


Appendix F

Conducted Emission at Power Port

According to FCC Part 15.107

ADAPTER TPCA-053065E

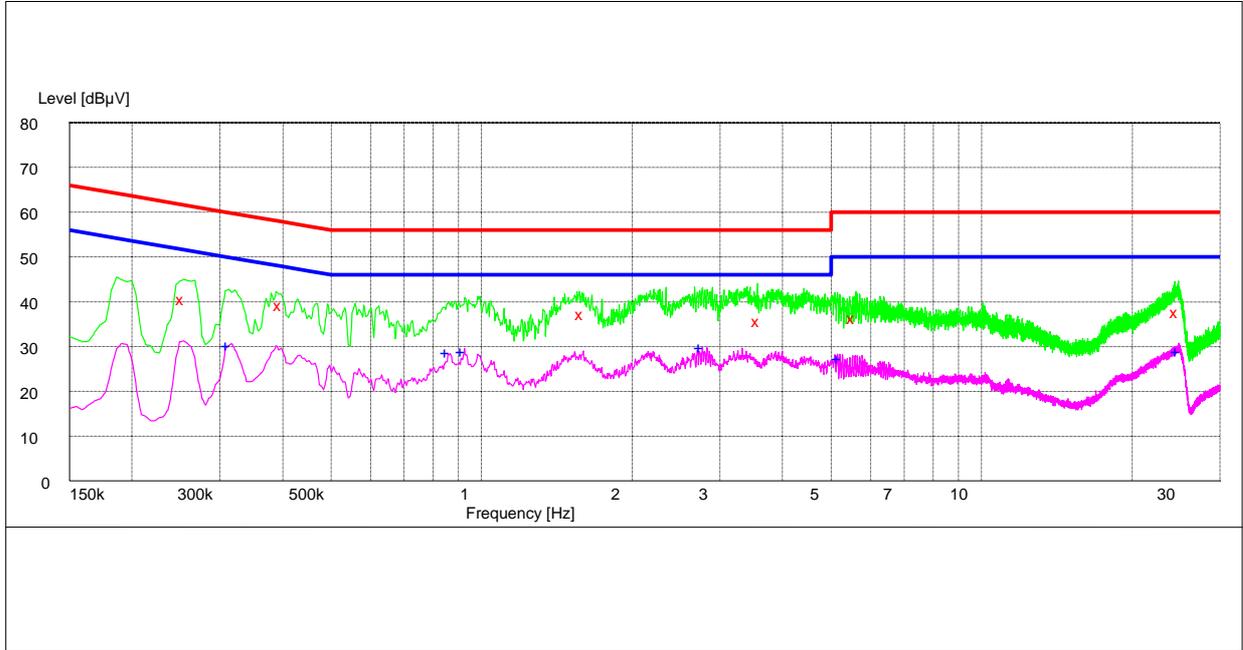


MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.253500	40.90	10.3	62	21.1	N	FLO
0.397500	39.40	10.1	58	18.6	N	FLO
1.594500	37.60	9.9	56	18.4	L3	FLO
3.588000	36.10	10.0	56	19.9	L3	FLO
5.568000	36.60	10.2	60	23.4	L3	FLO
24.652500	38.00	14.9	60	22.0	L3	FLO

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.312000	30.70	10.2	50	19.3	L3	FLO
0.856500	29.20	9.9	46	16.8	L3	FLO
0.919500	29.30	9.9	46	16.7	L3	FLO
2.755500	30.20	10.1	46	15.8	L3	FLO
5.194500	27.70	10.2	50	22.3	L3	FLO
24.720000	29.40	14.9	50	20.6	L3	FLO

ADAPTER XQLCHW03

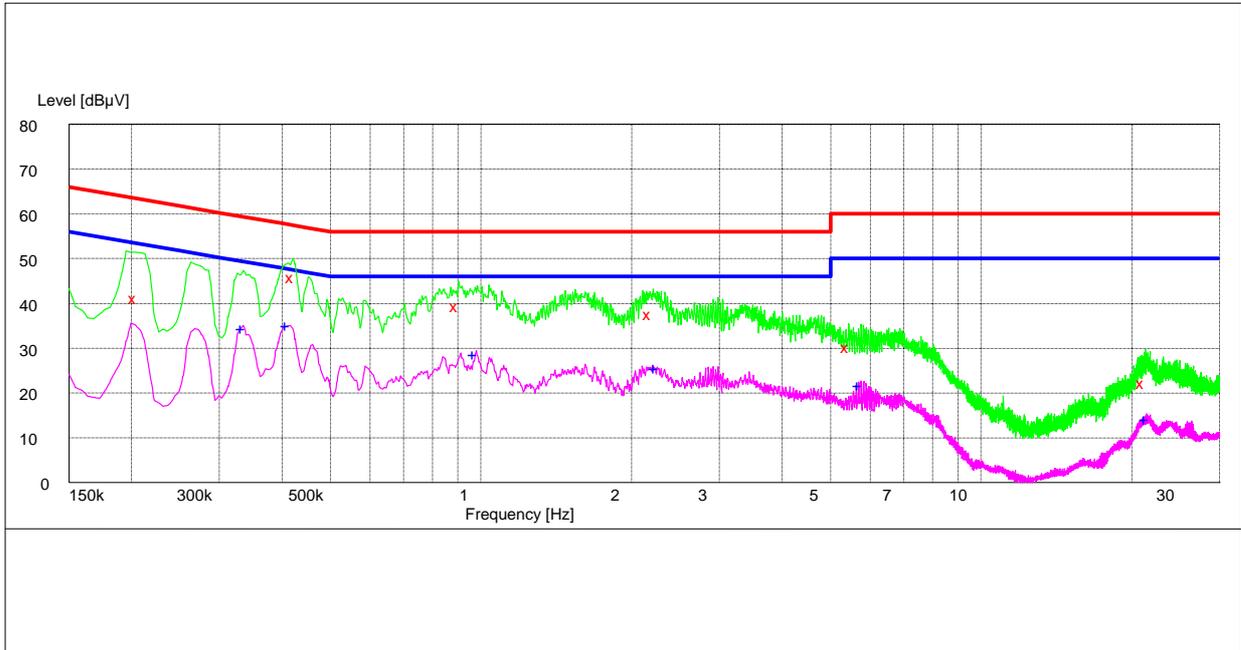

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.204000	41.50	10.1	63	21.5	N	FLO
0.420000	46.20	10.0	57	10.8	L3	FLO
0.897000	39.60	10.0	56	16.4	L3	FLO
2.179500	38.00	10.1	56	18.0	L3	FLO
5.419500	30.50	10.1	60	29.5	L3	FLO
21.147000	22.50	10.3	60	37.5	L3	FLO

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.334500	34.80	10.1	49	14.2	L3	FLO
0.411000	35.40	10.0	48	12.6	L3	FLO
0.973500	29.10	10.0	46	16.9	L3	FLO
2.242500	25.90	10.1	46	20.1	L3	FLO
5.743500	22.00	10.1	50	28.0	L3	FLO
21.417000	14.40	10.3	50	35.6	L3	FLO