


7.4.2.2 Channel 11@Ant 1

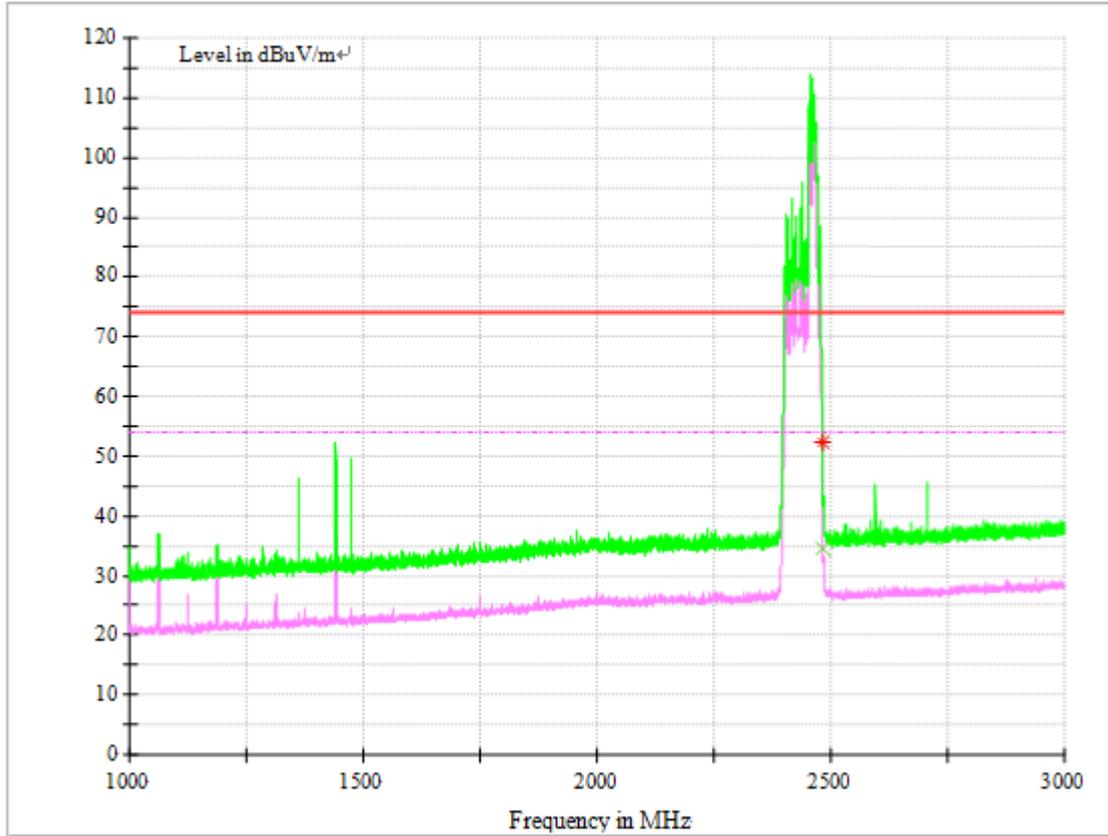

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.500000	34.57	54.00	19.43	106.0	H	232.0	-0.6

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	52.24	74.00	21.76	100.0	V	203.0	-2.6


Note2:

Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

7.4.3 Test Mode: 11N20

7.4.3.1 Channel 1 @Ant 1

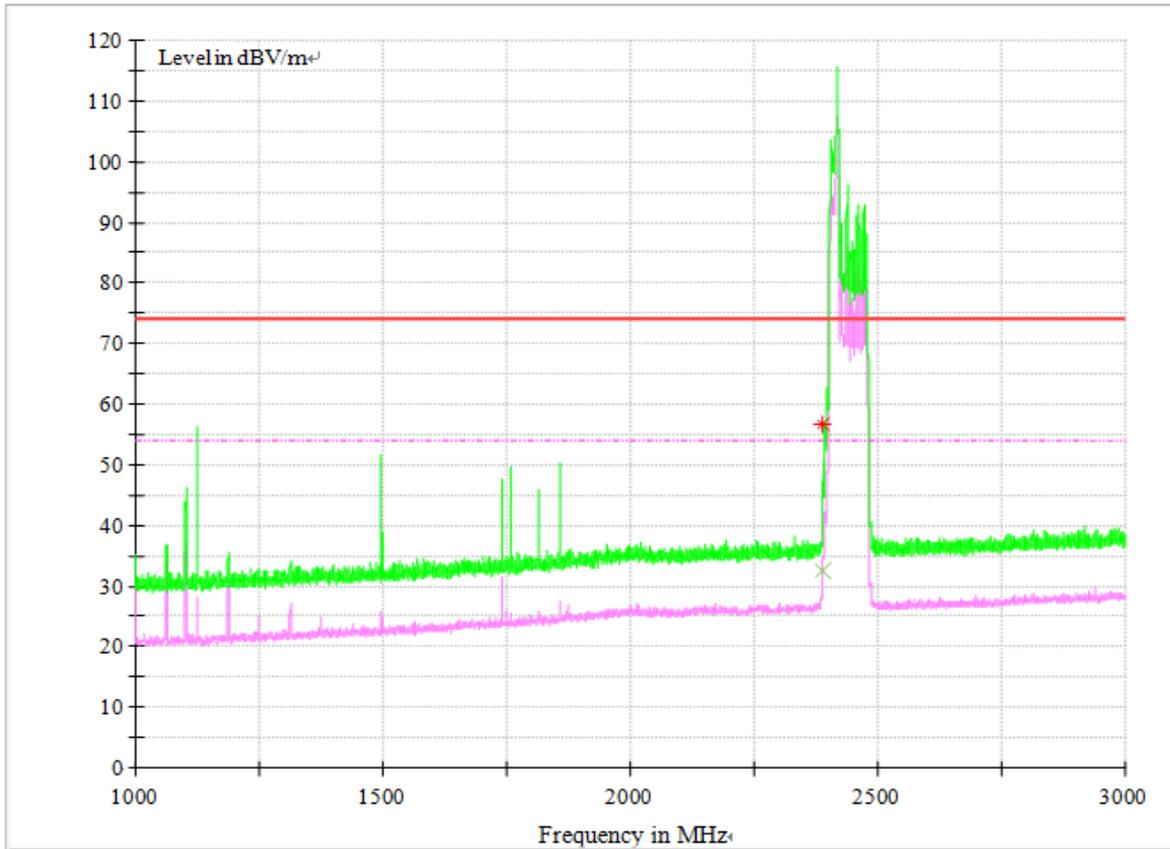

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2389.000000	32.67	54.00	21.33	100.0	H	165.0	-7.8

MEASUREMENT RESULT: PK Detector


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2389.000000	56.61	74.00	17.39	117.0	H	174.0	-7.8

Note2:

Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

7.4.3.2 Channel 11@Ant 1

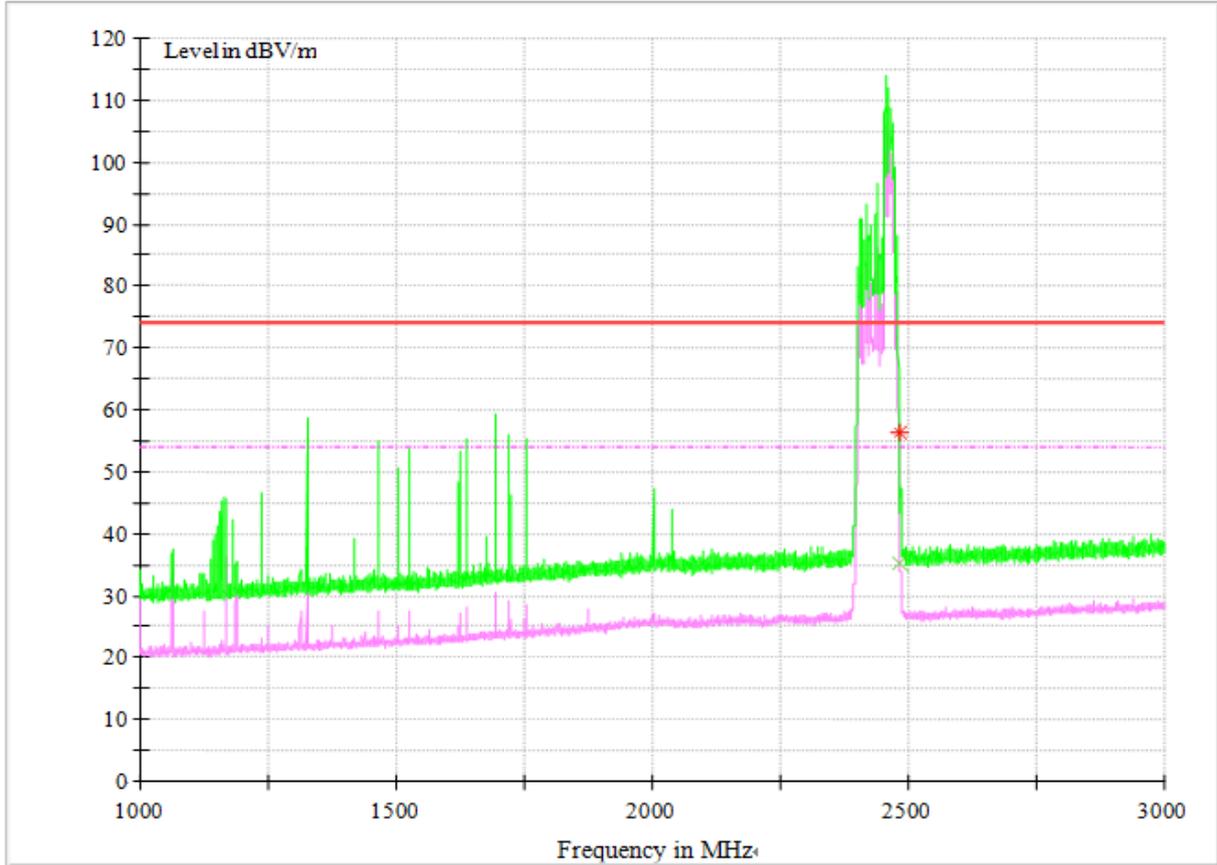

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.500000	35.04	54.00	18.96	100.0	V	170.0	-0.5

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.500000	56.26	74.00	17.74	100.0	V	169.0	-2.3


Note2:

Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

7.4 Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

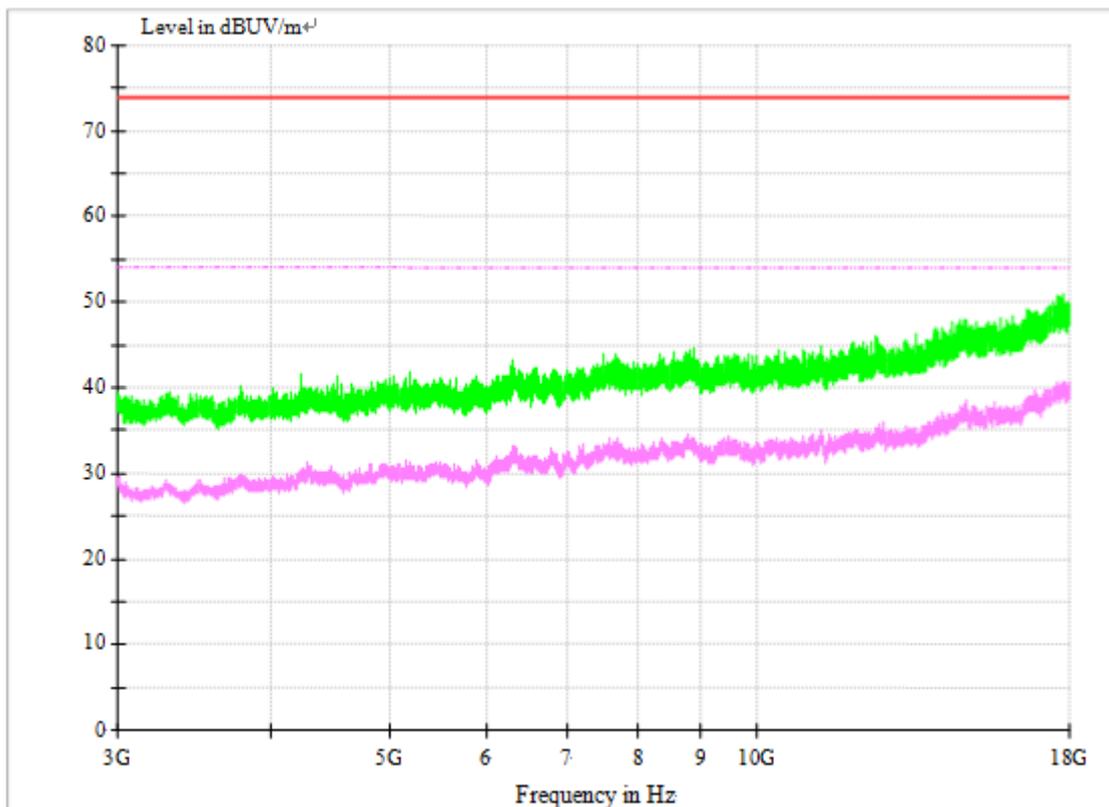


7.5 Part 5: Testing Range of “18 GHz to 26.5 GHz”

NOTE: No peak found in the Test Range of “18 GHz to 26.5GHz”

Appendix I: Conducted Emission at Power Port

Note: RBW = 9 kHz, VBW = 30 kHz

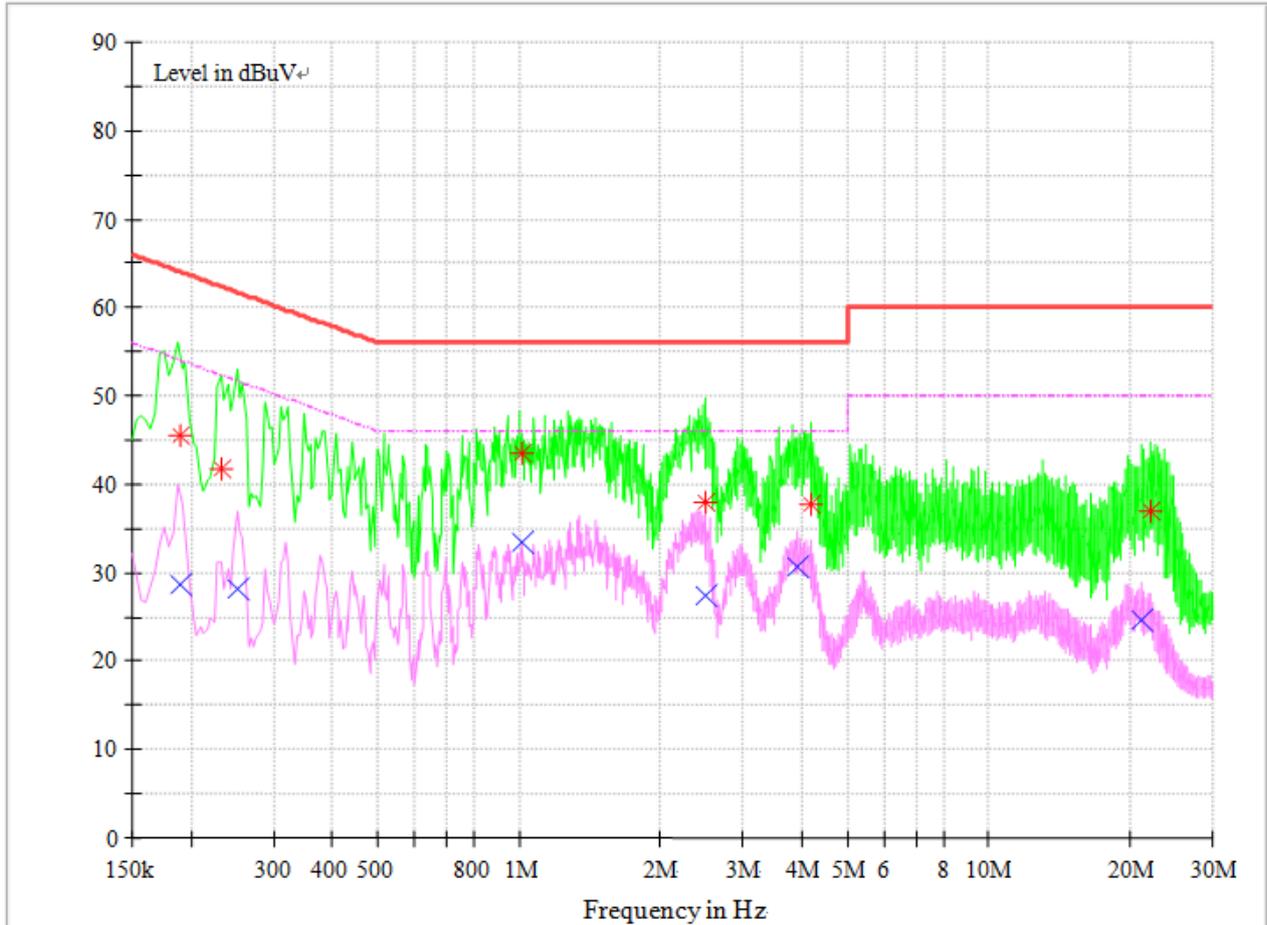

**MEASUREMENT RESULT: AV Detector**

Frequency (MHz)	Level (dB μ V)	Limit (dB μ V)	Transd. (dB)	Margin (dB)	Line	PE
0.190106	28.72	54.03	9.7	25.31	N	FLO
0.251702	28.13	51.70	9.7	23.57	N	FLO
1.011237	33.43	46.00	9.7	12.57	N	FLO
2.486828	27.31	46.00	9.7	18.69	N	FLO
3.930401	30.72	46.00	9.8	15.28	N	FLO
21.096418	24.75	50.00	10.2	25.25	N	FLO

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB μ V)	Limit (dB μ V)	Transd. (dB)	Margin (dB)	Line	PE
0.190026	45.59	64.04	9.7	18.44	N	FLO
0.232465	41.66	62.36	9.7	20.71	N	FLO
1.011246	43.51	56.00	9.7	12.49	N	FLO
2.487557	38.07	56.00	9.7	17.93	N	FLO
4.169932	37.74	56.00	9.8	18.26	N	FLO
22.216088	36.83	60.00	10.2	23.17	N	FLO

Note2:

Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

END