


FCC Test Report

FCC ID: QISCAM-L23

Project No. : 1603C159A
Equipment : Smart Phone
Model Name : CAM-L23
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : May 25, 2016
Date of Test : May 25, 2016 ~ Jun. 06, 2016
Issued Date : Jun. 07, 2016
Tested by : BTL Inc.

Testing Engineer : 
(Bill Zhang)

Technical Manager : 
(James Chiu)

Authorized Signatory : 
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	16
4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)	17
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	17
5 . MEASUREMENT INSTRUMENTS LIST	18
ATTACHMENT A - CONDUCTED EMISSION	19
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	44
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	69

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1603C159A	Original Issue.	Jun. 07, 2016

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI, honor
Model Name : CAM-L23
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : May 25, 2016 ~ Jun. 06, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1603C159A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE (2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	HUAWEI, honor
Model Name	CAM-L23
Model Difference	N/A
Frequency	GSM850/900/1800/1900 WCDMA B1/2/4/5/8 LTE B2/4/5/7/28 BT4.0 Wi-Fi : 802.11b/g/n
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) BYD Company Limited (2) SHENZHEN HUNTKEY ELECTRIC CO., LTD (3) Dongguan Phitek Electronics Co., Ltd Model: HW-050100U01 #2 Supplied from battery.
Power Rating	#1 I/P: 100V~240V~ 50/60 Hz,0.2A O/P: 5V $\overline{=}$ 1A #2 DC 3.8V
HW Version	HL4CAMLML
SW Version	CAM-L23C900B018

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.

Item	Mfr/Brand	Model.
USB Cable	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	CUBB01M-HC304-DH
	Unirise Communication Technology Co Ltd.	LSA00732
	Shenzhen Luxshare Precision Industry Co.,Ltd.	L99U2017-CS-H
	SHEN ZHEN PANG NGAI INDUSTRIAL CO., LTD.	H09-000577
	CONNREX (SHEN ZHEN) INDUSTRIAL.,LTD.	130-26988
Earphone	GoerTek Inc	CD-U0405-1143
	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD.	1293#+3283# 3.5MM-150
	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	MEMD1532B528000
	MERRY ELECTRONICS CO., LTD.	EMC323-011-01
	GoerTek Inc	HG-04A
Battery	Sunwoda Electronic Co., LTD	HB396481EBC
	SCUD (FUJIAN) Electronics Co., Ltd	
	Desay Battery Co., Ltd.	

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	USB copy(EUT with PC)+Idle+ Earphone
Mode 2	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Mode 3	Adapter+Idle+Playing+Speaker
Mode 4	Adapter+Traffic (GSM)+ Earphone
Mode 5	Adapter+Traffic (WCDMA)
Mode 6	Adapter+Traffic (LTE)


The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	USB copy(EUT with PC)+Idle+ Earphone
Mode 2	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Mode 3	Adapter+Idle+Playing+Speaker
Mode 4	Adapter+Traffic (GSM)+ Earphone
Mode 5	Adapter+Traffic (WCDMA)
Mode 6	Adapter+Traffic (LTE)

For Radiated Test	
Final Test Mode	Description
Mode 1	USB copy(EUT with PC)+Idle+ Earphone
Mode 2	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Mode 3	Adapter+Idle+Playing+Speaker
Mode 4	Adapter+Traffic (GSM)+ Earphone
Mode 5	Adapter+Traffic (WCDMA)
Mode 6	Adapter+Traffic (LTE)

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode 1

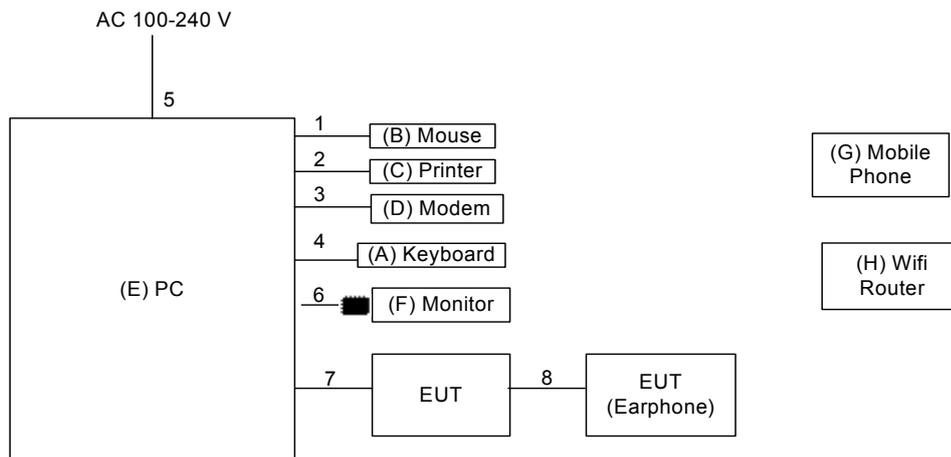


Ground plane

Remote System

■ Ferrite core

Mode 2-6

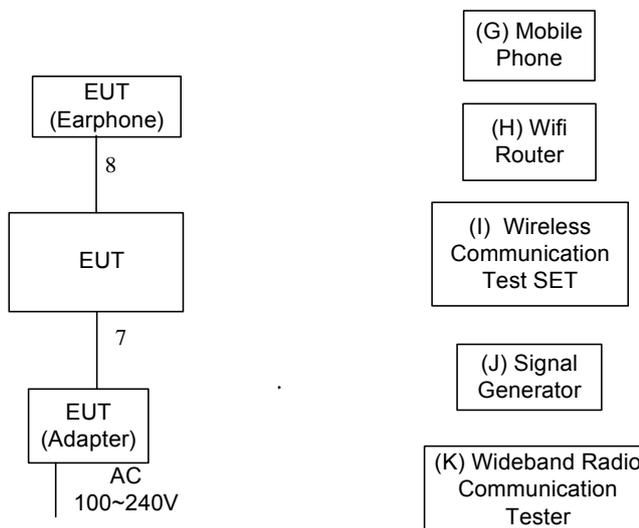

Ground plane

Remote System

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589071 T08NE
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	PC	Dell	DCSM 745	DOC	G7K832X
F	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-64180-6 AG-1WNS
G	Mobile phone	samsung	SGH-1747	A3LSGH1747	R31C208VLDB
H	Router	TP-LINK	TL-WR1041N	DOC	N/A
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183
J	Signal Generator	Agilent	E4438C	N/A	MY49071316
K	Wideband Radio Communication Tester	RS	CMW500	N/A	122125

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.2m	Earphone Cable

Note:

(1) For detachable type I/O cable should be specified the length m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value – Limit Value


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

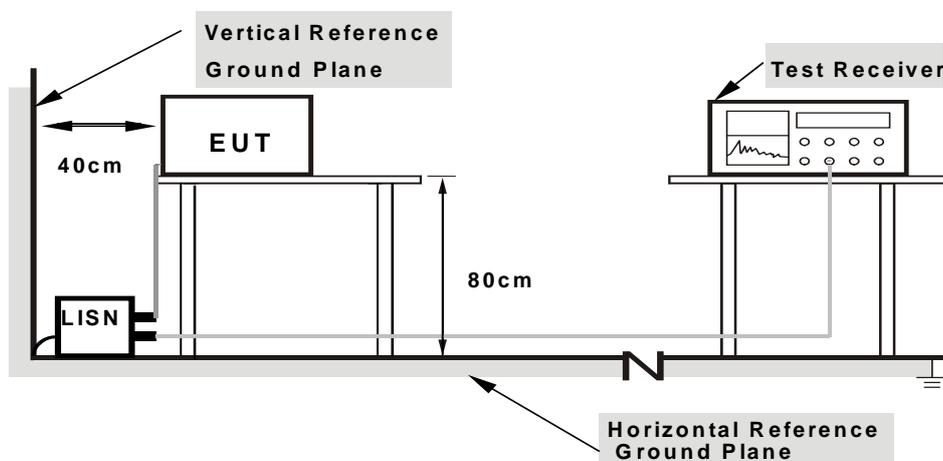

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 24°C Relative Humidity: 60%

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

CISPR 22 or CAN/CSA-CISPR 22-10:

Frequency (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	
30 - 230	40	30
230 - 1000	47	37

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

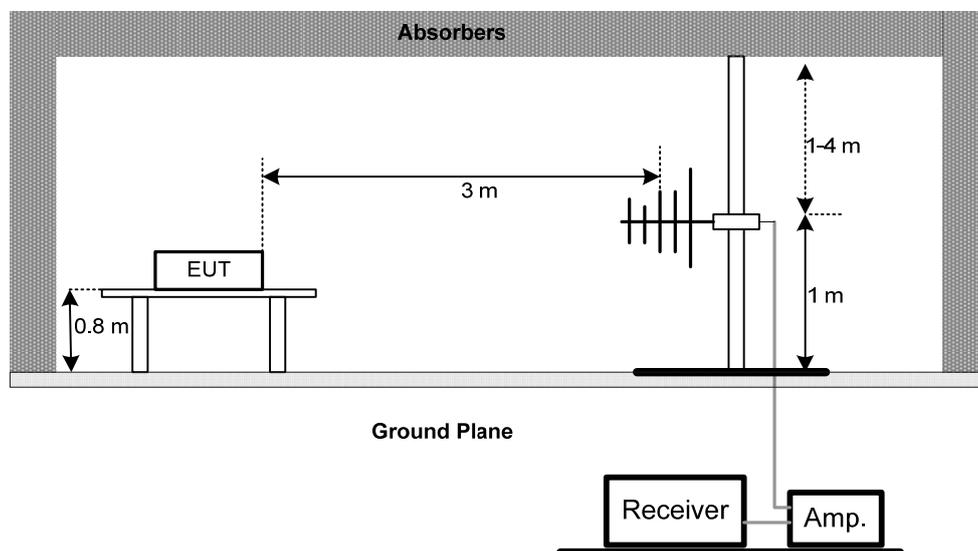

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

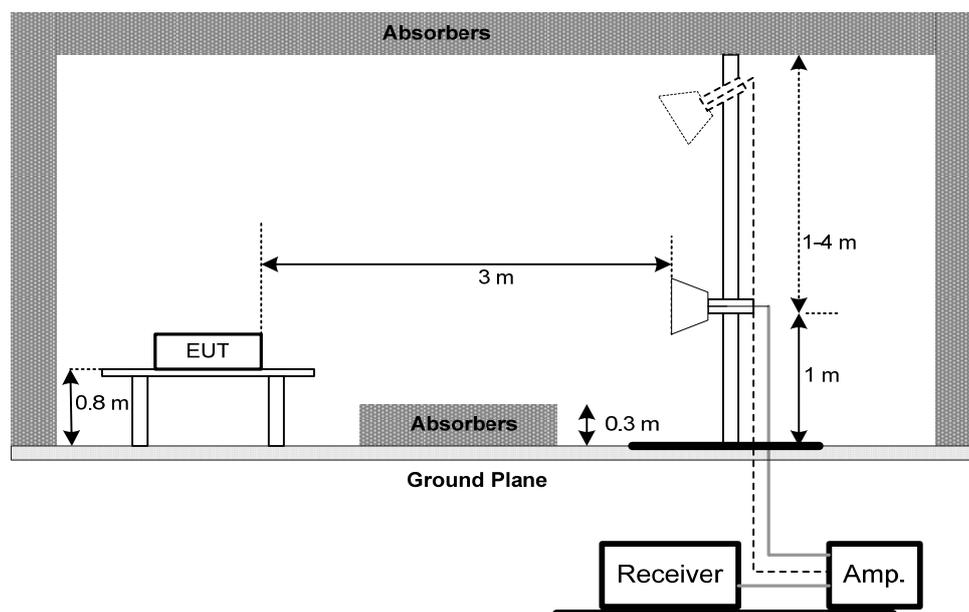

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 25°C Relative Humidity: 60%

4.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C

Temperature: 25°C Relative Humidity: 60%

Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (2) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 28, 2016
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Antenna	ETS	3115	00075789	Mar. 27, 2017
8	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
9	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
10	Test Cable	emci	EMC104-SM-SM-1000(1GHz – 26.5GHz)	C-68	Jun. 28, 2016
11	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Unirise +Battery: SCUD+ Earphone: QUANCHENG


Line

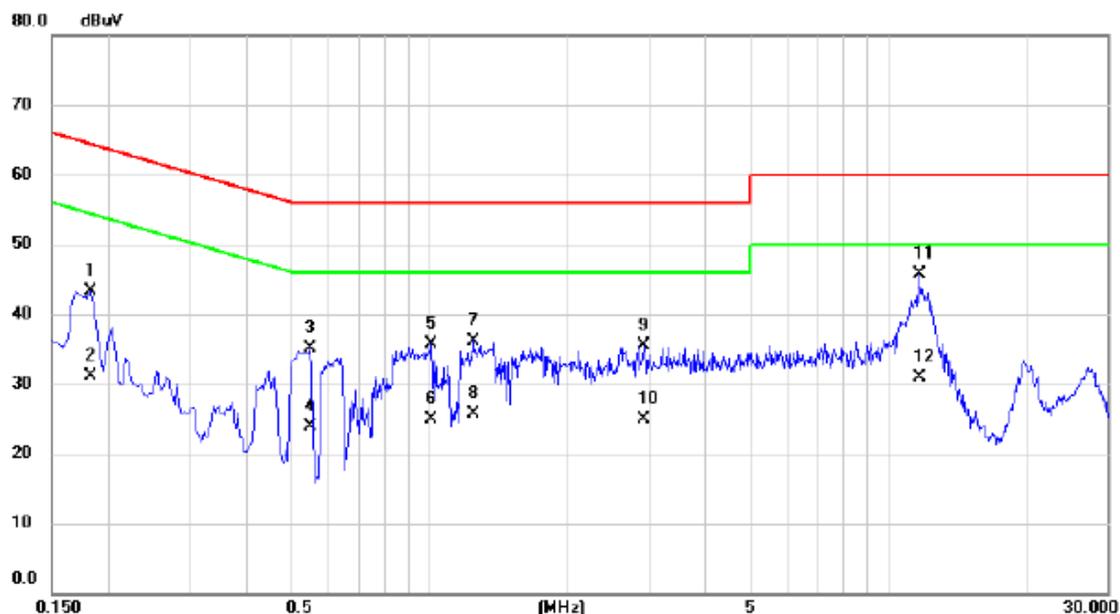

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1820	33.83	9.53	43.36	64.39	-21.03	QP	
2		0.1820	21.60	9.53	31.13	54.39	-23.26	AVG	
3		0.5500	25.47	9.64	35.11	56.00	-20.89	QP	
4		0.5500	14.30	9.64	23.94	46.00	-22.06	AVG	
5		1.0100	25.97	9.76	35.73	56.00	-20.27	QP	
6		1.0100	15.20	9.76	24.96	46.00	-21.04	AVG	
7		1.2420	26.42	9.78	36.20	56.00	-19.80	QP	
8		1.2420	15.90	9.78	25.68	46.00	-20.32	AVG	
9		2.9180	25.49	10.09	35.58	56.00	-20.42	QP	
10		2.9180	14.80	10.09	24.89	46.00	-21.11	AVG	
11	*	11.6820	35.44	10.26	45.70	60.00	-14.30	QP	
12		11.6820	20.60	10.26	30.86	50.00	-19.14	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Unirise +Battery: SCUD+ Earphone: QUANCHENG


Neutral

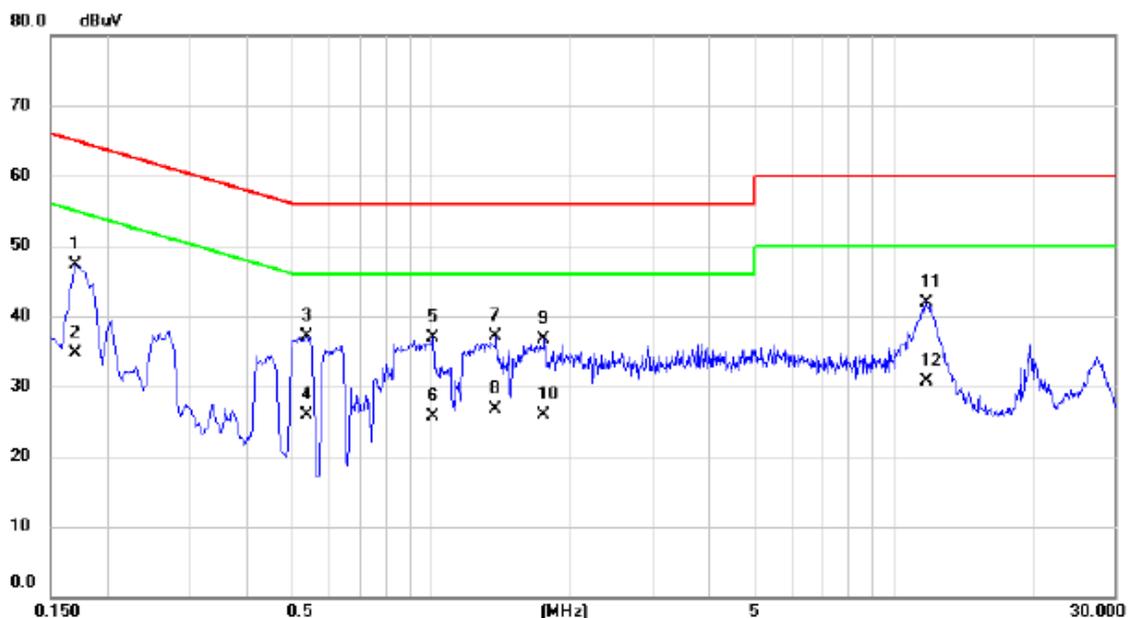

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1700	37.85	9.42	47.27	64.96	-17.69	QP	
2	0.1700	25.20	9.42	34.62	54.96	-20.34	AVG	
3	0.5380	27.61	9.44	37.05	56.00	-18.95	QP	
4	0.5380	16.40	9.44	25.84	46.00	-20.16	AVG	
5	1.0100	27.23	9.66	36.89	56.00	-19.11	QP	
6	1.0100	16.10	9.66	25.76	46.00	-20.24	AVG	
7	1.3780	27.39	9.67	37.06	56.00	-18.94	QP	
8	1.3780	17.00	9.67	26.67	46.00	-19.33	AVG	
9	1.7460	27.05	9.68	36.73	56.00	-19.27	QP	
10	1.7460	16.20	9.68	25.88	46.00	-20.12	AVG	
11	11.7740	31.54	10.33	41.87	60.00	-18.13	QP	
12	11.7740	20.40	10.33	30.73	50.00	-19.27	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: PANG NGAI +Battery: Desay + Earphone: LIANCHUANG


Line

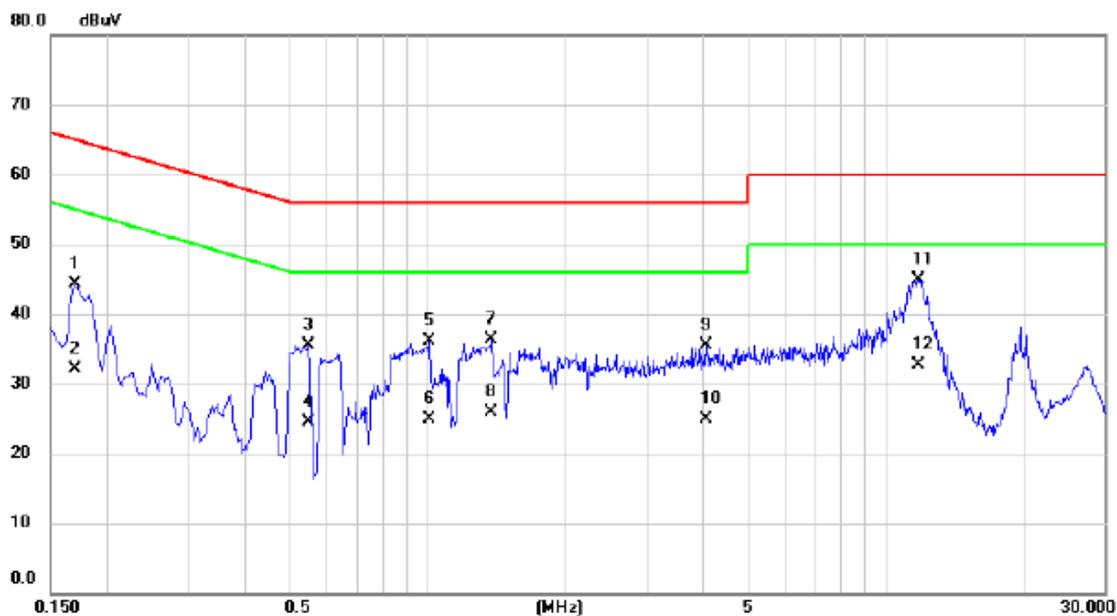

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1700	34.81	9.52	44.33	64.96	-20.63	QP	
2		0.1700	22.60	9.52	32.12	54.96	-22.84	AVG	
3		0.5500	25.91	9.64	35.55	56.00	-20.45	QP	
4		0.5500	14.90	9.64	24.54	46.00	-21.46	AVG	
5		1.0100	26.43	9.76	36.19	56.00	-19.81	QP	
6		1.0100	15.20	9.76	24.96	46.00	-21.04	AVG	
7		1.3780	26.47	9.83	36.30	56.00	-19.70	QP	
8		1.3780	16.10	9.83	25.93	46.00	-20.07	AVG	
9		4.0380	25.33	10.18	35.51	56.00	-20.49	QP	
10		4.0380	14.80	10.18	24.98	46.00	-21.02	AVG	
11	*	11.7780	34.65	10.27	44.92	60.00	-15.08	QP	
12		11.7780	22.40	10.27	32.67	50.00	-17.33	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: PANG NGAI +Battery: Desay + Earphone: LIANCHUANG


Neutral

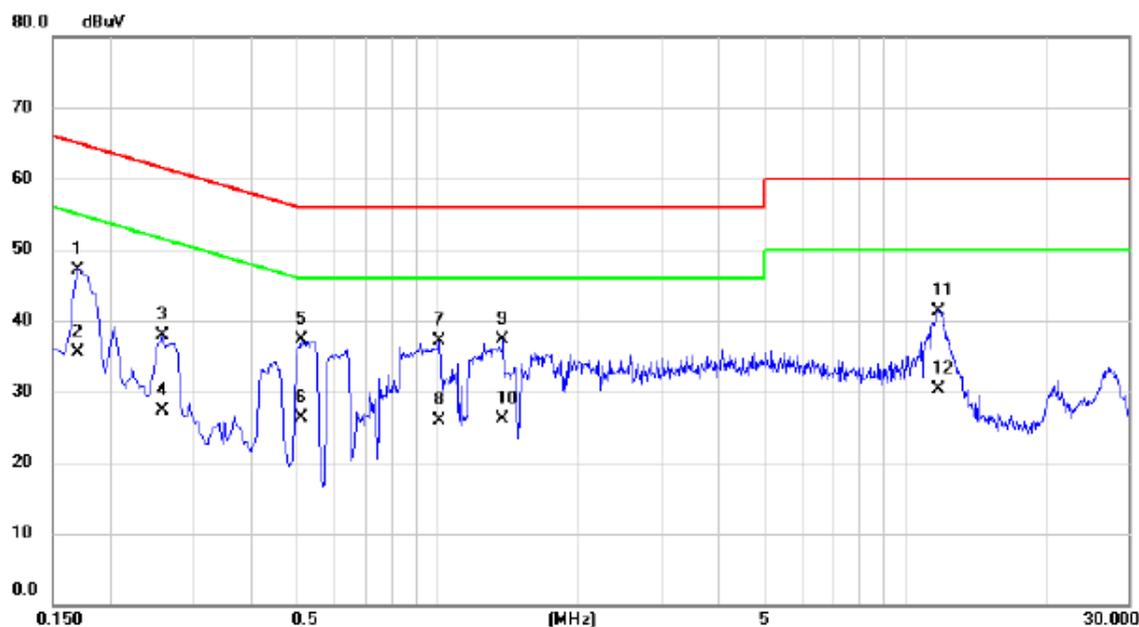

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1700	37.78	9.42	47.20	64.96	-17.76	QP	
2	0.1700	26.10	9.42	35.52	54.96	-19.44	AVG	
3	0.2580	28.32	9.53	37.85	61.50	-23.65	QP	
4	0.2580	17.80	9.53	27.33	51.50	-24.17	AVG	
5	0.5100	27.92	9.44	37.36	56.00	-18.64	QP	
6	0.5100	16.80	9.44	26.24	46.00	-19.76	AVG	
7	1.0100	27.42	9.66	37.08	56.00	-18.92	QP	
8	1.0100	16.20	9.66	25.86	46.00	-20.14	AVG	
9	1.3780	27.55	9.67	37.22	56.00	-18.78	QP	
10	1.3780	16.40	9.67	26.07	46.00	-19.93	AVG	
11	11.7820	31.07	10.33	41.40	60.00	-18.60	QP	
12	11.7820	19.90	10.33	30.23	50.00	-19.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: CONNREX +Battery: Sunwoda + Earphone: GoerTek / HA1-3


Line

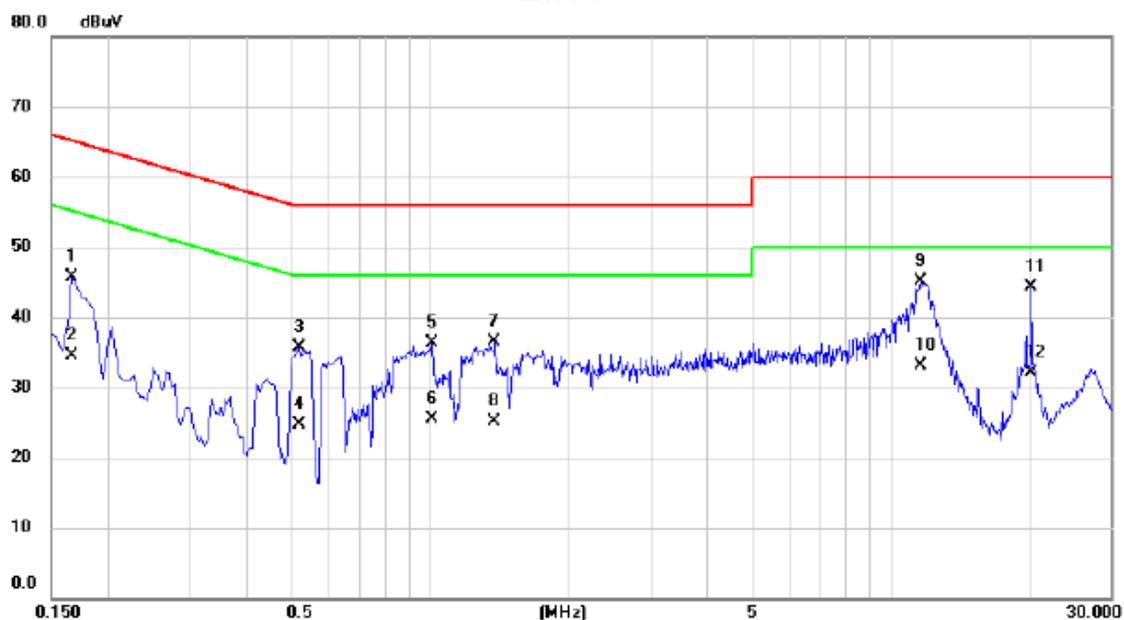

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1660	36.18	9.52	45.70	65.16	-19.46	QP	
2	0.1660	24.90	9.52	34.42	55.16	-20.74	AVG	
3	0.5180	26.10	9.64	35.74	56.00	-20.26	QP	
4	0.5180	15.00	9.64	24.64	46.00	-21.36	AVG	
5	1.0100	26.62	9.76	36.38	56.00	-19.62	QP	
6	1.0100	15.70	9.76	25.46	46.00	-20.54	AVG	
7	1.3780	26.64	9.83	36.47	56.00	-19.53	QP	
8	1.3780	15.20	9.83	25.03	46.00	-20.97	AVG	
9 *	11.5860	34.76	10.26	45.02	60.00	-14.98	QP	
10	11.5860	22.80	10.26	33.06	50.00	-16.94	AVG	
11	20.1340	33.81	10.40	44.21	60.00	-15.79	QP	
12	20.1340	21.70	10.40	32.10	50.00	-17.90	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: CONNREX +Battery: Sunwoda + Earphone: GoerTek / HA1-3


Neutral

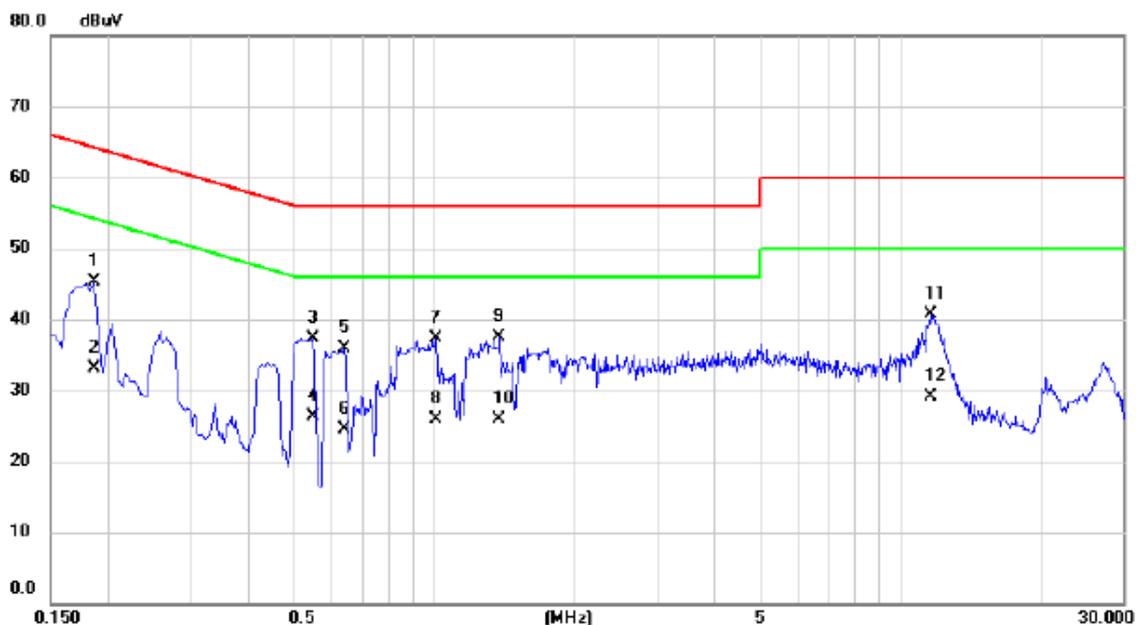

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1860	35.90	9.48	45.38	64.21	-18.83	QP	
2	0.1860	23.60	9.48	33.08	54.21	-21.13	AVG	
3	0.5500	27.96	9.44	37.40	56.00	-18.60	QP	
4	0.5500	16.80	9.44	26.24	46.00	-19.76	AVG	
5	0.6420	26.48	9.44	35.92	56.00	-20.08	QP	
6	0.6420	15.10	9.44	24.54	46.00	-21.46	AVG	
7	1.0100	27.62	9.66	37.28	56.00	-18.72	QP	
8	1.0100	16.30	9.66	25.96	46.00	-20.04	AVG	
9 *	1.3780	27.83	9.67	37.50	56.00	-18.50	QP	
10	1.3780	16.20	9.67	25.87	46.00	-20.13	AVG	
11	11.5860	30.32	10.33	40.65	60.00	-19.35	QP	
12	11.5860	18.80	10.33	29.13	50.00	-20.87	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Luxshare +Battery: Desay + Earphone: GoerTek / HG-04A


Line

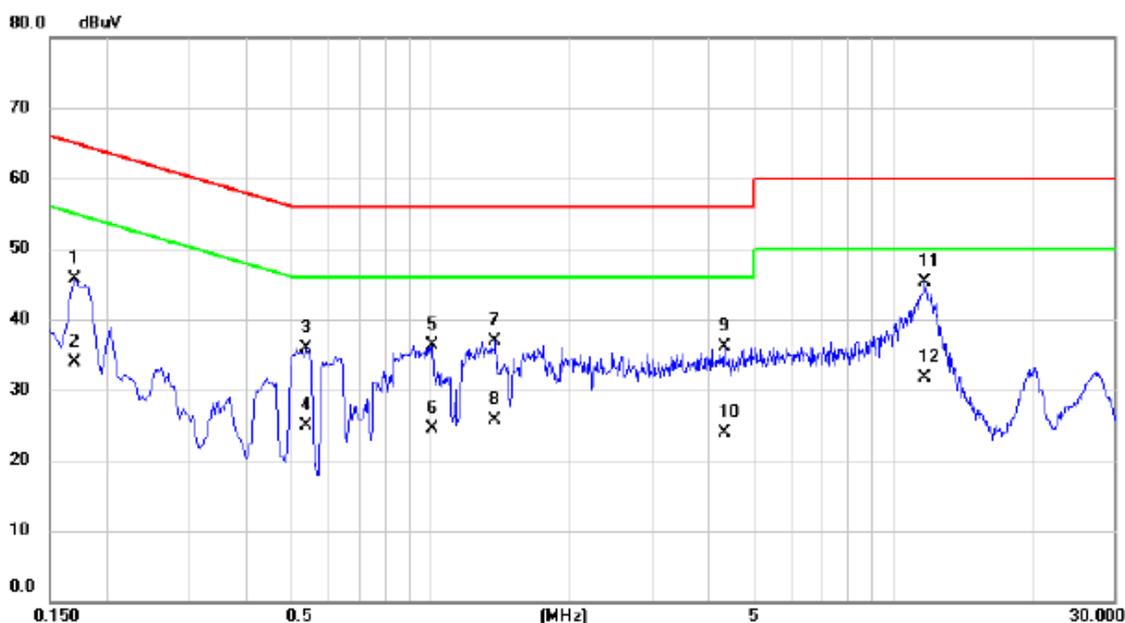

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1700	36.28	9.52	45.80	64.96	-19.16	QP	
2		0.1700	24.30	9.52	33.82	54.96	-21.14	AVG	
3		0.5380	26.29	9.64	35.93	56.00	-20.07	QP	
4		0.5380	15.30	9.64	24.94	46.00	-21.06	AVG	
5		1.0100	26.55	9.76	36.31	56.00	-19.69	QP	
6		1.0100	14.70	9.76	24.46	46.00	-21.54	AVG	
7		1.3780	27.07	9.83	36.90	56.00	-19.10	QP	
8		1.3780	15.80	9.83	25.63	46.00	-20.37	AVG	
9		4.3140	26.03	10.13	36.16	56.00	-19.84	QP	
10		4.3140	13.80	10.13	23.93	46.00	-22.07	AVG	
11	*	11.6580	35.05	10.26	45.31	60.00	-14.69	QP	
12		11.6580	21.40	10.26	31.66	50.00	-18.34	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Luxshare +Battery: Desay + Earphone: GoerTek / HG-04A


Neutral

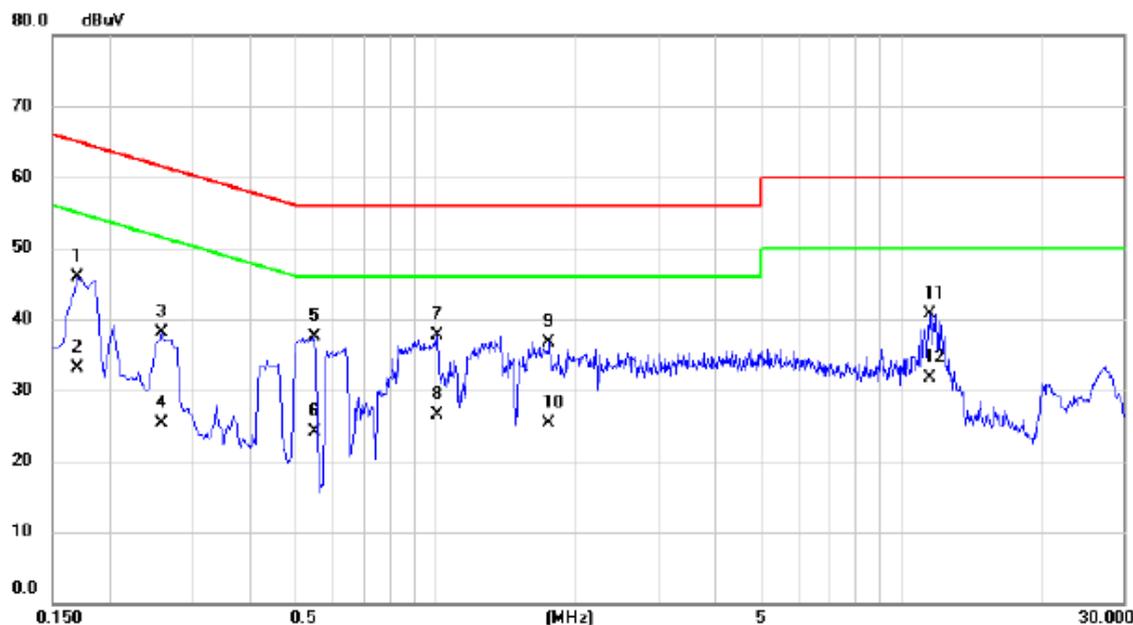

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1700	36.40	9.42	45.82	64.96	-19.14	QP	
2		0.1700	23.60	9.42	33.02	54.96	-21.94	AVG	
3		0.2580	28.67	9.53	38.20	61.50	-23.30	QP	
4		0.2580	15.70	9.53	25.23	51.50	-26.27	AVG	
5		0.5500	28.04	9.44	37.48	56.00	-18.52	QP	
6		0.5500	14.70	9.44	24.14	46.00	-21.86	AVG	
7		1.0100	27.99	9.66	37.65	56.00	-18.35	QP	
8		1.0100	16.80	9.66	26.46	46.00	-19.54	AVG	
9		1.7460	26.95	9.68	36.63	56.00	-19.37	QP	
10		1.7460	15.70	9.68	25.38	46.00	-20.62	AVG	
11		11.5220	30.39	10.33	40.72	60.00	-19.28	QP	
12	*	11.5220	21.40	10.33	31.73	50.00	-18.27	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: FOXCONN +Battery: Sunwoda + Earphone: MERRY


Line

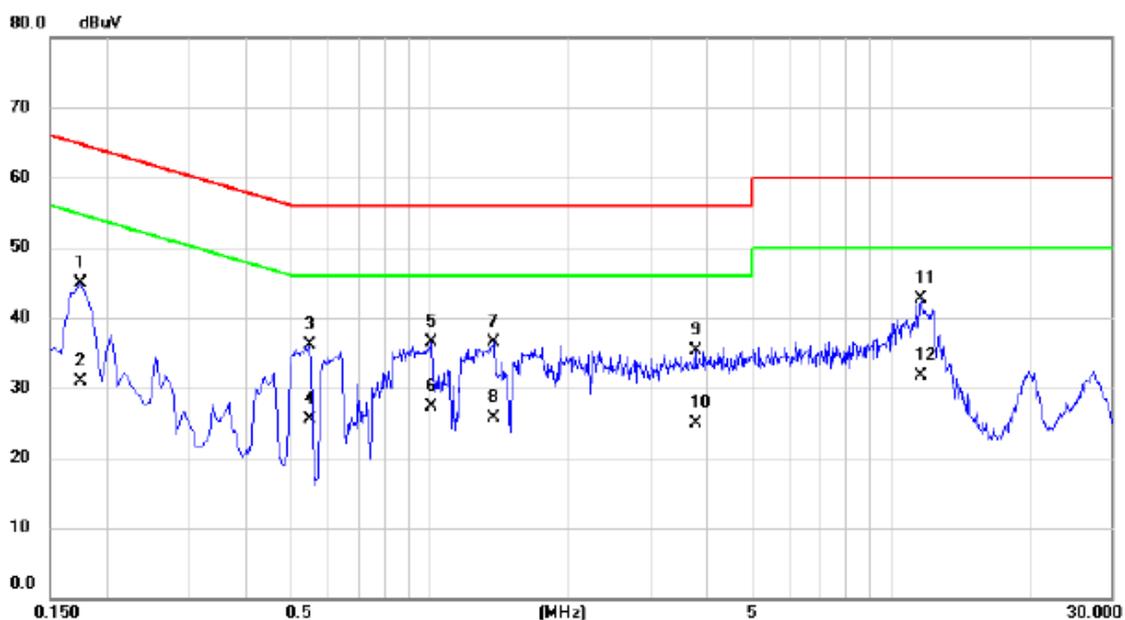

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1740	35.48	9.52	45.00	64.77	-19.77	QP	
2		0.1740	21.40	9.52	30.92	54.77	-23.85	AVG	
3		0.5500	26.41	9.64	36.05	56.00	-19.95	QP	
4		0.5500	15.80	9.64	25.44	46.00	-20.56	AVG	
5		1.0100	26.77	9.76	36.53	56.00	-19.47	QP	
6		1.0100	17.60	9.76	27.36	46.00	-18.64	AVG	
7		1.3780	26.69	9.83	36.52	56.00	-19.48	QP	
8		1.3780	15.80	9.83	25.63	46.00	-20.37	AVG	
9		3.7660	25.19	10.17	35.36	56.00	-20.64	QP	
10		3.7660	14.80	10.17	24.97	46.00	-21.03	AVG	
11	*	11.5860	32.50	10.26	42.76	60.00	-17.24	QP	
12		11.5860	21.40	10.26	31.66	50.00	-18.34	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: FOXCONN +Battery: Sunwoda + Earphone: MERRY


Neutral

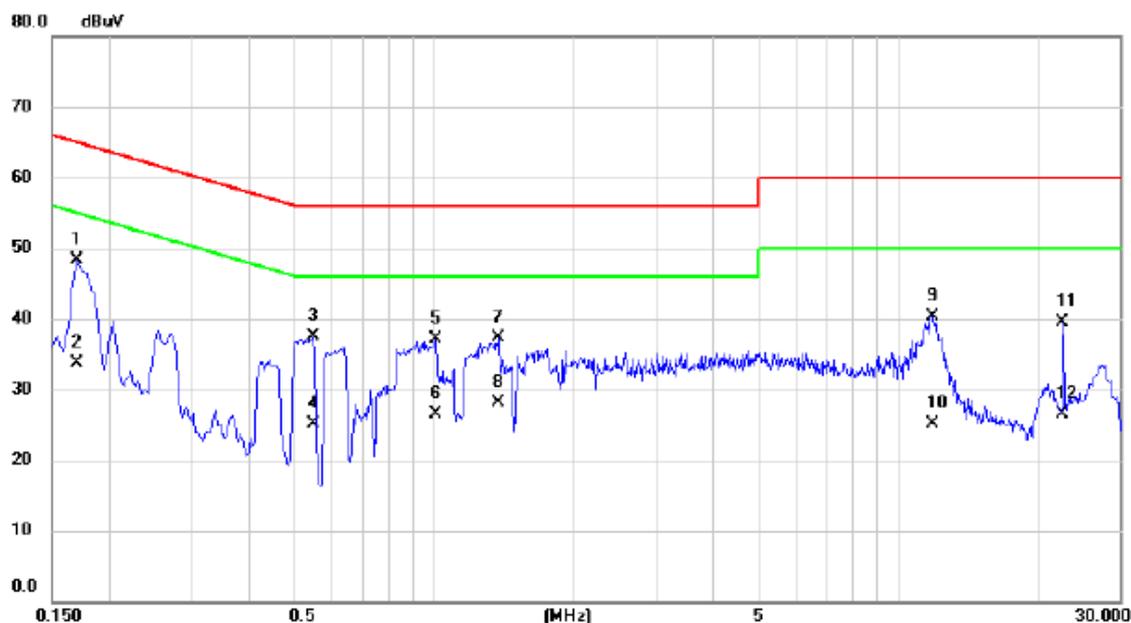

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1700	38.89	9.42	48.31	64.96	-16.65	QP	
2		0.1700	24.30	9.42	33.72	54.96	-21.24	AVG	
3		0.5500	28.04	9.44	37.48	56.00	-18.52	QP	
4		0.5500	15.70	9.44	25.14	46.00	-20.86	AVG	
5		1.0100	27.50	9.66	37.16	56.00	-18.84	QP	
6		1.0100	16.80	9.66	26.46	46.00	-19.54	AVG	
7		1.3780	27.66	9.67	37.33	56.00	-18.67	QP	
8		1.3780	18.40	9.67	28.07	46.00	-17.93	AVG	
9		11.8540	29.96	10.33	40.29	60.00	-19.71	QP	
10		11.8540	14.70	10.33	25.03	50.00	-24.97	AVG	
11		22.5860	28.94	10.52	39.46	60.00	-20.54	QP	
12		22.5860	15.90	10.52	26.42	50.00	-23.58	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: BYD +USB Cable: Unirise +Battery: SCUD + Earphone: QUANCHENG


Line

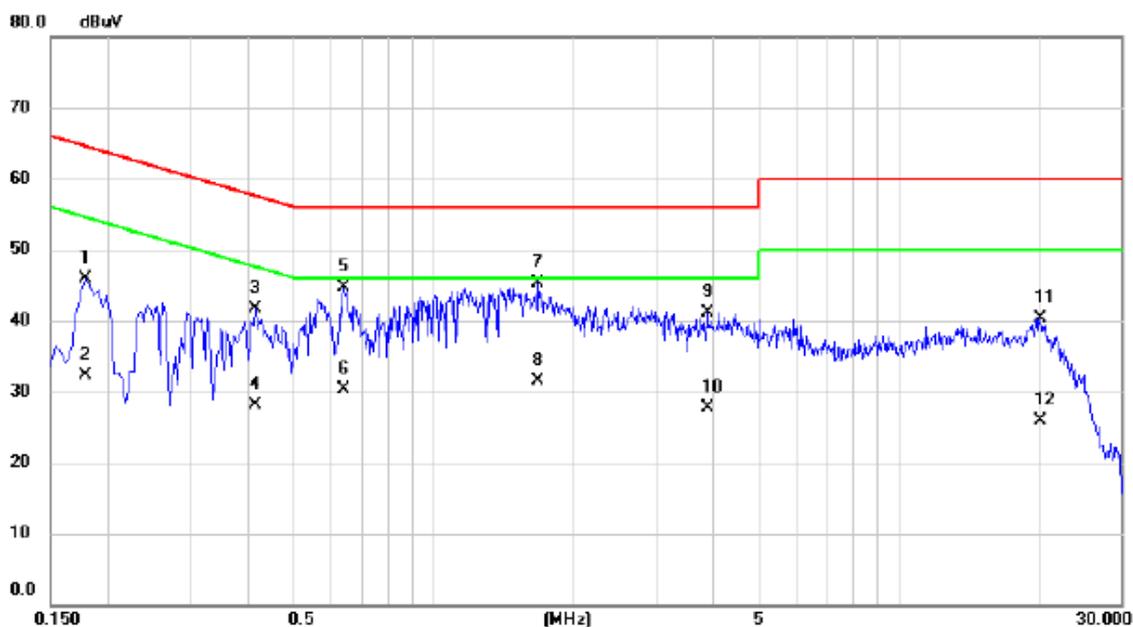

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment	dBuV	dB	Detector	Comment
1		0.1780	36.44	9.53	45.97	64.58	-18.61	QP	
2		0.1780	22.70	9.53	32.23	54.58	-22.35	AVG	
3		0.4140	32.06	9.55	41.61	57.57	-15.96	QP	
4		0.4140	18.50	9.55	28.05	47.57	-19.52	AVG	
5		0.6420	34.97	9.64	44.61	56.00	-11.39	QP	
6		0.6420	20.60	9.64	30.24	46.00	-15.76	AVG	
7	*	1.6780	35.36	9.88	45.24	56.00	-10.76	QP	
8		1.6780	21.60	9.88	31.48	46.00	-14.52	AVG	
9		3.8780	30.98	10.18	41.16	56.00	-14.84	QP	
10		3.8780	17.50	10.18	27.68	46.00	-18.32	AVG	
11		20.1780	29.94	10.40	40.34	60.00	-19.66	QP	
12		20.1780	15.60	10.40	26.00	50.00	-24.00	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: BYD +USB Cable: Unirise +Battery: SCUD + Earphone: QUANCHENG


Neutral

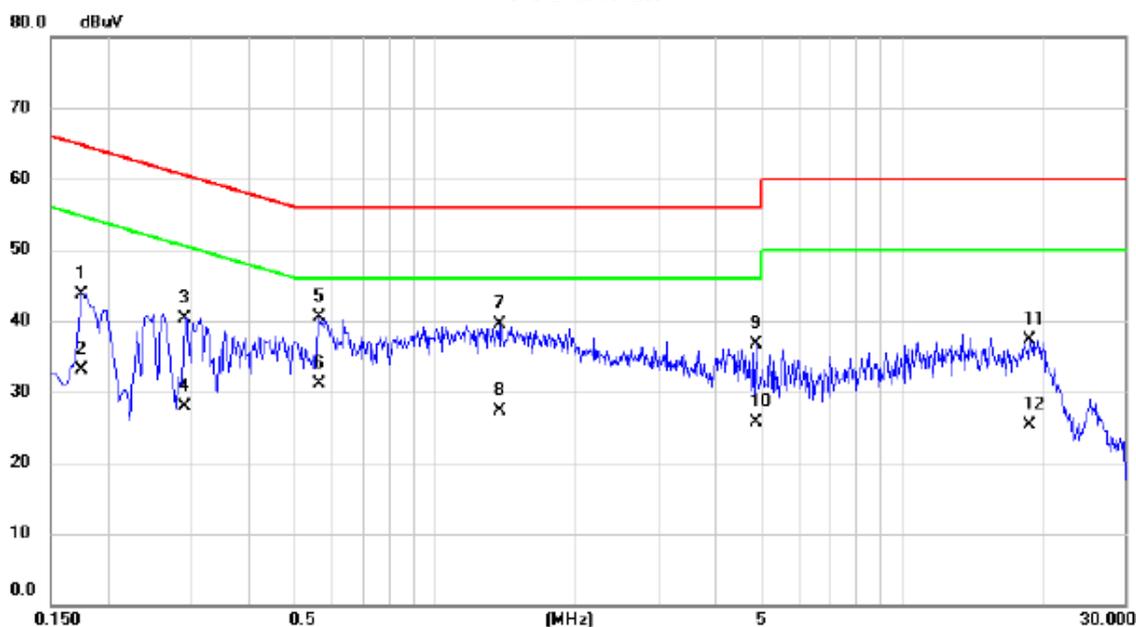

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1740	34.32	9.43	43.75	64.77	-21.02	QP	
2		0.1740	23.60	9.43	33.03	54.77	-21.74	AVG	
3		0.2900	30.87	9.53	40.40	60.52	-20.12	QP	
4		0.2900	18.40	9.53	27.93	50.52	-22.59	AVG	
5		0.5660	30.99	9.44	40.43	56.00	-15.57	QP	
6	*	0.5660	21.70	9.44	31.14	46.00	-14.86	AVG	
7		1.3740	29.81	9.67	39.48	56.00	-16.52	QP	
8		1.3740	17.60	9.67	27.27	46.00	-18.73	AVG	
9		4.8580	26.82	9.98	36.80	56.00	-19.20	QP	
10		4.8580	15.70	9.98	25.68	46.00	-20.32	AVG	
11		18.7980	26.87	10.47	37.34	60.00	-22.66	QP	
12		18.7980	14.80	10.47	25.27	50.00	-24.73	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: HK + USB Cable: Unirise +Battery: SCUD + Earphone: QUANCHENG


Line

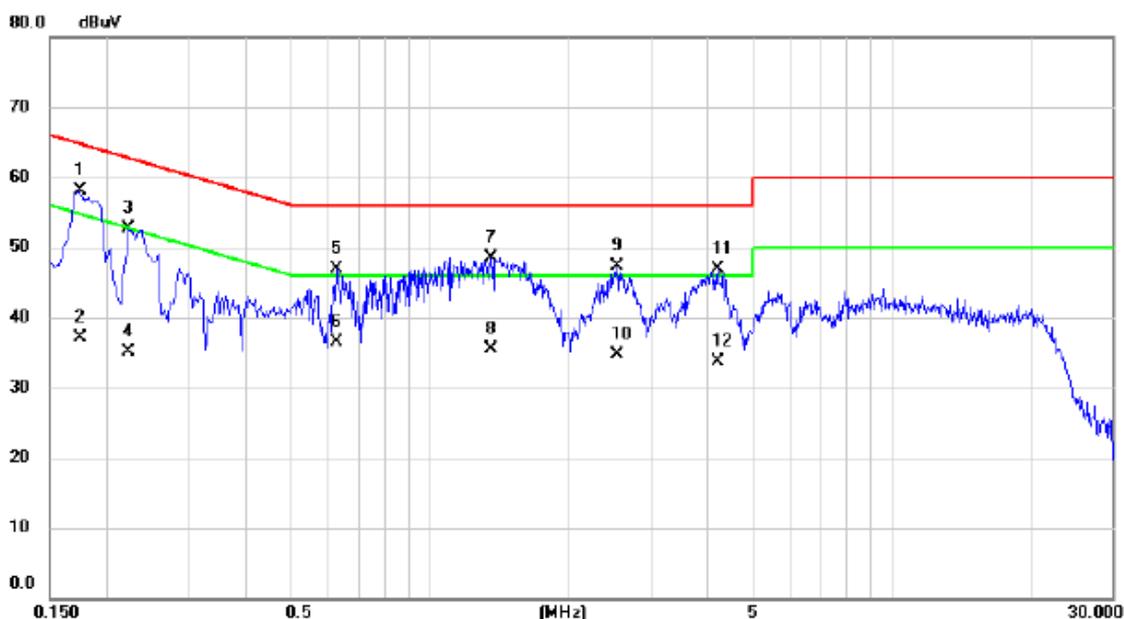

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1740	48.64	9.52	58.16	64.77	-6.61	QP	
2		0.1740	27.50	9.52	37.02	54.77	-17.75	AVG	
3		0.2220	43.18	9.53	52.71	62.74	-10.03	QP	
4		0.2220	25.60	9.53	35.13	52.74	-17.61	AVG	
5		0.6260	37.33	9.64	46.97	56.00	-9.03	QP	
6		0.6260	26.80	9.64	36.44	46.00	-9.56	AVG	
7		1.3500	38.75	9.82	48.57	56.00	-7.43	QP	
8		1.3500	25.70	9.82	35.52	46.00	-10.48	AVG	
9		2.5340	37.12	10.09	47.21	56.00	-8.79	QP	
10		2.5340	24.70	10.09	34.79	46.00	-11.21	AVG	
11		4.1980	36.78	10.15	46.93	56.00	-9.07	QP	
12		4.1980	23.50	10.15	33.65	46.00	-12.35	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: HK + USB Cable: Unirise +Battery: SCUD + Earphone: QUANCHENG


Neutral

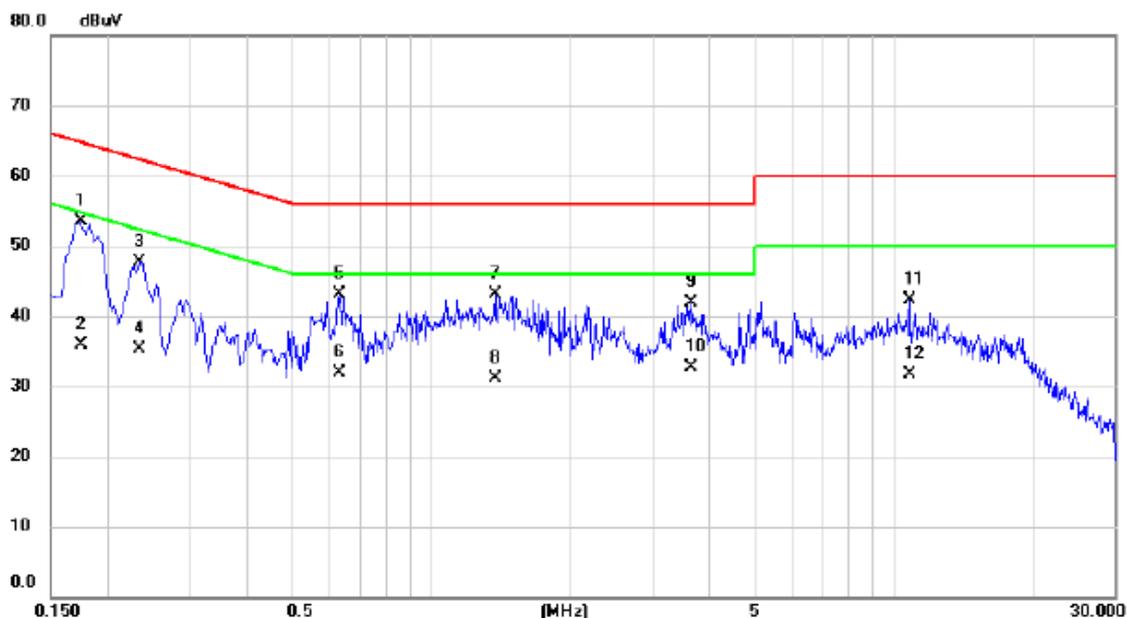

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1740	44.13	9.43	53.56	64.77	-11.21	QP	
2	0.1740	26.50	9.43	35.93	54.77	-18.84	AVG	
3	0.2340	38.22	9.53	47.75	62.31	-14.56	QP	
4	0.2340	25.70	9.53	35.23	52.31	-17.08	AVG	
5	0.6300	33.59	9.44	43.03	56.00	-12.97	QP	
6	0.6300	22.50	9.44	31.94	46.00	-14.06	AVG	
7	1.3700	33.43	9.67	43.10	56.00	-12.90	QP	
8	1.3700	21.40	9.67	31.07	46.00	-14.93	AVG	
9	3.6460	31.96	9.85	41.81	56.00	-14.19	QP	
10	3.6460	22.80	9.85	32.65	46.00	-13.35	AVG	
11	10.7900	31.93	10.32	42.25	60.00	-17.75	QP	
12	10.7900	21.40	10.32	31.72	50.00	-18.28	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: Phitek + USB Cable: Unirise + Battery: SCUD + Earphone: QUANCHENG


Line

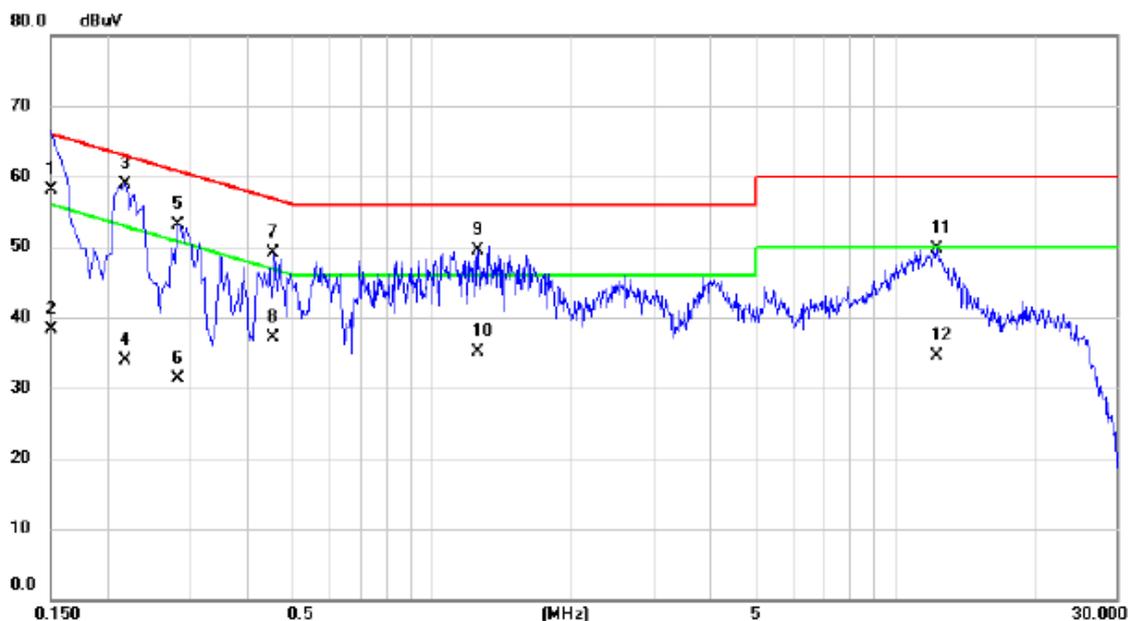

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	48.60	9.52	58.12	66.00	-7.88	QP	
2		0.1500	28.80	9.52	38.32	56.00	-17.68	AVG	
3	*	0.2180	49.39	9.53	58.92	62.89	-3.97	QP	
4		0.2180	24.40	9.53	33.93	52.89	-18.96	AVG	
5		0.2820	43.65	9.53	53.18	60.76	-7.58	QP	
6		0.2820	21.70	9.53	31.23	50.76	-19.53	AVG	
7		0.4540	39.46	9.59	49.05	56.80	-7.75	QP	
8		0.4540	27.60	9.59	37.19	46.80	-9.61	AVG	
9		1.2540	39.68	9.79	49.47	56.00	-6.53	QP	
10		1.2540	25.30	9.79	35.09	46.00	-10.91	AVG	
11		12.3020	39.43	10.28	49.71	60.00	-10.29	QP	
12		12.3020	24.30	10.28	34.58	50.00	-15.42	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: Phitek + USB Cable: Unirise + Battery: SCUD + Earphone: QUANCHENG


Neutral

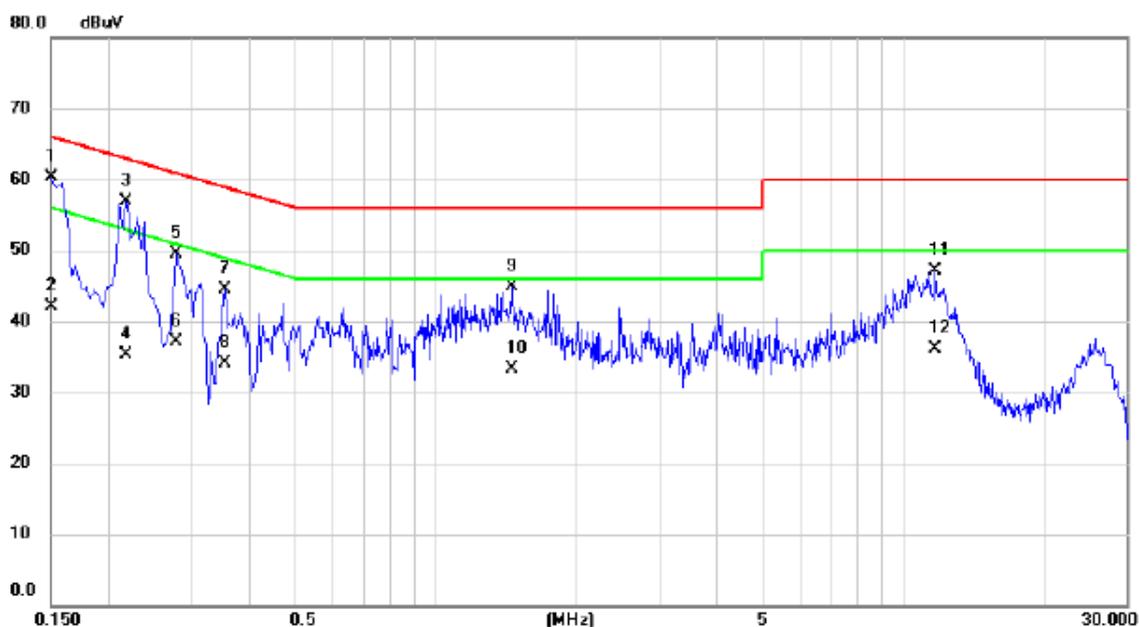

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	50.70	9.52	60.22	66.00	-5.78	QP	
2		0.1500	32.50	9.52	42.02	56.00	-13.98	AVG	
3		0.2180	47.42	9.53	56.95	62.89	-5.94	QP	
4		0.2180	25.70	9.53	35.23	52.89	-17.66	AVG	
5		0.2780	39.90	9.53	49.43	60.88	-11.45	QP	
6		0.2780	27.50	9.53	37.03	50.88	-13.85	AVG	
7		0.3540	35.02	9.53	44.55	58.87	-14.32	QP	
8		0.3540	24.50	9.53	34.03	48.87	-14.84	AVG	
9		1.4500	35.19	9.67	44.86	56.00	-11.14	QP	
10		1.4500	23.60	9.67	33.27	46.00	-12.73	AVG	
11		11.7020	36.82	10.33	47.15	60.00	-12.85	QP	
12		11.7020	25.70	10.33	36.03	50.00	-13.97	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+Playing+Speaker
Note:	Adapter: Phitek + USB Cable: Unirise +Battery: SCUD


Line

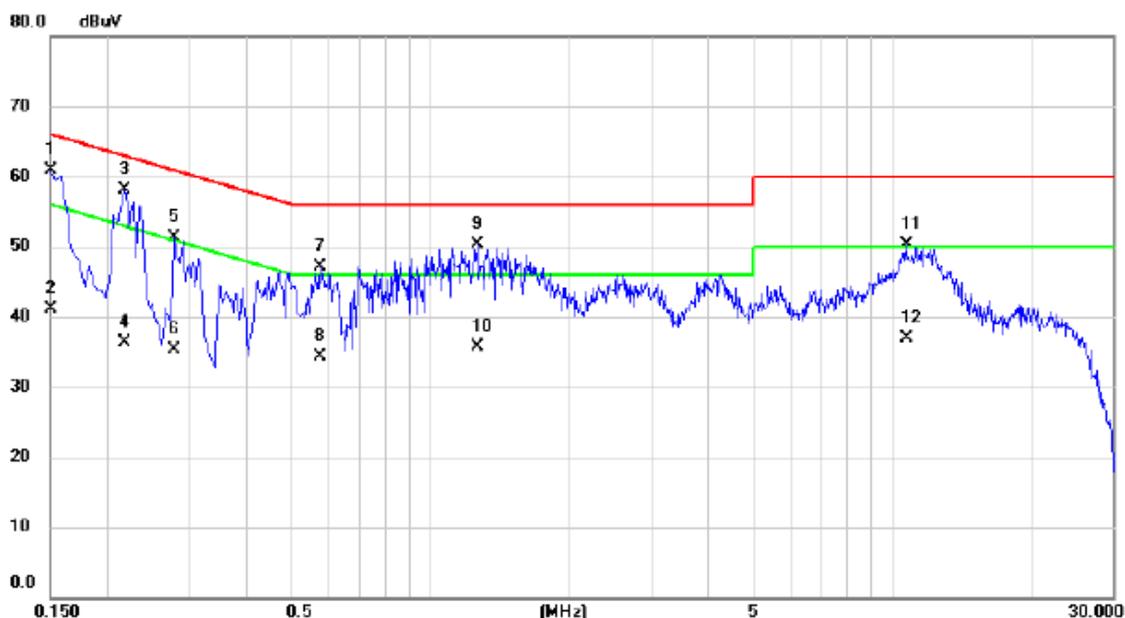

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	51.32	9.52	60.84	66.00	-5.16	QP	
2		0.1500	31.50	9.52	41.02	56.00	-14.98	AVG	
3	*	0.2180	48.55	9.53	58.08	62.89	-4.81	QP	
4		0.2180	26.70	9.53	36.23	52.89	-16.66	AVG	
5		0.2780	41.74	9.53	51.27	60.88	-9.61	QP	
6		0.2780	25.80	9.53	35.33	50.88	-15.55	AVG	
7		0.5780	37.55	9.64	47.19	56.00	-8.81	QP	
8		0.5780	24.70	9.64	34.34	46.00	-11.66	AVG	
9		1.2580	40.46	9.79	50.25	56.00	-5.75	QP	
10		1.2580	25.90	9.79	35.69	46.00	-10.31	AVG	
11		10.7180	40.03	10.23	50.26	60.00	-9.74	QP	
12		10.7180	26.70	10.23	36.93	50.00	-13.07	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+Playing+Speaker
Note:	Adapter: Phitek + USB Cable: Unirise +Battery: SCUD


Neutral

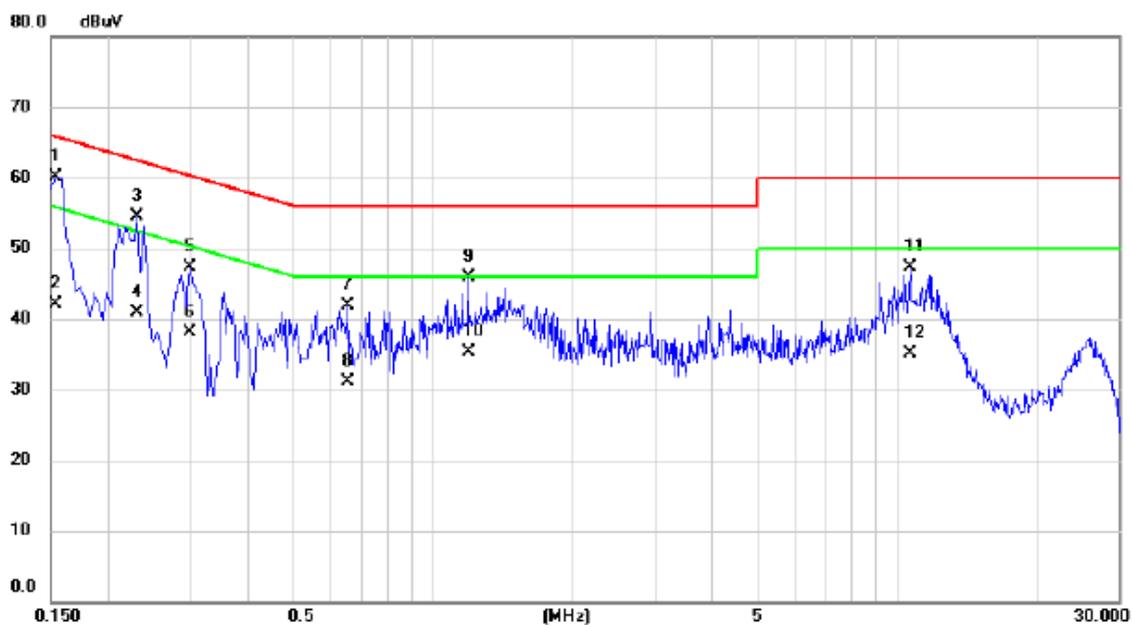

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1540	50.62	9.50	60.12	65.78	-5.66	QP	
2		0.1540	32.70	9.50	42.20	55.78	-13.58	AVG	
3		0.2300	44.95	9.53	54.48	62.45	-7.97	QP	
4		0.2300	31.40	9.53	40.93	52.45	-11.52	AVG	
5		0.2980	37.77	9.53	47.30	60.30	-13.00	QP	
6		0.2980	28.50	9.53	38.03	50.30	-12.27	AVG	
7		0.6540	32.49	9.45	41.94	56.00	-14.06	QP	
8		0.6540	21.60	9.45	31.05	46.00	-14.95	AVG	
9		1.1900	36.27	9.67	45.94	56.00	-10.06	QP	
10		1.1900	25.70	9.67	35.37	46.00	-10.63	AVG	
11		10.6580	36.98	10.32	47.30	60.00	-12.70	QP	
12		10.6580	24.70	10.32	35.02	50.00	-14.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (GSM)+ Earphone
Note:	Adapter: Phitek + USB Cable: Unirise +Battery: SCUD + Earphone: QUANCHENG


Line

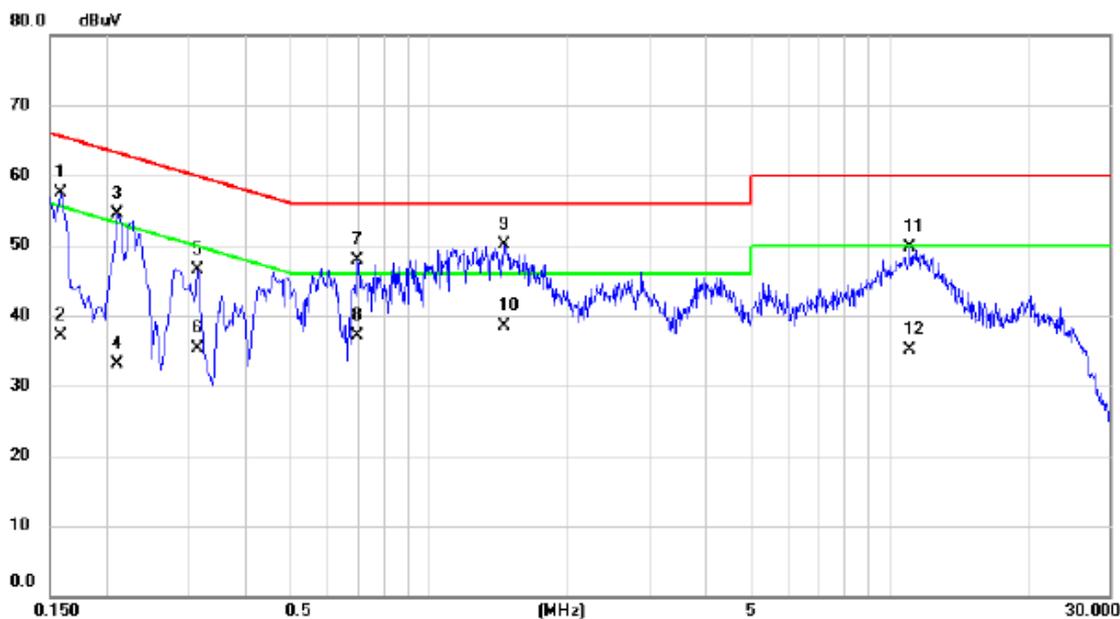

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1580	48.05	9.52	57.57	65.57	-8.00	QP	
2		0.1580	27.50	9.52	37.02	55.57	-18.55	AVG	
3		0.2100	44.97	9.53	54.50	63.21	-8.71	QP	
4		0.2100	23.60	9.53	33.13	53.21	-20.08	AVG	
5		0.3140	36.90	9.53	46.43	59.86	-13.43	QP	
6		0.3140	25.70	9.53	35.23	49.86	-14.63	AVG	
7		0.6980	38.29	9.65	47.94	56.00	-8.06	QP	
8		0.6980	27.40	9.65	37.05	46.00	-8.95	AVG	
9	*	1.4500	40.29	9.85	50.14	56.00	-5.86	QP	
10		1.4500	28.60	9.85	38.45	46.00	-7.55	AVG	
11		11.0420	39.39	10.24	49.63	60.00	-10.37	QP	
12		11.0420	24.90	10.24	35.14	50.00	-14.86	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (GSM)+ Earphone
Note:	Adapter: Phitek + USB Cable: Unirise +Battery: SCUD + Earphone: QUANCHENG


Neutral

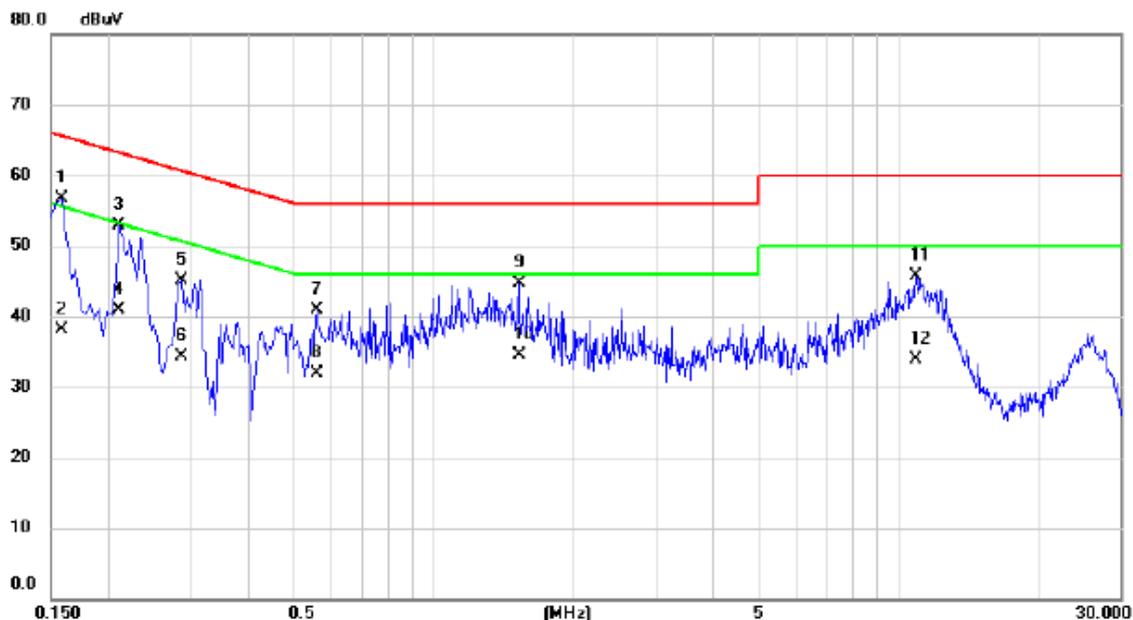

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1580	47.25	9.48	56.73	65.57	-8.84	QP	
2		0.1580	28.60	9.48	38.08	55.57	-17.49	AVG	
3		0.2100	43.43	9.53	52.96	63.21	-10.25	QP	
4		0.2100	31.40	9.53	40.93	53.21	-12.28	AVG	
5		0.2860	35.53	9.53	45.06	60.64	-15.58	QP	
6		0.2860	24.70	9.53	34.23	50.64	-16.41	AVG	
7		0.5620	31.43	9.44	40.87	56.00	-15.13	QP	
8		0.5620	22.50	9.44	31.94	46.00	-14.06	AVG	
9		1.5220	35.01	9.68	44.69	56.00	-11.31	QP	
10		1.5220	24.90	9.68	34.58	46.00	-11.42	AVG	
11		10.8900	35.30	10.32	45.62	60.00	-14.38	QP	
12		10.8900	23.50	10.32	33.82	50.00	-16.18	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: Phitek + USB Cable: Unirise +Battery: SCUD


Line

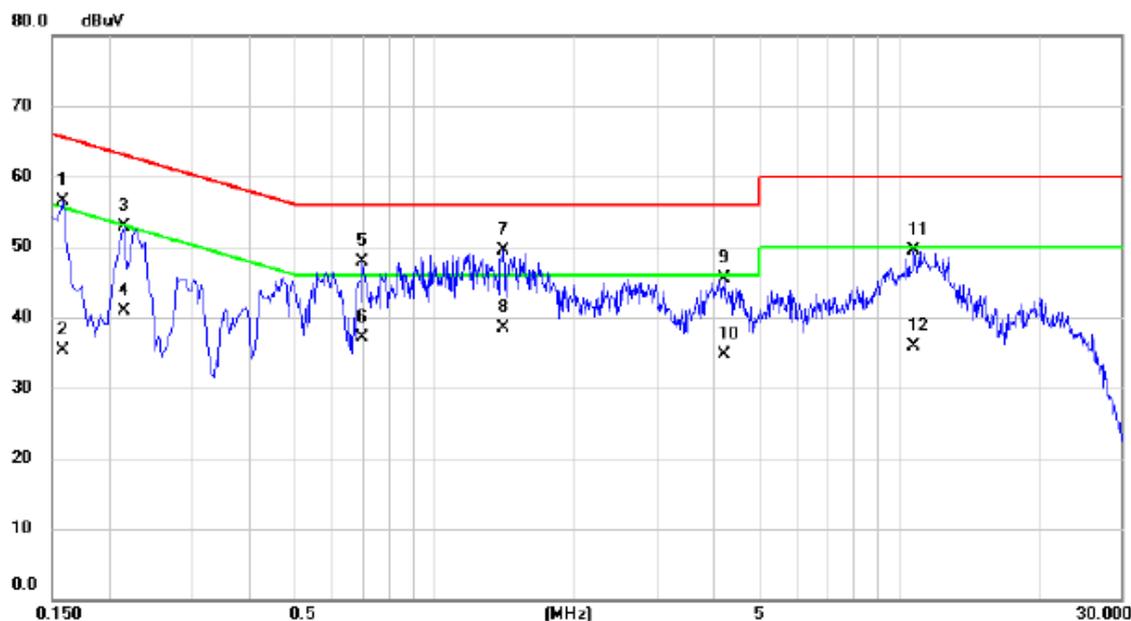

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1580	46.98	9.52	56.50	65.57	-9.07	QP	
2	0.1580	25.70	9.52	35.22	55.57	-20.35	AVG	
3	0.2140	43.29	9.53	52.82	63.05	-10.23	QP	
4	0.2140	31.40	9.53	40.93	53.05	-12.12	AVG	
5	0.6980	38.21	9.65	47.86	56.00	-8.14	QP	
6	0.6980	27.50	9.65	37.15	46.00	-8.85	AVG	
7 *	1.4020	39.58	9.84	49.42	56.00	-6.58	QP	
8	1.4020	28.60	9.84	38.44	46.00	-7.56	AVG	
9	4.2020	35.30	10.15	45.45	56.00	-10.55	QP	
10	4.2020	24.50	10.15	34.65	46.00	-11.35	AVG	
11	10.7700	39.23	10.24	49.47	60.00	-10.53	QP	
12	10.7700	25.60	10.24	35.84	50.00	-14.16	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: Phitek + USB Cable: Unirise +Battery: SCUD


Neutral

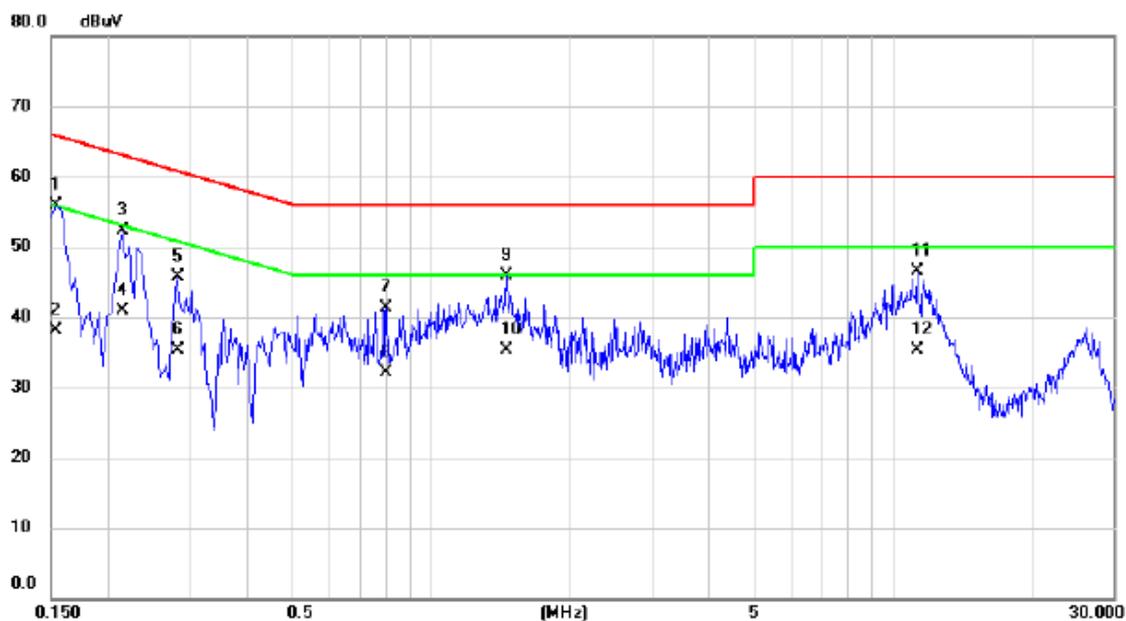

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1540	46.41	9.50	55.91	65.78	-9.87	QP	
2		0.1540	28.60	9.50	38.10	55.78	-17.68	AVG	
3		0.2140	42.79	9.53	52.32	63.05	-10.73	QP	
4		0.2140	31.40	9.53	40.93	53.05	-12.12	AVG	
5		0.2820	36.14	9.53	45.67	60.76	-15.09	QP	
6		0.2820	25.70	9.53	35.23	50.76	-15.53	AVG	
7		0.7980	31.79	9.55	41.34	56.00	-14.66	QP	
8		0.7980	22.50	9.55	32.05	46.00	-13.95	AVG	
9		1.4540	36.24	9.67	45.91	56.00	-10.09	QP	
10		1.4540	25.70	9.67	35.37	46.00	-10.63	AVG	
11		11.3060	36.24	10.32	46.56	60.00	-13.44	QP	
12		11.3060	24.90	10.32	35.22	50.00	-14.78	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (LTE)
Note:	Adapter: Phitek + USB Cable: Unirise +Battery: SCUD


Line

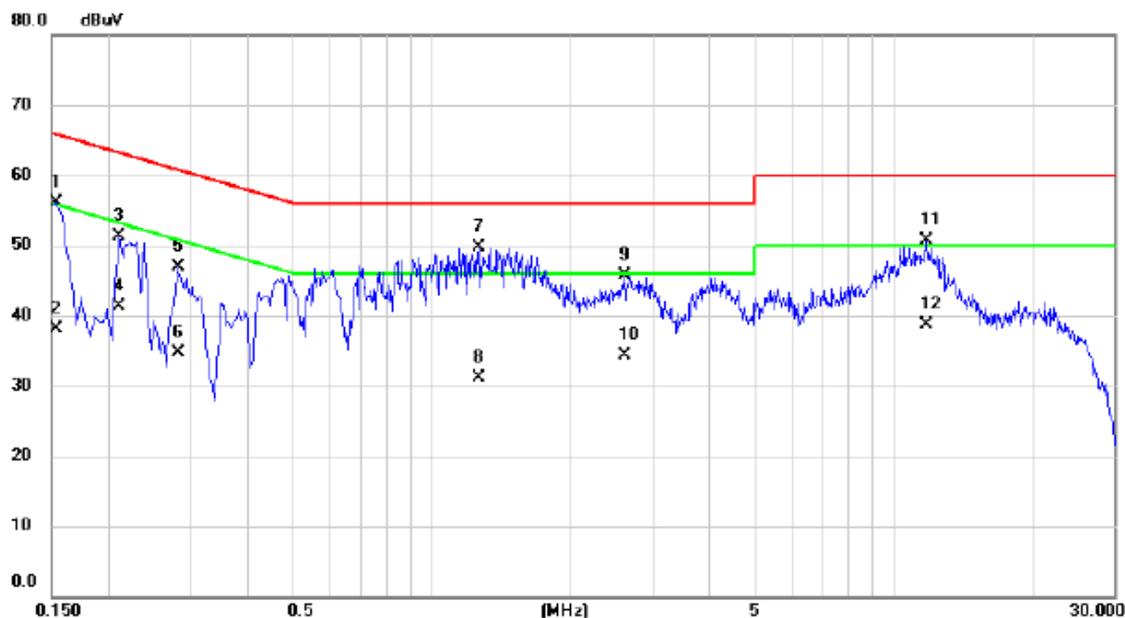

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1540	46.63	9.52	56.15	65.78	-9.63	QP	
2	0.1540	28.60	9.52	38.12	55.78	-17.66	AVG	
3	0.2100	41.71	9.53	51.24	63.21	-11.97	QP	
4	0.2100	31.70	9.53	41.23	53.21	-11.98	AVG	
5	0.2820	37.39	9.53	46.92	60.76	-13.84	QP	
6	0.2820	25.10	9.53	34.63	50.76	-16.13	AVG	
7 *	1.2580	39.84	9.79	49.63	56.00	-6.37	QP	
8	1.2580	21.40	9.79	31.19	46.00	-14.81	AVG	
9	2.6140	35.58	10.09	45.67	56.00	-10.33	QP	
10	2.6140	24.30	10.09	34.39	46.00	-11.61	AVG	
11	11.7300	40.43	10.26	50.69	60.00	-9.31	QP	
12	11.7300	28.40	10.26	38.66	50.00	-11.34	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (LTE)
Note:	Adapter: Phitek + USB Cable: Unirise +Battery: SCUD

Neutral

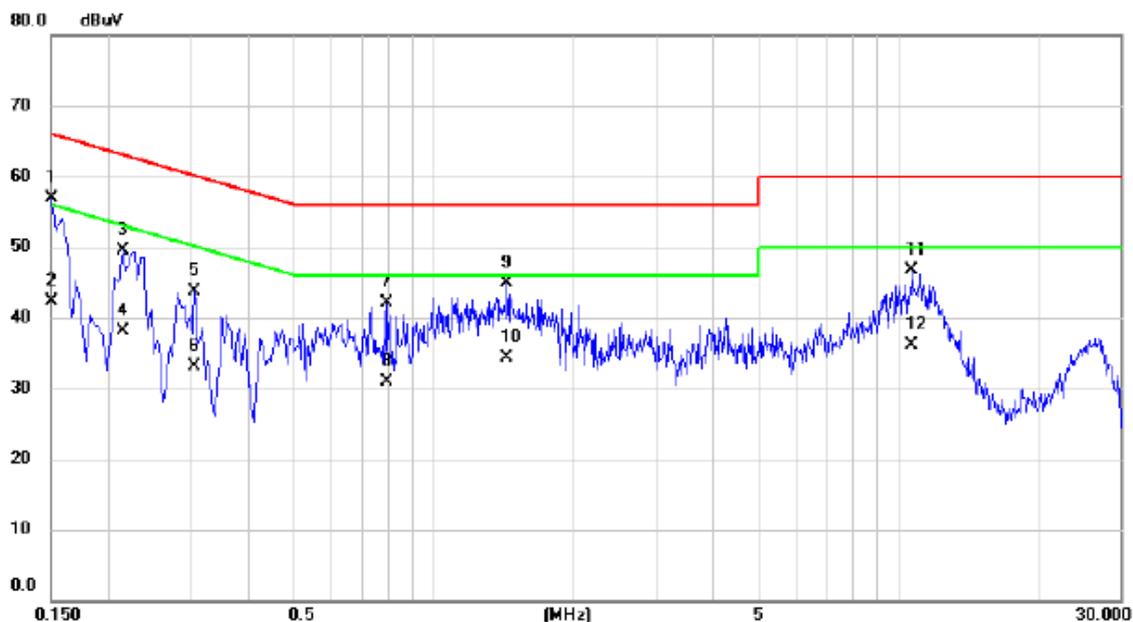


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	47.40	9.52	56.92	66.00	-9.08	QP	
2		0.1500	32.70	9.52	42.22	56.00	-13.78	AVG	
3		0.2140	40.05	9.53	49.58	63.05	-13.47	QP	
4		0.2140	28.60	9.53	38.13	53.05	-14.92	AVG	
5		0.3060	34.16	9.53	43.69	60.08	-16.39	QP	
6		0.3060	23.50	9.53	33.03	50.08	-17.05	AVG	
7		0.7940	32.47	9.54	42.01	56.00	-13.99	QP	
8		0.7940	21.40	9.54	30.94	46.00	-15.06	AVG	
9		1.4380	35.16	9.67	44.83	56.00	-11.17	QP	
10		1.4380	24.60	9.67	34.27	46.00	-11.73	AVG	
11		10.6780	36.39	10.32	46.71	60.00	-13.29	QP	
12		10.6780	25.70	10.32	36.02	50.00	-13.98	AVG	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Unirise +Battery: SCUD+ Earphone: QUANCHENG


Vertical

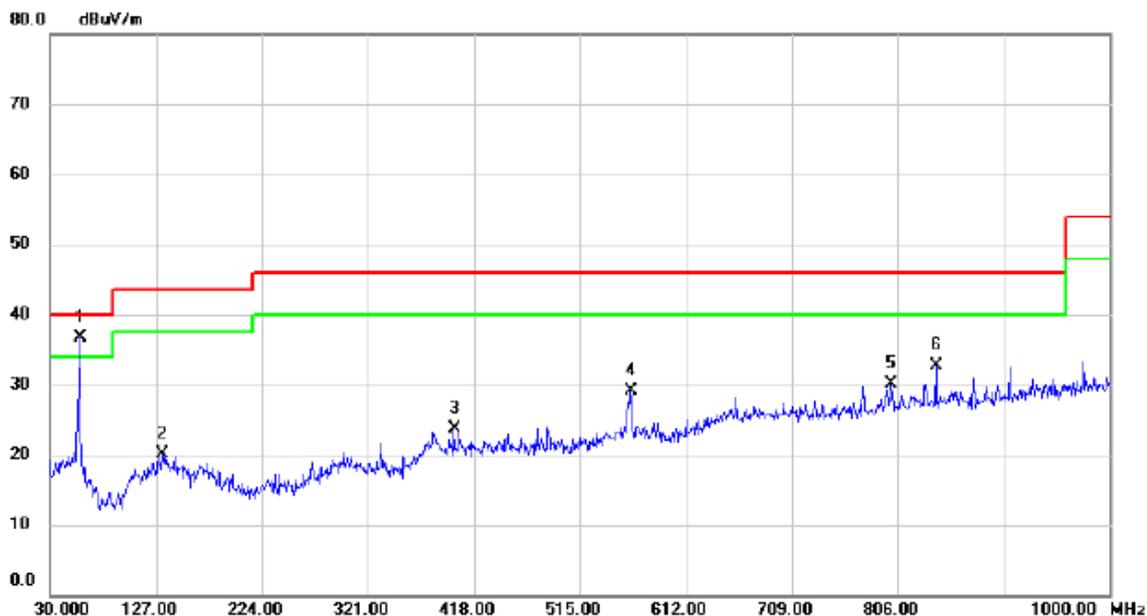

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.1600	51.25	-14.52	36.73	40.00	-3.27	QP	
2		133.3050	33.92	-13.83	20.09	43.50	-23.41	QP	
3		400.0550	33.21	-9.57	23.64	46.00	-22.36	QP	
4		562.0450	36.01	-6.96	29.05	46.00	-16.95	QP	
5		799.6950	32.42	-2.34	30.08	46.00	-15.92	QP	
6		841.4050	34.61	-1.88	32.73	46.00	-13.27	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Unirise +Battery: SCUD+ Earphone: QUANCHENG


Horizontal

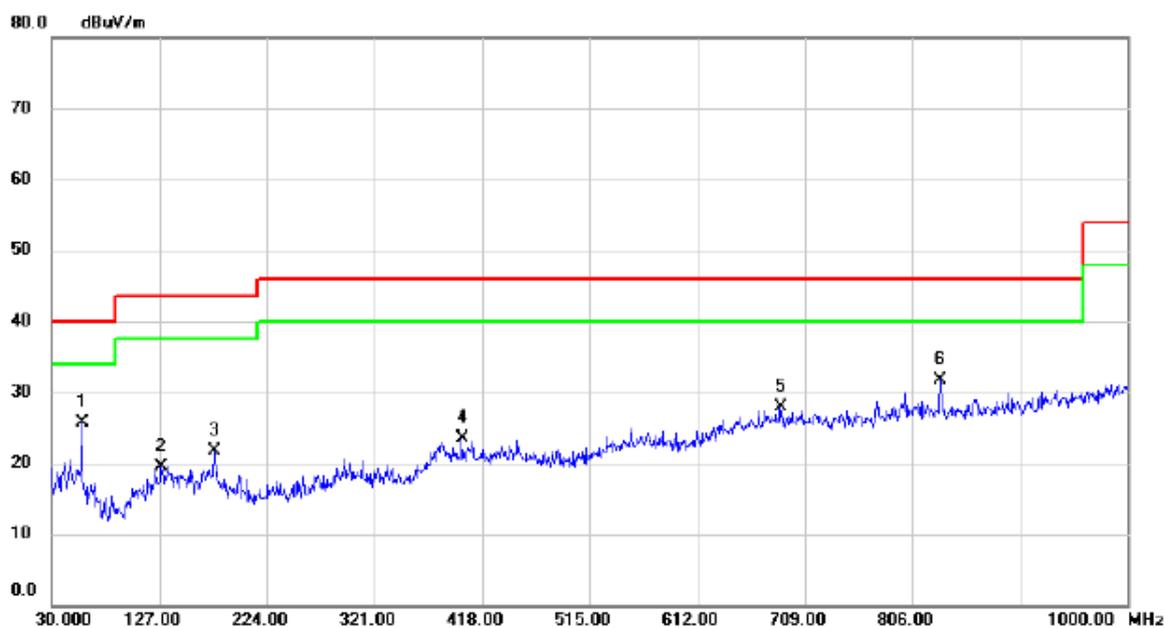

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.6450	40.35	-14.58	25.77	40.00	-14.23	QP	
2		128.4550	33.92	-14.40	19.52	43.50	-23.98	QP	
3		176.9550	35.99	-14.27	21.72	43.50	-21.78	QP	
4		400.0550	32.99	-9.57	23.42	46.00	-22.58	QP	
5		687.1750	32.36	-4.52	27.84	46.00	-18.16	QP	
6		831.2200	33.65	-2.01	31.64	46.00	-14.36	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: PANG NGAI +Battery: DESAY + Earphone: Lianchuang

Vertical

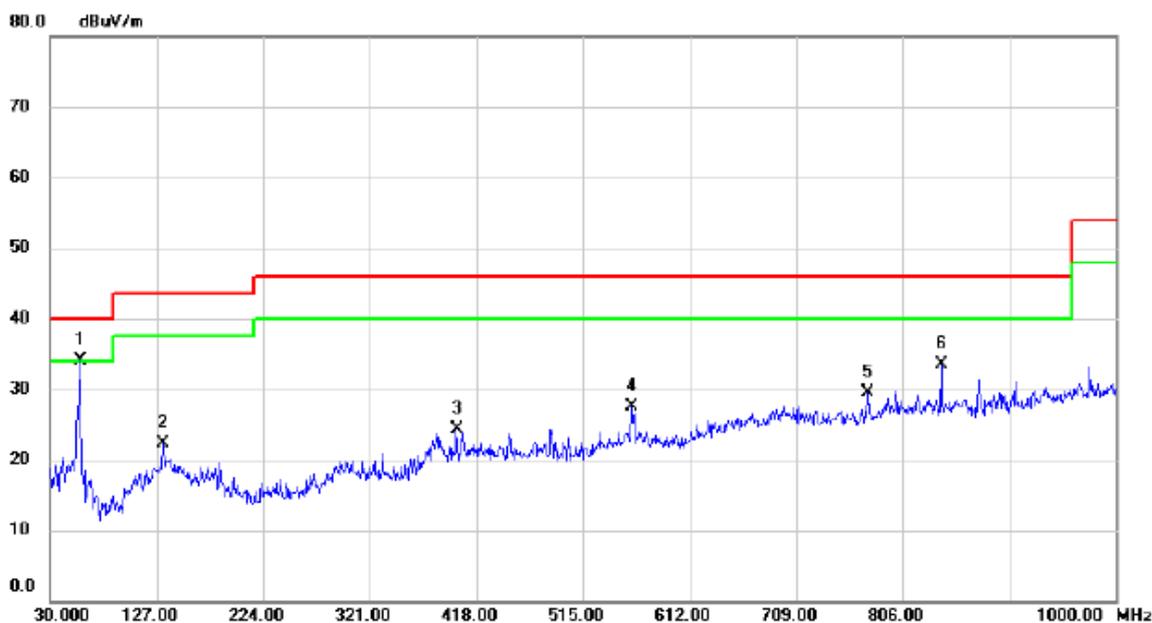

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.6450	48.67	-14.58	34.09	40.00	-5.91	QP	
2		132.8200	36.25	-13.89	22.36	43.50	-21.14	QP	
3		400.0550	33.85	-9.57	24.28	46.00	-21.72	QP	
4		560.1050	34.57	-7.00	27.57	46.00	-18.43	QP	
5		773.9900	32.32	-2.75	29.57	46.00	-16.43	QP	
6		841.4050	35.32	-1.88	33.44	46.00	-12.56	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: PANG NGAI +Battery: DESAY + Earphone: Lianchuang


Horizontal



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		56.6750	37.19	-14.48	22.71	40.00	-17.29	QP	
2		124.5750	34.61	-14.97	19.64	43.50	-23.86	QP	
3		176.9550	35.40	-14.27	21.13	43.50	-22.37	QP	
4		400.0550	34.09	-9.57	24.52	46.00	-21.48	QP	
5		567.3800	32.60	-6.86	25.74	46.00	-20.26	QP	
6	*	890.3900	31.24	-0.46	30.78	46.00	-15.22	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: CONNREX +Battery: Sunwoda + Earphone: GoerTek / HA1-3


Vertical

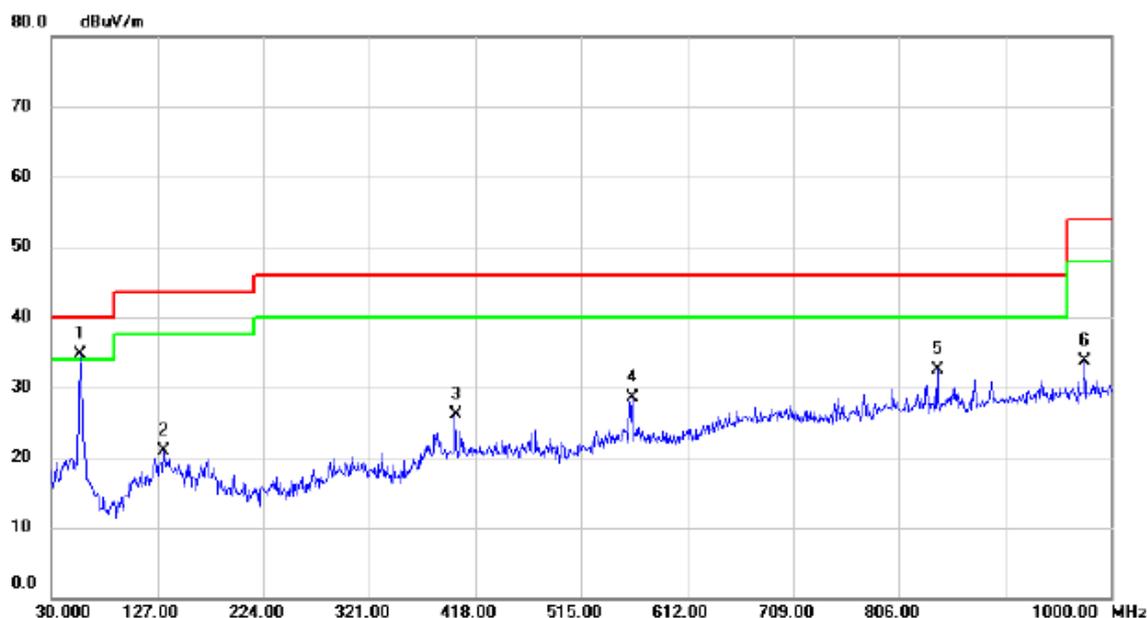

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.6750	49.11	-14.48	34.63	40.00	-5.37	QP	
2		133.3050	34.76	-13.83	20.93	43.50	-22.57	QP	
3		400.0550	35.70	-9.57	26.13	46.00	-19.87	QP	
4		562.5300	35.38	-6.95	28.43	46.00	-17.57	QP	
5		841.4050	34.33	-1.88	32.45	46.00	-13.55	QP	
6		976.2350	32.69	0.97	33.66	54.00	-20.34	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: CONNREX +Battery: Sunwoda + Earphone: GoerTek / HA1-3


Horizontal

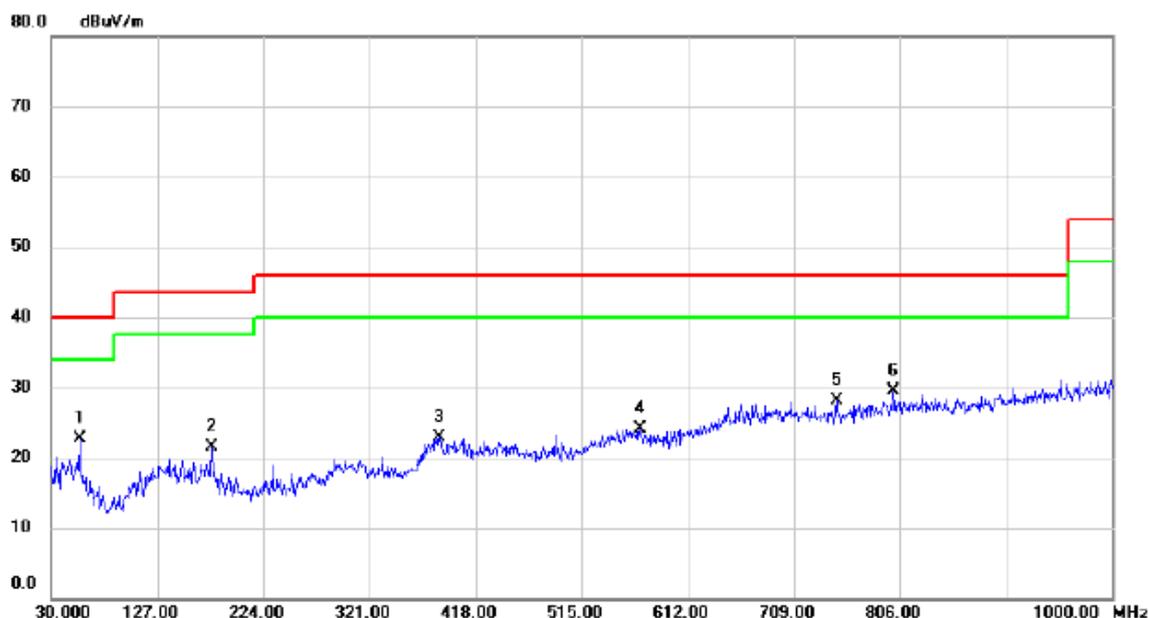

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		56.6750	37.18	-14.48	22.70	40.00	-17.30	QP	
2		176.9550	35.74	-14.27	21.47	43.50	-22.03	QP	
3		385.5050	32.84	-9.95	22.89	46.00	-23.11	QP	
4		568.3500	30.99	-6.84	24.15	46.00	-21.85	QP	
5		747.8000	31.27	-3.17	28.10	46.00	-17.90	QP	
6	*	800.1800	31.81	-2.34	29.47	46.00	-16.53	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Luxshare +Battery: DESAY + Earphone: GoerTek / HG-04A


Vertical

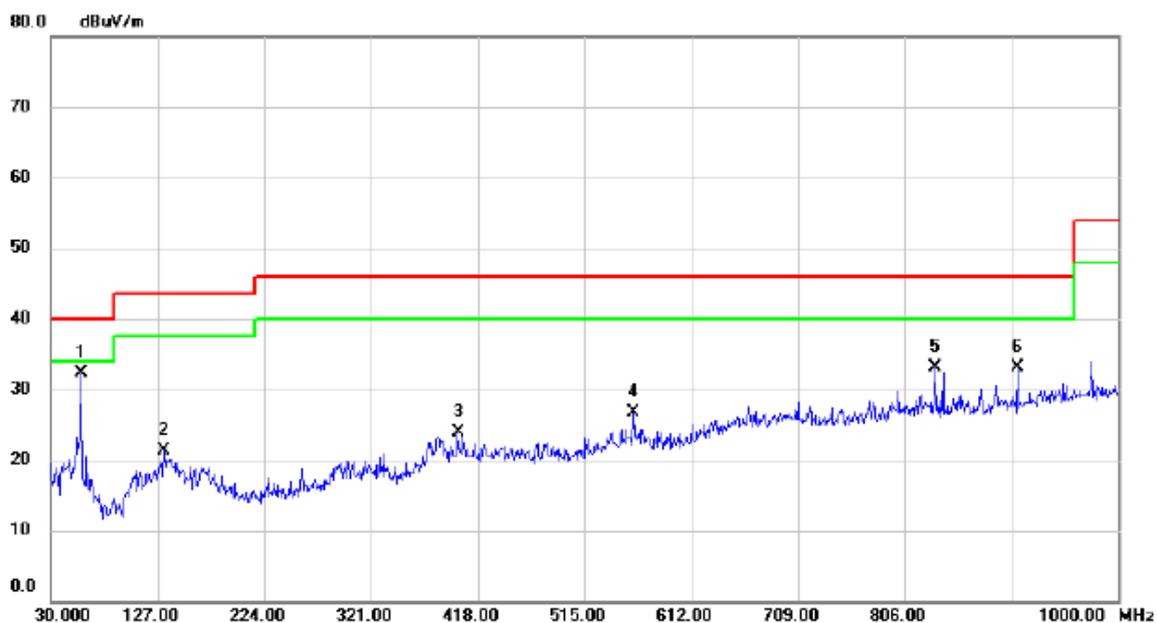

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.6450	46.96	-14.58	32.38	40.00	-7.62	QP	
2		132.8200	35.16	-13.89	21.27	43.50	-22.23	QP	
3		400.0550	33.51	-9.57	23.94	46.00	-22.06	QP	
4		560.1050	33.71	-7.00	26.71	46.00	-19.29	QP	
5		833.1600	35.12	-1.98	33.14	46.00	-12.86	QP	
6		908.8200	33.05	0.02	33.07	46.00	-12.93	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Luxshare +Battery: DESAY + Earphone: GoerTek / HG-04A


Horizontal

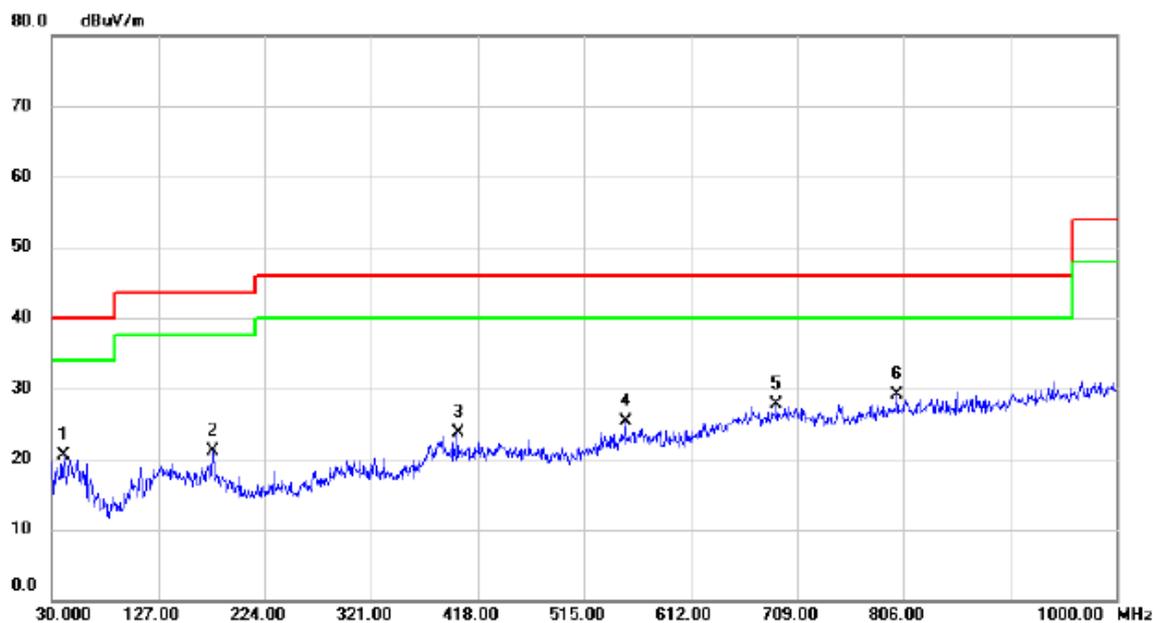

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	40.6700	34.12	-13.66	20.46	40.00	-19.54	QP	
2	176.9550	35.40	-14.27	21.13	43.50	-22.37	QP	
3	400.0550	33.23	-9.57	23.66	46.00	-22.34	QP	
4	552.8300	32.44	-7.12	25.32	46.00	-20.68	QP	
5	690.5700	32.24	-4.46	27.78	46.00	-18.22	QP	
6 *	800.1800	31.42	-2.34	29.08	46.00	-16.92	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: FOXCONN +Battery: Sunwoda + Earphone: MERRY


Vertical

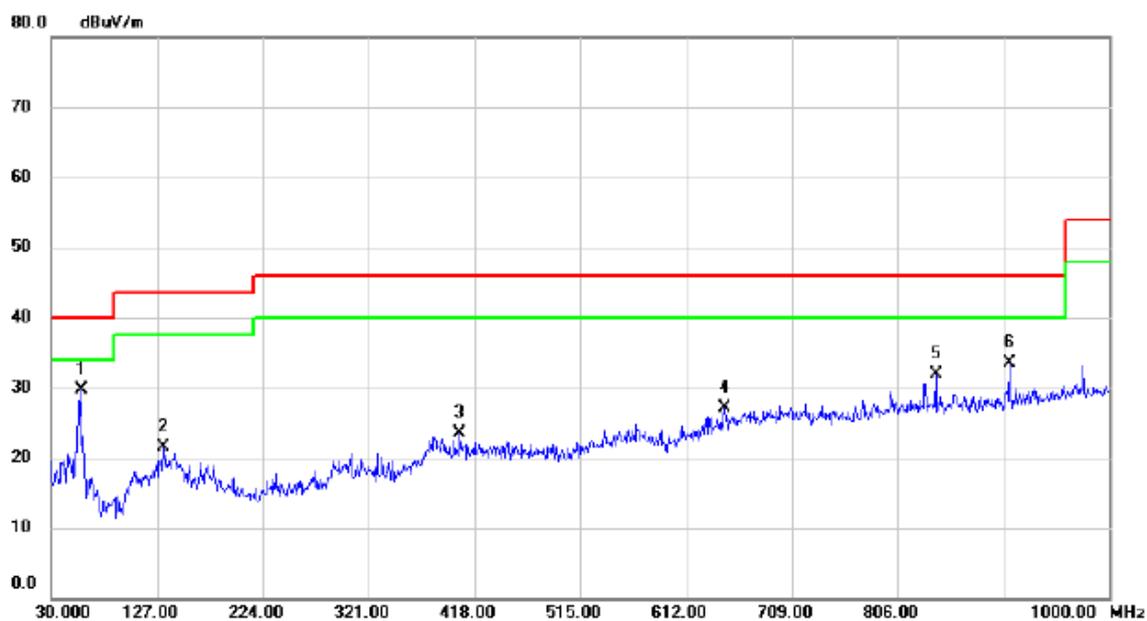

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.6450	44.19	-14.58	29.61	40.00	-10.39	QP	
2		132.8200	35.39	-13.89	21.50	43.50	-22.00	QP	
3		404.9050	32.98	-9.51	23.47	46.00	-22.53	QP	
4		647.8900	32.38	-5.19	27.19	46.00	-18.81	QP	
5		841.4050	33.77	-1.88	31.89	46.00	-14.11	QP	
6		908.8200	33.46	0.02	33.48	46.00	-12.52	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: FOXCONN +Battery: Sunwoda + Earphone: MERRY


Horizontal

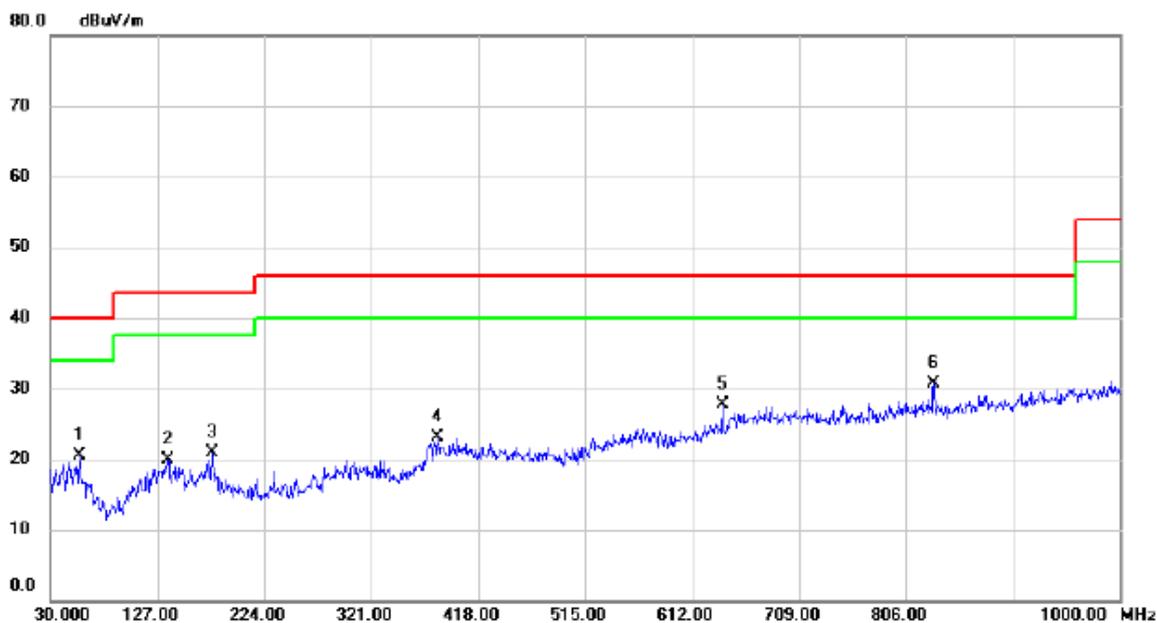

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		56.1900	34.89	-14.41	20.48	40.00	-19.52	QP	
2		137.1850	33.31	-13.44	19.87	43.50	-23.63	QP	
3		176.9550	35.16	-14.27	20.89	43.50	-22.61	QP	
4		381.6250	33.22	-10.06	23.16	46.00	-22.84	QP	
5		639.6450	33.05	-5.38	27.67	46.00	-18.33	QP	
6	*	831.7050	32.66	-1.99	30.67	46.00	-15.33	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: Phitek +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Vertical

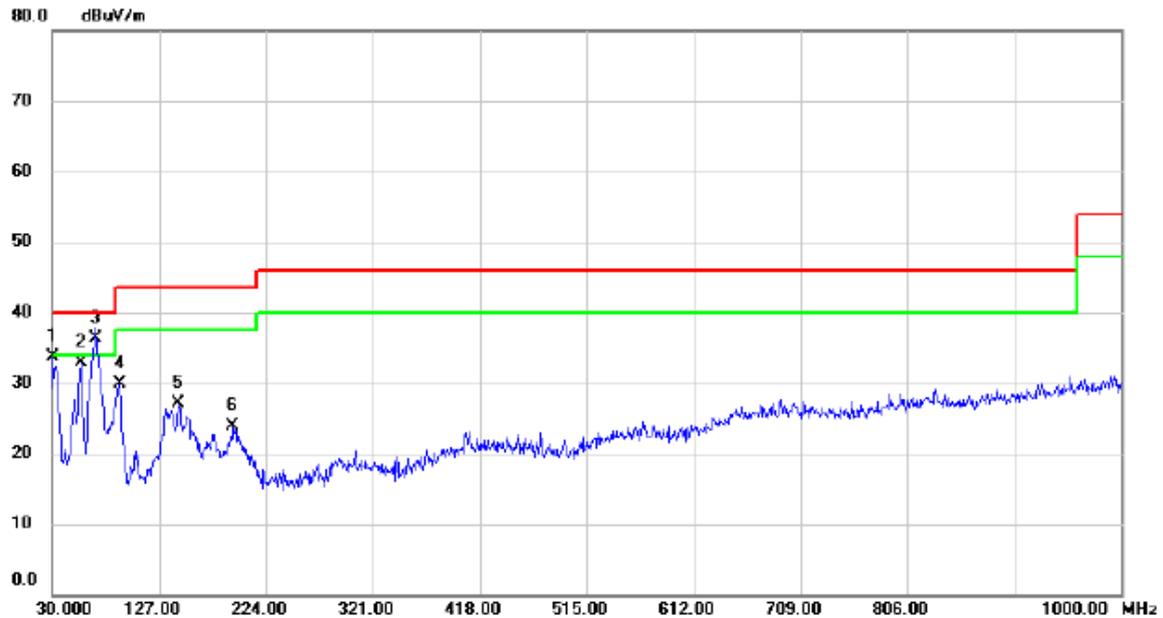

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	48.43	-14.66	33.77	40.00	-6.23	QP	
2		56.1900	47.34	-14.41	32.93	40.00	-7.07	QP	
3	*	69.7700	52.34	-16.13	36.21	40.00	-3.79	QP	
4		91.1100	48.38	-18.40	29.98	43.50	-13.52	QP	
5		144.9450	40.01	-12.98	27.03	43.50	-16.47	QP	
6		193.9300	38.63	-14.80	23.83	43.50	-19.67	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: Phitek +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG

Horizontal

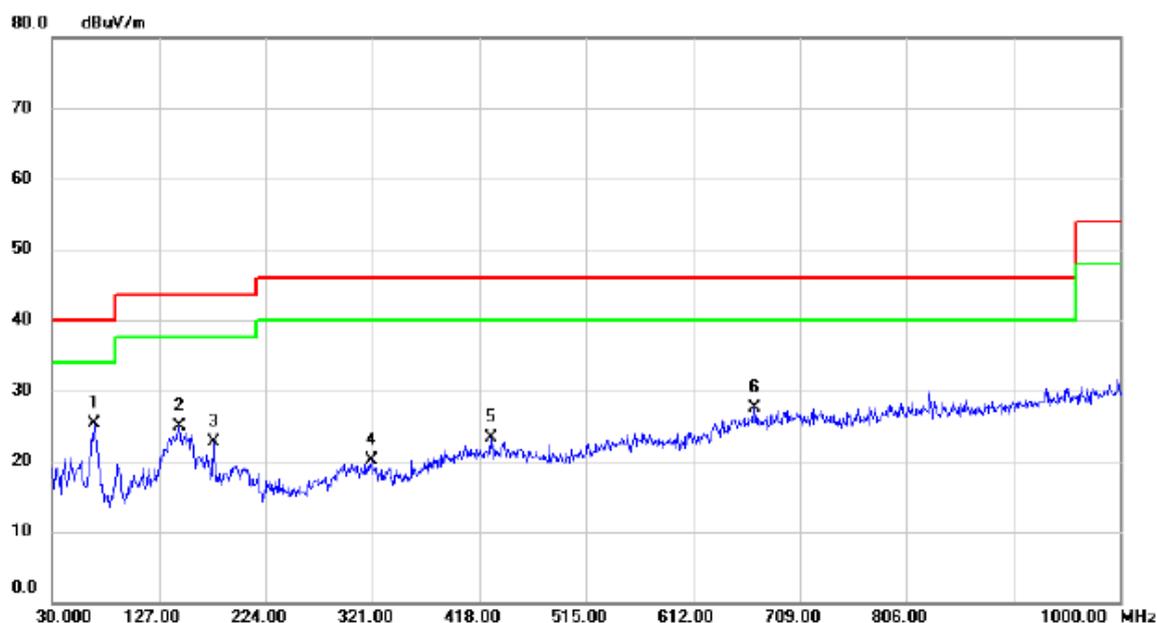

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	68.3150	41.18	-15.94	25.24	40.00	-14.76	QP	
2		145.4300	37.79	-12.96	24.83	43.50	-18.67	QP	
3		176.9550	36.89	-14.27	22.62	43.50	-20.88	QP	
4		320.5150	31.65	-11.47	20.18	46.00	-25.82	QP	
5		429.1550	32.55	-9.22	23.33	46.00	-22.67	QP	
6		668.2600	32.40	-4.84	27.56	46.00	-18.44	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: BYD +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	30.0000	48.85	-14.66	34.19	40.00	-5.81	QP	
2		54.7350	46.23	-14.24	31.99	40.00	-8.01	QP	
3	*	66.3750	53.30	-15.68	37.62	40.00	-2.38	QP	
4		151.7350	43.65	-12.90	30.75	43.50	-12.75	QP	
5		207.0250	40.55	-14.52	26.03	43.50	-17.47	QP	
6		719.1850	31.32	-3.85	27.47	46.00	-18.53	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: BYD +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	68.3150	44.66	-15.94	28.72	40.00	-11.28	QP	
2		156.5850	39.26	-13.25	26.01	43.50	-17.49	QP	
3		230.3050	38.20	-14.04	24.16	46.00	-21.84	QP	
4		310.8150	34.40	-11.65	22.75	46.00	-23.25	QP	
5		428.1850	32.38	-9.24	23.14	46.00	-22.86	QP	
6		703.6650	32.28	-4.21	28.07	46.00	-17.93	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: HK +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	32.4250	51.10	-14.35	36.75	40.00	-3.25	QP	
2		54.2500	44.00	-14.18	29.82	40.00	-10.18	QP	
3		69.7700	45.77	-16.13	29.64	40.00	-10.36	QP	
4		88.2000	53.81	-18.42	35.39	43.50	-8.11	QP	
5		133.3050	44.55	-13.83	30.72	43.50	-12.78	QP	
6		152.2200	43.86	-12.94	30.92	43.50	-12.58	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: HK +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Horizontal

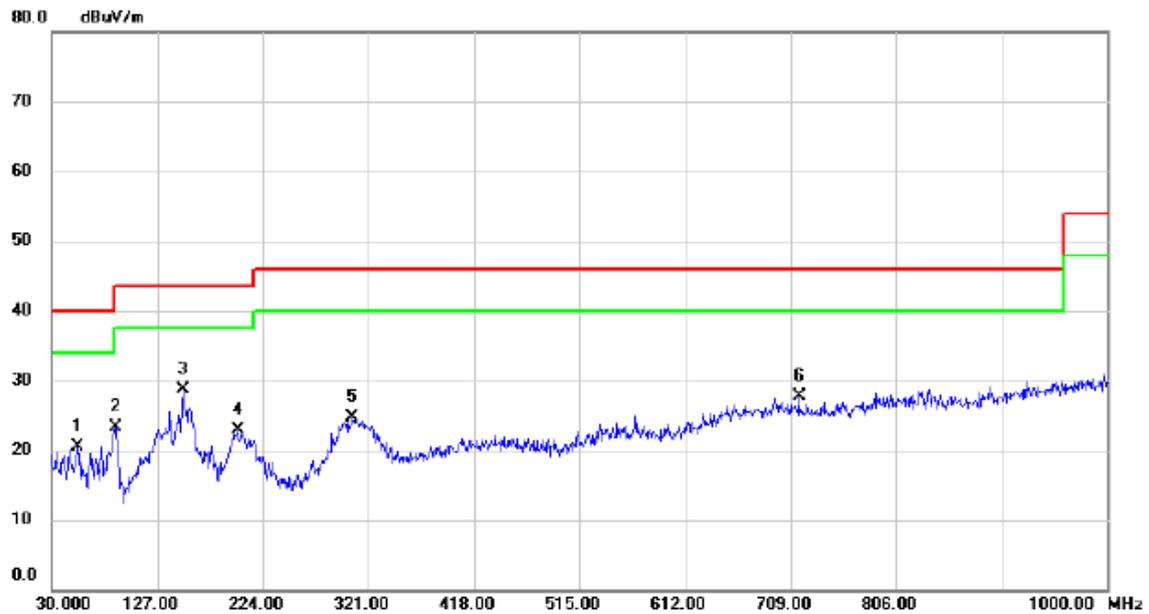

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	54.2500	34.59	-14.18	20.41	40.00	-19.59	QP	
2	88.2000	41.79	-18.42	23.37	43.50	-20.13	QP	
3 *	150.7650	41.63	-12.84	28.79	43.50	-14.71	QP	
4	200.7200	38.26	-15.44	22.82	43.50	-20.68	QP	
5	305.9650	36.39	-11.74	24.65	46.00	-21.35	QP	
6	717.2450	31.61	-3.91	27.70	46.00	-18.30	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+Playing+Speaker
Note:	Adapter: BYD + USB Cable: Luxshare +Battery: SCUD


Vertical

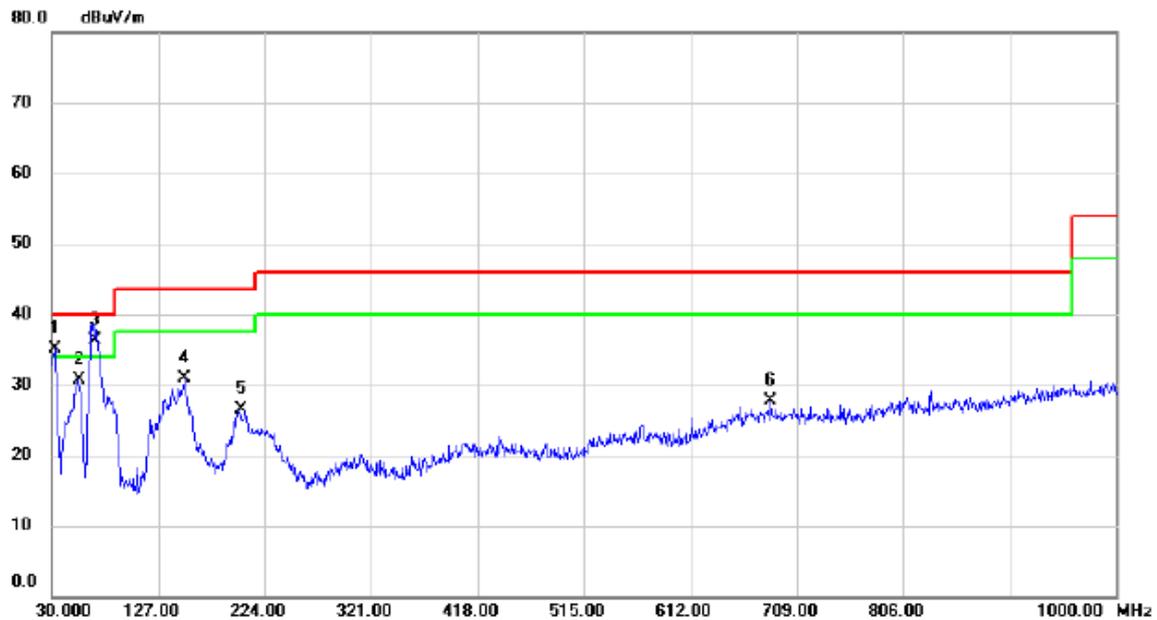

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	32.9100	49.33	-14.29	35.04	40.00	-4.96	QP	
2		54.7350	44.90	-14.24	30.66	40.00	-9.34	QP	
3	*	69.2850	52.34	-16.07	36.27	40.00	-3.73	QP	
4		151.2500	43.79	-12.86	30.93	43.50	-12.57	QP	
5		202.1750	41.75	-15.23	26.52	43.50	-16.98	QP	
6		685.2350	32.32	-4.55	27.77	46.00	-18.23	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+Playing+Speaker
Note:	Adapter: BYD + USB Cable: Luxshare +Battery: SCUD


Horizontal

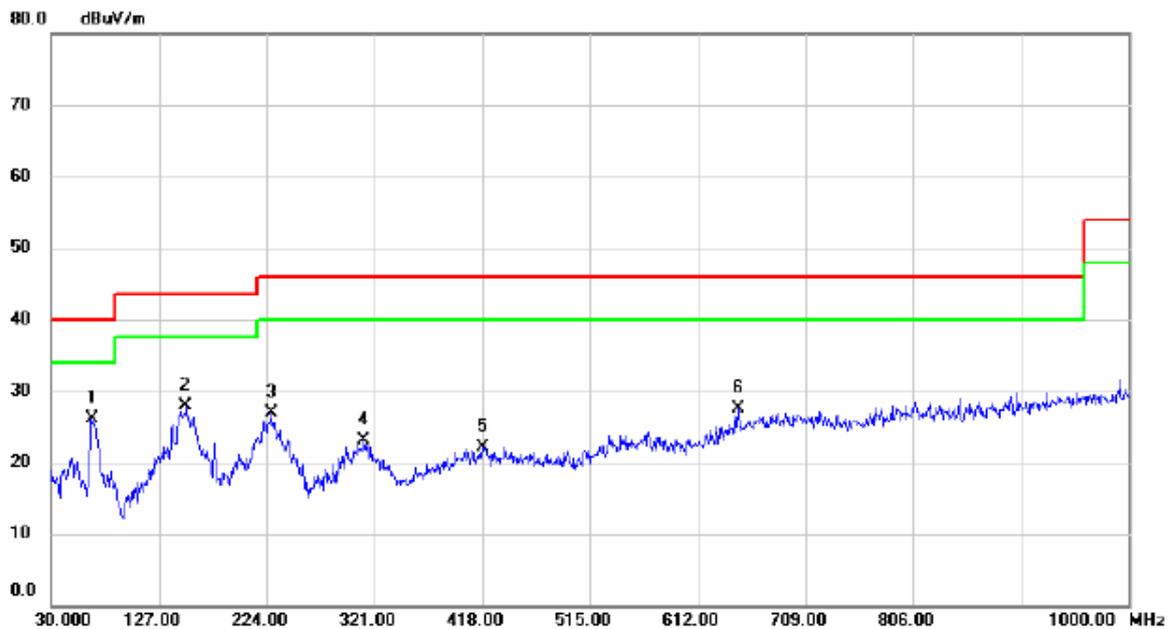

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	66.3750	41.84	-15.68	26.16	40.00	-13.84	QP	
2		151.2500	40.70	-12.86	27.84	43.50	-15.66	QP	
3		228.3650	41.07	-14.17	26.90	46.00	-19.10	QP	
4		311.7850	34.76	-11.64	23.12	46.00	-22.88	QP	
5		418.4850	31.54	-9.35	22.19	46.00	-23.81	QP	
6		648.8600	32.75	-5.17	27.58	46.00	-18.42	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (GSM)+ Earphone
Note:	Adapter: BYD + USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG

Vertical

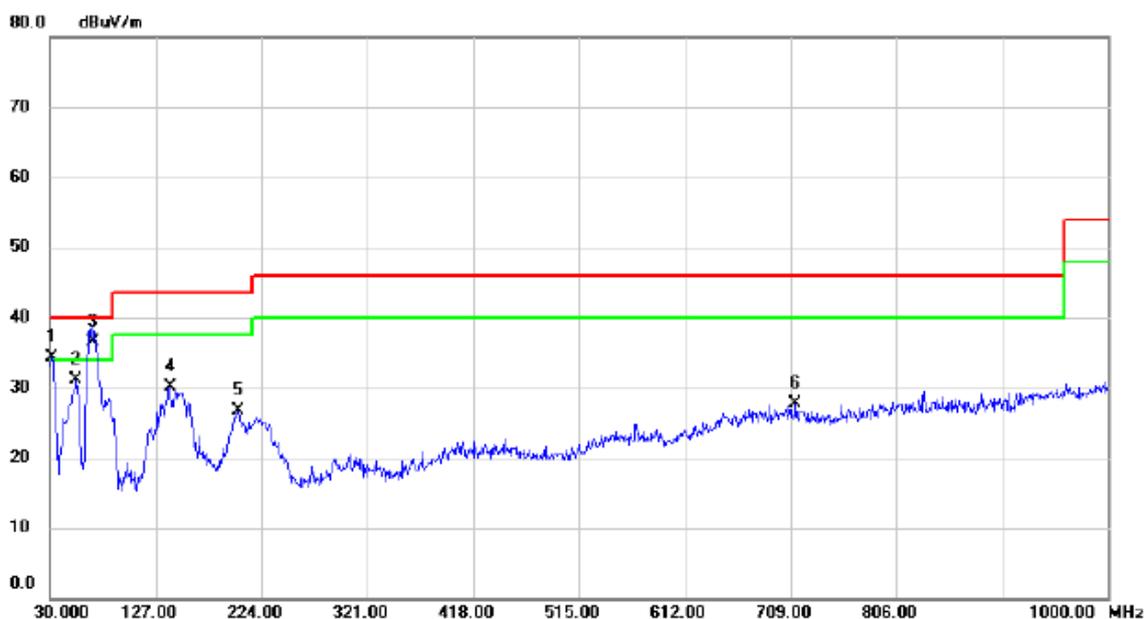

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	32.4250	48.66	-14.35	34.31	40.00	-5.69	QP	
2		54.2500	45.20	-14.18	31.02	40.00	-8.98	QP	
3	*	69.2850	52.50	-16.07	36.43	40.00	-3.57	QP	
4		140.0950	43.35	-13.17	30.18	43.50	-13.32	QP	
5		202.6600	41.89	-15.15	26.74	43.50	-16.76	QP	
6		713.8500	31.77	-3.98	27.79	46.00	-18.21	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (GSM)+ Earphone
Note:	Adapter: BYD + USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	66.8600	40.98	-15.75	25.23	40.00	-14.77	QP	
2		151.2500	41.26	-12.86	28.40	43.50	-15.10	QP	
3		224.4850	39.78	-14.51	25.27	46.00	-20.73	QP	
4		313.2400	33.45	-11.61	21.84	46.00	-24.16	QP	
5		405.3900	32.06	-9.50	22.56	46.00	-23.44	QP	
6		706.0900	31.04	-4.16	26.88	46.00	-19.12	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: BYD + USB Cable: Luxshare +Battery: SCUD


Vertical

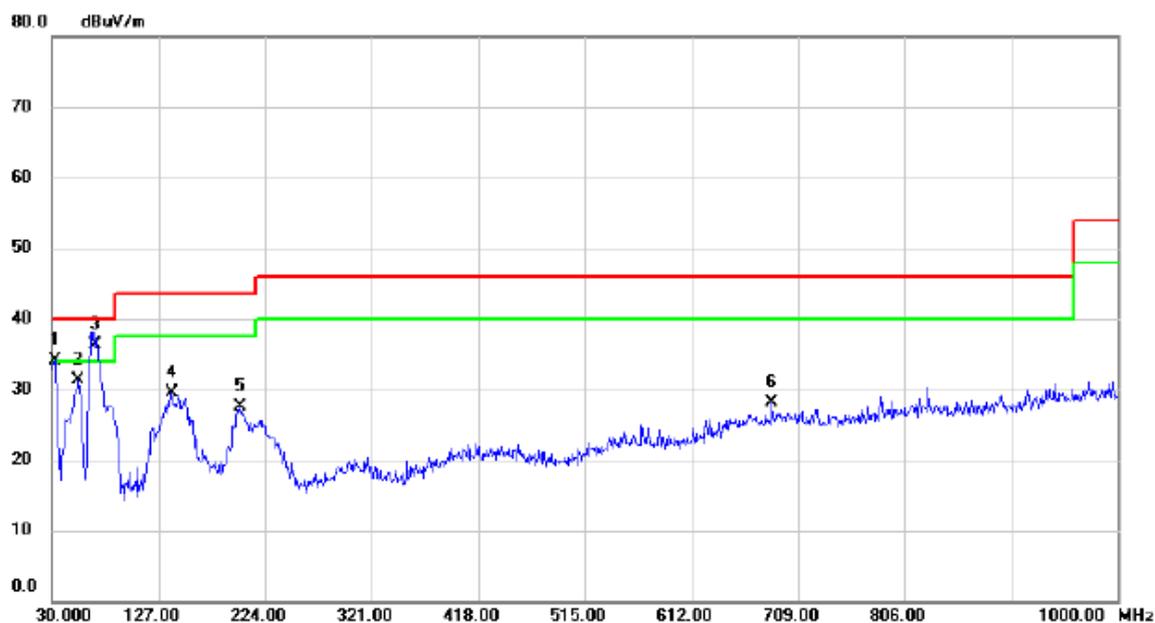

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	32.9100	48.36	-14.29	34.07	40.00	-5.93	QP	
2		54.2500	45.39	-14.18	31.21	40.00	-8.79	QP	
3	*	69.2850	52.47	-16.07	36.40	40.00	-3.60	QP	
4		139.1250	42.70	-13.25	29.45	43.50	-14.05	QP	
5		201.2050	42.94	-15.36	27.58	43.50	-15.92	QP	
6		685.2350	32.65	-4.55	28.10	46.00	-17.90	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: BYD + USB Cable: Luxshare +Battery: SCUD


Horizontal

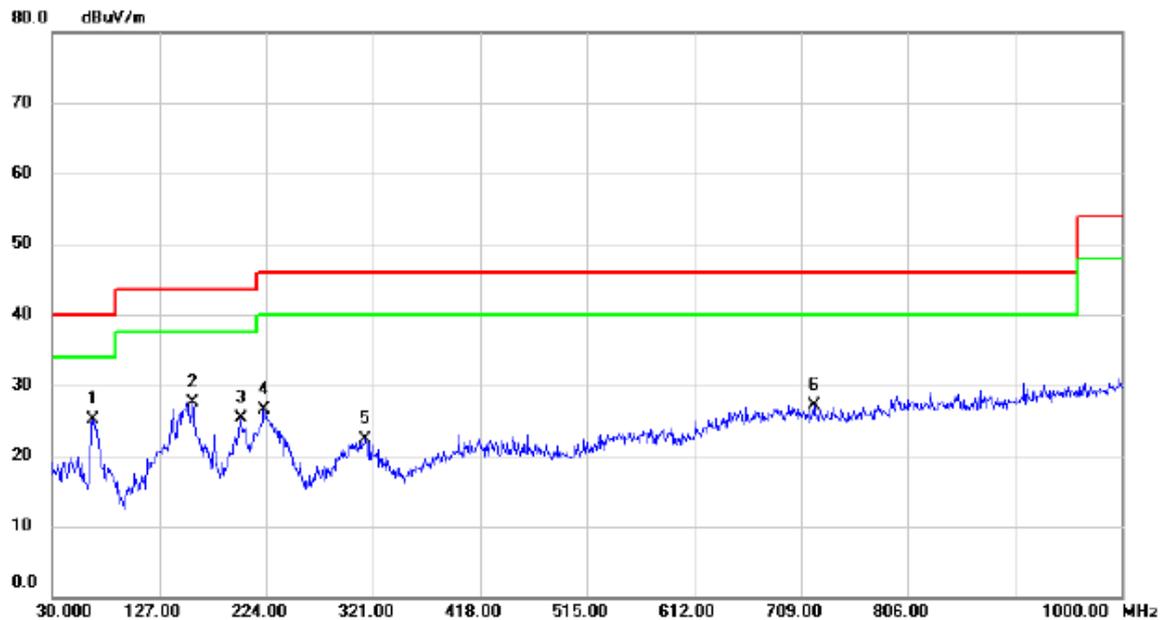

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	66.8600	40.84	-15.75	25.09	40.00	-14.91	QP	
2		157.5550	40.81	-13.31	27.50	43.50	-16.00	QP	
3		201.2050	40.68	-15.36	25.32	43.50	-18.18	QP	
4		221.5750	41.31	-14.77	26.54	46.00	-19.46	QP	
5		314.2100	34.00	-11.60	22.40	46.00	-23.60	QP	
6		720.6400	30.99	-3.82	27.17	46.00	-18.83	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (LTE)
Note:	Adapter: BYD + USB Cable: Luxshare +Battery: SCUD


Vertical

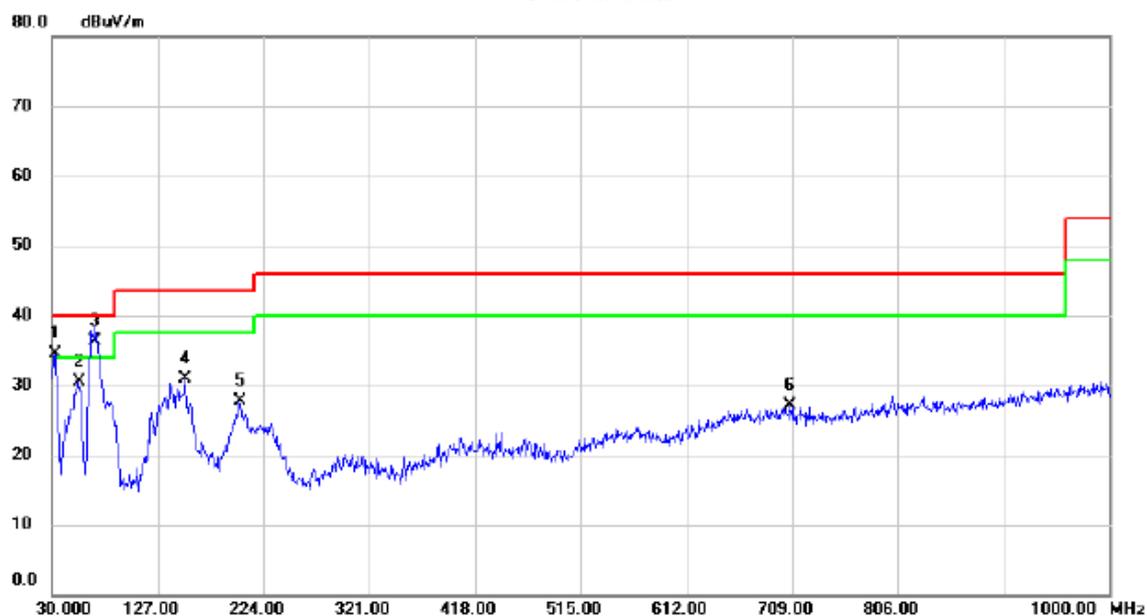

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	32.9100	48.87	-14.29	34.58	40.00	-5.42	QP	
2		54.7350	44.67	-14.24	30.43	40.00	-9.57	QP	
3	*	69.7700	52.45	-16.13	36.32	40.00	-3.68	QP	
4		151.7350	43.71	-12.90	30.81	43.50	-12.69	QP	
5		202.1750	42.85	-15.23	27.62	43.50	-15.88	QP	
6		707.0600	31.22	-4.14	27.08	46.00	-18.92	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (LTE)
Note:	Adapter: BYD + USB Cable: Luxshare +Battery: SCUD

Horizontal

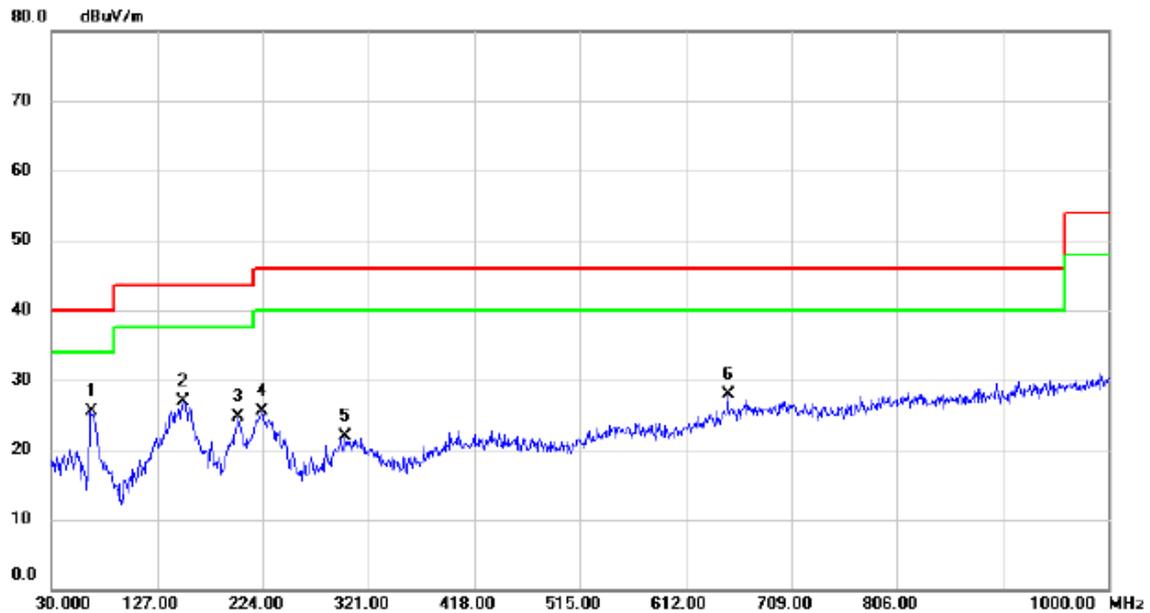


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	66.3750	41.12	-15.68	25.44	40.00	-14.56	QP	
2		151.2500	39.76	-12.86	26.90	43.50	-16.60	QP	
3		200.7200	40.20	-15.44	24.76	43.50	-18.74	QP	
4		223.0300	40.13	-14.64	25.49	46.00	-20.51	QP	
5		300.1450	33.81	-11.86	21.95	46.00	-24.05	QP	
6		651.2850	33.10	-5.11	27.99	46.00	-18.01	QP	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Unirise +Battery: SCUD+ Earphone: QUANCHENG


Vertical

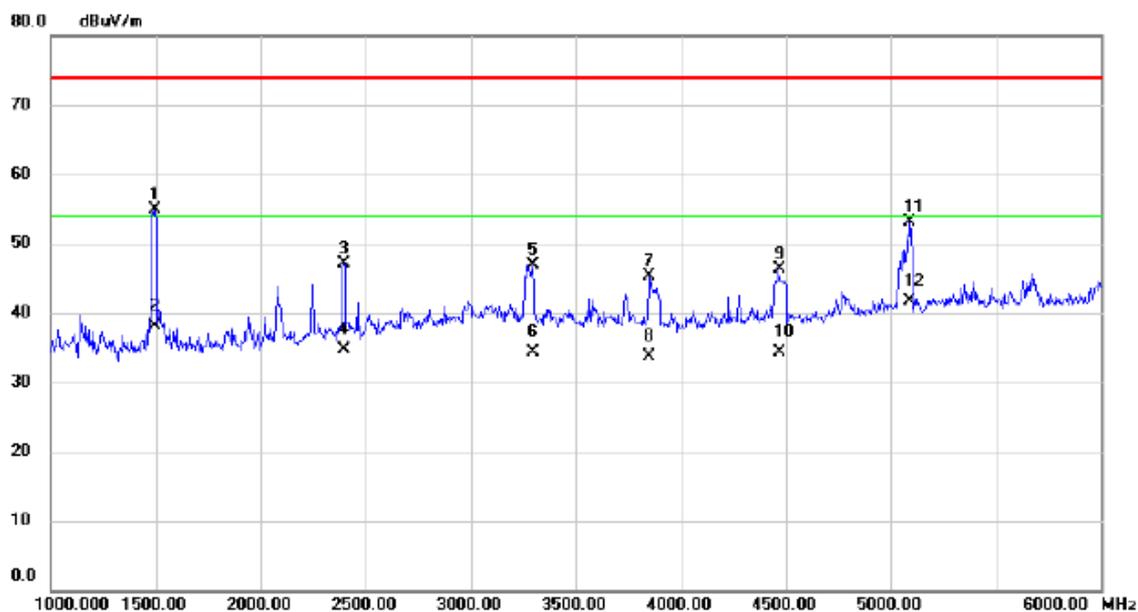

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1497.500	61.82	-6.87	54.95	74.00	-19.05	peak	
2		1497.500	44.94	-6.87	38.07	54.00	-15.93	AVG	
3		2397.500	48.65	-1.59	47.06	74.00	-26.94	peak	
4		2397.500	36.29	-1.59	34.70	54.00	-19.30	AVG	
5		3297.500	45.79	1.16	46.95	74.00	-27.05	peak	
6		3297.500	33.18	1.16	34.34	54.00	-19.66	AVG	
7		3852.500	42.94	2.30	45.24	74.00	-28.76	peak	
8		3852.500	31.48	2.30	33.78	54.00	-20.22	AVG	
9		4467.500	42.86	3.40	46.26	74.00	-27.74	peak	
10		4467.500	30.94	3.40	34.34	54.00	-19.66	AVG	
11		5090.000	47.35	5.68	53.03	74.00	-20.97	peak	
12	*	5090.000	36.11	5.68	41.79	54.00	-12.21	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Unirise +Battery: SCUD+ Earphone: QUANCHENG


Horizontal

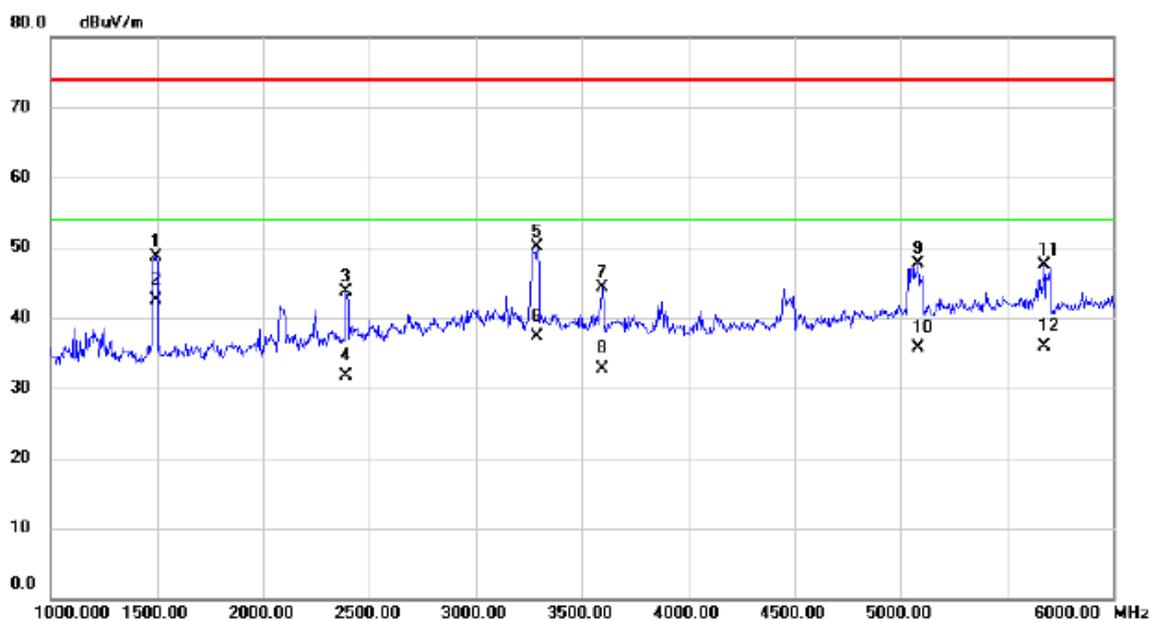

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1495.000	55.55	-6.89	48.66	74.00	-25.34	peak	
2	*	1495.000	49.40	-6.89	42.51	54.00	-11.49	AVG	
3		2392.500	45.27	-1.61	43.66	74.00	-30.34	peak	
4		2392.500	33.35	-1.61	31.74	54.00	-22.26	AVG	
5		3290.000	48.88	1.17	50.05	74.00	-23.95	peak	
6		3290.000	36.14	1.17	37.31	54.00	-16.69	AVG	
7		3597.500	42.77	1.47	44.24	74.00	-29.76	peak	
8		3597.500	31.16	1.47	32.63	54.00	-21.37	AVG	
9		5085.000	42.04	5.66	47.70	74.00	-26.30	peak	
10		5085.000	30.14	5.66	35.80	54.00	-18.20	AVG	
11		5675.000	40.06	7.53	47.59	74.00	-26.41	peak	
12		5675.000	28.39	7.53	35.92	54.00	-18.08	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: PANG NGAI +Battery: DESAY + Earphone: Lianchuang


Vertical

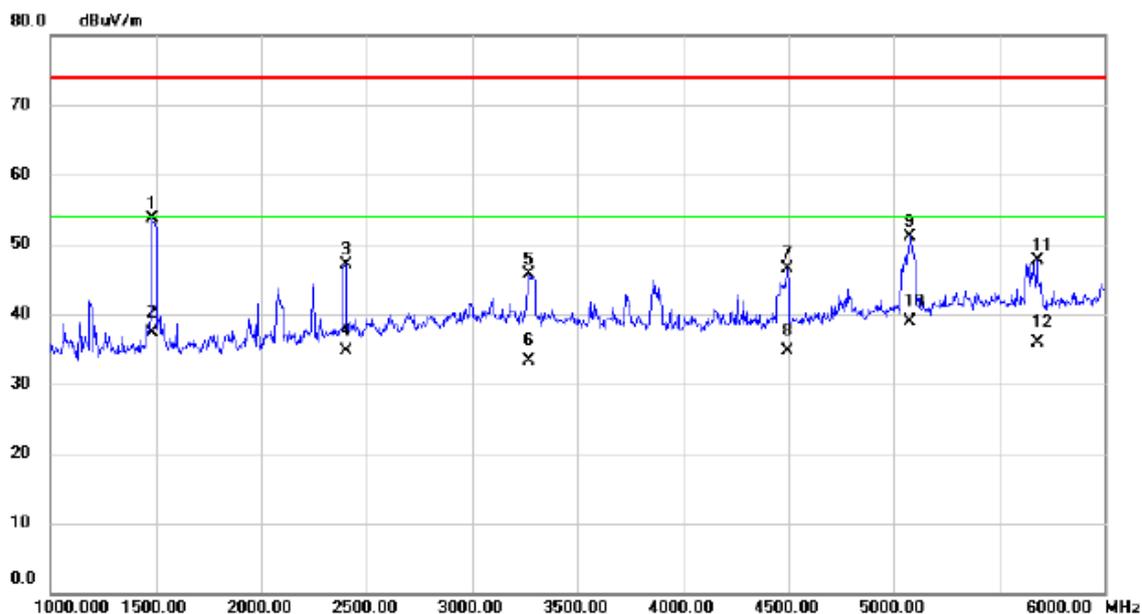

No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1482.500	60.58	-6.92	53.66	74.00	-20.34	peak	
2		1482.500	44.29	-6.92	37.37	54.00	-16.63	AVG	
3		2400.000	48.72	-1.58	47.14	74.00	-26.86	peak	
4		2400.000	36.31	-1.58	34.73	54.00	-19.27	AVG	
5		3270.000	44.56	1.17	45.73	74.00	-28.27	peak	
6		3270.000	32.17	1.17	33.34	54.00	-20.66	AVG	
7		4497.500	43.00	3.43	46.43	74.00	-27.57	peak	
8		4497.500	31.19	3.43	34.62	54.00	-19.38	AVG	
9		5075.000	45.47	5.63	51.10	74.00	-22.90	peak	
10	*	5075.000	33.35	5.63	38.98	54.00	-15.02	AVG	
11		5682.500	40.14	7.55	47.69	74.00	-26.31	peak	
12		5682.500	28.37	7.55	35.92	54.00	-18.08	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: PANG NGAI +Battery: DESAY + Earphone: Lianchuang


Horizontal

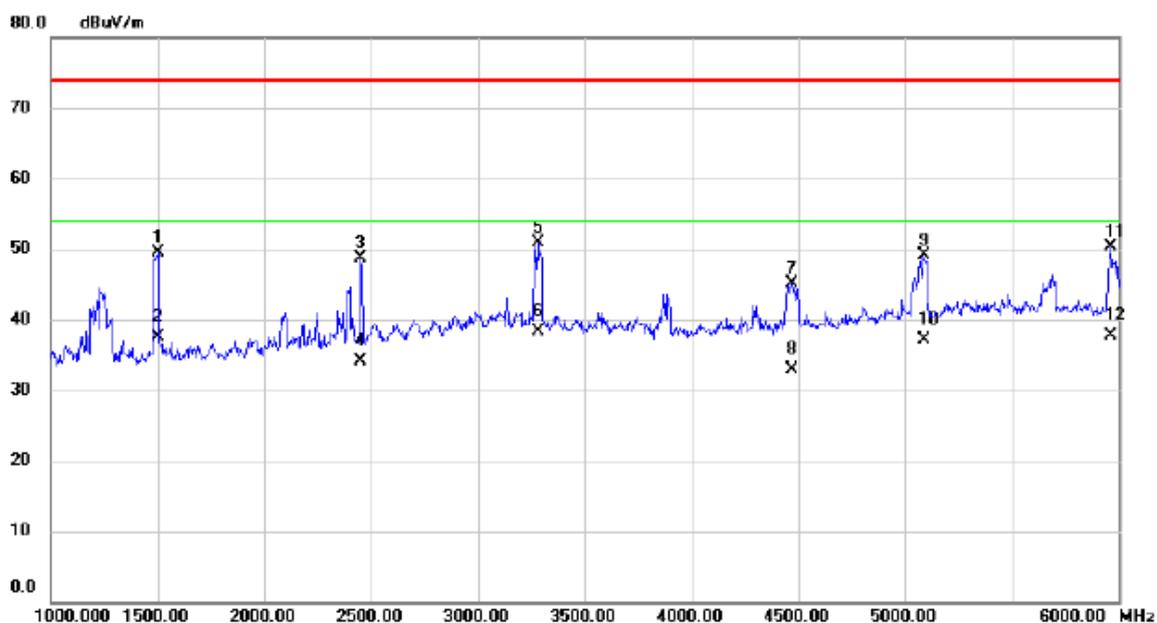

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1500.000	56.35	-6.87	49.48	74.00	-24.52	peak	
2		1500.000	44.28	-6.87	37.41	54.00	-16.59	AVG	
3		2450.000	50.15	-1.41	48.74	74.00	-25.26	peak	
4		2450.000	35.44	-1.41	34.03	54.00	-19.97	AVG	
5		3280.000	49.71	1.17	50.88	74.00	-23.12	peak	
6	*	3280.000	37.09	1.17	38.26	54.00	-15.74	AVG	
7		4470.000	41.65	3.40	45.05	74.00	-28.95	peak	
8		4470.000	29.47	3.40	32.87	54.00	-21.13	AVG	
9		5087.500	43.52	5.67	49.19	74.00	-24.81	peak	
10		5087.500	31.38	5.67	37.05	54.00	-16.95	AVG	
11		5960.000	41.86	8.38	50.24	74.00	-23.76	peak	
12		5960.000	29.34	8.38	37.72	54.00	-16.28	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: CONNREX +Battery: Sunwoda + Earphone: GoerTek / HA1-3


Vertical

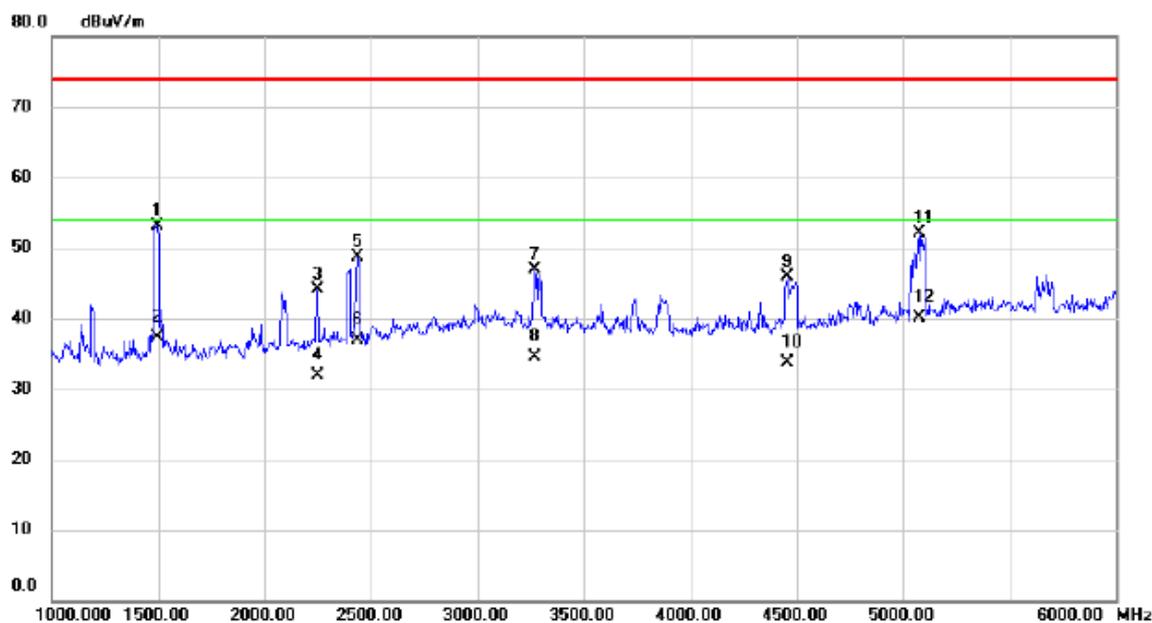

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1497.500	60.03	-6.87	53.16	74.00	-20.84	peak	
2	1497.500	44.27	-6.87	37.40	54.00	-16.60	AVG	
3	2247.500	46.31	-2.14	44.17	74.00	-29.83	peak	
4	2247.500	34.13	-2.14	31.99	54.00	-22.01	AVG	
5	2435.000	50.19	-1.46	48.73	74.00	-25.27	peak	
6	2435.000	38.33	-1.46	36.87	54.00	-17.13	AVG	
7	3272.500	45.66	1.17	46.83	74.00	-27.17	peak	
8	3272.500	33.26	1.17	34.43	54.00	-19.57	AVG	
9	4457.500	42.43	3.38	45.81	74.00	-28.19	peak	
10	4457.500	30.40	3.38	33.78	54.00	-20.22	AVG	
11	5077.500	46.56	5.64	52.20	74.00	-21.80	peak	
12 *	5077.500	34.43	5.64	40.07	54.00	-13.93	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: CONNREX +Battery: Sunwoda + Earphone: GoerTek / HA1-3


Horizontal

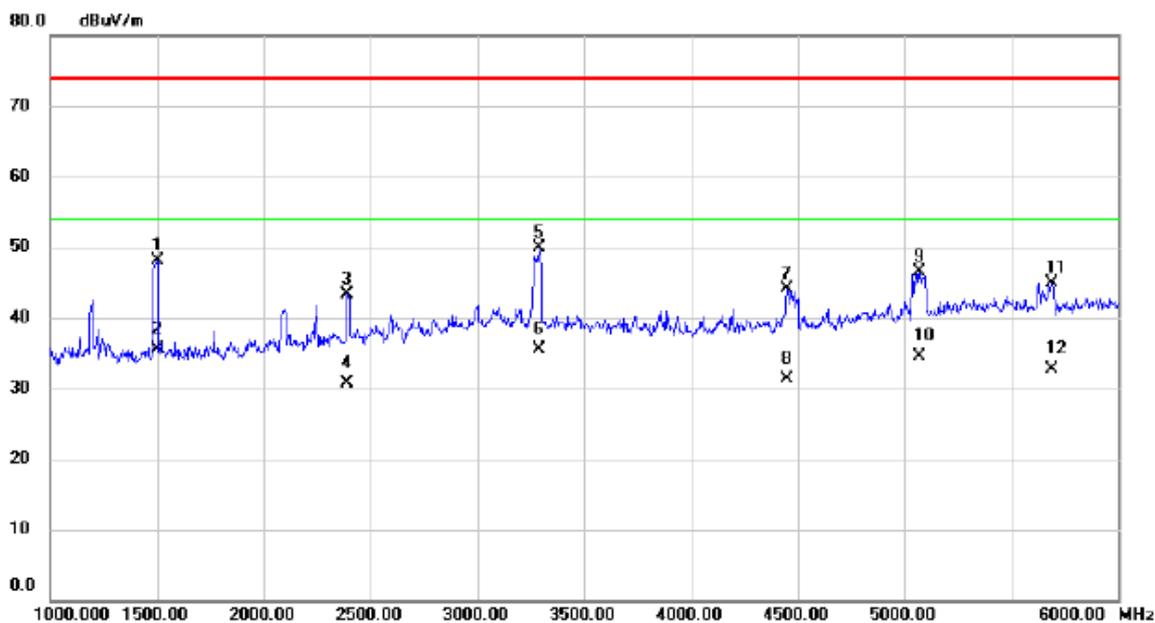

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1500.000	54.93	-6.87	48.06	74.00	-25.94	peak	
2	*	1500.000	42.34	-6.87	35.47	54.00	-18.53	AVG	
3		2390.000	44.98	-1.62	43.36	74.00	-30.64	peak	
4		2390.000	32.26	-1.62	30.64	54.00	-23.36	AVG	
5		3290.000	48.81	1.17	49.98	74.00	-24.02	peak	
6		3290.000	34.26	1.17	35.43	54.00	-18.57	AVG	
7		4452.500	40.68	3.37	44.05	74.00	-29.95	peak	
8		4452.500	27.94	3.37	31.31	54.00	-22.69	AVG	
9		5070.000	40.88	5.61	46.49	74.00	-27.51	peak	
10		5070.000	28.83	5.61	34.44	54.00	-19.56	AVG	
11		5690.000	37.39	7.58	44.97	74.00	-29.03	peak	
12		5690.000	25.05	7.58	32.63	54.00	-21.37	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Luxshare +Battery: DESAY + Earphone: GoerTek / HG-04A


Vertical

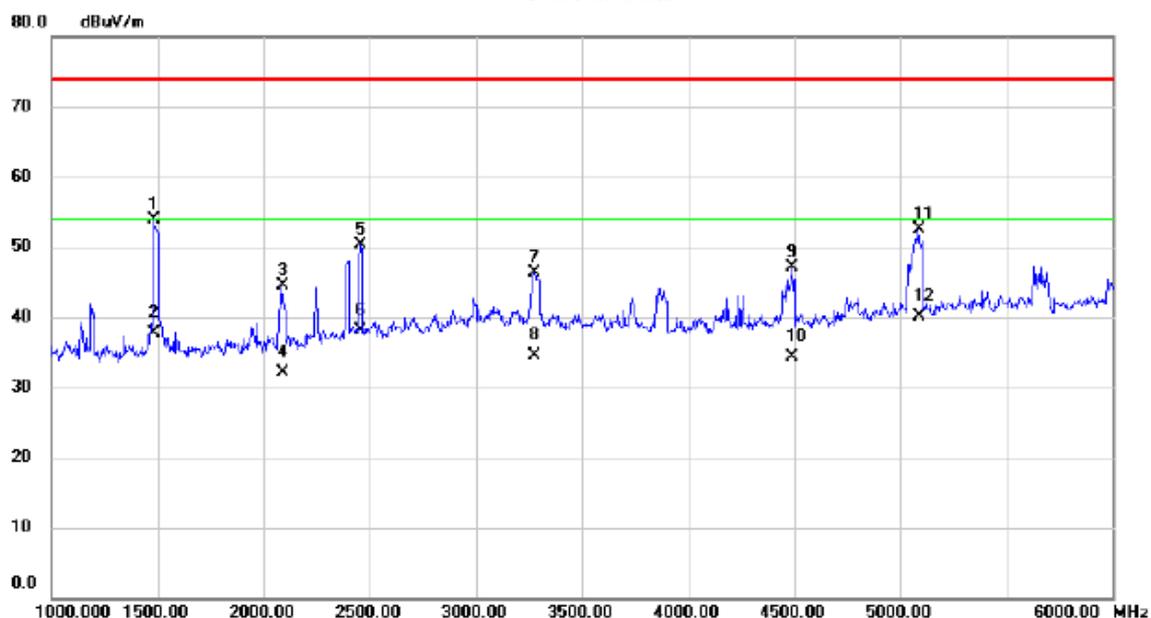

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1482.500	60.86	-6.92	53.94	74.00	-20.06	peak	
2		1482.500	44.60	-6.92	37.68	54.00	-16.32	AVG	
3		2087.500	47.26	-2.72	44.54	74.00	-29.46	peak	
4		2087.500	34.83	-2.72	32.11	54.00	-21.89	AVG	
5		2457.500	51.74	-1.38	50.36	74.00	-23.64	peak	
6		2457.500	39.40	-1.38	38.02	54.00	-15.98	AVG	
7		3277.500	45.16	1.17	46.33	74.00	-27.67	peak	
8		3277.500	33.24	1.17	34.41	54.00	-19.59	AVG	
9		4490.000	43.77	3.42	47.19	74.00	-26.81	peak	
10		4490.000	30.96	3.42	34.38	54.00	-19.62	AVG	
11		5087.500	46.89	5.67	52.56	74.00	-21.44	peak	
12	*	5087.500	34.47	5.67	40.14	54.00	-13.86	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: Luxshare +Battery: DESAY + Earphone: GoerTek / HG-04A


Horizontal

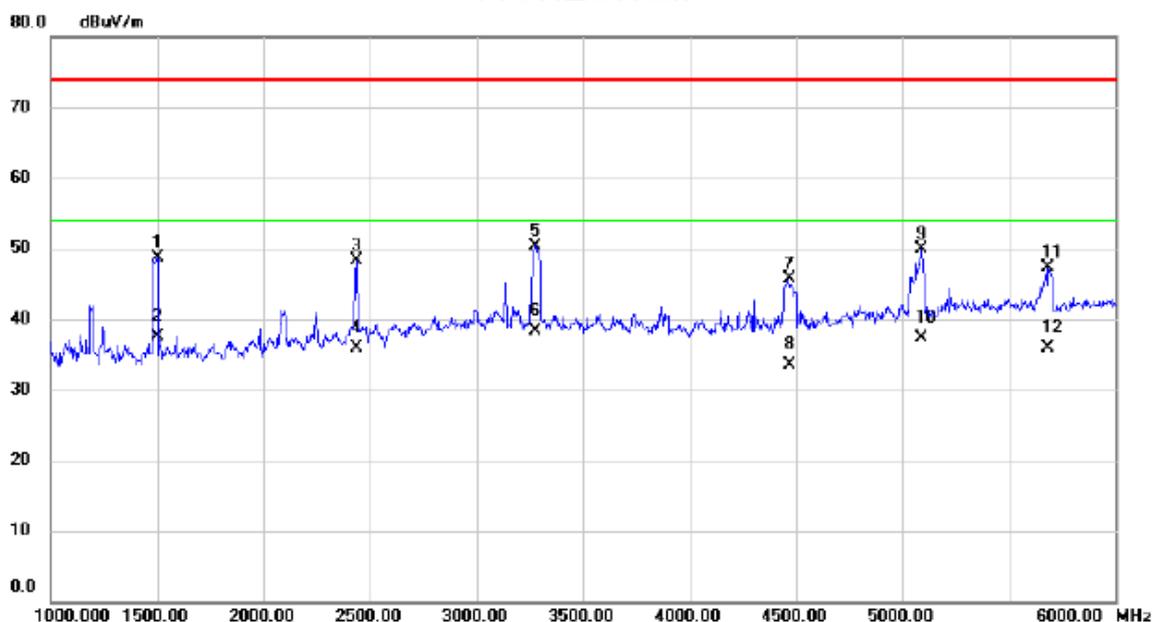

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1500.000	55.62	-6.87	48.75	74.00	-25.25	peak	
2	1500.000	44.30	-6.87	37.43	54.00	-16.57	AVG	
3	2437.500	49.79	-1.45	48.34	74.00	-25.66	peak	
4	2437.500	37.35	-1.45	35.90	54.00	-18.10	AVG	
5	3275.000	49.23	1.17	50.40	74.00	-23.60	peak	
6 *	3275.000	37.23	1.17	38.40	54.00	-15.60	AVG	
7	4467.500	42.21	3.40	45.61	74.00	-28.39	peak	
8	4467.500	30.12	3.40	33.52	54.00	-20.48	AVG	
9	5092.500	44.14	5.68	49.82	74.00	-24.18	peak	
10	5092.500	31.71	5.68	37.39	54.00	-16.61	AVG	
11	5685.000	39.72	7.55	47.27	74.00	-26.73	peak	
12	5685.000	28.38	7.55	35.93	54.00	-18.07	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: FOXCONN +Battery: Sunwoda + Earphone: MERRY


Vertical

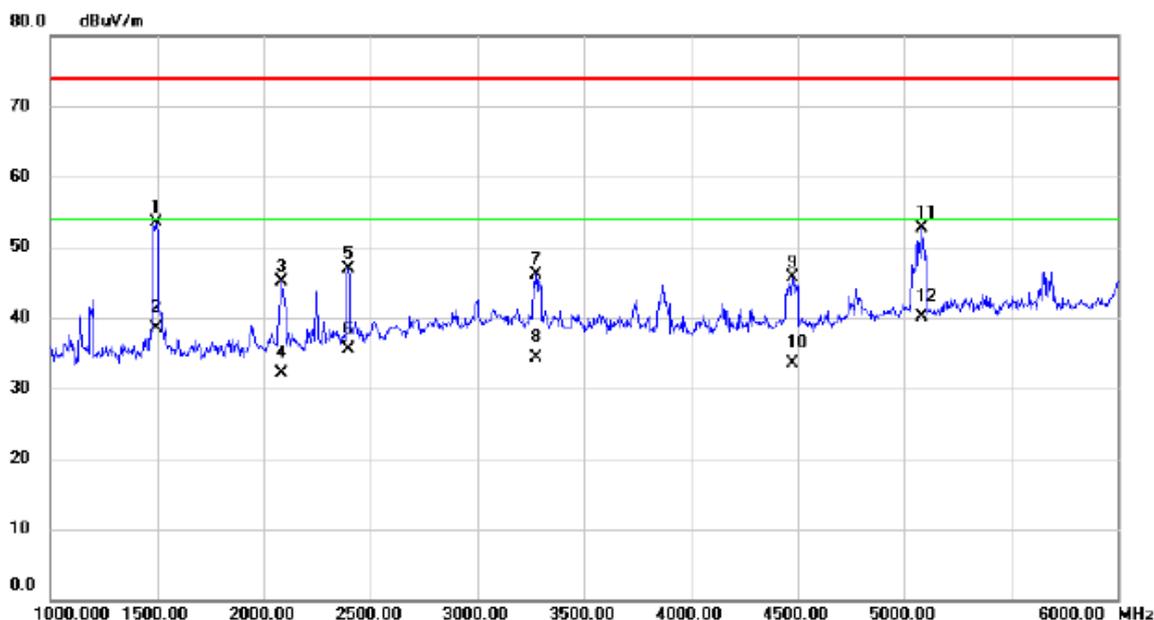

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1497.500	60.46	-6.87	53.59	74.00	-20.41	peak	
2		1497.500	45.34	-6.87	38.47	54.00	-15.53	AVG	
3		2080.000	47.86	-2.75	45.11	74.00	-28.89	peak	
4		2080.000	34.81	-2.75	32.06	54.00	-21.94	AVG	
5		2397.500	48.54	-1.59	46.95	74.00	-27.05	peak	
6		2397.500	37.01	-1.59	35.42	54.00	-18.58	AVG	
7		3277.500	45.00	1.17	46.17	74.00	-27.83	peak	
8		3277.500	33.22	1.17	34.39	54.00	-19.61	AVG	
9		4477.500	42.31	3.40	45.71	74.00	-28.29	peak	
10		4477.500	30.18	3.40	33.58	54.00	-20.42	AVG	
11		5082.500	47.07	5.65	52.72	74.00	-21.28	peak	
12	*	5082.500	34.46	5.65	40.11	54.00	-13.89	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+Idle+ Earphone
Note:	USB Cable: FOXCONN +Battery: Sunwoda + Earphone: MERRY


Horizontal

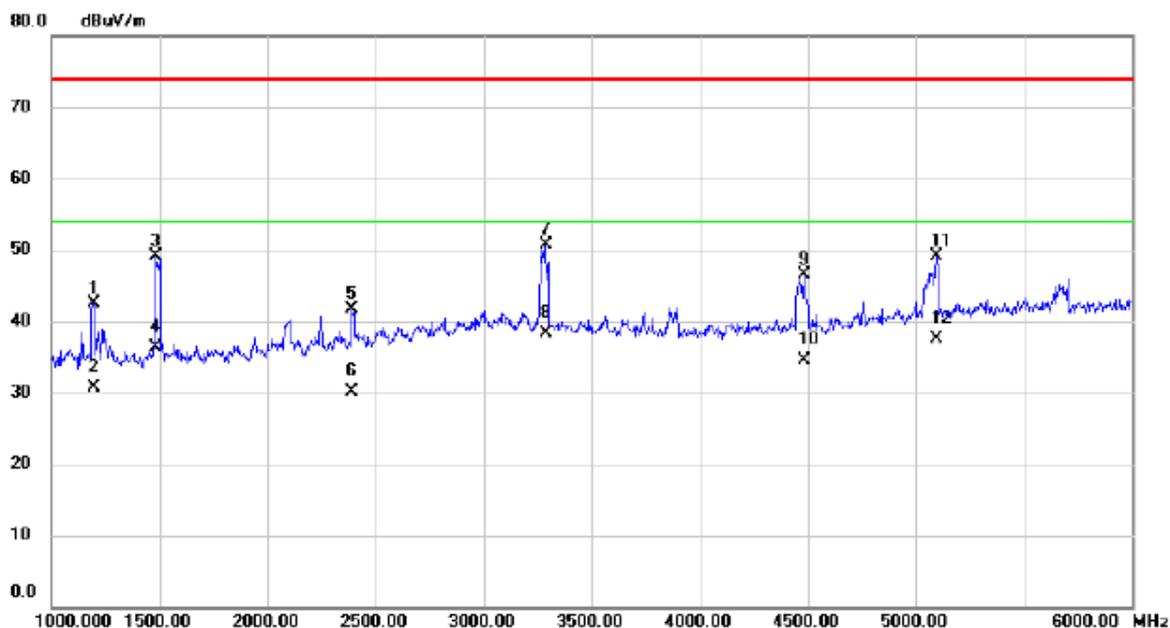

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1197.500	50.26	-7.68	42.58	74.00	-31.42	peak	
2		1197.500	38.45	-7.68	30.77	54.00	-23.23	AVG	
3		1485.000	55.95	-6.92	49.03	74.00	-24.97	peak	
4		1485.000	43.27	-6.92	36.35	54.00	-17.65	AVG	
5		2390.000	43.28	-1.62	41.66	74.00	-32.34	peak	
6		2390.000	31.75	-1.62	30.13	54.00	-23.87	AVG	
7		3287.500	49.47	1.16	50.63	74.00	-23.37	peak	
8	*	3287.500	37.24	1.16	38.40	54.00	-15.60	AVG	
9		4480.000	43.04	3.40	46.44	74.00	-27.56	peak	
10		4480.000	31.12	3.40	34.52	54.00	-19.48	AVG	
11		5095.000	43.41	5.70	49.11	74.00	-24.89	peak	
12		5095.000	31.77	5.70	37.47	54.00	-16.53	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: Phitek +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Vertical

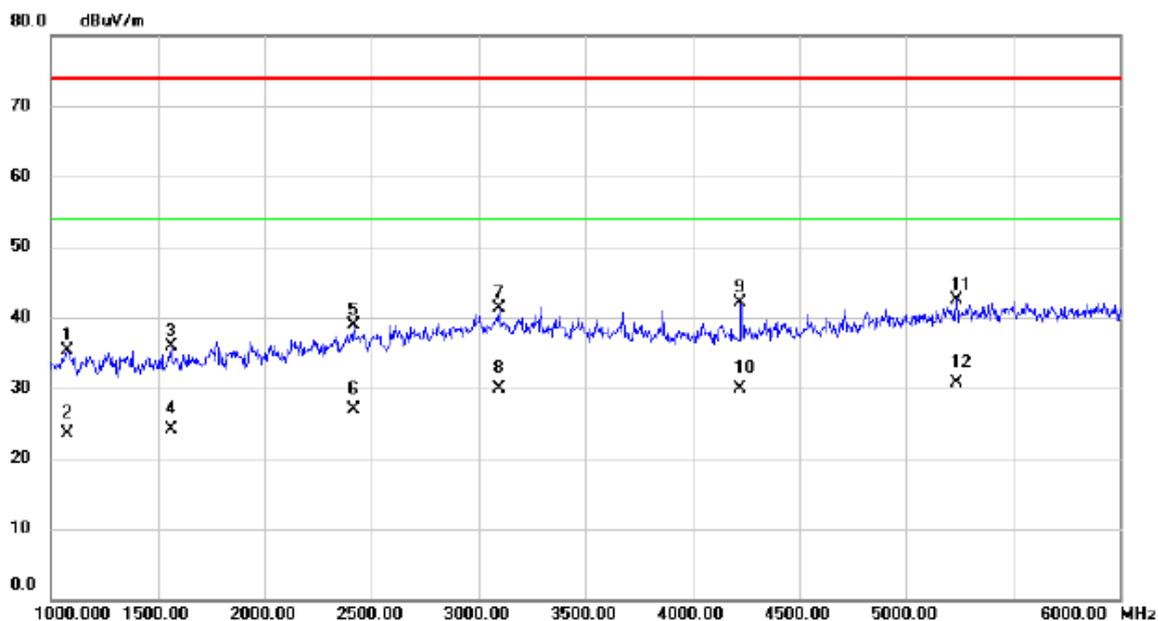

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1075.000	43.29	-8.00	35.29	74.00	-38.71	peak	
2		1075.000	31.45	-8.00	23.45	54.00	-30.55	AVG	
3		1562.500	42.24	-6.39	35.85	74.00	-38.15	peak	
4		1562.500	30.50	-6.39	24.11	54.00	-29.89	AVG	
5		2415.000	40.37	-1.53	38.84	74.00	-35.16	peak	
6		2415.000	28.49	-1.53	26.96	54.00	-27.04	AVG	
7		3097.500	40.17	1.19	41.36	74.00	-32.64	peak	
8		3097.500	28.71	1.19	29.90	54.00	-24.10	AVG	
9		4225.000	39.12	3.08	42.20	74.00	-31.80	peak	
10		4225.000	26.83	3.08	29.91	54.00	-24.09	AVG	
11		5237.500	36.45	6.15	42.60	74.00	-31.40	peak	
12	*	5237.500	24.54	6.15	30.69	54.00	-23.31	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: Phitek +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Horizontal

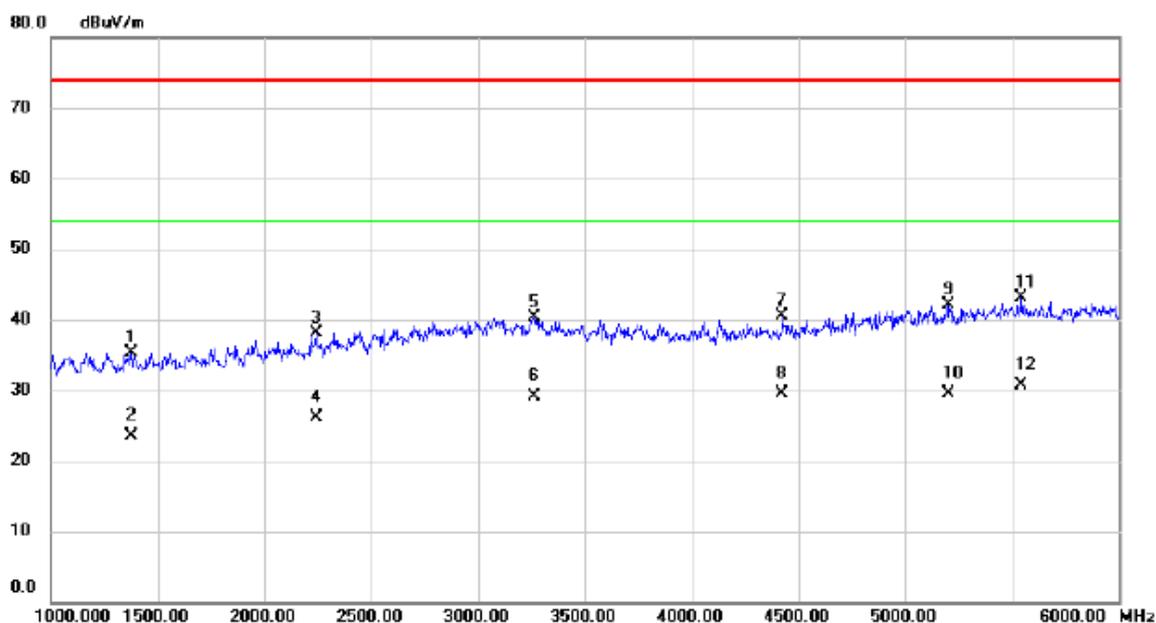

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1375.000	42.61	-7.21	35.40	74.00	-38.60	peak	
2	1375.000	30.67	-7.21	23.46	54.00	-30.54	AVG	
3	2240.000	40.26	-2.17	38.09	74.00	-35.91	peak	
4	2240.000	28.20	-2.17	26.03	54.00	-27.97	AVG	
5	3262.500	39.18	1.17	40.35	74.00	-33.65	peak	
6	3262.500	27.94	1.17	29.11	54.00	-24.89	AVG	
7	4425.000	37.27	3.33	40.60	74.00	-33.40	peak	
8	4425.000	26.14	3.33	29.47	54.00	-24.53	AVG	
9	5202.500	36.07	6.04	42.11	74.00	-31.89	peak	
10	5202.500	23.37	6.04	29.41	54.00	-24.59	AVG	
11	5545.000	35.93	7.15	43.08	74.00	-30.92	peak	
12 *	5545.000	23.53	7.15	30.68	54.00	-23.32	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: BYD +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Vertical

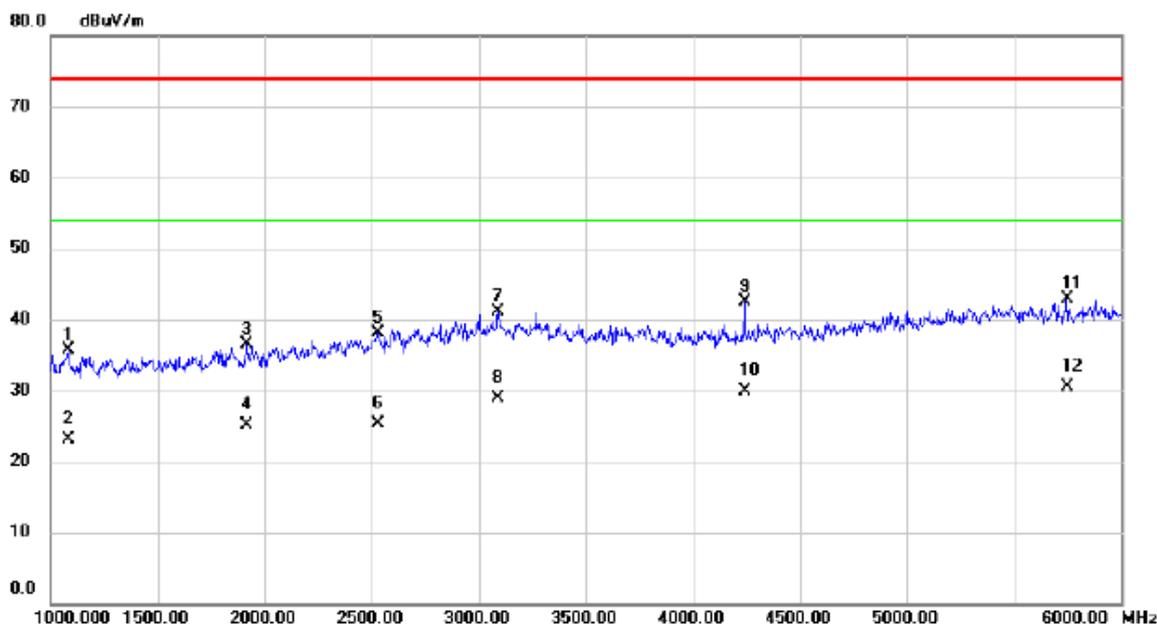

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1080.000	43.65	-7.99	35.66	74.00	-38.34	peak	
2		1080.000	31.03	-7.99	23.04	54.00	-30.96	AVG	
3		1915.000	40.12	-3.70	36.42	74.00	-37.58	peak	
4		1915.000	28.76	-3.70	25.06	54.00	-28.94	AVG	
5		2527.500	39.15	-1.08	38.07	74.00	-35.93	peak	
6		2527.500	26.36	-1.08	25.28	54.00	-28.72	AVG	
7		3090.000	39.86	1.19	41.05	74.00	-32.95	peak	
8		3090.000	27.62	1.19	28.81	54.00	-25.19	AVG	
9		4242.500	39.45	3.11	42.56	74.00	-31.44	peak	
10		4242.500	26.77	3.11	29.88	54.00	-24.12	AVG	
11		5747.500	35.08	7.74	42.82	74.00	-31.18	peak	
12	*	5747.500	22.75	7.74	30.49	54.00	-23.51	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: BYD +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Horizontal

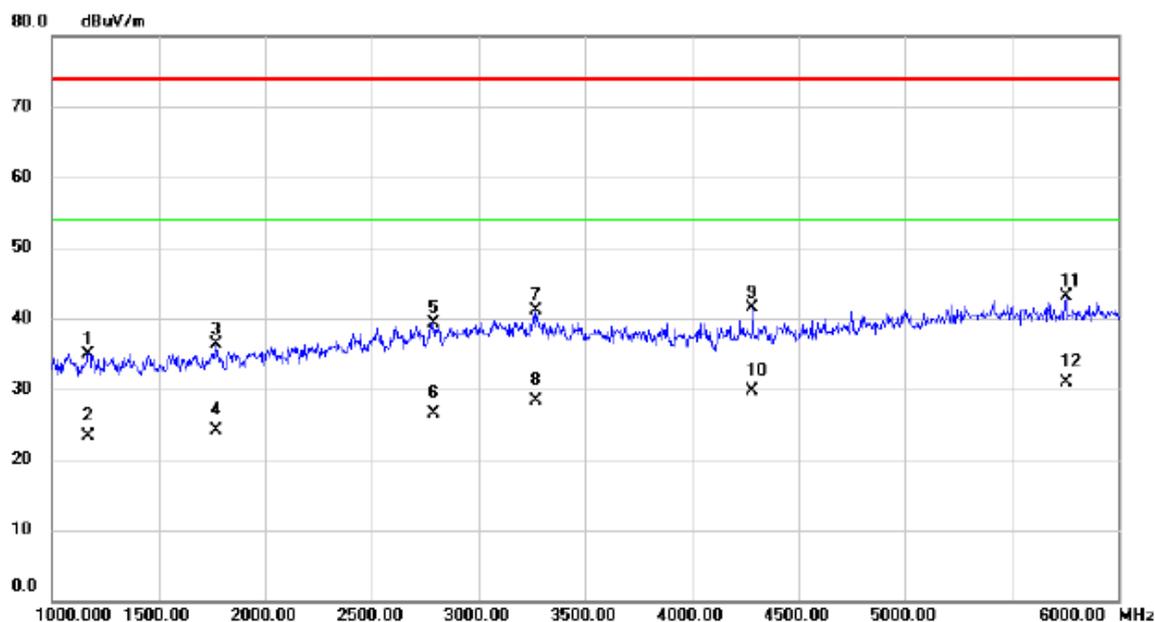

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1170.000	42.74	-7.75	34.99	74.00	-39.01	peak	
2		1170.000	31.03	-7.75	23.28	54.00	-30.72	AVG	
3		1770.000	41.17	-4.80	36.37	74.00	-37.63	peak	
4		1770.000	28.90	-4.80	24.10	54.00	-29.90	AVG	
5		2792.500	39.03	0.20	39.23	74.00	-34.77	peak	
6		2792.500	26.37	0.20	26.57	54.00	-27.43	AVG	
7		3272.500	39.88	1.17	41.05	74.00	-32.95	peak	
8		3272.500	27.12	1.17	28.29	54.00	-25.71	AVG	
9		4285.000	38.40	3.16	41.56	74.00	-32.44	peak	
10		4285.000	26.60	3.16	29.76	54.00	-24.24	AVG	
11		5757.500	35.28	7.78	43.06	74.00	-30.94	peak	
12	*	5757.500	23.21	7.78	30.99	54.00	-23.01	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: HK +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Vertical

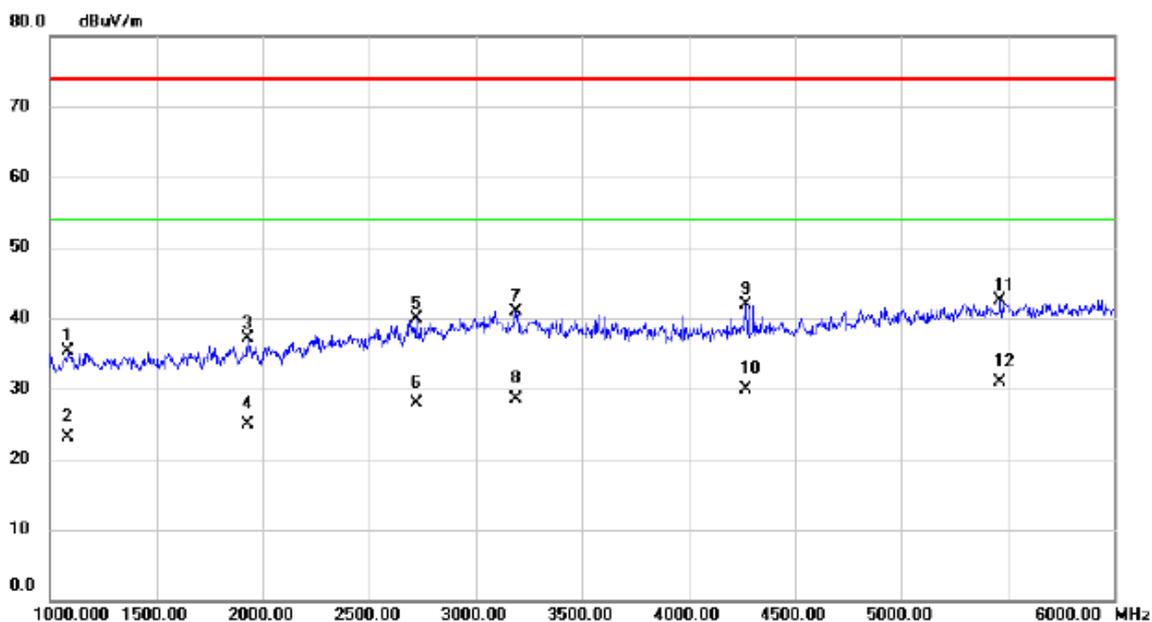

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1085.000	43.19	-7.97	35.22	74.00	-38.78	peak	
2		1085.000	31.06	-7.97	23.09	54.00	-30.91	AVG	
3		1932.500	40.57	-3.55	37.02	74.00	-36.98	peak	
4		1932.500	28.38	-3.55	24.83	54.00	-29.17	AVG	
5		2722.500	40.09	-0.15	39.94	74.00	-34.06	peak	
6		2722.500	28.12	-0.15	27.97	54.00	-26.03	AVG	
7		3190.000	39.80	1.17	40.97	74.00	-33.03	peak	
8		3190.000	27.37	1.17	28.54	54.00	-25.46	AVG	
9		4272.500	38.69	3.14	41.83	74.00	-32.17	peak	
10		4272.500	26.82	3.14	29.96	54.00	-24.04	AVG	
11		5465.000	35.58	6.90	42.48	74.00	-31.52	peak	
12	*	5465.000	24.05	6.90	30.95	54.00	-23.05	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: HK +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Horizontal

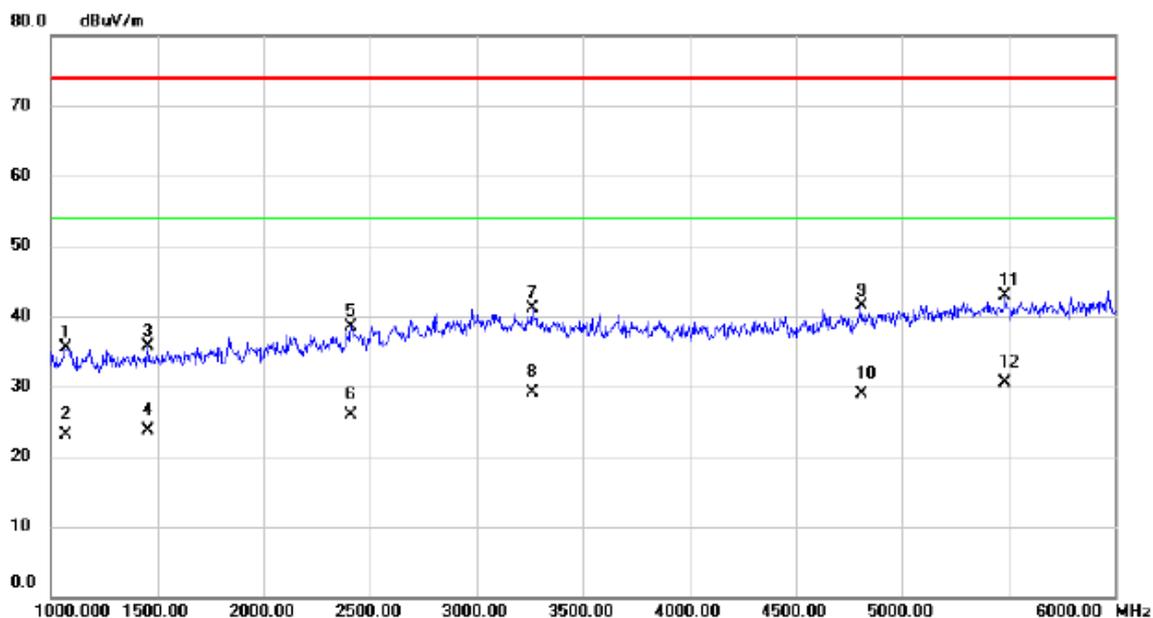

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1067.500	43.55	-8.02	35.53	74.00	-38.47	peak	
2		1067.500	31.04	-8.02	23.02	54.00	-30.98	AVG	
3		1457.500	42.67	-6.98	35.69	74.00	-38.31	peak	
4		1457.500	30.73	-6.98	23.75	54.00	-30.25	AVG	
5		2412.500	39.95	-1.54	38.41	74.00	-35.59	peak	
6		2412.500	27.46	-1.54	25.92	54.00	-28.08	AVG	
7		3262.500	39.94	1.17	41.11	74.00	-32.89	peak	
8		3262.500	27.92	1.17	29.09	54.00	-24.91	AVG	
9		4807.500	36.78	4.63	41.41	74.00	-32.59	peak	
10		4807.500	24.24	4.63	28.87	54.00	-25.13	AVG	
11		5485.000	36.03	6.96	42.99	74.00	-31.01	peak	
12	*	5485.000	23.48	6.96	30.44	54.00	-23.56	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+Playing+Speaker
Note:	Adapter: BYD + USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Vertical

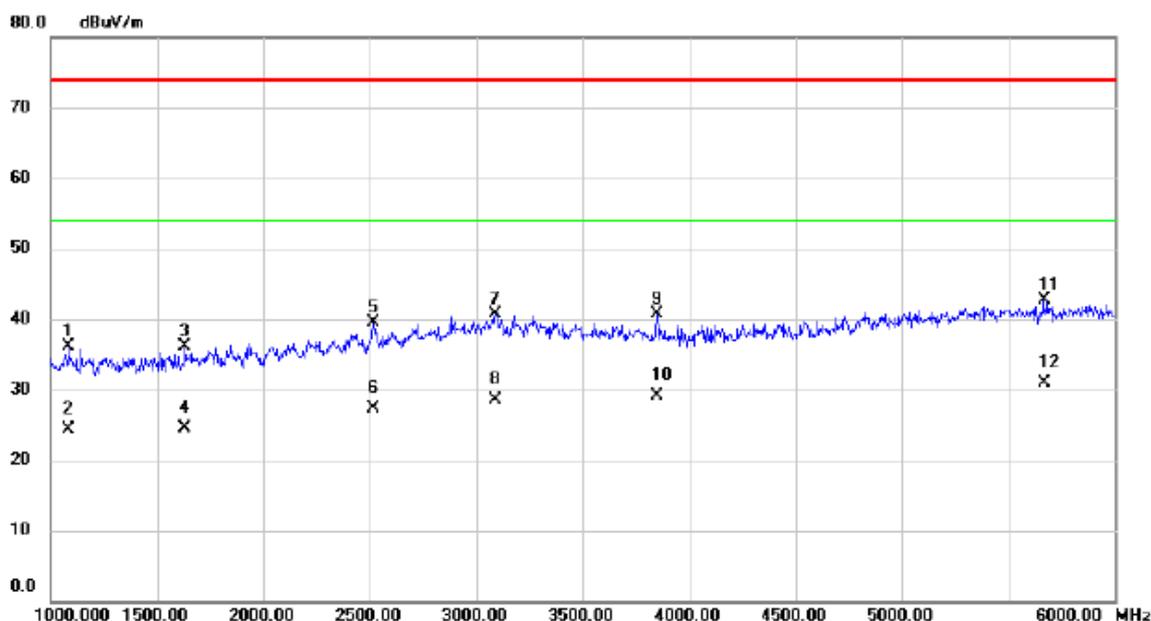

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1085.000	44.10	-7.97	36.13	74.00	-37.87	peak	
2		1085.000	32.36	-7.97	24.39	54.00	-29.61	AVG	
3		1630.000	41.93	-5.88	36.05	74.00	-37.95	peak	
4		1630.000	30.36	-5.88	24.48	54.00	-29.52	AVG	
5		2515.000	40.68	-1.15	39.53	74.00	-34.47	peak	
6		2515.000	28.43	-1.15	27.28	54.00	-26.72	AVG	
7		3092.500	39.43	1.20	40.63	74.00	-33.37	peak	
8		3092.500	27.37	1.20	28.57	54.00	-25.43	AVG	
9		3850.000	38.37	2.30	40.67	74.00	-33.33	peak	
10		3850.000	26.81	2.30	29.11	54.00	-24.89	AVG	
11		5667.500	35.23	7.50	42.73	74.00	-31.27	peak	
12	*	5667.500	23.32	7.50	30.82	54.00	-23.18	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+Playing+Speaker
Note:	Adapter: BYD + USB Cable: Luxshare +Battery: SCUD


Horizontal

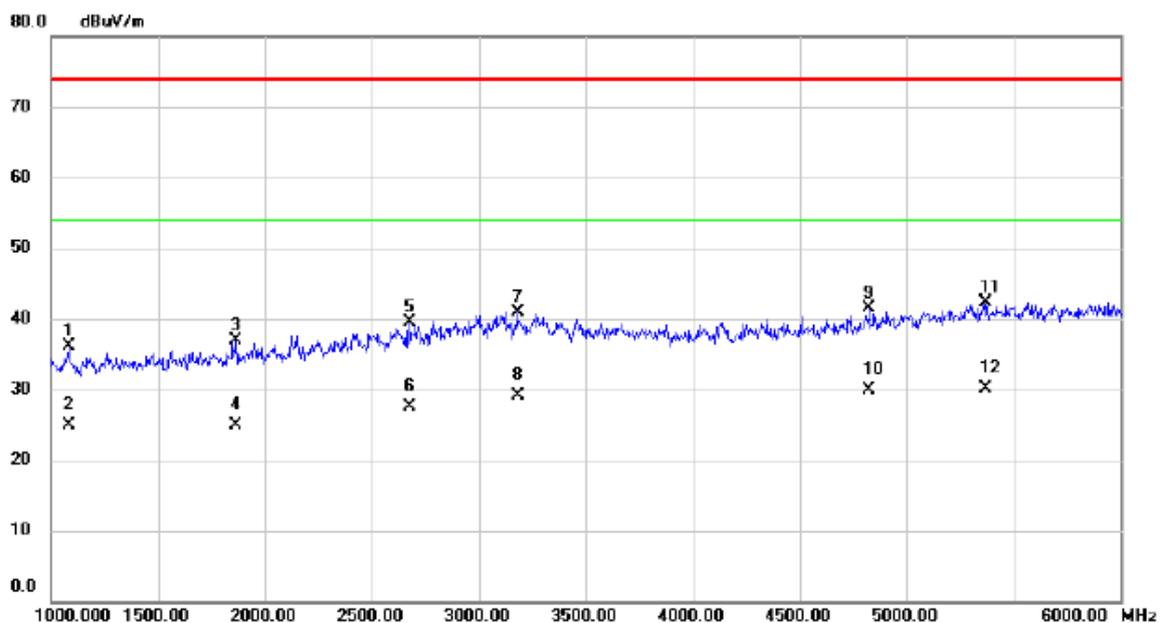

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1082.500	44.16	-7.99	36.17	74.00	-37.83	peak	
2		1082.500	32.81	-7.99	24.82	54.00	-29.18	AVG	
3		1865.000	40.97	-4.08	36.89	74.00	-37.11	peak	
4		1865.000	29.08	-4.08	25.00	54.00	-29.00	AVG	
5		2675.000	39.78	-0.36	39.42	74.00	-34.58	peak	
6		2675.000	27.87	-0.36	27.51	54.00	-26.49	AVG	
7		3182.500	39.66	1.18	40.84	74.00	-33.16	peak	
8		3182.500	27.88	1.18	29.06	54.00	-24.94	AVG	
9		4825.000	36.80	4.69	41.49	74.00	-32.51	peak	
10		4825.000	25.28	4.69	29.97	54.00	-24.03	AVG	
11		5372.500	35.73	6.60	42.33	74.00	-31.67	peak	
12	*	5372.500	23.51	6.60	30.11	54.00	-23.89	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (GSM)+ Earphone
Note:	Adapter: BYD + USB Cable: Luxshare +Battery: SCUD


Vertical

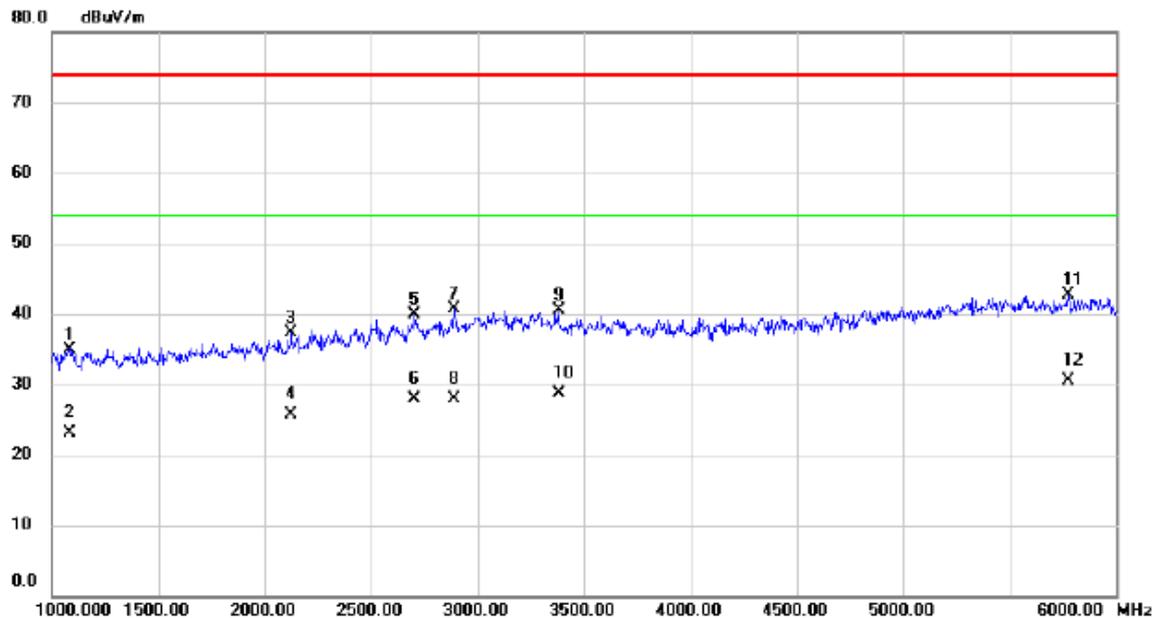

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1082.500	42.99	-7.99	35.00	74.00	-39.00	peak	
2		1082.500	31.04	-7.99	23.05	54.00	-30.95	AVG	
3		2125.000	39.94	-2.58	37.36	74.00	-36.64	peak	
4		2125.000	28.30	-2.58	25.72	54.00	-28.28	AVG	
5		2705.000	40.05	-0.23	39.82	74.00	-34.18	peak	
6		2705.000	28.14	-0.23	27.91	54.00	-26.09	AVG	
7		2892.500	40.03	0.69	40.72	74.00	-33.28	peak	
8		2892.500	27.28	0.69	27.97	54.00	-26.03	AVG	
9		3382.500	39.35	1.15	40.50	74.00	-33.50	peak	
10		3382.500	27.51	1.15	28.66	54.00	-25.34	AVG	
11		5775.000	34.93	7.83	42.76	74.00	-31.24	peak	
12	*	5775.000	22.69	7.83	30.52	54.00	-23.48	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (GSM)+ Earphone
Note:	Adapter: BYD + USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Horizontal

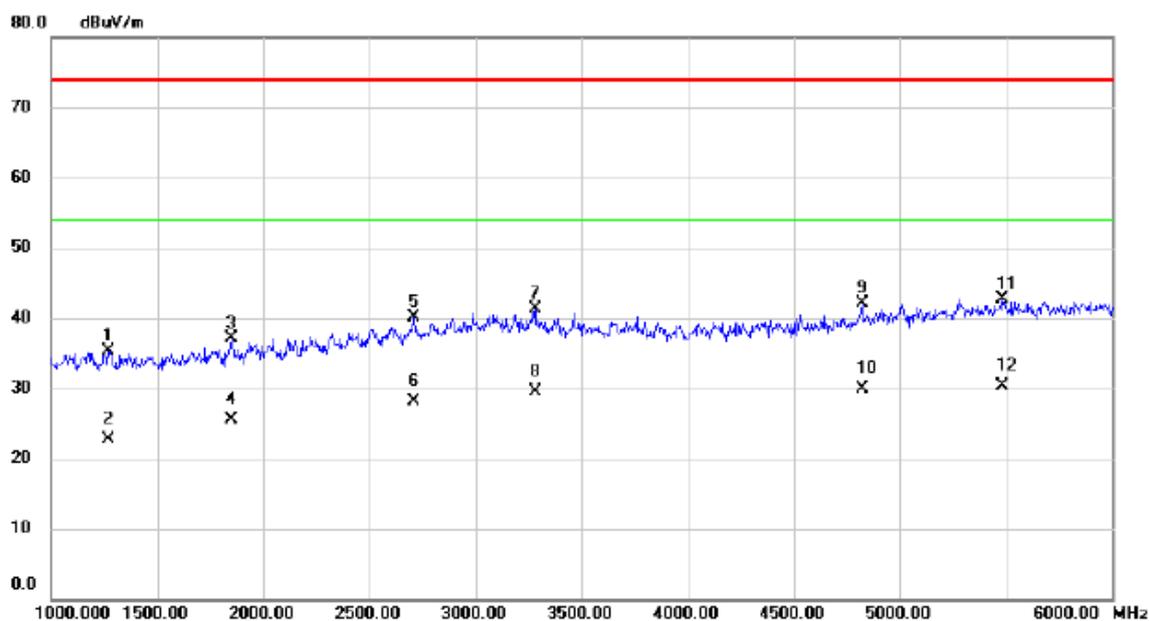

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1270.000	42.74	-7.48	35.26	74.00	-38.74	peak	
2		1270.000	30.09	-7.48	22.61	54.00	-31.39	AVG	
3		1850.000	41.28	-4.19	37.09	74.00	-36.91	peak	
4		1850.000	29.62	-4.19	25.43	54.00	-28.57	AVG	
5		2712.500	40.23	-0.19	40.04	74.00	-33.96	peak	
6		2712.500	28.35	-0.19	28.16	54.00	-25.84	AVG	
7		3280.000	40.23	1.17	41.40	74.00	-32.60	peak	
8		3280.000	28.34	1.17	29.51	54.00	-24.49	AVG	
9		4820.000	37.47	4.68	42.15	74.00	-31.85	peak	
10		4820.000	25.25	4.68	29.93	54.00	-24.07	AVG	
11		5482.500	35.80	6.95	42.75	74.00	-31.25	peak	
12	*	5482.500	23.43	6.95	30.38	54.00	-23.62	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: BYD + USB Cable: Luxshare +Battery: SCUD


Vertical

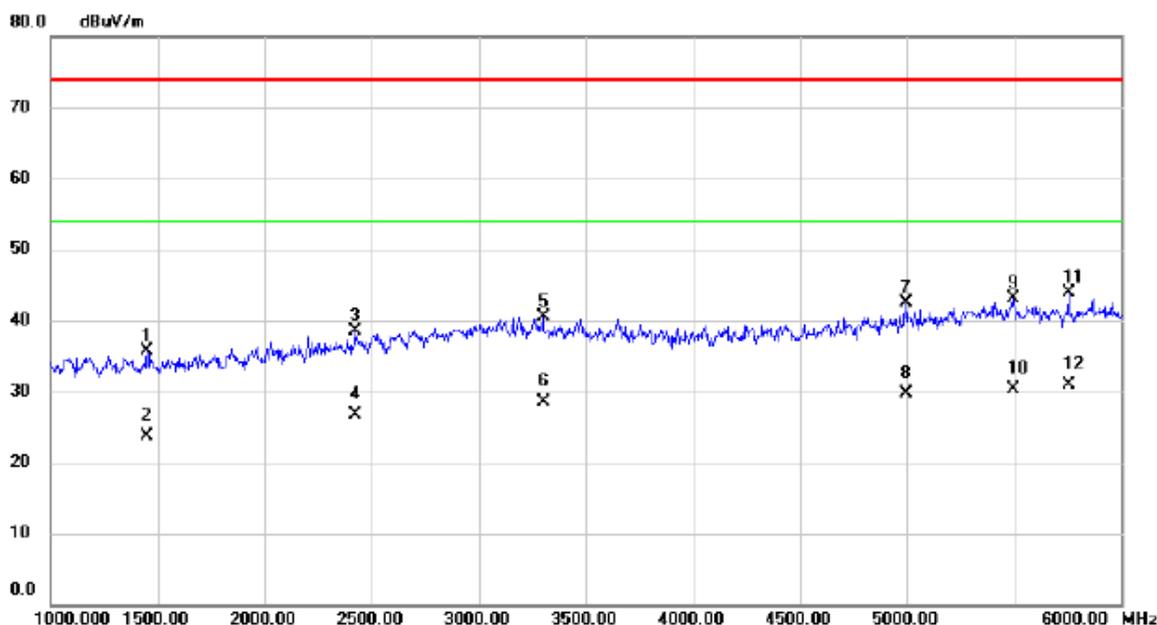

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1452.500	42.79	-7.00	35.79	74.00	-38.21	peak	
2		1452.500	30.71	-7.00	23.71	54.00	-30.29	AVG	
3		2420.000	40.05	-1.51	38.54	74.00	-35.46	peak	
4		2420.000	28.28	-1.51	26.77	54.00	-27.23	AVG	
5		3300.000	39.42	1.17	40.59	74.00	-33.41	peak	
6		3300.000	27.30	1.17	28.47	54.00	-25.53	AVG	
7		4997.500	37.04	5.37	42.41	74.00	-31.59	peak	
8		4997.500	24.40	5.37	29.77	54.00	-24.23	AVG	
9		5497.500	36.07	7.00	43.07	74.00	-30.93	peak	
10		5497.500	23.30	7.00	30.30	54.00	-23.70	AVG	
11		5755.000	36.14	7.77	43.91	74.00	-30.09	peak	
12	*	5755.000	23.05	7.77	30.82	54.00	-23.18	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (WCDMA)
Note:	Adapter: BYD + USB Cable: Luxshare +Battery: SCUD


Horizontal

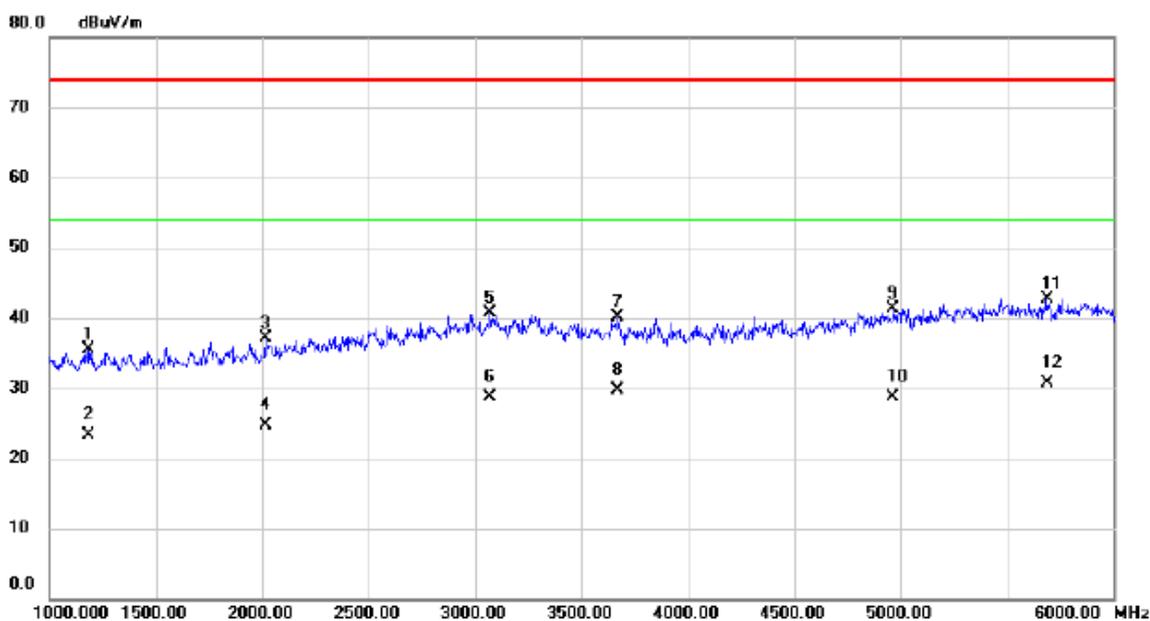

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1185.000	43.27	-7.71	35.56	74.00	-38.44	peak	
2	1185.000	31.11	-7.71	23.40	54.00	-30.60	AVG	
3	2017.500	40.05	-2.97	37.08	74.00	-36.92	peak	
4	2017.500	27.69	-2.97	24.72	54.00	-29.28	AVG	
5	3072.500	39.53	1.20	40.73	74.00	-33.27	peak	
6	3072.500	27.47	1.20	28.67	54.00	-25.33	AVG	
7	3672.500	38.45	1.70	40.15	74.00	-33.85	peak	
8	3672.500	28.03	1.70	29.73	54.00	-24.27	AVG	
9	4965.000	36.04	5.25	41.29	74.00	-32.71	peak	
10	4965.000	23.38	5.25	28.63	54.00	-25.37	AVG	
11	5687.500	35.10	7.57	42.67	74.00	-31.33	peak	
12 *	5687.500	23.06	7.57	30.63	54.00	-23.37	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (LTE)
Note:	Adapter: BYD + USB Cable: Luxshare +Battery: SCUD


Vertical

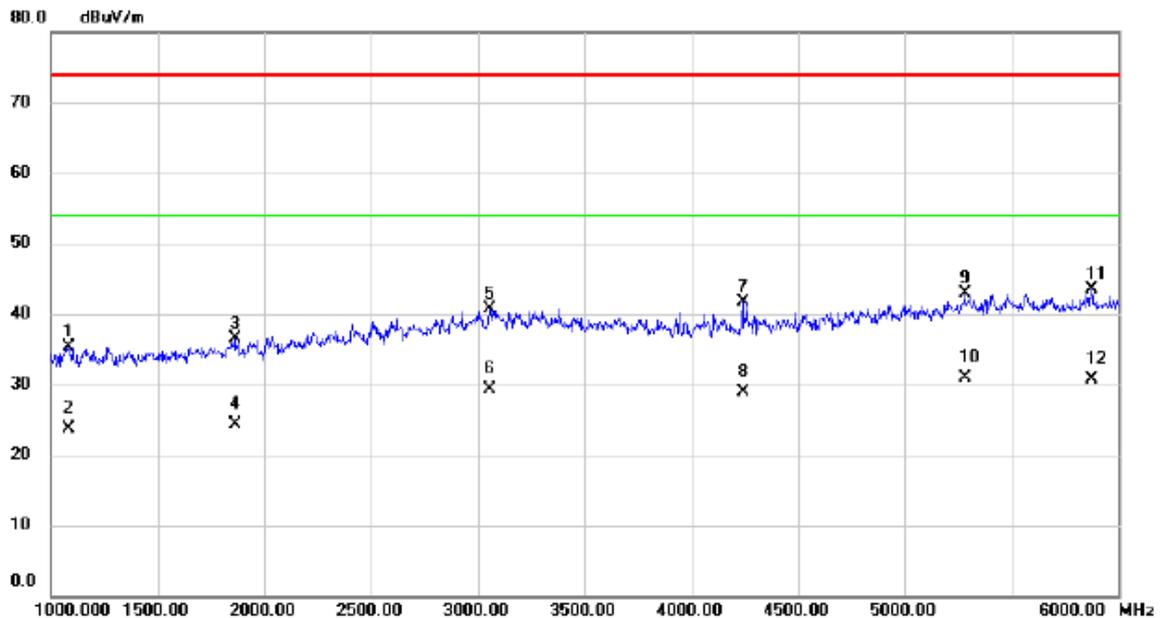

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1082.500	43.32	-7.99	35.33	74.00	-38.67	peak	
2		1082.500	31.78	-7.99	23.79	54.00	-30.21	AVG	
3		1860.000	40.61	-4.11	36.50	74.00	-37.50	peak	
4		1860.000	28.46	-4.11	24.35	54.00	-29.65	AVG	
5		3055.000	39.55	1.20	40.75	74.00	-33.25	peak	
6		3055.000	28.02	1.20	29.22	54.00	-24.78	AVG	
7		4240.000	38.50	3.11	41.61	74.00	-32.39	peak	
8		4240.000	25.78	3.11	28.89	54.00	-25.11	AVG	
9		5282.500	36.63	6.30	42.93	74.00	-31.07	peak	
10	*	5282.500	24.70	6.30	31.00	54.00	-23.00	AVG	
11		5875.000	35.37	8.13	43.50	74.00	-30.50	peak	
12		5875.000	22.50	8.13	30.63	54.00	-23.37	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic (LTE)
Note:	Adapter: BYD + USB Cable: Luxshare +Battery: SCUD


Horizontal

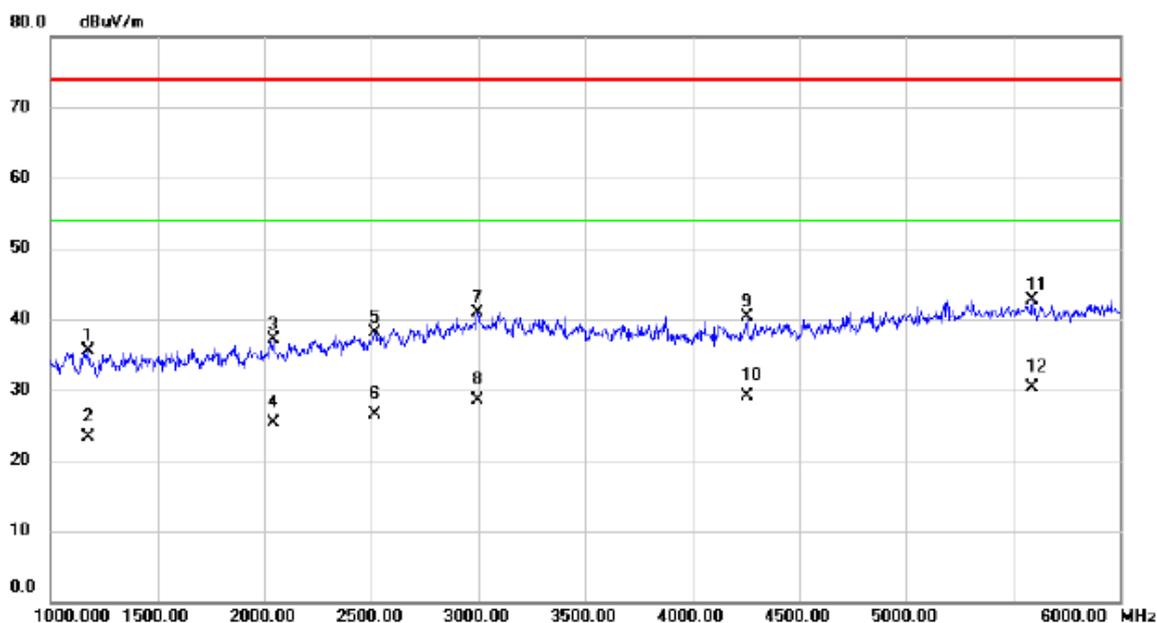

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1177.500	43.14	-7.73	35.41	74.00	-38.59	peak	
2		1177.500	31.11	-7.73	23.38	54.00	-30.62	AVG	
3		2040.000	39.95	-2.89	37.06	74.00	-36.94	peak	
4		2040.000	28.23	-2.89	25.34	54.00	-28.66	AVG	
5		2515.000	39.33	-1.15	38.18	74.00	-35.82	peak	
6		2515.000	27.59	-1.15	26.44	54.00	-27.56	AVG	
7		2995.000	39.72	1.18	40.90	74.00	-33.10	peak	
8		2995.000	27.32	1.18	28.50	54.00	-25.50	AVG	
9		4257.500	37.10	3.12	40.22	74.00	-33.78	peak	
10		4257.500	26.00	3.12	29.12	54.00	-24.88	AVG	
11		5590.000	35.50	7.29	42.79	74.00	-31.21	peak	
12	*	5590.000	23.09	7.29	30.38	54.00	-23.62	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: BYD +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG


Vertical

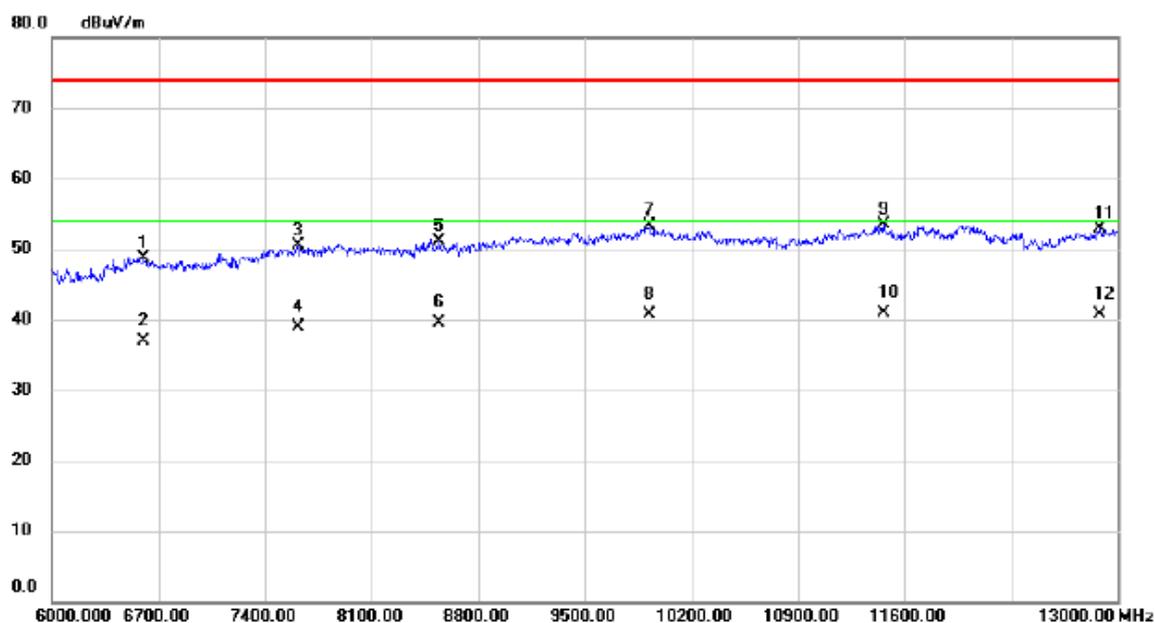

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6602.000	38.35	10.42	48.77	74.00	-25.23	peak	
2	X	6602.000	26.48	10.42	36.90	54.00	-17.10	AVG	
3		7617.000	39.48	11.05	50.53	74.00	-23.47	peak	
4	X	7617.000	27.91	11.05	38.96	54.00	-15.04	AVG	
5		8541.000	39.18	11.99	51.17	74.00	-22.83	peak	
6	X	8541.000	27.54	11.99	39.53	54.00	-14.47	AVG	
7		9927.000	39.82	13.39	53.21	74.00	-20.79	peak	
8	X	9927.000	27.36	13.39	40.75	54.00	-13.25	AVG	
9		11460.00	38.98	14.50	53.48	74.00	-20.52	peak	
10	X	11460.00	26.47	14.50	40.97	54.00	-13.03	AVG	
11		12881.00	36.65	16.20	52.85	74.00	-21.15	peak	
12	X	12881.00	24.54	16.20	40.74	54.00	-13.26	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Note:	Adapter: BYD +USB Cable: Luxshare +Battery: SCUD + Earphone: QUANCHENG

Horizontal

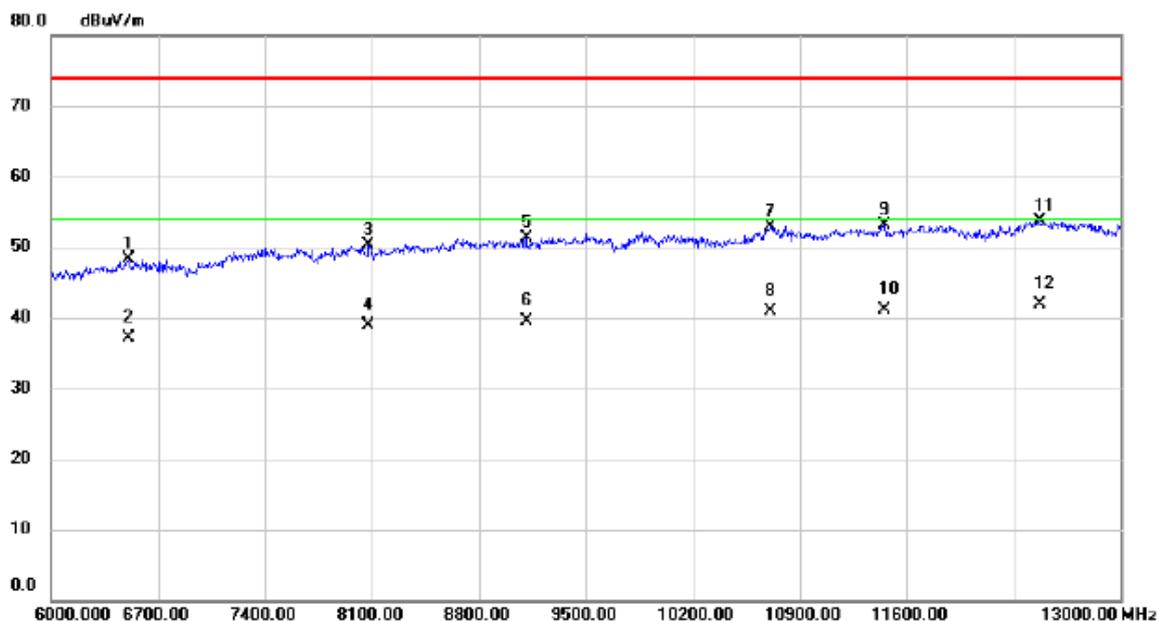

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6511.000	37.92	10.45	48.37	74.00	-25.63	peak	
2		6511.000	26.68	10.45	37.13	54.00	-16.87	AVG	
3		8079.000	39.14	11.11	50.25	74.00	-23.75	peak	
4		8079.000	27.84	11.11	38.95	54.00	-15.05	AVG	
5		9108.000	39.11	12.26	51.37	74.00	-22.63	peak	
6		9108.000	27.26	12.26	39.52	54.00	-14.48	AVG	
7		10711.000	38.35	14.48	52.83	74.00	-21.17	peak	
8		10711.000	26.47	14.48	40.95	54.00	-13.05	AVG	
9		11453.000	38.51	14.51	53.02	74.00	-20.98	peak	
10		11453.000	26.54	14.51	41.05	54.00	-12.95	AVG	
11		12475.000	38.71	15.08	53.79	74.00	-20.21	peak	
12	*	12475.000	26.84	15.08	41.92	54.00	-12.08	AVG	