

**CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 ISSUE 2**

**TEST REPORT**

*For*

**Digital media player**

**MODEL NUMBER: EVG487**

**REPORT NUMBER: 4790747307-RF-1**

**ISSUE DATE: May 6, 2023**

**FCC ID:2A94E-5292**

**IC:29984-5292**

*Prepared for*

**Sam Capetown LLC  
9330 LBJ Freeway, Suite 900, Dallas Texas, 75243 United States**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881  
Fax: +86 769 33244054  
Website: [www.ul.com](http://www.ul.com)**

## Revision History

Rev.	Issue Date	Revisions	Revised By
V0	May 6, 2023	Initial Issue	

## Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	/	FCC 15.203 RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013 Clause 6.2	FCC Part 15.207	Pass
Conducted Output Power	ANSI C63.10-2013 Clause 7.8.5	FCC 15.247 (b) (1) RSS-247 Clause 5.1 (b)	Pass
20 dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013 Clause 6.9.2	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a) RSS-Gen Clause 6.7	Pass
Carrier Hopping Channel Separation	ANSI C63.10-2013 Clause 7.8.2	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (b)	Pass
Number of Hopping Frequency	ANSI C63.10-2013 Clause 7.8.3	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
Time of Occupancy (Dwell Time)	ANSI C63.10-2013 Clause 7.8.4	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
Conducted Bandedge and Spurious Emission	ANSI C63.10-2013 Clause 6.10.4 & Clause 7.8.8	FCC 15.247 (d) RSS-247 Clause 5.5	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013 Clause 6.3 & 6.5 & 6.6	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

\*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

\*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C and ISED RSS-247 ISSUE 2> when <Accuracy Method> decision rule is applied.

## CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>6</b>
<b>2. TEST METHODOLOGY.....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY .....</i>	<i>8</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>9</i>
5.2. <i>CHANNEL LIST .....</i>	<i>9</i>
5.3. <i>MAXIMUM OUTPUT POWER.....</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.5. <i>PACKET TYPE CONFIGURATION.....</i>	<i>10</i>
5.6. <i>WORST-CASE CONFIGURATIONS.....</i>	<i>10</i>
5.7. <i>THE WORSE CASE POWER SETTING PARAMETER .....</i>	<i>11</i>
5.8. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>11</i>
5.9. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>12</i>
<b>6. MEASURING EQUIPMENT AND SOFTWARE USED.....</b>	<b>13</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>15</b>
7.1. <i>CONDUCTED OUTPUT POWER.....</i>	<i>15</i>
7.2. <i>20 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....</i>	<i>16</i>
7.3. <i>CARRIER HOPPING CHANNEL SEPARATION.....</i>	<i>18</i>
7.4. <i>NUMBER OF HOPPING FREQUENCY.....</i>	<i>20</i>
7.5. <i>TIME OF OCCUPANCY (DWELL TIME).....</i>	<i>22</i>
7.6. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSION.....</i>	<i>24</i>
7.7. <i>DUTY CYCLE .....</i>	<i>26</i>
<b>8. RADIATED TEST RESULTS.....</b>	<b>27</b>
8.1. <i>RESTRICTED BANDEDGE .....</i>	<i>36</i>
8.2. <i>SPURIOUS EMISSIONS (1 GHZ ~ 3 GHZ) .....</i>	<i>45</i>
8.3. <i>SPURIOUS EMISSIONS (3 GHZ ~ 18 GHZ) .....</i>	<i>51</i>
8.4. <i>SPURIOUS EMISSIONS (9 KHZ ~ 30 MHZ).....</i>	<i>69</i>
8.5. <i>SPURIOUS EMISSIONS (18 GHZ ~ 26 GHZ) .....</i>	<i>72</i>
8.6. <i>SPURIOUS EMISSIONS (30 MHZ ~ 1 GHZ) .....</i>	<i>74</i>

<b>9. AC POWER LINE CONDUCTED EMISSION .....</b>	<b>76</b>
<b>10. ANTENNA REQUIREMENT .....</b>	<b>80</b>
<b>11. TEST DATA.....</b>	<b>81</b>
11.1. <i>APPENDIX A: 20 DB BANDWIDTH</i> .....	81
11.1.1. Test Result.....	81
11.1.2. Test Graphs .....	82
11.2. <i>APPENDIX B: 99% OCCUPIED BANDWIDTH</i> .....	85
11.2.1. Test Result.....	85
11.2.2. Test Graphs .....	86
11.3. <i>APPENDIX C: MAXIMUM PEAK CONDUCTED OUTPUT POWER</i> .....	89
11.3.1. Test Result.....	89
11.4. <i>APPENDIX D: CARRIER FREQUENCY SEPARATION</i> .....	90
11.4.1. Test Result.....	90
11.4.2. Test Graphs .....	91
11.5. <i>APPENDIX E: TIME OF OCCUPANCY</i> .....	92
11.5.1. Test Result.....	92
11.5.2. Test Graphs .....	93
11.6. <i>APPENDIX F: NUMBER OF HOPPING CHANNELS</i> .....	96
11.6.1. Test Result.....	96
11.6.2. Test Graphs .....	97
11.7. <i>APPENDIX G: BAND EDGE MEASUREMENTS</i> .....	98
11.7.1. Test Result.....	98
11.7.2. Test Graphs .....	99
11.8. <i>APPENDIX H: CONDUCTED SPURIOUS EMISSION</i> .....	103
11.8.1. Test Result.....	103
11.8.2. Test Graphs .....	104
11.9. <i>APPENDIX I: DUTY CYCLE</i> .....	113
11.9.1. Test Result.....	113
11.9.2. Test Graphs .....	114

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: Sam Capetown LLC  
Address: 9330 LBJ Freeway, Suite 900, Dallas Texas, 75243 United States


Company Name: Sam Capetown LLC  
Address: 9330 LBJ Freeway, Suite 900, Dallas Texas, 75243 United States

### EUT Information

EUT Name: Digital media player  
Model: EVG487  
Sample Received Date: April 19, 2023  
Sample ID: 6023675  
Date of Tested: April 19, 2023 to May 5, 2023

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 ISSUE 2	PASS

Prepared By:



Denny Huang

Senior Project Engineer

Checked By:



Kebo Zhang

Senior Project Engineer

Approved By:



Stephen Guo

Operations Manager

## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 ISSUE 2, KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01  
Radiated Test Site v01r01, CFR 47 FCC Part 2, ANSI C63.10-2013 and ISED RSS-GEN Issue 5.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.</p> <p>Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

### Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

### Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

### Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz) 5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
20dB Emission Bandwidth and 99% Occupied Bandwidth	±0.0196%
Carrier Frequency Separation	±1.9%
Maximum Conducted Output Power	±0.743 dB
Number of Hopping Channel	±1.9%
Time of Occupancy	±0.028%
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz) ±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	Digital media player		
Model	EVG487		
Technology	Bluetooth – BR & EDR		
Transmit Frequency Range	2402 MHz ~ 2480 MHz		
Mode	Basic Rate	Enhanced Data Rate	
Modulation	GFSK	$\Pi/4$ -DQPSK	8DPSK
Packet Type (Maximum Payload):	DH5	2DH5	3DH5
Data Rate	1 Mbps	2 Mbps	3 Mbps
Ratings	AC 120 V, 60 Hz		

### 5.2. CHANNEL LIST

Channel	Frequency (MHz)						
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

### 5.3. MAXIMUM OUTPUT POWER

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)
GFSK	2402 ~ 2480	0-78[79]	5.34
$\Pi/4$ -DQPSK	2402 ~ 2480	0-78[79]	6.05
8DPSK	2402 ~ 2480	0-78[79]	6.46

## 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK-DH5	CH 00(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
$\Pi/4$ -DQPSK-2DH5	CH 00(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
8DPSK-3DH5	CH 00(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
GFSK-DH5	Hopping	
$\Pi/4$ -DQPSK-2DH5	Hopping	
8DPSK-3DH5	Hopping	

## 5.5. PACKET TYPE CONFIGURATION

Test Mode	Packet Type	Setting (Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
$\Pi/4$ -DQPSK	2-DH1	54
	2-DH3	367
	2-DH5	679
8DPSK	3-DH1	83
	3-DH3	552
	3-DH5	1021

## 5.6. WORST-CASE CONFIGURATIONS

Test Mode	Modulation Technology	Modulation Type	Data Rate	Packet Type
BR	FHSS	GFSK	1Mbit/s	DH5
EDR	FHSS	$\Pi/4$ -DQPSK	2Mbit/s	2-DH5
EDR	FHSS	8DPSK	3Mbit/s	3-DH5

## 5.7. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5 MHz Band				
Test Software		BT FCC Tool		
Test Mode	Transmit Antenna Number	Test Software Setting Value		
		CH 00	CH 39	CH 78
GFSK	1	4	4	4
$\pi/4$ -DQPSK	1	4	4	4
8DPSK	1	4	4	4

## 5.8. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	Maximum Antenna Gain (dBi)
1	2402 ~ 2480	PCB	2.45

Test Mode	Transmit and Receive Mode	Description
GFSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
$\pi/4$ -DQPSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
8DPSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.

## 5.9. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	XIAOXIN 5000	/

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	AC	/	/	1	/
2	USB	USB	/	/	/
3	HDMI	HDMI	/	1	/
4	Optical	Optical	/	1	/


### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

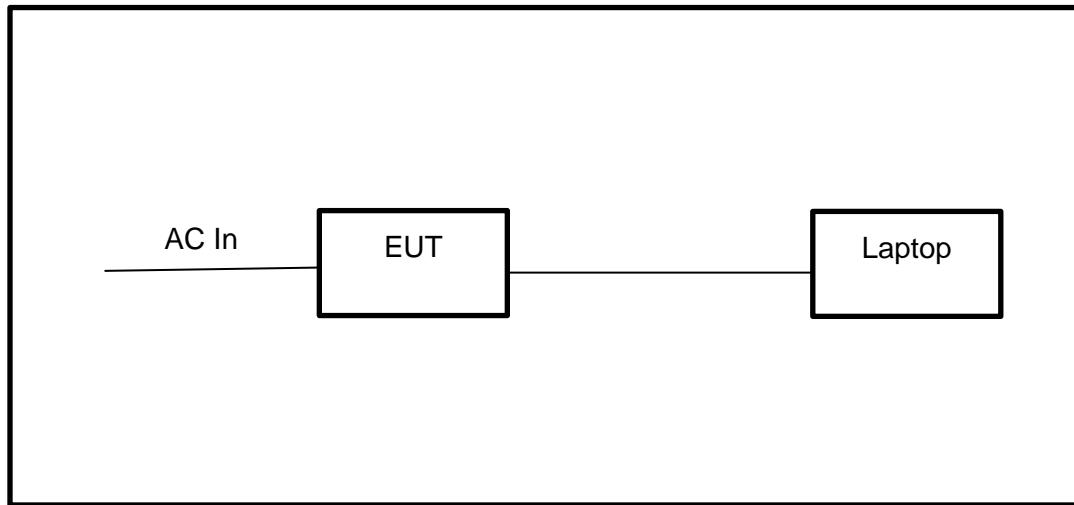

## 6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.31,2023	Mar.30,2024
Vector Signal Generator	R&S	SMBV100A	261637	Oct.17, 2022	Oct.16, 2023
Signal Generator	R&S	SMB100A	178553	Oct.17, 2022	Oct.16, 2023
Signal Analyzer	R&S	FSV40	101118	Oct.17, 2022	Oct.16, 2023
Software					
Description	Manufacturer	Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.17, 2022	Oct.16, 2023
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.17, 2022	Oct.16, 2023
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.17, 2022	Oct.16, 2023
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.17, 2022	Oct.16, 2023
Attenuator	Agilent	8495B	2814a12853	Oct.18, 2022	Oct.17, 2023
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.17, 2022	Oct.16, 2023
Two-Line V-Network	R&S	ENV216	101983	Oct.17, 2022	Oct.16, 2023
Software					
Description		Manufacturer		Name	Version
Test Software for Conducted Emissions		Farad		EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.17, 2022	Oct.16, 2023
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.17, 2022	Oct.16, 2023
EMI Measurement Receiver	R&S	ESR26	101377	Oct.17, 2022	Oct.16, 2023
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.17, 2022	Oct.16, 2023
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.17, 2022	Oct.16, 2023
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.17, 2022	Oct.16, 2023
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.17, 2022	Oct.16, 2023
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01202035	Oct.17, 2022	Oct.16, 2023
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	/	/
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	/	/
Software					
Description		Manufacturer		Name	Version
Test Software for Radiated Emissions		Farad		EZ-EMC	Ver. UL-3A1

## 7. ANTENNA PORT TEST RESULTS

### 7.1. CONDUCTED OUTPUT POWER

#### LIMITS


CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (1) ISED RSS-247 Clause 5.4 (b)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel: 1 watt or 30 dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel: 125 mW or 21 dBm	2400-2483.5

#### TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	25.2 °C	Relative Humidity	54.3%
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

#### TEST RESULTS

Please refer to section "Test Data" - Appendix C

## 7.2. 20 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

### LIMITS

CFR 47FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a)	20 dB Bandwidth	None; for reporting purposes only.	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	None; for reporting purposes only.	2400-2483.5

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 6.9.2.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Bandwidth: 1 % to 5 % of the 20 dB bandwidth For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 20 dB Bandwidth: approximately $3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Span	Approximately 2 to 3 times the 20dB bandwidth
Trace	Max hold
Sweep	Auto couple

a) Use the occupied bandwidth function of the instrument, allow the trace to stabilize and report the measured 99 % occupied bandwidth and 20 dB Bandwidth.

### TEST SETUP

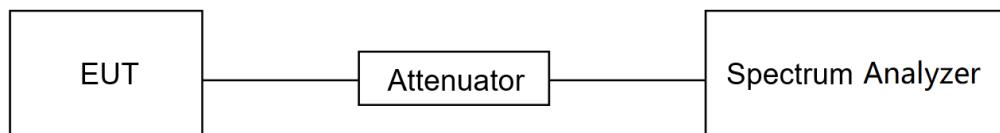

### TEST ENVIRONMENT

Temperature	25.2 °C	Relative Humidity	54.3%
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

**TEST RESULTS**

Please refer to section "Test Data" - Appendix A & B

### 7.3. CARRIER HOPPING CHANNEL SEPARATION

#### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) ISED RSS-247 Clause 5.1 (b)	Carrier Frequency Separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.	2400-2483.5

#### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	$\geq$ RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize and use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

#### TEST SETUP

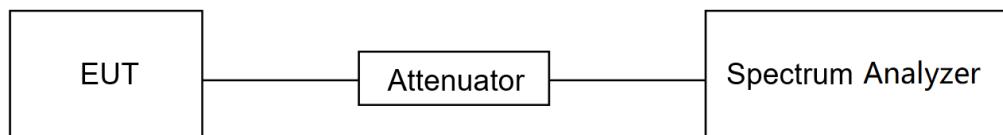

**TEST ENVIRONMENT**

Temperature	25.2 °C	Relative Humidity	54.3%
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

**TEST RESULTS**

Please refer to section "Test Data" - Appendix D

## 7.4. NUMBER OF HOPPING FREQUENCY

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Number of Hopping Frequency	at least 15 hopping channels

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 7.8.3.

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	$\geq$ RBW
Span	The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer, count the quantity of peaks to get the number of hopping channels.

### TEST SETUP

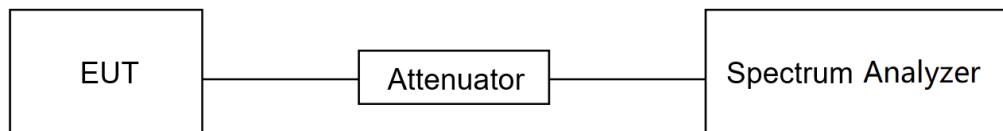

### TEST ENVIRONMENT

Temperature	25.2 °C	Relative Humidity	54.3%
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

**TEST RESULTS**

Please refer to section "Test Data" - Appendix F

## 7.5. TIME OF OCCUPANCY (DWELL TIME)

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.4.

Connect the EUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1 MHz
VBW	$\geq$ RBW
Span	Zero span, centered on a hopping channel
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel

Use the marker-delta function to determine the transmit time per hop (Burst Width). If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

For FHSS Mode (79 Channel):

DH1/3DH1 Dwell Time:  $\text{Burst Width} * (1600/2) * 31.6 / (\text{channel number})$

DH3/3DH3 Dwell Time:  $\text{Burst Width} * (1600/4) * 31.6 / (\text{channel number})$


DH5/3DH5 Dwell Time:  $\text{Burst Width} * (1600/6) * 31.6 / (\text{channel number})$

For AFHSS Mode (20 Channel):

DH1/3DH1 Dwell Time:  $\text{Burst Width} * (800/2) * 8 / (\text{channel number})$

DH3/3DH3 Dwell Time:  $\text{Burst Width} * (800/4) * 8 / (\text{channel number})$

DH5/3DH5 Dwell Time:  $\text{Burst Width} * (800/6) * 8 / (\text{channel number})$

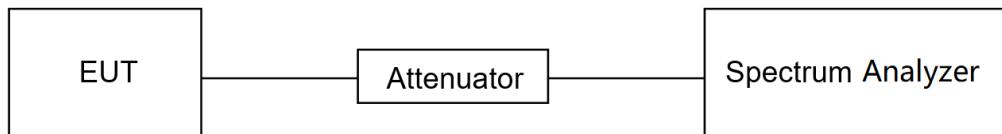**TEST SETUP****TEST ENVIRONMENT**

Temperature	25.2 °C	Relative Humidity	54.3%
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

**TEST RESULTS**

Please refer to section "Test Data" - Appendix E

## 7.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSION

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.6 and 7.8.8.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
measurement points	$\geq$ span/RBW
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum

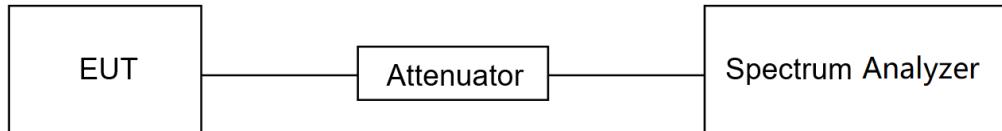**TEST SETUP****TEST ENVIRONMENT**

Temperature	25.2 °C	Relative Humidity	54.3%
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

**TEST RESULTS**

Please refer to section "Test Data" - Appendix G & H

## 7.7. DUTY CYCLE


### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 Zero – Span Spectrum Analyzer method.

### TEST SETUP

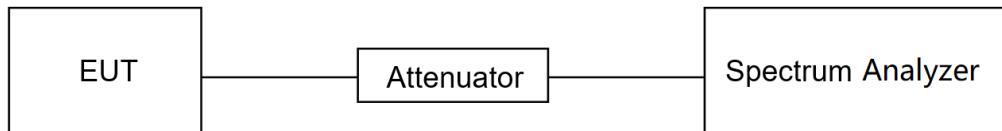

### TEST ENVIRONMENT

Temperature	25.2 °C	Relative Humidity	54.3%
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

### TEST RESULTS

Please refer to section "Test Data" - Appendix I

## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100		40
88 - 216	150		43.5
216 - 960	200		46
Above 960	500		54
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ( $\mu$ A/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands <sup>Note 1</sup>		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.877 - 5.883	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7260 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

## TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency X KHz resulted in a level of Y dB<sub>V</sub>/m, which is equivalent to  $Y - 51.5 = Z$  dB<sub>A</sub>/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

## Above 1 GHz

## The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.7. ON TIME AND DUTY CYCLE.

Note: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.7.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.7.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.7.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes, channels and antennas have been tested, only the worst data was recorded in the report.


## TEST SETUP

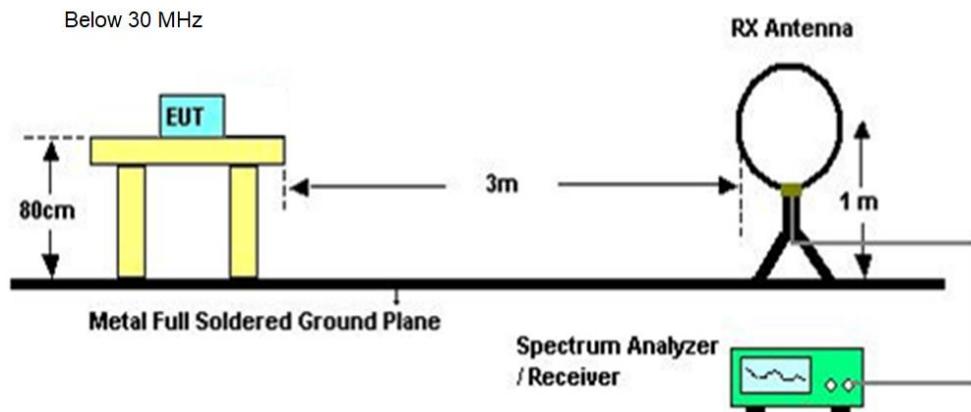

Below 1 GHz and above 30 MHz

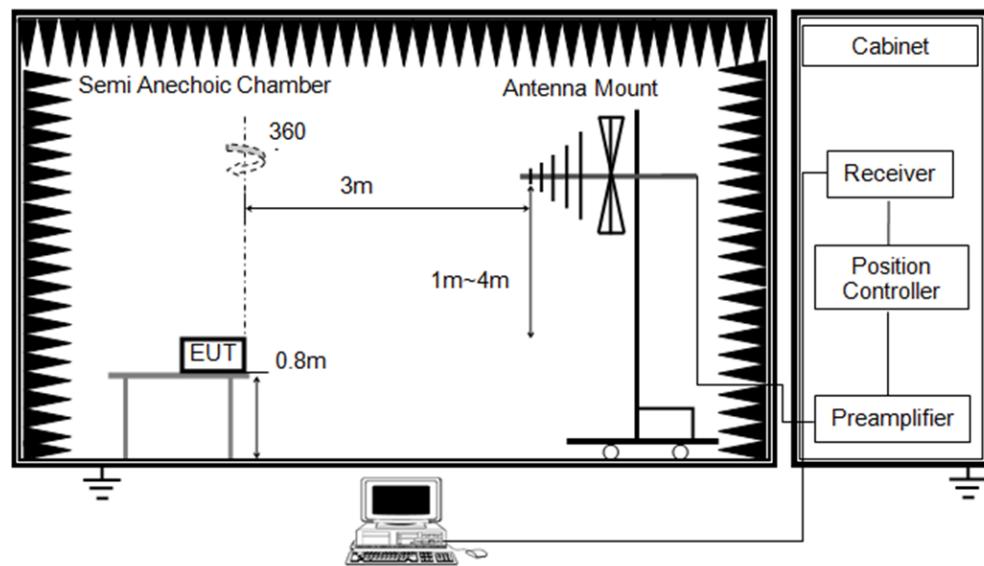

Above 1 GHz

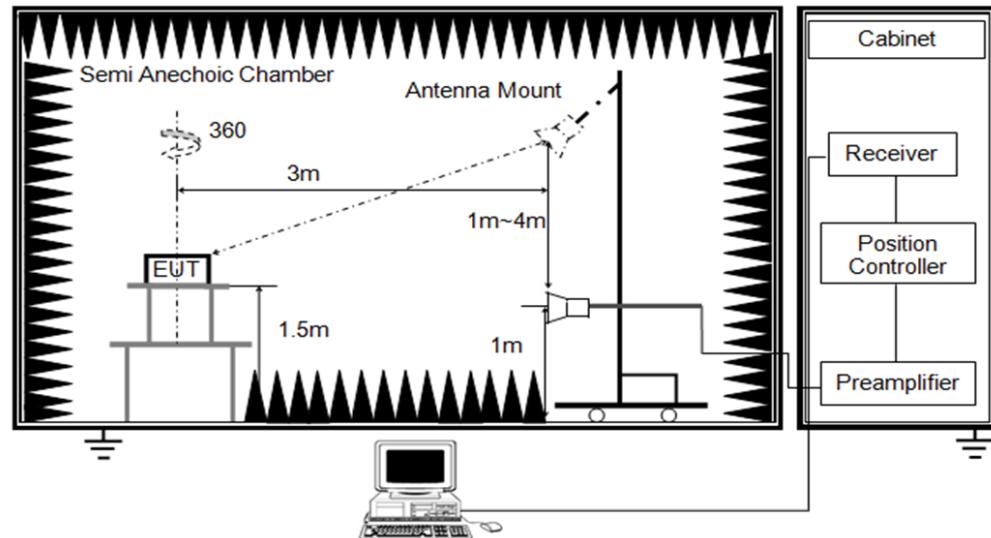


**TEST ENVIRONMENT**

Temperature	24.6 °C	Relative Humidity	55.2%
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

**TEST RESULTS**


## 8.1. RESTRICTED BANDEDGE

Test Mode:	GFSK Peak	Channel:	2402 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

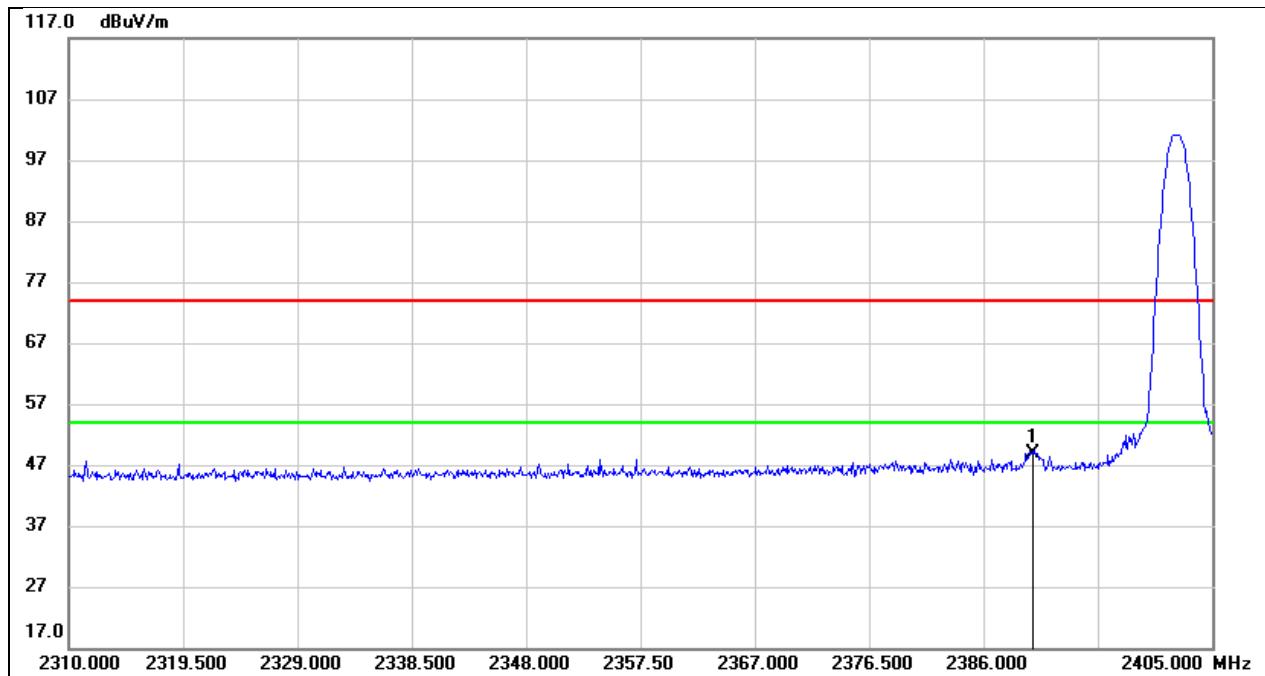


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	16.62	32.16	48.78	74.00	-25.22	peak

Test Mode:	GFSK Peak	Channel:	2480 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

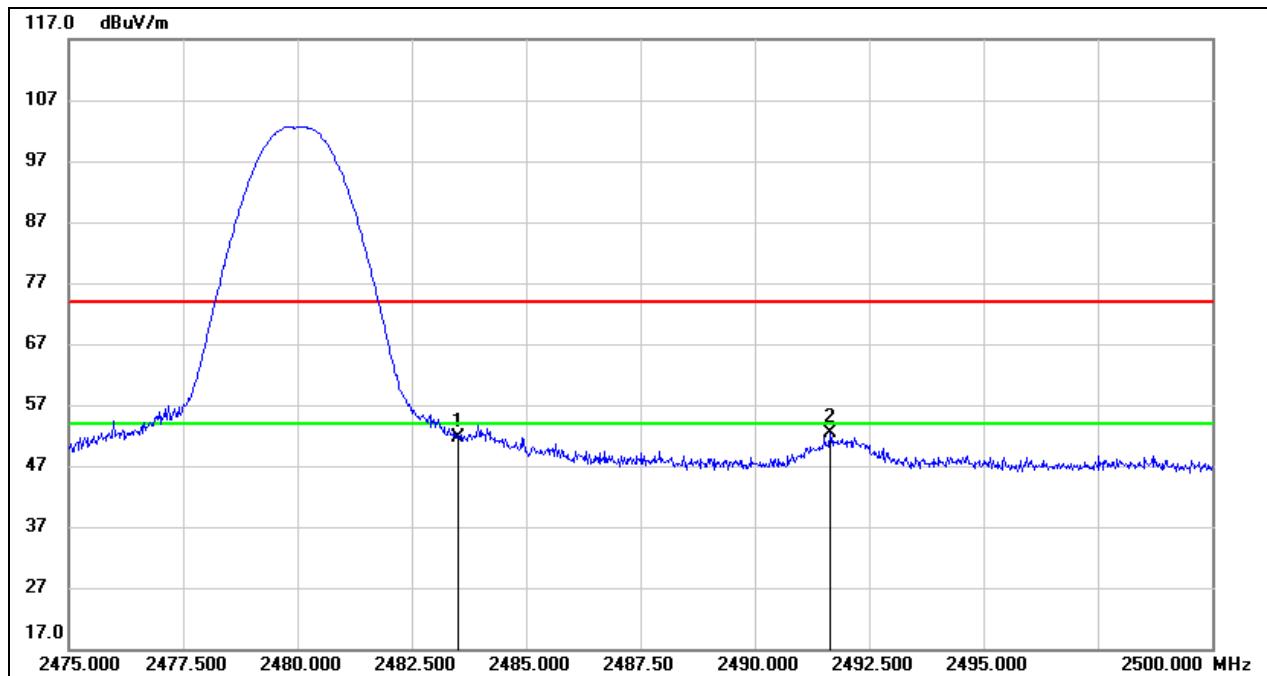


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.28	32.44	51.72	74.00	-22.28	peak
2	2491.650	19.85	32.47	52.32	74.00	-21.68	peak

Test Mode:	GFSK Average	Channel:	2480 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

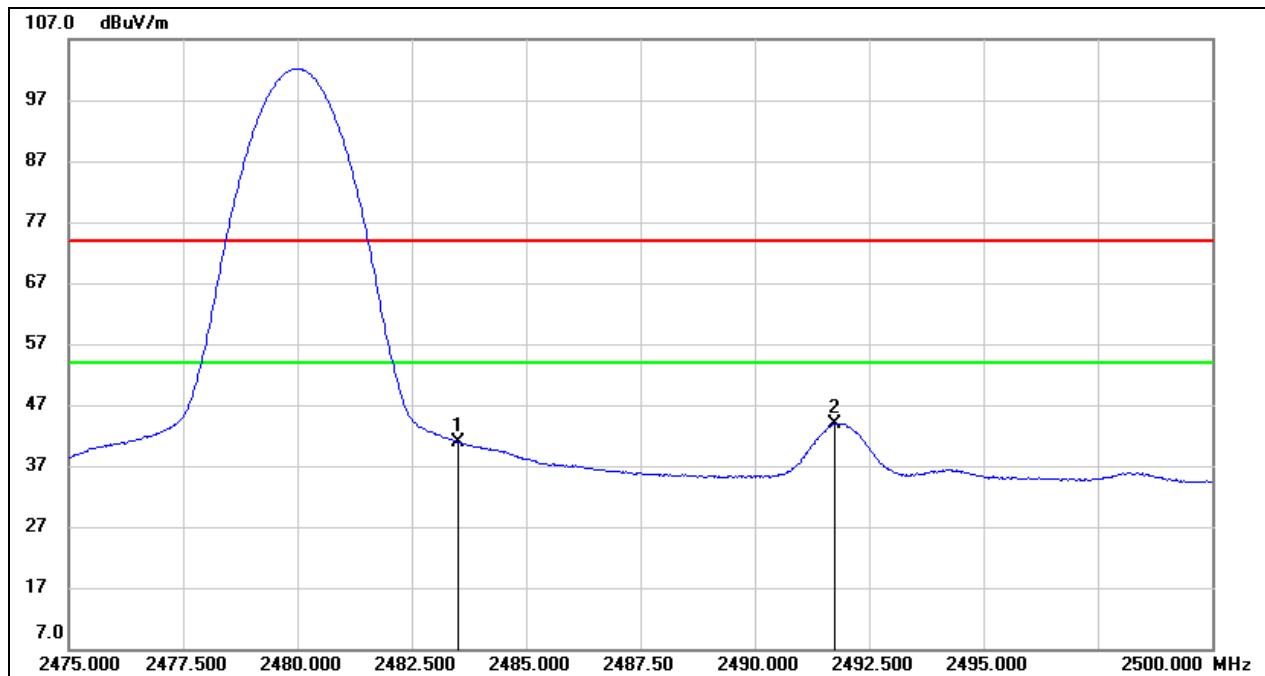


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	8.44	32.44	40.88	54.00	-13.12	AVG
2	2491.750	11.48	32.47	43.95	54.00	-10.05	AVG

Test Mode:	π/4-DQPSK Peak	Channel:	2402 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

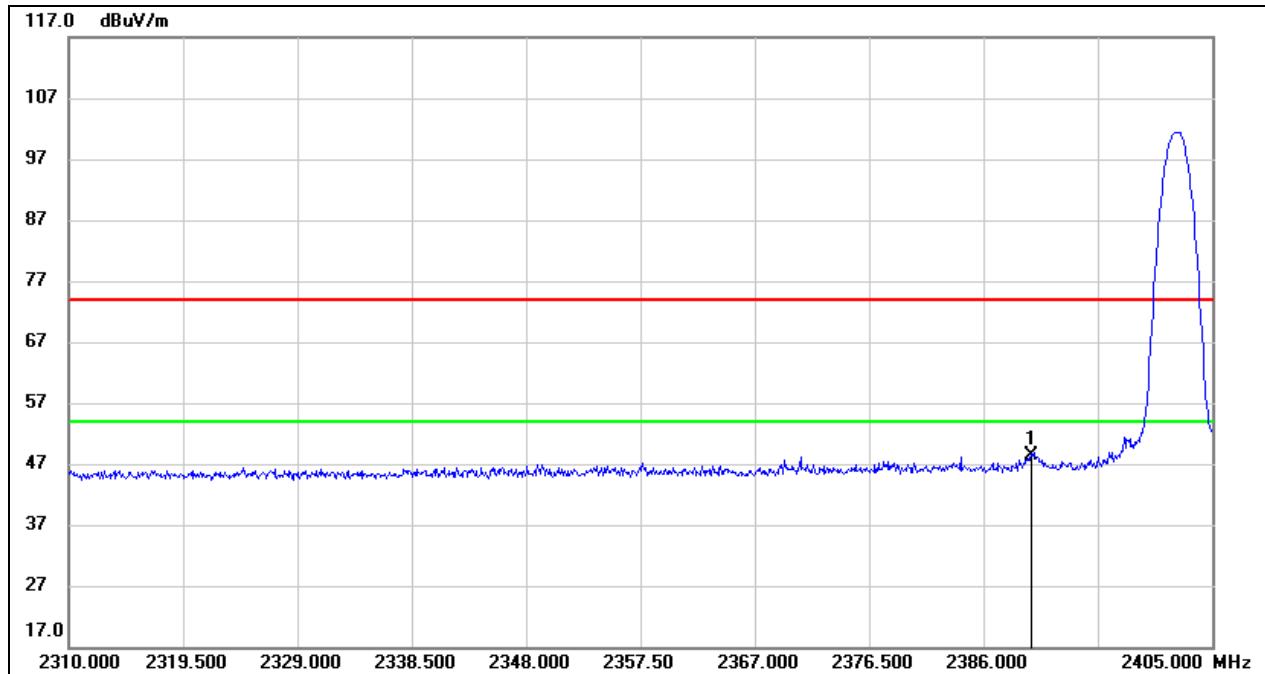


No.	Frequency (MHz)	Reading (dB <sub>UV</sub> )	Correct (dB/m)	Result (dB <sub>UV</sub> /m)	Limit (dB <sub>UV</sub> /m)	Margin (dB)	Remark
1	2390.000	16.24	32.16	48.40	74.00	-25.60	peak

Test Mode:	$\pi/4$ -DQPSK Peak	Channel:	2480 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

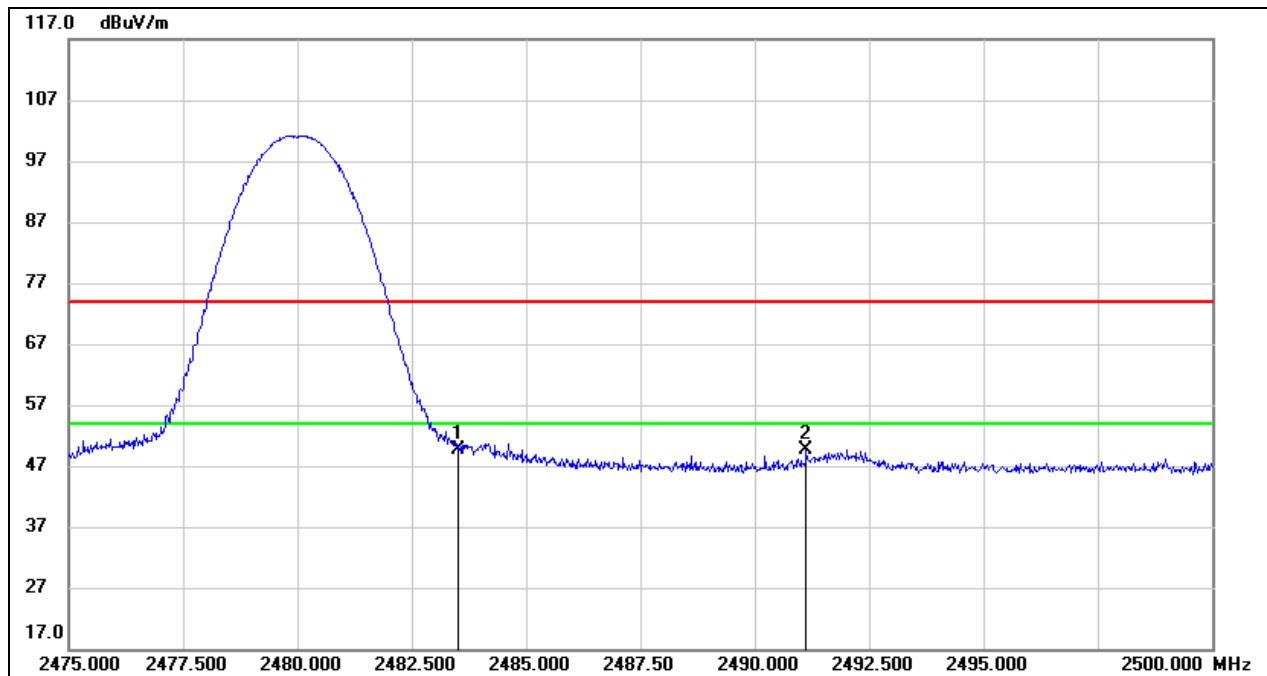


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.23	32.44	49.67	74.00	-24.33	peak
2	2491.125	17.04	32.47	49.51	74.00	-24.49	peak

Test Mode:	Π/4-DQPSK Average	Channel:	2480 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

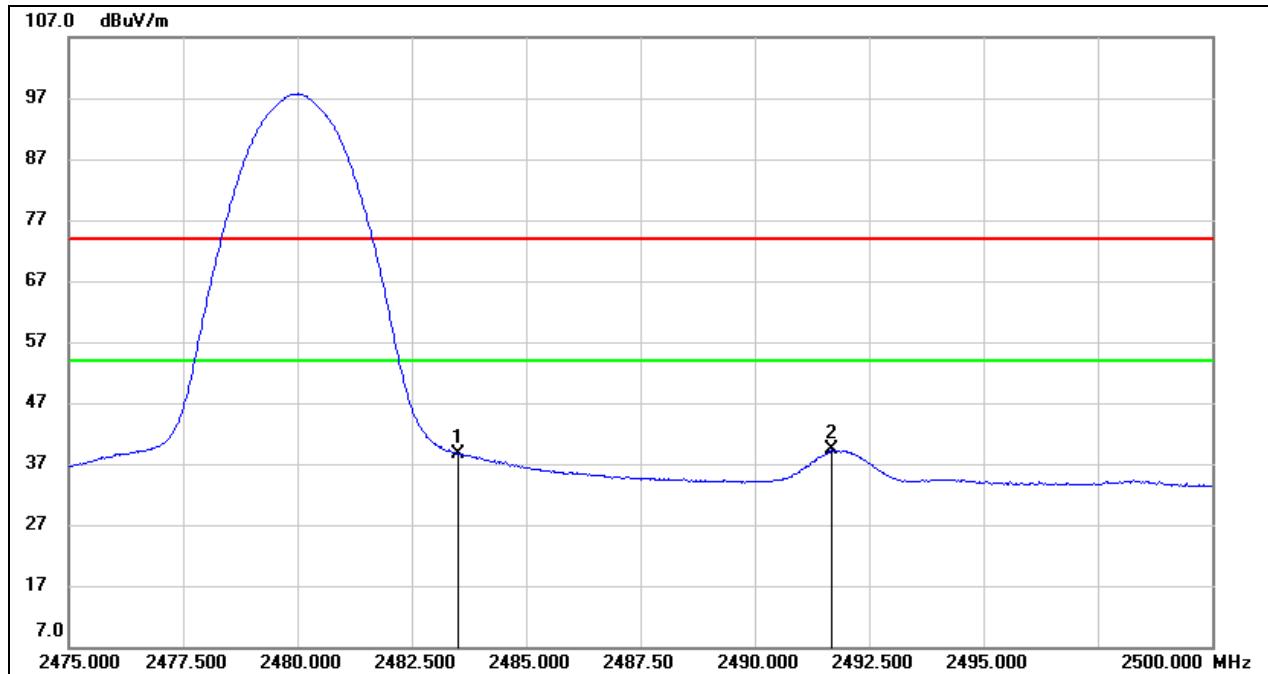


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	6.21	32.44	38.65	54.00	-15.35	AVG
2	2491.675	6.80	32.47	39.27	54.00	-14.73	AVG

Test Mode:	8DPSK Peak	Channel:	2402 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

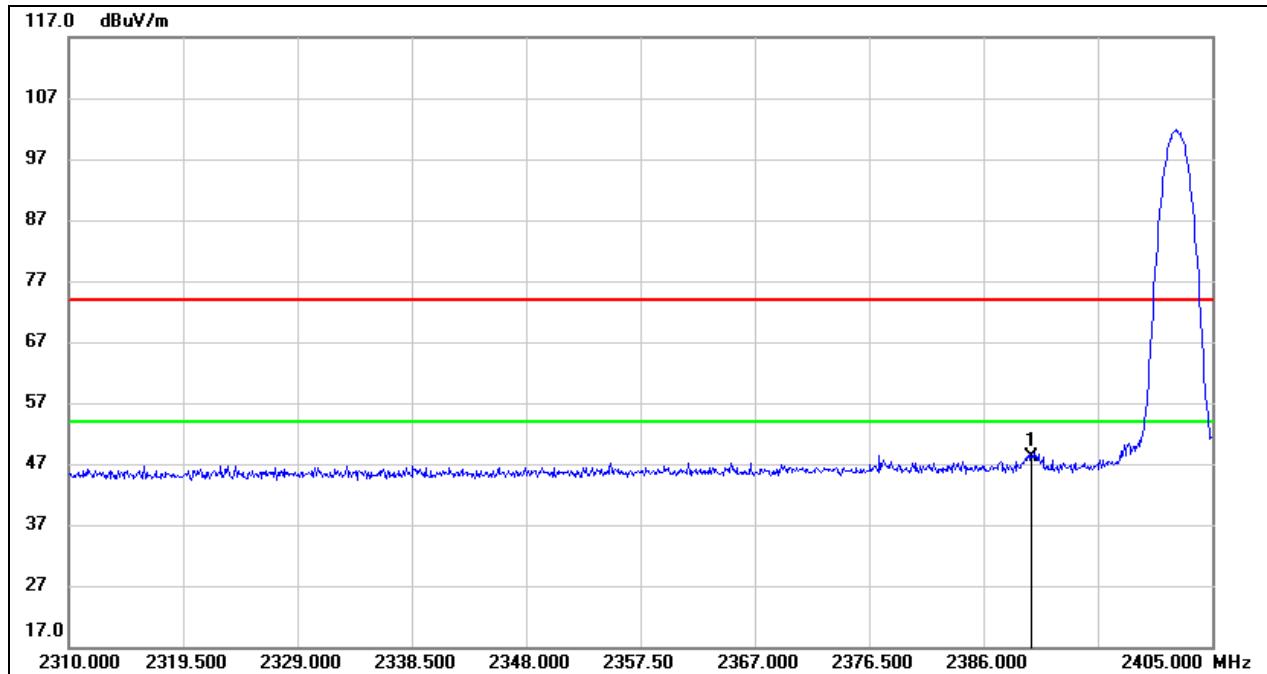


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	15.86	32.16	48.02	74.00	-25.98	peak

Test Mode:	8DPSK Peak	Channel:	2480 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

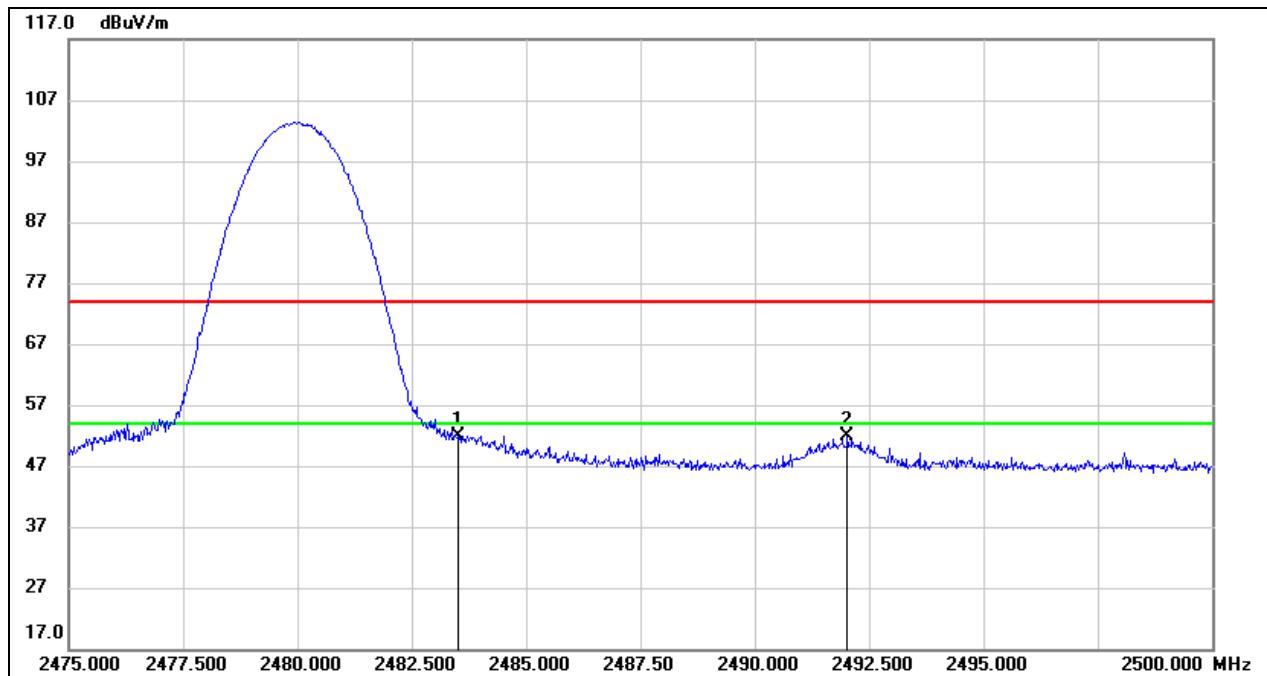

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.32	32.44	51.76	74.00	-22.24	peak
2	2492.025	19.36	32.47	51.83	74.00	-22.17	peak


Test Mode:	8DPSK Average	Channel:	2480 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

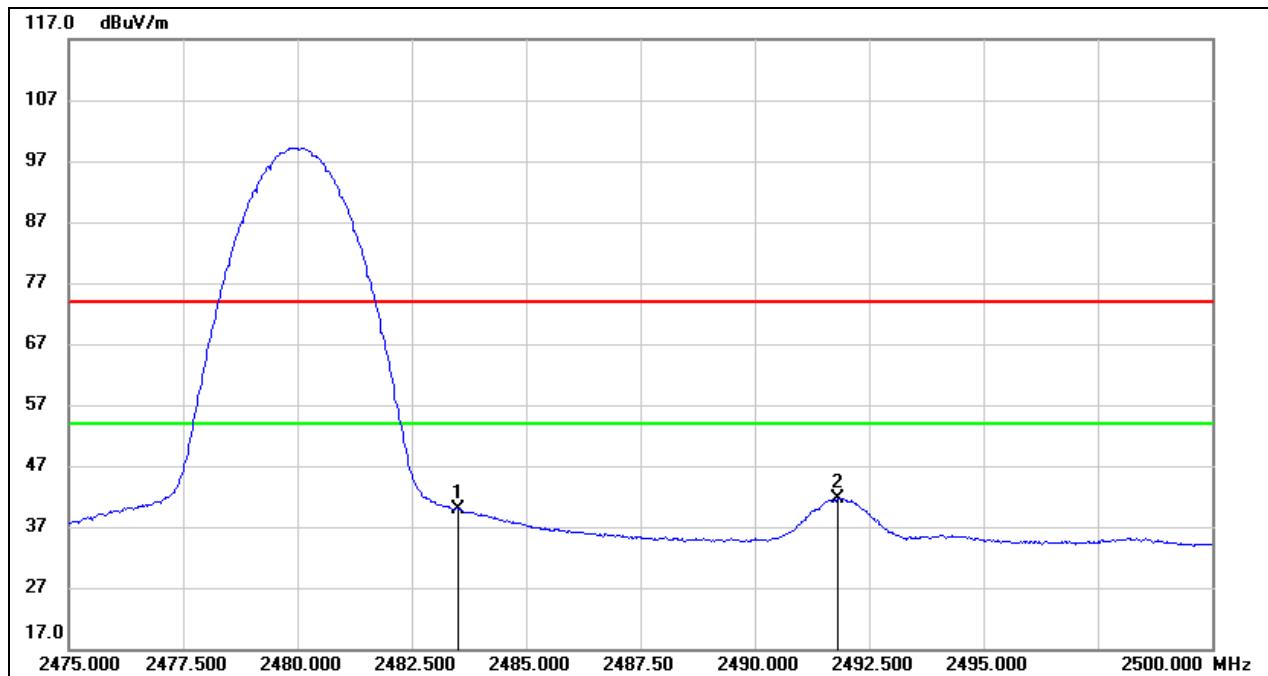

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	7.45	32.44	39.89	54.00	-14.11	AVG
2	2491.825	9.24	32.47	41.71	54.00	-12.29	AVG


## 8.2. SPURIOUS EMISSIONS (1 GHZ ~ 3 GHZ)

Test Mode:	8DPSK	Channel:	2402 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

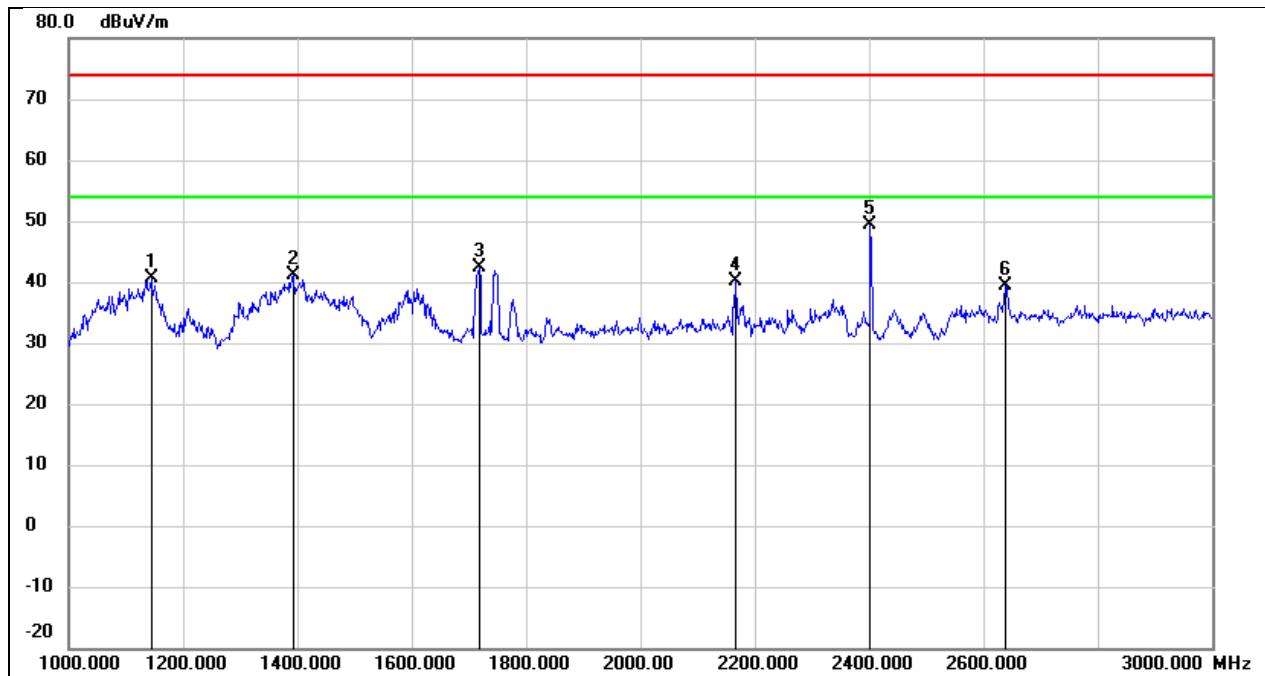


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1144.000	54.87	-14.36	40.51	74.00	-33.49	peak
2	1392.000	54.43	-13.21	41.22	74.00	-32.78	peak
3	1718.000	54.32	-11.99	42.33	74.00	-31.67	peak
4	2166.000	50.33	-10.20	40.13	74.00	-33.87	peak
5	2402.000	58.41	-8.99	49.42	/	/	Fundamental
6	2638.000	47.54	-8.07	39.47	74.00	-34.53	peak

Test Mode:	8DPSK	Channel:	2402 MHz
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

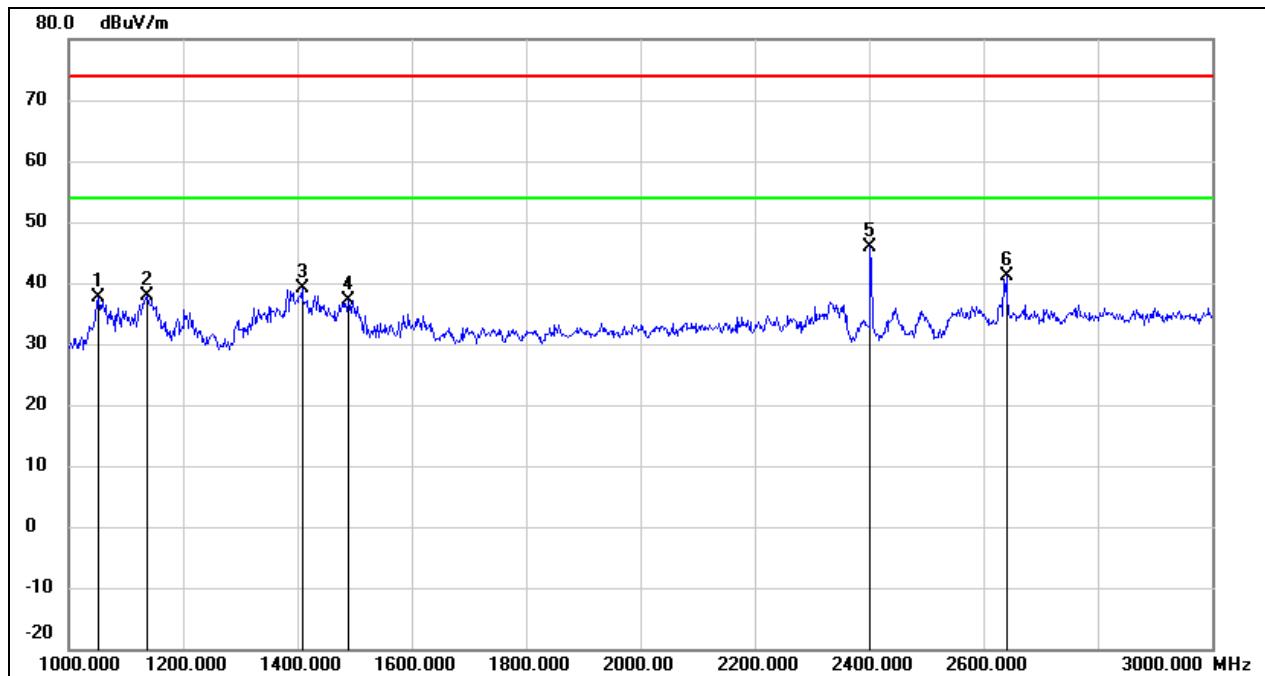


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1052.000	52.38	-14.79	37.59	74.00	-36.41	peak
2	1138.000	52.33	-14.39	37.94	74.00	-36.06	peak
3	1408.000	52.20	-13.13	39.07	74.00	-34.93	peak
4	1490.000	49.87	-12.75	37.12	74.00	-36.88	peak
5	2402.000	54.88	-8.99	45.89	/	/	Fundamental
6	2640.000	49.32	-8.07	41.25	74.00	-32.75	peak

Test Mode:	8DPSK	Channel:	2441 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

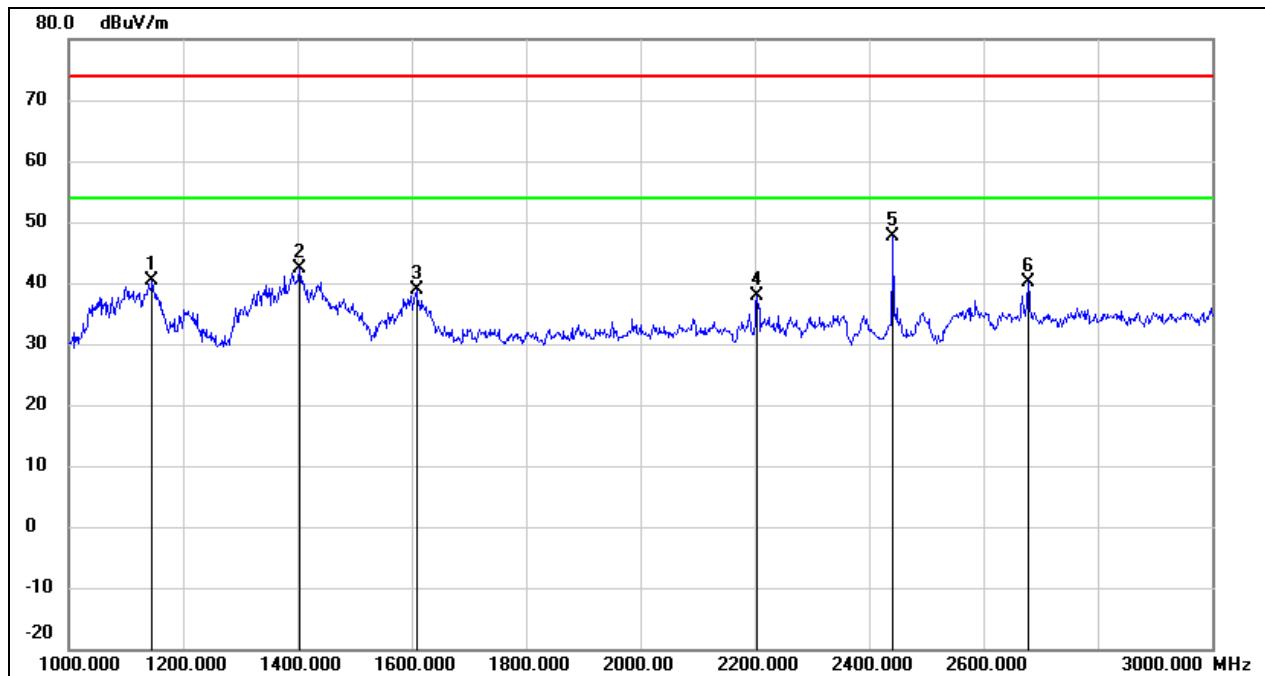


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1146.000	54.80	-14.35	40.45	74.00	-33.55	peak
2	1404.000	55.45	-13.16	42.29	74.00	-31.71	peak
3	1608.000	51.15	-12.35	38.80	74.00	-35.20	peak
4	2204.000	47.90	-10.01	37.89	74.00	-36.11	peak
5	2441.000	56.48	-8.79	47.69	/	/	Fundamental
6	2678.000	48.21	-7.96	40.25	74.00	-33.75	peak

Test Mode:	8DPSK	Channel:	2441 MHz
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

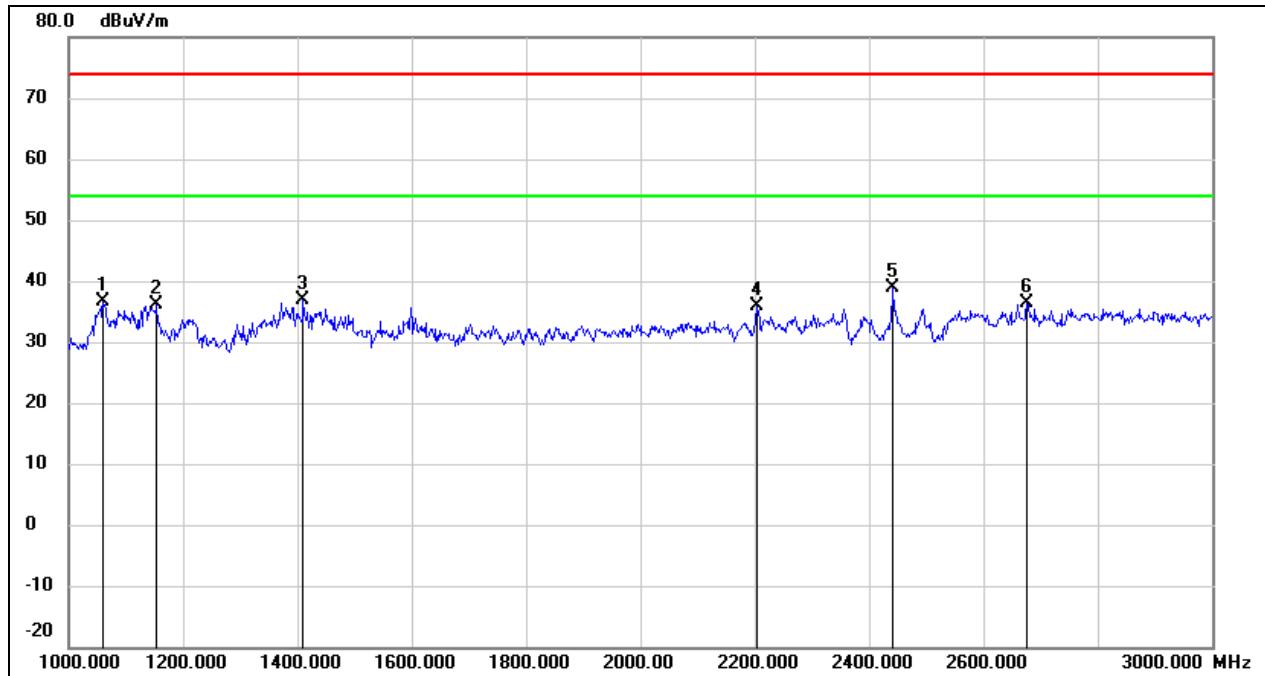


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1060.000	51.33	-14.76	36.57	74.00	-37.43	peak
2	1154.000	50.51	-14.32	36.19	74.00	-37.81	peak
3	1410.000	50.07	-13.13	36.94	74.00	-37.06	peak
4	2204.000	45.99	-10.01	35.98	74.00	-38.02	peak
5	2441.000	47.76	-8.79	38.97	/	/	Fundamental
6	2676.000	44.45	-7.96	36.49	74.00	-37.51	peak

Test Mode:	8DPSK	Channel:	2480 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

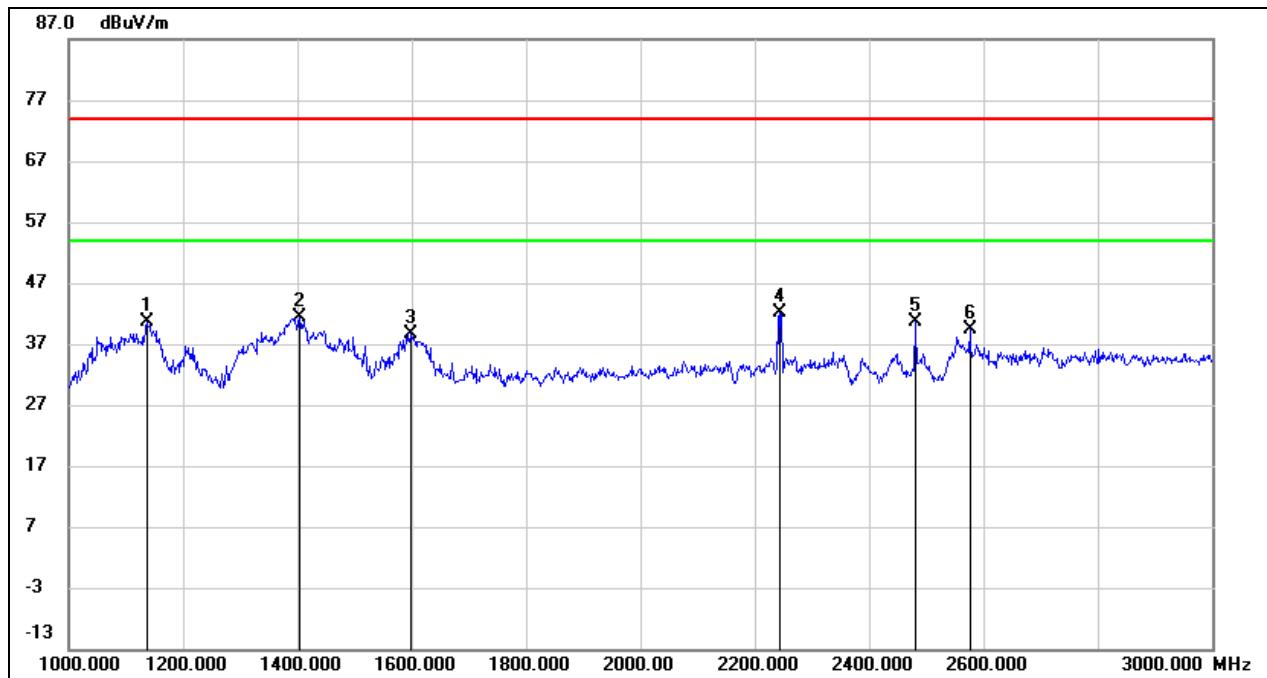

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1136.000	55.03	-14.40	40.63	74.00	-33.37	peak
2	1404.000	54.62	-13.16	41.46	74.00	-32.54	peak
3	1598.000	51.11	-12.38	38.73	74.00	-35.27	peak
4	2244.000	51.83	-9.81	42.02	74.00	-31.98	peak
5	2480.000	49.30	-8.59	40.71	/	/	Fundamental
6	2576.000	47.62	-8.26	39.36	74.00	-34.64	peak


Test Mode:	8DPSK	Channel:	2480 MHz
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

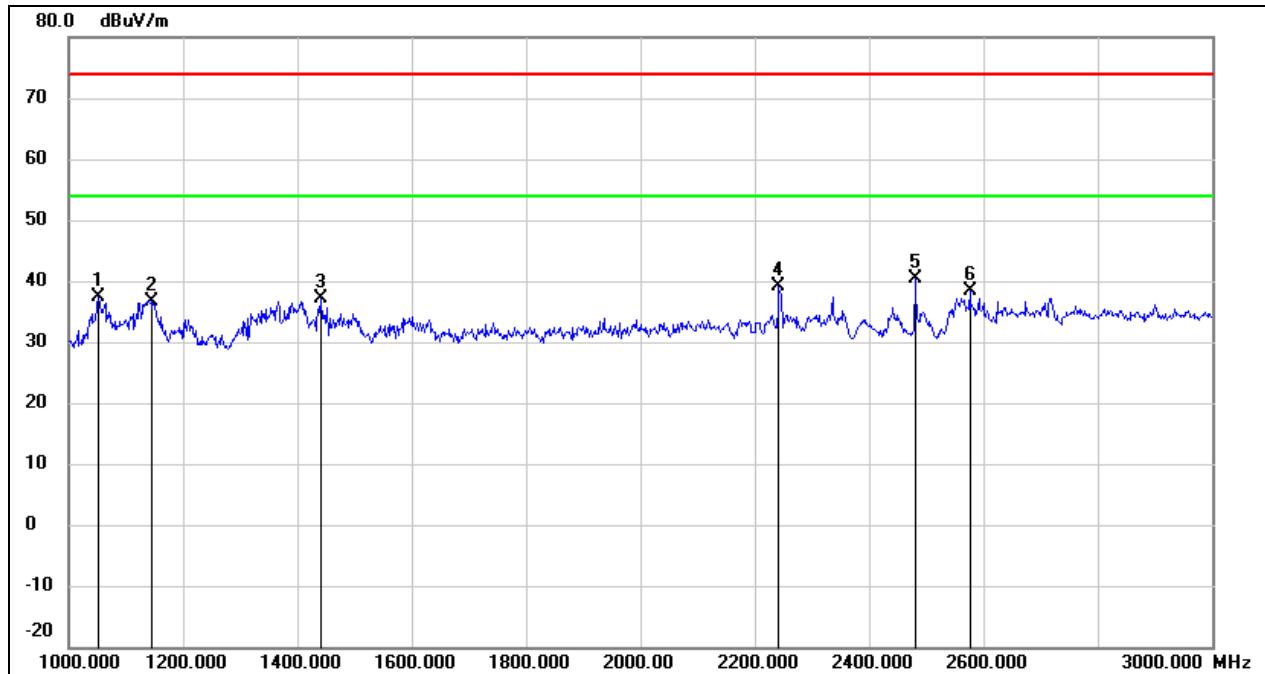

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1052.000	52.14	-14.79	37.35	74.00	-36.65	peak
2	1144.000	51.05	-14.36	36.69	74.00	-37.31	peak
3	1440.000	50.21	-12.98	37.23	74.00	-36.77	peak
4	2242.000	49.02	-9.81	39.21	74.00	-34.79	peak
5	2480.000	48.94	-8.59	40.35	/	/	Fundamental
6	2576.000	46.64	-8.26	38.38	74.00	-35.62	peak

### 8.3. SPURIOUS EMISSIONS (3 GHZ ~ 18 GHZ)


Test Mode:	GFSK	Channel:	2402 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

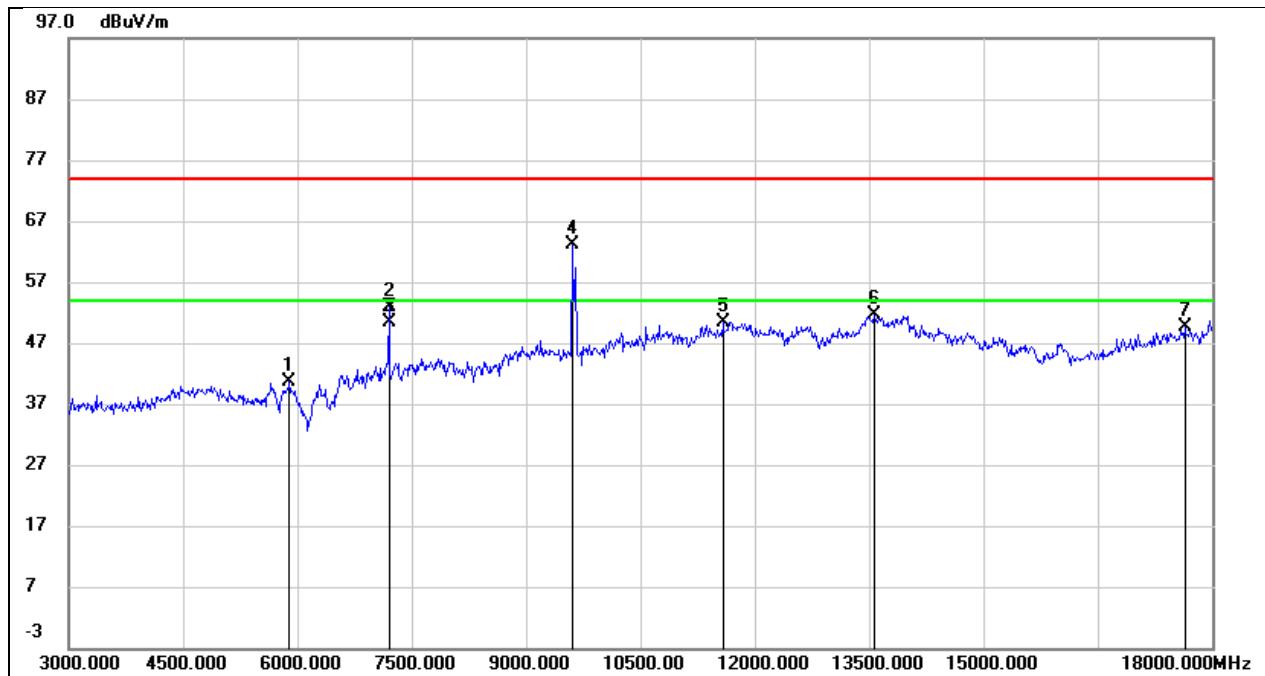

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5895.000	38.72	1.96	40.68	74.00	-33.32	peak
2	7200.000	46.22	6.55	52.77	74.00	-21.23	peak
3	7200.000	43.85	6.55	50.40	54.00	-3.60	AVG
4*	9600.000	52.09	10.95	63.04	74.00	-10.96	peak
5	11580.000	33.57	16.82	50.39	74.00	-23.61	peak
6	13560.000	30.51	21.04	51.55	74.00	-22.45	peak
7	17640.000	26.11	23.56	49.67	74.00	-24.33	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


Test Mode:	GFSK	Channel:	2402 MHz
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

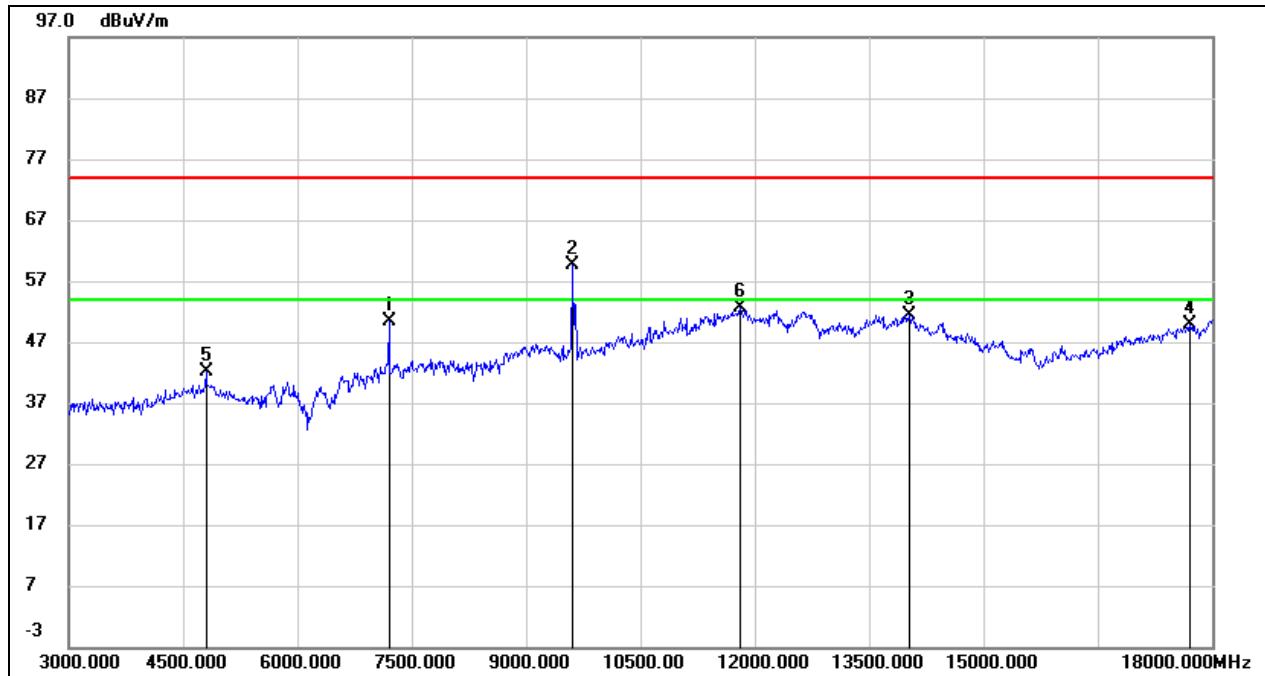

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7200.000	43.85	6.55	50.40	74.00	-23.60	peak
2*	9600.000	48.67	10.95	59.62	74.00	-14.38	peak
3	14025.000	29.64	21.86	51.50	74.00	-22.50	peak
4	17700.000	26.07	23.91	49.98	74.00	-24.02	peak
5	4800.000	42.41	-0.31	42.10	74.00	-31.90	peak
6	11805.000	35.30	17.43	52.73	74.00	-21.27	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


Test Mode:	GFSK	Channel:	2441 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

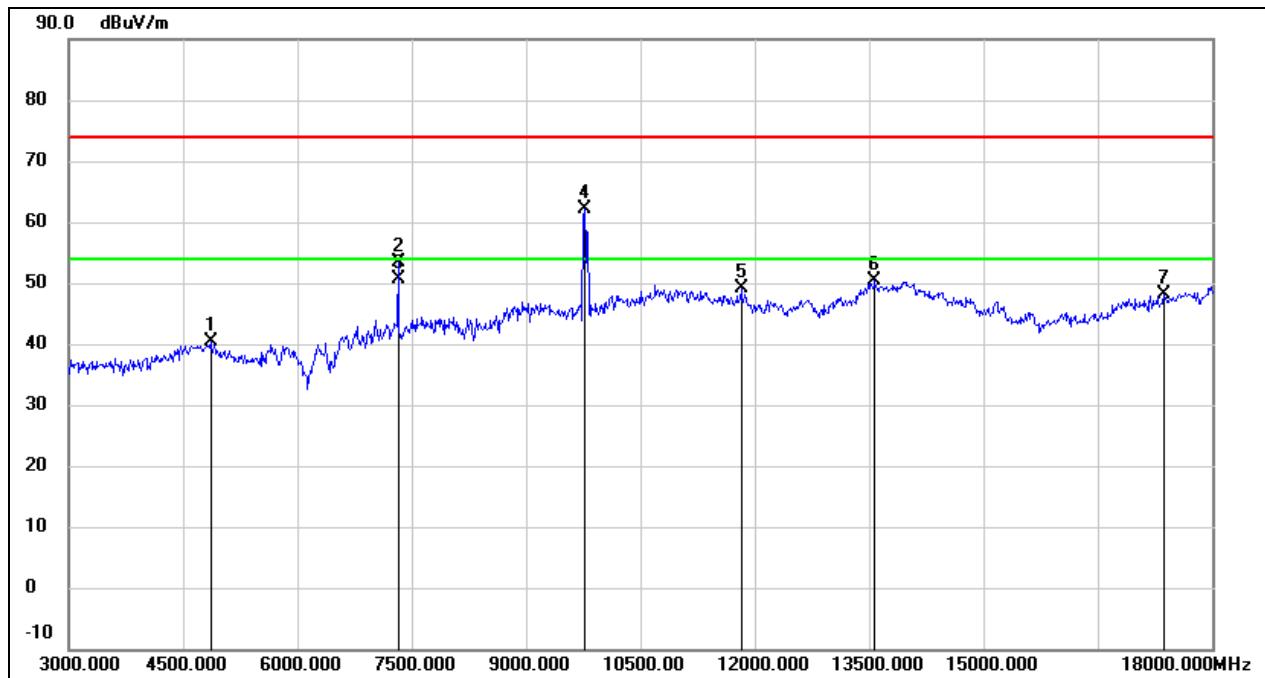

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	40.40	-0.09	40.31	74.00	-33.69	peak
2	7320.000	46.88	6.46	53.34	74.00	-20.66	peak
3	7320.000	44.19	6.46	50.65	54.00	-3.35	AVG
4*	9765.000	50.83	11.40	62.23	74.00	-11.77	peak
5	11820.000	31.59	17.47	49.06	74.00	-24.94	peak
6	13575.000	29.20	21.06	50.26	74.00	-23.74	peak
7	17370.000	25.99	22.25	48.24	74.00	-25.76	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


Test Mode:	GFSK	Channel:	2441 MHz
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

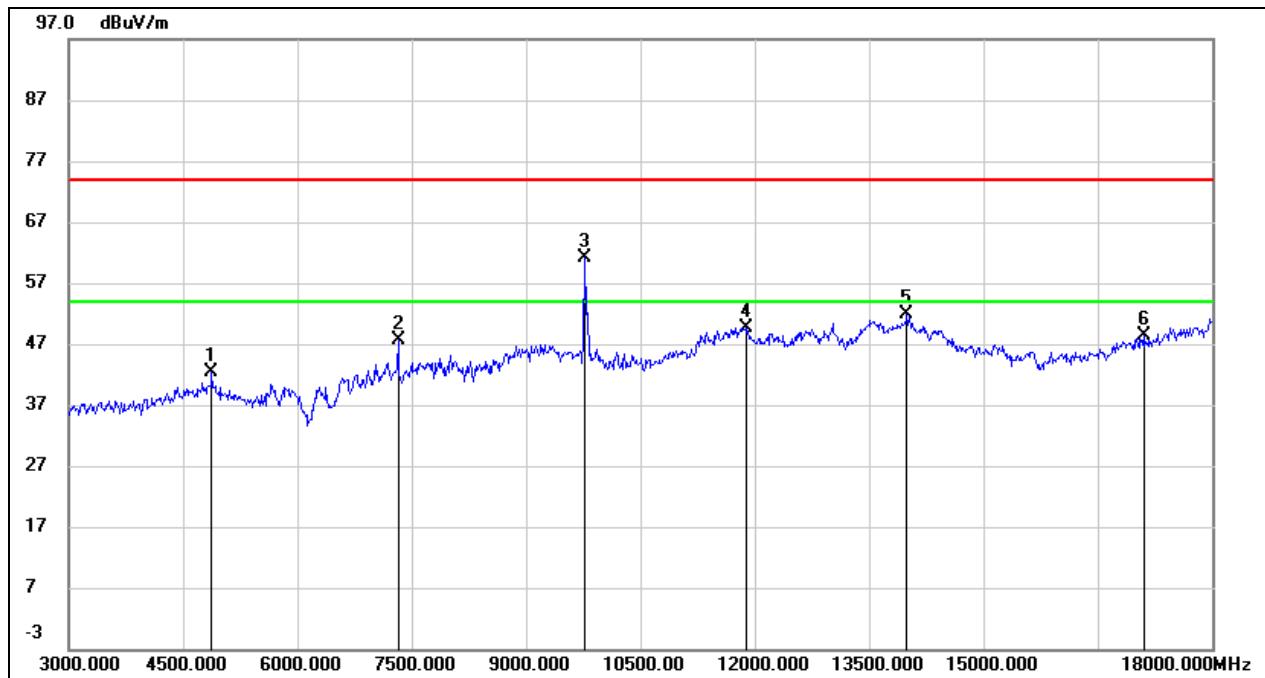

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	42.34	-0.03	42.31	74.00	-31.69	peak
2	7320.000	41.26	6.46	47.72	74.00	-26.28	peak
3*	9765.000	49.61	11.40	61.01	74.00	-12.99	peak
4	11880.000	32.02	17.63	49.65	74.00	-24.35	peak
5	13995.000	30.05	21.95	52.00	74.00	-22.00	peak
6	17100.000	27.02	21.26	48.28	74.00	-25.72	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


Test Mode:	GFSK	Channel:	2480 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

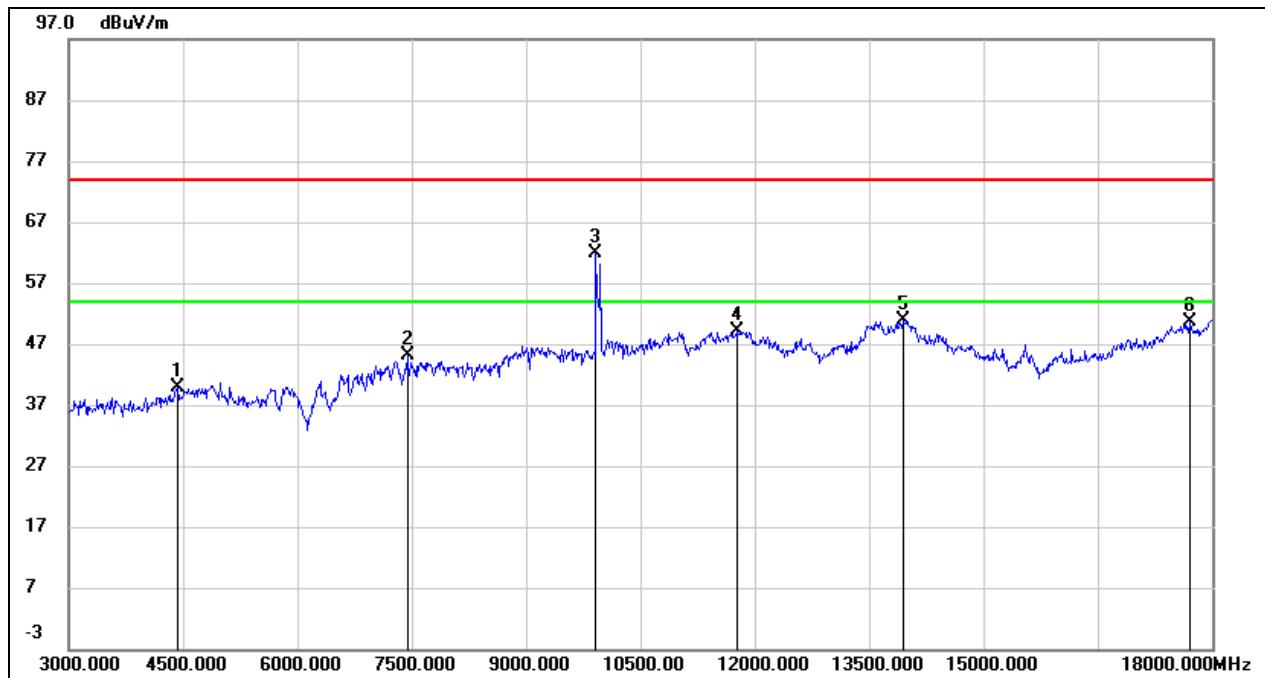

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4425.000	41.65	-1.81	39.84	74.00	-34.16	peak
2	7440.000	38.72	6.38	45.10	74.00	-28.90	peak
3*	9915.000	49.98	11.80	61.78	74.00	-12.22	peak
4	11760.000	31.85	17.31	49.16	74.00	-24.84	peak
5	13950.000	29.07	21.86	50.93	74.00	-23.07	peak
6	17700.000	26.64	23.91	50.55	74.00	-23.45	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


Test Mode:	GFSK	Channel:	2480 MHz
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

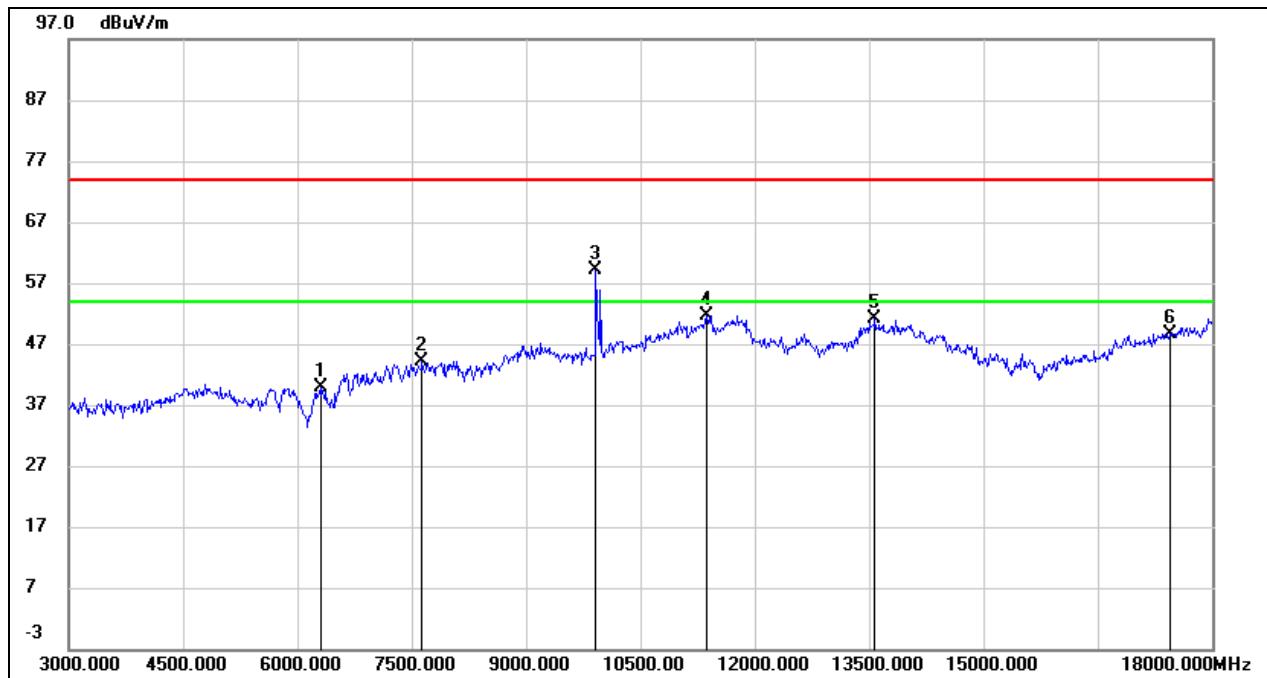

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6300.000	36.44	3.43	39.87	74.00	-34.13	peak
2	7635.000	37.80	6.33	44.13	74.00	-29.87	peak
3*	9915.000	47.31	11.80	59.11	74.00	-14.89	peak
4	11370.000	35.46	16.12	51.58	74.00	-22.42	peak
5	13575.000	30.09	21.06	51.15	74.00	-22.85	peak
6	17445.000	26.20	22.54	48.74	74.00	-25.26	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


Test Mode:	$\pi/4$ -DQPSK	Channel:	2402 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

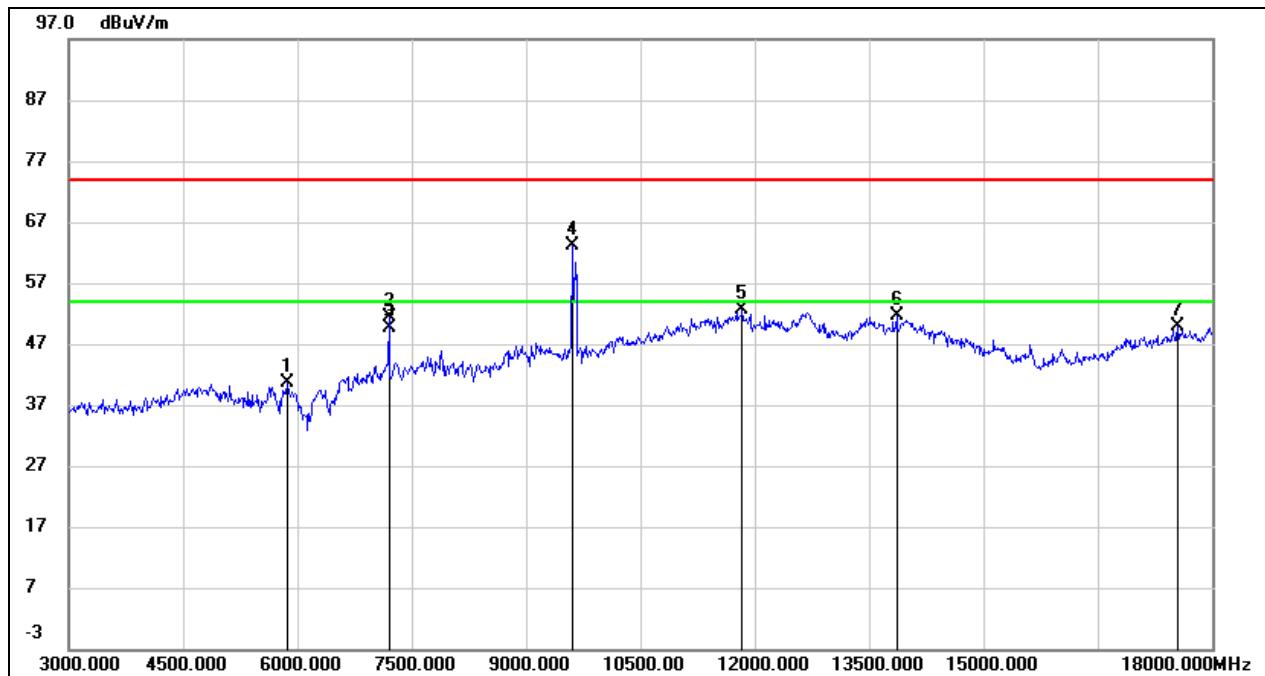

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5865.000	38.77	1.88	40.65	74.00	-33.35	peak
2	7200.000	44.83	6.55	51.38	74.00	-22.62	peak
3	7200.000	43.06	6.55	49.61	54.00	-4.39	AVG
4*	9600.000	52.29	10.95	63.24	74.00	-10.76	peak
5	11835.000	35.06	17.51	52.57	74.00	-21.43	peak
6	13860.000	29.87	21.67	51.54	74.00	-22.46	peak
7	17550.000	26.81	23.03	49.84	74.00	-24.16	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


Test Mode:	$\pi/4$ -DQPSK	Channel:	2402 MHz
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

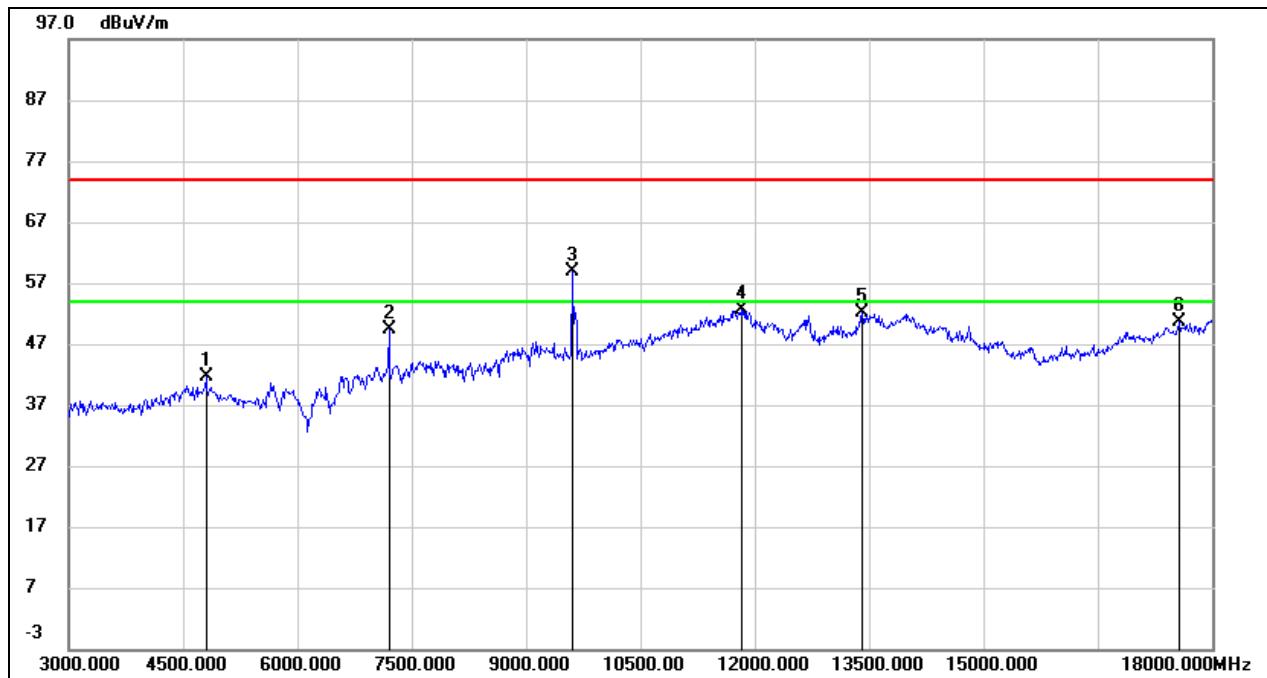

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	41.91	-0.31	41.60	74.00	-32.40	peak
2	7200.000	42.71	6.55	49.26	74.00	-24.74	peak
3*	9600.000	48.01	10.95	58.96	74.00	-15.04	peak
4	11835.000	35.03	17.51	52.54	74.00	-21.46	peak
5	13410.000	31.51	20.50	52.01	74.00	-21.99	peak
6	17565.000	27.40	23.11	50.51	74.00	-23.49	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


Test Mode:	$\pi/4$ -DQPSK	Channel:	2441 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

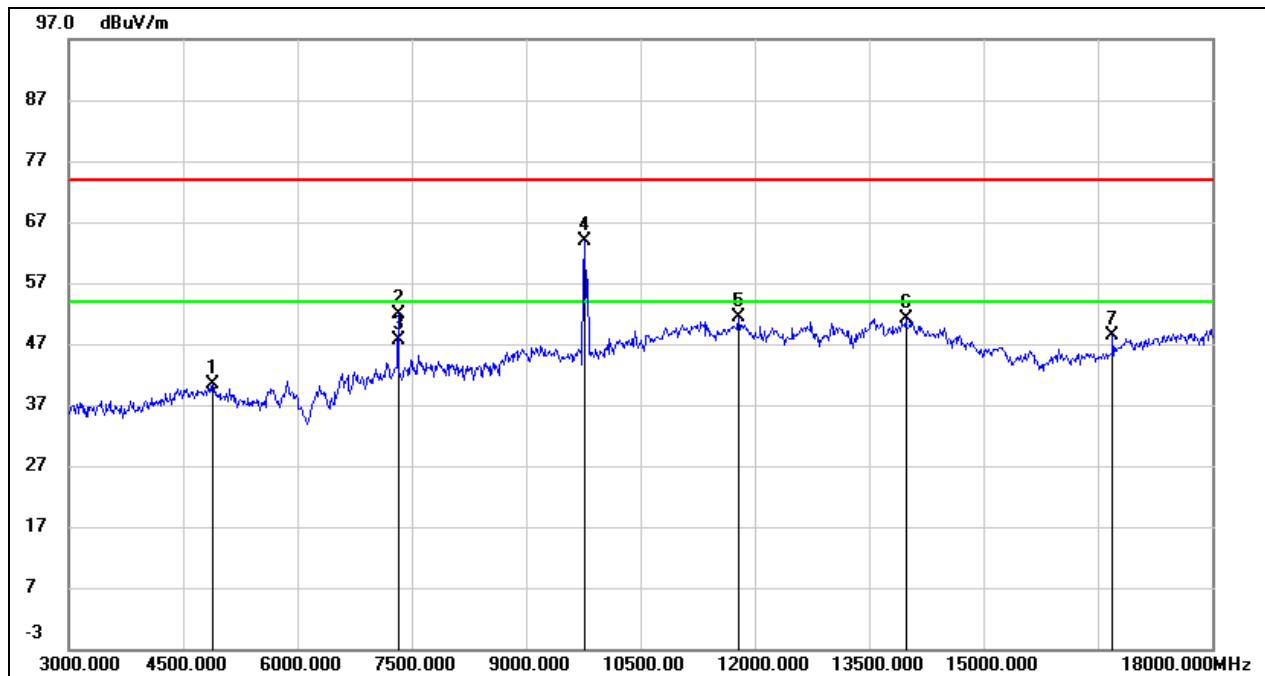

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4890.000	40.26	0.03	40.29	74.00	-33.71	peak
2	7320.000	45.54	6.46	52.00	74.00	-22.00	peak
3	7320.000	41.17	6.46	47.63	54.00	-6.37	AVG
4*	9765.000	52.38	11.40	63.78	74.00	-10.22	peak
5	11790.000	34.01	17.38	51.39	74.00	-22.61	peak
6	13980.000	29.24	21.92	51.16	74.00	-22.84	peak
7	16695.000	28.78	19.54	48.32	74.00	-25.68	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


Test Mode:	$\pi/4$ -DQPSK	Channel:	2441 MHz
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

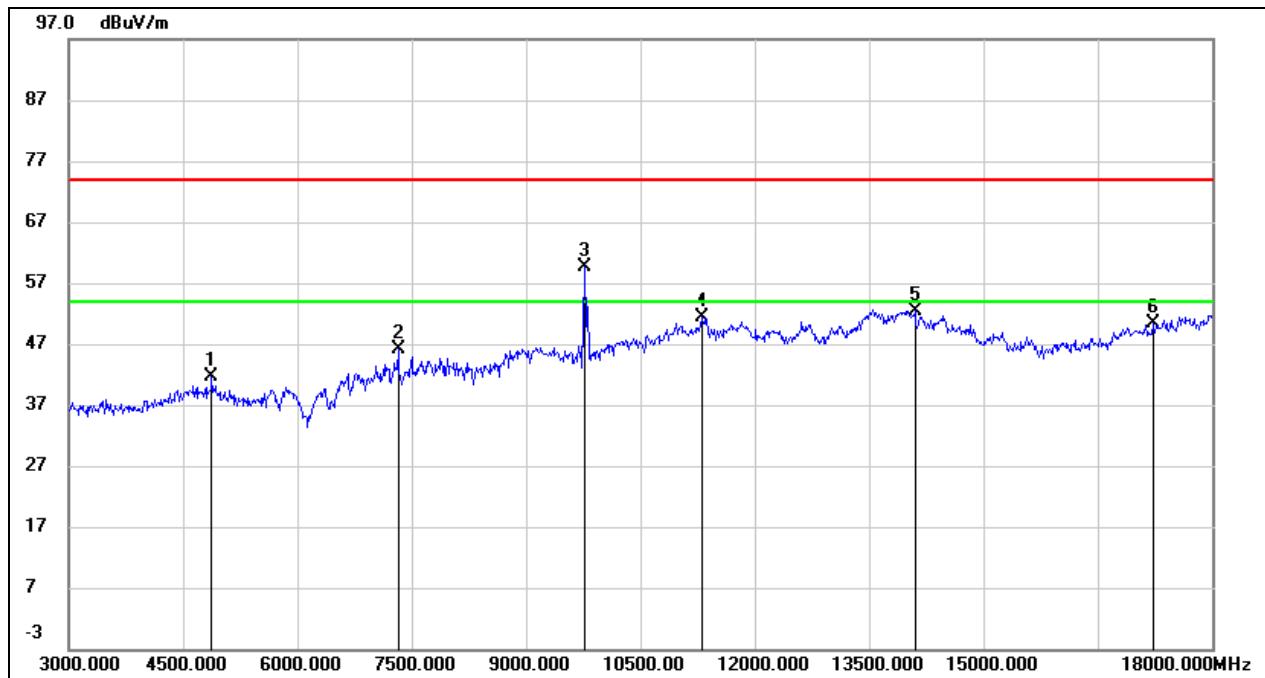

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	41.65	-0.03	41.62	74.00	-32.38	peak
2	7320.000	39.72	6.46	46.18	74.00	-27.82	peak
3*	9765.000	48.14	11.40	59.54	74.00	-14.46	peak
4	11310.000	35.55	15.91	51.46	74.00	-22.54	peak
5	14100.000	30.91	21.55	52.46	74.00	-21.54	peak
6	17220.000	28.64	21.71	50.35	74.00	-23.65	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


Test Mode:	$\pi/4$ -DQPSK	Channel:	2480 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

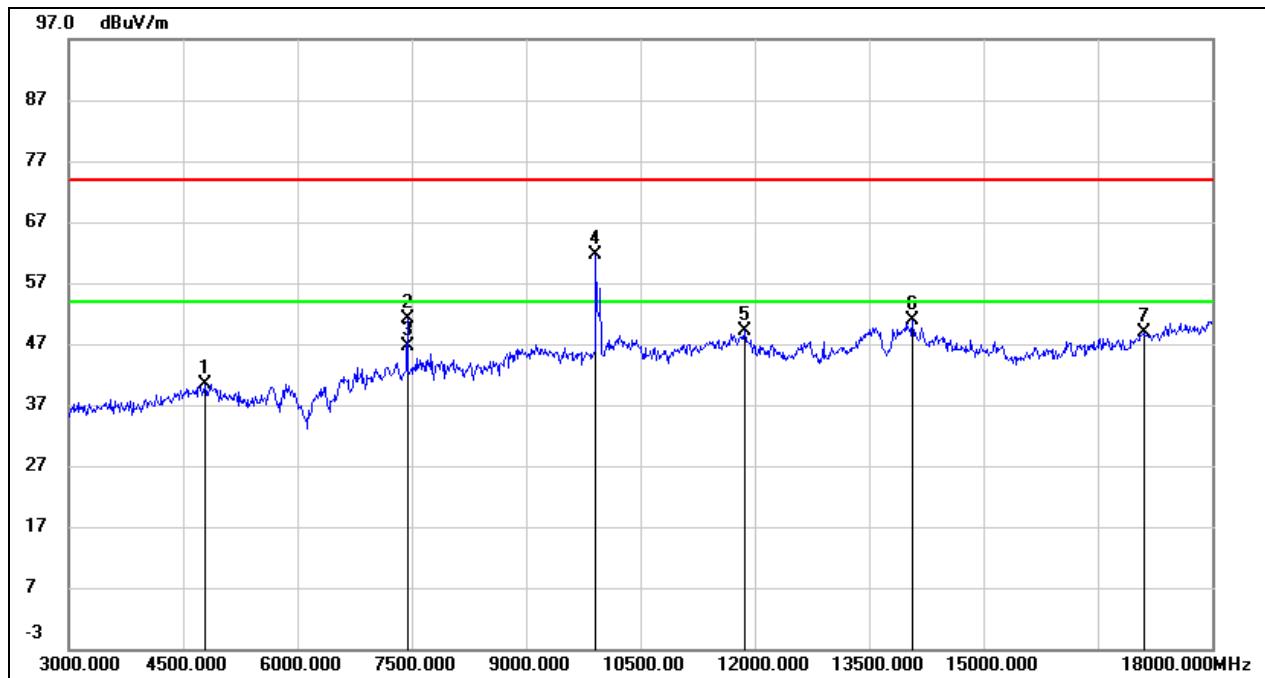

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4785.000	40.68	-0.37	40.31	74.00	-33.69	peak
2	7440.000	44.84	6.38	51.22	74.00	-22.78	peak
3	7440.000	40.29	6.38	46.67	54.00	-7.33	AVG
4*	9915.000	49.82	11.80	61.62	74.00	-12.38	peak
5	11865.000	31.62	17.59	49.21	74.00	-24.79	peak
6	14070.000	29.13	21.67	50.80	74.00	-23.20	peak
7	17115.000	27.57	21.31	48.88	74.00	-25.12	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


Test Mode:	$\pi/4$ -DQPSK	Channel:	2480 MHz
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

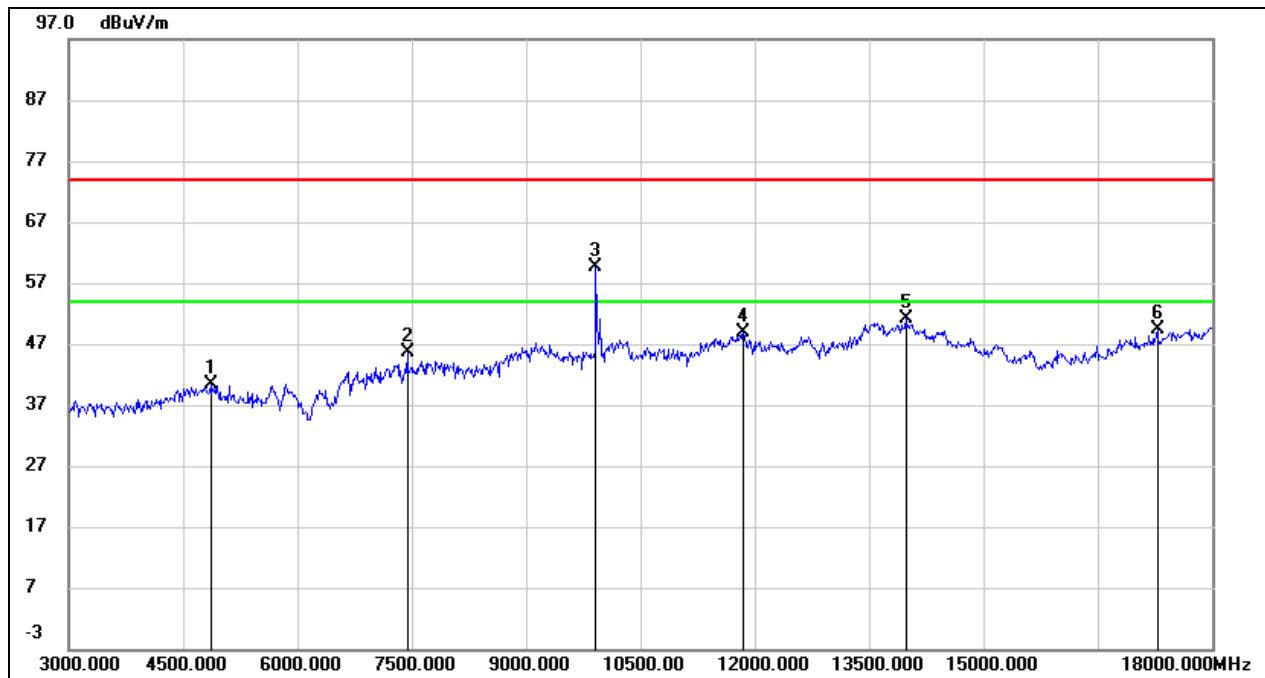

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	40.54	-0.09	40.45	74.00	-33.55	peak
2	7440.000	39.13	6.38	45.51	74.00	-28.49	peak
3*	9915.000	47.90	11.80	59.70	74.00	-14.30	peak
4	11850.000	31.26	17.56	48.82	74.00	-25.18	peak
5	13980.000	29.23	21.92	51.15	74.00	-22.85	peak
6	17280.000	27.47	21.91	49.38	74.00	-24.62	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


Test Mode:	8DPSK	Channel:	2402 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

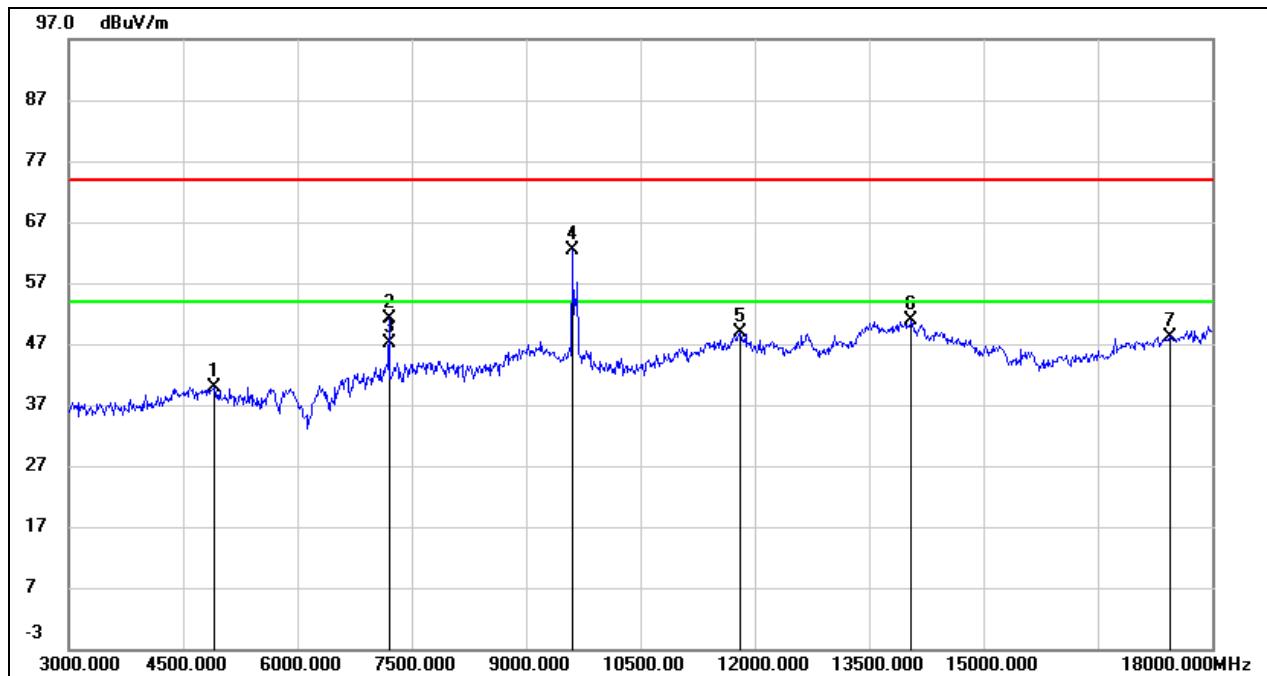

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	39.82	0.09	39.91	74.00	-34.09	peak
2	7200.000	44.68	6.55	51.23	74.00	-22.77	peak
3	7200.000	40.66	6.55	47.21	54.00	-6.79	AVG
4*	9600.000	51.49	10.95	62.44	74.00	-11.56	peak
5	11805.000	31.40	17.43	48.83	74.00	-25.17	peak
6	14055.000	29.23	21.73	50.96	74.00	-23.04	peak
7	17445.000	25.55	22.54	48.09	74.00	-25.91	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


Test Mode:	8DPSK	Channel:	2402 MHz
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

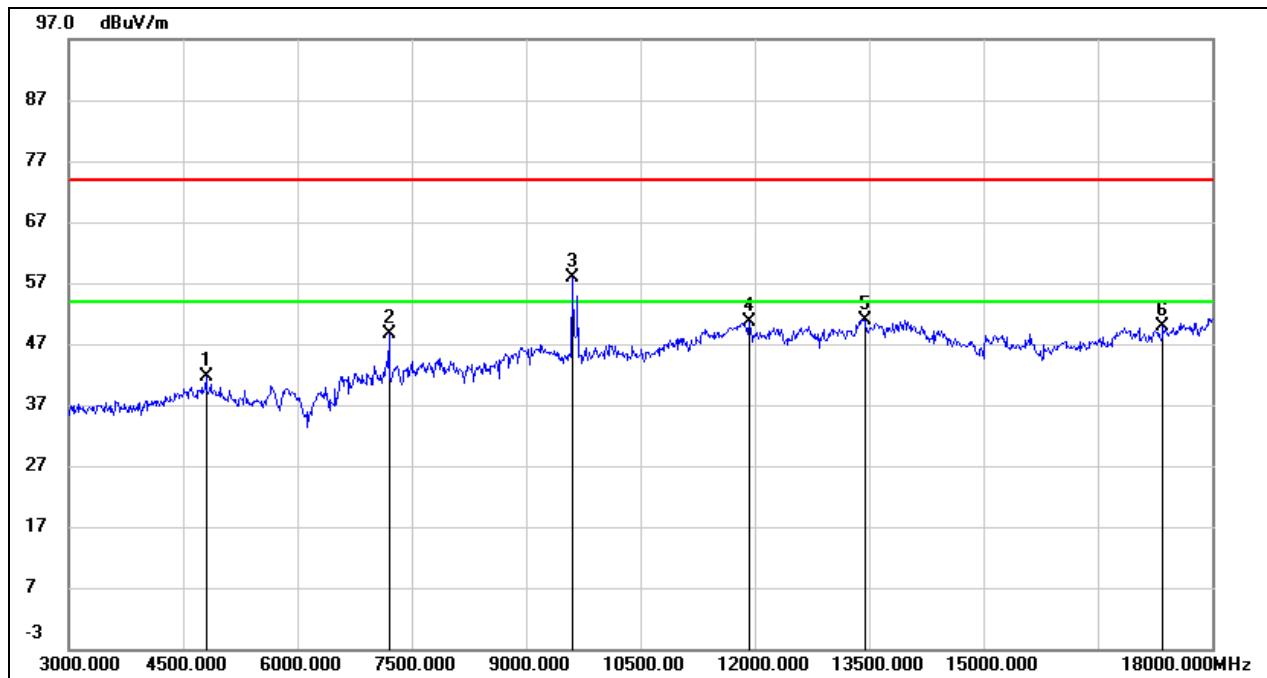

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	41.88	-0.31	41.57	74.00	-32.43	peak
2	7200.000	42.06	6.55	48.61	74.00	-25.39	peak
3*	9600.000	46.99	10.95	57.94	74.00	-16.06	peak
4	11925.000	32.91	17.75	50.66	74.00	-23.34	peak
5	13440.000	30.19	20.64	50.83	74.00	-23.17	peak
6	17355.000	27.69	22.19	49.88	74.00	-24.12	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


Test Mode:	8DPSK	Channel:	2441 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

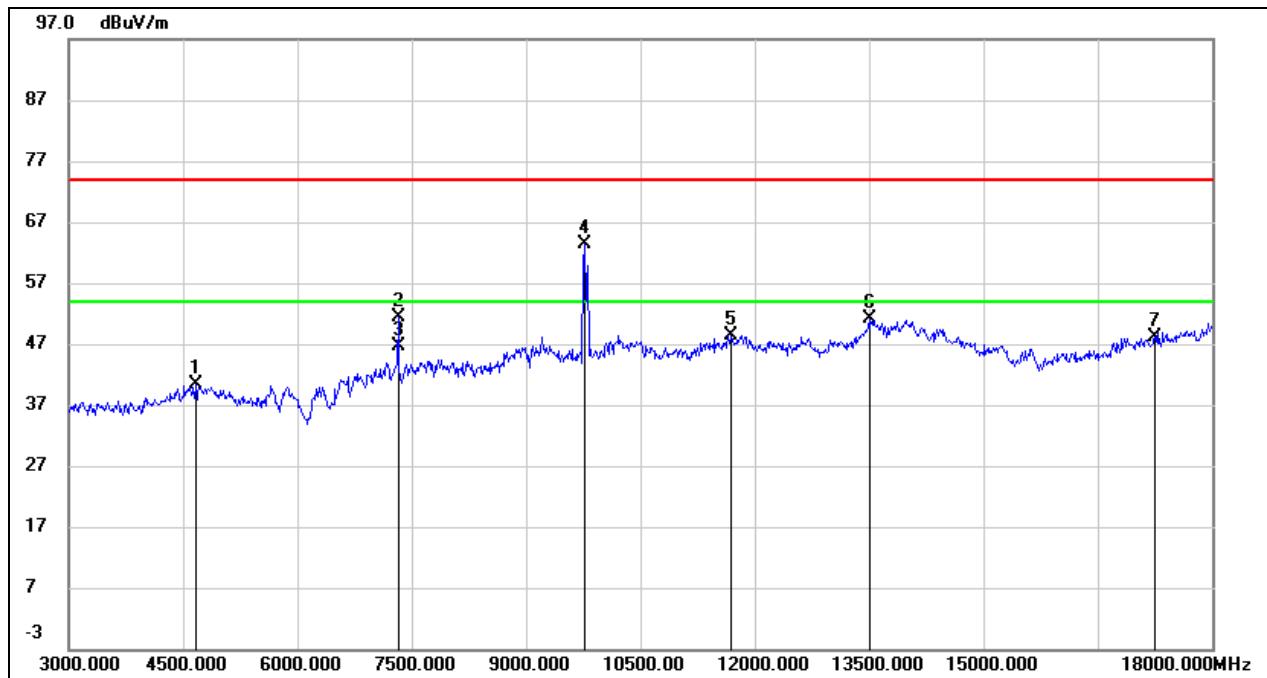

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4665.000	41.13	-0.83	40.30	74.00	-33.70	peak
2	7320.000	44.94	6.46	51.40	74.00	-22.60	peak
3	7320.000	40.25	6.46	46.71	54.00	-7.29	AVG
4*	9765.000	52.03	11.40	63.43	74.00	-10.57	peak
5	11685.000	31.33	17.10	48.43	74.00	-25.57	peak
6	13500.000	30.12	20.90	51.02	74.00	-22.98	peak
7	17250.000	26.39	21.81	48.20	74.00	-25.80	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


Test Mode:	8DPSK	Channel:	2441 MHz
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

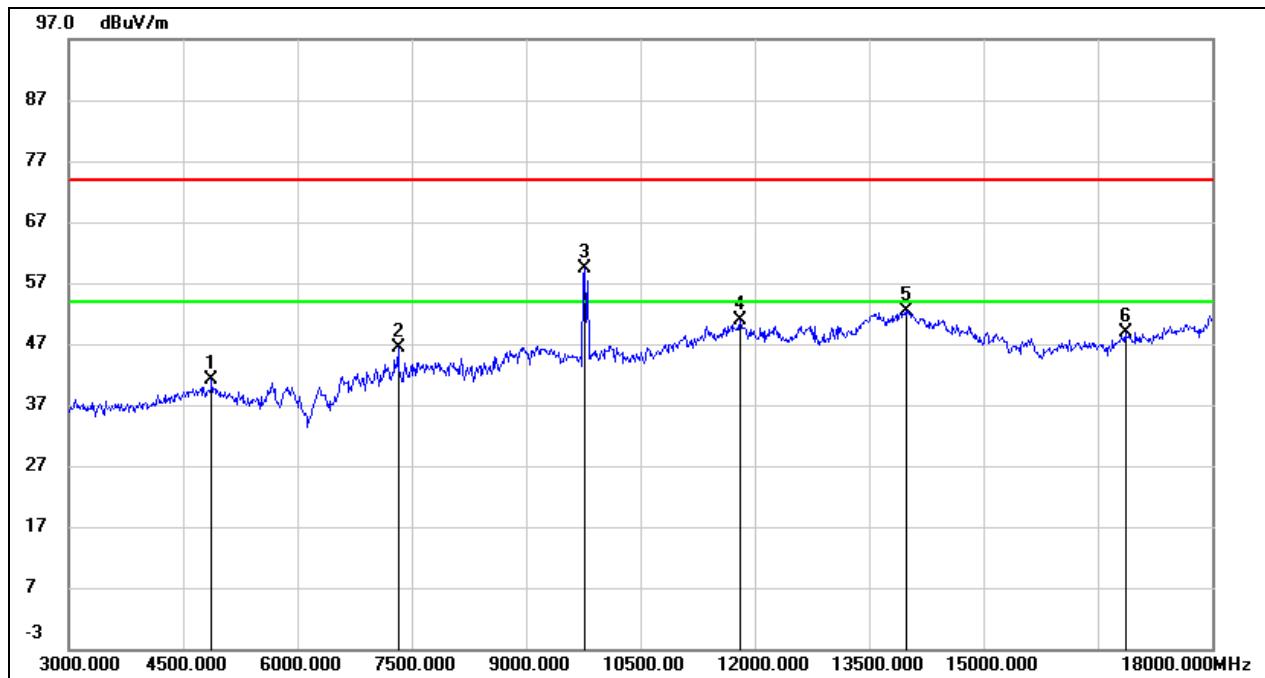

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	41.07	-0.03	41.04	74.00	-32.96	peak
2	7320.000	39.87	6.46	46.33	74.00	-27.67	peak
3*	9765.000	48.00	11.40	59.40	74.00	-14.60	peak
4	11805.000	33.42	17.43	50.85	74.00	-23.15	peak
5	13980.000	30.56	21.92	52.48	74.00	-21.52	peak
6	16860.000	28.72	20.28	49.00	74.00	-25.00	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


Test Mode:	8DPSK	Channel:	2480 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

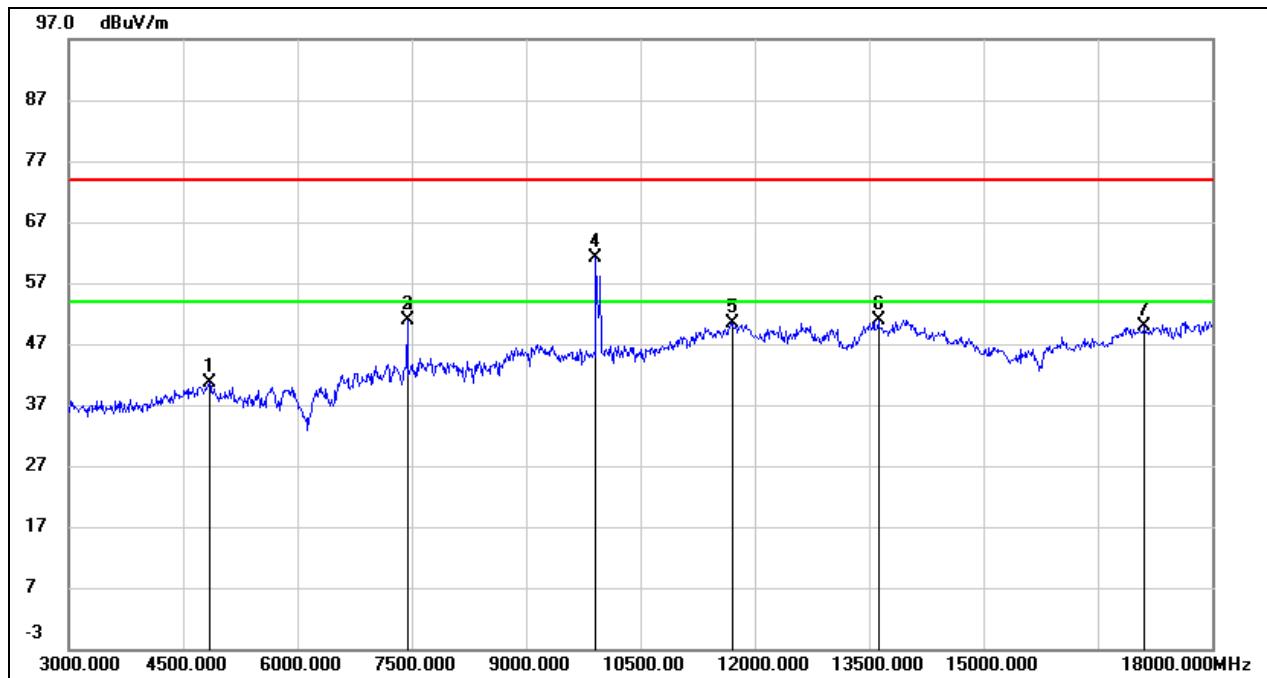

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4845.000	40.69	-0.15	40.54	74.00	-33.46	peak
2	7440.000	44.51	6.38	50.89	74.00	-23.11	peak
3	7440.000	44.51	6.38	50.89	74.00	-23.11	peak
4*	9915.000	49.45	11.80	61.25	74.00	-12.75	peak
5	11700.000	33.19	17.14	50.33	74.00	-23.67	peak
6	13620.000	29.84	21.15	50.99	74.00	-23.01	peak
7	17115.000	28.55	21.31	49.86	74.00	-24.14	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.

Test Mode:	8DPSK	Channel:	2480 MHz
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

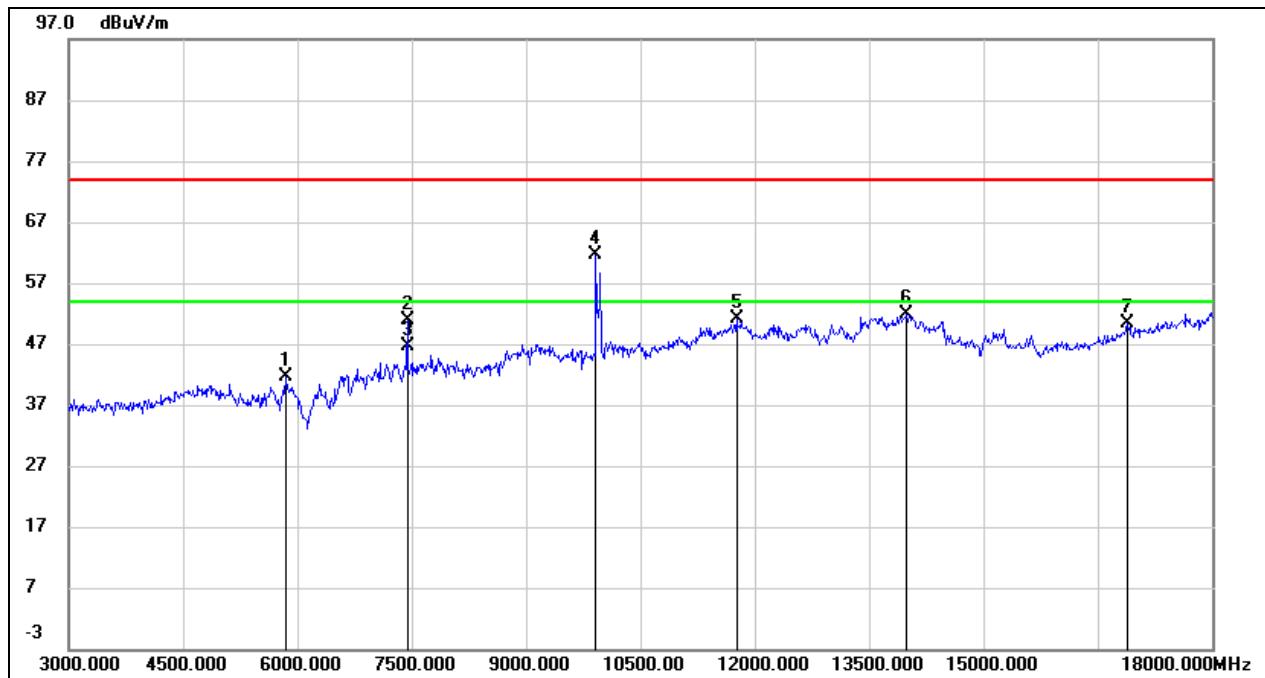


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	39.81	1.82	41.63	74.00	-32.37	peak
2	7440.000	44.38	6.38	50.76	74.00	-23.24	peak
3	7440.000	40.22	6.38	46.60	54.00	-7.40	AVG
4*	9915.000	49.72	11.80	61.52	74.00	-12.48	peak
5	11760.000	33.89	17.31	51.20	74.00	-22.80	peak
6	13995.000	29.84	21.95	51.79	74.00	-22.21	peak
7	16890.000	29.98	20.40	50.38	74.00	-23.62	peak

\* The test frequency is out of restricted bands, no limit for radiated spurious emission.


## 8.4. SPURIOUS EMISSIONS (9 KHZ ~ 30 MHZ)

Test Mode:	8DPSK	Channel:	2480 MHz
Polarity:	Loop Antenna Face On To The EUT	Test Voltage:	AC 120 V, 60 Hz

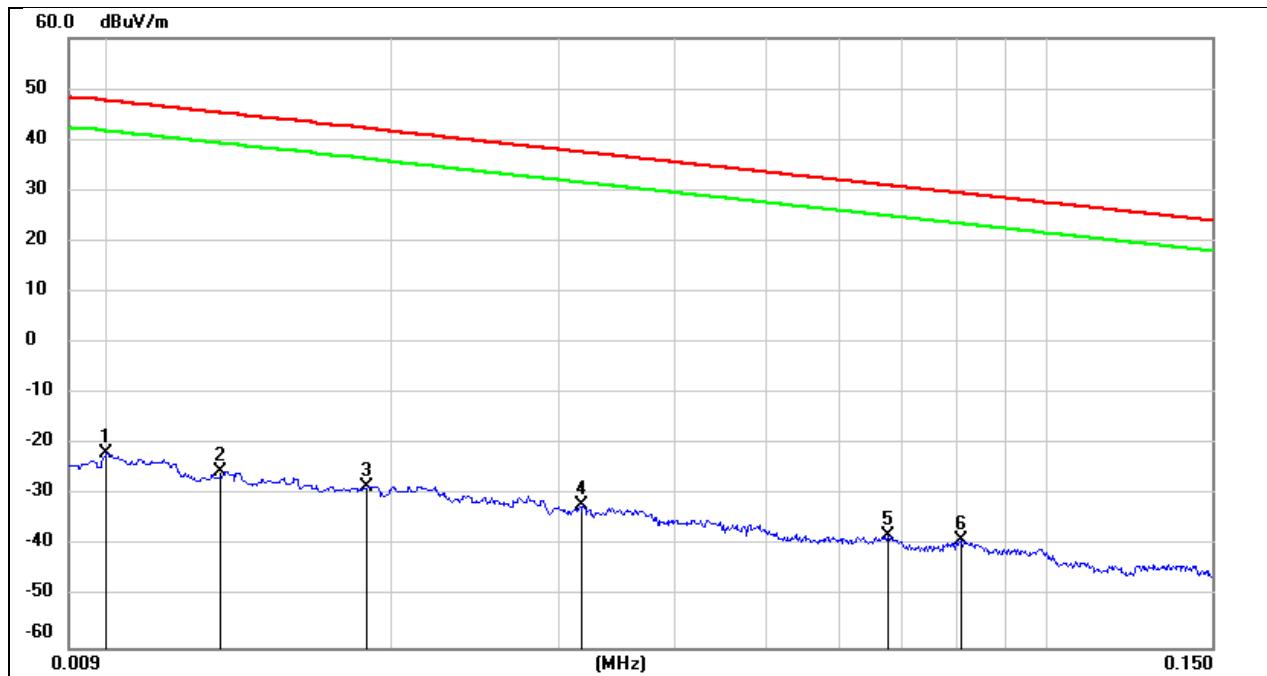


No.	Frequency	Reading	Correct	Result	Result	Limit	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuA/m)	(dBuV/m)	(dBuA/m)	(dB)	
1	0.01	79.72	-101.4	-21.68	-73.18	47.6	-3.9	-69.28	peak
2	0.0131	75.97	-101.38	-25.41	-76.91	45.25	-6.25	-70.66	peak
3	0.0188	73.14	-101.35	-28.21	-79.71	42.12	-9.38	-70.33	peak
4	0.0318	69.34	-101.4	-32.06	-83.56	37.55	-13.95	-69.61	peak
5	0.0675	63.64	-101.56	-37.92	-89.42	31.02	-20.48	-68.94	peak
6	0.0806	62.68	-101.63	-38.95	-90.45	29.47	-22.03	-68.42	peak

Test Mode:	8DPSK	Channel:	2480 MHz
Polarity:	Loop Antenna Face On To The EUT	Test Voltage:	AC 120 V, 60 Hz

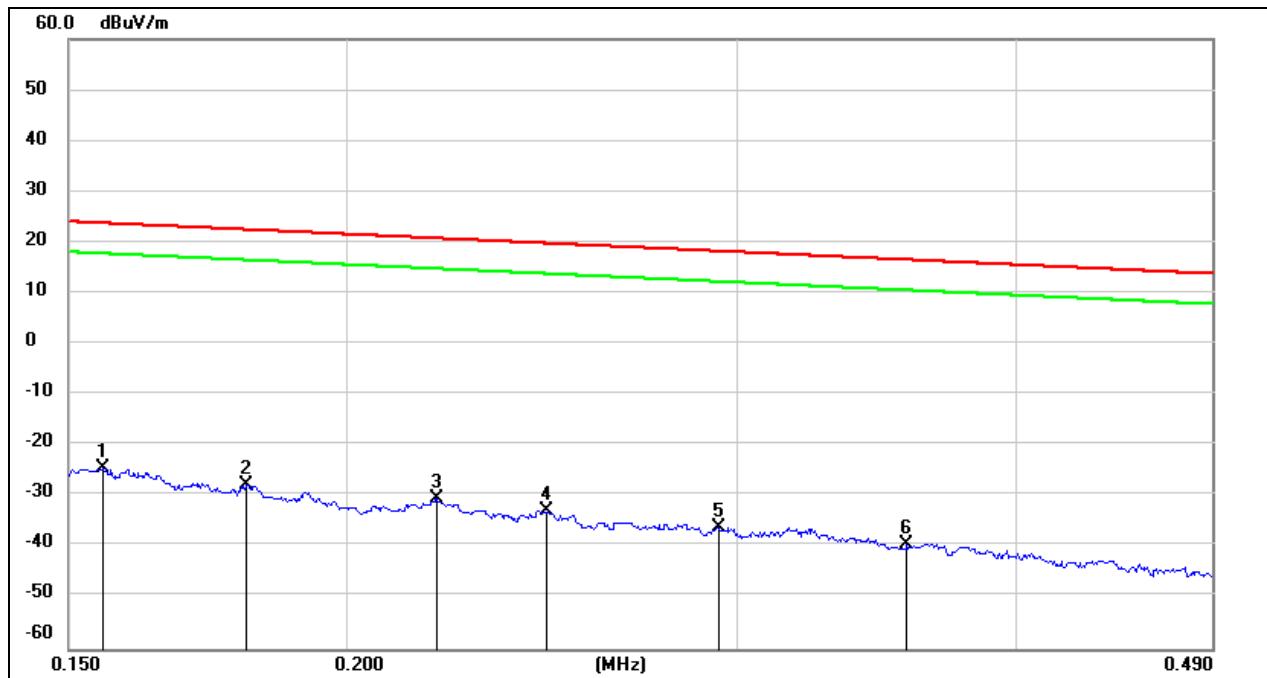

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Result (dBuA/m)	Limit (dBuV/m)	Limit (dBuA/m)	Margin (dB)	Remark
1	0.1554	77.27	-101.65	-24.38	-75.88	23.77	-27.73	-48.15	peak
2	0.1801	74.03	-101.68	-27.65	-79.15	22.5	-29	-50.15	peak
3	0.2197	71.27	-101.75	-30.48	-81.98	20.76	-30.74	-51.24	peak
4	0.2462	68.86	-101.8	-32.94	-84.44	19.78	-31.72	-52.72	peak
5	0.2942	65.82	-101.85	-36.03	-87.53	18.23	-33.27	-54.26	peak
6	0.3573	62.58	-101.91	-39.33	-90.83	16.54	-34.96	-55.87	peak


Test Mode:	8DPSK	Channel:	2480 MHz
Polarity:	Loop Antenna Face On To The EUT	Test Voltage:	AC 120 V, 60 Hz

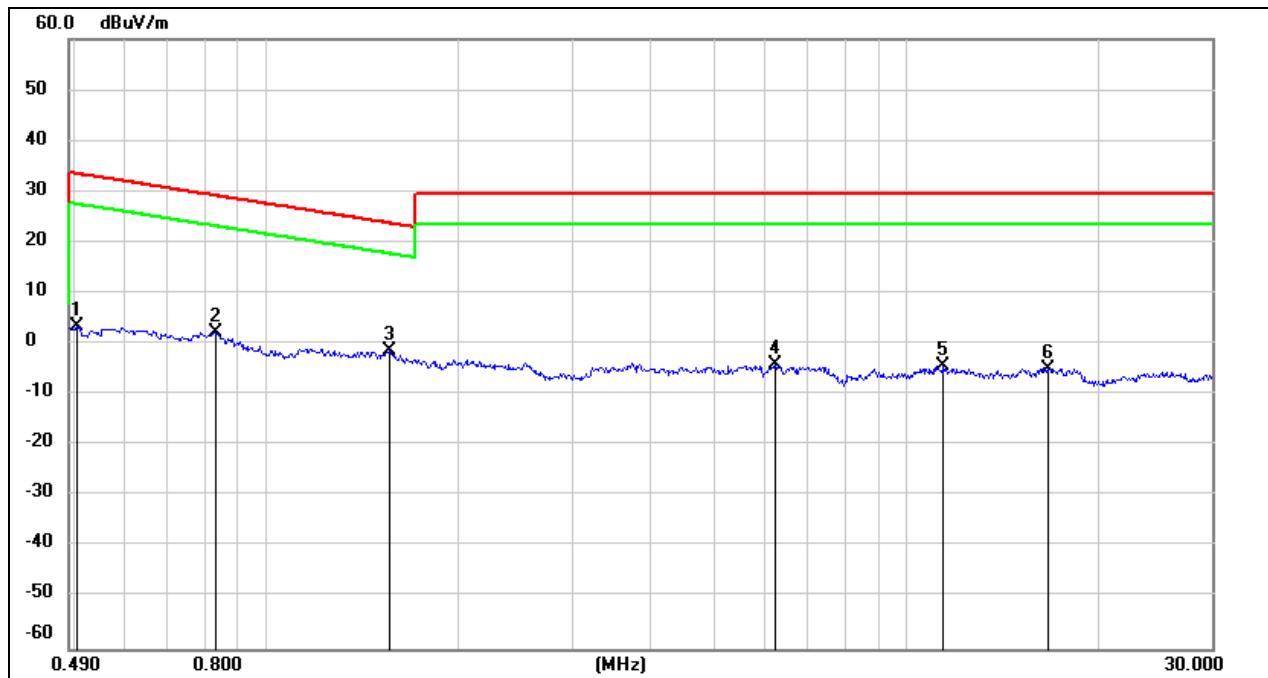

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Result (dBuA/m)	Limit (dBuV/m)	Limit (dBuA/m)	Margin (dB)	Remark
1	0.5039	65.43	-62.07	3.36	-48.14	33.56	-17.94	-30.20	peak
2	0.8296	64.44	-62.17	2.27	-49.23	29.23	-22.27	-26.96	peak
3	1.5564	60.68	-62.02	-1.34	-52.84	23.76	-27.74	-25.10	peak
4	6.2445	57.13	-61.32	-4.19	-55.69	29.54	-21.96	-33.73	peak
5	11.4382	56.37	-60.86	-4.49	-55.99	29.54	-21.96	-34.03	peak
6	16.6021	56.02	-60.96	-4.94	-56.44	29.54	-21.96	-34.48	peak


## 8.5. SPURIOUS EMISSIONS (18 GHZ ~ 26 GHZ)

Test Mode:	8DPSK	Channel:	2480 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

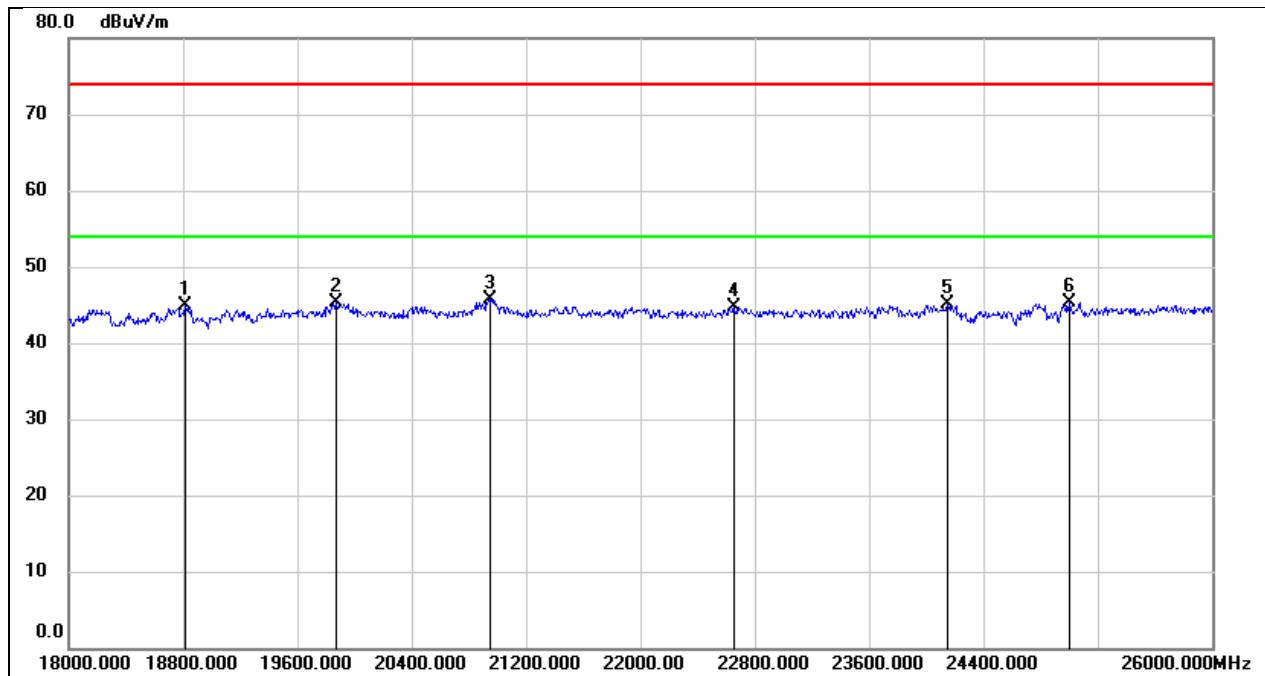

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18816.000	50.21	-5.38	44.83	74.00	-29.17	peak
2	19872.000	50.61	-5.34	45.27	74.00	-28.73	peak
3	20944.000	50.64	-4.93	45.71	74.00	-28.29	peak
4	22656.000	48.45	-3.77	44.68	74.00	-29.32	peak
5	24144.000	47.91	-2.79	45.12	74.00	-28.88	peak
6	25000.000	47.36	-2.10	45.26	74.00	-28.74	peak


Test Mode:	8DPSK	Channel:	2480 MHz
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

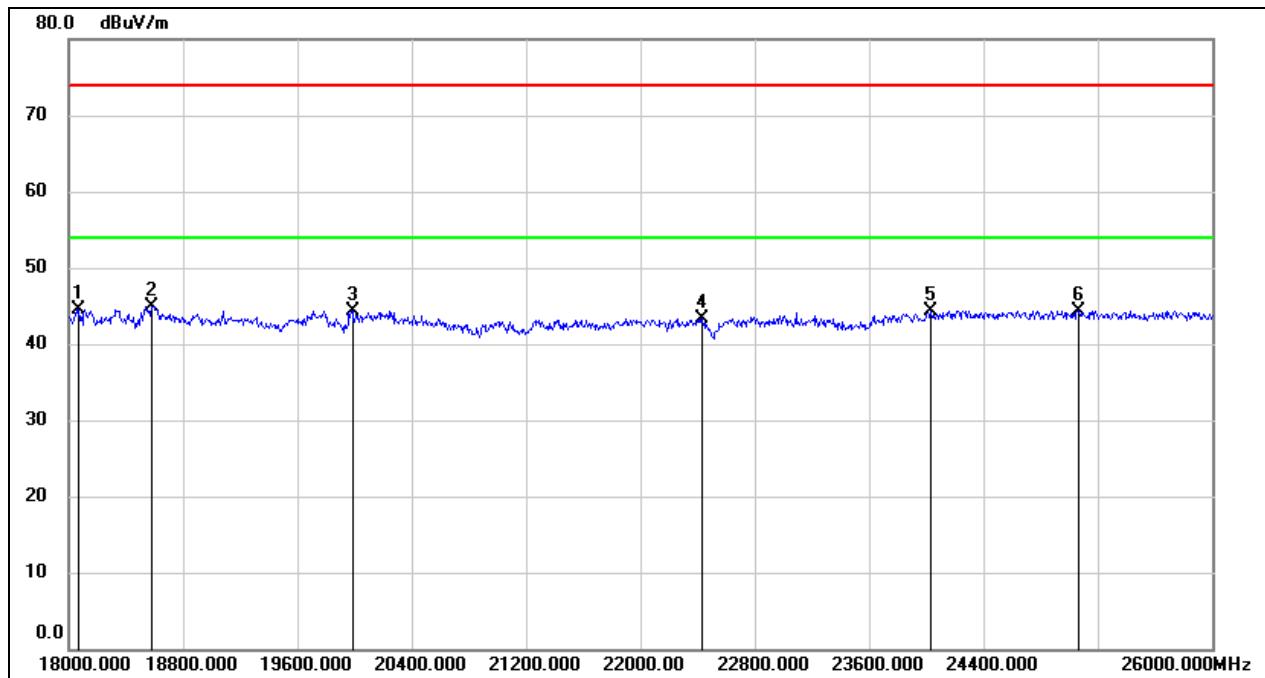

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18072.000	50.03	-5.43	44.60	74.00	-29.40	peak
2	18576.000	50.29	-5.30	44.99	74.00	-29.01	peak
3	19984.000	49.71	-5.44	44.27	74.00	-29.73	peak
4	22432.000	47.26	-3.97	43.29	74.00	-30.71	peak
5	24032.000	46.97	-2.75	44.22	74.00	-29.78	peak
6	25064.000	46.29	-1.99	44.30	74.00	-29.70	peak


## 8.6. SPURIOUS EMISSIONS (30 MHZ ~ 1 GHZ)

Test Mode:	8DPSK	Channel:	2480 MHz
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

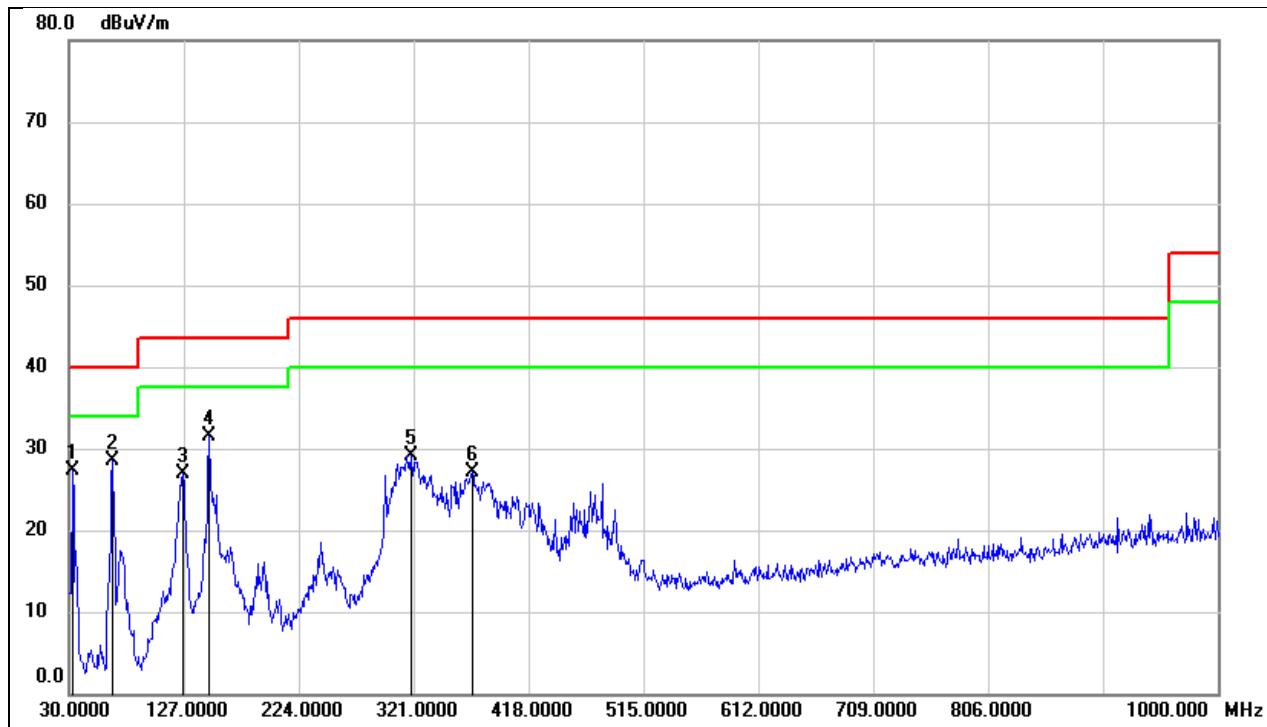

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.9100	45.94	-18.69	27.25	40.00	-12.75	QP
2	66.8600	49.10	-20.63	28.47	40.00	-11.53	QP
3	126.0300	46.45	-19.53	26.92	43.50	-16.58	QP
4	148.3400	49.92	-18.45	31.47	43.50	-12.03	QP
5	319.0600	43.49	-14.29	29.20	46.00	-16.80	QP
6	370.4700	40.07	-12.98	27.09	46.00	-18.91	QP

Test Mode:	8DPSK	Channel:	2480 MHz
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

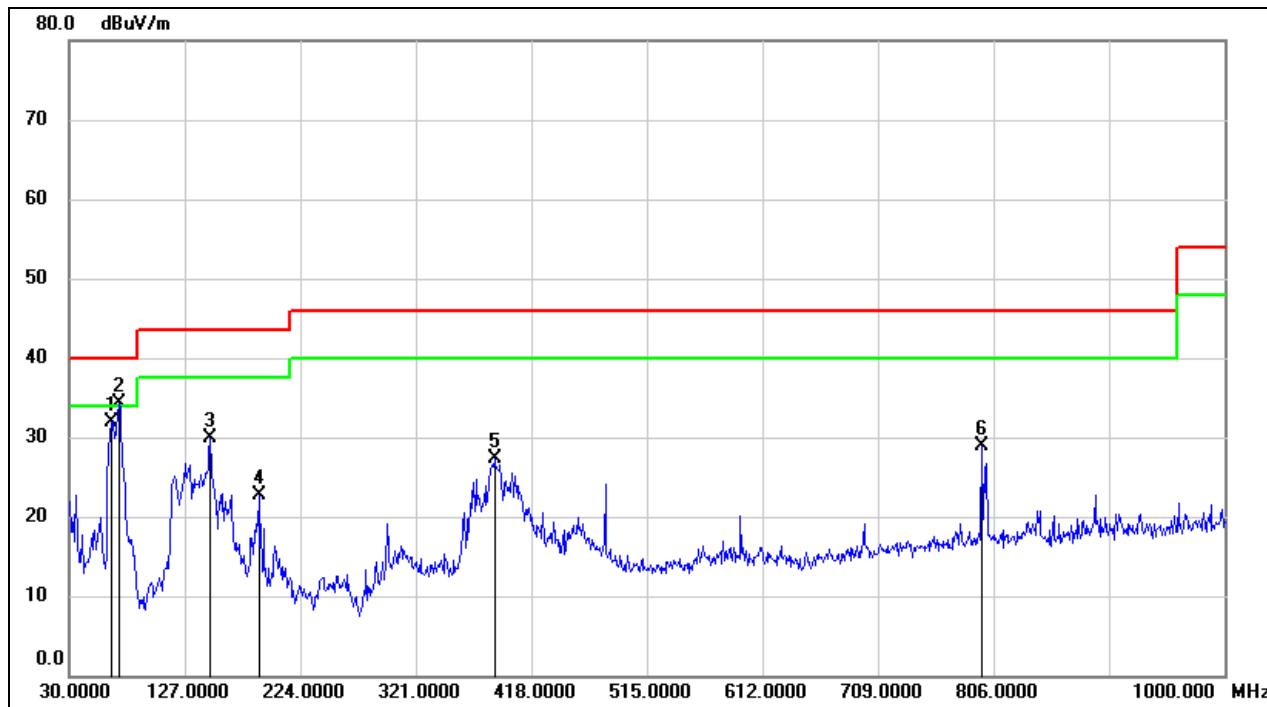

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	65.8900	52.48	-20.58	31.90	40.00	-8.10	QP
2	71.7100	55.26	-20.90	34.36	40.00	-5.64	QP
3	148.3400	48.44	-18.45	29.99	43.50	-13.51	QP
4	189.0800	39.43	-16.68	22.75	43.50	-20.75	QP
5	386.9600	40.10	-12.88	27.22	46.00	-18.78	QP
6	796.3000	35.59	-6.64	28.95	46.00	-17.05	QP

## 9. AC POWER LINE CONDUCTED EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST PROCEDURE


#### TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

#### TEST SETUP

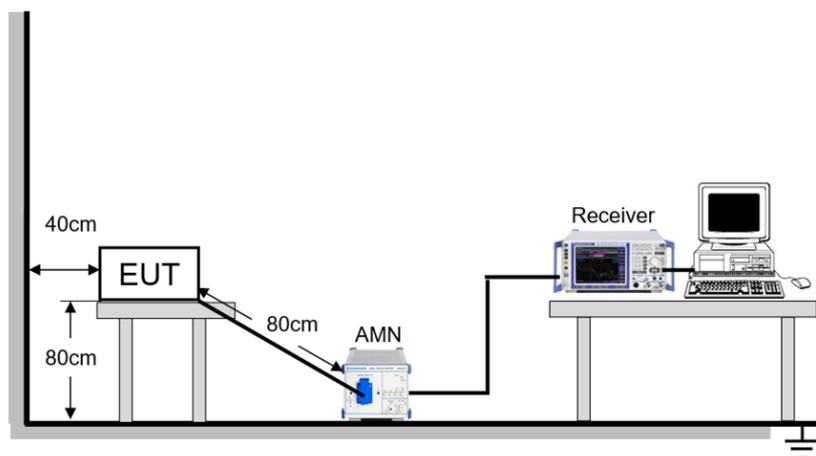


**TEST ENVIRONMENT**

Temperature	25.3 °C	Relative Humidity	53.7%
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

**TEST RESULTS**

Test Mode:	8DPSK	Channel:	2480 MHz
Line	L		

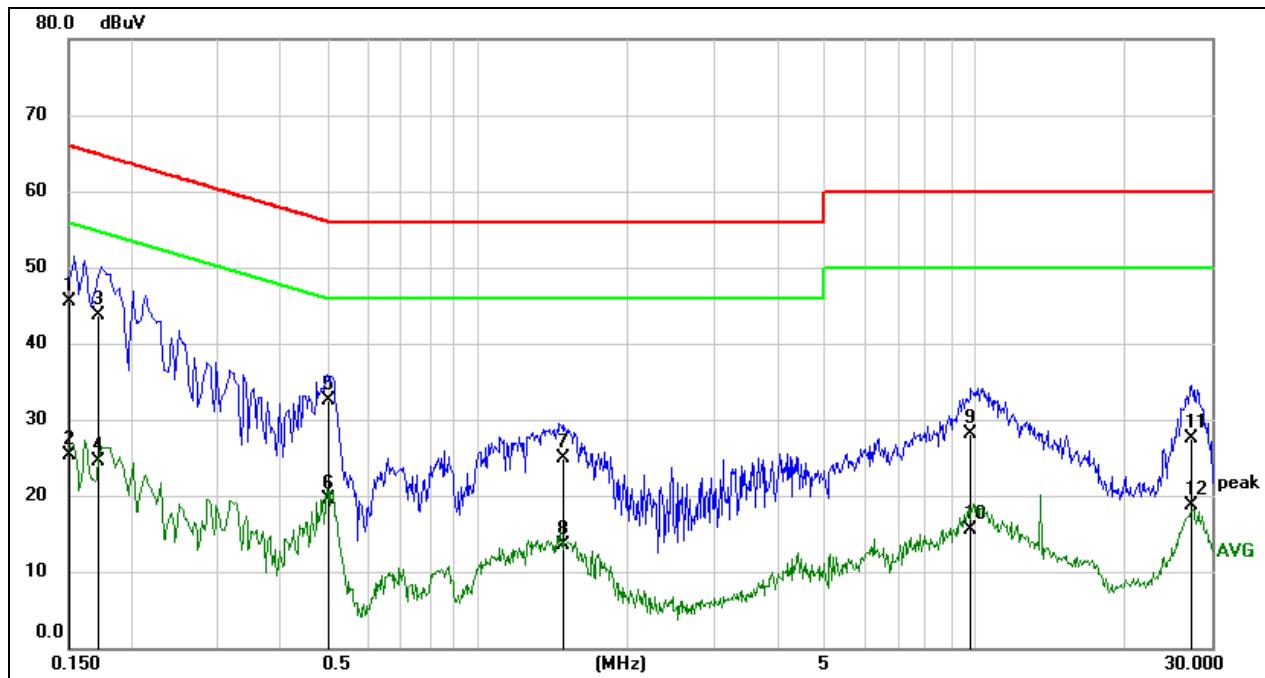


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1507	35.85	9.59	45.44	65.96	-20.52	QP
2	0.1507	15.73	9.59	25.32	55.96	-30.64	AVG
3	0.1720	34.11	9.59	43.70	64.86	-21.16	QP
4	0.1720	14.85	9.59	24.44	54.86	-30.42	AVG
5	0.5006	23.00	9.60	32.60	56.00	-23.40	QP
6	0.5006	9.95	9.60	19.55	46.00	-26.45	AVG
7	1.4964	15.29	9.62	24.91	56.00	-31.09	QP
8	1.4964	3.92	9.62	13.54	46.00	-32.46	AVG
9	9.8781	18.29	9.72	28.01	60.00	-31.99	QP
10	9.8781	5.88	9.72	15.60	50.00	-34.40	AVG
11	27.3417	17.74	9.74	27.48	60.00	-32.52	QP
12	27.3417	9.00	9.74	18.74	50.00	-31.26	AVG

**Note:**

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Test Mode:	8DPSK	Channel:	2480 MHz
Line	N		

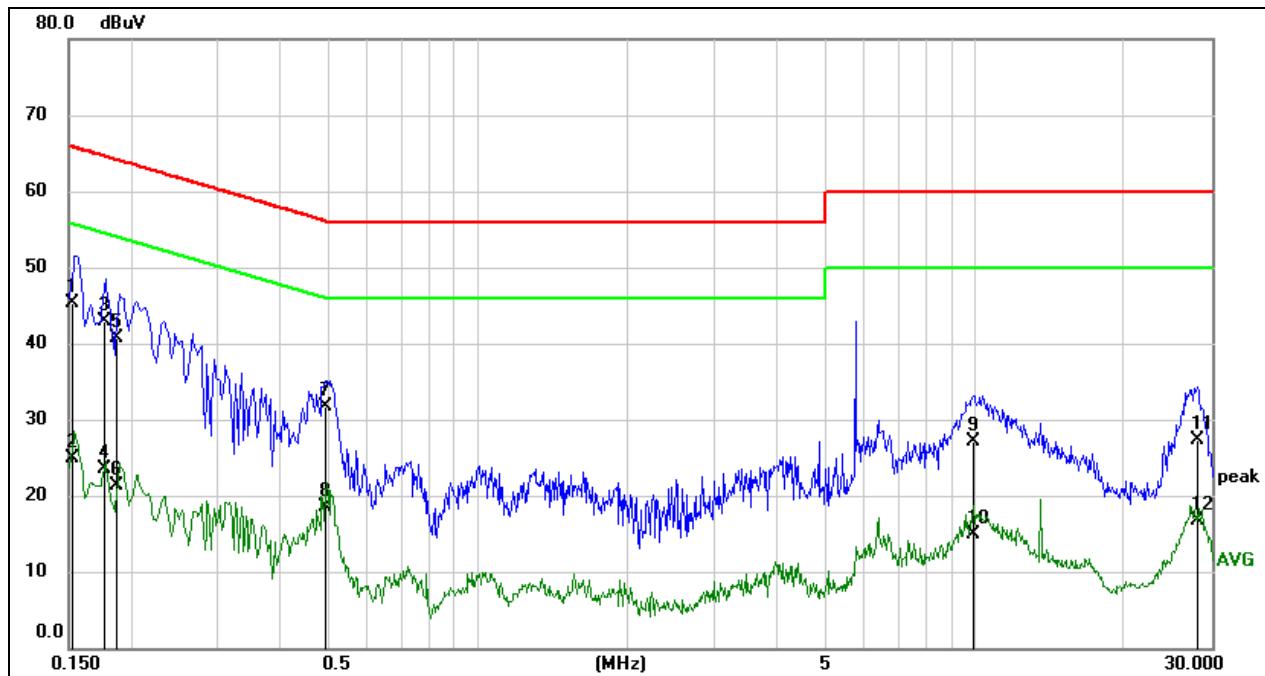

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1517	35.83	9.49	45.32	65.91	-20.59	QP
2	0.1517	15.41	9.49	24.90	55.91	-31.01	AVG
3	0.1762	33.31	9.54	42.85	64.66	-21.81	QP
4	0.1762	14.01	9.54	23.55	54.66	-31.11	AVG
5	0.1867	31.05	9.56	40.61	64.18	-23.57	QP
6	0.1867	11.71	9.56	21.27	54.18	-32.91	AVG
7	0.4927	22.14	9.50	31.64	56.12	-24.48	QP
8	0.4927	9.03	9.50	18.53	46.12	-27.59	AVG
9	9.9549	17.54	9.62	27.16	60.00	-32.84	QP
10	9.9549	5.29	9.62	14.91	50.00	-35.09	AVG
11	28.1892	17.66	9.74	27.40	60.00	-32.60	QP
12	28.1892	7.06	9.74	16.80	50.00	-33.20	AVG

**Note:**

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

## 10. ANTENNA REQUIREMENT

### REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DESCRIPTION

Pass


## 11. TEST DATA


### 11.1. APPENDIX A: 20 DB BANDWIDTH

#### 11.1.1. Test Result

Test Mode	Antenna	Channel	20db BW[MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant1	2402	0.95	2401.53	2402.48	PASS
		2441	1.00	2440.49	2441.49	PASS
		2480	0.96	2479.53	2480.49	PASS
2DH5	Ant1	2402	1.29	2401.36	2402.65	PASS
		2441	1.29	2440.36	2441.65	PASS
		2480	1.32	2479.34	2480.66	PASS
3DH5	Ant1	2402	1.29	2401.35	2402.64	PASS
		2441	1.30	2440.35	2441.65	PASS
		2480	1.31	2479.34	2480.65	PASS

### 11.1.2. Test Graphs

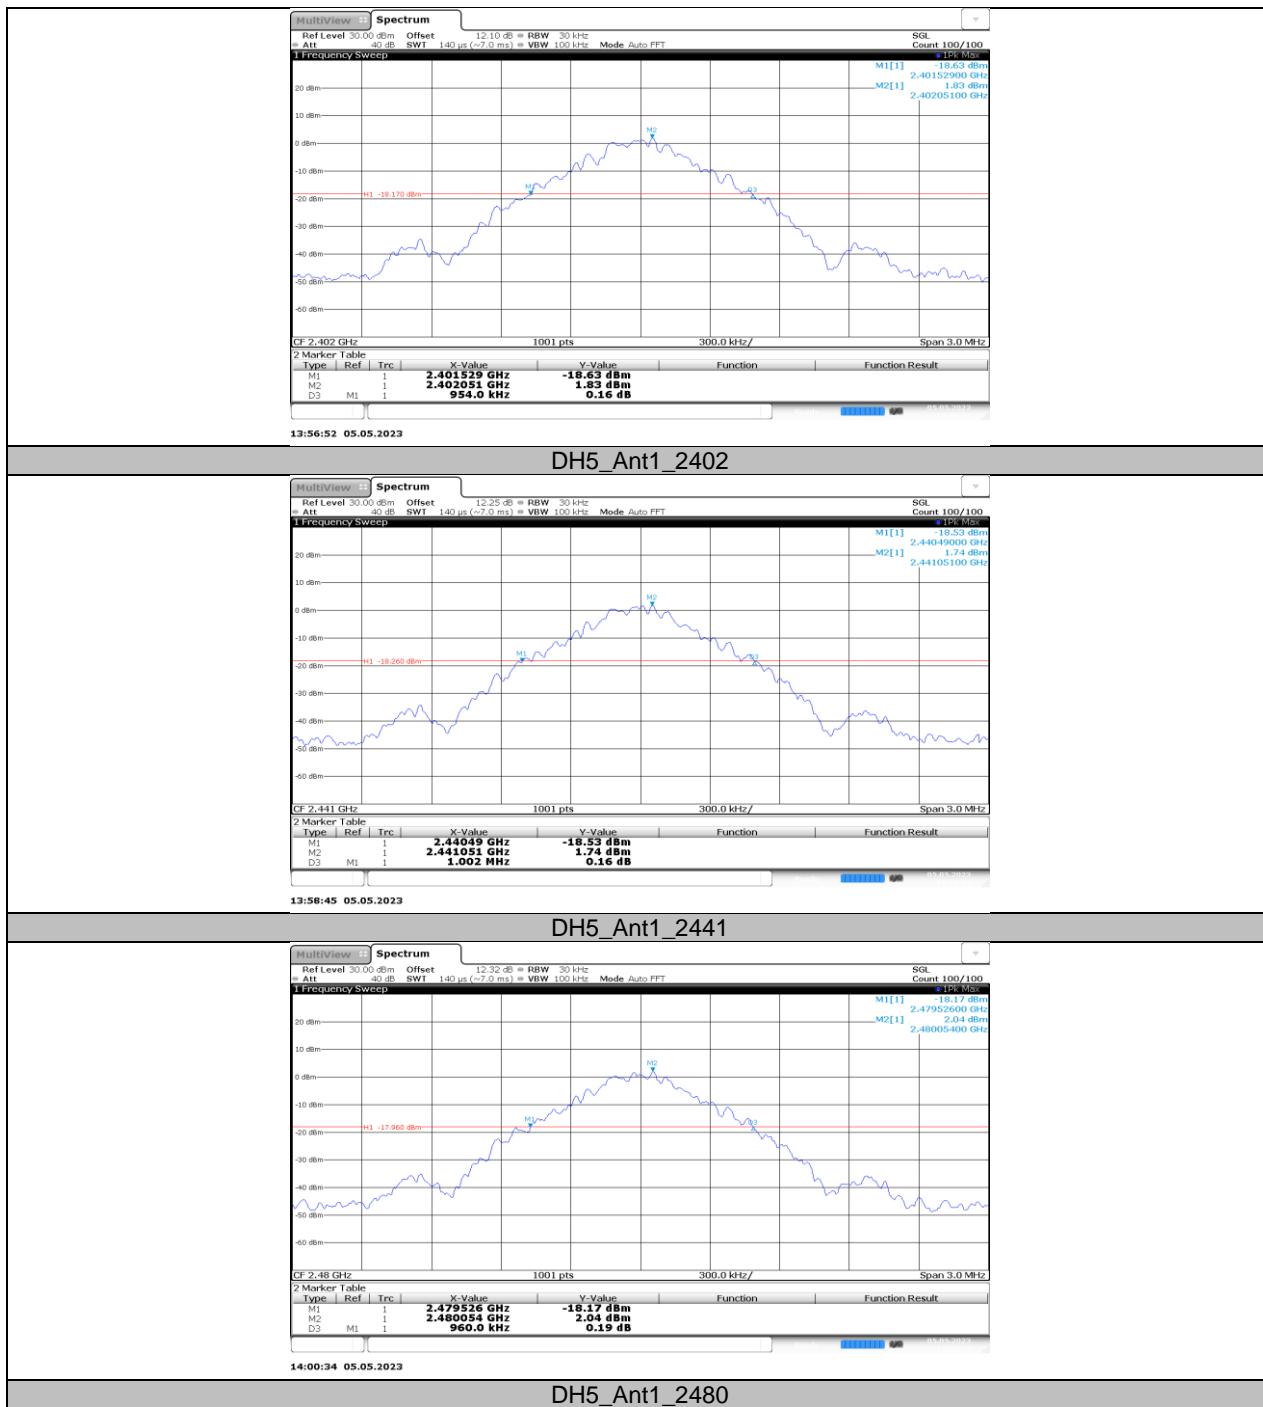

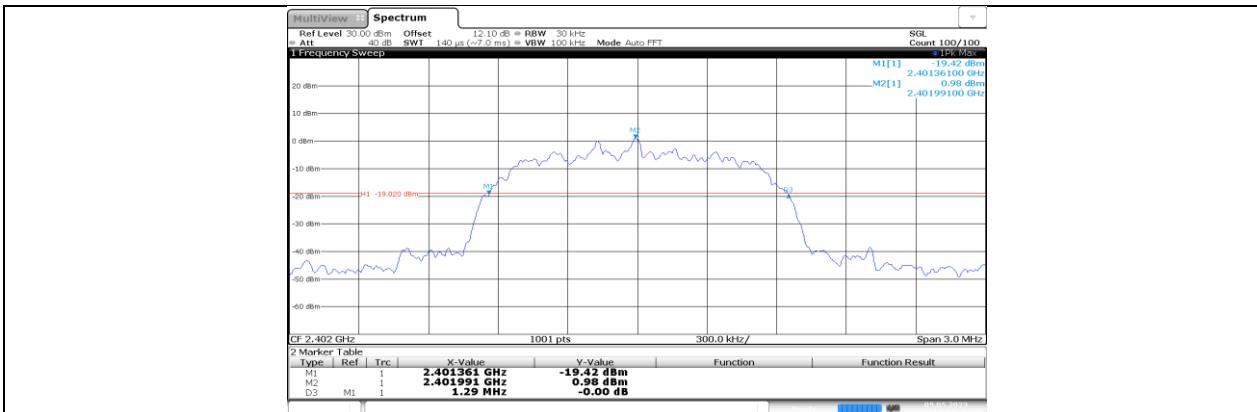

14:03:26 05.05.2023

2DH5\_Ant1\_2402




14:04:49 05.05.2023

2DH5 Ant1 2441



14:06:21 05.05.2023

2DH5 Ant1 2480

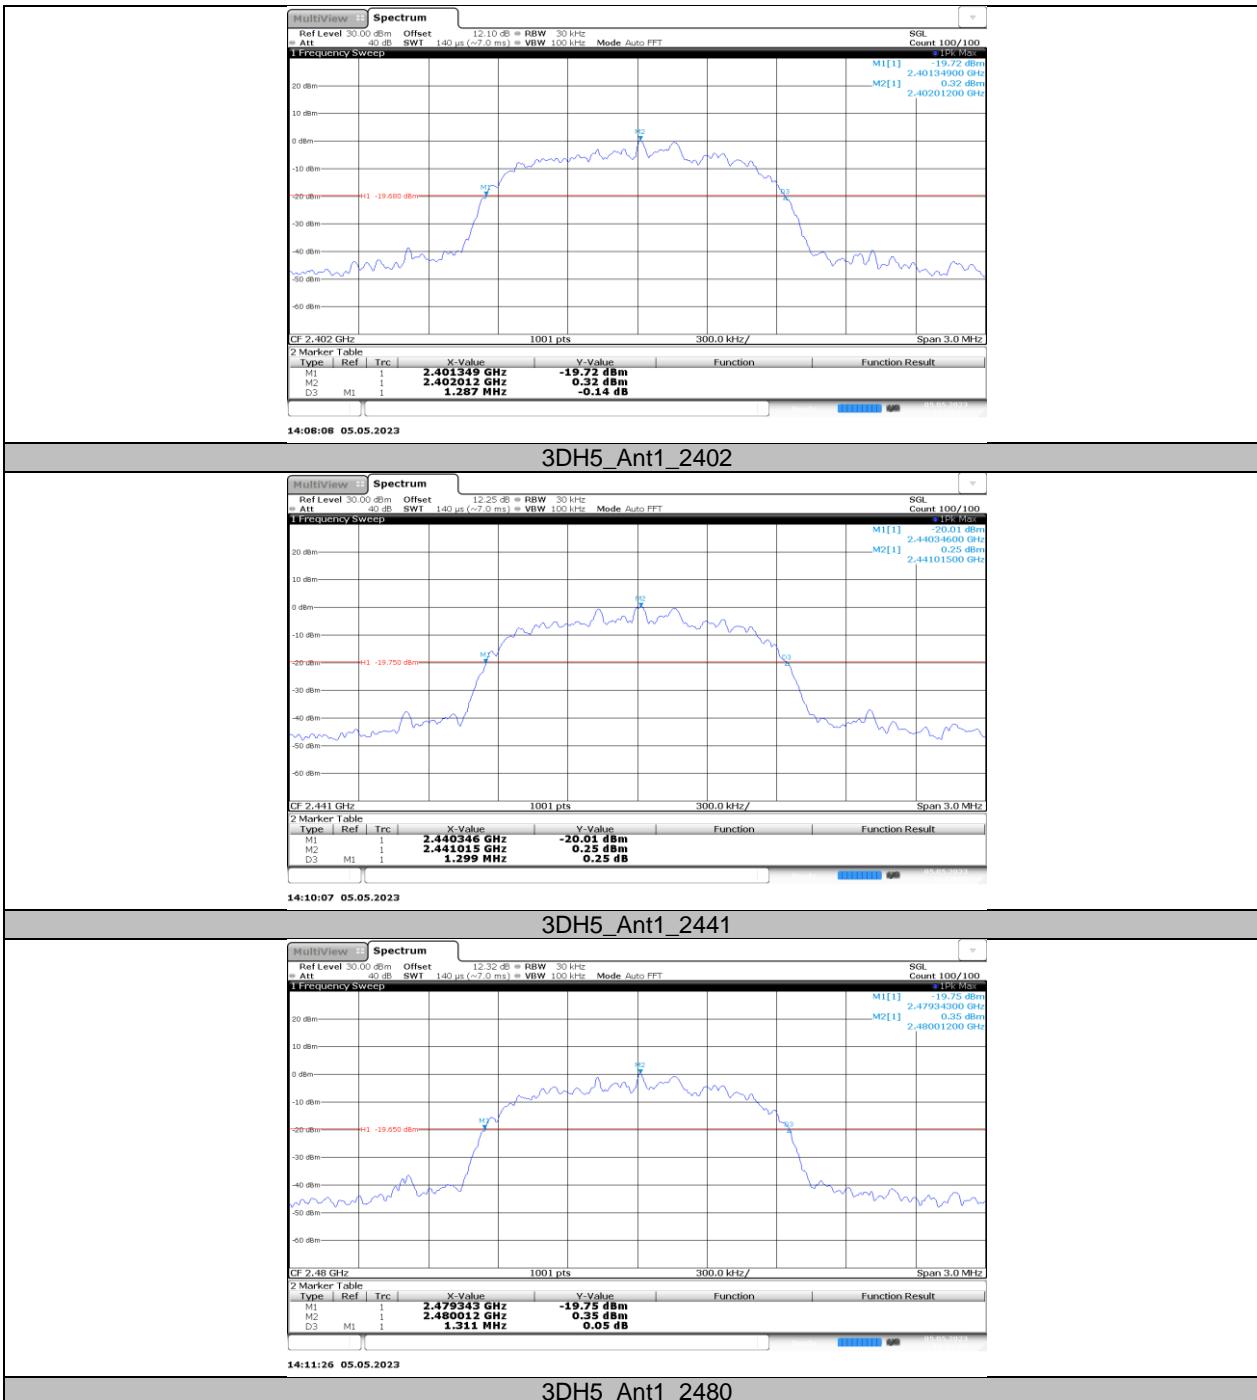



## 11.2. APPENDIX B: 99% OCCUPIED BANDWIDTH


### 11.2.1. Test Result

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant1	2402	0.917	2401.5400	2402.4568	PASS
		2441	0.918	2440.5381	2441.4565	PASS
		2480	0.921	2479.5350	2480.4556	PASS
2DH5	Ant1	2402	1.175	2401.4059	2402.5812	PASS
		2441	1.18	2440.4050	2441.5846	PASS
		2480	1.19	2479.4041	2480.5943	PASS
3DH5	Ant1	2402	1.175	2401.4099	2402.5849	PASS
		2441	1.188	2440.4045	2441.5927	PASS
		2480	1.183	2479.4056	2480.5882	PASS

## 11.2.2. Test Graphs

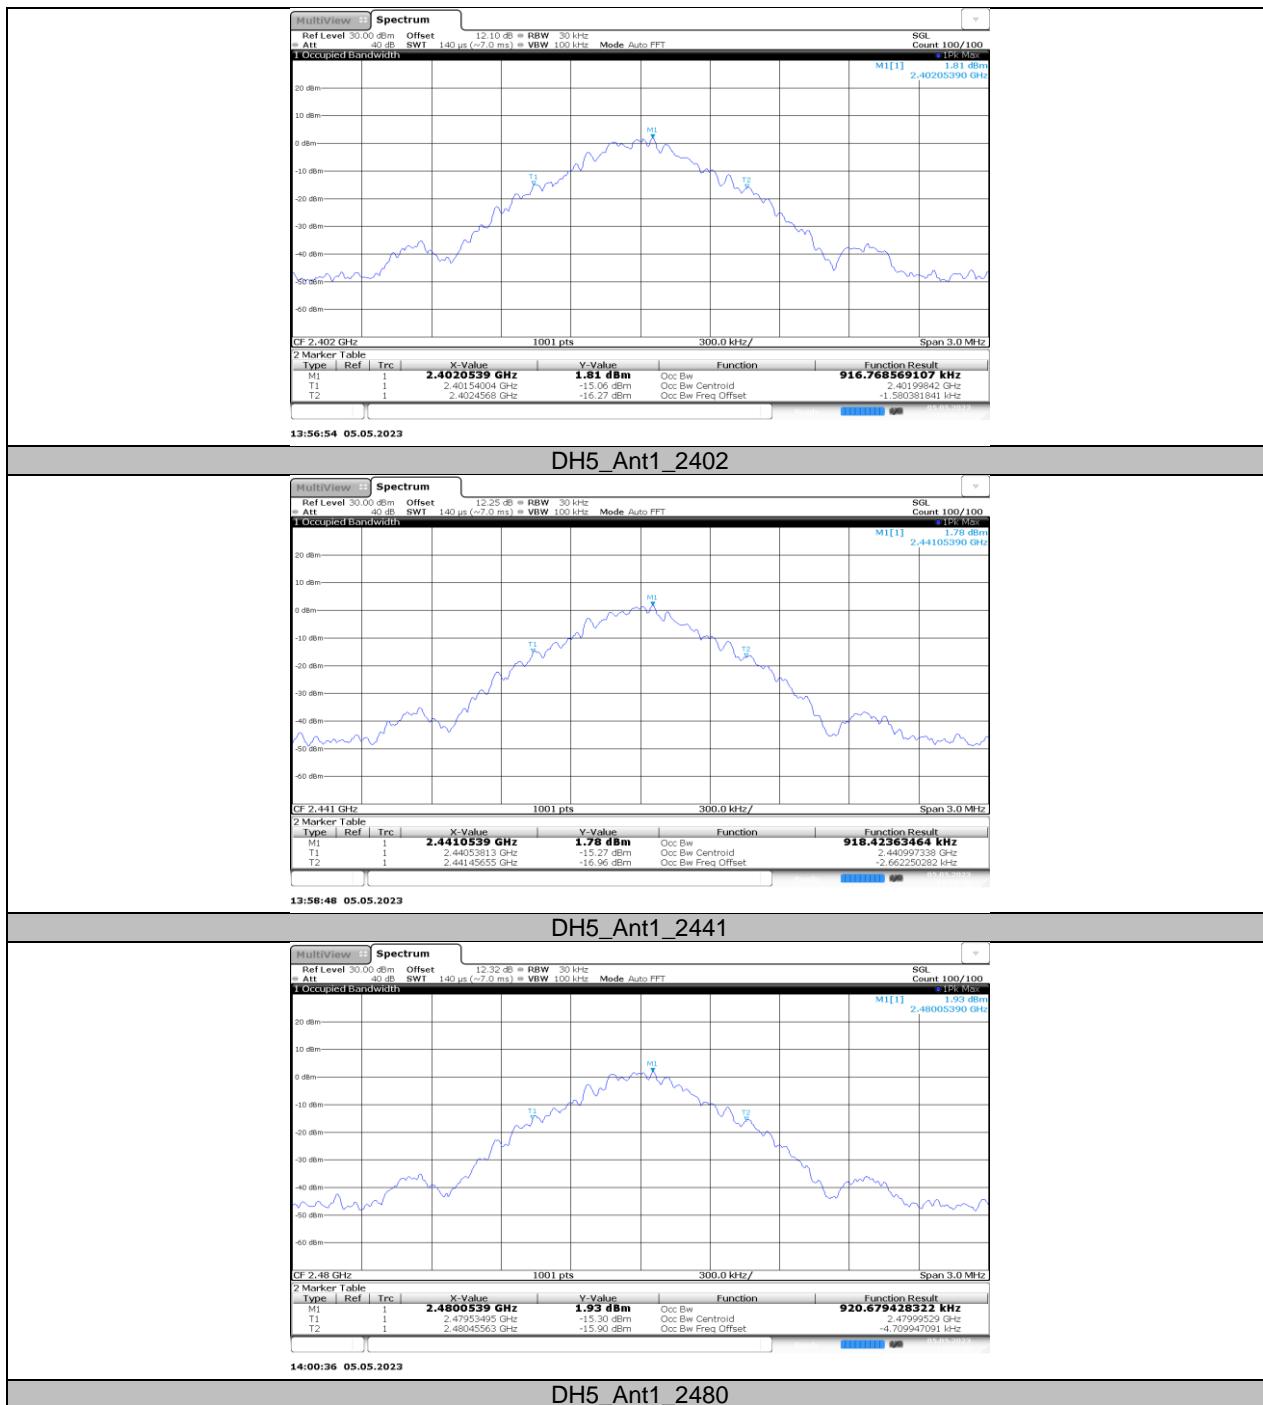

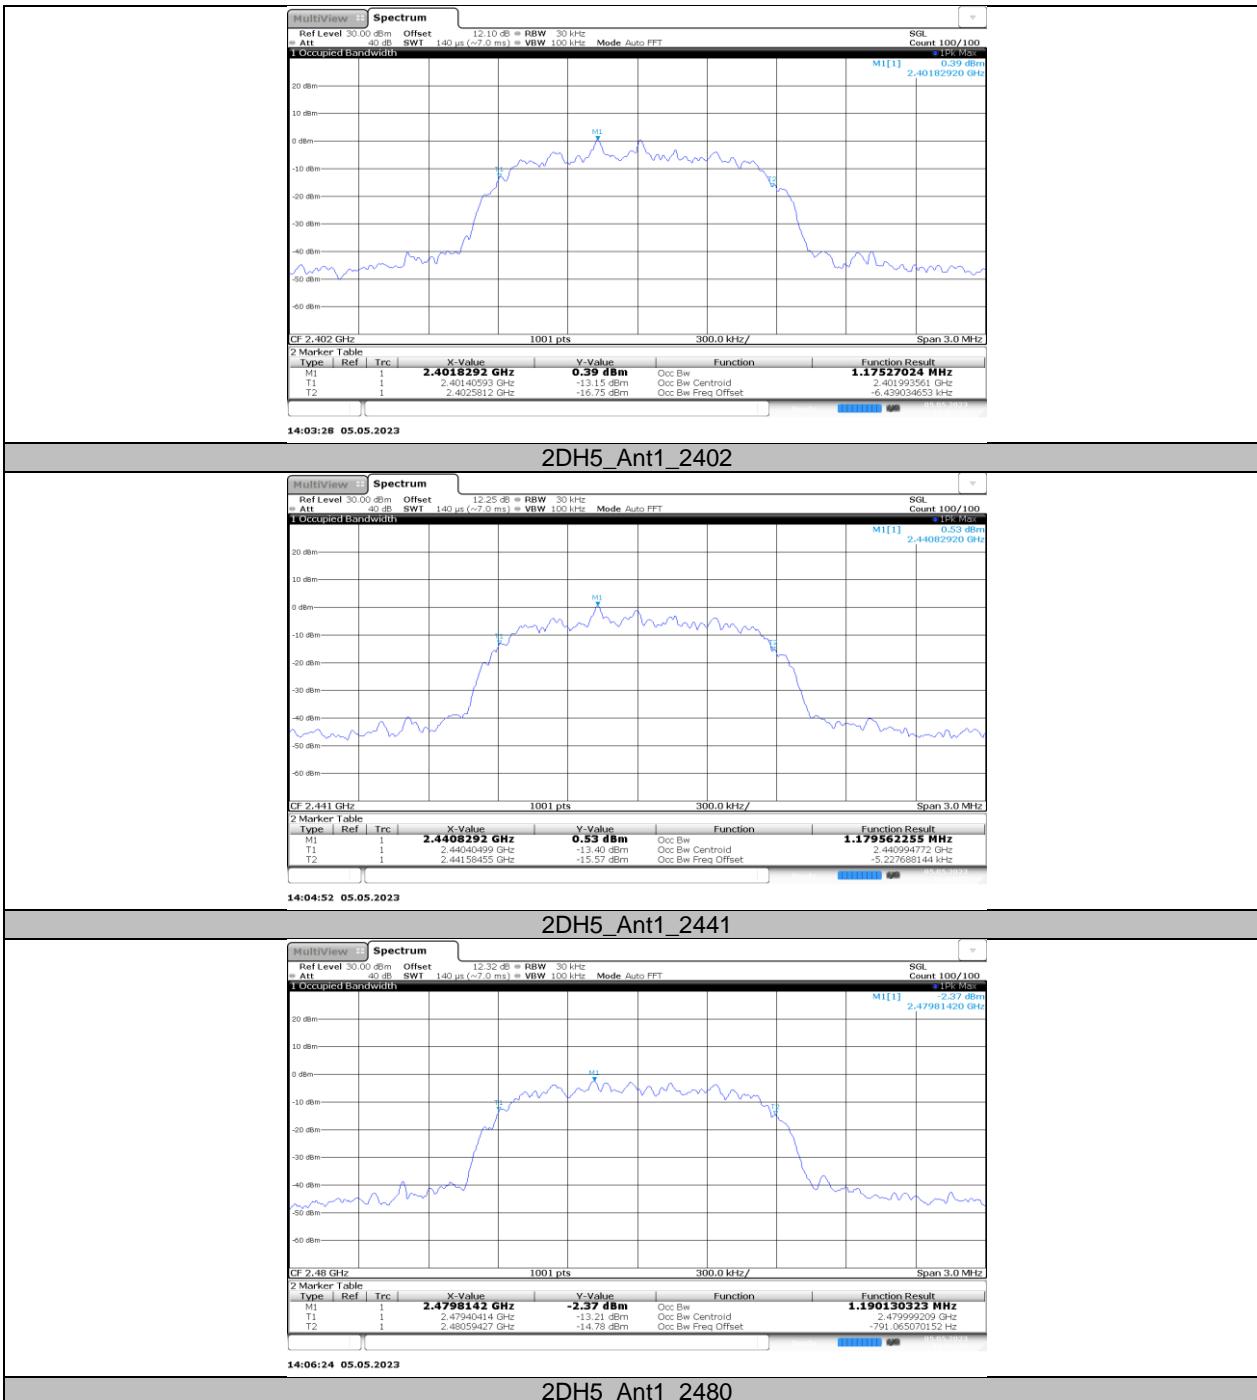

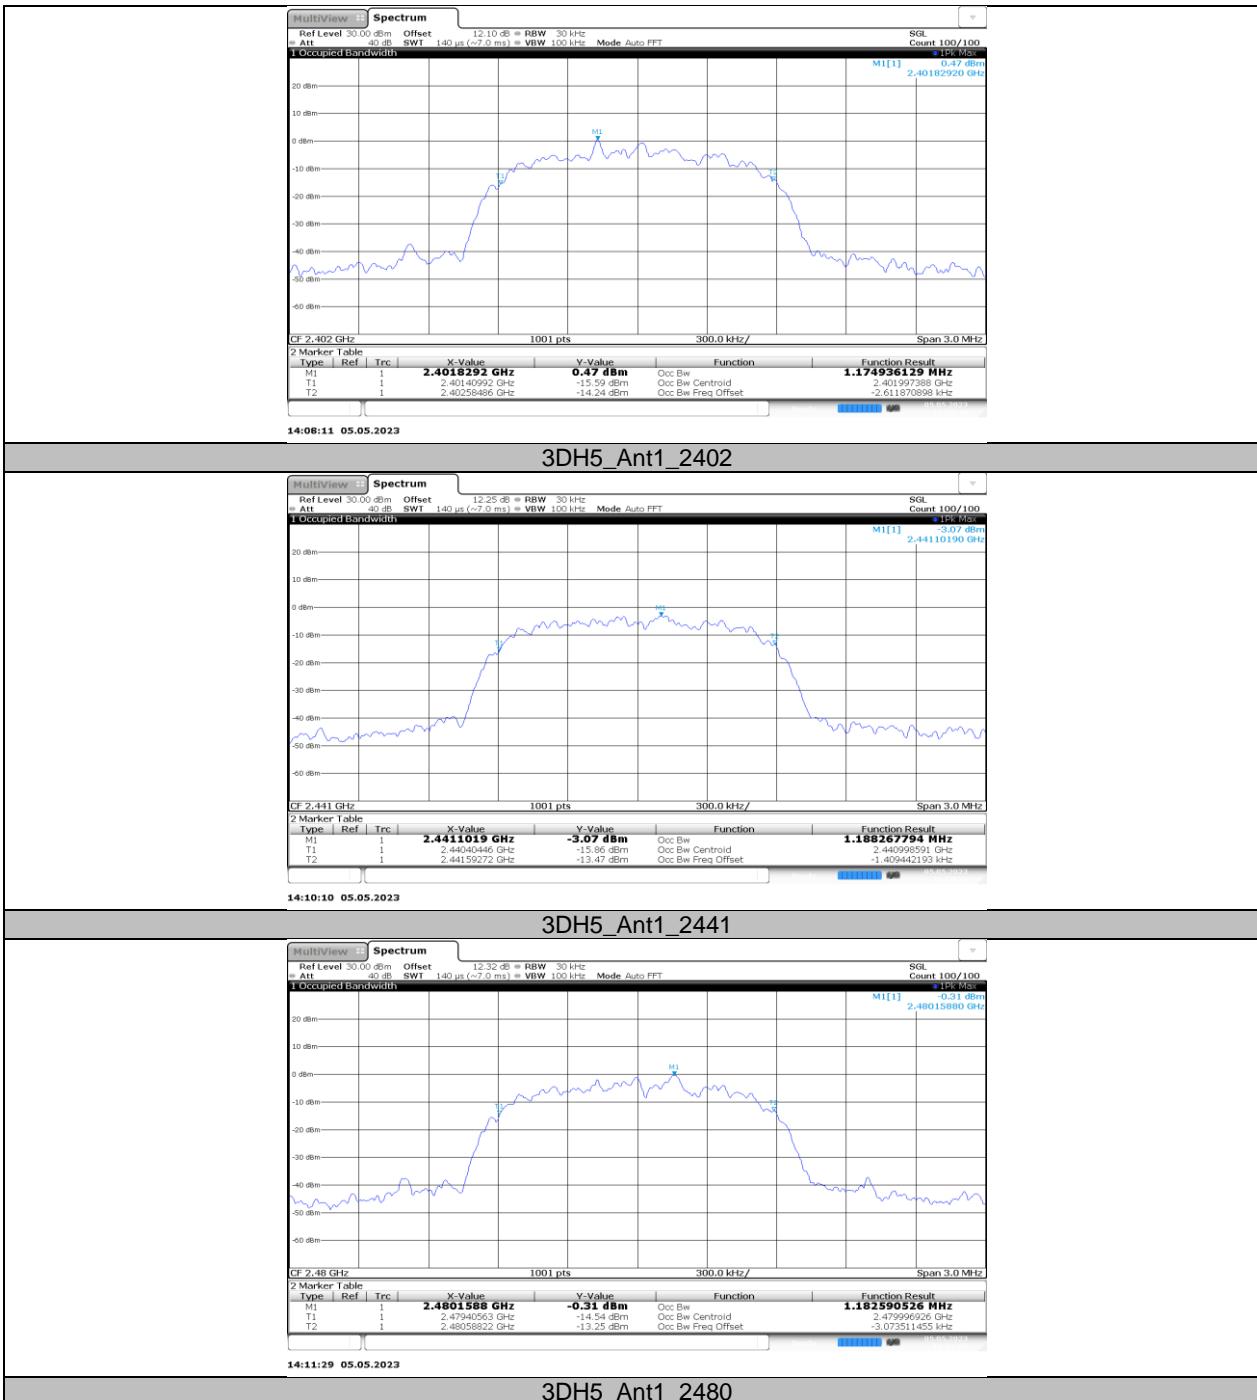

## 11.3. APPENDIX C: MAXIMUM PEAK CONDUCTED OUTPUT POWER

### 11.3.1. Test Result


Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	5.09	≤30	PASS
		2441	5.03	≤30	PASS
		2480	5.34	≤30	PASS
2DH5	Ant1	2402	5.77	≤21	PASS
		2441	5.73	≤21	PASS
		2480	6.05	≤21	PASS
3DH5	Ant1	2402	6.24	≤21	PASS
		2441	6.15	≤21	PASS
		2480	6.46	≤21	PASS

## 11.4. APPENDIX D: CARRIER FREQUENCY SEPARATION

### 11.4.1. Test Result

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.008	≥1.000	PASS
2DH5	Ant1	Hop	1.120	≥0.880	PASS
3DH5	Ant1	Hop	1.128	≥0.873	PASS

## 11.4.2. Test Graphs

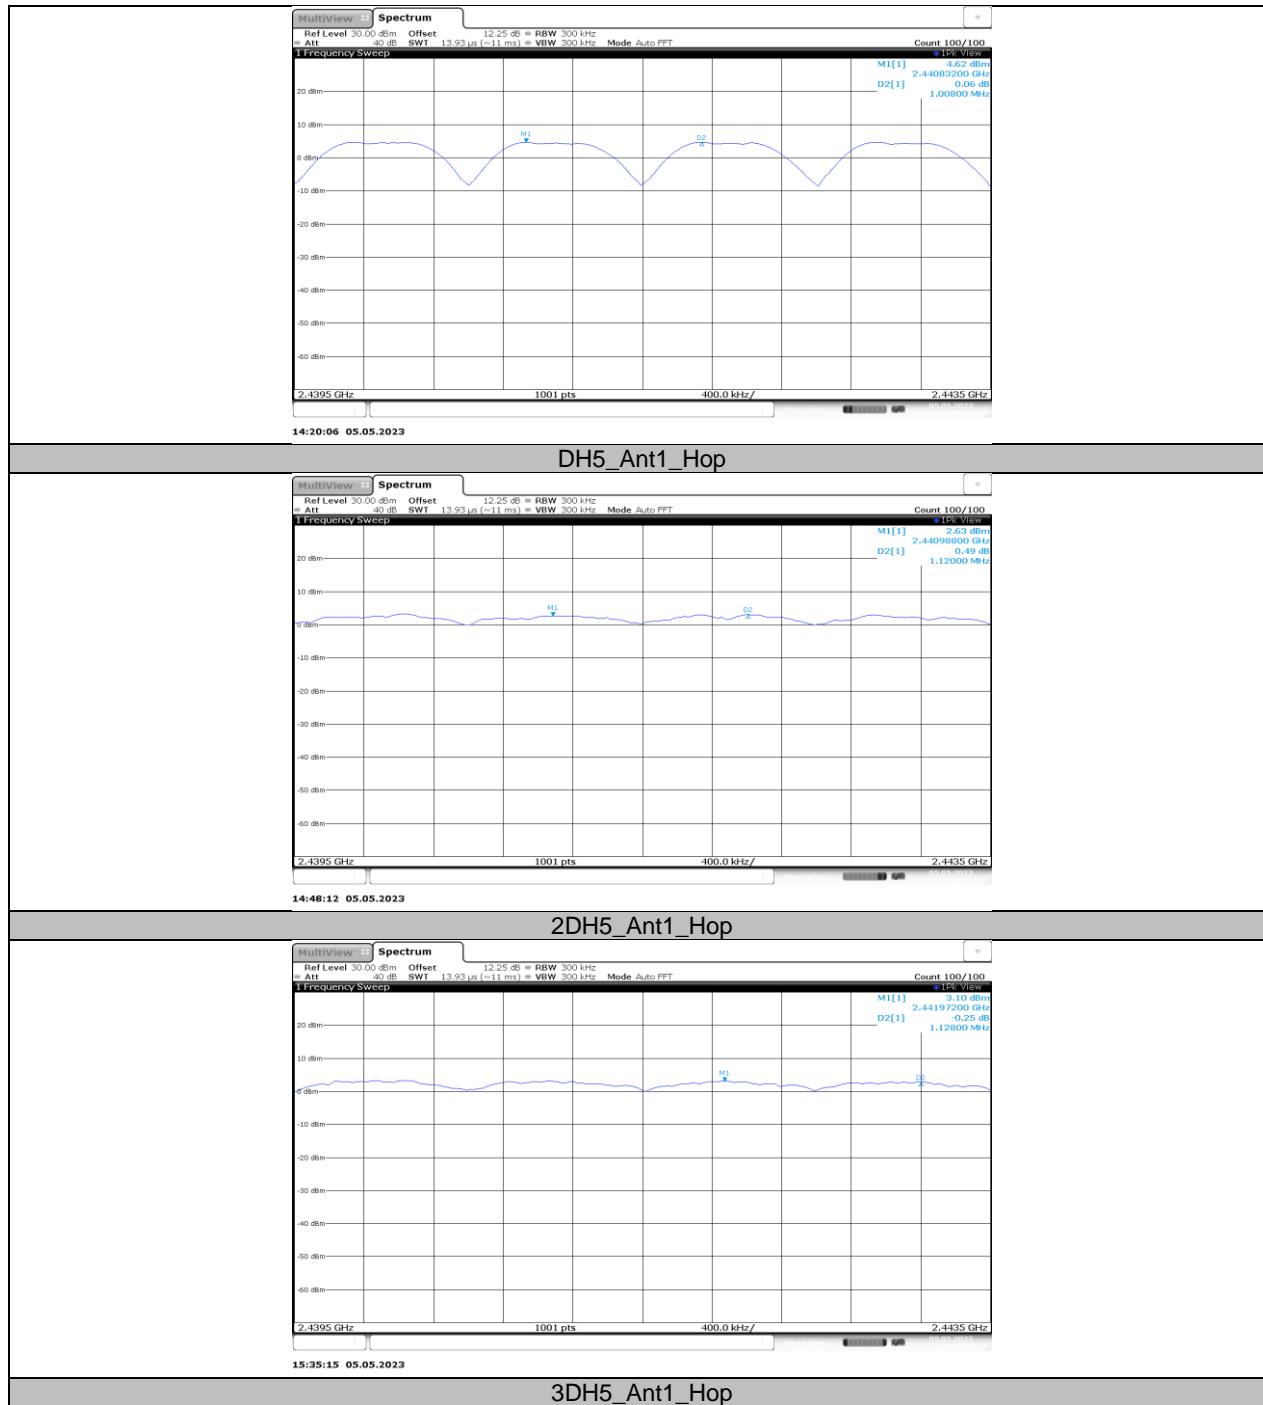



## 11.5. APPENDIX E: TIME OF OCCUPANCY


### 11.5.1. Test Result

FHSS Mode						
Test Mode	Antenna	Channel	Burst Width	Result[s]	Limit[s]	Verdict
			[ms]			
DH1	Ant1	Hop	0.366	0.117	≤0.4	PASS
DH3	Ant1	Hop	1.613	0.258	≤0.4	PASS
DH5	Ant1	Hop	2.857	0.305	≤0.4	PASS
2DH1	Ant1	Hop	0.375	0.120	≤0.4	PASS
2DH3	Ant1	Hop	1.625	0.260	≤0.4	PASS
2DH5	Ant1	Hop	2.868	0.306	≤0.4	PASS
3DH1	Ant1	Hop	0.375	0.120	≤0.4	PASS
3DH3	Ant1	Hop	1.623	0.260	≤0.4	PASS
3DH5	Ant1	Hop	2.865	0.306	≤0.4	PASS
AFHSS Mode						
Test Mode	Antenna	Channel	Burst Width	Result[s]	Limit[s]	Verdict
			[ms]			
DH1	Ant1	Hop	0.366	0.059	≤0.4	PASS
DH3	Ant1	Hop	1.613	0.129	≤0.4	PASS
DH5	Ant1	Hop	2.857	0.152	≤0.4	PASS
2DH1	Ant1	Hop	0.375	0.060	≤0.4	PASS
2DH3	Ant1	Hop	1.625	0.130	≤0.4	PASS
2DH5	Ant1	Hop	2.868	0.153	≤0.4	PASS
3DH1	Ant1	Hop	0.375	0.060	≤0.4	PASS
3DH3	Ant1	Hop	1.623	0.130	≤0.4	PASS
3DH5	Ant1	Hop	2.865	0.153	≤0.4	PASS

## 11.5.2. Test Graphs

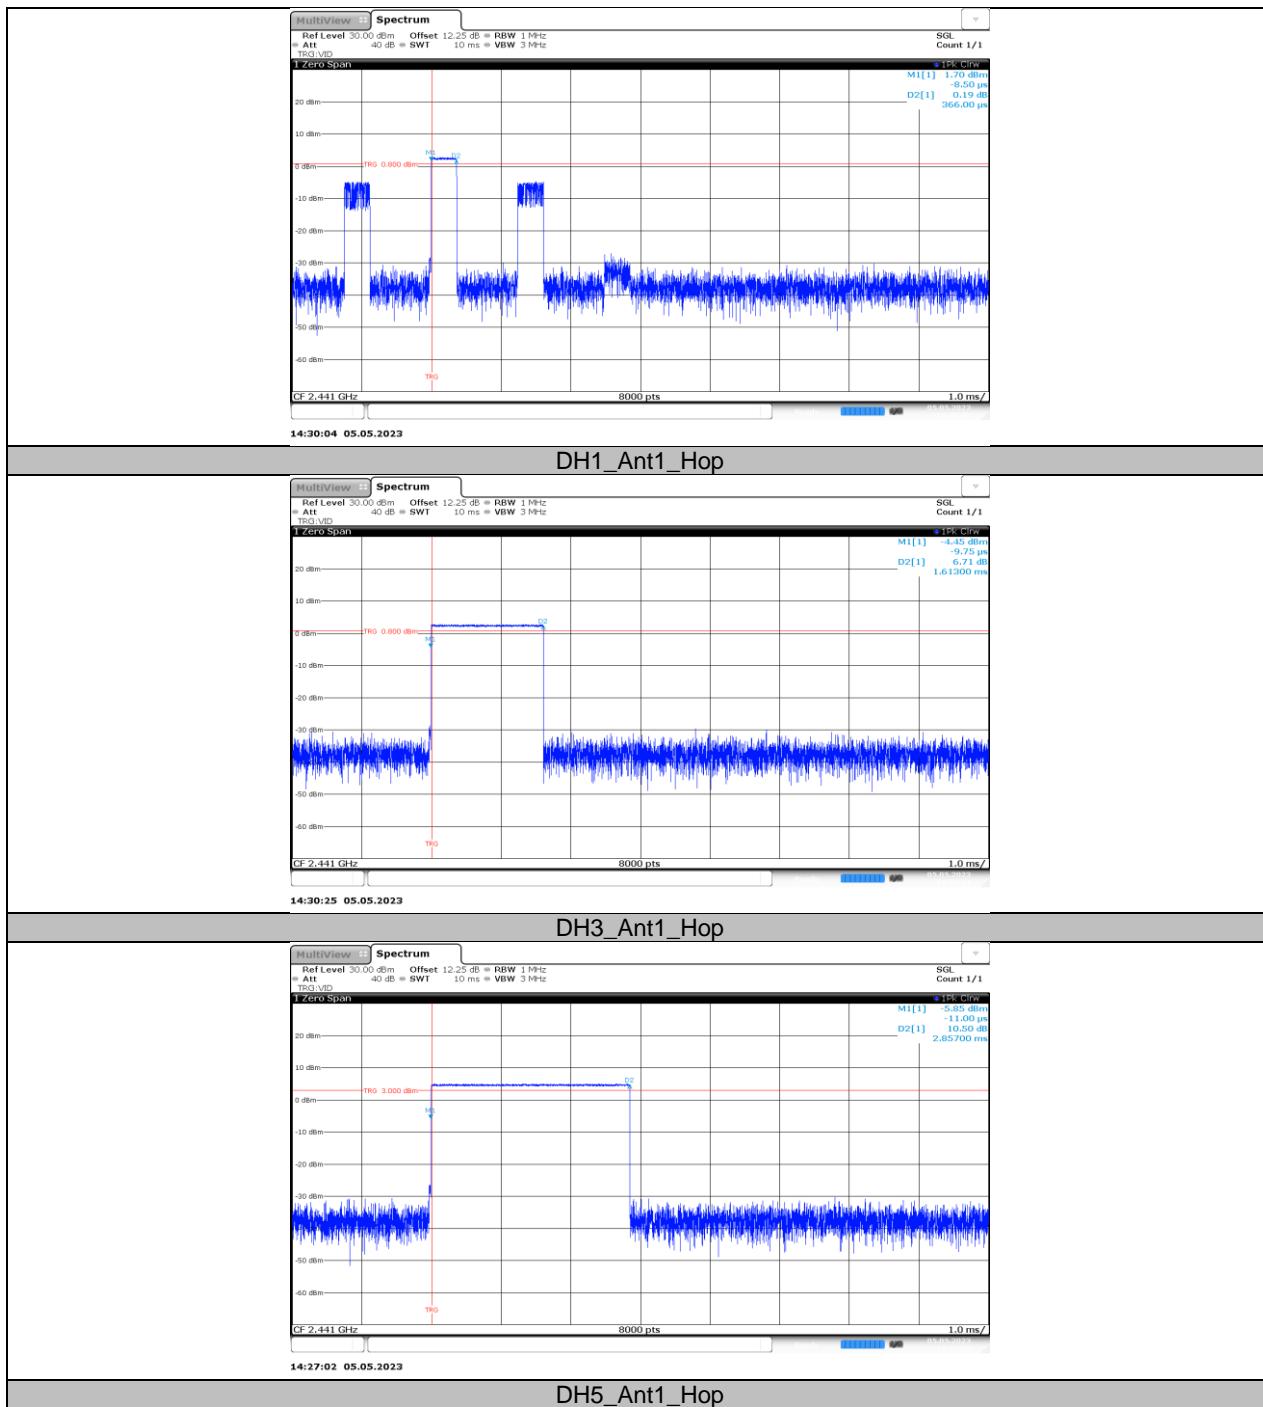

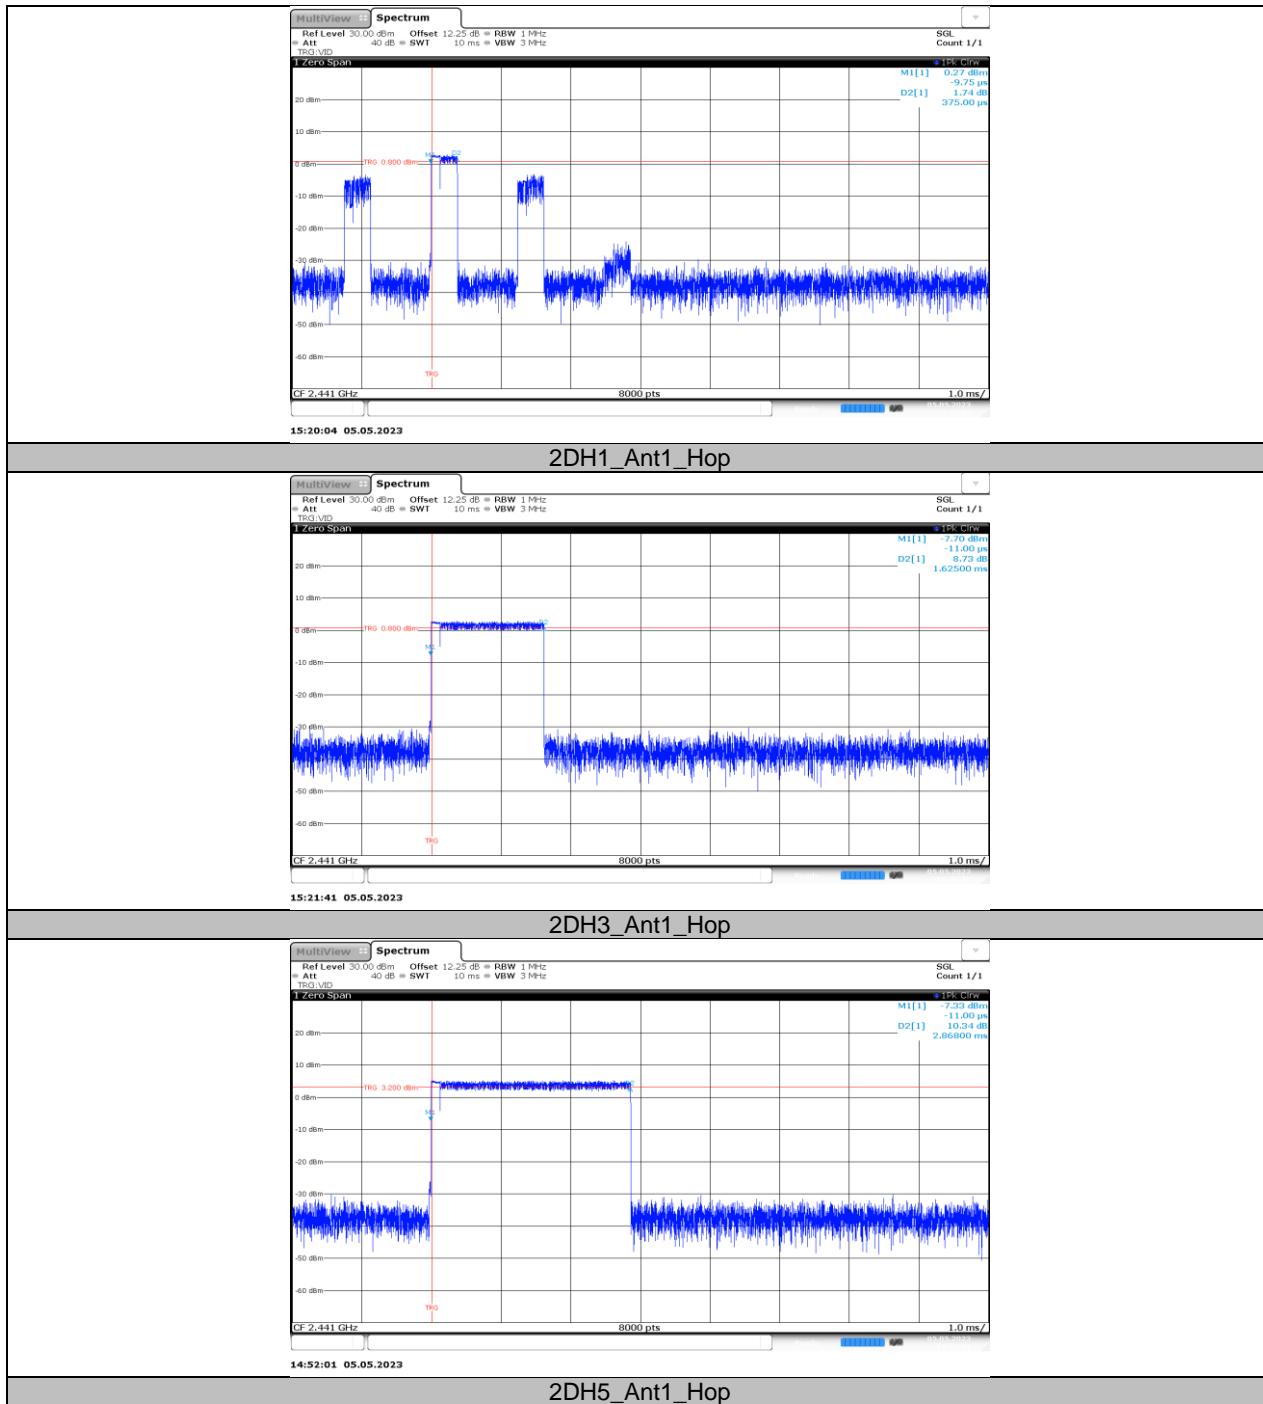

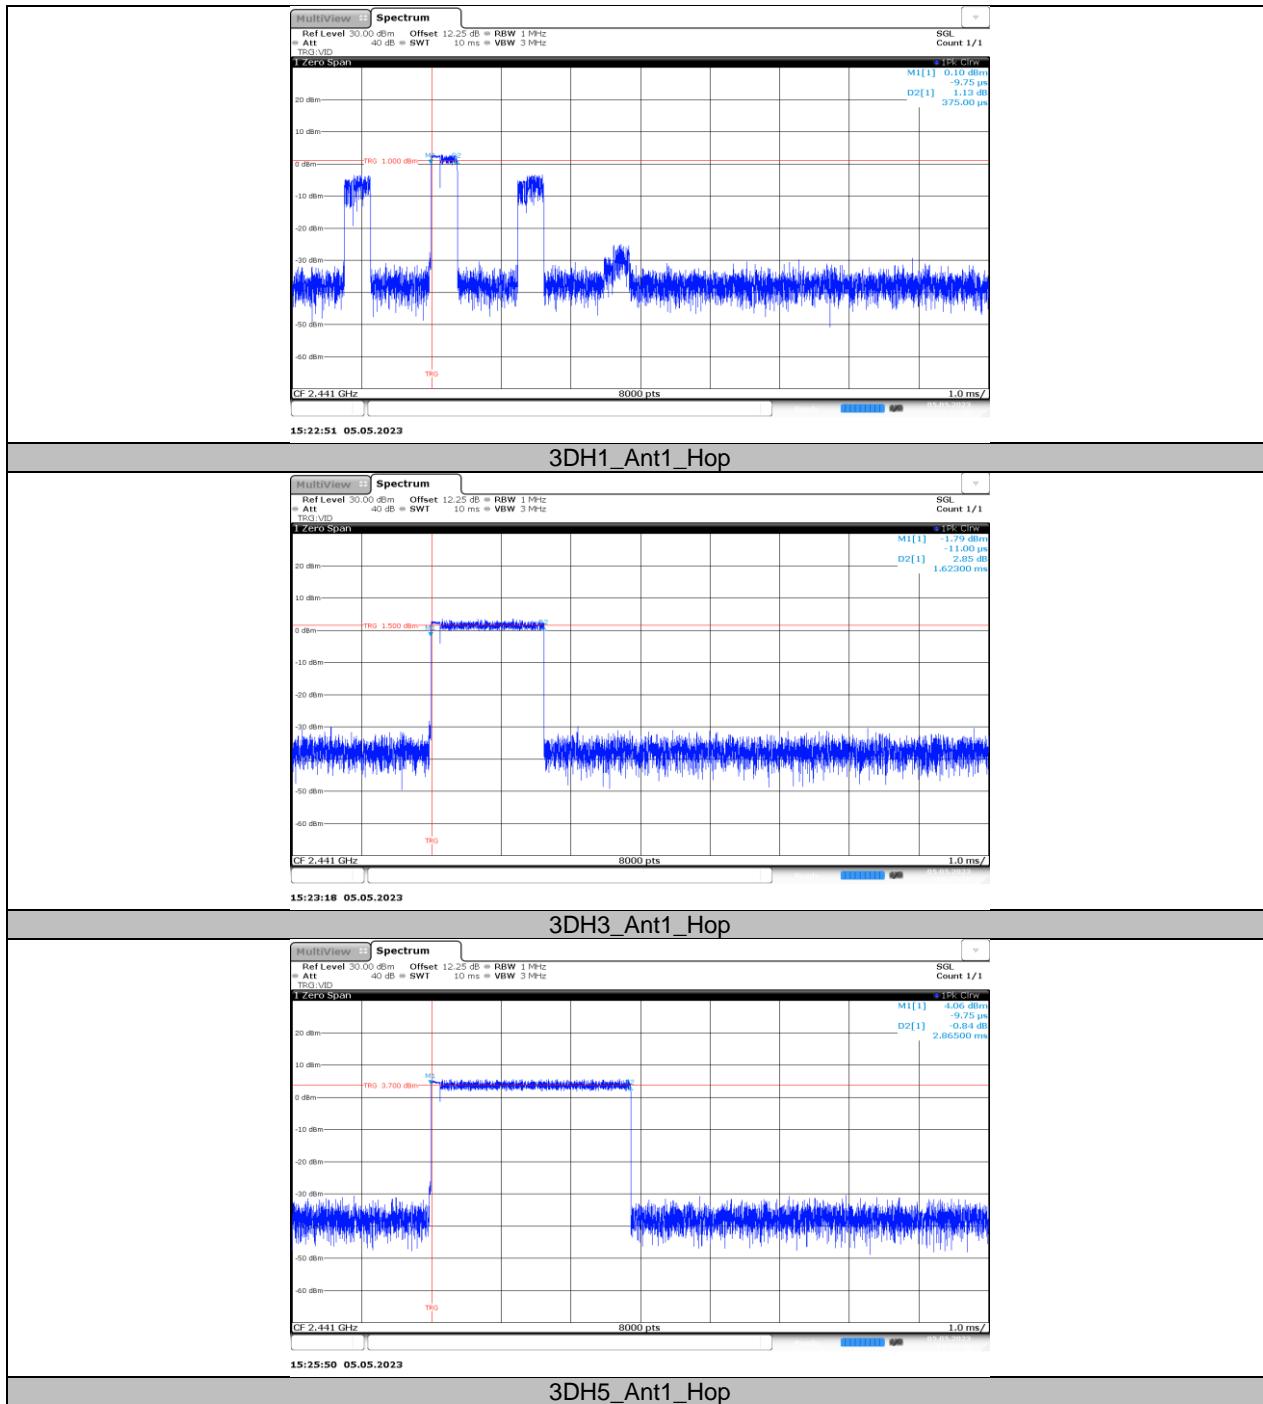


## 11.6. APPENDIX F: NUMBER OF HOPPING CHANNELS

### 11.6.1. Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

## 11.6.2. Test Graphs

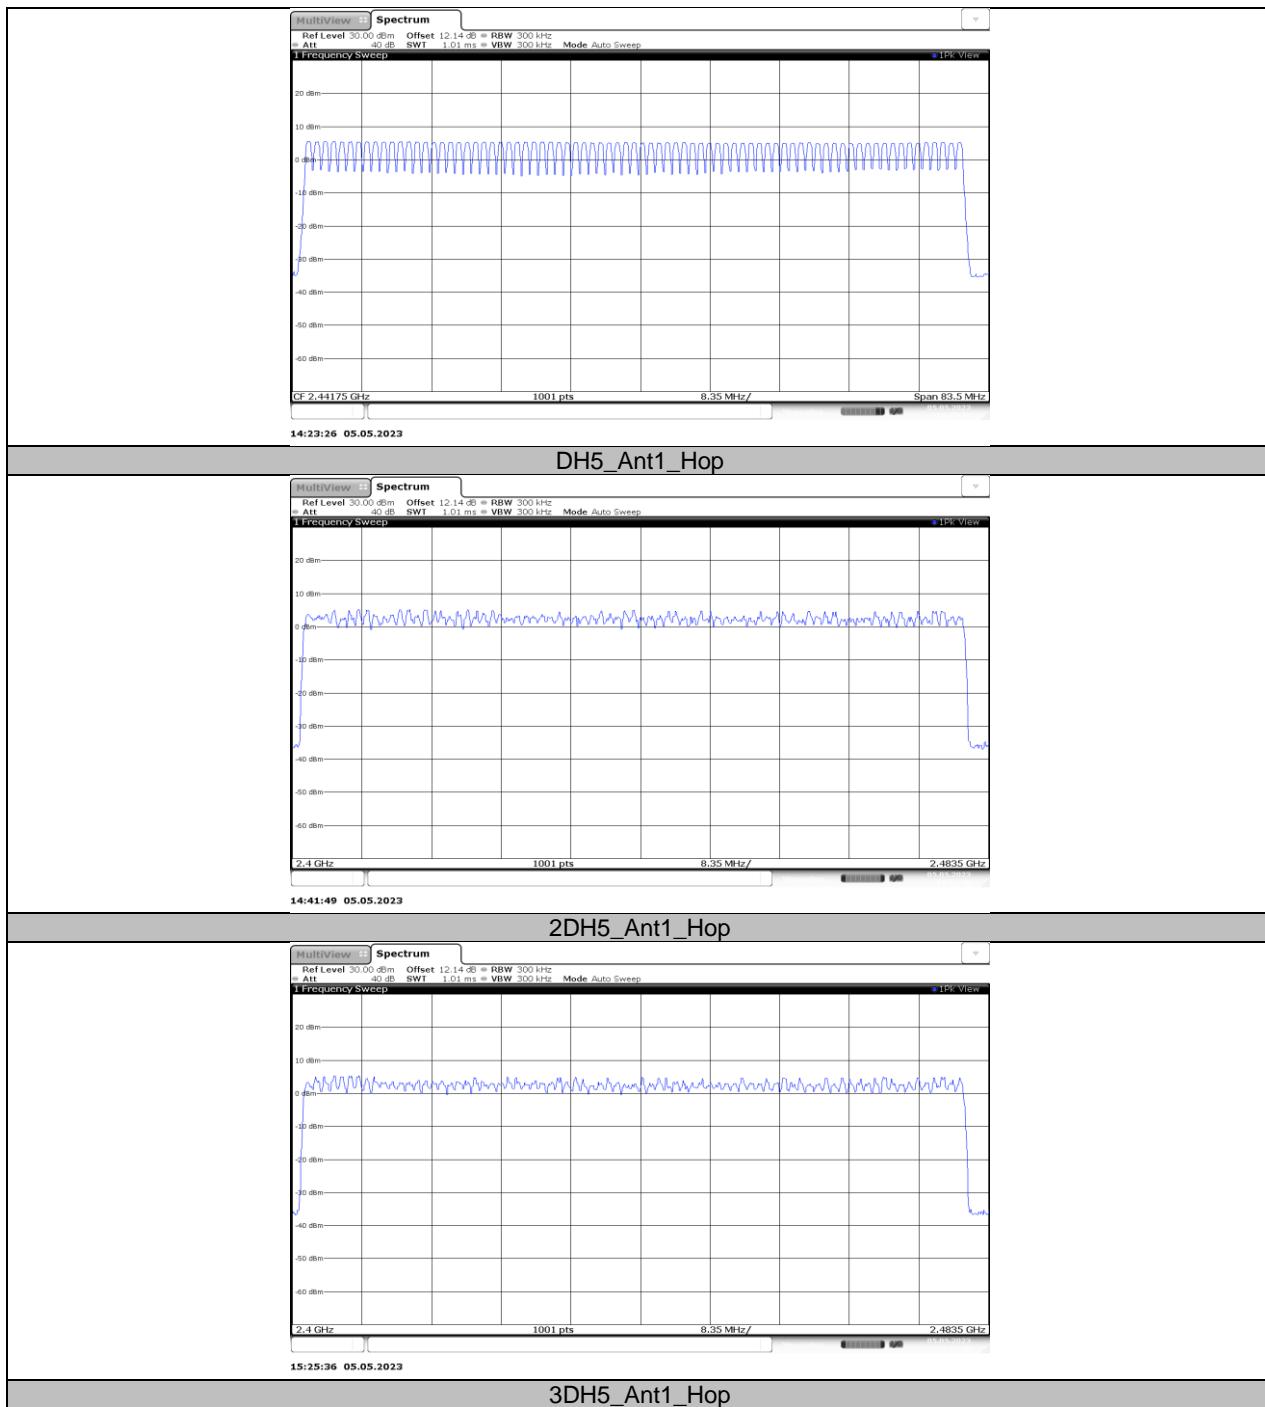



## 11.7. APPENDIX G: BAND EDGE MEASUREMENTS


### 11.7.1. Test Result


Test Mode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	4.66	-45.88	≤-15.34	PASS
		High	2480	5.09	-44.75	≤-14.91	PASS
		Low	Hop_2402	4.73	-48.61	≤-15.27	PASS
		High	Hop_2480	4.58	-46.77	≤-15.42	PASS
2DH5	Ant1	Low	2402	4.50	-46.88	≤-15.5	PASS
		High	2480	4.41	-46.01	≤-15.59	PASS
		Low	Hop_2402	4.48	-48.58	≤-15.52	PASS
		High	Hop_2480	5.00	-44.88	≤-15	PASS
3DH5	Ant1	Low	2402	4.71	-47.43	≤-15.29	PASS
		High	2480	5.14	-47.05	≤-14.86	PASS
		Low	Hop_2402	3.54	-48.16	≤-16.46	PASS
		High	Hop_2480	5.05	-47.64	≤-14.95	PASS

## 11.7.2. Test Graphs

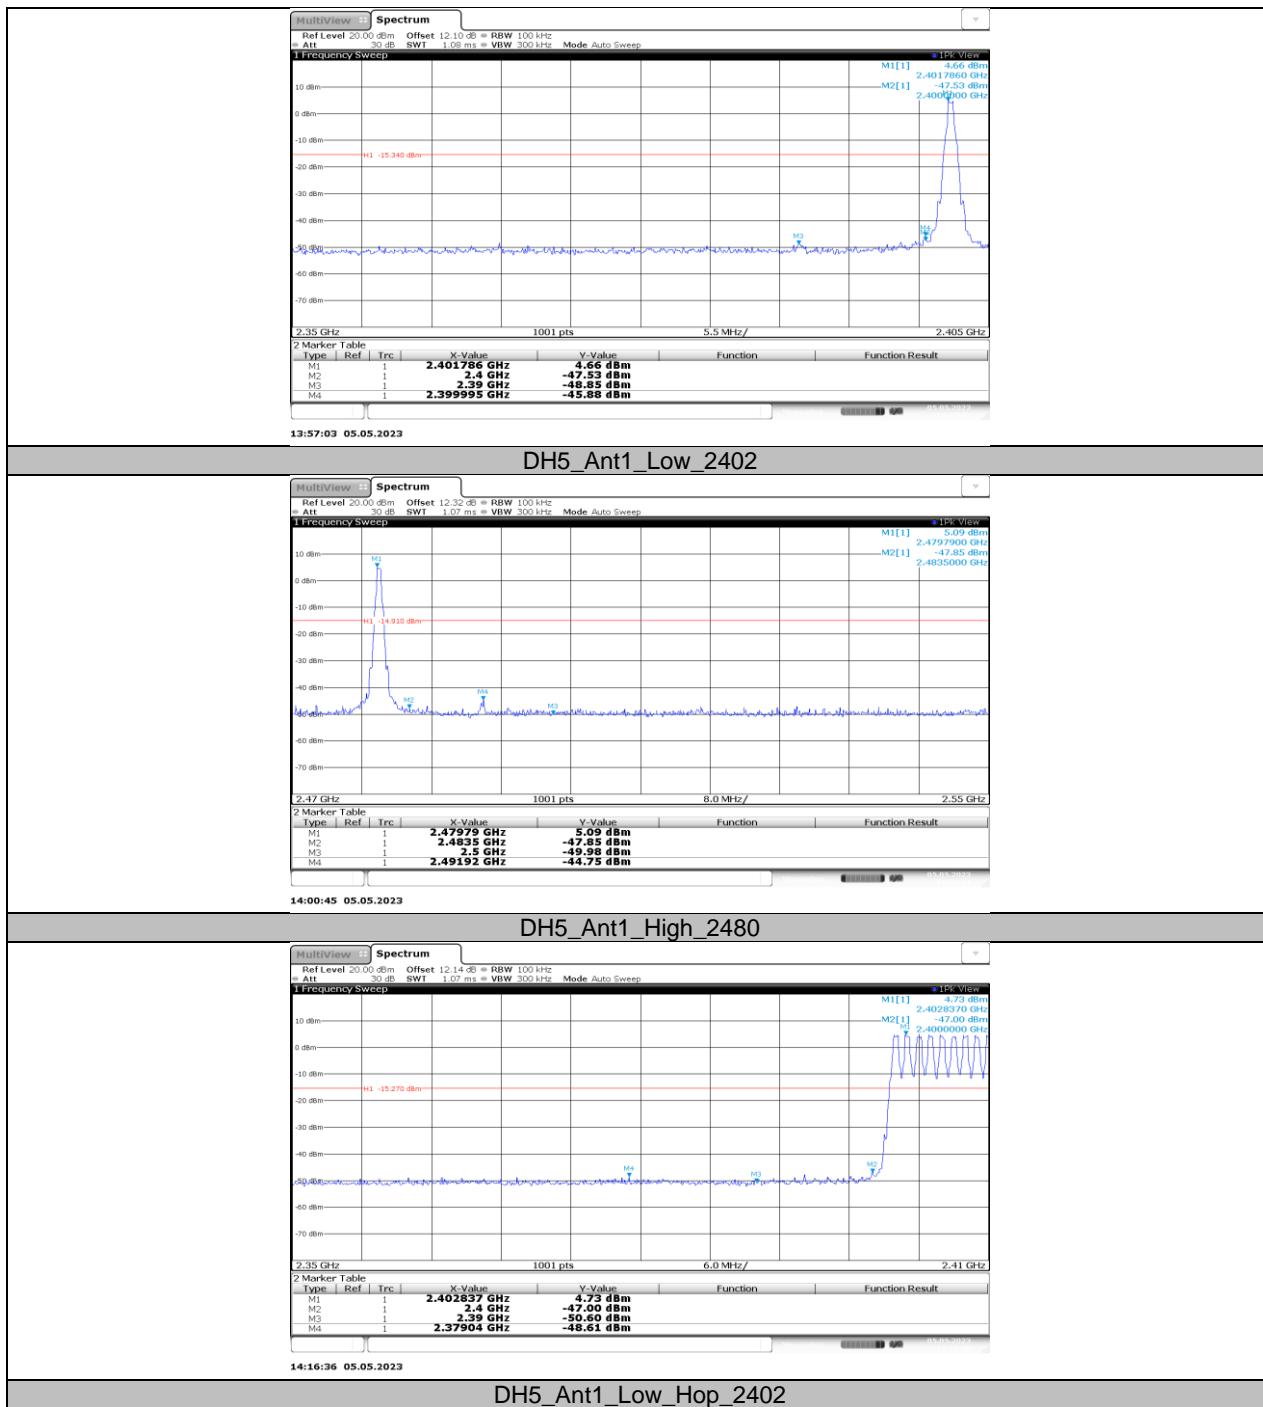

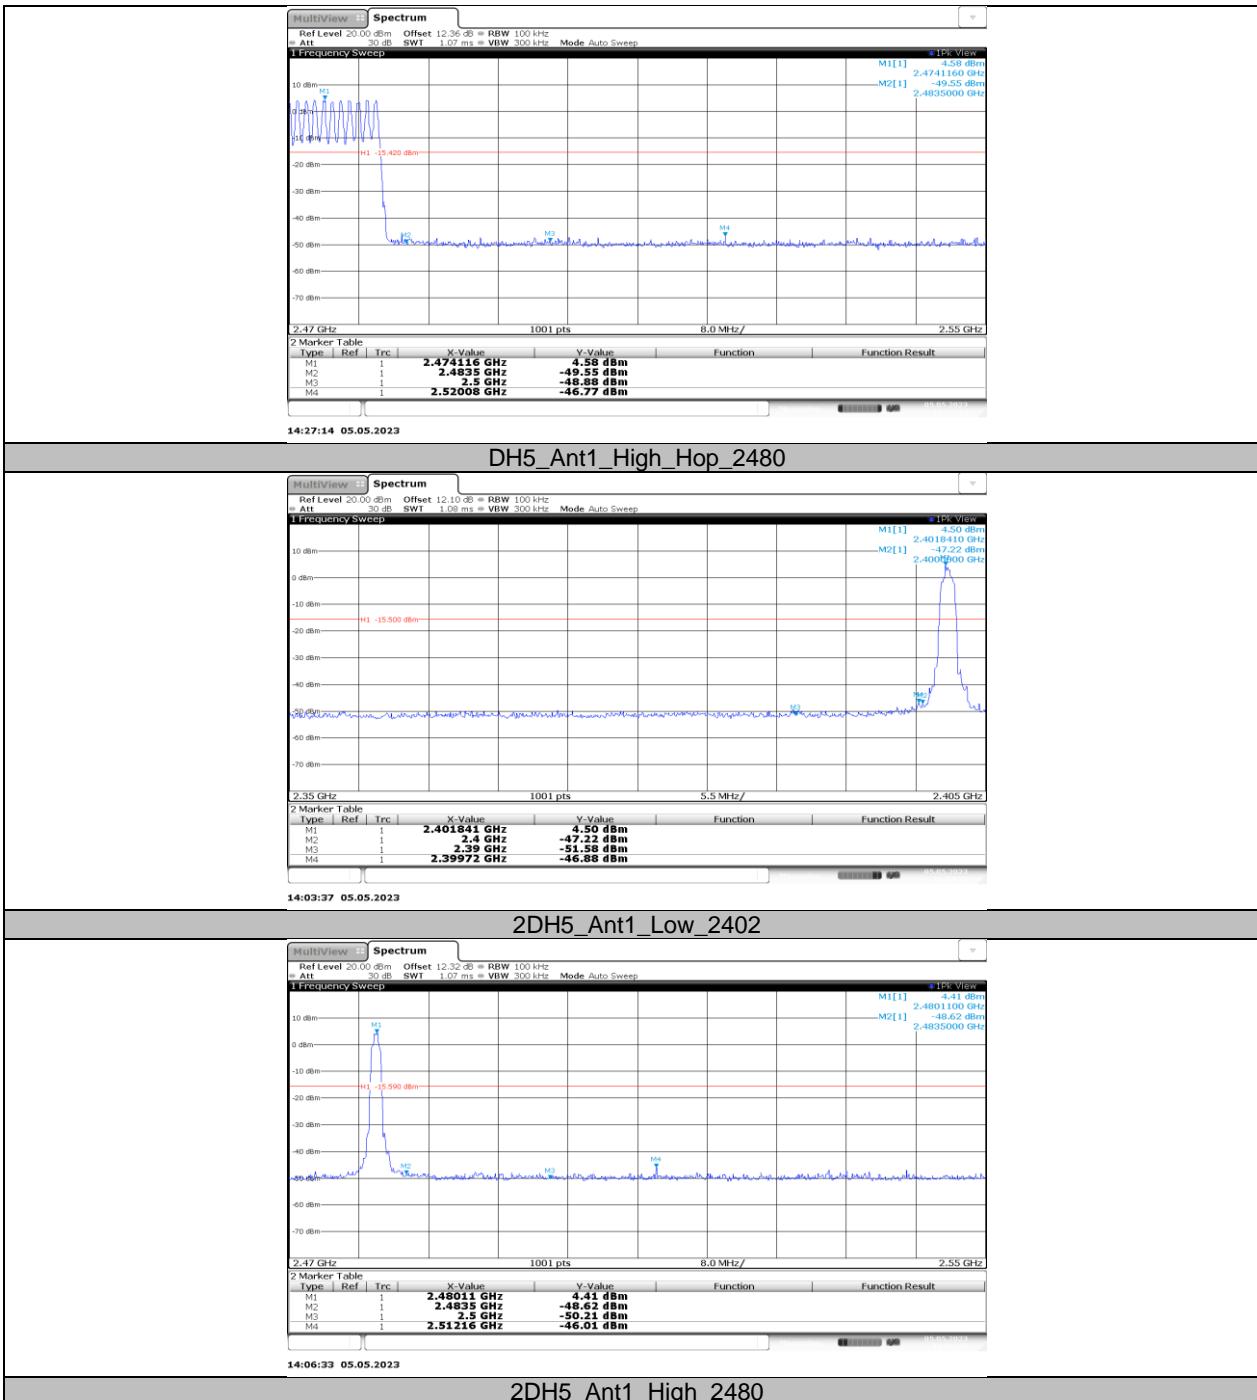

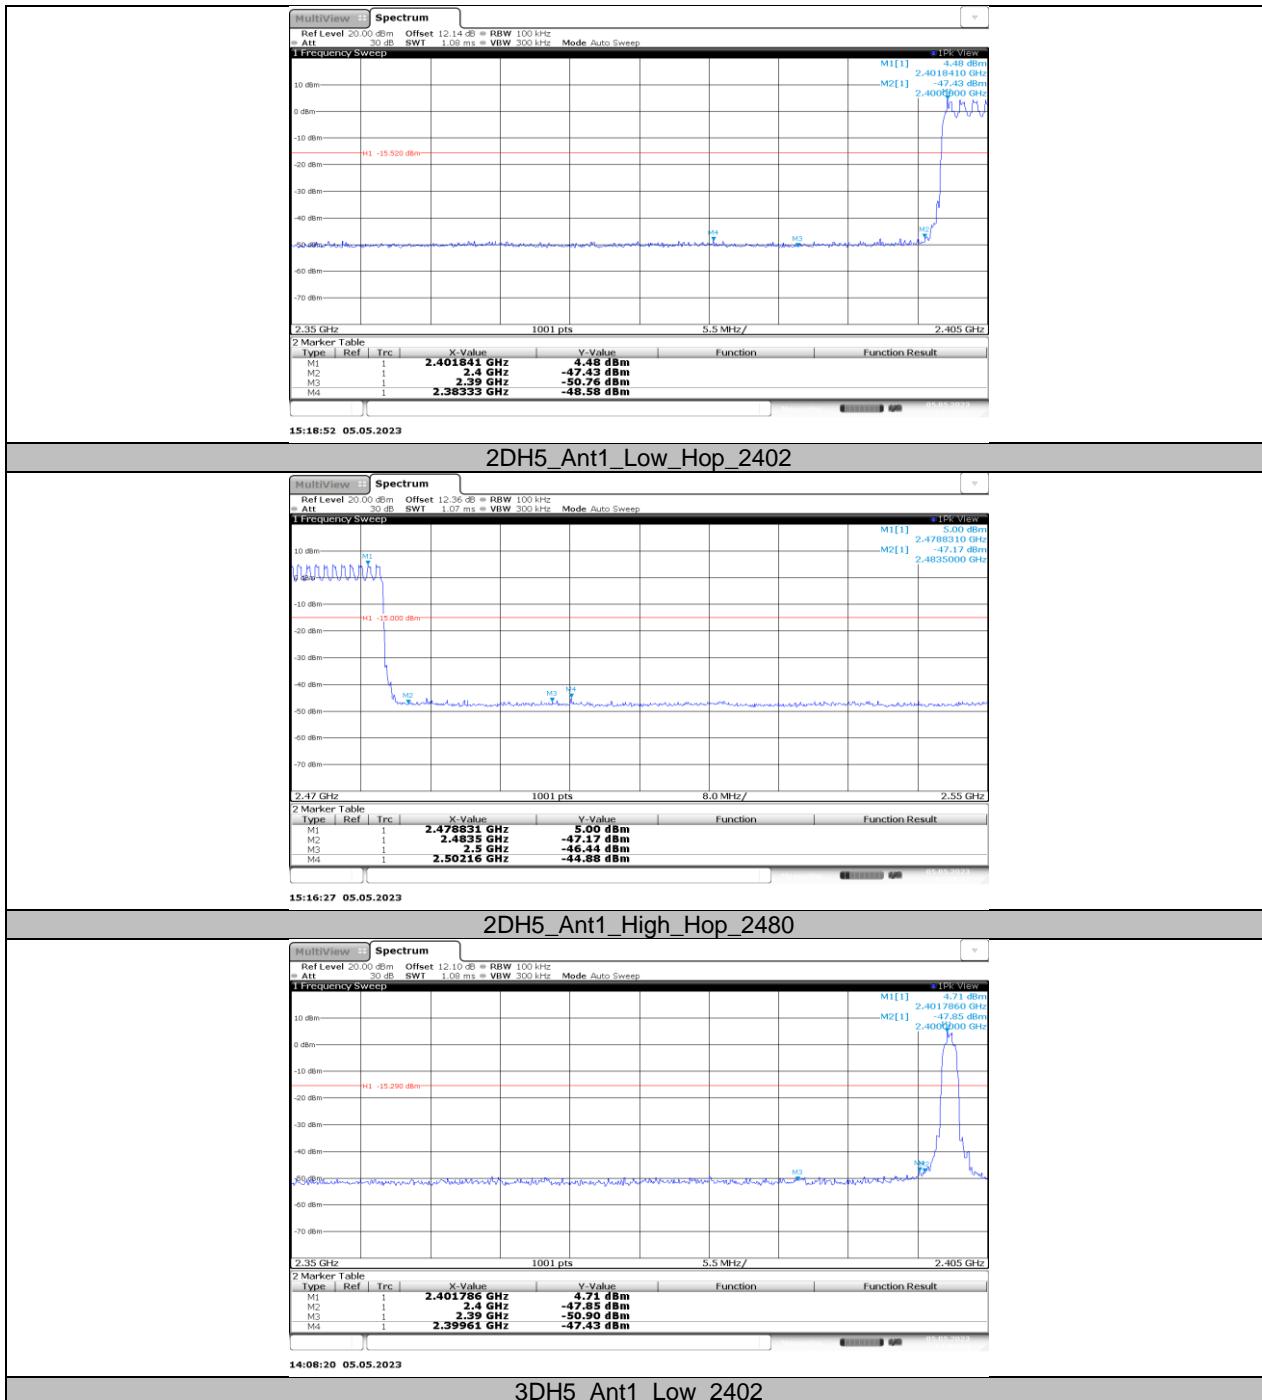

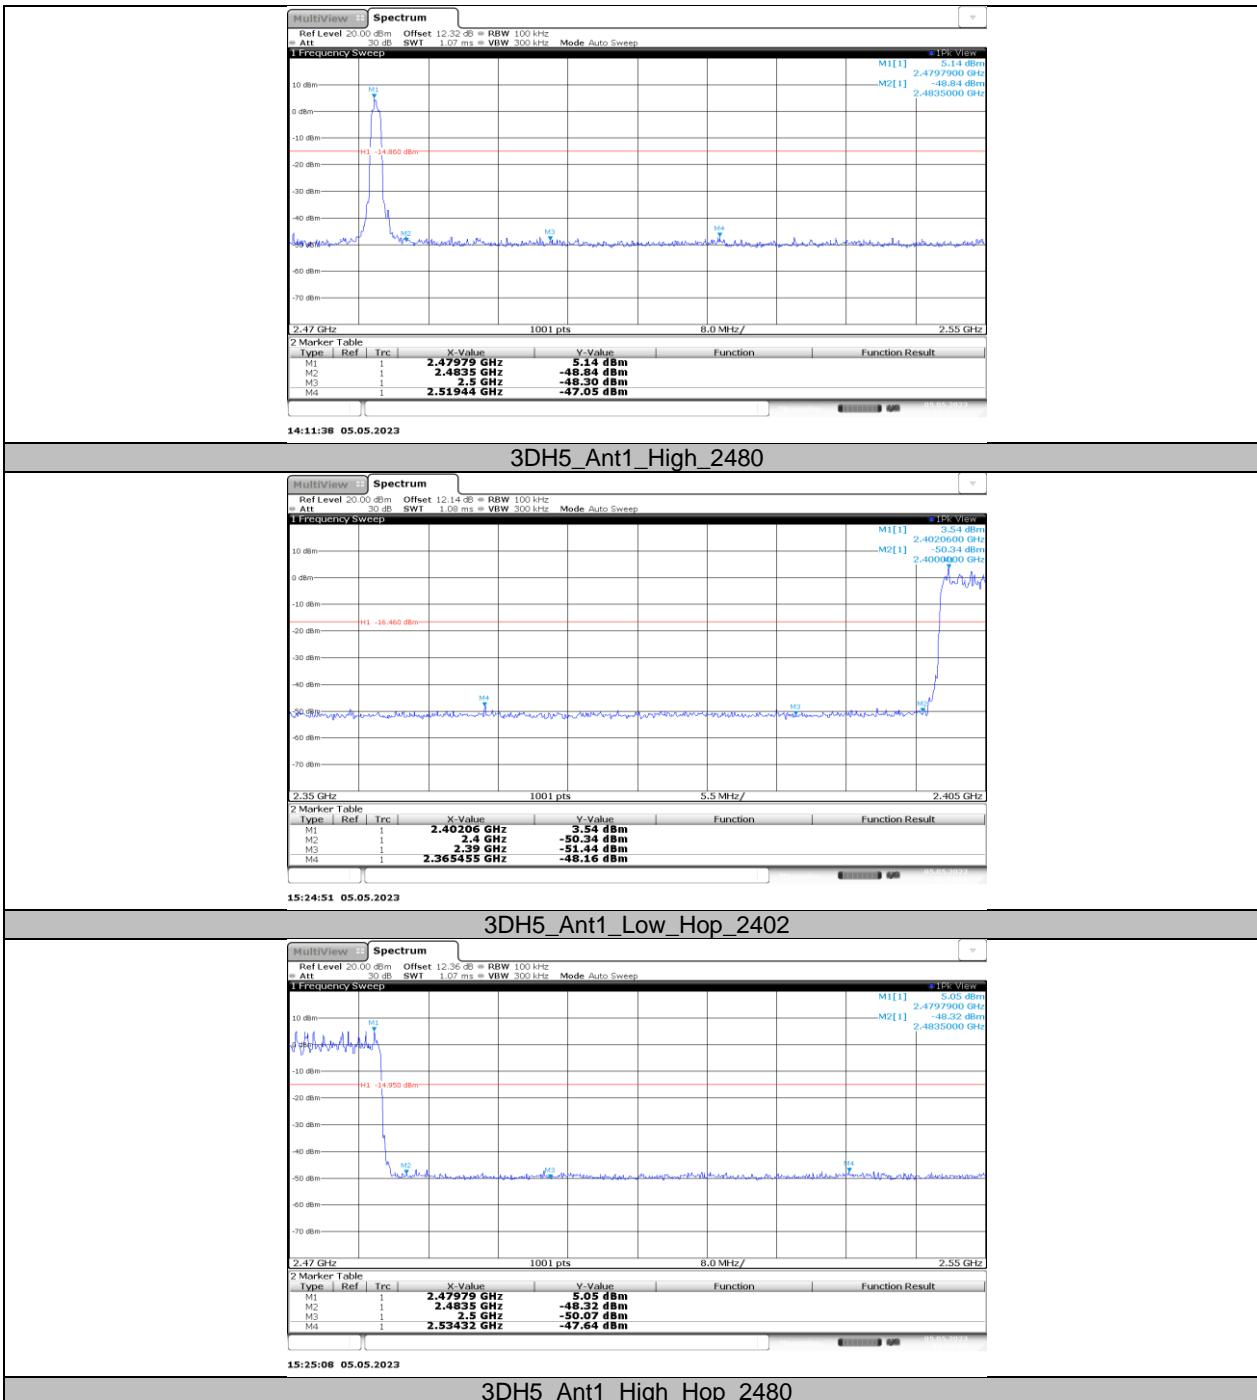



## 11.8. APPENDIX H: CONDUCTED SPURIOUS EMISSION


### 11.8.1. Test Result


Test Mode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	4.01	4.01	---	PASS
			30~1000	4.01	-59.39	≤-15.99	PASS
			1000~26500	4.01	-47.41	≤-15.99	PASS
		2441	Reference	3.95	3.95	---	PASS
			30~1000	3.95	-59.12	≤-16.05	PASS
			1000~26500	3.95	-46.93	≤-16.05	PASS
		2480	Reference	4.22	4.22	---	PASS
			30~1000	4.22	-59.09	≤-15.78	PASS
			1000~26500	4.22	-47.58	≤-15.78	PASS
2DH5	Ant1	2402	Reference	2.56	2.56	---	PASS
			30~1000	2.56	-59.19	≤-17.44	PASS
			1000~26500	2.56	-47.49	≤-17.44	PASS
		2441	Reference	3.58	3.58	---	PASS
			30~1000	3.58	-58.6	≤-16.42	PASS
			1000~26500	3.58	-47.18	≤-16.42	PASS
		2480	Reference	3.43	3.43	---	PASS
			30~1000	3.43	-59.1	≤-16.57	PASS
			1000~26500	3.43	-46.75	≤-16.57	PASS
3DH5	Ant1	2402	Reference	3.68	3.68	---	PASS
			30~1000	3.68	-58.37	≤-16.32	PASS
			1000~26500	3.68	-47.25	≤-16.32	PASS
		2441	Reference	3.03	3.03	---	PASS
			30~1000	3.03	-58.39	≤-16.97	PASS
			1000~26500	3.03	-47.74	≤-16.97	PASS
		2480	Reference	3.17	3.17	---	PASS
			30~1000	3.17	-59.31	≤-16.83	PASS
			1000~26500	3.17	-46.87	≤-16.83	PASS


## 11.8.2. Test Graphs

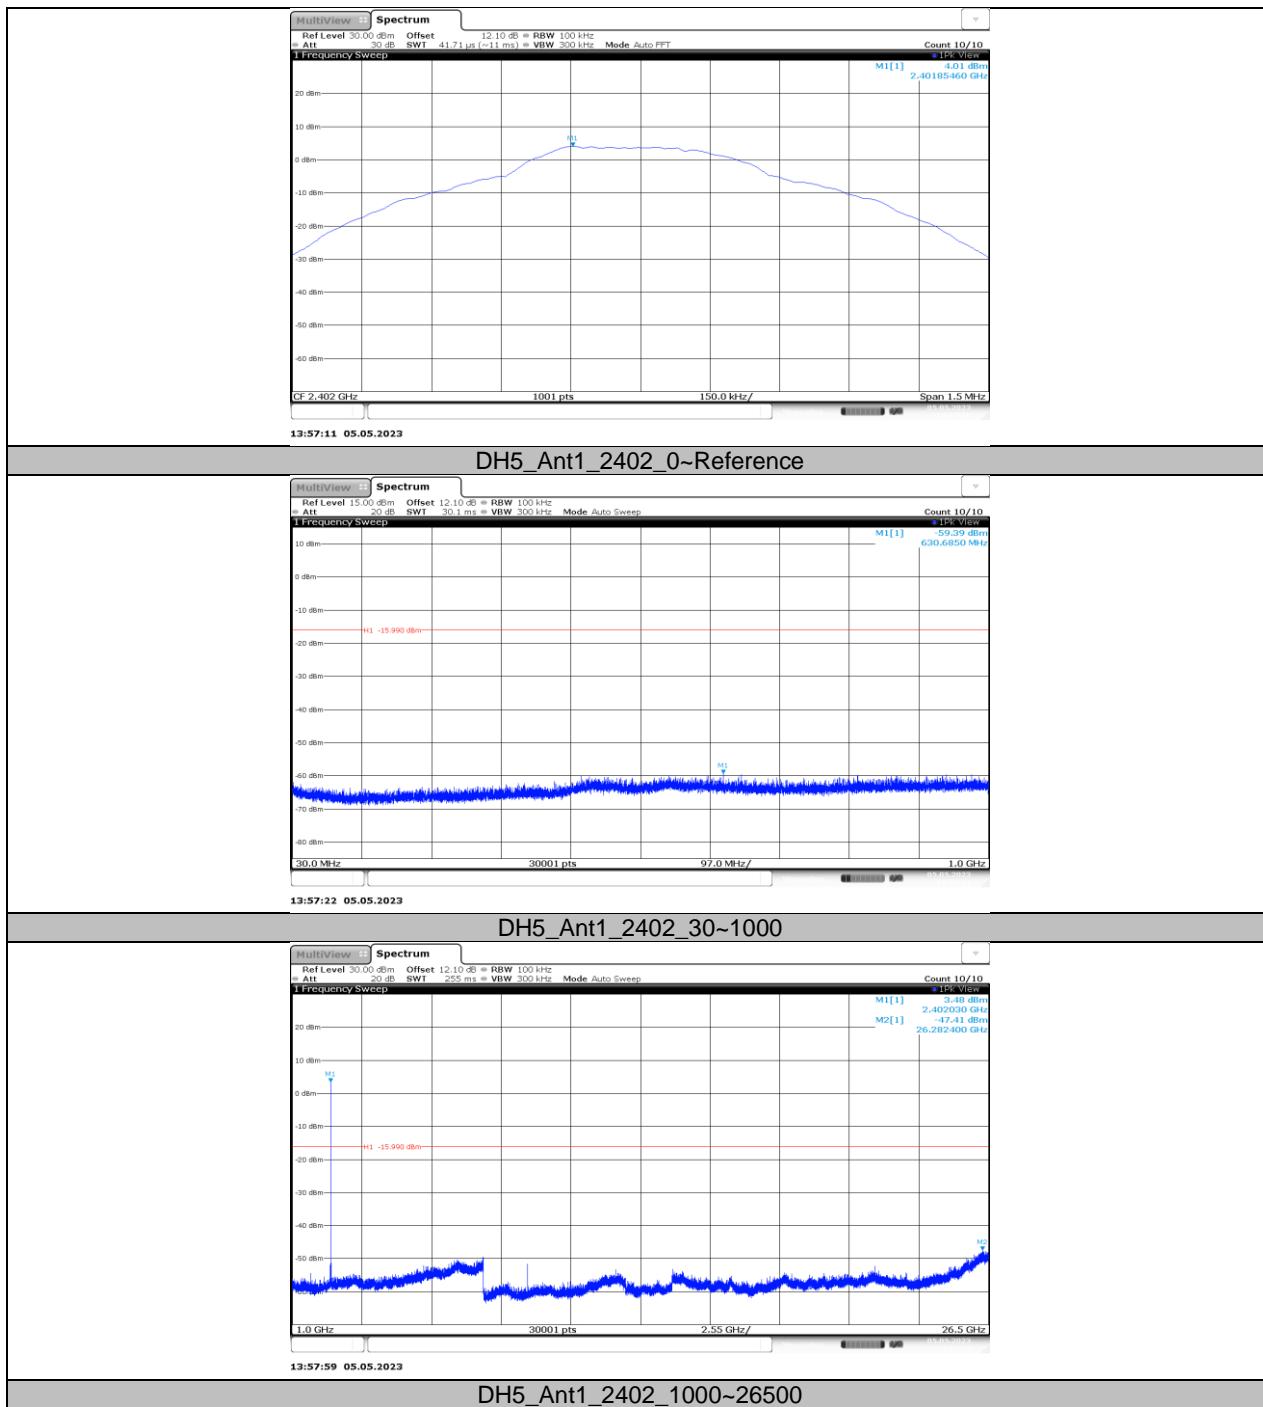


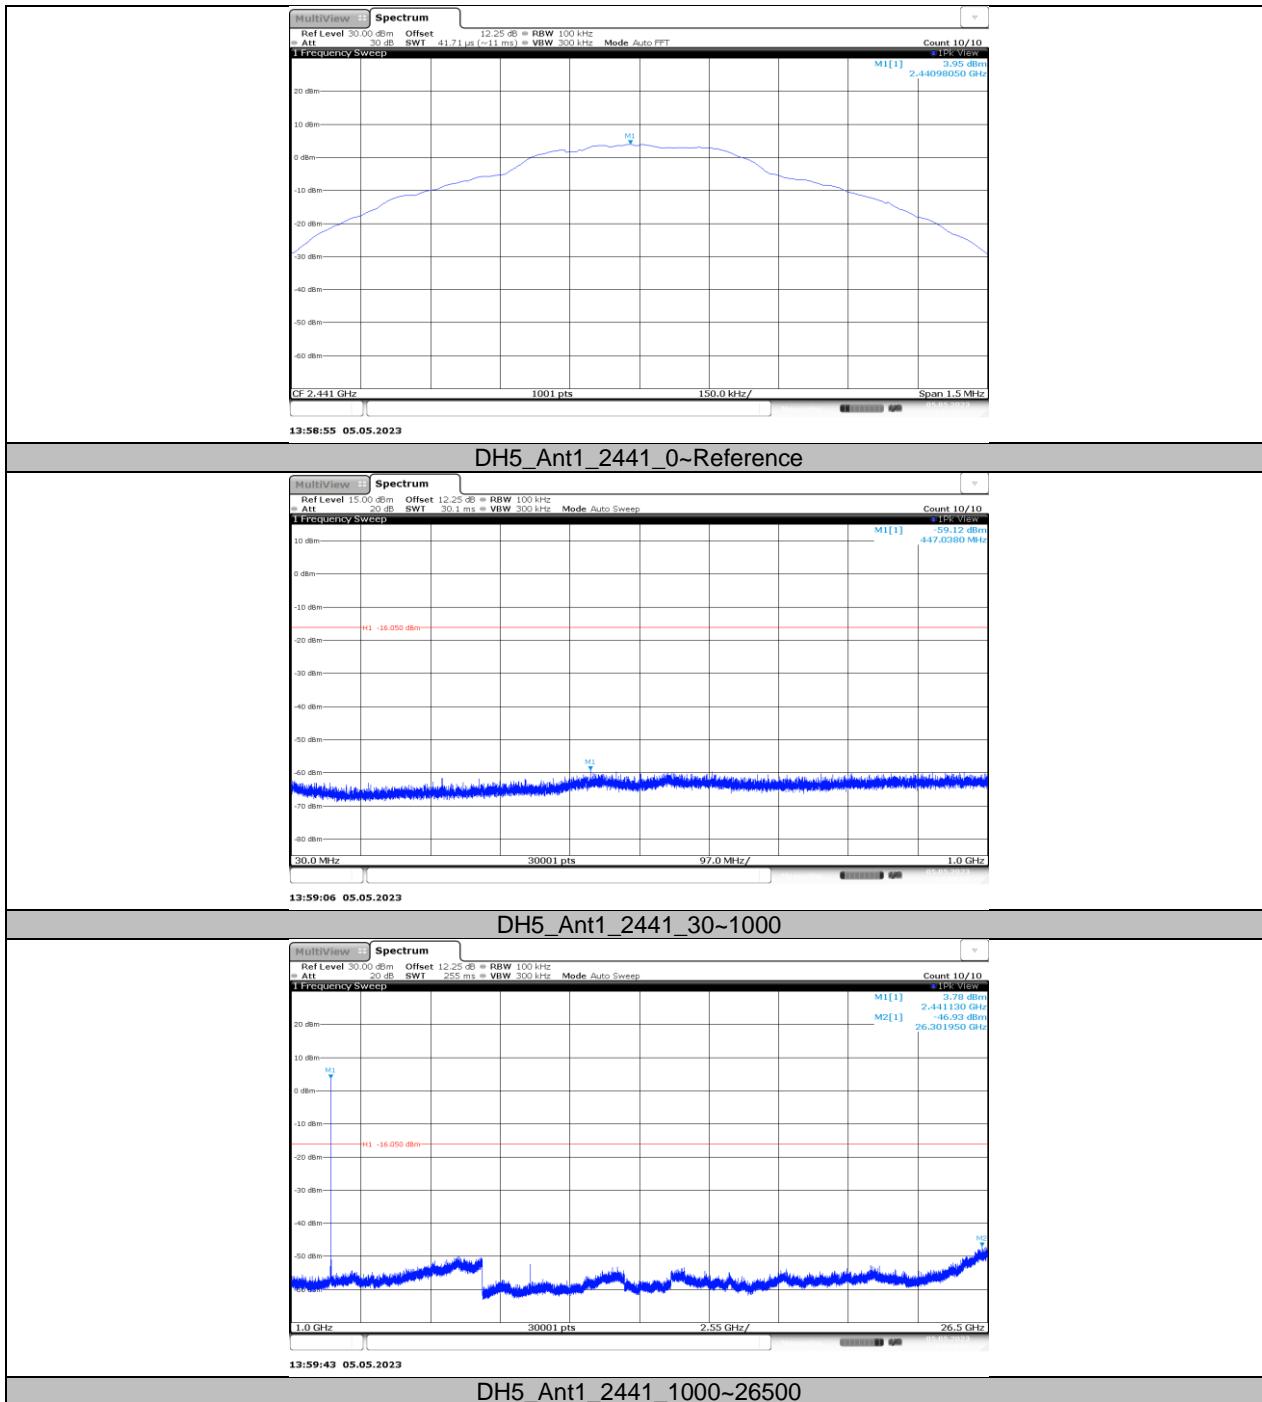


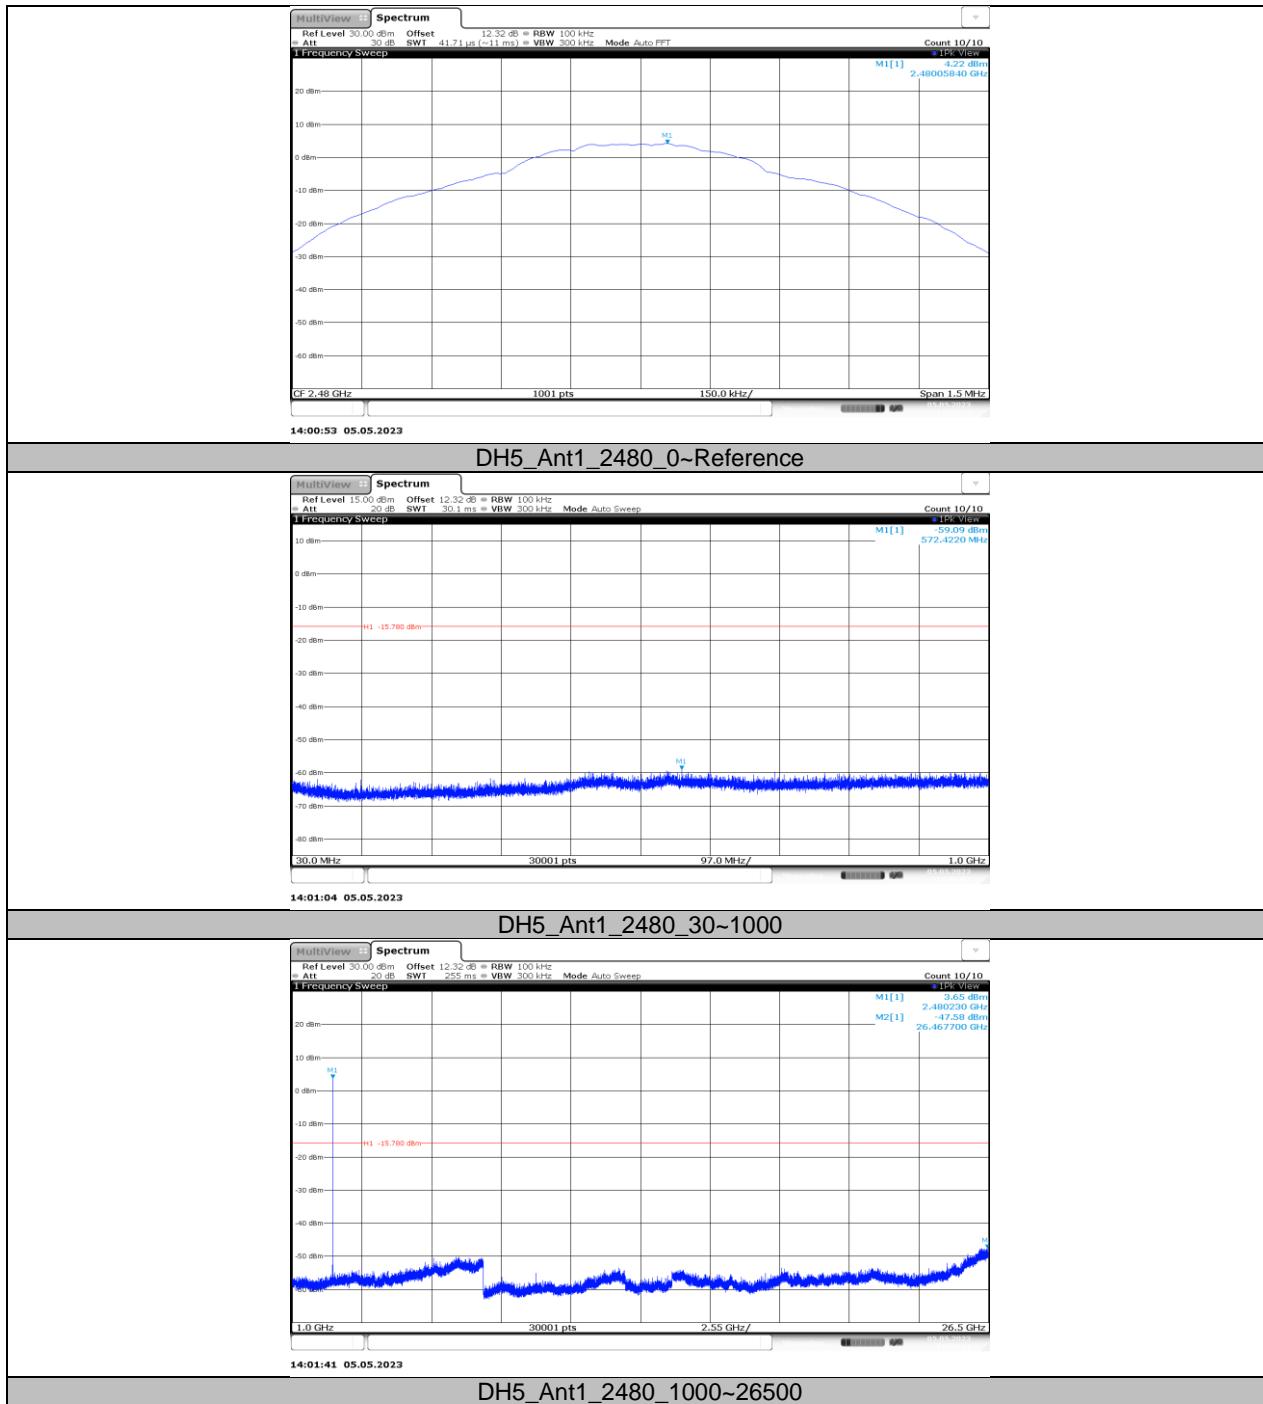


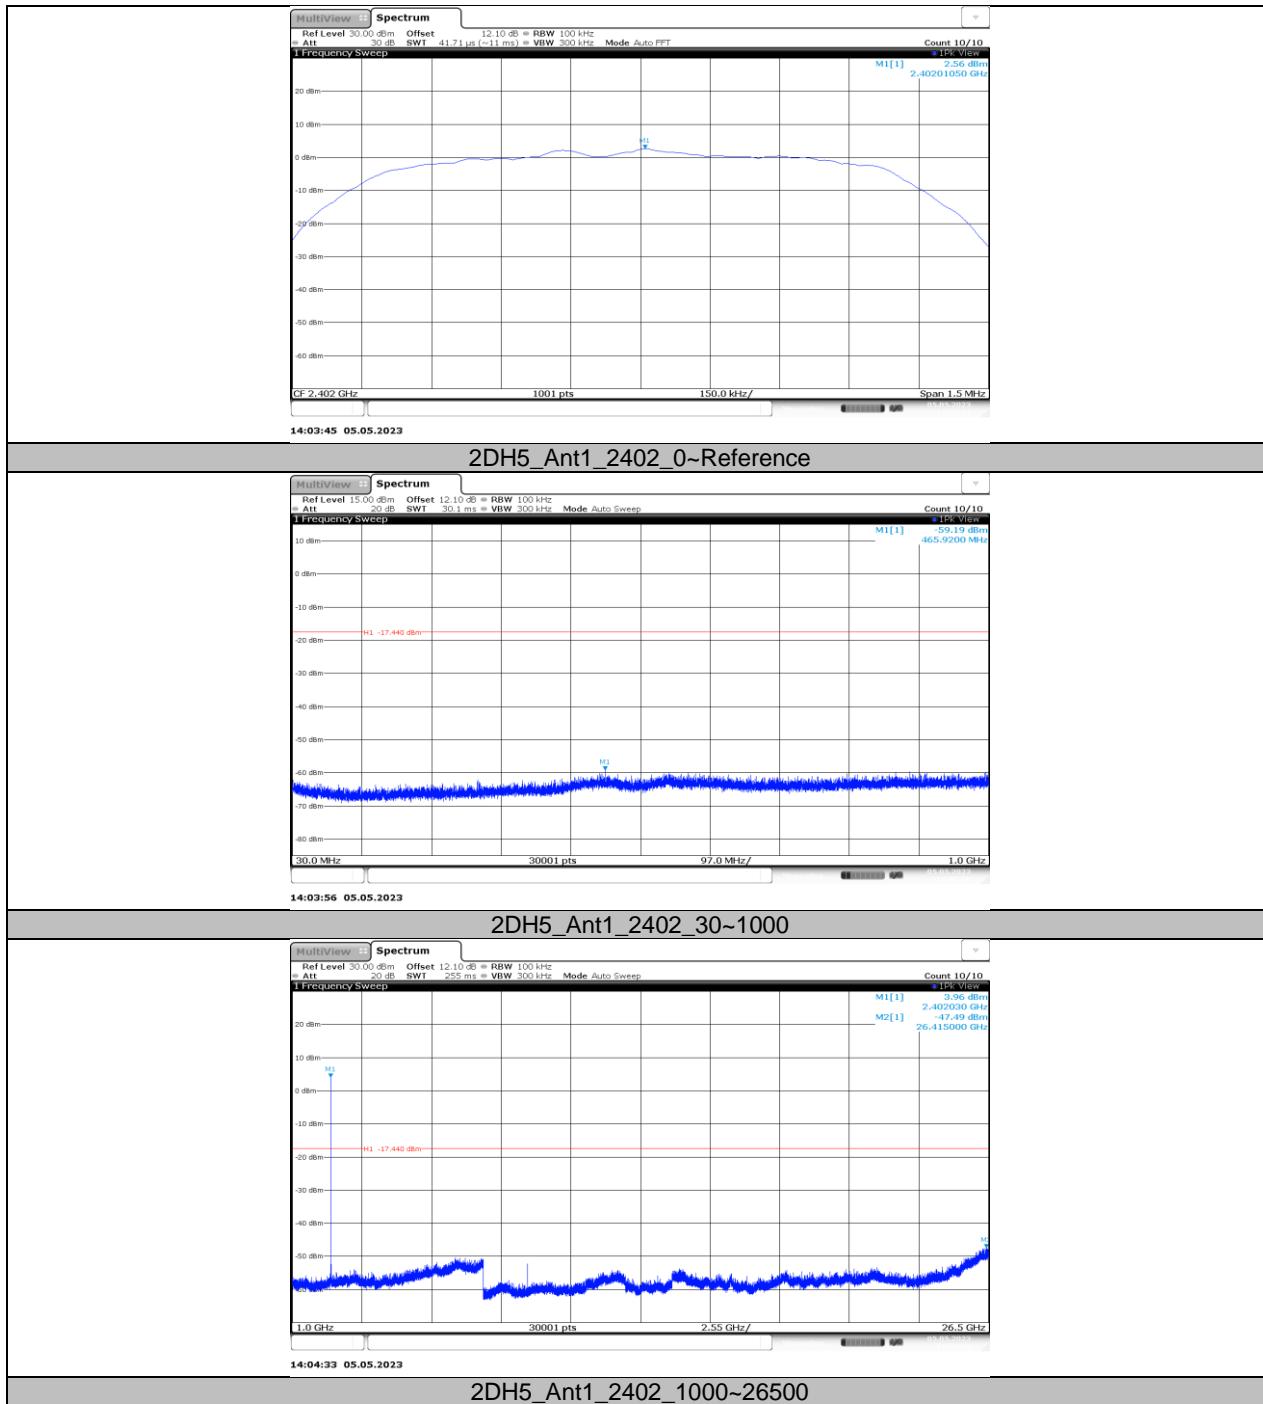


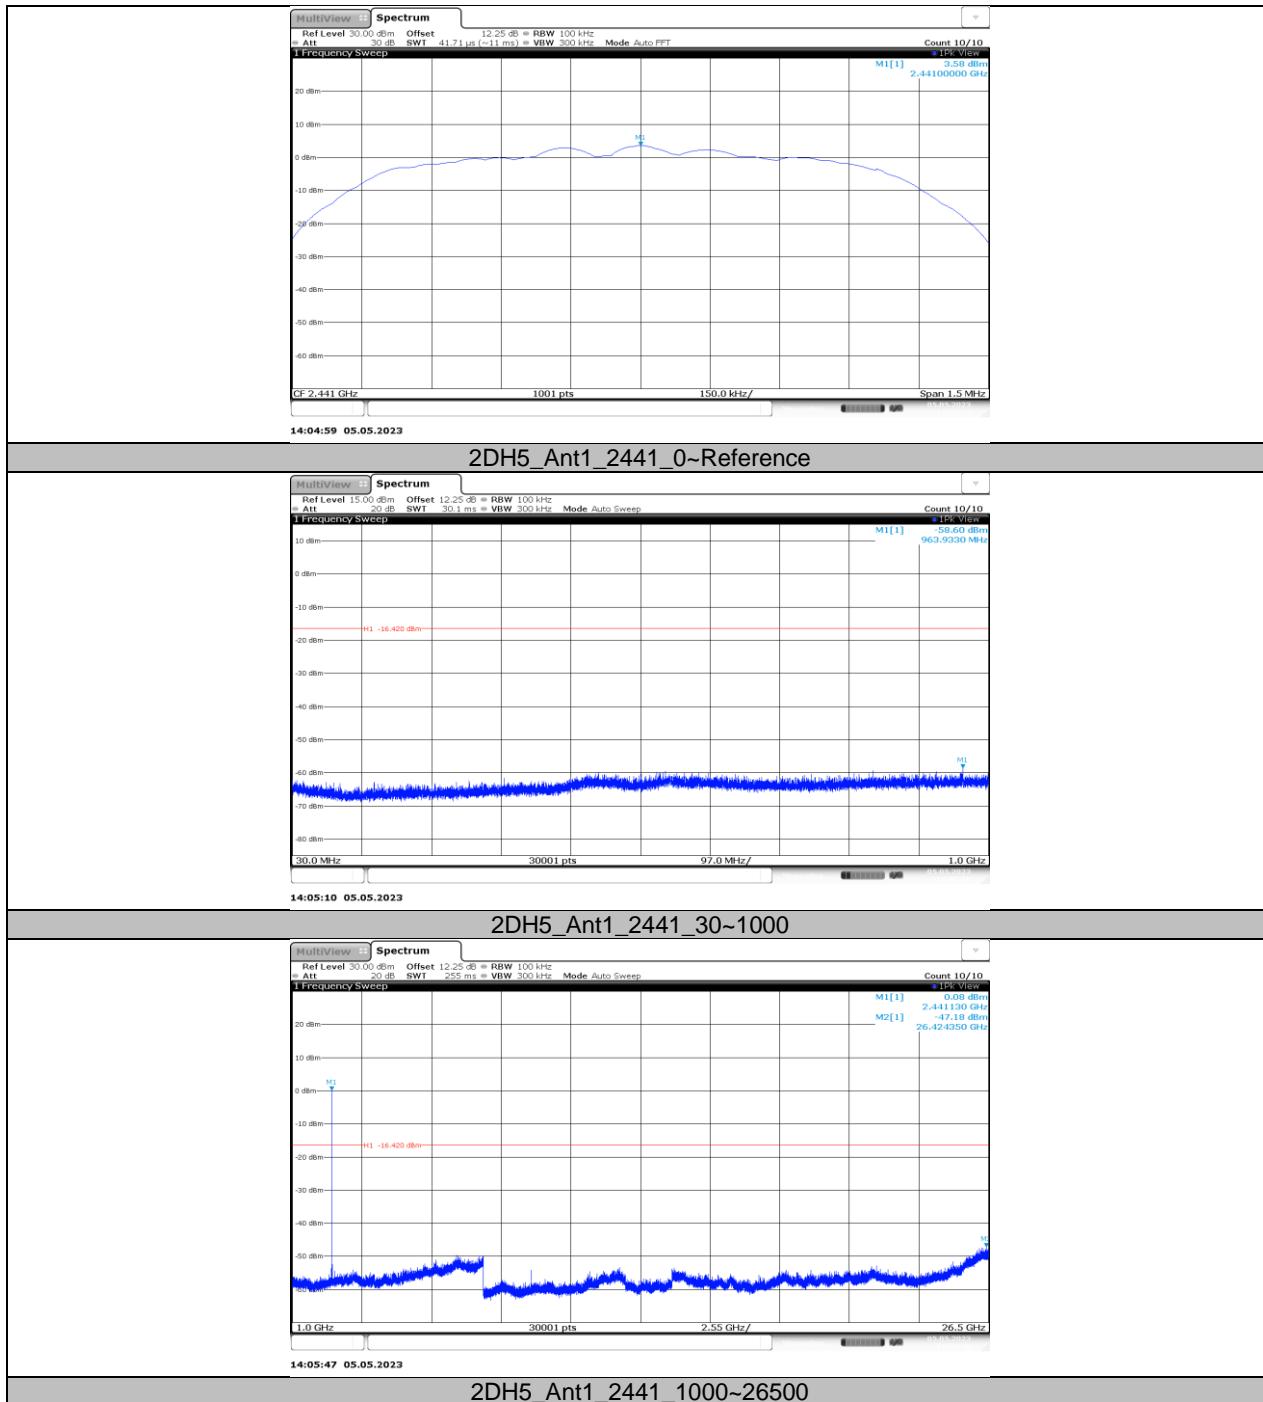

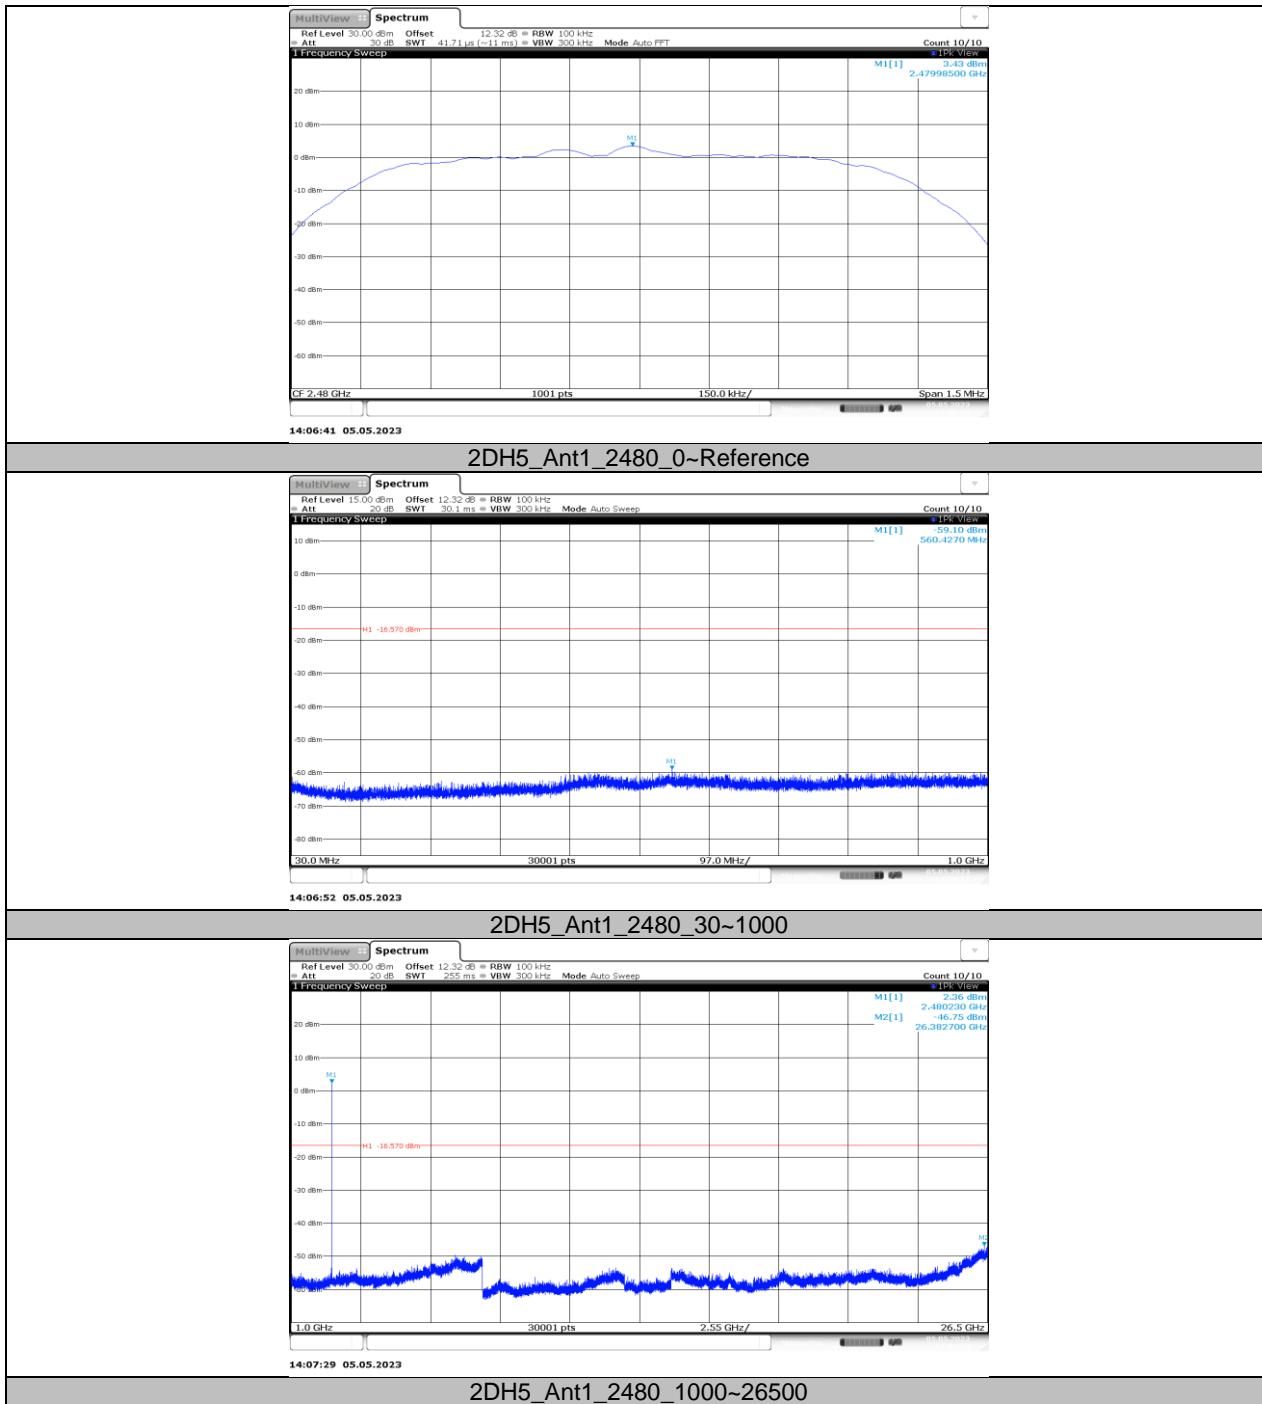

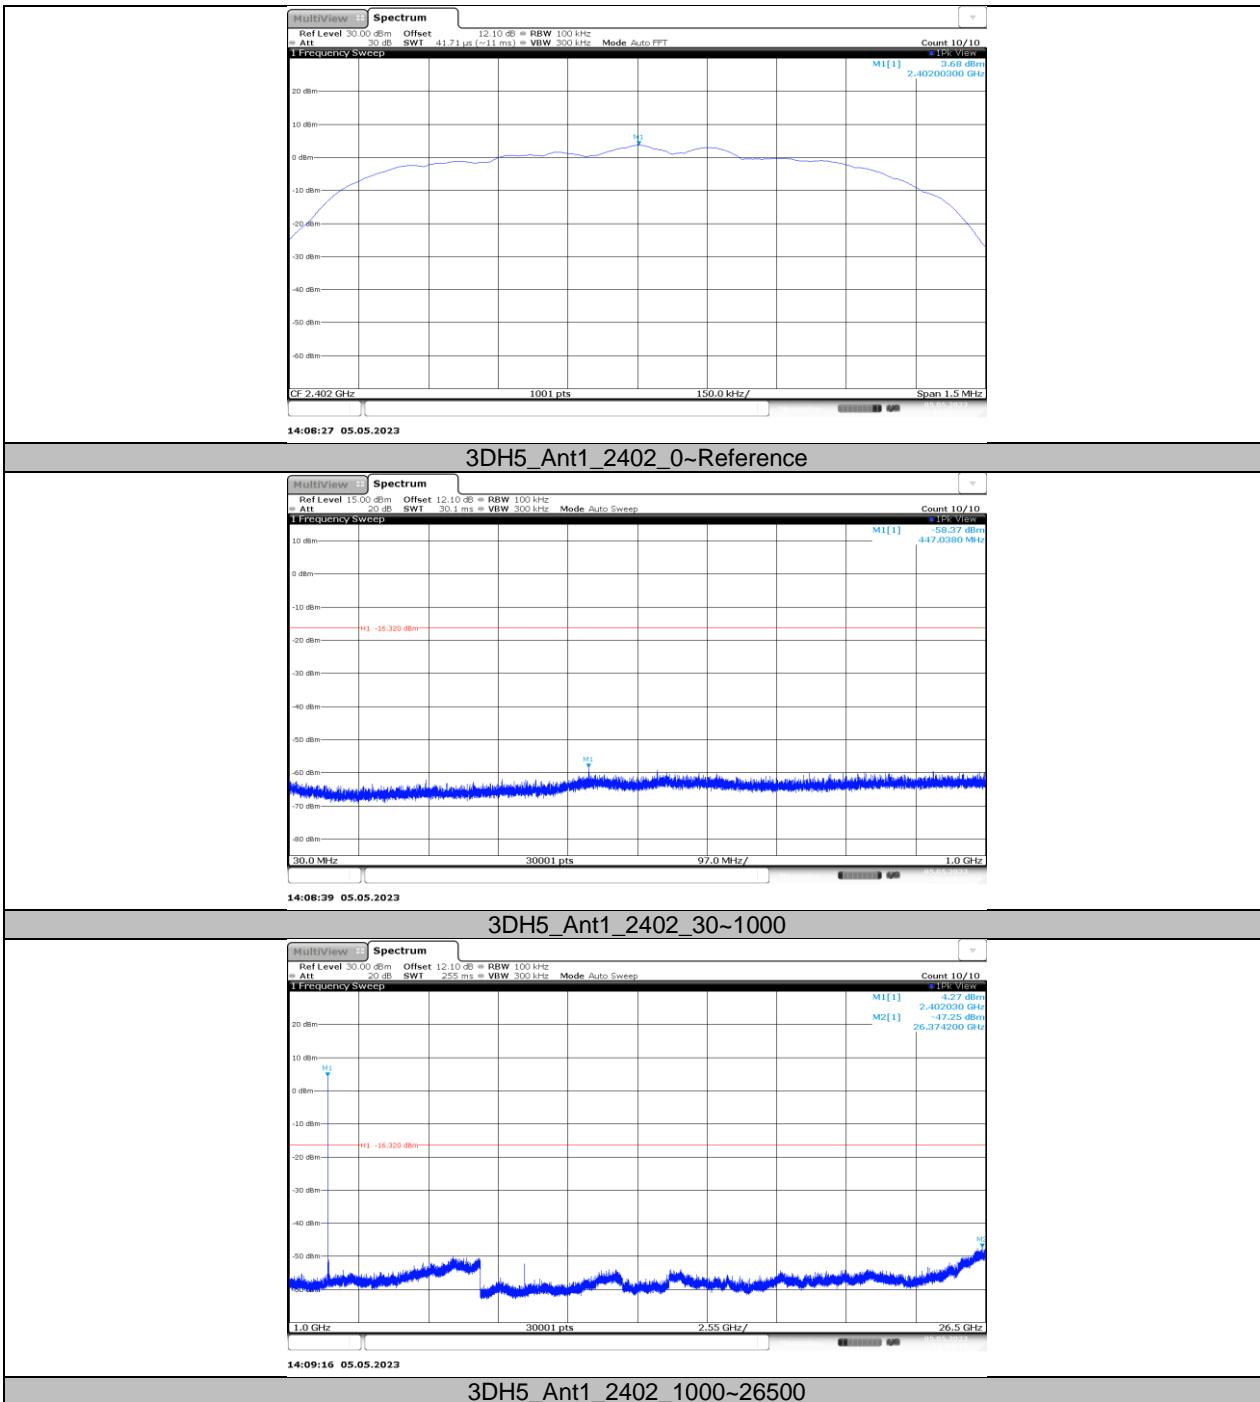

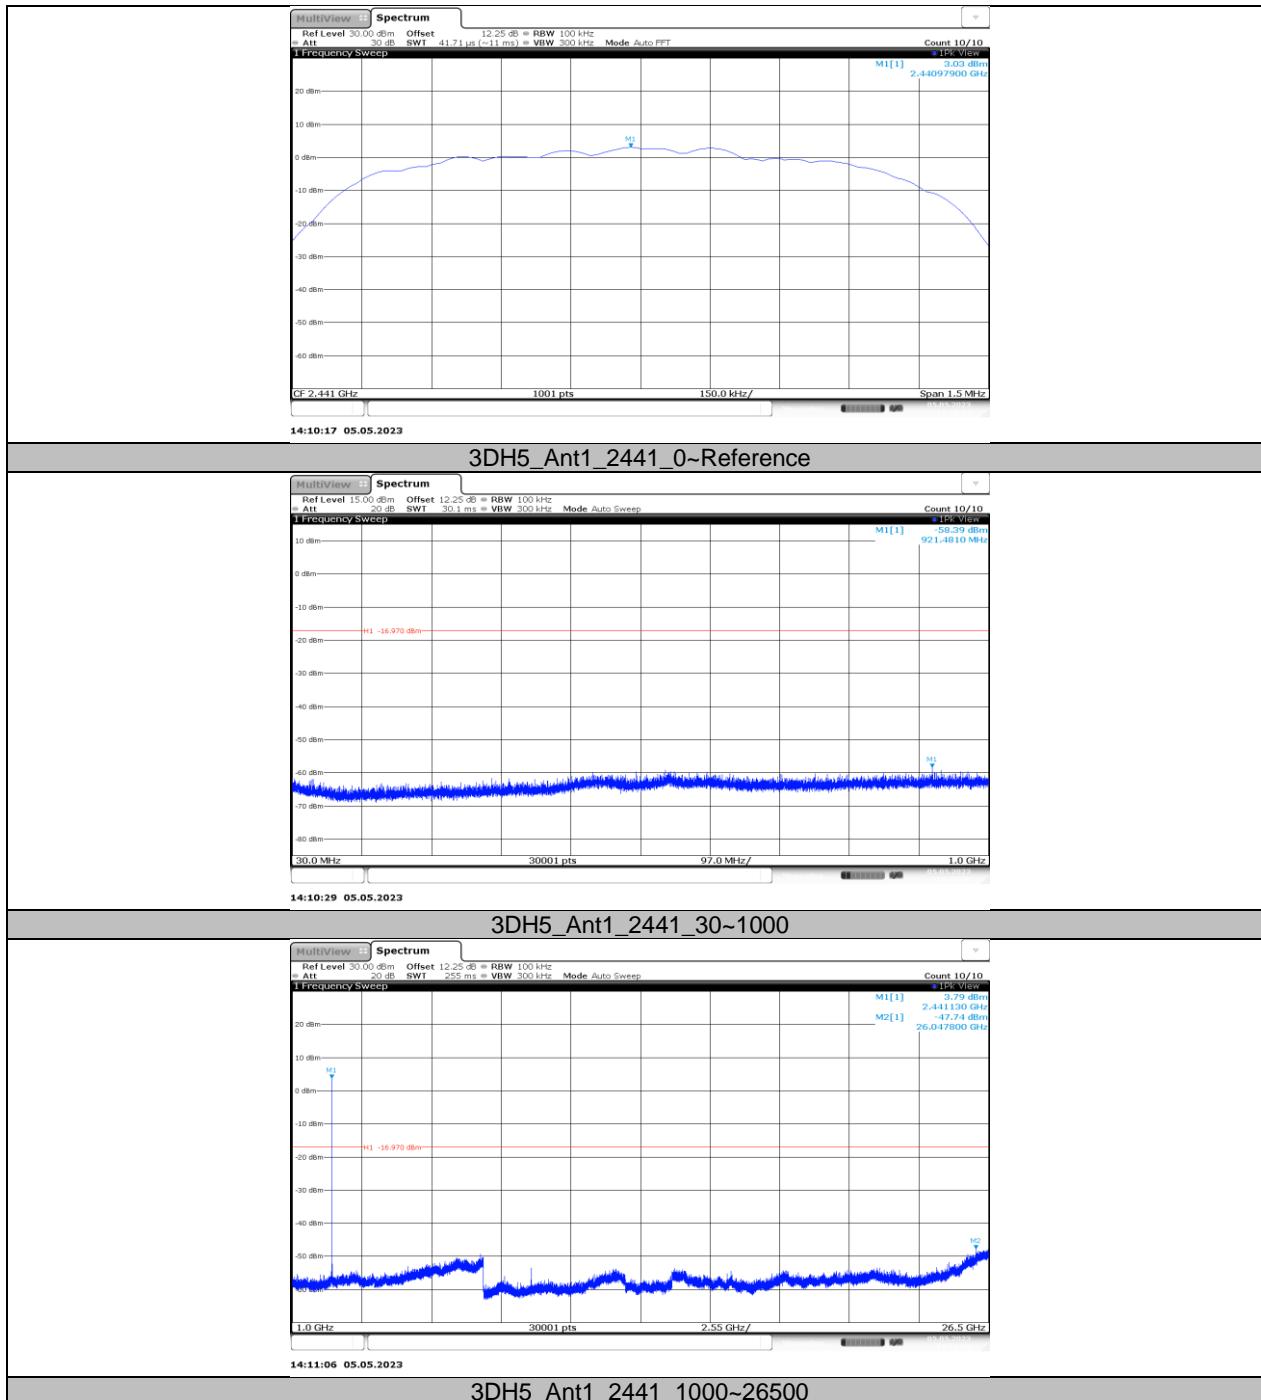

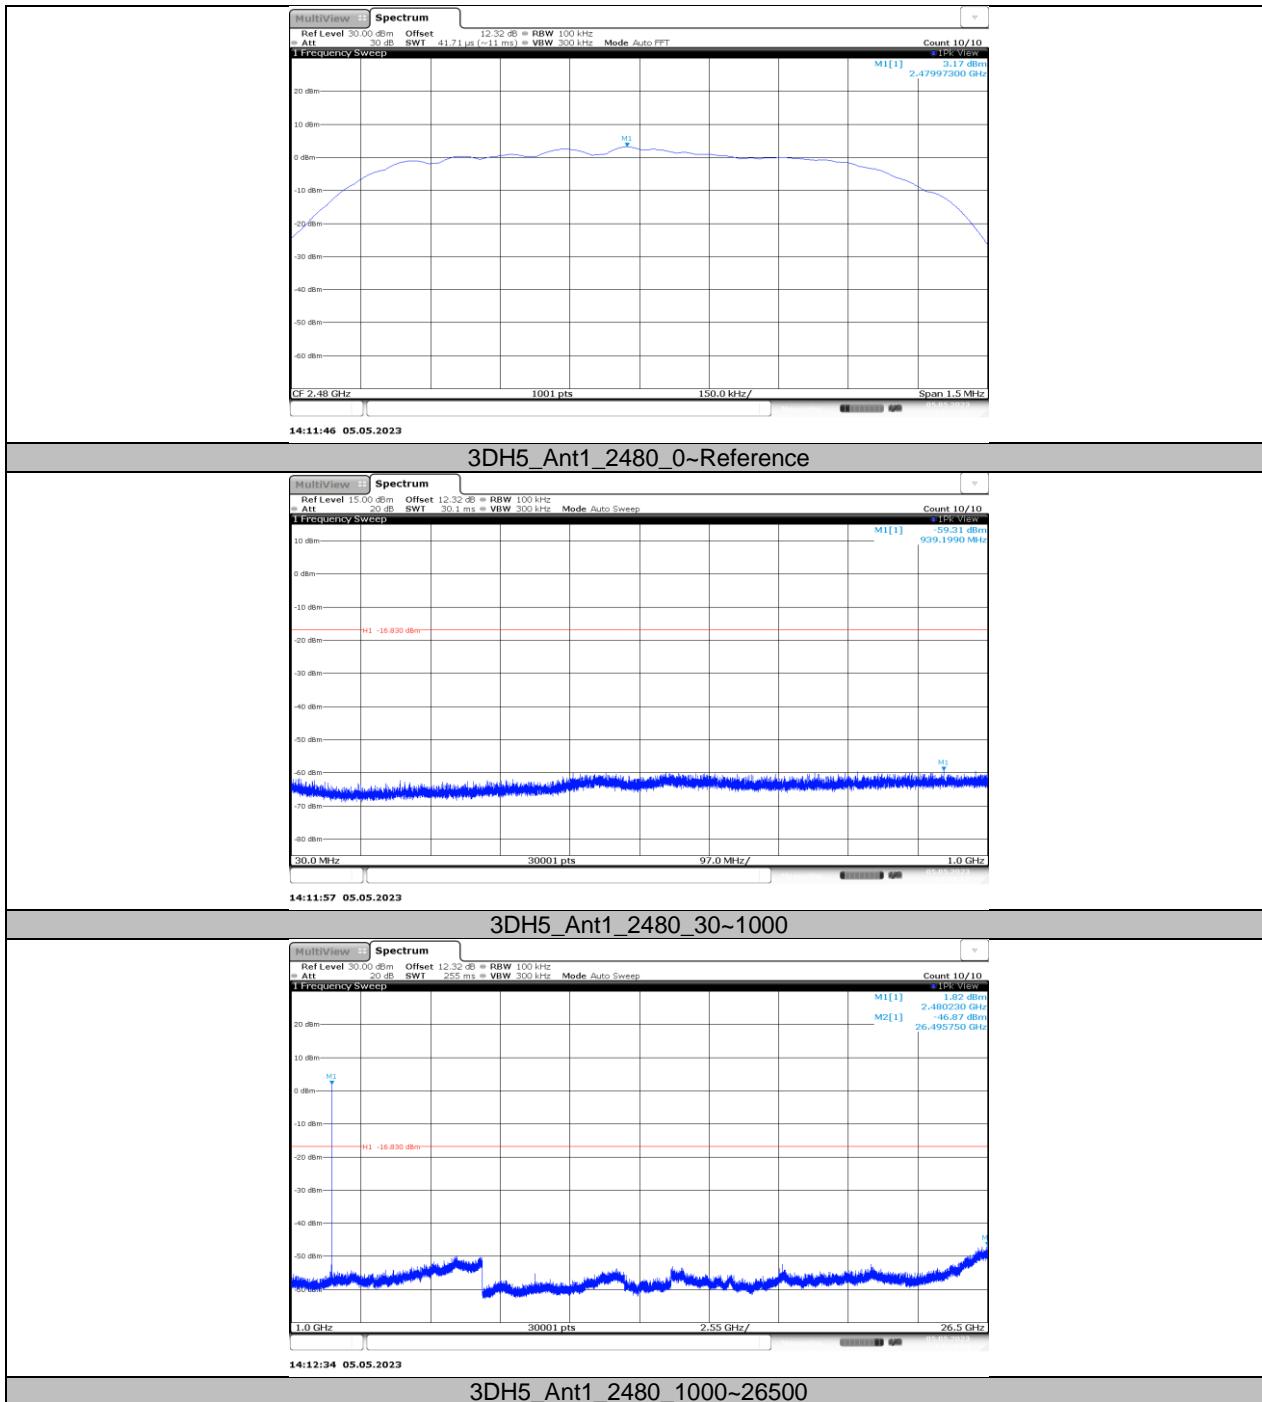

## 11.9. APPENDIX I: DUTY CYCLE

### 11.9.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
DH5	2.87	3.75	0.7653	76.53	1.16	0.35	0.5
2DH5	2.88	3.75	0.7680	76.80	1.15	0.35	0.5
3DH5	2.89	3.76	0.7686	76.86	1.14	0.35	0.5

Note:


Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

## 11.9.2. Test Graphs

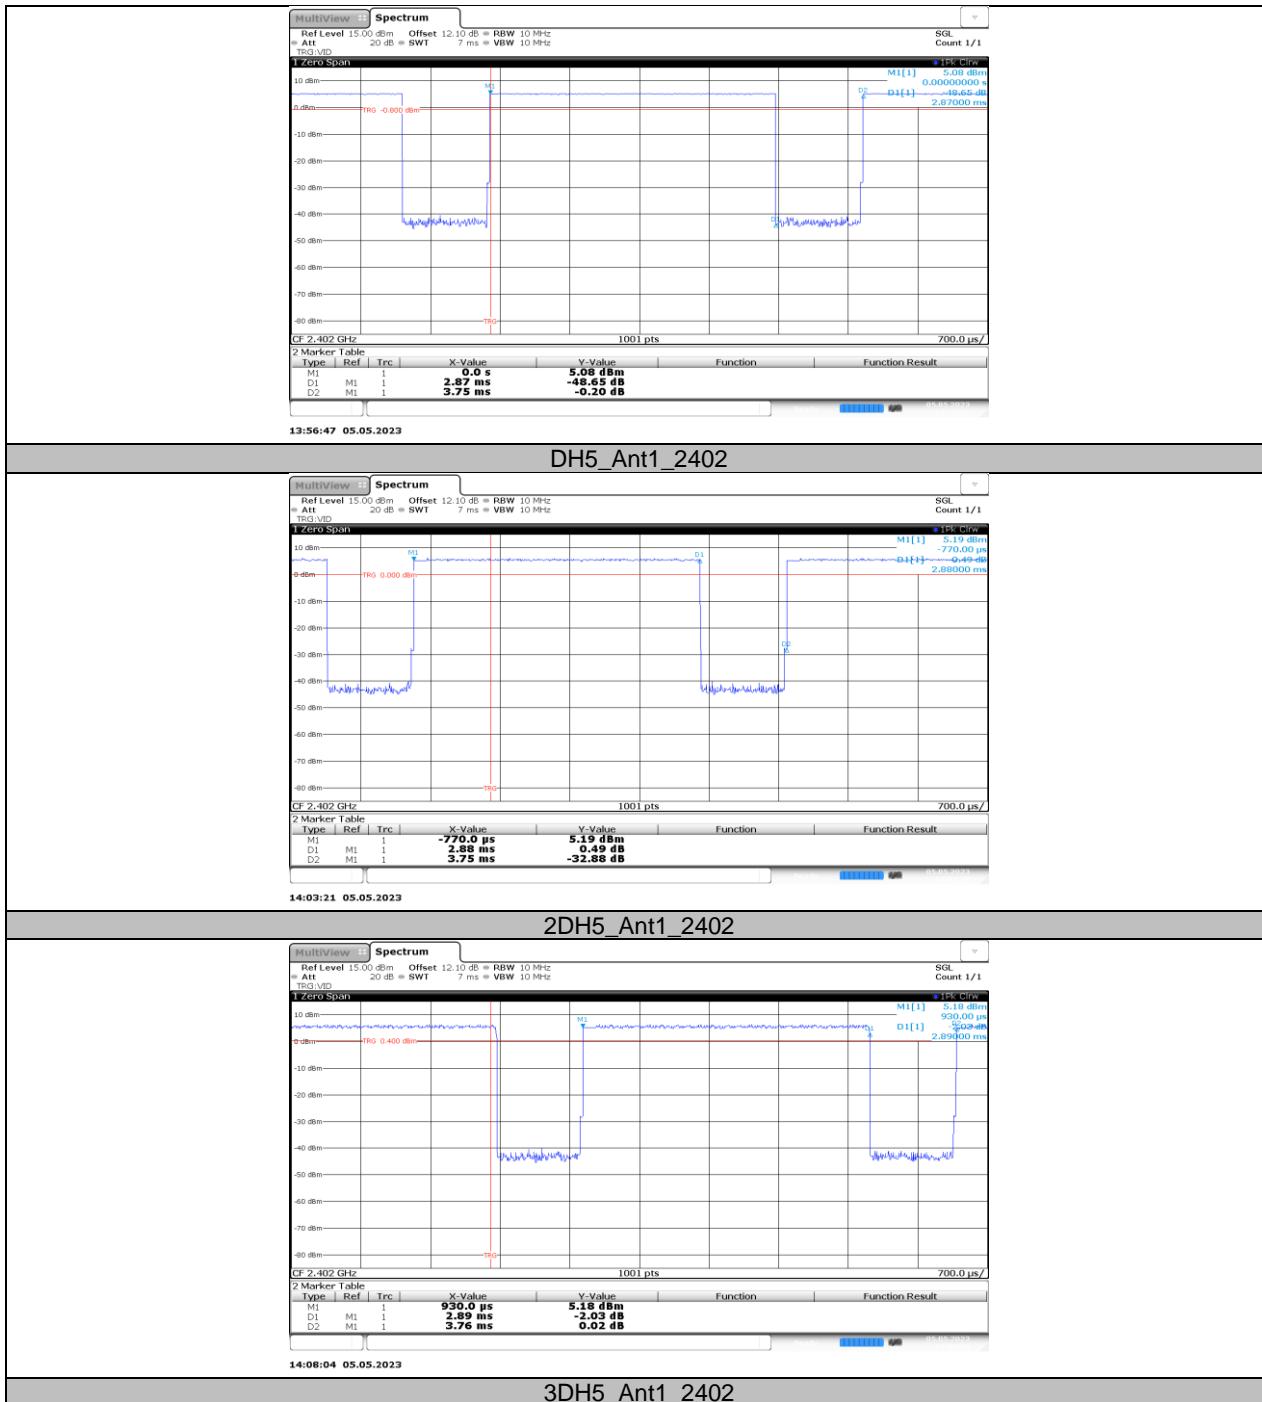

**END OF REPORT**