



NO.: RZA2008-1542



OET 65

TEST REPORT

Test name	Electromagnetic Field (Specific Absorption Rate)
Product	HSDPA USB Stick
Model	E156B
FCC ID	QISE156B
Client	HUAWEI Technologies Co., Ltd.

TA Technology (Shanghai) Co., Ltd.



GENERAL TERMS

1. The test report is invalid if not marked with “exclusive stamp for the data report” or the stamp of the TA.
2. Any copy of the test report is invalid if not re-marked with the “exclusive stamp for the test report” or the stamp of TA.
3. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
4. The test report is invalid if there is any evidence of erasure and/or falsification.
5. If there is any dissidence for the test report, please file objection to the test center with in 15 days from the date of receiving the test report.
6. Normally, entrust test is only responsible for the samples that have undergone the test.
7. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permissions of TA.

Address: Room4, No.399, Cailun Rd, Zhangjiang Hi-Tech Park, Pudong Shanghai, China

Post code: 201203

Telephone: +86-021-50791141/2/3

Fax: +86-021-50791141/2/3-8000

Website: <http://www.ta-shanghai.com>

E-mail: service@ta-shanghai.com

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-1542

Page 3of 166

GENERAL SUMMARY


Product	HSDPA USB Stick	Model	E156B
Client	HUAWEI Technologies Co., Ltd.	Type of test	Entrusted
Manufacturer	HUAWEI Technologies Co., Ltd.	Arrival Date of sample	December 2 nd , 2008
Place of sampling	(Blank)	Carrier of the samples	Ting Zhang
Quantity of the samples	One	Date of product	(Blank)
Base of the samples	(Blank)	Items of test	SAR
Series number	GK2AA108C0500067		
Standard(s)	<p>ANSI C95.1–2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p>OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.</p> <p>IEC 62209-2(draft)-2008: Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR)for wireless communication devices used in close proximity to the human body .(frequency rang of 30MHz to 6GHz)</p>		
Conclusion	<p>Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 7.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 7.1 of this test report.</p> <p>General Judgment: Pass</p> <p style="text-align: right;">(Stamp) Date of issue: December 26th, 2008</p>		
Comment	The test result only responds to the measured sample.		

Approved by



Weizhong Yang

Revised by



Minbao Ling

Performed by



Jinchang Li

TABLE OF CONTENT

1.	COMPETENCE AND WARRANTIES.....	6
2.	GENERAL CONDITIONS.....	6
3.	DESCRIPTION OF EUT	7
3.1.	ADDRESSING INFORMATION RELATED TO EUT	7
3.2.	CONSTITUENTS OF EUT	7
3.3.	TEST ITEM.....	8
3.4.	GENERAL DESCRIPTION	9
4.	OPERATIONAL CONDITIONS DURING TEST	10
4.1.	GENERAL DESCRIPTION OF TEST PROCEDURES	10
4.2.	GSM TEST CONFIGURATION	10
4.3.	WCDMA TEST CONFIGURATION	11
4.4.	HSDPA TEST CONFIGURATION	11
4.5.	POSITION OF MODULE IN PORTABLE DEVICES.....	14
4.6.	PICTURE OF HOST PRODUCT	15
5.	SAR MEASUREMENTS SYSTEM CONFIGURATION	17
5.1.	SAR MEASUREMENT SET-UP	17
5.2.	DASY4 E-FIELD PROBE SYSTEM	18
5.2.1.	EX3DV4 Probe Specification.....	18
5.2.2.	E-field Probe Calibration.....	19
5.3.	OTHER TEST EQUIPMENT.....	19
5.3.1.	Device Holder for Transmitters.....	19
5.3.2.	Phantom.....	20
5.4.	SCANNING PROCEDURE.....	20
5.5.	DATA STORAGE AND EVALUATION	22
5.5.1.	Data Storage	22
5.5.2.	Data Evaluation by SEMCAD.....	22
5.6.	SYSTEM VALIDATION.....	25
5.7.	EQUIVALENT TISSUES	26
6.	LABORATORY ENVIRONMENT	26
7.	CHARACTERISTICS OF THE TEST	27
7.1.	APPLICABLE LIMIT REGULATIONS	27
7.2.	APPLICABLE MEASUREMENT STANDARDS	27
8.	CONDUCTED OUTPUT POWER MEASUREMENT	28
8.1.	SUMMARY.....	28
8.2.	CONDUCTED POWER RESULTS	28
9.	TEST RESULTS.....	31
9.1.	DIELECTRIC PERFORMANCE	31
9.2.	SYSTEM VALIDATION	31
9.3.	SUMMARY OF MEASUREMENT RESULTS	32
9.3.1.	GSM850 (GPRS/EGPRS)	32
9.3.2.	GSM1900 (GPRS/EGPRS)	34
9.3.3.	WCDMA Band II (HSDPA)	36
9.3.4.	WCDMA Band V (HSDPA)	37

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-1542

Page 5 of 166

9.4.	CONCLUSION	38
10.	MEASUREMENT UNCERTAINTY.....	39
11.	MAIN TEST INSTRUMENTS.....	40
12.	TEST PERIOD.....	40
13.	TEST LOCATION	40
ANNEX A:	TEST LAYOUT	41
ANNEX B:	GRAPH RESULTS	43
ANNEX C:	SYSTEM VALIDATION RESULTS	127
ANNEX D:	PROBE CALIBRATION CERTIFICATE.....	131
ANNEX E:	D835V2 DIPOLE CALIBRATION CERTIFICATE	140
ANNEX F:	D1900V2 DIPOLE CALIBRATION CERTIFICATE.....	149
ANNEX G:	DAE3 CALIBRATION CERTIFICATE.....	158
ANNEX H:	THE EUT APPEARANCES AND TEST CONFIGURATION	163

1. COMPETENCE AND WARRANTIES

TA Technology (Shanghai) Co., Ltd. is a test laboratory competent to carry out the tests described in this test report.

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test.

2. GENERAL CONDITIONS

This report only refers to the item that has undergone the test.

This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This document is only valid if complete; no partial reproduction can be made without written approval of **TA Technology (Shanghai) Co., Ltd.**

This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-1542

Page 7 of 166

3. DESCRIPTION OF EUT

3.1. Addressing Information Related to EUT

Table 1: Applicant (The Client)

Name or Company	HUAWEI Technologies Co., Ltd.
Address/Post	Bantian, Longgang District
City	Shenzhen
Postal Code	518129
Country	P.R. China
Telephone	0755-28780808
Fax	0755-28780808

Table 2: Manufacturer

Name or Company	HUAWEI Technologies Co., Ltd.
Address/Post	Bantian, Longgang District
City	Shenzhen
Postal Code	518129
Country	P.R. China
Telephone	0755-28780808
Fax	0755-28780808

3.2. Constituents of EUT

Table 3: Constituents of Samples

Description	Model	Serial Number	Manufacturer
HSDPA USB Stick	E156B	GK2AA108C0500067	HUAWEI Technologies Co., Ltd.

Note:

The EUT appearances see ANNEX H.

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-1542FCC

Page 8of 166

3.3. Test item

Table 4: Test item

device type :	portable device	
exposure category:	uncontrolled environment / general population	
device operating configurations :		
operating mode(s):	GSM850; (tested) GSM1900; (tested) WCDMA Band II; (tested) WCDMA Band V; (tested)	
Modulation:	GMSK, 8-PSK; QPSK	
GPRS mobile station class :	B	
GPRS multislots class :	12	
EGPRS multislots class:	12	
Maximum no. of timeslots in uplink:	4	
HSDPA UE category	6	
operating frequency range(s)	transmitter frequency range	receiver frequency range
GSM850: (tested)	824.2 MHz ~ 848.8 MHz	869.2 MHz ~ 893.8 MHz
GSM1900: (tested)	1850.2 MHz ~ 1909.8 MHz	1930.2 MHz ~ 1989.8 MHz
WCDMA Band II: (tested);	1852.4 MHz ~ 1907.6MHz	1932.4 MHz ~ 1987.6 MHz
WCDMA Band V: (tested)	826.4 MHz ~ 846.6 MHz	871.4 MHz ~ 891.6 MHz
Power class	GSM 850: 4, tested with power level 5	
	GSM 1900: 1, tested with power level 0	
	WCDMA Band II: 3, tested with maximum output power	
	WCDMA Band V: 3, tested with maximum output power	
Test channel (Low –Middle –High)	128-192-251 (GSM850) (tested)	
	512 - 661-810 (GSM1900) (tested)	
	9262- 9400 -9538 (WCDMA Band II) (tested)	
	4132 -4182 -4233 (WCDMA Band V) (tested)	
hardware version:	CD28TCPU	
software version:	/	
antenna type:	integrated antenna	
Used host products:	IBM T61	
	BenQ Joy book R55V	

3.4. General Description

Equipment Under Test (EUT) is a HSDPA USB Stick with internal antenna. During SAR test of the EUT, it was connected to two different portable computers. SAR is tested for the EUT respectively for GSM 850, GSM1900, WCDMA Band II and WCDMA Band V. The EUT have GPRS (class 12), EGPRS (class 12) and WCDMA/HSDPA (category 6) functions.

Since the EUT only has the data transfer function, but does not have the voice transfer function, the tests in the band of GSM850 and GSM 1900 are performed in the mode of GPRS and EGPRS, The tests in the band of WCDMA Band II and WCDMA Band V are performed in the mode of WCDMA and HSDPA .The measurements were performed in combination with two different host products (BenQ Joy book R55V and IBM T61). BenQ Joy book R55V laptop have horizontal USB slot, IBM T61 laptop has vertical USB slot.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

4. OPERATIONAL CONDITIONS DURING TEST

4.1. General description of test procedures

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

The device that connected to host computers must be tested with the device position for all applicable orientations. The measurements were performed in combination with two host products (IBM T61 and BenQ Joy book R55V).

4.2. GSM Test Configuration

For the body SAR tests for GSM 850, GSM 1900, a communication link is set up with a System Simulator (SS) by air link. The EUT is commanded to operate at maximum transmitting power. Since the EUT only has the data transfer function, but does not have the speech transfer function. The tests in the band of GSM 850, GSM 1900 are only performed in the mode of GPRS. And since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink. According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

Table 5: The allowed power reduction in the multi-slot configuration

Number of timeslots in uplink assignment	Permissible nominal reduction of maximum output power,(dB)
1	0
2	0 to 3,0
3	1,8 to 4,8
4	3,0 to 6,0

For this EUT, the tests for GSM 850 GPRS and GSM 1900 GPRS band will be performed under the following 4 setups at one same test position:

- 1) using 1 timeslot in uplink with the power of 33 dBm for GSM850 and 30 dBm for GSM1900
- 2) using 2 timeslots in uplink with the power reduced 2dB
- 3) using 3 timeslots in uplink with the power reduced 4dB
- 4) using 4 timeslots in uplink with the power reduced 6dB

After drawn the worst case, the tests will be continued to perform with the same EUT setup for the Whole tests for GSM850 GPRS and GSM1900 GPRS.

4.3. WCDMA Test Configuration

As the SAR body tests for WCDMA Band V, we established the radio link through call processing. The maximum output power were verified on high, middle and low channels for each test band according to 3GPP TS 34.121 with the following configuration:

- 1) 12.2kbps RMC, 64,144,384 kbps RMC with TPC set to all "all '1's"
- 2) Test loop Mode 1

For the output power, the configurations for the DPCCH and DPDCH₁ are as followed (EUT do not support the DPDCH_{2-n})

Table 6: The configurations for the DPCCH and DPDCH₁

	Channel Bit Rate(kbps)	Channel Symbol Rate(kcps)	Spreading Factor	Spreading Code Number	Bits/Slot
DPCCH	15	15	256	0	10
DPDCH ₁	15	15	256	64	10
	30	30	128	32	20
	60	60	64	16	40
	120	120	32	8	80
	240	240	16	4	160
	480	480	8	2	320
	960	960	4	1	640

SAR is tested with 12.2kps RMC and not required for other spreading codes (64,144, and 384 kbps RMC) and multiple DPDCH_n, because the maximum output power for each of these other configurations < 0.25dB higher than 12.2kbps RMC and the multiple DPDCH_n is not applicable for the EUT.

4.4. HSDPA Test Configuration

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average output of each RF channel with HSDPA active is at least 1/4 dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to the UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors(c, d), and HS-DPCCH

TA Technology (Shanghai) Co., Ltd.

Test Report

power offset parameters (ΔACK , ΔNACK , ΔCQI) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Table 7: Subtests for UMTS Release 5 HSDPA

Sub-set	c	d	d (SF)	d	$\beta_{hs}^{(1)}$	CM(dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note1: ΔACK , ΔNACK and $\Delta\text{CQI}=8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c=30/15 \Leftrightarrow \beta_{hs}=30/15*\beta_c$
 Note2: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$
 Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factor for the reference TFC (TFC1, TF1) to $\beta_c=11/15$ and $\beta_d=15/15$.

Table 8: Settings of required H-Set 1 QPSK in HSDPA mode

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	534
Inter-TTI Distance	TTI's	3
Number of HARQ Processes	Processes	2
Information Bit Payload (N_{INF})	Bits	3202
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	4800
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	9600
Coding Rate	/	0.67
Number of Physical Channel Codes	Codes	5
Modulation	/	QPSK

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-1542

Page 13 of 166

Table 9: HSDPA UE category

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum Transport Bits/HS-DSCH	Total Channel
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

4.5. Position of module in Portable devices

The measurements were performed in combination with two different host products (IBMT61 and BenQ Joy book R55V). BenQ Joy book R55V laptop have horizontal USB slot, IBM T61 laptop has vertical USB slot.

A test distance of 5mm or less, according to KDB 447498, should be considered for the orientation that can satisfy such requirements.

For each channel, the EUT is tested at the following 5 test positions:

- Test Position 1: The EUT is connected to the portable computer with horizontal USB slot. The back side of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 7-a)
- Test Position 2: The EUT is connected to the portable computer with horizontal USB slot. The top side of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 7-b)
- Test Position 3: The EUT is connected to the portable computer with horizontal USB slot. The front side of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 7-c)
- Test Position 4: The EUT is connected to the portable computer with vertical USB slot. The left side of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 7-d)
- Test Position 5: The EUT is connected to the portable computer with vertical USB slot. The right side of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 7-e)

4.6. Picture of host product

During the test, The IBMT61, BenQ Joy book R55V laptop were used as an assistant to help to setup communication. (See Picture 1)



Picture 1-c: BenQ Joybook R55V(118) Close



Picture 1-d: BenQ Joybook R55V(118) Open



Picture 1-e: IBM T61 Close



Picture 1-f: IBM T61 Open



Picture 1-g: BenQ Joy book R55V(118) with horizontal USB slot





Picture 1-h: IBM T61 with Vertical USB slot

Picture 1: Computer as a test assistant

5. SAR MEASUREMENTS SYSTEM CONFIGURATION

5.1. SAR Measurement Set-up

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY4 measurement server.
- The DASY4 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY4 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

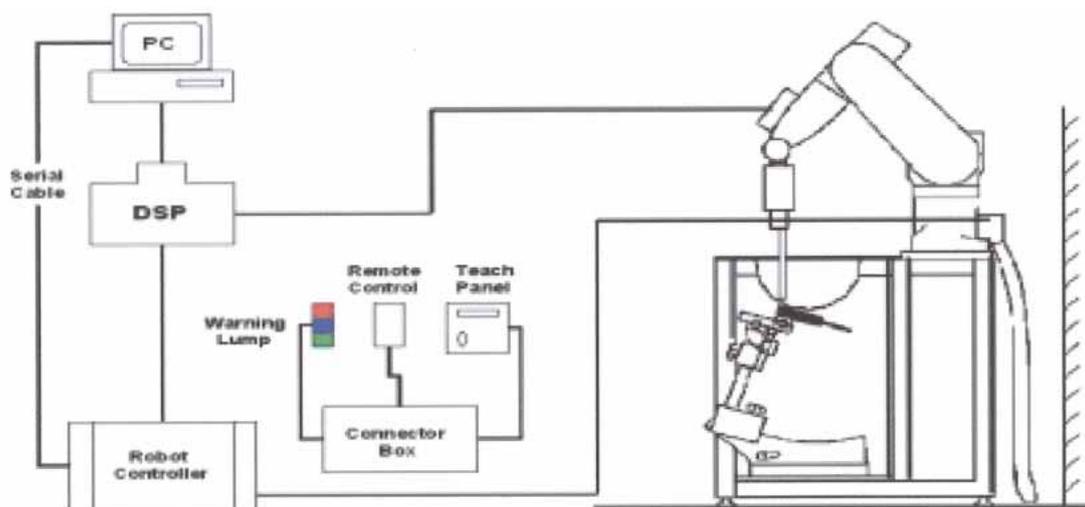


Figure 1. SAR Lab Test Measurement Set-up

5.2. Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

5.2.1. EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 900 and HSL 1750 Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



Figure 2. EX3DV4 E-field Probe



Figure 3. EX3DV4 E-field probe

5.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),
C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.
Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:
 σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m³).

5.3. Other Test Equipment

5.3.1. Device Holder for Transmitters

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r=3$ and loss tangent $\tan \delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Figure 4. Device Holder

5.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



Figure 5. Generic Twin Phantom

5.4. Scanning procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$.
- The "surface check" measurement tests the optical surface detection system of the DASY4 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- Area Scan
The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid

spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- **Zoom Scan**

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1529 standard and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY4 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

5.5. Data Storage and Evaluation

5.5.1. Data Storage

The DASY4 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai ₀ , ai ₁ , ai ₂
	- Conversion factor	ConvF _i
	- Diode compression point	Dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:
$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

H-field probes:
$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$$

With V_i = compensated signal of channel i (i = x, y, z)

$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with **SAR** = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with **P_{pwe}** = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

5.6. System validation

System validation is performed by using a validation dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaptation to SMA. It is fed with a power of 1000 mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the validation to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test.

Validation results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System validation is performed regularly on all frequency bands where tests are performed with the DASY 4 system.

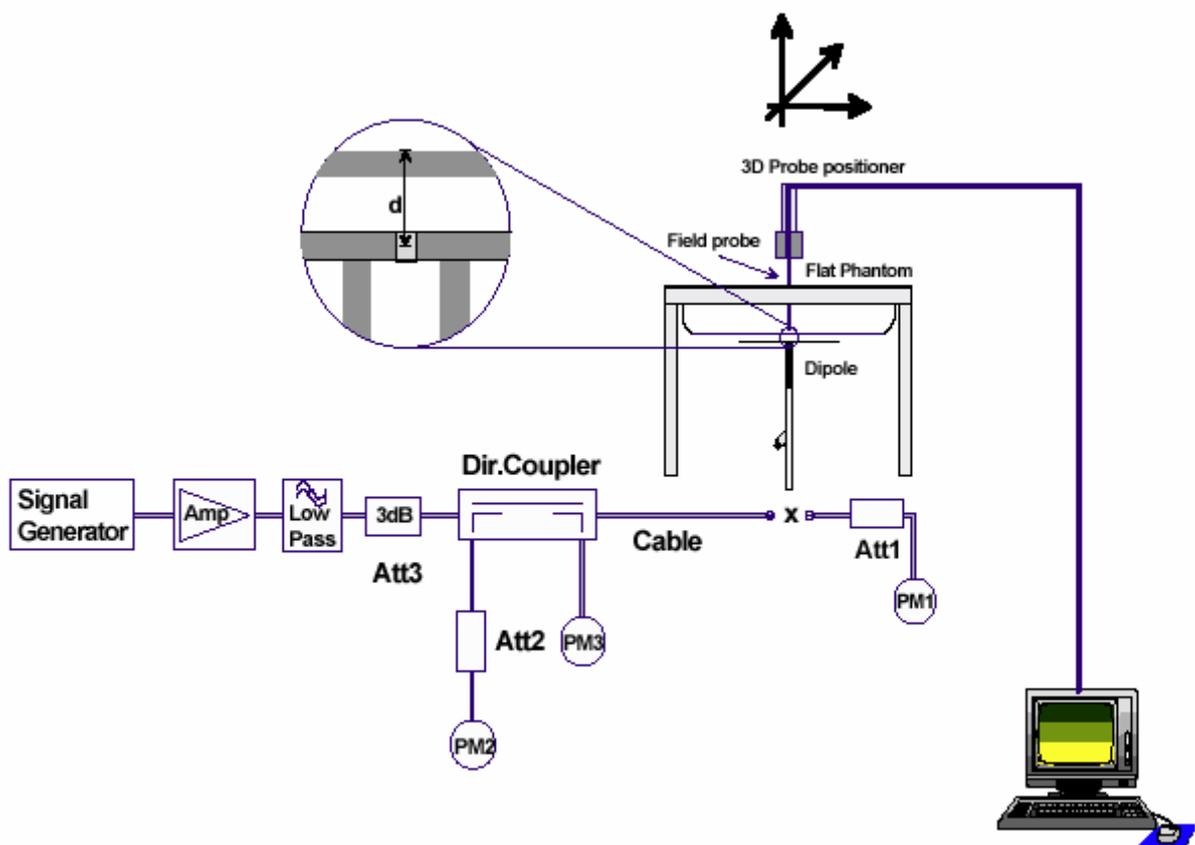


Figure 6. System validation Set-up

5.7. Equivalent Tissues

The liquid is consisted of water, sugar, salt, Glycol monobutyl, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 10 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by OET 65.

Table 10: Composition of the Body Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Body)835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

MIXTURE%	FREQUENCY (Body) 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

6. LABORATORY ENVIRONMENT

Table 11: The Ambient Conditions during Test

Temperature	Min. = 20°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

7. CHARACTERISTICS OF THE TEST

7.1. Applicable Limit Regulations

ANSI C95.1–2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

7.2. Applicable Measurement Standards

OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.

IEC 62209-2(draft)-2008: Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR)for wireless communication devices used in close proximity to the human body .(frequency rang of 30MHz to 6GHz).

8. CONDUCTED OUTPUT POWER MEASUREMENT

8.1. Summary

The DUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power. Conducted output power was measured using an integrated RF connector and attached RF cable. This result contains conducted output power for the EUT.

8.2. Conducted Power Results

Table 12: Conducted Power Measurement Results

GSM 850+GPRS	Conducted Power		
	Channel 128	Channel 192	Channel 251
Test before (dBm)	30.41	30.66	30.52
Test after (dBm)	30.40	30.64	30.50
GSM 1900+GPRS	Conducted Power		
	Channel 512	Channel 661	Channel 810
Test before (dBm)	26.28	25.79	26.24
Test after (dBm)	26.30	25.81	26.22
WCDMA Band II (12.2kbps RMC)	Conducted Power		
	Channel 9262	Channel 9400	Channel 9538
Test before (dBm)	19.54	19.58	19.63
Test after (dBm)	19.52	19.56	19.61
WCDMA Band II (64kbps RMC)	Conducted Power		
	Channel 9262	Channel 9400	Channel 9538
Test before (dBm)	19.52	19.51	19.62
Test after (dBm)	19.50	19.53	19.60
WCDMA Band II (144kbps RMC)	Conducted Power		
	Channel 9262	Channel 9400	Channel 9538
Test before (dBm)	19.37	19.57	19.65
Test after (dBm)	19.38	19.59	19.63
WCDMA Band II (384kbps RMC)	Conducted Power		
	Channel 9262	Channel 9400	Channel 9538
Test before (dBm)	19.48	19.64	19.71
Test after (dBm)	19.46	19.65	19.73

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-1542

Page 29 of 166

WCDMA Band II+HSDPA (Sub - Test 1)	Conducted Power		
	Channel 9262	Channel 9400	Channel 9538
Test before (dBm)	19.52	19.59	19.81
Test after (dBm)	19.50	19.81	19.80
WCDMA Band II+HSDPA (Sub - Test 2)	Conducted Power		
	Channel 9262	Channel 9400	Channel 9538
Test before (dBm)	18.47	18.72	18.61
Test after (dBm)	18.48	18.73	18.63
WCDMA Band II+HSDPA (Sub - Test 3)	Conducted Power		
	Channel 9262	Channel 9400	Channel 9538
Test before (dBm)	18.32	18.57	18.23
Test after (dBm)	18.30	18.58	18.21
WCDMA Band II+HSDPA (Sub - Test 4)	Conducted Power		
	Channel 9262	Channel 9400	Channel 9538
Test before (dBm)	17.97	18.12	17.63
Test after (dBm)	17.99	18.14	17.61
WCDMA Band V (12.2kbps RMC)	Conducted Power		
	Channel 4132	Channel 4182	Channel 4233
Test before (dBm)	22.07	22.34	22.15
Test after (dBm)	22.05	22.33	22.17
WCDMA Band V (64kbps RMC)	Conducted Power		
	Channel 4132	Channel 4182	Channel 4233
Test before (dBm)	22.12	22.28	22.11
Test after (dBm)	22.14	22.27	22.12
WCDMA Band V (144kbps RMC)	Conducted Power		
	Channel 4132	Channel 4182	Channel 4233
Test before (dBm)	22.14	22.37	22.13
Test after (dBm)	22.11	22.35	22.12
WCDMA Band V (384kbps RMC)	Conducted Power		
	Channel 4132	Channel 4182	Channel 4233
Test before (dBm)	22.11	22.32	22.10
Test after (dBm)	22.13	22.31	22.12
WCDMA Band V+HSDPA (Sub - Test 1)	Conducted Power		
	Channel 4132	Channel 4182	Channel 4233
Test before (dBm)	22.12	22.23	22.08

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-1542

Page 30 of 166

Test after (dBm)	22.11	22.22	22.05
WCDMA Band V+HSDPA (Sub - Test 2)	Conducted Power		
	Channel 4132	Channel 4182	Channel 4233
Test before (dBm)	20.79	21.69	21.82
Test after (dBm)	20.74	21.65	21.84
WCDMA Band V+HSDPA (Sub - Test 3)	Conducted Power		
	Channel 4132	Channel 4182	Channel 4233
Test before (dBm)	20.47	20.86	20.88
Test after (dBm)	20.48	20.87	20.85
WCDMA Band V+HSDPA (Sub - Test 4)	Conducted Power		
	Channel 4132	Channel 4182	Channel 4233
Test before (dBm)	20.51	20.64	20.79
Test after (dBm)	20.53	20.65	20.81

9. TEST RESULTS

9.1. Dielectric Performance

Table 13: Dielectric Performance of Body Tissue Simulating Liquid

Measurement is made at temperature 22.5 °C and relative humidity 51%.					
Frequency		Target value	Measurement	Difference	
835 (Body)	Permittivity ϵ_r	55.20	54.06	-2.07	%
	Conductivity σ	0.97	0.98	1.03	%
1900 (Body)	Permittivity ϵ_r	53.30	53.23	-0.13	%
	Conductivity σ	1.52	1.56	2.63	%

9.2. System Validation

Table 14: System Validation

Measurement is made at temperature 23.2 °C, relative humidity 50%, and input power 250 mW. Liquid temperature during the test: 22.3°C							
Liquid parameters	Frequency	Permittivity ϵ		Conductivity σ (S/m)			
	835MHz	41.75		0.92			
	1900MHz	39.70		1.41			
Verification results	Frequency	Target value (W/kg)		Measurement value (W/kg)		Difference percentage	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1g Average
	835MHz	1.52	2.30	1.50	2.30	-1.32%	0.00%
	1900MHz	5.06	9.84	5.09	9.74	0.59%	-1.02%

Note:

- a. Target Values used derive from the SPEAG calibration certificate and 250 mW is used as feeding power to the validation dipole (SPEAG using).
- b. The graph results see ANNEX C.

9.3. Summary of Measurement Results

9.3.1. GSM850 (GPRS/EGPRS)

Table 15: SAR Values [GSM850 (GPRS/EGPRS)]

Liquid Temperature: 22.4°C; relative humidity: 50%						
Limit of SAR (W/kg)			10 g Average	1g Average	Power Drift(dB)	Graph Results
			2.0	1.6	± 0.21	
Test Case Of Body			Measurement Result (W/kg)		Power Drift(dB)	
Different Test Position	Different Timeslots	Channel	10 g Average	1 g Average		
BenQ Joy book R55V						
Test Position 1	4 timeslots	Middle	0.363(max.cube)	0.564(max.cube)	-0.032	Figure 7
	3 timeslots	Middle	0.470(max.cube)	0.734(max.cube)	0.135	Figure 9
	2 timeslots	High	0.553(max.cube)	0.863(max.cube)	0.099	Figure 11
		Middle	0.559(max.cube)	0.870(max.cube)	-0.026	Figure 13
		Low	0.519(max.cube)	0.807(max.cube)	-0.031	Figure 15
	1 timeslot	Middle	0.489(max.cube)	0.764(max.cube)	0.134	Figure 17
Test Position 2	2 timeslots	Middle	0.051	0.117	-0.173	Figure 19
Test Position 3	2 timeslots	Middle	0.392	0.562	-0.028	Figure 21
IBM T61						
Test Position 4	2 timeslots	Middle	0.329	0.514	-0.143	Figure 23
Test Position 5	2 timeslots	Middle	0.356	0.560	-0.186	Figure 25
Worst case position with EGPRS						
Test Position 1	2 timeslots	Middle	0.226(max.cube)	0.350(max.cube)	0.140	Figure 27

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX B).

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-1542

Page 33 of 166

Table 16: SAR Values (GSM850, BenQ Joy book R55V, enhanced energy coupling at increased separation distances)

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 1	initial position	Middle	1.128	0.564	1.410
	5mm	Middle	0.648		
	10mm	Middle	0.391		

- Note: 1. The probe tip location is fixed at the distance of one half the probe tip diameter from the phantom surface.
2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

TA Technology (Shanghai) Co., Ltd.

Test Report

No. RZA2008-1542

Page 34 of 166

9.3.2. GSM1900 (GPRS/EGPRS)

Table 17: SAR Values [GSM1900 (GPRS/EGPRS)]

Liquid Temperature: 22.4°C; relative humidity: 50%						
Limit of SAR (W/kg)			10 g Average	1g Average	Power Drift(dB)	Graph Results
			2.0	1.6	± 0.21	
Test Case Of Body			Measurement Result (W/kg)		Power Drift(dB)	
Different Test Position	Different Timeslots	Channel	10 g Average	1 g Average		
BenQ Joy book R55V						
Test Position 1	4 timeslots	Middle	0.368	0.697	-0.063	Figure 29
	3 timeslots	High	0.459	0.875	0.003	Figure 31
		Middle	0.440	0.840	0.016	Figure 33
		Low	0.446	0.847	0.061	Figure 35
	2 timeslots	High	0.501	0.956	-0.025	Figure 37
		Middle	0.475	0.902	0.017	Figure 39
		Low	0.476	0.905	0.036	Figure 41
1 timeslot	Middle	0.380	0.721	0.069	Figure 43	
Test Position 2	2 timeslots	Middle	0.113	0.233	-0.008	Figure 45
Test Position 3	2 timeslots	High	0.412	0.807	0.052	Figure 47
		Middle	0.420	0.821	-0.046	Figure 49
		Low	0.433	0.850	-0.003	Figure 51
IBM T61						
Test Position 4	2 timeslots	Middle	0.258	0.510	-0.187	Figure 53
Test Position 5	2 timeslots	Middle	0.195	0.352	0.178	Figure 55
Worst case position with EGPRS						
Test Position 1	2 timeslots	High	0.388	0.722	-0.049	Figure 57

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.

Table 18: SAR Values (GSM1900, BenQ Joy book R55V, enhanced energy coupling at increased separation distances)

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 3	initial position	High	1.198	0.599	1.497
	5mm	High	0.564		

- Note: 1. The probe tip location is fixed at the distance of one half the probe tip diameter from the phantom surface.
2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

TA Technology (Shanghai) Co., Ltd.

Test Report

No. RZA2008-1542

Page 36 of 166

9.3.3. WCDMA Band II (HSDPA)

Table 19: SAR Values [WCDMA Band II/HSDPA]

Liquid Temperature: 22.4°C; relative humidity: 50%					
Limit of SAR (W/kg)		10 g Average	1g Average	Power Drift(dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Body		Measurement Result (W/kg)		Power Drift(dB)	
Different Test Position	Channel	10 g Average	1 g Average		
BenQ Joy book R55V					
Test Position 1	Middle	0.322	0.593	0.077	Figure 59
Test Position 2	Middle	0.080	0.161	-0.050	Figure 61
Test Position 3	High	0.298	0.667	0.074	Figure 63
	Middle	0.318	0.624	-0.099	Figure 65
	Low	0.413	0.809	0.013	Figure 67
IBM T61					
Test Position 4	Middle	0.172	0.316	-0.174	Figure 69
Test Position 5	Middle	0.227	0.449	0.157	Figure 71
Worst case position with HSDPA					
Test Position 3	Low	0.387	0.746	0.006	Figure 73

Note: 1. The value with blue color is the maximum SAR Value of each test band.

- The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (<0.8 W/kg) lower than the SAR limit, testing at the high and low channels is optional.
- Upper and lower frequencies were measured at the worst case.

Table 20: SAR Values (WCDMA Band II, BenQ Joy book R55V, enhanced energy coupling at increased separation distances)

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 3	initial position	Low	1.059	0.529	1.324
	5mm	Low	0.431		

- Note: 1. The probe tip location is fixed at the distance of one half the probe tip diameter from the phantom surface.
- when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
 - A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

TA Technology (Shanghai) Co., Ltd.

Test Report

No. RZA2008-1542

Page 37 of 166

9.3.4. WCDMA Band V (HSDPA)

Table 21: SAR Values [WCDMA Band V /HSDPA]

Liquid Temperature: 22.4°C;relative humidity:50%					
Limit of SAR (W/kg)		10 g Average	1g Average	Power Drift(dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Body		Measurement Result (W/kg)		Power Drift(dB)	
Different Test Position	Channel	10 g Average	1 g Average		
BenQ Joy book R55V					
Test Position 1	High	0.449	0.701	-0.198	Figure 75
	Middle	0.404	0.643	0.006	Figure 77
	Low	0.475	0.745	-0.001	Figure 79
Test Position 2	Middle	0.019	0.047	0.182	Figure 81
Test Position 3	Middle	0.186	0.314	0.122	Figure 83
IBM T61					
Test Position 4	Middle	0.187	0.297	0.019	Figure 85
Test Position 5	Middle	0.180	0.283	0.147	Figure 87
Worst case position with HSDPA					
Test Position 1	Low	0.404	0.618	-0.186	Figure 89

Note: 1. The value with blue color is the maximum SAR Value of each test band.

- The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (<0.8 W/kg) lower than the SAR limit, testing at the high and low channels is optional.
- Upper and lower frequencies were measured at the worst case.

Table 22: SAR Values (WCDMA Band V, BenQ Joy book R55V, enhanced energy coupling at increased separation distances)

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 1	initial position	Low	0.898	0.449	1.123
	5mm	Low	0.513		
	10mm	Low	0.315		

- Note: 1. The probe tip location is fixed at the distance of one half the probe tip diameter from the phantom surface.
- when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
 - A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

9.4. Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 7.2 of this report. Maximum localized SAR is 0.956w/kg that is below exposure limits specified in the relevant standards cited in Clause 7.1 of this test report.

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-1542

Page 39 of 166

10. MEASUREMENT UNCERTAINTY

No.	a	Type	c	d	e=f(d, k)	f	h=cxf / e	k
	Uncertainty Component		Tol. (±%)	Prob. Dist	Div.	c ₁ (1g)	1g u (± %)	v ₁
1	System repetivity	A	0.5	N	1	1	0.5	9
Measurement system								
2	Probe Calibration	B	5	N	2	1	2.5	∞
3	Axial isotropy	B	4.7	R	$\sqrt{3}$	$(1-c_p)_{1/2}$	4.3	∞
4	Hemisphere Isotropy	B	9.4	R	$\sqrt{3}$	$\sqrt{C_P}$		∞
5	Boundary Effect	B	0.4	R	$\sqrt{3}$	1	0.23	∞
6	Linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
7	System Detection Limits	B	1.0	R	$\sqrt{3}$	1	0.6	∞
8	Readout Electronics	B	1.0	N	1	1	1.0	∞
9	RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	∞
10	Probe Positioner Mechanical Tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	∞
11	Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
12	Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
Test Sample Related								
13	Test Sample Positioning	A	4.9	N	1	1	4.9	N-1
14	Device Holder Uncertainty	A	6.1	N	1	1	6.1	N-1
15	Output Power Variation-SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	∞
Phantom and Tissue Parameters								
16	Phantom Uncertainty(shape and thickness tolerances)	B	1.0	R	$\sqrt{3}$	1	0.6	∞
17	Liquid Conductivity-deviation from target values	B	5.0	R	$\sqrt{3}$	0.64	1.7	∞
18	Liquid Conductivity-measurement uncertainty	B	5.0	N	1	0.64	1.7	M
19	Liquid Permittivity-deviation from target values	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
20	Liquid Permittivity- measurement uncertainty	B	5.0	N	1	0.6	1.7	M
Combined Standard Uncertainty							11.25	
Expanded Uncertainty (95 % CONFIDENCE INTERVAL)							22.5	

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-1542

Page 40 of 166

11. MAIN TEST INSTRUMENTS

Table 23: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 14, 2008	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 14, 2008	One year
04	Power sensor	Agilent 8481H	MY41091316	March 14, 2008	One year
05	Signal Generator	HP 8341B	2730A00804	September 14, 2008	One year
06	Amplifier	IXA-020	0401	No Calibration Requested	
07	Validation Kit 835MHz	D835V2	4d020	July 21, 2008	One year
08	Validation Kit 1900MHz	D1900V2	5d060	July 22, 2008	One year
09	BTS	E5515C	GB46490218	September 14, 2008	One year
10	E-field Probe	EX3DV4	3660	September 3, 2008	One year
11	DAE	DAE3	536	August 28, 2008	One year

12. TEST PERIOD

The test is performed in December 22, 2008 to December 23, 2008

13. TEST LOCATION


The test is performed at TA Technology (Shanghai) Co., Ltd.

END OF REPORT BODY

ANNEX A: TEST LAYOUT



Picture 2 Specific Absorption Rate Test Layout

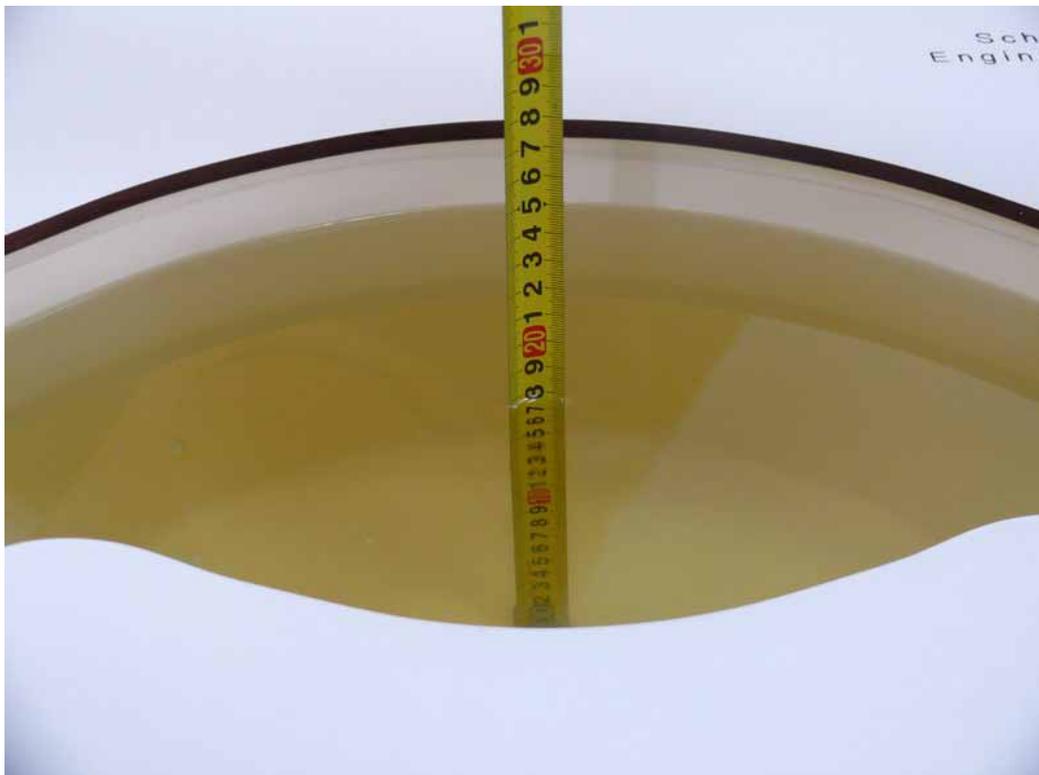

Picture 3 Liquid depth in the Flat Phantom (835 MHz)



Picture 4 Liquid depth in the Flat Phantom (1900 MHz)

ANNEX B: GRAPH RESULTS

Date/Time: 12/22/2008 5:48:59 PM

GSM 850 GPRS (4 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Communication System: GSM 850+GPRS(4Up); Frequency: 837 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.986 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 1 Middle/Area Scan (41x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.695 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.9 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.877 W/kg

SAR(1 g) = 0.564 mW/g; SAR(10 g) = 0.363 mW/g

Maximum value of SAR (measured) = 0.695 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.9 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.710 W/kg

SAR(1 g) = 0.422 mW/g; SAR(10 g) = 0.247 mW/g

Maximum value of SAR (measured) = 0.570 mW/g

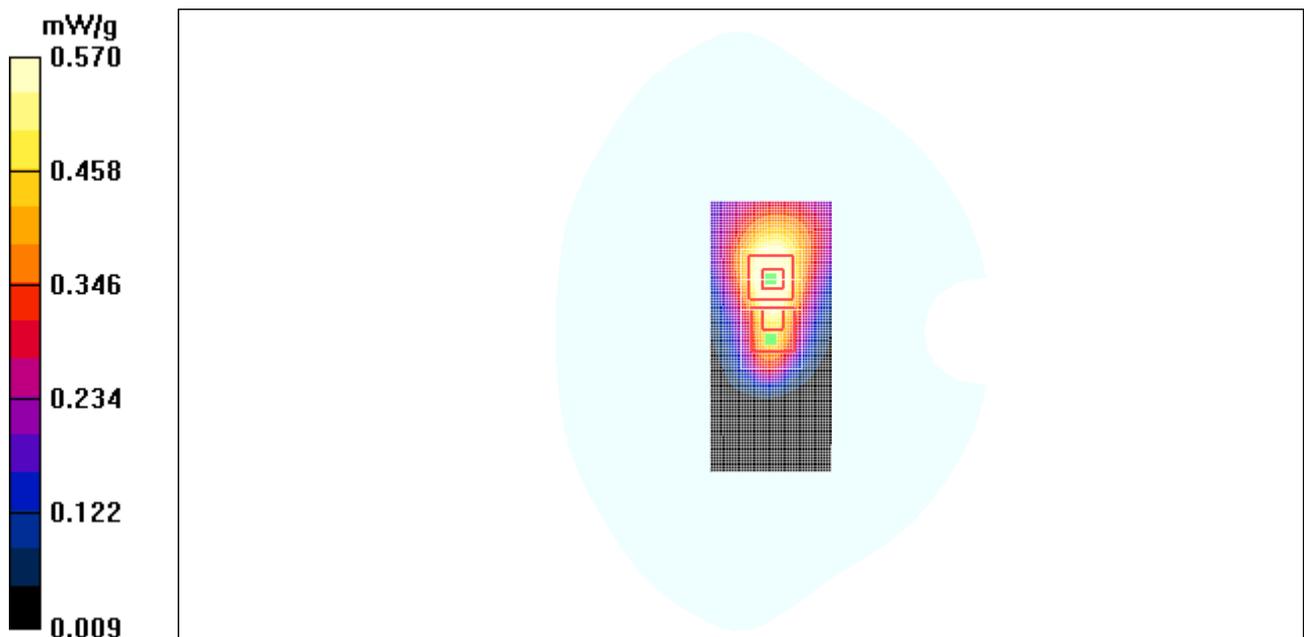


Figure 7 GSM 850 GPRS (4 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 192

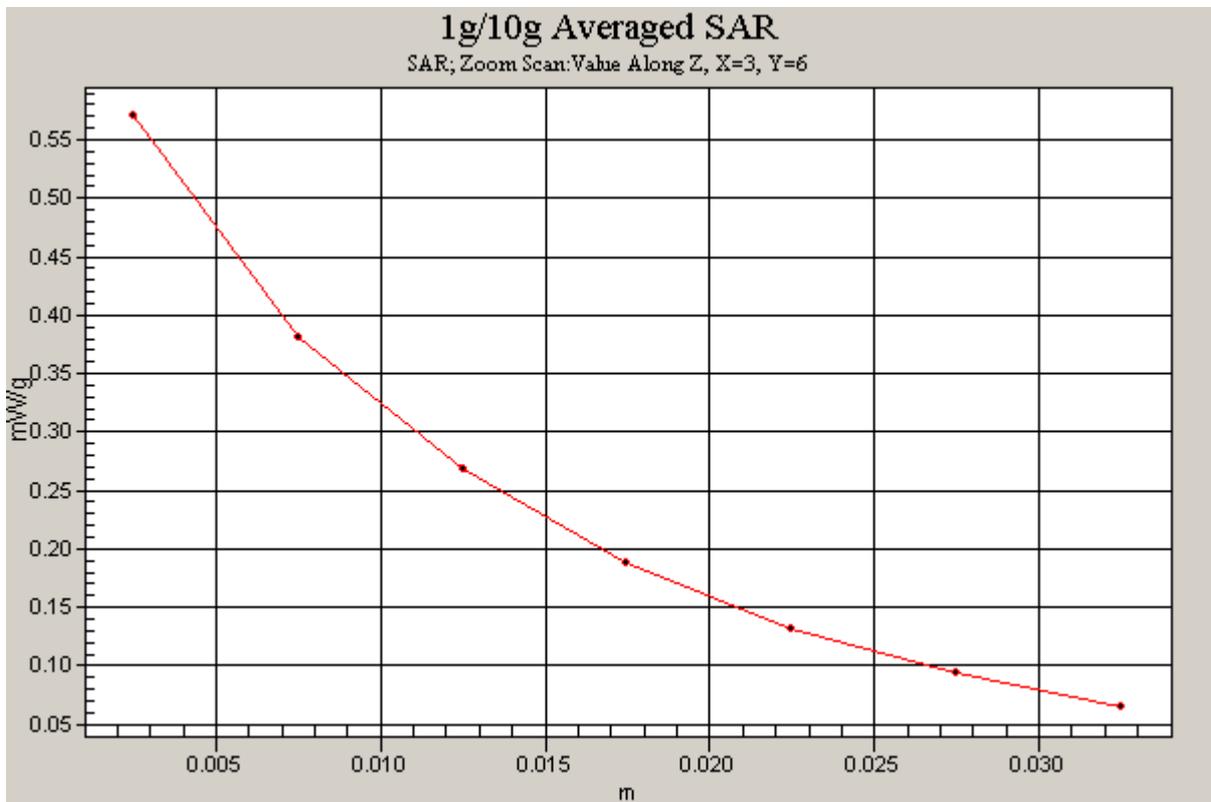
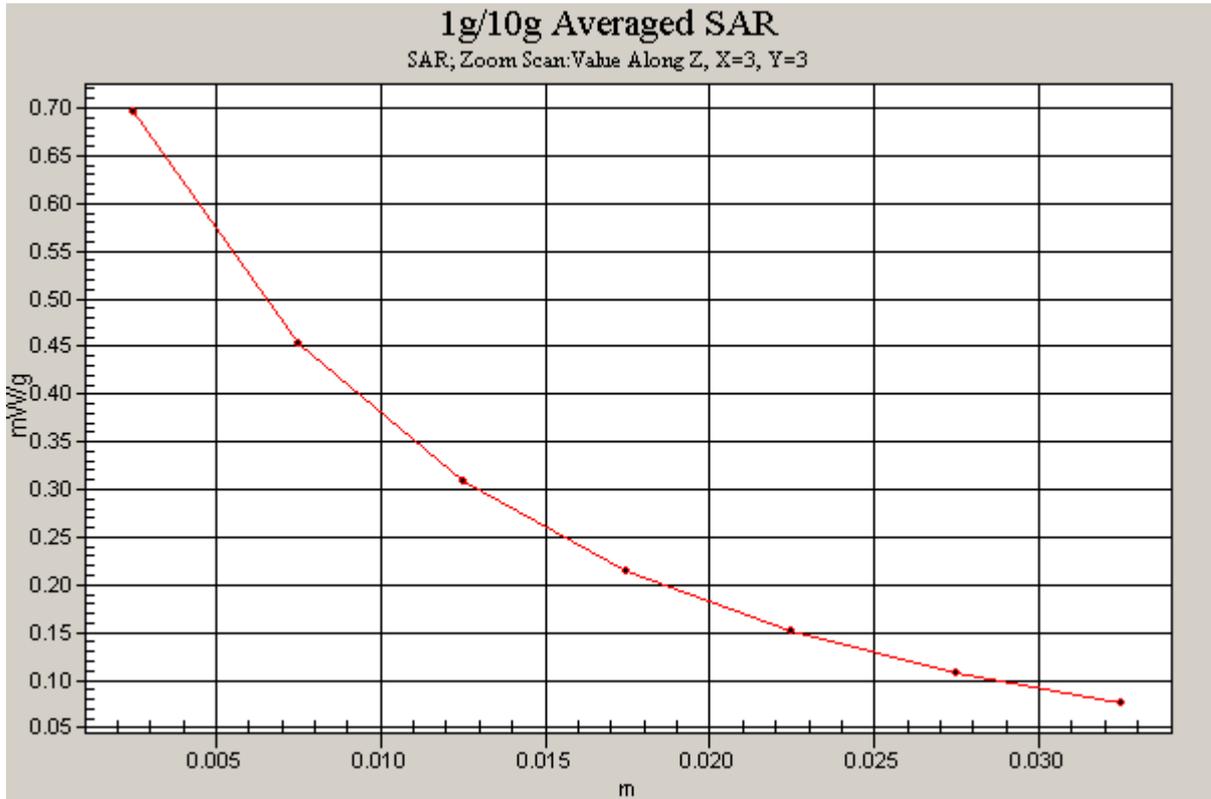


Figure 8 Z-Scan at power reference point [GSM 850 GPRS (4 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 192]

Date/Time: 12/22/2008 5:20:02 PM

GSM 850 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Communication System: GSM 850+GPRS(3Up); Frequency: 837 MHz; Duty Cycle: 1:2.67

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.986 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 1 Middle/Area Scan (41x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.892 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.7 V/m; Power Drift = 0.135 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.734 mW/g; SAR(10 g) = 0.470 mW/g

Maximum value of SAR (measured) = 0.907 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.7 V/m; Power Drift = 0.135 dB

Peak SAR (extrapolated) = 0.915 W/kg

SAR(1 g) = 0.547 mW/g; SAR(10 g) = 0.321 mW/g

Maximum value of SAR (measured) = 0.740 mW/g

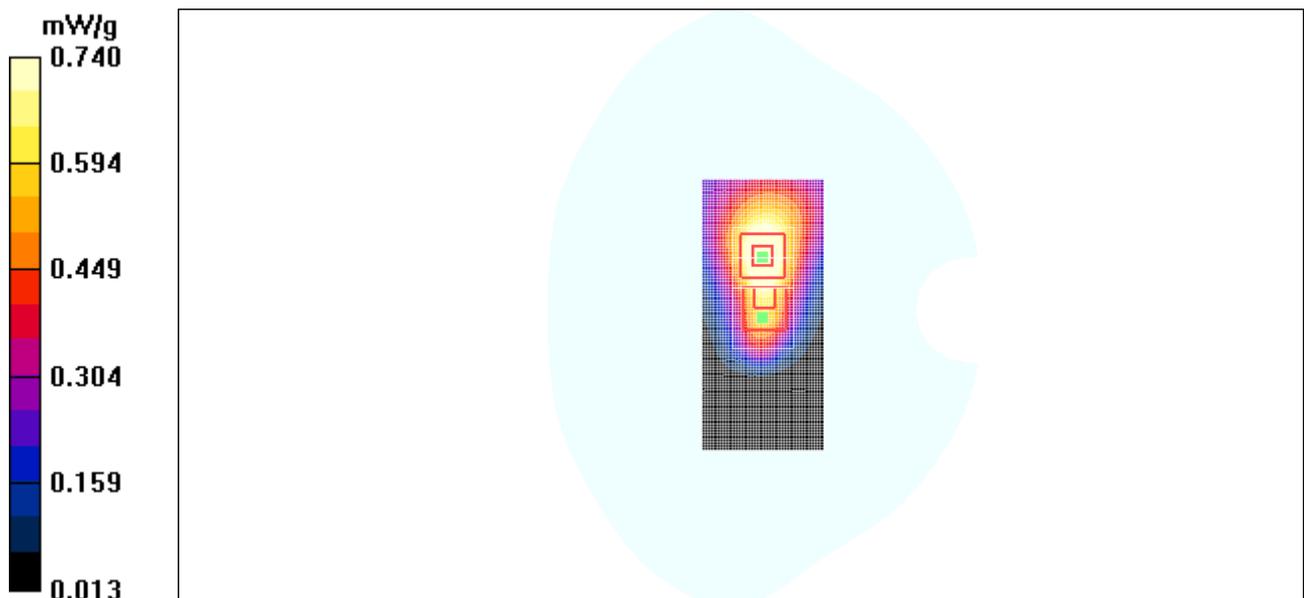


Figure 9 GSM 850 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 192

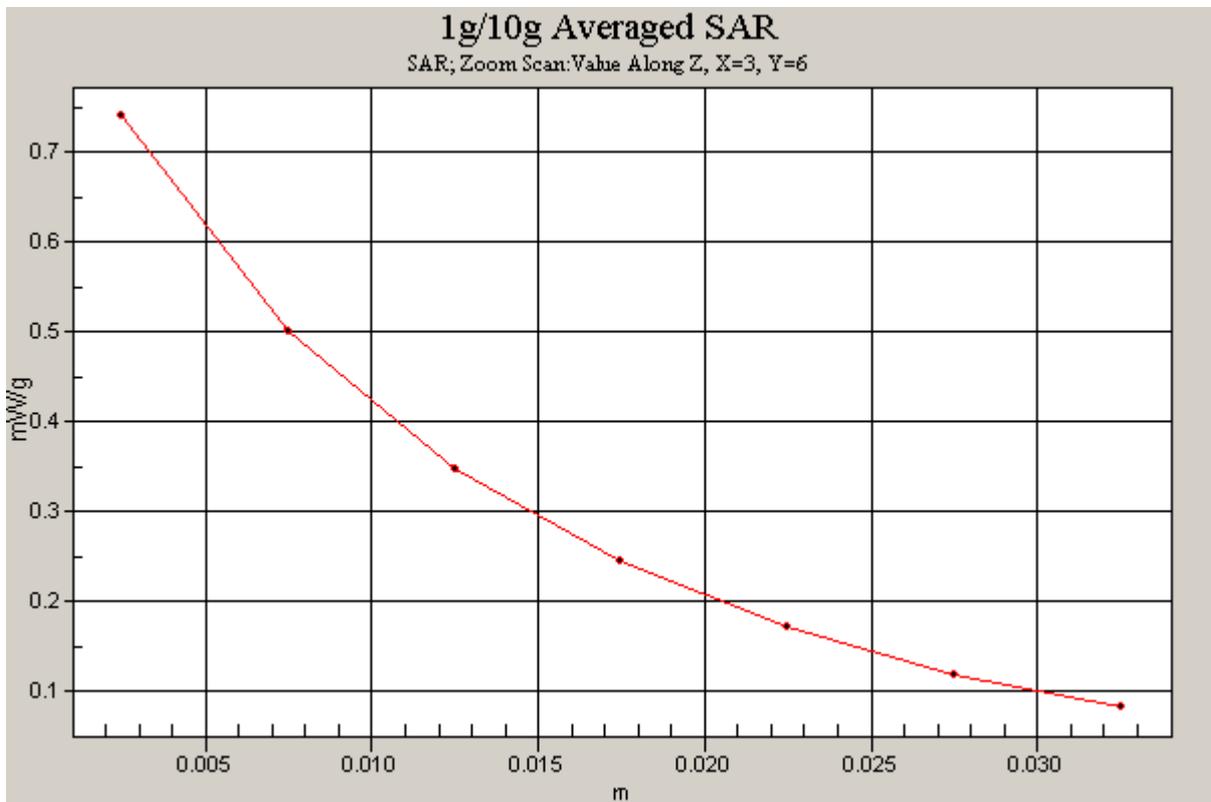
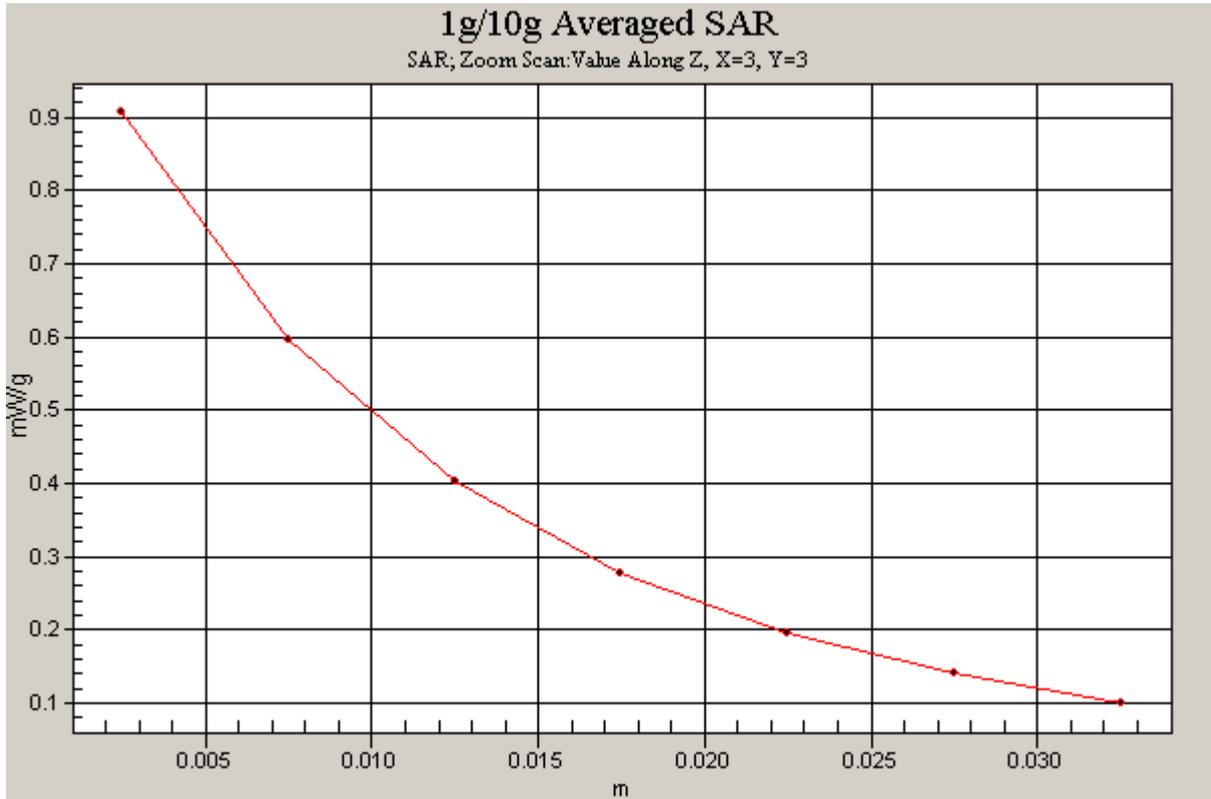


Figure 10 Z-Scan at power reference point [GSM 850 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 192]

Date/Time: 12/22/2008 7:18:03 PM

GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 High Frequency

Communication System: GSM850 + GPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 849$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 1 High/Area Scan (41x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.05 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.5 V/m; Power Drift = 0.099 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.863 mW/g; SAR(10 g) = 0.553 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.5 V/m; Power Drift = 0.099 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.638 mW/g; SAR(10 g) = 0.374 mW/g

Maximum value of SAR (measured) = 0.862 mW/g

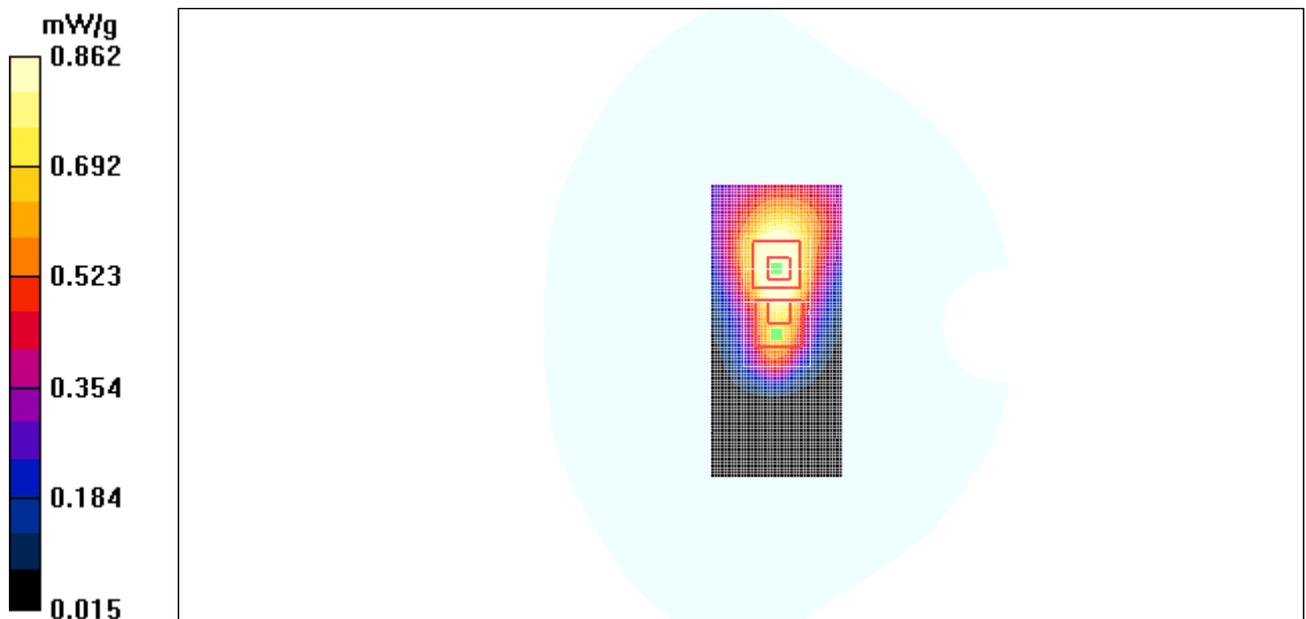


Figure 11 GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 251

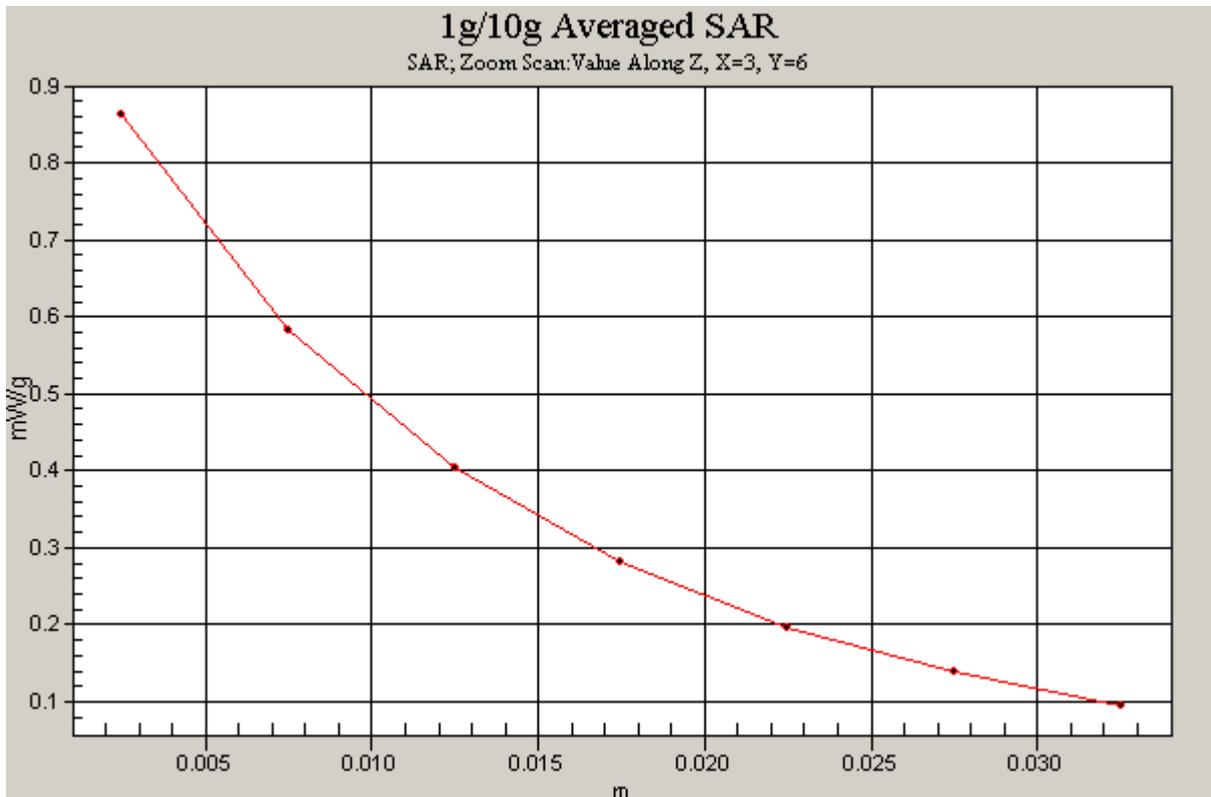
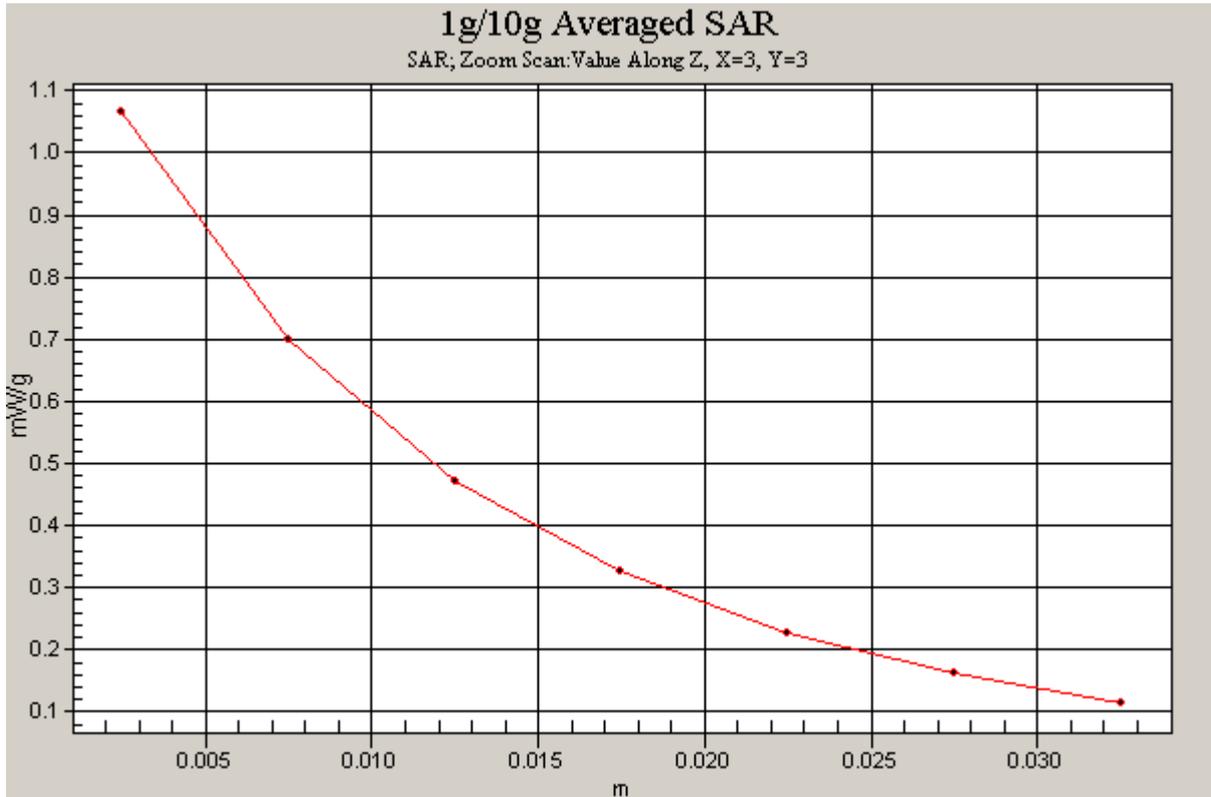


Figure 12 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 251]

Date/Time: 12/22/2008 6:48:50 PM

GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.986 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 1 Middle/Area Scan (41x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.09 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.8 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.870 mW/g; SAR(10 g) = 0.559 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.8 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.646 mW/g; SAR(10 g) = 0.379 mW/g

Maximum value of SAR (measured) = 0.868 mW/g

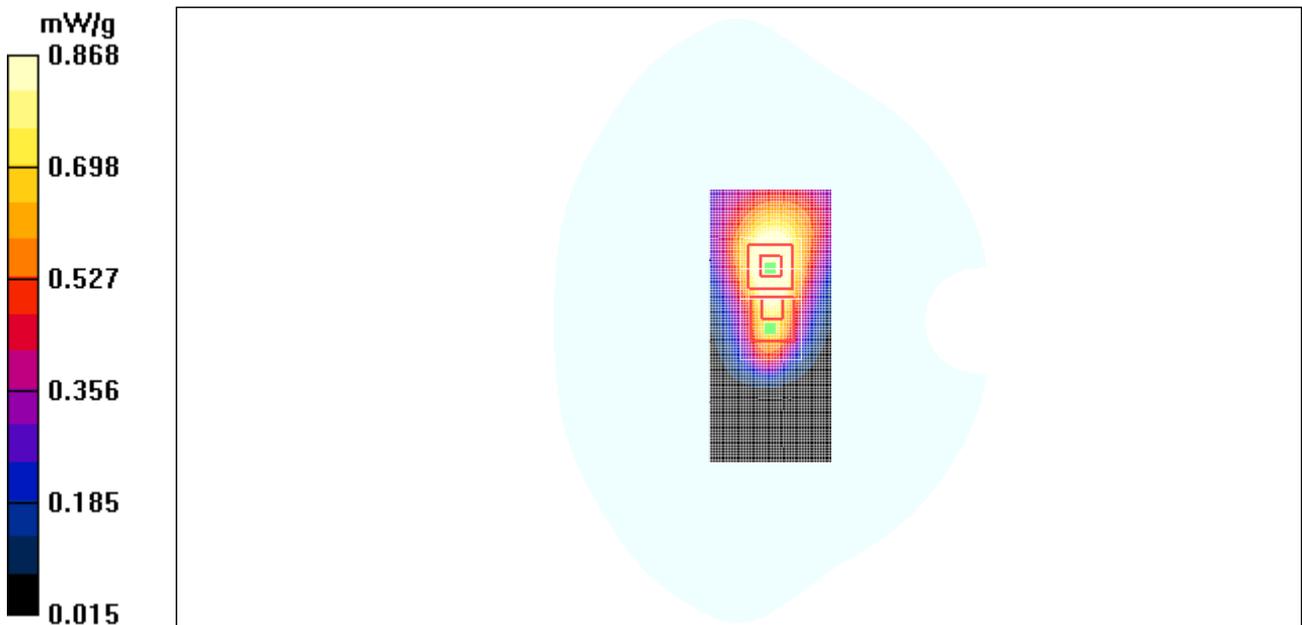


Figure 13 GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 192

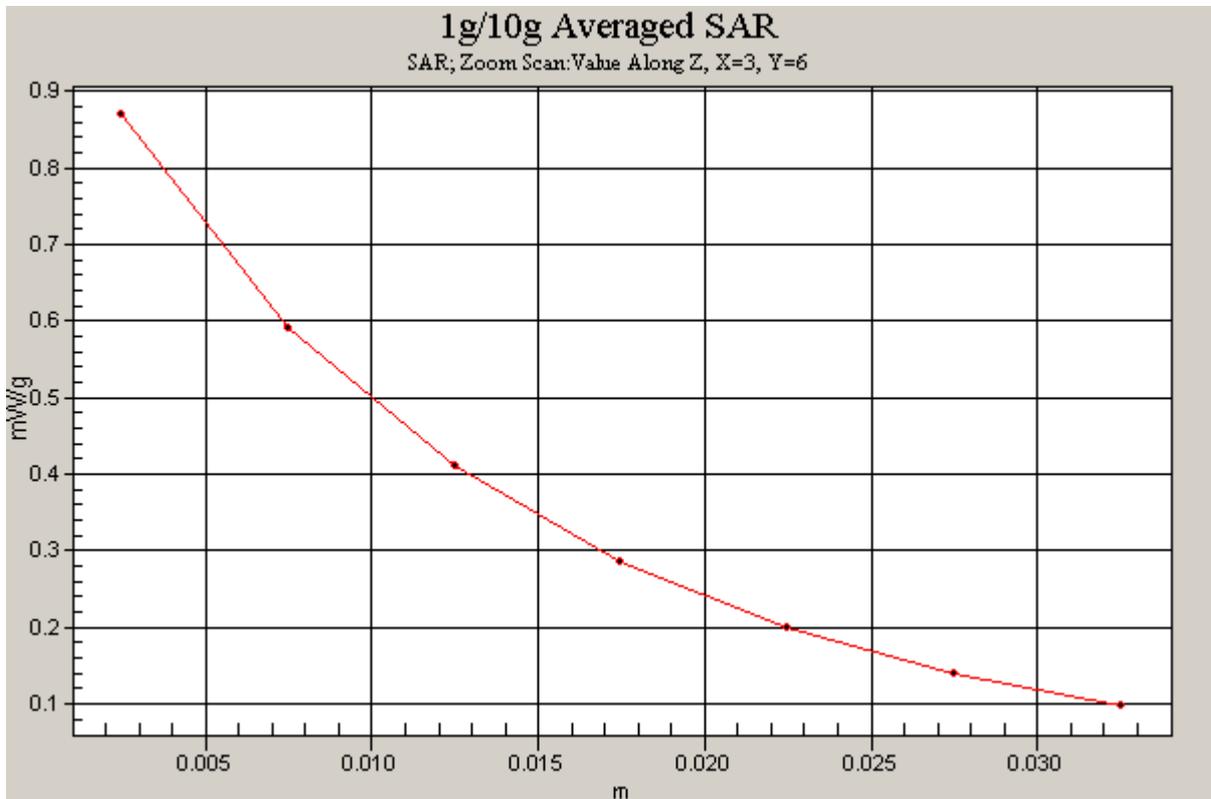
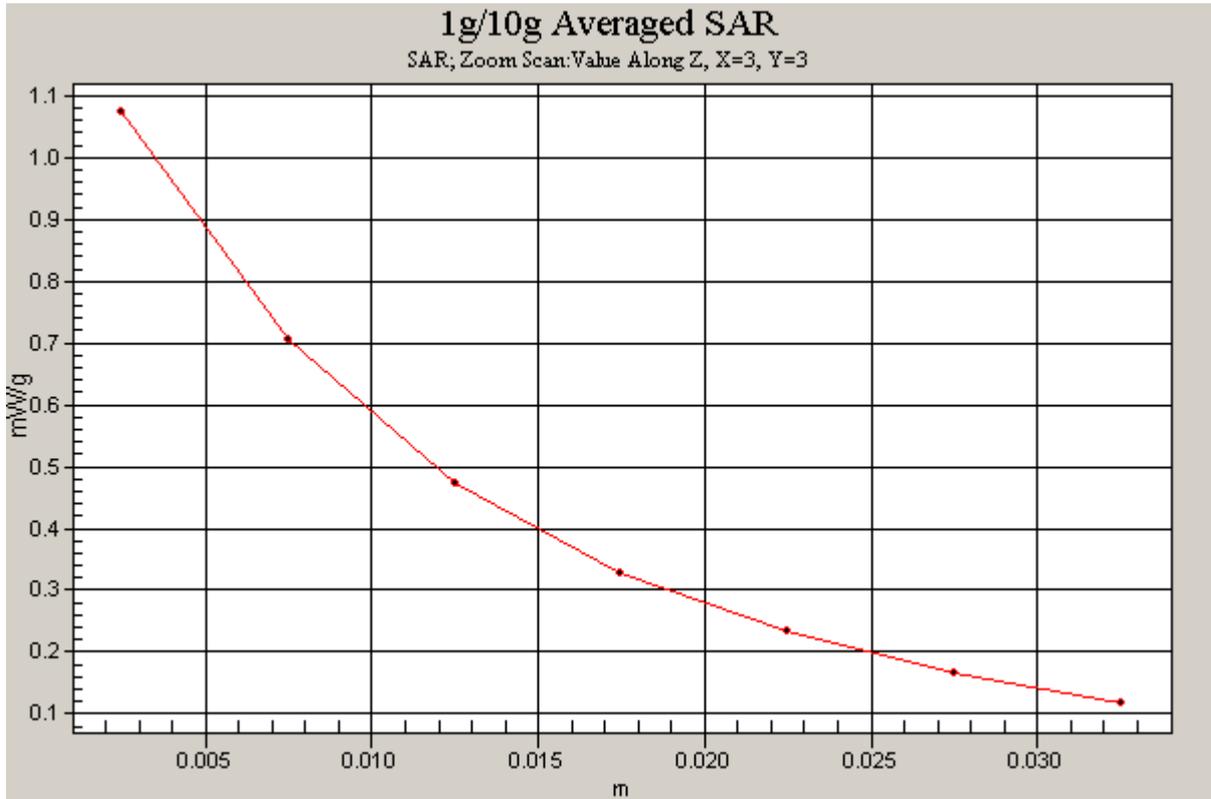


Figure 14 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 192]

Date/Time: 12/22/2008 7:46:38 PM

**GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1
Low Frequency**

Communication System: GSM850 + GPRS(2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 1 Low/Area Scan (41x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.987 mW/g

Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.3 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.807 mW/g; SAR(10 g) = 0.519 mW/g

Maximum value of SAR (measured) = 0.989 mW/g


Test Position 1 Low/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.3 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.994 W/kg

SAR(1 g) = 0.606 mW/g; SAR(10 g) = 0.357 mW/g

Maximum value of SAR (measured) = 0.810 mW/g

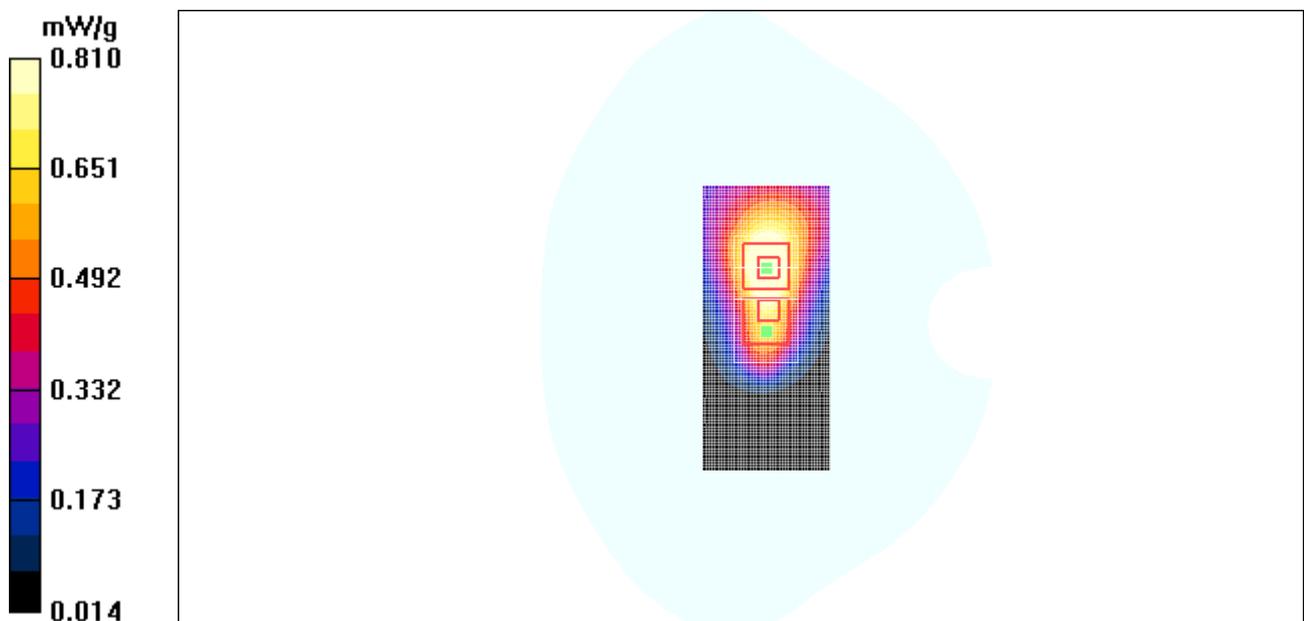

**Figure 15 GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1
Channel 128**

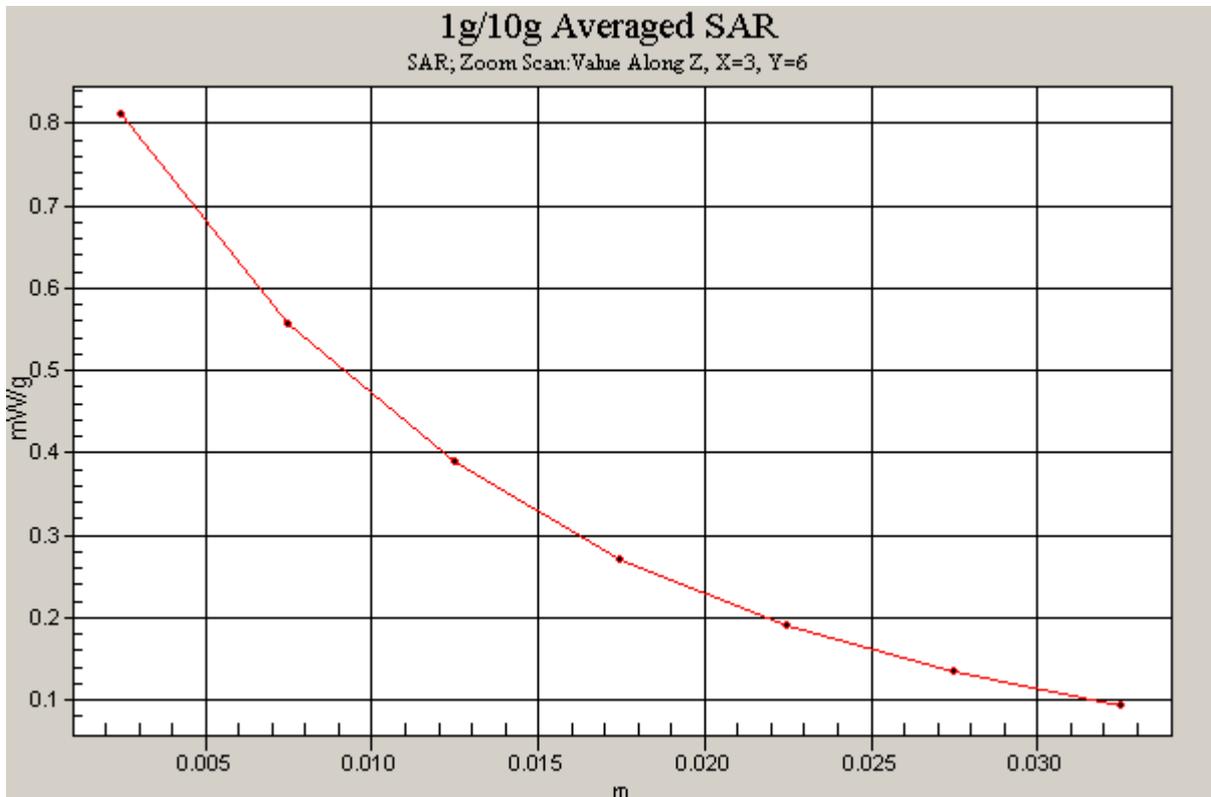
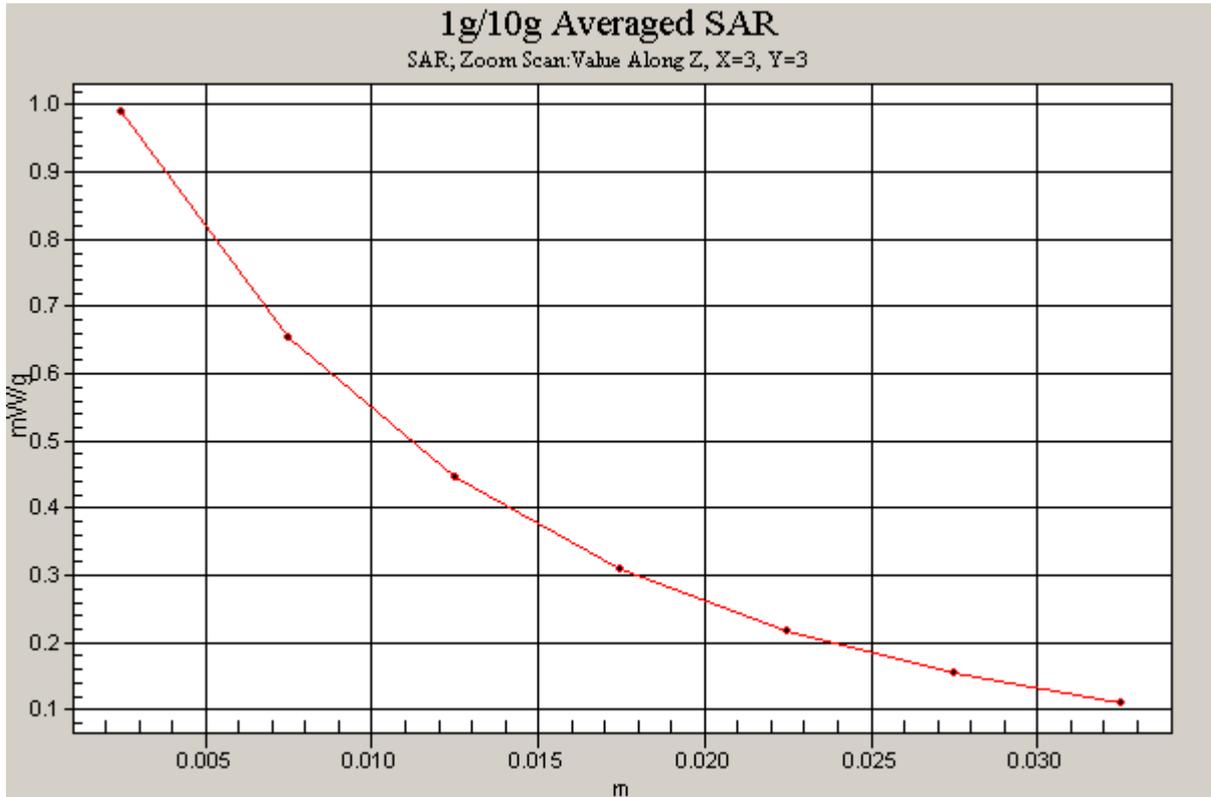


Figure 16 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 128]

GSM 850 GPRS (1 timeslot in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Communication System: GSM850 + GPRS(1Up); Frequency: 837 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.986 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 1 Middle/Area Scan (41x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.899 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.5 V/m; Power Drift = 0.134 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.764 mW/g; SAR(10 g) = 0.489 mW/g

Maximum value of SAR (measured) = 0.938 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.5 V/m; Power Drift = 0.134 dB

Peak SAR (extrapolated) = 0.944 W/kg

SAR(1 g) = 0.572 mW/g; SAR(10 g) = 0.336 mW/g

Maximum value of SAR (measured) = 0.764 mW/g

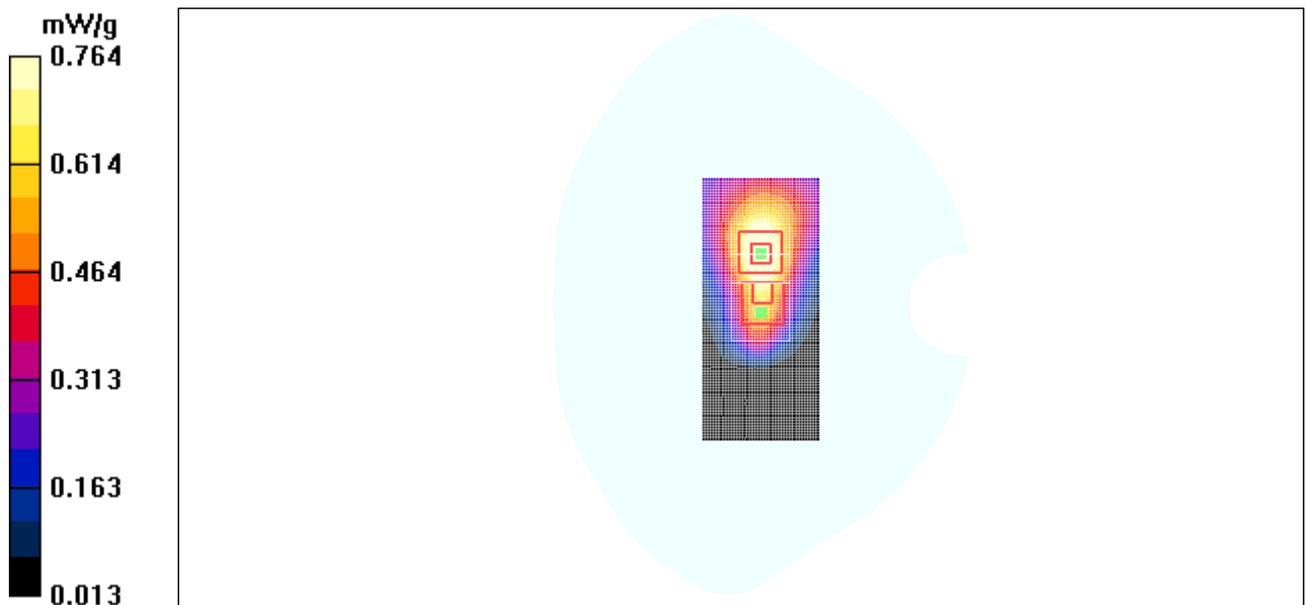


Figure 17 GSM 850 GPRS (1 timeslot in uplink) with BenQ Joybook R55V Test Position 1 Channel 192

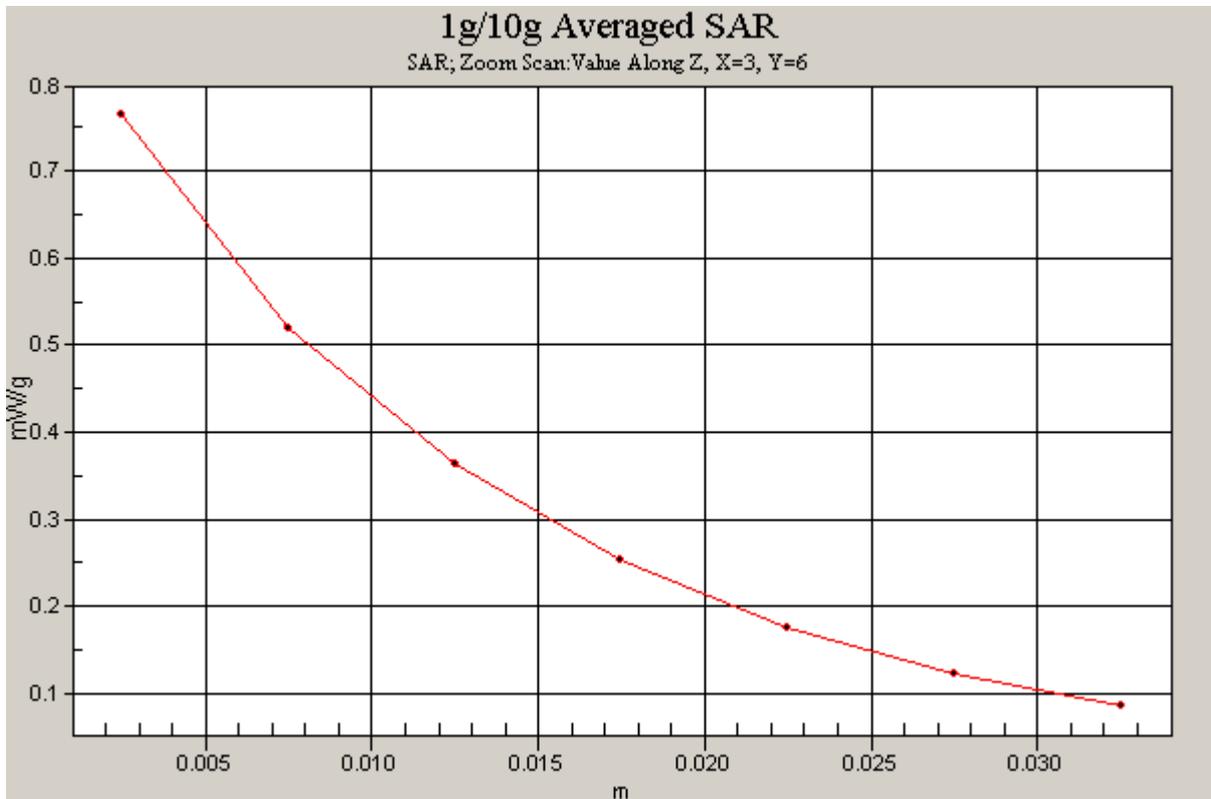
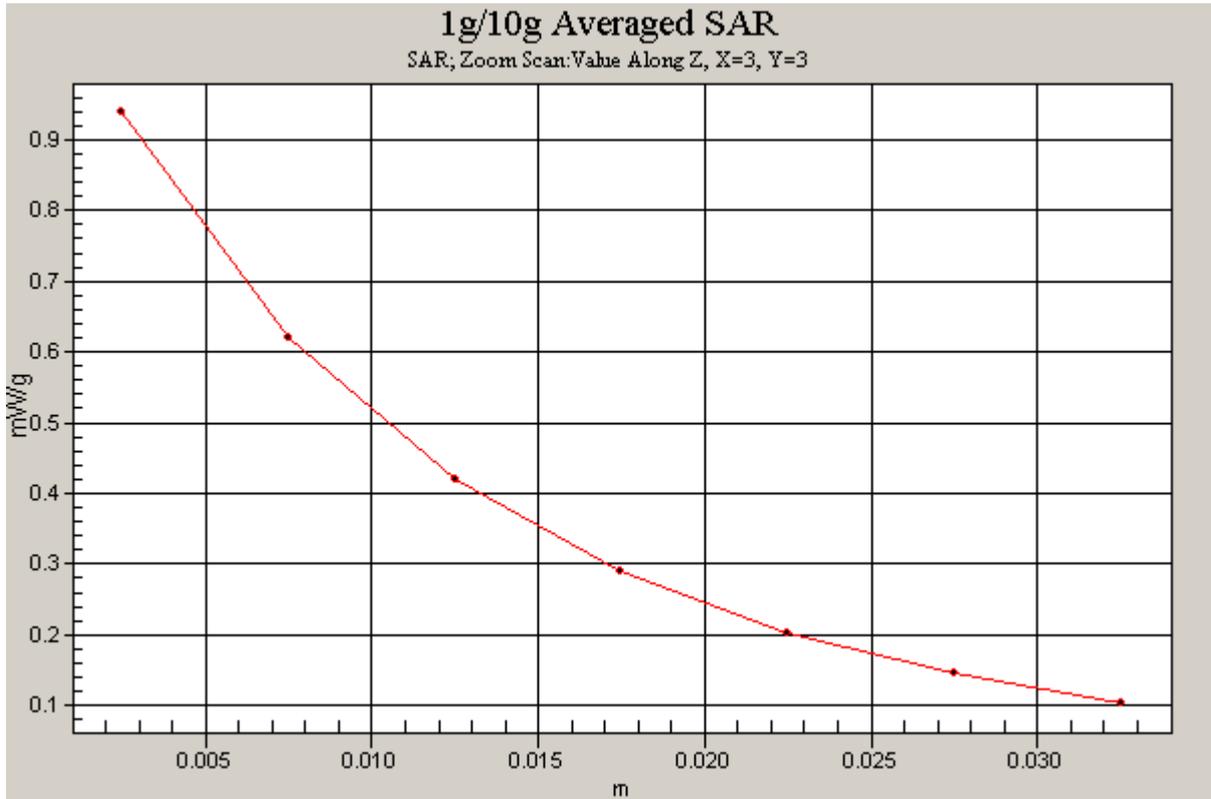


Figure 18 Z-Scan at power reference point [GSM 850 GPRS (1 timeslot in uplink) with BenQ Joybook R55V Test Position 1Channel 192]

Date/Time: 12/22/2008 8:50:55 PM

GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Middle Frequency

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 837$ MHz; $\sigma = 0.986$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 2 Middle/Area Scan (51x51x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.113 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.9 V/m; Power Drift = -0.173 dB

Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.117 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.191 mW/g

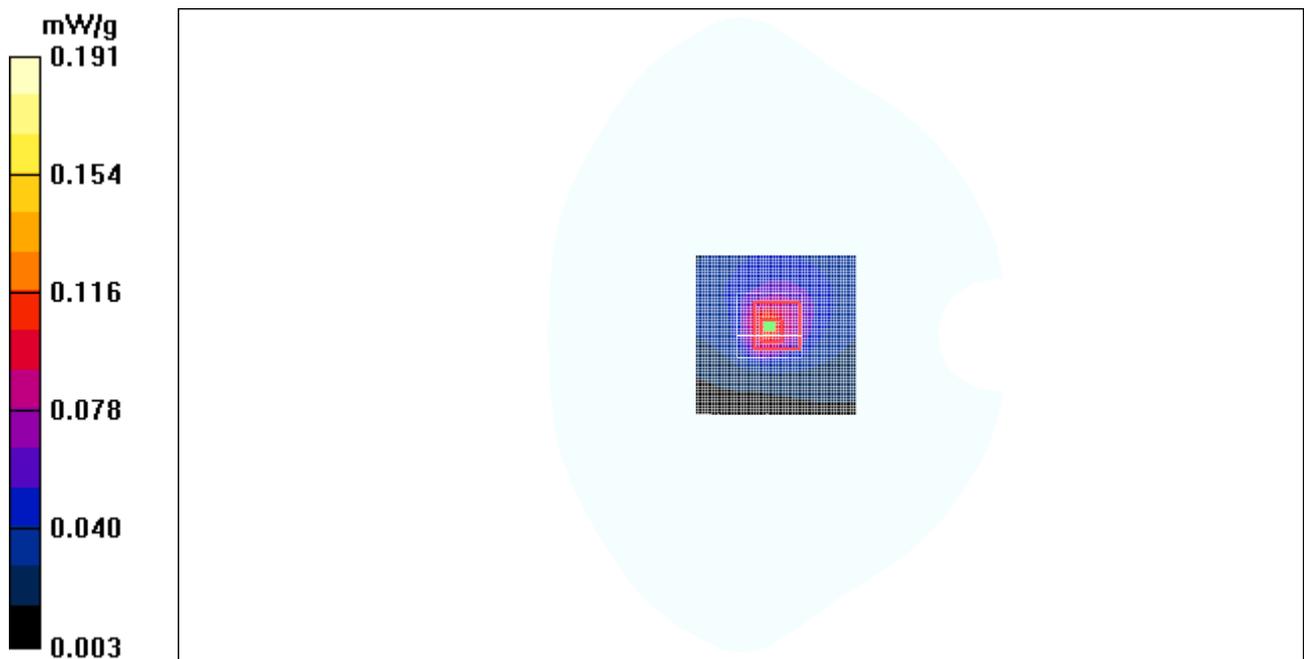


Figure 19 GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Channel 192

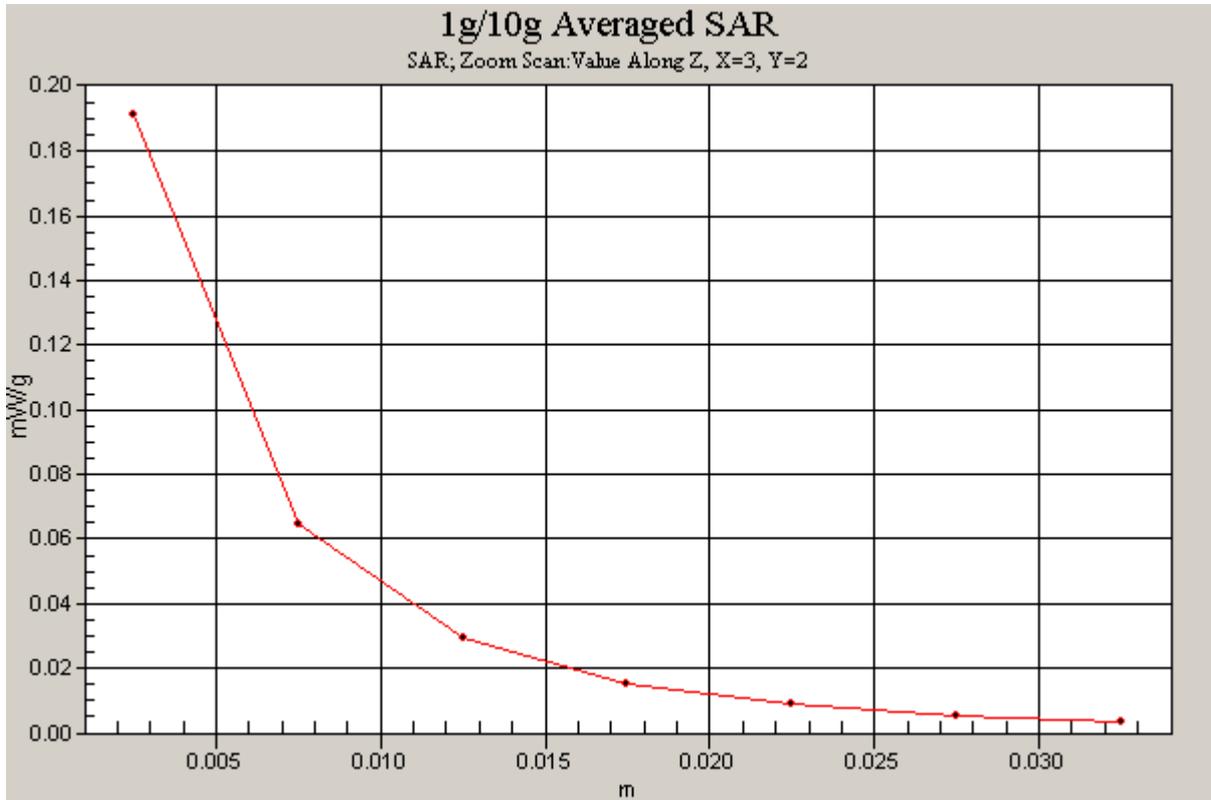


Figure 20 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Channel 192]

Date/Time: 12/22/2008 4:46:13 PM

GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Middle Frequency

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.986 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 3 Middle/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.685 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.0 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.820 W/kg

SAR(1 g) = 0.562 mW/g; SAR(10 g) = 0.392 mW/g

Maximum value of SAR (measured) = 0.670 mW/g

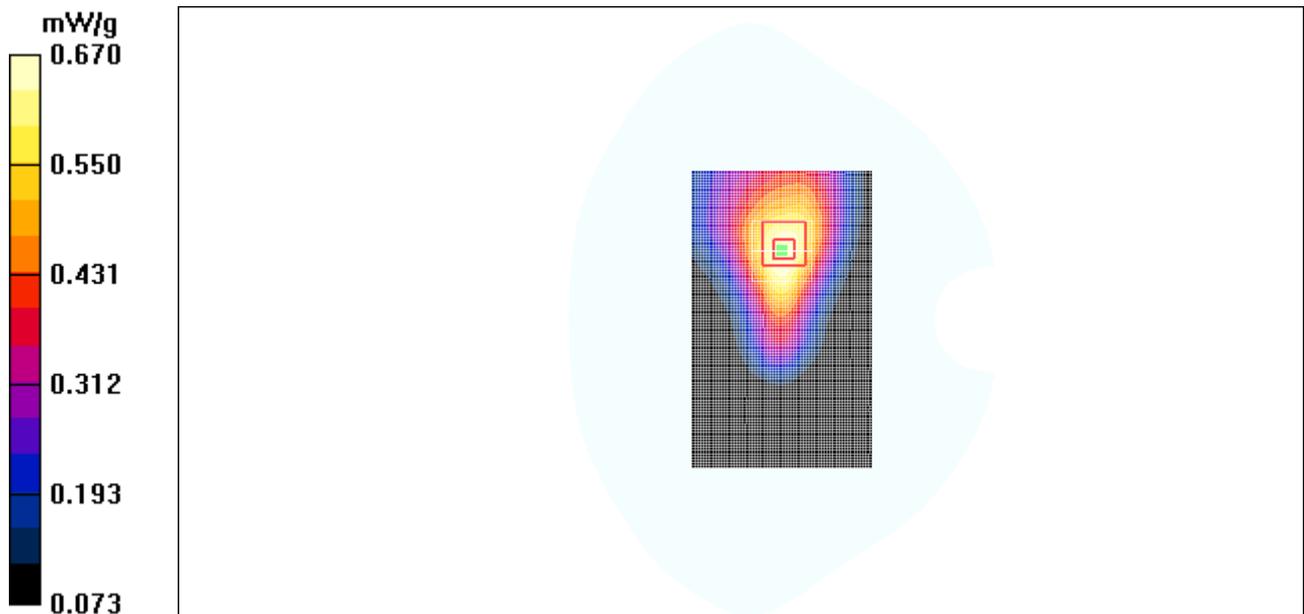


Figure 21 GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 192

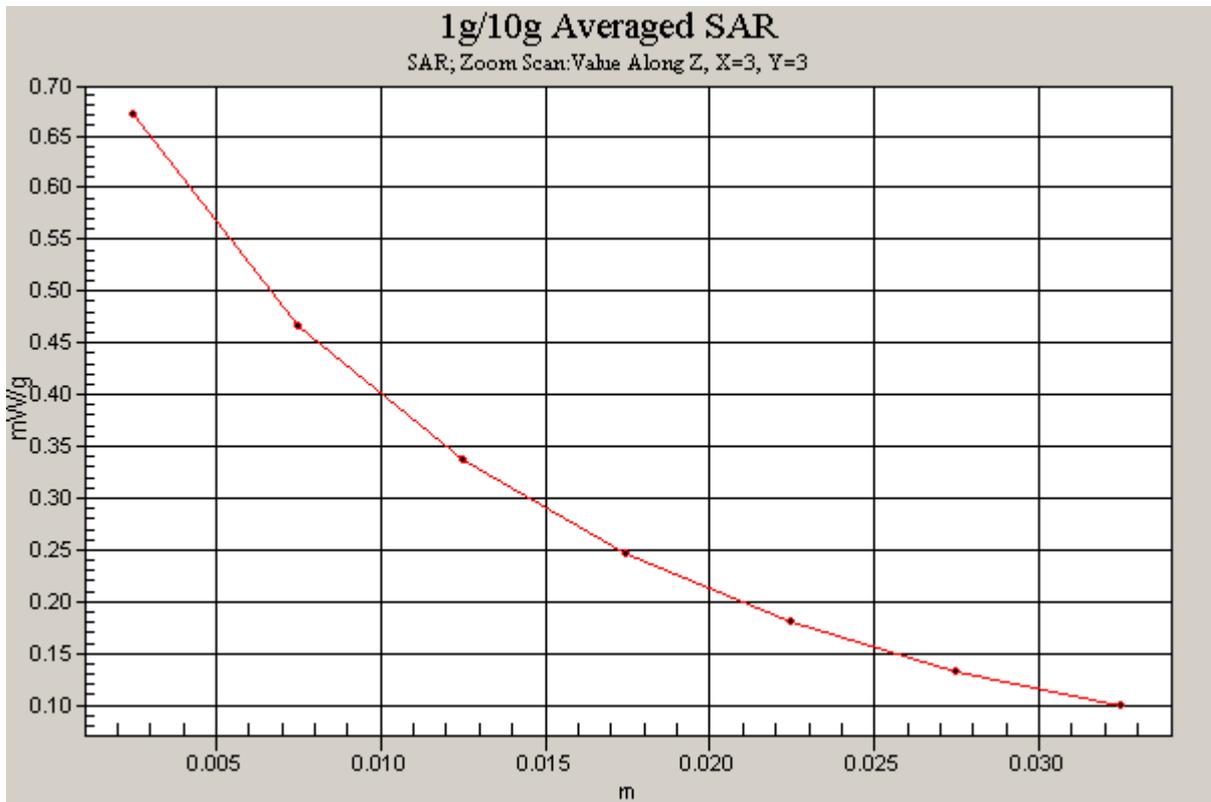


Figure 22 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 192]

Date/Time: 12/21/2008 6:59:57 PM

GSM 850 GPRS (2 timeslots in uplink) with IBM T61 Test Position 4 Middle Frequency

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.986 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Towards Phantom Middle/Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.646 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.8 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 0.802 W/kg

SAR(1 g) = 0.514 mW/g; SAR(10 g) = 0.329 mW/g

Maximum value of SAR (measured) = 0.639 mW/g

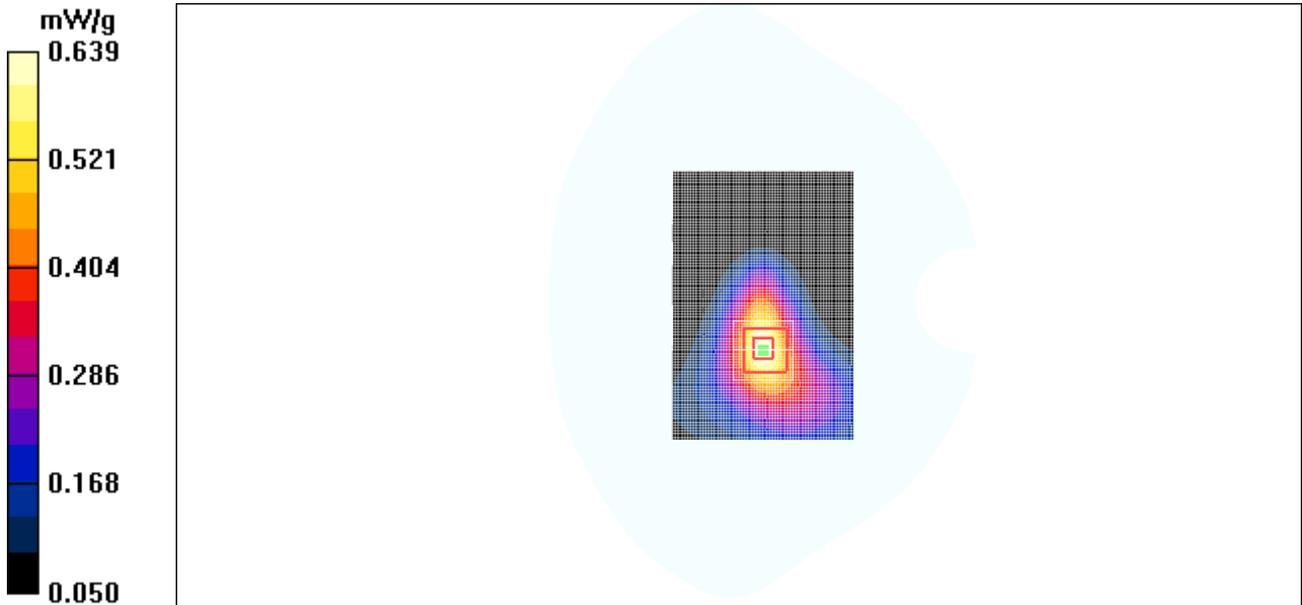


Figure 23 GSM 850 GPRS (2 timeslots in uplink) with IBM T61 Test Position 4 Channel 192

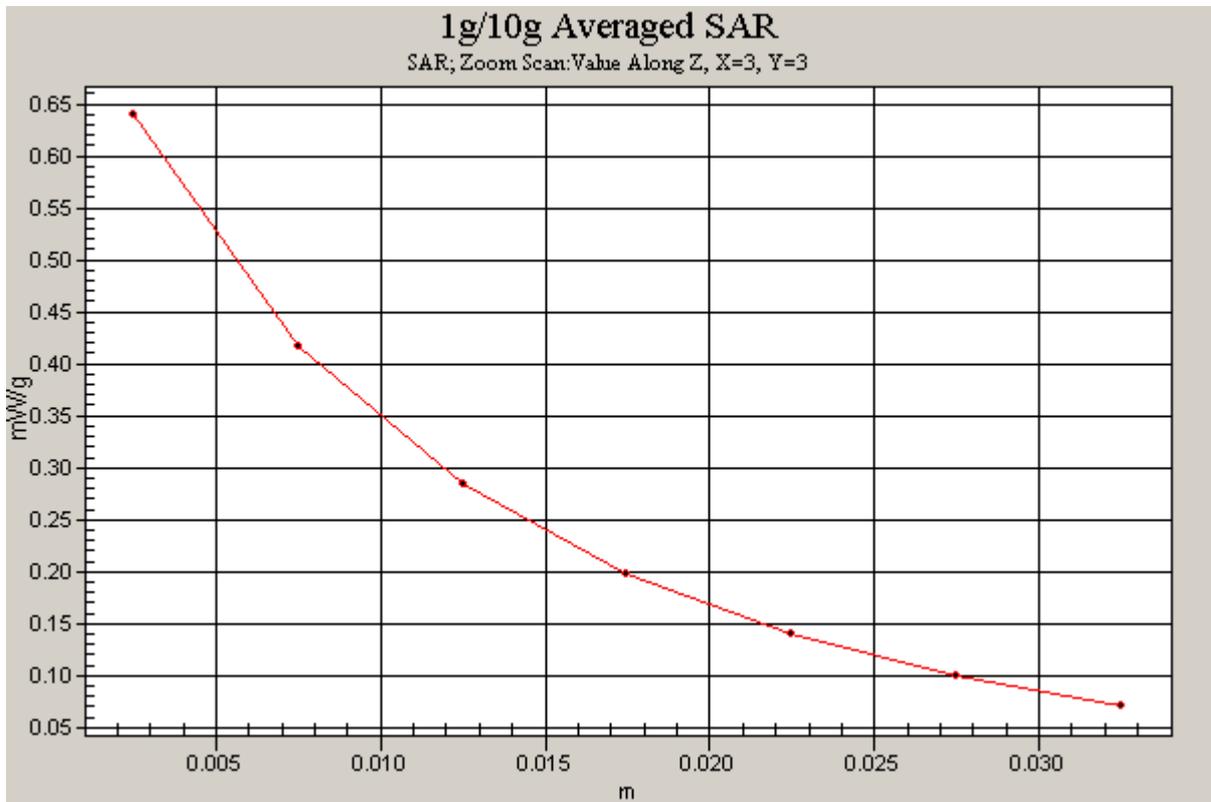


Figure 24 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with IBM T61
Test Position 4 Channel 192]

Date/Time: 12/21/2008 5:32:22 PM

GSM 850 GPRS (2 timeslots in uplink) with IBM T61 Test Position 5 Middle Frequency

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.986 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 5 Middle/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.694 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.9 V/m; Power Drift = -0.186 dB

Peak SAR (extrapolated) = 0.870 W/kg

SAR(1 g) = 0.560 mW/g; SAR(10 g) = 0.356 mW/g

Maximum value of SAR (measured) = 0.692 mW/g

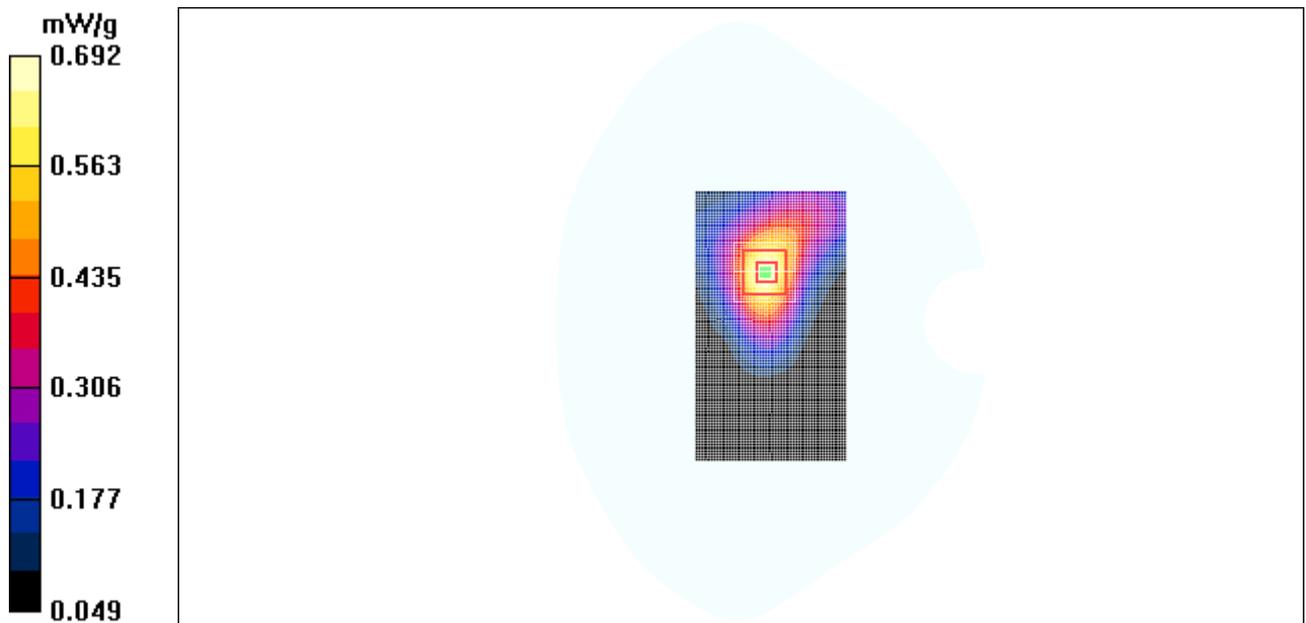


Figure 25 GSM 850 GPRS (2 timeslots in uplink) with IBM T61 Test Position 5 Channel 192

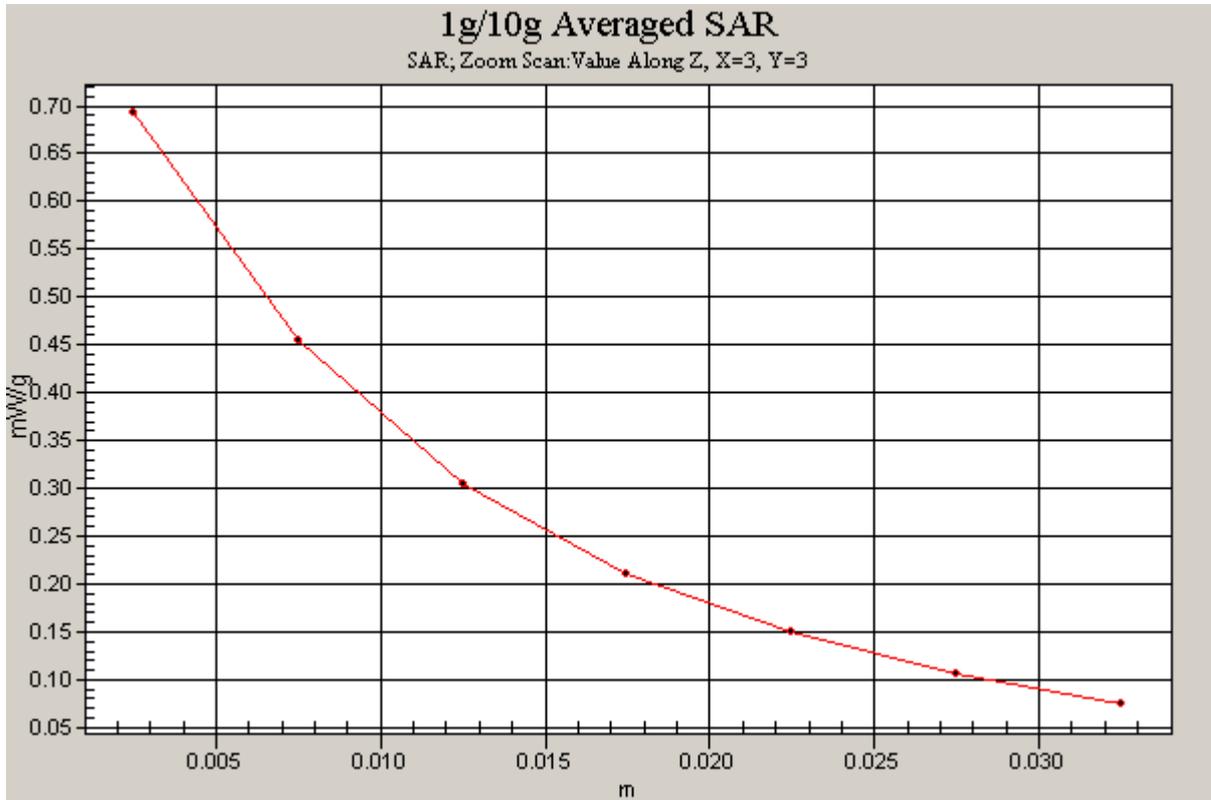


Figure 26 Z-Scan at power reference point (GSM 850 GPRS (2 timeslots in uplink) with IBM T61
Test Position 5 Channel 192

Date/Time: 12/22/2008 8:17:27 PM

GSM 850 EGPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Communication System: GSM850 + EGPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.986 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 1 Middle/Area Scan (41x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.428 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.0 V/m; Power Drift = 0.140 dB

Peak SAR (extrapolated) = 0.531 W/kg

SAR(1 g) = 0.350 mW/g; SAR(10 g) = 0.226 mW/g

Maximum value of SAR (measured) = 0.426 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.0 V/m; Power Drift = 0.140 dB

Peak SAR (extrapolated) = 0.436 W/kg

SAR(1 g) = 0.261 mW/g; SAR(10 g) = 0.154 mW/g

Maximum value of SAR (measured) = 0.355 mW/g

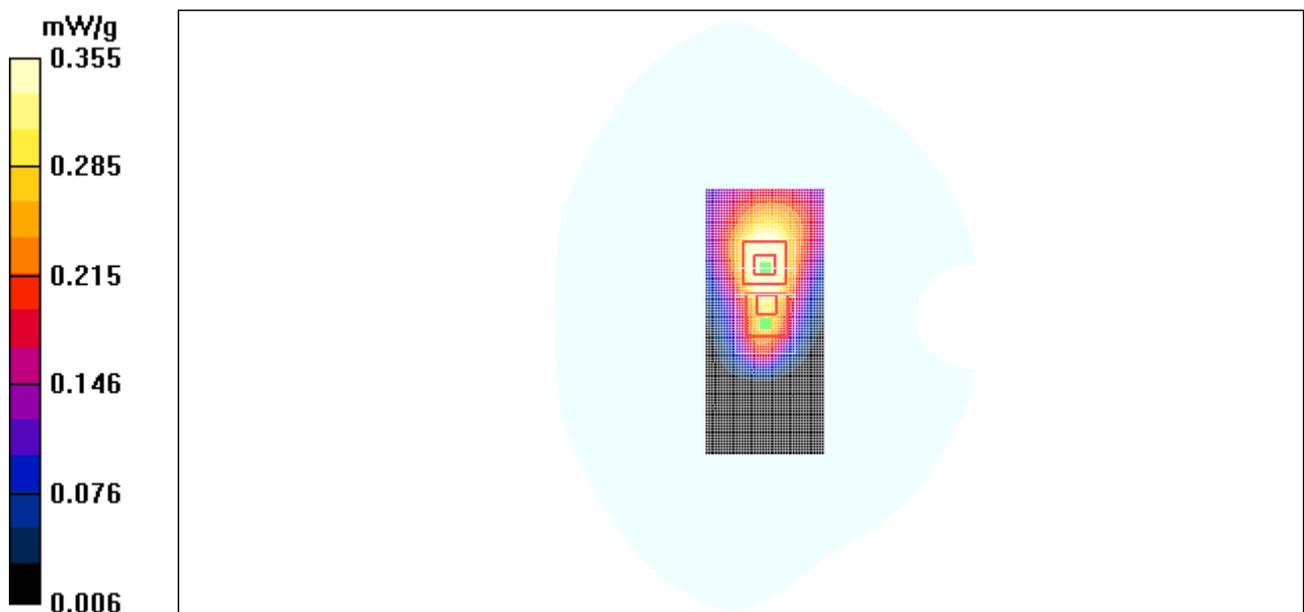


Figure 27 GSM 850 EGPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 192

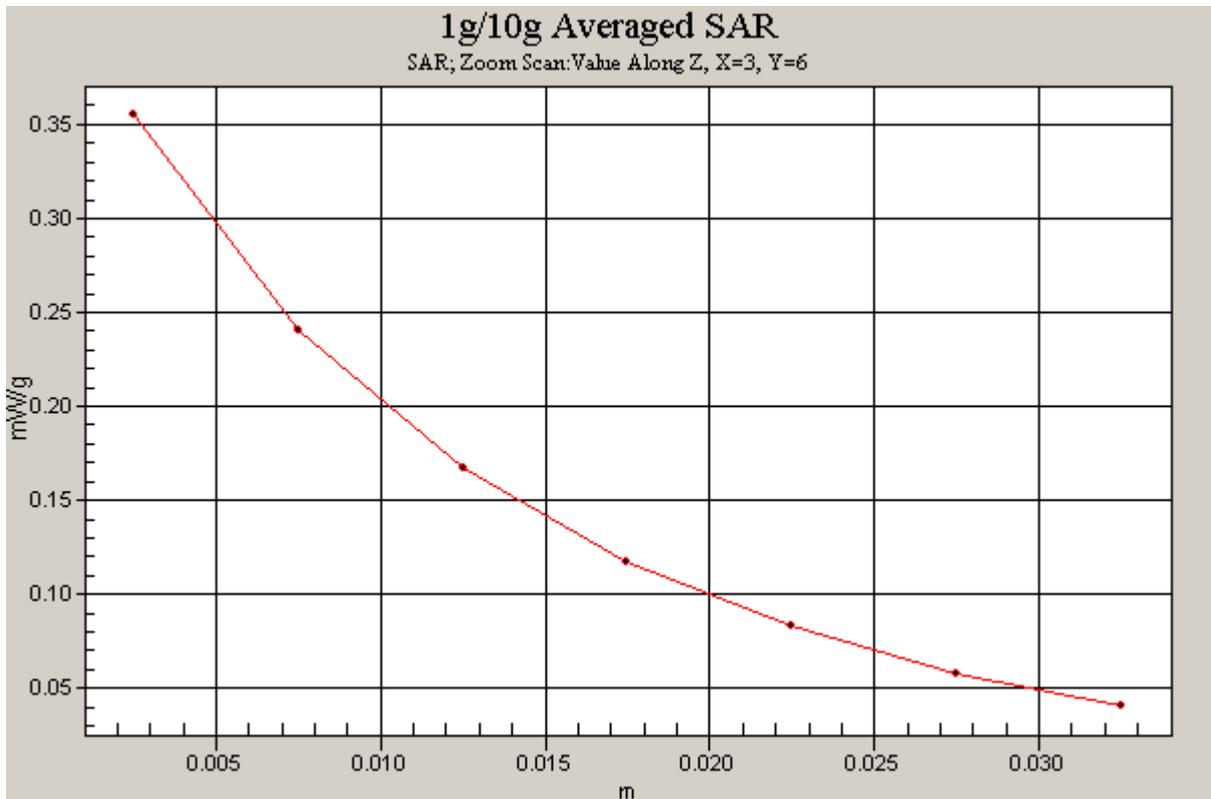
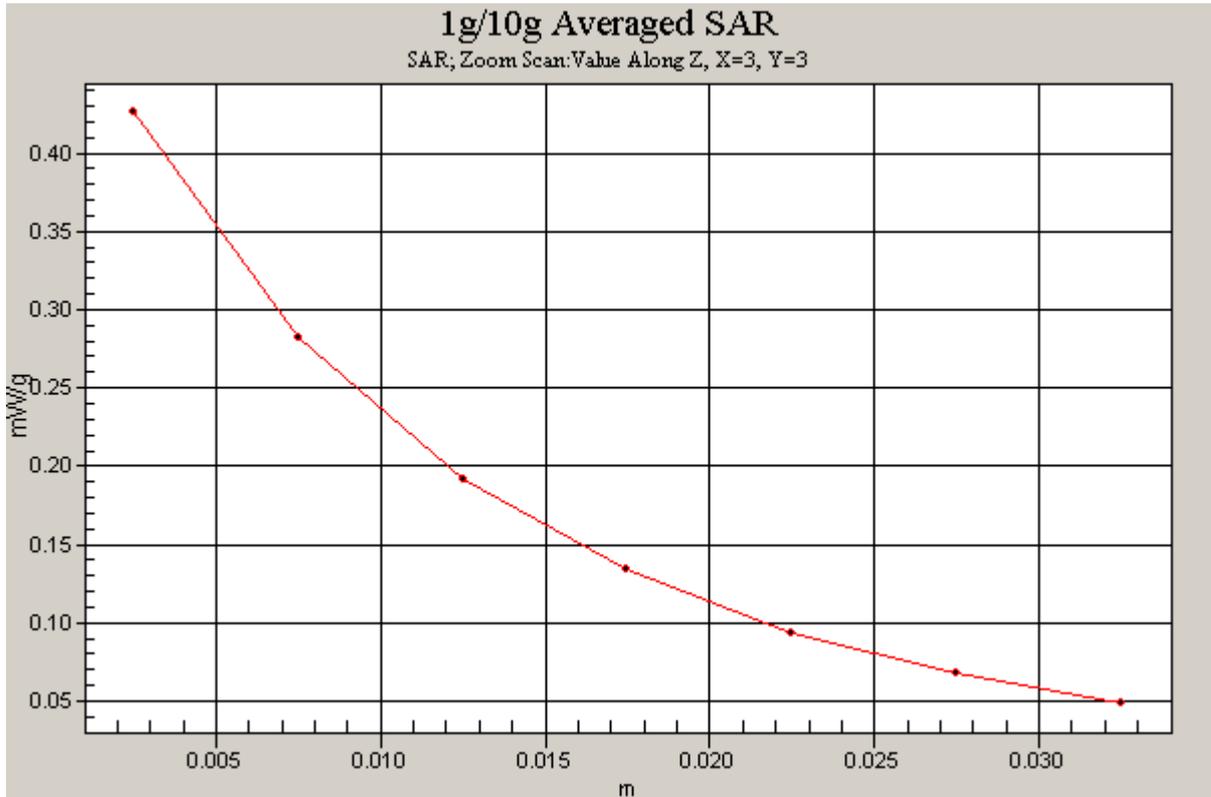


Figure 28 Z-Scan at power reference point (GSM 850 EGPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 192

Date/Time: 12/22/2008 9:35:32 PM

GSM 1900 GPRS (4 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Communication System: GSM 1900+GPRS(4Up); Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 1 Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.02 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.2 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.697 mW/g; SAR(10 g) = 0.368 mW/g

Maximum value of SAR (measured) = 0.913 mW/g

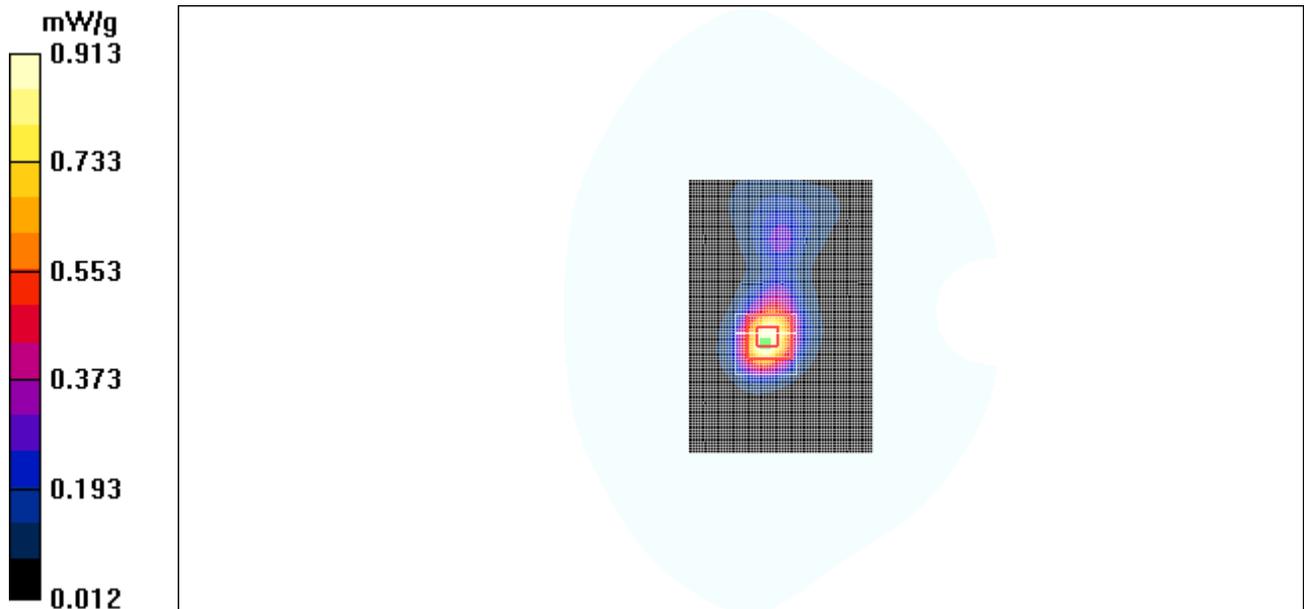


Figure 29 GSM 1900 GPRS (4 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 661

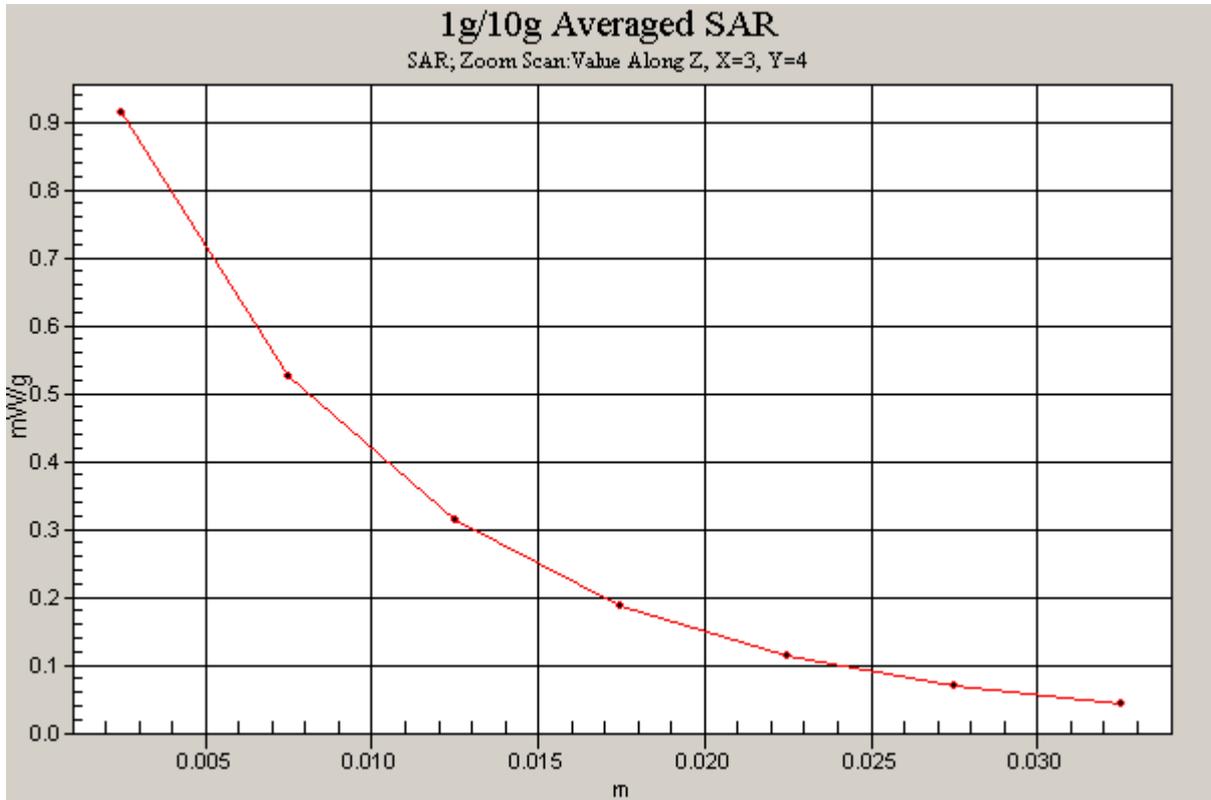


Figure 30 Z-Scan at power reference point [GSM 1900 GPRS (4 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 661]

Date/Time: 12/22/2008 10:13:51 PM

GSM 1900 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1 High Frequency

Communication System: GSM 1900+GPRS(3Up); Frequency: 1909.8 MHz; Duty Cycle: 1:2.67

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 1 High/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.23 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.3 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.875 mW/g; SAR(10 g) = 0.459 mW/g

Maximum value of SAR (measured) = 1.14 mW/g

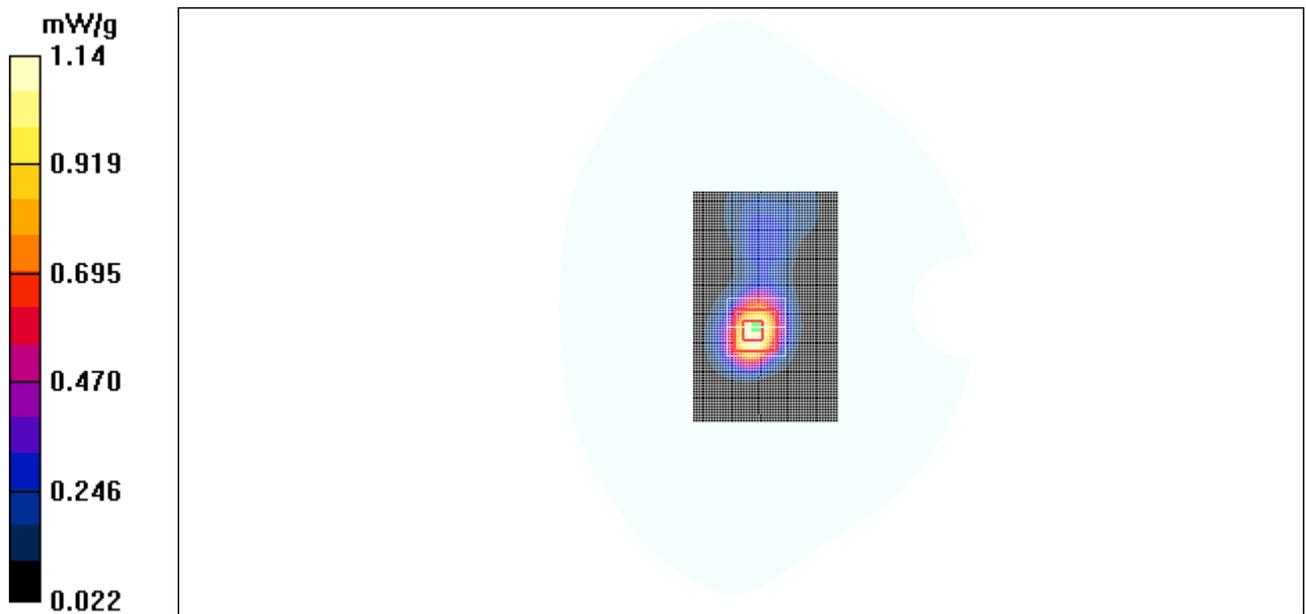


Figure 31 GSM 1900 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 810

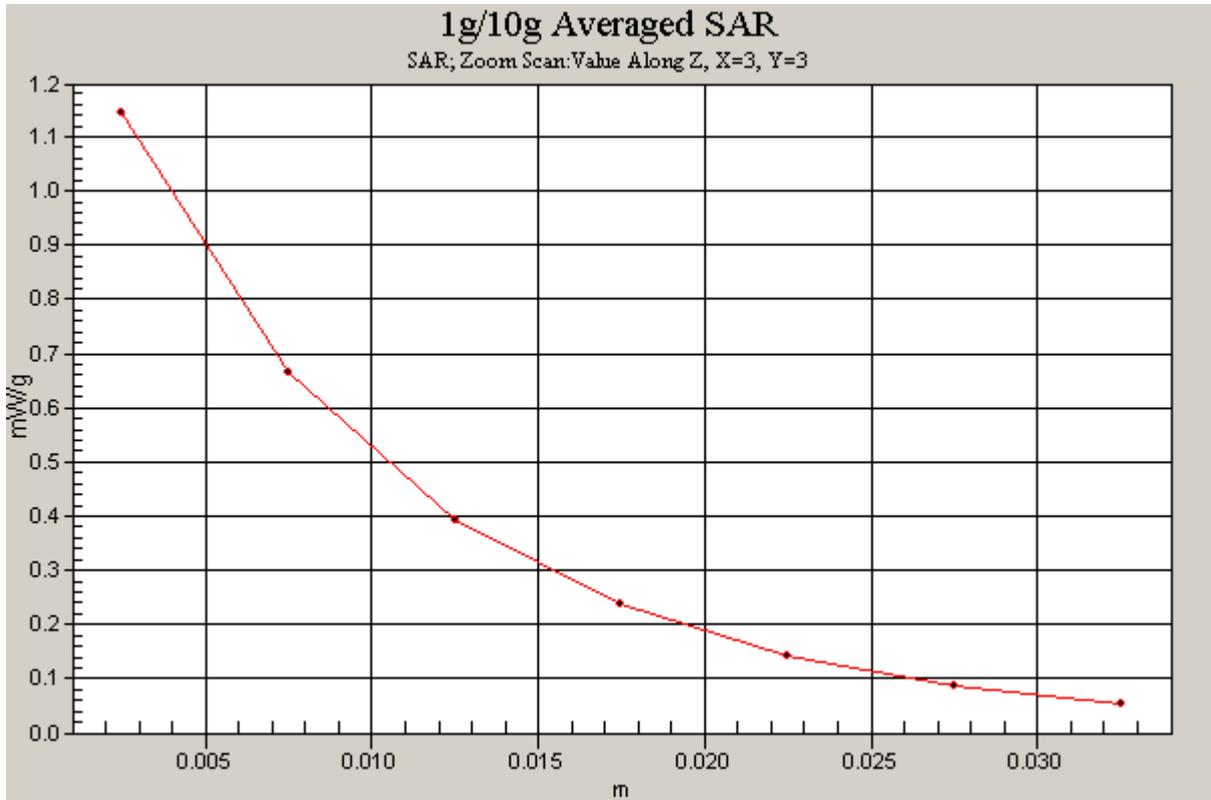


Figure 32 Z-Scan at power reference point (GSM 1900 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 810

Date/Time: 12/22/2008 9:55:12 PM

GSM 1900 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Communication System: GSM 1900+GPRS(3Up); Frequency: 1880 MHz; Duty Cycle: 1:2.67

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 1 Middle/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.18 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.8 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.840 mW/g; SAR(10 g) = 0.440 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

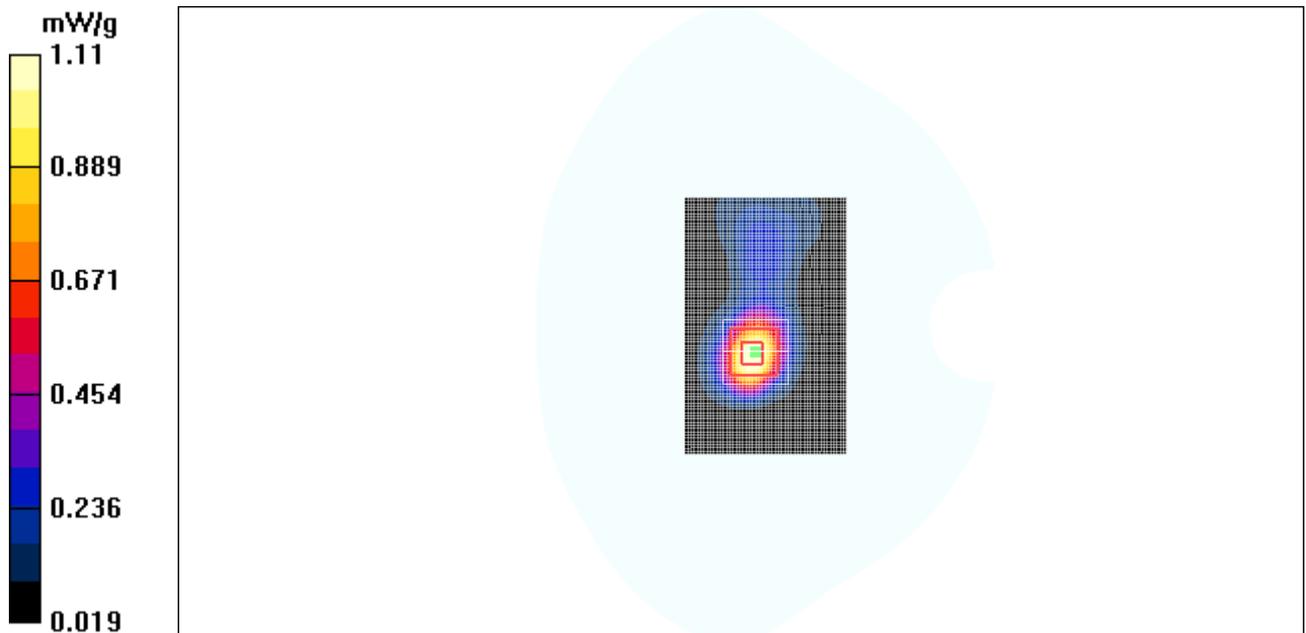


Figure 33 GSM 1900 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 661

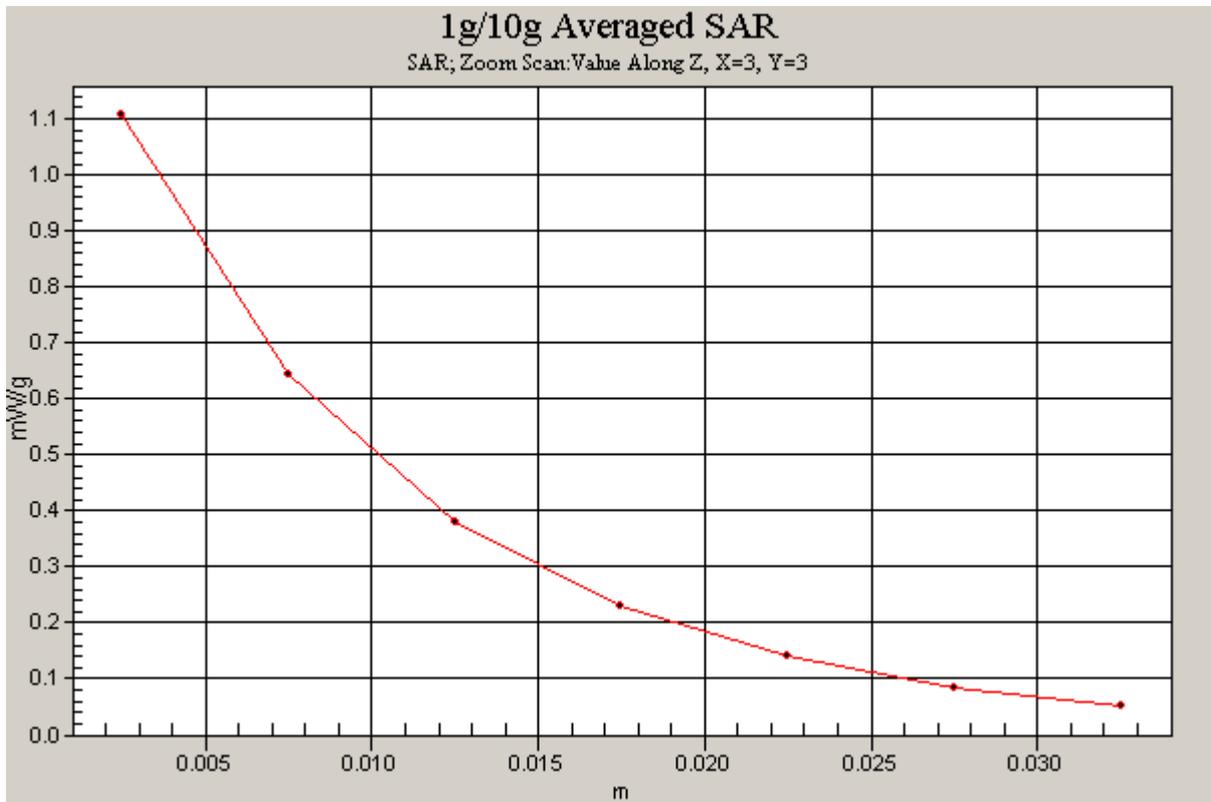


Figure 34 Z-Scan at power reference point (GSM 1900 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 661

Date/Time: 12/22/2008 10:31:41 PM

GSM 1900 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Low Frequency

Communication System: GSM 1900+GPRS(3Up); Frequency: 1850.2 MHz; Duty Cycle: 1:2.67

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 1 Low/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.19 mW/g

Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.8 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.847 mW/g; SAR(10 g) = 0.446 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

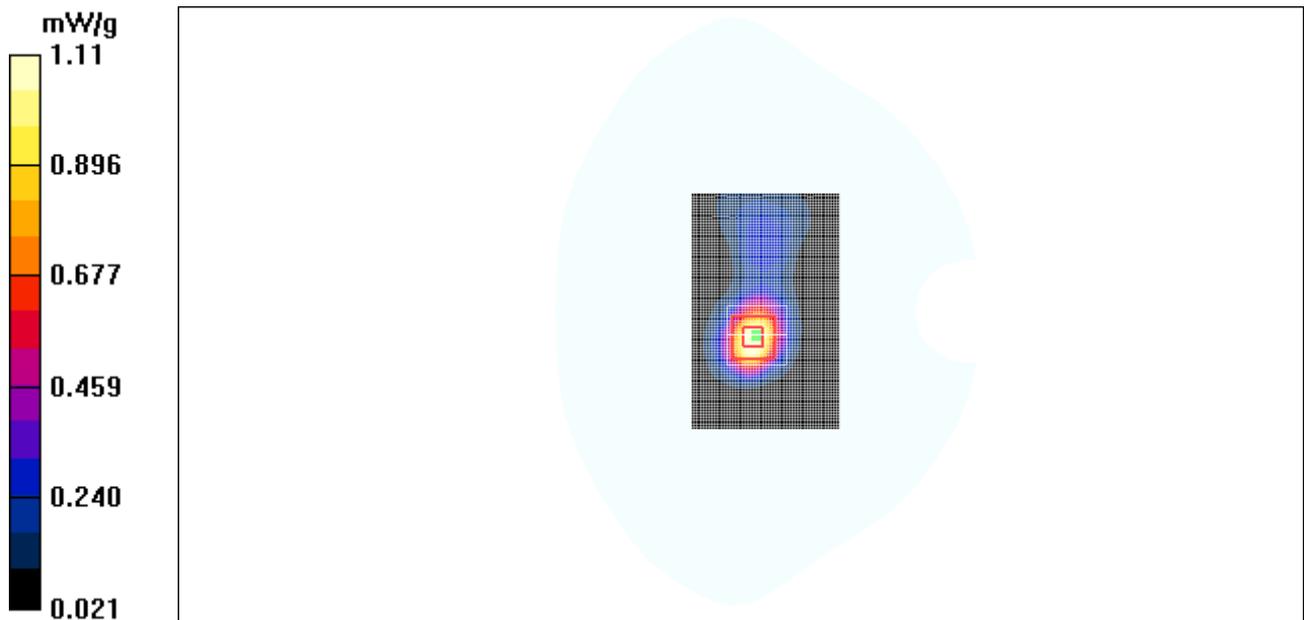


Figure 35 GSM 1900 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 512

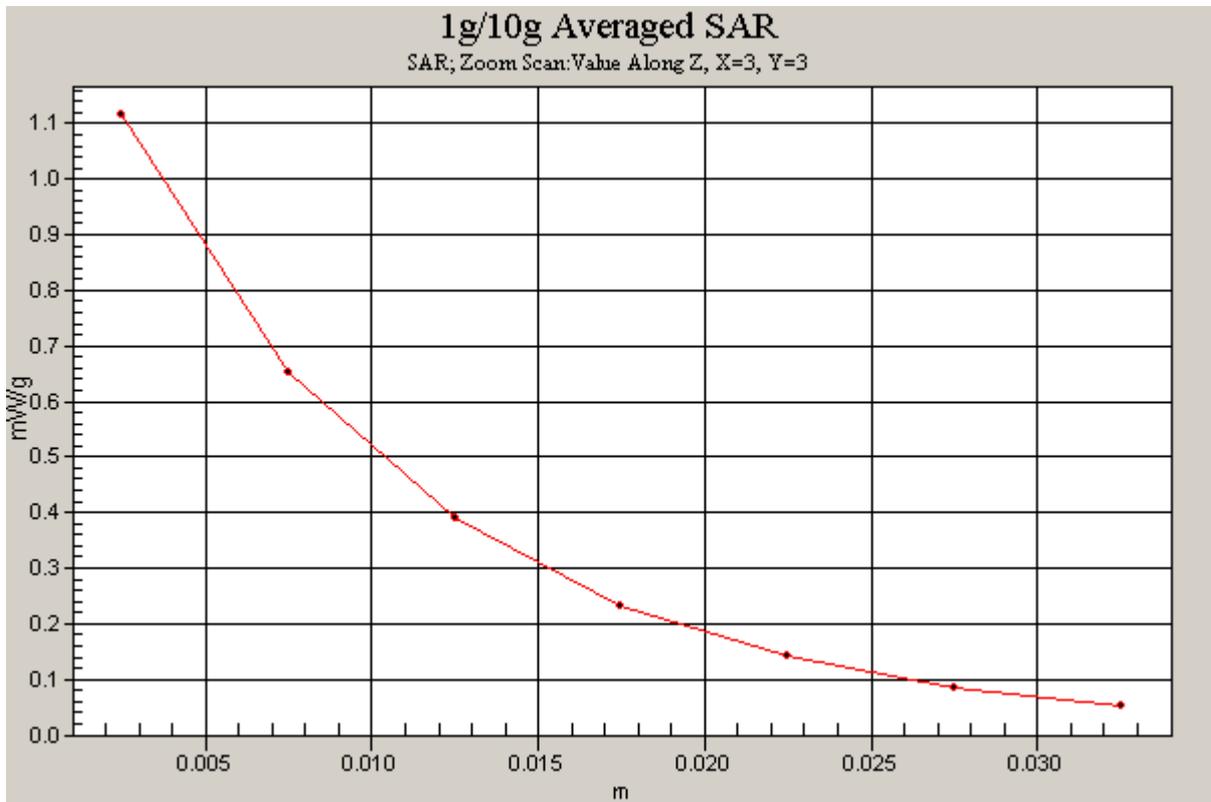


Figure 36 Z-Scan at power reference point (GSM 1900 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 512

GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 High Frequency

Communication System: GSM 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 1 High/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.36 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.2 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.956 mW/g; SAR(10 g) = 0.501 mW/g

Maximum value of SAR (measured) = 1.24 mW/g

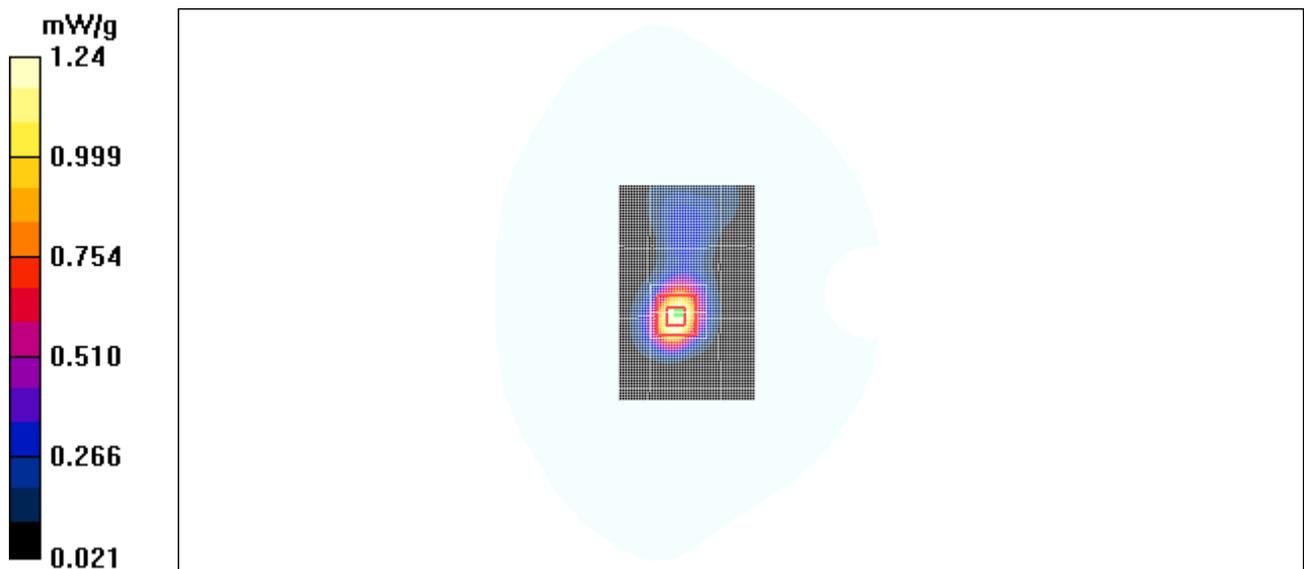


Figure 37 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 810

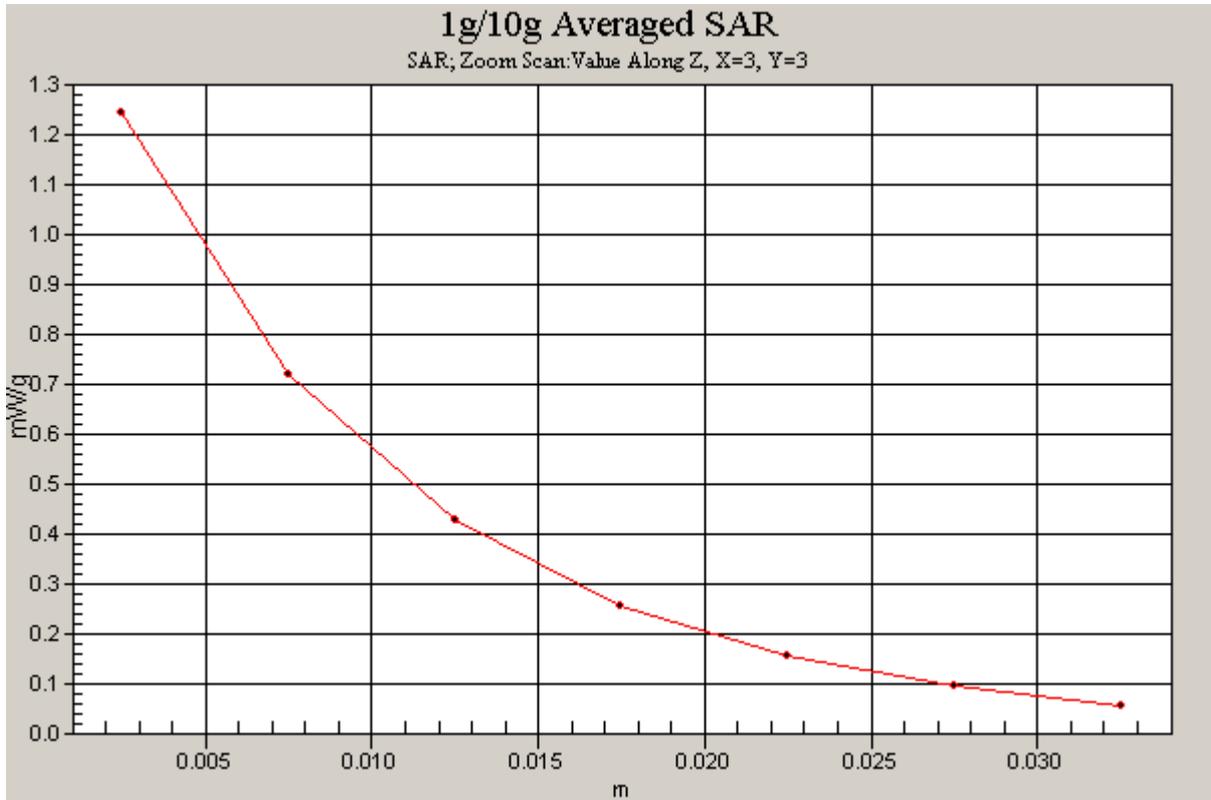


Figure 38 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 810]

Date/Time: 12/22/2008 10:51:54 PM

GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Communication System: GSM 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 1 Middle/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.27 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.5 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.902 mW/g; SAR(10 g) = 0.475 mW/g

Maximum value of SAR (measured) = 1.19 mW/g

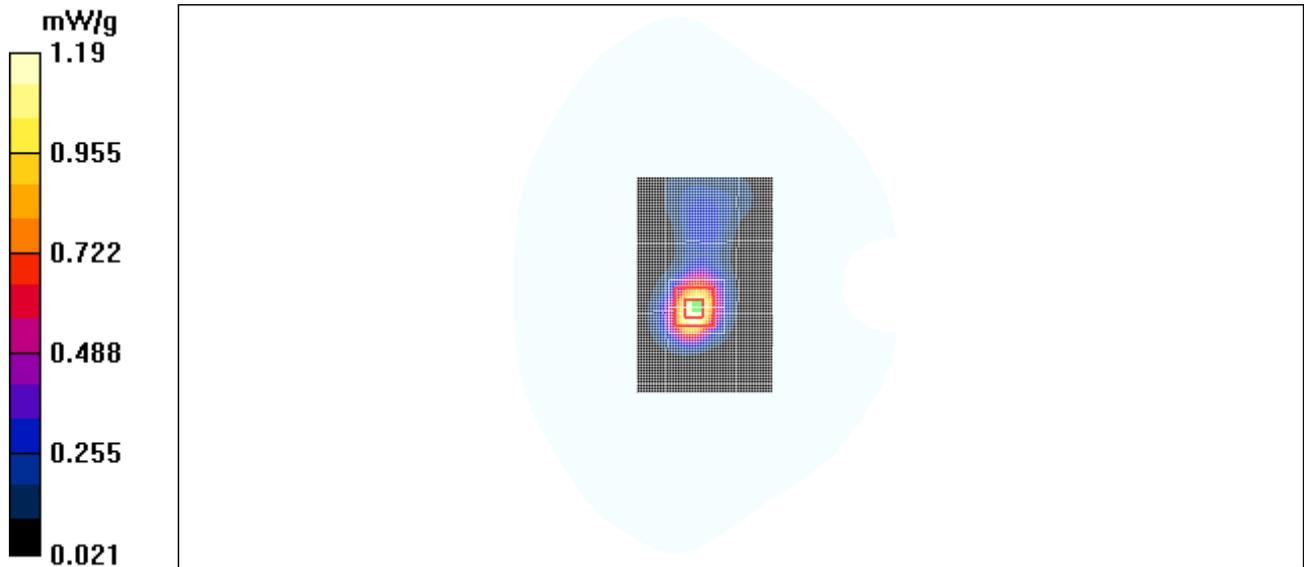


Figure 39 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 661

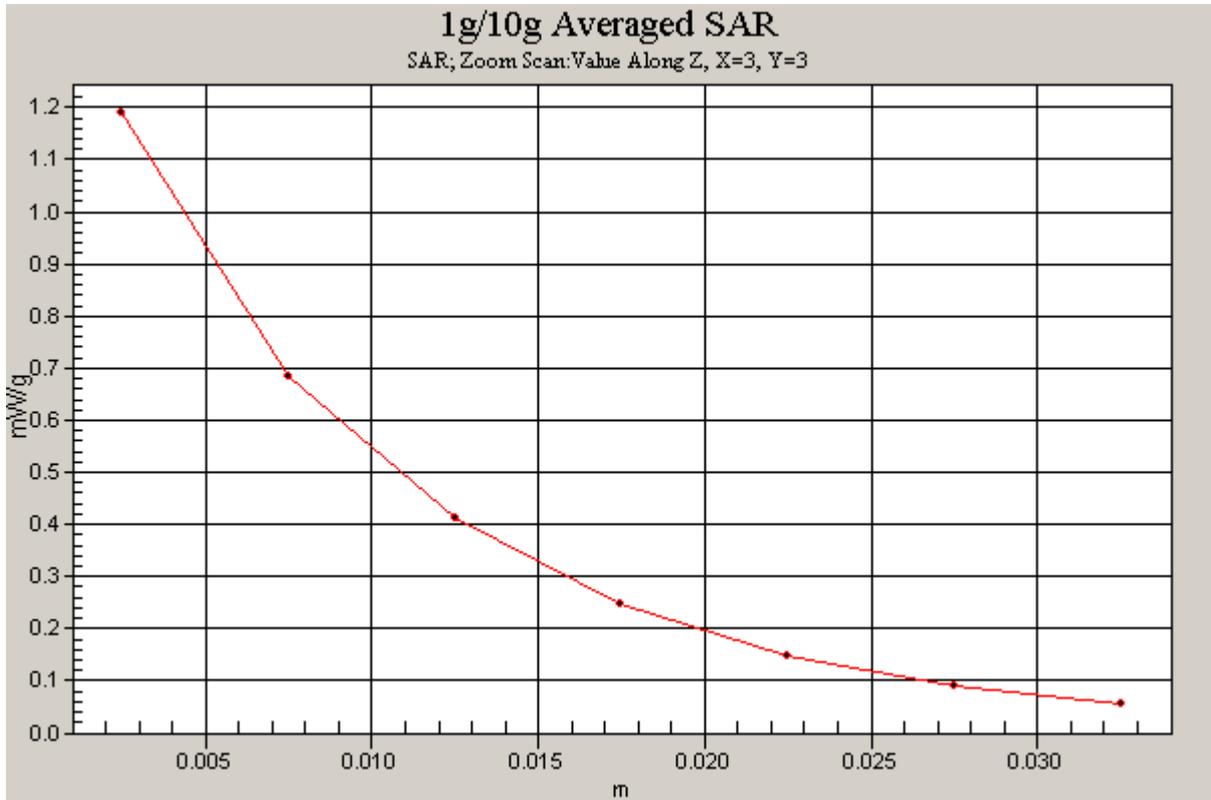


Figure 40 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 661]

Date/Time: 12/22/2008 11:10:44 PM

GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Low Frequency

Communication System: GSM 1900+GPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 1 Low/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.27 mW/g

Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.5 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.905 mW/g; SAR(10 g) = 0.476 mW/g

Maximum value of SAR (measured) = 1.19 mW/g

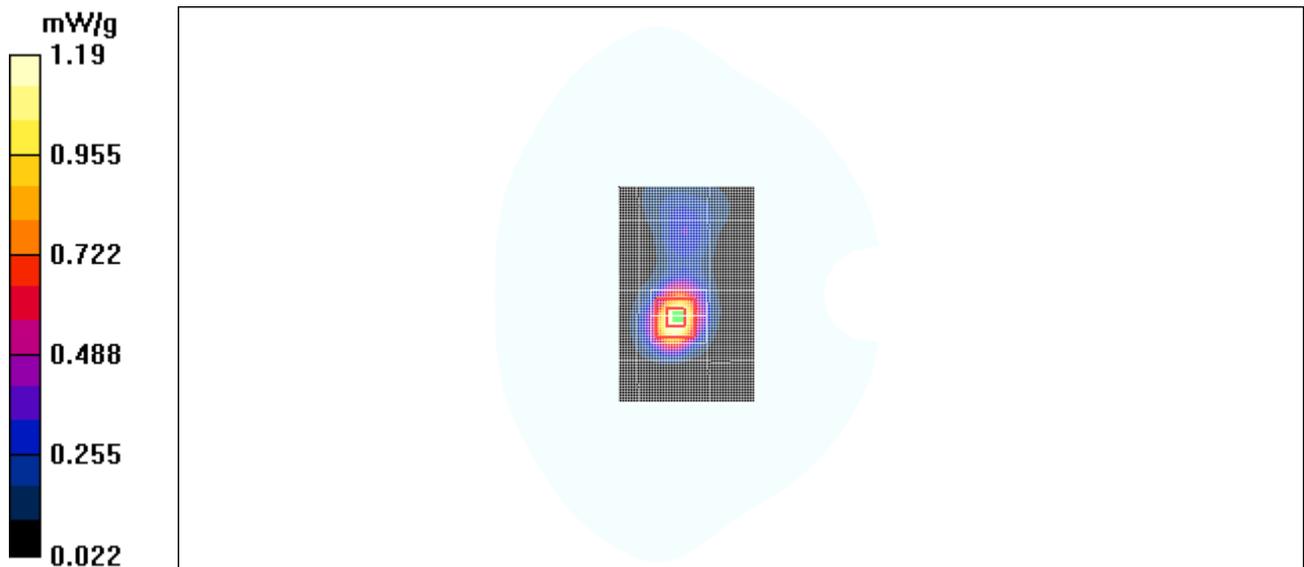


Figure 41 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 512

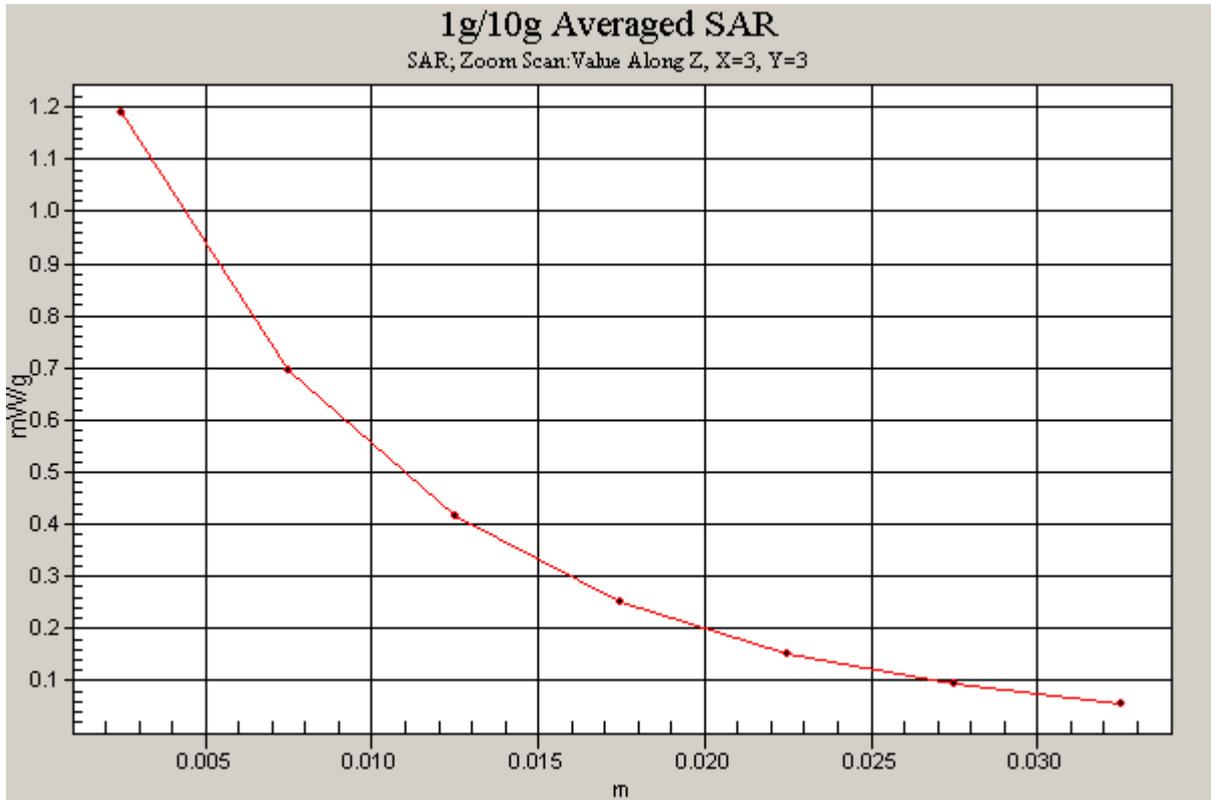


Figure 42 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 512]

Date/Time: 12/22/2008 11:10:44 PM

GSM 1900 GPRS (1 timeslot in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Communication System: GSM 1900+GPRS(1Up); Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 1 Middle/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.000 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.2 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.721 mW/g; SAR(10 g) = 0.380 mW/g

Maximum value of SAR (measured) = 0.944 mW/g

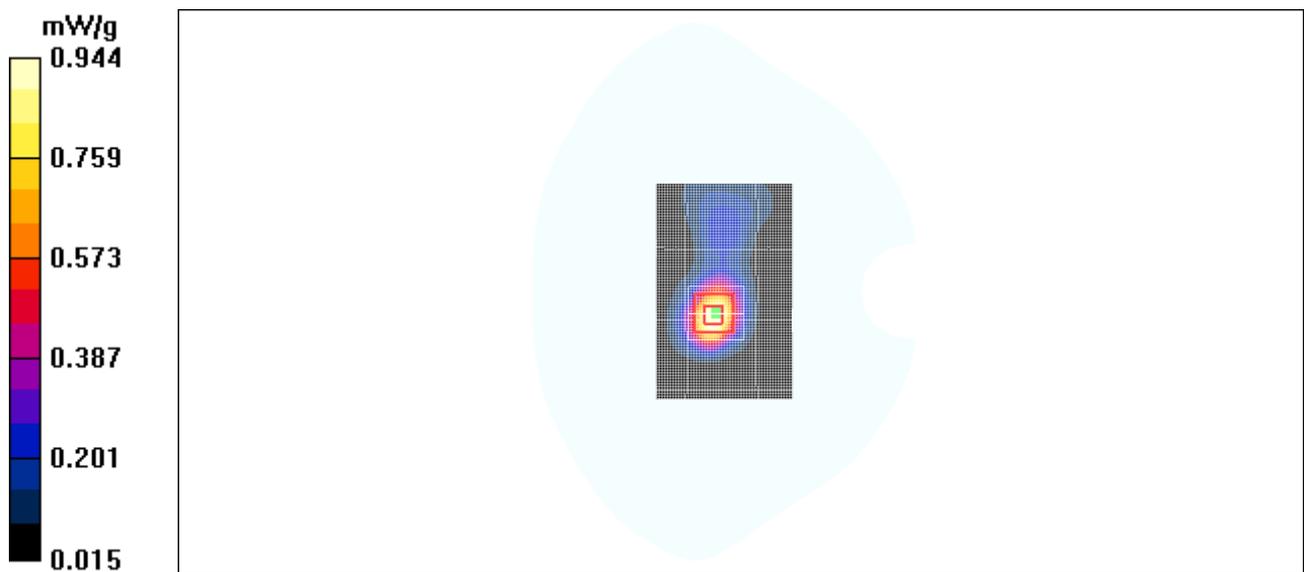


Figure 43 GSM 1900 GPRS (1 timeslot in uplink) with BenQ Joybook R55V Test Position 1 Channel 661

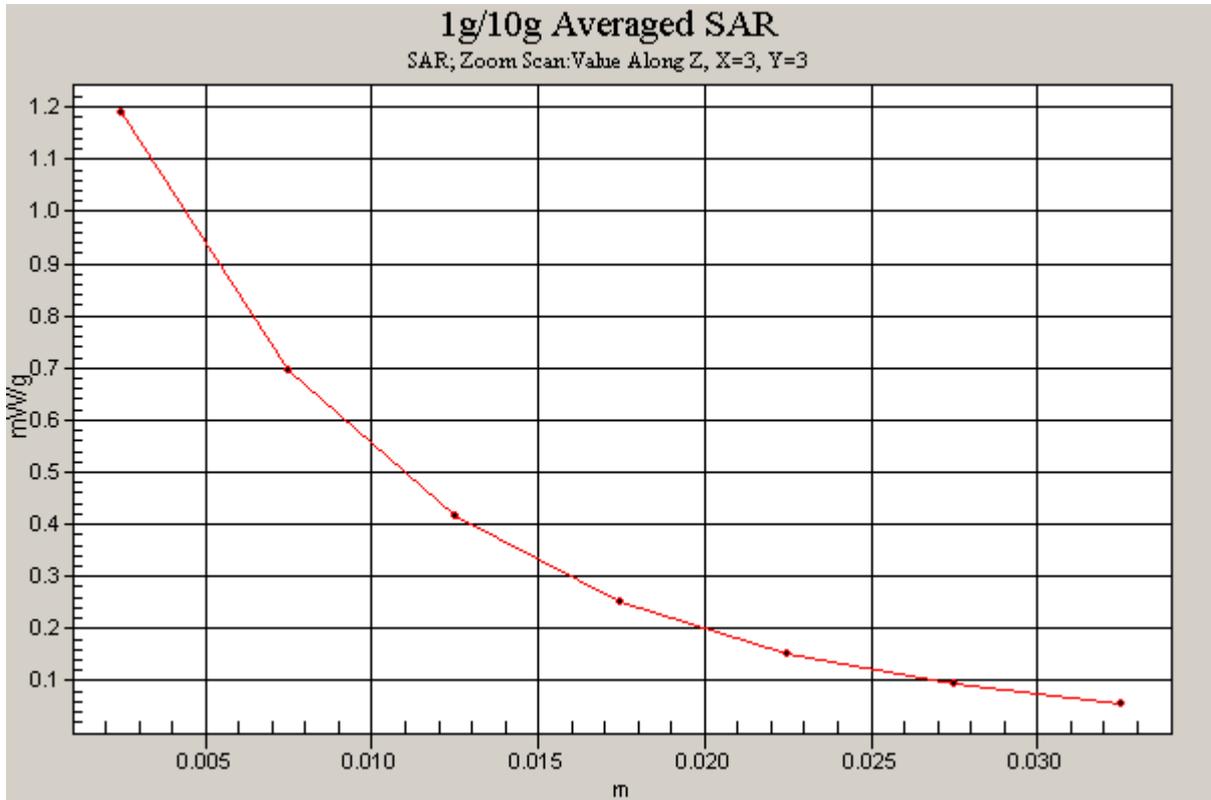


Figure 44 Z-Scan at power reference point (GSM 1900 GPRS (1 timeslot in uplink) with BenQ Joybook R55V Test Position 1Channel 661

Date/Time: 12/23/2008 12:35:58 AM

GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Middle Frequency

Communication System: GSM 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 2 Middle/Area Scan (51x51x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.327 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.579 W/kg

SAR(1 g) = 0.233 mW/g; SAR(10 g) = 0.113 mW/g

Maximum value of SAR (measured) = 0.355 mW/g

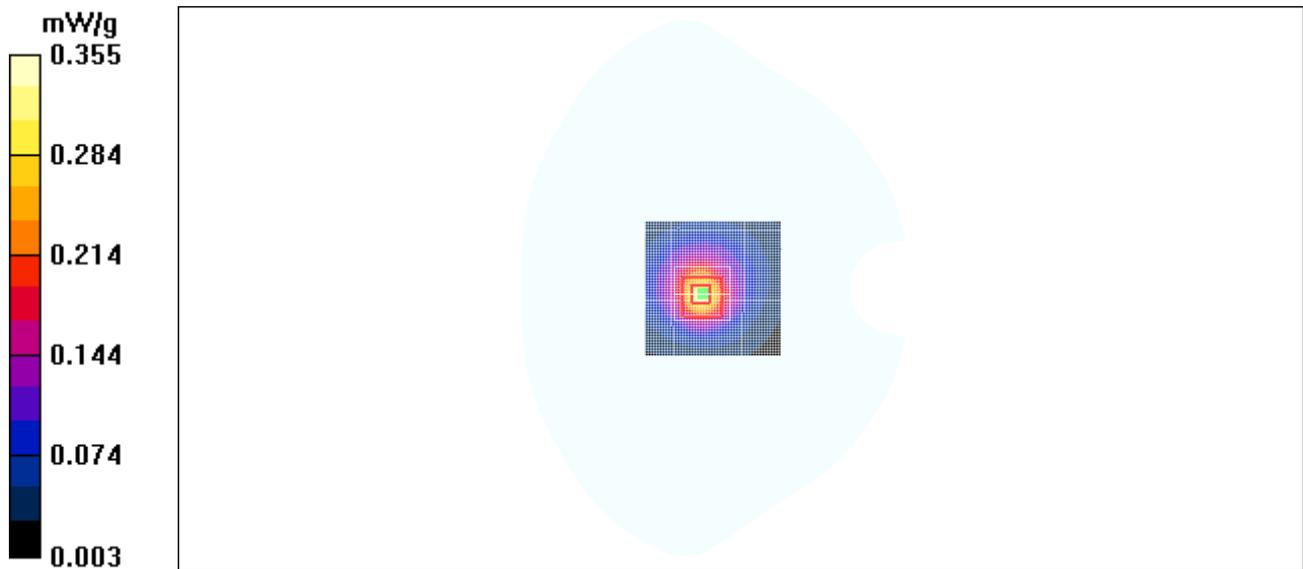


Figure 45 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Channel 661

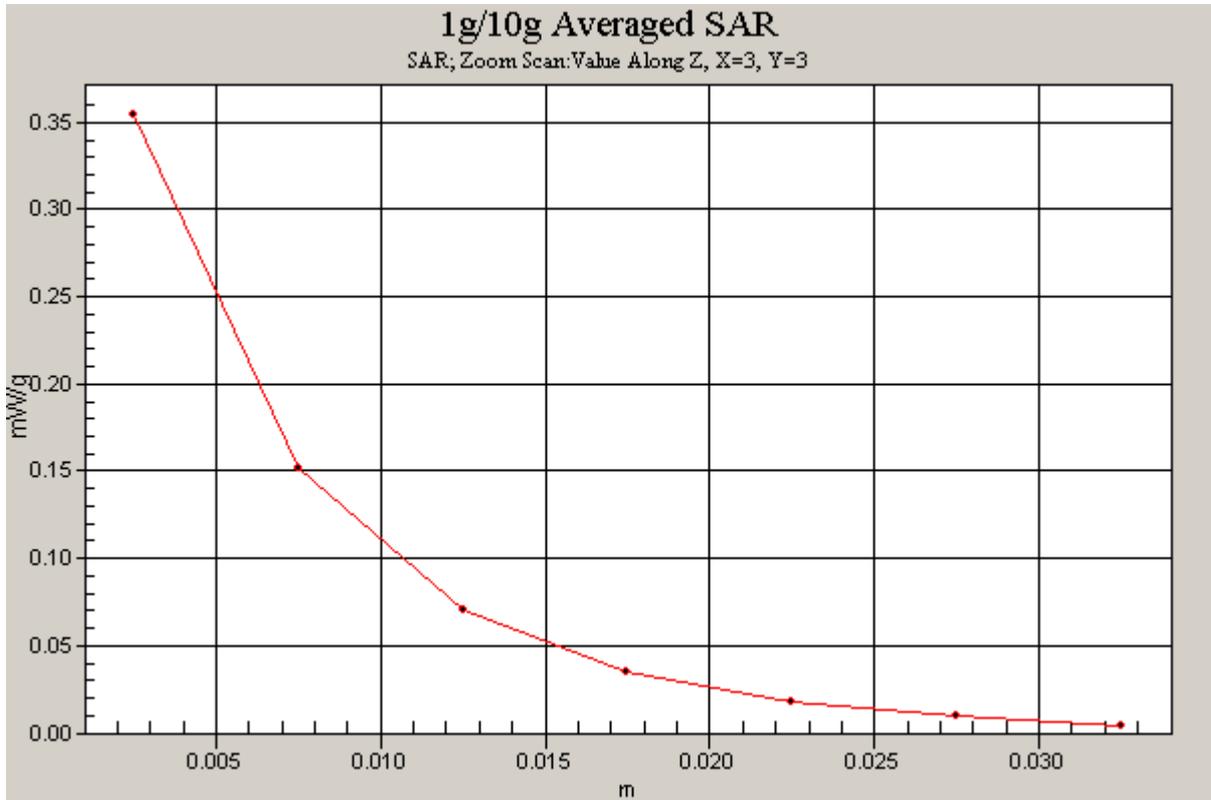


Figure 46 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Channel 661]

Date/Time: 12/20/2008 3:06:40 AM

GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 High Frequency

Communication System: GSM 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 3 High/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.14 mW/g

Test Position 3 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.0 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.807 mW/g; SAR(10 g) = 0.412 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

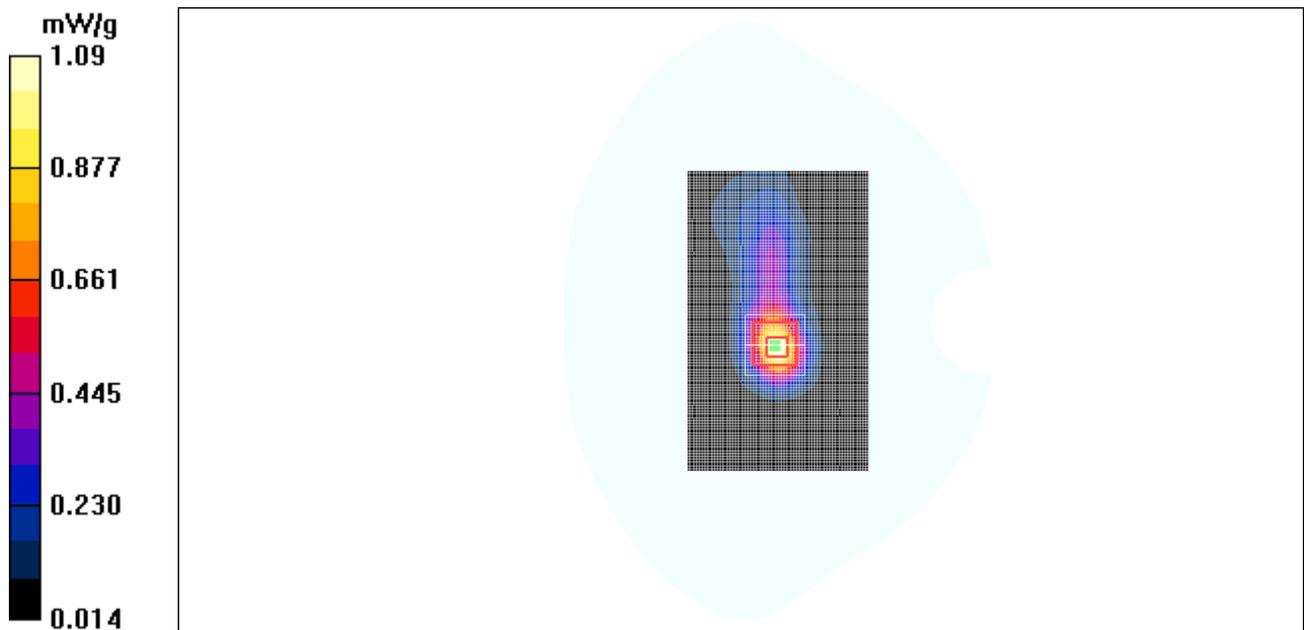


Figure 47 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 810

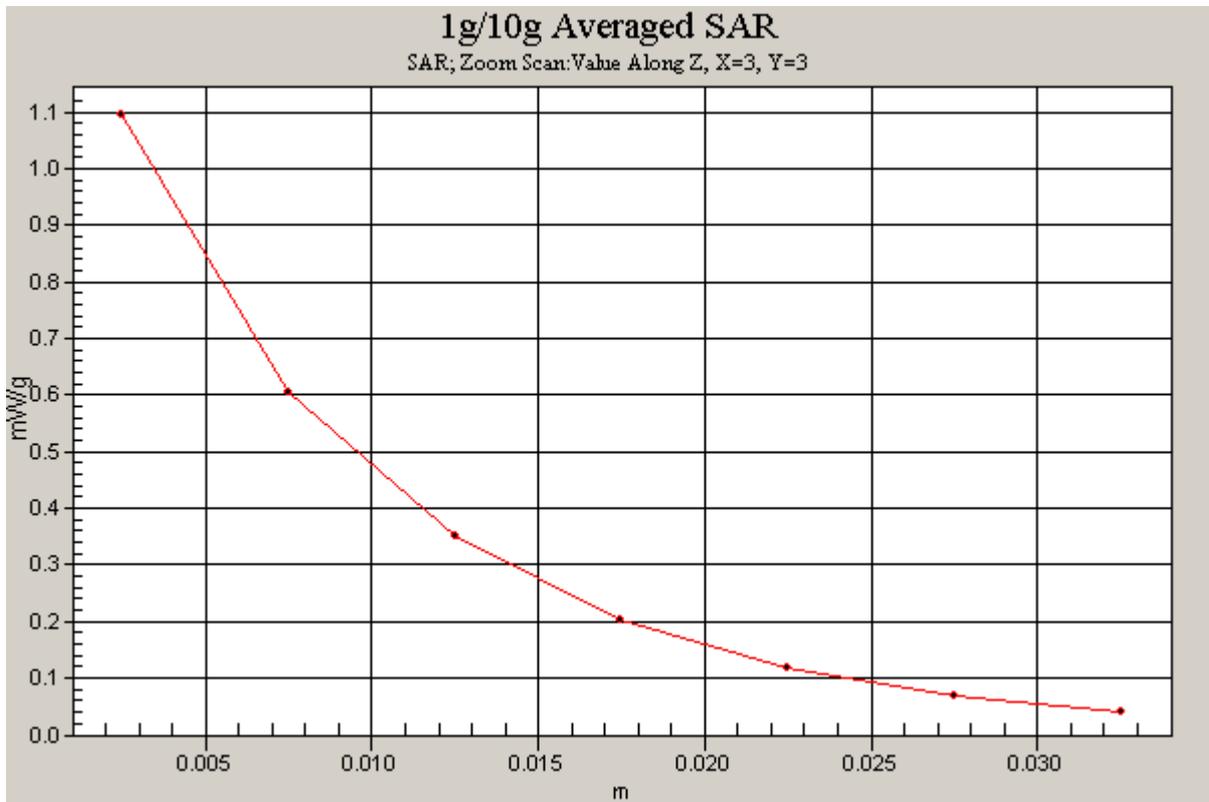


Figure 48 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 810]

Date/Time: 12/20/2008 2:44:55 AM

GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Middle Frequency

Communication System: GSM 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 3 Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.16 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.2 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.821 mW/g; SAR(10 g) = 0.420 mW/g

Maximum value of SAR (measured) = 1.10 mW/g

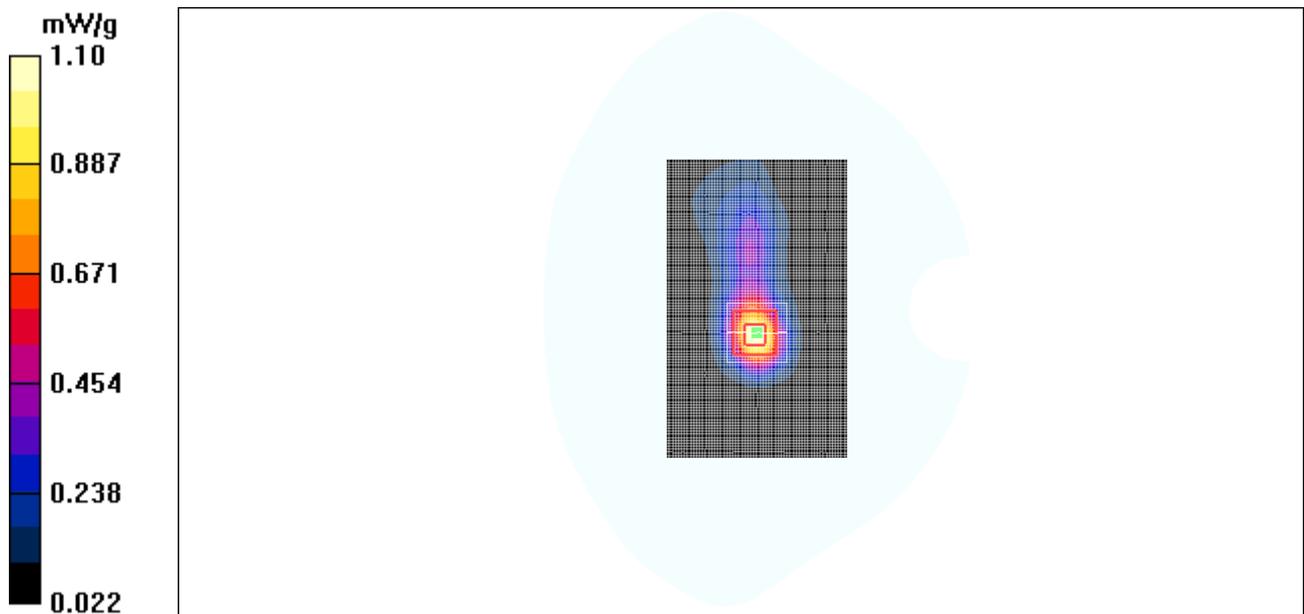


Figure 49 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 661

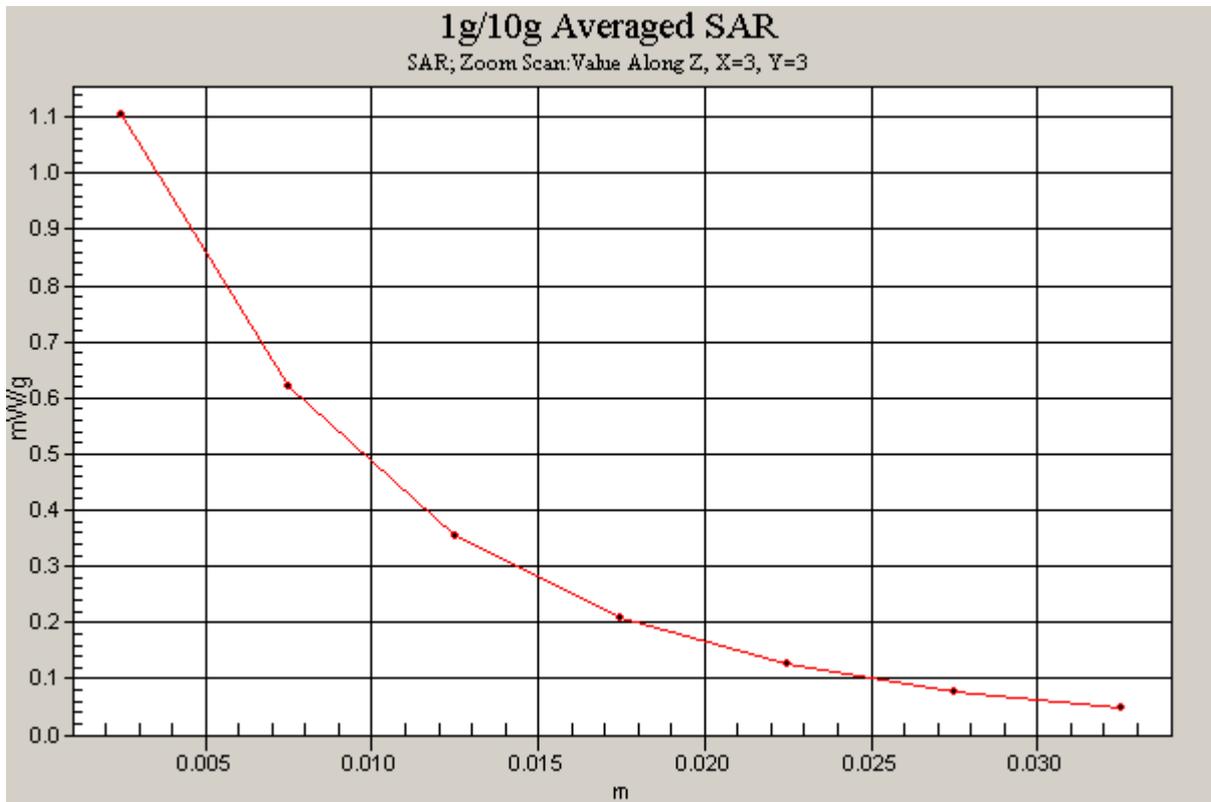


Figure 50 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 661]

Date/Time: 12/20/2008 3:26:47 AM

GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Low Frequency

Communication System: GSM 1900+GPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 3 Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.19 mW/g

Test Position 3 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.3 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.850 mW/g; SAR(10 g) = 0.433 mW/g

Maximum value of SAR (measured) = 1.14 mW/g

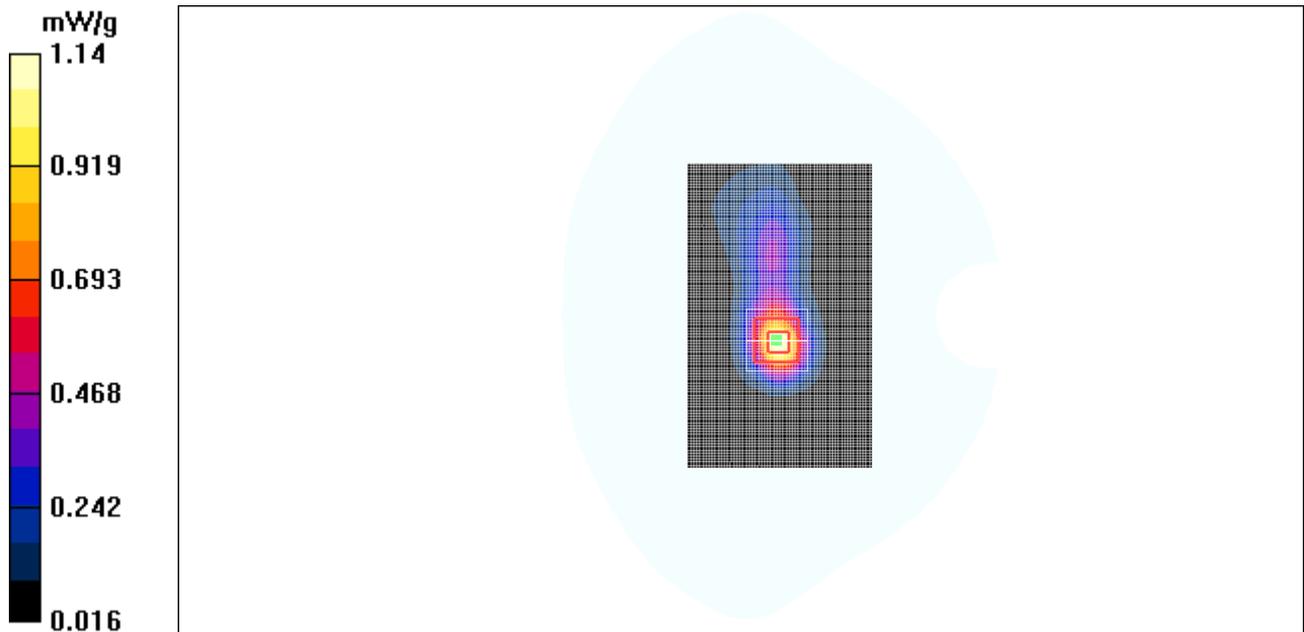


Figure 51 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 512

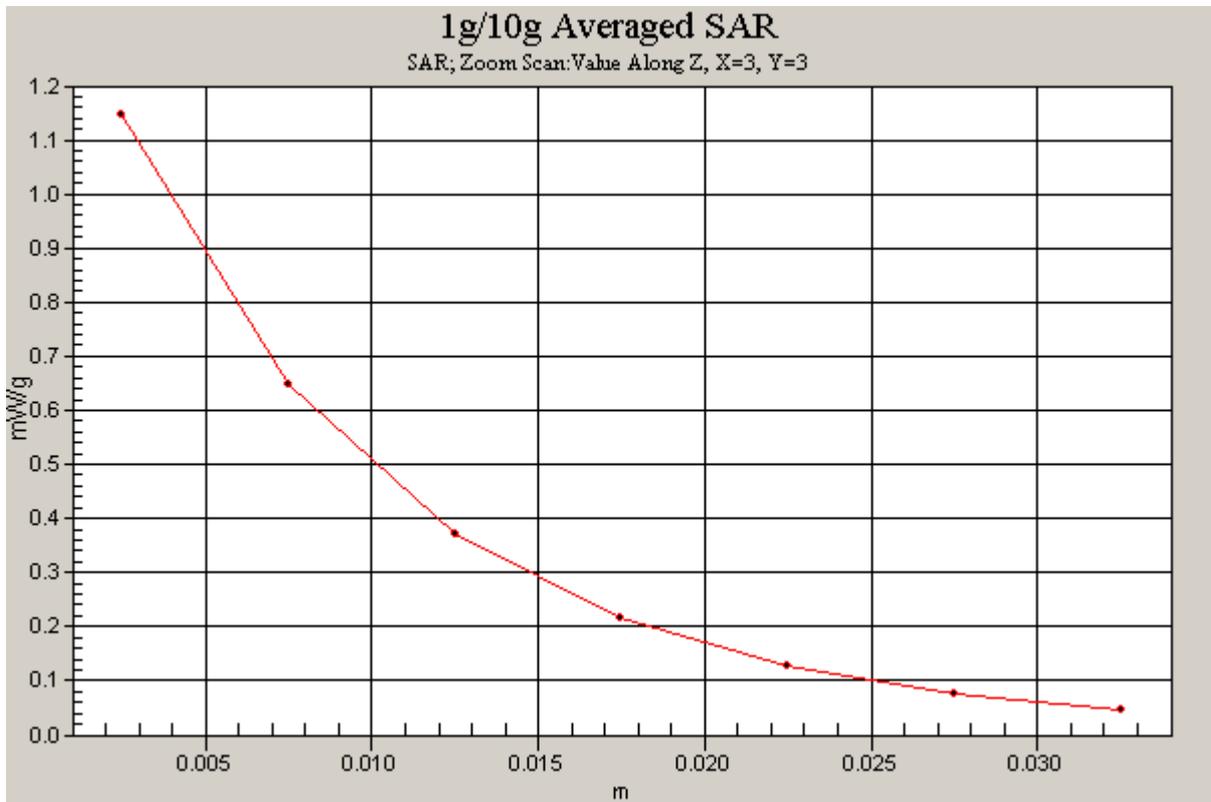


Figure 52 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 512]

Date/Time: 12/20/2008 6:10:03 AM

GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 4 Middle Frequency

Communication System: GSM 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 4 Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.765 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 16.2 V/m; Power Drift = -0.187 dB
Peak SAR (extrapolated) = 0.950 W/kg
SAR(1 g) = 0.510 mW/g; SAR(10 g) = 0.258 mW/g
Maximum value of SAR (measured) = 0.696 mW/g

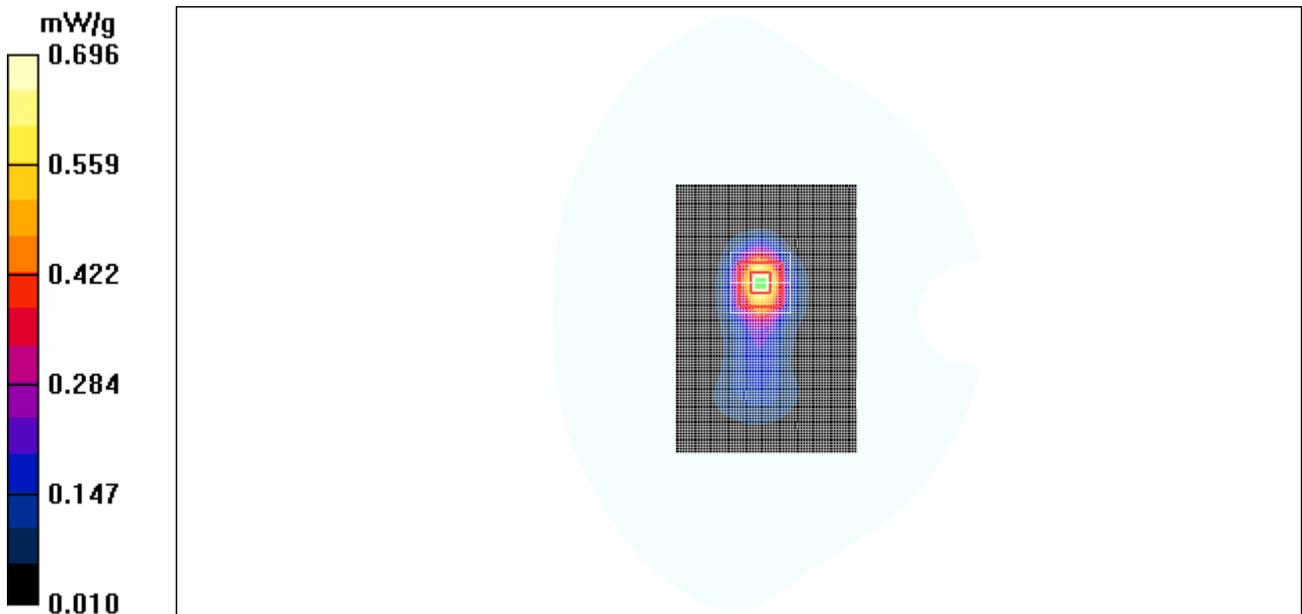


Figure 53 GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 4 Channel 661

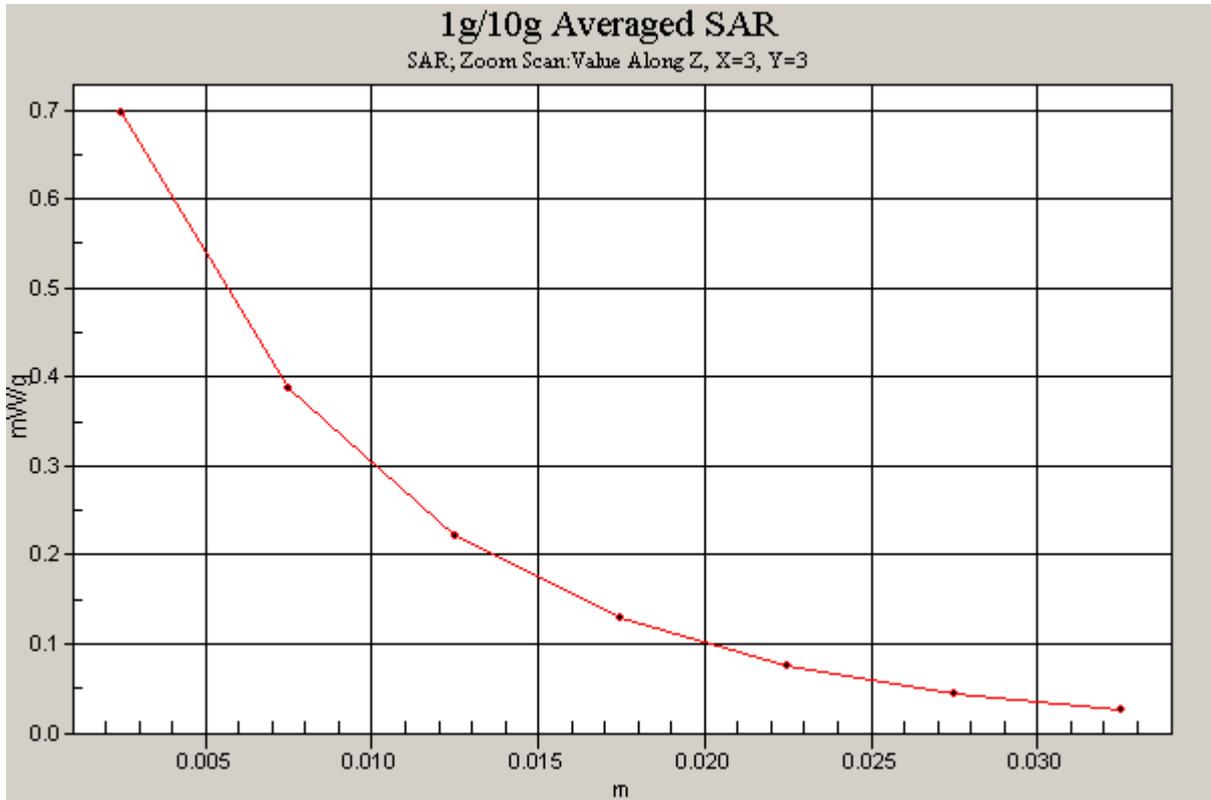


Figure 54 Z-Scan at power reference point (GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 4 Channel 661

Date/Time: 12/20/2008 6:32:54 AM

GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 5 Middle Frequency

Communication System: GSM 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 5 Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.541 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 17.3 V/m; Power Drift = 0.178 dB
Peak SAR (extrapolated) = 0.597 W/kg
SAR(1 g) = 0.352 mW/g; SAR(10 g) = 0.195 mW/g
Maximum value of SAR (measured) = 0.453 mW/g

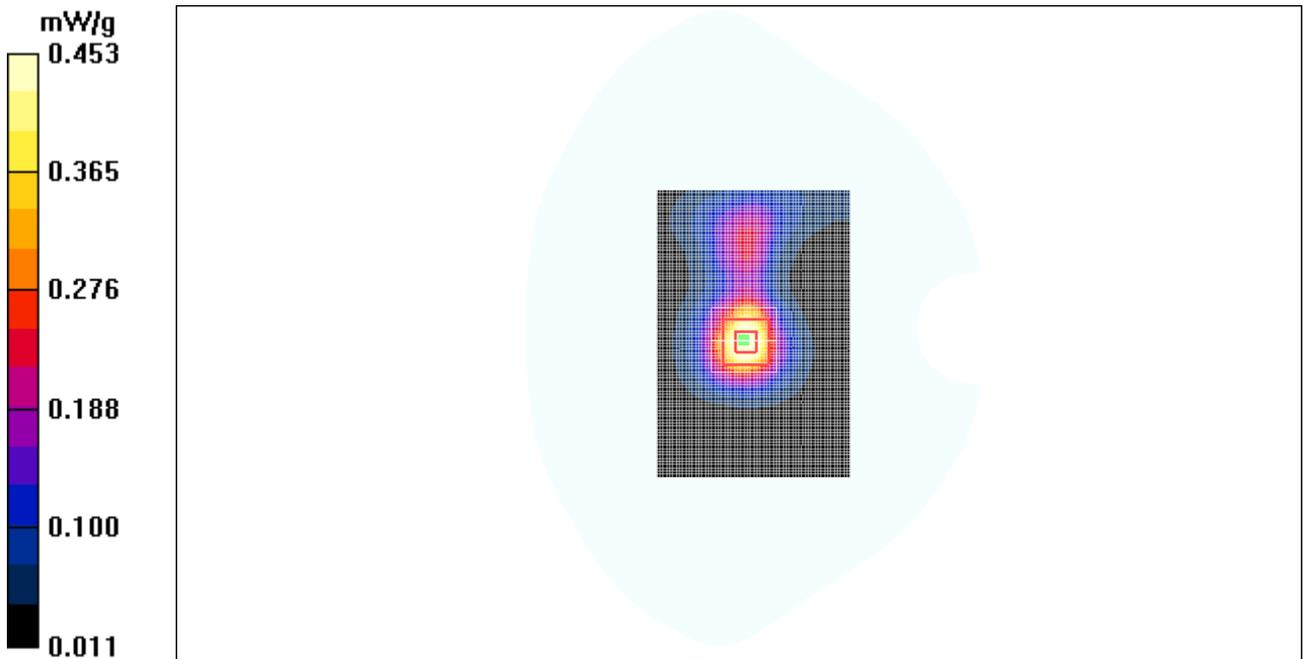


Figure 55 GSM 1900 GPRS (2 timeslots in uplink) with IBMT61 Test Position 5 Channel 661

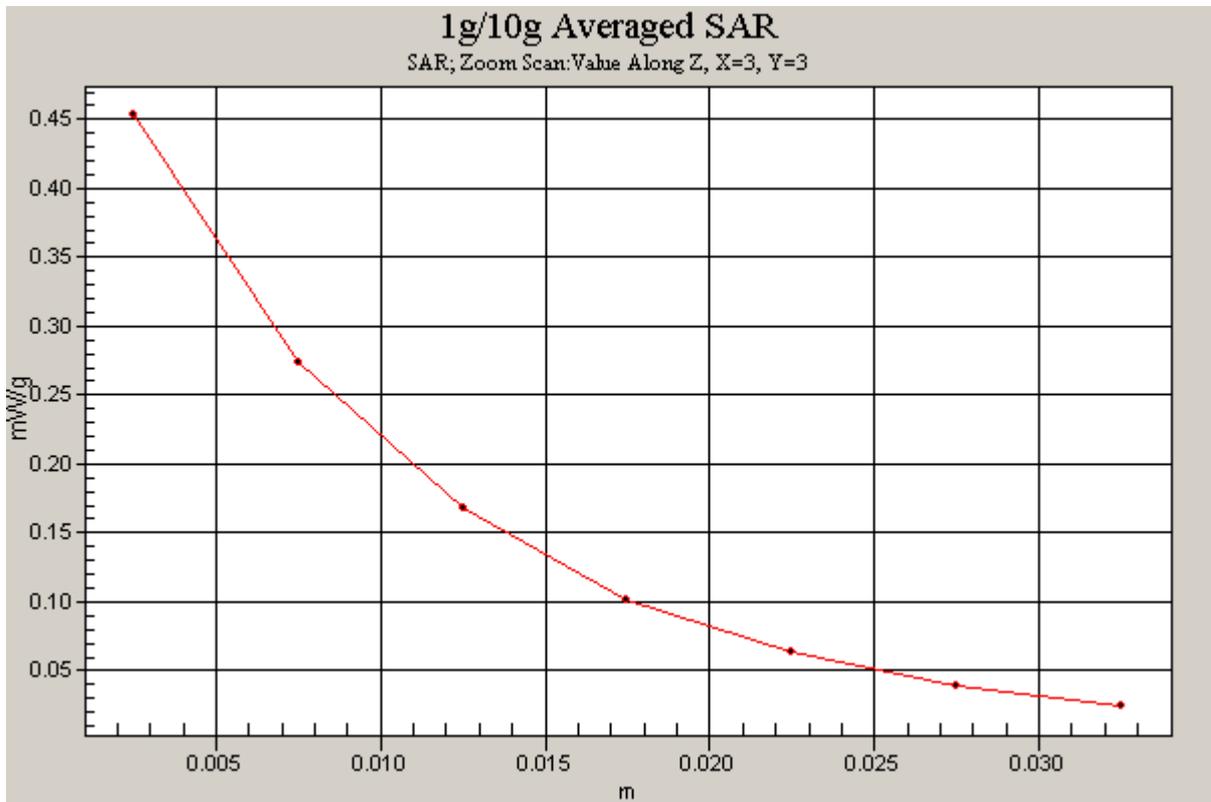


Figure 56 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with IBMT61 Test Position 5 Channel 661]

Date/Time: 12/23/2008 12:57:24 AM

GSM 1900 EGPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 High Frequency

Communication System: GSM 1900+EGPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 3 High/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.02 mW/g

Test Position 3 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.0 V/m; Power Drift = -0.049 dB
Peak SAR (extrapolated) = 1.24 W/kg
SAR(1 g) = 0.722 mW/g; SAR(10 g) = 0.388 mW/g
Maximum value of SAR (measured) = 0.937 mW/g

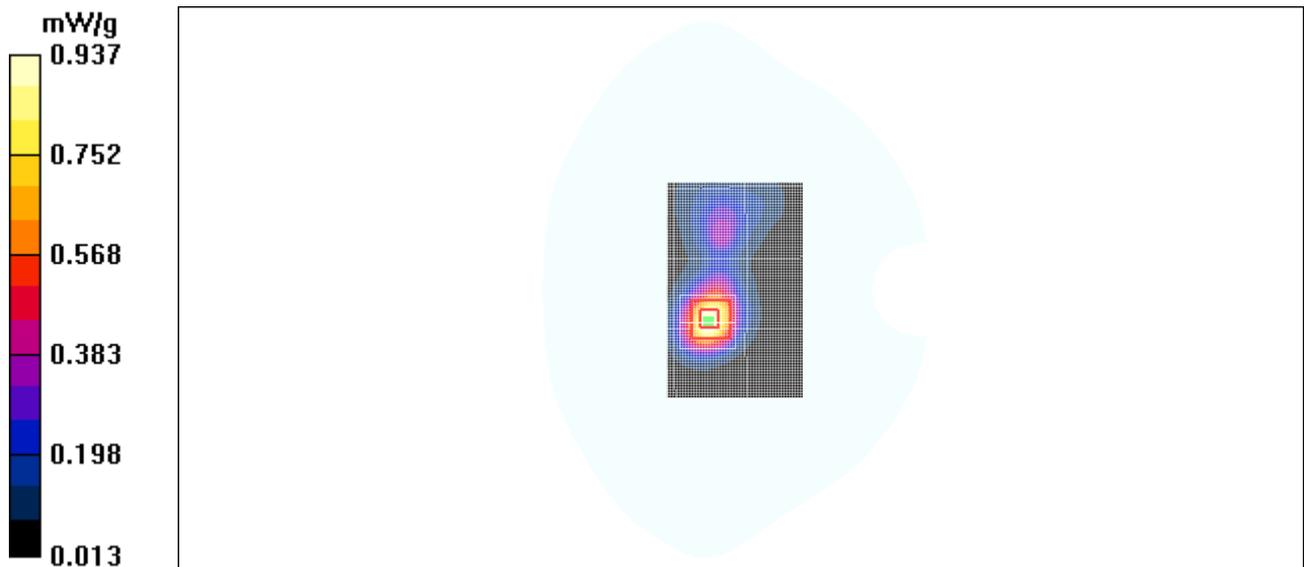


Figure 57 GSM 1900 EGPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 810

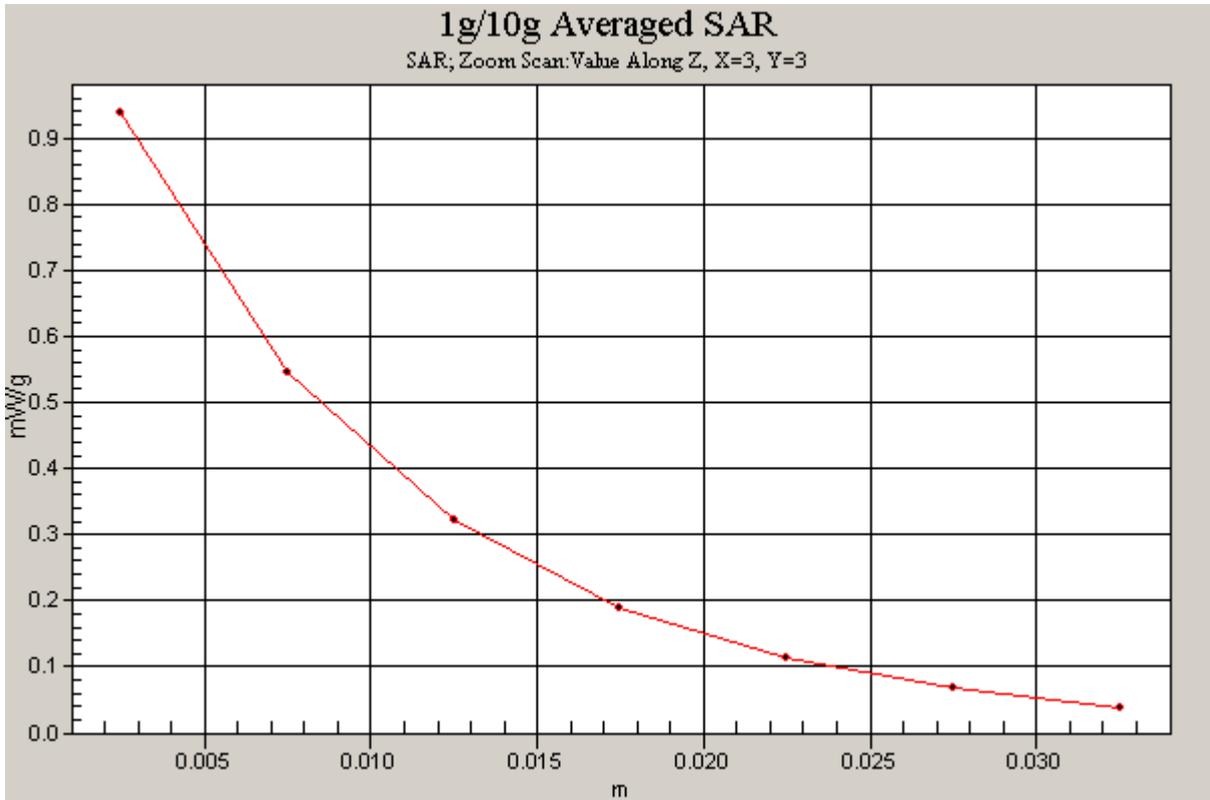


Figure 58 Z-Scan at power reference point [GSM 1900 EGPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 810]

Date/Time: 12/23/2008 1:34:39 AM

WCDMA Band II with BenQ Joybook R55V Test Position 1 Middle Frequency

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 1 Middle/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.846 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.2 V/m; Power Drift = 0.077 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.593 mW/g; SAR(10 g) = 0.322 mW/g

Maximum value of SAR (measured) = 0.777 mW/g

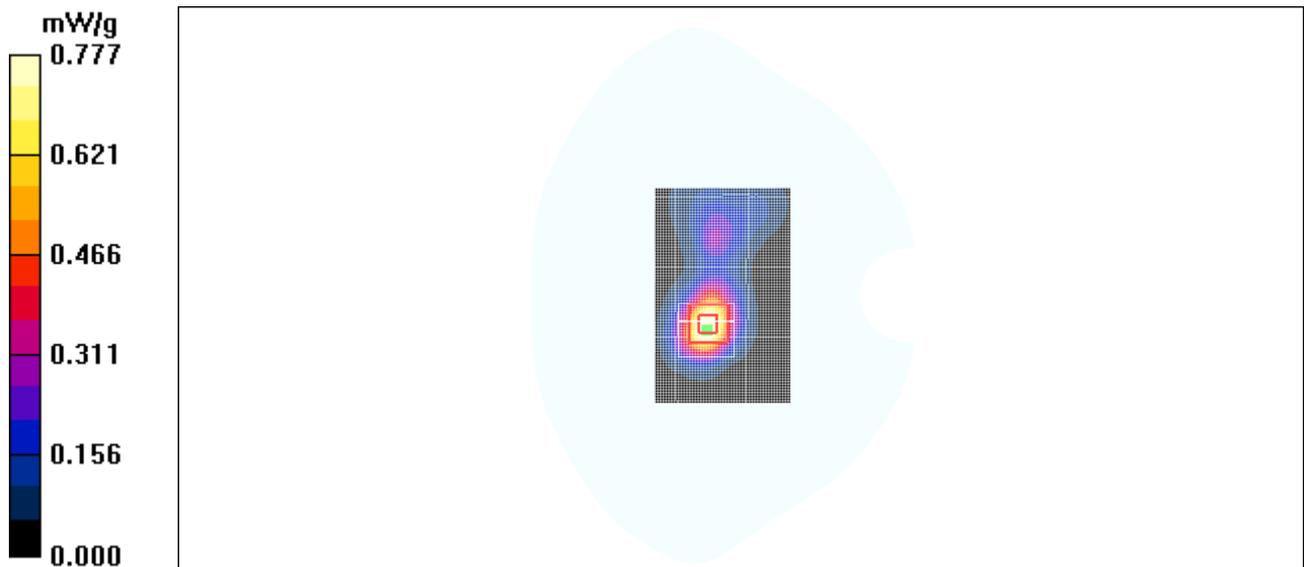


Figure 59 WCDMA Band II with BenQ Joybook R55V Test Position 1 Channel 9400

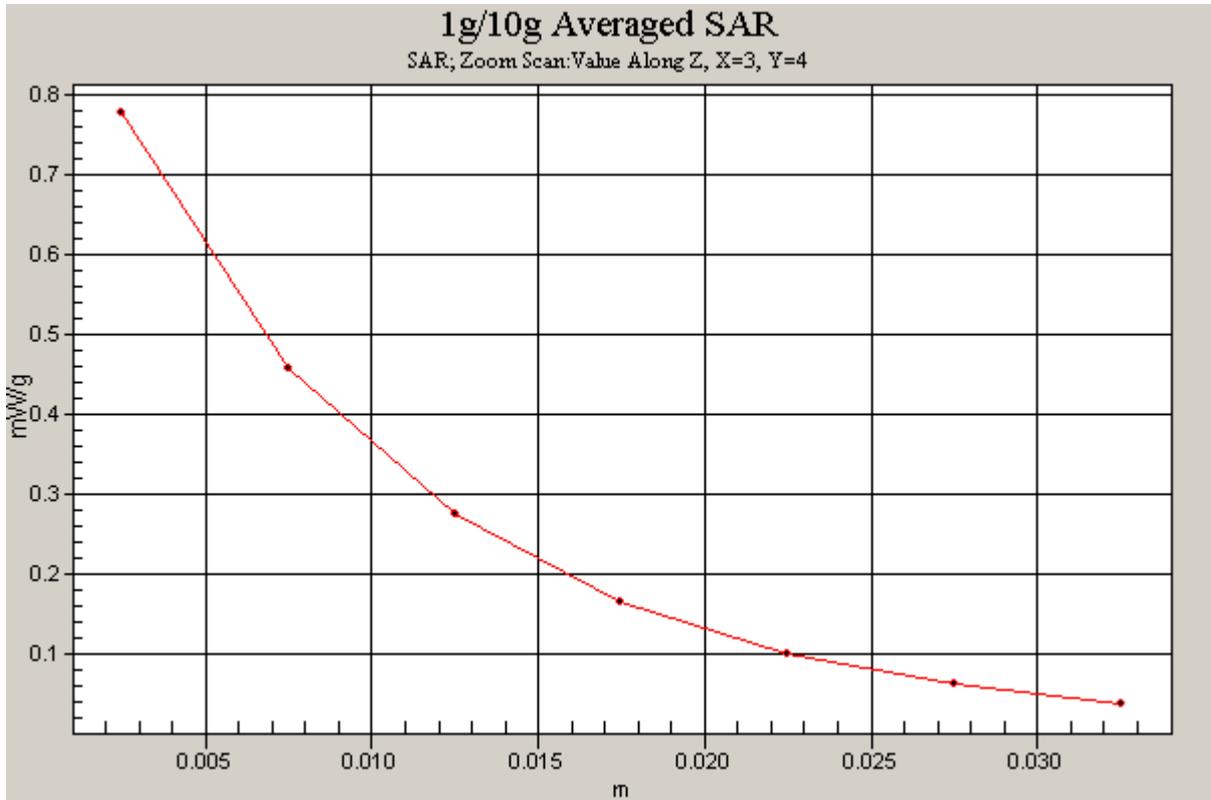


Figure 60 Z-Scan at power reference point (WCDMA Band II with BenQ Joybook R55V Test Position 1 Channel 9400)

Date/Time: 12/23/2008 2:13:15 AM

WCDMA Band II with BenQ Joybook R55V Test Position 2 Middle Frequency

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 2 Middle/Area Scan (51x51x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.236 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.363 W/kg

SAR(1 g) = 0.161 mW/g; SAR(10 g) = 0.080 mW/g

Maximum value of SAR (measured) = 0.253 mW/g

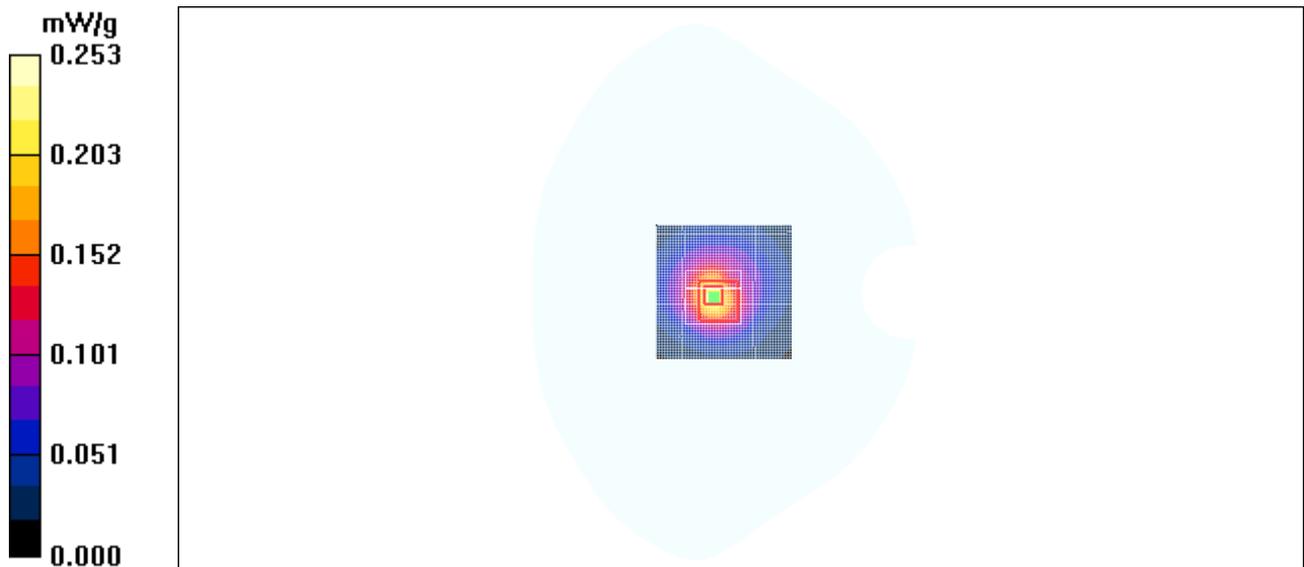


Figure 61 WCDMA Band II with BenQ Joybook R55V Test Position 2 Channel 9400

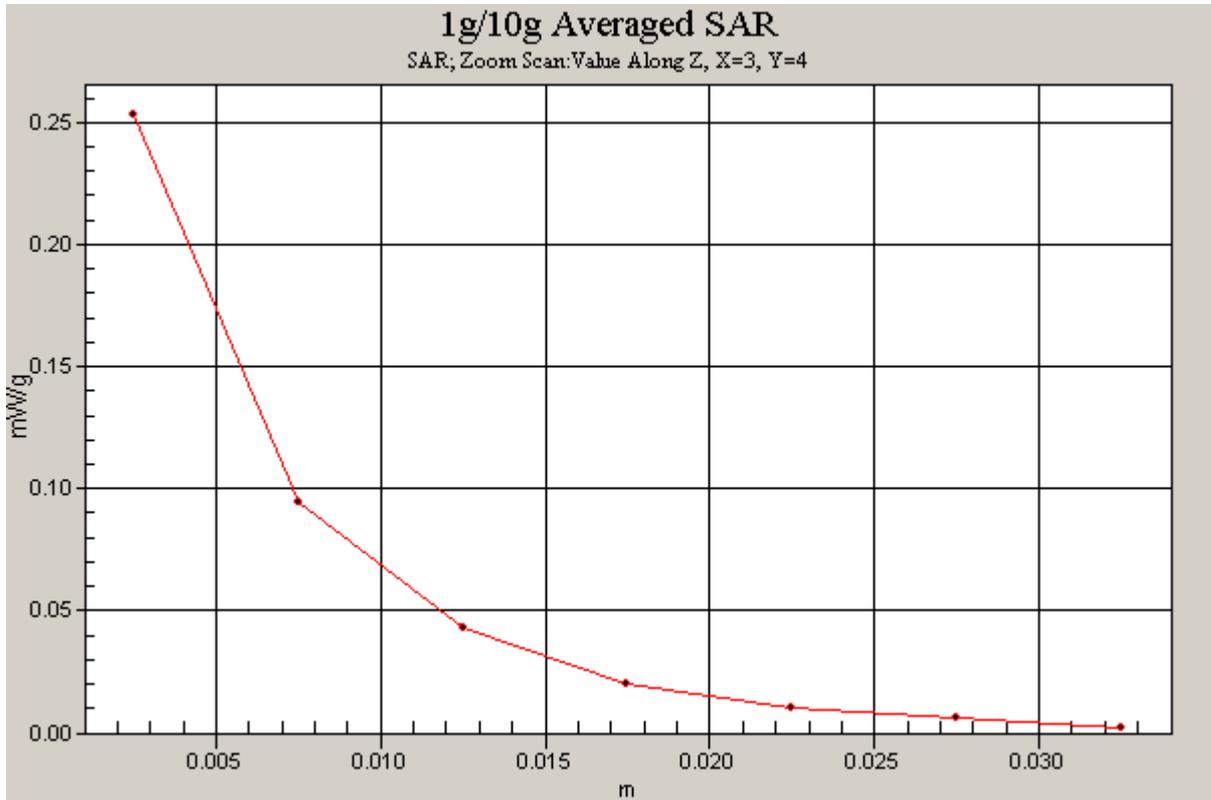


Figure 62 Z-Scan at power reference point (WCDMA Band II with BenQ Joybook R55V Test Position 2 Channel 9400)

Date/Time: 12/23/2008 3:28:13 AM

WCDMA Band II with BenQ Joybook R55V Test Position 3 High Frequency

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 3 High/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.09 mW/g

Test Position 3 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.6 V/m; Power Drift = 0.074 dB

Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 0.667 mW/g; SAR(10 g) = 0.298 mW/g

Maximum value of SAR (measured) = 1.04 mW/g

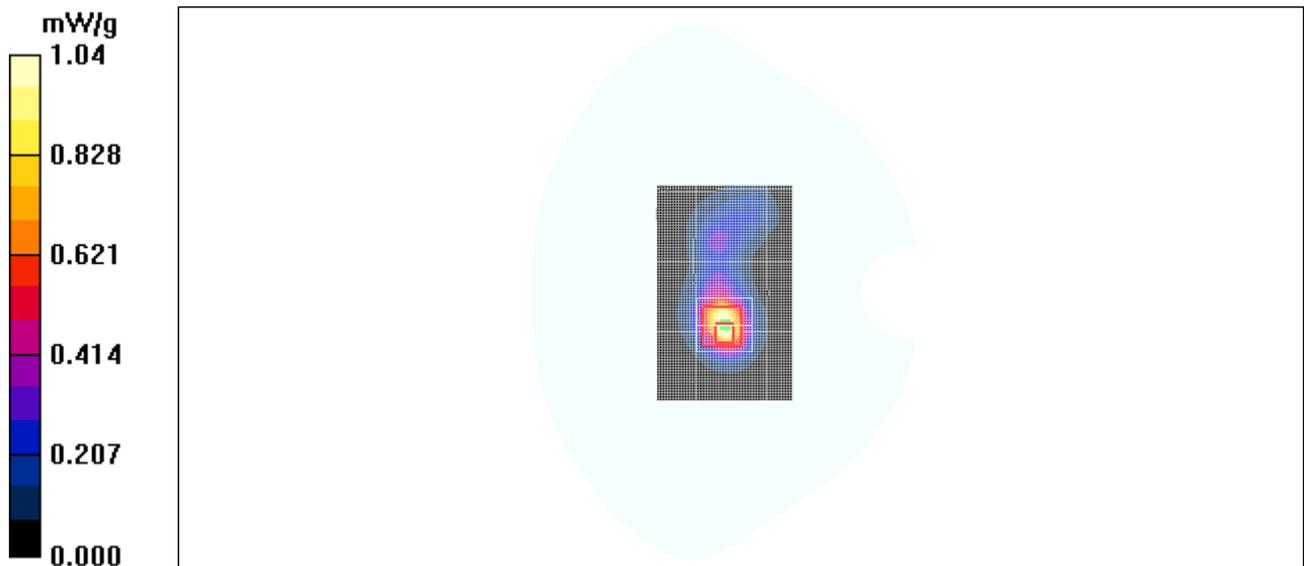


Figure 63 WCDMA Band II with BenQ Joybook R55V Test Position 3 Channel 9538

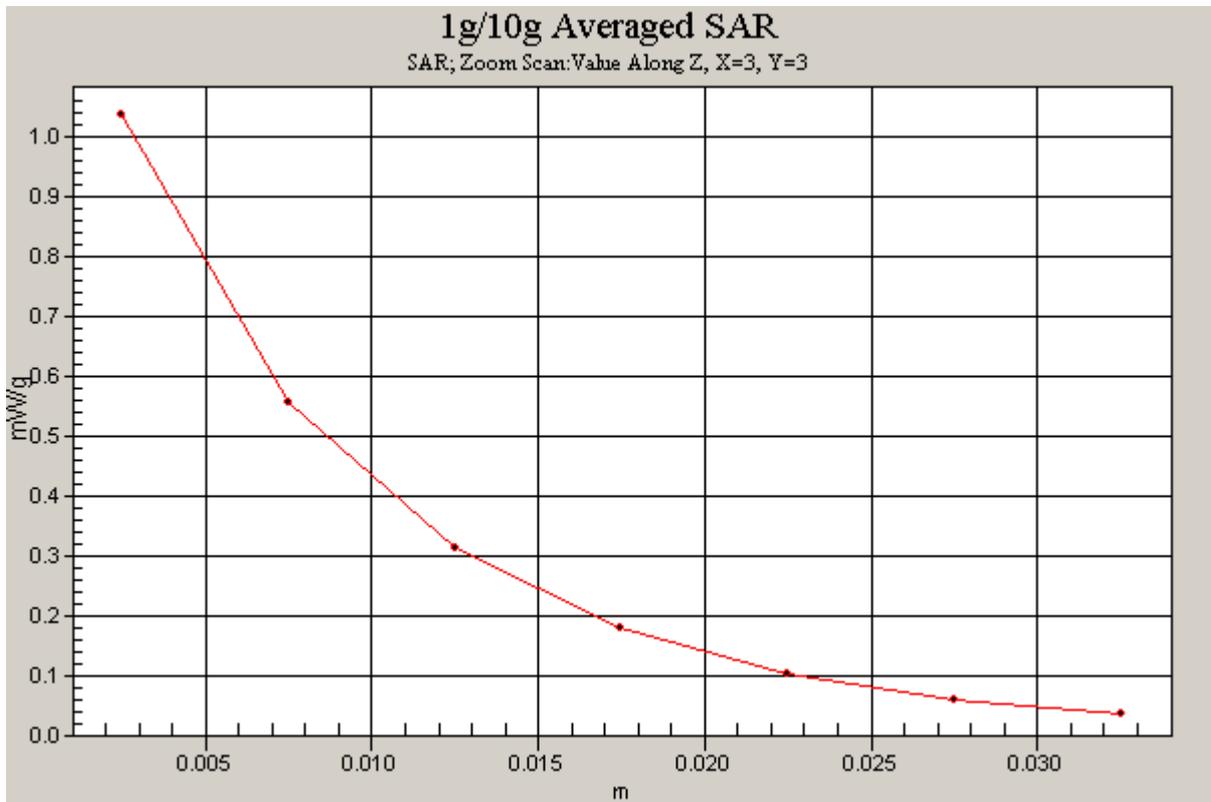


Figure 64 Z-Scan at power reference point (WCDMA Band II with BenQ Joybook R55V Test Position 3 Channel 9538)

WCDMA Band II with BenQ Joybook R55V Test Position 3 Middle Frequency

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 3 Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.893 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.0 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.318 mW/g

Maximum value of SAR (measured) = 0.842 mW/g

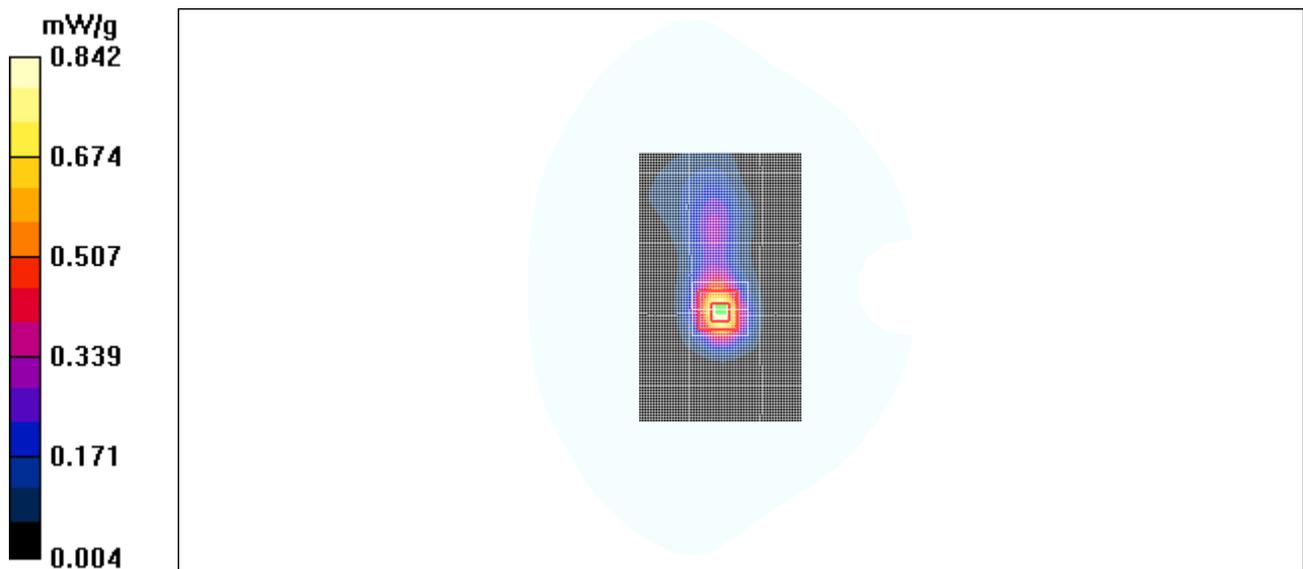


Figure 65 WCDMA Band II with BenQ Joybook R55V Test Position 3 Channel 9400

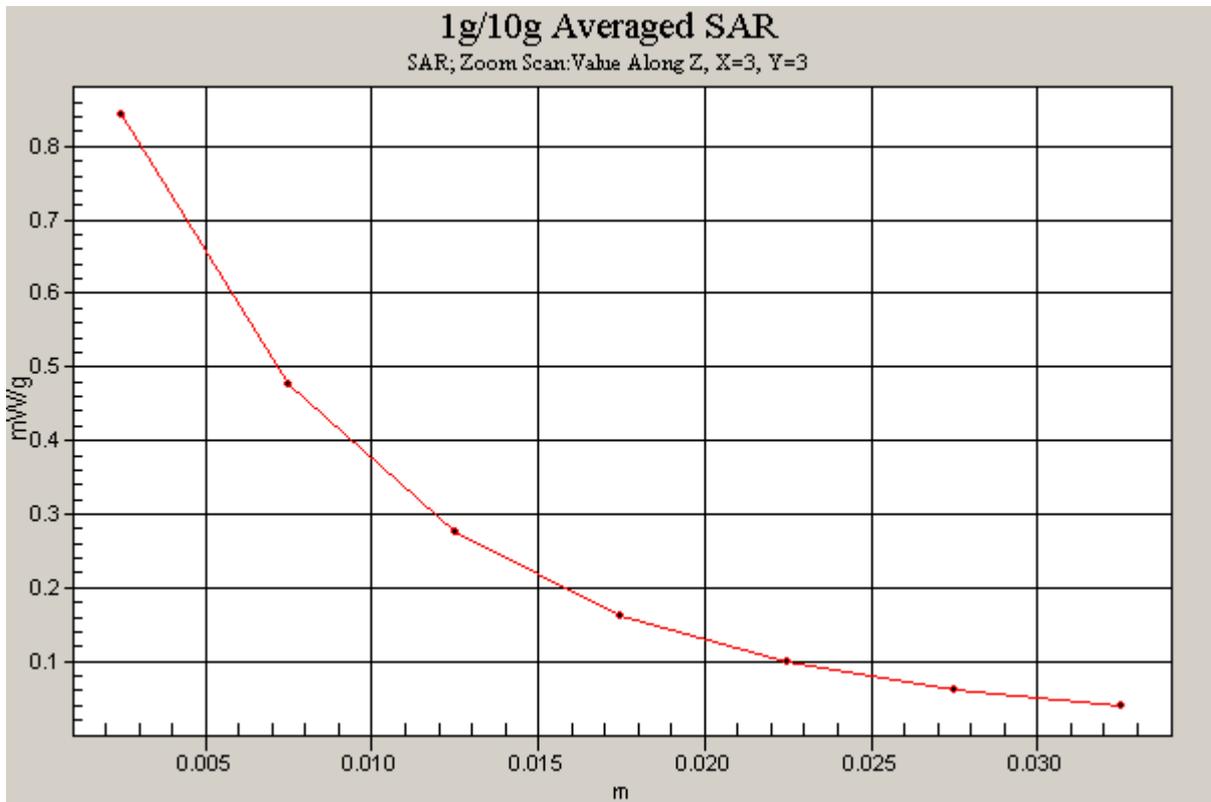


Figure 66 Z-Scan at power reference point (WCDMA Band II with BenQ Joybook R55V Test Position 3 Channel 9400)

Date/Time: 12/23/2008 3:47:48 AM

WCDMA Band II with BenQ Joybook R55V Test Position 3 Low Frequency

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 3 Low/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.25 mW/g

Test Position 3 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.809 mW/g; SAR(10 g) = 0.413 mW/g

Maximum value of SAR (measured) = 1.10 mW/g

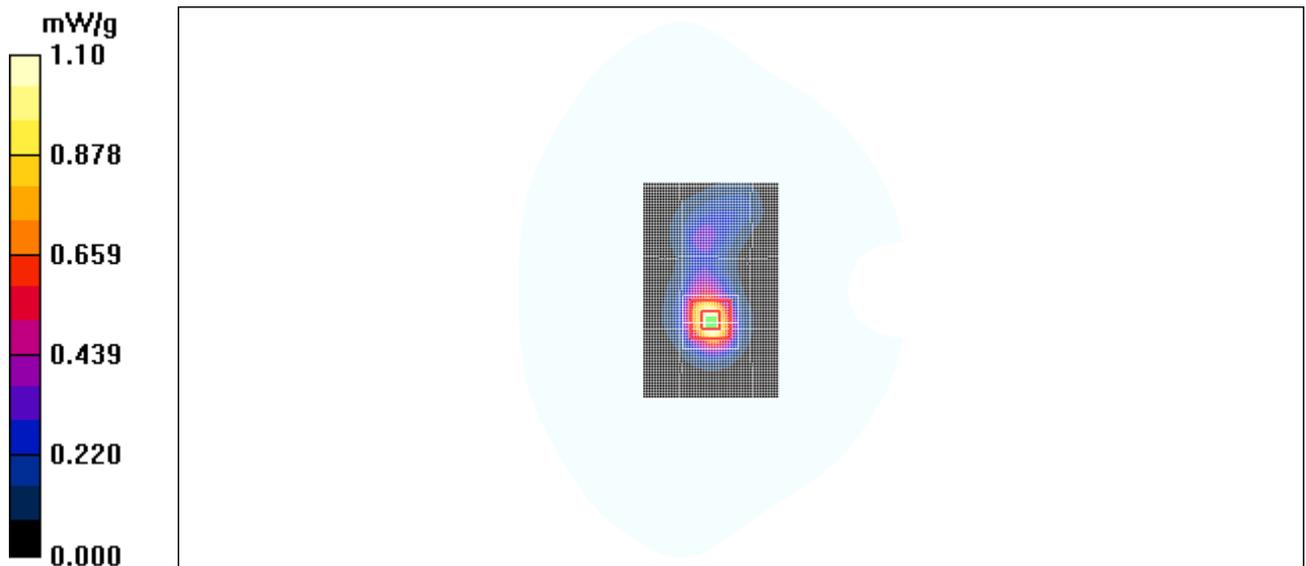


Figure 67 WCDMA Band II with BenQ Joybook R55V Test Position 3 Channel 9262

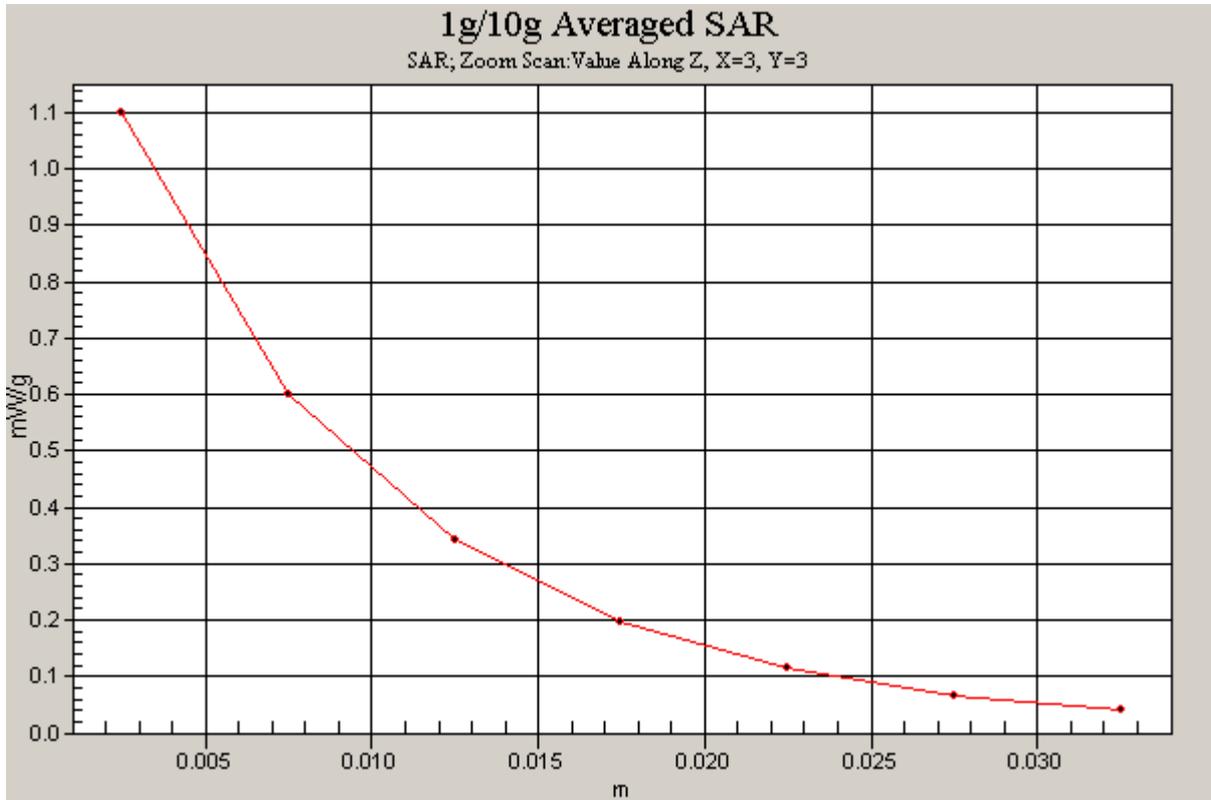


Figure 68 Z-Scan at power reference point (WCDMA Band II with BenQ Joybook R55V Test Position 3 Channel 9262)

WCDMA Band II with IBM T61 Test Position 4 Middle Frequency

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 4 Middle/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.426 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = -0.174 dB

Peak SAR (extrapolated) = 0.547 W/kg

SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.172 mW/g

Maximum value of SAR (measured) = 0.415 mW/g

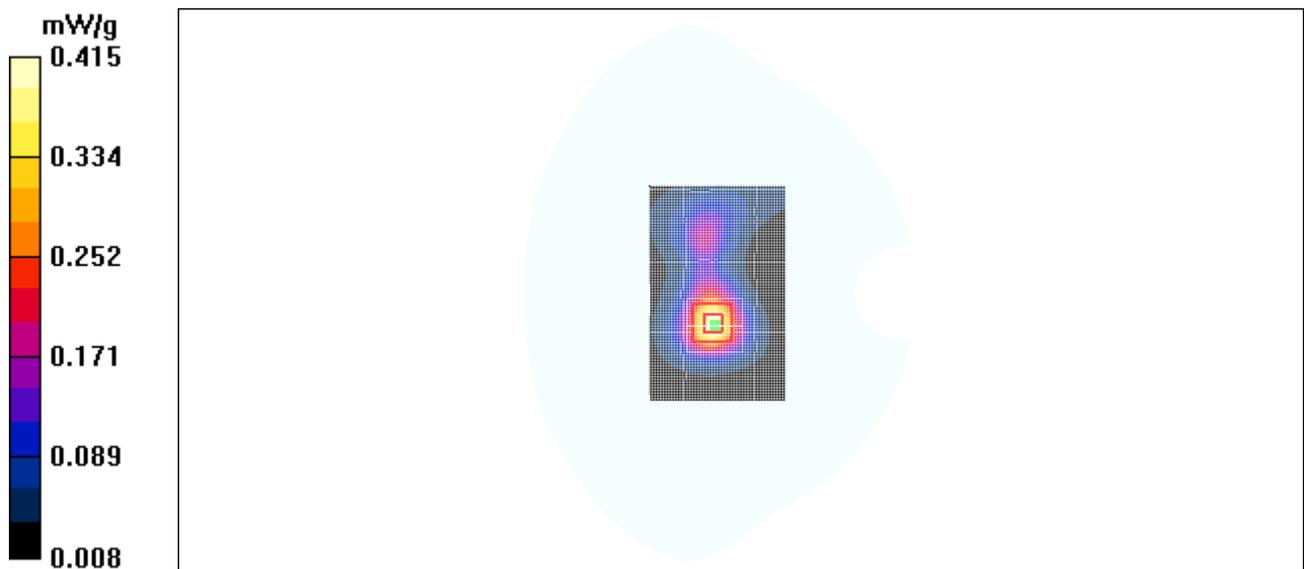


Figure 69 WCDMA Band II with IBM T61 Test Position 4 Channel 9400

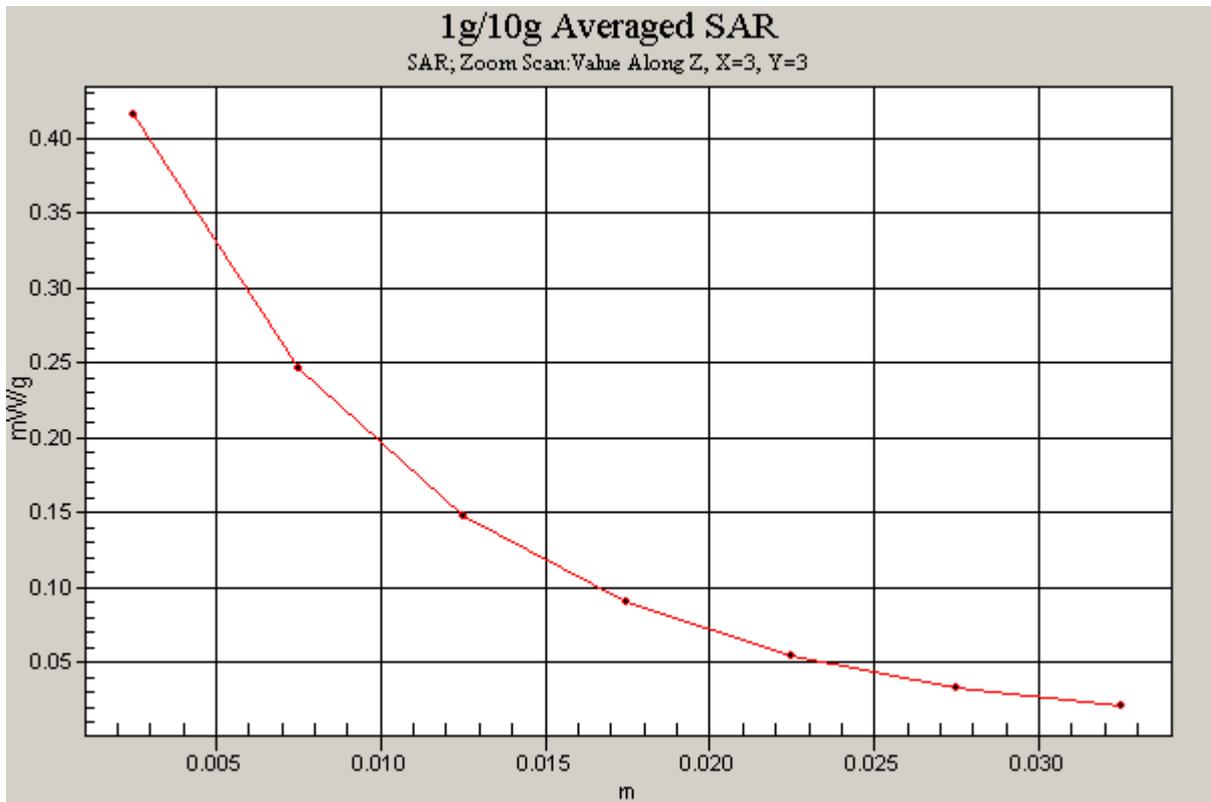


Figure 70 Z-Scan at power reference point (WCDMA Band II with IBM T61 Test Position 4 Channel 9400)

Date/Time: 12/23/2008 2:42:21 AM

WCDMA Band II with IBM T61 Test Position 5 Middle Frequency

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 5 Middle/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.741 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.8 V/m; Power Drift = 0.157 dB

Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.449 mW/g; SAR(10 g) = 0.227 mW/g

Maximum value of SAR (measured) = 0.601 mW/g

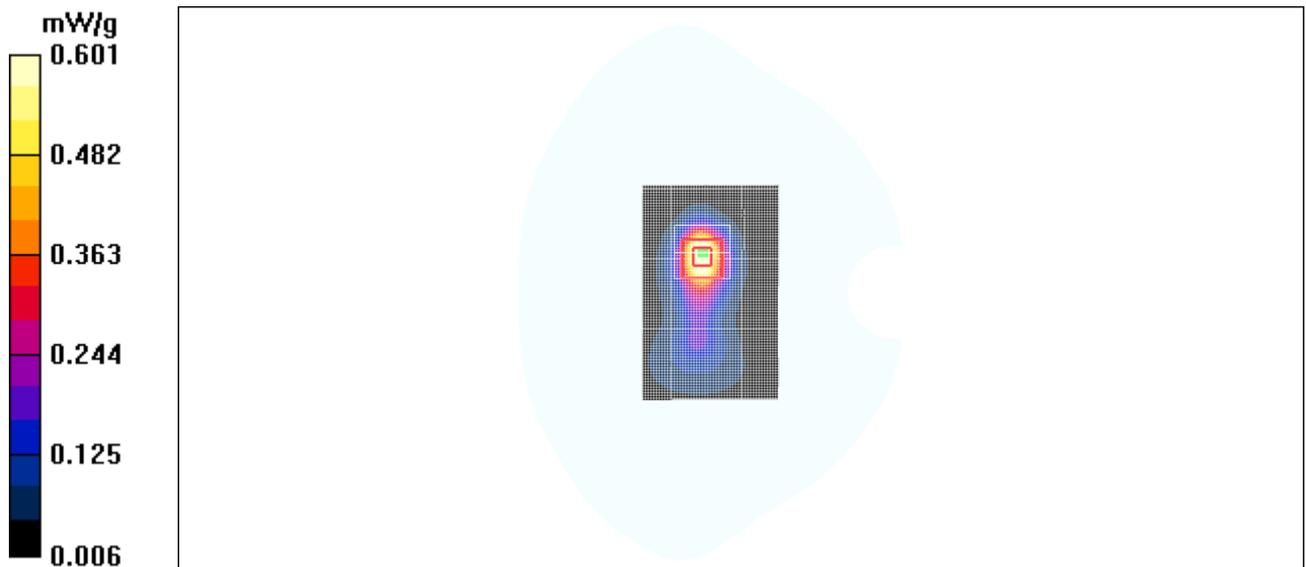


Figure 71 WCDMA Band II with IBM T61 Test Position 5 Channel 9400

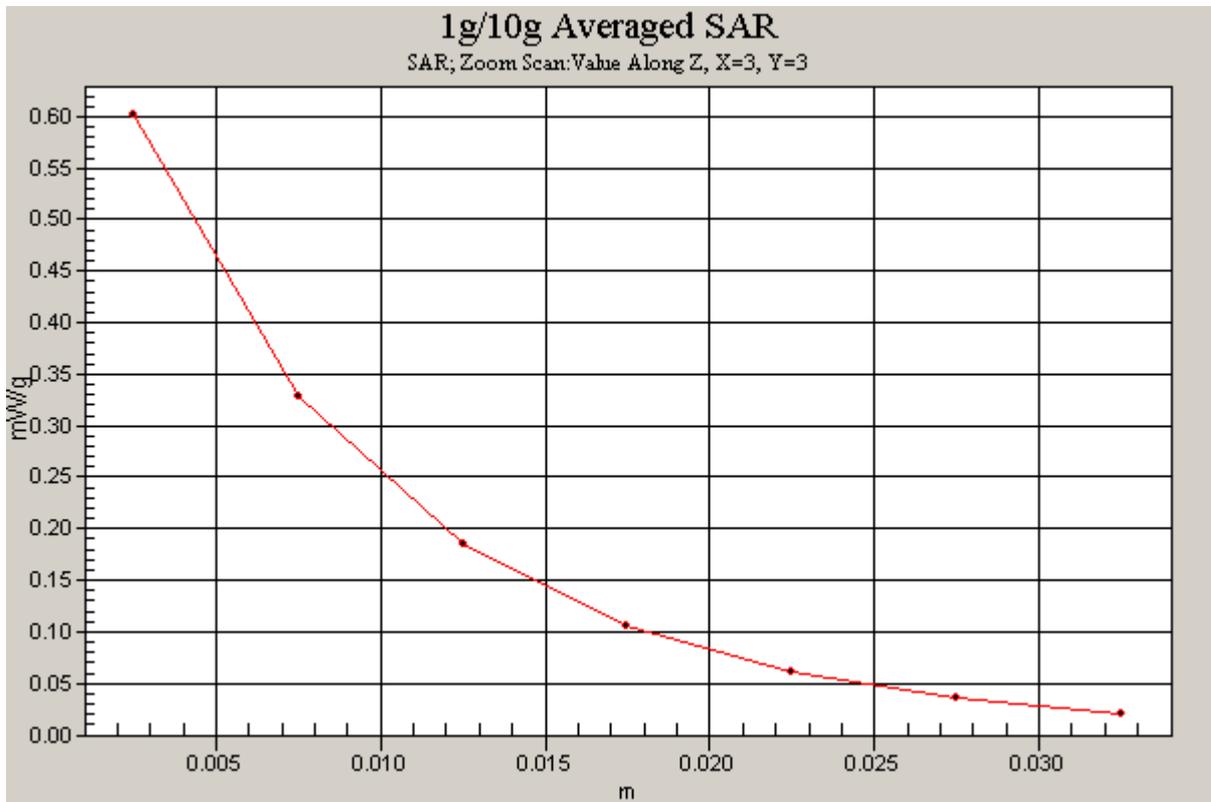


Figure 72 Z-Scan at power reference point (WCDMA Band II with IBM T61 Test Position 5 Channel 9400)

Date/Time: 12/25/2008 2:01:10 PM

WCDMA Band II HSDPA with BenQ Joybook R55V Test Position 3 Low Frequency

Communication System: WCDMA Band II+HSDPA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45);
- Electronics: DAE3 Sn536;

Test Position 3 Low/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.25 mW/g

Test Position 3 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.9 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.746 mW/g; SAR(10 g) = 0.387 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

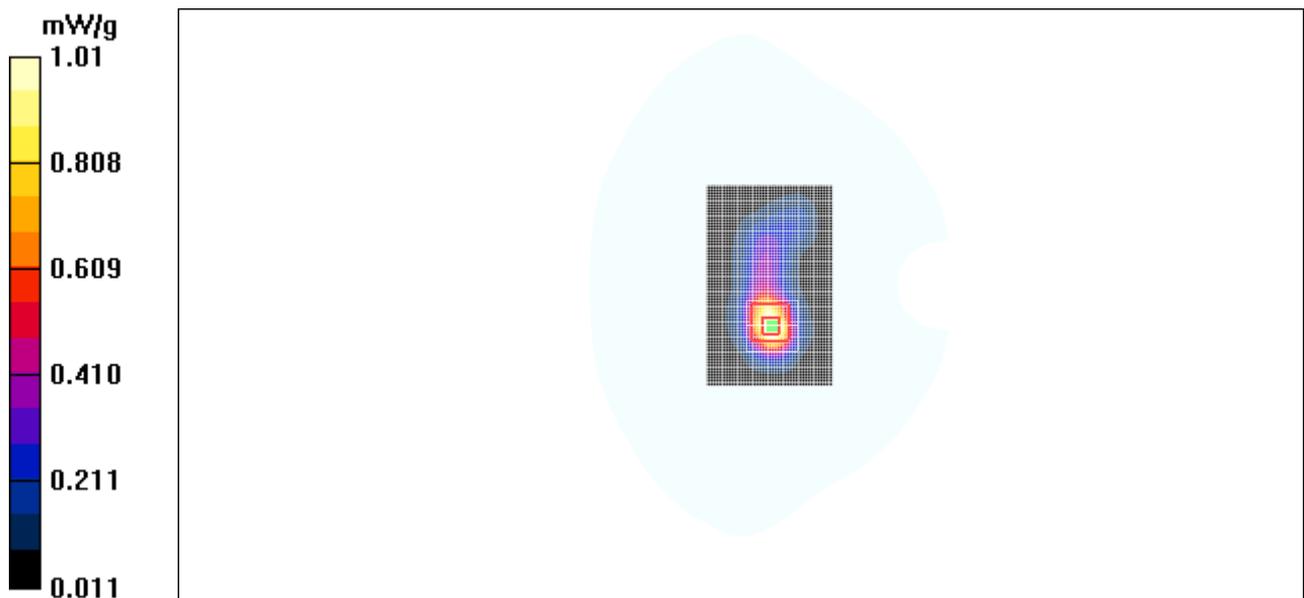


Figure 73 WCDMA Band II HSDPA with BenQ Joybook R55V Test Position 3 Channel 9262

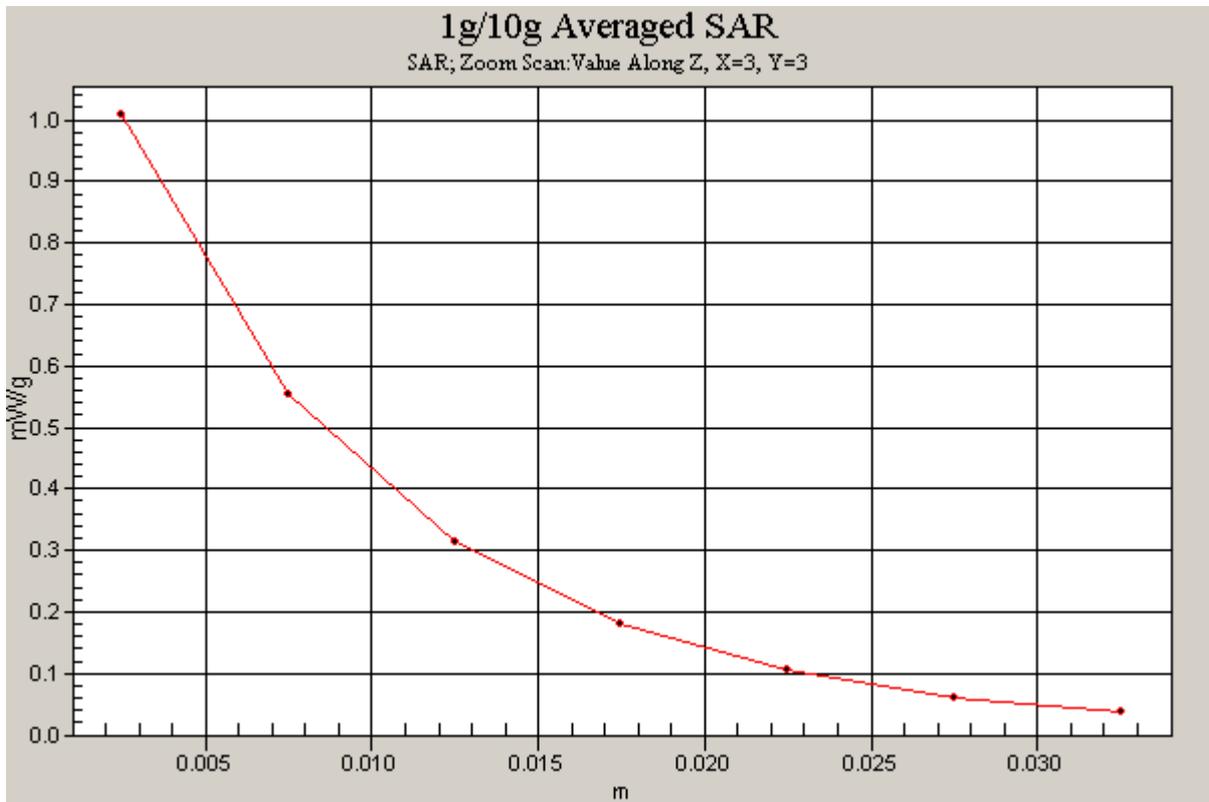


Figure 74 Z-Scan at power reference point (WCDMA Band II HSDPA with BenQ Joybook R55V
Test Position 3 Channel 9262)

Date/Time: 12/23/2008 6:17:19 AM

WCDMA Band V with BenQ Joybook R55V Test Position 1 High Frequency

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.995$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 1 High/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.875 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.8 V/m; Power Drift = -0.198 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.701 mW/g; SAR(10 g) = 0.449 mW/g

Maximum value of SAR (measured) = 0.859 mW/g

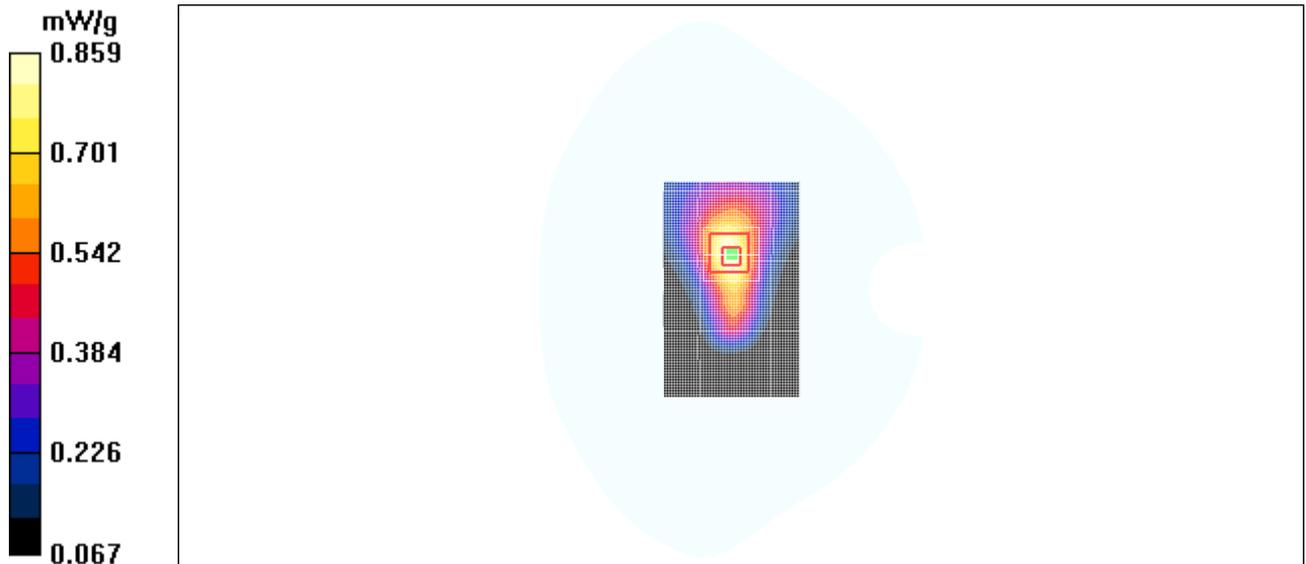


Figure 75 WCDMA Band V with BenQ Joybook R55V Test Position 1 Channel 4233

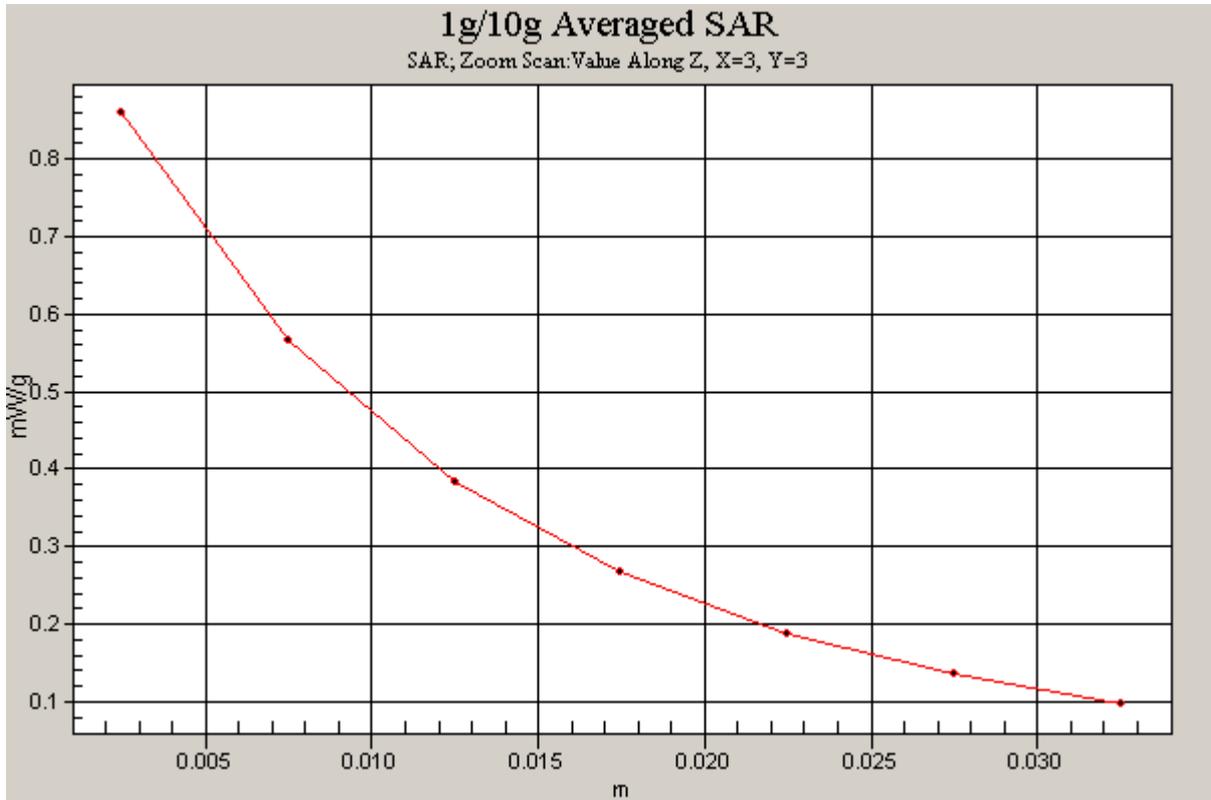


Figure 76 Z-Scan at power reference point (WCDMA Band V with BenQ Joybook R55V Test Position 1 Channel 4233)

Date/Time: 12/23/2008 7:44:35 AM

WCDMA Band V with BenQ Joybook R55V Test Position 1 Middle Frequency

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.986$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 1 Middle/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.785 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.7 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 0.996 W/kg

SAR(1 g) = 0.643 mW/g; SAR(10 g) = 0.404 mW/g

Maximum value of SAR (measured) = 0.795 mW/g

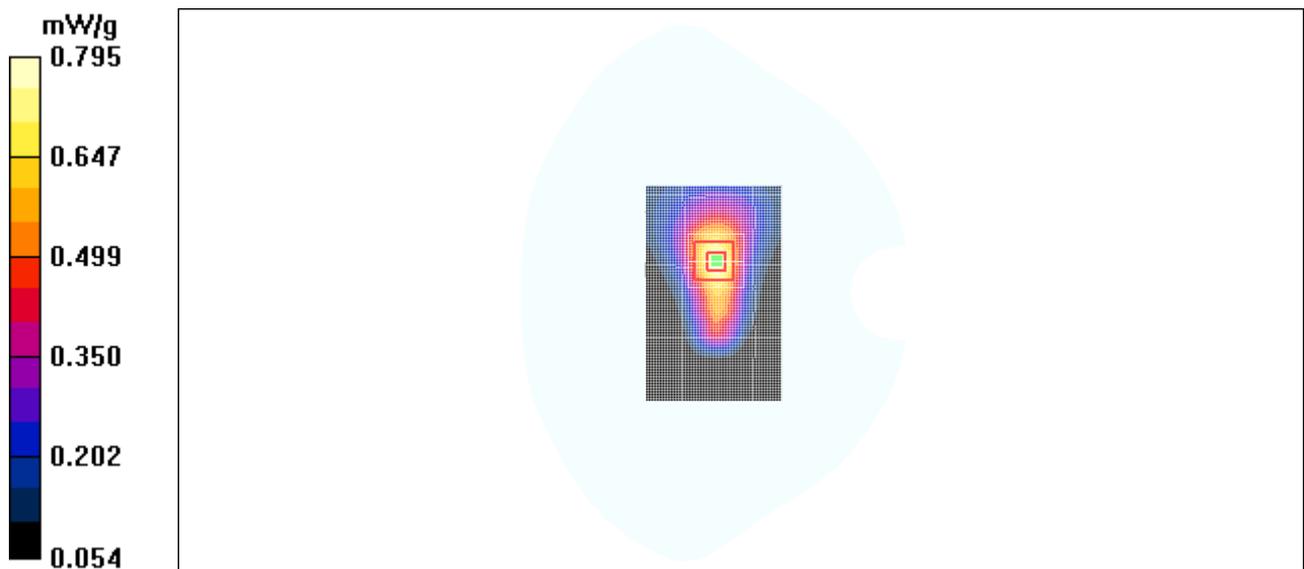


Figure 77 WCDMA Band V with BenQ Joybook R55V Test Position 1 Channel 4182

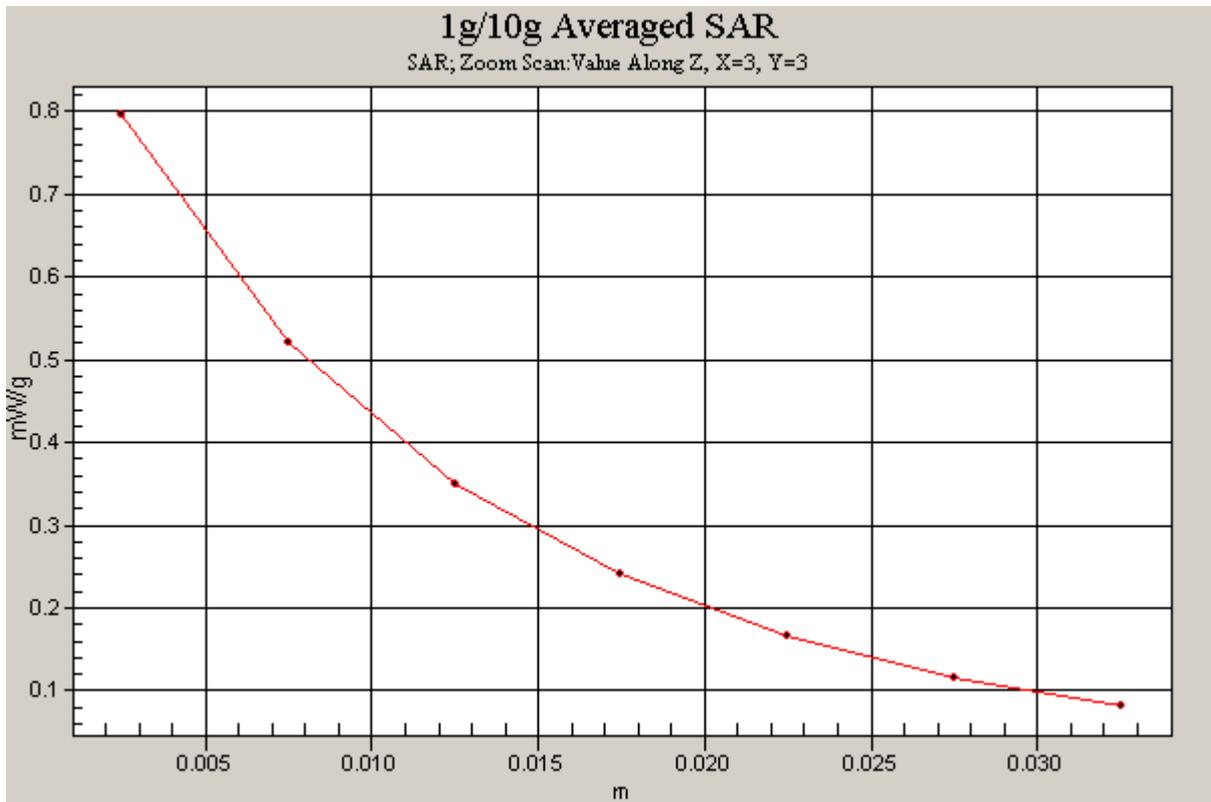


Figure 78 Z-Scan at power reference point (WCDMA Band V with BenQ Joybook R55V Test Position 1 Channel 4182)

Date/Time: 12/23/2008 6:34:39 AM

WCDMA Band V with BenQ Joybook R55V Test Position 1 Low Frequency

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.974$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 1 Low/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.931 mW/g

Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.5 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.745 mW/g; SAR(10 g) = 0.475 mW/g

Maximum value of SAR (measured) = 0.919 mW/g

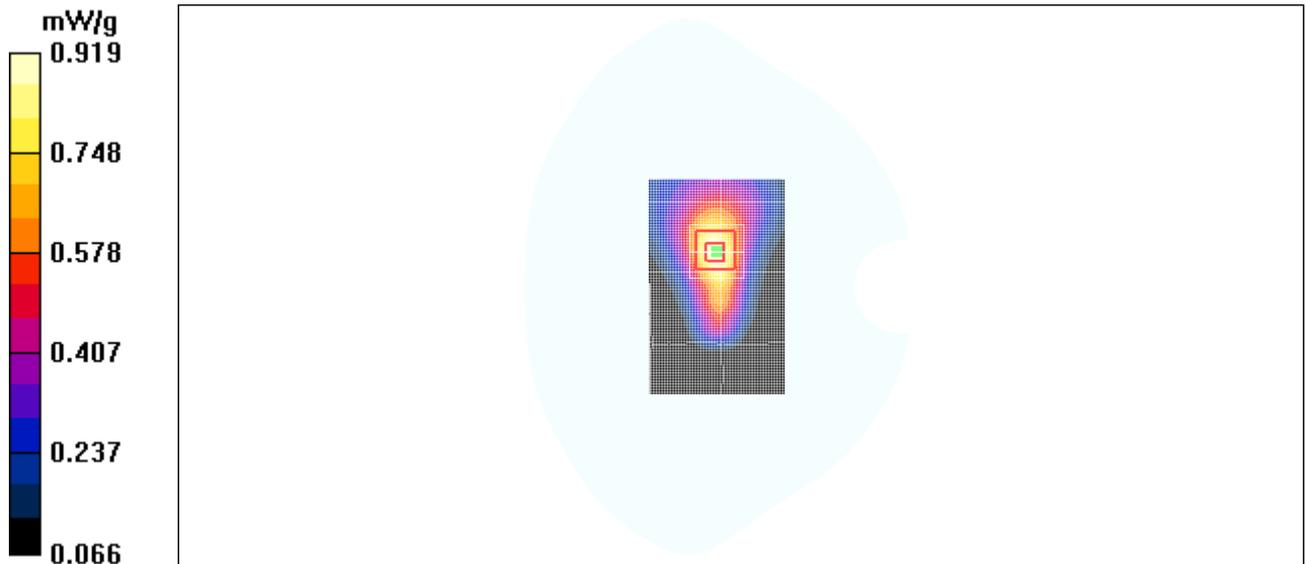


Figure 79 WCDMA Band V with BenQ Joybook R55V Test Position 1 Channel 4132

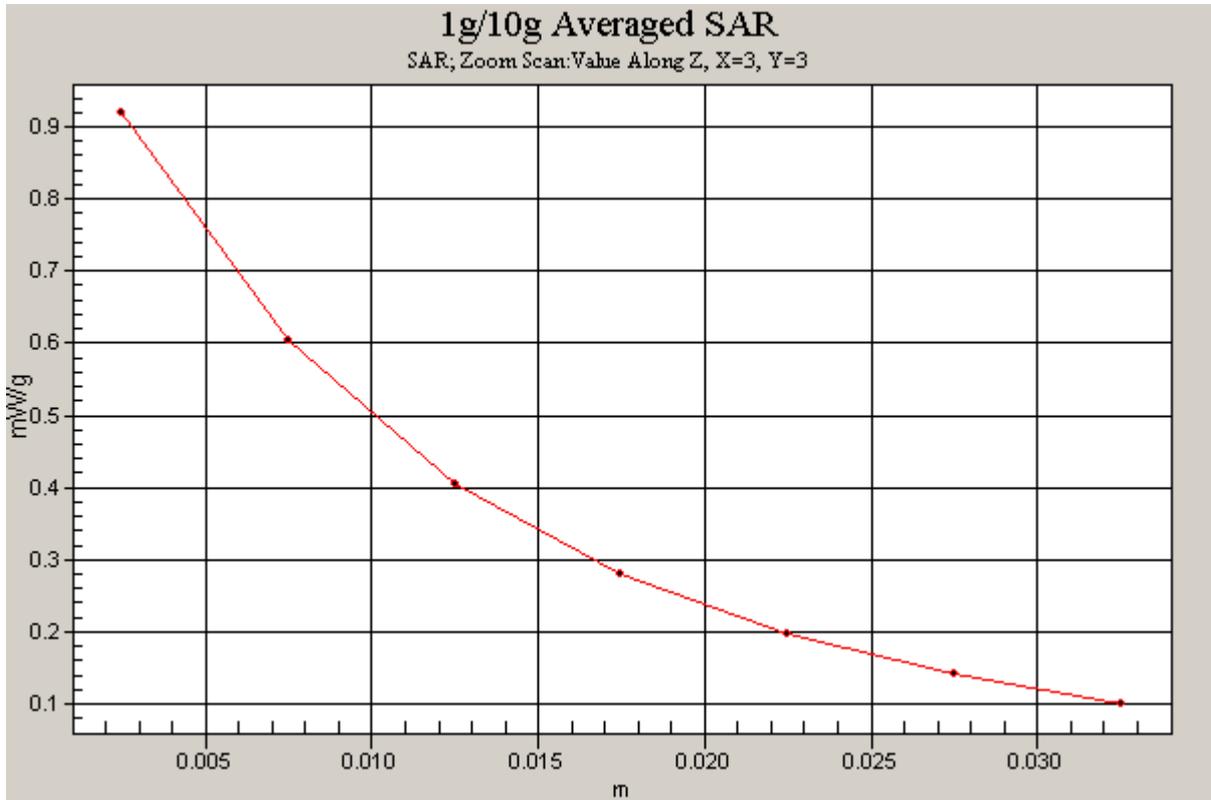


Figure 80 Z-Scan at power reference point (WCDMA Band V with BenQ Joybook R55V Test Position 1 Channel 4132)

Date/Time: 12/23/2008 5:08:07 AM

WCDMA Band V with BenQ Joybook R55V Test Position 2 Middle Frequency

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.986$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 2 Middle/Area Scan (51x51x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.050 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.37 V/m; Power Drift = 0.182 dB

Peak SAR (extrapolated) = 0.145 W/kg

SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.072 mW/g

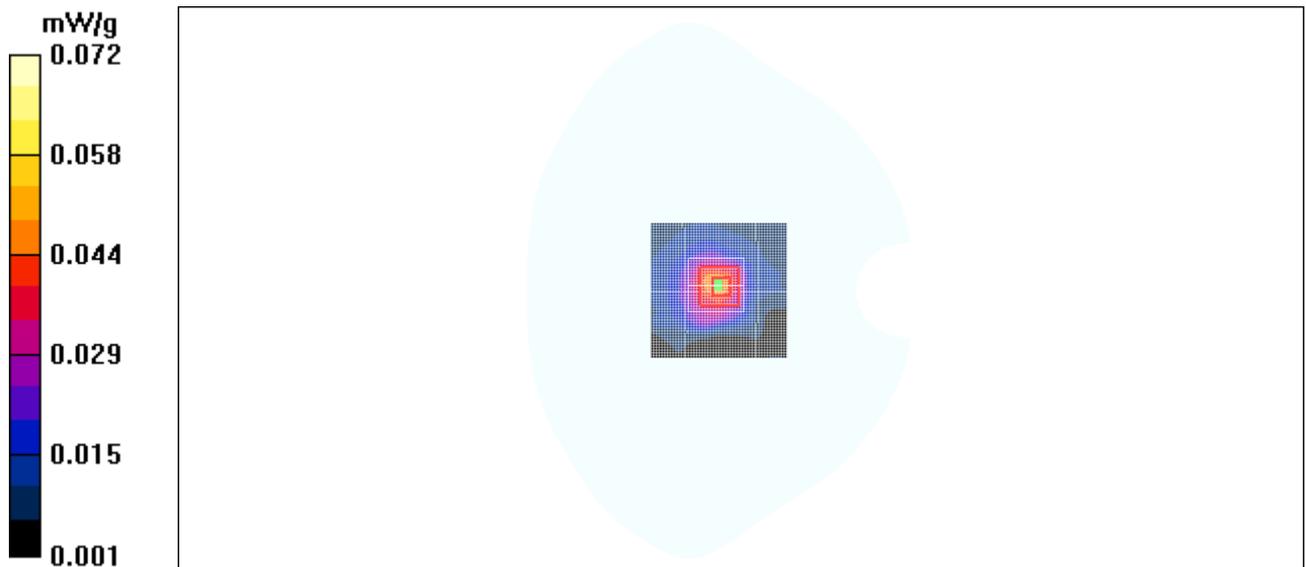


Figure 81 WCDMA Band V with BenQ Joybook R55V Test Position 2 Channel 4182

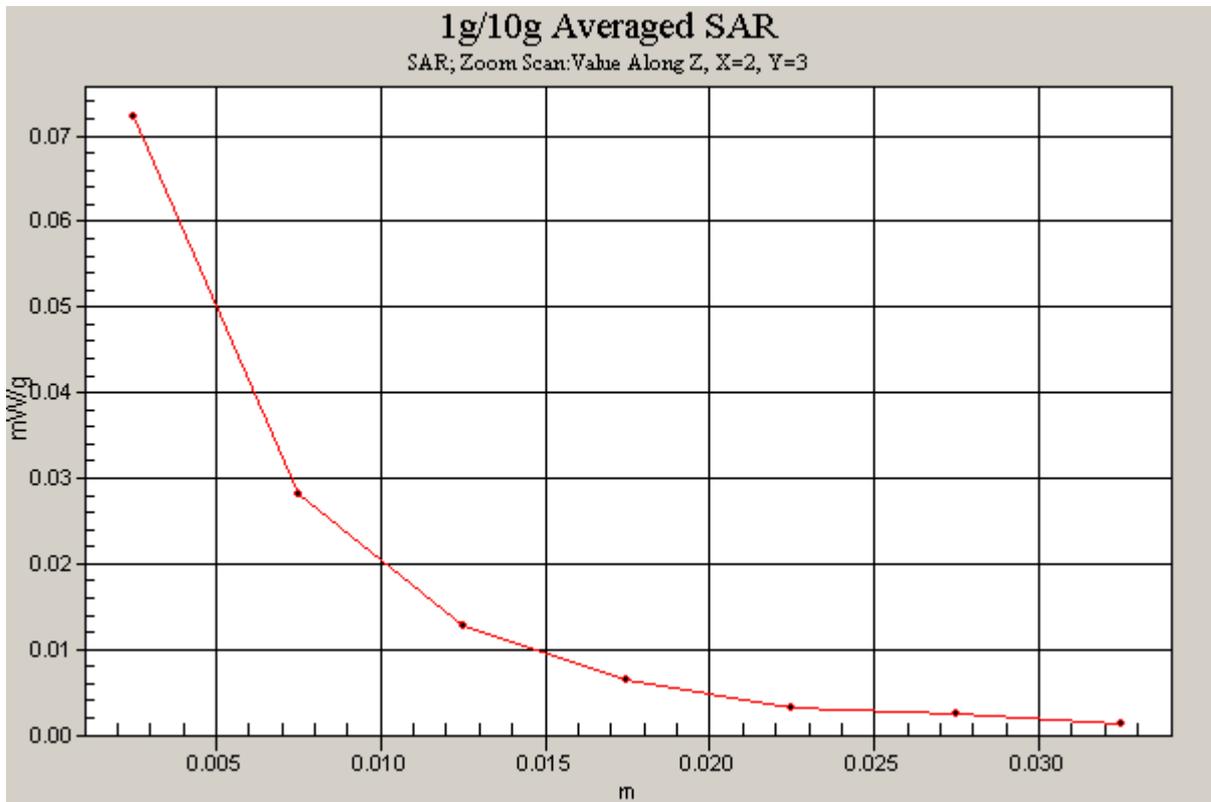


Figure 82 Z-Scan at power reference point (WCDMA Band V with BenQ Joybook R55V Test Position 2 Channel 4182)

Date/Time: 12/23/2008 5:54:32 AM

WCDMA Band V with BenQ Joybook R55V Test Position 3 Middle Frequency

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.986$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 3 Middle/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.412 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.9 V/m; Power Drift = 0.122 dB

Peak SAR (extrapolated) = 0.527 W/kg

SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.186 mW/g

Maximum value of SAR (measured) = 0.401 mW/g

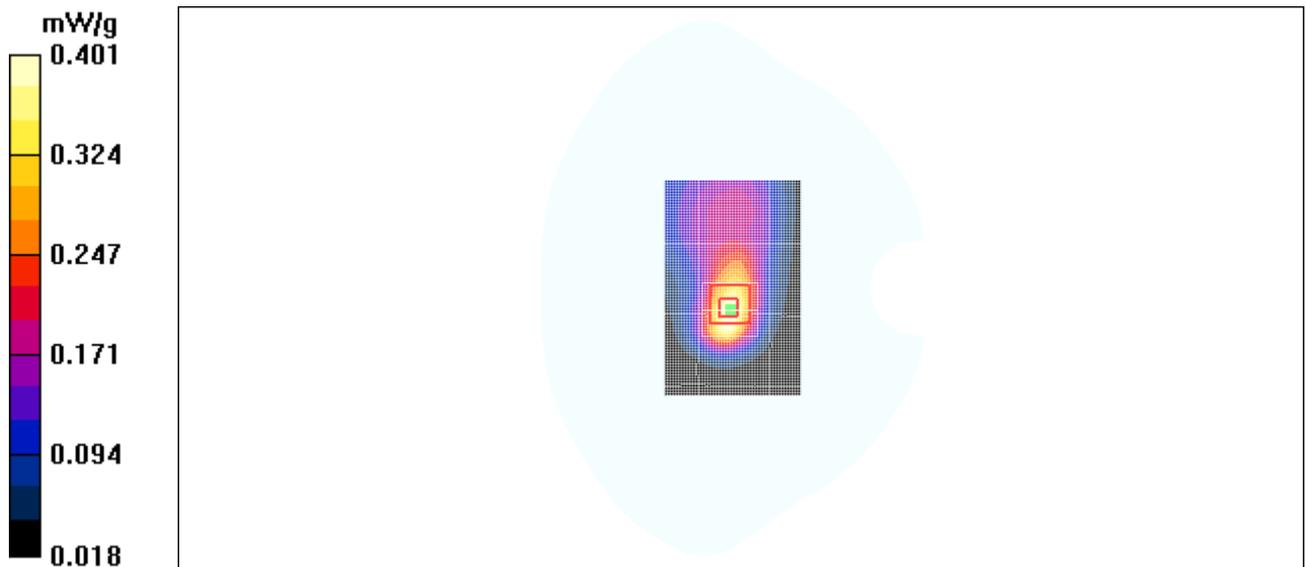


Figure 83 WCDMA Band V with BenQ Joybook R55V Test Position 3 Channel 4182

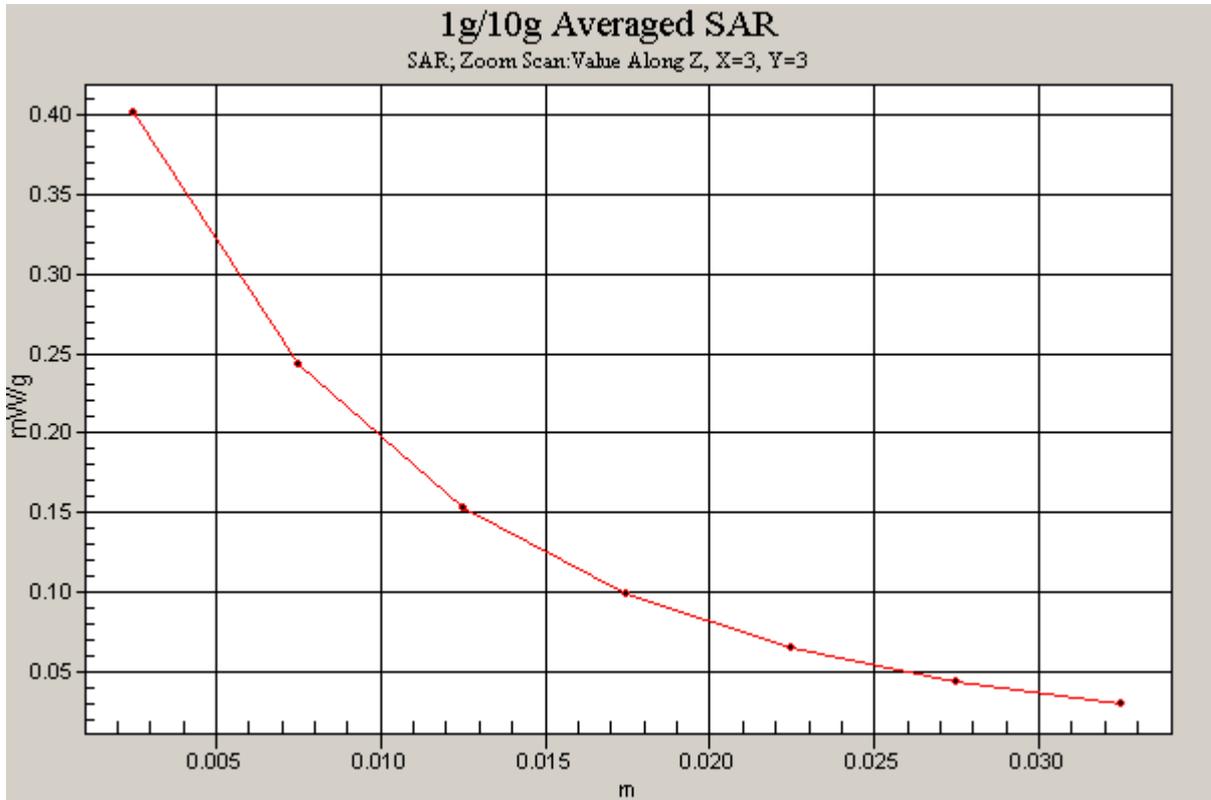


Figure 84 Z-Scan at power reference point (WCDMA Band V with BenQ Joybook R55V Test Position 3 Channel 4182)

Date/Time: 12/23/2008 4:24:59 AM

WCDMA Band V with IBM T61 Test Position 4 Middle Frequency

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.986$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;6

Test Position 4 Middle/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.363 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.297 mW/g; SAR(10 g) = 0.187 mW/g

Maximum value of SAR (measured) = 0.370 mW/g

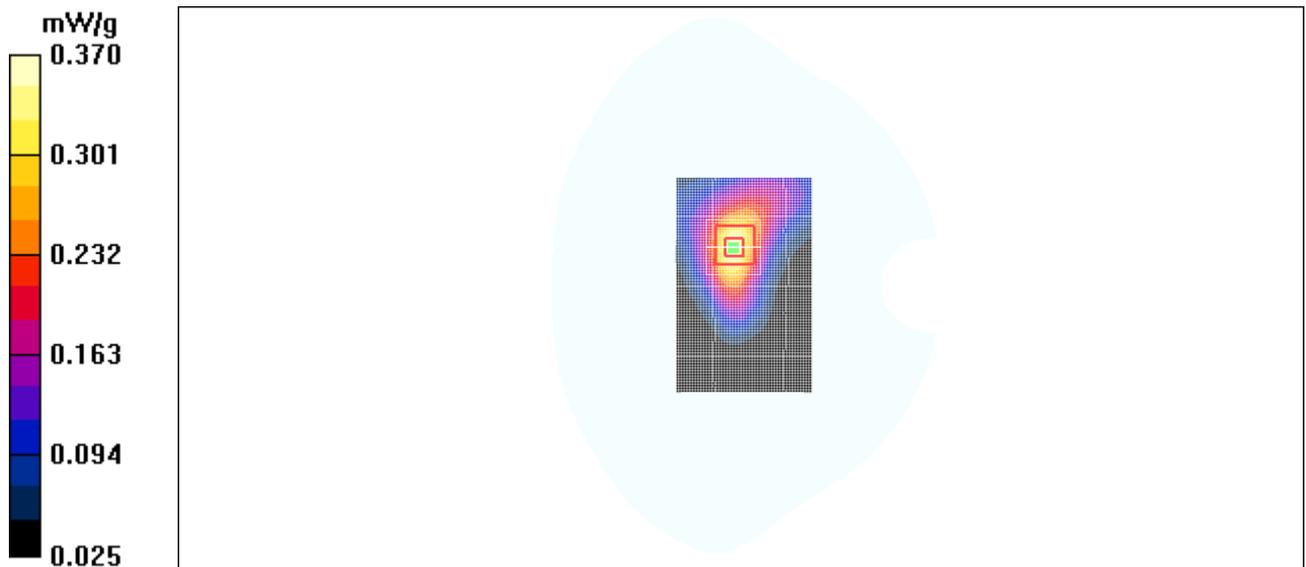


Figure 85 WCDMA Band V with IBM T61 Test Position 4 Channel 4182

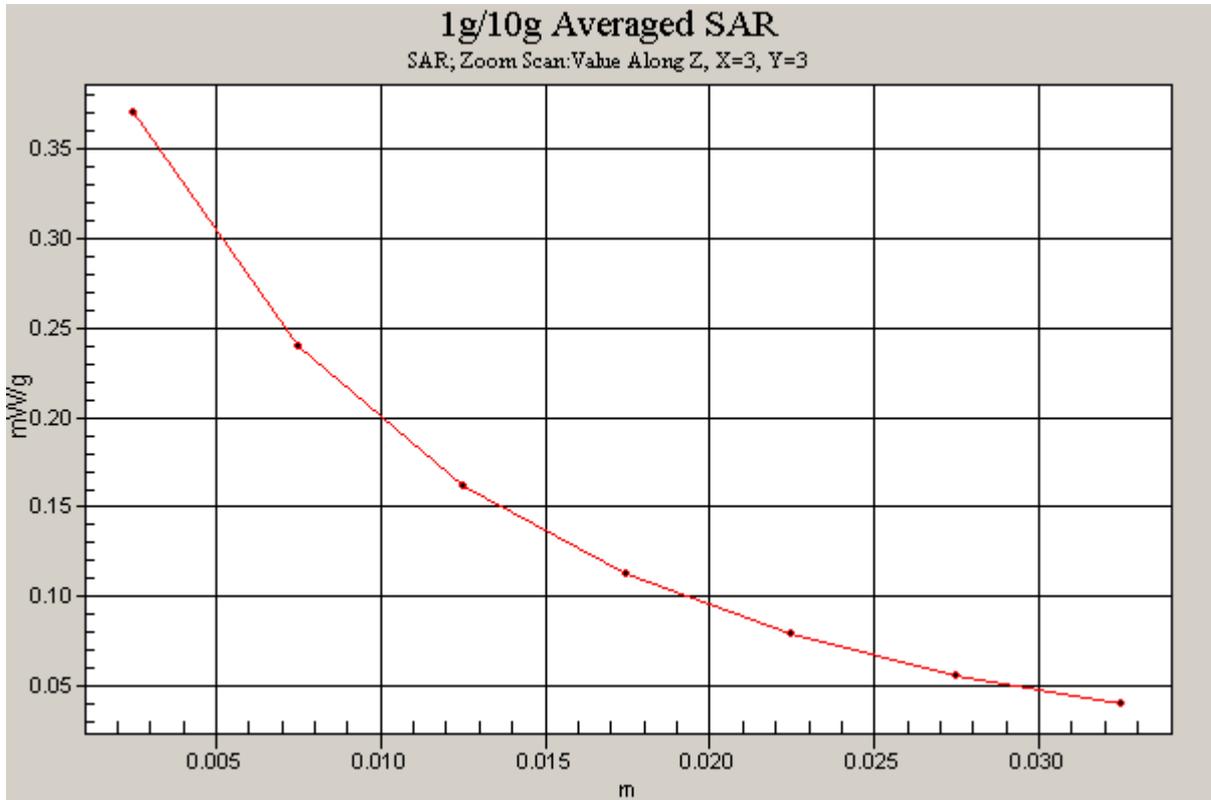


Figure 86 Z-Scan at power reference point (WCDMA Band V with IBM T61 Test Position 4 Channel 4182)

Date/Time: 12/23/2008 4:46:11 AM

WCDMA Band V with IBM T61 Test Position 5 Middle Frequency

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.986$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 5 Middle/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.347 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.5 V/m; Power Drift = 0.147 dB

Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.180 mW/g

Maximum value of SAR (measured) = 0.352 mW/g

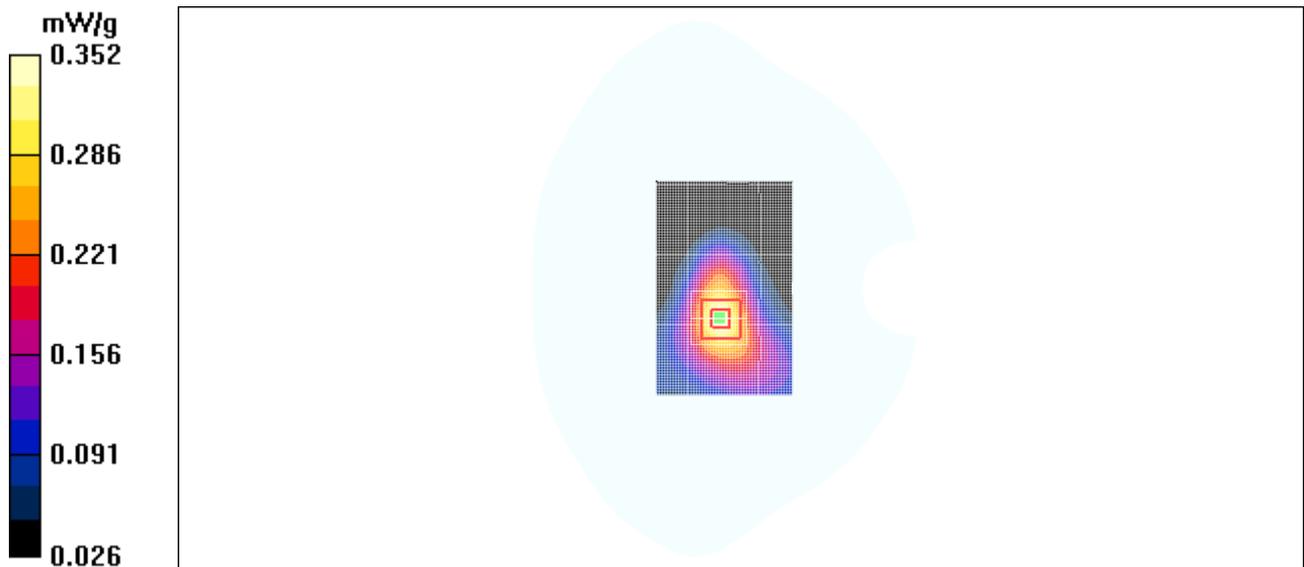


Figure 87 WCDMA Band V with IBM T61 Test Position 5 Channel 4182

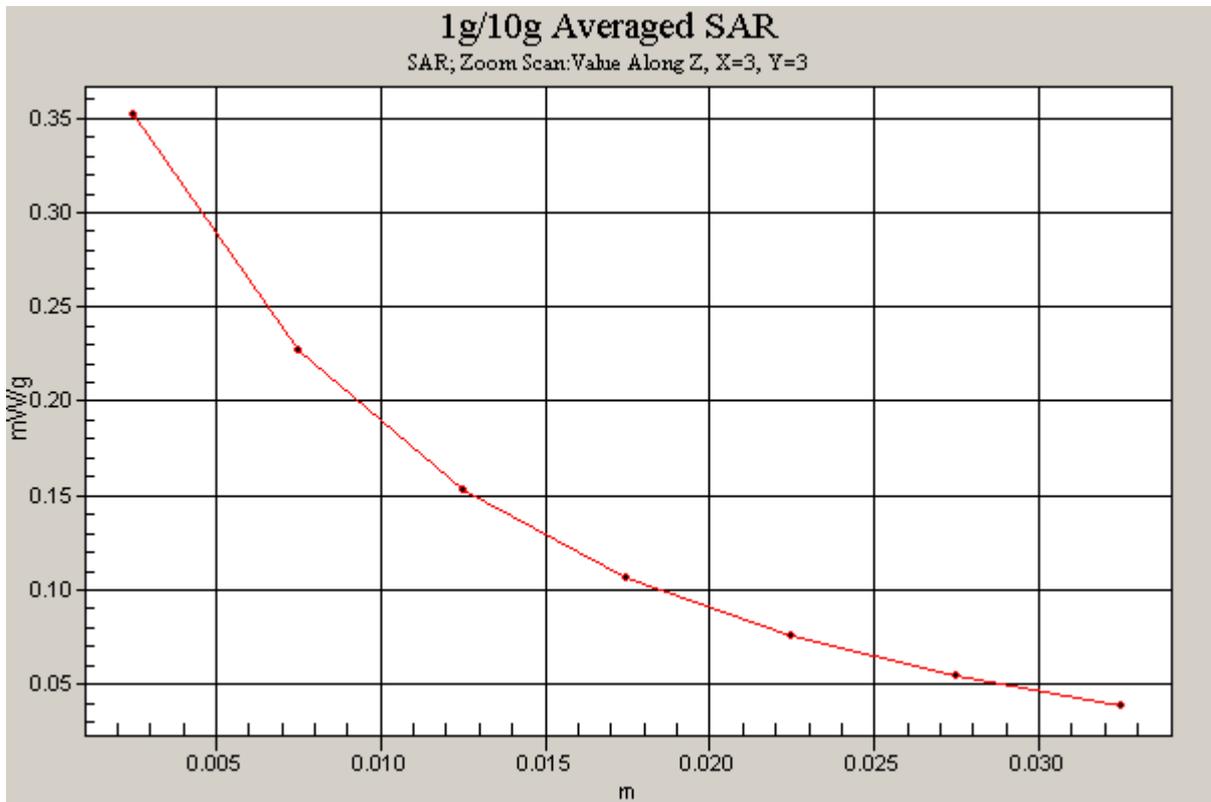


Figure 88 Z-Scan at power reference point (WCDMA Band V with IBM T61 Test Position 5 Channel 4182)

Date/Time: 12/25/2008 11:52:42 AM

WCDMA Band V HSDPA with BenQ Joybook R55V Test Position 1 Low Frequency

Communication System: WCDMA Band V+HSDPA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.974$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1);
- Electronics: DAE3 Sn536;

Test Position 1 Low/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.987 mW/g

Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.8 V/m; Power Drift = -0.186 dB

Peak SAR (extrapolated) = 0.927 W/kg

SAR(1 g) = 0.618 mW/g; SAR(10 g) = 0.404 mW/g

Maximum value of SAR (measured) = 0.752 mW/g

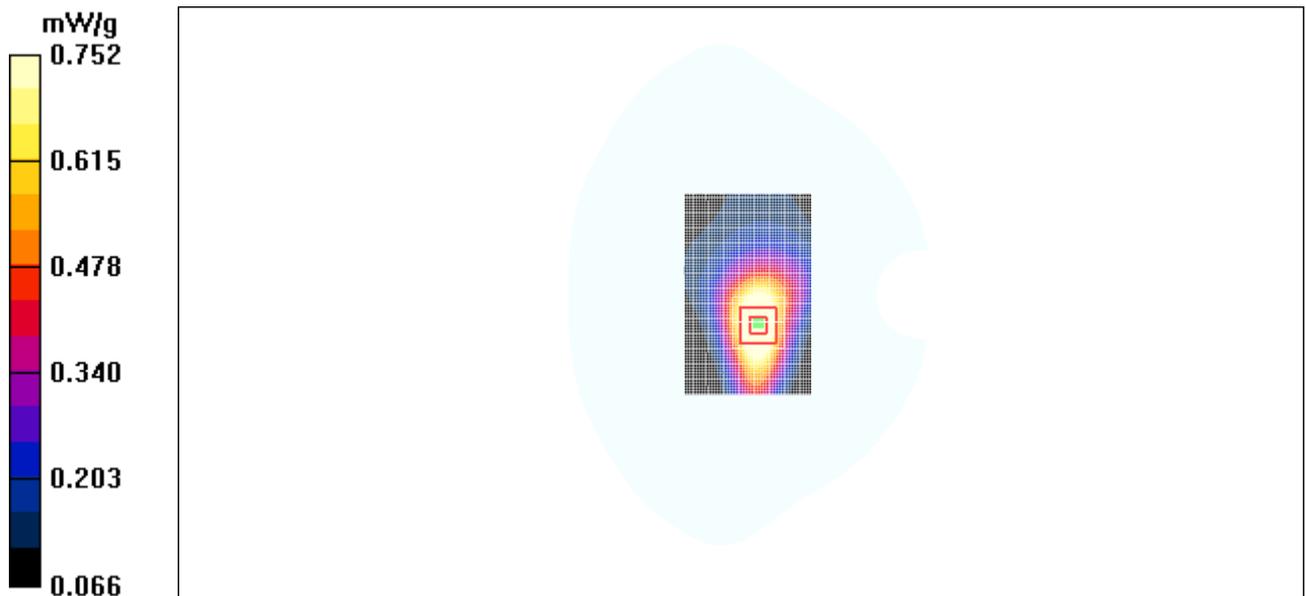


Figure 89 WCDMA Band V HSDPA with BenQ Joybook R55V Test Position 1 Channel 4132

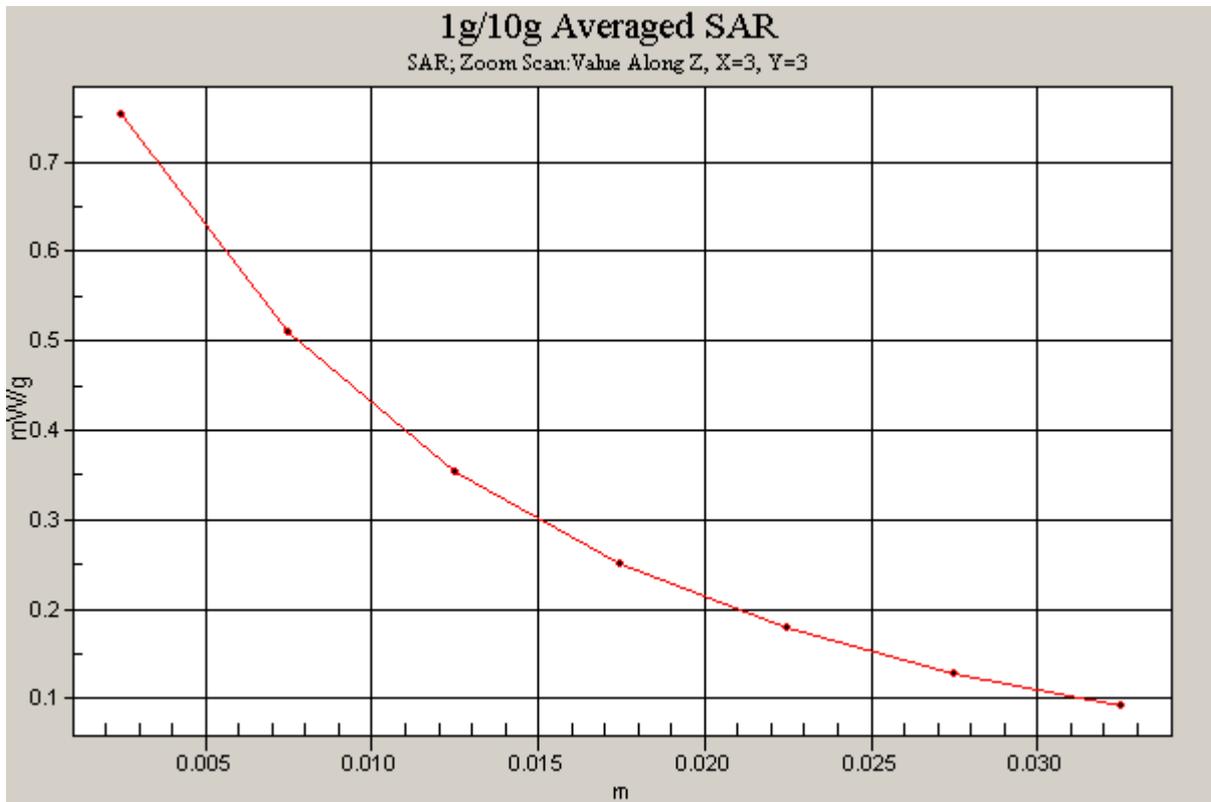


Figure 90 Z-Scan at power reference point (WCDMA Band V HSDPA with BenQ Joybook R55V
Test Position 1 Channel 4132)

ANNEX C: SYSTEM VALIDATION RESULTS

System Performance Check at 835 MHz

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d020

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.75$; $\rho = 1000$ kg/m³

Probe: EX3DV4 - SN3660; ConvF(9.19, 9.19, 9.19);

Electronics: DAE3 Sn536;

d=15mm, Pin=250mW/Area Scan (101x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.81 mW/g


d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.8 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 3.50 W/kg

SAR(1 g) = 2.3 mW/g; SAR(10 g) = 1.5 mW/g

Maximum value of SAR (measured) = 2.83 mW/g

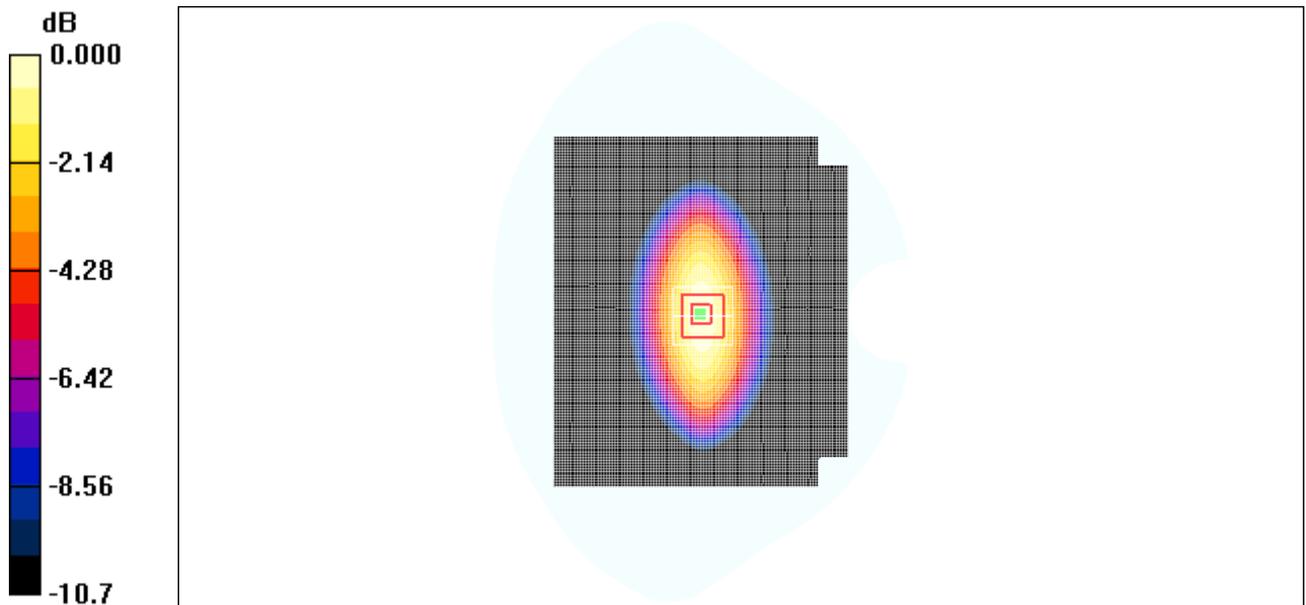

0 dB = 2.83mW/g

Figure 91 System Performance Check 835MHz 250mW

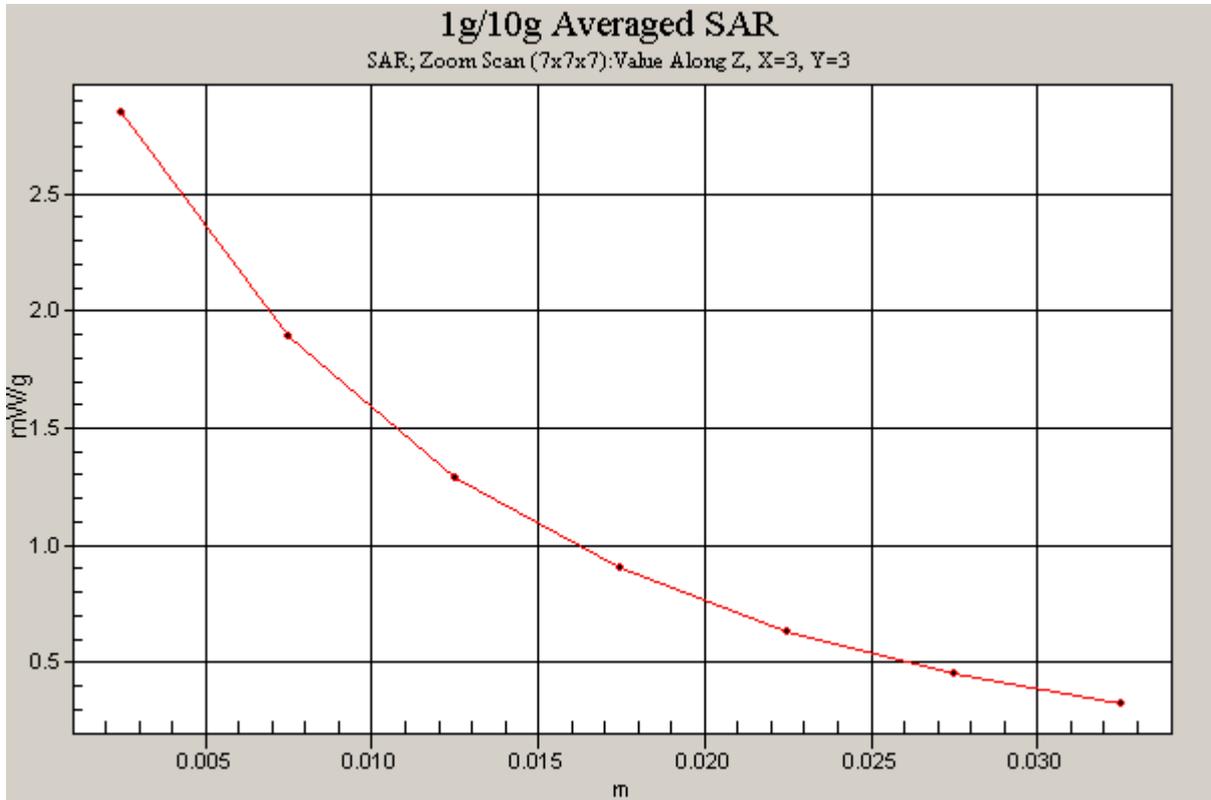


Figure 92 Z-Scan at power reference point (system validation at 835 MHz dipole)

System Performance Check at 1900 MHz

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d060

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Probe: EX3DV4 - SN3660; ConvF(7.35, 7.35, 7.35);

Electronics: DAE3 Sn536;

d=10mm, Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.4 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.1 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.74 mW/g; SAR(10 g) = 5.09 mW/g

Maximum value of SAR (measured) = 11.1 mW/g

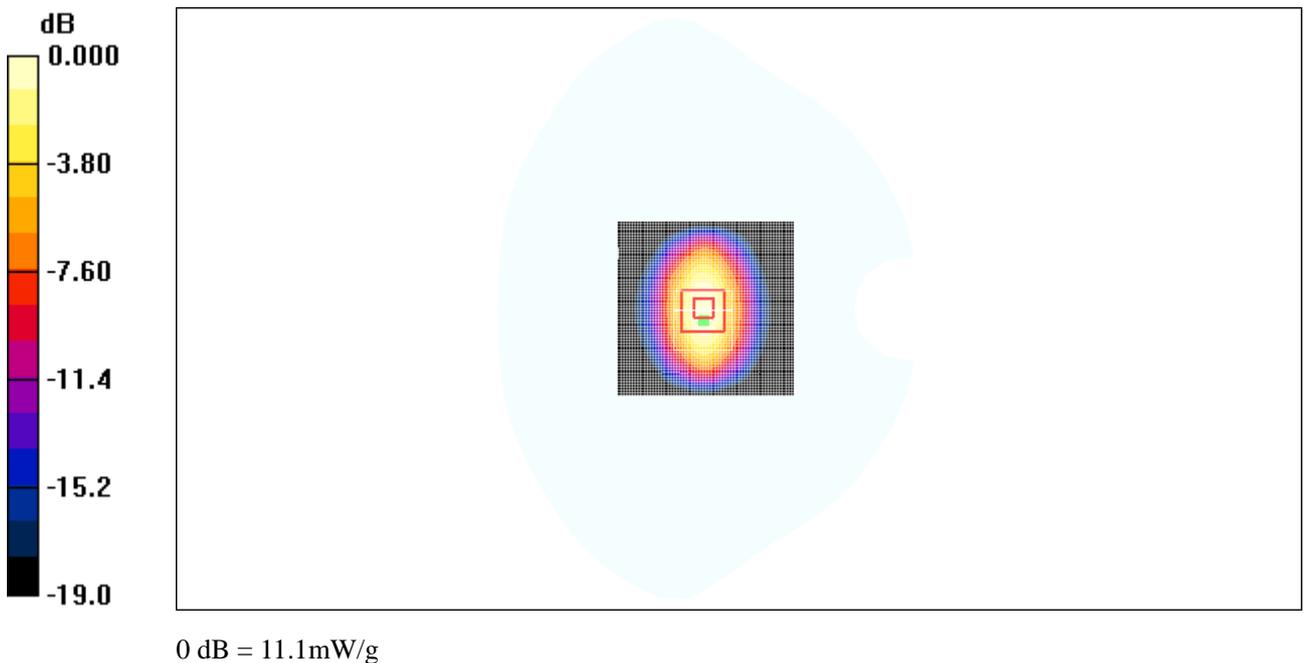


Figure 93 System Performance Check 1900MHz 250mW

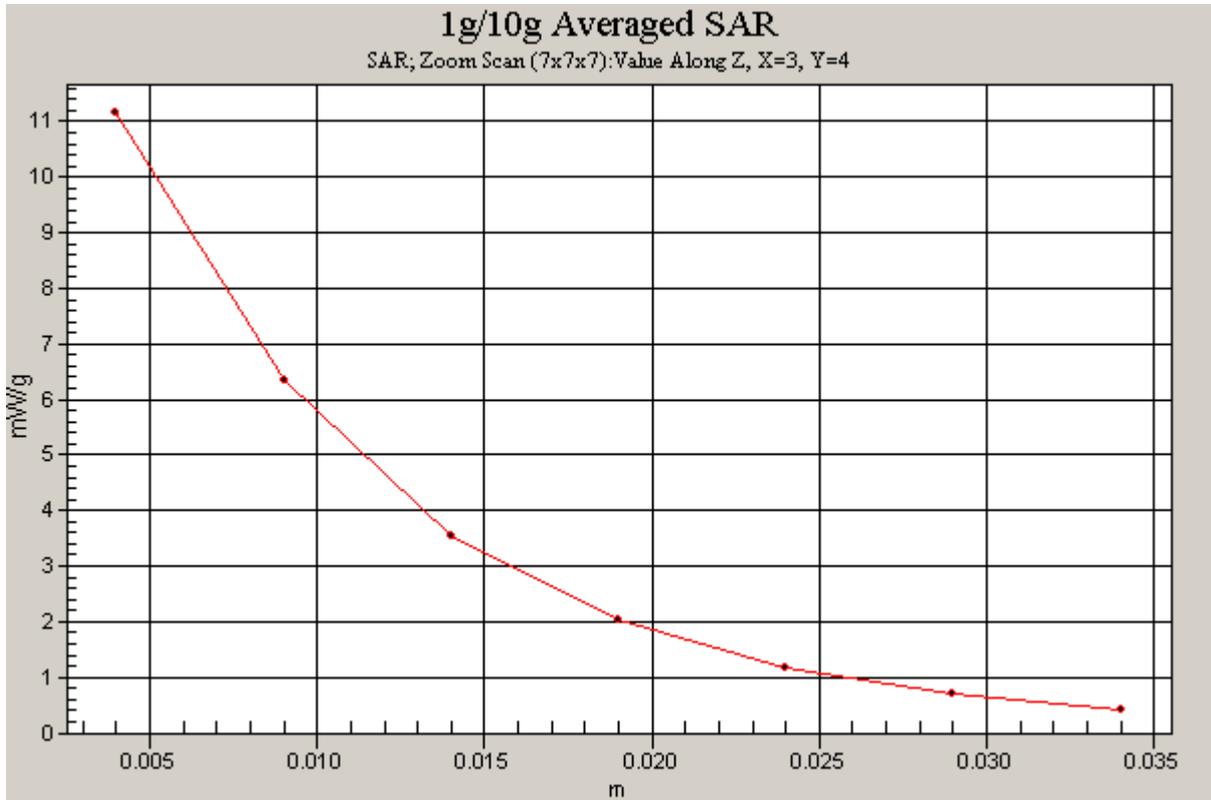


Figure 94 Z-Scan at power reference point (system validation at 1900 MHz dipole)

TA Technology (Shanghai) Co., Ltd. Test Report

No. RZA2008-1542

Page 131 of 166

ANNEX D: PROBE CALIBRATION CERTIFICATE

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA (Auden)**

Certificate No: **EX3-3660_Sep08**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3660**

Calibration procedure(s) **QA CAL-01.v6 and QA CAL-23.v3
Calibration procedure for dosimetric E-field probes**

Calibration date: **September 3, 2008**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41495277	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41498087	1-Apr-08 (No. 217-00788)	Apr-09
Reference 3 dB Attenuator	SN: S5054 (3c)	1-Jul-08 (No. 217-00865)	Jul-09
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-08 (No. 217-00787)	Apr-09
Reference 30 dB Attenuator	SN: S5129 (30b)	1-Jul-08 (No. 217-00866)	Jul-09
Reference Probe ES3DV2	SN: 3013	2-Jan-08 (No. ES3-3013_Jan08)	Jan-09
DAE4	SN: 660	3-Sep-07 (No. DAE4-660_Sep07)	Sep-08
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-07)	In house check: Oct-08

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Fin Bornholt	R&D Director	

Issued: September 3, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

EX3DV4 SN:3660

September 3, 2008

Probe EX3DV4

SN:3660

Manufactured: April 29, 2008
Calibrated: September 3, 2008

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

EX3DV4 SN:3660

September 3, 2008

DASY - Parameters of Probe: EX3DV4 SN:3660

Sensitivity in Free Space^A

Diode Compression^B

NormX	0.44 ± 10.1%	μV/(V/m) ²	DCP X	88 mV
NormY	0.42 ± 10.1%	μV/(V/m) ²	DCP Y	85 mV
NormZ	0.45 ± 10.1%	μV/(V/m) ²	DCP Z	89 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		2.0 mm	3.0 mm
SAR _{be} [%]	Without Correction Algorithm	9.5	5.2
SAR _{be} [%]	With Correction Algorithm	0.4	0.1

TSL 1750 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		2.0 mm	3.0 mm
SAR _{be} [%]	Without Correction Algorithm	7.6	3.8
SAR _{be} [%]	With Correction Algorithm	0.2	0.1

Sensor Offset

Probe Tip to Sensor Center 1.0 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).


^B Numerical linearization parameter: uncertainty not required.

EX3DV4 SN:3660

September 3, 2008

Frequency Response of E-Field

(TEM-Cell: ifi110 EXX, Waveguide: R22)

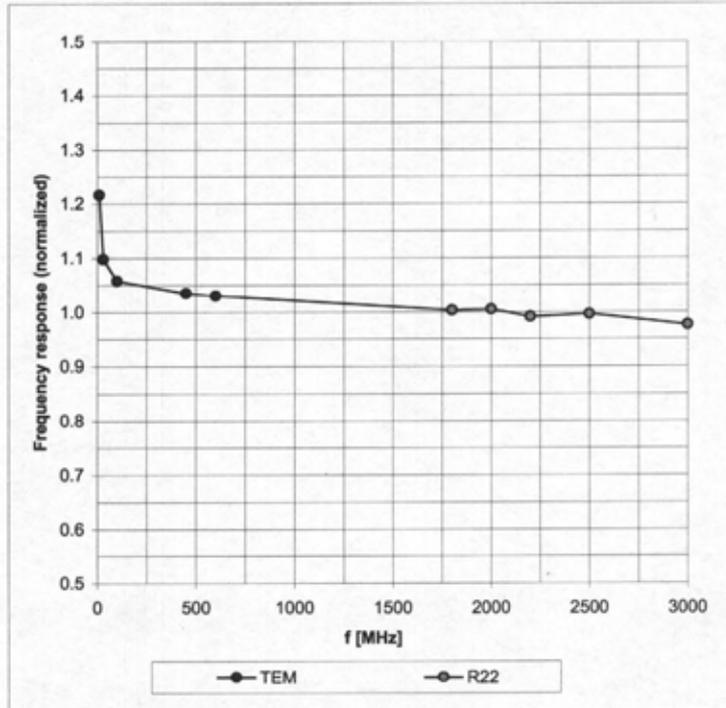

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)