



FCC SAR Compliance Test Report

Project Name: LTE USB Rotator
Model : E3276s-500
FCC ID : QISE3276S-500
Report No. : SYBH(Z-SAR) 023092012-2

	APPROVED	CHECKED	PREPARED
BY	<i>Liu Chunlin</i>	<i>Alvinway</i>	<i>Li wei</i>
DATE	2012-10-12	2012-10-12	2012-10-12

The test results of this test report relate exclusively to the item(s) tested , The HUAWEI does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of HUAWEI.

Reliability Laboratory of Huawei Technologies Co., Ltd.

Table of Contents

1	General Information	4
1.1	Statement of Compliance	4
1.2	RF exposure limits	4
1.3	EUT Description	5
1.3.1	General Description	6
1.3.2	LTE information Summary	7
1.4	Test specification(s)	8
1.5	Testing laboratory	8
1.6	Applicant and Manufacturer	8
1.7	Application details	8
1.8	Ambient Condition	8
2	SAR Measurement System	9
2.1	SAR Measurement Set-up	9
2.2	Test environment	10
2.3	Data Acquisition Electronics description	10
2.4	Probe description	11
2.5	Phantom description	12
2.6	Device holder description	12
2.7	Test Equipment List	13
3	SAR Measurement Procedure	14
3.1	Scanning procedure	14
3.2	Spatial Peak SAR Evaluation	15
3.3	Data Storage and Evaluation	16
4	System Verification Procedure	18
4.1	Tissue Verification	18
4.2	System Check	20
4.3	System check Procedure	21
5	Measurement Uncertainty Evaluation	22
5.1	Measurement uncertainty evaluation for SAR test	22
5.2	Measurement uncertainty evaluation for system check	23
6	SAR Test Configuration	24
6.1	GSM Test Configuration	24
6.2	UMTS Test Configuration	25
6.3	LTE Test Configurations	30
7	SAR Measurement Results	34
7.1	Conducted power measurements	34
7.1.1	Conducted power measurements GSM850	35
7.1.2	Conducted power measurements GSM1900	35
7.1.3	Conducted power measurements UMTS Band II	36
7.1.4	Conducted power measurements UMTS Band IV	36
7.1.5	Conducted power measurements UMTS Band V	37
7.1.6	Conducted power measurements LTE Band II	38
7.1.7	Conducted power measurements LTE Band IV	41
7.1.8	Conducted power measurements LTE Band V	44
7.1.9	Conducted power measurements LTE Band VII	46
7.2	SAR measurement Result	49
7.2.1	SAR measurement Result of GSM850	49
7.2.2	SAR measurement Result of GSM1900	50
7.2.3	SAR measurement Result of UMTS Band V	51
7.2.4	SAR measurement Result of UMTS Band IV	52
7.2.5	SAR measurement Result of UMTS Band II	53
7.2.6	Results overview of LTE Band II	54
7.2.7	Results overview of LTE Band IV	55
7.2.8	Results overview of LTE Band V	56
7.2.9	Results overview of LTE Band VII	57
7.3	simultaneous transmission SAR	65
	Appendix A. System Check Plots	66
	Appendix B. SAR Measurement Plots	66
	Appendix C. Calibration Certificate	66
	Appendix D. Photo documentation	66

※ ※ Modified History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2012-10-12	Li Wei

1 General Information

1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for E3276s-500 is as below Table 1.

Band	Position	Measured MAX SAR _{1g} (W/kg)	Conducted Power (dBm)	Tune-up Power (dBm)	Extrapolated Result (W/kg)
GSM850	Rear Side 5mm	1.010	29.24	30.50	1.350
GSM1900	Rear Side 5mm	0.955	25.76	26.50	1.132
UMTS Band V	Rear Side 5mm	0.737	21.83	22.90	0.943
UMTS Band IV	Rear Side 5mm	1.180	21.91	22.90	1.482
UMTS Band II	Rear Side 5mm	1.030	22.88	22.90	1.035
LTE Band II	Rear Side 5mm	1.060	22.78	23.50	1.251
LTE Band IV	Rear Side 5mm	1.060	20.76	22.00	1.410
LTE Band V	Front Side 5mm	0.650	22.60	23.50	0.800
SLTE Band VII	Rear Side 5mm	1.020	22.26	22.50	1.078

Table 1: Summary of test result

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits of 1.6 W/Kg as averaged over any 1 g tissue according to the FCC rule §2.1093, the ANSI/IEEE C 95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Health Canada’s Safety Code 6 and the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2003&IEEE Std 1528a-2005 and FCC OET Bulletin 65 Supplement C Edition 01-01-2001.

1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

1.3 EUT Description

Device Information:			
DUT Name:	LTE USB Rotator		
Type Identification:	E3276s-500		
FCC ID:	QISE3276S-500		
SN No.:	SAR1#:V7U01A9291400012 SAR2#:V7U01A9291400016		
Device Type :	portable deviceS		
Exposure Category:	uncontrolled environment / general population		
Hardware Version :	CH1E3276SM		
Software Version :	21.192.06.00.00		
Antenna Type :	internal antenna		
Device Operating Configurations:			
Supporting Mode(s)	GSM850/1900,UMTS Band II/IV/V,LTE Band II/IV/V/VII(tested)		
Test Modulation	GSM(GMSK), WCDMA(QPSK),LTE(QPSK,16QAM)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	UMTS Band II	1850-1910	1930-1990
	UMTS Band IV	1710-1755	2110-2155
	UMTS Band V	824-849	869-894
	LTE Band II	1850-1910	1930-1990
	LTE Band IV	1710-1755	2110-2155
	LTE Band V	824-849	869-894
	LTE Band VII	2500-2570	2620-2690
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
Power Class:	4, tested with power level 5(GSM850)		
	1, tested with power level 0(GSM1900)		
	3, tested with power control "all 1"(UMTS Band II)		
	3, tested with power control "all 1"(UMTS Band IV)		
	3, tested with power control "all 1"(UMTS Band V)		
	3, tested with power control all Max.(LTE Band II)		
	3, tested with power control all Max.(LTE Band IV)		
	3, tested with power control all Max.(LTE Band V)		
	3, tested with power control all Max.(LTE Band VII)		

Test Channels (low-mid-high):	128-190-251(GSM850)
	512-661-810 (GSM1900)
	9262-9400-9538 (UMTS Band II)
	1312-1413-1513 (UMTS Band IV)
	4132-4182-4233 (UMTS Band V)
	18625-18900-19175(LTE Band II BW=5MHz)
	18650-18900-19150(LTE Band II BW=10MHz)
	18675-18900-19125(LTE Band II BW=15MHz)
	18700-18900-19100(LTE Band II BW=20MHz)
	19975-20175-20375(LTE Band IV BW=5MHz)
	20000-20175-20350(LTE Band IV BW=10MHz)
	20025-20175-20325(LTE Band IV BW=15MHz)
	20050-20175-20300(LTE Band IV BW=20MHz)
	20425-20525-20625(LTE Band V BW=5MHz)
	20450-20525-20600(LTE Band V BW=10MHz)
	20775-21100-21425(LTE Band VII BW=5MHz)
	20800-21100-21400(LTE Band VII BW=10MHz)
20850-21100-21350(LTE Band VII BW=20MHz)	

Table 3:Device information and operating configuration

1.3.1 General Description

E3276s-500 USB Rotator is subscriber equipment in the LTE/DC-HSPA+/HSUPA/HSDPA/WCDMA/EDGE/GPRS/GSM system. LTE supports Band II/IV/V/VII, but Band II/IV/V/VII testing dates included in this reports, DC-HSPA+/HSUPA/HSDPA/WCDMA supports Band I/II/IV/V, but only Band II/IV/V test dates included in this report, EDGE/GPRS/GSM Supports GSM 850/900/1800/1900, but only GSM 850 and 1900 test date included in this report. E3276s-500 implement such functions as RF signal receiving/transmitting, LTE/HSPA+/WCDMA and EDGE/GPRS/GSM protocol processing, data service etc. Externally it provides USB interface (to connect to the notebook etc.), USIM card interface and Micro SD card interface. E3276s-500 has an internal antenna as default.

1.3.2 LTE information Summary

Items	Device Operating Configurations for LTE	Remark
1	Frequency Range of each LTE transmission band	Refer to table 3
2	Channel Bandwidths	Band II/IV(5MHz,10MHz,15MHz,20MHz), Band V(5 MHz,10MHz) Band VII(5MHz,10MHz,20MHz)
3	H,M,L channel numbers and frequencies	Refer to table 3
4a	UE Category	3
4b	Modulations Supported in UL	QPSK, 16QAM
5	Description of LTE Tx and Ant. Implementation	Transmit and Receiver from base station
6	Identify the LTE data requirements in each operating mode and exposure condition	Body SAR is required.
7	LTE MPR Permanently implement per 3GPP TS36.101 section 6.2.3~6.2.5?(manufacturer attestation to be provided)	Yes
8	Conducted power table provided for 1RB(Low and high offset),50%RB(centered),100%RB	Refer to the RF Output Power Table
9~10	Non-LTE operating Modes and Band	Refer to table 3
11	Simultaneous Tx Conditions	NO
12	Power Reduction used for SAR Compliance	NO
13	Supporting descriptions for power reduction	NO
14	When appropriate, include a SAR test plan proposal with respect to the above	Not Applicable
15	If applicable, include preliminary SAR test data and/or supporting information in laboratory testing inquiries to address specific issues and concerns or for requesting further test reduction considerations appropriate for the device; for example,simultaneous transmission configurations	Not Applicable

Table 4: LTE information Summary per FCC KDB 941225 D05

1.4 Test specification(s)

ANSI Std C95.1 – 1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.(IEEE Std C95.1 – 1991)
IEEE Std 1528-2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE Std 1528a-2005	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Amendment 1: CAD File for Human Head Model (SAM Phantom)
OET Bulletin No. 65, Supplement C Edition 01-01– 2001	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields---Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions
Canada's Safety Code 6	Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz (99-EHD-237)
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 4 of March 2010)
KDB941225 D01	SAR test for 3G devices v02
KDB941225 D03	SAR Test Reduction GSM GPRS EDGE vo1
KDB941225 D05	SAR for LTE Devices v01
KDB447498 D02	SAR Procedures for Dongle Xmtr v02
KDB450824 D01	SAR Probe Calibration and System Verification
KDB450824 D02	Dipole SAR system check Verification v01

1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	Zone K3,Huawei Industrial Base, Bantian Industry Area, Longgang District, Shenzhen, Guangdong, China
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 ; A2LA Registration number: 2174.01

1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.7 Application details


Start Date of test	2012-09-18
End Date of test	2012-09-25

1.8 Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2 SAR Measurement System

2.1 SAR Measurement Set-up

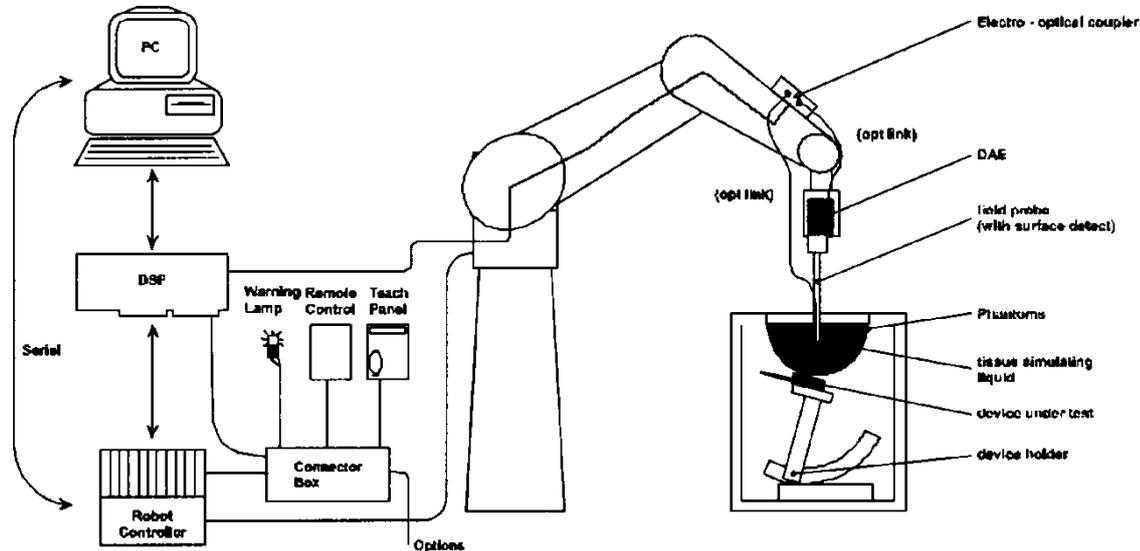

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows XP.
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

2.2 Test environment

The DASY4 measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m³, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m² array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.

The system allows the measurement of SAR values larger than 0.005 mW/g.

2.3 Data Acquisition Electronics descriptiona

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.


DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	

2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor (± 2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

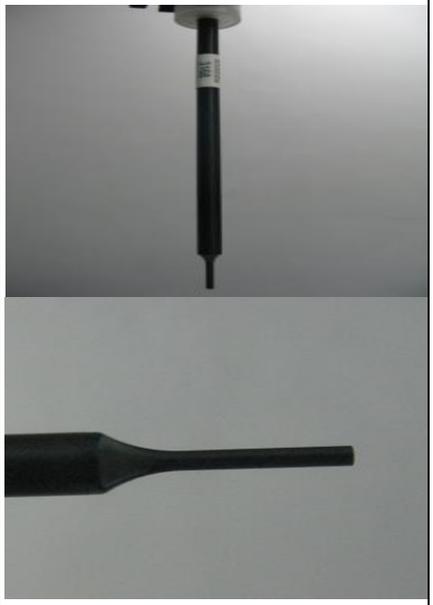Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 6 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in HSL (rotation normal to probe axis)	
Dynamic range	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm Tip length: 20 mm Body diameter: 12 mm Tip diameter: 2.5 mm Distance from probe tip to dipole centers: 1.0 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	


2.5 Phantom description

SAM Twin Phantom

Shell Thickness	2mm +/- 0.2 mm; The ear region: 6mm	
Filling Volume	Approximately 30 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

ELI4 Phantom

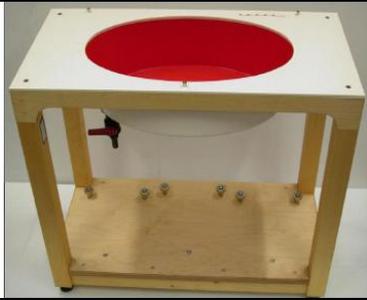Shell Thickness	2mm +/- 0.2 mm	
Filling Volume	Approximately 30 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Flat phantom	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

2.6 Device holder description

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment
 Devices used during the test described are marked

	Manufacturer	Device	Type	Serial number	Date of last calibration)*
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3736	2012-04-26
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3744	2012-07-27
<input checked="" type="checkbox"/>	SPEAG	835 MHz Dipole	D835V2	4d126	2011-11-07
<input checked="" type="checkbox"/>	SPEAG	1800 MHz Dipole	D1800V2	2d184	2011-03-08
<input checked="" type="checkbox"/>	SPEAG	1900 MHz Dipole	D1900V2	5d143	2011-09-26
<input type="checkbox"/>	SPEAG	2000 MHz Dipole	D2000V2	1052	2011-03-10
<input type="checkbox"/>	SPEAG	2300 MHz Dipole	D2300V2	1016	2011-11-22
<input type="checkbox"/>	SPEAG	2450 MHz Dipole	D2450V2	860	2011-03-08
<input checked="" type="checkbox"/>	SPEAG	2600 MHz Dipole	D2600V2	1021	2011-11-21
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	852	2011-11-16
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	851	2012-07-25
<input checked="" type="checkbox"/>	SPEAG	Software	DASY 5	N/A	N/A
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM1	TP-1475	N/A
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM2	TP-1474	N/A
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM3	TP-1597	N/A
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM4	TP-1620	N/A
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1038	N/A
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1111	N/A
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	113989	2012-06-07
<input checked="" type="checkbox"/>	R & S	WideBand Radio Communication Tester	CMW 500	112936	2012-08-24
<input checked="" type="checkbox"/>	Agilent)*	Network Analyser	E5071B	MY42404956	2012-02-14
<input checked="" type="checkbox"/>	Agilent	Dielectric Probe Kit	85070E	2484	N/A
<input checked="" type="checkbox"/>	Agilent	Signal Generator	N5181A	MY47420989	2012-02-14
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA0746001	N/A
<input checked="" type="checkbox"/>	Agilent	Power Meter	E4417A	MY45101339	2012-02-14
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E9321A	MY44420359	2012-02-14

Note: All the test equipments are calibrated once a year, except the dipoles, which are calibrated every three years. Moreover, we have self-calibration every year to the dipoles.

- 1) Per KDB 450824 D02 requirements for dipole calibration, Huawei SAR lab has adopted three years calibration interval. But each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.
 - a) There is no physical damage on the dipole;
 - b) System check with specific dipole is within 10% of calibrated value;
 - c) Return-loss is within 10% of calibrated measurement;
 - d) Impedance is within 5Ω from the previous measurement.
- 2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

3 SAR Measurement Procedure

3.1 Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The reference and drift measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. +/- 5 %.
- The surface check measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The area scan measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension. If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in Appendix B.
- A 7x7x7 zoom scan measures the field in a volume around the 2D peak SAR value acquired in the previous coarse scan. This is a fine 7x7 grid where the robot additionally moves the probe in 7 steps along the z-axis away from the bottom of the Phantom. Grid spacing for the cube measurement is 5 mm in x and y-direction and 5 mm in z-direction. DASY5 is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 7 x 7 x 7 points. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting Graph Evaluated.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

3.3 Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension DAE4. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a ₁₀ , a ₁₁ , a ₁₂
	- Conversion factor	ConvF _i
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with	V _i	= compensated signal of channel i	(i = x, y, z)
	U _i	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field (DASY parameter)	
	dcp _i	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:
$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

H-field probes:
$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$$

- with V_i = compensated signal of channel i (i = x, y, z)
- $Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes
- ConvF = sensitivity enhancement in solution
- a_{ij} = sensor sensitivity factors for H-field probes
- f = carrier frequency [GHz]
- E_i = electric field strength of channel i in V/m
- H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

- with SAR = local specific absorption rate in mW/g
- E_{tot} = total field strength in V/m
- σ = conductivity in [mho/m] or [Siemens/m]
- ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

- with P_{pwe} = equivalent power density of a plane wave in mW/cm²
- E_{tot} = total electric field strength in V/m
- H_{tot} = total magnetic field strength in A/m

4 System Verification Procedure

4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Body Tissue					
	450	835	1800	1900	2450	2600
Frequency Band (MHz)	450	835	1800	1900	2450	2600
Water	51.16	52.4	69.91	71.88	73.2	70.04
Salt (NaCl)	1.49	1.40	0.13	0.39	0.04	0.1
Sugar	46.78	45.0	0.0	0.0	0.0	0.0
HEC	0.52	1.0	0.0	0.0	0.0	0.0
Bactericide	0.05	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.44	26.7	29.5

Table 5: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M Ω + resistivity
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r (+/-5%)	σ (S/m) (+/-5%)	ϵ_r	σ (S/m)		
835B	825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	55.12	0.949	21.4°C	2012-09-18
	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	55.06	0.953		
	850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	54.94	0.969		
835B	825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.88	0.971	21.4°C	2012-09-20
	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.80	0.981		
	850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	54.65	0.995		
835B	825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.93	0.970	21.4°C	2012-09-21
	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.87	0.974		
	850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	54.77	0.991		
1800B	1710	53.50 (50.83~56.18)	1.46 (1.39~1.53)	52.64	1.432	21.4°C	2012-09-21
	1730	53.50 (50.83~56.18)	1.48 (1.41~1.55)	52.56	1.452		
	1750	53.40 (50.73~56.07)	1.49 (1.42~1.56)	52.48	1.467		
	1800	53.30 (50.64~55.97)	1.52 (1.44~1.60)	52.27	1.519		
1800B	1710	53.50 (50.83~56.18)	1.46 (1.39~1.53)	54.08	1.479	21.4°C	2012-09-23

	1730	53.50 (50.83~56.18)	1.48 (1.41~1.55)	53.94	1.498		
	1750	53.40 (50.73~56.07)	1.49 (1.42~1.56)	53.81	1.517		
	1800	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.53	1.562		
1900B	1850	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.91	1.466	21.4°C	2012-09-20
	1880	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.79	1.493		
	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.84	1.524		
	1910	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.82	1.529		
1900B	1850	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.63	1.471	21.4°C	2012-09-21
	1880	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.57	1.503		
	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.53	1.524		
	1910	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.52	1.535		
2600B	2510	52.62 (49.99~55.25)	2.03 (1.93~2.13)	52.82	2.016	21.4°C	2012-09-24
	2535	52.59 (49.96~55.22)	2.07 (1.97~2.17)	52.55	2.047		
	2550	52.57 (49.94~55.20)	2.09 (1.99~2.19)	52.63	2.066		
	2600	52.50 (49.88~55.13)	2.16 (2.05~2.27)	52.38	2.130		
ϵ_r = Relative permittivity, σ = Conductivity							

Table 6: Measured Tissue Parameter

Note: 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2) KDB 450824 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

4.2 System Check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests (Graphic Plot(s) see Appendix A).


System Check	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)		
D835V2 Body	9.54 (8.59~10.49)	6.29 (5.66~6.92)	10.24	6.68	21.4°C	2012-09-18
D835V2 Body	9.54 (8.59~10.49)	6.29 (5.66~6.92)	10.00	6.52	21.4°C	2012-09-20
D835V2 Body	9.54 (8.59~10.49)	6.29 (5.66~6.92)	10.04	6.56	21.4°C	2012-09-21
D1800V2 Body	38.80 (34.92~42.68)	20.40 (18.36~22.44)	38.92	20.40	21.4°C	2012-09-21
D1800V2 Body	38.80 (34.92~42.68)	20.40 (18.36~22.44)	39.72	20.52	21.4°C	2012-09-23
D1900V2 Body	41.40 (37.26~45.54)	21.80 (19.62~23.98)	40.00	20.68	21.4°C	2012-09-20
D1900V2 Body	41.40 (37.26~45.54)	21.80 (19.62~23.98)	41.60	20.44	21.4°C	2012-09-21
D2600V2 Body	55.60 (50.04~61.16)	24.90 (22.41~27.39)	56.00	24.36	21.4°C	2012-09-24

Table 7: System Check Results

4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

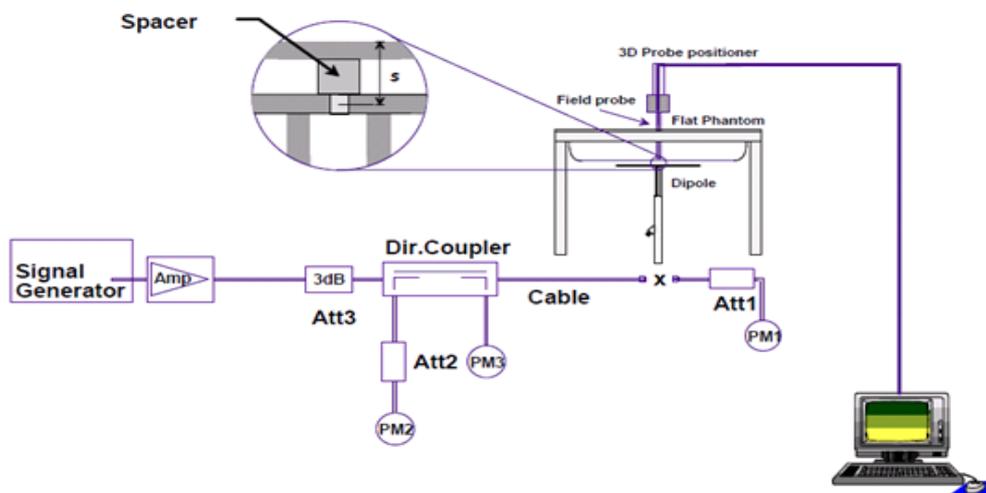

5 Measurement Uncertainty Evaluation

5.1 Measurement uncertainty evaluation for SAR test

The overall combined measurement uncertainty of the measurement system is $\pm 10.9\%$ ($K=1$).

The expanded uncertainty ($k=2$) is assessed to be $\pm 21.9\%$

This measurement uncertainty budget is suggested by IEEE P1528 and determined by Schmid & Partner Engineering AG. The breakdown of the individual uncertainties is as follows:

Error Sources	Uncertainty Value	Probability Distribution	Divisor	c_i 1g	c_i 10g	Standard Uncertainty 1g	Standard Uncertainty 10g	v_i^2 or v_{eff}
Measurement System								
Probe calibration	$\pm 6.0\%$	Normal	1	1	1	$\pm 6.0\%$	$\pm 6.0\%$	∞
Axial isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9\%$	$\pm 1.9\%$	∞
Hemispherical isotropy	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9\%$	$\pm 3.9\%$	∞
Spatial resolution	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
Boundary effects	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Probe linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
System detection limits	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Readout electronics	$\pm 0.3\%$	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
Response time	$\pm 0.8\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$	∞
Integration time	$\pm 2.6\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5\%$	$\pm 1.5\%$	∞
RF ambient conditions	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Probe positioner	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.2\%$	$\pm 0.2\%$	∞
Probe positioning	$\pm 2.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Max. SAR evaluation	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Test Sample Related								
Device positioning	$\pm 2.9\%$	Normal	1	1	1	$\pm 2.9\%$	$\pm 2.9\%$	145
Device holder uncertainty	$\pm 3.6\%$	Normal	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	5
Power drift	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	∞
Phantom and Set-up								
Phantom uncertainty	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
Liquid conductivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
Liquid conductivity (meas.)	$\pm 2.5\%$	Normal	1	0.64	0.43	$\pm 1.6\%$	$\pm 1.1\%$	∞
Liquid permittivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
Liquid permittivity (meas.)	$\pm 2.5\%$	Normal	1	0.6	0.49	$\pm 1.5\%$	$\pm 1.2\%$	∞
Combined Uncertainty	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					$\pm 10.9\%$	$\pm 10.7\%$	387
Expanded Std. Uncertainty	$u_e = 2u_c$	Normal		K=2		$\pm 21.9\%$	$\pm 21.4\%$	

Table 8: Measurement uncertainties

5.2 Measurement uncertainty evaluation for system check

The overall combined measurement uncertainty of the measurement system is $\pm 9.5\%$ ($K=1$).

The expanded uncertainty ($k=2$) is assessed to be $\pm 18.9\%$

This measurement uncertainty budget is suggested by IEEE P1528 and determined by Schmid & Partner Engineering AG. The breakdown of the individual uncertainties is as follows:

Error Sources	Uncertainty Value	Probability Distribution	Divisor	c_i 1g	c_i 10g	Standard Uncertainty 1g	Standard Uncertainty 10g	v_i^2 or v_{eff}
Measurement System								
Probe calibration	$\pm 6.0\%$	Normal	1	1	1	$\pm 6.0\%$	$\pm 6.0\%$	∞
Axial isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
Hemispherical isotropy	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 0.0\%$	$\pm 0.0\%$	∞
Boundary effects	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Probe linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
System detection limits	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Readout electronics	$\pm 0.3\%$	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
Response time	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
Integration time	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
RF ambient conditions	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Probe positioner	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.2\%$	$\pm 0.2\%$	∞
Probe positioning	$\pm 2.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Max. SAR evaluation	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Dipole								
Deviation of experimental dipole	$\pm 5.5\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 3.2\%$	$\pm 3.2\%$	∞
Dipole axis to liquid distance	$\pm 2.0\%$	Rectangular	1	1	1	$\pm 1.2\%$	$\pm 1.2\%$	∞
Power drift	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
Phantom and Set-up								
Phantom uncertainty	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
Liquid conductivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
Liquid conductivity (meas.)	$\pm 2.5\%$	Normal	1	0.64	0.43	$\pm 1.6\%$	$\pm 1.1\%$	∞
Liquid permittivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
Liquid permittivity (meas.)	$\pm 2.5\%$	Normal	1	0.6	0.49	$\pm 1.5\%$	$\pm 1.2\%$	∞
Combined Uncertainty	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					$\pm 9.5\%$	$\pm 9.2\%$	
Expanded Std. Uncertainty	$u_e = 2u_c$	Normal		K=2		$\pm 18.9\%$	$\pm 18.4\%$	

Table 9: Measurement uncertainties

6 SAR Test Configuration

6.1 GSM Test Configuration

SAR tests for GSM850/1900, a communication link is set up with a base station by air link. Using CMU200 the power lever is set to “5”and “0” in SAR of GSM850 and GSM1900.The tests in the band of GSM850/1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot.

The allowed power reduction in the multi-slot configuration is as following:

Number of timeslots in uplink assignment		Reduction of maximum output power, (dB)		
Band	Time Slots	GPRS (GMSK)	EGPRS (GMSK)	EGPRS (8PSK)
GSM850	1 TX slot	0	0	0
	2 TX slots	2	2	0.5
	3 TX slots	3	3	2.5
	4 TX slots	5	5	4.5
GSM1900	1 TX slot	0	0	0
	2 TX slots	2	2	0.5
	3 TX slots	4	4	2.5
	4 TX slots	6	6	4.5

Table 10: The allowed power reduction in the multi-slot configuration of GSM

6.2 UMTS Test Configuration

1) RMC

As the SAR body tests for UMTS Band V/IV/ II, we established the radio link through call processing. The maximum output power were verified on high, middle and low channels for each test band according to 3GPP TS 34.121 with the following configuration:

- 1) 12.2kbps RMC, 64,144,384 kbps RMC with TPC set to 'all 1'.
- 2) Test loop Mode 1.

For the output power, the configurations for the DPCCH and DPDCH₁ are as followed (EUT do not support the DPDCH_{2-n})

	Channel Bit Rate (kbps)	Channel Symbol Rate (ksps)	Spreading Factor	Spreading Code Number	Bits/Slot
DPCCH	15	15	256	0	10
DPDCH ₁	15	15	256	64	10
	30	30	128	32	20
	60	60	64	16	40
	120	120	32	8	80
	240	240	16	4	160
	480	480	8	2	320
	960	960	4	1	640
DPDCH _n	960	960	4	1, 2, 3	640

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all "1s". SAR for other spreading codes and multiple DPDCH_n, when supported by the EUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCH_n configuration, are less than ¼ dB higher than those measured in 12.2 kbps RMC.

2) HSDPA

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average outputs of each RF channel with HSDPA active is at ¼ dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HS-DPCCH is set automatically to the correct value when $\Delta ACK, \Delta NACK, \Delta CQI = 8$. The variation of the β_c / β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs} (1)	CM(dB)(2)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ ACK, Δ NACK and Δ CQI = 8 . $A_{hs} = \beta_{hs} / \beta_c = 30/15$. $\beta_{hs} = 30/15 * \beta_c$

Note 2 : CM=1 for $\beta_c / \beta_d = 12/15$, $\beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3 : For subtest 2 the β_c / β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

Table 11: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 12: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200

14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 13:HSDPA UE category

3) HSUPA

Body SAR is also measured for HSPA when the maximum average outputs of each RF channel with HSPA active is at ¼ dB higher than that measured without HSPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-set 1 and QPSK for FRC and 12.2kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA.

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA should be configured according to the values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSPA Data Device' sections of 3G device.

Sub - test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs(1)}$	β_{ec}	β_{ed}	β_{ec} (SF)	β_{ed} (code)	CM (dB)	MP R (dB)	AG Index	E-TFC I
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15 ⁽³⁾	209/25	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta ACK, \Delta NACK$ and $\Delta CQI = 8$. $A_{hs} = \beta_{hs}/\beta_c = 30/15$. $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference

Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$

Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$

Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Table 14:Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4.UE categories 1 to 6 support QPSK only.UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).

Table 15:HSUPA UE category

4) DC-HSDPA

In DC-HSDPA implementation of this device, the uplink parameters are the same as HSDPA. No additional channels and modulations (16 QAM, and 64 QAM) are supported in uplink. The difference is only in the downlink parameters, where two carriers are supported. HSDPA settings were used on uplink.

For Rel. 8 DC-HSDPA apply the four subtests from HSDPA Release 5 except use fixed reference channel H-Set 12 for DC-HSDPA. And we can apply the same SAR test exclusion criteria used for Rel. 6 HSPA for Rel. 7 HSPA+ and Rel. 8 DC-HSDPA. That is, if the HSPA, HSPA+, or the DC-HSDPA maximum output is not more than 0.25 dB higher than WCDMA, SAR measurement for those modes is not required.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 16: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

- 1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
- 2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

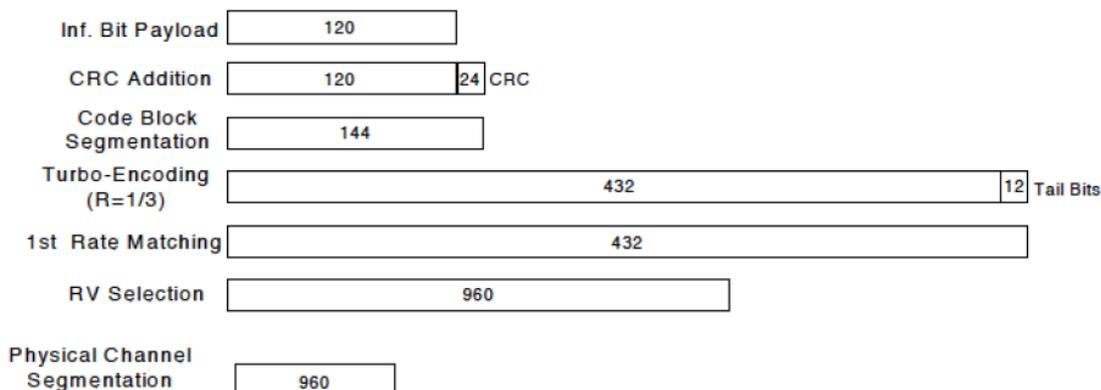


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test ^o	β_c ^o	β_d ^o	β_d (SF) ^o	β_c/β_d ^o	$\beta_{hs}(1)$ ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI=8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ ^o

Note 2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.^o

Note 3: For subtest2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$ ^o

Up commands are set continuously to set the UE to Max power.

Note:1.The Dual Carriers transmission only applies to HSDPA physical channels

- 2.The Dual Carriers belong to the same Node and are on adjacent carriers.
- 3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
- 4.The Dual Carriers operate in the same frequency band .
- 5.The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
- 6.The device doesn't support carrier aggregation for its release version is Release 8.

6.3 LTE Test Configurations

SAR for LTE band exposure configurations is measured according to the Procedures of KDB941225 D05. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed (see 3GPP standards) for the channel bandwidth and modulation combinations may be tested with MPR. Configurations with RB allocations below the required RB thresholds must be tested without MPR. A-MPR must always be disabled.

LTE Band II MPR as follows:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]				MPR
	5	10	15	20	
	MHz	MHz	MHz	MHz	
QPSK	1	1	1	1	0
QPSK	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 8	> 12	> 16	> 18	1
16 QAM	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 8	> 12	> 16	> 18	2

LTE Band IV MPR as follows:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]				MPR
	5	10	15	20	
	MHz	MHz	MHz	MHz	
QPSK	1	1	1	1	0
QPSK	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 8	> 12	> 16	> 18	0.5
16 QAM	≤ 8	≤ 12	≤ 16	≤ 18	0
16 QAM	> 8	> 12	> 16	> 18	1.5

LTE Band V MPR as follows:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]		MPR
	5	10	
	MHz	MHz	
QPSK	1	1	0
QPSK	≤ 8	≤ 12	0
QPSK	> 8	> 12	1
16 QAM	≤ 8	≤ 12	1
16 QAM	> 8	> 12	2

LTE Band VII MPR as belows:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]			MPR
	5	10	20	
	MHz	MHz	MHz	
QPSK	1	1	1	0
QPSK	≤ 8	≤ 12	≤ 18	0
QPSK	> 8	> 12	> 18	1
16 QAM	≤ 8	≤ 12	≤ 18	1
16 QAM	> 8	> 12	> 18	2

For each LTE frequency band, detail reduce test information is referred to section 7.2.4 to 7.2.5 and final test summary is as belows:

- a. Per KDB941225 D05 page 4,3) A),QPSK with 50% RB is required for the highest bandwilde.
- b. Per KDB941225 D05 page 4,3) B),QPSK with 1 RB for both channel edges are required for the highest bandwilde.
- c. Per KDB941225 D05 page 4,4) A),16QAM with 50% RB is required for the highest bandwilde.
- d. Per KDB941225 D05 page 4,4) B),16QAM with 1 RB for both channel edges are required for the highest bandwilde.
- e. Per KDB941225 D05 page 4, 3) A) I and 4) A) I,100% RB allocation is not required to be tested since SAR is not >1.45W/kg for the highest bandwilde.
- f. Per KDB941225 D05 page 5,5) B), 5MHz/3MHz/1.4MHz BW is not required to be tested since the max average conducted power is within ½ dB for 10MHzBW, and SAR of QPSK with 50% RB is < 1.45 W/kg.

Band II Body SAR

Bandwidth	Modulation Type	RB Size and Allocation	Test Channel	SAR Test
20MHz	QPSK	50% Centered	High Channel	No Test*
			Middle Channel	Tested*
			Low Channel	No Test*
		1RB Lower EDGE	High Channel	No Test
			Middle Channel	No Test
			Low Channel	Tested
		1RB Upper EDGE	High Channel	No Test
			Middle Channel	No Test
			Low Channel	Tested
	16QAM	50% Centered	High Channel	No Test
			Middle Channel	Tested
			Low Channel	No Test
		1RB Lower EDGE	High Channel	No Test
			Middle Channel	Tested
			Low Channel	No Test
1RB Upper EDGE		High Channel	No Test	
		Middle Channel	Tested	
		Low Channel	No Test	

*Please check SAR test result table of middle channel is <0.8W/kg, other channels are not required.

Band IV Body SAR

Bandwidth	Modulation Type	RB Size and Allocation	Test Channel	SAR Test
20MHz	QPSK	50% Centered	High Channel	No Test*
			Middle Channel	Tested*
			Low Channel	No Test*
		1RB Lower EDGE	High Channel	No Test
			Middle Channel	No Test
			Low Channel	Tested
		1RB Upper EDGE	High Channel	No Test
			Middle Channel	No Test
			Low Channel	Tested
	16QAM	50% Centered	High Channel	No Test
			Middle Channel	No Test
			Low Channel	Tested
		1RB Lower EDGE	High Channel	Tested
			Middle Channel	No Test
			Low Channel	No Test
1RB Upper EDGE		High Channel	No Test	
		Middle Channel	No Test	
		Low Channel	Tested	

*Please check SAR test result table of middle channel is <0.8W/kg, other channels are not required.

Band V Body SAR

Bandwidth	Modulation Type	RB Size and Allocation	Test Channel	SAR Test
10MHz	QPSK	50% Centered	High Channel	No Test*
			Middle Channel	Tested*
			Low Channel	No Test*
		1RB Lower EDGE	High Channel	No Test
			Middle Channel	No Test
			Low Channel	Tested
		1RB Upper EDGE	High Channel	No Test
			Middle Channel	Tested
			Low Channel	No Test
	16QAM	50% Centered	High Channel	No Test
			Middle Channel	Tested
			Low Channel	No Test
		1RB Lower EDGE	High Channel	No Test
			Middle Channel	No Test
			Low Channel	Tested
1RB Upper EDGE	High Channel	No Test		
	Middle Channel	Tested		
	Low Channel	No Test		

*Please check SAR test result table of middle channel is <0.8W/kg, other channels are not required.

Band VII Body SAR

Bandwidth	Modulation Type	RB Size and Allocation	Test Channel	SAR Test
20MHz	QPSK	50% Centered	High Channel	No Test*
			Middle Channel	Tested*
			Low Channel	No Test*
		1RB Lower EDGE	High Channel	No Test
			Middle Channel	No Test
			Low Channel	Tested
		1RB Upper EDGE	High Channel	No Test
			Middle Channel	No Test
			Low Channel	Tested
	16QAM	50% Centered	High Channel	No Test
			Middle Channel	No Test
			Low Channel	Tested
		1RB Lower EDGE	High Channel	No Test
			Middle Channel	Tested
			Low Channel	No Test
1RB Upper EDGE	High Channel	No Test		
	Middle Channel	No Test		
	Low Channel	Tested		

*Please check SAR test result table of middle channel is <0.8W/kg, other channels are not required.

7 SAR Measurement Results

7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200 was used.

SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

Note: CMU200 measures GSM peak and average output power for active timeslots. For SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal :

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
timebased avg. power compared to slotted avg. power	-9.19dB	-6.13dB	-4.42dB	-3.18dB

The signalling modes differ as follows:

mode	coding scheme	modulation
GPRS	CS1 to CS4	GMSK
EDGE	MCS1 to MCS4	GMSK
EDGE	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

7.1.1 Conducted power measurements GSM850

GSM850		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		128CH	190CH	251CH		128CH	190CH	251CH
Tested data with SAR2								
GPRS (GMSK)	1 Tx Slot	31.89	31.92	31.97	-9.19	22.70	22.73	22.78
	2 Tx Slots	31.27	31.34	31.20	-6.13	25.14	25.21	25.07
	3 Tx Slots	29.35	29.37	29.27	-4.42	24.93	24.95	24.85
	4 Tx Slots	27.28	27.17	27.24	-3.18	24.10	23.99	24.06
EDGE (GMSK)	1 Tx Slot	31.73	31.84	31.79	-9.19	22.54	22.65	22.60
	2 Tx Slots	31.11	31.20	31.13	-6.13	24.98	25.07	25.00
	3 Tx Slots	29.19	29.22	29.24	-4.42	24.77	24.80	24.82
	4 Tx Slots	27.12	27.09	27.11	-3.18	23.94	23.91	23.93
EDGE (8PSK)	1 Tx Slot	25.36	25.09	24.90	-9.19	16.17	15.90	15.71
	2 Tx Slots	24.71	24.38	24.22	-6.13	18.58	18.25	18.09
	3 Tx Slots	22.62	22.45	22.22	-4.42	18.20	18.03	17.80
	4 Tx Slots	20.68	20.48	20.26	-3.18	17.50	17.30	17.08

Table 17: Test results conducted power measurement GSM850

Note: 1. The conducted power of GSM850 is measured with RMS detector.

2. Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

7.1.2 Conducted power measurements GSM1900

GSM1900		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		512CH	661CH	810CH		512CH	661CH	810CH
Tested data with SAR2								
GPRS (GMSK)	1 Tx Slot	29.13	29.33	29.28	-9.19	19.94	20.14	20.09
	2 Tx Slots	28.12	28.24	28.32	-6.13	21.99	22.11	22.19
	3 Tx Slots	26.07	26.26	26.25	-4.42	21.65	21.84	21.83
	4 Tx Slots	24.02	24.30	24.36	-3.18	20.84	21.12	21.18
EDGE (GMSK)	1 Tx Slot	28.99	28.49	28.76	-9.19	19.80	19.30	19.57
	2 Tx Slots	27.98	27.51	27.75	-6.13	21.85	21.38	21.62
	3 Tx Slots	25.91	25.46	25.76	-4.42	21.49	21.04	21.34
	4 Tx Slots	23.92	23.55	23.80	-3.18	20.74	20.37	20.62
EDGE (8PSK)	1 Tx Slot	24.28	24.50	24.60	-9.19	15.09	15.31	15.41
	2 Tx Slots	23.61	23.82	24.03	-6.13	17.48	17.69	17.90
	3 Tx Slots	21.29	21.49	21.53	-4.42	16.87	17.07	17.11
	4 Tx Slots	19.06	19.32	19.38	-3.18	15.88	16.14	16.20

Table 18: Test results conducted power measurement GSM1900

Note: 1. The conducted power of GSM1900 is measured with RMS detector.

2. Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

7.1.3 Conducted power measurements UMTS Band II

UMTS Band II		Average Power (dBm)		
		9262CH	9400CH	9538CH
Tested data with SAR2				
WCDMA	12.2kbps RMC	22.88	22.32	22.45
	64kbps RMC	22.86	22.29	22.37
	144kbps RMC	22.89	22.24	22.36
	384kbps RMC	22.83	22.23	22.34
HSDPA	Subtest 1	22.86	22.14	22.24
	Subtest 2	22.47	21.74	21.48
	Subtest 3	21.90	21.63	21.39
	Subtest 4	21.76	21.66	21.70
HSUPA	Subtest 1	21.60	20.90	21.01
	Subtest 2	20.59	20.08	19.90
	Subtest 3	20.46	19.96	19.85
	Subtest 4	20.31	19.81	19.77
	Subtest 5	21.65	21.03	21.07
DC-HSDPA	Subtest 1	22.54	22.03	22.01
	Subtest 2	22.61	21.88	21.66
	Subtest 3	21.98	21.43	21.50
	Subtest 4	21.85	21.47	21.82

Table 19:Test results conducted power measurement UMTS Band II

Note: The conducted power of UMTS Band II is measured with RMS detector.

7.1.4 Conducted power measurements UMTS Band IV

UMTS Band IV		Average Power (dBm)		
		1312CH	1413CH	1513CH
Tested data with SAR2				
WCDMA	12.2kbps RMC	21.90	21.86	21.95
	64kbps RMC	21.80	21.80	21.85
	144kbps RMC	21.76	21.81	21.86
	384kbps RMC	21.72	21.75	21.80
HSDPA	Subtest 1	21.76	22.04	21.82
	Subtest 2	21.14	21.80	21.36
	Subtest 3	20.67	21.25	21.13
	Subtest 4	19.64	20.28	20.02
HSUPA	Subtest 1	21.01	21.15	21.04
	Subtest 2	18.03	18.20	18.10
	Subtest 3	19.99	20.10	20.08
	Subtest 4	17.80	17.86	17.93
	Subtest 5	20.98	21.22	21.15
DC-HSDPA	Subtest 1	21.38	21.51	21.44
	Subtest 2	21.06	21.58	21.23
	Subtest 3	20.47	20.53	20.84
	Subtest 4	19.48	19.73	19.76

Table 20:Test results conducted power measurement UMTS Band IV

Note: The conducted power of UMTS Band IV is measured with RMS detector.

7.1.5 Conducted power measurements UMTS Band V

UMTS Band V		Average Power (dBm)		
		4132CH	4182CH	4233CH
Tested data with SAR1				
WCDMA	12.2kbps RMC	21.69	21.83	22.04
	64kbps RMC	21.69	21.74	21.99
	144kbps RMC	21.71	21.75	21.98
	384kbps RMC	21.69	21.77	21.95
HSDPA	Subtest 1	21.65	21.68	21.99
	Subtest 2	21.42	21.67	21.71
	Subtest 3	21.15	21.09	21.33
	Subtest 4	21.02	21.14	21.34
HSUPA	Subtest 1	20.73	20.81	21.09
	Subtest 2	18.82	18.75	19.11
	Subtest 3	19.67	19.77	19.99
	Subtest 4	19.51	19.60	19.56
	Subtest 5	20.84	20.81	20.78
DC-HSDPA	Subtest 1	21.53	21.43	21.77
	Subtest 2	21.51	21.52	21.68
	Subtest 3	21.36	21.25	21.46
	Subtest 4	21.12	21.26	21.49

Table 21:Test results conducted power measurement UMTS Band V

Note: The conducted power of UMTS Band V is measured with RMS detector.

7.1.6 Conducted power measurements LTE Band II

Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Target MPR(dB)	Average Power (dBm)
Tested data with SAR1						
18625	5	1	0	QPSK	0	22.13
		1	24	QPSK	0	22.43
		12	6	QPSK	1	21.80
		25	0	QPSK	1	21.75
		1	0	16-QAM	1	21.62
		1	24	16-QAM	1	21.91
		12	6	16-QAM	2	21.21
		25	0	16-QAM	2	21.01
18650	10	1	0	QPSK	0	21.86
		1	49	QPSK	0	21.39
		25	13	QPSK	1	21.63
		50	0	QPSK	1	21.36
		1	0	16-QAM	1	21.65
		1	49	16-QAM	1	22.06
		25	13	16-QAM	2	20.96
		50	0	16-QAM	2	20.54
18675	15	1	0	QPSK	0	22.61
		1	74	QPSK	0	22.70
		36	18	QPSK	1	21.69
		75	0	QPSK	1	21.57
		1	0	16-QAM	1	22.09
		1	74	16-QAM	1	22.01
		36	18	16-QAM	2	20.93
		75	0	16-QAM	2	20.82
18700	20	1	0	QPSK	0	22.70
		1	99	QPSK	0	22.78
		50	25	QPSK	1	21.59
		100	0	QPSK	1	21.65
		1	0	16-QAM	1	22.12
		1	99	16-QAM	1	22.22
		50	25	16-QAM	2	21.04
		100	0	16-QAM	2	20.97

Table 22: Test results conducted power measurement LTE Band II Low channel

Note: The conducted power of LTE Band II is measured with RMS detector.

Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Target MPR(dB)	Average Power (dBm)
Tested data with SAR1						
18900	5	1	0	QPSK	0	22.06
		1	24	QPSK	0	22.41
		12	6	QPSK	1	21.41
		25	0	QPSK	1	21.43
		1	0	16-QAM	1	21.35
		1	24	16-QAM	1	21.59
		12	6	16-QAM	2	20.74
		25	0	16-QAM	2	20.73
	10	1	0	QPSK	0	22.05
		1	49	QPSK	0	22.54
		25	13	QPSK	1	21.50
		50	0	QPSK	1	21.35
		1	0	16-QAM	1	21.36
		1	49	16-QAM	1	22.28
		25	13	16-QAM	2	20.76
		50	0	16-QAM	2	20.62
	15	1	0	QPSK	0	22.30
		1	74	QPSK	0	22.57
		36	18	QPSK	1	21.75
		75	0	QPSK	1	21.40
		1	0	16-QAM	1	21.89
		1	74	16-QAM	1	22.24
		36	18	16-QAM	2	20.96
		75	0	16-QAM	2	20.69
	20	1	0	QPSK	0	22.51
		1	99	QPSK	0	22.59
		50	25	QPSK	1	21.81
		100	0	QPSK	1	21.61
		1	0	16-QAM	1	22.16
		1	99	16-QAM	1	22.23
		50	25	16-QAM	2	20.87
		100	0	16-QAM	2	20.77

Table 23:Test results conducted power measurement LTE Band II Mid channel

Note: The conducted power of LTE Band II is measured with RMS detector.

Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Target MPR(dB)	Average Power (dBm)
Tested data with SAR1						
19175	5	1	0	QPSK	0	22.17
		1	24	QPSK	0	21.53
		12	6	QPSK	1	21.53
		25	0	QPSK	1	21.35
		1	0	16-QAM	1	21.76
		1	24	16-QAM	1	21.13
		12	6	16-QAM	2	20.64
		25	0	16-QAM	2	20.48
19150	10	1	0	QPSK	0	22.47
		1	49	QPSK	0	21.85
		25	13	QPSK	1	21.36
		50	0	QPSK	1	21.35
		1	0	16-QAM	1	22.03
		1	49	16-QAM	1	21.53
		25	13	16-QAM	2	20.61
		50	0	16-QAM	2	20.47
19125	15	1	0	QPSK	0	22.67
		1	74	QPSK	0	21.93
		36	18	QPSK	1	21.81
		75	0	QPSK	1	21.65
		1	0	16-QAM	1	22.25
		1	74	16-QAM	1	21.41
		36	18	16-QAM	2	20.96
		75	0	16-QAM	2	20.97
19100	20	1	0	QPSK	0	22.57
		1	99	QPSK	0	21.81
		50	25	QPSK	1	21.98
		100	0	QPSK	1	21.83
		1	0	16-QAM	1	22.15
		1	99	16-QAM	1	21.47
		50	25	16-QAM	2	21.27
		100	0	16-QAM	2	21.22

Table 24: Test results conducted power measurement LTE Band II High channel

Note: The conducted power of LTE Band II is measured with RMS detector.

7.1.7 Conducted power measurements LTE Band IV

Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Target MPR(dB)	Average Power (dBm)
Tested data with SAR1						
19975	5	1	0	QPSK	0	22.31
		1	24	QPSK	0	22.29
		12	6	QPSK	0.5	21.55
		25	0	QPSK	0.5	21.31
		1	0	16-QAM	0	21.81
		1	24	16-QAM	0	21.96
		12	6	16-QAM	1.5	20.81
		25	0	16-QAM	1.5	20.66
20000	10	1	0	QPSK	0	22.03
		1	49	QPSK	0	22.45
		25	13	QPSK	0.5	21.69
		50	0	QPSK	0.5	21.44
		1	0	16-QAM	0	21.68
		1	49	16-QAM	0	22.23
		25	13	16-QAM	1.5	20.78
		50	0	16-QAM	1.5	20.55
20025	15	1	0	QPSK	0	22.33
		1	74	QPSK	0	22.58
		36	18	QPSK	0.5	21.59
		75	0	QPSK	0.5	21.66
		1	0	16-QAM	0	21.90
		1	74	16-QAM	0	22.28
		36	18	16-QAM	1.5	20.71
		75	0	16-QAM	1.5	20.52
20050	20	1	0	QPSK	0	22.30
		1	99	QPSK	0	22.51
		50	25	QPSK	0.5	21.55
		100	0	QPSK	0.5	21.52
		1	0	16-QAM	0	21.72
		1	99	16-QAM	0	22.03
		50	25	16-QAM	1.5	20.76
		100	0	16-QAM	1.5	20.57

Table 25: Test results conducted power measurement LTE Band IV Low channel

Note: The conducted power of LTE Band IV is measured with RMS detector.

Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Target MPR(dB)	Average Power (dBm)
Tested data with SAR1						
20175	5	1	0	QPSK	0	22.52
		1	24	QPSK	0	22.42
		12	6	QPSK	0.5	21.70
		25	0	QPSK	0.5	21.49
		1	0	16-QAM	0	22.09
		1	24	16-QAM	0	21.78
		12	6	16-QAM	1.5	21.19
		25	0	16-QAM	1.5	20.93
	10	1	0	QPSK	0	22.25
		1	49	QPSK	0	22.39
		25	13	QPSK	0.5	21.43
		50	0	QPSK	0.5	21.25
		1	0	16-QAM	0	21.88
		1	49	16-QAM	0	22.02
		25	13	16-QAM	1.5	20.90
		50	0	16-QAM	1.5	20.75
	15	1	0	QPSK	0	22.40
		1	74	QPSK	0	22.34
		36	18	QPSK	0.5	21.38
		75	0	QPSK	0.5	21.24
		1	0	16-QAM	0	21.89
		1	74	16-QAM	0	21.97
		36	18	16-QAM	1.5	20.93
		75	0	16-QAM	1.5	20.74
	20	1	0	QPSK	0	22.27
		1	99	QPSK	0	22.37
		50	25	QPSK	0.5	21.59
		100	0	QPSK	0.5	21.48
		1	0	16-QAM	0	21.96
		1	99	16-QAM	0	22.01
		50	25	16-QAM	1.5	20.86
		100	0	16-QAM	1.5	20.76

Table 26: Test results conducted power measurement LTE Band IV Mid channel

Note: The conducted power of LTE Band IV is measured with RMS detector.

Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Target MPR(dB)	Average Power (dBm)
Tested data with SAR1						
20375	5	1	0	QPSK	0	22.10
		1	24	QPSK	0	22.03
		12	6	QPSK	0.5	21.54
		25	0	QPSK	0.5	21.42
		1	0	16-QAM	0	21.67
		1	24	16-QAM	0	21.50
		12	6	16-QAM	1.5	20.91
		25	0	16-QAM	1.5	20.79
20350	10	1	0	QPSK	0	22.07
		1	49	QPSK	0	22.18
		25	13	QPSK	0.5	21.36
		50	0	QPSK	0.5	21.14
		1	0	16-QAM	0	21.65
		1	49	16-QAM	0	21.84
		25	13	16-QAM	1.5	20.69
		50	0	16-QAM	1.5	20.48
20325	15	1	0	QPSK	0	22.21
		1	74	QPSK	0	22.27
		36	18	QPSK	0.5	21.42
		75	0	QPSK	0.5	21.41
		1	0	16-QAM	0	21.90
		1	74	16-QAM	0	21.84
		36	18	16-QAM	1.5	20.64
		75	0	16-QAM	1.5	20.55
20300	20	1	0	QPSK	0	22.26
		1	99	QPSK	0	22.13
		50	25	QPSK	0.5	21.39
		100	0	QPSK	0.5	21.27
		1	0	16-QAM	0	21.97
		1	99	16-QAM	0	21.81
		50	25	16-QAM	1.5	20.56
		100	0	16-QAM	1.5	20.51

Table 27: Test results conducted power measurement LTE Band IV High channel

Note: The conducted power of LTE Band IV is measured with RMS detector.

7.1.8 Conducted power measurements LTE Band V

Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Target MPR(dB)	Average Power (dBm)
Tested data with SAR1						
20425	5	1	0	QPSK	0	22.61
		1	24	QPSK	0	22.68
		12	6	QPSK	1	21.96
		25	0	QPSK	1	21.87
		1	0	16-QAM	1	22.05
		1	24	16-QAM	1	21.92
		12	6	16-QAM	2	20.94
		25	0	16-QAM	2	20.98
20450	10	1	0	QPSK	0	22.45
		1	49	QPSK	0	21.61
		25	13	QPSK	1	21.67
		50	0	QPSK	1	21.64
		1	0	16-QAM	1	21.85
		1	49	16-QAM	1	21.95
		25	13	16-QAM	2	20.91
		50	0	16-QAM	2	20.62

Table 28:Test results conducted power measurement LTE Band V Low channel

Note: The conducted power of LTE Band V is measured with RMS detector.

Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Target MPR(dB)	Average Power (dBm)
Tested data with SAR1						
20525	5	1	0	QPSK	0	22.33
		1	24	QPSK	0	22.38
		12	6	QPSK	1	21.75
		25	0	QPSK	1	21.64
		1	0	16-QAM	1	21.69
		1	24	16-QAM	1	21.77
		12	6	16-QAM	2	20.86
		25	0	16-QAM	2	20.73
	10	1	0	QPSK	0	21.96
		1	49	QPSK	0	22.60
		25	13	QPSK	1	21.70
		50	0	QPSK	1	21.38
		1	0	16-QAM	1	21.51
		1	49	16-QAM	1	22.02
		25	13	16-QAM	2	20.78
		50	0	16-QAM	2	20.59

Table 29:Test results conducted power measurement LTE Band V Mid channel

Note: The conducted power of LTE Band V is measured with RMS detector.

Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Target MPR(dB)	Average Power (dBm)
Tested data with SAR1						
20625	5	1	0	QPSK	0	22.35
		1	24	QPSK	0	21.98
		12	6	QPSK	1	21.72
		25	0	QPSK	1	21.56
		1	0	16-QAM	1	21.61
		1	24	16-QAM	1	21.25
		12	6	16-QAM	2	20.83
		25	0	16-QAM	2	20.78
20600	10	1	0	QPSK	0	22.40
		1	49	QPSK	0	22.23
		25	13	QPSK	1	21.52
		50	0	QPSK	1	21.34
		1	0	16-QAM	1	21.82
		1	49	16-QAM	1	21.74
		25	13	16-QAM	2	20.77
		50	0	16-QAM	2	20.46

Table 30:Test results conducted power measurement LTE Band V High channel

Note: The conducted power of LTE Band V is measured with RMS detector.

7.1.9 Conducted power measurements LTE Band VII

Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Target MPR(dB)	Average Power (dBm)
Tested data with SAR1						
20775	5	1	0	QPSK	0	21.71
		1	24	QPSK	0	21.80
		12	6	QPSK	1	22.07
		25	0	QPSK	1	22.06
		1	0	16-QAM	1	21.79
		1	24	16-QAM	1	21.81
		12	6	16-QAM	2	21.32
		25	0	16-QAM	2	21.24
20800	10	1	0	QPSK	0	21.71
		1	49	QPSK	0	22.13
		25	13	QPSK	1	22.18
		50	0	QPSK	1	21.96
		1	0	16-QAM	1	21.66
		1	49	16-QAM	1	22.11
		25	13	16-QAM	2	21.24
		50	0	16-QAM	2	21.08
20850	20	1	0	QPSK	0	22.00
		1	99	QPSK	0	22.60
		50	25	QPSK	1	22.26
		100	0	QPSK	1	22.26
		1	0	16-QAM	1	21.95
		1	99	16-QAM	1	22.48
		50	25	16-QAM	2	21.27
		100	0	16-QAM	2	21.29

Table 31: Test results conducted power measurement LTE Band VII Low channel

Note: The conducted power of LTE Band VII is measured with RMS detector.

Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Target MPR(dB)	Average Power (dBm)
Tested data with SAR1						
21100	5	1	0	QPSK	0	22.04
		1	24	QPSK	0	21.73
		12	6	QPSK	1	22.27
		25	0	QPSK	1	22.09
		1	0	16-QAM	1	21.89
		1	24	16-QAM	1	21.76
		12	6	16-QAM	2	21.41
		25	0	16-QAM	2	21.29
	10	1	0	QPSK	0	21.85
		1	49	QPSK	0	21.97
		25	13	QPSK	1	22.26
		50	0	QPSK	1	21.98
		1	0	16-QAM	1	21.84
		1	49	16-QAM	1	22.04
		25	13	16-QAM	2	21.29
		50	0	16-QAM	2	21.06
	20	1	0	QPSK	0	22.14
		1	99	QPSK	0	22.00
		50	25	QPSK	1	22.09
		100	0	QPSK	1	22.05
		1	0	16-QAM	1	22.27
		1	99	16-QAM	1	22.06
		50	25	16-QAM	2	21.24
		100	0	16-QAM	2	21.11

Table 32: Test results conducted power measurement LTE Band VII Mid channel

Note: The conducted power of LTE Band VII is measured with RMS detector.

Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Target MPR(dB)	Average Power (dBm)
Tested data with SAR1						
21425	5	1	0	QPSK	0	21.97
		1	24	QPSK	0	21.90
		12	6	QPSK	1	22.17
		25	0	QPSK	1	22.07
		1	0	16-QAM	1	22.04
		1	24	16-QAM	1	21.89
		12	6	16-QAM	2	21.45
		25	0	16-QAM	2	21.30
21400	10	1	0	QPSK	0	21.91
		1	49	QPSK	0	22.13
		25	13	QPSK	1	22.34
		50	0	QPSK	1	22.04
		1	0	16-QAM	1	21.99
		1	49	16-QAM	1	22.16
		25	13	16-QAM	2	21.36
		50	0	16-QAM	2	21.26
21350	20	1	0	QPSK	0	21.97
		1	99	QPSK	0	22.08
		50	25	QPSK	1	22.26
		100	0	QPSK	1	22.23
		1	0	16-QAM	1	22.08
		1	99	16-QAM	1	22.20
		50	25	16-QAM	2	21.45
		100	0	16-QAM	2	21.33

Table 33: Test results conducted power measurement LTE Band VII High channel

Note: The conducted power of LTE Band VII is measured with RMS detector.

7.2 SAR measurement Result

7.2.1 SAR measurement Result of GSM850

Test Position of Body with 5mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Limit (W/kg)	Liquid Temp.
			1-g	10-g			
Tested data with SAR2							
Front Side	190/836.6	GPRS 1TS	0.720	0.452	-0.090	1.6	21.4°C
		GPRS 2TS	0.700	0.439	-0.150	1.6	21.4°C
		GPRS 3TS	0.751	0.472	0.150	1.6	21.4°C
		GPRS 4TS	0.699	0.438	0.100	1.6	21.4°C
Rear Side	251/848.8	GPRS 3TS	0.990	0.574	-0.170	1.6	21.4°C
	190/836.6		0.830	0.487	0.040	1.6	21.4°C
	128/824.2		0.784	0.460	-0.170	1.6	21.4°C
Left Side	190/836.6	GPRS 3TS	0.172	0.120	0.160	1.6	21.4°C
Right Side	190/836.6	GPRS 3TS	0.566	0.357	-0.050	1.6	21.4°C
Rear Side	251/848.8	EDGE 1TS	0.955	0.551	-0.180	1.6	21.4°C
	190/836.6		0.868	0.506	-0.170	1.6	21.4°C
	128/824.2		0.781	0.455	-0.150	1.6	21.4°C
Rear Side	251/848.8	EDGE 2TS	0.944	0.547	-0.160	1.6	21.4°C
	190/836.6		0.855	0.497	0.120	1.6	21.4°C
	128/824.2		0.766	0.446	-0.180	1.6	21.4°C
Rear Side	251/848.8	EDGE 3TS	1.010	0.587	-0.090	1.6	21.4°C
	190/836.6		0.915	0.531	-0.180	1.6	21.4°C
	128/824.2		0.818	0.475	-0.140	1.6	21.4°C
Rear Side	251/848.8	EDGE 4TS	0.949	0.549	-0.160	1.6	21.4°C
	190/836.6		0.852	0.494	-0.110	1.6	21.4°C
	128/824.2		0.764	0.446	-0.150	1.6	21.4°C

Table 34: Test results Body SAR GSM850

Note: 1) The maximum SAR value of each test band is marked **bold**.

2) Per KDB447498 D01, the SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.

3) The antenna is not within 1.0 cm from the tip of the dongle, so the tip of the dongle does not need to be tested.

4) The SAR level for the horizontal position is < 1.2 W/kg, so testing at the additional position is optional.

7.2.2 SAR measurement Result of GSM1900

Test Position of Body with 5mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Limit (W/kg)	Liquid Temp.
			1-g	10-g			
Tested data with SAR2							
Front Side	661/1880	GPRS 1TS	0.484	0.268	-0.050	1.6	21.4°C
	661/1880	GPRS 2TS	0.527	0.291	0.020	1.6	21.4°C
	661/1880	GPRS 3TS	0.536	0.298	0.140	1.6	21.4°C
	661/1880	GPRS 4TS	0.505	0.280	-0.050	1.6	21.4°C
Rear Side	661/1880	GPRS 3TS	0.799	0.427	0.020	1.6	21.4°C
Left Side	661/1880	GPRS 3TS	0.161	0.090	-0.020	1.6	21.4°C
Right Side	661/1880	GPRS 3TS	0.547	0.296	-0.040	1.6	21.4°C
Rear Side	661/1880	EDGE 1TS	0.751	0.399	-0.110	1.6	21.4°C
Rear Side	661/1880	EDGE 2TS	0.755	0.404	-0.180	1.6	21.4°C
Rear Side	810/1909.8	EDGE 3TS	0.955	0.513	-0.110	1.6	21.4°C
	661/1880		0.902	0.482	-0.150	1.6	21.4°C
	512/1850.2		0.764	0.403	-0.110	1.6	21.4°C
Rear Side	810/1909.8	EDGE 4TS	0.923	0.498	-0.100	1.6	21.4°C
	661/1880		0.861	0.460	-0.110	1.6	21.4°C
	512/1850.2		0.724	0.382	-0.070	1.6	21.4°C

Table 35: Test results Body SAR GSM1900

Note: 1) The maximum SAR value of each test band is marked **bold**.

2) Per KDB447498 D01, the SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.

3) The antenna is not within 1.0 cm from the tip of the dongle, so the tip of the dongle does not need to be tested.

4) The SAR level for the horizontal position is < 1.2 W/kg, so testing at the additional position is optional.

7.2.3 SAR measurement Result of UMTS Band V

Test Position of Body with 5mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Limit (W/kg)	Liquid Temp.
			1-g	10-g			
Tested data with SAR1							
Front Side	4182/836.4	RMC	0.698	0.434	0.090	1.6	21.4°C
Rear Side	4182/836.4	RMC	0.737	0.427	-0.080	1.6	21.4°C
Left Side	4182/836.4	RMC	0.126	0.087	0.180	1.6	21.4°C
Right Side	4182/836.4	RMC	0.425	0.259	0.000	1.6	21.4°C
Rear Side	4182/836.4	HSDPA	0.705	0.405	-0.140	1.6	21.4°C
Rear Side	4182/836.4	HSUPA	0.643	0.369	0.010	1.6	21.4°C

Table 36:Test results Body SAR UMTS Band V

Note: 1) The maximum SAR value of each test band is marked **bold**.

2) Per KDB447498 D01,the SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.

3) The antenna is not within 1.0 cm from the tip of the dongle,so the tip of the dongle does not need to be tested.

4) The SAR level for the horizontal position is<1.2W/kg, so testing at the additional position is optional.

5) The DC-HSDPA maximum output is not more than 0.25 dB higher than WCDMA, SAR measurement for DC-HSDPA is not required.

7.2.4 SAR measurement Result of UMTS Band IV

Test Position of Body with 5mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Limit (W/kg)	Liquid Temp.
			1-g	10-g			
Tested data with SAR2							
Front Side	1413/1732.6	RMC	0.738	0.392	0.040	1.6	21.4°C
Rear Side	1513/1752.6	RMC	1.160	0.591	-0.110	1.6	21.4°C
Rear Side	1413/1732.6	RMC	1.110	0.548	0.080	1.6	21.4°C
Rear Side	1312/1712.4	RMC	1.180	0.588	-0.080	1.6	21.4°C
Left Side	1413/1732.6	RMC	0.174	0.090	0.030	1.6	21.4°C
Right Side	1413/1732.6	RMC	0.449	0.233	0.150	1.6	21.4°C
Rear Side	1312/1712.4	HSDPA	1.120	0.559	-0.020	1.6	21.4°C
Rear Side	1312/1712.4	HSUPA	0.787	0.392	-0.060	1.6	21.4°C

Table 37:Test results Body SAR UMTS Band IV

Note: 1) The maximum SAR value of each test band is marked **bold**.

2) Per KDB447498 D01,the SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.

3) The antenna is not within 1.0 cm from the tip of the dongle,so the tip of the dongle does not need to be tested.

4) The SAR level for the horizontal position is<1.2W/kg, so testing at the additional position is optional.

5) The DC-HSDPA maximum output is not more than 0.25 dB higher than WCDMA, SAR measurement for DC-HSDPA is not required.

7.2.5 SAR measurement Result of UMTS Band II

Test Position of Body with 5mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Limit (W/kg)	Liquid Temp.
			1-g	10-g			
Tested data with SAR2							
Front Side	9400/1880	RMC	0.609	0.342	0.060	2.0	21.4°C
Rear Side	9538/1907.6	RMC	0.837	0.438	-0.190	2.0	21.4°C
Rear Side	9400/1880	RMC	0.909	0.484	-0.040	2.0	21.4°C
Rear Side	9262/1852.4	RMC	1.030	0.543	-0.140	2.0	21.4°C
Left Side	9400/1880	RMC	0.166	0.092	0.130	2.0	21.4°C
Right Side	9400/1880	RMC	0.713	0.390	0.130	2.0	21.4°C
Rear Side	9262/1852.4	HSDPA	0.965	0.504	-0.160	2.0	21.4°C
Rear Side	9262/1852.4	HSUPA	0.784	0.414	-0.020	2.0	21.4°C

Table 38:Test results Body SAR UMTS Band II

Note: 1) The maximum SAR value of each test band is marked **bold**.

2) Per KDB447498 D01,the SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.

3) The antenna is not within 1.0 cm from the tip of the dongle,so the tip of the dongle does not need to be tested.

4) The SAR level for the horizontal position is<1.2W/kg, so testing at the additional position is optional.

5) The DC-HSDPA maximum output is not more than 0.25 dB higher than WCDMA, SAR measurement for DC-HSDPA is not required.

7.2.6 Results overview of LTE Band II

Test Position of Body with 5mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Limit (W/kg)	Liquid Temp.
			1-g	10-g			
Tested data with SAR1							
20M QPSK							
Front Side	18900/1880	50%RB#25	0.694	0.371	0.150	1.6	21.4°C
Rear Side	18700/1860	50%RB#25	0.955	0.493	0.040	1.6	21.4°C
	18900/1880	50%RB#25	0.966	0.504	-0.050	1.6	21.4°C
	19100/1900	50%RB#25	0.902	0.465	-0.040	1.6	21.4°C
Left Side	18900/1880	50%RB#25	0.135	0.073	-0.040	1.6	21.4°C
Right Side	18900/1880	50%RB#25	0.651	0.347	-0.040	1.6	21.4°C
20M QPSK							
Front Side	18700/1860	1RB#0	0.689	0.363	0.100	1.6	21.4°C
Rear Side	18700/1860	1RB#0	0.970	0.500	0.150	1.6	21.4°C
Left Side	18700/1860	1RB#0	0.127	0.070	0.080	1.6	21.4°C
Right Side	18700/1860	1RB#0	0.612	0.324	0.040	1.6	21.4°C
20M QPSK							
Front Side	18700/1860	1RB#99	0.771	0.412	0.020	1.6	21.4°C
Rear Side	18700/1860	1RB#99	1.060	0.548	0.020	1.6	21.4°C
Left Side	18700/1860	1RB#99	0.151	0.083	-0.020	1.6	21.4°C
Right Side	18700/1860	1RB#99	0.701	0.373	0.110	1.6	21.4°C
20M 16QAM							
Front Side	18900/1880	50%RB#25	0.701	0.375	-0.120	1.6	21.4°C
Rear Side	18900/1880	50%RB#25	0.947	0.491	0.130	1.6	21.4°C
Left Side	18900/1880	50%RB#25	0.131	0.071	0.100	1.6	21.4°C
Right Side	18900/1880	50%RB#25	0.615	0.329	-0.020	1.6	21.4°C
20M 16QAM							
Front Side	18900/1880	1RB#0	0.737	0.394	0.030	1.6	21.4°C
Rear Side	18900/1880	1RB#0	0.998	0.520	0.050	1.6	21.4°C
Left Side	18900/1880	1RB#0	0.148	0.080	0.160	1.6	21.4°C
Right Side	18900/1880	1RB#0	0.674	0.359	0.190	1.6	21.4°C
20M 16QAM							
Front Side	18900/1880	1RB#99	0.709	0.385	0.060	1.6	21.4°C
Rear Side	18900/1880	1RB#99	0.918	0.479	0.020	1.6	21.4°C
Left Side	18900/1880	1RB#99	0.132	0.072	0.110	1.6	21.4°C
Right Side	18900/1880	1RB#99	0.629	0.338	0.140	1.6	21.4°C

Table 39:Test results Body SAR LTE Band II

Note: 1) The maximum SAR value of each test band is marked **bold**.

2) Per KDB447498 D01,the SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.

3) The antenna is not within 1.0 cm from the tip of the dongle,so the tip of the dongle does not need to be tested.

4) The SAR level for the horizontal position is<1.2W/kg, so testing at the additional position is optional.

7.2.7 Results overview of LTE Band IV

Test Position of Body with 5mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Limit (W/kg)	Liquid Temp.
			1-g	10-g			
Tested data with SAR1							
20M QPSK							
Front Side	20175/1732.5	50%RB#25	0.684	0.365	0.020	1.6	21.4°C
Rear Side	20050/1720	50%RB#25	0.972	0.493	-0.010	1.6	21.4°C
	20175/1732.5	50%RB#25	0.906	0.462	-0.160	1.6	21.4°C
	20300/1745	50%RB#25	0.954	0.480	-0.160	1.6	21.4°C
Left Side	20175/1732.5	50%RB#25	0.075	0.042	0.070	1.6	21.4°C
Right Side	20175/1732.5	50%RB#25	0.441	0.227	0.180	1.6	21.4°C
20M QPSK							
Front Side	20050/1720	1RB#0	0.745	0.399	-0.110	1.6	21.4°C
Rear Side	20050/1720	1RB#0	0.930	0.467	-0.090	1.6	21.4°C
Left Side	20050/1720	1RB#0	0.085	0.047	-0.130	1.6	21.4°C
Right Side	20050/1720	1RB#0	0.476	0.248	0.100	1.6	21.4°C
20M QPSK							
Front Side	20050/1720	1RB#99	0.688	0.366	0.000	1.6	21.4°C
Rear Side	20050/1720	1RB#99	0.932	0.468	-0.090	1.6	21.4°C
Left Side	20050/1720	1RB#99	0.074	0.041	-0.020	1.6	21.4°C
Right Side	20050/1720	1RB#99	0.470	0.240	0.160	1.6	21.4°C
20M 16QAM							
Front Side	20050/1720	50%RB#25	0.719	0.384	0.090	1.6	21.4°C
Rear Side	20050/1720	50%RB#25	1.060	0.541	-0.100	1.6	21.4°C
Left Side	20050/1720	50%RB#25	0.081	0.045	0.170	1.6	21.4°C
Right Side	20050/1720	50%RB#25	0.459	0.237	0.010	1.6	21.4°C
20M 16QAM							
Front Side	20300/1745	1RB#0	0.678	0.361	-0.070	1.6	21.4°C
Rear Side	20300/1745	1RB#0	0.990	0.500	0.100	1.6	21.4°C
Left Side	20300/1745	1RB#0	0.077	0.043	0.030	1.6	21.4°C
Right Side	20300/1745	1RB#0	0.476	0.242	0.020	1.6	21.4°C
20M 16QAM							
Front Side	20050/1720	1RB#99	0.669	0.357	0.010	1.6	21.4°C
Rear Side	20050/1720	1RB#99	1.020	0.517	-0.080	1.6	21.4°C
Left Side	20050/1720	1RB#99	0.071	0.040	-0.190	1.6	21.4°C
Right Side	20050/1720	1RB#99	0.429	0.220	-0.090	1.6	21.4°C

Table 40: Test results Body SAR LTE Band IV

Note: 1) The maximum SAR value of each test band is marked **bold**.

2) Per KDB447498 D01, the SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.

3) The antenna is not within 1.0 cm from the tip of the dongle, so the tip of the dongle does not need to be tested.

4) The SAR level for the horizontal position is < 1.2W/kg, so testing at the additional position is optional.

7.2.8 Results overview of LTE Band V

Test Position of Body with 5mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Limit (W/kg)	Liquid Temp.
			1-g	10-g			
Tested data with SAR1							
10M QPSK							
Front Side	20525/836.5	50%RB#13	0.569	0.356	-0.100	1.6	21.4°C
Rear Side	20525/836.5	50%RB#13	0.612	0.356	0.080	1.6	21.4°C
Left Side	20525/836.5	50%RB#13	0.099	0.069	0.110	1.6	21.4°C
Right Side	20525/836.5	50%RB#13	0.412	0.254	0.040	1.6	21.4°C
10M QPSK							
Front Side	20450/829	1RB#0	0.625	0.388	0.030	1.6	21.4°C
Rear Side	20450/829	1RB#0	0.607	0.352	-0.140	1.6	21.4°C
Left Side	20450/829	1RB#0	0.112	0.079	-0.010	1.6	21.4°C
Right Side	20450/829	1RB#0	0.389	0.240	-0.060	1.6	21.4°C
10M QPSK							
Front Side	20525/836.5	1RB#49	0.650	0.405	0.170	1.6	21.4°C
Rear Side	20525/836.5	1RB#49	0.628	0.364	0.180	1.6	21.4°C
Left Side	20525/836.5	1RB#49	0.098	0.068	0.130	1.6	21.4°C
Right Side	20525/836.5	1RB#49	0.387	0.235	-0.190	1.6	21.4°C
10M 16QAM							
Front Side	20525/836.5	50%RB#13	0.510	0.317	0.150	1.6	21.4°C
Rear Side	20525/836.5	50%RB#13	0.548	0.315	-0.160	1.6	21.4°C
Left Side	20525/836.5	50%RB#13	0.085	0.058	-0.180	1.6	21.4°C
Right Side	20525/836.5	50%RB#13	0.320	0.193	-0.180	1.6	21.4°C
10M 16QAM							
Front Side	20450/829	1RB#0	0.567	0.352	-0.030	1.6	21.4°C
Rear Side	20450/829	1RB#0	0.602	0.352	-0.120	1.6	21.4°C
Left Side	20450/829	1RB#0	0.117	0.080	-0.080	1.6	21.4°C
Right Side	20450/829	1RB#0	0.354	0.216	0.050	1.6	21.4°C
10M 16QAM							
Front Side	20525/836.5	1RB#49	0.584	0.363	-0.170	1.6	21.4°C
Rear Side	20525/836.5	1RB#49	0.560	0.321	0.050	1.6	21.4°C
Left Side	20525/836.5	1RB#49	0.092	0.062	-0.180	1.6	21.4°C
Right Side	20525/836.5	1RB#49	0.363	0.222	0.060	1.6	21.4°C

Table 41:Test results Body SAR LTE Band V

Note: 1) The maximum SAR value of each test band is marked **bold**.

2) Per KDB447498 D01, the SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.

3) The antenna is not within 1.0 cm from the tip of the dongle, so the tip of the dongle does not need to be tested.

4) The SAR level for the horizontal position is < 1.2W/kg, so testing at the additional position is optional.

7.2.9 Results overview of LTE Band VII

Test Position of Body with 5mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Limit (W/kg)	Liquid Temp.
			1-g	10-g			
Tested data with SAR1							
20M QPSK							
Front Side	21100/2535	50%RB#25	0.389	0.206	0.190	1.6	21.4°C
Rear Side	20850/2510	50%RB#25	1.020	0.539	0.080	1.6	21.4°C
	21100/2535	50%RB#25	0.893	0.472	0.110	1.6	21.4°C
	21350/2560	50%RB#25	0.923	0.486	0.180	1.6	21.4°C
Left Side	21100/2535	50%RB#25	0.281	0.136	-0.090	1.6	21.4°C
Right Side	21100/2535	50%RB#25	0.523	0.247	-0.090	1.6	21.4°C
20M QPSK							
Front Side	20850/2510	1RB#0	0.547	0.287	0.060	1.6	21.4°C
Rear Side	20850/2510	1RB#0	1.010	0.541	-0.040	1.6	21.4°C
Left Side	20850/2510	1RB#0	0.316	0.155	0.160	1.6	21.4°C
Right Side	20850/2510	1RB#0	0.548	0.284	-0.160	1.6	21.4°C
20M QPSK							
Front Side	20850/2510	1RB#99	0.464	0.246	0.150	1.6	21.4°C
Rear Side	20850/2510	1RB#99	0.882	0.467	0.060	1.6	21.4°C
Left Side	20850/2510	1RB#99	0.300	0.146	0.170	1.6	21.4°C
Right Side	20850/2510	1RB#99	0.473	0.241	0.080	1.6	21.4°C
20M 16QAM							
Front Side	20850/2510	50%RB#25	0.484	0.255	-0.140	1.6	21.4°C
Rear Side	20850/2510	50%RB#25	0.864	0.459	0.110	1.6	21.4°C
Left Side	20850/2510	50%RB#25	0.283	0.138	0.030	1.6	21.4°C
Right Side	20850/2510	50%RB#25	0.318	0.171	-0.130	1.6	21.4°C
20M 16QAM							
Front Side	21100/2535	1RB#0	0.424	0.224	0.150	1.6	21.4°C
Rear Side	21100/2535	1RB#0	0.801	0.429	0.150	1.6	21.4°C
Left Side	21100/2535	1RB#0	0.279	0.135	-0.030	1.6	21.4°C
Right Side	21100/2535	1RB#0	0.535	0.251	0.060	1.6	21.4°C
20M 16QAM							
Front Side	20850/2510	1RB#99	0.456	0.241	-0.100	1.6	21.4°C
Rear Side	20850/2510	1RB#99	0.890	0.476	-0.060	1.6	21.4°C
Left Side	20850/2510	1RB#99	0.293	0.142	0.170	1.6	21.4°C
Right Side	20850/2510	1RB#99	0.518	0.261	0.180	1.6	21.4°C

Table 42: Test results Body SAR LTE Band VII

Note: 1) The maximum SAR value of each test band is marked **bold**.

2) Per KDB447498 D01, the SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.

3) The antenna is not within 1.0 cm from the tip of the dongle, so the tip of the dongle does not need to be tested.

4) The SAR level for the horizontal position is < 1.2W/kg, so testing at the additional position is optional.

1) LTE band II/IV/V/VII test reduce is as below the following:

a. Per KDB941225 D05 page 4,3) A),QPSK with 50% RB is required for the highest bandwidth(20MHz).

When the maximum output power variation across H, M and L channels is $\leq 1/2$ dB, start with the middle channel; otherwise, start with the highest output power channel. When the measured 1-g SAR for the middle or highest output power channel is ≤ 0.8 W/kg, testing of the remaining two channels in that device and exposure configuration is not necessary.

LTE Band II	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Max Difference
Low Channel	18700	20	50	25	QPSK	21.59	0.39
Mid Channel	18900	20	50	25	QPSK	21.81	
High Channel	19100	20	50	25	QPSK	21.98	

→Band II, Mid channel, 20MHz BW, 50%RB#25, QPSK has been selected.

LTE Band IV	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Max Difference
Low Channel	20050	20	50	25	QPSK	21.55	0.20
Mid Channel	20175	20	50	25	QPSK	21.59	
High Channel	20300	20	50	25	QPSK	21.39	

→Band IV, Mid channel, 20MHz BW, 50%RB#25, QPSK has been selected.

LTE Band V	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Max Difference
Low Channel	20450	10	25	13	QPSK	21.67	0.18
Mid Channel	20525	10	25	13	QPSK	21.70	
High Channel	20600	10	25	13	QPSK	21.52	

→Band V, Mid channel, 10MHz BW, 50%RB#13, QPSK has been selected.

LTE Band VII	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Max Difference
Low Channel	20850	20	50	25	QPSK	22.26	0.17
Mid Channel	21100	20	50	25	QPSK	22.09	
High Channel	21350	20	50	25	QPSK	22.26	

→Band VII, Mid channel, 20MHz BW, 50RB#25, QPSK has been selected.

b. Per KDB941225 D05 page 4,3) B),QPSK with 1 RB for both channel edges are required for the highest bandwidth.

If the maximum average conducted output power for a 1 RB allocation is > ½ dB higher than the 50% RB allocation, instead of using the highest SAR channel measured for QPSK and 50% RB allocation, measure SAR on the highest output power channel for the 1 RB allocation.

LTE Band II	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	18700	20	1	0	QPSK	22.70	1.11
		20	50	25	QPSK	21.59	
Mid Channel	18900	20	1	0	QPSK	22.51	0.70
		20	50	25	QPSK	21.81	
High Channel	19100	20	1	0	QPSK	22.57	0.59
		20	50	25	QPSK	21.98	

➔ Band II, Low channel, 20 MHz BW, 1RB/#0, has been selected.

LTE Band IV	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20050	20	1	0	QPSK	22.30	0.66
		20	50	25	QPSK	21.55	
Mid Channel	20175	20	1	0	QPSK	22.27	0.68
		20	50	25	QPSK	21.59	
High Channel	20300	20	1	0	QPSK	22.26	0.87
		20	50	25	QPSK	21.39	

➔ Band IV, Low channel, 20 MHz BW, 1RB/#0, has been selected.

LTE Band V	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20450	10	1	0	QPSK	22.45	0.69
		10	25	13	QPSK	21.67	
Mid Channel	20525	10	1	0	QPSK	21.96	0.26
		10	25	13	QPSK	21.70	
High Channel	20600	10	1	0	QPSK	22.40	0.88
		10	25	13	QPSK	21.52	

➔ Band V, Low channel, 20 MHz BW, 1RB/#0, has been selected.

LTE Band VII	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20850	20	1	0	QPSK	22.00	-0.26
		20	50	25	QPSK	22.26	
Mid Channel	21100	20	1	0	QPSK	22.14	0.05
		20	50	25	QPSK	22.09	
High Channel	21350	20	1	0	QPSK	21.97	-0.29
		20	50	25	QPSK	22.26	

➔ Band VII, using the highest SAR channel measured in 3) A).

LTE Band II	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	18700	20	1	99	QPSK	22.78	1.19
		20	50	25	QPSK	21.59	
Mid Channel	18900	20	1	99	QPSK	22.59	0.78
		20	50	25	QPSK	21.81	
High Channel	19100	20	1	99	QPSK	21.81	-0.17
		20	50	25	QPSK	21.98	

→Band II, Low channel, 20 MHz BW, 1RB/#99, has been selected.

LTE Band IV	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20050	20	1	99	QPSK	22.51	0.96
		20	50	25	QPSK	21.55	
Mid Channel	20175	20	1	99	QPSK	22.37	0.78
		20	50	25	QPSK	21.59	
High Channel	20300	20	1	99	QPSK	22.13	0.74
		20	50	25	QPSK	21.39	

→Band IV, Low channel, 20 MHz BW, 1RB/#99, has been selected.

LTE Band V	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20450	10	1	49	QPSK	21.61	-0.06
		10	25	13	QPSK	21.67	
Mid Channel	20525	10	1	49	QPSK	22.60	0.90
		10	25	13	QPSK	21.70	
High Channel	20600	10	1	49	QPSK	22.23	0.71
		10	25	13	QPSK	21.52	

→Band V, Mid channel, 10 MHz BW, 1RB/#49, has been selected.

LTE Band VII	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20850	20	1	99	QPSK	22.60	0.34
		20	50	25	QPSK	22.26	
Mid Channel	21100	20	1	99	QPSK	22.00	-0.09
		20	50	25	QPSK	22.09	
High Channel	21350	20	1	99	QPSK	22.08	-0.18
		20	50	25	QPSK	22.26	

→Band VII, using the highest SAR channel measured in 3) A).

For measured SAR in QPSK with 1 RB is < 1.45 W/kg-> Test 1RB configuration on other channels is not required. (Refer to LTE SAR test result)

c. Per KDB941225 D05 page 4,4) A), 16QAM with 50% RB is required for the highest bandwidth.

If the maximum average conducted output power for 16QAM is more than ¼ dB higher than QPSK, apply the procedures for QPSK in 3) to test 16QAM.

If the maximum average conducted output power for 16QAM with 50% RB allocation is $> \frac{1}{2}$ dB higher than QPSK with 50% RB allocation, instead of using the highest SAR channel measured in QPSK measure SAR on the highest output power channel for 16QAM with 50% RB allocation.

LTE Band II	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	18700	20	1	99	16QAM	22.28	-0.50
		20	1	99	QPSK	22.78	
Mid Channel	18900	20	1	99	16-QAM	22.23	-0.36
		20	1	99	QPSK	22.59	
High Channel	19100	20	1	0	16-QAM	22.15	-0.42
		20	1	0	QPSK	22.57	

LTE Band II	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	18700	20	50	25	16QAM	21.04	-0.55
		20	50	25	QPSK	21.59	
Mid Channel	18900	20	50	25	16-QAM	20.87	-0.94
		20	50	25	QPSK	21.81	
High Channel	19100	20	50	25	16-QAM	21.27	-0.72
		20	50	25	QPSK	21.98	

→ Band II, using the highest SAR channel measured in 3) A).

LTE Band IV	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20050	20	1	99	16QAM	22.03	-0.48
		20	1	99	QPSK	22.51	
Mid Channel	20175	20	1	99	16-QAM	22.01	-0.36
		20	1	99	QPSK	22.37	
High Channel	20300	20	1	0	16-QAM	21.97	-0.29
		20	1	0	QPSK	22.26	

LTE Band IV	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20050	20	50	25	16QAM	20.76	-0.79
		20	50	25	QPSK	21.55	
Mid Channel	20175	20	50	25	16-QAM	20.86	-0.73
		20	50	25	QPSK	21.59	
High Channel	20300	20	50	25	16-QAM	20.56	-0.83
		20	50	25	QPSK	21.39	

→ Band IV, using the highest SAR channel measured in 3) A).

LTE Band V	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20450	10	1	49	16QAM	21.95	-0.50
		10	1	0	QPSK	22.45	
Mid Channel	20525	10	1	49	16-QAM	22.02	-0.58
		10	1	49	QPSK	22.60	
High Channel	20600	10	1	0	16-QAM	21.92	-0.48
		10	1	0	QPSK	22.40	

LTE Band V	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20450	10	25	13	16QAM	20.91	-0.76
		10	25	13	QPSK	21.67	
Mid Channel	20525	10	25	13	16-QAM	20.78	-0.92
		10	25	13	QPSK	21.70	
High Channel	20600	10	25	13	16-QAM	20.77	-0.75
		10	25	13	QPSK	21.52	

➔ Band V, using the highest SAR channel measured in 3) A).

LTE Band VII	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20850	20	1	99	16-QAM	22.48	-0.12
		20	1	99	QPSK	22.60	
Mid Channel	21100	20	1	0	16-QAM	22.27	0.13
		20	1	0	QPSK	22.14	
High Channel	21350	20	1	99	16-QAM	22.20	-0.06
		20	50	25	QPSK	22.26	

LTE Band VII	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20850	20	50	25	16-QAM	22.27	0.01
		20	50	25	QPSK	22.26	
Mid Channel	21100	20	50	25	16-QAM	21.24	-0.85
		20	50	25	QPSK	22.09	
High Channel	21350	20	50	25	16-QAM	21.45	-0.81
		20	50	25	QPSK	22.26	

➔ Band VII, using the highest SAR channel measured in 3) A).

d. Per KDB941225 D05 page 4,4) B) Measure SAR in 16QAM with 1 RB allocated at the high end of the channel edge using the SAR channel measured in A); and then repeat the measurement at the low end of the channel edge.

If the maximum average conducted output power for a 1 RB allocation is > ½ dB higher than the 50% RB allocation, instead of using the highest SAR channel measured for 16QAM and 50% RB measure SAR on the highest output power channel for the 1 RB allocation.

LTE Band II	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	18700	20	1	0	16QAM	22.12	0.98
		20	50	25	16QAM	21.04	
Mid Channel	18900	20	1	0	16QAM	22.16	1.29
		20	50	25	16QAM	20.87	
High Channel	19100	20	1	0	16QAM	22.15	0.88
		20	50	25	16QAM	21.27	

➔ Band II, Mid channel, 20 MHz BW, 1RB/#0, has been selected.

LTE Band IV	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20050	20	1	0	16QAM	21.72	0.96
		20	50	25	16QAM	20.76	
Mid Channel	20175	20	1	0	16QAM	21.96	1.10
		20	50	25	16QAM	20.86	
High Channel	20300	20	1	0	16QAM	21.97	1.41
		20	50	25	16QAM	20.56	

➔ Band IV, High channel, 20 MHz BW, 1RB/#0, has been selected.

LTE Band V	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20450	10	1	0	16QAM	21.85	0.94
		10	25	13	16QAM	20.91	
Mid Channel	20525	10	1	0	16QAM	21.51	0.73
		10	25	13	16QAM	20.78	
High Channel	20600	10	1	0	16QAM	21.82	1.15
		10	25	13	16QAM	20.77	

➔ Band V, Low channel, 10 MHz BW, 1RB/#0, has been selected.

LTE Band VII	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20850	20	1	0	16-QAM	21.95	0.65
		20	50	25	16-QAM	21.27	
Mid Channel	21100	20	1	0	16-QAM	22.27	1.03
		20	50	25	16-QAM	21.24	
High Channel	21350	20	1	0	16-QAM	22.08	0.63
		20	50	25	16-QAM	21.45	

➔ Band VII, Mid channel, 20 MHz BW, 1RB/#0, has been selected.

LTE Band II	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	18700	20	1	99	16QAM	22.22	1.24
		20	50	25	16QAM	21.04	
Mid Channel	18900	20	1	99	16QAM	22.23	1.36
		20	50	25	16QAM	20.87	
High Channel	19100	20	1	99	16QAM	21.47	1.20
		20	50	25	16QAM	21.27	

➔ Band II, Mid channel, 20 MHz BW, 1RB/#99, has been selected.

LTE Band IV	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20050	20	1	99	16QAM	22.03	1.27
		20	50	25	16QAM	20.76	
Mid Channel	20175	20	1	99	16QAM	22.01	1.15
		20	50	25	16QAM	20.86	
High Channel	20300	20	1	99	16QAM	21.81	1.25
		20	50	25	16QAM	20.56	

➔ Band IV, Low channel, 20 MHz BW, 1RB/#99 has been selected.

LTE Band V	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20450	10	1	49	16QAM	21.95	1.04
		10	25	13	16QAM	20.91	
Mid Channel	20525	10	1	49	16QAM	22.02	1.24
		10	25	13	16QAM	20.78	
High Channel	20600	10	1	49	16QAM	21.74	0.97
		10	25	13	16QAM	20.77	

➔ Band V, Mid channel, 10 MHz BW, 1RB/#49, has been selected.

LTE Band VII	Uplink Channel Number	BW [MHz]	RB Size	RB Offset	Mod	Max Conducted Power (dBm)	Difference
Low Channel	20850	20	1	99	16-QAM	22.48	1.21
		20	50	25	16-QAM	21.27	
Mid Channel	21100	20	1	99	16-QAM	22.06	0.82
		20	50	25	16-QAM	21.24	
High Channel	21350	20	1	99	16-QAM	22.20	0.75
		20	50	25	16-QAM	21.45	

➔ Band VII, Low channel, 20 MHz BW, 1RB/#99, has been selected.

For measured SAR in QPSK with 1 RB is < 1.45 W/kg-> Test 1RB configuration on other channels is not required. (Refer to LTE SAR test result)

e. Per KDB941225 D05 page 5,5) B), 5MHz/10MHz/15MHz BW is not required to be tested since the smaller channel bandwidth maximum average conducted power is within ½ dB, higher or lower, for 20MHz BW and SAR is < 1.45 W/kg.

LTE Band II	20MHz	15MHz	10MHz	5MHz
Max Power	22.78	22.70	22.54	22.43
Difference	/	-0.08	-0.24	-0.35

LTE Band IV	20MHz	15MHz	10MHz	5MHz
Max Power	22.51	22.58	22.45	22.52
Difference	/	0.07	-0.06	0.01

LTE Band V	10MHz	5MHz
Max Power	22.60	22.68
Difference	/	0.08

LTE Band VII	20MHz	10MHz	5MHz
Max Power	22.60	22.34	22.27
Difference	/	-0.26	-0.33

Therefore: LTE Band II/IV/V/VII cannot be tested in the smaller channel bandwidth of QPSK/16QAM.

7.3 simultaneous transmission SAR

GSM&UMTS<E mode can not work at the same time. Only one mode can work at a time. No Simultaneous transmission mode is provided for the device. Therefore, simultaneous transmission SAR is not required.

Appendix A. System Check Plots
(Pls See Appendix A.)

Appendix B. SAR Measurement Plots
(Pls See Appendix B.)

Appendix C. Calibration Certificate
(Pls See Appendix C.)

Appendix D. Photo documentation
(Pls See Appendix D.)

End