

# FCC Radio Test Report

## FCC ID: QISNHZ-W09

This report concerns (check one): Original Grant Class II Change

**Project No.** : 1602C122  
**Equipment** : HUAWEI MateBook  
**Model Name** : HZ-W09  
**Applicant** : Huawei Technologies Co., Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

**Date of Receipt** : Feb. 26, 2016  
**Date of Test** : Feb. 26, 2016 ~ Mar. 21, 2016  
**Issued Date** : Mar. 22, 2016  
**Tested by** : BTL Inc.

**Testing Engineer** : Shawn Xiao  
(Shawn Xiao)

**Technical Manager** : David Mao  
(David Mao)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

# **B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>1 . CERTIFICATION</b>	<b>5</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
<b>3 . GENERAL INFORMATION</b>	<b>7</b>
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	9
<b>4 . EMC EMISSION TEST</b>	<b>11</b>
4.1 RADIATED EMISSION MEASUREMENT	11
4.1.1 RADIATED EMISSION LIMITS	11
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	12
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 EUT TEST CONDITIONS	13
4.1.7 TEST RESULTS (9K TO 30MHz)	14
4.1.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	14
4.1.9 TEST RESULTS (ABOVE 1000 MHz)	14
<b>5 . MEASUREMENT INSTRUMENTS LIST</b>	<b>15</b>
<b>ATTACHMENT A - RADIATED EMISSION (9KHZ TO 30MHZ)</b>	<b>16</b>
<b>ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>	<b>21</b>
<b>ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)</b>	<b>70</b>

### REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1602C122	Original Issue.	Mar. 22, 2016

## 1. CERTIFICATION

Equipment : HUAWEI MateBook  
Brand Name : HUAWEI  
Model Name : HZ-W09  
Applicant : Huawei Technologies Co., Ltd.  
Manufacturer : Huawei Technologies Co., Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Date of Test : Feb. 26, 2016 ~ Mar. 21, 2016  
Test Sample : Engineering Sample  
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1602C122) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E			
Standard(s) Section	Test Item	Judgment	Remark
15.407(a)	Radiated Emissions	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

### 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.  
BTL's test firm number for FCC: 319330

### 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2 .The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%**.

A. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MateBook	
Brand Name	HUAWEI	
Model Name	HZ-W09	
Mode Different	N/A	
Product Description	Operation Frequency	UNII-1: 5150-5250MHz UNII-2A: 5250-5350MHz UNII-2C: 5470-5725MHz UNII-3: 5725-5850MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	300Mbps
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO., LTD. (2) SALCOMP (SHENZHEN) Co., Ltd. Model: HW-59C200UHPQ1 #2 Supplied from battery.	
Power Rating	#1 I/P: 100V~240V~ 50/60 Hz, 1.0A O/P: 5V $\equiv$ 2A or 9V $\equiv$ 2A or 12V $\equiv$ 2A #2 DC 7.60V 4300mAh	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.

Item	Mfr/Brand	Model.
Battery	Sunwoda Electronic Co., LTD	HB25B7N4EBC
	SCUD (FUJIAN) Electronics Co., Ltd	
	Harbin Coslight Power Co., Ltd.	
Portfolio Keyboard	HUAWEI	AF20
Mate Pen	HUAWEI	AF61

3. Channel List:

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-3		UNII-3		UNII-3	
\Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX A Mode/ CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode/ CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode/ CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 8	TX N20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N40 Mode/ CH54, CH62 (UNII-2A)
Mode 10	TX AC20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 11	TX AC40 Mode/ CH54, CH62 (UNII-2A)
Mode 12	TX AC80 Mode / CH58 (UNII-2A)
Mode 13	TX A Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 14	TX N20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 15	TX N40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 16	TX AC20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 17	TX AC40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 18	TX AC80 Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 20	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 21	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 22	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC80 Mode / CH155 (UNII-3)

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode/ CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode/ CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode/ CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 8	TX N20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N40 Mode/ CH54, CH62 (UNII-2A)
Mode 10	TX AC20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 11	TX AC40 Mode/ CH54, CH62 (UNII-2A)
Mode 12	TX AC80 Mode / CH58 (UNII-2A)
Mode 13	TX A Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 14	TX N20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 15	TX N40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 16	TX AC20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 17	TX AC40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 18	TX AC80 Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 20	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 21	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 22	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC80 Mode / CH155 (UNII-3)

**Note:**

(1) For radiated below 1GHz test, the 802.11a mode is found to be the worst case and recorded.

## 4. EMC EMISSION TEST

### 4.1 RADIATED EMISSION MEASUREMENT

#### 4.1.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.

#### LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB $\mu$ V/m)	Equivalent Field Strength at 1.5m (dB $\mu$ V/m)
5150-5250	-27	68.3	74.3 (Note 2)
5250-5350	-27	68.3	74.3 (Note 2)
5470-5725	-27	68.3	74.3 (Note 2)
5725-5850	-27 (beyond 10MHz of the band edge)	68.3	74.3 (Note 2)
	-17 (within 10 MHz of band edge)	78.3	84.3 (Note 2)

Note: 1. The following formula is used to convert the equipment isotropic radiated power (eirp) to

field strength:  $E = \frac{1000000 \sqrt{30P}}{3}$   $\mu$ V/m, where P is the eirp (Watts)

2. 20LOG d limit/d measure=20log 3/1.5=6dB.

#### 4.1.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- f. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.1.4 TEST SETUP


##### (A) Radiated Emission Test Set-Up Frequency 30 - 1000MHz

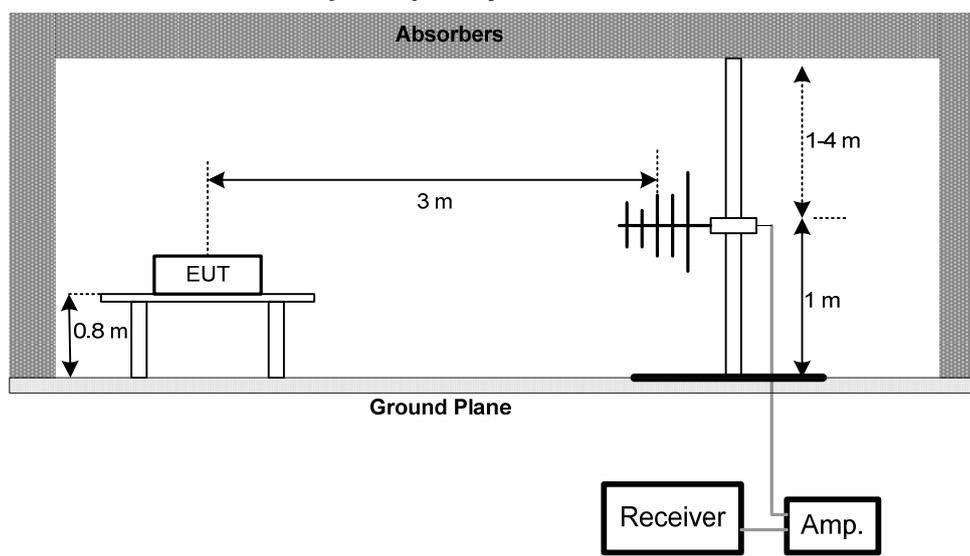

**(B) Radiated Emission Test Set-Up Frequency Above 1 GHz**

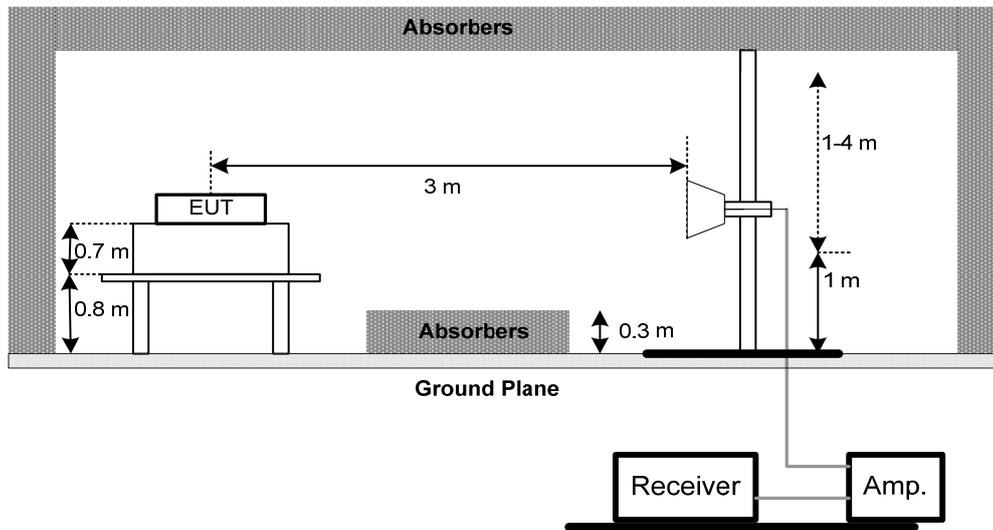

**(C) Radiated emissions below 30MHz**

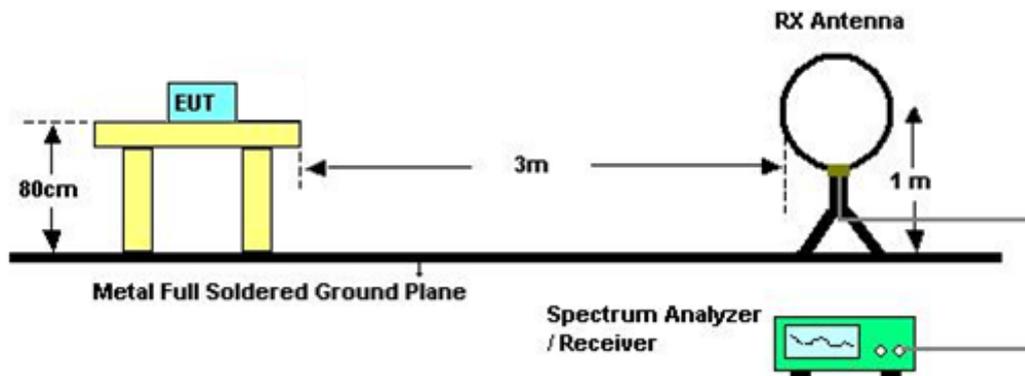

**4.1.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

**4.1.6 EUT TEST CONDITIONS**

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: AC 120V/60Hz

**4.1.7 TEST RESULTS (9K TO 30MHz)**

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

**4.1.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)**

Please refer to the Attachment C.

**4.1.9 TEST RESULTS (ABOVE 1000 MHz)**

Please refer to the Attachment D.

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (2) Data of measurement within this frequency range shown " \* " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (4) EUT Orthogonal Axes:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (5) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (6) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. MEASUREMENT INSTRUMENTS LIST


Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 28, 2016
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 28, 2016
5	Antenna	ETS	3115	00075789	Mar. 28, 2016
6	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
7	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
8	Test Cable	emci	EMC104-SM-S M-10000(1GHz - 26.5GHz)	C-68	Jun. 28, 2016
9	Controller	CT	SC100	N/A	N/A
10	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Mar. 28, 2016
11	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 28, 2016
12	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 07, 2016
13	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

## ATTACHMENT A - RADIATED EMISSION (9KHZ TO 30MHZ)


Test Mode: TX A Mode 5180MHz

Ant0°

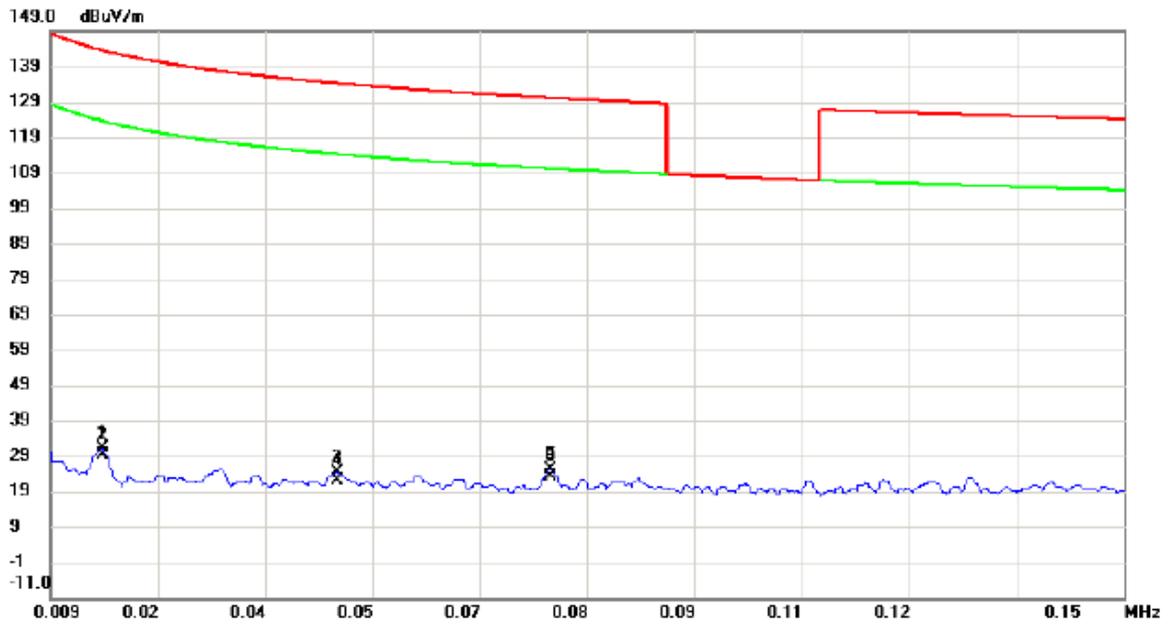

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0158	9.67	21.40	31.07	143.63	-112.56	peak	
2		0.0158	7.65	21.40	29.05	123.63	-94.58	AVG	
3		0.0466	2.64	21.59	24.23	134.24	-110.01	peak	
4		0.0466	0.23	21.59	21.82	114.24	-92.42	AVG	
5		0.0747	4.00	21.04	25.04	130.14	-105.10	peak	
6	*	0.0747	2.14	21.04	23.18	110.14	-86.96	AVG	

### Ant90°

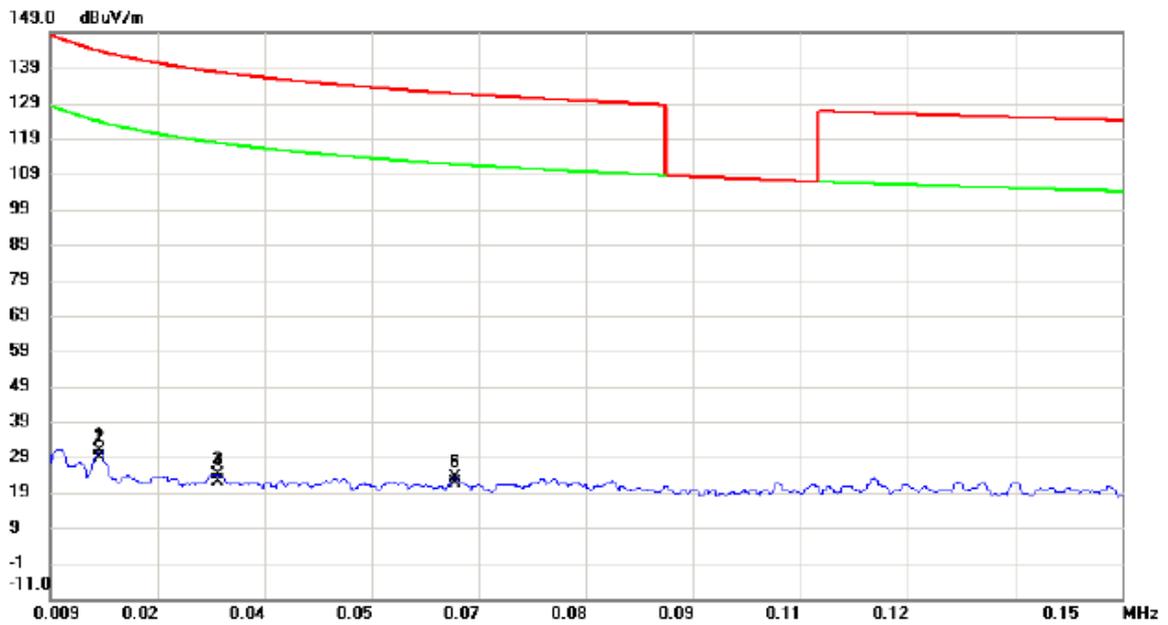


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0154	9.39	21.40	30.79	143.85	-113.06	peak	
2		0.0154	7.23	21.40	28.63	123.85	-95.22	AVG	
3		0.0310	2.70	21.43	24.13	137.78	-113.65	peak	
4		0.0310	0.52	21.43	21.95	117.78	-95.83	AVG	
5		0.0623	2.06	21.33	23.39	131.72	-108.33	peak	
6	*	0.0623	0.14	21.33	21.47	111.72	-90.25	AVG	

### Ant0°



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.4485	22.65	20.98	43.63	114.57	-70.94	peak	
2		0.4485	18.32	20.98	39.30	94.57	-55.27	AVG	
3	*	2.3290	25.32	21.77	47.09	69.54	-22.45	QP	
4		13.1646	15.20	22.20	37.40	69.54	-32.14	QP	

### Ant90°

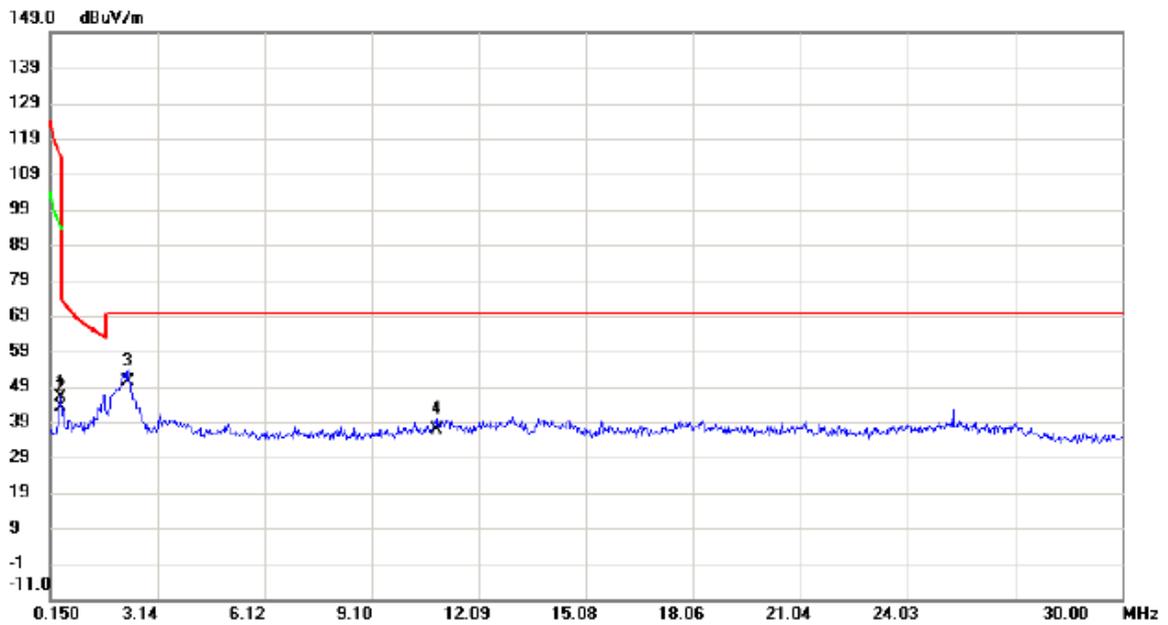


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.4485	24.99	20.98	45.97	114.57	-68.60	peak	
2		0.4485	22.15	20.98	43.13	94.57	-51.44	AVG	
3	*	2.3290	28.53	21.77	50.30	69.54	-19.24	QP	
4		10.8960	15.24	21.73	36.97	69.54	-32.57	QP	

**ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)**

### For ANT 1

Test Mode: UNII-1/TX A Mode 5180MHz


#### Vertical

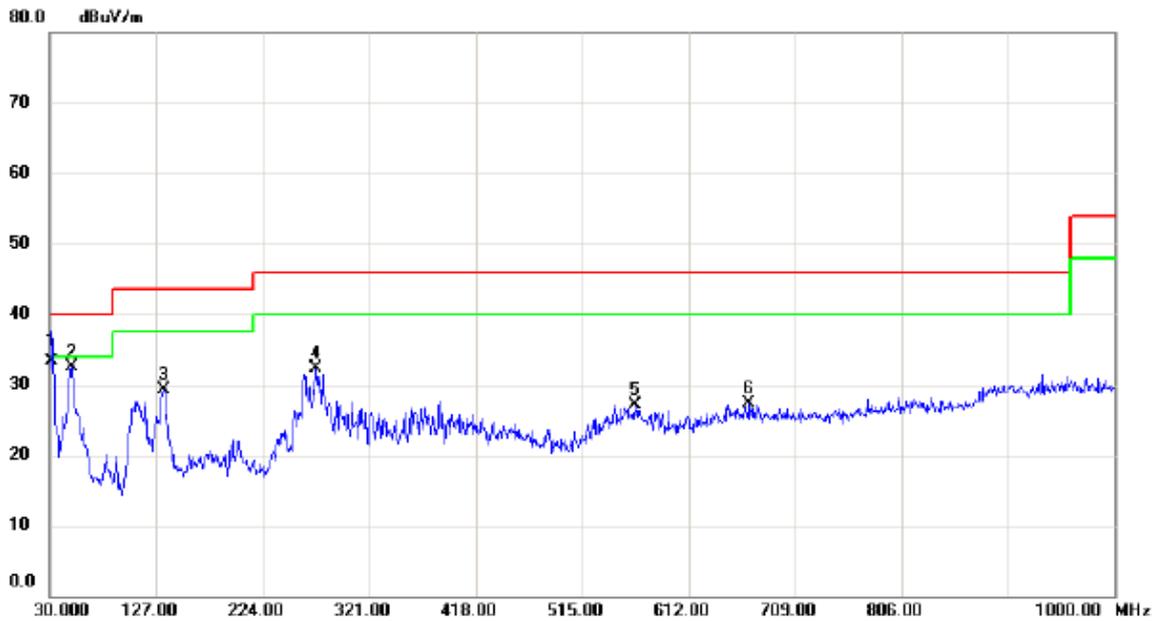

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	47.21	-13.89	33.32	40.00	-6.68	QP	
2		49.4000	44.99	-12.43	32.56	40.00	-7.44	peak	
3		133.7900	40.92	-11.53	29.39	43.50	-14.11	peak	
4		272.5000	43.81	-11.60	32.21	46.00	-13.79	peak	
5		563.5000	31.70	-4.62	27.08	46.00	-18.92	peak	
6		667.2900	28.83	-1.58	27.25	46.00	-18.75	peak	

Test Mode: UNII-1/TX A Mode 5180MHz


Horizontal

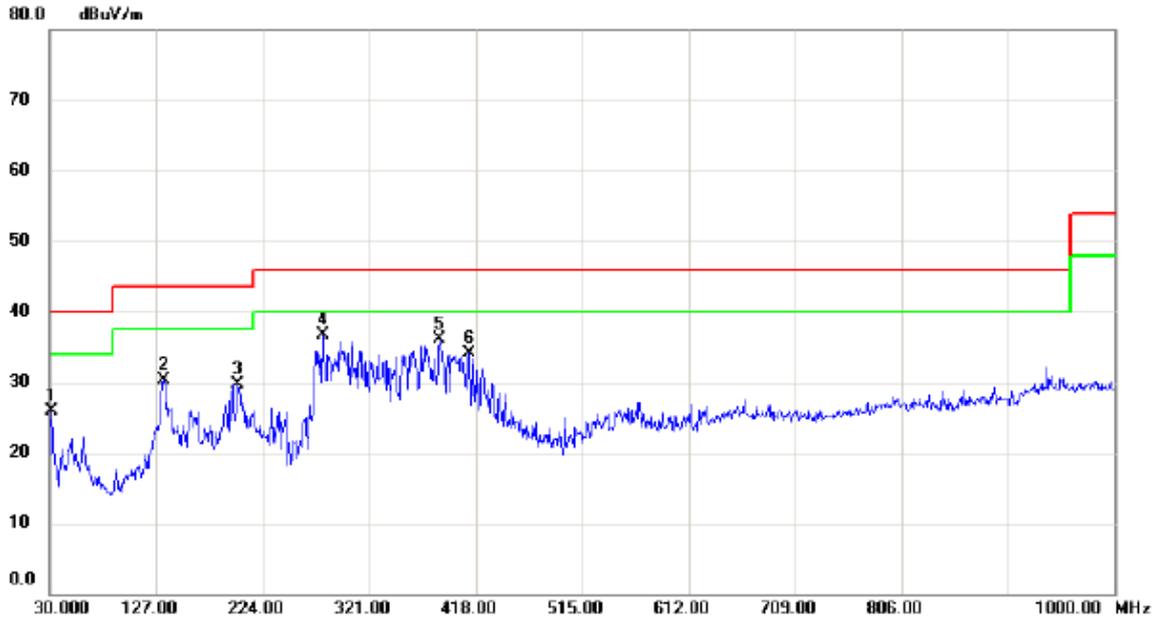

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.9400	39.77	-13.89	25.88	40.00	-14.12	peak	
2		133.7900	41.91	-11.53	30.38	43.50	-13.12	peak	
3		201.6900	43.26	-13.59	29.67	43.50	-13.83	peak	
4	*	278.3200	47.81	-11.19	36.62	46.00	-9.38	peak	
5		385.0200	44.17	-8.06	36.11	46.00	-9.89	peak	
6		412.1800	41.04	-6.92	34.12	46.00	-11.88	peak	

Test Mode: UNII-1/TX A Mode 5240MHz

Vertical

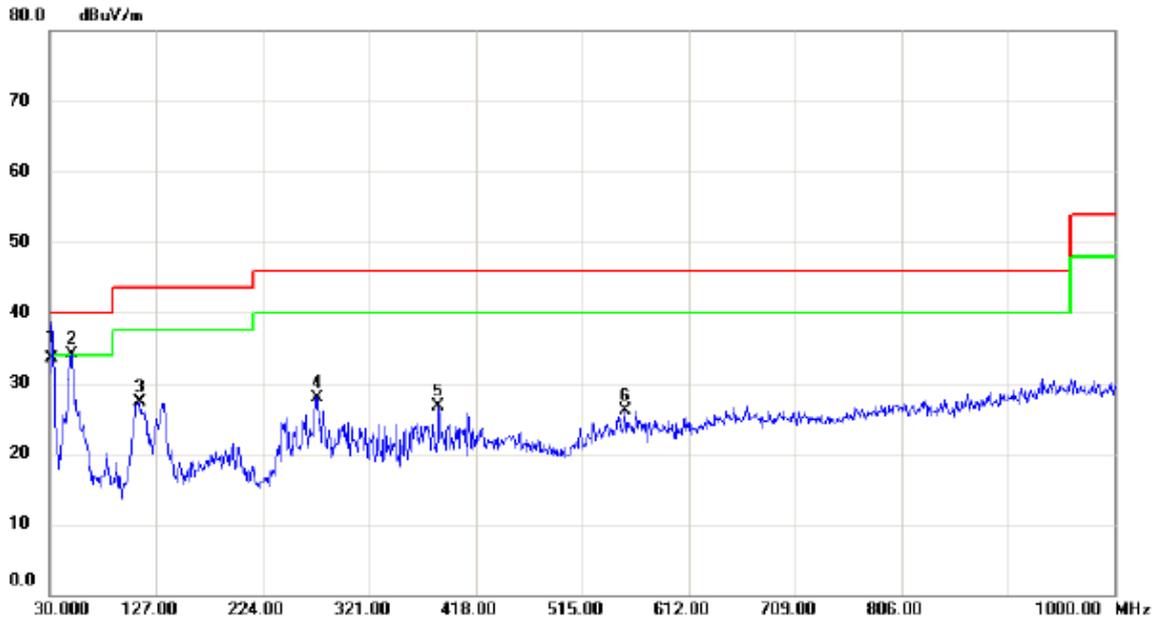

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.9400	47.35	-13.89	33.46	40.00	-6.54	QP	
2	*	49.4000	46.51	-12.43	34.08	40.00	-5.92	peak	
3		112.4500	40.74	-13.50	27.24	43.50	-16.26	peak	
4		273.4700	39.43	-11.54	27.89	46.00	-18.11	peak	
5		384.0500	34.83	-8.12	26.71	46.00	-19.29	peak	
6		554.7700	30.74	-4.62	26.12	46.00	-19.88	peak	

Test Mode: UNII-1/TX A Mode 5240MHz


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		133.7900	38.08	-11.53	26.55	43.50	-16.95	peak	
2		201.6900	41.61	-13.59	28.02	43.50	-15.48	peak	
3		278.3200	46.46	-11.19	35.27	46.00	-10.73	peak	
4	*	305.4800	45.32	-9.63	35.69	46.00	-10.31	peak	
5		385.0200	43.74	-8.06	35.68	46.00	-10.32	peak	
6		658.5600	28.20	-1.61	26.59	46.00	-19.41	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz


Vertical

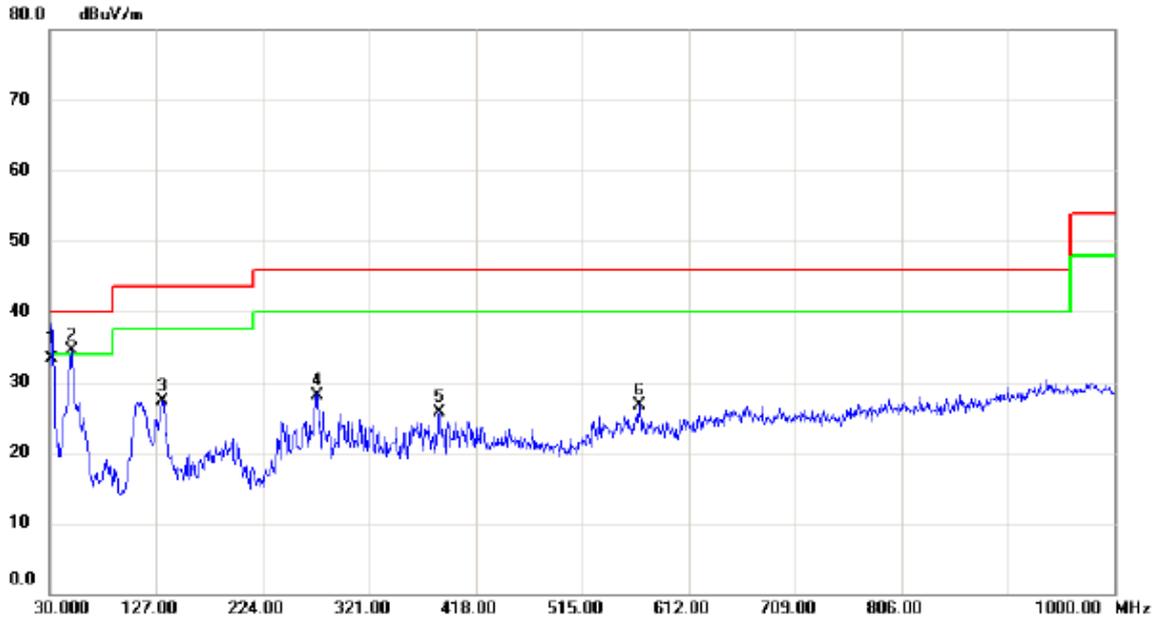

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.9400	47.12	-13.89	33.23	40.00	-6.77	QP	
2	*	49.4000	46.95	-12.43	34.52	40.00	-5.48	peak	
3		132.8200	38.88	-11.53	27.35	43.50	-16.15	peak	
4		273.4700	39.74	-11.54	28.20	46.00	-17.80	peak	
5		385.0200	33.86	-8.06	25.80	46.00	-20.20	peak	
6		567.3800	31.24	-4.63	26.61	46.00	-19.39	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz


Horizontal

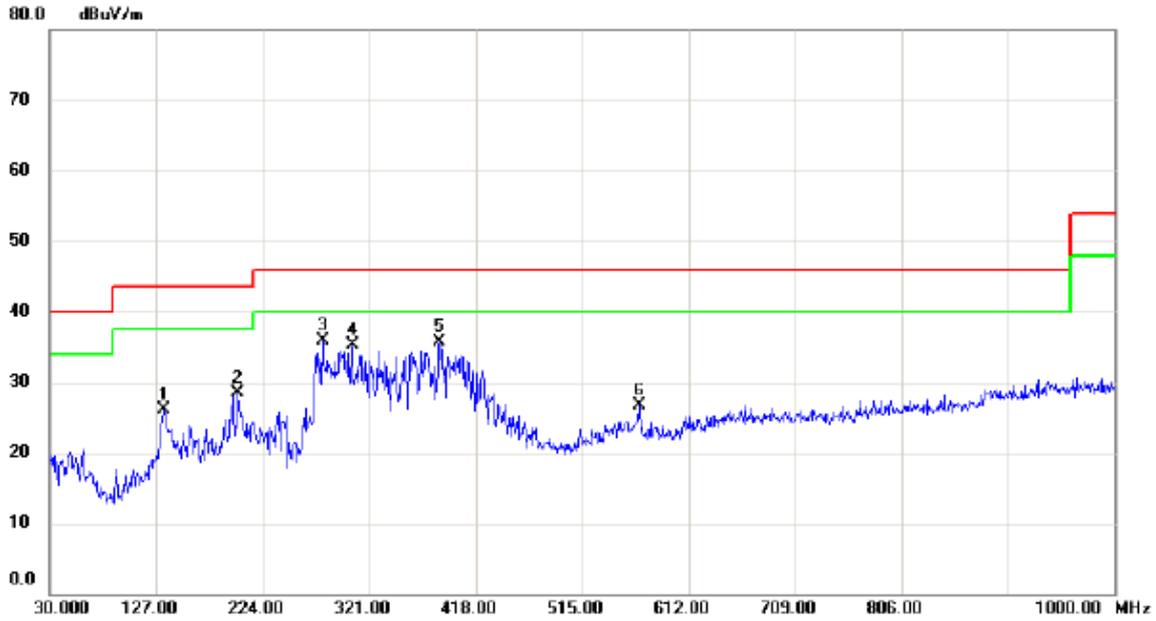

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		133.7900	37.67	-11.53	26.14	43.50	-17.36	peak	
2		201.6900	42.02	-13.59	28.43	43.50	-15.07	peak	
3	*	278.3200	47.14	-11.19	35.95	46.00	-10.05	peak	
4		305.4800	44.93	-9.63	35.30	46.00	-10.70	peak	
5		385.0200	43.68	-8.06	35.62	46.00	-10.38	peak	
6		567.3800	31.38	-4.63	26.75	46.00	-19.25	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz


Vertical

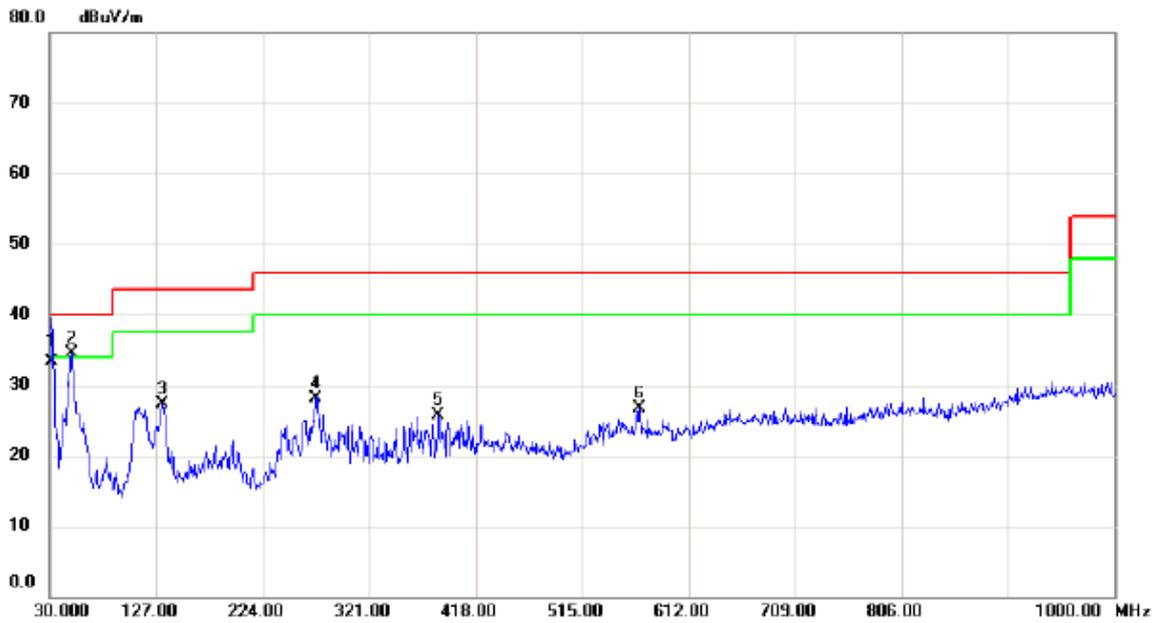

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.9400	47.29	-13.89	33.40	40.00	-6.60	QP	
2	*	49.4000	46.91	-12.43	34.48	40.00	-5.52	peak	
3		132.8200	38.91	-11.53	27.38	43.50	-16.12	peak	
4		272.5000	39.70	-11.60	28.10	46.00	-17.90	peak	
5		384.0500	33.84	-8.12	25.72	46.00	-20.28	peak	
6		567.3800	31.24	-4.63	26.61	46.00	-19.39	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz


### Horizontal

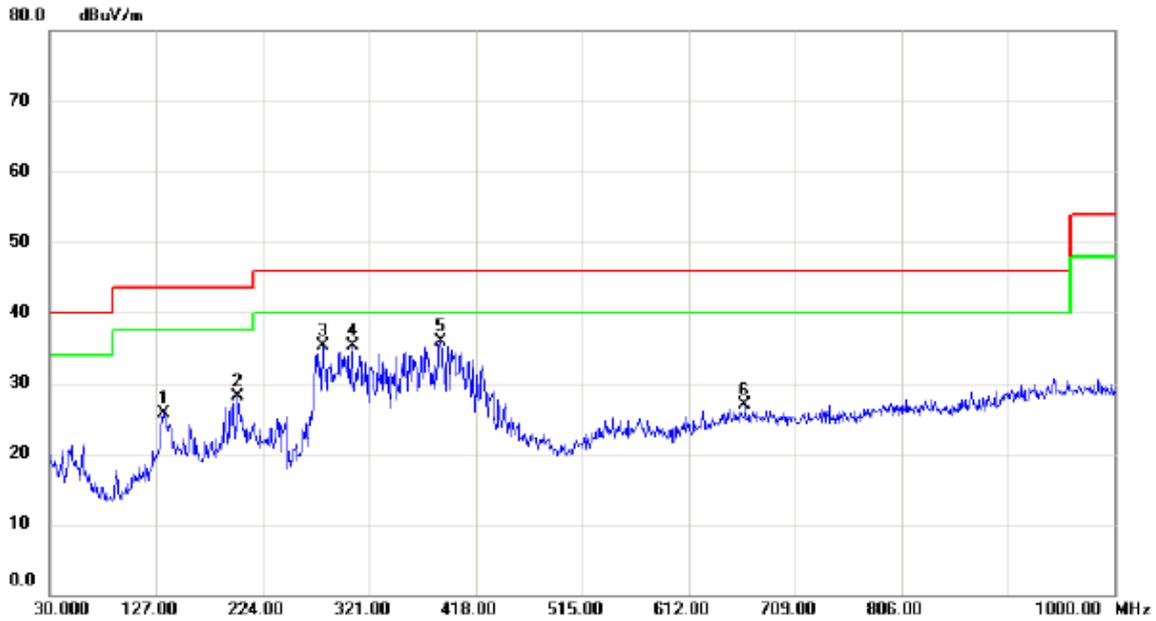

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		133.7900	37.30	-11.53	25.77	43.50	-17.73	peak	
2		201.6900	41.67	-13.59	28.08	43.50	-15.42	peak	
3		278.3200	46.59	-11.19	35.40	46.00	-10.60	peak	
4		305.4800	44.98	-9.63	35.35	46.00	-10.65	peak	
5	*	385.9900	43.85	-8.00	35.85	46.00	-10.15	peak	
6		663.4100	28.55	-1.59	26.96	46.00	-19.04	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz


Vertical

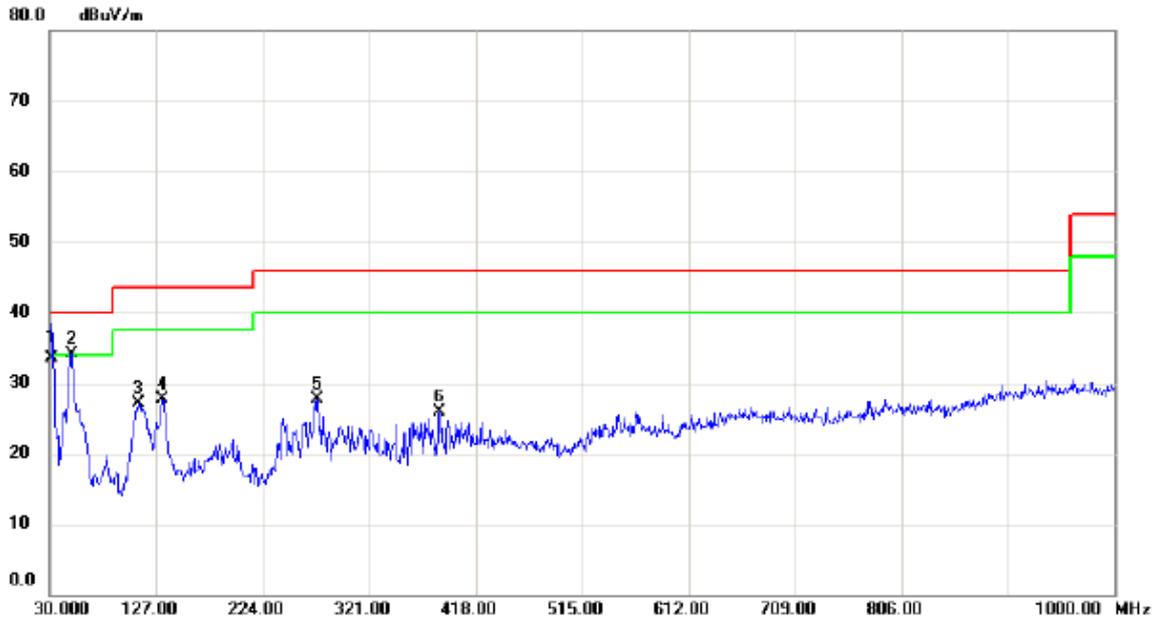

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.9400	47.42	-13.89	33.53	40.00	-6.47	QP	
2	*	49.4000	46.62	-12.43	34.19	40.00	-5.81	peak	
3		110.5100	40.84	-13.74	27.10	43.50	-16.40	peak	
4		132.8200	39.15	-11.53	27.62	43.50	-15.88	peak	
5		273.4700	39.30	-11.54	27.76	46.00	-18.24	peak	
6		385.0200	33.96	-8.06	25.90	46.00	-20.10	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz


Horizontal

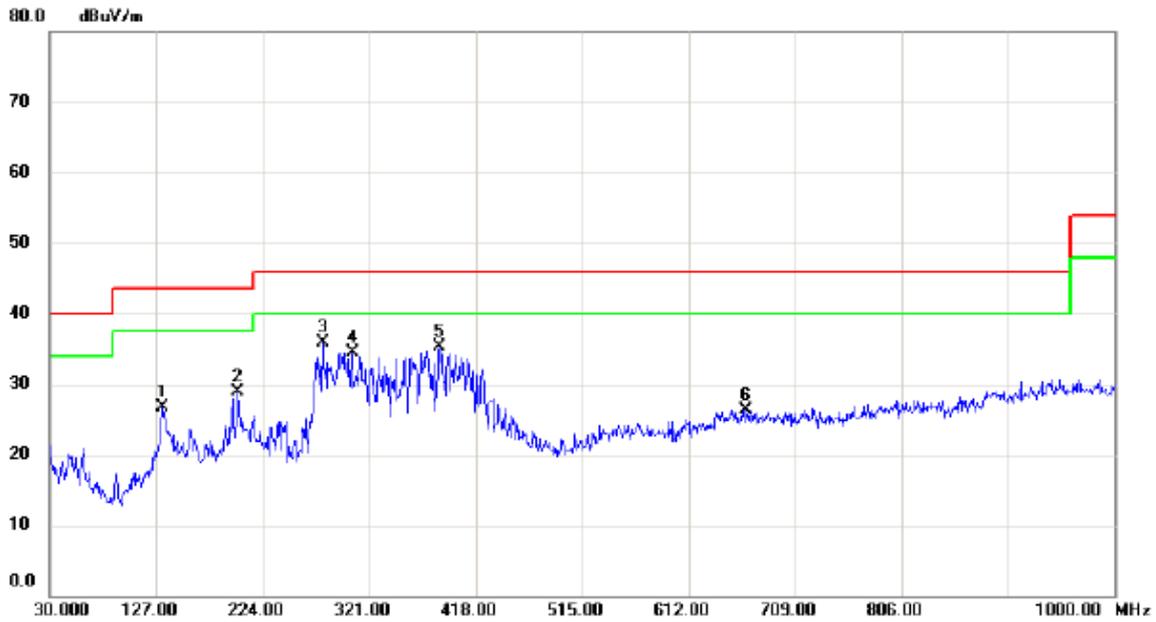

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		132.8200	38.20	-11.53	26.67	43.50	-16.83	peak	
2		201.6900	42.45	-13.59	28.86	43.50	-14.64	peak	
3	*	278.3200	47.03	-11.19	35.84	46.00	-10.16	peak	
4		305.4800	44.22	-9.63	34.59	46.00	-11.41	peak	
5		385.0200	43.34	-8.06	35.28	46.00	-10.72	peak	
6		664.3800	27.94	-1.59	26.35	46.00	-19.65	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz


Vertical

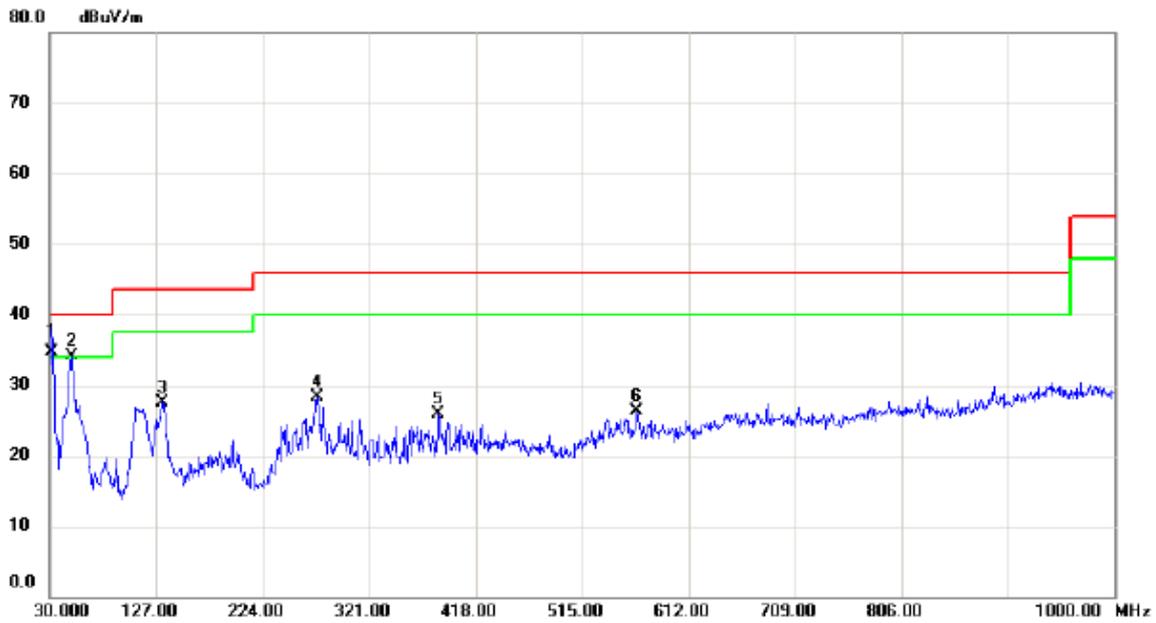

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	48.53	-13.89	34.64	40.00	-5.36	QP	
2	!	49.4000	46.54	-12.43	34.11	40.00	-5.89	peak	
3		132.8200	39.04	-11.53	27.51	43.50	-15.99	peak	
4		273.4700	39.80	-11.54	28.26	46.00	-17.74	peak	
5		384.0500	34.04	-8.12	25.92	46.00	-20.08	peak	
6		564.4700	30.91	-4.63	26.28	46.00	-19.72	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz


Horizontal

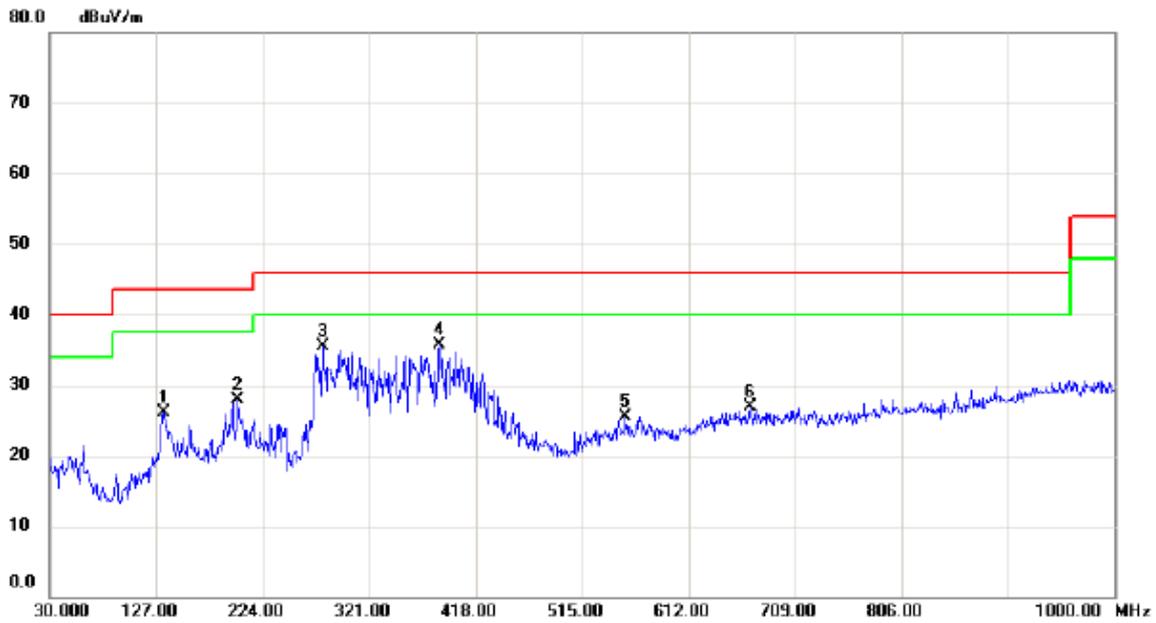

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		133.7900	37.71	-11.53	26.18	43.50	-17.32	peak	
2		200.7200	41.58	-13.58	28.00	43.50	-15.50	peak	
3		278.3200	46.65	-11.19	35.46	46.00	-10.54	peak	
4	*	385.0200	43.67	-8.06	35.61	46.00	-10.39	peak	
5		554.7700	30.20	-4.62	25.58	46.00	-20.42	peak	
6		668.2600	28.42	-1.58	26.84	46.00	-19.16	peak	

Test Mode: UNII-3/TX A Mode 5745MHz


Vertical

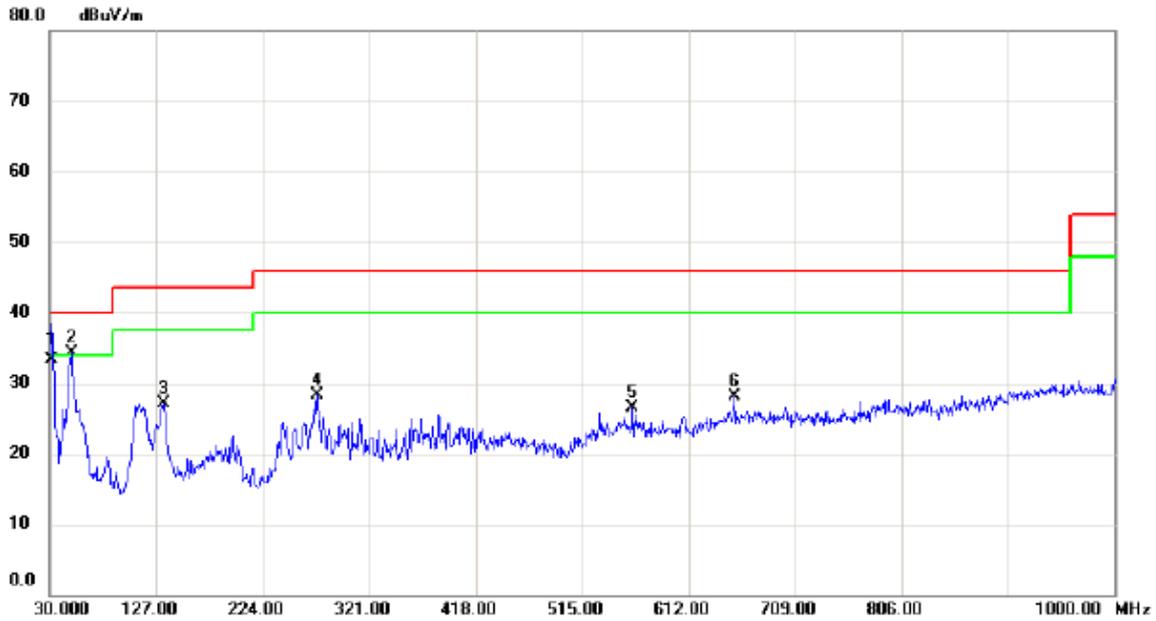

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.9400	47.25	-13.89	33.36	40.00	-6.64	QP	
2	*	49.4000	46.64	-12.43	34.21	40.00	-5.79	peak	
3		133.7900	38.66	-11.53	27.13	43.50	-16.37	peak	
4		273.4700	39.94	-11.54	28.40	46.00	-17.60	peak	
5		561.5600	31.18	-4.63	26.55	46.00	-19.45	peak	
6		653.7100	29.67	-1.63	28.04	46.00	-17.96	peak	

Test Mode: UNII-3/TX A Mode 5745MHz


### Horizontal

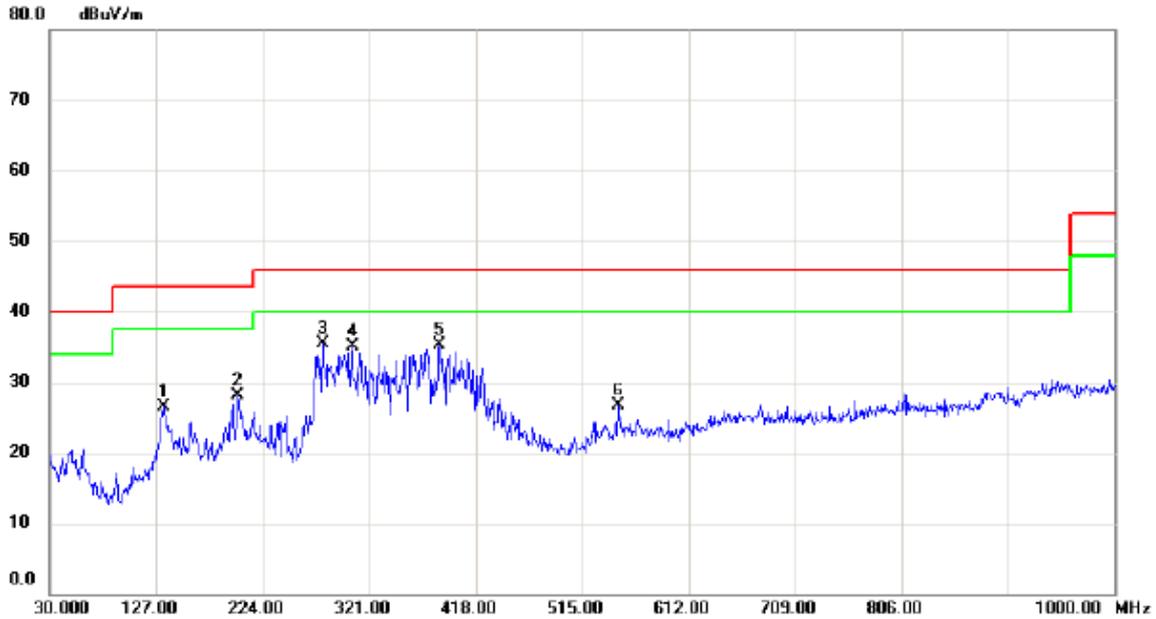

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		133.7900	38.08	-11.53	26.55	43.50	-16.95	peak	
2		201.6900	41.75	-13.59	28.16	43.50	-15.34	peak	
3	*	278.3200	46.74	-11.19	35.55	46.00	-10.45	peak	
4		305.4800	44.65	-9.63	35.02	46.00	-10.98	peak	
5		385.0200	43.45	-8.06	35.39	46.00	-10.61	peak	
6		547.9800	31.54	-4.74	26.80	46.00	-19.20	peak	

Test Mode: UNII-3/TX A Mode 5825MHz

Vertical

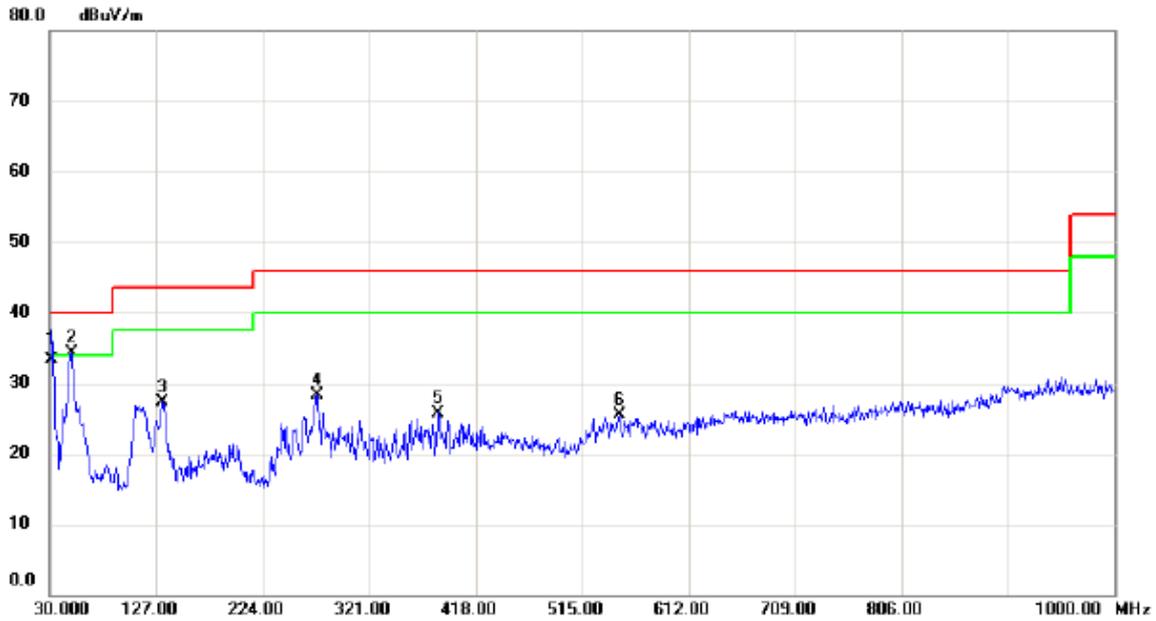

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.9400	47.20	-13.89	33.31	40.00	-6.69	QP	
2	*	49.4000	46.76	-12.43	34.33	40.00	-5.67	peak	
3		132.8200	38.85	-11.53	27.32	43.50	-16.18	peak	
4		273.4700	39.75	-11.54	28.21	46.00	-17.79	peak	
5		384.0500	33.92	-8.12	25.80	46.00	-20.20	peak	
6		549.9200	30.20	-4.62	25.58	46.00	-20.42	peak	

Test Mode: UNII-3/TX A Mode 5825MHz

### Horizontal




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		133.7900	38.00	-11.53	26.47	43.50	-17.03	peak	
2		201.6900	41.25	-13.59	27.66	43.50	-15.84	peak	
3		278.3200	45.80	-11.19	34.61	46.00	-11.39	peak	
4		305.4800	44.09	-9.63	34.46	46.00	-11.54	peak	
5	*	384.0500	43.32	-8.12	35.20	46.00	-10.80	peak	
6		652.7400	29.12	-1.63	27.49	46.00	-18.51	peak	

### For ANT 2

Test Mode: UNII-1/TX A Mode 5180MHz


#### Vertical

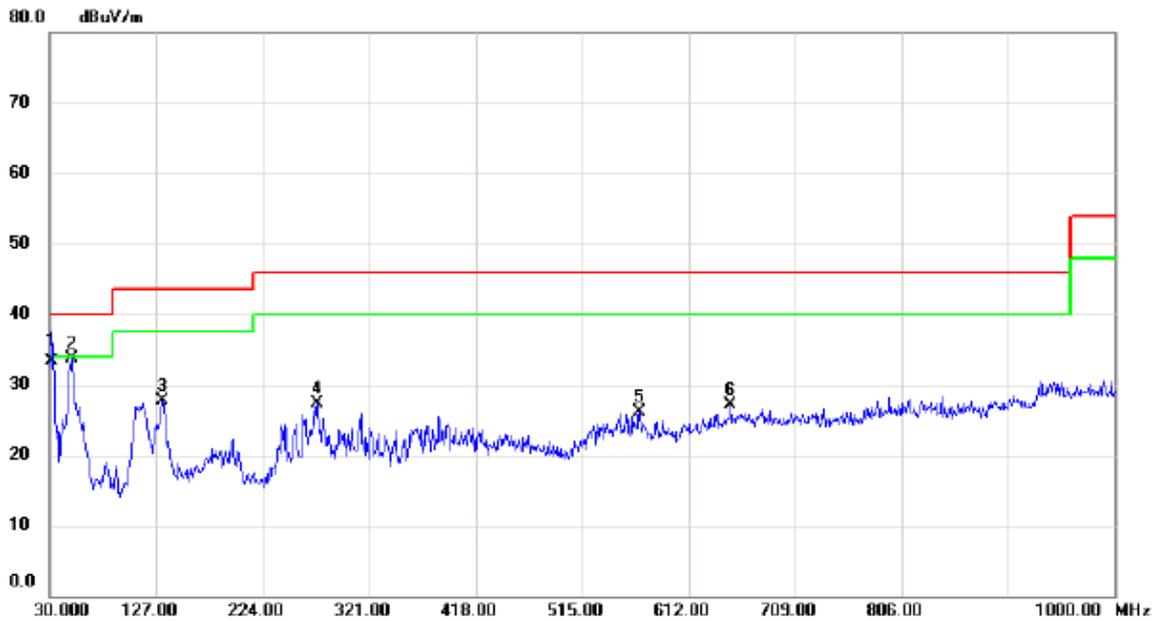

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.9400	47.28	-13.89	33.39	40.00	-6.61	QP	
2	*	49.4000	46.10	-12.43	33.67	40.00	-6.33	peak	
3		132.8200	39.20	-11.53	27.67	43.50	-15.83	peak	
4		273.4700	38.79	-11.54	27.25	46.00	-18.75	peak	
5		567.3800	30.83	-4.63	26.20	46.00	-19.80	peak	
6		650.8000	28.75	-1.64	27.11	46.00	-18.89	peak	

Test Mode: UNII-1/TX A Mode 5180MHz


Horizontal

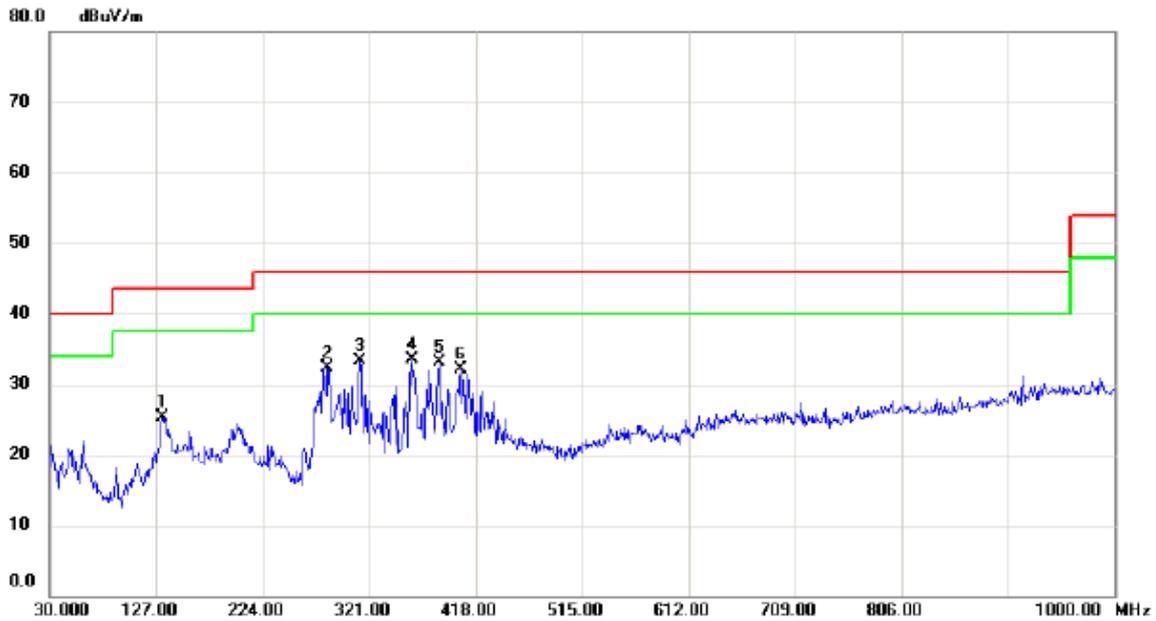

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		132.8200	36.86	-11.53	25.33	43.50	-18.17	peak	
2		283.1700	43.01	-10.67	32.34	46.00	-13.66	peak	
3		312.2700	43.00	-9.67	33.33	46.00	-12.67	peak	
4	*	359.8000	42.98	-9.40	33.58	46.00	-12.42	peak	
5		385.0200	41.16	-8.06	33.10	46.00	-12.90	peak	
6		404.4200	39.34	-7.14	32.20	46.00	-13.80	peak	

Test Mode: UNII-1/TX A Mode 5240MHz


Vertical

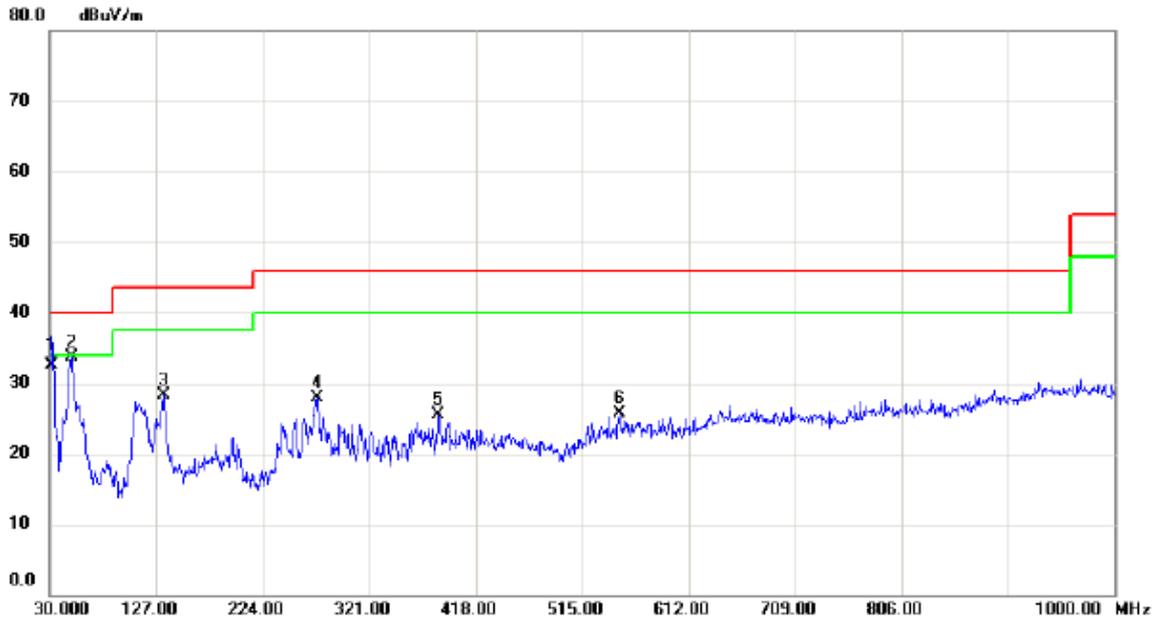

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.9400	46.40	-13.89	32.51	40.00	-7.49	QP	
2	*	49.4000	46.16	-12.43	33.73	40.00	-6.27	peak	
3		133.7900	39.76	-11.53	28.23	43.50	-15.27	peak	
4		273.4700	39.47	-11.54	27.93	46.00	-18.07	peak	
5		384.0500	33.68	-8.12	25.56	46.00	-20.44	peak	
6		549.9200	30.38	-4.62	25.76	46.00	-20.24	peak	

Test Mode: UNII-1/TX A Mode 5240MHz

### Horizontal

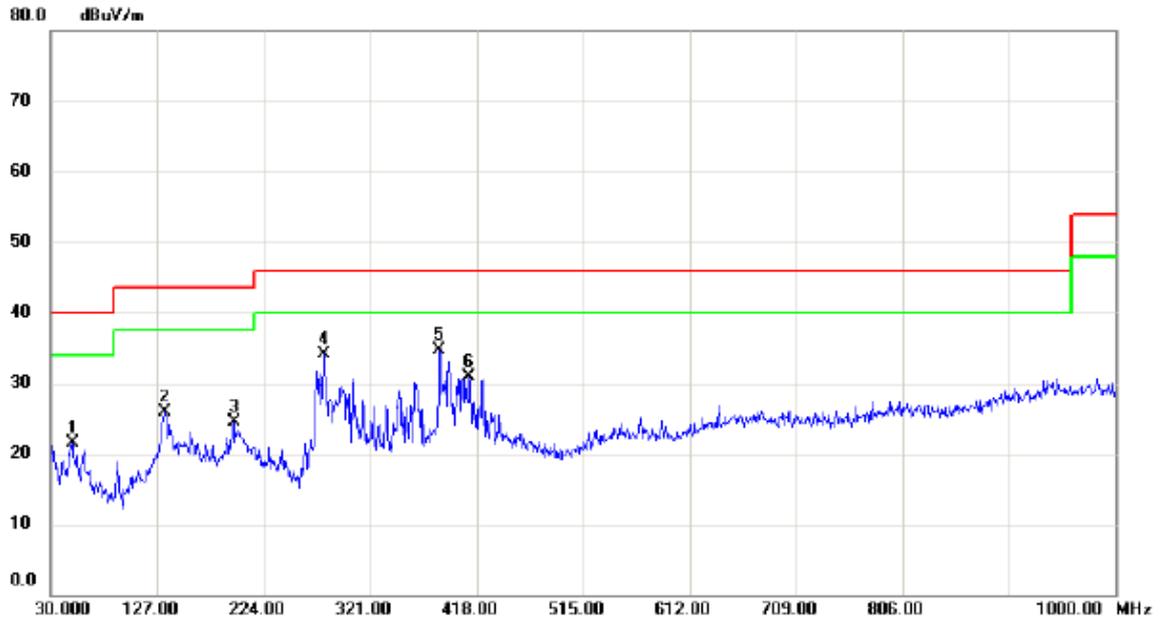

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		49.4000	33.94	-12.43	21.51	40.00	-18.49	peak	
2		133.7900	37.47	-11.53	25.94	43.50	-17.56	peak	
3		196.8400	37.98	-13.39	24.59	43.50	-18.91	peak	
4		278.3200	45.38	-11.19	34.19	46.00	-11.81	peak	
5	*	384.0500	42.83	-8.12	34.71	46.00	-11.29	peak	
6		411.2100	37.91	-6.95	30.96	46.00	-15.04	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.9400	47.34	-13.89	33.45	40.00	-6.55	QP	
2	*	49.4000	46.23	-12.43	33.80	40.00	-6.20	peak	
3		110.5100	41.86	-13.74	28.12	43.50	-15.38	peak	
4		273.4700	39.79	-11.54	28.25	46.00	-17.75	peak	
5		385.0200	33.86	-8.06	25.80	46.00	-20.20	peak	
6		563.5000	30.02	-4.62	25.40	46.00	-20.60	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz


Horizontal

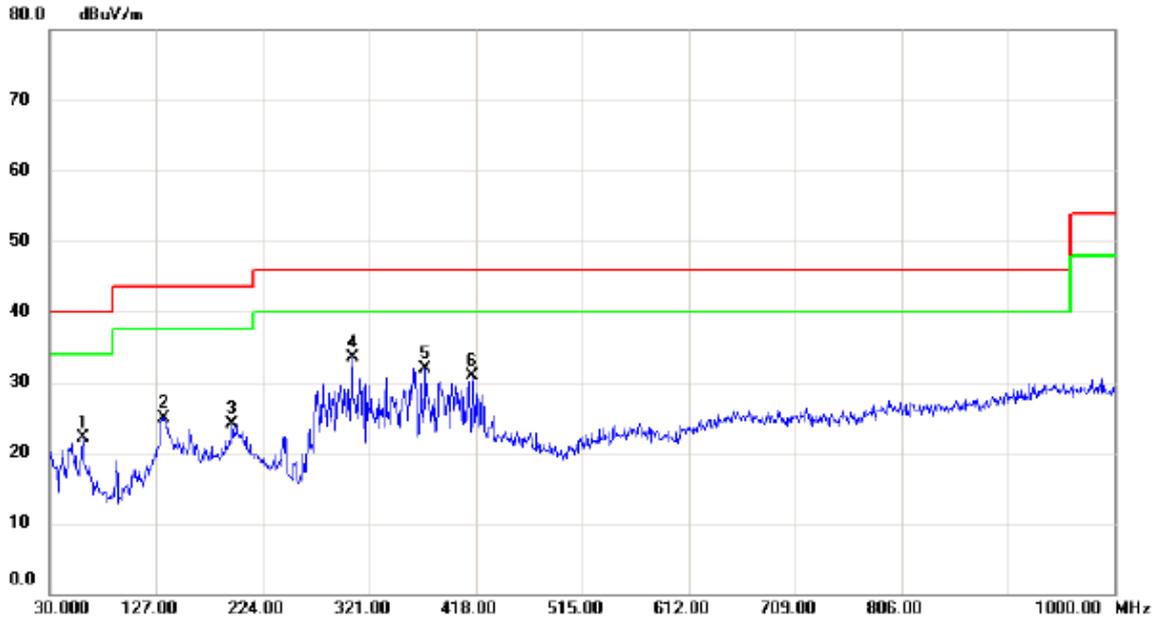

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		60.0700	35.74	-13.69	22.05	40.00	-17.95	peak	
2		133.7900	36.47	-11.53	24.94	43.50	-18.56	peak	
3		195.8700	37.47	-13.33	24.14	43.50	-19.36	peak	
4	*	305.4800	43.08	-9.63	33.45	46.00	-12.55	peak	
5		372.4100	40.65	-8.72	31.93	46.00	-14.07	peak	
6		415.0900	37.78	-6.85	30.93	46.00	-15.07	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz


Vertical

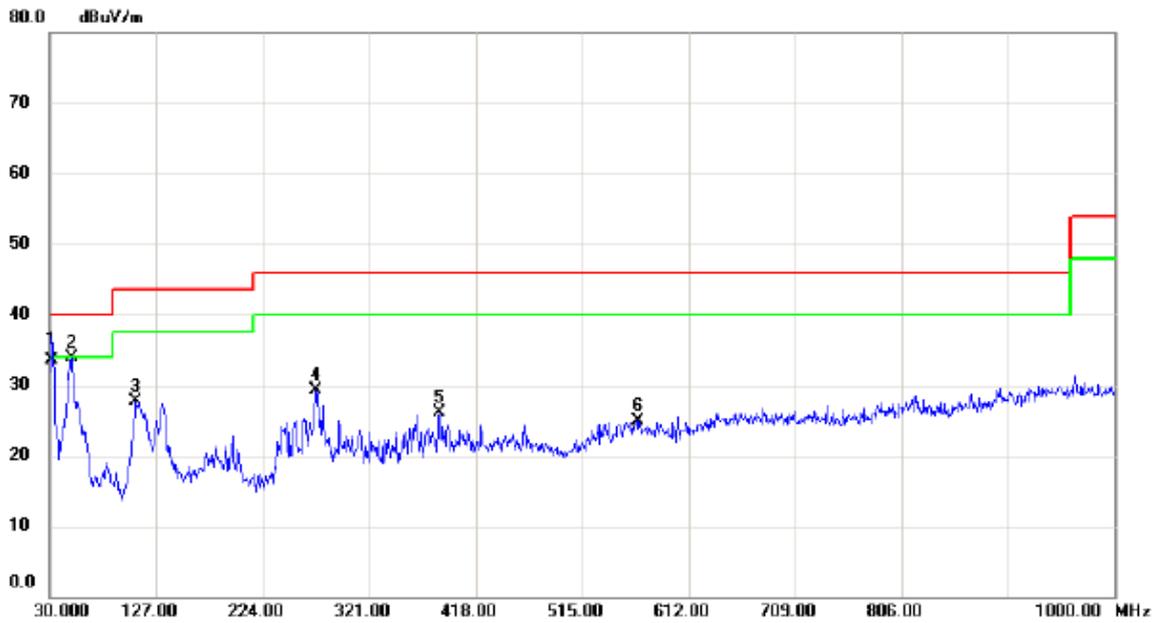

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.9400	47.38	-13.89	33.49	40.00	-6.51	QP	
2	*	49.4000	46.31	-12.43	33.88	40.00	-6.12	peak	
3		108.5700	41.55	-13.92	27.63	43.50	-15.87	peak	
4		272.5000	40.98	-11.60	29.38	46.00	-16.62	peak	
5		385.0200	34.08	-8.06	26.02	46.00	-19.98	peak	
6		565.4400	29.59	-4.63	24.96	46.00	-21.04	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz


### Horizontal

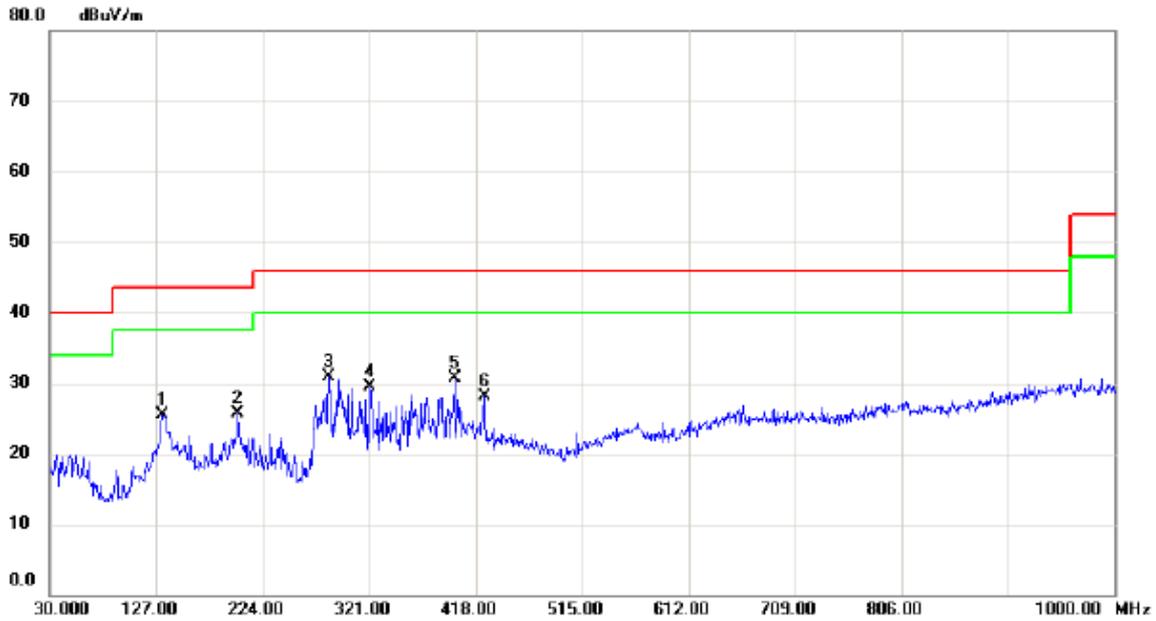

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		132.8200	37.12	-11.53	25.59	43.50	-17.91	peak	
2		201.6900	39.27	-13.59	25.68	43.50	-17.82	peak	
3	*	284.1400	41.54	-10.54	31.00	46.00	-15.00	peak	
4		321.9700	39.15	-9.72	29.43	46.00	-16.57	peak	
5		398.6000	37.98	-7.34	30.64	46.00	-15.36	peak	
6		425.7600	34.68	-6.55	28.13	46.00	-17.87	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz

Vertical

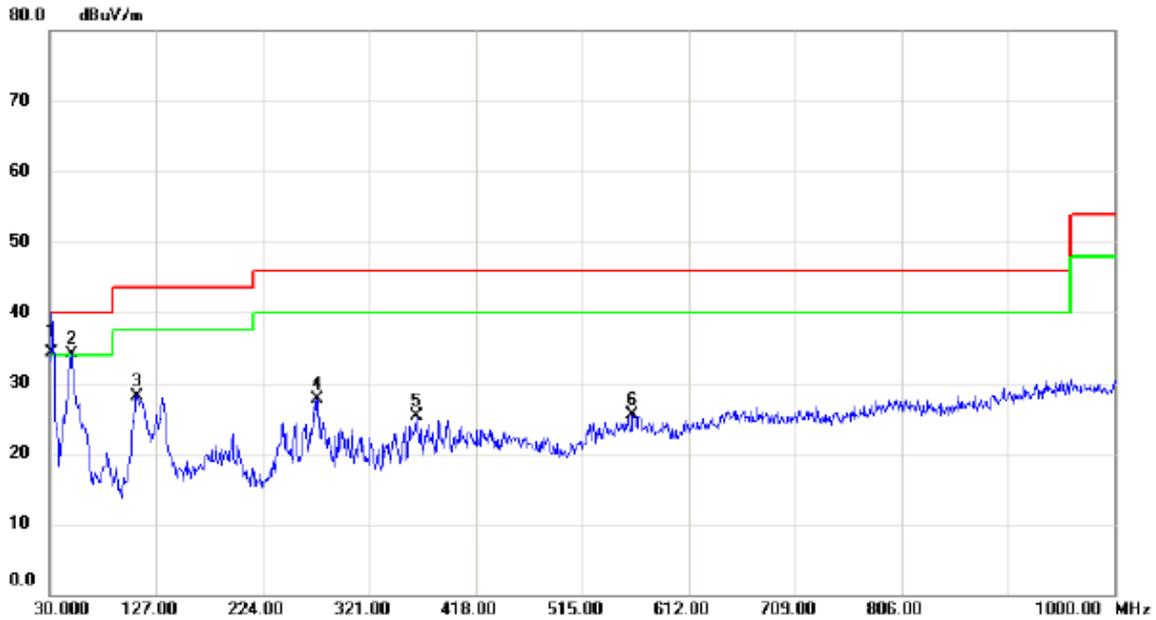

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	48.21	-13.89	34.32	40.00	-5.68	QP	
2	!	49.4000	46.59	-12.43	34.16	40.00	-5.84	peak	
3		109.5400	42.04	-13.84	28.20	43.50	-15.30	peak	
4		273.4700	39.30	-11.54	27.76	46.00	-18.24	peak	
5		363.6800	34.59	-9.19	25.40	46.00	-20.60	peak	
6		561.5600	30.19	-4.63	25.56	46.00	-20.44	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		132.8200	36.74	-11.53	25.21	43.50	-18.29	peak	
2		196.8400	37.10	-13.39	23.71	43.50	-19.79	peak	
3		273.4700	41.77	-11.54	30.23	46.00	-15.77	peak	
4		385.0200	38.61	-8.06	30.55	46.00	-15.45	peak	
5	*	415.0900	38.48	-6.85	31.63	46.00	-14.37	peak	
6		553.8000	29.51	-4.63	24.88	46.00	-21.12	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz


Vertical

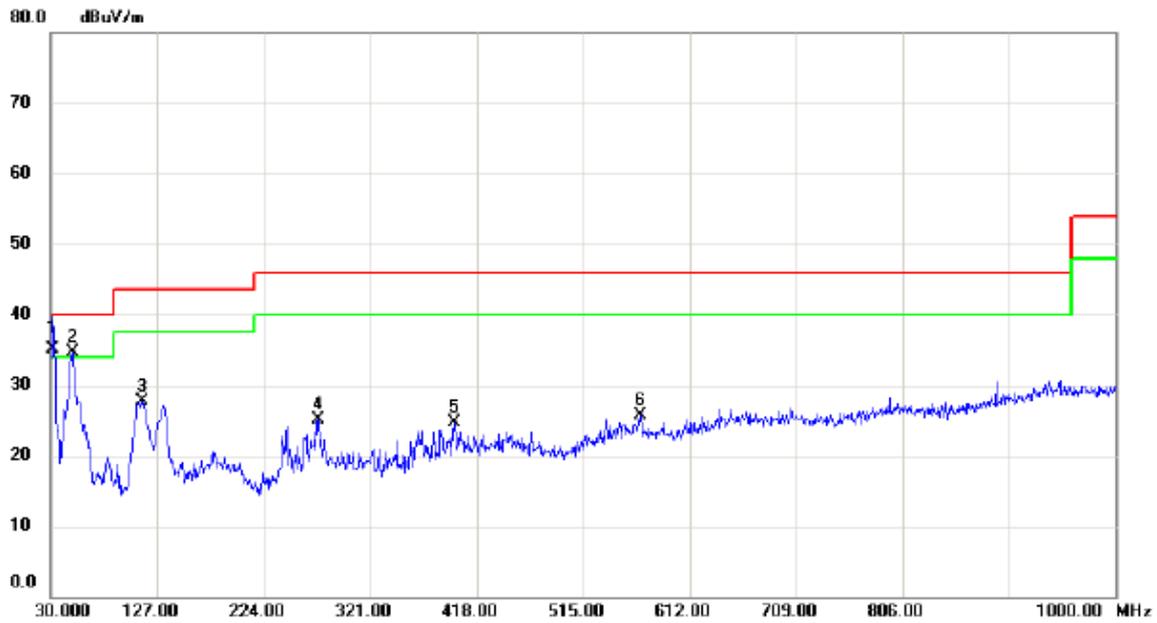

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.02	-13.89	35.13	40.00	-4.87	QP	
2	!	49.4000	47.19	-12.43	34.76	40.00	-5.24	peak	
3		113.4200	41.15	-13.38	27.77	43.50	-15.73	peak	
4		273.4700	36.67	-11.54	25.13	46.00	-20.87	peak	
5		397.6300	32.12	-7.39	24.73	46.00	-21.27	peak	
6		567.3800	30.25	-4.63	25.62	46.00	-20.38	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz


### Horizontal

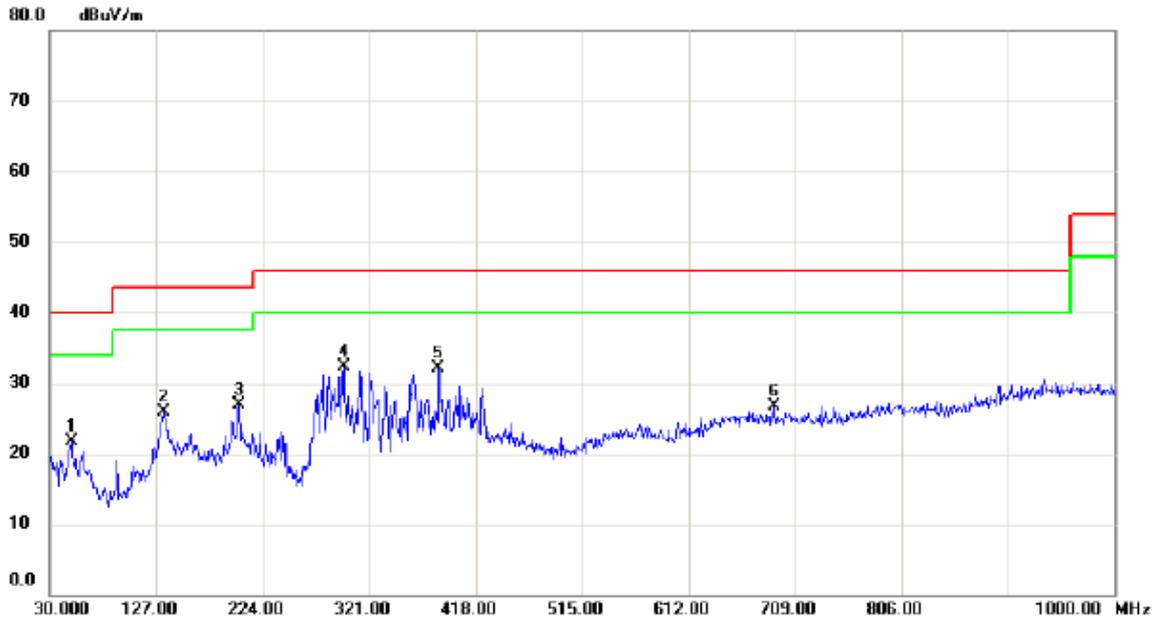

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		49.4000	34.20	-12.43	21.77	40.00	-18.23	peak	
2		133.7900	37.34	-11.53	25.81	43.50	-17.69	peak	
3		202.6600	40.58	-13.61	26.97	43.50	-16.53	peak	
4	*	297.7200	42.03	-9.64	32.39	46.00	-13.61	peak	
5		384.0500	40.30	-8.12	32.18	46.00	-13.82	peak	
6		689.6000	28.22	-1.50	26.72	46.00	-19.28	peak	

Test Mode: UNII-3/TX A Mode 5745MHz


Vertical

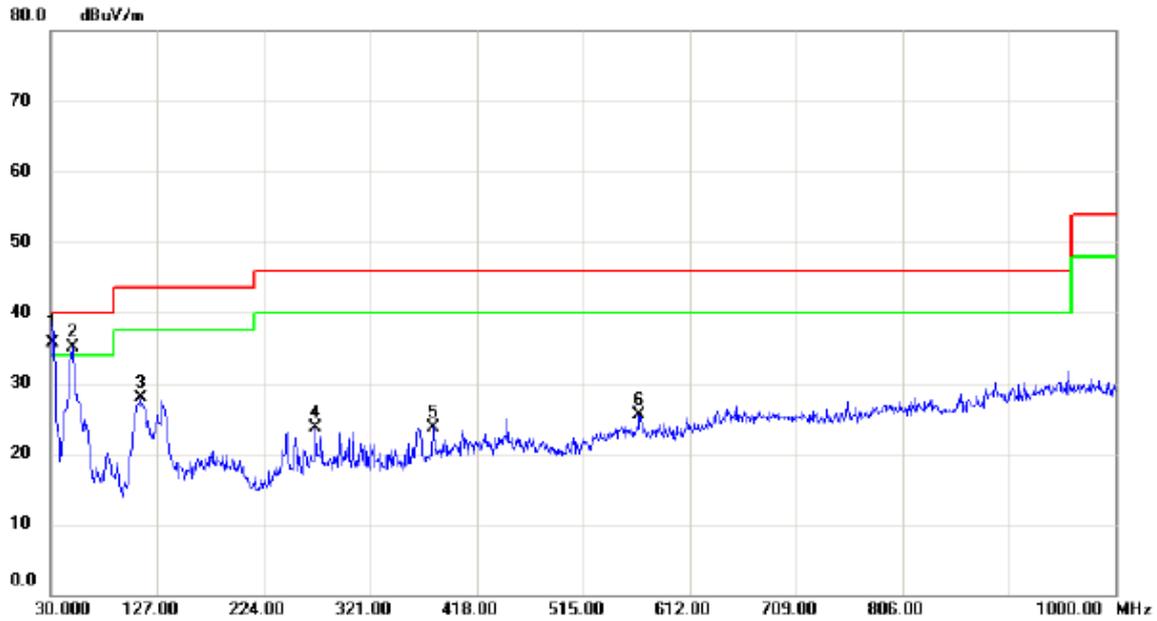

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.56	-13.89	35.67	40.00	-4.33	QP	
2	!	49.4000	47.45	-12.43	35.02	40.00	-4.98	peak	
3		111.4800	41.49	-13.61	27.88	43.50	-15.62	peak	
4		271.5300	35.36	-11.68	23.68	46.00	-22.32	peak	
5		378.2300	32.22	-8.42	23.80	46.00	-22.20	peak	
6		566.4100	30.15	-4.63	25.52	46.00	-20.48	peak	

Test Mode: UNII-3/TX A Mode 5745MHz


Horizontal

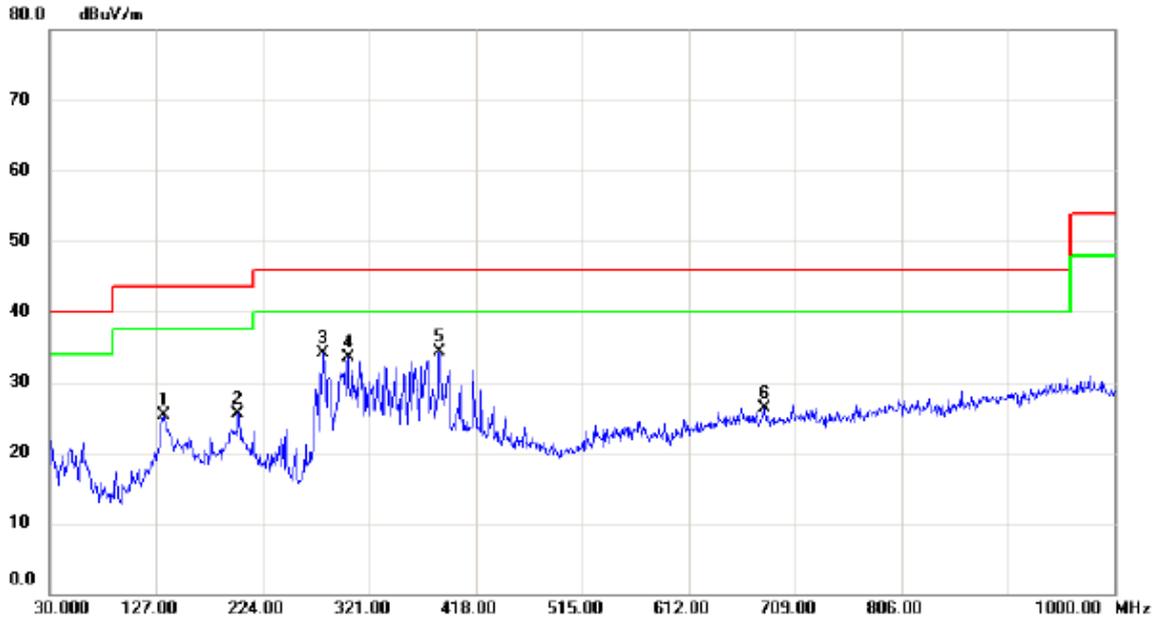

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		133.7900	36.89	-11.53	25.36	43.50	-18.14	peak	
2		201.6900	39.18	-13.59	25.59	43.50	-17.91	peak	
3		278.3200	45.34	-11.19	34.15	46.00	-11.85	peak	
4		301.6000	43.11	-9.59	33.52	46.00	-12.48	peak	
5	*	385.0200	42.35	-8.06	34.29	46.00	-11.71	peak	
6		680.8700	27.88	-1.54	26.34	46.00	-19.66	peak	

Test Mode: UNII-3/TX A Mode 5825MHz


Vertical

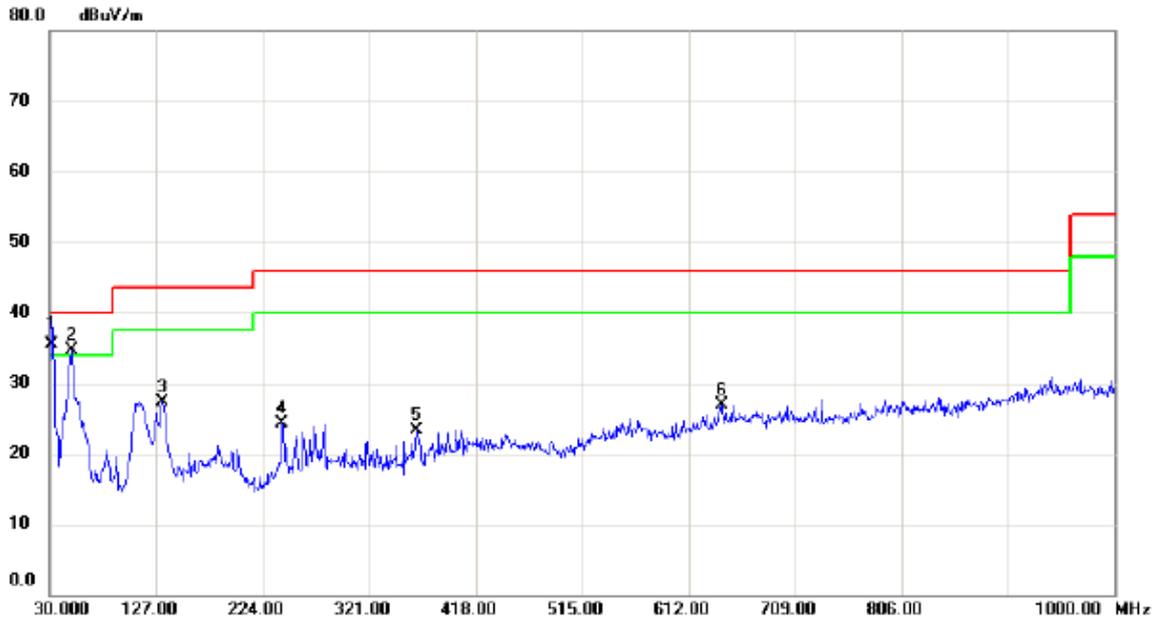

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.32	-13.89	35.43	40.00	-4.57	QP	
2	!	50.3700	47.24	-12.48	34.76	40.00	-5.24	peak	
3		132.8200	38.86	-11.53	27.33	43.50	-16.17	peak	
4		241.4600	36.83	-12.44	24.39	46.00	-21.61	peak	
5		363.6800	32.47	-9.19	23.28	46.00	-22.72	peak	
6		642.0700	29.06	-2.12	26.94	46.00	-19.06	peak	

Test Mode: UNII-3/TX A Mode 5825MHz

### Horizontal

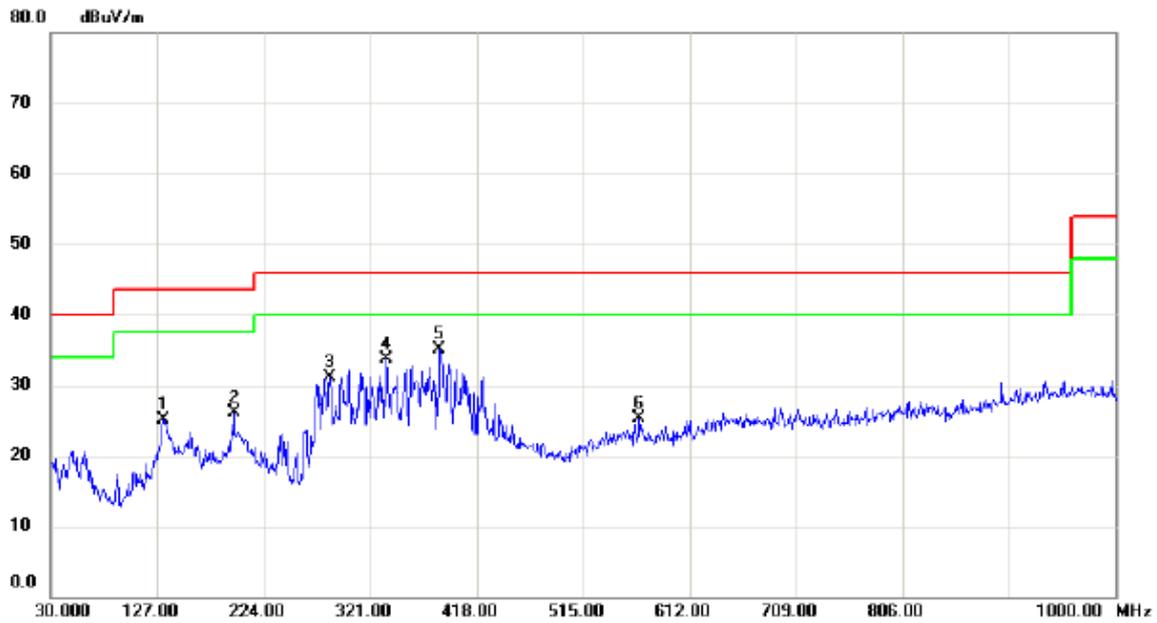


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		132.8200	36.72	-11.53	25.19	43.50	-18.31	peak	
2		196.8400	39.54	-13.39	26.15	43.50	-17.35	peak	
3		284.1400	41.59	-10.54	31.05	46.00	-14.95	peak	
4		335.5500	43.55	-9.82	33.73	46.00	-12.27	peak	
5	*	384.0500	43.22	-8.12	35.10	46.00	-10.90	peak	
6		566.4100	29.89	-4.63	25.26	46.00	-20.74	peak	

### For ANT 1+ANT 2

Test Mode: UNII-1/ TX N20 Mode 5180MHz

#### Vertical

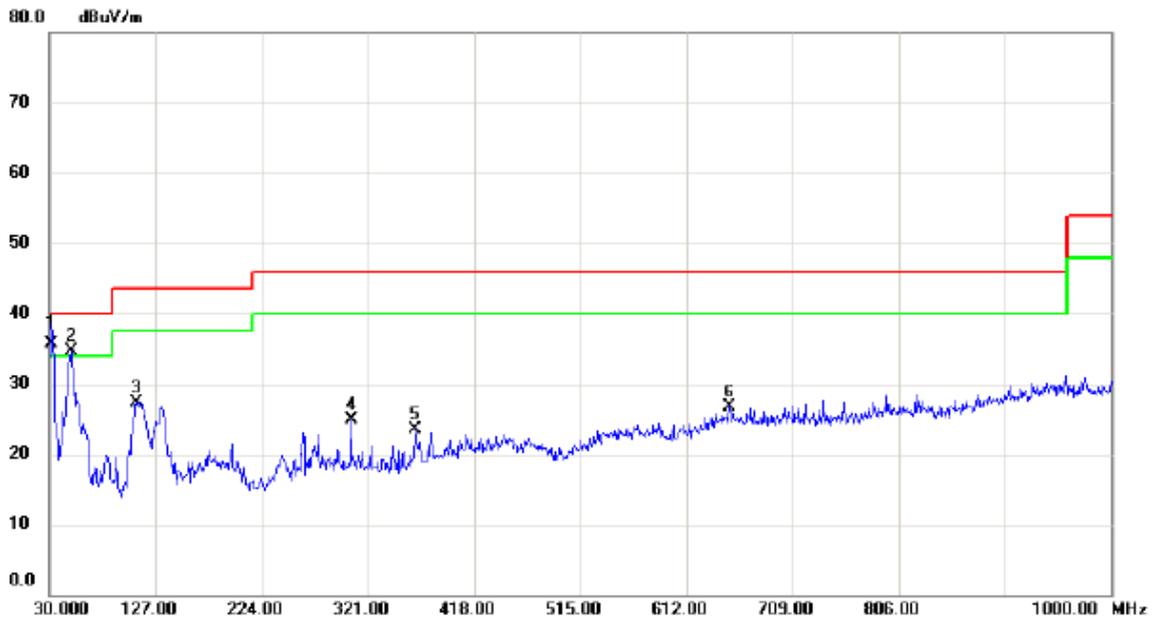

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.51	-13.89	35.62	40.00	-4.38	QP	
2	!	49.4000	47.21	-12.43	34.78	40.00	-5.22	peak	
3		109.5400	41.20	-13.84	27.36	43.50	-16.14	peak	
4		305.4800	34.50	-9.63	24.87	46.00	-21.13	peak	
5		364.6500	32.64	-9.15	23.49	46.00	-22.51	peak	
6		651.7700	28.43	-1.63	26.80	46.00	-19.20	peak	

Test Mode: UNII-1/ TX N20 Mode 5180MHz


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		133.7900	37.34	-11.53	25.81	43.50	-17.69	peak	
2		196.8400	38.83	-13.39	25.44	43.50	-18.06	peak	
3		278.3200	44.06	-11.19	32.87	46.00	-13.13	peak	
4		305.4800	43.00	-9.63	33.37	46.00	-12.63	peak	
5	*	384.0500	42.26	-8.12	34.14	46.00	-11.86	peak	
6		648.8600	28.65	-1.72	26.93	46.00	-19.07	peak	

Test Mode: UNII-1/ TX N20 Mode 5240MHz

Vertical

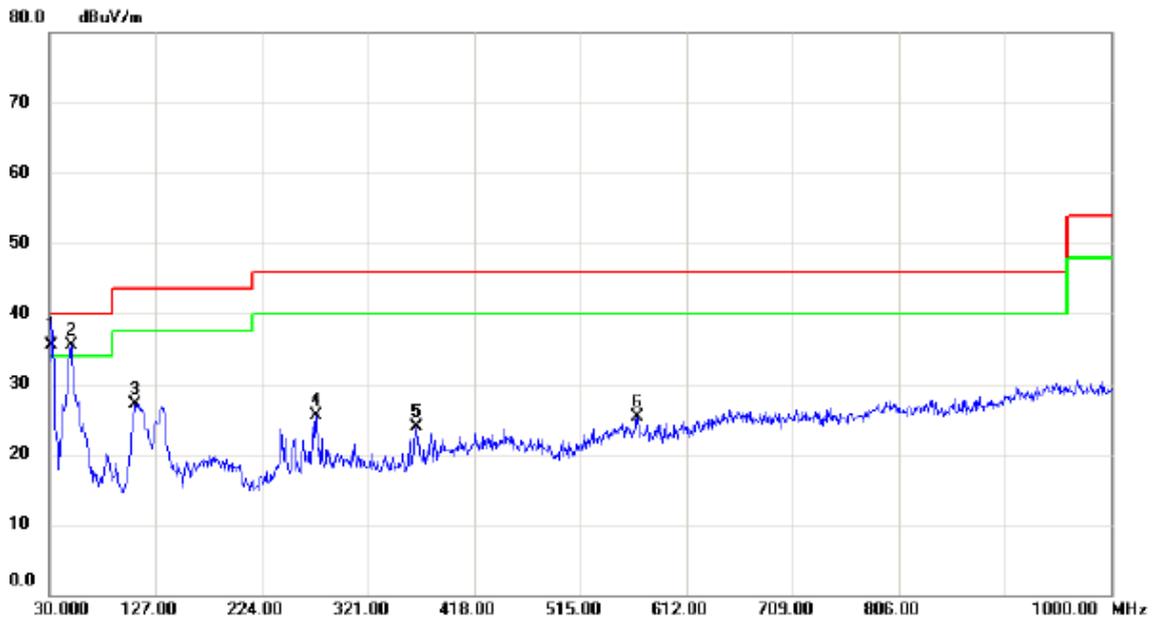

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.40	-13.89	35.51	40.00	-4.49	QP	
2	!	49.4000	47.94	-12.43	35.51	40.00	-4.49	peak	
3		108.5700	41.01	-13.92	27.09	43.50	-16.41	peak	
4		273.4700	36.99	-11.54	25.45	46.00	-20.55	peak	
5		365.6200	33.03	-9.09	23.94	46.00	-22.06	peak	
6		567.3800	29.88	-4.63	25.25	46.00	-20.75	peak	

Test Mode: UNII-1/TX N20 Mode 5240MHz


### Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		133.7900	37.17	-11.53	25.64	43.50	-17.86	peak	
2		201.6900	37.27	-13.59	23.68	43.50	-19.82	peak	
3	*	293.8400	43.64	-9.72	33.92	46.00	-12.08	peak	
4		358.8300	41.56	-9.45	32.11	46.00	-13.89	peak	
5		438.3700	34.39	-6.21	28.18	46.00	-17.82	peak	
6		644.9800	28.96	-1.94	27.02	46.00	-18.98	peak	

Test Mode: UNII-2A/ TX N20 Mode 5260MHz


Vertical

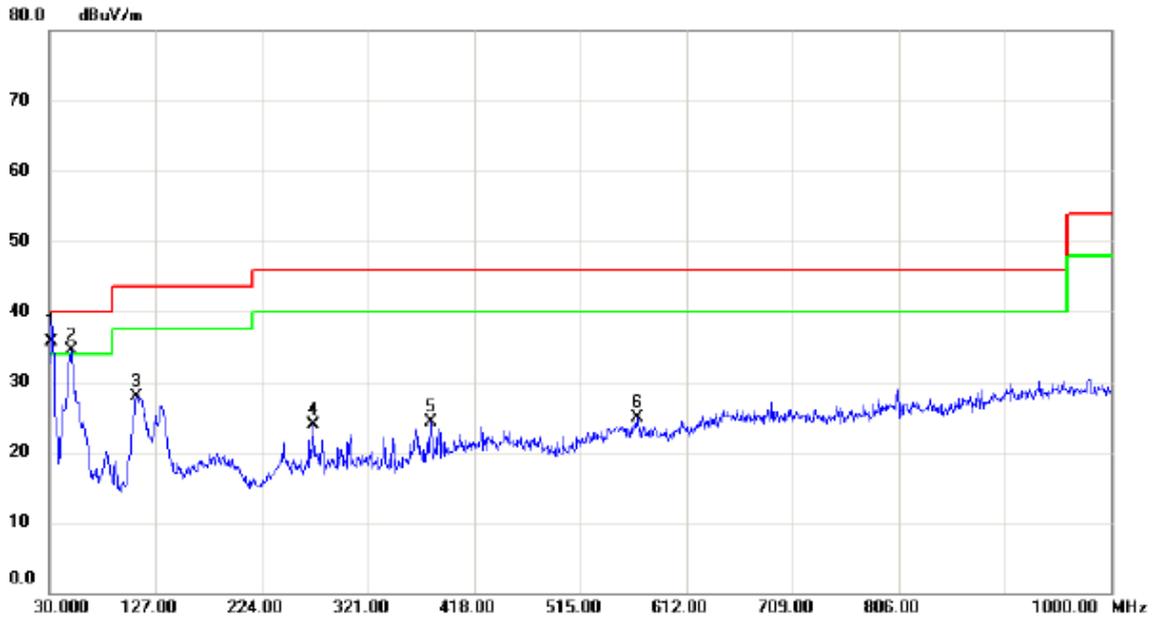

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.54	-13.89	35.65	40.00	-4.35	QP	
2	!	49.4000	47.03	-12.43	34.60	40.00	-5.40	peak	
3		109.5400	41.68	-13.84	27.84	43.50	-15.66	peak	
4		270.5600	35.62	-11.75	23.87	46.00	-22.13	peak	
5		378.2300	32.79	-8.42	24.37	46.00	-21.63	peak	
6		567.3800	29.55	-4.63	24.92	46.00	-21.08	peak	

Test Mode: UNII-2A/ TX N20 Mode 5260MHz


### Horizontal

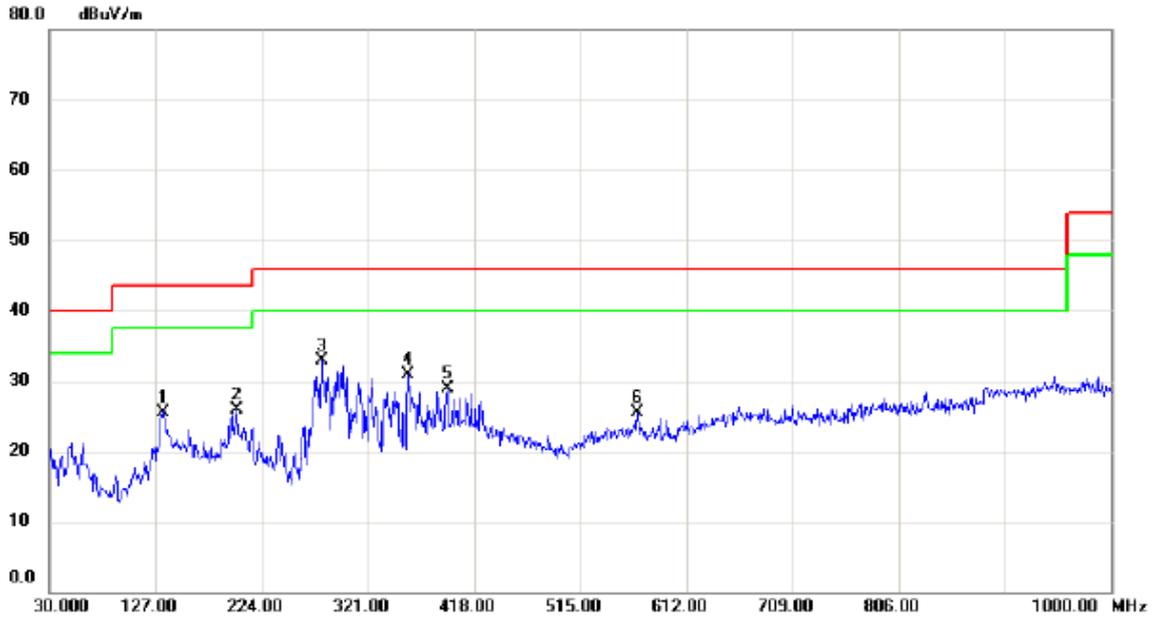

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		133.7900	37.13	-11.53	25.60	43.50	-17.90	peak	
2		200.7200	39.39	-13.58	25.81	43.50	-17.69	peak	
3	*	278.3200	44.04	-11.19	32.85	46.00	-13.15	peak	
4		357.8600	40.41	-9.51	30.90	46.00	-15.10	peak	
5		393.7500	36.51	-7.60	28.91	46.00	-17.09	peak	
6		567.3800	30.20	-4.63	25.57	46.00	-20.43	peak	

Test Mode: UNII-2A/ TX N20 Mode 5320MHz


Vertical

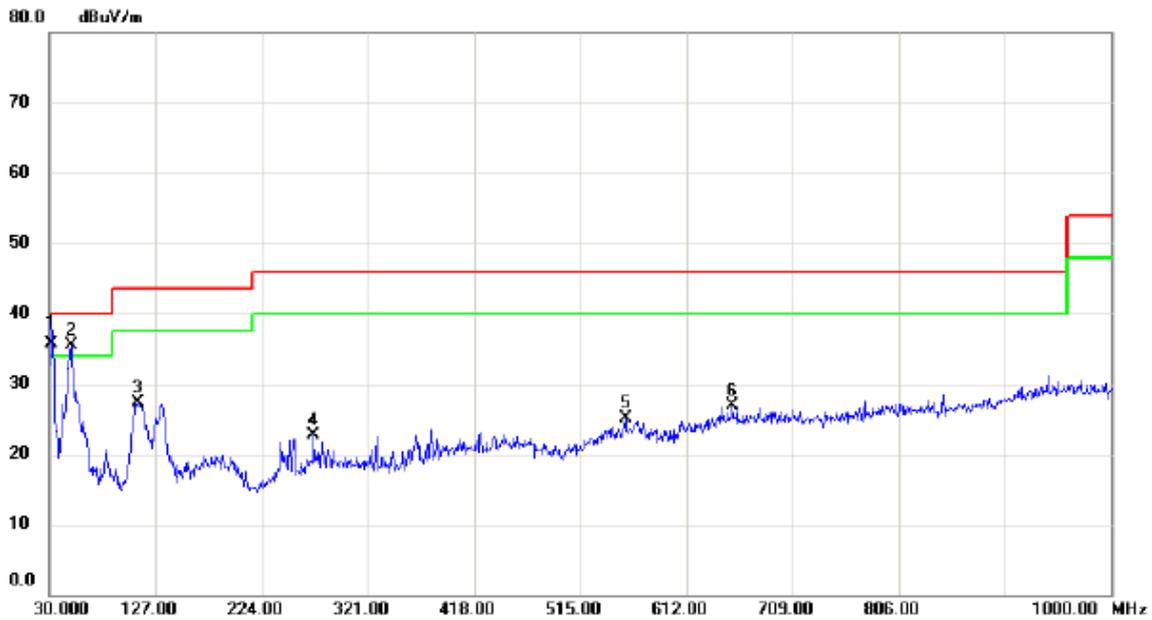

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.50	-13.89	35.61	40.00	-4.39	QP	
2	!	49.4000	47.99	-12.43	35.56	40.00	-4.44	peak	
3		110.5100	41.08	-13.74	27.34	43.50	-16.16	peak	
4		271.5300	34.31	-11.68	22.63	46.00	-23.37	peak	
5		556.7100	29.73	-4.62	25.11	46.00	-20.89	peak	
6		653.7100	28.55	-1.63	26.92	46.00	-19.08	peak	

Test Mode: UNII-2A/ TX N20 Mode 5320MHz


### Horizontal

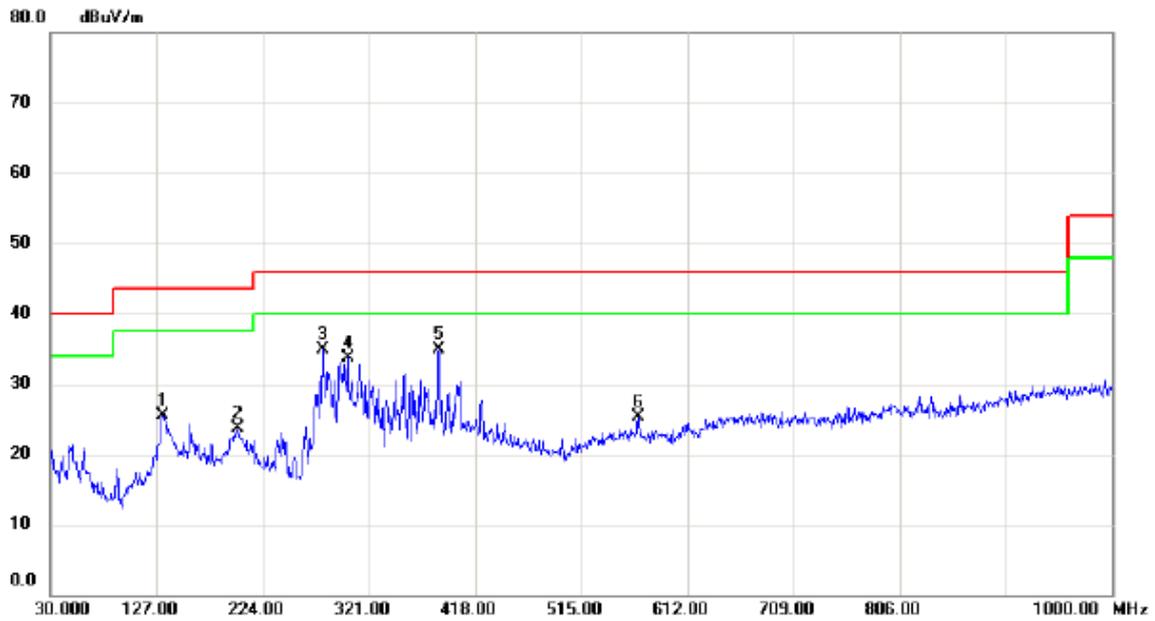

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		132.8200	37.09	-11.53	25.56	43.50	-17.94	peak	
2		200.7200	37.25	-13.58	23.67	43.50	-19.83	peak	
3		278.3200	46.06	-11.19	34.87	46.00	-11.13	peak	
4		301.6000	43.38	-9.59	33.79	46.00	-12.21	peak	
5	*	385.0200	43.06	-8.06	35.00	46.00	-11.00	peak	
6		567.3800	30.03	-4.63	25.40	46.00	-20.60	peak	

Test Mode: UNII-2C/ TX N20 Mode 5500MHz


Vertical

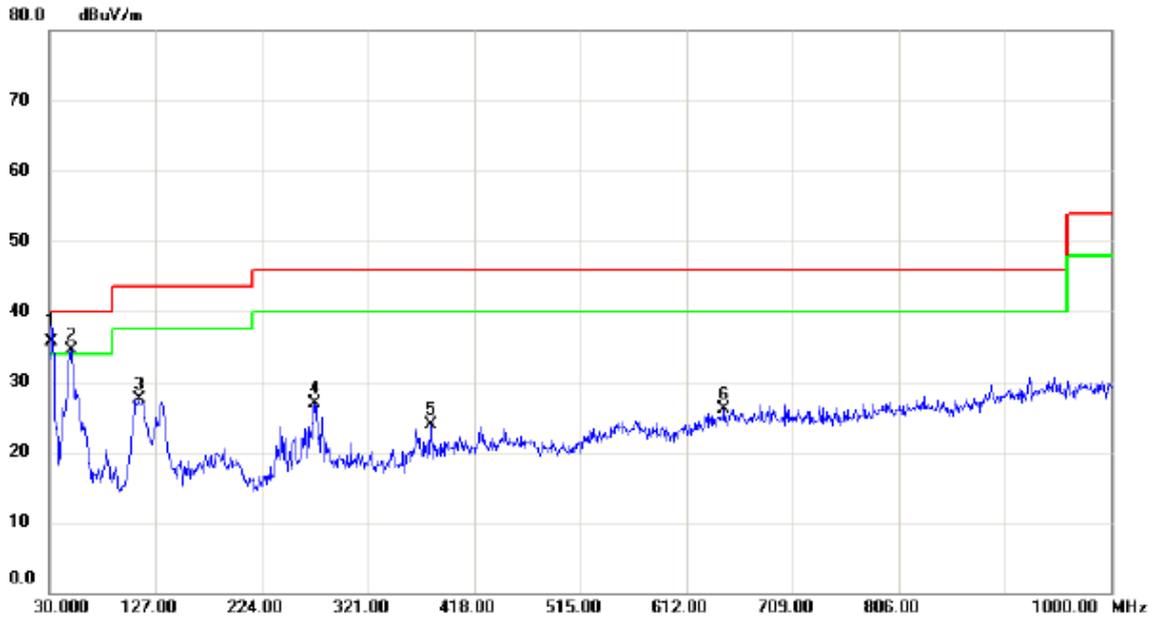

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.63	-13.89	35.74	40.00	-4.26	QP	
2	!	49.4000	46.93	-12.43	34.50	40.00	-5.50	peak	
3		111.4800	41.09	-13.61	27.48	43.50	-16.02	peak	
4		272.5000	38.44	-11.60	26.84	46.00	-19.16	peak	
5		378.2300	32.28	-8.42	23.86	46.00	-22.14	peak	
6		646.9200	27.97	-1.82	26.15	46.00	-19.85	peak	

Test Mode: UNII-2C/ TX N20 Mode 5500MHz


Horizontal

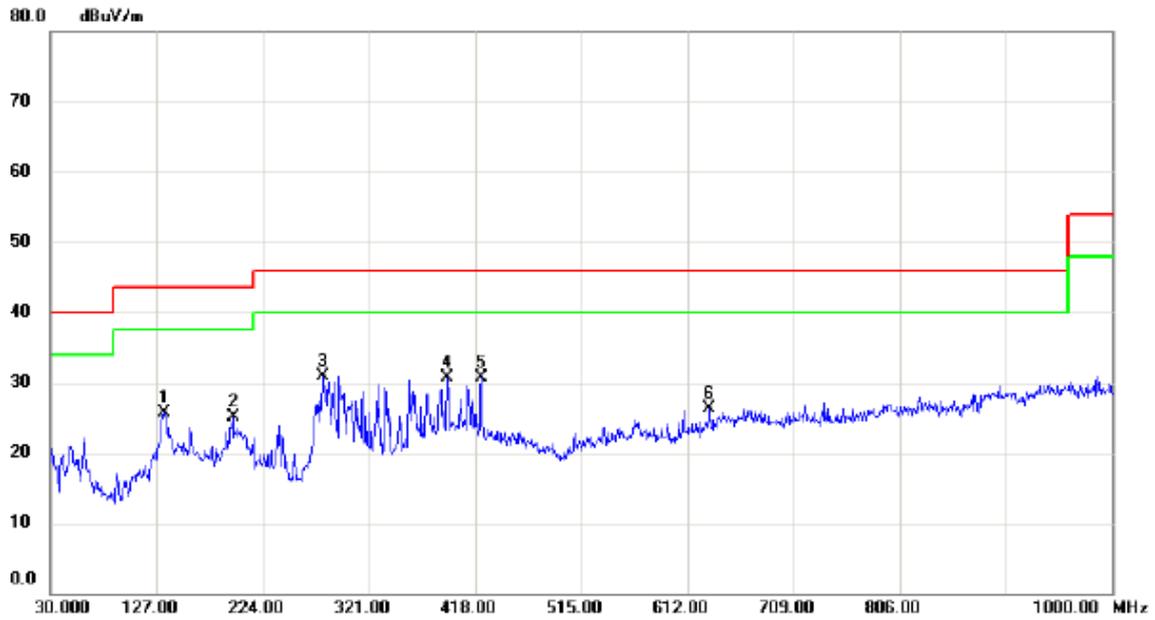

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		133.7900	37.22	-11.53	25.69	43.50	-17.81	peak	
2		196.8400	38.47	-13.39	25.08	43.50	-18.42	peak	
3	*	278.3200	42.09	-11.19	30.90	46.00	-15.10	peak	
4		392.7800	38.30	-7.65	30.65	46.00	-15.35	peak	
5		423.8200	37.42	-6.62	30.80	46.00	-15.20	peak	
6		632.3700	29.08	-2.69	26.39	46.00	-19.61	peak	

Test Mode: UNII-2C/ TX N20 Mode 5700MHz


Vertical

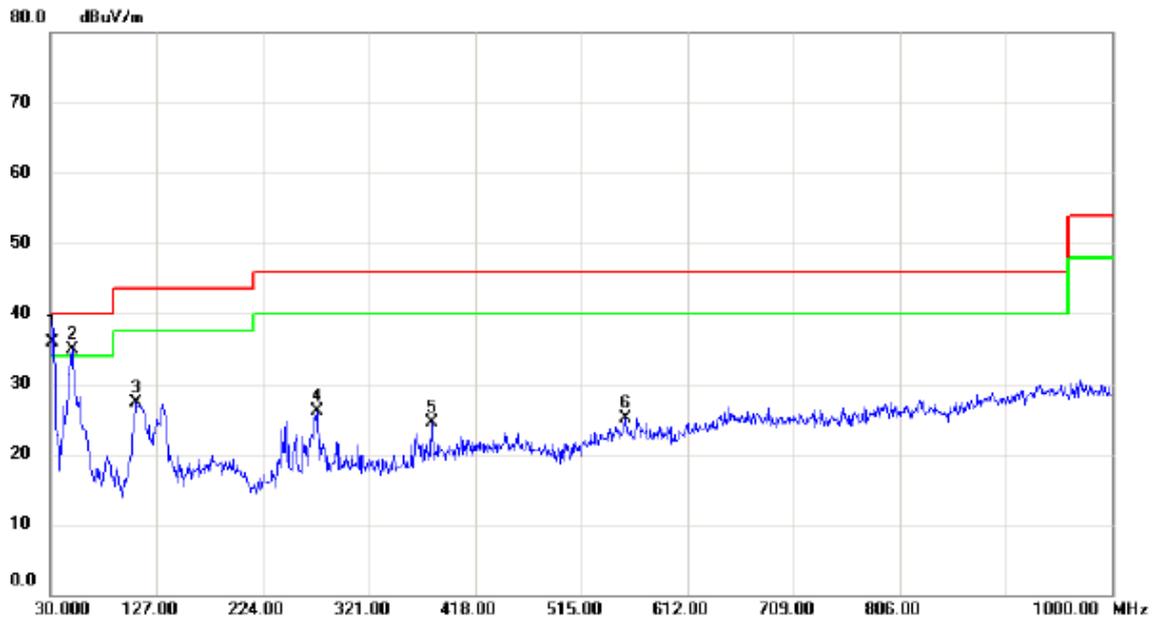

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.75	-13.89	35.86	40.00	-4.14	QP	
2	!	49.4000	47.29	-12.43	34.86	40.00	-5.14	peak	
3		108.5700	41.28	-13.92	27.36	43.50	-16.14	peak	
4		273.4700	37.65	-11.54	26.11	46.00	-19.89	peak	
5		378.2300	32.83	-8.42	24.41	46.00	-21.59	peak	
6		555.7400	29.81	-4.61	25.20	46.00	-20.80	peak	

Test Mode: UNII-2C/ TX N20 Mode 5700MHz


Horizontal

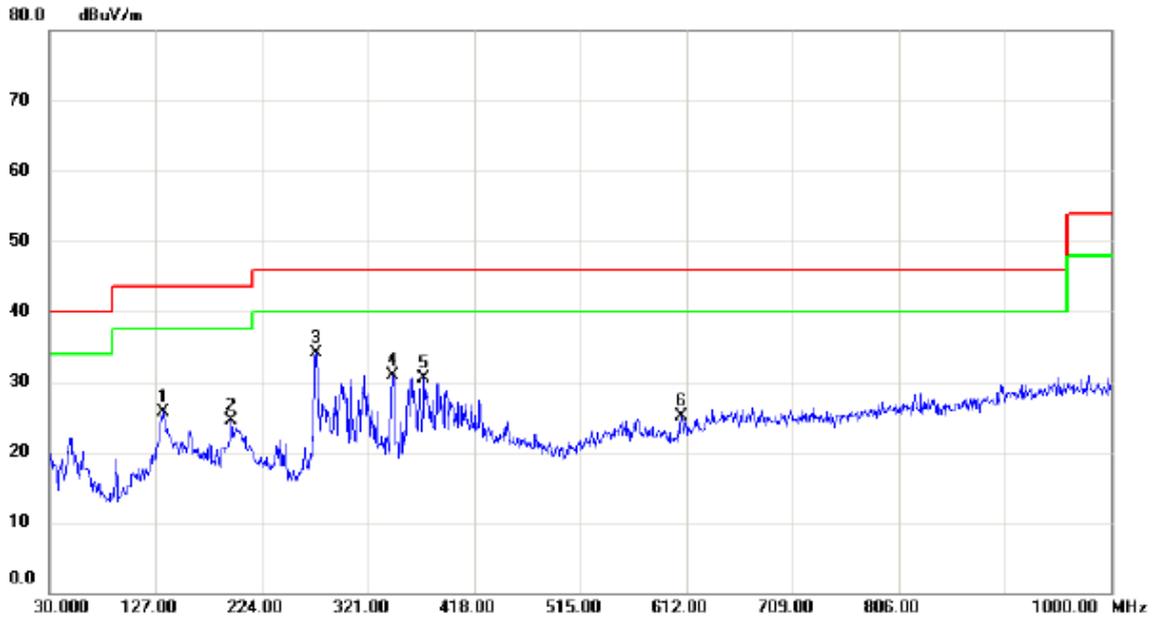

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		133.7900	37.16	-11.53	25.63	43.50	-17.87	peak	
2		195.8700	37.89	-13.33	24.56	43.50	-18.94	peak	
3	*	273.4700	45.68	-11.54	34.14	46.00	-11.86	peak	
4		343.3100	40.81	-9.88	30.93	46.00	-15.07	peak	
5		372.4100	39.26	-8.72	30.54	46.00	-15.46	peak	
6		607.1500	29.39	-4.22	25.17	46.00	-20.83	peak	

Test Mode: UNII-3/ TX N20 Mode 5745MHz


Vertical

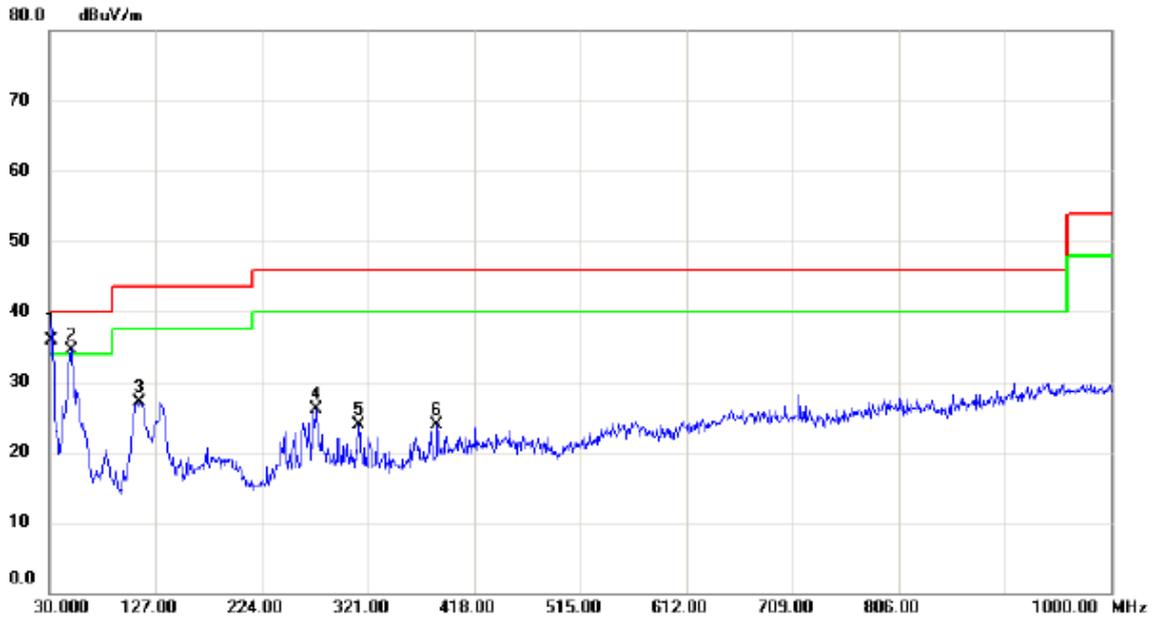

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.75	-13.89	35.86	40.00	-4.14	QP	
2	!	49.4000	47.03	-12.43	34.60	40.00	-5.40	peak	
3		111.4800	40.73	-13.61	27.12	43.50	-16.38	peak	
4		273.4700	37.56	-11.54	26.02	46.00	-19.98	peak	
5		312.2700	33.51	-9.67	23.84	46.00	-22.16	peak	
6		384.0500	31.93	-8.12	23.81	46.00	-22.19	peak	

Test Mode: UNII-3/ TX N20 Mode 5745MHz


### Horizontal

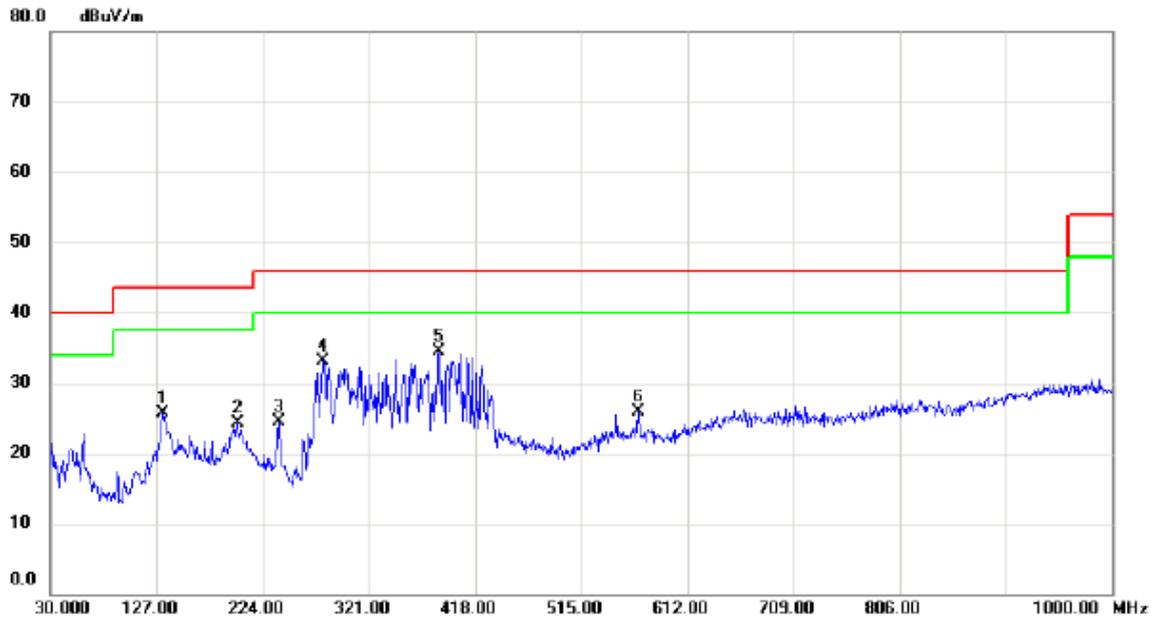

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		132.8200	37.29	-11.53	25.76	43.50	-17.74	peak	
2		200.7200	37.93	-13.58	24.35	43.50	-19.15	peak	
3		238.5500	36.94	-12.45	24.49	46.00	-21.51	peak	
4		278.3200	44.21	-11.19	33.02	46.00	-12.98	peak	
5	*	385.0200	42.52	-8.06	34.46	46.00	-11.54	peak	
6		567.3800	30.44	-4.63	25.81	46.00	-20.19	peak	

Test Mode: UNII-3/ TX N20 Mode 5825MHz


Vertical

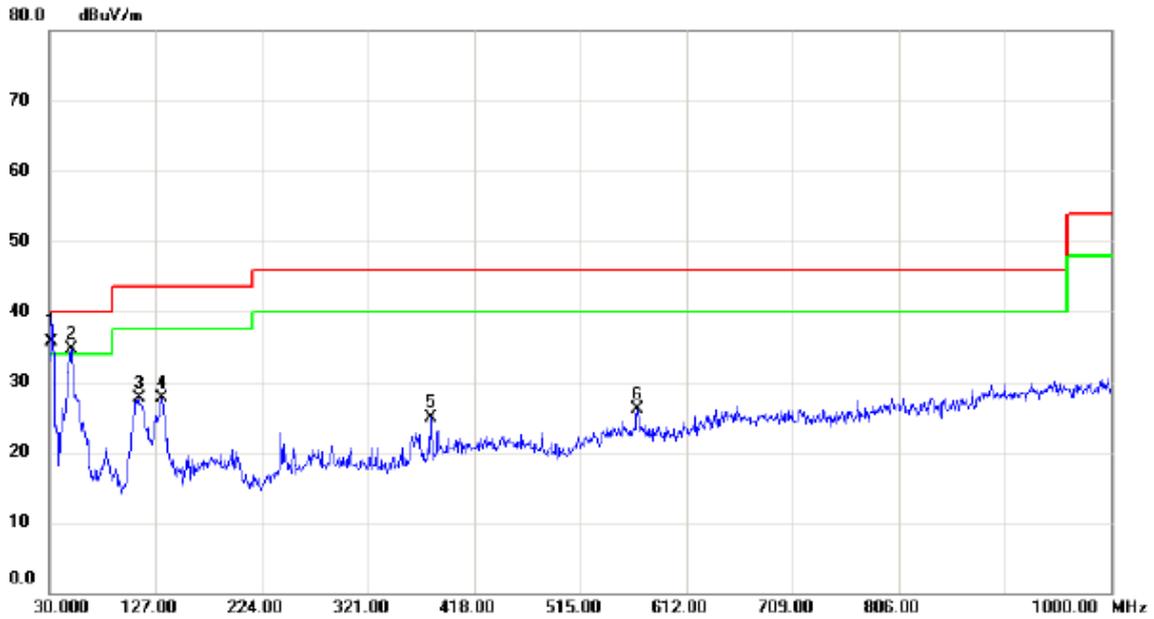

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	49.65	-13.89	35.76	40.00	-4.24	QP	
2	!	49.4000	47.19	-12.43	34.76	40.00	-5.24	peak	
3		111.4800	41.34	-13.61	27.73	43.50	-15.77	peak	
4		132.8200	39.20	-11.53	27.67	43.50	-15.83	peak	
5		378.2300	33.36	-8.42	24.94	46.00	-21.06	peak	
6		567.3800	30.68	-4.63	26.05	46.00	-19.95	peak	

Test Mode: UNII-3/ TX N20 Mode 5825MHz

### Horizontal

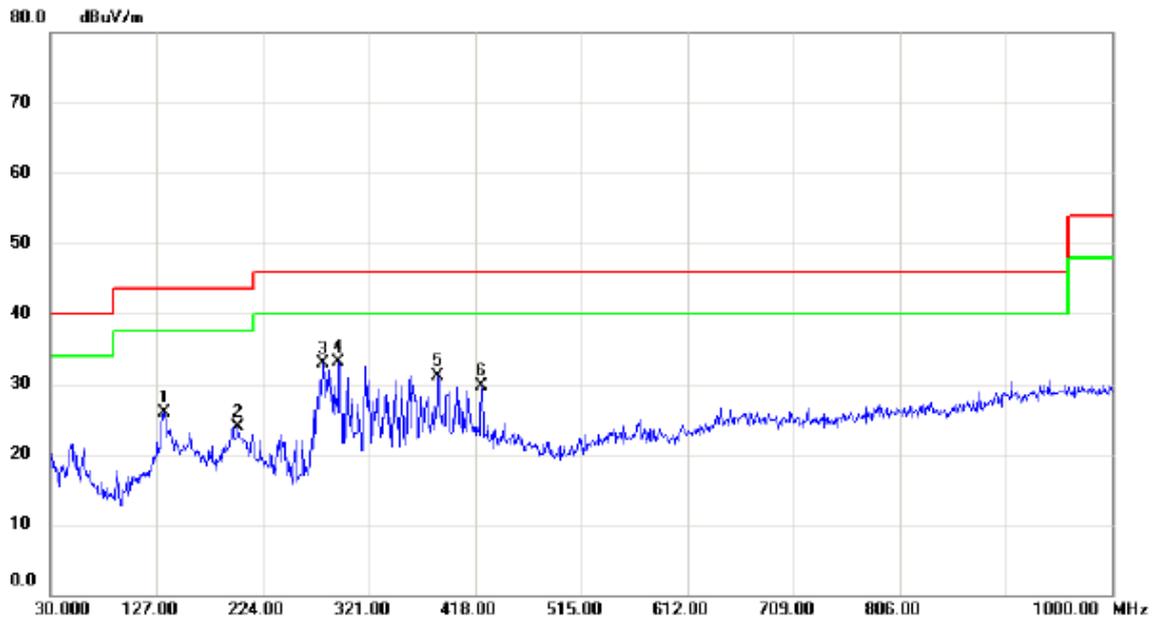


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		133.7900	37.37	-11.53	25.84	43.50	-17.66	peak	
2		201.6900	37.54	-13.59	23.95	43.50	-19.55	peak	
3		278.3200	44.00	-11.19	32.81	46.00	-13.19	peak	
4	*	293.8400	42.80	-9.72	33.08	46.00	-12.92	peak	
5		384.0500	39.24	-8.12	31.12	46.00	-14.88	peak	
6		423.8200	36.31	-6.62	29.69	46.00	-16.31	peak	

## **ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)**

### For ANT 1

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


#### Vertical

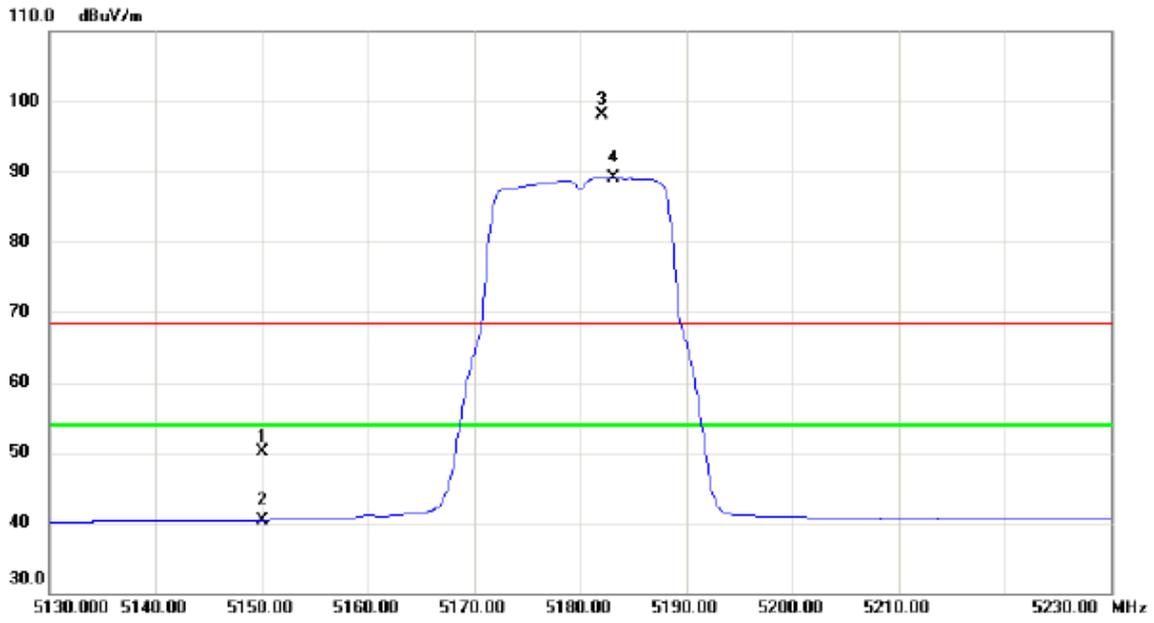


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	9.79	40.22	50.01	68.30	-18.29	peak	
2		5150.000	0.15	40.22	40.37	54.00	-13.63	AVG	
3	X	5182.100	57.83	40.29	98.12	68.30	29.82	peak	No Limit
4	*	5183.200	48.81	40.29	89.10	54.00	35.10	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

### Vertical

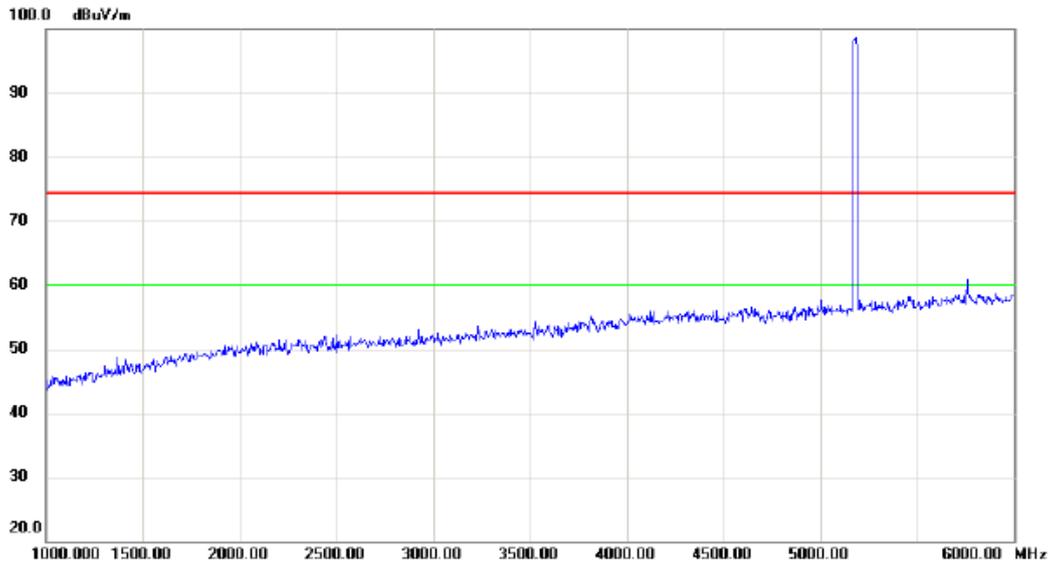


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

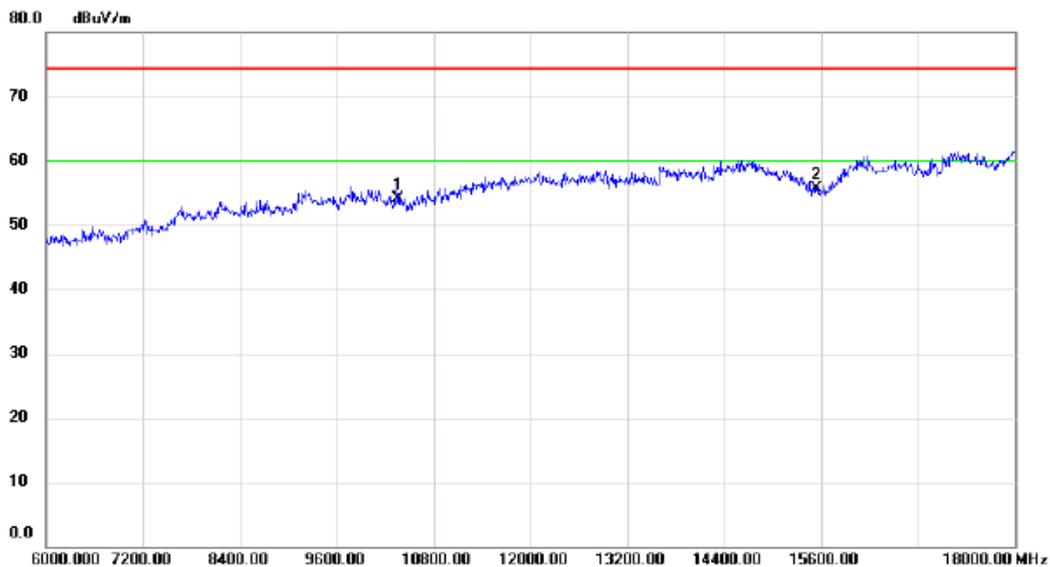


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10360.00	40.17	13.85	54.02	74.30	-20.28	peak	
2	*	15540.00	38.82	16.85	55.67	74.30	-18.63	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

### Vertical

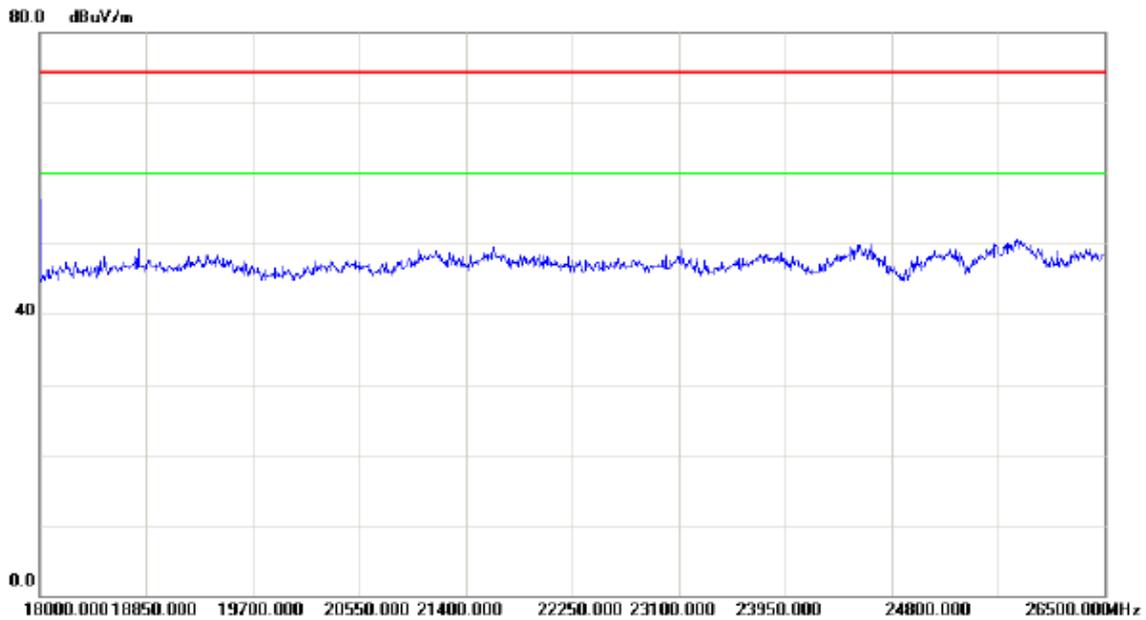


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

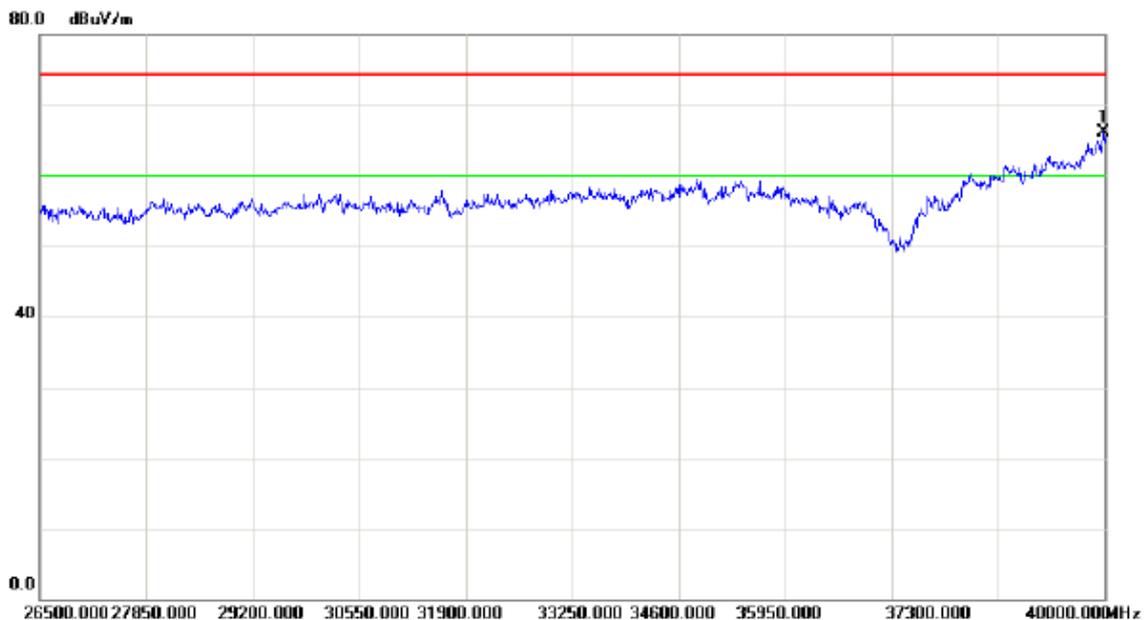

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39986.50	48.64	17.56	66.20	74.30	-8.10	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


### Horizontal

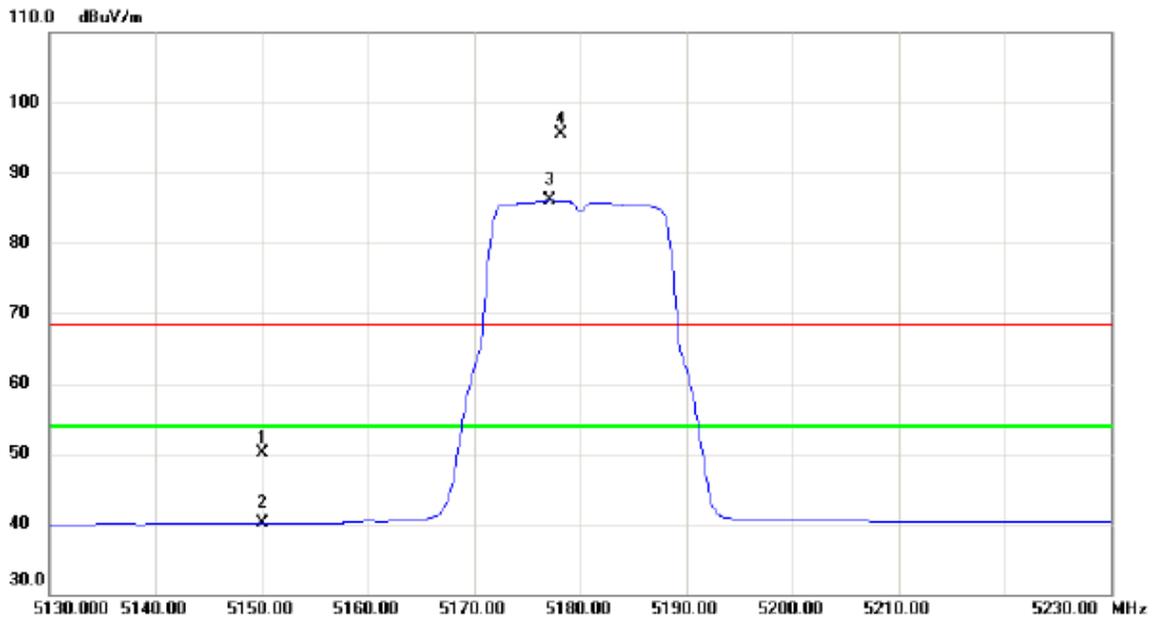


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5150.000	9.93	40.22	50.15	68.30	-18.15	peak	
2		5150.000	-0.14	40.22	40.08	54.00	-13.92	AVG	
3	*	5177.200	45.73	40.28	86.01	54.00	32.01	AVG	No Limit
4	X	5178.200	55.24	40.28	95.52	68.30	27.22	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

### Horizontal

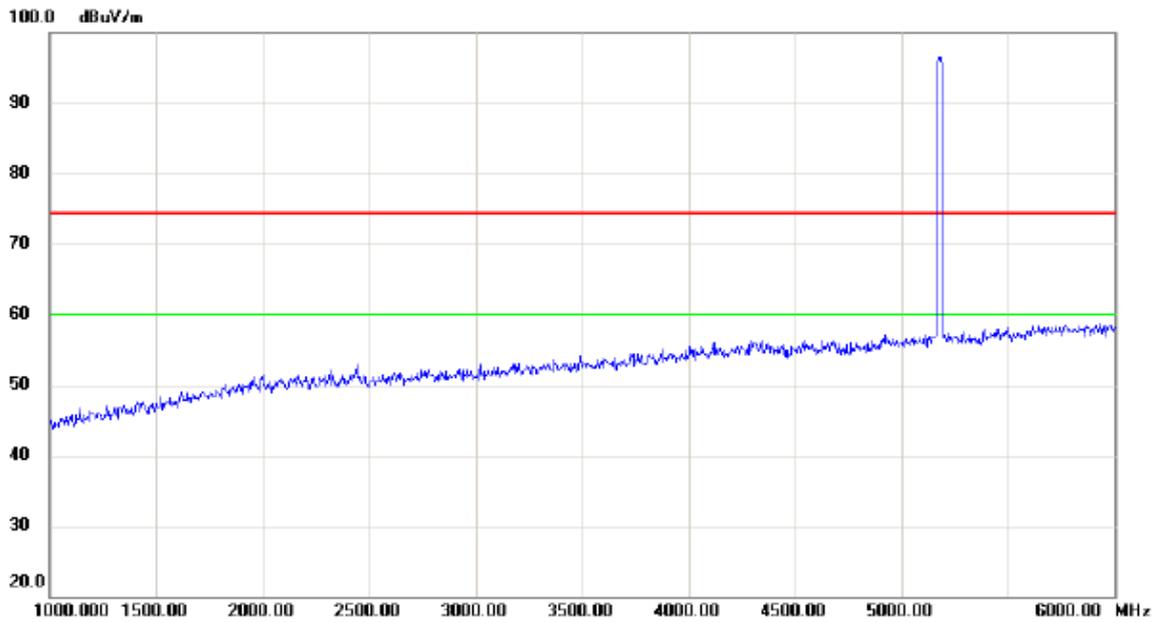


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

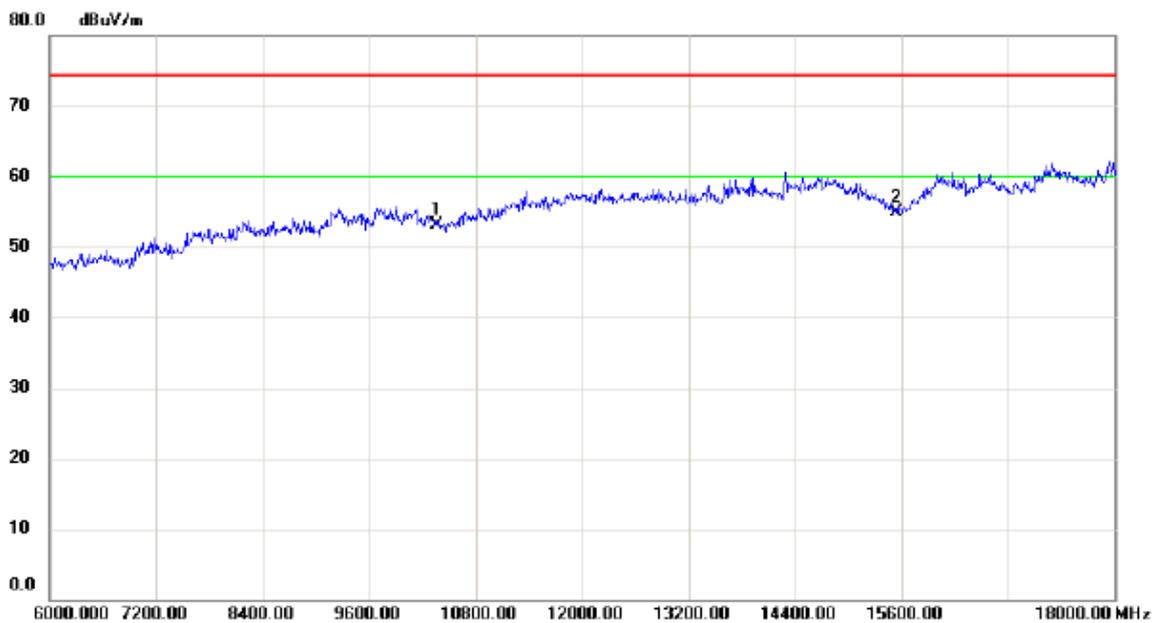


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10360.00	39.23	13.85	53.08	74.30	-21.22	peak	
2	*	15540.00	37.97	16.85	54.82	74.30	-19.48	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

### Horizontal

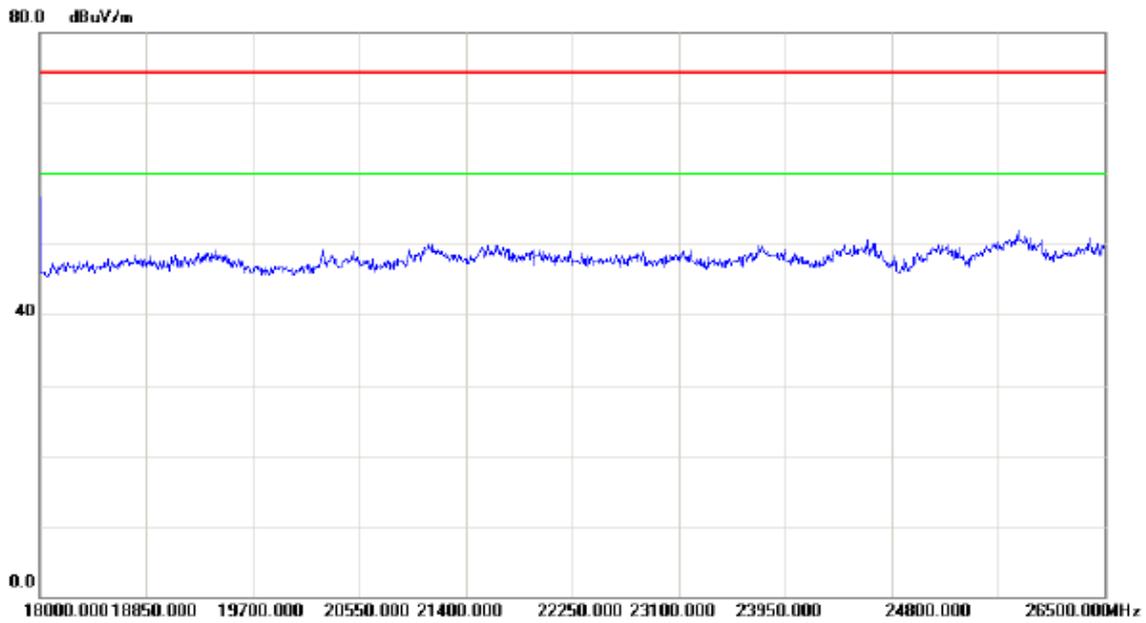


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

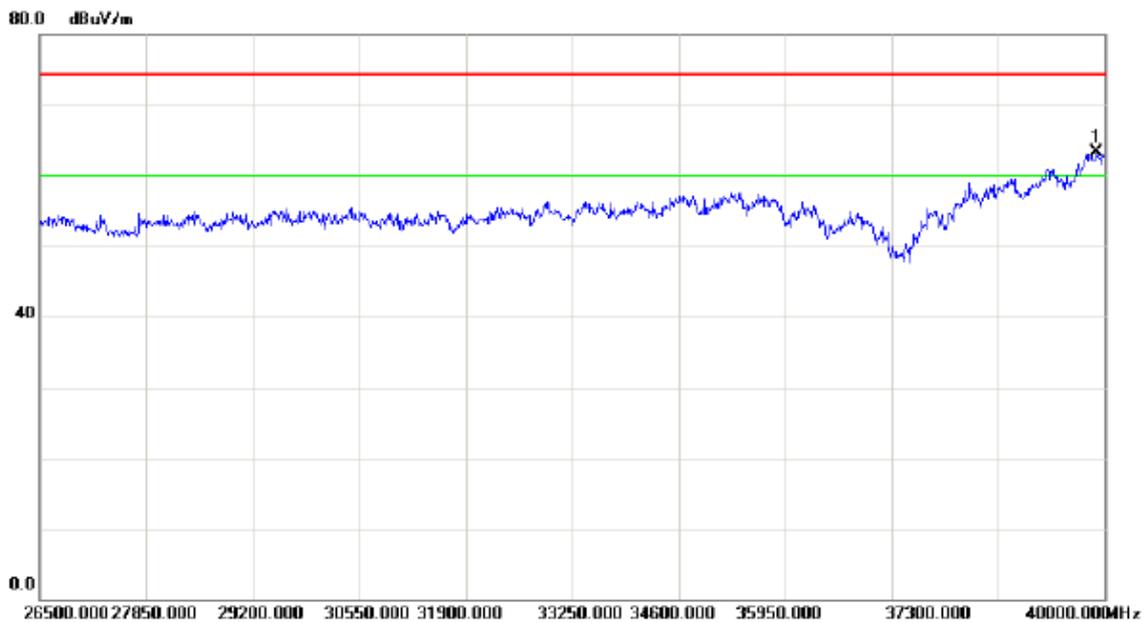

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39905.50	45.99	17.37	63.36	74.30	-10.94	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


### Vertical

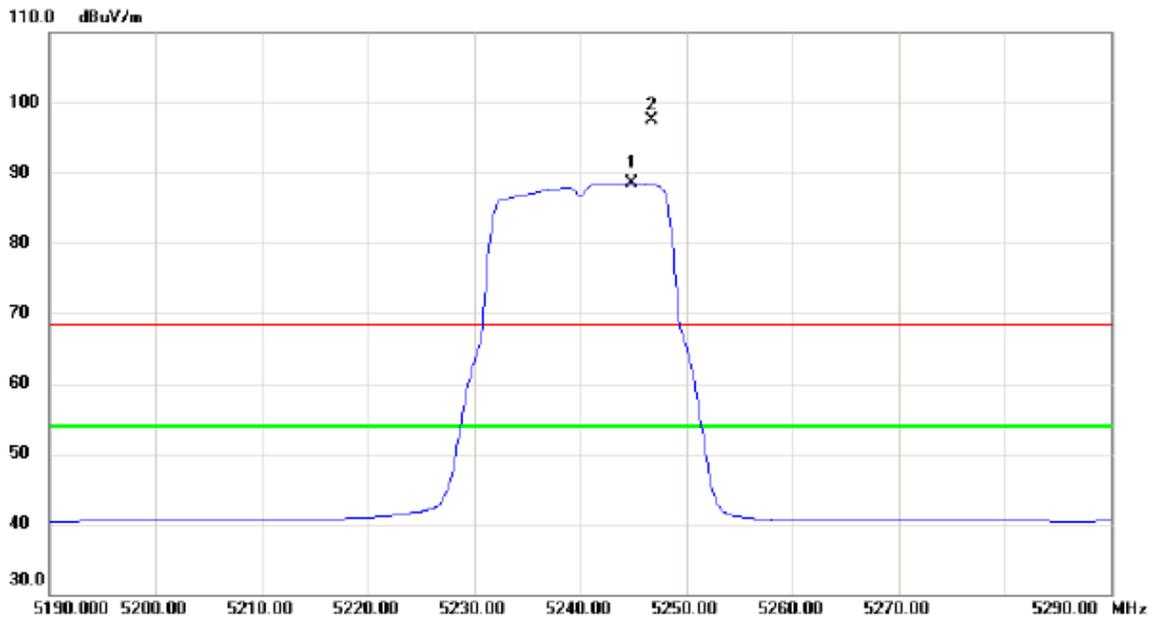


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5244.800	48.01	40.42	88.43	54.00	34.43	AVG	No Limit
2	X	5246.700	57.18	40.42	97.60	68.30	29.30	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

### Vertical

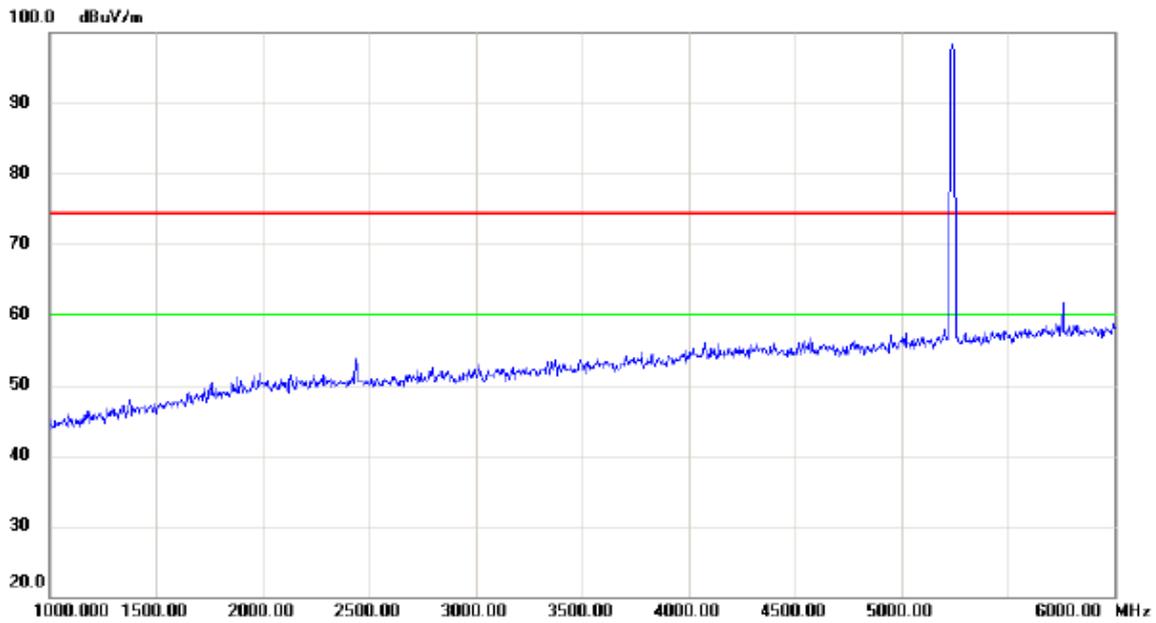


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

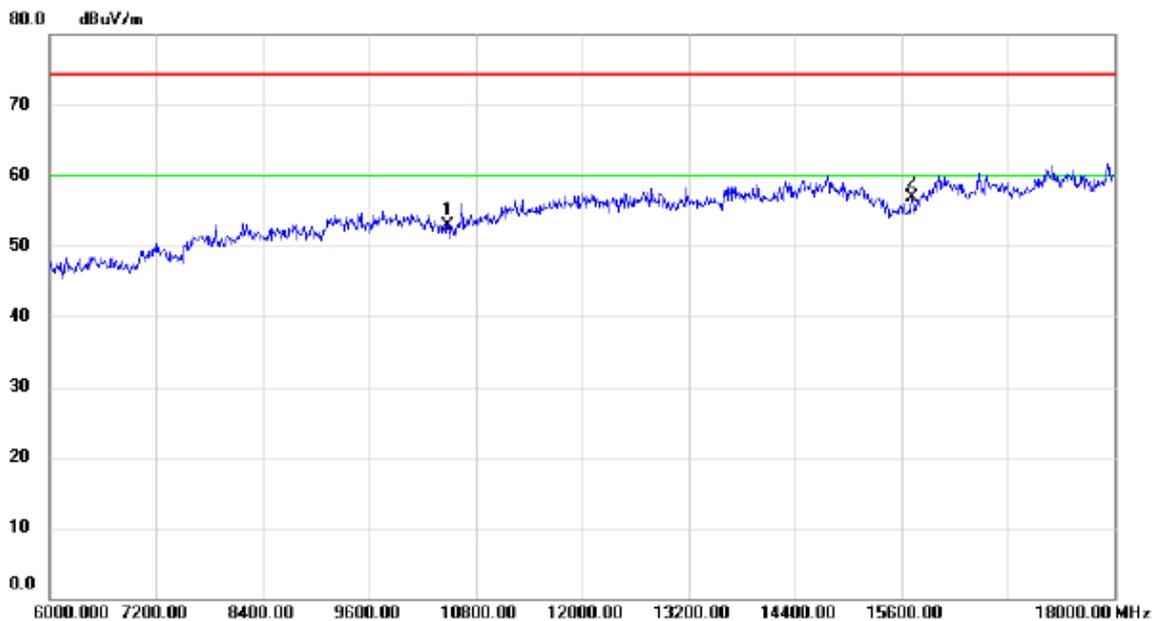


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10480.00	39.15	13.69	52.84	74.30	-21.46	peak	
2	*	15720.00	39.05	17.78	56.83	74.30	-17.47	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

### Vertical

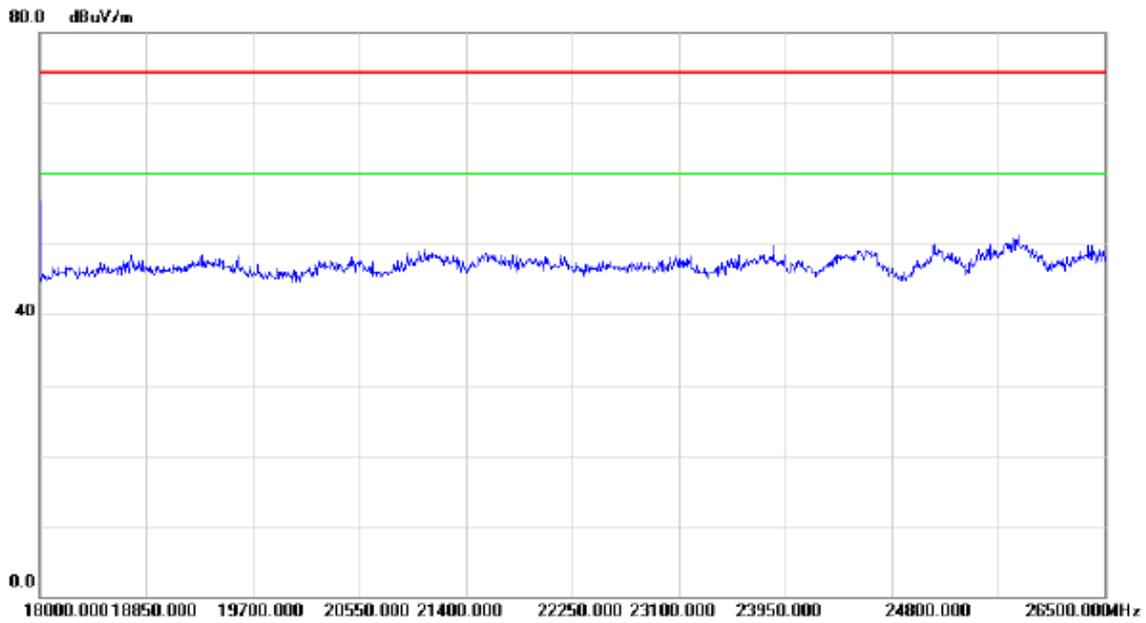


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

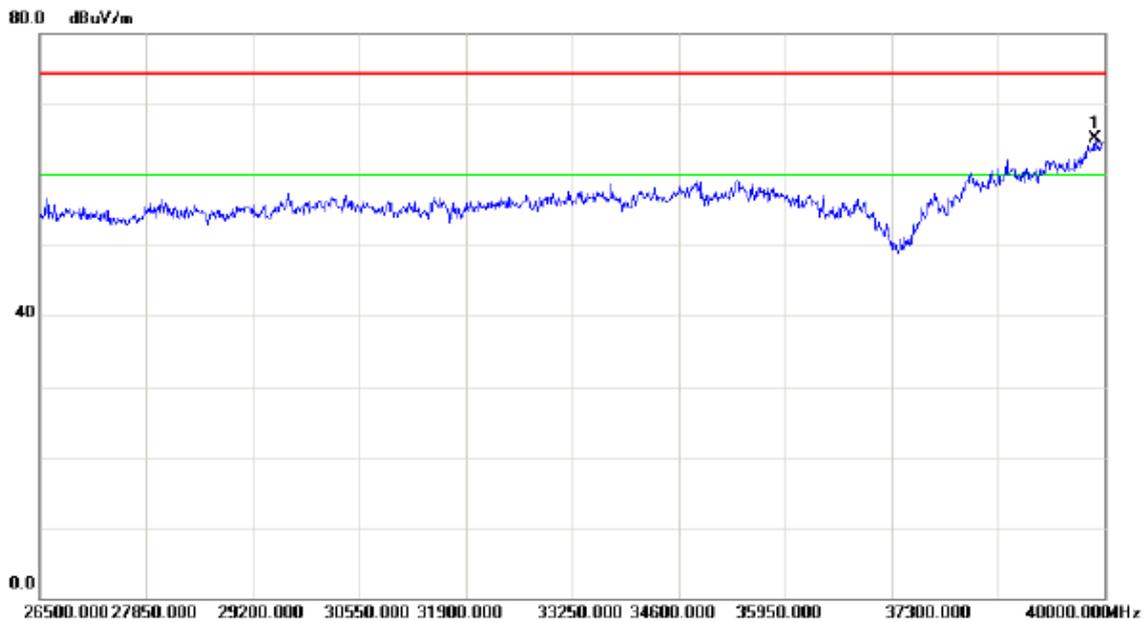

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39878.50	47.79	17.30	65.09	74.30	-9.21	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


### Horizontal

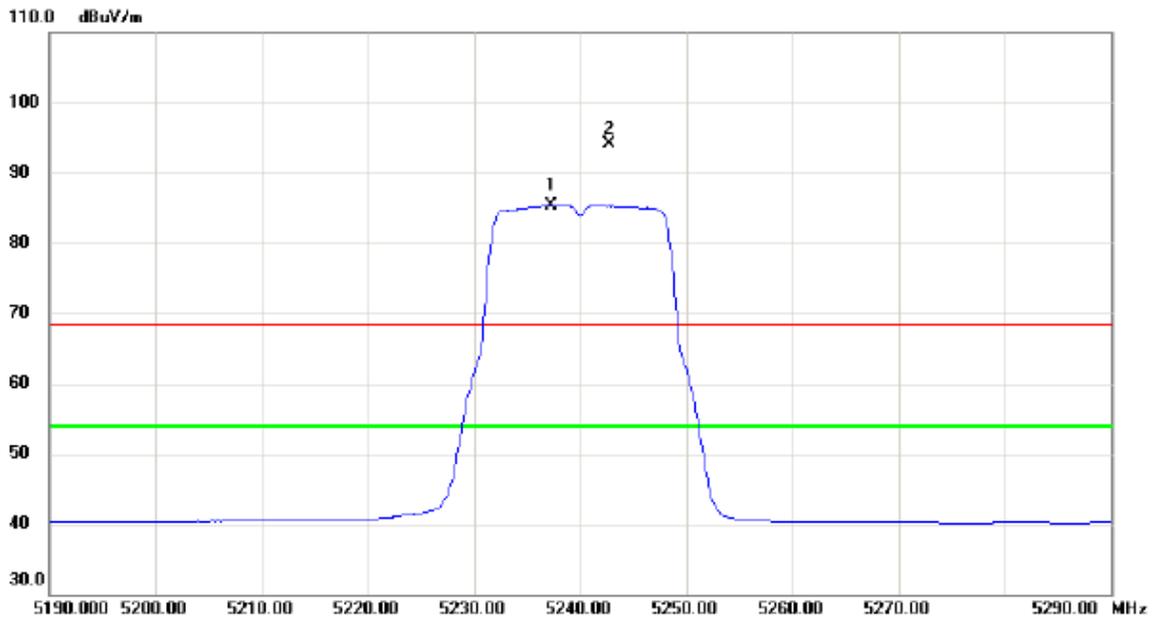


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5237.300	44.95	40.40	85.35	54.00	31.35	AVG	No Limit
2	X	5242.700	53.73	40.41	94.14	68.30	25.84	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

### Horizontal

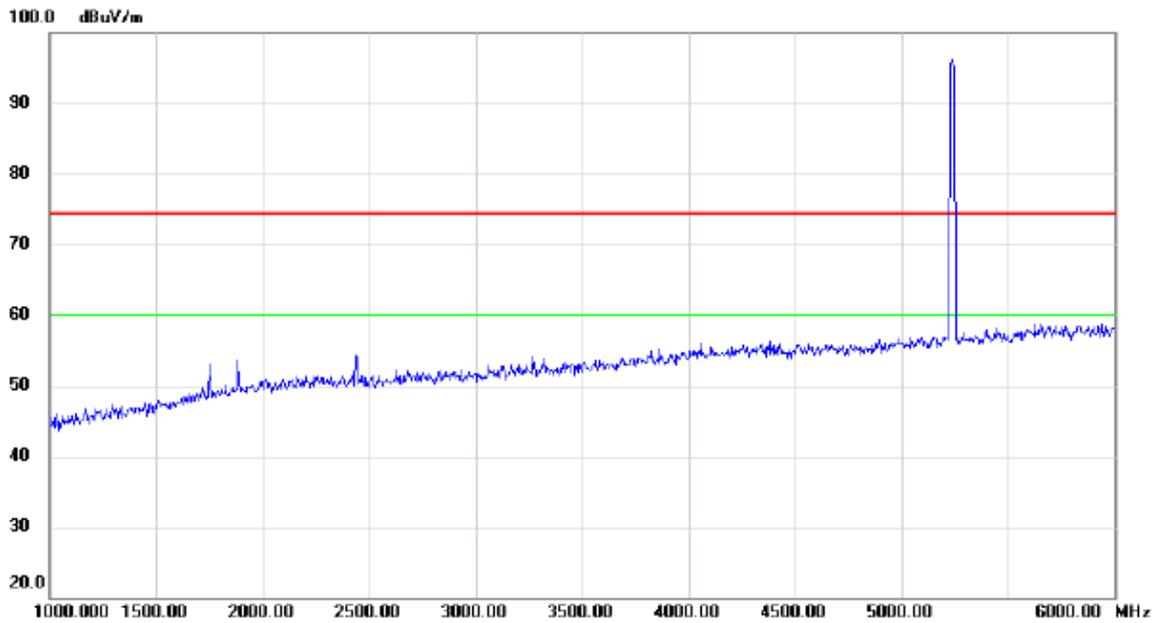


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

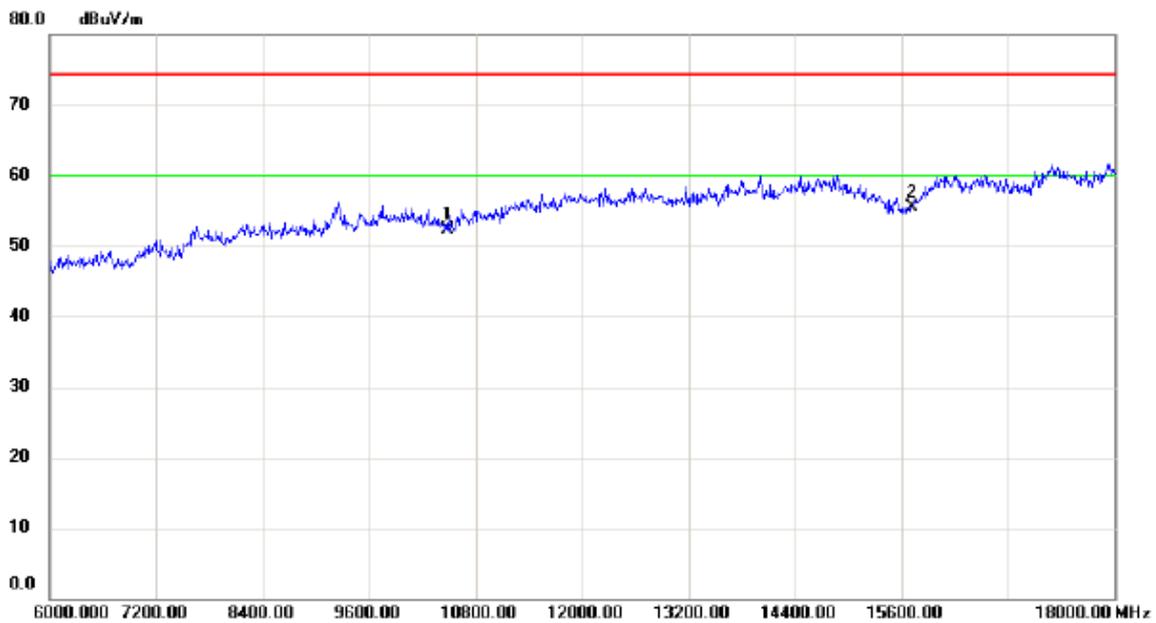


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10480.00	38.61	13.69	52.30	74.30	-22.00	peak	
2	*	15720.00	37.71	17.78	55.49	74.30	-18.81	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

### Horizontal

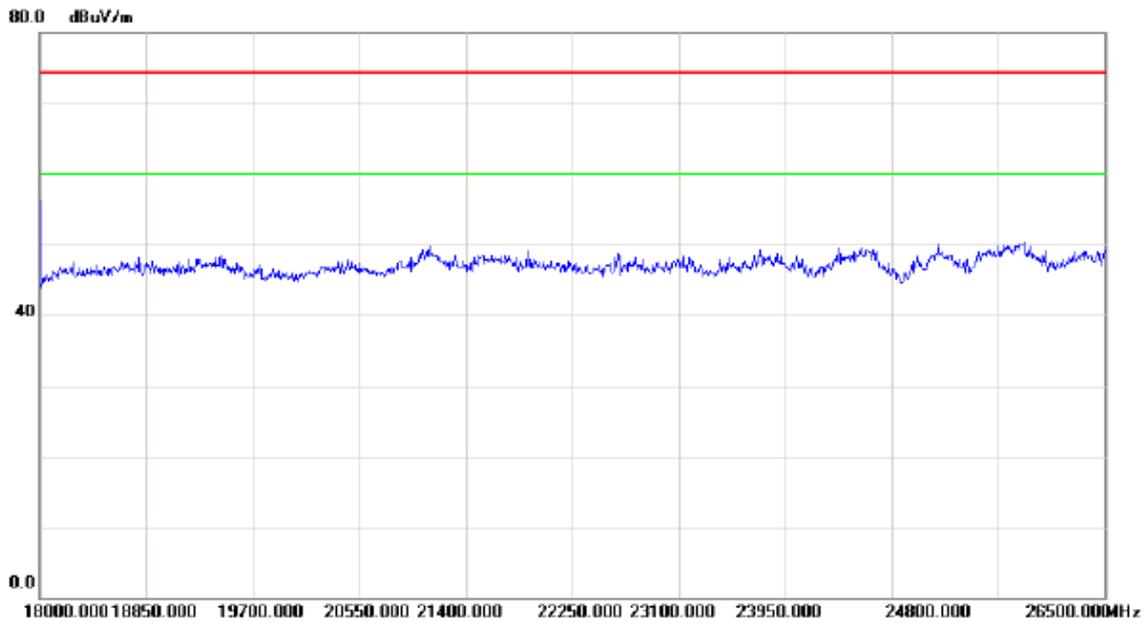


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

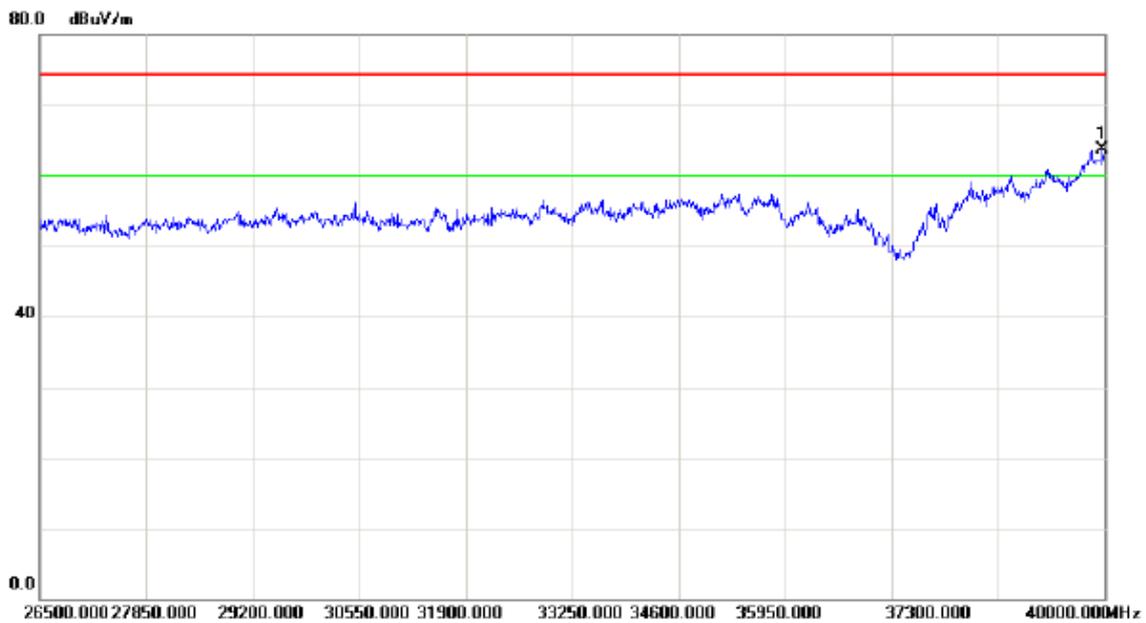

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39973.00	46.15	17.54	63.69	74.30	-10.61	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


### Vertical

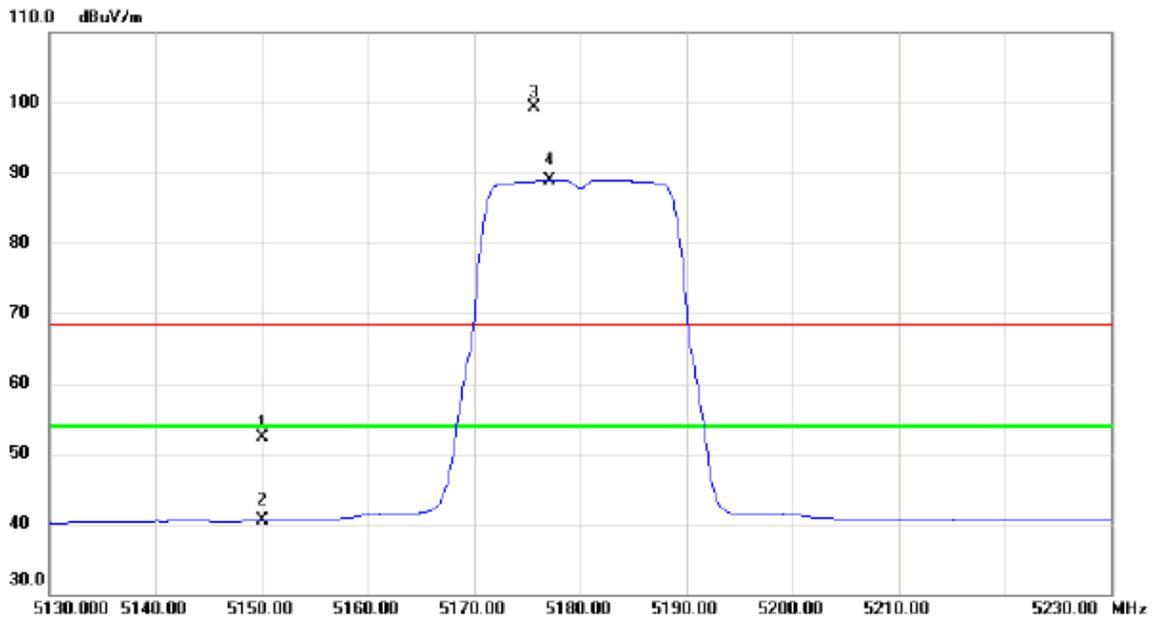


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5150.000	12.15	40.22	52.37	68.30	-15.93	peak	
2		5150.000	0.23	40.22	40.45	54.00	-13.55	AVG	
3	X	5175.600	59.07	40.27	99.34	68.30	31.04	peak	No Limit
4	*	5177.100	48.67	40.28	88.95	54.00	34.95	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

### Vertical

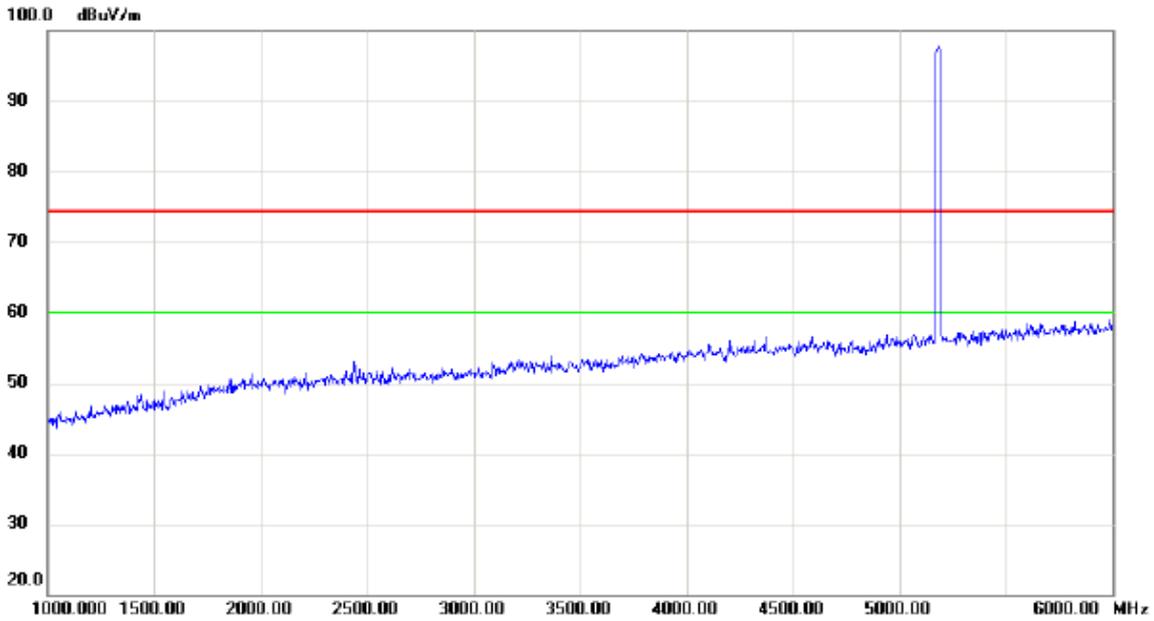


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

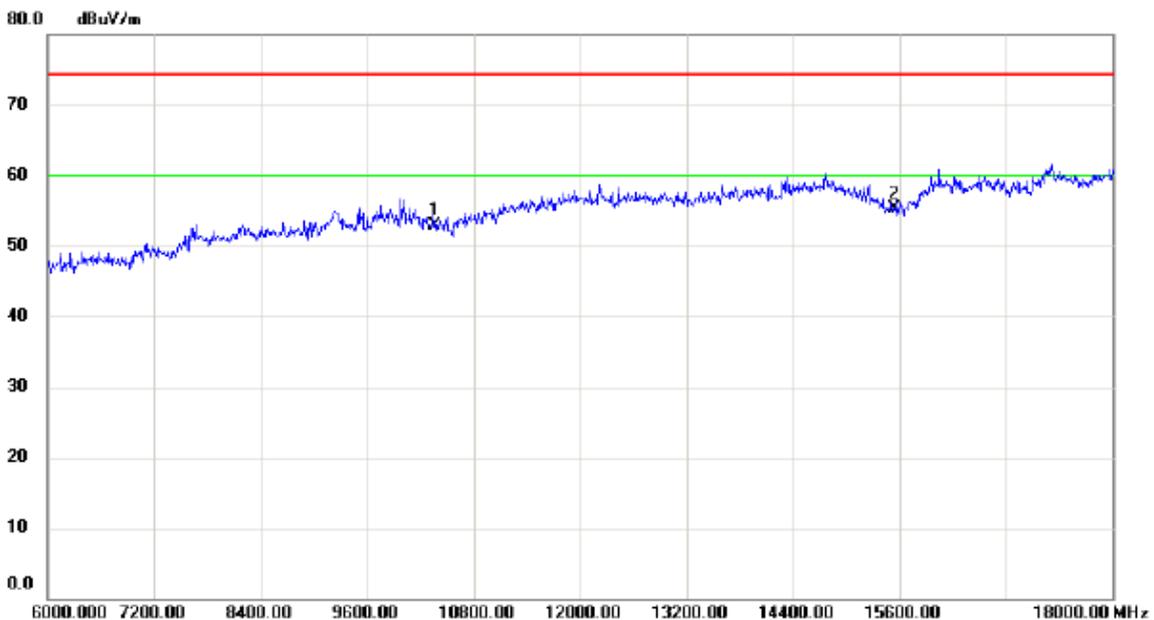


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10360.00	39.02	13.85	52.87	74.30	-21.43	peak	
2	*	15540.00	38.36	16.85	55.21	74.30	-19.09	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

### Vertical

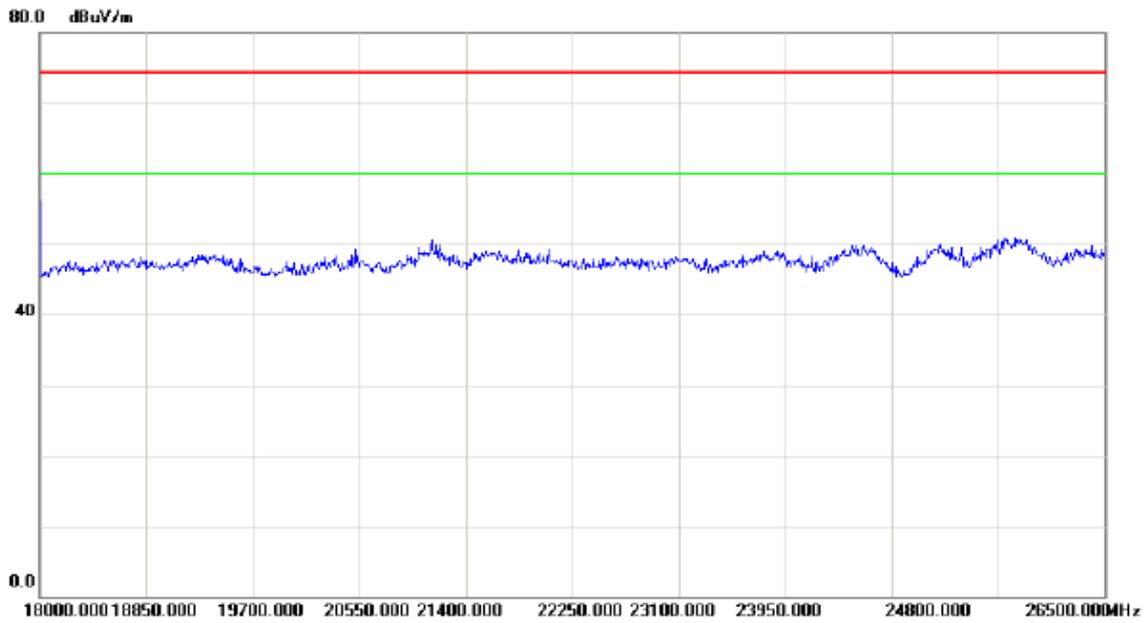


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

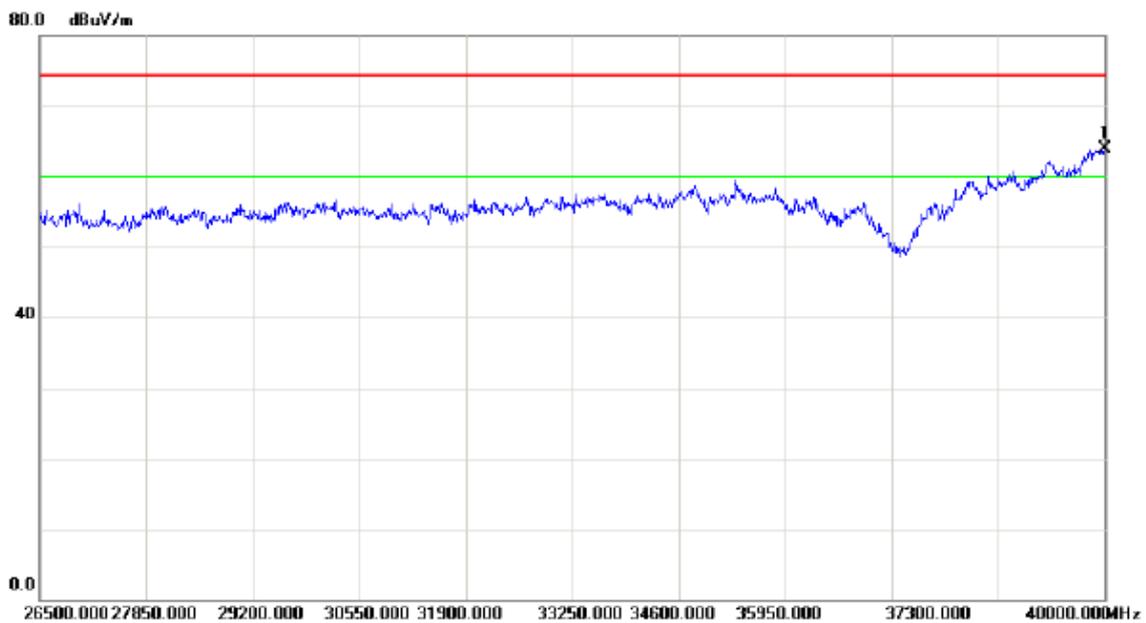

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	40000.00	46.22	17.60	63.82	74.30	-10.48	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


### Horizontal

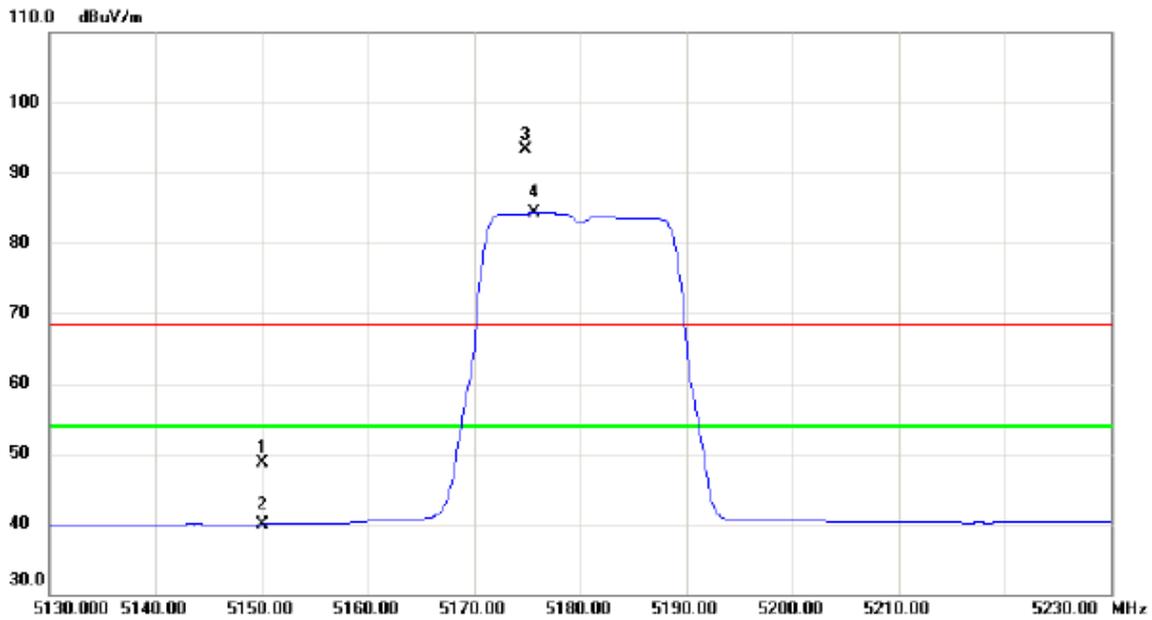


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	8.49	40.22	48.71	68.30	-19.59	peak	
2		5150.000	-0.23	40.22	39.99	54.00	-14.01	AVG	
3	X	5174.800	53.03	40.27	93.30	68.30	25.00	peak	No Limit
4	*	5175.700	43.98	40.27	84.25	54.00	30.25	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

### Horizontal

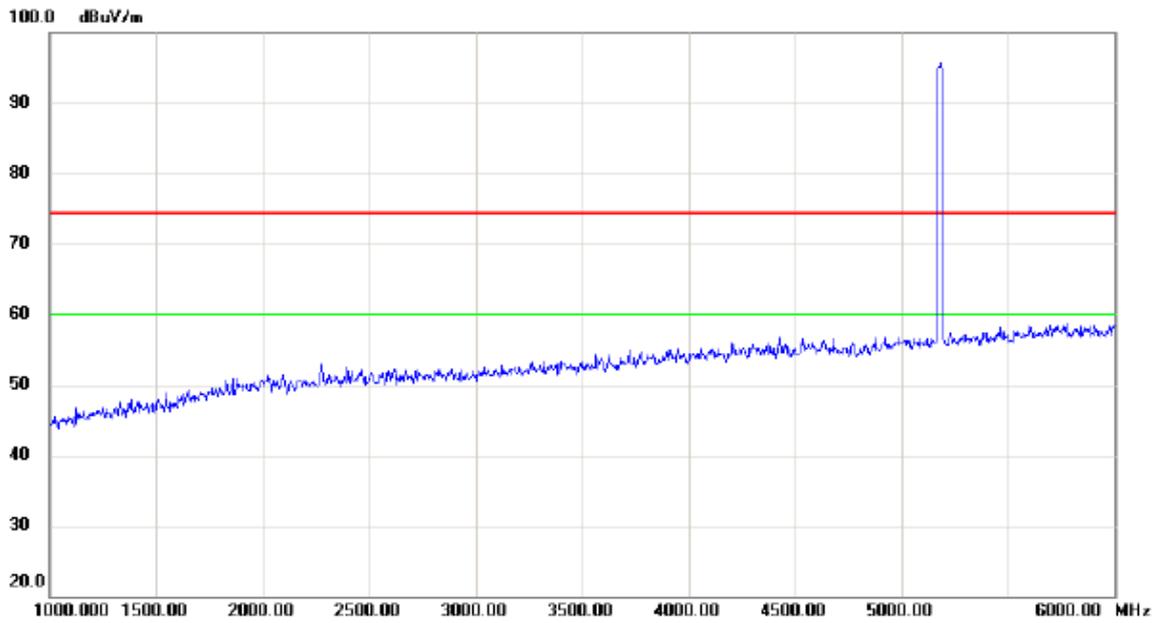


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

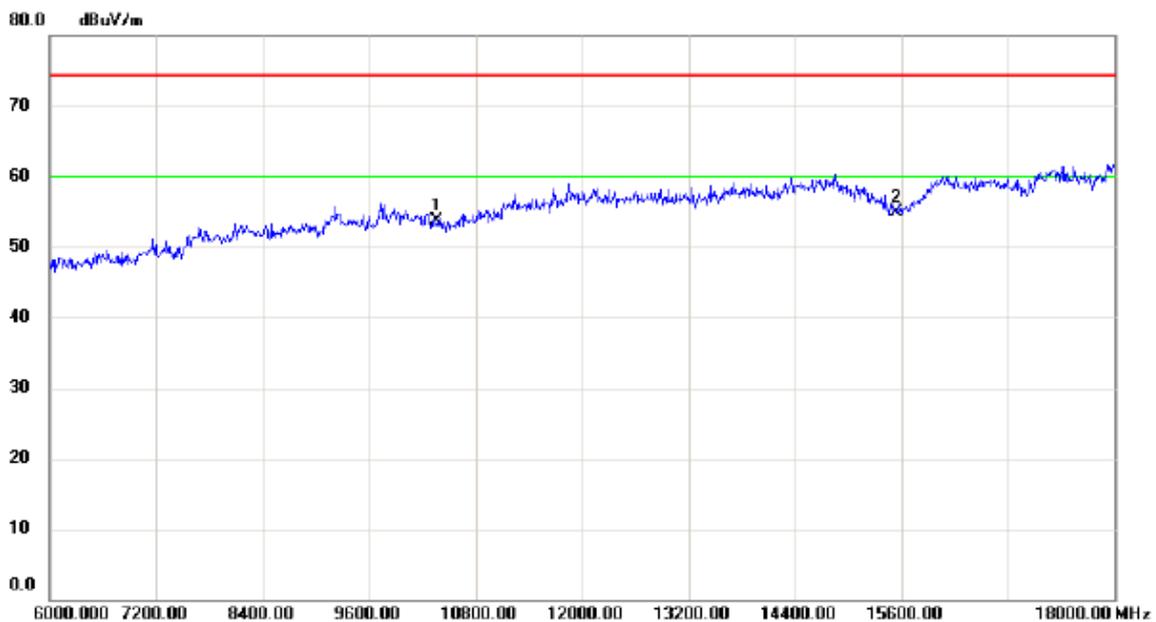


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10360.00	39.83	13.85	53.68	74.30	-20.62	peak	
2	*	15540.00	38.10	16.85	54.95	74.30	-19.35	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

### Horizontal

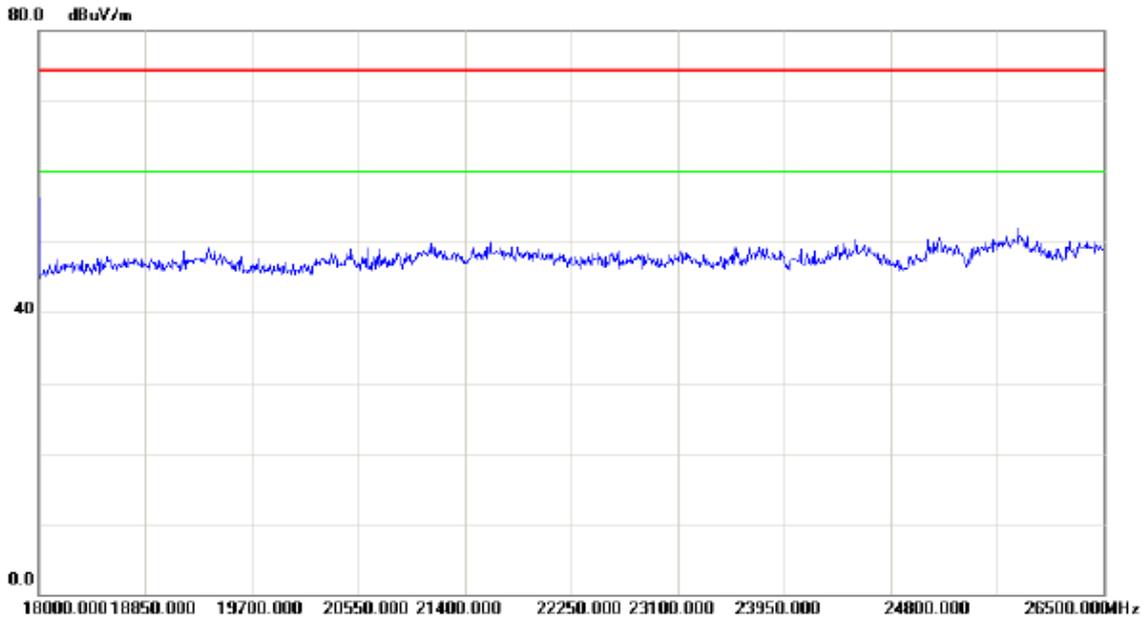


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

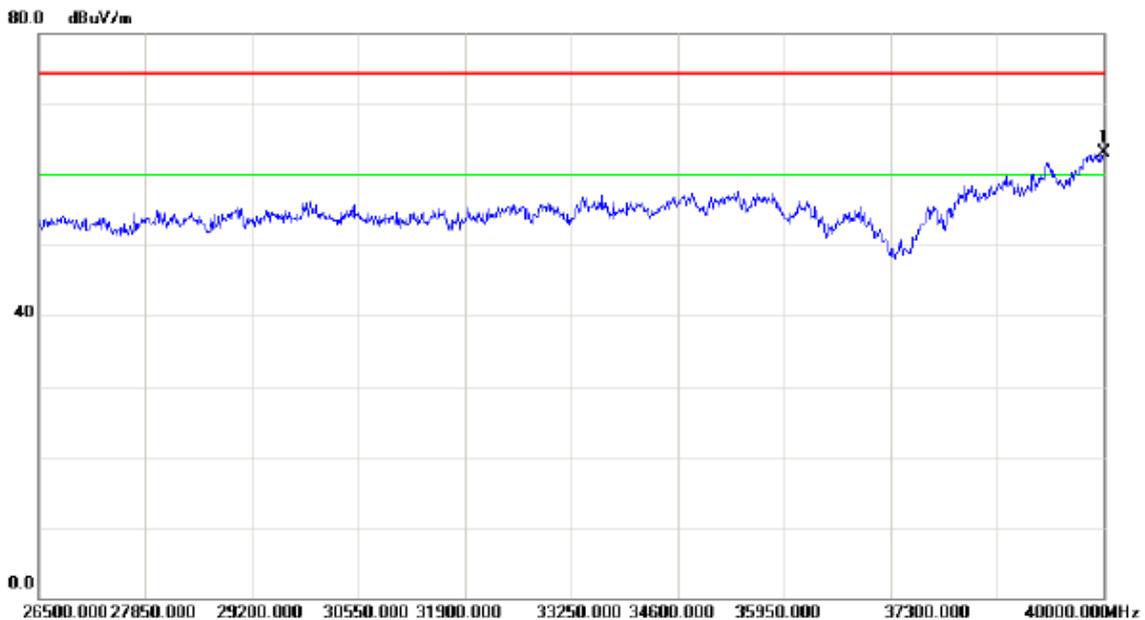

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	40000.00	45.58	17.60	63.18	74.30	-11.12	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


**Vertical**

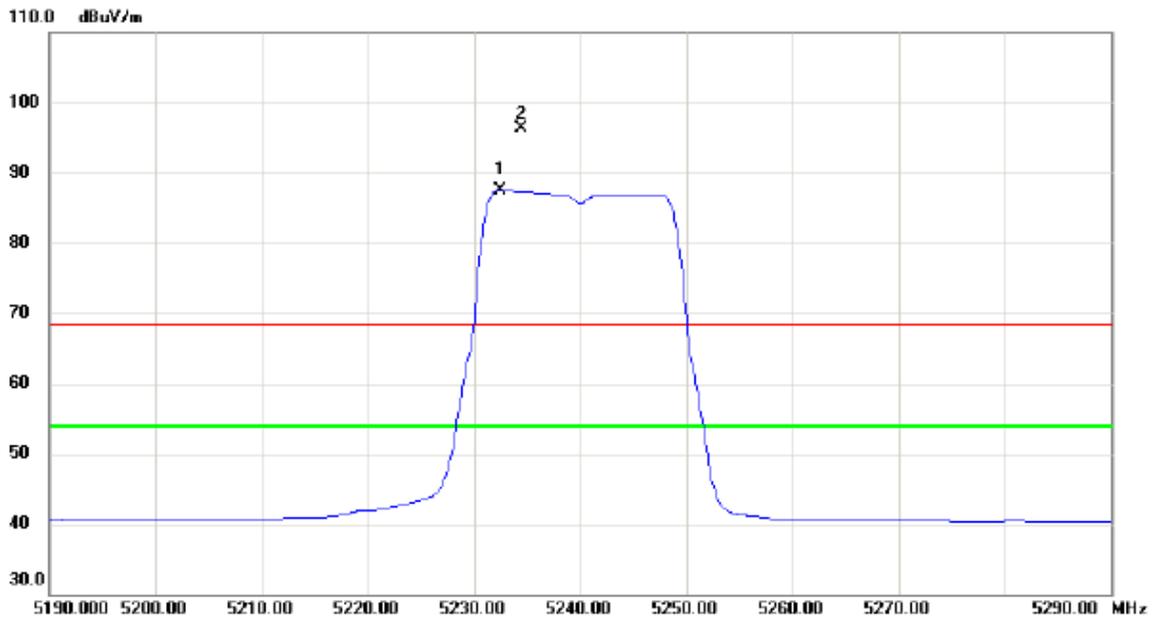


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5232.500	47.16	40.39	87.55	54.00	33.55	AVG	No Limit
2	X	5234.500	55.87	40.39	96.26	68.30	27.96	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

### Vertical

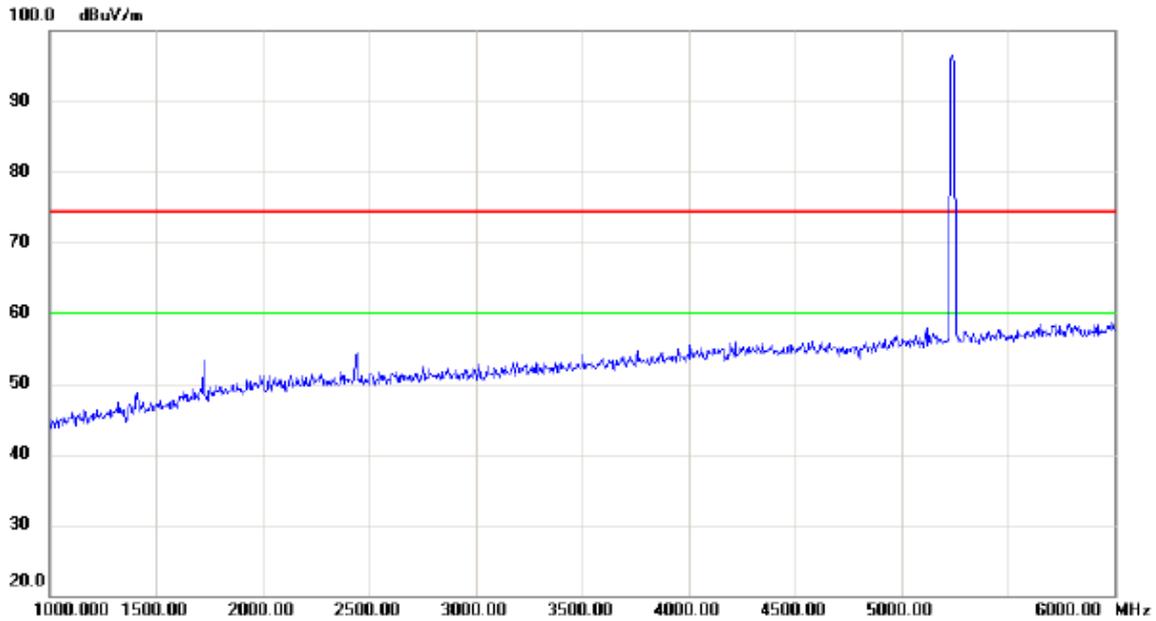


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

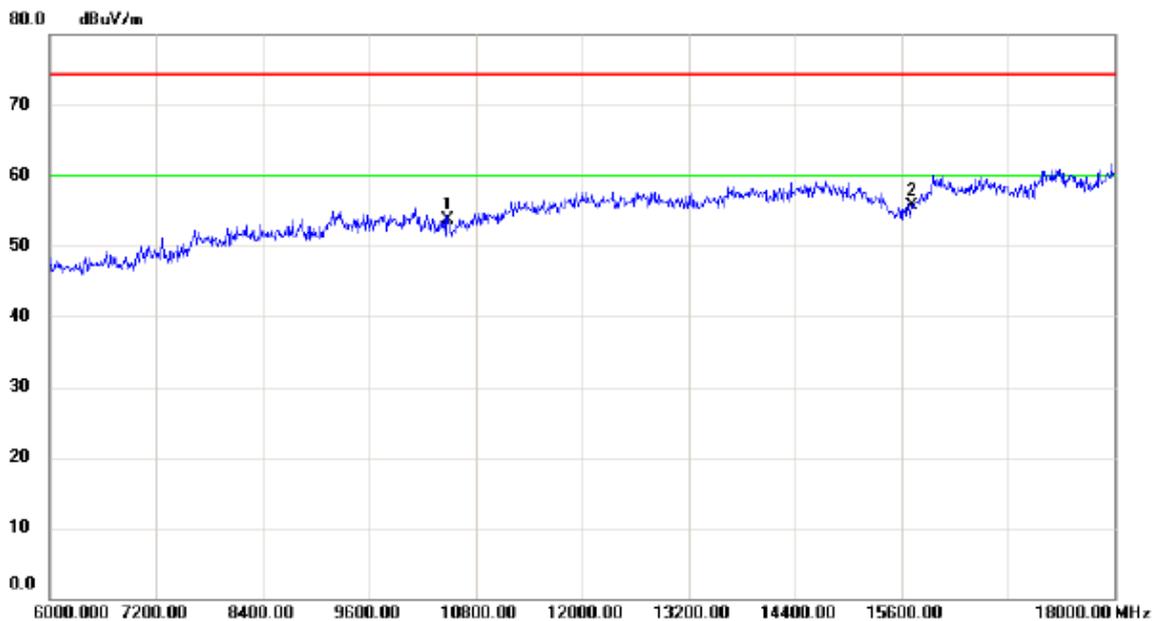


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10480.00	39.99	13.69	53.68	74.30	-20.62	peak	
2	*	15720.00	37.99	17.78	55.77	74.30	-18.53	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

### Vertical

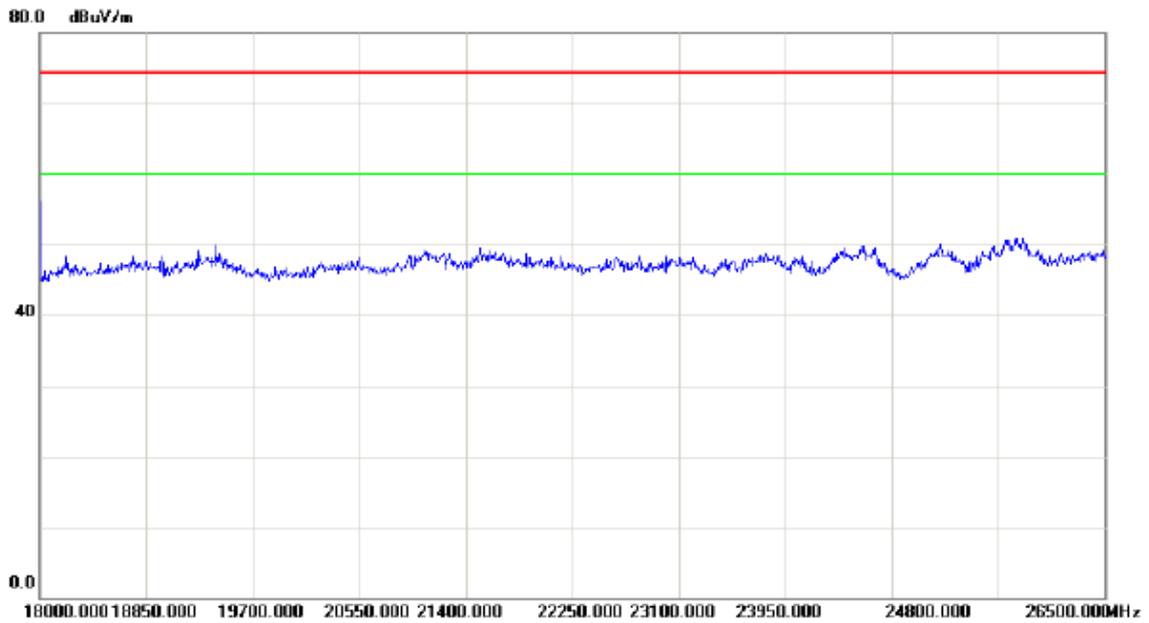


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

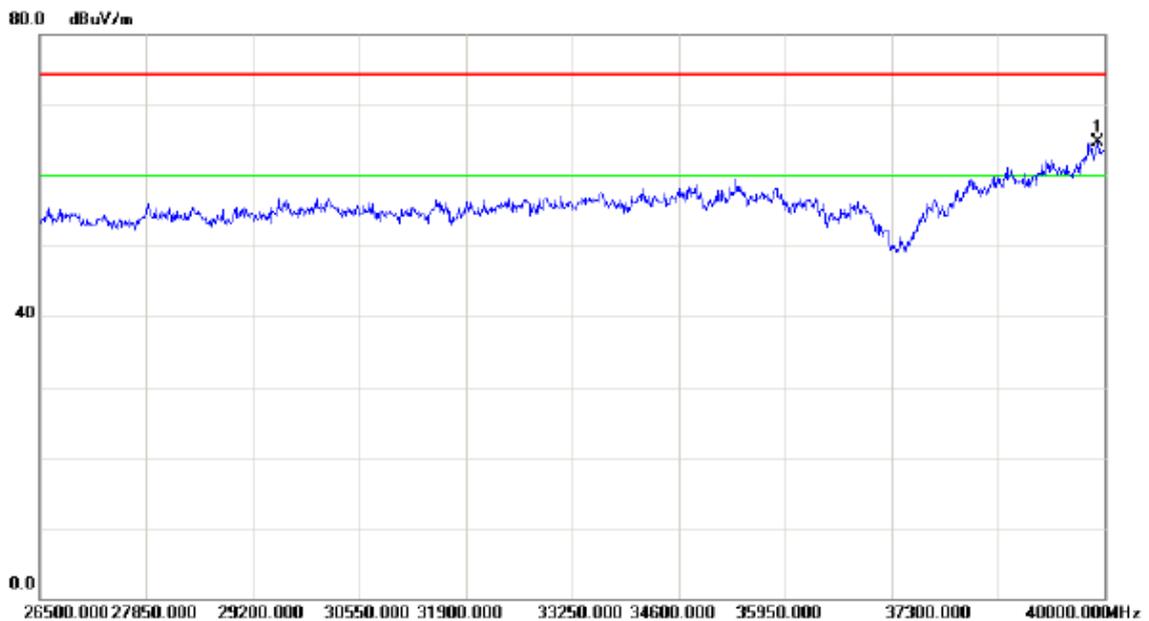

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39919.00	47.26	17.40	64.66	74.30	-9.64	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


### Horizontal

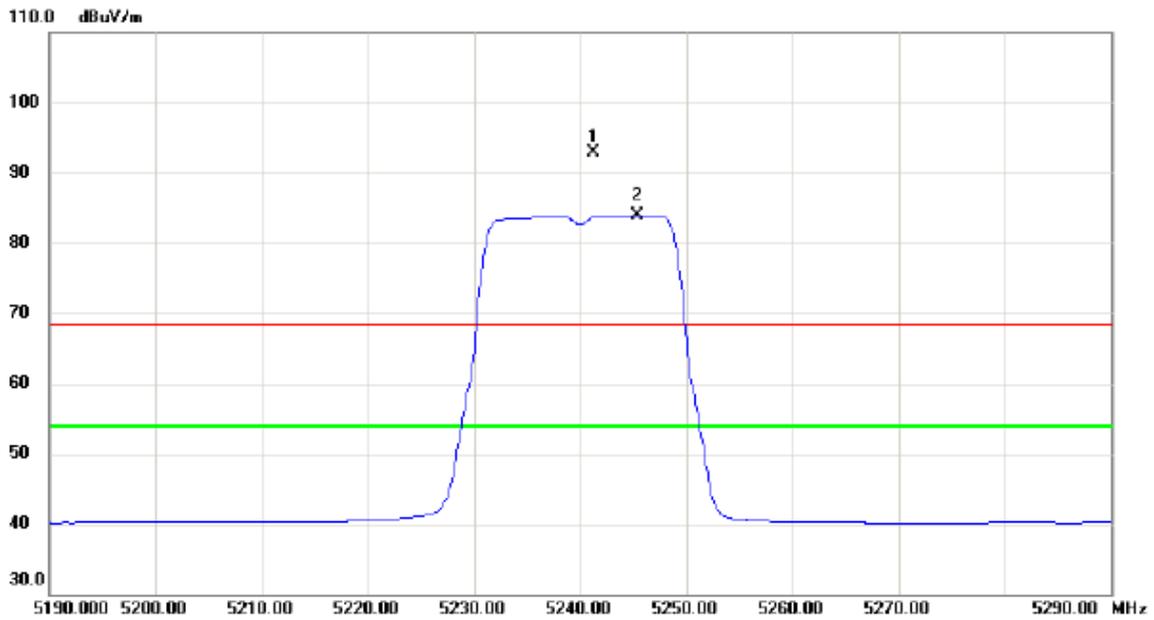


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5241.300	52.47	40.41	92.88	68.30	24.58	peak	No Limit
2	*	5245.400	43.47	40.42	83.89	54.00	29.89	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

### Horizontal

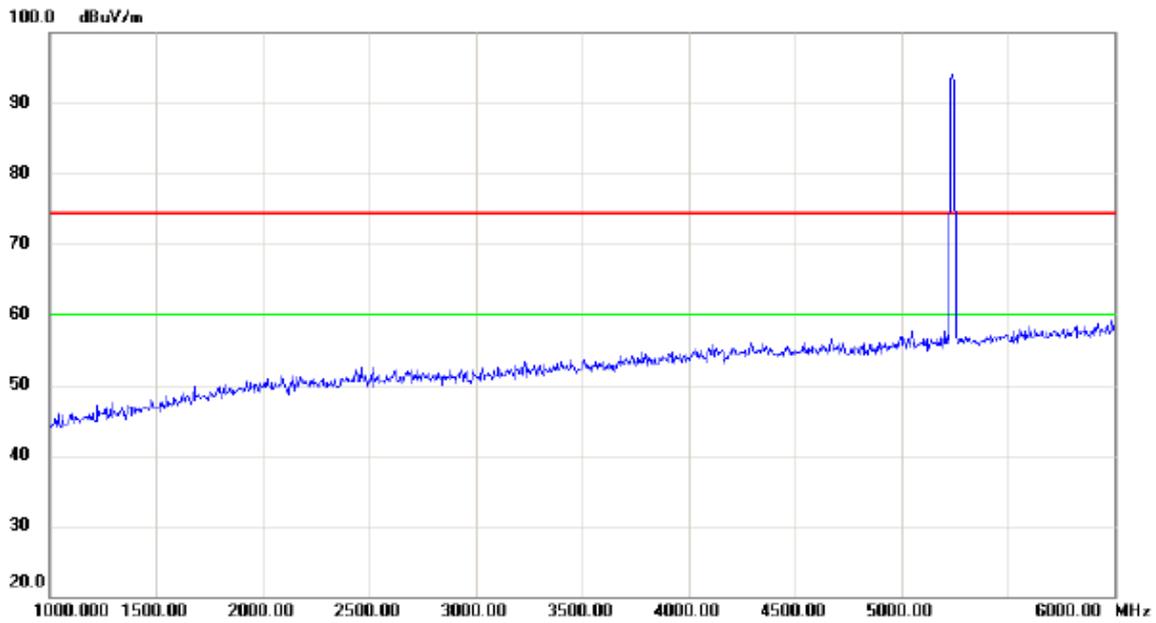


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

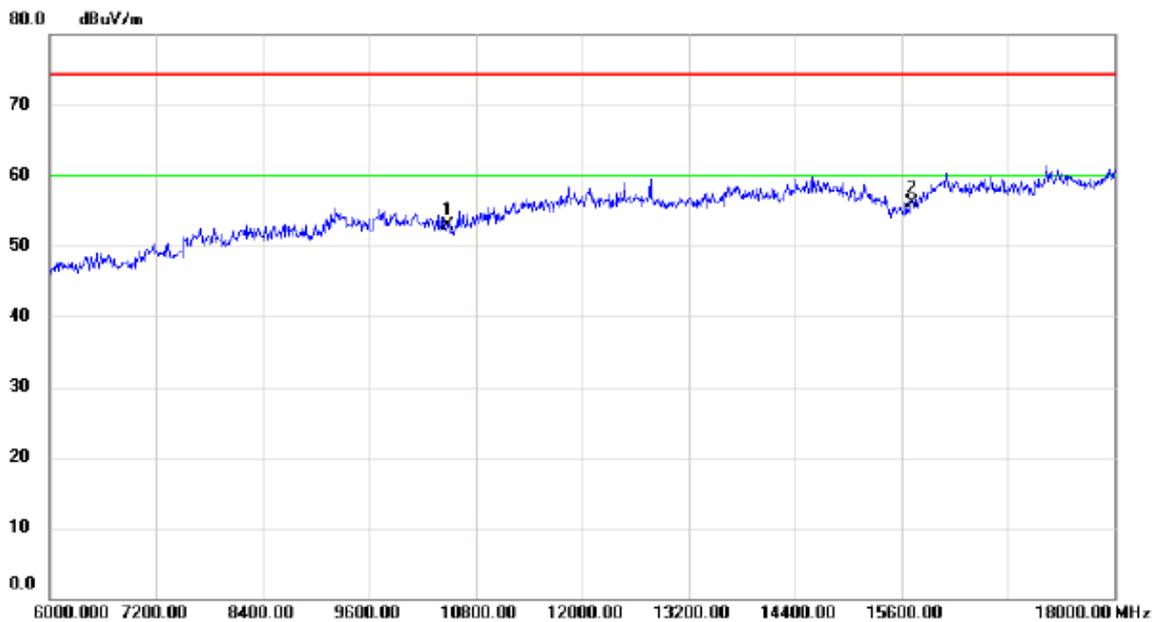


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10480.00	39.22	13.69	52.91	74.30	-21.39	peak	
2	*	15720.00	38.27	17.78	56.05	74.30	-18.25	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

### Horizontal

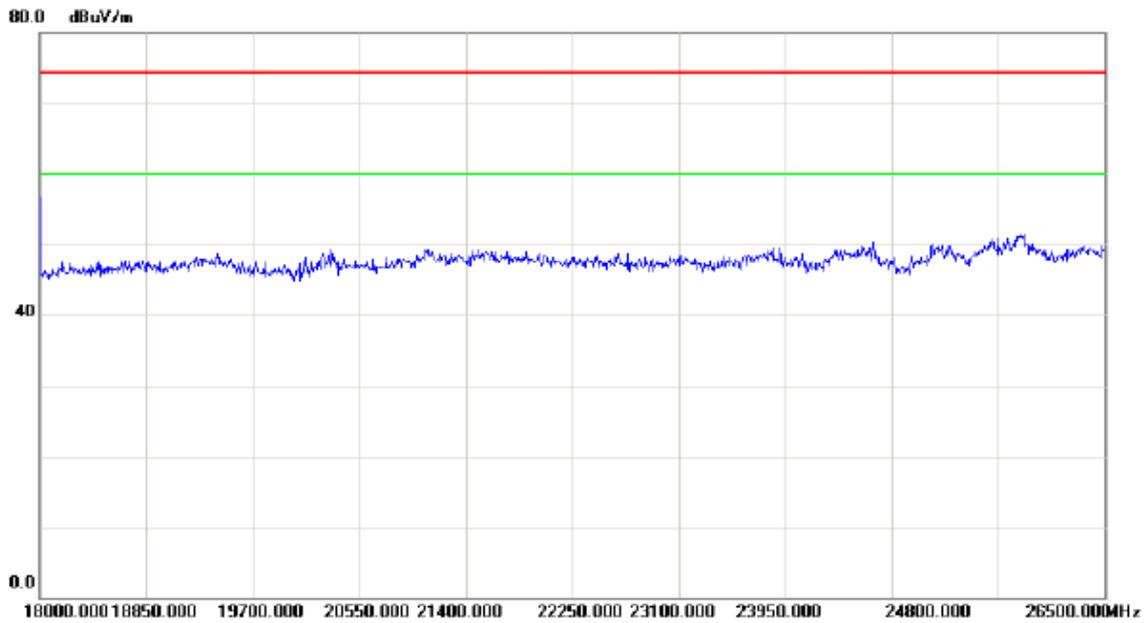


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

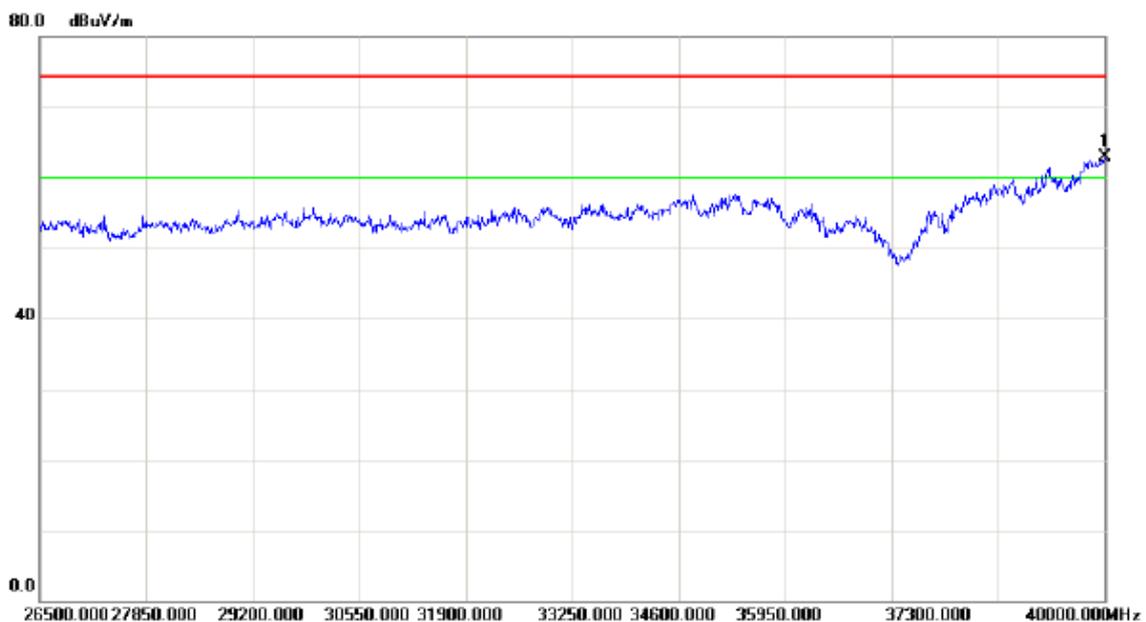

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	40000.00	45.27	17.60	62.87	74.30	-11.43	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


### Vertical

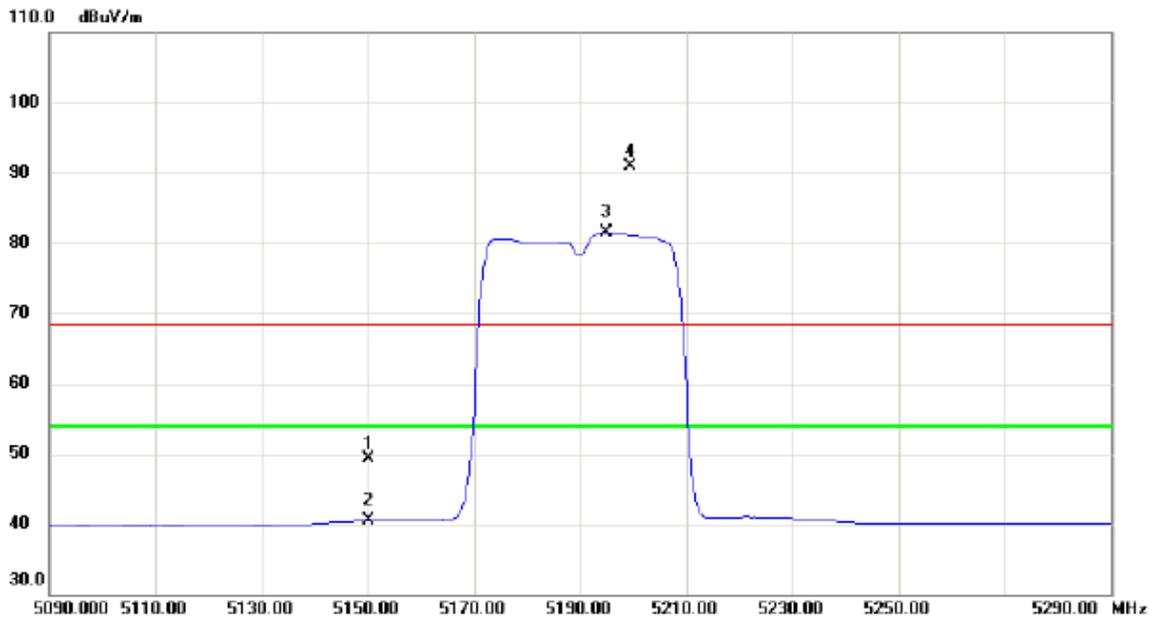


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	9.11	40.22	49.33	68.30	-18.97	peak	
2		5150.000	0.32	40.22	40.54	54.00	-13.46	AVG	
3	*	5194.800	41.17	40.32	81.49	54.00	27.49	AVG	No Limit
4	X	5199.400	50.63	40.32	90.95	68.30	22.65	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

### Vertical

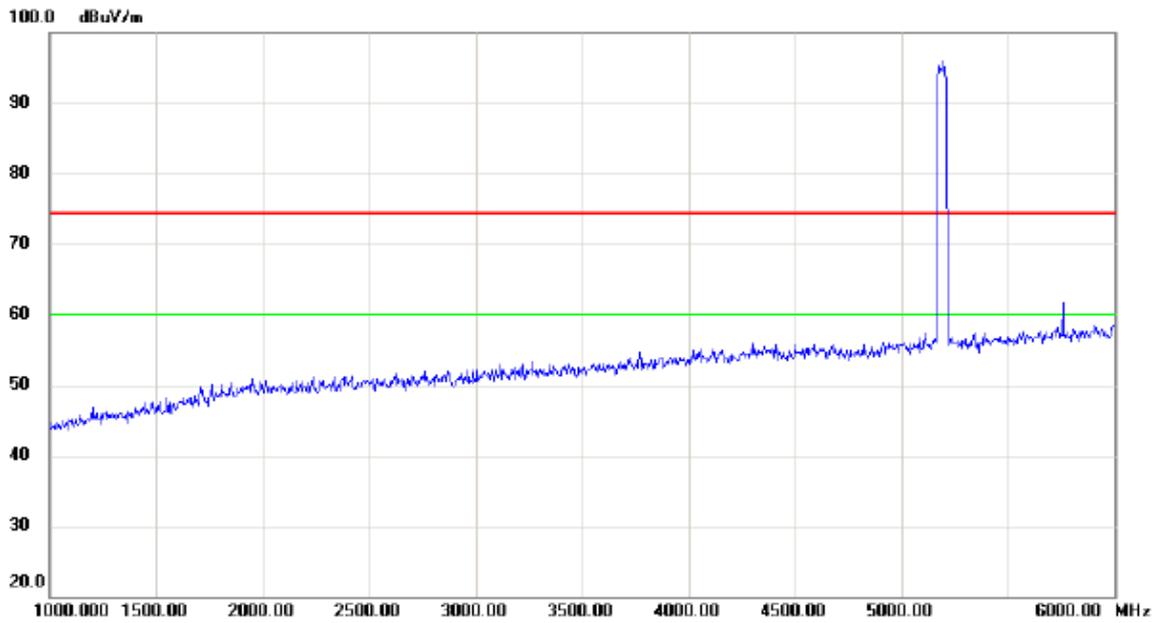


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

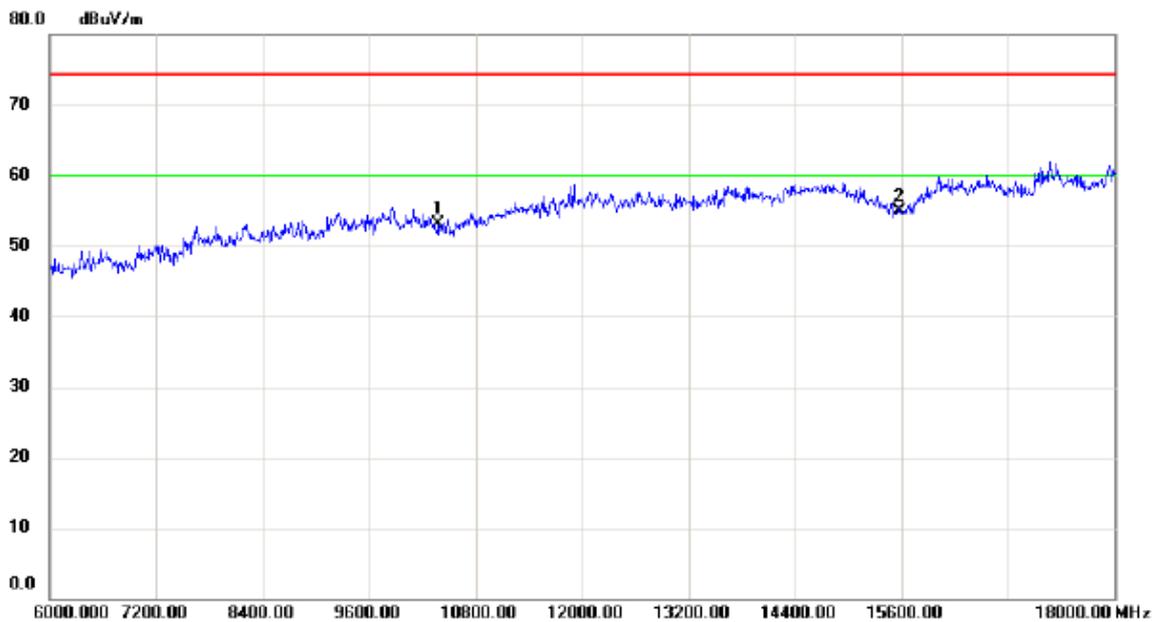


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10380.00	39.22	13.83	53.05	74.30	-21.25	peak	
2	*	15570.00	37.86	17.00	54.86	74.30	-19.44	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

### Vertical

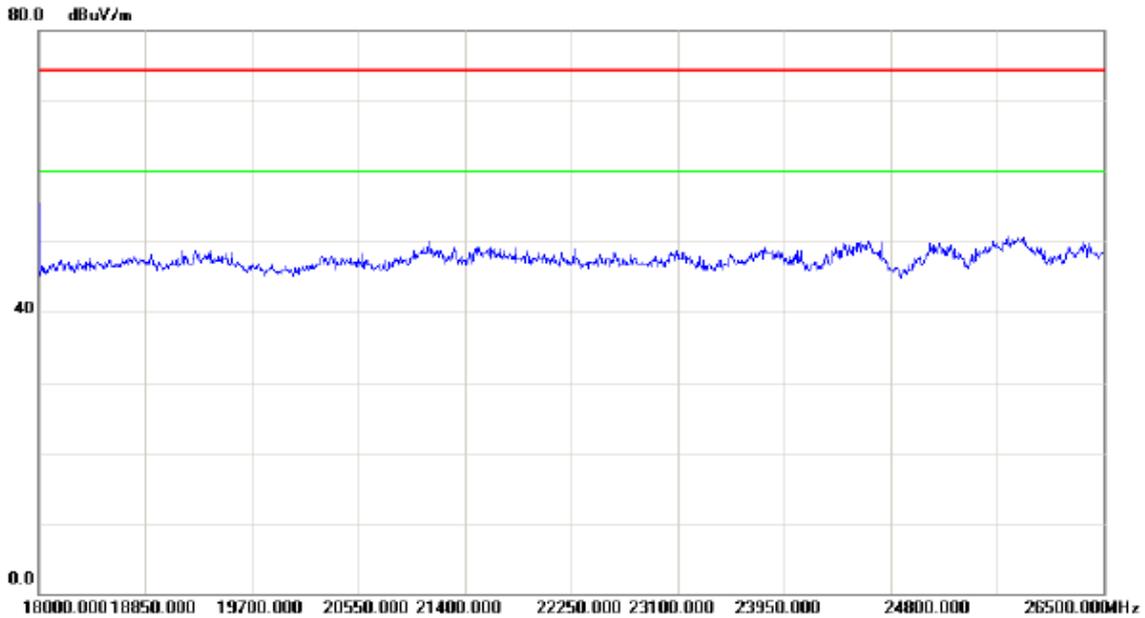


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

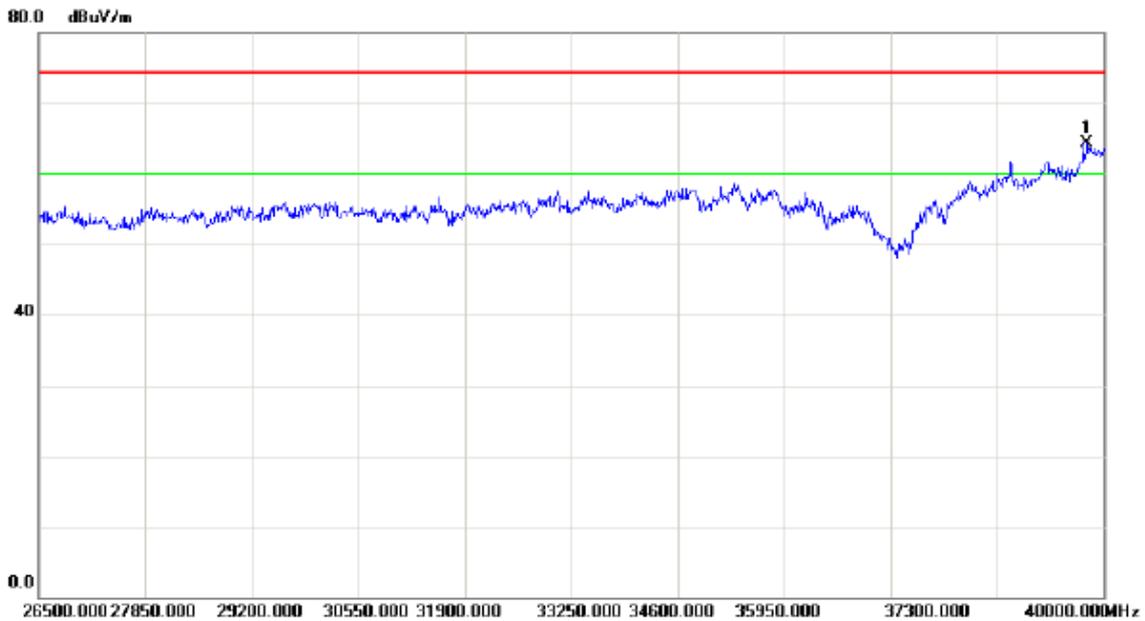

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	39797.50	47.16	17.11	64.27	74.30	-10.03	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


### Horizontal

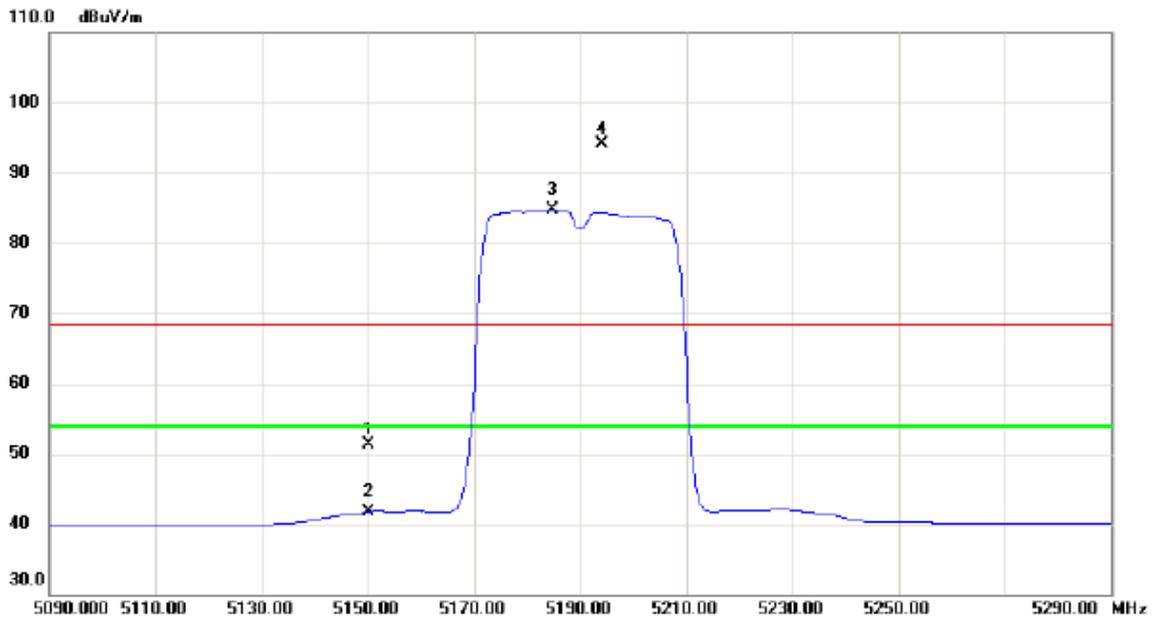


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	11.05	40.22	51.27	68.30	-17.03	peak	
2		5150.000	1.50	40.22	41.72	54.00	-12.28	AVG	
3	*	5184.800	44.46	40.29	84.75	54.00	30.75	AVG	No Limit
4	X	5194.000	53.72	40.32	94.04	68.30	25.74	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

### Horizontal

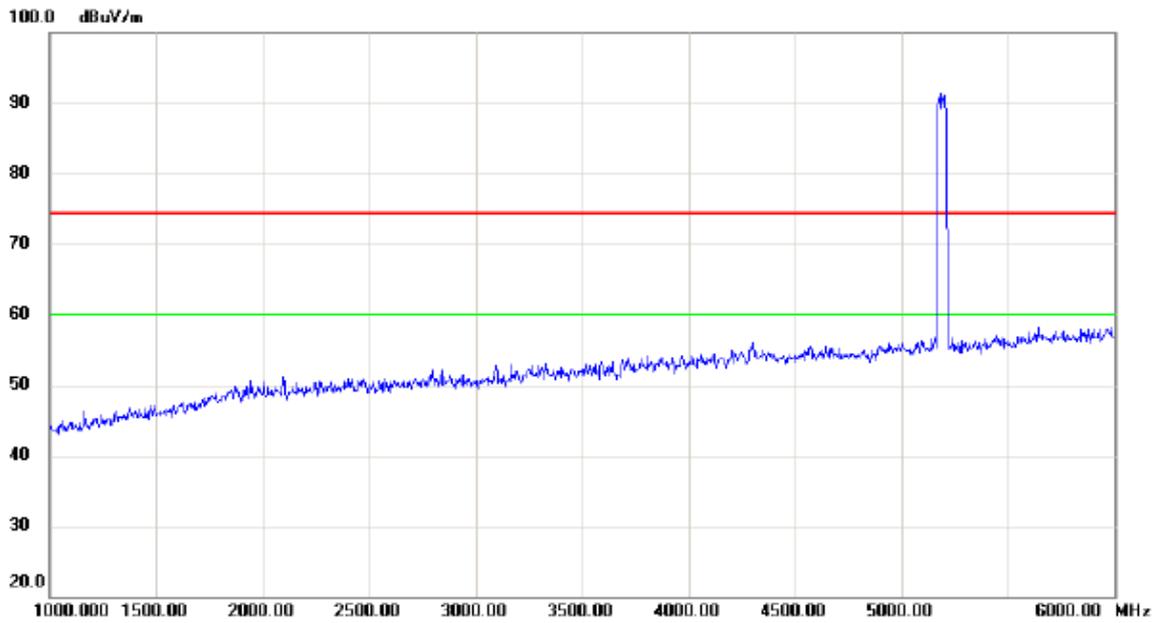


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

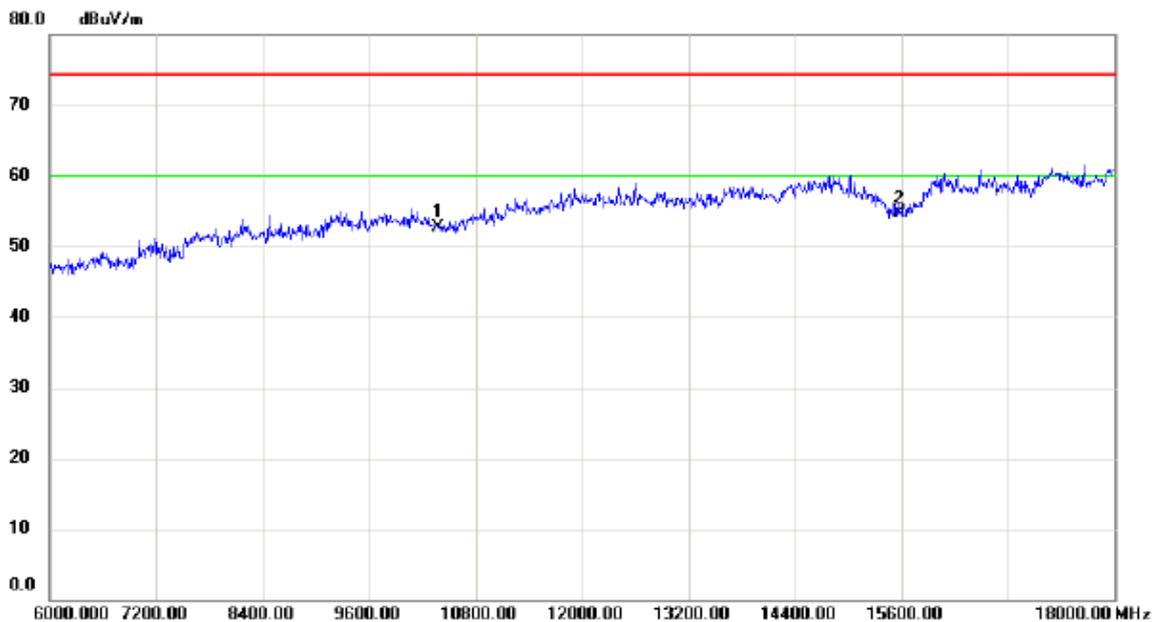


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10380.00	38.80	13.83	52.63	74.30	-21.67	peak	
2	*	15570.00	37.77	17.00	54.77	74.30	-19.53	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

### Horizontal

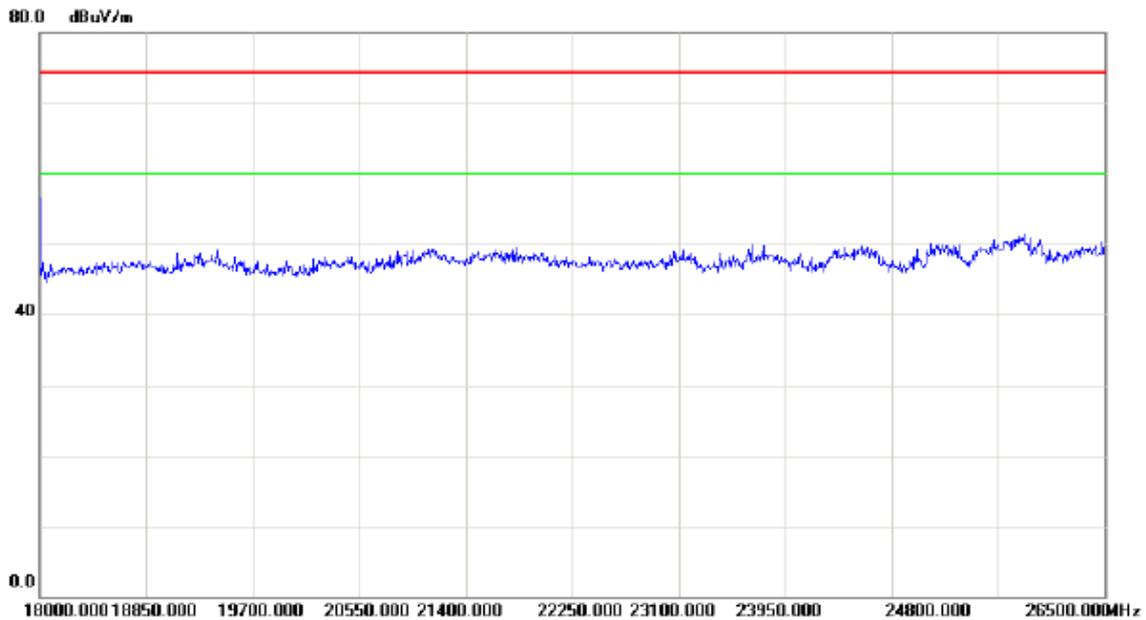


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

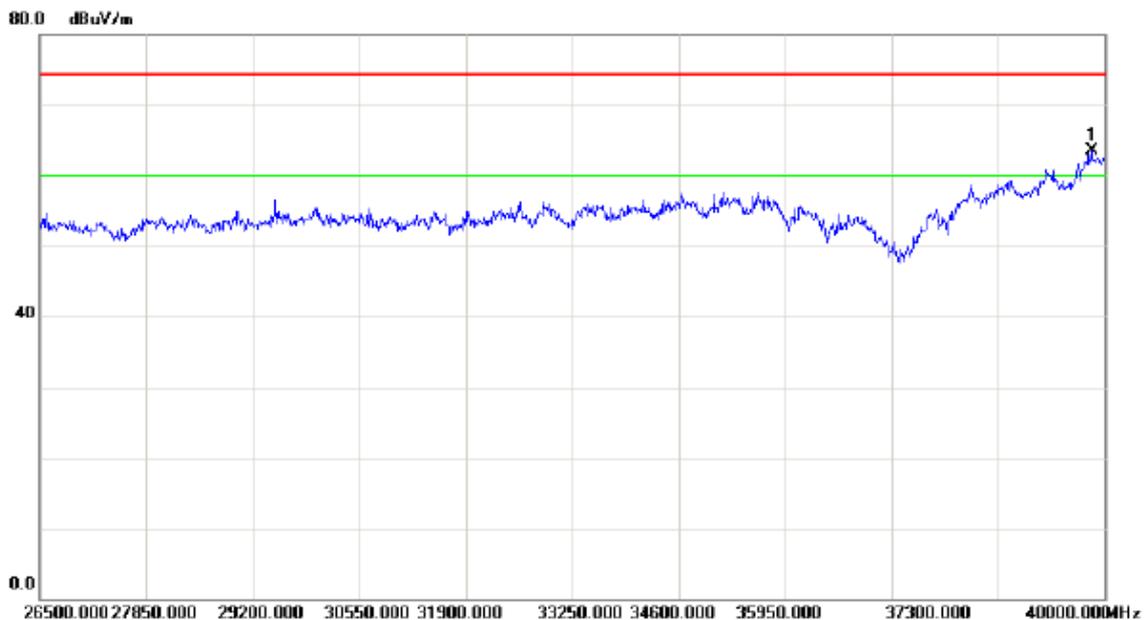

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39838.00	46.35	17.21	63.56	74.30	-10.74	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


### Vertical

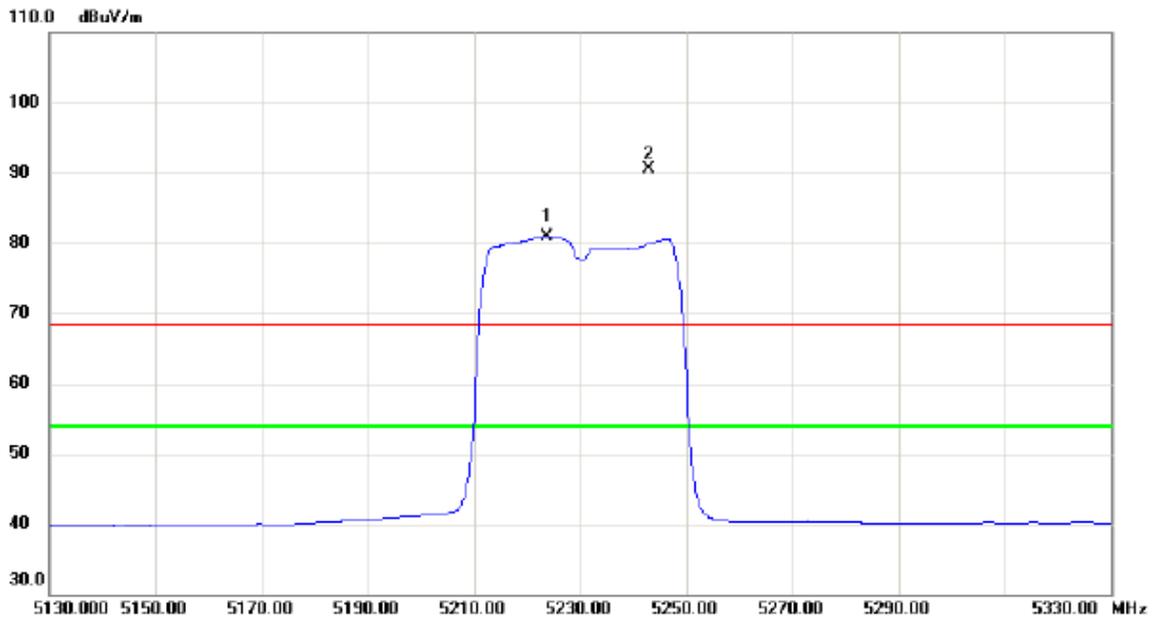


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5223.800	40.46	40.38	80.84	54.00	26.84	AVG	No Limit
2	X	5242.800	50.19	40.41	90.60	68.30	22.30	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

### Vertical

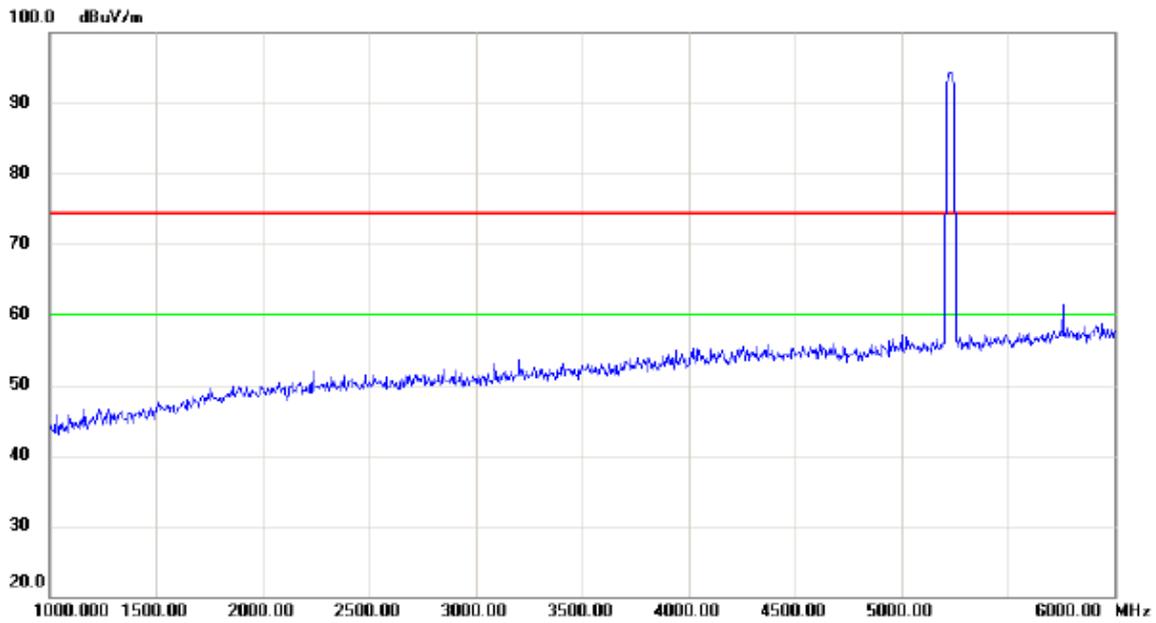


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

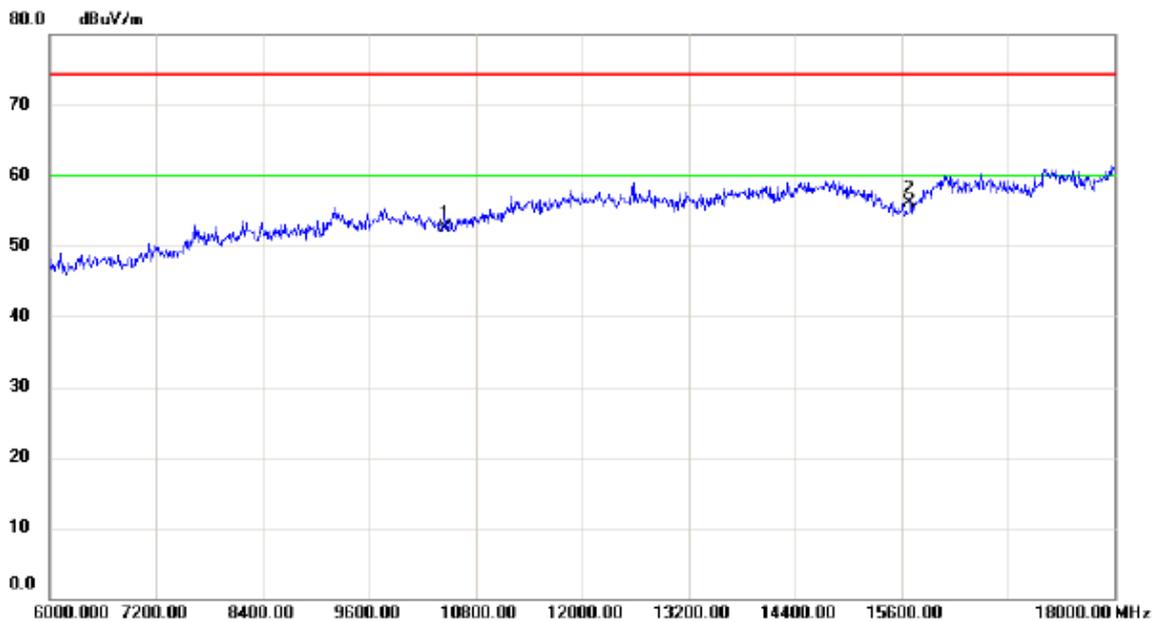


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10460.00	38.78	13.71	52.49	74.30	-21.81	peak	
2	*	15690.00	38.42	17.63	56.05	74.30	-18.25	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

### Vertical

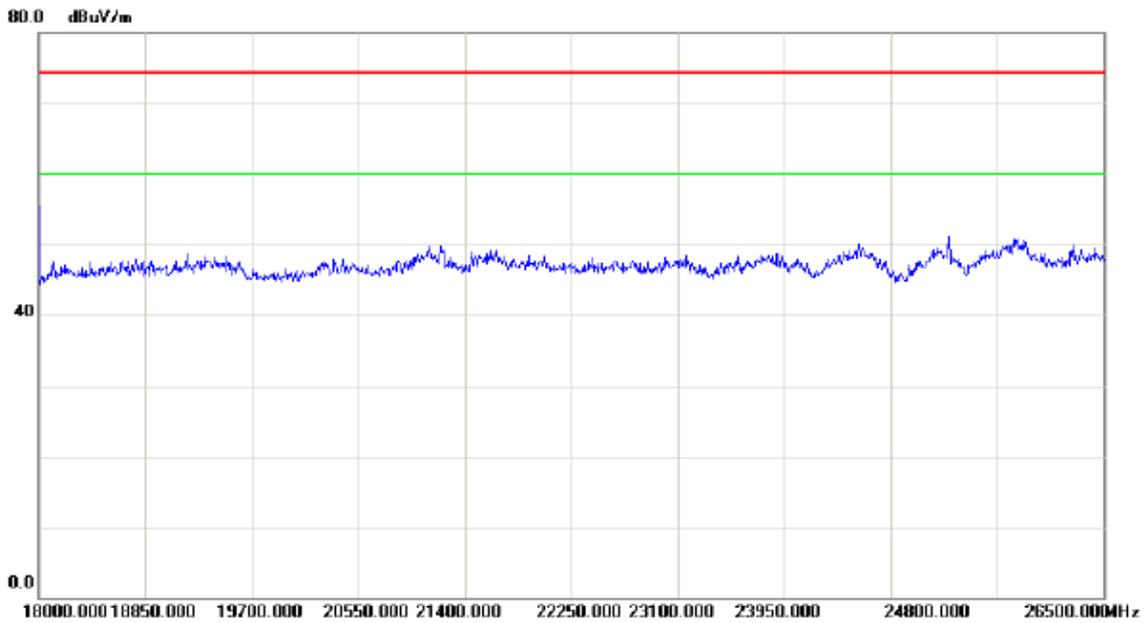


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

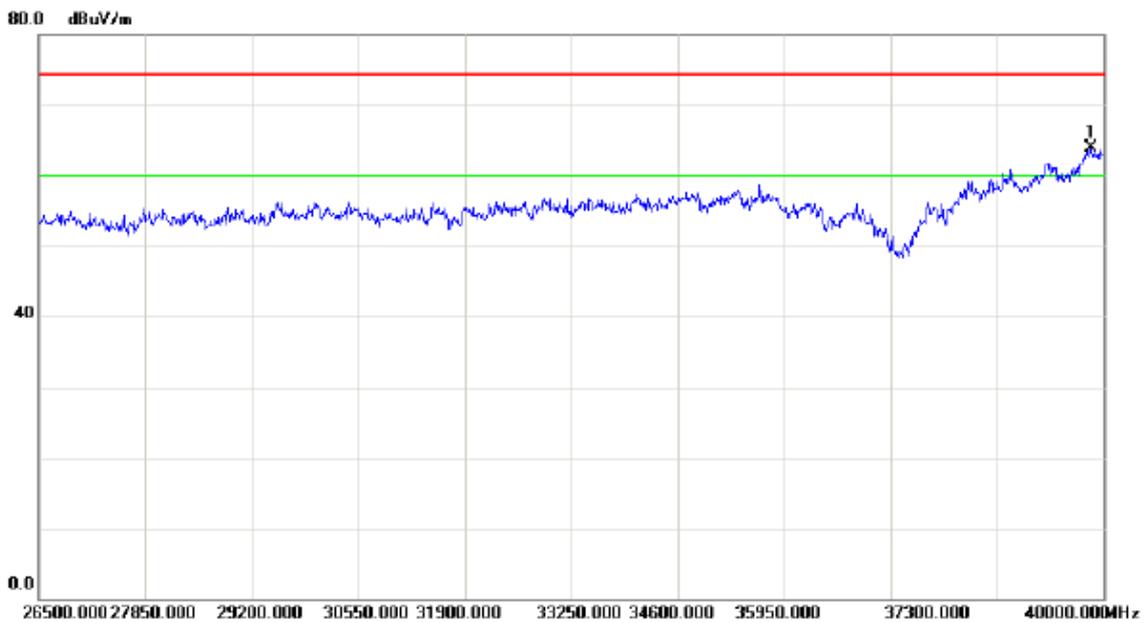

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39851.50	46.75	17.23	63.98	74.30	-10.32	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


### Horizontal

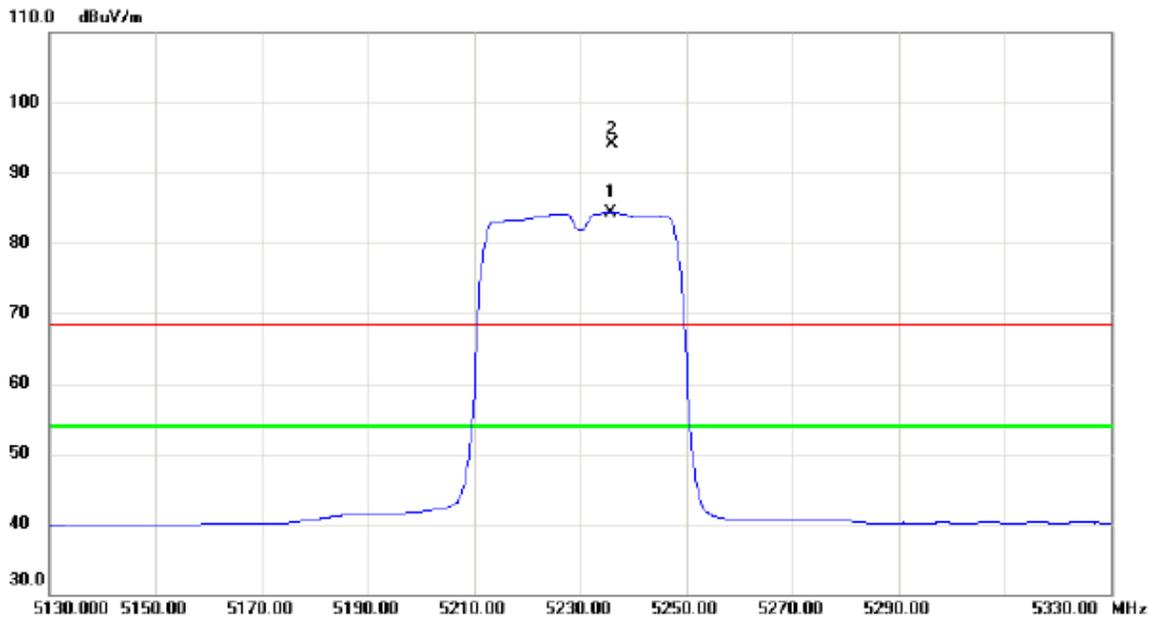


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5235.600	43.89	40.40	84.29	54.00	30.29	AVG	No Limit
2	X	5236.000	53.68	40.40	94.08	68.30	25.78	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

### Horizontal

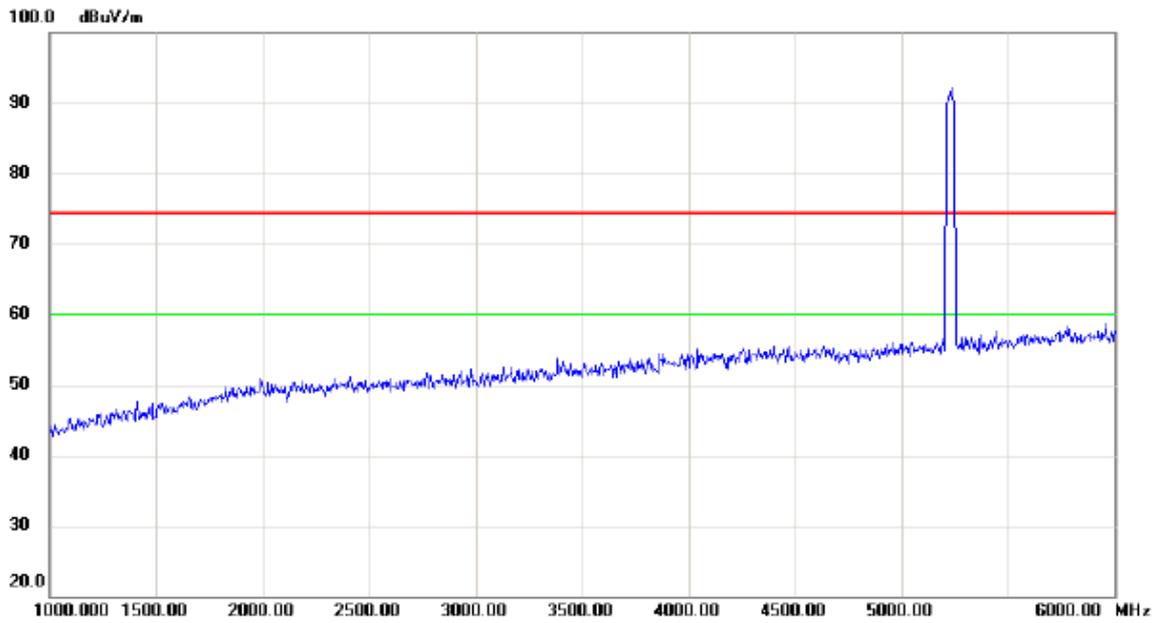


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

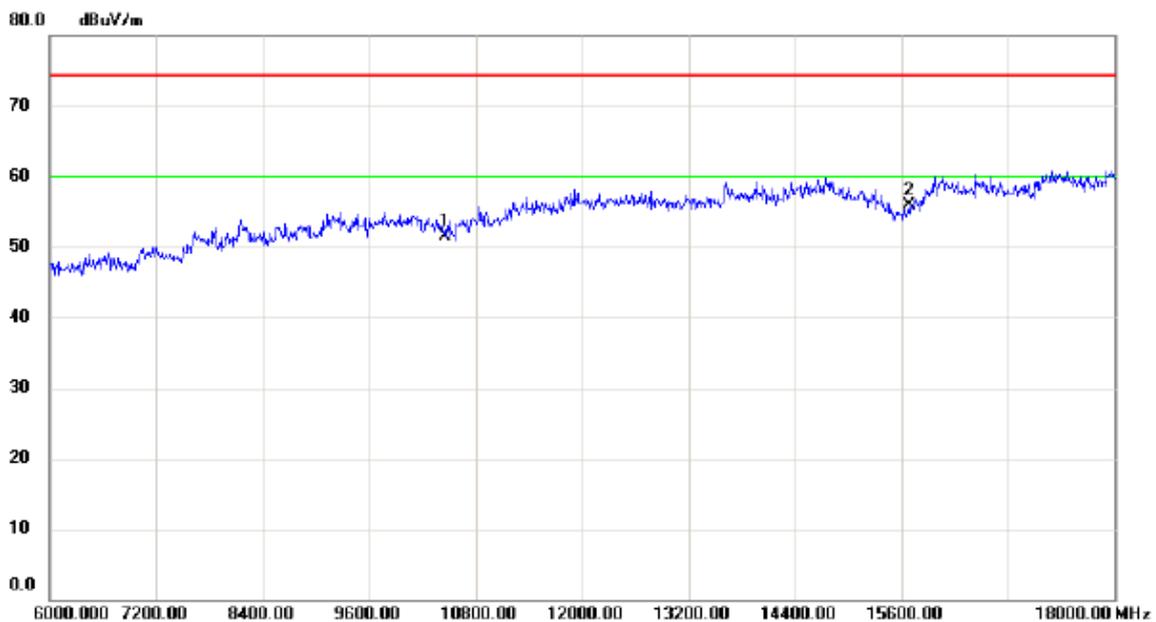


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10460.00	37.72	13.71	51.43	74.30	-22.87	peak	
2	*	15690.00	38.18	17.63	55.81	74.30	-18.49	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

### Horizontal

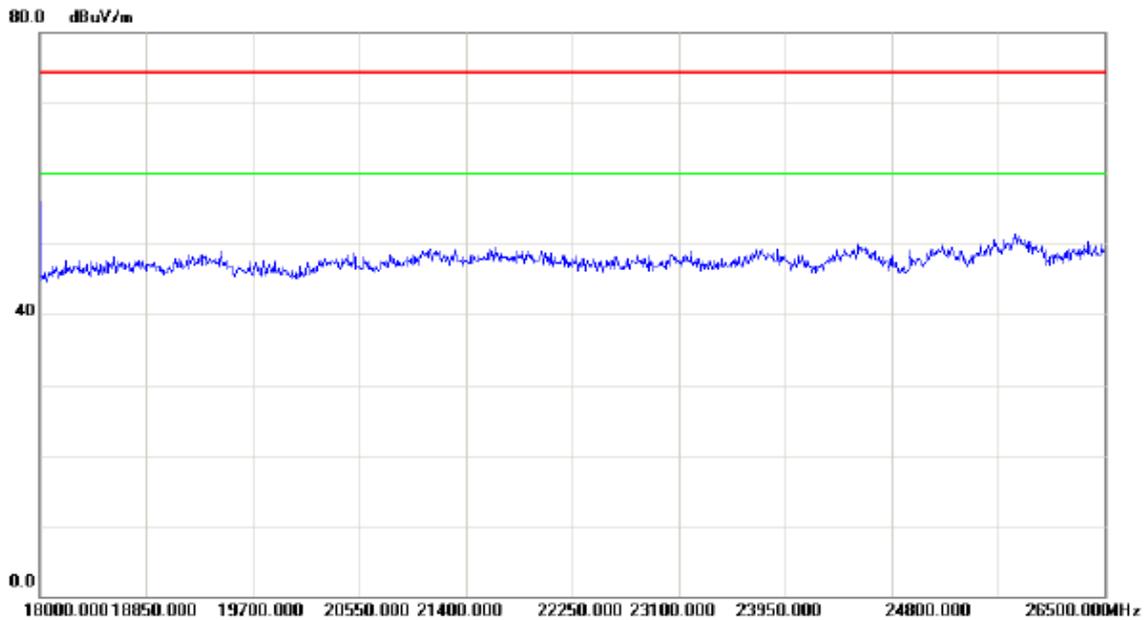


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

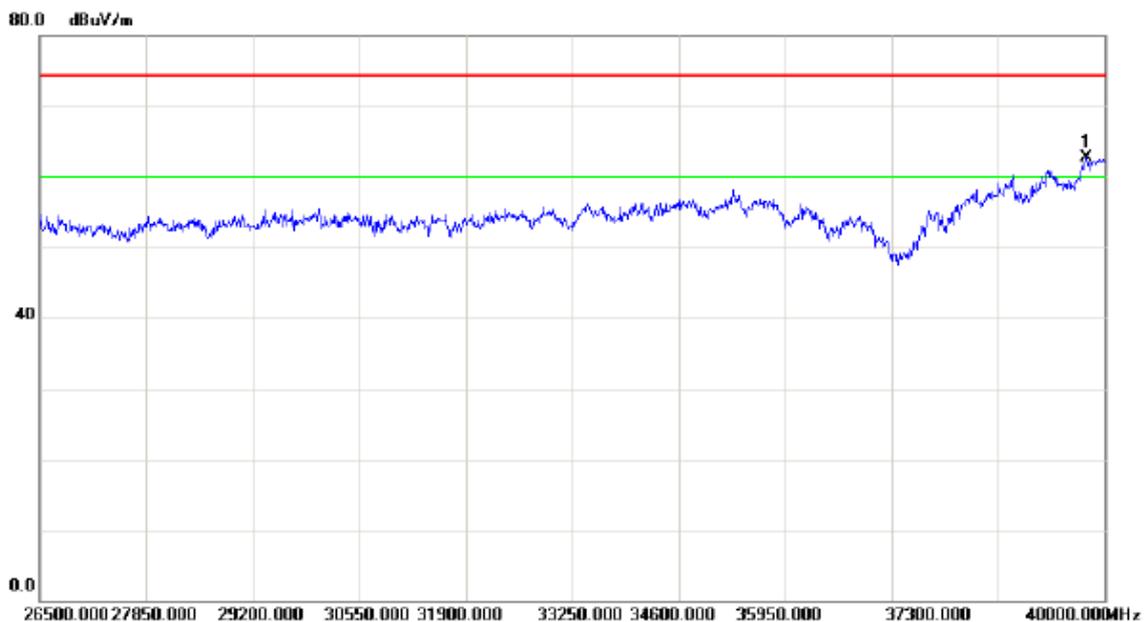

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39770.50	45.58	17.03	62.61	74.30	-11.69	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


### Vertical

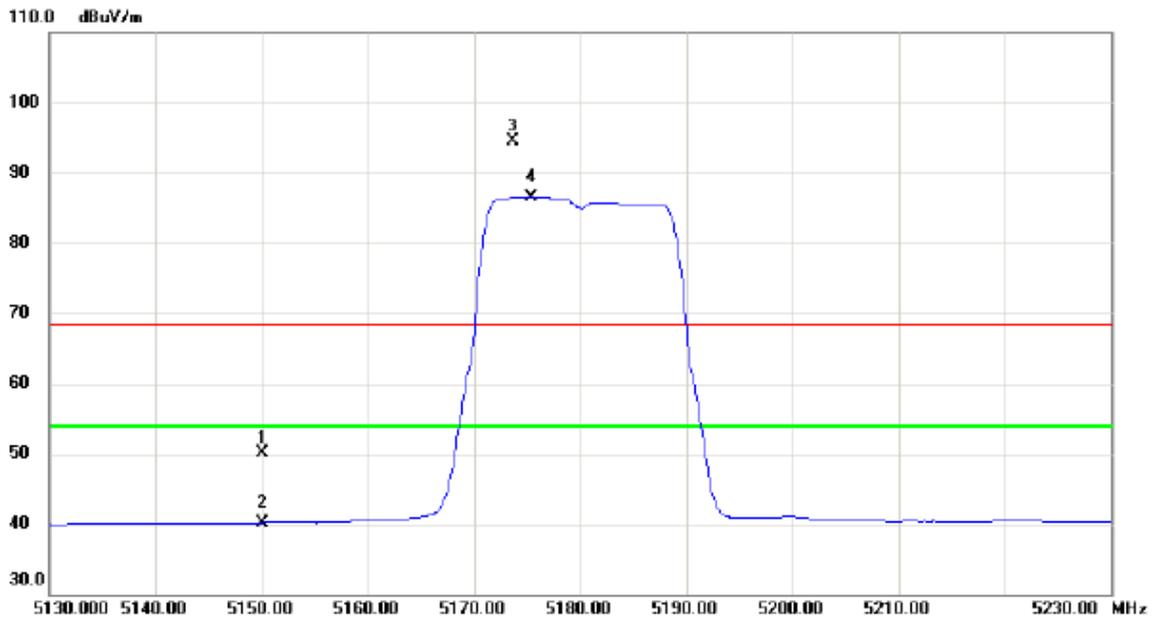


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	9.87	40.22	50.09	68.30	-18.21	peak	
2		5150.000	-0.03	40.22	40.19	54.00	-13.81	AVG	
3	X	5173.700	54.30	40.27	94.57	68.30	26.27	peak	No Limit
4	*	5175.400	46.18	40.27	86.45	54.00	32.45	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

### Vertical

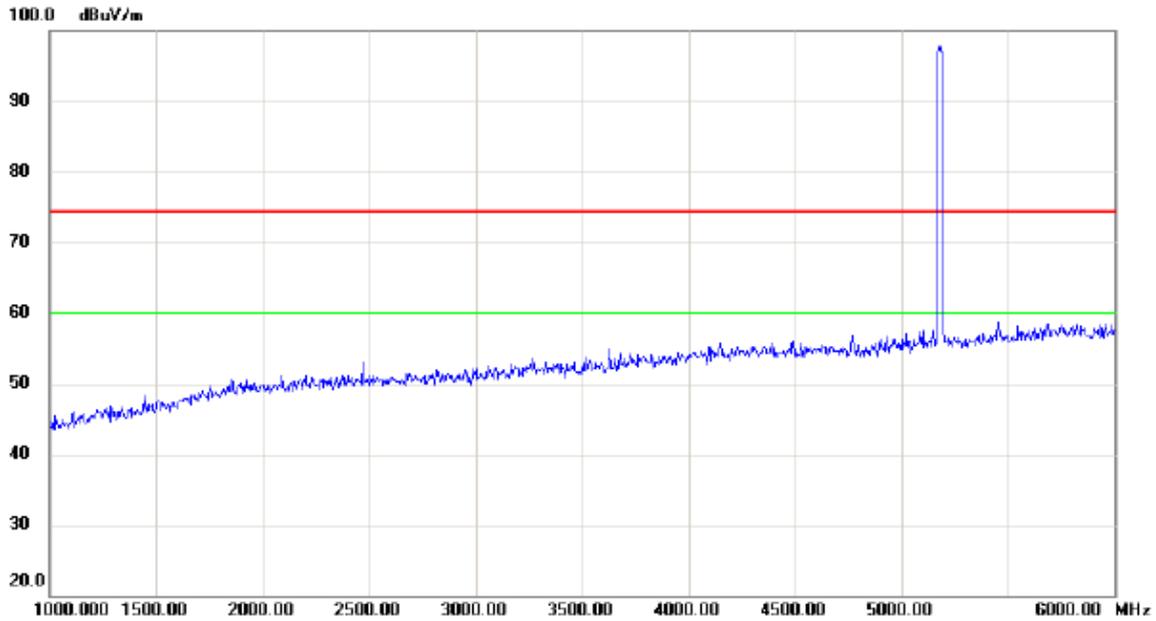


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

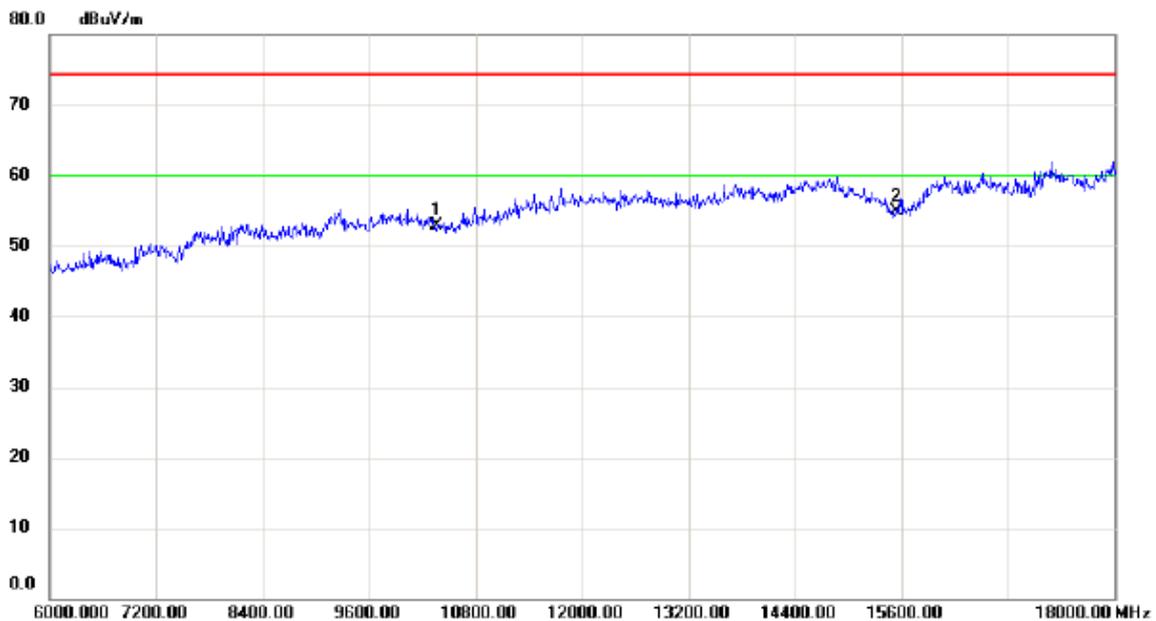


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10360.00	39.10	13.85	52.95	74.30	-21.35	peak	
2	*	15540.00	38.07	16.85	54.92	74.30	-19.38	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

### Vertical

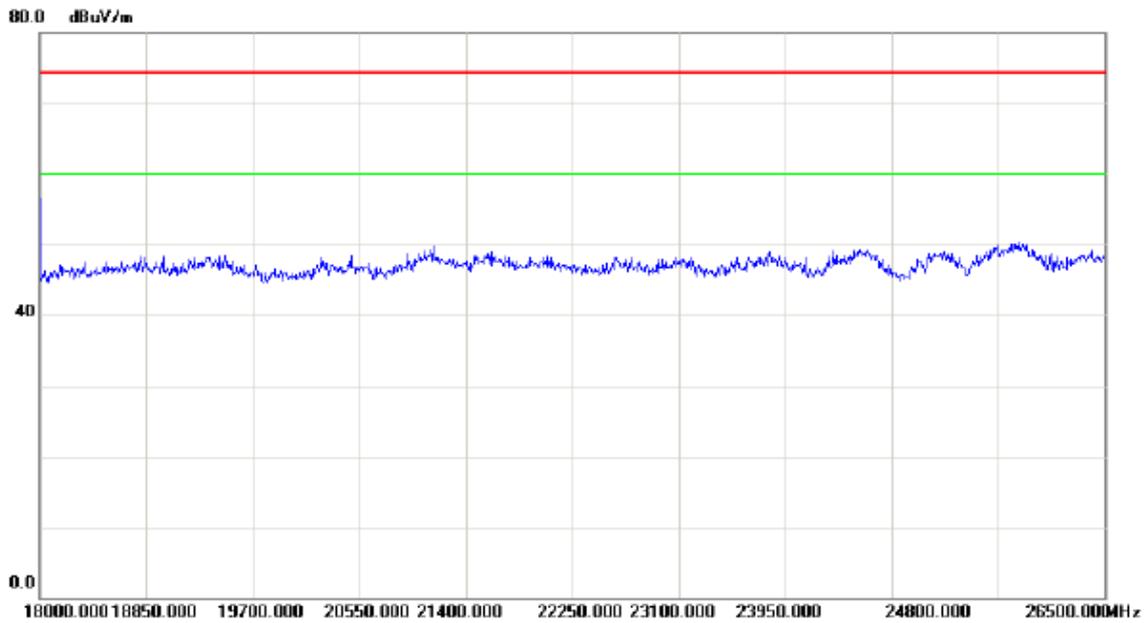


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

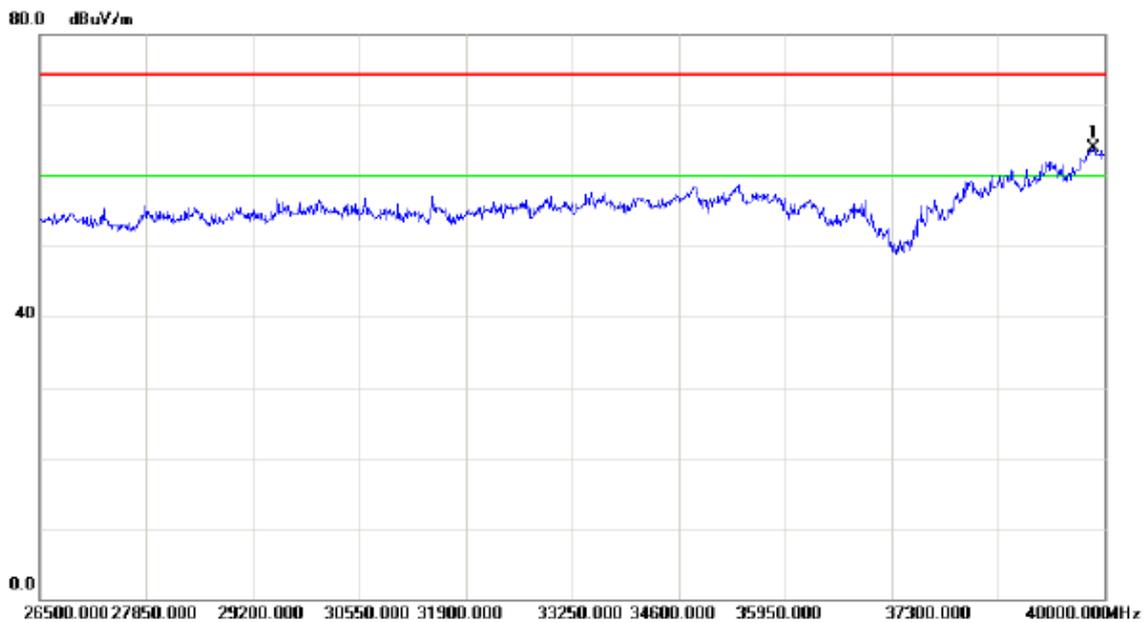

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39865.00	46.69	17.28	63.97	74.30	-10.33	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


### Horizontal

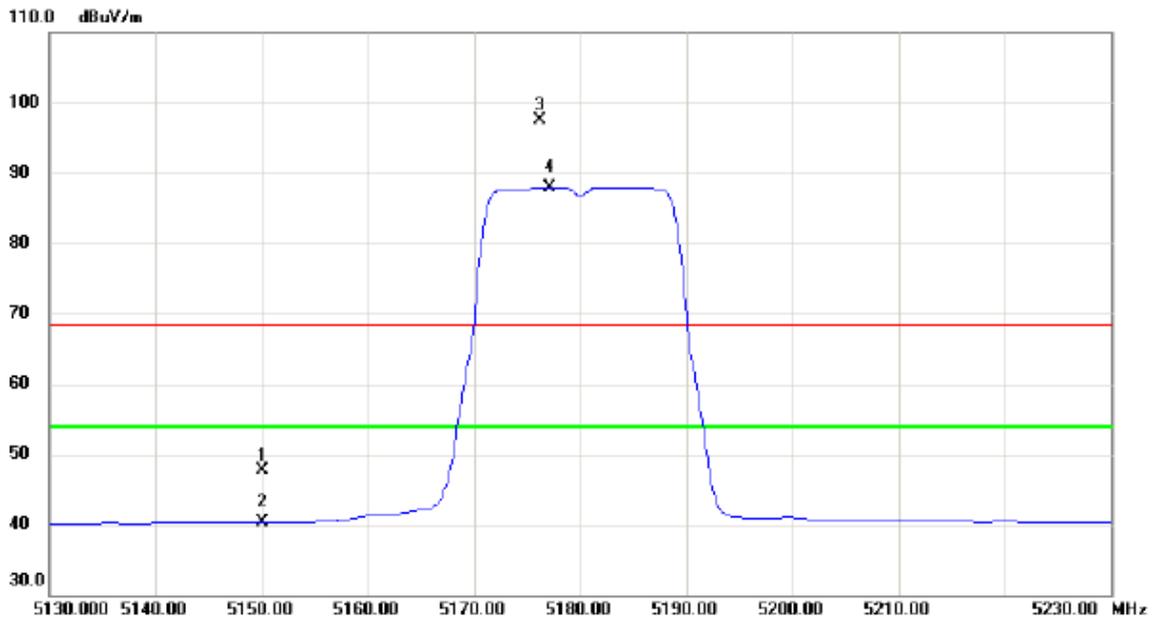


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5150.000	7.51	40.22	47.73	68.30	-20.57	peak	
2		5150.000	0.10	40.22	40.32	54.00	-13.68	AVG	
3	X	5176.200	57.18	40.27	97.45	68.30	29.15	peak	No Limit
4	*	5177.100	47.66	40.28	87.94	54.00	33.94	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

### Horizontal

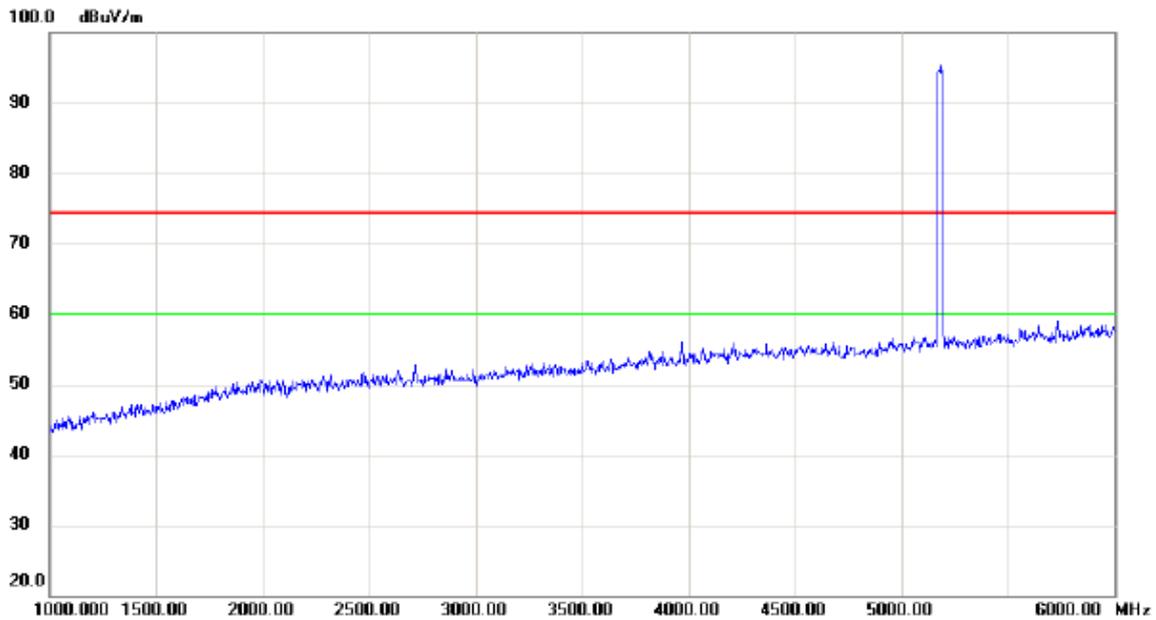


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

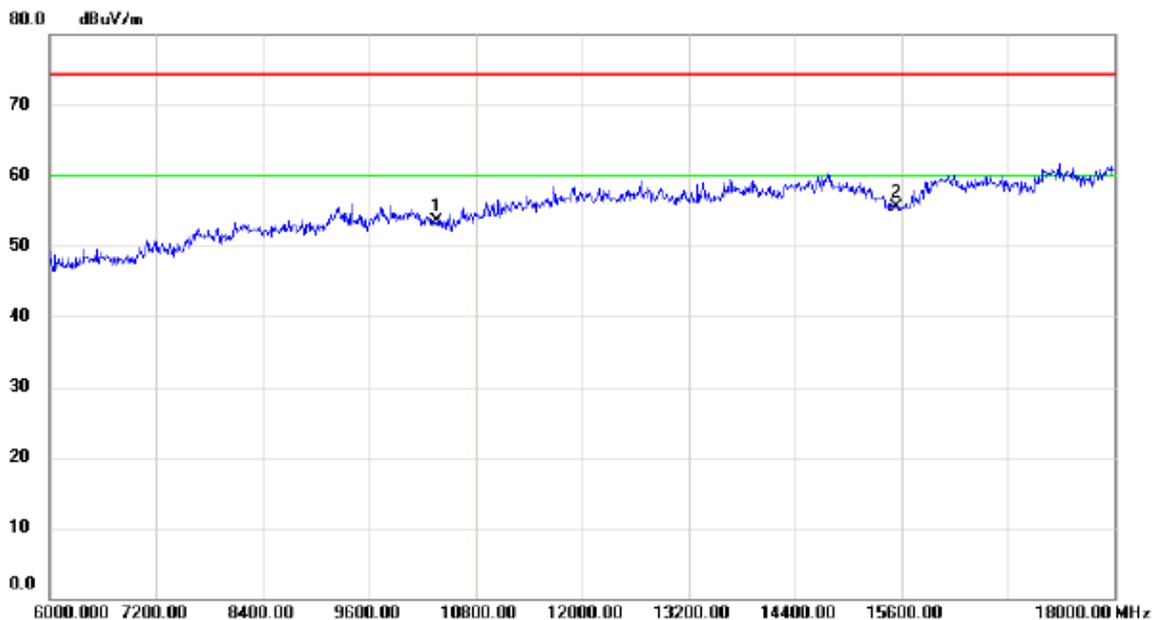


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	10360.00	39.58	13.85	53.43	74.30	-20.87	peak	
2 *	15540.00	38.58	16.85	55.43	74.30	-18.87	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

### Horizontal

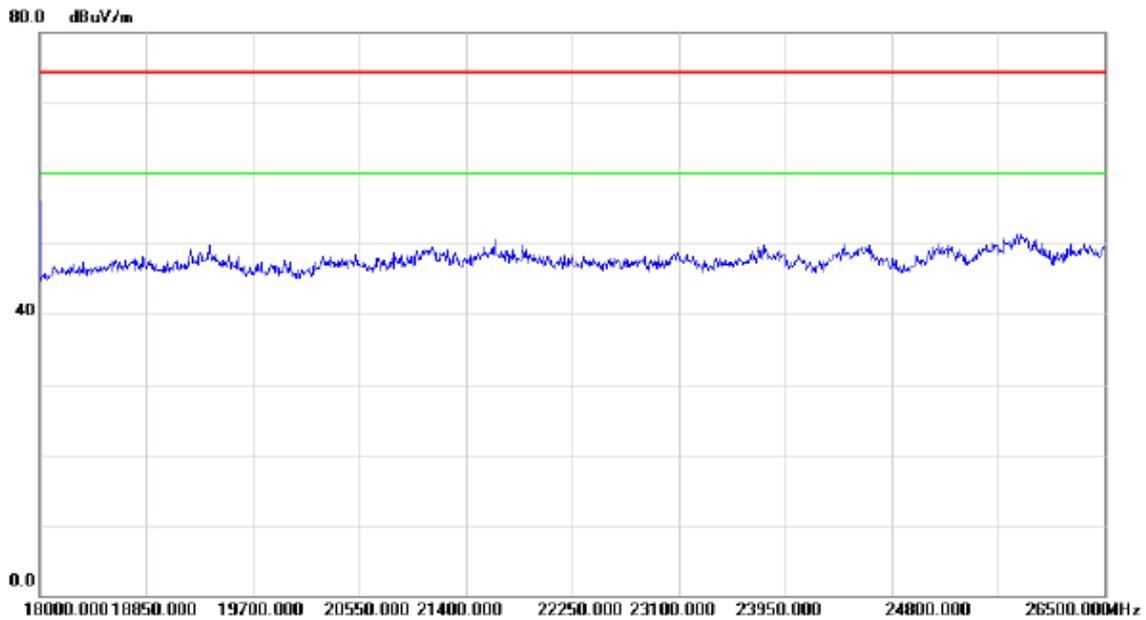


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

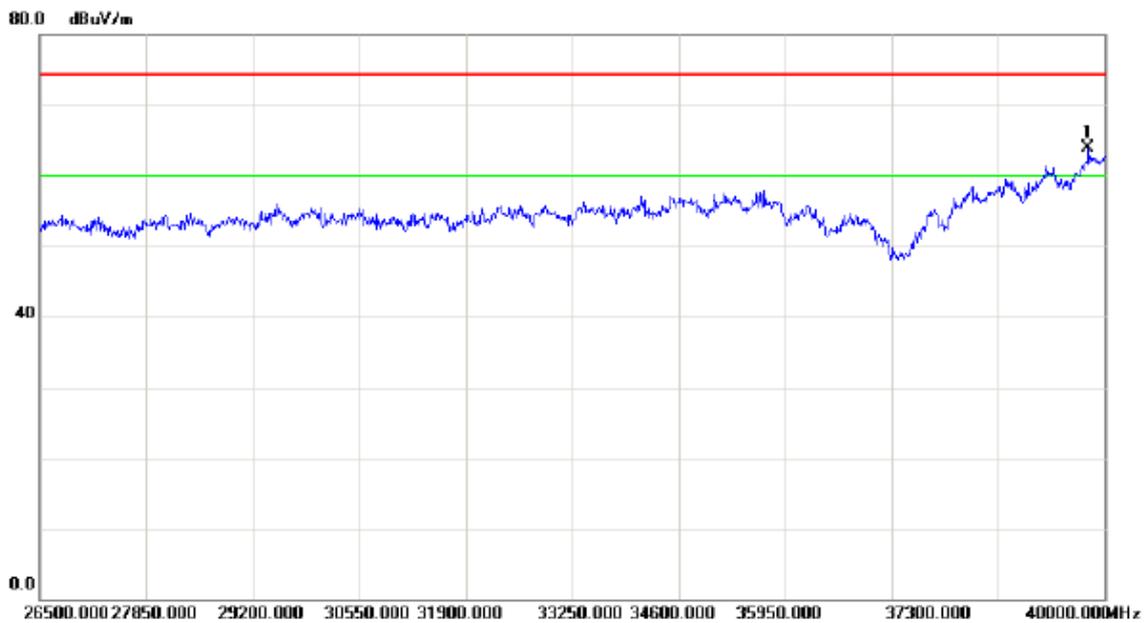

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39797.50	46.71	17.11	63.82	74.30	-10.48	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


### Vertical

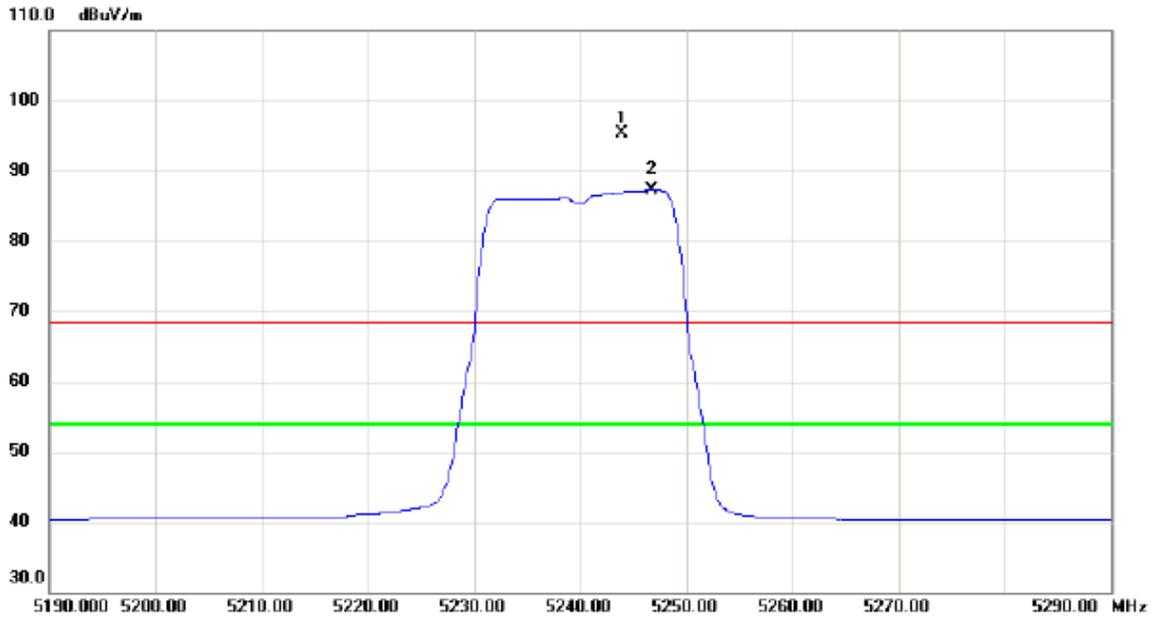


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5243.900	54.97	40.42	95.39	68.30	27.09	peak	No Limit
2	*	5246.700	46.82	40.42	87.24	54.00	33.24	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

### Vertical

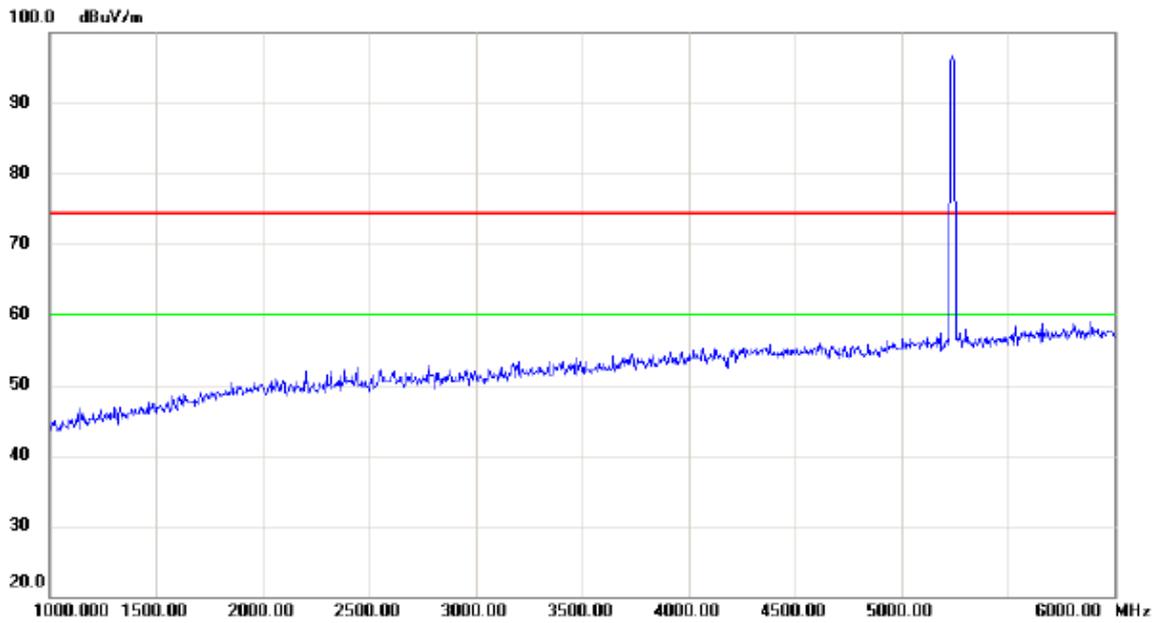


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

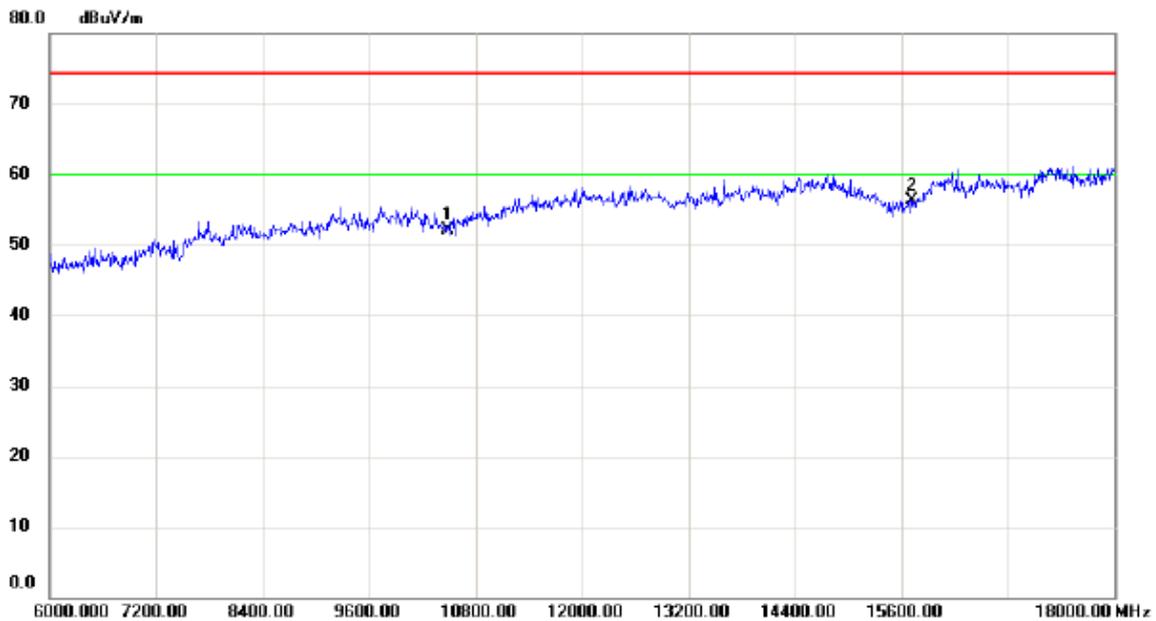


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10480.00	38.51	13.69	52.20	74.30	-22.10	peak	
2	*	15720.00	38.46	17.78	56.24	74.30	-18.06	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

### Vertical

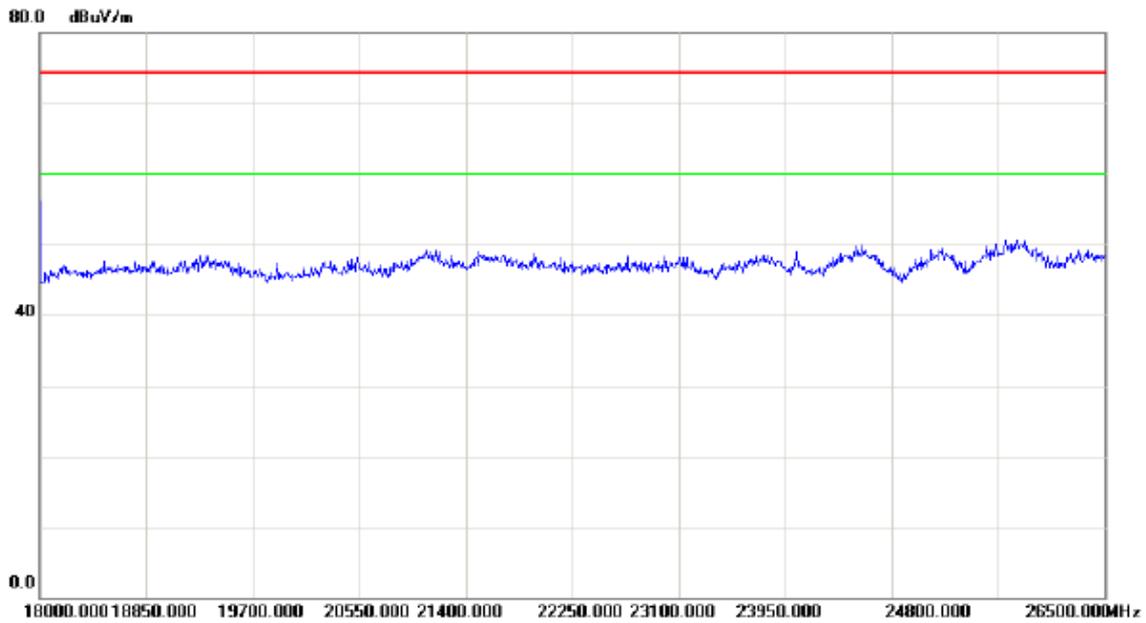


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

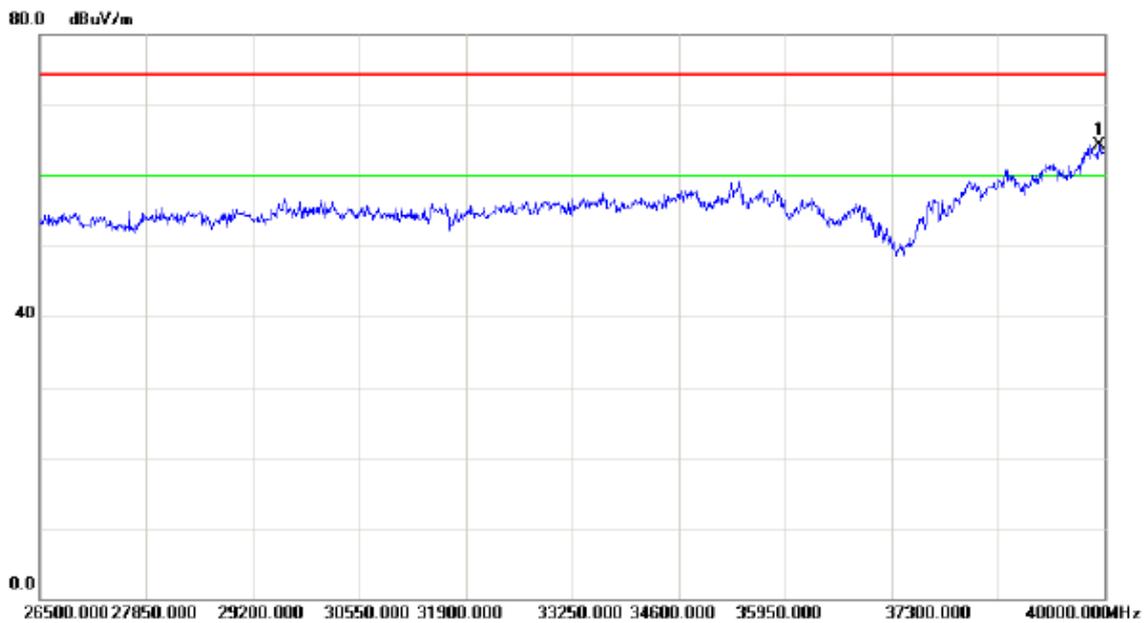

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39932.50	46.96	17.43	64.39	74.30	-9.91	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


### Horizontal

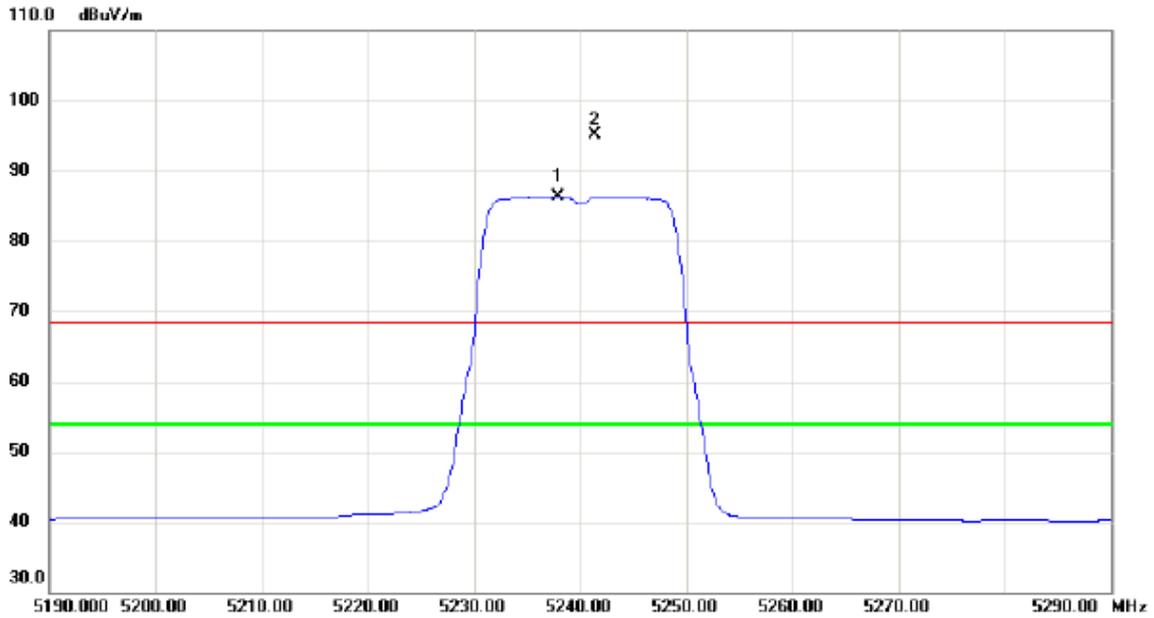


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5237.900	45.98	40.40	86.38	54.00	32.38	AVG	No Limit
2	X	5241.400	54.68	40.41	95.09	68.30	26.79	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

### Horizontal

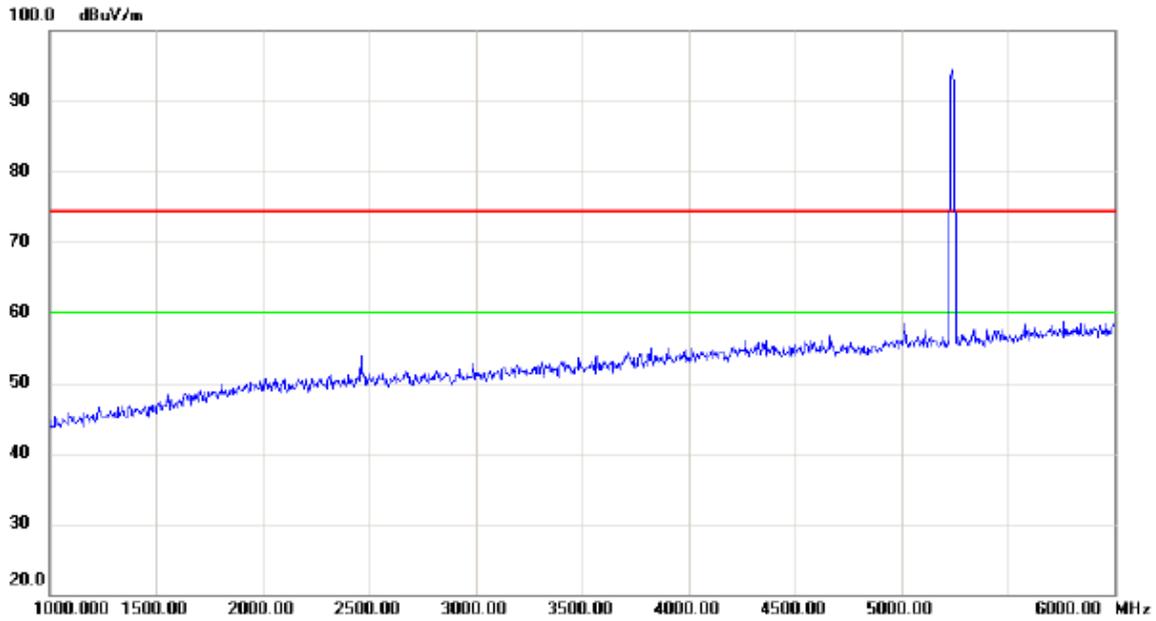


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

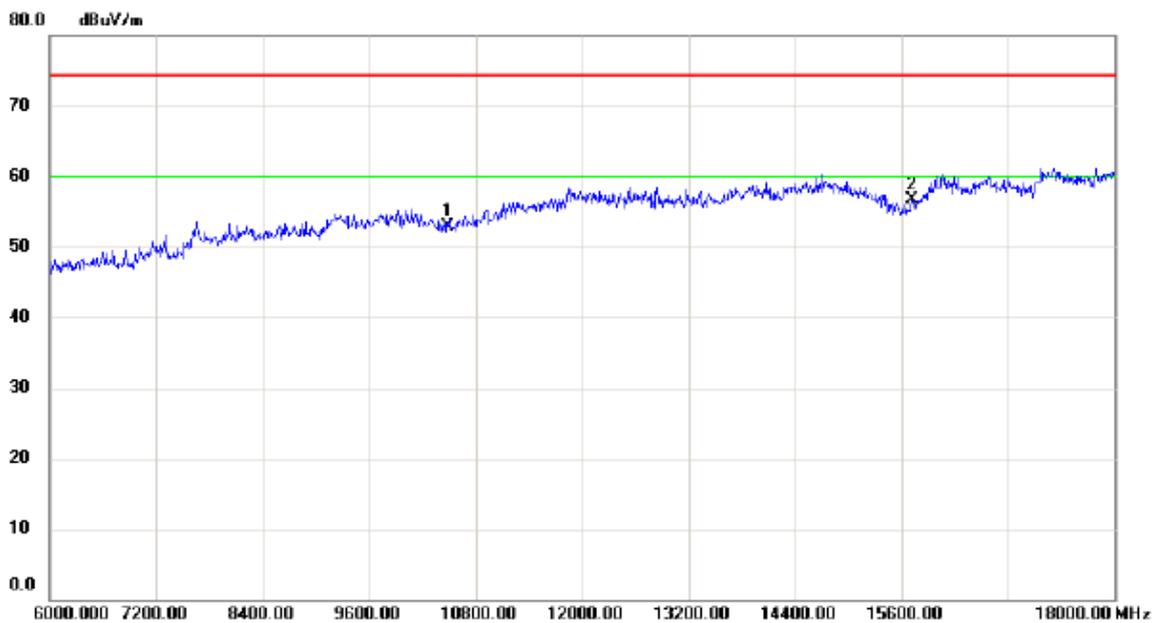


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10480.00	39.19	13.69	52.88	74.30	-21.42	peak	
2	*	15720.00	38.90	17.78	56.68	74.30	-17.62	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

### Horizontal

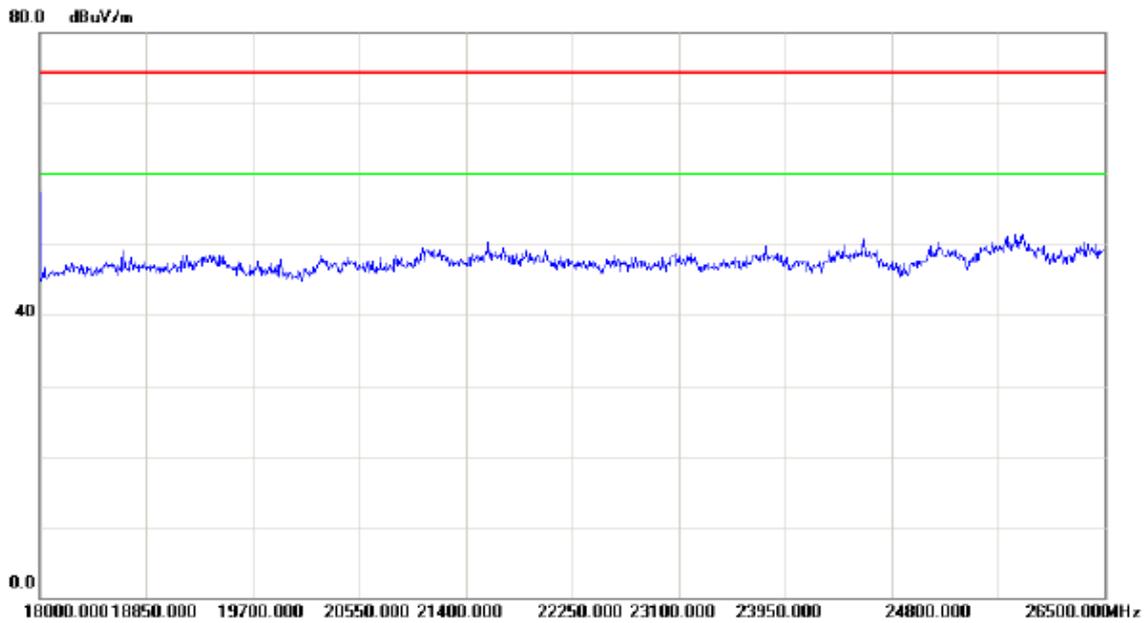


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

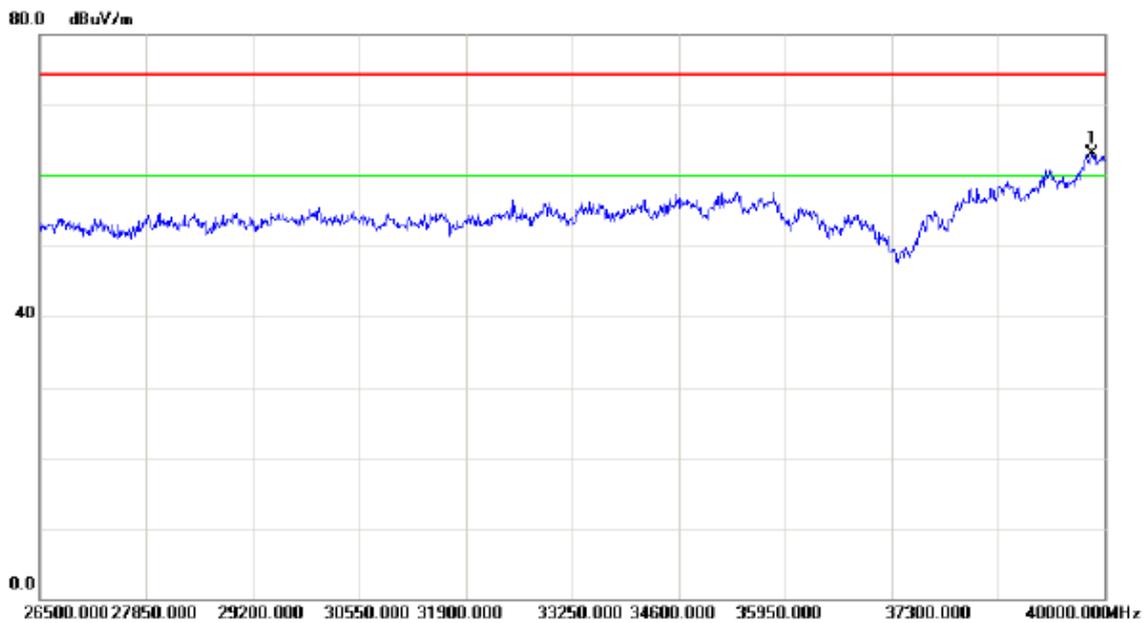

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39851.50	45.92	17.23	63.15	74.30	-11.15	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


### Vertical

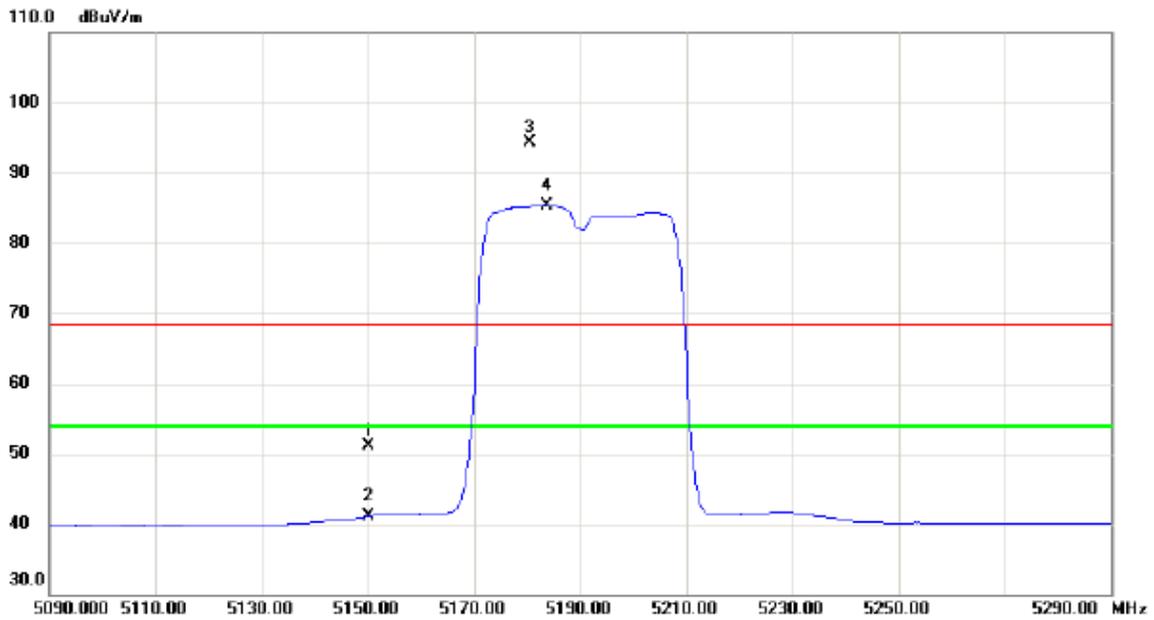


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5150.000	10.83	40.22	51.05	68.30	-17.25	peak	
2		5150.000	0.84	40.22	41.06	54.00	-12.94	AVG	
3	X	5180.600	54.11	40.28	94.39	68.30	26.09	peak	No Limit
4	*	5183.800	45.11	40.29	85.40	54.00	31.40	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

### Vertical

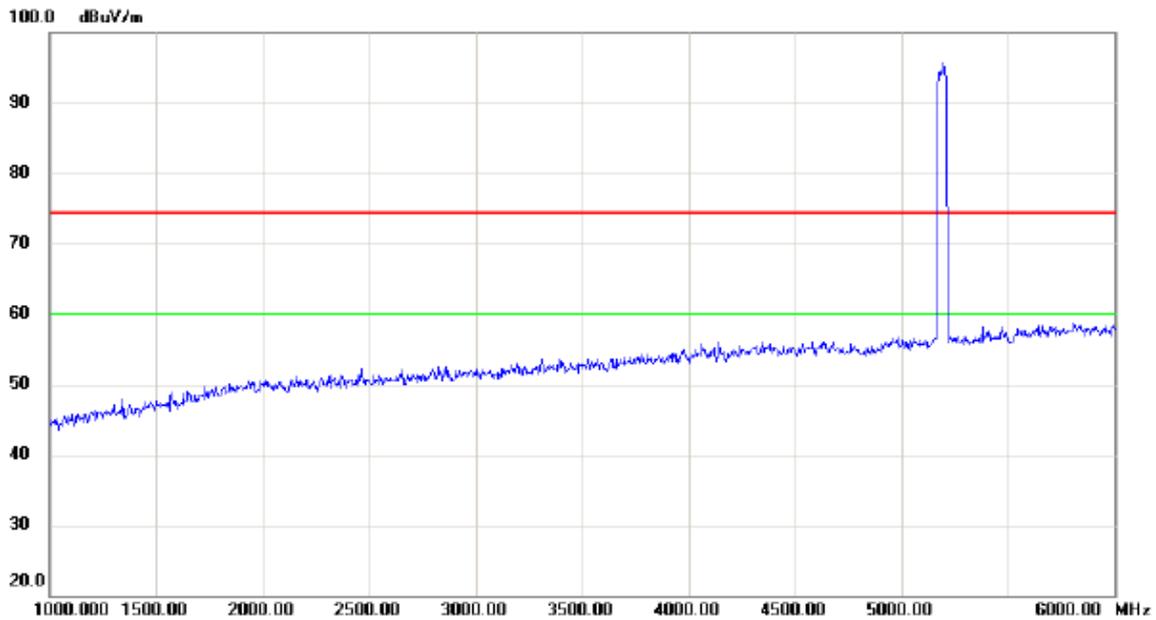


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

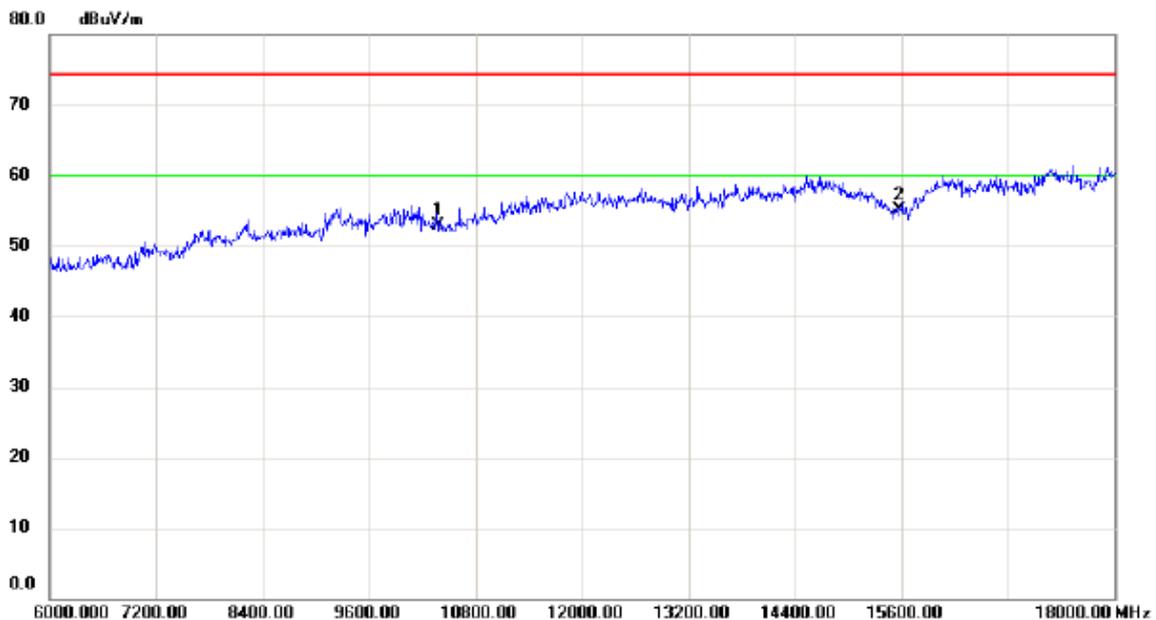


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	10380.00	39.17	13.83	53.00	74.30	-21.30	peak	
2 *	15570.00	38.01	17.00	55.01	74.30	-19.29	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

### Vertical

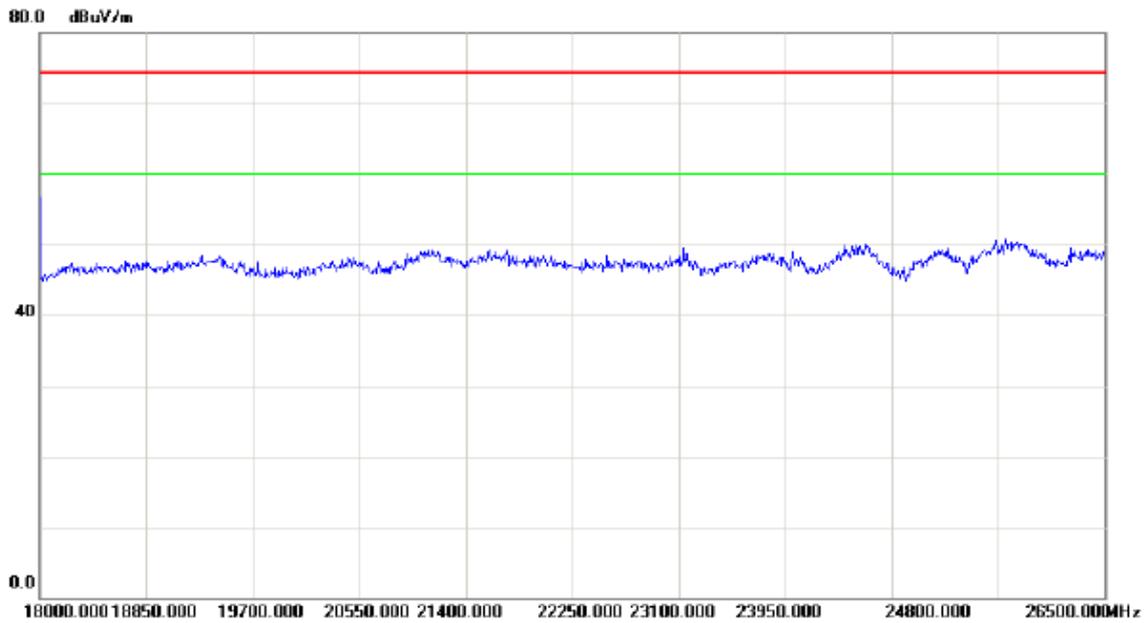


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

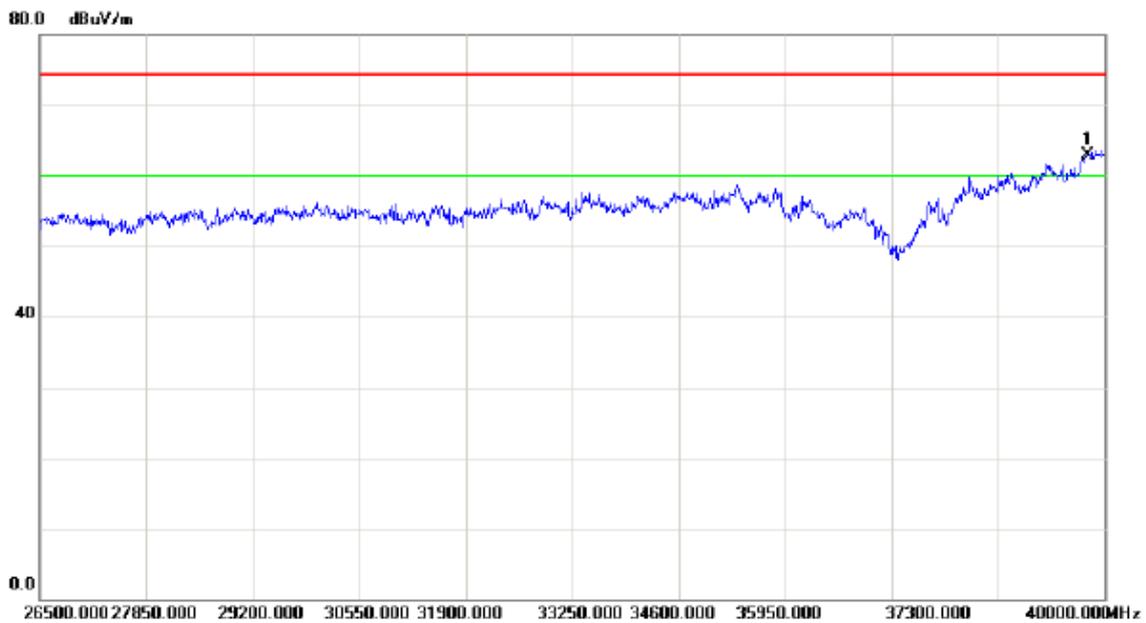

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39784.00	45.75	17.07	62.82	74.30	-11.48	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


### Horizontal

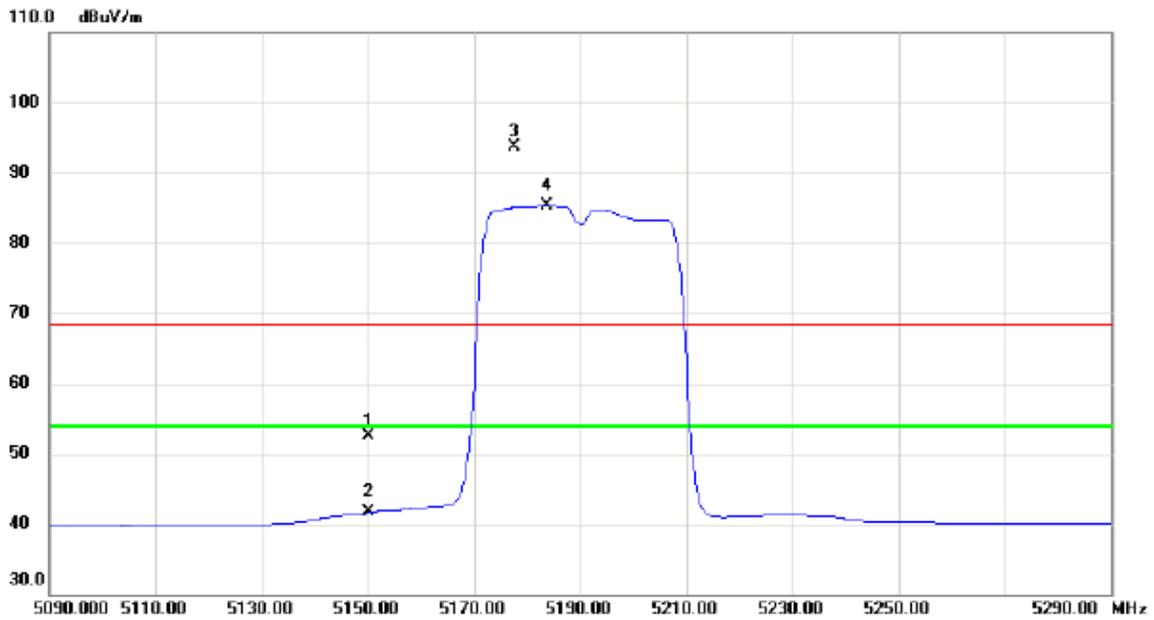


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5150.000	12.33	40.22	52.55	68.30	-15.75	peak	
2		5150.000	1.42	40.22	41.64	54.00	-12.36	AVG	
3	X	5177.600	53.49	40.28	93.77	68.30	25.47	peak	No Limit
4	*	5183.800	44.98	40.29	85.27	54.00	31.27	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

### Horizontal

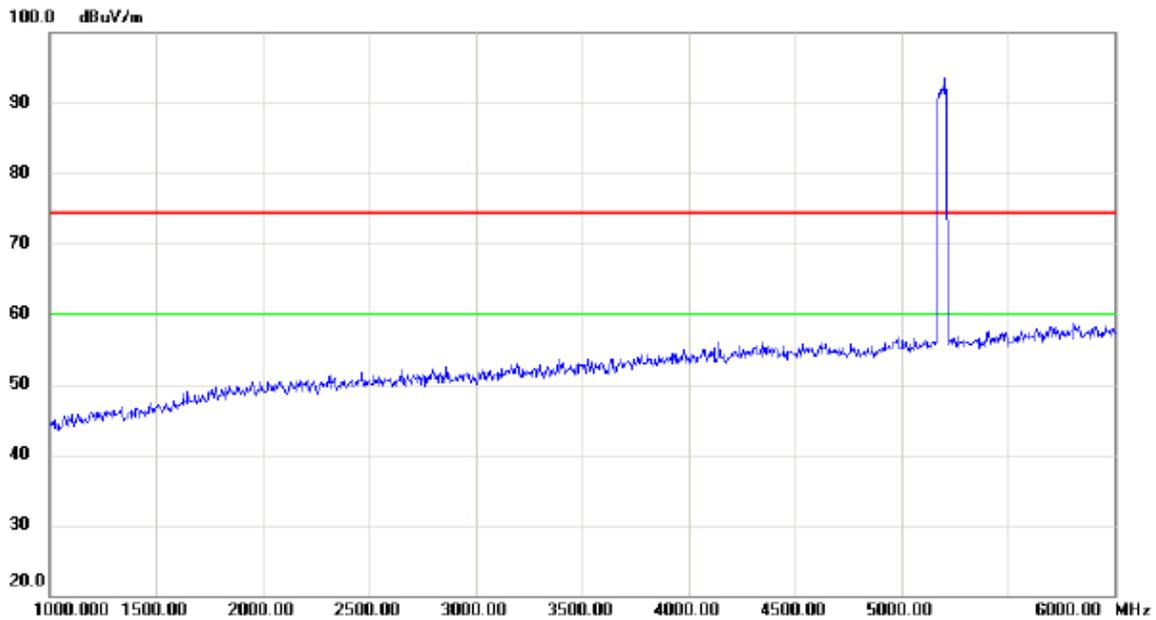


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

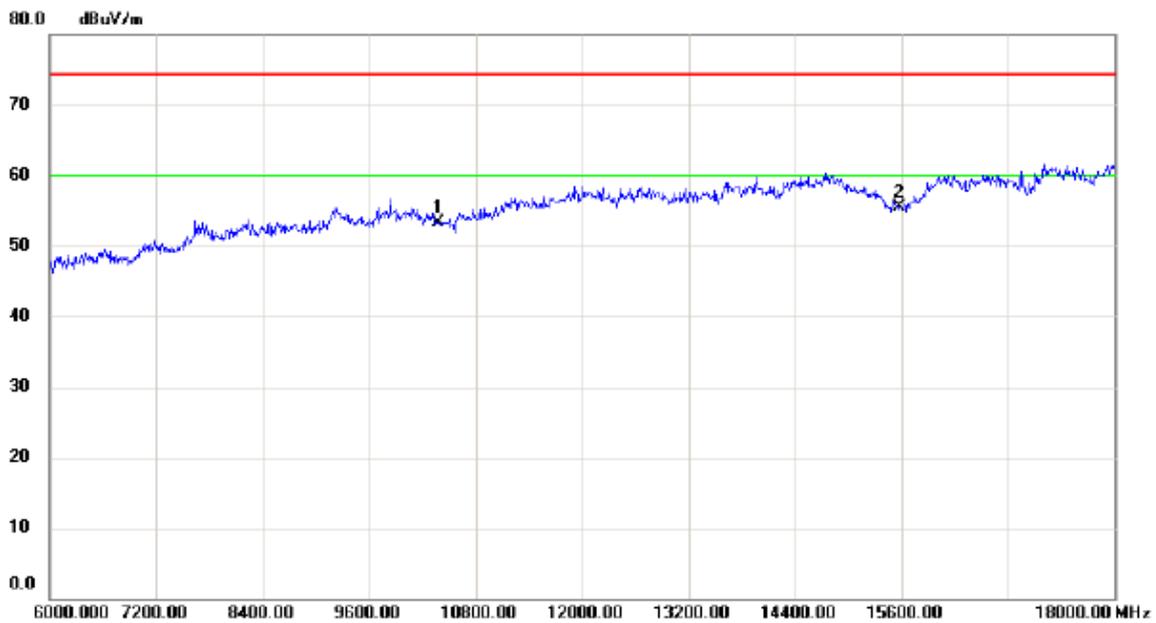


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	10380.00	39.47	13.83	53.30	74.30	-21.00	peak	
2 *	15570.00	38.43	17.00	55.43	74.30	-18.87	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

### Horizontal

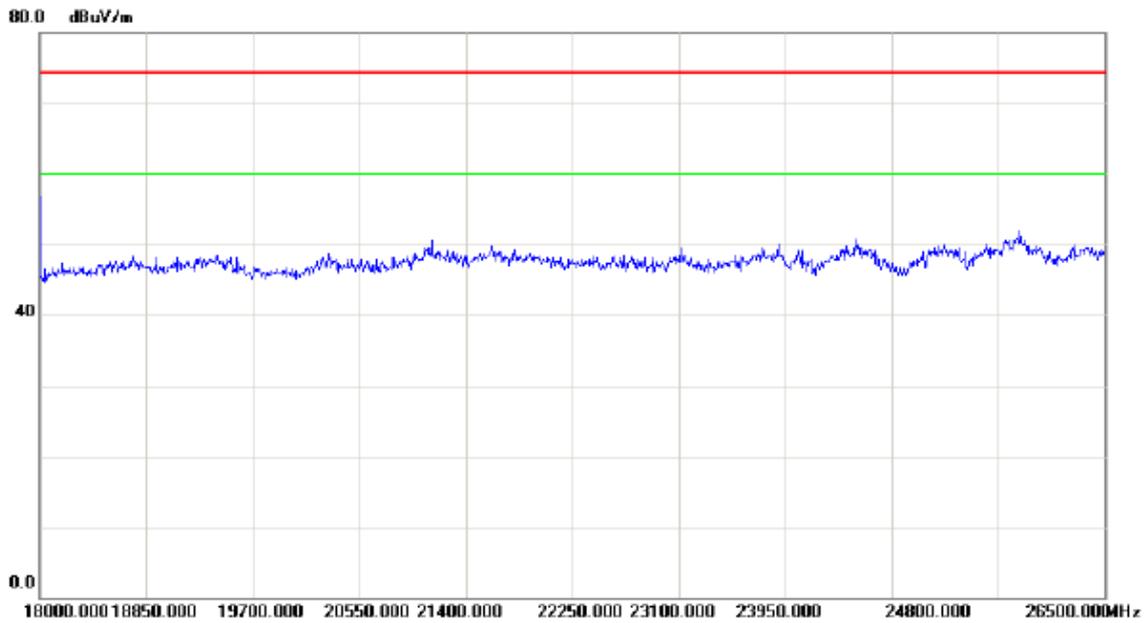


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

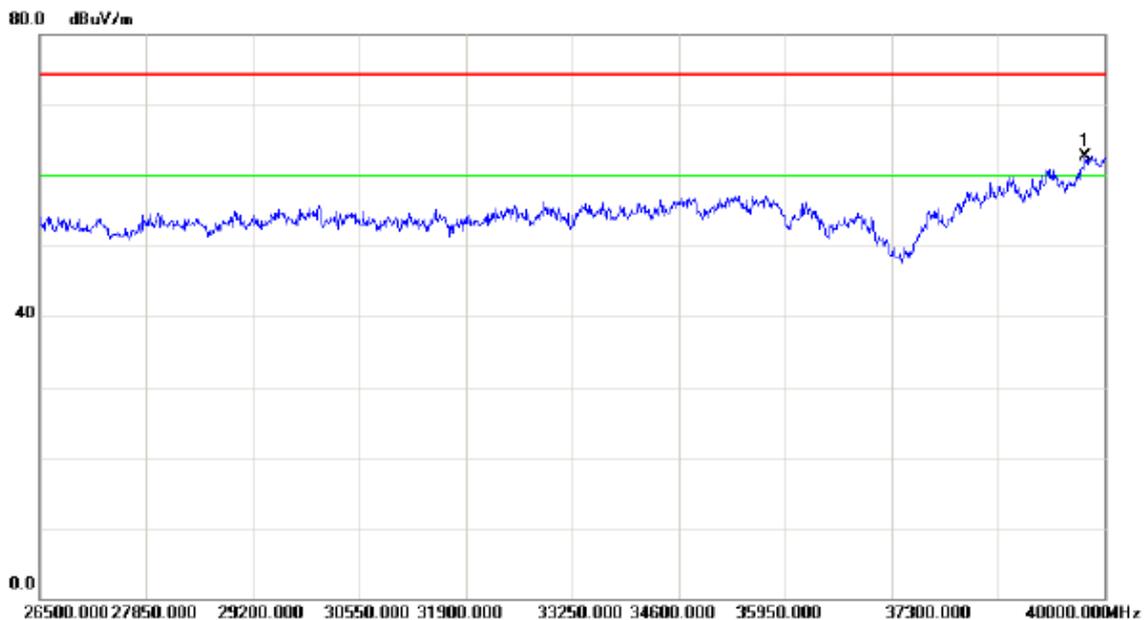

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39757.00	45.62	17.00	62.62	74.30	-11.68	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


### Vertical

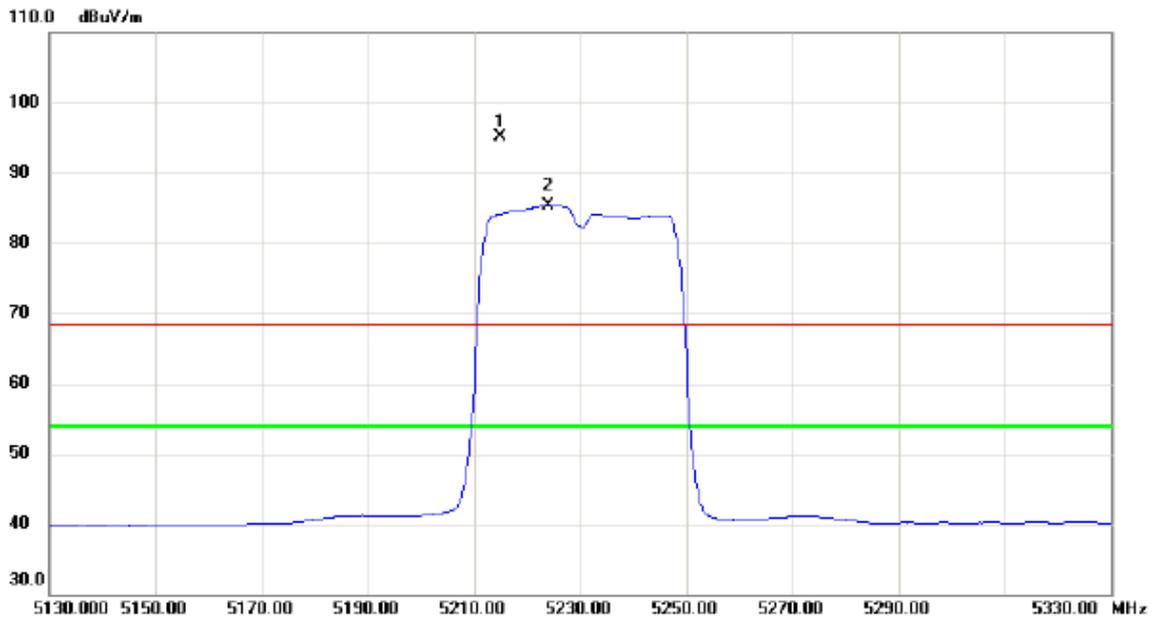


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5214.800	54.83	40.36	95.19	68.30	26.89	peak	No Limit
2	*	5224.000	44.95	40.38	85.33	54.00	31.33	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

### Vertical

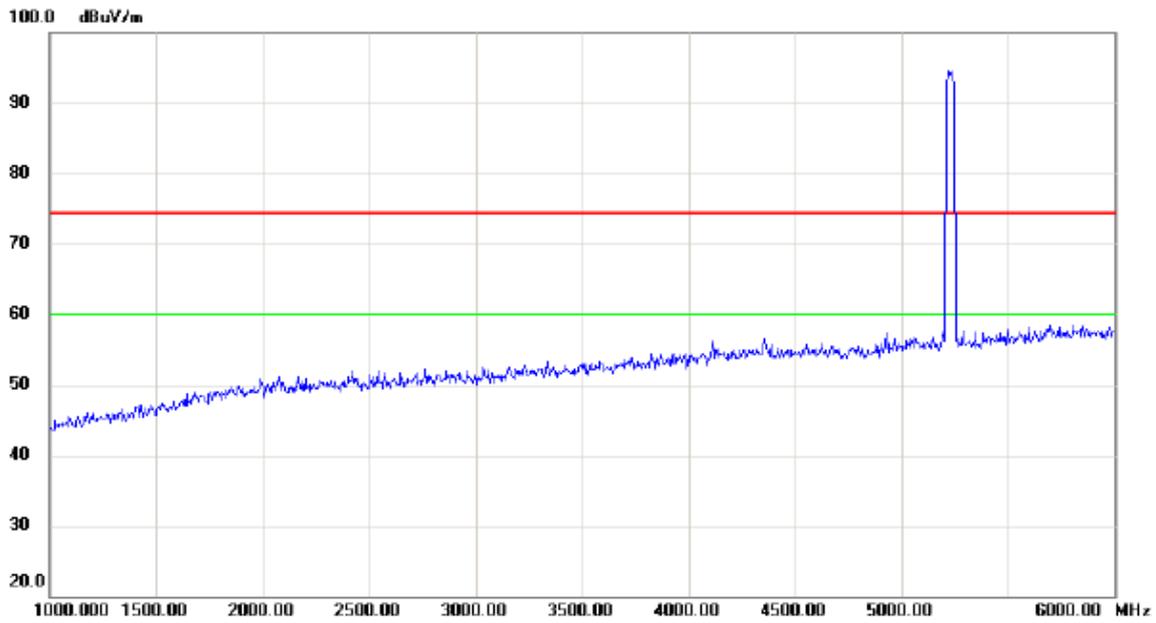


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

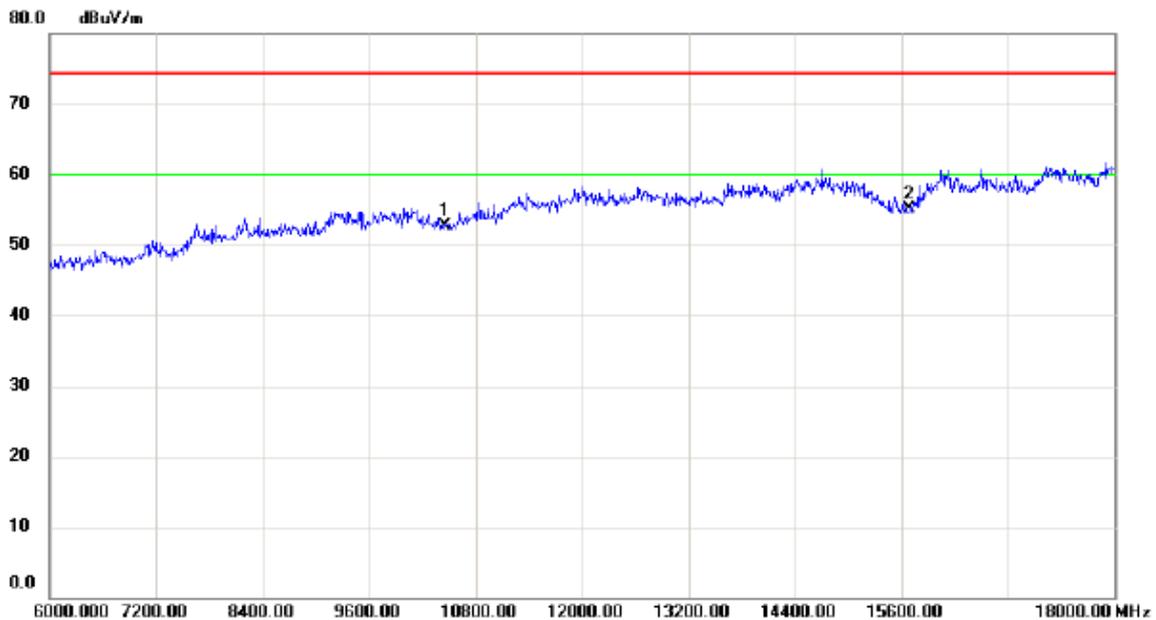


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10460.00	39.09	13.71	52.80	74.30	-21.50	peak	
2	*	15690.00	37.44	17.63	55.07	74.30	-19.23	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

### Vertical

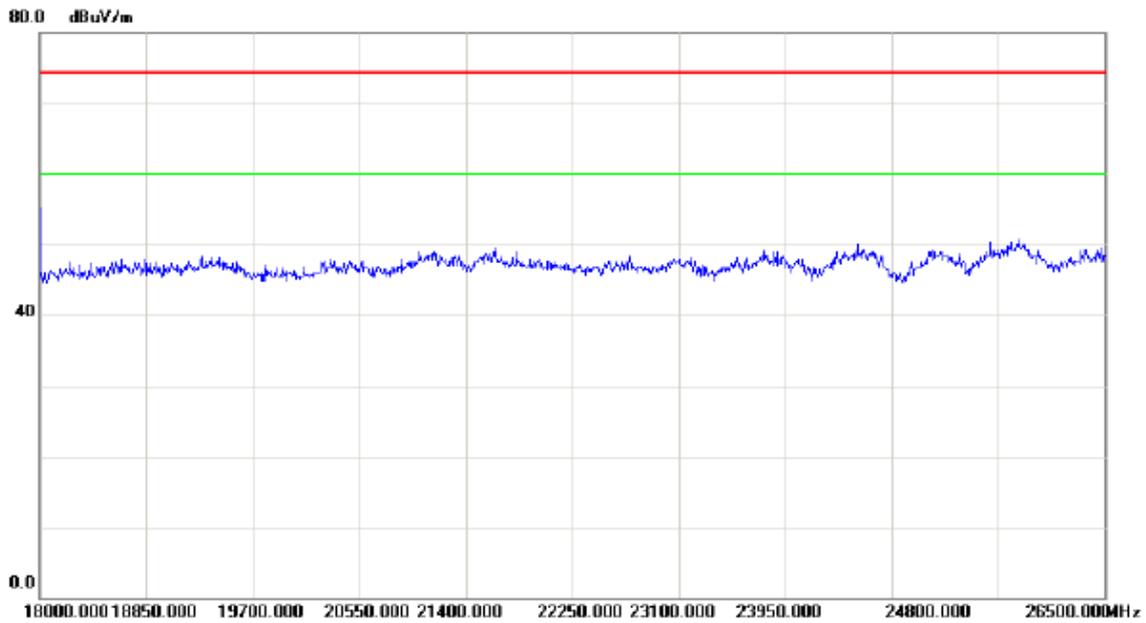


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

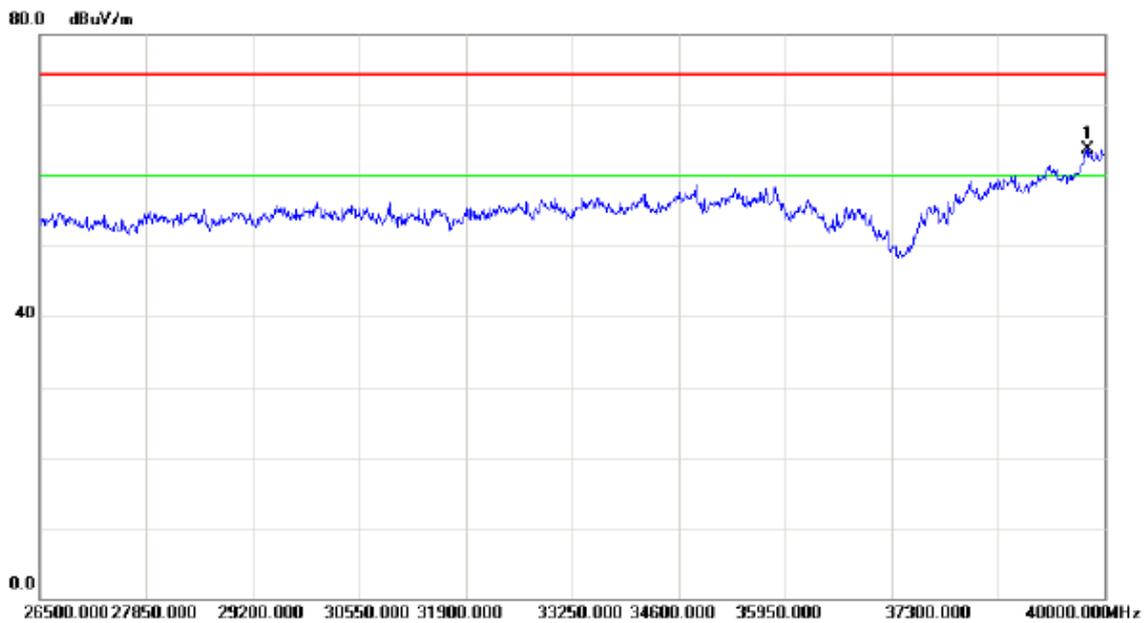

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39784.00	46.73	17.07	63.80	74.30	-10.50	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


### Horizontal

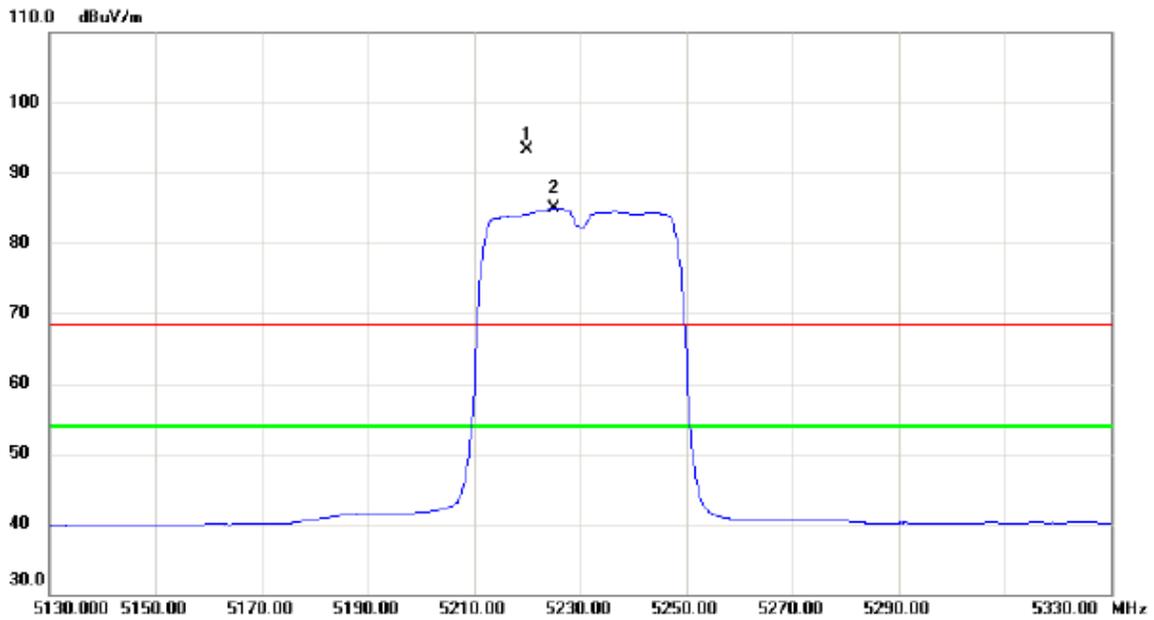


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5220.000	53.03	40.37	93.40	68.30	25.10	peak	No Limit
2	*	5225.200	44.50	40.38	84.88	54.00	30.88	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

### Horizontal

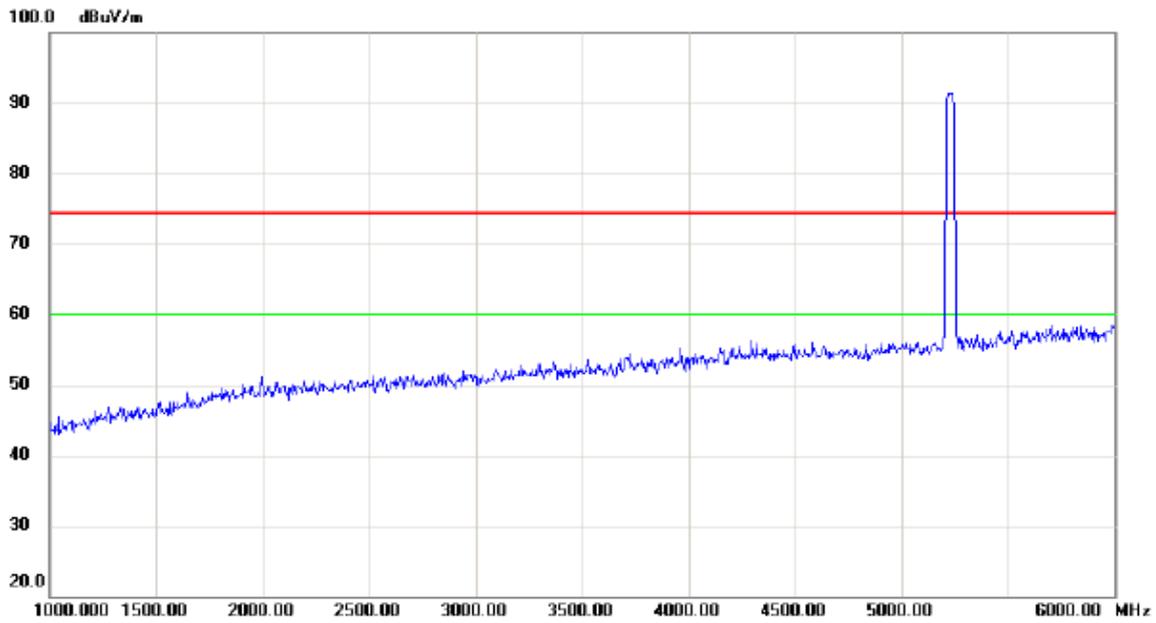


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

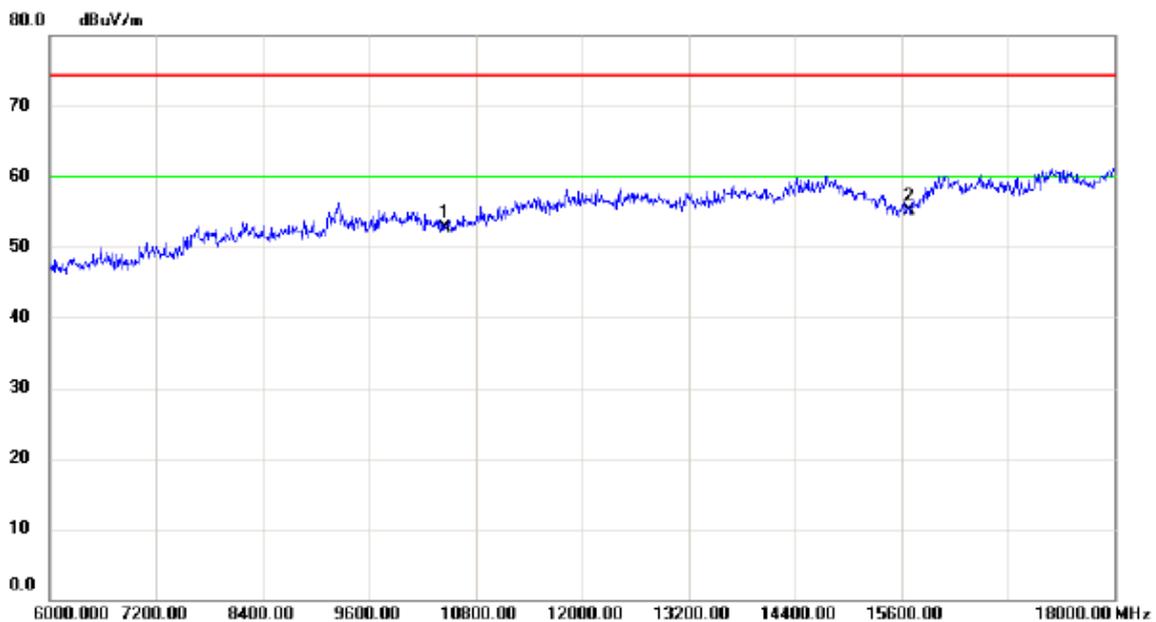


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10460.00	39.08	13.71	52.79	74.30	-21.51	peak	
2	*	15690.00	37.49	17.63	55.12	74.30	-19.18	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

### Horizontal

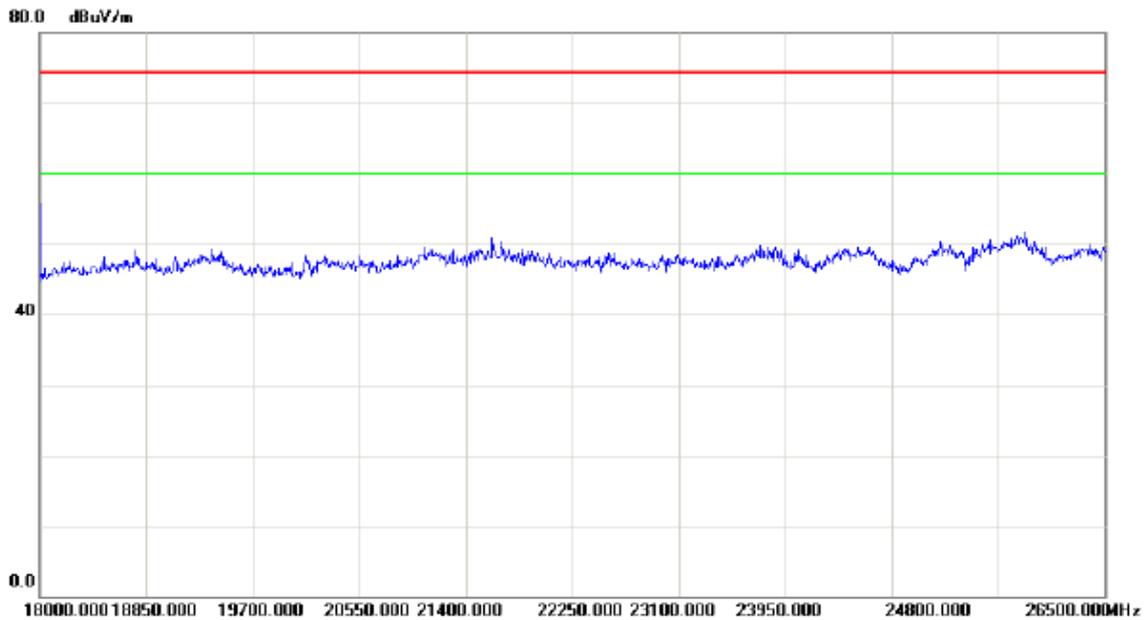


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

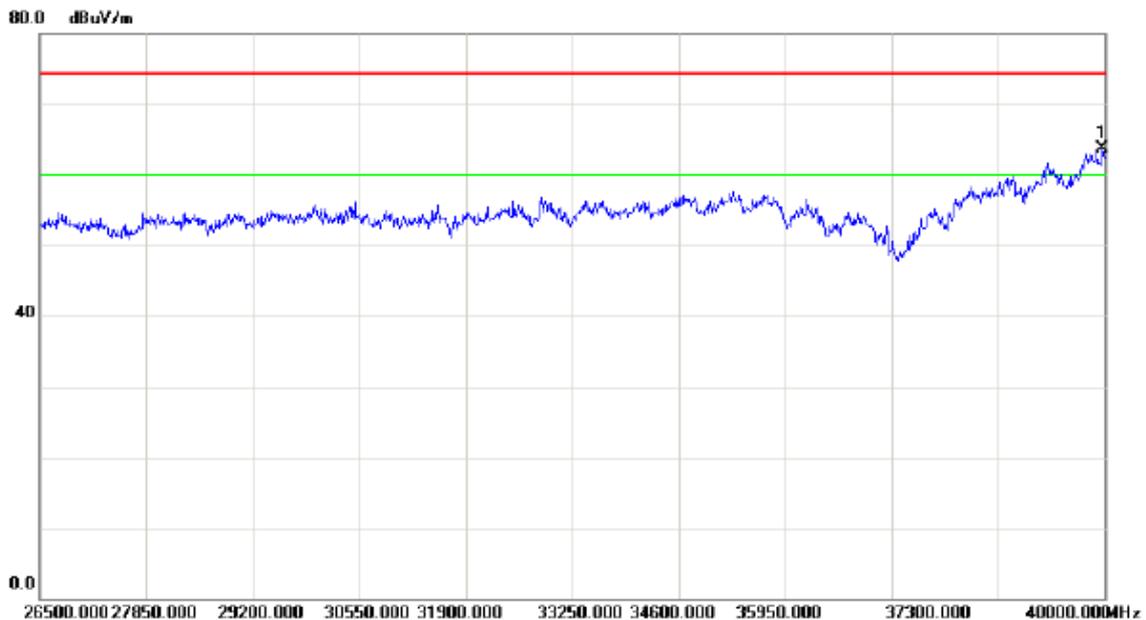

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39973.00	46.15	17.54	63.69	74.30	-10.61	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


**Vertical**

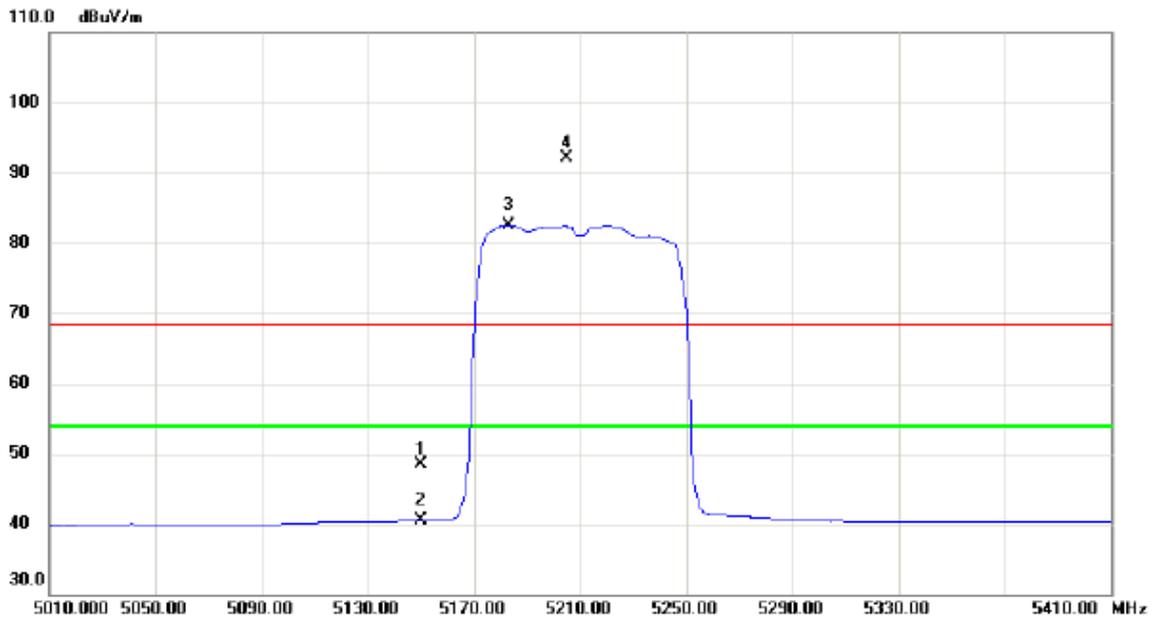


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5150.000	8.19	40.22	48.41	68.30	-19.89	peak	
2		5150.000	0.27	40.22	40.49	54.00	-13.51	AVG	
3	*	5183.200	42.27	40.29	82.56	54.00	28.56	AVG	No Limit
4	X	5204.800	51.72	40.33	92.05	68.30	23.75	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

### Vertical

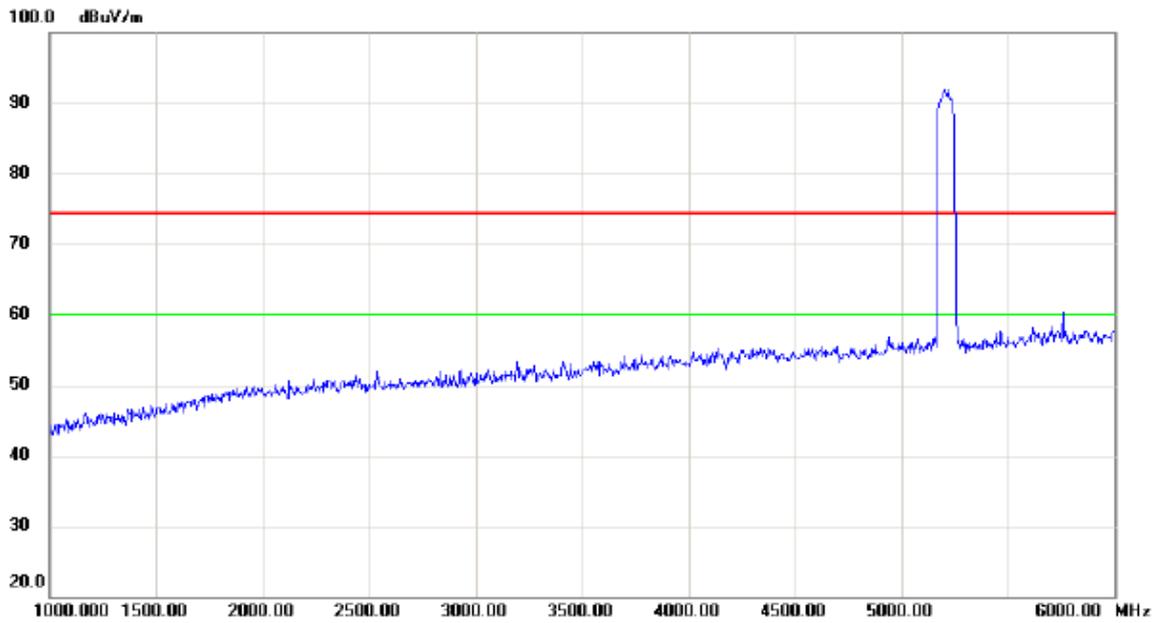


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

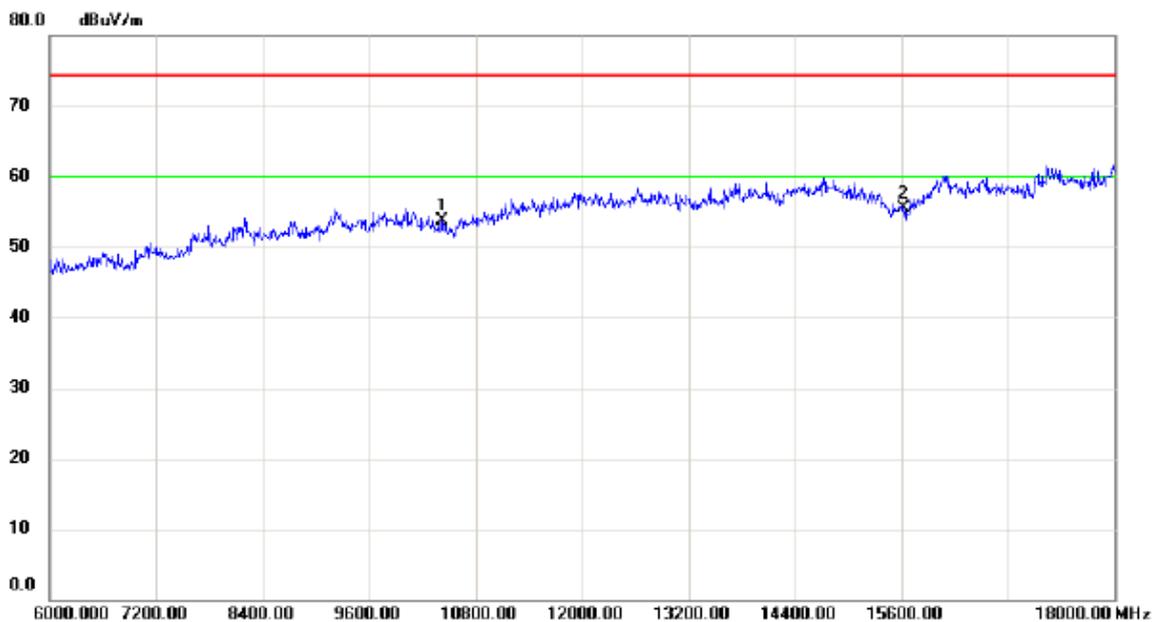


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10420.00	39.96	13.77	53.73	74.30	-20.57	peak	
2	*	15630.00	38.18	17.32	55.50	74.30	-18.80	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

### Vertical

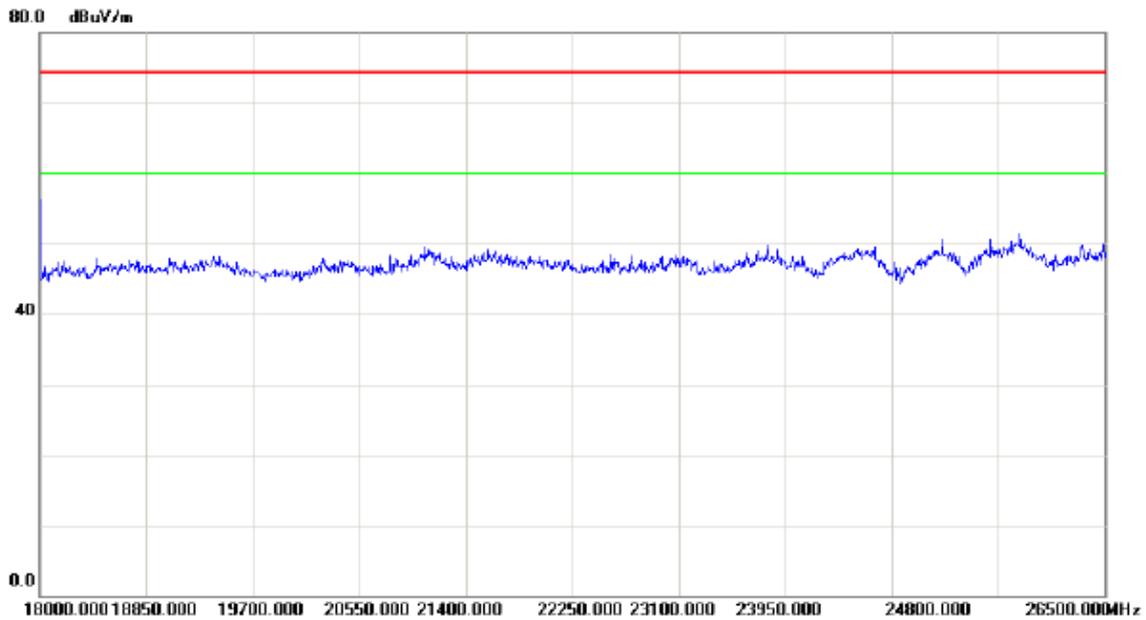


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

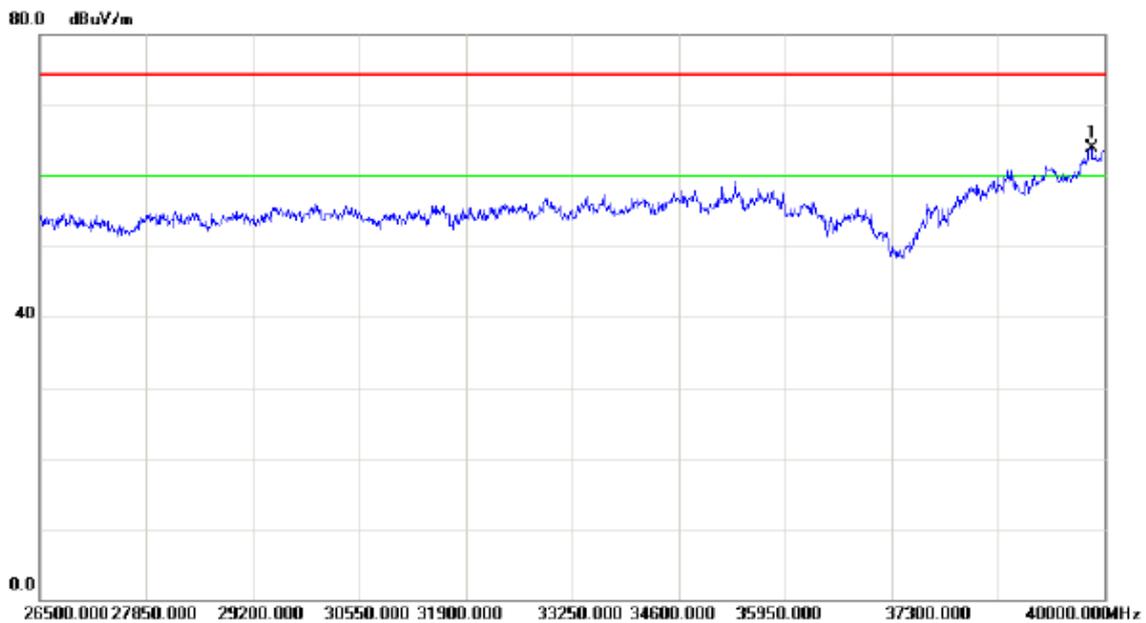

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39838.00	46.63	17.21	63.84	74.30	-10.46	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


### Horizontal

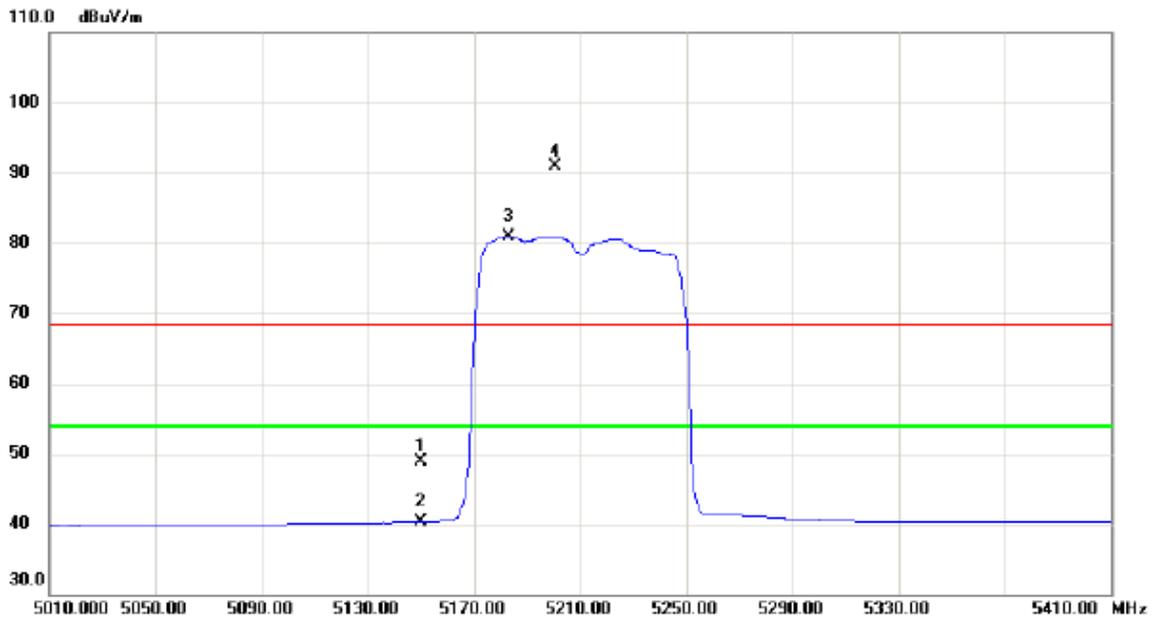


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5150.000	8.60	40.22	48.82	68.30	-19.48	peak	
2		5150.000	0.16	40.22	40.38	54.00	-13.62	AVG	
3	*	5182.800	40.64	40.29	80.93	54.00	26.93	AVG	No Limit
4	X	5200.800	50.49	40.32	90.81	68.30	22.51	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

### Horizontal

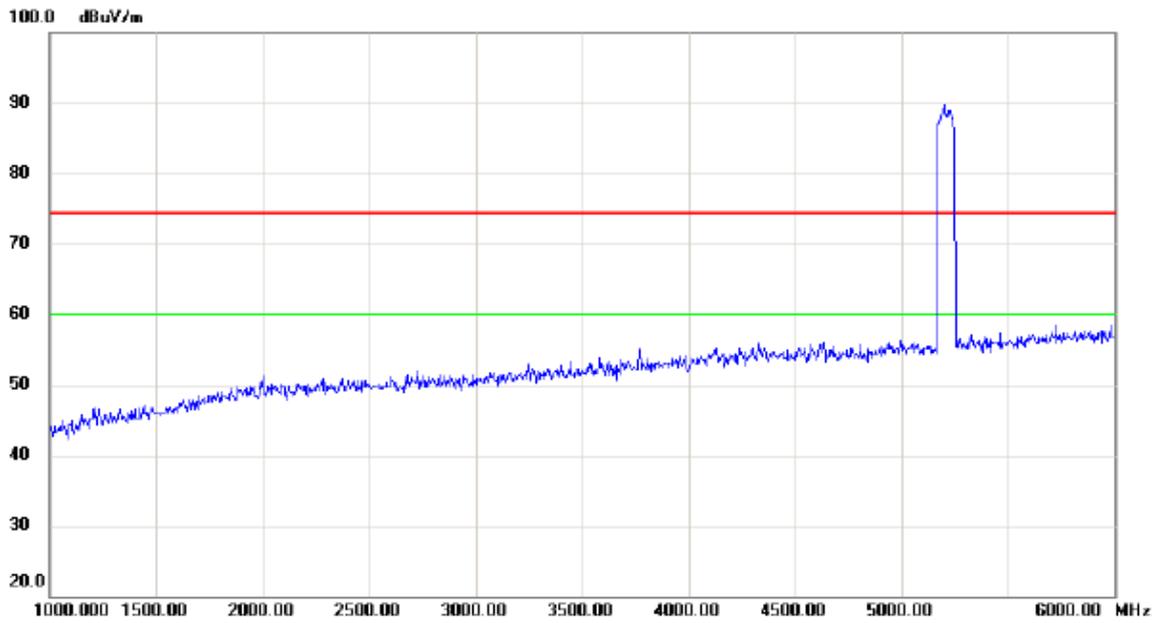

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

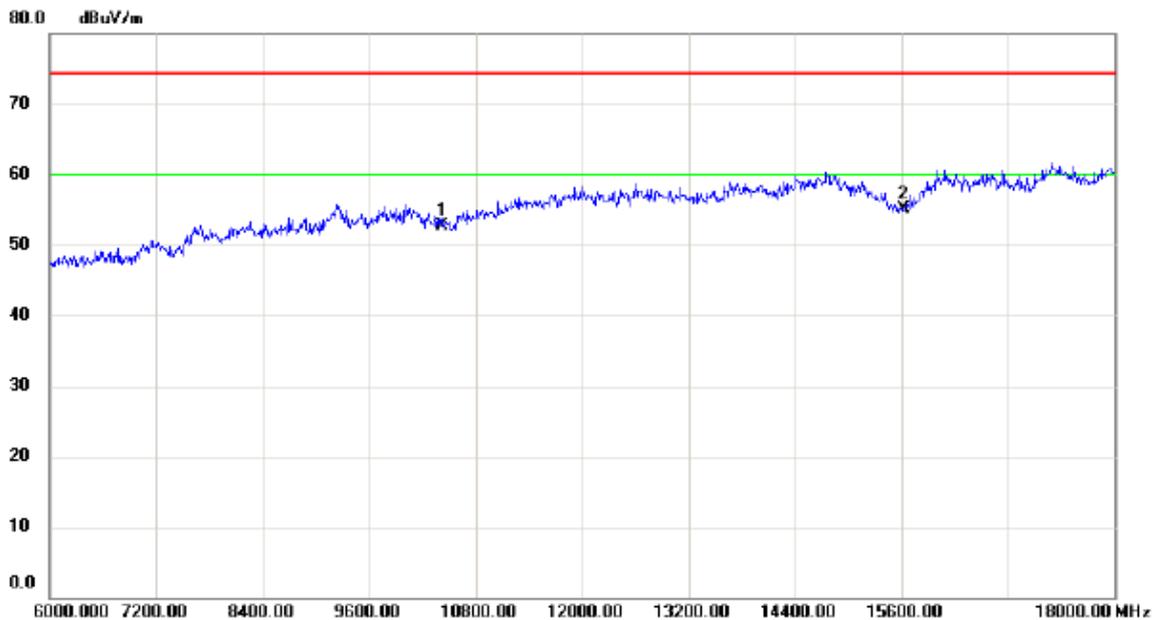


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10420.00	38.93	13.77	52.70	74.30	-21.60	peak	
2	*	15630.00	37.84	17.32	55.16	74.30	-19.14	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

### Horizontal




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

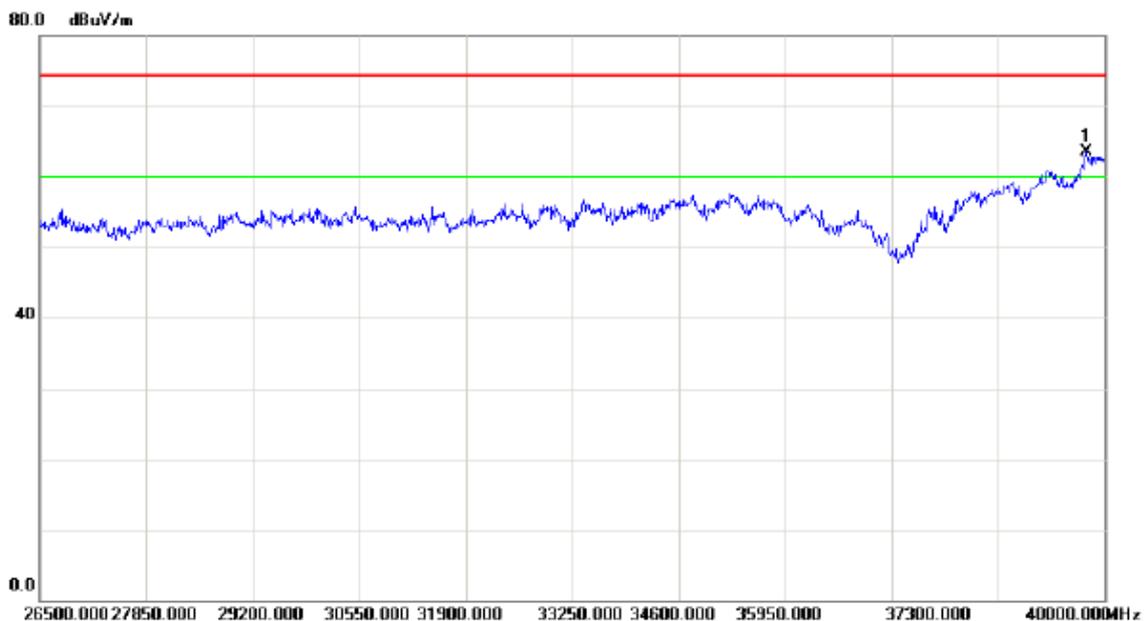

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39770.50	46.44	17.03	63.47	74.30	-10.83	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


### Vertical

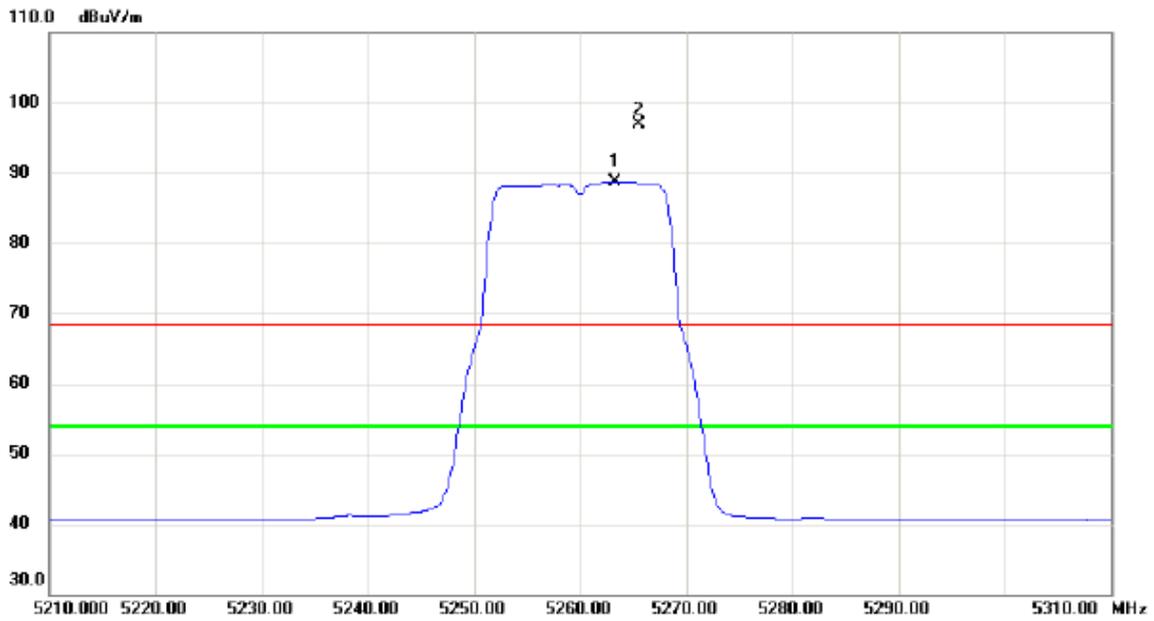


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5263.300	48.25	40.46	88.71	54.00	34.71	AVG	No Limit
2	X	5265.500	56.50	40.47	96.97	68.30	28.67	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

### Vertical

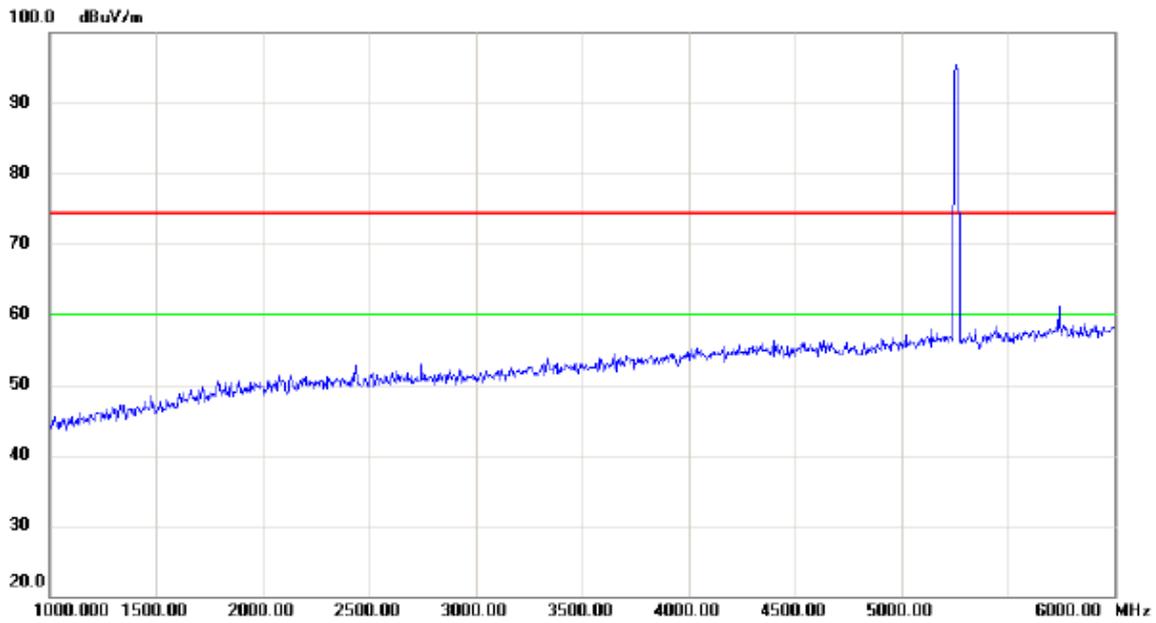


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

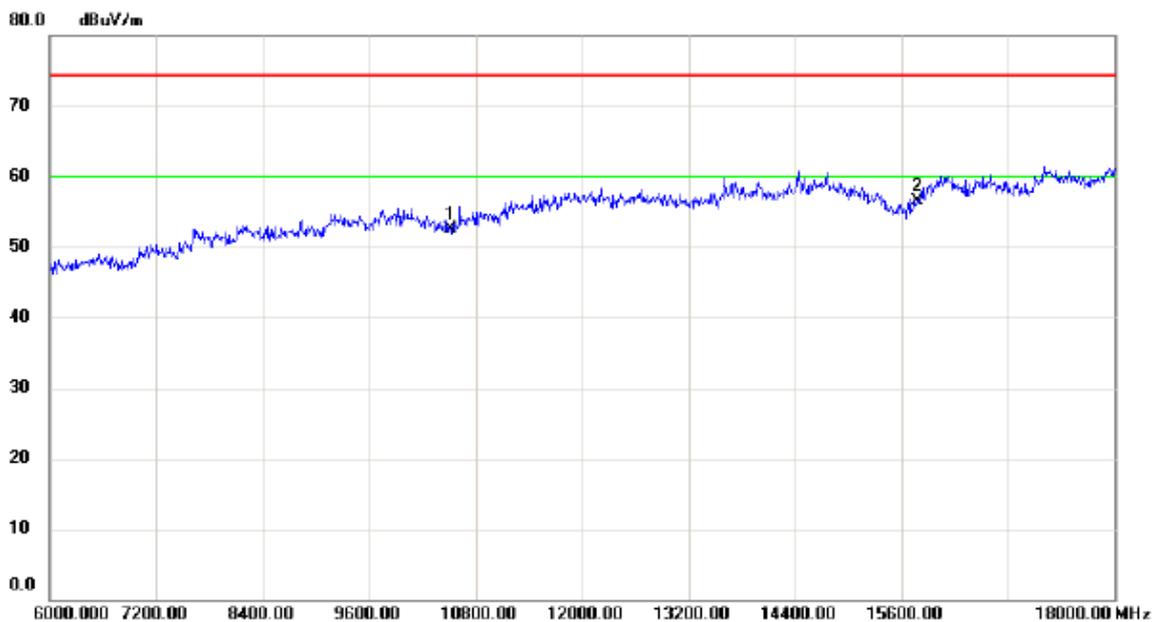


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	10520.00	38.78	13.75	52.53	74.30	-21.77	peak	
2 *	15780.00	38.31	18.10	56.41	74.30	-17.89	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

### Vertical

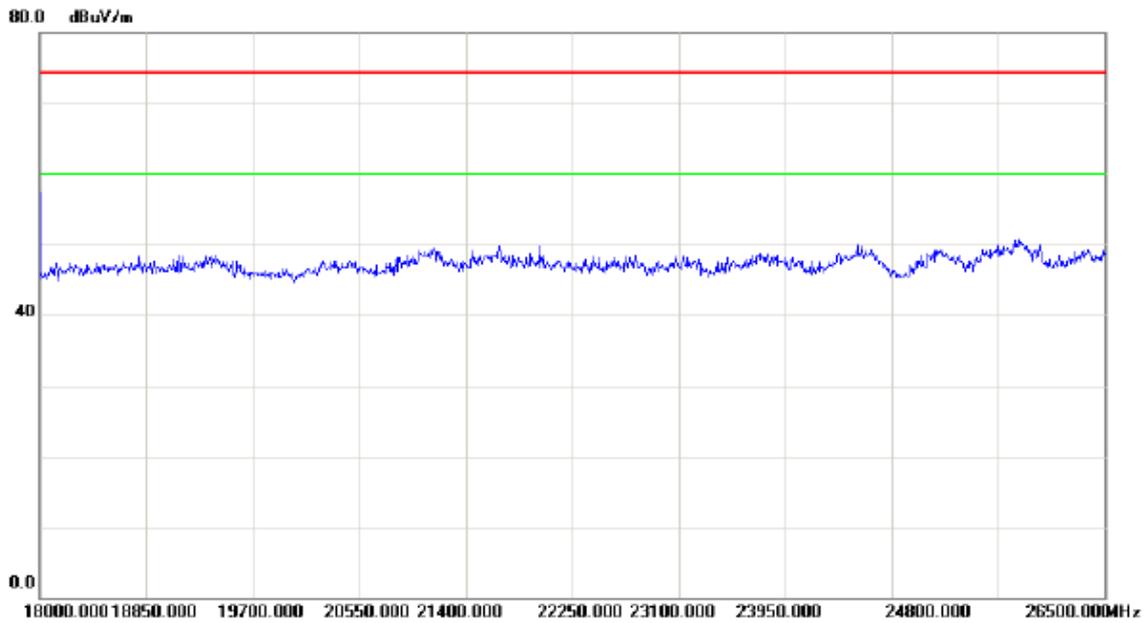


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

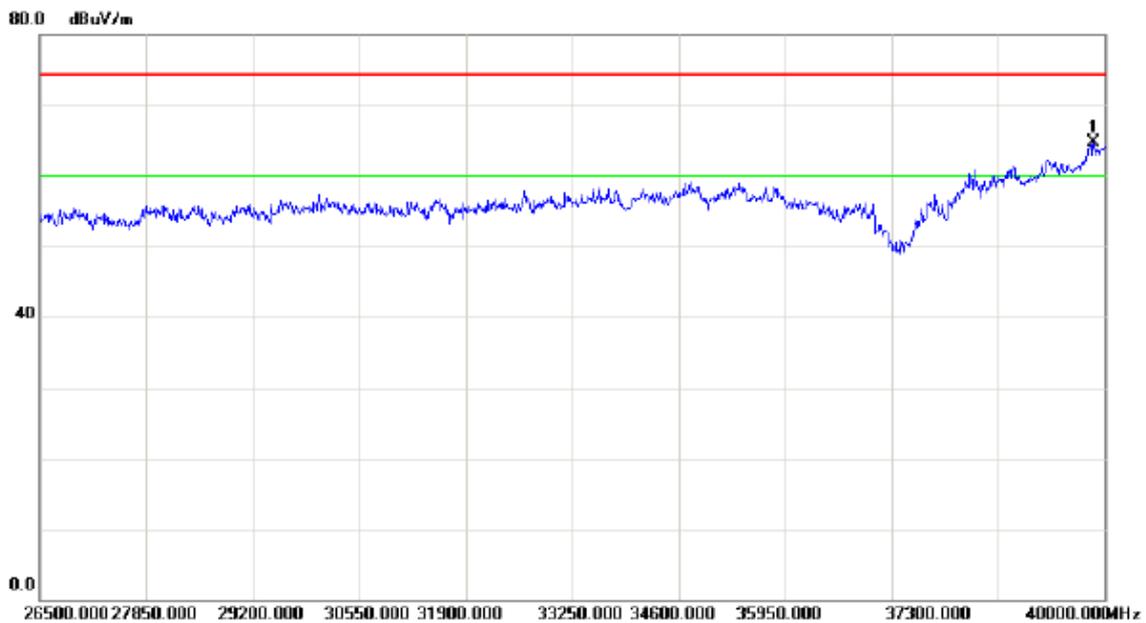

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39865.00	47.33	17.28	64.61	74.30	-9.69	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


### Horizontal

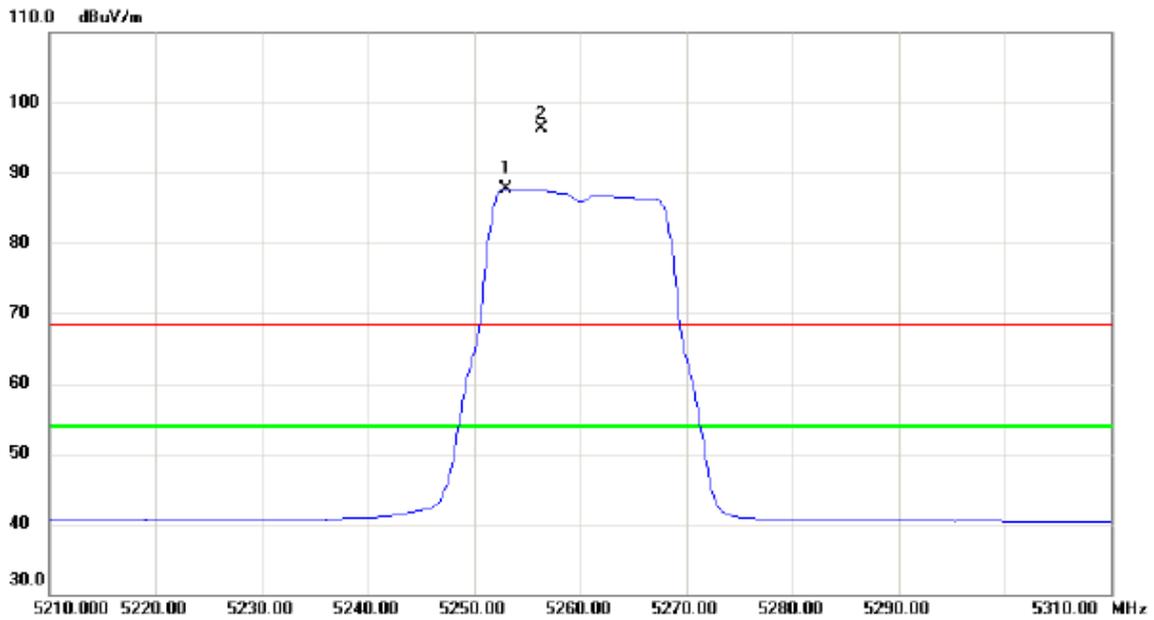


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5253.000	47.27	40.44	87.71	54.00	33.71	AVG	No Limit
2	X	5256.400	55.93	40.45	96.38	68.30	28.08	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

### Horizontal

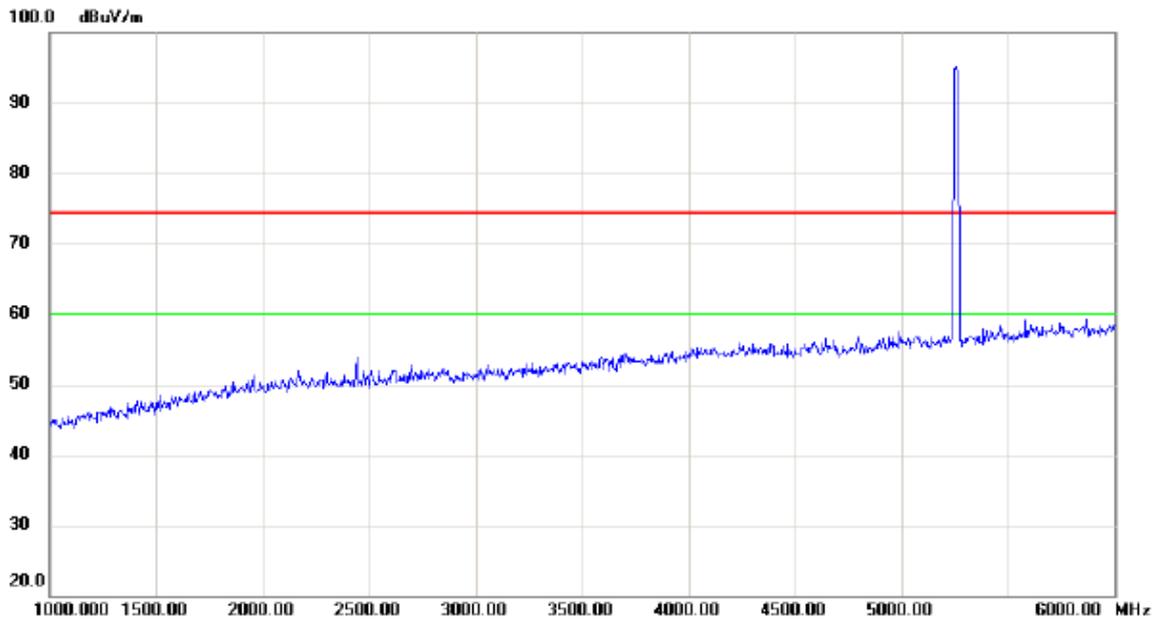


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

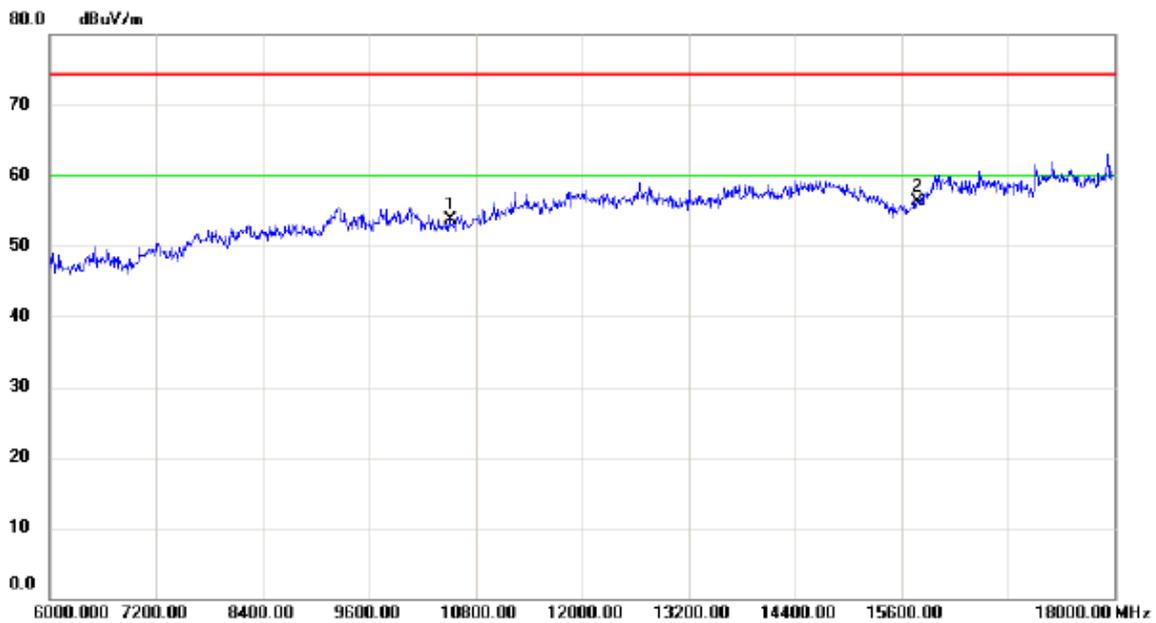


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	10520.00	39.87	13.75	53.62	74.30	-20.68	peak	
2 *	15780.00	38.20	18.10	56.30	74.30	-18.00	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

### Horizontal

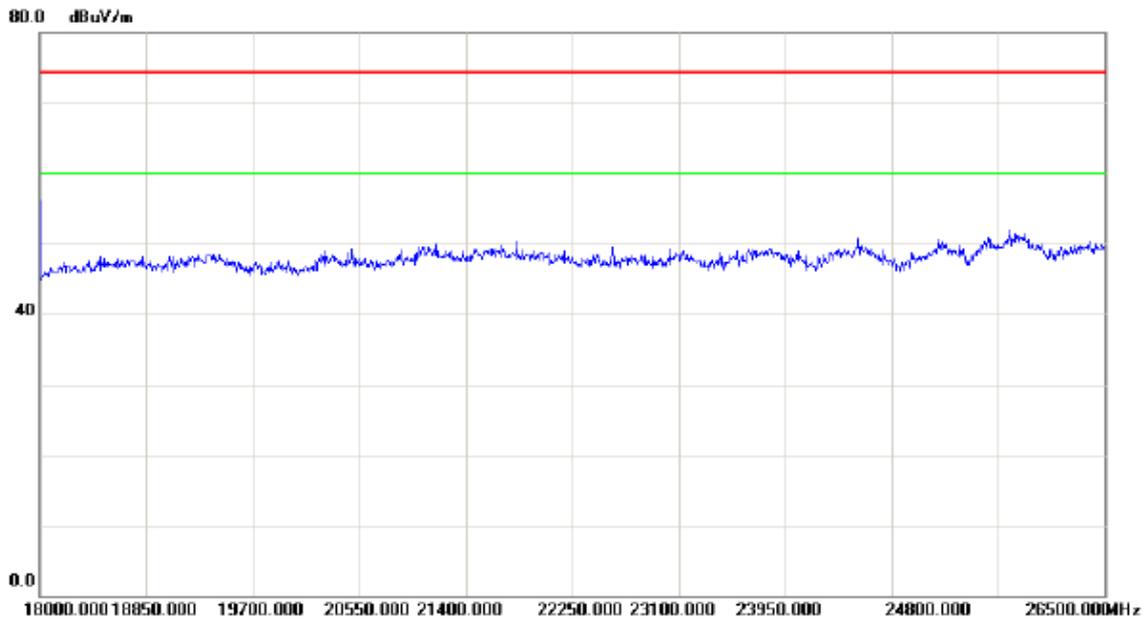


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

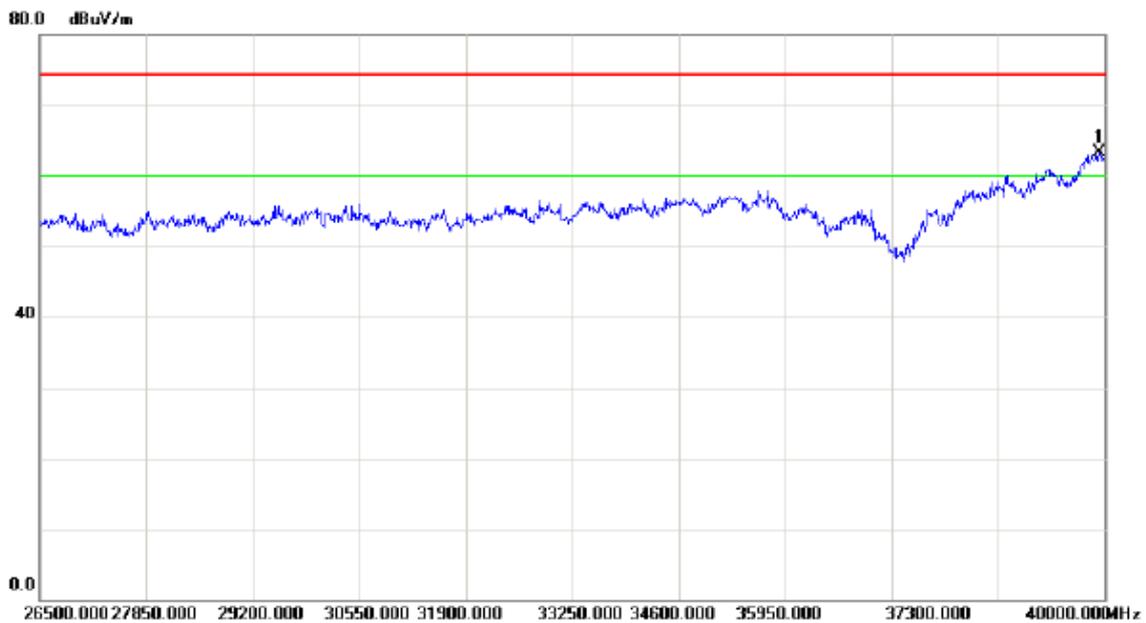

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	39932.50	45.91	17.43	63.34	74.30	-10.96	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


**Vertical**

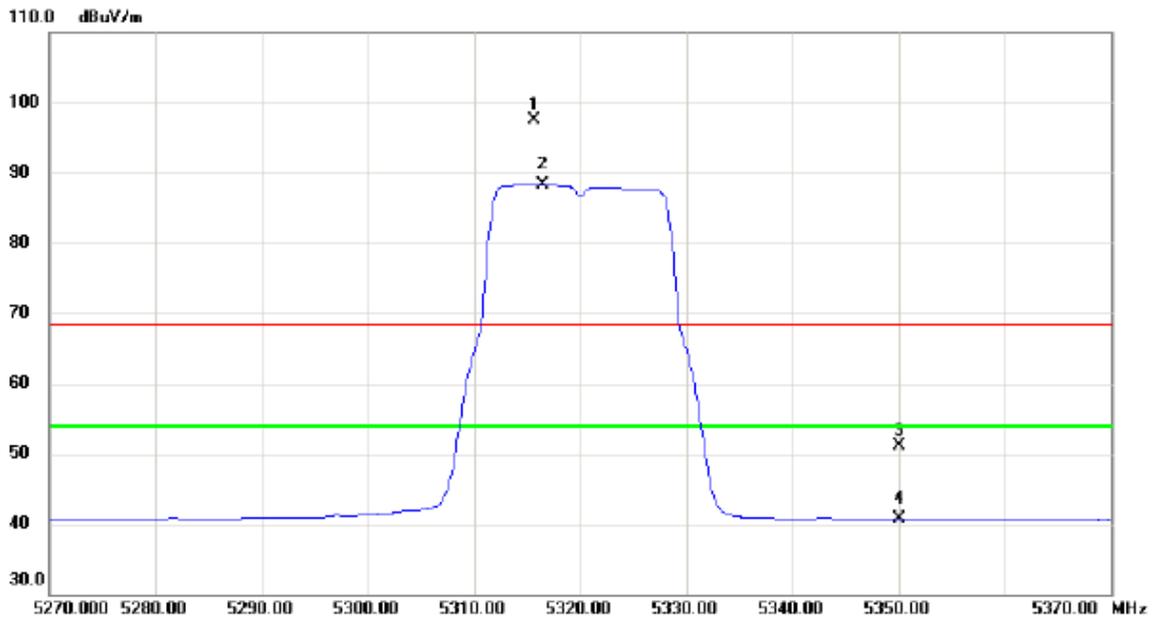


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5315.700	56.84	40.57	97.41	68.30	29.11	peak	No Limit
2	*	5316.500	47.80	40.57	88.37	54.00	34.37	AVG	No Limit
3		5350.000	10.37	40.64	51.01	68.30	-17.29	peak	
4		5350.000	0.04	40.64	40.68	54.00	-13.32	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

### Vertical

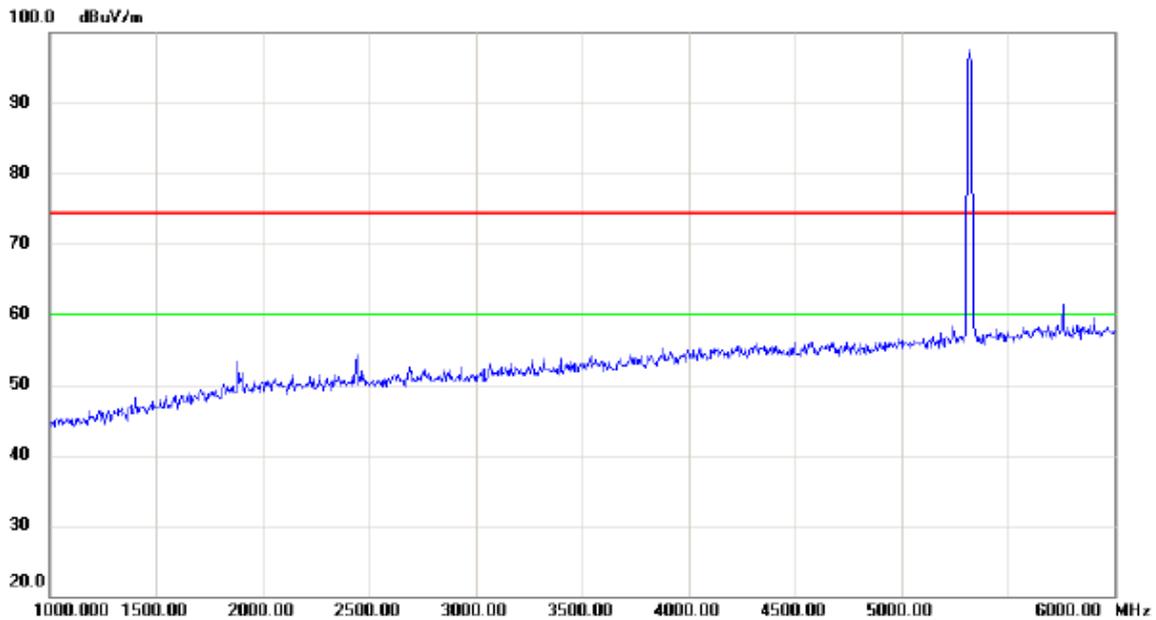


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

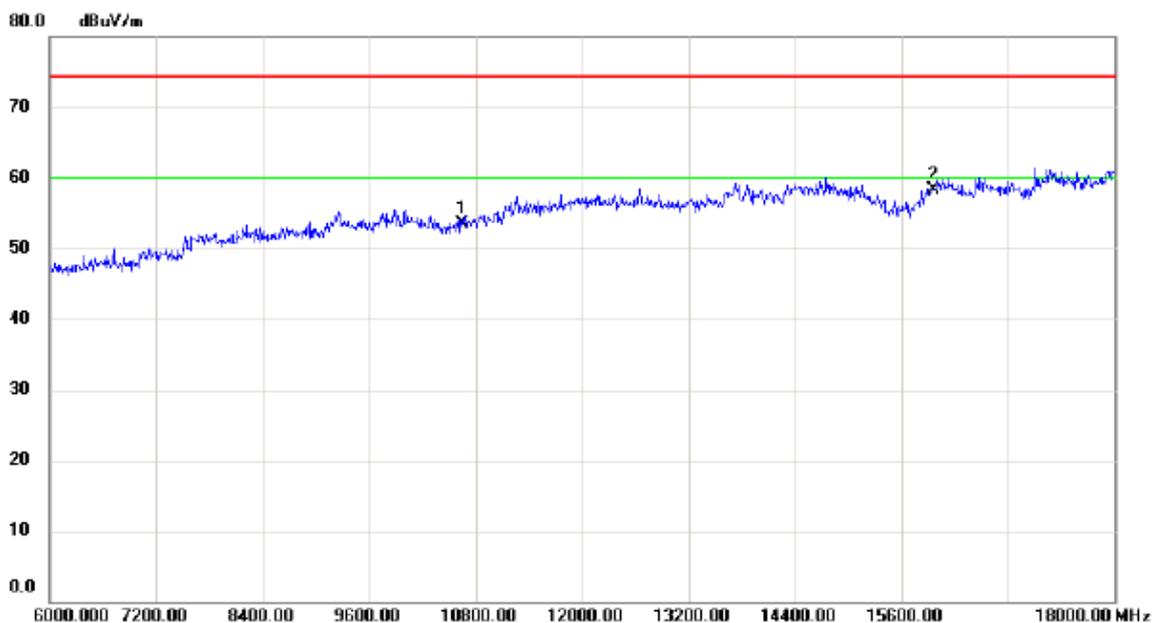


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	39.16	14.25	53.41	74.30	-20.89	peak	
2	*	15960.00	39.26	19.04	58.30	74.30	-16.00	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

### Vertical

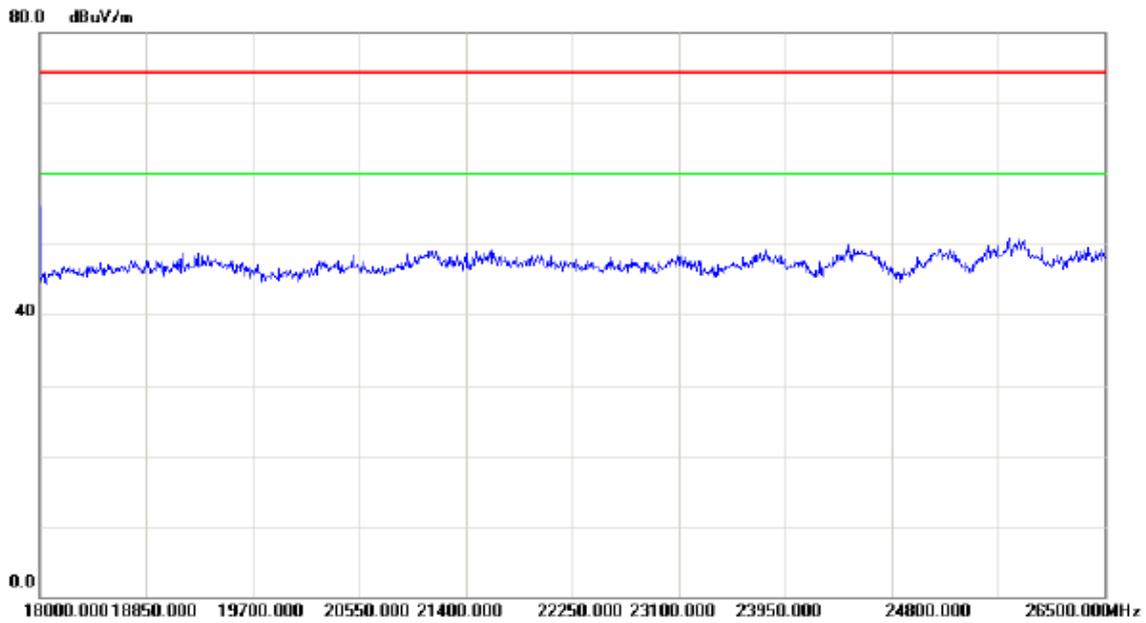


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

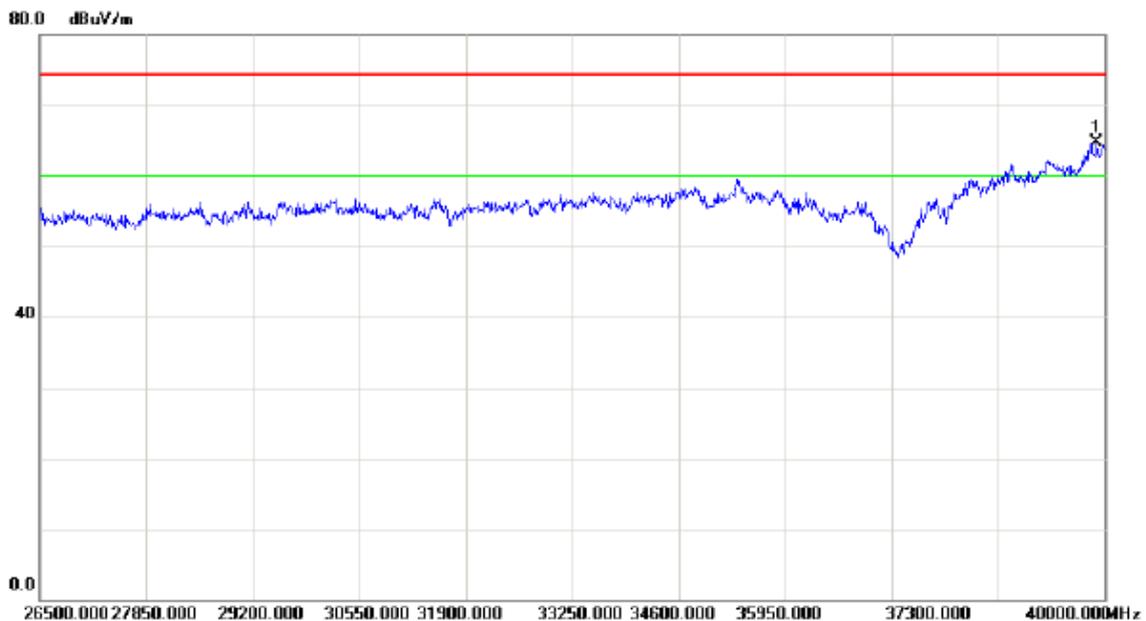

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39905.50	47.33	17.37	64.70	74.30	-9.60	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


### Horizontal

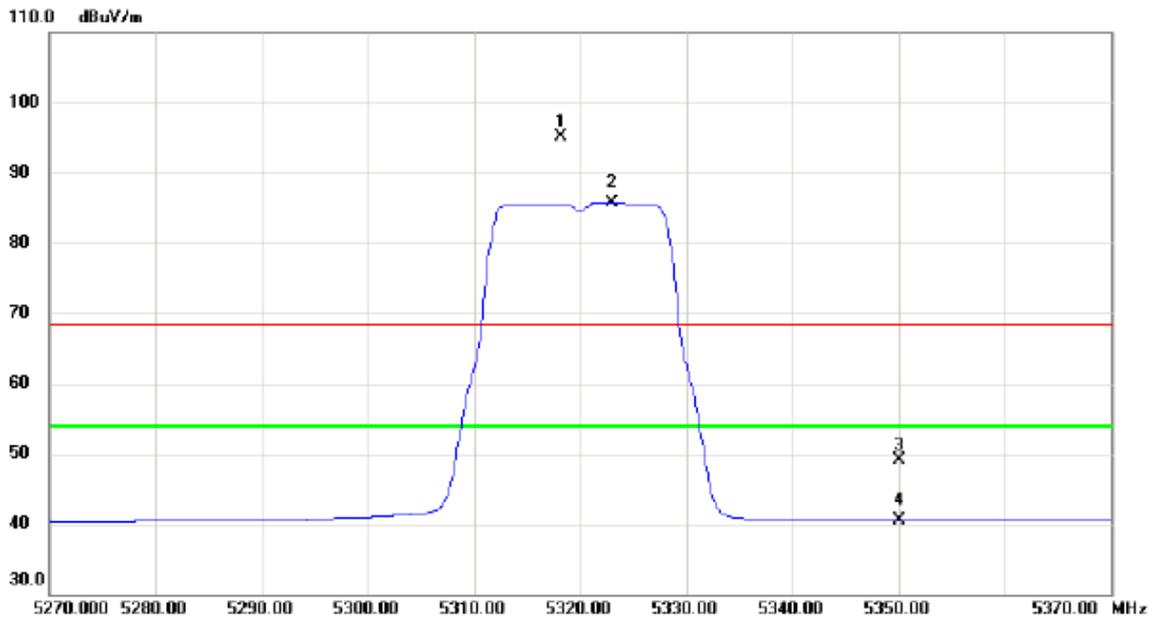

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5318.200	54.53	40.57	95.10	68.30	26.80	peak	No Limit
2	*	5323.000	45.13	40.59	85.72	54.00	31.72	AVG	No Limit
3		5350.000	8.42	40.64	49.06	68.30	-19.24	peak	
4		5350.000	-0.14	40.64	40.50	54.00	-13.50	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

### Horizontal

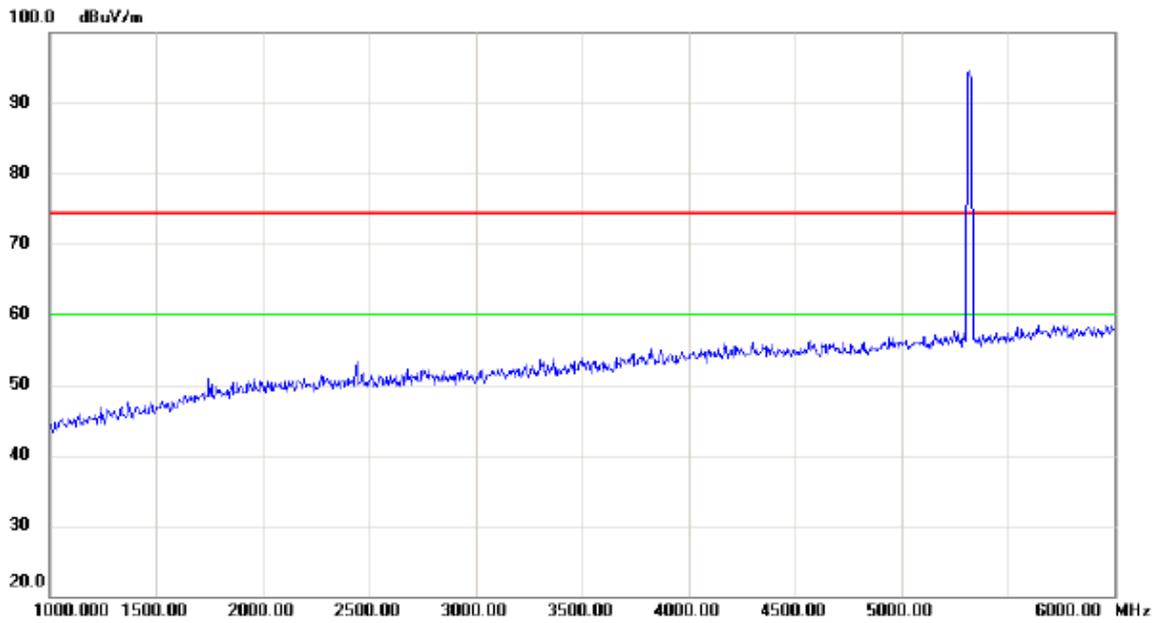


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	39.37	14.25	53.62	74.30	-20.68	peak	
2	*	15960.00	39.46	19.04	58.50	74.30	-15.80	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

### Horizontal

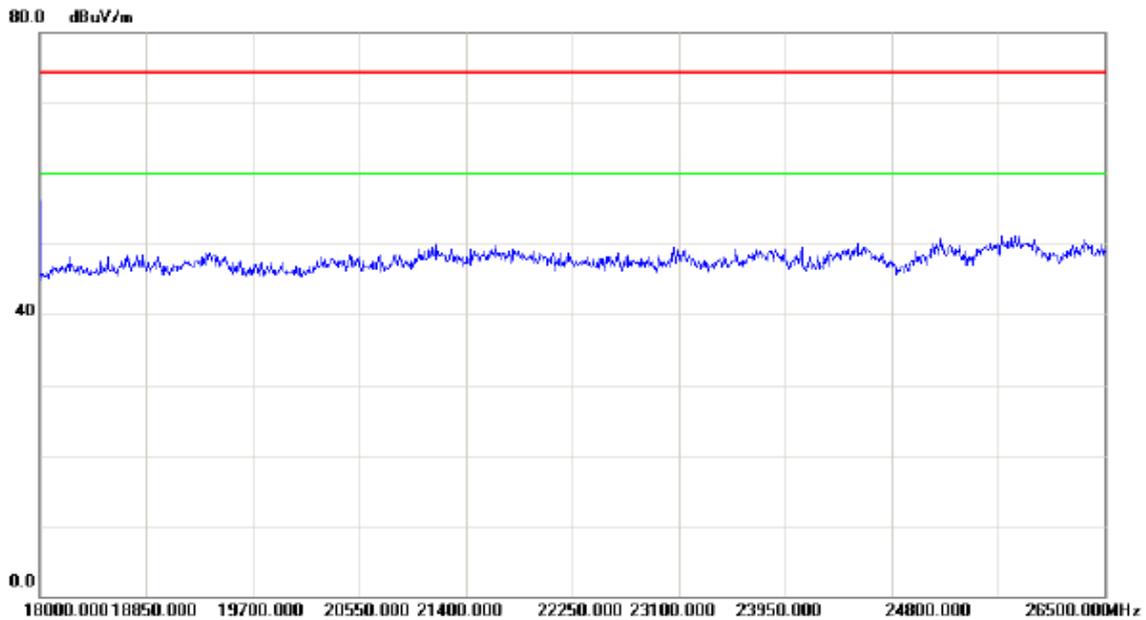


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

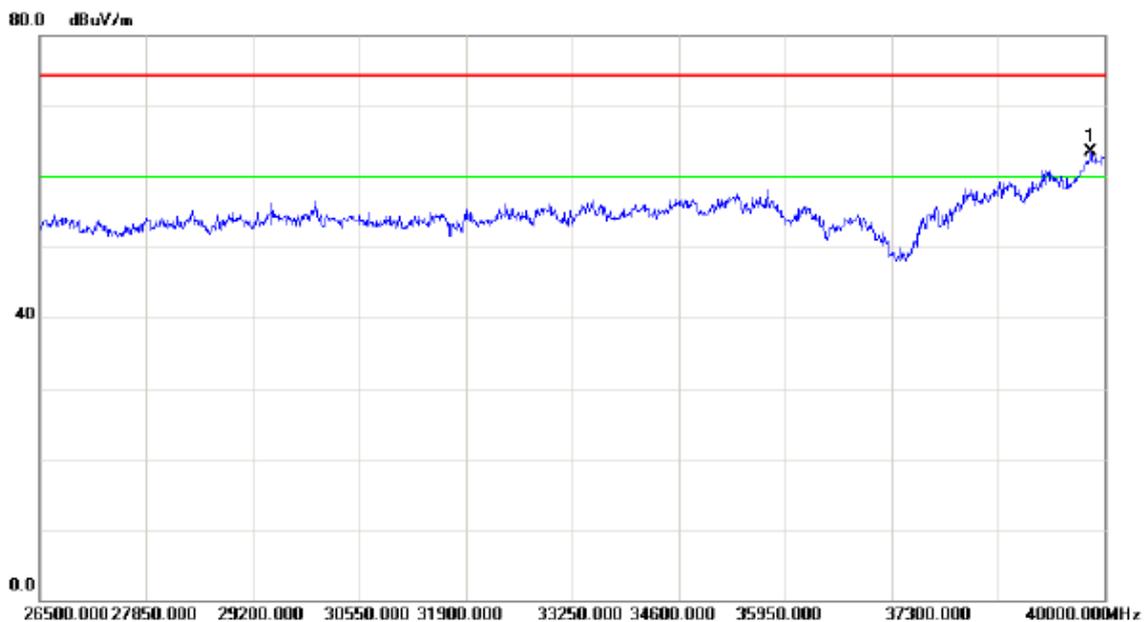

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39824.50	46.43	17.17	63.60	74.30	-10.70	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


### Vertical

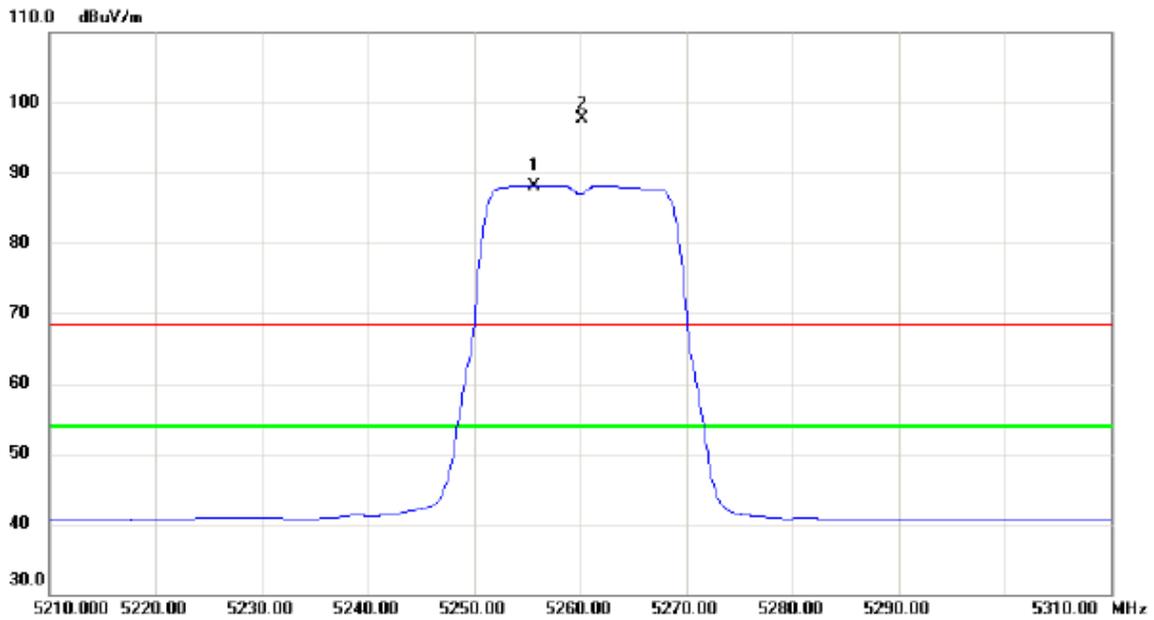


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5255.700	47.73	40.44	88.17	54.00	34.17	AVG	No Limit
2	X	5260.200	57.28	40.45	97.73	68.30	29.43	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

### Vertical

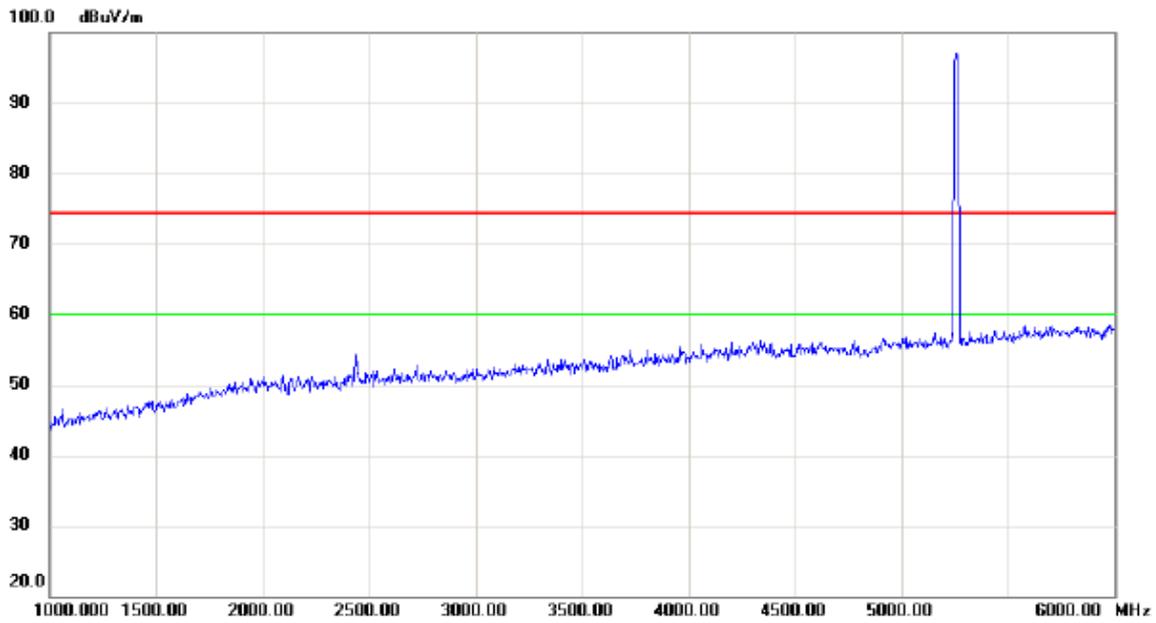


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

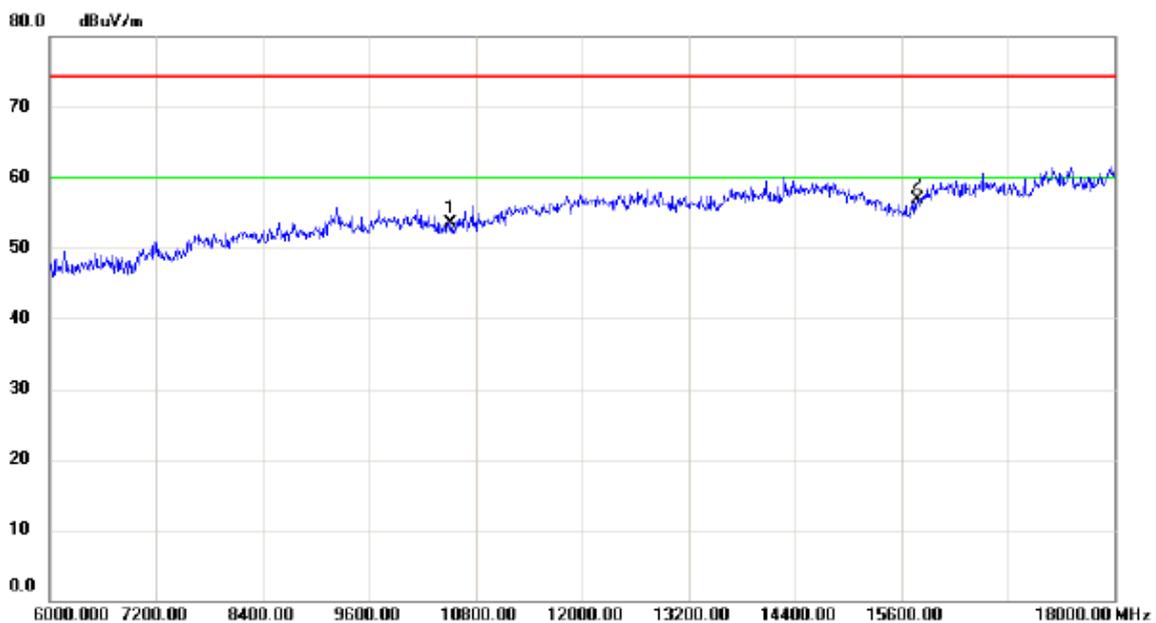


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	10520.00	39.72	13.75	53.47	74.30	-20.83	peak	
2 *	15780.00	38.79	18.10	56.89	74.30	-17.41	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

### Vertical

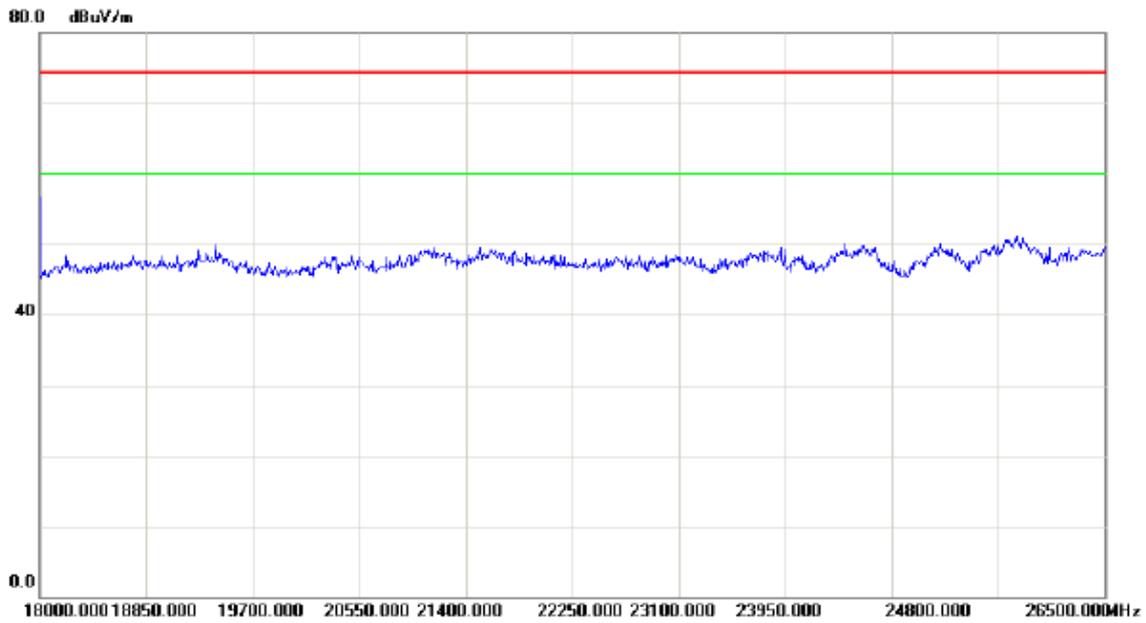


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

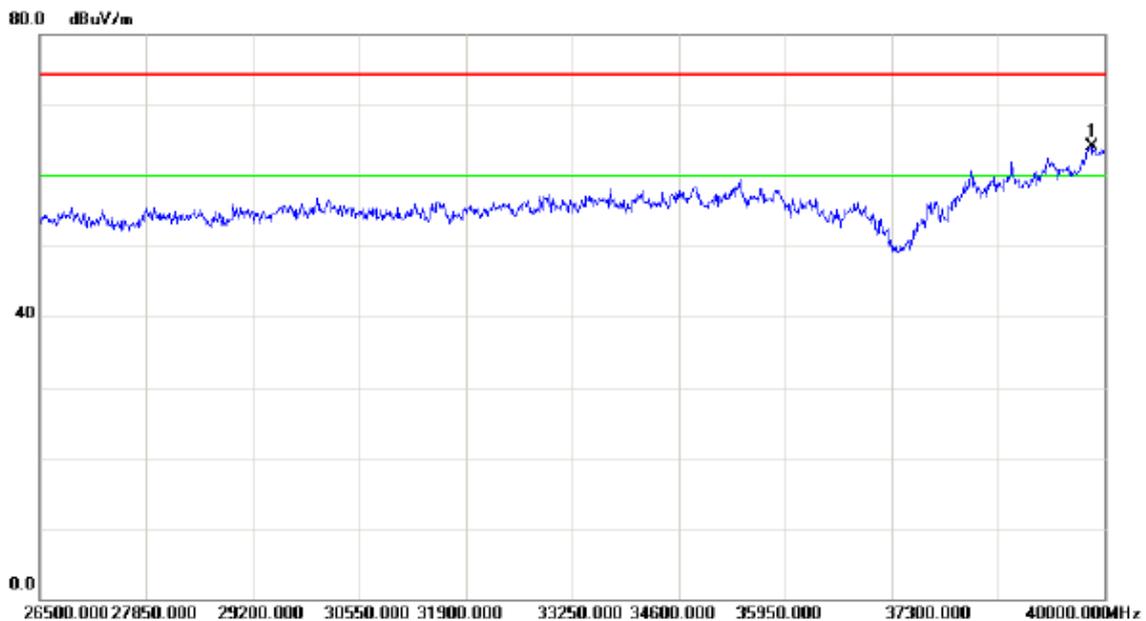

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39838.00	46.81	17.21	64.02	74.30	-10.28	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


### Horizontal

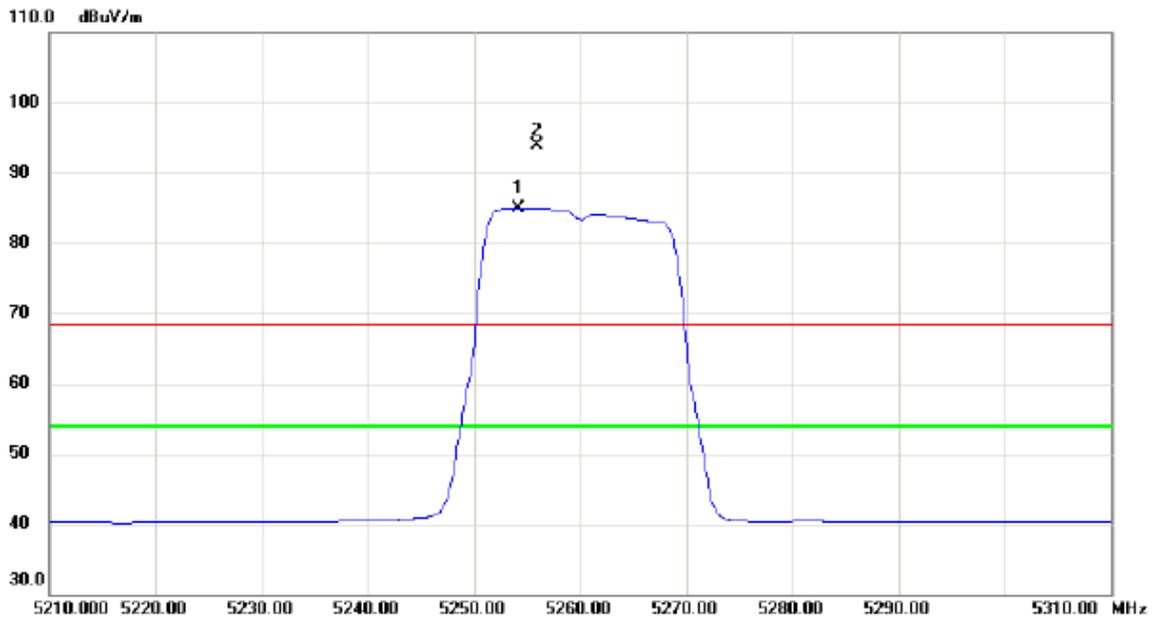


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5254.200	44.53	40.44	84.97	54.00	30.97	AVG	No Limit
2	X	5255.900	53.38	40.44	93.82	68.30	25.52	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

### Horizontal

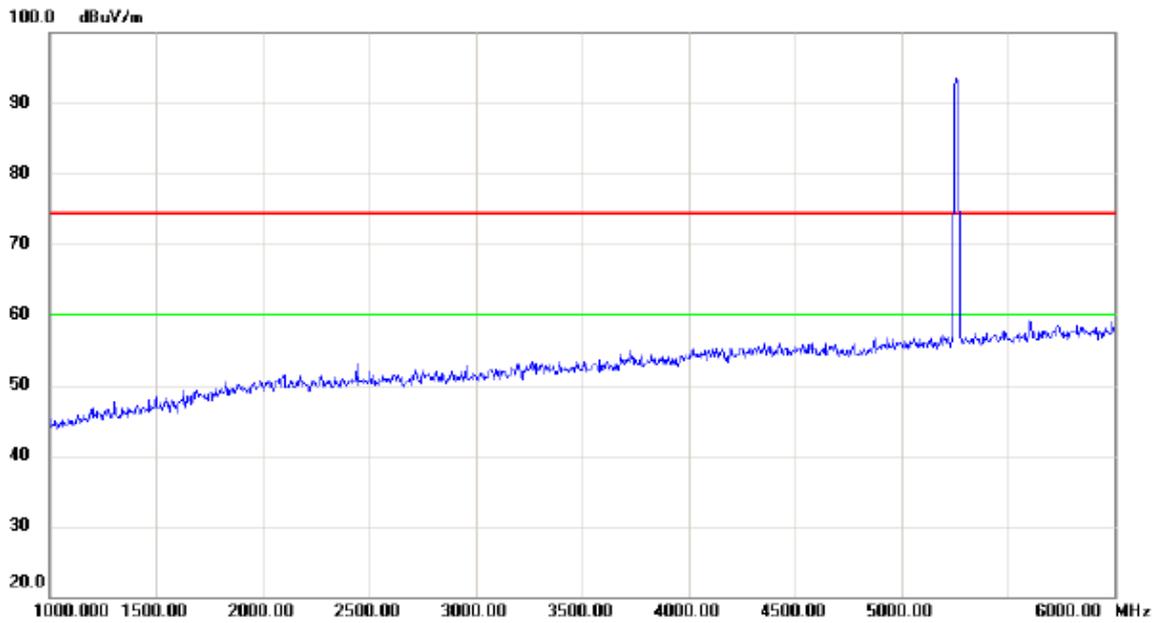


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

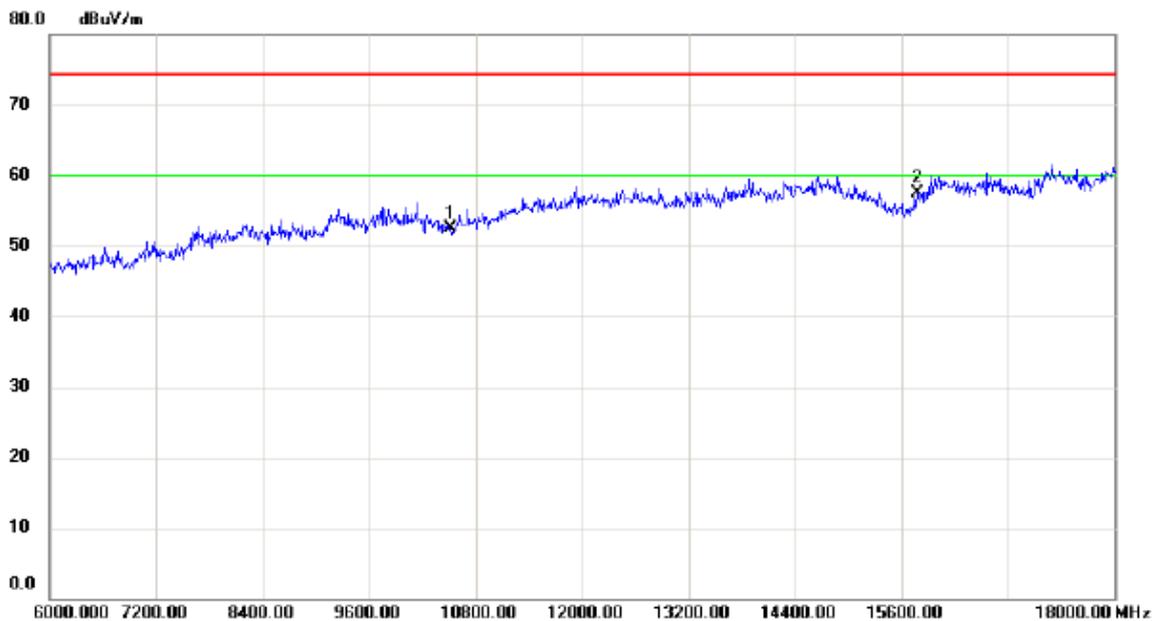


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10520.00	38.80	13.75	52.55	74.30	-21.75	peak	
2	*	15780.00	39.37	18.10	57.47	74.30	-16.83	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

### Horizontal

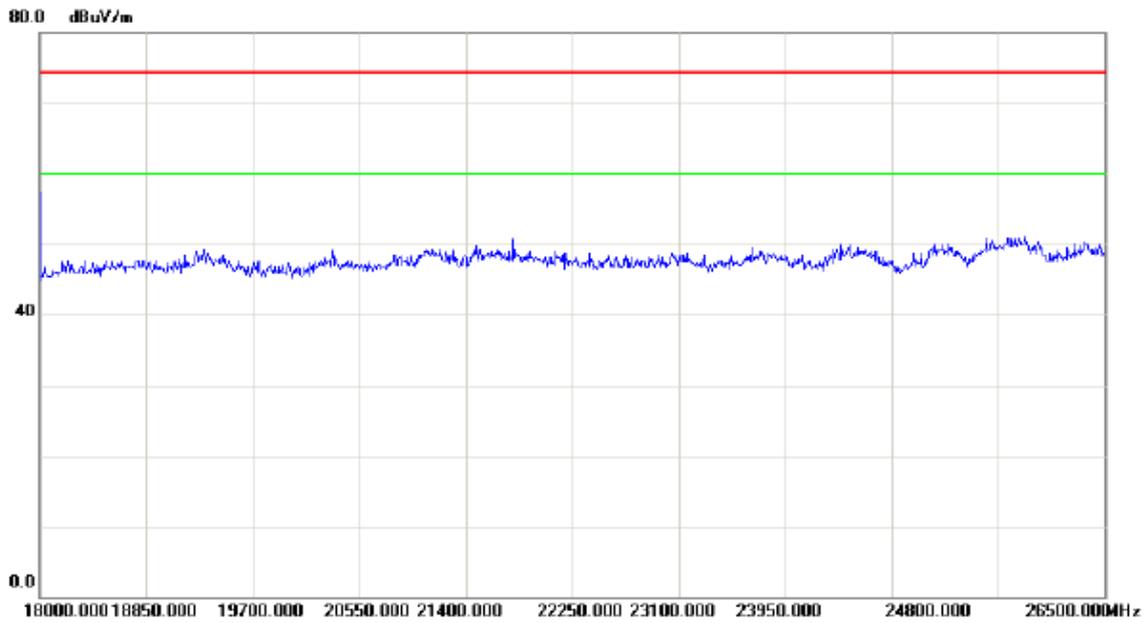


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

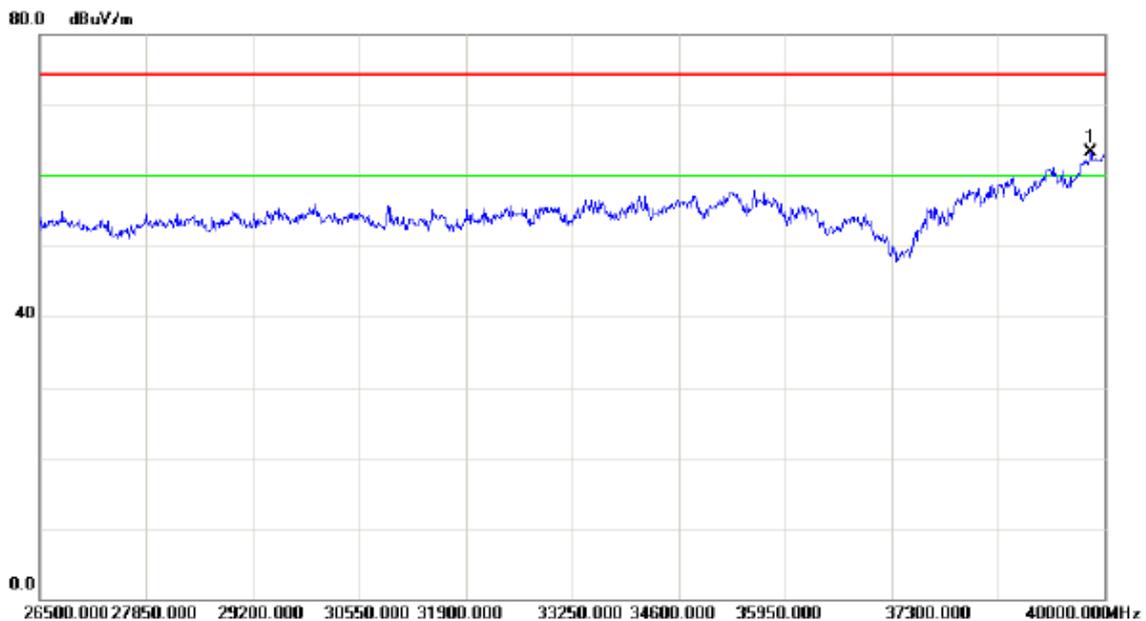

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39824.50	46.15	17.17	63.32	74.30	-10.98	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


### Vertical

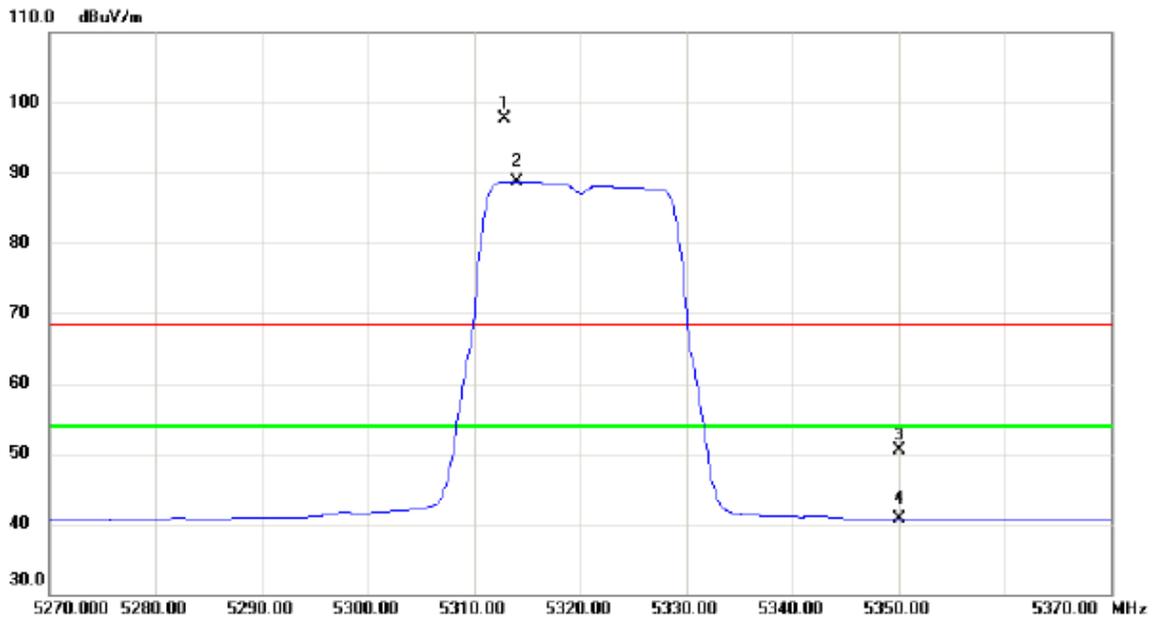


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5312.800	57.16	40.56	97.72	68.30	29.42	peak	No Limit
2	*	5314.100	48.23	40.56	88.79	54.00	34.79	AVG	No Limit
3		5350.000	9.80	40.64	50.44	68.30	-17.86	peak	
4		5350.000	0.09	40.64	40.73	54.00	-13.27	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

### Vertical

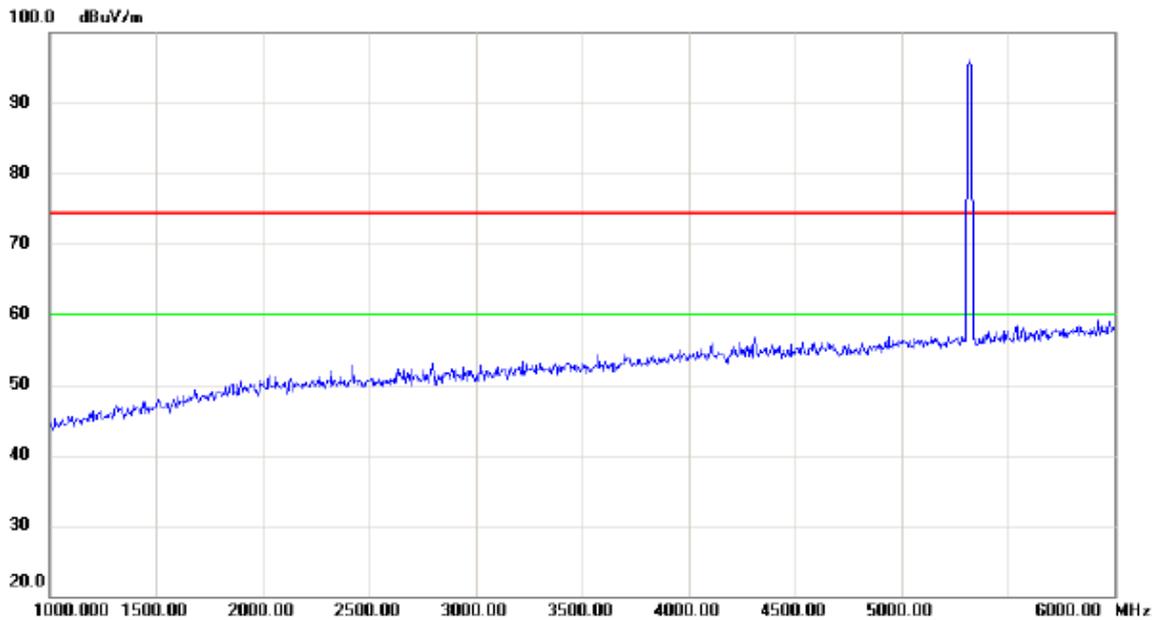


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

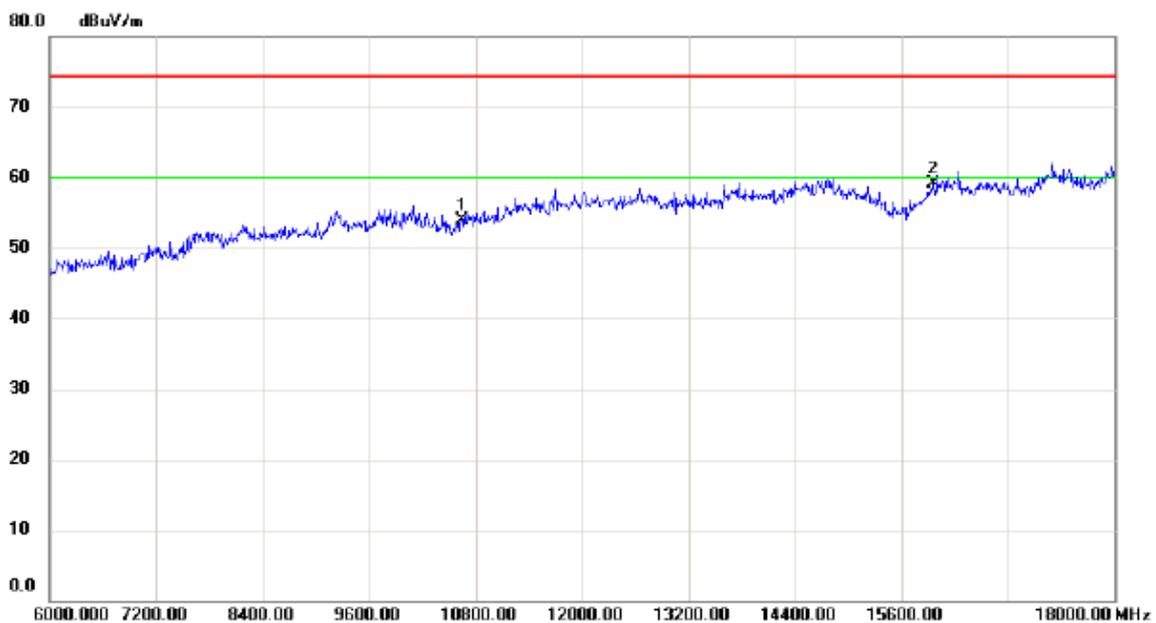


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	39.73	14.25	53.98	74.30	-20.32	peak	
2	*	15960.00	40.02	19.04	59.06	74.30	-15.24	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

### Vertical

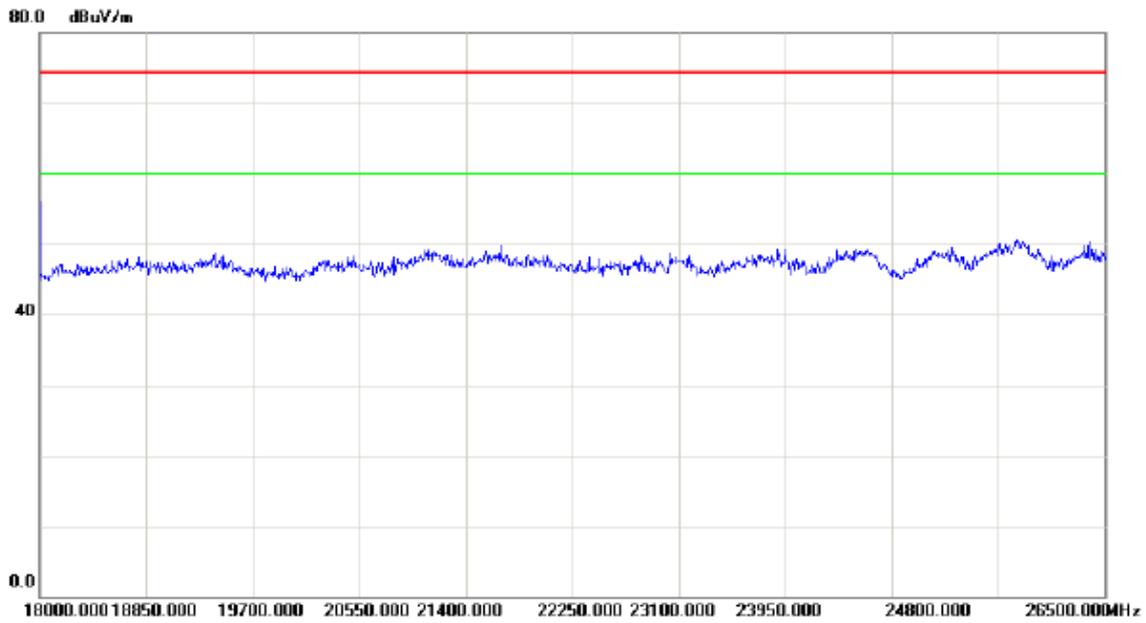


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

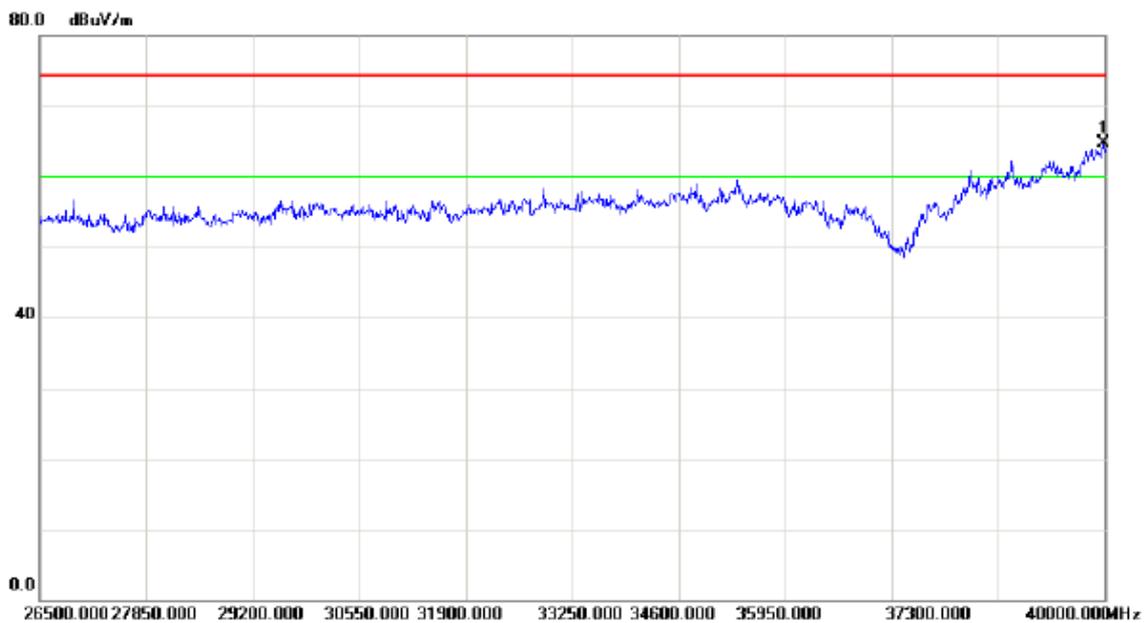

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39986.50	47.05	17.56	64.61	74.30	-9.69	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


### Horizontal

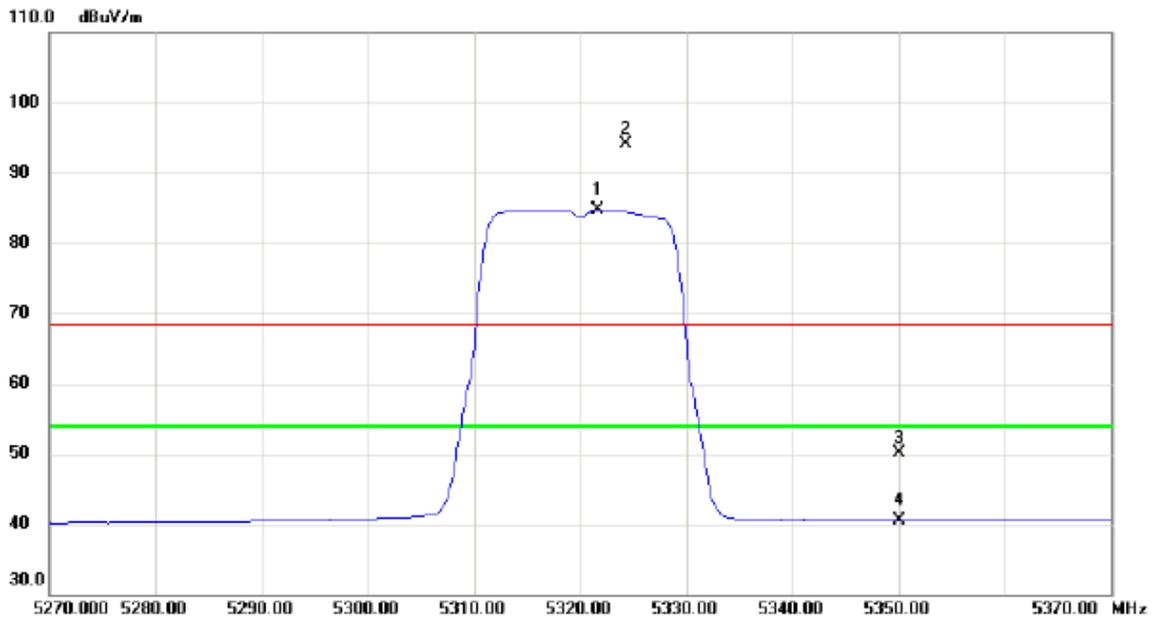


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5321.600	44.15	40.58	84.73	54.00	30.73	AVG	No Limit
2	X	5324.300	53.50	40.59	94.09	68.30	25.79	peak	No Limit
3		5350.000	9.48	40.64	50.12	68.30	-18.18	peak	
4		5350.000	-0.17	40.64	40.47	54.00	-13.53	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

### Horizontal

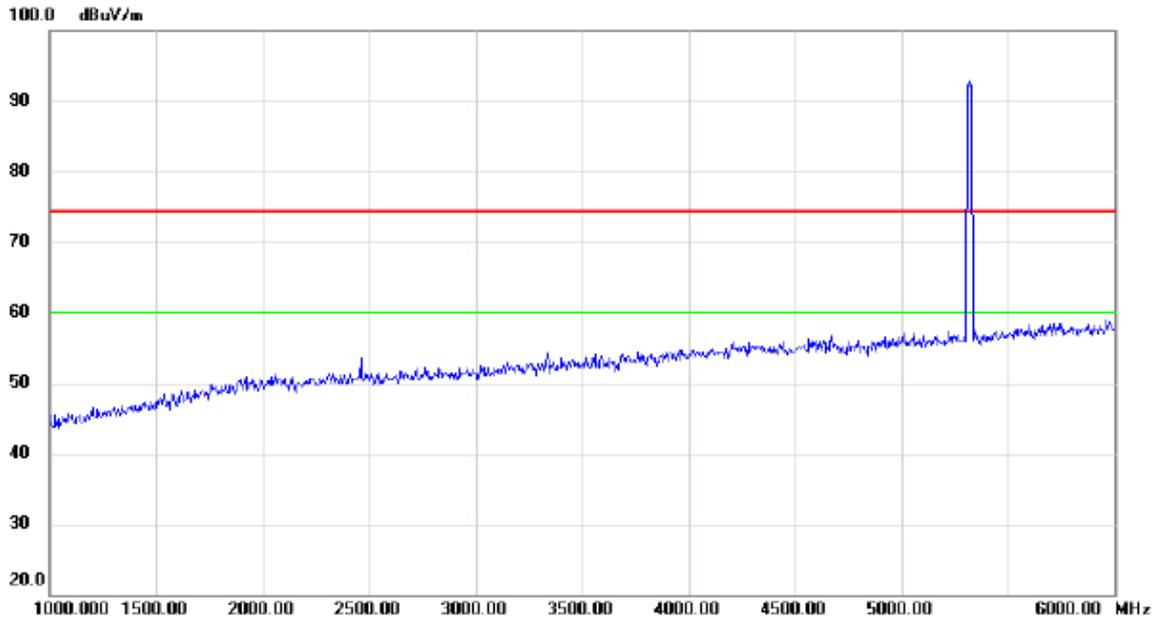


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

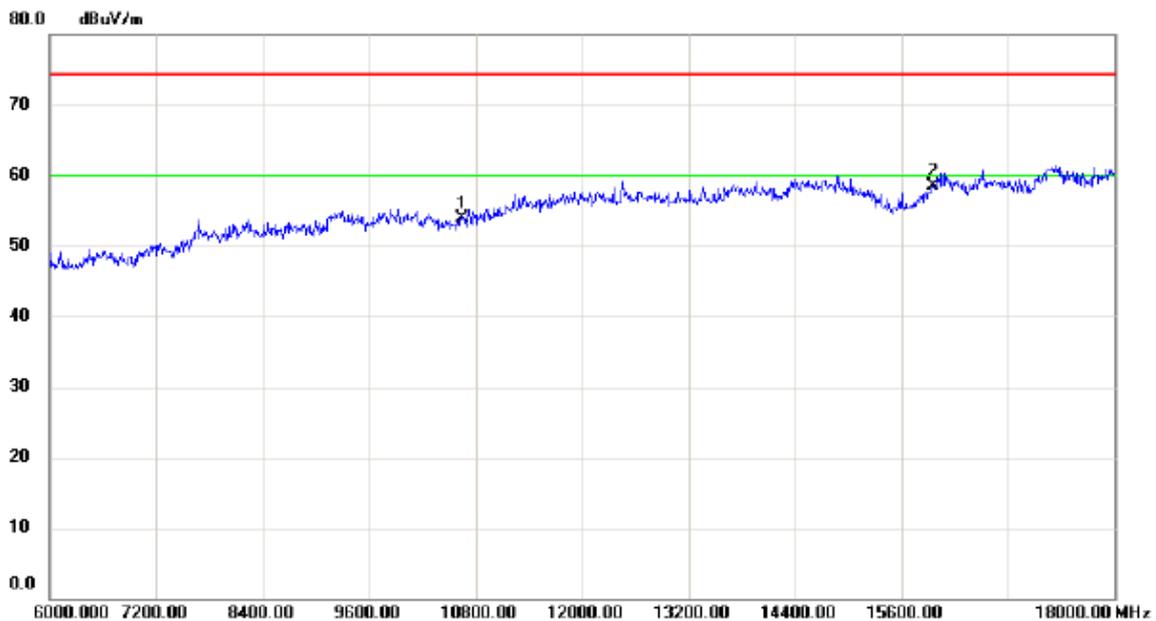


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	39.63	14.25	53.88	74.30	-20.42	peak	
2	*	15960.00	39.44	19.04	58.48	74.30	-15.82	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

### Horizontal

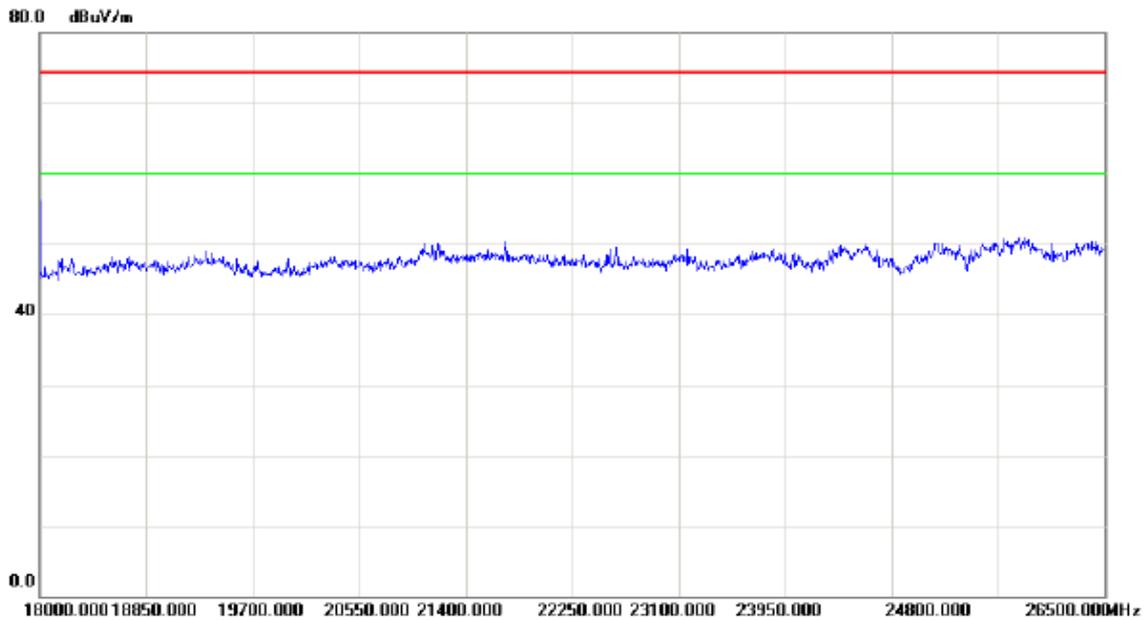


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

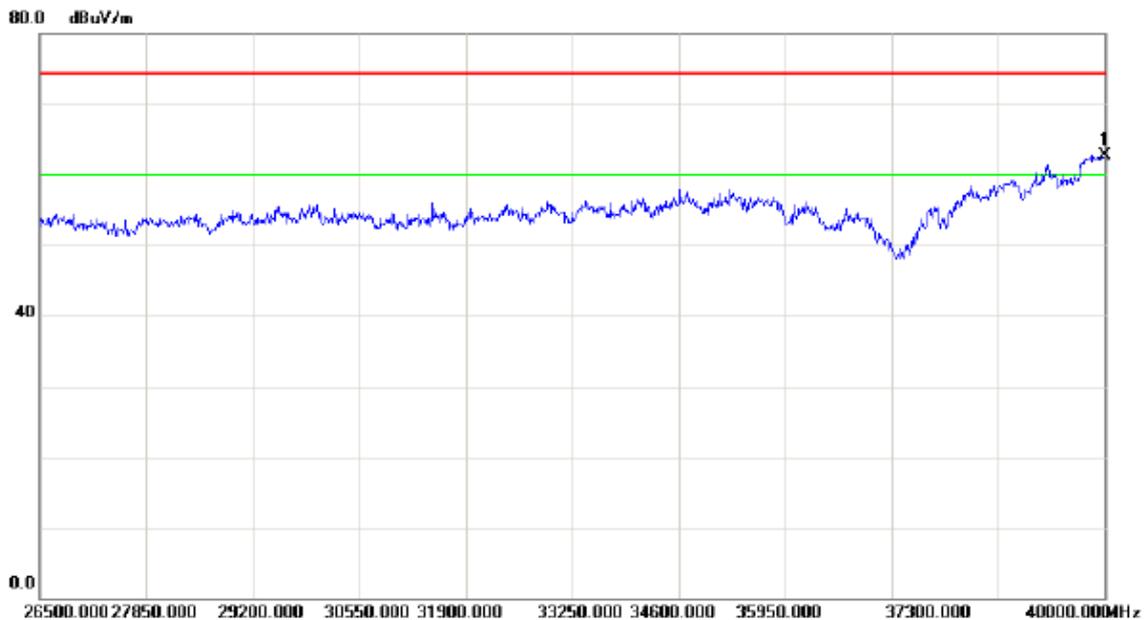

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	40000.00	45.11	17.60	62.71	74.30	-11.59	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


### Vertical

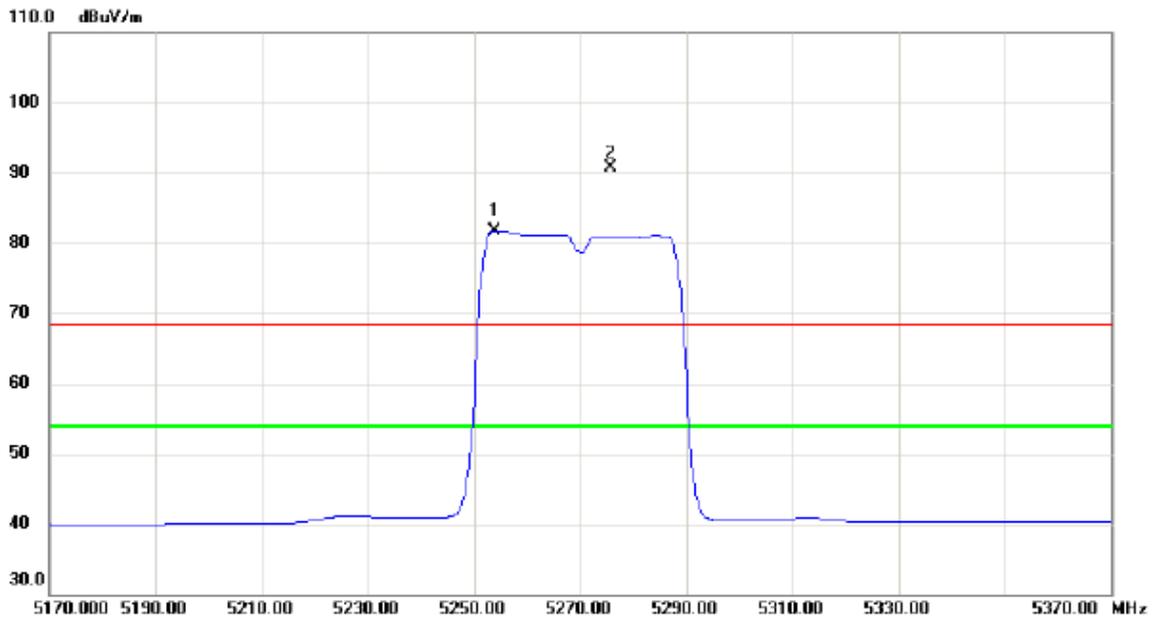


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5253.800	41.35	40.44	81.79	54.00	27.79	AVG	No Limit
2	X	5275.600	50.28	40.48	90.76	68.30	22.46	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

### Vertical

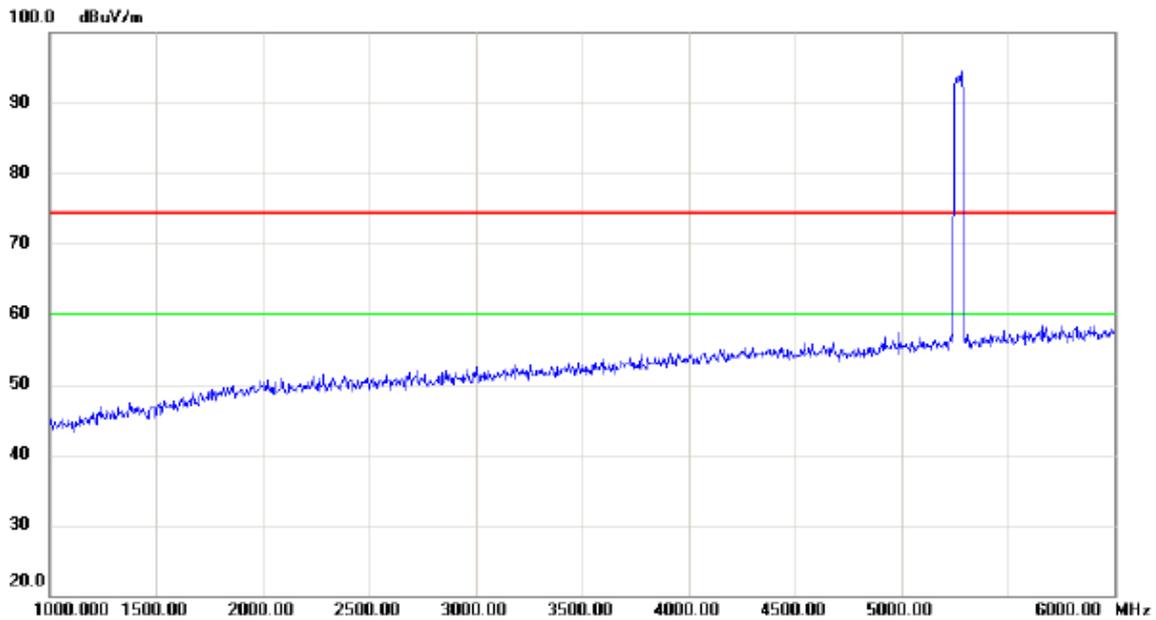


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

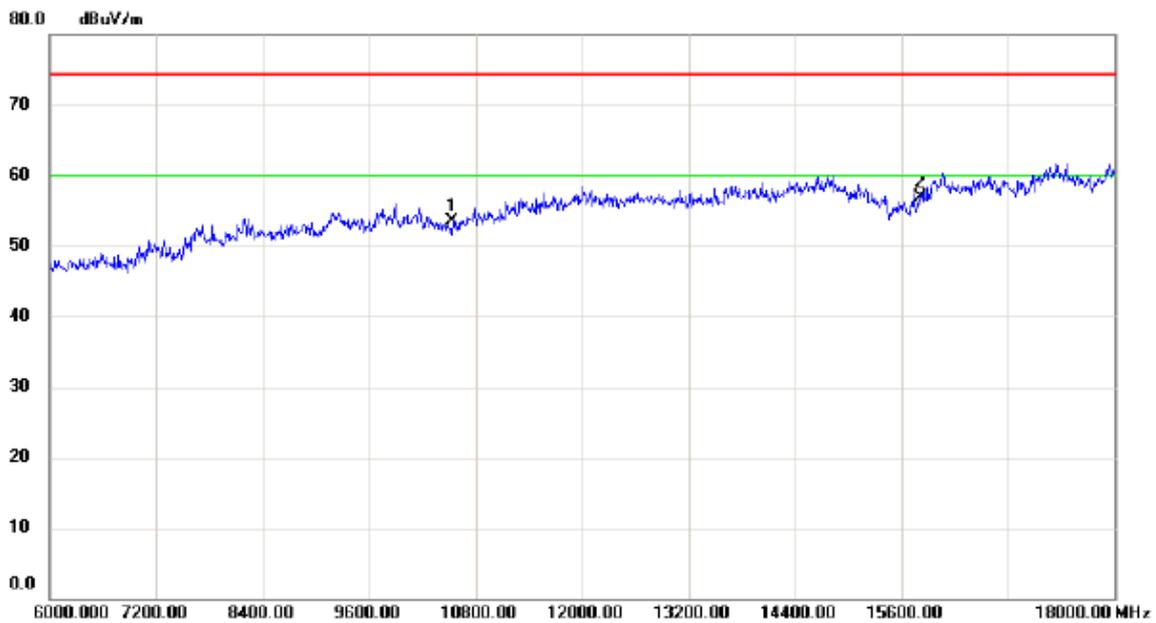


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	10540.00	39.58	13.84	53.42	74.30	-20.88	peak	
2 *	15810.00	38.68	18.25	56.93	74.30	-17.37	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

### Vertical

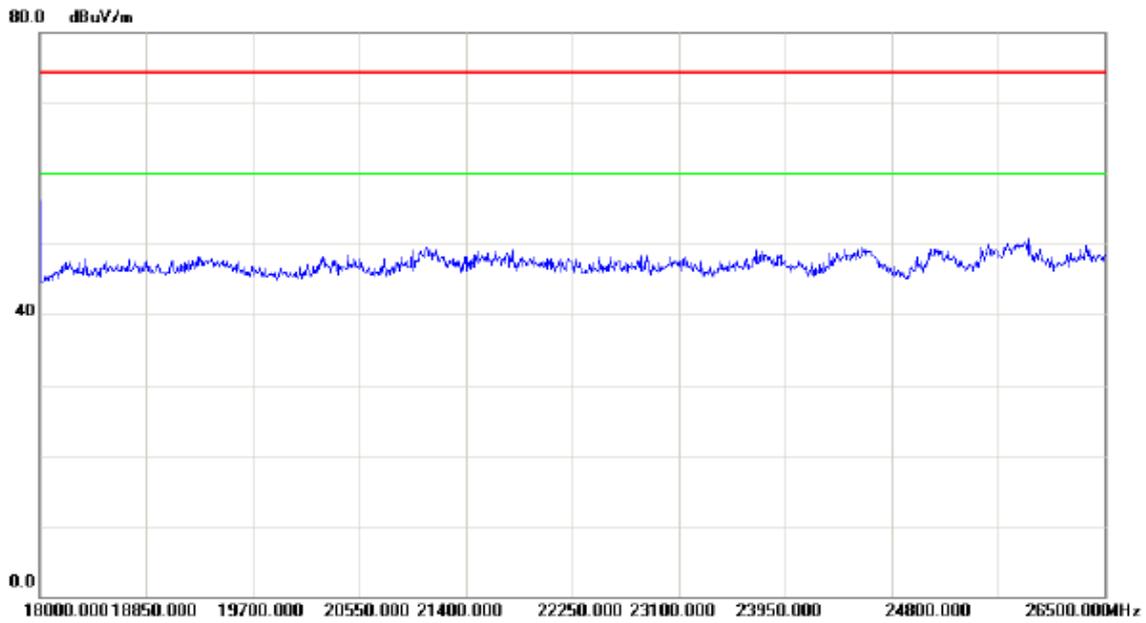


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

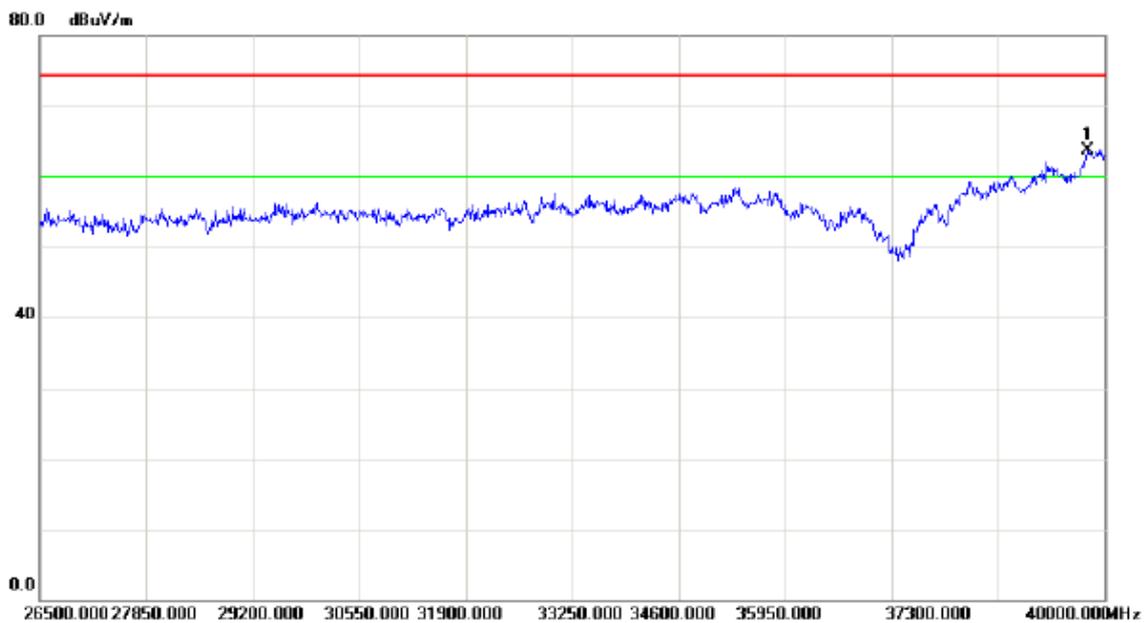

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39797.50	46.60	17.11	63.71	74.30	-10.59	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


### Horizontal

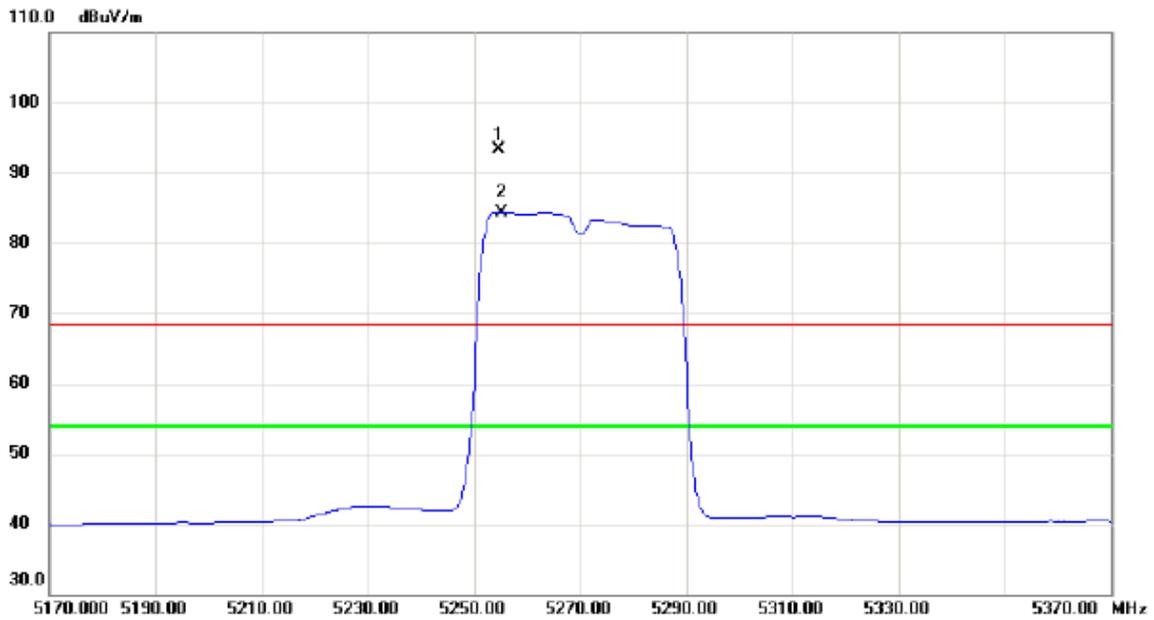


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5254.600	52.93	40.44	93.37	68.30	25.07	peak	No Limit
2	*	5255.200	43.87	40.44	84.31	54.00	30.31	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

### Horizontal

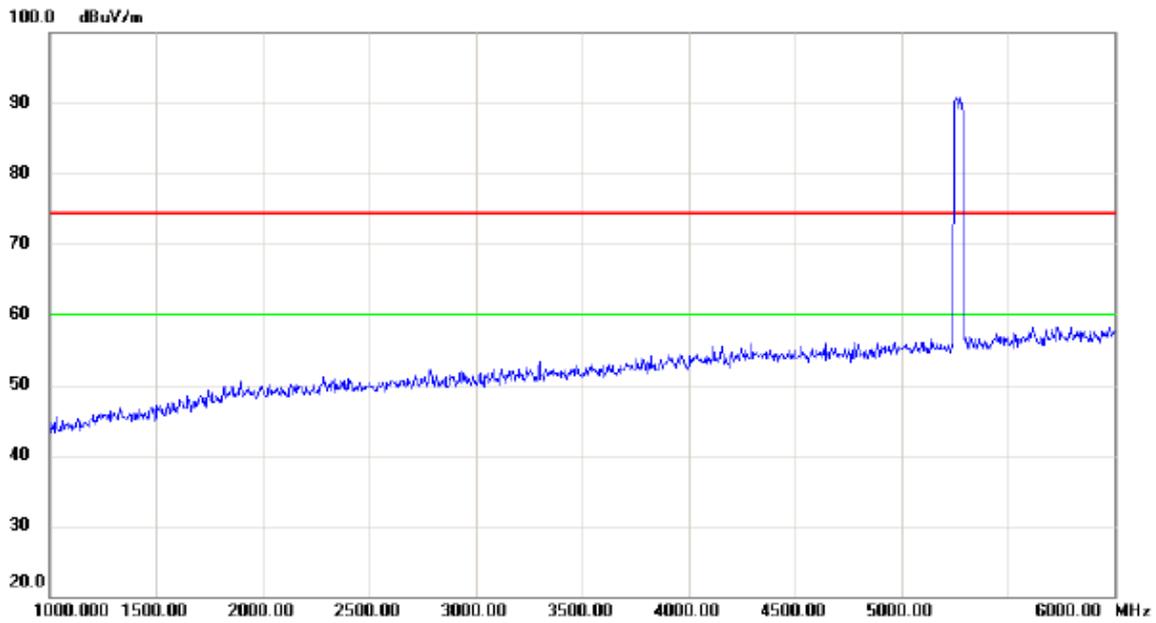


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

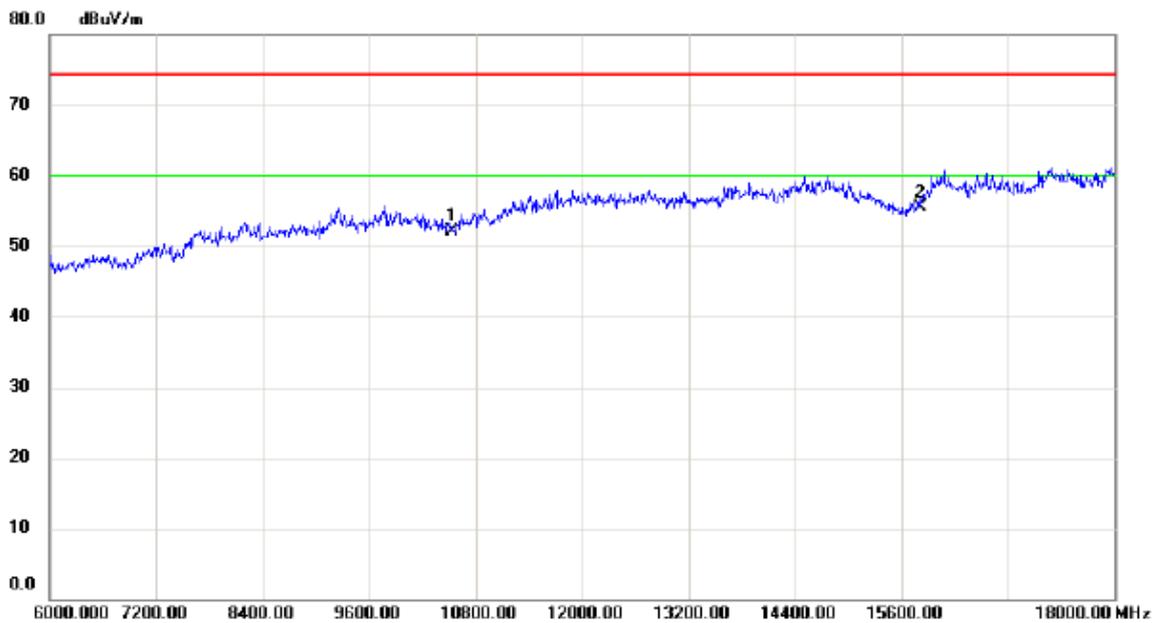


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10540.00	38.29	13.84	52.13	74.30	-22.17	peak	
2	*	15810.00	37.33	18.25	55.58	74.30	-18.72	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

### Horizontal

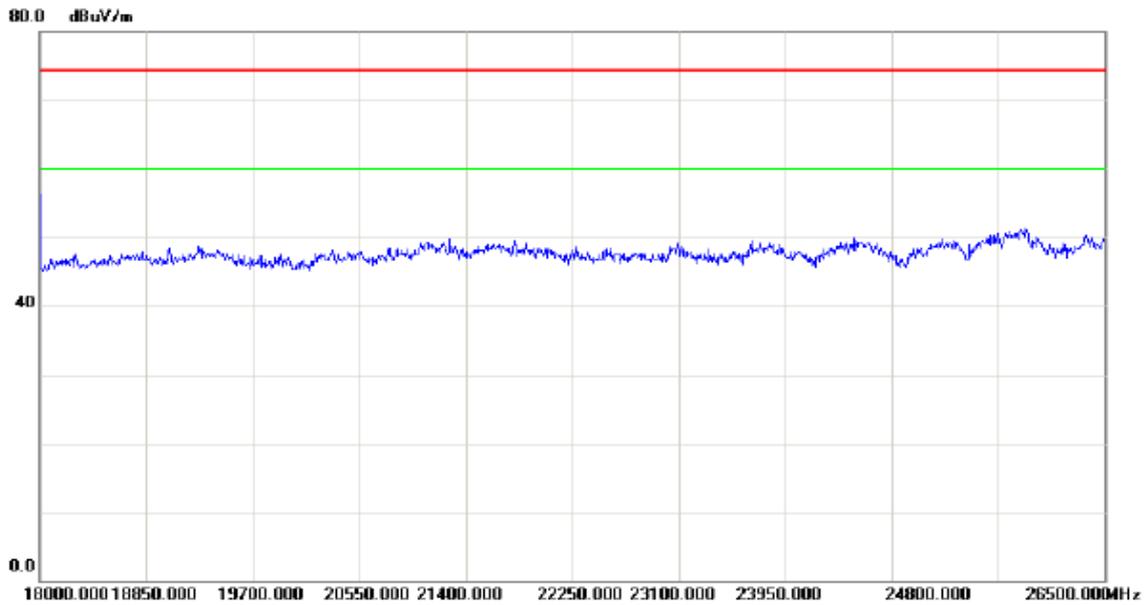


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

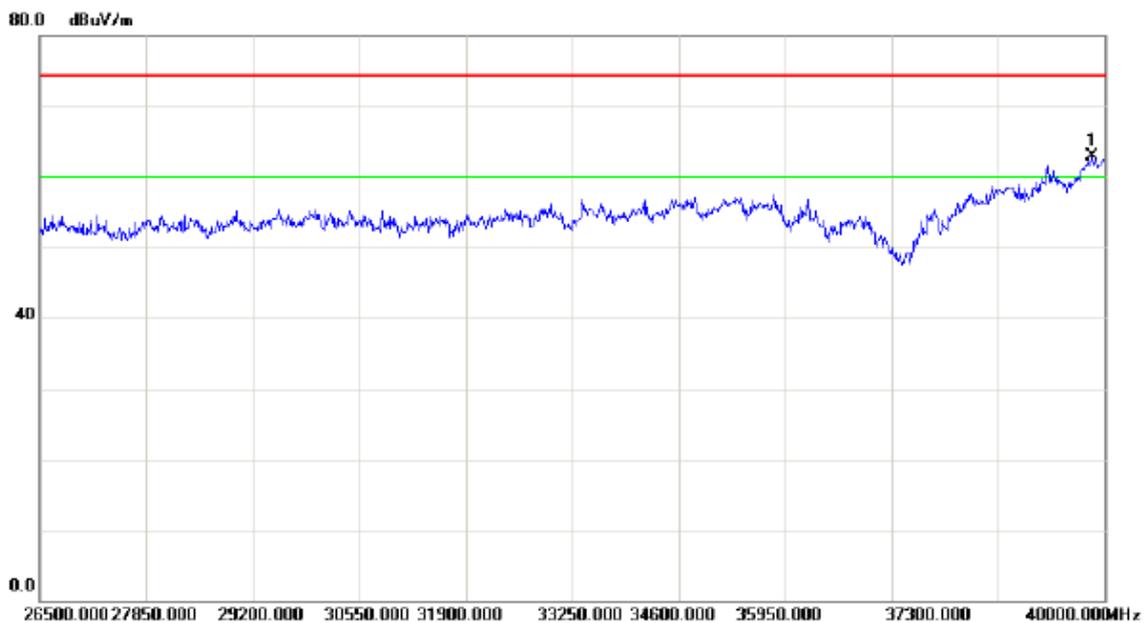

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39851.50	45.77	17.23	63.00	74.30	-11.30	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


### Vertical

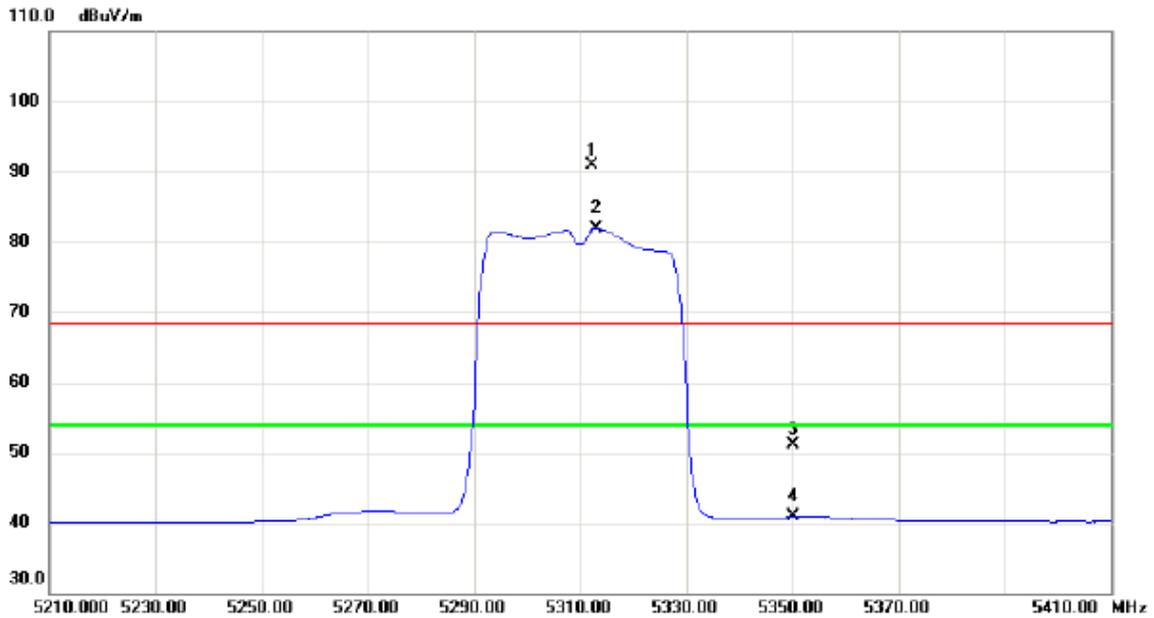


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5312.400	50.44	40.56	91.00	68.30	22.70	peak	No Limit
2	*	5313.000	41.30	40.56	81.86	54.00	27.86	AVG	No Limit
3		5350.000	10.52	40.64	51.16	68.30	-17.14	peak	
4		5350.000	0.20	40.64	40.84	54.00	-13.16	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

### Vertical

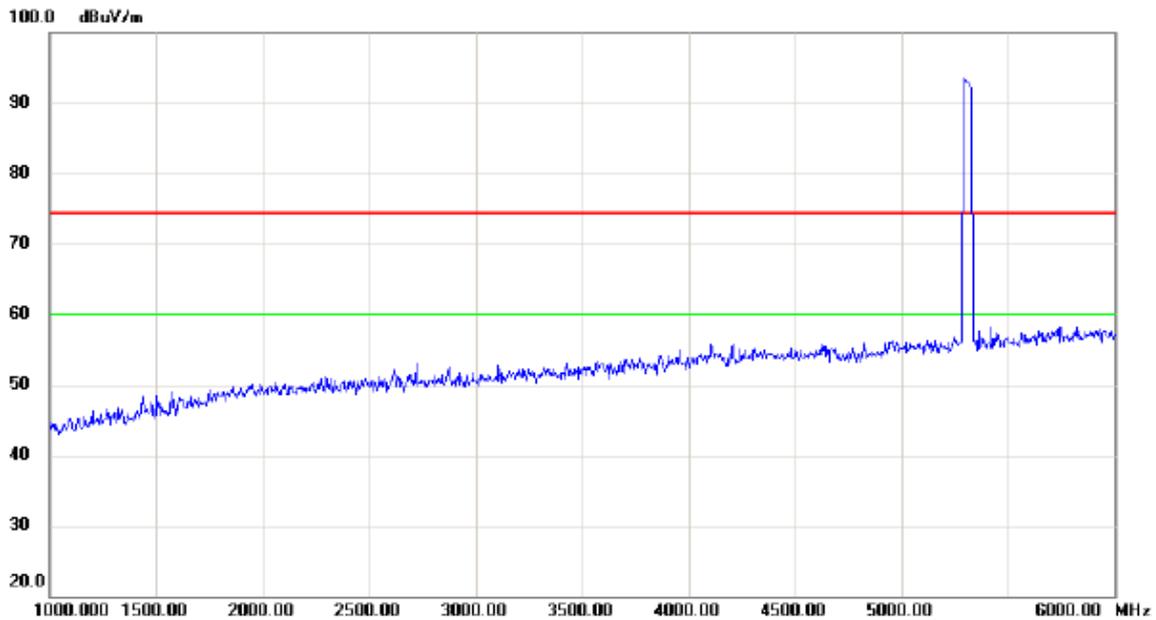


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

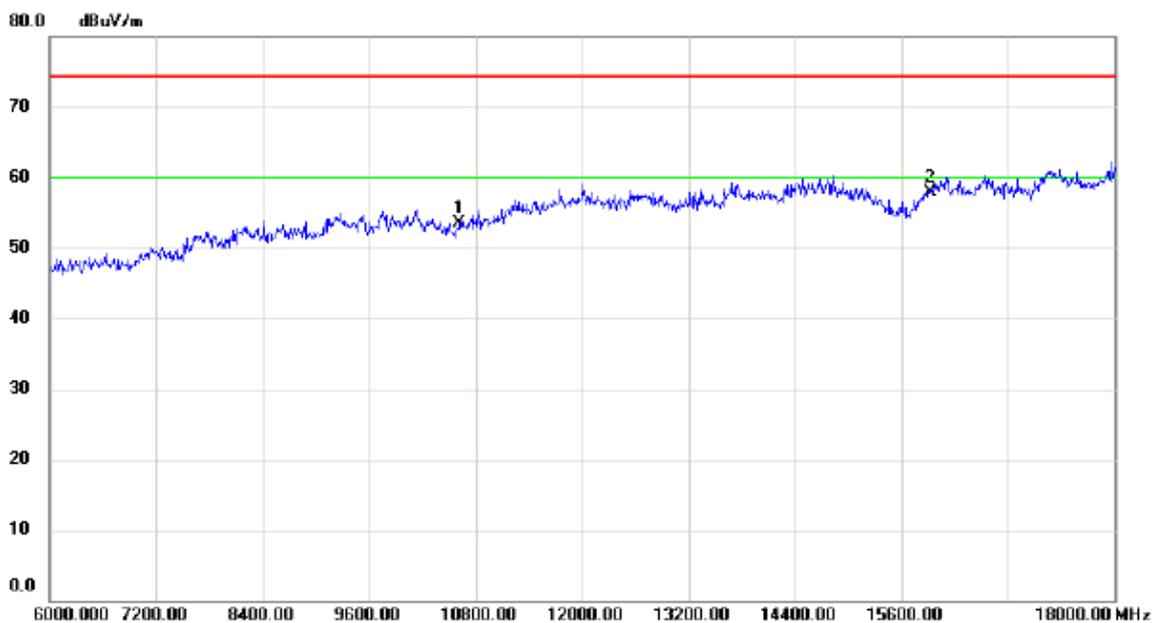


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	39.28	14.17	53.45	74.30	-20.85	peak	
2	*	15930.00	39.02	18.89	57.91	74.30	-16.39	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

### Vertical

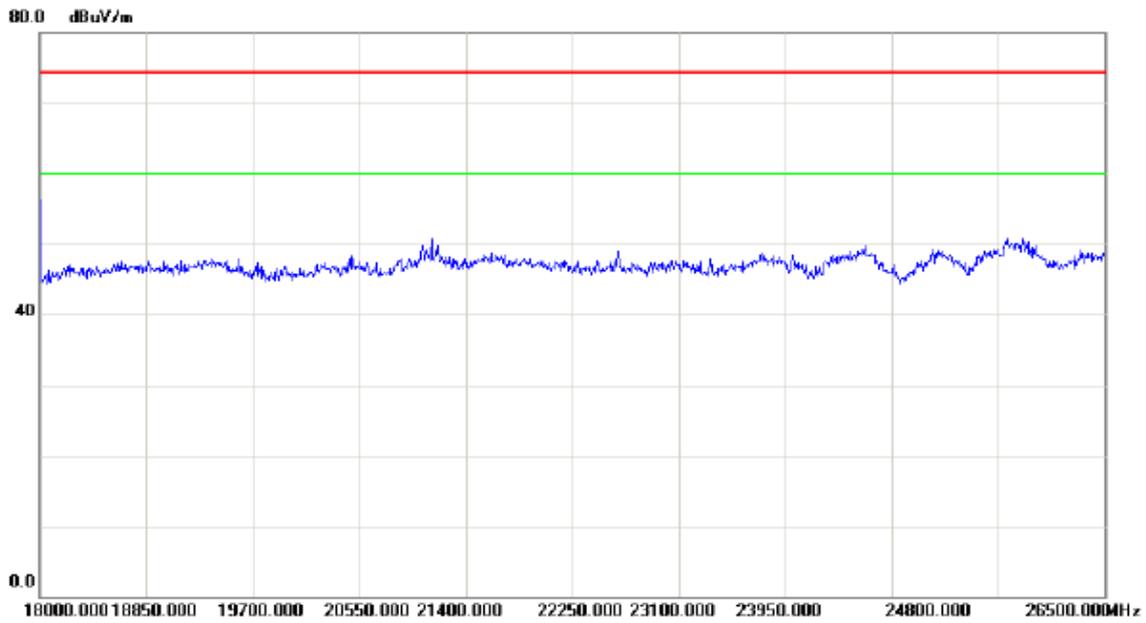


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

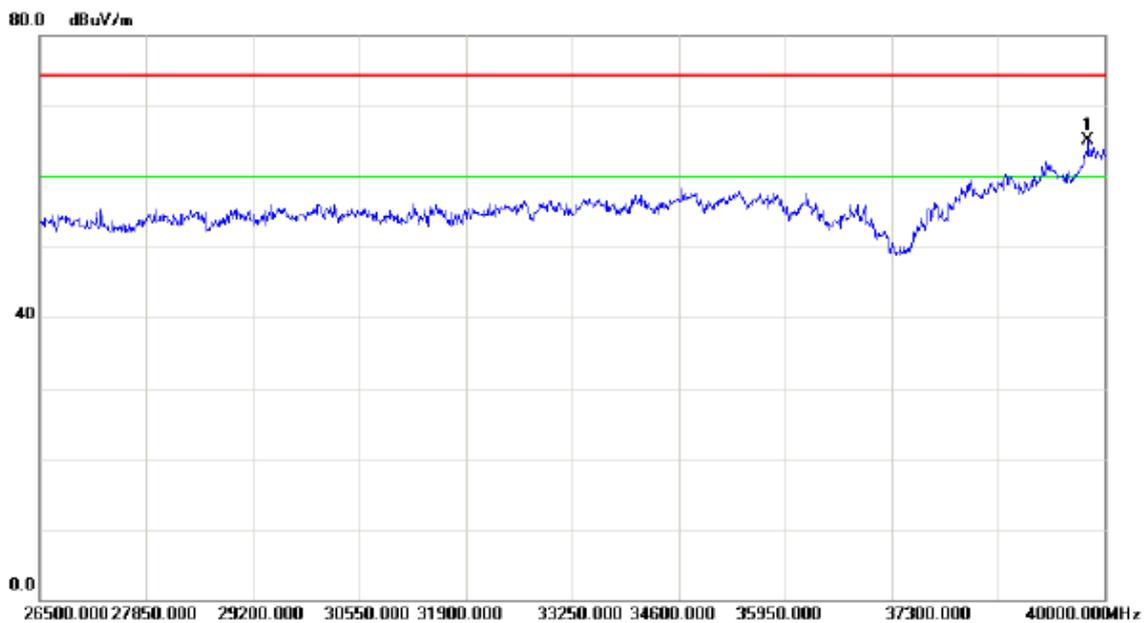

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39797.50	48.00	17.11	65.11	74.30	-9.19	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


### Horizontal

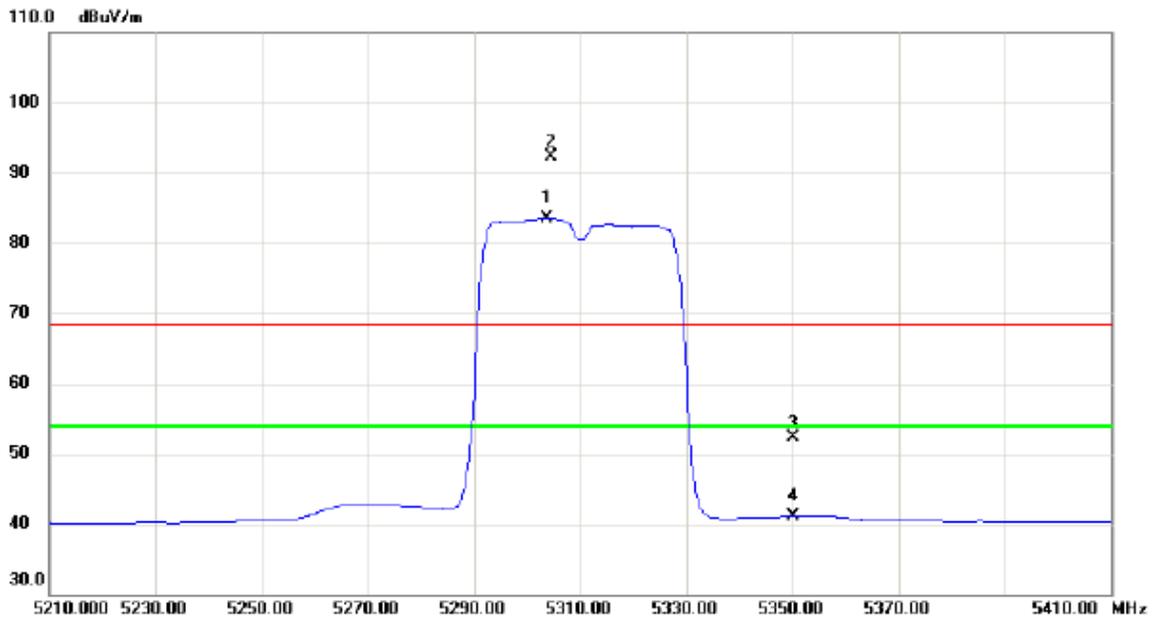


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5303.800	42.99	40.54	83.53	54.00	29.53	AVG	No Limit
2	X	5304.600	51.73	40.54	92.27	68.30	23.97	peak	No Limit
3		5350.000	11.58	40.64	52.22	68.30	-16.08	peak	
4		5350.000	0.46	40.64	41.10	54.00	-12.90	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

### Horizontal

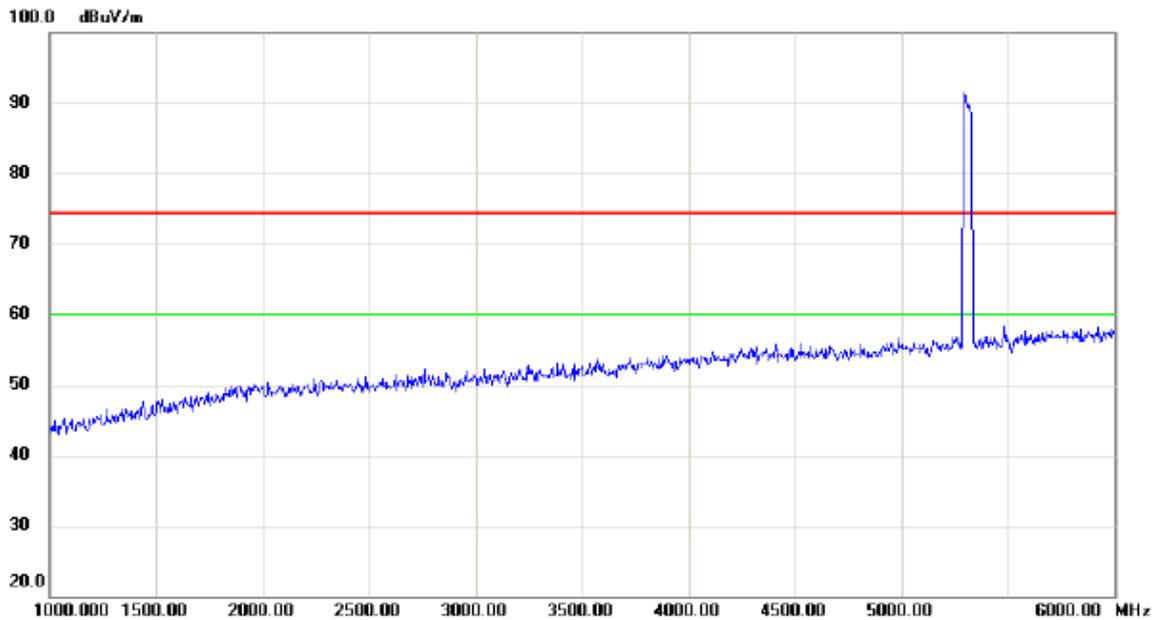


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

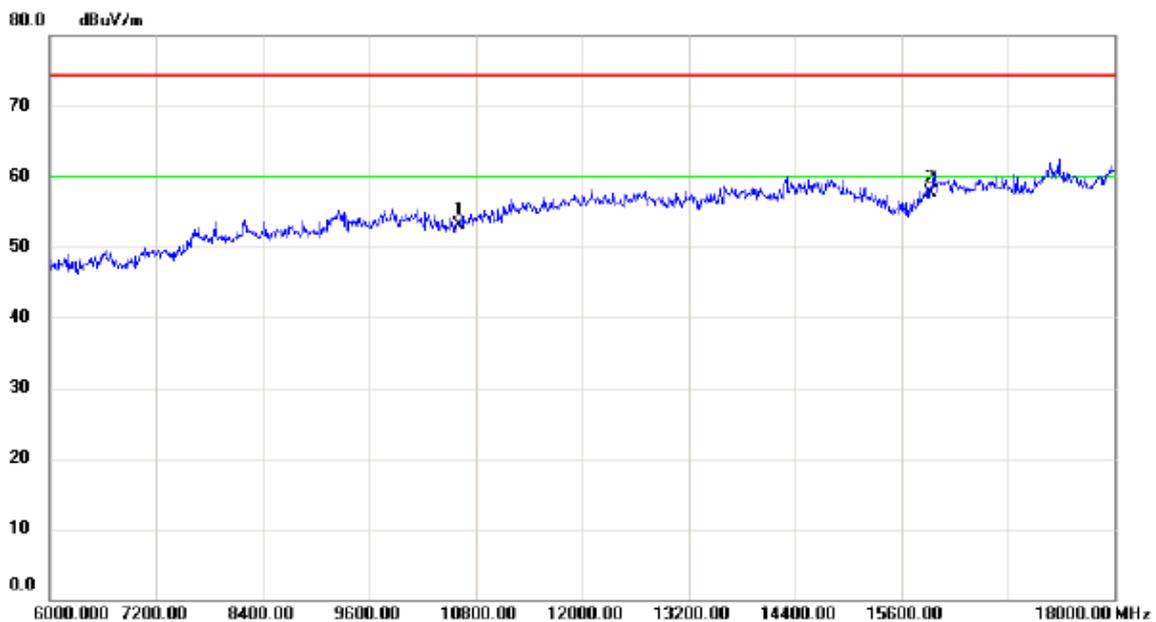


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	39.01	14.17	53.18	74.30	-21.12	peak	
2	*	15930.00	38.77	18.89	57.66	74.30	-16.64	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

### Horizontal

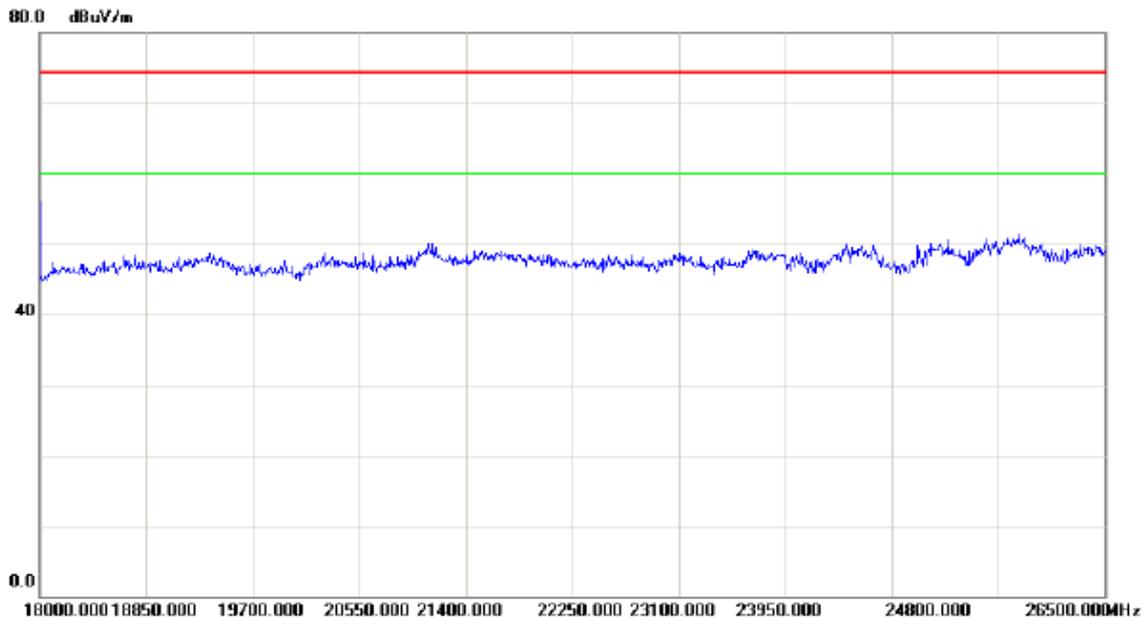


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

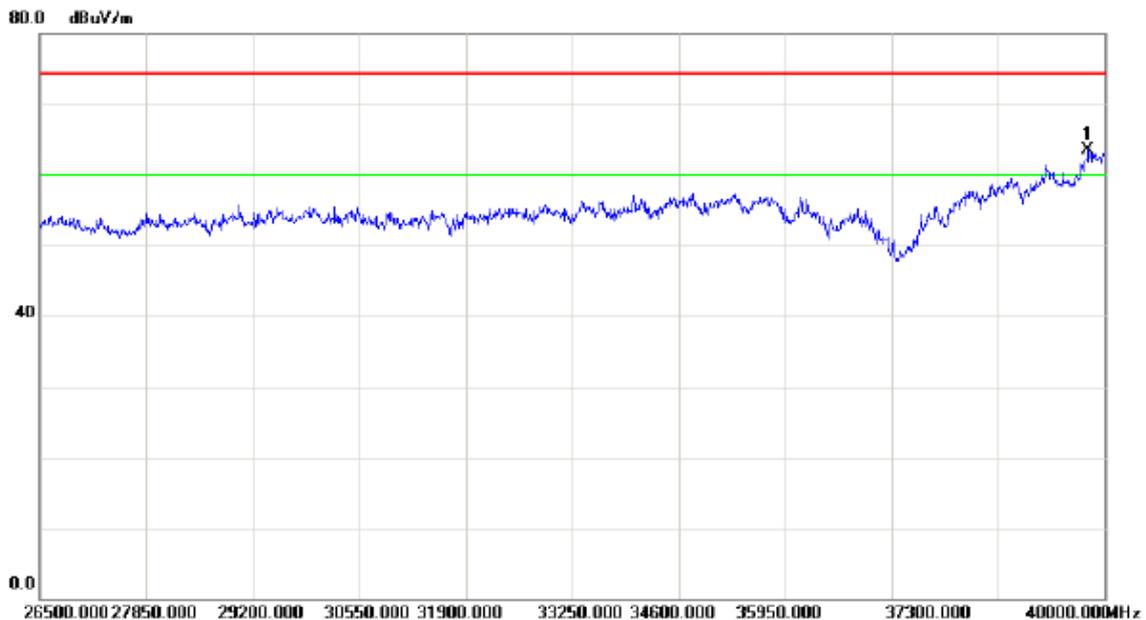

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39797.50	46.48	17.11	63.59	74.30	-10.71	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


### Vertical

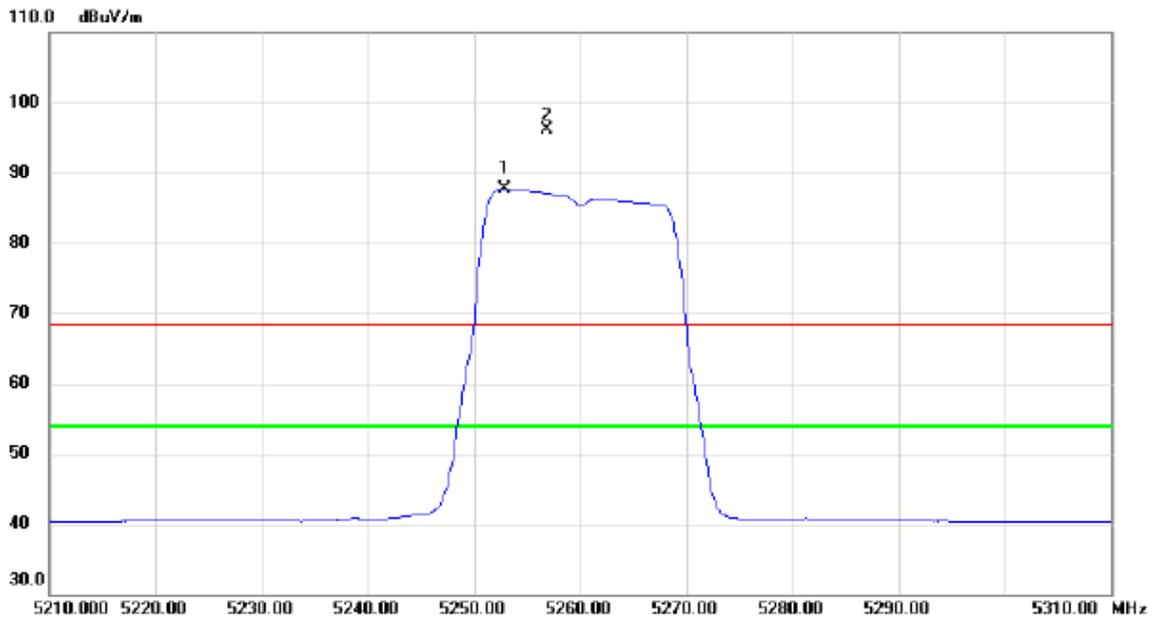


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5252.900	47.20	40.44	87.64	54.00	33.64	AVG	No Limit
2	X	5256.800	55.61	40.45	96.06	68.30	27.76	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

### Vertical

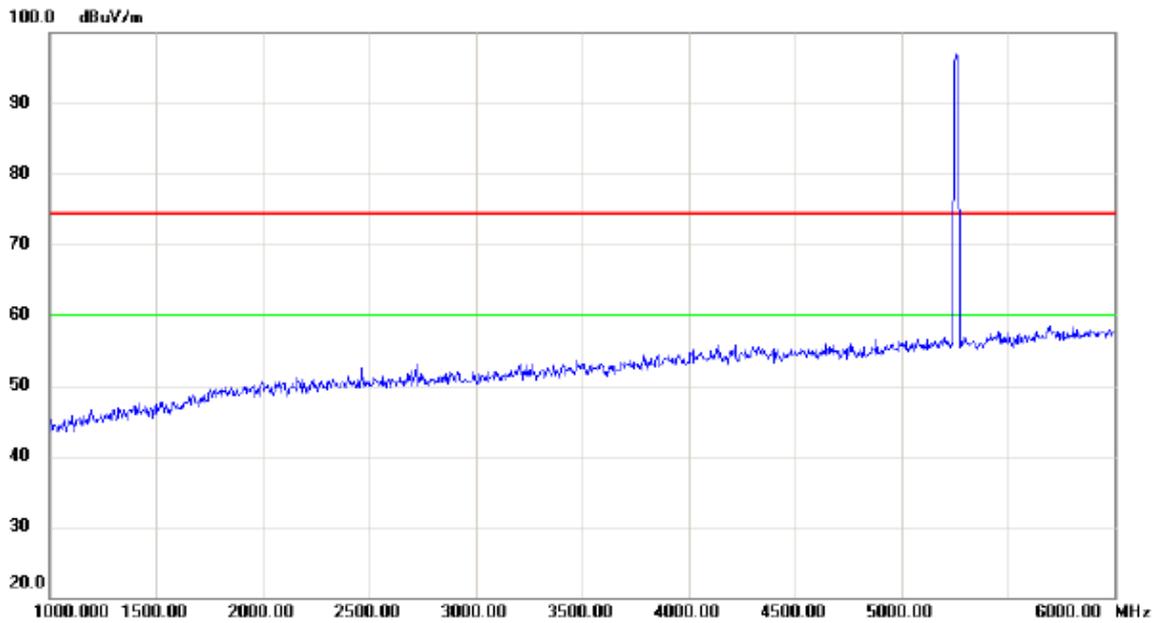


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

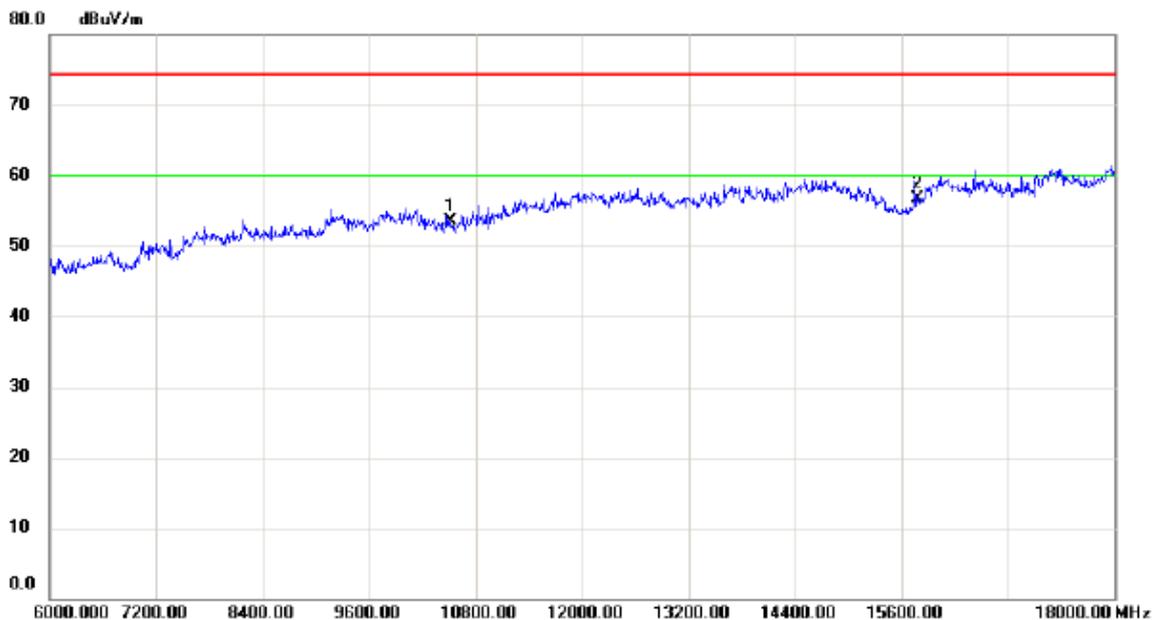


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10520.00	39.77	13.75	53.52	74.30	-20.78	peak	
2	*	15780.00	38.64	18.10	56.74	74.30	-17.56	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

### Vertical

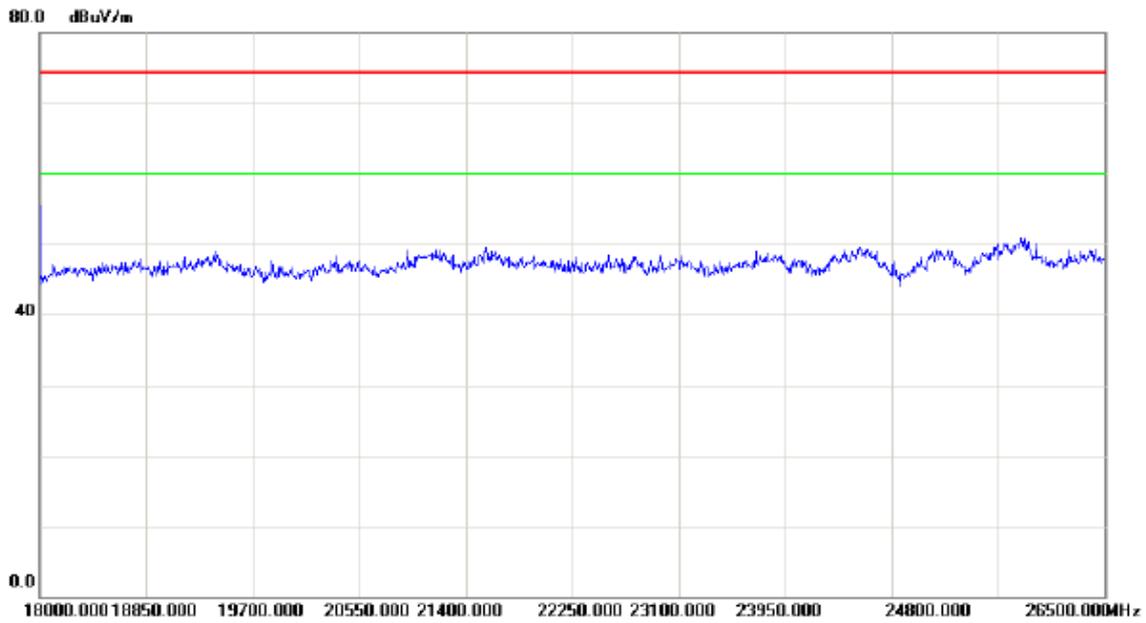


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

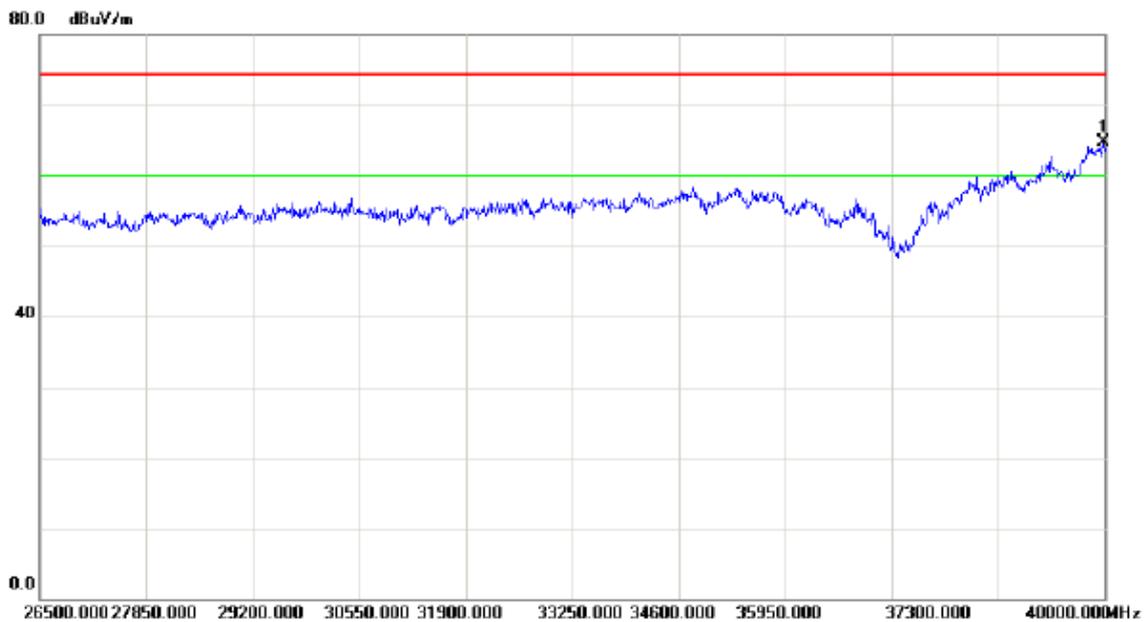

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39986.50	47.05	17.56	64.61	74.30	-9.69	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


### Horizontal

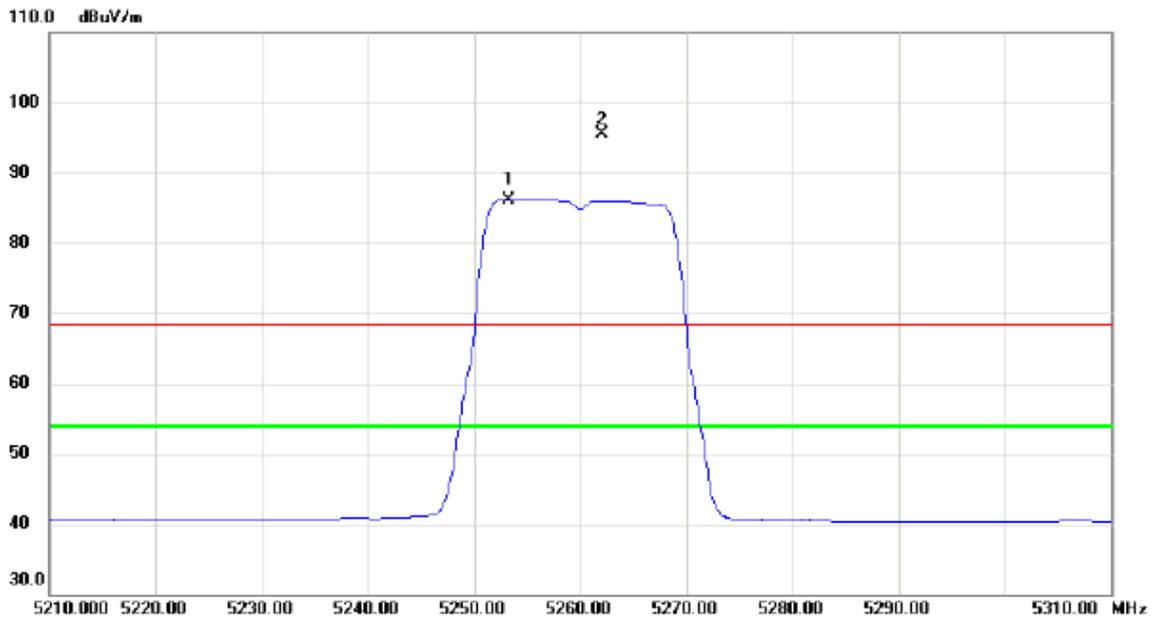


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5253.300	45.71	40.44	86.15	54.00	32.15	AVG	No Limit
2	X	5262.000	55.01	40.46	95.47	68.30	27.17	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

### Horizontal

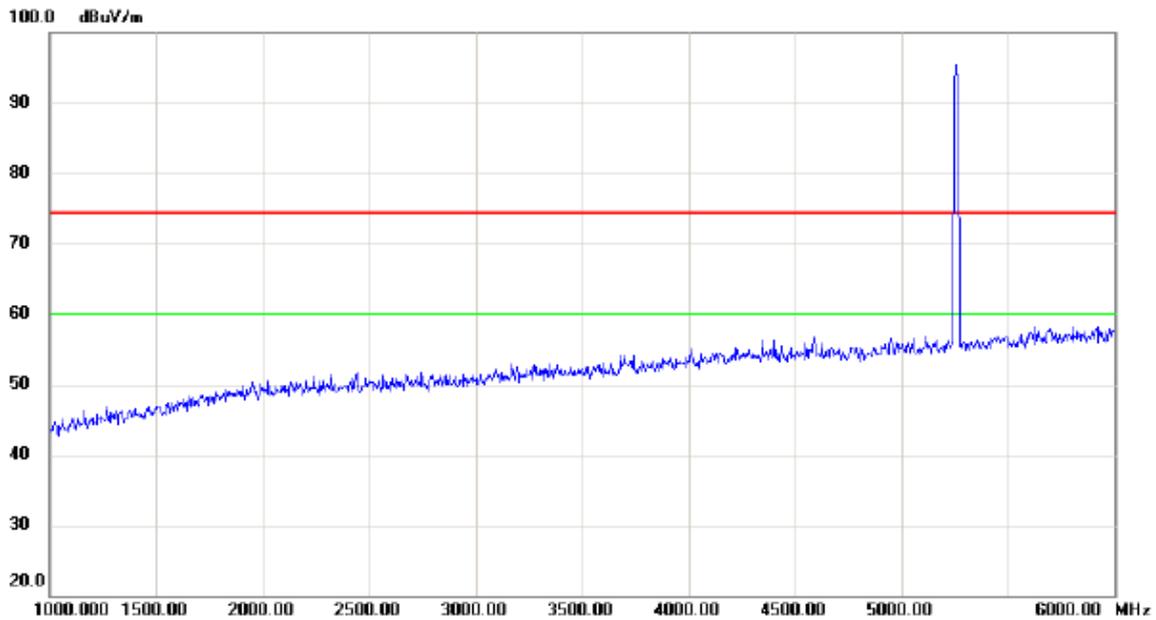


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

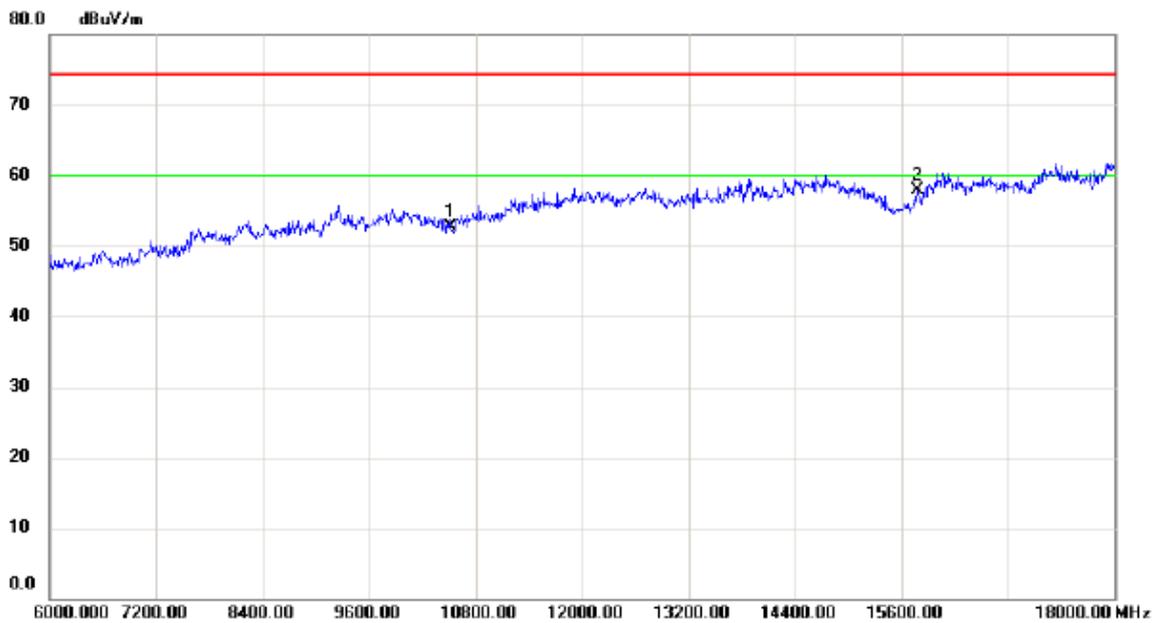


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	10520.00	38.93	13.75	52.68	74.30	-21.62	peak	
2 *	15780.00	39.79	18.10	57.89	74.30	-16.41	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

### Horizontal

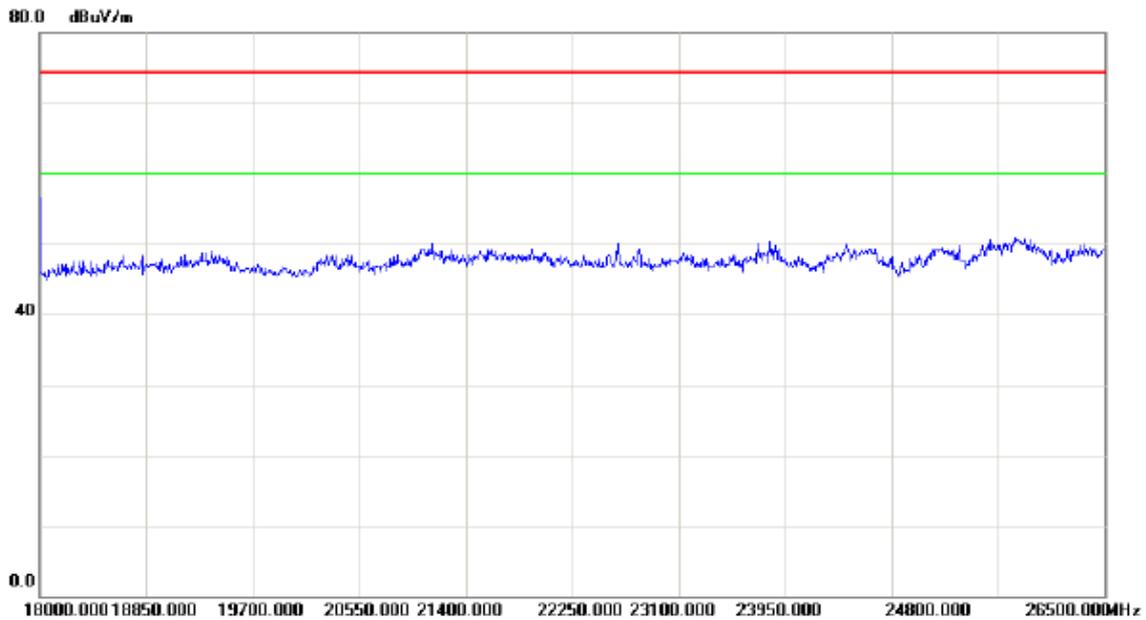


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

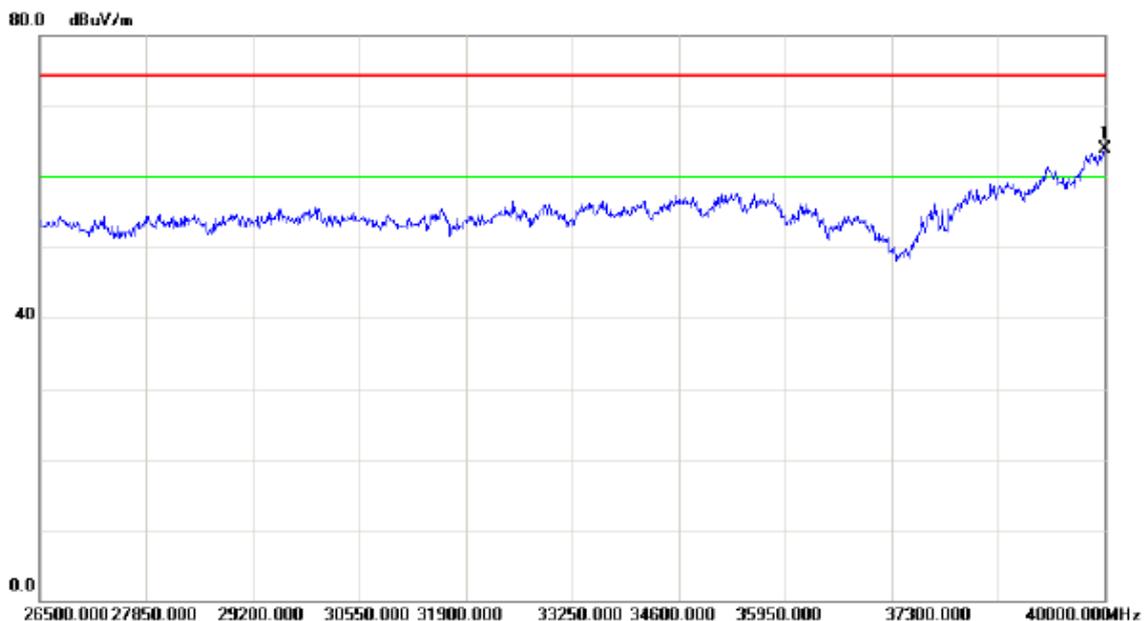

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	40000.00	46.24	17.60	63.84	74.30	-10.46	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


### Vertical

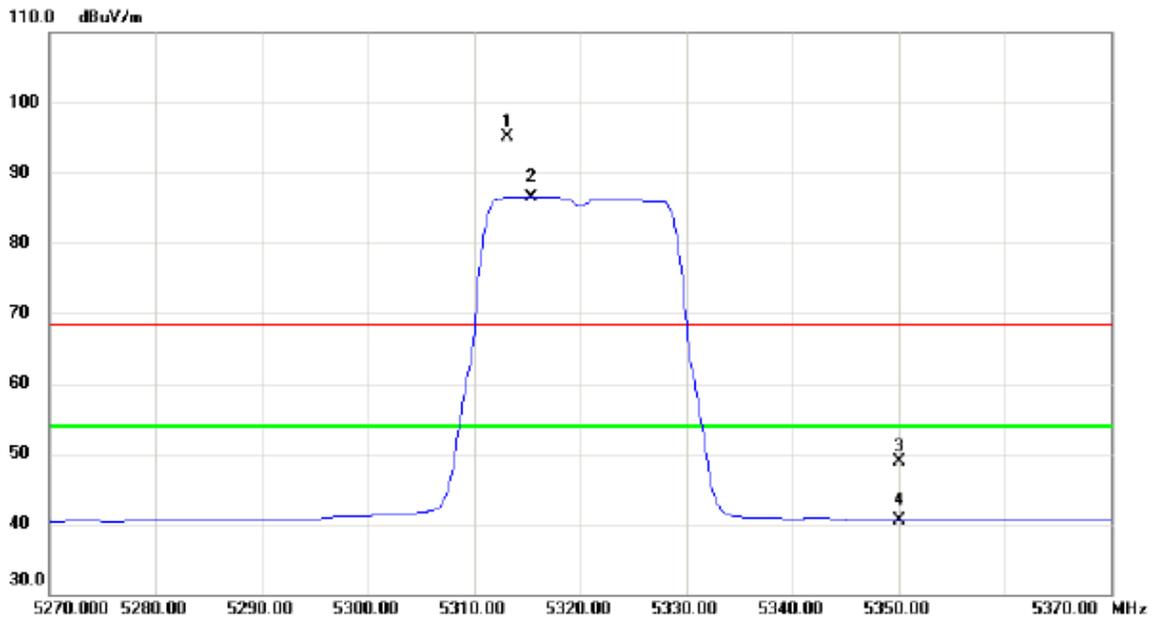


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5313.200	54.63	40.56	95.19	68.30	26.89	peak	No Limit
2	*	5315.400	45.97	40.57	86.54	54.00	32.54	AVG	No Limit
3		5350.000	8.19	40.64	48.83	68.30	-19.47	peak	
4		5350.000	-0.07	40.64	40.57	54.00	-13.43	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

### Vertical

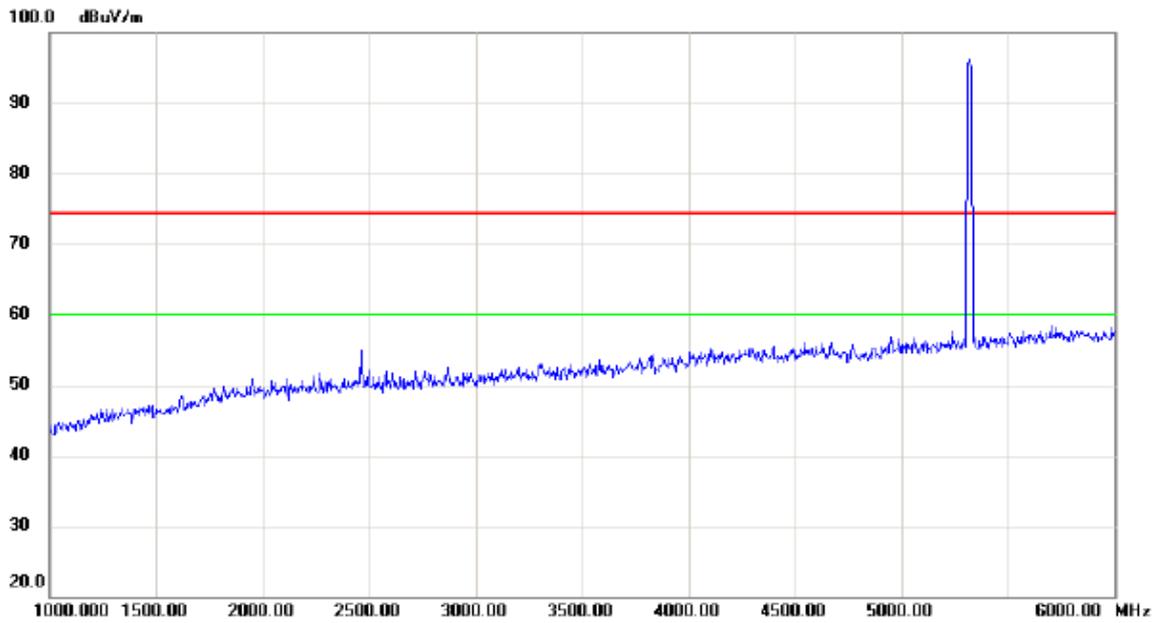


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

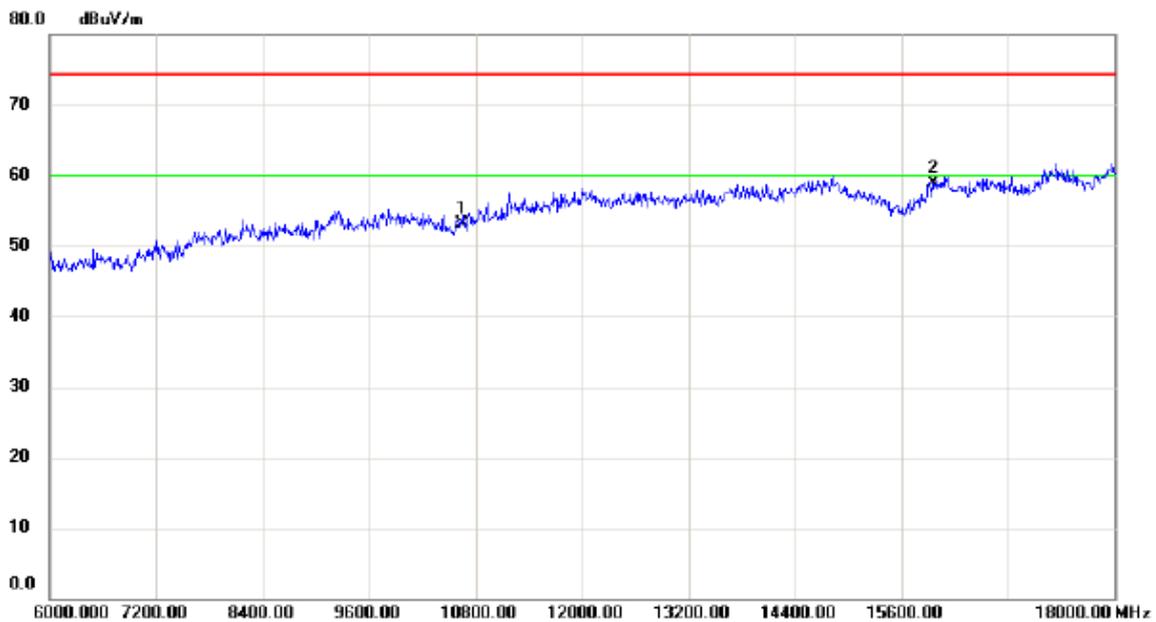


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	38.85	14.25	53.10	74.30	-21.20	peak	
2	*	15960.00	39.87	19.04	58.91	74.30	-15.39	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

### Vertical

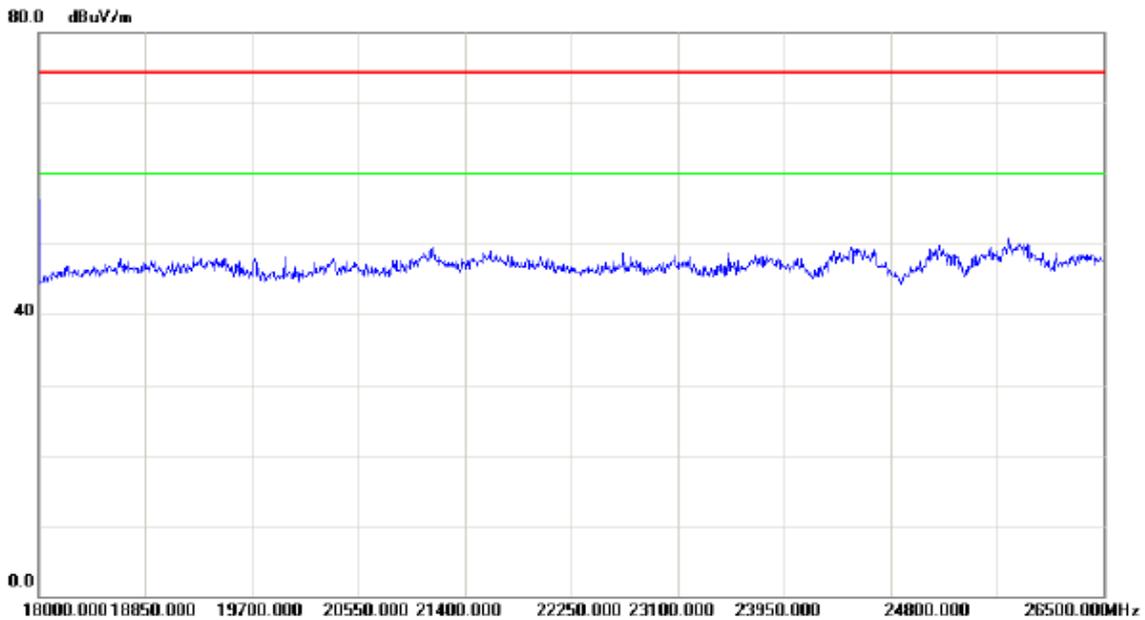


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

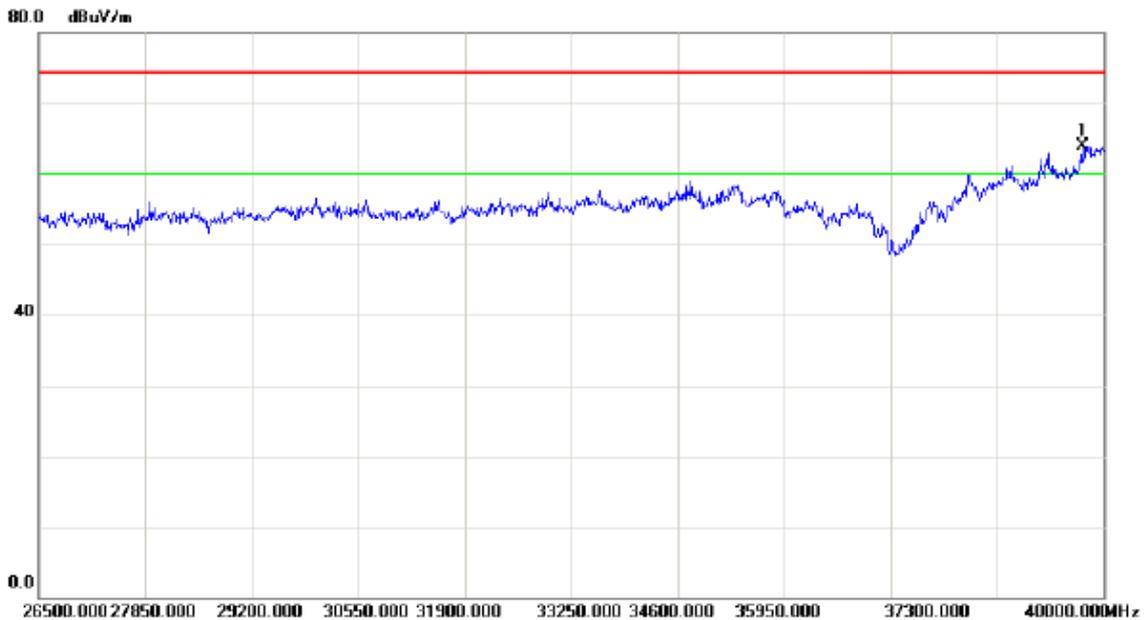

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39730.00	47.00	16.94	63.94	74.30	-10.36	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


### Horizontal

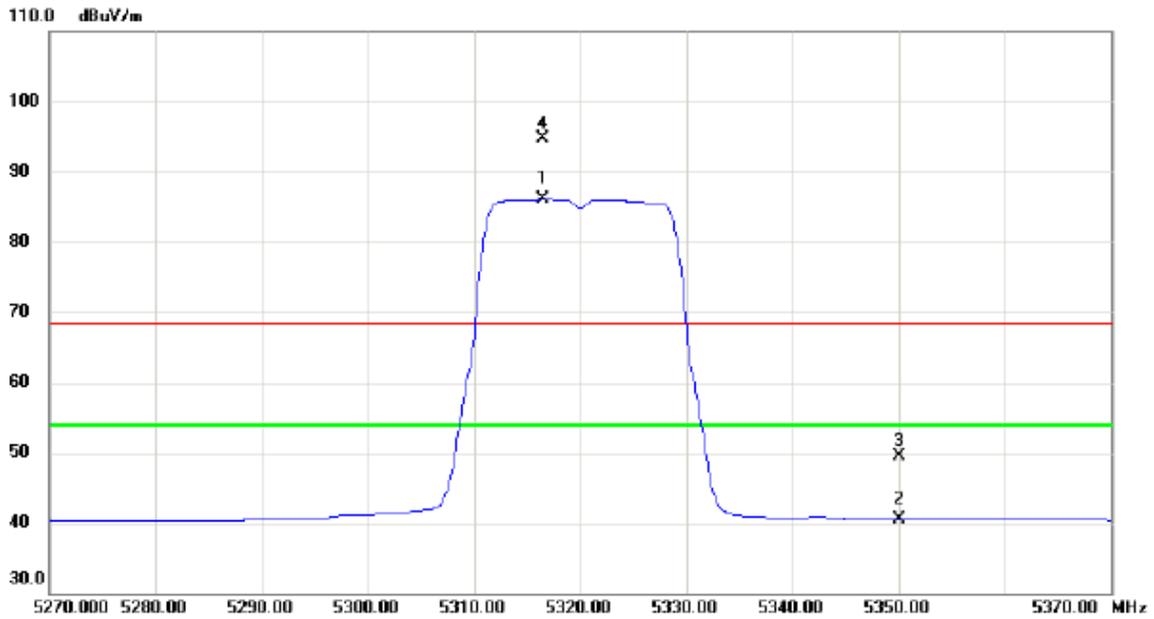


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5316.500	45.46	40.57	86.03	54.00	32.03	AVG	No Limit
2		5350.000	-0.06	40.64	40.58	54.00	-13.42	AVG	
3		5350.000	8.93	40.64	49.57	68.30	-18.73	peak	
4	X	5316.500	54.09	40.57	94.66	68.30	26.36	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

### Horizontal

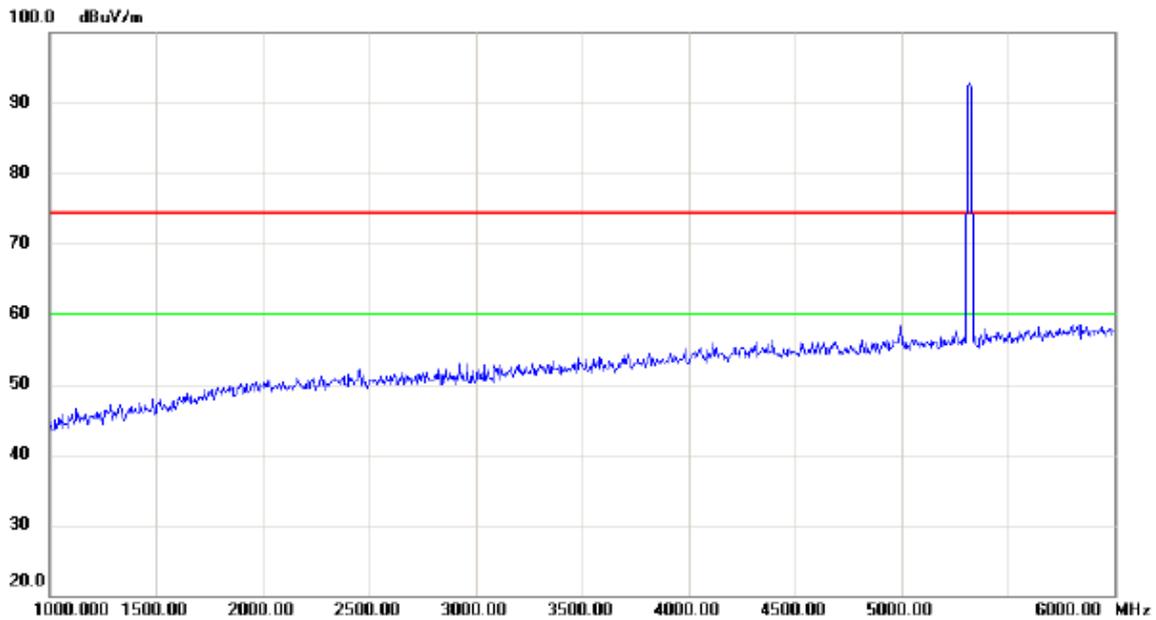


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

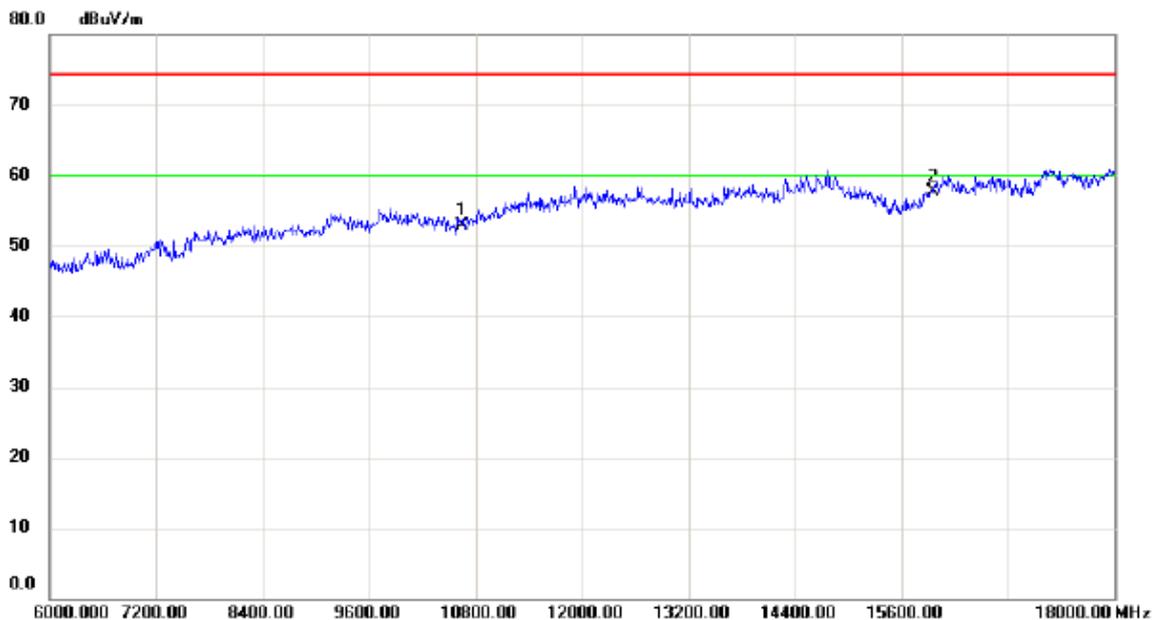


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	10640.00	38.58	14.25	52.83	74.30	-21.47	peak	
2 *	15960.00	38.59	19.04	57.63	74.30	-16.67	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

### Horizontal

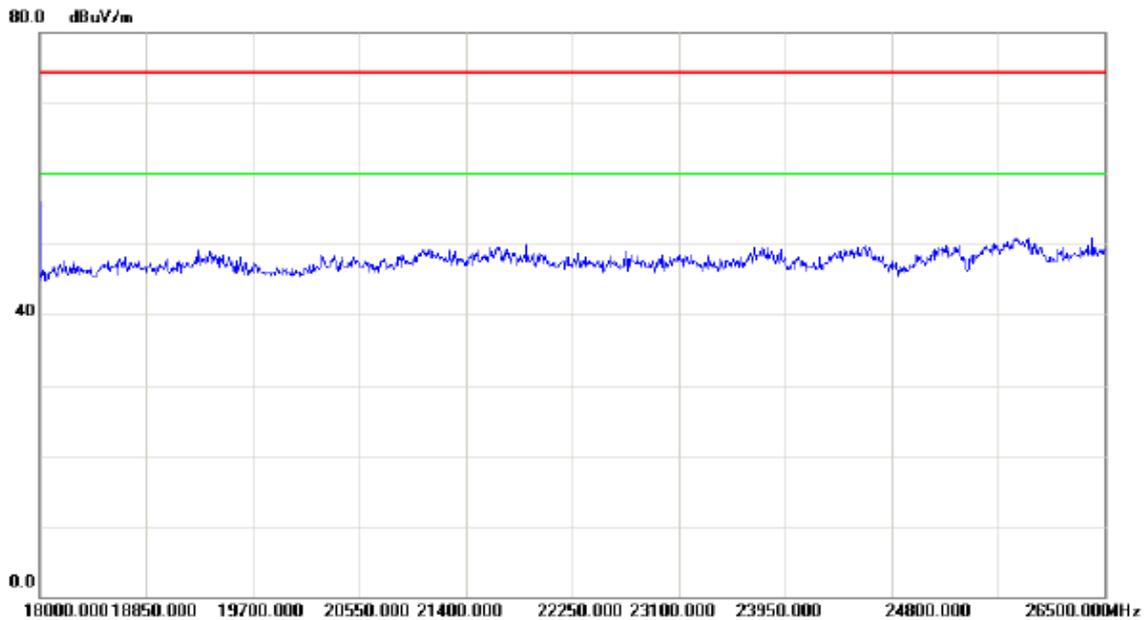


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

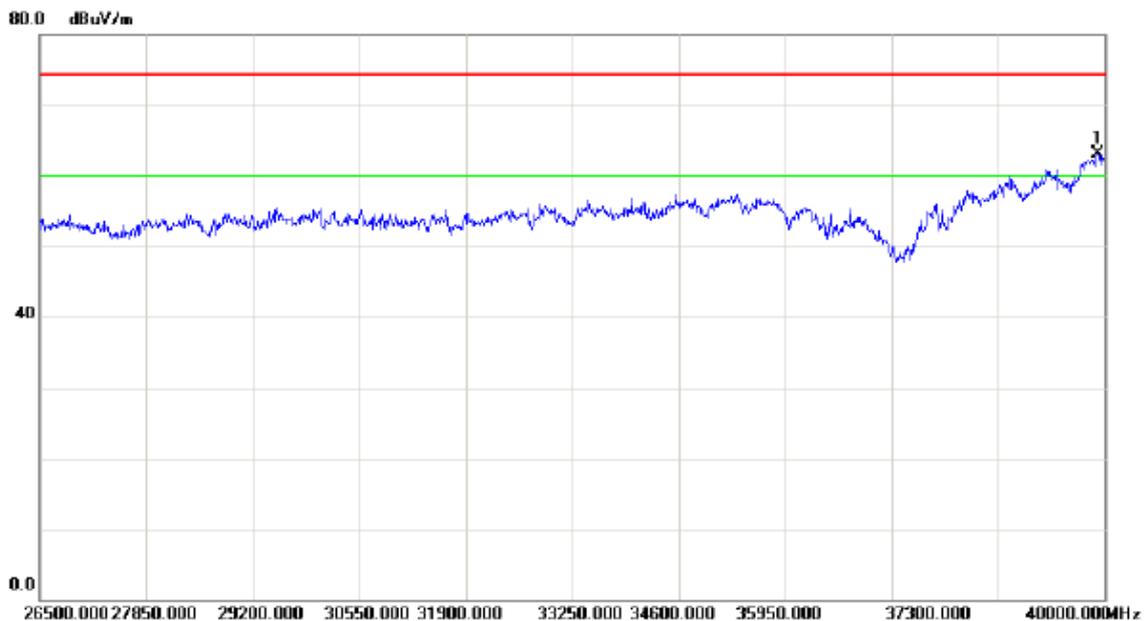

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39919.00	45.75	17.40	63.15	74.30	-11.15	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


**Vertical**

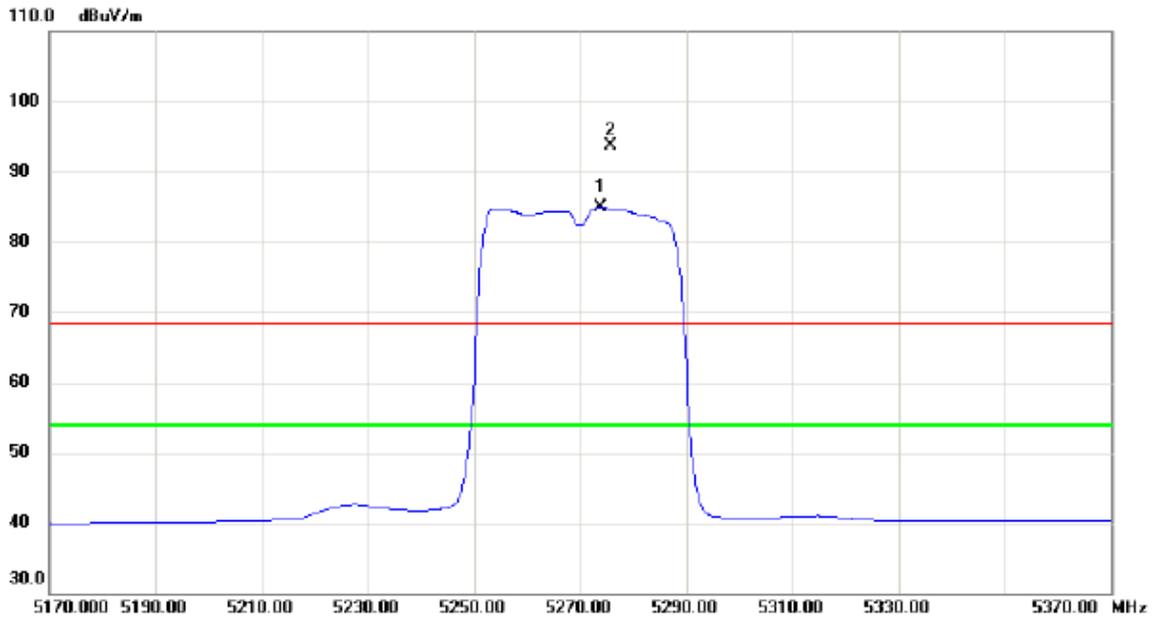


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5273.800	44.34	40.48	84.82	54.00	30.82	AVG	No Limit
2	X	5275.800	53.26	40.48	93.74	68.30	25.44	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

### Vertical

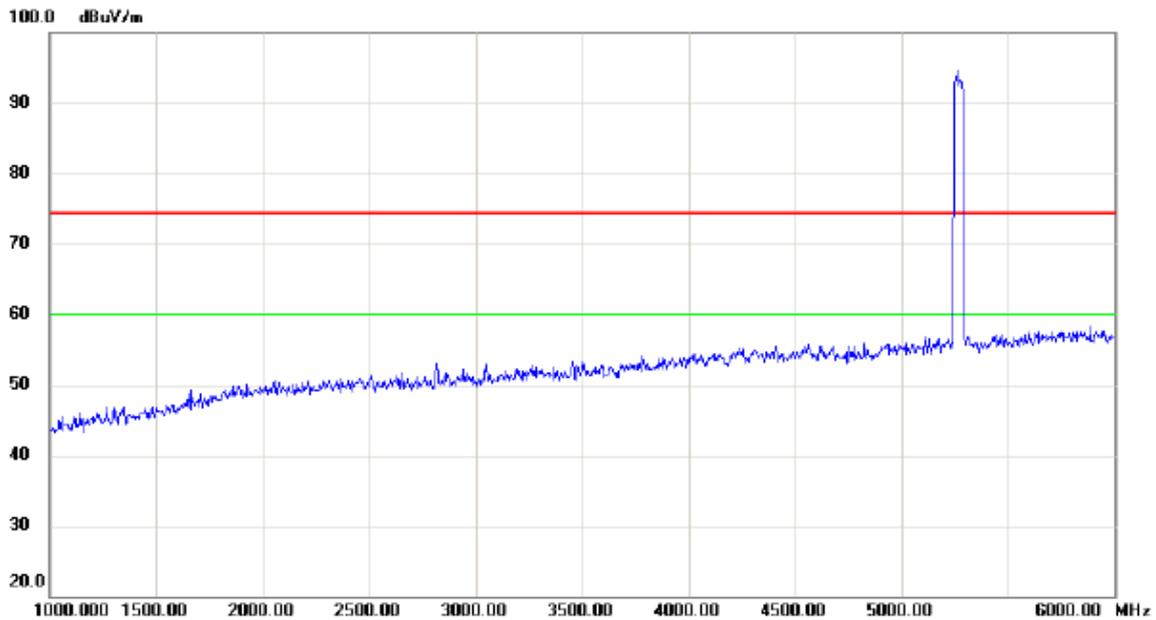


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

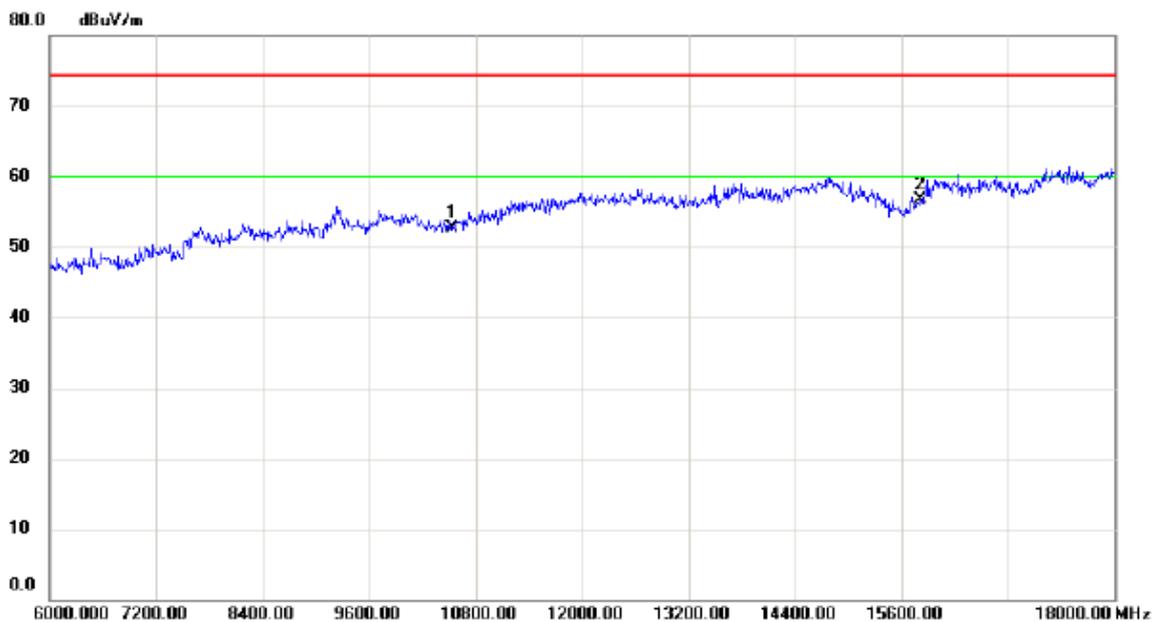


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10540.00	38.96	13.84	52.80	74.30	-21.50	peak	
2	*	15810.00	38.44	18.25	56.69	74.30	-17.61	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

### Vertical

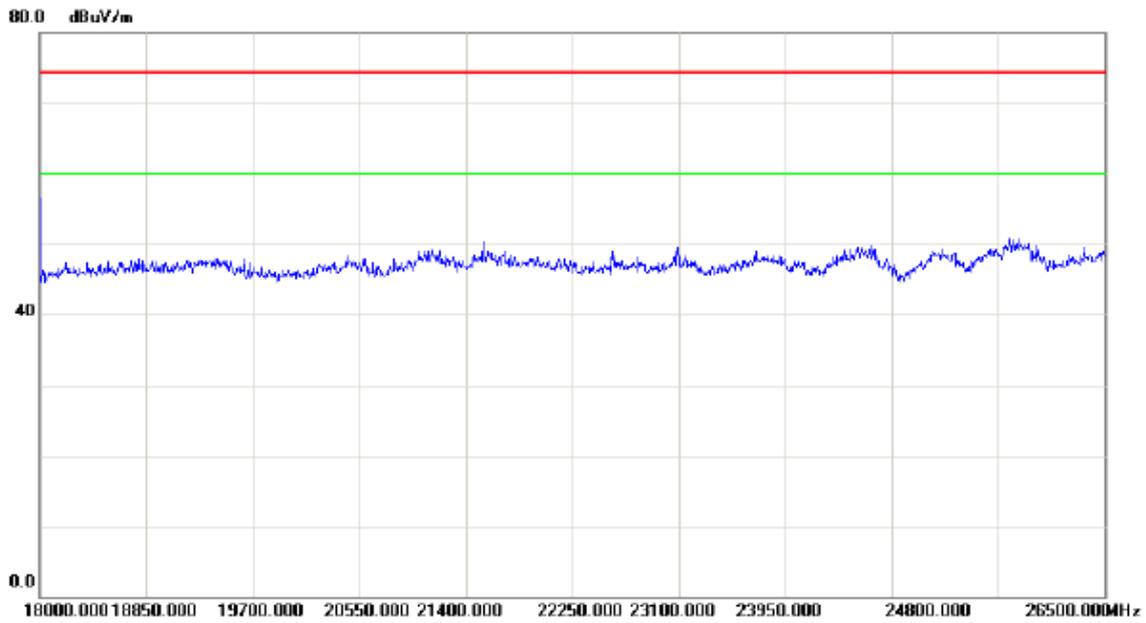


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

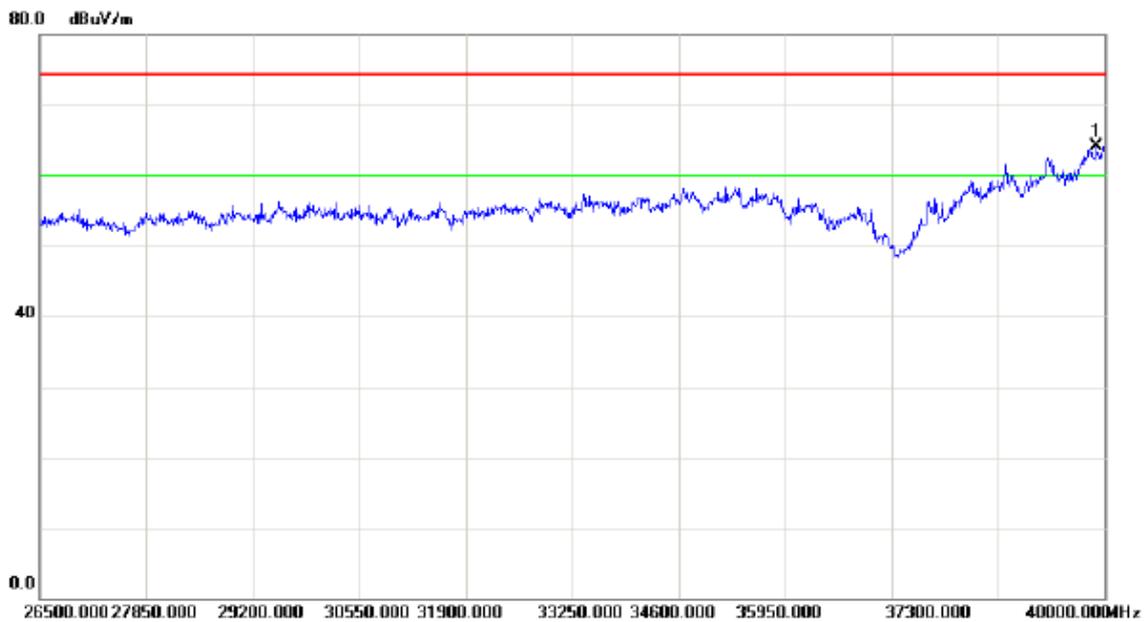

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39892.00	46.77	17.34	64.11	74.30	-10.19	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


### Horizontal

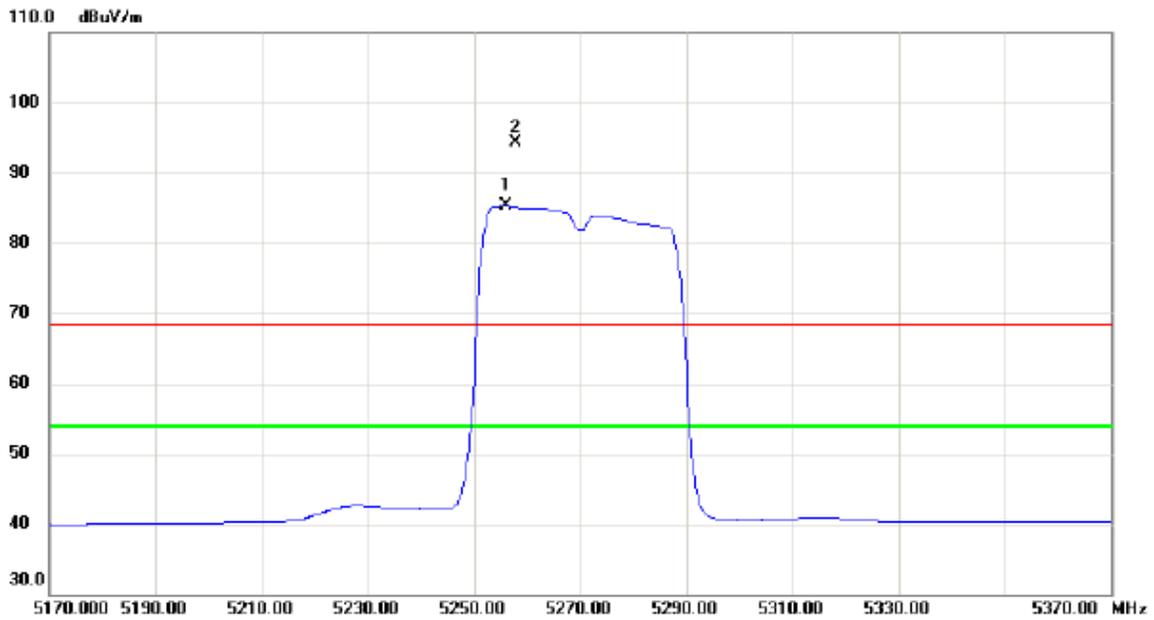


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5256.000	44.80	40.44	85.24	54.00	31.24	AVG	No Limit
2	X	5257.800	53.90	40.45	94.35	68.30	26.05	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

### Horizontal

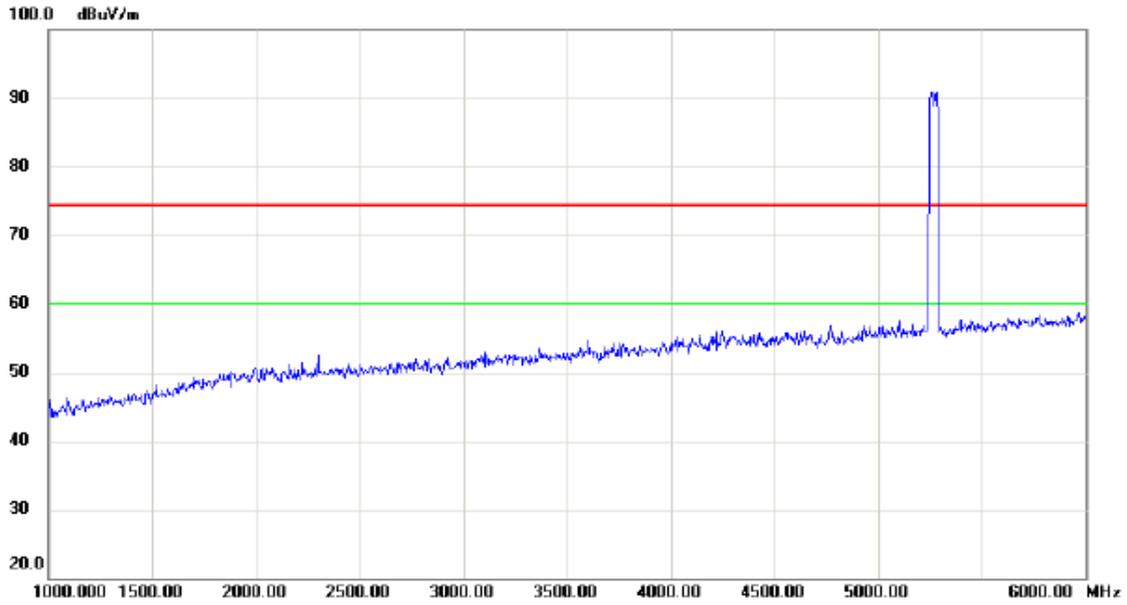


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

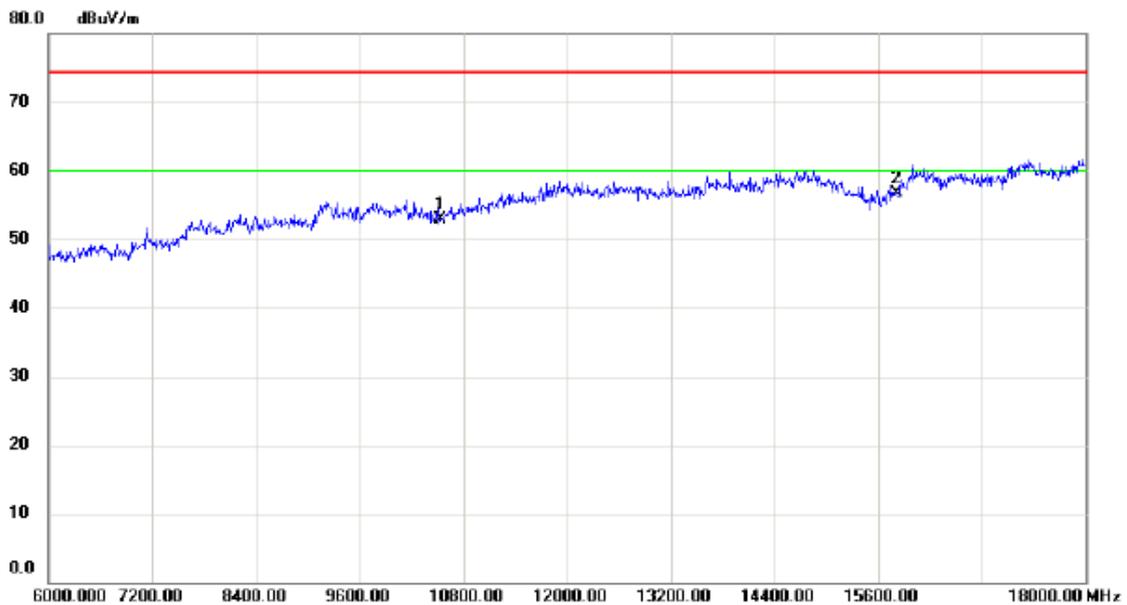


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10540.00	39.16	13.84	53.00	74.30	-21.30	peak	
2	*	15810.00	38.44	18.25	56.69	74.30	-17.61	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

### Horizontal

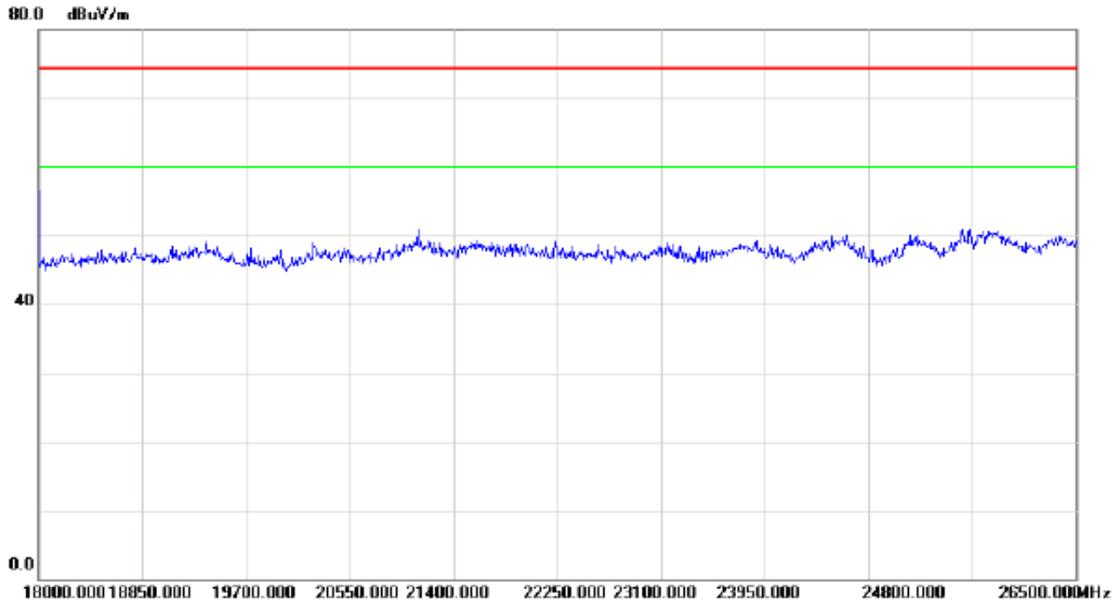


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

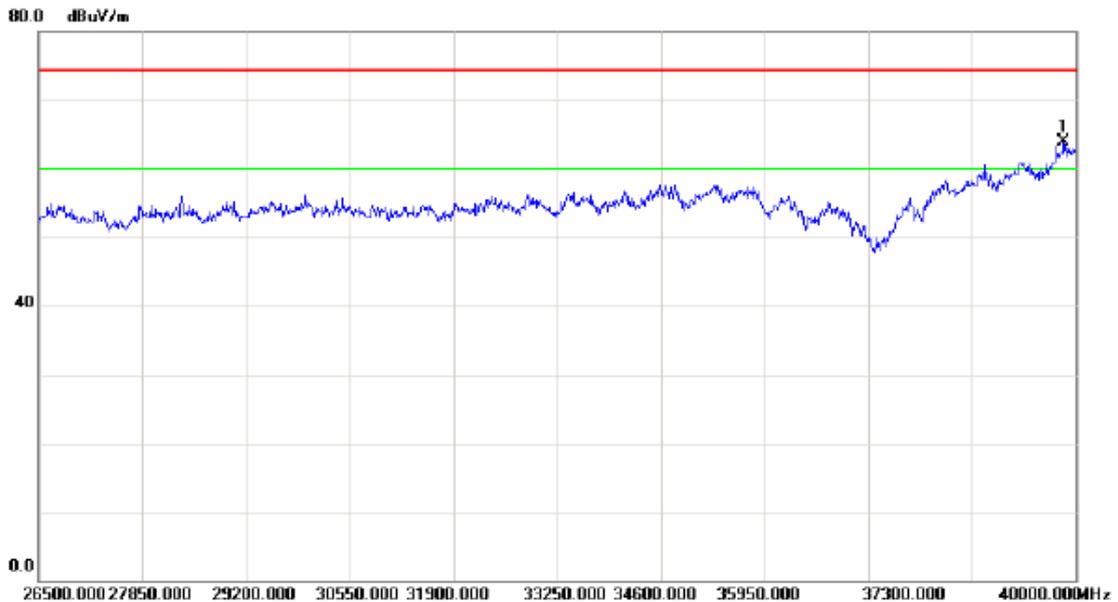

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39851.50	46.70	17.23	63.93	74.30	-10.37	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


### Vertical

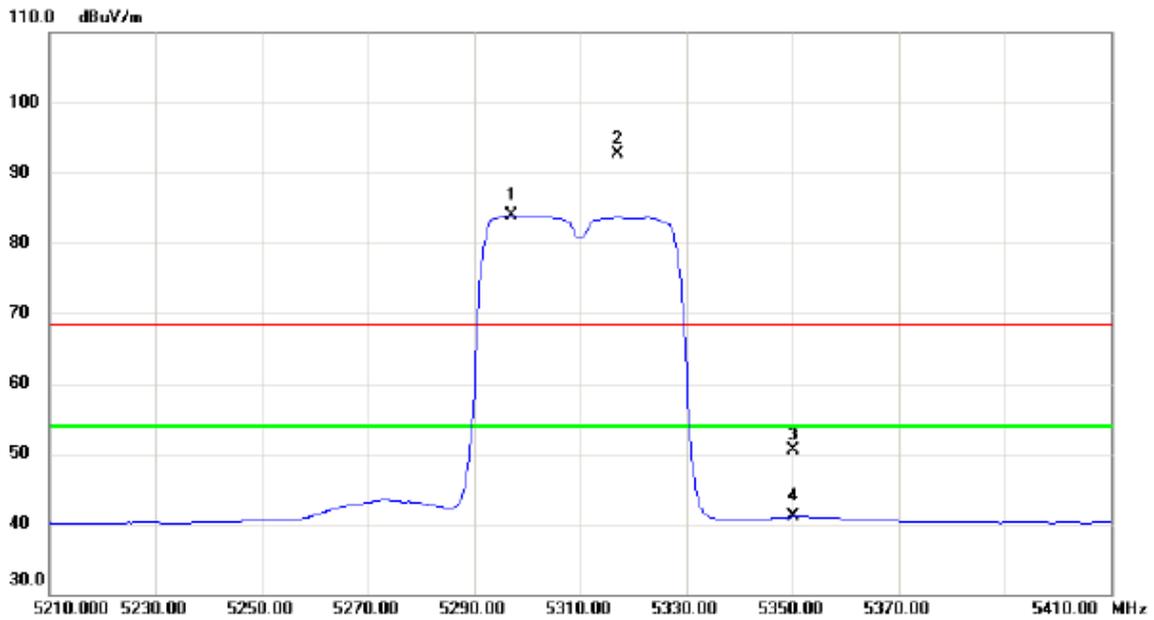


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5297.200	43.36	40.53	83.89	54.00	29.89	AVG	No Limit
2	X	5317.000	52.10	40.57	92.67	68.30	24.37	peak	No Limit
3		5350.000	9.92	40.64	50.56	68.30	-17.74	peak	
4		5350.000	0.38	40.64	41.02	54.00	-12.98	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

### Vertical

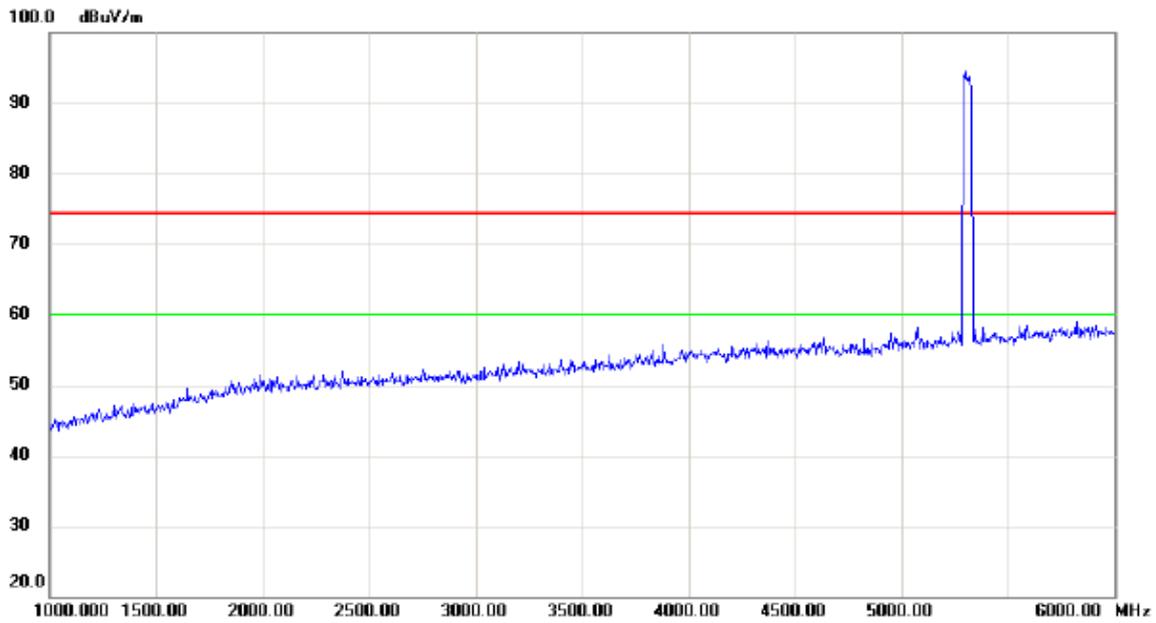


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

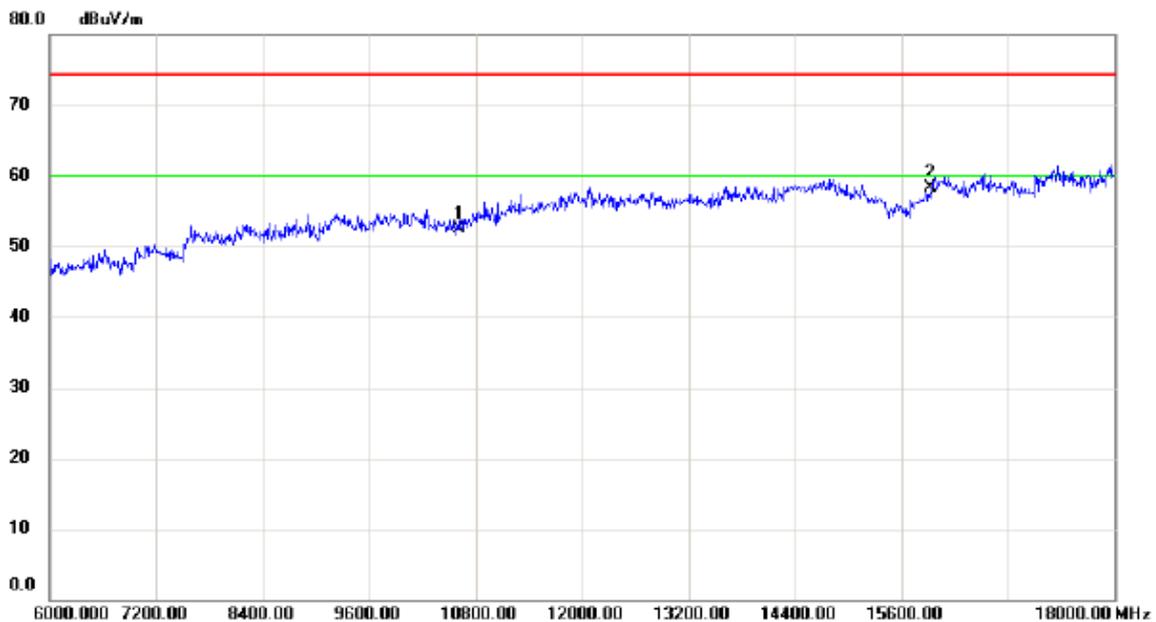


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	38.38	14.17	52.55	74.30	-21.75	peak	
2	*	15930.00	39.51	18.89	58.40	74.30	-15.90	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

### Vertical

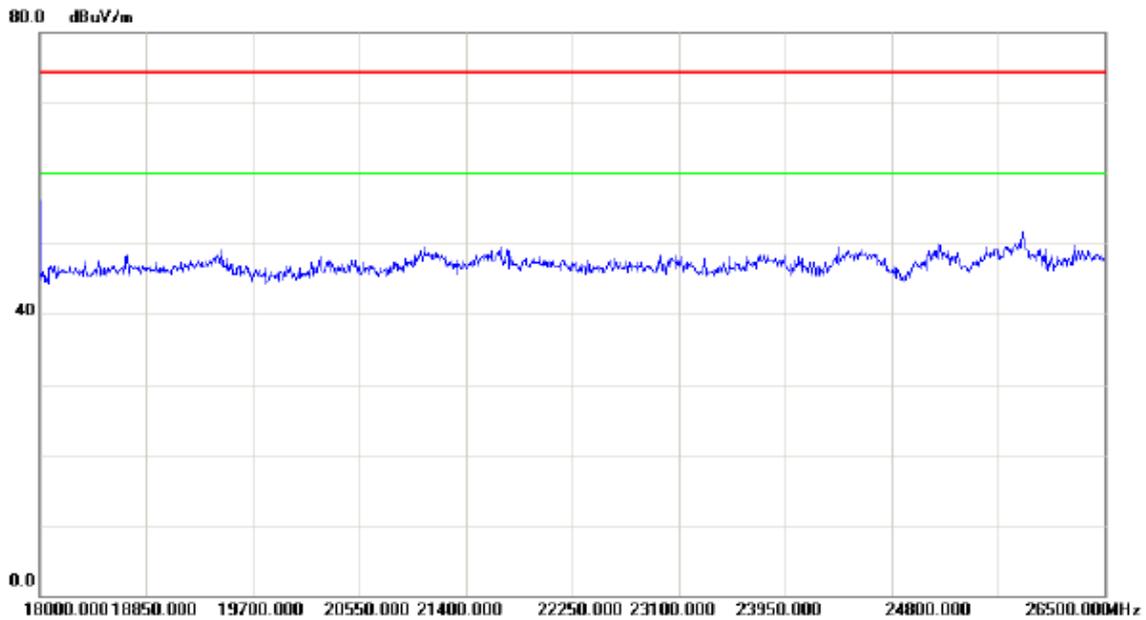


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

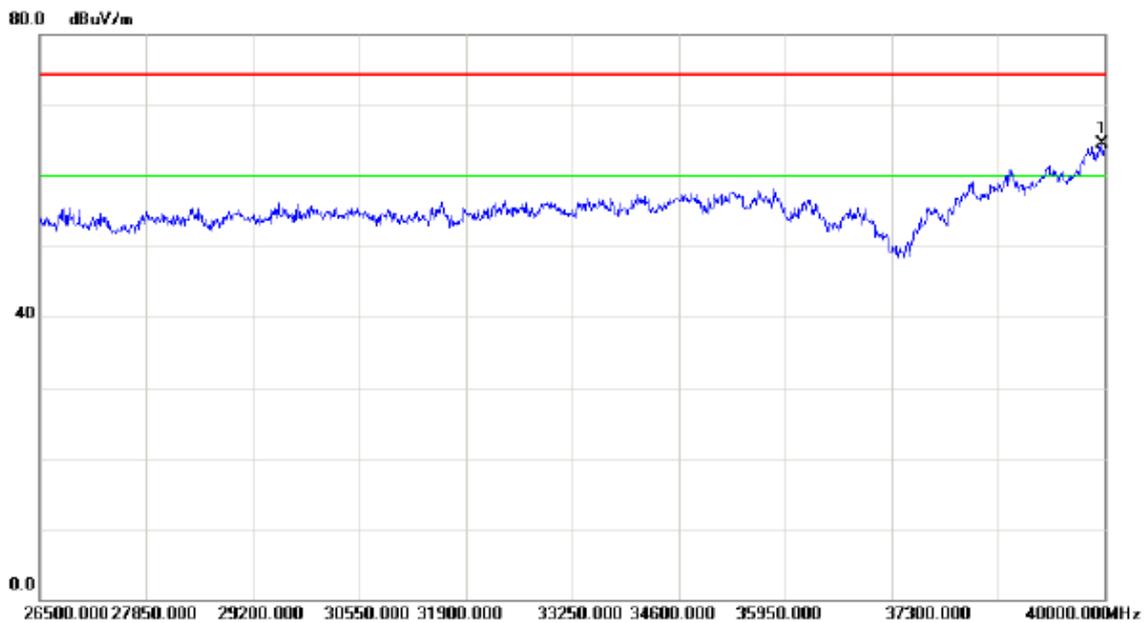

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	39973.00	47.05	17.54	64.59	74.30	-9.71	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


### Horizontal

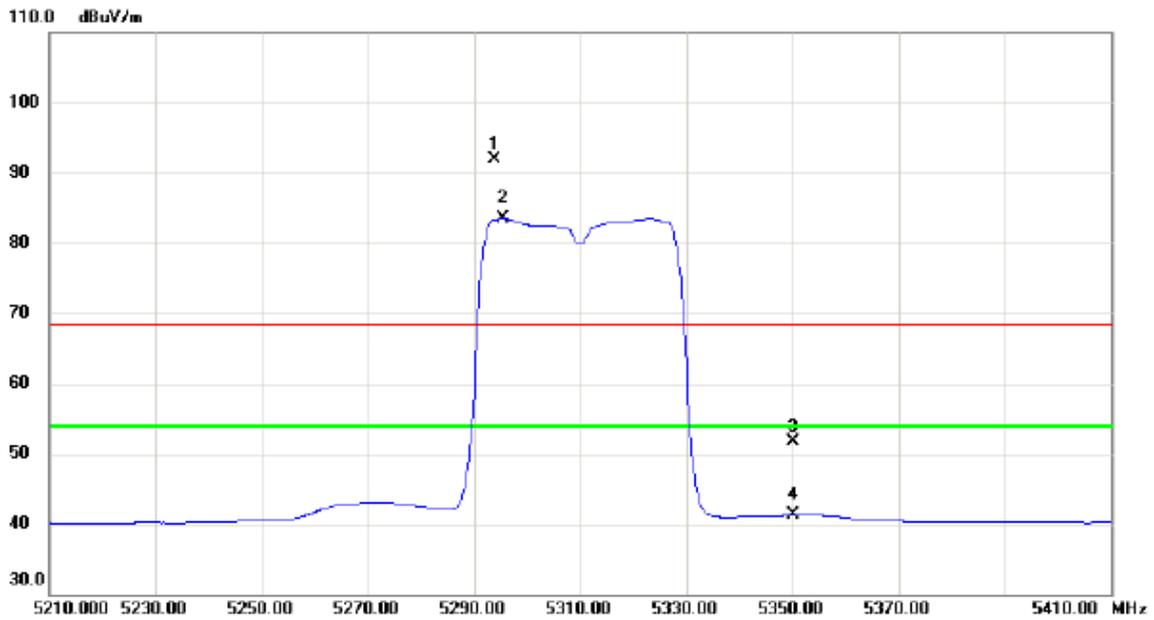

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5293.800	51.42	40.53	91.95	68.30	23.65	peak	No Limit
2	*	5295.400	42.89	40.53	83.42	54.00	29.42	AVG	No Limit
3		5350.000	11.12	40.64	51.76	68.30	-16.54	peak	
4		5350.000	0.59	40.64	41.23	54.00	-12.77	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

### Horizontal

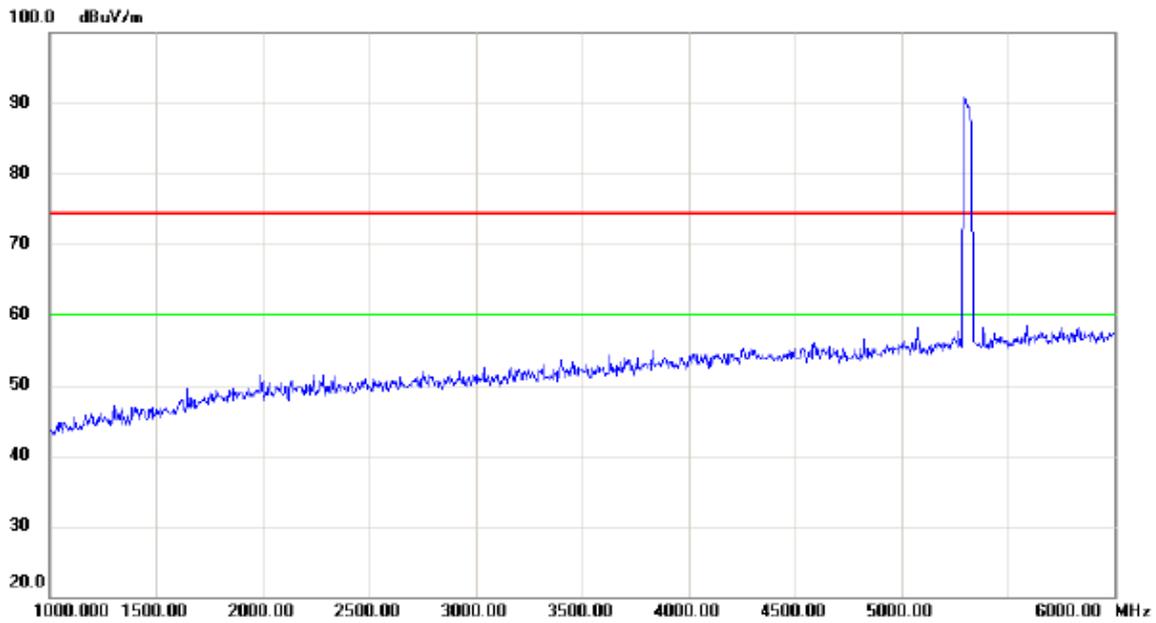


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	39.40	14.17	53.57	74.30	-20.73	peak	
2	*	15930.00	38.47	18.89	57.36	74.30	-16.94	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

### Horizontal

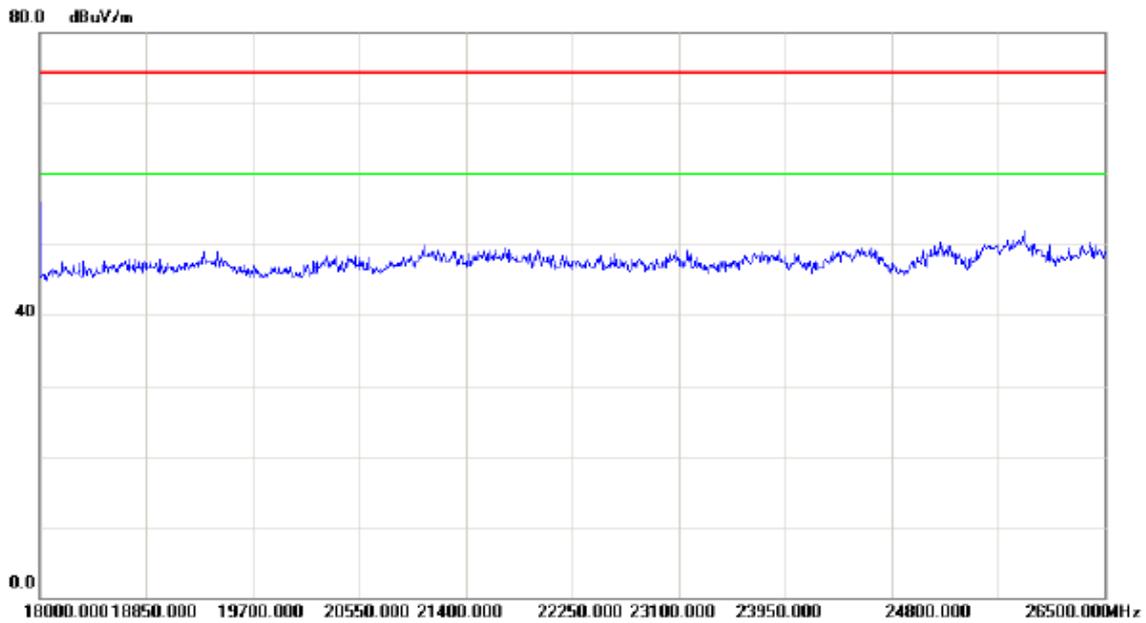


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

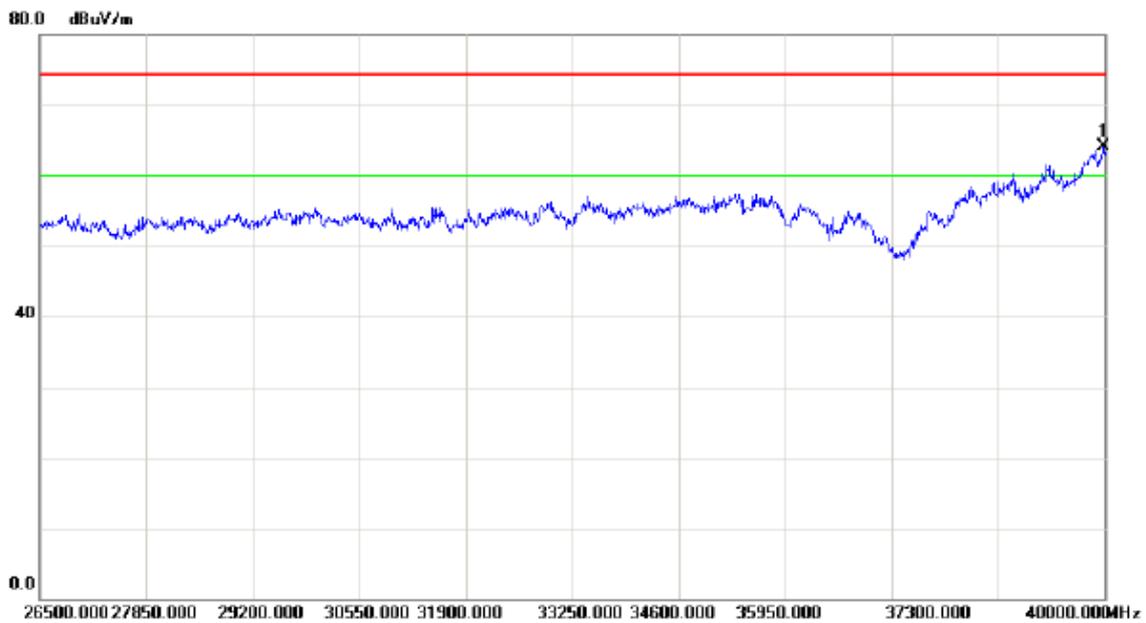

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39986.50	46.51	17.56	64.07	74.30	-10.23	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


**Vertical**

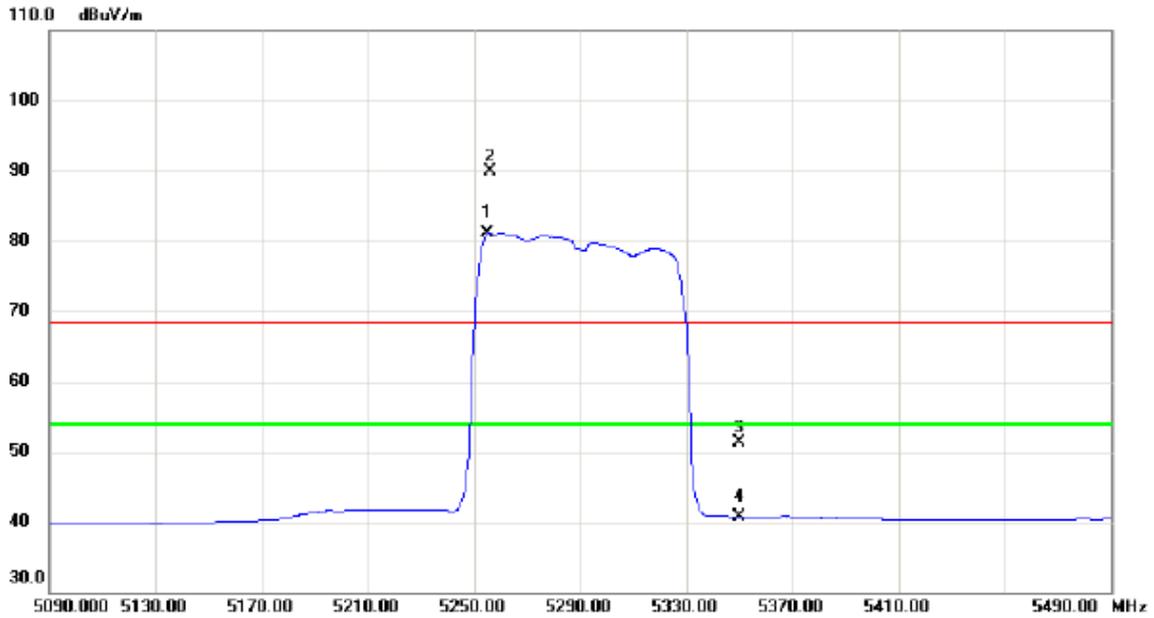


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5255.200	40.61	40.44	81.05	54.00	27.05	AVG	No Limit
2	X	5256.000	49.44	40.44	89.88	68.30	21.58	peak	No Limit
3		5350.000	10.56	40.64	51.20	68.30	-17.10	peak	
4		5350.000	0.10	40.64	40.74	54.00	-13.26	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

### Vertical

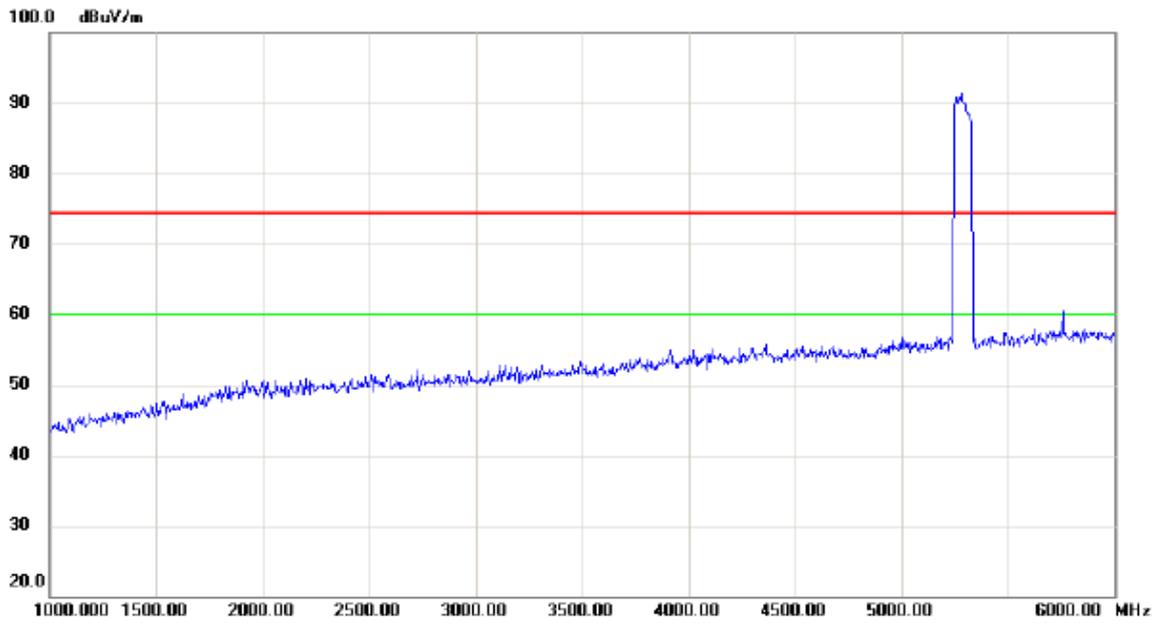


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

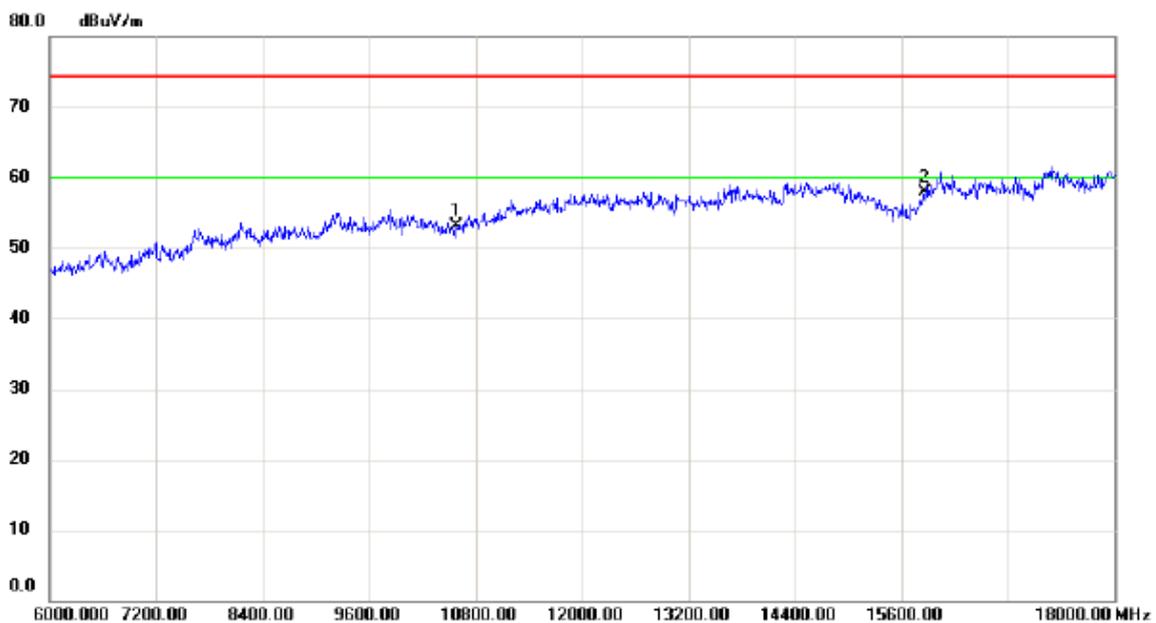


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	10580.00	39.01	14.00	53.01	74.30	-21.29	peak	
2 *	15870.00	39.41	18.57	57.98	74.30	-16.32	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

### Vertical

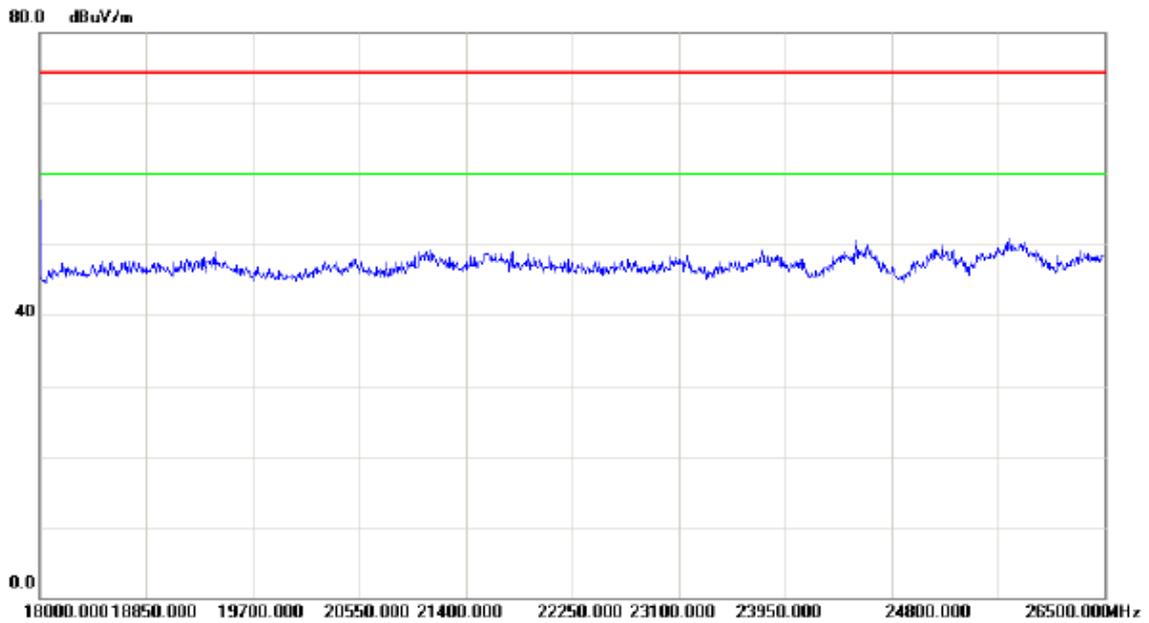


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

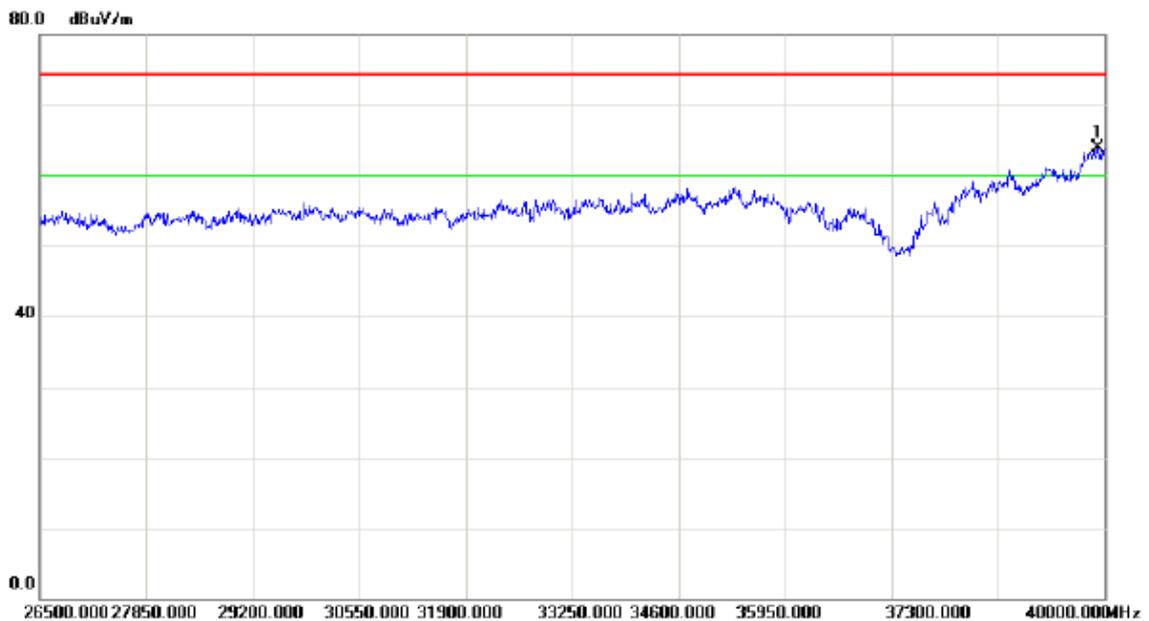

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39919.00	46.49	17.40	63.89	74.30	-10.41	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


### Horizontal

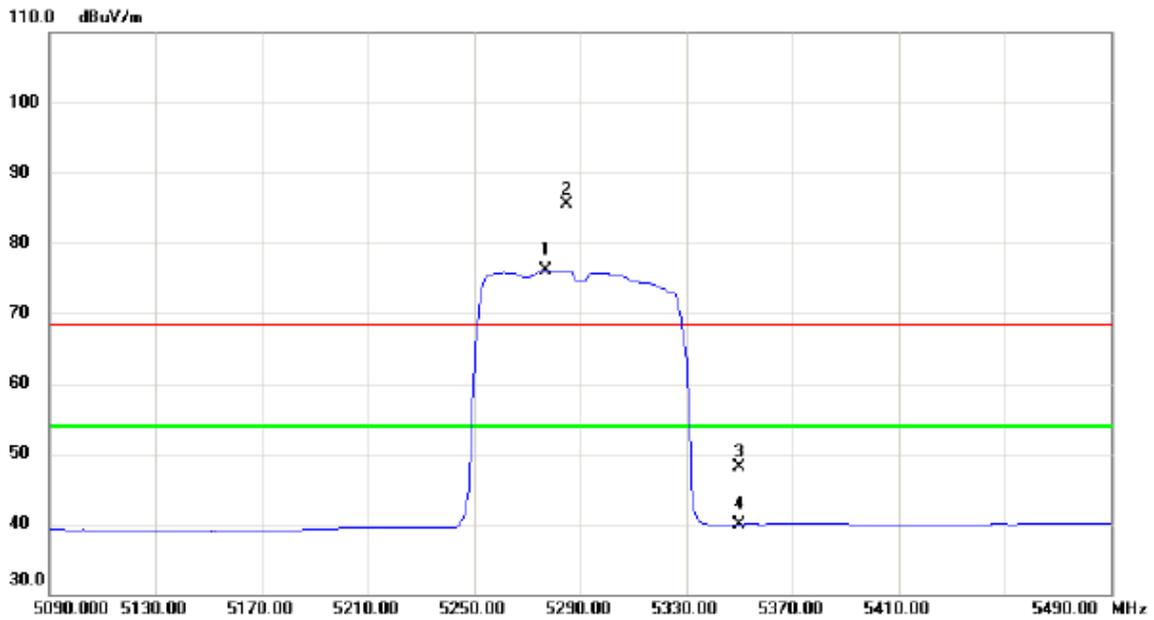


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5276.800	35.59	40.48	76.07	54.00	22.07	AVG	No Limit
2	X	5284.800	44.99	40.50	85.49	68.30	17.19	peak	No Limit
3		5350.000	7.47	40.64	48.11	68.30	-20.19	peak	
4		5350.000	-0.68	40.64	39.96	54.00	-14.04	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

### Horizontal

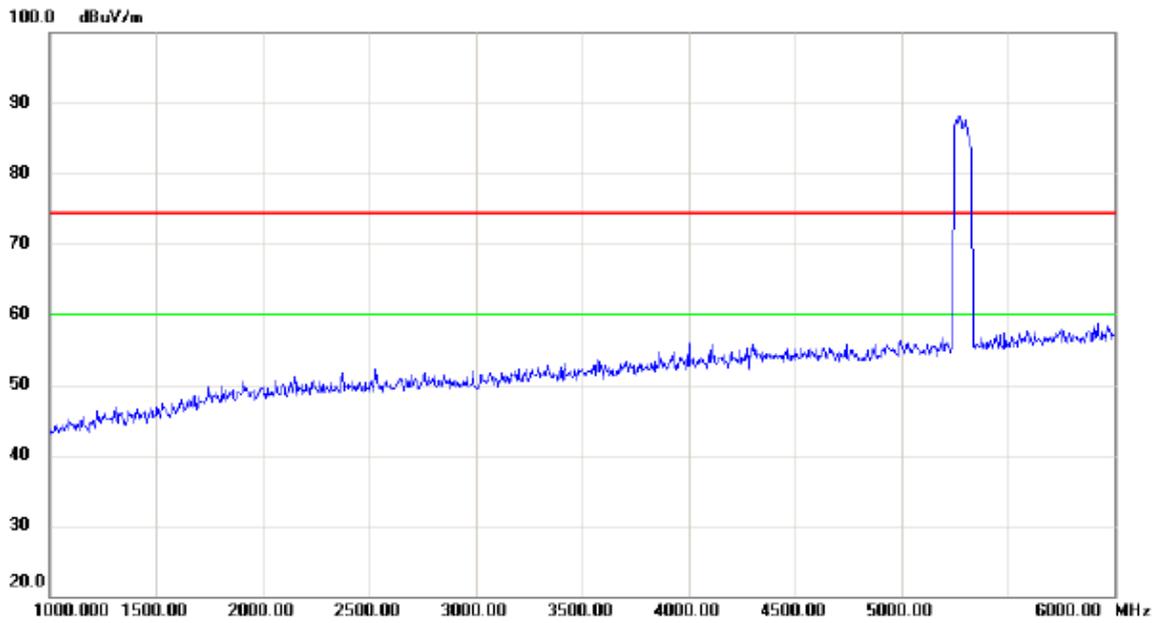

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

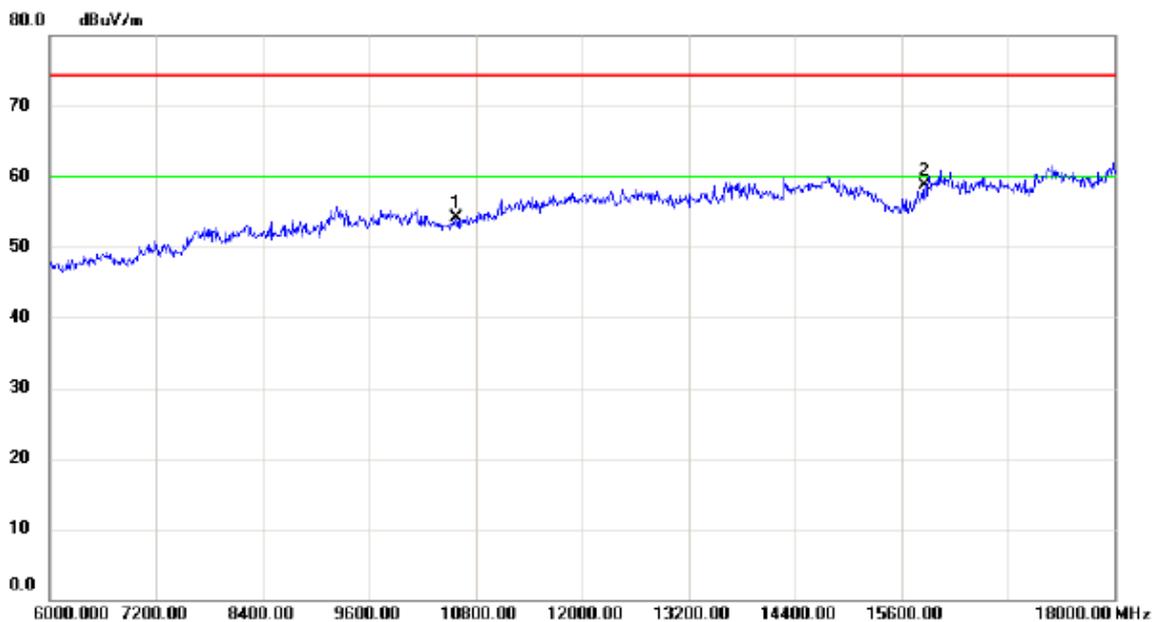

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10580.00	40.05	14.00	54.05	74.30	-20.25	peak	
2	*	15870.00	40.22	18.57	58.79	74.30	-15.51	peak	