



Report No.: RZA2009-1353HAC



# ANSI C63.19 TEST REPORT

**Product Name** CDMA 1X Digital Mobile Telephone

---

**Model** HUAWEI M228

---

**FCC ID** QISM228

---

**Client** HUAWEI Technologies Co., Ltd.

---

**TA Technology (Shanghai) Co., Ltd.**



## GENERAL SUMMARY

<b>Product Name</b>	CDMA 1X Digital Mobile Telephone	<b>Model</b>	HUAWEI M228
<b>FCC ID</b>	QISM228	<b>Report No.</b>	RZA2009-1353
<b>Client</b>	HUAWEI Technologies Co., Ltd.		
<b>Manufacturer</b>	HUAWEI Technologies Co., Ltd.		
<b>Reference Standard(s)</b>	<b>ANSI C63.19-2007:</b> American National Standard Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.		
<b>Conclusion</b>	<p>This portable wireless equipment has been measured in all cases requested by the relevant standards.</p> <p>General Judgment: <b>M4 (RF Emission)</b></p> <p style="text-align: right;">(Stamp)</p> <p style="text-align: right;">Date of issue: <b>October 23<sup>rd</sup>, 2009</b></p> 		
<b>Comment</b>	The test result only responds to the measured sample.		

Approved by 杨伟中

Yang Weizhong

Revised by 凌敏宝

Ling Minbao

Performed by 王路

Wang Lu

## TABLE OF CONTENT

1. General Information .....	4
1.1. Notes of the test report .....	4
1.2. Testing laboratory .....	4
1.3. Applicant Information .....	5
1.4. Manufacturer Information .....	5
1.5. Information of EUT .....	6
1.6. The Ambient Conditions during Test .....	7
1.7. Test Date .....	7
2. Test Information .....	8
2.1. Operational Conditions during Test .....	8
2.1.1. General description of test procedures .....	8
2.1.2. CDMA Test Configuration .....	8
2.2. HAC RF Measurements System Configuration .....	9
2.2.1. HAC Measurement Set-up .....	9
2.2.2. Probe System .....	10
2.2.3. Test Arch Phantom & Phone Positioner .....	11
2.3. RF Test Procedures .....	12
2.4. System Check .....	14
2.5. Probe Modulation Factor .....	15
2.6. Conducted Output Power Measurement .....	17
3. Test Results .....	18
3.1. ANSI C 63.19-2007 Limits .....	18
3.2. Summary Test Results .....	19
3.3. Conclusion .....	20
4. Measurement Uncertainty .....	21
5. Main Test Instruments .....	23
ANNEX A: System Check Results .....	24
ANNEX B: Graph Results .....	28
ANNEX C: E-Probe Calibration Certificate .....	46
ANNEX D: H-Probe Calibration Certificate .....	55
ANNEX E: CD835V3 Dipole Calibration Certificate(S/N1133) .....	64
ANNEX F: CD1880V3 Dipole Calibration Certificate(S/N1115) .....	70
ANNEX G: DAE4 Calibration Certificate .....	76
ANNEX H: The EUT Appearances and Test Configuration .....	81

## 1. General Information

### 1.1. Notes of the test report

**TA Technology (Shanghai) Co., Ltd.** guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

**TA Technology (Shanghai) Co., Ltd.** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

### 1.2. Testing laboratory

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai,China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Yang Weizhong  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [yangweizhong@ta-shanghai.com](mailto:yangweizhong@ta-shanghai.com)

### **1.3. Applicant Information**

Company: HUAWEI Technologies Co., Ltd.  
Address: Bantian, Longgang District  
City: Shenzhen  
Postal Code: 518129  
Country: P.R. China  
Contact: Wang Yue  
Telephone: 0755-28780808  
Fax: 0755-28780808

### **1.4. Manufacturer Information**

Company: HUAWEI Technologies Co., Ltd.  
Address: Bantian, Longgang District  
City: Shenzhen  
Postal Code: 518129  
Country: P.R. China  
Telephone: 0755-28780808  
Fax: 0755-28780808

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2009-1353HAC

Page 6 of 81

**1.5. Information of EUT**

**General information**

Device type:	Portable device		
Product Name:	CDMA 1X Digital Mobile Telephone		
SN or IMEI:	YS2AB10960300236		
Antenna type:	internal antenna		
Device operating configurations:			
Operating mode(s):	CDMA Cellular		
	CDMA PCS		
	CDMA AWS		
Test modulation:	QPSK		
Rated Output Power:	CDMA Cellular: 24dBm		
	CDMA PCS: 24dBm		
	CDMA AWS: 24dBm		
Operating frequency range(s)	Band	Tx (MHz)	Rx (MHz)
	CDMA Cellular	824.7 ~ 848.31	869.7 ~ 893.31
	CDMA PCS	1851.25 ~ 1908.75	1931.25 ~ 1988.75
	CDMA AWS	1711.25 ~ 1752.5	2111.25 ~ 2152.5
Hardware version:	Ver.B		
Software version:	M228C45B207		

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2009-1353HAC

Page 7 of 81

### Auxiliary equipment details

#### AE1:Battery

Model: HB5A2H  
Manufacture: HUAWEI Technologies Co., Ltd.  
IMEI or SN: YAC9608HI2009078

#### AE2:Travel Adaptor

Model: HS-050040U1  
Manufacture: TECH-POWER Electronics (Shenzhen) Co., Ltd.  
IMEI or SN: HKA911933489

Equipment Under Test (EUT) is CDMA 1X Digital Mobile Telephone with internal antenna. It consists of mobile phone, battery and adaptor, and the detail about these is in chapter 1.5 in this report. The EUT supports for CDMA Cellular, CDMA PCS and CDMA AWS.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

### 1.6. The Ambient Conditions during Test

Temperature	Min. = 18°C, Max. = 28 °C
Relative humidity	Min. = 0%, Max. = 80%
Ground system resistance	< 0.5 $\Omega$
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

### 1.7. Test Date

The test is performed from October 20, 2009 to October 21, 2009.

## 2. Test Information

### 2.1. Operational Conditions during Test

#### 2.1.1. General description of test procedures

The phone was tested in all normal configurations for the ear use. The EUT is mounted in the device holder equivalent as for classic dosimeter measurements. The acoustic output of the EUT shall coincide with the center point of the area formed by the dielectric wire and the middle bar of the arch's top frame. The EUT shall be moved vertically upwards until it touches the frame. The fine adjustment is possible by sliding the complete. EUT holder on the yellow base plate of the Test Arch phantom. These test configurations are tested at the high, middle and low frequency channels of each applicable operating mode; for example, GSM, WCDMA (UMTS), CDMA and TDMA.

#### 2.1.2. CDMA Test Configuration

A communication link is set up with a System Simulator (SS) by air link, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) are allocated to 1013, 384 and 777 respectively in the case of CDMA Cellular, allocated to 25, 600 and 1175 respectively in the case of CDMA PCS, allocated to 25, 450 and 850 respectively in the case of CDMA AWS, The EUT is commanded to operate at maximum transmitting power.

Test Parameter setup for maximum RF output power according to section 4.4.5 of 3GPP2.

Parameter	Units	Value
I or	dBm/1.23MHz	-104
PilotE c /I or	dB	-7
TrafficE c /I or	dB	-7.4

## 2.2. HAC RF Measurements System Configuration

### 2.2.1. HAC Measurement Set-up

These measurements are performed using the DASY4 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Stäubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor. The robot is a six-axis industrial robot performing precise movements. Cell controller systems contain the power supply, robot controller, teach pendant (Joystick) and remote control, and are used to drive the robot motors. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification; signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

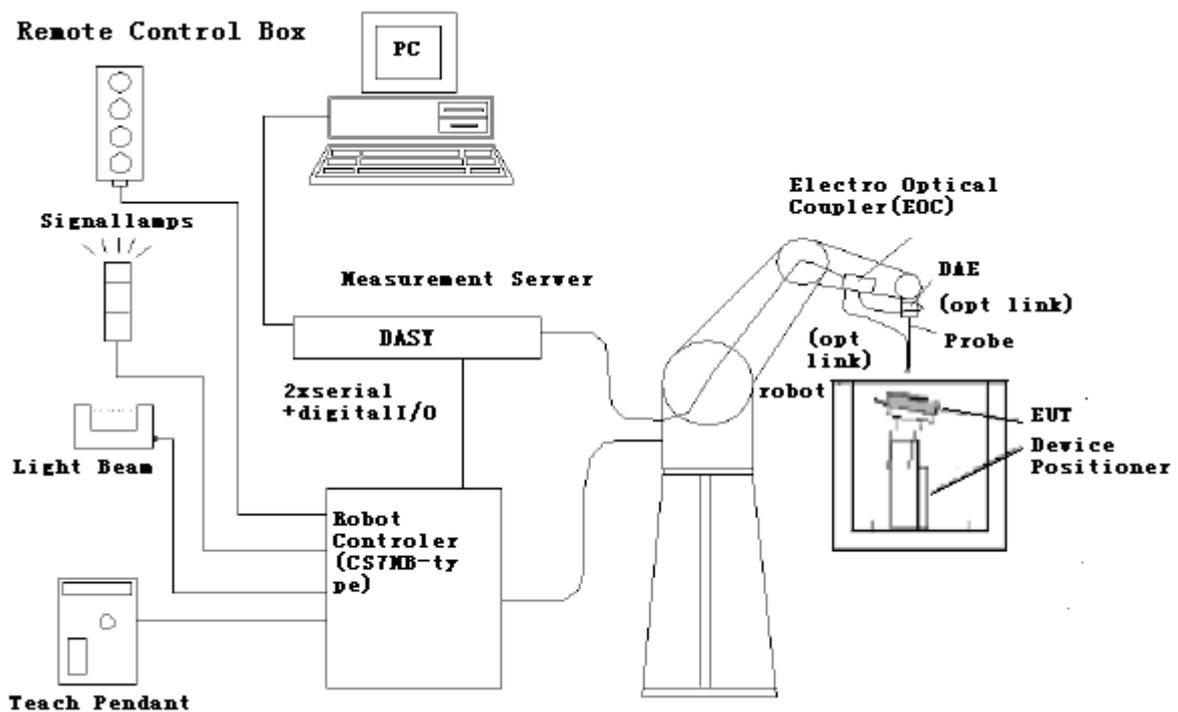


Figure 1 HAC Test Measurement Set-up

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

### 2.2.2. Probe System

The HAC measurements were conducted with the E-Field Probe ER3DV6 and the H-Field Probe H3DV6 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

#### E-Field Probe Description

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material
Calibration	In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$ , $k=2$ )
Frequency	40 MHz to > 6 GHz (can be extended to < 20 MHz) Linearity: $\pm 0.2$ dB (100 MHz to 3 GHz)
Directivity	$\pm 0.2$ dB in air (rotation around probe axis) $\pm 0.4$ dB in air (rotation normal to probe axis)
Dynamic Range	2 V/m to > 1000 V/m; Linearity: $\pm 0.2$ dB
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm
Application	General near-field measurements up to 6 GHz Field component measurements Fast automatic scanning in phantoms



Figure 2 ER3DV6 E-field Probe

#### H-Field Probe Description

Construction	Three concentric loop sensors with 3.8 mm loop diameters Resistively loaded detector diodes for linear response Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Frequency	200 MHz to 3 GHz (absolute accuracy $\pm 6.0\%$ , $k=2$ ); Output linearized
Directivity	$\pm 0.2$ dB (spherical isotropy error)
Dynamic Range	10 mA/m to 2 A/m at 1 GHz
E-Field Interference	< 10% at 3 GHz (for plane wave)
Dimensions	Overall length: 330 mm (Tip: 40 mm) Tip diameter: 6 mm (Body: 12 mm) Distance from probe tip to dipole centers: 3 mm



Figure 3 H3DV6 H-field Probe


Application            General magnetic near-field measurements up to 3  
                              GHz (in air or liquids)  
                              Field component measurements  
                              Surface current measurements  
                              Low interaction with the measured field

**2.2.3. Test Arch Phantom & Phone Positioner**

The Test Arch phantom should be positioned horizontally on a stable surface. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. It enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot (Dimensions: 370 x 370 x 370 mm).

The Device reference point is set for the EUT at 6.3 mm, the Grid reference point is on the upper surface at the origin of the coordinates, and the “user point \Height Check 0.5 mm” is 0.5mm above the center, allowing verification of the gap of 0.5mm while the probe is positioned there.

The Phone Positioner supports accurate and reliable positioning of any phone with effect on near field  $\leq \pm 0.5$  dB.

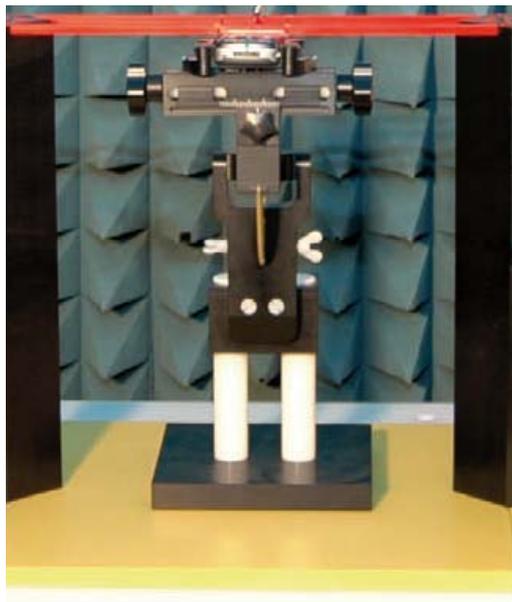

**Figure 4 HAC Phantom & Device Holder**

### **2.3. RF Test Procedures**

**The evaluation was performed with the following procedure:**

1. Confirm proper operation of the field probe, probe measurement system and other instrumentation and the positioning system.
2. Position the WD in its intended test position. The gauge block can simplify this positioning. Note that a separate E-field and H-field gauge block will be needed if the center of the probe sensor elements is at different distances from the tip of the probe.
3. Configure the WD normal operation for maximum rated RF output power, at the desired channel and other operating parameters (e.g., test mode), as intended for the test.
4. The center sub-grid shall center on the center of the axial measurement point or the acoustic output, as appropriate. Locate the field probe at the initial test position in the 50 mm by 50 mm grid, which is contained in the measurement plane. If the field alignment method is used, align the probe for maximum field reception.
5. Record the reading.
6. Scan the entire 50 mm by 50 mm region in equally spaced increments and record the reading at each measurement point. The grid is 5 cm by 5 cm area that is divided into 9 evenly sized blocks or sub-grids. The distance between measurement points shall be sufficient to assure the identification of the maximum reading.
7. Identify the five contiguous sub-grids around the center sub-grid with the lowest maximum field strength readings. Thus the six areas to be used to determine the WD's highest emissions are identified and outlined for the final manual scan. Please note that a maximum of five blocks can be excluded for both E-field and H-field measurements for the WD output being measured. Stated another way, the center sub-grid and three others must be common to both the E-field and H-field measurements.
8. Identify the maximum field reading within the non-excluded sub-grids identified in Step 7.
9. Convert the maximum field strength reading identified in Step 8 to V/m or A/m, as appropriate. For probes which require a probe modulation factor, this conversion shall be done using the appropriate probe modulation factor and the calibration.
10. Repeat Step 1 through Step 10 for both the E-field and H-field measurements.
11. Compare this reading to the categories in ANSI C63.19 Clause 7 and record the resulting category. The lowest category number listed in 7.2, Table 7.4, or Table 7.5 obtained in Step 10 for either E- or H-field determines the M category for the audio coupling mode assessment. Record the WD category rating.



Figure 5 WD reference and plane for RF emission measurements

## 2.4. System Check


### Validation Procedure

Place a dipole antenna meeting the requirements given in ANSI C63.19 D.5 in the position normally occupied by the WD. The dipole antenna serves as a known source for an electrical and magnetic output. Position the E-field and H-field probes so that:

The probes and their cables are parallel to the coaxial feed of the dipole antenna.

The probe cables and the coaxial feed of the dipole antenna approach the measurement area from opposite directions.

The center point of the probe element(s) are 10 mm from the closest surface of the dipole elements. Validation was performed to verify that measured E-field and H-field values are within +/-25% from the target reference values provided by the manufacturer. "Values within +/-25% are acceptable. Of which 12% is deviation and 13% is measurement uncertainty."

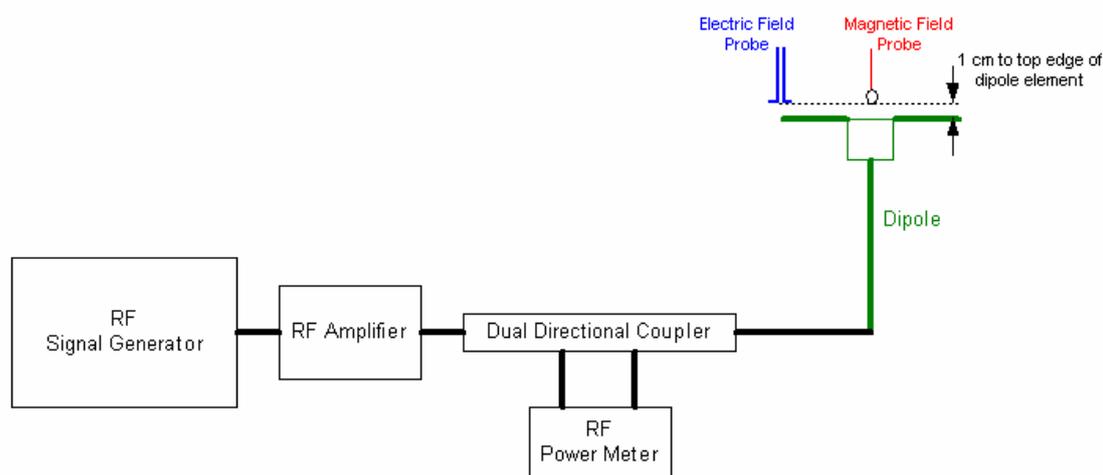

**Figure 6 Dipole Validation Setup**

### Dipole Measurement Summary

E-Field Scan						
Mode	Frequency (MHz)	Input Power (mW)	Measured <sup>1</sup> Value(V/m)	Target <sup>2</sup> Value(V/m)	Deviation <sup>3</sup> (%)	Test Date
CW	835	100	149.2	158.2	5.69	October 20, 2009
CW	1880	100	131.4	140.5	6.48	October 21, 2009
F-Field Scan						
Mode	Frequency (MHz)	Input Power (mW)	Measured Value(A/m)	Target Value(A/m)	Deviation (%)	Test Date
CW	835	100	0.443	0.446	0.67	October 20, 2009
CW	1880	100	0.449	0.468	4.06	October 21, 2009

Notes: 1. please refer to the attachment for detailed measurement data and plot.

2. Target value is provided by SPEAD in the calibration certificate of specific dipoles.

3. Deviation (%) = 100 \* (Target value minus Measured value) divided by Target value.

## 2.5. Probe Modulation Factor

The Probe Modulation Factor (PMF) is defined as the ratio of the field readings for a CW and a modulated signal with the equivalent Field Envelope Peak as defined in ANSI C63.19 (Chapter C.3.1). Calibration shall be made of the modulation response of the probe and its instrumentation chain. This Calibration shall be performed with the field probe, attached to the instrumentation that is to be used with it during the measurement. The response of the probe system to a CW field at the frequency(s) of interest is compared to its response to a modulated signal with equal peak amplitude. The field level of the test signals shall be more than 10dB above the ambient level and the noise floor of the instrumentation being used. The ratio of the CW reading to that taken with a modulated field shall be applied to the readings taken of modulated fields of the specified type.

### Modulation Factor Test Procedure

This may be done using the following procedure:

1. Fix the field probe in a set location relative to a field generating device, such as the reference dipole antenna.
2. Illuminate the probe using the wireless device connected to the reference dipole with a test signal at the intended measurement frequency, Ensure there is sufficient field coupling between the probe and the antenna so the resulting reading is greater than 10 dB above the probe system noise floor but within the systems operating range.
3. Record the amplitude applied to the antenna during transmission and the field strength measured by the E-field probe located near the tip of the dipole antenna
4. Replace the wireless device with an RF signal generator producing an unmodulated CW signal and set to the wireless device operating frequency.
5. Set the amplitude of the unmodulated signal to equal that recorded from the wireless device.
6. Record the reading of the probe measurement system of the unmodulated signal.
7. The ratio, in linear units, of the probe reading in Step 6 to the reading in Step 3 is the E-field modulation factor.  $PMF_E = E_{CW} / E_{mod}$  ( $PMF_H = H_{CW} / H_{mod}$ )
8. Repeat the previous steps using the H-field probe, except locate the probe at the center of the dipole.

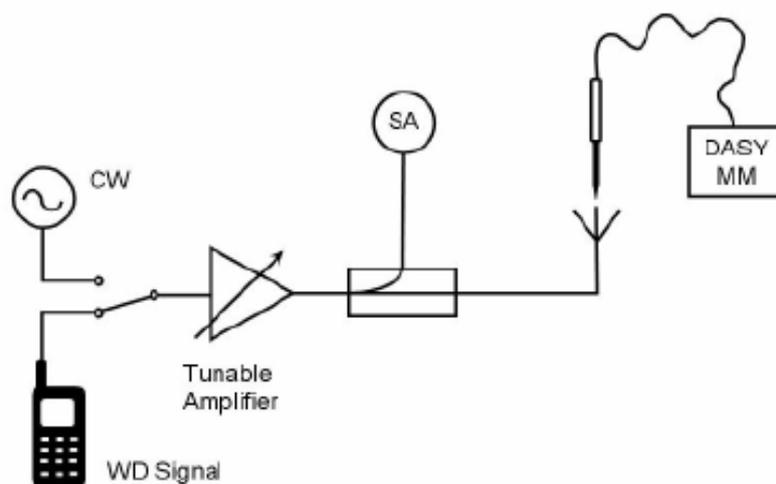


Figure Figure 7 Probe Modulation Factor Test Setup

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2009-1353HAC

Page 16 of 81

**PMF**

<b>Band</b>	<b>E-Field Probe Modulation Factor</b>	<b>H-Field Probe Modulation Factor</b>
CDMA Cellular	1.05	1.01
CDMA PCS	1.03	1.00
CDMA AWS	1.03	1.01

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**2.6. Conducted Output Power Measurement**

**Summary**

The DUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power. Conducted output power was measured using an integrated RF connector and attached RF cable. This result contains conducted output power for the EUT.

**Conducted Power Results**

CDMA Cellular	Conducted Power		
	Channel 777	Channel 384	Channel 1013
RC3 Results(dBm)	24.2	24.3	24.4
RC1 Results(dBm)	24.3	24.3	24.3
CDMA PCS	Conducted Power		
	Channel 1175	Channel 600	Channel 25
RC3 Results(dBm)	24.4	24.3	24.2
RC1 Results(dBm)	24.3	24.2	24.3
CDMA AWS	Conducted Power		
	channel 850	channel 450	channel 25
RC3 Results(dBm)	24.3	24.2	24.3
RC1 Results(dBm)	24.3	24.3	24.2

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

### 3. Test Results

#### 3.1. ANSI C 63.19-2007 Limits

Category		Telephone RF parameters < 960 MHz			
Near field	AWF	E-field emissions		H-field emissions	
Category M1/T1	0	631.0 to 1122.0	V/m	1.91 to 3.39	A/m
	-5	473.2 to 841.4	V/m	1.43 to 2.54	A/m
Category M2/T2	0	354.8 to 631.0	V/m	1.07 to 1.91	A/m
	-5	266.1 to 473.2	V/m	0.80 to 1.43	A/m
Category M3/T3	0	199.5 to 354.8	V/m	0.60 to 1.07	A/m
	-5	149.6 to 266.1	V/m	0.45 to 0.80	A/m
Category M4/T4	0	< 199.5	V/m	< 0.60	A/m
	-5	< 149.6	V/m	< 0.45	A/m
Category		Telephone RF parameters > 960 MHz			
Near field	AWF	E-field emissions		H-field emissions	
Category M1/T1	0	199.5 to 354.8	V/m	0.60 to 1.07	A/m
	-5	149.6 to 266.1	V/m	0.45 to 0.80	A/m
Category M2/T2	0	112.2 to 199.5	V/m	0.34 to 0.60	A/m
	-5	84.1 to 149.6	V/m	0.25 to 0.45	A/m
Category M3/T3	0	63.1 to 112.2	V/m	0.19 to 0.34	A/m
	-5	47.3 to 84.1	V/m	0.14 to 0.25	A/m
Category M4/T4	0	< 63.1	V/m	< 0.19	A/m
	-5	< 47.3	V/m	< 0.14	A/m

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**3.2. Summary Test Results**

**CDMA Cellular Results**

E-Field				
Channel	Frequency (MHz)	Peak Field (V/m)	Power Drift (dB)	Rating
777	848.31	84.70	-0.161	M4
384	836.52	83.70	0.004	M4
1013	824.70	80.90	0.004	M4
H-Field				
Channel	Frequency (MHz)	Peak Field (A/m)	Power Drift (dB)	Rating
777	848.31	0.132	-0.123	M4
384	836.52	0.124	0.022	M4
1013	824.70	0.118	0.077	M4

**CDMA PCS Results**

E-Field				
Channel	Frequency (MHz)	Peak Field (V/m)	Power Drift (dB)	Rating
1175	1908.75	53.20	0.025	M4
600	1880	58.30	-0.135	M4
25	1851.25	47.80	0.071	M4
H-Field				
Channel	Frequency (MHz)	Peak Field (A/m)	Power Drift (dB)	Rating
1175	1908.75	0.140	-0.020	M4
600	1880	0.149	0.137	M4
25	1851.25	0.119	-0.067	M4

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2009-1353HAC

Page 20 of 81

**CDMA AWS Results**

E-Field				
Channel	Frequency (MHz)	Peak Field (V/m)	Power Drift (dB)	Rating
850	1752.5	57.80	0.010	M4
450	1732.5	51.90	0.091	M4
25	1711.25	41.90	0.004	M4
H-Field				
Channel	Frequency (MHz)	Peak Field (A/m)	Power Drift (dB)	Rating
850	1752.5	0.151	-0.126	M4
450	1732.5	0.135	-0.011	M4
25	1711.25	0.114	-0.175	M4

**3.3. Conclusion**

The HAC RF emission measurement indicates that the EUT complies with the HAC limits of the ANSI C63.19-2007. The total M-rating is **M4** for CDMA Cellular, **M4** for CDMA PCS, and **M4** for CDMA AWS.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2009-1353HAC

Page 21 of 81

**4. Measurement Uncertainty**

No.	Error source	Type	Uncertainty Value (%)	Prob. Dist.	k	$c_{iE}$	$c_{iH}$	Standard Uncertainty (%) $u_i$ (%) E	Standard Uncertainty (%) $u_i$ (%) H	Degree of freedom $V_{eff}$ or $v_i$
<b>Measurement System</b>										
1	Probe Calibration	B	5.	N	1	1	1	5.1	5.1	$\infty$
2	Axial Isotropy	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	$\infty$
3	Sensor Displacement	B	16.5	R	$\sqrt{3}$	1	0.145	9.5	1.4	$\infty$
4	Boundary Effects	B	2.4	R	$\sqrt{3}$	1	1	1.4	1.4	$\infty$
5	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	$\infty$
6	Scaling to Peak Envelope Power	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	$\infty$
7	System Detection Limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
8	Readout Electronics	B	0.3	N	1	1	1	0.3	0.3	$\infty$
9	Response Time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	$\infty$
10	Integration Time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	$\infty$
11	RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1	1.7	1.7	$\infty$
12	RF Reflections	B	12.0	R	$\sqrt{3}$	1	1	6.9	6.9	$\infty$
13	Probe Positioner	B	1.2	R	$\sqrt{3}$	1	0.67	0.7	0.5	$\infty$
14	Probe Positioning	A	4.7	R	$\sqrt{3}$	1	0.67	2.7	1.8	$\infty$
15	Extra. And Interpolation	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
<b>Test Sample Related</b>										
16	Device Positioning Vertical	B	4.7	R	$\sqrt{3}$	1	0.67	2.7	1.8	$\infty$
17	Device Positioning Lateral	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
18	Device Holder and Phantom	B	2.4	R	$\sqrt{3}$	1	1	1.4	1.4	$\infty$

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2009-1353HAC

Page 22 of 81

19	Power Drift	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	$\infty$
<b>Phantom and Setup related</b>										
20s	Phantom Thickness	B	2.4	R	$\sqrt{3}$	1	0.67	1.4	0.9	$\infty$
Combined standard uncertainty(%)								14.7	10.9	
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		N	k=2			29.4	21.8	

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2009-1353HAC

Page 23 of 81

**5. Main Test Instruments**

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Power meter	Agilent E4417A	GB41291714	March 14, 2009	One year
02	Power sensor	Agilent 8481H	MY41091316	March 14, 2009	One year
03	Signal Generator	HP 8341B	2730A00804	September 13, 2009	One year
04	Amplifier	IXA-020	0401	No Calibration Requested	
05	BTS	E5515C	MY483609888	December 16, 2008	One year
06	E-Field Probe	ER3DV6	2303	April 27, 2009	One year
07	H-Field Probe	H3DV6	6138	April 27, 2009	One year
08	DAE	DAE4	452	November 18, 2008	One year
09	Validation Kit 835MHz	CD835V3	1133	April 22, 2009	One year
10	Validation Kit 1880MHz	CD1880V3	1115	April 22, 2009	One year

\*\*\*\*\*END OF REPORT BODY\*\*\*\*\*

## ANNEX A: System Check Results

### HAC\_System Performance Check at 835MHz\_E

**DUT: Dipole 835 MHz; Type: CD835V3; SN:1133**

Date/Time: 10/20/2009 8:17:32 PM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1); Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**E Scan - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 149.2 V/m

Probe Modulation Factor = 1.00



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 100.7 V/m; Power Drift = -0.066 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>147.0 M4</b>	Grid 2 <b>149.2 M4</b>	Grid 3 <b>143.9 M4</b>
Grid 4 <b>83.4 M4</b>	Grid 5 <b>85.0 M4</b>	Grid 6 <b>81.1 M4</b>
Grid 7 <b>148.8 M4</b>	Grid 8 <b>154.0 M4</b>	Grid 9 <b>148.9 M4</b>

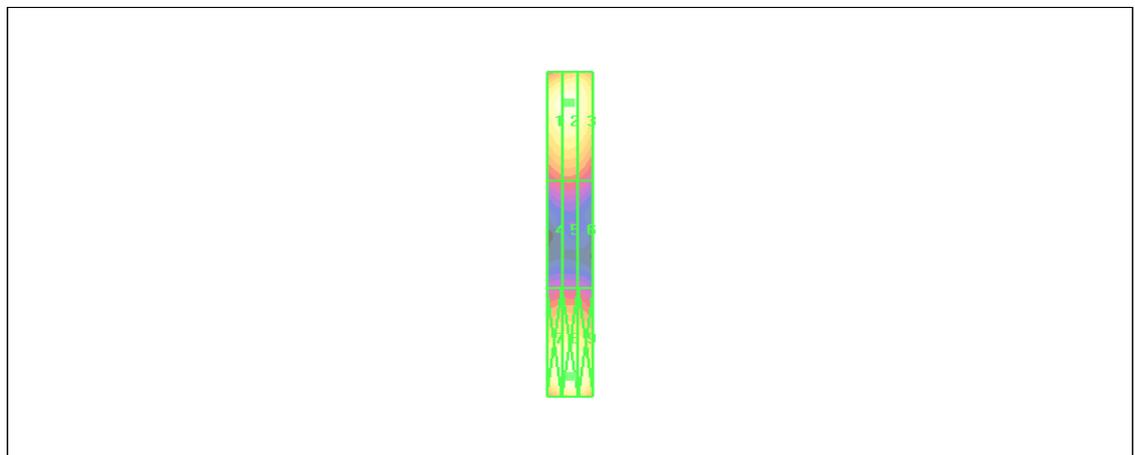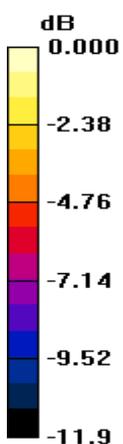

0 dB = 154.0V/m

**Figure 8 System Performance Check 835MHz\_E**

# TA Technology (Shanghai) Co., Ltd. Test Report

**HAC\_System Performance Check at 835MHz\_H**

**DUT: Dipole 835 MHz; Type: CD835V3; SN: 1133**

Date/Time: 10/21/2009 8:49:58 AM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: H3DV6 - SN6138 ; Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**H Scan - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.443 A/m

Probe Modulation Factor = 1.00


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.464 A/m; Power Drift = 0.019 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.391 M4</b>	Grid 2 <b>0.408 M4</b>	Grid 3 <b>0.384 M4</b>
Grid 4 <b>0.427 M4</b>	Grid 5 <b>0.443 M4</b>	Grid 6 <b>0.414 M4</b>
Grid 7 <b>0.397 M4</b>	Grid 8 <b>0.410 M4</b>	Grid 9 <b>0.381 M4</b>

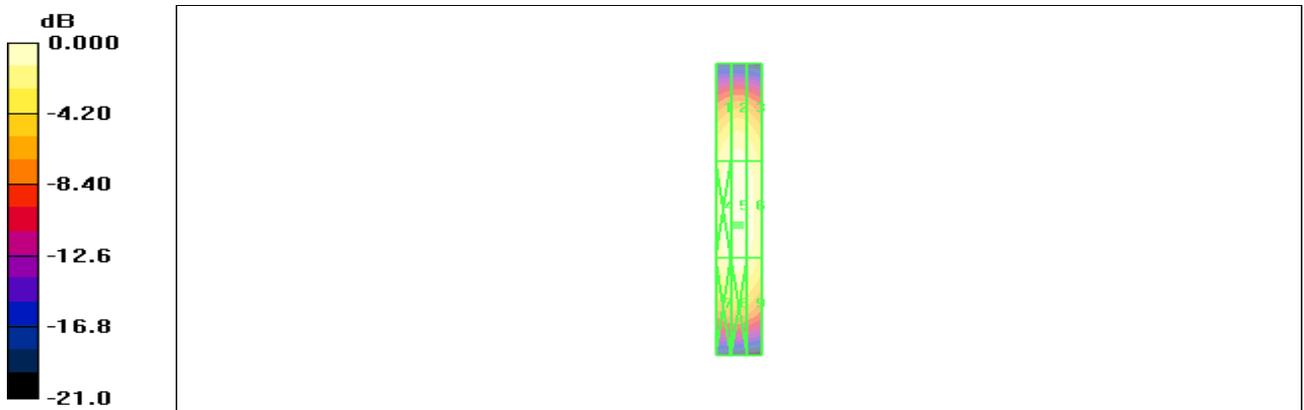

0 dB = 0.443A/m

**Figure 9 System Performance Check 835MHz\_H**

# TA Technology (Shanghai) Co., Ltd. Test Report

**HAC\_System Performance Check at 1880MHz\_E**

**DUT: Dipole 1880 MHz; Type: CD1880V3; SN:1115**

Date/Time: 10/20/2009 9:26:34 PM

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1); Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**E Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 131.4 V/m

Probe Modulation Factor = 1.00


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 151.0 V/m; Power Drift = -0.047 dB

**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>128.5 M2</b>	Grid 2 <b>131.4 M2</b>	Grid 3 <b>128.5 M2</b>
Grid 4 <b>87.5 M3</b>	Grid 5 <b>89.7 M3</b>	Grid 6 <b>86.2 M3</b>
Grid 7 <b>128.7 M2</b>	Grid 8 <b>134.0 M2</b>	Grid 9 <b>130.3 M2</b>

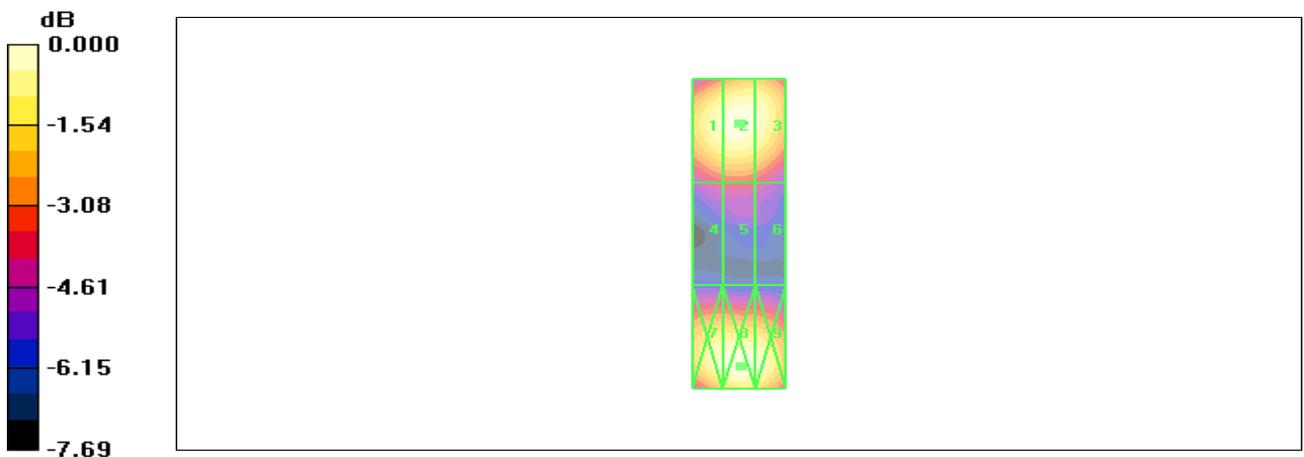

0 dB = 134.0V/m

**Figure 10 System Performance Check 1880MHz\_E**

# TA Technology (Shanghai) Co., Ltd. Test Report

**HAC\_System Performance Check at 1880MHz\_H**

**DUT: Dipole 1880 MHz; Type: CD1880V3; SN:1115**

Date/Time: 10/21/2009 9:49:22 AM

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: H3DV6 - SN6138; ; Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**H Scan - measurement distance from the probe sensor center to Dipole = 10mm/Hearing Aid**

**Compatibility Test (41x181x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.449 A/m

Probe Modulation Factor = 1.00


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.472 A/m; Power Drift = -0.005 dB

**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
<b>0.400 M2</b>	<b>0.413 M2</b>	<b>0.387 M2</b>
Grid 4	Grid 5	Grid 6
<b>0.435 M2</b>	<b>0.449 M2</b>	<b>0.422 M2</b>
Grid 7	Grid 8	Grid 9
<b>0.397 M2</b>	<b>0.410 M2</b>	<b>0.384 M2</b>

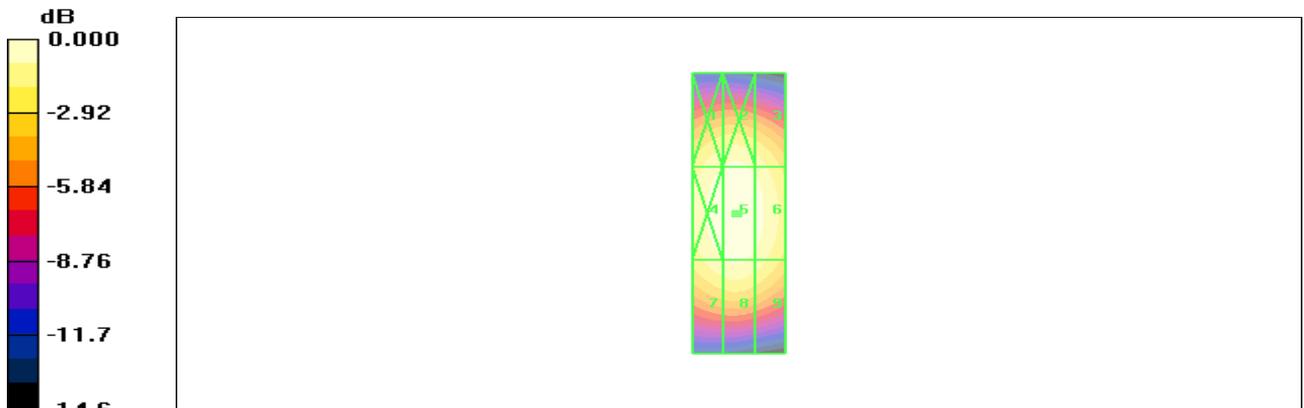

0 dB = 0.449A/m

**Figure 11 System Performance Check 1880MHz\_H**

**ANNEX B: Graph Results**

**HAC RF E-Field CDMA Cellular High Frequency**

Date/Time: 10/20/2009 10:41:12 PM

Communication System: CDMA Cellular; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1); Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test**

**(101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 84.7 V/m

Probe Modulation Factor = 1.05



Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 107.5 V/m; Power Drift = -0.161 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>76.4 M4</b>	Grid 2 <b>80.7 M4</b>	Grid 3 <b>77.1 M4</b>
Grid 4 <b>80.2 M4</b>	Grid 5 <b>84.7 M4</b>	Grid 6 <b>80.3 M4</b>
Grid 7 <b>78.2 M4</b>	Grid 8 <b>82.7 M4</b>	Grid 9 <b>78.4 M4</b>

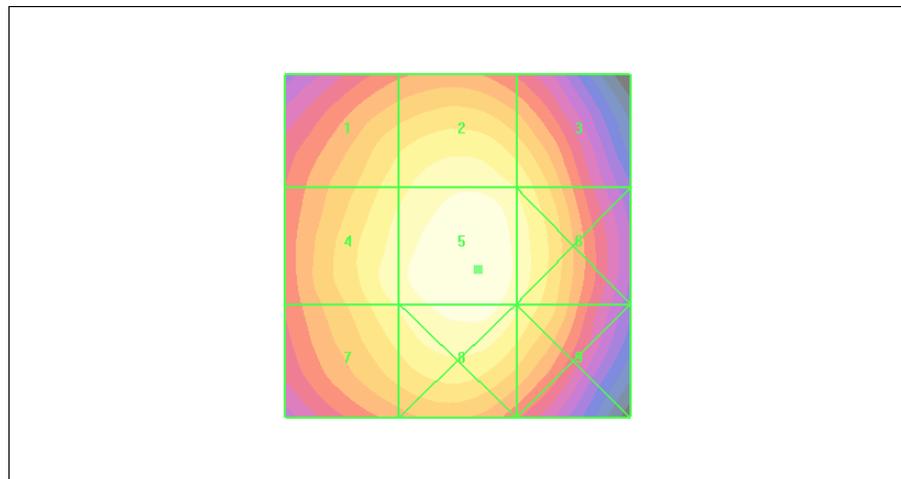

0 dB = 84.7V/m

**Figure 12 HAC RF E-Field CDMA Cellular 777 Channel**

# TA Technology (Shanghai) Co., Ltd. Test Report

## HAC RF E-Field CDMA Cellular Middle Frequency

Date/Time: 10/20/2009 10:46:06 PM

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1); Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**E Scan - ER3D - 2007: 15 mm from Probe Center to the Device 2/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 83.7 V/m

Probe Modulation Factor = 1.05


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 104.9 V/m; Power Drift = 0.004 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
<b>74.6 M4</b>	<b>79.0 M4</b>	<b>75.8 M4</b>
Grid 4	Grid 5	Grid 6
<b>78.6 M4</b>	<b>83.7 M4</b>	<b>80.0 M4</b>
Grid 7	Grid 8	Grid 9
<b>76.5 M4</b>	<b>81.4 M4</b>	<b>77.7 M4</b>

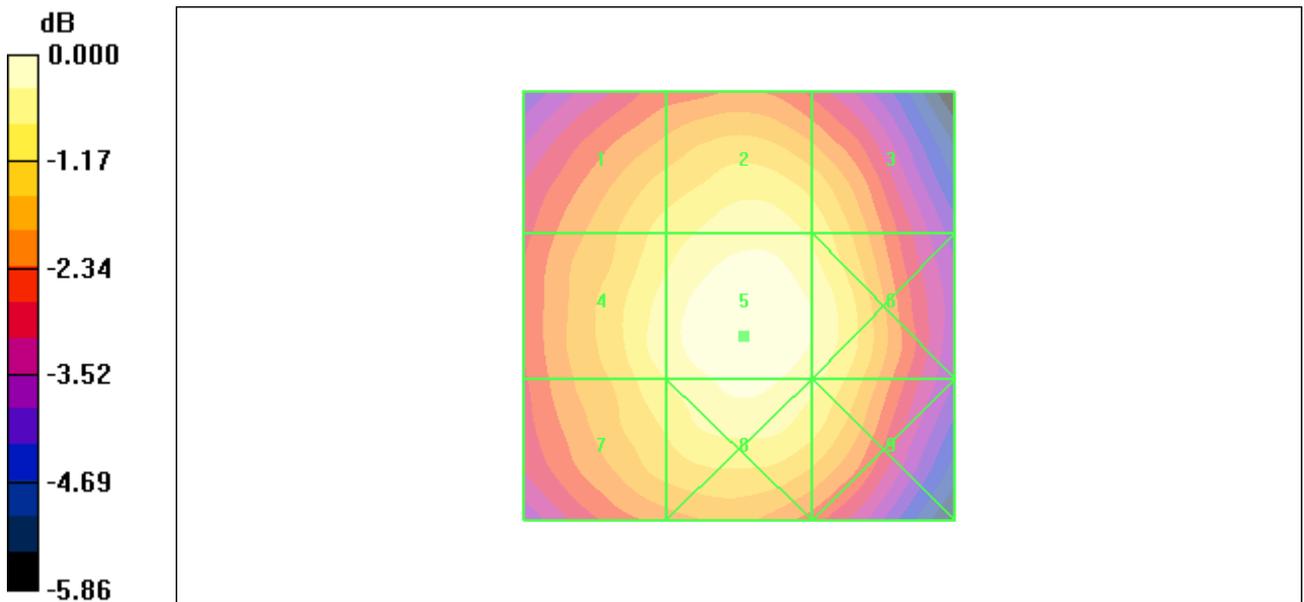

0 dB = 83.7V/m

**Figure 13 HAC RF E-Field CDMA Cellular 384 Channel**

**HAC RF E-Field CDMA Cellular Low Frequency**

Date/Time: 10/20/2009 10:50:55 PM

Communication System: CDMA Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1); Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**E Scan - ER3D - 2007: 15 mm from Probe Center to the Device 3/Hearing Aid Compatibility**

**Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 80.9 V/m

Probe Modulation Factor = 1.05


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 102.2 V/m; Power Drift = 0.004 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
<b>72.8 M4</b>	<b>76.4 M4</b>	<b>74.1 M4</b>
Grid 4	Grid 5	Grid 6
<b>76.4 M4</b>	<b>80.9 M4</b>	<b>78.2 M4</b>
Grid 7	Grid 8	Grid 9
<b>74.5 M4</b>	<b>79.2 M4</b>	<b>76.0 M4</b>

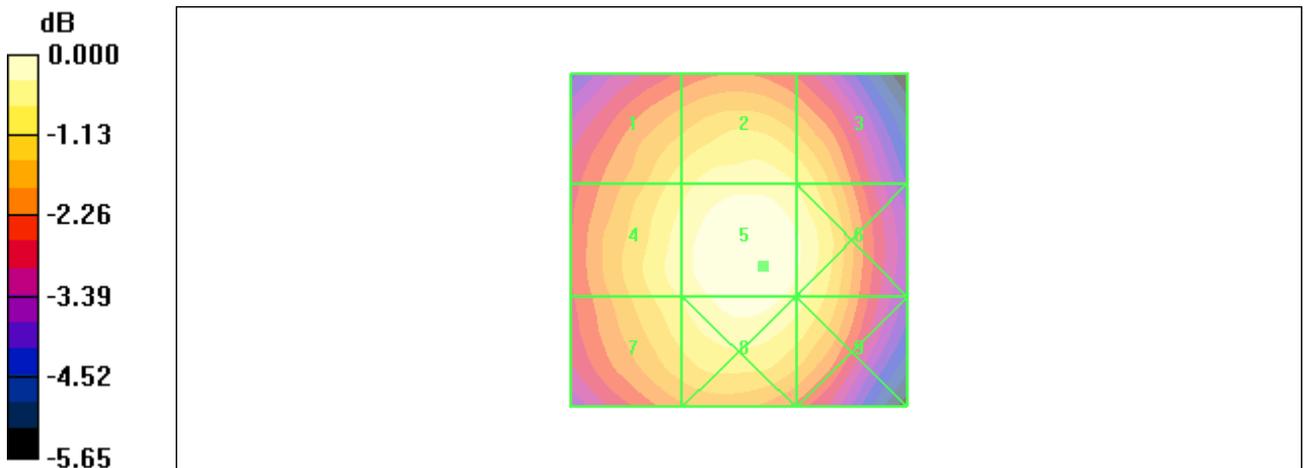

0 dB = 80.9V/m

**Figure 14 HAC RF E-Field CDMA Cellular 1013 Channel**

**HAC RF H-Field CDMA Cellular High Frequency**

Date/Time: 10/21/2009 12:11:32 PM

Communication System: CDMA Cellular; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: H3DV6 - SN6138; ; Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device 2/Hearing Aid Compatibility**

**Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.132 A/m

Probe Modulation Factor = 1.01


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.112 A/m; Power Drift = -0.123 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.179 M4</b>	Grid 2 <b>0.128 M4</b>	Grid 3 <b>0.076 M4</b>
Grid 4 <b>0.184 M4</b>	Grid 5 <b>0.132 M4</b>	Grid 6 <b>0.079 M4</b>
Grid 7 <b>0.183 M4</b>	Grid 8 <b>0.132 M4</b>	Grid 9 <b>0.080 M4</b>

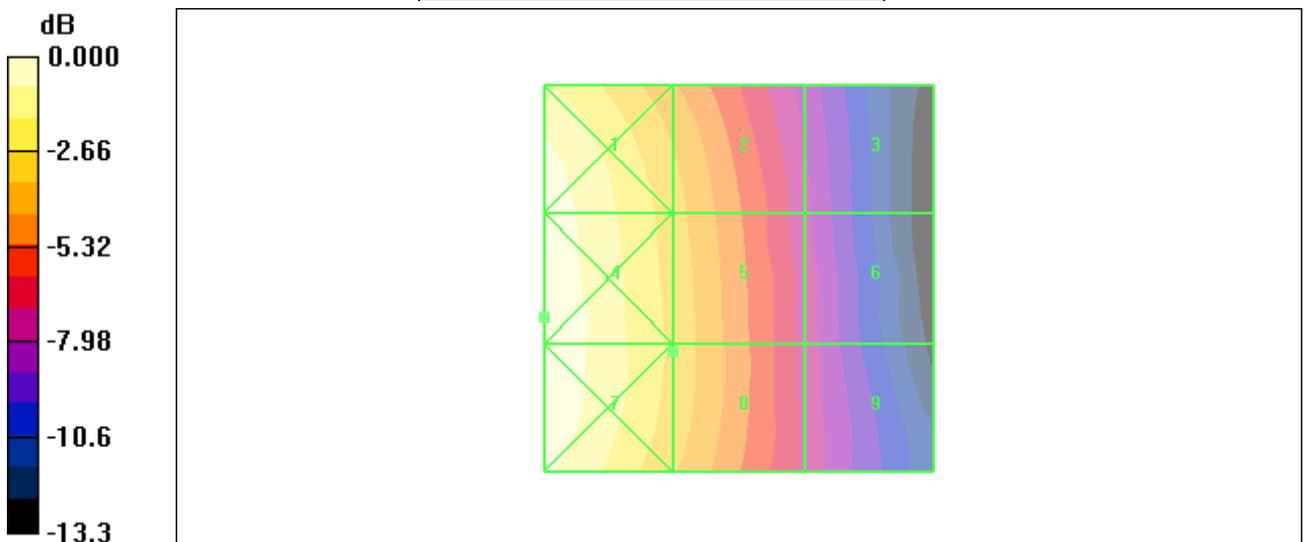

0 dB = 0.184 A/m

**Figure 15 HAC RF H-Field CDMA Cellular 777 Channel**

**HAC RF H-Field CDMA Cellular Middle Frequency**

Date/Time: 10/21/2009 12:16:34 PM

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: H3DV6 - SN6138; ; Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device 3/Hearing Aid Compatibility**

**Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.124 A/m

Probe Modulation Factor = 1.01


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.104 A/m; Power Drift = 0.022 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.169 M4</b>	Grid 2 <b>0.121 M4</b>	Grid 3 <b>0.071 M4</b>
Grid 4 <b>0.172 M4</b>	Grid 5 <b>0.124 M4</b>	Grid 6 <b>0.073 M4</b>
Grid 7 <b>0.172 M4</b>	Grid 8 <b>0.124 M4</b>	Grid 9 <b>0.074 M4</b>

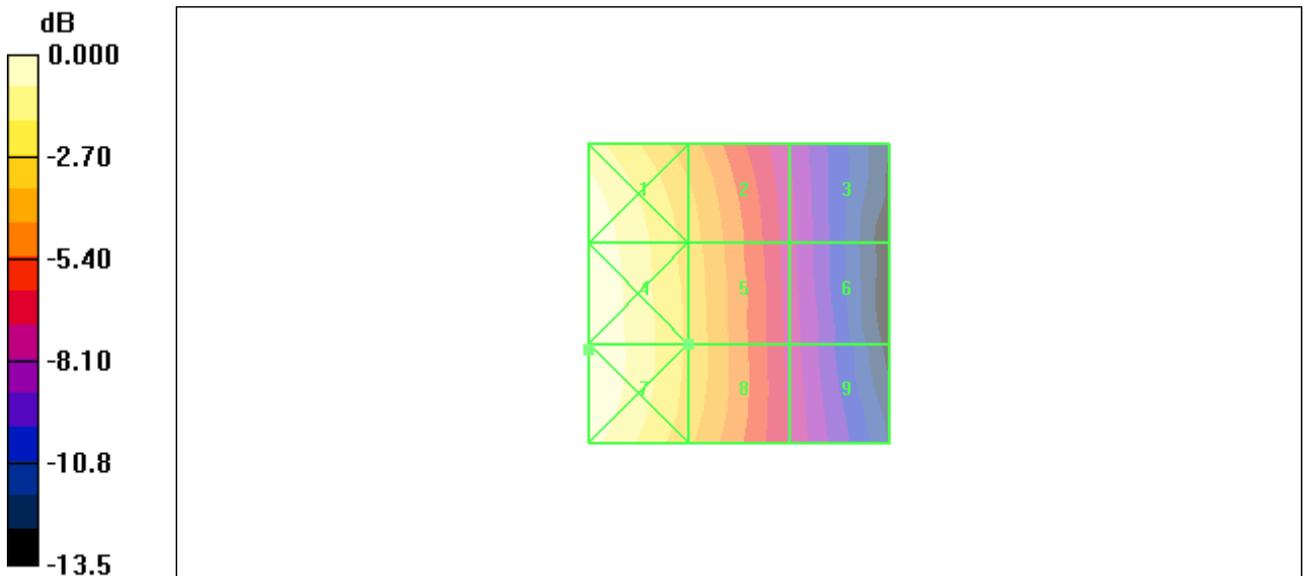

0 dB = 0.172A/m

**Figure 16 HAC RF H-Field CDMA Cellular 384 Channel**

**HAC RF H-Field CDMA Cellular Low Frequency**

Date/Time: 10/21/2009 12:06:36 PM

Communication System: CDMA Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: H3DV6 - SN6138; ; Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test**

**(101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.118 A/m

Probe Modulation Factor = 1.01


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.099 A/m; Power Drift = 0.077 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.161 M4</b>	Grid 2 <b>0.115 M4</b>	Grid 3 <b>0.067 M4</b>
Grid 4 <b>0.164 M4</b>	Grid 5 <b>0.118 M4</b>	Grid 6 <b>0.068 M4</b>
Grid 7 <b>0.164 M4</b>	Grid 8 <b>0.118 M4</b>	Grid 9 <b>0.071 M4</b>

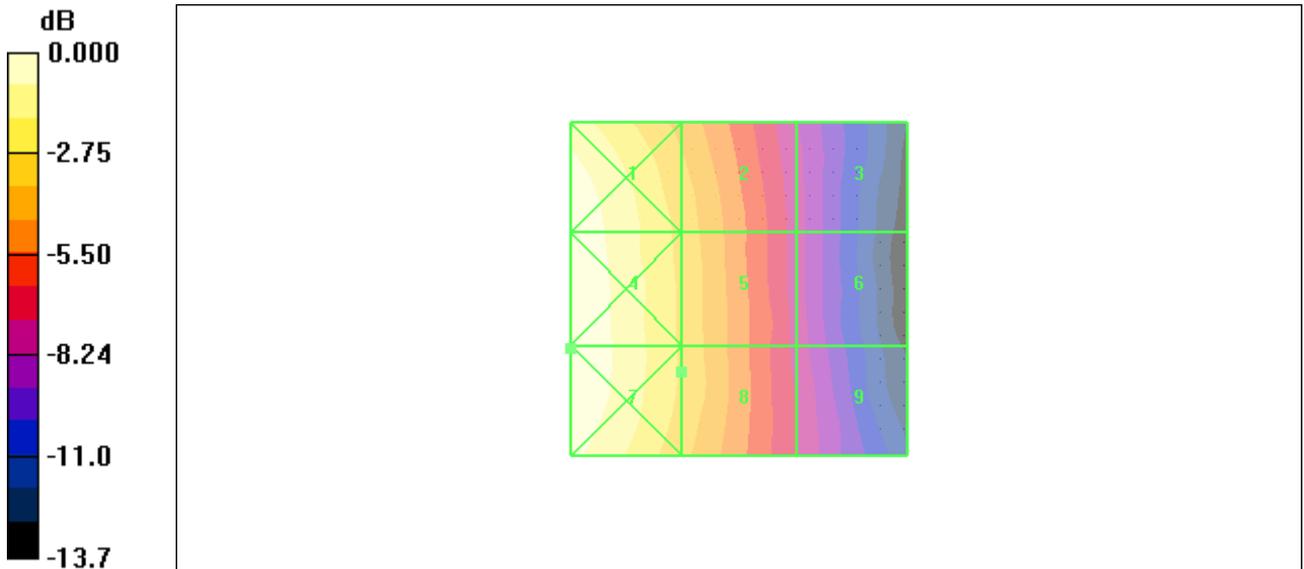

0 dB = 0.164A/m

**Figure 17 HAC RF H-Field CDMA Cellular 1013 Channel**

**HAC RF E-Field CDMA PCS High Frequency**

Date/Time: 10/20/2009 11:06:50 PM

Communication System: CDMA PCS; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1); Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test**

**(101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 53.2 V/m

Probe Modulation Factor = 1.03


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 55.7 V/m; Power Drift = 0.025 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
<b>30.9 M4</b>	<b>41.4 M4</b>	<b>41.4 M4</b>
Grid 4	Grid 5	Grid 6
<b>37.6 M4</b>	<b>53.2 M4</b>	<b>53.1 M4</b>
Grid 7	Grid 8	Grid 9
<b>42.1 M4</b>	<b>53.7 M4</b>	<b>53.5 M4</b>

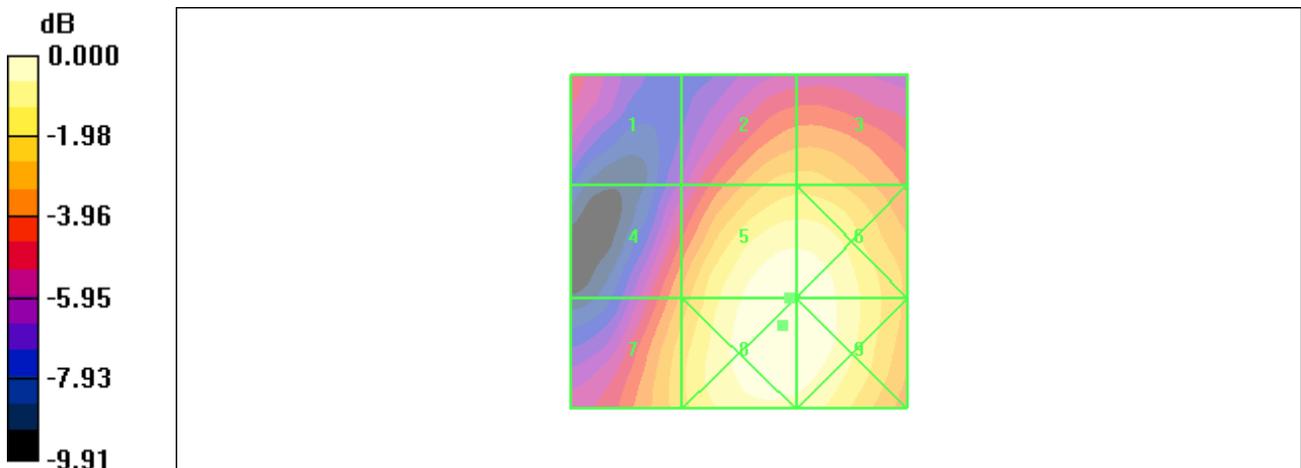

0 dB = 53.7V/m

**Figure 18 HAC RF E-Field CDMA PCS 1175 Channel**

**HAC RF E-Field CDMA PCS Middle Frequency**

Date/Time: 10/20/2009 11:11:39 PM

Communication System: CDMA PCS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1); Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**E Scan - ER3D - 2007: 15 mm from Probe Center to the Device 2/Hearing Aid Compatibility**

**Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 58.3 V/m

Probe Modulation Factor = 1.03


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 63.4 V/m; Power Drift = -0.135 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>32.2 M4</b>	Grid 2 <b>46.4 M4</b>	Grid 3 <b>46.6 M4</b>
Grid 4 <b>42.1 M4</b>	Grid 5 <b>58.3 M4</b>	Grid 6 <b>58.3 M4</b>
Grid 7 <b>45.2 M4</b>	Grid 8 <b>58.5 M4</b>	Grid 9 <b>58.5 M4</b>

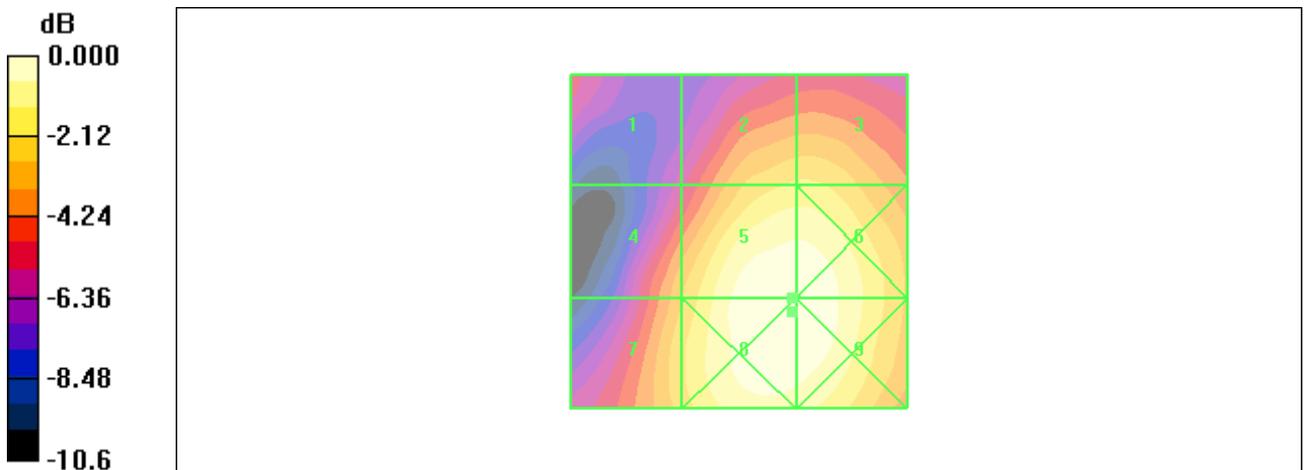

0 dB = 58.5V/m

**Figure 19 HAC RF E-Field CDMA PCS 600 Channel**

# TA Technology (Shanghai) Co., Ltd. Test Report

## HAC RF E-Field CDMA PCS Low Frequency

Date/Time: 10/20/2009 11:16:30 PM

Communication System: CDMA PCS; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1); Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### E Scan - ER3D - 2007: 15 mm from Probe Center to the Device 3/Hearing Aid Compatibility

**Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 47.8 V/m

Probe Modulation Factor = 1.03


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 52.7 V/m; Power Drift = 0.071 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>25.8 M4</b>	Grid 2 <b>38.4 M4</b>	Grid 3 <b>38.4 M4</b>
Grid 4 <b>36.3 M4</b>	Grid 5 <b>47.8 M4</b>	Grid 6 <b>47.4 M4</b>
Grid 7 <b>38.3 M4</b>	Grid 8 <b>47.9 M4</b>	Grid 9 <b>47.4 M4</b>

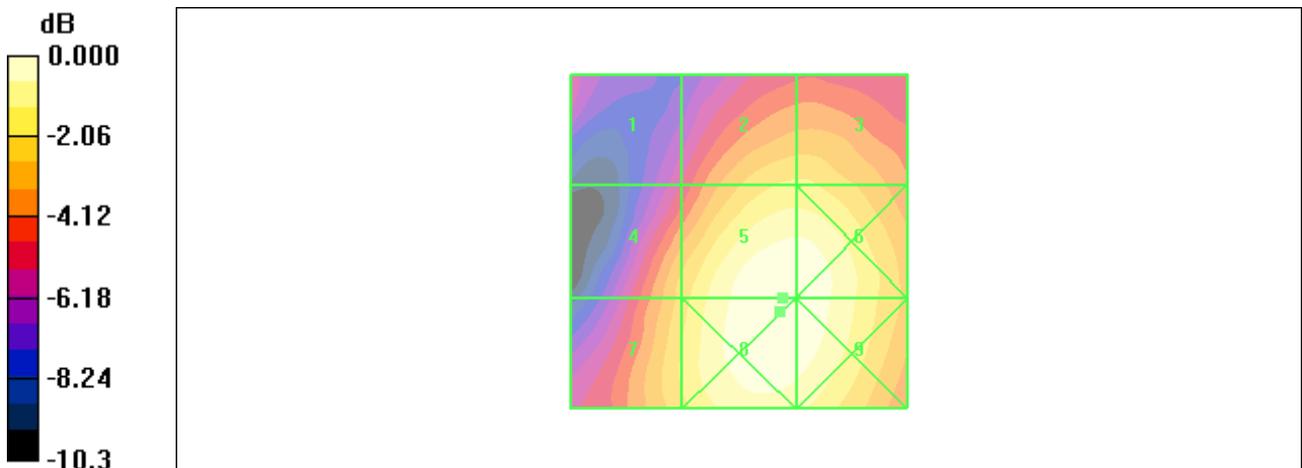

0 dB = 47.9V/m

**Figure 20 HAC RF E-Field CDMA PCS 25 Channel**

# TA Technology (Shanghai) Co., Ltd. Test Report

## HAC RF H-Field CDMA PCS High Frequency

Date/Time: 10/21/2009 12:32:12 PM

Communication System: CDMA PCS; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: H3DV6 - SN6138; ; Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device 2/Hearing Aid Compatibility

**Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.140 A/m

Probe Modulation Factor = 1.00


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.127 A/m; Power Drift = -0.020 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.135 M4</b>	Grid 2 <b>0.129 M4</b>	Grid 3 <b>0.098 M4</b>
Grid 4 <b>0.153 M4</b>	Grid 5 <b>0.140 M4</b>	Grid 6 <b>0.096 M4</b>
Grid 7 <b>0.160 M4</b>	Grid 8 <b>0.142 M4</b>	Grid 9 <b>0.094 M4</b>

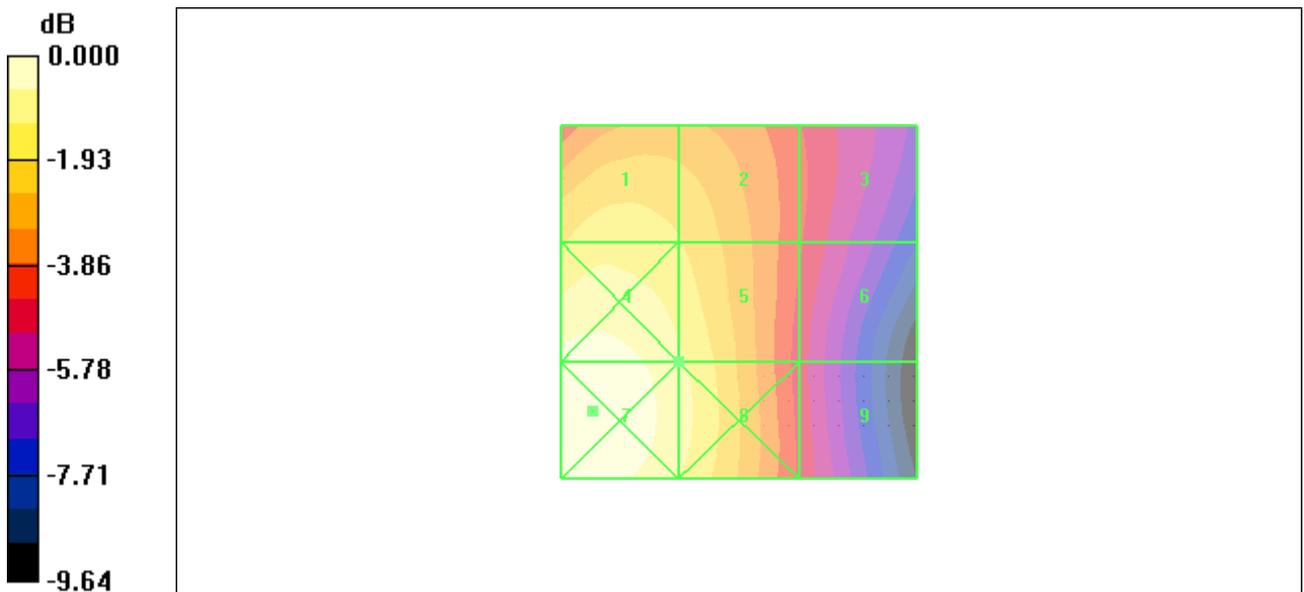

0 dB = 0.160 A/m

**Figure 21 HAC RF H-Field CDMA PCS 1175 Channel**

# TA Technology (Shanghai) Co., Ltd. Test Report

## HAC RF H-Field CDMA PCS Middle Frequency

Date/Time: 10/21/2009 12:38:44 PM

Communication System: CDMA PCS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: H3DV6 - SN6138; ; Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device 3/Hearing Aid Compatibility

**Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.149 A/m

Probe Modulation Factor = 1.00


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.134 A/m; Power Drift = 0.137 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.146 M4</b>	Grid 2 <b>0.139 M4</b>	Grid 3 <b>0.108 M4</b>
Grid 4 <b>0.163 M4</b>	Grid 5 <b>0.149 M4</b>	Grid 6 <b>0.105 M4</b>
Grid 7 <b>0.171 M4</b>	Grid 8 <b>0.152 M4</b>	Grid 9 <b>0.102 M4</b>

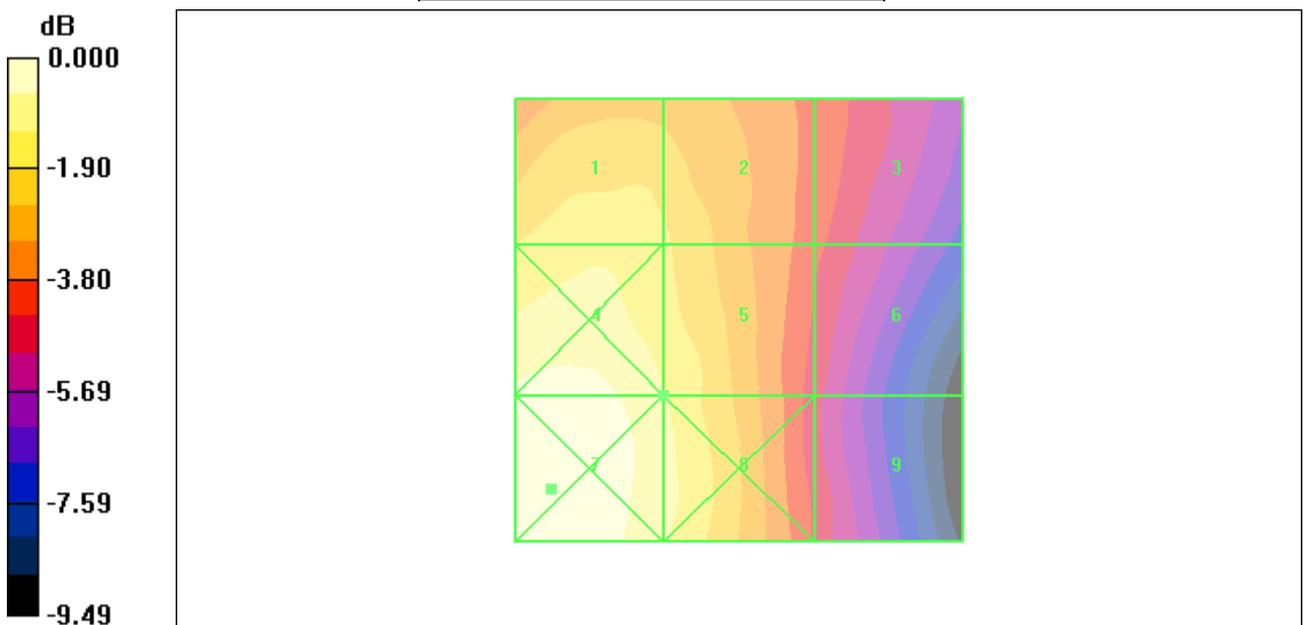

0 dB = 0.171 A/m

**Figure 22 HAC RF H-Field CDMA PCS 600 Channel**

# TA Technology (Shanghai) Co., Ltd. Test Report

## HAC RF H-Field CDMA PCS Low Frequency

Date/Time: 10/21/2009 12:23:39 PM

Communication System: CDMA PCS; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: H3DV6 - SN6138; ; Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.119 A/m

Probe Modulation Factor = 1.00


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.107 A/m; Power Drift = -0.067 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.119 M4</b>	Grid 2 <b>0.110 M4</b>	Grid 3 <b>0.087 M4</b>
Grid 4 <b>0.134 M4</b>	Grid 5 <b>0.119 M4</b>	Grid 6 <b>0.082 M4</b>
Grid 7 <b>0.141 M4</b>	Grid 8 <b>0.123 M4</b>	Grid 9 <b>0.079 M4</b>

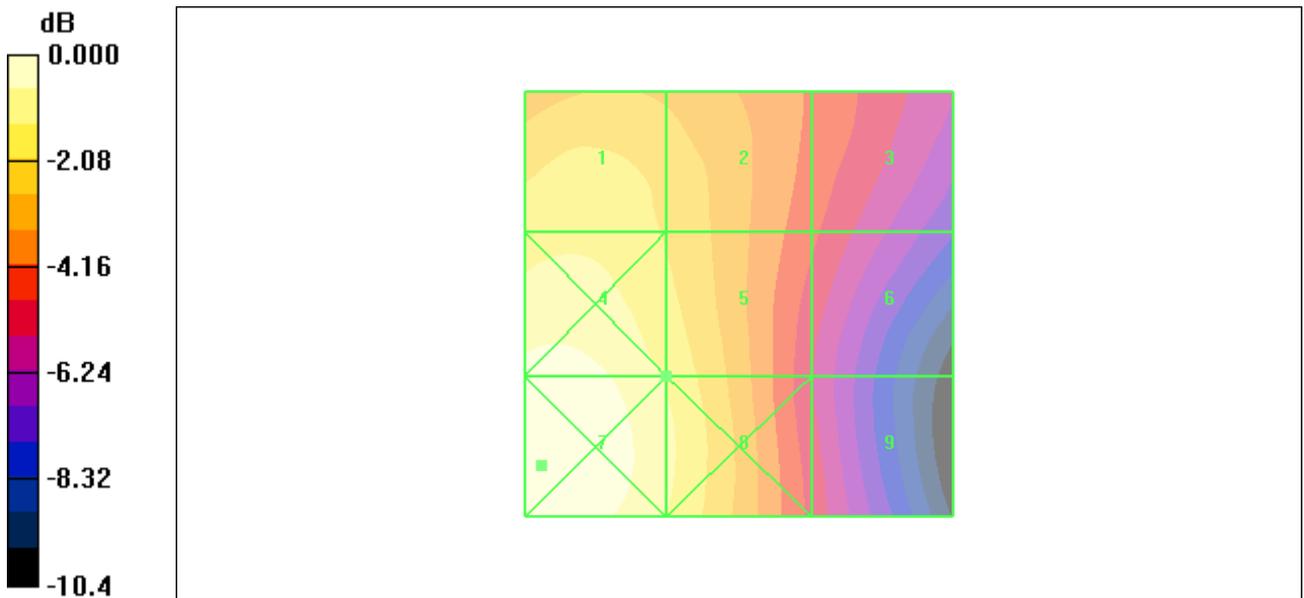

0 dB = 0.141A/m

**Figure 23 HAC RF H-Field CDMA PCS 25 Channel**

**HAC RF E-Field CDMA AWS High Frequency**

Date/Time: 10/20/2009 11:21:35 PM

Communication System: CDMA AWS; Frequency: 1752.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1); Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**E Scan - ER3D - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test**

**(101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 57.8 V/m

Probe Modulation Factor = 1.03


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 60.7 V/m; Power Drift = 0.010 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>37.3 M4</b>	Grid 2 <b>45.1 M4</b>	Grid 3 <b>45.3 M4</b>
Grid 4 <b>44.6 M4</b>	Grid 5 <b>57.8 M4</b>	Grid 6 <b>57.7 M4</b>
Grid 7 <b>49.1 M4</b>	Grid 8 <b>58.8 M4</b>	Grid 9 <b>58.5 M4</b>

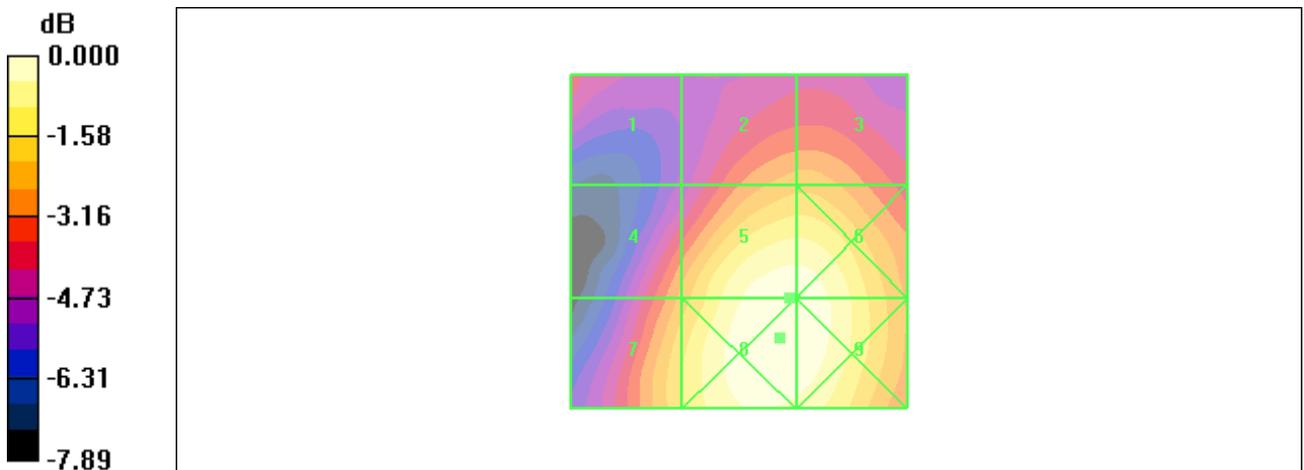

0 dB = 58.8V/m

**Figure 24 HAC RF E-Field CDMA AWS 850 Channel**

**HAC RF E-Field CDMA AWS Middle Frequency**

Date/Time: 10/20/2009 11:26:19 PM

Communication System: CDMA AWS; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1); Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**E Scan - ER3D - 2007: 15 mm from Probe Center to the Device 2/Hearing Aid Compatibility**

**Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 51.9 V/m

Probe Modulation Factor = 1.03


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 54.4 V/m; Power Drift = 0.091 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
<b>34.3 M4</b>	<b>40.8 M4</b>	<b>40.7 M4</b>
Grid 4	Grid 5	Grid 6
<b>39.2 M4</b>	<b>51.9 M4</b>	<b>51.9 M4</b>
Grid 7	Grid 8	Grid 9
<b>43.0 M4</b>	<b>52.6 M4</b>	<b>52.4 M4</b>

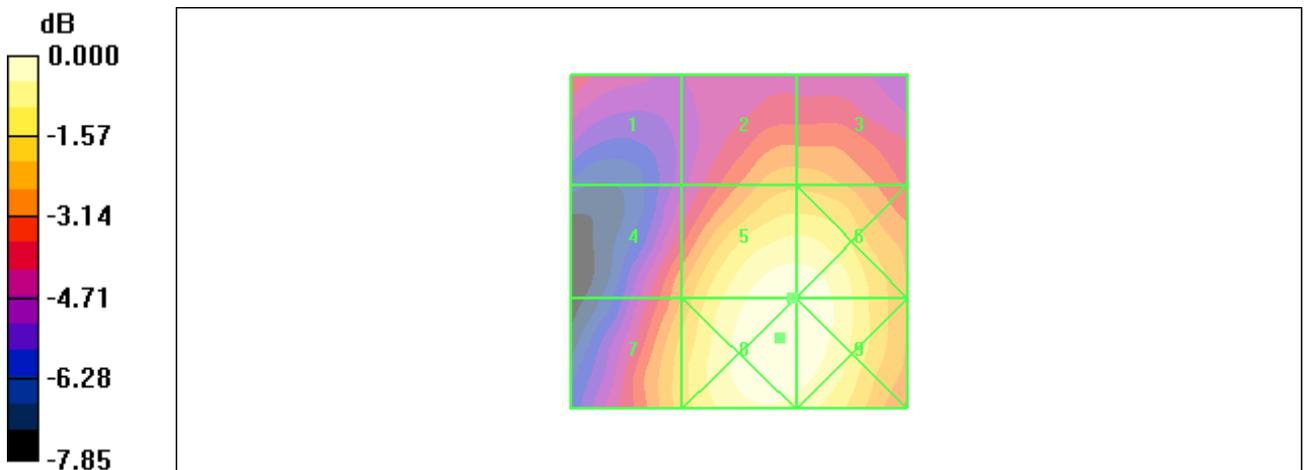

0 dB = 52.6V/m

**Figure 25 HAC RF E-Field CDMA AWS 450 Channel**

**HAC RF E-Field CDMA AWS Low Frequency**

Date/Time: 10/20/2009 11:31:02 PM

Communication System: CDMA AWS; Frequency: 1711.25 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: ER3DV6 - SN2303; ConvF(1, 1, 1); Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**E Scan - ER3D - 2007: 15 mm from Probe Center to the Device 3/Hearing Aid Compatibility**

**Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 41.9 V/m

Probe Modulation Factor = 1.03


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 43.8 V/m; Power Drift = 0.004 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
<b>28.1 M4</b>	<b>32.9 M4</b>	<b>33.0 M4</b>
Grid 4	Grid 5	Grid 6
<b>32.4 M4</b>	<b>41.9 M4</b>	<b>41.9 M4</b>
Grid 7	Grid 8	Grid 9
<b>35.9 M4</b>	<b>42.6 M4</b>	<b>42.4 M4</b>

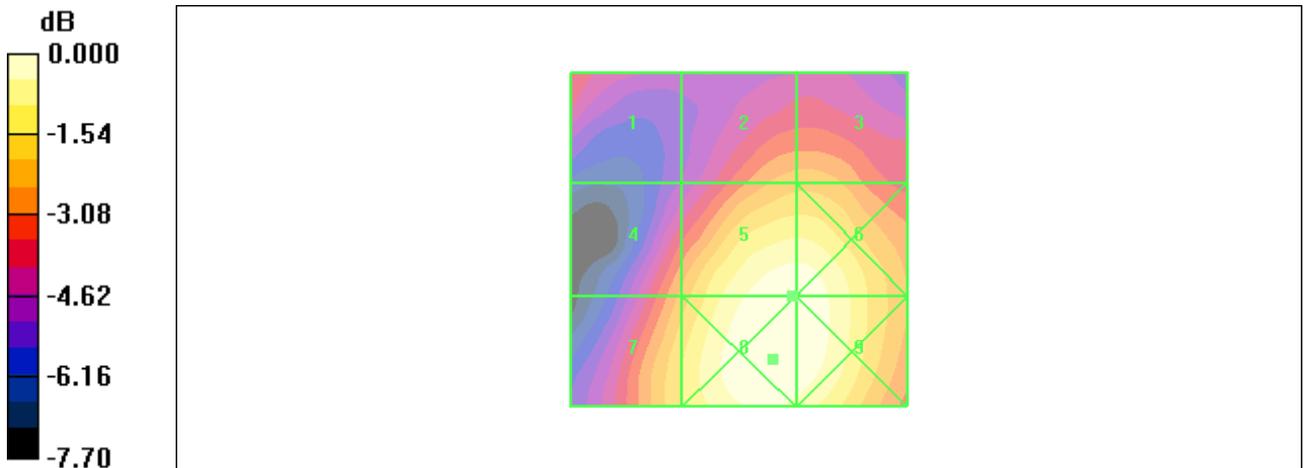

0 dB = 42.6V/m

**Figure 26 HAC RF E-Field CDMA AWS 25 Channel**

# TA Technology (Shanghai) Co., Ltd. Test Report

## HAC RF H-Field CDMA AWS High Frequency

Date/Time: 10/21/2009 10:28:18 AM

Communication System: CDMA AWS; Frequency: 1752.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: H3DV6 - SN6138; ; Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device 2/Hearing Aid Compatibility

**Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.151 A/m

Probe Modulation Factor = 1.01


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.142 A/m; Power Drift = -0.126 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.160 M4</b>	Grid 2 <b>0.149 M4</b>	Grid 3 <b>0.118 M4</b>
Grid 4 <b>0.172 M4</b>	Grid 5 <b>0.151 M4</b>	Grid 6 <b>0.116 M4</b>
Grid 7 <b>0.177 M4</b>	Grid 8 <b>0.151 M4</b>	Grid 9 <b>0.102 M4</b>

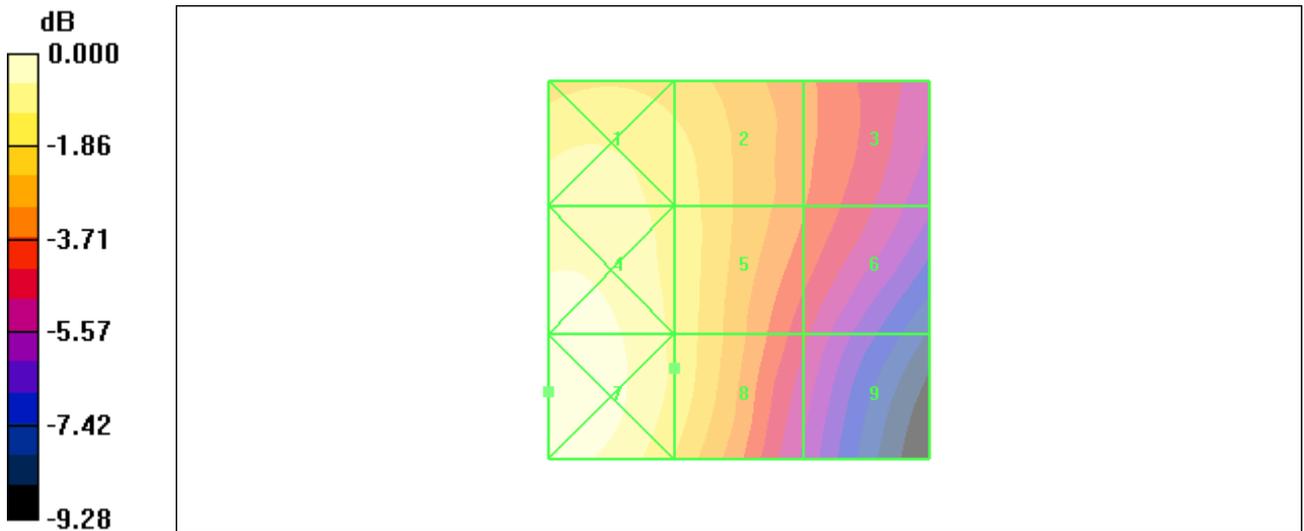

0 dB = 0.177 A/m

**Figure 27 HAC RF H-Field CDMA AWS 850 Channel**

# TA Technology (Shanghai) Co., Ltd. Test Report

## HAC RF H-Field CDMA AWS Middle Frequency

Date/Time: 10/21/2009 10:33:06 AM

Communication System: CDMA AWS; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: H3DV6 - SN6138; ; Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device 3/Hearing Aid Compatibility

**Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.135 A/m

Probe Modulation Factor = 1.01


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.128 A/m; Power Drift = -0.011 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.144 M4</b>	Grid 2 <b>0.135 M4</b>	Grid 3 <b>0.110 M4</b>
Grid 4 <b>0.154 M4</b>	Grid 5 <b>0.135 M4</b>	Grid 6 <b>0.108 M4</b>
Grid 7 <b>0.157 M4</b>	Grid 8 <b>0.134 M4</b>	Grid 9 <b>0.094 M4</b>

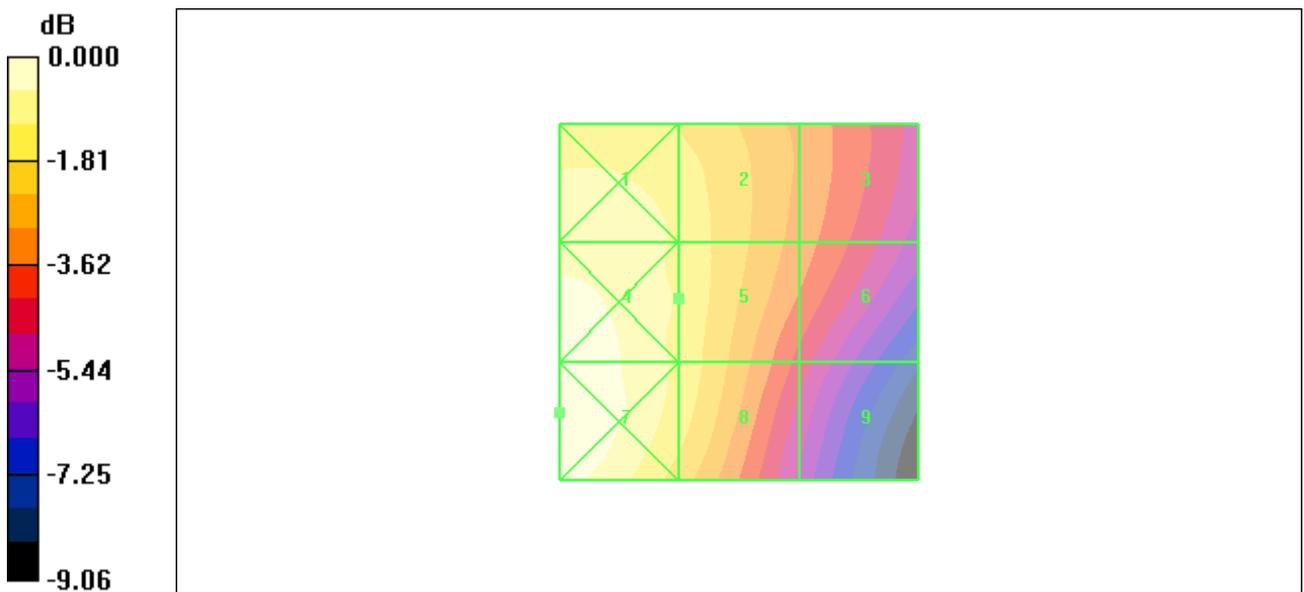

0 dB = 0.157 A/m

**Figure 28 HAC RF H-Field CDMA AWS 450 Channel**

**HAC RF H-Field CDMA AWS Low Frequency**

Date/Time: 10/21/2009 10:23:25 AM

Communication System: CDMA AWS; Frequency: 1711.25 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: RF Section

DASY4 Configuration:

Probe: H3DV6 - SN6138; ; Calibrated: 4/27/2009

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: Not Specified

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**H Scan - H3DV6 - 2007: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test**

**(101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.114 A/m

Probe Modulation Factor = 1.01


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.108 A/m; Power Drift = -0.175 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.123 M4</b>	Grid 2 <b>0.114 M4</b>	Grid 3 <b>0.093 M4</b>
Grid 4 <b>0.129 M4</b>	Grid 5 <b>0.114 M4</b>	Grid 6 <b>0.091 M4</b>
Grid 7 <b>0.131 M4</b>	Grid 8 <b>0.113 M4</b>	Grid 9 <b>0.080 M4</b>

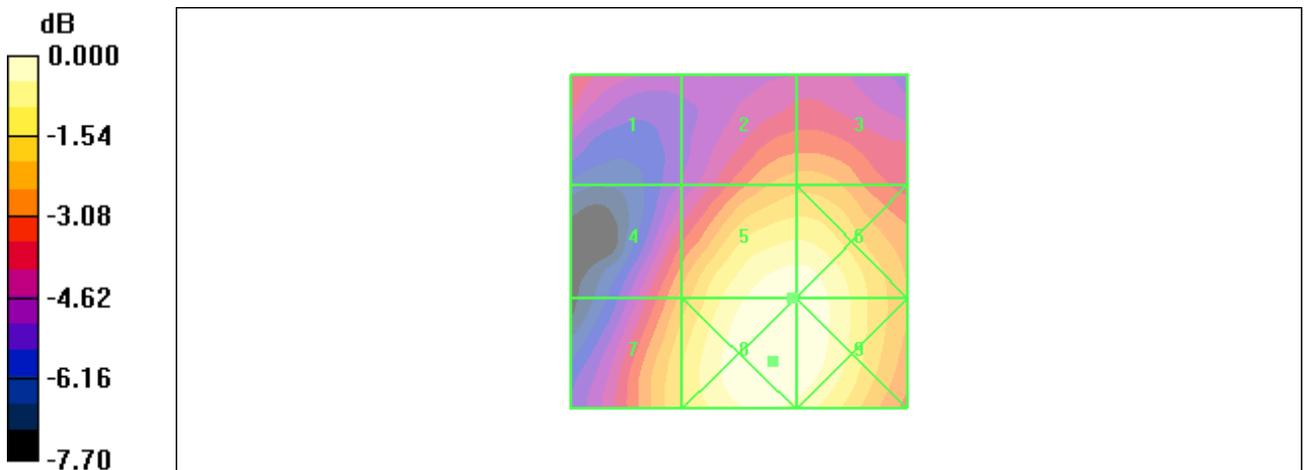

0 dB = 42.6V/m

**Figure 29 HAC RF H-Field CDMA AWS 25 Channel**

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2009-1353HAC

Page 46 of 81

## ANNEX C: E-Probe Calibration Certificate

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA (Auden)**

Certificate No: **ER3-2303\_Apr09**

### CALIBRATION CERTIFICATE

Object: **ER3DV6 - SN:2303**

Calibration procedure(s): **QA CAL-02 v5  
Calibration procedure for E-field probes optimized for close near field  
evaluations in air**

Calibration date: **April 27, 2009**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-09 (No. 217-01027)	Mar-10
Reference Probe ER3DV6	SN: 2326	1-Oct-08 (No. ER3-2326_Oct08)	Oct-09
DAE4	SN: 789	18-Dec-08 (No. DAE4-789_Dec08)	Dec-09
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8948C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-06)	In house check: Oct-09

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: April 27, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2009-1353HAC

Page 47 of 81

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zaughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

NORM <sub>x,y,z</sub>	sensitivity in free space
DCP	diode compression point
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

### Calibration is Performed According to the Following Standards:

- IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  for XY sensors and  $\vartheta = 90$  for Z sensor ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart).
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency.
- Spherical isotropy (3D deviation from isotropy)**: in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

ER3DV6 SN:2303

April 27, 2009

# Probe ER3DV6

## SN:2303

Manufactured:	November 6, 2002
Last calibrated:	December 9, 2002
Recalibrated:	April 27, 2009

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

TA Technology (Shanghai) Co., Ltd.  
Test Report

ER3DV6 SN:2303

April 27, 2009

**DASY - Parameters of Probe: ER3DV6 SN:2303**

Sensitivity in Free Space [ $\mu\text{V}/(\text{V}/\text{m})^2$ ]		Diode Compression <sup>A</sup>	
NormX	1.40 ± 10.1 % (k=2)	DCP X	98 mV
NormY	1.43 ± 10.1 % (k=2)	DCP Y	95 mV
NormZ	1.46 ± 10.1 % (k=2)	DCP Z	99 mV

Frequency Correction

X	0.0
Y	0.0
Z	0.0

Sensor Offset (Probe Tip to Sensor Center)

X	2.5 mm
Y	2.5 mm
Z	2.5 mm

Connector Angle 29 °

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.


<sup>A</sup> numerical linearization parameter: uncertainty not required.

ER3DV6 SN:2303

April 27, 2009

### Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide R22)


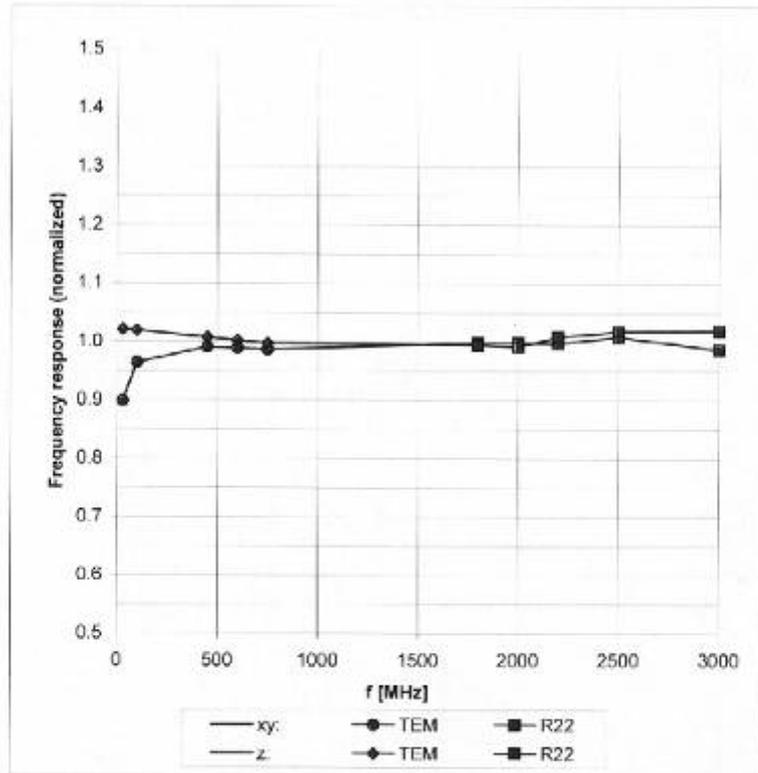


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )



ER3DV6 SN:2303

April 27, 2009

Receiving Pattern ( $\phi$ ),  $\vartheta = 0^\circ$

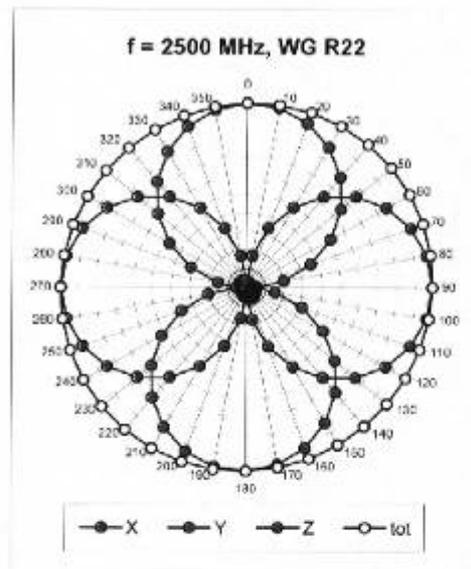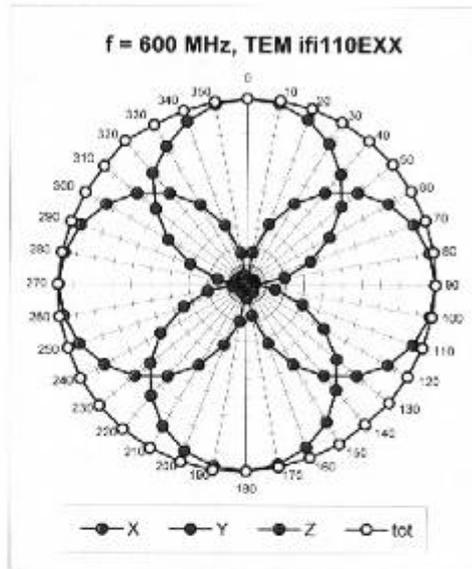


Receiving Pattern ( $\phi$ ),  $\vartheta = 90^\circ$

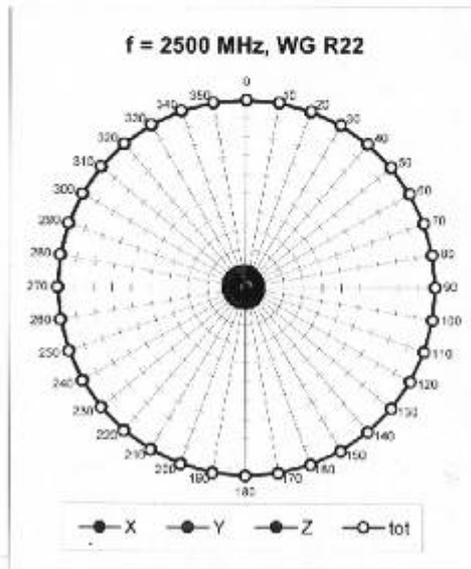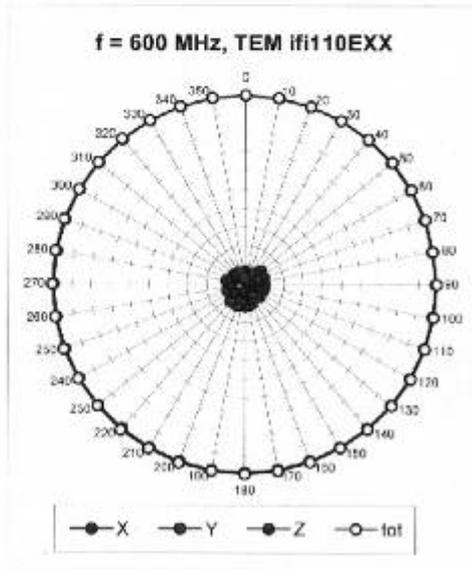

ER3DV6 SN:2303


April 27, 2009

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

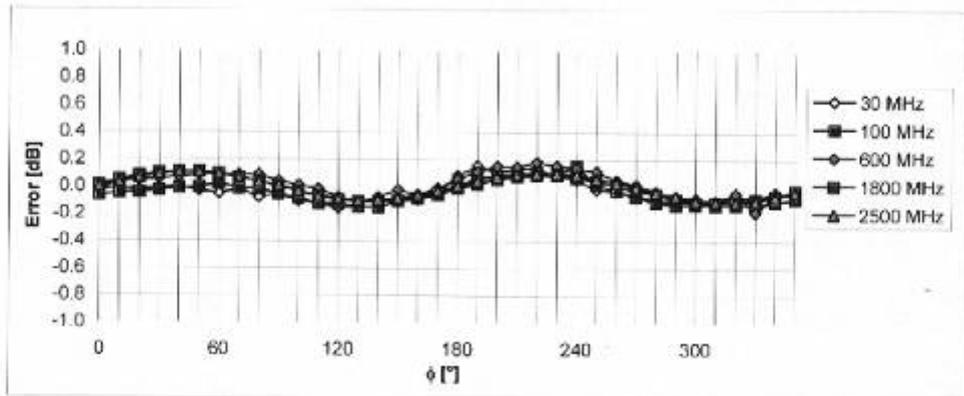

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\vartheta = 90^\circ$


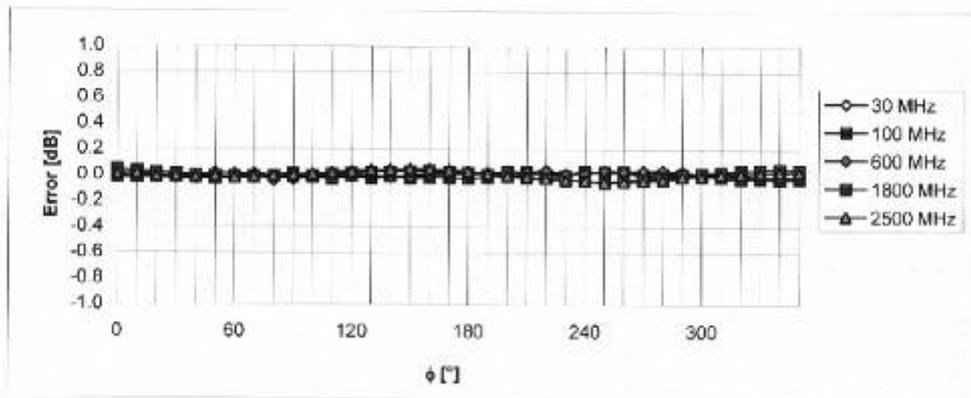


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

ER3DV6 SN:2303

April 27, 2009

### Dynamic Range f(E-field) (Waveguide R22, f = 1800 MHz)

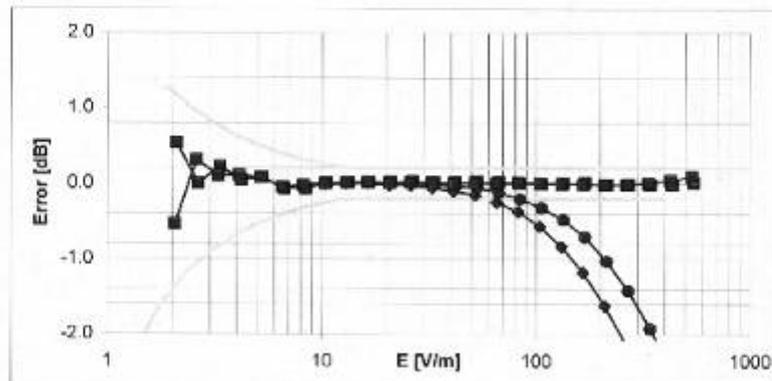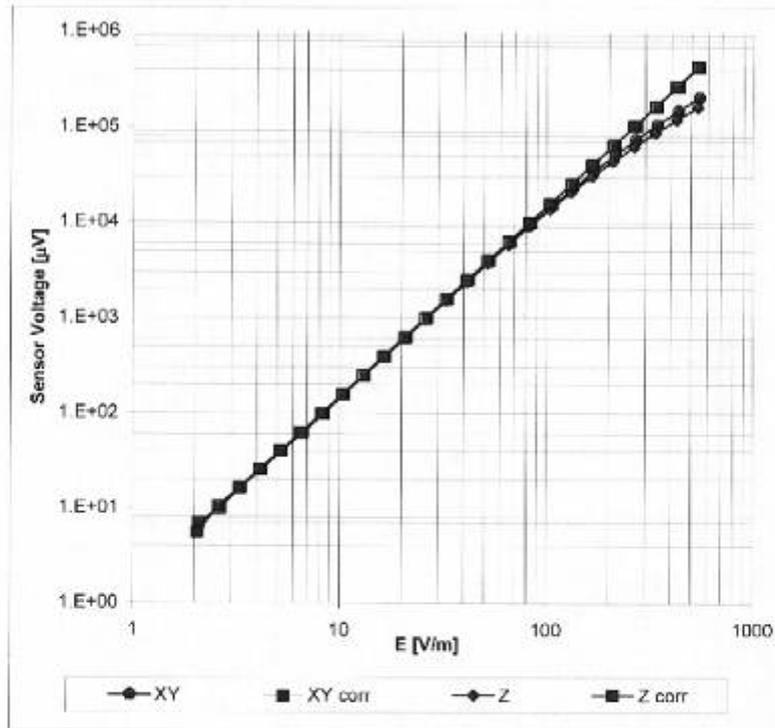


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)

ER3DV6 SN:2303

April 27, 2009

Deviation from Isotropy in Air  
Error ( $\phi, \theta$ ),  $f = 900$  MHz

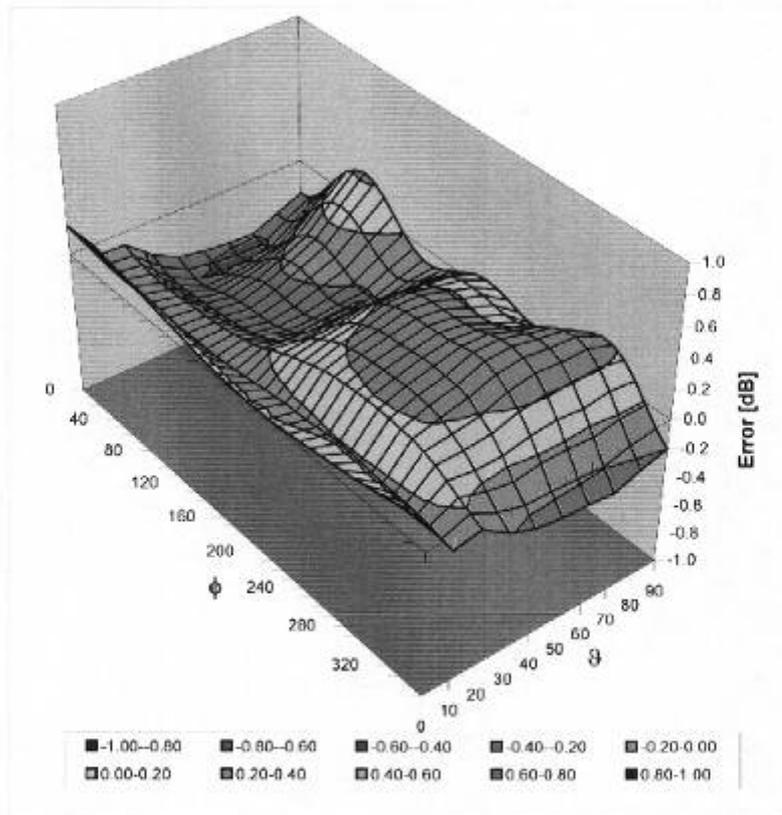

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2009-1353HAC

Page 55 of 81

## ANNEX D: H-Probe Calibration Certificate

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA (Auden)**

Certificate No: **H3-6138\_Apr09**

### CALIBRATION CERTIFICATE

Object: **H3DV6 - SN:6138**

Calibration procedure(s): **QA CAL-03.v5  
Calibration procedure for H-field probes optimized for close near field  
evaluations in air**

Calibration date: **April 27, 2009**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41496277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41496087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5066 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-09 (No. 217-01027)	Mar-10
Reference Probe H3DV6	SN: 6182	1-Oct-08 (No. H3-6182_Oct08)	Oct-09
DAE4	SN: 789	19-Dec-08 (No. DAE4-789_Dec08)	Dec-09
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-09 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: April 27, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2009-1353HAC

Page 56 of 81

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

NORM <sub>x,y,z</sub>	sensitivity in free space
DCP	diode compression point
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

### Calibration is Performed According to the Following Standards:

- IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

### Methods Applied and Interpretation of Parameters:

- $X, Y, Z_{a0a1a2}$ : Assessed for E-field polarization  $\vartheta = 90$  for XY sensors and  $\vartheta = 0$  for Z sensor ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).
- $X, Y, Z(f)_{a0a1a2} = X, Y, Z_{a0a1a2} \cdot \text{frequency\_response}$  (see Frequency Response Chart).
- $DCP_{x,y,z}$ : DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency.
- Spherical isotropy (3D deviation from isotropy)*: in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle*: The angle is assessed using the information gained by determining the  $X_{a0a1a2}$  (no uncertainty required).

H3DV6 SN:6138

April 27, 2009

# Probe H3DV6

## SN:6138

Manufactured:	July 3, 2002
Last calibrated:	December 9, 2002
Recalibrated:	April 27, 2009

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

H3DV6 SN:6138

April 27, 2009

**DASY - Parameters of Probe: H3DV6 SN:6138**

Sensitivity in Free Space [A/m /  $\sqrt{\mu\text{V}}$ ]

	a0	a1	a2
X	2.728E-03	-6.571E-5	-4.297E-6 ± 5.1 % (k=2)
Y	2.925E-03	-2.357E-4	-3.689E-6 ± 5.1 % (k=2)
Z	3.178E-03	-2.445E-4	4.822E-6 ± 5.1 % (k=2)

Diode Compression<sup>1</sup>

DCP X	89 mV
DCP Y	89 mV
DCP Z	85 mV

Sensor Offset (Probe Tip to Sensor Center)

X	3.0 mm
Y	3.0 mm
Z	3.0 mm

Connector Angle -237 °

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.


<sup>1</sup> numerical linearization parameter: uncertainty not required

H3DV6 SN:6138

April 27, 2009

### Frequency Response of H-Field

(TEM-Cell:ifi110 EXX, Waveguide R22)


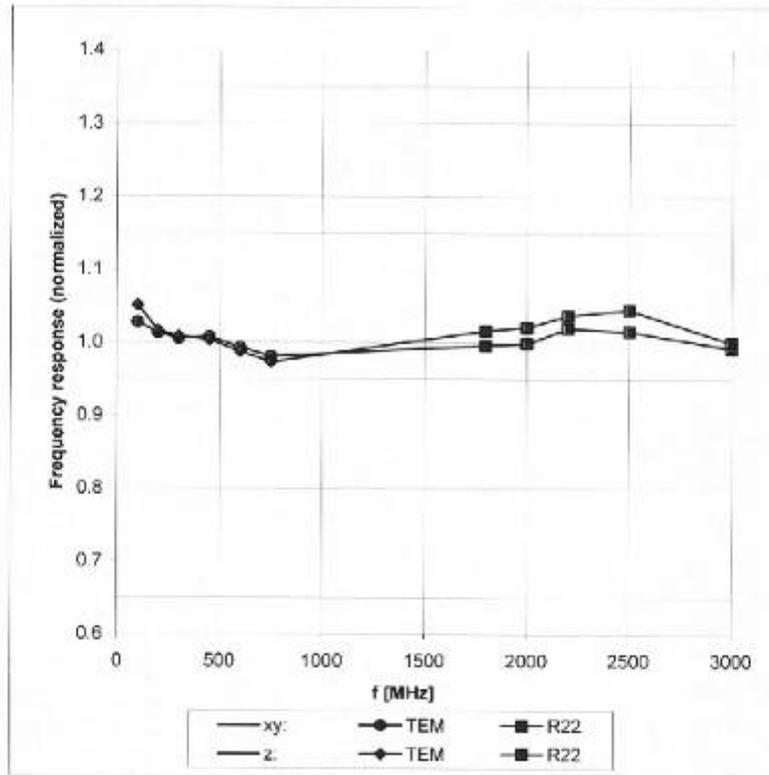


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )



H3DV6 SN:6138

April 27, 2009

Receiving Pattern ( $\phi$ ),  $\vartheta = 90^\circ$

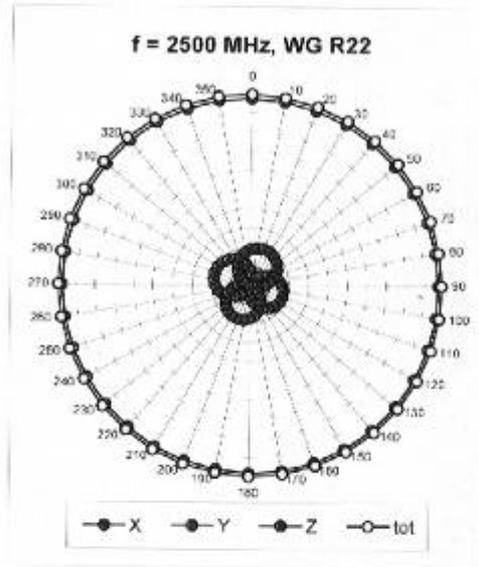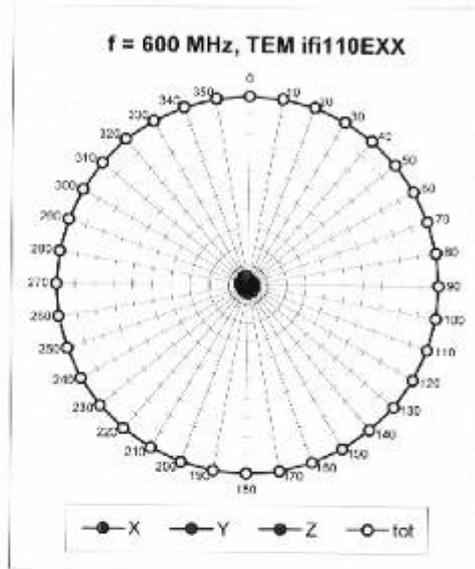


Receiving Pattern ( $\phi$ ),  $\vartheta = 0^\circ$

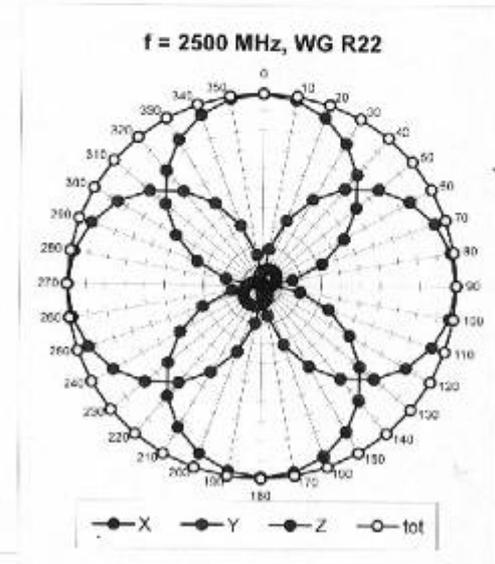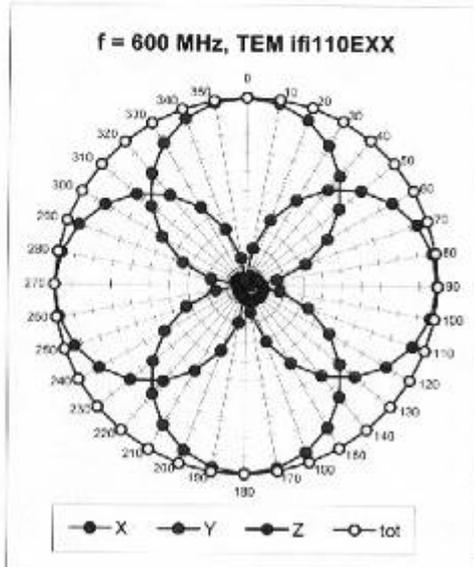

H3DV6 SN:6138


April 27, 2009

### Receiving Pattern ( $\phi$ ), $\vartheta = 90^\circ$

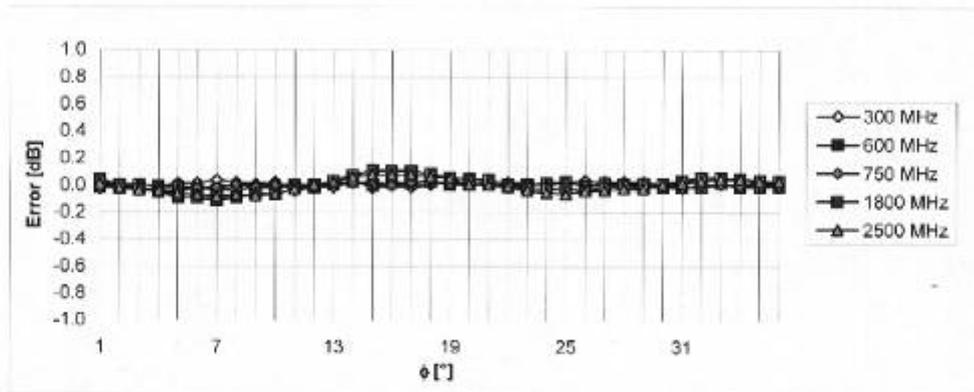

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$


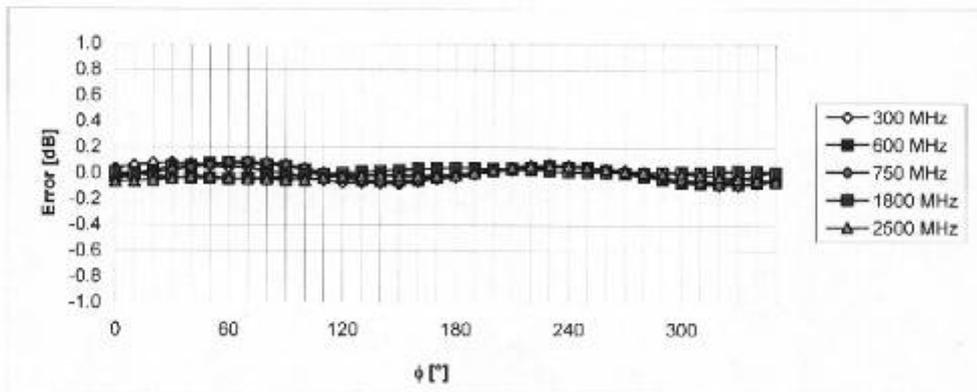


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

H3DV6 SN:6138

April 27, 2009

### Dynamic Range f(H-field) (Waveguide R22, f = 1800 MHz)

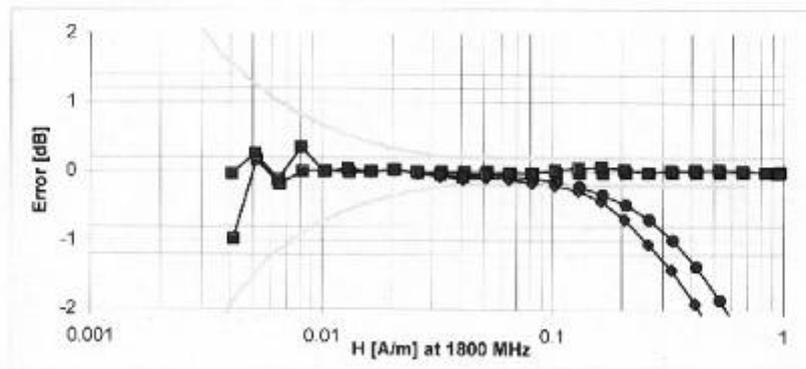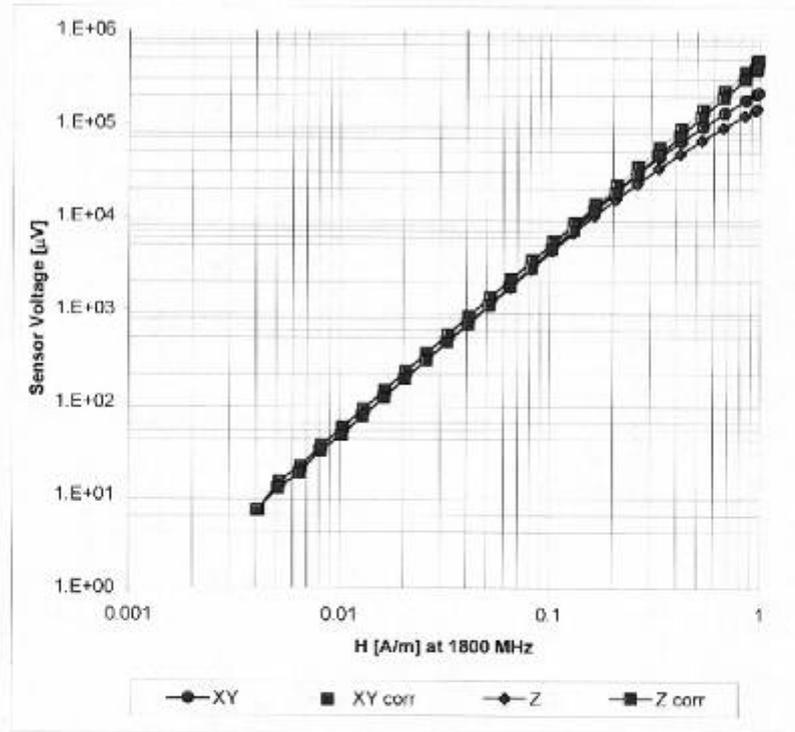


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)

H3DV6 SN:6138

April 27, 2009

**Deviation from Isotropy in Air**  
**Error ( $\phi, \theta$ ),  $f = 900$  MHz**

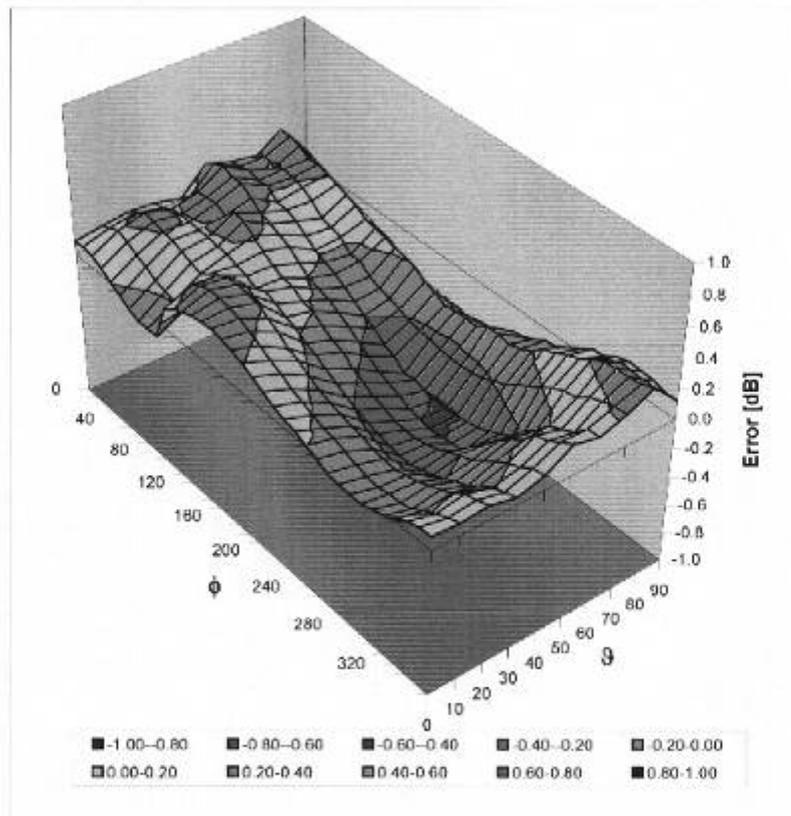

**Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )**

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2009-1353HAC

Page 64 of 81

## ANNEX E: CD835V3 Dipole Calibration Certificate(S/N1133)

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA Technology (Auden)**

Certificate No: **CD835V3-1133\_Apr09**

### CALIBRATION CERTIFICATE

Object: **CD835V3 - SN: 1133**

Calibration procedure(s): **QA CAL-20.v4  
Calibration procedure for dipoles in air**

Calibration date: **April 22, 2009**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	08-Oct-08 (No. 217-00898)	Oct-09
Power sensor HP 8461A	US37292783	08-Oct-08 (No. 217-00898)	Oct-09
Probe ER3DV6	SN: 2336	22-Dec-08 (No. ER3-2336_Dec08)	Dec-09
Probe H3DV6	SN: 6065	22-Dec-08 (No. H3-6065_Dec08)	Dec-09
DAE4	SN: 781	20-Feb-09 (No. DAE4-781_Feb09)	Feb-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter R&S NRP	SN: 101748	23-Sep-08 (in house check Dec-08)	In house check: Dec-10
Power sensor R&S NRP-Z91	SN: 100711	25-Aug-08 (in house check Dec-08)	In house check: Dec-10
Power sensor R&S NRP-Z91	SN: 100712	25-Aug-08 (in house check Dec-08)	In house check: Dec-10
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-08)	In house check: Oct-09
RF generator E4433B	MY 41310391	03-Nov-04 (in house check Oct-07)	In house check: Oct-09

Calibrated by: **Name: Mike Mell, Function: Laboratory Technician, Signature: [Signature]**

Approved by: **Name: Fin Bombolt, Function: Technical Director, Signature: [Signature]**

Issued: April 24, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zoughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

#### References

- [1] ANSI-C63.19-2006  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

#### Methods Applied and Interpretation of Parameters:

- **Coordinate System:** y-axis is in the direction of the dipole arms, z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms, x-axis is normal to the other axes. In coincidence with the standards [1, 2], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm above the top edge of the dipole arms.
- **Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- **Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY4 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- **Feed Point Impedance and Return Loss:** These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminated by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- **E-field distribution:** E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1, 2], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (in z) above the top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, 10mm above the dipole surface.
- **H-field distribution:** H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

### 1 Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7 B80
DASY PP Version	SEMCAD	V1.8 B186
Phantom	HAC Test Arch	SD HAC P01 BA, #1070
Distance Dipole Top - Probe Center	10 mm	
Scan resolution	dx, dy = 5 mm	area = 20 x 180 mm
Frequency	835 MHz ± 1 MHz	
Forward power at dipole connector	20.0 dBm = 100mW	
Input power drift	< 0.05 dB	

### 2 Maximum Field values

H-field 10 mm above dipole surface	condition	interpolated maximum
Maximum measured	100 mW forward power	<b>0.446 A/m</b>

Uncertainty for H-field measurement: 8.2% (k=2)

E-field 10 mm above dipole surface	condition	interpolated maximum
Maximum measured above high end-	100 mW forward power	158.2 V/m
Maximum measured above low end	100 mW forward power	157.3 V/m
Averaged maximum above arm	100 mW forward power	<b>157.8 V/m</b>

Uncertainty for E-field measurement: 12.8% (k=2)

### 3 Appendix

#### 3.1 Antenna Parameters

Frequency	Return Loss	Impedance
800 MHz	16.2 dB	( 43.3 - j12.9 ) Ohm
<b>835 MHz</b>	<b>33.2 dB</b>	<b>( 49.3 + j2.1 ) Ohm</b>
900 MHz	17.4 dB	( 53.5 - j13.6 ) Ohm
950 MHz	20.0 dB	( 44.3 + j7.5 ) Ohm
960 MHz	14.8 dB	( 53.2 + j18.8 ) Ohm

#### 3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.


The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

3.3 Measurement Sheets

3.3.1 Return Loss and Smith Chart

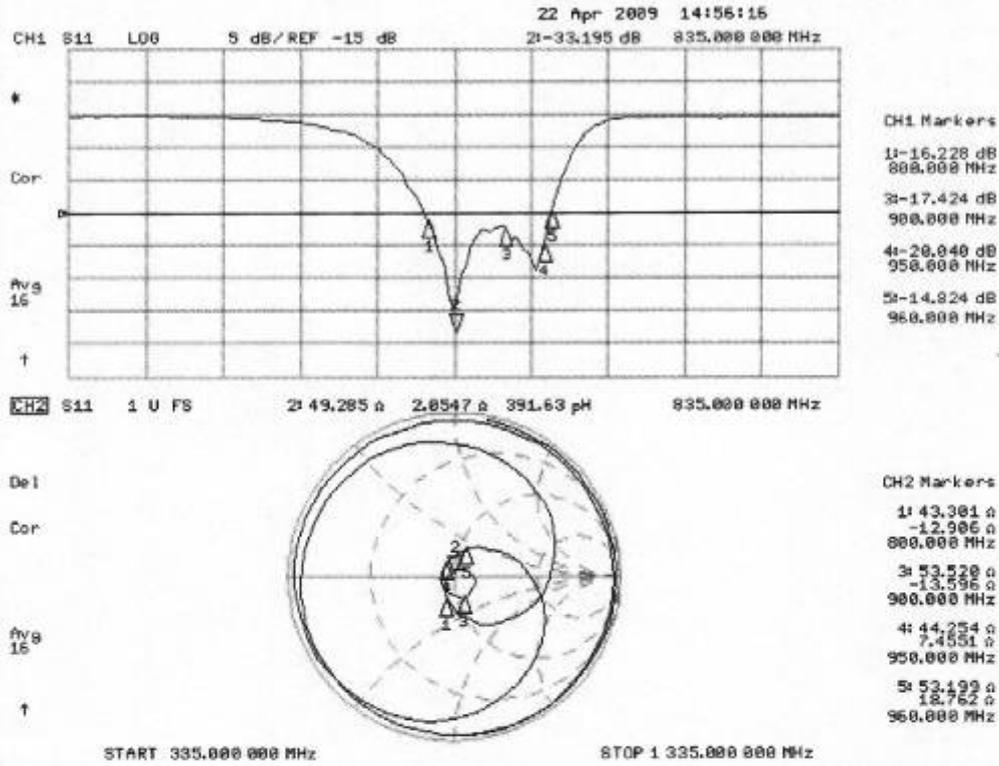

**3.3.2 DASY4 H-field Result**

Date/Time: 21.04.2009 13:38:21

Test Laboratory: SPEAG Lab 2

**DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1133**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Phantom section: RF Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6065; ; Calibrated: 22.12.2008
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 20.02.2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**H Scan - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):**

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.446 A/m

Probe Modulation Factor = 1.00


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.472 A/m; Power Drift = -0.006 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.364 M4	0.385 M4	0.368 M4
Grid 4	Grid 5	Grid 6
0.417 M4	0.446 M4	0.426 M4
Grid 7	Grid 8	Grid 9
0.365 M4	0.393 M4	0.376 M4

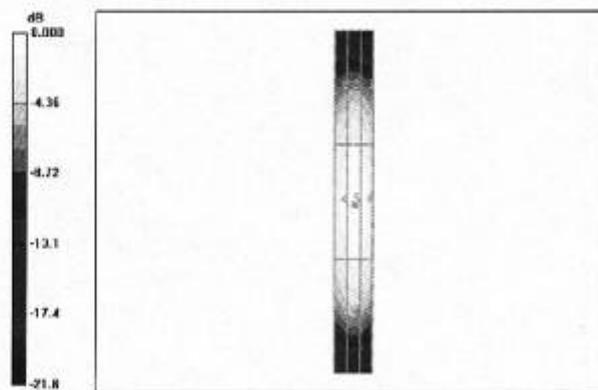

0 dB = 0.446A/m

**3.3.3 DASY4 E-field Result**

Date/Time: 22.04.2009 12:51:53

Test Laboratory: SPEAG Lab 2

**DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1133**  
 Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: RF Section  
 Measurement Standard: DASY4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 22.12.2008
- Sensor-Surface: (Fix Surface)
- Electronics: DAB4 Sn781; Calibrated: 20.02.2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**E Scan - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):**  
 Measurement grid: dx=5mm, dy=5mm  
 Maximum value of peak Total field = 158.2 V/m  
 Probe Modulation Factor = 1.00  
 Device Reference Point: 0.000, 0.000, -6.30 mm  
 Reference Value = 105.8 V/m; Power Drift = -0.013 dB  
**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
152.4 M4	158.2 M4	154.6 M4
Grid 4	Grid 5	Grid 6
84.6 M4	86.9 M4	84.2 M4
Grid 7	Grid 8	Grid 9
151.7 M4	157.3 M4	152.4 M4

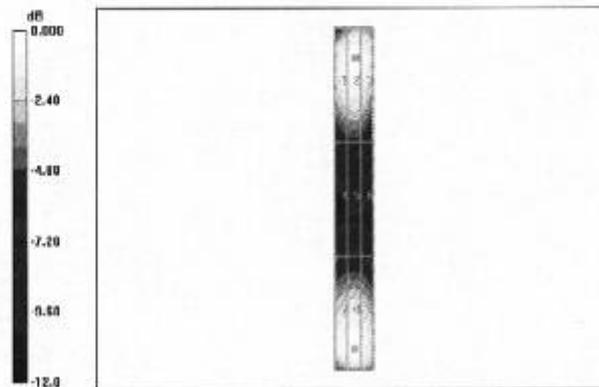

0 dB = 158.2V/m

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2009-1353HAC

Page 70 of 81

## ANNEX F: CD1880V3 Dipole Calibration Certificate(S/N1115)

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA Technology (Auden)**

Certificate No: **CD1880V3-1115\_Apr09**

### CALIBRATION CERTIFICATE

Object: **CD1880V3 - SN: 1115**

Calibration procedure(s): **QA CAL-20.v4  
Calibration procedure for dipoles in air**

Calibration date: **April 22, 2009**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	08-Oct-08 (No. 217-00898)	Oct-09
Power sensor HP 8481A	US37282783	08-Oct-08 (No. 217-00898)	Oct-09
Probe ER3DV6	SN: 2336	22-Dec-08 (No. ER3-2336_Dec08)	Dec-09
Probe H3DV6	SN: 6065	22-Dec-08 (No. H3-6065_Dec08)	Dec-09
DAE4	SN 781	20-Feb-09 (No. DAE4-781_Feb09)	Feb-10

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter R&S NRP	SN: 101748	23-Sep-08 (in house check Dec-08)	In house check: Dec-10
Power sensor R&S NRP-Z91	SN: 100711	25-Aug-08 (in house check Dec-08)	In house check: Dec-10
Power sensor R&S NRP-Z91	SN: 100712	25-Aug-08 (in house check Dec-08)	In house check: Dec-10
Network Analyzer HP 8753E	US37390586	18-Oct-01 (in house check Oct-08)	In house check: Oct-09
RF generator E4433B	MY 41310391	22-Nov-04 (in house check Oct-07)	In house check: Oct-09

Calibrated by: **Name: Mike Mehl, Function: Laboratory Technician, Signature: [Signature]**

Approved by: **Name: Fin Bomholt, Function: Technical Director, Signature: [Signature]**

Issued: April 24, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**References**

- [1] ANSI-C63.19-2006  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

**Methods Applied and Interpretation of Parameters:**

- *Coordinate System:* y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1, 2], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm above the top edge of the dipole arms.
- *Measurement Conditions:* Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- *Antenna Positioning:* The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY4 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- *Feed Point Impedance and Return Loss:* These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminated by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- *E-field distribution:* E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1, 2], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (in z) above the top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, 10mm above the dipole surface.
- *H-field distribution:* H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

### 1. Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7 B80
DASY PP Version	SEMCAD	V1.8 B186
Phantom	HAC Test Arch	SD HAC P01 BA, #1070
Distance Dipole Top - Probe Center	10 mm	
Scan resolution	dx, dy = 5 mm	area = 20 x 90 mm
Frequency	1880 MHz ± 1 MHz	
Forward power at dipole connector	20.0 dBm = 100mW	
Input power drift	< 0.05 dB	

### 2. Maximum Field values

H-field 10 mm above dipole surface	condition	Interpolated maximum
Maximum measured	100 mW forward power	0.468 A/m

Uncertainty for H-field measurement: 8.2% (k=2)

E-field 10 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW forward power	140.5 V/m
Maximum measured above low end	100 mW forward power	138.2 V/m
Averaged maximum above arm	100 mW forward power	139.4 V/m

Uncertainty for E-field measurement: 12.8% (k=2)

### 3. Appendix

#### 3.1 Antenna Parameters

Frequency	Return Loss	Impedance
1710 MHz	24.0 dB	( 52.4 + j6.0 ) Ohm
<b>1880 MHz</b>	<b>21.4 dB</b>	<b>( 46.8 + j7.6 ) Ohm</b>
1900 MHz	22.4 dB	( 48.1 + j7.2 ) Ohm
1950 MHz	30.1 dB	( 50.1 + j3.1 ) Ohm
2000 MHz	18.4 dB	( 40.5 + j5.4 ) Ohm

#### 3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.


The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

3.3 Measurement Sheets

3.3.1 Return Loss and Smith Chart

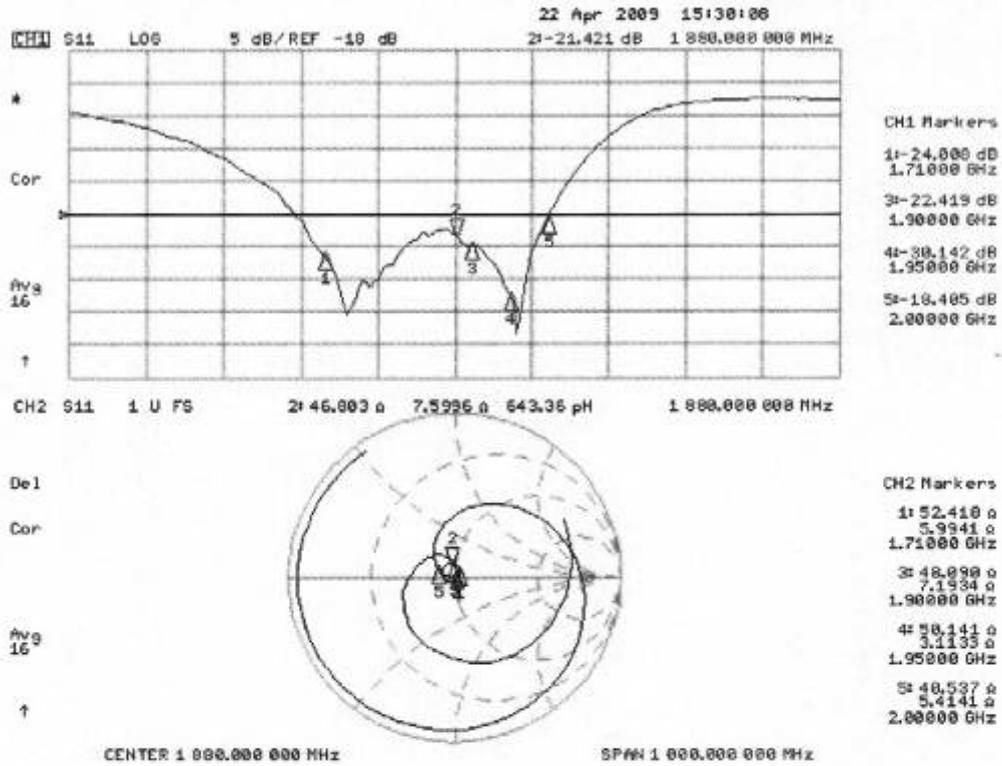

**3.3.2 DASY4 H-Field Result**

Date/Time: 21.04.2009 16:14:56

Test Laboratory: SPEAG Lab 2

**DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1115**  
 Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom section: RF Section  
 Measurement Standard: DASY4 (High Precision Assessment)


DASY4 Configuration:

- Probe: H3DV6 - SN6065; Calibrated: 22.12.2008
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 20.02.2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**H Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):**  
 Measurement grid: dx=5mm, dy=5mm  
 Maximum value of peak Total field = 0.468 A/m  
 Probe Modulation Factor = 1.00  
 Device Reference Point: 0.000, 0.000, -6.30 mm  
 Reference Value = 0.497 A/m; Power Drift = -0.028 dB  
**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.410 M2	0.428 M2	0.405 M2
Grid 4	Grid 5	Grid 6
0.448 M2	0.468 M2	0.442 M2
Grid 7	Grid 8	Grid 9
0.409 M2	0.430 M2	0.403 M2

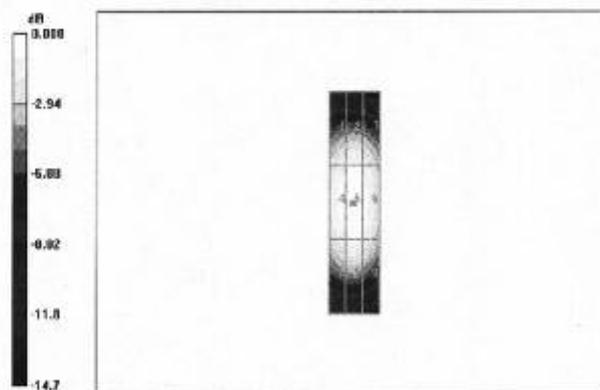

0 dB = 0.468A/m

**3.3.3 DASY4 E-Field Result**

Date/Time: 22.04.2009 15:33:14

Test Laboratory: SPEAG Lab 2

DUT: **HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1115**  
 Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: RF Section  
 Measurement Standard: DASY4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 22.12.2008
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 20.02.2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**E Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):**  
 Measurement grid: dx=5mm, dy=5mm  
 Maximum value of peak Total field = 140.5 V/m  
 Probe Modulation Factor = 1.00  
 Device Reference Point: 0.000, 0.000, -6.30 mm  
 Reference Value = 157.9 V/m; Power Drift = 0.005 dB  
**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
133.8 M2	138.2 M2	134.2 M2
Grid 4	Grid 5	Grid 6
90.3 M3	92.5 M3	88.2 M3
Grid 7	Grid 8	Grid 9
132.9 M2	140.5 M2	137.0 M2

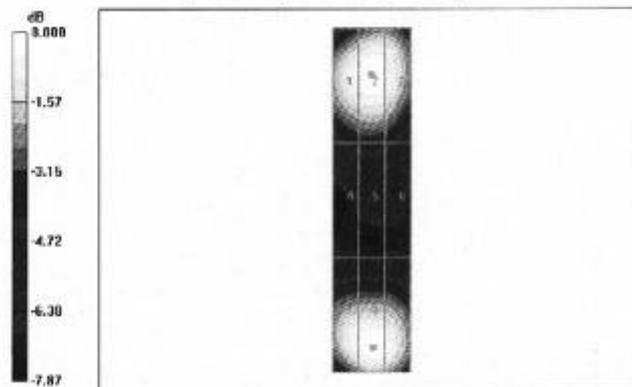

0 dB = 140.5V/m

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2009-1353HAC

Page 76 of 81

### ANNEX G: DAE4 Calibration Certificate

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Auden**

Certificate No: **DAE4-452\_Nov08**

#### CALIBRATION CERTIFICATE

Object: **DAE4 - SD 000 D04 BJ - SN: 452**

Calibration procedure(s): **QA CAL-06.v12  
 Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **November 18, 2008**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Fluke Process Calibrator Type 702	SN: 6295803	30-Sep-08 (No: 7673)	Sep-09
Keithley Multimeter Type 2001	SN: 0810278	30-Sep-08 (No: 7670)	Sep-09
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS 006 AB 1004	06-Jun-08 (in house check)	In house check: Jun-09

	Name	Function	Signature
Calibrated by:	Dominique Steffen	Technician	
Approved by:	Fin Bomholt	R&D Director	

Issued: November 18, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

### Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
  - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
  - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
  - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
  - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - *Input resistance:* DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
  - *Power consumption:* Typical value for information. Supply currents in various operating modes.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2009-1353HAC

Page 78of 81

### DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 $\mu$ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.585 $\pm$ 0.1% (k=2)	404.416 $\pm$ 0.1% (k=2)	404.565 $\pm$ 0.1% (k=2)
Low Range	3.97854 $\pm$ 0.7% (k=2)	3.95135 $\pm$ 0.7% (k=2)	3.98063 $\pm$ 0.7% (k=2)

### Connector Angle

Connector Angle to be used in DASY system	148 $^{\circ}$ $\pm$ 1 $^{\circ}$
---	-----------------------------------

# TA Technology (Shanghai) Co., Ltd.

## Test Report

### Appendix

#### 1. DC Voltage Linearity

High Range	Input ( $\mu\text{V}$ )	Reading ( $\mu\text{V}$ )	Error (%)
Channel X + Input	200000	200000	0.00
Channel X + Input	20000	20006.89	0.03
Channel X - Input	20000	-20003.71	0.02
Channel Y + Input	200000	200000.5	0.00
Channel Y + Input	20000	20008.05	0.04
Channel Y - Input	20000	-20006.61	0.03
Channel Z + Input	200000	199999.6	0.00
Channel Z + Input	20000	20006.84	0.03
Channel Z - Input	20000	-20004.66	0.02

Low Range	Input ( $\mu\text{V}$ )	Reading ( $\mu\text{V}$ )	Error (%)
Channel X + Input	2000	2000	0.00
Channel X + Input	200	200.19	0.09
Channel X - Input	200	-199.99	0.00
Channel Y + Input	2000	2000	0.00
Channel Y + Input	200	199.38	-0.31
Channel Y - Input	200	-200.73	0.36
Channel Z + Input	2000	2000.1	0.00
Channel Z + Input	200	199.25	-0.38
Channel Z - Input	200	-201.52	0.76

#### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading ( $\mu\text{V}$ )	Low Range Average Reading ( $\mu\text{V}$ )
Channel X	200	2.99	1.90
	- 200	-1.54	-1.85
Channel Y	200	-8.82	-8.73
	- 200	6.90	6.96
Channel Z	200	9.94	10.21
	- 200	-13.53	-13.21

#### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X ( $\mu\text{V}$ )	Channel Y ( $\mu\text{V}$ )	Channel Z ( $\mu\text{V}$ )
Channel X	200	-	1.31	-0.98
Channel Y	200	1.52	-	2.97
Channel Z	200	-1.16	0.18	-

# TA Technology (Shanghai) Co., Ltd.

## Test Report

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16123	16646
Channel Y	15886	16452
Channel Z	16175	16346

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M $\Omega$

	Average ( $\mu$ V)	min. Offset ( $\mu$ V)	max. Offset ( $\mu$ V)	Std. Deviation ( $\mu$ V)
Channel X	0.53	-0.80	1.64	0.33
Channel Y	-1.51	-2.67	-0.89	0.35
Channel Z	-1.99	-3.07	-1.43	0.29

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

#### 7. Input Resistance

	Zeroing (MOhm)	Measuring (MOhm)
Channel X	0.1999	198.3
Channel Y	0.1999	200.1
Channel Z	0.1999	199.3

#### 8. Low Battery Alarm Voltage (verified during pre test)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

#### 9. Power Consumption (verified during pre test)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.0	+6	+14
Supply (- Vcc)	-0.01	-8	-9