

FCC Radio Test Report

FCC ID: QISMHA-L29

This report concerns (check one): Original Grant Class II Change

Project No. : 1607C287
Equipment : Smart Phone
Model Name : MHA-L29
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : Jul. 28, 2016
Date of Test : Jul. 28, 2016 ~ Aug. 16, 2016
Issued Date : Aug. 18, 2016
Tested by : BTL Inc.

Testing Engineer : Shawn Xiao
(Shawn Xiao)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3 . GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 EUT TEST CONDITIONS	13
4.1.7 TEST RESULTS	13
4.1 RADIATED EMISSION MEASUREMENT	14
4.1.1 RADIATED EMISSION LIMITS	14
4.1.2 TEST PROCEDURE	15
4.1.3 DEVIATION FROM TEST STANDARD	15
4.1.4 TEST SETUP	15
4.1.5 EUT OPERATING CONDITIONS	16
4.1.6 EUT TEST CONDITIONS	16
4.1.7 TEST RESULTS (9K TO 30MHz)	17
4.1.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	17
4.1.9 TEST RESULTS (ABOVE 1000 MHz)	17
5 . MEASUREMENT INSTRUMENTS LIST	18
ATTACHMENT A - CONDUCTED EMISSION	19
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	26
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	30
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	79

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1607C287	Original Issue.	Aug. 18, 2016

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : MHA-L29
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : Jul. 28, 2016 ~ Aug. 16, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1607C287) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E			
Standard(s) Section	Test Item	Judgment	Remark
15.407(a)	Radiated Emissions	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.
BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.
The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone	
Brand Name	HUAWEI	
Model Name	MHA-L29	
Mode Different	N/A	
Product Description	Operation Frequency	UNII-1: 5150-5250MHz UNII-2A: 5250-5350MHz UNII-2C: 5470-5725MHz UNII-3: 5725-5850MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	433.3Mbps
Software Version	M300-L29C900B095	
Hardware version	HL1AMHAM	
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) DONGGUAN PHITEK ELECTRONICS CO.,LTD. (2) SHENZHEN HUNTKEY ELECTRONIC CO.,LTD. (3) Salcomp (Shenzhen)Co.,Ltd Model: HW-050450E00 (EU) HW-050450A00 (AU) HW-050450B00 (UK) HW-050450U00 (US) #2 Supplied from battery.	
Power Rating	#1 I/P: ~100V-240V-5V 0.75A O/P: 5V \equiv 2A/5A #2 DC +3.82V	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
-

Item	Mfr/Brand	Model.
Battery	Sunwoda Electronic Co., LTD	HB396689ECW
	SCUD (FUJIAN) Electronics Co., Ltd	
	Desay Battery Co., Ltd.	
USB Cable	Kangrui Electronics (shenzhen) Co., Ltd.	801-CD-U0412-1262
	LUXSHARE-ICT Co., Ltd.	L99UC018-CS-H
	Chang Shu Honglin Technology Co.,Ltd.	130-27309
Earphone	JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD	MEMD1632B580C00
	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD	1311-3291-3.5mm-229
	MERRY ELECTRONICS (SHENZHEN) CO., LTD.	EMC309-001

3. Channel List:

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-3		UNII-3		UNII-3	
\Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX A Mode/ CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode/ CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode/ CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 8	TX N20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N40 Mode/ CH54, CH62 (UNII-2A)
Mode 10	TX AC20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 11	TX AC40 Mode/ CH54, CH62 (UNII-2A)
Mode 12	TX AC80 Mode / CH58 (UNII-2A)
Mode 13	TX A Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 14	TX N20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 15	TX N40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 16	TX AC20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 17	TX AC40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 18	TX AC80 Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 20	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 21	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 22	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC80 Mode / CH155 (UNII-3)


The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode/ CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode/ CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode/ CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 8	TX N20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N40 Mode/ CH54, CH62 (UNII-2A)
Mode 10	TX AC20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 11	TX AC40 Mode/ CH54, CH62 (UNII-2A)
Mode 12	TX AC80 Mode / CH58 (UNII-2A)
Mode 13	TX A Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 14	TX N20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 15	TX N40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 16	TX AC20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 17	TX AC40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 18	TX AC80 Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 20	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 21	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 22	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC80 Mode / CH155 (UNII-3)

Note:

(1) For radiated below 1GHz test, the 802.11a mode is found to be the worst case and recorded.

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

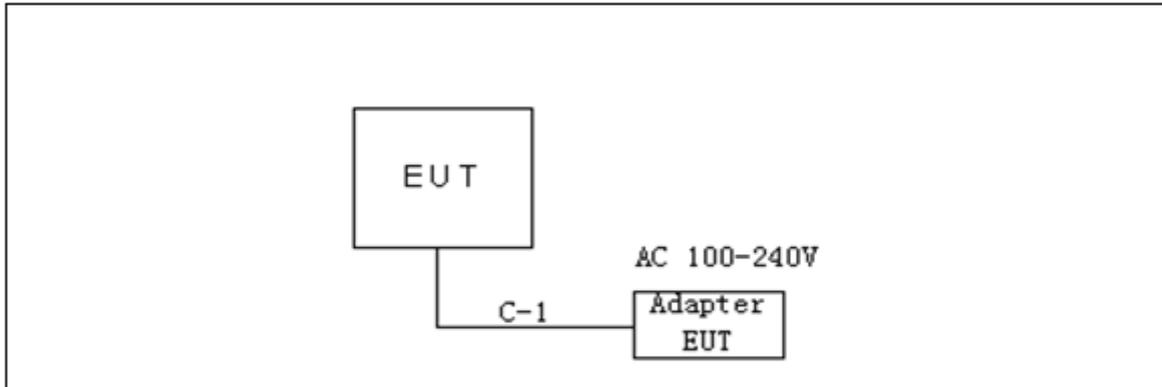

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1m	USB Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

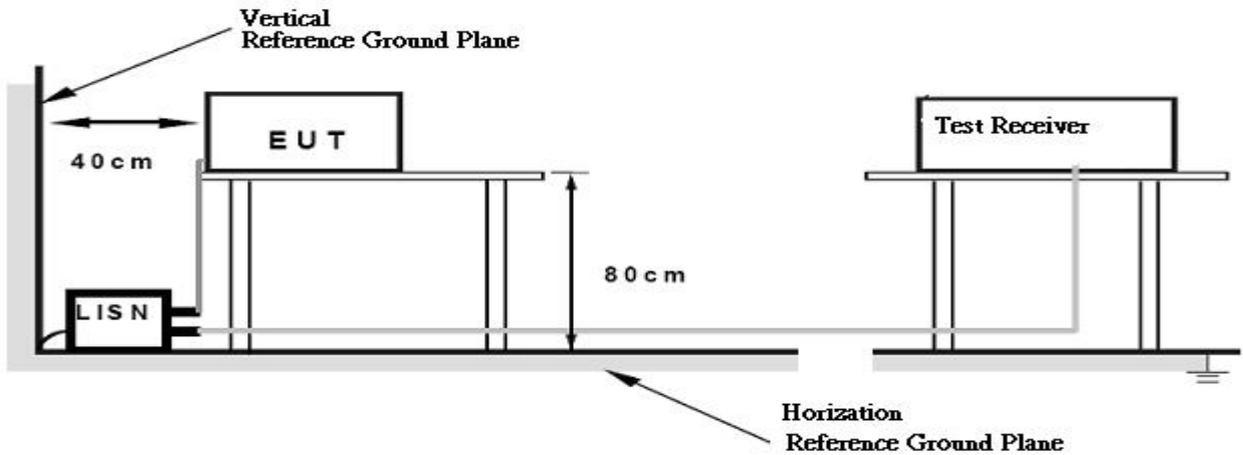

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 53% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150kHz to 30MHz.

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27(Note 2)	68.3
	10(Note 2)	105.3
	15.6(Note 2)	110.9
	27(Note 2)	122.3

Note:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength: $E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m}$, where P is the eirp (Watts)

2. According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

4.1.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD


No deviation

4.1.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency 30 - 1000MHz

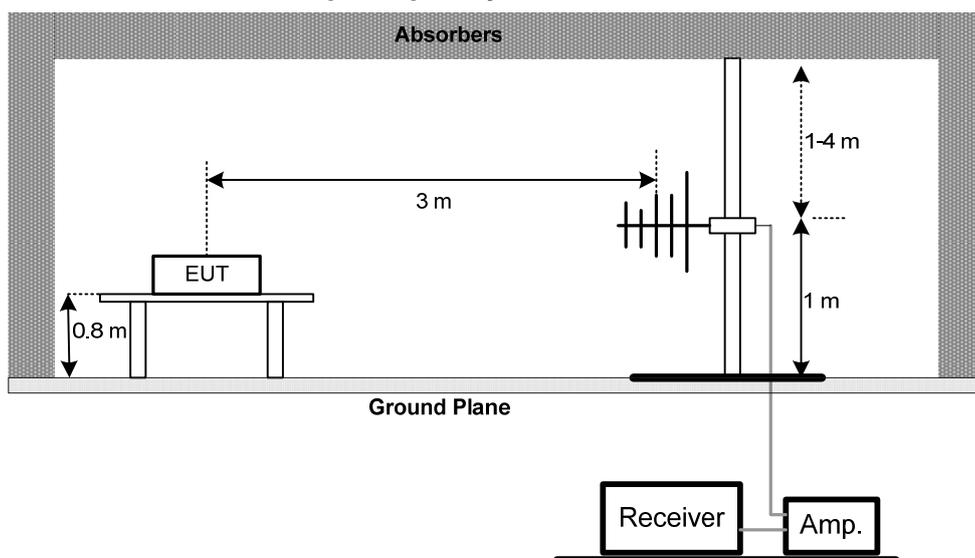

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

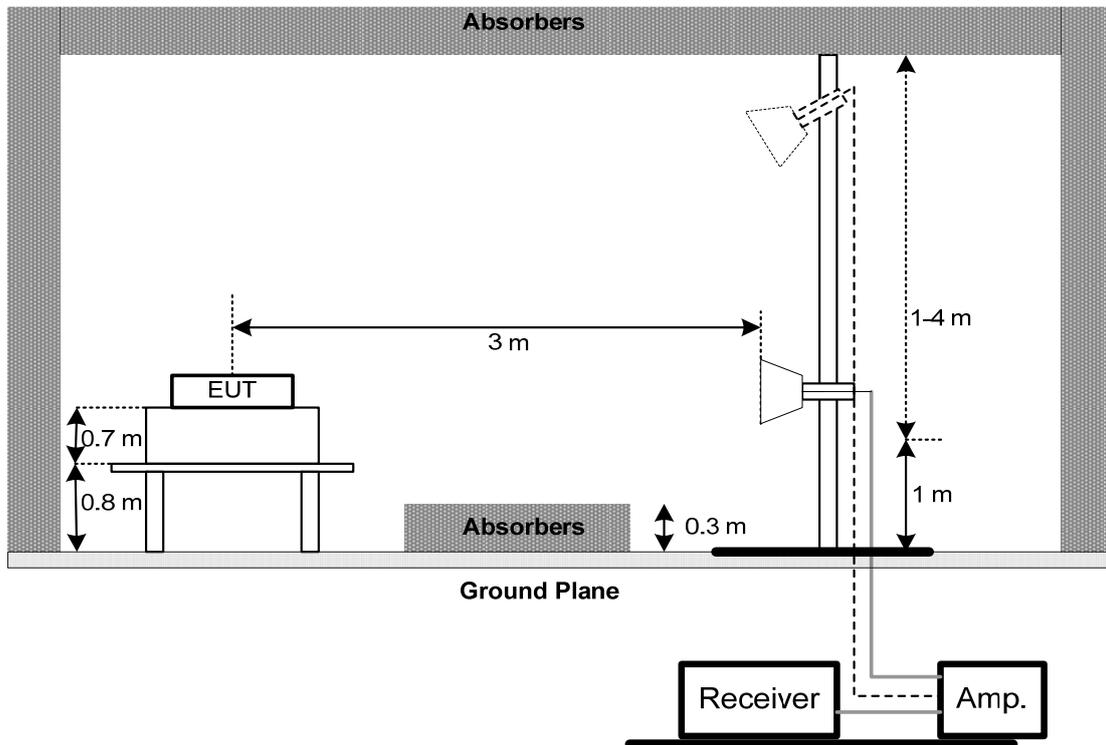

(C) Radiated emissions below 30MHz

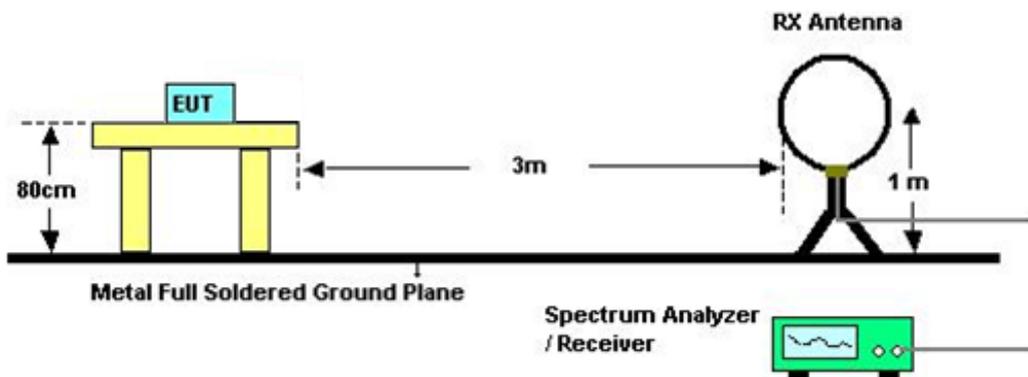

4.1.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.1.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)

Please refer to the Attachment C.

4.1.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Attachment D.

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (2) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (4) EUT Orthogonal Axes:
“X” - denotes Laid on Table; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (5) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (6) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30 MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 27, 2017
5	Antenna	ETS	3115	00075789	Mar. 27, 2017
6	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
7	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
8	Test Cable	emci	EMC104-SM-S M-10000(1GHz-26.5GHz)	C-68	Jun. 27, 2017
9	Controller	CT	SC100	N/A	N/A
10	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Mar. 27, 2017
11	Microwave Pre-amplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 27, 2017
12	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 07, 2016
13	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX Mode- Adapter: Salcomp


Line

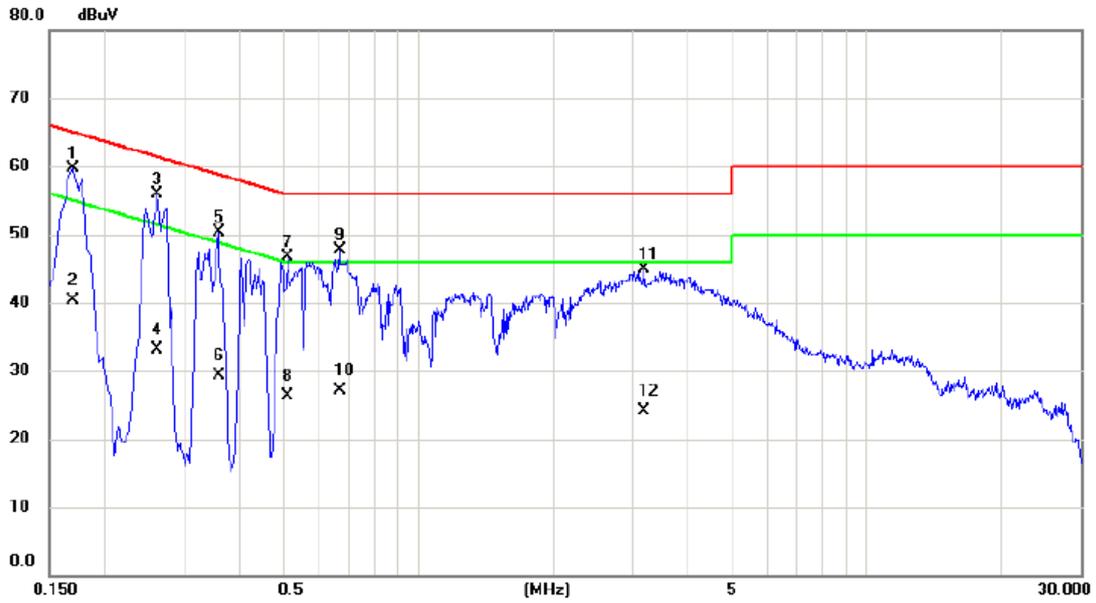

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1700	50.16	9.52	59.68	64.96	-5.28	peak	
2		0.1700	30.80	9.52	40.32	54.96	-14.64	AVG	
3		0.2620	46.28	9.53	55.81	61.37	-5.56	peak	
4		0.2620	23.50	9.53	33.03	51.37	-18.34	AVG	
5		0.3580	40.80	9.54	50.34	58.77	-8.43	peak	
6		0.3580	19.80	9.54	29.34	48.77	-19.43	AVG	
7		0.5100	37.03	9.64	46.67	56.00	-9.33	peak	
8		0.5100	16.60	9.64	26.24	46.00	-19.76	AVG	
9		0.6660	38.12	9.65	47.77	56.00	-8.23	peak	
10		0.6660	17.40	9.65	27.05	46.00	-18.95	AVG	
11		3.1940	34.78	10.11	44.89	56.00	-11.11	peak	
12		3.1940	13.90	10.11	24.01	46.00	-21.99	AVG	

Test Mode: TX Mode- Adapter: Salcomp


Neutral

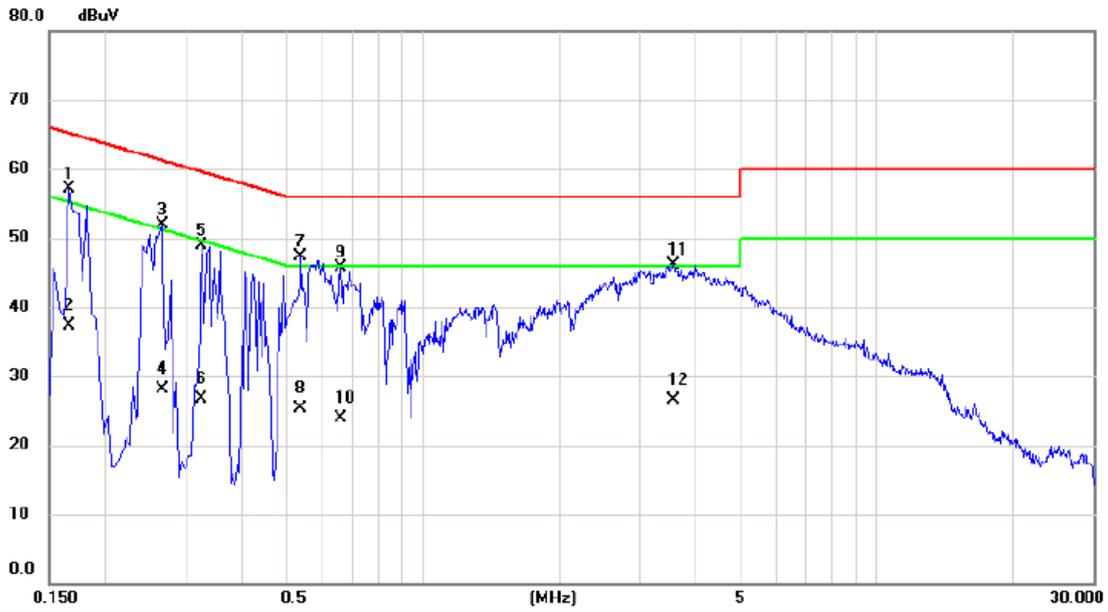

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1660	47.62	9.44	57.06	65.16	-8.10	peak	
2		0.1660	27.80	9.44	37.24	55.16	-17.92	AVG	
3		0.2660	42.39	9.53	51.92	61.24	-9.32	peak	
4		0.2660	18.60	9.53	28.13	51.24	-23.11	AVG	
5		0.3260	39.36	9.53	48.89	59.55	-10.66	peak	
6		0.3260	17.10	9.53	26.63	49.55	-22.92	AVG	
7		0.5380	37.92	9.44	47.36	56.00	-8.64	peak	
8		0.5380	15.80	9.44	25.24	46.00	-20.76	AVG	
9		0.6580	36.30	9.45	45.75	56.00	-10.25	peak	
10		0.6580	14.50	9.45	23.95	46.00	-22.05	AVG	
11		3.5620	36.17	9.85	46.02	56.00	-9.98	peak	
12		3.5620	16.60	9.85	26.45	46.00	-19.55	AVG	

Test Mode: TX Mode- Adapter: PHITEK


Line

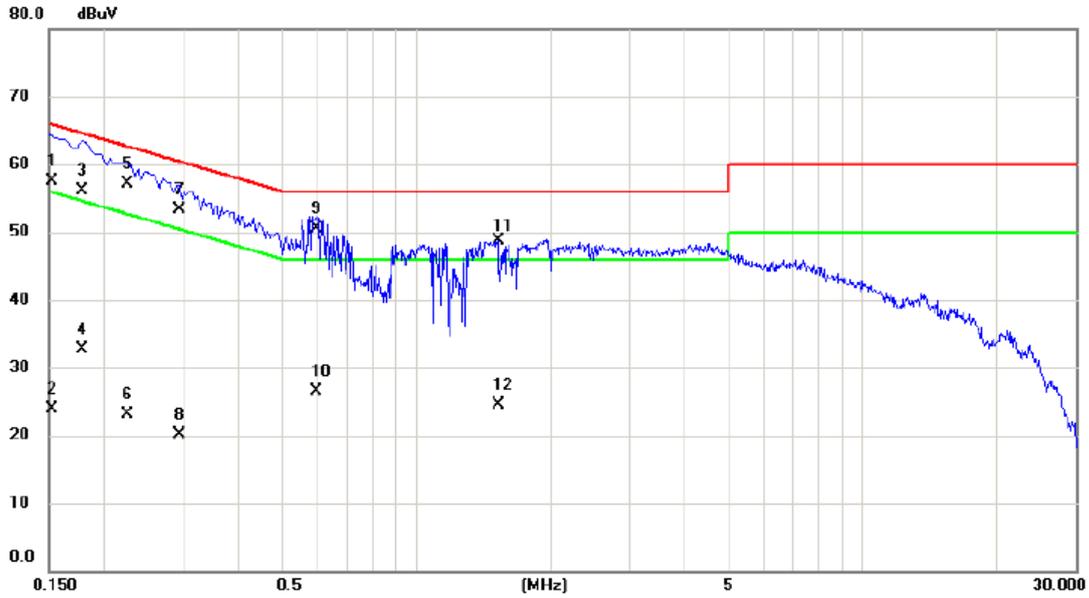

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1532	48.00	9.52	57.52	65.82	-8.30	QP	
2		0.1532	14.40	9.52	23.92	55.82	-31.90	AVG	
3		0.1780	46.50	9.53	56.03	64.58	-8.55	QP	
4		0.1780	23.10	9.53	32.63	54.58	-21.95	AVG	
5	*	0.2244	47.60	9.53	57.13	62.65	-5.52	QP	
6		0.2244	13.50	9.53	23.03	52.65	-29.62	AVG	
7		0.2940	43.80	9.53	53.33	60.41	-7.08	QP	
8		0.2940	10.50	9.53	20.03	50.41	-30.38	AVG	
9		0.5980	40.78	9.64	50.42	56.00	-5.58	QP	
10		0.5980	16.90	9.64	26.54	46.00	-19.46	AVG	
11		1.5220	38.91	9.88	48.79	56.00	-7.21	peak	
12		1.5220	14.70	9.88	24.58	46.00	-21.42	AVG	

Test Mode: TX Mode- Adapter: PHITEK


Neutral

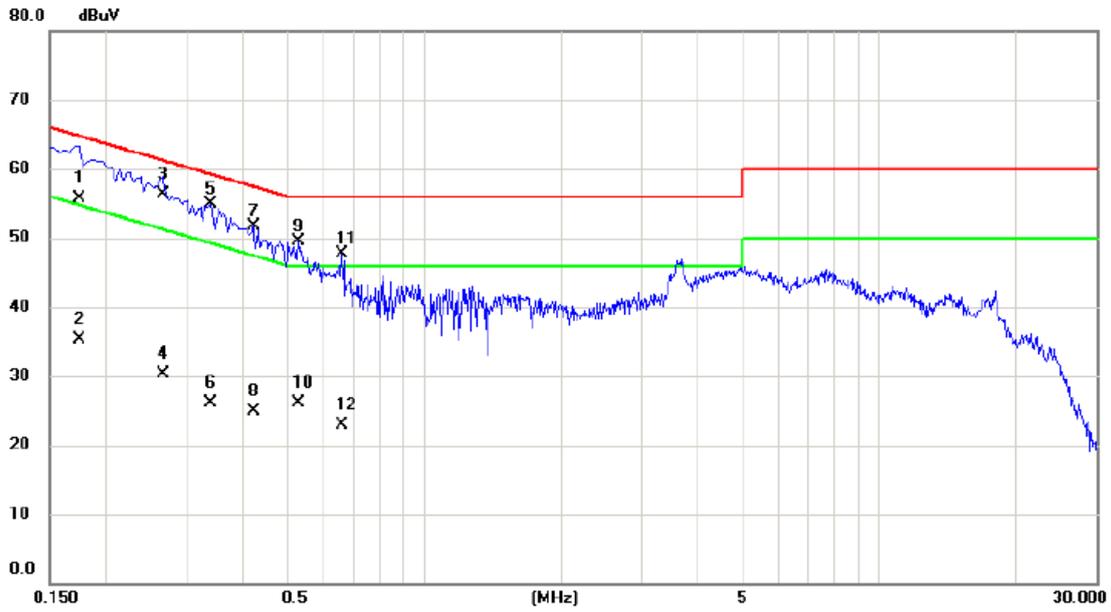

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1740	46.30	9.43	55.73	64.77	-9.04	QP	
2	0.1740	25.90	9.43	35.33	54.77	-19.44	AVG	
3	0.2660	46.70	9.53	56.23	61.24	-5.01	QP	
4	0.2660	20.80	9.53	30.33	51.24	-20.91	AVG	
5 *	0.3380	45.31	9.53	54.84	59.25	-4.41	peak	
6	0.3380	16.60	9.53	26.13	49.25	-23.12	AVG	
7	0.4220	42.31	9.44	51.75	57.41	-5.66	peak	
8	0.4220	15.40	9.44	24.84	47.41	-22.57	AVG	
9	0.5300	40.03	9.44	49.47	56.00	-6.53	peak	
10	0.5300	16.60	9.44	26.04	46.00	-19.96	AVG	
11	0.6580	38.30	9.45	47.75	56.00	-8.25	peak	
12	0.6580	13.50	9.45	22.95	46.00	-23.05	AVG	

Test Mode: TX Mode- Adapter: Huntkey


Line

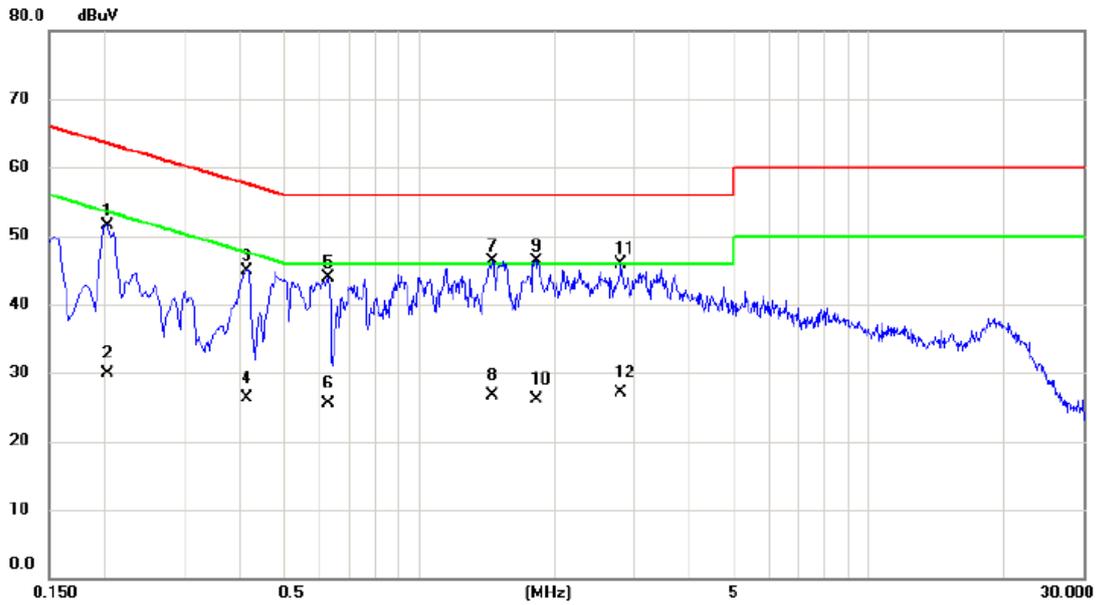

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2020	41.95	9.53	51.48	63.53	-12.05	peak	
2		0.2020	20.40	9.53	29.93	53.53	-23.60	AVG	
3		0.4140	35.35	9.55	44.90	57.57	-12.67	peak	
4		0.4140	16.80	9.55	26.35	47.57	-21.22	AVG	
5		0.6260	34.20	9.64	43.84	56.00	-12.16	peak	
6		0.6260	15.94	9.64	25.58	46.00	-20.42	AVG	
7	*	1.4580	36.47	9.86	46.33	56.00	-9.67	peak	
8		1.4580	16.90	9.86	26.76	46.00	-19.24	AVG	
9		1.8180	36.41	9.88	46.29	56.00	-9.71	peak	
10		1.8180	16.30	9.88	26.18	46.00	-19.82	AVG	
11		2.8100	35.84	10.09	45.93	56.00	-10.07	peak	
12		2.8100	17.00	10.09	27.09	46.00	-18.91	AVG	

Test Mode: TX Mode- Adapter: Huntkey

Neutral

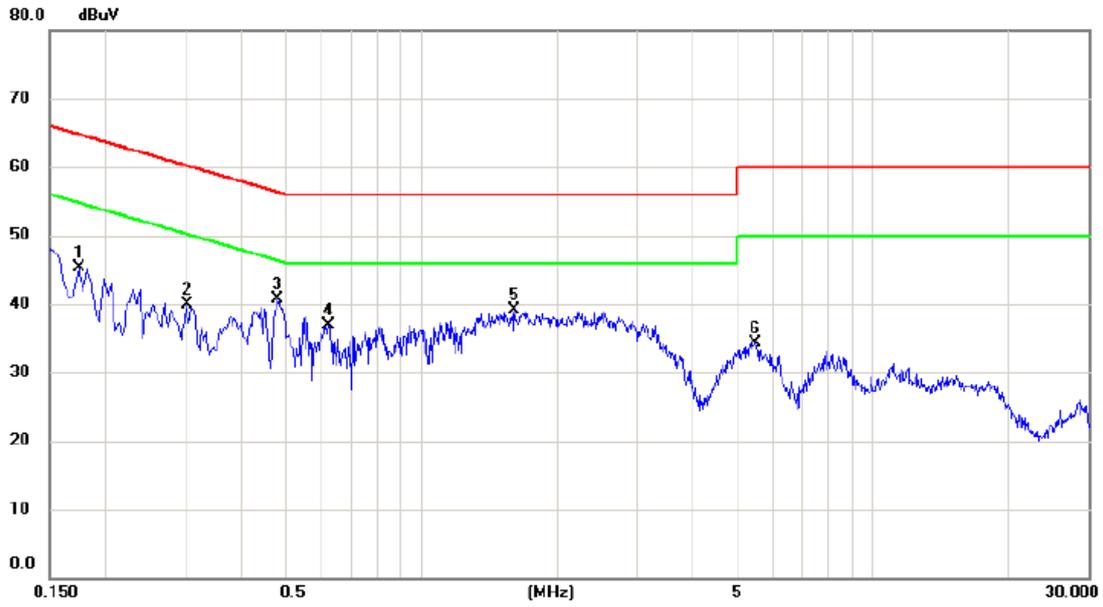

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1740	35.79	9.43	45.22	64.77	-19.55	peak	
2		0.3020	30.30	9.53	39.83	60.19	-20.36	peak	
3	*	0.4780	31.27	9.44	40.71	56.37	-15.66	peak	
4		0.6220	27.50	9.44	36.94	56.00	-19.06	peak	
5		1.6020	29.35	9.68	39.03	56.00	-16.97	peak	
6		5.4940	24.41	9.98	34.39	60.00	-25.61	peak	

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode:	TX A Mode 5180MHz- Adapter: Salcomp
------------	-------------------------------------

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0152	0°	15.71	24.60	40.31	123.97	-83.65	AVG
0.0152	0°	14.69	24.60	39.29	143.97	-104.67	PEAK
0.0287	0°	7.68	23.75	31.43	118.45	-87.02	AVG
0.0287	0°	8.79	23.75	32.54	138.45	-105.91	PEAK
0.0412	0°	4.56	22.96	27.52	115.31	-87.79	AVG
0.0412	0°	5.87	22.96	28.83	135.31	-106.48	PEAK
0.0579	0°	2.79	22.24	25.03	112.35	-87.32	AVG
0.0579	0°	4.58	22.24	26.82	132.35	-105.53	PEAK
0.5187	0°	20.18	19.86	40.04	73.31	-33.27	QP
1.9632	0°	23.69	19.50	43.19	69.54	-26.35	QP

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0136	90°	16.58	24.30	40.88	124.93	-84.05	AVG
0.0136	90°	15.72	24.30	40.02	144.93	-104.91	PEAK
0.0262	90°	9.44	23.91	33.35	119.24	-85.89	AVG
0.0262	90°	8.74	23.91	32.65	139.24	-106.59	PEAK
0.0562	90°	5.48	22.28	27.76	112.61	-84.85	AVG
0.0562	90°	6.52	22.28	28.80	132.61	-103.81	PEAK
0.0648	90°	2.69	22.10	24.79	111.37	-86.58	AVG
0.0648	90°	4.73	22.10	26.83	131.37	-104.54	PEAK
0.7154	90°	22.68	20.49	43.17	70.51	-27.34	QP
2.0759	90°	24.59	19.45	44.04	69.54	-25.50	QP

Test Mode:	TX A Mode 5180MHz- Adapter: PHITEK
------------	------------------------------------

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0174	0°	16.74	24.46	41.20	122.79	-81.59	AVG
0.0174	0°	15.65	24.46	40.11	142.79	-102.68	PEAK
0.0345	0°	7.85	23.38	31.23	116.85	-85.62	AVG
0.0345	0°	8.94	23.38	32.32	136.85	-104.53	PEAK
0.0462	0°	4.73	22.64	27.37	114.31	-86.94	AVG
0.0462	0°	6.85	22.64	29.49	134.31	-104.82	PEAK
0.0587	0°	2.76	22.23	24.99	112.23	-87.25	AVG
0.0587	0°	5.84	22.23	28.07	132.23	-104.17	PEAK
0.5476	0°	19.75	19.95	39.70	72.83	-33.13	QP
1.9749	0°	24.71	19.50	44.21	69.54	-25.33	QP

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0138	90°	16.48	24.30	40.78	124.81	-84.03	AVG
0.0138	90°	15.70	24.30	40.00	144.81	-104.81	PEAK
0.0349	90°	9.52	23.36	32.88	116.75	-83.87	AVG
0.0349	90°	10.69	23.36	34.05	136.75	-102.70	PEAK
0.0485	90°	5.85	22.50	28.35	113.89	-85.54	AVG
0.0485	90°	6.75	22.50	29.25	133.89	-104.64	PEAK
0.0677	90°	3.49	22.05	25.54	110.99	-85.46	AVG
0.0677	90°	2.98	22.05	25.03	130.99	-105.97	PEAK
0.6211	90°	23.58	20.19	43.77	71.74	-27.97	QP
2.0419	90°	25.51	19.47	44.98	69.54	-24.56	QP

Test Mode:	TX A Mode 5180MHz- Adapter: Huntkey
------------	-------------------------------------


Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0092	0°	13.57	24.98	38.55	128.33	-89.77	AVG
0.0092	0°	14.46	24.98	39.44	148.33	-108.88	PEAK
0.0278	0°	6.77	23.81	30.58	118.72	-88.15	AVG
0.0278	0°	8.48	23.81	32.29	138.72	-106.44	PEAK
0.0358	0°	3.40	23.30	26.70	116.53	-89.83	AVG
0.0358	0°	5.61	23.30	28.91	136.53	-107.62	PEAK
0.0579	0°	1.36	22.24	23.60	112.35	-88.75	AVG
0.0579	0°	2.67	22.24	24.91	132.35	-107.44	PEAK
0.5088	0°	19.14	19.83	38.97	73.47	-34.51	QP
1.9518	0°	23.50	19.50	43.00	69.54	-26.54	QP

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0127	90°	13.48	24.30	37.78	125.53	-87.75	AVG
0.0127	90°	14.80	24.30	39.10	145.53	-106.43	PEAK
0.0254	90°	7.36	23.96	31.32	119.51	-88.19	AVG
0.0254	90°	8.91	23.96	32.87	139.51	-106.64	PEAK
0.0443	90°	5.47	22.76	28.23	114.68	-86.45	AVG
0.0443	90°	6.26	22.76	29.02	134.68	-105.66	PEAK
0.0581	90°	1.68	22.24	23.92	112.32	-88.40	AVG
0.0581	90°	2.55	22.24	24.79	132.32	-107.53	PEAK
0.6225	90°	22.32	20.19	42.51	71.72	-29.21	QP
2.0547	90°	24.46	19.47	43.93	69.54	-25.61	QP

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: UNII-1/TX A Mode 5180MHz- Adapter: Salcomp


Vertical

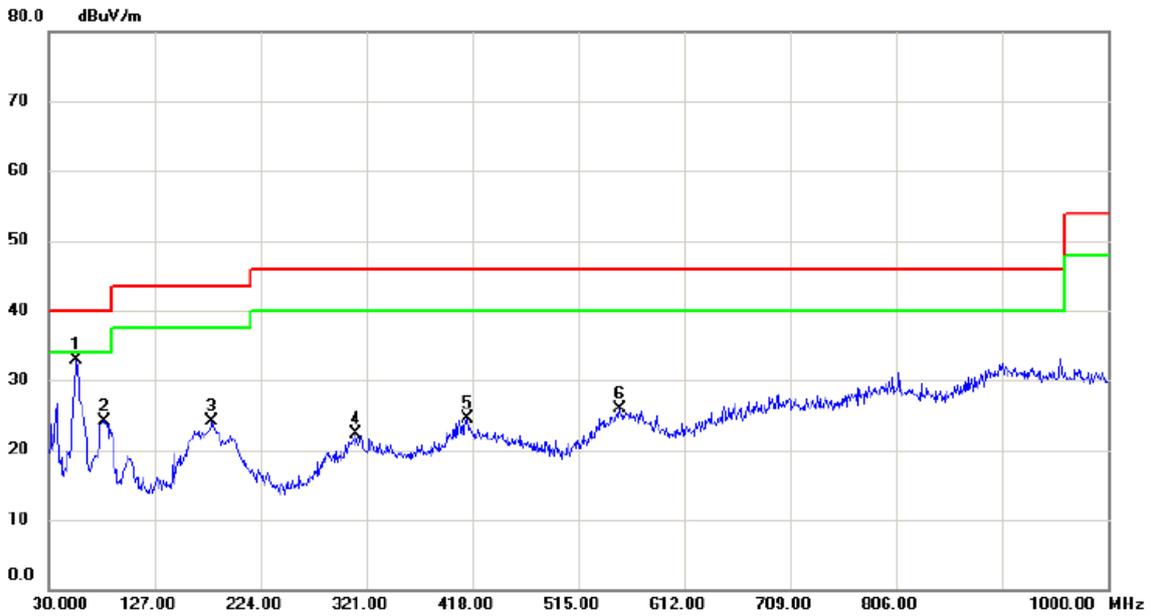

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	55.2200	46.36	-13.38	32.98	40.00	-7.02	peak	
2		80.9250	40.49	-16.29	24.20	40.00	-15.80	peak	
3		179.8650	36.93	-12.83	24.10	43.50	-19.40	peak	
4		311.7850	32.64	-10.42	22.22	46.00	-23.78	peak	
5		413.6350	32.37	-7.84	24.53	46.00	-21.47	peak	
6		552.8300	30.55	-4.68	25.87	46.00	-20.13	peak	

Test Mode: UNII-1/TX A Mode 5180MHz- Adapter: Salcomp


Horizontal

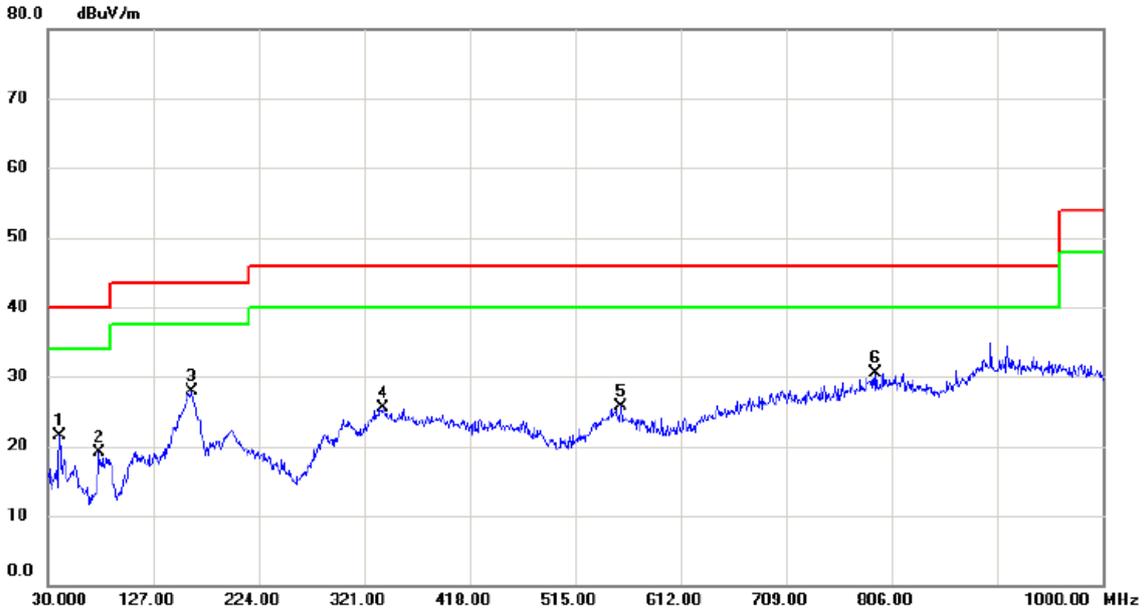

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.1550	35.26	-13.67	21.59	40.00	-18.41	peak	
2		77.5300	35.35	-16.31	19.04	40.00	-20.96	peak	
3		162.8900	40.16	-12.18	27.98	43.50	-15.52	peak	
4		337.9750	36.39	-10.96	25.43	46.00	-20.57	peak	
5		557.1950	30.61	-4.90	25.71	46.00	-20.29	peak	
6	*	791.4500	30.67	-0.11	30.56	46.00	-15.44	peak	

Test Mode: UNII-1/TX A Mode 5240MHz- Adapter: Salcomp


Vertical

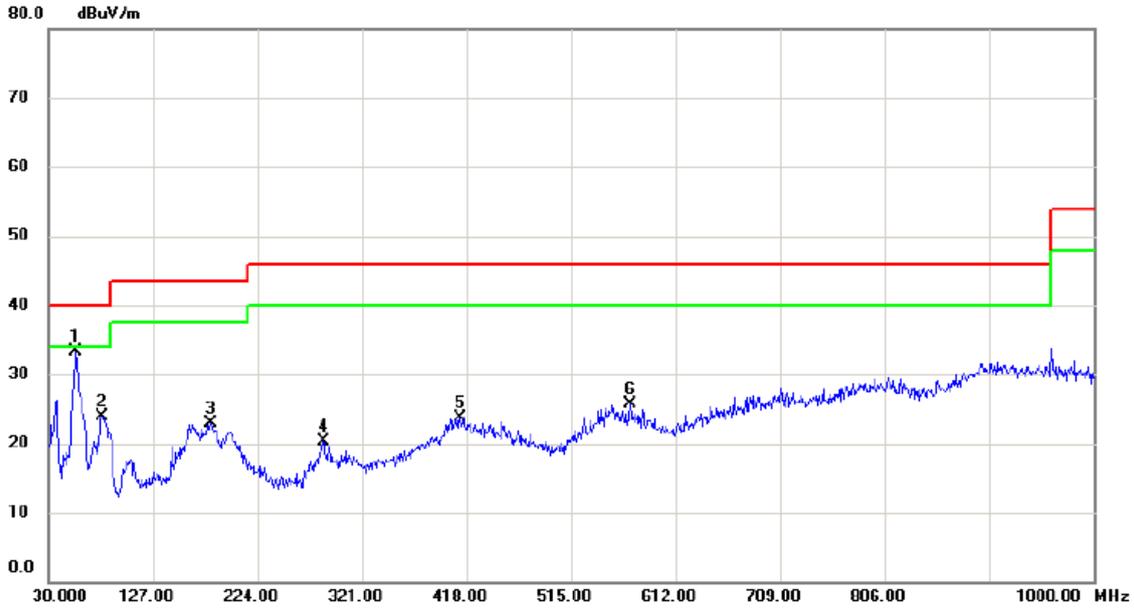

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	55.2200	46.61	-13.38	33.23	40.00	-6.77	peak	
2		79.9550	39.98	-16.04	23.94	40.00	-16.06	peak	
3		180.8350	35.76	-12.93	22.83	43.50	-20.67	peak	
4		285.5950	31.90	-11.60	20.30	46.00	-25.70	peak	
5		412.6650	31.57	-7.84	23.73	46.00	-22.27	peak	
6		569.3200	31.13	-5.51	25.62	46.00	-20.38	peak	

Test Mode: UNII-1/TX A Mode 5240MHz- Adapter: Salcomp


Horizontal

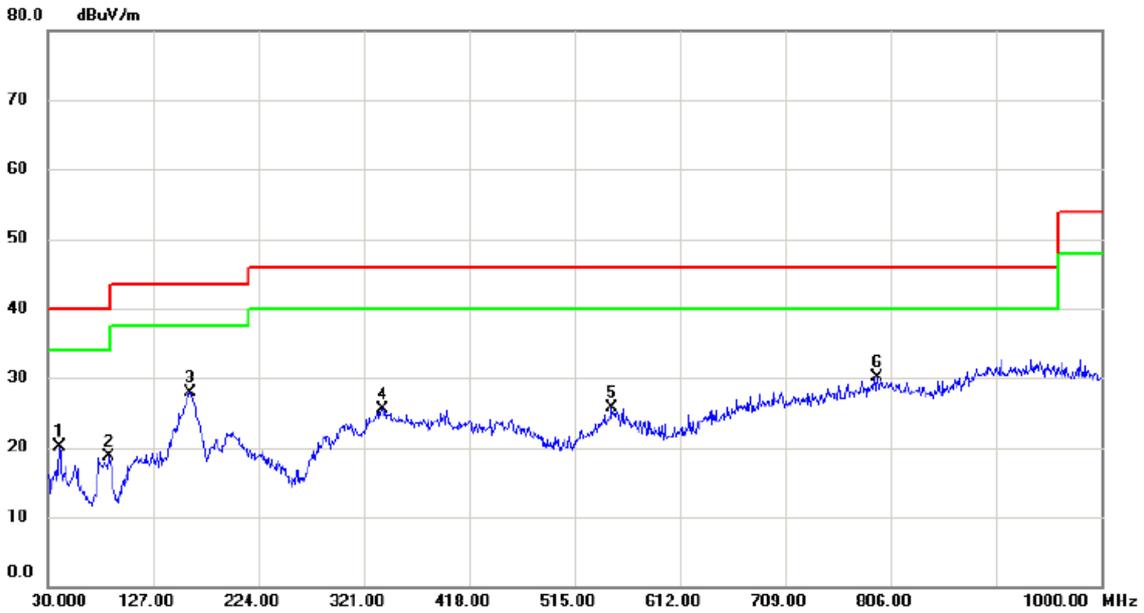

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	33.81	-13.77	20.04	40.00	-19.96	peak	
2		86.7450	36.06	-17.41	18.65	40.00	-21.35	peak	
3	*	161.4350	40.11	-12.16	27.95	43.50	-15.55	peak	
4		338.9450	36.48	-10.98	25.50	46.00	-20.50	peak	
5		549.9200	30.32	-4.55	25.77	46.00	-20.23	peak	
6		793.8750	30.07	-0.01	30.06	46.00	-15.94	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz- Adapter: Salcomp

Vertical

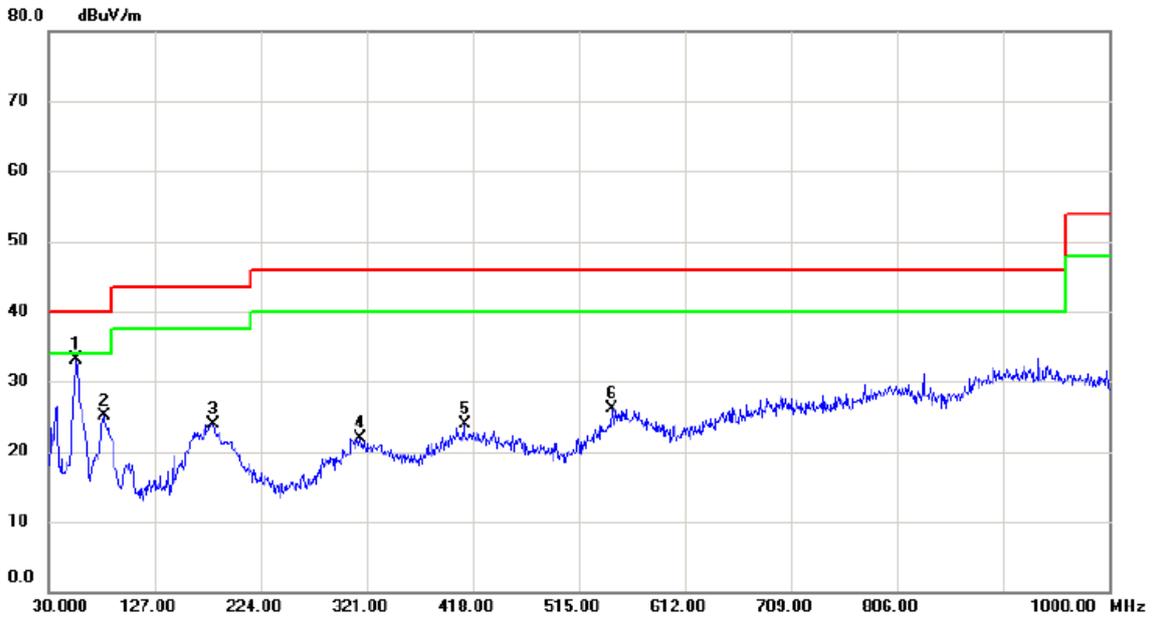

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	55.2200	46.56	-13.38	33.18	40.00	-6.82	peak	
2		80.9250	41.47	-16.29	25.18	40.00	-14.82	peak	
3		180.8350	36.86	-12.93	23.93	43.50	-19.57	peak	
4		315.6650	32.43	-10.49	21.94	46.00	-24.06	peak	
5		410.2400	31.82	-7.82	24.00	46.00	-22.00	peak	
6		545.0700	31.21	-5.04	26.17	46.00	-19.83	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz- Adapter: Salcomp


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	33.47	-13.77	19.70	40.00	-20.30	peak	
2		80.4400	35.00	-16.16	18.84	40.00	-21.16	peak	
3	*	161.9200	39.93	-12.16	27.77	43.50	-15.73	peak	
4		338.4600	36.63	-10.98	25.65	46.00	-20.35	peak	
5		556.7100	30.89	-4.88	26.01	46.00	-19.99	peak	
6		710.4550	30.59	-2.08	28.51	46.00	-17.49	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz- Adapter: Salcomp

Vertical

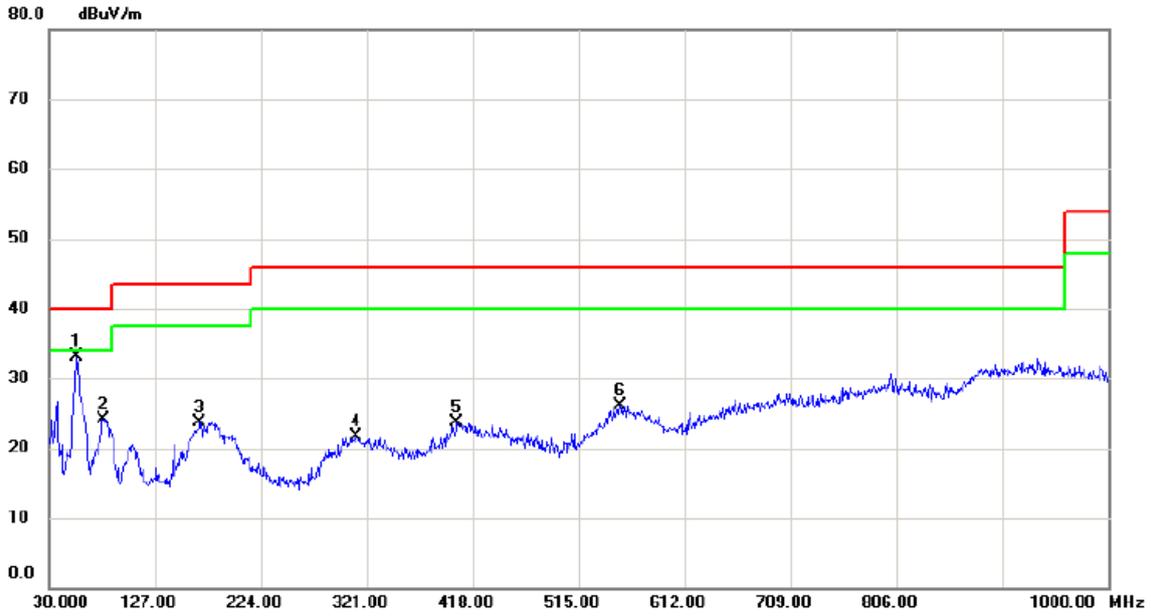

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	55.2200	46.55	-13.38	33.17	40.00	-6.83	peak	
2		79.9550	40.17	-16.04	24.13	40.00	-15.87	peak	
3		168.2250	35.96	-12.22	23.74	43.50	-19.76	peak	
4		310.8150	32.12	-10.39	21.73	46.00	-24.27	peak	
5		403.4500	31.58	-7.79	23.79	46.00	-22.21	peak	
6		553.3150	30.87	-4.71	26.16	46.00	-19.84	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz- Adapter: Salcomp


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.6400	33.04	-13.56	19.48	40.00	-20.52	peak	
2		82.8650	34.48	-16.82	17.66	40.00	-22.34	peak	
3	*	162.4050	40.55	-12.17	28.38	43.50	-15.12	peak	
4		329.2450	37.14	-10.78	26.36	46.00	-19.64	peak	
5		547.4950	30.50	-4.80	25.70	46.00	-20.30	peak	
6		714.3350	30.33	-2.07	28.26	46.00	-17.74	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz- Adapter: Salcomp

Vertical

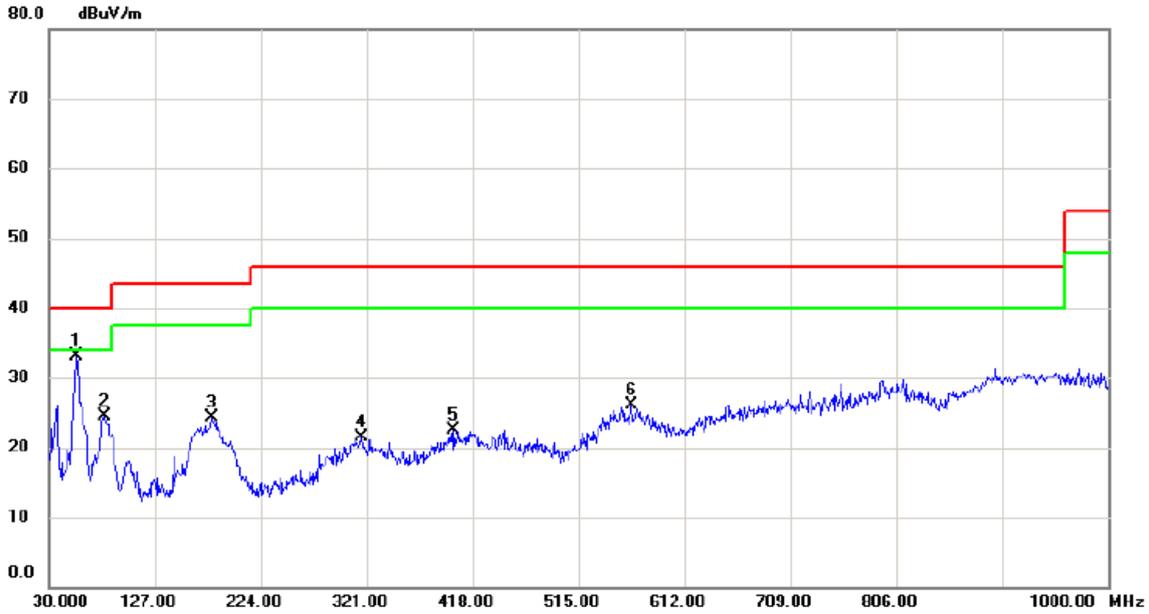

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	55.2200	46.50	-13.38	33.12	40.00	-6.88	peak	
2		80.9250	40.76	-16.29	24.47	40.00	-15.53	peak	
3		179.8650	37.16	-12.83	24.33	43.50	-19.17	peak	
4		316.1500	31.95	-10.50	21.45	46.00	-24.55	peak	
5		401.0250	30.31	-7.78	22.53	46.00	-23.47	peak	
6		563.9850	31.40	-5.25	26.15	46.00	-19.85	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz- Adapter: Salcomp


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.6400	33.05	-13.56	19.49	40.00	-20.51	peak	
2		84.8050	36.04	-17.35	18.69	40.00	-21.31	peak	
3	*	160.9500	40.22	-12.16	28.06	43.50	-15.44	peak	
4		337.4900	36.52	-10.95	25.57	46.00	-20.43	peak	
5		557.6800	30.79	-4.92	25.87	46.00	-20.13	peak	
6		708.5150	30.45	-2.08	28.37	46.00	-17.63	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz- Adapter: Salcomp


Vertical

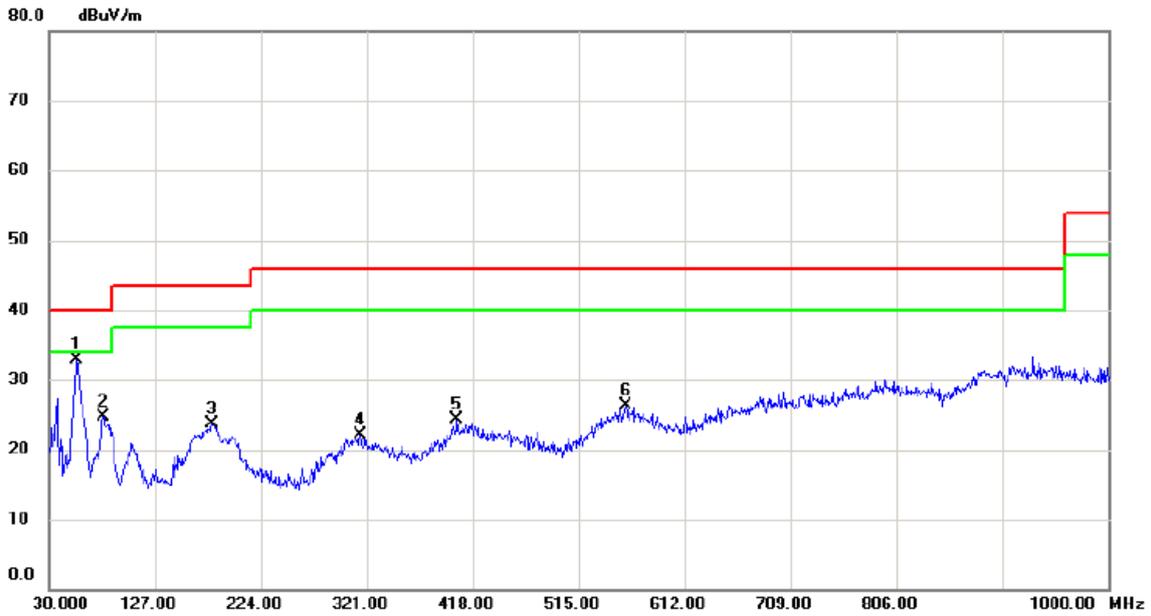

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	55.2200	46.21	-13.38	32.83	40.00	-7.17	peak	
2		79.9550	40.73	-16.04	24.69	40.00	-15.31	peak	
3		179.8650	36.57	-12.83	23.74	43.50	-19.76	peak	
4		315.1800	32.55	-10.47	22.08	46.00	-23.92	peak	
5		403.4500	32.07	-7.79	24.28	46.00	-21.72	peak	
6		558.1650	31.18	-4.95	26.23	46.00	-19.77	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz- Adapter: Salcomp


Horizontal

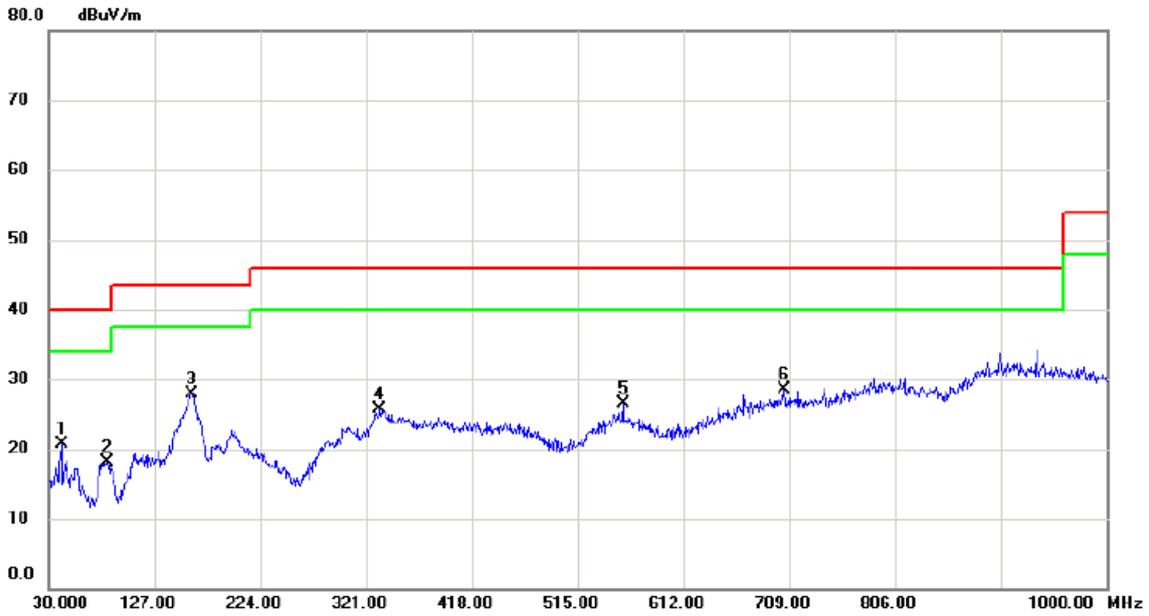

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		42.1250	34.09	-13.46	20.63	40.00	-19.37	peak	
2		83.8350	35.21	-17.08	18.13	40.00	-21.87	peak	
3	*	160.9500	40.06	-12.16	27.90	43.50	-15.60	peak	
4		333.6100	36.51	-10.87	25.64	46.00	-20.36	peak	
5		556.7100	31.31	-4.88	26.43	46.00	-19.57	peak	
6		704.1500	30.62	-2.09	28.53	46.00	-17.47	peak	

Test Mode: UNII-3/TX A Mode 5745MHz- Adapter: Salcomp


Vertical

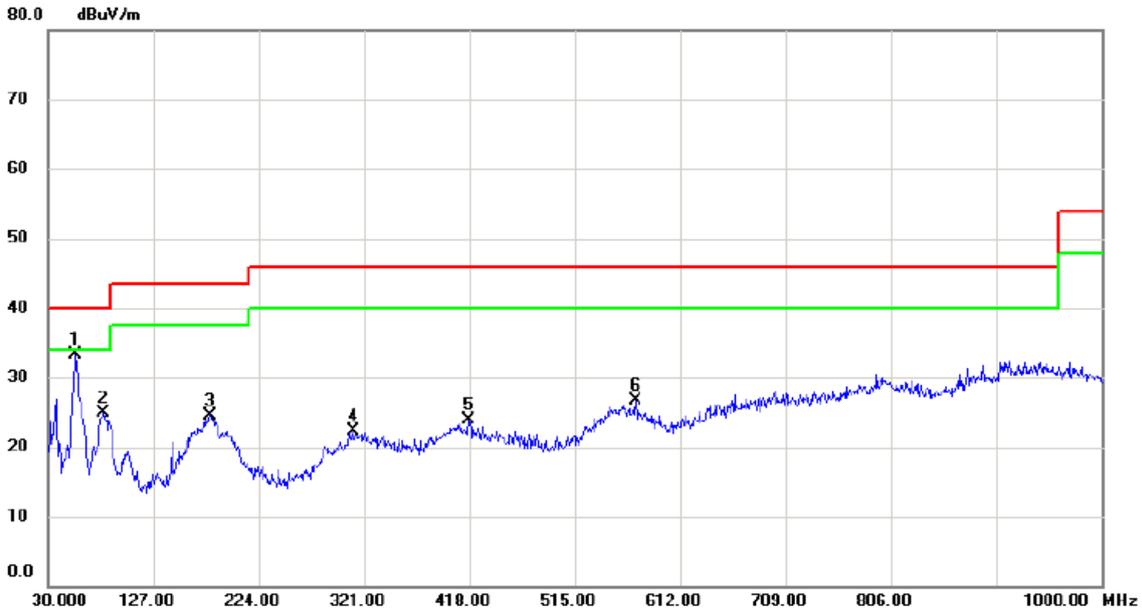

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	55.2200	46.77	-13.38	33.39	40.00	-6.61	peak	
2		81.4100	41.31	-16.42	24.89	40.00	-15.11	peak	
3		179.3800	37.40	-12.80	24.60	43.50	-18.90	peak	
4		311.3000	32.78	-10.40	22.38	46.00	-23.62	peak	
5		417.0300	31.69	-7.86	23.83	46.00	-22.17	peak	
6		571.7450	32.28	-5.63	26.65	46.00	-19.35	peak	

Test Mode: UNII-3/TX A Mode 5745MHz- Adapter: Salcomp


Horizontal

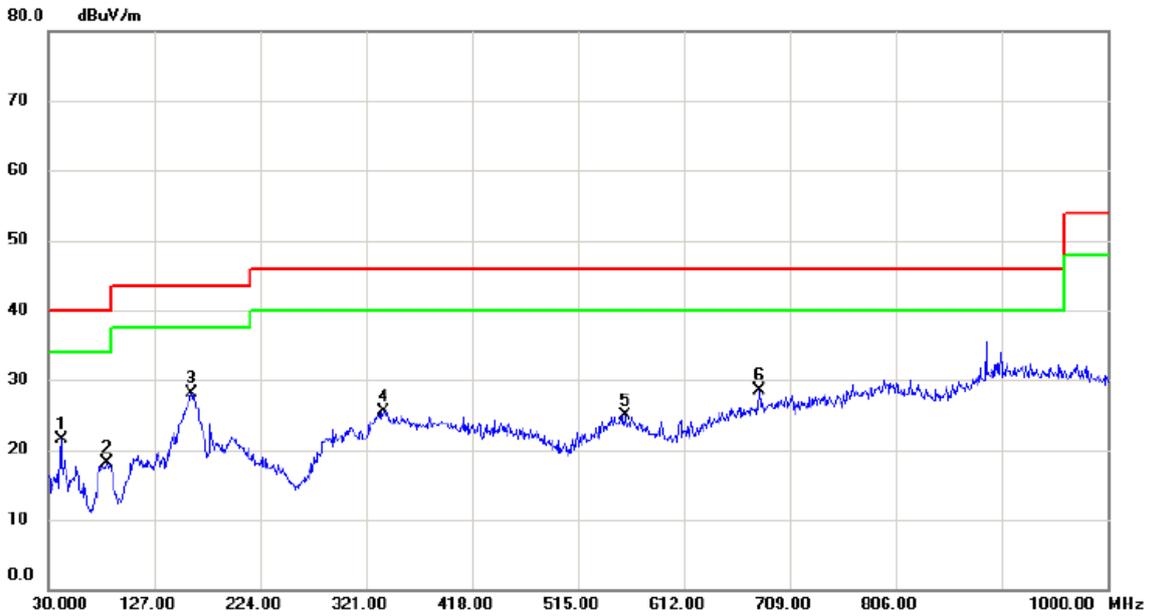

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.6400	35.10	-13.56	21.54	40.00	-18.46	peak	
2		83.8350	35.25	-17.08	18.17	40.00	-21.83	peak	
3	*	160.9500	40.27	-12.16	28.11	43.50	-15.39	peak	
4		336.5200	36.47	-10.93	25.54	46.00	-20.46	peak	
5		558.1650	29.92	-4.95	24.97	46.00	-21.03	peak	
6		680.8700	31.48	-2.89	28.59	46.00	-17.41	peak	

Test Mode: UNII-3/TX A Mode 5825MHz- Adapter: Salcomp

Vertical

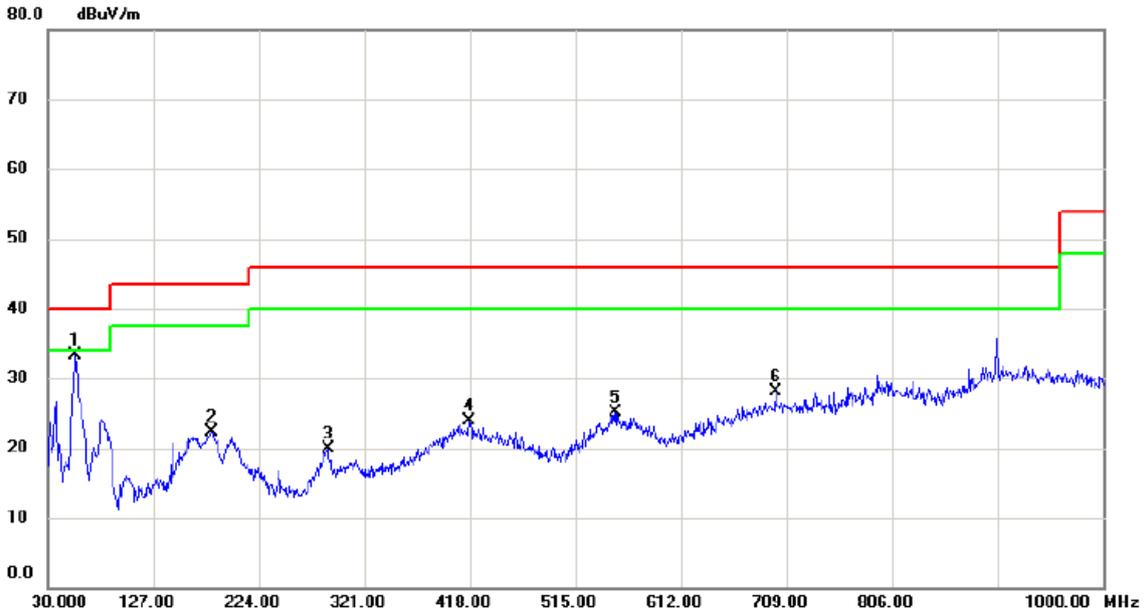

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	55.2200	46.77	-13.38	33.39	40.00	-6.61	peak	
2		180.8350	35.32	-12.93	22.39	43.50	-21.11	peak	
3		287.5350	31.30	-11.43	19.87	46.00	-26.13	peak	
4		417.0300	31.69	-7.86	23.83	46.00	-22.17	peak	
5		551.3750	29.70	-4.61	25.09	46.00	-20.91	peak	
6		698.8150	30.18	-2.15	28.03	46.00	-17.97	peak	


Test Mode: UNII-3/TX A Mode 5825MHz- Adapter: Salcomp

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	33.08	-13.77	19.31	40.00	-20.69	peak	
2		86.7450	35.64	-17.41	18.23	40.00	-21.77	peak	
3	*	159.9800	40.22	-12.15	28.07	43.50	-15.43	peak	
4		334.0950	36.21	-10.89	25.32	46.00	-20.68	peak	
5		556.2250	30.04	-4.86	25.18	46.00	-20.82	peak	
6		687.6600	30.27	-2.61	27.66	46.00	-18.34	peak	


Test Mode: UNII-1/TX A Mode 5180MHz- Adapter: PHITEK

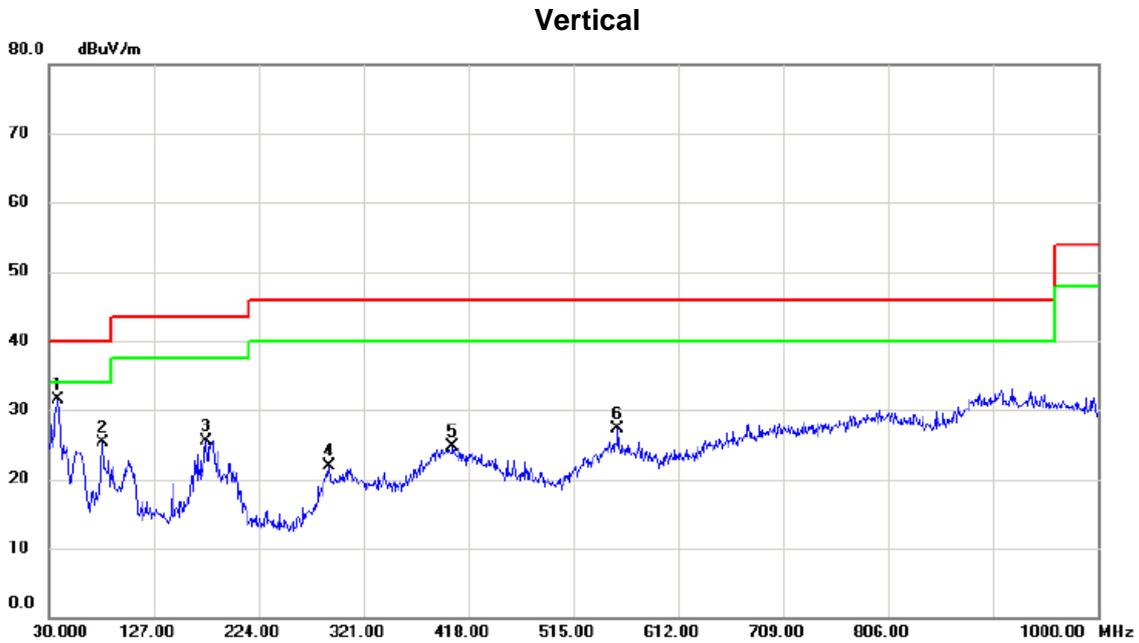

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	45.59	-14.06	31.53	40.00	-8.47	peak	
2		79.9550	41.42	-16.04	25.38	40.00	-14.62	peak	
3		175.9850	38.01	-12.60	25.41	43.50	-18.09	peak	
4		289.4750	33.11	-11.29	21.82	46.00	-24.18	peak	
5		403.4500	32.58	-7.79	24.79	46.00	-21.21	peak	
6		555.7400	32.10	-4.83	27.27	46.00	-18.73	peak	


Test Mode: UNII-1/TX A Mode 5180MHz- Adapter: PHITEK

Horizontal

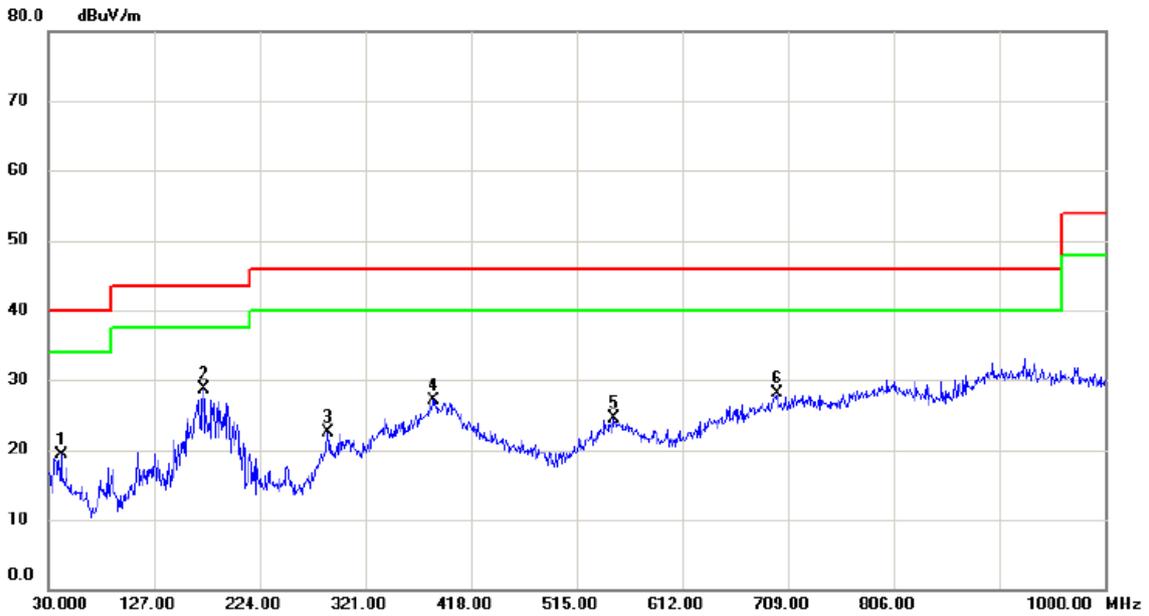

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.6400	32.80	-13.56	19.24	40.00	-20.76	peak	
2	*	172.5900	41.03	-12.40	28.63	43.50	-14.87	peak	
3		286.0800	33.97	-11.55	22.42	46.00	-23.58	peak	
4		384.0500	35.99	-8.88	27.11	46.00	-18.89	peak	
5		549.9200	28.98	-4.55	24.43	46.00	-21.57	peak	
6		698.8150	30.22	-2.15	28.07	46.00	-17.93	peak	


Test Mode: UNII-1/TX A Mode 5240MHz- Adapter: PHITEK

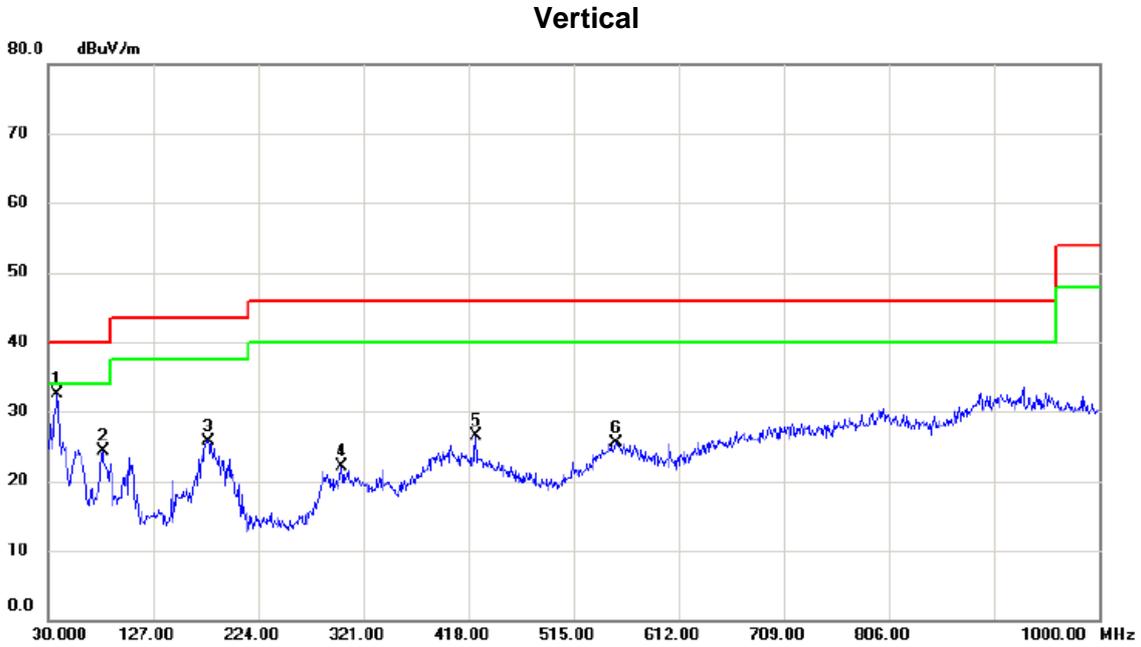

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	46.48	-14.06	32.42	40.00	-7.58	peak	
2		80.9250	40.67	-16.29	24.38	40.00	-15.62	peak	
3		177.4400	38.47	-12.68	25.79	43.50	-17.71	peak	
4		301.1150	32.32	-10.18	22.14	46.00	-23.86	peak	
5		424.7900	34.35	-7.89	26.46	46.00	-19.54	peak	
6		554.2850	30.22	-4.75	25.47	46.00	-20.53	peak	


Test Mode: UNII-1/TX A Mode 5240MHz- Adapter: PHITEK

Horizontal

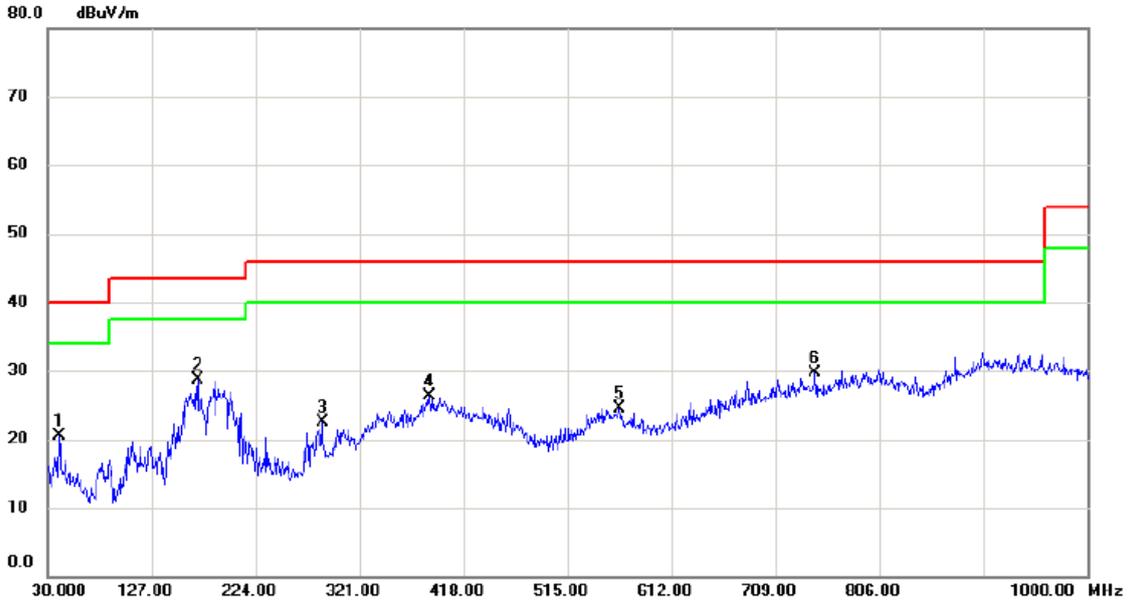

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.1550	34.14	-13.67	20.47	40.00	-19.53	peak	
2	*	170.1650	40.91	-12.25	28.66	43.50	-14.84	peak	
3		286.5650	34.07	-11.52	22.55	46.00	-23.45	peak	
4		385.9900	35.01	-8.74	26.27	46.00	-19.73	peak	
5		563.9850	29.79	-5.25	24.54	46.00	-21.46	peak	
6		745.8600	31.72	-1.98	29.74	46.00	-16.26	peak	


Test Mode: UNII-2A/TX A Mode 5260MHz- Adapter: PHITEK

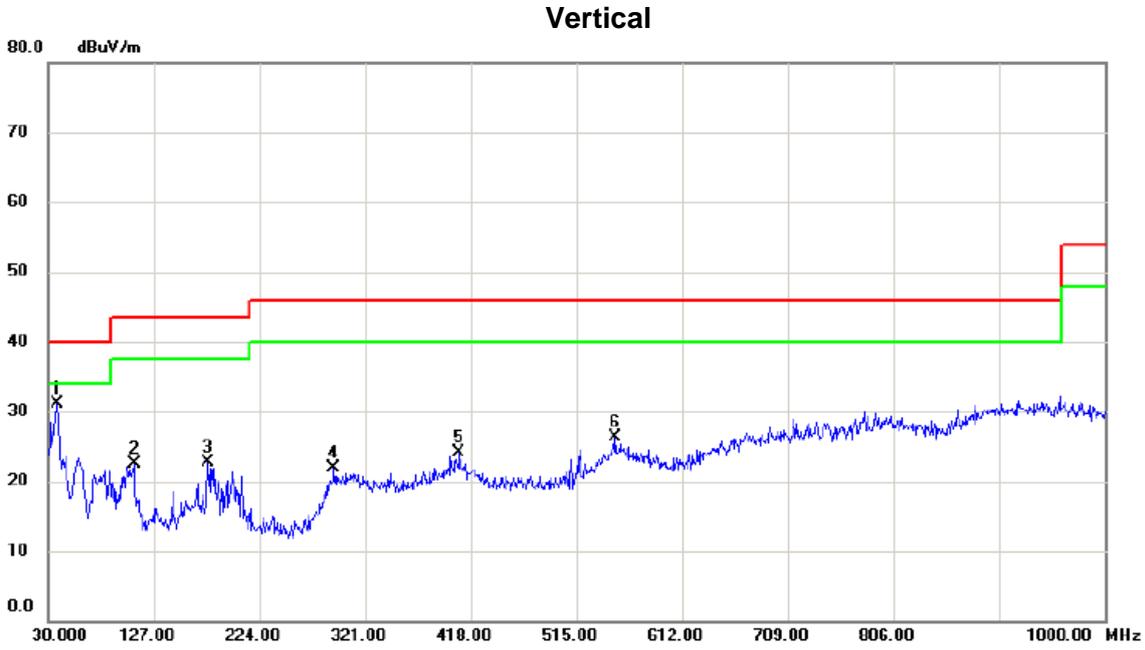

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.2450	45.17	-14.12	31.05	40.00	-8.95	peak	
2		109.0550	37.27	-14.73	22.54	43.50	-20.96	peak	
3		176.9550	35.30	-12.66	22.64	43.50	-20.86	peak	
4		291.9000	33.02	-11.04	21.98	46.00	-24.02	peak	
5		407.3300	31.87	-7.82	24.05	46.00	-21.95	peak	
6		550.8900	30.86	-4.59	26.27	46.00	-19.73	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz- Adapter: PHITEK


Horizontal

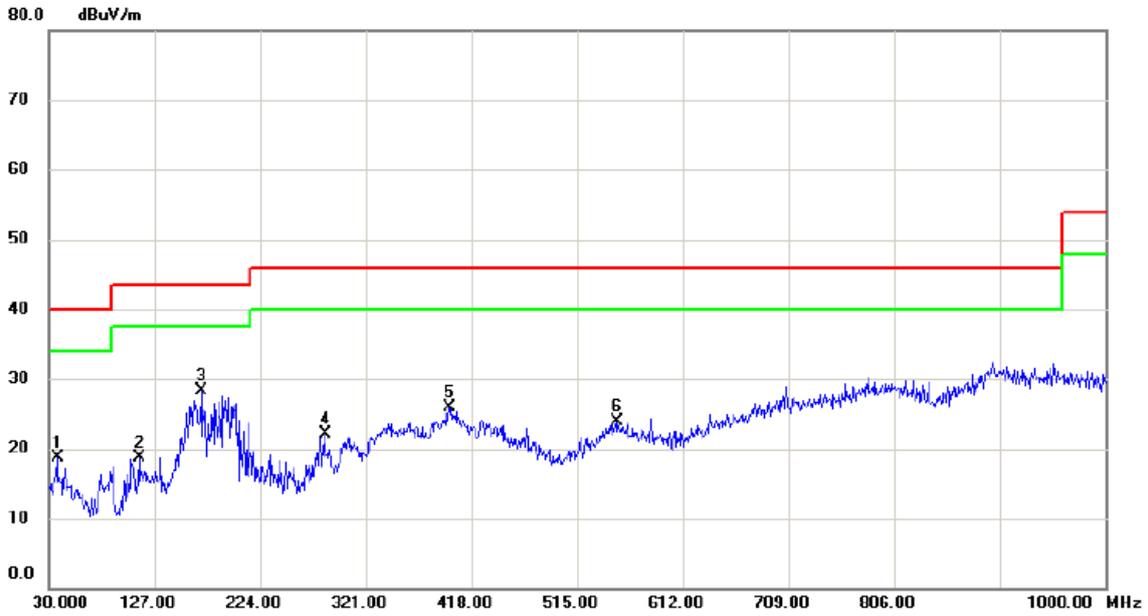

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		38.2450	32.85	-14.12	18.73	40.00	-21.27	peak	
2		112.9350	33.05	-14.31	18.74	43.50	-24.76	peak	
3	*	170.1650	40.60	-12.25	28.35	43.50	-15.15	peak	
4		283.6550	33.93	-11.74	22.19	46.00	-23.81	peak	
5		398.1150	33.74	-7.91	25.83	46.00	-20.17	peak	
6		551.3750	28.54	-4.61	23.93	46.00	-22.07	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz- Adapter: PHITEK


Vertical

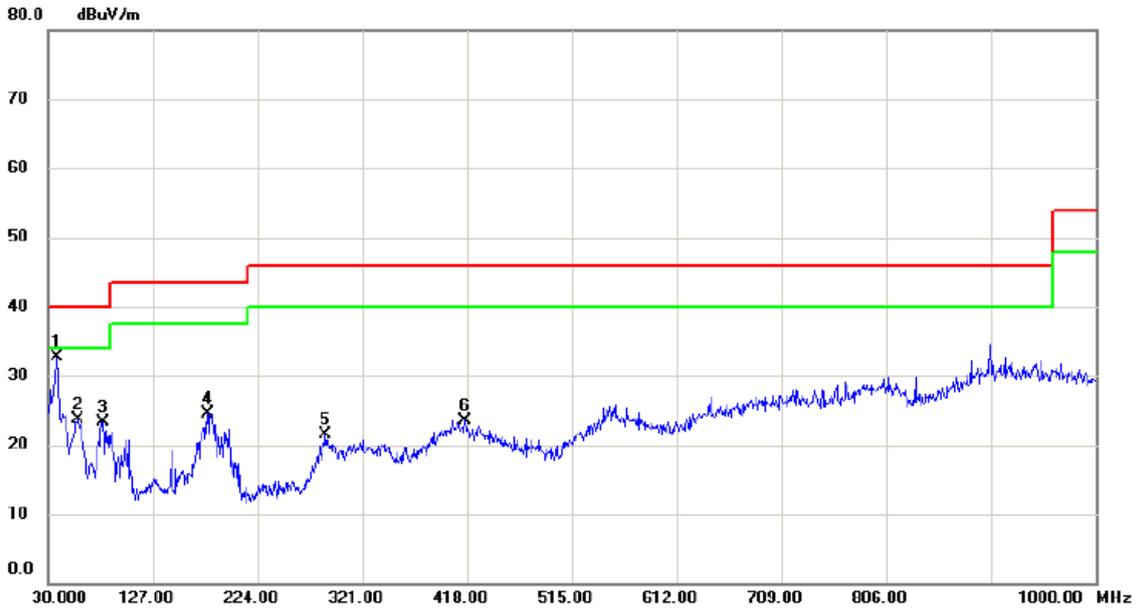

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	46.68	-14.06	32.62	40.00	-7.38	peak	
2		58.1300	37.59	-13.82	23.77	40.00	-16.23	peak	
3		80.9250	39.63	-16.29	23.34	40.00	-16.66	peak	
4		177.4400	37.28	-12.68	24.60	43.50	-18.90	peak	
5		287.0500	32.93	-11.49	21.44	46.00	-24.56	peak	
6		416.5450	31.34	-7.85	23.49	46.00	-22.51	peak	


Test Mode: UNII-2A/TX A Mode 5320MHz- Adapter: PHITEK

Horizontal

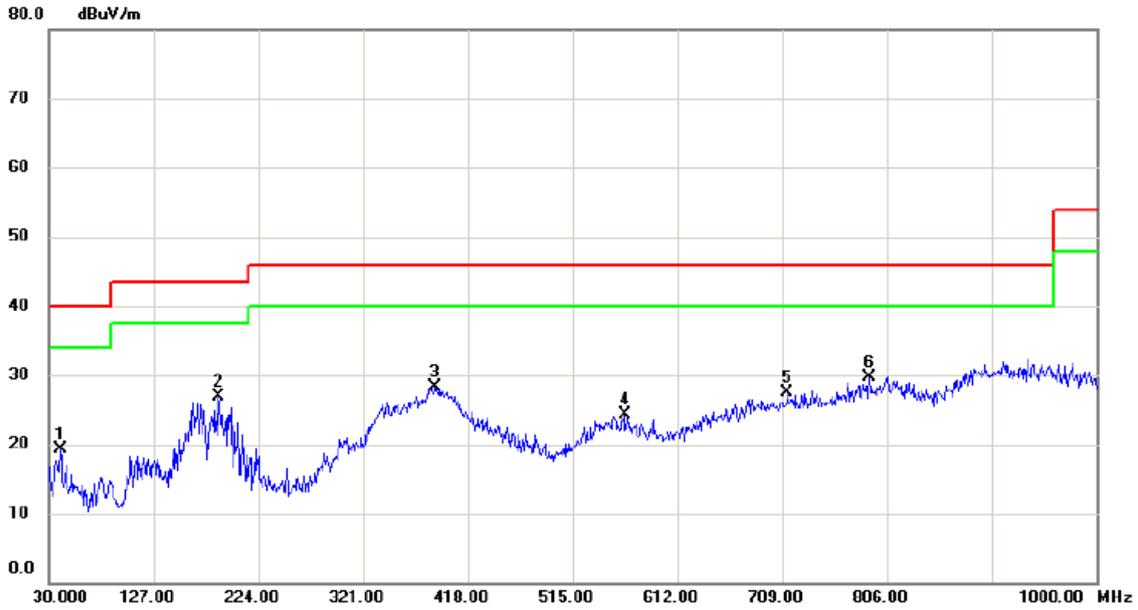

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	33.06	-13.77	19.29	40.00	-20.71	peak	
2		187.6250	40.59	-13.68	26.91	43.50	-16.59	peak	
3		387.9300	36.82	-8.61	28.21	46.00	-17.79	peak	
4		563.0150	29.46	-5.19	24.27	46.00	-21.73	peak	
5		713.8500	29.64	-2.07	27.57	46.00	-18.43	peak	
6	*	789.5100	29.89	-0.20	29.69	46.00	-16.31	peak	


Test Mode: UNII-2C/TX A Mode 5500MHz- Adapter: PHITEK

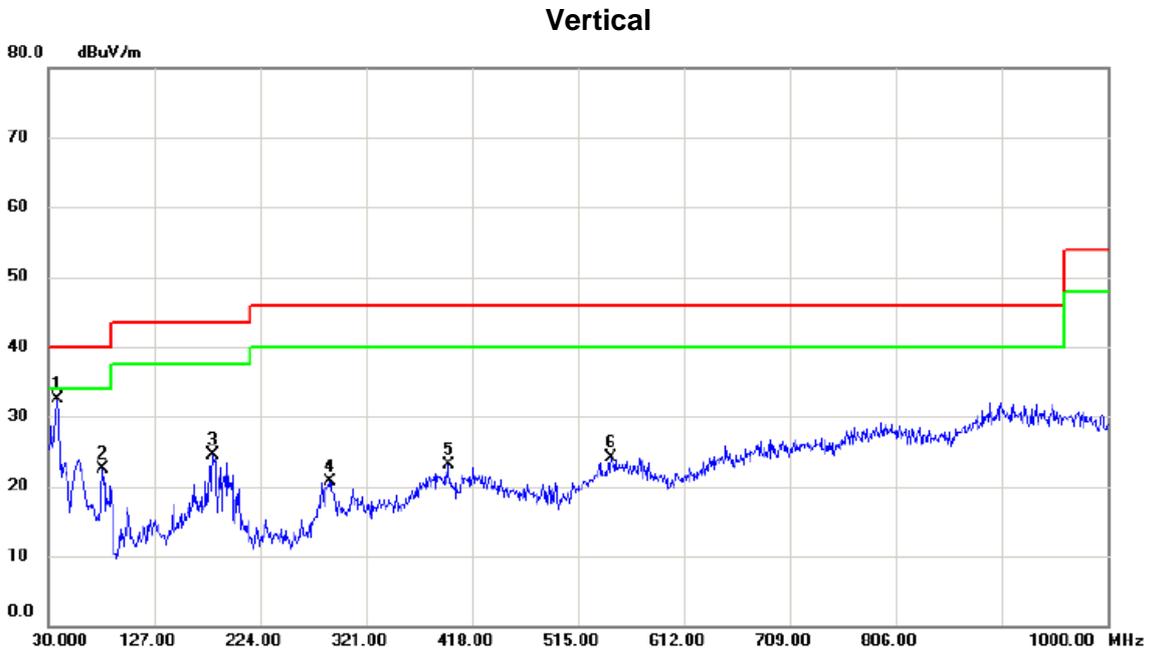

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	46.56	-14.06	32.50	40.00	-7.50	peak	
2		79.9550	38.48	-16.04	22.44	40.00	-17.56	peak	
3		180.8350	37.47	-12.93	24.54	43.50	-18.96	peak	
4		288.5050	32.03	-11.36	20.67	46.00	-25.33	peak	
5		396.1750	31.07	-8.04	23.03	46.00	-22.97	peak	
6		545.0700	29.17	-5.04	24.13	46.00	-21.87	peak	


Test Mode: UNII-2C/TX A Mode 5500MHz- Adapter: PHITEK

Horizontal

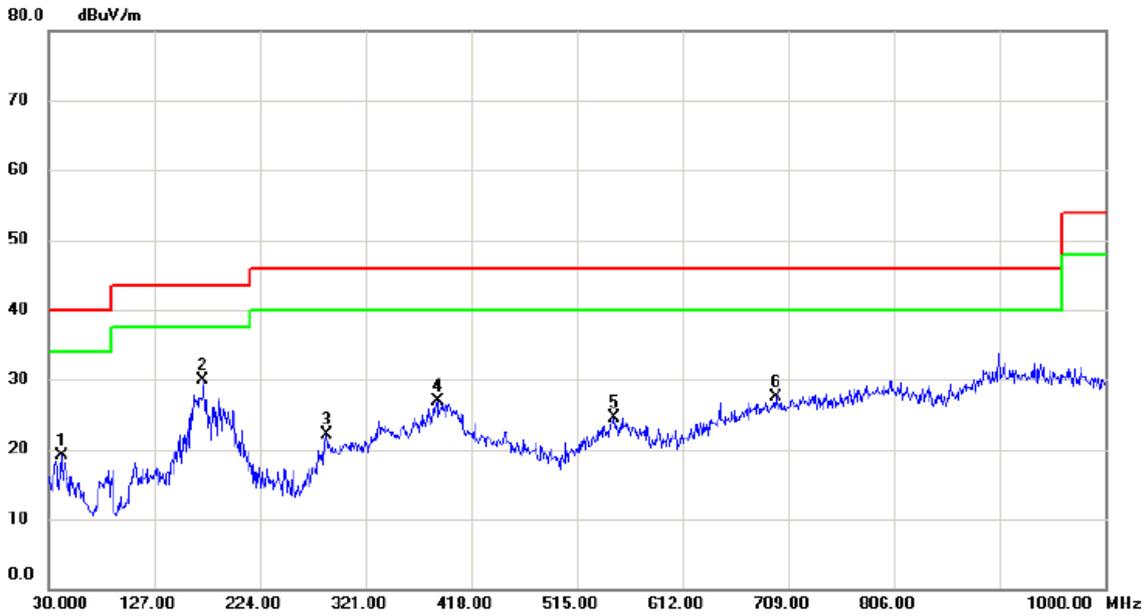

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		42.1250	32.51	-13.46	19.05	40.00	-20.95	peak	
2	*	171.6200	42.14	-12.33	29.81	43.50	-13.69	peak	
3		285.1100	33.80	-11.63	22.17	46.00	-23.83	peak	
4		386.9600	35.48	-8.67	26.81	46.00	-19.19	peak	
5		549.9200	29.09	-4.55	24.54	46.00	-21.46	peak	
6		697.3600	29.75	-2.21	27.54	46.00	-18.46	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz- Adapter: PHITEK

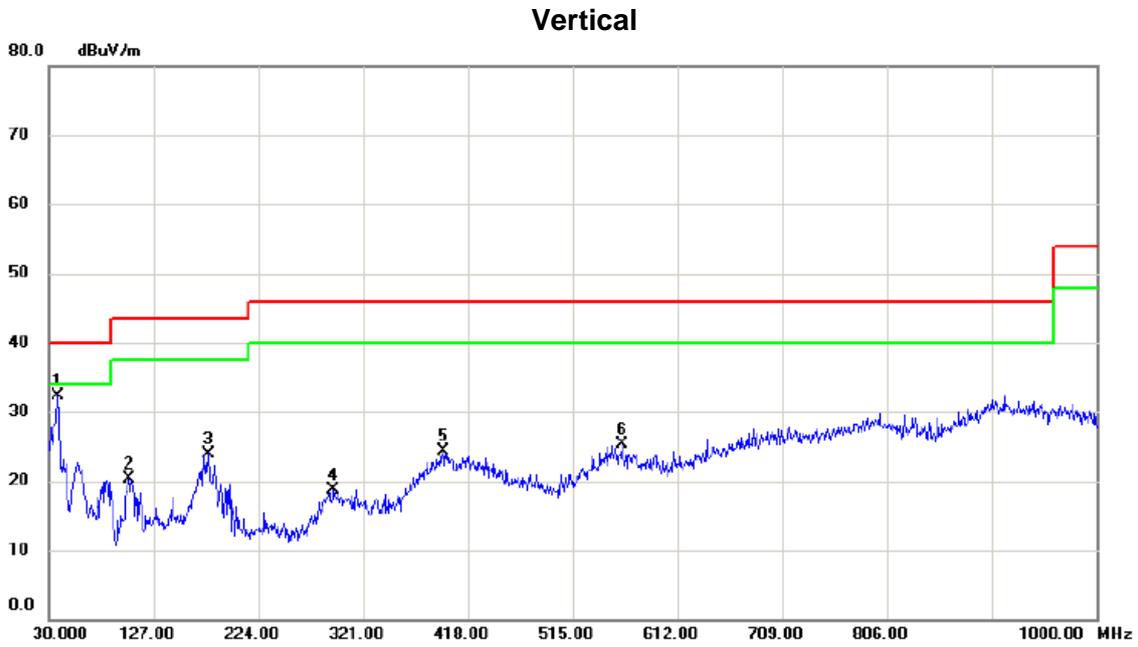

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.2450	46.51	-14.12	32.39	40.00	-7.61	peak	
2		104.2050	35.44	-15.12	20.32	43.50	-23.18	peak	
3		177.4400	36.68	-12.68	24.00	43.50	-19.50	peak	
4		293.8400	29.50	-10.83	18.67	46.00	-27.33	peak	
5		394.7200	32.43	-8.14	24.29	46.00	-21.71	peak	
6		561.0750	30.41	-5.10	25.31	46.00	-20.69	peak	


Test Mode: UNII-2C/TX A Mode 5700MHz- Adapter: PHITEK

Horizontal




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.1550	31.28	-13.67	17.61	40.00	-22.39	peak	
2	*	171.6200	39.34	-12.33	27.01	43.50	-16.49	peak	
3		345.2500	37.31	-11.11	26.20	46.00	-19.80	peak	
4		393.2650	37.28	-8.24	29.04	46.00	-16.96	peak	
5		549.4350	29.91	-4.60	25.31	46.00	-20.69	peak	
6		699.7850	29.89	-2.11	27.78	46.00	-18.22	peak	

Test Mode: UNII-3/TX A Mode 5745MHz- Adapter: PHITEK

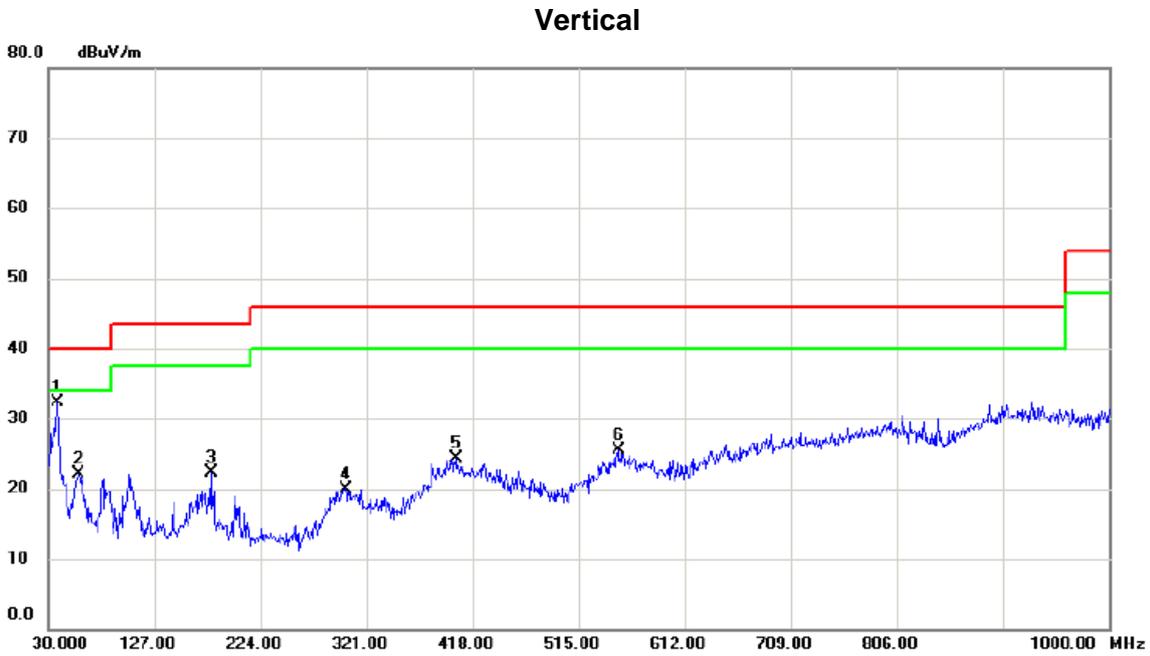


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.2450	46.34	-14.12	32.22	40.00	-7.78	peak	
2		57.6450	35.87	-13.73	22.14	40.00	-17.86	peak	
3		178.8950	35.06	-12.77	22.29	43.50	-21.21	peak	
4		302.0850	30.21	-10.21	20.00	46.00	-26.00	peak	
5		402.9650	32.16	-7.79	24.37	46.00	-21.63	peak	
6		551.3750	30.15	-4.61	25.54	46.00	-20.46	peak	

Test Mode: UNII-3/TX A Mode 5745MHz- Adapter: PHITEK

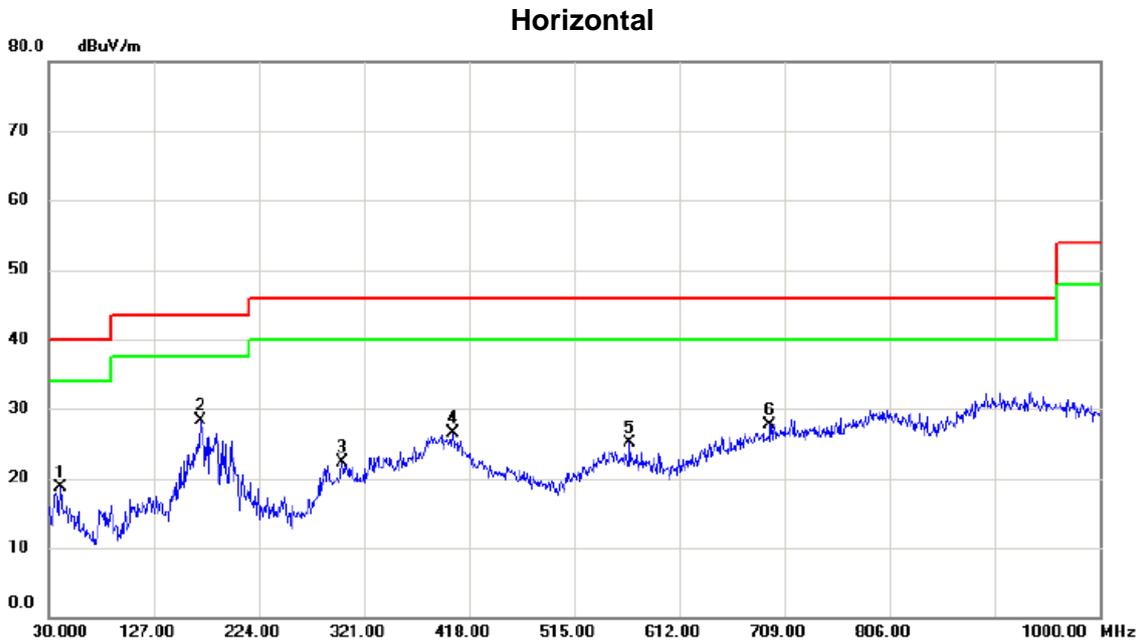

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	32.52	-13.77	18.75	40.00	-21.25	peak	
2	*	170.1650	40.58	-12.25	28.33	43.50	-15.17	peak	
3		300.6300	32.48	-10.17	22.31	46.00	-23.69	peak	
4		402.4800	34.35	-7.80	26.55	46.00	-19.45	peak	
5		566.4100	30.50	-5.37	25.13	46.00	-20.87	peak	
6		695.9050	29.99	-2.27	27.72	46.00	-18.28	peak	


Test Mode: UNII-3/TX A Mode 5825MHz- Adapter: PHITEK

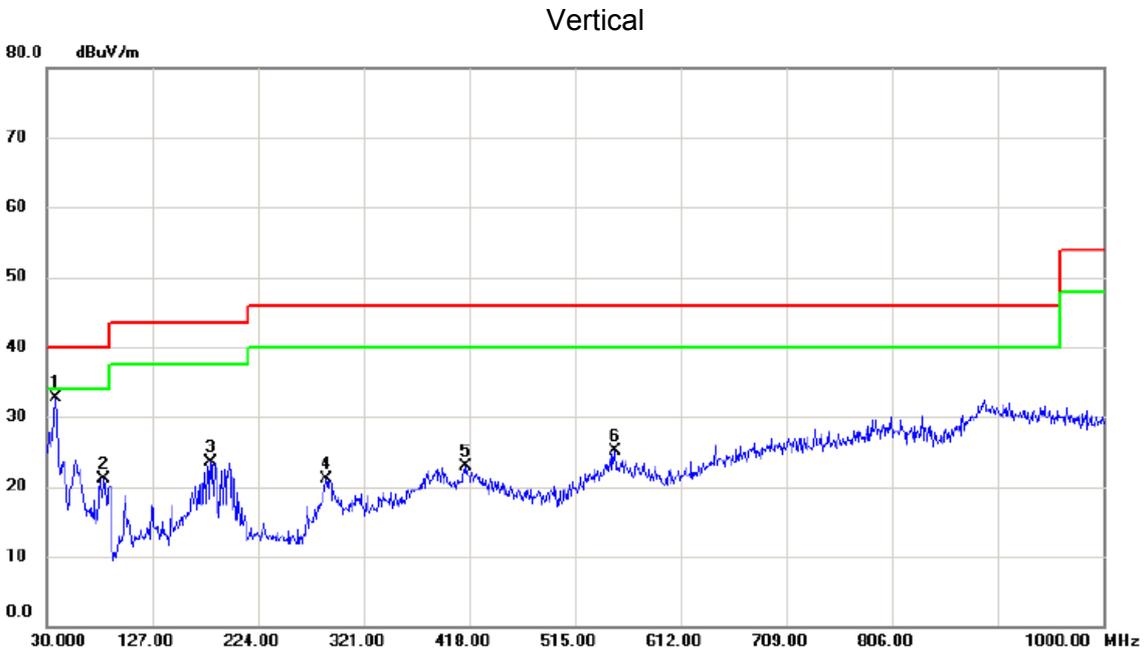

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.2450	46.75	-14.12	32.63	40.00	-7.37	peak	
2		81.8950	37.57	-16.56	21.01	40.00	-18.99	peak	
3		180.8350	36.41	-12.93	23.48	43.50	-20.02	peak	
4		286.5650	32.66	-11.52	21.14	46.00	-24.86	peak	
5		415.0900	30.82	-7.85	22.97	46.00	-23.03	peak	
6		551.3750	29.78	-4.61	25.17	46.00	-20.83	peak	

Test Mode: UNII-3/TX A Mode 5825MHz- Adapter: PHITEK


Horizontal

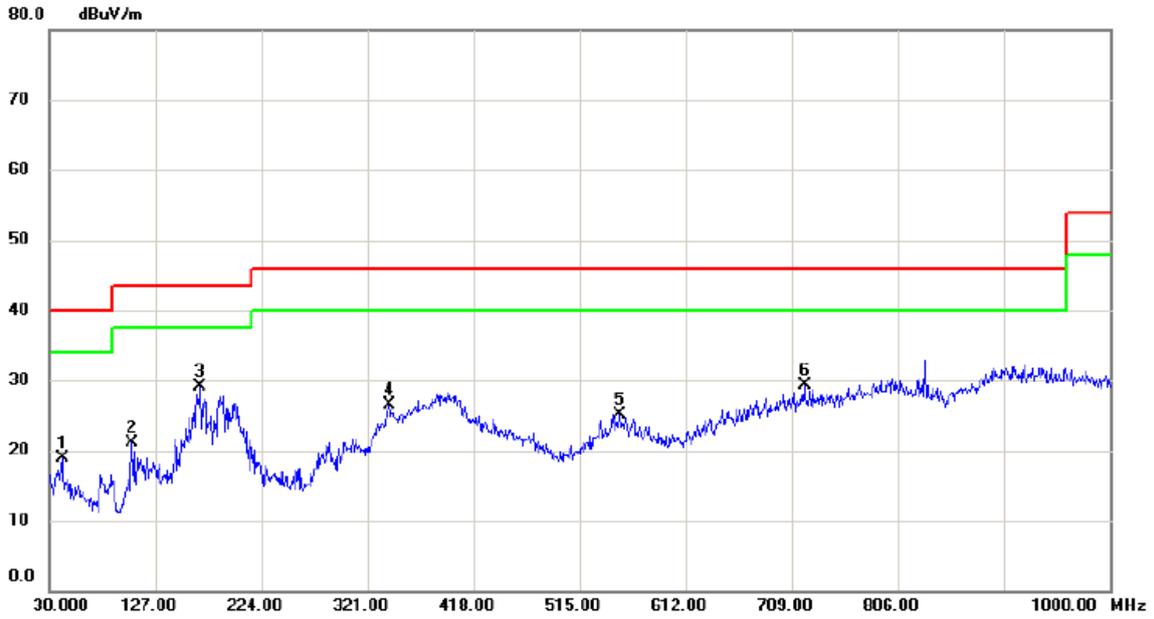

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		42.1250	32.30	-13.46	18.84	40.00	-21.16	peak	
2		106.1450	36.08	-14.97	21.11	43.50	-22.39	peak	
3	*	167.7400	41.28	-12.22	29.06	43.50	-14.44	peak	
4		340.4000	37.59	-11.02	26.57	46.00	-19.43	peak	
5		551.8600	29.75	-4.63	25.12	46.00	-20.88	peak	
6		720.6400	31.25	-2.04	29.21	46.00	-16.79	peak	

Test Mode: UNII-1/TX A Mode 5180MHz- Adapter: Huntkey

Vertical

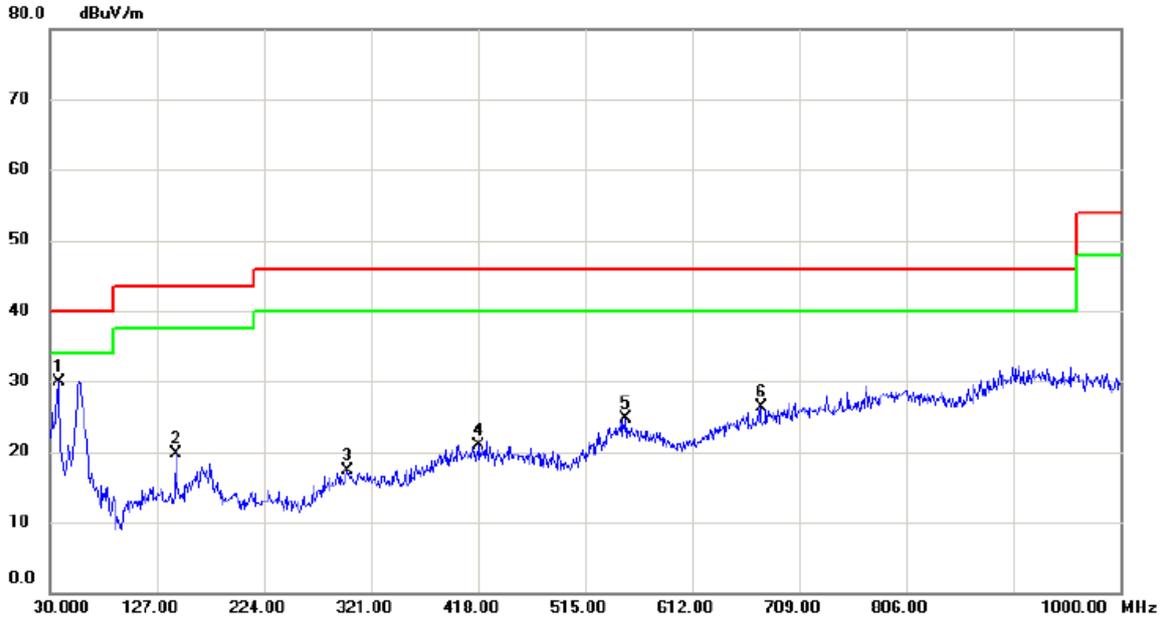

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	44.05	-14.09	29.96	40.00	-10.04	peak	
2		143.9750	33.23	-13.43	19.80	43.50	-23.70	peak	
3		299.6600	27.43	-10.19	17.24	46.00	-28.76	peak	
4		418.9700	28.78	-7.87	20.91	46.00	-25.09	peak	
5		551.8600	29.40	-4.63	24.77	46.00	-21.23	peak	
6		674.5650	29.53	-3.17	26.36	46.00	-19.64	peak	

Test Mode: UNII-1/TX A Mode 5180MHz- Adapter: Huntkey


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.6400	32.72	-13.56	19.16	40.00	-20.84	peak	
2		159.0100	35.31	-12.22	23.09	43.50	-20.41	peak	
3		309.8450	29.02	-10.37	18.65	46.00	-27.35	peak	
4		406.8450	29.76	-7.81	21.95	46.00	-24.05	peak	
5		546.0400	30.18	-4.96	25.22	46.00	-20.78	peak	
6	*	702.2100	30.22	-2.10	28.12	46.00	-17.88	peak	

Test Mode: UNII-1/TX A Mode 5240MHz- Adapter: Huntkey


Vertical

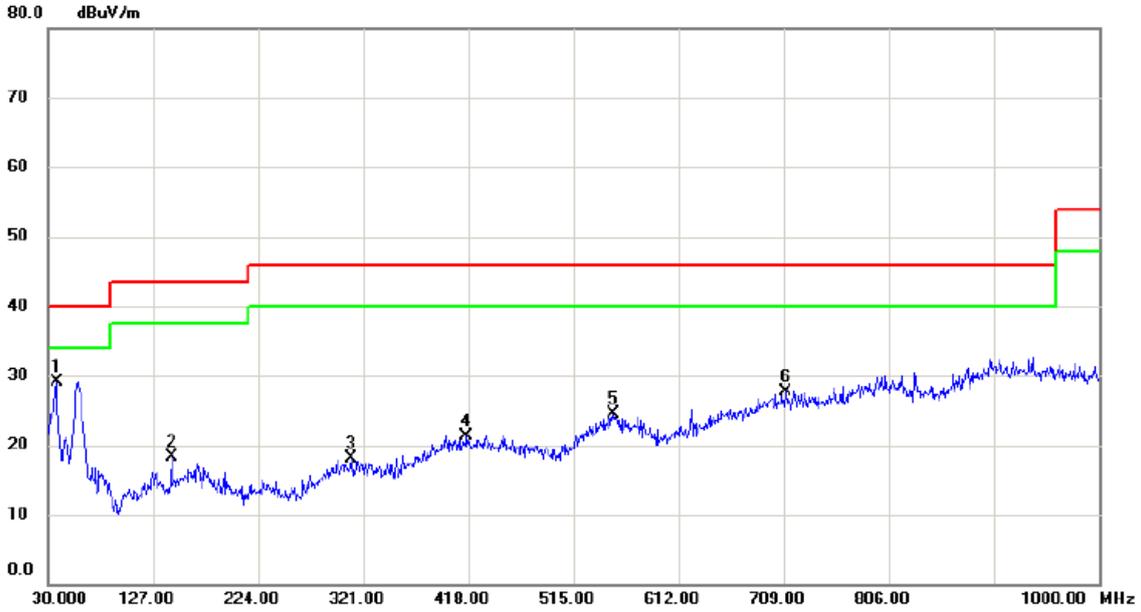

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	43.22	-14.09	29.13	40.00	-10.87	peak	
2		143.9750	31.68	-13.43	18.25	43.50	-25.25	peak	
3		309.3600	28.53	-10.36	18.17	46.00	-27.83	peak	
4		416.0600	29.25	-7.85	21.40	46.00	-24.60	peak	
5		551.3750	29.06	-4.61	24.45	46.00	-21.55	peak	
6		711.4250	29.85	-2.07	27.78	46.00	-18.22	peak	


Test Mode: UNII-1/TX A Mode 5240MHz- Adapter: Huntkey

Horizontal

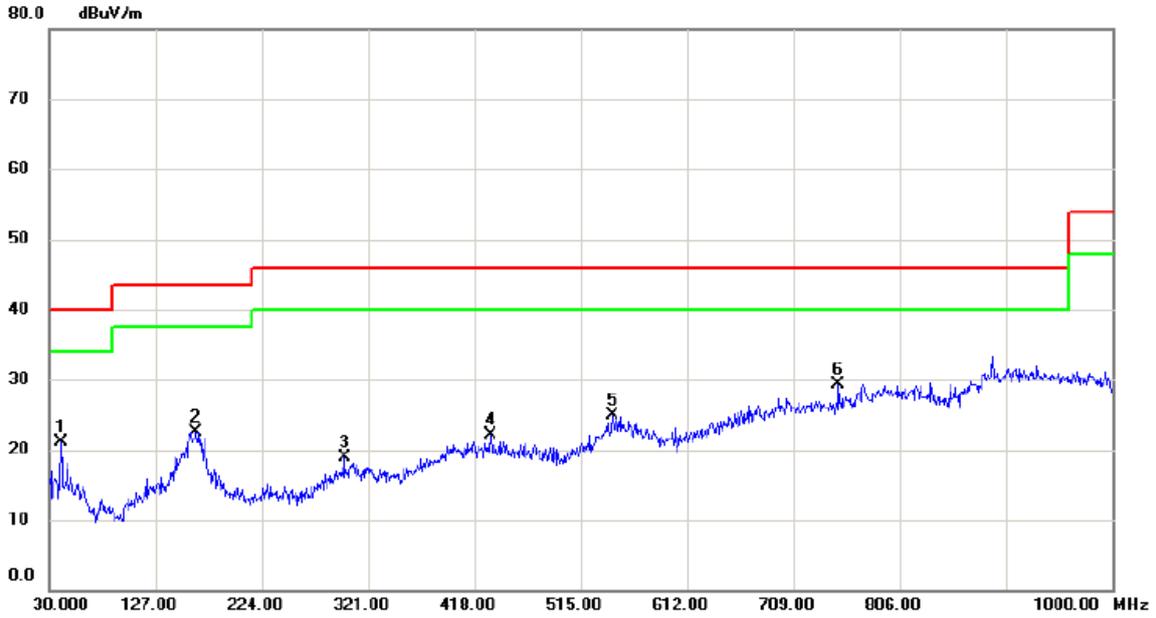

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	34.94	-13.77	21.17	40.00	-18.83	peak	
2		163.8600	34.74	-12.18	22.56	43.50	-20.94	peak	
3		299.1750	29.20	-10.25	18.95	46.00	-27.05	peak	
4		432.5500	29.97	-7.93	22.04	46.00	-23.96	peak	
5		544.1000	30.01	-5.15	24.86	46.00	-21.14	peak	
6	*	750.2250	31.20	-1.96	29.24	46.00	-16.76	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz- Adapter: Huntkey

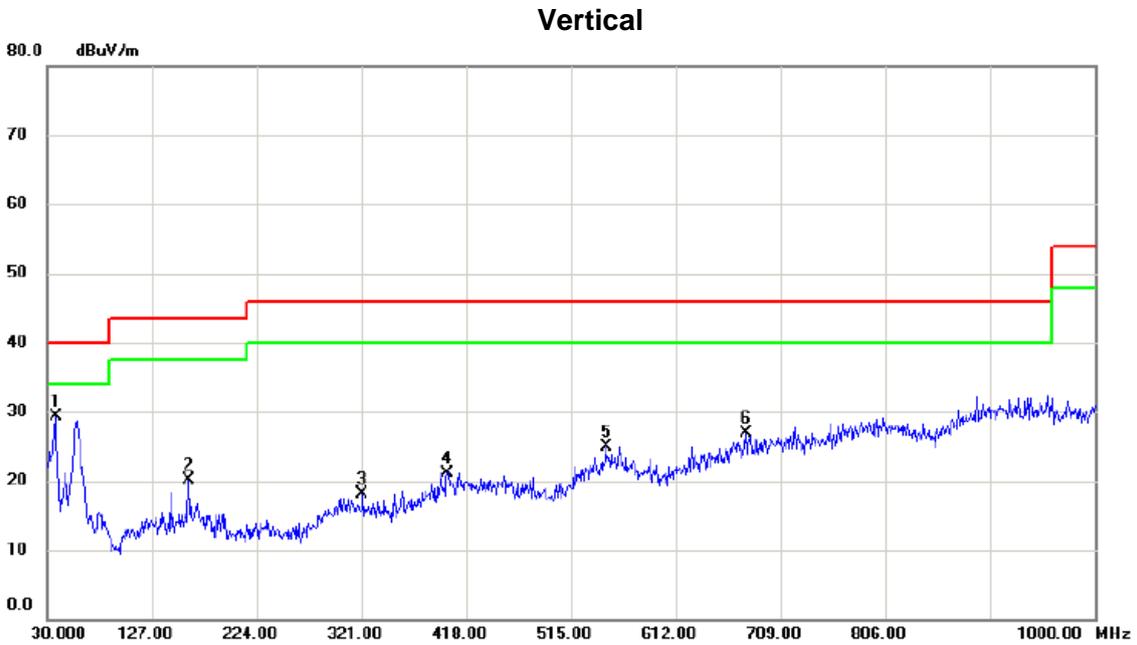

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	37.7600	43.36	-14.09	29.27	40.00	-10.73	peak	
2		161.4350	32.29	-12.16	20.13	43.50	-23.37	peak	
3		321.9700	28.71	-10.62	18.09	46.00	-27.91	peak	
4		400.5400	28.97	-7.78	21.19	46.00	-24.81	peak	
5		547.4950	29.80	-4.80	25.00	46.00	-21.00	peak	
6		676.9900	30.03	-3.05	26.98	46.00	-19.02	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz- Adapter: Huntkey

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		31.9400	31.78	-14.20	17.58	40.00	-22.42	peak	
2		164.3450	35.38	-12.19	23.19	43.50	-20.31	peak	
3		291.9000	28.95	-11.04	17.91	46.00	-28.09	peak	
4		403.4500	28.95	-7.79	21.16	46.00	-24.84	peak	
5		554.7700	29.65	-4.79	24.86	46.00	-21.14	peak	
6	*	705.6050	30.75	-2.08	28.67	46.00	-17.33	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz- Adapter: Huntkey


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.6750	43.63	-13.45	30.18	40.00	-9.82	peak	
2		167.7400	30.79	-12.22	18.57	43.50	-24.93	peak	
3		314.6950	28.95	-10.47	18.48	46.00	-27.52	peak	
4		401.5100	29.38	-7.79	21.59	46.00	-24.41	peak	
5		583.3850	30.91	-6.22	24.69	46.00	-21.31	peak	
6		709.9700	29.03	-2.08	26.95	46.00	-19.05	peak	


Test Mode: UNII-2A/TX A Mode 5320MHz- Adapter: Huntkey

Horizontal

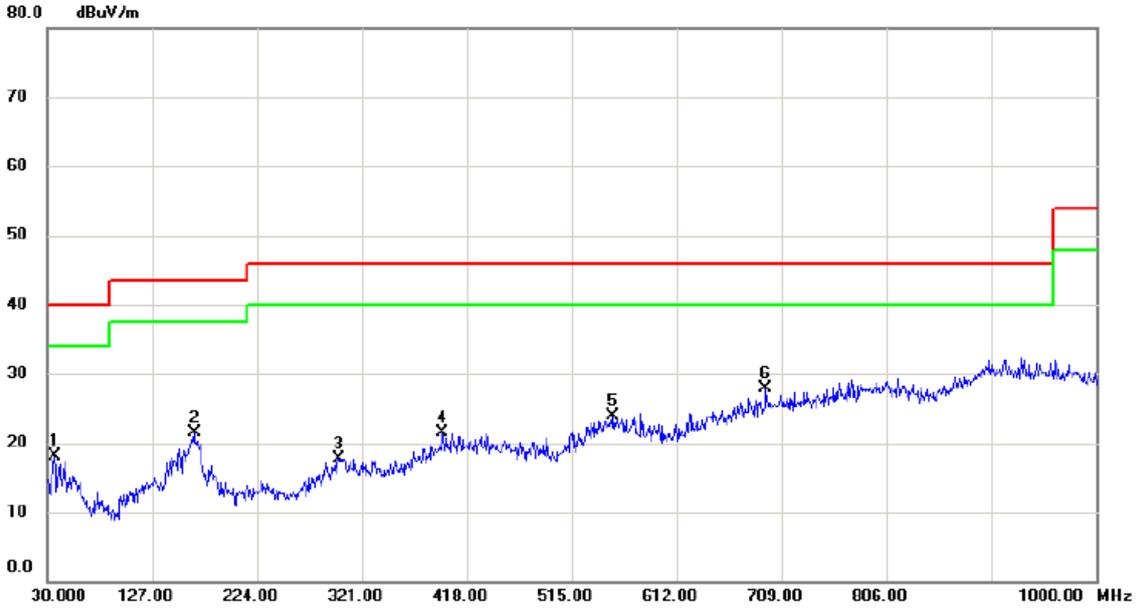

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		36.7900	31.94	-13.91	18.03	40.00	-21.97	peak	
2		165.8000	33.64	-12.21	21.43	43.50	-22.07	peak	
3		300.1450	27.96	-10.16	17.80	46.00	-28.20	peak	
4		395.6900	29.63	-8.08	21.55	46.00	-24.45	peak	
5		553.8000	28.64	-4.73	23.91	46.00	-22.09	peak	
6	*	694.4500	30.31	-2.33	27.98	46.00	-18.02	peak	


Test Mode: UNII-2C/TX A Mode 5500MHz- Adapter: Huntkey

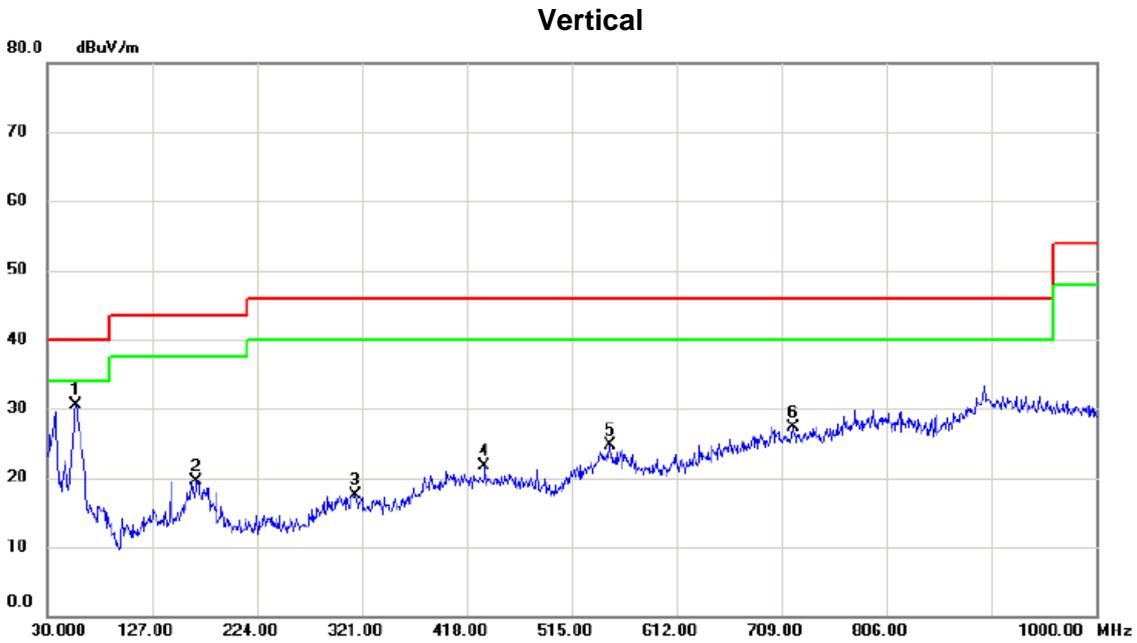

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.6750	43.96	-13.45	30.51	40.00	-9.49	peak	
2		167.7400	31.77	-12.22	19.55	43.50	-23.95	peak	
3		315.1800	27.98	-10.47	17.51	46.00	-28.49	peak	
4		434.4900	29.70	-7.94	21.76	46.00	-24.24	peak	
5		550.4050	29.33	-4.56	24.77	46.00	-21.23	peak	
6		720.1550	29.44	-2.05	27.39	46.00	-18.61	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz- Adapter: Huntkey


Horizontal

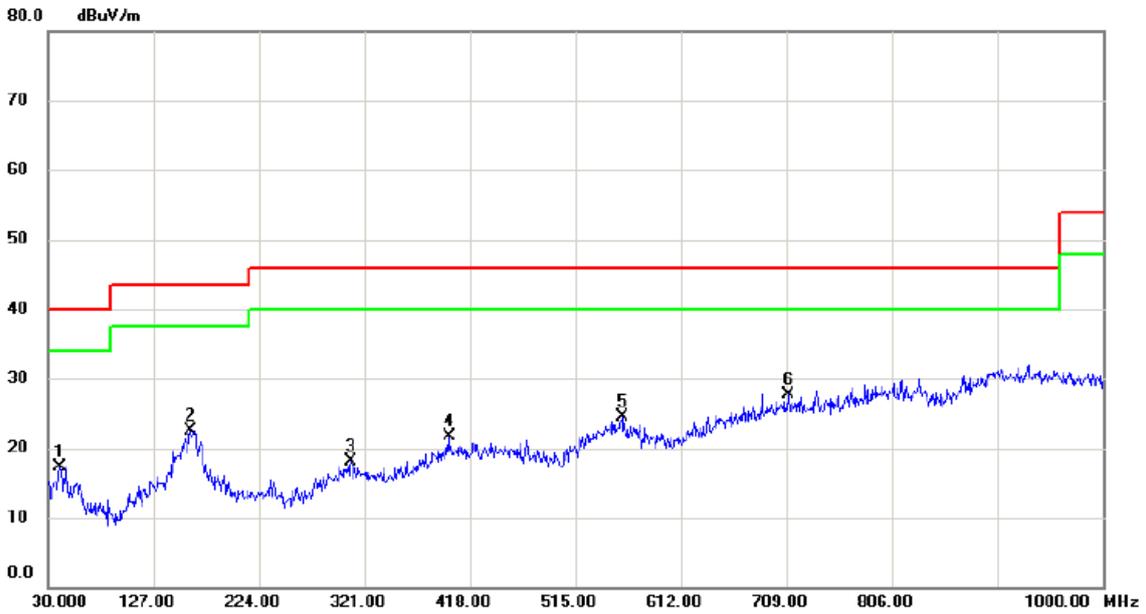

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	31.07	-13.77	17.30	40.00	-22.70	peak	
2		160.9500	34.70	-12.16	22.54	43.50	-20.96	peak	
3		308.8750	28.38	-10.35	18.03	46.00	-27.97	peak	
4		398.6000	29.50	-7.88	21.62	46.00	-24.38	peak	
5		558.1650	29.53	-4.95	24.58	46.00	-21.42	peak	
6	*	711.4250	29.80	-2.07	27.73	46.00	-18.27	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz- Adapter: Huntkey


Vertical

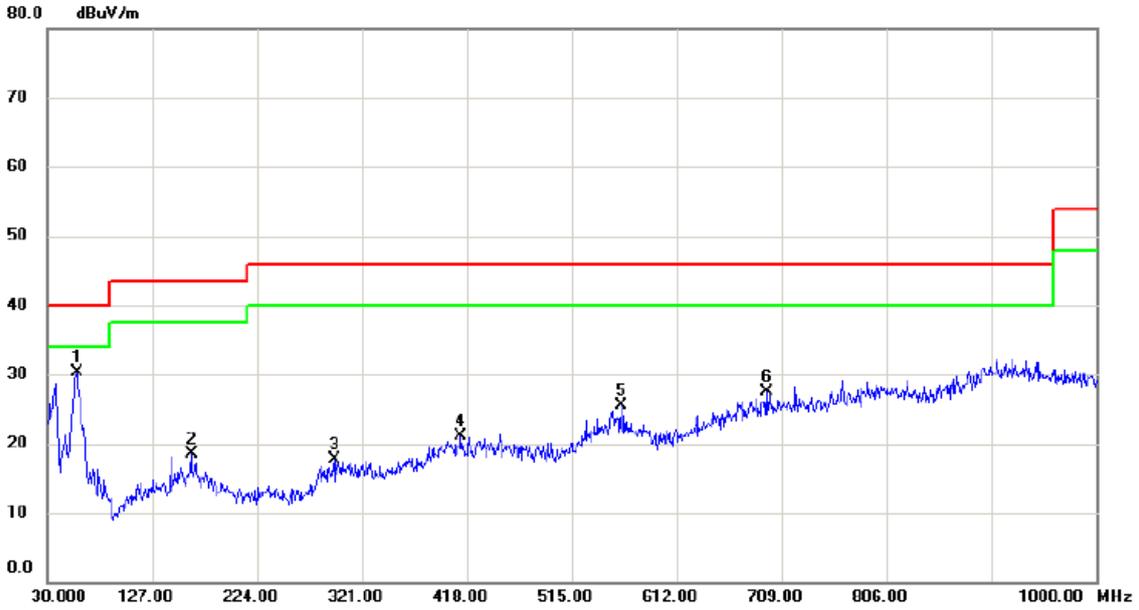

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.1600	43.93	-13.59	30.34	40.00	-9.66	peak	
2		163.3750	30.77	-12.18	18.59	43.50	-24.91	peak	
3		295.2950	28.30	-10.67	17.63	46.00	-28.37	peak	
4		412.6650	28.87	-7.84	21.03	46.00	-24.97	peak	
5		561.0750	30.57	-5.10	25.47	46.00	-20.53	peak	
6		694.9350	29.75	-2.31	27.44	46.00	-18.56	peak	


Test Mode: UNII-2C/TX A Mode 5700MHz- Adapter: Huntkey

Horizontal

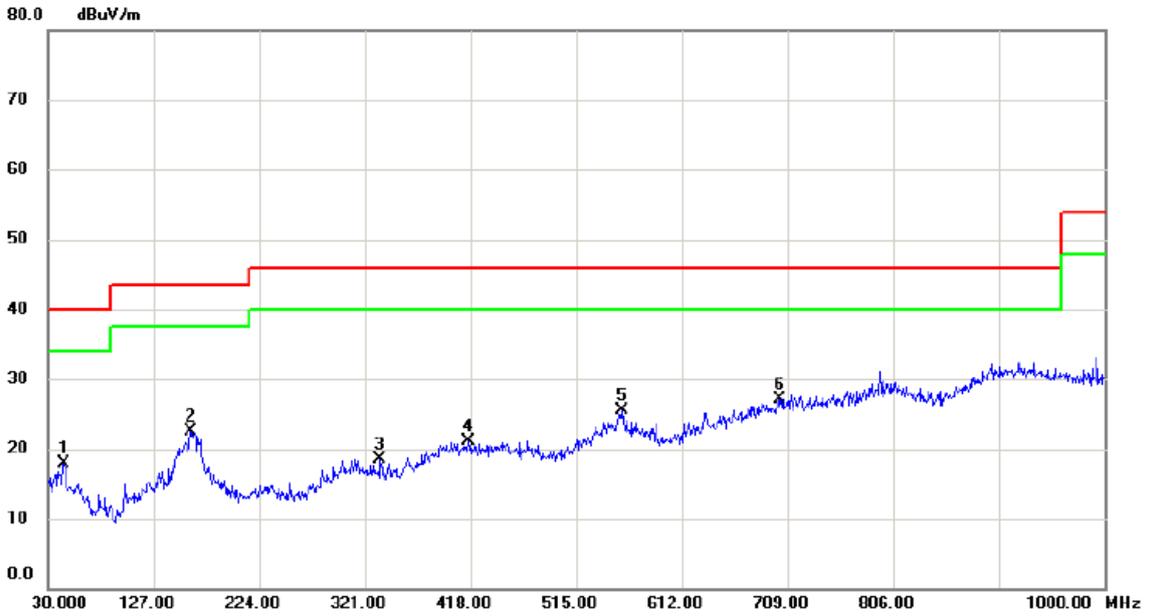

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		44.5500	30.88	-12.90	17.98	40.00	-22.02	peak	
2		161.4350	34.73	-12.16	22.57	43.50	-20.93	peak	
3		335.0650	29.43	-10.90	18.53	46.00	-27.47	peak	
4		415.5750	28.90	-7.85	21.05	46.00	-24.95	peak	
5		557.6800	30.41	-4.92	25.49	46.00	-20.51	peak	
6	*	701.2400	29.26	-2.09	27.17	46.00	-18.83	peak	

Test Mode: UNII-3/TX A Mode 5745MHz- Adapter: Huntkey

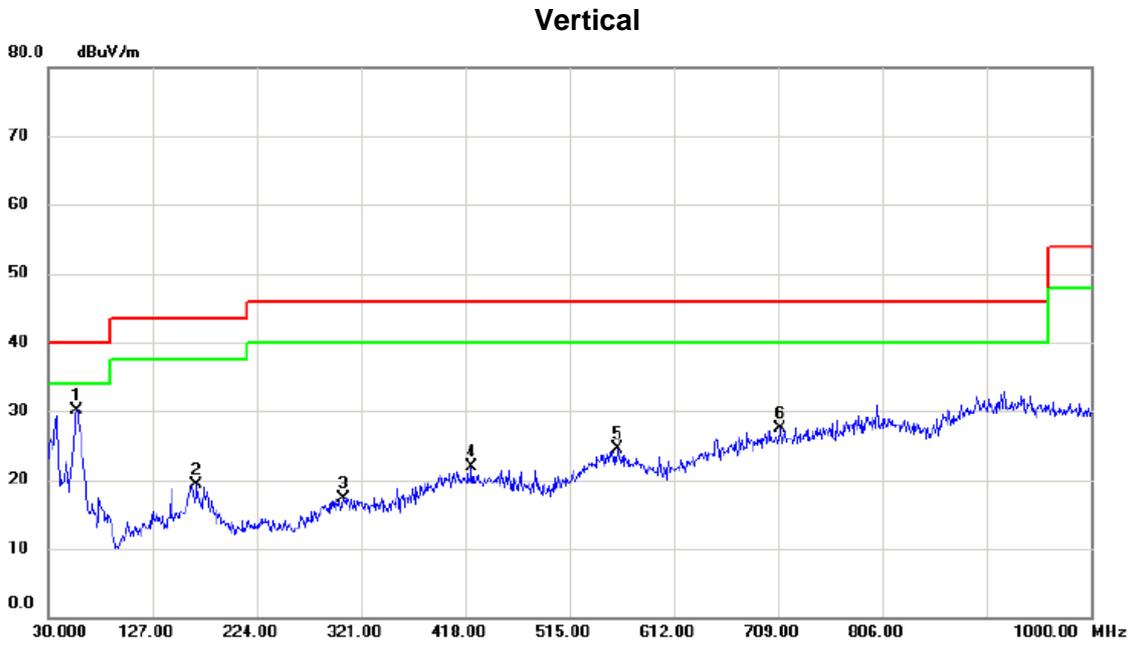

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.1900	43.35	-13.32	30.03	40.00	-9.97	peak	
2		168.2250	31.55	-12.22	19.33	43.50	-24.17	peak	
3		304.9950	27.65	-10.27	17.38	46.00	-28.62	peak	
4		423.8200	29.76	-7.89	21.87	46.00	-24.13	peak	
5		559.6200	29.57	-5.03	24.54	46.00	-21.46	peak	
6		710.9400	29.66	-2.06	27.60	46.00	-18.40	peak	

Test Mode: UNII-3/TX A Mode 5745MHz- Adapter: Huntkey


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		44.5500	32.75	-12.90	19.85	40.00	-20.15	peak	
2		165.8000	35.65	-12.21	23.44	43.50	-20.06	peak	
3		312.7550	28.94	-10.44	18.50	46.00	-27.50	peak	
4		395.6900	29.97	-8.08	21.89	46.00	-24.11	peak	
5		557.6800	30.41	-4.92	25.49	46.00	-20.51	peak	
6	*	793.8750	31.10	-0.01	31.09	46.00	-14.91	peak	


Test Mode: UNII-3/TX A Mode 5825MHz- Adapter: Huntkey

Vertical

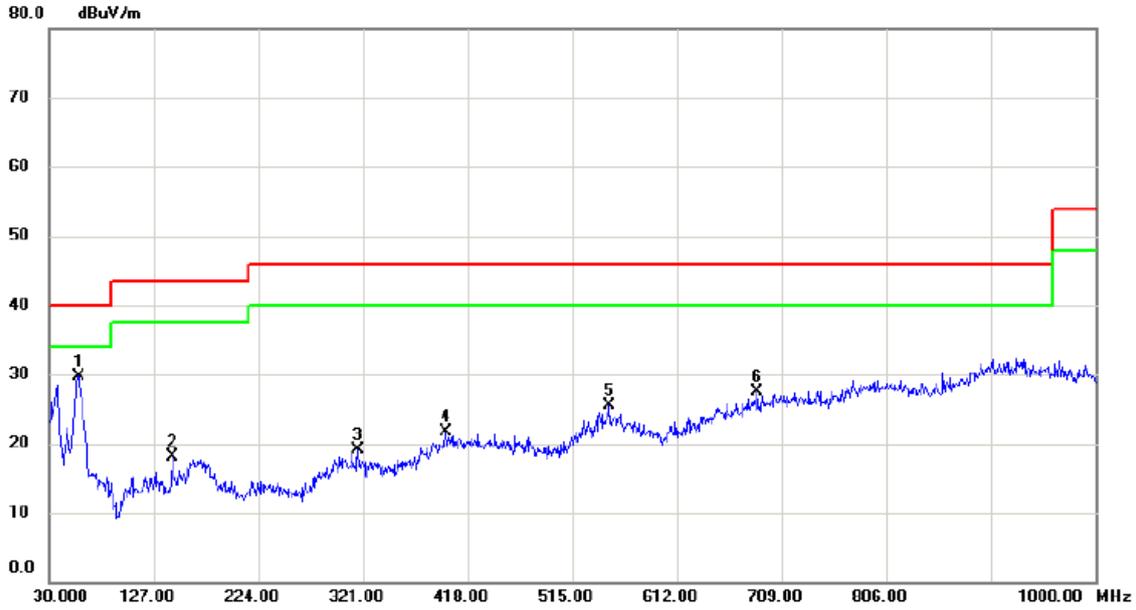

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.1600	43.29	-13.59	29.70	40.00	-10.30	peak	
2		143.9750	31.60	-13.43	18.17	43.50	-25.33	peak	
3		316.6350	29.70	-10.51	19.19	46.00	-26.81	peak	
4		398.1150	29.64	-7.91	21.73	46.00	-24.27	peak	
5		549.9200	30.10	-4.55	25.55	46.00	-20.45	peak	
6		685.7200	30.26	-2.69	27.57	46.00	-18.43	peak	

Test Mode: UNII-3/TX A Mode 5825MHz- Adapter: Huntkey

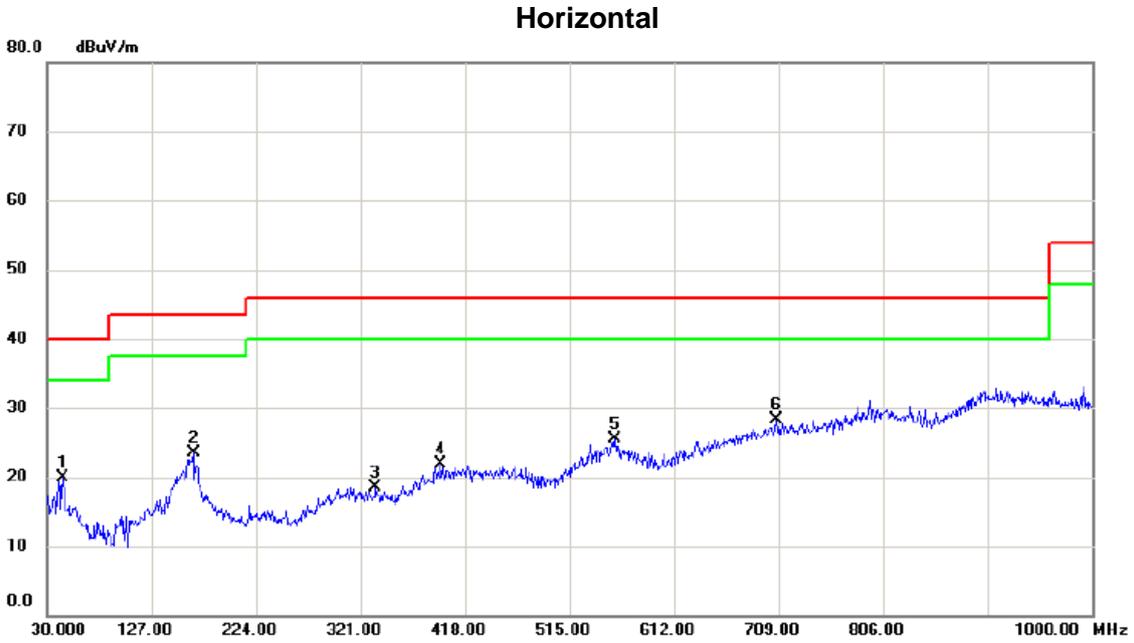


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		44.5500	32.75	-12.90	19.85	40.00	-20.15	peak	
2		165.8000	35.65	-12.21	23.44	43.50	-20.06	peak	
3		335.0650	29.43	-10.90	18.53	46.00	-27.47	peak	
4		395.6900	29.97	-8.08	21.89	46.00	-24.11	peak	
5		557.6800	30.41	-4.92	25.49	46.00	-20.51	peak	
6	*	707.0600	30.44	-2.08	28.36	46.00	-17.64	peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Vertical

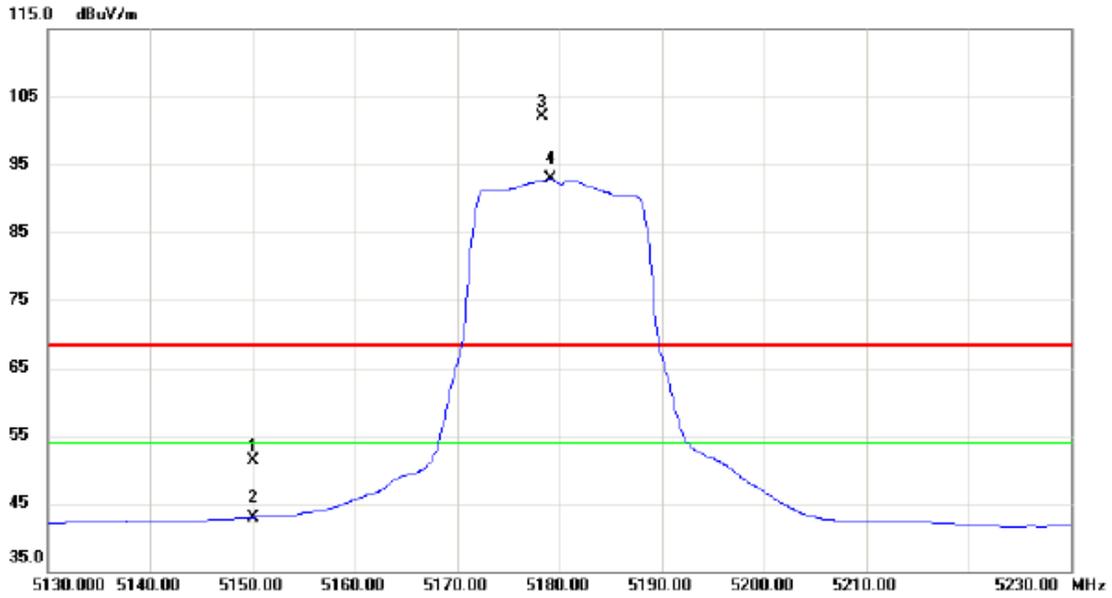


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	10.74	40.63	51.37	68.30	-16.93	peak	
2		5150.000	2.34	40.63	42.97	54.00	-11.03	AVG	
3	X	5178.300	61.36	40.72	102.08	68.30	33.78	peak	No Limit
4	*	5179.100	52.16	40.72	92.88	54.00	38.88	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

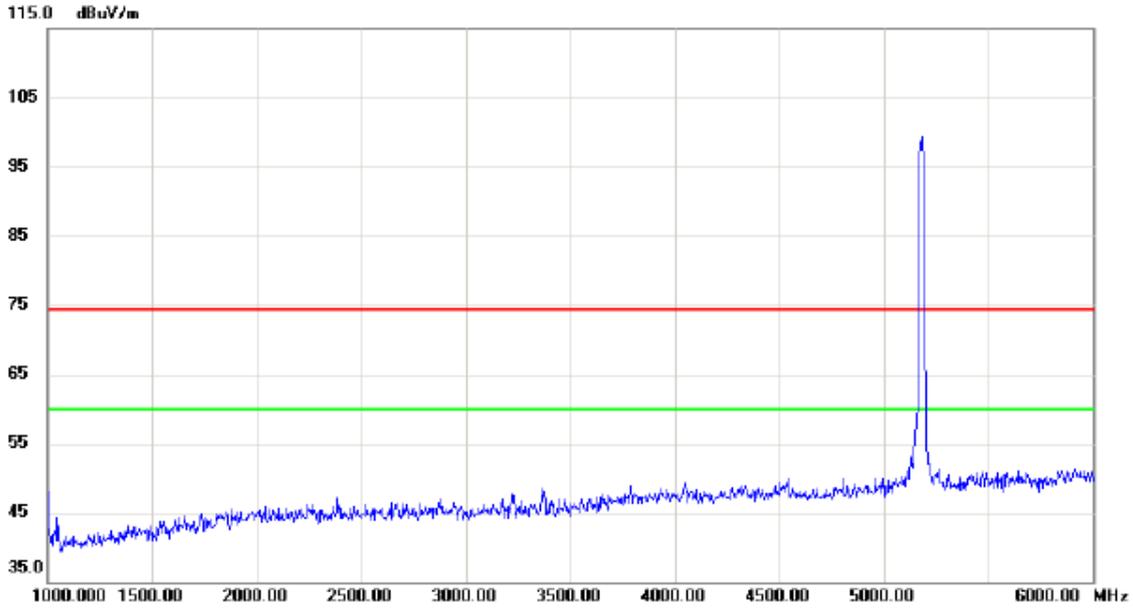


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

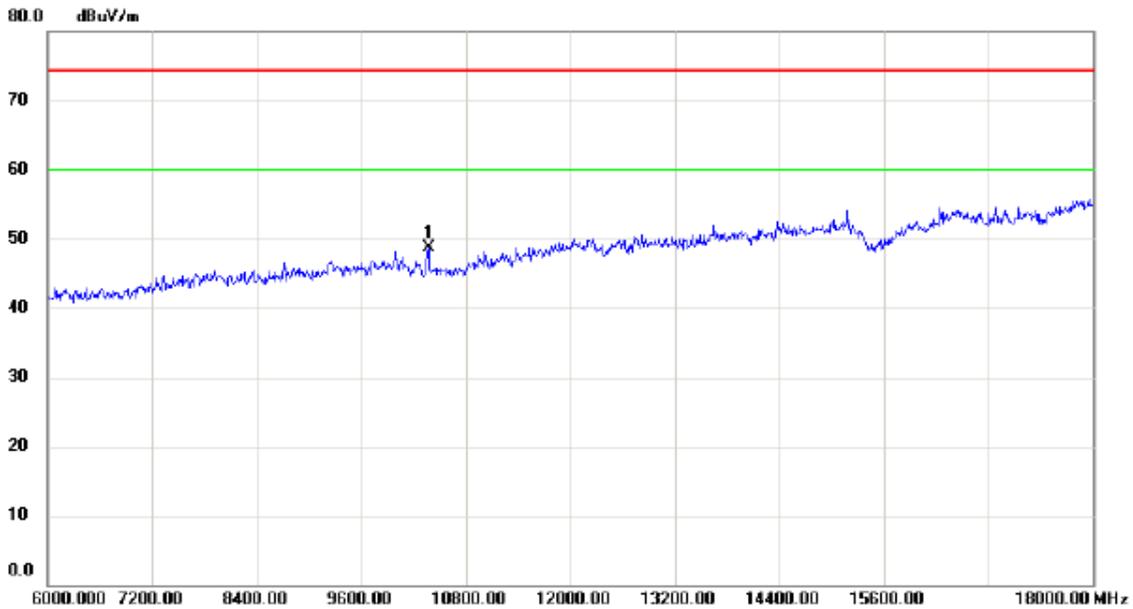


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10368.00	34.77	13.85	48.62	74.30	-25.68	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

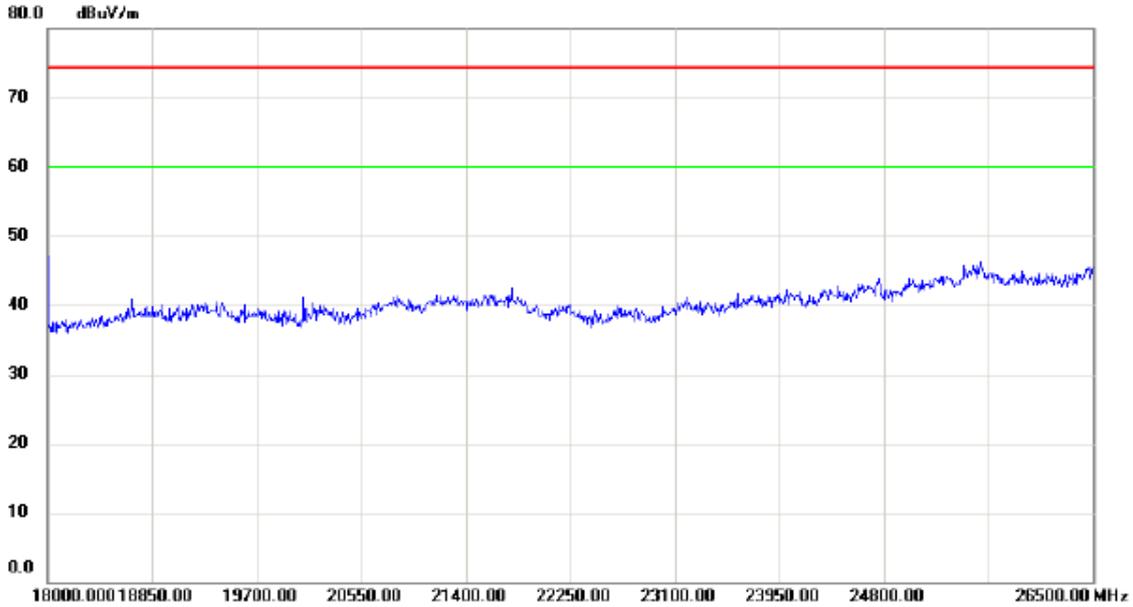


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

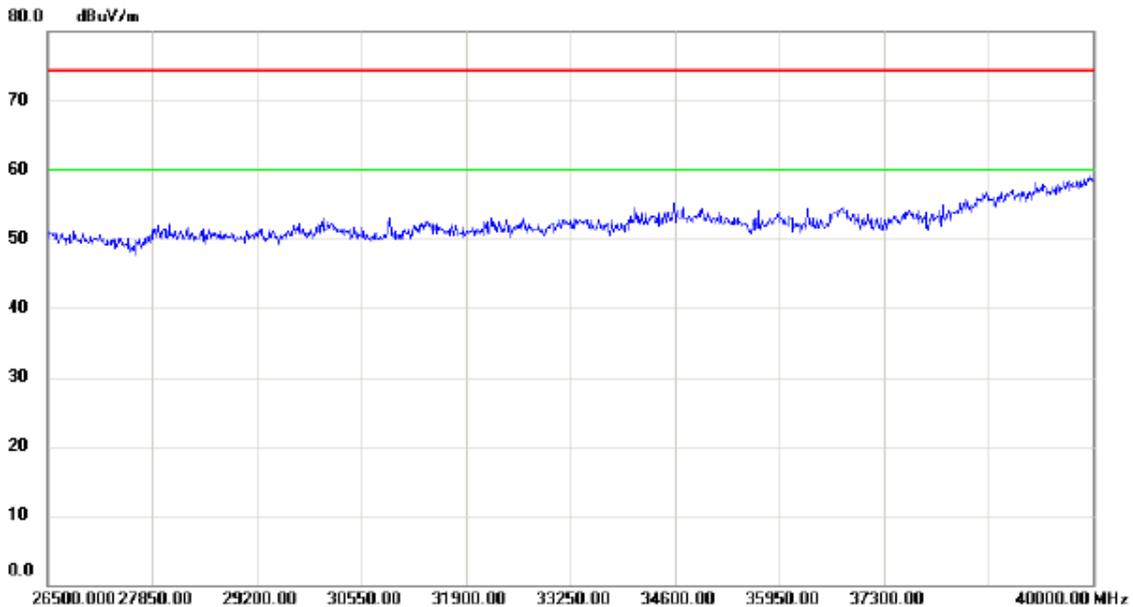

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Horizontal

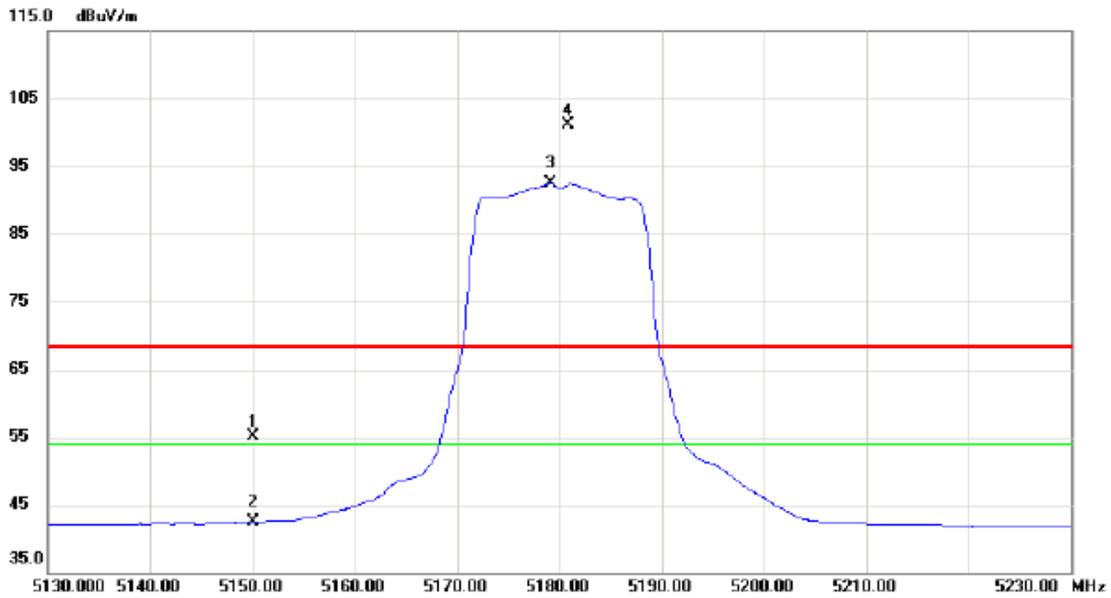


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	14.47	40.63	55.10	68.30	-13.20	peak	
2		5150.000	1.91	40.63	42.54	54.00	-11.46	AVG	
3	*	5179.100	51.72	40.72	92.44	54.00	38.44	AVG	No Limit
4	X	5180.900	60.47	40.72	101.19	68.30	32.89	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

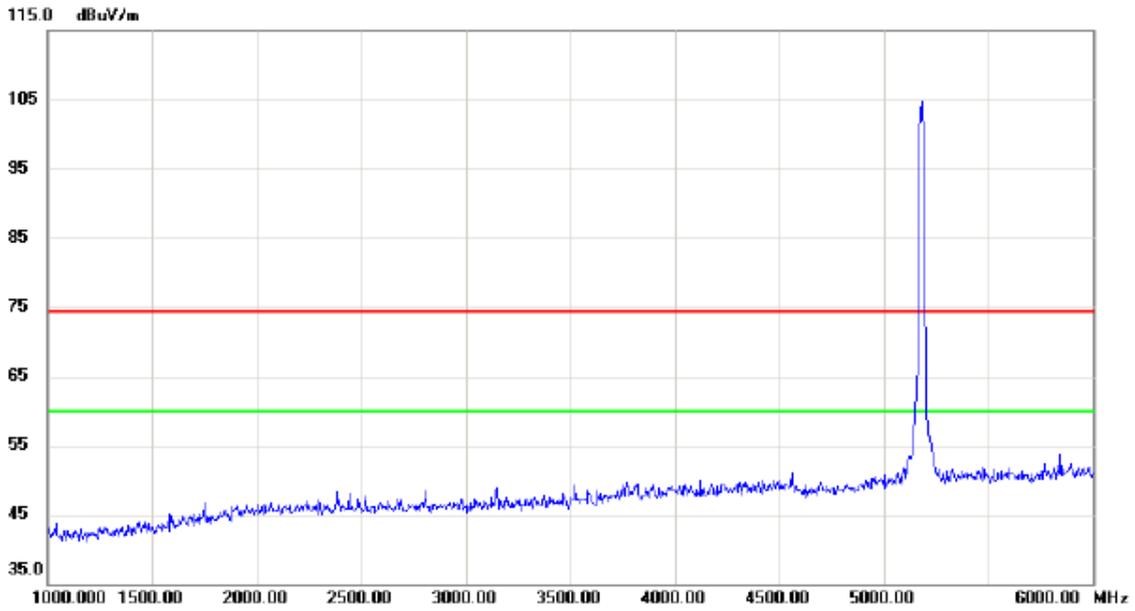


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

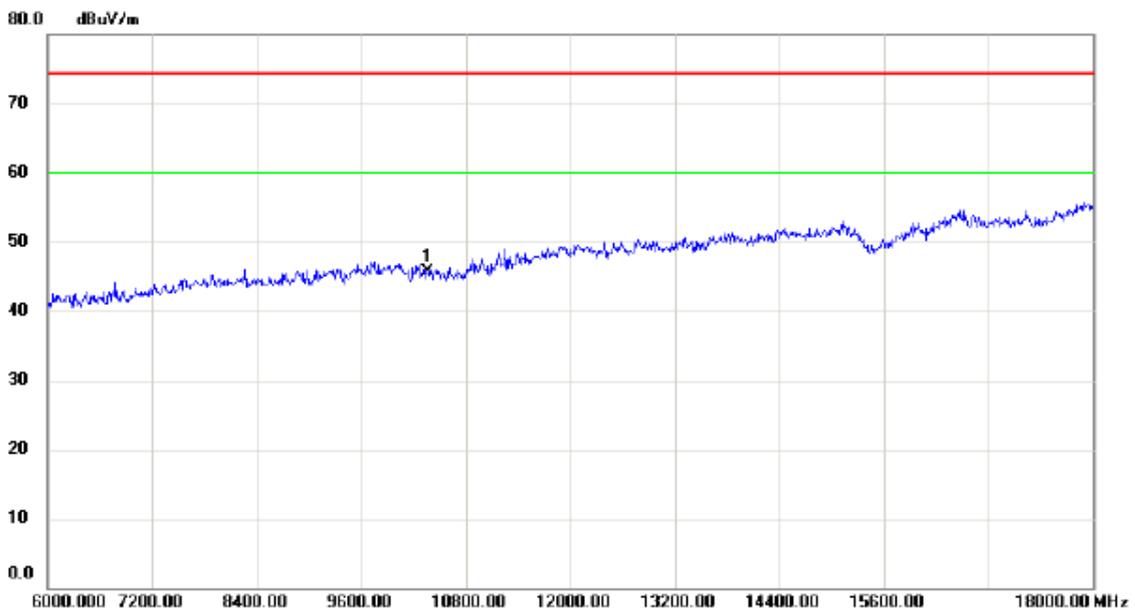


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10360.00	31.78	13.85	45.63	74.30	-28.67	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

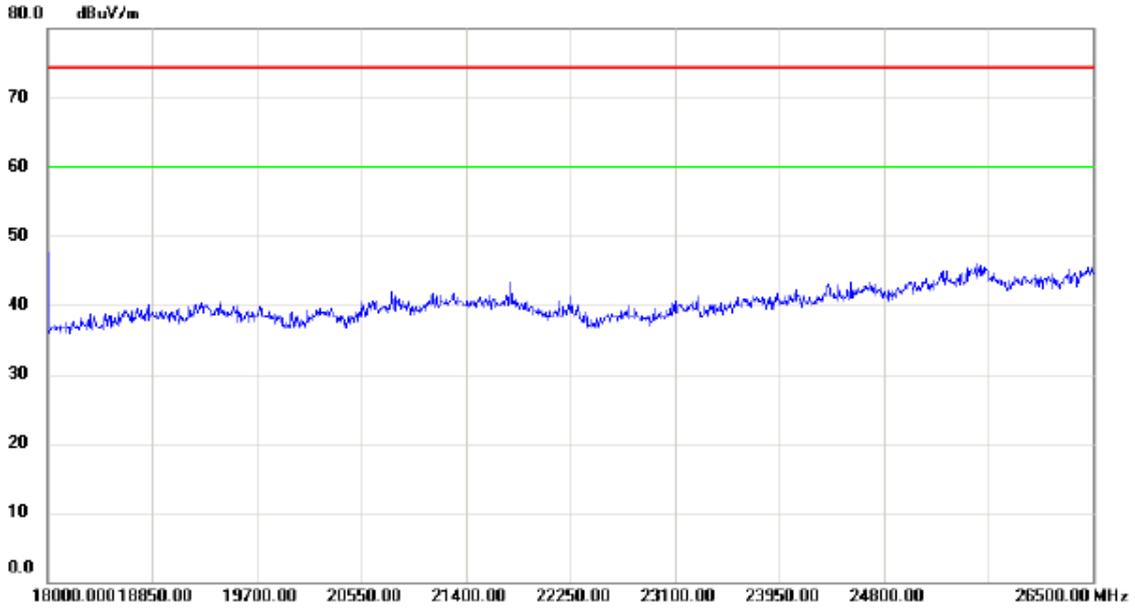


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

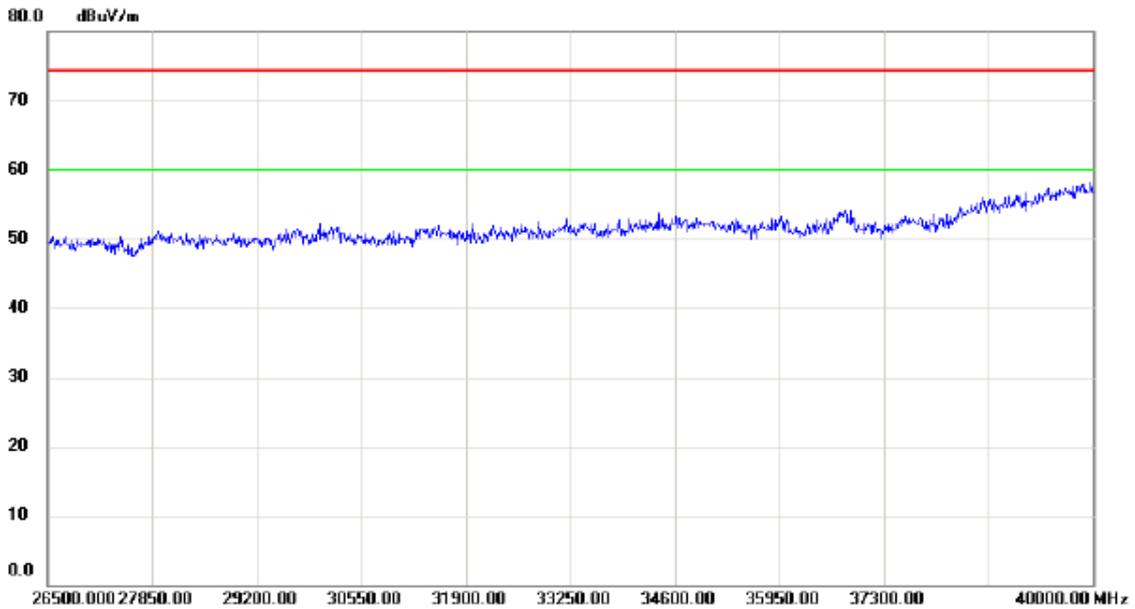

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

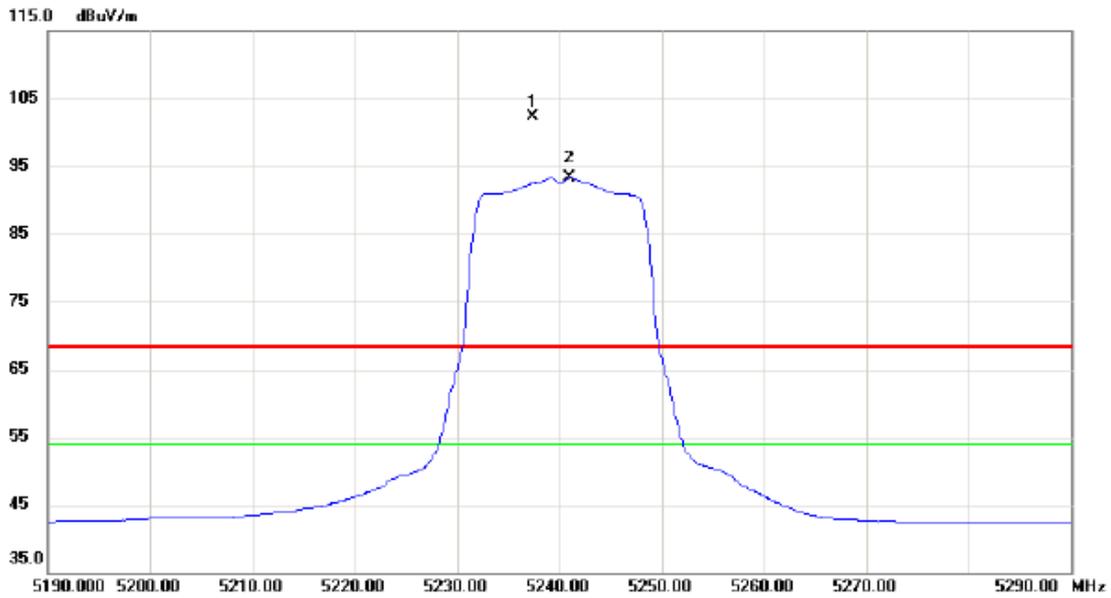


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5237.400	61.30	40.91	102.21	68.30	33.91	peak	No Limit
2	*	5241.000	52.31	40.93	93.24	54.00	39.24	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

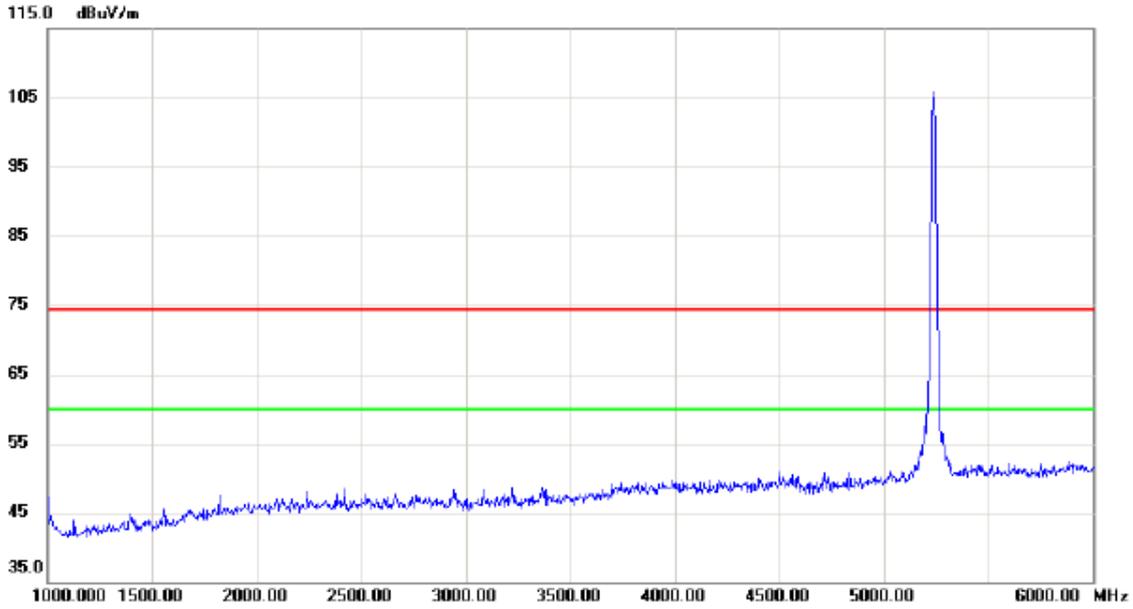


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

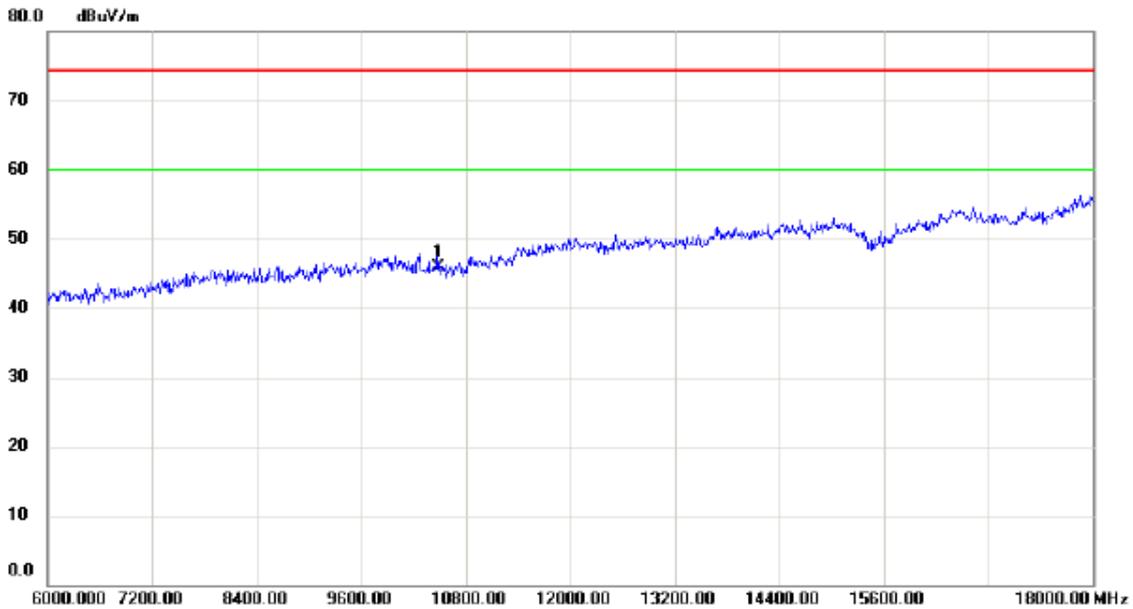


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10480.00	32.18	13.69	45.87	74.30	-28.43	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

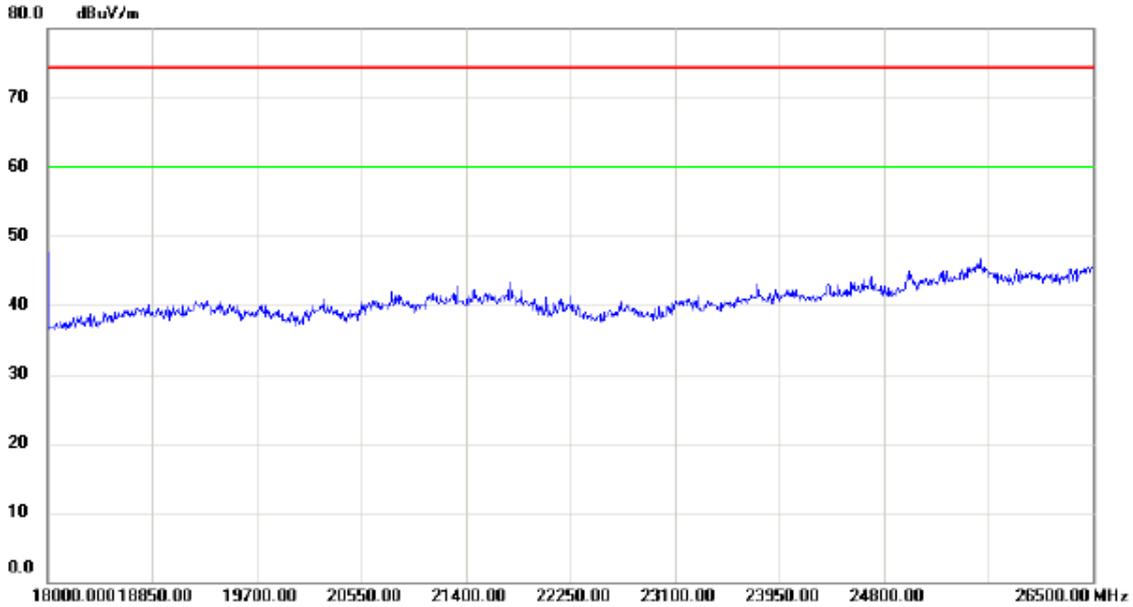


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

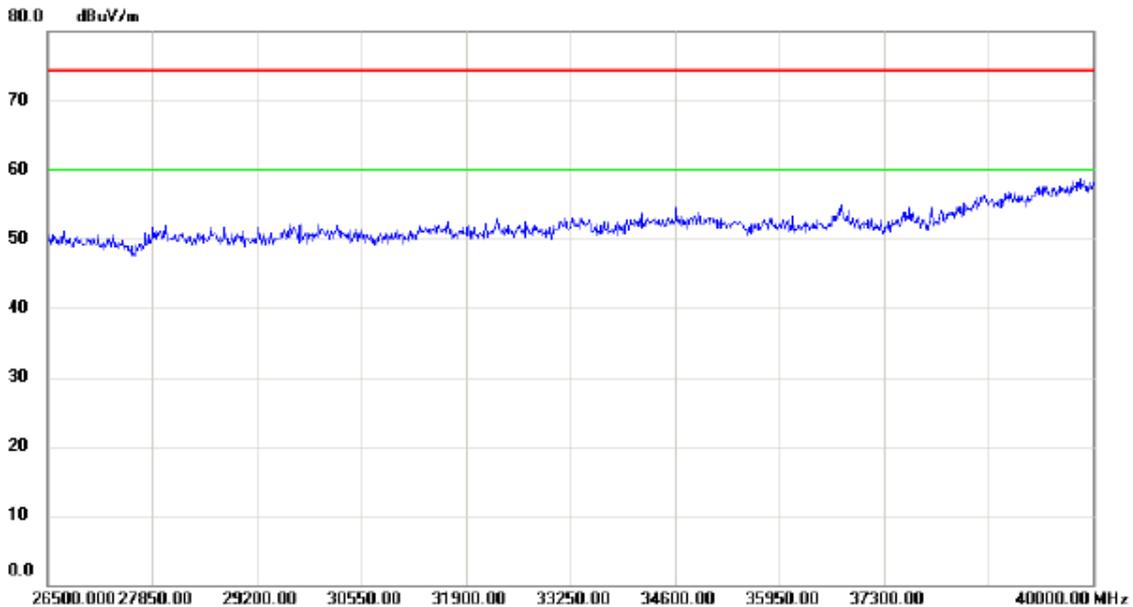

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Horizontal

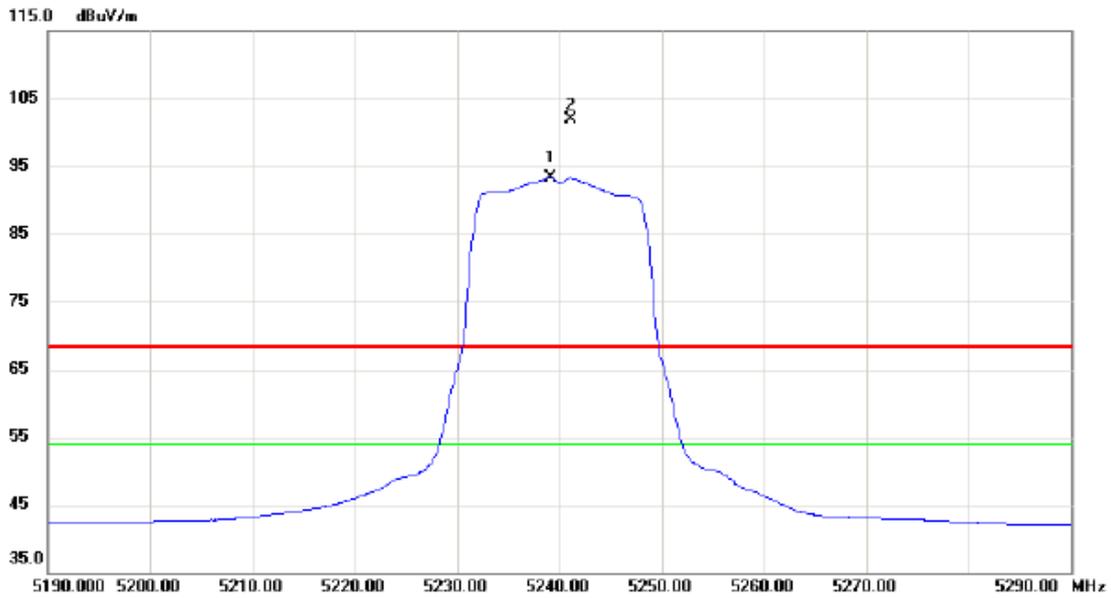


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5239.200	52.36	40.92	93.28	54.00	39.28	AVG	No Limit
2	X	5241.100	60.98	40.93	101.91	68.30	33.61	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

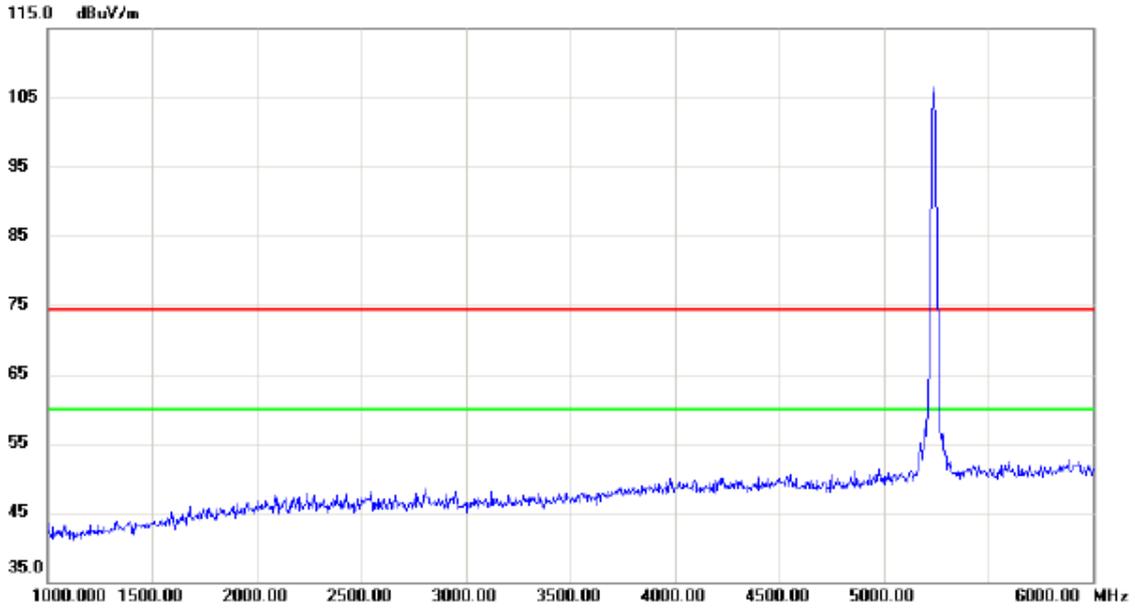


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

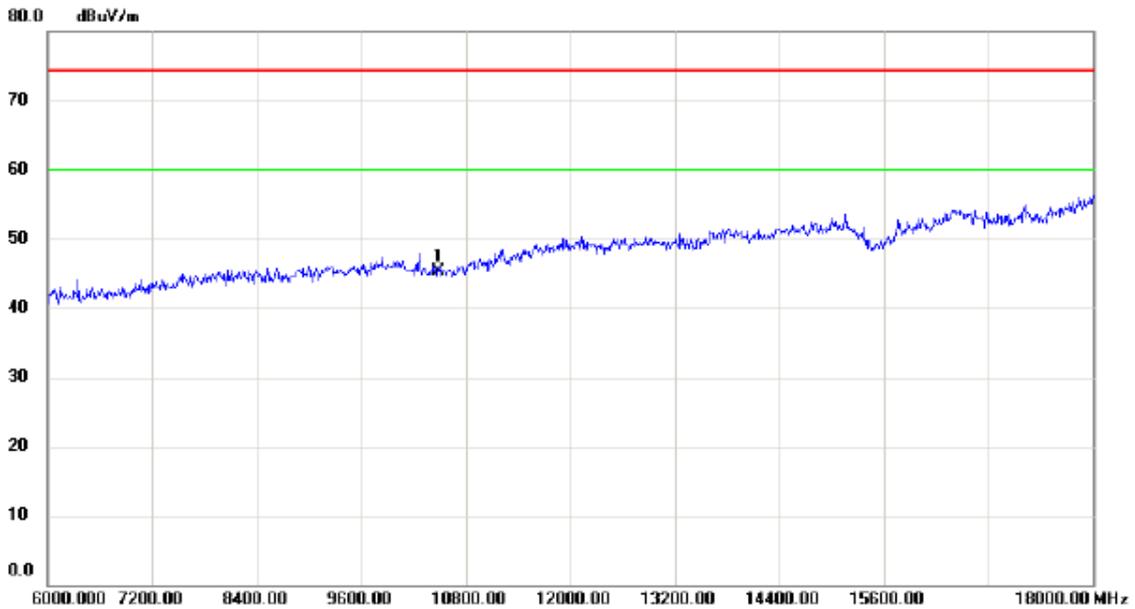


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10480.00	31.67	13.69	45.36	74.30	-28.94	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

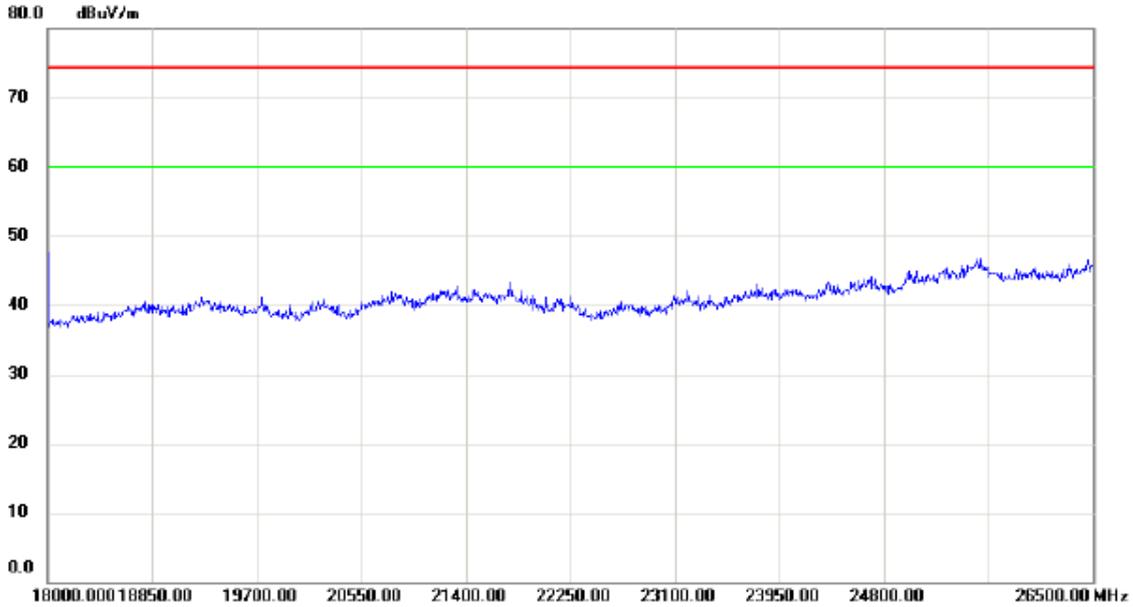


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

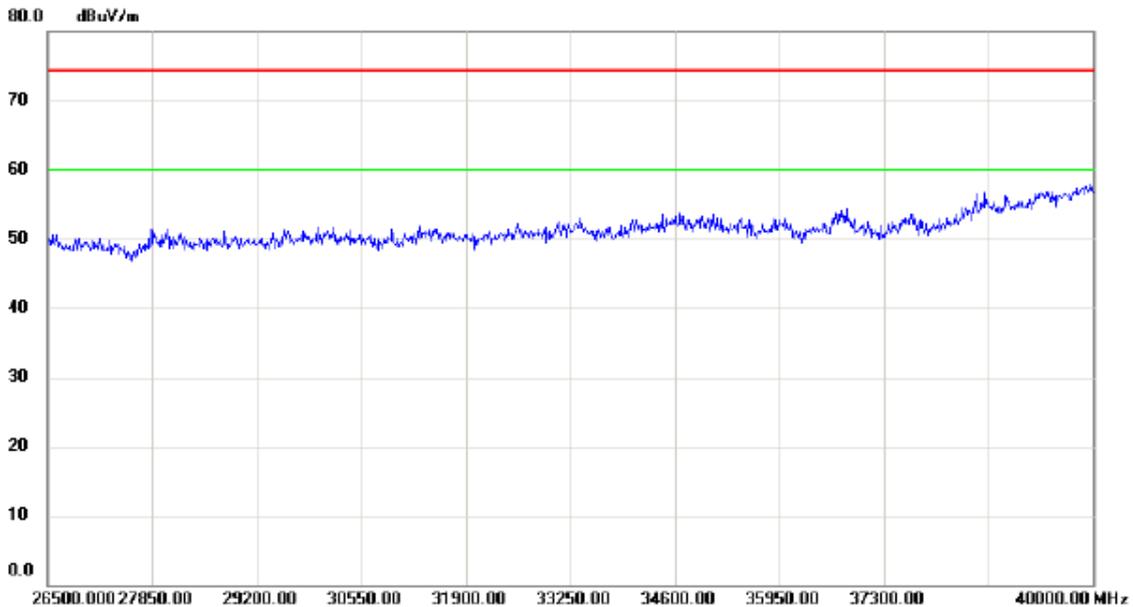

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Vertical

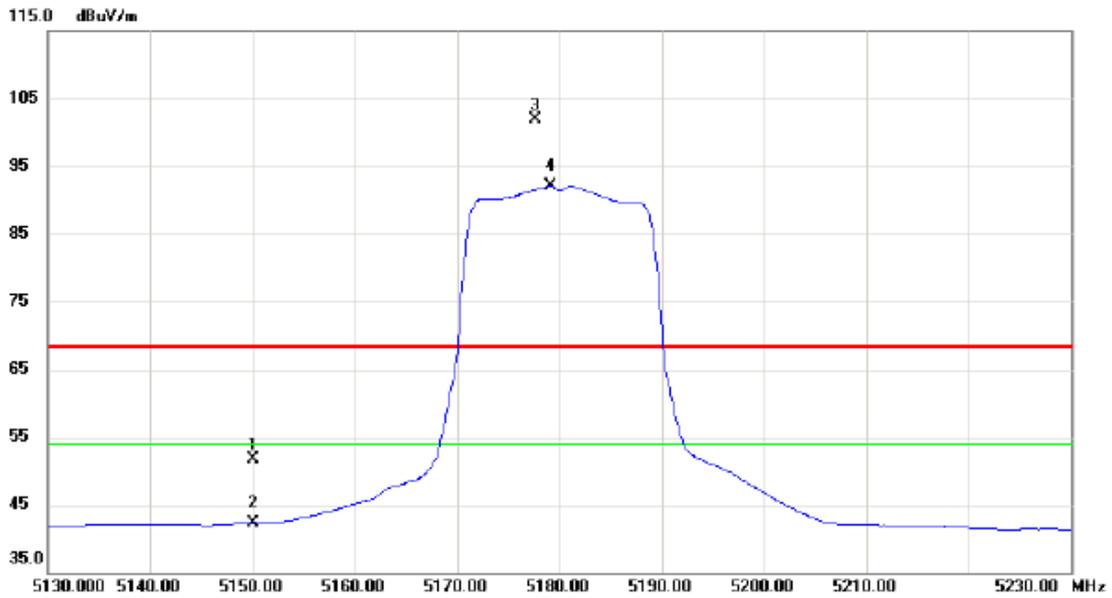


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	11.04	40.63	51.67	68.30	-16.63	peak	
2		5150.000	1.76	40.63	42.39	54.00	-11.61	AVG	
3	X	5177.700	61.09	40.72	101.81	68.30	33.51	peak	No Limit
4	*	5179.100	51.42	40.72	92.14	54.00	38.14	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

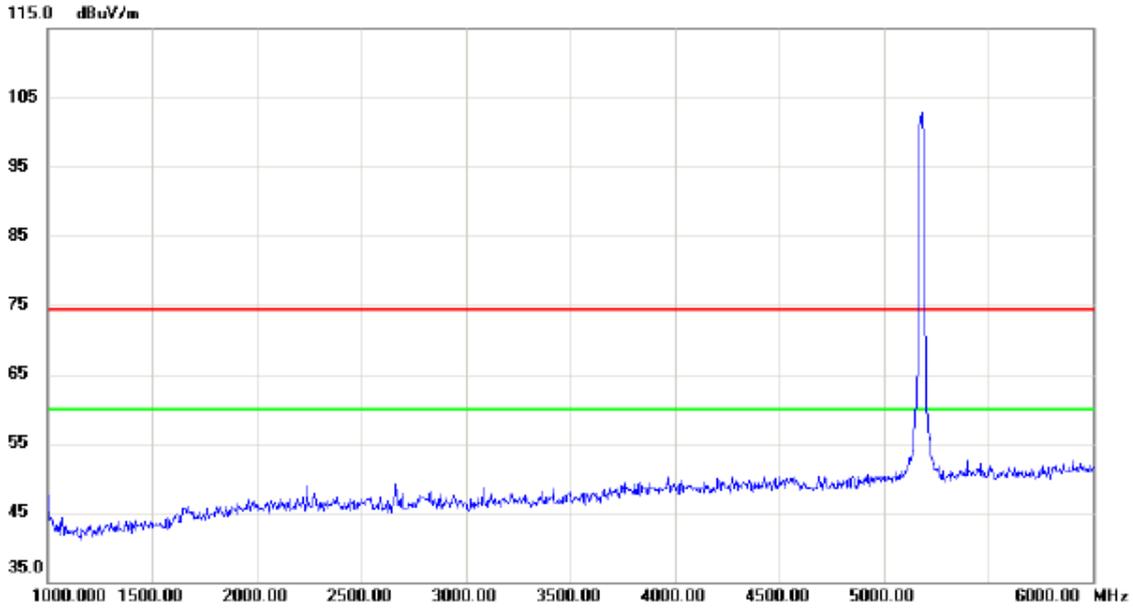


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

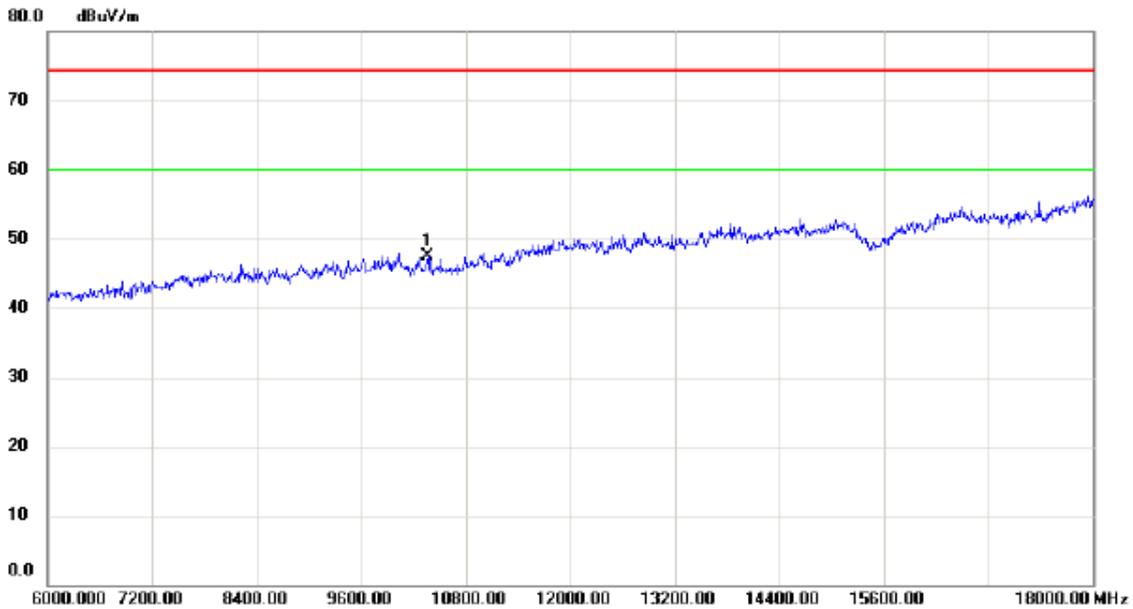


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10360.00	33.60	13.85	47.45	74.30	-26.85	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

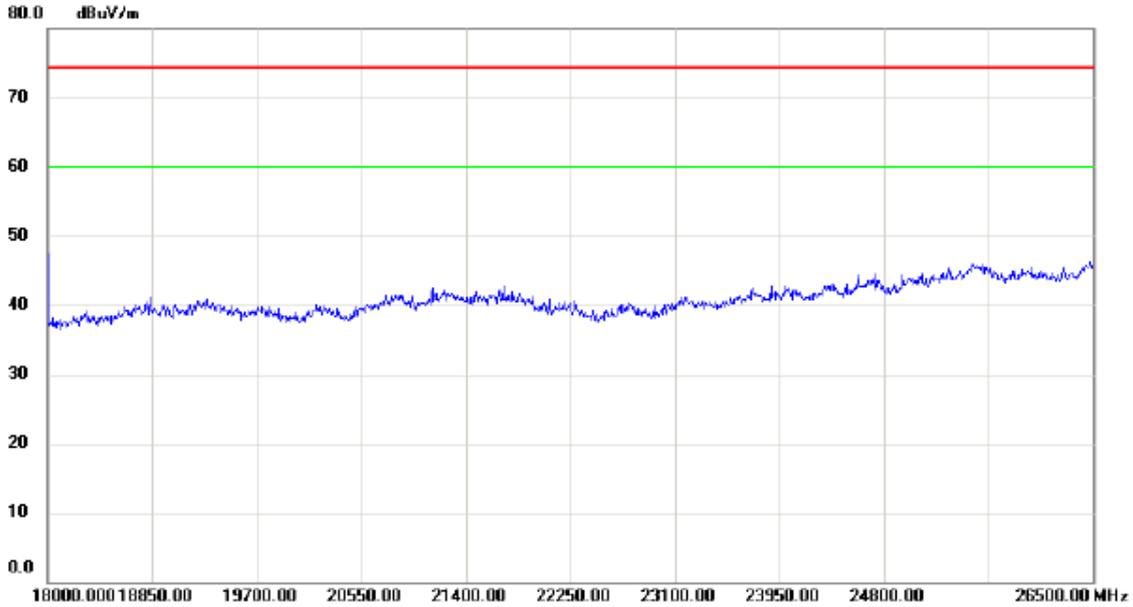


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

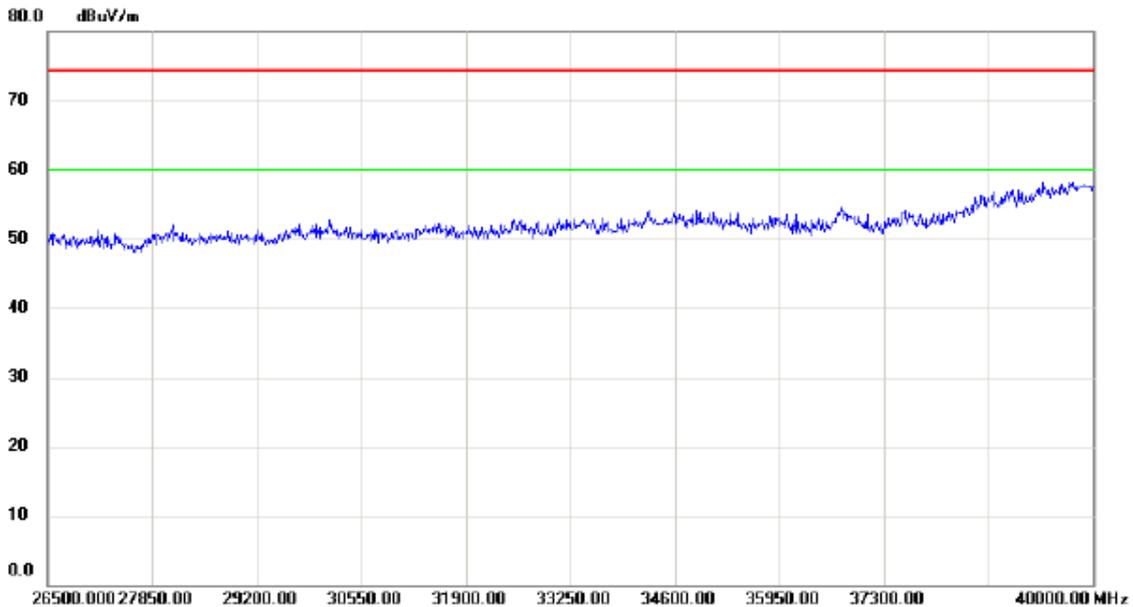

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Horizontal

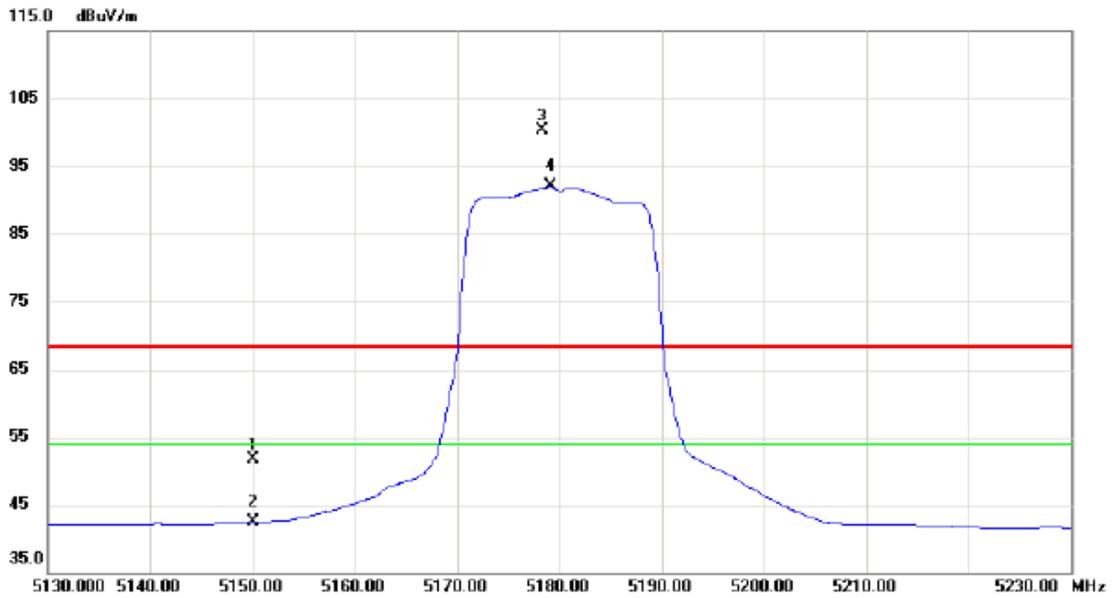


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	11.17	40.63	51.80	68.30	-16.50	peak	
2		5150.000	1.90	40.63	42.53	54.00	-11.47	AVG	
3	X	5178.300	59.57	40.72	100.29	68.30	31.99	peak	No Limit
4	*	5179.100	51.31	40.72	92.03	54.00	38.03	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

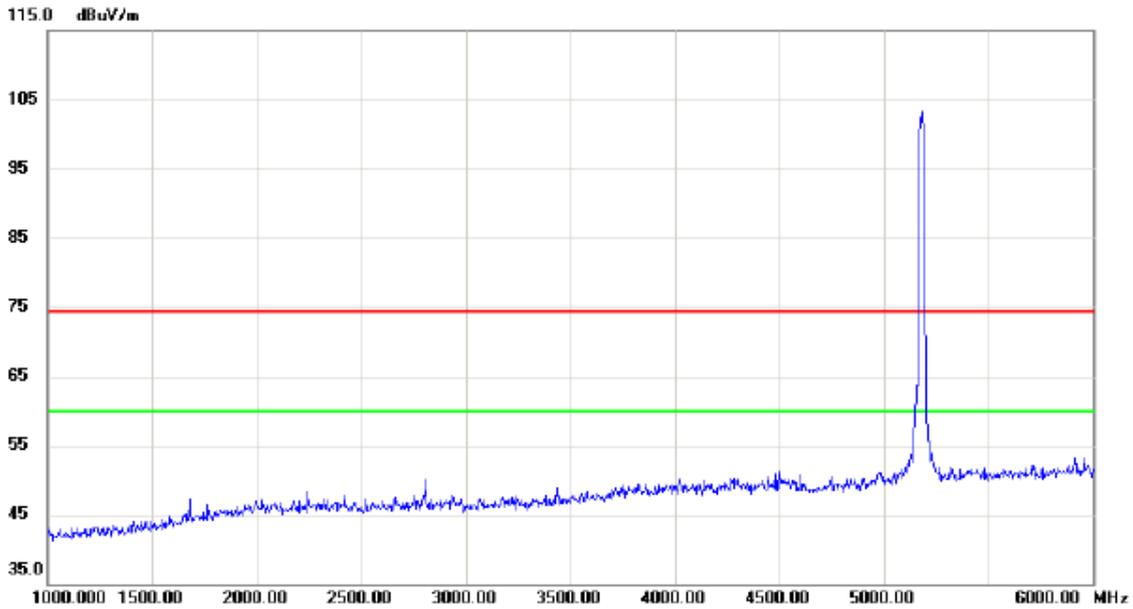


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

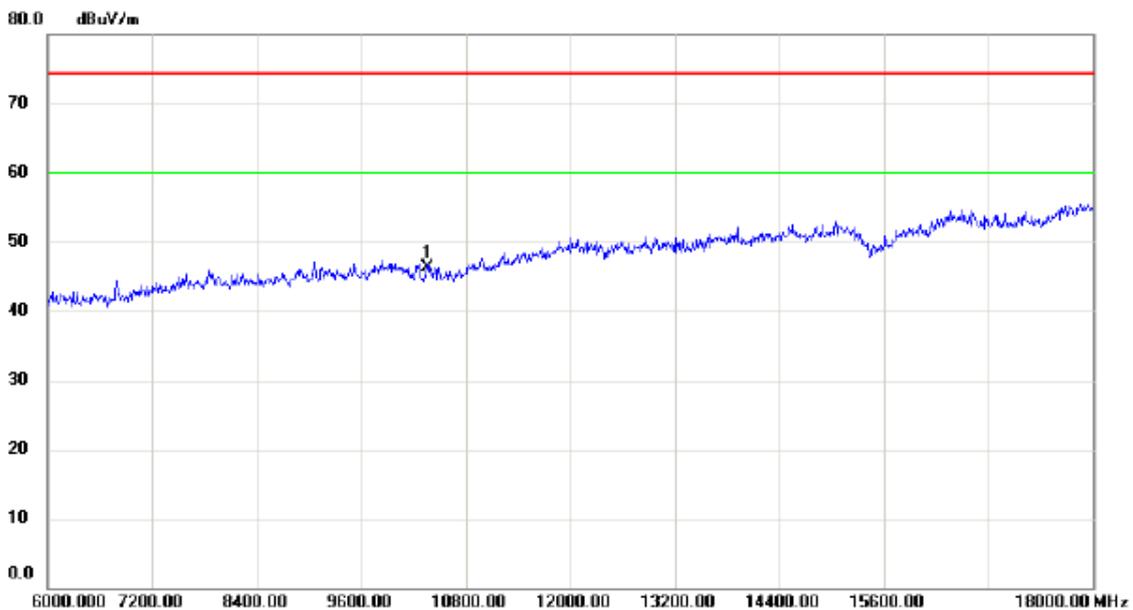


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	32.52	13.85	46.37	74.30	-27.93	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

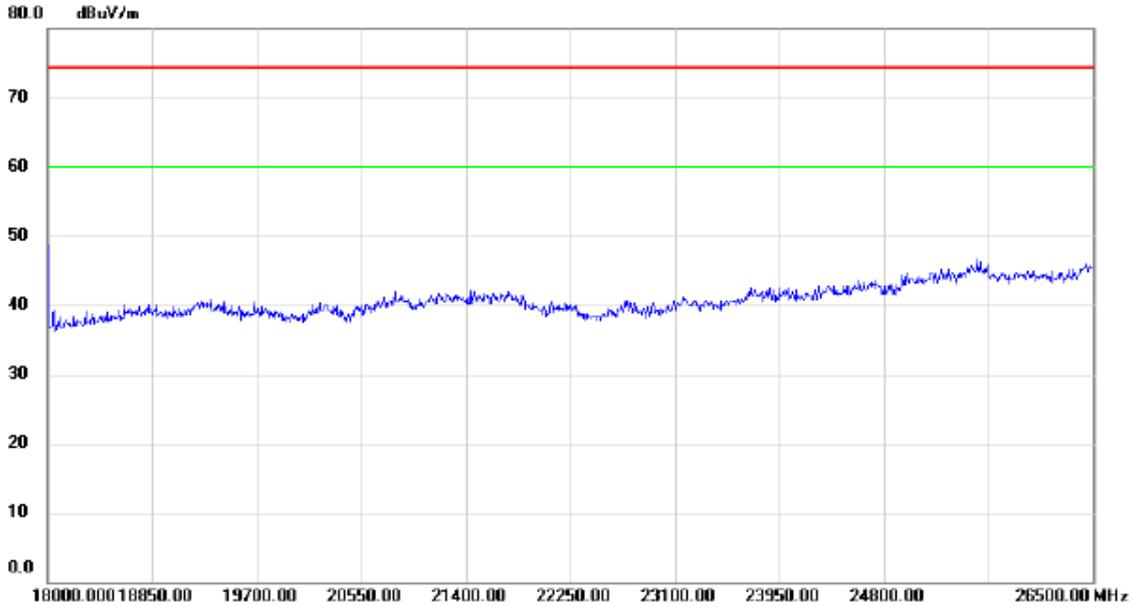


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

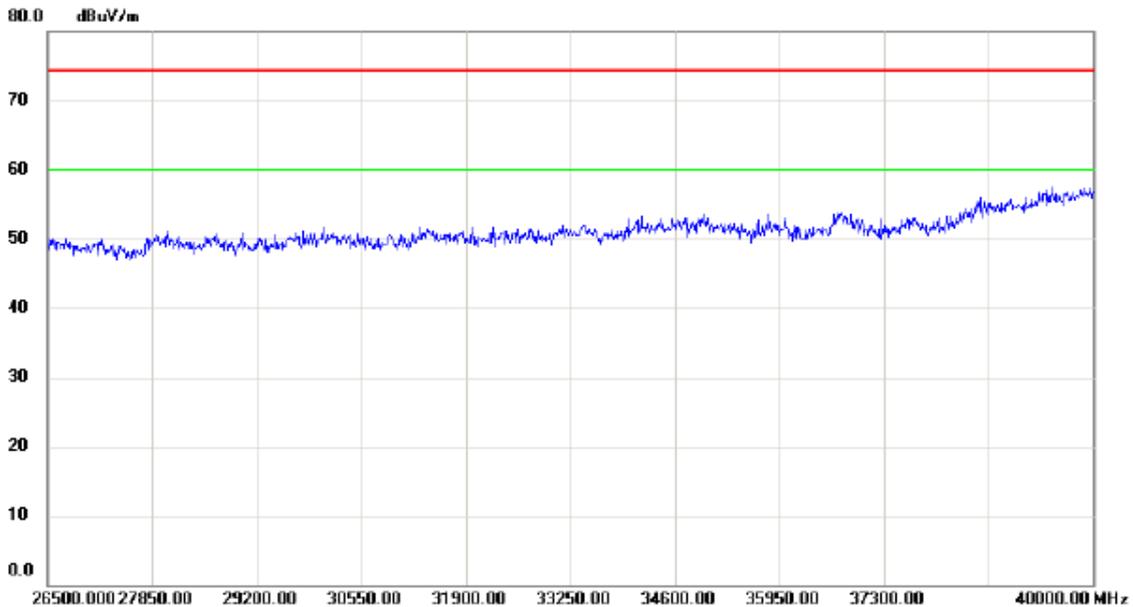

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Vertical

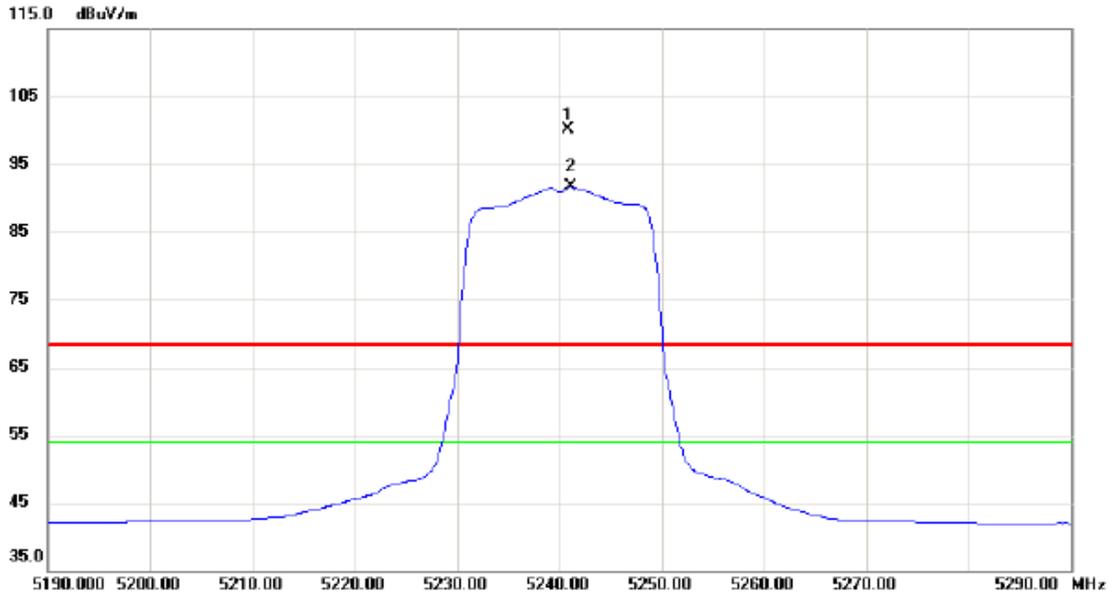


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5240.900	59.27	40.93	100.20	68.30	31.90	peak	No Limit
2	*	5241.100	50.69	40.93	91.62	54.00	37.62	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

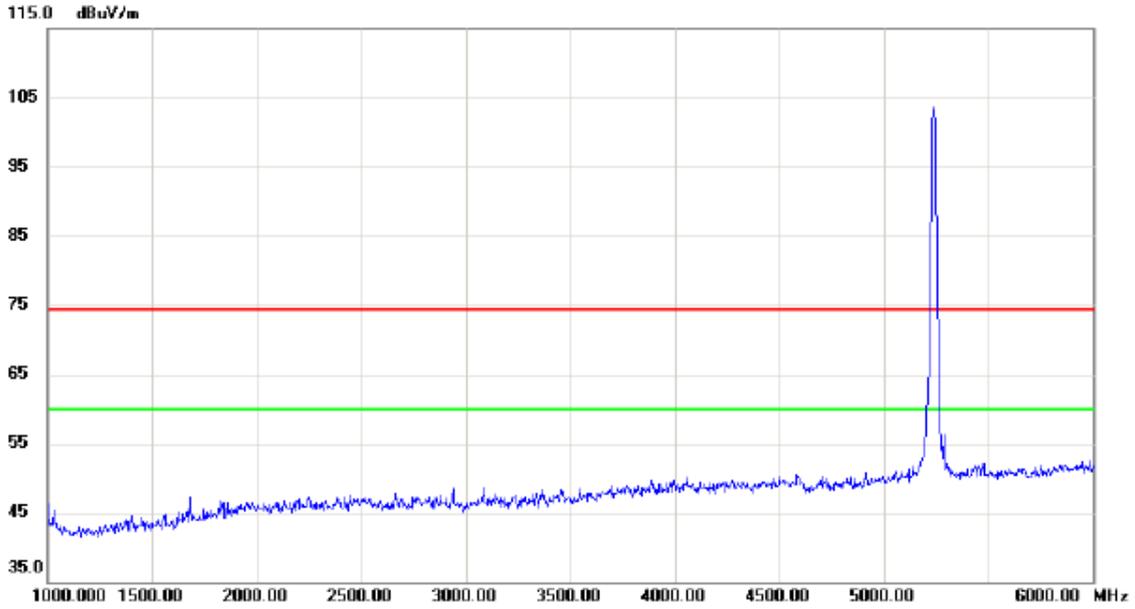


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

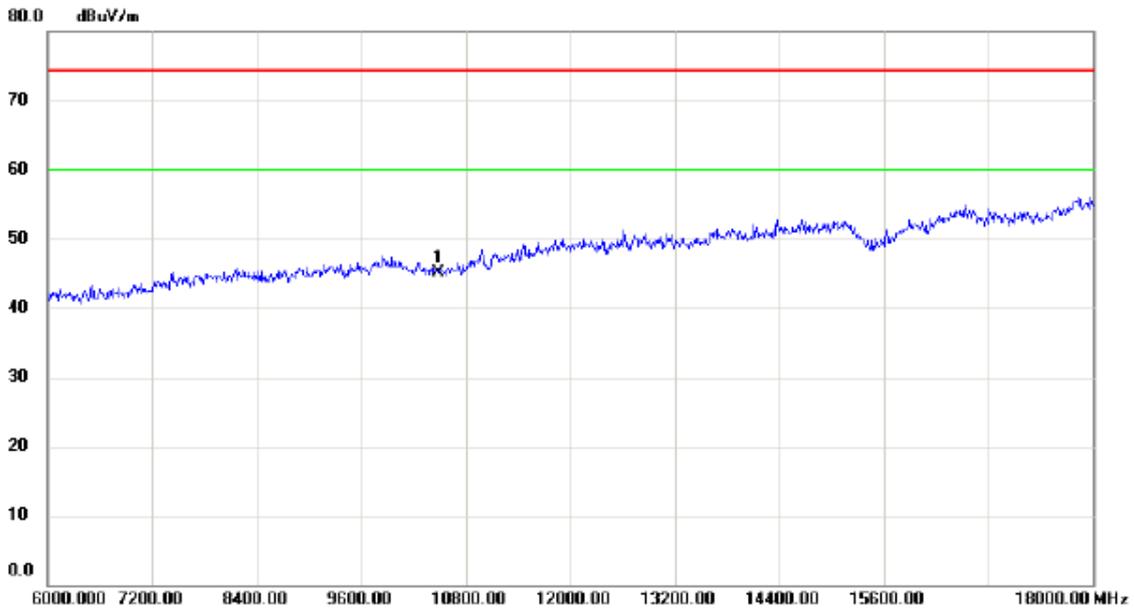


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	31.47	13.69	45.16	74.30	-29.14	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

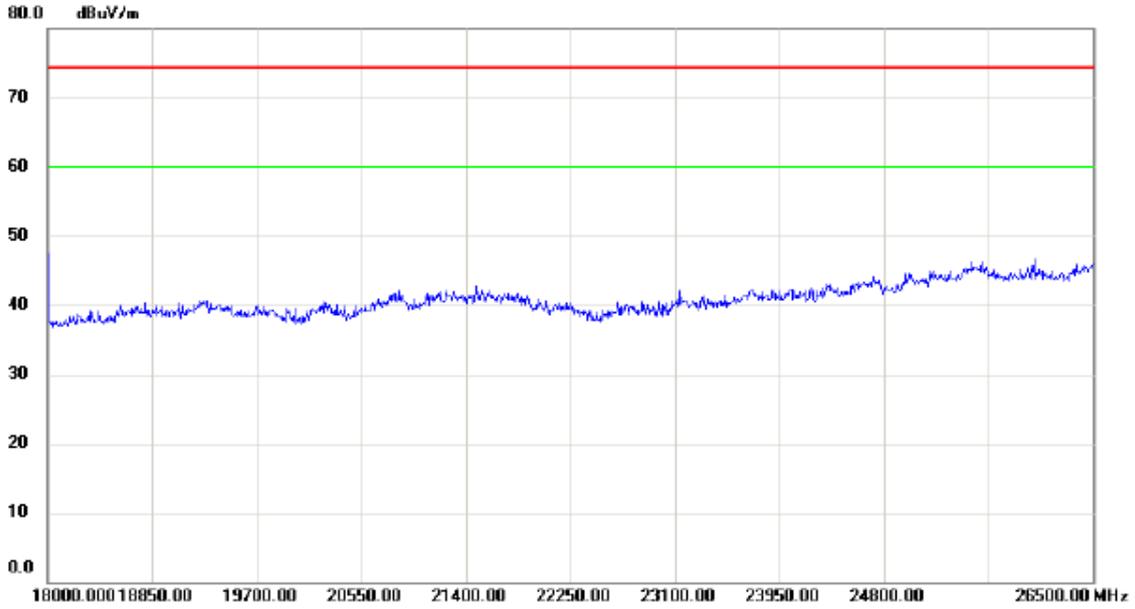


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

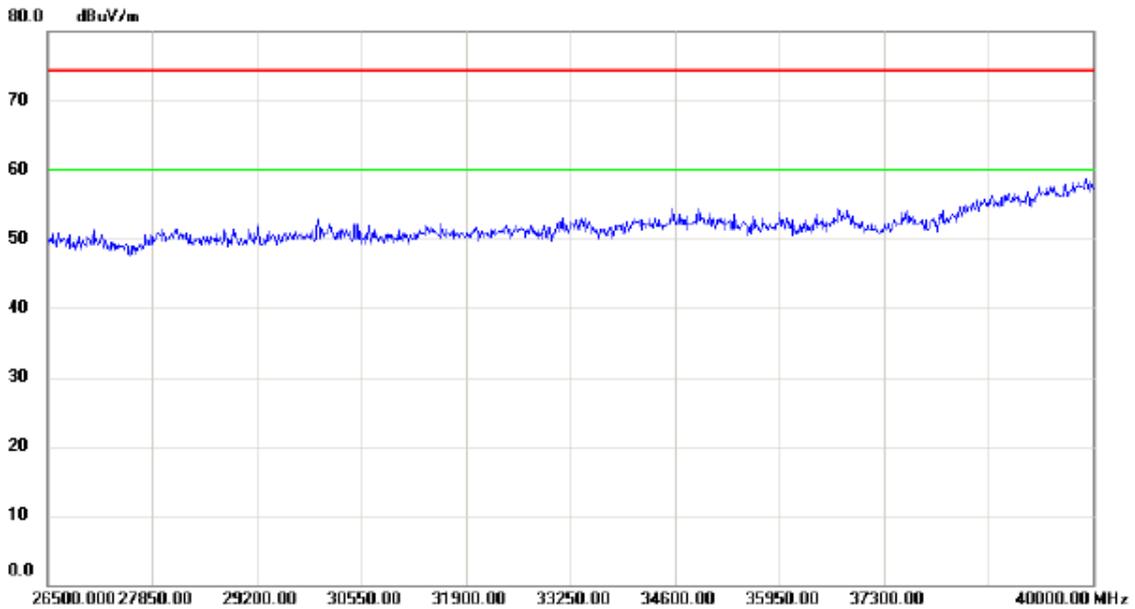

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

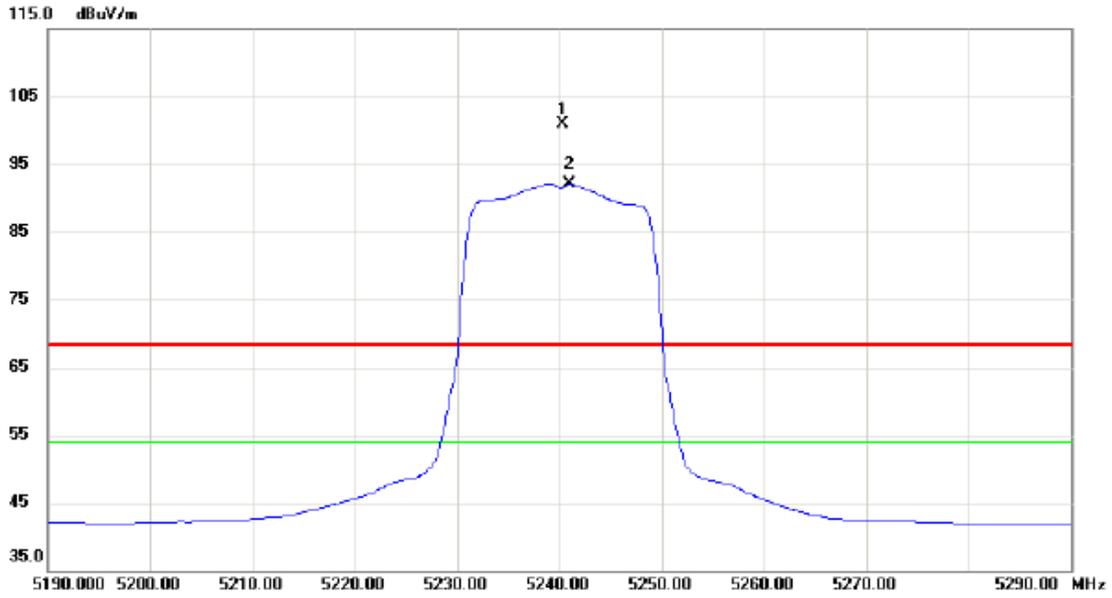


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5240.300	60.02	40.93	100.95	68.30	32.65	peak	No Limit
2	*	5241.000	51.19	40.93	92.12	54.00	38.12	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

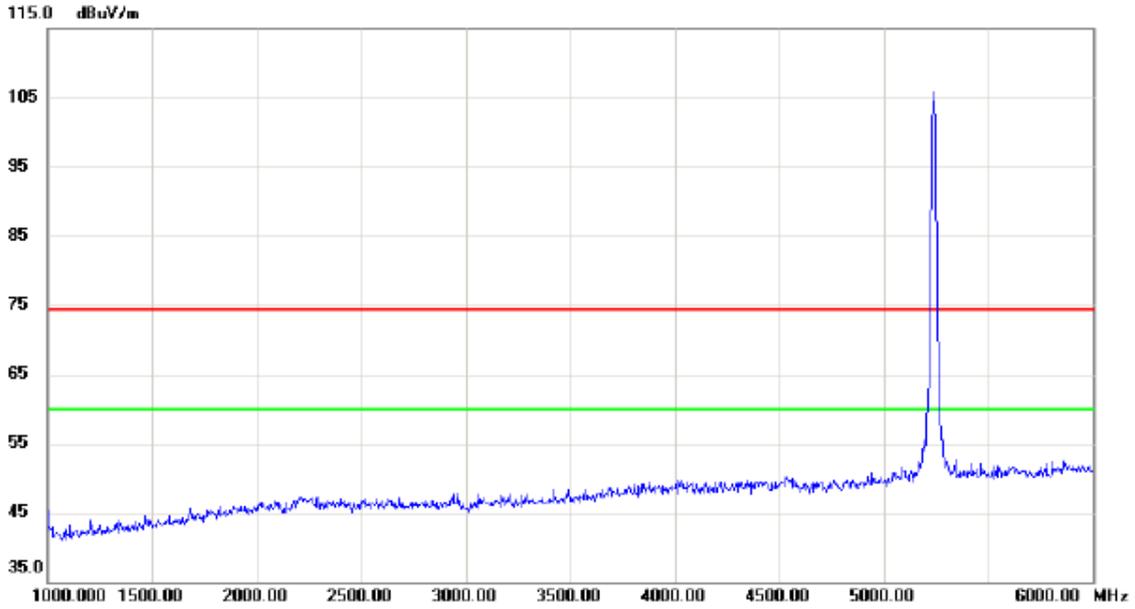


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

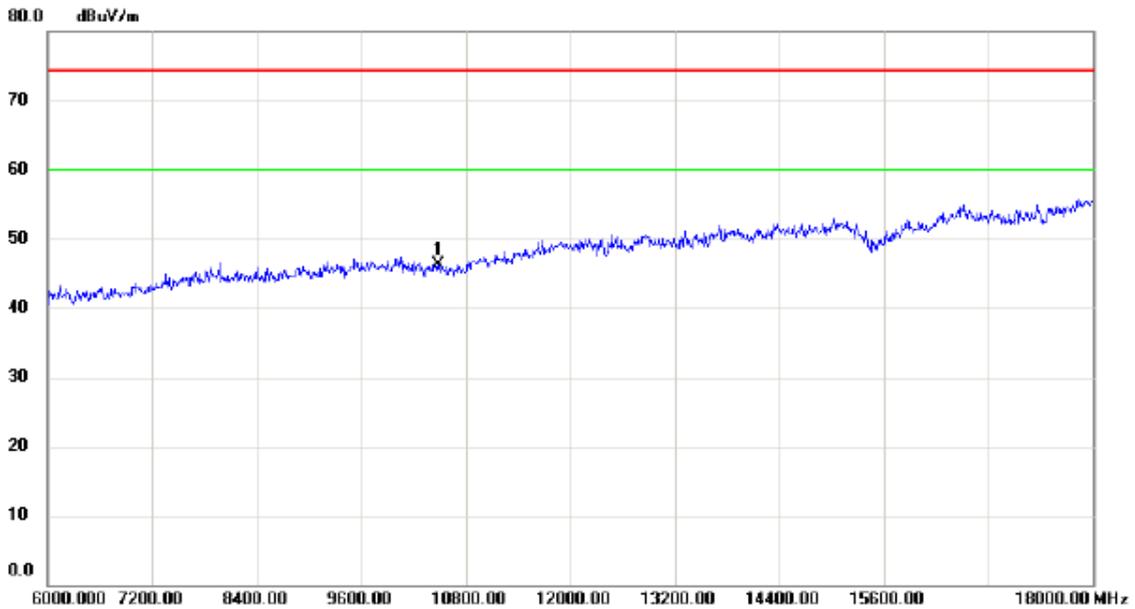


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10480.00	32.57	13.69	46.26	74.30	-28.04	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

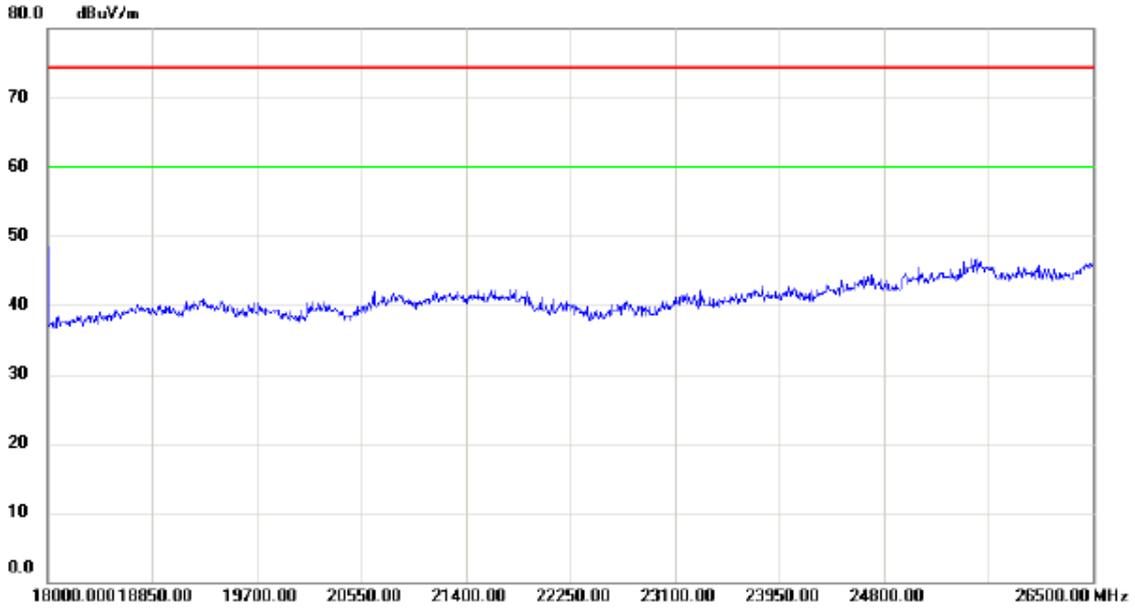


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

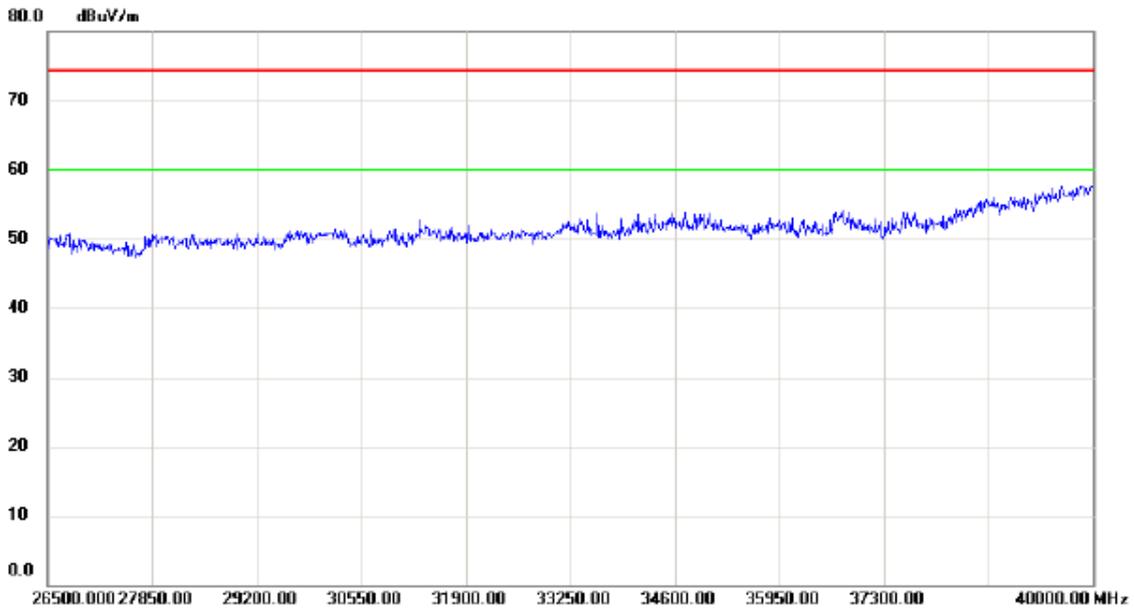

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

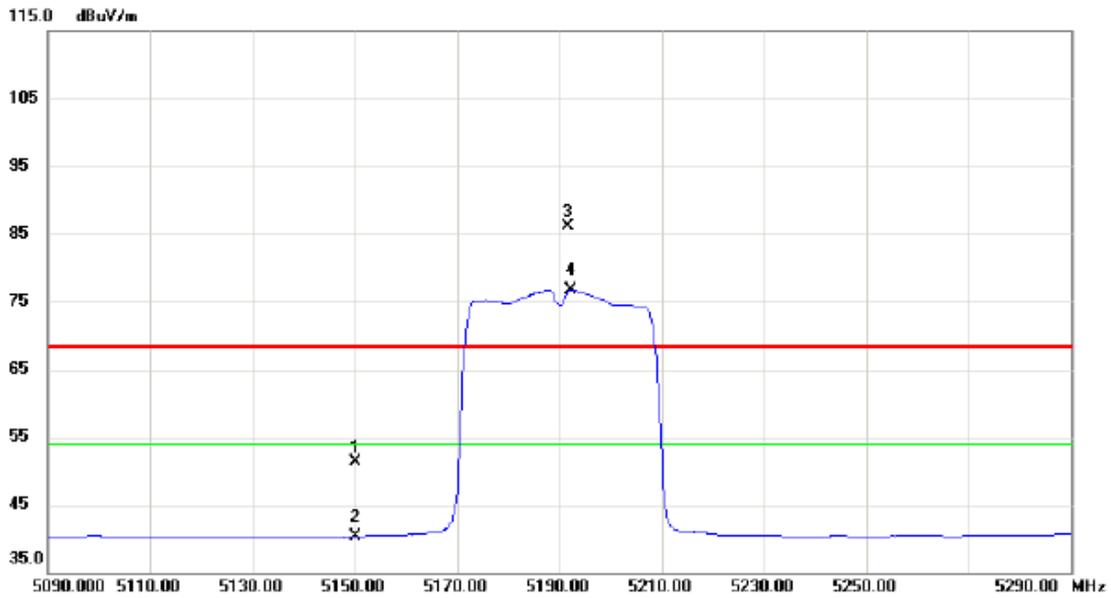


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	10.59	40.63	51.22	68.30	-17.08	peak	
2		5150.000	-0.31	40.63	40.32	54.00	-13.68	AVG	
3	X	5191.600	45.26	40.76	86.02	68.30	17.72	peak	No Limit
4	*	5192.200	36.03	40.76	76.79	54.00	22.79	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

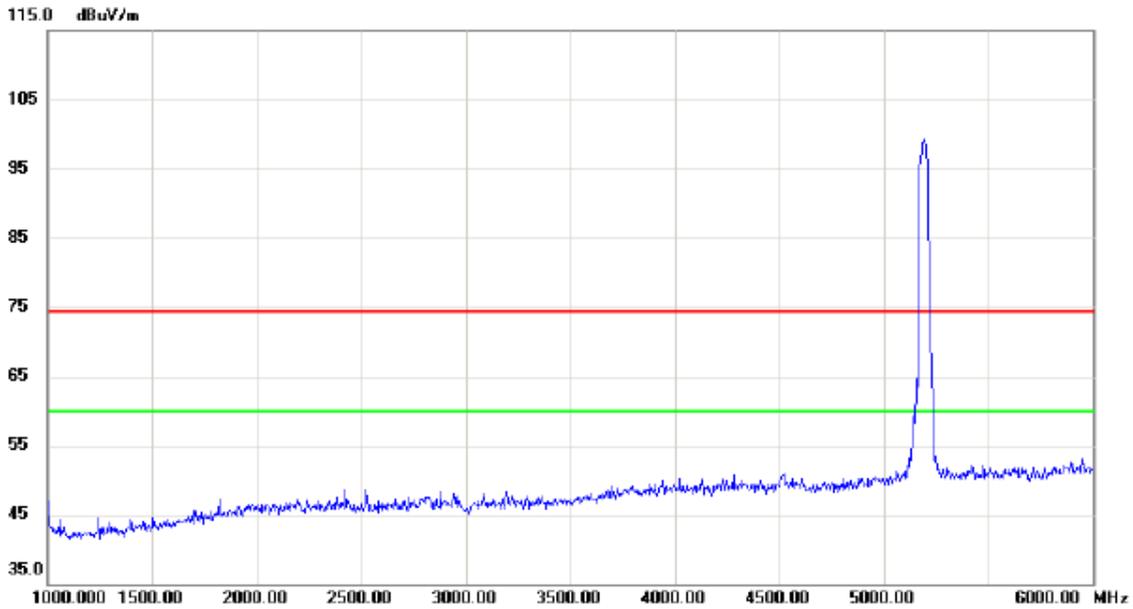


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

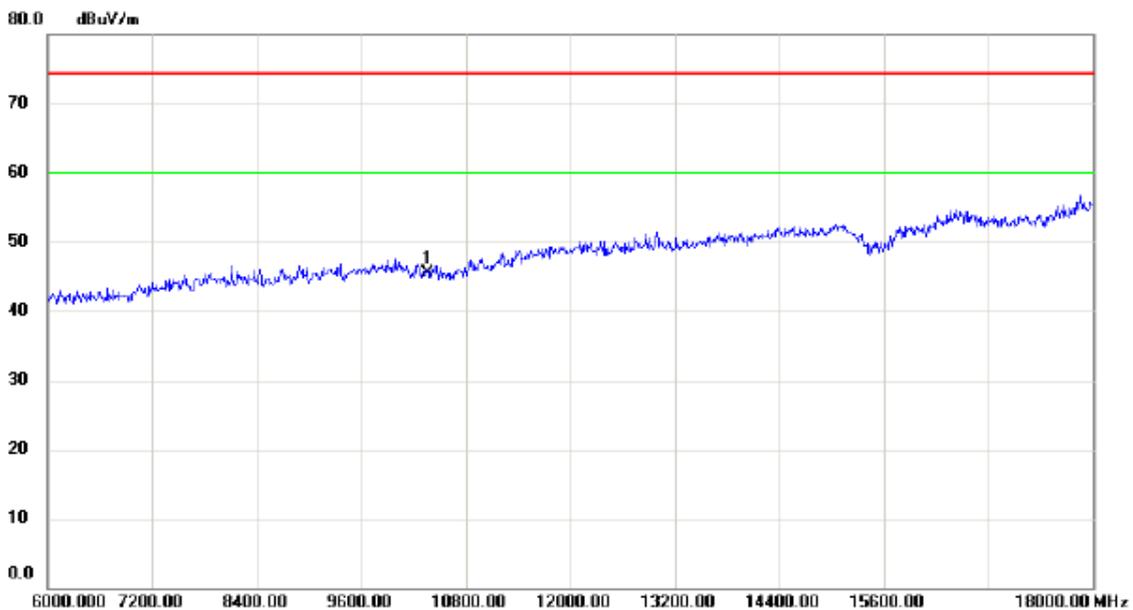


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10360.00	31.74	13.85	45.59	74.30	-28.71	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

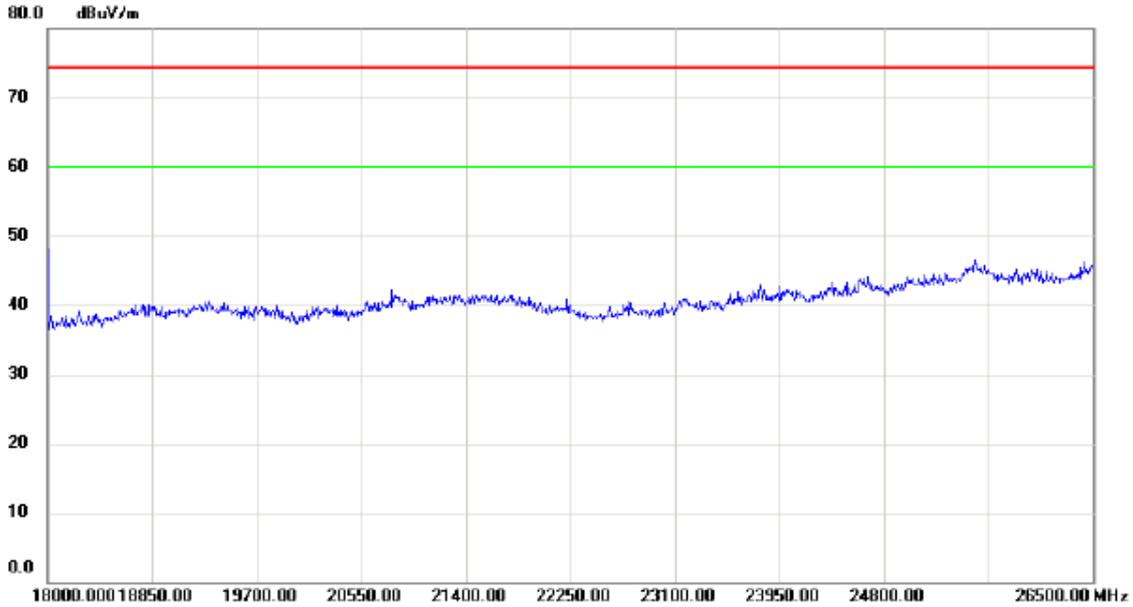


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

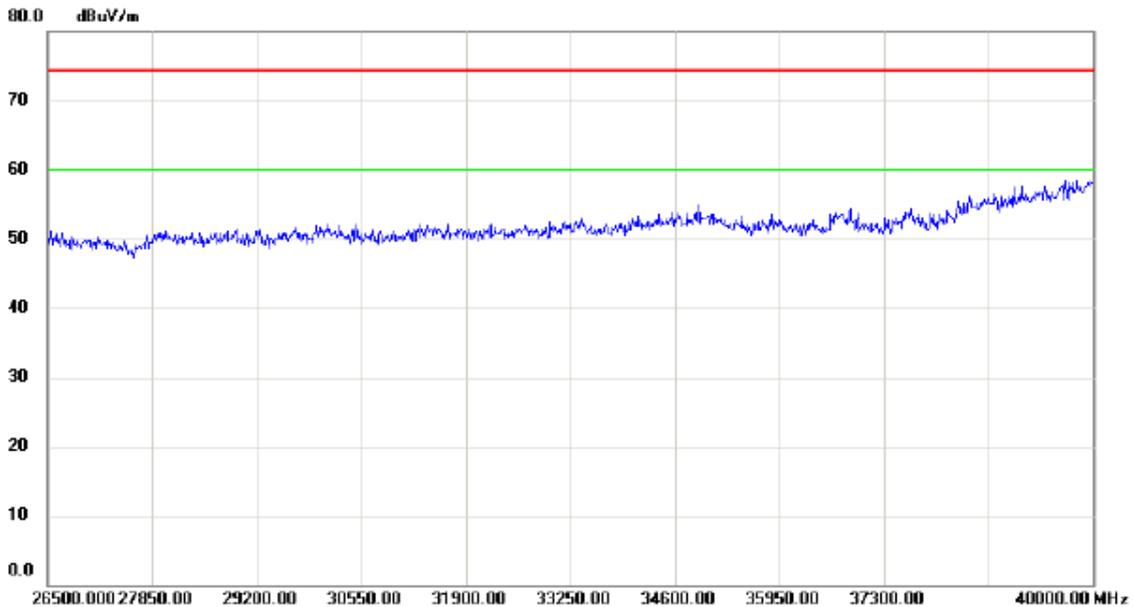

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

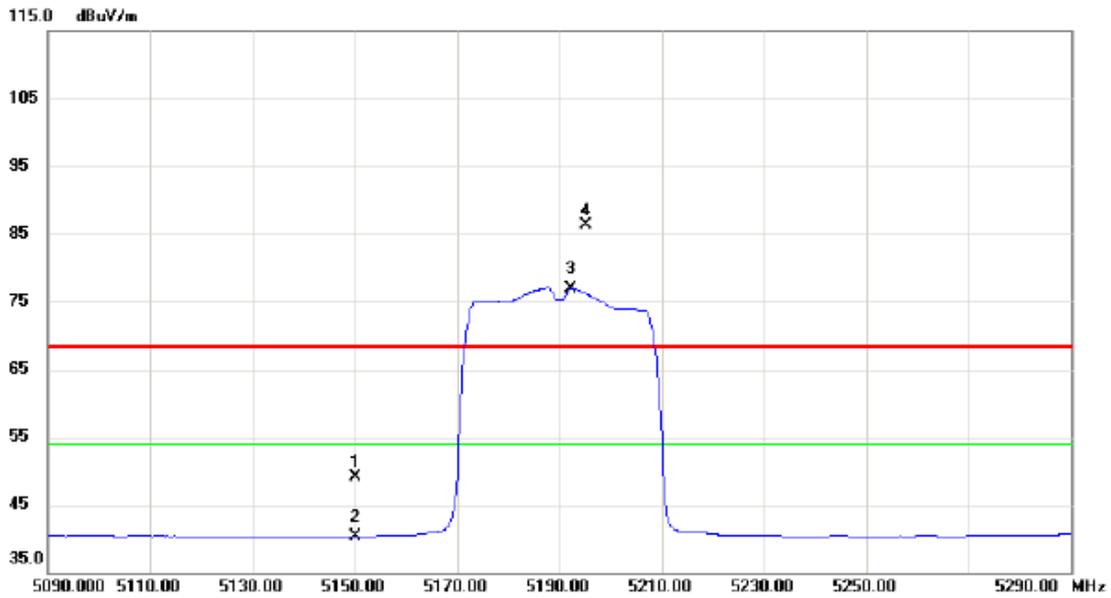


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	8.52	40.63	49.15	68.30	-19.15	peak	
2		5150.000	-0.29	40.63	40.34	54.00	-13.66	AVG	
3	*	5192.400	36.24	40.76	77.00	54.00	23.00	AVG	No Limit
4	X	5195.200	45.43	40.78	86.21	68.30	17.91	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

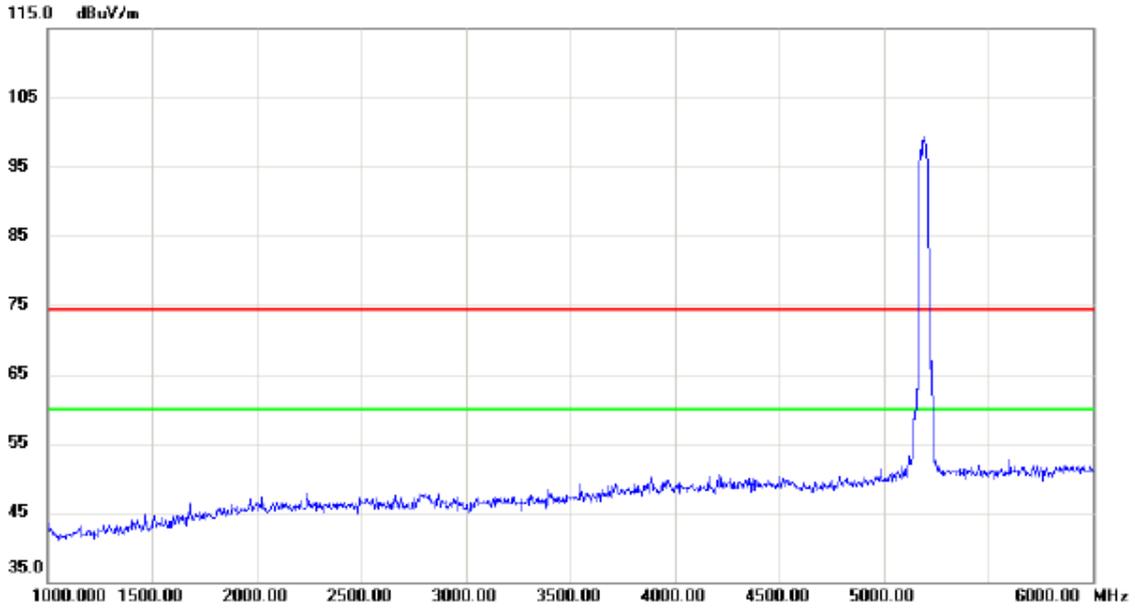


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

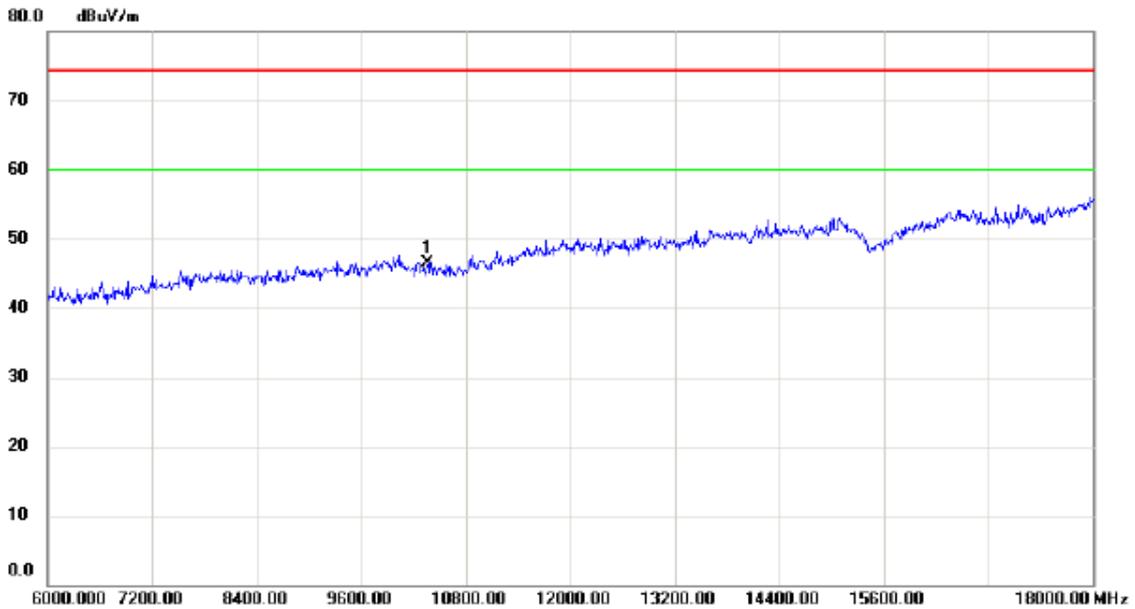


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10360.00	32.62	13.85	46.47	74.30	-27.83	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

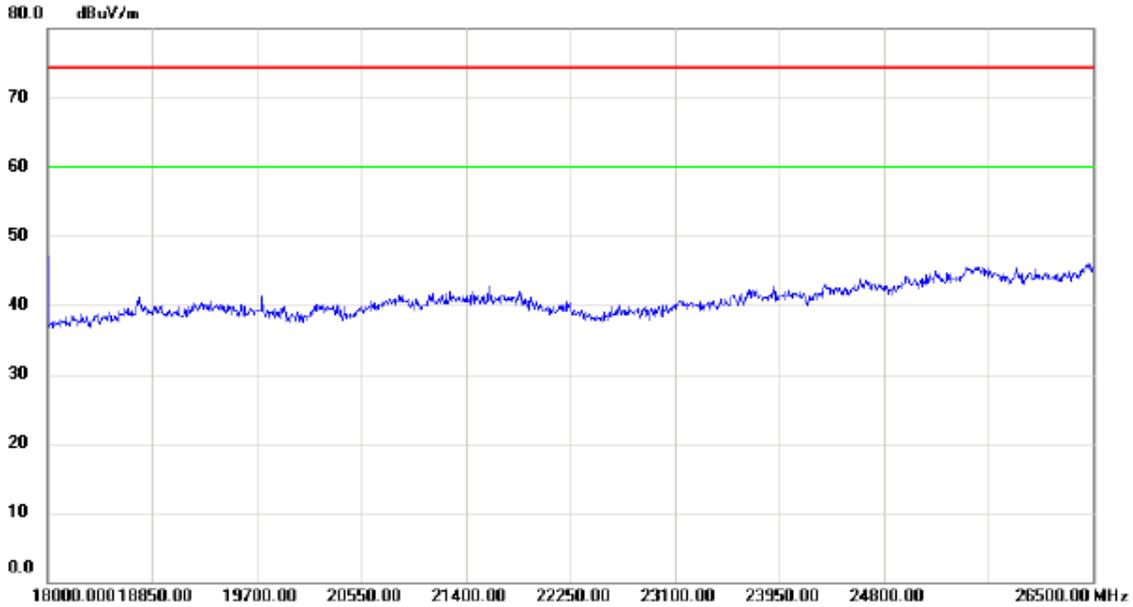


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

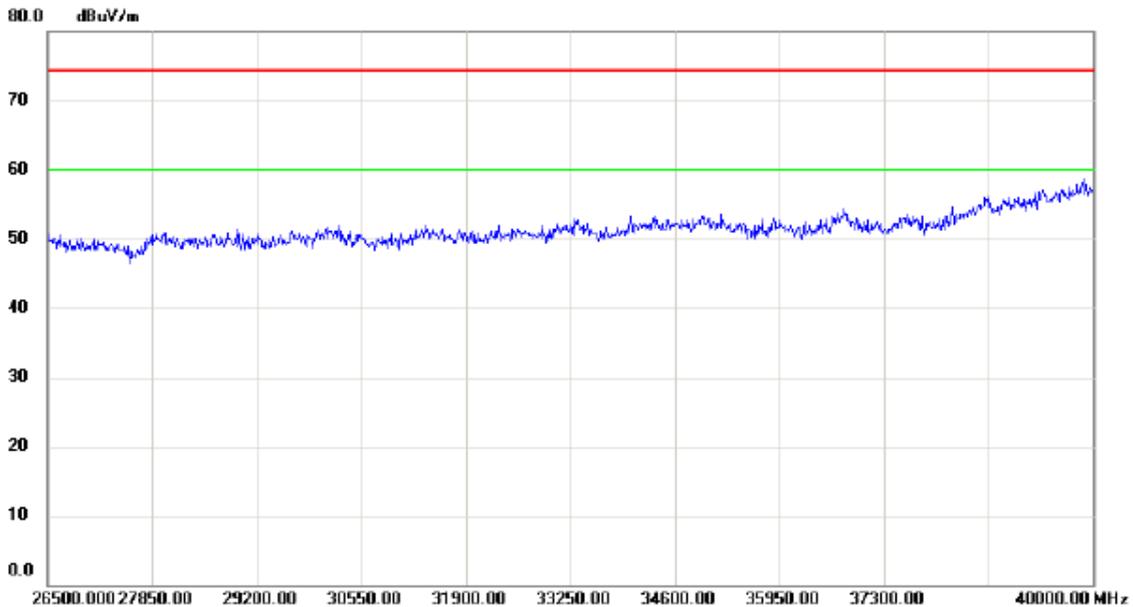

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

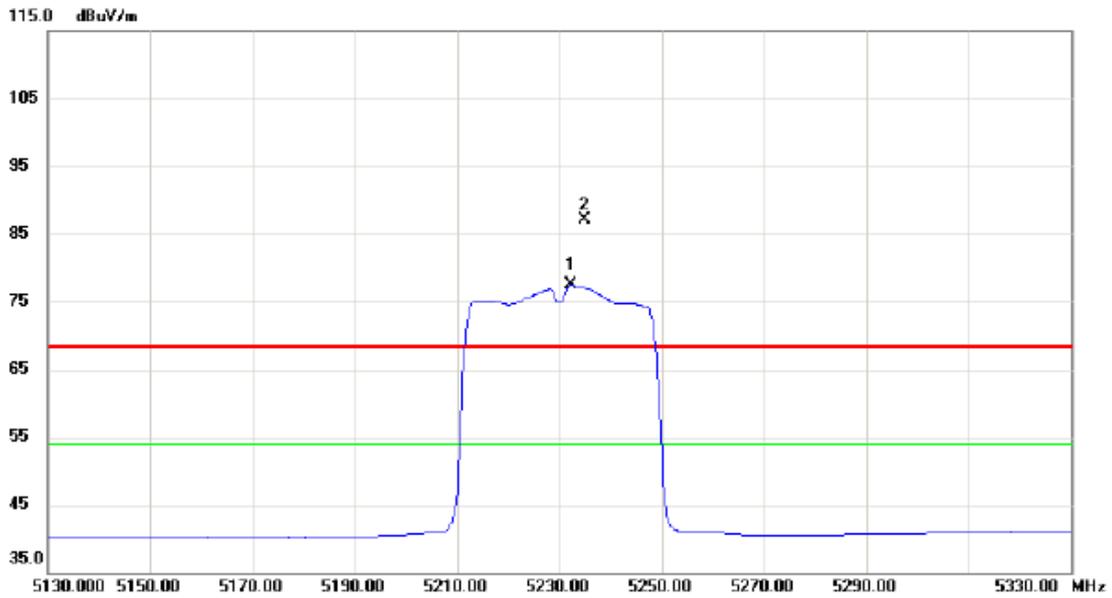


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5232.400	36.51	40.90	77.41	54.00	23.41	AVG	No Limit
2	X	5235.000	46.20	40.90	87.10	68.30	18.80	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

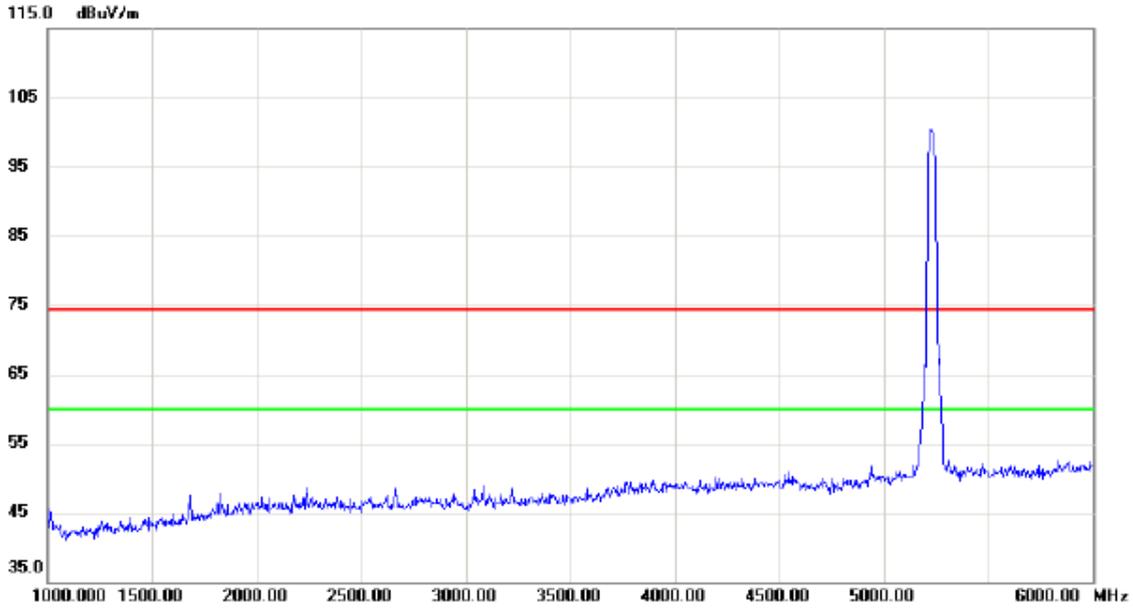


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

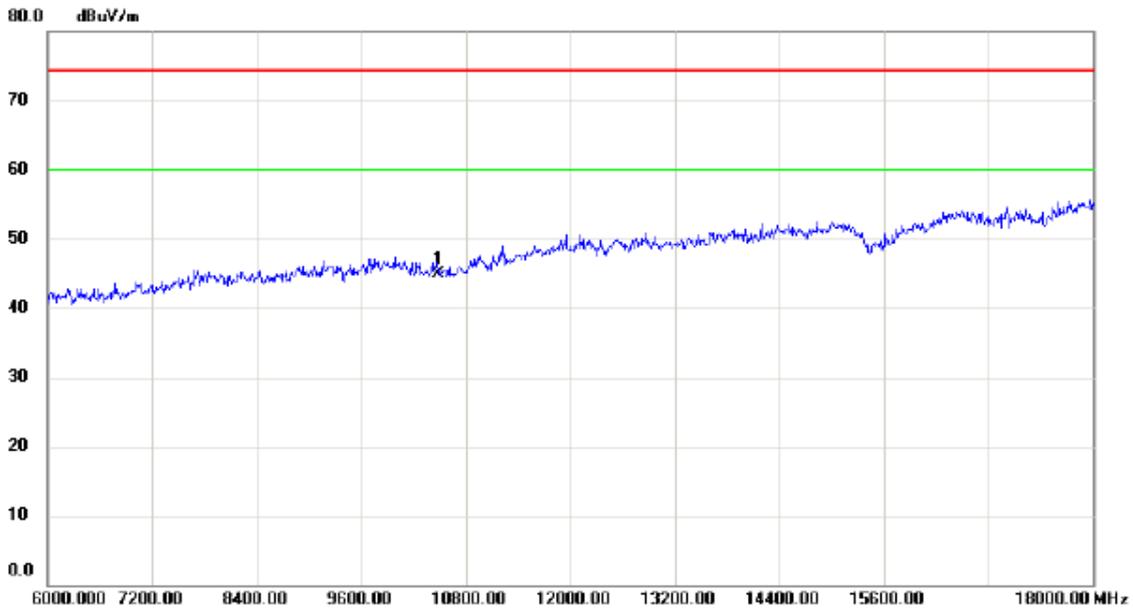


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10480.00	31.19	13.69	44.88	74.30	-29.42	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

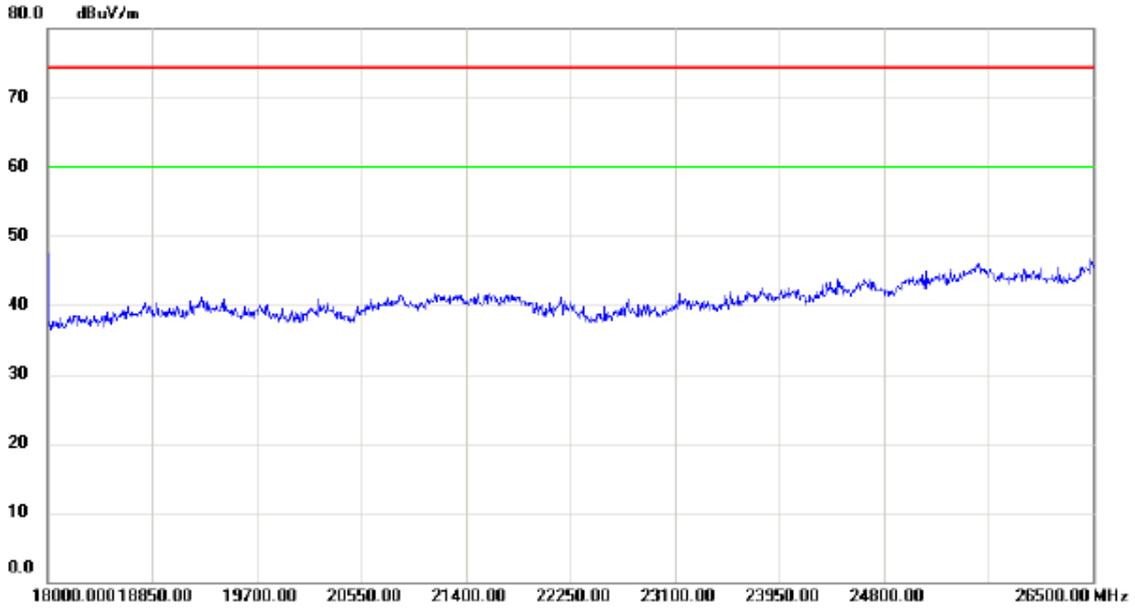


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

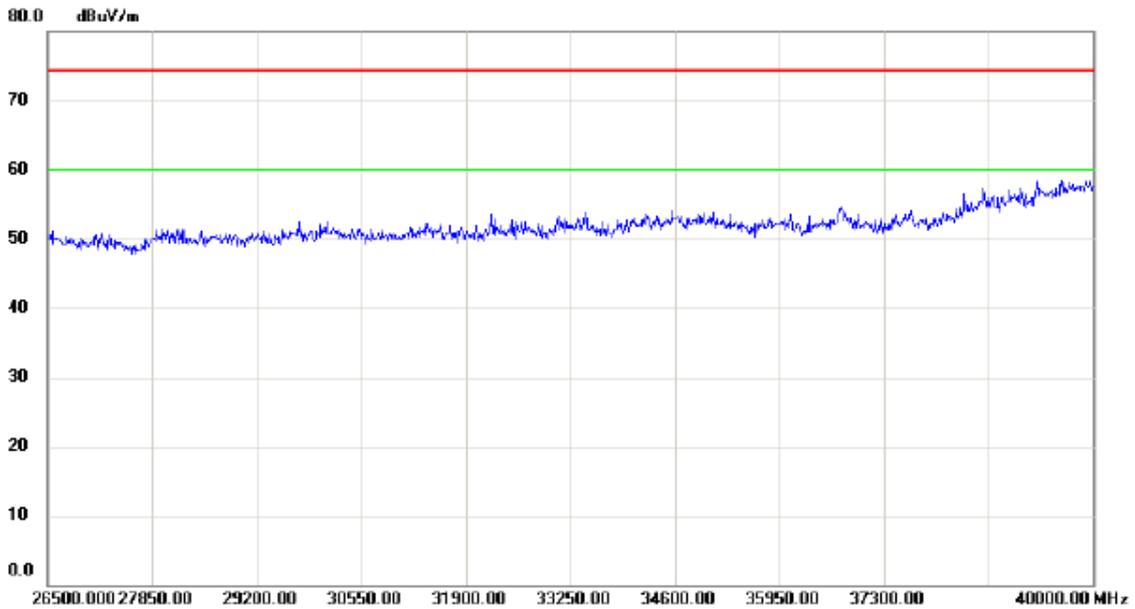

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

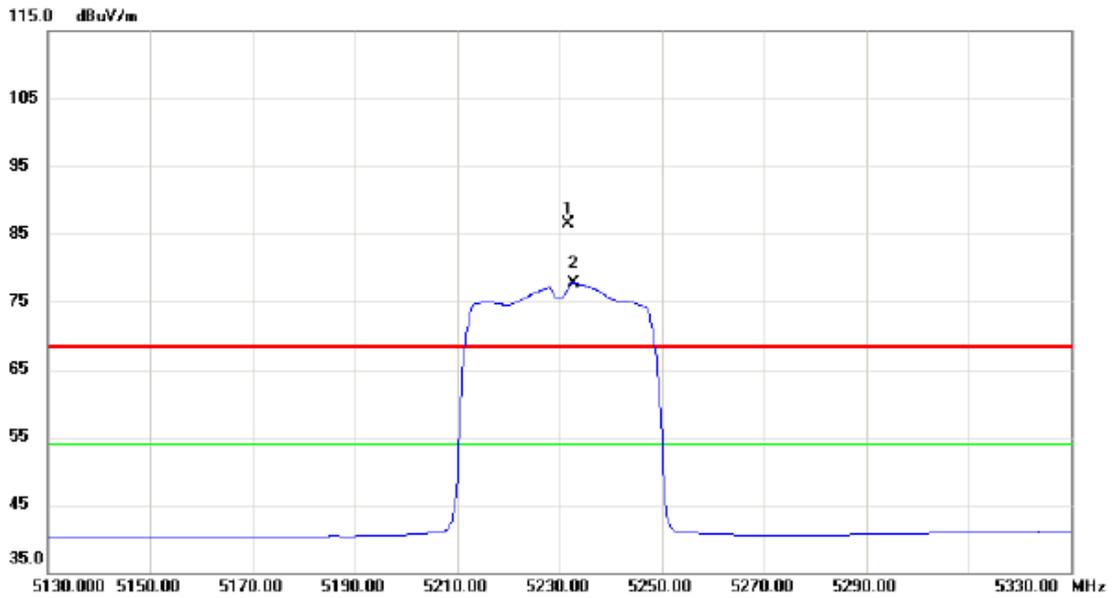


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5231.800	45.62	40.90	86.52	68.30	18.22	peak	No Limit
2	*	5232.800	36.75	40.90	77.65	54.00	23.65	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

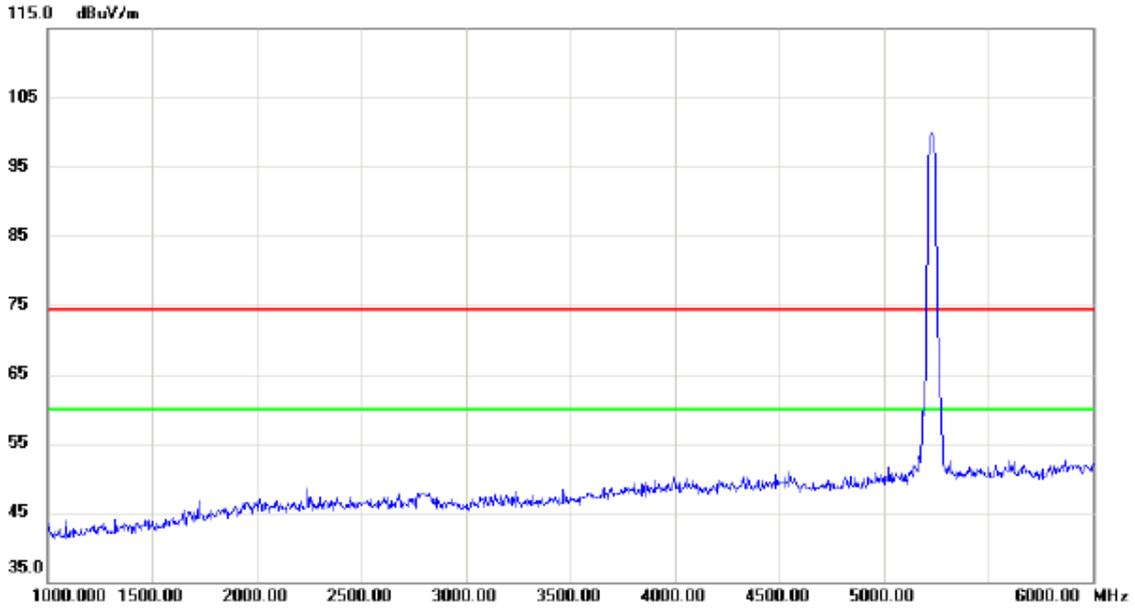


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

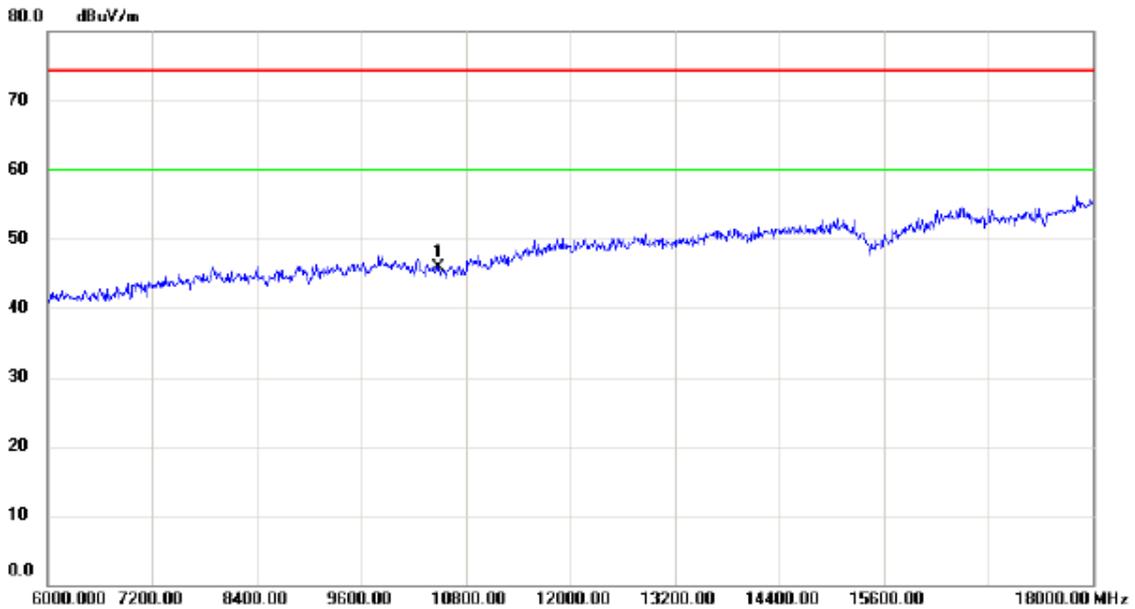


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10480.00	32.14	13.69	45.83	74.30	-28.47	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

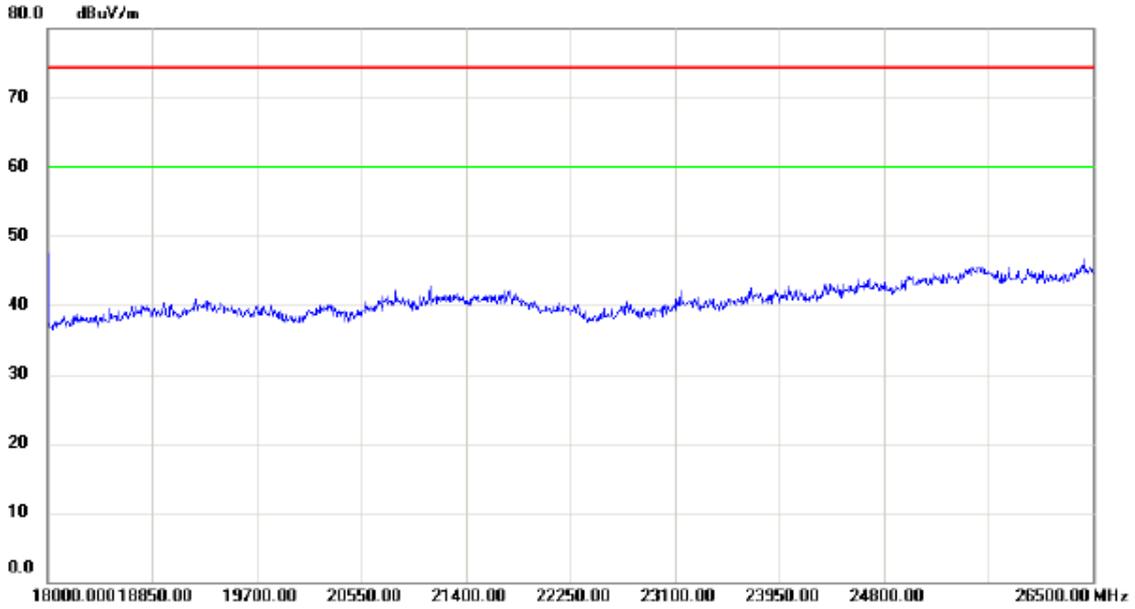


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

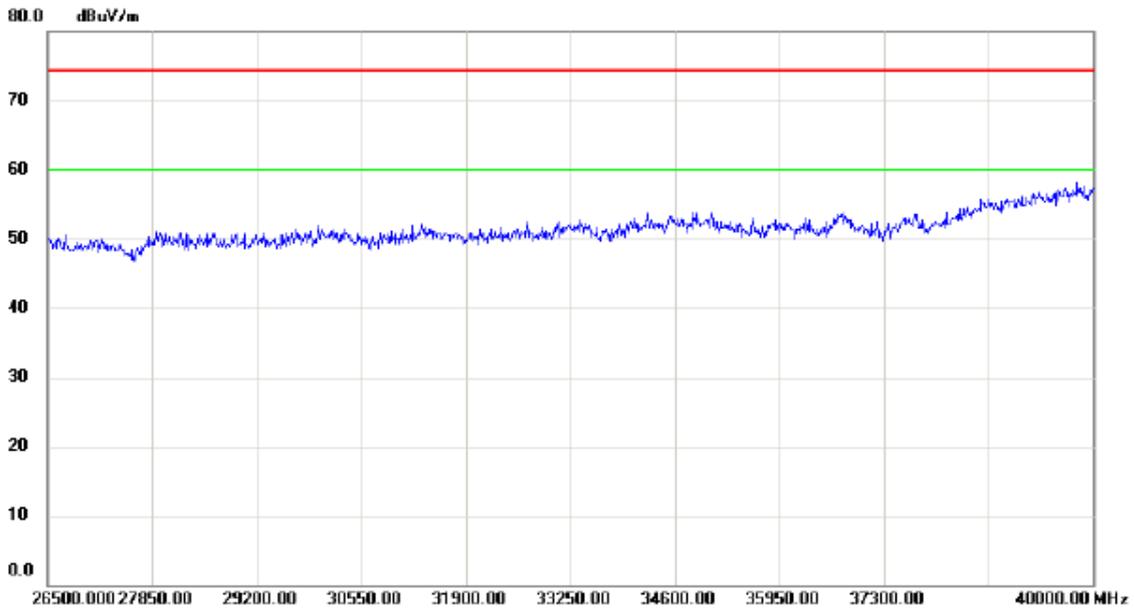

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Vertical

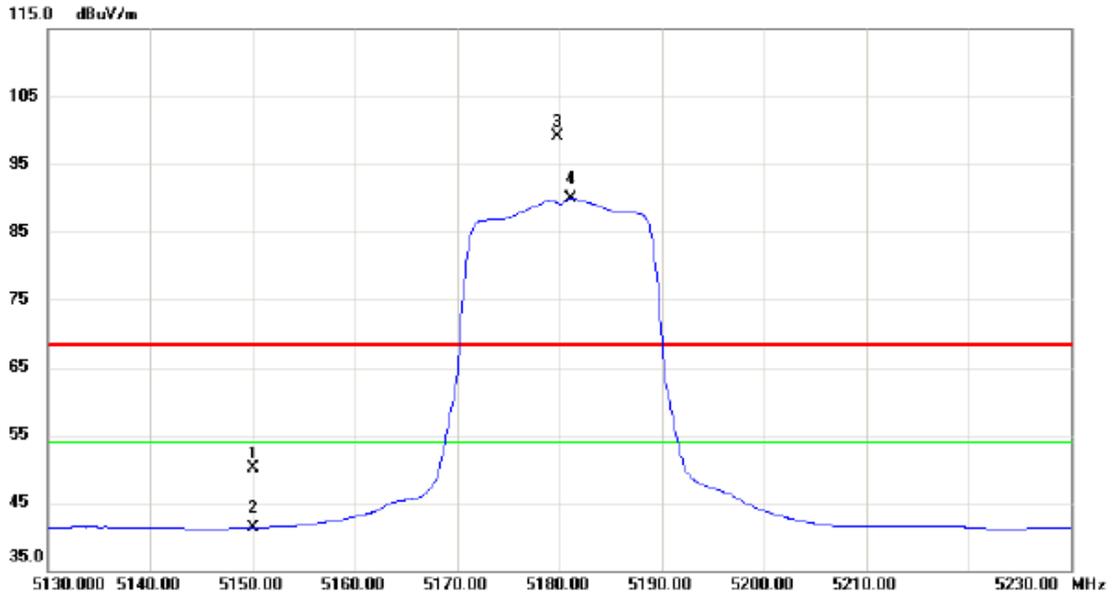


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	9.44	40.63	50.07	68.30	-18.23	peak	
2		5150.000	0.71	40.63	41.34	54.00	-12.66	AVG	
3	X	5179.800	58.39	40.72	99.11	68.30	30.81	peak	No Limit
4	*	5181.100	49.25	40.72	89.97	54.00	35.97	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Vertical

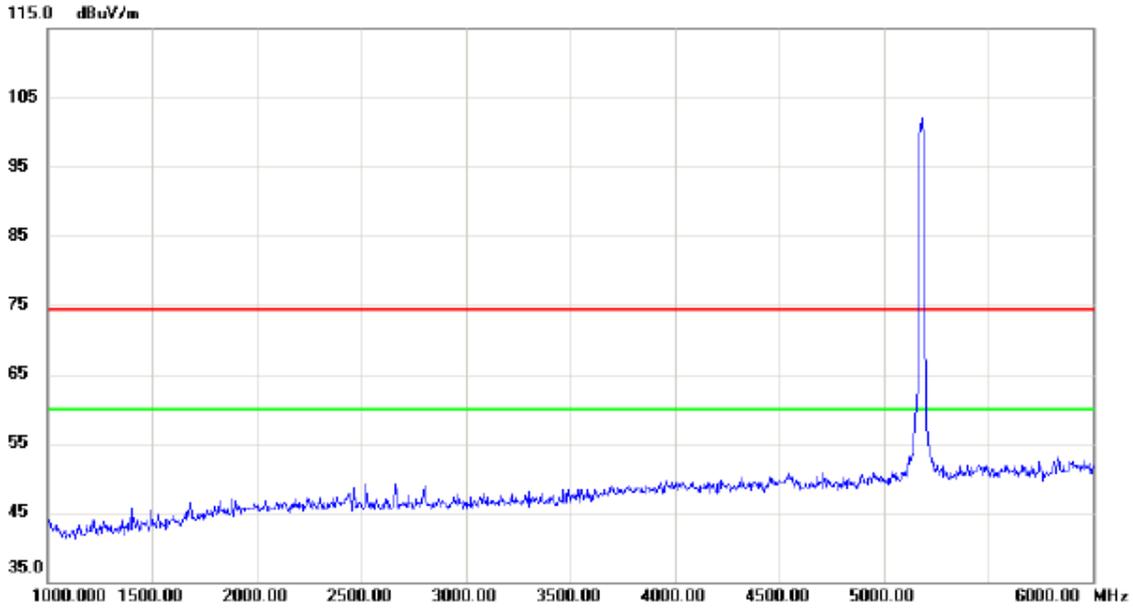


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

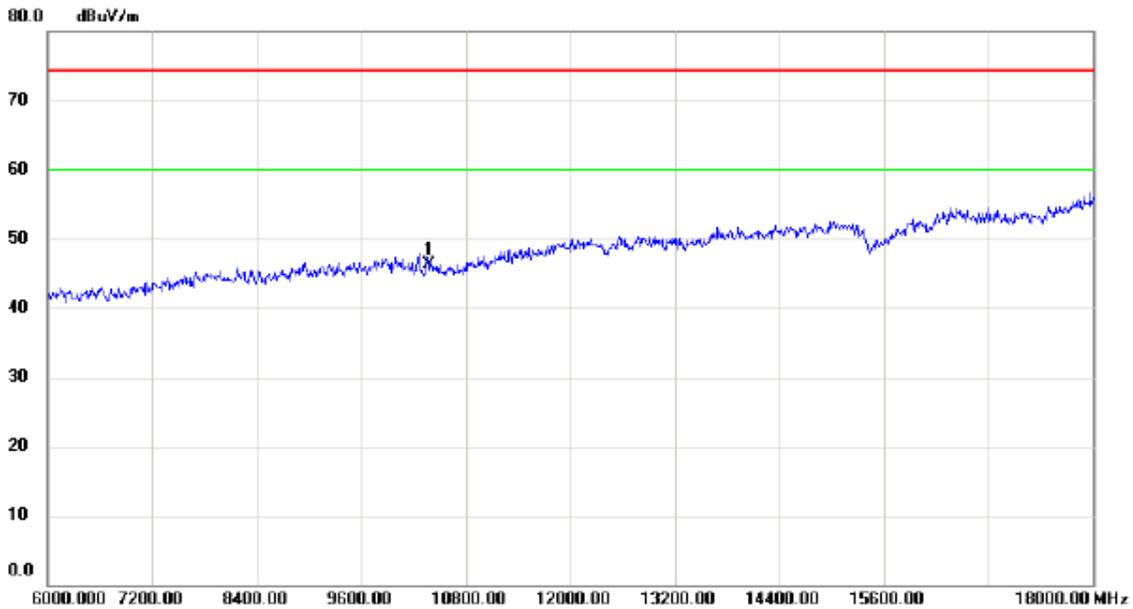


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10380.00	32.46	13.83	46.29	74.30	-28.01	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Vertical

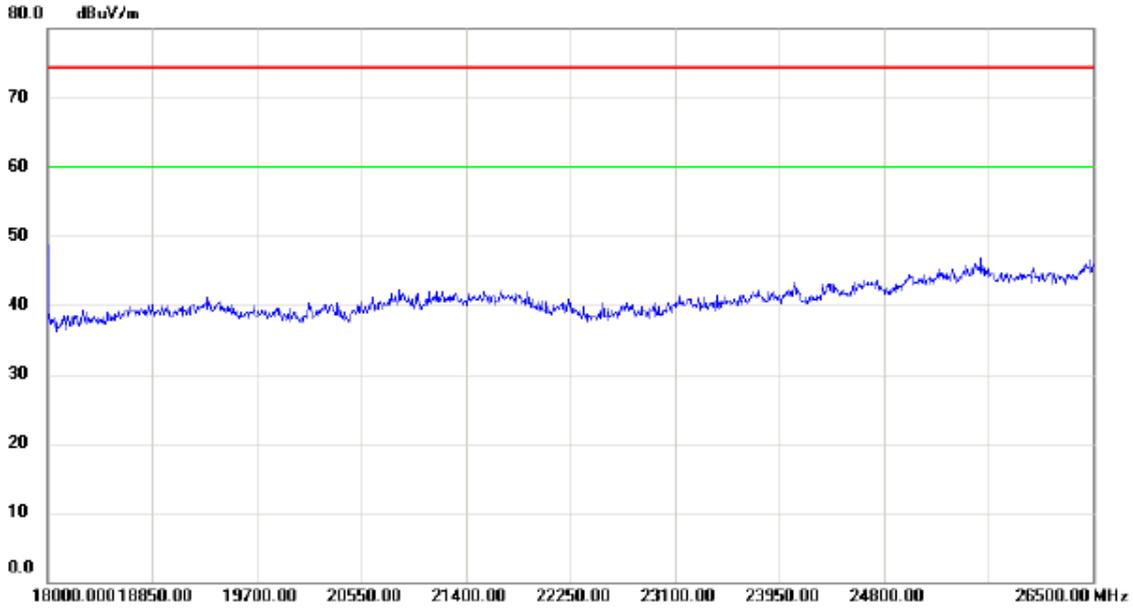


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

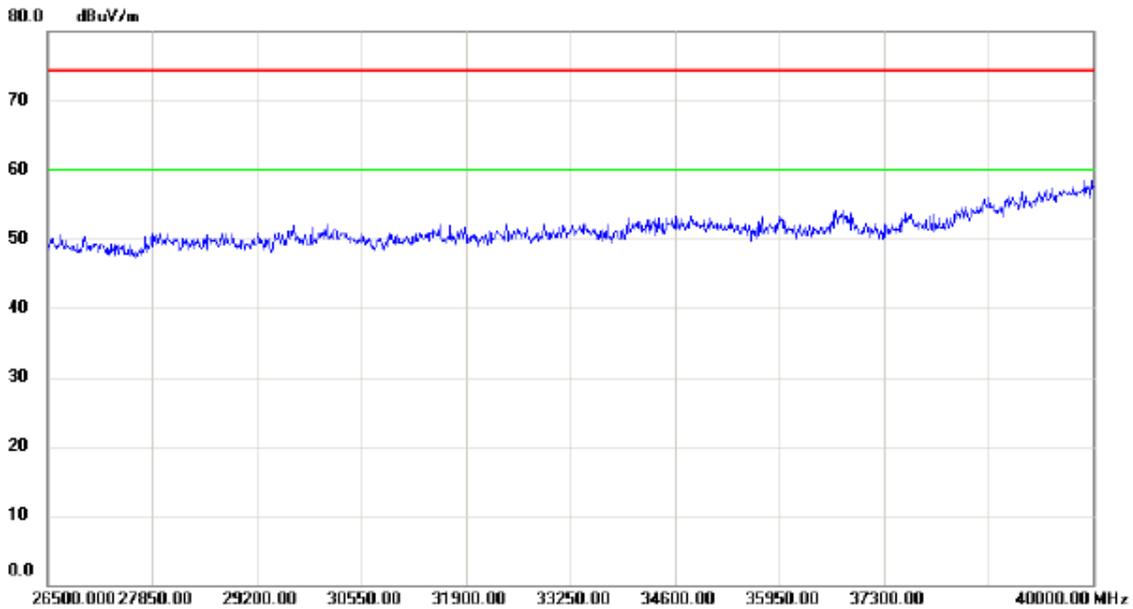

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

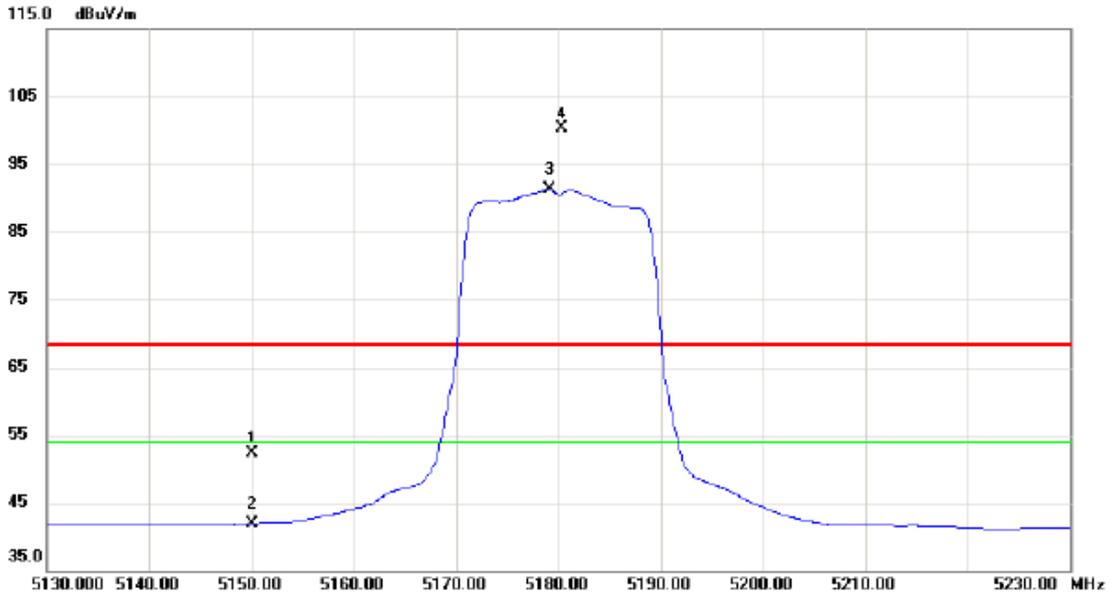


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	11.67	40.63	52.30	68.30	-16.00	peak	
2		5150.000	1.33	40.63	41.96	54.00	-12.04	AVG	
3	*	5179.100	50.53	40.72	91.25	54.00	37.25	AVG	No Limit
4	X	5180.300	59.62	40.72	100.34	68.30	32.04	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Horizontal

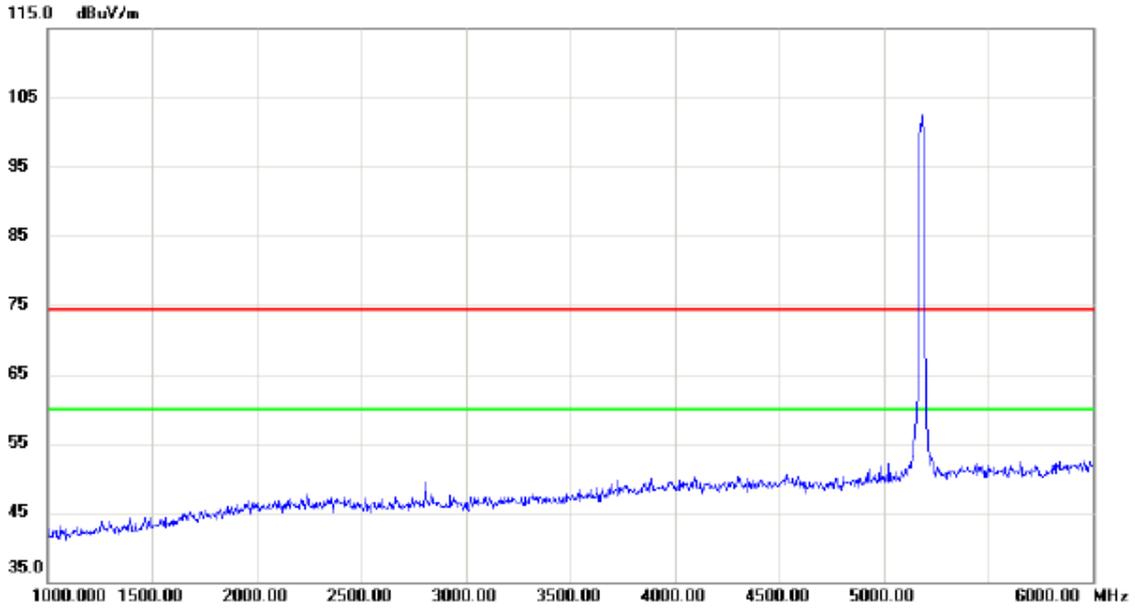


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

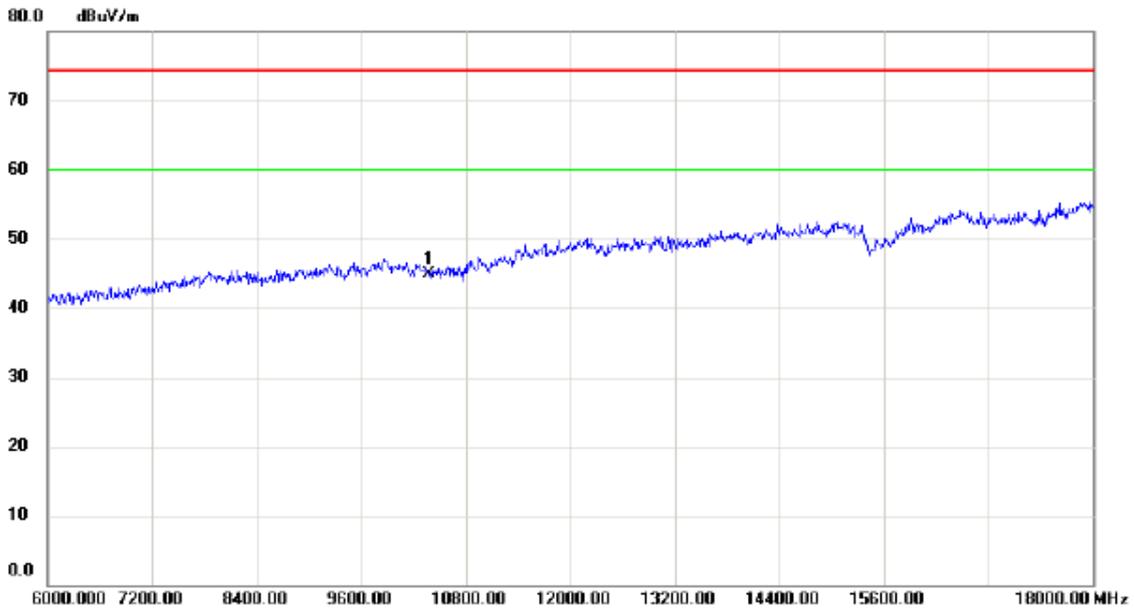


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10380.00	31.16	13.83	44.99	74.30	-29.31	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Horizontal

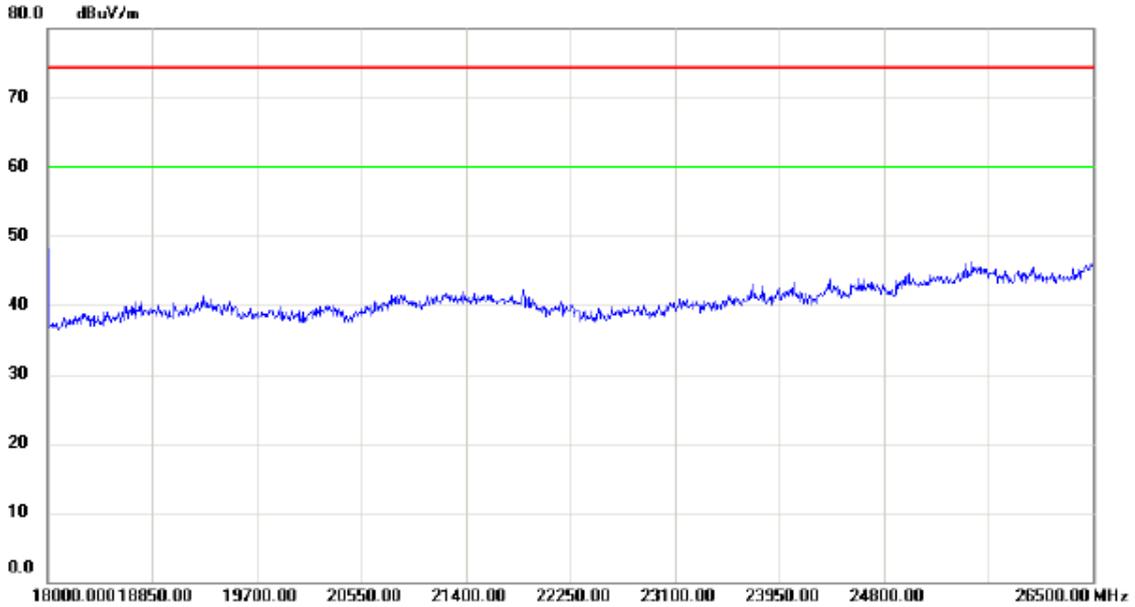


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

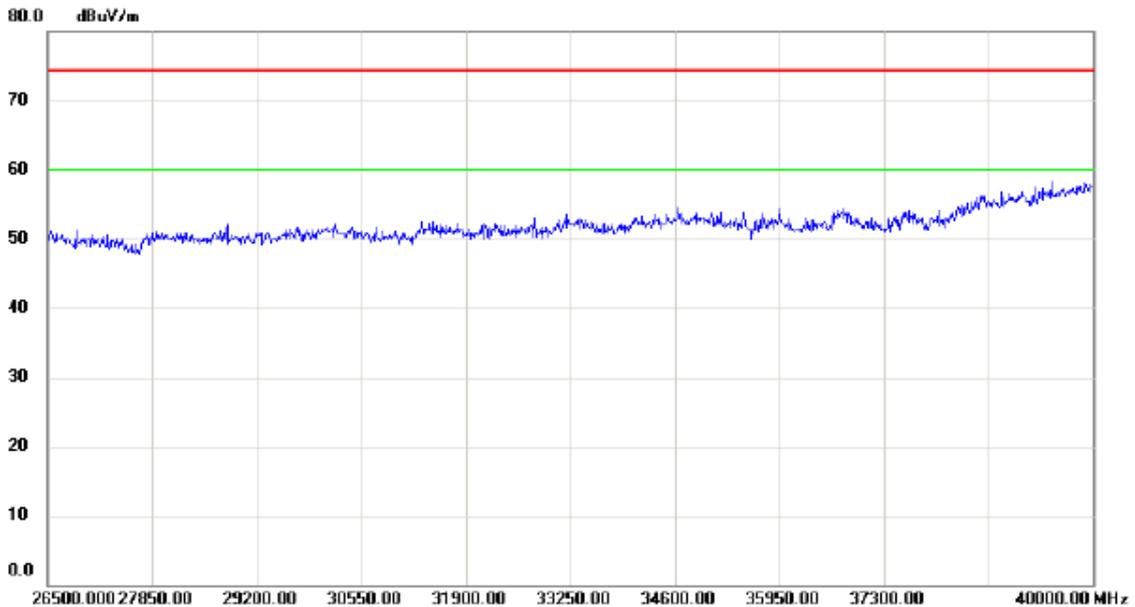

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Vertical

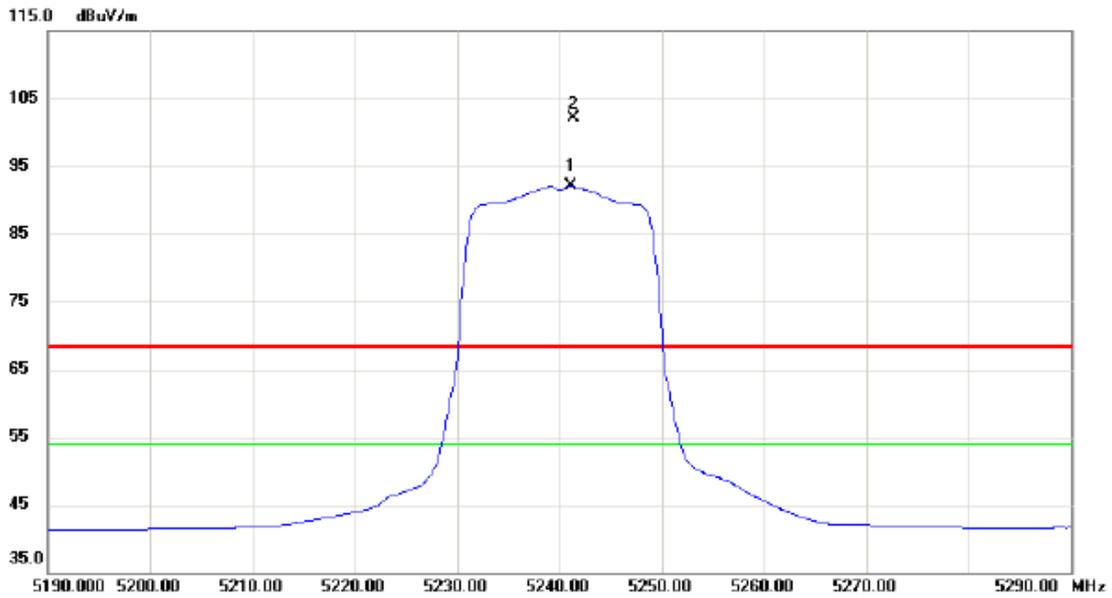


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5241.100	51.22	40.93	92.15	54.00	38.15	AVG	No Limit
2	X	5241.400	61.14	40.93	102.07	68.30	33.77	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Vertical

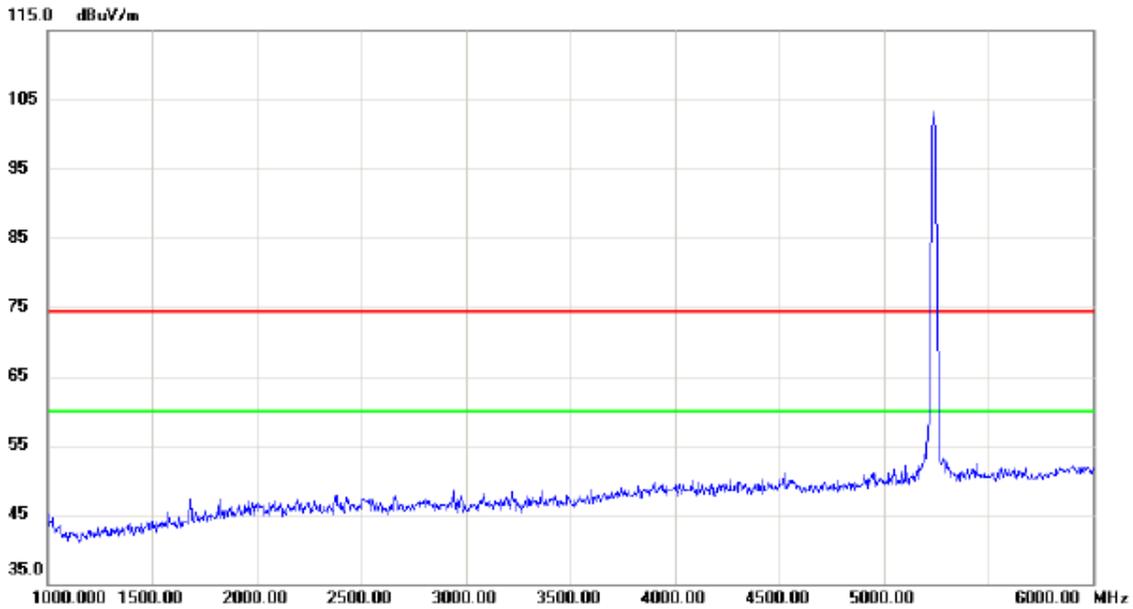


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

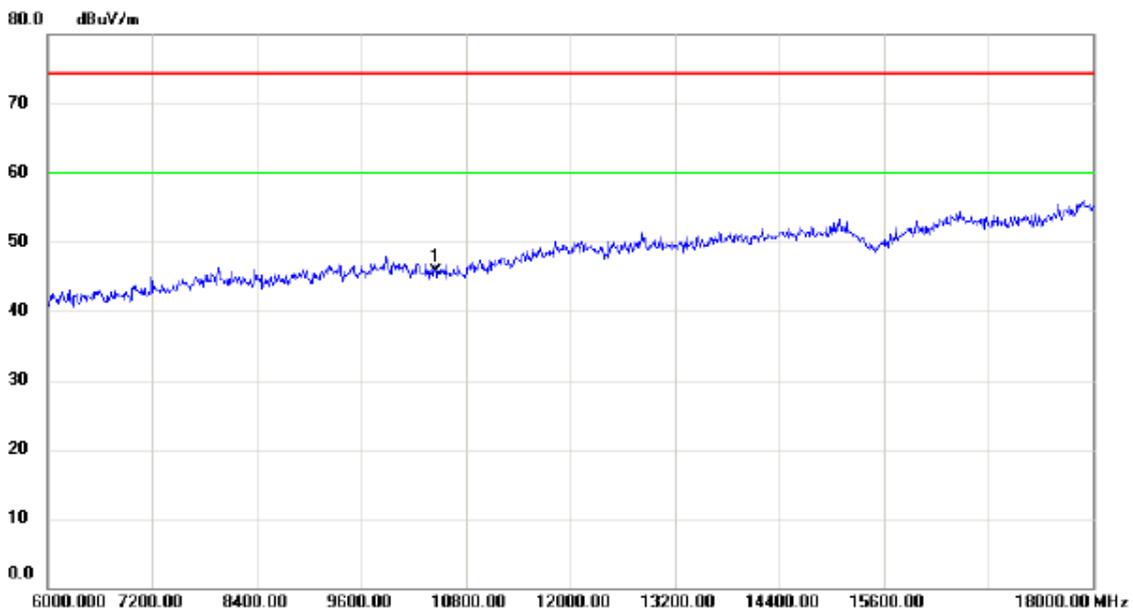


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	32.04	13.71	45.75	74.30	-28.55	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Vertical

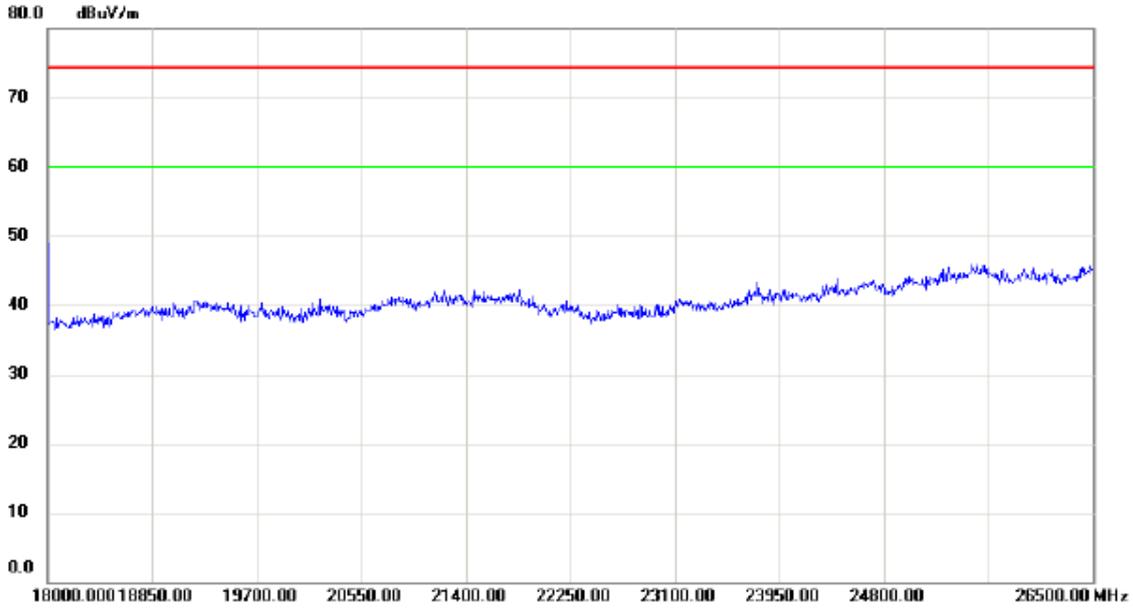


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

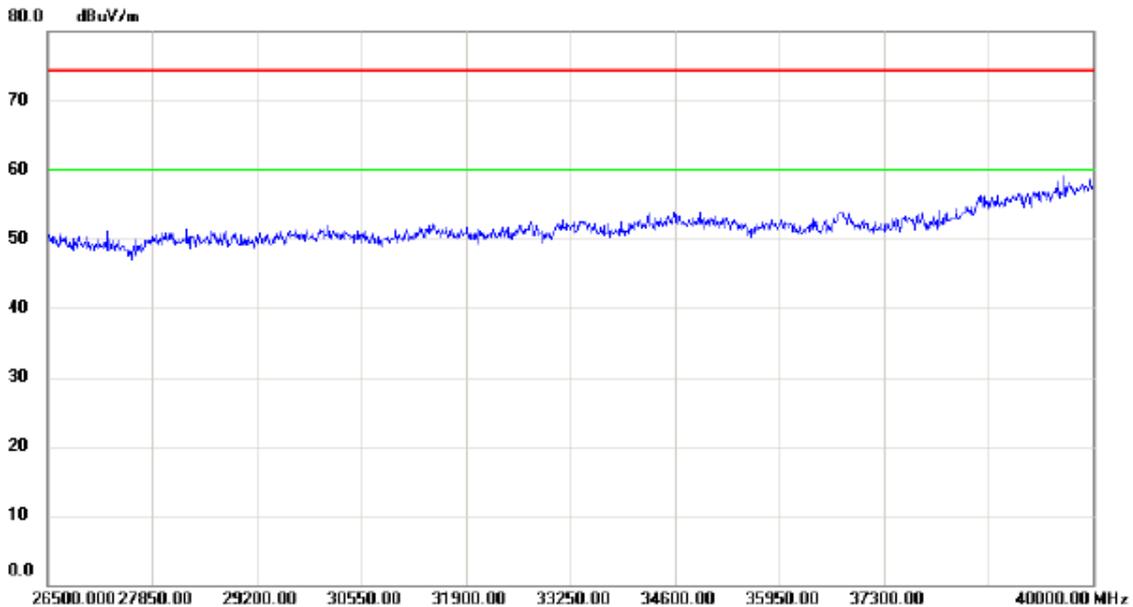

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Horizontal

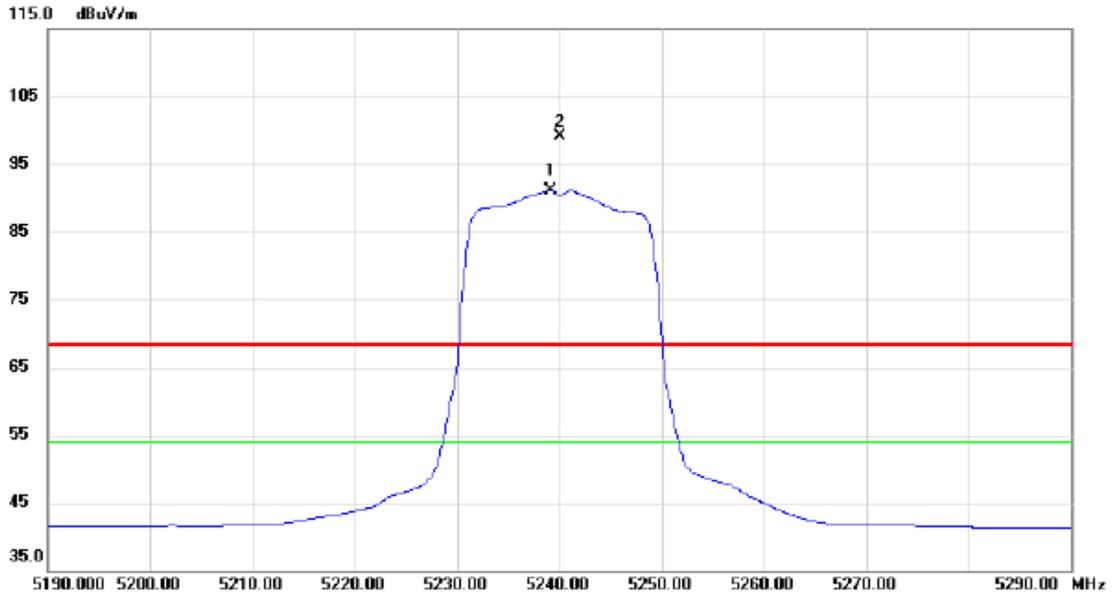


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5239.100	50.26	40.92	91.18	54.00	37.18	AVG	No Limit
2	X	5240.100	58.24	40.93	99.17	68.30	30.87	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Horizontal

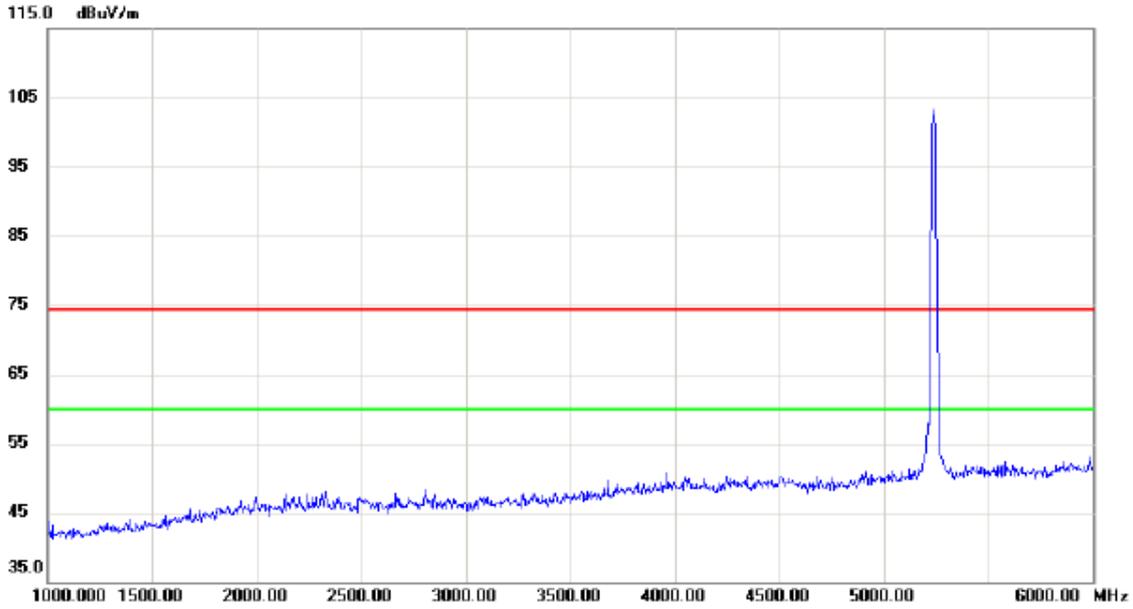


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

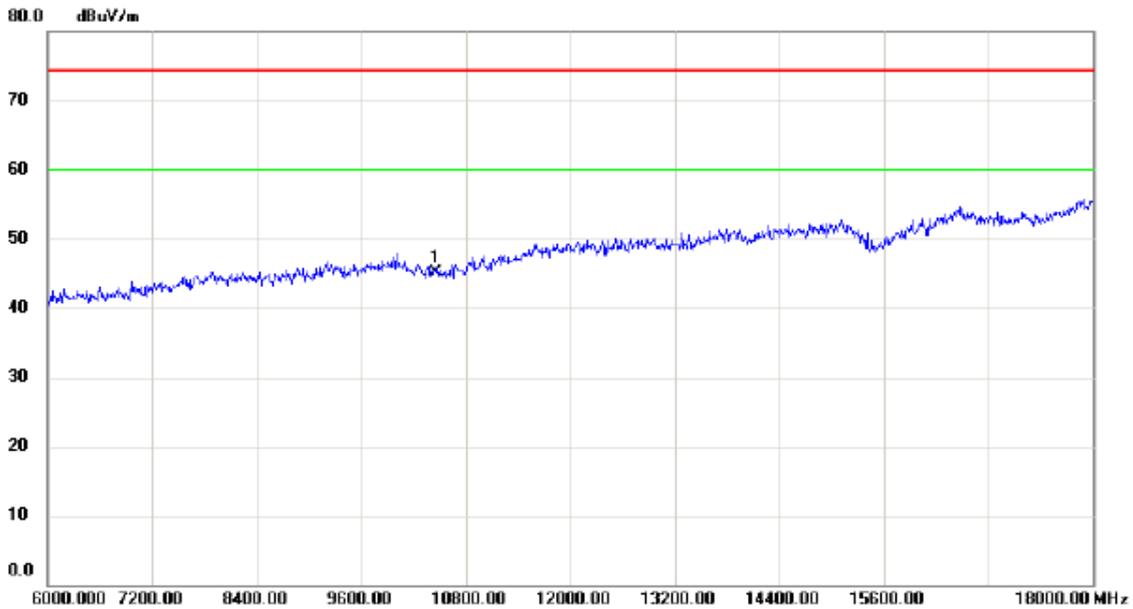


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	31.34	13.71	45.05	74.30	-29.25	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Horizontal

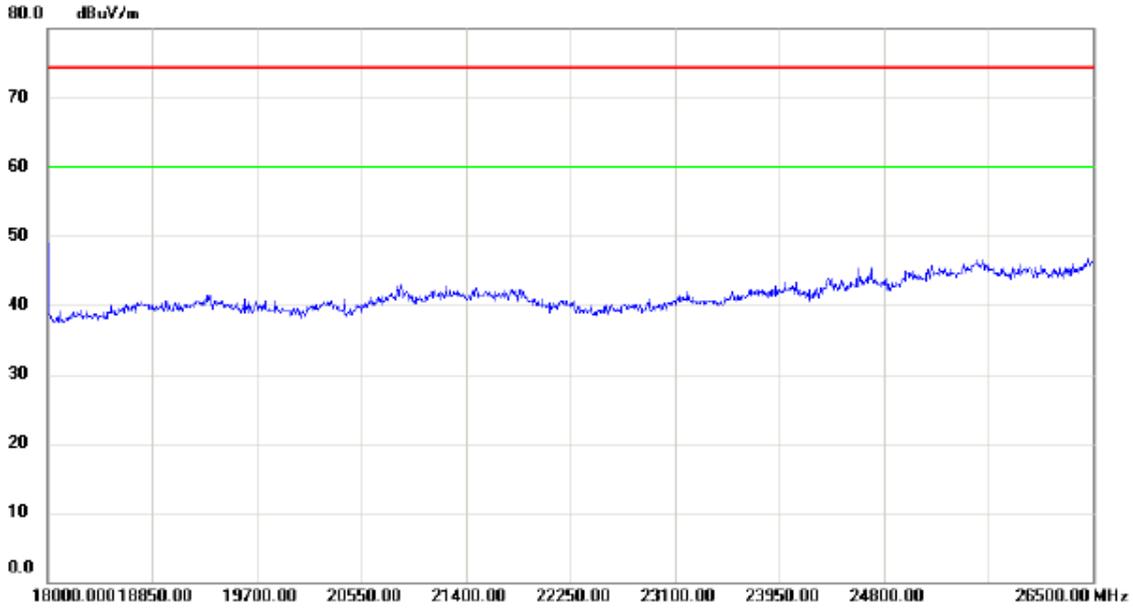


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

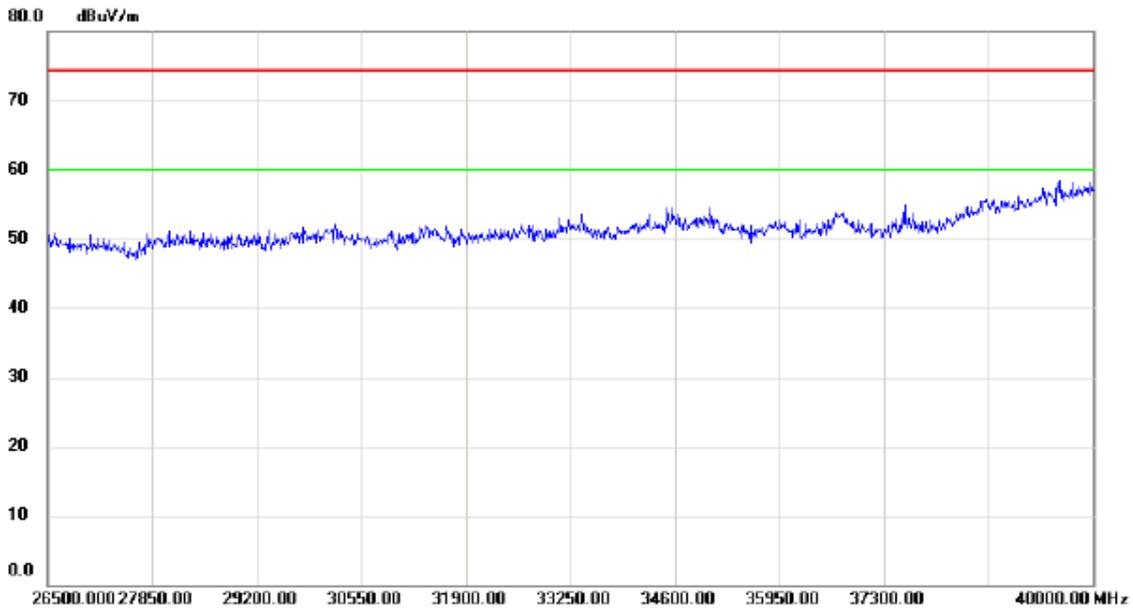

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Vertical

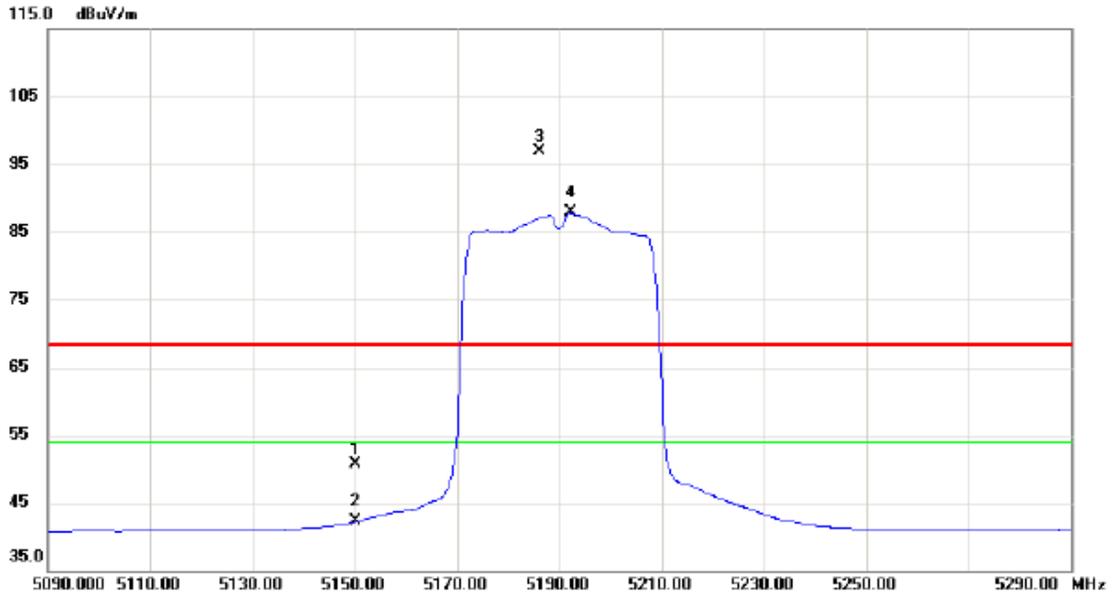


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	10.10	40.63	50.73	68.30	-17.57	peak	
2		5150.000	1.59	40.63	42.22	54.00	-11.78	AVG	
3	X	5186.200	56.11	40.75	96.86	68.30	28.56	peak	No Limit
4	*	5192.200	47.07	40.76	87.83	54.00	33.83	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

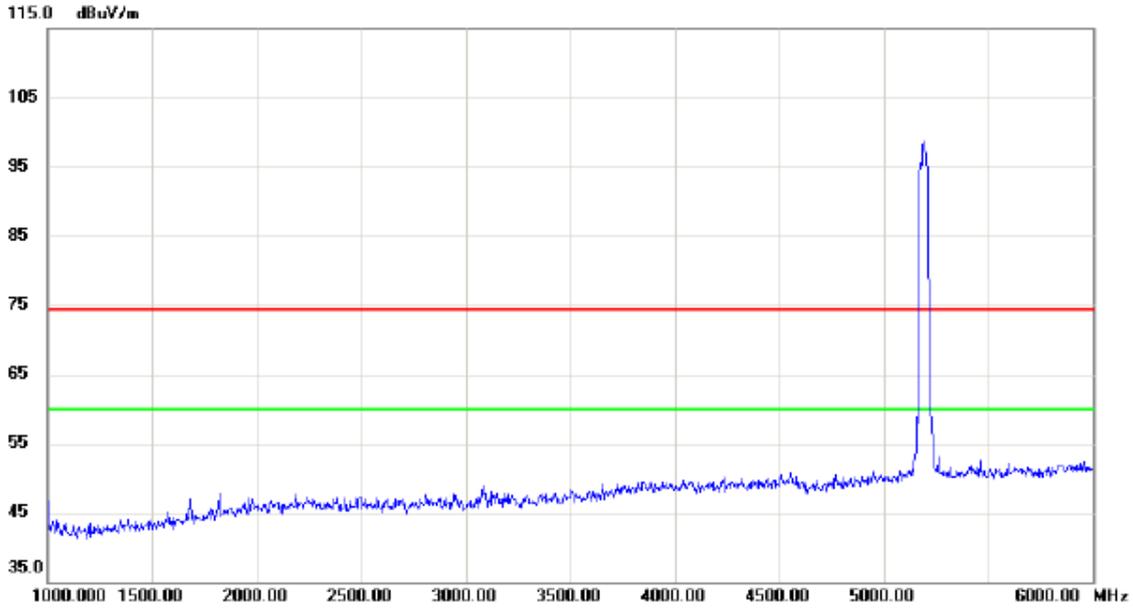


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

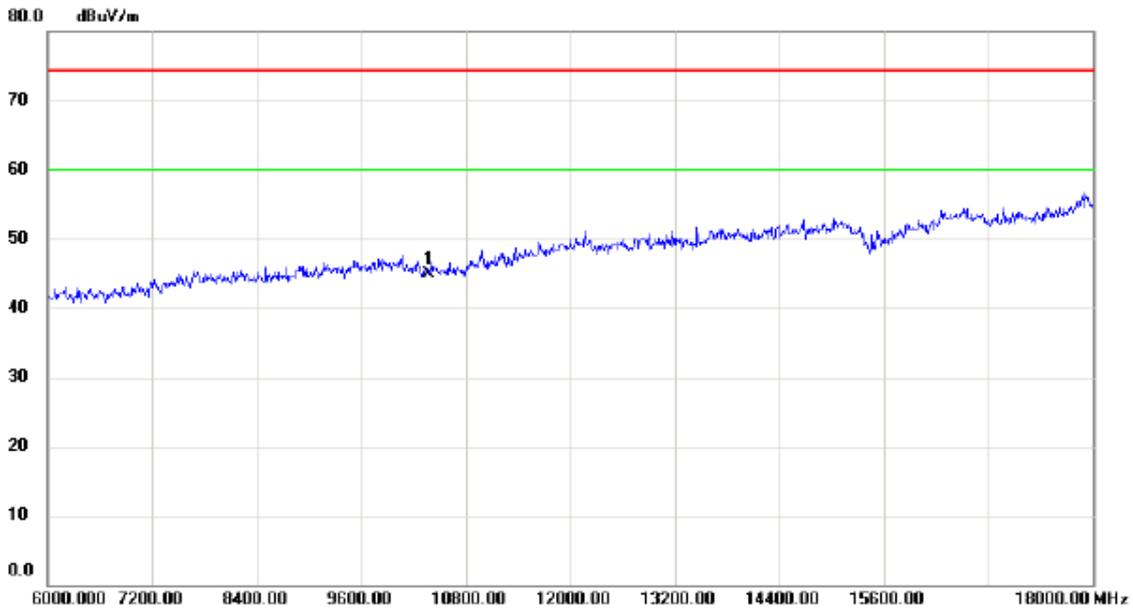


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10380.00	31.02	13.83	44.85	74.30	-29.45	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

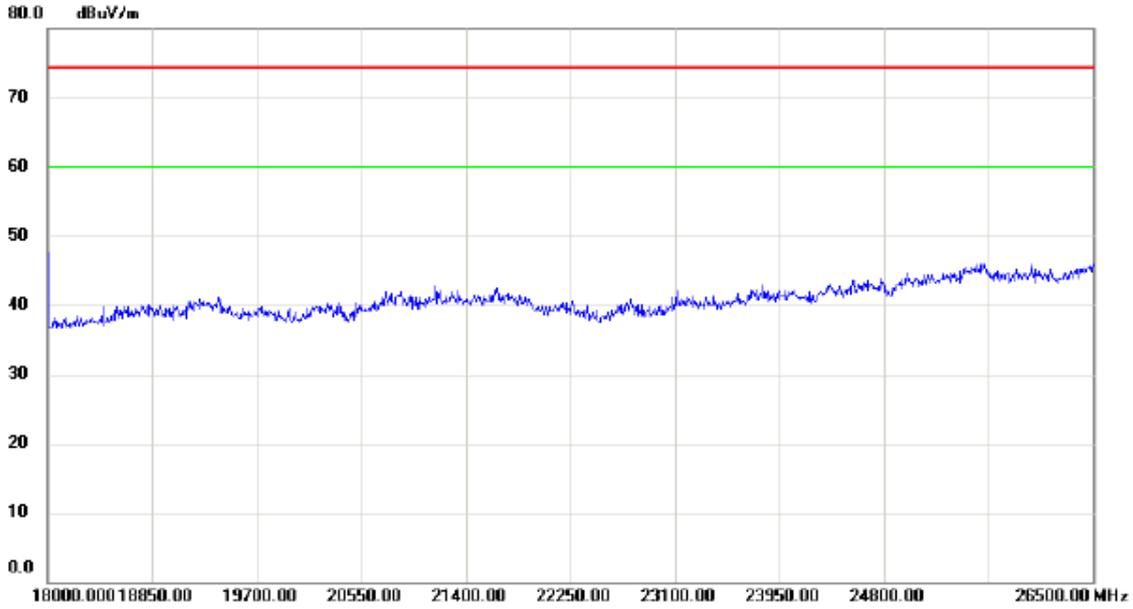


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

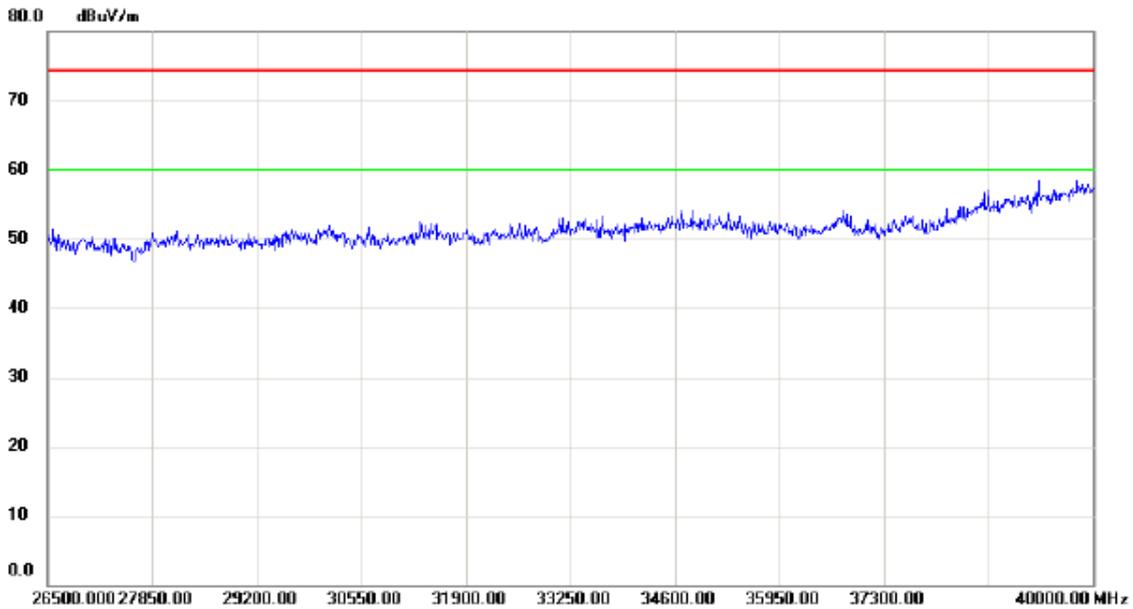

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Horizontal

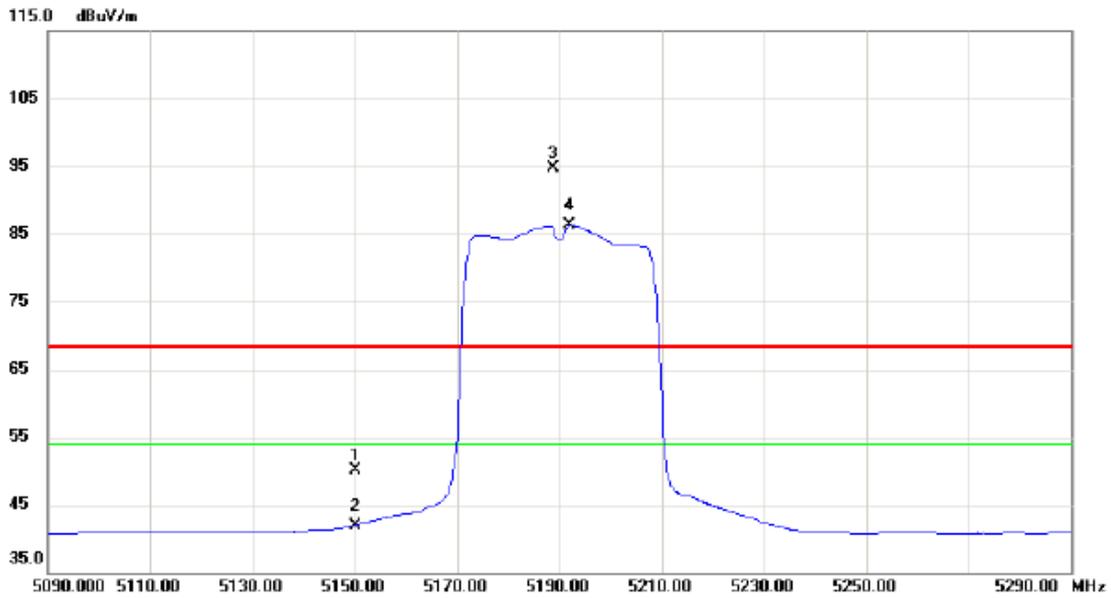


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	9.47	40.63	50.10	68.30	-18.20	peak	
2		5150.000	1.37	40.63	42.00	54.00	-12.00	AVG	
3	X	5188.800	54.00	40.75	94.75	68.30	26.45	peak	No Limit
4	*	5192.000	45.58	40.76	86.34	54.00	32.34	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal

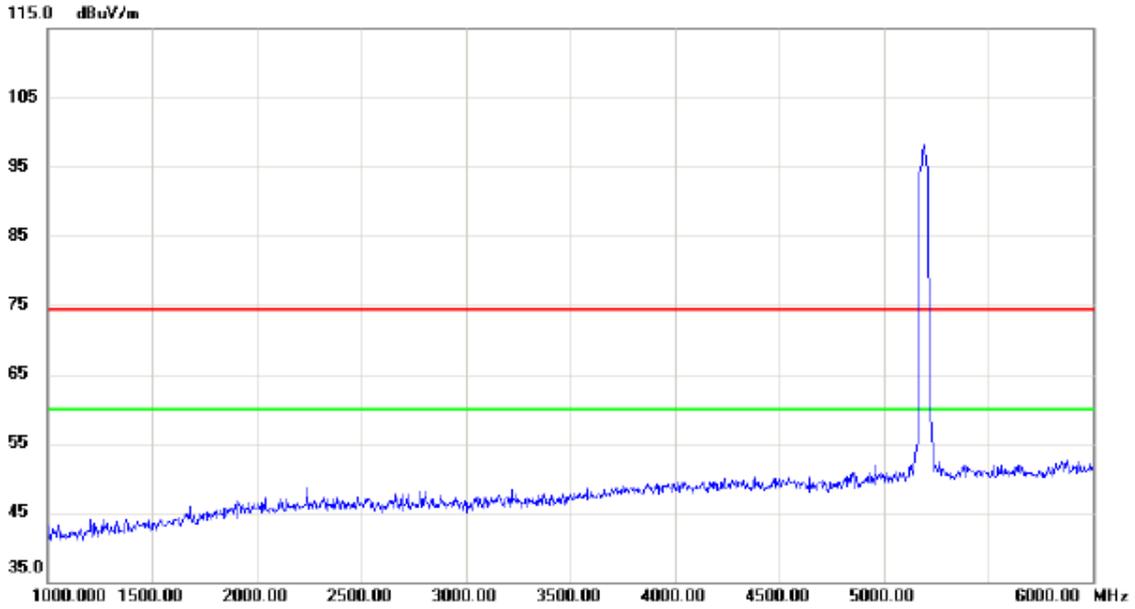


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

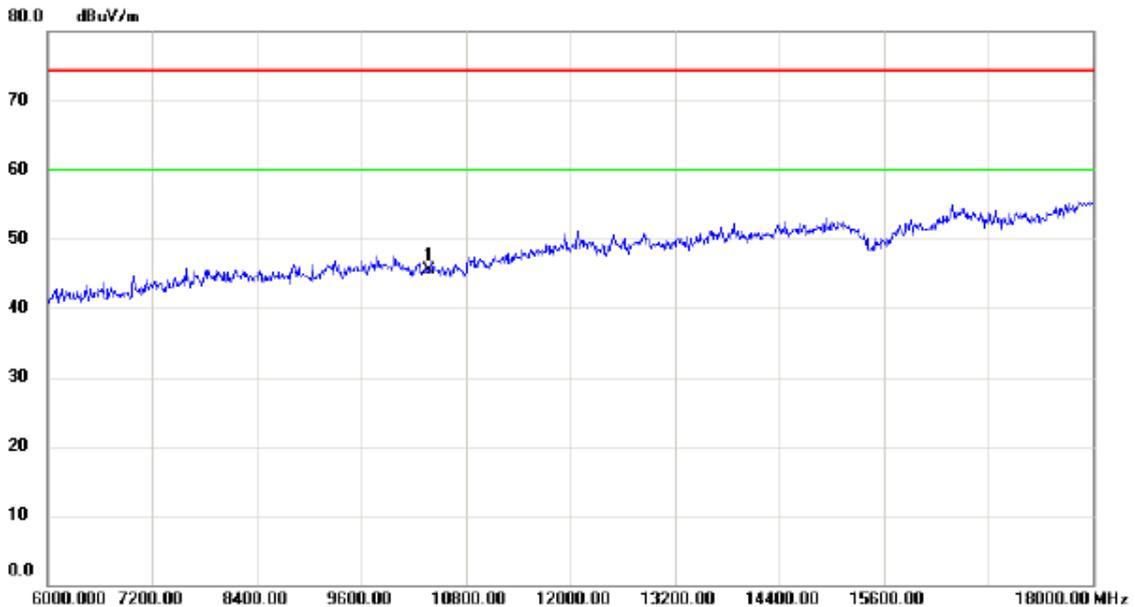


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10380.00	31.76	13.83	45.59	74.30	-28.71	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal

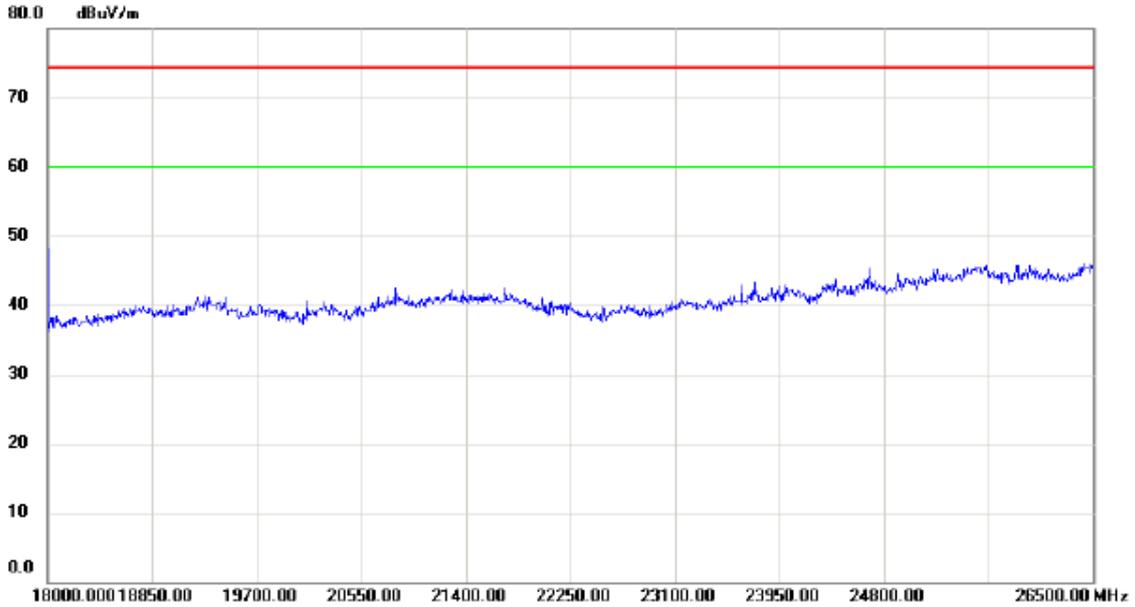


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

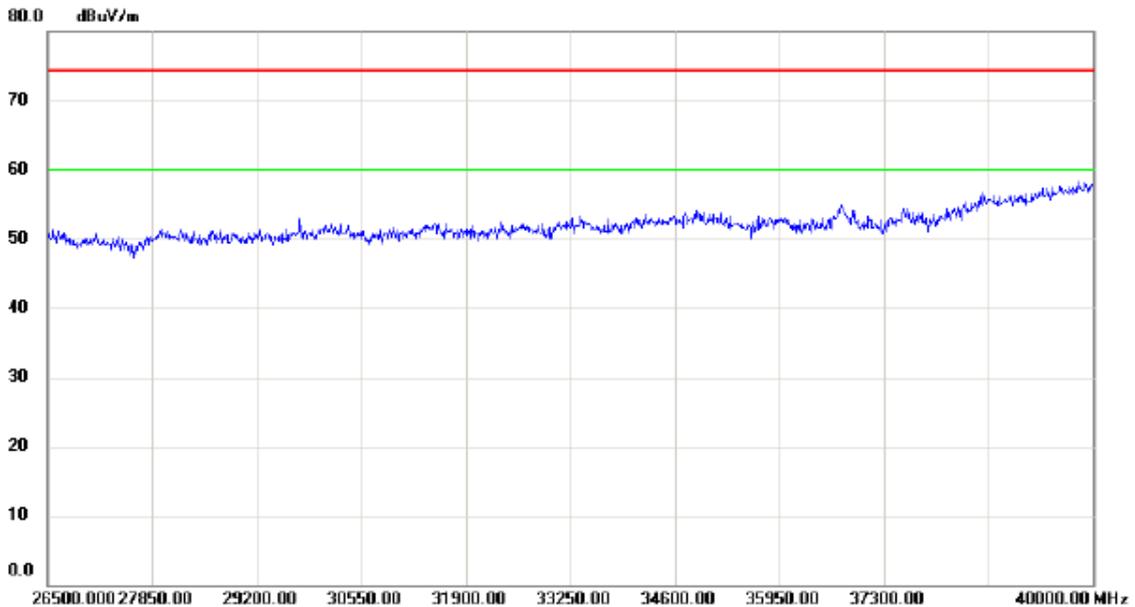

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Vertical

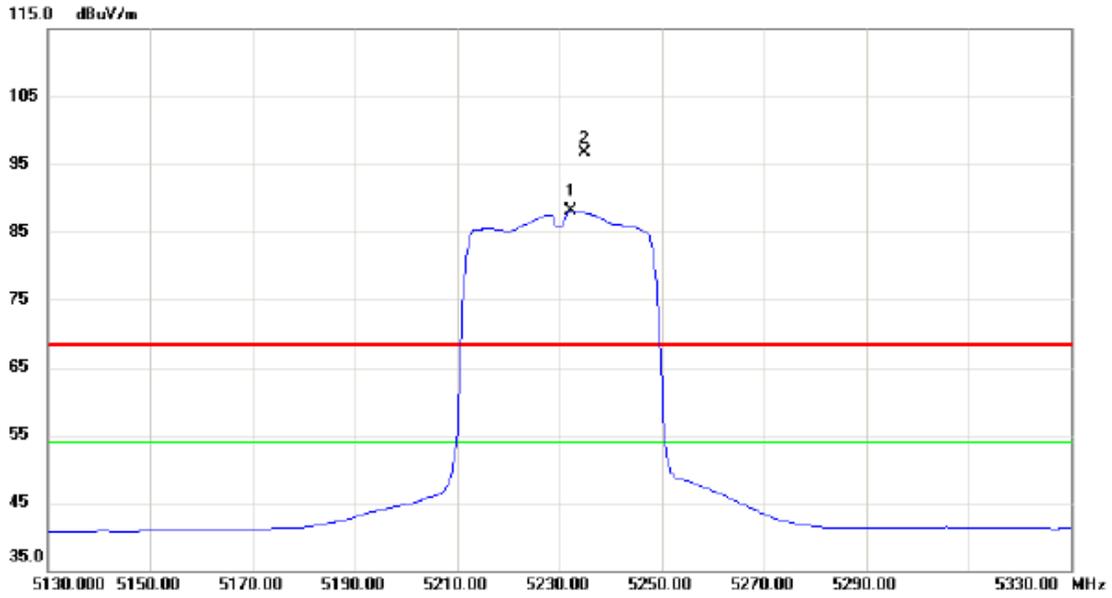


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5232.200	47.18	40.90	88.08	54.00	34.08	AVG	No Limit
2	X	5235.000	55.75	40.90	96.65	68.30	28.35	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical

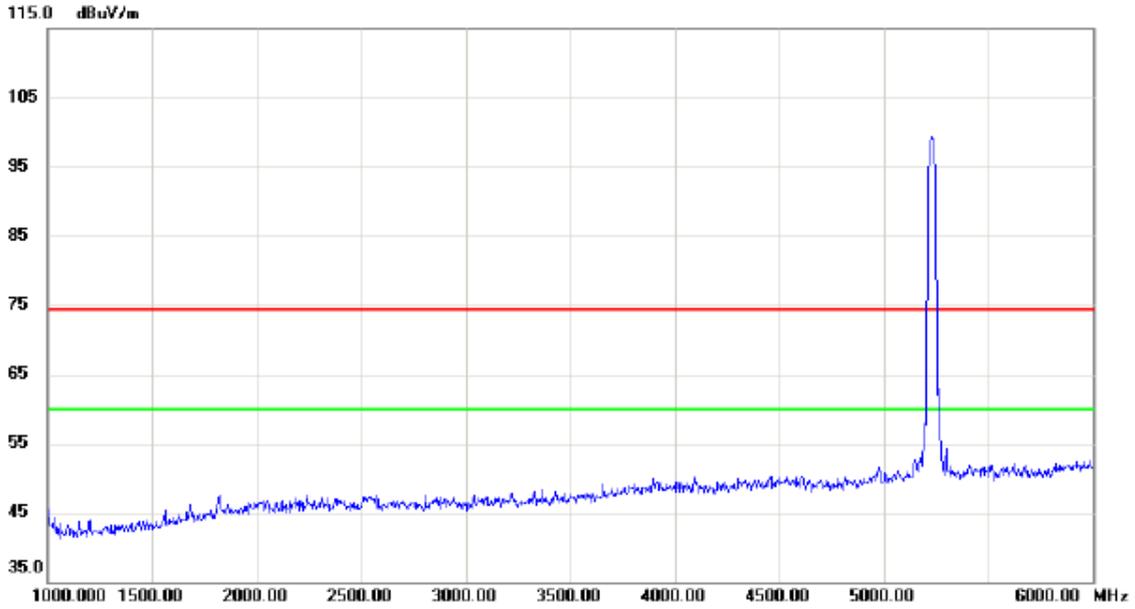


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

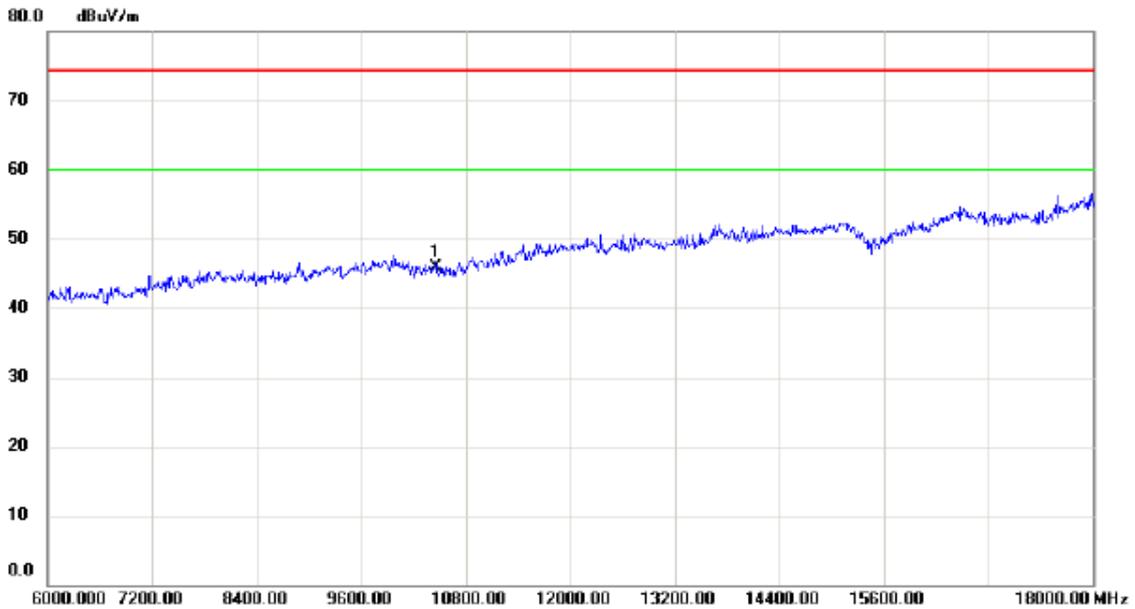


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10460.00	32.23	13.71	45.94	74.30	-28.36	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical

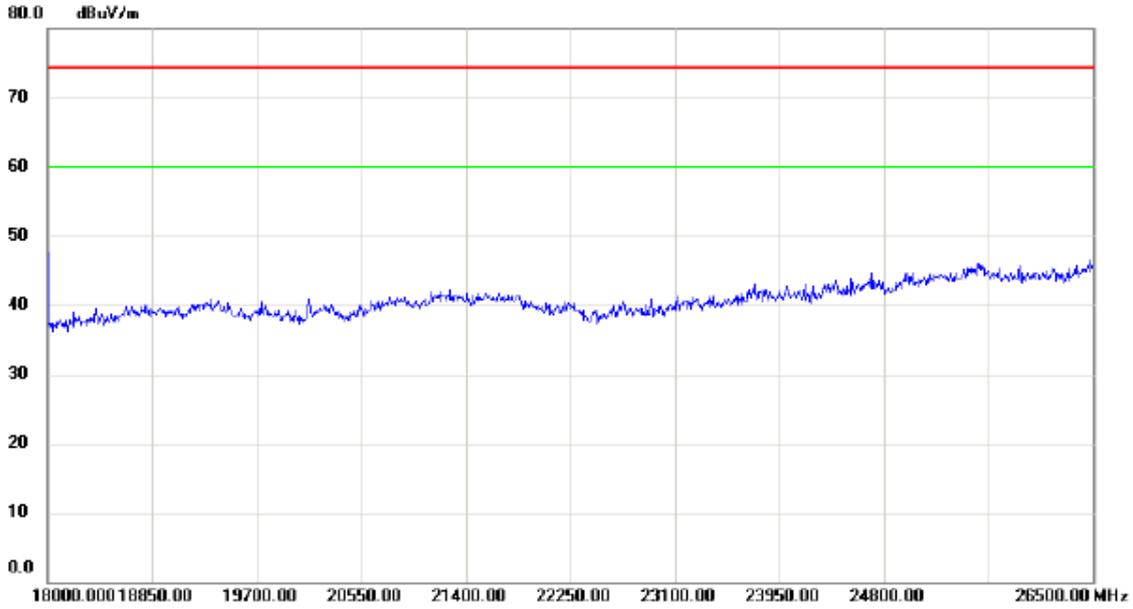


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

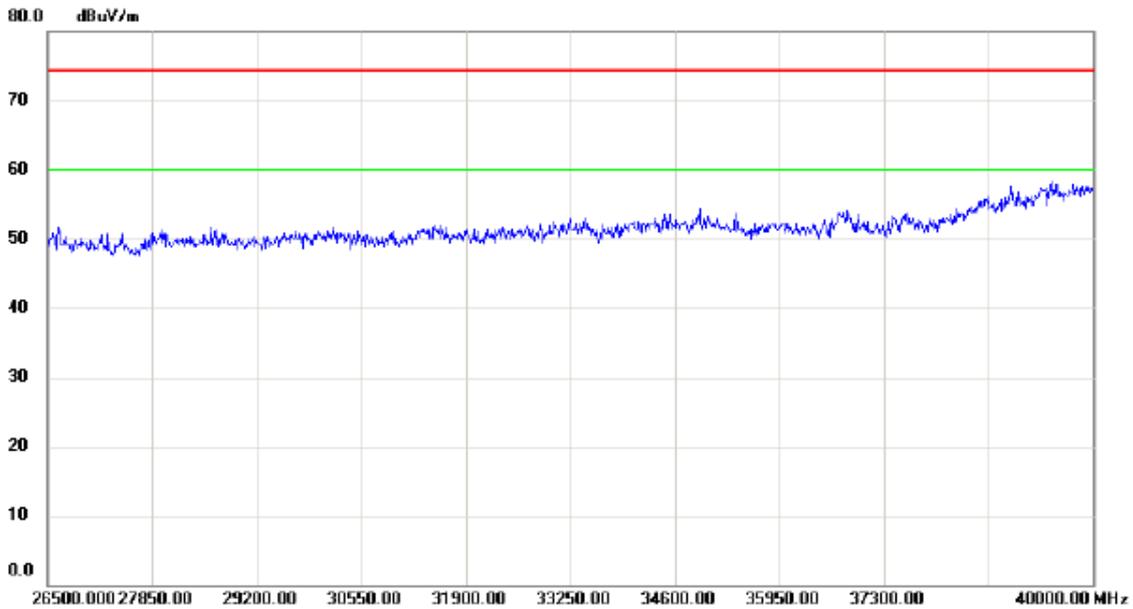

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Horizontal

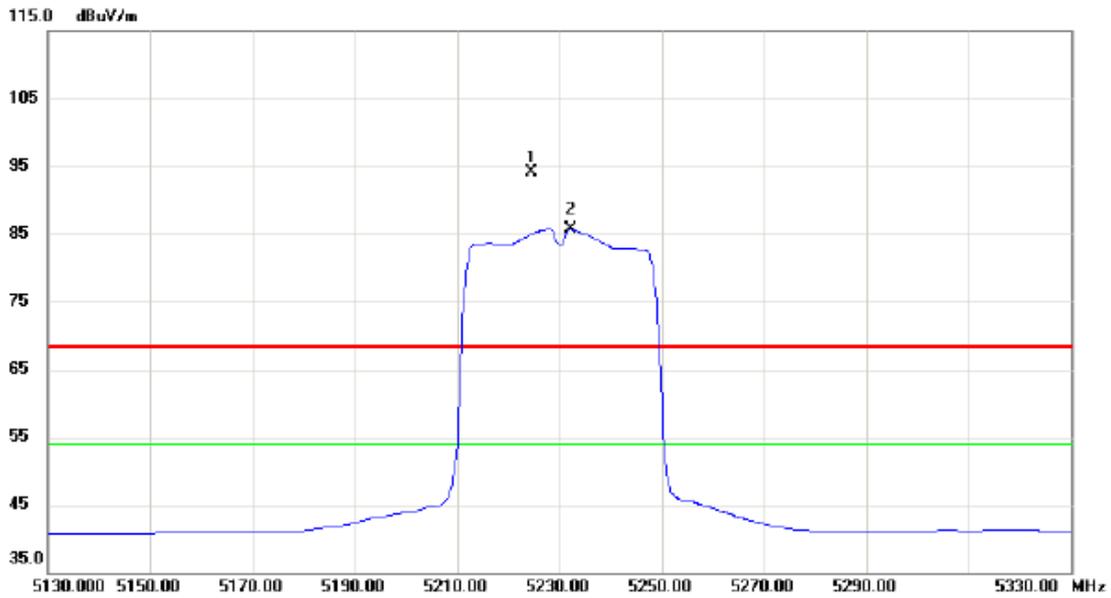


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5224.600	53.31	40.87	94.18	68.30	25.88	peak	No Limit
2	*	5232.200	44.73	40.90	85.63	54.00	31.63	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal

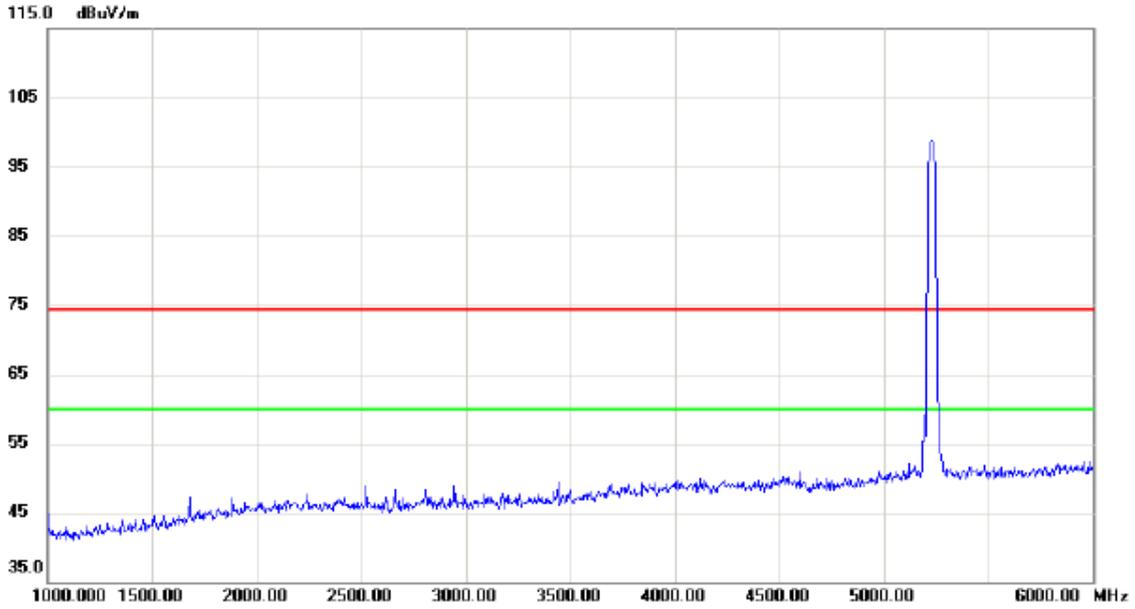


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

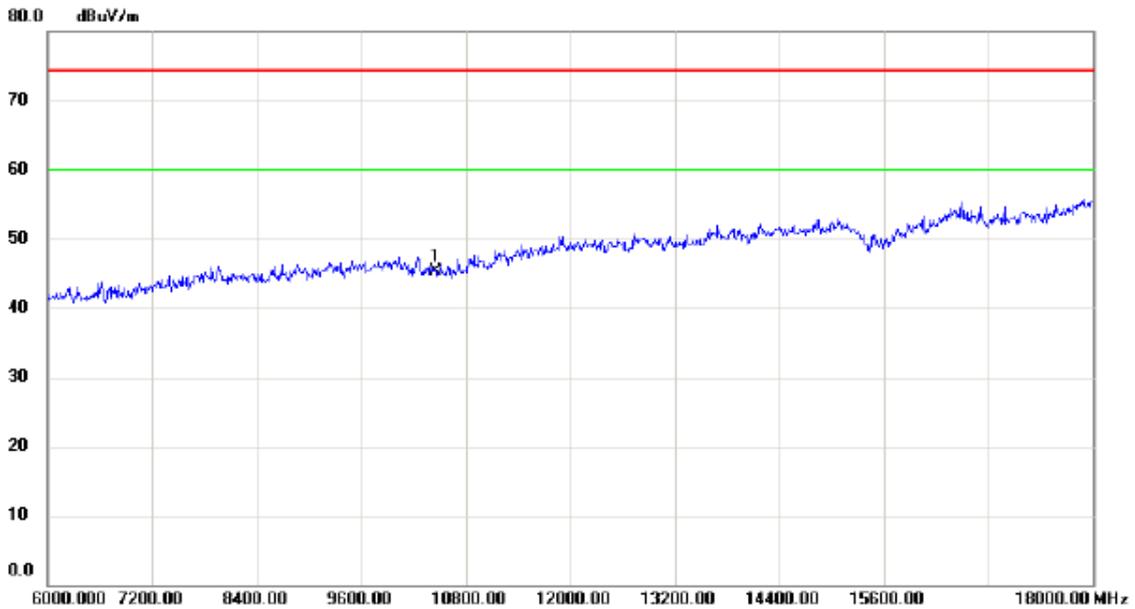


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10460.00	31.53	13.71	45.24	74.30	-29.06	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal

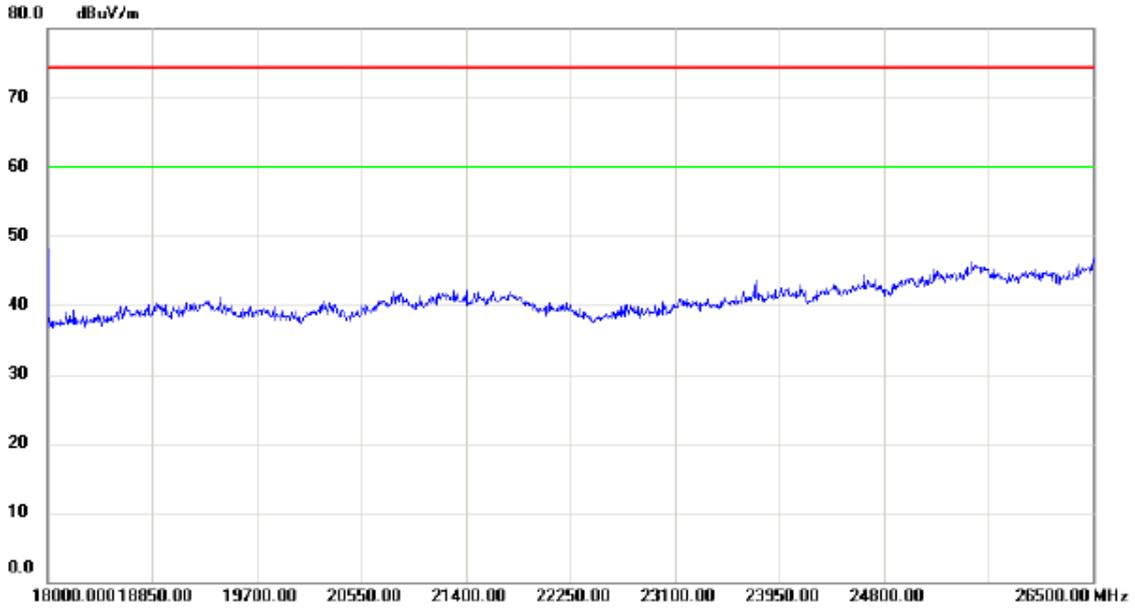


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

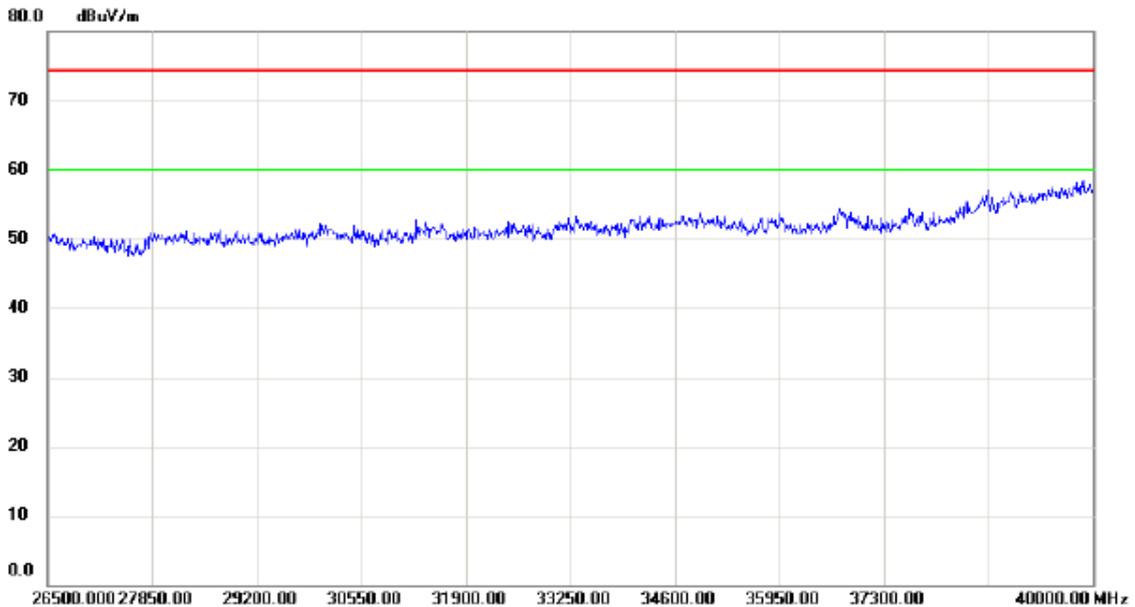

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Vertical

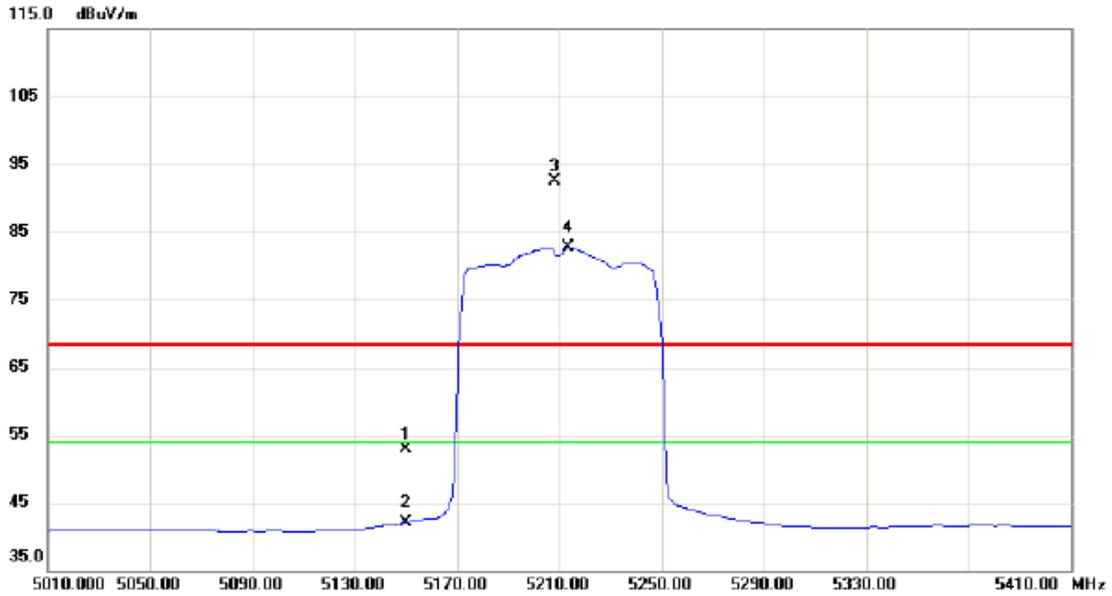


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	12.37	40.63	53.00	68.30	-15.30	peak	
2		5150.000	1.47	40.63	42.10	54.00	-11.90	AVG	
3	X	5208.000	51.64	40.82	92.46	68.30	24.16	peak	No Limit
4	*	5213.600	41.93	40.83	82.76	54.00	28.76	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

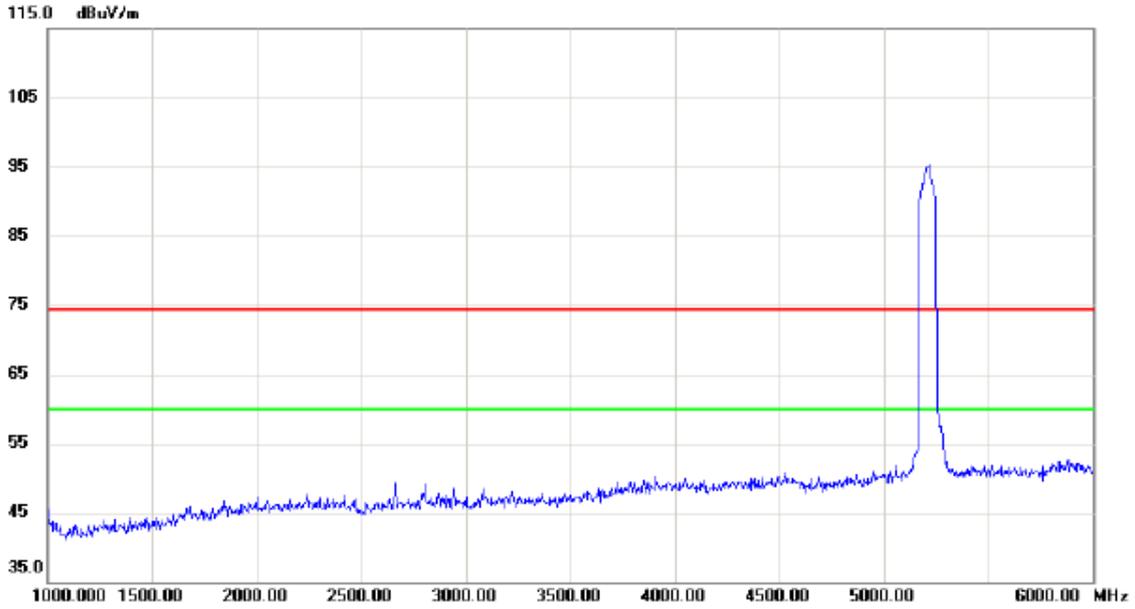


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

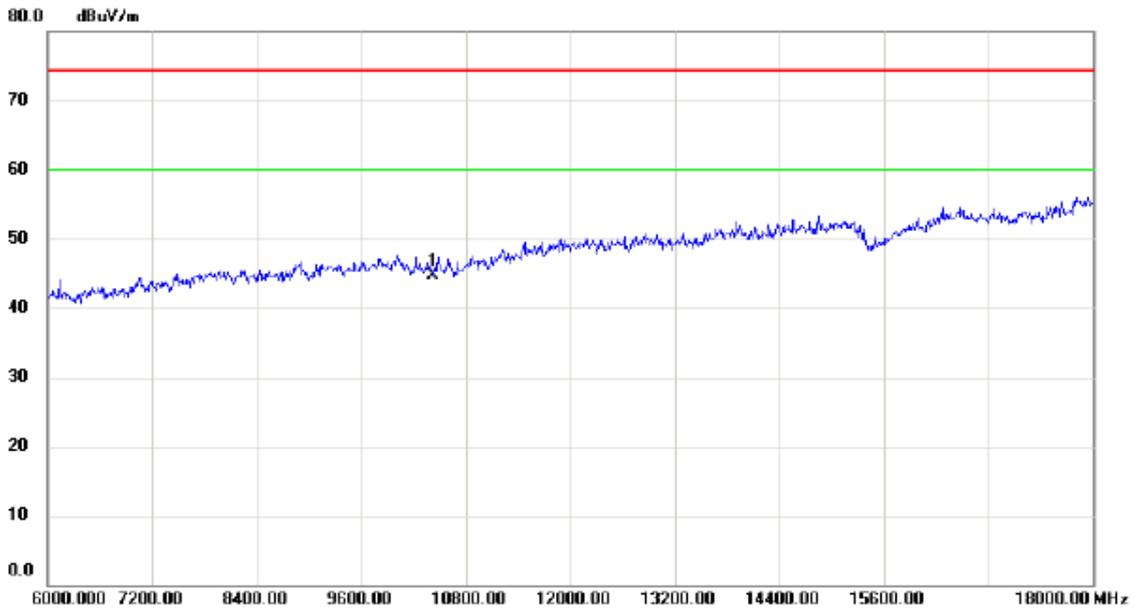


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10420.00	31.02	13.77	44.79	74.30	-29.51	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

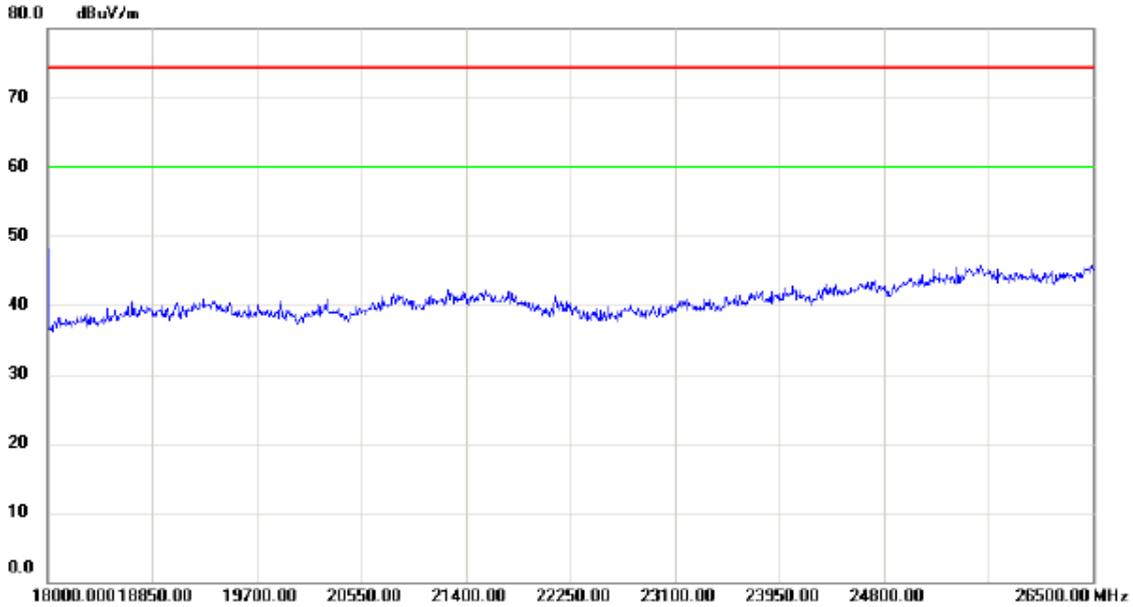


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

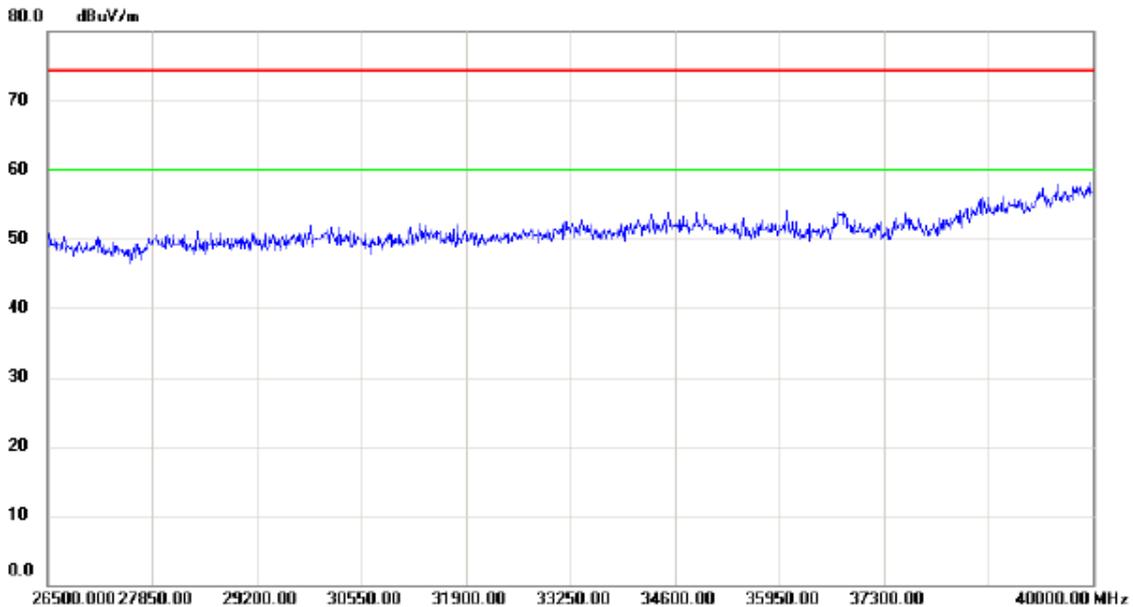

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

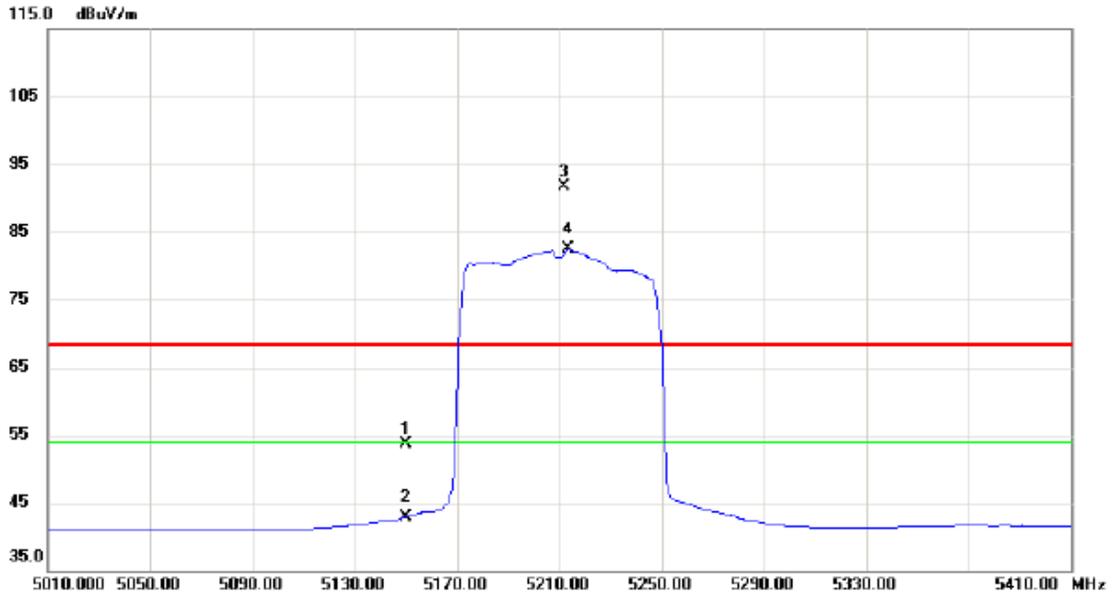


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	13.14	40.63	53.77	68.30	-14.53	peak	
2		5150.000	2.34	40.63	42.97	54.00	-11.03	AVG	
3	X	5211.600	50.88	40.83	91.71	68.30	23.41	peak	No Limit
4	*	5213.600	41.63	40.83	82.46	54.00	28.46	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal

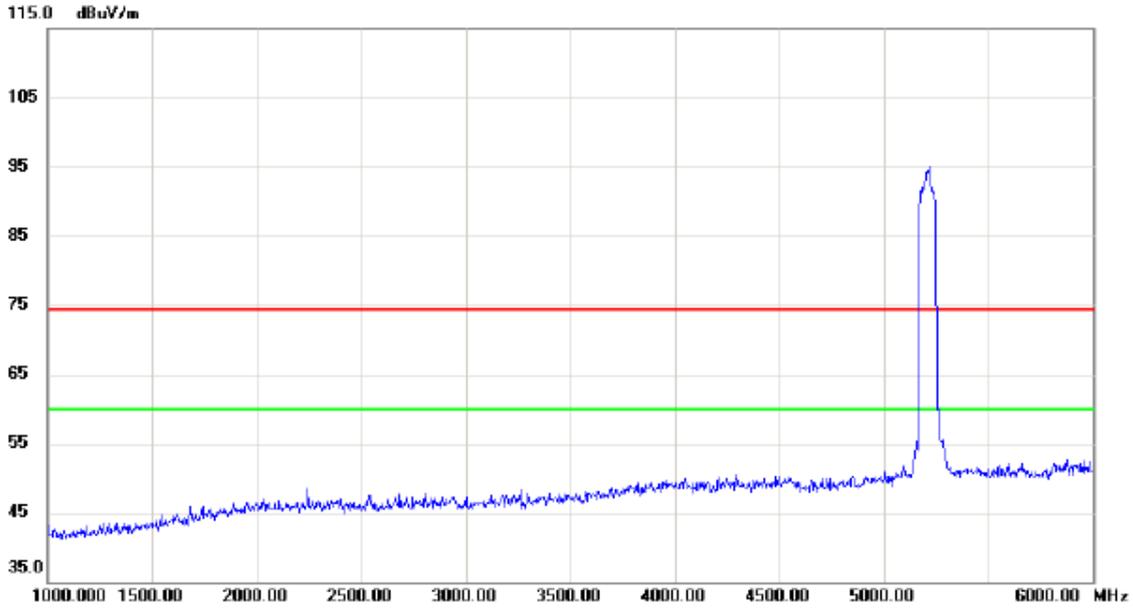


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

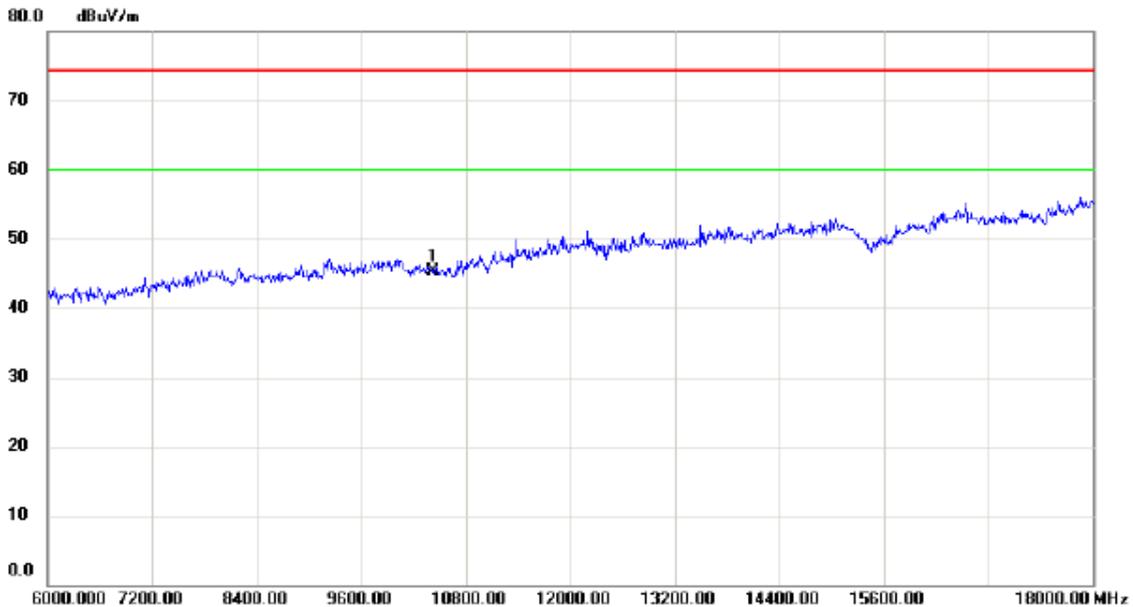


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10420.00	31.58	13.77	45.35	74.30	-28.95	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal

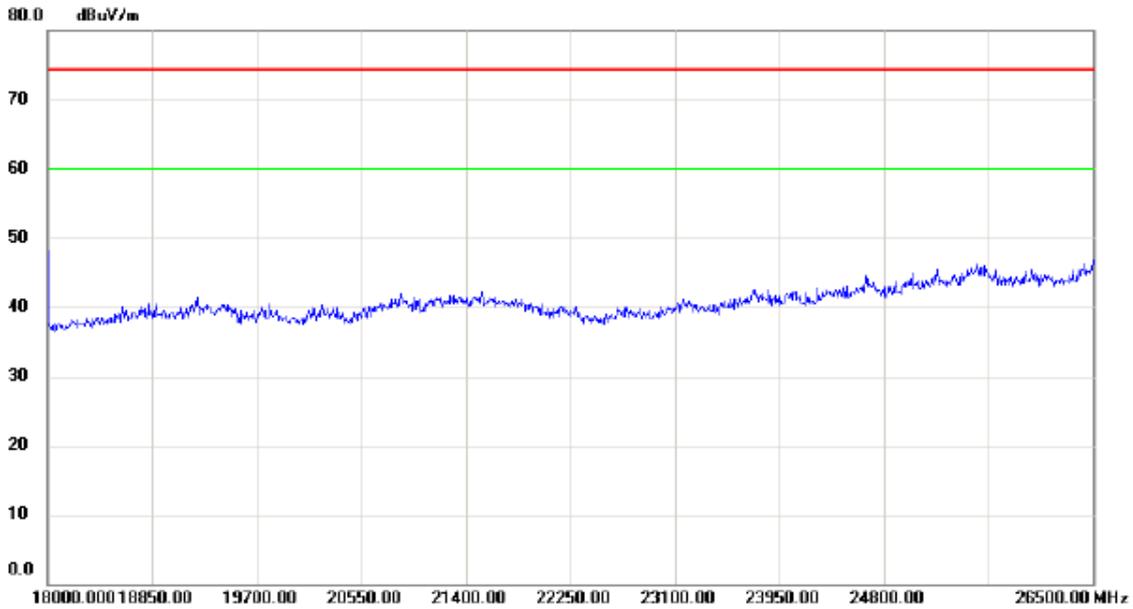


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

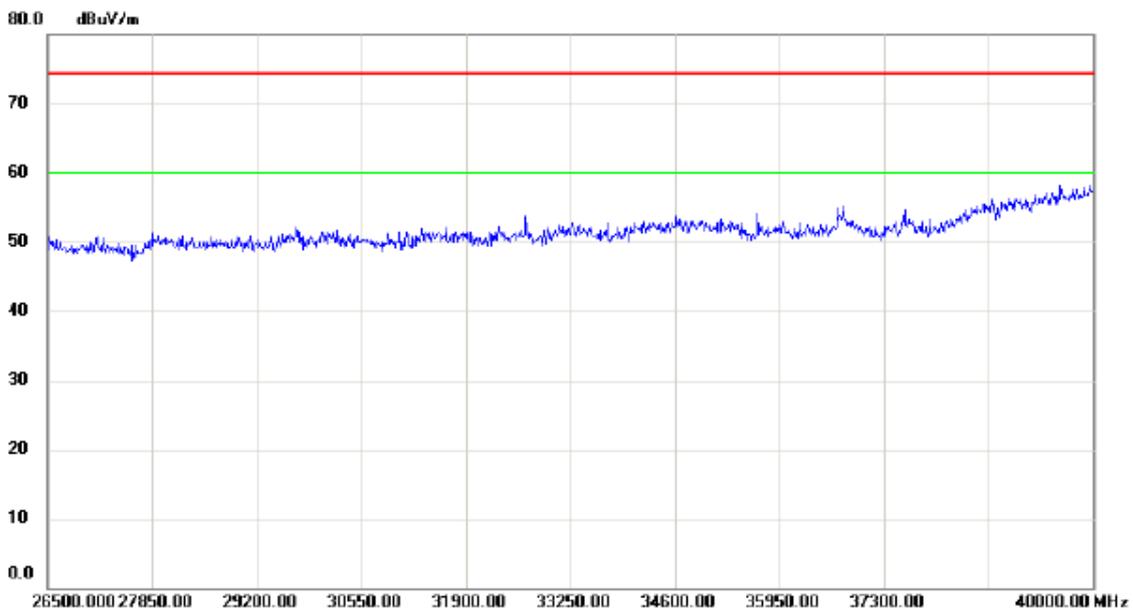

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Vertical

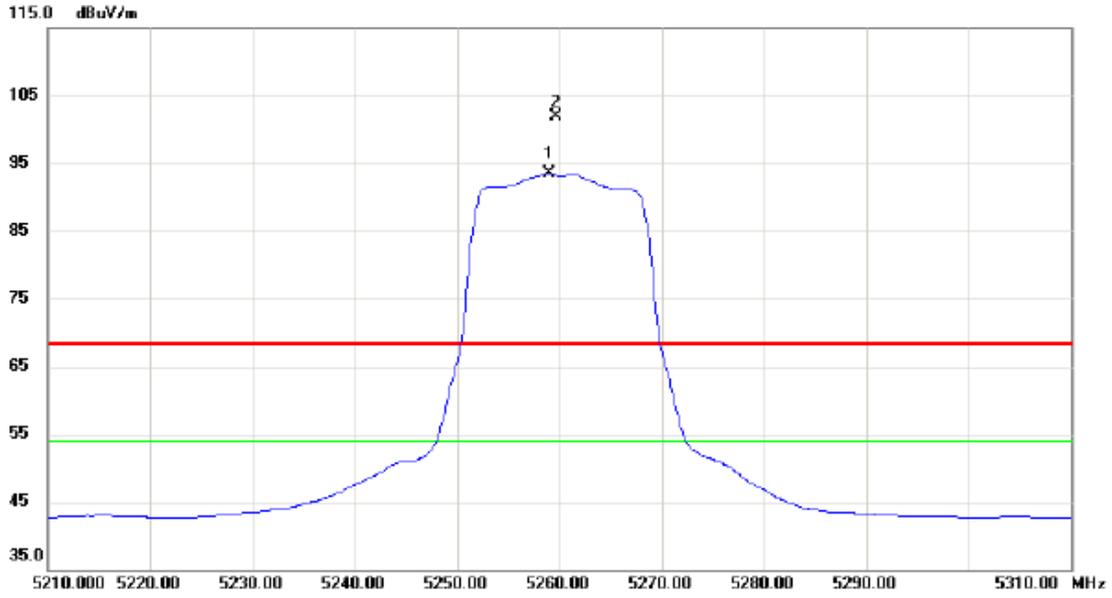


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5259.000	52.60	40.98	93.58	54.00	39.58	AVG	No Limit
2	X	5259.700	60.85	40.98	101.83	68.30	33.53	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

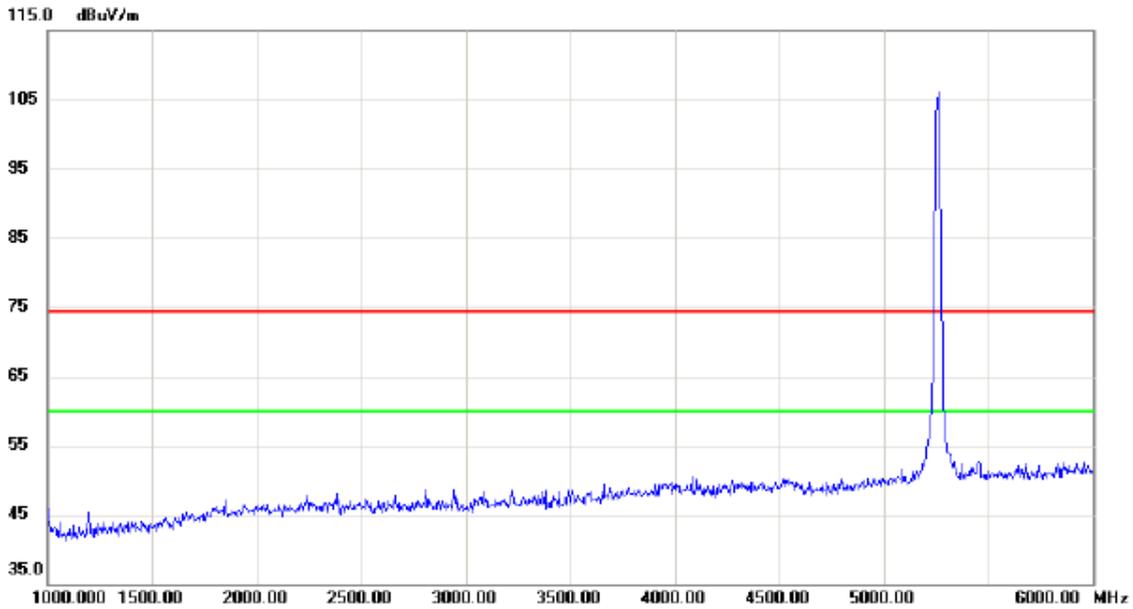


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

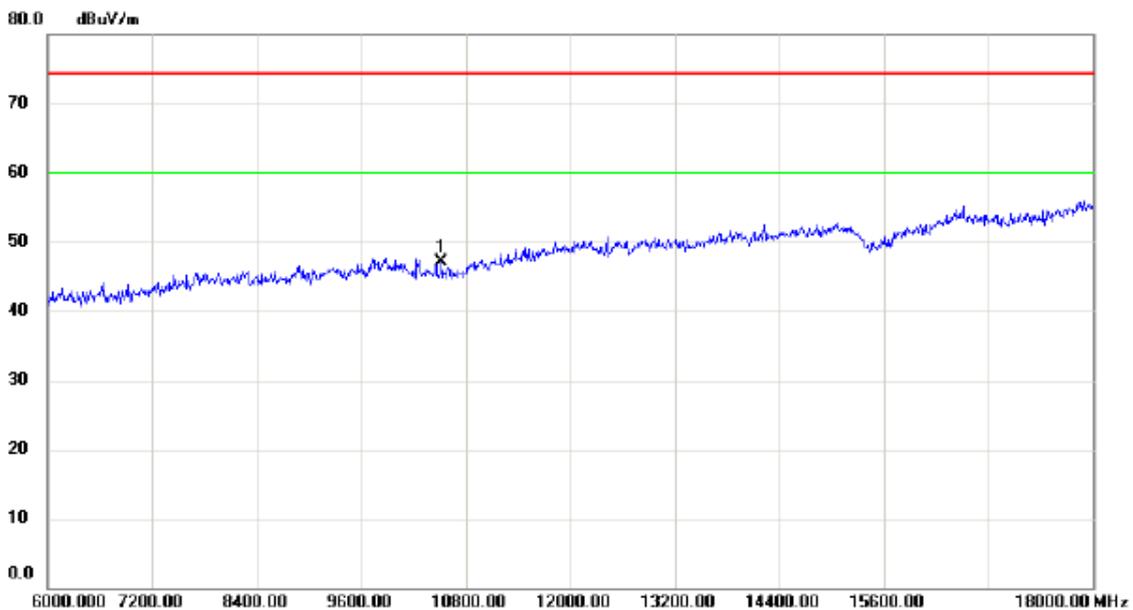


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10520.00	33.27	13.75	47.02	74.30	-27.28	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

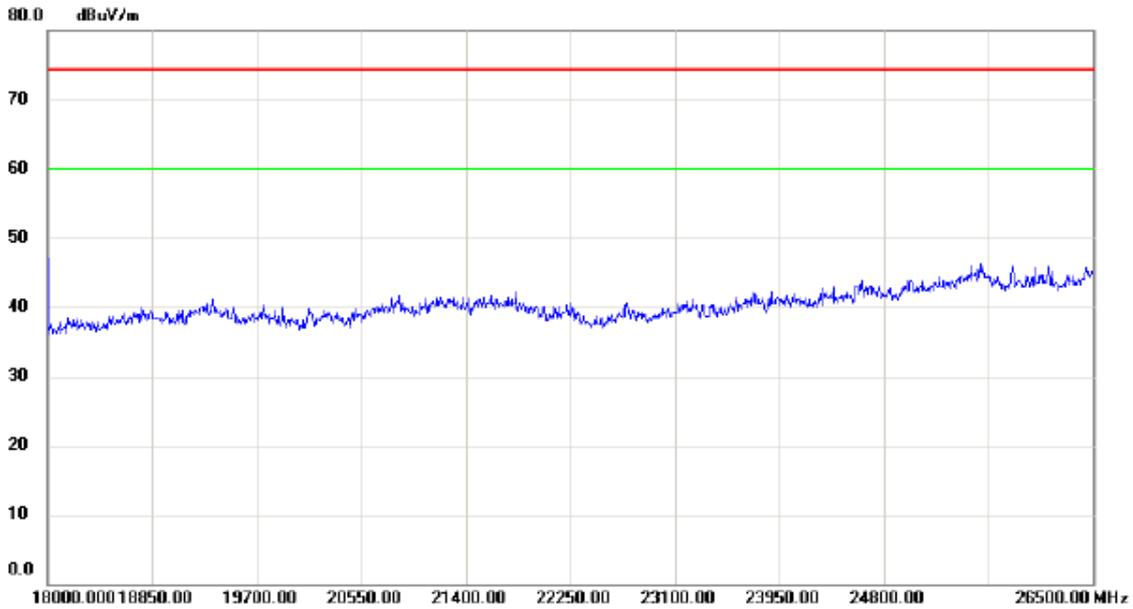


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

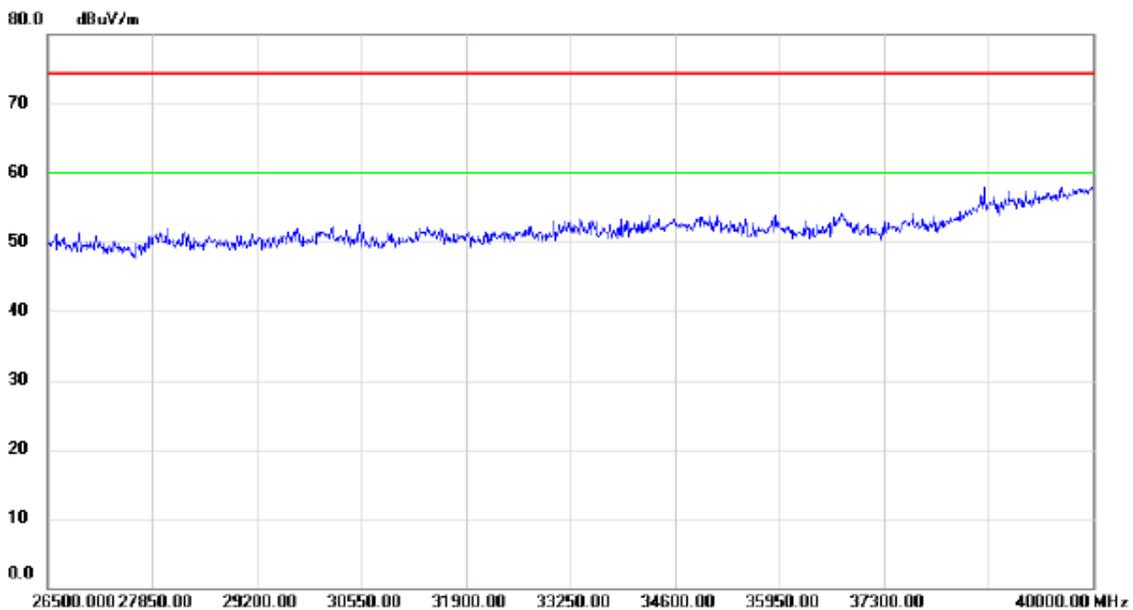

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Horizontal

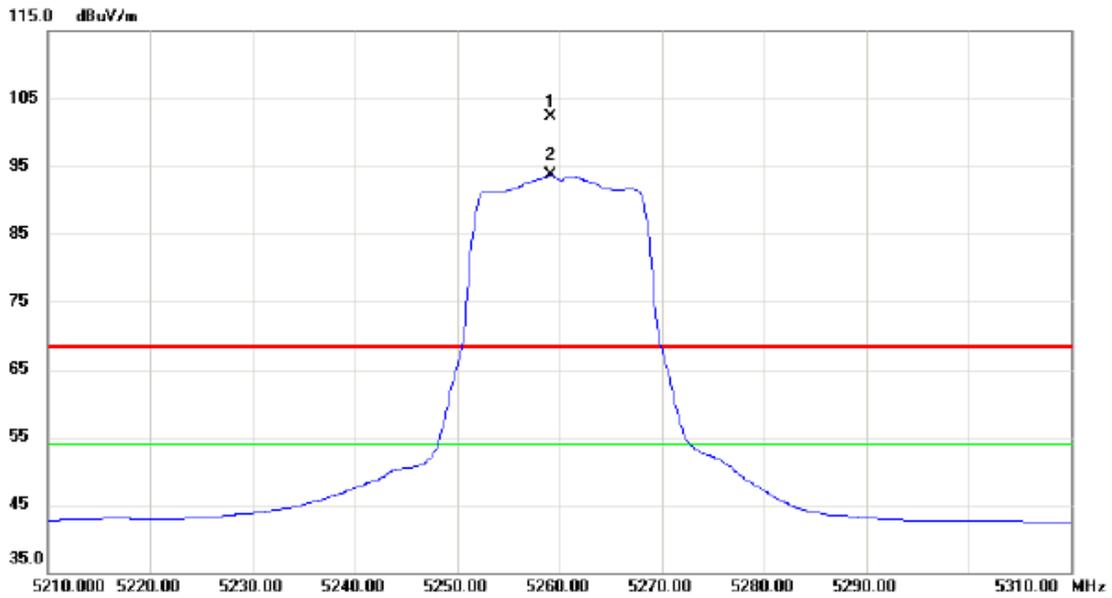


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5259.100	61.29	40.98	102.27	68.30	33.97	peak	No Limit
2	*	5259.100	52.63	40.98	93.61	54.00	39.61	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

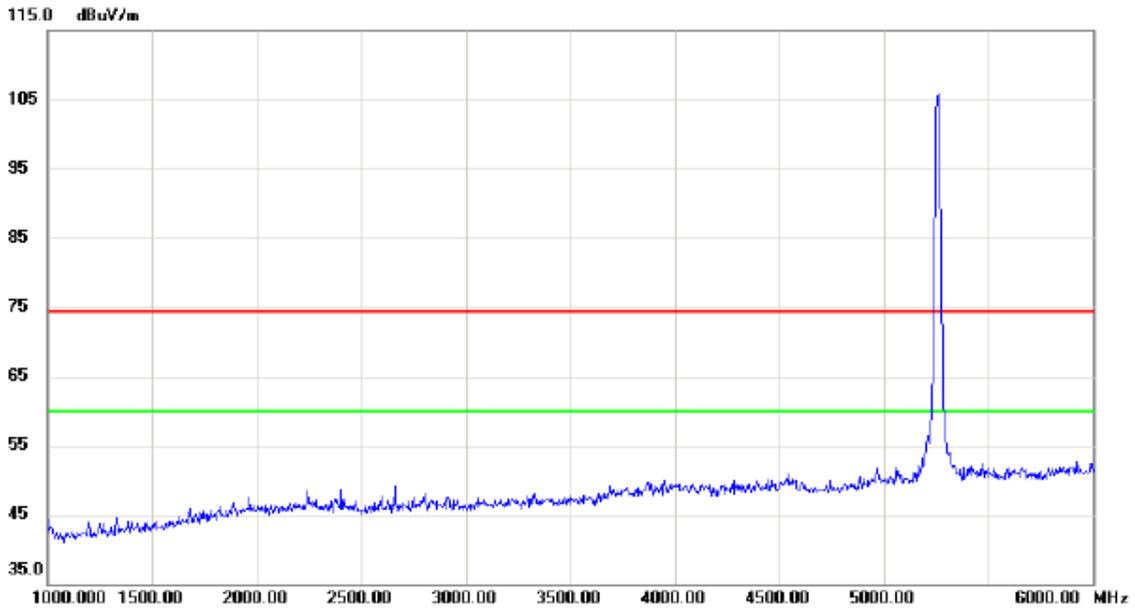


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

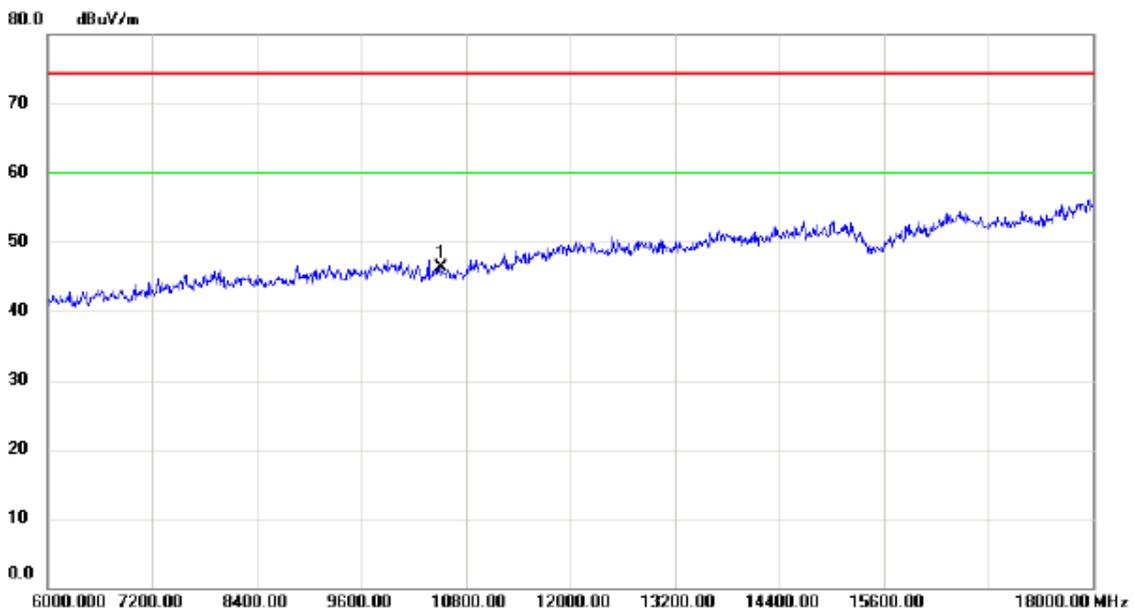


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10520.00	32.46	13.75	46.21	74.30	-28.09	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

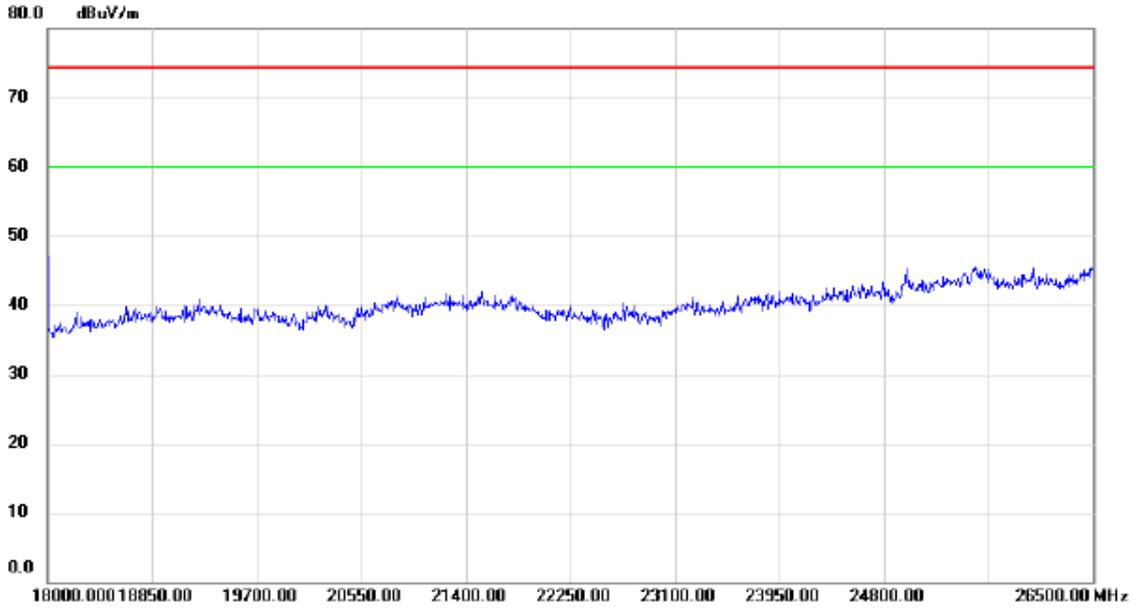


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

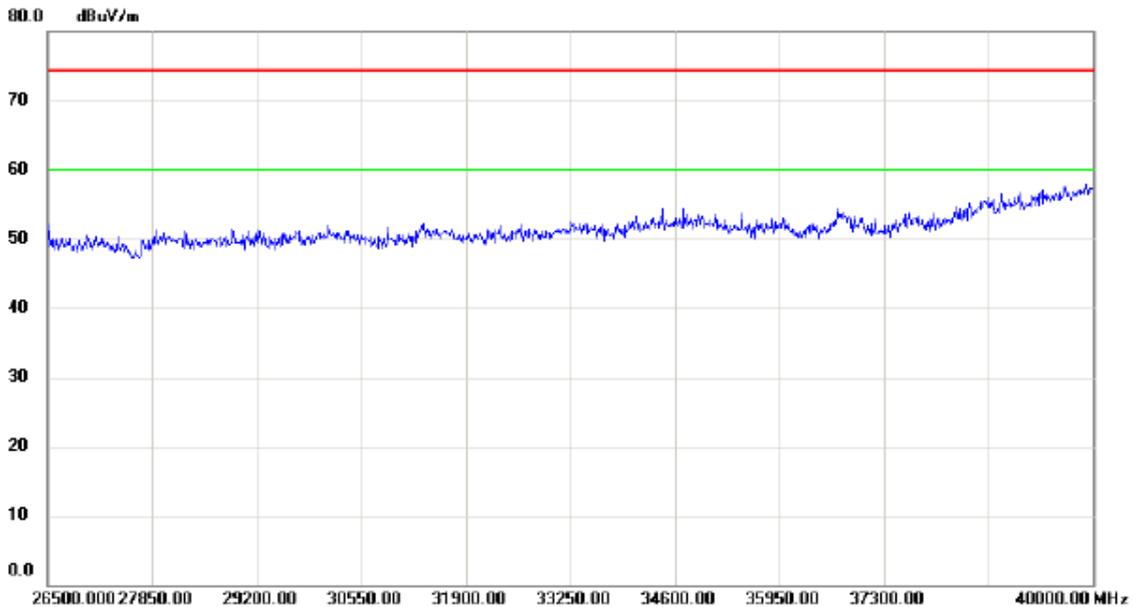

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Vertical

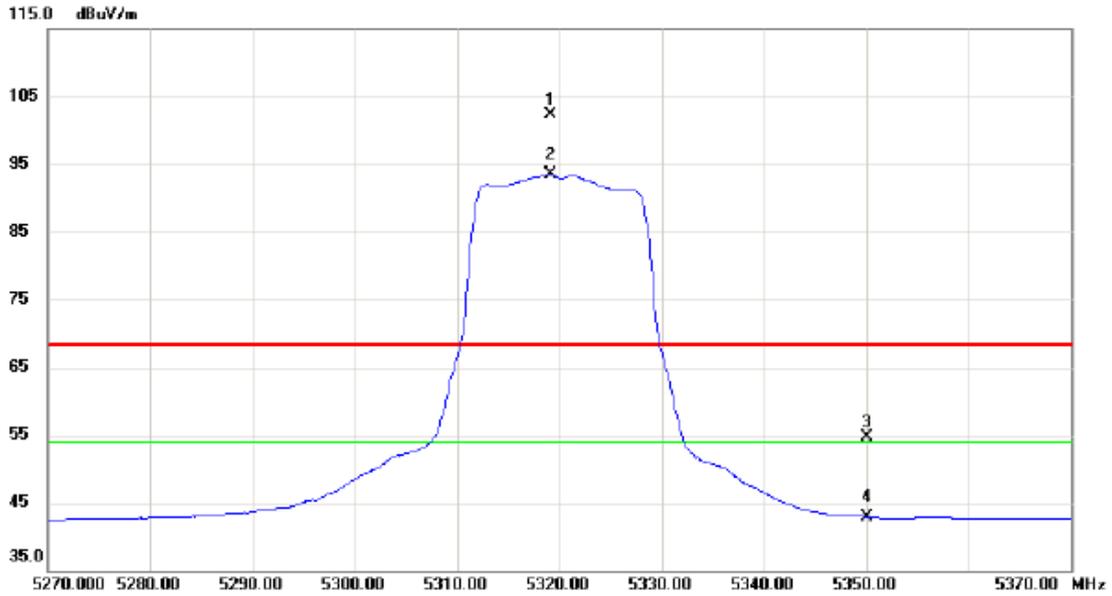


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5319.100	61.21	41.19	102.40	68.30	34.10	peak	No Limit
2	*	5319.100	52.39	41.19	93.58	54.00	39.58	AVG	No Limit
3		5350.000	13.42	41.28	54.70	68.30	-13.60	peak	
4		5350.000	1.64	41.28	42.92	54.00	-11.08	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

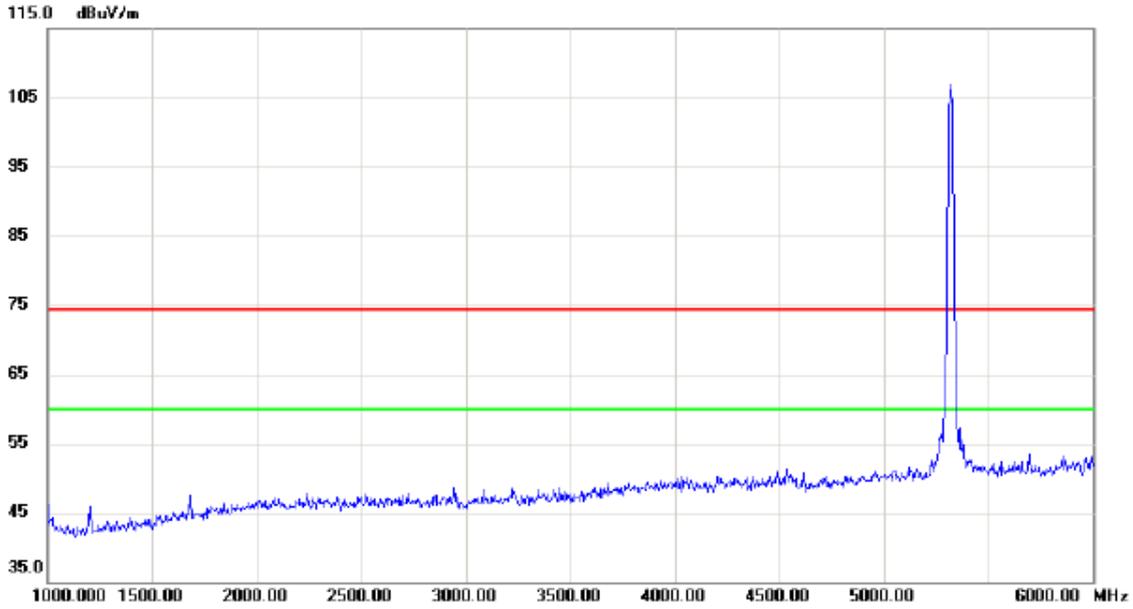


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

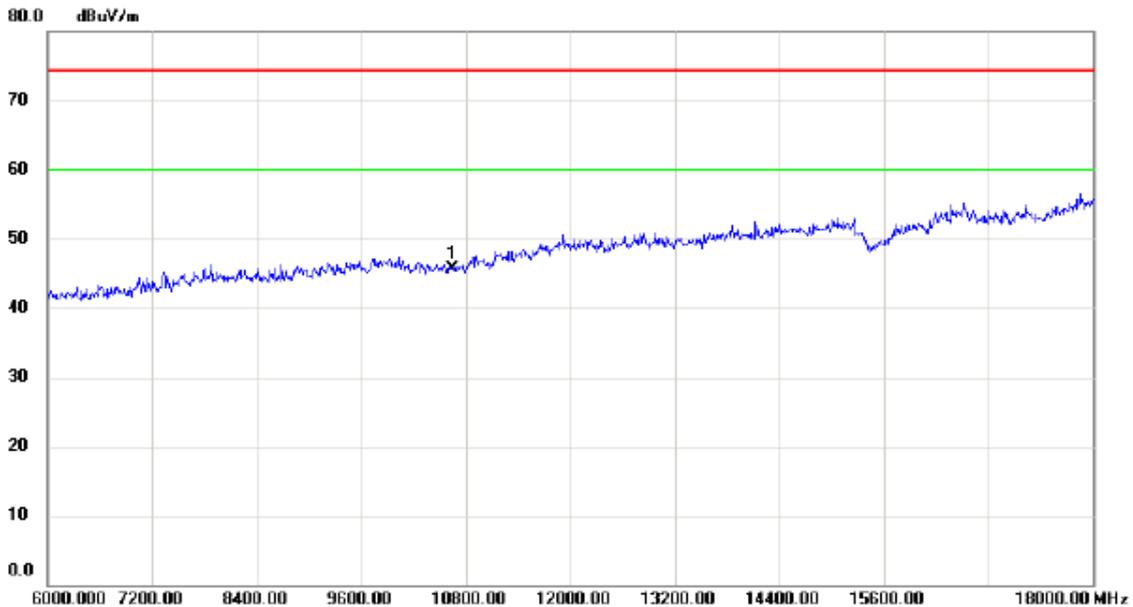


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10640.00	31.45	14.25	45.70	74.30	-28.60	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

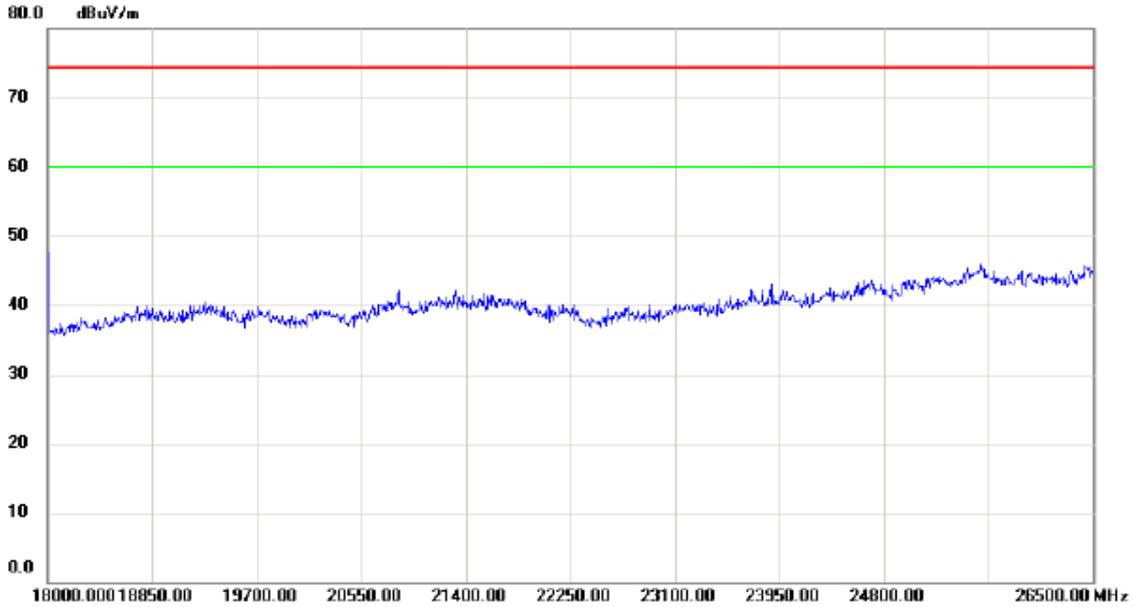


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

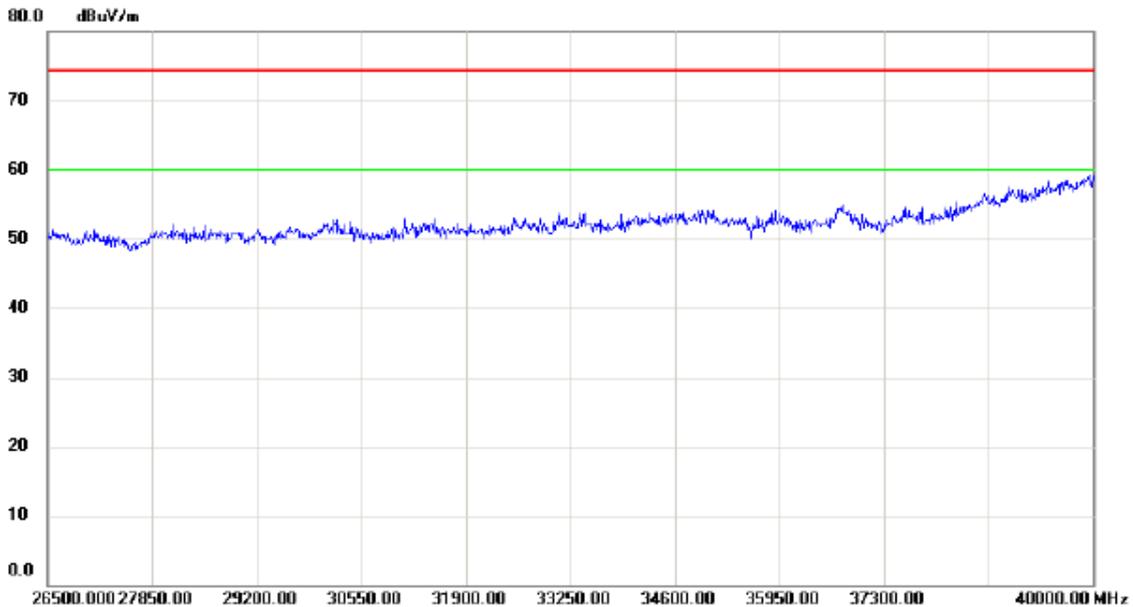

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Horizontal

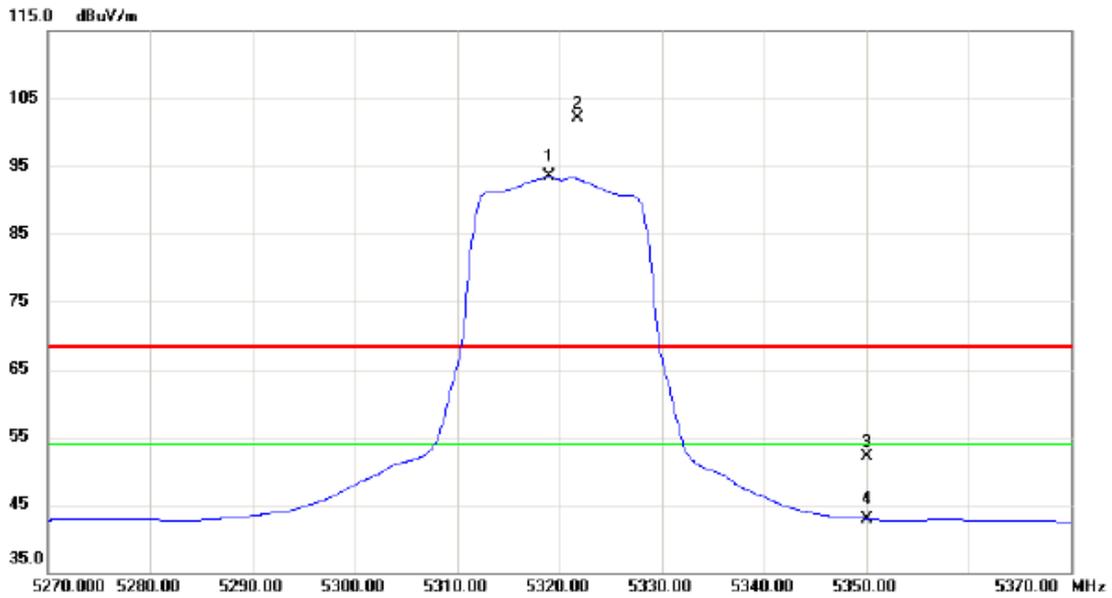


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5319.000	52.32	41.19	93.51	54.00	39.51	AVG	No Limit
2	X	5321.800	60.92	41.19	102.11	68.30	33.81	peak	No Limit
3		5350.000	10.91	41.28	52.19	68.30	-16.11	peak	
4		5350.000	1.69	41.28	42.97	54.00	-11.03	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

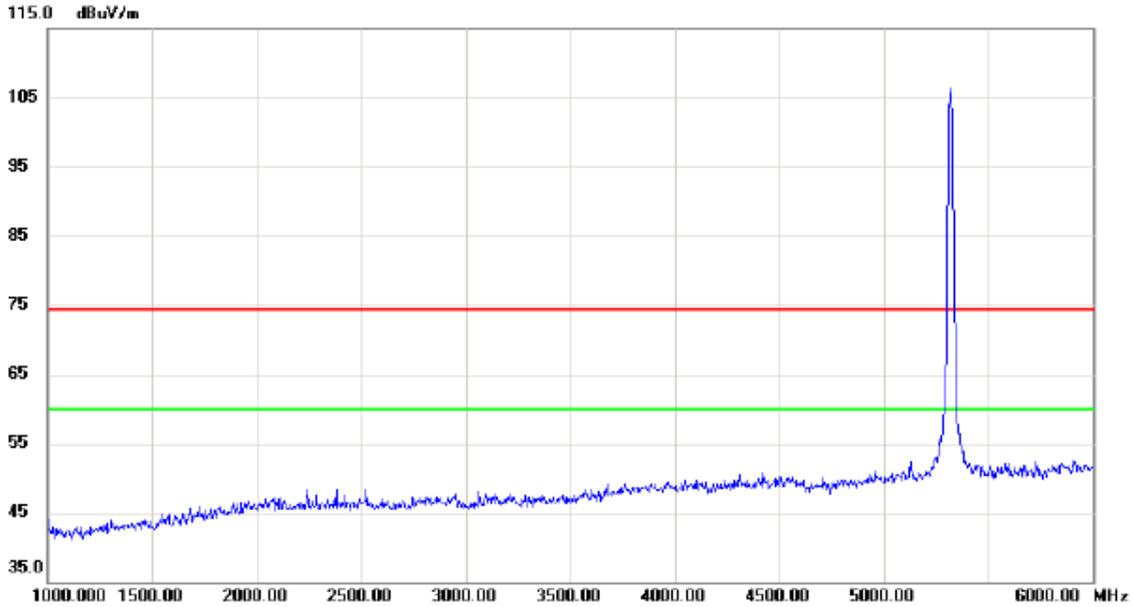


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

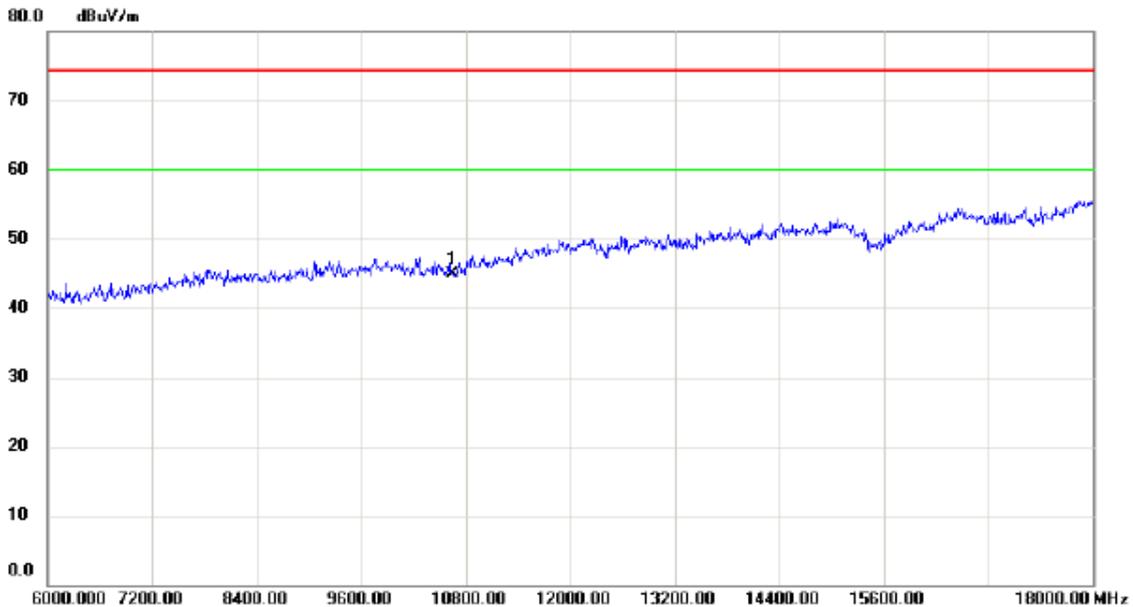


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10640.00	30.71	14.25	44.96	74.30	-29.34	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

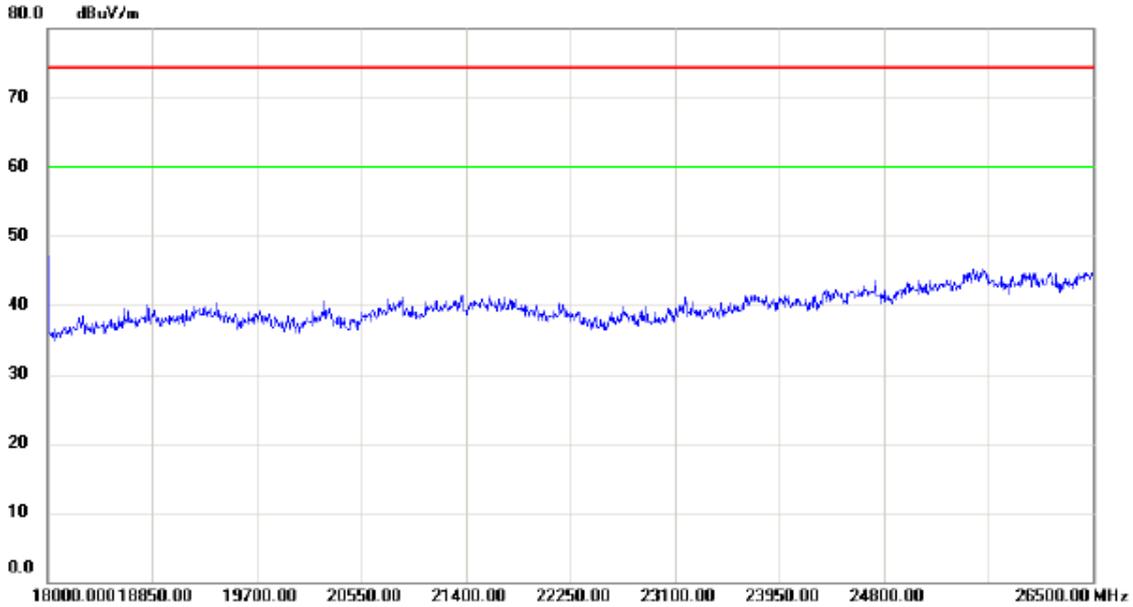


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

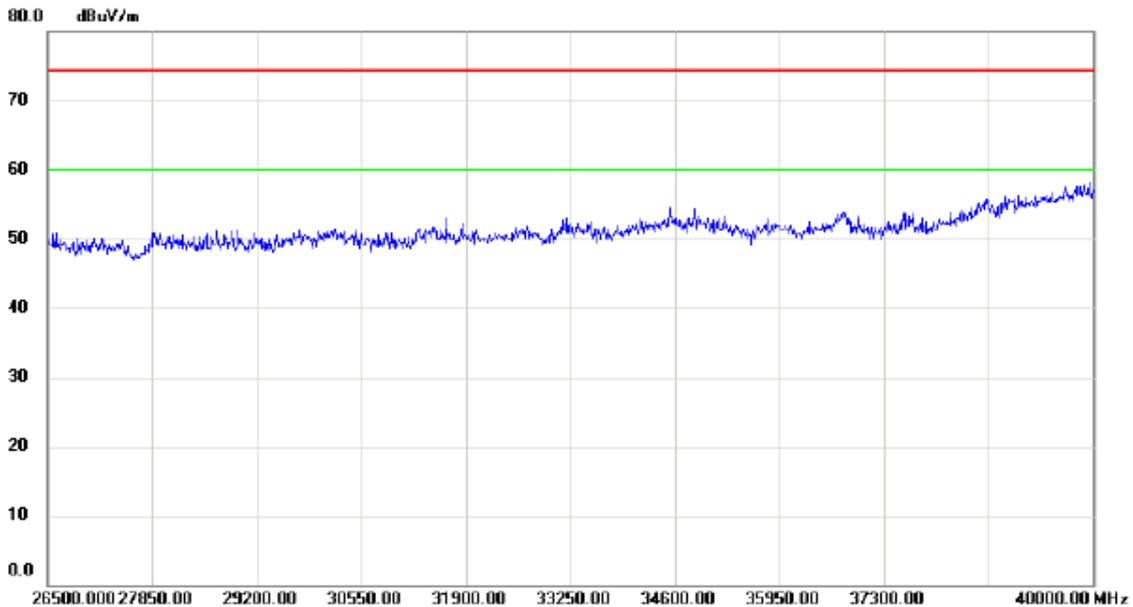

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Vertical

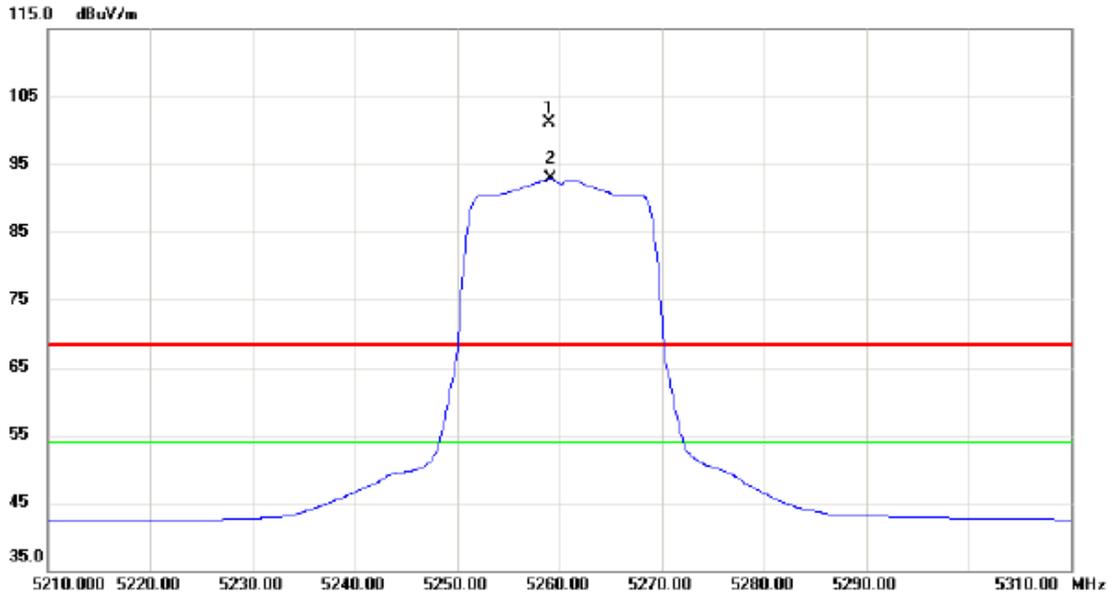


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5259.000	60.21	40.98	101.19	68.30	32.89	peak	No Limit
2	*	5259.100	51.89	40.98	92.87	54.00	38.87	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

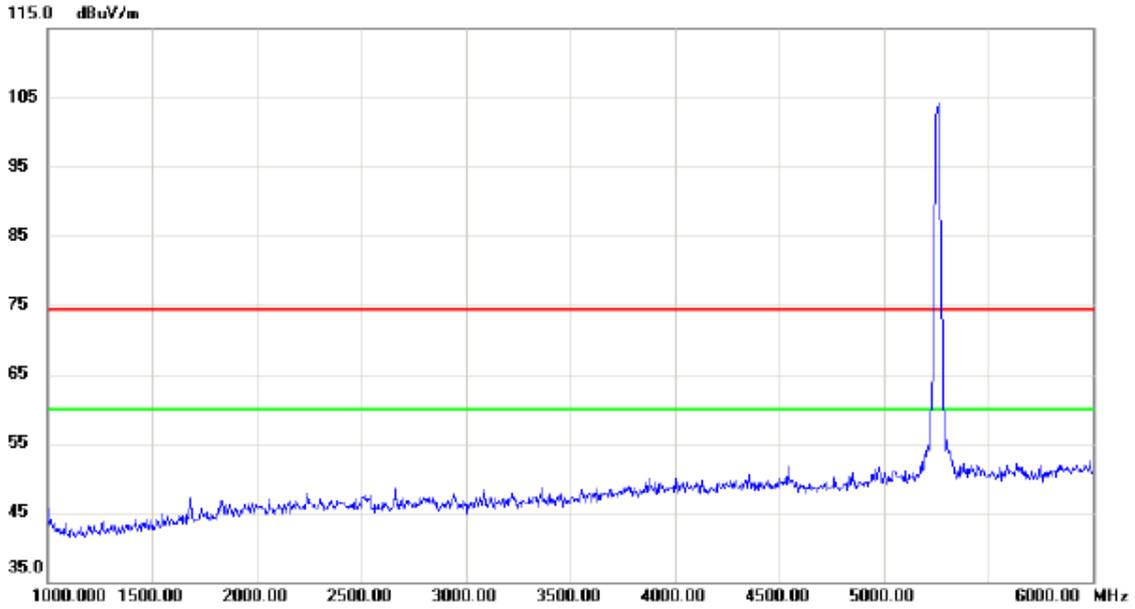


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

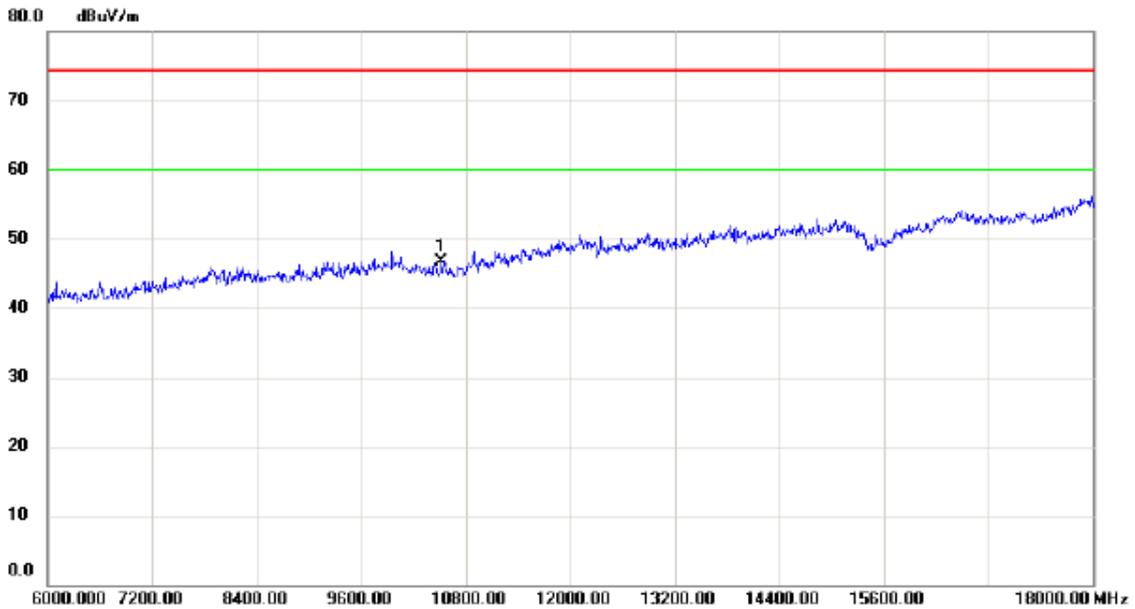


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10520.00	32.89	13.75	46.64	74.30	-27.66	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

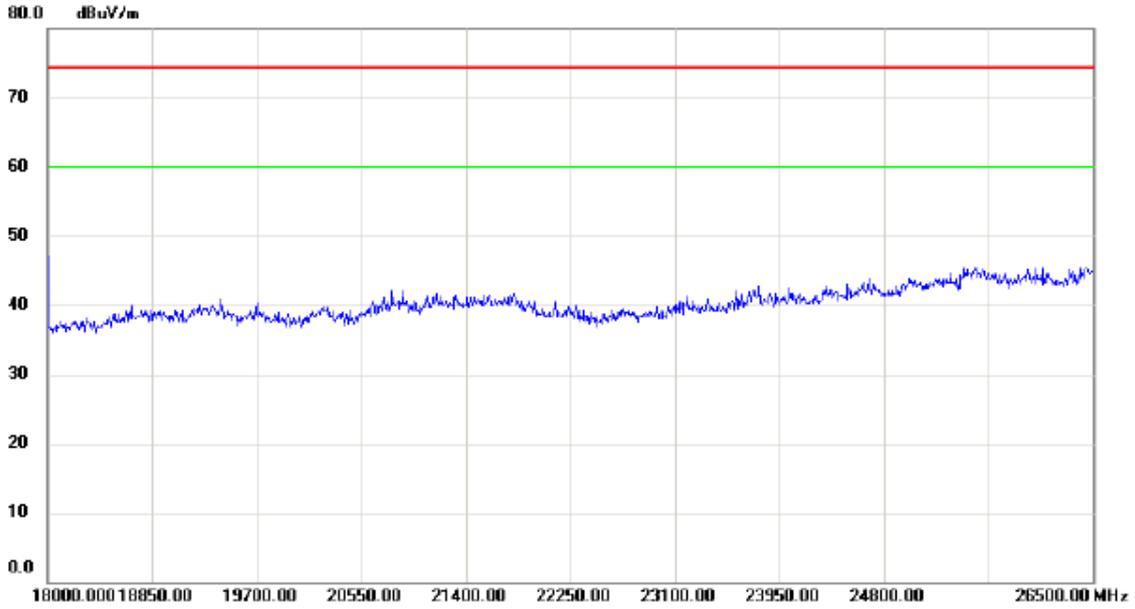


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

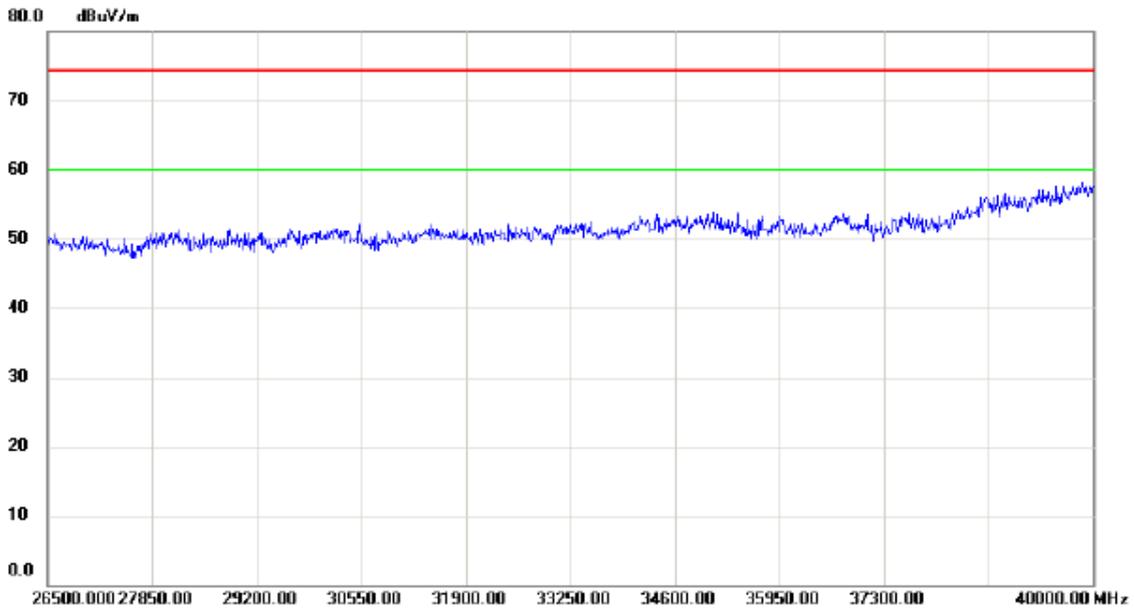

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Horizontal

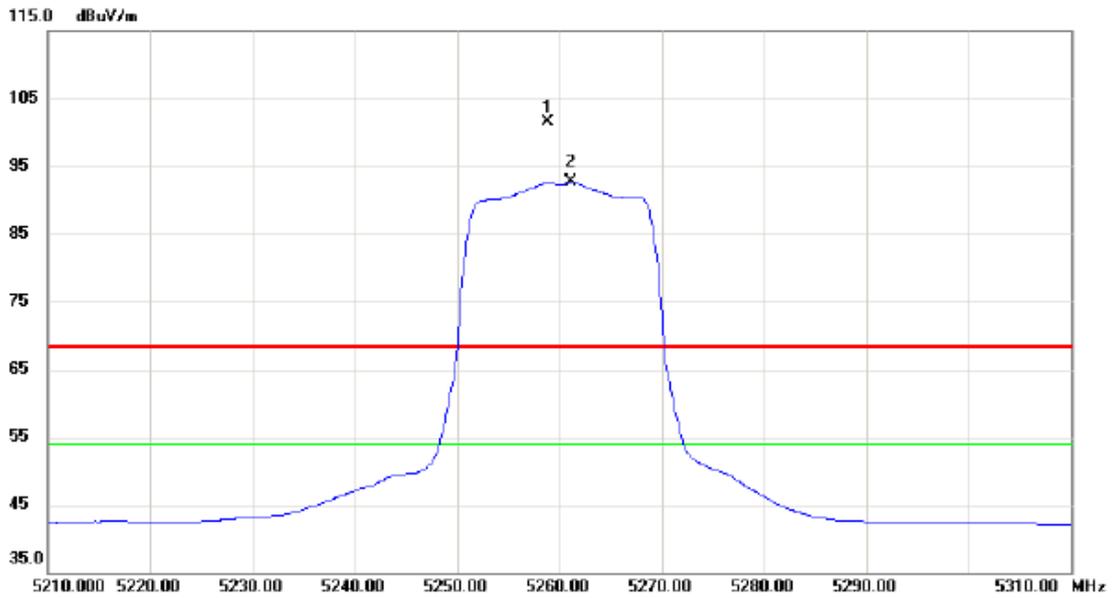


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5258.800	60.48	40.98	101.46	68.30	33.16	peak	No Limit
2	*	5261.200	51.71	41.00	92.71	54.00	38.71	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

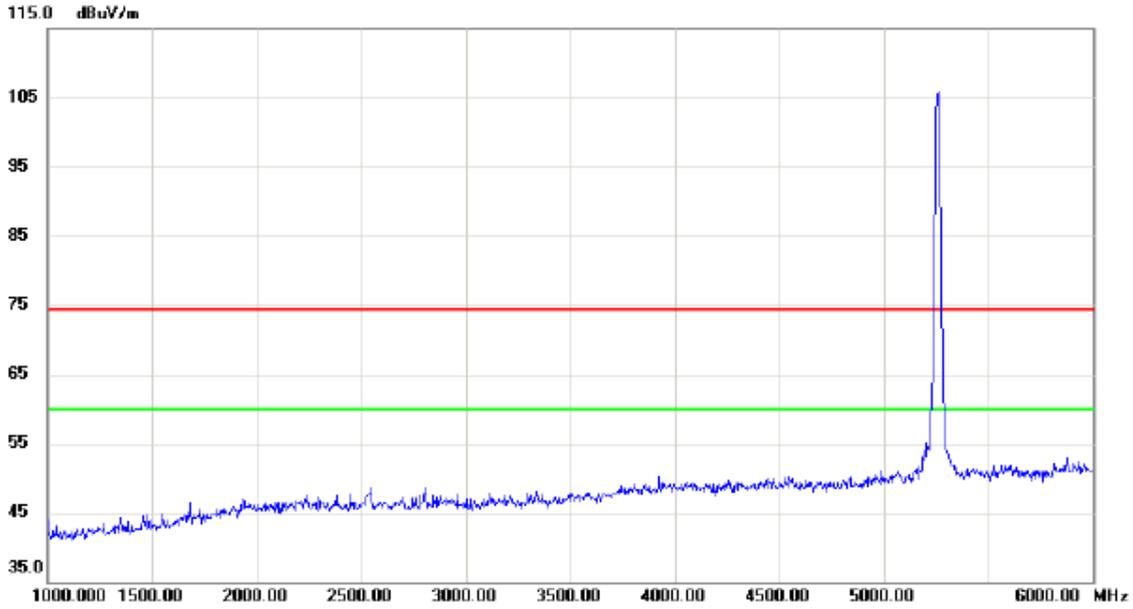


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

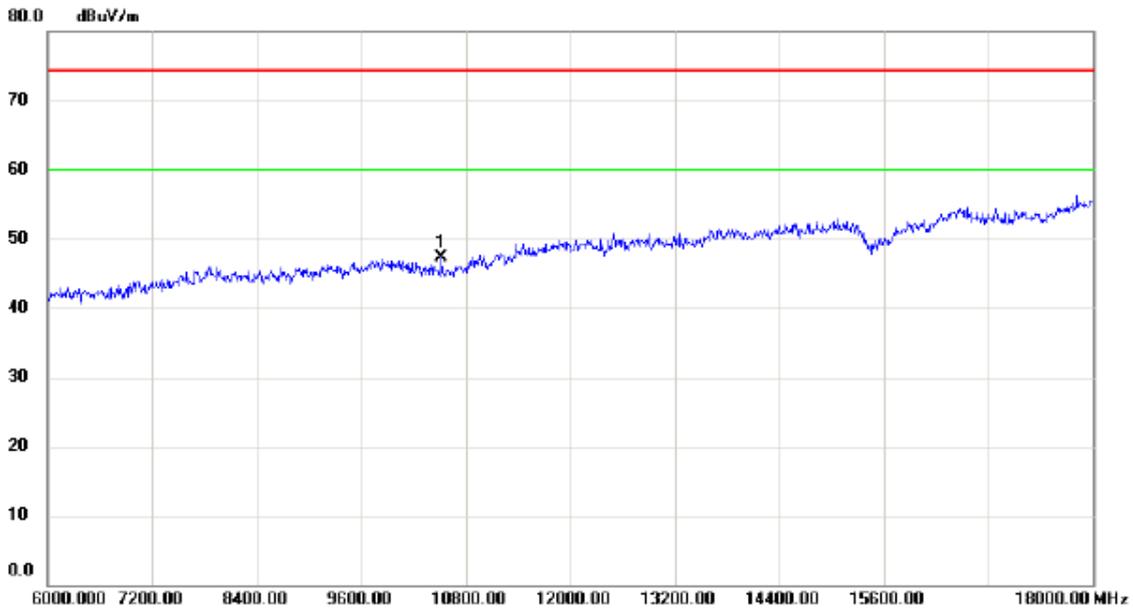


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10520.00	33.52	13.75	47.27	74.30	-27.03	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

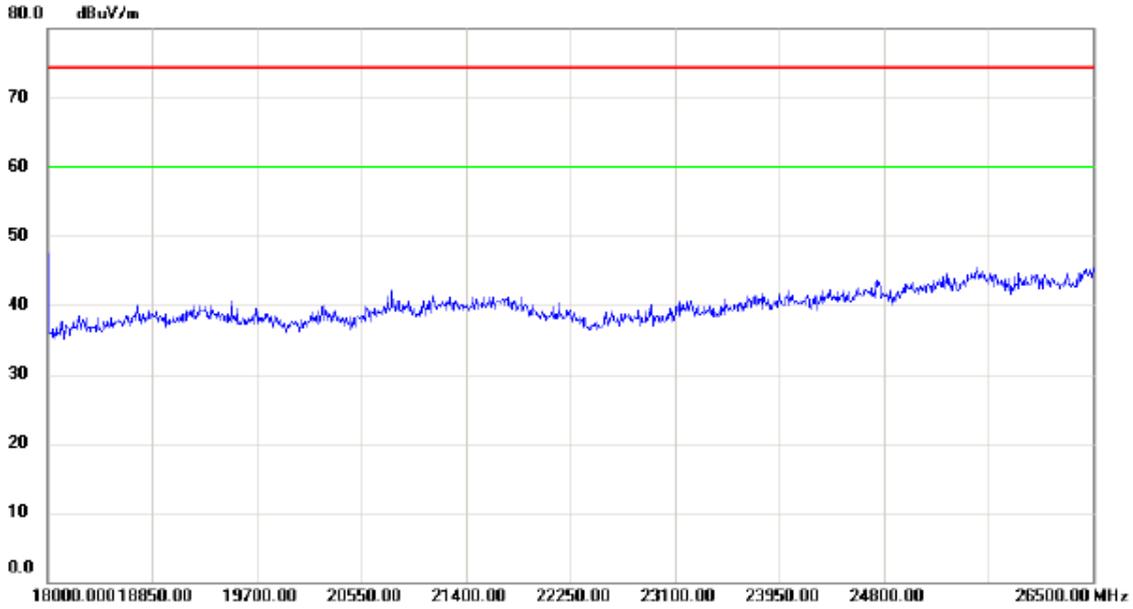


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

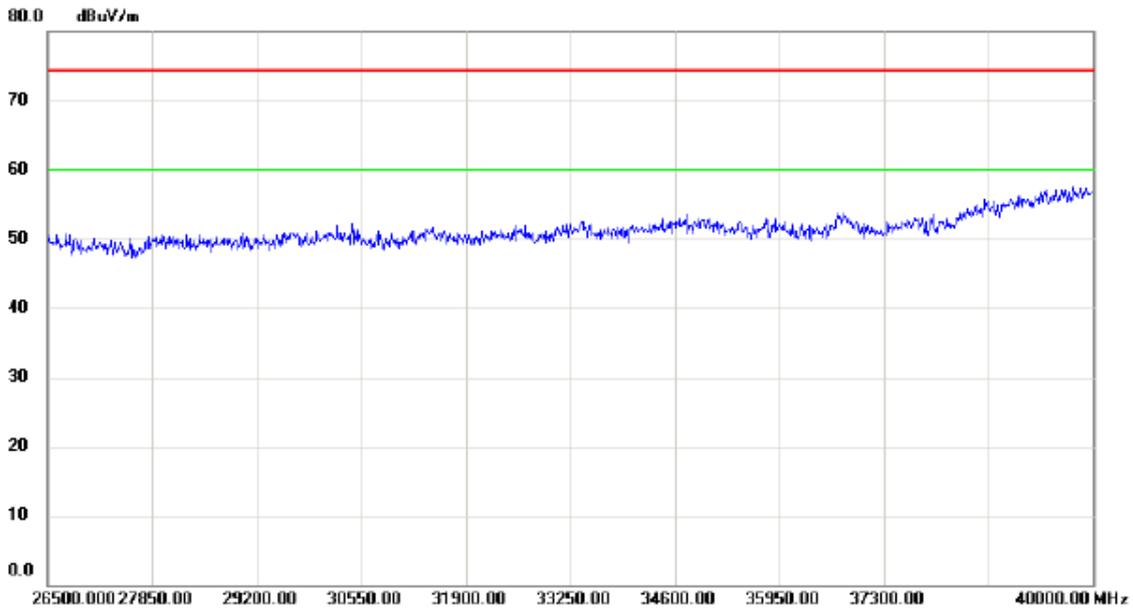

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Vertical

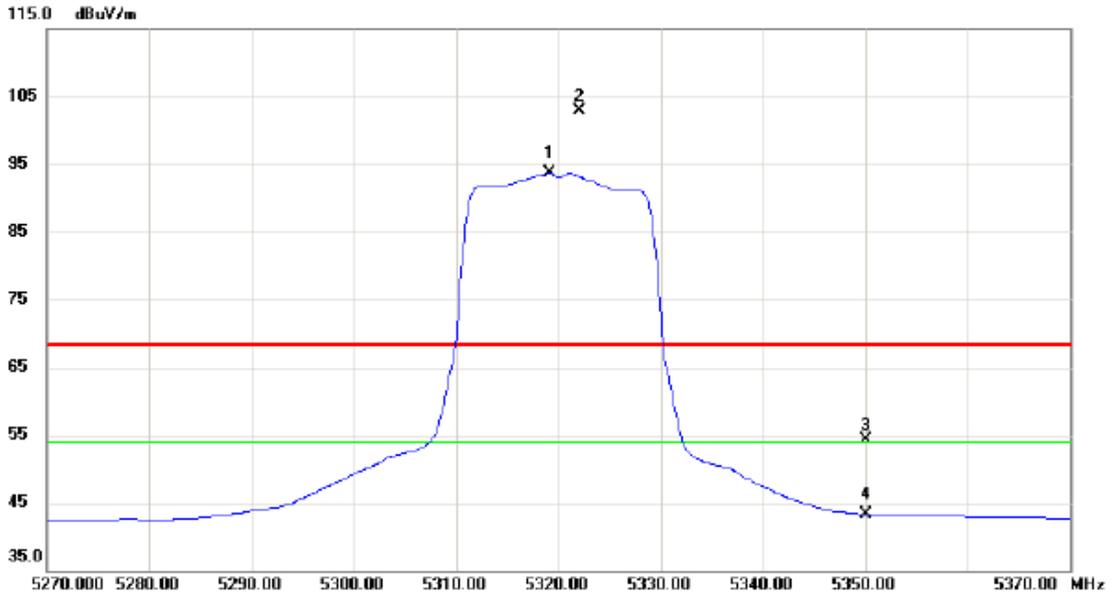


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5319.100	52.52	41.19	93.71	54.00	39.71	AVG	No Limit
2	X	5322.000	61.78	41.19	102.97	68.30	34.67	peak	No Limit
3		5350.000	12.97	41.28	54.25	68.30	-14.05	peak	
4		5350.000	2.02	41.28	43.30	54.00	-10.70	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

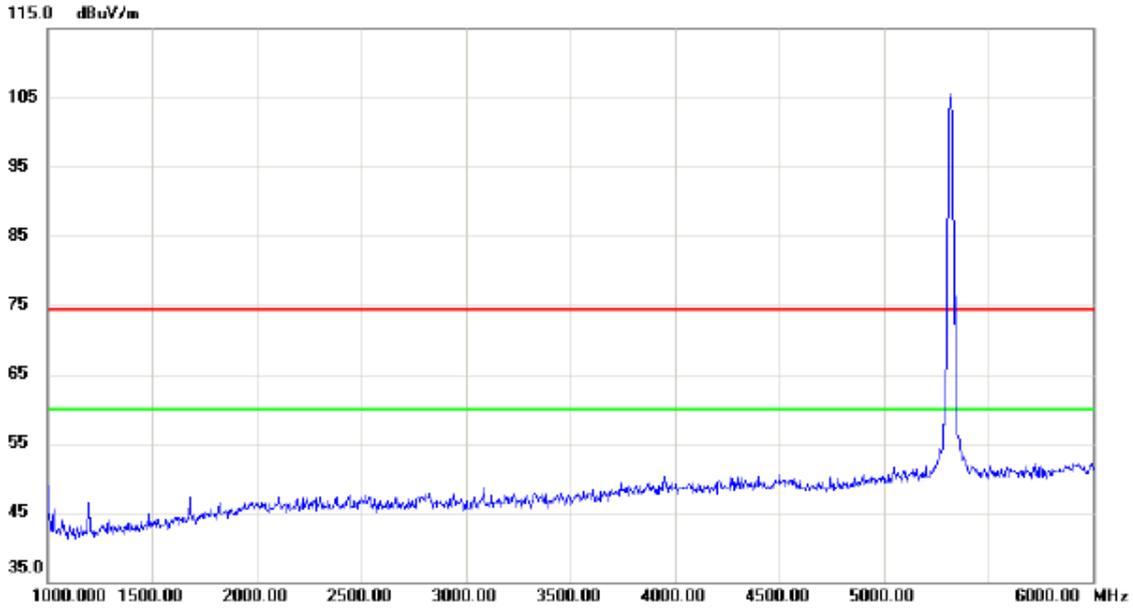


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

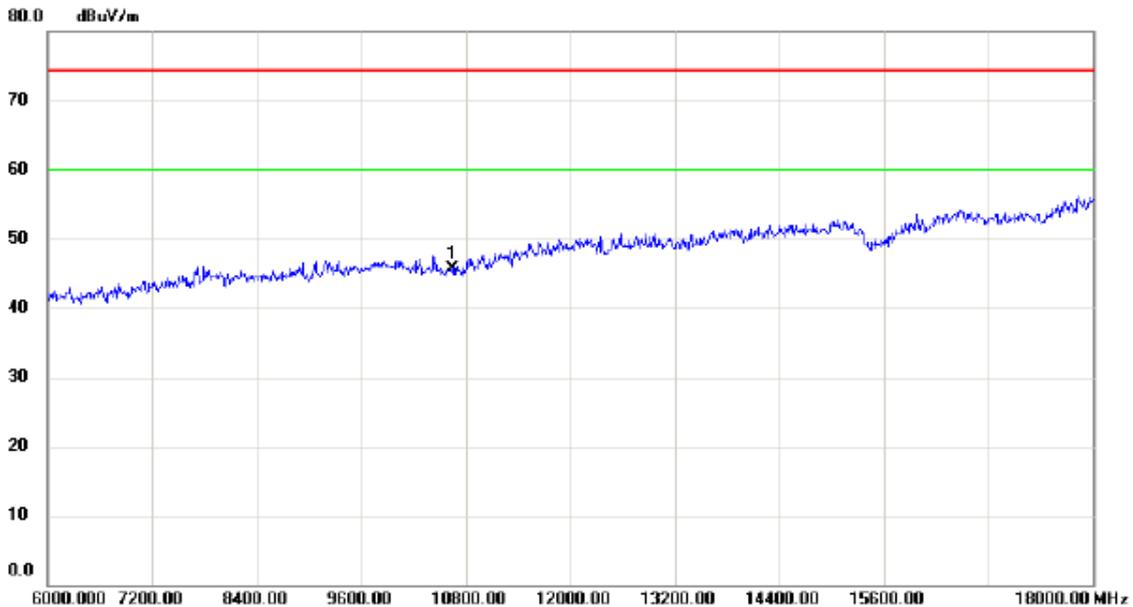


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10640.00	31.36	14.25	45.61	74.30	-28.69	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

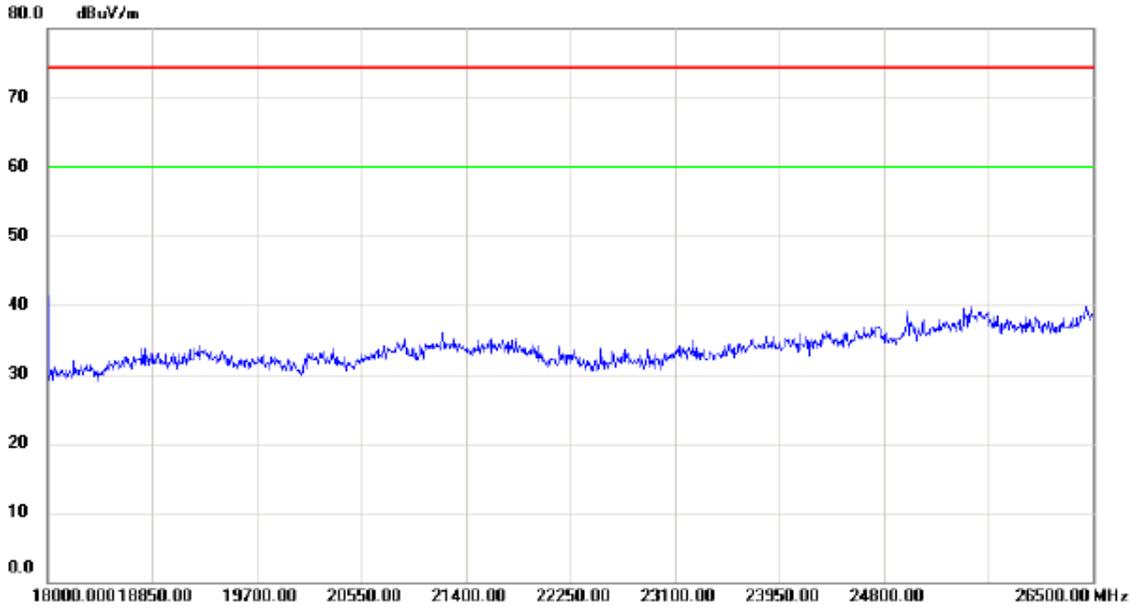


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

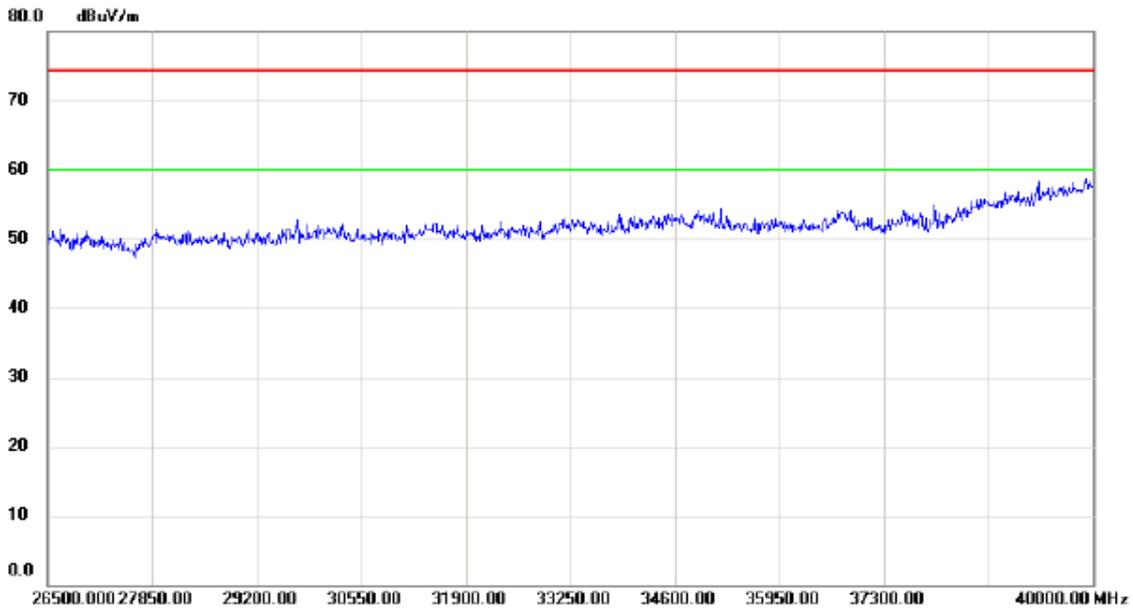

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Horizontal

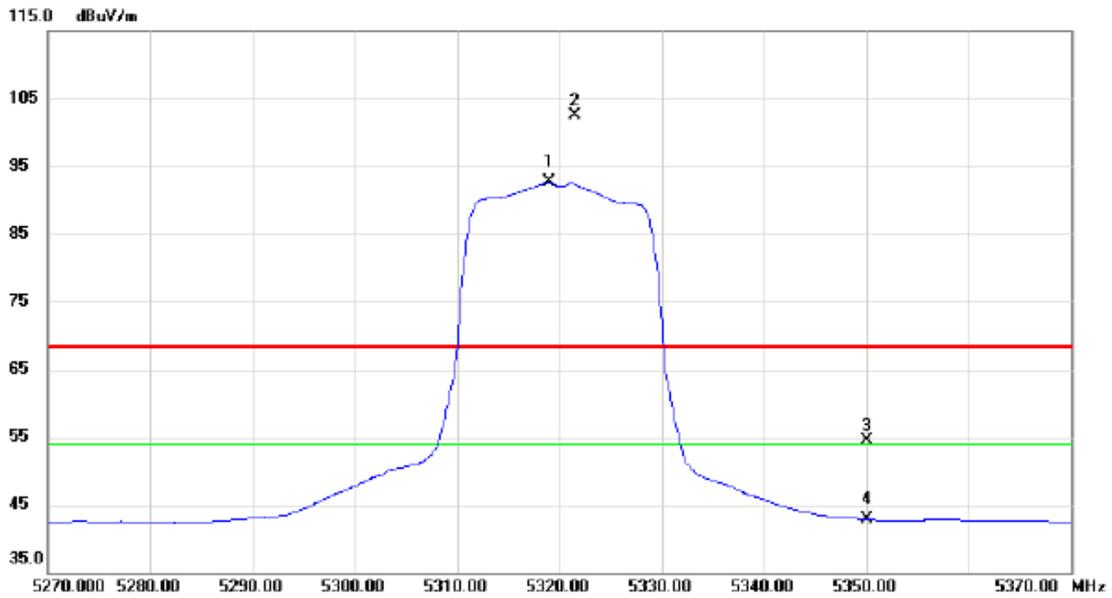


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5319.000	51.43	41.19	92.62	54.00	38.62	AVG	No Limit
2	X	5321.500	61.24	41.19	102.43	68.30	34.13	peak	No Limit
3		5350.000	13.27	41.28	54.55	68.30	-13.75	peak	
4		5350.000	1.61	41.28	42.89	54.00	-11.11	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal

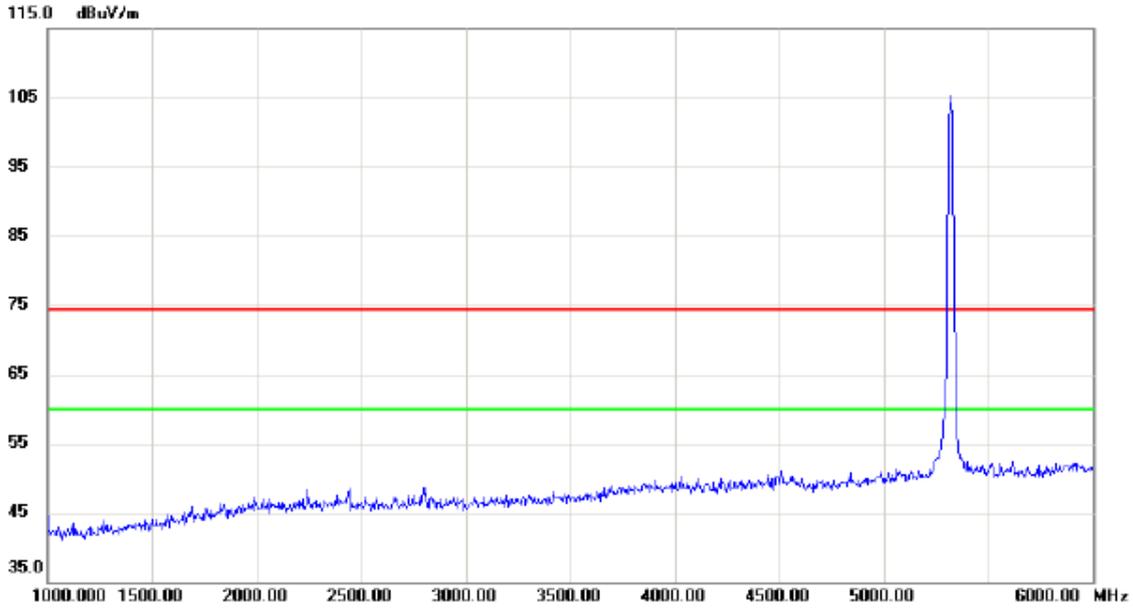


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

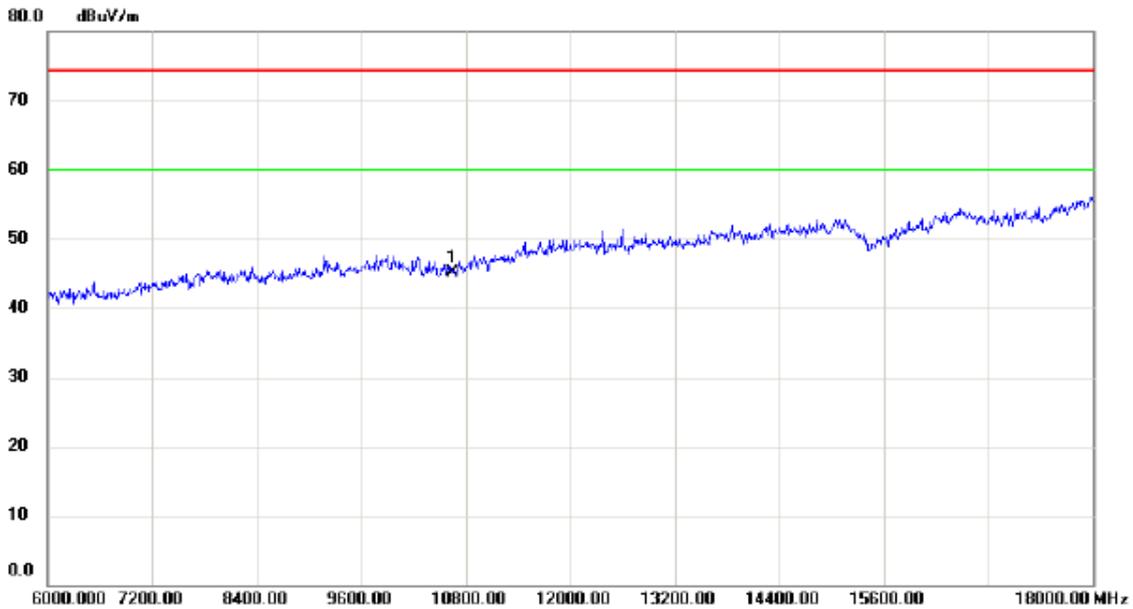


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10640.00	30.88	14.25	45.13	74.30	-29.17	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal

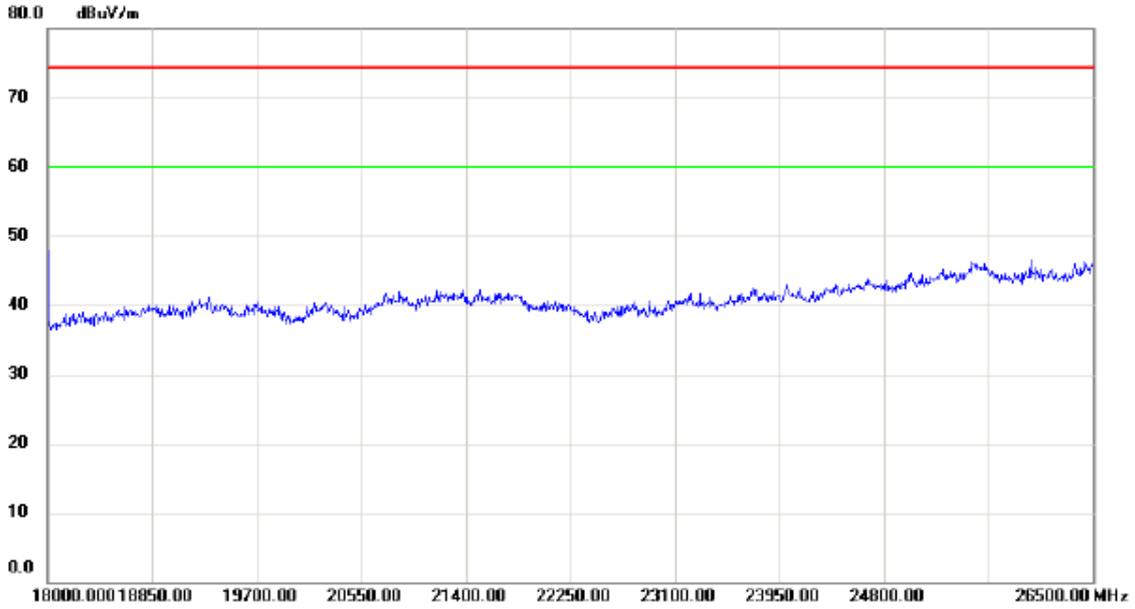


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

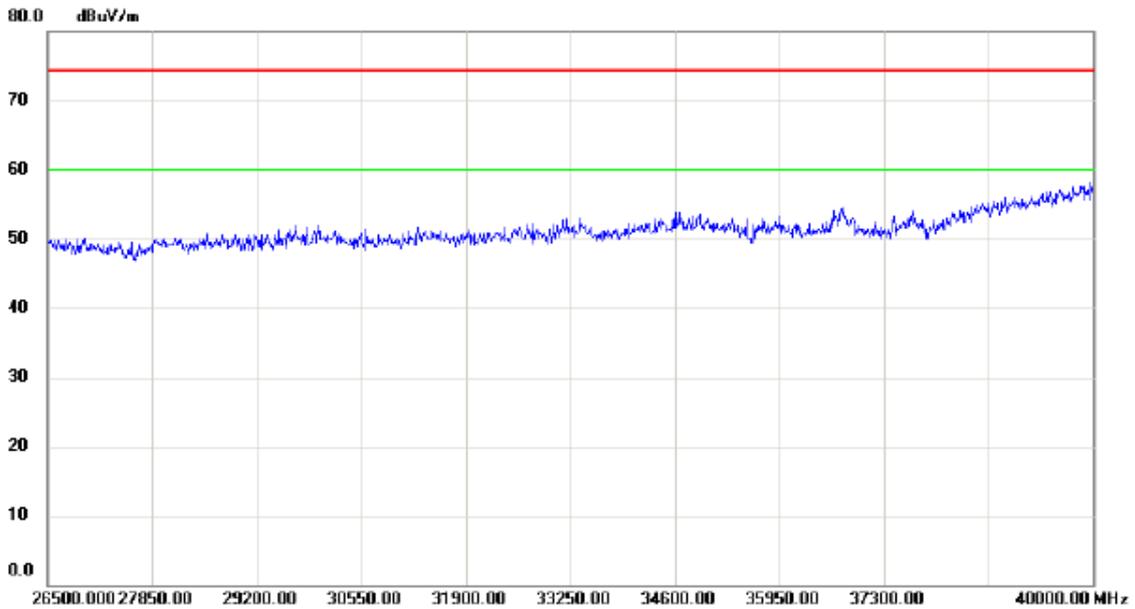

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Vertical

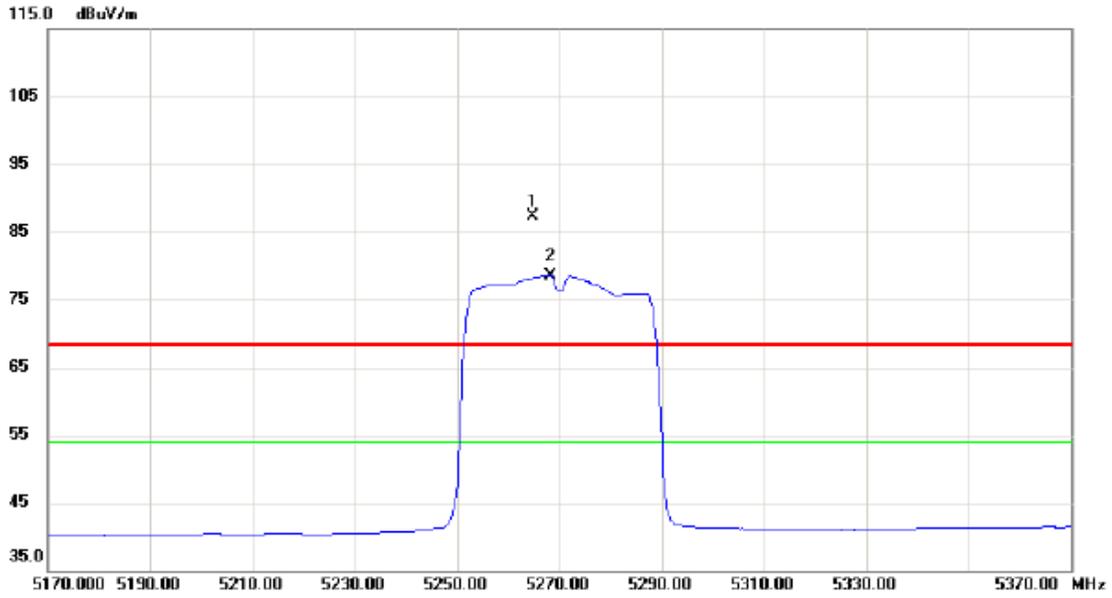


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5264.800	46.20	41.01	87.21	68.30	18.91	peak	No Limit
2	*	5268.200	37.54	41.01	78.55	54.00	24.55	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

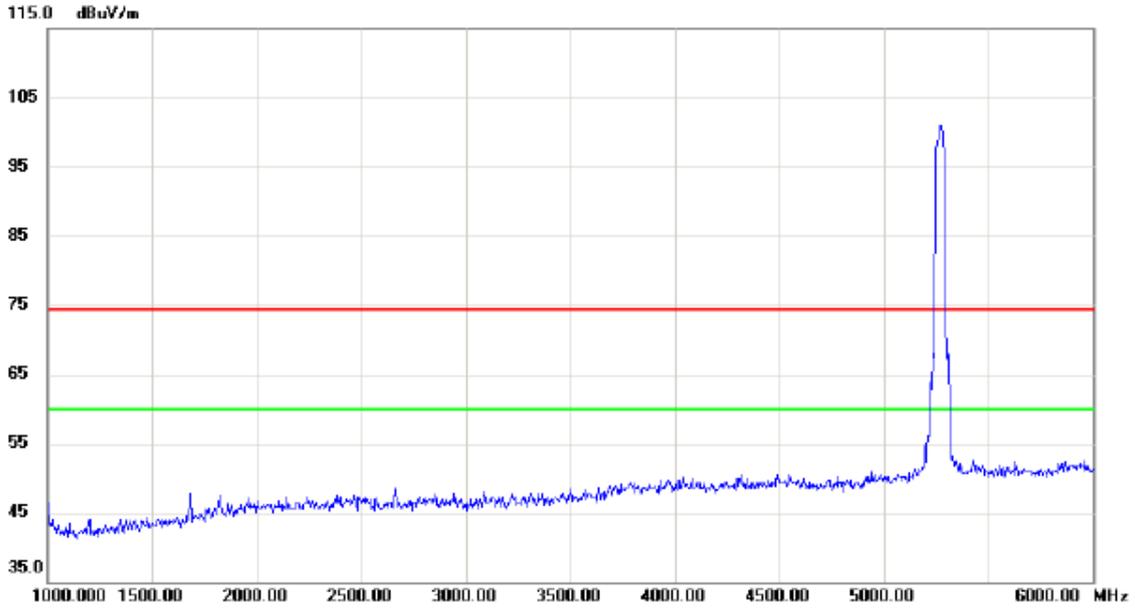


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

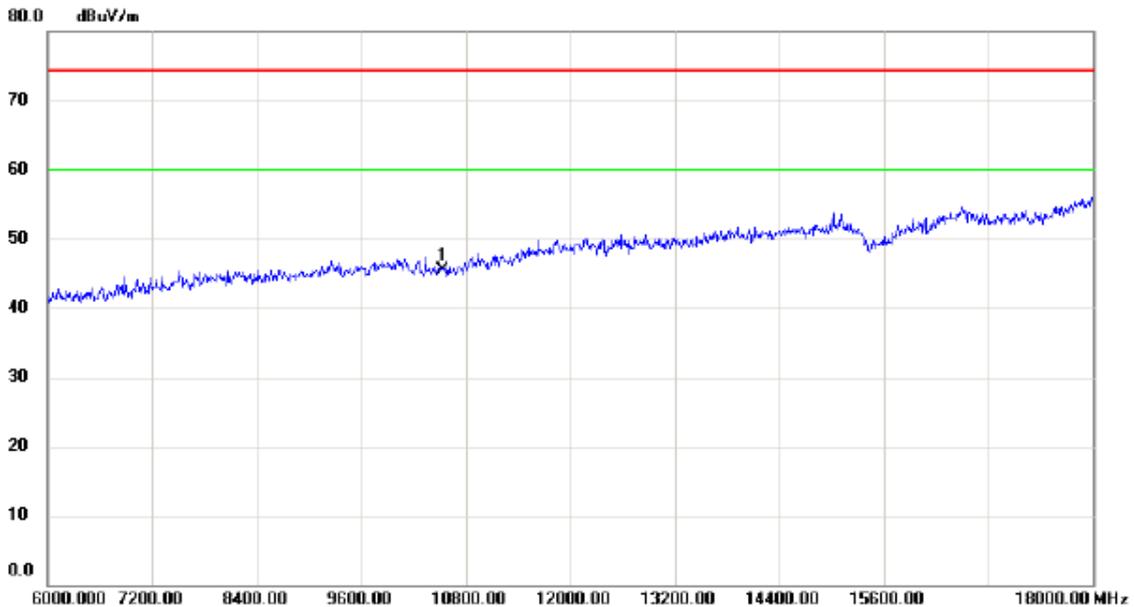


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10540.00	31.62	13.84	45.46	74.30	-28.84	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

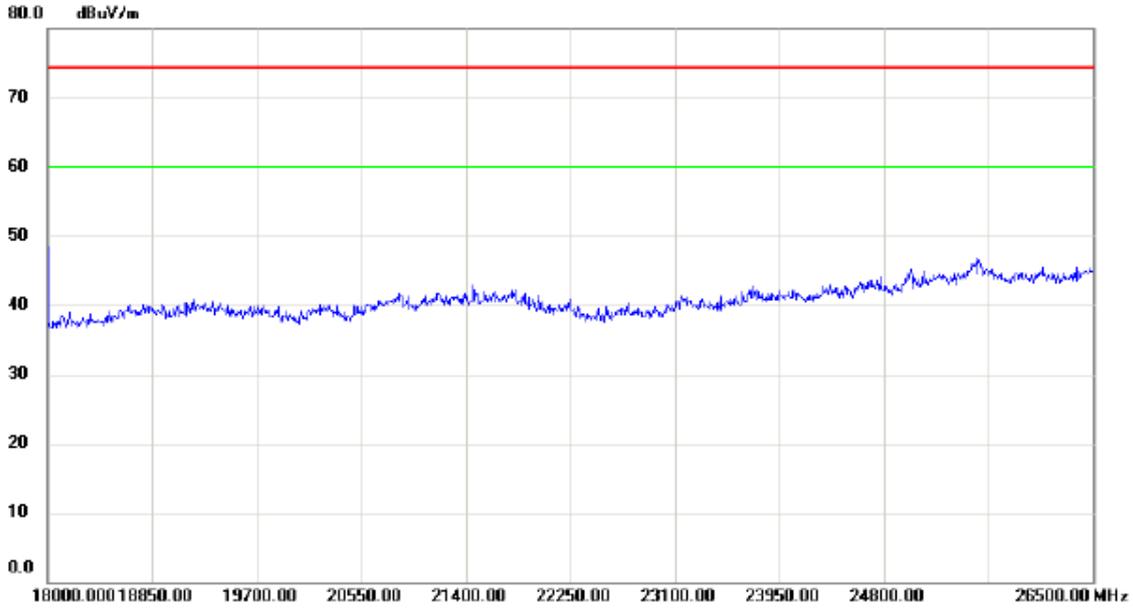


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

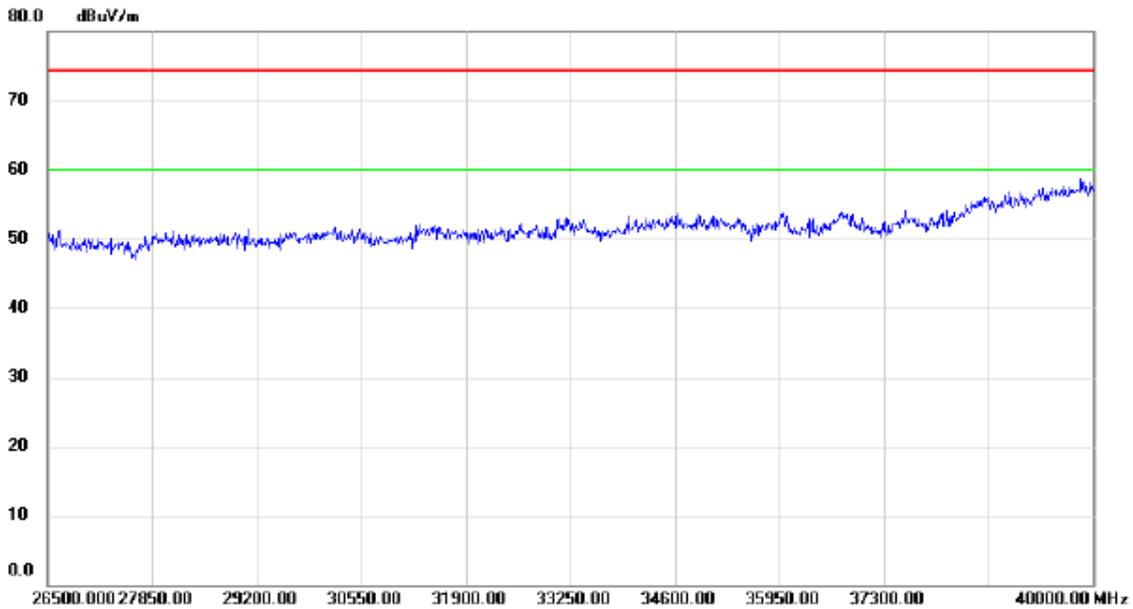

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Horizontal

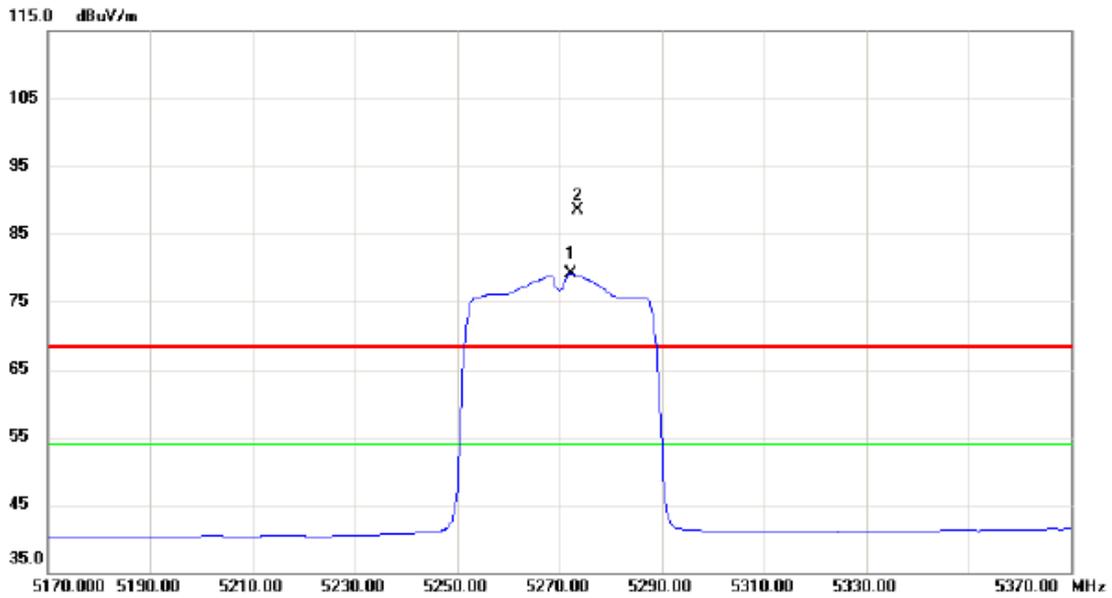


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5272.200	38.12	41.02	79.14	54.00	25.14	AVG	No Limit
2	X	5273.600	47.43	41.04	88.47	68.30	20.17	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

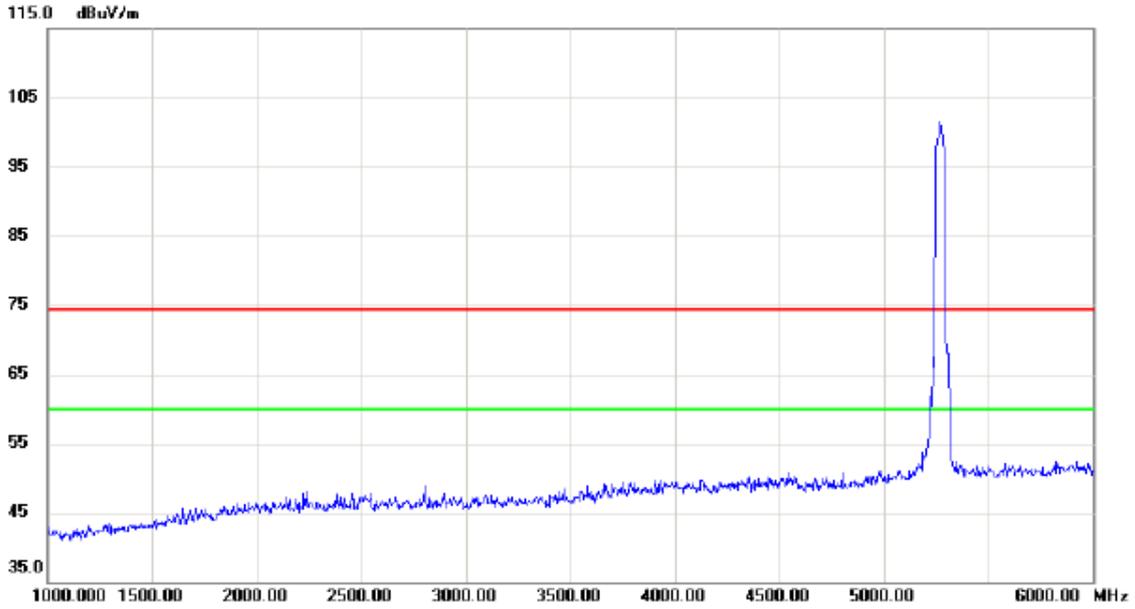


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

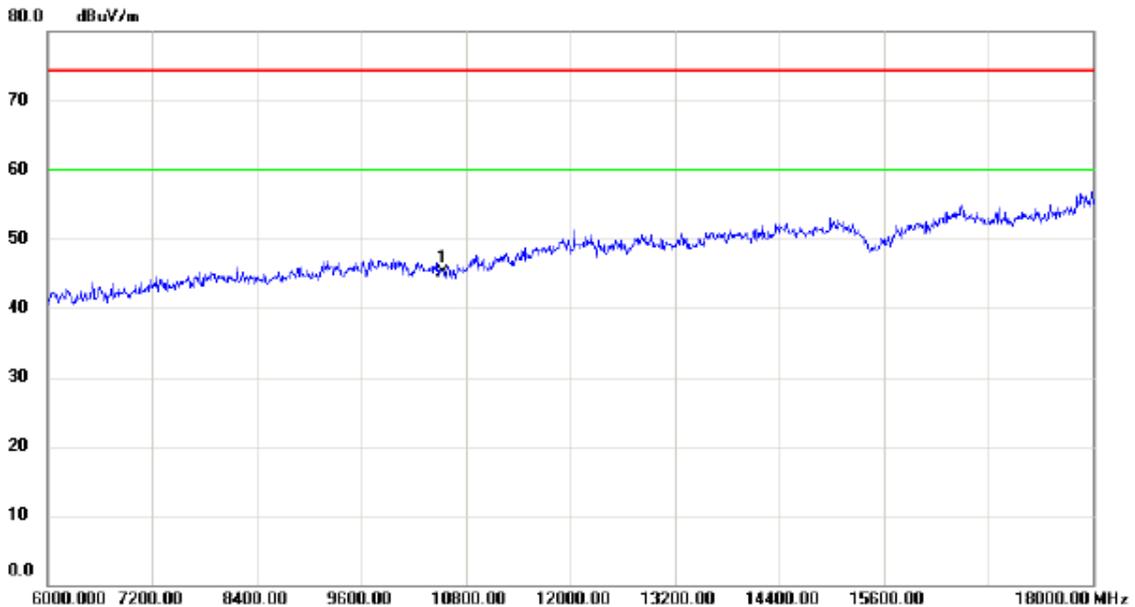


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10540.00	31.24	13.84	45.08	74.30	-29.22	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

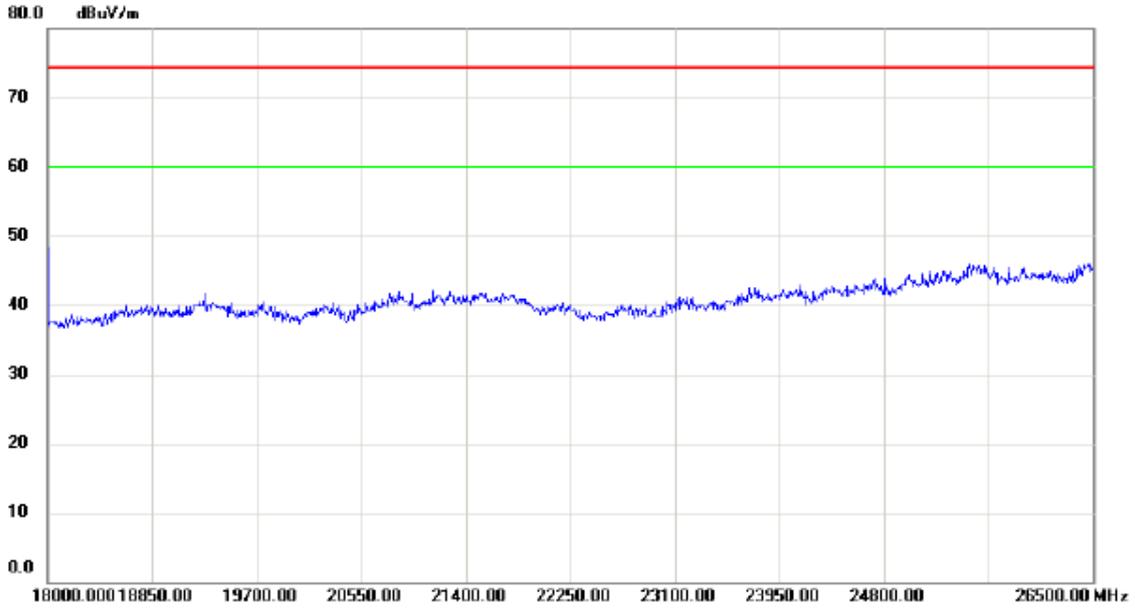


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

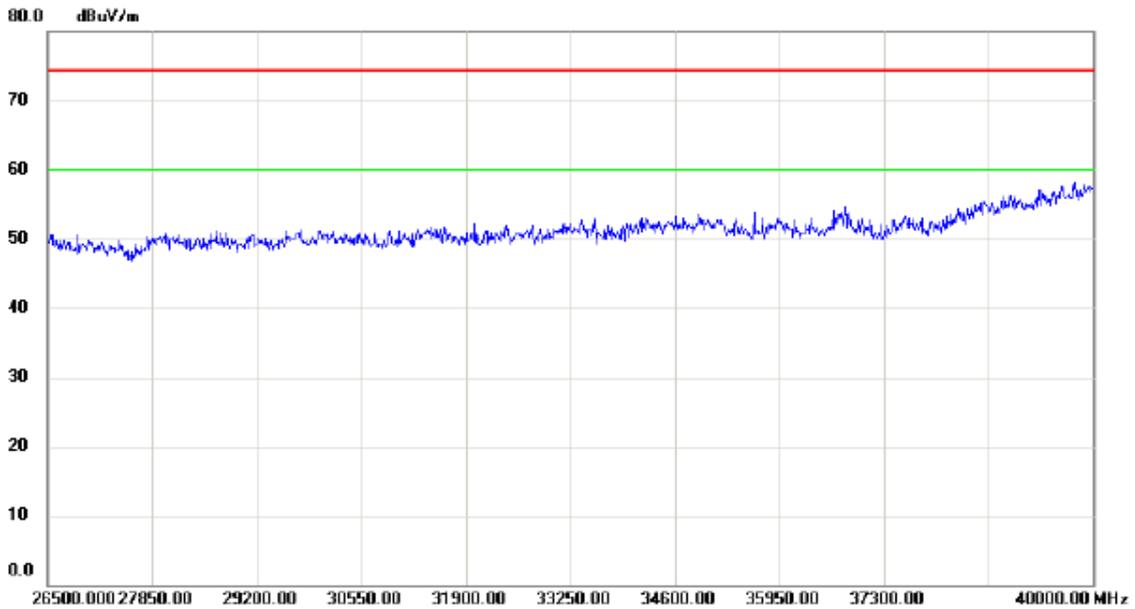

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Vertical

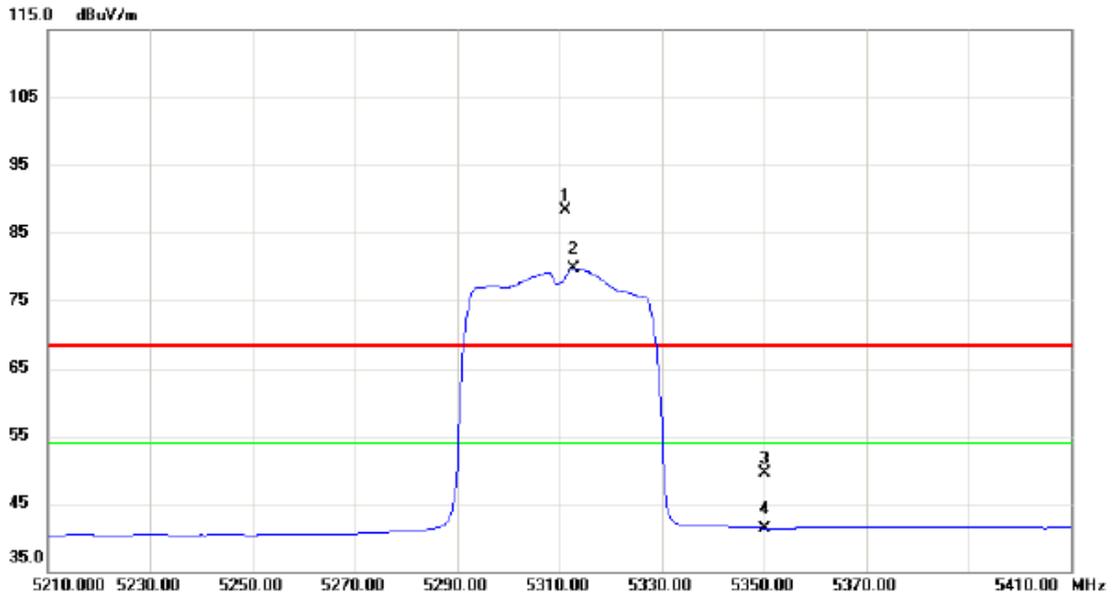


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5311.200	47.24	41.16	88.40	68.30	20.10	peak	No Limit
2	*	5312.800	38.57	41.16	79.73	54.00	25.73	AVG	No Limit
3		5350.000	8.21	41.28	49.49	68.30	-18.81	peak	
4		5350.000	0.08	41.28	41.36	54.00	-12.64	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

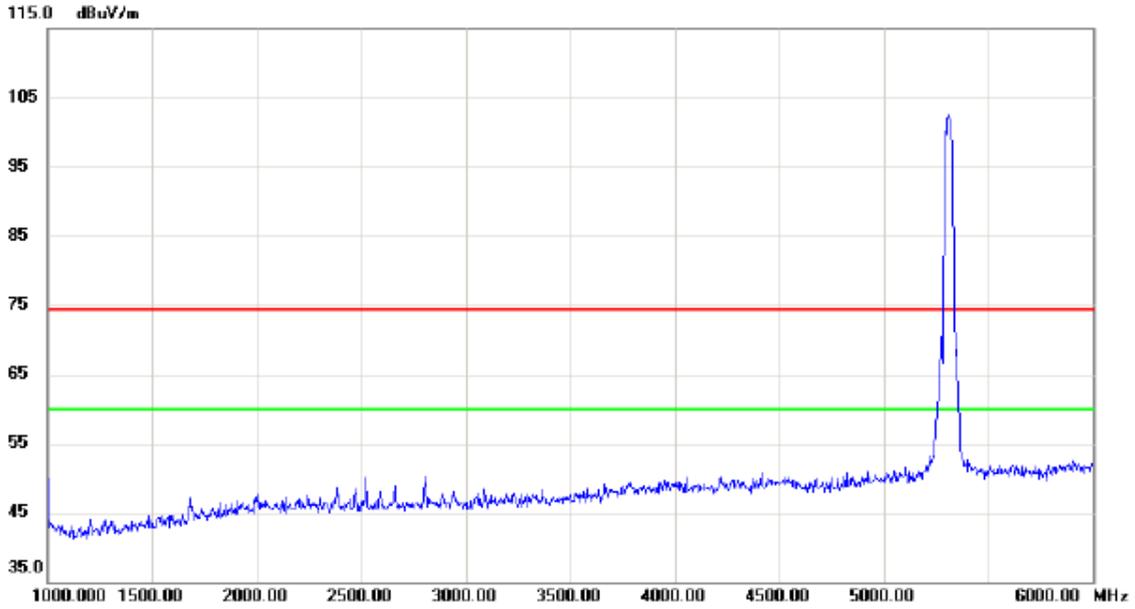


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

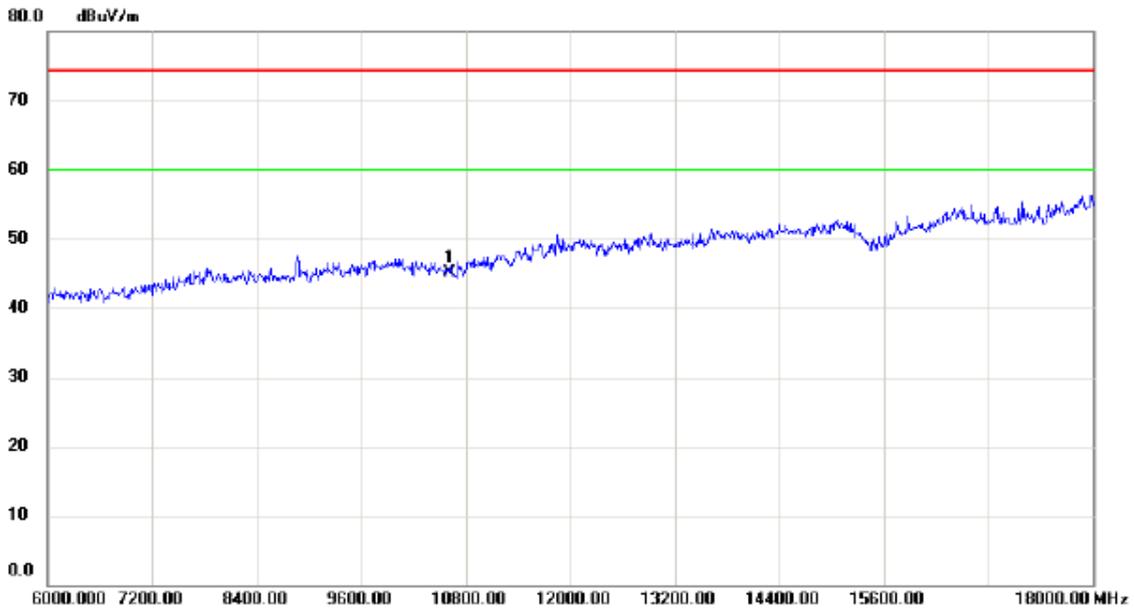


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10620.00	30.97	14.17	45.14	74.30	-29.16	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

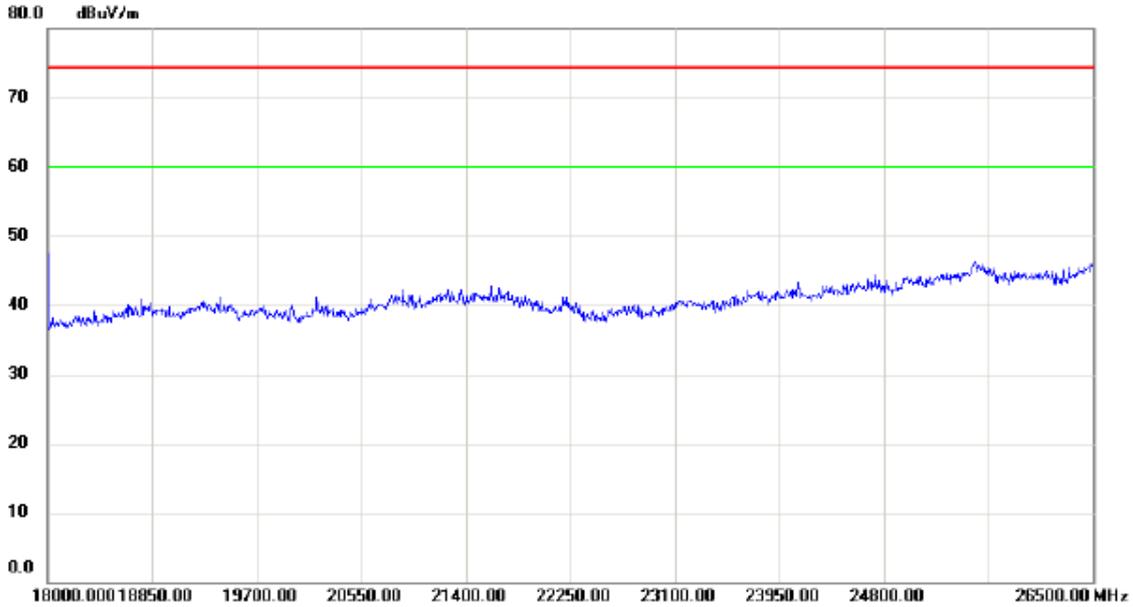


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

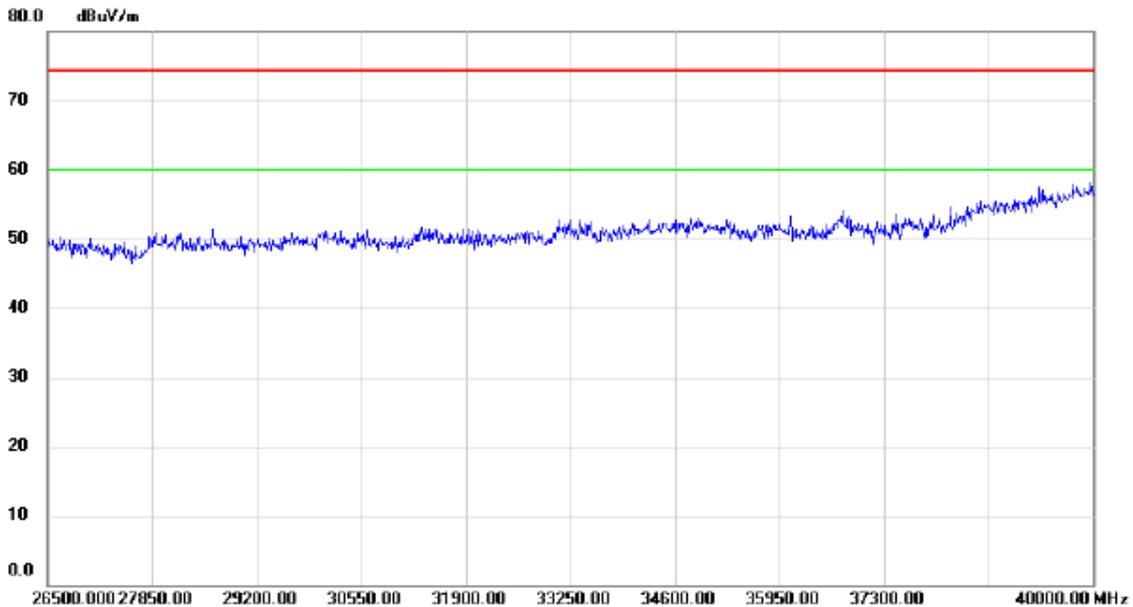

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Horizontal

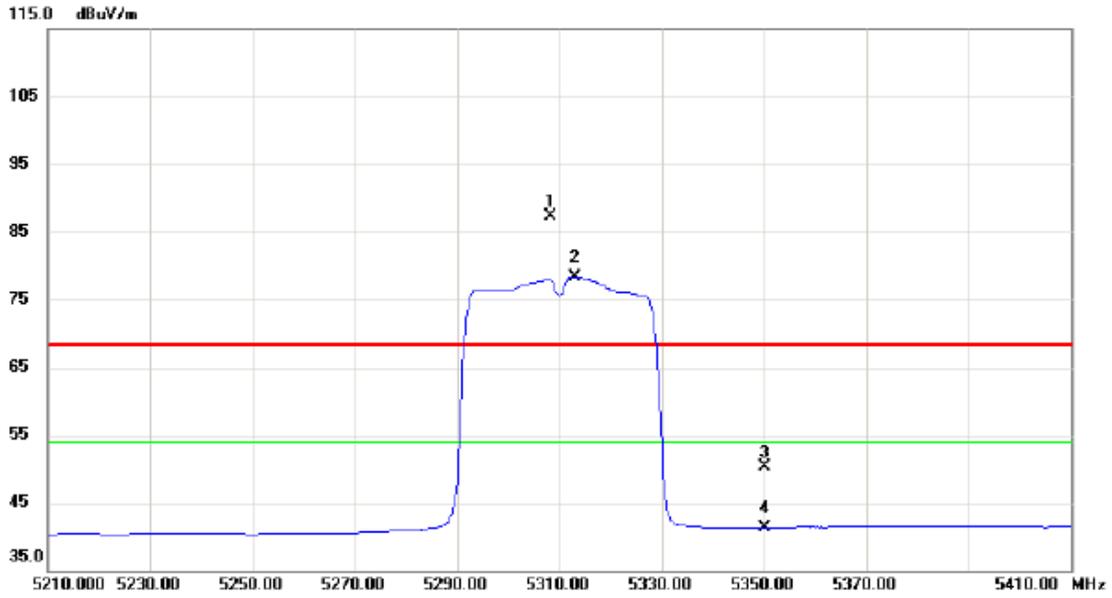

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5308.200	46.22	41.15	87.37	68.30	19.07	peak	No Limit
2	*	5313.000	37.21	41.16	78.37	54.00	24.37	AVG	No Limit
3		5350.000	9.03	41.28	50.31	68.30	-17.99	peak	
4		5350.000	0.03	41.28	41.31	54.00	-12.69	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

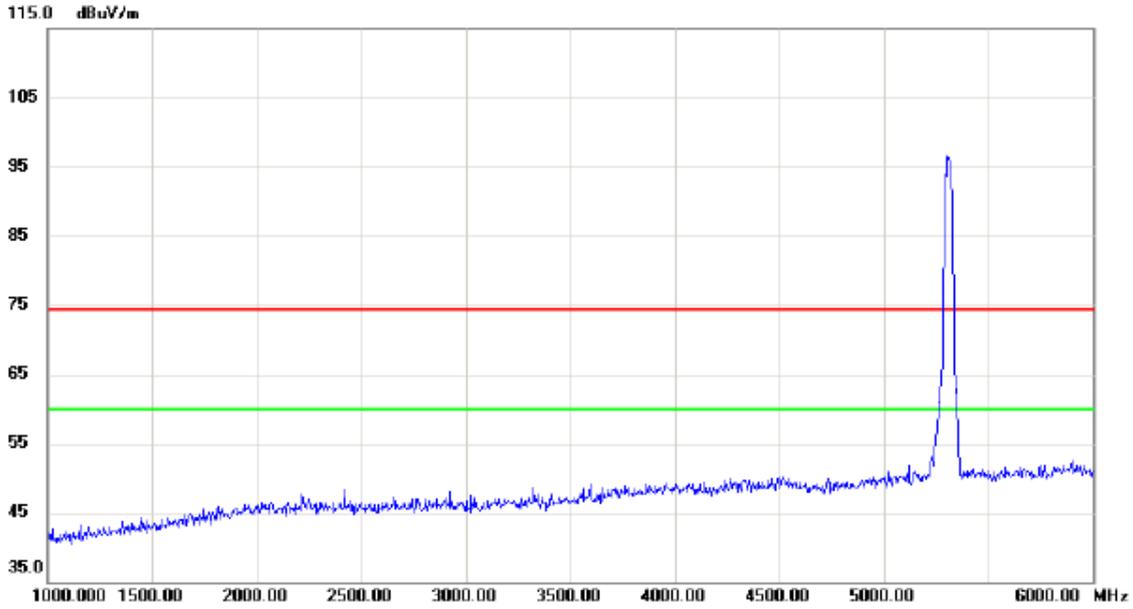


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		




No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10620.00	30.97	14.17	45.14	74.30	-29.16	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

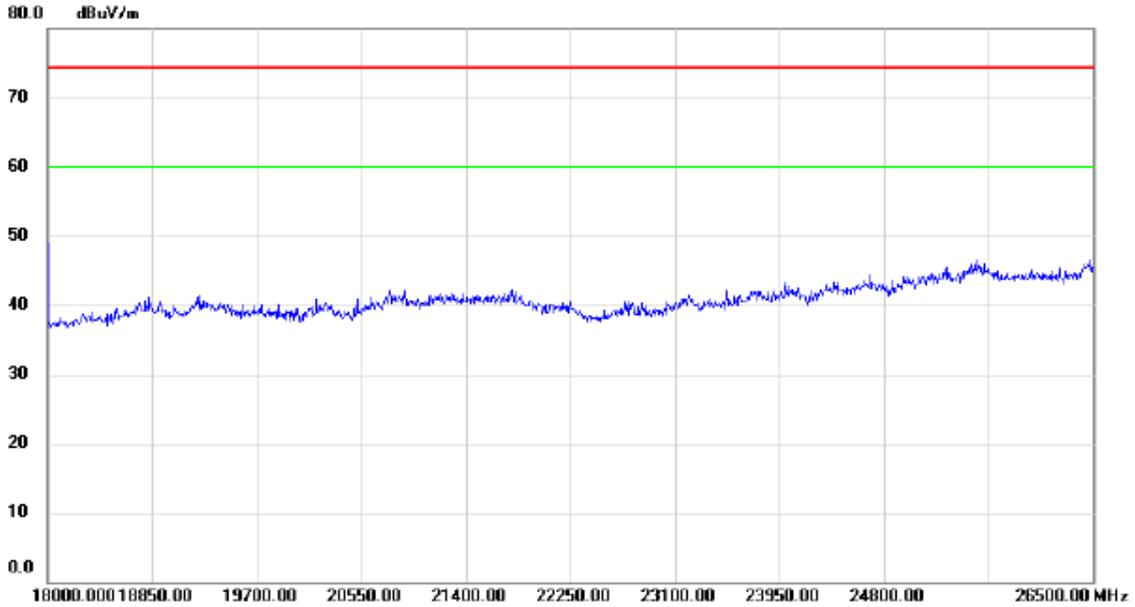


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

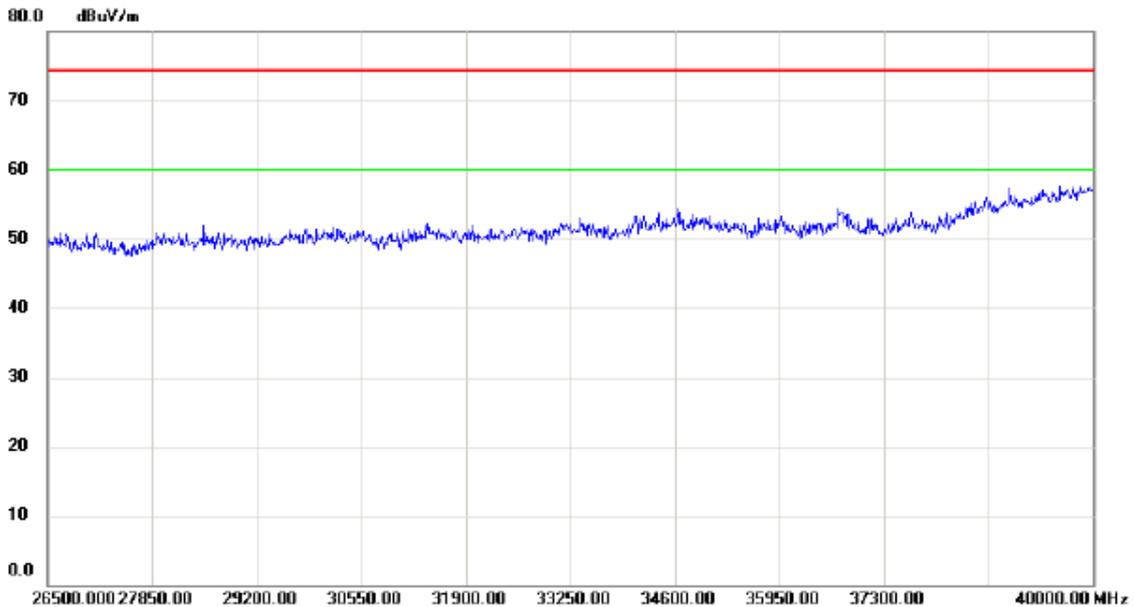

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Vertical

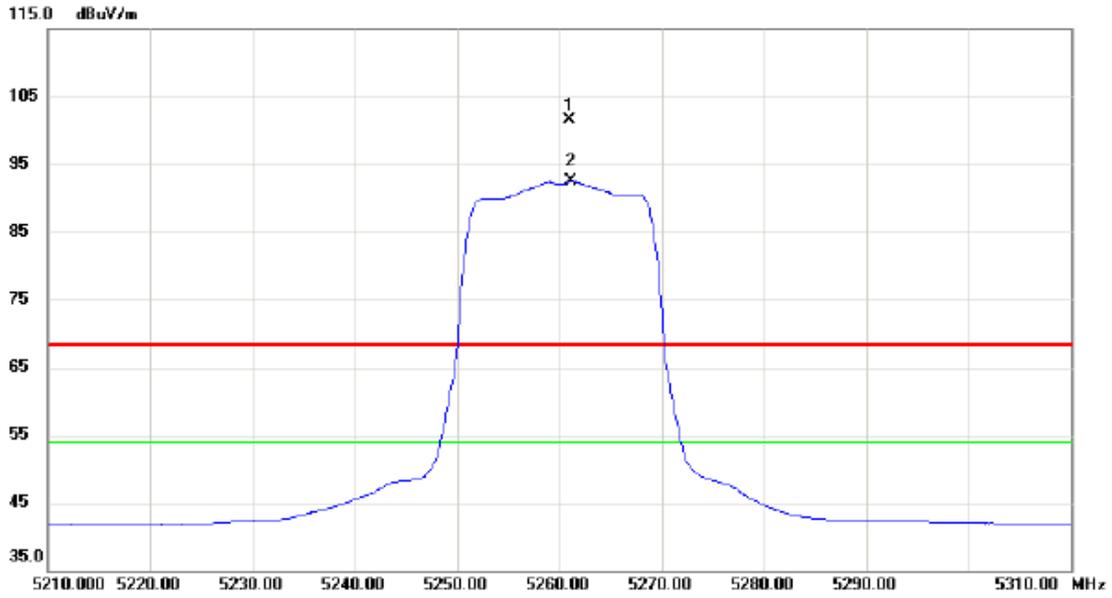


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5261.000	60.45	40.99	101.44	68.30	33.14	peak	No Limit
2	*	5261.200	51.56	41.00	92.56	54.00	38.56	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Vertical

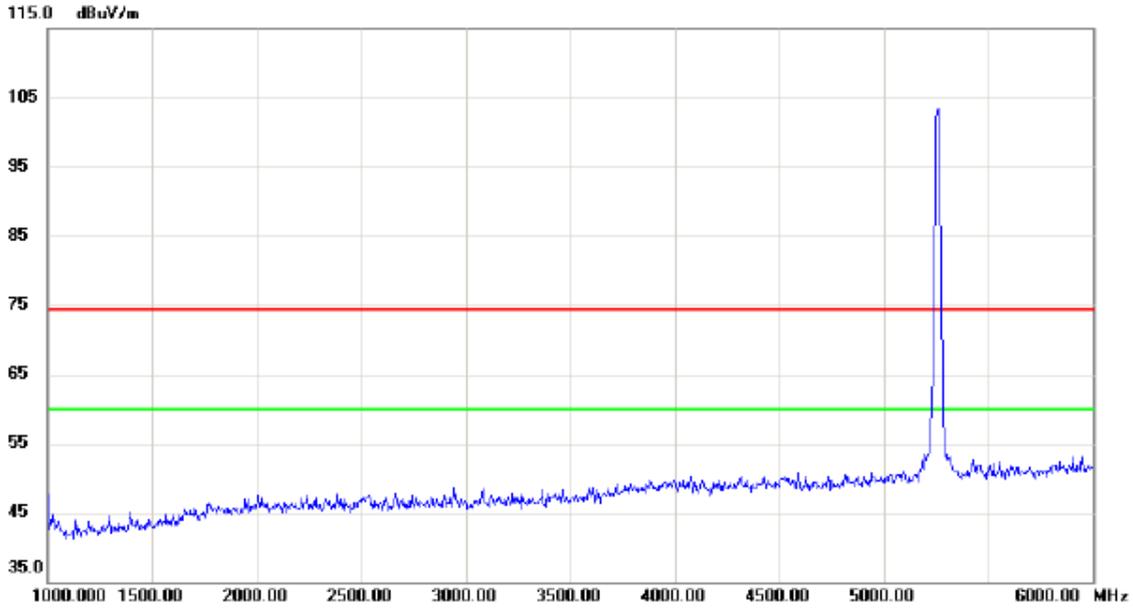


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

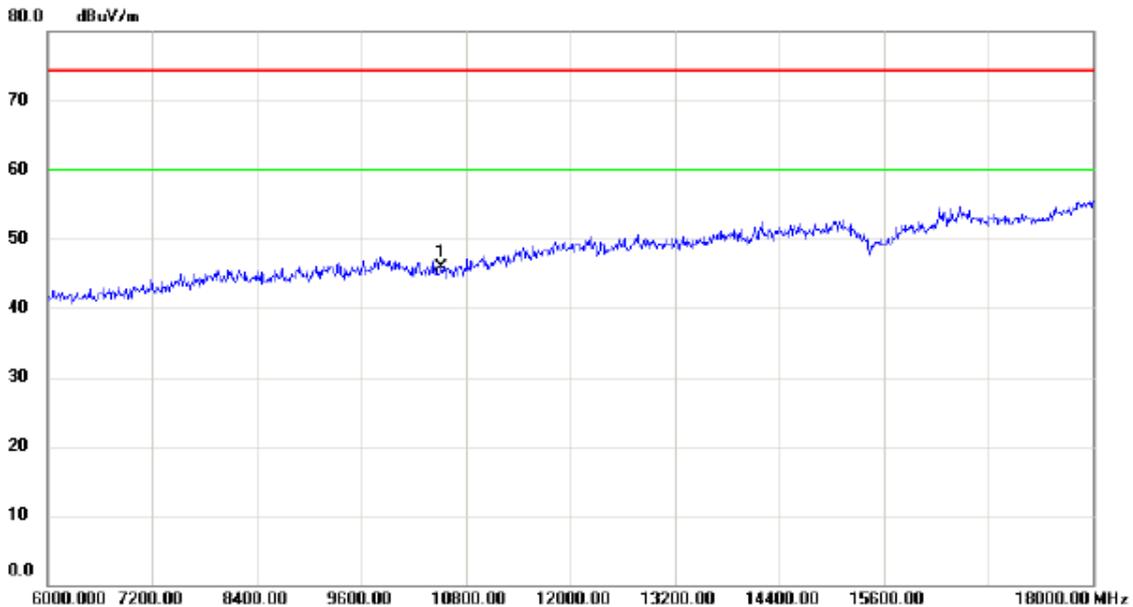


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10520.00	32.13	13.75	45.88	74.30	-28.42	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Vertical

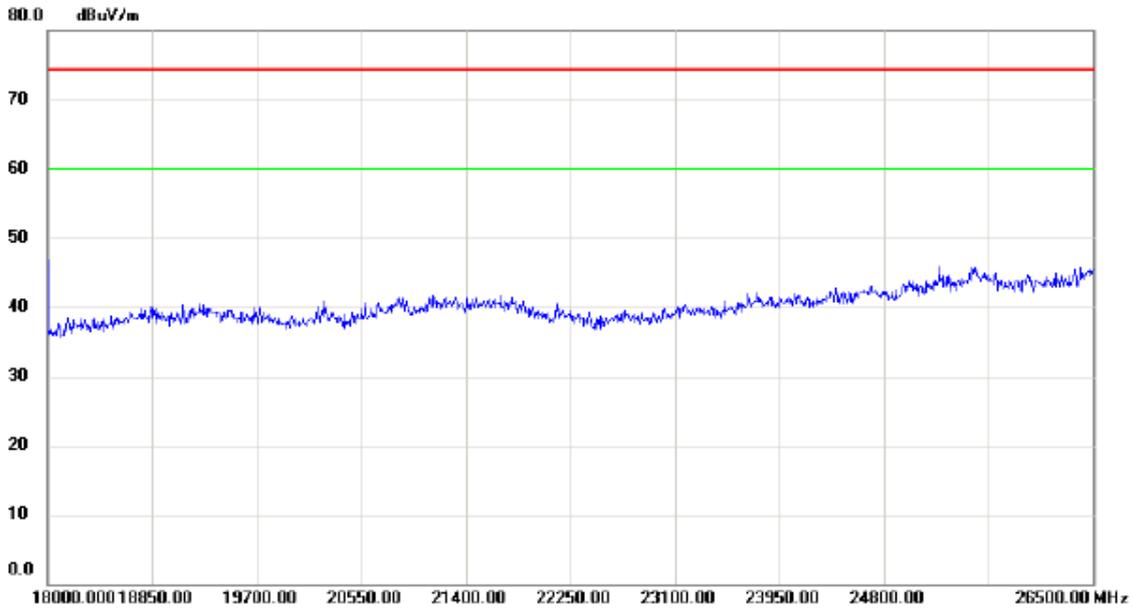


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

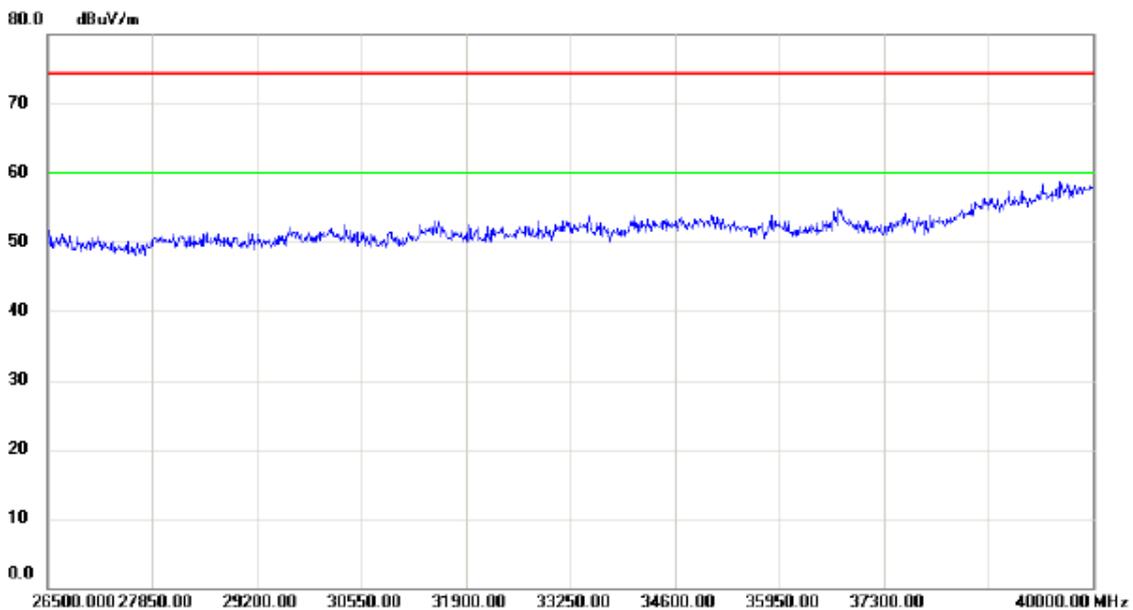

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Horizontal

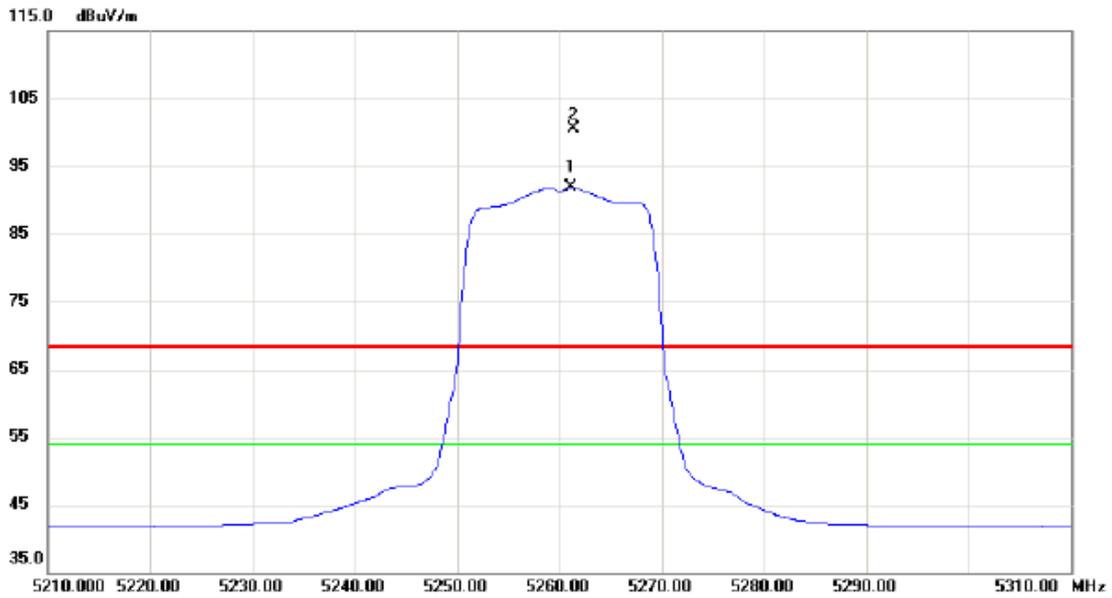


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5261.100	51.00	40.99	91.99	54.00	37.99	AVG	No Limit
2	X	5261.400	59.60	41.00	100.60	68.30	32.30	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Horizontal

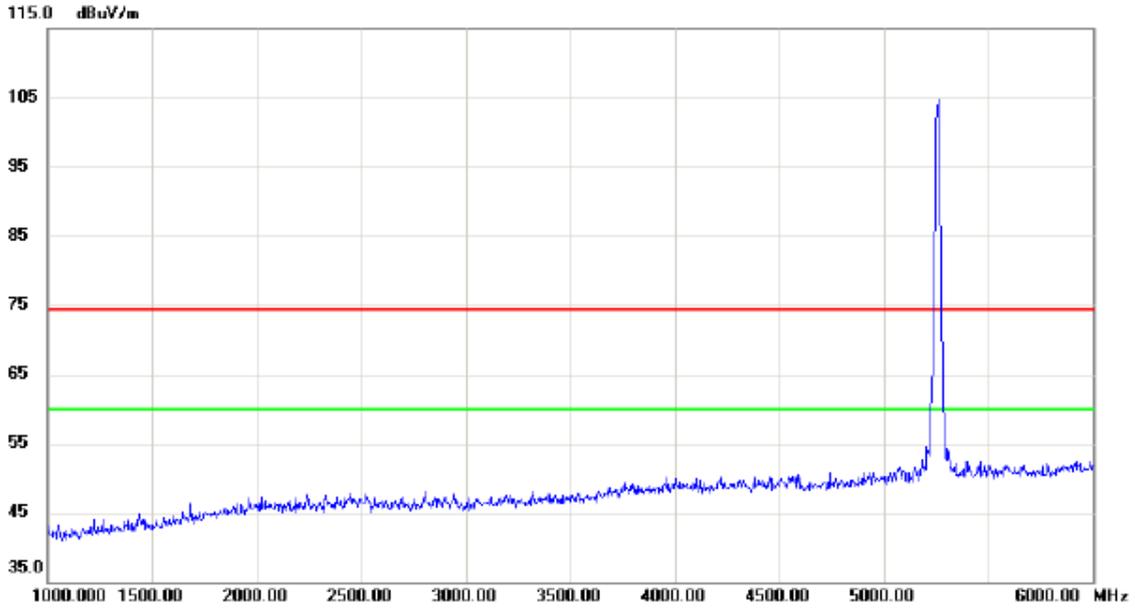


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

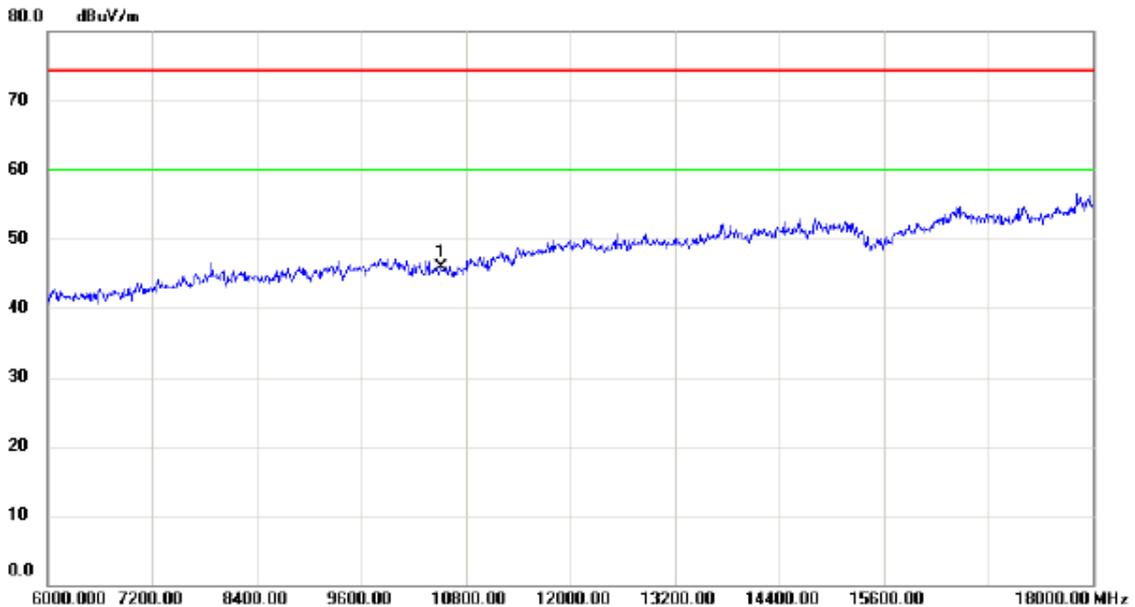


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10520.00	32.23	13.75	45.98	74.30	-28.32	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Horizontal

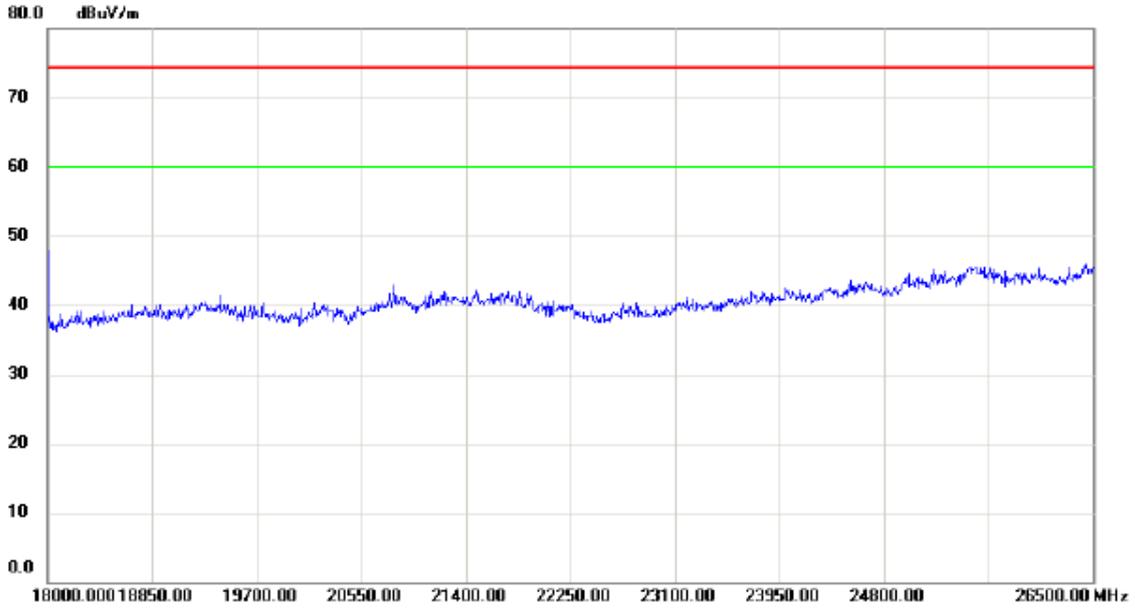


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

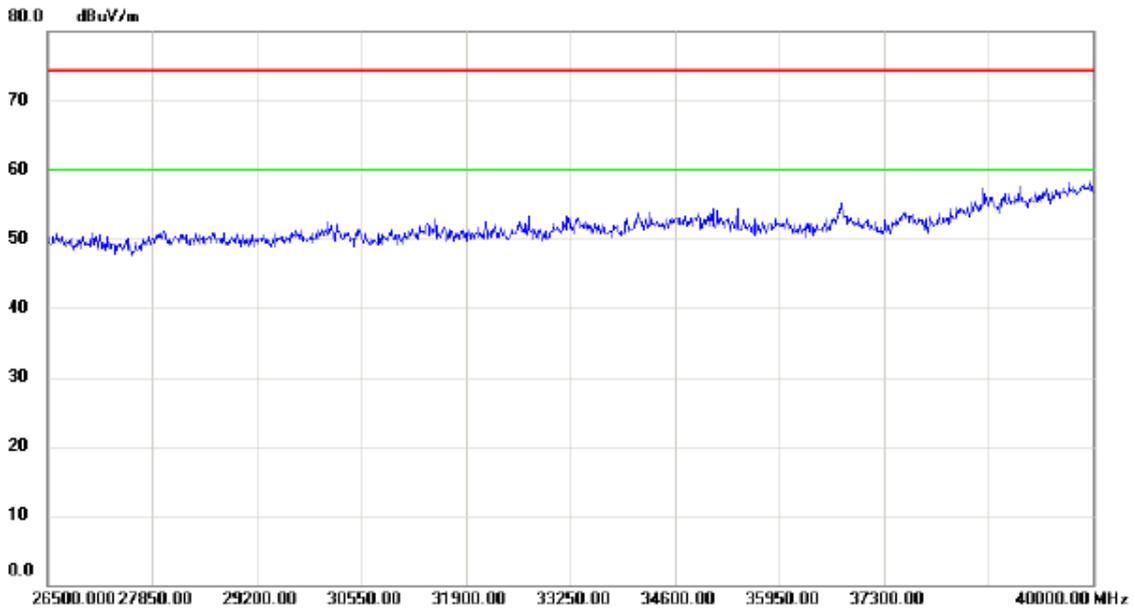

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Vertical

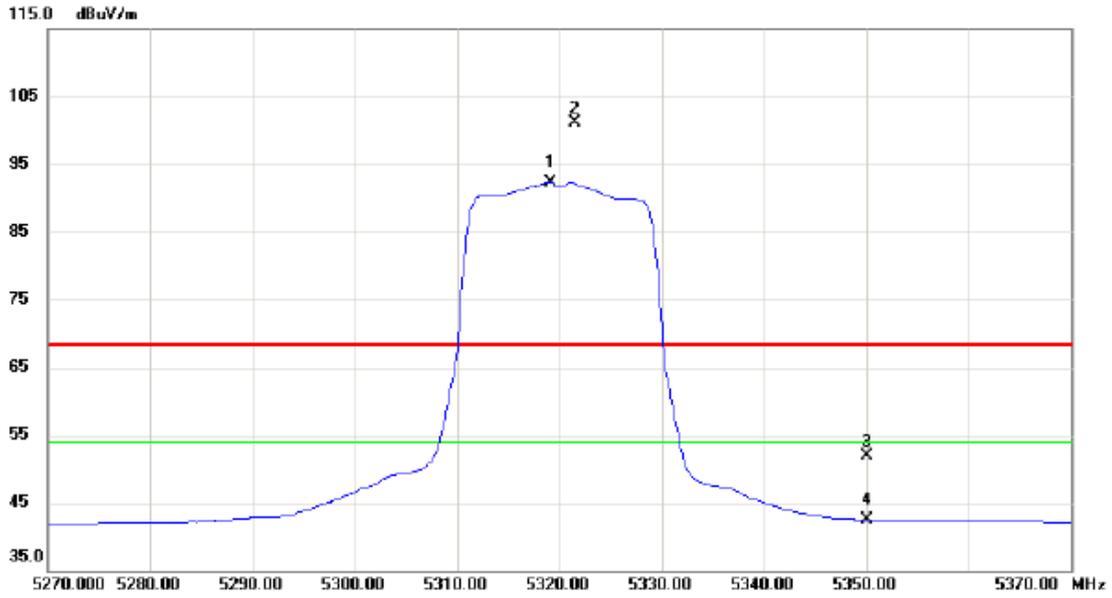


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5319.100	51.16	41.19	92.35	54.00	38.35	AVG	No Limit
2	X	5321.500	59.94	41.19	101.13	68.30	32.83	peak	No Limit
3		5350.000	10.71	41.28	51.99	68.30	-16.31	peak	
4		5350.000	1.20	41.28	42.48	54.00	-11.52	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Vertical

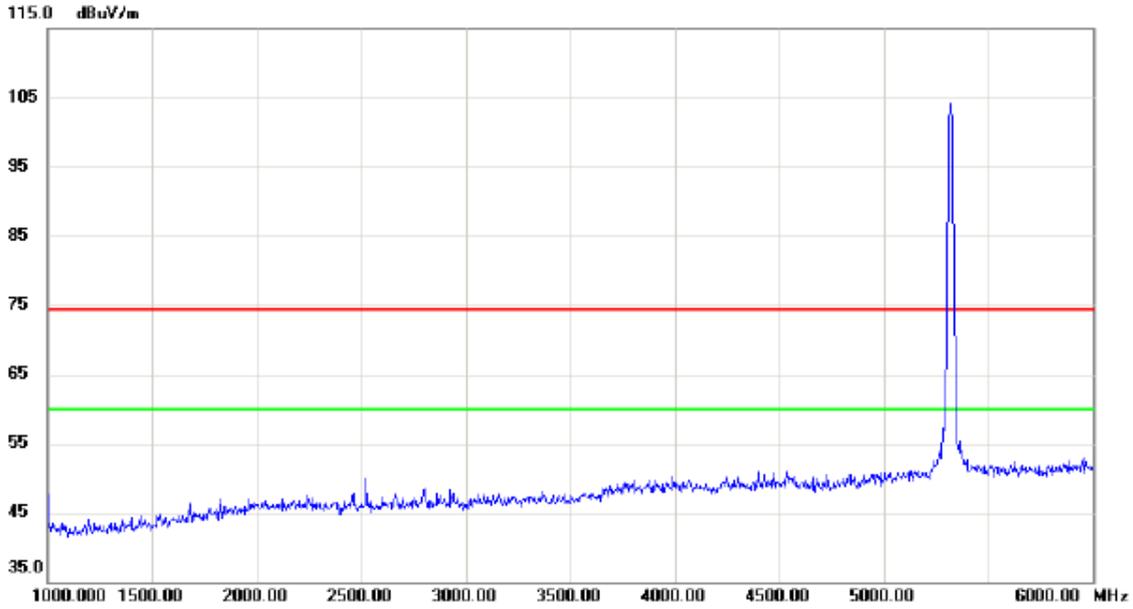


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

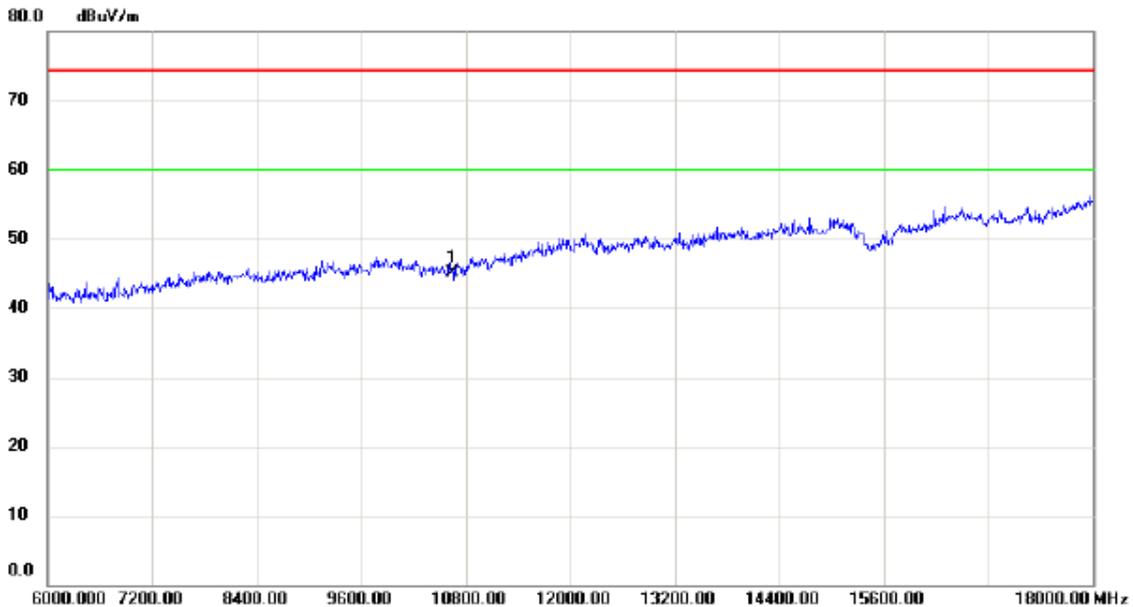


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10640.00	30.76	14.25	45.01	74.30	-29.29	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Vertical

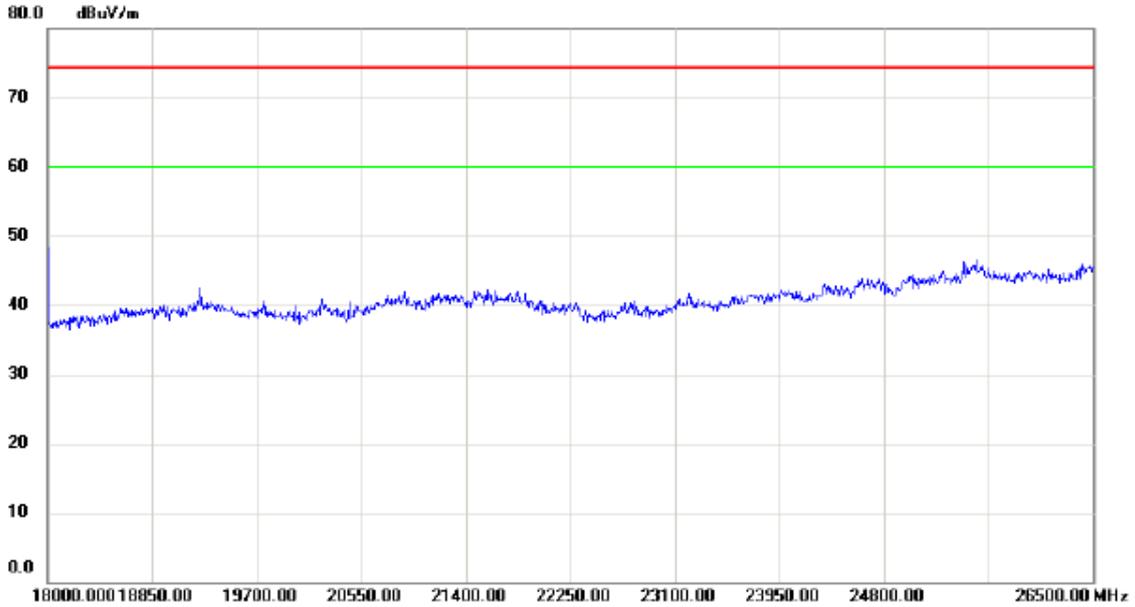


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

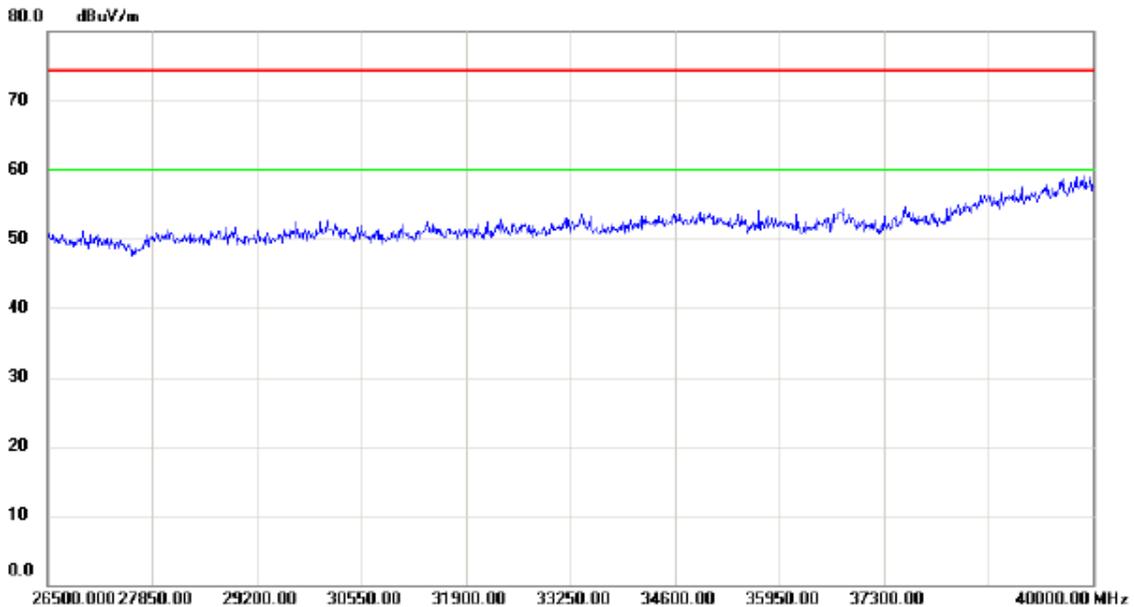

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Horizontal

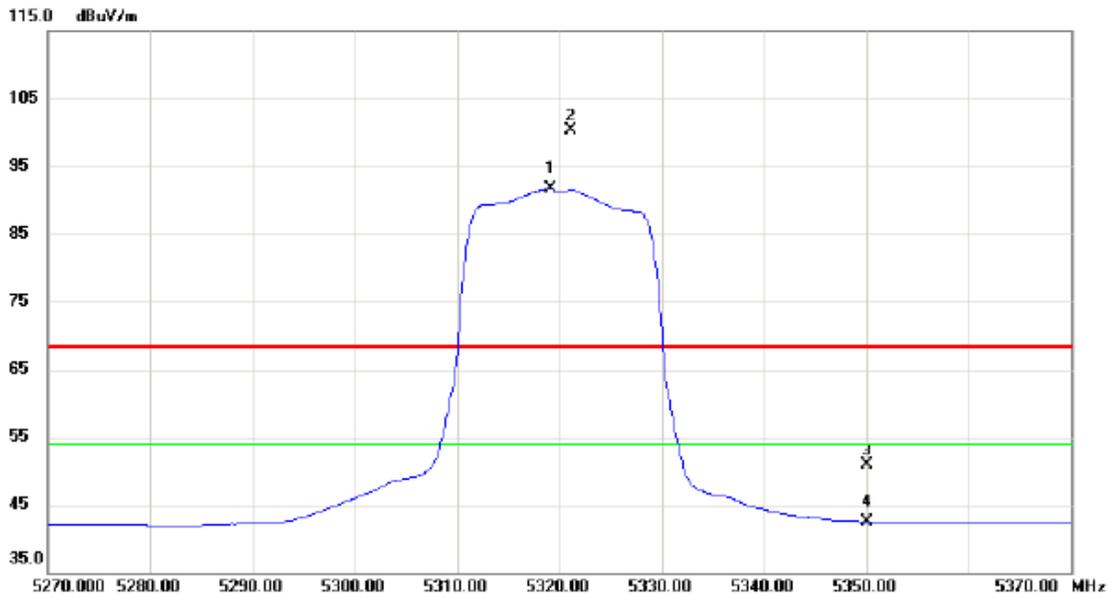


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5319.200	50.54	41.19	91.73	54.00	37.73	AVG	No Limit
2	X	5321.100	59.14	41.19	100.33	68.30	32.03	peak	No Limit
3		5350.000	9.67	41.28	50.95	68.30	-17.35	peak	
4		5350.000	1.26	41.28	42.54	54.00	-11.46	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Horizontal

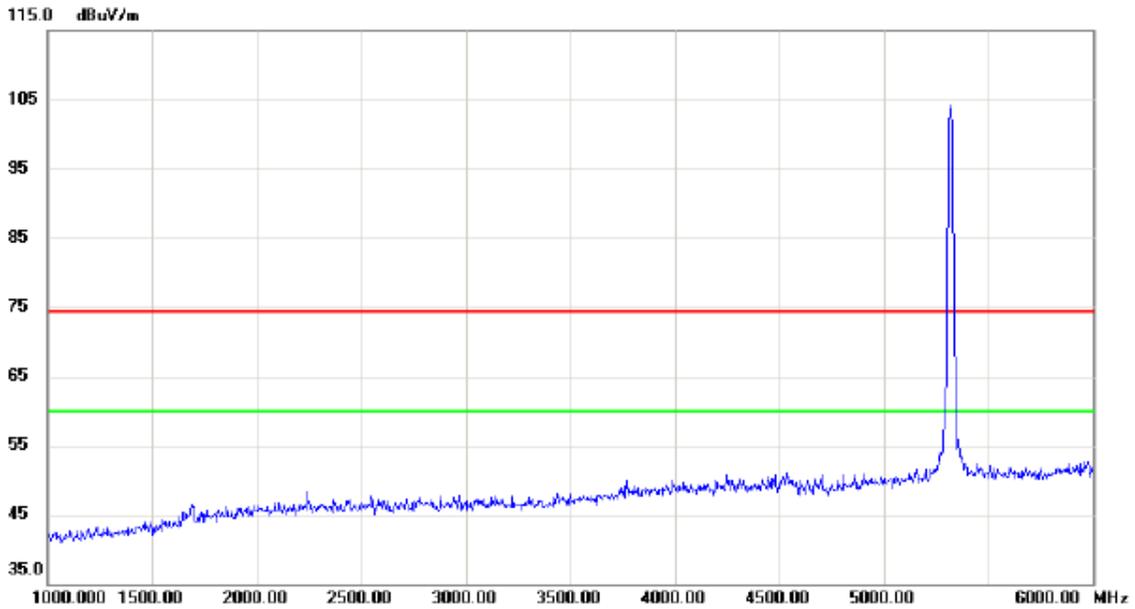


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

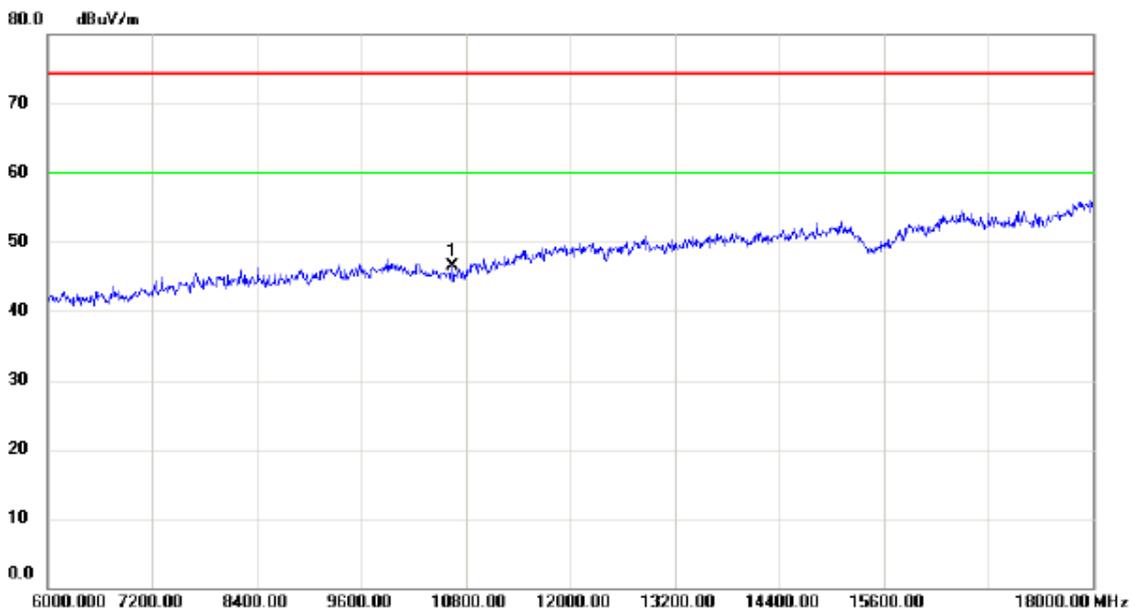


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10640.00	32.18	14.25	46.43	74.30	-27.87	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Horizontal

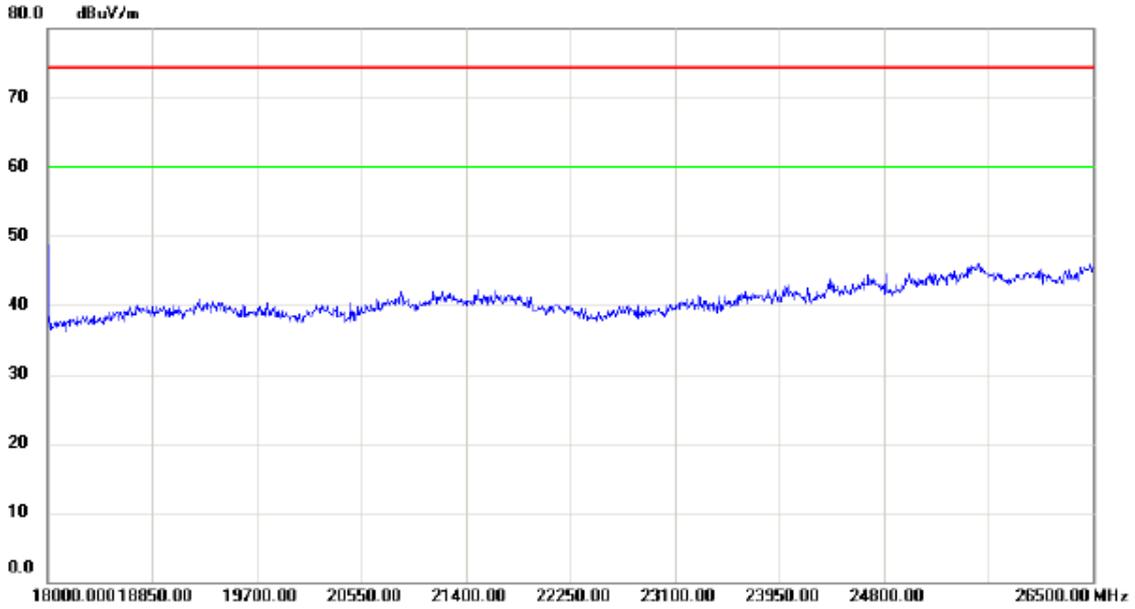


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

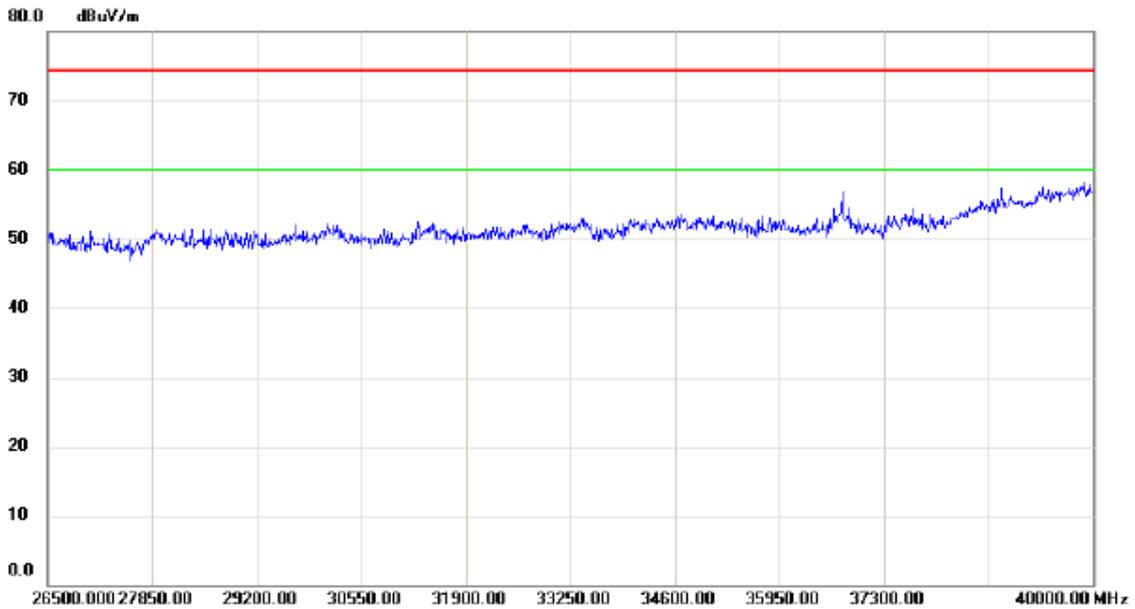

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Vertical

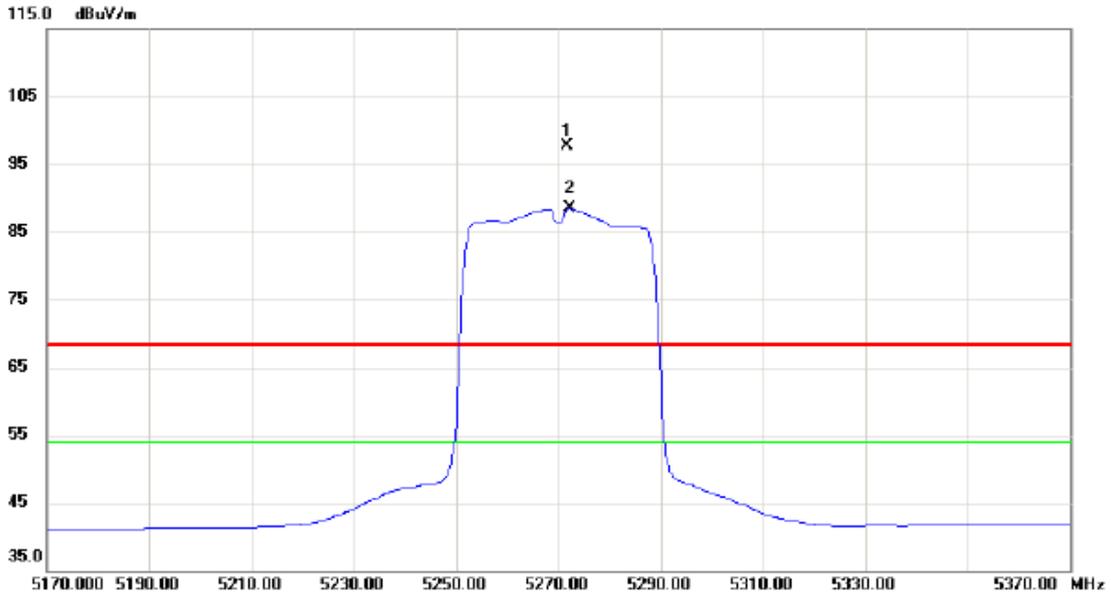


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5271.800	56.68	41.02	97.70	68.30	29.40	peak	No Limit
2	*	5272.200	47.42	41.02	88.44	54.00	34.44	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Vertical

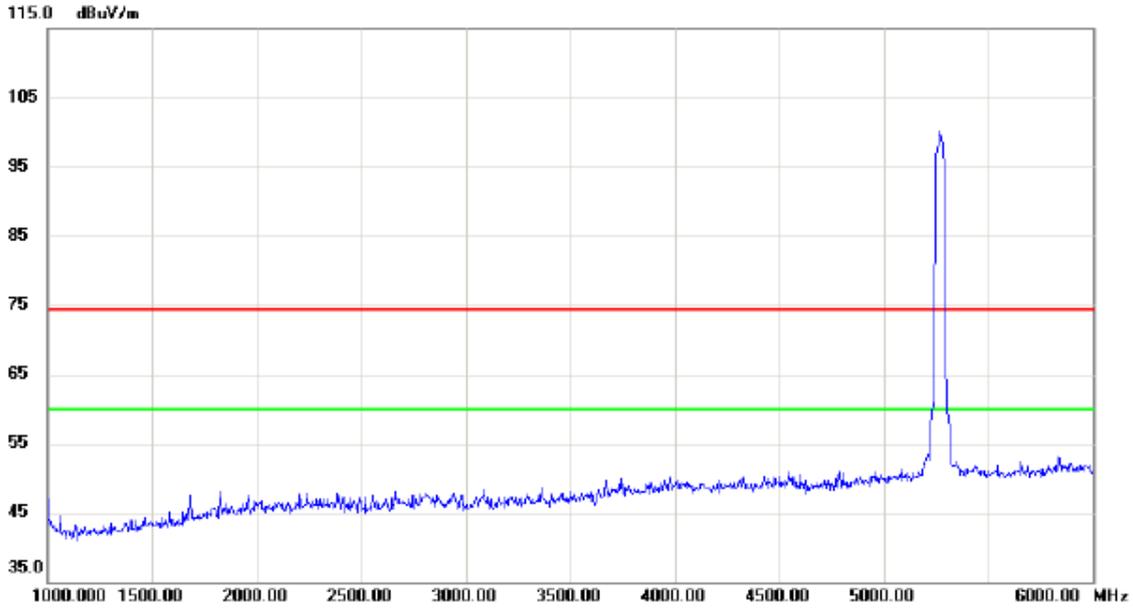


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

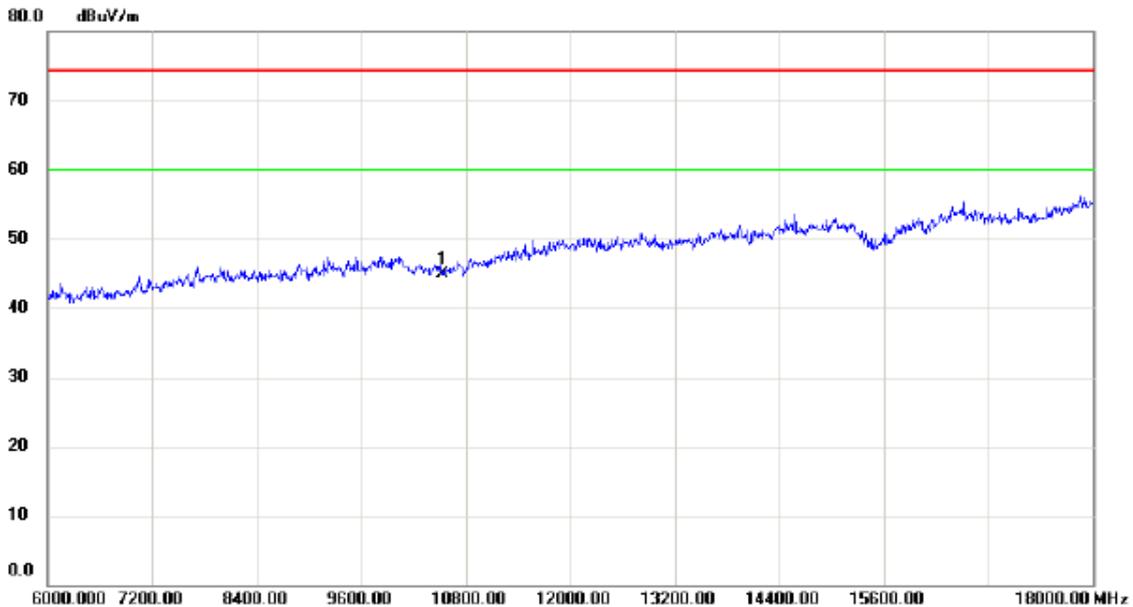


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10540.00	30.99	13.84	44.83	74.30	-29.47	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Vertical

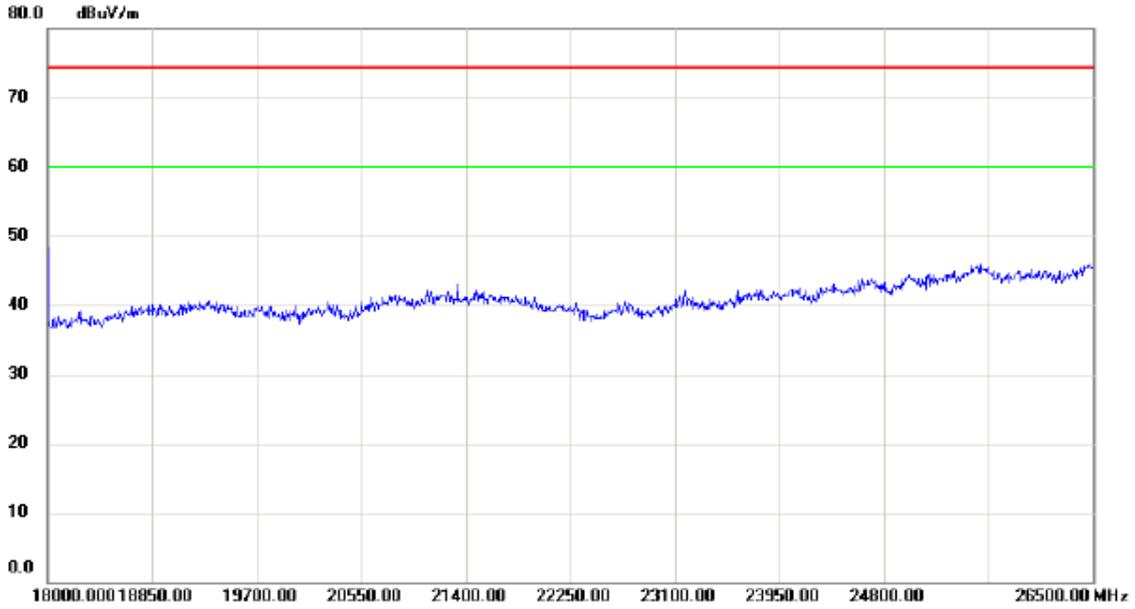


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

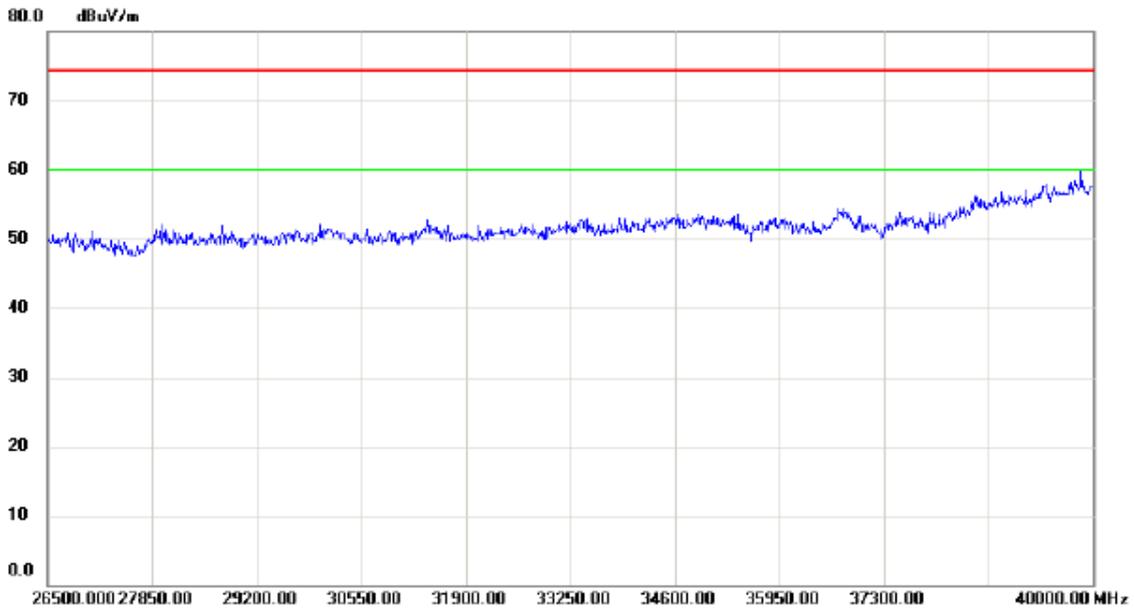

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Horizontal

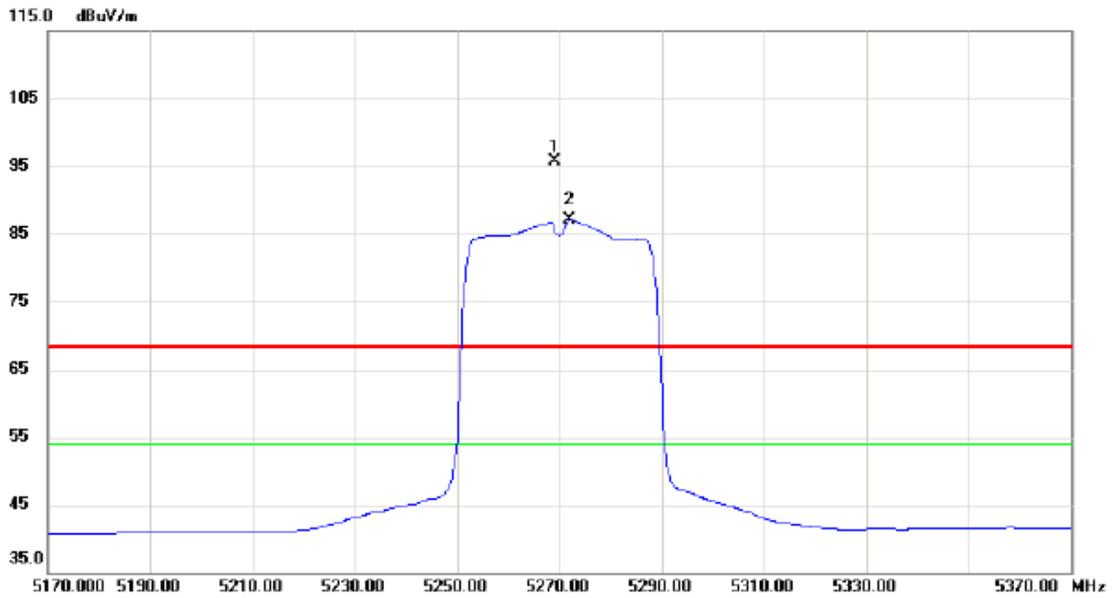


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5269.000	54.63	41.02	95.65	68.30	27.35	peak	No Limit
2	*	5272.000	46.07	41.02	87.09	54.00	33.09	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal

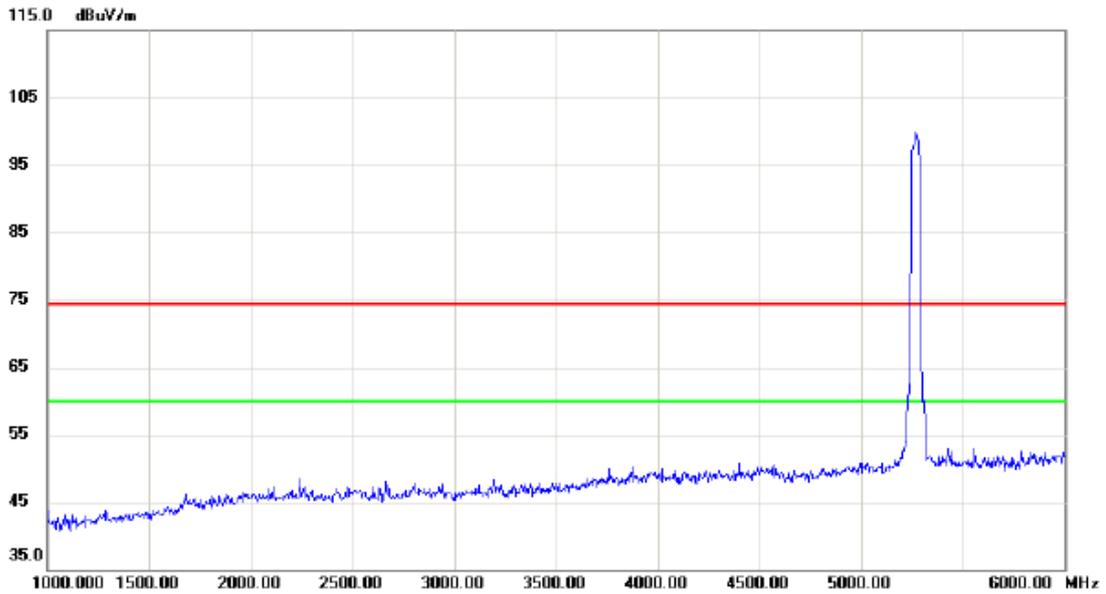


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

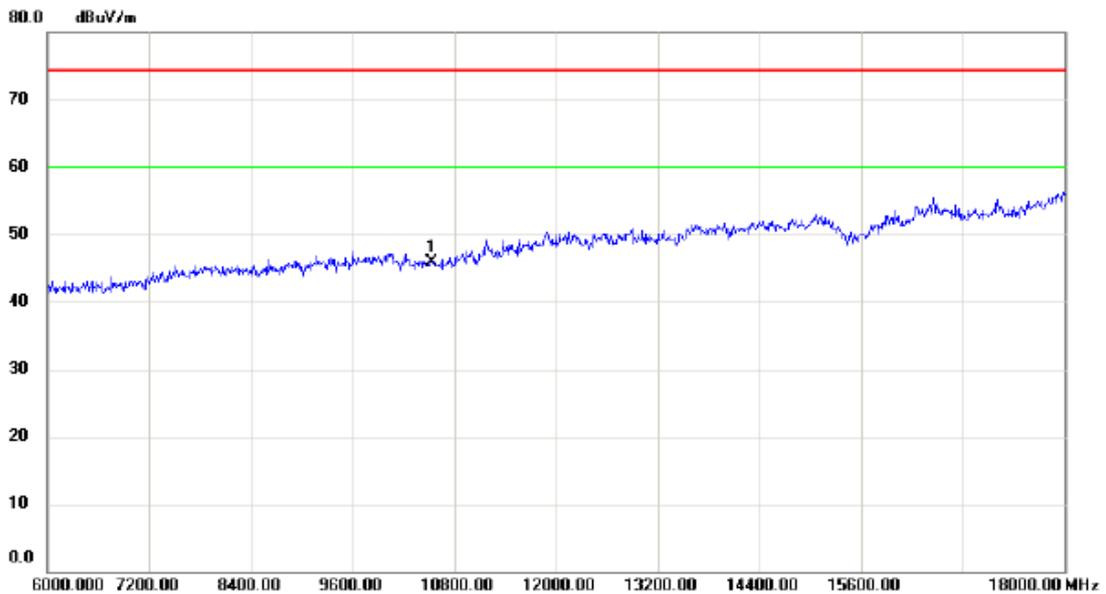


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	32.07	13.84	45.91	74.30	-28.39	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal

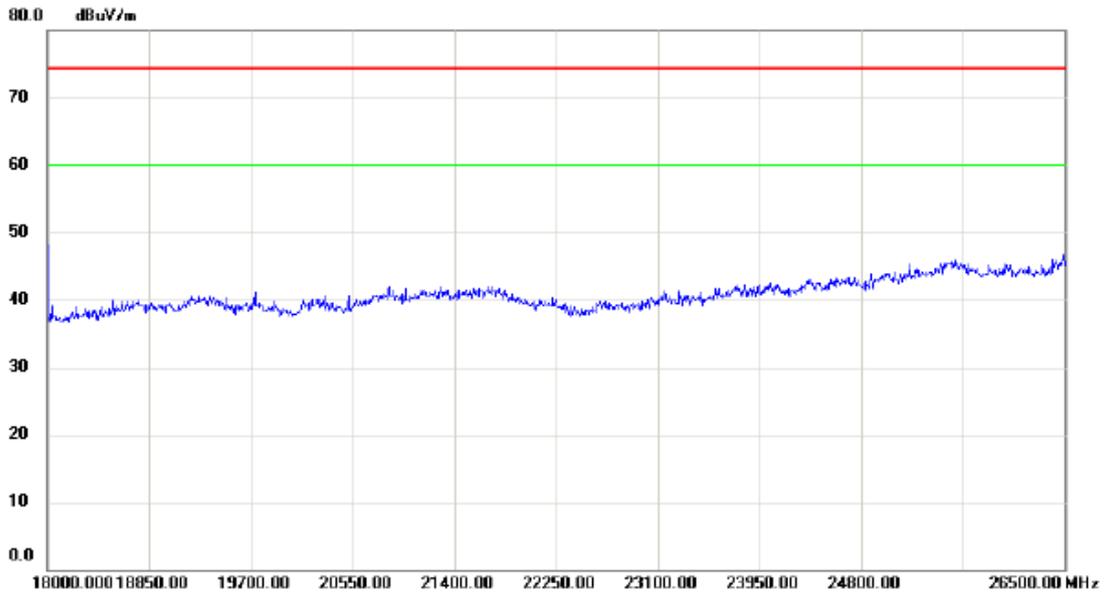


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

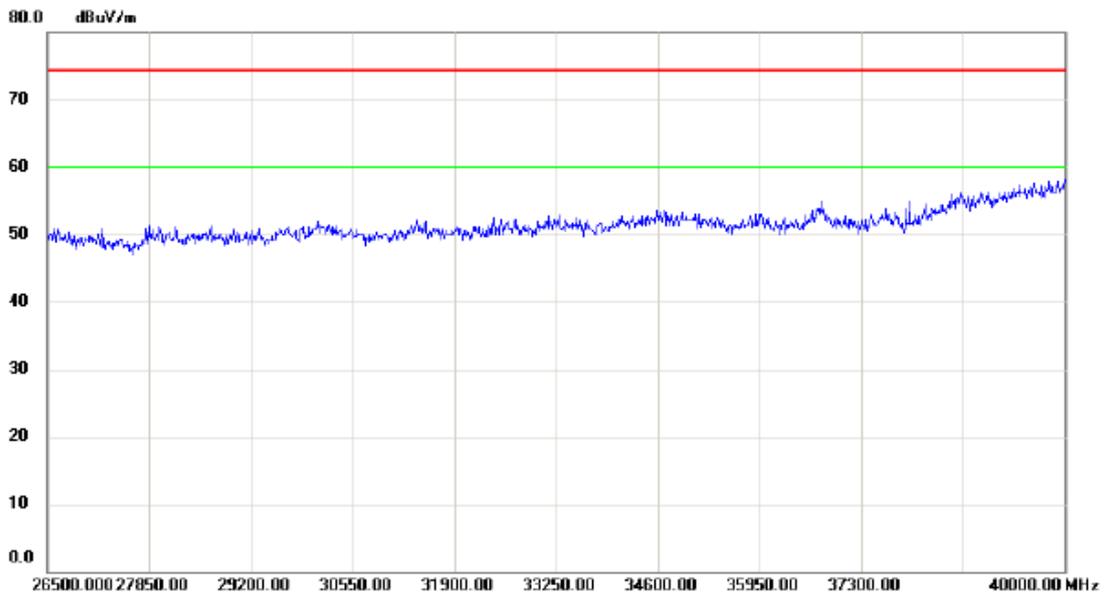

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


Vertical

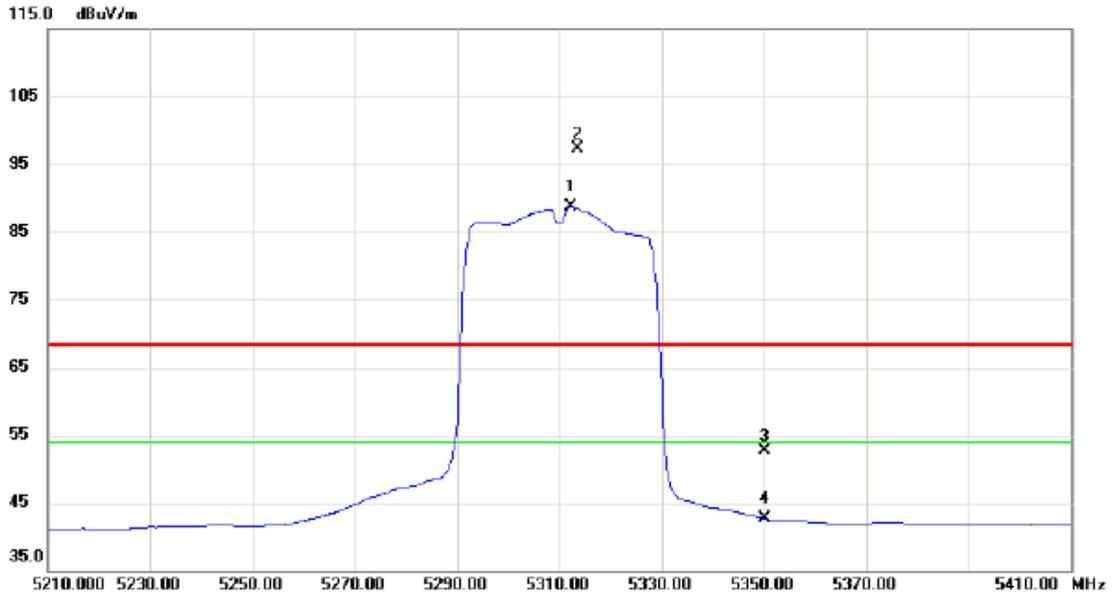


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5312.200	47.49	41.16	88.65	54.00	34.65	AVG	No Limit
2	X	5313.600	56.06	41.16	97.22	68.30	28.92	peak	No Limit
3		5350.000	11.41	41.28	52.69	68.30	-15.61	peak	
4		5350.000	1.44	41.28	42.72	54.00	-11.28	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical

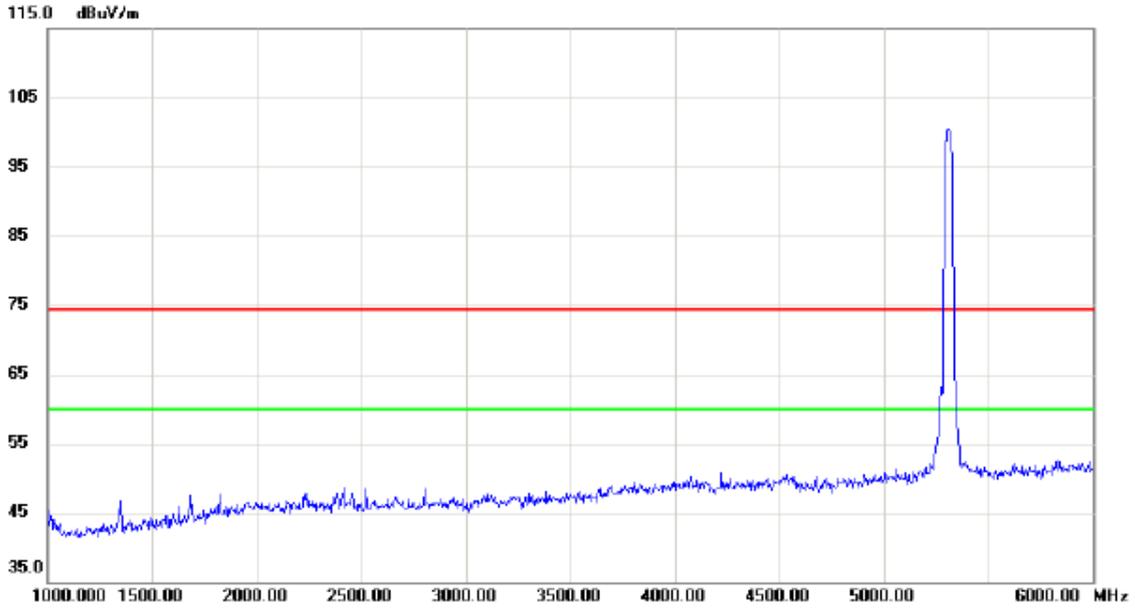


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

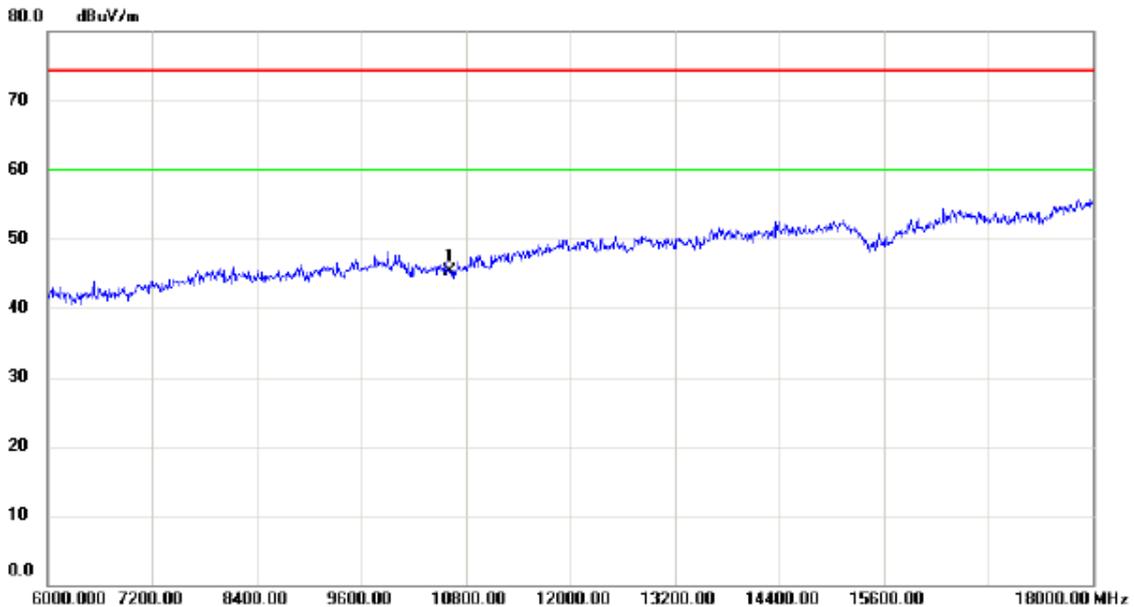


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10620.00	31.18	14.17	45.35	74.30	-28.95	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical

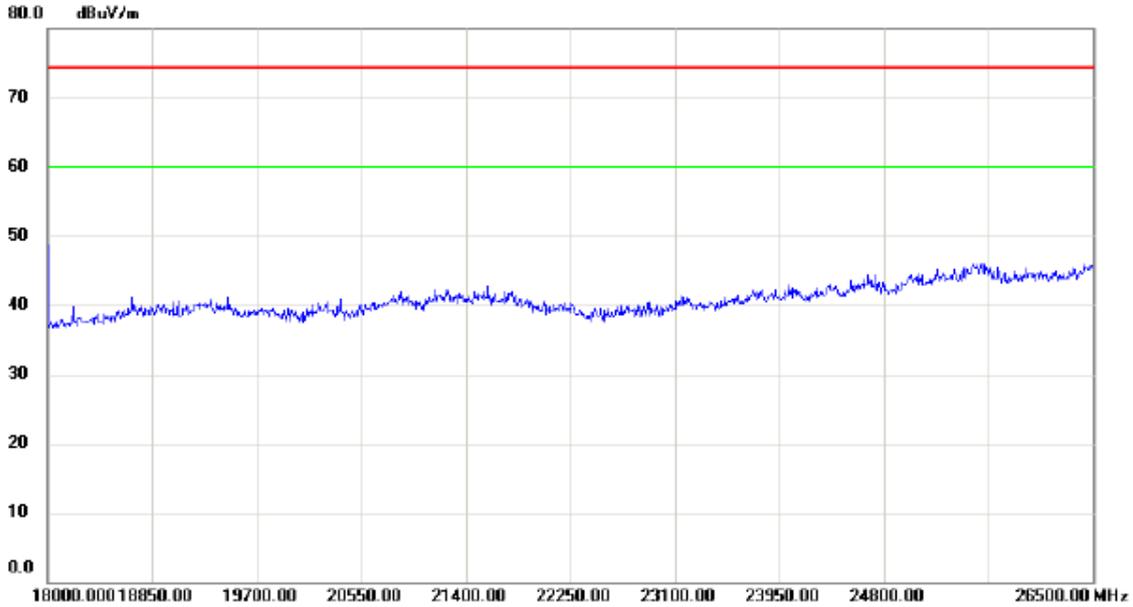


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

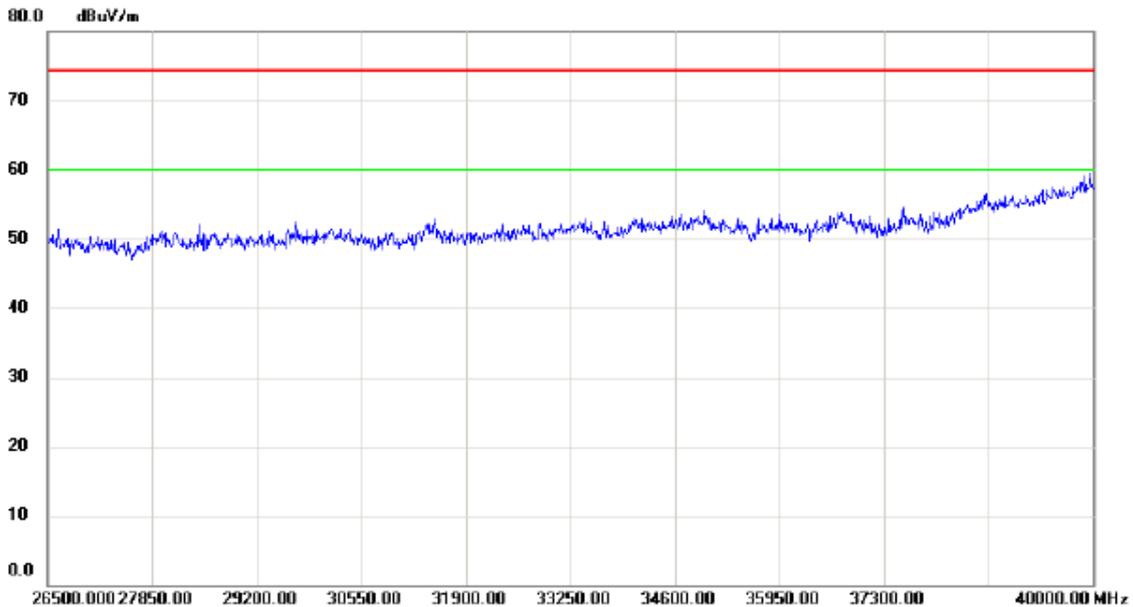

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


Horizontal

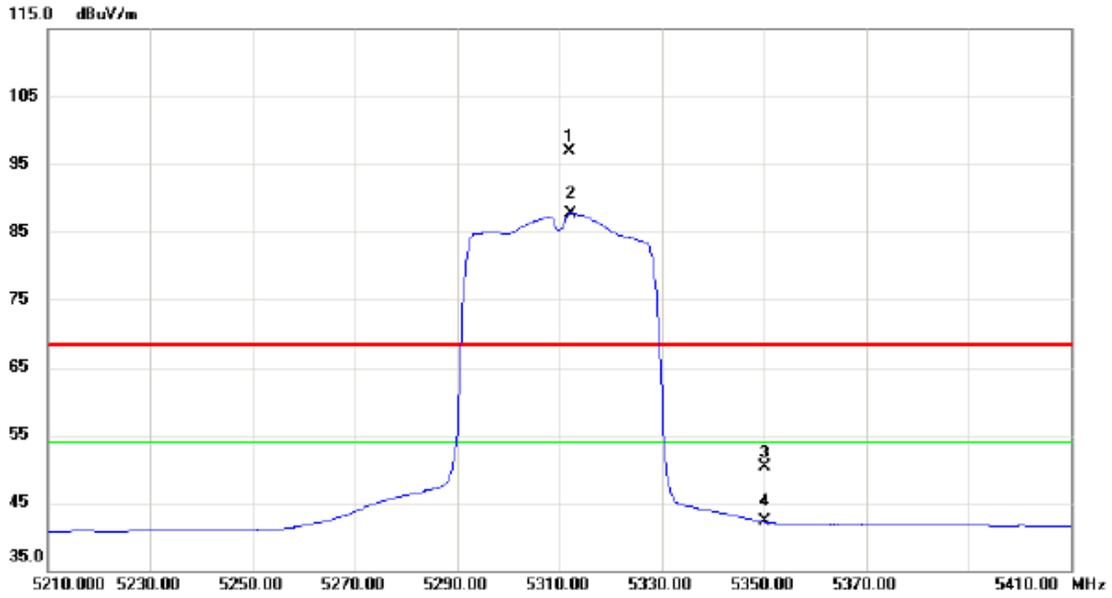


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5312.000	55.74	41.16	96.90	68.30	28.60	peak	No Limit
2	*	5312.200	46.57	41.16	87.73	54.00	33.73	AVG	No Limit
3		5350.000	9.05	41.28	50.33	68.30	-17.97	peak	
4		5350.000	0.93	41.28	42.21	54.00	-11.79	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Horizontal

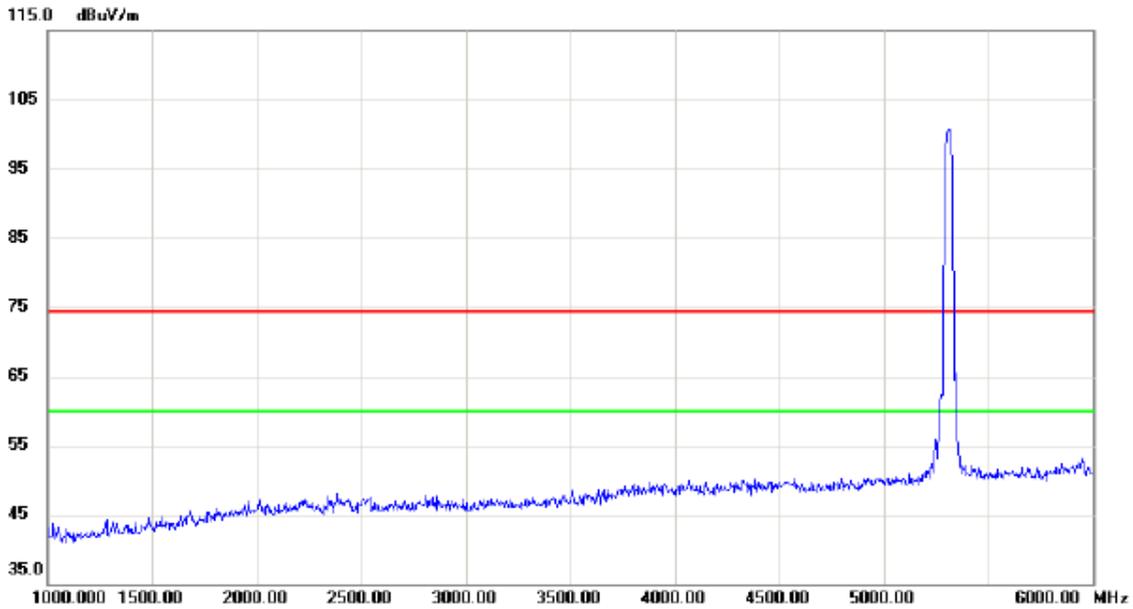


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

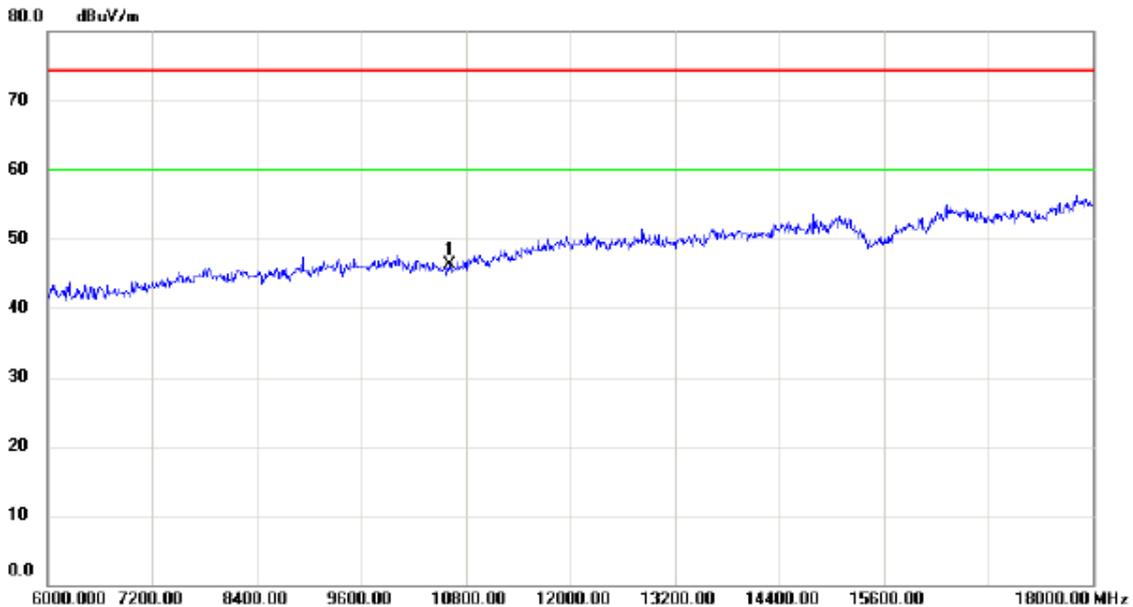


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10620.00	32.10	14.17	46.27	74.30	-28.03	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Horizontal

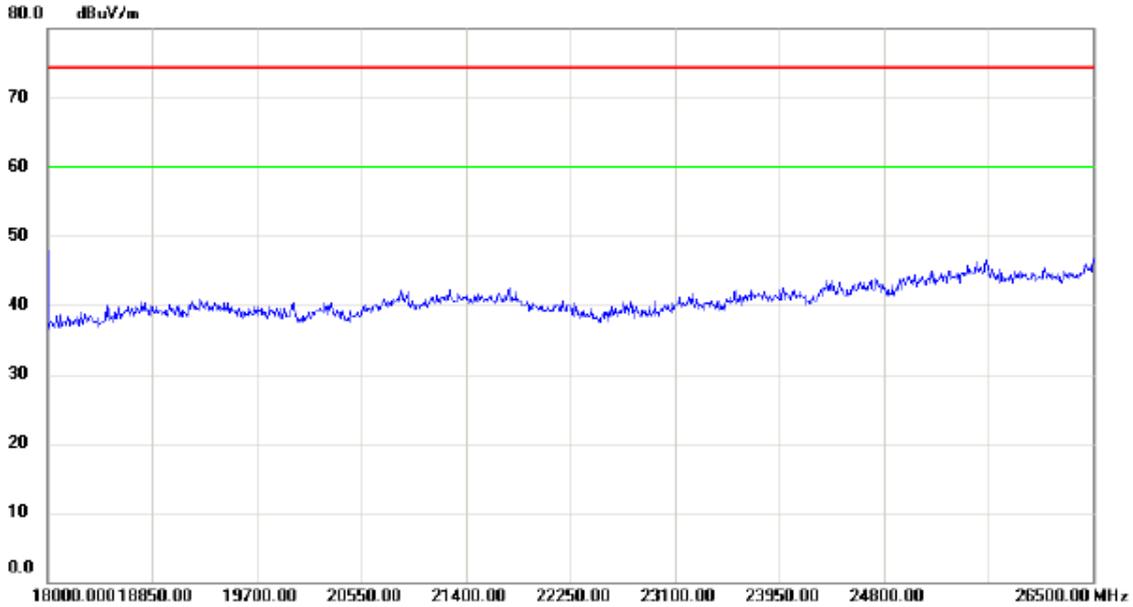


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

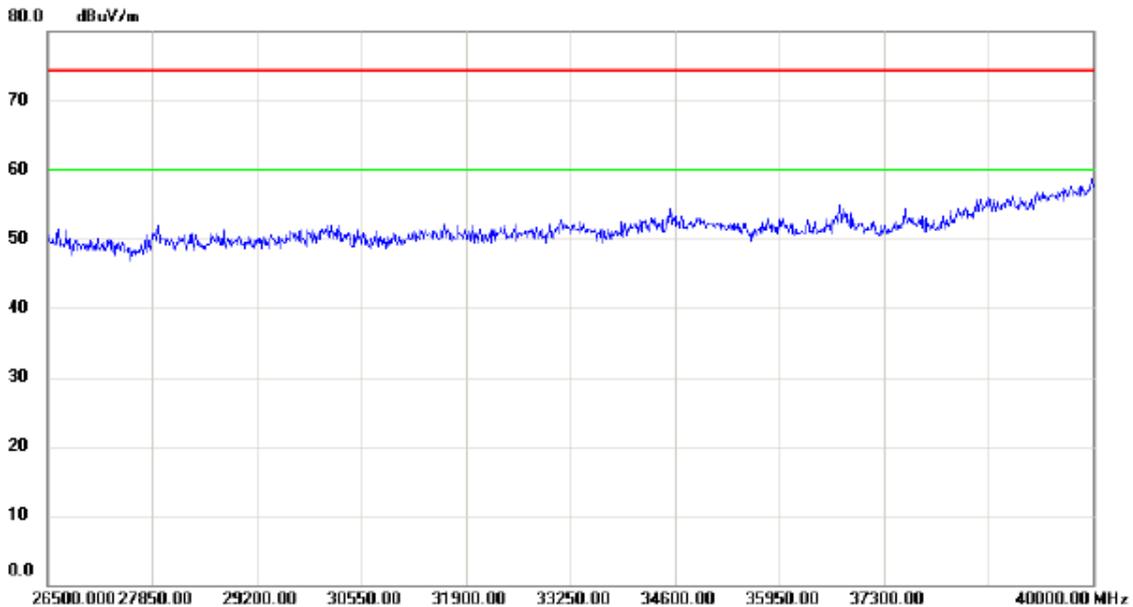

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Vertical

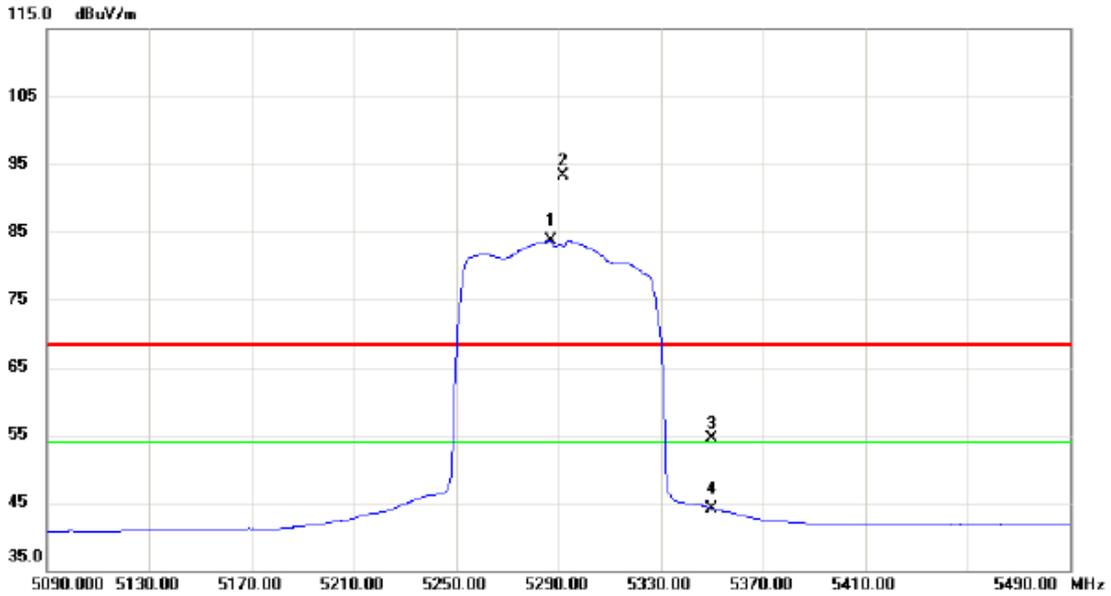


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5286.800	42.64	41.08	83.72	54.00	29.72	AVG	No Limit
2	X	5291.600	52.12	41.09	93.21	68.30	24.91	peak	No Limit
3		5350.000	13.31	41.28	54.59	68.30	-13.71	peak	
4		5350.000	2.89	41.28	44.17	54.00	-9.83	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Vertical

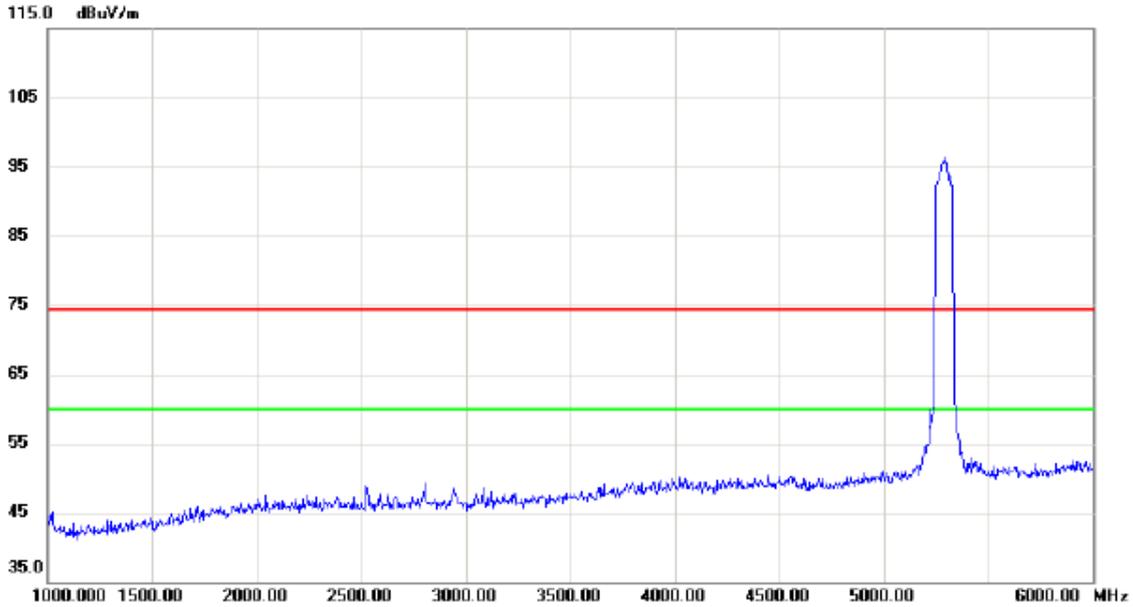


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

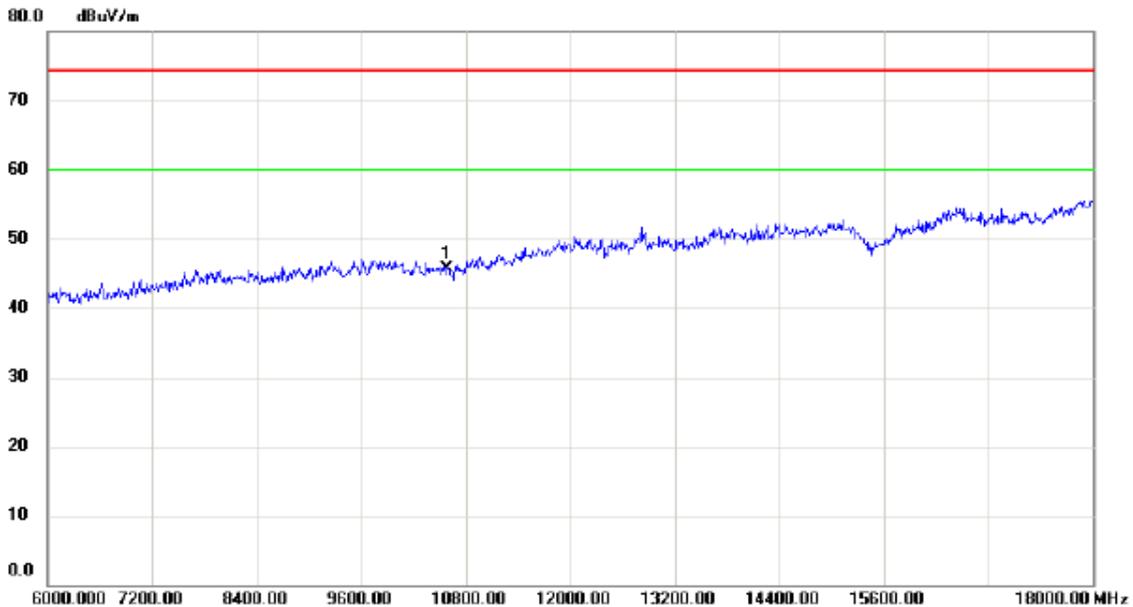


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	31.78	14.00	45.78	74.30	-28.52	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Vertical

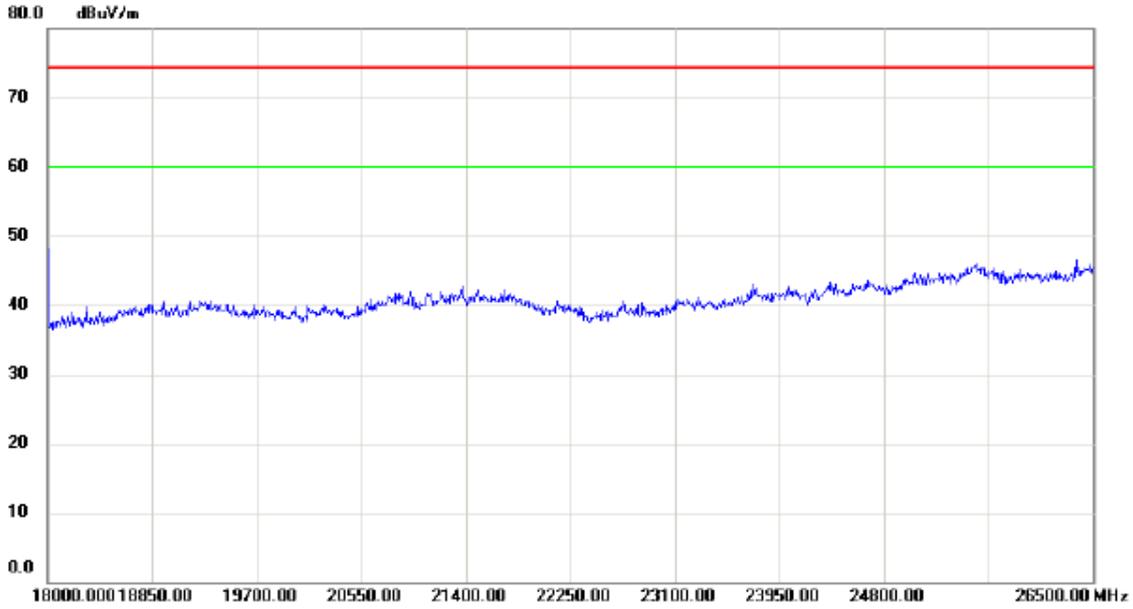


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

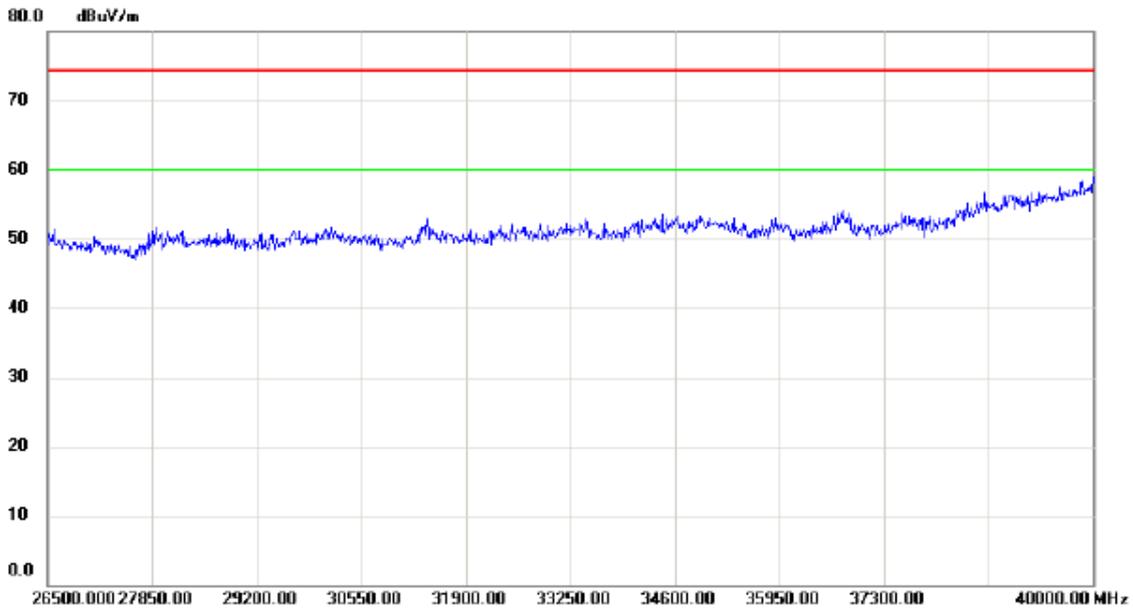

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Horizontal

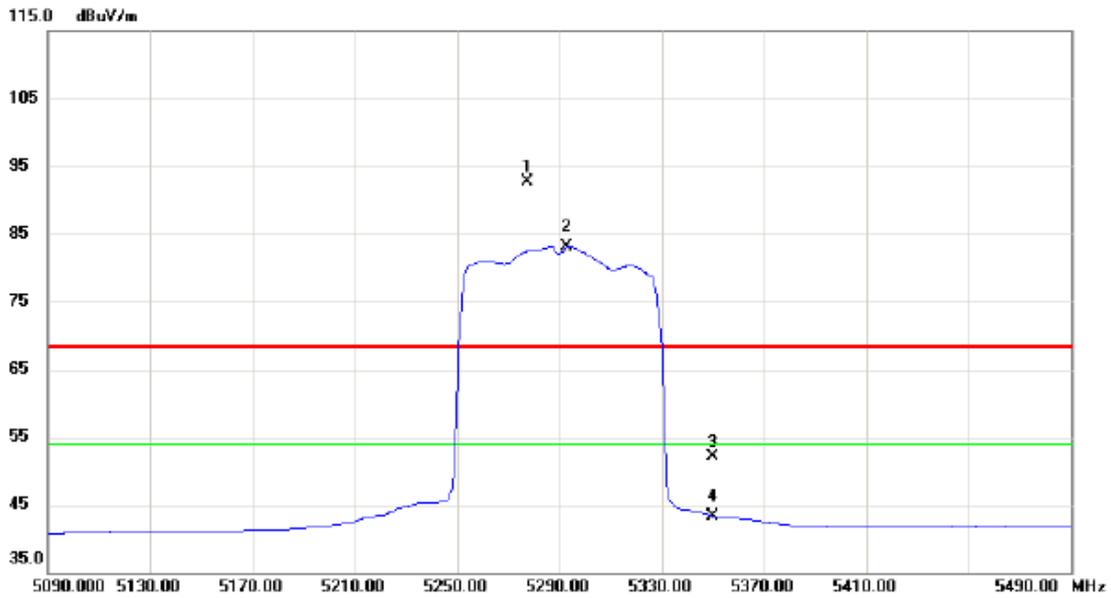


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5277.600	51.63	41.05	92.68	68.30	24.38	peak	No Limit
2	*	5293.200	42.10	41.09	83.19	54.00	29.19	AVG	No Limit
3		5350.000	10.76	41.28	52.04	68.30	-16.26	peak	
4		5350.000	2.12	41.28	43.40	54.00	-10.60	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal

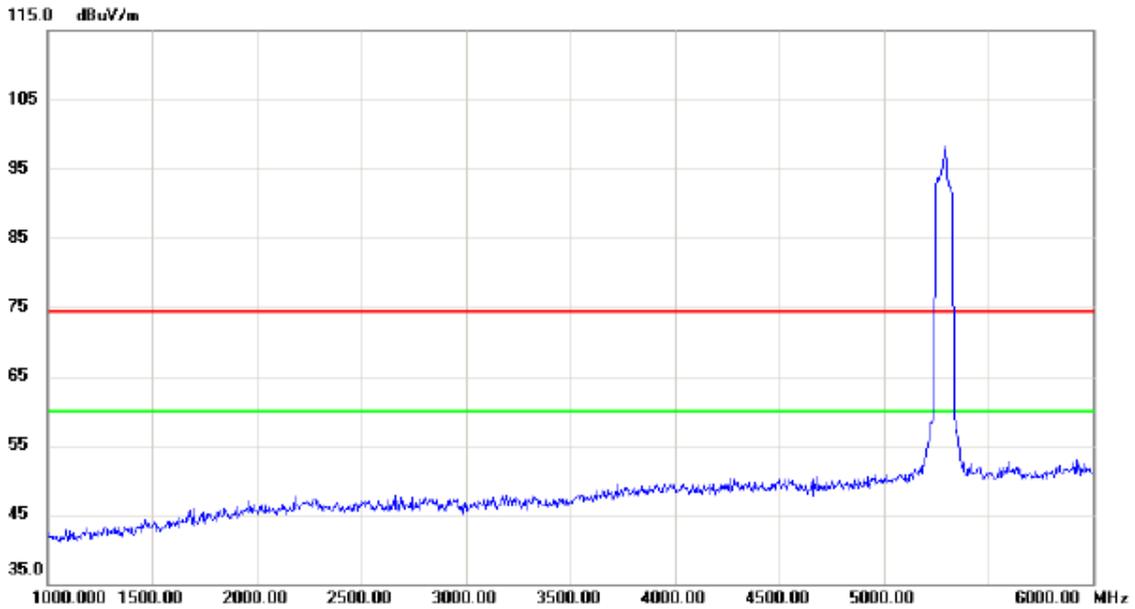


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

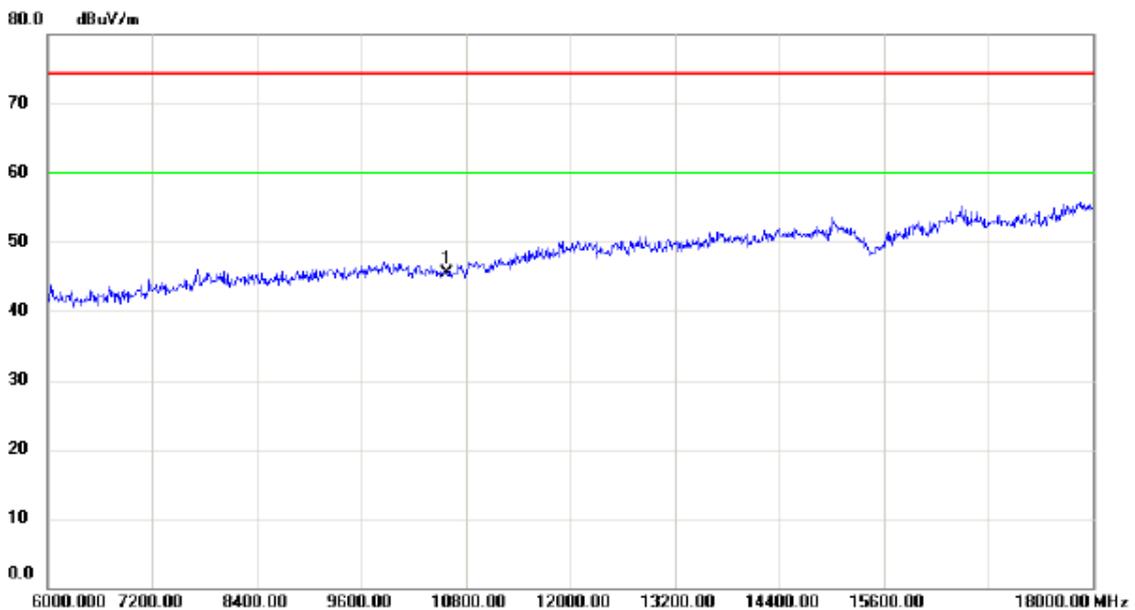


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10580.00	31.57	14.00	45.57	74.30	-28.73	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal

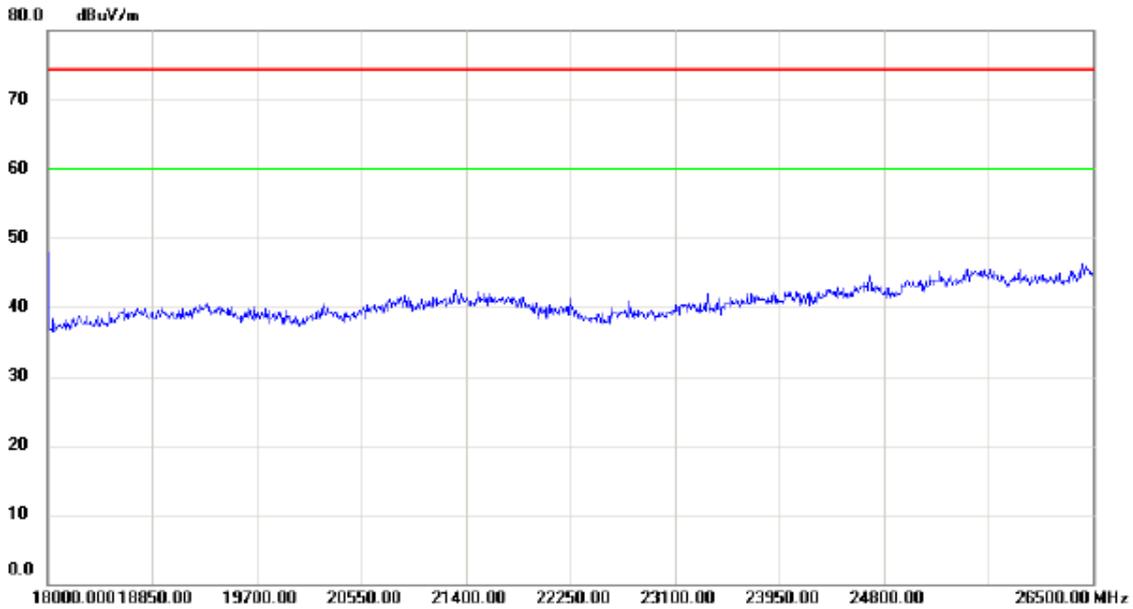


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

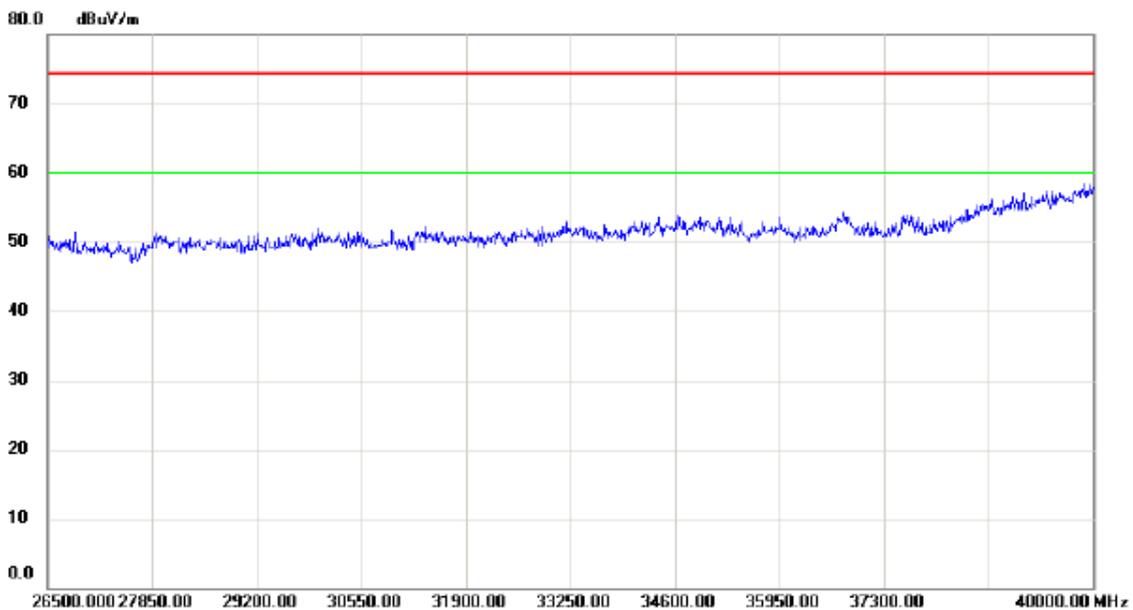

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Vertical

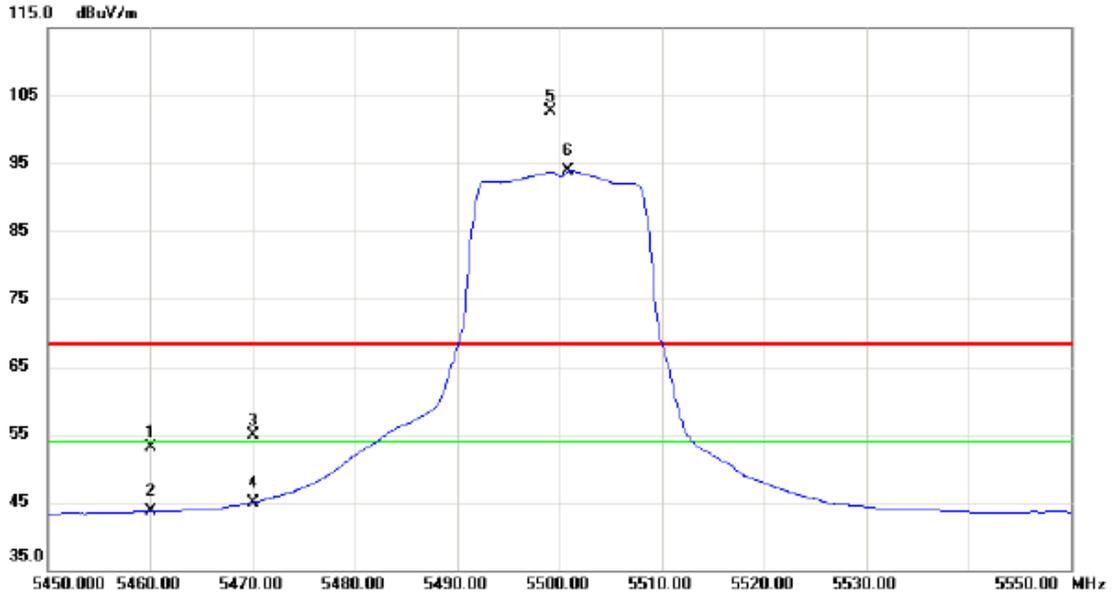


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	11.42	41.64	53.06	68.30	-15.24	peak	
2		5460.000	2.03	41.64	43.67	54.00	-10.33	AVG	
3		5470.000	13.21	41.68	54.89	68.30	-13.41	peak	
4		5470.000	3.29	41.68	44.97	54.00	-9.03	AVG	
5	X	5499.200	60.90	41.78	102.68	68.30	34.38	peak	No Limit
6	*	5500.900	52.03	41.78	93.81	54.00	39.81	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

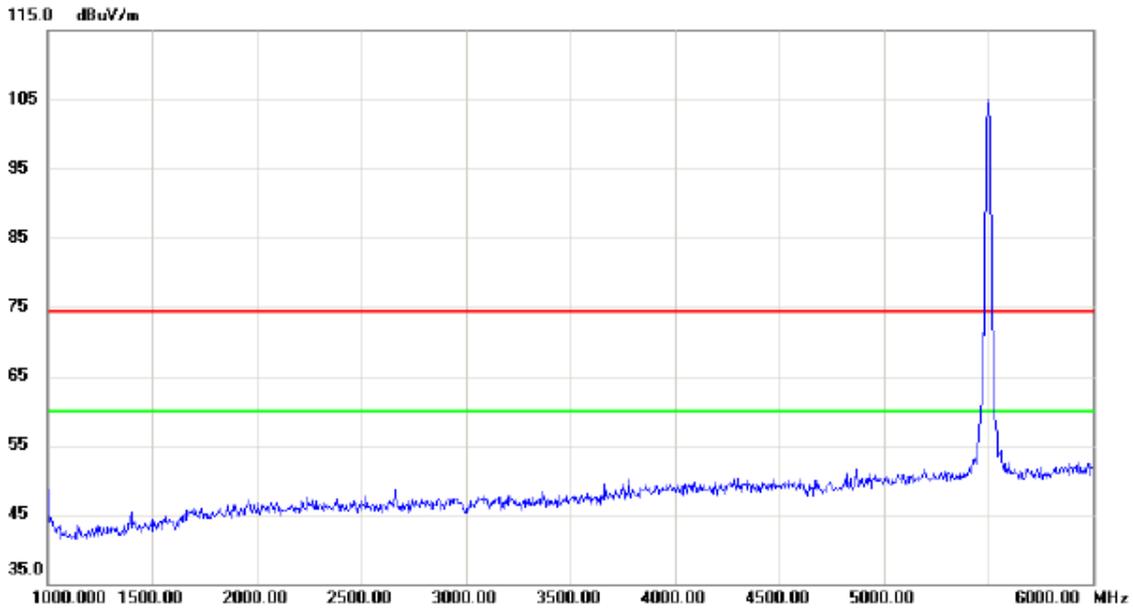


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

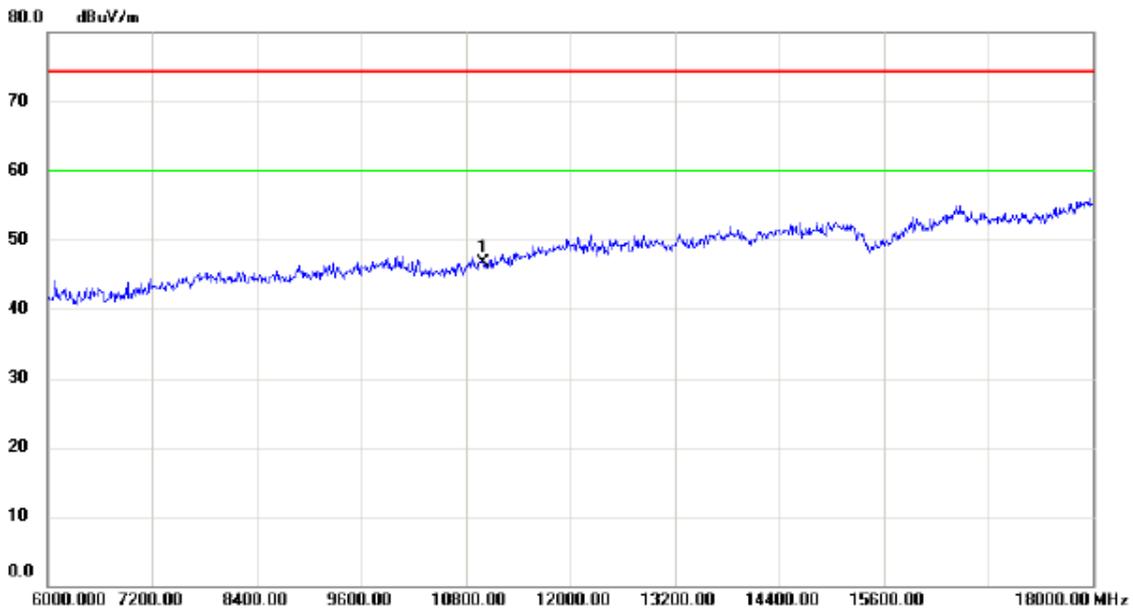


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	11000.00	31.01	15.75	46.76	74.30	-27.54	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

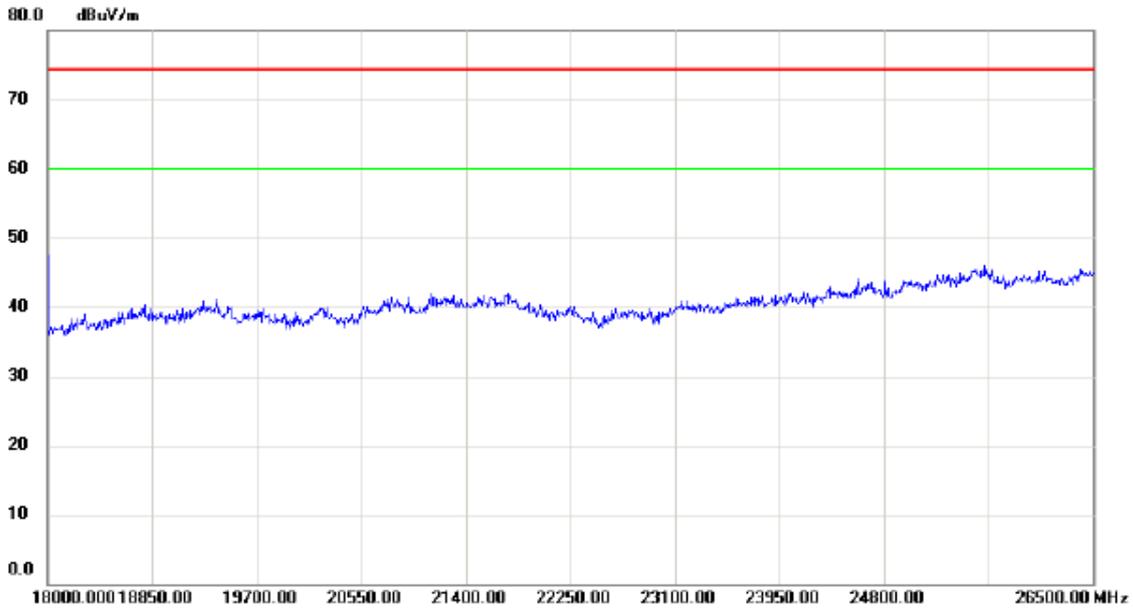


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

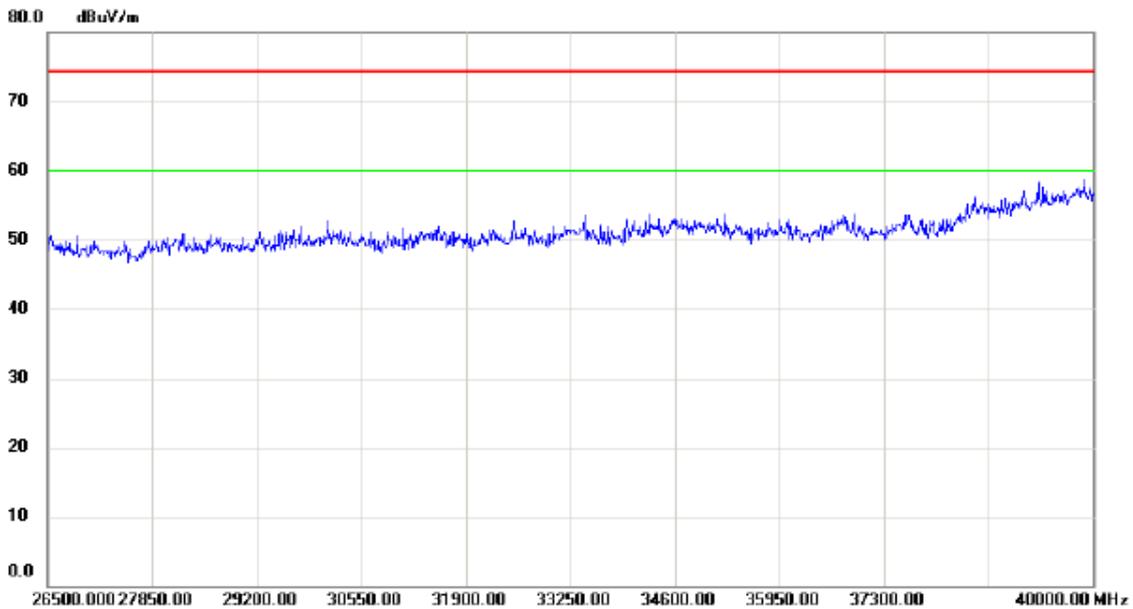

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Horizontal

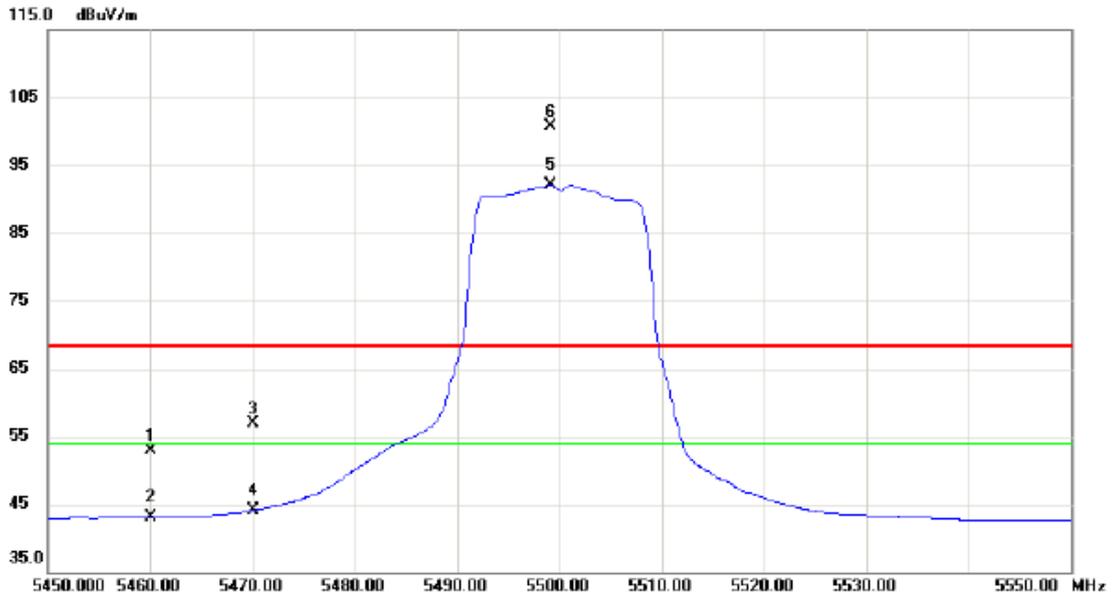


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	11.33	41.64	52.97	68.30	-15.33	peak	
2		5460.000	1.52	41.64	43.16	54.00	-10.84	AVG	
3		5470.000	15.25	41.68	56.93	68.30	-11.37	peak	
4		5470.000	2.41	41.68	44.09	54.00	-9.91	AVG	
5	*	5499.100	50.33	41.78	92.11	54.00	38.11	AVG	No Limit
6	X	5499.200	58.83	41.78	100.61	68.30	32.31	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

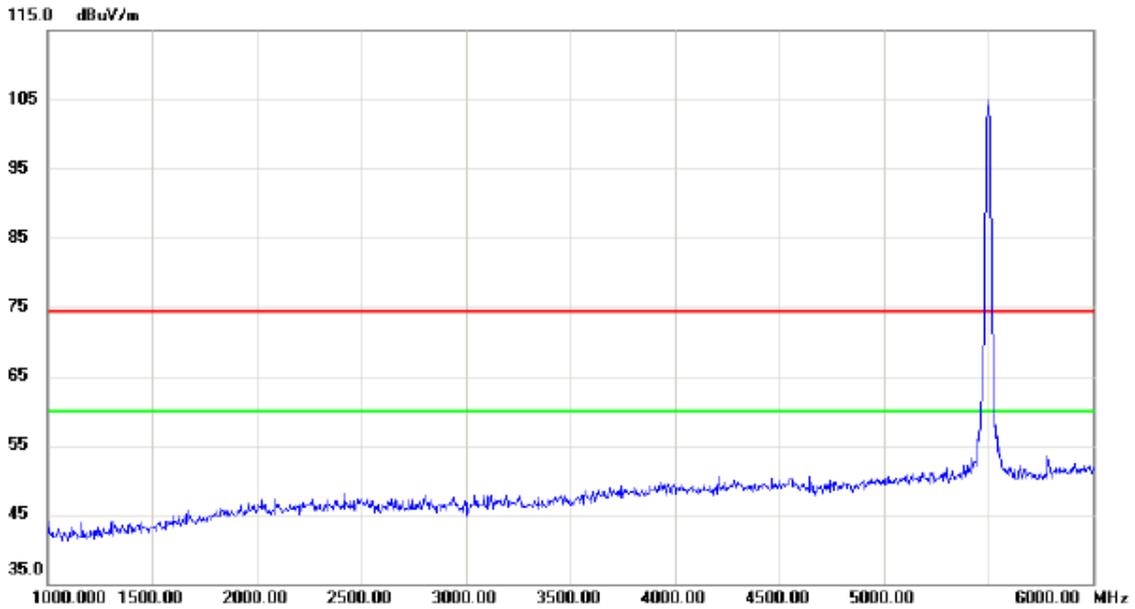


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

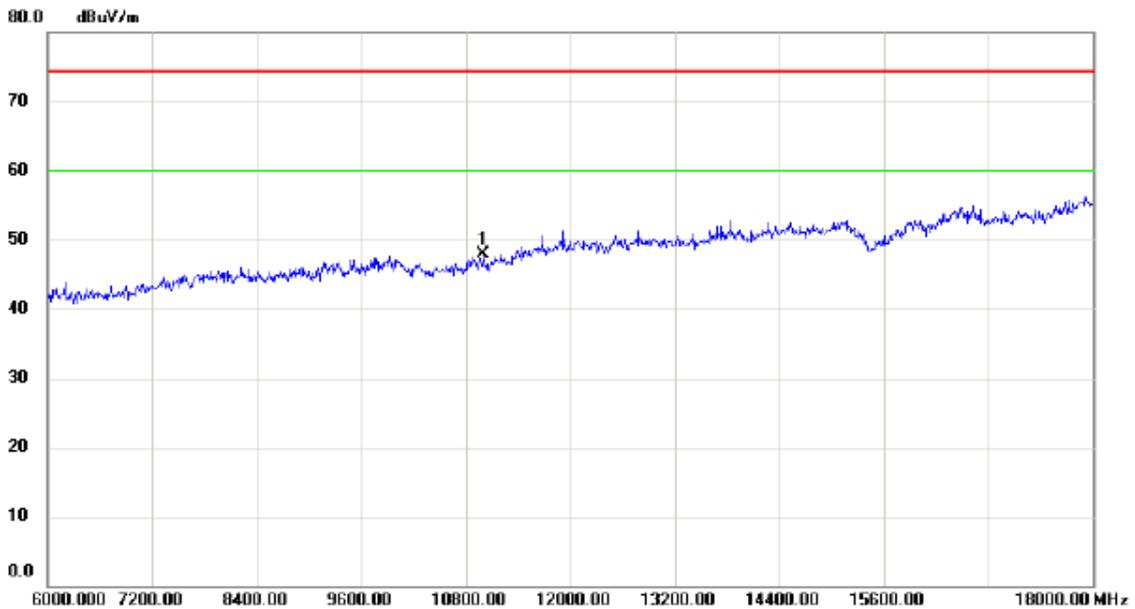


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	11000.00	32.15	15.75	47.90	74.30	-26.40	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

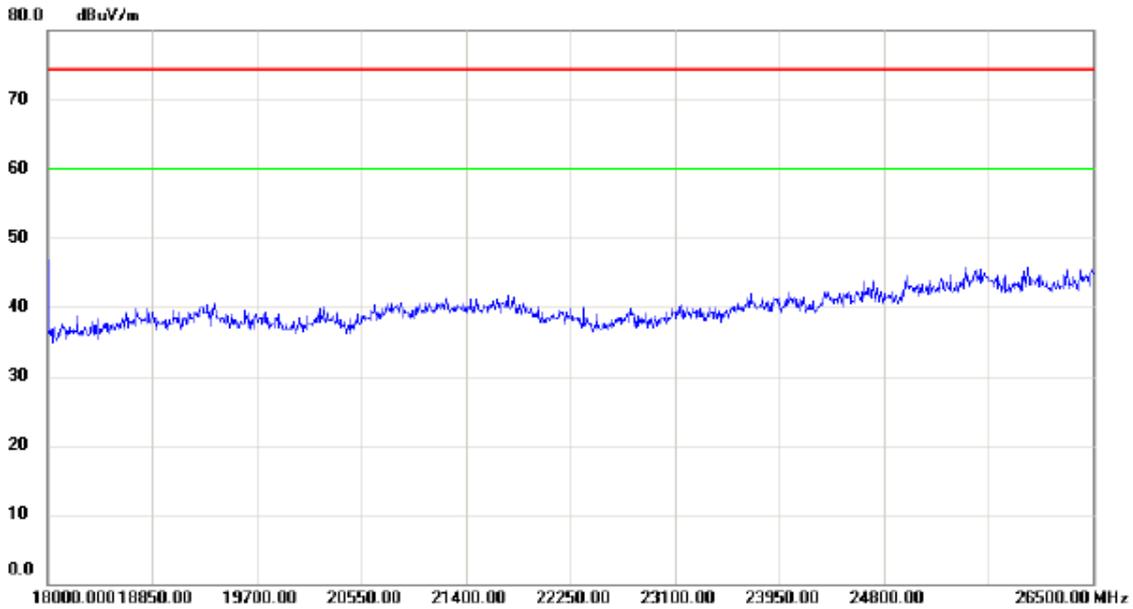


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

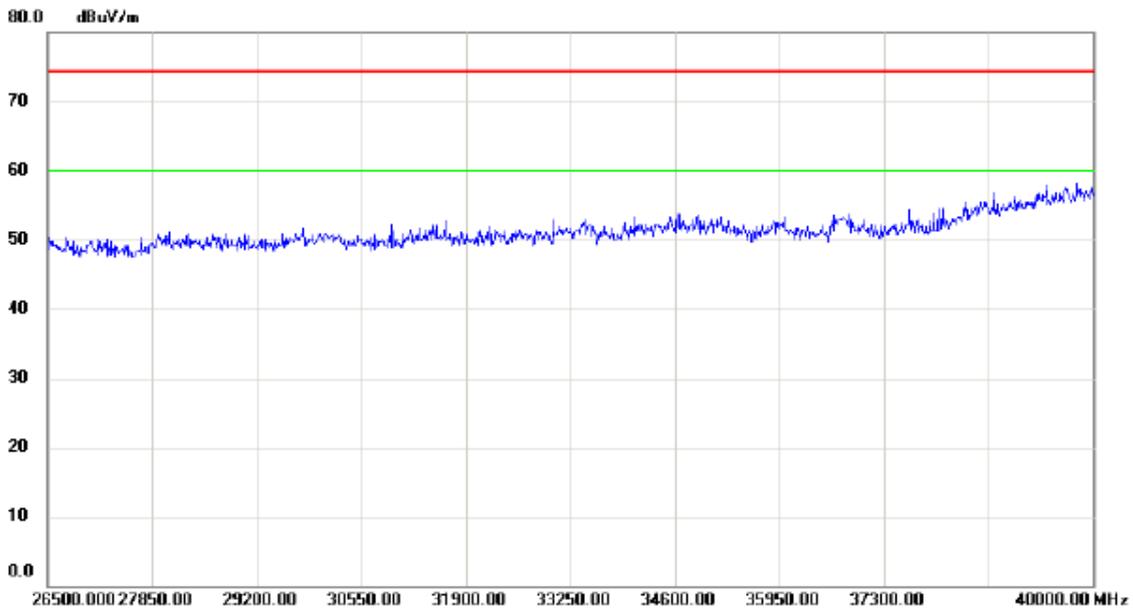

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Vertical

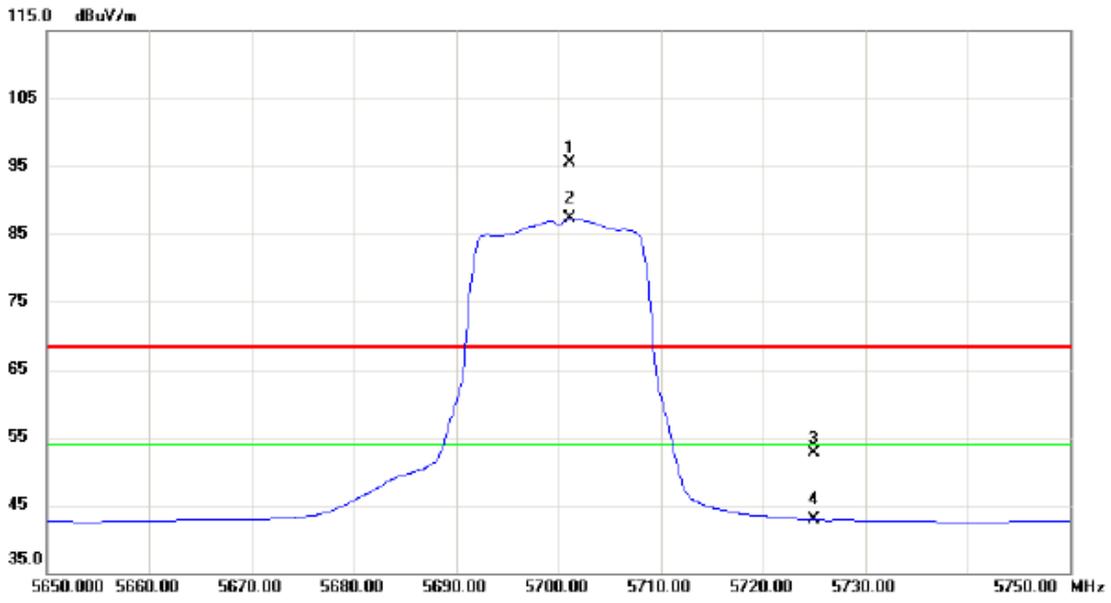


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5701.200	52.97	42.49	95.46	68.30	27.16	peak	No Limit
2	*	5701.200	44.88	42.49	87.37	54.00	33.37	AVG	No Limit
3		5725.000	10.18	42.58	52.76	68.30	-15.54	peak	
4		5725.000	0.30	42.58	42.88	54.00	-11.12	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

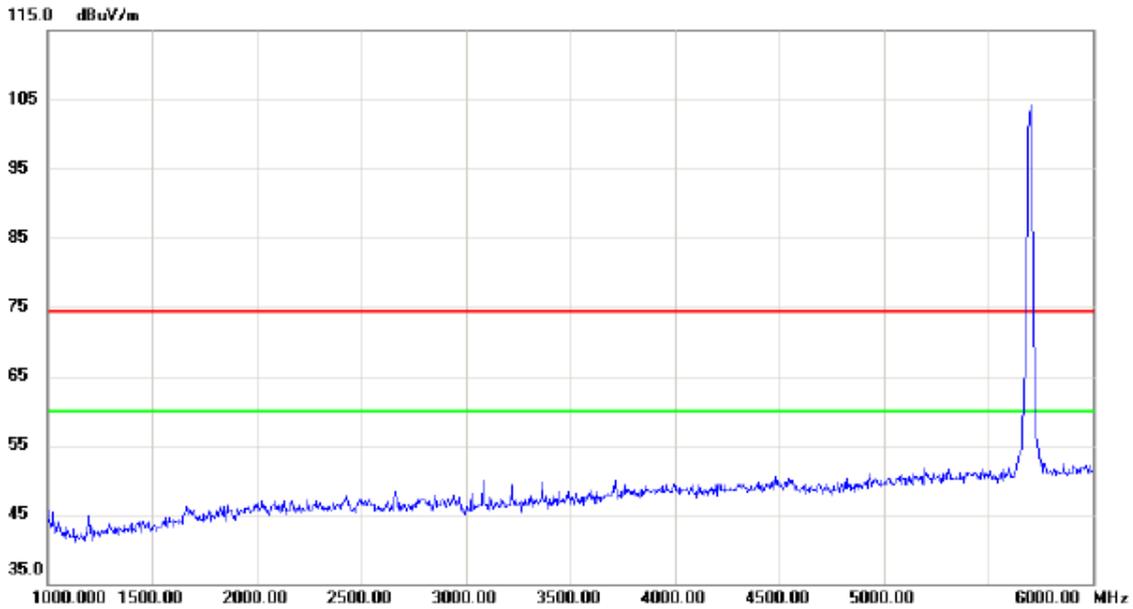


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

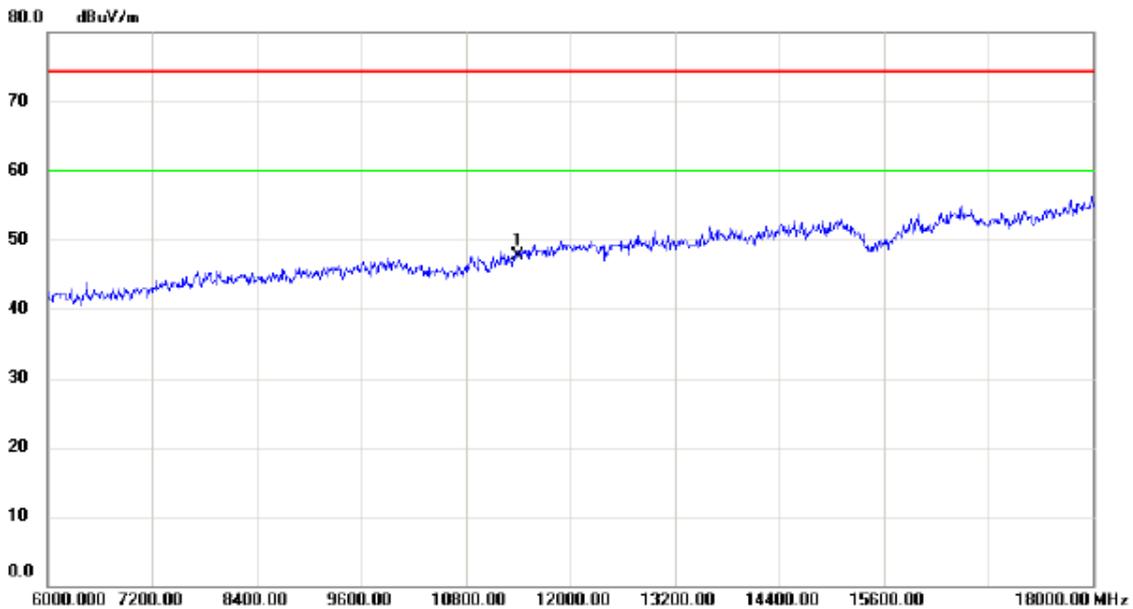


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	11400.00	30.96	16.70	47.66	74.30	-26.64	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

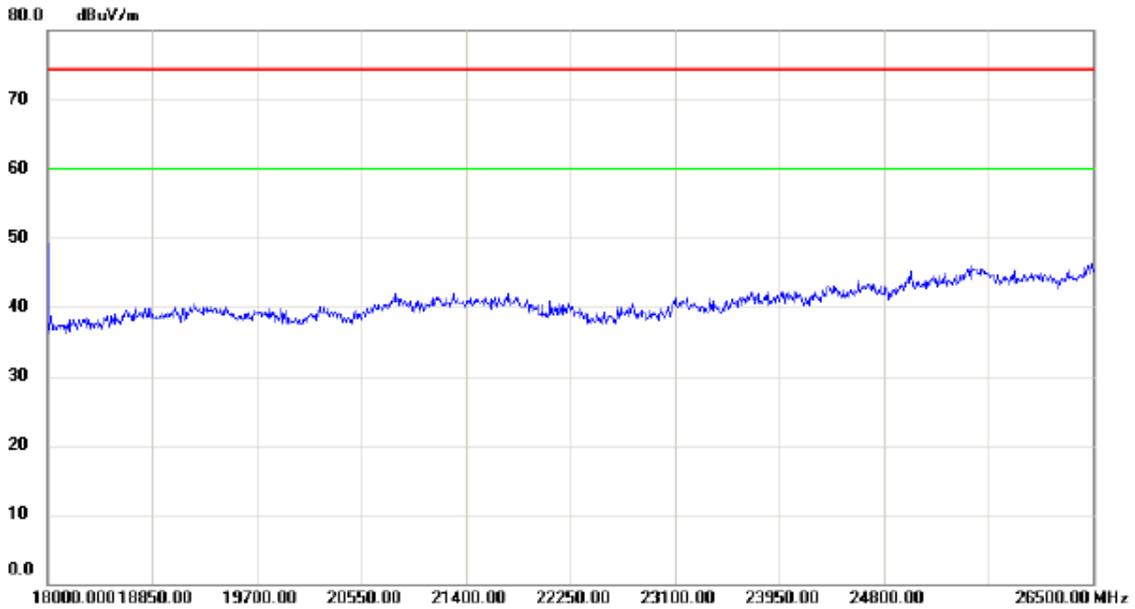


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

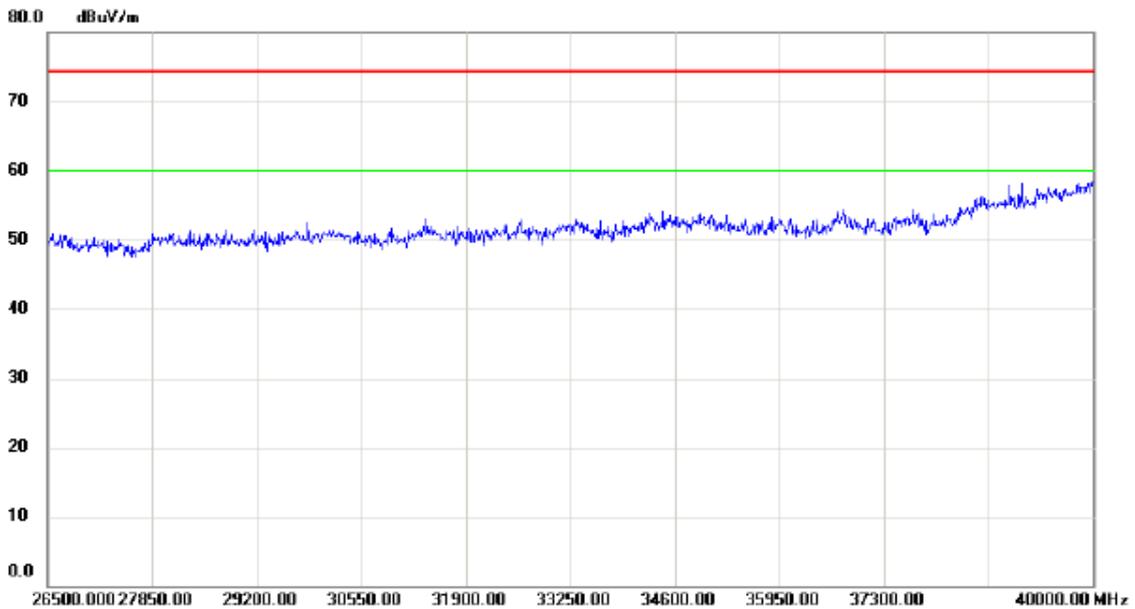

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Horizontal

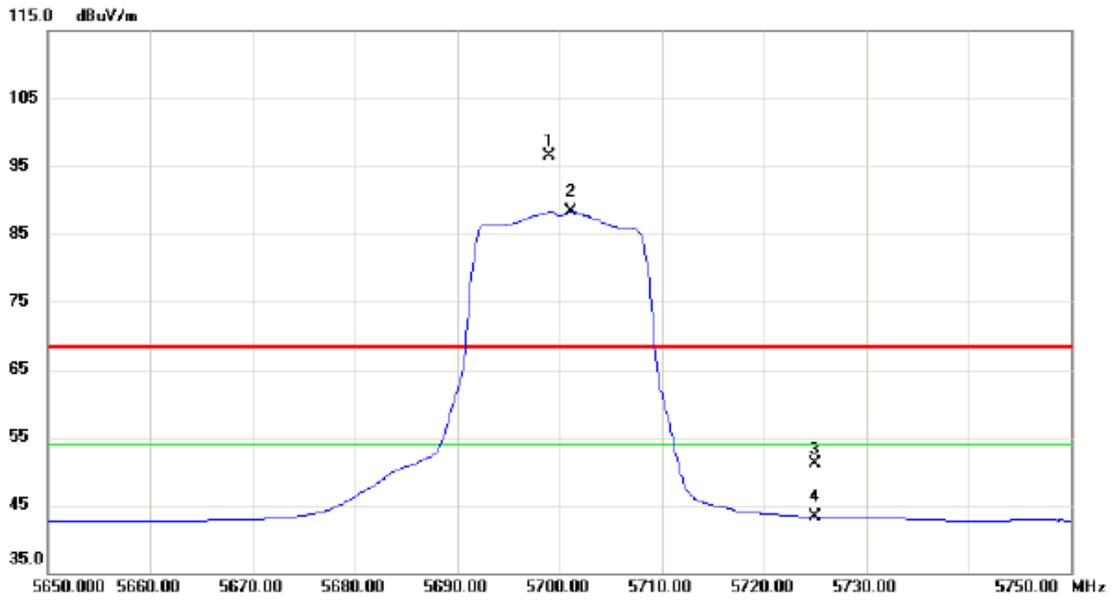


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5699.000	54.00	42.49	96.49	68.30	28.19	peak	No Limit
2	*	5701.100	45.86	42.49	88.35	54.00	34.35	AVG	No Limit
3		5725.000	8.46	42.58	51.04	68.30	-17.26	peak	
4		5725.000	0.76	42.58	43.34	54.00	-10.66	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal

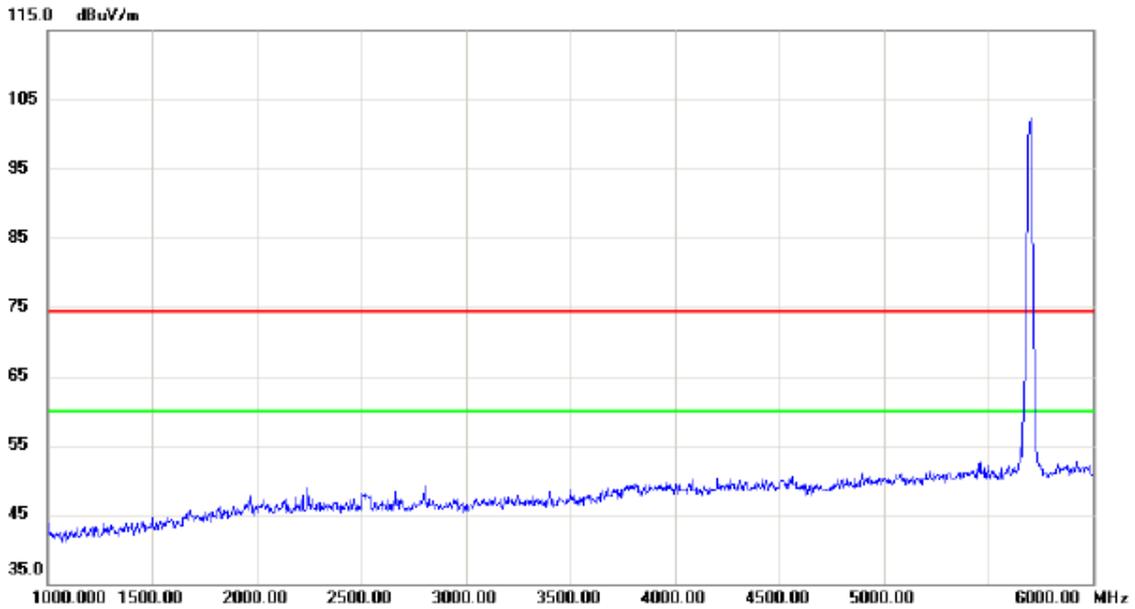


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

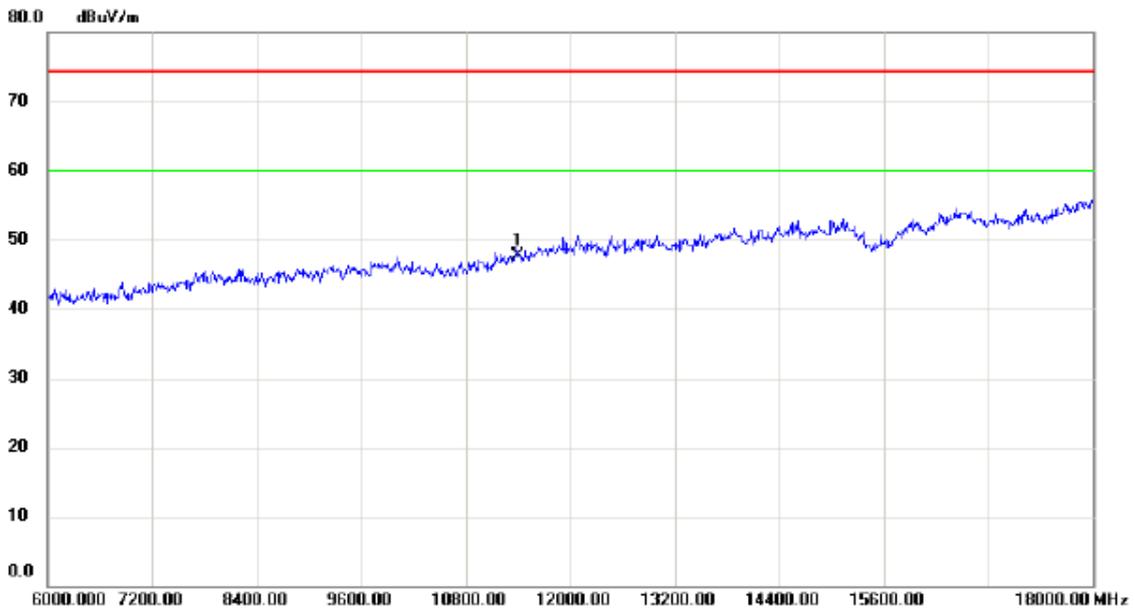


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	11400.00	31.07	16.70	47.77	74.30	-26.53	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal

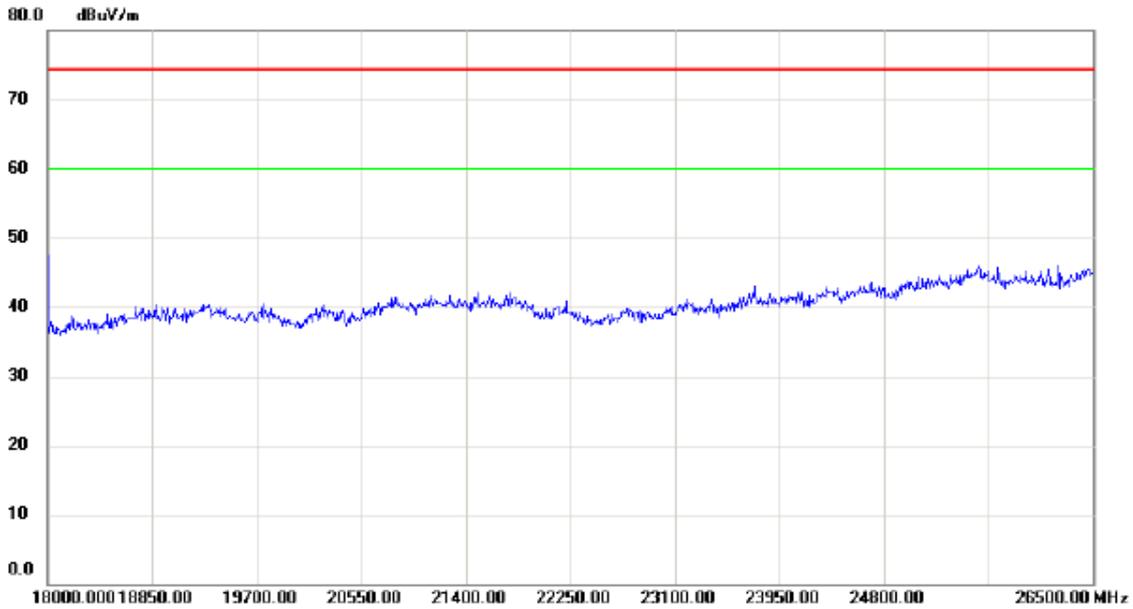


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

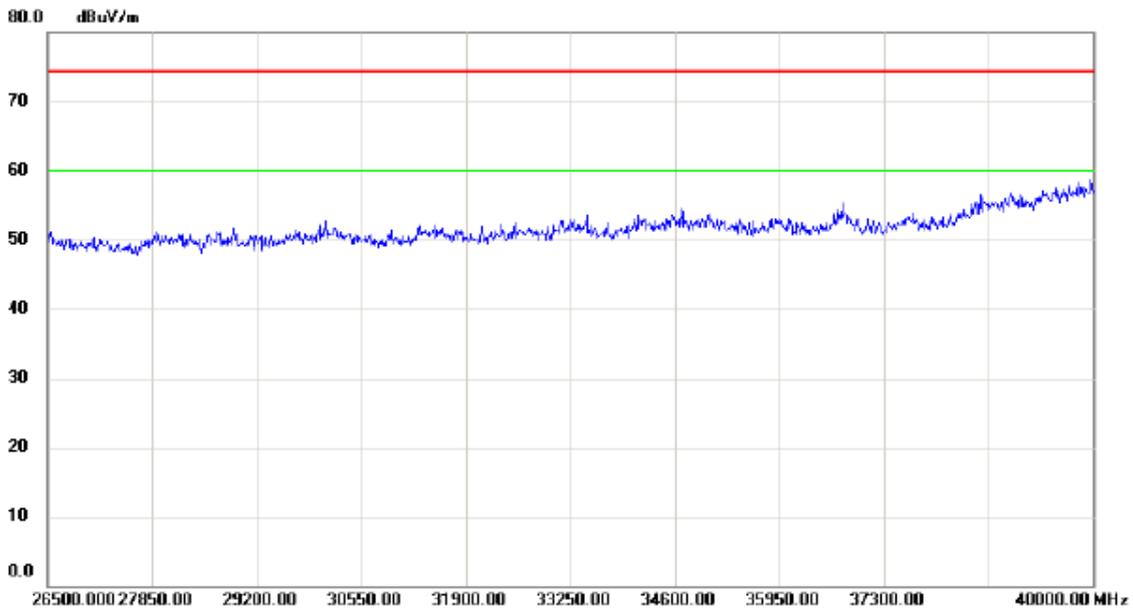

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Vertical

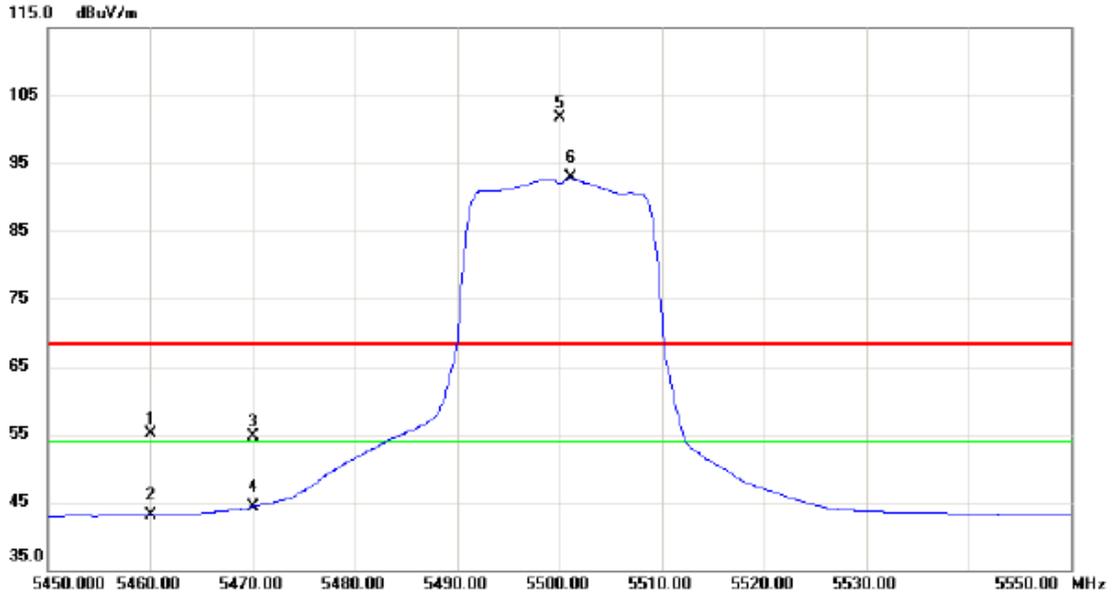


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	13.39	41.64	55.03	68.30	-13.27	peak	
2		5460.000	1.54	41.64	43.18	54.00	-10.82	AVG	
3		5470.000	13.03	41.68	54.71	68.30	-13.59	peak	
4		5470.000	2.71	41.68	44.39	54.00	-9.61	AVG	
5	X	5500.000	59.94	41.78	101.72	68.30	33.42	peak	No Limit
6	*	5501.200	51.04	41.78	92.82	54.00	38.82	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical

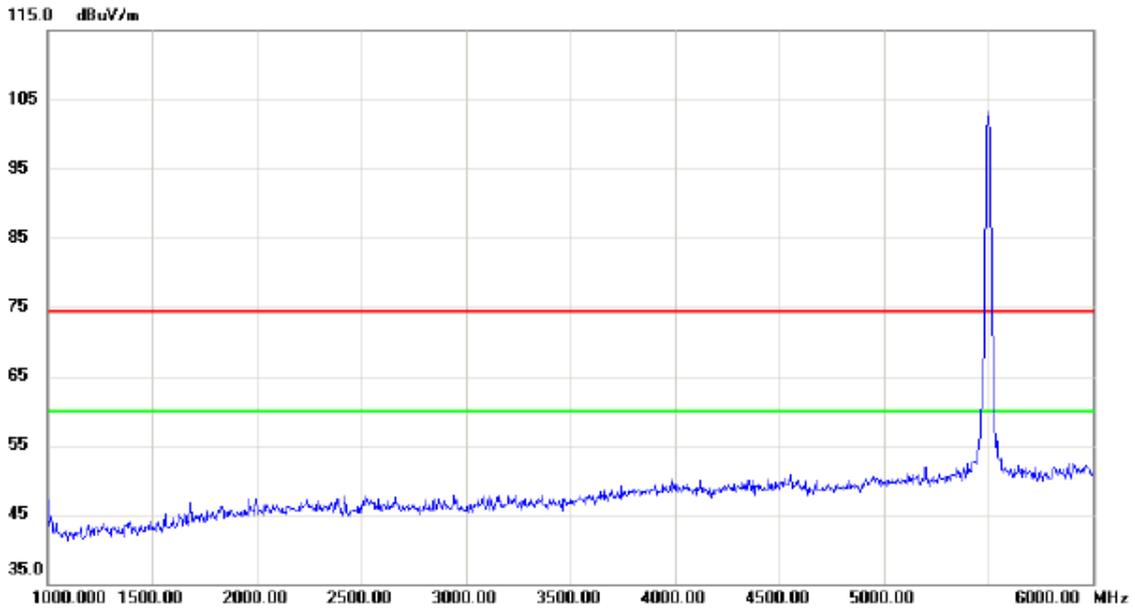


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

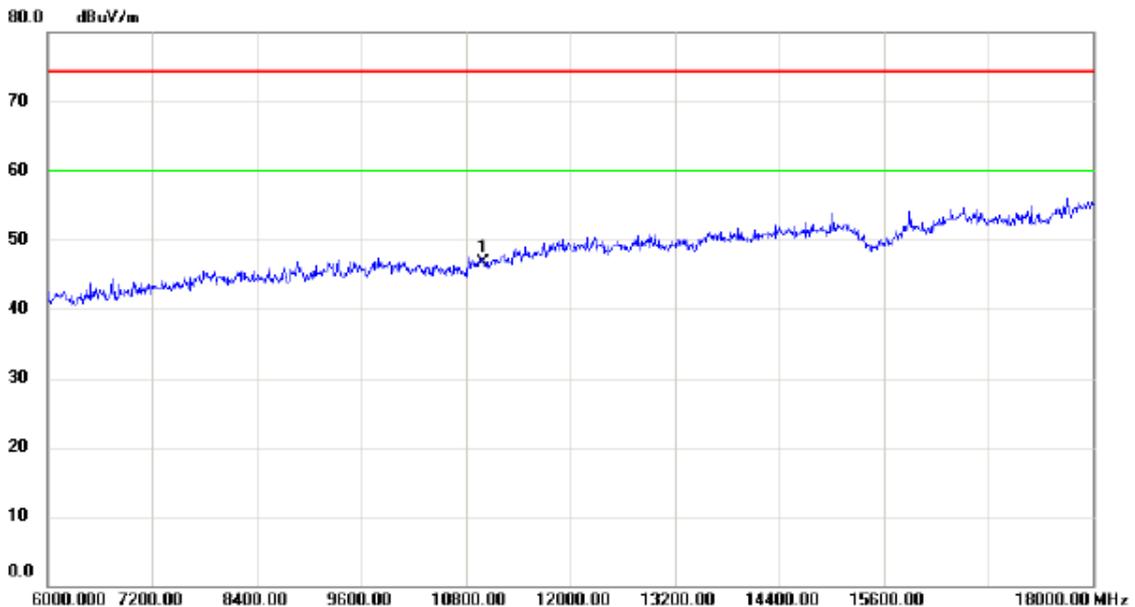


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	11000.00	30.98	15.75	46.73	74.30	-27.57	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical

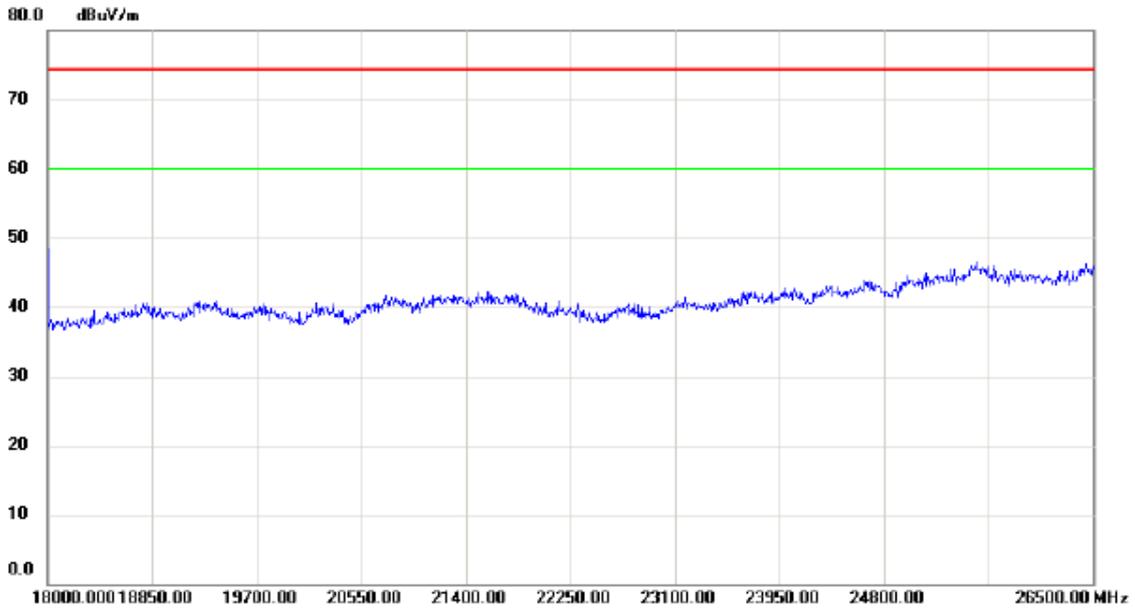


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

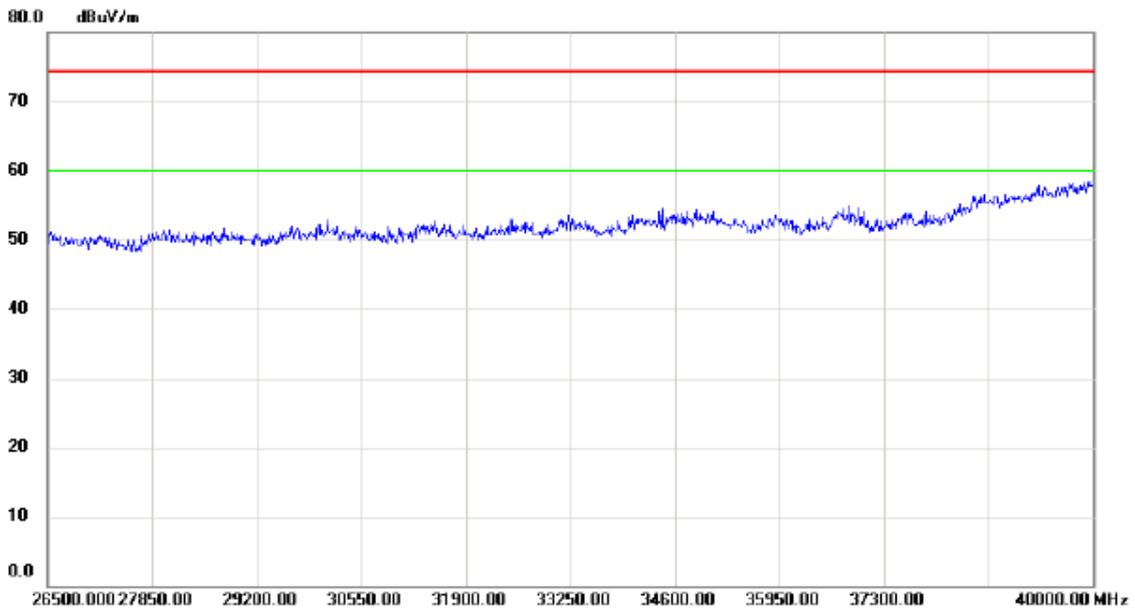

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Horizontal

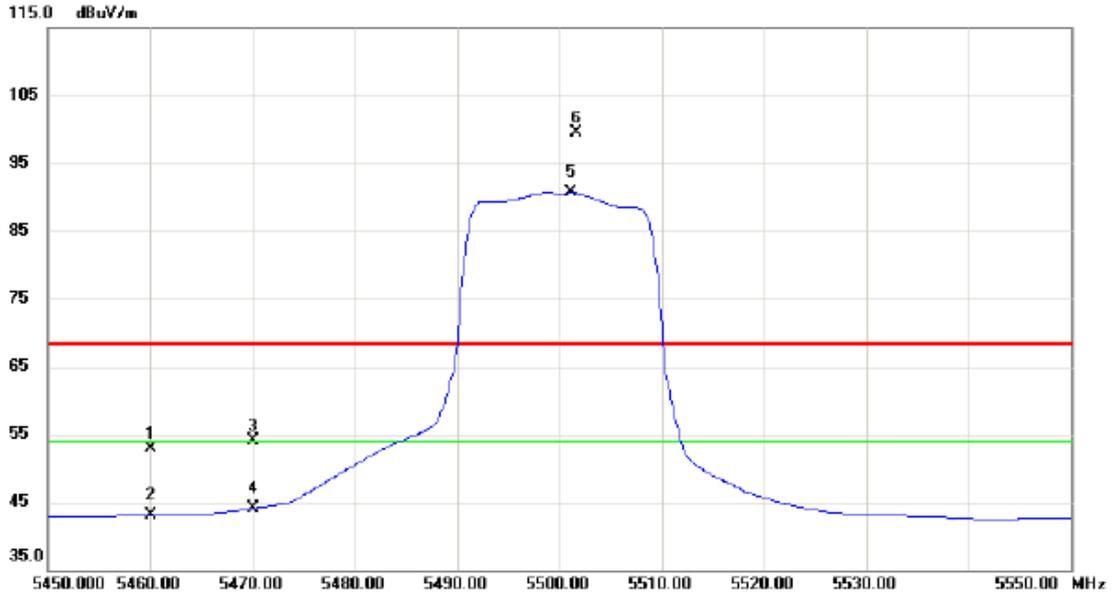


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	11.35	41.64	52.99	68.30	-15.31	peak	
2		5460.000	1.55	41.64	43.19	54.00	-10.81	AVG	
3		5470.000	12.50	41.68	54.18	68.30	-14.12	peak	
4		5470.000	2.41	41.68	44.09	54.00	-9.91	AVG	
5	*	5501.200	48.95	41.78	90.73	54.00	36.73	AVG	No Limit
6	X	5501.700	57.63	41.78	99.41	68.30	31.11	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Horizontal

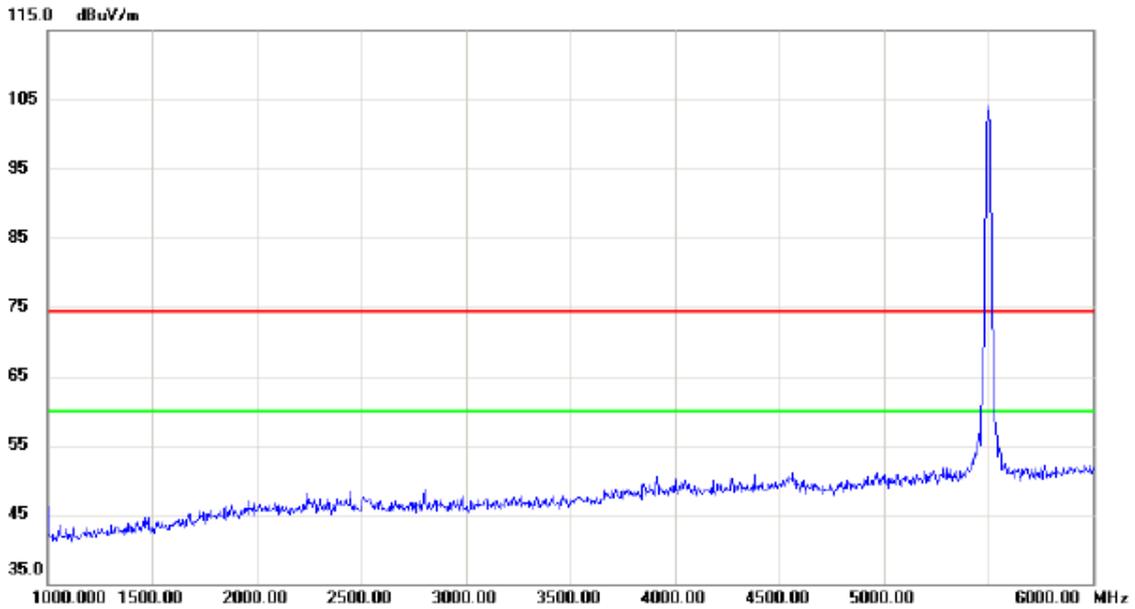


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

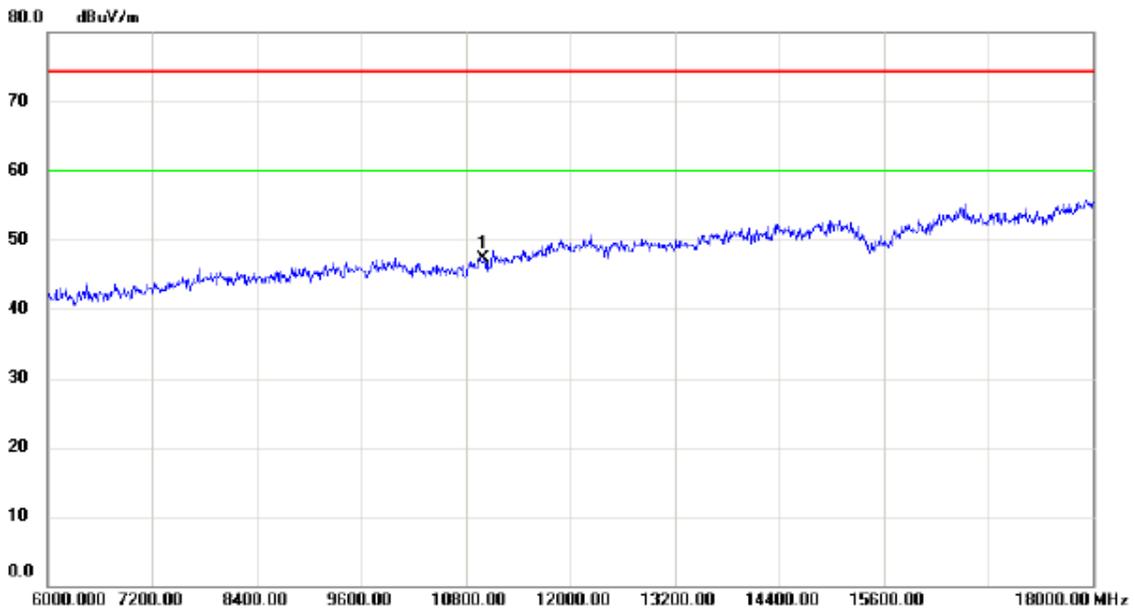


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	11000.00	31.58	15.75	47.33	74.30	-26.97	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Horizontal

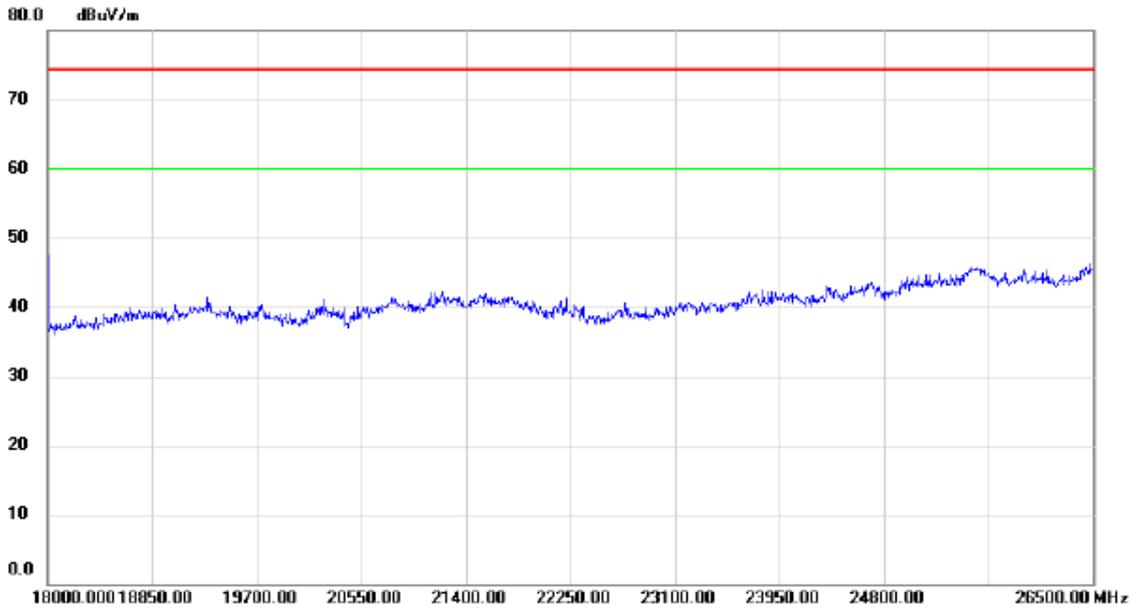


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

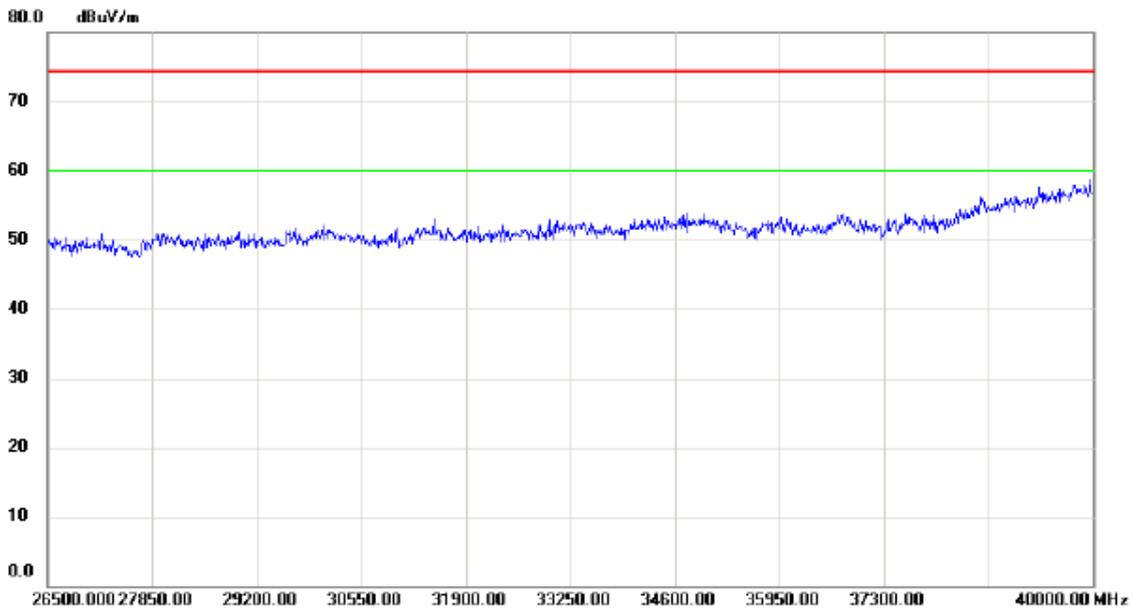

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Vertical

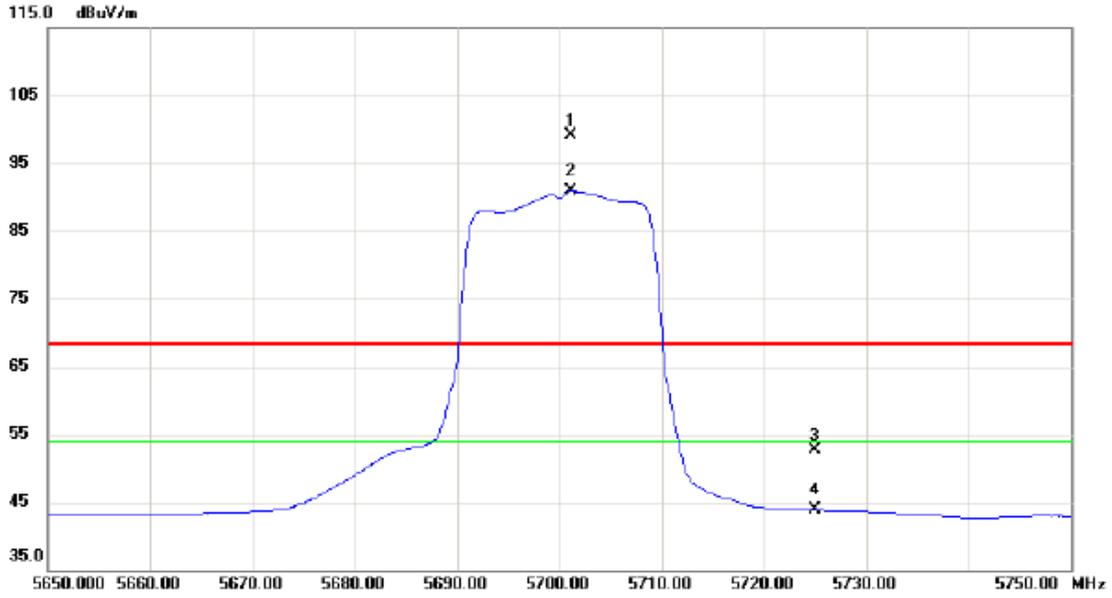


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5701.200	56.53	42.49	99.02	68.30	30.72	peak	No Limit
2	*	5701.200	48.39	42.49	90.88	54.00	36.88	AVG	No Limit
3		5725.000	10.06	42.58	52.64	68.30	-15.66	peak	
4		5725.000	1.24	42.58	43.82	54.00	-10.18	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical

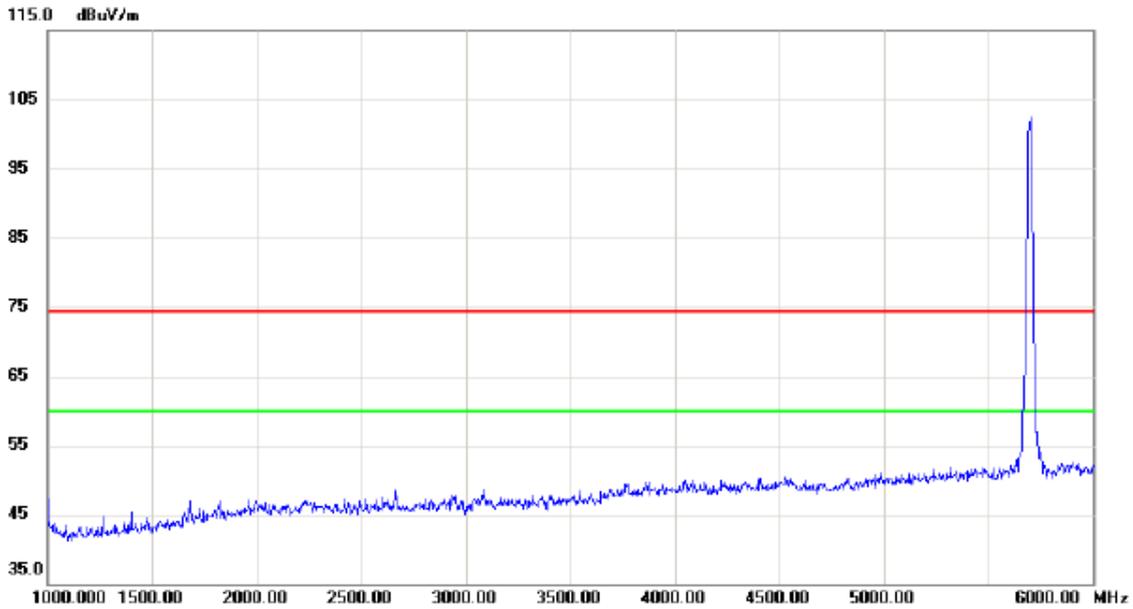


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

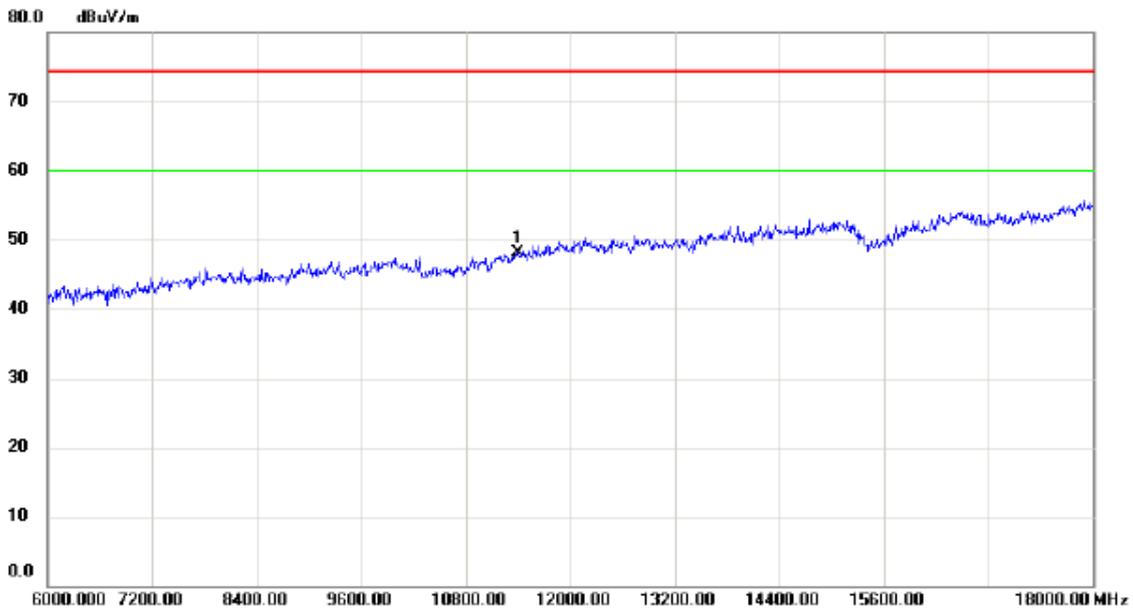


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	11400.00	31.38	16.70	48.08	74.30	-26.22	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical

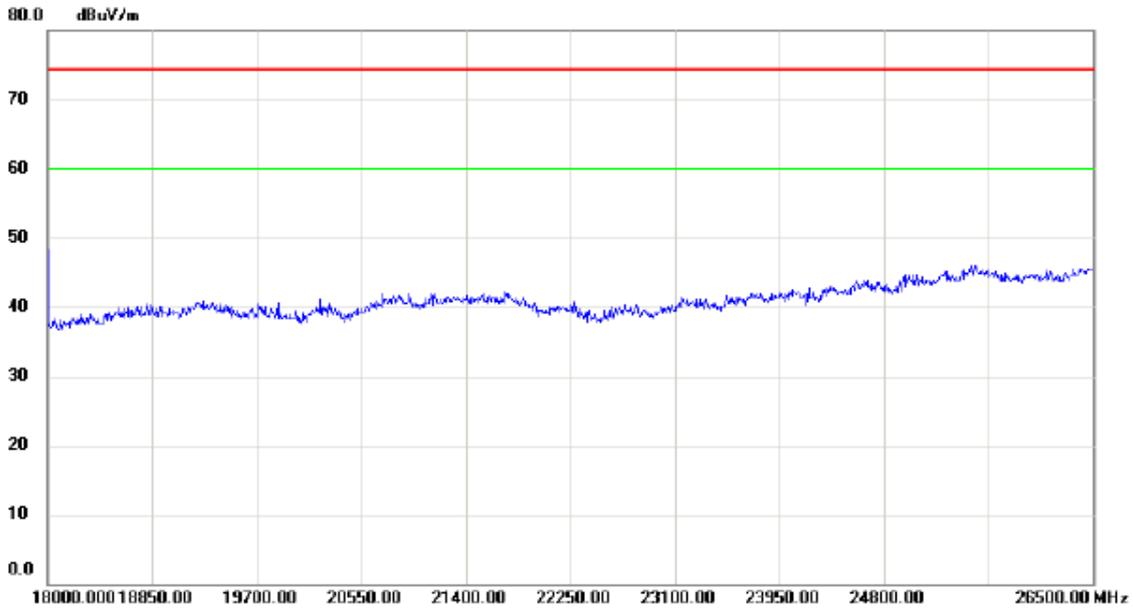


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

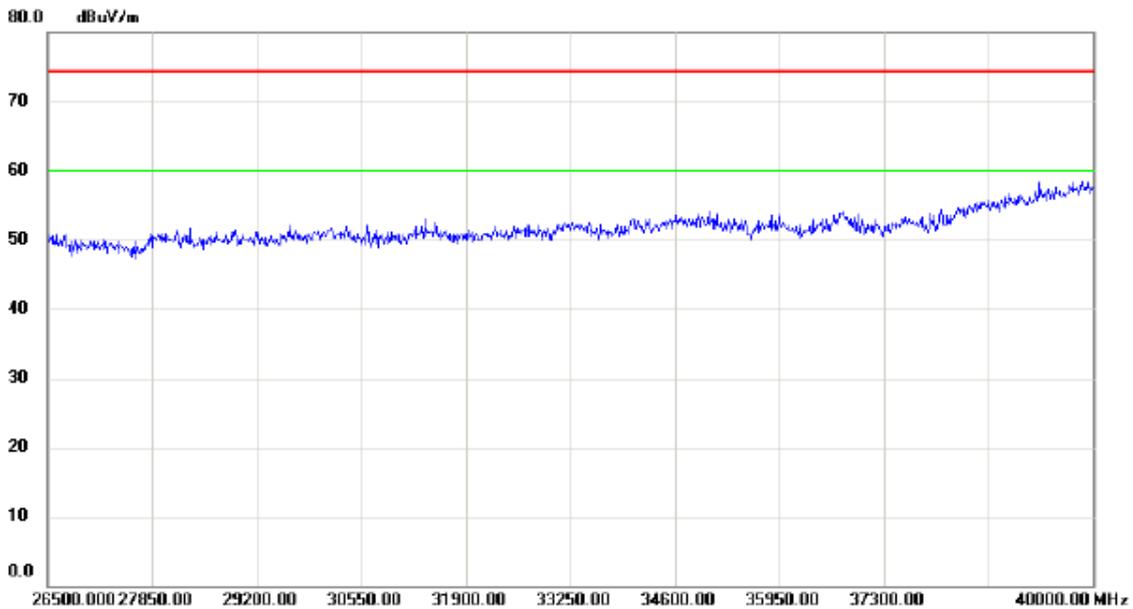

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Horizontal

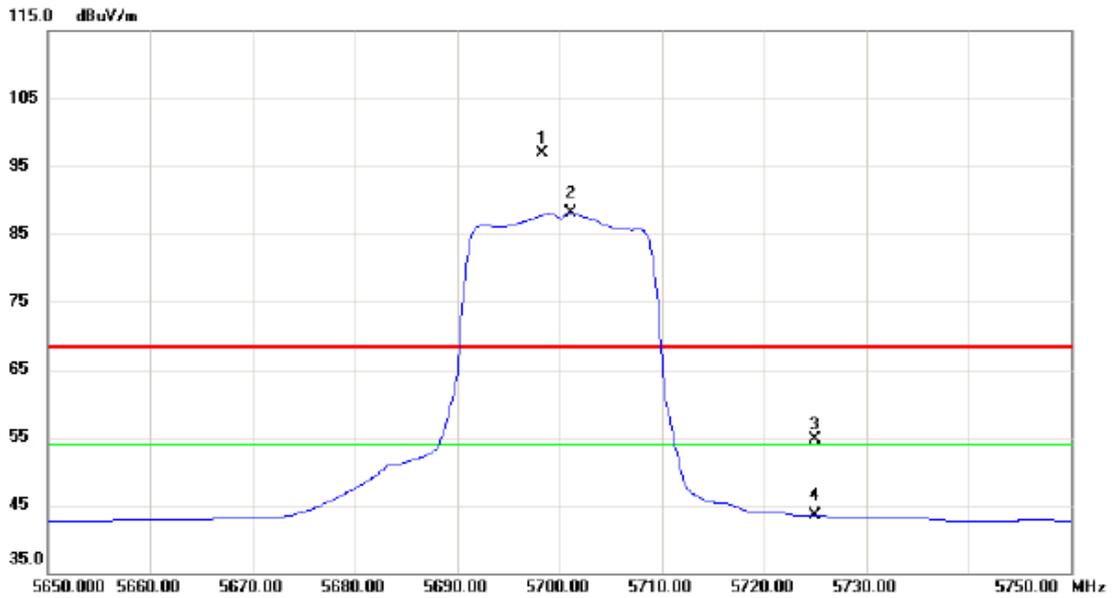


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5698.400	54.48	42.49	96.97	68.30	28.67	peak	No Limit
2	*	5701.100	45.61	42.49	88.10	54.00	34.10	AVG	No Limit
3		5725.000	12.11	42.58	54.69	68.30	-13.61	peak	
4		5725.000	0.90	42.58	43.48	54.00	-10.52	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal

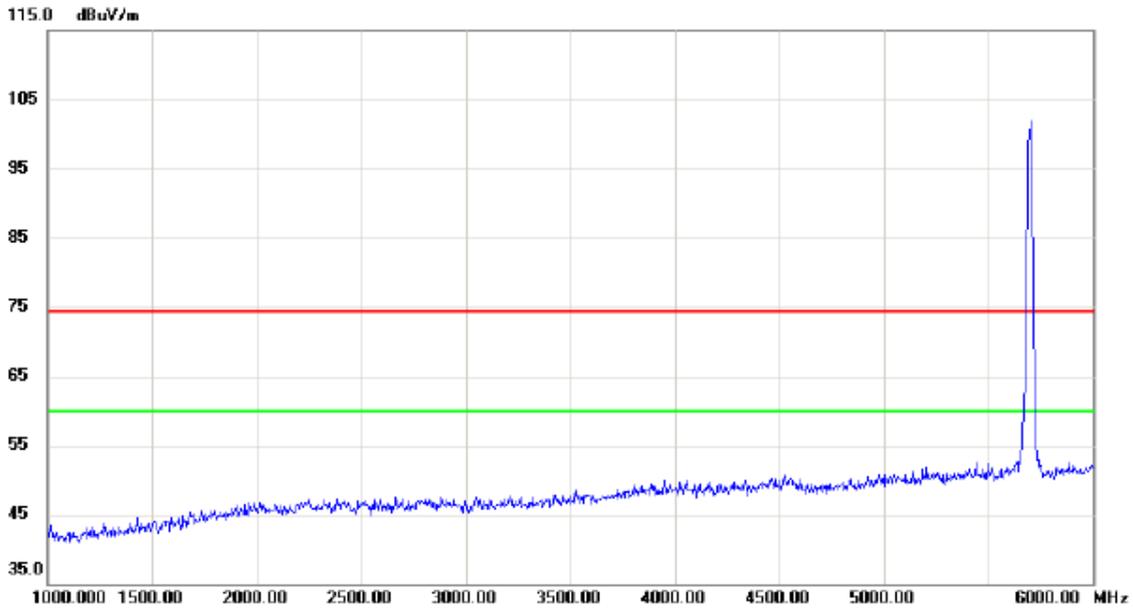


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

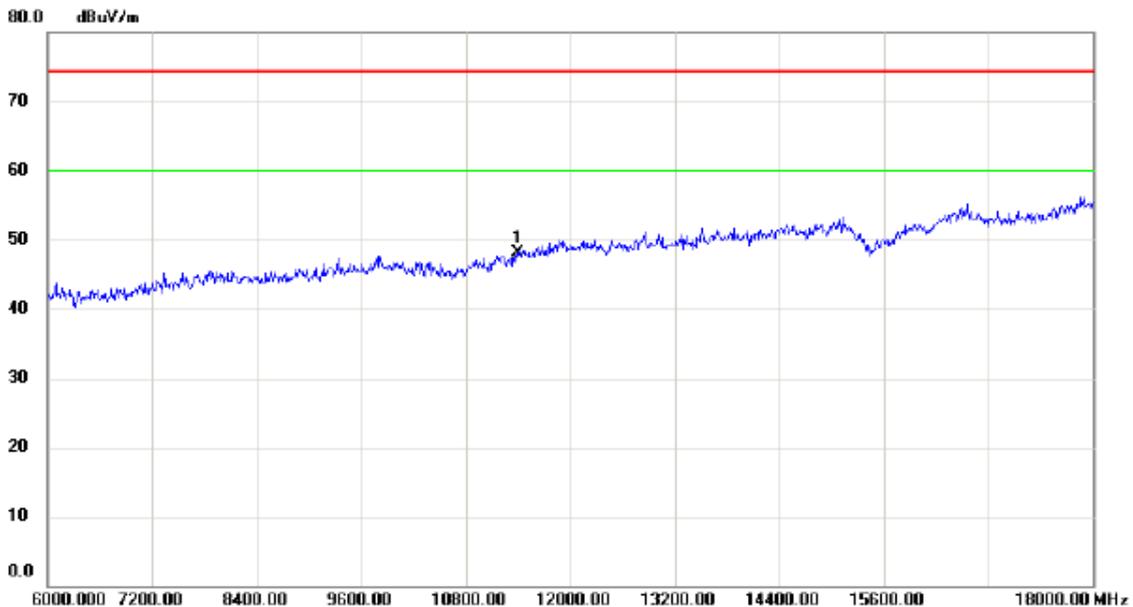


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	11400.00	31.42	16.70	48.12	74.30	-26.18	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal

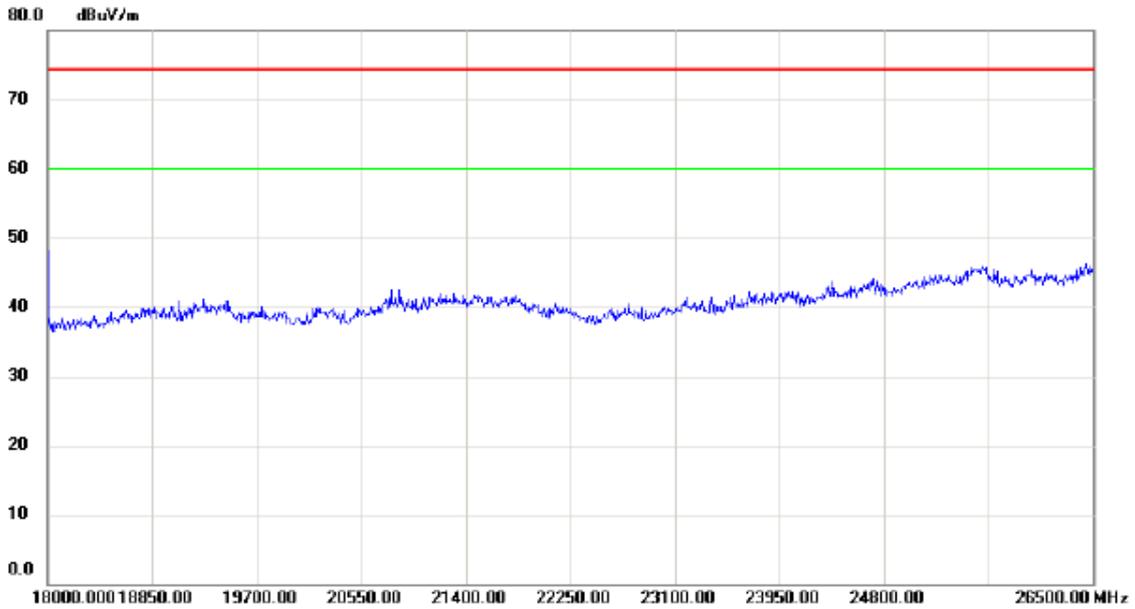


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

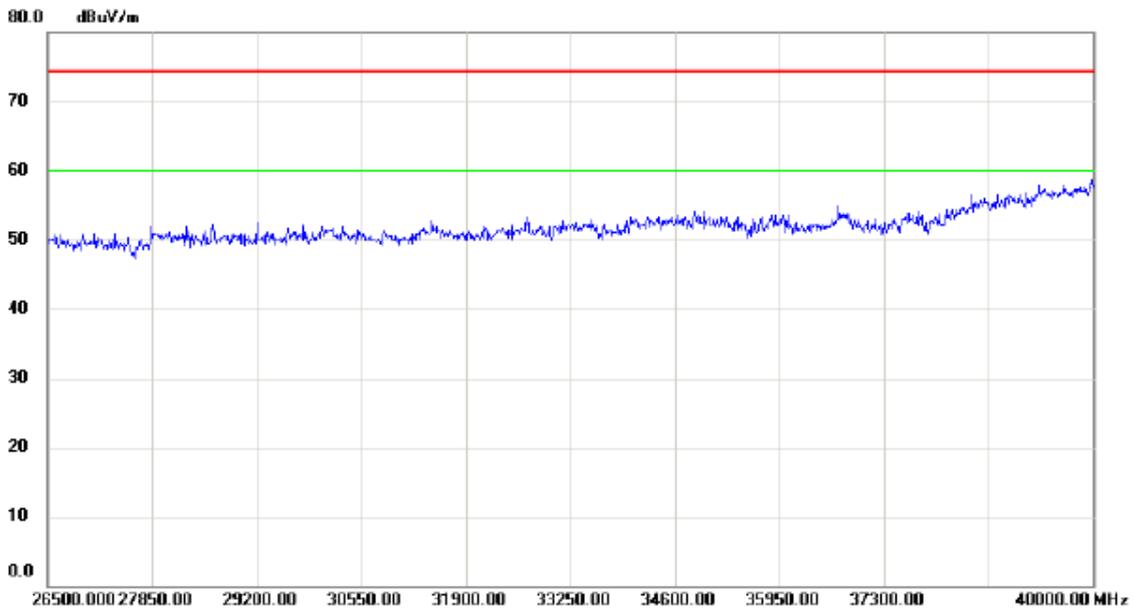

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

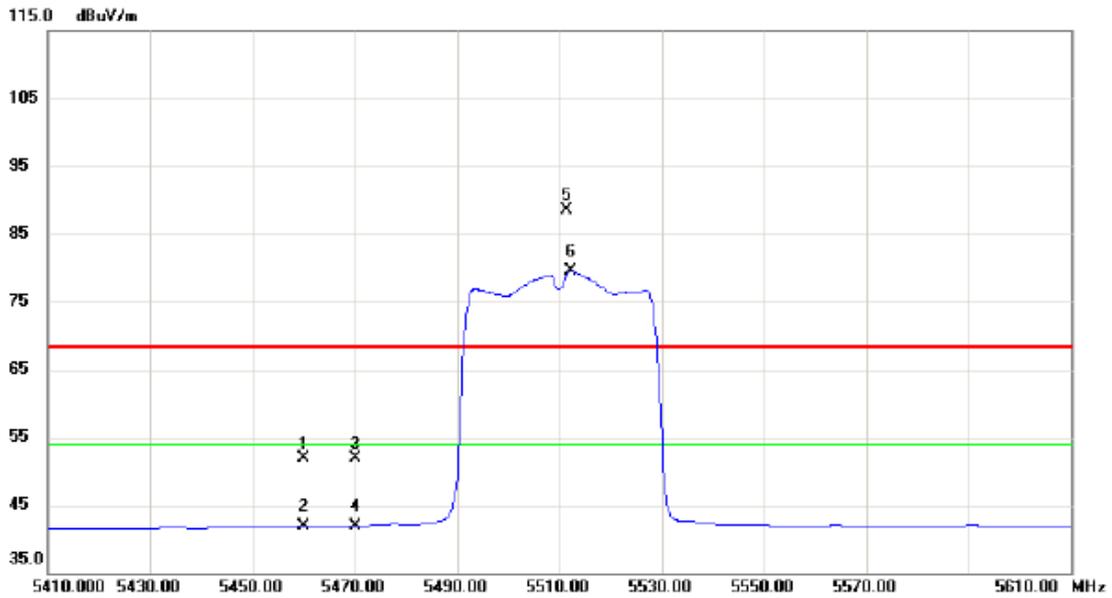

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	10.25	41.64	51.89	68.30	-16.41	peak	
2		5460.000	0.24	41.64	41.88	54.00	-12.12	AVG	
3		5470.000	10.13	41.68	51.81	68.30	-16.49	peak	
4		5470.000	0.19	41.68	41.87	54.00	-12.13	AVG	
5	X	5511.400	46.70	41.82	88.52	68.30	20.22	peak	No Limit
6	*	5512.200	37.63	41.82	79.45	54.00	25.45	AVG	No Limit