

# FCC Test Report

## FCC ID: QIST1-A22L

**Project No.** : 1509C205  
**Equipment** : HUAWEI MediaPad T1 10  
**Model Name** : T1-A22L  
**Applicant** : Huawei Technologies Co., Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen  
China

**Date of Receipt** : Sep. 15, 2015  
**Date of Test** : Sep. 15, 2015 ~ Sep. 28, 2015  
**Issued Date** : Sep. 29, 2015  
**Tested by** : BTL Inc.

**Testing Engineer** : Pike Lee  
(Pike Lee)

**Technical Manager** : Jeff Yang  
(Jeff Yang)

**Authorized Signatory** : Andy Chiu  
(Andy Chiu)

# **B T L I N C .**

B1, No. 37, Lane 365, Yang-Guang St.,  
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>1 . CERTIFICATION</b>	<b>5</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
<b>3 . GENERAL INFORMATION</b>	<b>8</b>
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	12
<b>4 . EMC EMISSION TEST</b>	<b>13</b>
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	15
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)	18
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	18
<b>5 . MEASUREMENT INSTRUMENTS LIST</b>	<b>19</b>
<b>6 . EUT TEST PHOTO</b>	<b>20</b>
<b>ATTACHMENT A - CONDUCTED EMISSION</b>	<b>26</b>
<b>ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>	<b>47</b>
<b>ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)</b>	<b>70</b>

## REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1509C205	Original Issue.	Sep. 29, 2015

## 1. CERTIFICATION

Equipment : HUAWEI MediaPad T1 10  
Brand Name : HUAWEI  
Model Name : T1-A22L  
Applicant : Huawei Technologies Co., Ltd.  
Manufacturer : Huawei Technologies Co., Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Factory : Huawei Technologies Co., Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Date of Test : Sep. 15, 2015 ~ Sep. 28, 2015  
Test Sample : Engineering Sample  
Standard(s) : FCC Part 15, Subpart B: 2014  
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1509C205) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B: 2014 ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	<b>NOTE (2)</b>

**NOTE:**

- (1) " N/A" denotes test is not applicable to this device.
- (2) If the EUT's max operating frequency does not exceed 108 MHz, the test will not be performed. The EUT's maximum operating frequency is 5.8GHz

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of B1, No. 37, Lane 365, Yang-Guang St., Nei-Hu District, Taipei City 114, Taiwan.

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%**.

### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
C02	CISPR	150 KHz~30MHz	2.59

### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
CB08	CISPR	30MHz~200MHz	V	3.22
		30MHz~200MHz	H	3.35
		200MHz~ 1,000MHz	V	3.24
		200MHz~ 1,000MHz	H	3.11
		1,000MHz~18,000MHz	V	4.05
		1,000MHz~18,000MHz	H	3.97
		18,000MHz~40,000MHz	V	4.04
		18,000MHz~40,000MHz	H	4.01

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MediaPad T1 10
Brand Name	HUAWEI
Model Name	T1-A22L
Model Difference	N/A
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO., LTD. (2) Shenzhen Huntkey Electric Co., Ltd. (3) DONGGUAN PHITEK ELECTRONICS CO.,LTD (4) DONGGUAN CITY YINYJU ELECTRONICS.,LTD Model: HW-050100U01 #2 Supplied from battery. Manufacturer: Huawei Technologies Co., Ltd. Battery Model: HB3080G1EBW
Power Rating	#1 I/P: ~100-240V 50/60Hz ,0.2A O/P: 5V $\equiv$ 1A #2 DC 3.8V 4800mAh
S/N	HUX0115820000040
HW Version	SH1T1A21LM
SW Version	T1-A22LV100R001C001

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- 2.

Item	Mfr/Brand	Model.
USB Cable	Shen Zhen Pang Ngai Industrial Co.,Ltd.	H09-000473
	HONGLIN TECHNOLOGY CO.,LTD	130-41040
Earphone	GoerTek Inc	HG-04
	MERRY ELECTRONICS CO., LTD	EMC323-011-01

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Mode 2	Adapter+earphone+camera on+idle+5G wifi+gps+bt
Mode 3	Adapter+earphone+playing+idle
Mode 4	Adapter+Speaker+playing+idle
Mode 5	Adapter+Speaker+Traffic
Mode 6	Adapter+earphone+Traffic
Mode 7	USB copy(EUT with PC)+earphone+idle


The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Mode 2	Adapter+earphone+camera on+idle+5G wifi+gps+bt
Mode 3	Adapter+earphone+playing+idle
Mode 4	Adapter+Speaker+playing+idle
Mode 5	Adapter+Speaker+Traffic
Mode 6	Adapter+earphone+Traffic
Mode 7	USB copy(EUT with PC)+earphone+idle


For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Mode 2	Adapter+earphone+camera on+idle+5G wifi+gps+bt
Mode 3	Adapter+earphone+playing+idle
Mode 4	Adapter+Speaker+playing+idle
Mode 5	Adapter+Speaker+Traffic
Mode 6	Adapter+earphone+Traffic
Mode 7	USB copy(EUT with PC)+earphone+idle

### 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

#### Mode 7

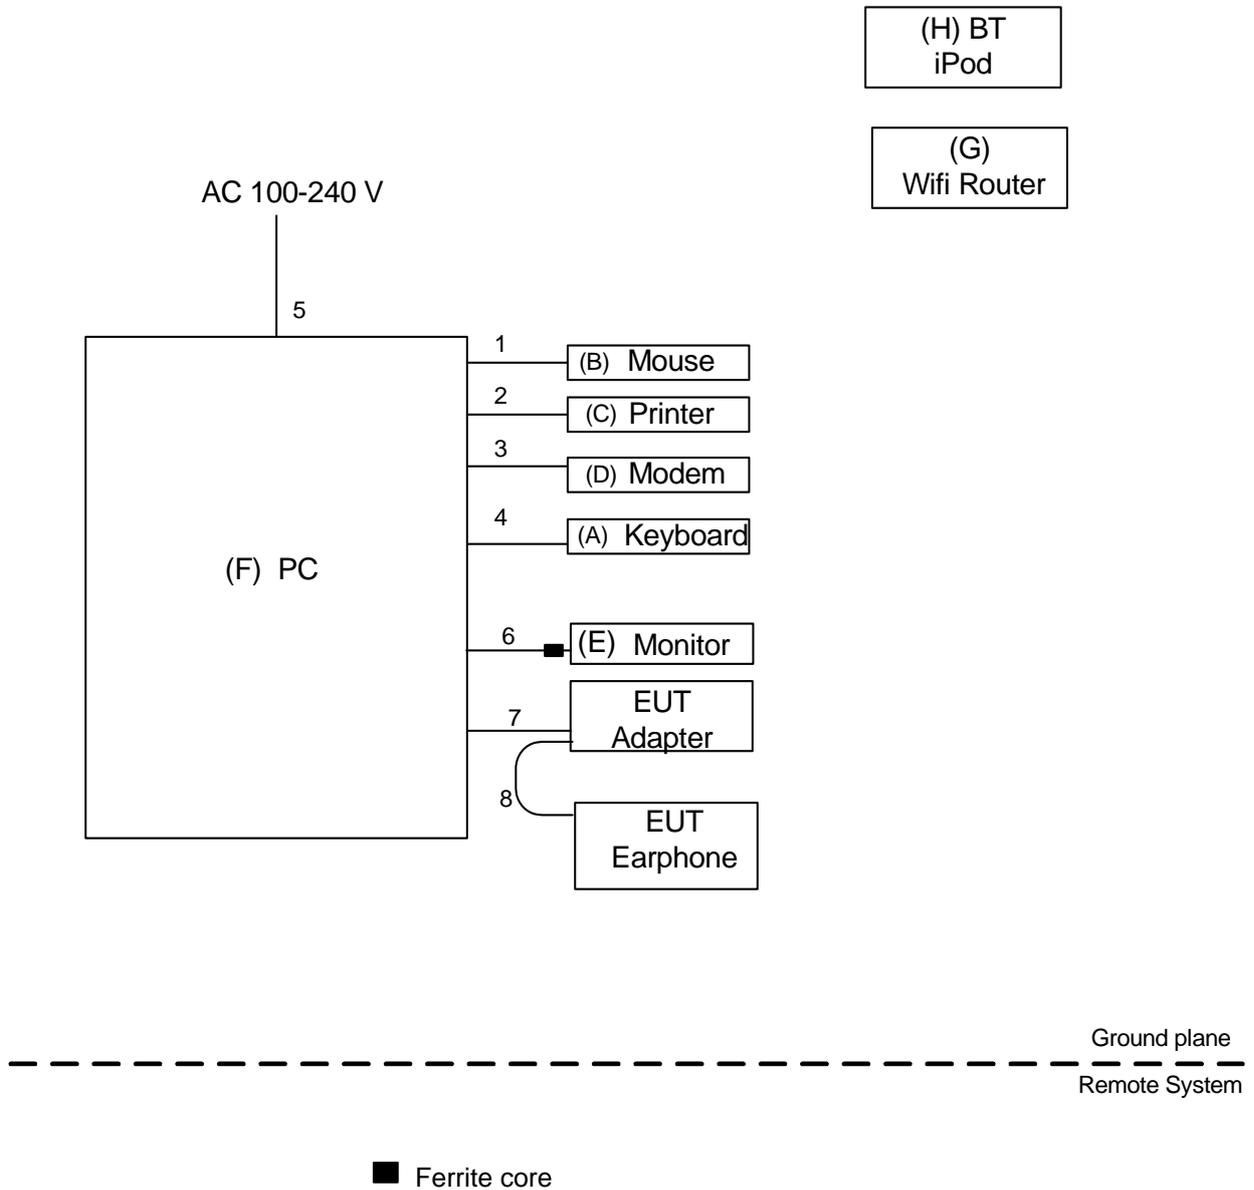

Mode 1-6

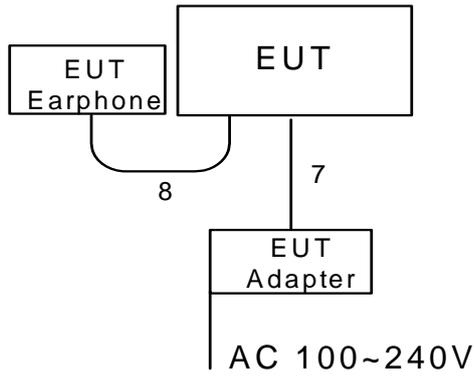

(H)  
BT iPod

(G)  
Wifi Router

(I) Wireless  
Communication  
Test SET

(J) Wideband Radio  
Communication  
Tester

(K) Signal  
Generator

-----  
Ground plane  
-----  
Remote System

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-6418
F	PC	Dell	DCSM 745	DOC	G7K832X
G	Wifi Router	TP-LINK	TL-WR1041N	DOC	N/A
H	iPod nano	Apple	A1446	BCG-A1446A	C7RJJR6NF0GV
I	Wireless Communication Test SET	Agilent	( 8960 Series ) E5515C	N/A	MY48364183
J	Wideband Radio Communication Tester	RS	CMW500	N/A	122125
K	Signal Generator	Agilent	E4438C	N/A	MY49071316

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1.0m	USB Cable
8	NO	NO	1.3m	Audio Cable

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value – Limit Value


#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

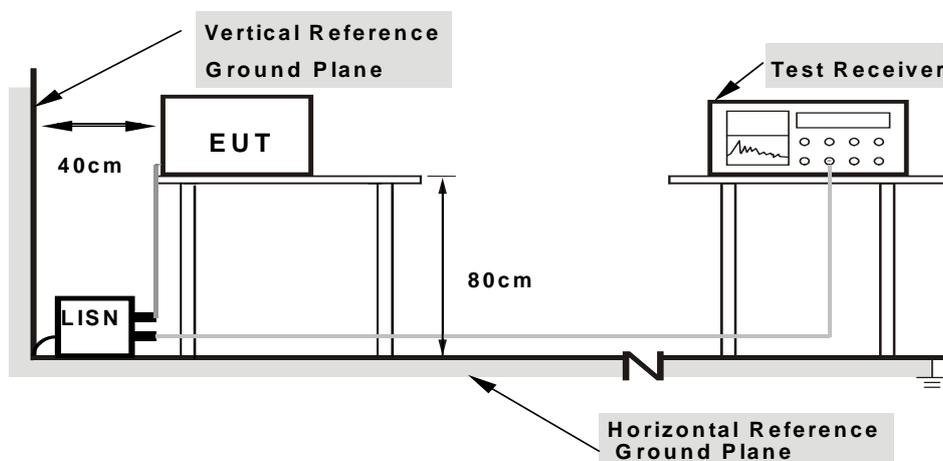

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

#### 4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 27°C Relative Humidity: 55%

#### Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " \* " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

**Below 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

**CISPR 22 or CAN/CSA-CISPR 22-10:**

Frequency (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	
30 - 230	40	30
230 - 1000	47	37

**Above 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

### FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

**NOTE:**

- (1) The limit for radiated test was performed according to as following:  
FCC Part 15, Subpart B: 2014
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).  
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

#### 4.2.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

**Note:**

For measurement of frequency 1GHz -30GHz, the EUT was set 3 meters away from the receiver antenna.

Emission level (dBuV/m)=20log Emission level (uV/m).

The limits above 6GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1m

Distance extrapolation factor =  $20 \log (3\text{m}/1\text{m})$  dB ;


Limit line = specific limits (dBuV) + 9.5 dB.

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP

##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

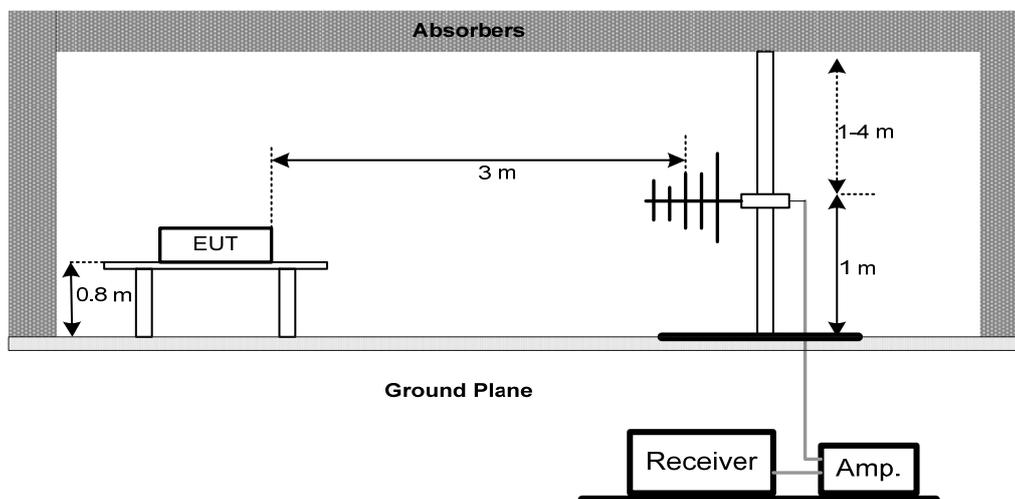

##### (B) Radiated Emission Test Set-Up Frequency Above 1 GHz

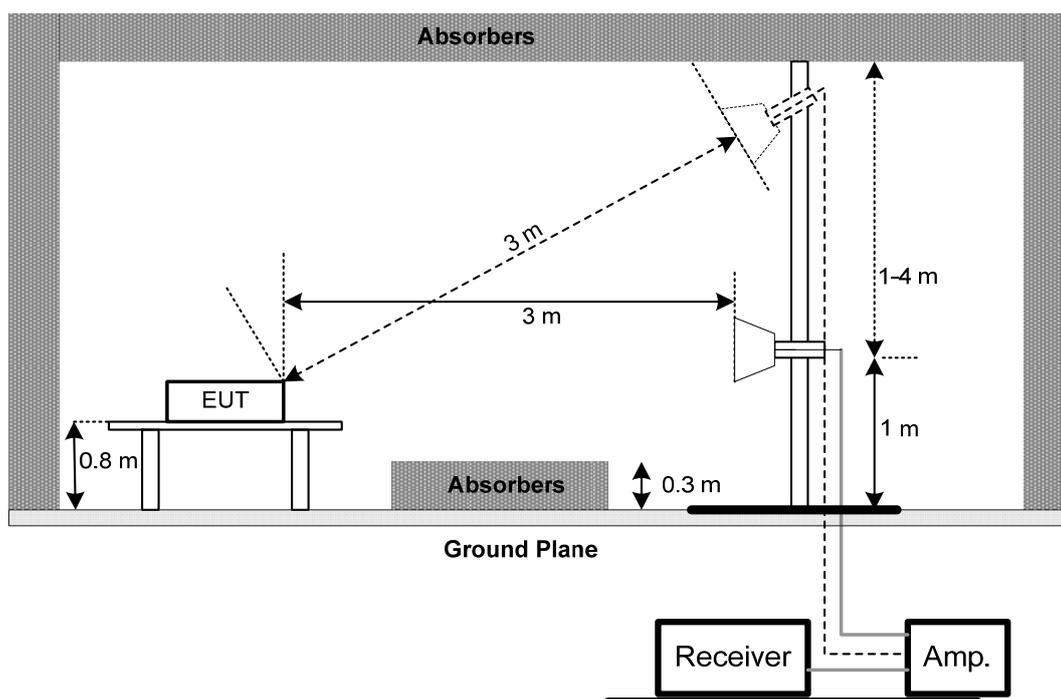

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 27°C Relative Humidity: 55%

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

#### 4.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C

Temperature: 27°C Relative Humidity: 55%

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) Data of measurement within this frequency range shown “ \* ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

## 5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100087	Nov. 22, 2015
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2016
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A


Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-352	Jul. 08, 2016
2	Pre-Amplifier	Anritsu	MH648A	M92649	Apr. 16, 2016
3	Test Cable	TIMES	LMR-400	12M	May 12, 2016
4	Test Cable	TIMES	LMR-400	3M	May 12, 2016
5	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
6	Horn Antenna (1G)	Schwarzbeck	BBHA 9120 D	9120D-325	Jan. 11, 2016
7	Pre_Amplifier	Agilent	8449B	3008A01714	Apr. 14, 2016
8	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May 11, 2016
9	Microflex Cable	AISI	S104-SMAP-1	10M	May 13, 2016
10	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	3M	May 11, 2016
11	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 13, 2015
12	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

## ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc


## Line

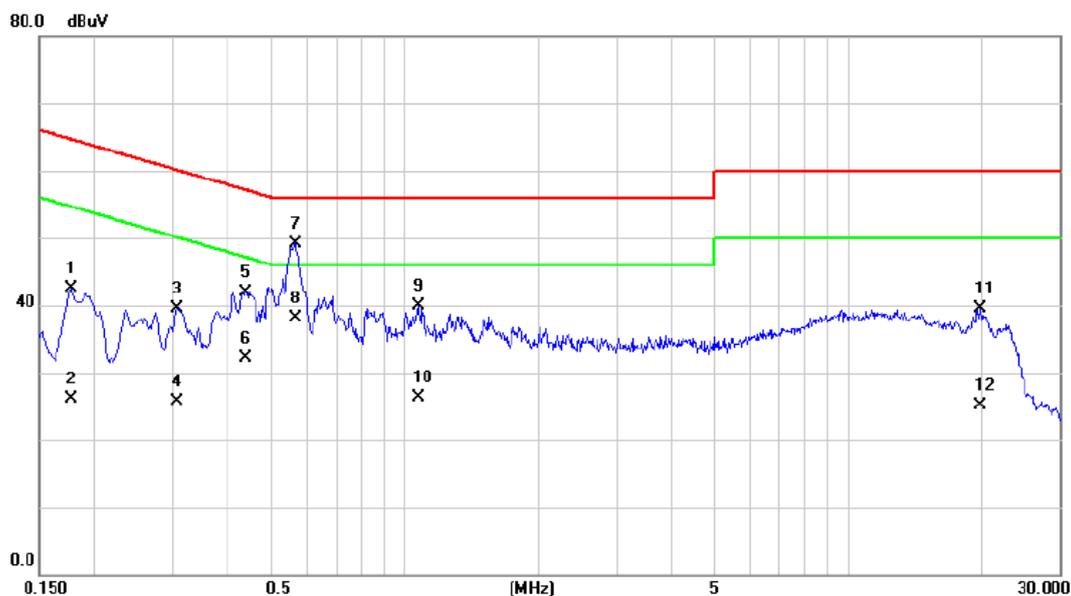

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1770	32.78	9.69	42.47	64.63	-22.16	QP	
2	0.1770	16.40	9.69	26.09	54.63	-28.54	AVG	
3	0.3075	29.83	9.76	39.59	60.04	-20.45	QP	
4	0.3075	15.96	9.76	25.72	50.04	-24.32	AVG	
5	0.4380	32.11	9.81	41.92	57.10	-15.18	QP	
6	0.4380	22.36	9.81	32.17	47.10	-14.93	AVG	
7 *	0.5662	39.36	9.84	49.20	56.00	-6.80	QP	
8	0.5662	28.32	9.84	38.16	46.00	-7.84	AVG	
9	1.0702	29.89	9.99	39.88	56.00	-16.12	QP	
10	1.0702	16.36	9.99	26.35	46.00	-19.65	AVG	
11	19.8668	29.13	10.38	39.51	60.00	-20.49	QP	
12	19.8668	14.69	10.38	25.07	50.00	-24.93	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc


### Neutral

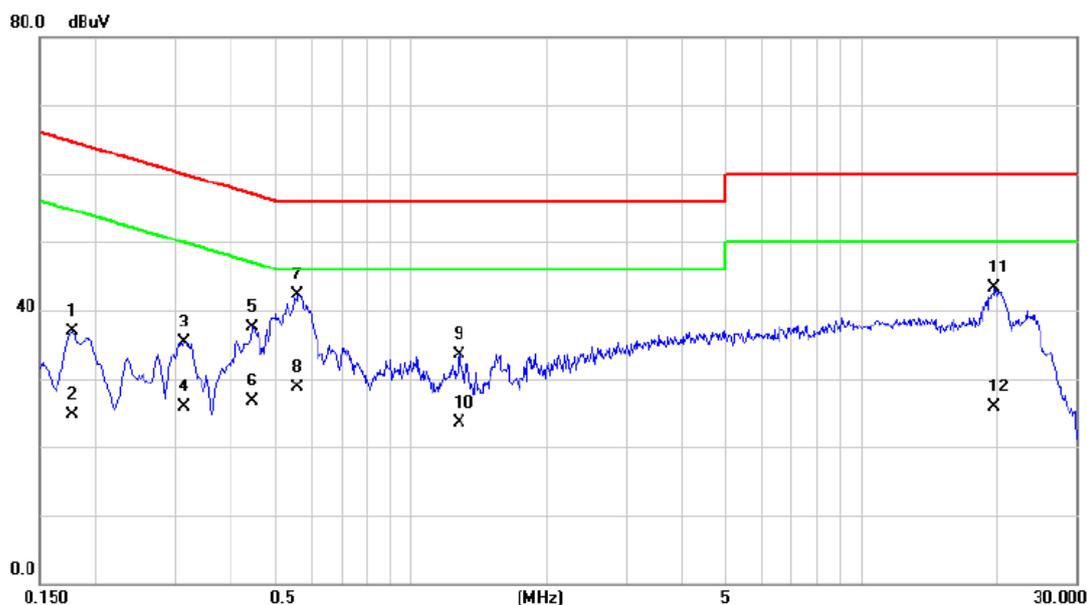

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1770	27.24	9.60	36.84	64.63	-27.79	QP	
2	0.1770	15.20	9.60	24.80	54.63	-29.83	AVG	
3	0.3141	25.76	9.63	35.39	59.86	-24.47	QP	
4	0.3141	16.32	9.63	25.95	49.86	-23.91	AVG	
5	0.4447	27.80	9.64	37.44	56.97	-19.53	QP	
6	0.4447	16.98	9.64	26.62	46.97	-20.35	AVG	
7 *	0.5617	32.72	9.67	42.39	56.00	-13.61	QP	
8	0.5617	18.96	9.67	28.63	46.00	-17.37	AVG	
9	1.2773	23.60	9.81	33.41	56.00	-22.59	QP	
10	1.2773	13.65	9.81	23.46	46.00	-22.54	AVG	
11	19.7744	32.98	10.28	43.26	60.00	-16.74	QP	
12	19.7744	15.62	10.28	25.90	50.00	-24.10	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: HK+USB Cable: Pang Ngai +Earphone: GoerTek Inc


### Line

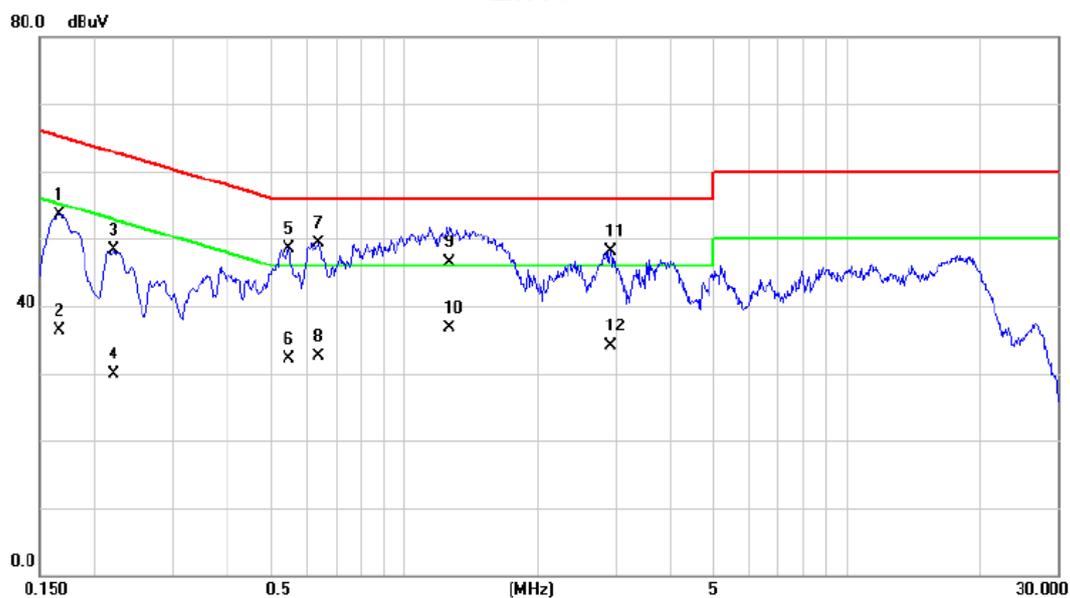

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1658	43.87	9.69	53.56	65.17	-11.61	QP	
2		0.1658	26.54	9.69	36.23	55.17	-18.94	AVG	
3		0.2198	38.51	9.72	48.23	62.83	-14.60	QP	
4		0.2198	20.10	9.72	29.82	52.83	-23.01	AVG	
5		0.5482	38.66	9.84	48.50	56.00	-7.50	QP	
6		0.5482	22.31	9.84	32.15	46.00	-13.85	AVG	
7	*	0.6427	39.52	9.87	49.39	56.00	-6.61	QP	
8		0.6427	22.70	9.87	32.57	46.00	-13.43	AVG	
9		1.2615	36.50	10.01	46.51	56.00	-9.49	QP	
10		1.2615	26.64	10.01	36.65	46.00	-9.35	AVG	
11		2.9175	38.21	9.84	48.05	56.00	-7.95	QP	
12		2.9175	24.30	9.84	34.14	46.00	-11.86	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: HK+USB Cable: Pang Ngai +Earphone: GoerTek Inc


## Neutral

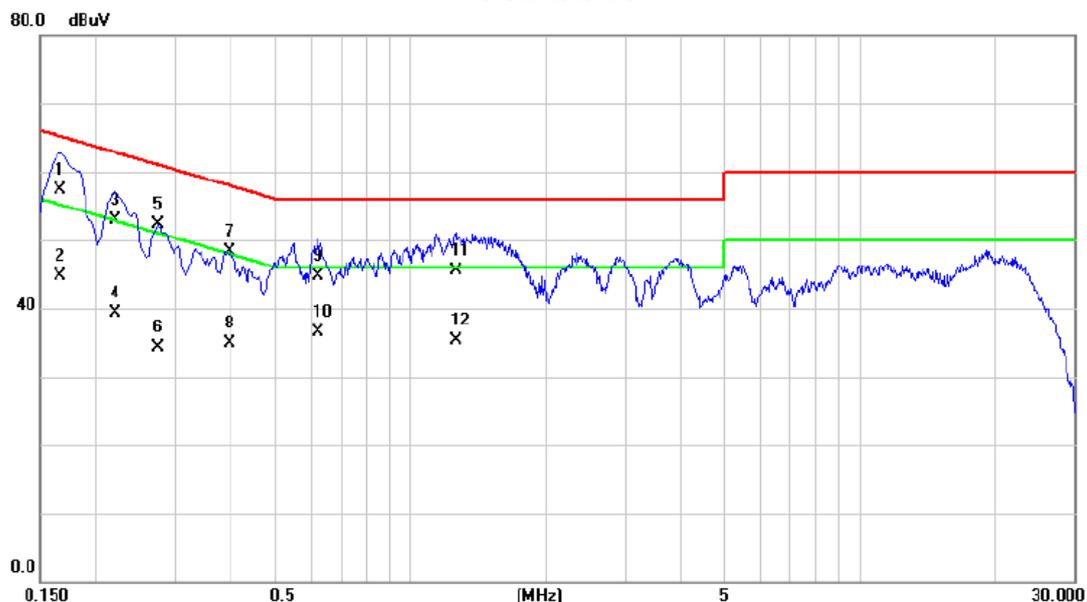

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1658	47.63	9.60	57.23	65.17	-7.94	QP	
2		0.1658	35.10	9.60	44.70	55.17	-10.47	AVG	
3		0.2198	43.20	9.61	52.81	62.83	-10.02	QP	
4		0.2198	29.60	9.61	39.21	52.83	-13.62	AVG	
5		0.2737	42.60	9.62	52.22	61.00	-8.78	QP	
6		0.2737	24.62	9.62	34.24	51.00	-16.76	AVG	
7		0.3975	38.74	9.63	48.37	57.91	-9.54	QP	
8		0.3975	25.32	9.63	34.95	47.91	-12.96	AVG	
9		0.6247	34.96	9.68	44.64	56.00	-11.36	QP	
10		0.6247	26.80	9.68	36.48	46.00	-9.52	AVG	
11		1.2593	35.60	9.81	45.41	56.00	-10.59	QP	
12		1.2593	25.40	9.81	35.21	46.00	-10.79	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Earphone: MERRY


## Line

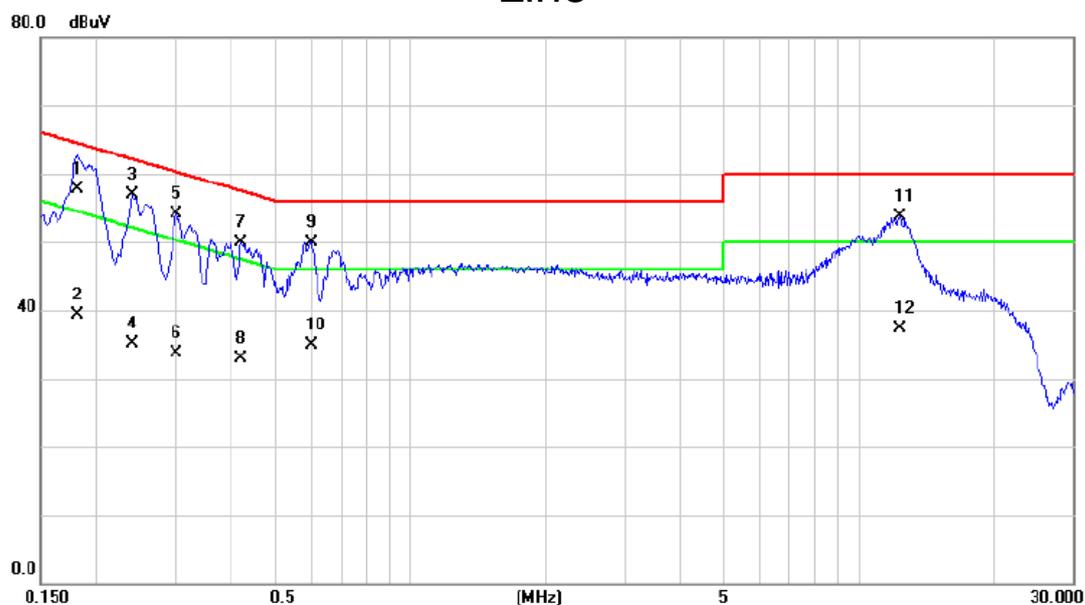

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1815	47.96	9.70	57.66	64.42	-6.76	QP	
2		0.1815	29.60	9.70	39.30	54.42	-15.12	AVG	
3	*	0.2400	47.15	9.73	56.88	62.10	-5.22	QP	
4		0.2400	25.32	9.73	35.05	52.10	-17.05	AVG	
5		0.3007	44.25	9.76	54.01	60.22	-6.21	QP	
6		0.3007	23.85	9.76	33.61	50.22	-16.61	AVG	
7		0.4200	40.17	9.81	49.98	57.45	-7.47	QP	
8		0.4200	23.10	9.81	32.91	47.45	-14.54	AVG	
9		0.6000	40.02	9.86	49.88	56.00	-6.12	QP	
10		0.6000	25.12	9.86	34.98	46.00	-11.02	AVG	
11		12.3202	43.46	10.16	53.62	60.00	-6.38	QP	
12		12.3202	27.12	10.16	37.28	50.00	-12.72	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Earphone: MERRY


### Neutral

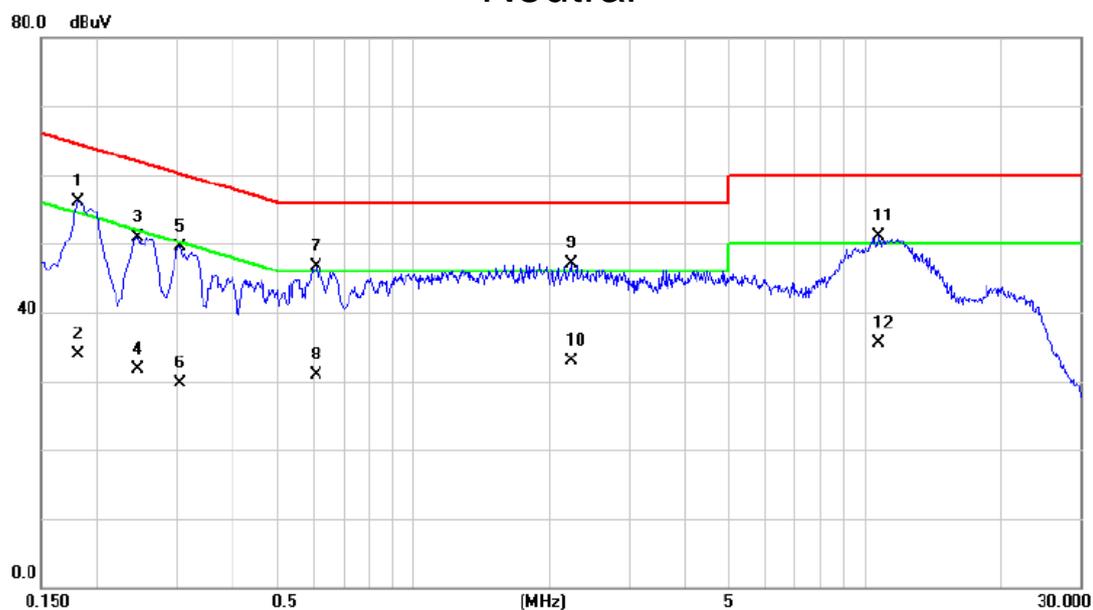

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1815	46.55	9.60	56.15	64.42	-8.27	QP	
2		0.1815	24.32	9.60	33.92	54.42	-20.50	AVG	
3		0.2445	41.29	9.62	50.91	61.94	-11.03	QP	
4		0.2445	22.14	9.62	31.76	51.94	-20.18	AVG	
5		0.3052	39.83	9.63	49.46	60.10	-10.64	QP	
6		0.3052	20.12	9.63	29.75	50.10	-20.35	AVG	
7		0.6112	37.09	9.68	46.77	56.00	-9.23	QP	
8		0.6112	21.30	9.68	30.98	46.00	-15.02	AVG	
9		2.2290	37.18	9.90	47.08	56.00	-8.92	QP	
10		2.2290	23.01	9.90	32.91	46.00	-13.09	AVG	
11		10.7655	41.05	10.08	51.13	60.00	-8.87	QP	
12		10.7655	25.41	10.08	35.49	50.00	-14.51	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: YINYJU +USB Cable: HONGLIN +Earphone: MERRY


## Line

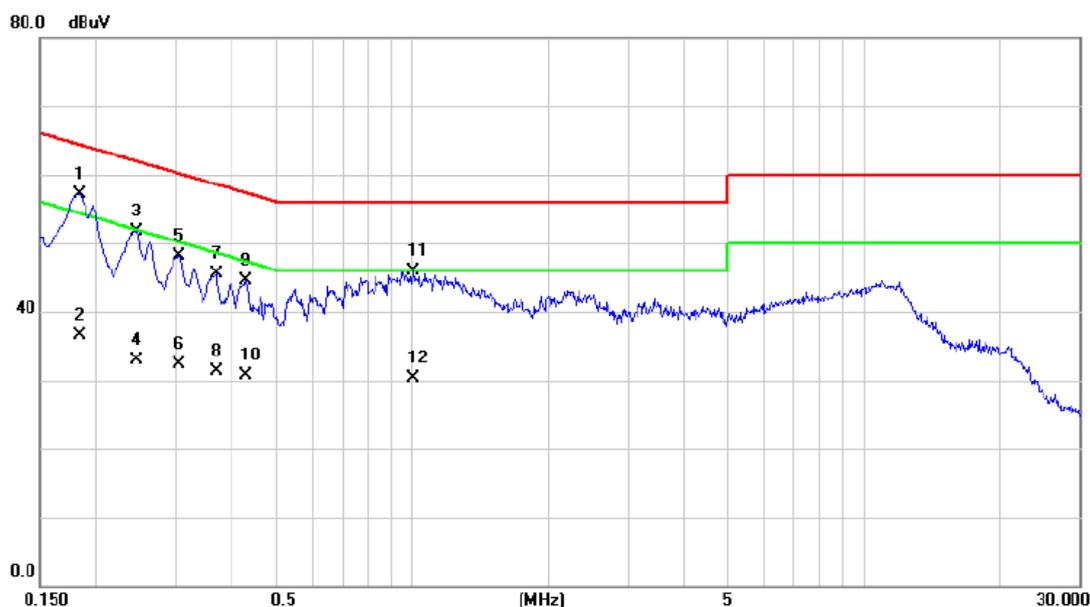

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1838	47.42	9.70	57.12	64.31	-7.19	QP	
2		0.1838	26.80	9.70	36.50	54.31	-17.81	AVG	
3		0.2445	42.07	9.73	51.80	61.94	-10.14	QP	
4		0.2445	23.10	9.73	32.83	51.94	-19.11	AVG	
5		0.3052	38.26	9.76	48.02	60.10	-12.08	QP	
6		0.3052	22.56	9.76	32.32	50.10	-17.78	AVG	
7		0.3682	35.61	9.80	45.41	58.54	-13.13	QP	
8		0.3682	21.43	9.80	31.23	48.54	-17.31	AVG	
9		0.4290	34.64	9.81	44.45	57.27	-12.82	QP	
10		0.4290	20.99	9.81	30.80	47.27	-16.47	AVG	
11		1.0072	35.83	9.98	45.81	56.00	-10.19	QP	
12		1.0072	20.36	9.98	30.34	46.00	-15.66	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: YINYJU +USB Cable: HONGLIN +Earphone: MERRY


## Neutral

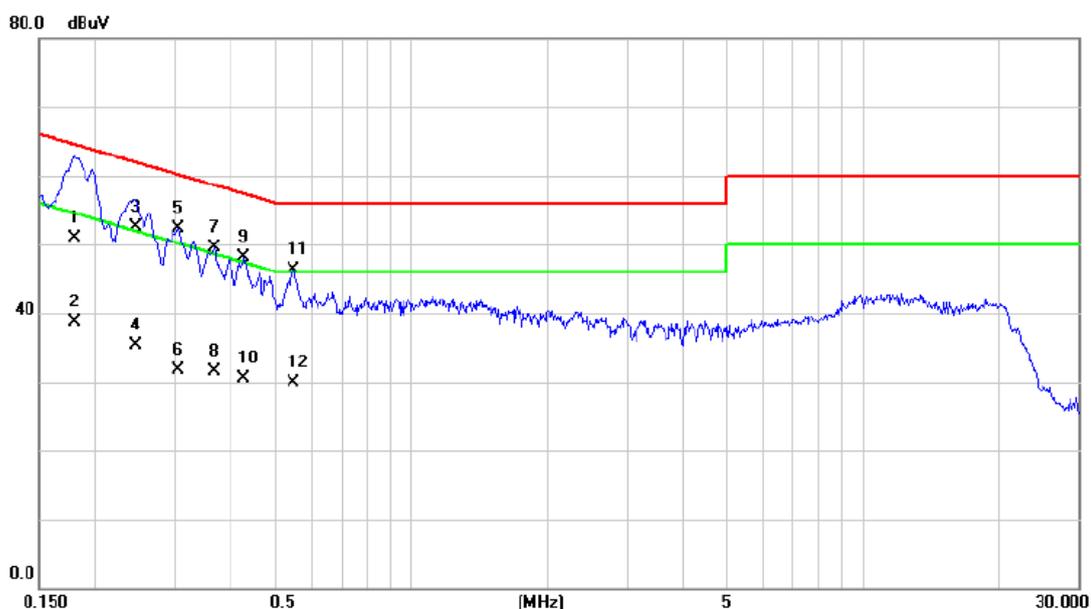

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1792	41.32	9.60	50.92	64.52	-13.60	QP	
2	0.1792	29.10	9.60	38.70	54.52	-15.82	AVG	
3	0.2445	42.89	9.62	52.51	61.94	-9.43	QP	
4	0.2445	25.60	9.62	35.22	51.94	-16.72	AVG	
5 *	0.3052	42.65	9.63	52.28	60.10	-7.82	QP	
6	0.3052	22.10	9.63	31.73	50.10	-18.37	AVG	
7	0.3660	39.85	9.64	49.49	58.59	-9.10	QP	
8	0.3660	21.96	9.64	31.60	48.59	-16.99	AVG	
9	0.4267	38.44	9.64	48.08	57.32	-9.24	QP	
10	0.4267	20.89	9.64	30.53	47.32	-16.79	AVG	
11	0.5482	36.58	9.66	46.24	56.00	-9.76	QP	
12	0.5482	20.21	9.66	29.87	46.00	-16.13	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+5G wifi+gps+bt
Note:	Adapter: HK +USB Cable: Pang Ngai +Earphone: GoerTek Inc


### Line

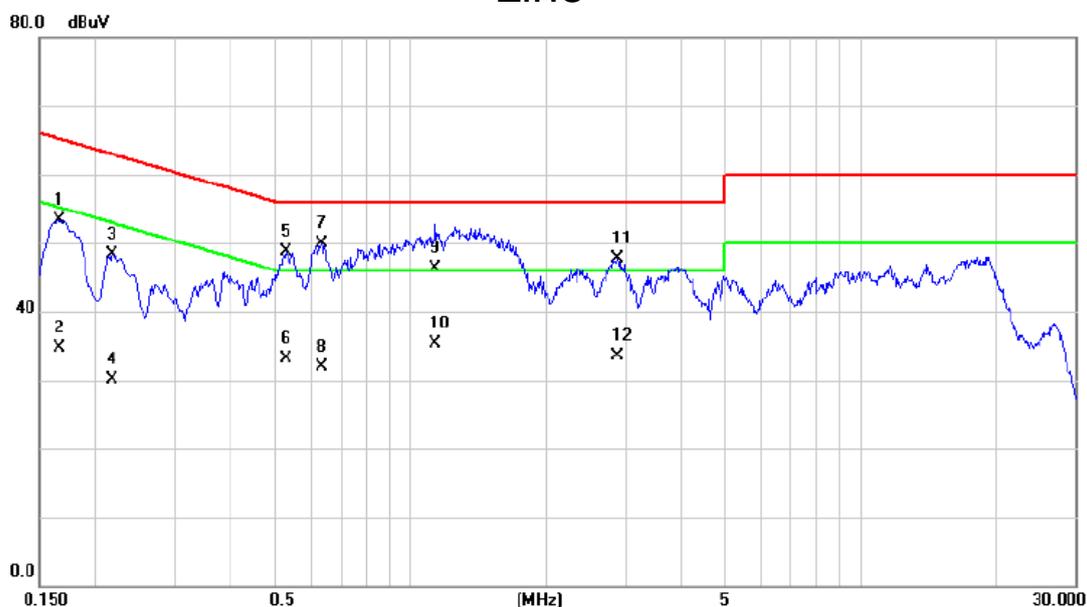

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1657	43.70	9.69	53.39	65.17	-11.78	QP	
2	X	0.1657	25.11	9.69	34.80	55.17	-20.37	AVG	
3		0.2175	38.51	9.72	48.23	62.91	-14.68	QP	
4	X	0.2175	20.32	9.72	30.04	52.91	-22.87	AVG	
5		0.5280	38.78	9.83	48.61	56.00	-7.39	QP	
6	X	0.5280	23.21	9.83	33.04	46.00	-12.96	AVG	
7	*	0.6360	39.99	9.87	49.86	56.00	-6.14	QP	
8	X	0.6360	22.10	9.87	31.97	46.00	-14.03	AVG	
9		1.1377	36.21	10.01	46.22	56.00	-9.78	QP	
10	X	1.1377	25.32	10.01	35.33	46.00	-10.67	AVG	
11		2.8882	37.83	9.85	47.68	56.00	-8.32	QP	
12	X	2.8882	23.60	9.85	33.45	46.00	-12.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+5G wifi+gps+bt
Note:	Adapter: HK +USB Cable: Pang Ngai +Earphone: GoerTek Inc


### Neutral

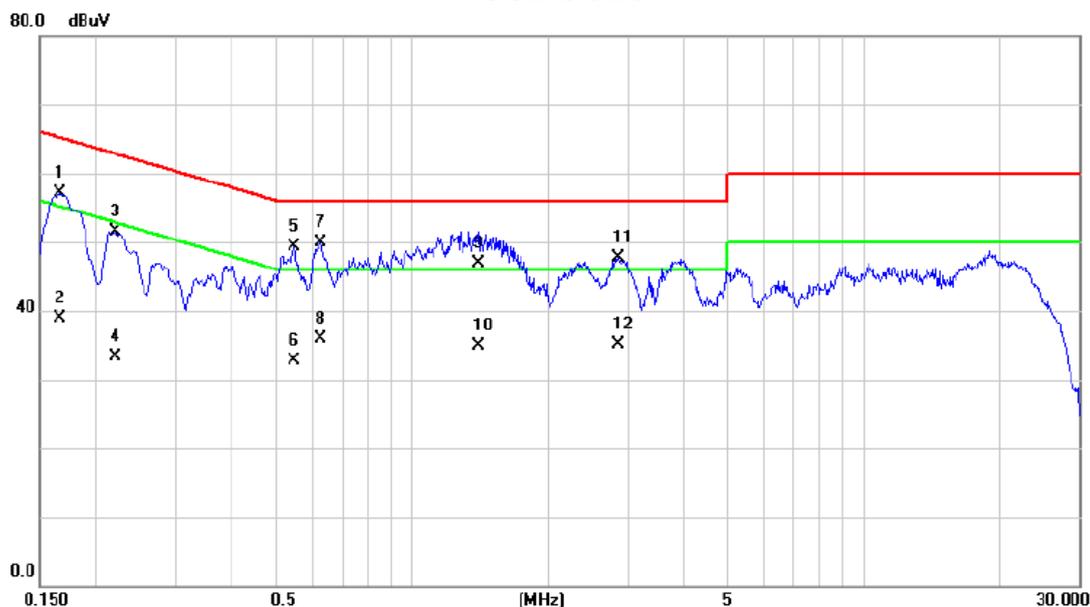

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1658	47.49	9.60	57.09	65.17	-8.08	QP	
2		0.1658	29.40	9.60	39.00	55.17	-16.17	AVG	
3		0.2198	41.90	9.61	51.51	62.83	-11.32	QP	
4		0.2198	23.65	9.61	33.26	52.83	-19.57	AVG	
5		0.5482	39.56	9.66	49.22	56.00	-6.78	QP	
6		0.5482	23.10	9.66	32.76	46.00	-13.24	AVG	
7	*	0.6292	40.25	9.68	49.93	56.00	-6.07	QP	
8		0.6292	26.30	9.68	35.98	46.00	-10.02	AVG	
9		1.3988	37.12	9.82	46.94	56.00	-9.06	QP	
10		1.3988	25.10	9.82	34.92	46.00	-11.08	AVG	
11		2.8658	37.92	9.82	47.74	56.00	-8.26	QP	
12		2.8658	25.32	9.82	35.14	46.00	-10.86	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: HK +USB Cable: Pang Ngai +Earphone: GoerTek Inc


## Line

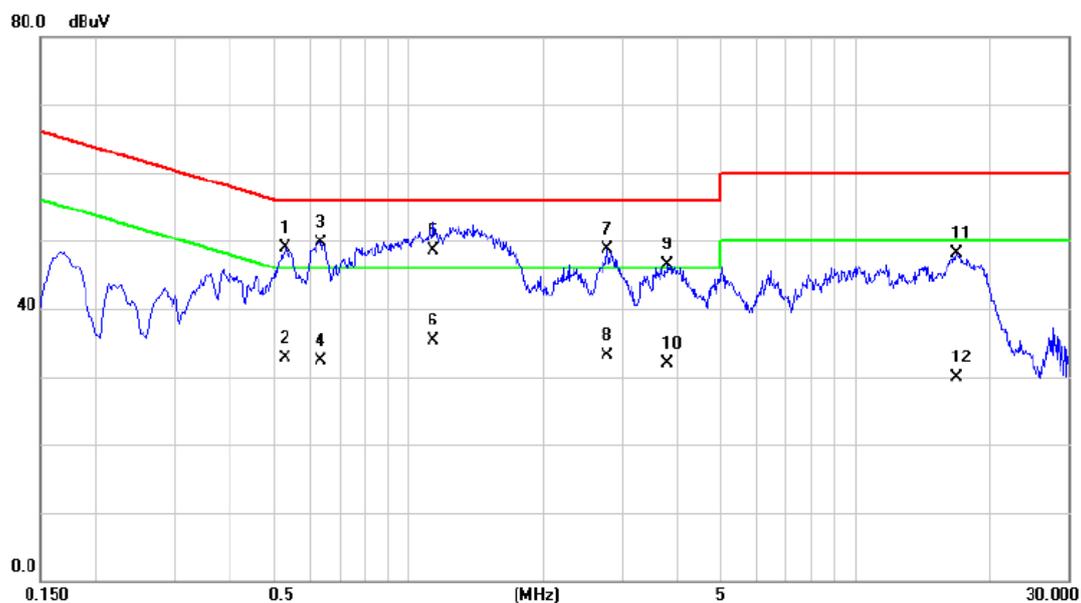

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5302	38.99	9.84	48.83	56.00	-7.17	QP	
2		0.5302	22.96	9.84	32.80	46.00	-13.20	AVG	
3	*	0.6360	39.89	9.87	49.76	56.00	-6.24	QP	
4		0.6360	22.50	9.87	32.37	46.00	-13.63	AVG	
5		1.1377	38.42	10.01	48.43	56.00	-7.57	QP	
6		1.1377	25.32	10.01	35.33	46.00	-10.67	AVG	
7		2.7915	38.78	9.87	48.65	56.00	-7.35	QP	
8		2.7915	23.30	9.87	33.17	46.00	-12.83	AVG	
9		3.8040	36.56	9.86	46.42	56.00	-9.58	QP	
10		3.8040	21.96	9.86	31.82	46.00	-14.18	AVG	
11		16.8473	37.69	10.32	48.01	60.00	-11.99	QP	
12		16.8473	19.54	10.32	29.86	50.00	-20.14	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: HK +USB Cable: Pang Ngai +Earphone: GoerTek Inc


### Neutral

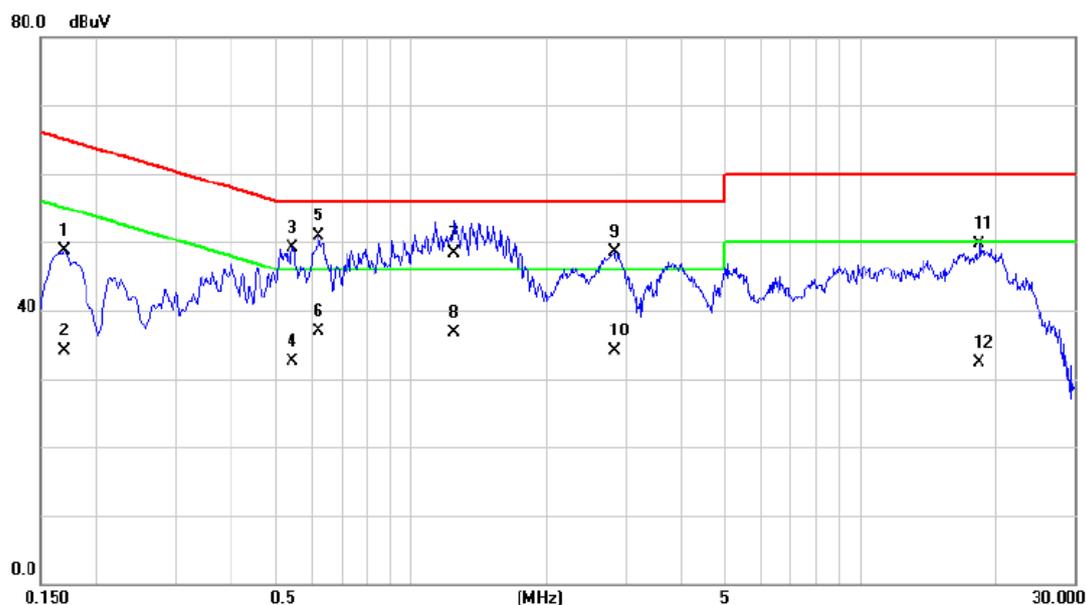

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1703	39.10	9.60	48.70	64.95	-16.25	QP	
2		0.1703	24.60	9.60	34.20	54.95	-20.75	AVG	
3		0.5460	39.37	9.66	49.03	56.00	-6.97	QP	
4		0.5460	22.90	9.66	32.56	46.00	-13.44	AVG	
5	*	0.6247	41.30	9.68	50.98	56.00	-5.02	QP	
6		0.6247	27.20	9.68	36.88	46.00	-9.12	AVG	
7		1.2480	38.52	9.80	48.32	56.00	-7.68	QP	
8		1.2480	26.90	9.80	36.70	46.00	-9.30	AVG	
9		2.8343	38.72	9.82	48.54	56.00	-7.46	QP	
10		2.8343	24.20	9.82	34.02	46.00	-11.98	AVG	
11		18.3862	39.39	10.27	49.66	60.00	-10.34	QP	
12		18.3862	21.96	10.27	32.23	50.00	-17.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: HK +USB Cable: Pang Ngai +Earphone: GoerTek Inc


## Line

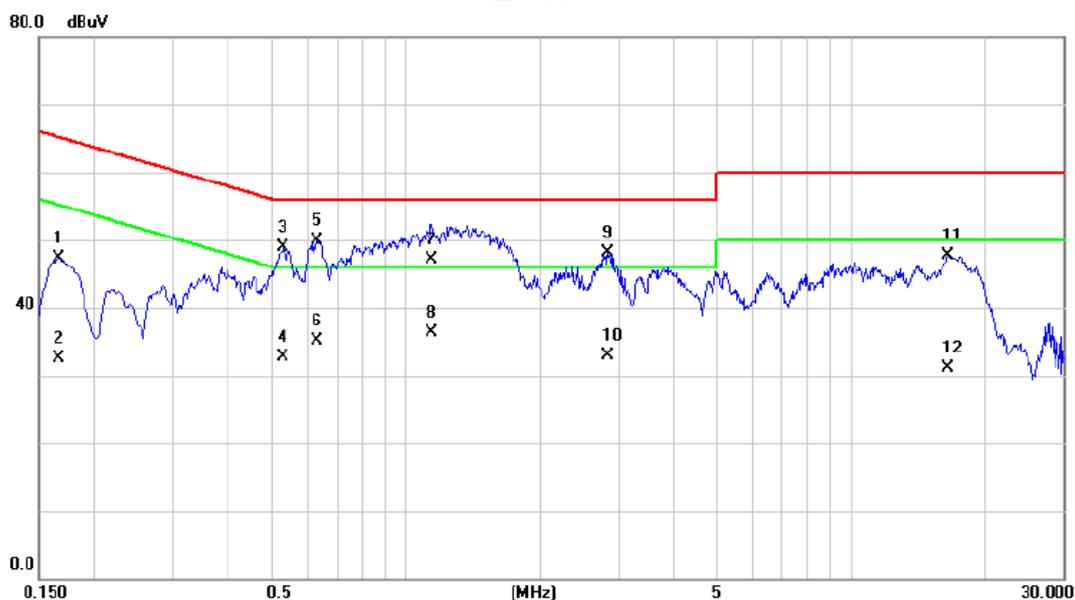

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1658	37.71	9.69	47.40	65.17	-17.77	QP	
2		0.1658	22.80	9.69	32.49	55.17	-22.68	AVG	
3		0.5302	38.97	9.84	48.81	56.00	-7.19	QP	
4		0.5302	22.90	9.84	32.74	46.00	-13.26	AVG	
5	*	0.6337	40.10	9.87	49.97	56.00	-6.03	QP	
6		0.6337	25.30	9.87	35.17	46.00	-10.83	AVG	
7		1.1445	37.12	10.01	47.13	56.00	-8.87	QP	
8		1.1445	26.20	10.01	36.21	46.00	-9.79	AVG	
9		2.8500	38.25	9.86	48.11	56.00	-7.89	QP	
10		2.8500	23.10	9.86	32.96	46.00	-13.04	AVG	
11		16.4985	37.31	10.31	47.62	60.00	-12.38	QP	
12		16.4985	20.80	10.31	31.11	50.00	-18.89	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: HK +USB Cable: Pang Ngai +Earphone: GoerTek Inc


## Neutral

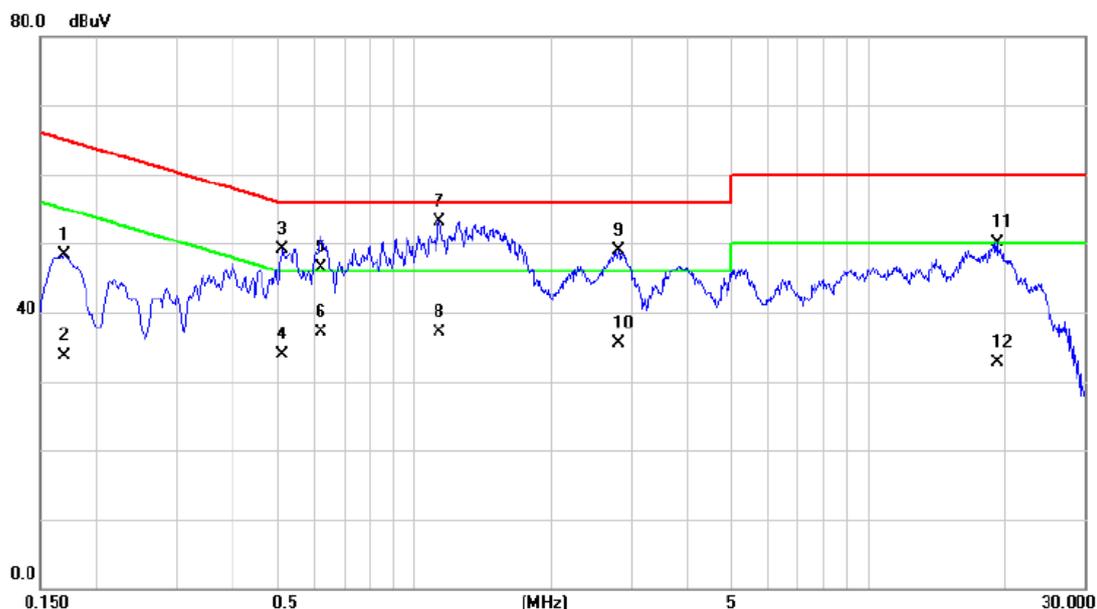

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1703	38.69	9.60	48.29	64.95	-16.66	QP	
2		0.1703	24.10	9.60	33.70	54.95	-21.25	AVG	
3		0.5122	39.42	9.65	49.07	56.00	-6.93	QP	
4		0.5122	24.30	9.65	33.95	46.00	-12.05	AVG	
5		0.6247	36.87	9.68	46.55	56.00	-9.45	QP	
6		0.6247	27.50	9.68	37.18	46.00	-8.82	AVG	
7	*	1.1377	43.36	9.80	53.16	56.00	-2.84	QP	
8		1.1377	27.30	9.80	37.10	46.00	-8.90	AVG	
9		2.8208	39.07	9.83	48.90	56.00	-7.10	QP	
10		2.8208	25.60	9.83	35.43	46.00	-10.57	AVG	
11		19.2930	39.82	10.27	50.09	60.00	-9.91	QP	
12		19.2930	22.50	10.27	32.77	50.00	-17.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: HK +USB Cable: Pang Ngai +Earphone: GoerTek Inc


## Line

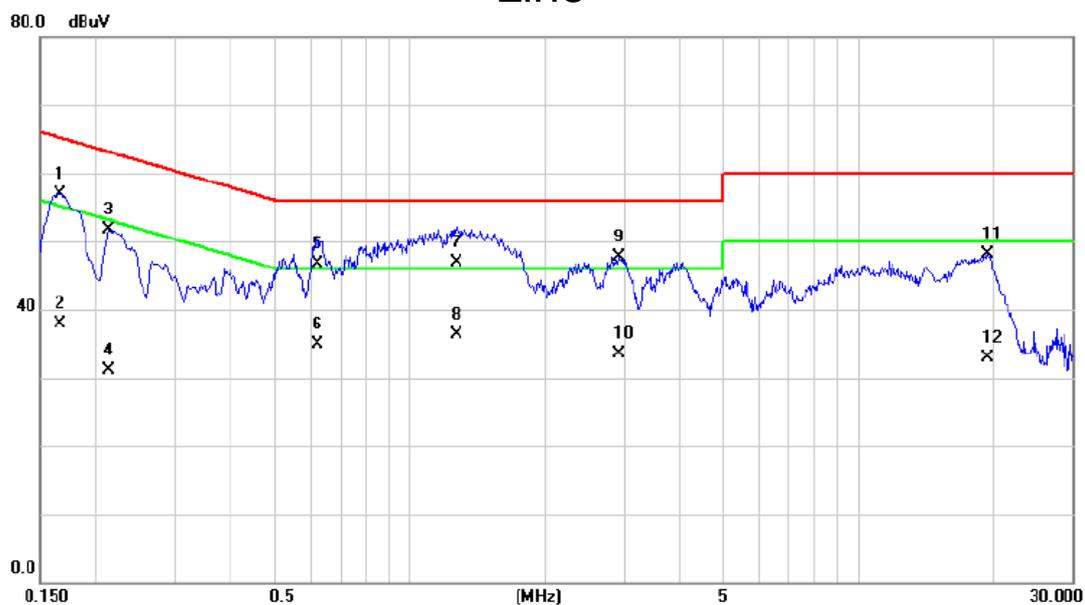

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1657	47.17	9.69	56.86	65.17	-8.31	QP	
2		0.1657	28.30	9.69	37.99	55.17	-17.18	AVG	
3		0.2130	41.96	9.72	51.68	63.09	-11.41	QP	
4		0.2130	21.30	9.72	31.02	53.09	-22.07	AVG	
5		0.6247	36.84	9.87	46.71	56.00	-9.29	QP	
6		0.6247	25.10	9.87	34.97	46.00	-11.03	AVG	
7		1.2682	36.92	10.00	46.92	56.00	-9.08	QP	
8		1.2682	26.30	10.00	36.30	46.00	-9.70	AVG	
9		2.9332	37.85	9.83	47.68	56.00	-8.32	QP	
10		2.9332	23.60	9.83	33.43	46.00	-12.57	AVG	
11		19.4505	37.74	10.37	48.11	60.00	-11.89	QP	
12		19.4505	22.50	10.37	32.87	50.00	-17.13	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: HK +USB Cable: Pang Ngai +Earphone: GoerTek Inc


## Neutral

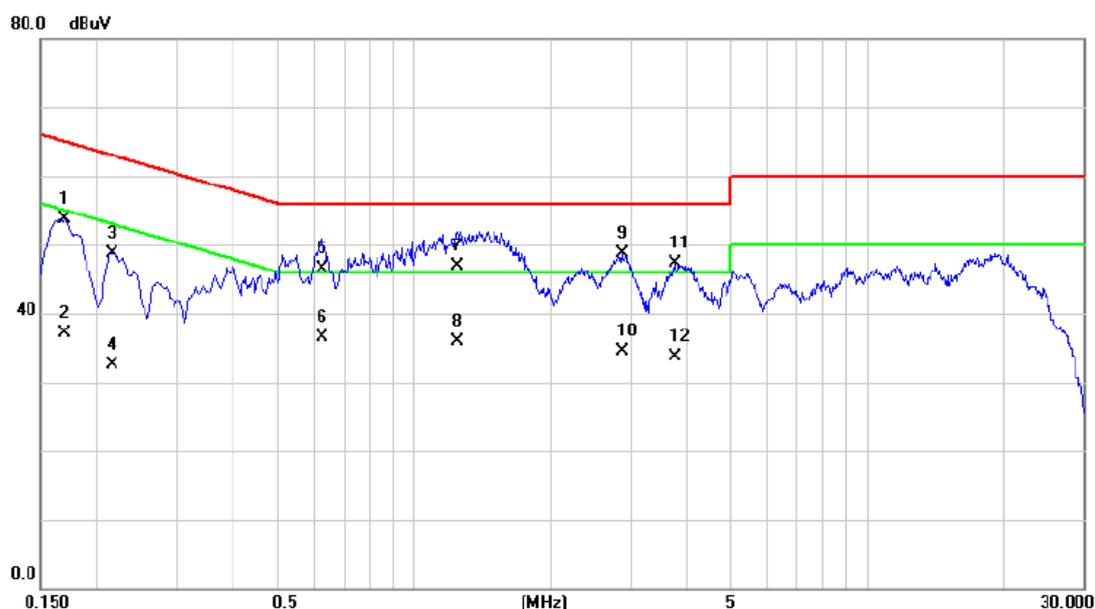

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1702	44.11	9.60	53.71	64.95	-11.24	QP	
2	X	0.1702	27.60	9.60	37.20	54.95	-17.75	AVG	
3		0.2152	39.12	9.61	48.73	63.00	-14.27	QP	
4	X	0.2152	22.96	9.61	32.57	53.00	-20.43	AVG	
5		0.6270	36.90	9.68	46.58	56.00	-9.42	QP	
6	X	0.6270	26.90	9.68	36.58	46.00	-9.42	AVG	
7		1.2435	37.20	9.80	47.00	56.00	-9.00	QP	
8	X	1.2435	26.10	9.80	35.90	46.00	-10.10	AVG	
9	*	2.8815	38.82	9.81	48.63	56.00	-7.37	QP	
10	X	2.8815	24.60	9.81	34.41	46.00	-11.59	AVG	
11		3.7702	37.37	9.93	47.30	56.00	-8.70	QP	
12	X	3.7702	23.69	9.93	33.62	46.00	-12.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: HK +USB Cable: Pang Ngai +Earphone: GoerTek Inc


### Line

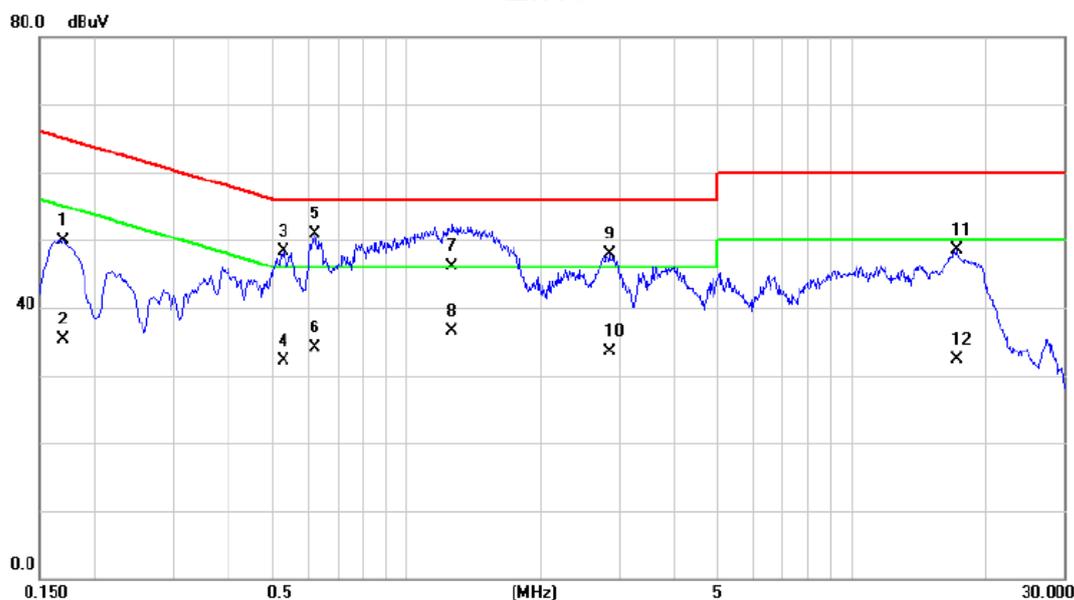

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1703	40.24	9.69	49.93	64.95	-15.02	QP	
2	0.1703	25.60	9.69	35.29	54.95	-19.66	AVG	
3	0.5280	38.39	9.83	48.22	56.00	-7.78	QP	
4	0.5280	22.30	9.83	32.13	46.00	-13.87	AVG	
5 *	0.6247	40.94	9.87	50.81	56.00	-5.19	QP	
6	0.6247	24.20	9.87	34.07	46.00	-11.93	AVG	
7	1.2660	36.00	10.01	46.01	56.00	-9.99	QP	
8	1.2660	26.40	10.01	36.41	46.00	-9.59	AVG	
9	2.8545	37.97	9.86	47.83	56.00	-8.17	QP	
10	2.8545	23.60	9.86	33.46	46.00	-12.54	AVG	
11	17.1848	38.08	10.33	48.41	60.00	-11.59	QP	
12	17.1848	21.93	10.33	32.26	50.00	-17.74	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: HK +USB Cable: Pang Ngai +Earphone: GoerTek Inc


## Neutral

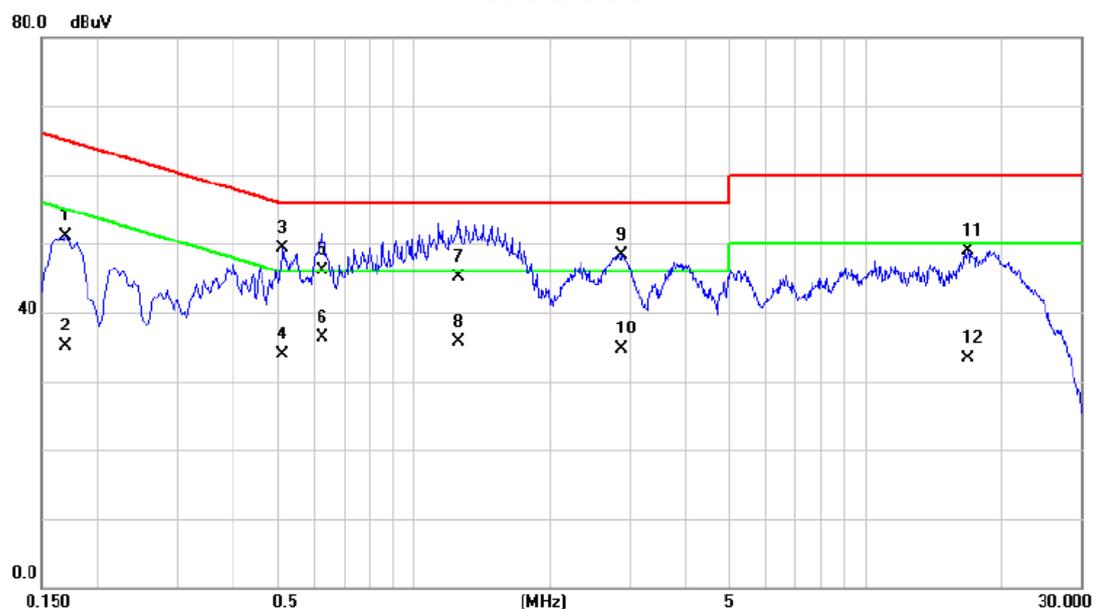

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1702	41.52	9.60	51.12	64.95	-13.83	QP	
2		0.1702	25.60	9.60	35.20	54.95	-19.75	AVG	
3	*	0.5122	39.61	9.65	49.26	56.00	-6.74	QP	
4		0.5122	24.30	9.65	33.95	46.00	-12.05	AVG	
5		0.6270	36.40	9.68	46.08	56.00	-9.92	QP	
6		0.6270	26.70	9.68	36.38	46.00	-9.62	AVG	
7		1.2525	35.20	9.81	45.01	56.00	-10.99	QP	
8		1.2525	25.80	9.81	35.61	46.00	-10.39	AVG	
9		2.8927	38.57	9.81	48.38	56.00	-7.62	QP	
10		2.8927	24.96	9.81	34.77	46.00	-11.23	AVG	
11		16.8607	38.63	10.27	48.90	60.00	-11.10	QP	
12		16.8607	23.10	10.27	33.37	50.00	-16.63	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle
Note:	USB Cable: Pang Ngai +Earphone: GoerTek Inc


## Line

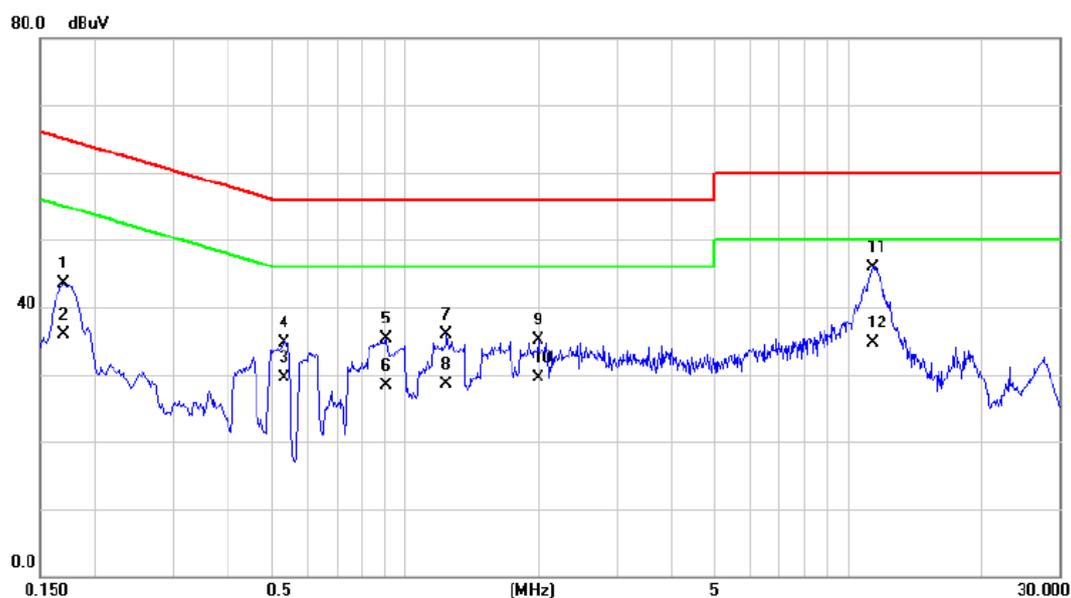

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1703	33.80	9.69	43.49	64.95	-21.46	QP	
2		0.1703	26.30	9.69	35.99	54.95	-18.96	AVG	
3		0.5347	19.60	9.84	29.44	56.00	-26.56	QP	
4	*	0.5347	24.90	9.84	34.74	46.00	-11.26	AVG	
5		0.9082	25.31	9.95	35.26	56.00	-20.74	QP	
6		0.9082	18.40	9.95	28.35	46.00	-17.65	AVG	
7		1.2390	25.81	10.01	35.82	56.00	-20.18	QP	
8		1.2390	18.50	10.01	28.51	46.00	-17.49	AVG	
9		1.9973	25.22	9.86	35.08	56.00	-20.92	QP	
10		1.9973	19.60	9.86	29.46	46.00	-16.54	AVG	
11		11.3438	35.84	10.11	45.95	60.00	-14.05	QP	
12		11.3438	24.60	10.11	34.71	50.00	-15.29	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle
Note:	USB Cable: Pang Ngai +Earphone: GoerTek Inc

### Neutral

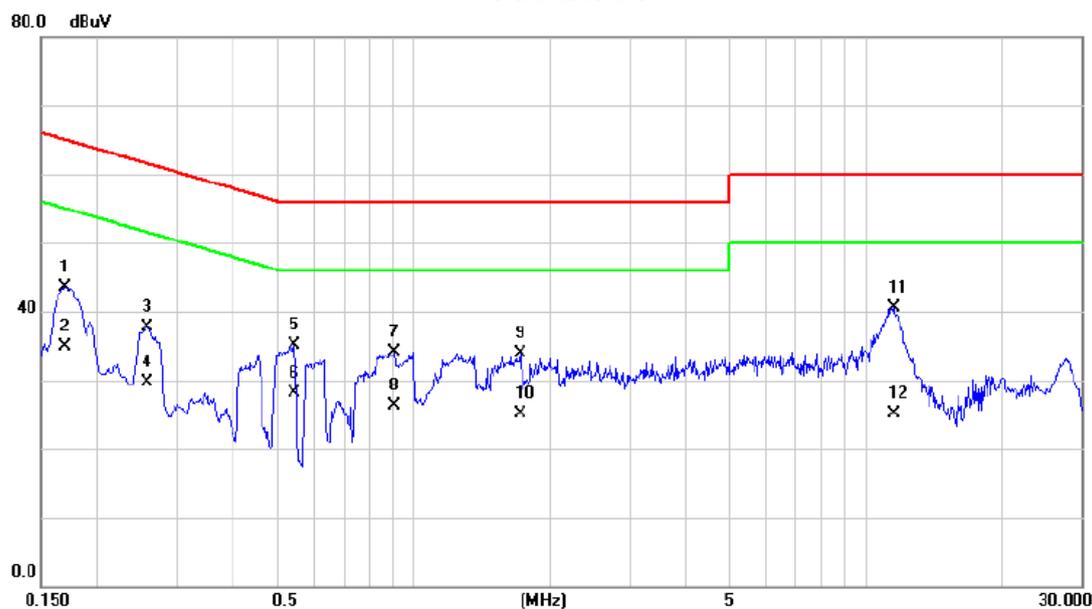


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1703	33.98	9.60	43.58	64.95	-21.37	QP	
2	0.1703	25.32	9.60	34.92	54.95	-20.03	AVG	
3	0.2580	28.14	9.62	37.76	61.50	-23.74	QP	
4	0.2580	20.10	9.62	29.72	51.50	-21.78	AVG	
5	0.5437	25.39	9.66	35.05	56.00	-20.95	QP	
6 *	0.5437	18.50	9.66	28.16	46.00	-17.84	AVG	
7	0.9082	24.34	9.75	34.09	56.00	-21.91	QP	
8	0.9082	16.50	9.75	26.25	46.00	-19.75	AVG	
9	1.7250	24.12	9.87	33.99	56.00	-22.01	QP	
10	1.7250	15.20	9.87	25.07	46.00	-20.93	AVG	
11	11.4833	30.48	10.11	40.59	60.00	-19.41	QP	
12	11.4833	14.90	10.11	25.01	50.00	-24.99	AVG	

**ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)**

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc H


### Vertical

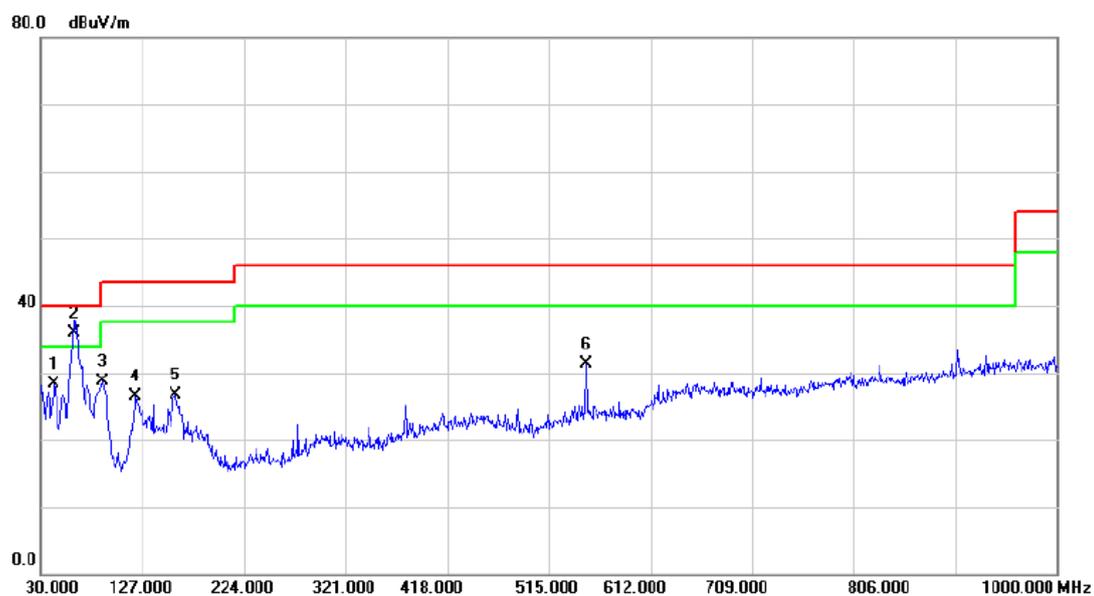

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		42.6100	42.19	-13.92	28.27	40.00	-11.73	QP	
2	*	62.0100	50.90	-15.04	35.86	40.00	-4.14	QP	
3		88.2000	48.70	-19.92	28.78	43.50	-14.72	QP	
4		120.2100	42.79	-16.20	26.59	43.50	-16.91	QP	
5		159.0100	40.58	-13.93	26.65	43.50	-16.85	QP	
6		550.8900	39.34	-7.97	31.37	46.00	-14.63	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Horizontal

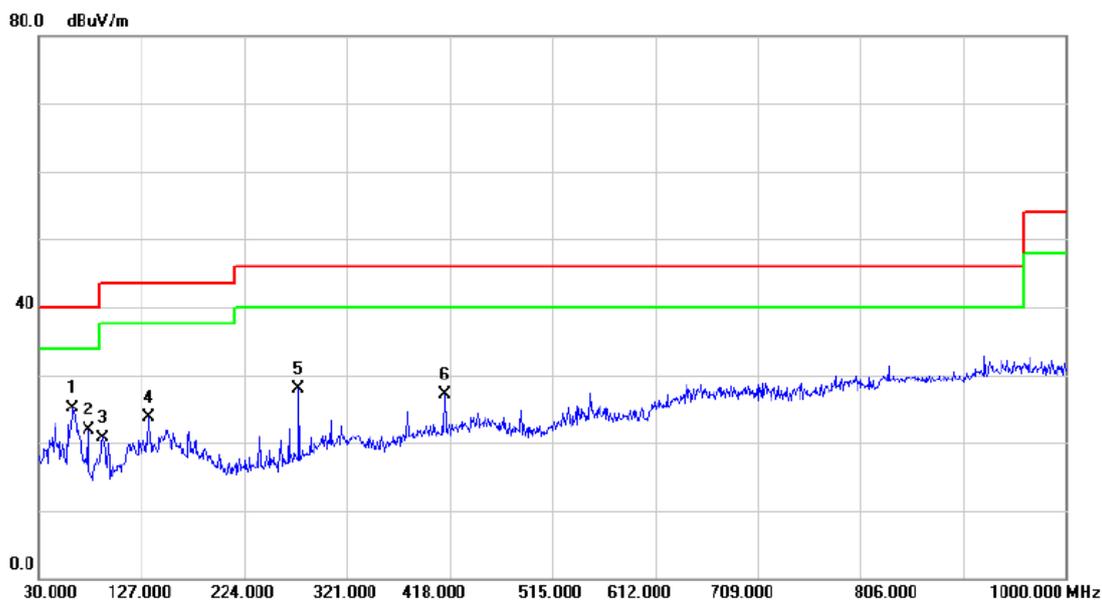

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	62.0100	40.18	-15.04	25.14	40.00	-14.86	QP	
2		76.5600	39.40	-17.48	21.92	40.00	-18.08	QP	
3		90.1400	41.10	-20.30	20.80	43.50	-22.70	QP	
4		133.7900	38.65	-14.97	23.68	43.50	-19.82	QP	
5		275.4100	42.03	-14.07	27.96	46.00	-18.04	QP	
6		413.1500	37.82	-10.71	27.11	46.00	-18.89	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc V


## Vertical

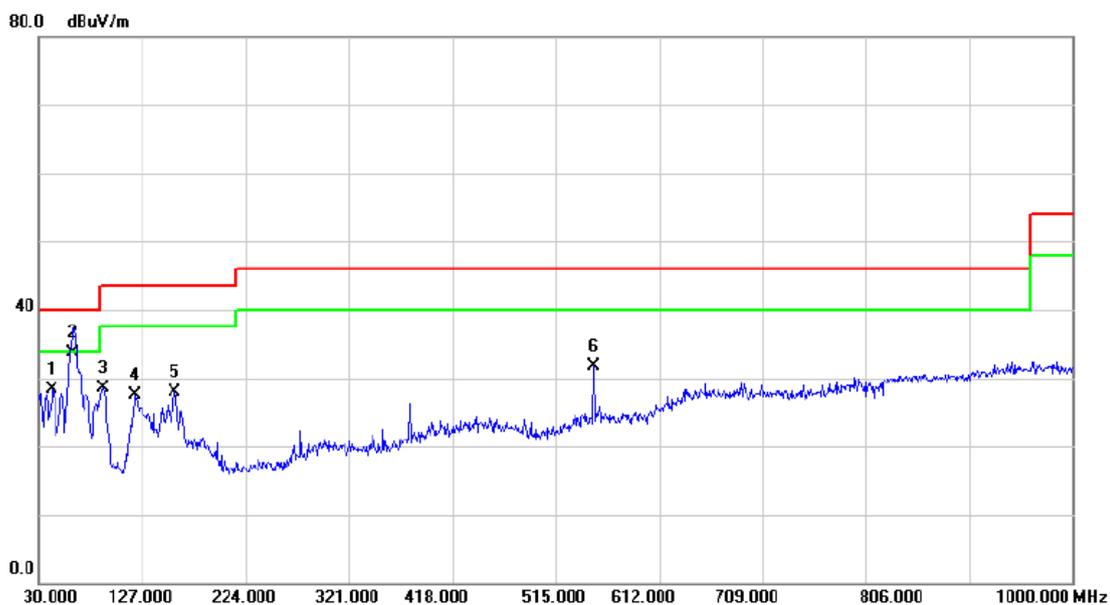

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		42.6100	42.27	-13.92	28.35	40.00	-11.65	QP	
2	*	62.0100	48.80	-15.04	33.76	40.00	-6.24	QP	
3		90.1400	48.77	-20.30	28.47	43.50	-15.03	QP	
4		120.2100	43.62	-16.20	27.42	43.50	-16.08	QP	
5		157.0700	41.95	-13.96	27.99	43.50	-15.51	QP	
6		550.8900	39.58	-7.97	31.61	46.00	-14.39	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc V


## Horizontal

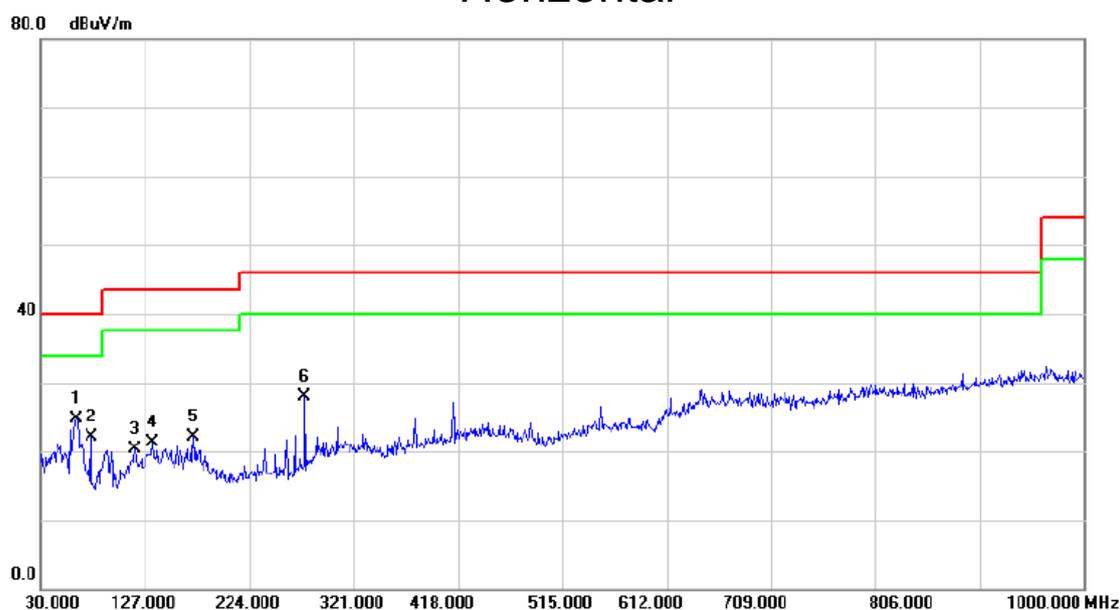

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	62.9800	39.88	-15.20	24.68	40.00	-15.32	QP	
2		76.5600	39.60	-17.48	22.12	40.00	-17.88	QP	
3		117.3000	36.76	-16.52	20.24	43.50	-23.26	QP	
4		133.7900	36.33	-14.97	21.36	43.50	-22.14	QP	
5		171.6200	36.77	-14.57	22.20	43.50	-21.30	QP	
6		275.4100	42.05	-14.07	27.98	46.00	-18.02	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: HK+USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Vertical

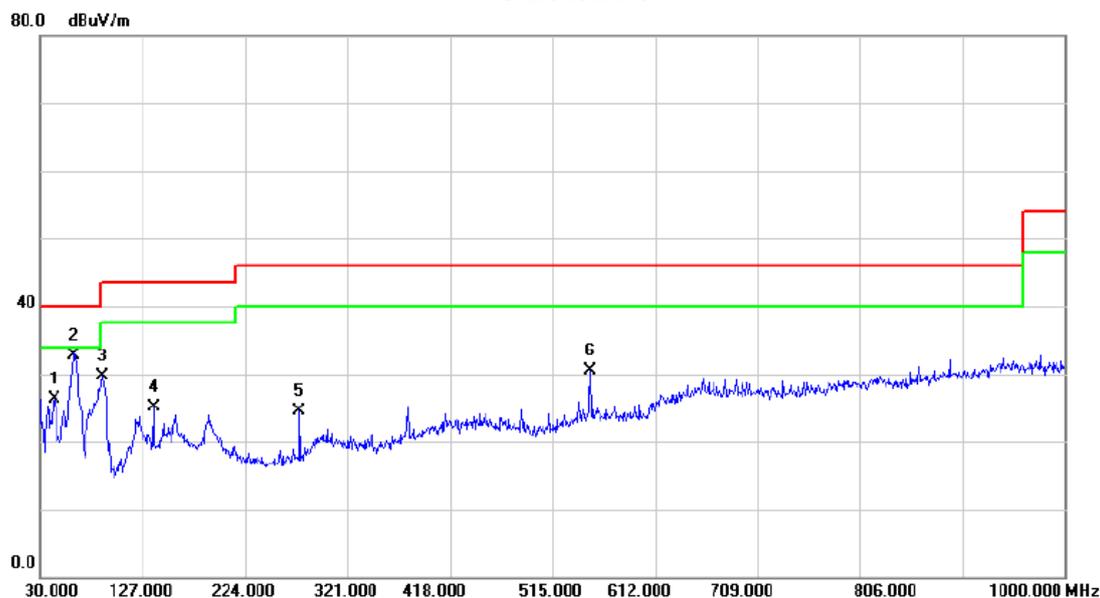

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		43.5800	40.16	-13.82	26.34	40.00	-13.66	QP	
2	*	62.0100	47.80	-15.04	32.76	40.00	-7.24	QP	
3		88.2000	49.61	-19.92	29.69	43.50	-13.81	QP	
4		137.6700	39.74	-14.63	25.11	43.50	-18.39	QP	
5		275.4100	38.64	-14.07	24.57	46.00	-21.43	QP	
6		550.8900	38.44	-7.97	30.47	46.00	-15.53	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: HK+USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Horizontal

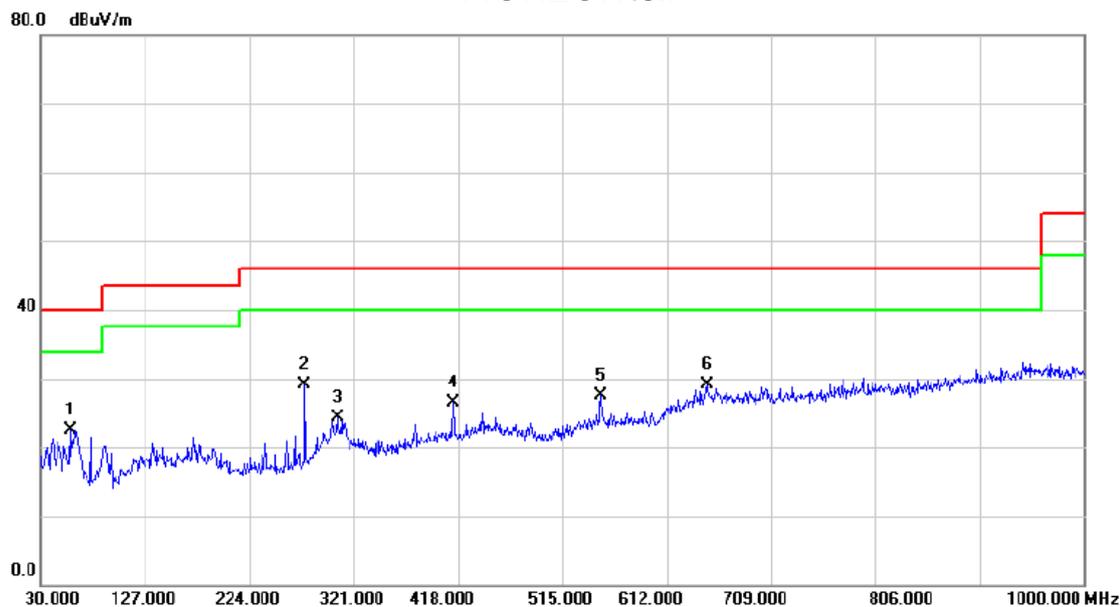

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		57.1600	36.91	-14.44	22.47	40.00	-17.53	QP	
2		275.4100	43.12	-14.07	29.05	46.00	-16.95	QP	
3		305.4800	37.62	-13.34	24.28	46.00	-21.72	QP	
4		413.1500	37.25	-10.71	26.54	46.00	-19.46	QP	
5		550.8900	35.44	-7.97	27.47	46.00	-18.53	QP	
6	*	649.8300	36.03	-6.91	29.12	46.00	-16.88	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Earphone: MERRY H


## Vertical

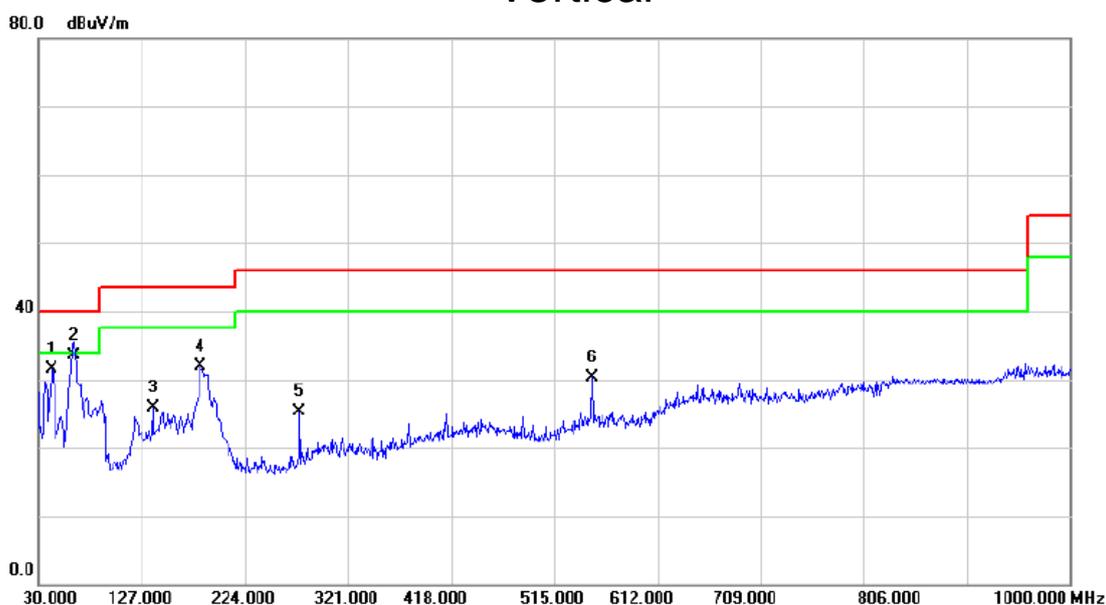

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		42.6100	45.33	-13.92	31.41	40.00	-8.59	QP	
2	*	62.9800	48.69	-15.20	33.49	40.00	-6.51	QP	
3		137.6700	40.61	-14.63	25.98	43.50	-17.52	QP	
4		182.2900	47.62	-15.70	31.92	43.50	-11.58	QP	
5		275.4100	39.45	-14.07	25.38	46.00	-20.62	QP	
6		550.8900	38.37	-7.97	30.40	46.00	-15.60	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Earphone: MERRY H


## Horizontal

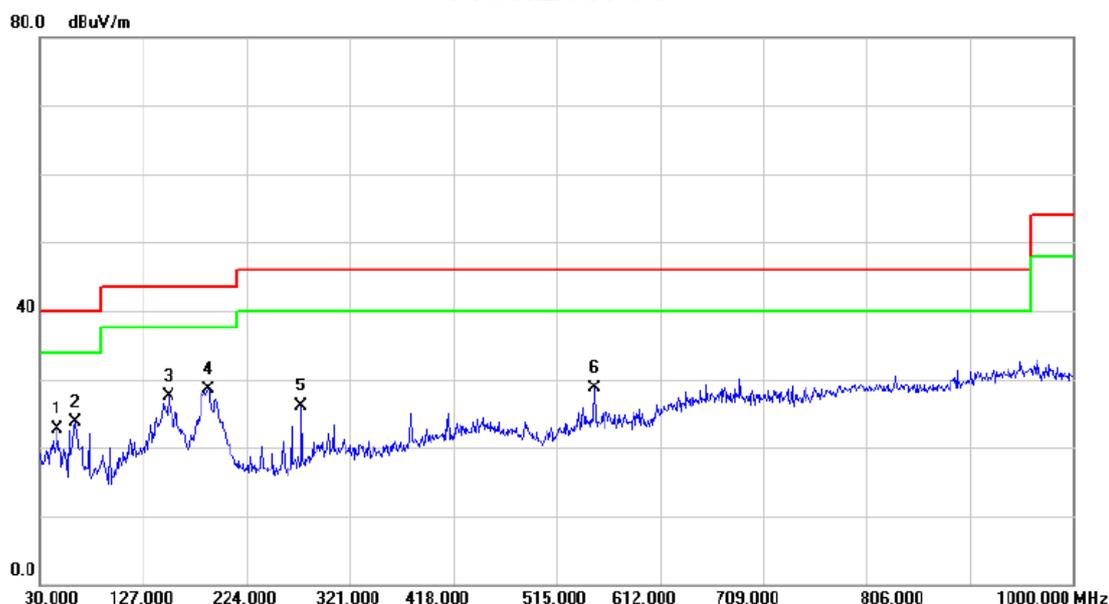

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		46.4900	36.33	-13.69	22.64	40.00	-17.36	QP	
2		62.9800	38.96	-15.20	23.76	40.00	-16.24	QP	
3		150.2800	41.49	-14.04	27.45	43.50	-16.05	QP	
4	*	188.1100	44.92	-16.44	28.48	43.50	-15.02	QP	
5		275.4100	40.17	-14.07	26.10	46.00	-19.90	QP	
6		550.8900	36.69	-7.97	28.72	46.00	-17.28	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: YINYJU +USB Cable: HONGLIN +Earphone: MERRY H


## Vertical

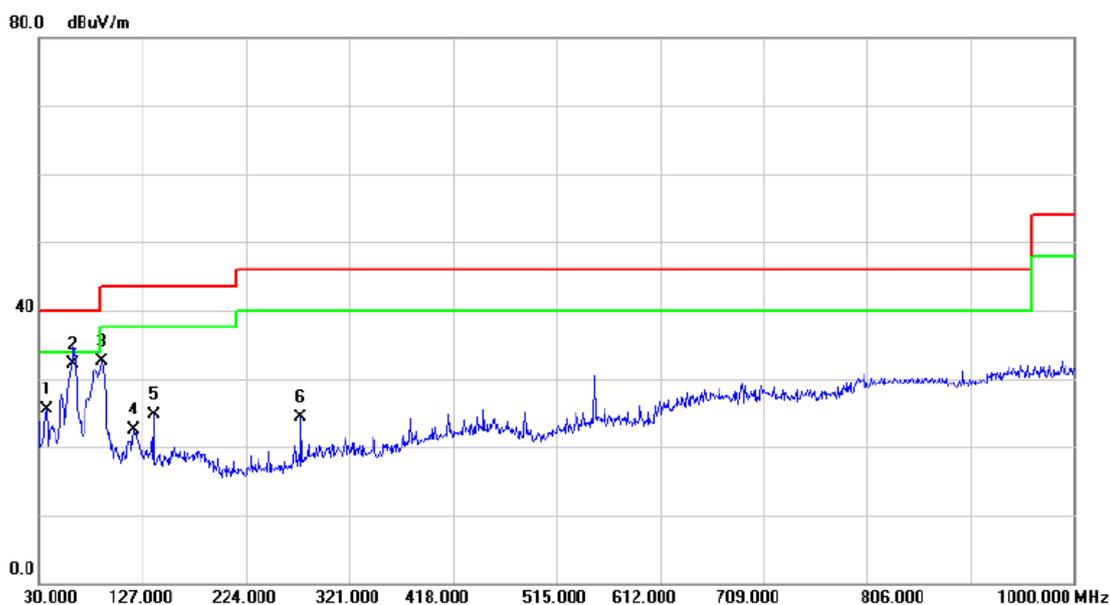

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		36.7900	40.36	-14.81	25.55	40.00	-14.45	QP	
2	*	62.0100	47.18	-15.04	32.14	40.00	-7.86	QP	
3		89.1700	52.66	-20.14	32.52	43.50	-10.98	QP	
4		118.2700	39.01	-16.42	22.59	43.50	-20.91	QP	
5		137.6700	39.33	-14.63	24.70	43.50	-18.80	QP	
6		275.4100	38.31	-14.07	24.24	46.00	-21.76	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: YINYJU +USB Cable: HONGLIN +Earphone: MERRY H


## Horizontal

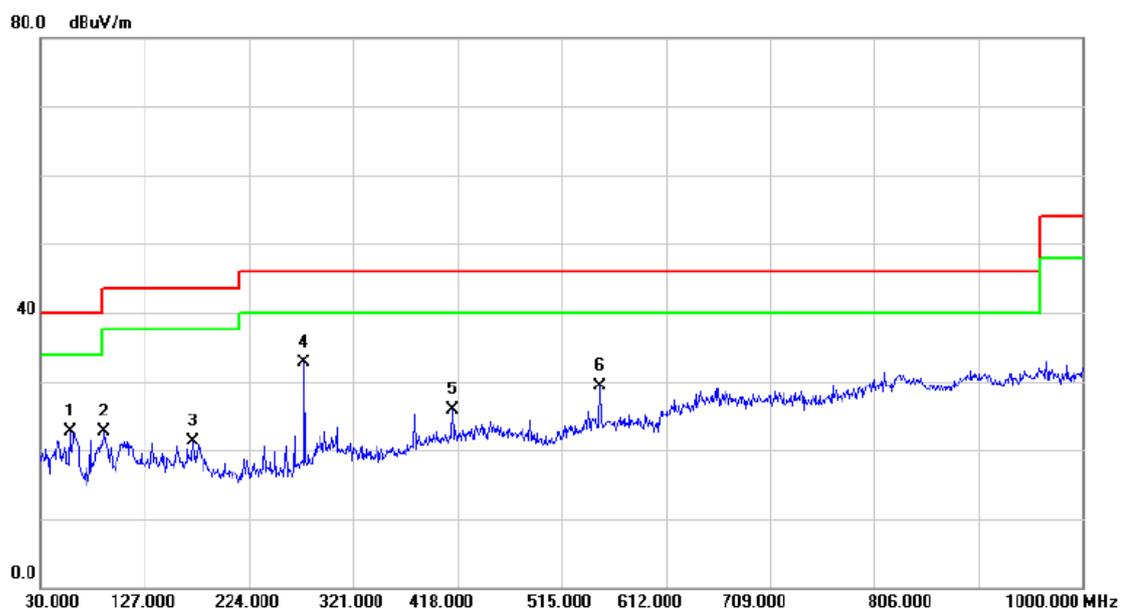

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		57.1600	37.16	-14.44	22.72	40.00	-17.28	QP	
2		89.1700	42.82	-20.14	22.68	43.50	-20.82	QP	
3		171.6200	35.82	-14.57	21.25	43.50	-22.25	QP	
4	*	275.4100	46.71	-14.07	32.64	46.00	-13.36	QP	
5		413.1500	36.55	-10.71	25.84	46.00	-20.16	QP	
6		550.8900	37.33	-7.97	29.36	46.00	-16.64	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+5G wifi+gps+bt
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Vertical

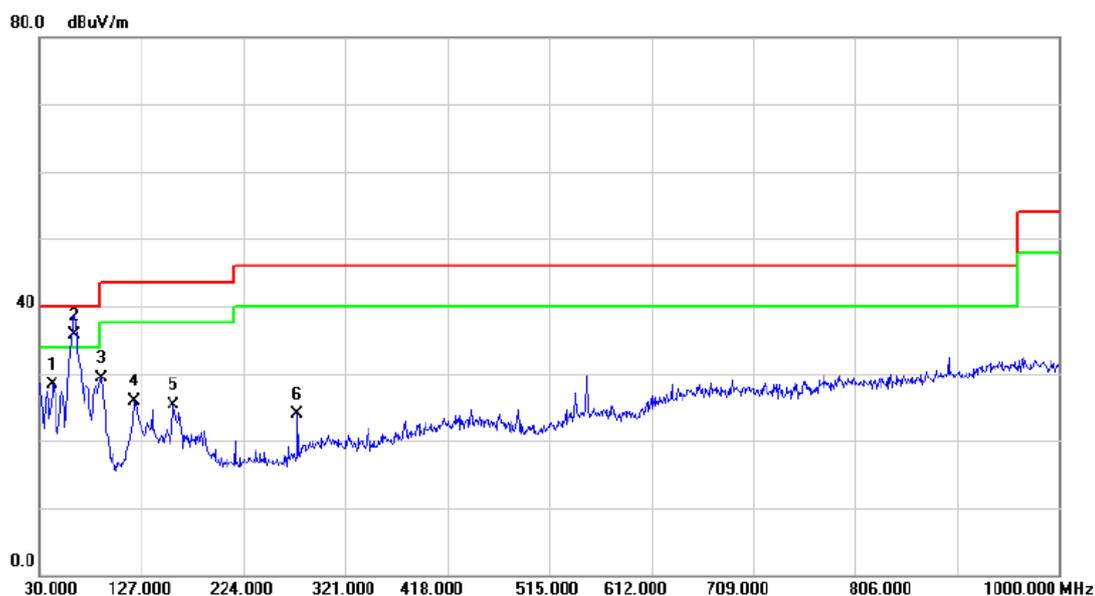

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		42.6100	42.24	-13.92	28.32	40.00	-11.68	QP	
2	*	62.9800	50.94	-15.20	35.74	40.00	-4.26	QP	
3		89.1700	49.49	-20.14	29.35	43.50	-14.15	QP	
4		119.2400	42.29	-16.31	25.98	43.50	-17.52	QP	
5		157.0700	39.24	-13.96	25.28	43.50	-18.22	QP	
6		275.4100	37.91	-14.07	23.84	46.00	-22.16	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+5G wifi+gps+bt
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Horizontal

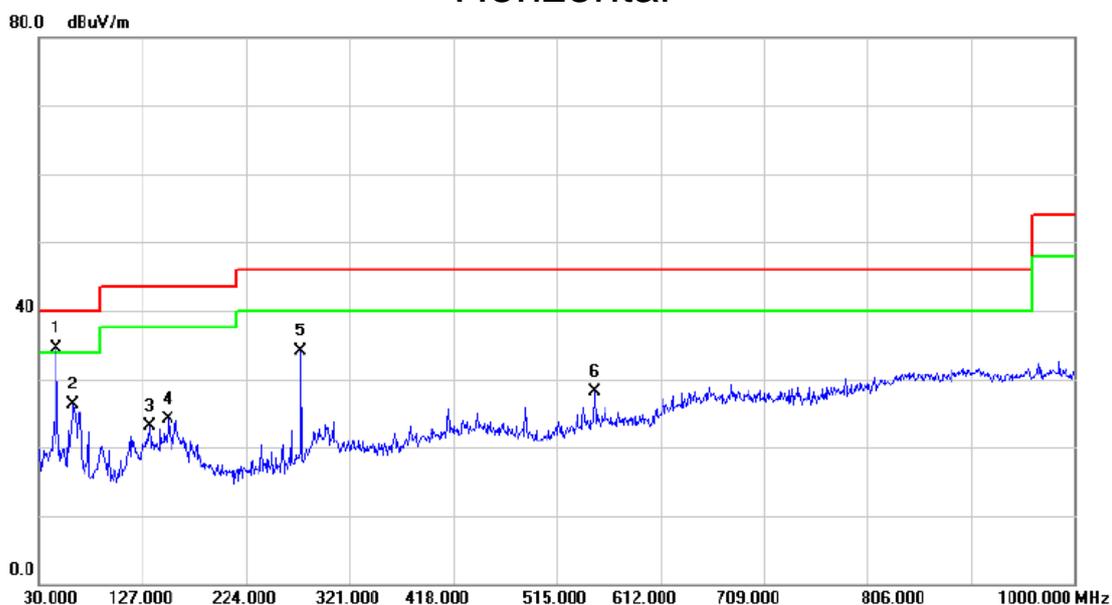

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	46.4900	48.23	-13.69	34.54	40.00	-5.46	QP	
2		62.0100	41.41	-15.04	26.37	40.00	-13.63	QP	
3		133.7900	38.06	-14.97	23.09	43.50	-20.41	QP	
4		151.2500	38.16	-14.04	24.12	43.50	-19.38	QP	
5		275.4100	48.09	-14.07	34.02	46.00	-11.98	QP	
6		550.8900	36.14	-7.97	28.17	46.00	-17.83	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Vertical

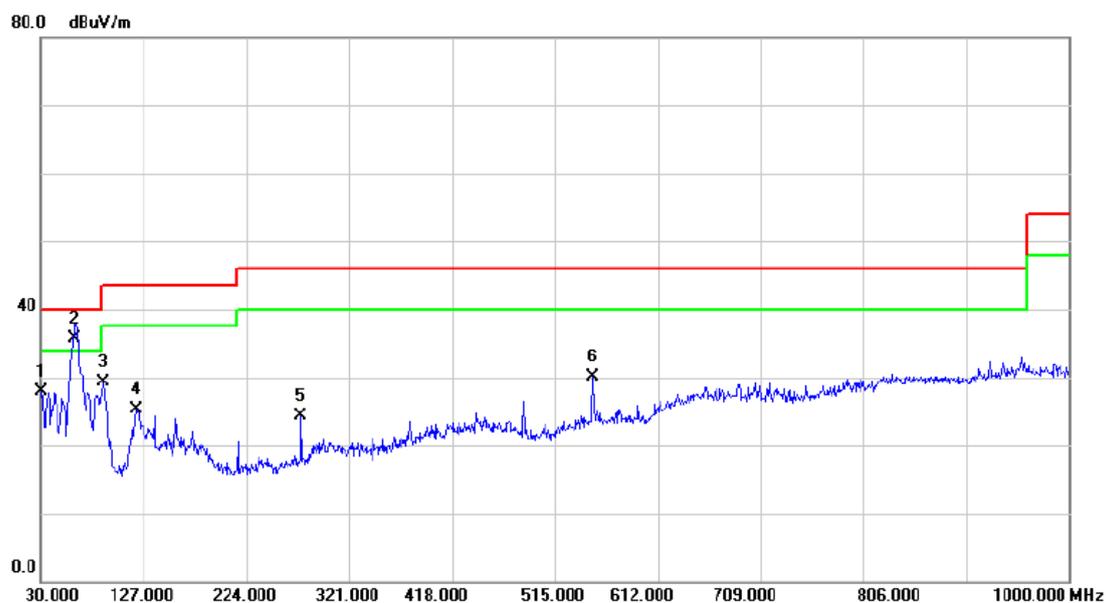

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	43.01	-15.08	27.93	40.00	-12.07	QP	
2	*	62.0100	50.84	-15.04	35.80	40.00	-4.20	QP	
3		89.1700	49.39	-20.14	29.25	43.50	-14.25	QP	
4		120.2100	41.60	-16.20	25.40	43.50	-18.10	QP	
5		275.4100	38.37	-14.07	24.30	46.00	-21.70	QP	
6		550.8900	38.09	-7.97	30.12	46.00	-15.88	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Horizontal

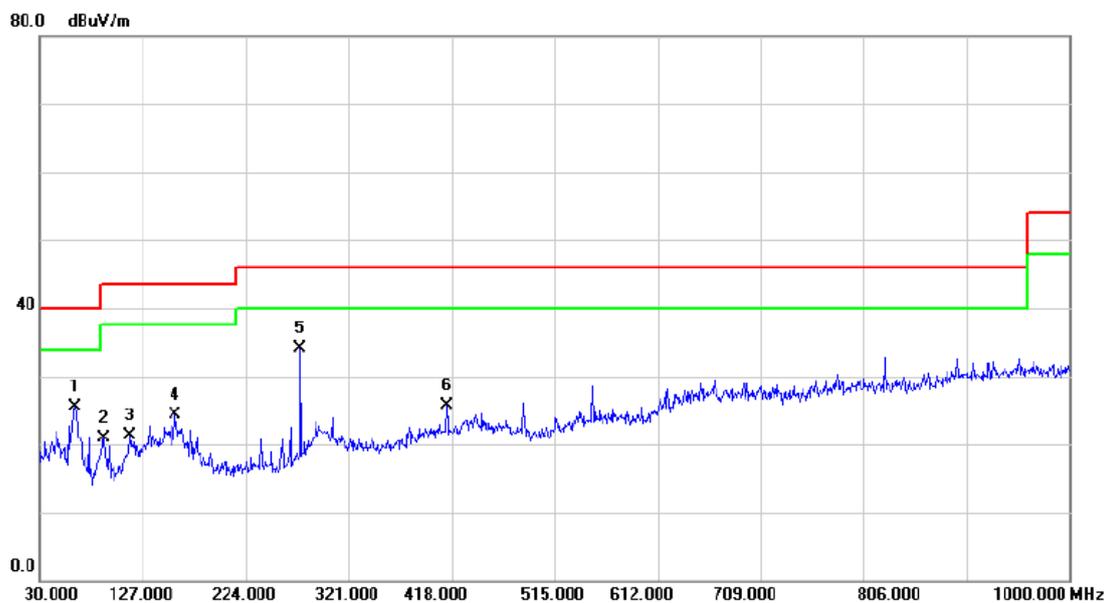

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		62.9800	40.75	-15.20	25.55	40.00	-14.45	QP	
2		90.1400	41.11	-20.30	20.81	43.50	-22.69	QP	
3		114.3900	38.09	-16.83	21.26	43.50	-22.24	QP	
4		157.0700	38.23	-13.96	24.27	43.50	-19.23	QP	
5	*	275.4100	48.26	-14.07	34.19	46.00	-11.81	QP	
6		413.1500	36.46	-10.71	25.75	46.00	-20.25	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Vertical

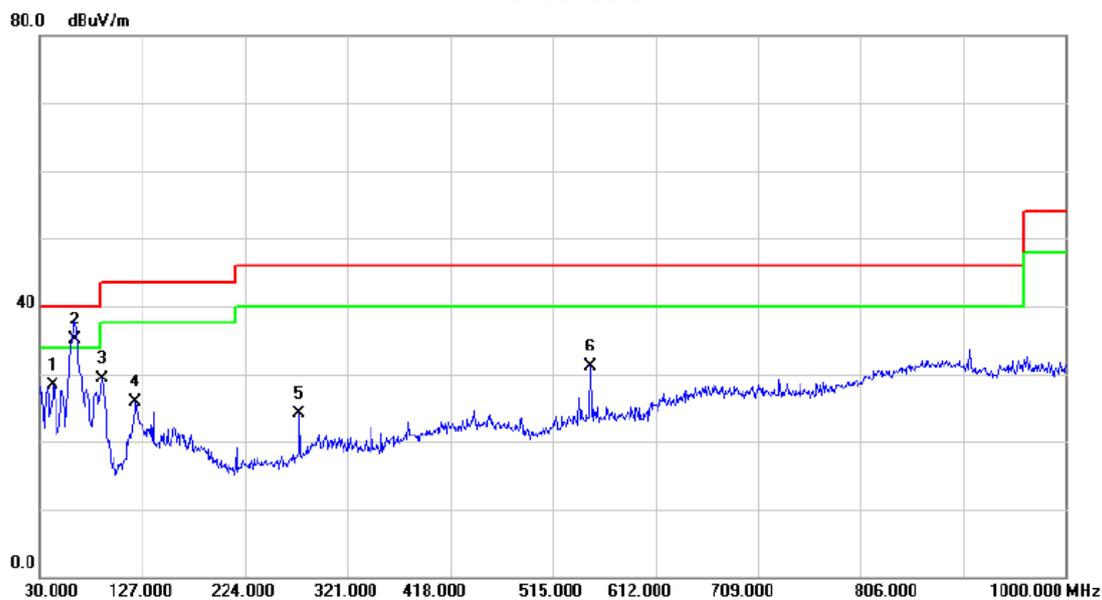

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		42.6100	42.25	-13.92	28.33	40.00	-11.67	QP	
2	*	62.9800	50.29	-15.20	35.09	40.00	-4.91	QP	
3		88.2000	49.29	-19.92	29.37	43.50	-14.13	QP	
4		120.2100	42.15	-16.20	25.95	43.50	-17.55	QP	
5		275.4100	38.16	-14.07	24.09	46.00	-21.91	QP	
6		550.8900	38.99	-7.97	31.02	46.00	-14.98	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Horizontal

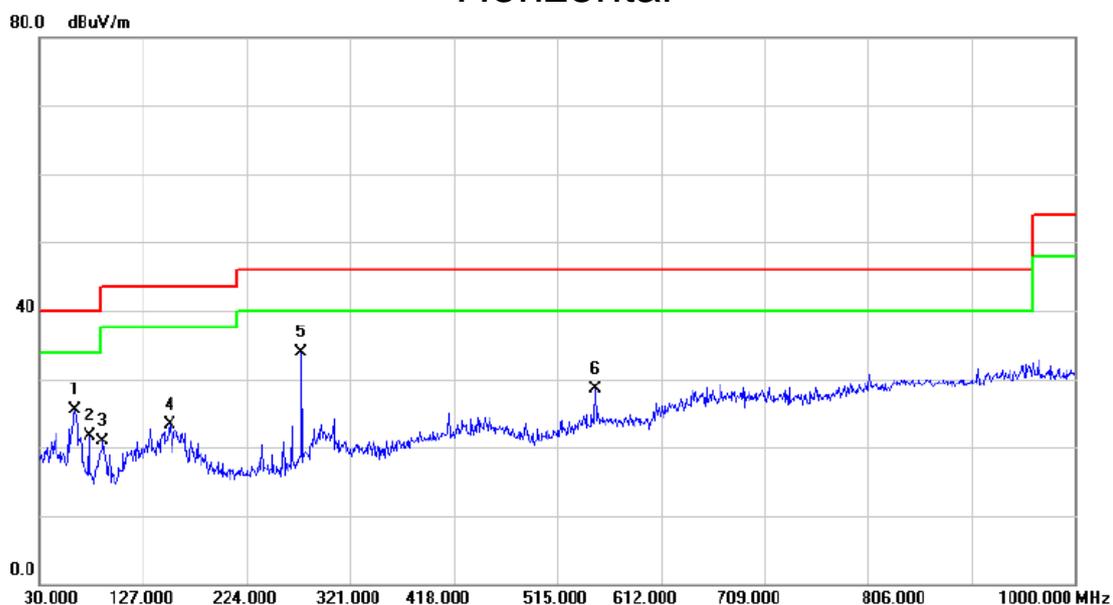

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		62.9800	40.64	-15.20	25.44	40.00	-14.56	QP	
2		76.5600	39.11	-17.48	21.63	40.00	-18.37	QP	
3		89.1700	41.12	-20.14	20.98	43.50	-22.52	QP	
4		152.2200	37.36	-14.03	23.33	43.50	-20.17	QP	
5	*	275.4100	47.92	-14.07	33.85	46.00	-12.15	QP	
6		550.8900	36.45	-7.97	28.48	46.00	-17.52	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Vertical

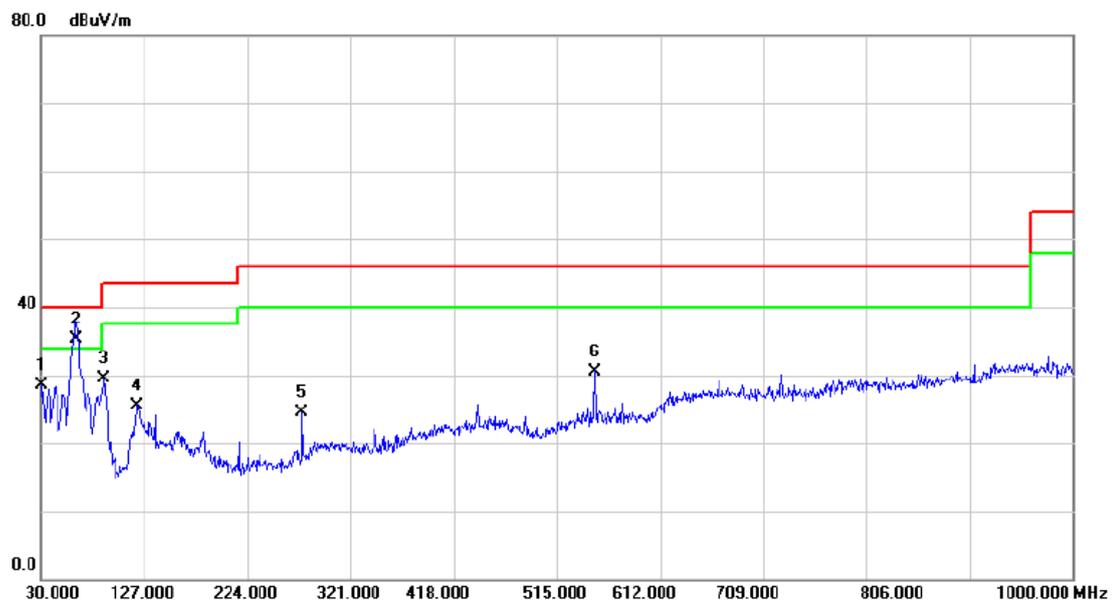

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	43.50	-15.08	28.42	40.00	-11.58	QP	
2	*	62.9800	50.46	-15.20	35.26	40.00	-4.74	QP	
3		89.1700	49.74	-20.14	29.60	43.50	-13.90	QP	
4		120.2100	41.80	-16.20	25.60	43.50	-17.90	QP	
5		275.4100	38.58	-14.07	24.51	46.00	-21.49	QP	
6		550.8900	38.57	-7.97	30.60	46.00	-15.40	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Horizontal

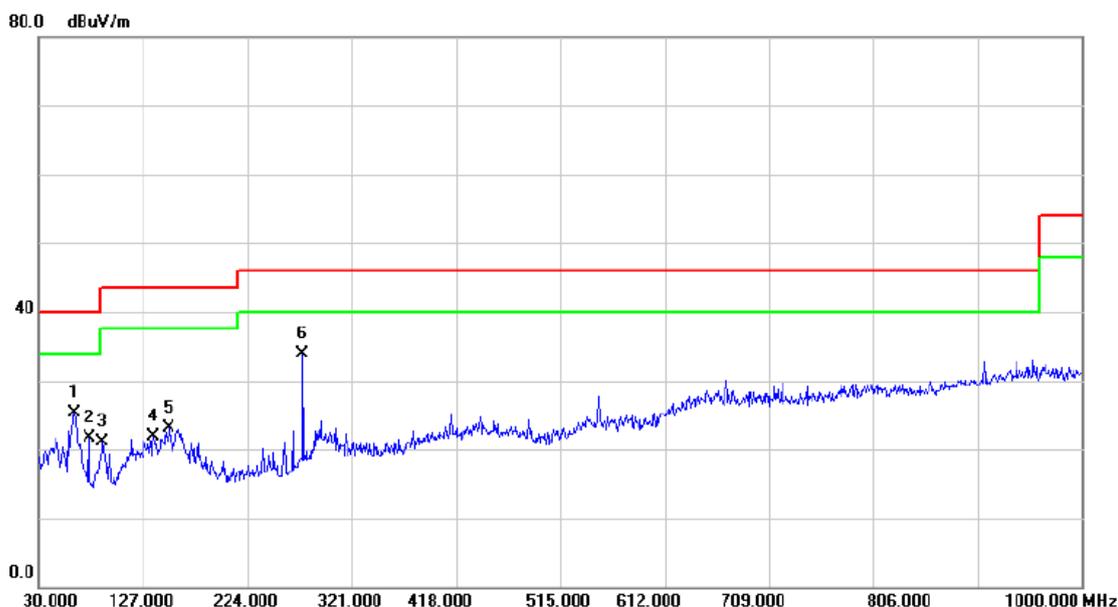

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		62.9800	40.47	-15.20	25.27	40.00	-14.73	QP	
2		76.5600	39.26	-17.48	21.78	40.00	-18.22	QP	
3		89.1700	41.27	-20.14	21.13	43.50	-22.37	QP	
4		136.7000	36.55	-14.73	21.82	43.50	-21.68	QP	
5		151.2500	37.08	-14.04	23.04	43.50	-20.46	QP	
6	*	275.4100	48.06	-14.07	33.99	46.00	-12.01	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Vertical

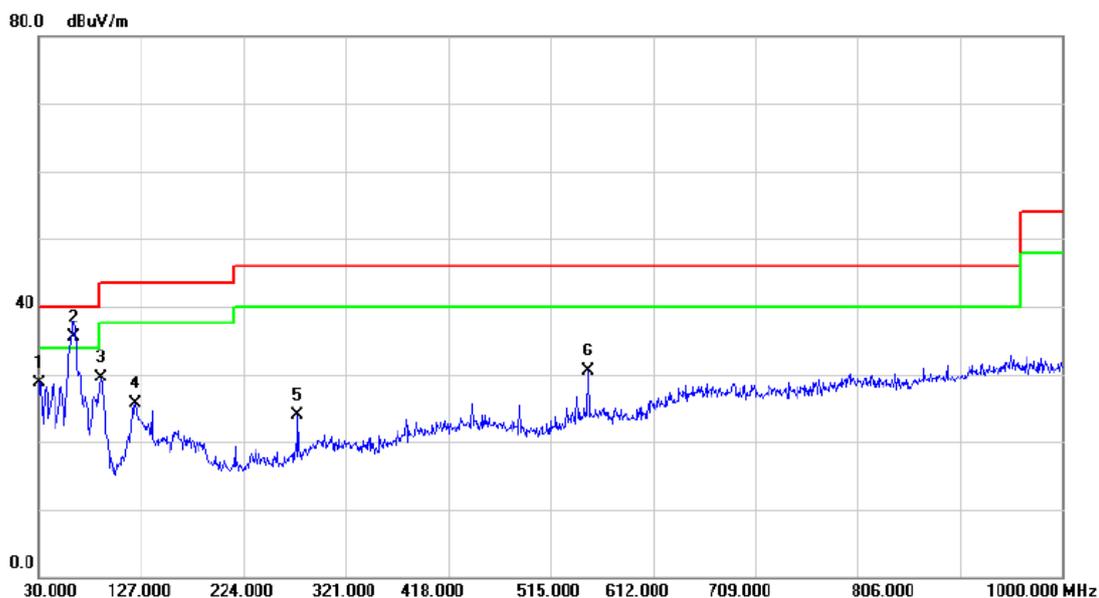

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	30.0000	43.78	-15.08	28.70	40.00	-11.30	QP	
2 *	62.9800	50.69	-15.20	35.49	40.00	-4.51	QP	
3	89.1700	49.72	-20.14	29.58	43.50	-13.92	QP	
4	121.1800	41.81	-16.11	25.70	43.50	-17.80	QP	
5	275.4100	37.90	-14.07	23.83	46.00	-22.17	QP	
6	550.8900	38.48	-7.97	30.51	46.00	-15.49	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Horizontal

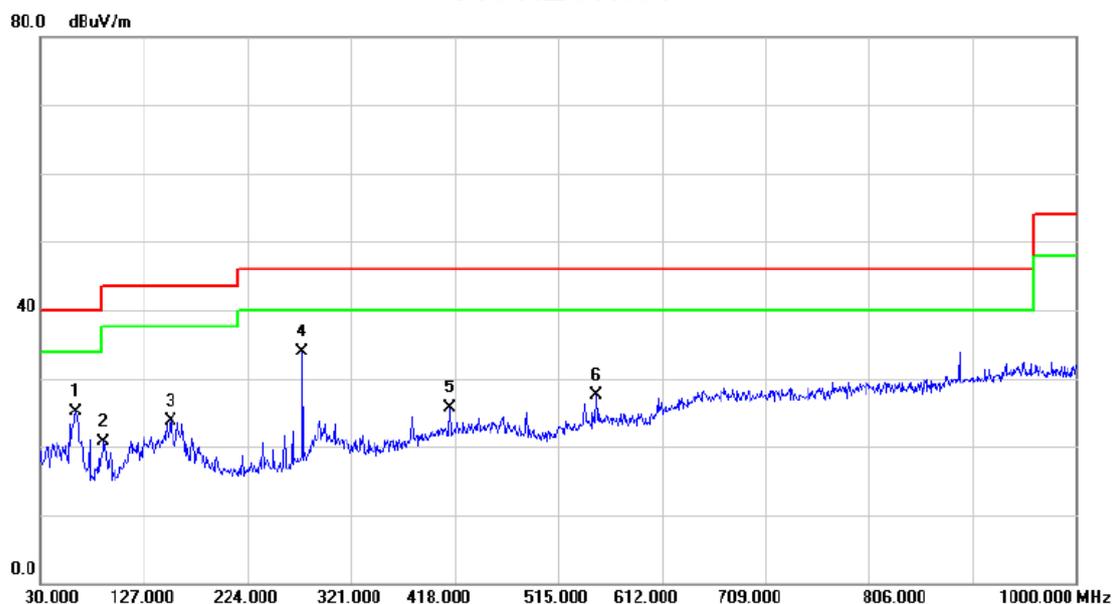

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		62.9800	40.35	-15.20	25.15	40.00	-14.85	QP	
2		89.1700	40.82	-20.14	20.68	43.50	-22.82	QP	
3		152.2200	37.79	-14.03	23.76	43.50	-19.74	QP	
4	*	275.4100	47.93	-14.07	33.86	46.00	-12.14	QP	
5		413.1500	36.40	-10.71	25.69	46.00	-20.31	QP	
6		550.8900	35.48	-7.97	27.51	46.00	-18.49	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle
Note:	USB Cable: Pang Ngai +Earphone: GoerTek Inc


## Vertical

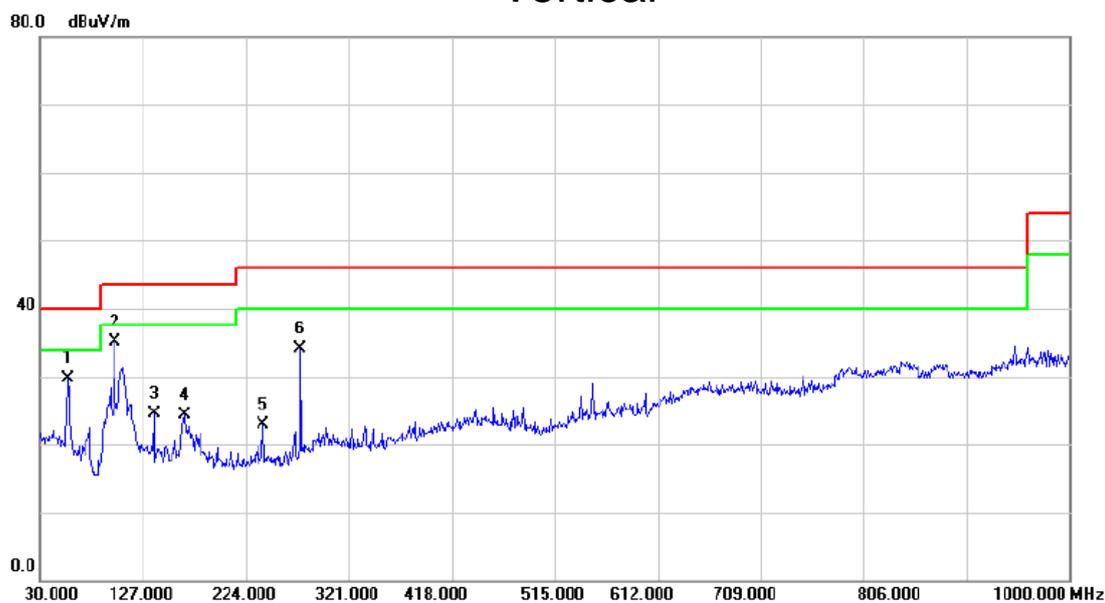

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		56.1900	44.07	-14.34	29.73	40.00	-10.27	QP	
2	*	99.8400	54.00	-18.84	35.16	43.50	-8.34	QP	
3		137.6700	39.22	-14.63	24.59	43.50	-18.91	QP	
4		166.7700	38.66	-14.26	24.40	43.50	-19.10	QP	
5		239.5200	38.11	-15.28	22.83	46.00	-23.17	QP	
6		275.4100	48.13	-14.07	34.06	46.00	-11.94	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle
Note:	USB Cable: Pang Ngai +Earphone: GoerTek Inc

## Horizontal

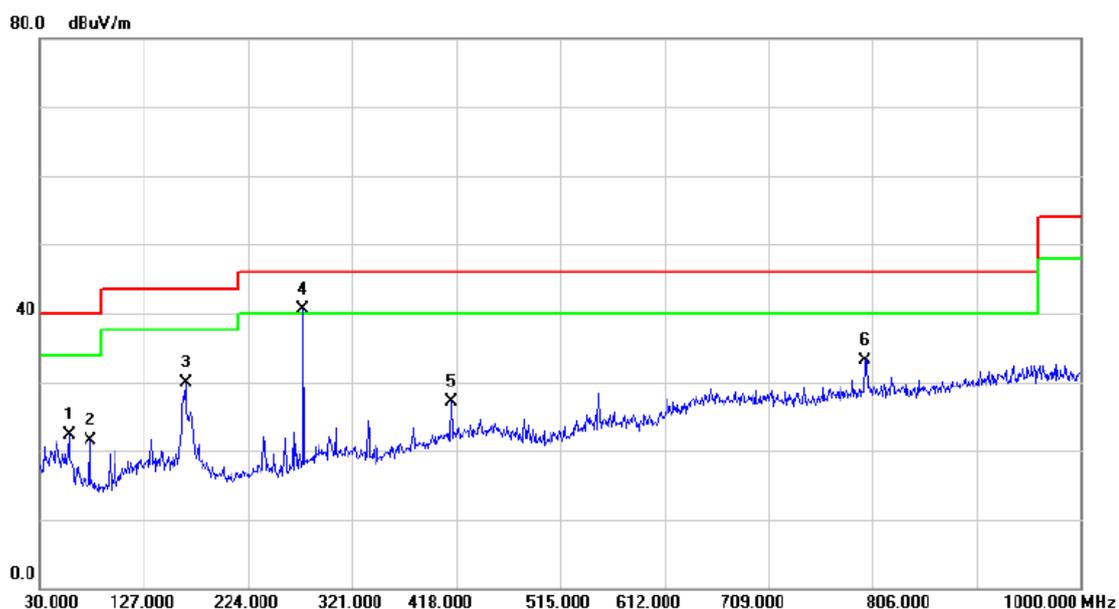


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	57.1600	36.82	-14.44	22.38	40.00	-17.62	QP	
2	76.5600	39.02	-17.48	21.54	40.00	-18.46	QP	
3	165.8000	44.05	-14.21	29.84	43.50	-13.66	QP	
4 *	275.4100	54.62	-14.07	40.55	46.00	-5.45	QP	
5	413.1500	37.88	-10.71	27.17	46.00	-18.83	QP	
6	798.2400	37.94	-4.76	33.18	46.00	-12.82	QP	

## **ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)**

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Vertical

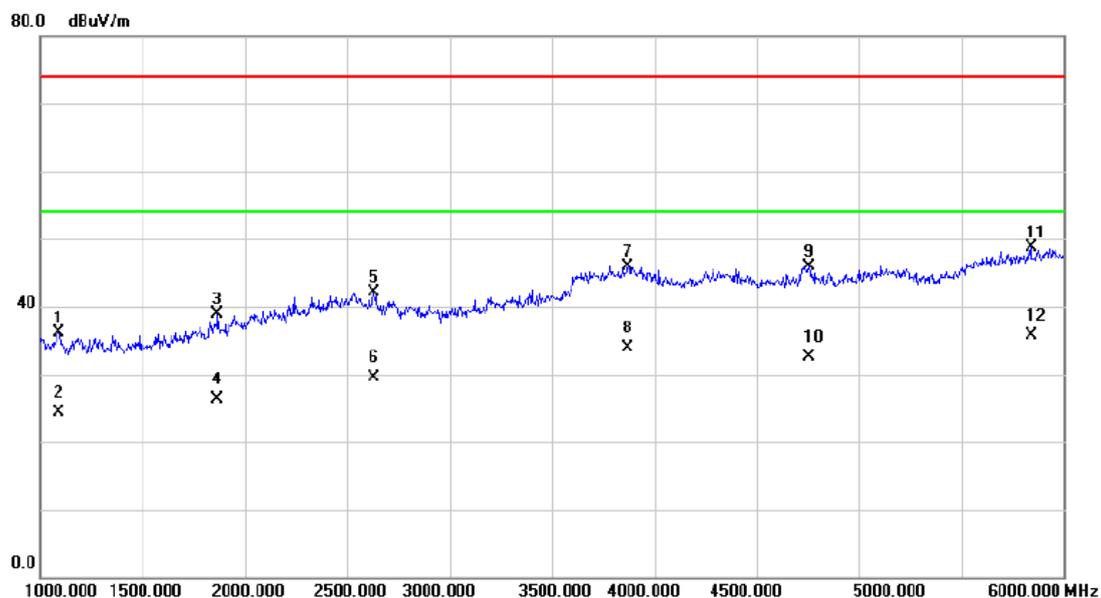

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1090.000	41.29	-5.27	36.02	74.00	-37.98	peak	
2		1090.000	29.62	-5.27	24.35	54.00	-29.65	AVG	
3		1865.000	41.33	-2.47	38.86	74.00	-35.14	peak	
4		1865.000	28.81	-2.47	26.34	54.00	-27.66	AVG	
5		2630.000	41.52	0.54	42.06	74.00	-31.94	peak	
6		2630.000	28.97	0.54	29.51	54.00	-24.49	AVG	
7		3870.000	40.31	5.67	45.98	74.00	-28.02	peak	
8		3870.000	28.17	5.67	33.84	54.00	-20.16	AVG	
9		4755.000	38.64	7.29	45.93	74.00	-28.07	peak	
10		4755.000	25.26	7.29	32.55	54.00	-21.45	AVG	
11		5840.000	39.08	9.56	48.64	74.00	-25.36	peak	
12	*	5840.000	26.14	9.56	35.70	54.00	-18.30	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Horizontal

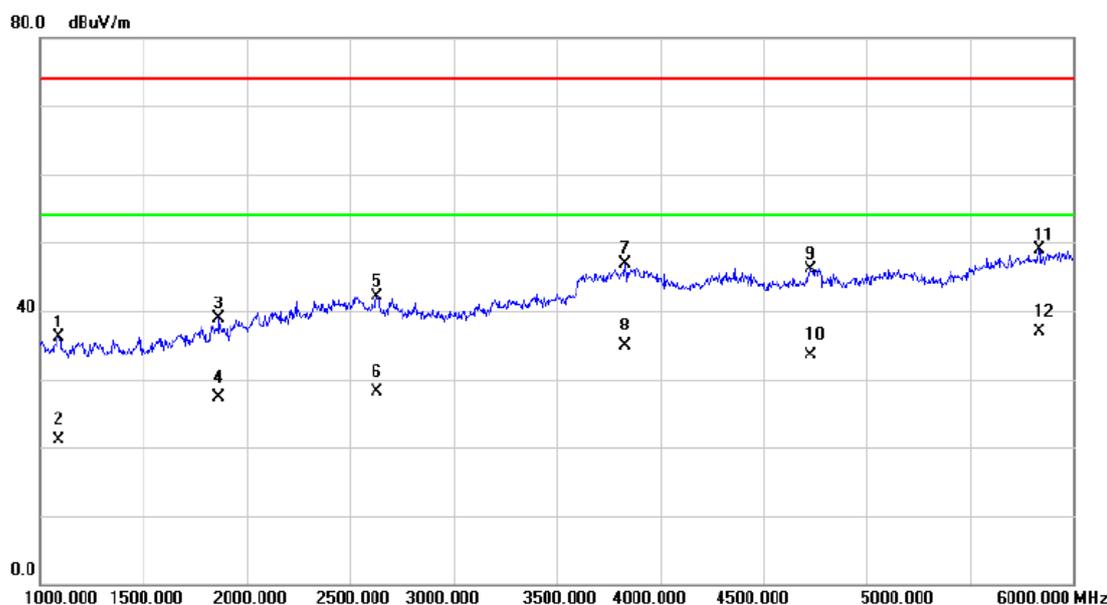

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1090.000	41.29	-5.27	36.02	74.00	-37.98	peak	
2		1090.000	26.29	-5.27	21.02	54.00	-32.98	AVG	
3		1865.000	41.33	-2.47	38.86	74.00	-35.14	peak	
4		1865.000	29.71	-2.47	27.24	54.00	-26.76	AVG	
5		2630.000	41.52	0.54	42.06	74.00	-31.94	peak	
6		2630.000	27.56	0.54	28.10	54.00	-25.90	AVG	
7		3830.000	41.52	5.39	46.91	74.00	-27.09	peak	
8		3830.000	29.57	5.39	34.96	54.00	-19.04	AVG	
9		4730.000	38.94	7.25	46.19	74.00	-27.81	peak	
10		4730.000	26.29	7.25	33.54	54.00	-20.46	AVG	
11		5835.000	39.27	9.54	48.81	74.00	-25.19	peak	
12	*	5835.000	27.46	9.54	37.00	54.00	-17.00	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Vertical

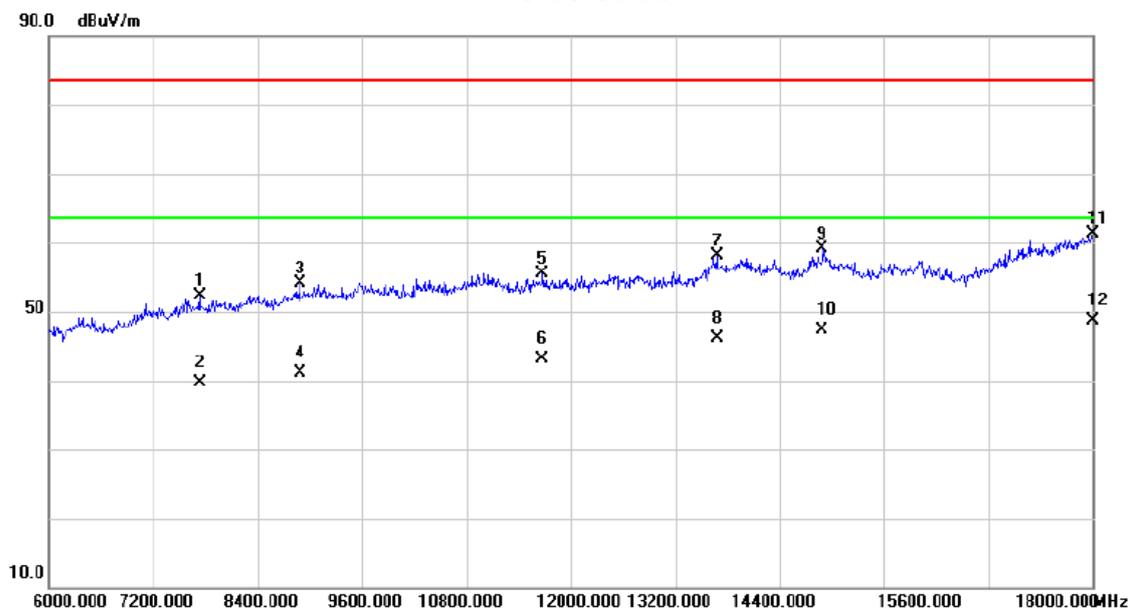

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7728.000	36.23	16.03	52.26	83.50	-31.24	peak	
2		7728.000	23.74	16.03	39.77	63.50	-23.73	AVG	
3		8880.000	38.16	15.97	54.13	83.50	-29.37	peak	
4		8880.000	25.12	15.97	41.09	63.50	-22.41	AVG	
5		11676.00	34.24	21.26	55.50	83.50	-28.00	peak	
6		11676.00	21.94	21.26	43.20	63.50	-20.30	AVG	
7		13680.00	34.54	23.62	58.16	83.50	-25.34	peak	
8		13680.00	22.53	23.62	46.15	63.50	-17.35	AVG	
9		14892.00	33.95	25.25	59.20	83.50	-24.30	peak	
10		14892.00	22.01	25.25	47.26	63.50	-16.24	AVG	
11		18000.00	27.81	33.46	61.27	83.50	-22.23	peak	
12	*	18000.00	15.23	33.46	48.69	63.50	-14.81	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Horizontal

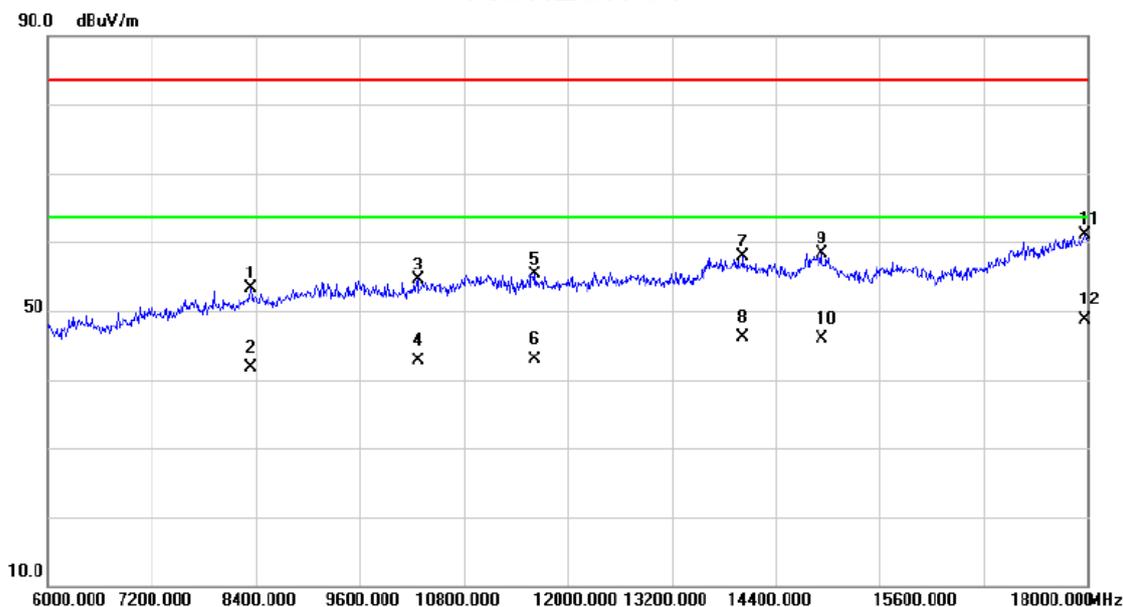

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		8340.000	37.70	15.61	53.31	83.50	-30.19	peak	
2		8340.000	26.03	15.61	41.64	63.50	-21.86	AVG	
3		10272.00	39.53	14.93	54.46	83.50	-29.04	peak	
4		10272.00	27.86	14.93	42.79	63.50	-20.71	AVG	
5		11628.00	34.44	20.95	55.39	83.50	-28.11	peak	
6		11628.00	22.00	20.95	42.95	63.50	-20.55	AVG	
7		14028.00	32.52	25.37	57.89	83.50	-25.61	peak	
8		14028.00	20.83	25.37	46.20	63.50	-17.30	AVG	
9		14928.00	33.18	25.18	58.36	83.50	-25.14	peak	
10		14928.00	20.68	25.18	45.86	63.50	-17.64	AVG	
11		17976.00	28.06	33.14	61.20	83.50	-22.30	peak	
12	*	17976.00	15.47	33.14	48.61	63.50	-14.89	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc V


## Vertical

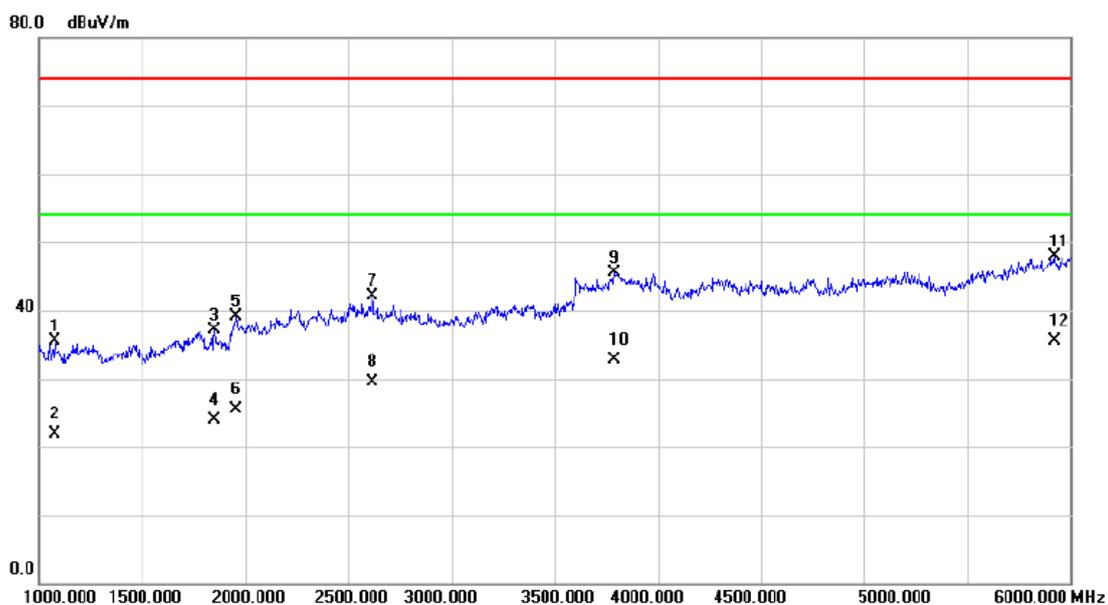

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1075.000	40.77	-5.32	35.45	74.00	-38.55	peak	
2		1075.000	27.32	-5.32	22.00	54.00	-32.00	AVG	
3		1850.000	39.57	-2.54	37.03	74.00	-36.97	peak	
4		1850.000	26.45	-2.54	23.91	54.00	-30.09	AVG	
5		1955.000	41.09	-2.08	39.01	74.00	-34.99	peak	
6		1955.000	27.64	-2.08	25.56	54.00	-28.44	AVG	
7		2615.000	41.63	0.48	42.11	74.00	-31.89	peak	
8		2615.000	29.11	0.48	29.59	54.00	-24.41	AVG	
9		3790.000	40.44	5.10	45.54	74.00	-28.46	peak	
10		3790.000	27.53	5.10	32.63	54.00	-21.37	AVG	
11		5920.000	38.21	9.66	47.87	74.00	-26.13	peak	
12	*	5920.000	25.90	9.66	35.56	54.00	-18.44	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: BYD+USB Cable: Pang Ngai +Earphone: GoerTek Inc V


## Horizontal

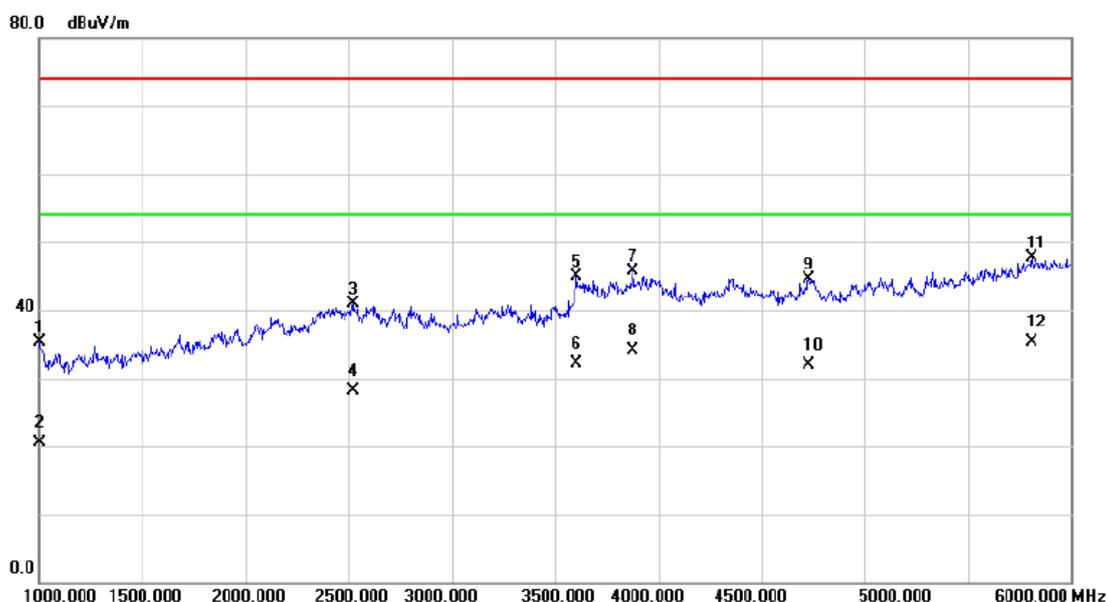

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1000.000	40.89	-5.54	35.35	74.00	-38.65	peak	
2		1000.000	26.07	-5.54	20.53	54.00	-33.47	AVG	
3		2520.000	40.79	0.14	40.93	74.00	-33.07	peak	
4		2520.000	28.03	0.14	28.17	54.00	-25.83	AVG	
5		3605.000	41.13	3.76	44.89	74.00	-29.11	peak	
6		3605.000	28.43	3.76	32.19	54.00	-21.81	AVG	
7		3875.000	39.91	5.72	45.63	74.00	-28.37	peak	
8		3875.000	28.37	5.72	34.09	54.00	-19.91	AVG	
9		4730.000	37.28	7.25	44.53	74.00	-29.47	peak	
10		4730.000	24.68	7.25	31.93	54.00	-22.07	AVG	
11		5810.000	38.16	9.52	47.68	74.00	-26.32	peak	
12	*	5810.000	25.75	9.52	35.27	54.00	-18.73	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: HK+USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Vertical

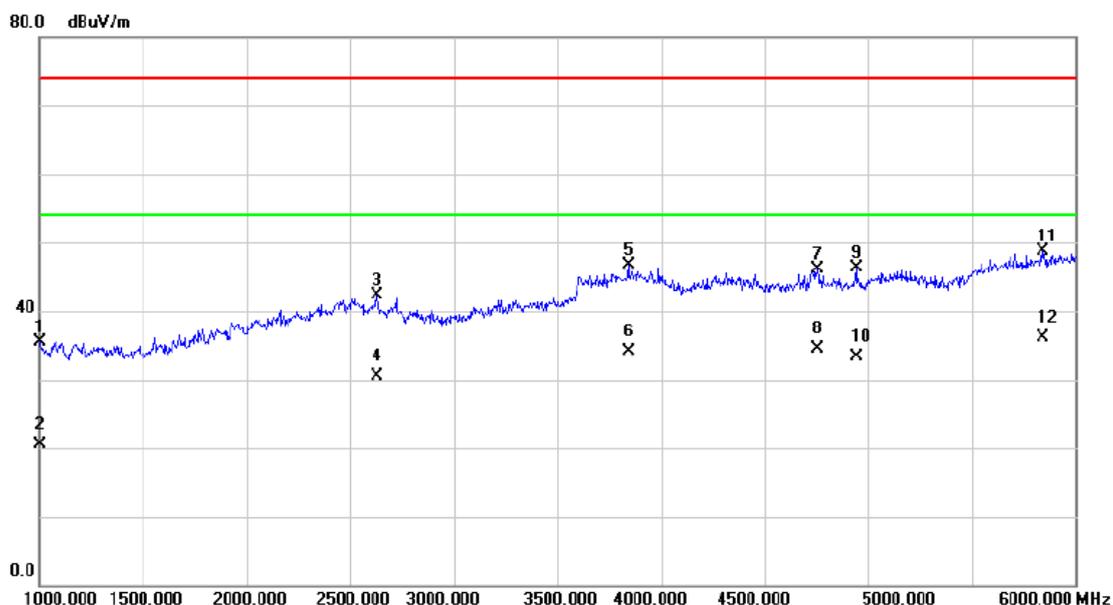

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1000.000	41.13	-5.54	35.59	74.00	-38.41	peak	
2		1000.000	25.96	-5.54	20.42	54.00	-33.58	AVG	
3		2630.000	41.82	0.54	42.36	74.00	-31.64	peak	
4		2630.000	29.89	0.54	30.43	54.00	-23.57	AVG	
5		3840.000	41.16	5.46	46.62	74.00	-27.38	peak	
6		3840.000	28.64	5.46	34.10	54.00	-19.90	AVG	
7		4755.000	38.76	7.29	46.05	74.00	-27.95	peak	
8		4755.000	27.18	7.29	34.47	54.00	-19.53	AVG	
9		4940.000	38.75	7.55	46.30	74.00	-27.70	peak	
10		4940.000	25.77	7.55	33.32	54.00	-20.68	AVG	
11		5840.000	39.08	9.56	48.64	74.00	-25.36	peak	
12	*	5840.000	26.46	9.56	36.02	54.00	-17.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: HK+USB Cable: Pang Ngai +Earphone: GoerTek Inc H

## Horizontal

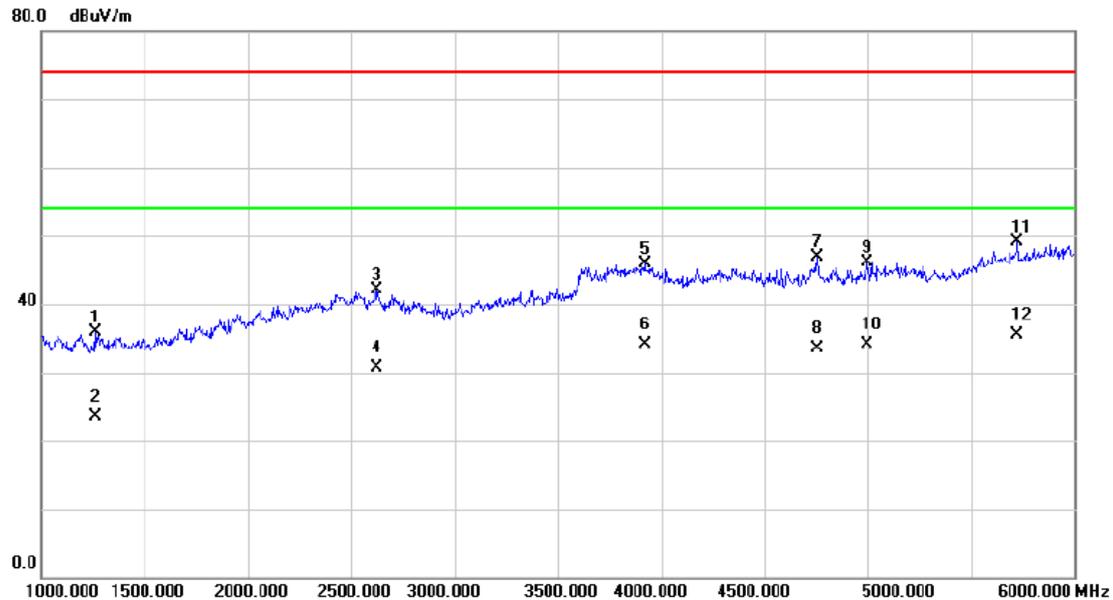

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1260.000	40.61	-4.78	35.83	74.00	-38.17	peak	
2		1260.000	28.32	-4.78	23.54	54.00	-30.46	AVG	
3		2625.000	41.66	0.53	42.19	74.00	-31.81	peak	
4		2625.000	30.22	0.53	30.75	54.00	-23.25	AVG	
5		3920.000	39.92	6.04	45.96	74.00	-28.04	peak	
6		3920.000	27.97	6.04	34.01	54.00	-19.99	AVG	
7		4755.000	39.63	7.29	46.92	74.00	-27.08	peak	
8		4755.000	26.28	7.29	33.57	54.00	-20.43	AVG	
9		4995.000	38.47	7.63	46.10	74.00	-27.90	peak	
10		4995.000	26.40	7.63	34.03	54.00	-19.97	AVG	
11		5725.000	39.70	9.41	49.11	74.00	-24.89	peak	
12	*	5725.000	26.05	9.41	35.46	54.00	-18.54	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Earphone: MERRY H

## Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1090.000	41.04	-5.27	35.77	74.00	-38.23	peak	
2		1090.000	27.69	-5.27	22.42	54.00	-31.58	AVG	
3		2525.000	41.54	0.17	41.71	74.00	-32.29	peak	
4		2525.000	29.34	0.17	29.51	54.00	-24.49	AVG	
5		3695.000	40.95	4.41	45.36	74.00	-28.64	peak	
6		3695.000	29.00	4.41	33.41	54.00	-20.59	AVG	
7		3890.000	40.93	5.83	46.76	74.00	-27.24	peak	
8		3890.000	29.39	5.83	35.22	54.00	-18.78	AVG	
9		4735.000	39.24	7.26	46.50	74.00	-27.50	peak	
10		4735.000	26.98	7.26	34.24	54.00	-19.76	AVG	
11		5835.000	39.13	9.54	48.67	74.00	-25.33	peak	
12	*	5835.000	26.45	9.54	35.99	54.00	-18.01	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: PHITEK +USB Cable: HONGLIN +Earphone: MERRY H

## Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1780.000	44.70	-2.84	41.86	74.00	-32.14	peak	
2		1780.000	32.07	-2.84	29.23	54.00	-24.77	AVG	
3		2540.000	41.82	0.23	42.05	74.00	-31.95	peak	
4		2540.000	28.24	0.23	28.47	54.00	-25.53	AVG	
5		3790.000	41.16	5.10	46.26	74.00	-27.74	peak	
6		3790.000	27.53	5.10	32.63	54.00	-21.37	AVG	
7		4735.000	38.58	7.26	45.84	74.00	-28.16	peak	
8		4735.000	24.67	7.26	31.93	54.00	-22.07	AVG	
9		5125.000	38.47	8.01	46.48	74.00	-27.52	peak	
10		5125.000	25.02	8.01	33.03	54.00	-20.97	AVG	
11		5985.000	39.47	9.73	49.20	74.00	-24.80	peak	
12	*	5985.000	27.16	9.73	36.89	54.00	-17.11	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: YINYJU +USB Cable: HONGLIN +Earphone: MERRY H


## Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1010.000	41.50	-5.51	35.99	74.00	-38.01	peak	
2		1010.000	28.73	-5.51	23.22	54.00	-30.78	AVG	
3		2515.000	42.03	0.13	42.16	74.00	-31.84	peak	
4		2515.000	29.43	0.13	29.56	54.00	-24.44	AVG	
5		3755.000	42.07	4.85	46.92	74.00	-27.08	peak	
6		3755.000	29.93	4.85	34.78	54.00	-19.22	AVG	
7		4240.000	39.19	6.77	45.96	74.00	-28.04	peak	
8		4240.000	26.41	6.77	33.18	54.00	-20.82	AVG	
9		4730.000	39.02	7.25	46.27	74.00	-27.73	peak	
10		4730.000	26.39	7.25	33.64	54.00	-20.36	AVG	
11		5910.000	39.41	9.64	49.05	74.00	-24.95	peak	
12	*	5910.000	26.76	9.64	36.40	54.00	-17.60	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+2.4G wifi+gps+bt
Note:	Adapter: YINYJU +USB Cable: HONGLIN +Earphone: MERRY H


## Horizontal

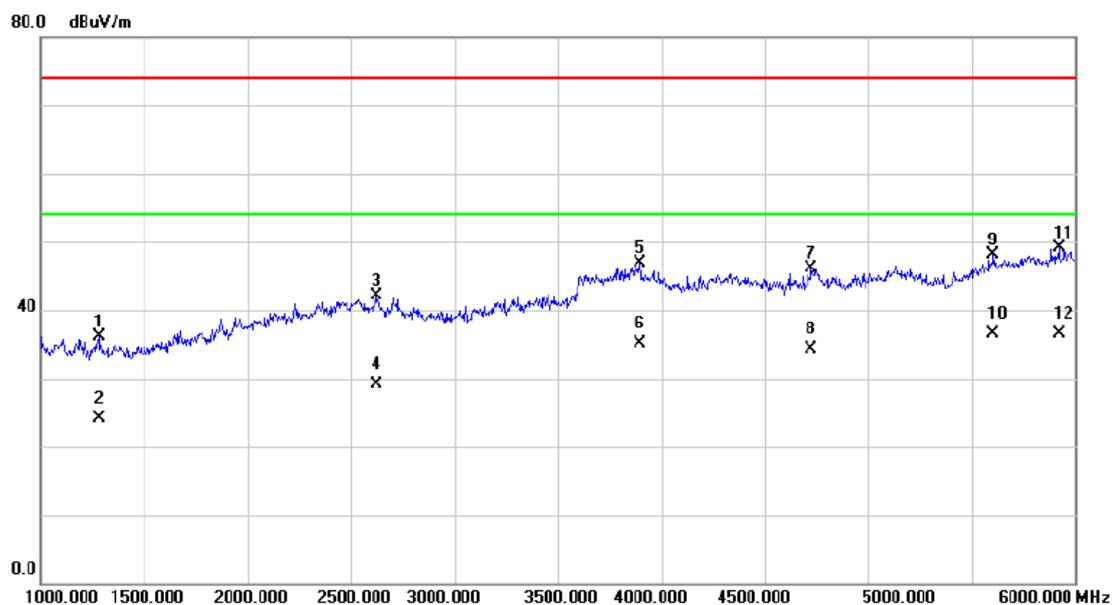

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1280.000	40.73	-4.72	36.01	74.00	-37.99	peak	
2		1280.000	28.74	-4.72	24.02	54.00	-29.98	AVG	
3		2620.000	41.52	0.50	42.02	74.00	-31.98	peak	
4		2620.000	28.65	0.50	29.15	54.00	-24.85	AVG	
5		3895.000	41.11	5.86	46.97	74.00	-27.03	peak	
6		3895.000	29.27	5.86	35.13	54.00	-18.87	AVG	
7		4725.000	38.89	7.24	46.13	74.00	-27.87	peak	
8		4725.000	26.98	7.24	34.22	54.00	-19.78	AVG	
9		5605.000	38.89	9.27	48.16	74.00	-25.84	peak	
10	*	5605.000	27.33	9.27	36.60	54.00	-17.40	AVG	
11		5920.000	39.40	9.66	49.06	74.00	-24.94	peak	
12		5920.000	26.78	9.66	36.44	54.00	-17.56	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+5G wifi+gps+bt
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Vertical

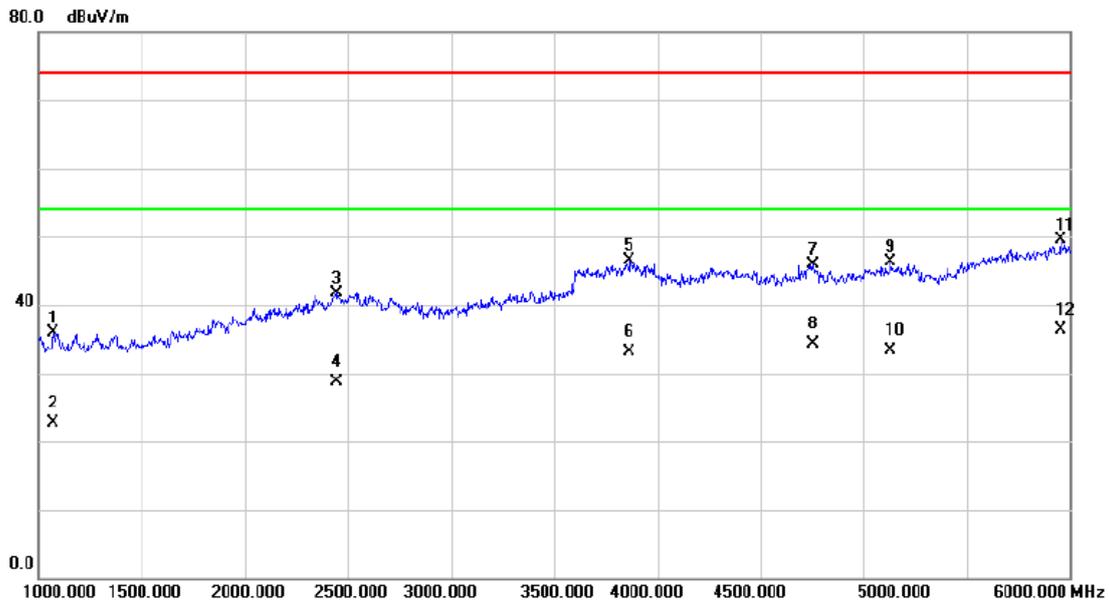

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1070.000	41.23	-5.33	35.90	74.00	-38.10	peak	
2		1070.000	28.05	-5.33	22.72	54.00	-31.28	AVG	
3		2440.000	41.93	-0.16	41.77	74.00	-32.23	peak	
4		2440.000	28.83	-0.16	28.67	54.00	-25.33	AVG	
5		3865.000	40.92	5.64	46.56	74.00	-27.44	peak	
6		3865.000	27.54	5.64	33.18	54.00	-20.82	AVG	
7		4755.000	38.69	7.29	45.98	74.00	-28.02	peak	
8		4755.000	26.96	7.29	34.25	54.00	-19.75	AVG	
9		5130.000	38.21	8.04	46.25	74.00	-27.75	peak	
10		5130.000	25.35	8.04	33.39	54.00	-20.61	AVG	
11		5955.000	39.74	9.70	49.44	74.00	-24.56	peak	
12	*	5955.000	26.61	9.70	36.31	54.00	-17.69	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+5G wifi+gps+bt
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Horizontal

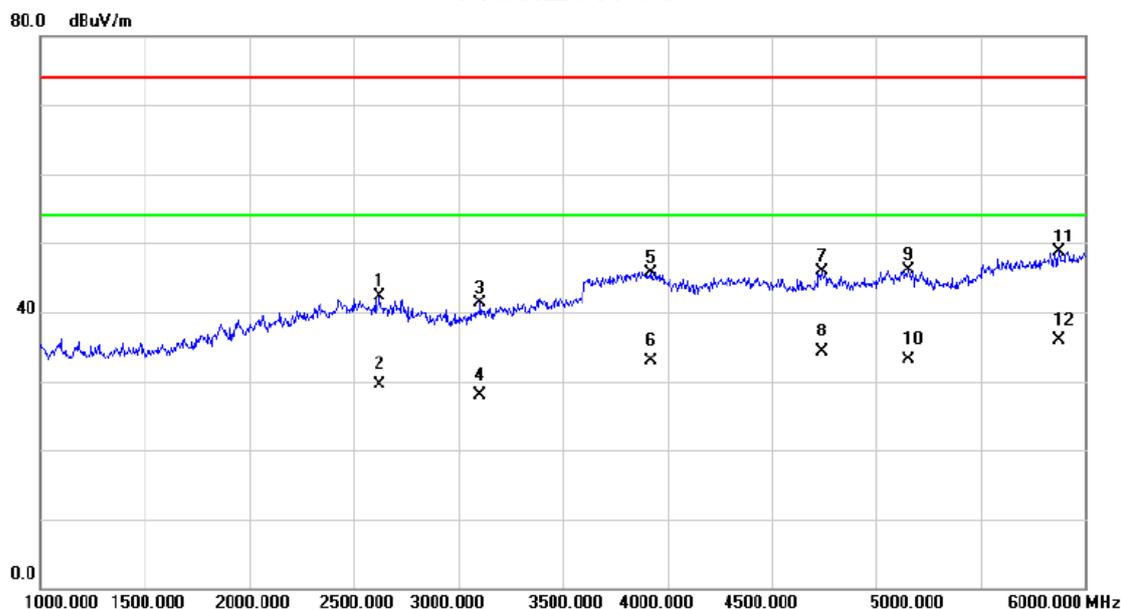

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2625.000	41.85	0.53	42.38	74.00	-31.62	peak	
2		2625.000	29.03	0.53	29.56	54.00	-24.44	AVG	
3		3105.000	39.14	2.08	41.22	74.00	-32.78	peak	
4		3105.000	25.86	2.08	27.94	54.00	-26.06	AVG	
5		3925.000	39.68	6.08	45.76	74.00	-28.24	peak	
6		3925.000	26.92	6.08	33.00	54.00	-21.00	AVG	
7		4740.000	38.74	7.26	46.00	74.00	-28.00	peak	
8		4740.000	26.97	7.26	34.23	54.00	-19.77	AVG	
9		5155.000	37.93	8.11	46.04	74.00	-27.96	peak	
10		5155.000	25.05	8.11	33.16	54.00	-20.84	AVG	
11		5875.000	39.20	9.60	48.80	74.00	-25.20	peak	
12	*	5875.000	26.30	9.60	35.90	54.00	-18.10	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+5G wifi+gps+bt
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Vertical

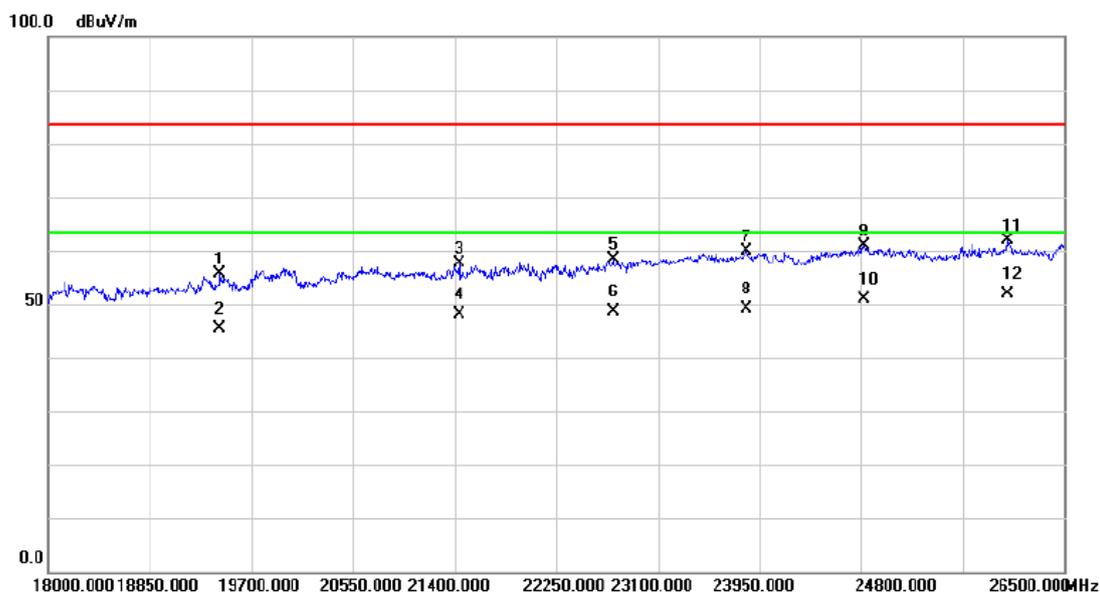

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	19436.50	31.57	24.04	55.61	83.50	-27.89	peak	
2	19436.50	21.35	24.04	45.39	63.50	-18.11	AVG	
3	21434.00	31.12	26.60	57.72	83.50	-25.78	peak	
4	21434.00	21.61	26.60	48.21	63.50	-15.29	AVG	
5	22726.00	31.50	26.79	58.29	83.50	-25.21	peak	
6	22726.00	21.84	26.79	48.63	63.50	-14.87	AVG	
7	23839.50	31.65	28.20	59.85	83.50	-23.65	peak	
8	23839.50	21.00	28.20	49.20	63.50	-14.30	AVG	
9	24825.50	33.87	26.97	60.84	83.50	-22.66	peak	
10	24825.50	24.01	26.97	50.98	63.50	-12.52	AVG	
11	26024.00	33.10	28.89	61.99	83.50	-21.51	peak	
12 *	26024.00	22.98	28.89	51.87	63.50	-11.63	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+5G wifi+gps+bt
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Horizontal

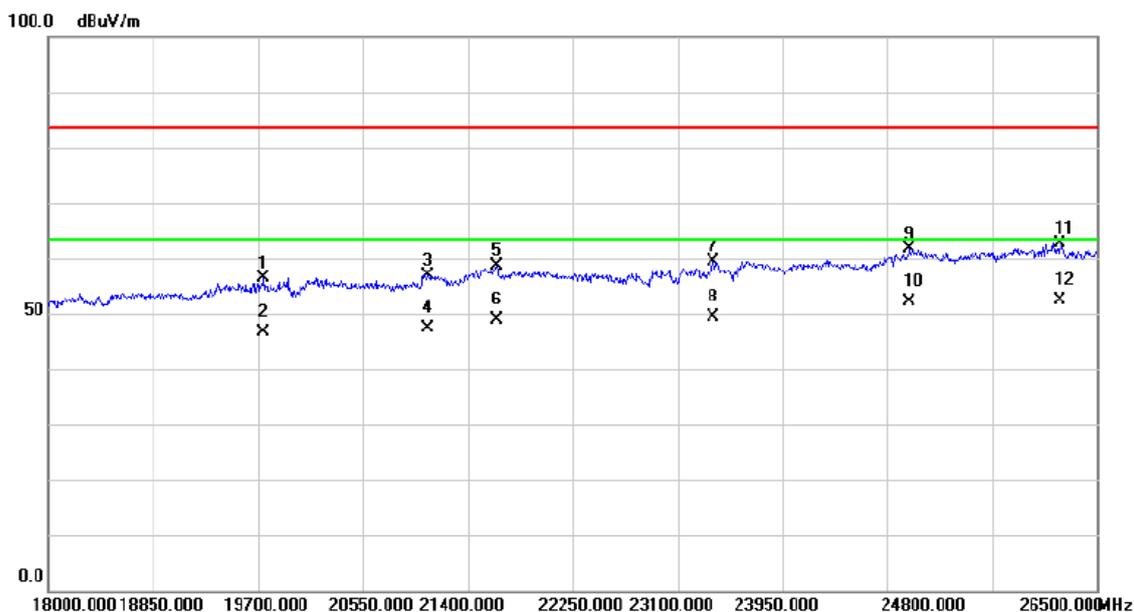

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		19742.50	33.10	23.28	56.38	83.50	-27.12	peak	
2		19742.50	23.40	23.28	46.68	63.50	-16.82	AVG	
3		21077.00	31.12	25.82	56.94	83.50	-26.56	peak	
4		21077.00	21.45	25.82	47.27	63.50	-16.23	AVG	
5		21629.50	32.08	26.50	58.58	83.50	-24.92	peak	
6		21629.50	22.30	26.50	48.80	63.50	-14.70	AVG	
7		23389.00	30.31	29.14	59.45	83.50	-24.05	peak	
8		23389.00	20.15	29.14	49.29	63.50	-14.21	AVG	
9		24978.50	35.04	26.67	61.71	83.50	-21.79	peak	
10		24978.50	25.48	26.67	52.15	63.50	-11.35	AVG	
11		26194.00	34.69	27.98	62.67	83.50	-20.83	peak	
12	*	26194.00	24.39	27.98	52.37	63.50	-11.13	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+5G wifi+gps+bt
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Vertical

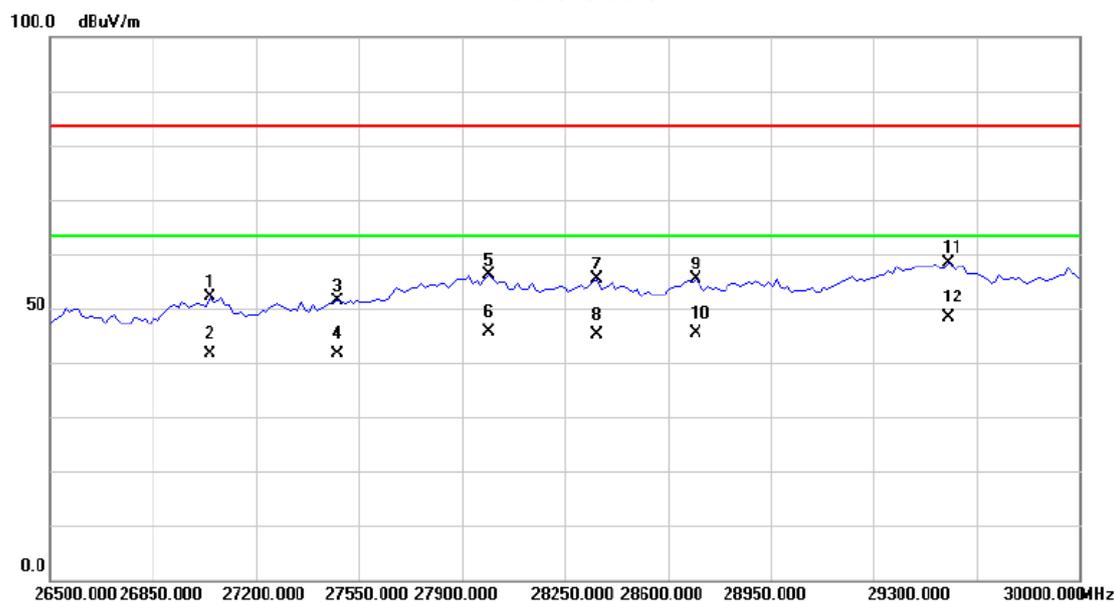

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		27042.63	65.80	-13.66	52.14	83.50	-31.36	peak	
2		27042.63	55.36	-13.66	41.70	63.50	-21.80	AVG	
3		27476.74	65.51	-14.21	51.30	83.50	-32.20	peak	
4		27476.74	55.81	-14.21	41.60	63.50	-21.90	AVG	
5		27992.24	70.83	-14.64	56.19	83.50	-27.31	peak	
6		27992.24	60.34	-14.64	45.70	63.50	-17.80	AVG	
7		28358.52	69.91	-14.46	55.45	83.50	-28.05	peak	
8		28358.52	59.61	-14.46	45.15	63.50	-18.35	AVG	
9		28697.67	69.64	-14.22	55.42	83.50	-28.08	peak	
10		28697.67	59.71	-14.22	45.49	63.50	-18.01	AVG	
11		29552.32	72.32	-14.00	58.32	83.50	-25.18	peak	
12	*	29552.32	62.40	-14.00	48.40	63.50	-15.10	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle+5G wifi+gps+bt
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Horizontal

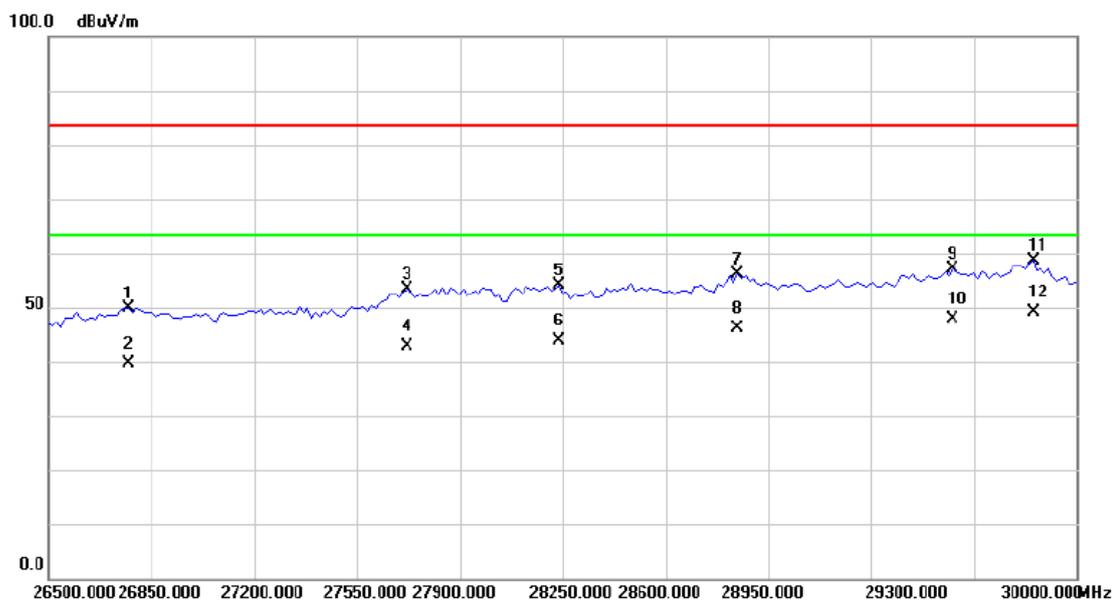

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	26771.31	63.79	-13.88	49.91	83.50	-33.59	peak	
2	26771.31	53.46	-13.88	39.58	63.50	-23.92	AVG	
3	27720.93	67.83	-14.42	53.41	83.50	-30.09	peak	
4	27720.93	57.38	-14.42	42.96	63.50	-20.54	AVG	
5	28236.43	68.74	-14.53	54.21	83.50	-29.29	peak	
6	28236.43	58.47	-14.53	43.94	63.50	-19.56	AVG	
7	28846.89	70.27	-14.09	56.18	83.50	-27.32	peak	
8	28846.89	60.31	-14.09	46.22	63.50	-17.28	AVG	
9	29579.45	71.03	-13.98	57.05	83.50	-26.45	peak	
10	29579.45	61.92	-13.98	47.94	63.50	-15.56	AVG	
11	29850.77	72.27	-13.73	58.54	83.50	-24.96	peak	
12 *	29850.77	62.84	-13.73	49.11	63.50	-14.39	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Vertical

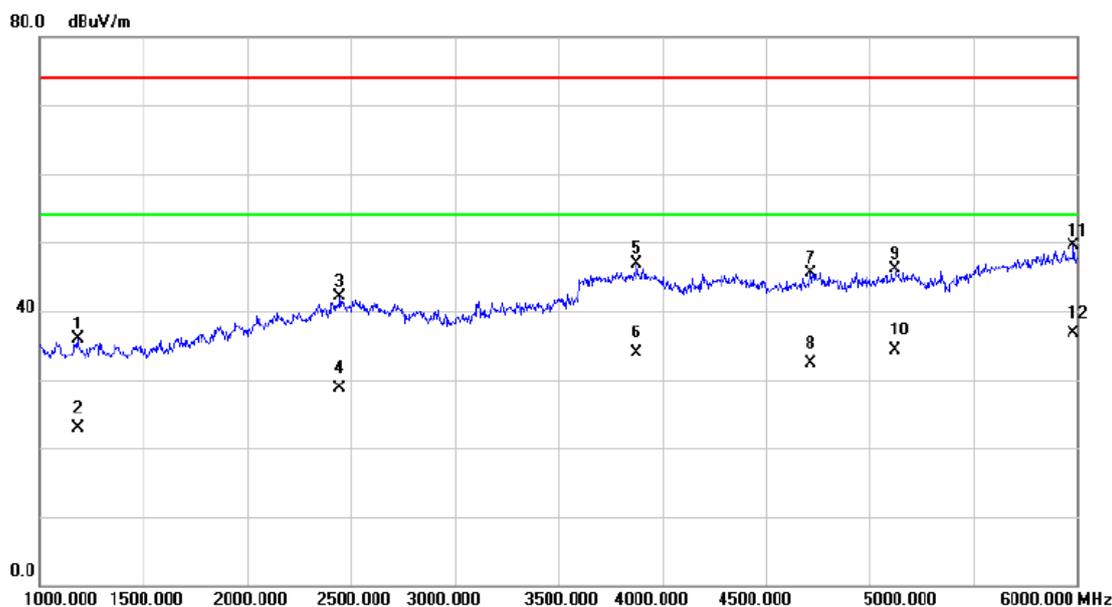

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1180.000	40.86	-5.01	35.85	74.00	-38.15	peak	
2	1180.000	27.87	-5.01	22.86	54.00	-31.14	AVG	
3	2445.000	42.20	-0.14	42.06	74.00	-31.94	peak	
4	2445.000	28.85	-0.14	28.71	54.00	-25.29	AVG	
5	3875.000	41.22	5.72	46.94	74.00	-27.06	peak	
6	3875.000	28.17	5.72	33.89	54.00	-20.11	AVG	
7	4715.000	38.36	7.22	45.58	74.00	-28.42	peak	
8	4715.000	25.12	7.22	32.34	54.00	-21.66	AVG	
9	5125.000	38.17	8.01	46.18	74.00	-27.82	peak	
10	5125.000	26.26	8.01	34.27	54.00	-19.73	AVG	
11	5985.000	39.69	9.73	49.42	74.00	-24.58	peak	
12 *	5985.000	27.04	9.73	36.77	54.00	-17.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Horizontal

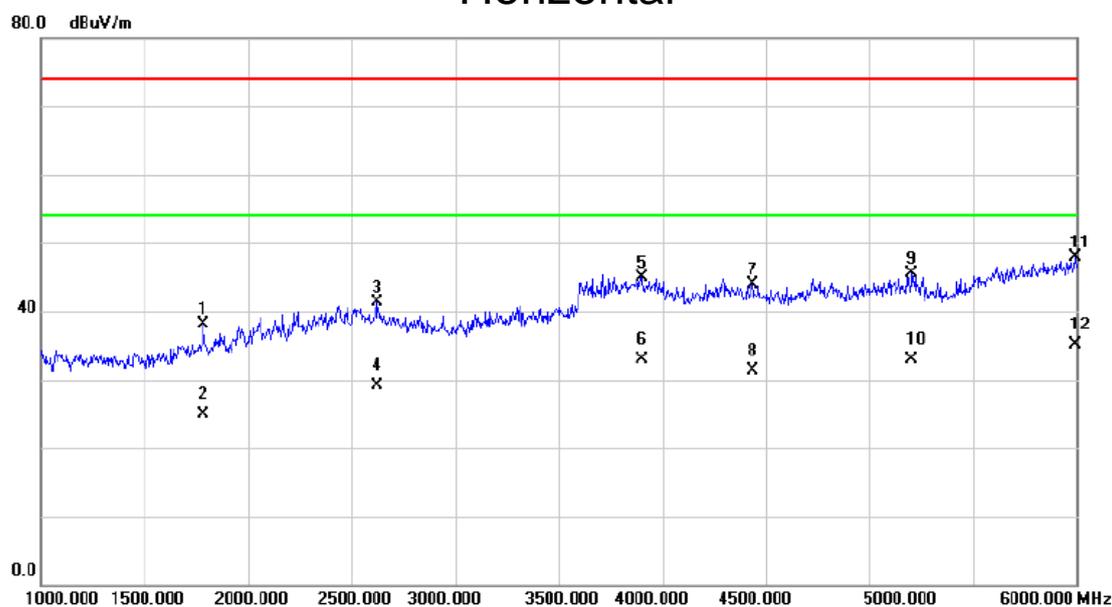

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1785.000	40.98	-2.82	38.16	74.00	-35.84	peak	
2		1785.000	27.78	-2.82	24.96	54.00	-29.04	AVG	
3		2620.000	40.87	0.50	41.37	74.00	-32.63	peak	
4		2620.000	28.66	0.50	29.16	54.00	-24.84	AVG	
5		3900.000	39.02	5.89	44.91	74.00	-29.09	peak	
6		3900.000	27.04	5.89	32.93	54.00	-21.07	AVG	
7		4435.000	37.11	6.88	43.99	74.00	-30.01	peak	
8		4435.000	24.37	6.88	31.25	54.00	-22.75	AVG	
9		5205.000	37.23	8.26	45.49	74.00	-28.51	peak	
10		5205.000	24.69	8.26	32.95	54.00	-21.05	AVG	
11		5995.000	38.12	9.74	47.86	74.00	-26.14	peak	
12	*	5995.000	25.29	9.74	35.03	54.00	-18.97	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Vertical

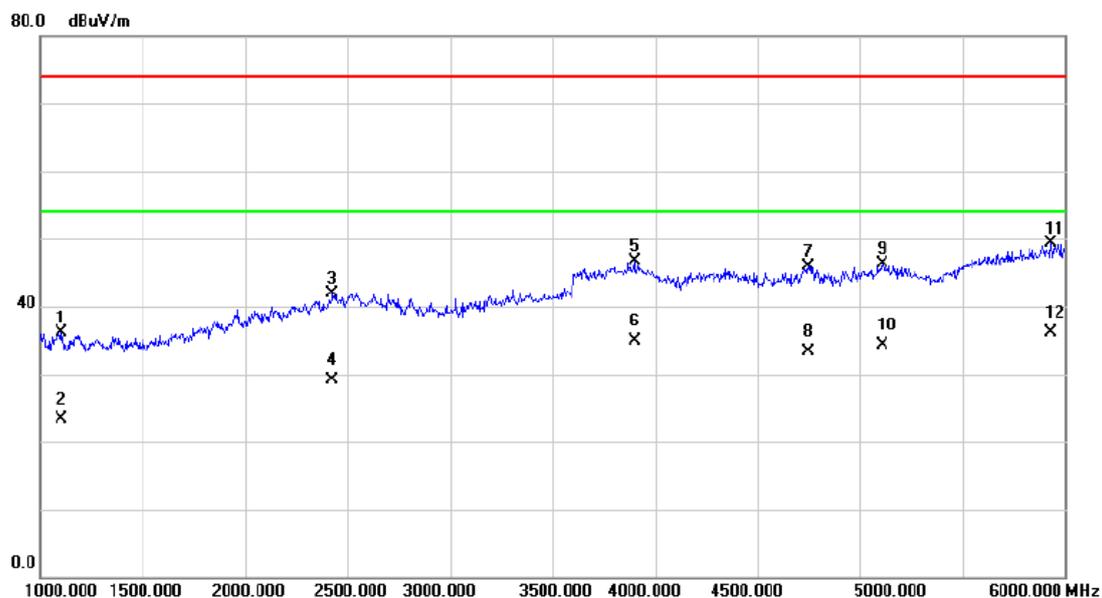

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1100.000	41.30	-5.24	36.06	74.00	-37.94	peak	
2		1100.000	28.57	-5.24	23.33	54.00	-30.67	AVG	
3		2425.000	42.07	-0.21	41.86	74.00	-32.14	peak	
4		2425.000	29.39	-0.21	29.18	54.00	-24.82	AVG	
5		3900.000	40.82	5.89	46.71	74.00	-27.29	peak	
6		3900.000	28.95	5.89	34.84	54.00	-19.16	AVG	
7		4750.000	38.56	7.28	45.84	74.00	-28.16	peak	
8		4750.000	25.97	7.28	33.25	54.00	-20.75	AVG	
9		5110.000	38.30	7.97	46.27	74.00	-27.73	peak	
10		5110.000	26.36	7.97	34.33	54.00	-19.67	AVG	
11		5930.000	39.65	9.66	49.31	74.00	-24.69	peak	
12	*	5930.000	26.52	9.66	36.18	54.00	-17.82	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Horizontal

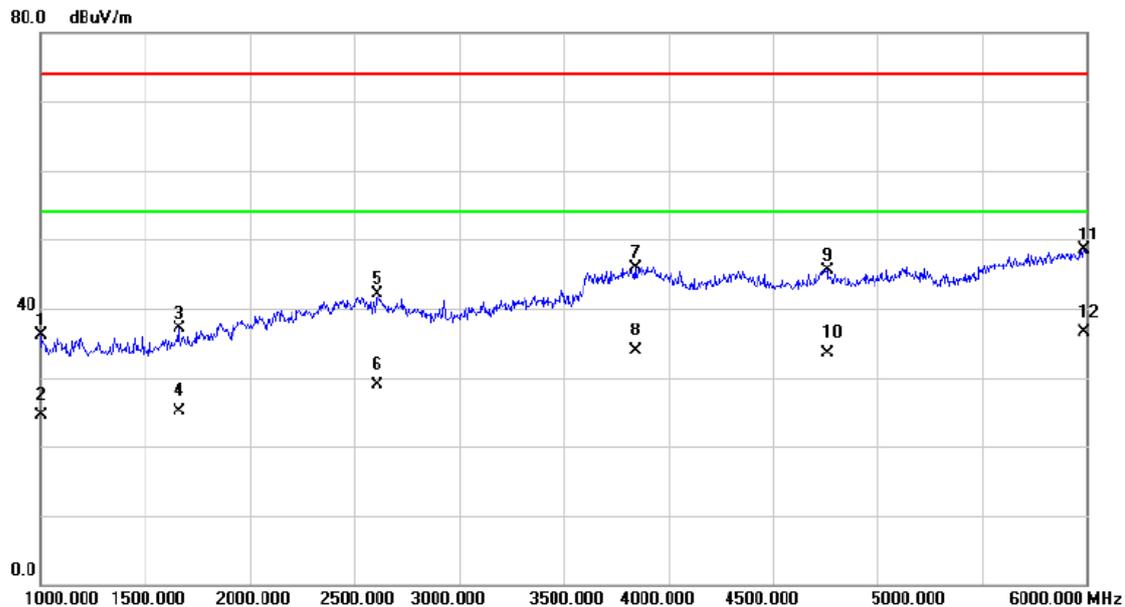

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1000.000	41.72	-5.54	36.18	74.00	-37.82	peak	
2		1000.000	30.06	-5.54	24.52	54.00	-29.48	AVG	
3		1660.000	40.49	-3.36	37.13	74.00	-36.87	peak	
4		1660.000	28.56	-3.36	25.20	54.00	-28.80	AVG	
5		2610.000	41.74	0.46	42.20	74.00	-31.80	peak	
6		2610.000	28.45	0.46	28.91	54.00	-25.09	AVG	
7		3840.000	40.47	5.46	45.93	74.00	-28.07	peak	
8		3840.000	28.35	5.46	33.81	54.00	-20.19	AVG	
9		4760.000	38.21	7.30	45.51	74.00	-28.49	peak	
10		4760.000	26.26	7.30	33.56	54.00	-20.44	AVG	
11		5990.000	38.78	9.74	48.52	74.00	-25.48	peak	
12	*	5990.000	26.74	9.74	36.48	54.00	-17.52	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Vertical

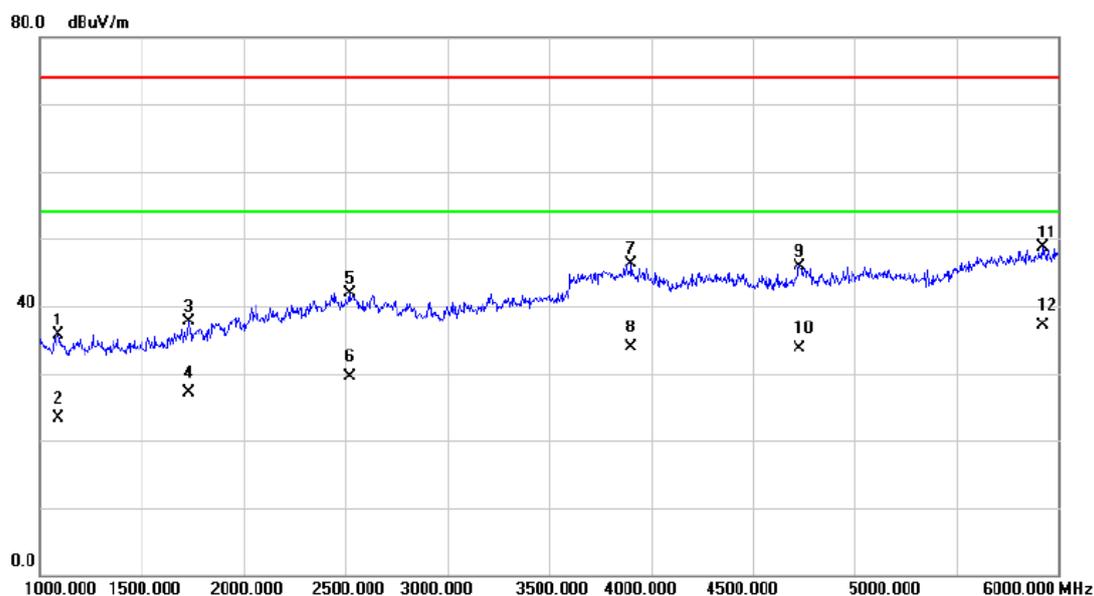

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1090.000	41.03	-5.27	35.76	74.00	-38.24	peak	
2		1090.000	28.60	-5.27	23.33	54.00	-30.67	AVG	
3		1730.000	40.68	-3.06	37.62	74.00	-36.38	peak	
4		1730.000	30.07	-3.06	27.01	54.00	-26.99	AVG	
5		2520.000	41.70	0.14	41.84	74.00	-32.16	peak	
6		2520.000	29.40	0.14	29.54	54.00	-24.46	AVG	
7		3905.000	40.33	5.93	46.26	74.00	-27.74	peak	
8		3905.000	28.02	5.93	33.95	54.00	-20.05	AVG	
9		4730.000	38.63	7.25	45.88	74.00	-28.12	peak	
10		4730.000	26.42	7.25	33.67	54.00	-20.33	AVG	
11		5920.000	38.97	9.66	48.63	74.00	-25.37	peak	
12	*	5920.000	27.51	9.66	37.17	54.00	-16.83	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Horizontal

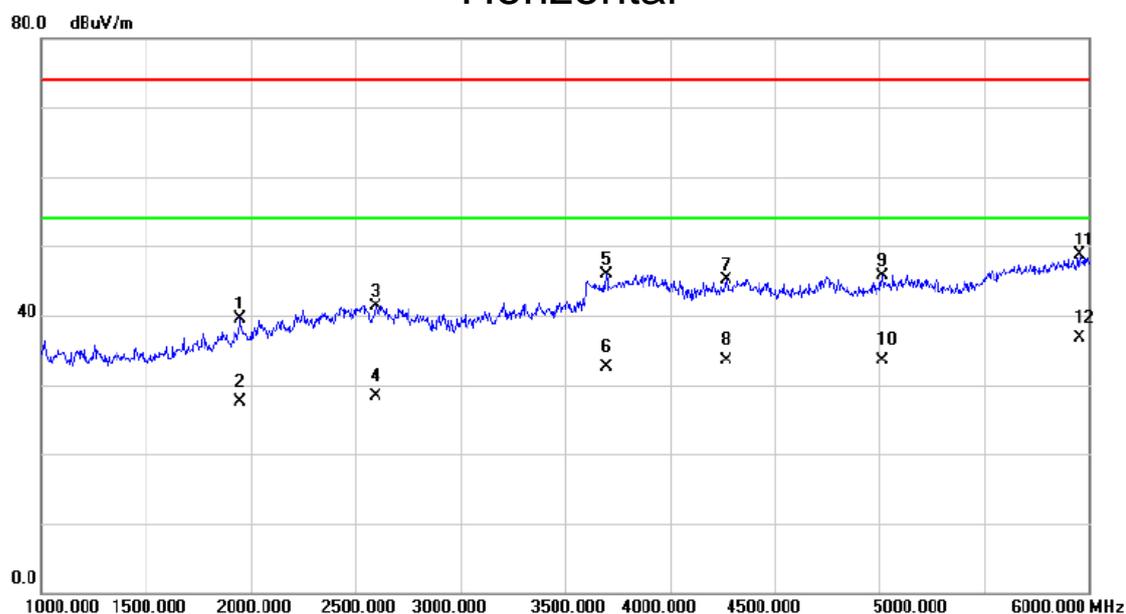

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1950.000	41.51	-2.10	39.41	74.00	-34.59	peak	
2		1950.000	29.69	-2.10	27.59	54.00	-26.41	AVG	
3		2595.000	40.90	0.42	41.32	74.00	-32.68	peak	
4		2595.000	27.82	0.42	28.24	54.00	-25.76	AVG	
5		3695.000	41.42	4.41	45.83	74.00	-28.17	peak	
6		3695.000	28.02	4.41	32.43	54.00	-21.57	AVG	
7		4270.000	38.37	6.78	45.15	74.00	-28.85	peak	
8		4270.000	26.72	6.78	33.50	54.00	-20.50	AVG	
9		5015.000	38.08	7.69	45.77	74.00	-28.23	peak	
10		5015.000	25.73	7.69	33.42	54.00	-20.58	AVG	
11		5955.000	38.98	9.70	48.68	74.00	-25.32	peak	
12	*	5955.000	26.92	9.70	36.62	54.00	-17.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Vertical

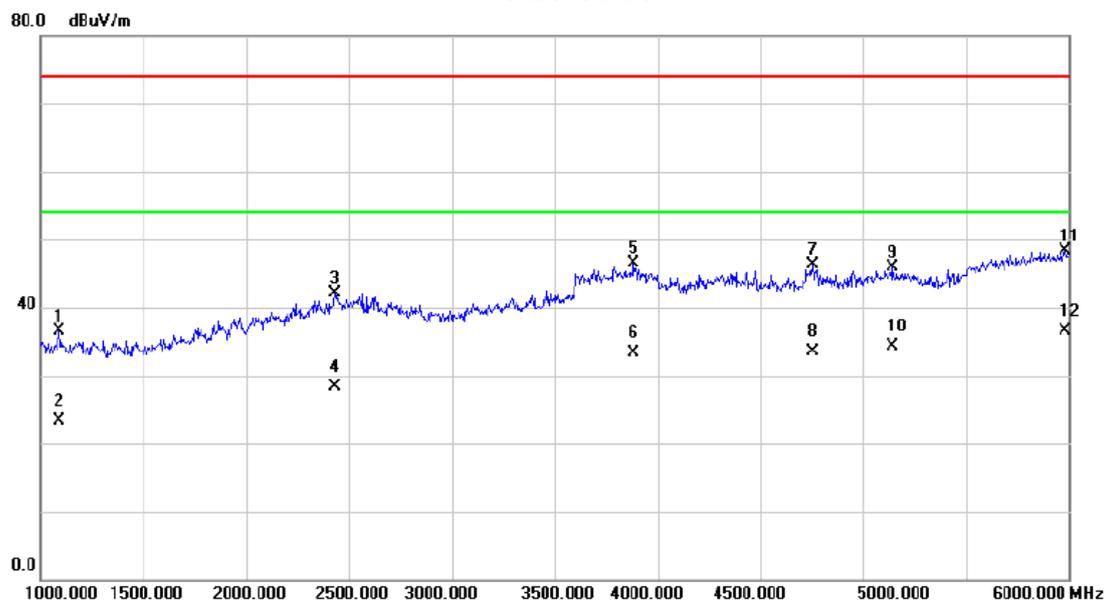

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1090.000	41.81	-5.27	36.54	74.00	-37.46	peak	
2		1090.000	28.62	-5.27	23.35	54.00	-30.65	AVG	
3		2430.000	42.38	-0.20	42.18	74.00	-31.82	peak	
4		2430.000	28.41	-0.20	28.21	54.00	-25.79	AVG	
5		3885.000	40.74	5.78	46.52	74.00	-27.48	peak	
6		3885.000	27.47	5.78	33.25	54.00	-20.75	AVG	
7		4755.000	39.10	7.29	46.39	74.00	-27.61	peak	
8		4755.000	26.16	7.29	33.45	54.00	-20.55	AVG	
9		5145.000	37.74	8.07	45.81	74.00	-28.19	peak	
10		5145.000	26.25	8.07	34.32	54.00	-19.68	AVG	
11		5985.000	38.55	9.73	48.28	74.00	-25.72	peak	
12	*	5985.000	26.72	9.73	36.45	54.00	-17.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD +USB Cable: Pang Ngai +Earphone: GoerTek Inc H


## Horizontal

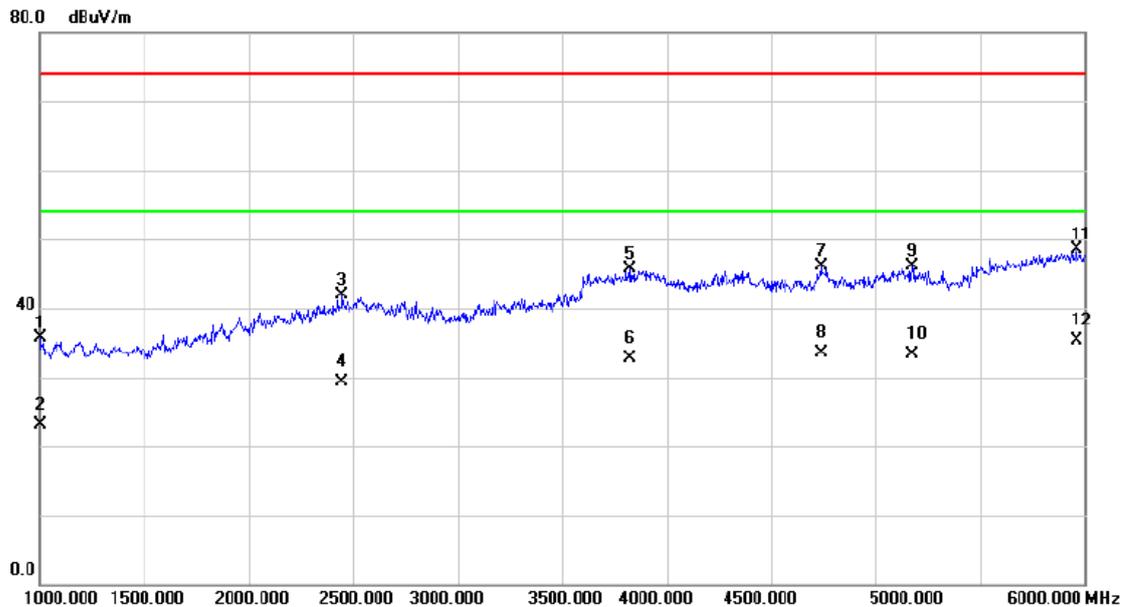

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1000.000	41.20	-5.54	35.66	74.00	-38.34	peak	
2		1000.000	28.74	-5.54	23.20	54.00	-30.80	AVG	
3		2445.000	42.01	-0.14	41.87	74.00	-32.13	peak	
4		2445.000	29.45	-0.14	29.31	54.00	-24.69	AVG	
5		3825.000	40.36	5.35	45.71	74.00	-28.29	peak	
6		3825.000	27.38	5.35	32.73	54.00	-21.27	AVG	
7		4740.000	38.76	7.26	46.02	74.00	-27.98	peak	
8		4740.000	26.32	7.26	33.58	54.00	-20.42	AVG	
9		5175.000	37.96	8.17	46.13	74.00	-27.87	peak	
10		5175.000	25.07	8.17	33.24	54.00	-20.76	AVG	
11		5960.000	38.72	9.70	48.42	74.00	-25.58	peak	
12	*	5960.000	25.59	9.70	35.29	54.00	-18.71	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle
Note:	USB Cable: Pang Ngai +Earphone: GoerTek Inc


## Vertical

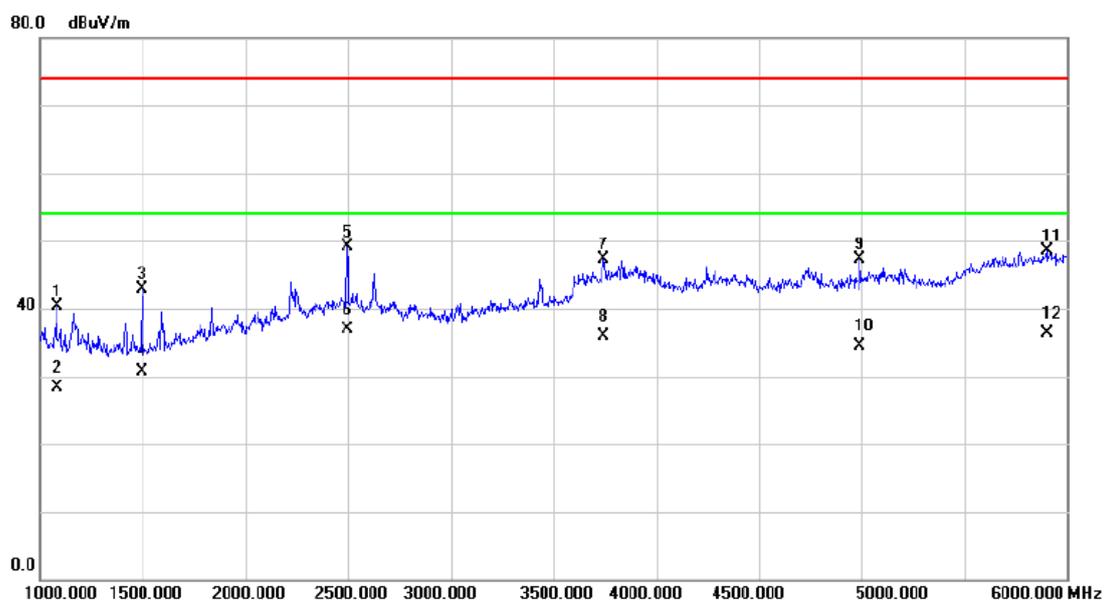

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1080.000	45.55	-5.30	40.25	74.00	-33.75	peak	
2		1080.000	33.62	-5.30	28.32	54.00	-25.68	AVG	
3		1495.000	46.98	-4.08	42.90	74.00	-31.10	peak	
4		1495.000	34.85	-4.08	30.77	54.00	-23.23	AVG	
5		2495.000	49.00	0.05	49.05	74.00	-24.95	peak	
6	*	2495.000	36.84	0.05	36.89	54.00	-17.11	AVG	
7		3740.000	42.56	4.74	47.30	74.00	-26.70	peak	
8		3740.000	31.12	4.74	35.86	54.00	-18.14	AVG	
9		4990.000	39.75	7.62	47.37	74.00	-26.63	peak	
10		4990.000	26.93	7.62	34.55	54.00	-19.45	AVG	
11		5900.000	38.97	9.63	48.60	74.00	-25.40	peak	
12		5900.000	26.72	9.63	36.35	54.00	-17.65	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle
Note:	USB Cable: Pang Ngai +Earphone: GoerTek Inc

## Horizontal

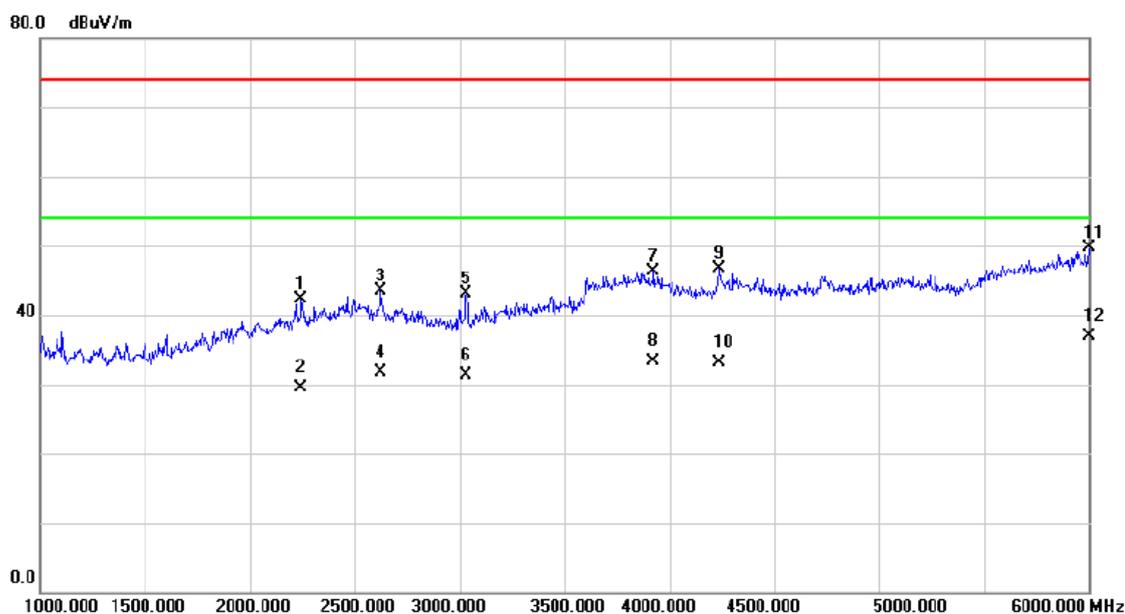

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2245.000	43.27	-0.92	42.35	74.00	-31.65	peak	
2	2245.000	30.40	-0.92	29.48	54.00	-24.52	AVG	
3	2625.000	43.07	0.53	43.60	74.00	-30.40	peak	
4	2625.000	31.24	0.53	31.77	54.00	-22.23	AVG	
5	3030.000	41.20	1.91	43.11	74.00	-30.89	peak	
6	3030.000	29.45	1.91	31.36	54.00	-22.64	AVG	
7	3925.000	40.32	6.08	46.40	74.00	-27.60	peak	
8	3925.000	27.22	6.08	33.30	54.00	-20.70	AVG	
9	4235.000	39.93	6.76	46.69	74.00	-27.31	peak	
10	4235.000	26.41	6.76	33.17	54.00	-20.83	AVG	
11	6000.000	39.91	9.75	49.66	74.00	-24.34	peak	
12 *	6000.000	27.10	9.75	36.85	54.00	-17.15	AVG	