



FCC RF Test Report

Product Name:
LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile
Phone with Bluetooth

Model Number: HUAWEI U9202L-3, U9202L-3

Report No: SYBH(Z-RF) 016082012-2004
FCC ID: QISU9202L-3

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C
Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Applicant: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Receipt Test Item: Aug.06, 2012
Start Date of Test: Aug.09, 2012
End Date of Test: Aug.29, 2012

Test Result: Pass

Approved By Senior Engineer Sept., 19, 2012 Dai Linjun
 Date Name Signature

Reviewed By Sept., 19, 2012 Cousy Xu
 Date Name Signature

Operated By Sept., 19, 2012 Huang Qiuliang
 Date Name Signature

Contents

1	<u>General Information</u>	5
1.1	APPLIED STANDARD.....	5
1.2	TEST LOCATION.....	5
1.3	TEST ENVIRONMENTAL CONDITION.....	5
2	<u>Summary</u>	6
3	<u>Product Description</u>	7
3.1	PRODUCT INFORMATION	7
4	<u>Test Description</u>	8
4.1	SUPPORTED FREQUENCY RANGE	8
4.2	TRANSMITTER / RECEIVER CHARACTERISTICS.....	8
4.3	ANTENNA GAIN.....	8
5	<u>General Test Conditions / Configurations</u>	9
5.1	RF CHANNELS UNDER TEST.....	9
5.2	TEST MODES.....	9
5.3	TEST ENVIRONMENT	9
5.4	TEST SETUP.....	10
5.5	TEST CONDITIONS	14
6	<u>Main Test Instruments</u>	15
7	<u>Test Results</u>	16
8	<u>Measurement Uncertainty</u>	16

1 General Information

1.1 Applied Standard	
Applied Rules:	47 CFR FCC Part 2:2011, Subpart J 47 CFR FCC Part 27:2011, Subpart C&M ANSI/TIA 603C:2004
1.2 Test Location	
Test Location 1:	Reliability Laboratory of Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
1.3 Test Environmental Condition	
Ambient Temperature:	20 – 25 °C
Ambient Relative Humidity:	45 – 55 %
Atmospheric Pressure:	101 kPa

2 Summary

Table 1 Summary of Band 17 results

Test Case	FCC Part No.	Requirements	Result
698-746MHz Band (LTE Band 17)			
Transmitter Output Power	2.1046 & 27.50(c)	Peak ERP not exceed 3 W	Pass
Modulation Characteristics	2.1047	Digital modulation	Pass
Occupied Bandwidth	2.1049	(Not specified)	Pass
Band Edges Compliance	2.1051 & 27.53(g)	Below -13 dBm/1%*EBW, in 1 MHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 27.53(g)	Below -33 dBm/1 kHz, 9 kHz to 150 kHz Below -23 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz, 30 MHz to 10 th harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 27.53(g)	Below -13 dBm/100 kHz	Pass
Frequency Stability	2.1055 & 27.54	Stay within the authorized bands of operation	Pass

3 Product Description

3.1 Product Information

3.1.1 General Description

HUAWEI U9202L-3, U9202L-3 is subscriber equipment in the LTE/UMTS/GSM system. The LTE frequency band is Band IV and Band XVII. The HSPA+/HSUPA/HSDPA/UMTS frequency band is Band I, Band II, Band IV and Band V. Only Band XVII can be used in this report. The GSM/GPRS/EDGE frequency band includes GSM850 and DCS1800 and PCS1900. The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/UMTS/GSM protocol processing, voice, video, MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

3.1.2 Board Information

Table 2 Board Information

LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth		
HUAWEI U9202L-3, U9202L-3		
Board and Module		
Hardware Version	Hardware Version	Description
Ver.B	U9202L-3V100R001C00B116	Main board of Mobile Phone

3.1.3 Adapter Technical Data

AC/DCAdapter Model	HW-050100U3W
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

3.1.4 Battery Technical Data

Name	Manufacture	Description
Rechargeable Li-ion	Huawei Technologies Co., Ltd.	Battery Model: HB5R1H Rated capacity: 1930mAh



		Nominal Voltage: +3.7V Charging Voltage: +4.2V
--	--	---

4 Test Description

4.1 Supported Frequency Range

Characteristics	Description
Downlink	734 to 746 MHz
Uplink	704 to 716 MHz

4.2 Transmitter / Receiver Characteristics

Characteristics	Description
System Type	LTE
TX Output Power (per Antenna Port)	LTE system: 22.5dBm
Channel Spacing(s) / Bandwidth(s)	LTE system: 5 MHz, 10 MHz
Designation of Emissions	LTE system: 4M49G7D (5 MHz ,QPSK modulation), 4M49W7D (5 MHz ,16QAM modulation), 8M87G7D (10 MHz QPSK modulation), 8M92W7D (10 MHz 16QAM modulation),

4.3 Antenna Gain

Antenna Gain(dBi)	-0.8
Antenna Gain(dBd)	-2.95

5 General Test Conditions / Configurations

5.1 RF Channels under Test

Test Mode	TX / RX	RF Channel		
		Bottom (B)	Middle (M)	Top (T)
LTE Band 17	TX (5M)	Channel 23755	Channel 23790	Channel 23780
		706.5 MHz	710 MHz	709 MHz
	RX (5M)	Channel 5755	Channel 5790	Channel 5780
		736.5 MHz	740 MHz	739 MHz
	TX (10M)	Channel 23825	Channel 23790	Channel 23800
		713.5 MHz	710 MHz	711 MHz
	RX (10M)	Channel 5825	Channel 5790	Channel 5800
		743.5 MHz	740 MHz	741 MHz

5.2 Test Modes

Test Mode	Test Modes Description
TM1	LTE QPSK modulation
TM2	LTE 16QAM modulation

5.3 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.5V
	VN	3.7V
	VH	4.2V

NOTE: VL= lower extreme test voltage

VN= nominal voltage

VH= upper extreme test voltage


TN= normal temperature

5.4 Test Setup

5.4.1 General Test Setup Configurations

Configuration	Description
Test Antenna Ports	Until otherwise declared, all TX tests are ONLY performed at the main Transmitter antenna port (e.g. TRXA, TXA and so on) of the EUT, and all RX tests are ONLY performed at the main Receiver antenna port (e.g. TRXA, RXA and so on) of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.


5.4.2 Test Setup 1

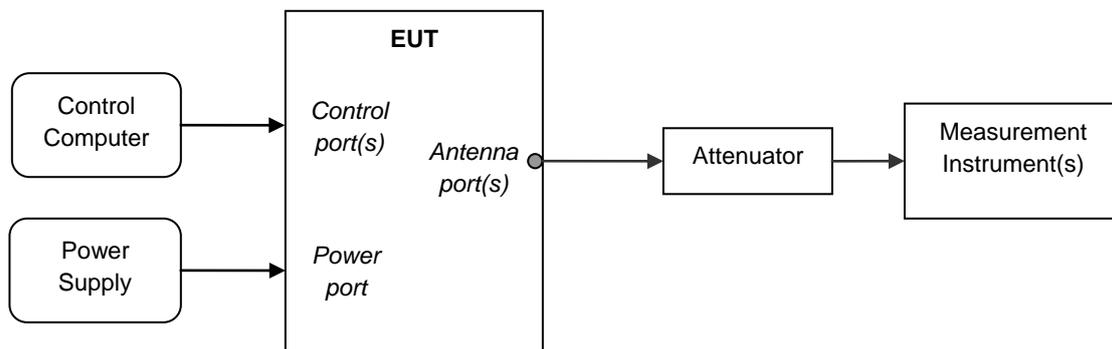

Note

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA and LTE signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

5.4.3 Test Setup 2

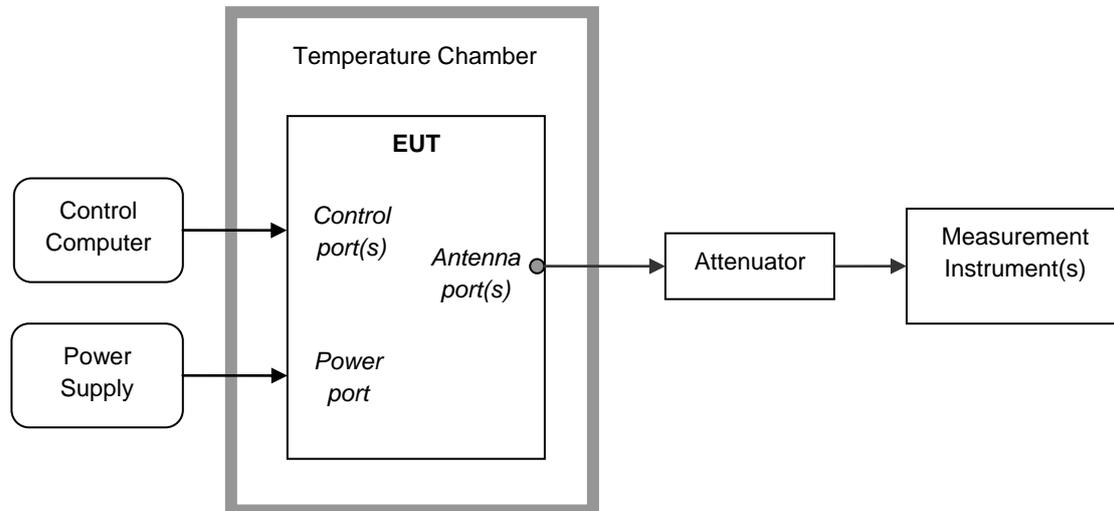

5.4.4 Test Setup 3

NOTE1: Effective radiated power (ERP) or Effective Isotropic radiated power (EIRP) refers to the EUT radiation power output, assuming all emissions are radiated from half-wave dipole antennas or horn antennas.

NOTE2: The EUT was set on insulator 80cm above the Ground Plane. The setup and test methods were according to ANSI-TIA-603C 2004. The measurements were carried through with a Rohde and Schwarz Test Receiver and control software.


Step 1: Pre-test to find the Maximum ERP or EIRP

1. Connect the test system according to the following figure. EUT is running for 30 minutes before test, and measurement instruments are warming-up for 30 minutes.
2. Set up communication link between Universal radio communication tester and EUT, set EUT working frequency, and control EUT to transmit at maximum power.
3. Set the center frequency of the signal analyzer or receiver to the EUT's operating frequency, the RBW is equal to the emission bandwidth of the signal. Set RMS detector for the test, and the span is

equal to 2 times of emission bandwidth, the other settings should remain automatic. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0°to 360°. The receiver antenna has two polarizations V and H. A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other non-metallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized. Measure the EUT maximum RF power and record the result.


4. Changing EUT working frequency and measuring the RF power at channel L, M, H respectively.

Complete the test data.

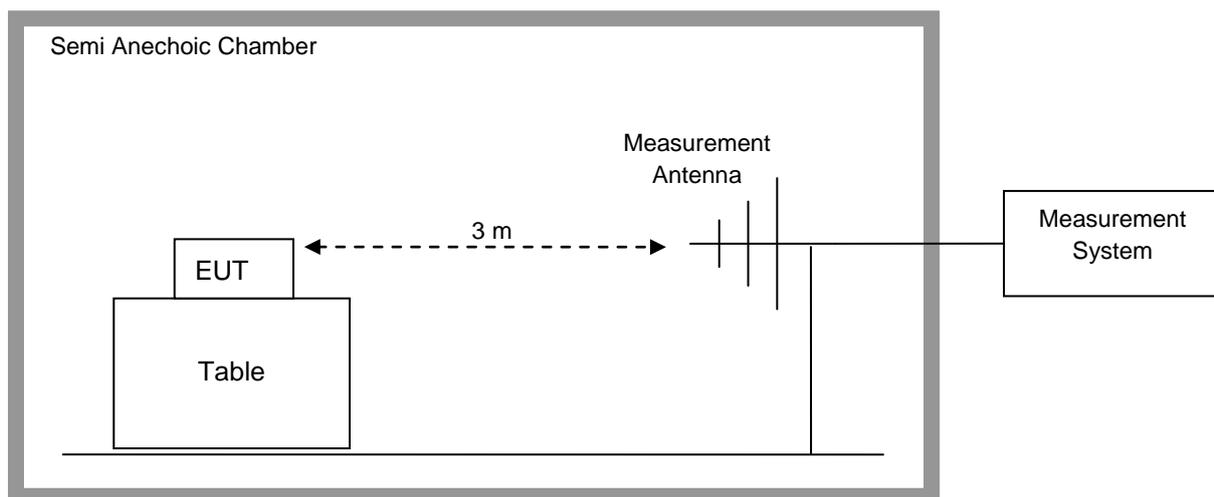

Step 2: Substitution method to verify the maximum ERP or EIRP

1. Measurement setup is according to the following figure. EUT was substituted by antenna, and the polarization is identical with the test antenna; the signal generator was connected to the substitution antenna.
2. The radiated output power, measured by signal analyzer set, is the same as recorded in above. Then this power level is matched by a signal from a calibrated signal generator which is substituted for EUT. The power supplied by the generator is then equal to the ERP or EIRP after corrected by the antenna gain and cable loss.

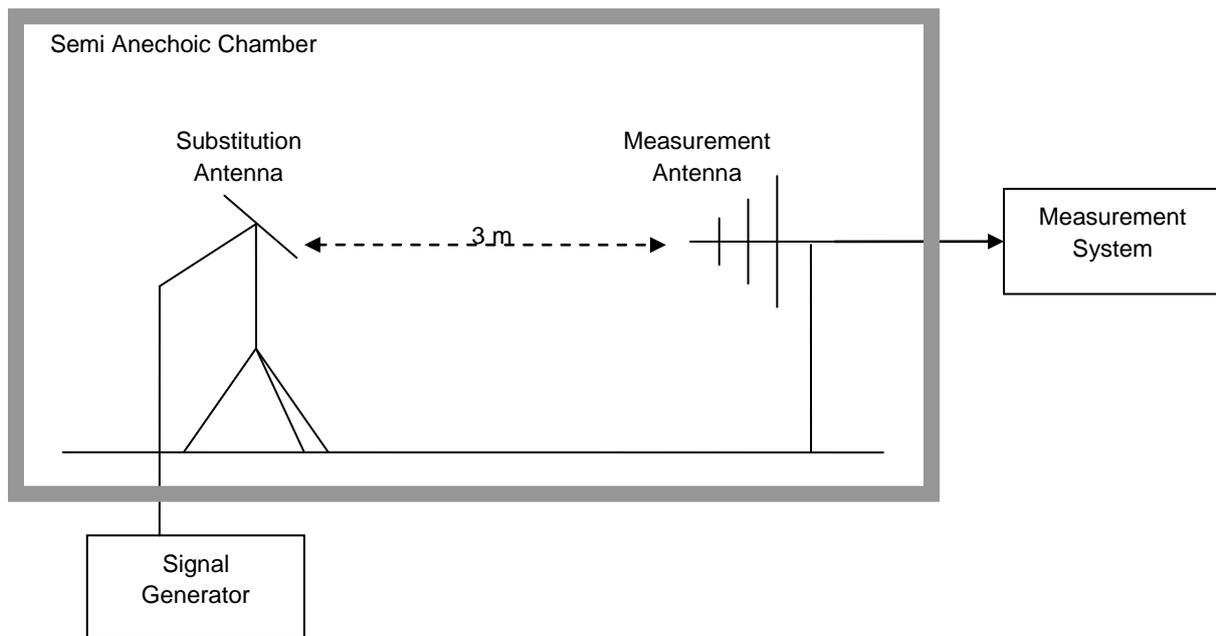

5.5 Test Conditions

Test Case	Test Conditions	
Transmitter Output Power	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1 & Test Setup 3
	Detector	RMS
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Modulation Characteristics	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	RF Channels (TX)	M
	Test Mode	TM1/TM2
Occupied Bandwidth	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Band Edges Compliance	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	B, T
	Test Mode	TM1/TM2
Spurious Emission at Antenna Terminals	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	B, M, T
	Test Mode	TM1
Field Strength of Spurious Radiation	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	PK
	RF Channels (TX)	M
	Test Mode	TM1
Frequency Stability	Test Configuration	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) VL, VH and VN Voltage at Ambient Temperature.
	Test Setup	Test Setup 2
	RF Channels (TX)	M
	Test Mode	TM1

6 Main Test Instruments

Table 3 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sept., 27,2012
Universal Radio Communication Tester	R&S	CMU200	117341	Jan., 12,2013
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug., 30,2013
Spectrum Analyzer	Agilent	E4440A	MY49420179	Jul., 17,2013
Signal Analyzer	Agilent	N9020A	MY52090652	Jul., 17,2013
Signal Analyzer	R&S	FSQ31	200021	Sept., 27,2012
Temperature Chamber	WEISS	WKL64	24600294	Feb.,13,2013
Signal generator	Agilent	E8257D	MY49281095	Jul.,09,2013
Spectrum analyzer	R&S	FSU3	200474	Mar., 05, 2013
Spectrum analyzer	R&S	FSU43	100144	Mar., 05, 2013
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	Apr., 05, 2013
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100391	Apr., 05, 2013
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-521	Jul., 07, 2013
Pyramidal Horn Antenna(26GHz-40GHz)	ETS-Lindgren	3160-10	00123940	Feb., 27, 2013
Pyramidal Horn Antenna(18GHz-26.5GHz)	ETS-Lindgren	3160-09	00125912	Feb., 27, 2013
Universal Radio Communication Tester	R & S	CMW500	20347676	Sept., 06, 2013
Universal Radio Communication Tester	Anritsu	MT8820C	6200971028	May, 04, 2013

Note: All the equipments are calibrated once a year. When it's almost due, we will arrange calibration again before the calibration deadline.

7 Test Results

No.	Test Item	Test Result
1	Transmitter Output Power	Appendix A
2	Modulation Characteristics	Appendix B
3	Occupied Bandwidth	Appendix C
4	Band Edges Compliance	Appendix D
5	Spurious Emission at Antenna Terminals	Appendix E
6	Field Strength of Spurious Radiation	Appendix F
7	Frequency Stability	Appendix G
8	Photos of Test Setup	Appendix H

NOTE: There is no test data in Appendix H, only Photos of Test Setup for Field Strength of Spurious Radiation.

8 Measurement Uncertainty

For a 95% confidence level ($k=2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmitter Output Power	Power (dBm)	U =0.39 dB
Occupied Bandwidth	Magnitude (%)	U=0.2%
Band Edge Compliance	Disturbance Power (dBm)	U=2.0 dB
Conducted Spurious Emissions	Disturbance Power (dBm)	U=2.0 dB
Field Strength of Spurious Radiation	ERP (dBm)	U=4.6 dB (30 MHz – 1GHz) U=3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy (ppm)	U=0.21 ppm

-----The END-----



Appendix A

Transmitter Output Power

According to FCC Part 2.1046 & FCC Part 27.50(c)



Conducted Power of Transmitter

Table 1 Measurement Results (LTE) BAND 17

RF Output Power(Conducted) BAND 17				
Test Mode	TN/VN			
	Modulation	RB	Measured (dBm)	Limit (dBm)
Channel (B) 5MHz(BW)	QPSK	1RB#0	22.14	34.8
		1RB#max	22.67	34.8
		12RB#6	21.07	34.8
		Full	21.11	34.8
	16QAM	1RB#0	21.18	34.8
		1RB#max	21.71	34.8
		12RB#6	20.12	34.8
		Full	20.09	34.8
Channel (B) 10MHz(BW)	QPSK	1RB#0	22.08	34.8
		1RB#max	22.05	34.8
		25RB#13	21.31	34.8
		Full	21.06	34.8
	16QAM	1RB#0	21.49	34.8
		1RB#max	21.71	34.8
		25RB#13	20.31	34.8
		Full	20.06	34.8
Channel (M) 5MHz(BW)	QPSK	1RB#0	22.44	34.8
		1RB#max	22.42	34.8
		12RB#6	21.45	34.8
		Full	21.27	34.8
	16QAM	1RB#0	21.47	34.8
		1RB#max	21.52	34.8
		12RB#6	20.58	34.8
		Full	20.34	34.8
Channel (M) 10MHz(BW)	QPSK	1RB#0	22.09	34.8
		1RB#max	22.02	34.8
		25RB#13	21.29	34.8
		Full	21.12	34.8
	16QAM	1RB#0	21.19	34.8
		1RB#max	21.09	34.8
		25RB#13	20.01	34.8



		Full	20.04	34.8
Channel (T) 5MHz(BW)	QPSK	1RB#0	22.64	34.8
		1RB#max	21.02	34.8
		12RB#6	21.24	34.8
		Full	20.94	34.8
	16QAM	1RB#0	21.77	34.8
		1RB#max	20.12	34.8
		12RB#6	20.34	34.8
		Full	20.07	34.8
Channel (T) 10MHz(BW)	QPSK	1RB#0	22.41	34.8
		1RB#max	21.71	34.8
		25RB#13	21.57	34.8
		Full	21.44	34.8
	16QAM	1RB#0	21.53	34.8
		1RB#max	20.79	34.8
		25RB#13	20.65	34.8
		Full	20.37	34.8

Note: RBW > emission bandwidth, VBW > 3 x RBW.



Peak-to-Average Ratio

Table 2 Measurement Results (LTE) BAND 17

Peak-to-Average Ratio				
Test Mode	TN/VN			
	Modulation	RB	Measured (dB)	Limit (dB)
Channel (B) 5MHz(BW)	QPSK	1RB#0	5.32	13
		1RB#max	5.25	13
		12RB#6	5.16	13
		Full	5.35	13
	16QAM	1RB#0	6.05	13
		1RB#max	6.08	13
		12RB#6	6.13	13
		Full	6.28	13
Channel (B) 10MHz(BW)	QPSK	1RB#0	5.22	13
		1RB#max	5.26	13
		25RB#13	5.32	13
		Full	5.18	13
	16QAM	1RB#0	6.25	13
		1RB#max	6.38	13
		25RB#13	6.14	13
		Full	6.18	13
Channel (M) 5MHz(BW)	QPSK	1RB#0	5.35	13
		1RB#max	5.27	13
		12RB#6	5.16	13
		Full	5.31	13
	16QAM	1RB#0	6.07	13
		1RB#max	6.06	13
		12RB#6	6.17	13
		Full	6.28	13
Channel (M) 10MHz(BW)	QPSK	1RB#0	5.23	13
		1RB#max	5.27	13
		25RB#13	5.39	13
		Full	5.11	13
	16QAM	1RB#0	6.25	13
		1RB#max	6.37	13



		25RB#13	6.16	13
		Full	6.19	13
Channel (T) 5MHz(BW)	QPSK	1RB#0	5.32	13
		1RB#max	5.34	13
		12RB#6	5.37	13
		Full	5.23	13
	16QAM	1RB#0	6.24	13
		1RB#max	6.38	13
		12RB#6	6.11	13
		Full	6.16	13
Channel (T) 10MHz(BW)	QPSK	1RB#0	5.28	13
		1RB#max	5.27	13
		25RB#13	5.34	13
		Full	5.13	13
	16QAM	1RB#0	6.27	13
		1RB#max	6.33	13
		25RB#13	6.11	13
		Full	6.13	13



Effective Radiated Power of Transmitter (ERP)

Table 3 Substitution Results (LTE) BAND 17

Test Mode			Meas. Level [dBm]	Substitution Antenna Type	SGP[dBm]	Substitution Gain [dbd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	FCC limit [dBm]	Result
Channel	Modulation	RB								
Channel (B) 5MHz(BW)	QPSK	1 RB/#0	19.19	Horn Ant.	22.43	-2.75	0.6	19.08	34.8	Pass
		1 RB/#max	19.72	Horn Ant.	22.96	-2.75	0.6	19.61	34.8	Pass
		12 RB/#6	18.12	Horn Ant.	21.36	-2.75	0.6	18.01	34.8	Pass
		Full	18.16	Horn Ant.	21.40	-2.75	0.6	18.05	34.8	Pass
	16QAM	1 RB/#0	18.23	Horn Ant.	21.47	-2.75	0.6	18.12	34.8	Pass
		1 RB/#max	18.76	Horn Ant.	22.00	-2.75	0.6	18.65	34.8	Pass
		12 RB/#6	17.17	Horn Ant.	20.41	-2.75	0.6	17.06	34.8	Pass
		Full	17.14	Horn Ant.	20.38	-2.75	0.6	17.03	34.8	Pass
Channel (B) 10MHz(BW)	QPSK	1 RB/#0	19.13	Horn Ant.	22.37	-2.75	0.6	19.02	34.8	Pass
		1 RB/#max	19.10	Horn Ant.	22.34	-2.75	0.6	18.99	34.8	Pass
		25 RB/#13	18.36	Horn Ant.	21.60	-2.75	0.6	18.25	34.8	Pass
		Full	18.11	Horn Ant.	21.35	-2.75	0.6	18.00	34.8	Pass
	16QAM	1 RB/#0	18.54	Horn Ant.	21.78	-2.75	0.6	18.43	34.8	Pass
		1 RB/#max	18.76	Horn Ant.	22.00	-2.75	0.6	18.65	34.8	Pass
		25 RB/#13	17.36	Horn Ant.	20.60	-2.75	0.6	17.25	34.8	Pass



		Full	17.11	Horn Ant.	20.35	-2.75	0.6	17.00	34.8	Pass
Channel (M) 5MHz(BW)	QPSK	1 RB/#0	19.49	Horn Ant.	22.85	-2.87	0.6	19.38	34.8	Pass
		1 RB/#max	19.47	Horn Ant.	22.83	-2.87	0.6	19.36	34.8	Pass
		12 RB/#6	18.50	Horn Ant.	21.86	-2.87	0.6	18.39	34.8	Pass
		Full	18.32	Horn Ant.	21.68	-2.87	0.6	18.21	34.8	Pass
	16QAM	1 RB/#0	18.52	Horn Ant.	21.88	-2.87	0.6	18.41	34.8	Pass
		1 RB/#max	18.57	Horn Ant.	21.93	-2.87	0.6	18.46	34.8	Pass
		12 RB/#6	17.63	Horn Ant.	20.99	-2.87	0.6	17.52	34.8	Pass
		Full	17.39	Horn Ant.	20.75	-2.87	0.6	17.28	34.8	Pass
Channel (M) 10MHz(BW)	QPSK	1 RB/#0	19.14	Horn Ant.	22.50	-2.87	0.6	19.03	34.8	Pass
		1 RB/#max	19.07	Horn Ant.	22.43	-2.87	0.6	18.96	34.8	Pass
		25 RB/#13	18.34	Horn Ant.	21.70	-2.87	0.6	18.23	34.8	Pass
		Full	18.17	Horn Ant.	21.53	-2.87	0.6	18.06	34.8	Pass
	16QAM	1 RB/#0	18.24	Horn Ant.	21.60	-2.87	0.6	18.13	34.8	Pass
		1 RB/#max	18.14	Horn Ant.	21.50	-2.87	0.6	18.03	34.8	Pass
		25 RB/#13	17.06	Horn Ant.	20.42	-2.87	0.6	16.95	34.8	Pass
		Full	17.09	Horn Ant.	20.45	-2.87	0.6	16.98	34.8	Pass
Channel (T) 5MHz(BW)	QPSK	1 RB/#0	19.69	Horn Ant.	23.03	-2.85	0.6	19.58	34.8	Pass
		1 RB/#max	18.07	Horn Ant.	21.41	-2.85	0.6	17.96	34.8	Pass



		12 RB/#6	18.29	Horn Ant.	21.63	-2.85	0.6	18.18	34.8	Pass
		Full	17.99	Horn Ant.	21.33	-2.85	0.6	17.88	34.8	Pass
	16QAM	1 RB/#0	18.82	Horn Ant.	22.16	-2.85	0.6	18.71	34.8	Pass
		1 RB/#max	17.17	Horn Ant.	20.51	-2.85	0.6	17.06	34.8	Pass
		12 RB/#6	17.39	Horn Ant.	20.73	-2.85	0.6	17.28	34.8	Pass
		Full	17.12	Horn Ant.	20.46	-2.85	0.6	17.01	34.8	Pass
Channel (T) 10MHz(BW)	QPSK	1 RB/#0	19.46	Horn Ant.	22.80	-2.85	0.6	19.35	34.8	Pass
		1 RB/#max	18.76	Horn Ant.	22.10	-2.85	0.6	18.65	34.8	Pass
		25 RB/#13	18.62	Horn Ant.	21.96	-2.85	0.6	18.51	34.8	Pass
		Full	18.49	Horn Ant.	21.83	-2.85	0.6	18.38	34.8	Pass
	16QAM	1 RB/#0	18.58	Horn Ant.	21.92	-2.85	0.6	18.47	34.8	Pass
		1 RB/#max	17.84	Horn Ant.	21.18	-2.85	0.6	17.73	34.8	Pass
		25 RB/#13	17.70	Horn Ant.	21.04	-2.85	0.6	17.59	34.8	Pass
		Full	17.42	Horn Ant.	20.76	-2.85	0.6	17.31	34.8	Pass

Note1: a, For getting the ERP (Efficient Radiated Power) in substitution method, the following formula should be taken to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dbd]}$$

b, SGP=Signal Generator Level

Note2: RBW > emission bandwidth, VBW > 3 x RBW.

-----END-----



Appendix B

Modulation Characteristics

According to FCC Part 2.1047& FCC Part 27C & M




Test Mode = TM1

Channel Bandwidth = 5 MHz

Channel = M

QPSK/full RBs

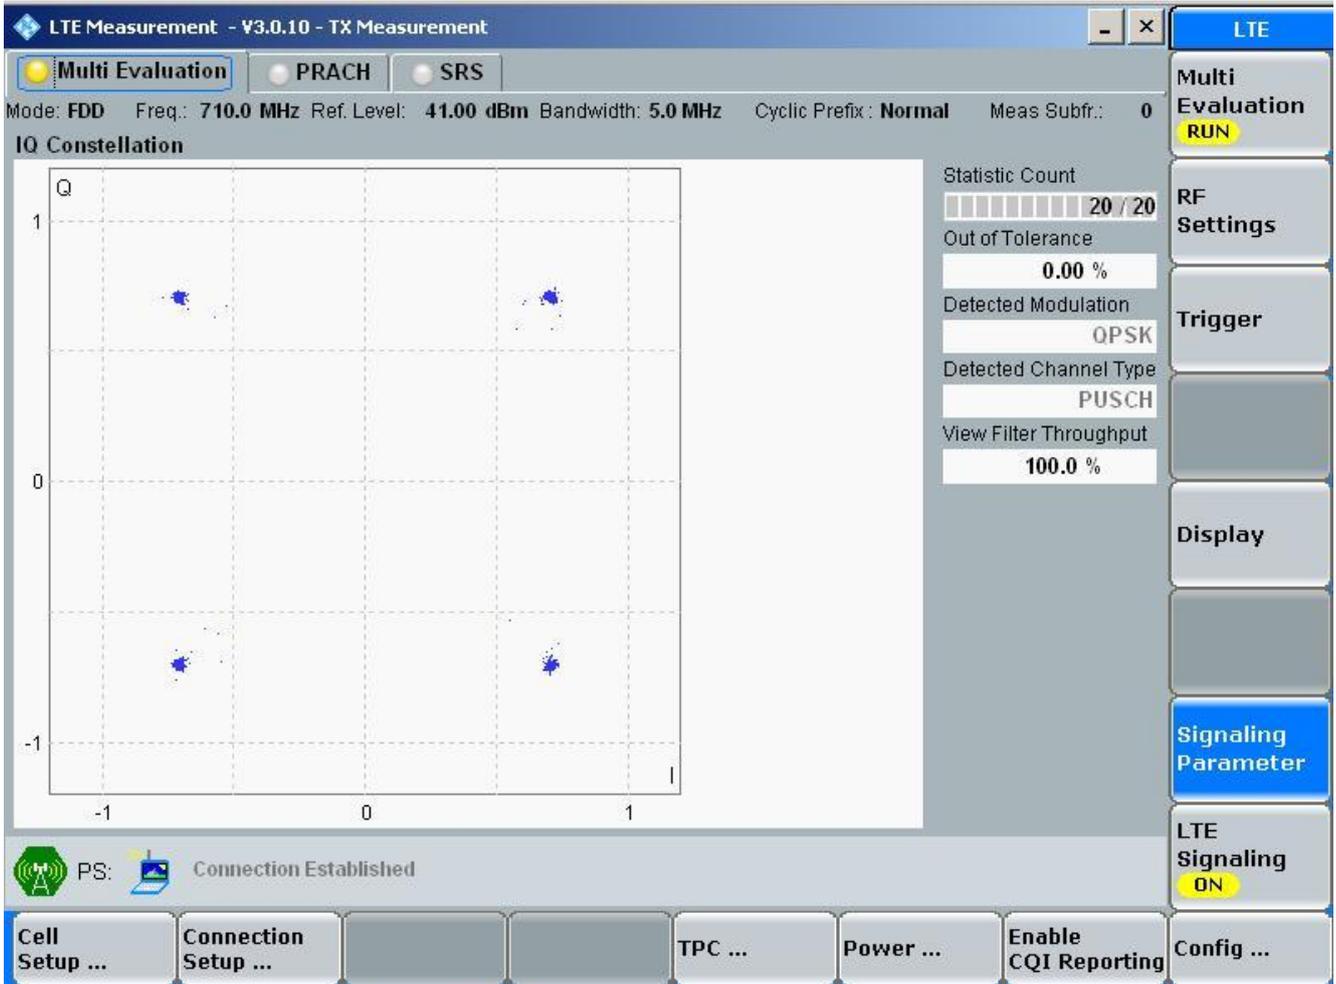



Channel Bandwidth = 10 MHz

Channel = M

QPSK/full RBs

The screenshot displays the 'LTE Measurement - V3.0.10 - TX Measurement' software interface. At the top, it shows 'Multi Evaluation' as the active mode, with 'PRACH' and 'SRS' options also visible. The main status bar indicates: Mode: FDD, Freq.: 710.0 MHz, Ref. Level: 41.00 dBm, Bandwidth: 10.0 MHz, Cyclic Prefix: Normal, and Meas Subfr.: 0.

The central 'IQ Constellation' plot shows a 2D scatter plot with the vertical axis labeled 'Q' and the horizontal axis labeled 'I', both ranging from -1 to 1. Four distinct clusters of blue data points are visible, representing the QPSK modulation scheme.

On the right side, a 'Statistic Count' section shows a progress bar for '20 / 20' samples. Below this, 'Out of Tolerance' is listed as 0.00%. The 'Detected Modulation' is identified as QPSK, and the 'Detected Channel Type' is PUSCH. The 'View Filter Throughput' is shown as 100.0%.

The bottom of the interface features a status bar with 'PS: Connection Established' and a series of control buttons: 'Cell Setup ...', 'Connection Setup ...', 'TPC ...', 'Power ...', 'Enable CQI Reporting', and 'Config ...'. A vertical toolbar on the far right contains buttons for 'LTE', 'Multi Evaluation RUN', 'RF Settings', 'Trigger', 'Display', 'Signaling Parameter', 'LTE Signaling ON', and 'Config ...'.



Test Mode = TM2

Channel Bandwidth = 5 MHz

Channel = M

16QAM/full RBs

The screenshot displays the 'LTE Measurement - V3.0.10 - TX Measurement' software interface. The main window shows an 'IQ Constellation' plot with a grid from -1 to 1 on both axes. The plot contains 16 blue dots representing the 16-QAM constellation. To the right of the plot, a 'Statistic Count' section shows a progress bar for 20/20 samples, with 'Out of Tolerance' at 0.00%, 'Detected Modulation' as 16-QAM, 'Detected Channel Type' as PUSCH, and 'View Filter Throughput' at 100.0%. The interface includes a top menu bar with 'Multi Evaluation', 'PRACH', and 'SRS' options. Below the plot, a status bar indicates 'PS: Connection Established'. At the bottom, there are several control buttons: 'Cell Setup ...', 'Connection Setup ...', 'TPC ...', 'Power ...', 'Enable CQI Reporting', and 'Config ...'. On the far right, a vertical toolbar contains buttons for 'LTE', 'Multi Evaluation RUN', 'RF Settings', 'Trigger', 'Display', 'Signaling Parameter', 'LTE Signaling ON', and 'Config ...'.



Channel Bandwidth = 10 MHz

Channel = M

16QAM/full RBs

The screenshot displays the 'LTE Measurement - V3.0.10 - TX Measurement' window. The 'Multi Evaluation' tab is active. The main display area shows an 'IQ Constellation' plot with a grid and 16 data points. To the right of the plot, a 'Statistic Count' section shows '20 / 20' and 'Out of Tolerance' at '0.00 %'. Below this, 'Detected Modulation' is '16-QAM' and 'Detected Channel Type' is 'PUSCH'. 'View Filter Throughput' is '100.0 %'. On the far right, a vertical toolbar contains buttons for 'Multi Evaluation RUN', 'RF Settings', 'Trigger', 'Display', 'Signaling Parameter', 'LTE Signaling ON', 'Cell Setup ...', 'Connection Setup ...', 'TPC ...', 'Power ...', 'Enable CQI Reporting', and 'Config ...'. At the bottom left, a status bar shows 'PS: Connection Established'.

-----END-----



Appendix C

Occupied Bandwidth According to FCC part 2.1049 & Part 27 Subpart C&M



TABLE OF CONTENTS

TABLE OF CONTENTS	2
TABLE 1 MEASUREMENT RESULTS (LTE) BAND 17	4
1 FOR BAND 17	5
1.1 TEST MODE=TM1.....	5
1.1.1 Channel Bandwidth = 5 MHz.....	5
1.1.1.1 Channel = B.....	5
1.1.1.1.1 QPSK/1RB # 0	5
1.1.1.1.2 QPSK/1RB # max.....	6
1.1.1.1.3 QPSK/non-1RB #mid/2	7
1.1.1.1.4 QPSK/full RBs.....	8
1.1.1.2 Channel =M.....	9
1.1.1.2.1 QPSK/1RB # 0	9
1.1.1.2.2 QPSK/1RB # max.....	10
1.1.1.2.3 QPSK/non-1RB #mid/2	11
1.1.1.2.4 QPSK/full RBs.....	12
1.1.1.3 Channel =T	13
1.1.1.3.1 QPSK/1RB # 0	13
1.1.1.3.2 QPSK/1RB # max.....	14
1.1.1.3.3 QPSK/non-1RB #mid/2	15
1.1.1.3.4 QPSK/full RBs.....	16
1.1.2 Channel Bandwidth = 10 MHz.....	17
1.1.2.1 Channel = B.....	17
1.1.2.1.1 QPSK/1RB # 0	17
1.1.2.1.2 QPSK/1RB # max.....	18
1.1.2.1.3 QPSK/non-1RB #mid/2	19
1.1.2.1.4 QPSK/full RBs.....	20
1.1.2.2 Channel =M.....	21
1.1.2.2.1 QPSK/1RB # 0	21
1.1.2.2.2 QPSK/1RB # max.....	22
1.1.2.2.3 QPSK/non-1RB #mid/2	23
1.1.2.2.4 QPSK/full RBs.....	24
1.1.2.3 Channel =T	25
1.1.2.3.1 QPSK/1RB # 0	25
1.1.2.3.2 QPSK/1RB # max.....	26
1.1.2.3.3 QPSK/non-1RB #mid/2	27
1.1.2.3.4 QPSK/full RBs.....	28
2 TEST MODE=TM2	29
2.1.1 Channel Bandwidth = 5 MHz.....	29
2.1.1.1 Channel =B.....	29
2.1.1.1.1 16QAM/1RB # 0.....	29
2.1.1.1.2 16QAM /1RB # max.....	30
2.1.1.1.3 16QAM /non-1RB #mid/2.....	31
2.1.1.1.4 16QAM /full RBs.....	32
2.1.1.2 Channel =M.....	33
2.1.1.2.1 16QAM/1RB # 0.....	33
2.1.1.2.2 16QAM /1RB # max.....	34
2.1.1.2.3 16QAM /non-1RB #mid/2.....	35
2.1.1.2.4 16QAM /full RBs.....	36
2.1.1.3 Channel =T	37
2.1.1.3.1 16QAM/1RB # 0.....	37



2.1.1.3.2	16QAM /1RB # max.....	38
2.1.1.3.3	16QAM /non-1RB #mid/2.....	39
2.1.1.3.4	16QAM /full RBs.....	40
2.1.2	<i>Channel Bandwidth = 10 MHz</i>	41
2.1.2.1	Channel =B.....	41
2.1.2.1.1	16QAM/1RB # 0.....	41
2.1.2.1.2	16QAM /1RB # max.....	42
2.1.2.1.3	16QAM /non-1RB #mid/2.....	43
2.1.2.1.4	16QAM /full RBs.....	44
2.1.2.2	Channel =M.....	45
2.1.2.2.1	16QAM/1RB # 0.....	45
2.1.2.2.2	16QAM /1RB # max.....	46
2.1.2.2.3	16QAM /non-1RB #mid/2.....	47
2.1.2.2.4	16QAM /full RBs.....	48
2.1.2.3	Channel =T.....	49
2.1.2.3.1	16QAM/1RB # 0.....	49
2.1.2.3.2	16QAM /1RB # max.....	50
2.1.2.3.3	16QAM /non-1RB #mid/2.....	51
2.1.2.3.4	16QAM /full RBs.....	52



Result Table

NOTE: All relevant operation modes have been tested, and the full RB data is included in this table.

Table 1 Measurement Results (LTE) BAND 17

Test Mode	Carrier Conf.	RF Ch.	Occupied Bandwidth [MHz]	Verdict
TM1	5 MHz	L	4.45	Pass
		M	4.42	Pass
		H	4.49	Pass
	10 MHz	L	8.79	Pass
		M	8.87	Pass
		H	8.78	Pass
TM2	5 MHz	L	4.49	Pass
		M	4.47	Pass
		H	4.46	Pass
	10 MHz	L	8.92	Pass
		M	8.91	Pass
		H	8.83	Pass




1 For Band 17

1.1 Test Mode=TM1

1.1.1 Channel Bandwidth = 5 MHz


1.1.1.1 Channel = B

1.1.1.1.1 QPSK/1RB # 0

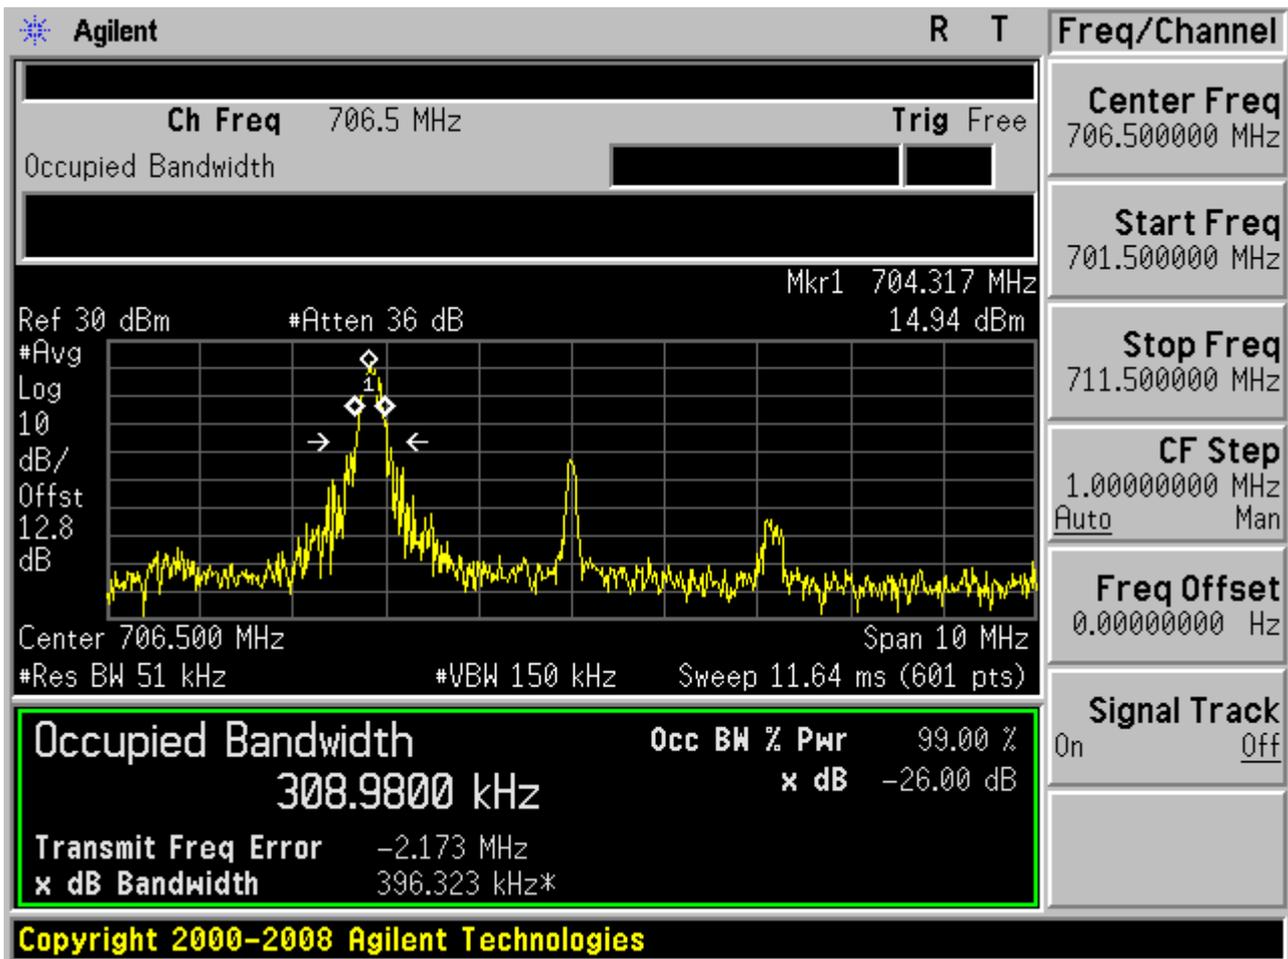




1.1.1.1.2 QPSK/1RB # max

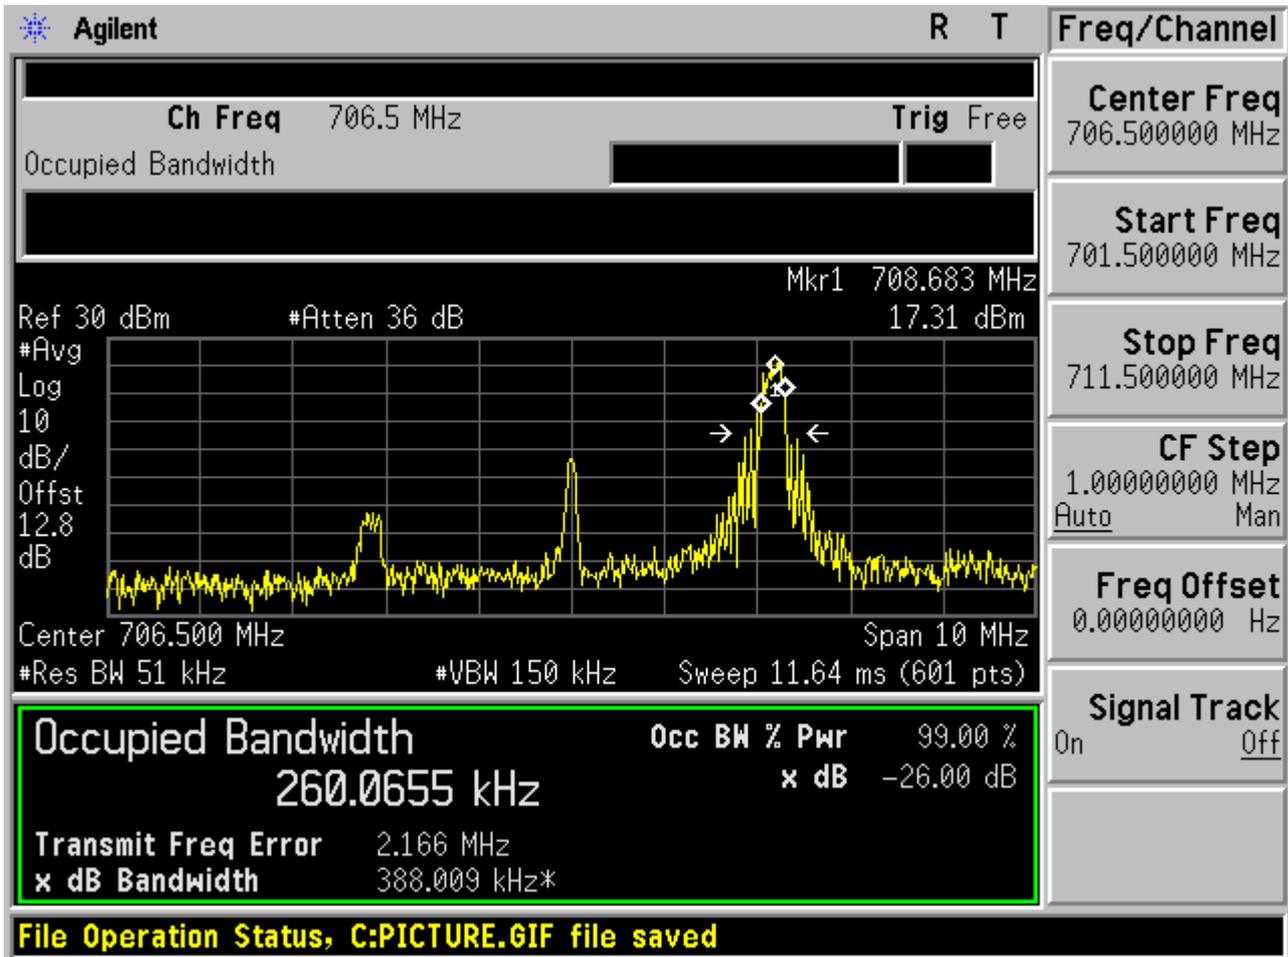




1.1.1.1.3 QPSK/non-1RB #mid/2

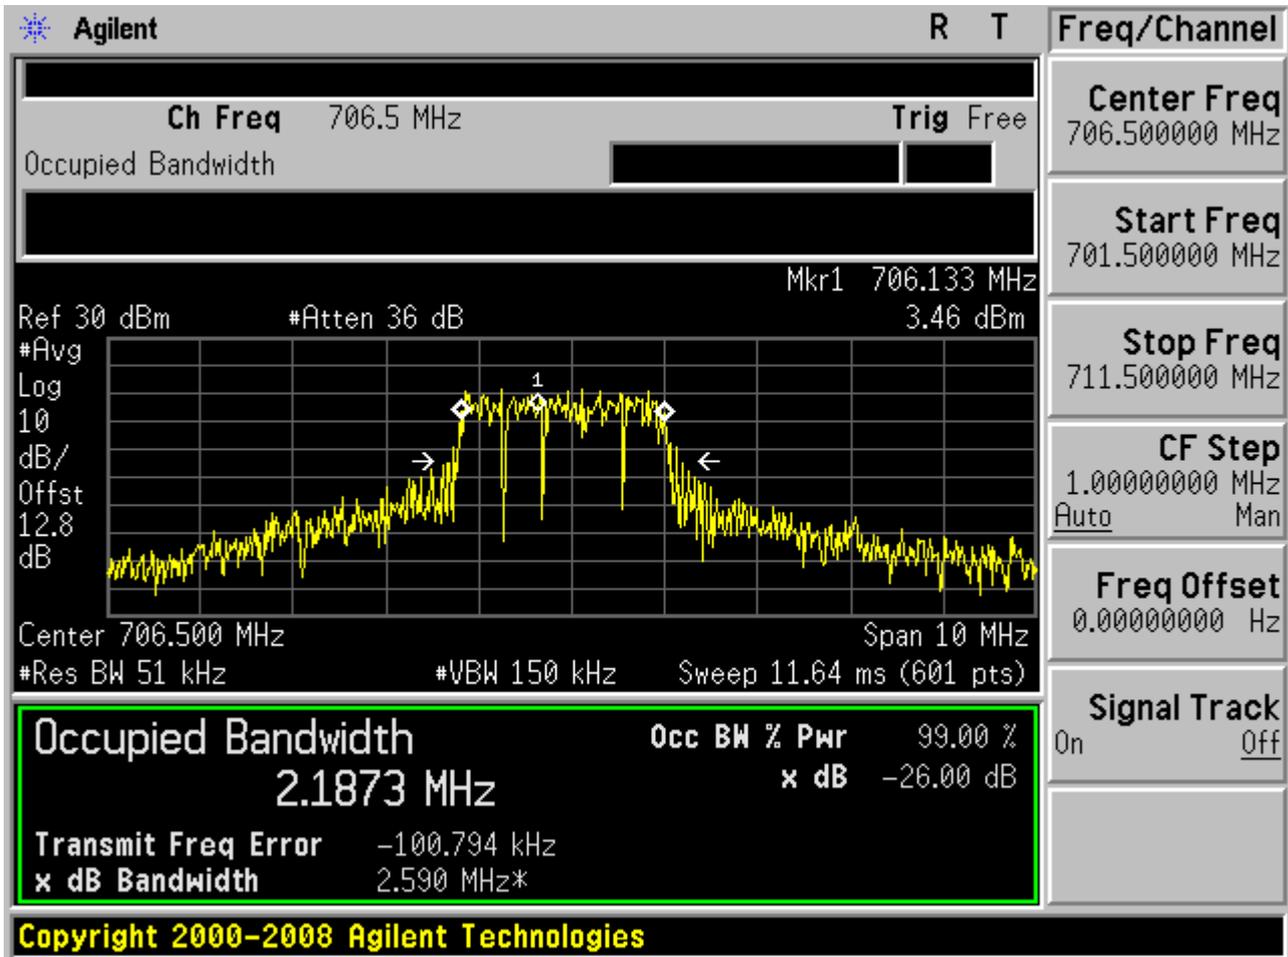




1.1.1.1.4 QPSK/full RBs

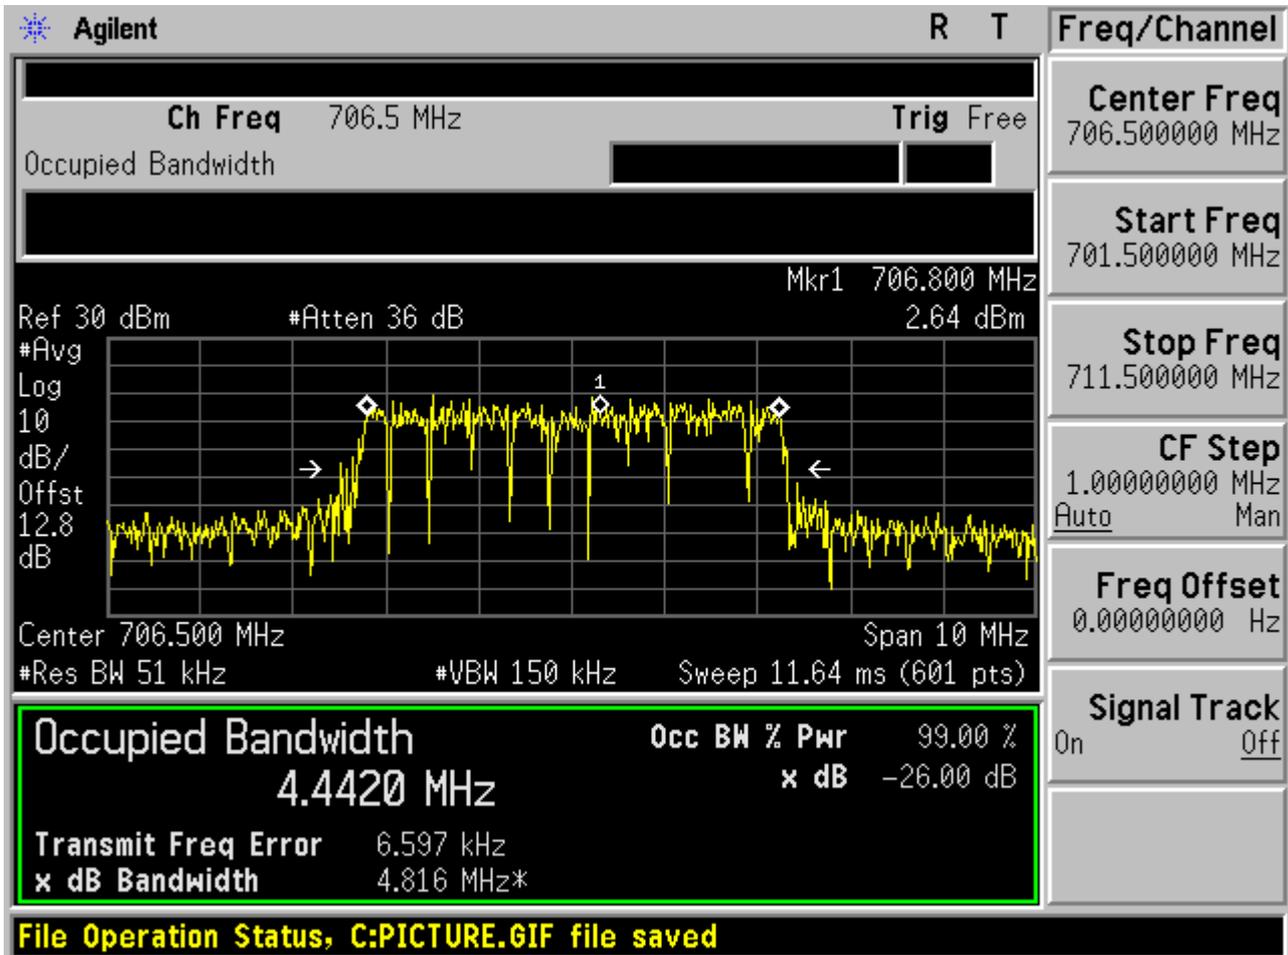




1.1.1.2 Channel =M

1.1.1.2.1 QPSK/1RB # 0

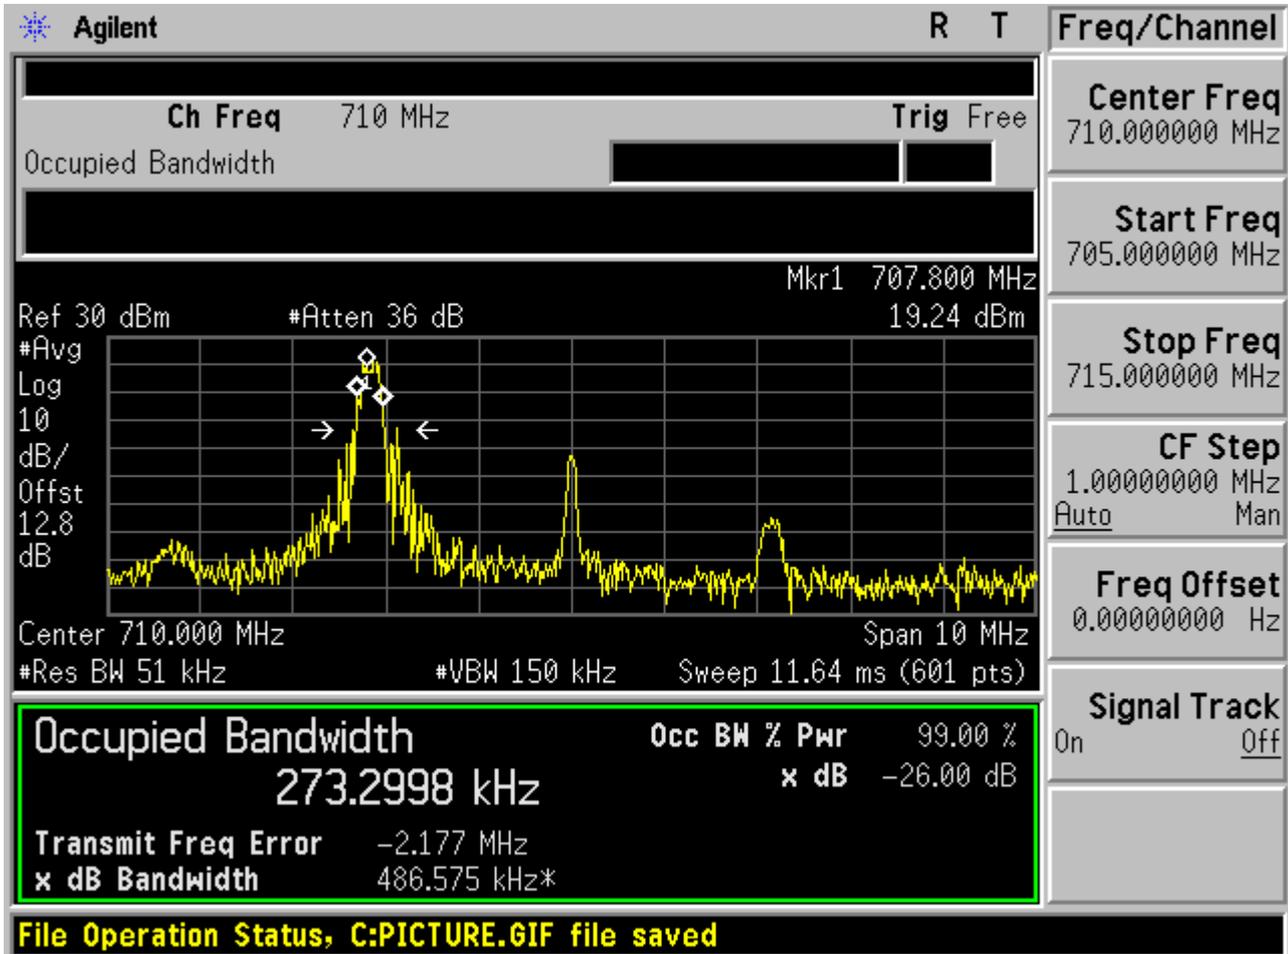




1.1.1.2.2 QPSK/1RB # max

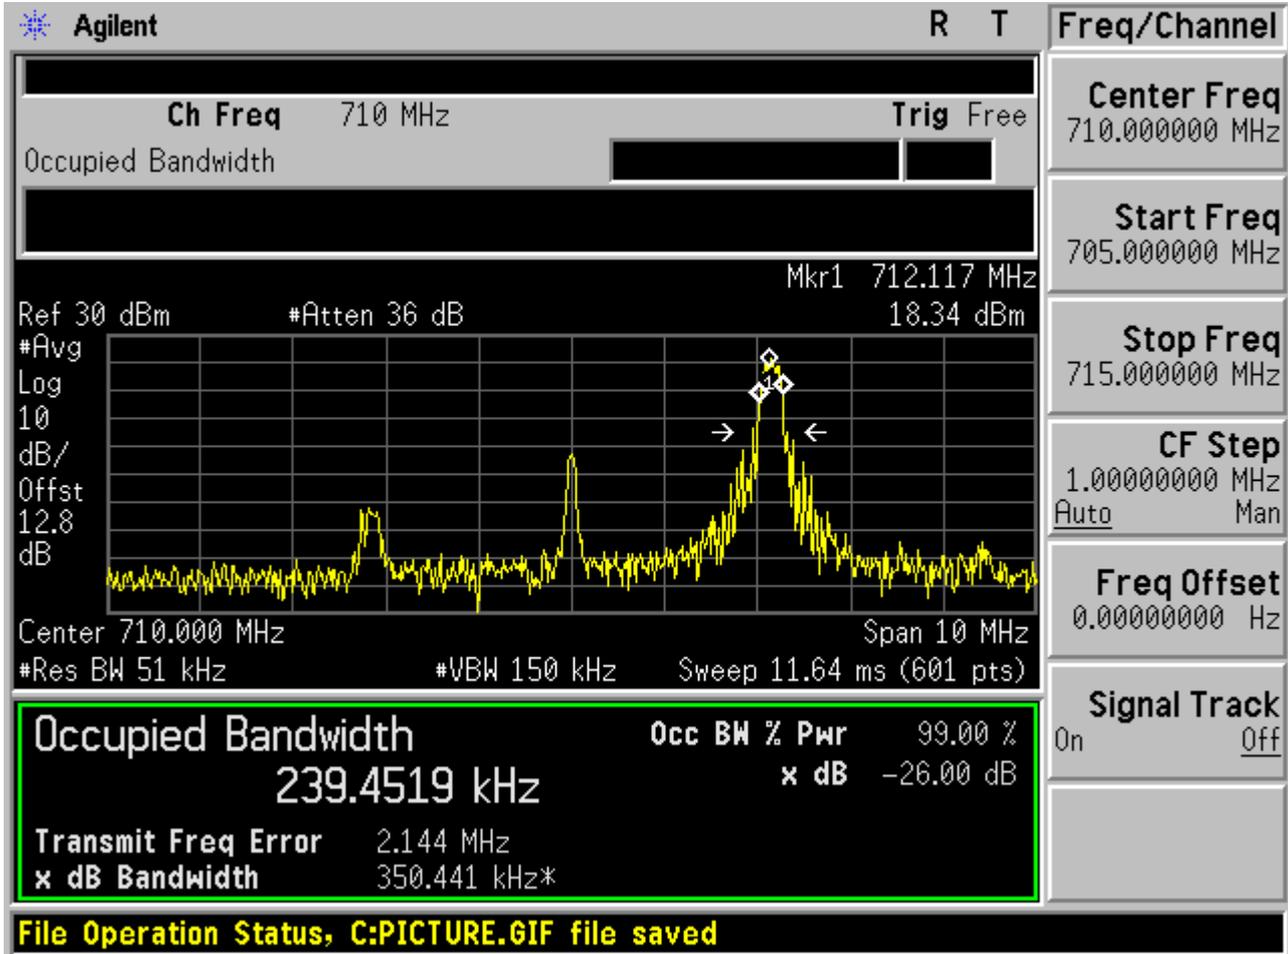




1.1.1.2.3 QPSK/non-1RB #mid/2

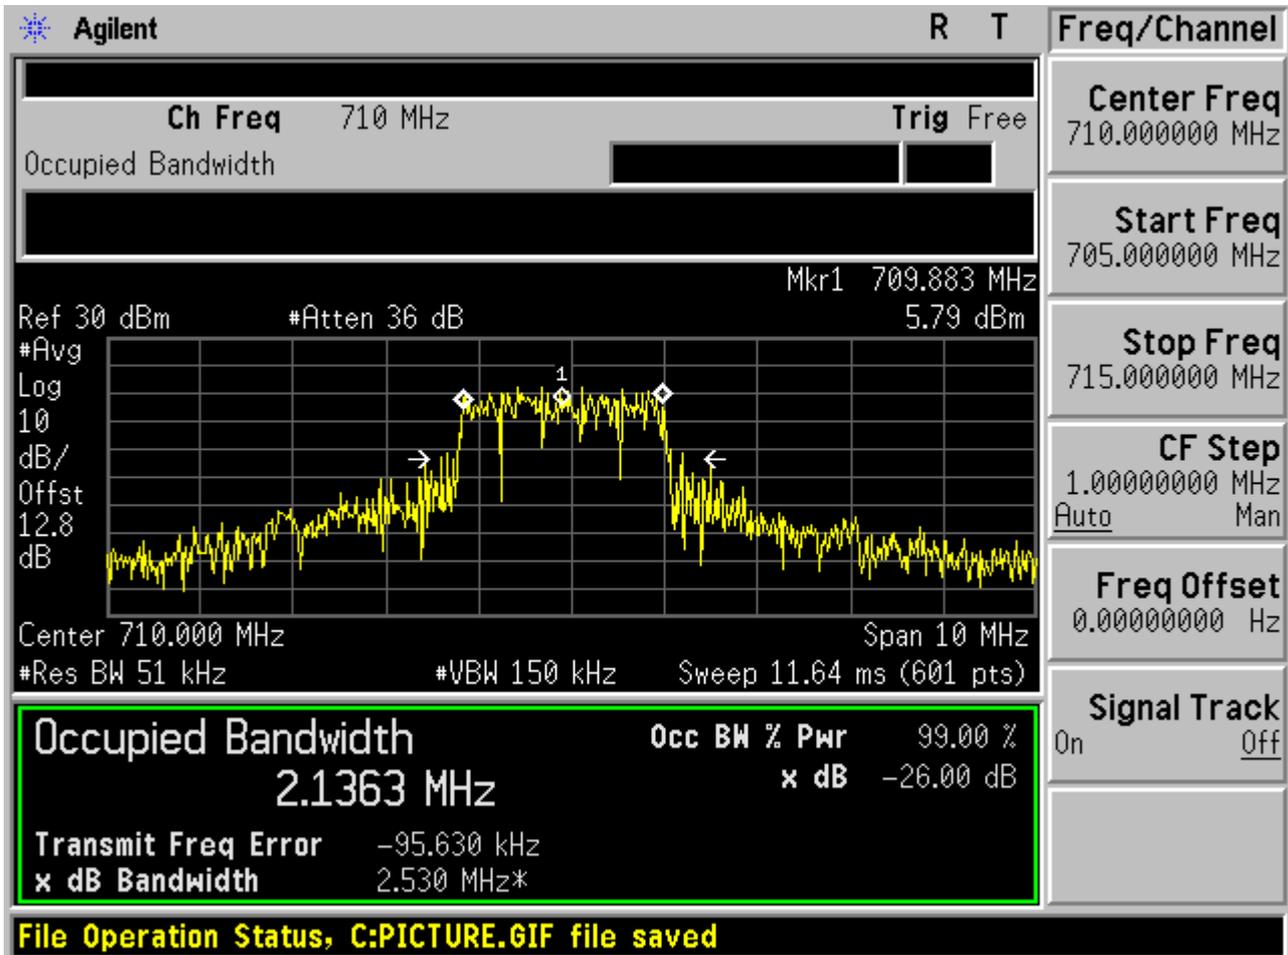




1.1.1.2.4 QPSK/full RBs

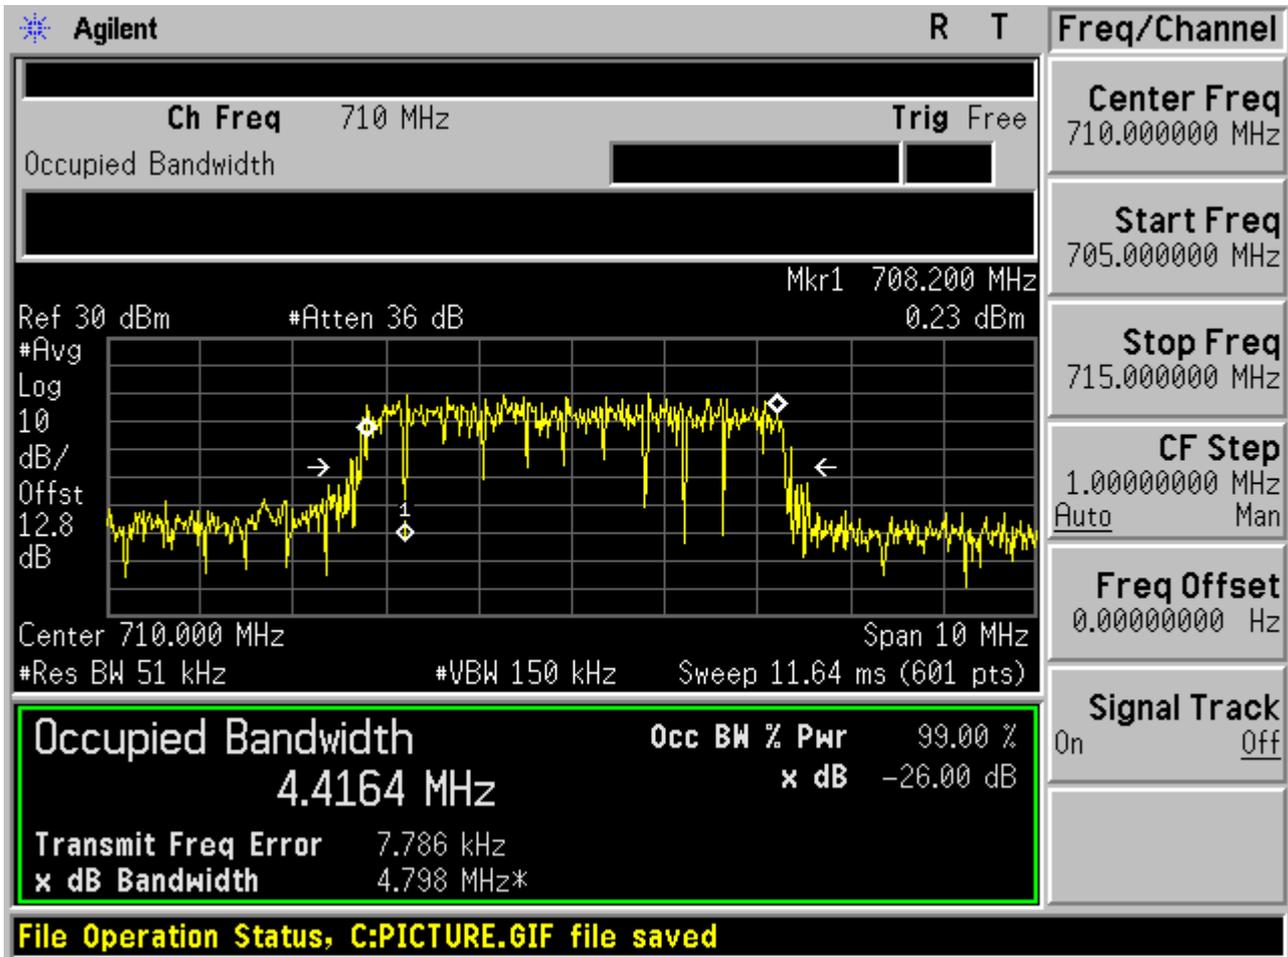




1.1.1.3 Channel =T

1.1.1.3.1 QPSK/1RB # 0

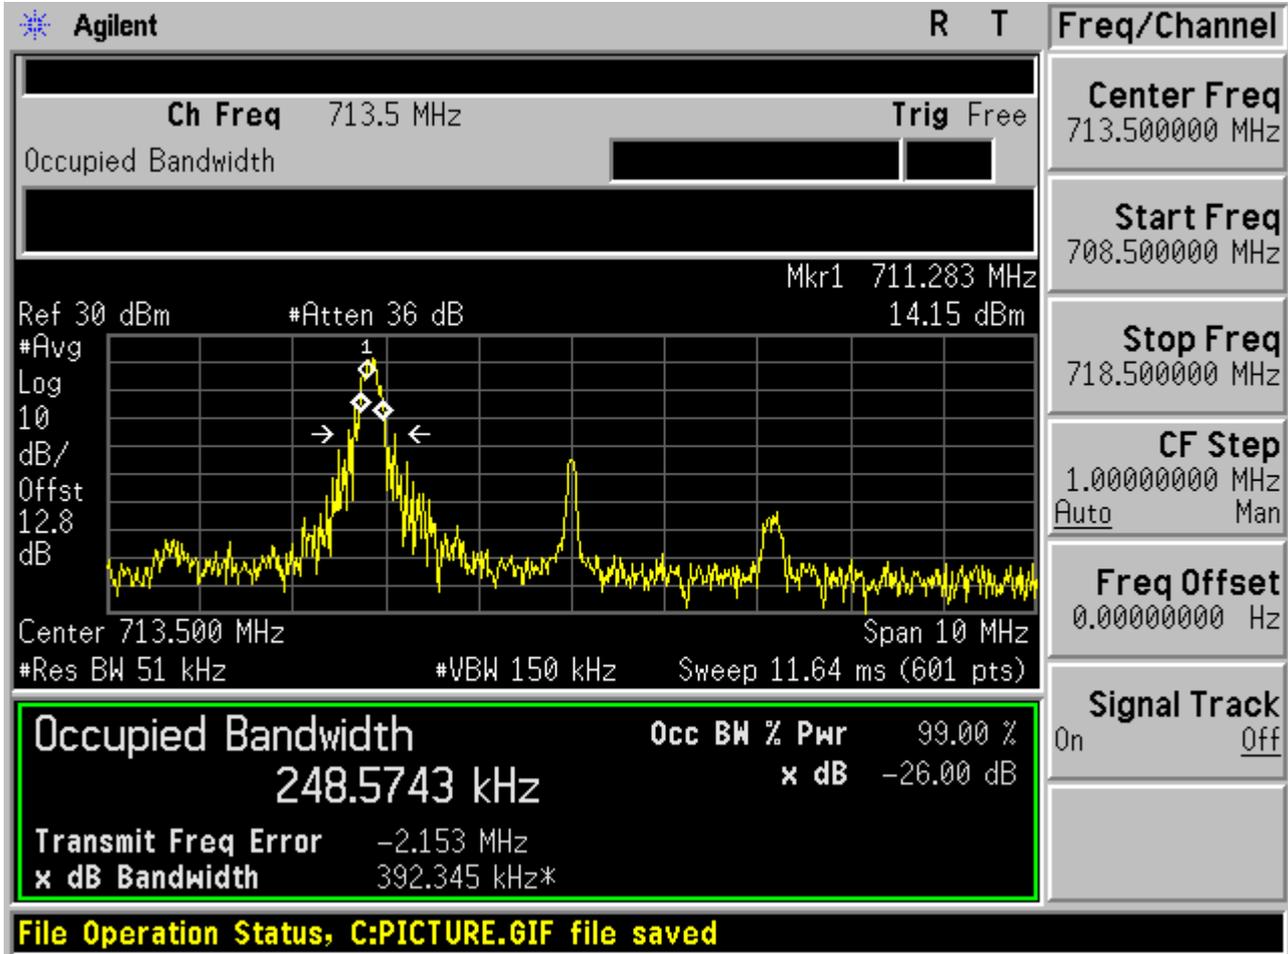




1.1.1.3.2 QPSK/1RB # max

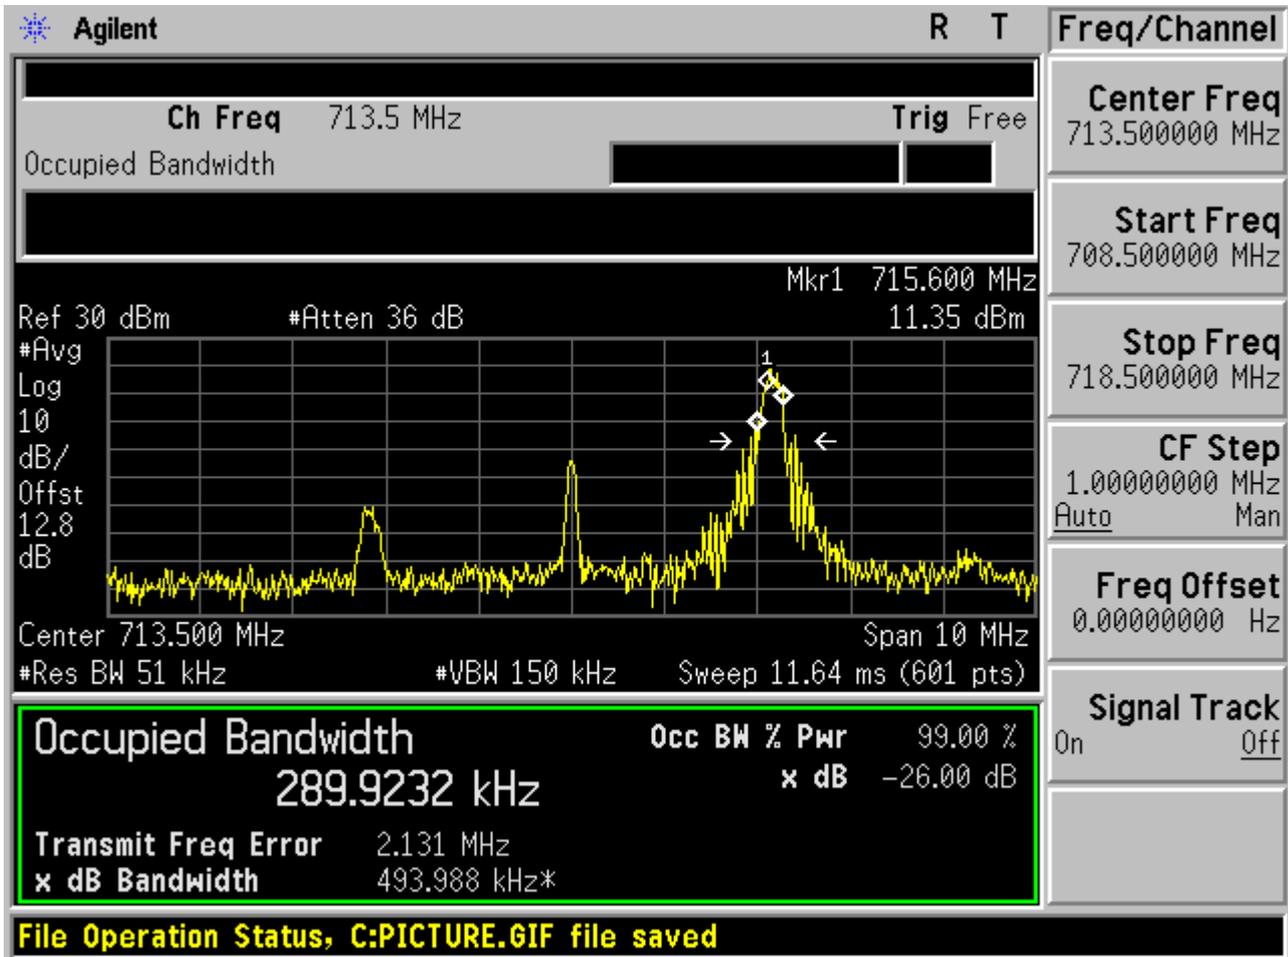




1.1.1.3.3 QPSK/non-1RB #mid/2

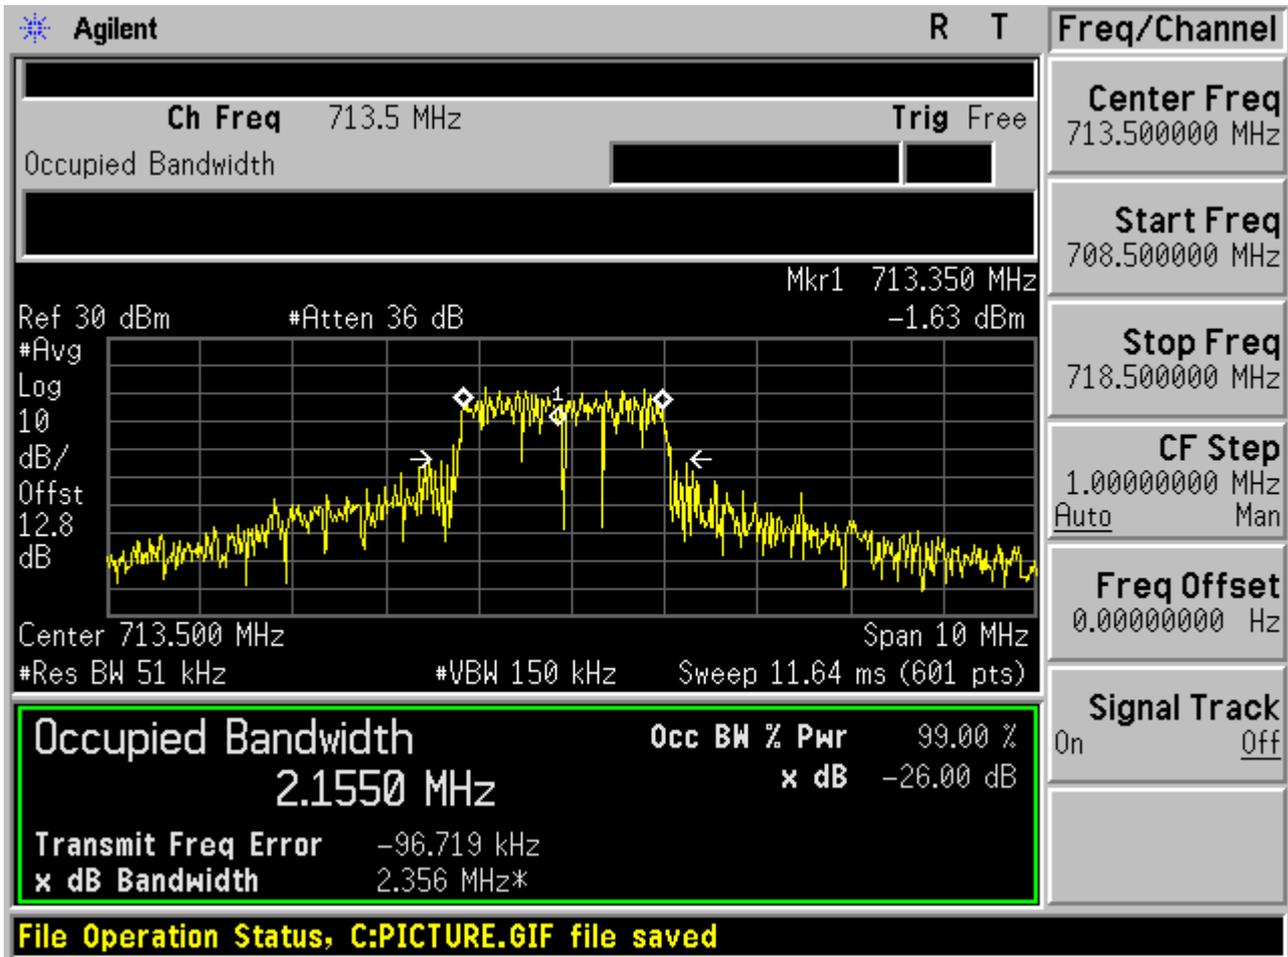



1.1.1.3.4 QPSK/full RBs

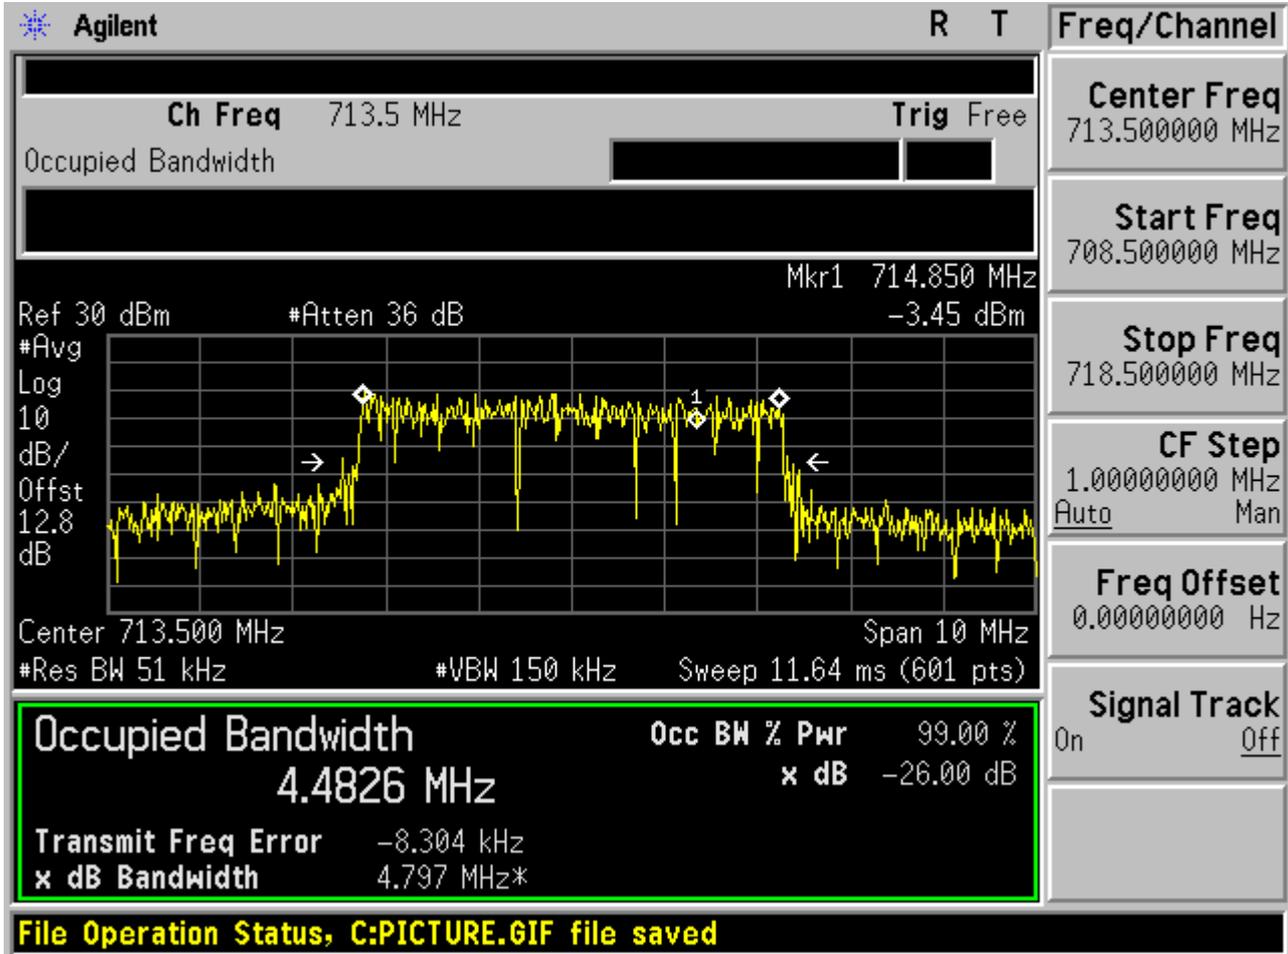




1.1.2 Channel Bandwidth = 10 MHz


1.1.2.1 Channel = B

1.1.2.1.1 QPSK/1RB # 0

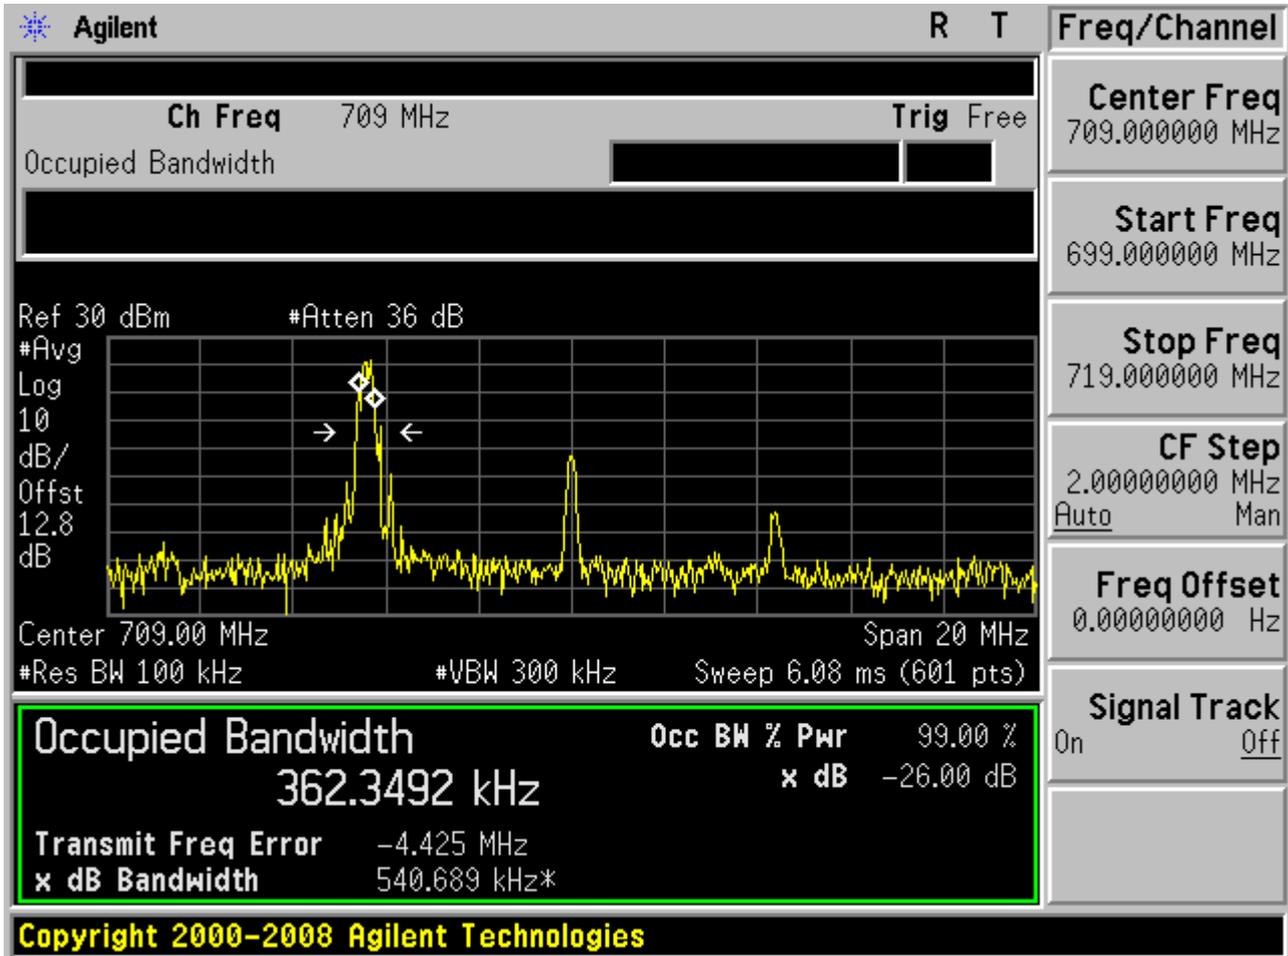




1.1.2.1.2 QPSK/1RB # max

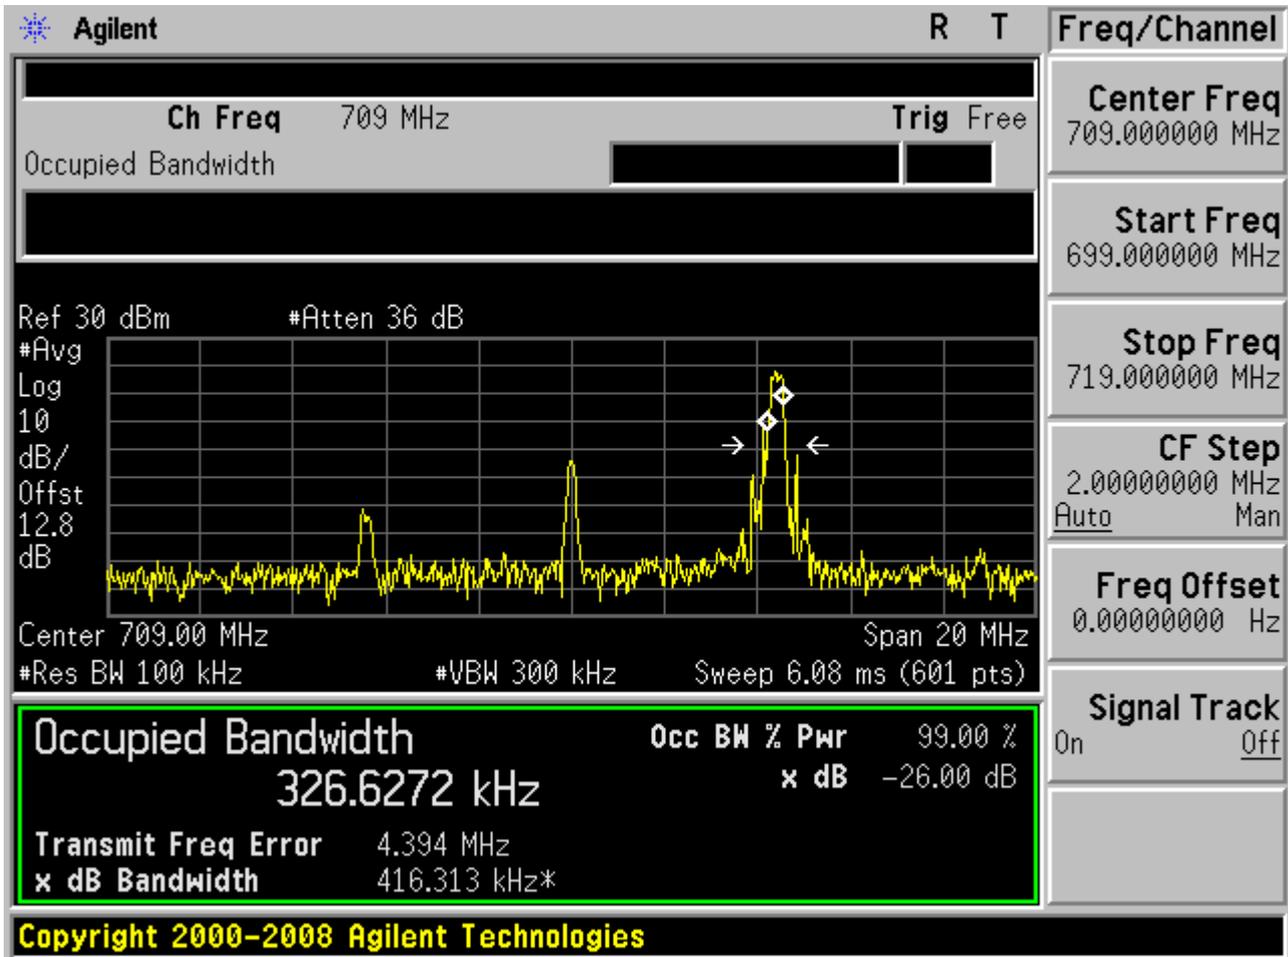




1.1.2.1.3 QPSK/non-1RB #mid/2

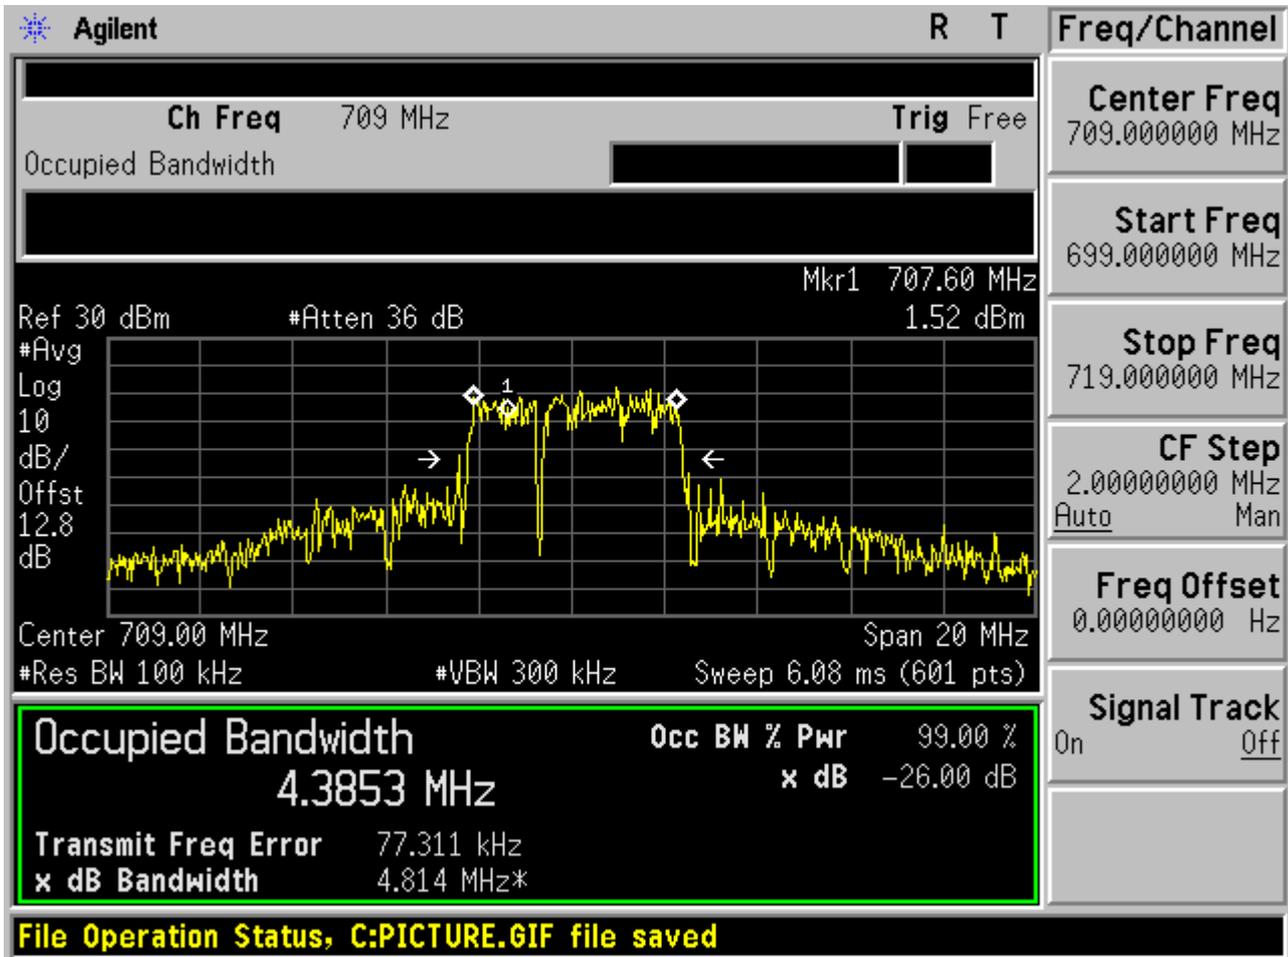




1.1.2.1.4 QPSK/full RBs

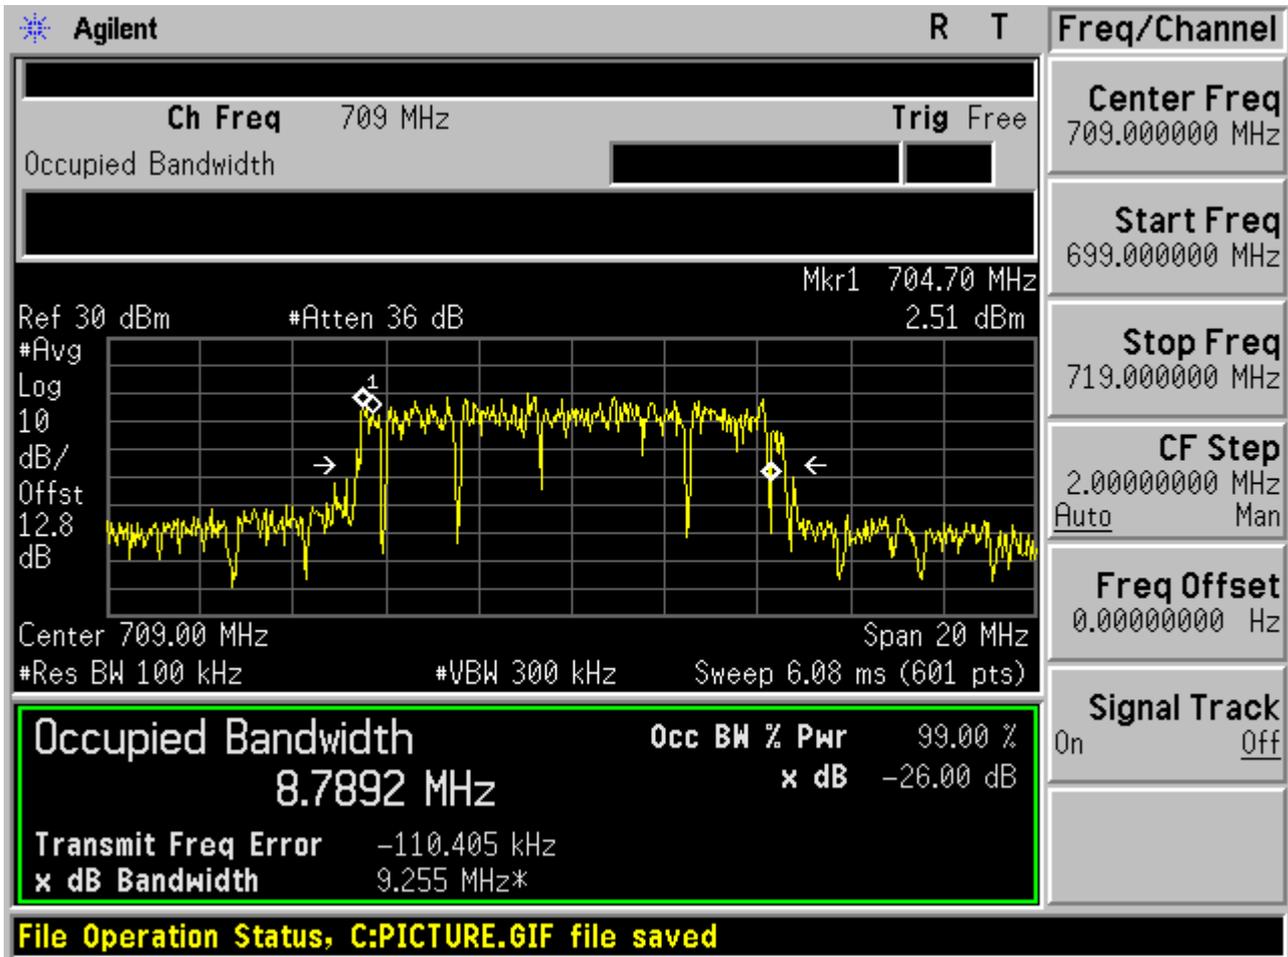




1.1.2.2 Channel =M

1.1.2.2.1 QPSK/1RB # 0

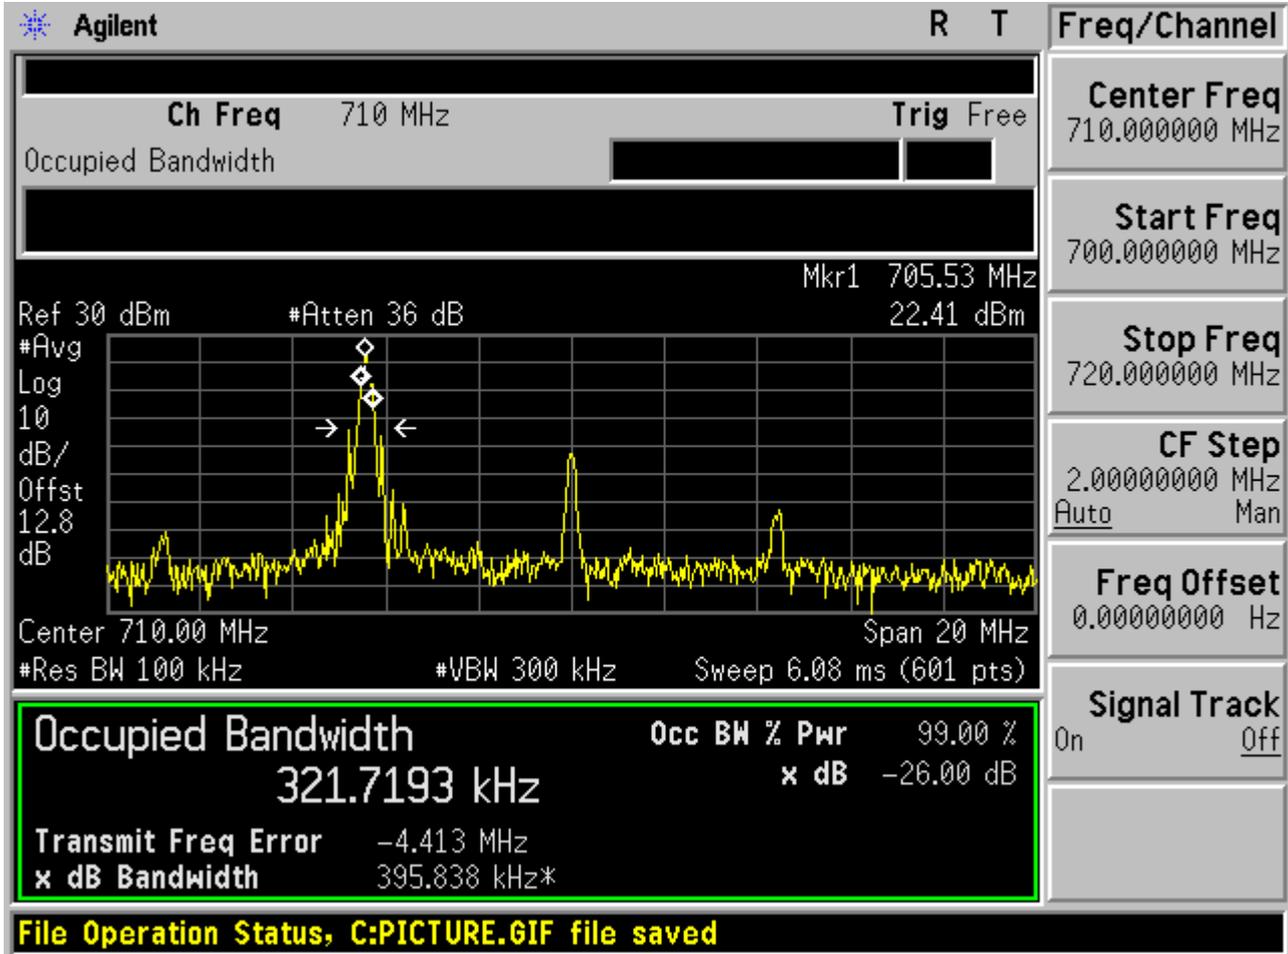




1.1.2.2.2 QPSK/1RB # max

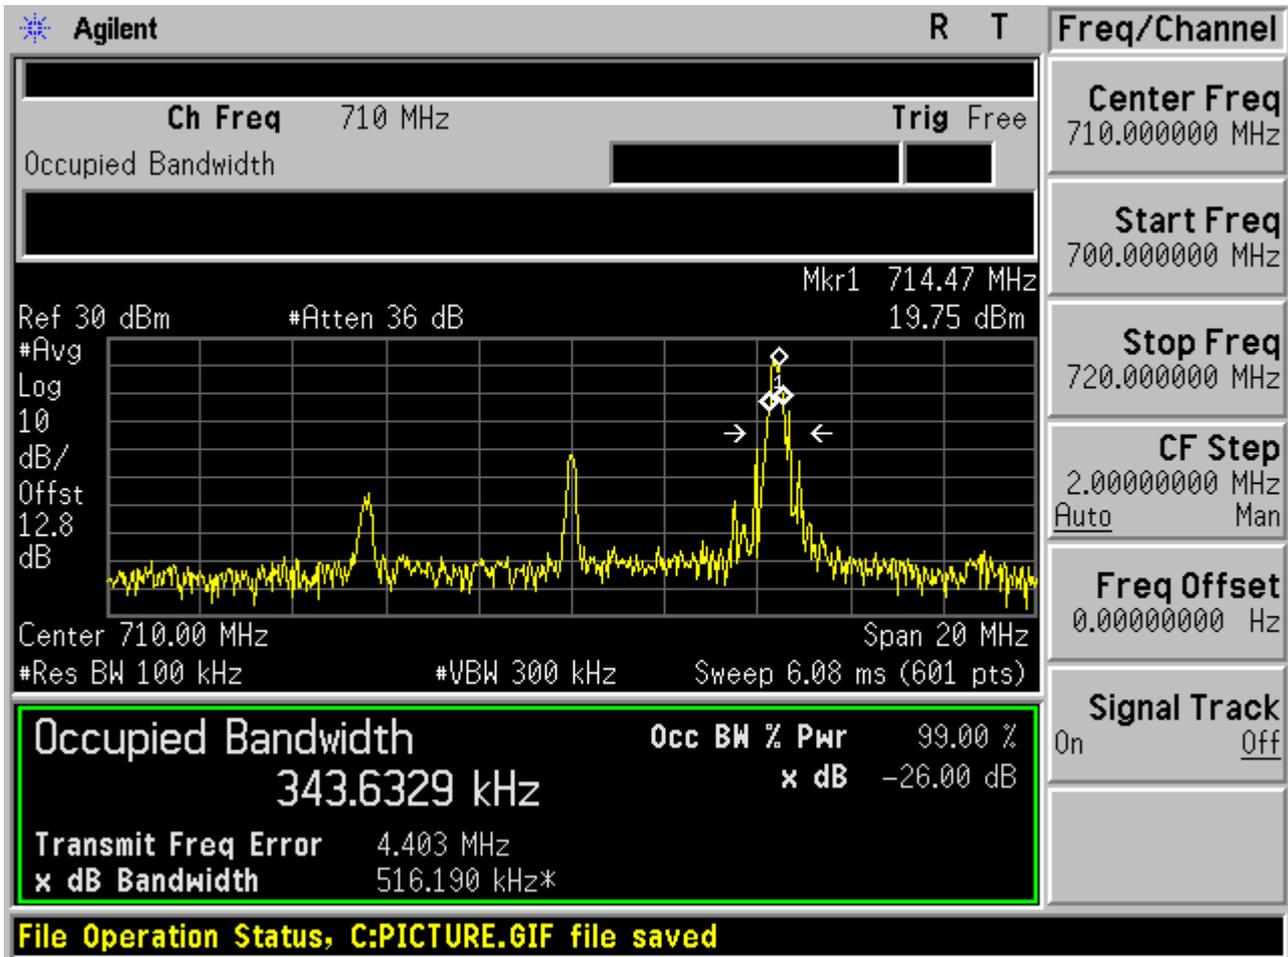




1.1.2.2.3 QPSK/non-1RB #mid/2

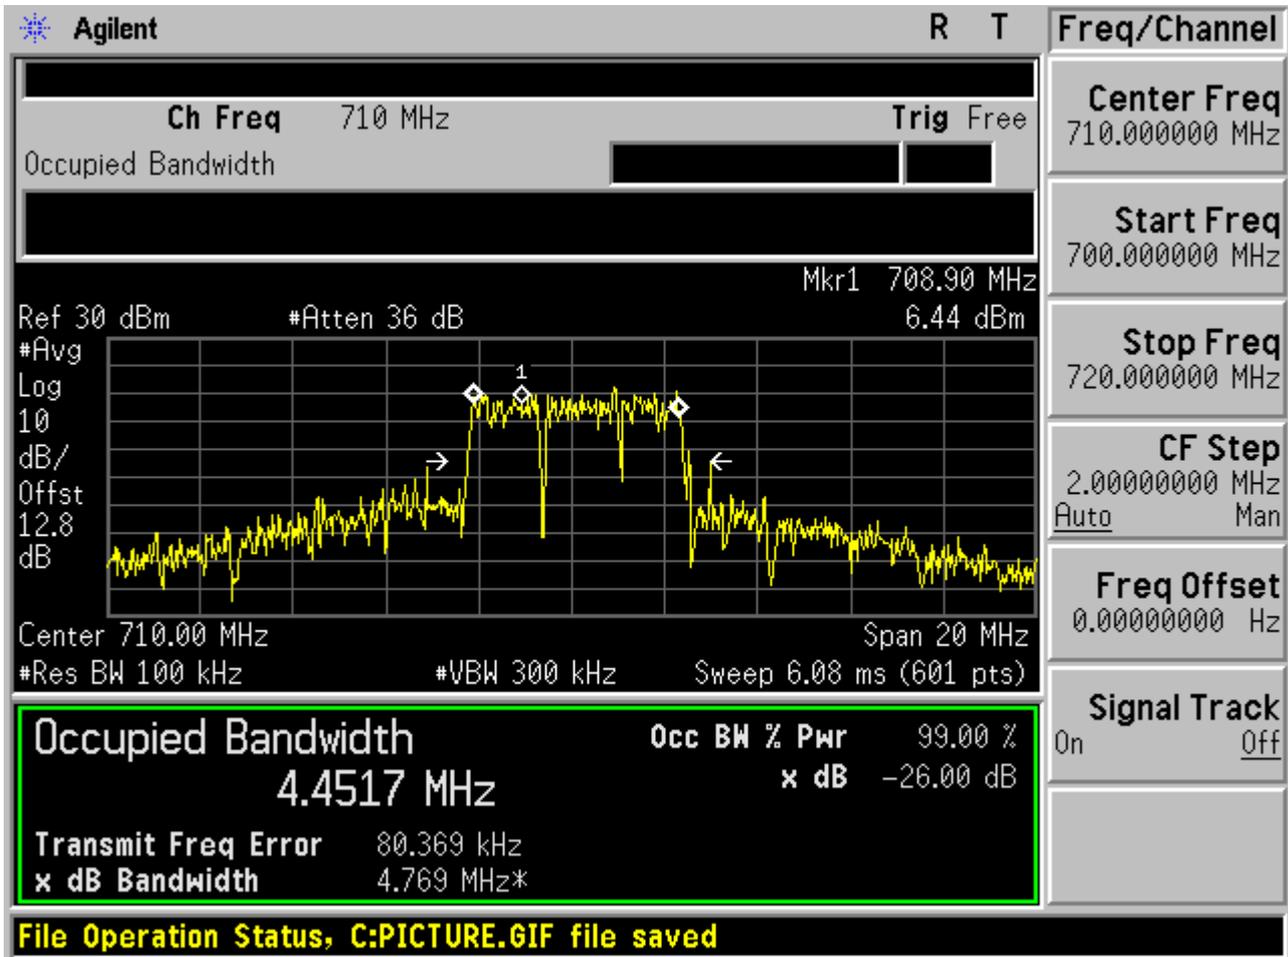




1.1.2.2.4 QPSK/full RBs

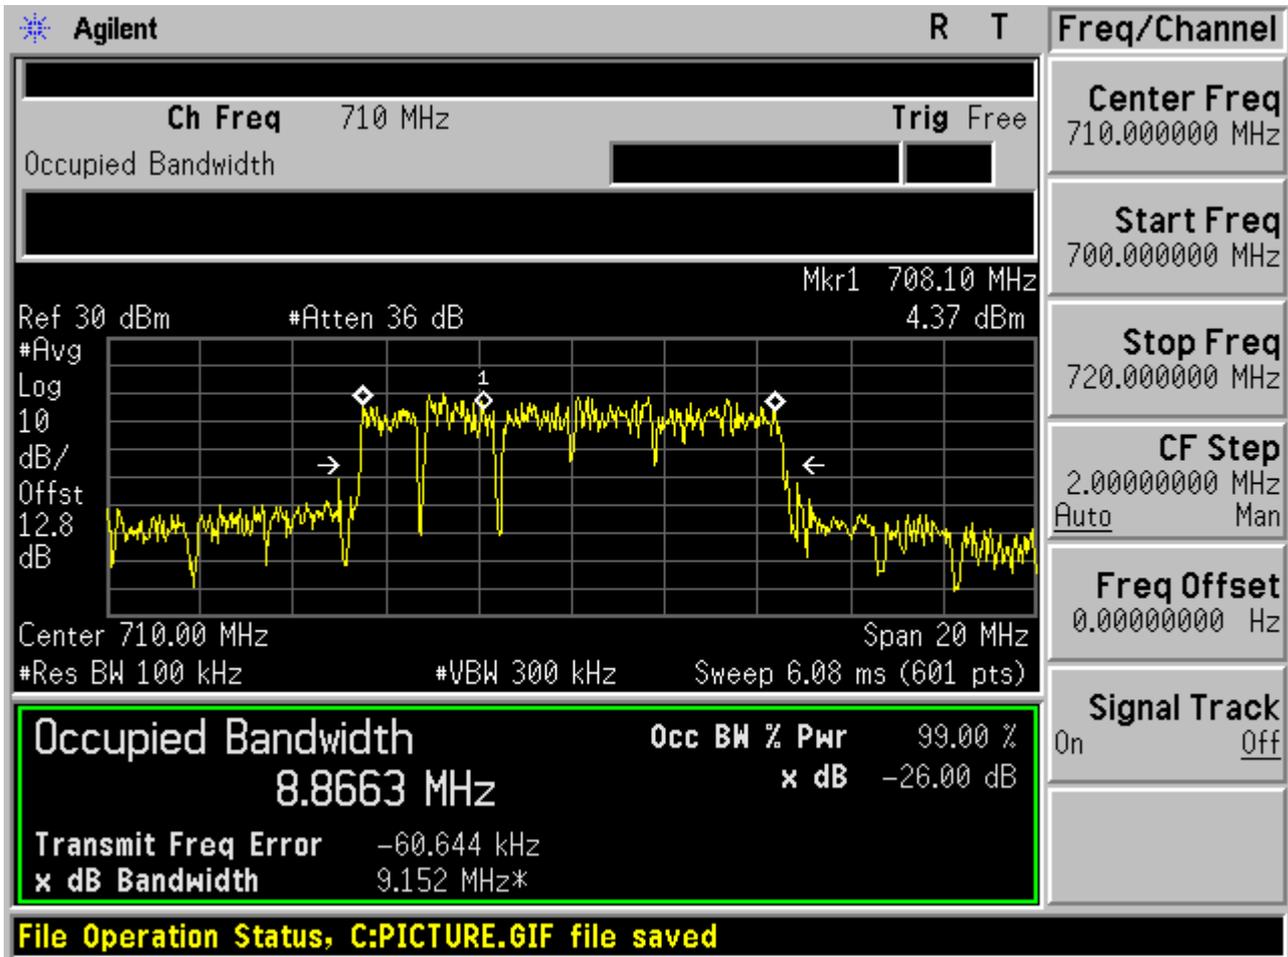




1.1.2.3 Channel =T

1.1.2.3.1 QPSK/1RB # 0

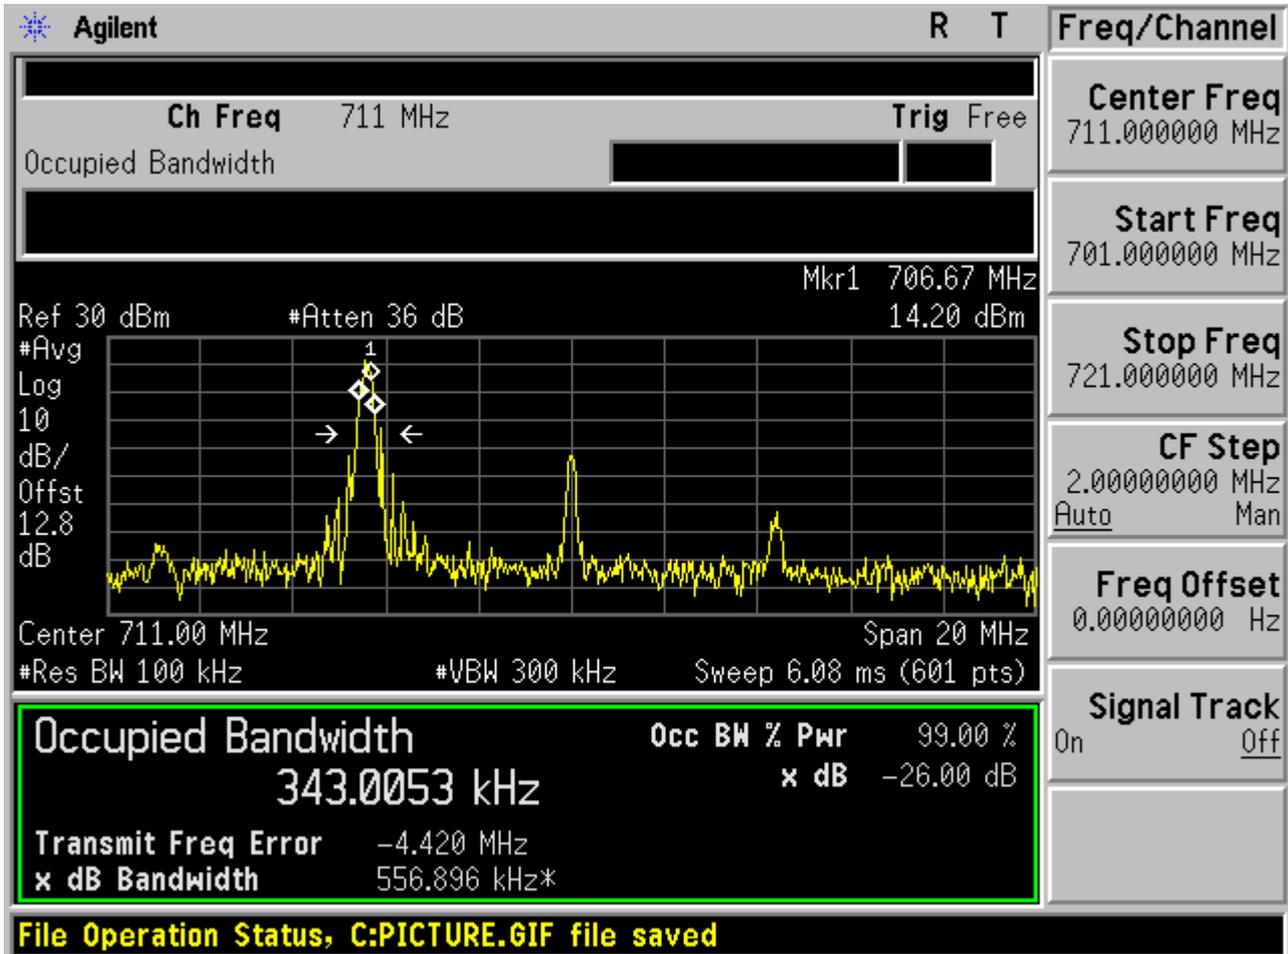




1.1.2.3.2 QPSK/1RB # max

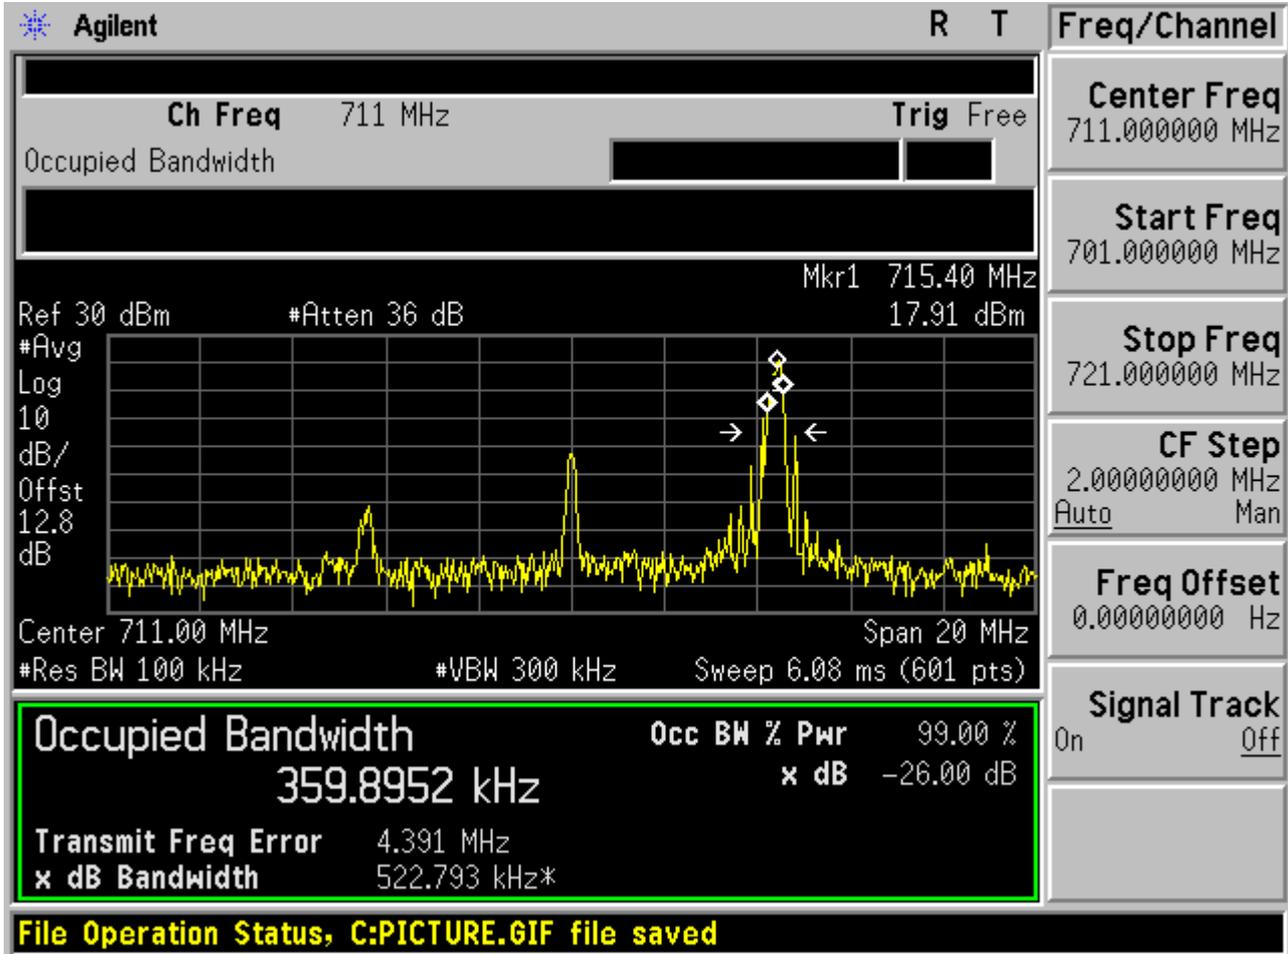




1.1.2.3.3 QPSK/non-1RB #mid/2

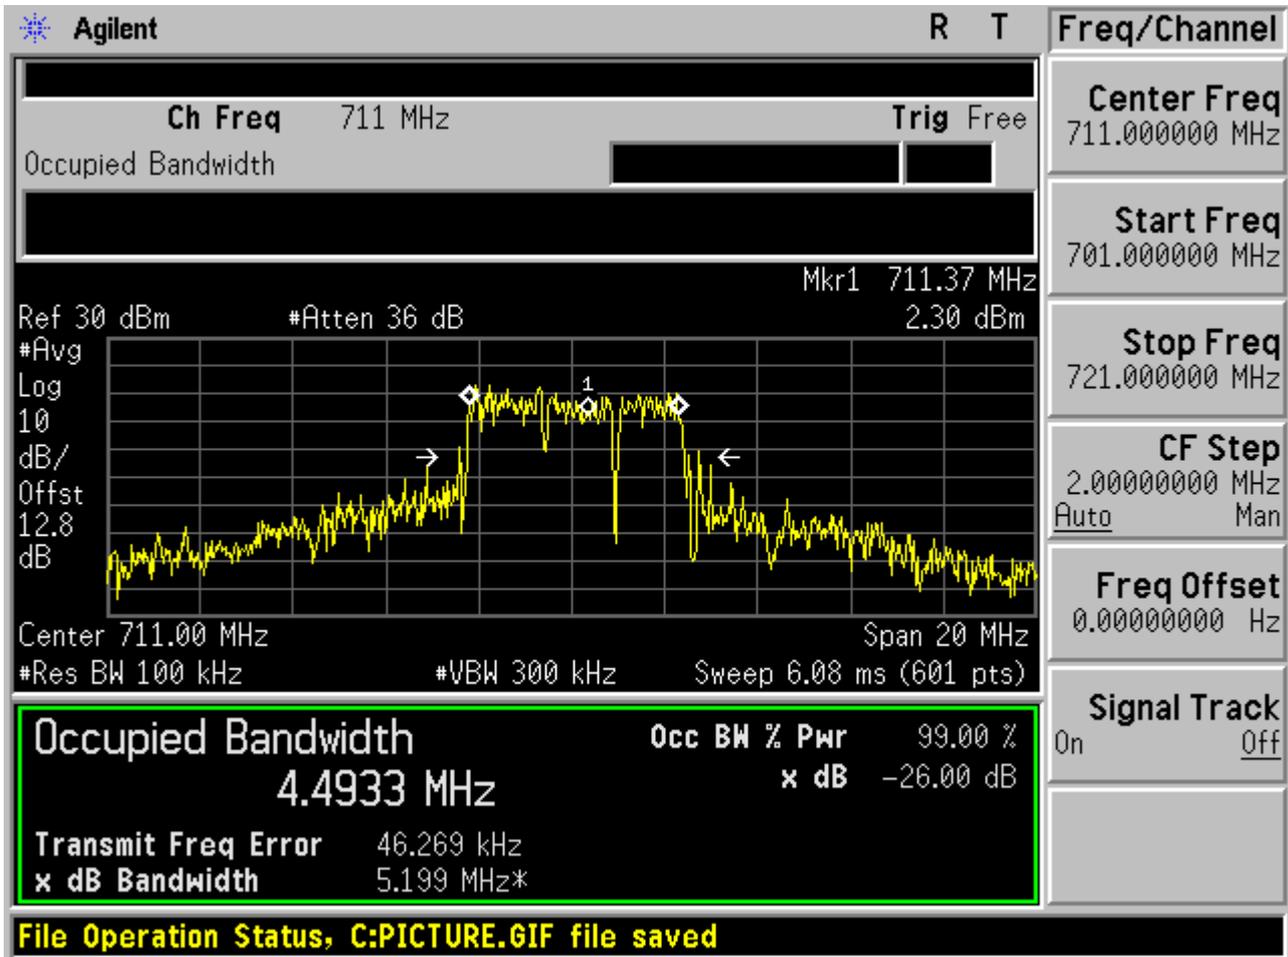



1.1.2.3.4 QPSK/full RBs

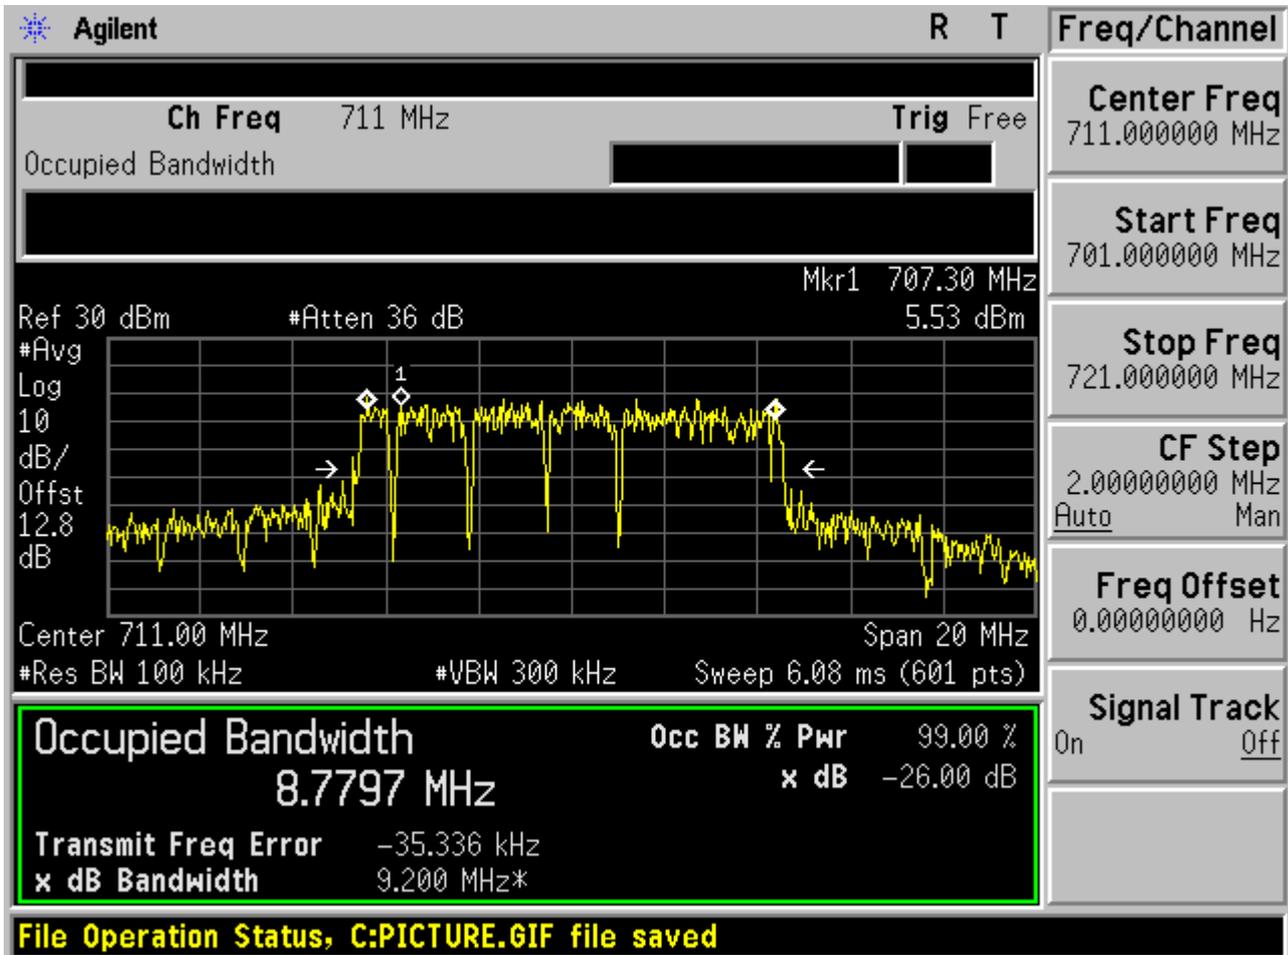




2 Test Mode=TM2

2.1.1 Channel Bandwidth = 5 MHz


2.1.1.1 Channel =B

2.1.1.1.1 16QAM/1RB # 0

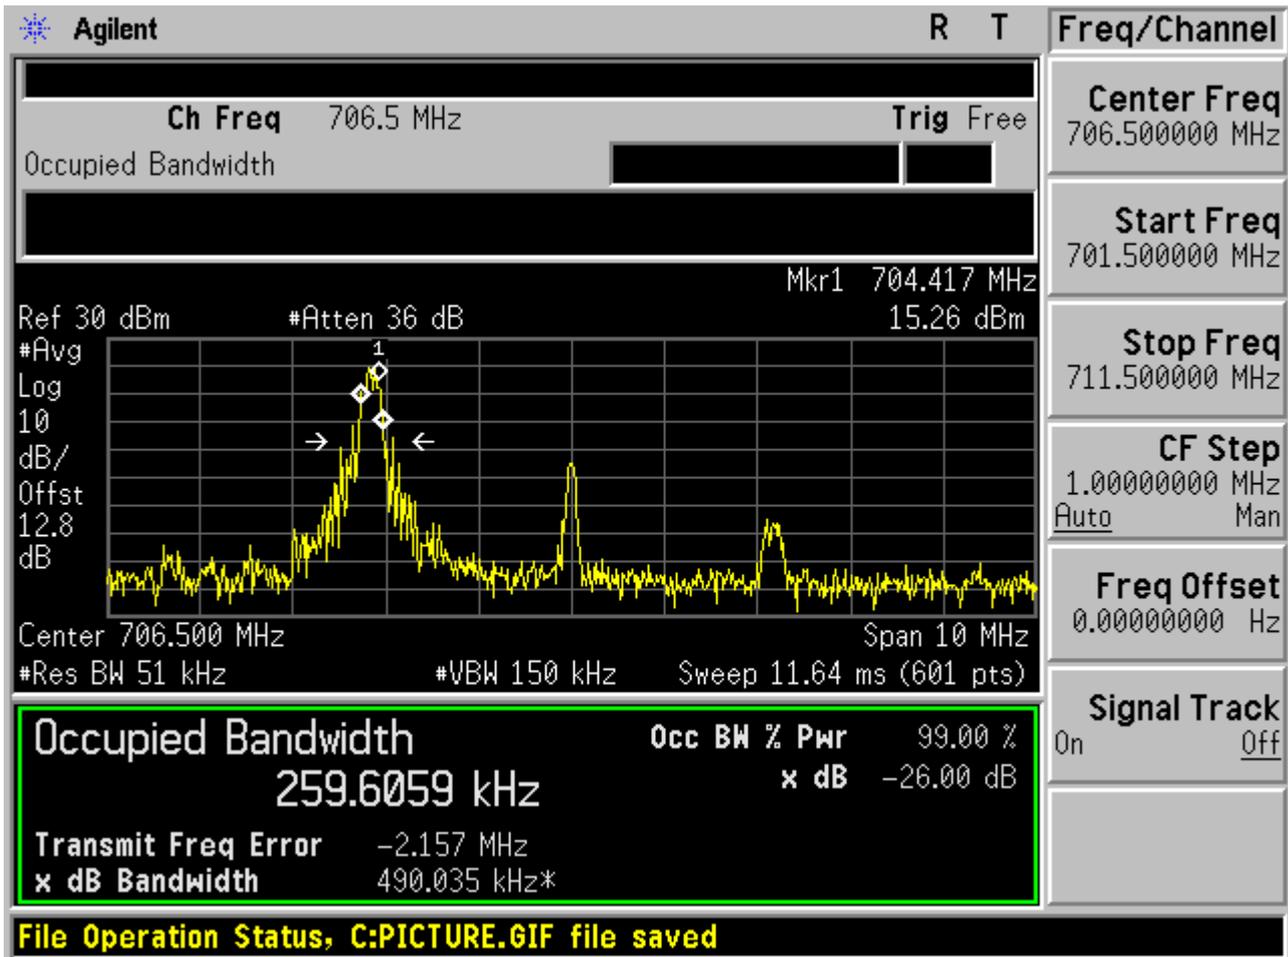




2.1.1.1.2 16QAM /1RB # max

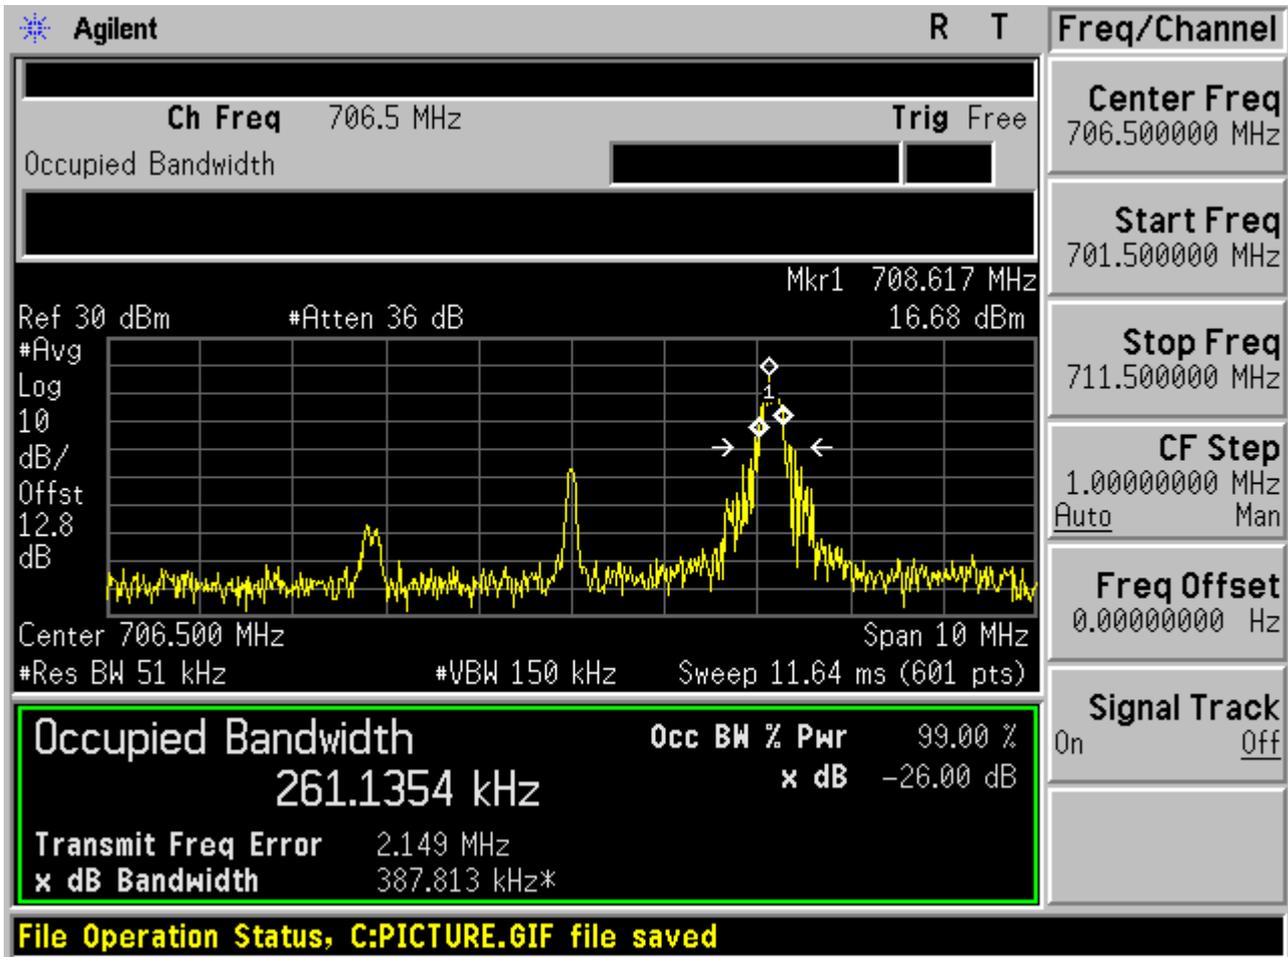




2.1.1.1.3 16QAM /non-1RB #mid/2

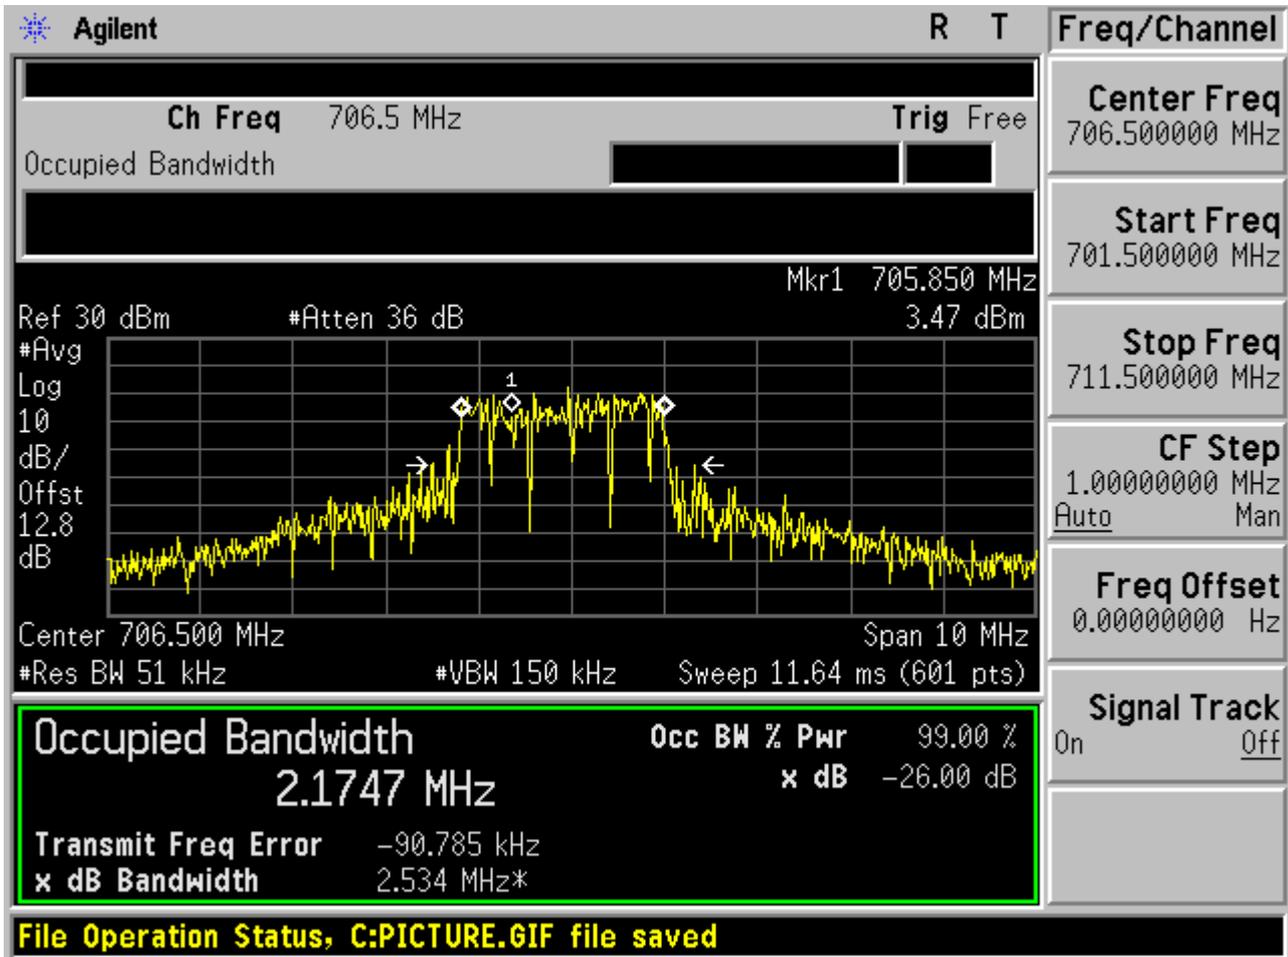




2.1.1.1.4 16QAM /full RBs

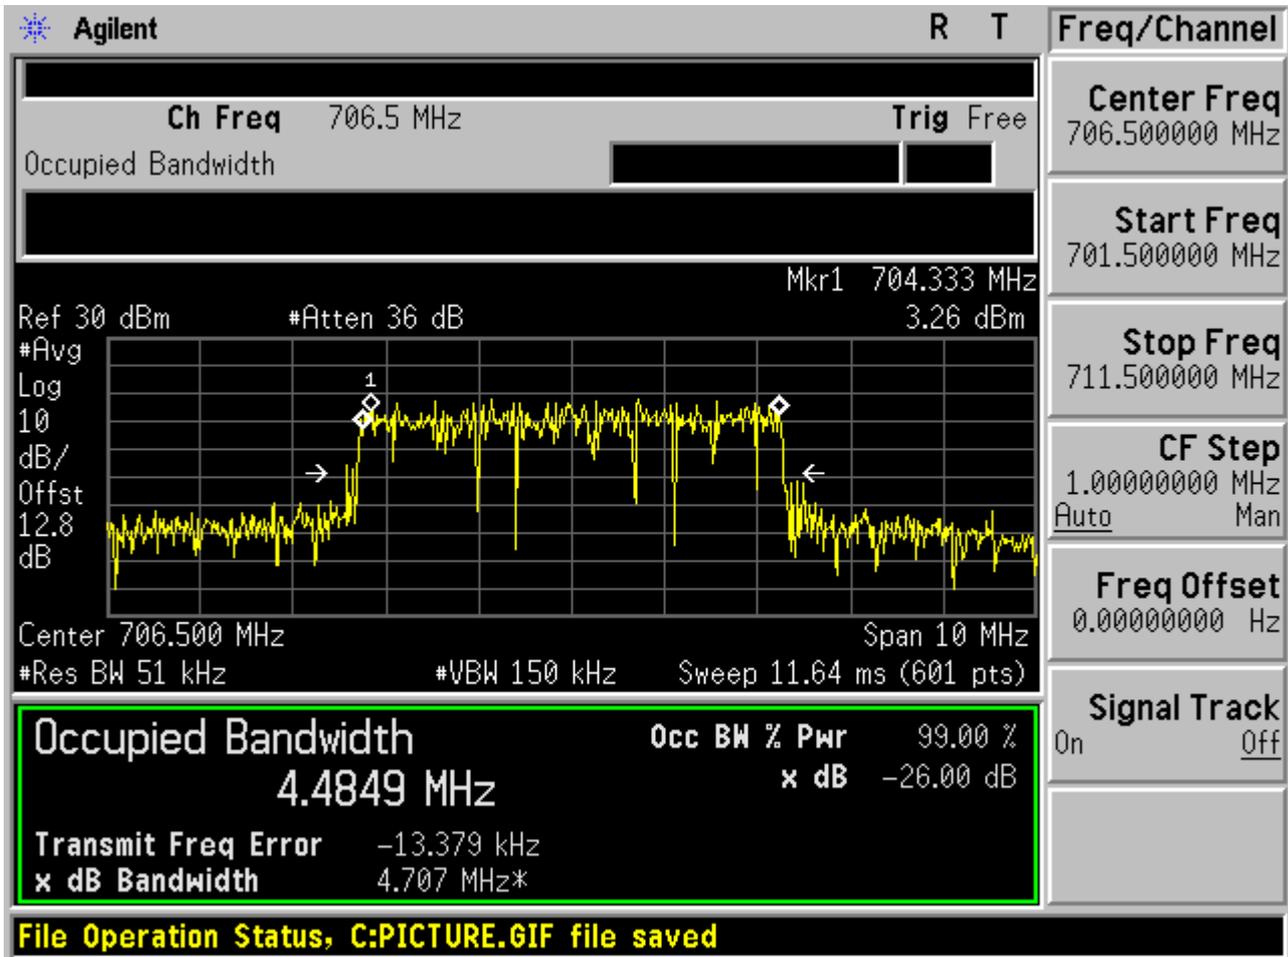




2.1.1.2 Channel =M

2.1.1.2.1 16QAM/1RB # 0

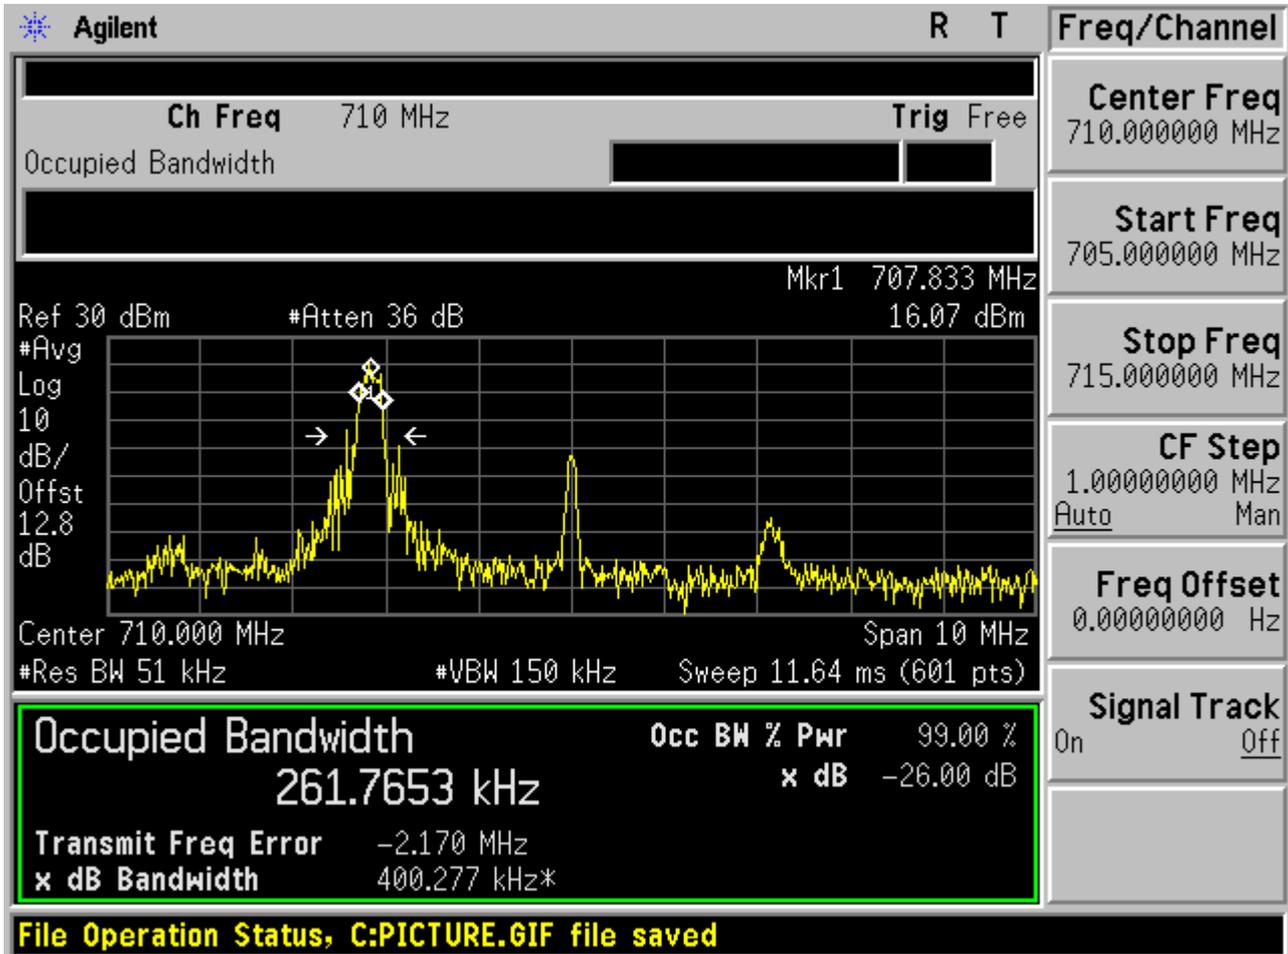




2.1.1.2.2 16QAM /1RB # max

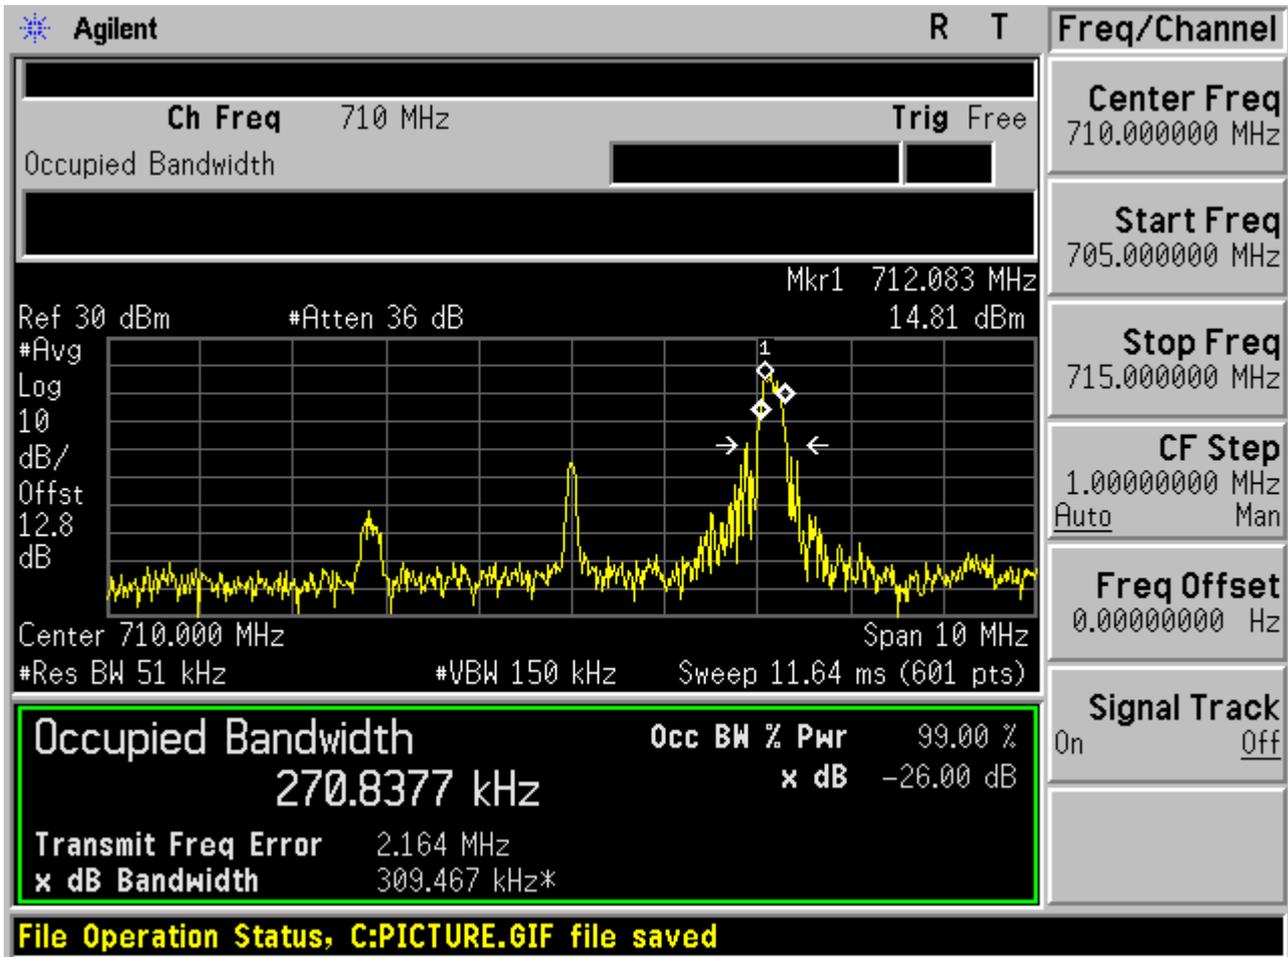




2.1.1.2.3 16QAM /non-1RB #mid/2

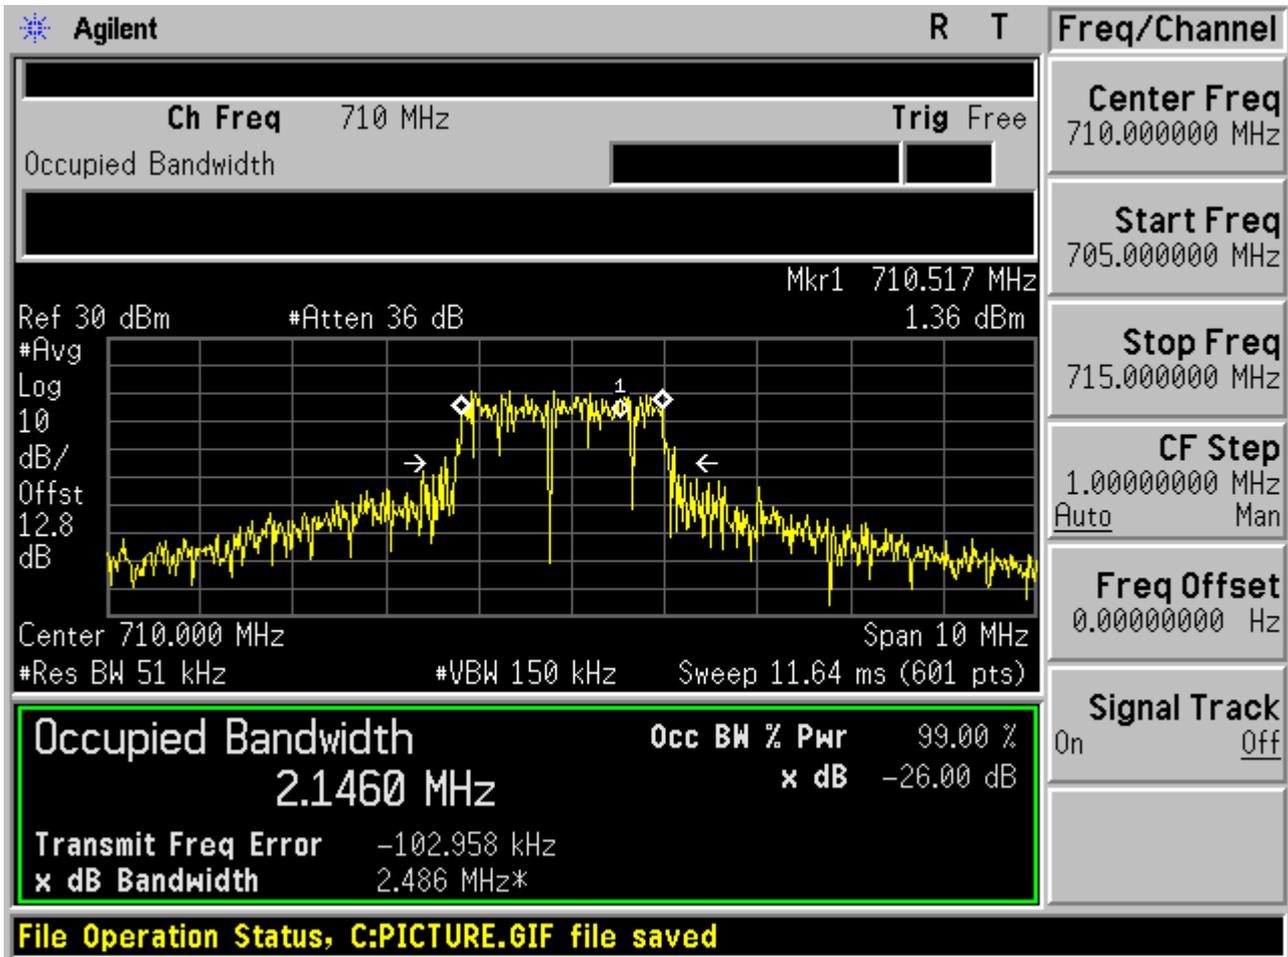




2.1.1.2.4 16QAM /full RBs

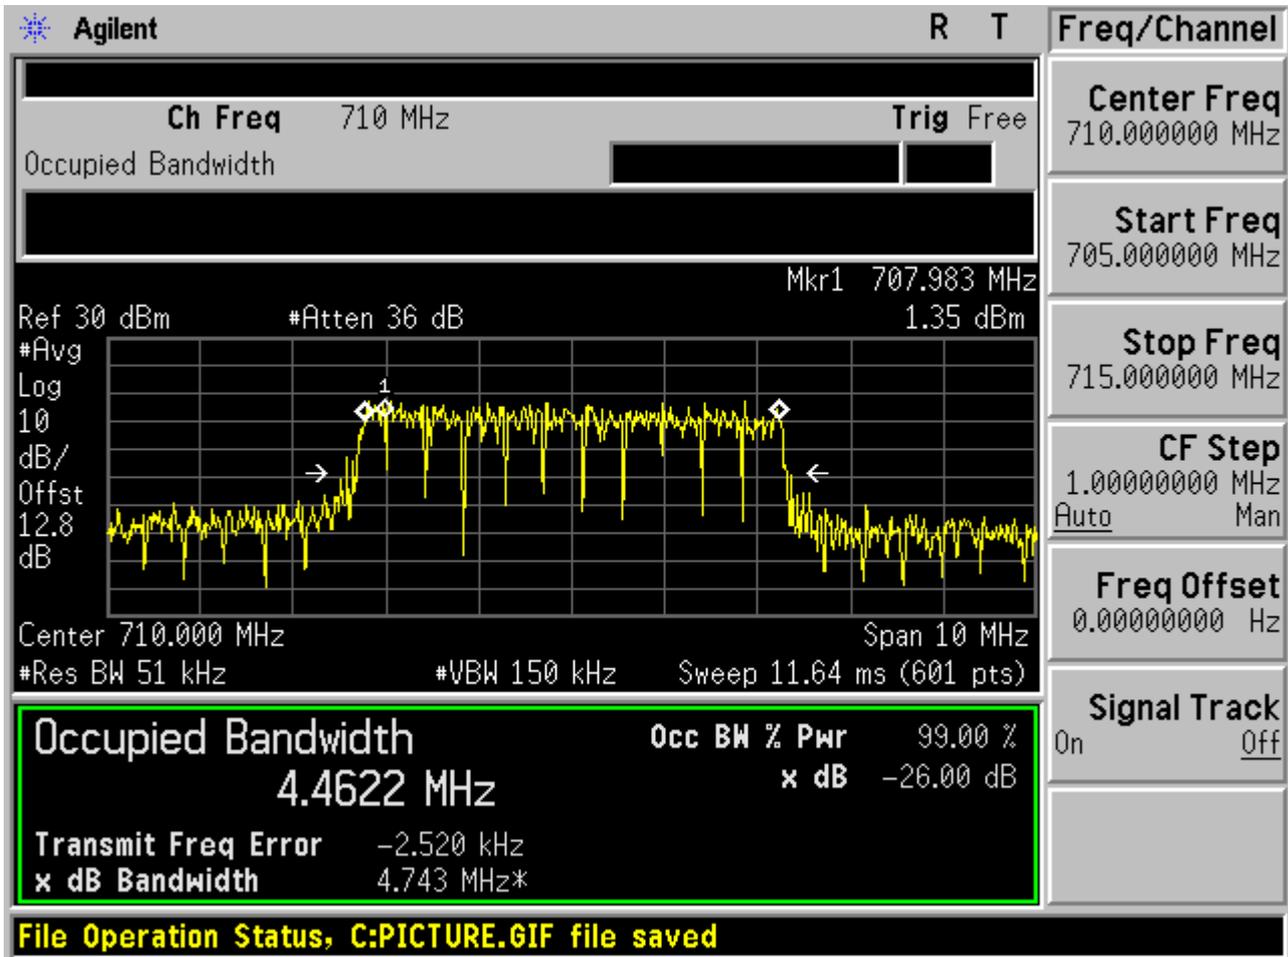




2.1.1.3 Channel =T

2.1.1.3.1 16QAM/1RB # 0

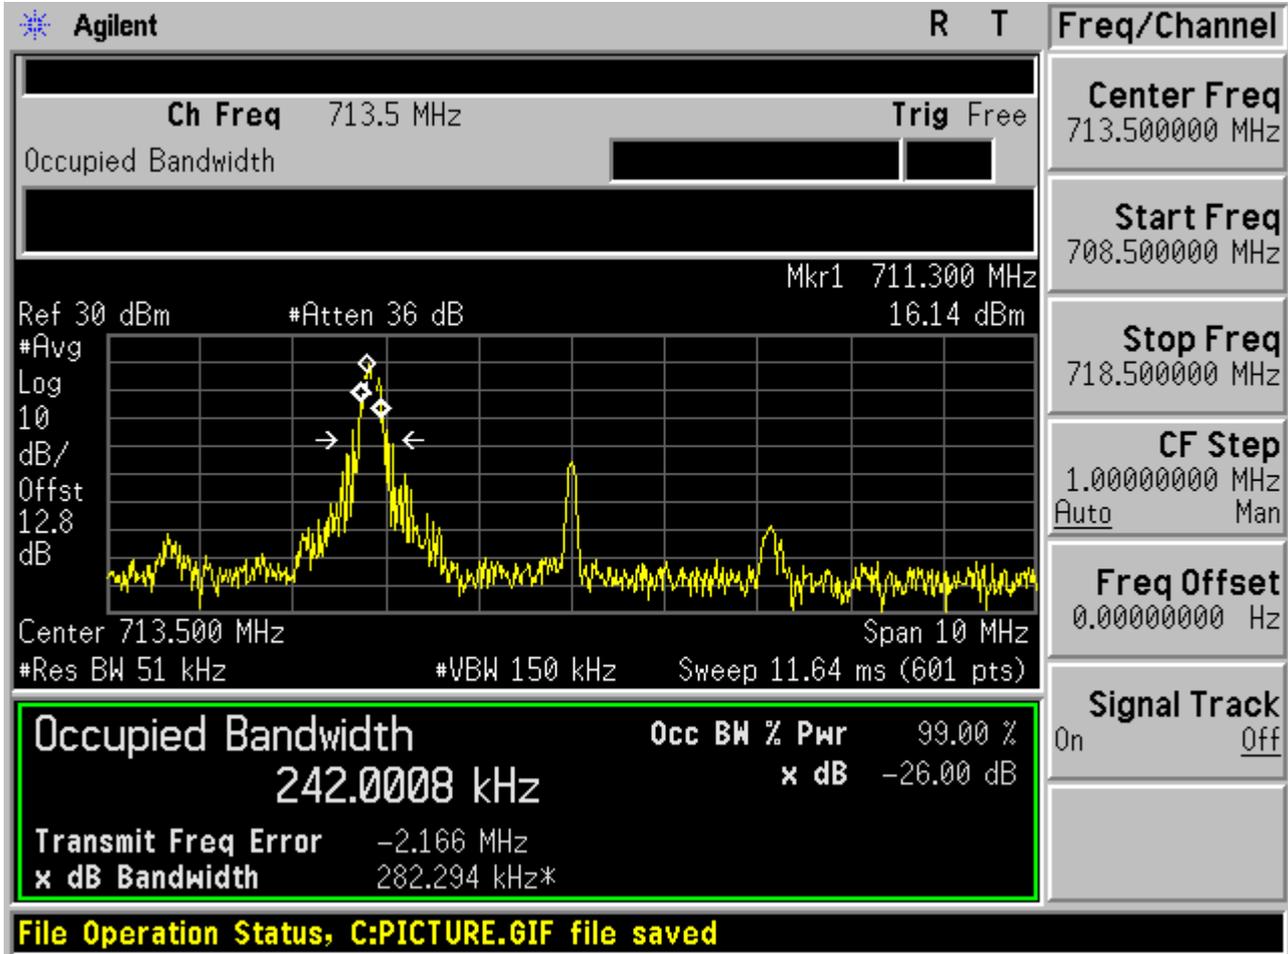




2.1.1.3.2 16QAM /1RB # max

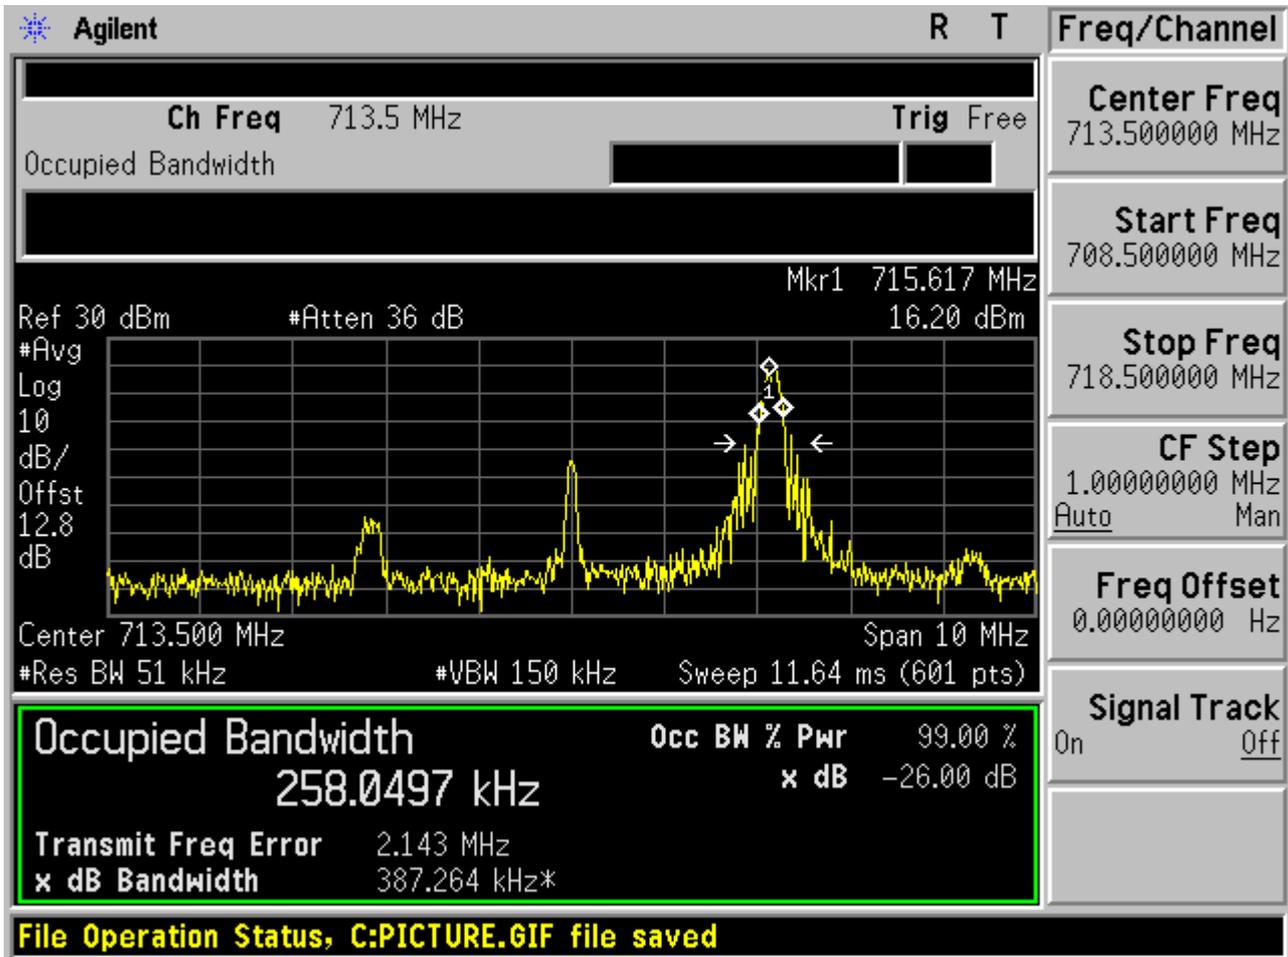




2.1.1.3.3 16QAM /non-1RB #mid/2

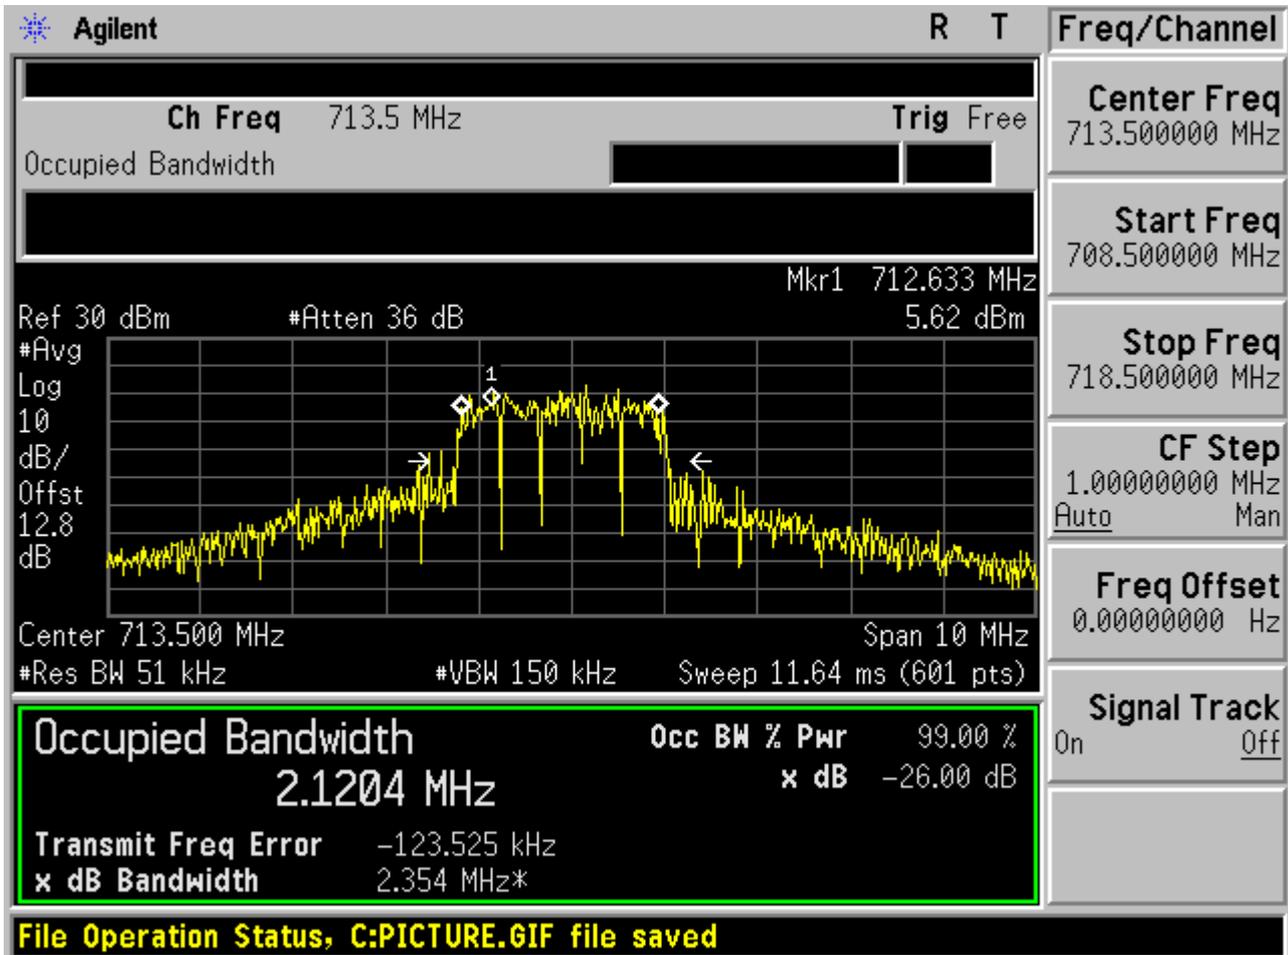



2.1.1.3.4 16QAM /full RBs

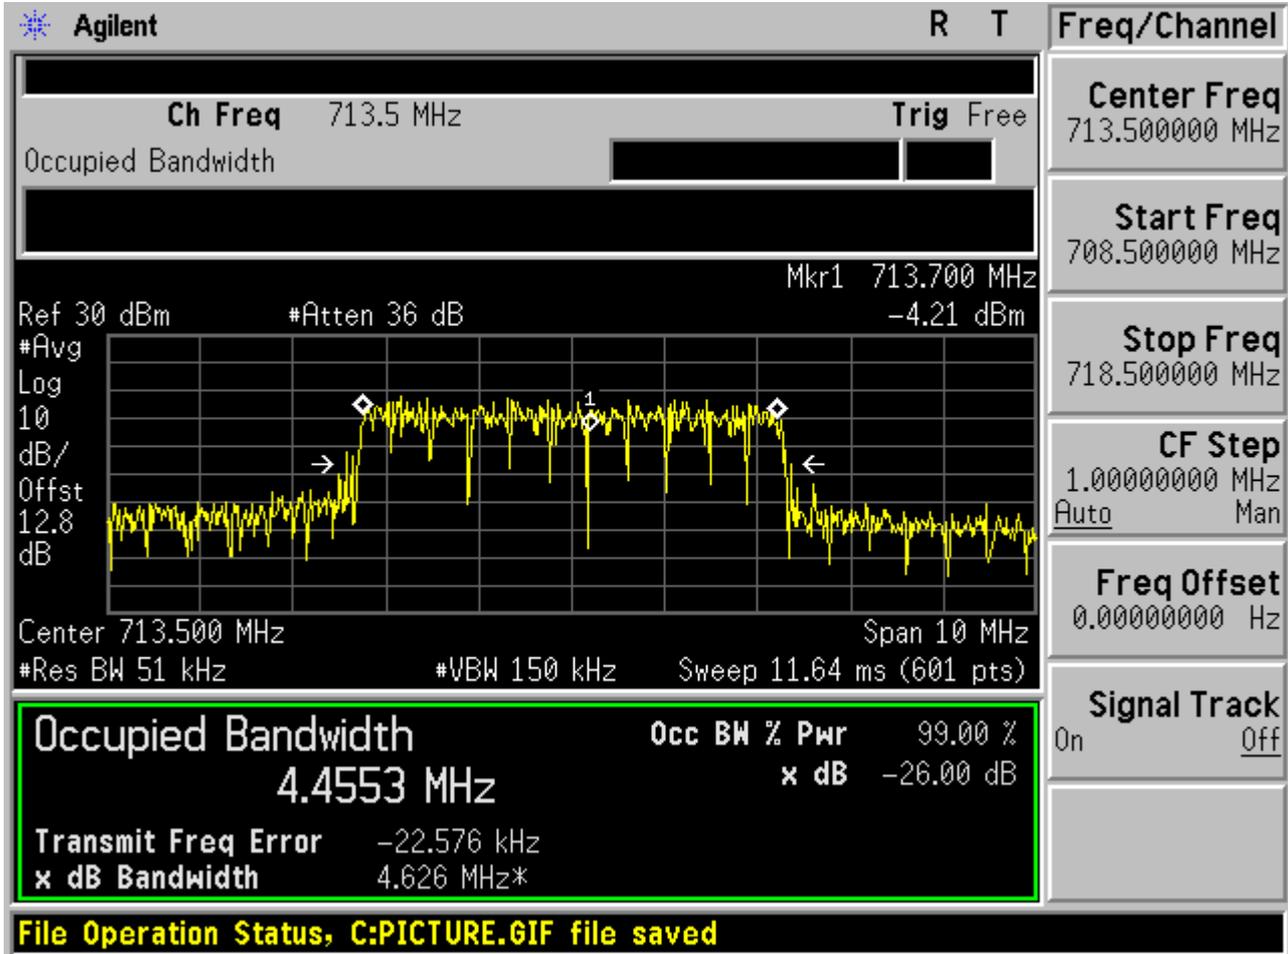




2.1.2 Channel Bandwidth = 10 MHz


2.1.2.1 Channel =B

2.1.2.1.1 16QAM/1RB # 0

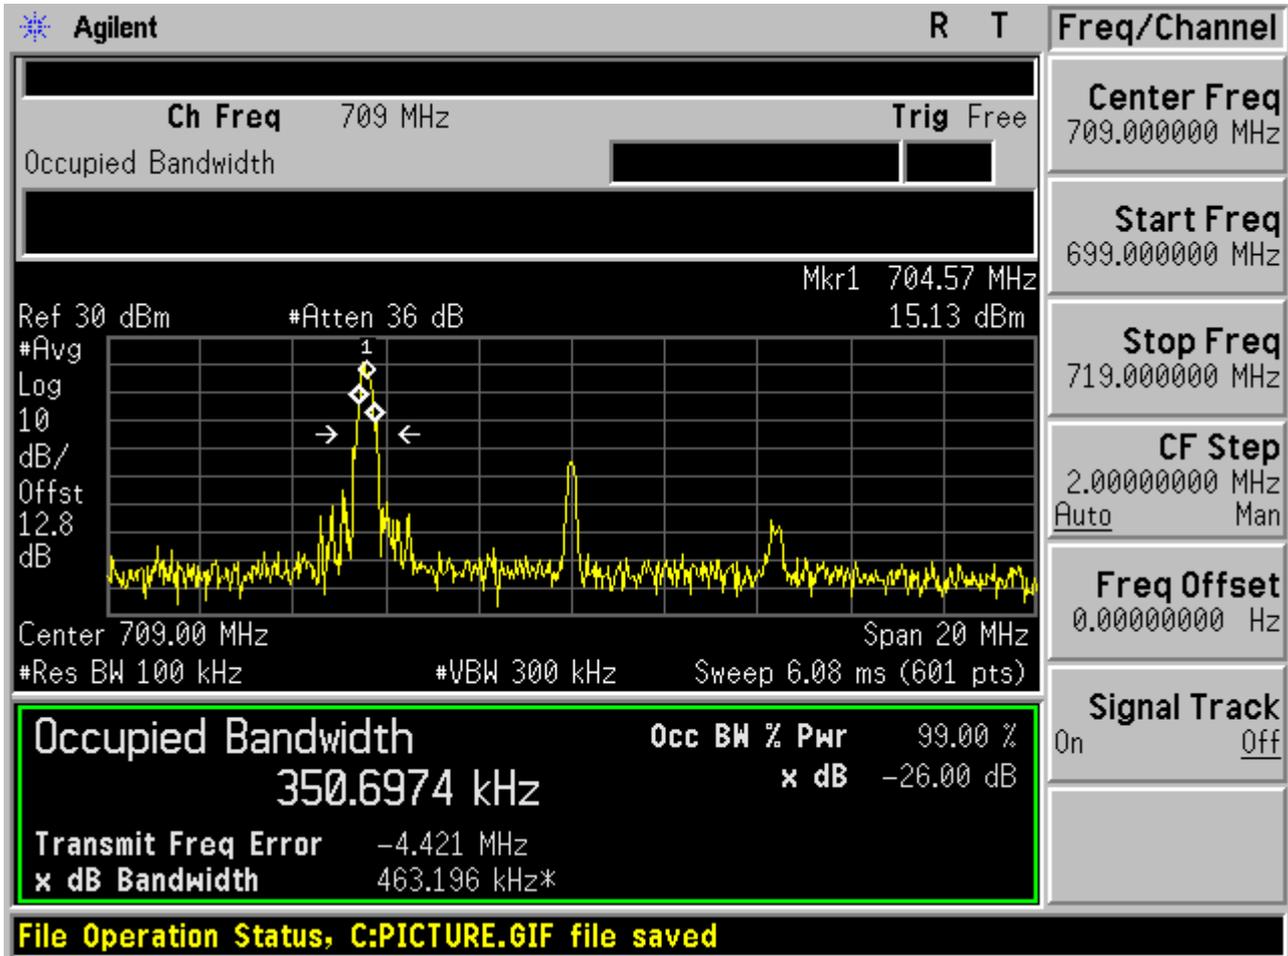




2.1.2.1.2 16QAM /1RB # max

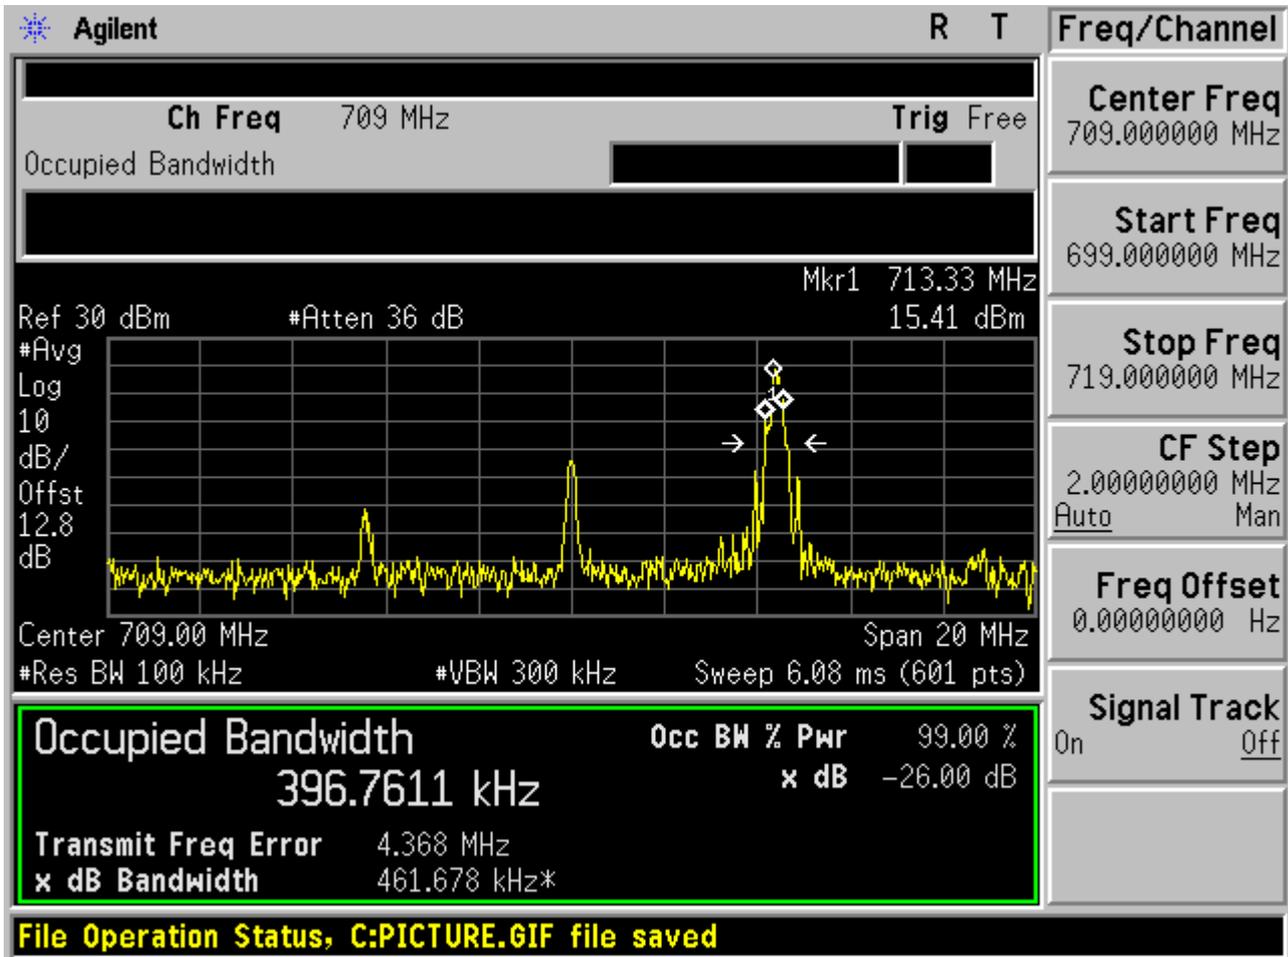




2.1.2.1.3 16QAM /non-1RB #mid/2

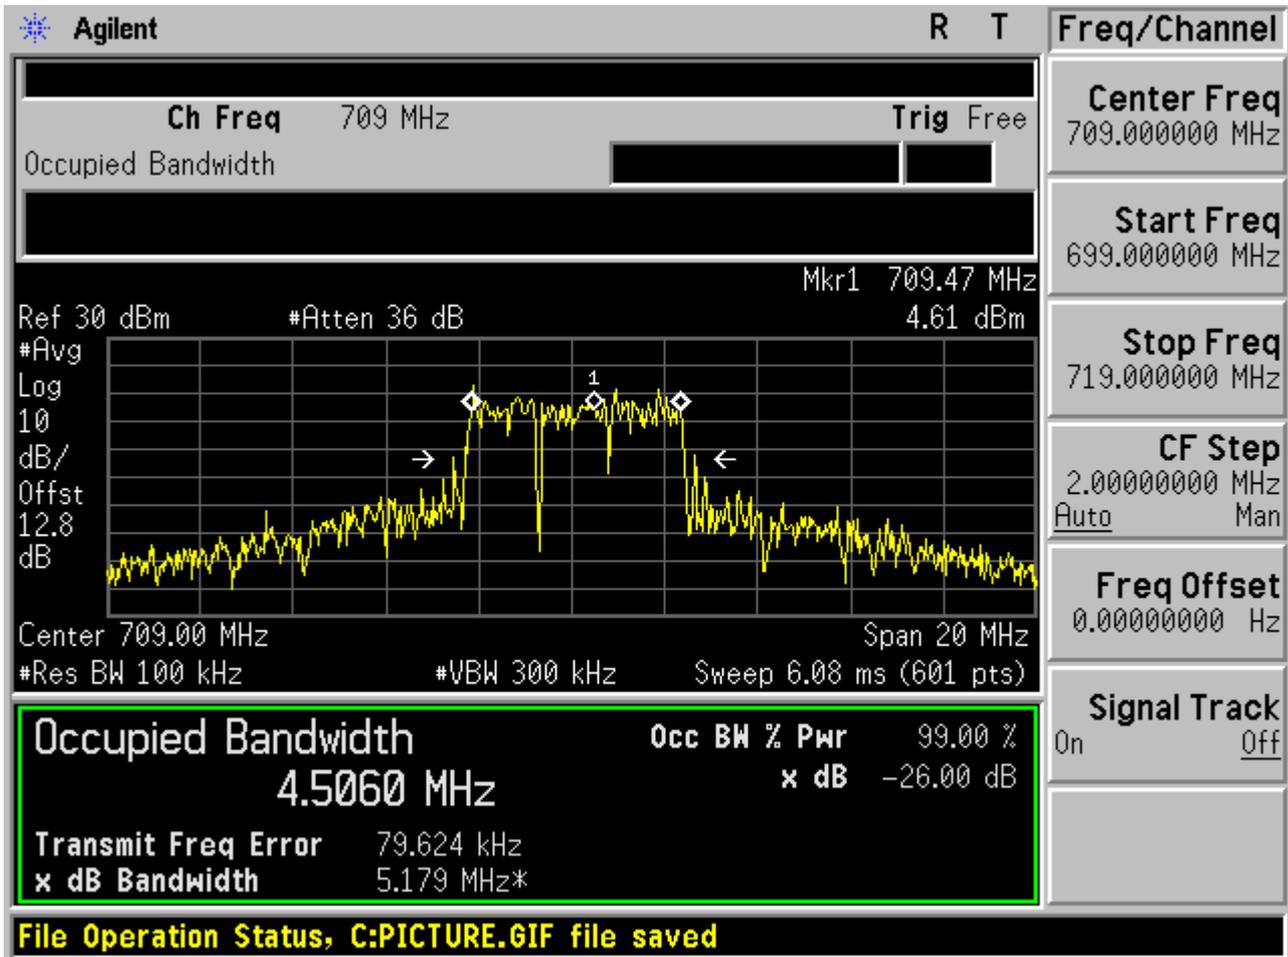




2.1.2.1.4 16QAM /full RBs

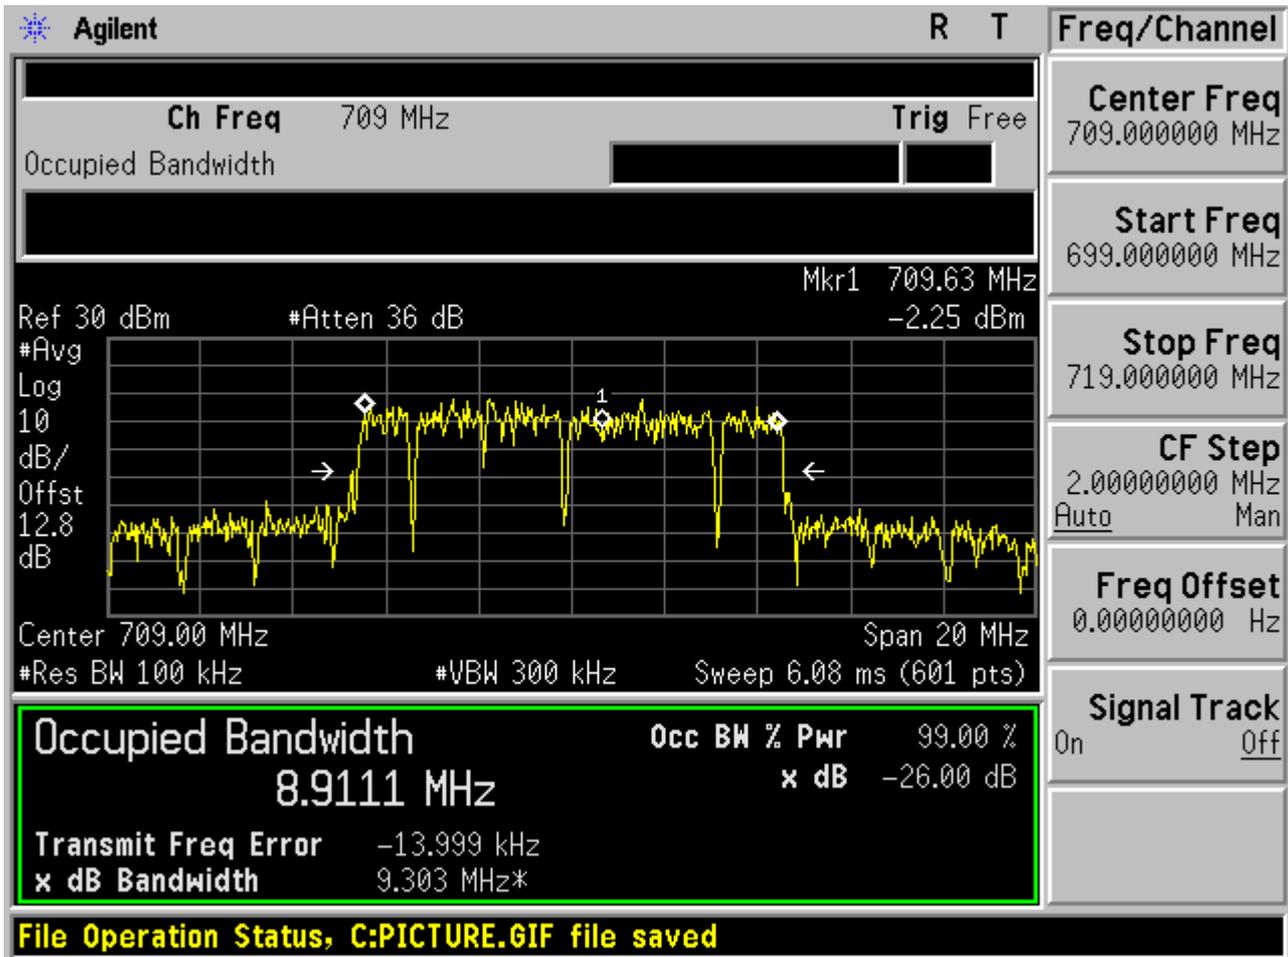




2.1.2.2 Channel =M

2.1.2.2.1 16QAM/1RB # 0

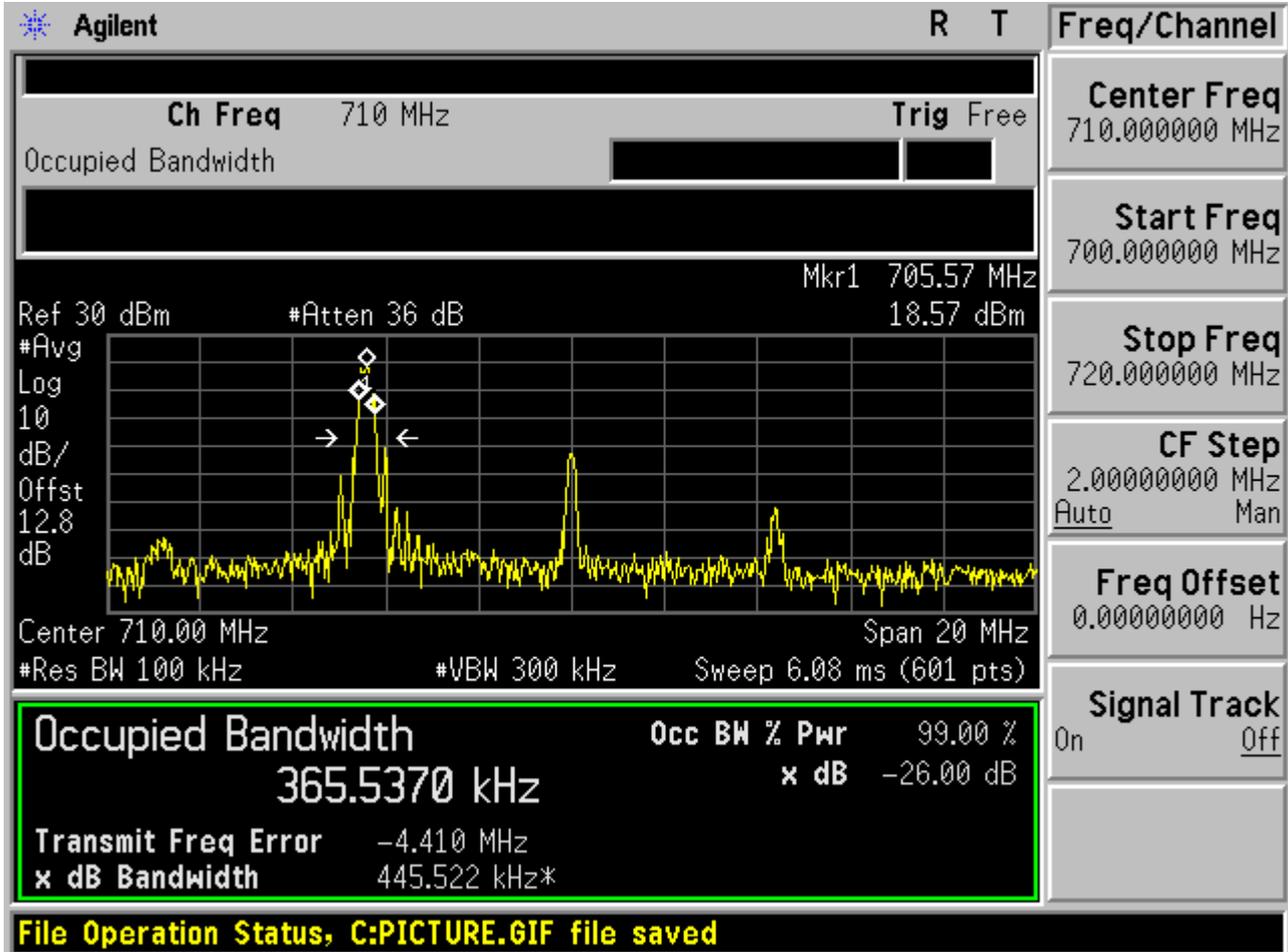




2.1.2.2.2 16QAM /1RB # max

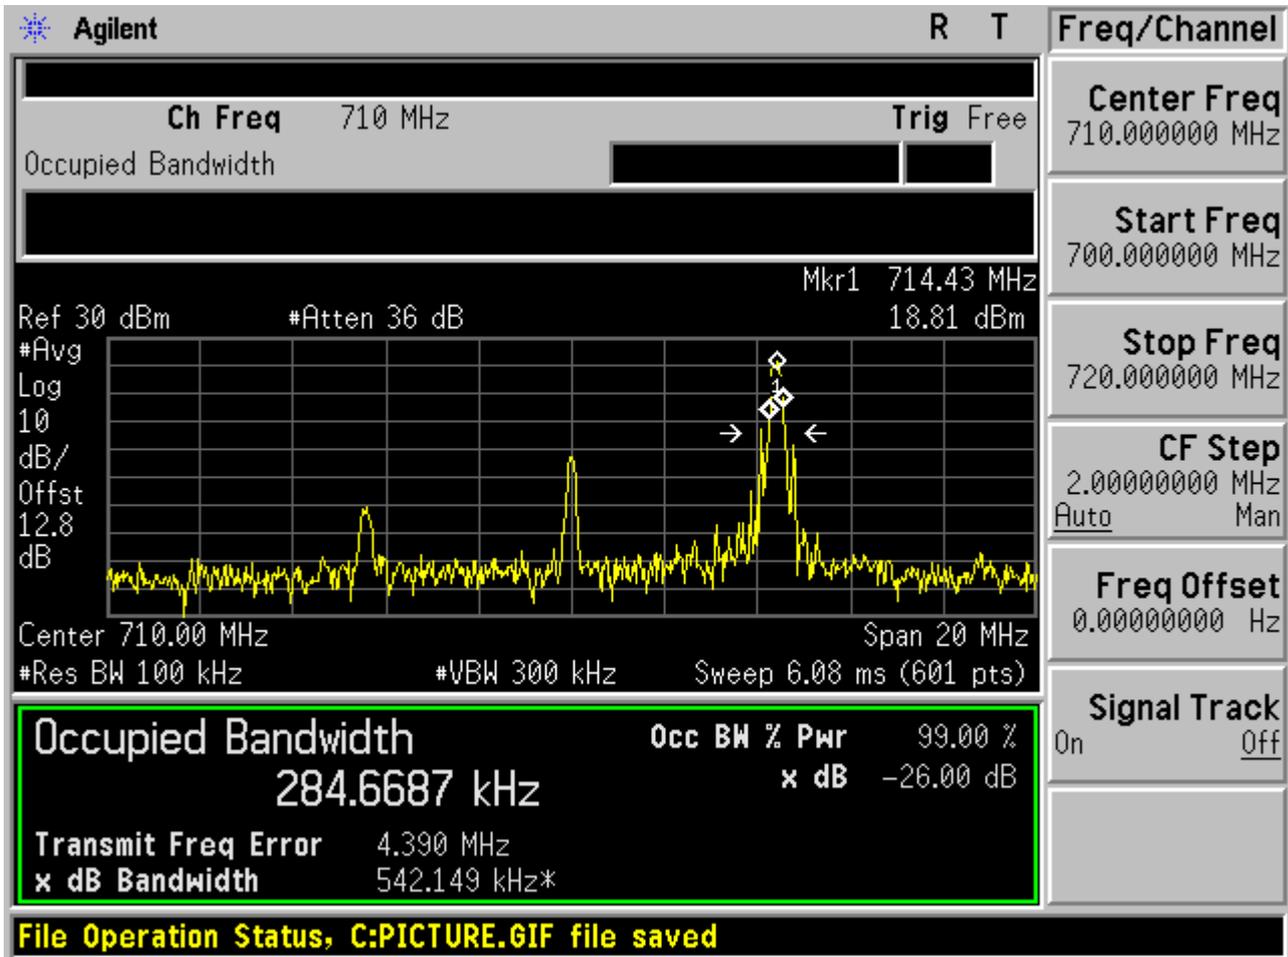




2.1.2.2.3 16QAM /non-1RB #mid/2

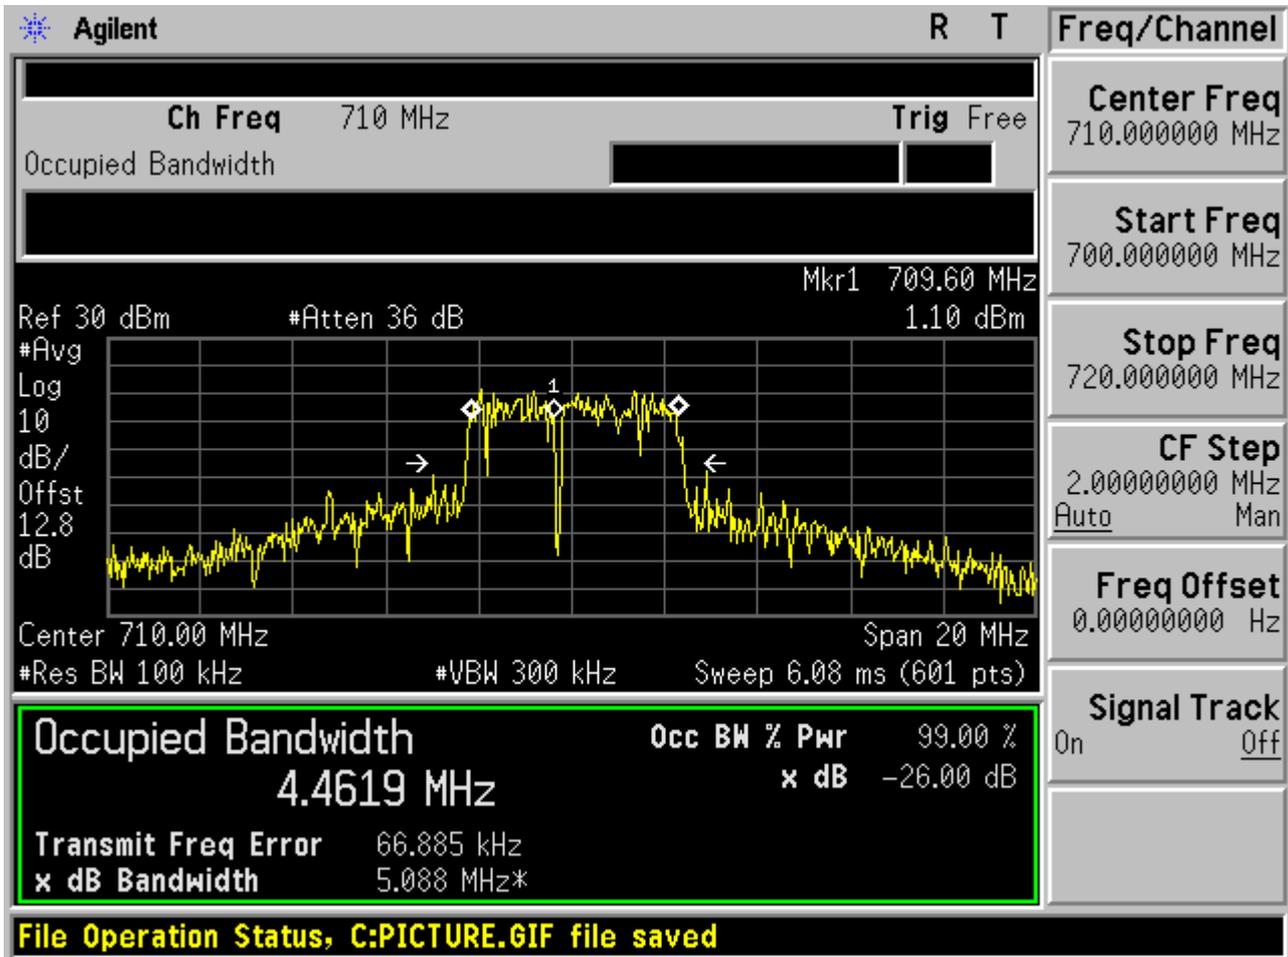




2.1.2.2.4 16QAM /full RBs

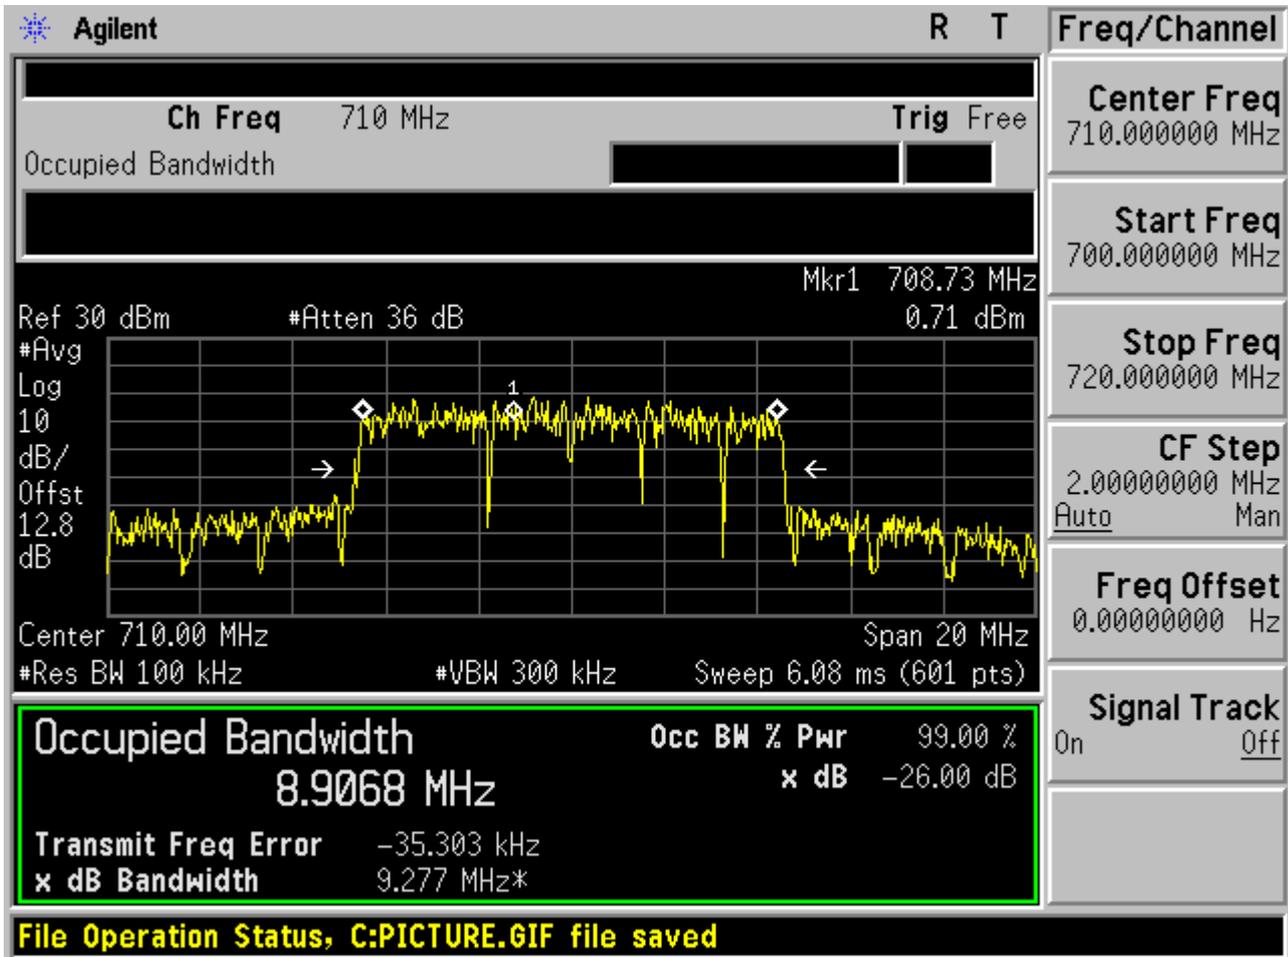




2.1.2.3 Channel =T

2.1.2.3.1 16QAM/1RB # 0

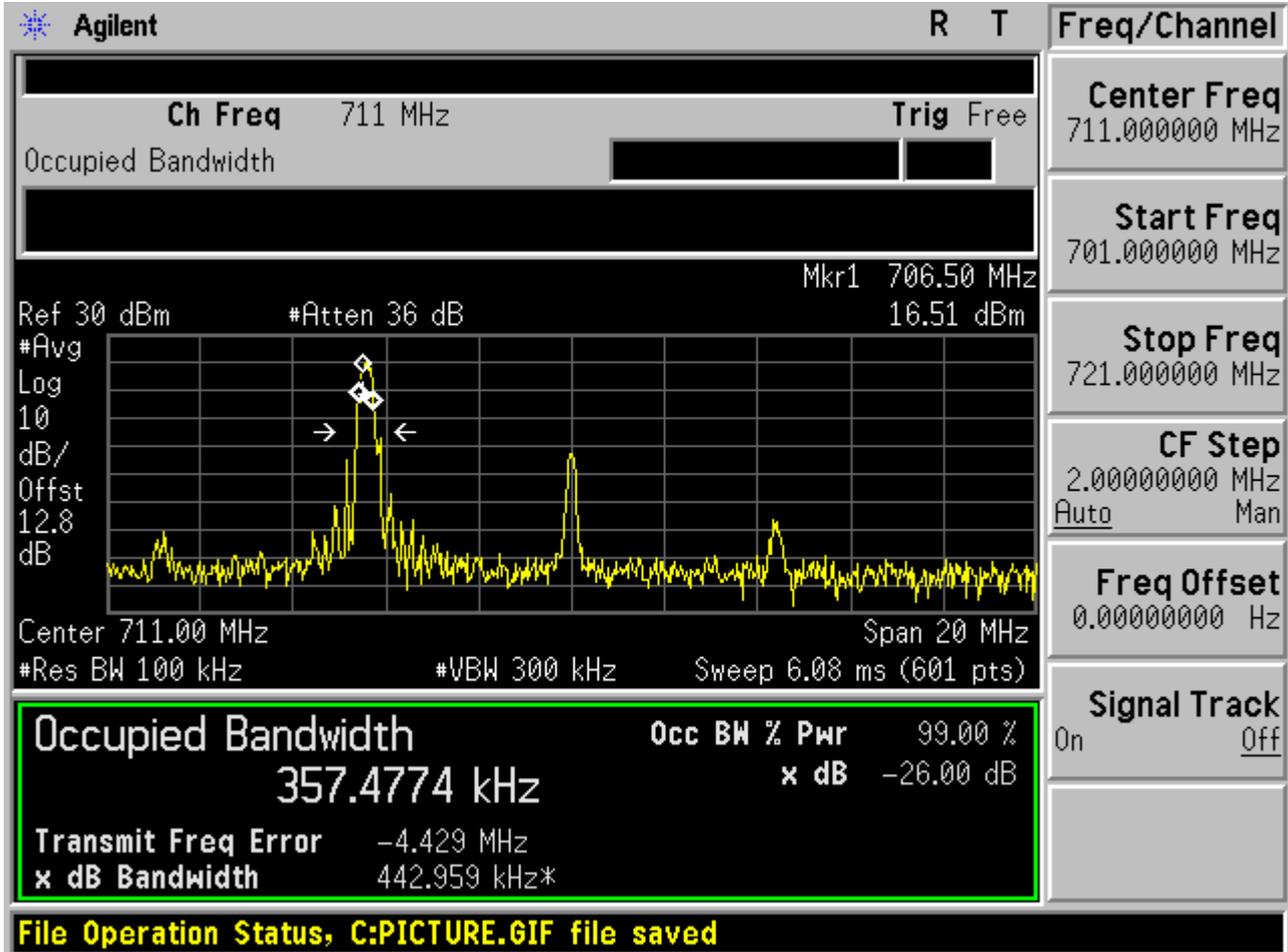




2.1.2.3.2 16QAM /1RB # max

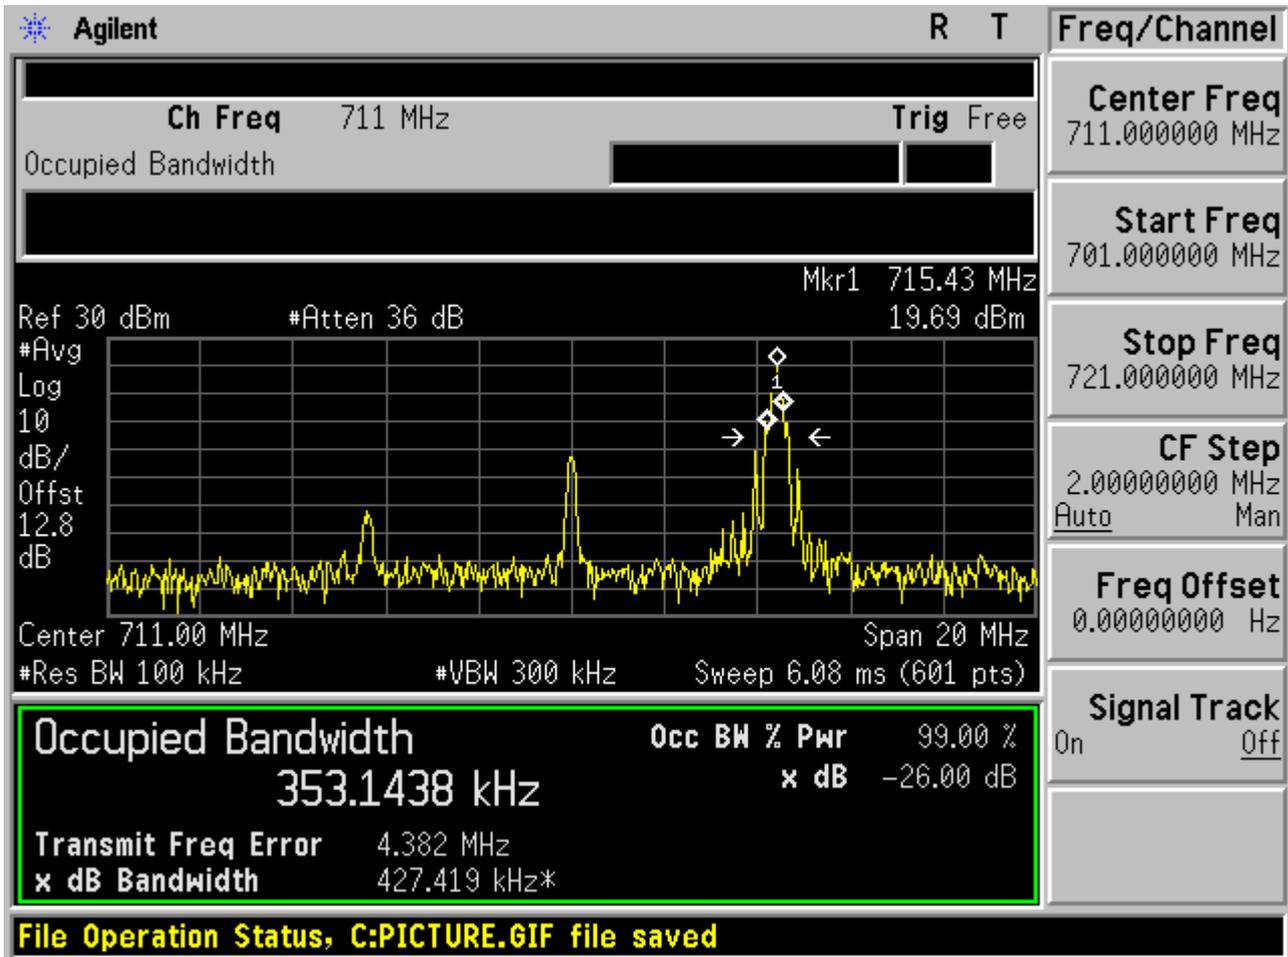




2.1.2.3.3 16QAM /non-1RB #mid/2

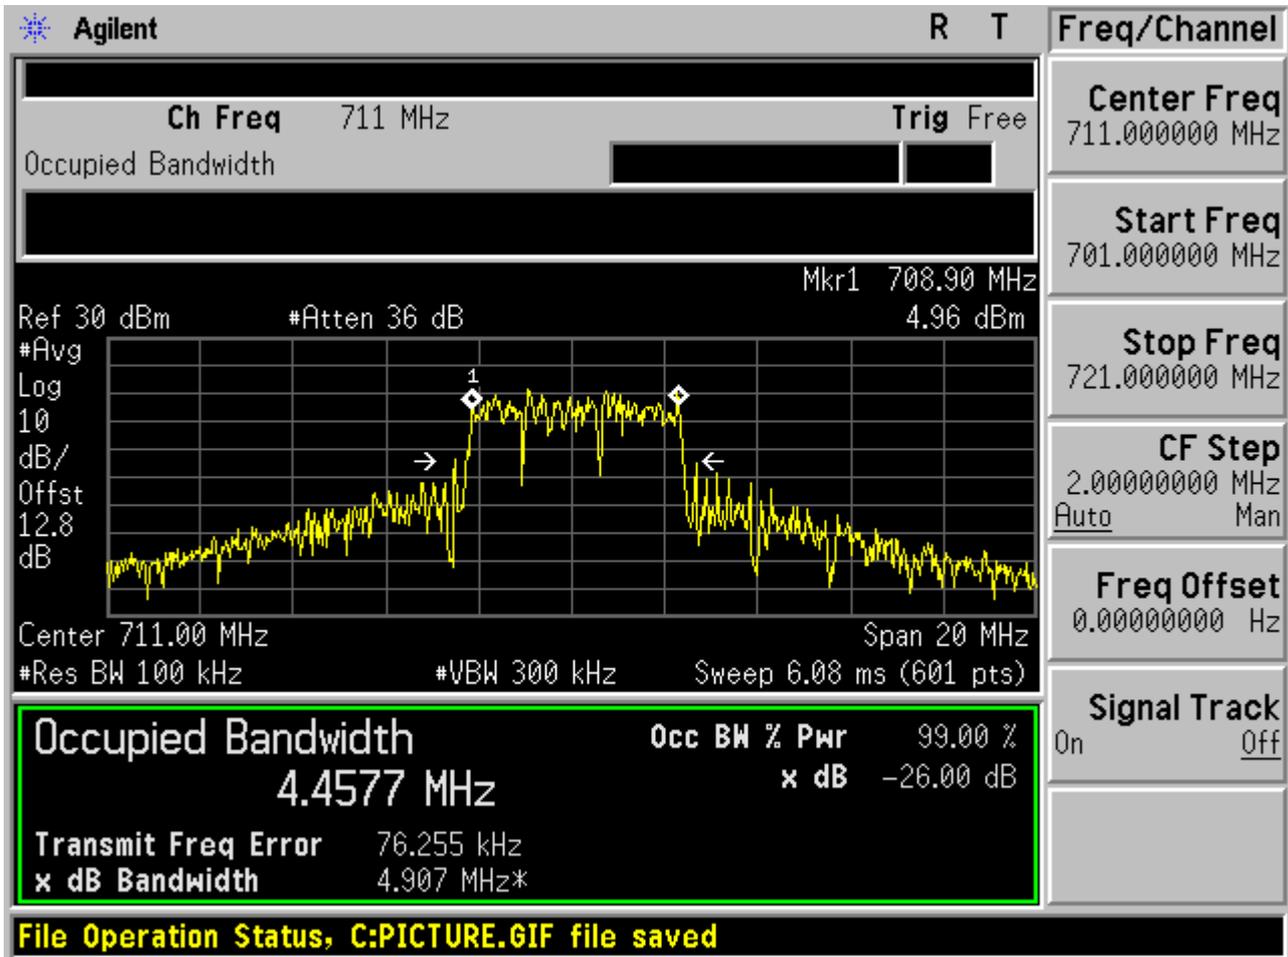



2.1.2.3.4 16QAM /full RBs

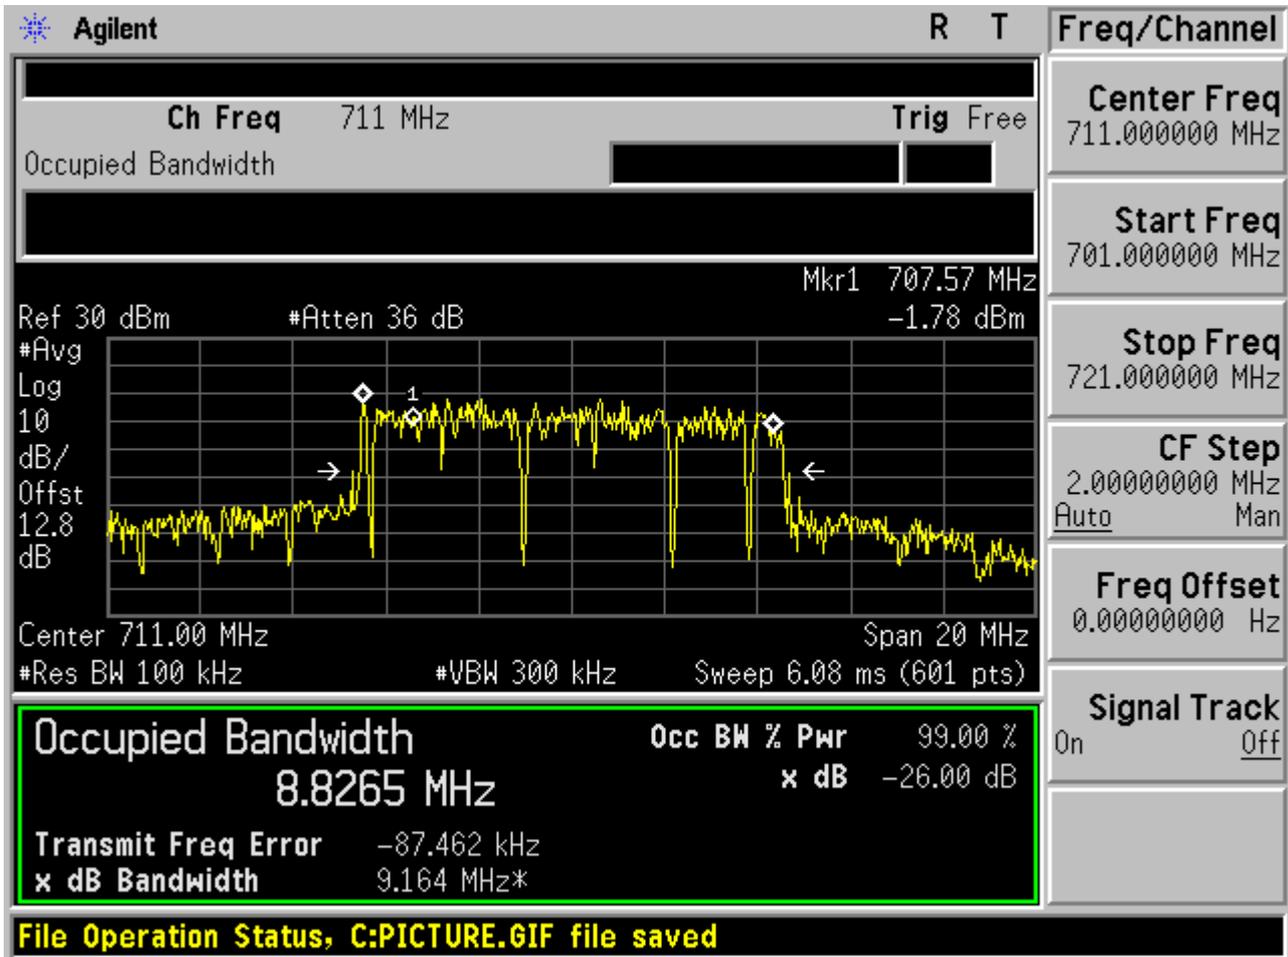

-----END-----



Appendix D

Band Edges Compliance According to FCC Part 2.1051 & 27.53(g)



TABLE OF CONTENTS

TABLE OF CONTENTS.....	2
1 FOR BAND 17	3
1.1 TEST MODE=TM1.....	3
1.1.1 Channel Bandwidth = 5 MHz.....	3
1.1.1.1 Channel= B.....	3
1.1.1.1.1 QPSK/1RB # 0	3
1.1.1.1.2 QPSK/1RB # max.....	4
1.1.1.1.3 QPSK/non-1RB #mid/2	5
1.1.1.1.4 QPSK/full RBs.....	6
1.1.1.2 Channel= T	7
1.1.1.2.1 QPSK/1RB # 0	7
1.1.1.2.2 QPSK/1RB # max.....	8
1.1.1.2.3 QPSK/non-1RB #mid/2	9
1.1.1.2.4 QPSK/full RBs.....	10
1.1.2 Channel Bandwidth = 10 MHz.....	11
1.1.2.1 Channel= B.....	11
1.1.2.1.1 QPSK/1RB # 0	11
1.1.2.1.2 QPSK/1RB # max.....	12
1.1.2.1.3 QPSK/non-1RB #mid/2	13
1.1.2.1.4 QPSK/full RBs.....	14
1.1.2.2 Channel= T	15
1.1.2.2.1 QPSK/1RB # 0	15
1.1.2.2.2 QPSK/1RB # max.....	16
1.1.2.2.3 QPSK/non-1RB #mid/2	17
1.1.2.2.4 QPSK/full RBs.....	18
1.2 TEST MODE=TM2.....	19
1.2.1 Channel Bandwidth = 5 MHz.....	19
1.2.1.1 Channel= B.....	19
1.2.1.1.1 16QAM/1RB #0.....	19
1.2.1.1.2 16QAM/1RB #max.....	20
1.2.1.1.3 16QAM / non-1RB #mid/2.....	21
1.2.1.1.4 16QAM /full RBs.....	22
1.2.1.2 Channel= T	23
1.2.1.2.1 16QAM /1RB #0.....	23
1.2.1.2.2 16QAM /1RB #max.....	24
1.2.1.2.3 16QAM / non-1RB #mid/2.....	25
1.2.1.2.4 16QAM /full RBs.....	26
1.2.2 Channel Bandwidth = 10 MHz.....	27
1.2.2.1 Channel= B.....	27
1.2.2.1.1 16QAM/1RB #0.....	27
1.2.2.1.2 16QAM/1RB #max.....	28
1.2.2.1.3 16QAM / non-1RB #mid/2.....	29
1.2.2.1.4 16QAM /full RBs.....	30
1.2.2.2 Channel= T	31
1.2.2.2.1 16QAM /1RB #0.....	31
1.2.2.2.2 16QAM /1RB #max.....	32
1.2.2.2.3 16QAM / non-1RB #mid/2.....	33
1.2.2.2.4 16QAM /full RBs.....	34




1 For Band 17

1.1 Test Mode=TM1

1.1.1 Channel Bandwidth = 5 MHz


1.1.1.1 Channel= B

1.1.1.1.1 QPSK/1RB # 0

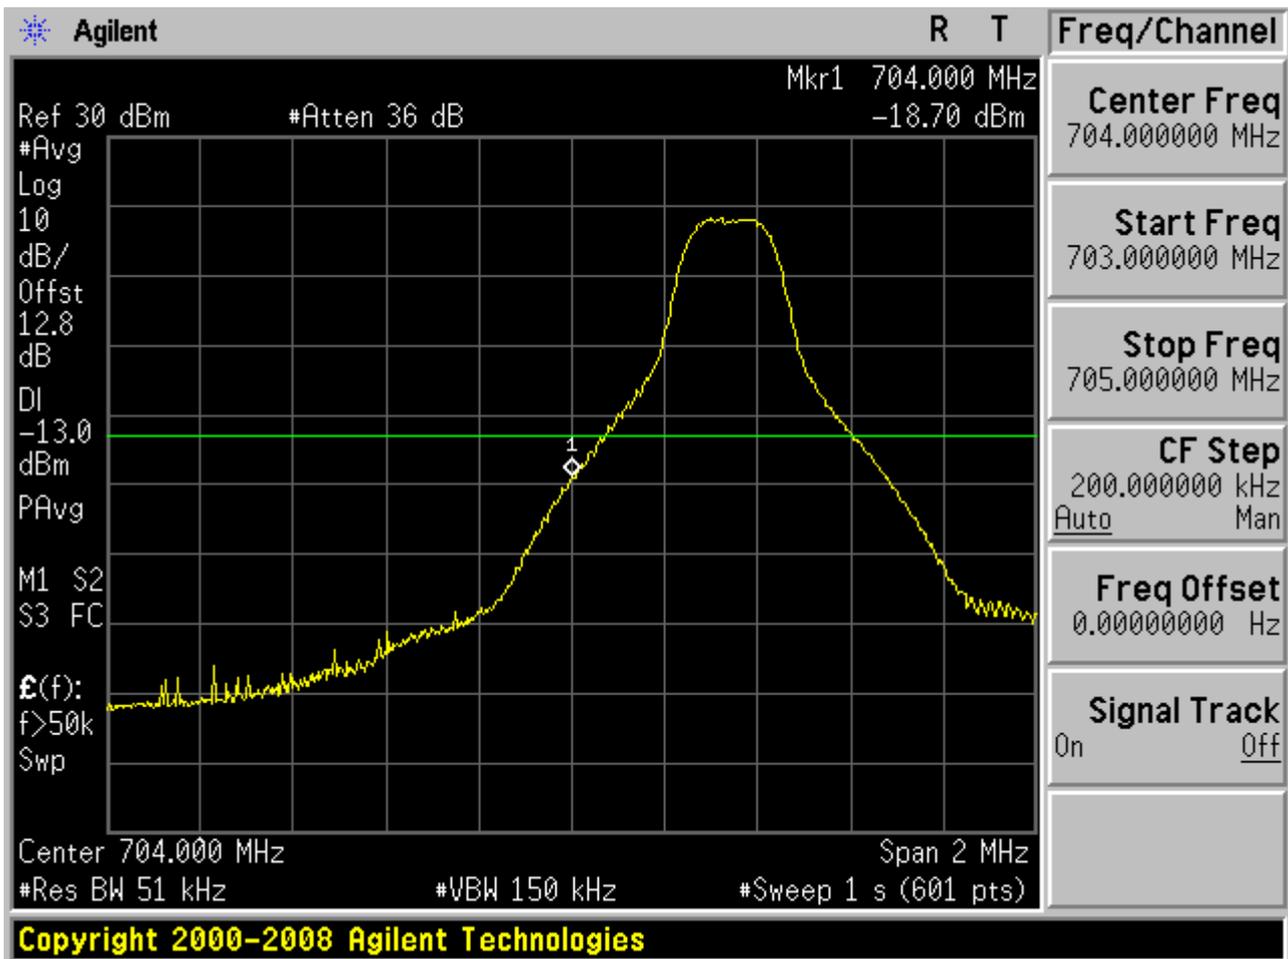




1.1.1.1.2 QPSK/1RB # max

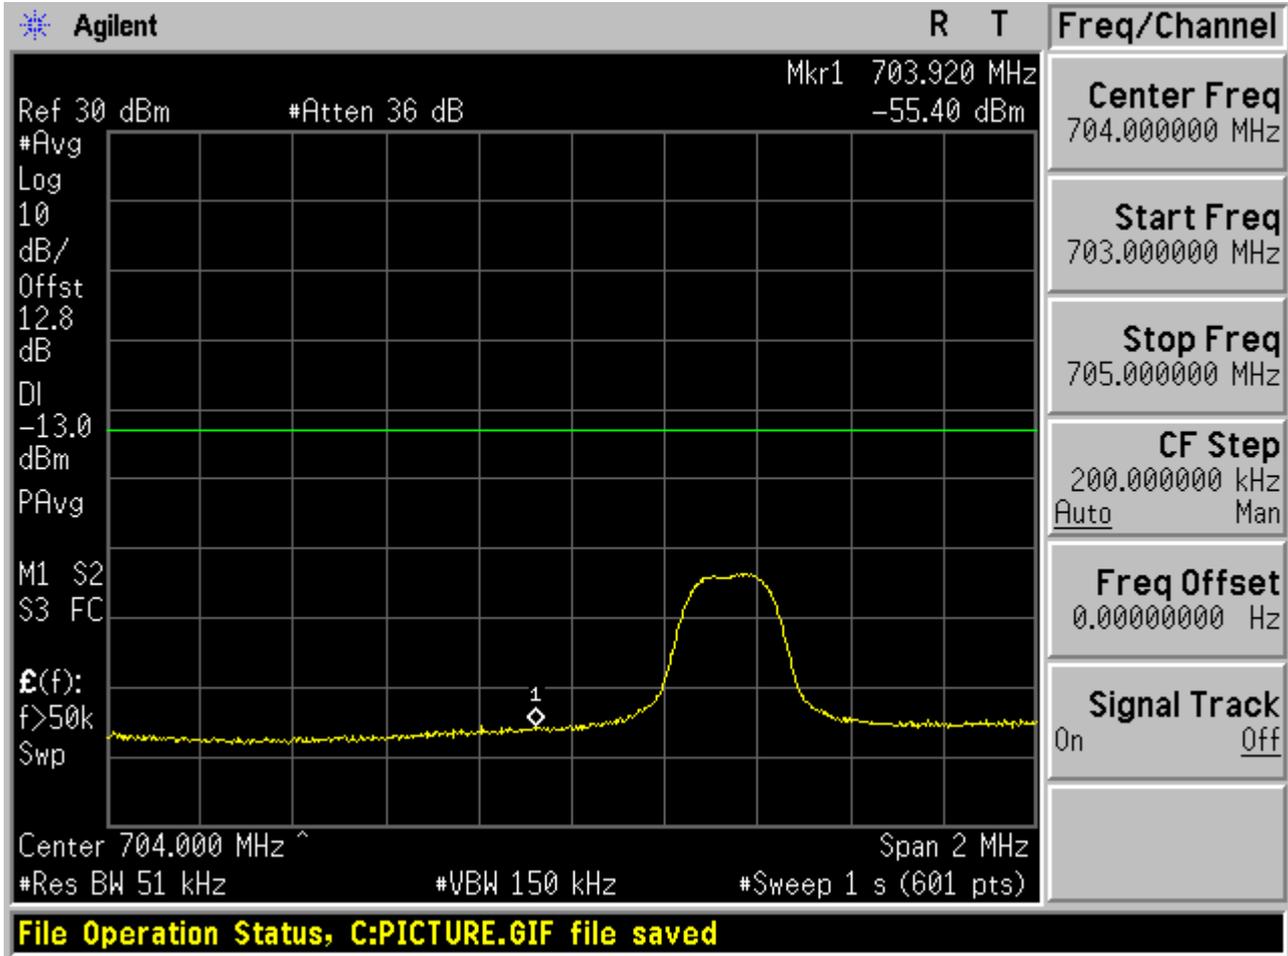




1.1.1.1.3 QPSK/non-1RB #mid/2

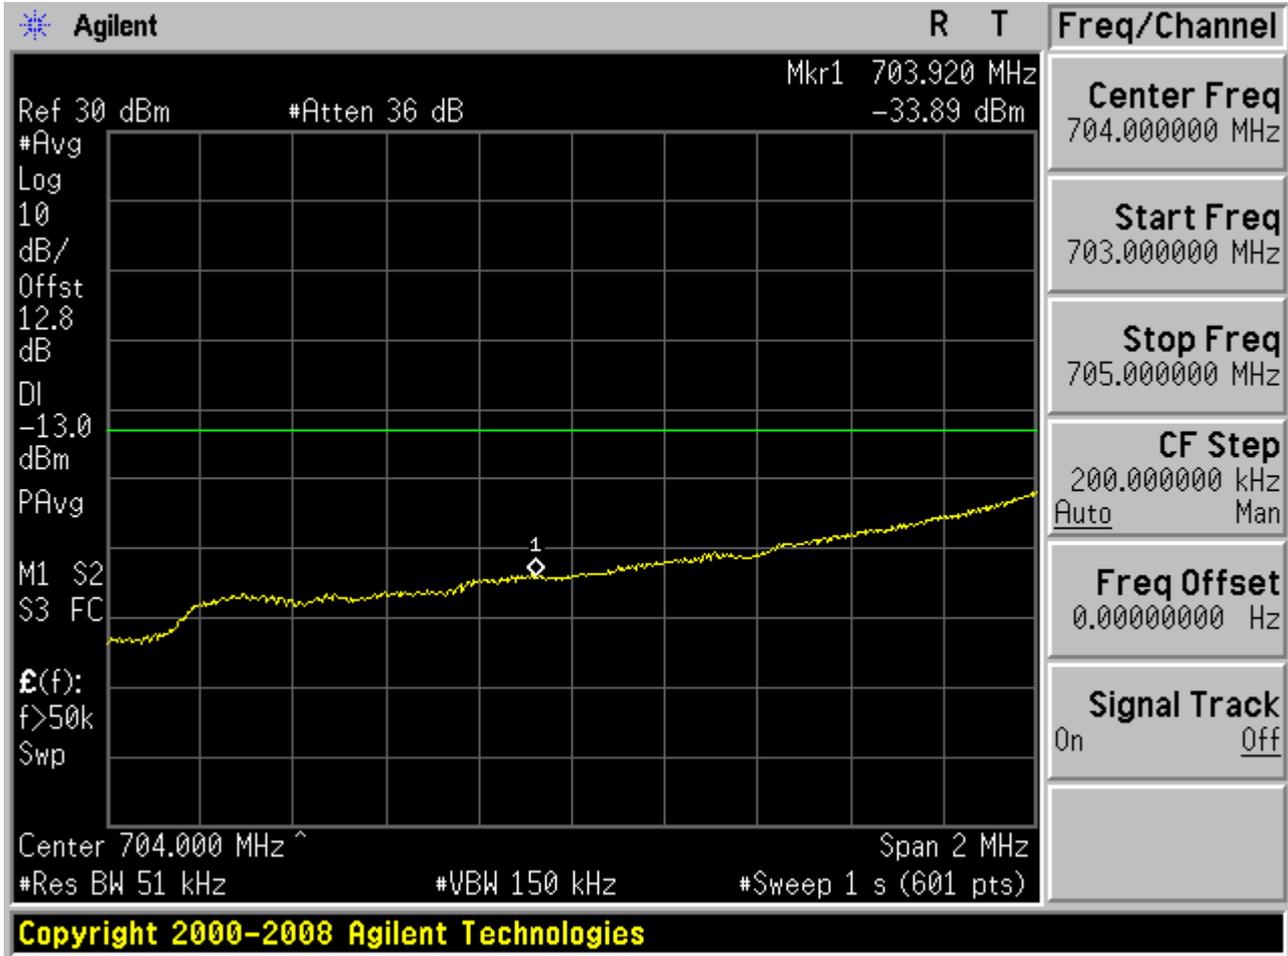




1.1.1.1.4 QPSK/full RBs

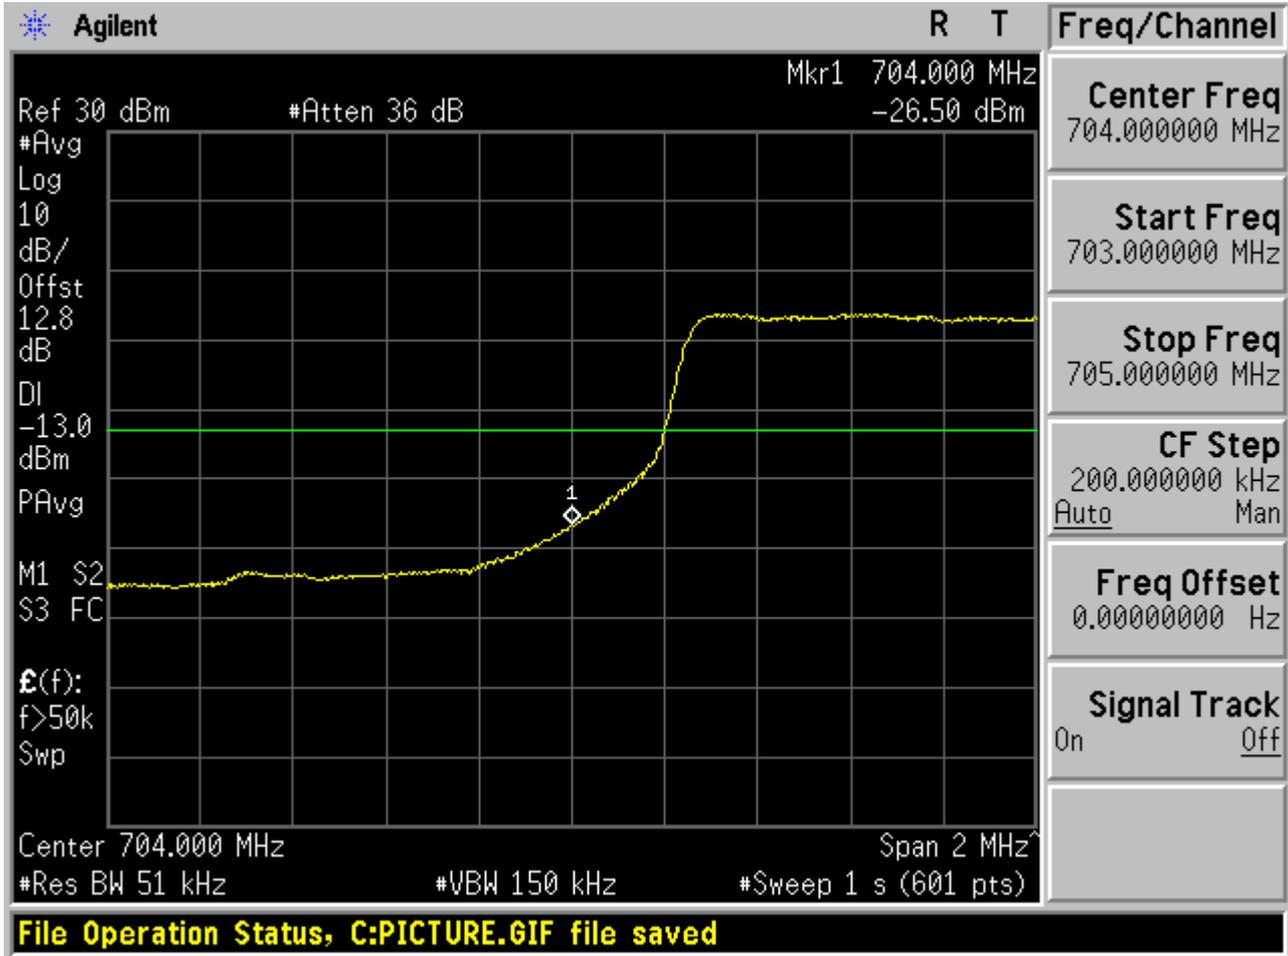




1.1.1.2 Channel= T

1.1.1.2.1 QPSK/1RB # 0

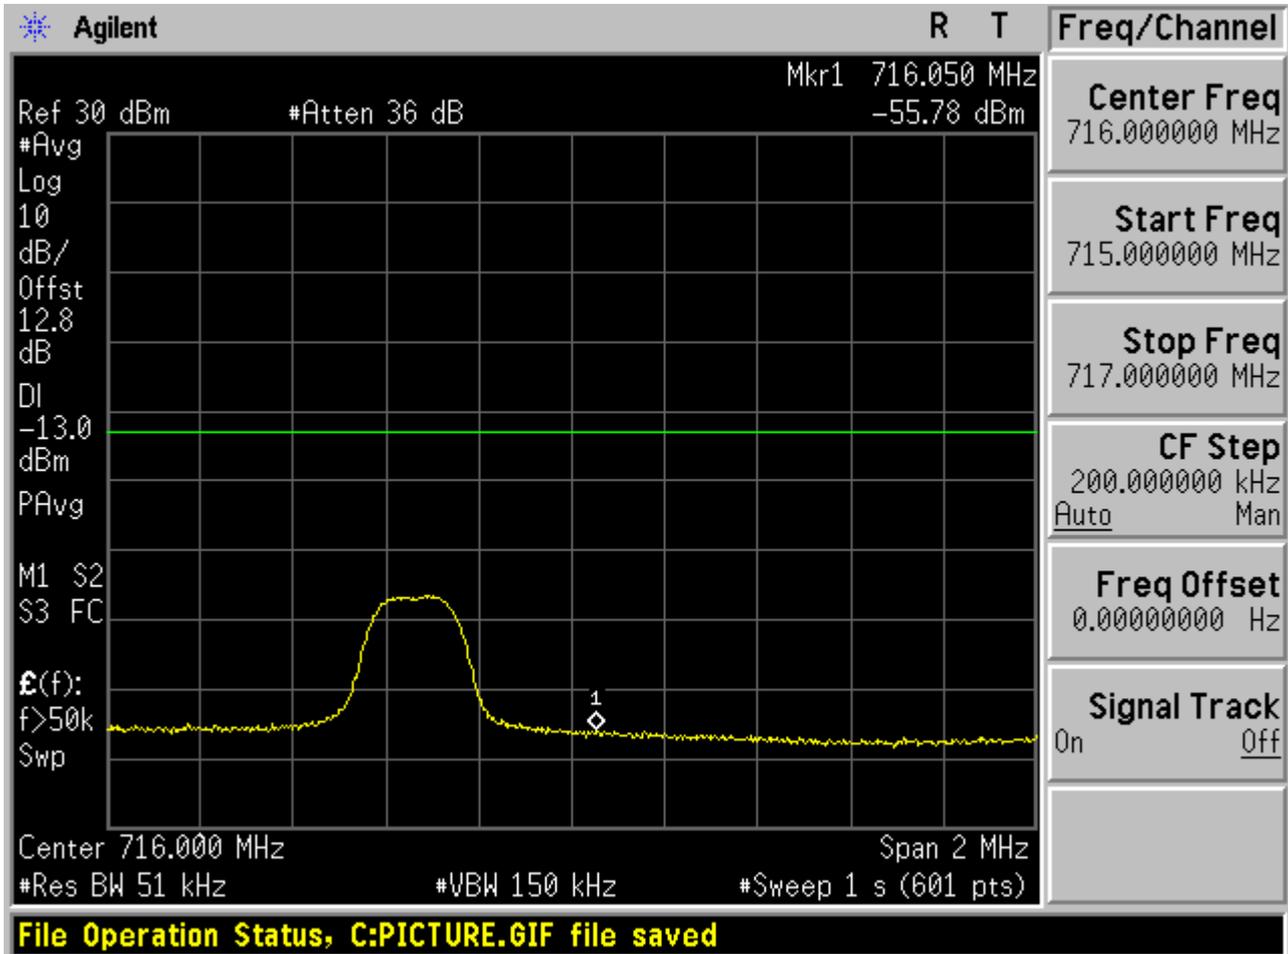




1.1.1.2.2 QPSK/1RB # max

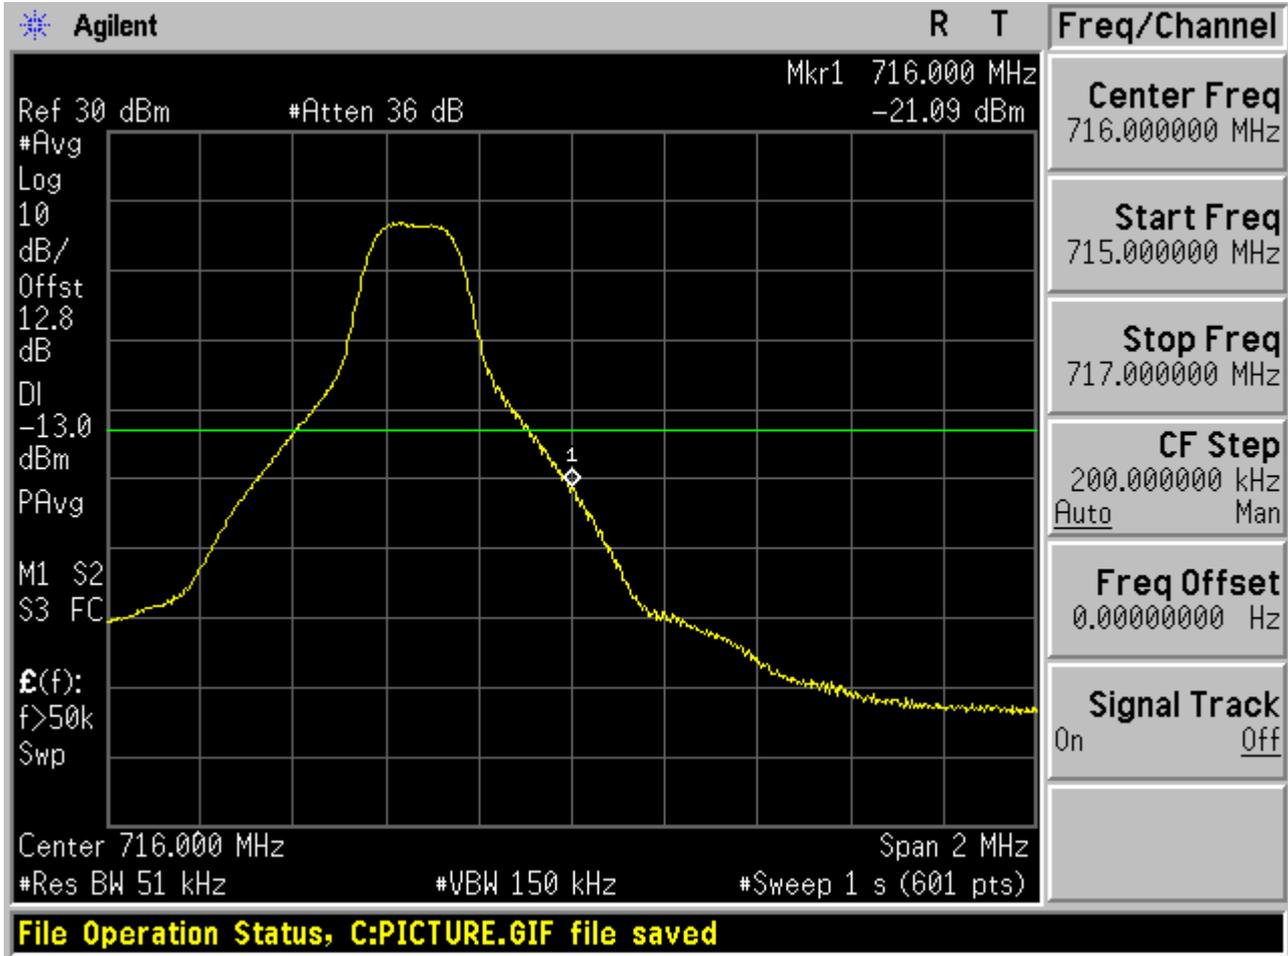




1.1.1.2.3 QPSK/non-1RB #mid/2

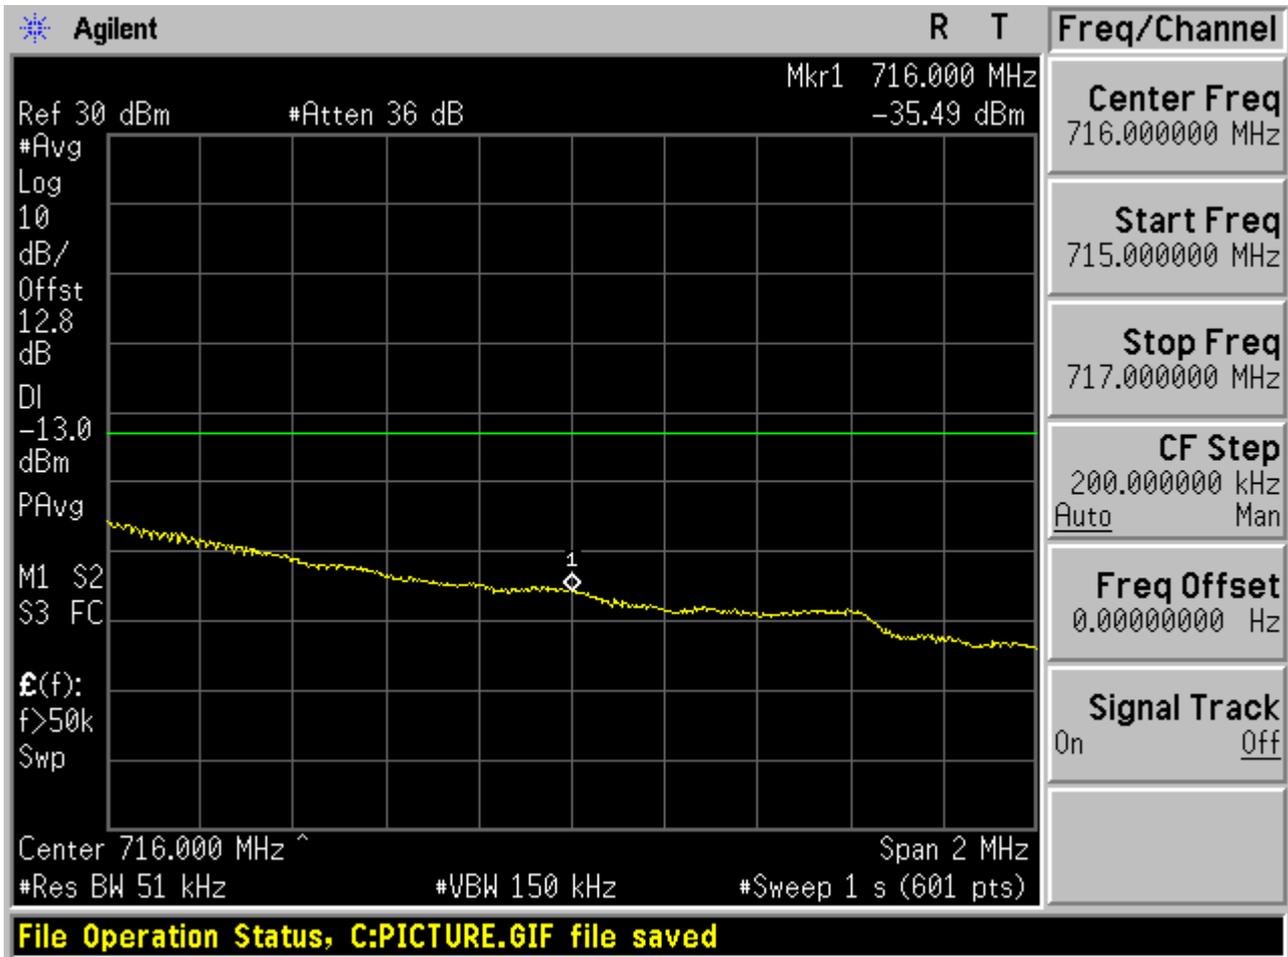



1.1.1.2.4 QPSK/full RBs

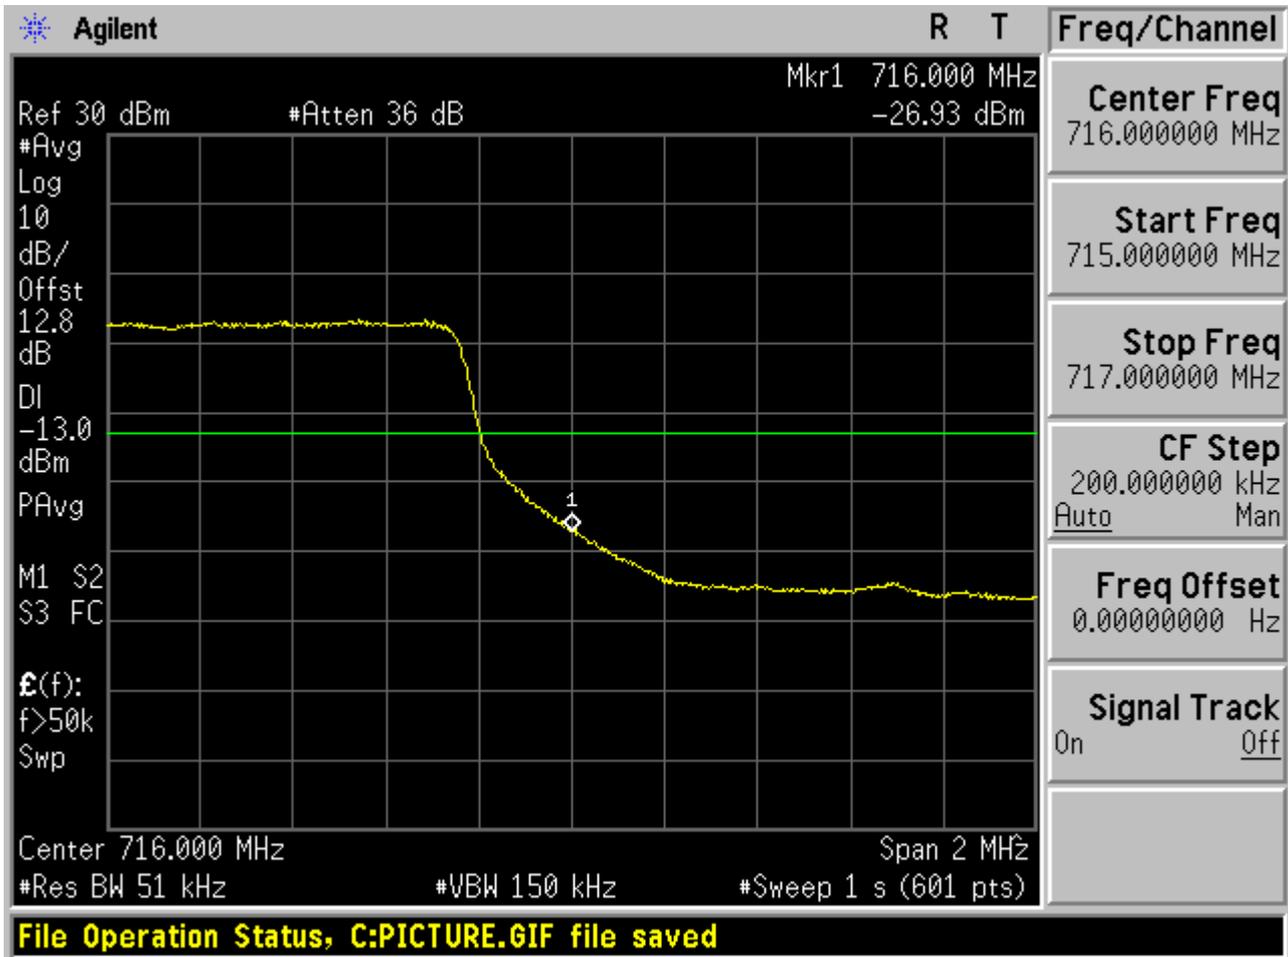




1.1.2 Channel Bandwidth = 10 MHz


1.1.2.1 Channel= B

1.1.2.1.1 QPSK/1RB # 0

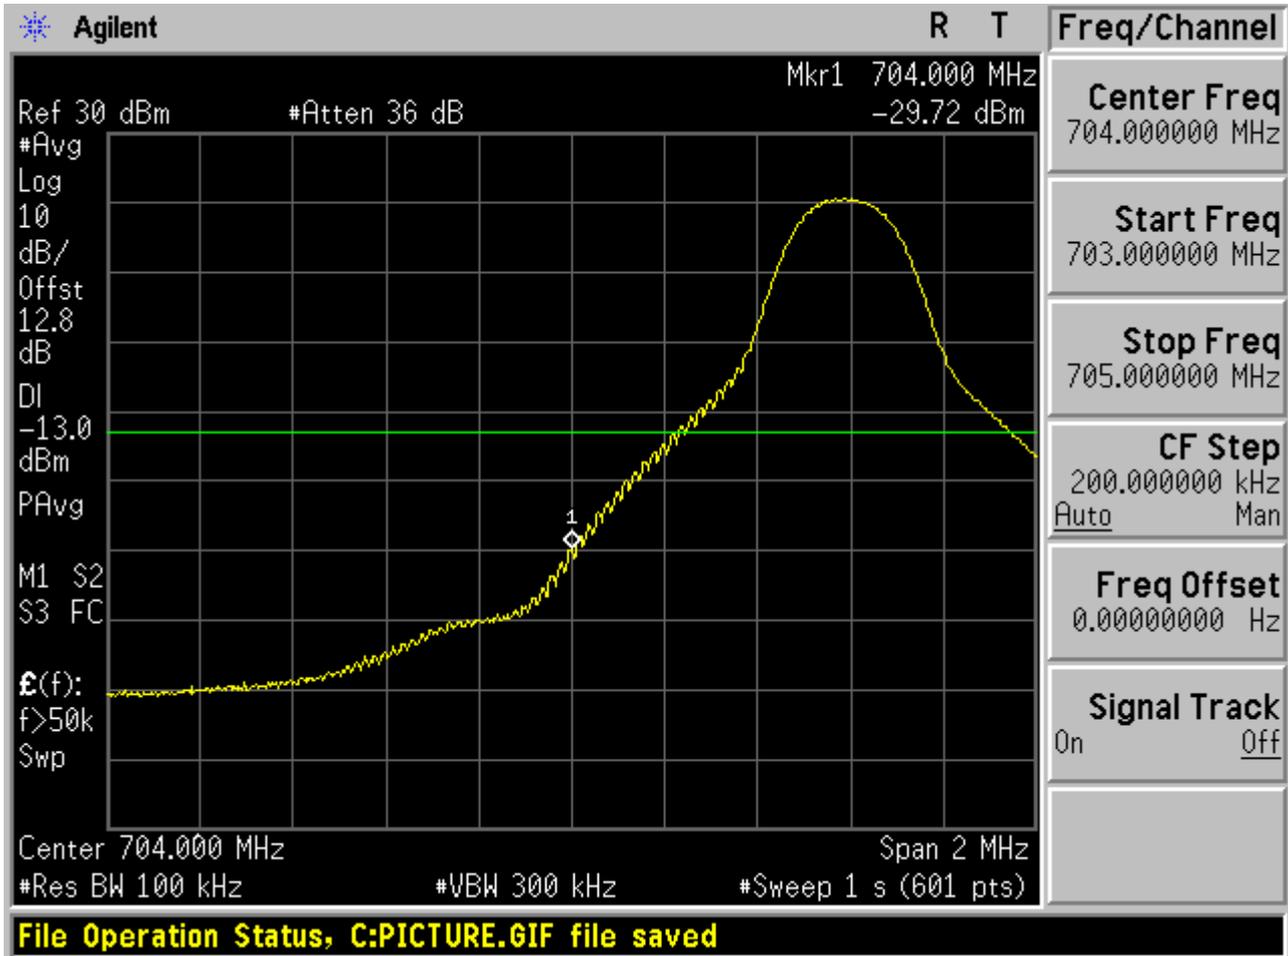




1.1.2.1.2 QPSK/1RB # max

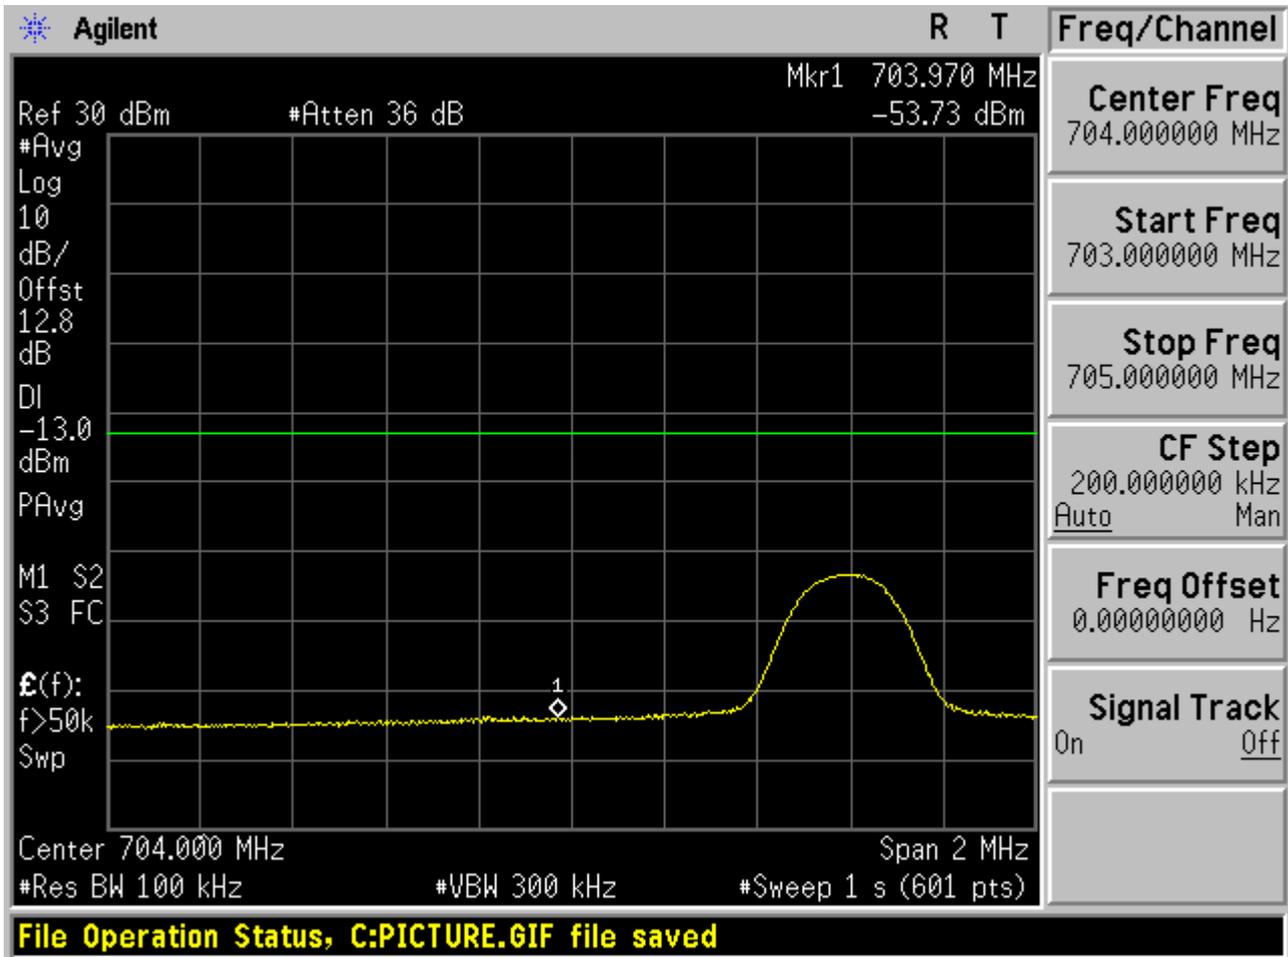




1.1.2.1.3 QPSK/non-1RB #mid/2

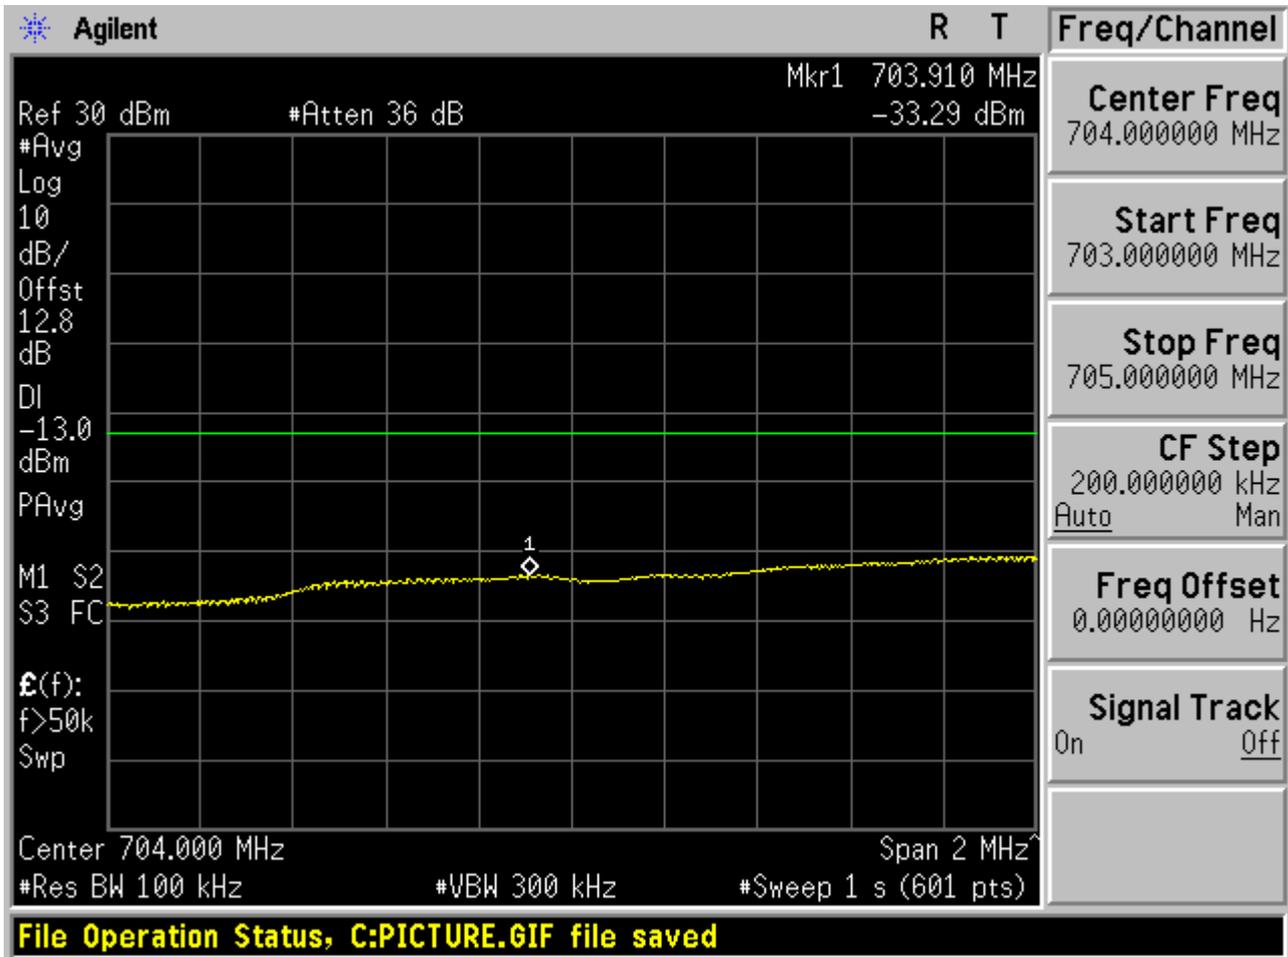




1.1.2.1.4 QPSK/full RBs

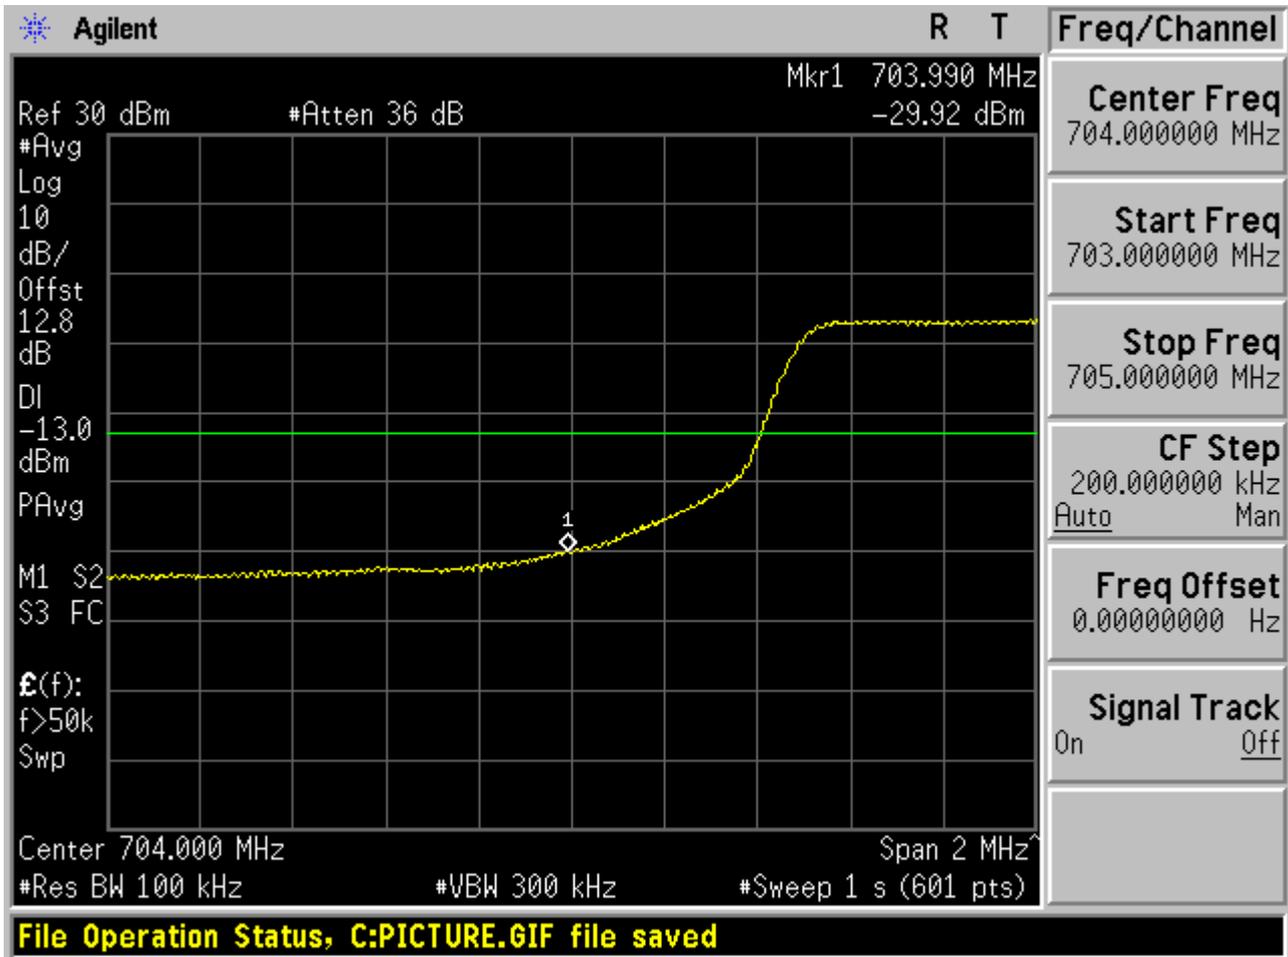




1.1.2.2 Channel= T

1.1.2.2.1 QPSK/1RB # 0

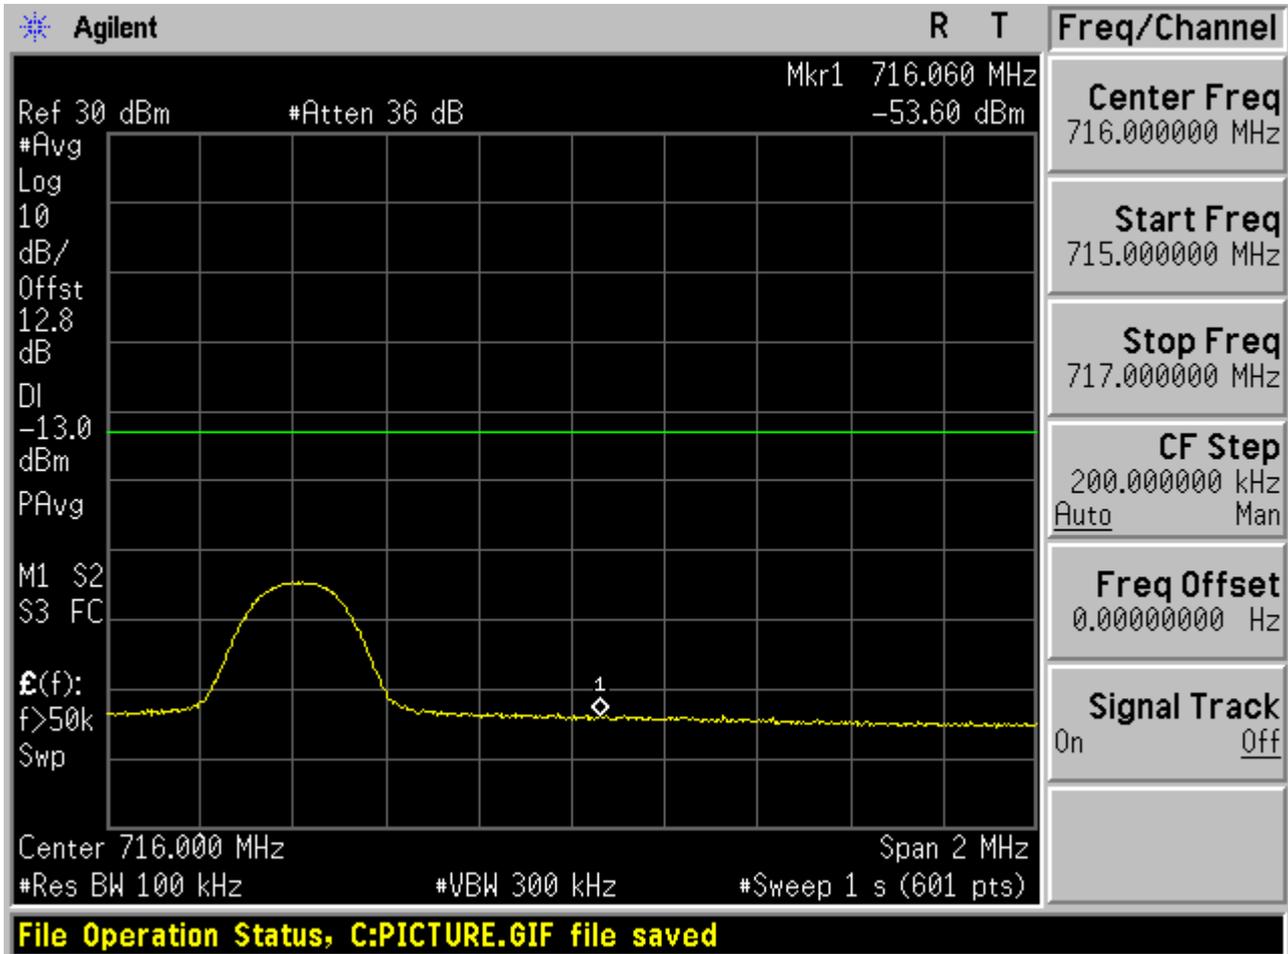




1.1.2.2.2 QPSK/1RB # max

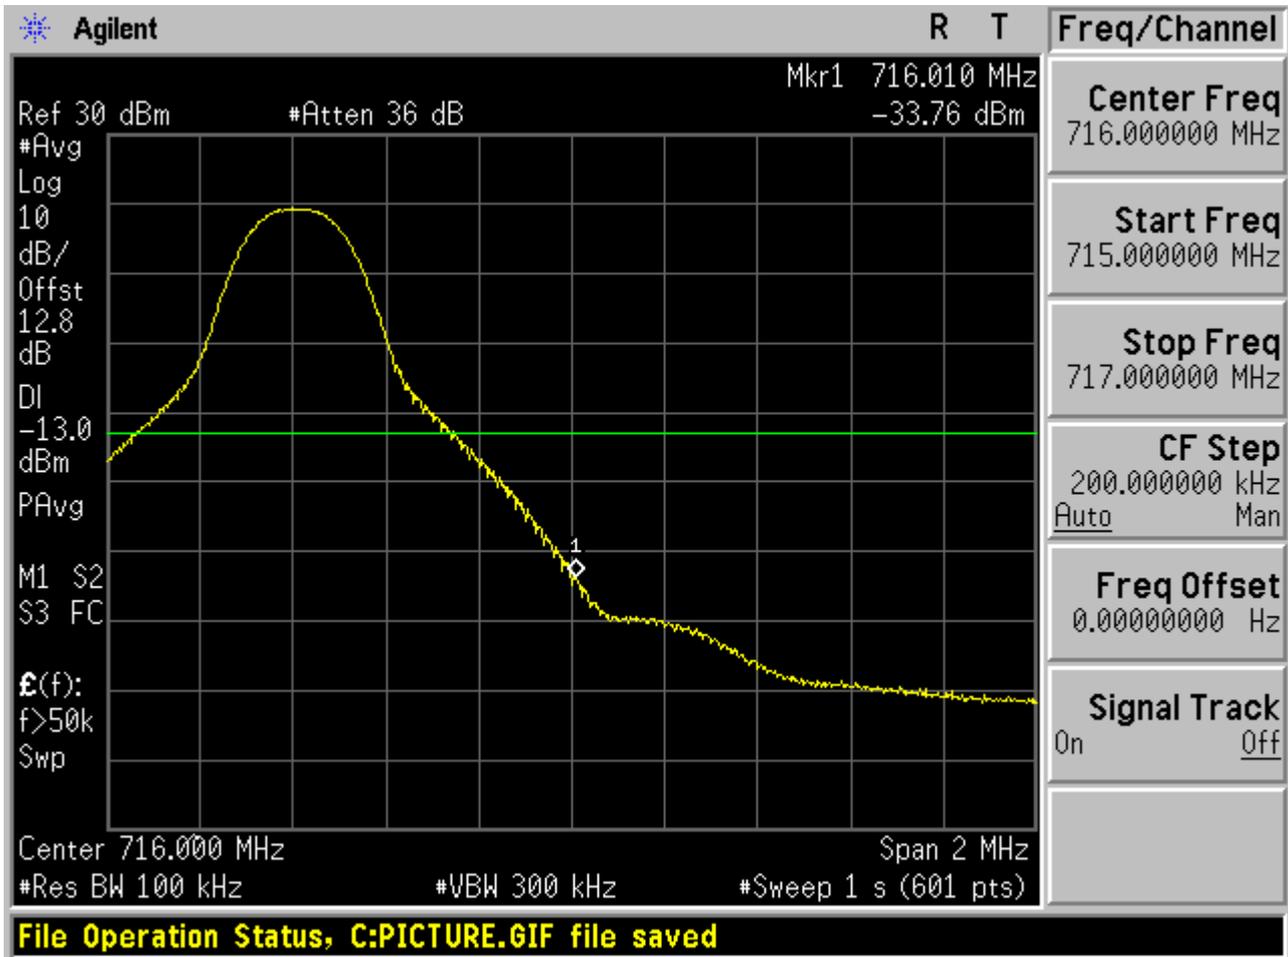




1.1.2.2.3 QPSK/non-1RB #mid/2

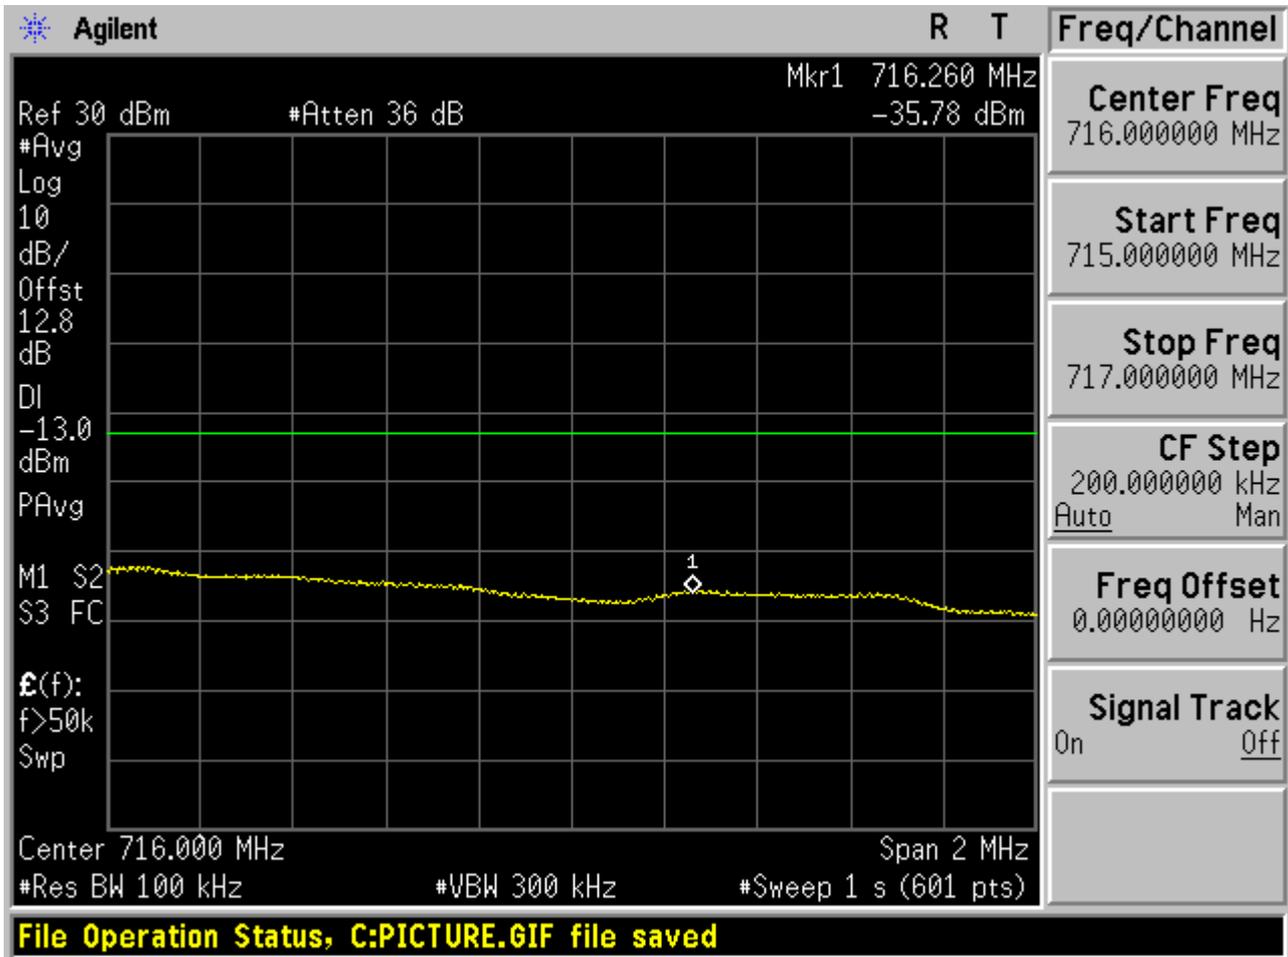



1.1.2.2.4 QPSK/full RBs

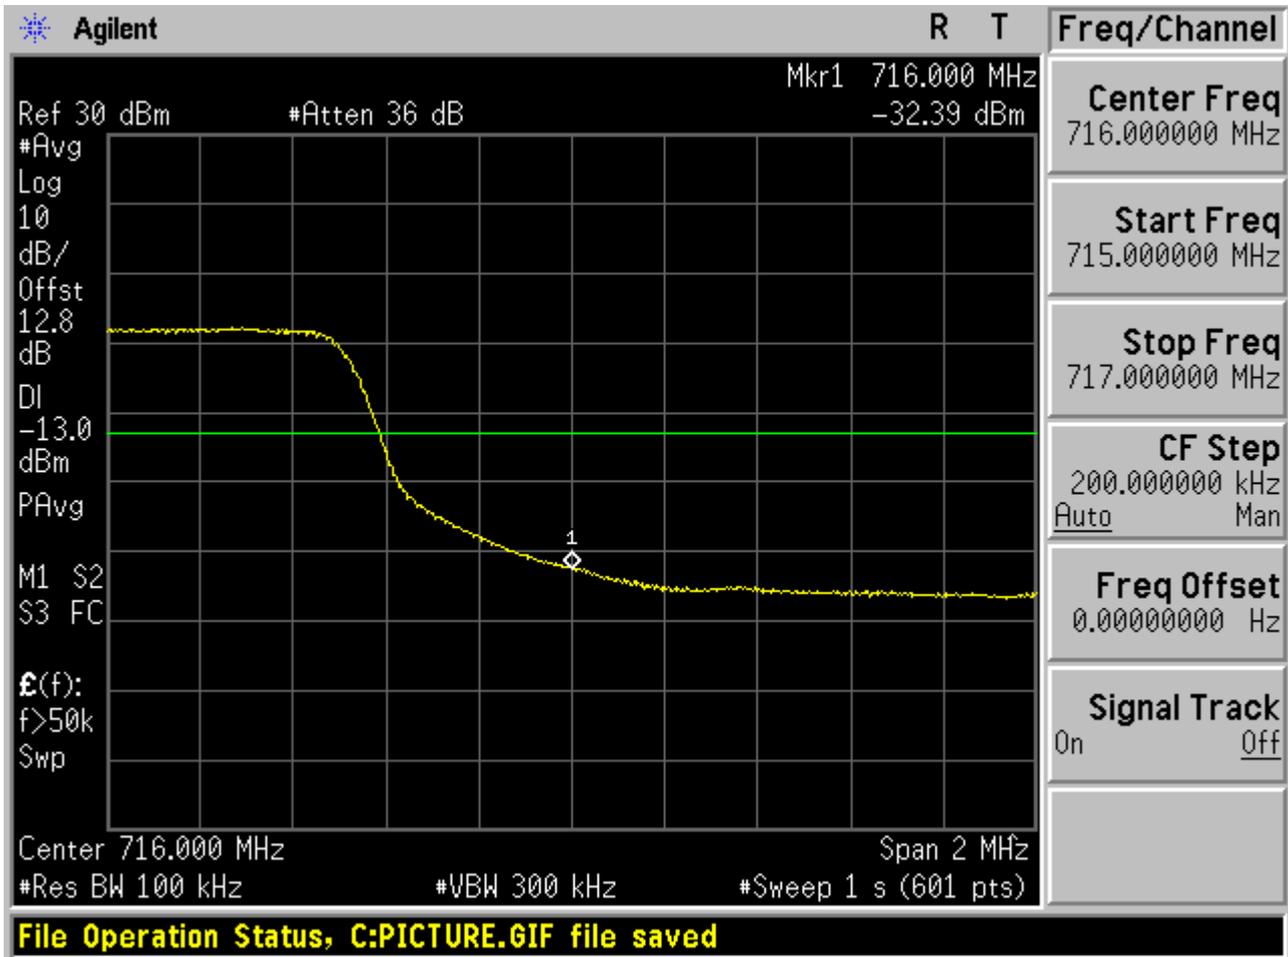




1.2 Test Mode=TM2

1.2.1 Channel Bandwidth = 5 MHz


1.2.1.1 Channel= B

1.2.1.1.1 16QAM/1RB #0

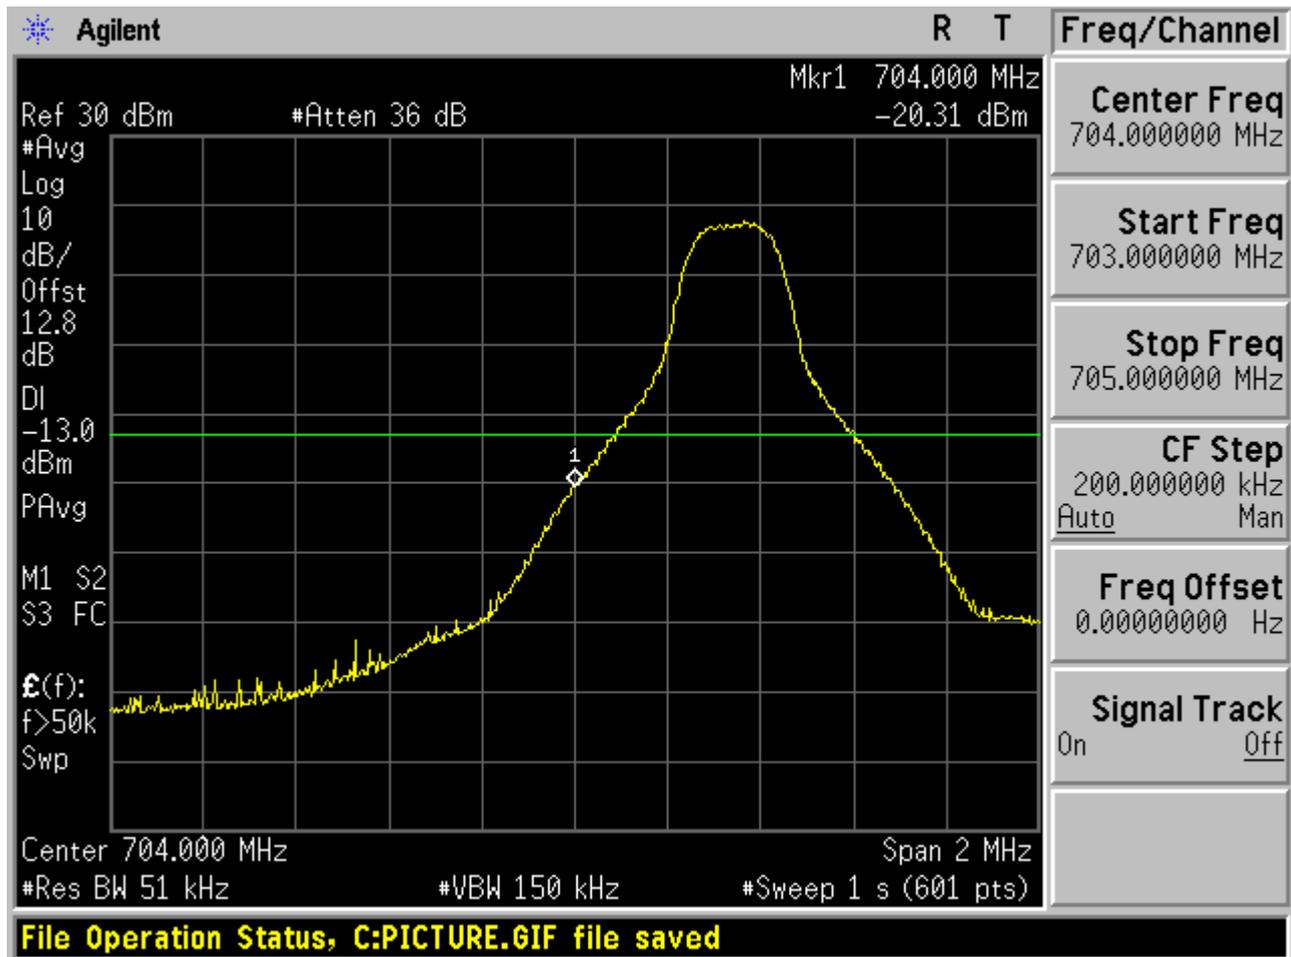




1.2.1.1.2 16QAM/1RB #max

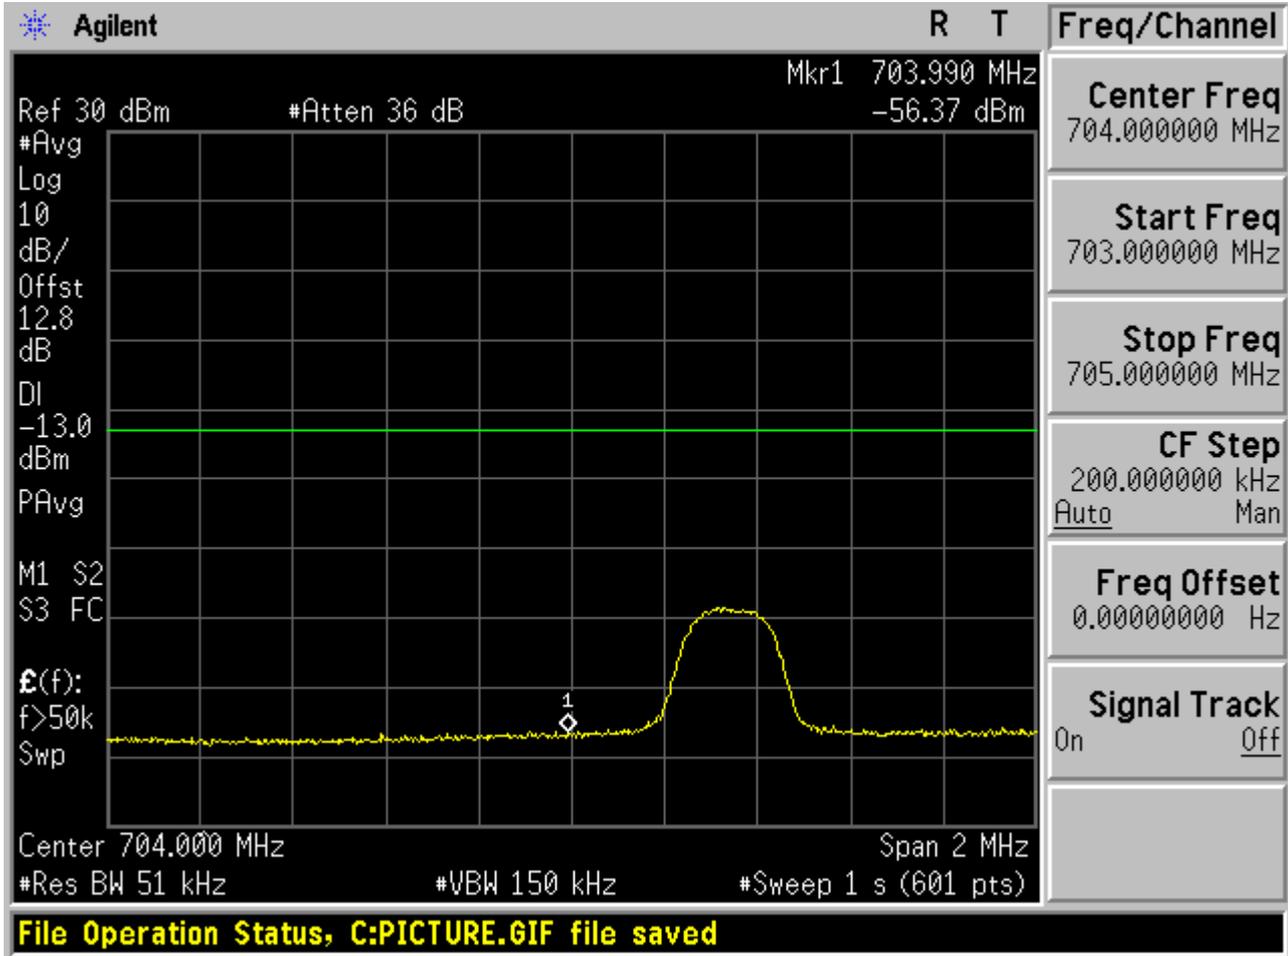




1.2.1.1.3 16QAM / non-1RB #mid/2

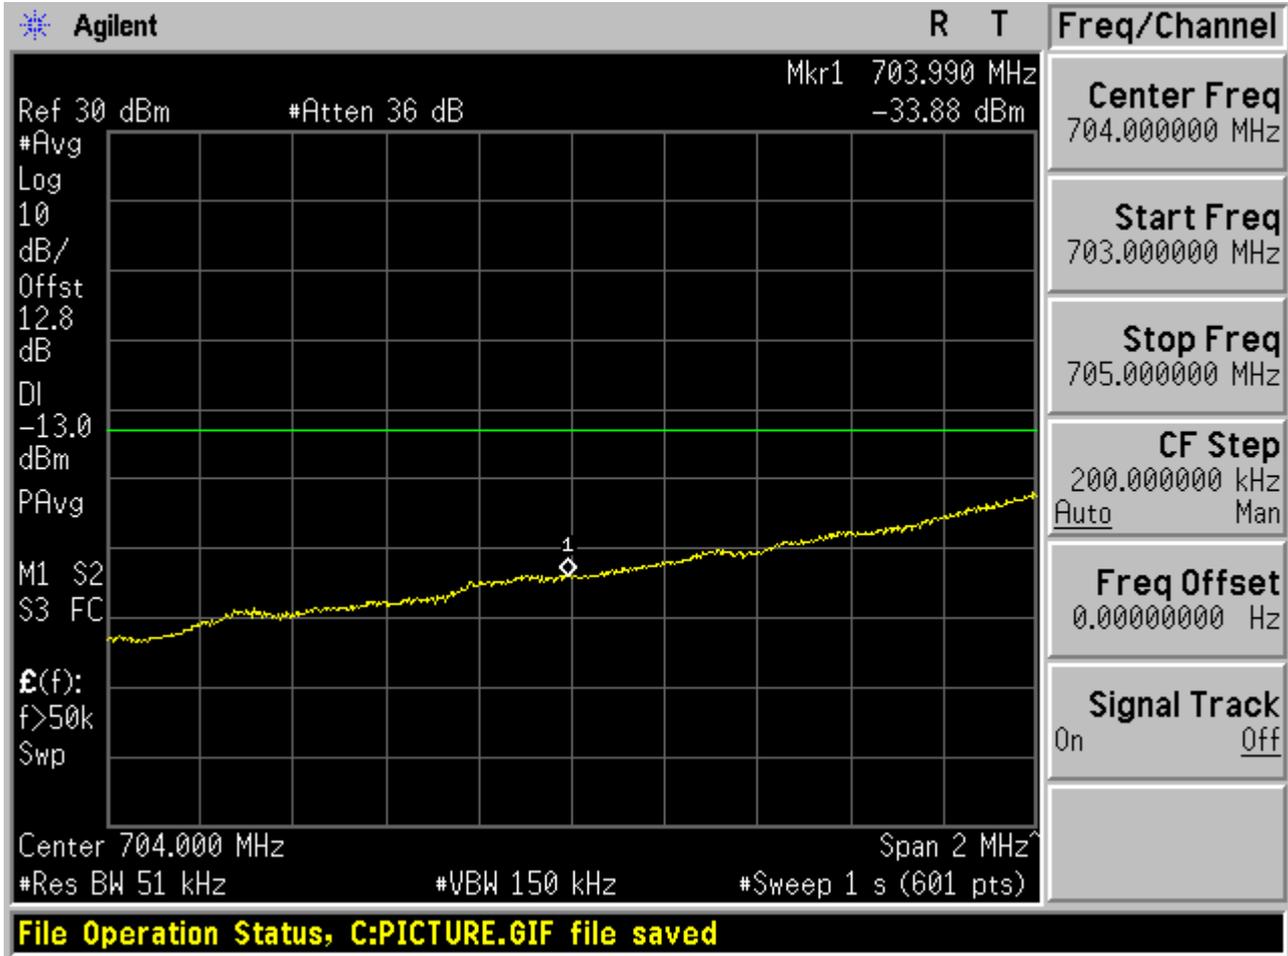




1.2.1.1.4 16QAM /full RBs

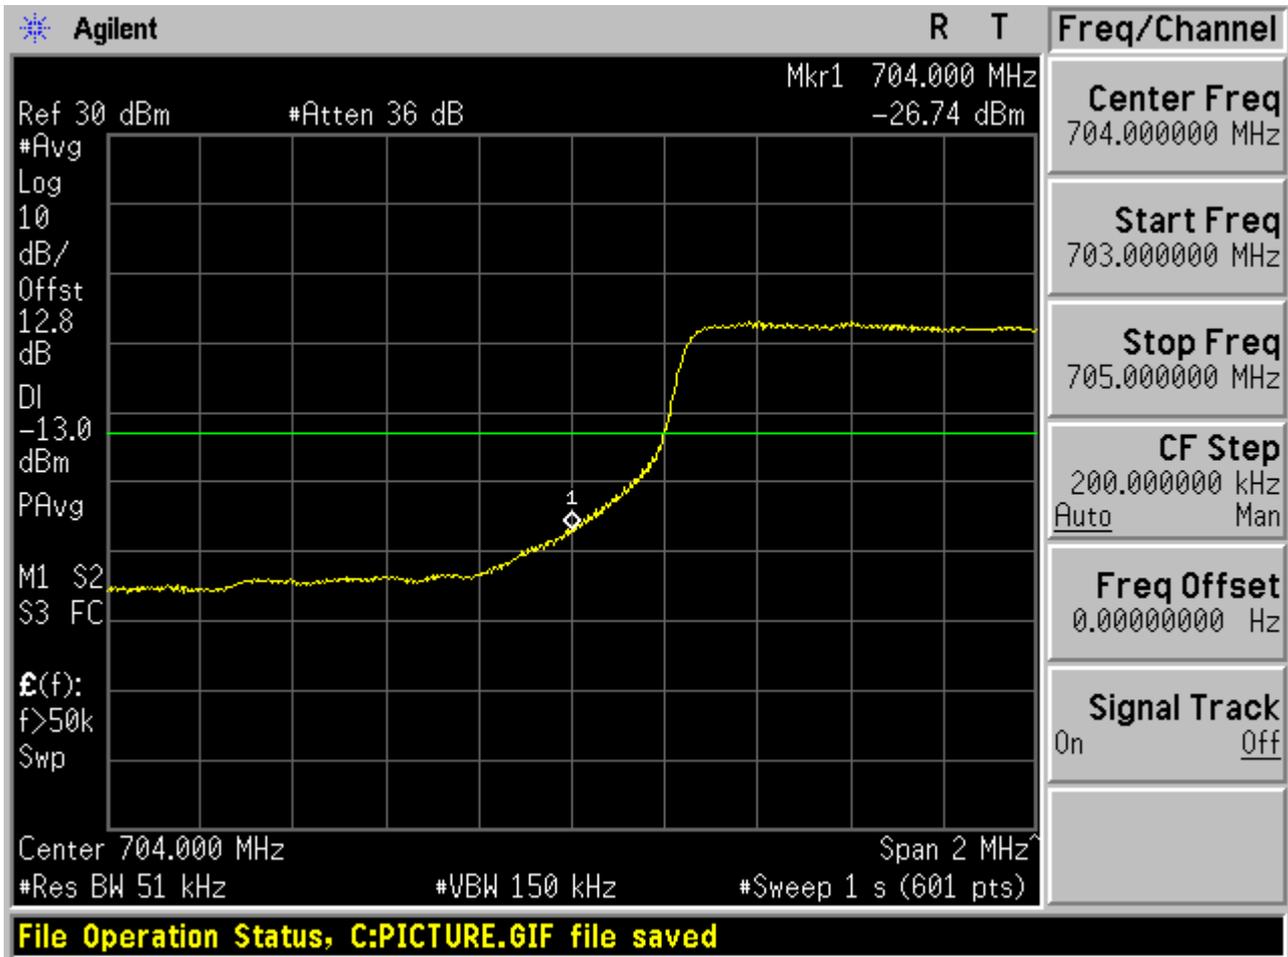




1.2.1.2 Channel= T

1.2.1.2.1 16QAM /1RB #0

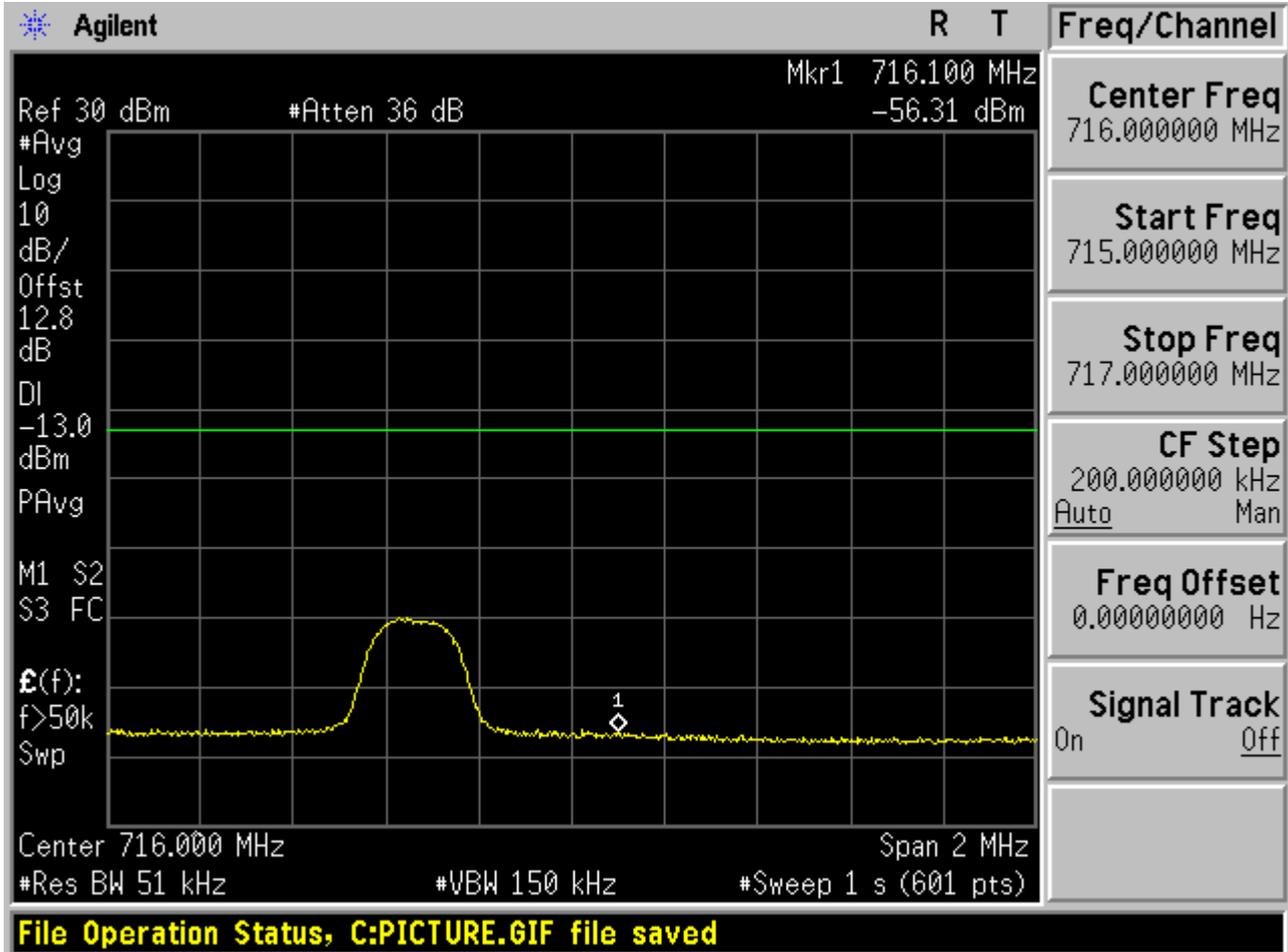




1.2.1.2.2 16QAM /1RB #max

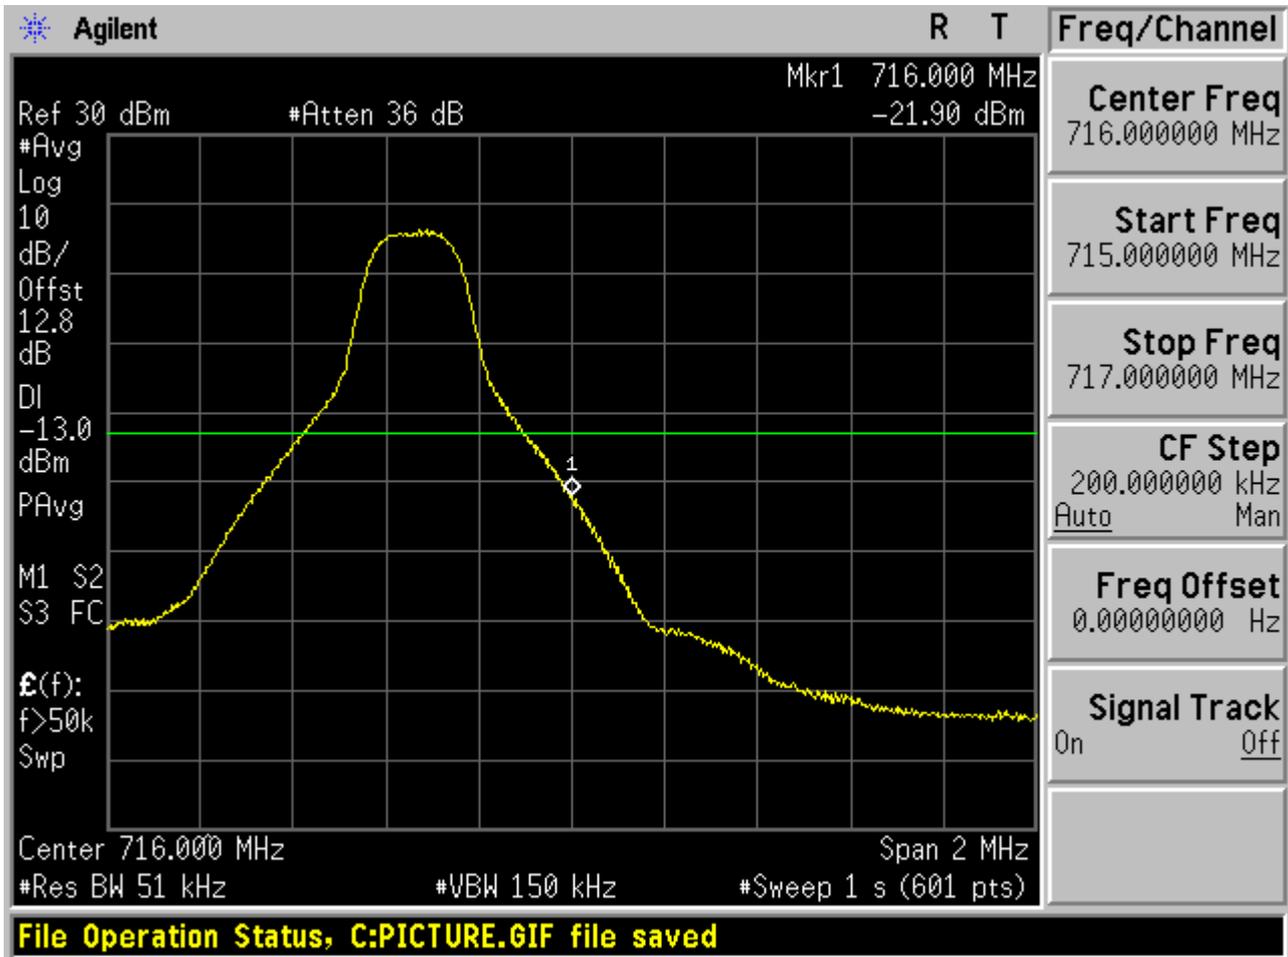




1.2.1.2.3 16QAM / non-1RB #mid/2

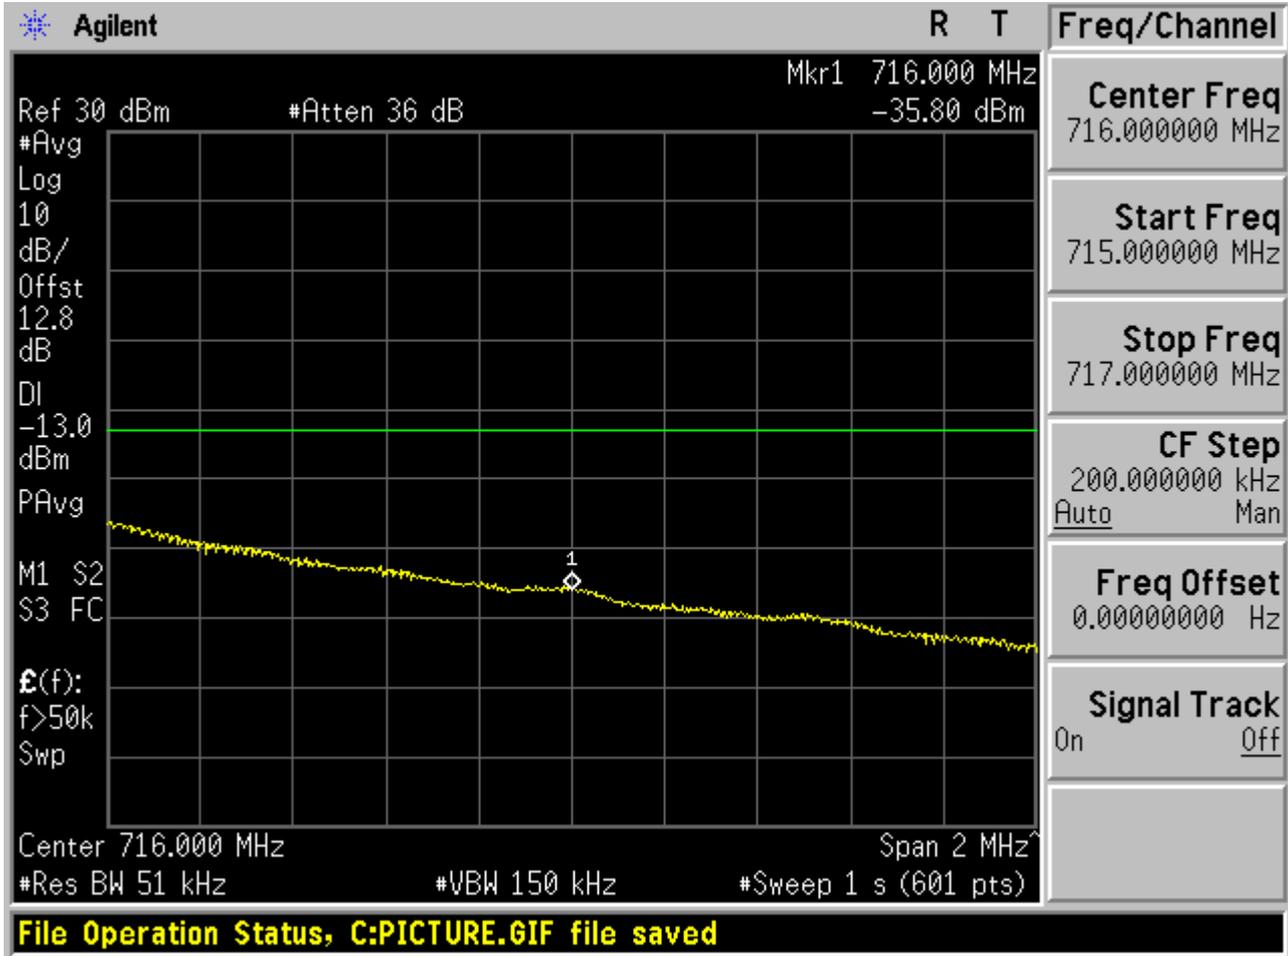



1.2.1.2.4 16QAM /full RBs

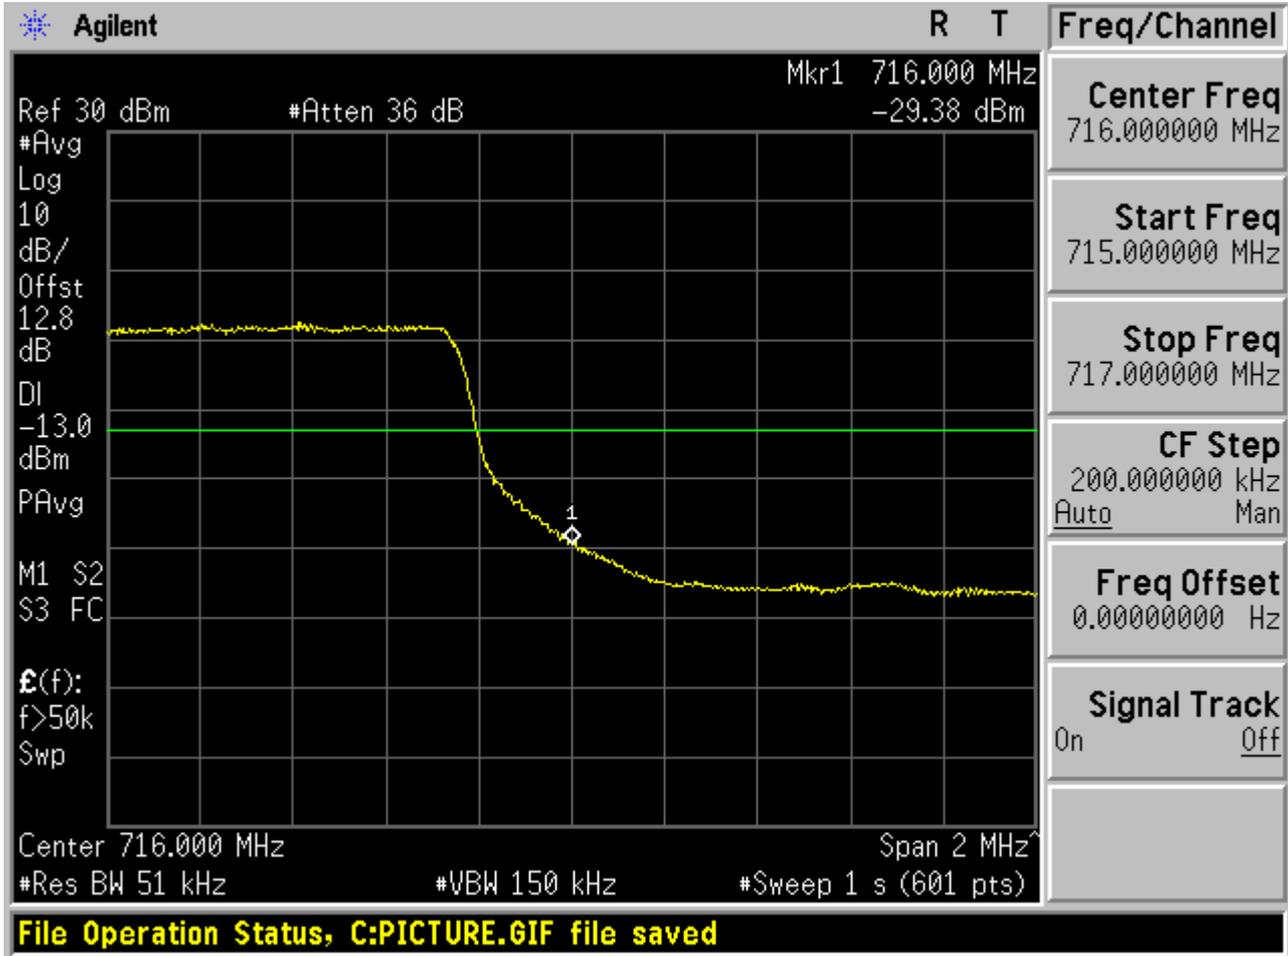




1.2.2 Channel Bandwidth = 10 MHz


1.2.2.1 Channel= B

1.2.2.1.1 16QAM/1RB #0

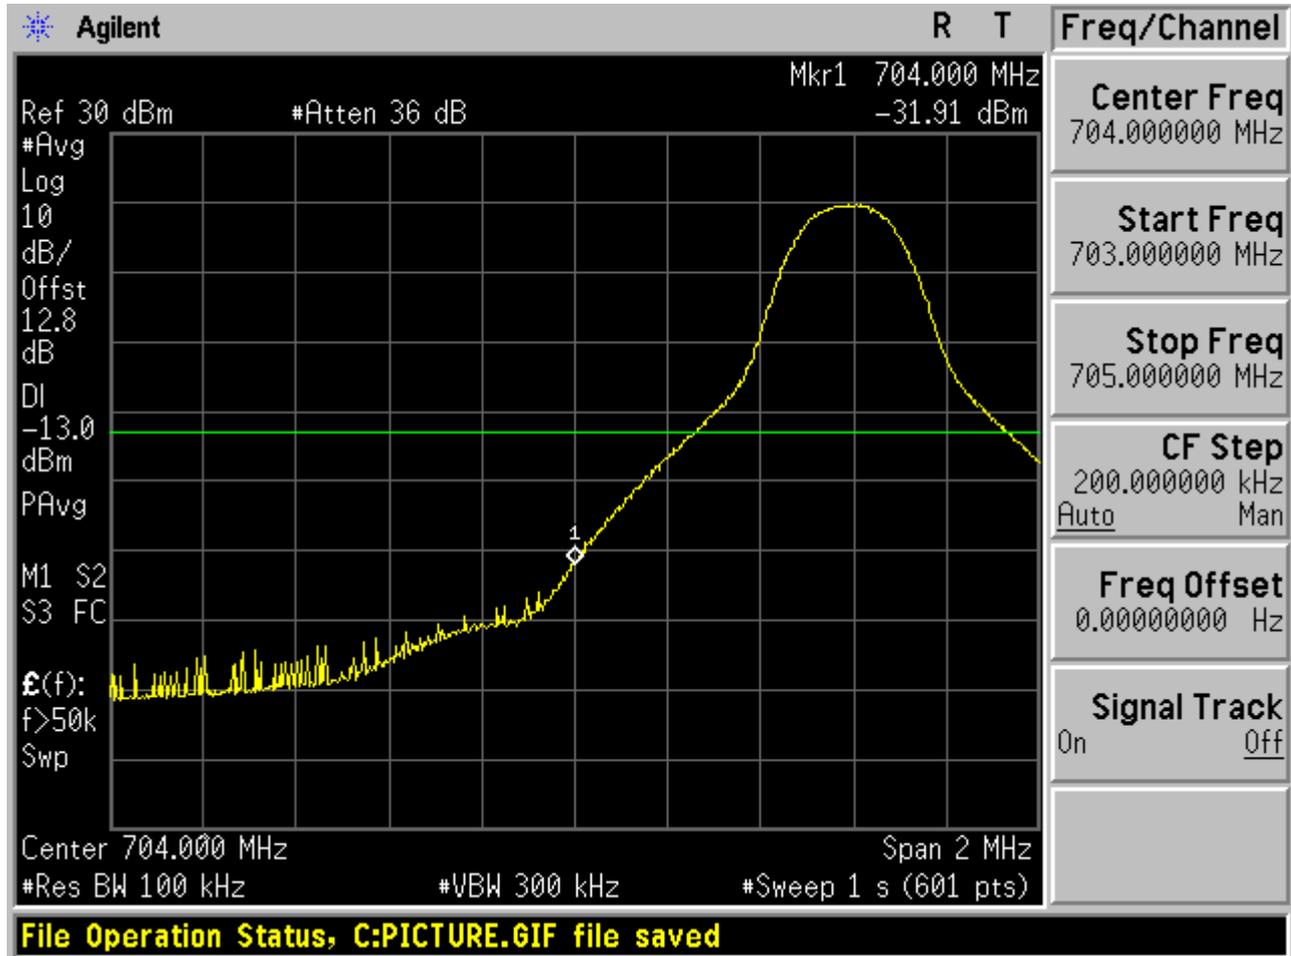




1.2.2.1.2 16QAM/1RB #max

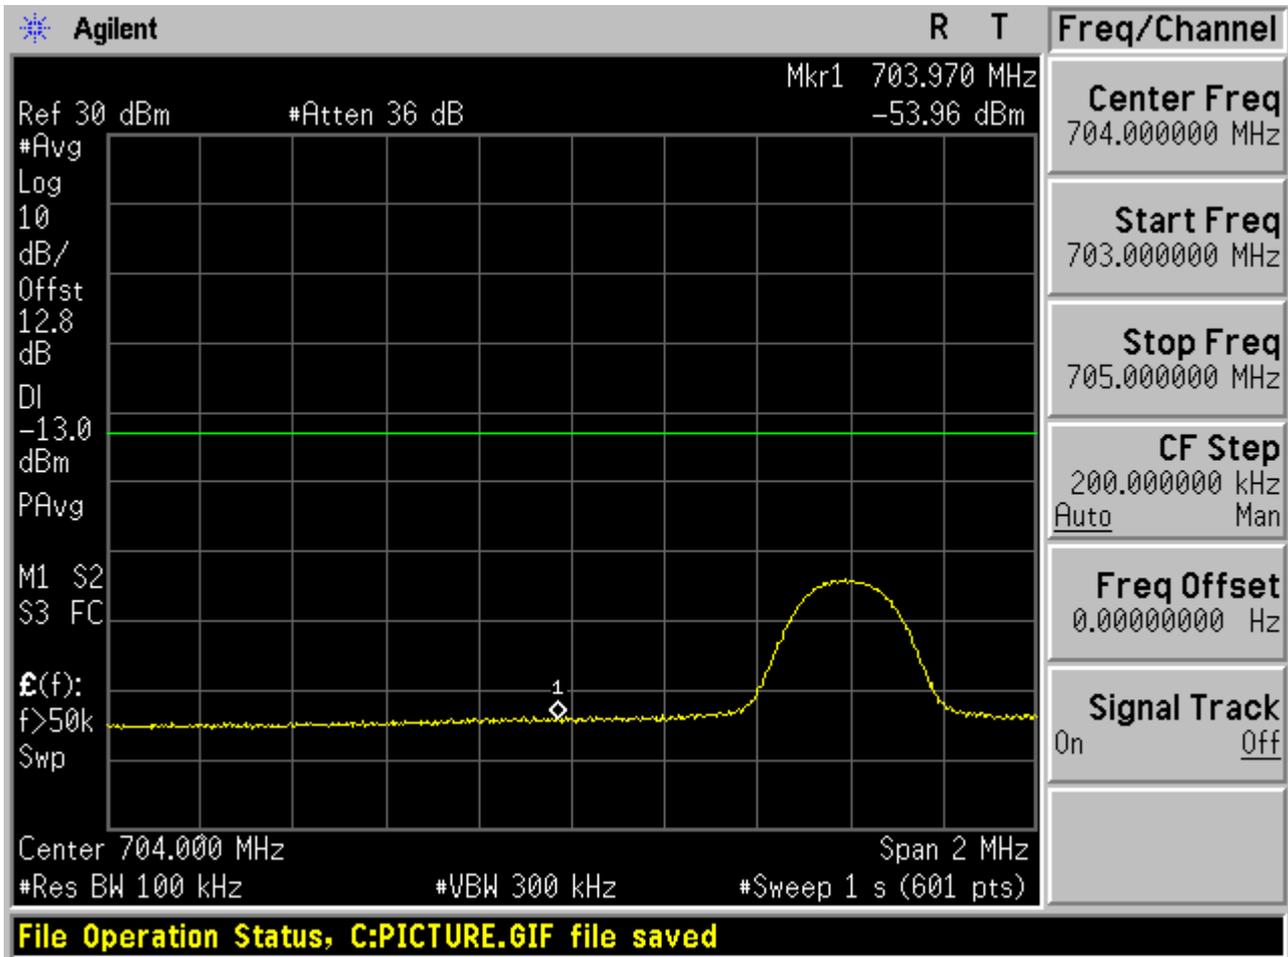




1.2.2.1.3 16QAM / non-1RB #mid/2

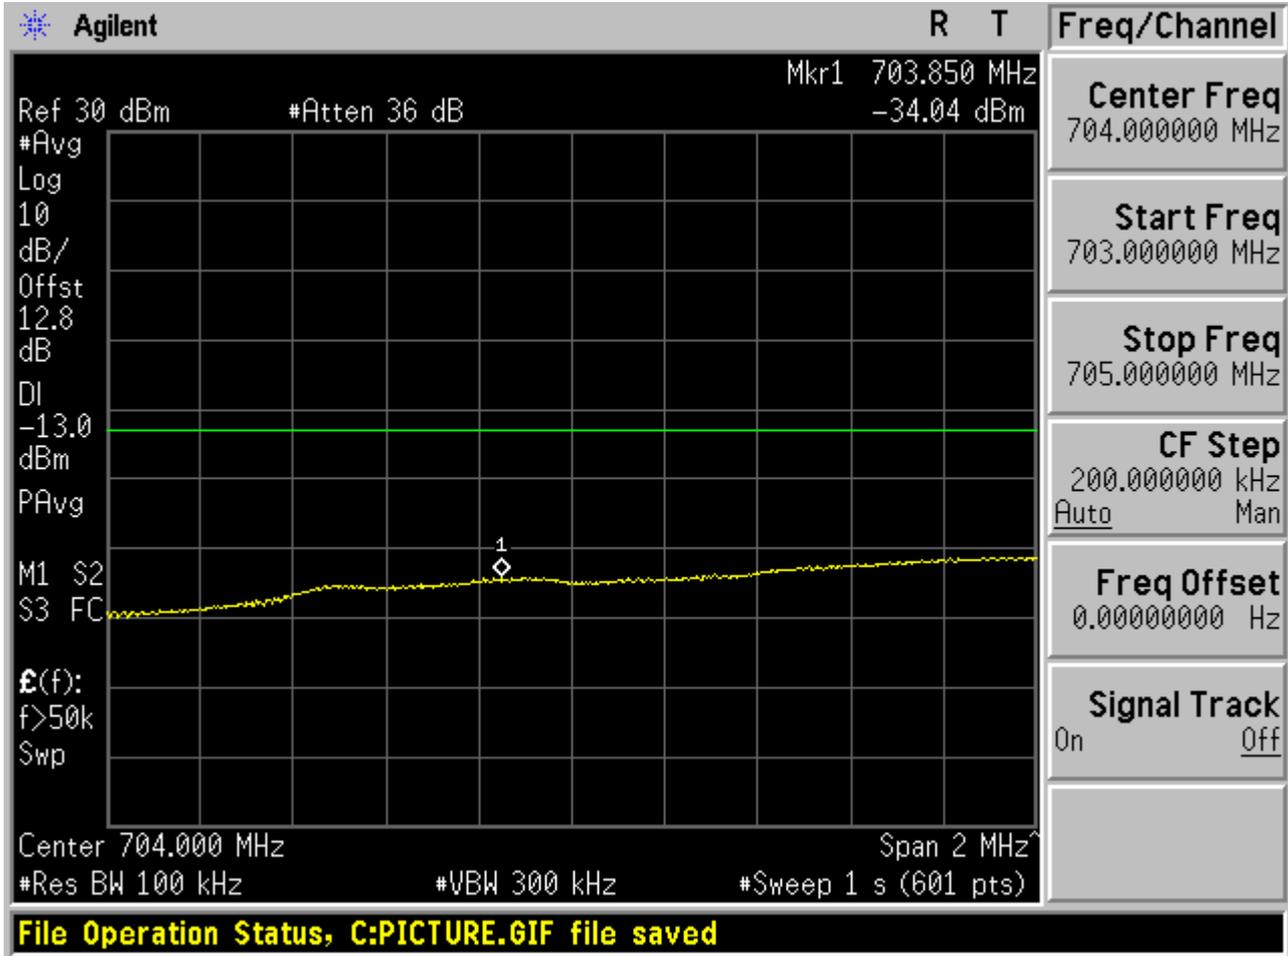




1.2.2.1.4 16QAM /full RBs

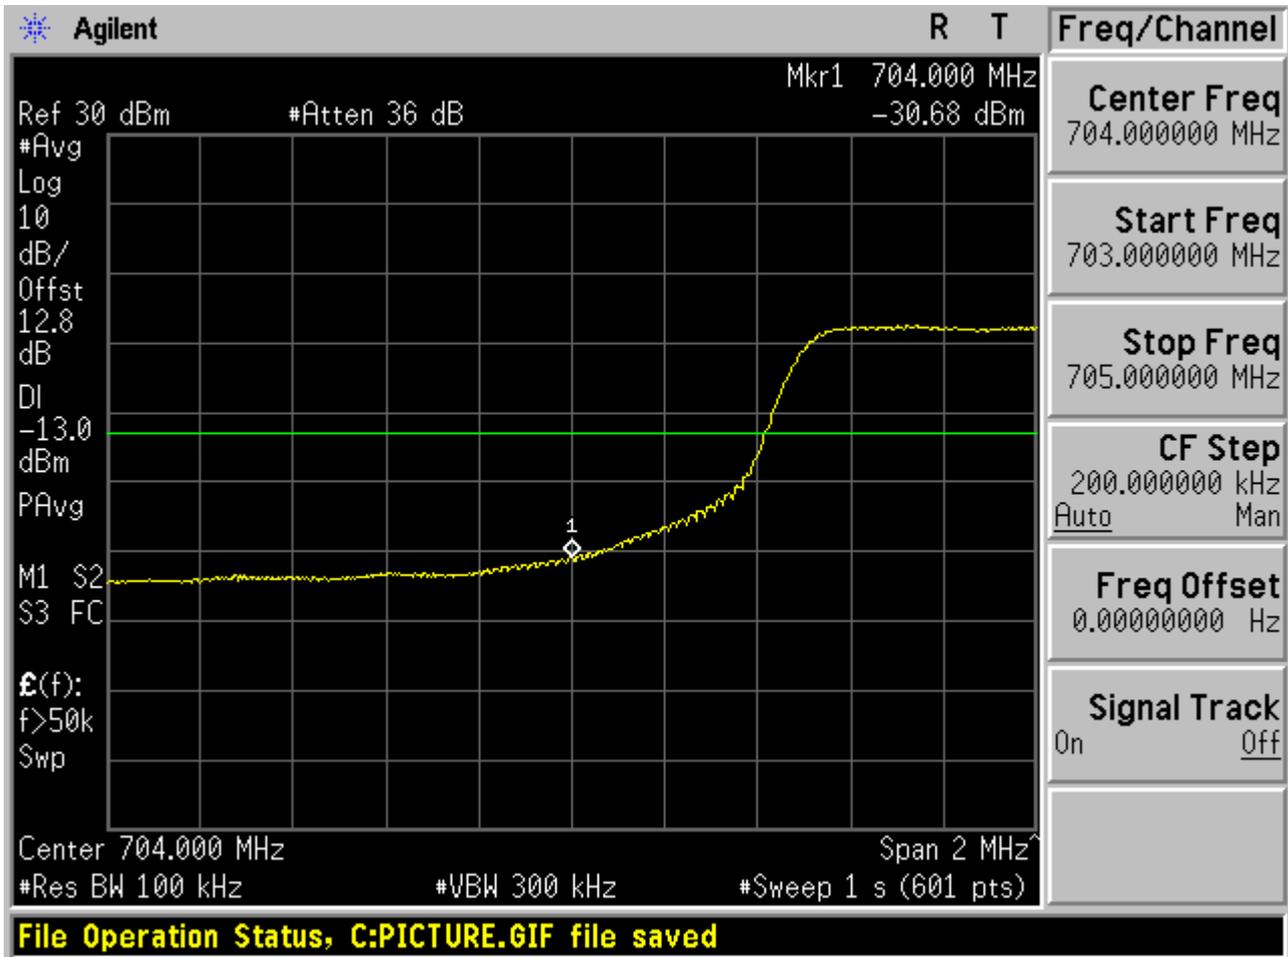




1.2.2.2 Channel= T

1.2.2.2.1 16QAM /1RB #0

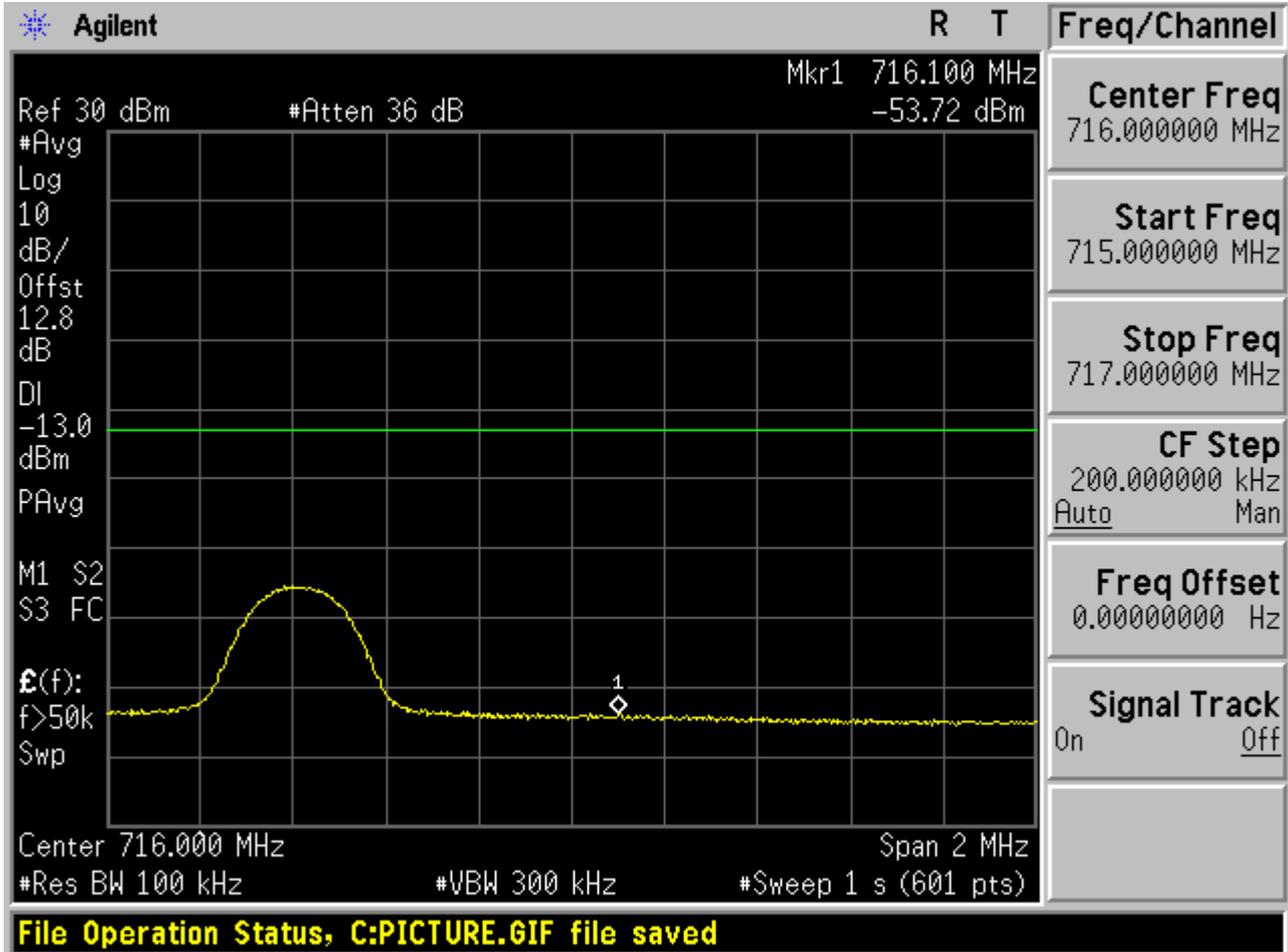




1.2.2.2.2 16QAM /1RB #max

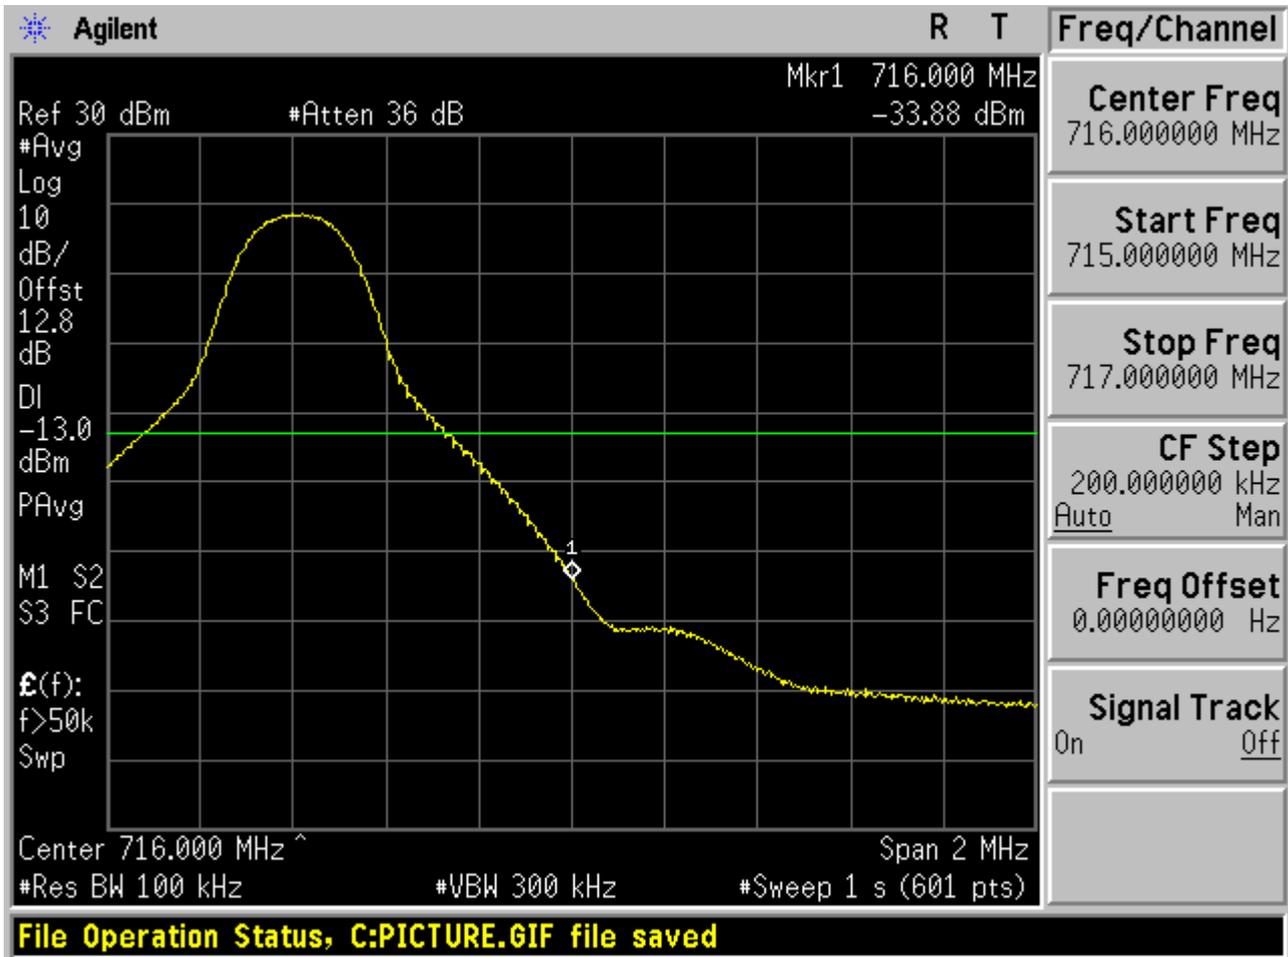




1.2.2.2.3 16QAM / non-1RB #mid/2

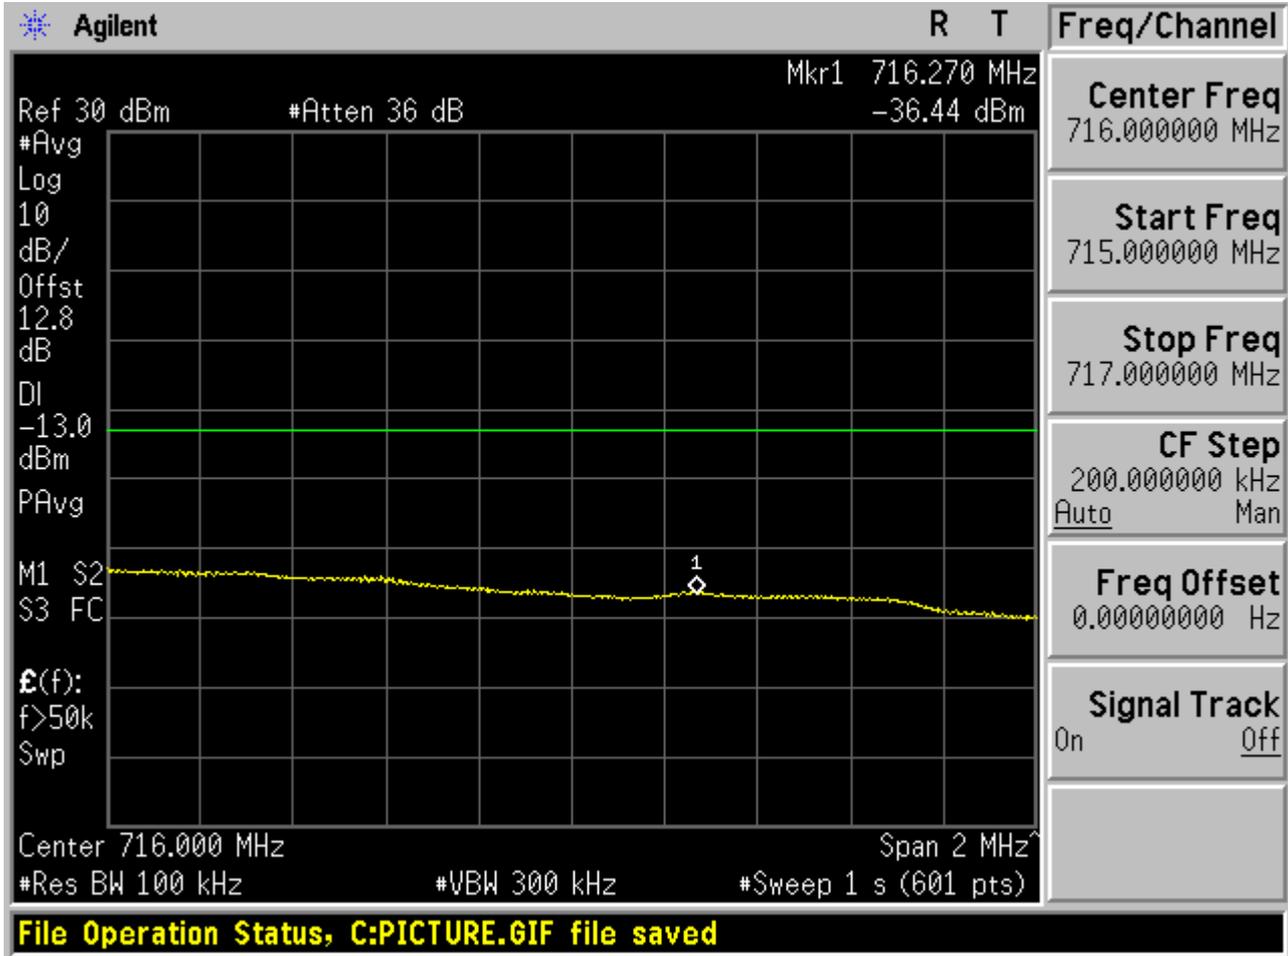



1.2.2.2.4 16QAM /full RBs

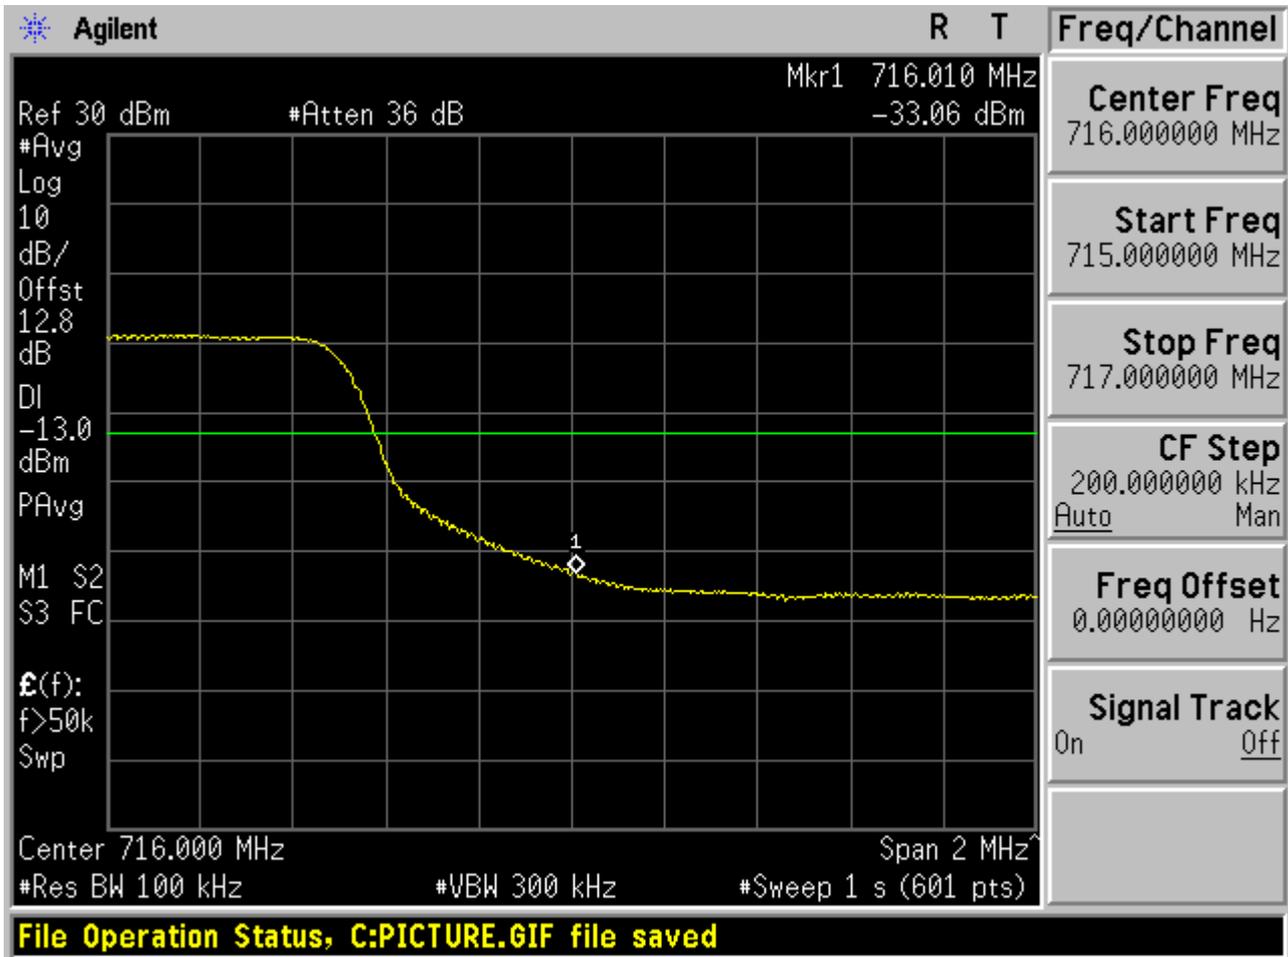

-----END-----



Appendix E

Spurious Emission at Antenna Terminal

According to FCC Part 2.1051 & 27.53(g)



TABLE OF CONTENTS

1 FOR BAND 17 3

1.1 TEST MODE=TM1.....3

1.1.1 Channel Bandwidth = 5 MHz.....3

1.1.1.1 Channel = B.....3

1.1.1.1.1 QPSK/1RBs /RB #03

1.1.1.2 Channel = M.....6

1.1.1.2.1 QPSK/1RBs /RB #06

1.1.1.3 Channel = T9

1.1.1.3.1 QPSK/1RBs /RB #09

1.1.2 Channel Bandwidth = 10 MHz.....12

1.1.2.1 Channel = B.....12

1.1.2.1.1 QPSK/1RBs /RB #012

1.1.2.2 Channel = M.....15

1.1.2.2.1 QPSK/1RBs /RB #015

1.1.2.3 Channel = T18

1.1.2.3.1 QPSK/1RBs /RB #018

1.2 TEST MODE=TM2.....21

1.2.1 Channel Bandwidth = 5 MHz.....21

1.2.1.1 Channel = B.....21

1.2.1.1.1 16QAM/1RBs /RB #021

1.2.1.2 Channel = M.....24

1.2.1.2.1 16QAM/1RBs /RB #024

1.2.1.3 Channel = T27

1.2.1.3.1 16QAM/1RBs /RB #027

1.2.2 Channel Bandwidth = 10 MHz.....30

1.2.2.1 Channel = B.....30

1.2.2.1.1 16QAM/1RBs /RB #030

1.2.2.2 Channel = M.....33

1.2.2.2.1 16QAM/1RBs /RB #033

1.2.2.3 Channel = T36

1.2.2.3.1 16QAM/1RBs /RB #036



1 For Band 17


NOTE1: All relevant operation modes have been tested, and the 1RBs /RB#0 case data is included in this report.


1.1 Test Mode=TM1


1.1.1 Channel Bandwidth = 5 MHz

1.1.1.1 Channel = B

1.1.1.1.1 QPSK/1RBs /RB #0

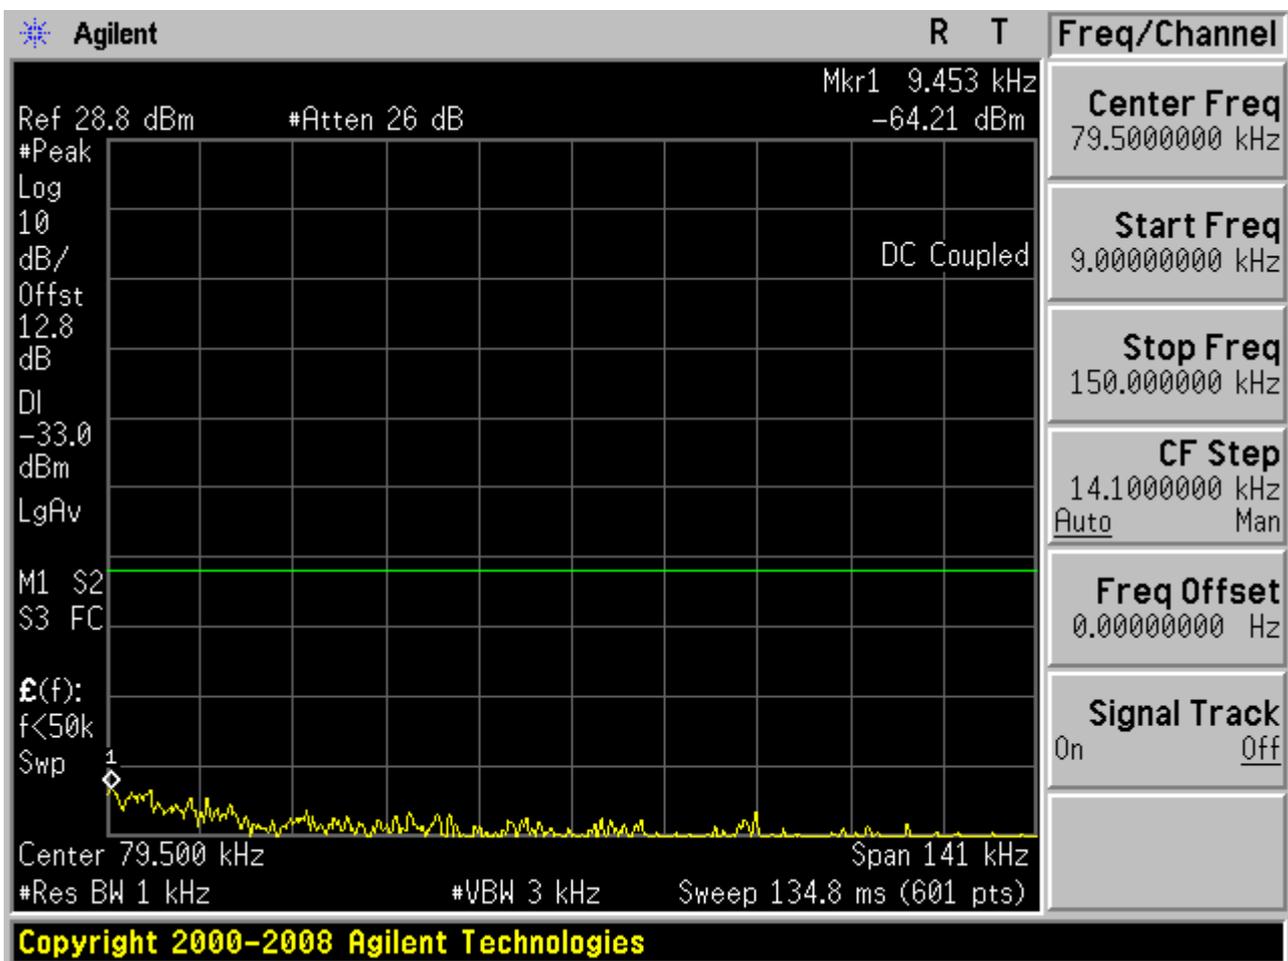

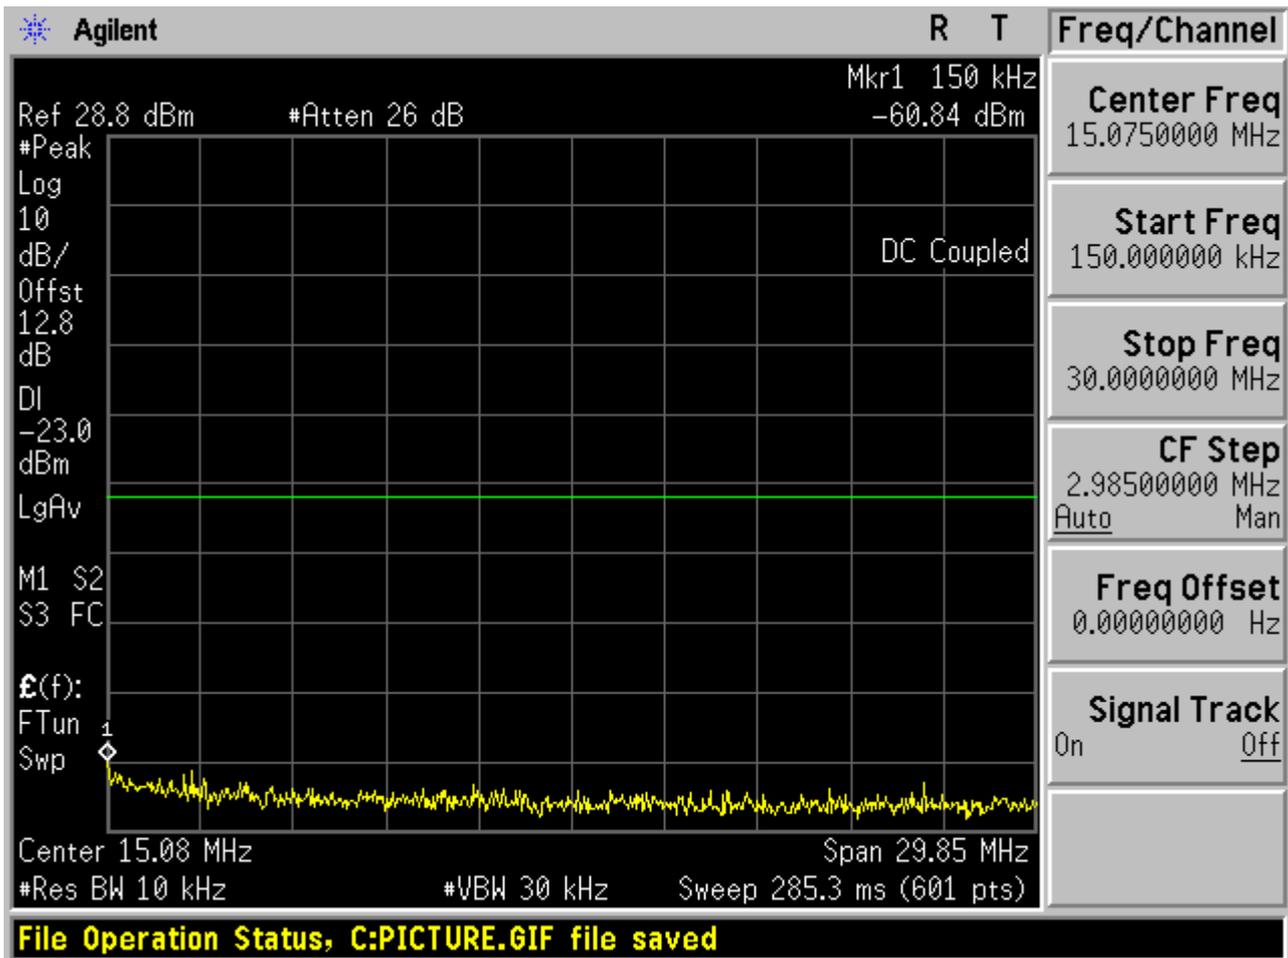


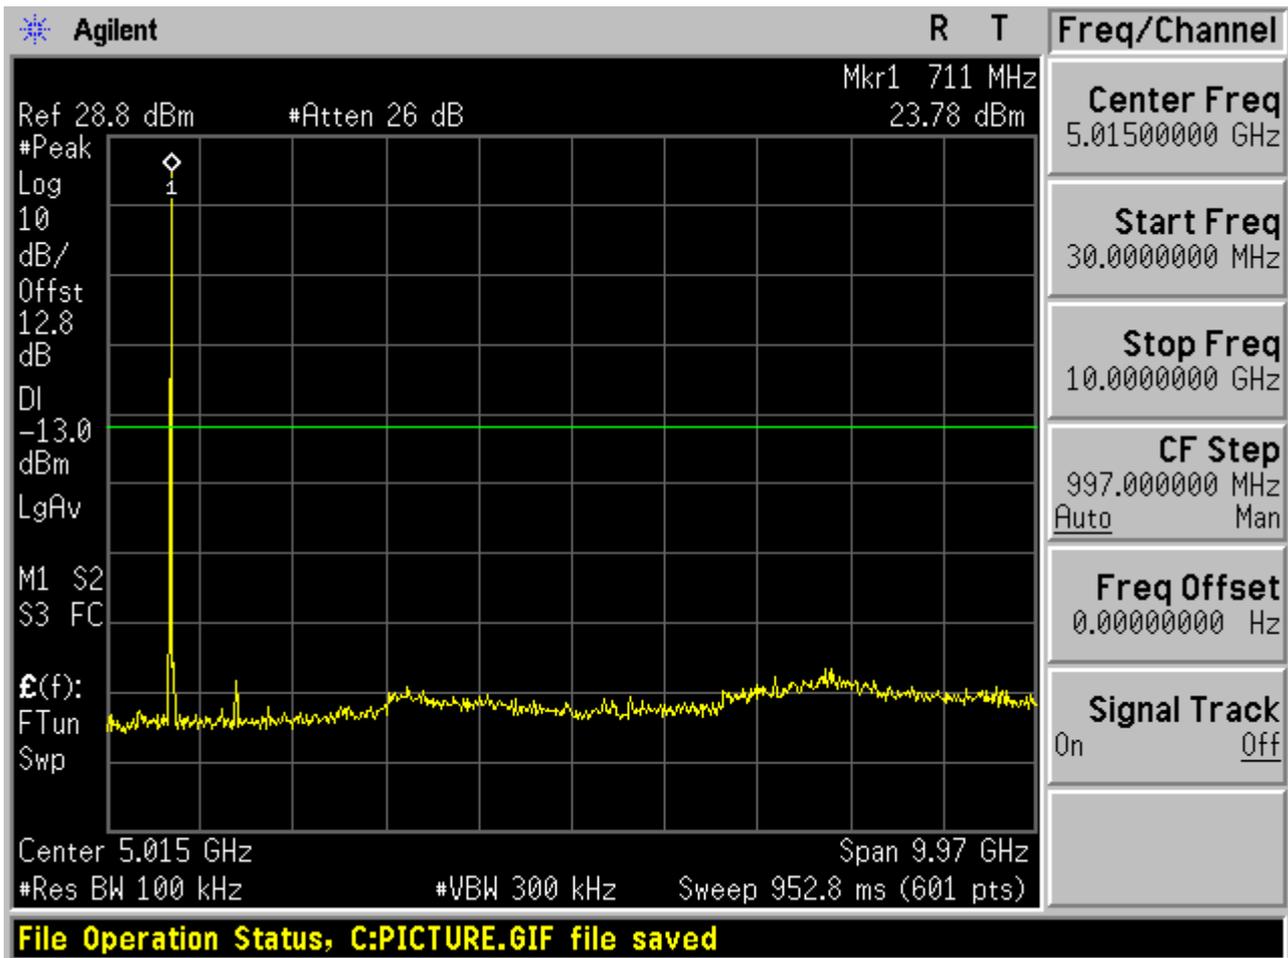




1.1.1.2 Channel = M

1.1.1.2.1 QPSK/1RBs /RB #0

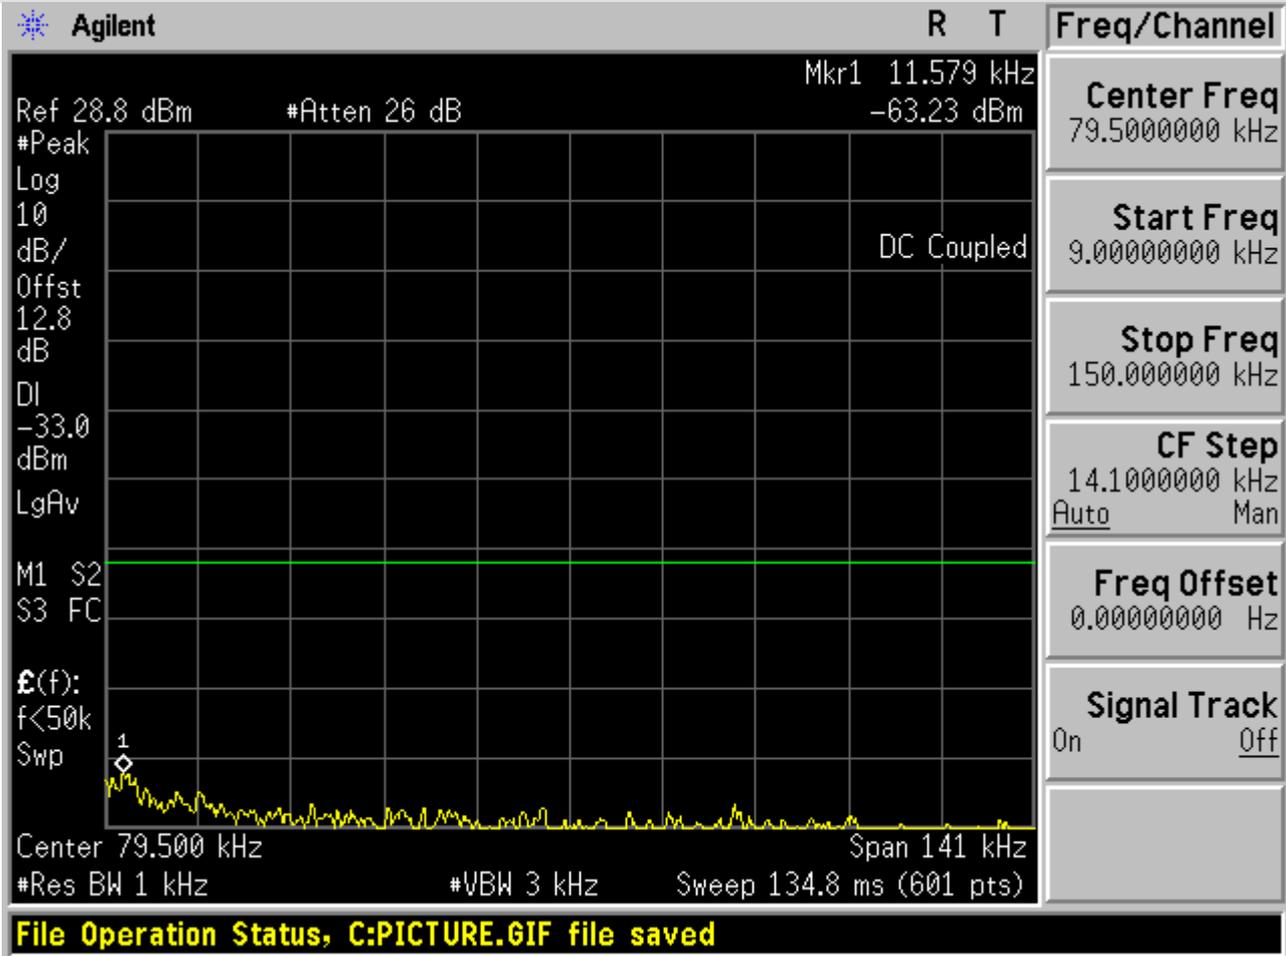


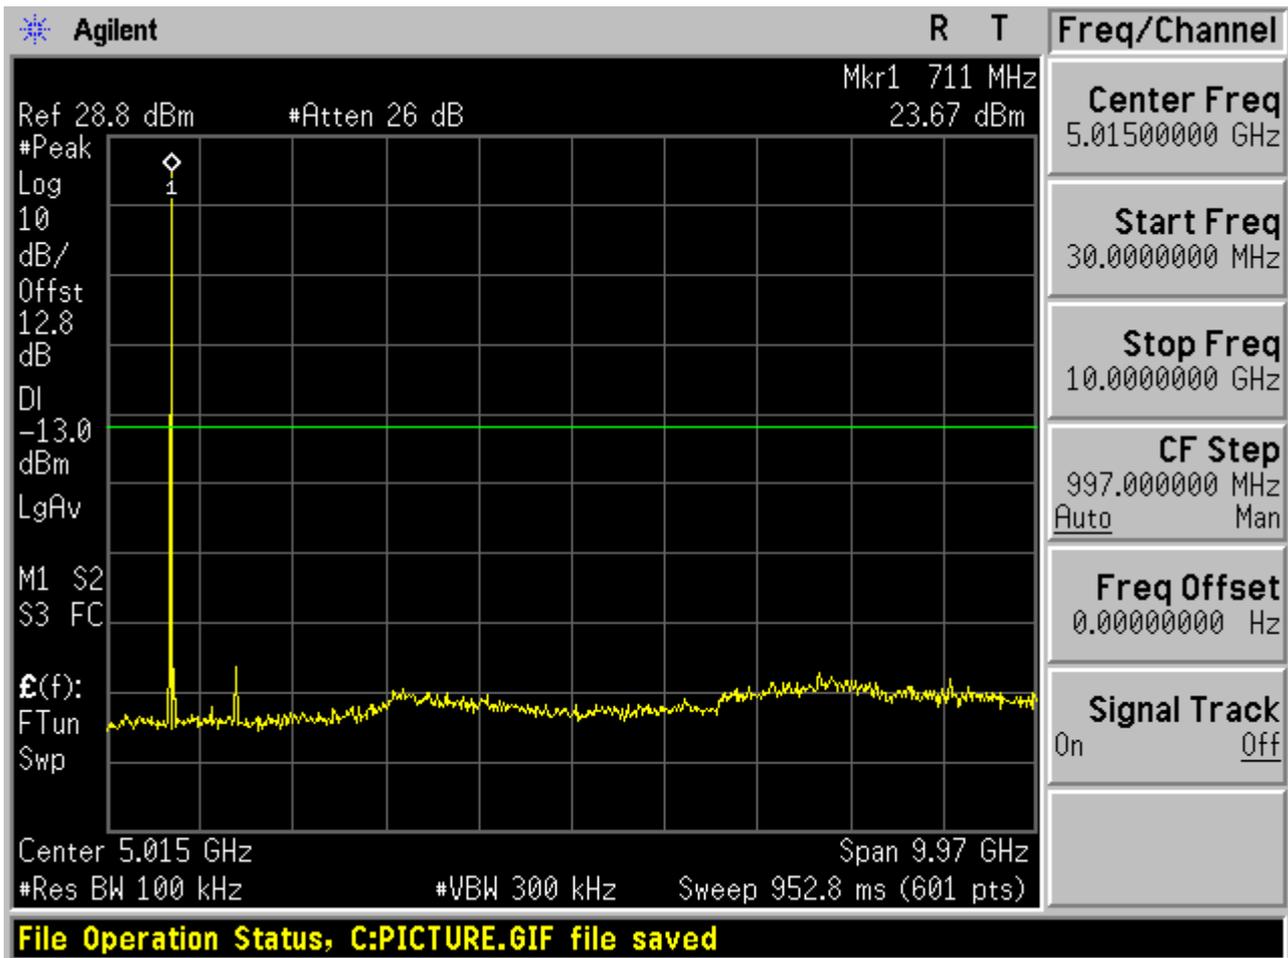





1.1.1.3 Channel = T

1.1.1.3.1 QPSK/1RBs /RB #0

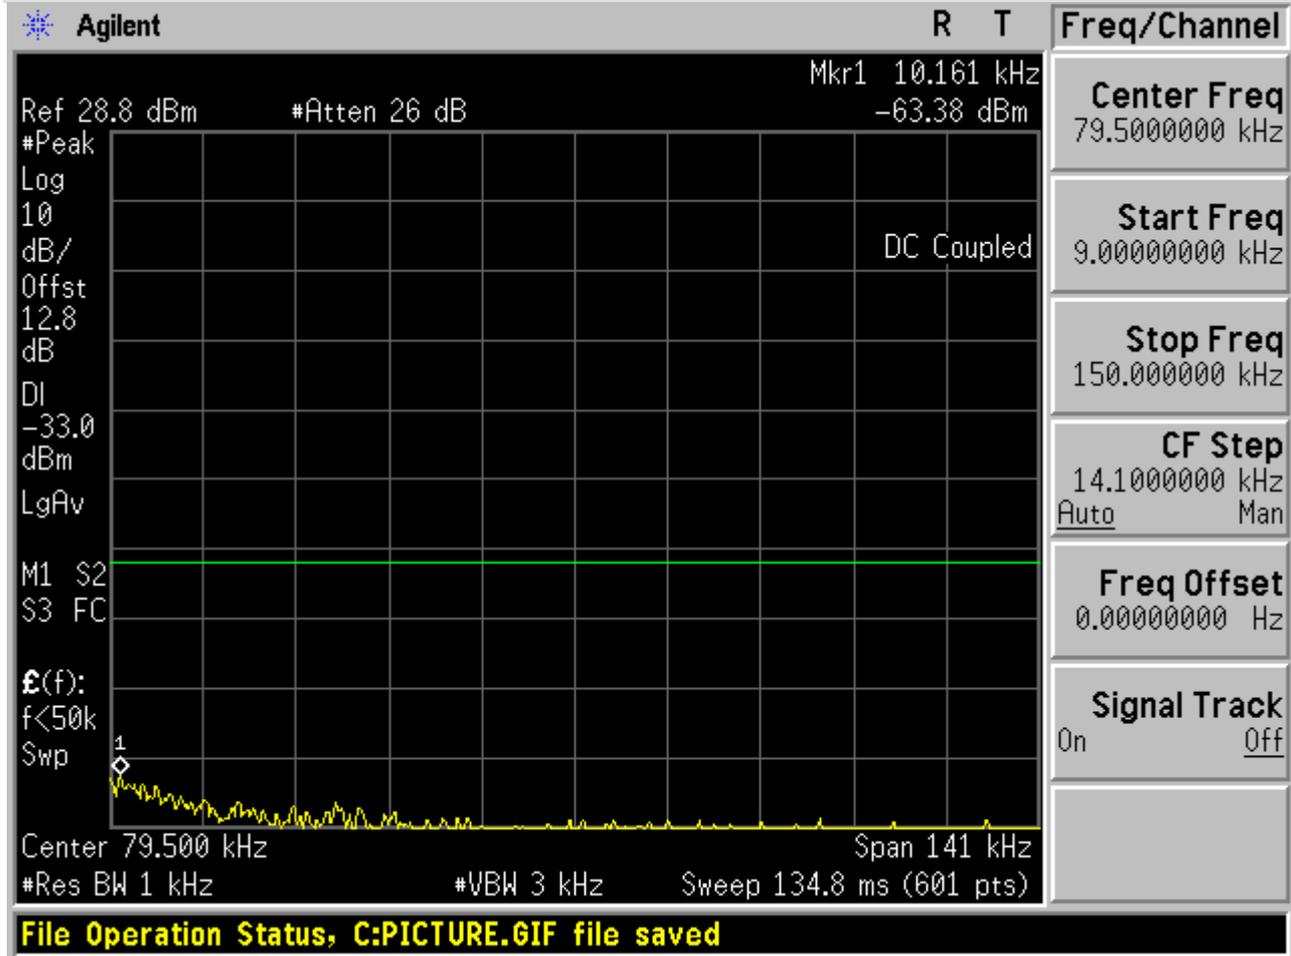

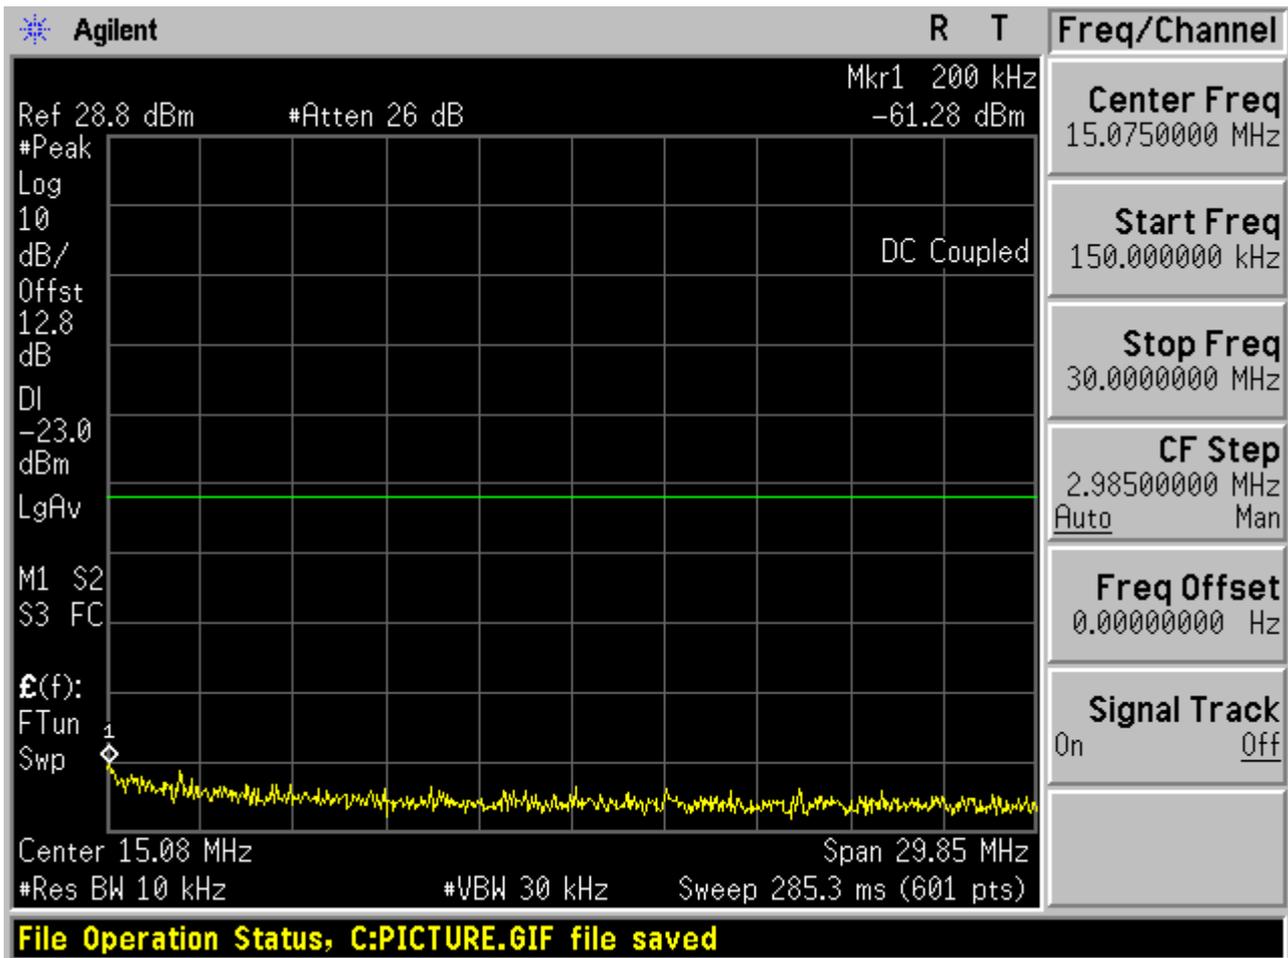

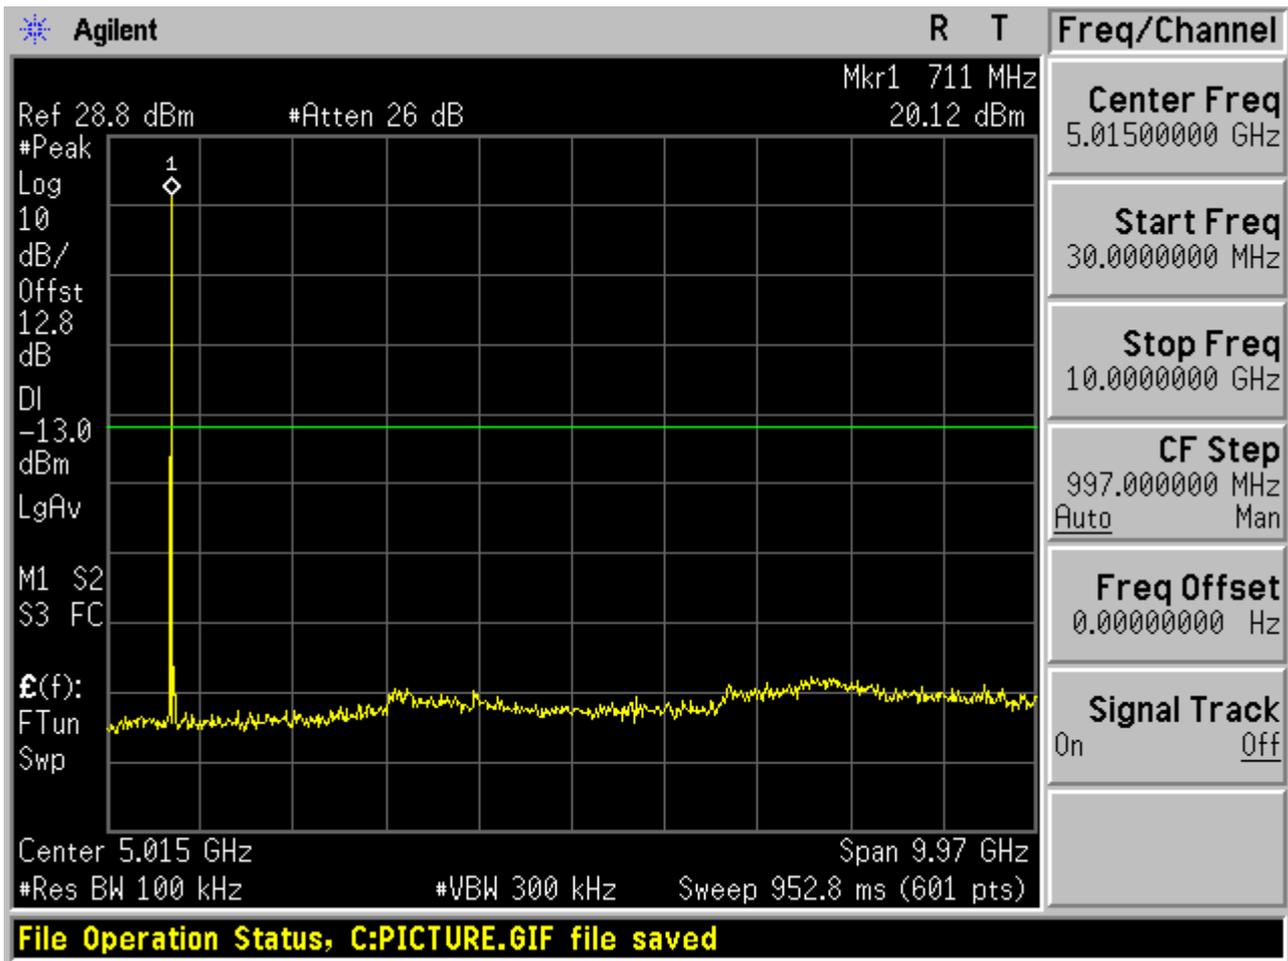






1.1.2 Channel Bandwidth = 10 MHz

1.1.2.1 Channel = B

1.1.2.1.1 QPSK/1RBs /RB #0

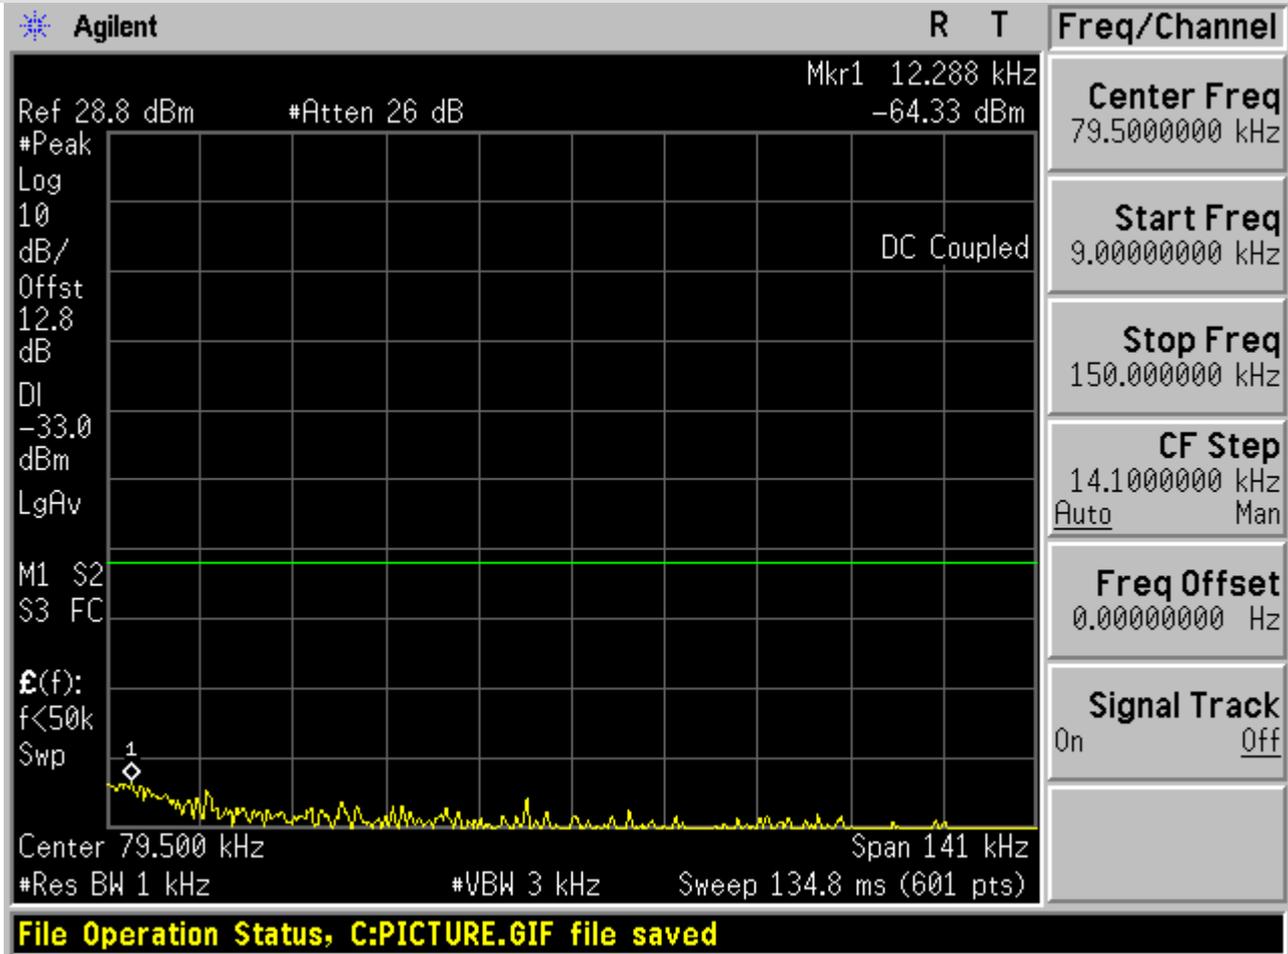

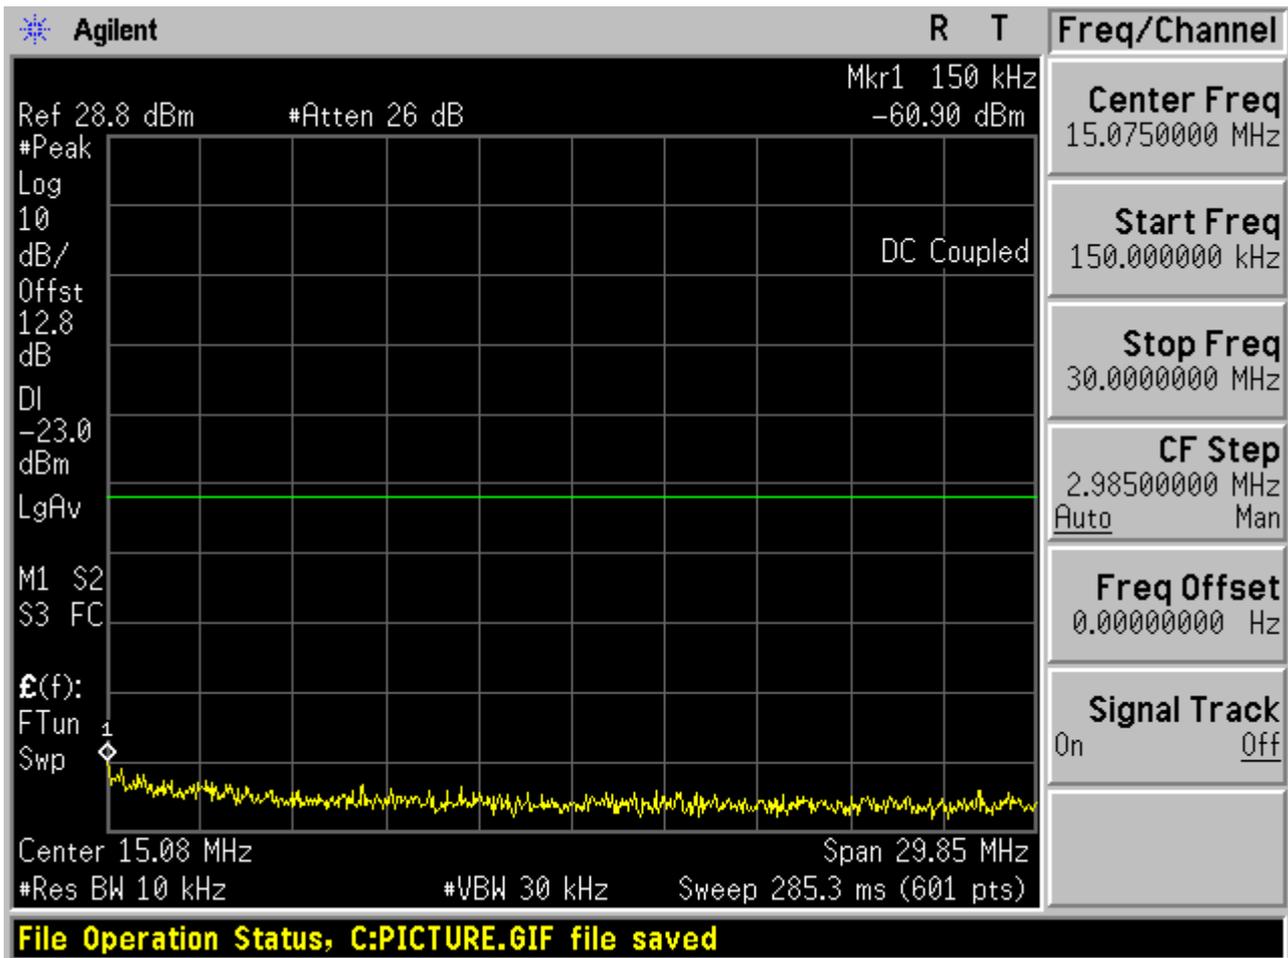


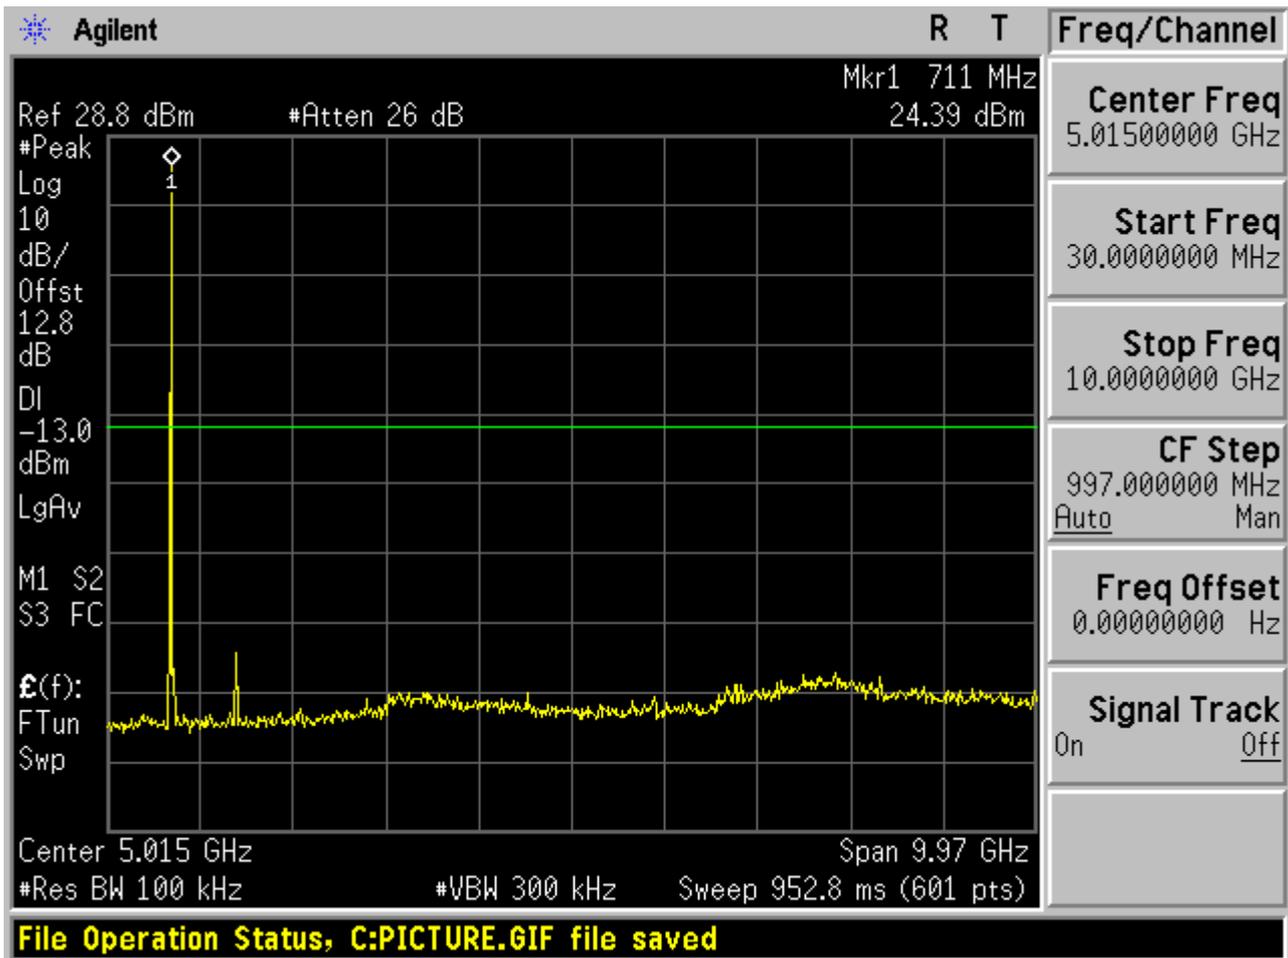





1.1.2.2 Channel = M

1.1.2.2.1 QPSK/1RBs /RB #0

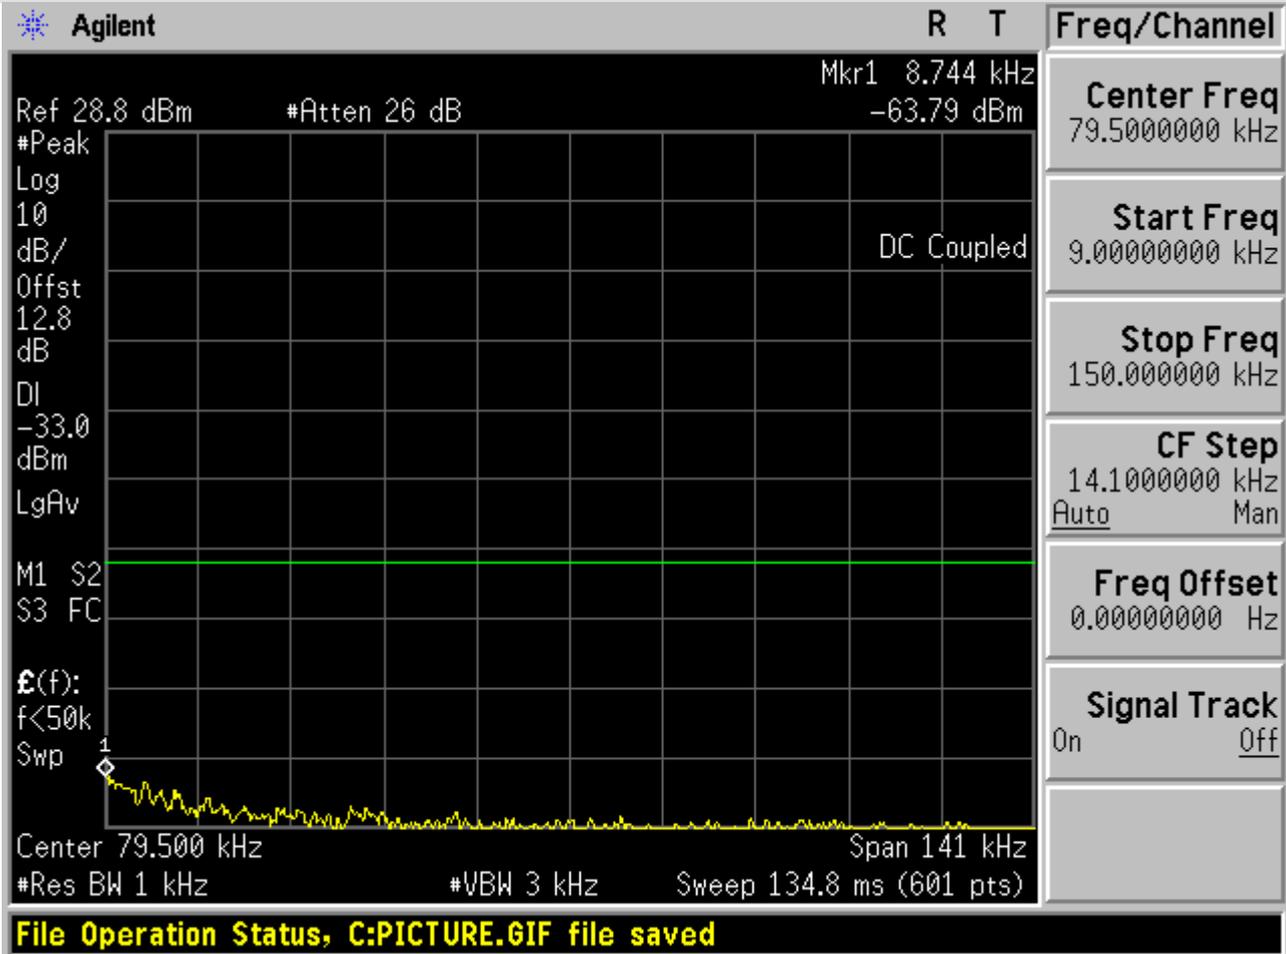

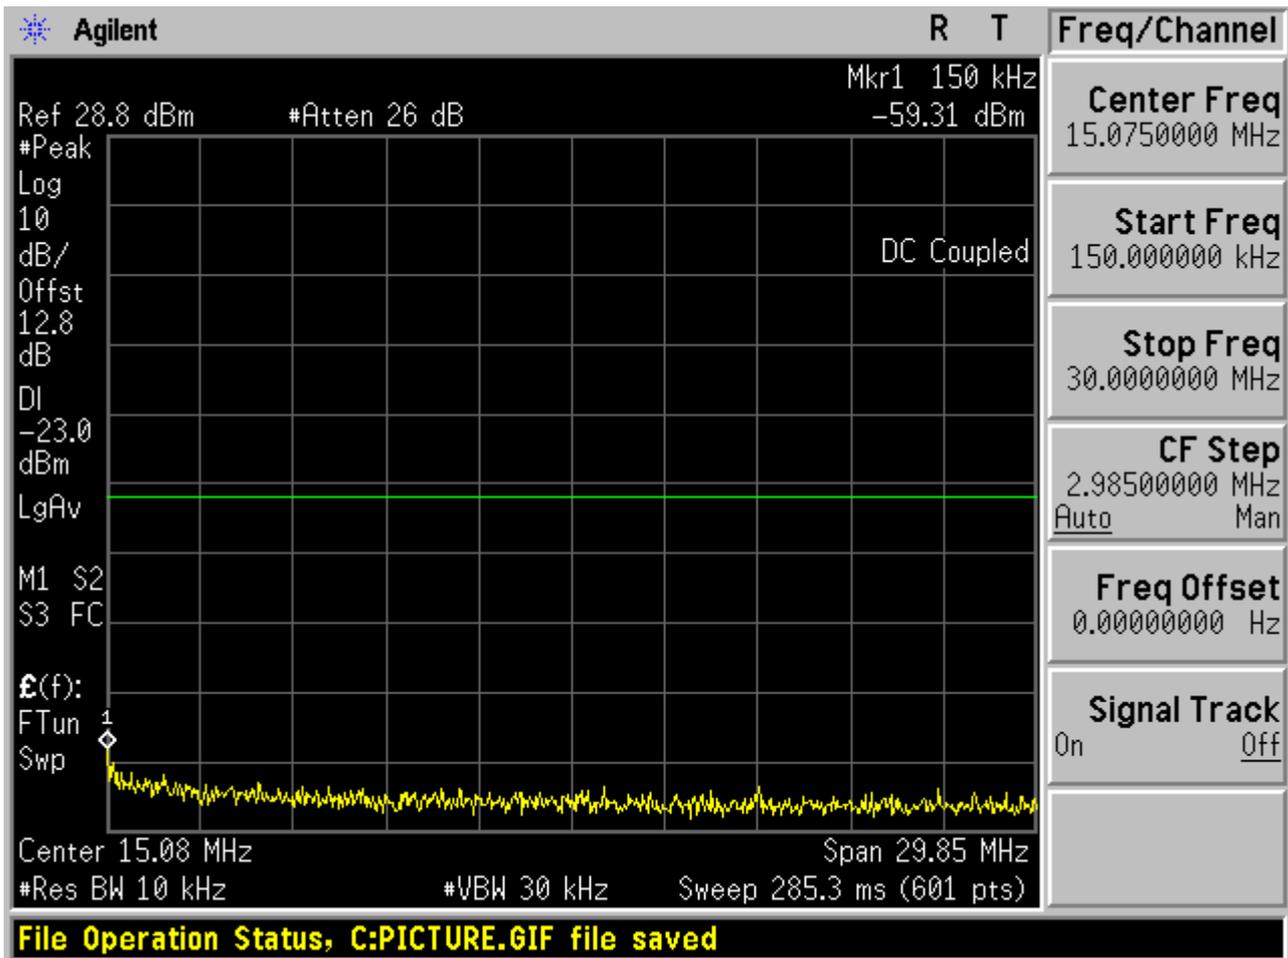


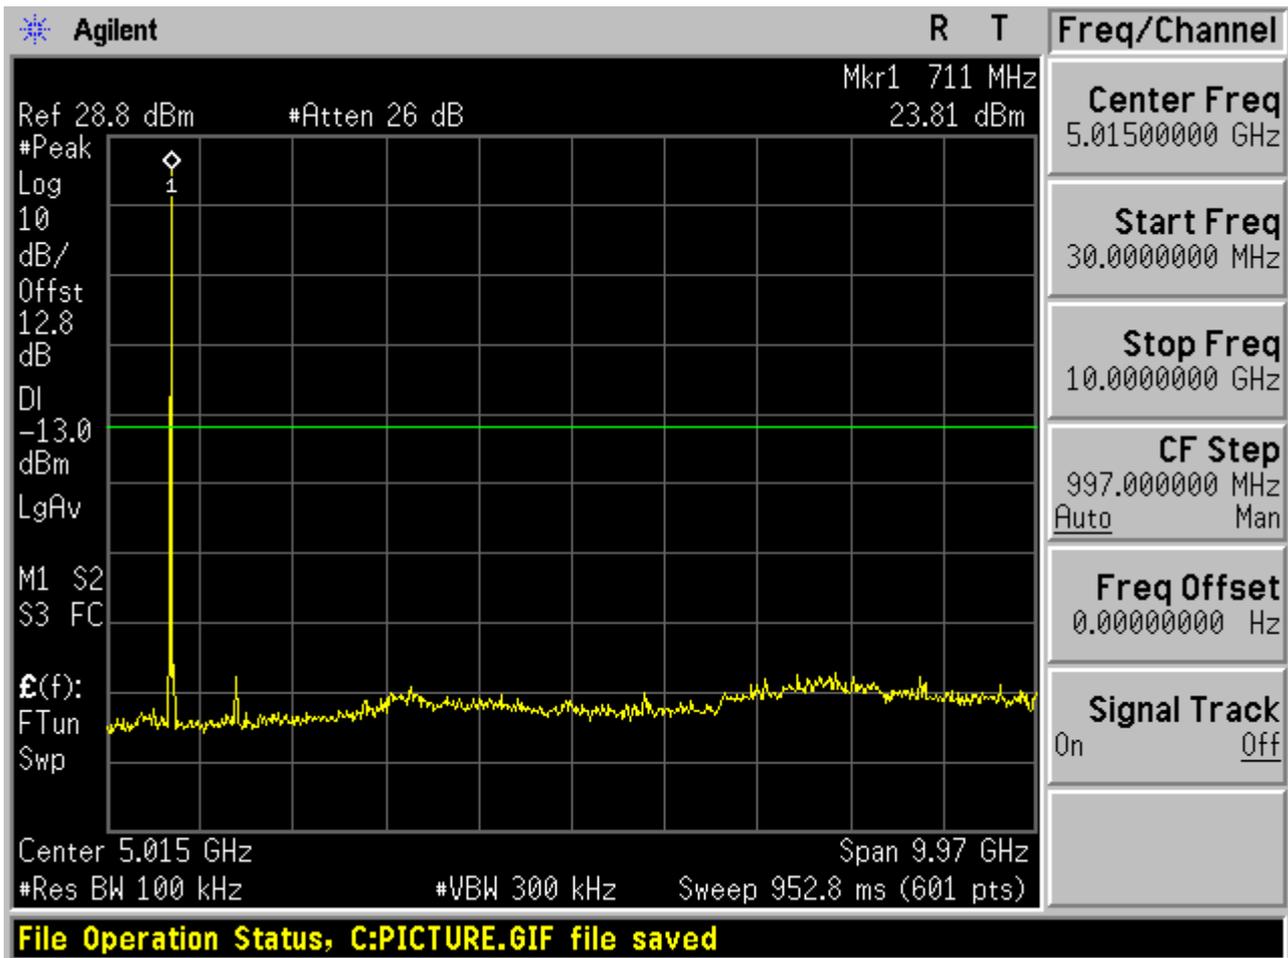





1.1.2.3 Channel = T

1.1.2.3.1 QPSK/1RBs /RB #0

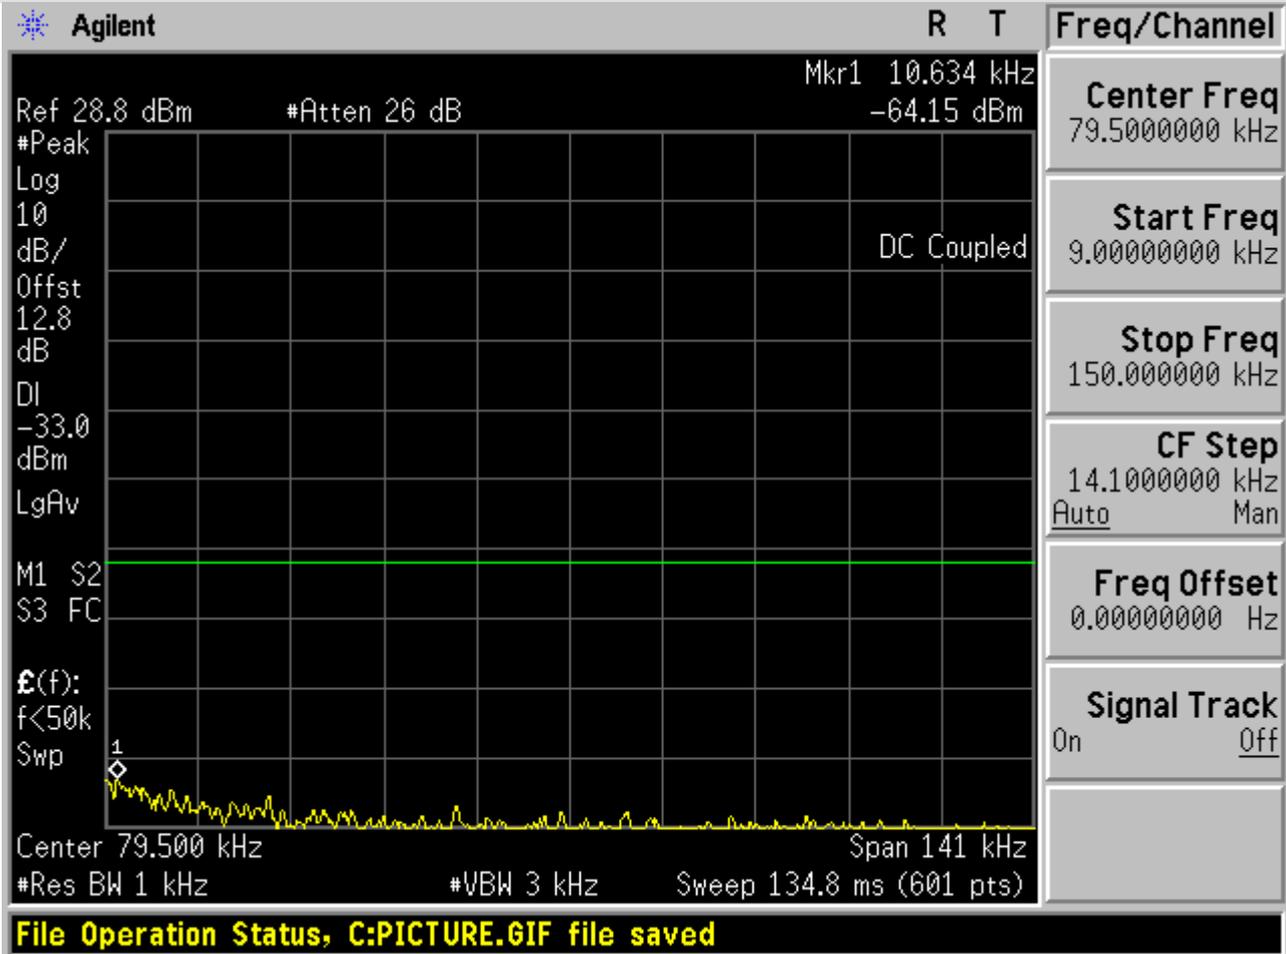

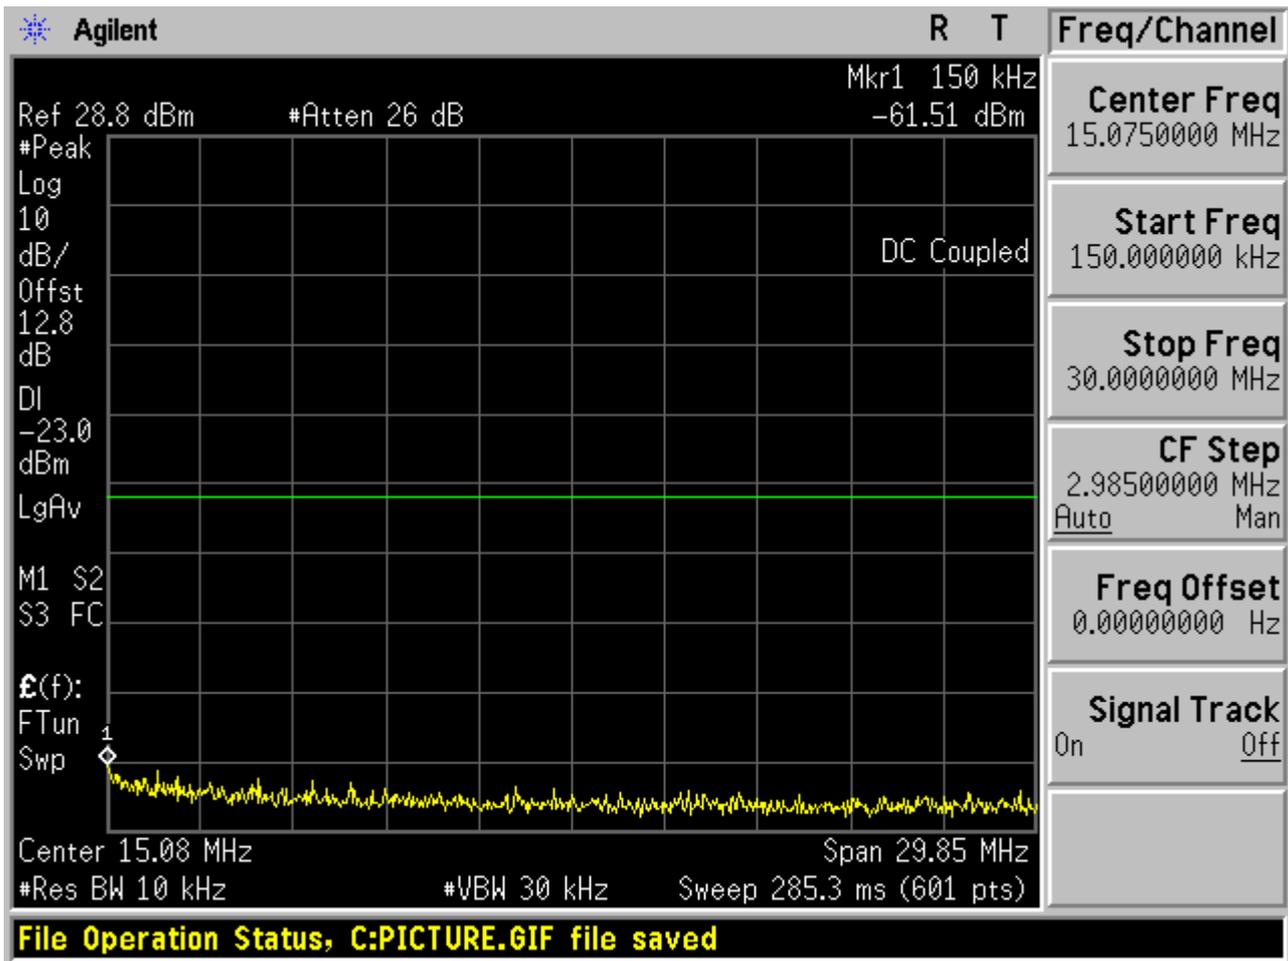

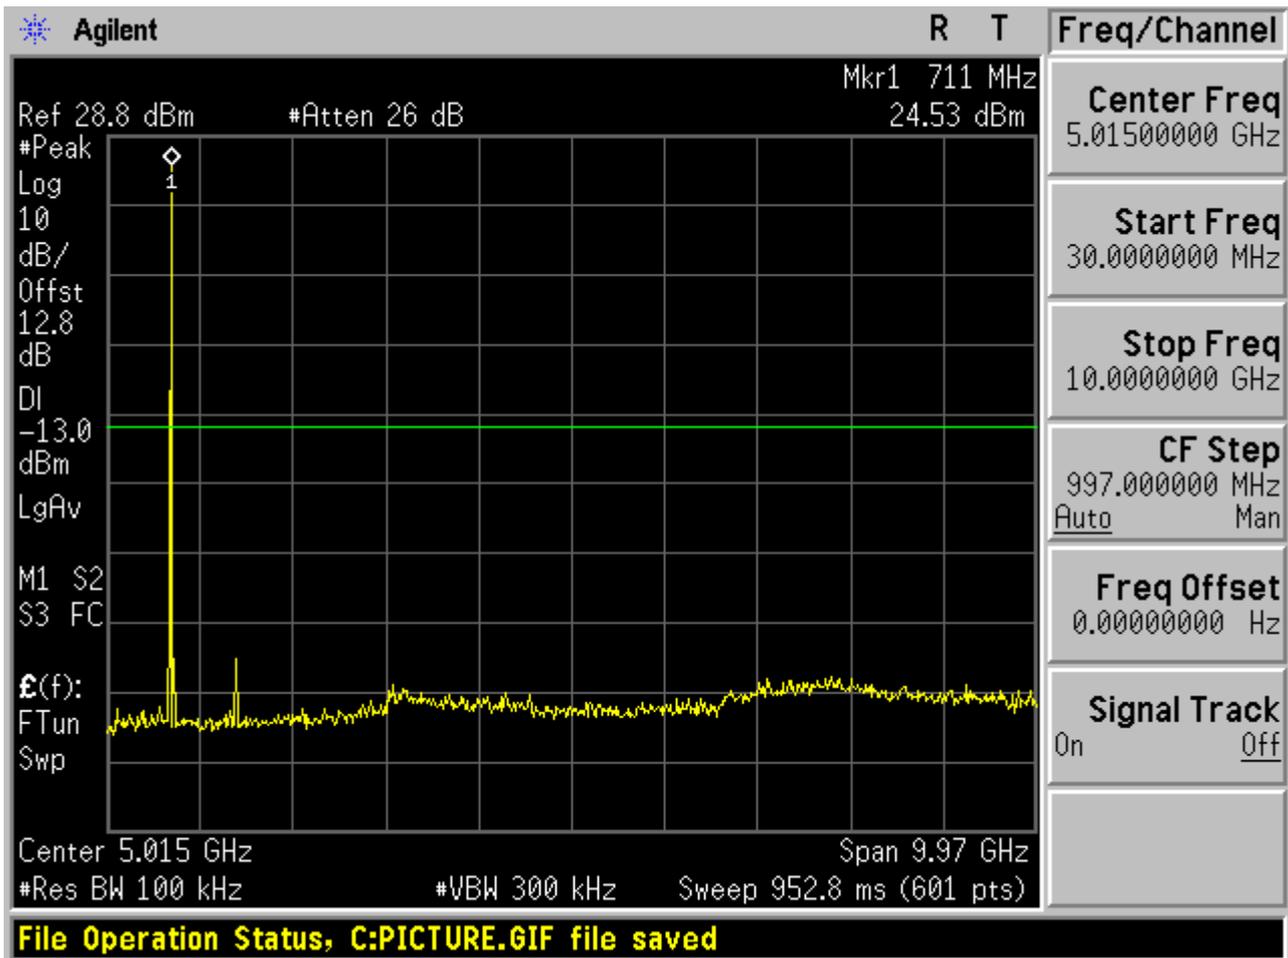





1.2 Test Mode=TM2


1.2.1 Channel Bandwidth = 5 MHz

1.2.1.1 Channel = B

1.2.1.1.1 16QAM/1RBs /RB #0

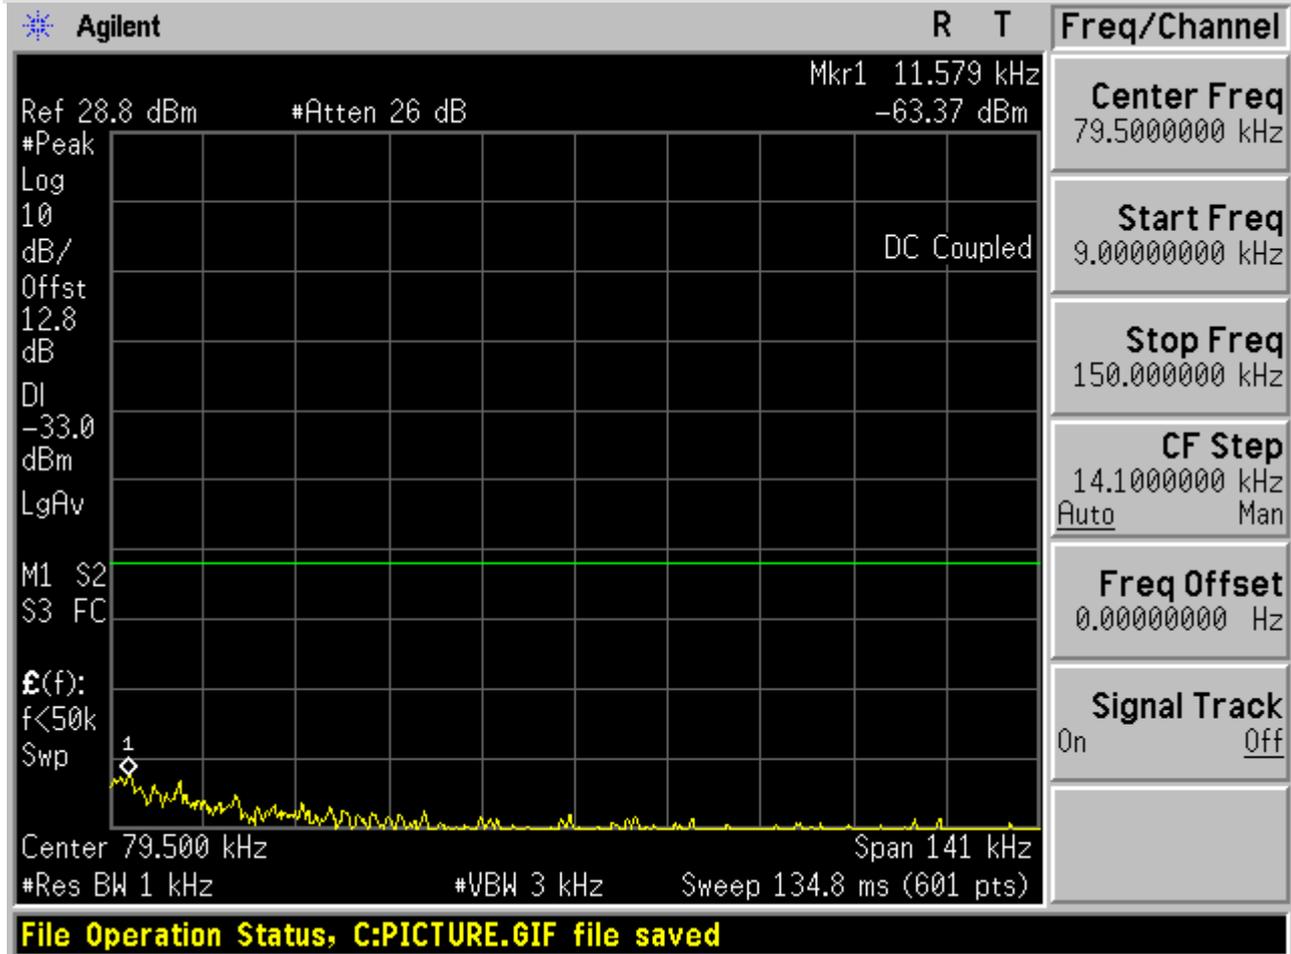

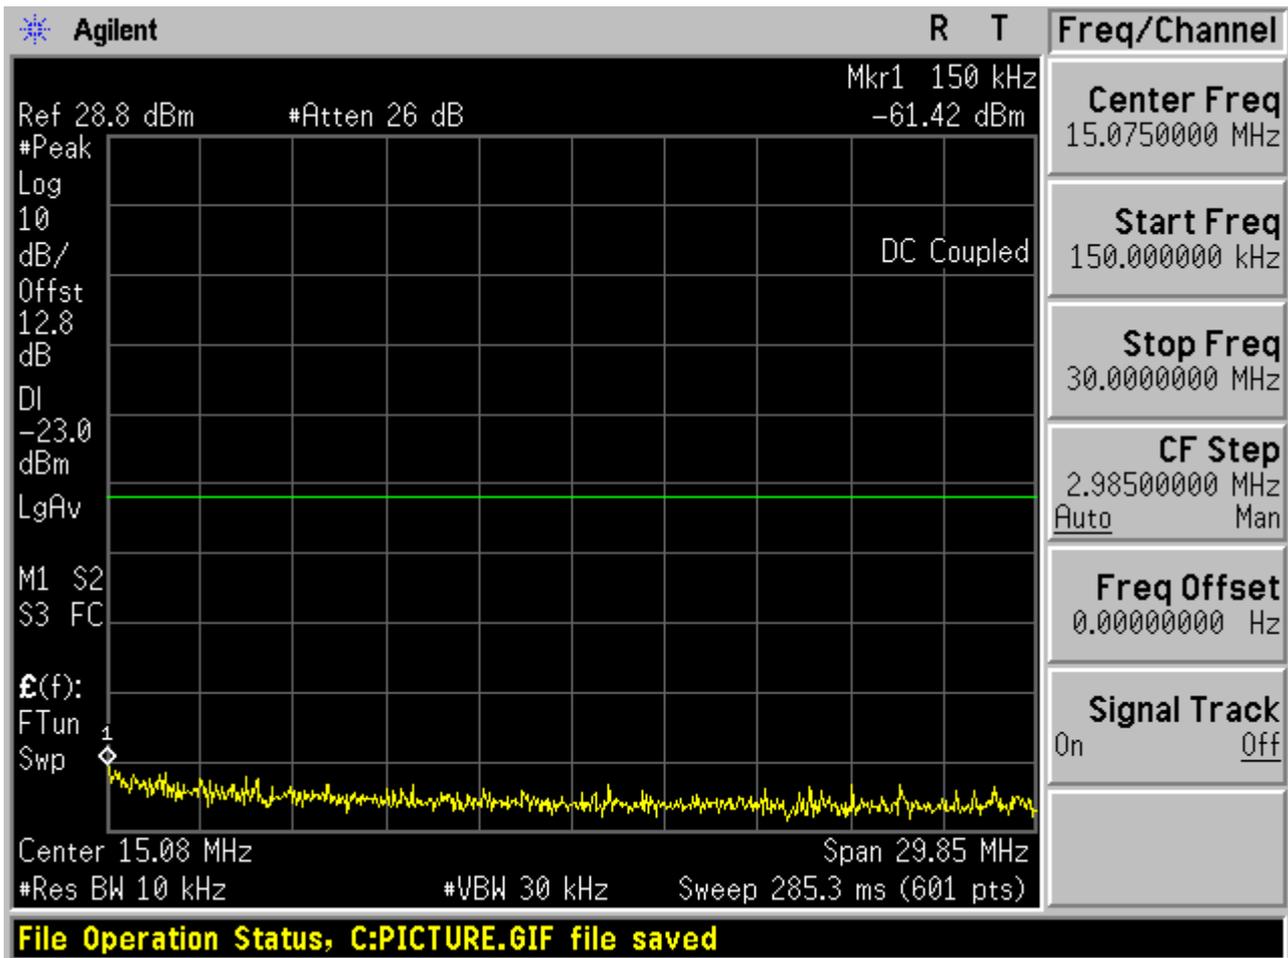


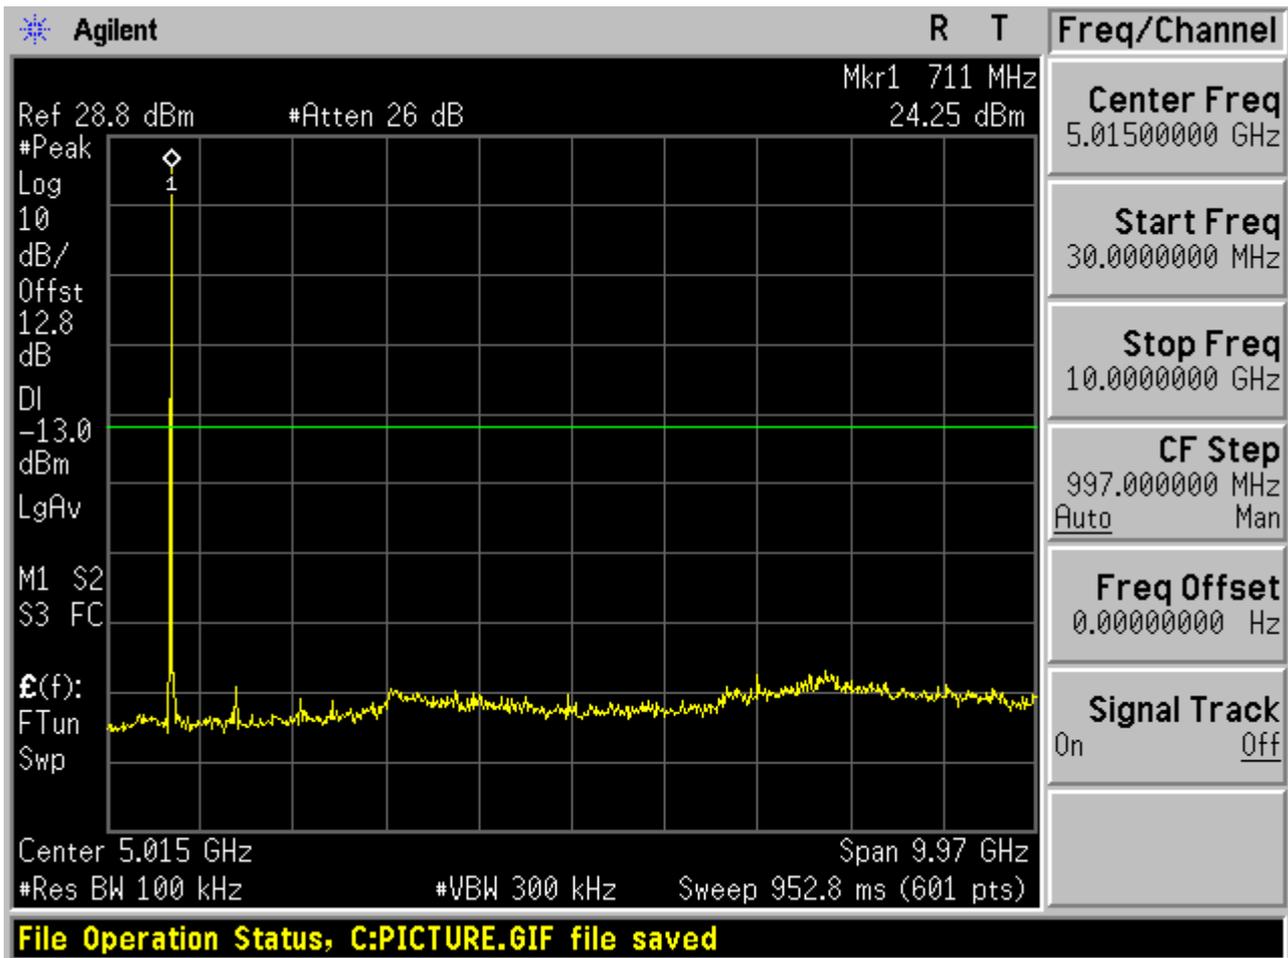





1.2.1.2 Channel = M

1.2.1.2.1 16QAM/1RBs /RB #0

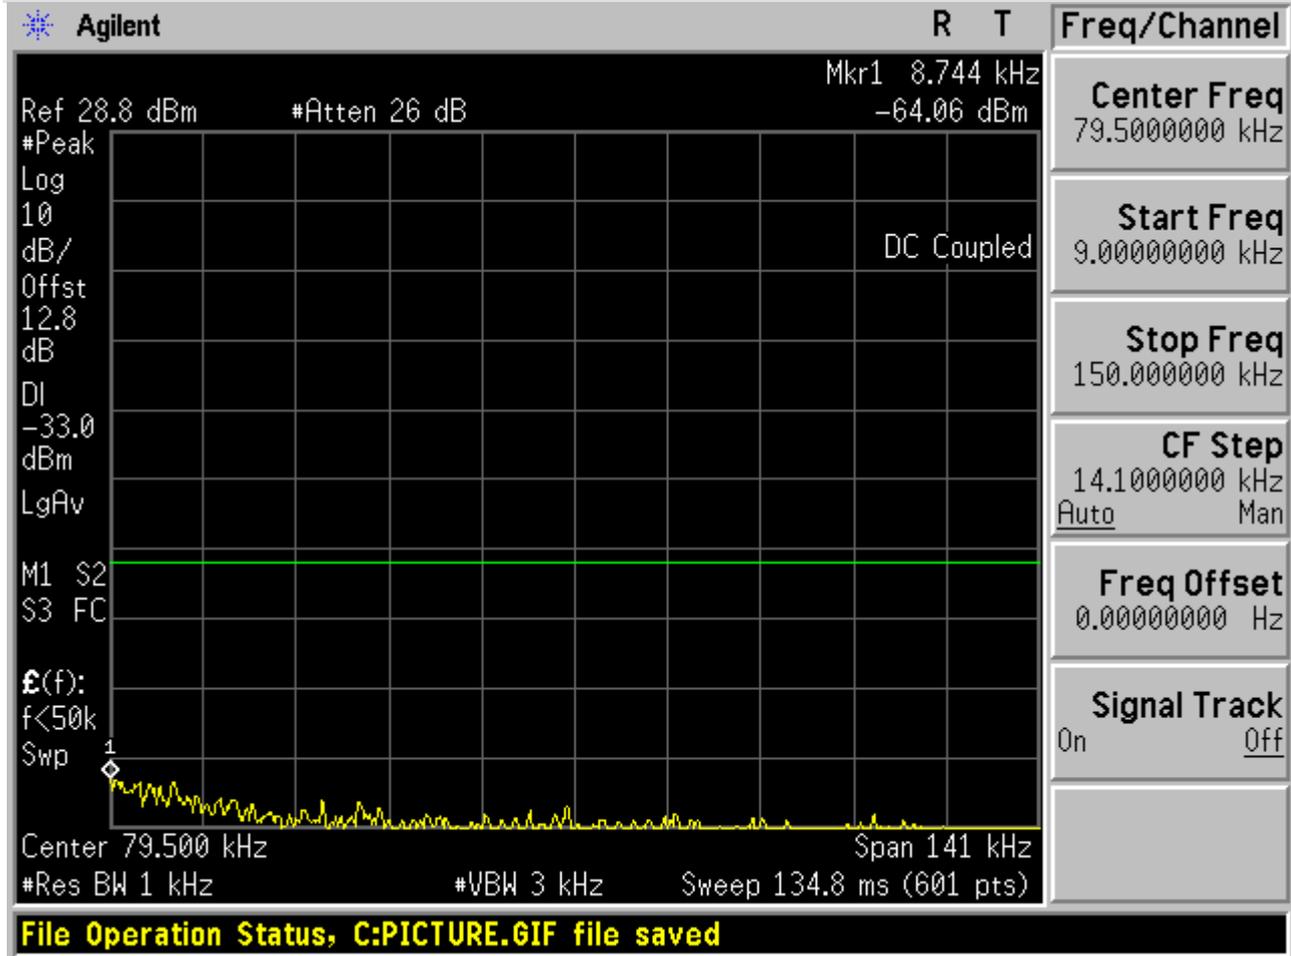

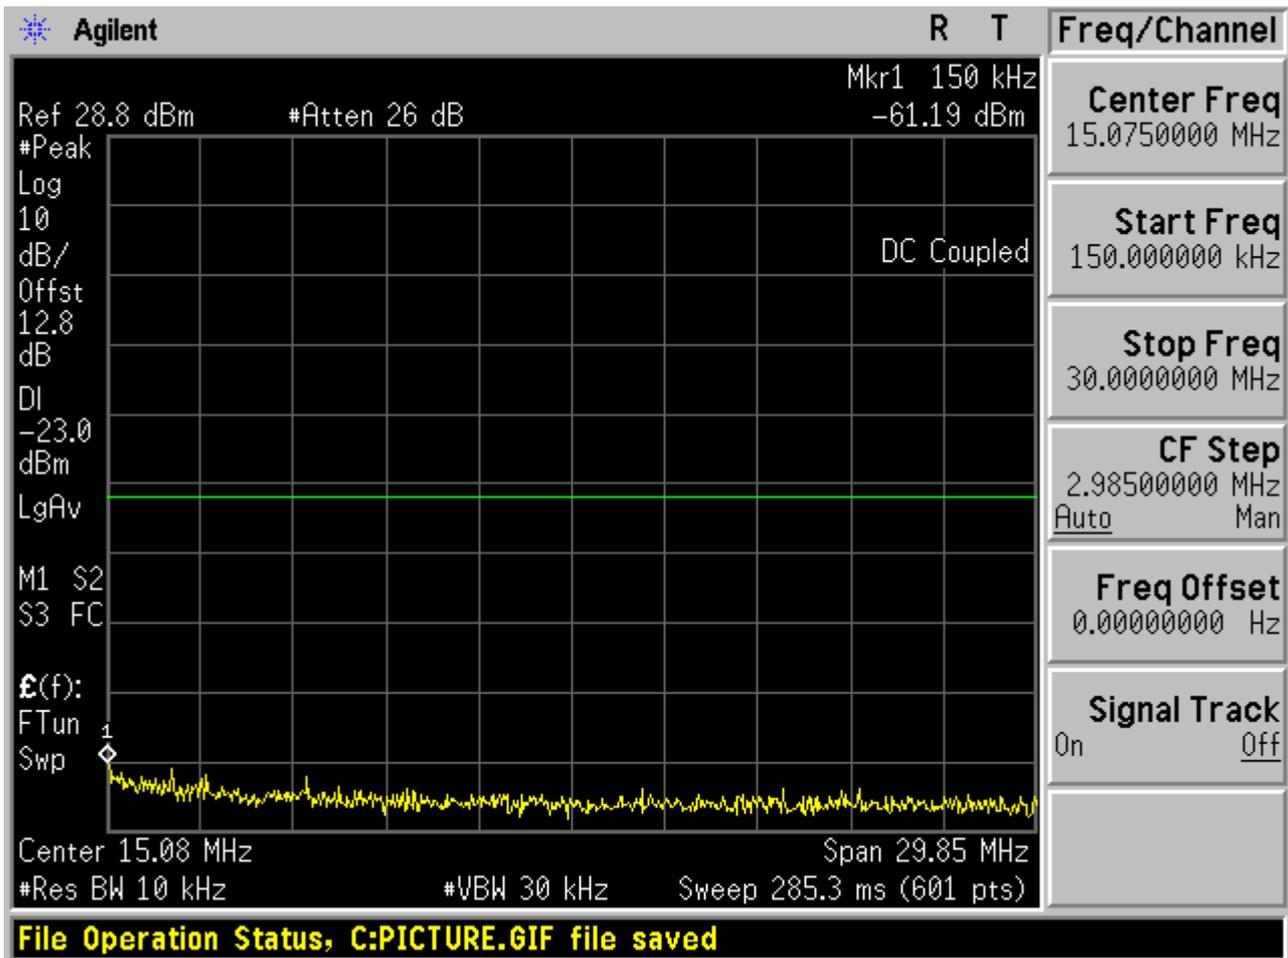


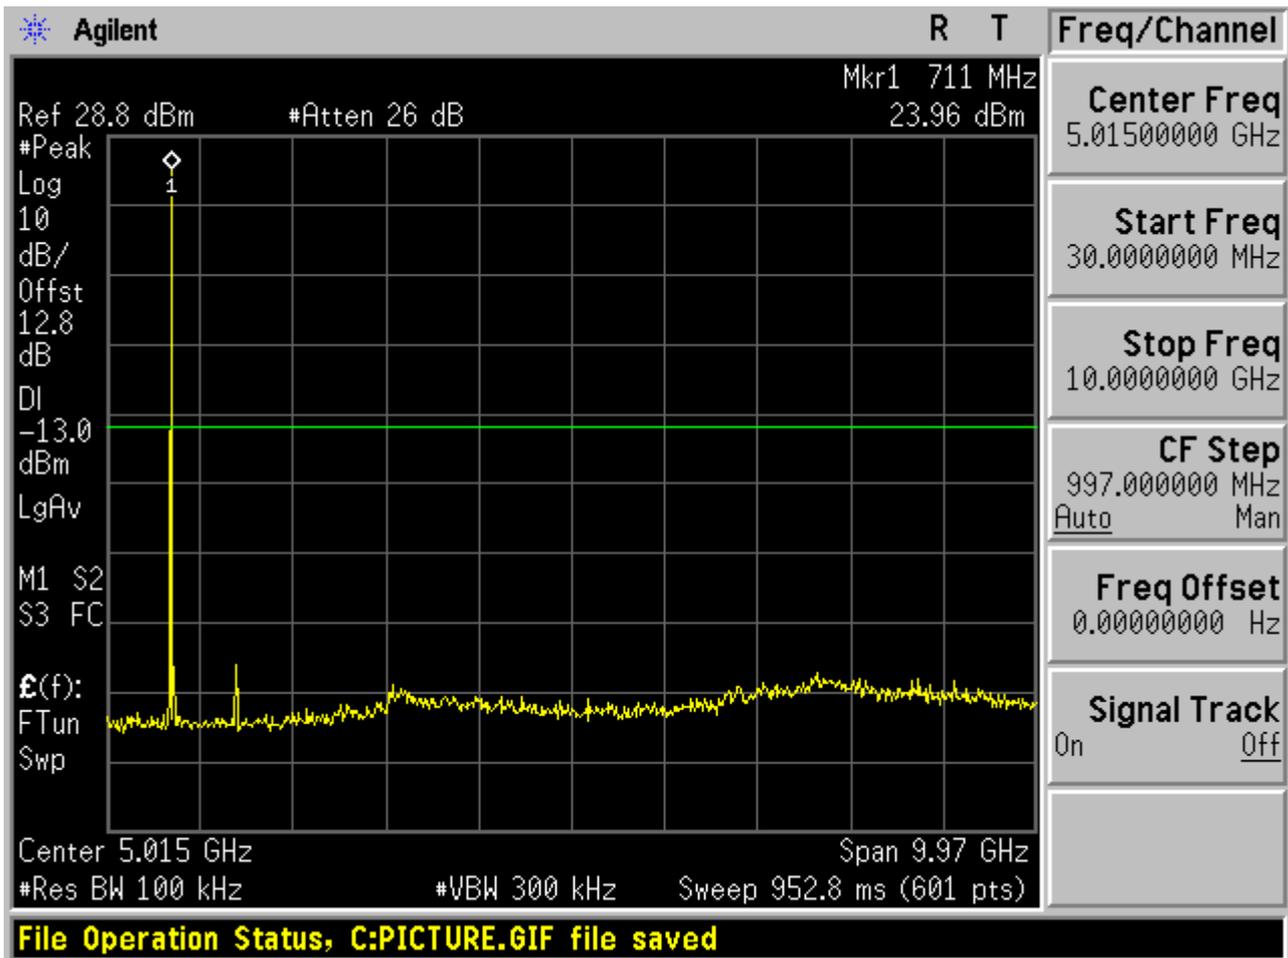





1.2.1.3 Channel = T

1.2.1.3.1 16QAM/1RBs /RB #0

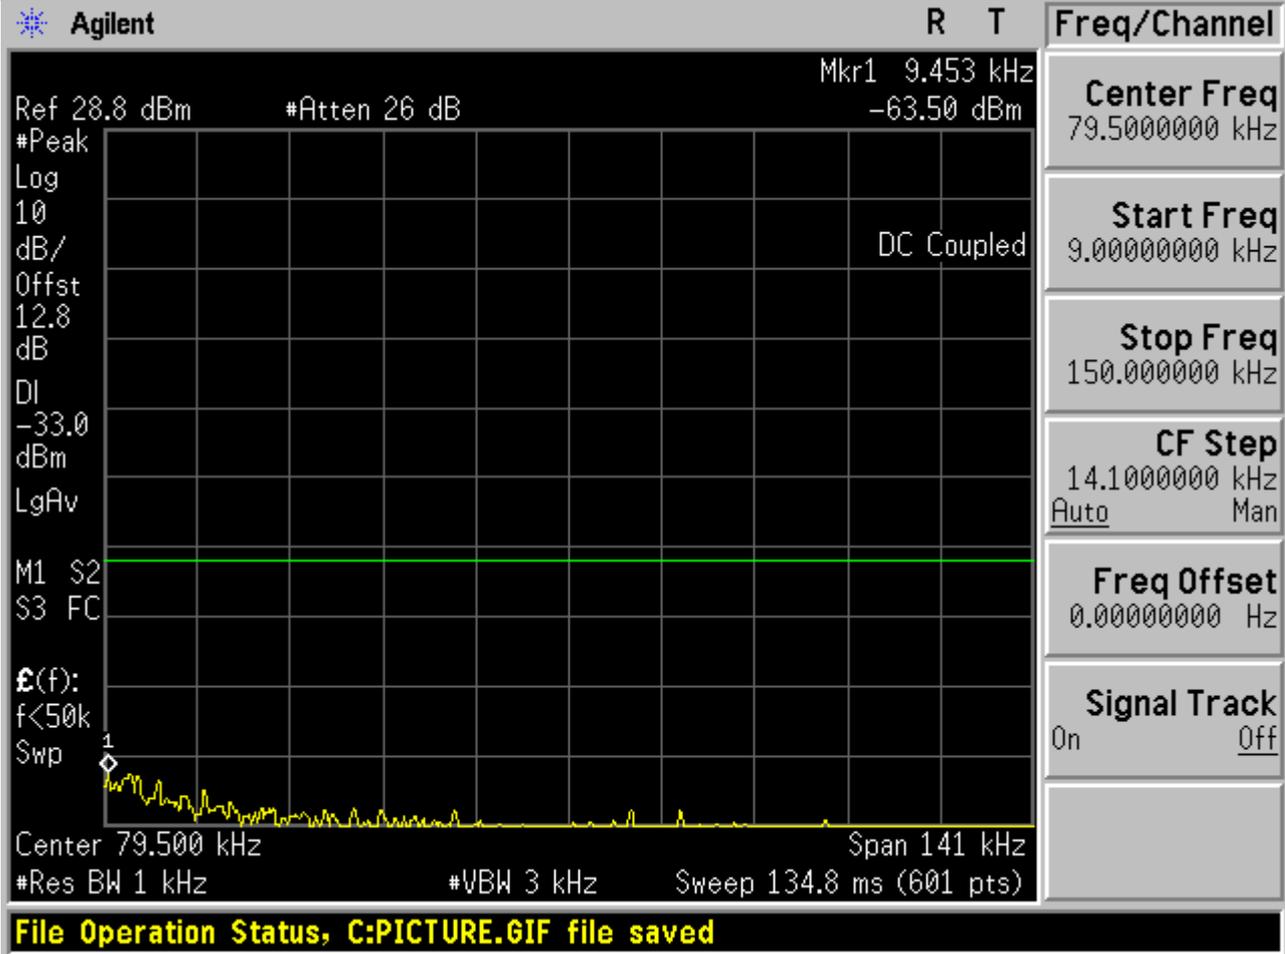

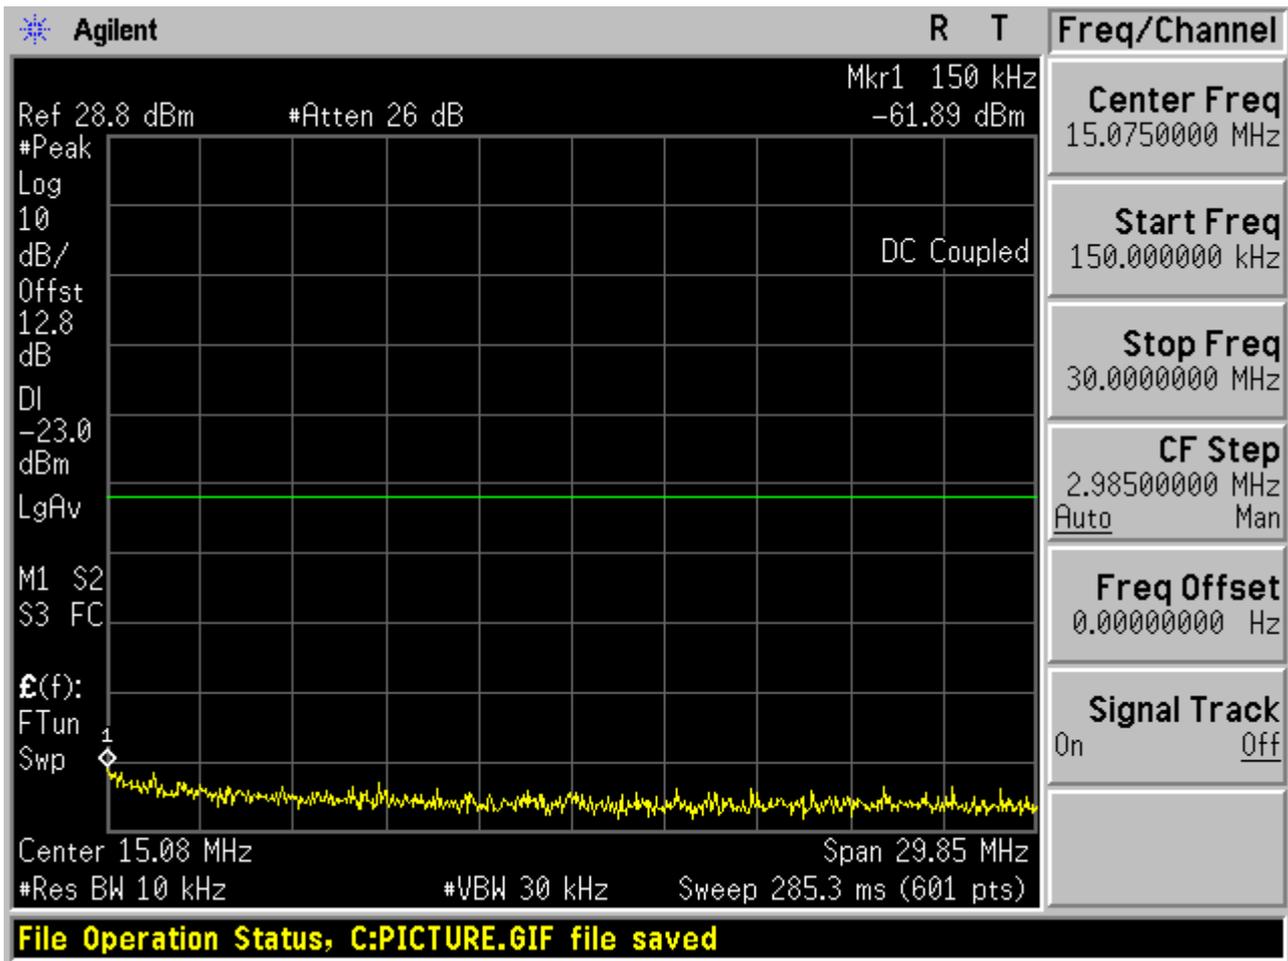

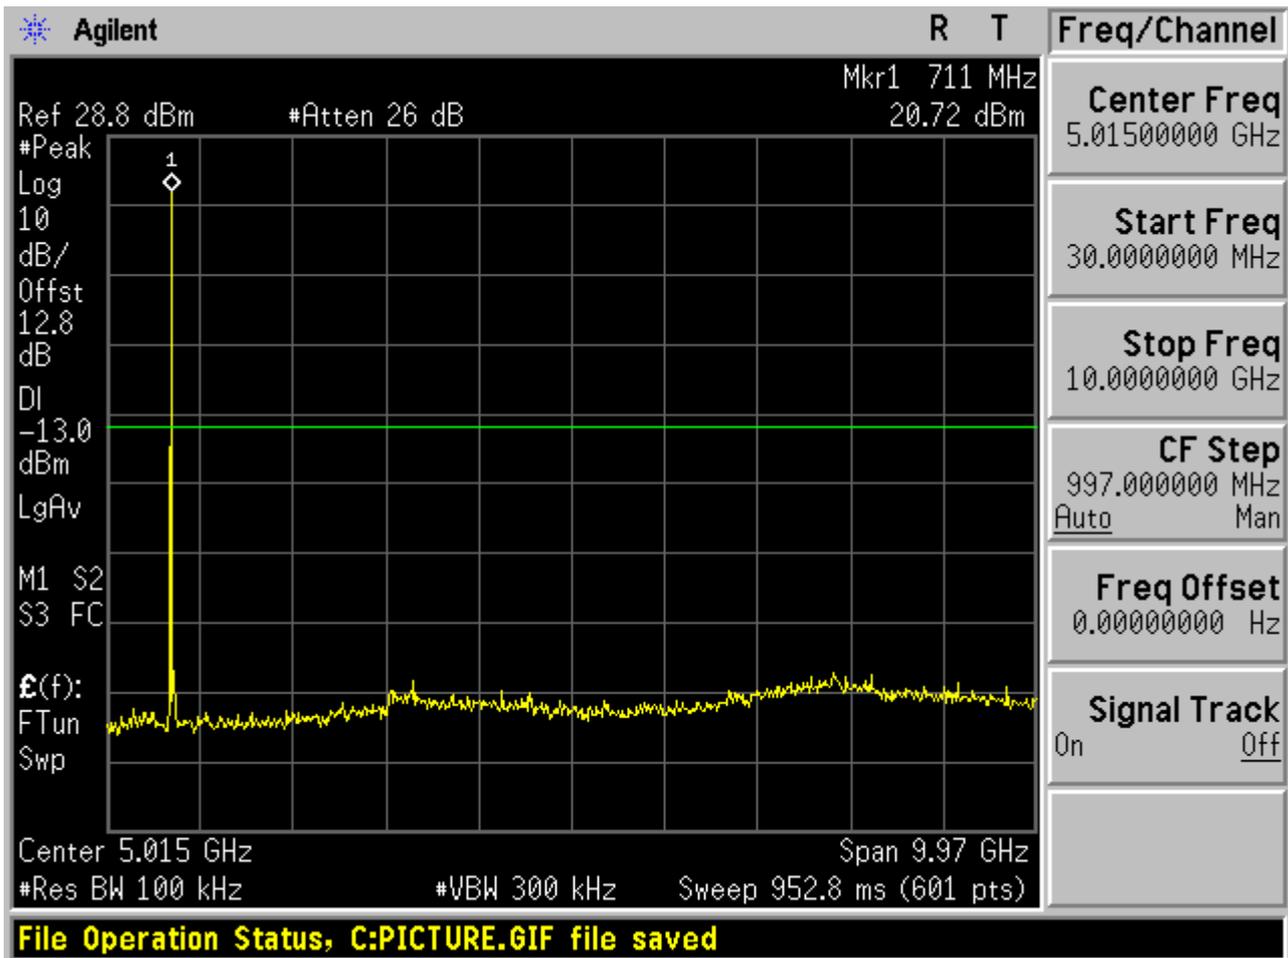






1.2.2 Channel Bandwidth = 10 MHz

1.2.2.1 Channel = B

1.2.2.1.1 16QAM/1RBs /RB #0

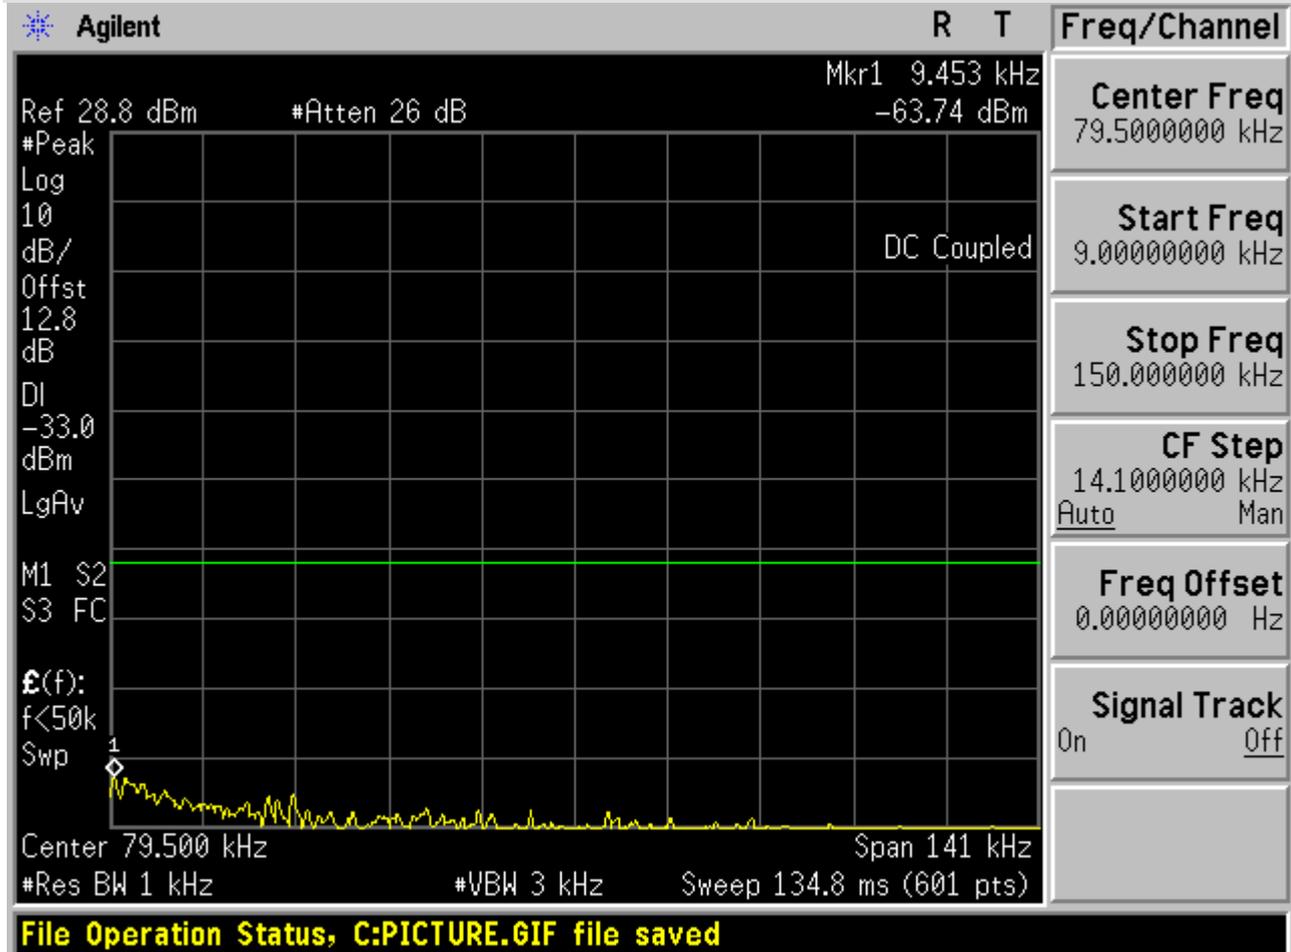

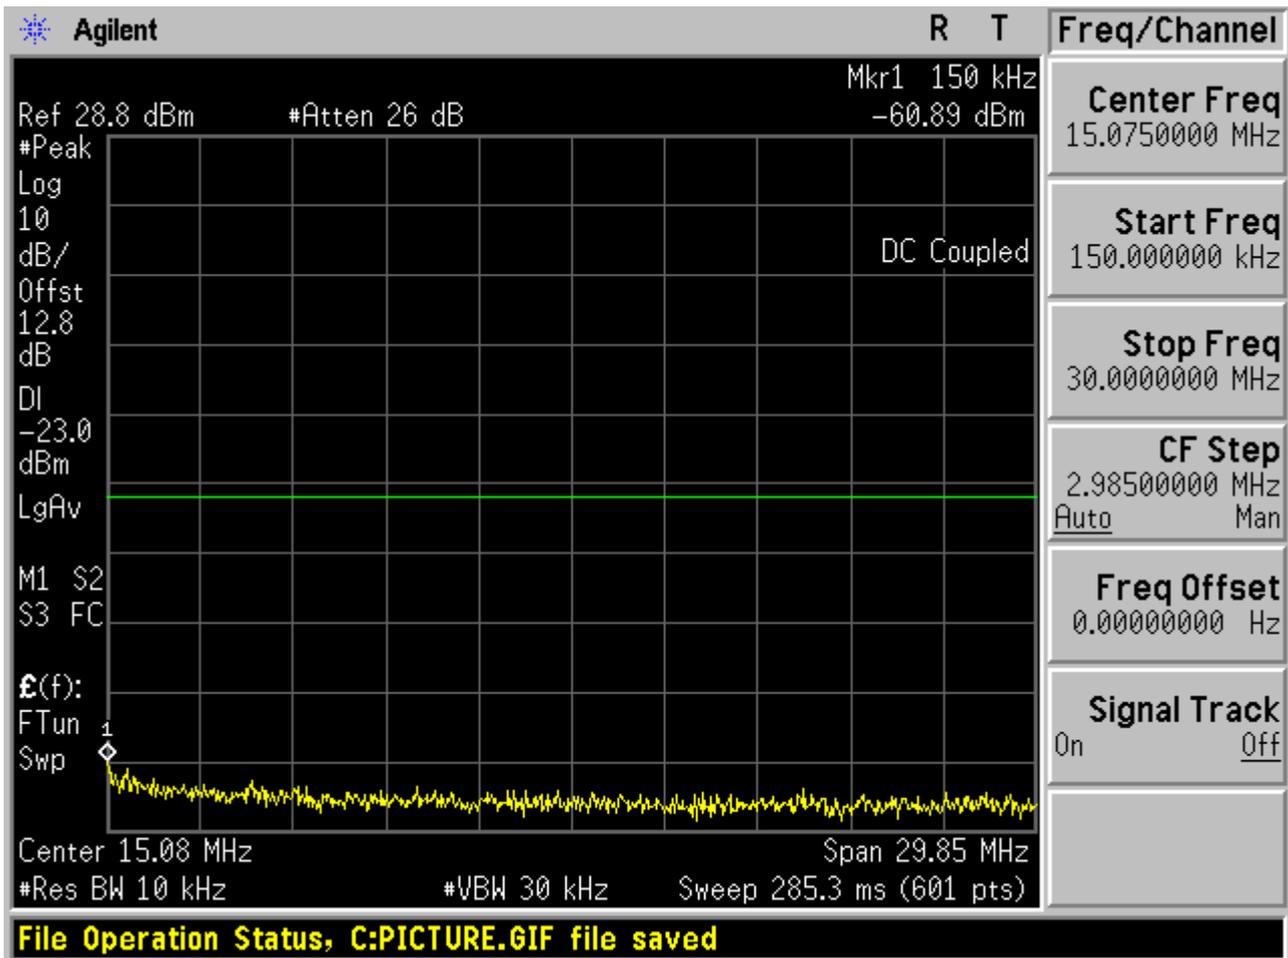


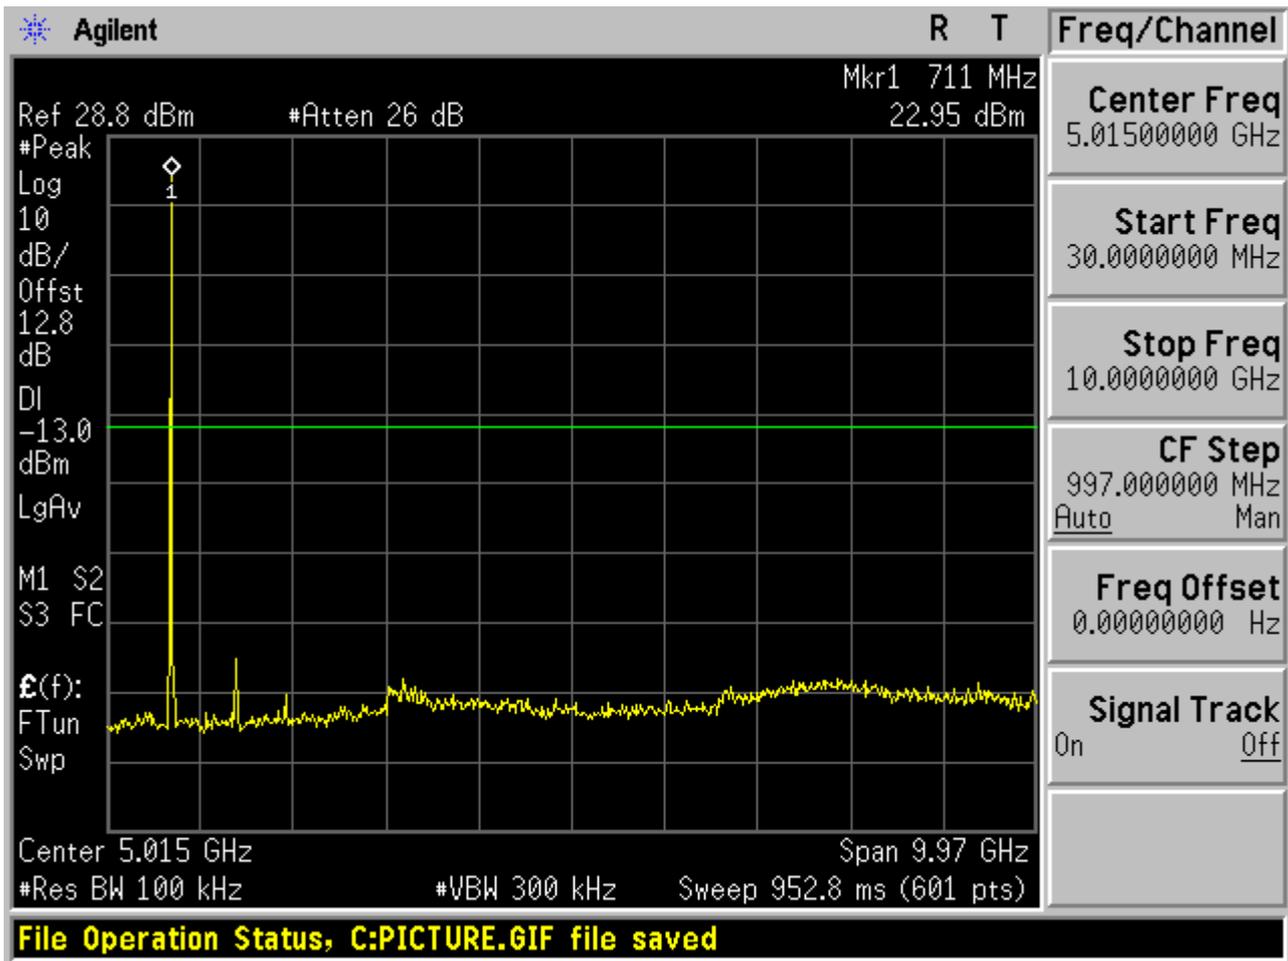




1.2.2.2 Channel = M

1.2.2.2.1 16QAM/1RBs /RB #0

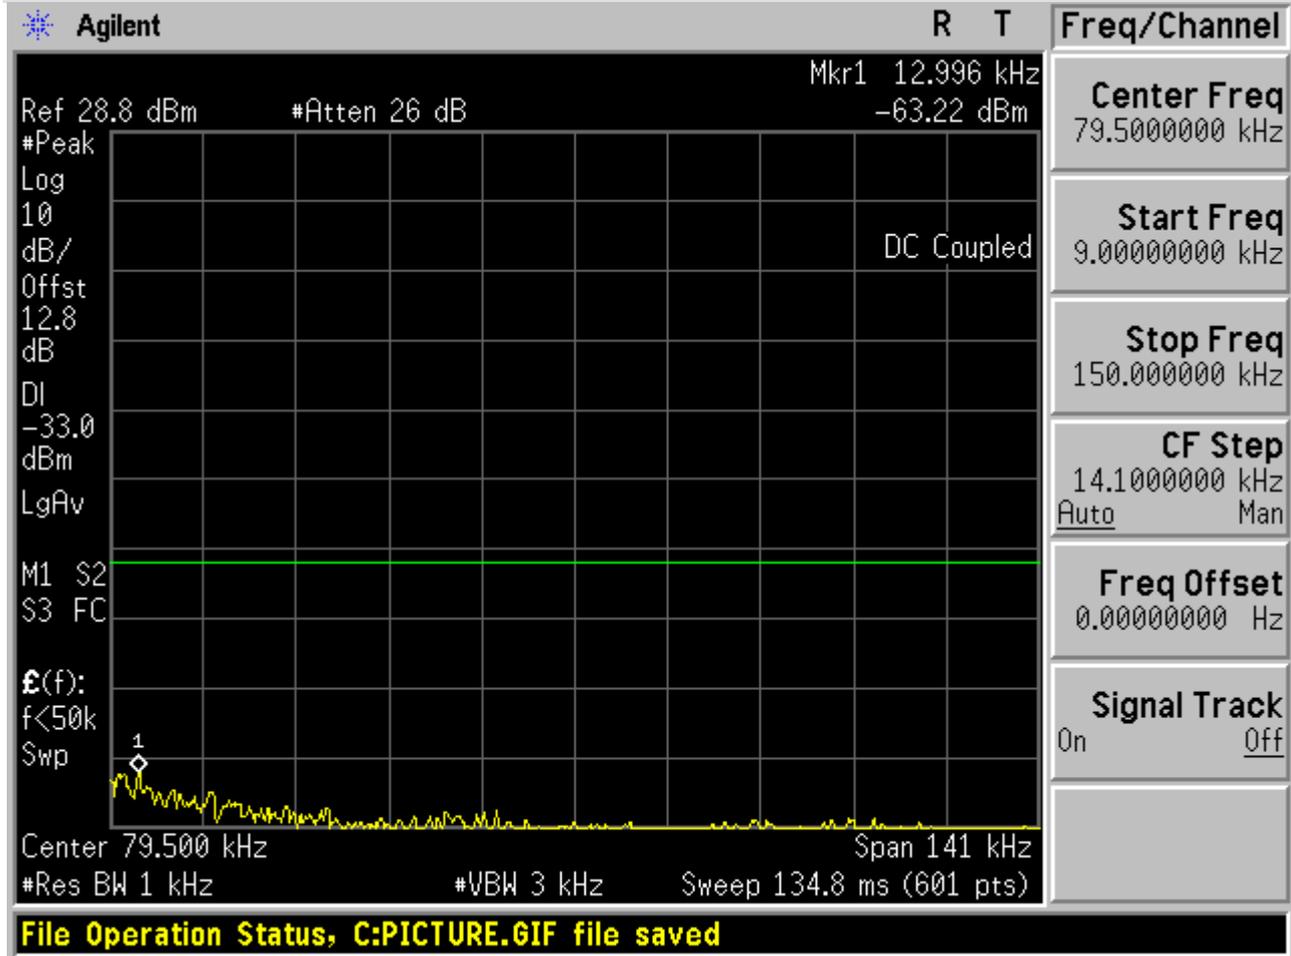


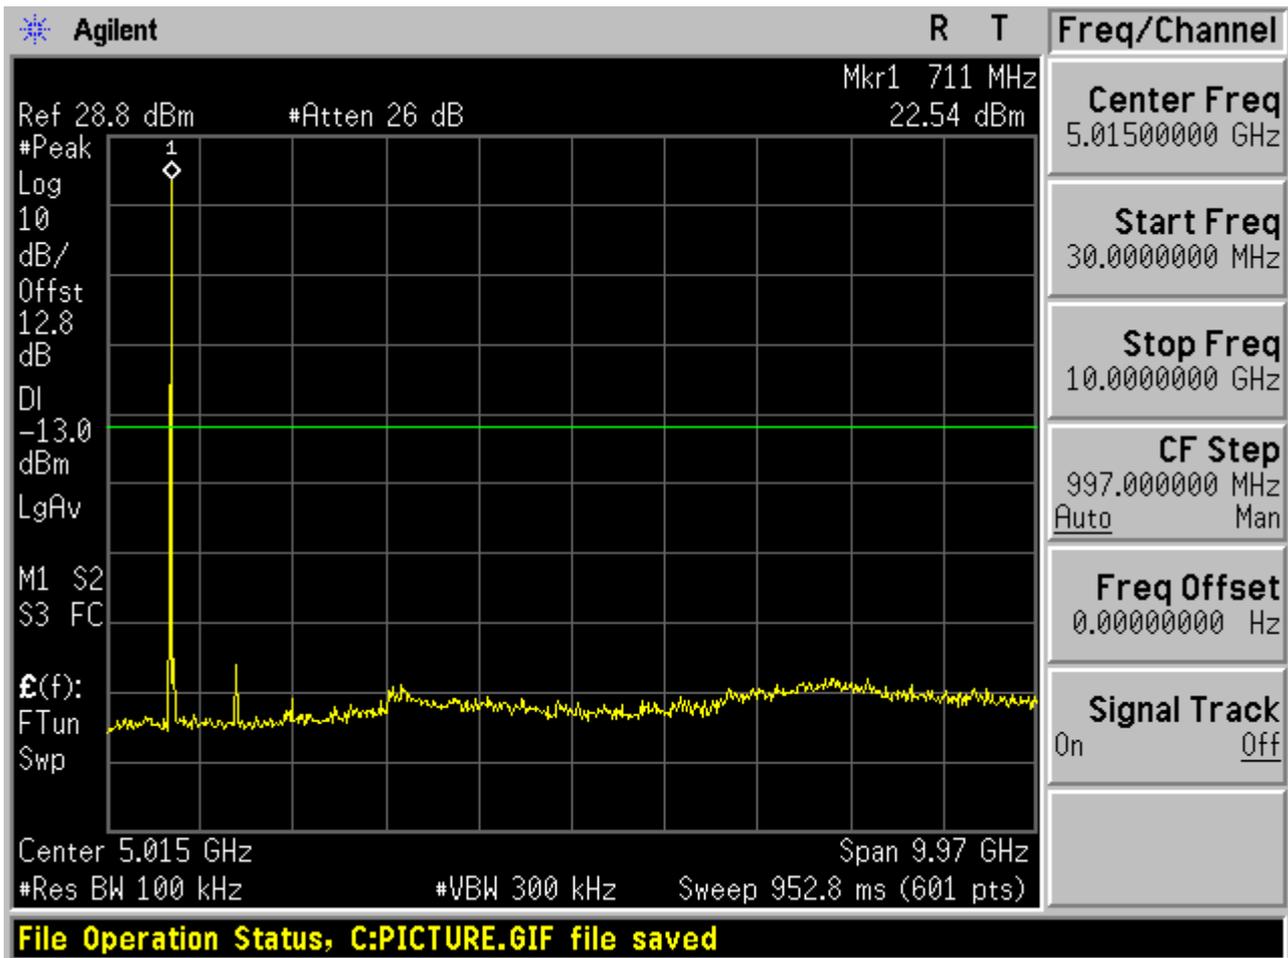





1.2.2.3 Channel = T

1.2.2.3.1 16QAM/1RBs /RB #0

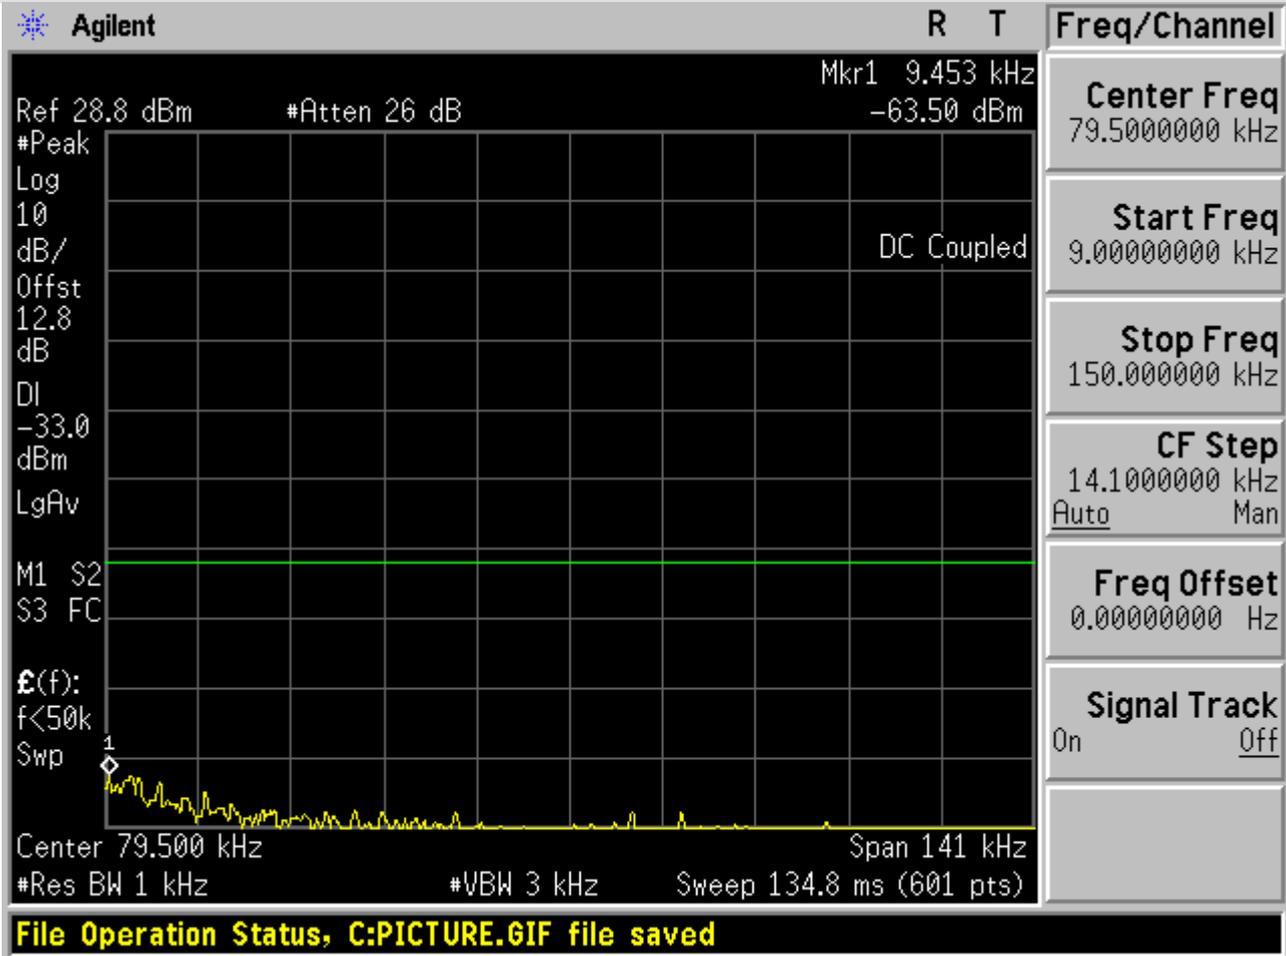

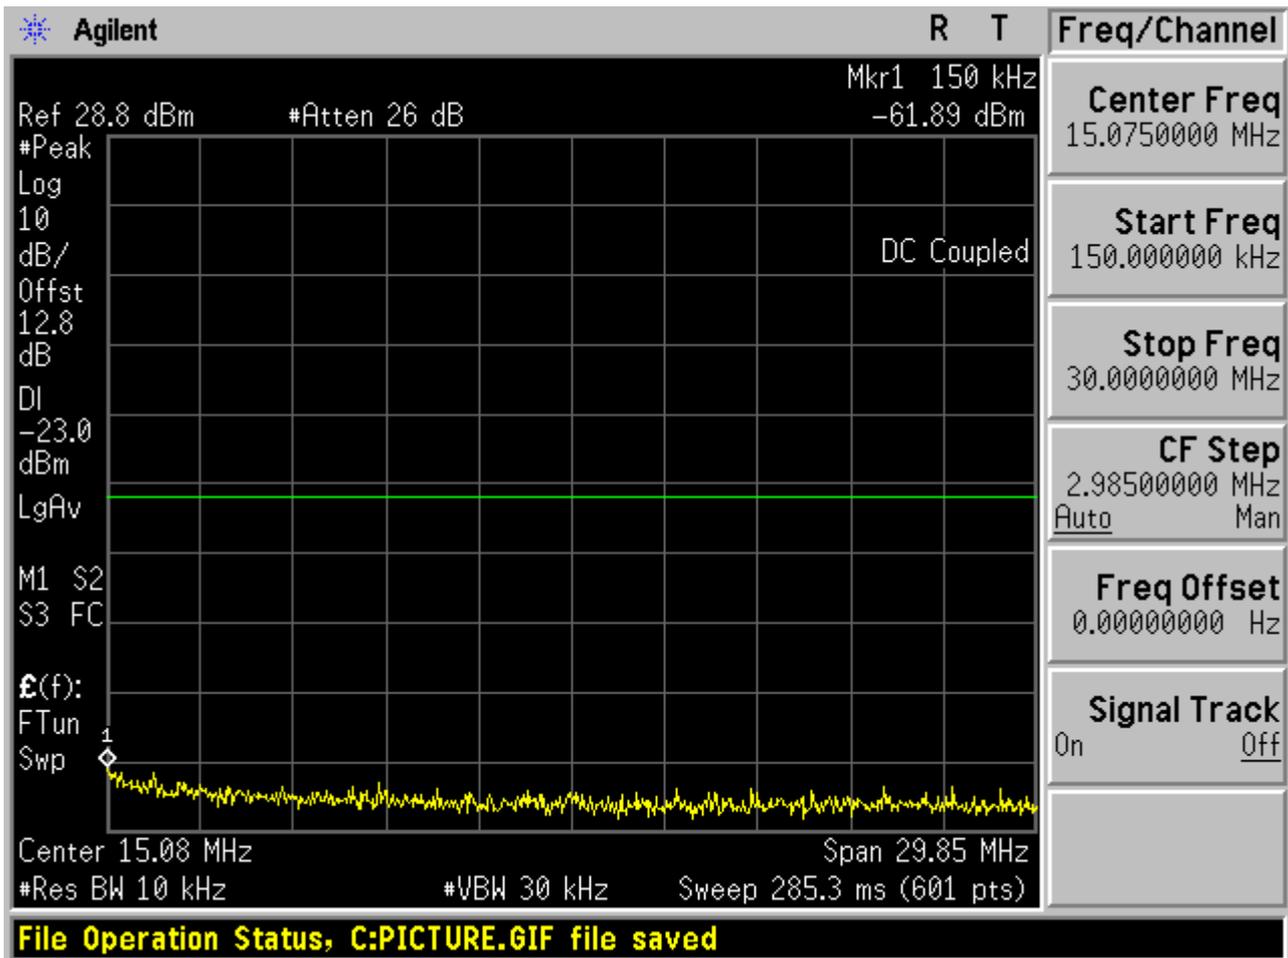

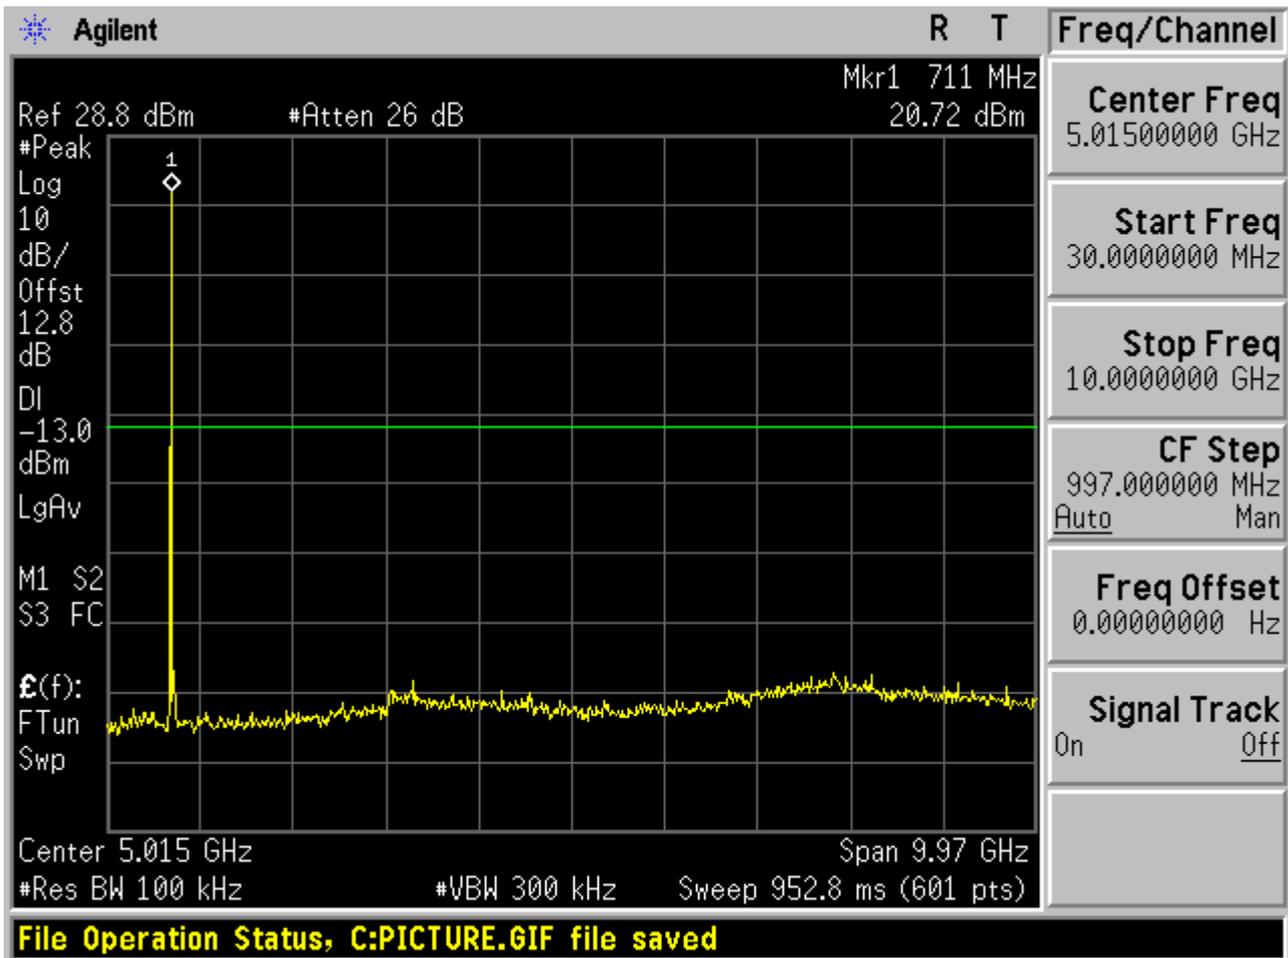

-----END-----

Appendix F


Radiated spurious emission

According to FCC Part 2.1053& Part 27.53(g)


Note: 1. Simultaneous transmission was investigated and no new emissions were found.
2. RBW \geq 1MHz, VBW $>$ 3 x RBW.

LTE Band 17 5M


Traffic Mode (9kHz-30MHz)

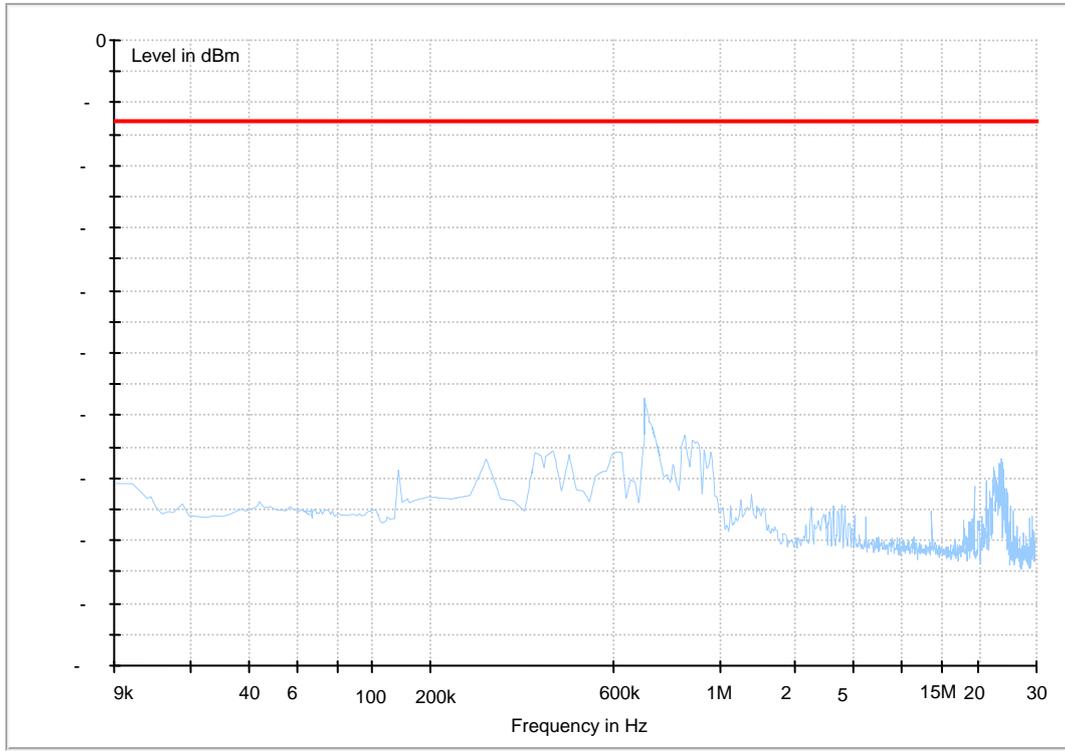

Traffic Mode (30MHz-3GHz)

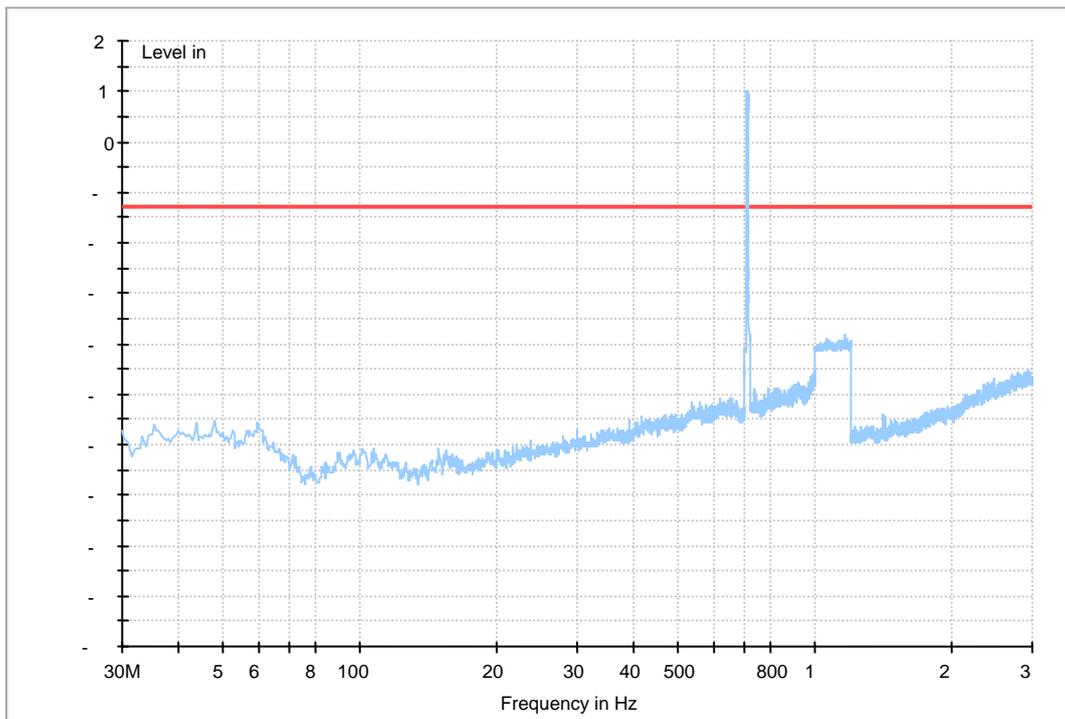


Traffic Mode (3GHz-18GHz)

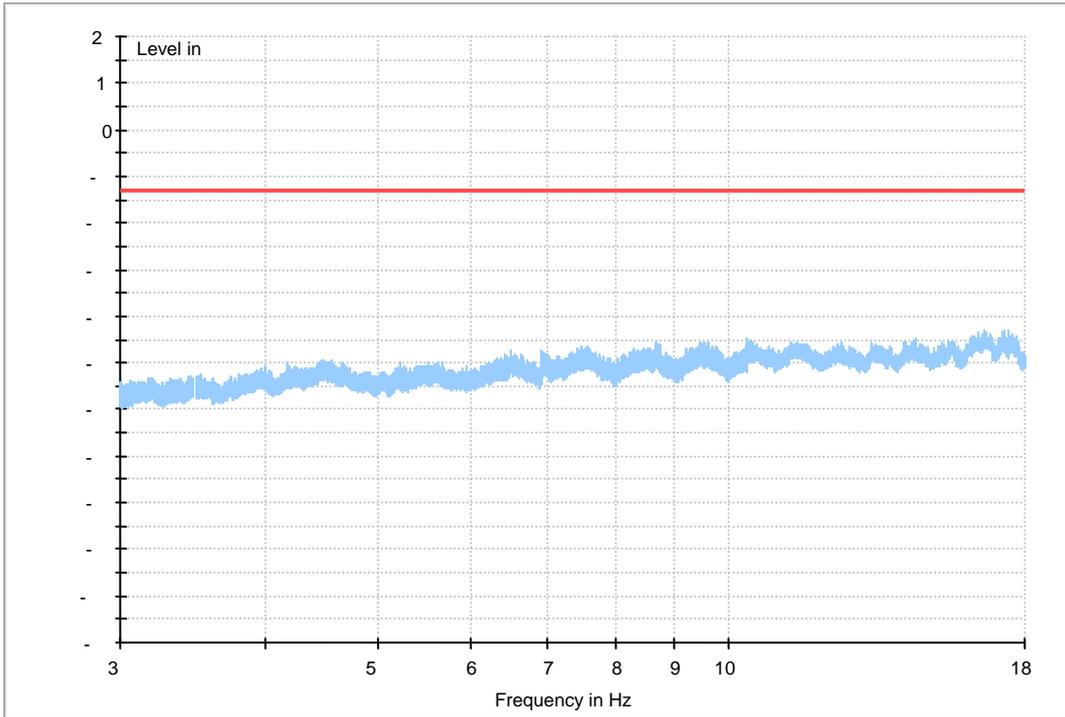


LTE Band 17 10M


Traffic Mode (9kHz-30MHz)

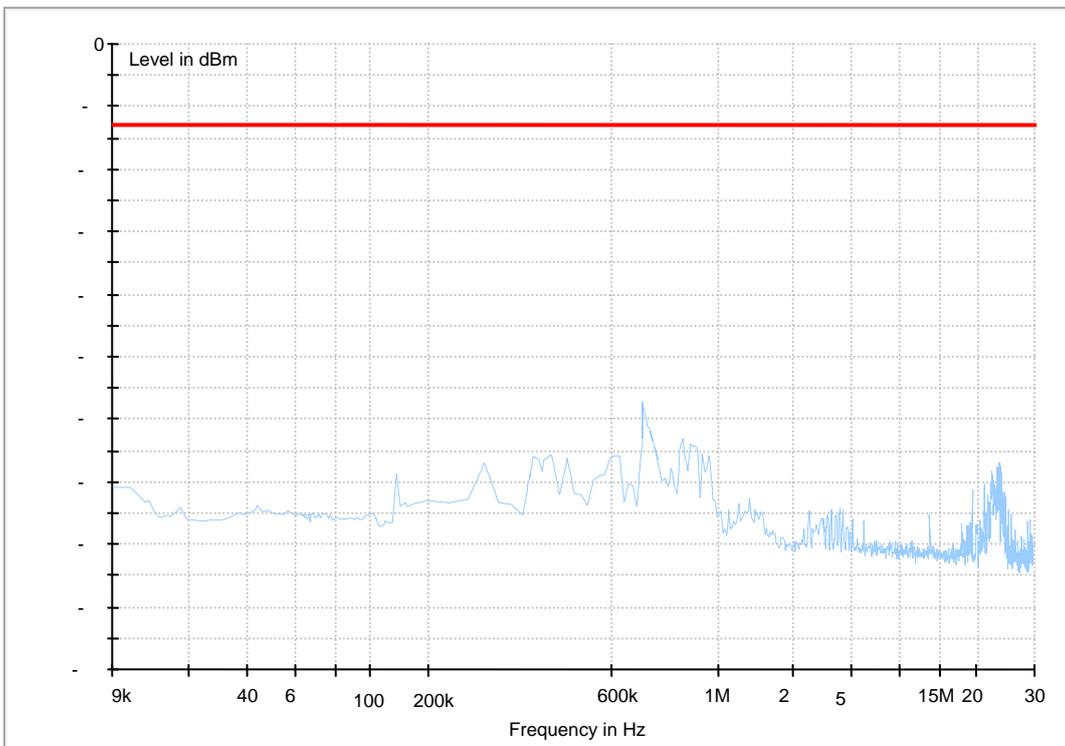

Traffic Mode (30MHz-3GHz)

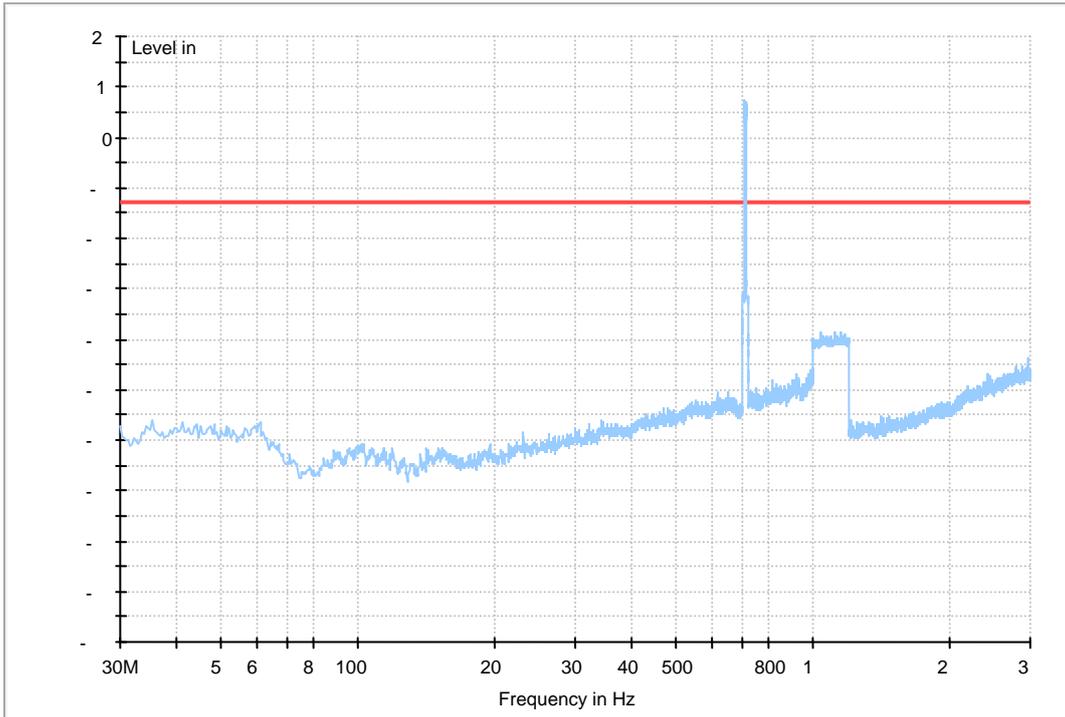

Traffic Mode (3GHz-18GHz)

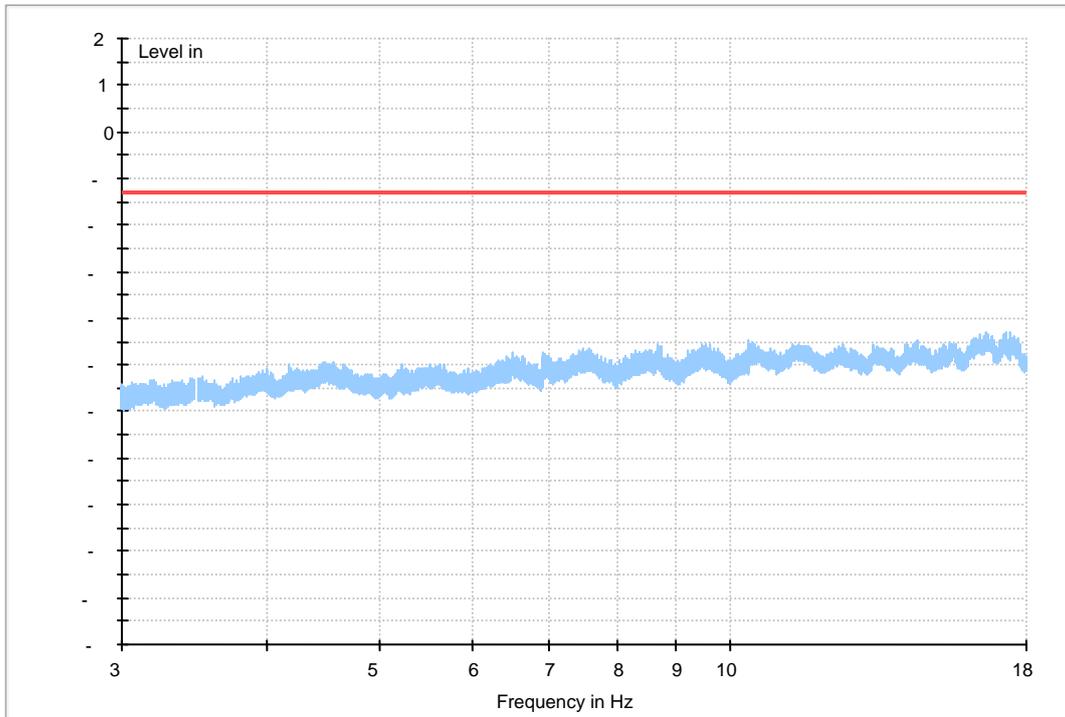

-----The END-----



Appendix G

Frequency Stability

According to FCC Part 2.1051 & FCC Part 27C & 27M



Frequency Error vs. Temperature:

NOTE: All relevant operation modes have been tested, and the worst case data is included in this report.

Table 1 Measurement Results (LTE) BAND 17

Test Mode	RF Ch.	Volt.	Temp.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM1(5M)	M	VN	-30 °C	-11	-0.01549	---	±2.5	Pass
			-20 °C	-7	-0.00986	---	±2.5	Pass
			-10 °C	-24	-0.03380	---	±2.5	Pass
			0 °C	-19	-0.02676	---	±2.5	Pass
			10 °C	26	0.03662	---	±2.5	Pass
			20 °C	-17	-0.02394	---	±2.5	Pass
			30 °C	19	0.02676	---	±2.5	Pass
			40 °C	-14	-0.01972	---	±2.5	Pass
			50 °C	-10	-0.01408	---	±2.5	Pass
TM1(10M)	M	VN	-30 °C	-17	-0.02394	---	±2.5	Pass
			-20 °C	29	0.04085	---	±2.5	Pass
			-10 °C	13	0.01831	---	±2.5	Pass
			0 °C	-24	-0.03380	---	±2.5	Pass
			10 °C	12	0.01690	---	±2.5	Pass
			20 °C	10	0.01408	---	±2.5	Pass
			30 °C	27	0.03803	---	±2.5	Pass
			40 °C	-7	-0.00986	---	±2.5	Pass
			50 °C	-7	-0.00986	---	±2.5	Pass



Frequency Error vs. Voltage:

Table 2 Measurement Results (LTE) BAND 17

Test Mode	RF Ch.	Temp.	Volt.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM1(5M)	M	20 °C	VL	-12	-0.01690	---	±2.5	Pass
			VN	22	0.03099	---	±2.5	Pass
			VH	16	0.02254	---	±2.5	Pass
TM1(10M)	M	20 °C	VL	-22	-0.03099	---	±2.5	Pass
			VN	21	0.02958	---	±2.5	Pass
			VH	21	0.02958	---	±2.5	Pass

-----END-----