

# FCC Radio Test Report

## FCC ID: QISVTR-L09

This report concerns (check one): Original Grant Class I Change Class II Change

**Project No.** : 1611C132A  
**Equipment** : Smart Phone  
**Model Name** : VTR-L09  
**Applicant** : Huawei Technologies Co., Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

**Date of Receipt** : Nov. 21, 2016  
**Date of Test** : Nov. 21, 2016 ~ Dec. 21, 2016  
**Issued Date** : Dec. 22, 2016  
**Tested by** : BTL Inc.

**Testing Engineer** : Shawn Xiao  
(Shawn Xiao)

**Technical Manager** : David Mao  
(David Mao)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

# **B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>1 . CERTIFICATION</b>	<b>5</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
<b>3 . GENERAL INFORMATION</b>	<b>8</b>
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
<b>4 . EMC EMISSION TEST</b>	<b>12</b>
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 EUT TEST CONDITIONS	13
4.1.7 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 RADIATED EMISSION LIMITS	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	15
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 EUT TEST CONDITIONS	17
4.2.7 TEST RESULTS (9K TO 30MHz)	18
4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	18
4.2.9 TEST RESULTS (ABOVE 1000 MHz)	18
<b>5 . MEASUREMENT INSTRUMENTS LIST</b>	<b>19</b>
<b>ATTACHMENT A - CONDUCTED EMISSION</b>	<b>20</b>
<b>ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)</b>	<b>27</b>
<b>ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>	<b>40</b>
<b>ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)</b>	<b>89</b>

### REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1611C132A	Original Issue.	Dec. 22, 2016

## 1. CERTIFICATION

Equipment : Smart Phone  
Brand Name : HUAWEI  
Model Name : VTR-L09  
Applicant : Huawei Technologies Co., Ltd.  
Manufacturer : Huawei Technologies Co., Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C  
Factory : Huawei Technologies Co., Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C  
Date of Test : Nov. 21, 2016 ~ Dec. 21, 2016  
Test Sample : Engineering Sample  
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1611C132A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E(15.407)			
Standard(s) Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	

**NOTE:**

(1) "N/A" denotes test is not applicable in this test report.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{CISPR}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

### A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	1.94

### B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz~30MHz	V	3.79
		9kHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.60
		200MHz ~ 1,000MHz	V	3.86
		200MHz ~ 1,000MHz	H	3.94
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone	
Brand Name	HUAWEI	
Model Name	VTR-L09	
Mode Different	N/A	
Product Description	Operation Frequency	UNII-1: 5150-5250MHz UNII-2A: 5250-5350MHz UNII-2C: 5470-5725MHz UNII-3: 5725-5850MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	433.3Mbps
Power Source	#1 DC Voltage supplied from AC/DC adapter. #2 Battery Supplied.	
Power Rating	#1 Input: 100–240V -5V 0.75A, Output:5V $\overline{\text{---}}$ 2A/4.5A, 4.5V $\overline{\text{---}}$ 5A #2 DC 3.82V 3100mAh	
HW Version	HL1AVTRM	
SW Version	D188-L09C432B083	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- The EUT contains following accessory devices

Item	Mfr/Brand	Model.
Battery	Sunwoda Electronic Co., LTD	HB386280ECW
	SCUD (FUJIAN) Electronics Co., Ltd	HB386280ECW
	Desay Battery Co., Ltd.	HB386280ECW
USB Cable	LUXSHARE-ICT Co., Ltd.	L99UC018-CS-H
	Chang Shu Honglin Technology Co.,Ltd.	130-27309
Earphone	JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD	MEMD1632B580C00
	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD	1311-3291-3.5mm-229
	Goer Tek Inc	NA12
	MERRY ELECTRONICS (SHENZHEN) CO., LTD.	EMC309-001
Adapter	DONGGUAN PHITEK ELECTRONICS CO.,LTD.	HW-050450B00(UK)
	SHENZHEN HUNTKEY ELECTRONIC CO.,LTD.	HW-050450E00(EU)
	Salcomp (Shenzhen)Co.,Ltd	HW-050450U00(US) HW-050450A00(AU)

3. Channel List:

UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

4. Antenna Specification:

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	2

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX A Mode / CH36, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode / CH36, CH48 (UNII-1)
Mode 5	TX AC40 Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH52, CH64 (UNII-2A)
Mode 8	TX N20 Mode / CH52, CH64 (UNII-2A)
Mode 9	TX N40 Mode / CH54, CH62 (UNII-2A)
Mode 10	TX AC20 Mode / CH52, CH64 (UNII-2A)
Mode 11	TX AC40 Mode / CH54, CH62 (UNII-2A)
Mode 12	TX AC80 Mode / CH58 (UNII-2A)
Mode 13	TX A Mode / CH100, CH140 (UNII-2C)
Mode 14	TX N20 Mode / CH100, CH140 (UNII-2C)
Mode 15	TX N40 Mode / CH102, CH134 (UNII-2C)
Mode 16	TX AC20 Mode / CH100, CH140 (UNII-2C)
Mode 17	TX AC40 Mode / CH102, CH134 (UNII-2C)
Mode 18	TX AC80 Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149,CH165 (UNII-3)
Mode 20	TX N20 Mode / CH149, CH165 (UNII-3)
Mode 21	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 22	TX AC20 Mode / CH149, CH165 (UNII-3)
Mode 23	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC80 Mode / CH155 (UNII-3)
Mode 25	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 25	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode / CH36, CH48 (UNII-1)
Mode 5	TX AC40 Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH52, CH64 (UNII-2A)
Mode 8	TX N20 Mode / CH52, CH64 (UNII-2A)
Mode 9	TX N40 Mode / CH54, CH62 (UNII-2A)
Mode 10	TX AC20 Mode / CH52, CH64 (UNII-2A)
Mode 11	TX AC40 Mode / CH54, CH62 (UNII-2A)
Mode 12	TX AC80 Mode / CH58 (UNII-2A)
Mode 13	TX A Mode / CH100, CH140 (UNII-2C)
Mode 14	TX N20 Mode / CH100, CH140 (UNII-2C)
Mode 15	TX N40 Mode / CH102, CH134 (UNII-2C)
Mode 16	TX AC20 Mode / CH100, CH140 (UNII-2C)
Mode 17	TX AC40 Mode / CH102, CH134 (UNII-2C)
Mode 18	TX AC80 Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149,CH165 (UNII-3)
Mode 20	TX N20 Mode / CH149, CH165 (UNII-3)
Mode 21	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 22	TX AC20 Mode / CH149, CH165 (UNII-3)
Mode 23	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC80 Mode / CH155 (UNII-3)

**Note:**

- (1) For radiated below 1GHz test, the 802.11a mode is found to be the worst case and recorded.
- (2) The EUT was pre-tested on positioned of each 3 axis.The worst case was found positioned on X-plane.Therefore only the test data of this X-plane was used for radiated emission measurement test.

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

FREQUENCY(MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

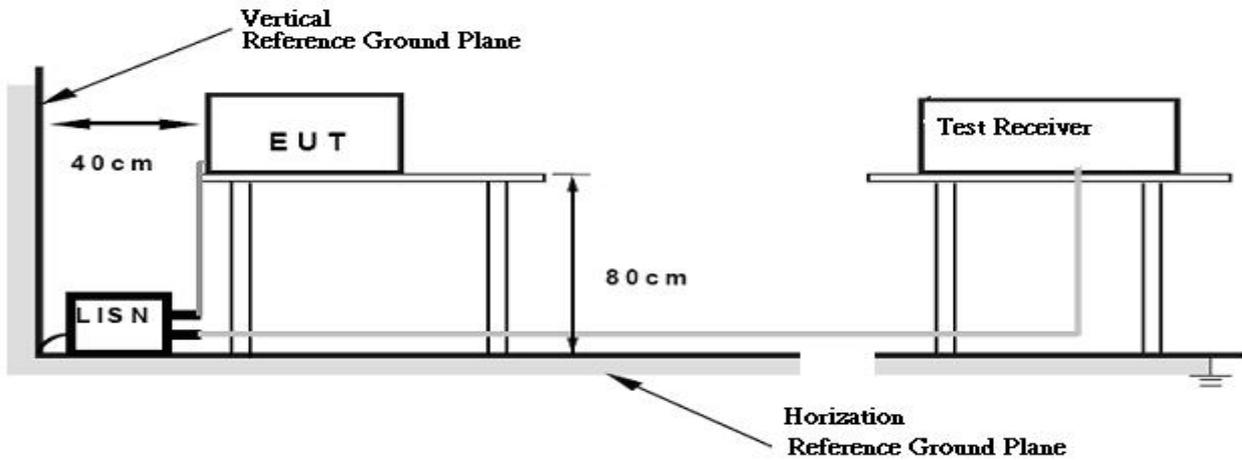

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.

#### 4.1.6 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 53%    Test Voltage: AC 120V/60Hz

#### 4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150kHz to 30MHz.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequencies (MHz)	EIRP Limit (dBm)	Band edge at 3m (dBμV/m)	Harmonic at 1.5m (dBμV/m)
5150-5250	-27	68.3	74.3 (Note 3)
5250-5350	-27	68.3	74.3 (Note 3)
5470-5725	-27	68.3	74.3 (Note 3)
5725-5850	-27(Note 2)	68.3	74.3 (Note 3)
	10(Note 2)	105.3	111.3(Note 3)
	15.6(Note 2)	110.9	116.9(Note 3)
	27(Note 2)	122.3	128.3(Note 3)

Note:

- The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

- 20log d limit/d measure=20log 3/1.5=6dB.

**4.2.2 TEST PROCEDURE**


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**4.2.3 DEVIATION FROM TEST STANDARD**

No deviation


**4.2.4 TEST SETUP**

(A)Radiated Emission Test Set-Up Frequency Below 1GHz

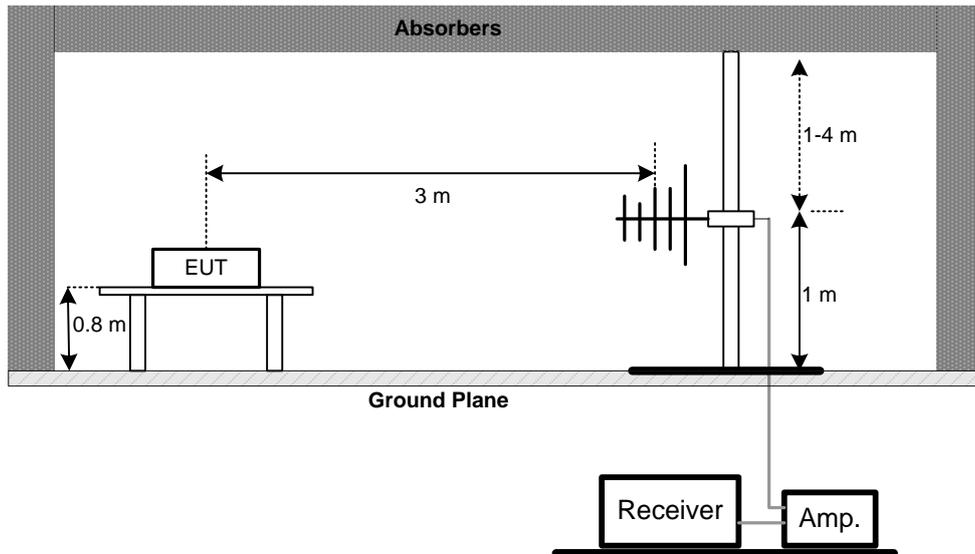


**(B) Radiated Emission Test Set-Up Frequency Above 1 GHz**


**Band edge**

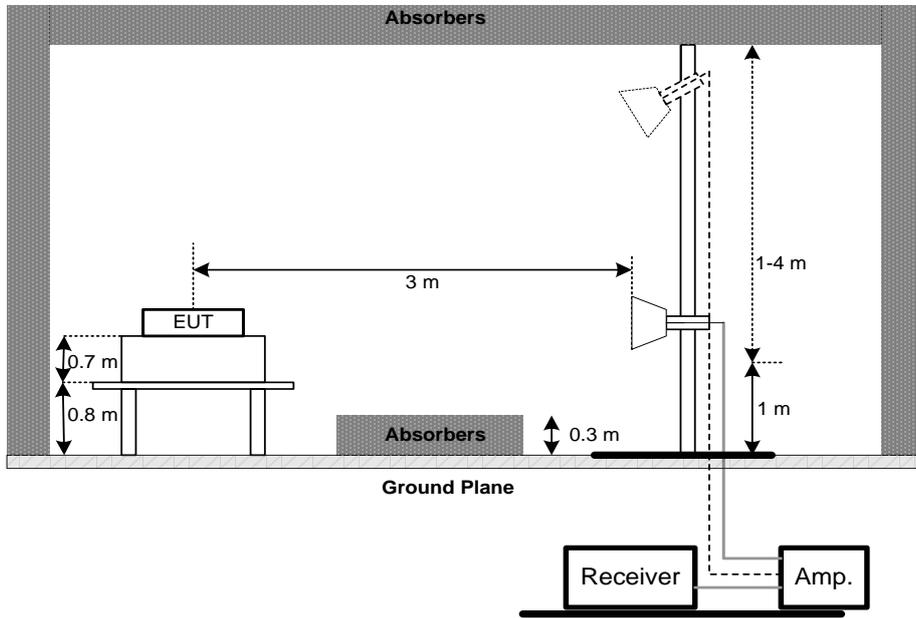

**Harmonic**

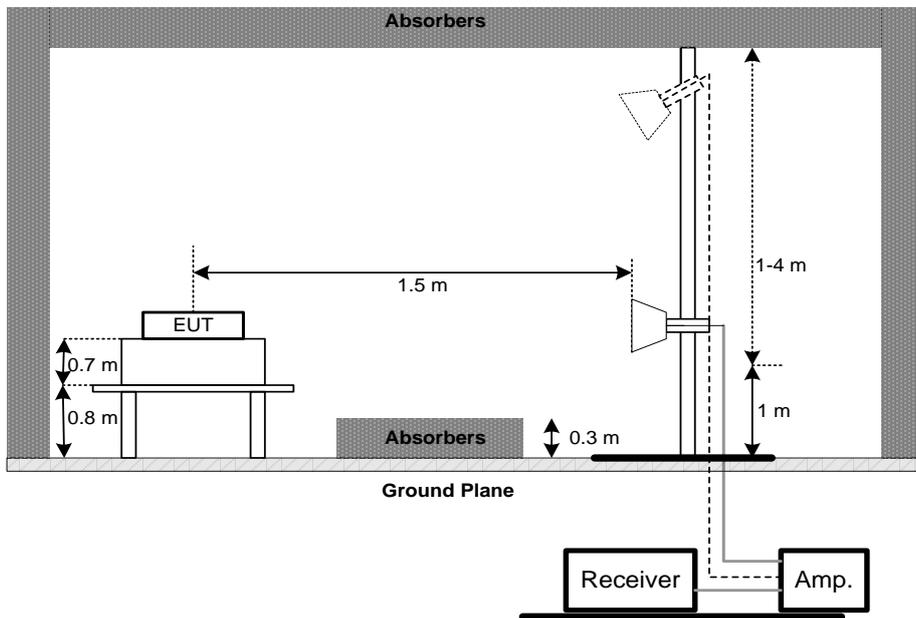

(C) Radiated emissions below 30MHz

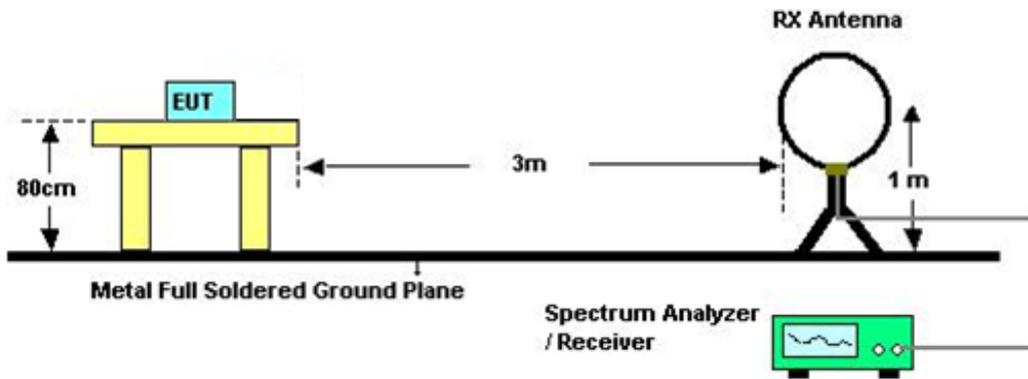

**4.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

**4.2.6 EUT TEST CONDITIONS**

Temperature: 25°C    Relative Humidity: 60%    Test Voltage: AC 120V/60Hz

#### **4.2.7 TEST RESULTS (9K TO 30MHz)**

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### **4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)**

Please refer to the Attachment C.

#### **4.2.9 TEST RESULTS (ABOVE 1000 MHz)**

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30 MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A


Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Nov. 08, 2017
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 10, 2017
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 26, 2017
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Antenna	ETS	3115	00075789	Mar. 27, 2017
8	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2017
9	Receiver	AGILENT	N9038A	MY52130039	Oct. 10, 2017
10	Test Cable	emci	EMC104-SM-S M-10000(1GHz-26.5GHz)	C-68	Jun. 26, 2017
11	Controller	CT	SC100	N/A	N/A
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 23, 2017
13	Microwave Pre-amplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 27, 2017
14	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 06, 2017
15	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
 All calibration period of equipment list is one year.

## ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX Mode (Adapter:PHITEK)

**Line**

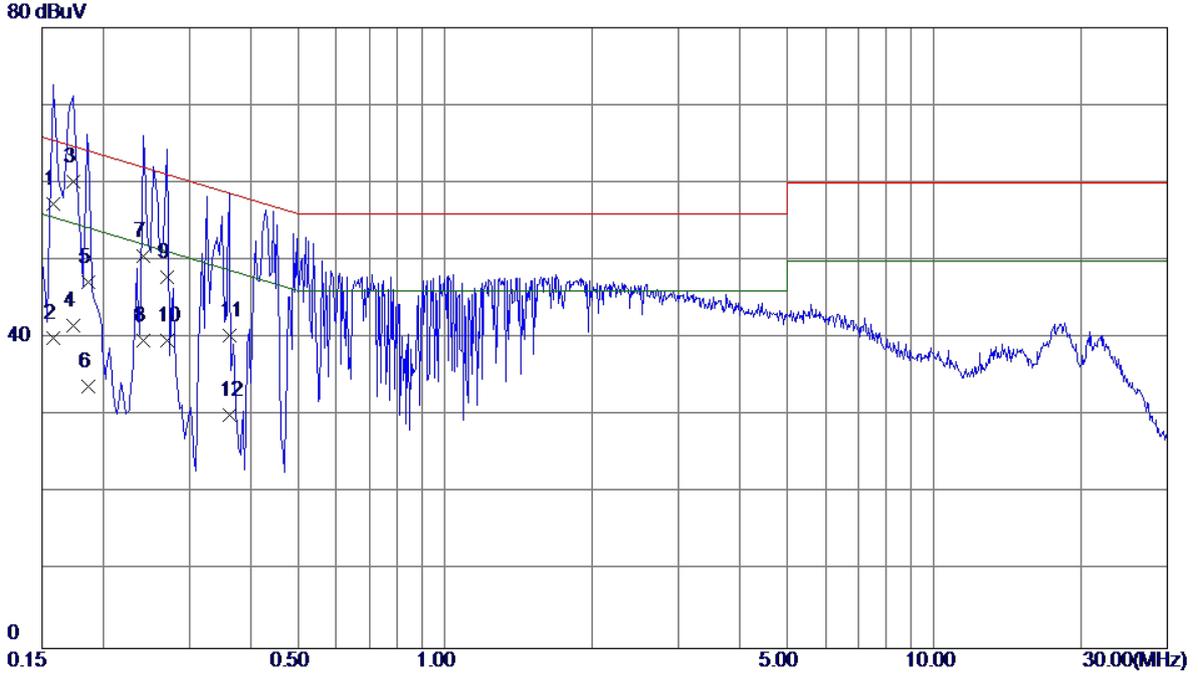


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1580	47.80	9.52	57.32	65.57	-8.25	QP	
2	0.1580	30.50	9.52	40.02	55.57	-15.55	AVG	
3 *	0.1740	50.60	9.52	60.12	64.77	-4.65	QP	
4	0.1740	32.10	9.52	41.62	54.77	-13.15	AVG	
5	0.1860	37.60	9.53	47.13	64.21	-17.08	QP	
6	0.1860	24.30	9.53	33.83	54.21	-20.38	AVG	
7	0.2420	41.00	9.53	50.53	62.03	-11.50	QP	
8	0.2420	30.10	9.53	39.63	52.03	-12.40	AVG	
9	0.2700	38.30	9.53	47.83	61.12	-13.29	QP	
10	0.2700	30.20	9.53	39.73	51.12	-11.39	AVG	
11	0.3620	30.80	9.54	40.34	58.68	-18.34	QP	
12	0.3620	20.50	9.54	30.04	48.68	-18.64	AVG	

Note : The test result has included the cable loss.

Test Mode: TX Mode (Adapter:PHITEK)

### Neutral

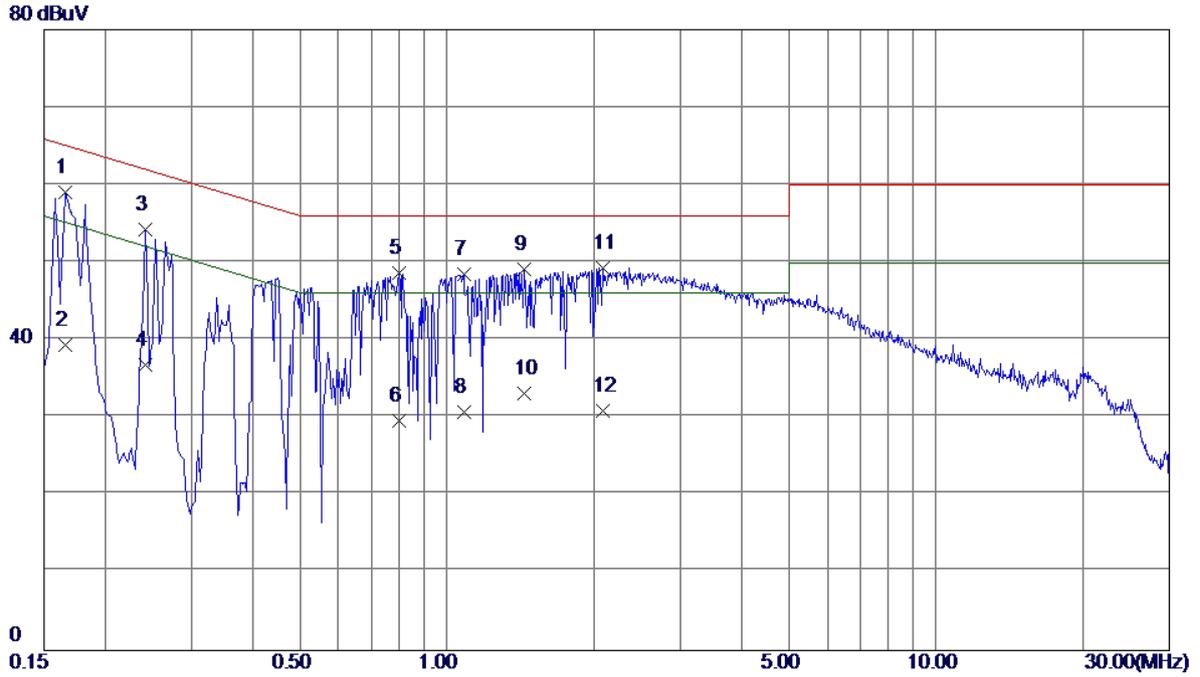


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1660	49.63	9.44	59.07	65.16	-6.09	Peak	
2	0.1660	29.90	9.44	39.34	55.16	-15.82	AVG	
3	0.2420	44.78	9.53	54.31	62.03	-7.72	Peak	
4	0.2420	27.30	9.53	36.83	52.03	-15.20	AVG	
5	0.7980	39.04	9.55	48.59	56.00	-7.41	Peak	
6	0.7980	20.10	9.55	29.65	46.00	-16.35	AVG	
7	1.0820	38.88	9.66	48.54	56.00	-7.46	Peak	
8	1.0820	20.99	9.66	30.65	46.00	-15.35	AVG	
9	1.4380	39.46	9.67	49.13	56.00	-6.87	Peak	
10	1.4380	23.40	9.67	33.07	46.00	-12.93	AVG	
11	2.0820	39.57	9.71	49.28	56.00	-6.72	Peak	
12	2.0820	21.20	9.71	30.91	46.00	-15.09	AVG	

Note : The test result has included the cable loss.

Test Mode: TX Mode (Adapter:HUNTKEY)

**Line**

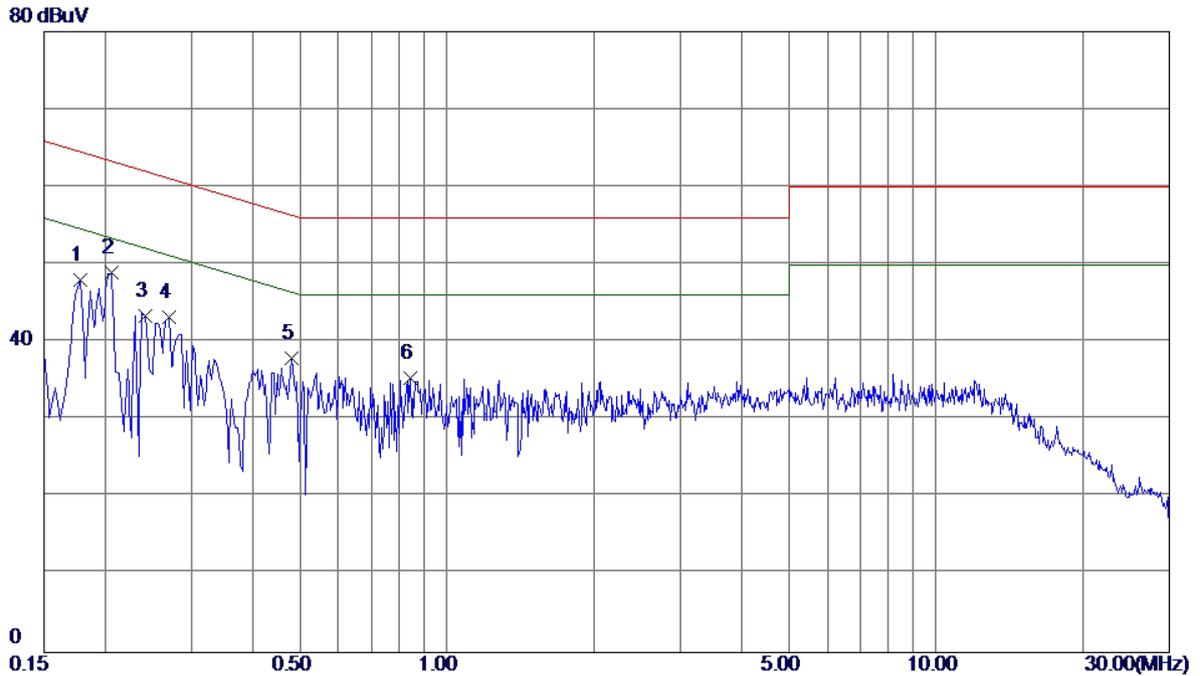


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1780	38.51	9.53	48.04	64.58	-16.54	Peak	
2 *	0.2060	39.47	9.53	49.00	63.37	-14.37	Peak	
3	0.2420	33.84	9.53	43.37	62.03	-18.66	Peak	
4	0.2700	33.71	9.53	43.24	61.12	-17.88	Peak	
5	0.4820	28.35	9.62	37.97	56.30	-18.33	Peak	
6	0.8420	25.61	9.75	35.36	56.00	-20.64	Peak	

Note : The test result has included the cable loss.

Test Mode: TX Mode (Adapter:HUNTKEY)

**Neutral**

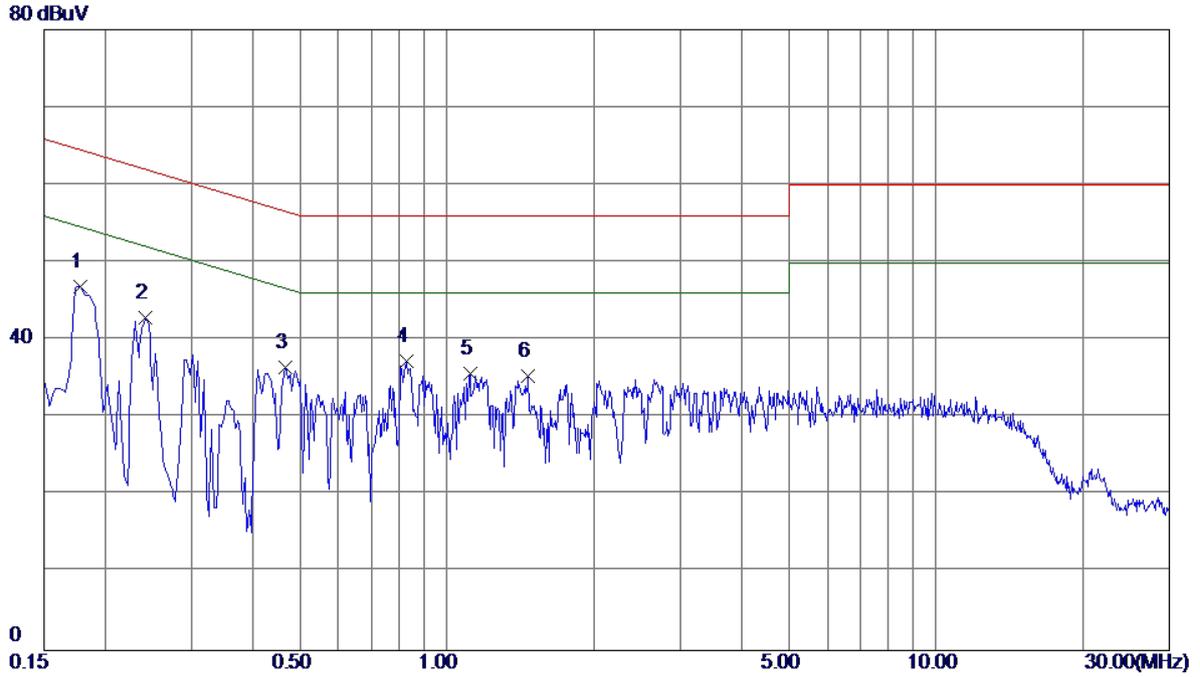


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1780	37.43	9.45	46.88	64.58	-17.70	Peak	
2	0.2420	33.34	9.53	42.87	62.03	-19.16	Peak	
3	0.4660	27.02	9.44	36.46	56.58	-20.12	Peak	
4	0.8260	27.67	9.58	37.25	56.00	-18.75	Peak	
5	1.1140	25.98	9.66	35.64	56.00	-20.36	Peak	
6	1.4660	25.67	9.67	35.34	56.00	-20.66	Peak	

Note : The test result has included the cable loss.

Test Mode: TX Mode (Adapter:Salcomp)

**Line**

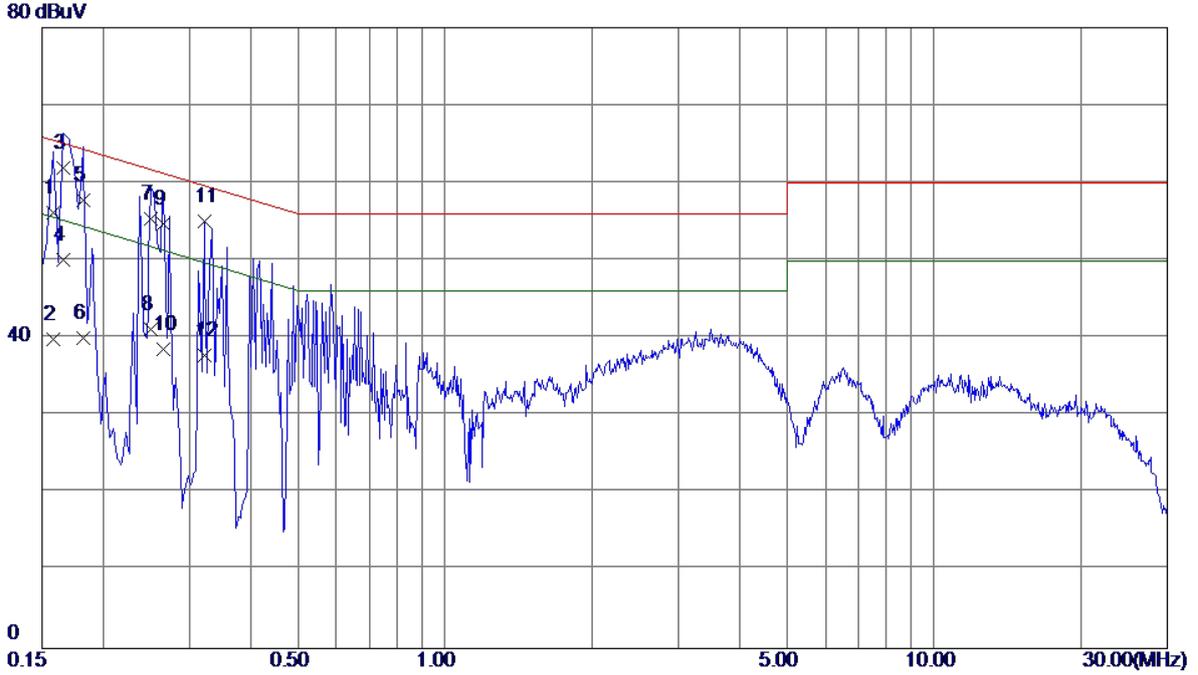


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1580	46.60	9.52	56.12	65.57	-9.45	QP	
2	0.1580	30.40	9.52	39.92	55.57	-15.65	AVG	
3 *	0.1660	52.40	9.52	61.92	65.16	-3.24	QP	
4	0.1660	40.60	9.52	50.12	55.16	-5.04	AVG	
5	0.1819	48.30	9.53	57.83	64.40	-6.57	QP	
6	0.1819	30.50	9.53	40.03	54.40	-14.37	AVG	
7	0.2500	45.90	9.53	55.43	61.76	-6.33	QP	
8	0.2500	31.60	9.53	41.13	51.76	-10.63	AVG	
9	0.2660	45.20	9.53	54.73	61.24	-6.51	QP	
10	0.2660	29.10	9.53	38.63	51.24	-12.61	AVG	
11	0.3220	45.49	9.53	55.02	59.66	-4.64	Peak	
12	0.3220	28.30	9.53	37.83	49.66	-11.83	AVG	

Note : The test result has included the cable loss.

Test Mode: TX Mode (Adapter:Salcomp)

**Neutral**

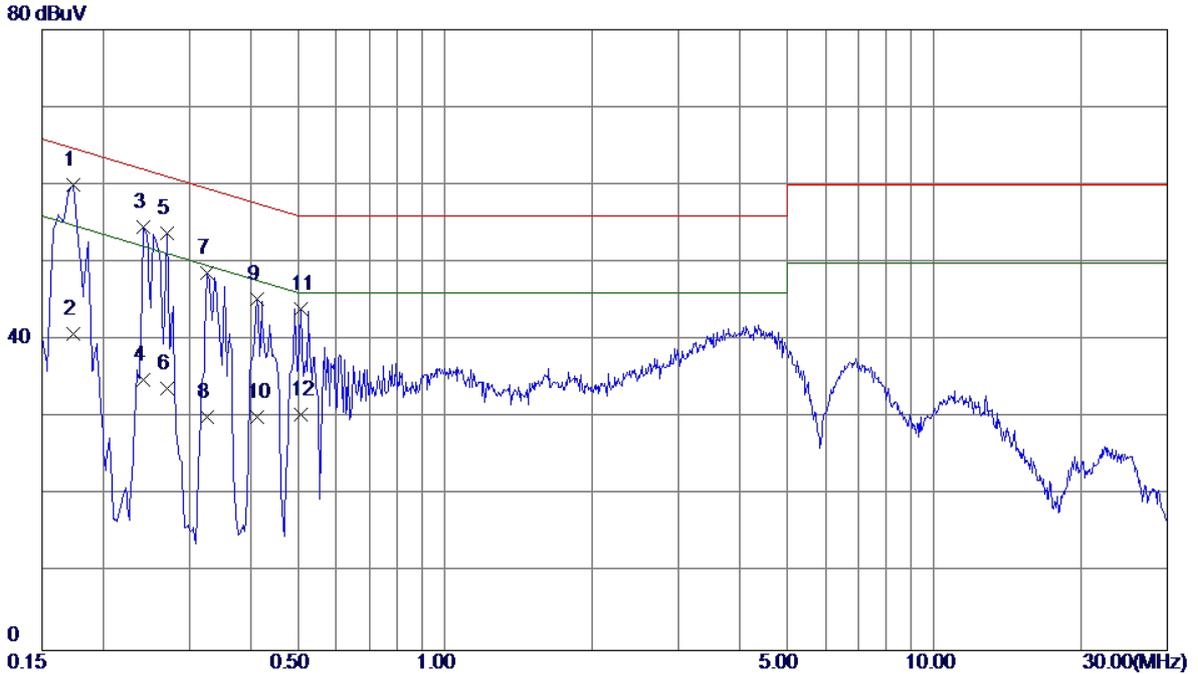


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1740	50.55	9.44	59.99	64.77	-4.78	Peak	
2	0.1740	31.29	9.44	40.73	54.77	-14.04	AVG	
3	0.2420	44.98	9.53	54.51	62.03	-7.52	Peak	
4	0.2420	25.30	9.53	34.83	52.03	-17.20	AVG	
5	0.2700	44.29	9.53	53.82	61.12	-7.30	Peak	
6	0.2700	24.30	9.53	33.83	51.12	-17.29	AVG	
7	0.3260	39.16	9.53	48.69	59.55	-10.86	Peak	
8	0.3260	20.60	9.53	30.13	49.55	-19.42	AVG	
9	0.4140	35.83	9.44	45.27	57.57	-12.30	Peak	
10	0.4140	20.60	9.44	30.04	47.57	-17.53	AVG	
11	0.5060	34.61	9.44	44.05	56.00	-11.95	Peak	
12	0.5060	21.00	9.44	30.44	46.00	-15.56	AVG	

Note : The test result has included the cable loss.

**ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)**

Test Mode: TX Mode (Adapter:PHITEK)


Ant 0°

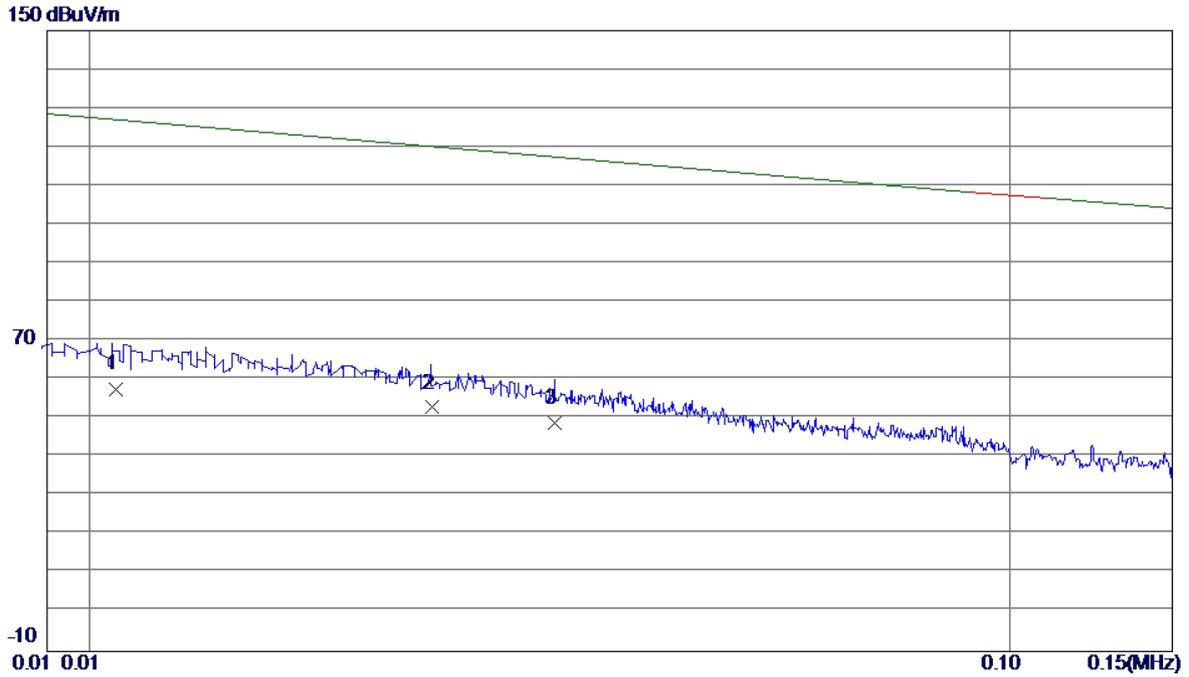

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.0107	33.60	24.08	57.68	128.08	-70.40	AVG	
2	0.0236	29.80	23.08	52.88	124.89	-72.01	AVG	
3	0.0320	26.80	22.04	48.84	122.82	-73.98	AVG	

Test Mode: TX Mode (Adapter:PHITEK)


Ant 0°

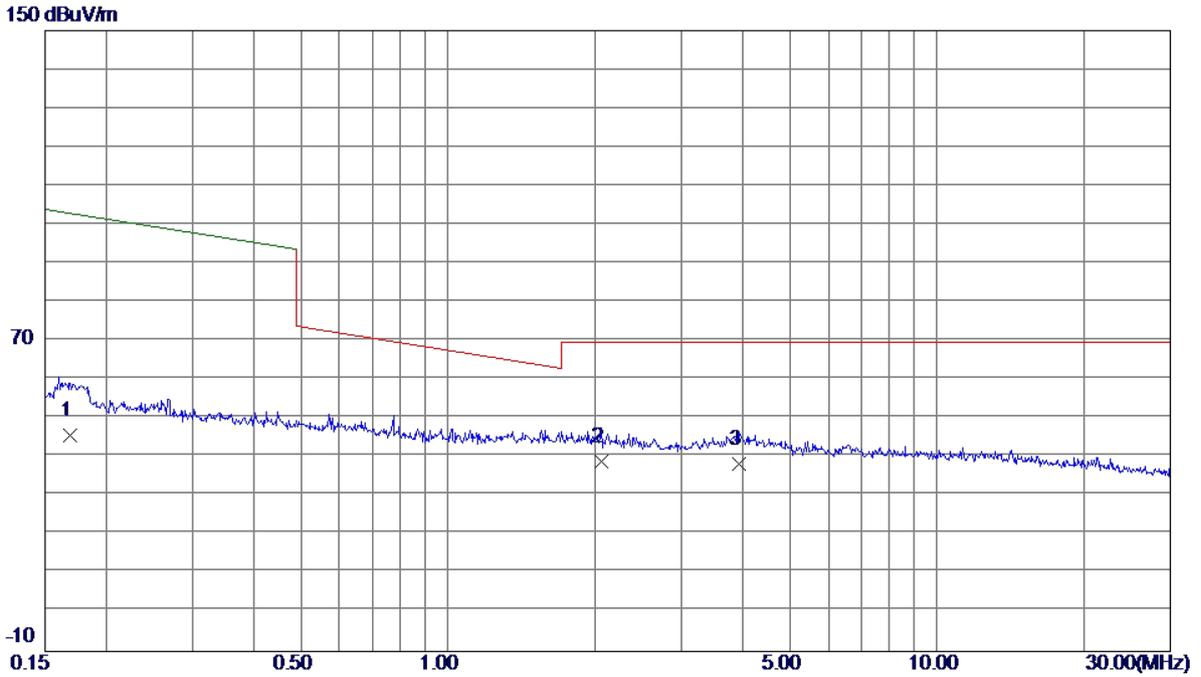

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.1685	27.10	18.72	45.82	104.78	-58.96	AVG	
2 *	2.0550	21.21	17.83	39.04	69.54	-30.50	QP	
3	3.9430	19.70	18.63	38.33	69.54	-31.21	QP	

Test Mode: TX Mode (Adapter:PHITEK)


Ant 90°

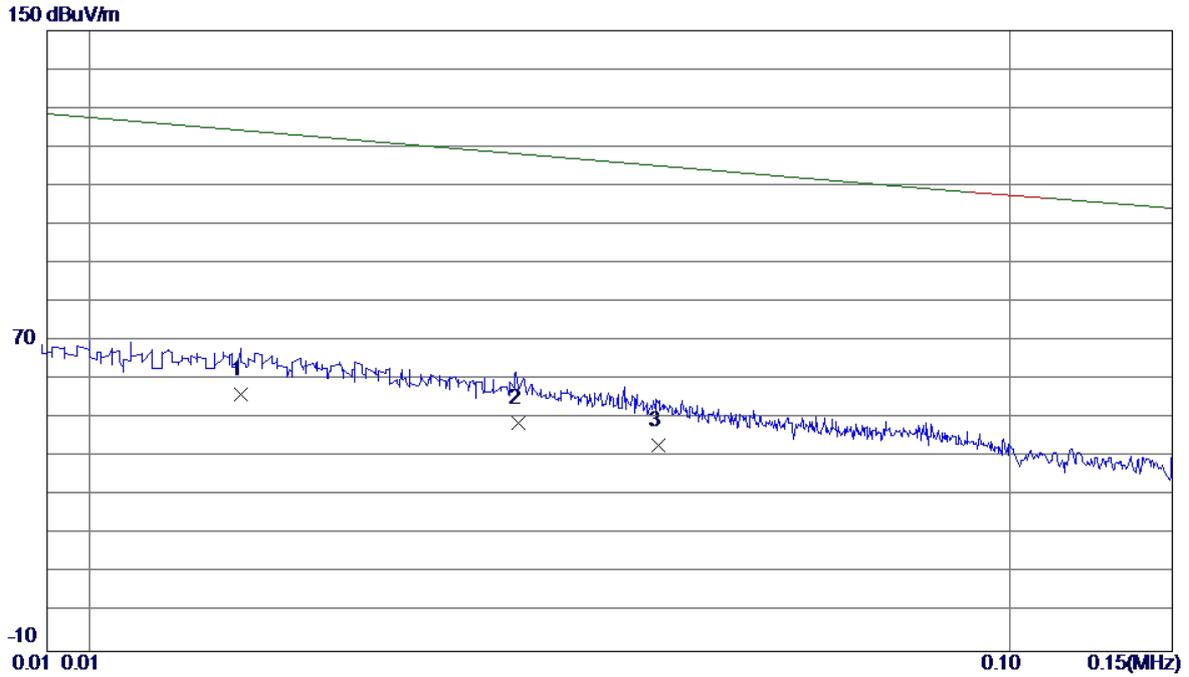

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.0146	32.30	23.84	56.14	127.11	-70.97	AVG	
2	0.0292	26.50	22.39	48.89	123.51	-74.62	AVG	
3	0.0415	22.30	20.87	43.17	120.47	-77.30	AVG	

Test Mode: TX Mode (Adapter:PHITEK)


Ant 90°

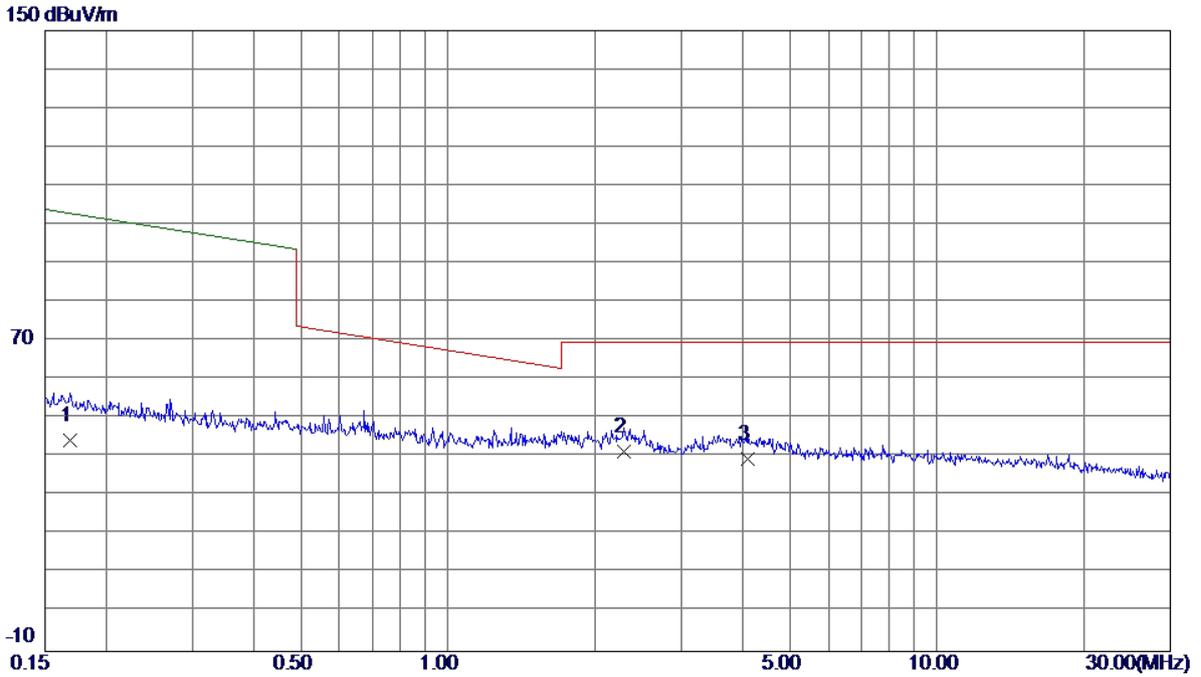

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.1685	25.80	18.72	44.52	104.78	-60.26	AVG	
2 *	2.2847	23.90	17.54	41.44	69.54	-28.10	QP	
3	4.1137	21.10	18.52	39.62	69.54	-29.92	QP	

Test Mode: TX Mode (Adapter:HUNTKEY)


Ant 0°

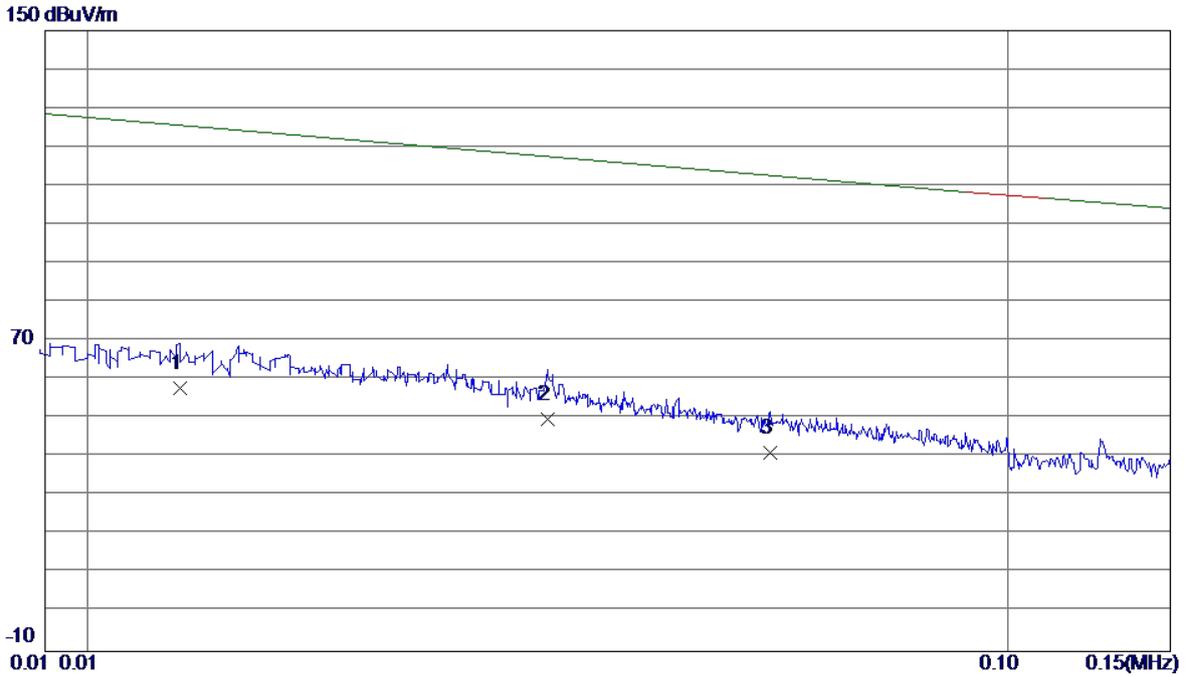

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.0126	33.80	23.96	57.76	127.61	-69.85	AVG	
2	0.0316	27.60	22.09	49.69	122.92	-73.23	AVG	
3	0.0551	21.41	19.76	41.17	117.11	-75.94	AVG	

Test Mode: TX Mode (Adapter:HUNTKEY)


Ant 0°

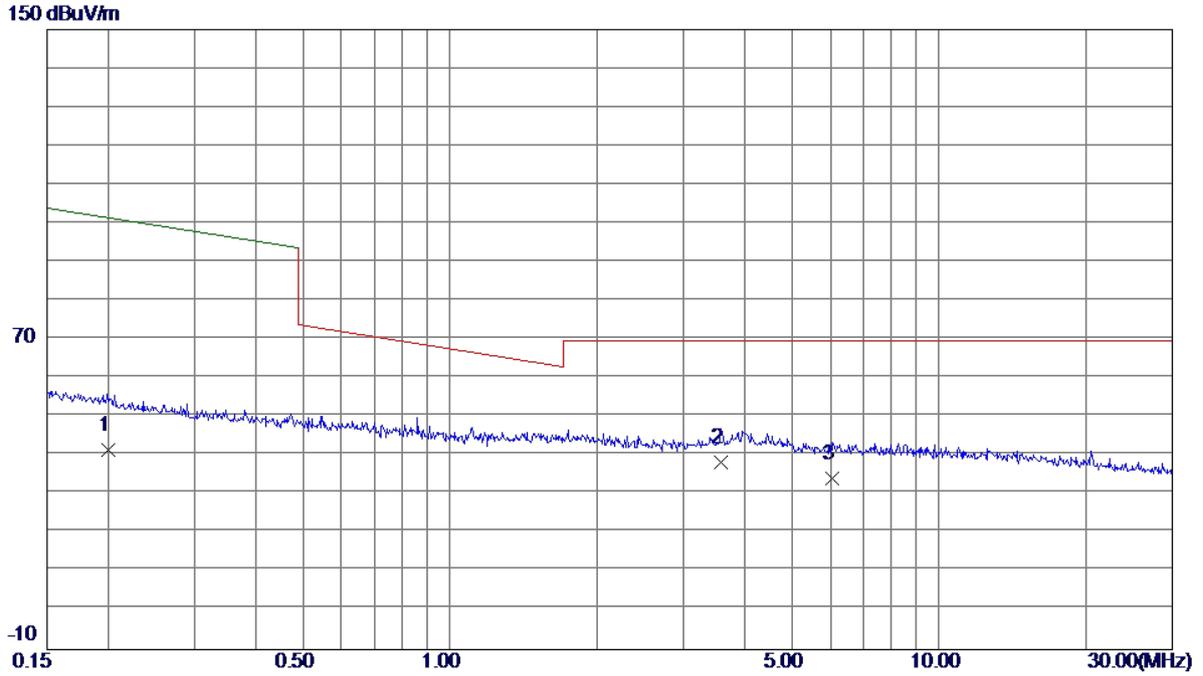

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.1997	22.80	18.69	41.49	103.72	-62.23	AVG	
2 *	3.5843	20.30	17.87	38.17	69.54	-31.37	QP	
3	6.0562	17.60	16.50	34.10	69.54	-35.44	QP	

Test Mode: TX Mode (Adapter:HUNTKEY)


**Ant 90°**

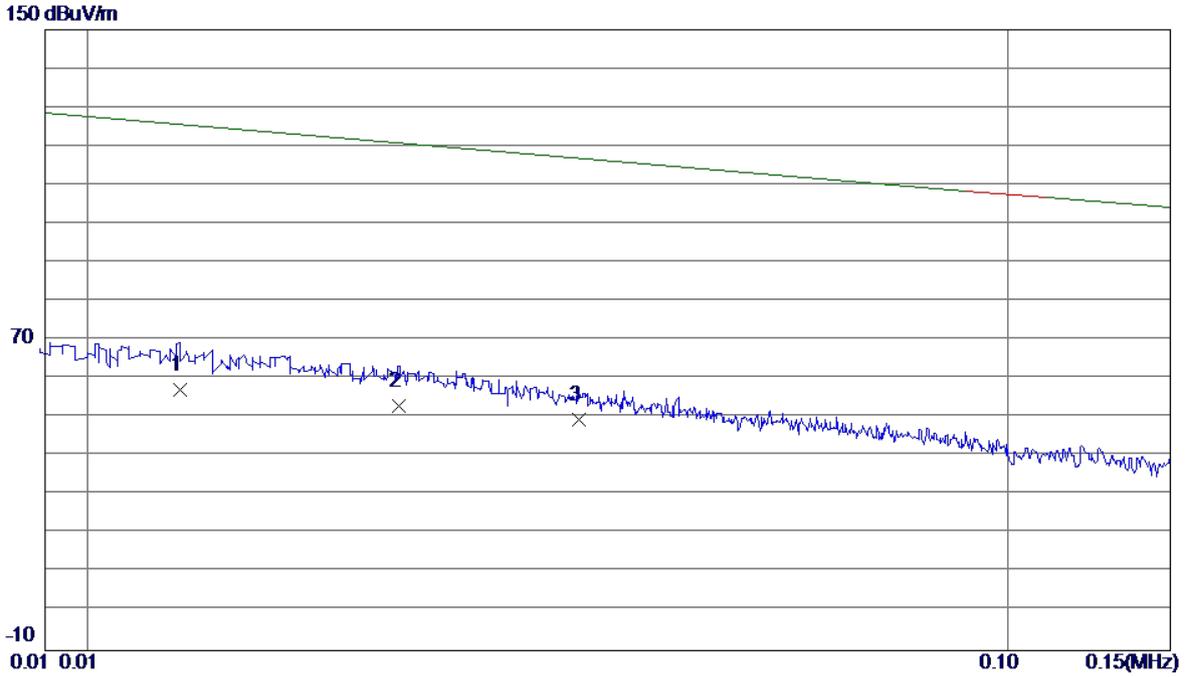

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.0126	33.30	23.96	57.26	127.61	-70.35	AVG	
2	0.0218	29.60	23.30	52.90	125.33	-72.43	AVG	
3	0.0342	27.60	21.77	49.37	122.27	-72.90	AVG	

Test Mode: TX Mode (Adapter:HUNTKEY)


Ant 90°

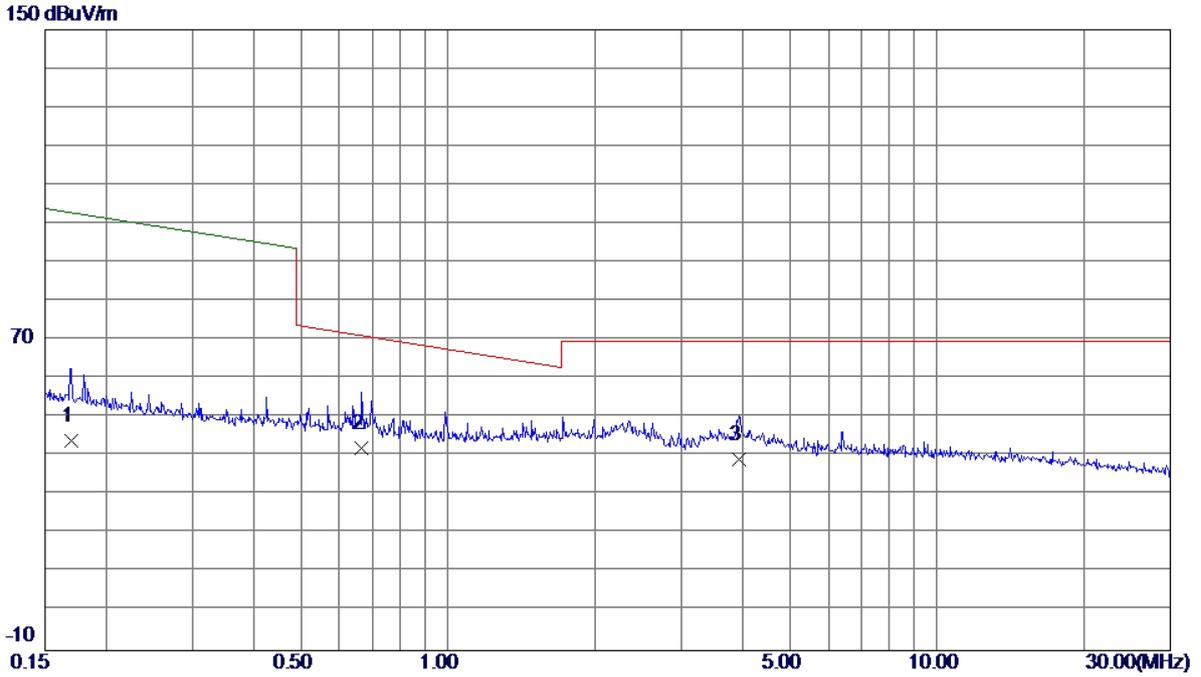

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.1694	25.30	18.72	44.02	104.75	-60.73	AVG	
2 *	0.6648	23.70	18.44	42.14	72.24	-30.10	QP	
3	3.9430	20.60	18.63	39.23	69.54	-30.31	QP	

Test Mode: TX Mode (Adapter:Salcomp)


Ant 0°

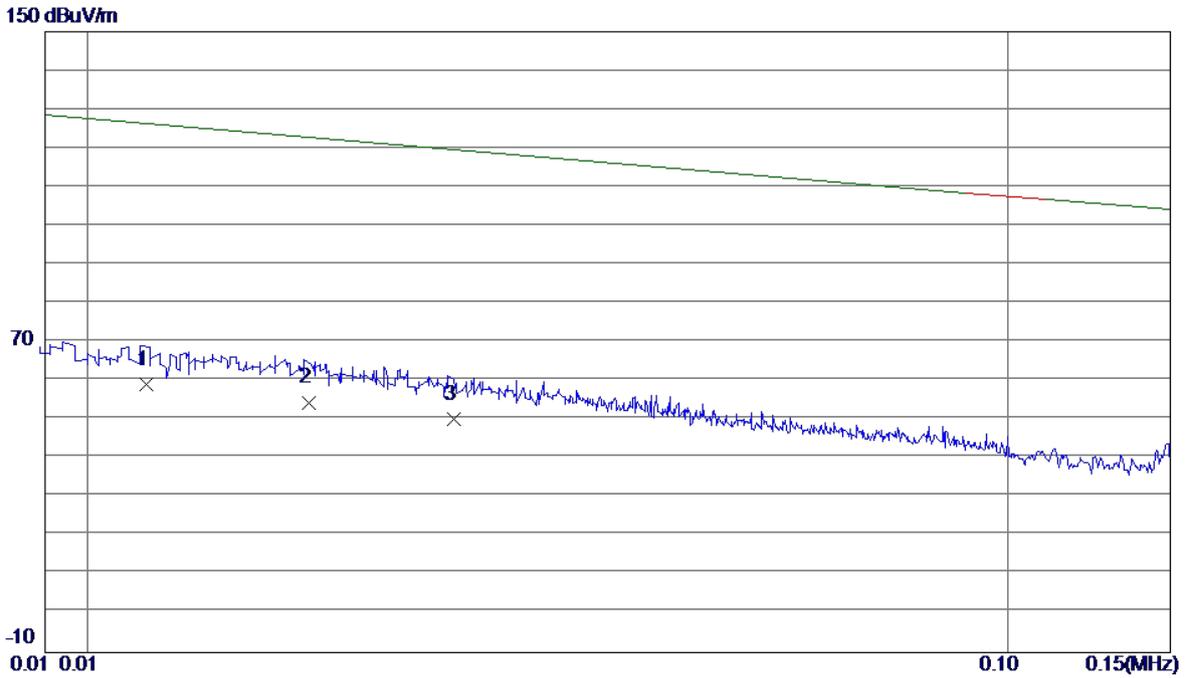

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.0116	35.10	24.02	59.12	127.85	-68.73	AVG	
2	0.0174	30.80	23.68	54.48	126.42	-71.94	AVG	
3	0.0250	27.21	22.91	50.12	124.54	-74.42	AVG	

Test Mode: TX Mode (Adapter:Salcomp)


Ant 0°

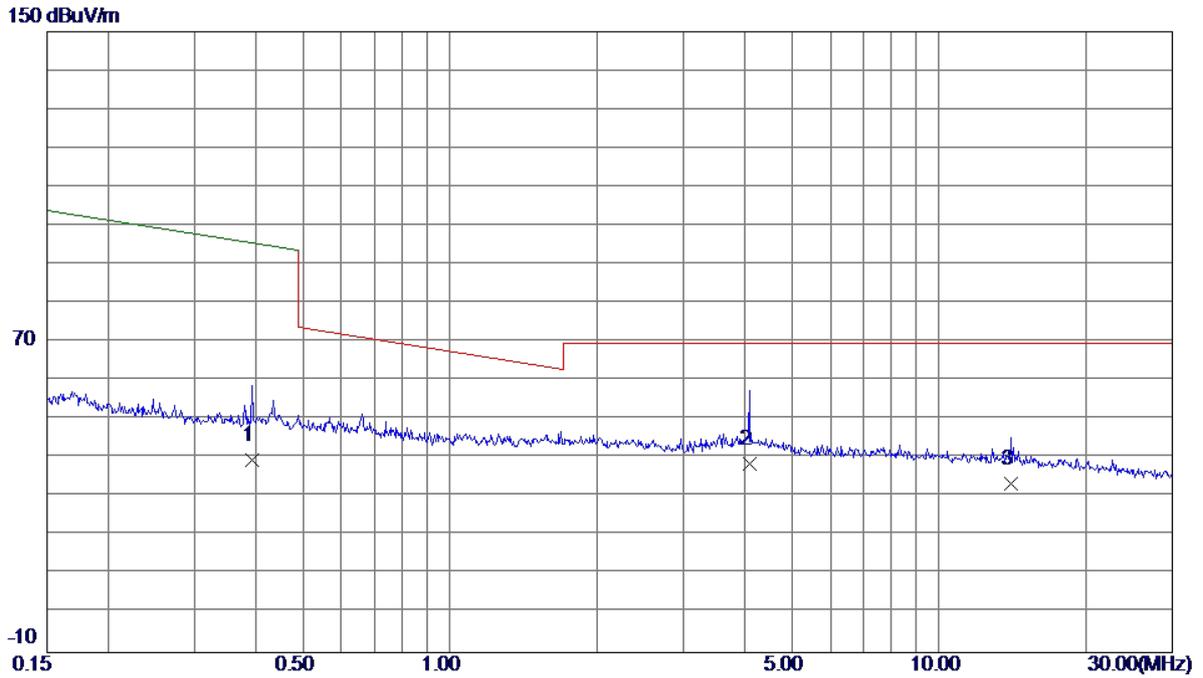

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.3933	21.20	18.49	39.69	97.10	-57.41	AVG	
2 *	4.0920	20.11	18.56	38.67	69.54	-30.87	QP	
3	14.0630	17.80	15.72	33.52	69.54	-36.02	QP	

Test Mode: TX Mode (Adapter:Salcomp)


Ant 90°

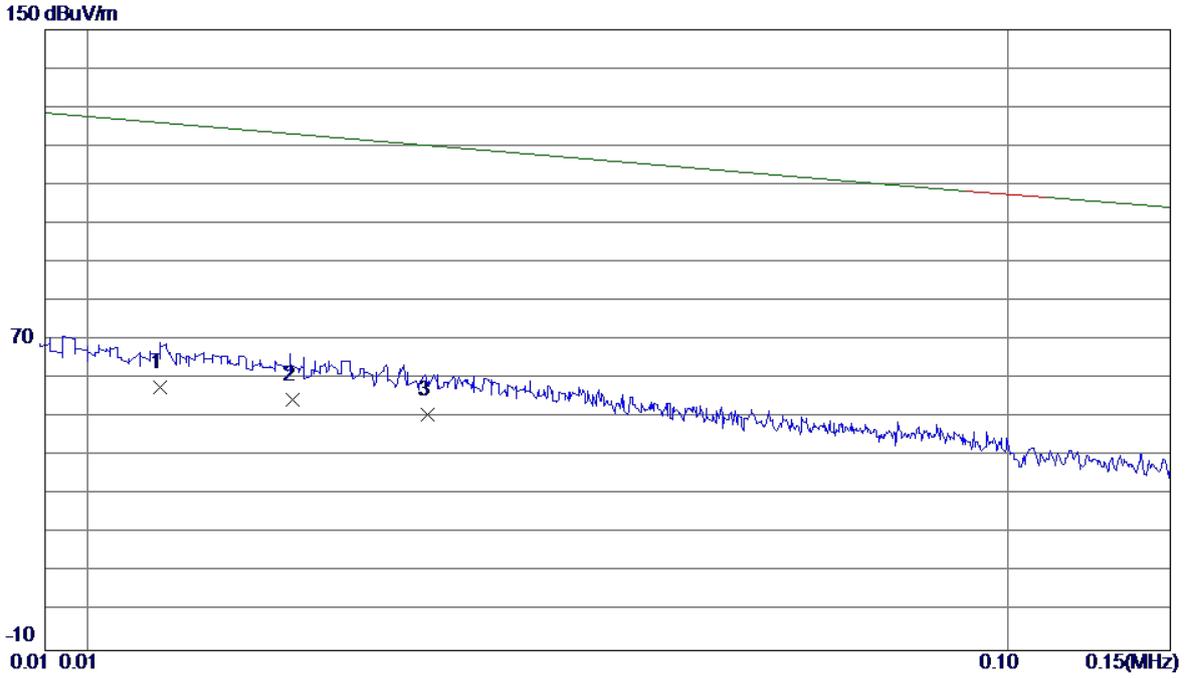

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.0120	33.70	24.00	57.70	127.75	-70.05	AVG	
2	0.0167	30.80	23.72	54.52	126.59	-72.07	AVG	
3	0.0234	27.70	23.10	50.80	124.94	-74.14	AVG	

Test Mode: TX Mode (Adapter:Salcomp)

Ant 90°

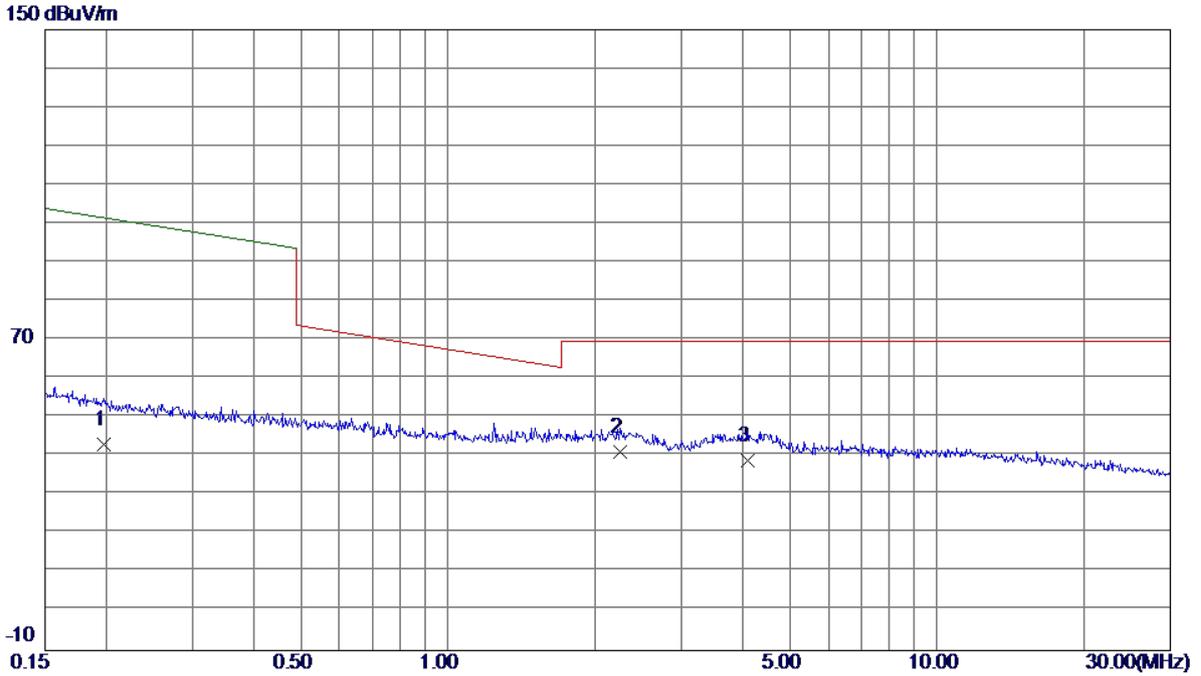


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.1976	24.29	18.70	42.99	103.79	-60.80	AVG	
2 *	2.2486	23.60	17.59	41.19	69.54	-28.35	QP	
3	4.0920	20.31	18.56	38.87	69.54	-30.67	QP	

**ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)**

Test Mode: UNII-1/TX A Mode 5180MHz (Adapter:PHITEK)


**Vertical**

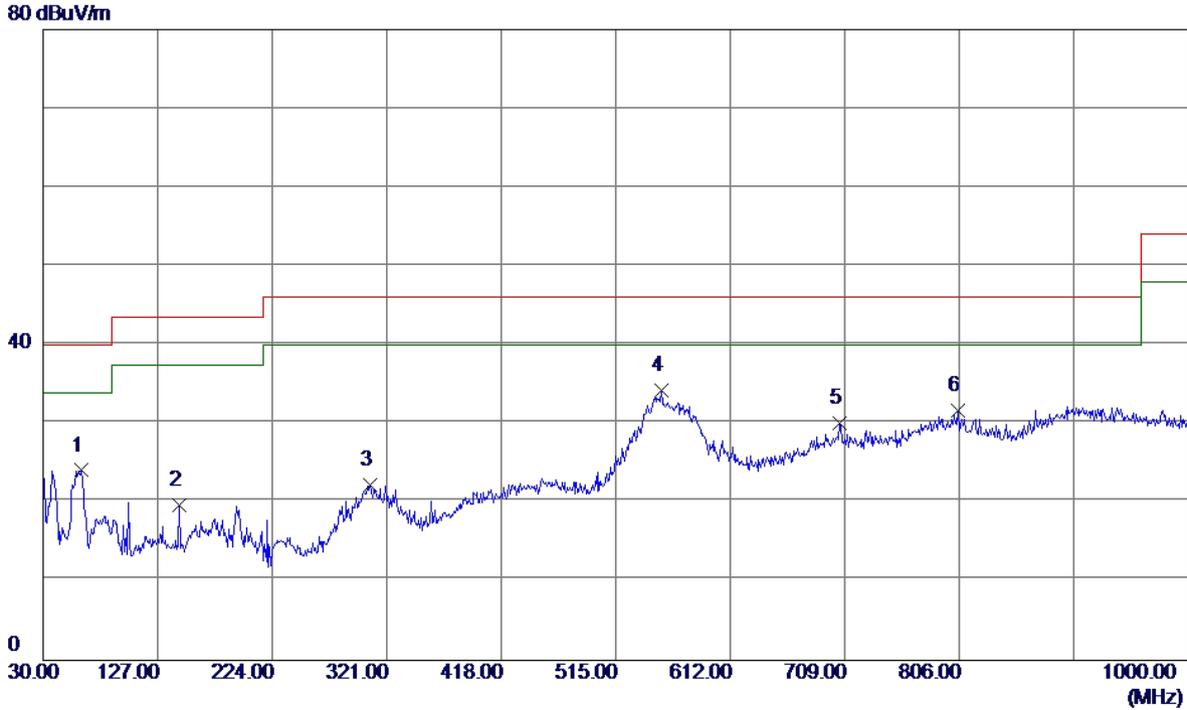

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	62.0100	38.38	-14.30	24.08	40.00	-15.92	Peak	
2	145.4299	32.95	-13.32	19.63	43.50	-23.87	Peak	
3	307.4200	32.53	-10.32	22.21	46.00	-23.79	Peak	
4 *	553.8000	38.96	-4.73	34.23	46.00	-11.77	Peak	
5	705.1200	32.13	-2.09	30.04	46.00	-15.96	Peak	
6	805.0300	31.55	0.11	31.66	46.00	-14.34	Peak	


Test Mode: UNII-1/TX A Mode 5180MHz (Adapter:PHITEK)

**Horizontal**

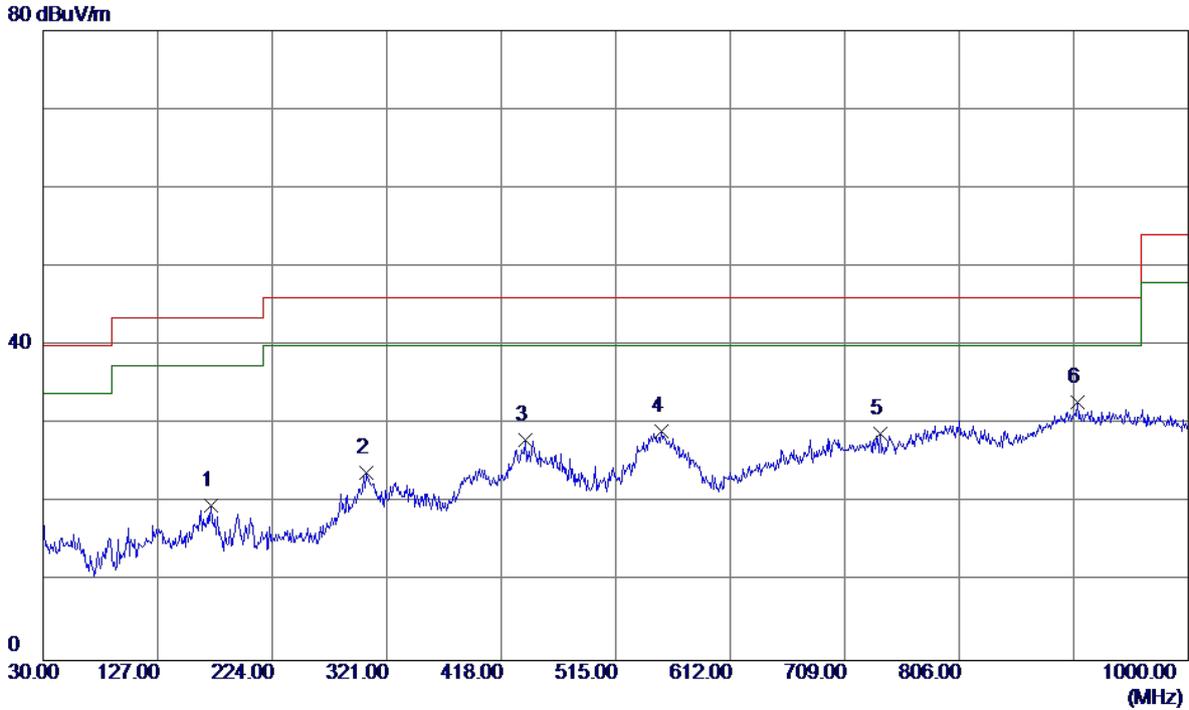

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	172.5900	32.02	-12.40	19.62	43.50	-23.88	Peak	
2	303.5400	34.15	-10.24	23.91	46.00	-22.09	Peak	
3	438.3700	35.96	-7.95	28.01	46.00	-17.99	Peak	
4	553.8000	33.81	-4.73	29.08	46.00	-16.92	Peak	
5	739.0700	30.76	-2.00	28.76	46.00	-17.24	Peak	
6 *	905.9100	30.15	2.62	32.77	46.00	-13.23	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz (Adapter:PHITEK)

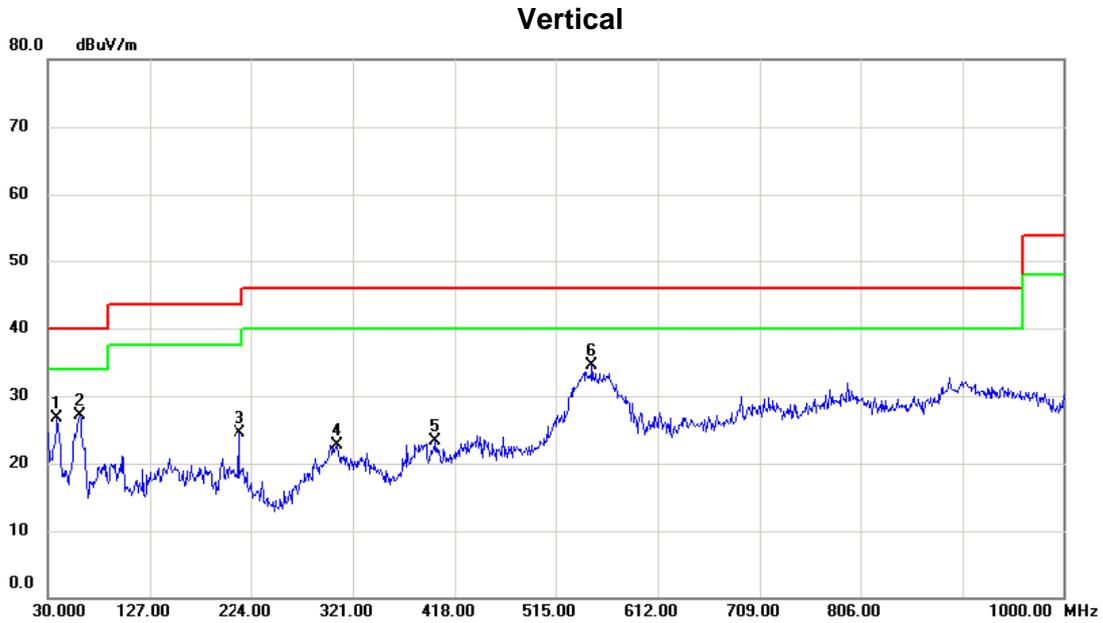

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		38.730	40.73	-14.06	26.67	40.00	-13.33	peak	
2		60.070	40.85	-13.74	27.11	40.00	-12.89	peak	
3		212.360	39.01	-14.56	24.45	43.50	-19.05	peak	
4		305.480	33.06	-10.28	22.78	46.00	-23.22	peak	
5		399.570	31.20	-7.81	23.39	46.00	-22.61	peak	
6	*	549.920	39.07	-4.55	34.52	46.00	-11.48	peak	


Test Mode: UNII-1/TX A Mode 5240MHz (Adapter:PHITEK)

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		44.550	31.42	-12.90	18.52	40.00	-21.48	peak	
2		171.620	32.57	-12.33	20.24	43.50	-23.26	peak	
3		304.510	34.96	-10.25	24.71	46.00	-21.29	peak	
4		437.400	35.25	-7.95	27.30	46.00	-18.70	peak	
5		556.710	34.96	-4.88	30.08	46.00	-15.92	peak	
6	*	789.510	30.91	-0.20	30.71	46.00	-15.29	peak	


Test Mode: UNII-2A/TX A Mode 5260MHz (Adapter:PHITEK)

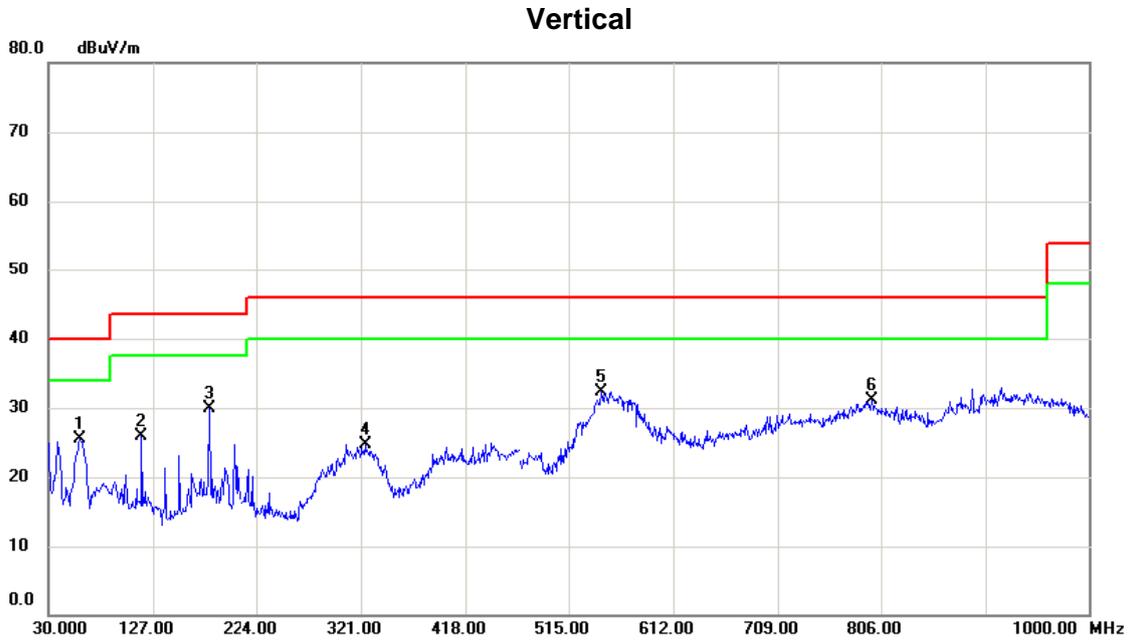

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		59.100	39.23	-13.78	25.45	40.00	-14.55	peak	
2		116.330	39.81	-13.89	25.92	43.50	-17.58	peak	
3		179.380	42.64	-12.80	29.84	43.50	-13.66	peak	
4		324.880	35.45	-10.69	24.76	46.00	-21.24	peak	
5	*	545.070	37.41	-5.04	32.37	46.00	-13.63	peak	
6		797.270	30.90	0.15	31.05	46.00	-14.95	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz (Adapter:PHITEK)


**Horizontal**

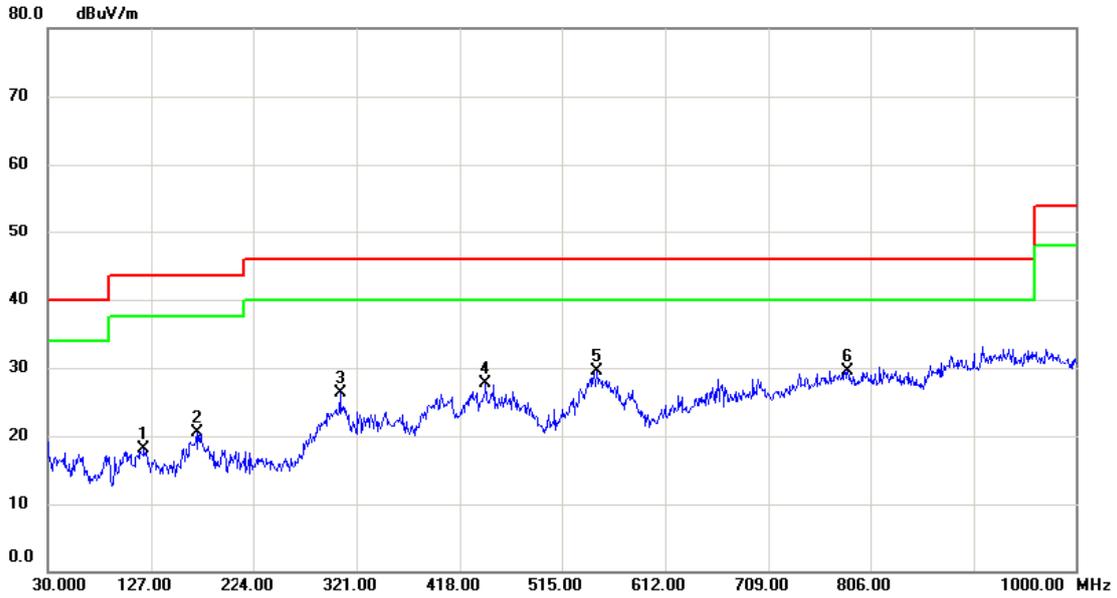

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		120.210	31.47	-13.43	18.04	43.50	-25.46	peak	
2		169.680	32.64	-12.23	20.41	43.50	-23.09	peak	
3		305.480	36.58	-10.28	26.30	46.00	-19.70	peak	
4		442.250	35.72	-7.97	27.75	46.00	-18.25	peak	
5		547.980	34.30	-4.75	29.55	46.00	-16.45	peak	
6	*	784.660	30.00	-0.42	29.58	46.00	-16.42	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz (Adapter:PHITEK)


**Vertical**

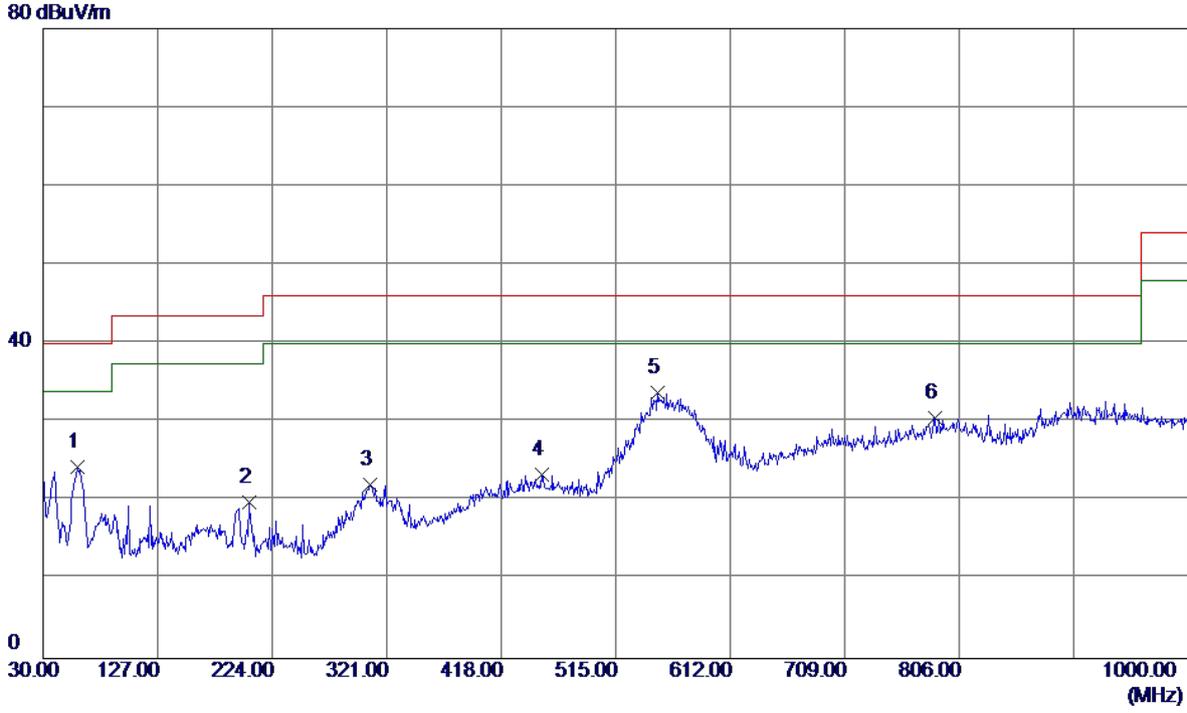

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	59.1000	38.09	-13.77	24.32	40.00	-15.68	Peak	
2	204.6000	34.36	-14.53	19.83	43.50	-23.67	Peak	
3	307.4200	32.41	-10.32	22.09	46.00	-23.91	Peak	
4	452.9200	31.52	-8.10	23.42	46.00	-22.58	Peak	
5 *	550.8900	38.39	-4.58	33.81	46.00	-12.19	Peak	
6	785.6300	30.94	-0.38	30.56	46.00	-15.44	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz (Adapter:PHITEK)

**Horizontal**

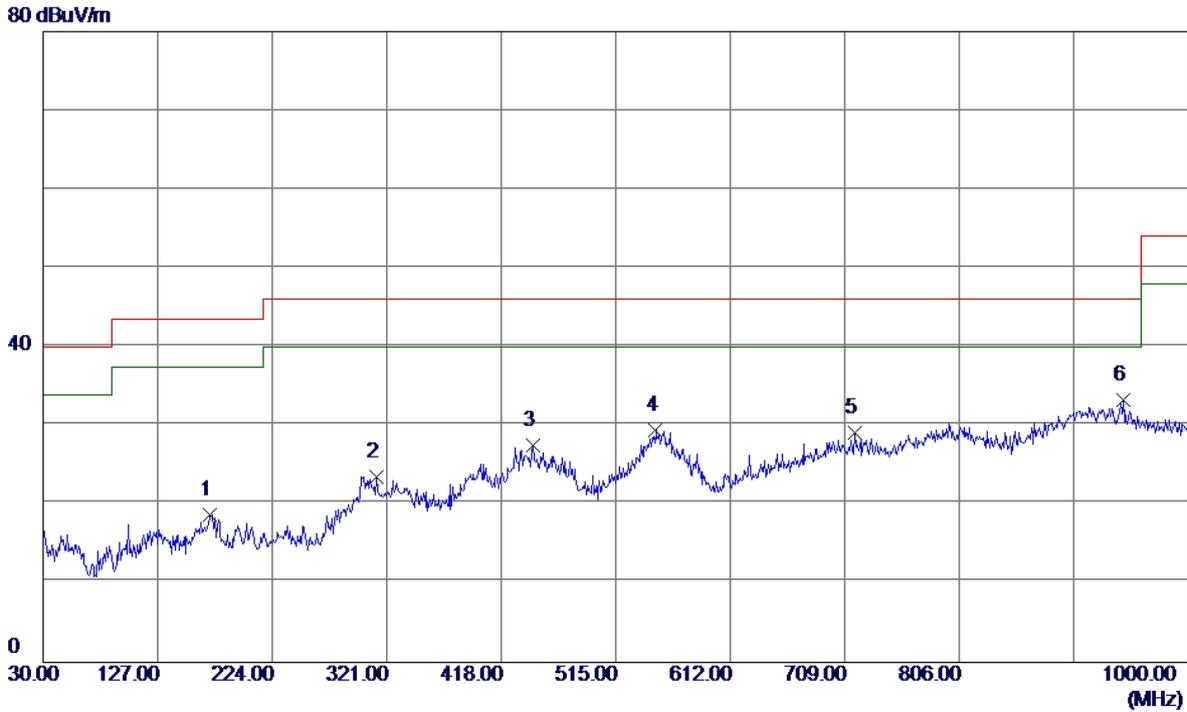


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	171.6200	31.09	-12.34	18.75	43.50	-24.75	Peak	
2	312.2700	33.97	-10.42	23.55	46.00	-22.45	Peak	
3	445.1600	35.45	-7.98	27.47	46.00	-18.53	Peak	
4	548.9500	34.05	-4.65	29.40	46.00	-16.60	Peak	
5	717.7300	31.22	-2.05	29.17	46.00	-16.83	Peak	
6 *	944.7100	30.82	2.46	33.28	46.00	-12.72	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz (Adapter:PHITEK)

**Vertical**


80 dBuV/m

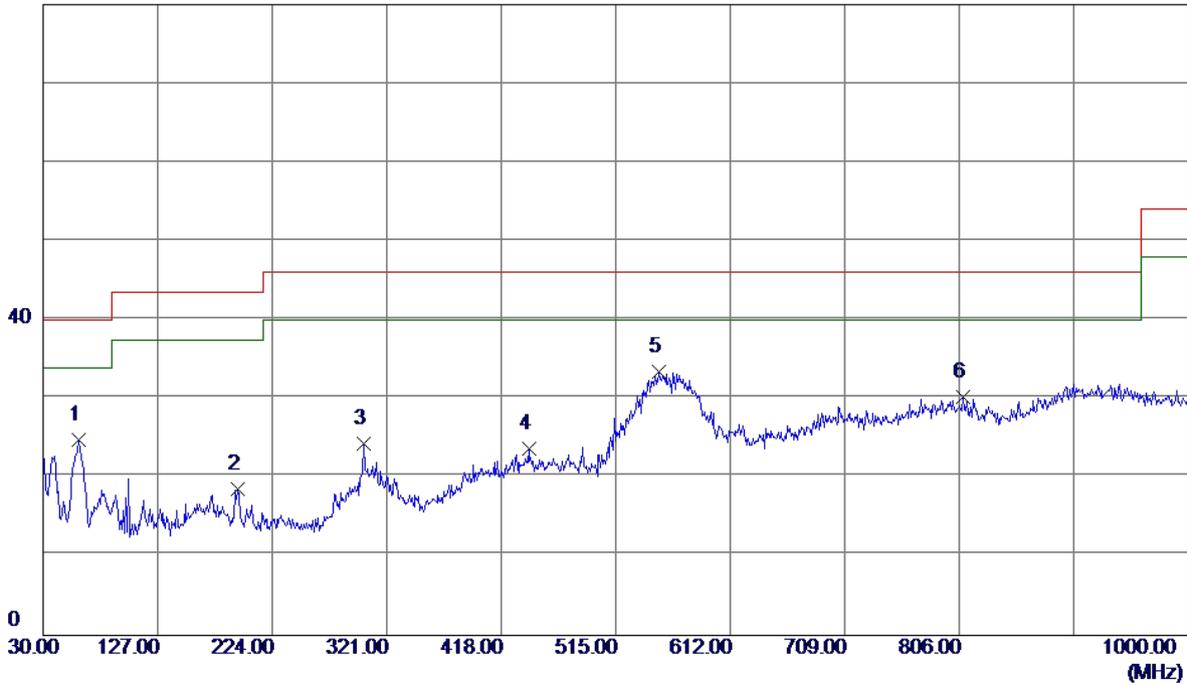

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	60.0700	38.60	-13.74	24.86	40.00	-15.14	Peak	
2	194.9000	32.77	-14.18	18.59	43.50	-24.91	Peak	
3	301.6000	34.56	-10.19	24.37	46.00	-21.63	Peak	
4	441.2800	31.69	-7.96	23.73	46.00	-22.27	Peak	
5 *	551.8600	38.09	-4.63	33.46	46.00	-12.54	Peak	
6	808.9099	30.19	-0.01	30.18	46.00	-15.82	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz (Adapter:PHITEK)


**Horizontal**

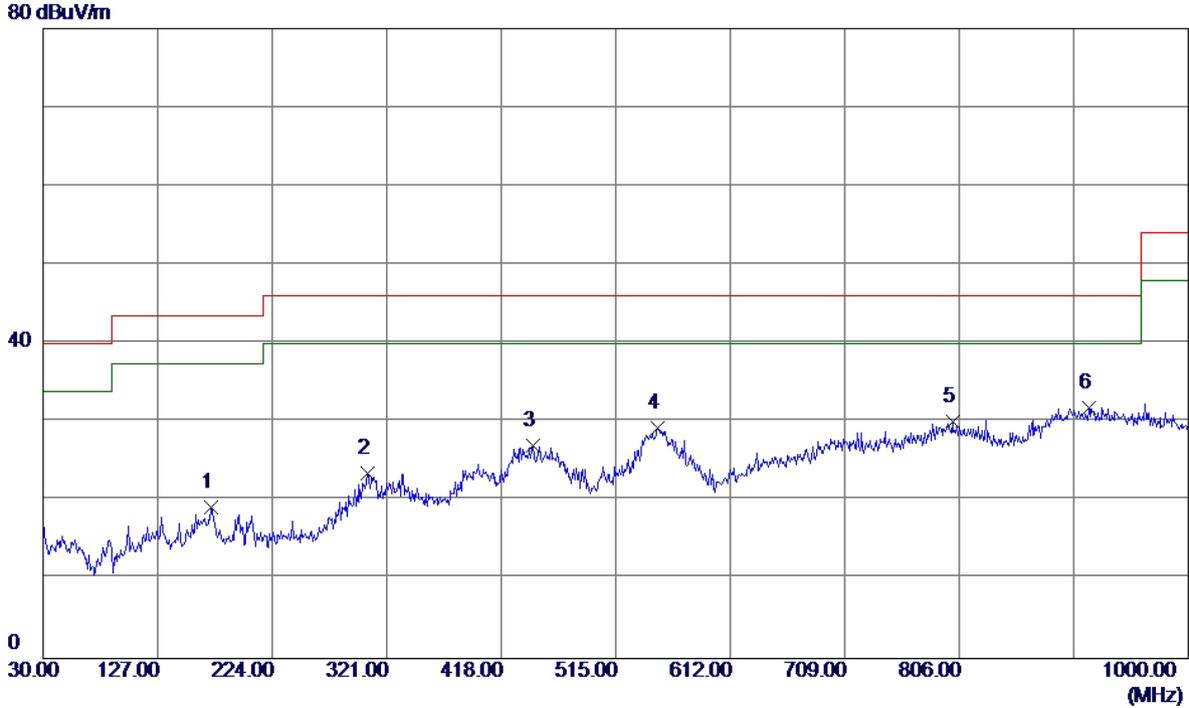

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	172.5900	31.54	-12.40	19.14	43.50	-24.36	Peak	
2	304.5100	33.84	-10.26	23.58	46.00	-22.42	Peak	
3	445.1600	35.03	-7.98	27.05	46.00	-18.95	Peak	
4	550.8900	33.93	-4.58	29.35	46.00	-16.65	Peak	
5	800.1800	29.80	0.25	30.05	46.00	-15.95	Peak	
6 *	915.6100	29.30	2.58	31.88	46.00	-14.12	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz (Adapter:PHITEK)


**Vertical**

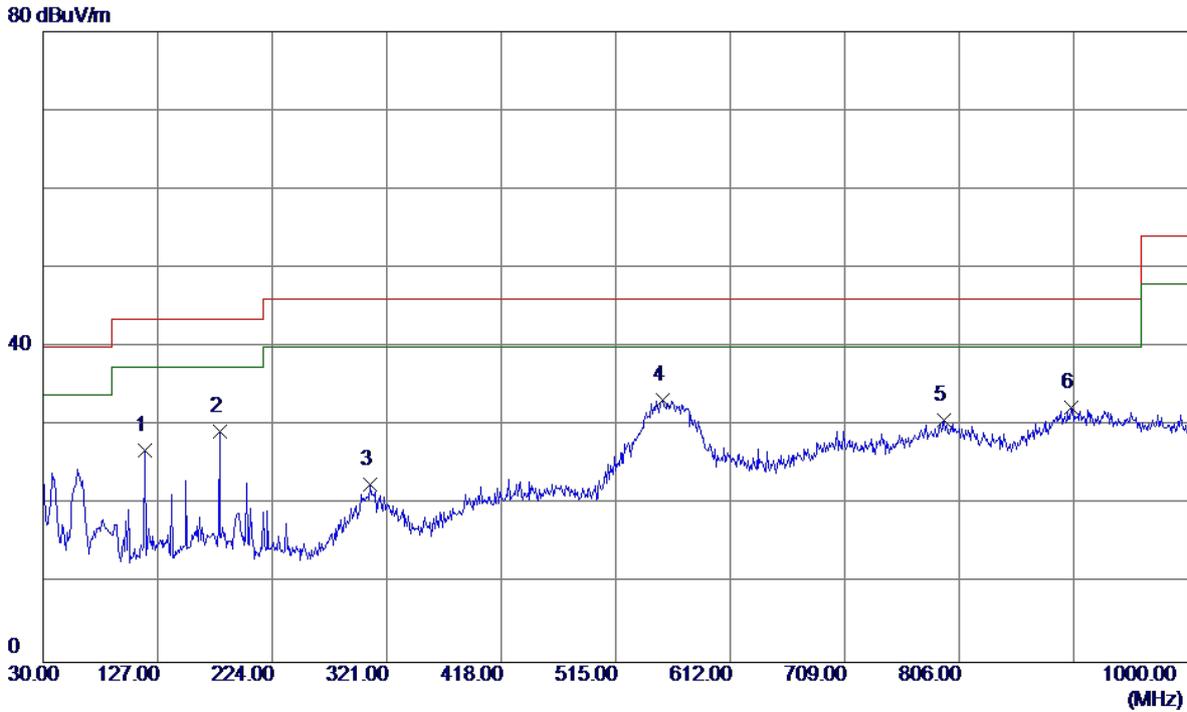

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	116.3300	40.82	-13.90	26.92	43.50	-16.58	Peak	
2	179.3800	42.14	-12.80	29.34	43.50	-14.16	Peak	
3	307.4200	32.93	-10.32	22.61	46.00	-23.39	Peak	
4 *	554.7700	38.03	-4.78	33.25	46.00	-12.75	Peak	
5	793.3900	30.76	-0.03	30.73	46.00	-15.27	Peak	
6	901.0600	29.74	2.64	32.38	46.00	-13.62	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz (Adapter:PHITEK)


**Horizontal**

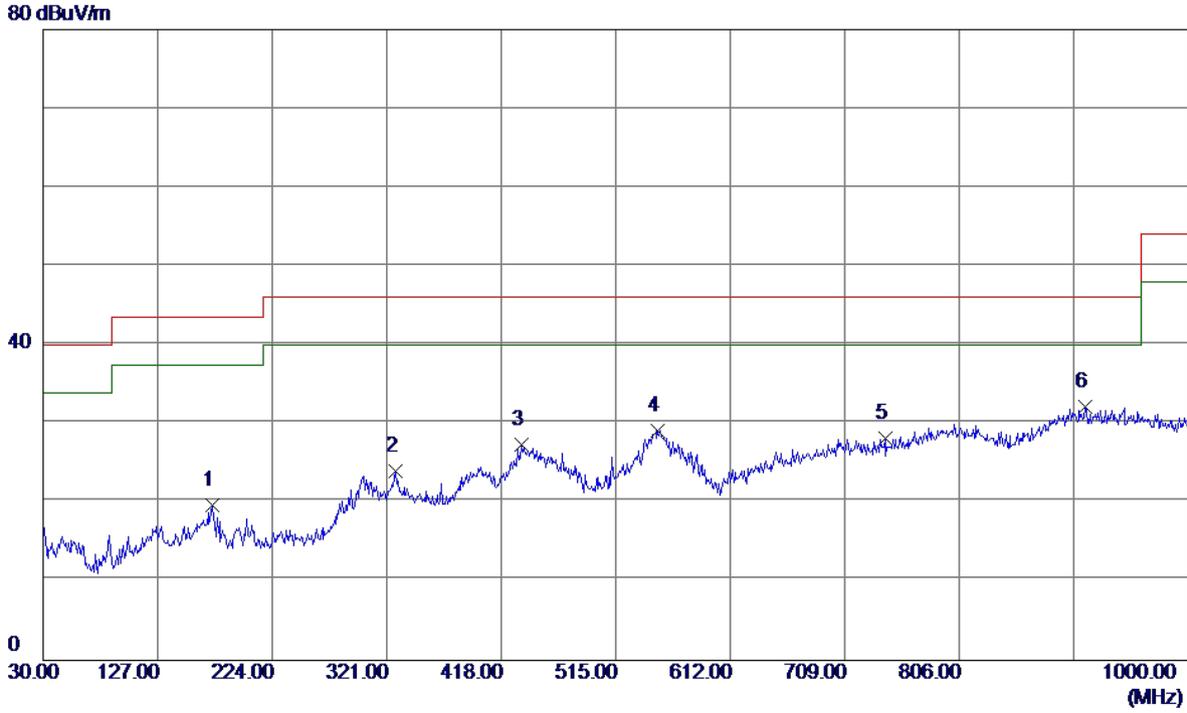

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	173.5600	32.10	-12.45	19.65	43.50	-23.85	Peak	
2	328.7600	34.73	-10.77	23.96	46.00	-22.04	Peak	
3	435.4600	35.37	-7.94	27.43	46.00	-18.57	Peak	
4	550.8900	33.72	-4.58	29.14	46.00	-16.86	Peak	
5	742.9500	30.15	-1.99	28.16	46.00	-17.84	Peak	
6 *	912.7000	29.55	2.59	32.14	46.00	-13.86	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz (Adapter:PHITEK)


**Vertical**

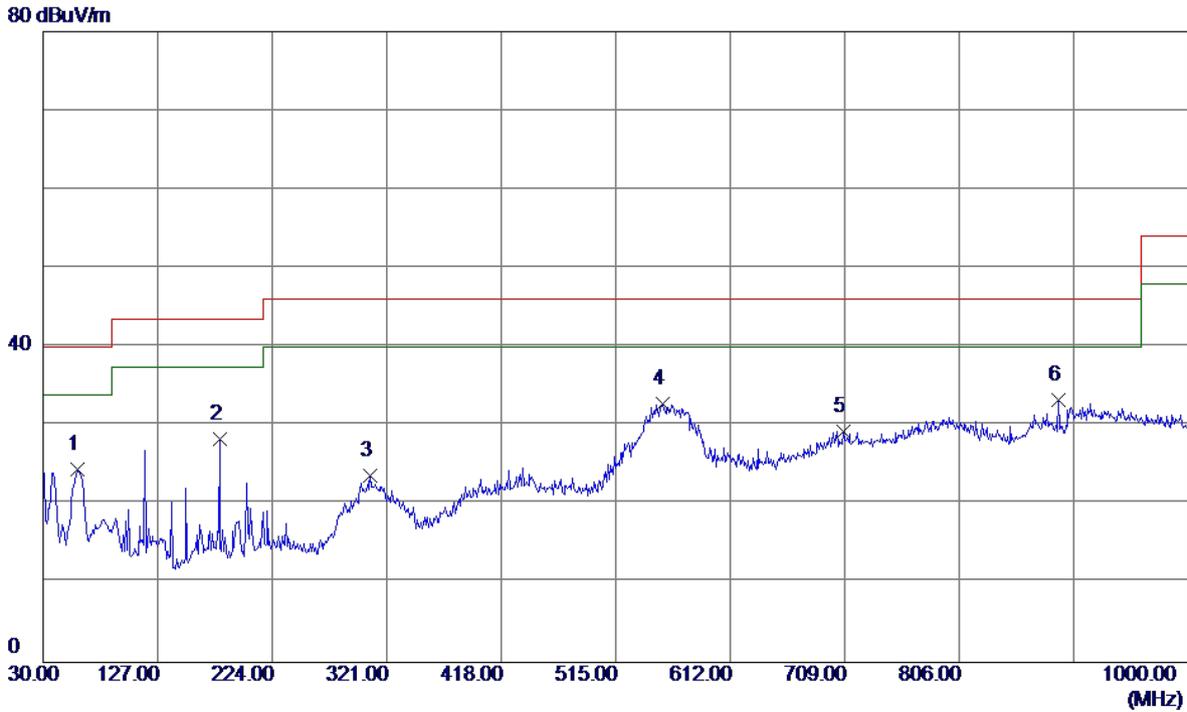

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	59.1000	38.22	-13.77	24.45	40.00	-15.55	Peak	
2	179.3800	41.14	-12.80	28.34	43.50	-15.16	Peak	
3	307.4200	33.93	-10.32	23.61	46.00	-22.39	Peak	
4	554.7700	37.53	-4.78	32.75	46.00	-13.25	Peak	
5	708.0300	31.41	-2.08	29.33	46.00	-16.67	Peak	
6 *	890.3900	31.33	1.89	33.22	46.00	-12.78	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz (Adapter:PHITEK)


Horizontal

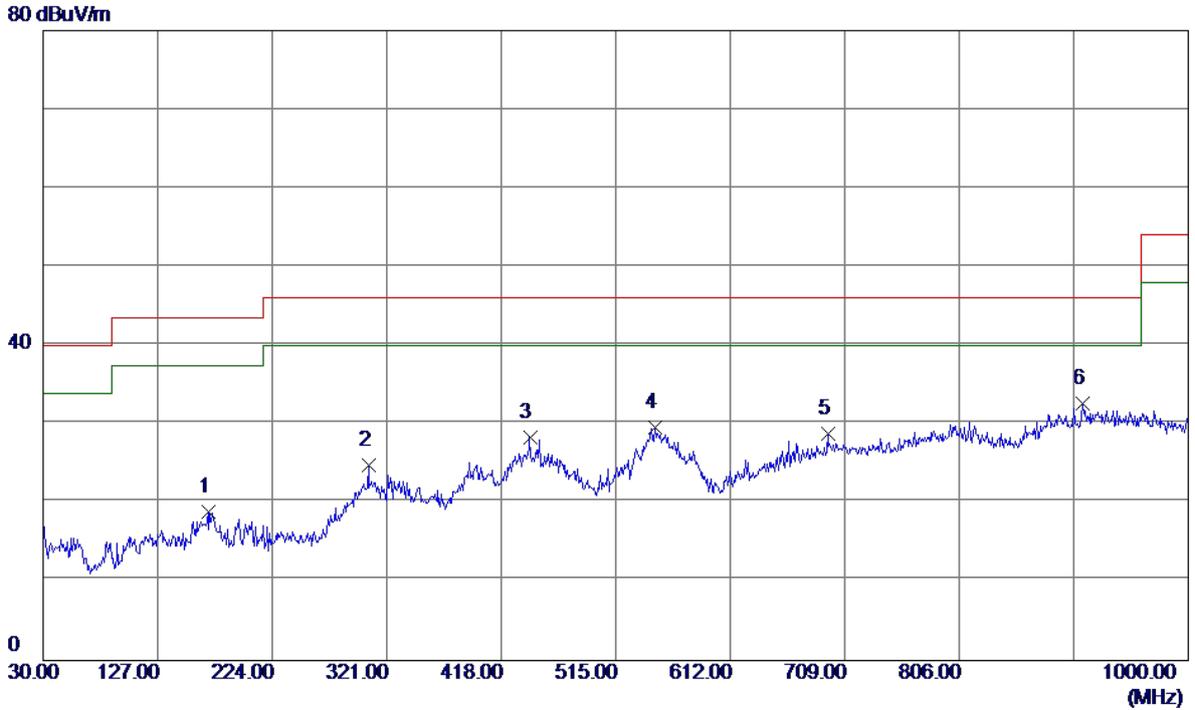

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	169.6799	31.15	-12.24	18.91	43.50	-24.59	Peak	
2	305.4800	35.08	-10.28	24.80	46.00	-21.20	Peak	
3	442.2500	36.22	-7.97	28.25	46.00	-17.75	Peak	
4	547.9800	34.30	-4.75	29.55	46.00	-16.45	Peak	
5	694.4500	31.19	-2.33	28.86	46.00	-17.14	Peak	
6 *	910.7600	30.09	2.60	32.69	46.00	-13.31	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter:PHITEK)


Vertical

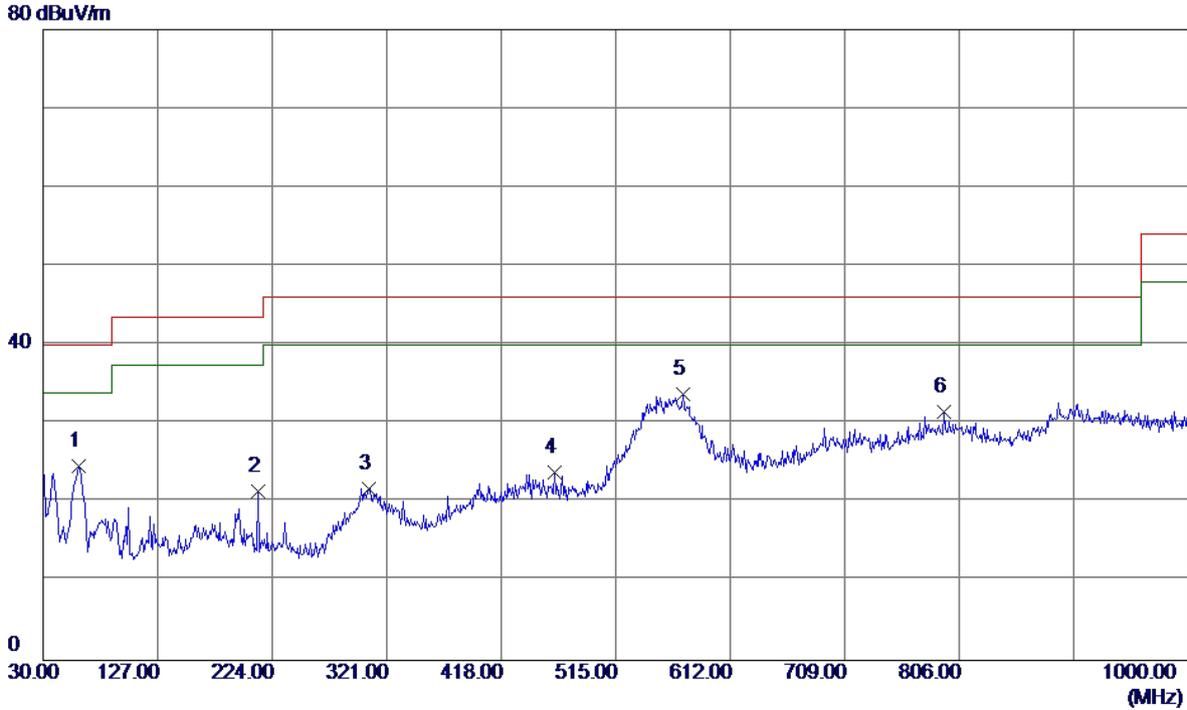

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	60.0700	38.35	-13.74	24.61	40.00	-15.39	Peak	
2	212.3600	36.00	-14.55	21.45	43.50	-22.05	Peak	
3	305.4800	32.06	-10.28	21.78	46.00	-24.22	Peak	
4	463.5900	32.35	-8.47	23.88	46.00	-22.12	Peak	
5 *	572.2300	39.35	-5.66	33.69	46.00	-12.31	Peak	
6	793.3900	31.51	-0.03	31.48	46.00	-14.52	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter:PHITEK)


**Horizontal**

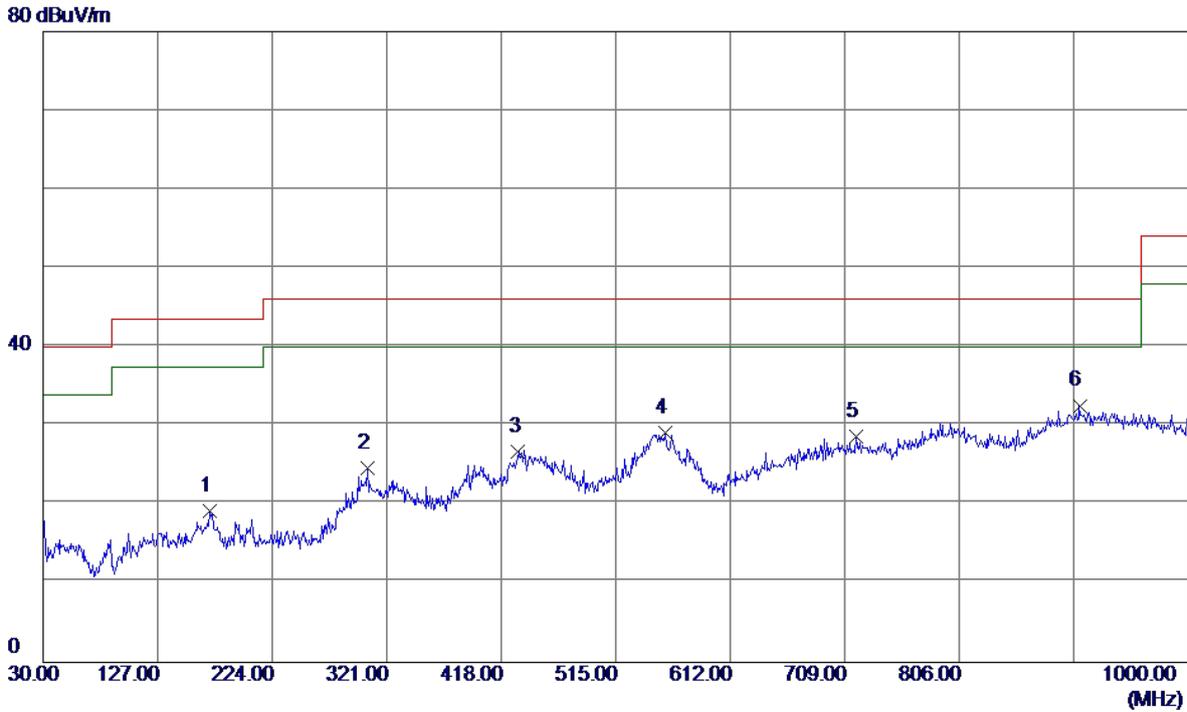

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	171.6200	31.58	-12.34	19.24	43.50	-24.26	Peak	
2	304.5100	34.97	-10.26	24.71	46.00	-21.29	Peak	
3	432.5500	34.62	-7.92	26.70	46.00	-19.30	Peak	
4	556.7100	33.96	-4.88	29.08	46.00	-16.92	Peak	
5	718.7000	30.63	-2.05	28.58	46.00	-17.42	Peak	
6 *	907.8500	29.95	2.61	32.56	46.00	-13.44	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz (Adapter:HUNTKEY)


**Vertical**

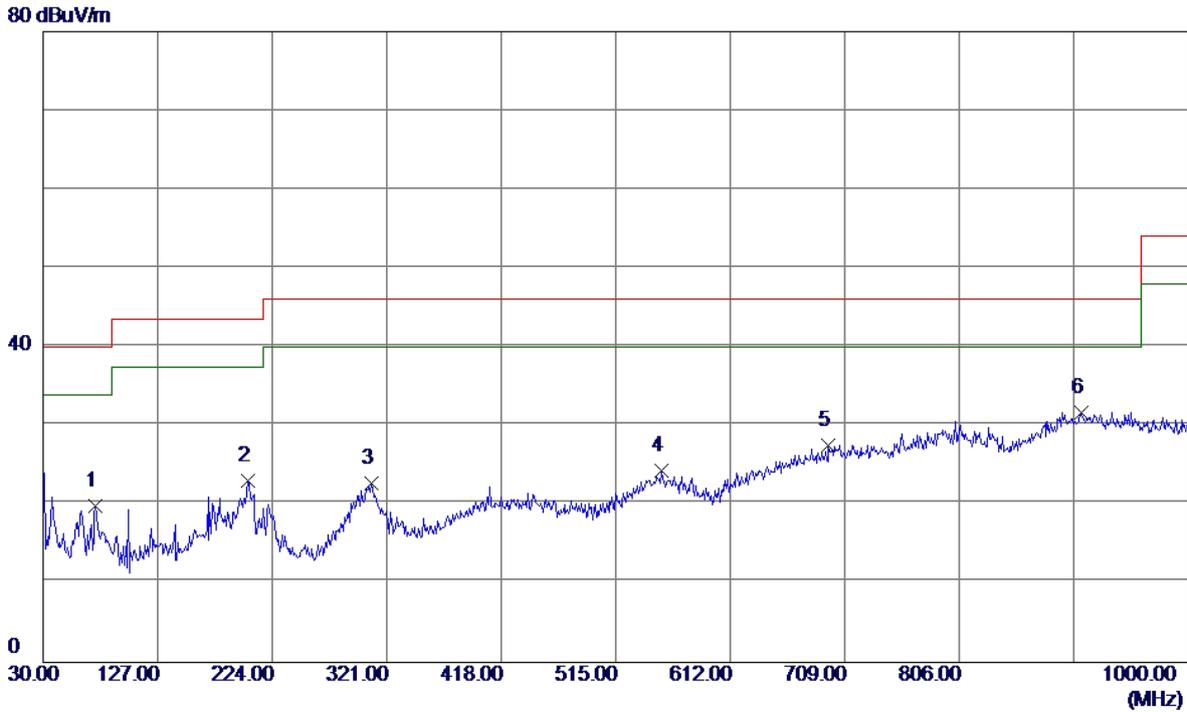

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	74.6200	36.45	-16.58	19.87	40.00	-20.13	Peak	
2	203.6300	37.49	-14.51	22.98	43.50	-20.52	Peak	
3	308.3900	33.05	-10.34	22.71	46.00	-23.29	Peak	
4	553.8000	29.02	-4.73	24.29	46.00	-21.71	Peak	
5	695.4200	29.85	-2.29	27.56	46.00	-18.44	Peak	
6 *	909.7900	29.15	2.60	31.75	46.00	-14.25	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz (Adapter:HUNTKEY)

**Horizontal**

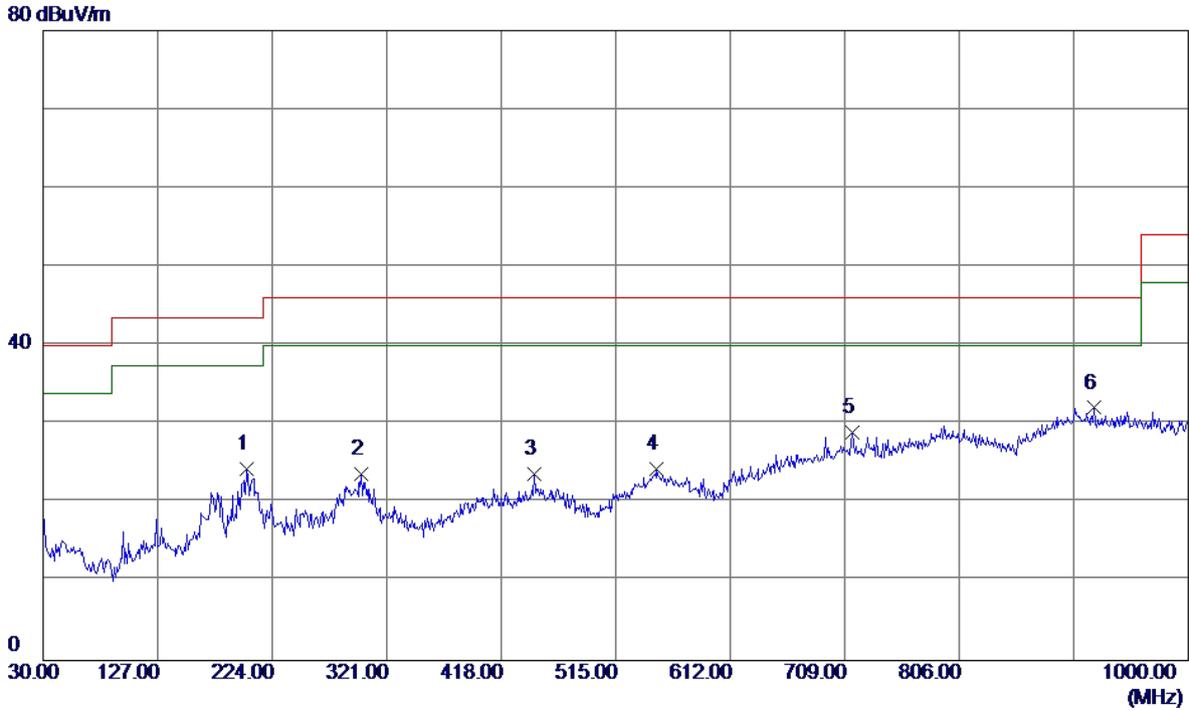

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	202.6600	38.78	-14.49	24.29	43.50	-19.21	Peak	
2	299.6600	33.90	-10.20	23.70	46.00	-22.30	Peak	
3	446.1300	31.65	-7.98	23.67	46.00	-22.33	Peak	
4	549.9200	28.87	-4.55	24.32	46.00	-21.68	Peak	
5	715.7900	30.98	-2.06	28.92	46.00	-17.08	Peak	
6 *	920.4600	29.52	2.56	32.08	46.00	-13.92	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz (Adapter:HUNTKEY)


Vertical



No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	44.550	34.42	-12.90	21.52	40.00	-18.48	peak	
2	203.630	38.85	-14.51	24.34	43.50	-19.16	peak	
3	306.450	32.25	-10.30	21.95	46.00	-24.05	peak	
4	407.330	32.20	-7.82	24.38	46.00	-21.62	peak	
5	554.770	30.76	-4.79	25.97	46.00	-20.03	peak	
6 *	733.250	31.49	-2.01	29.48	46.00	-16.52	peak	

Test Mode: UNII-1/TX A Mode 5240MHz (Adapter:HUNTKEY)

**Horizontal**

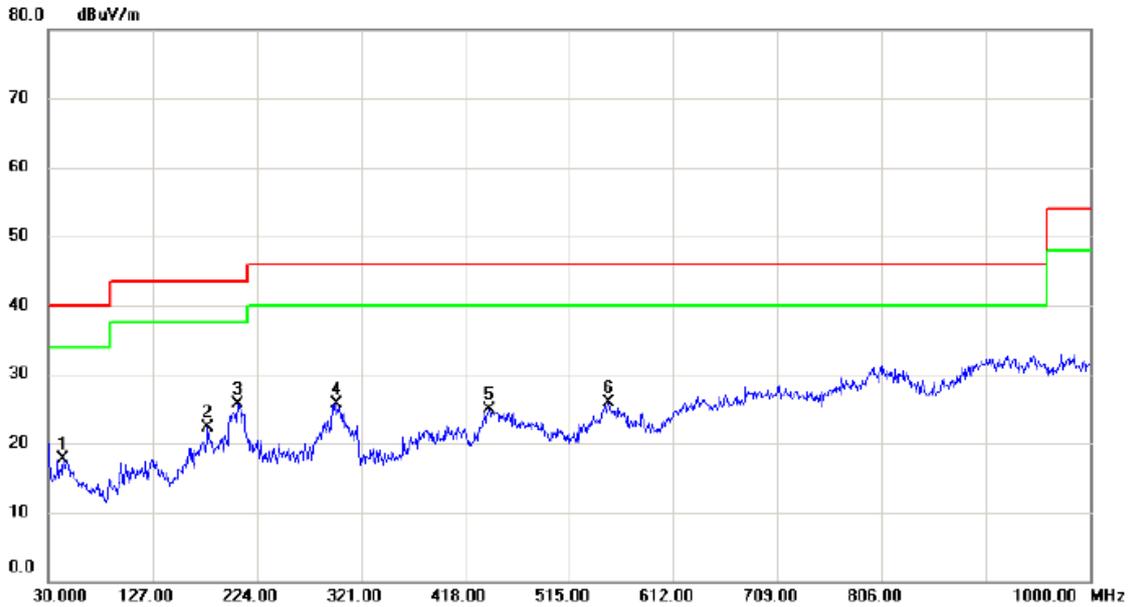

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		43.580	30.85	-13.15	17.70	40.00	-22.30	peak	
2		178.410	35.00	-12.75	22.25	43.50	-21.25	peak	
3	*	206.540	40.36	-14.58	25.78	43.50	-17.72	peak	
4		298.690	36.00	-10.30	25.70	46.00	-20.30	peak	
5		440.310	32.79	-7.95	24.84	46.00	-21.16	peak	
6		551.860	30.59	-4.63	25.96	46.00	-20.04	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz (Adapter:HUNTKEY)


**Vertical**



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		62.010	34.93	-14.30	20.63	40.00	-19.37	peak	
2		204.600	38.80	-14.53	24.27	43.50	-19.23	peak	
3		307.420	35.55	-10.32	25.23	46.00	-20.77	peak	
4		404.420	30.73	-7.80	22.93	46.00	-23.07	peak	
5		543.130	30.28	-5.25	25.03	46.00	-20.97	peak	
6	*	725.490	30.60	-2.03	28.57	46.00	-17.43	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz (Adapter:HUNTKEY)


**Horizontal**

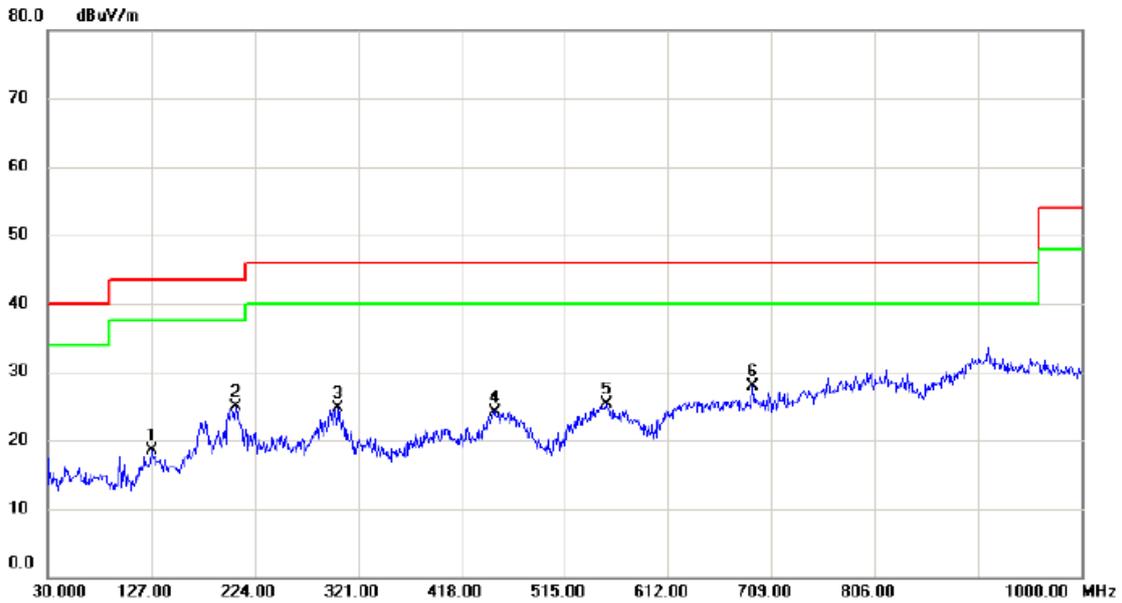

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		127.970	31.02	-12.58	18.44	43.50	-25.06	peak	
2		206.540	39.55	-14.58	24.97	43.50	-18.53	peak	
3		302.570	34.84	-10.21	24.63	46.00	-21.37	peak	
4		449.040	32.16	-8.00	24.16	46.00	-21.84	peak	
5		554.770	30.02	-4.79	25.23	46.00	-20.77	peak	
6 *		691.540	30.36	-2.45	27.91	46.00	-18.09	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz (Adapter:HUNTKEY)


**Vertical**

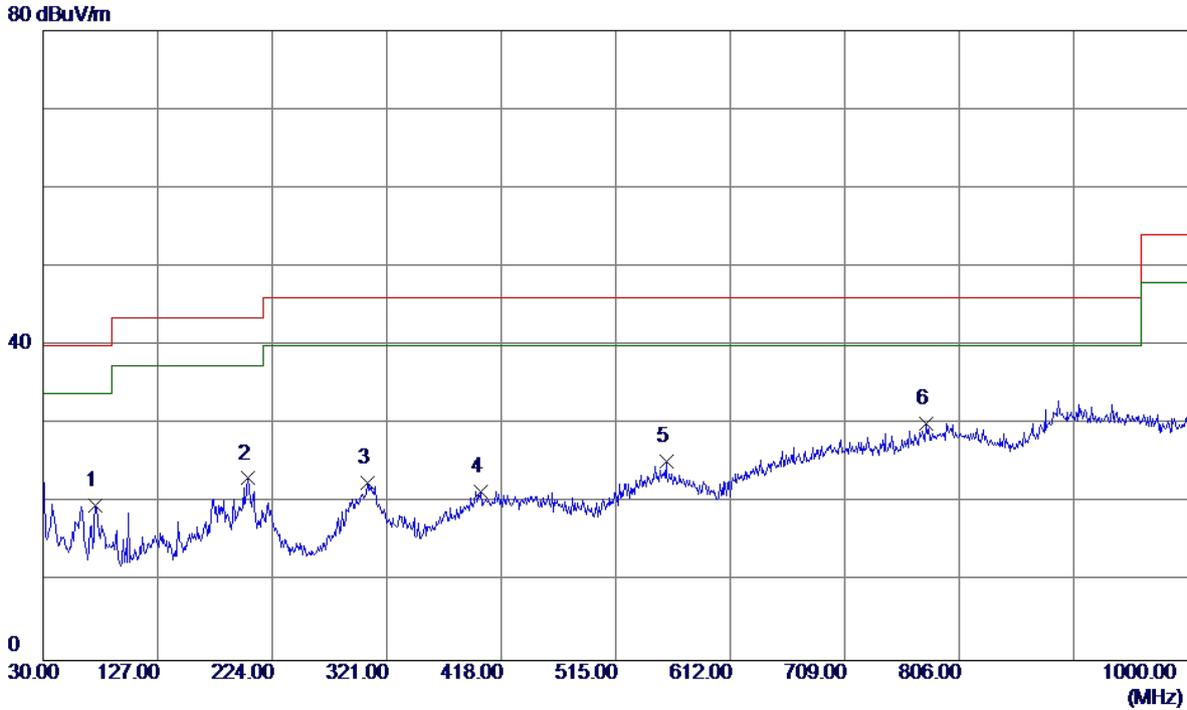

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	74.6200	36.21	-16.58	19.63	40.00	-20.37	Peak	
2	203.6300	37.63	-14.51	23.12	43.50	-20.38	Peak	
3	304.5100	32.84	-10.26	22.58	46.00	-23.42	Peak	
4	400.5400	29.24	-7.78	21.46	46.00	-24.54	Peak	
5	557.6800	30.24	-4.93	25.31	46.00	-20.69	Peak	
6 *	777.8700	30.88	-0.73	30.15	46.00	-15.85	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz (Adapter:HUNTKEY)


**Horizontal**

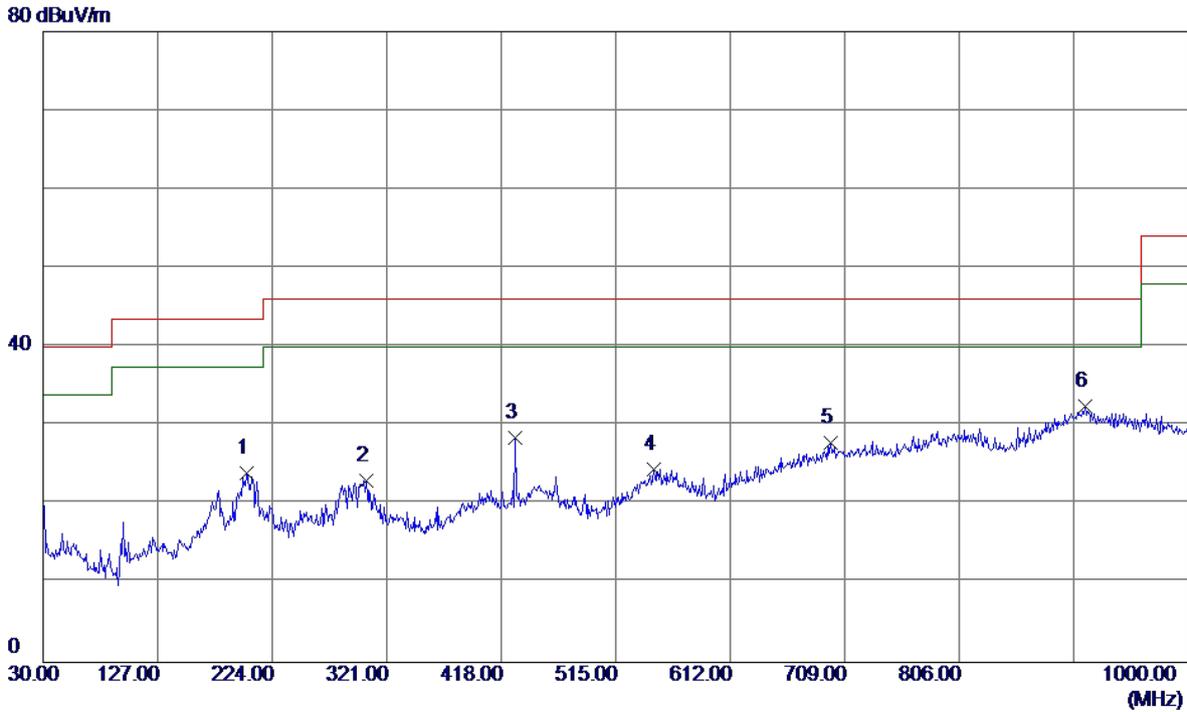

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	202.6600	38.47	-14.49	23.98	43.50	-19.52	Peak	
2	303.5400	33.35	-10.24	23.11	46.00	-22.89	Peak	
3	429.6400	36.41	-7.91	28.50	46.00	-17.50	Peak	
4	547.0100	29.38	-4.85	24.53	46.00	-21.47	Peak	
5	697.3600	30.12	-2.21	27.91	46.00	-18.09	Peak	
6 *	912.7000	29.88	2.59	32.47	46.00	-13.53	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz (Adapter:HUNTKEY)


**Vertical**

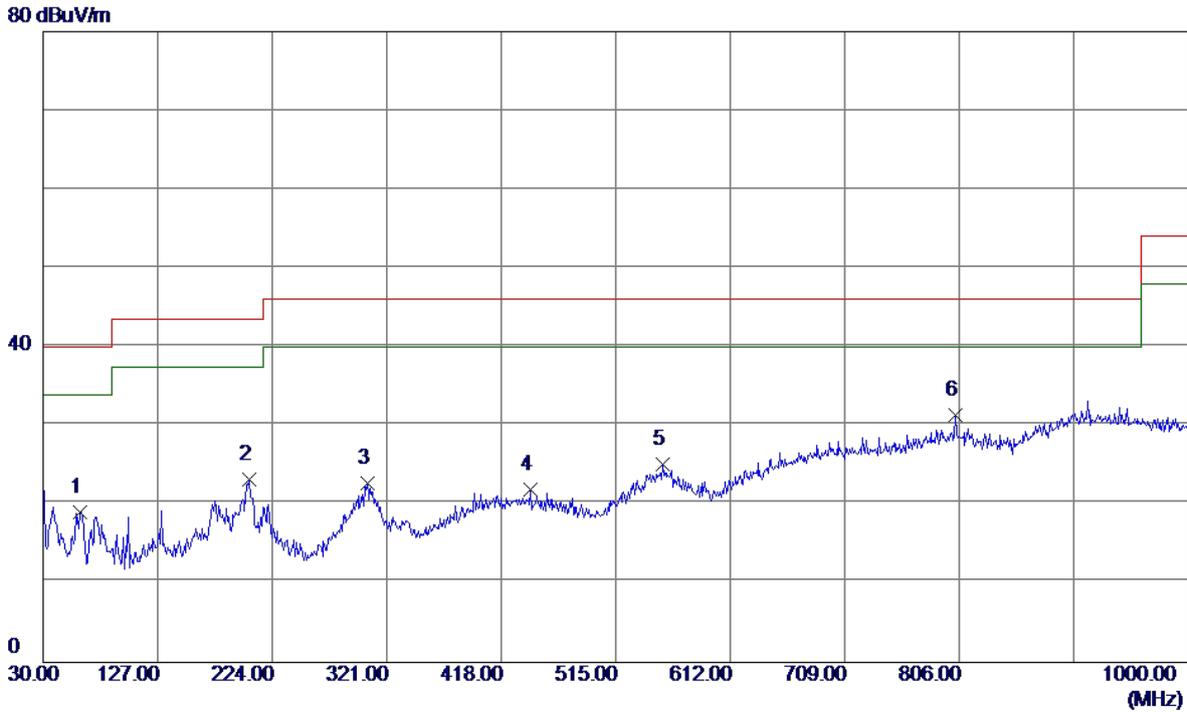

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	61.0400	33.12	-14.02	19.10	40.00	-20.90	Peak	
2	204.6000	37.76	-14.53	23.23	43.50	-20.27	Peak	
3	304.5100	33.05	-10.26	22.79	46.00	-23.21	Peak	
4	443.2200	29.82	-7.97	21.85	46.00	-24.15	Peak	
5	554.7700	29.92	-4.78	25.14	46.00	-20.86	Peak	
6 *	803.0900	31.12	0.17	31.29	46.00	-14.71	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz (Adapter:HUNTKEY)


**Horizontal**

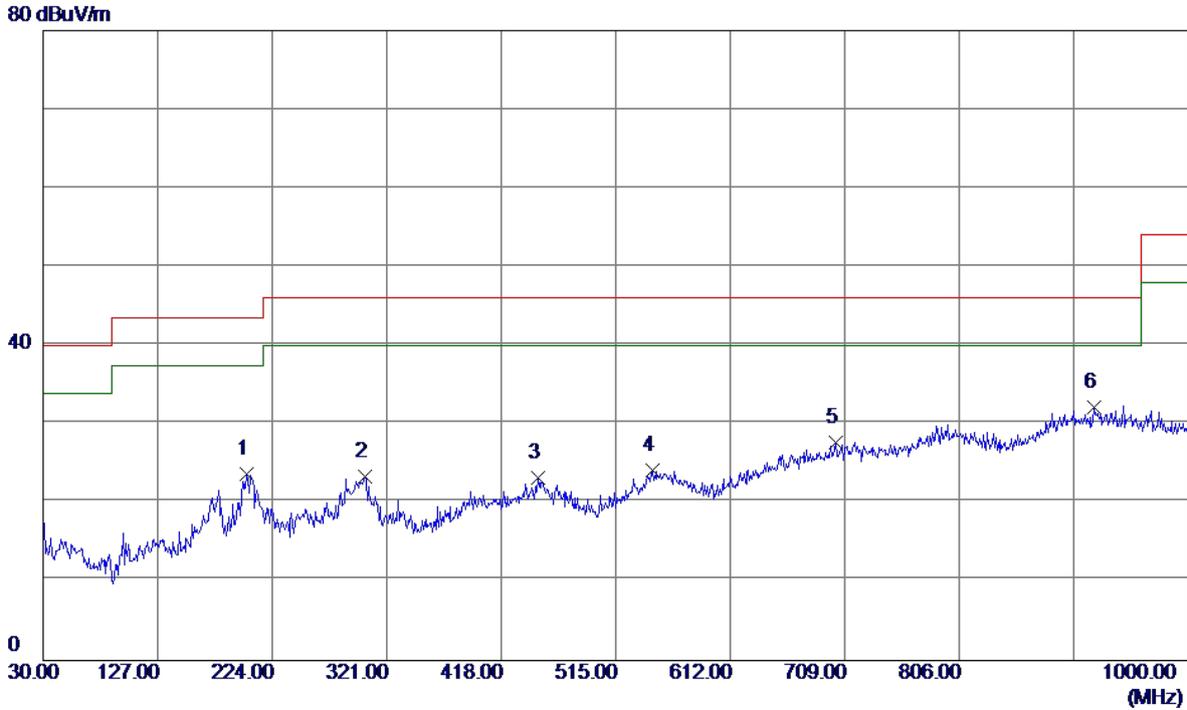

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	202.6600	38.13	-14.49	23.64	43.50	-19.86	Peak	
2	302.5700	33.64	-10.21	23.43	46.00	-22.57	Peak	
3	449.0400	31.13	-8.00	23.13	46.00	-22.87	Peak	
4	546.0400	29.15	-4.95	24.20	46.00	-21.80	Peak	
5	701.2400	29.81	-2.10	27.71	46.00	-18.29	Peak	
6 *	920.4600	29.53	2.56	32.09	46.00	-13.91	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz (Adapter:HUNTKEY)


**Vertical**

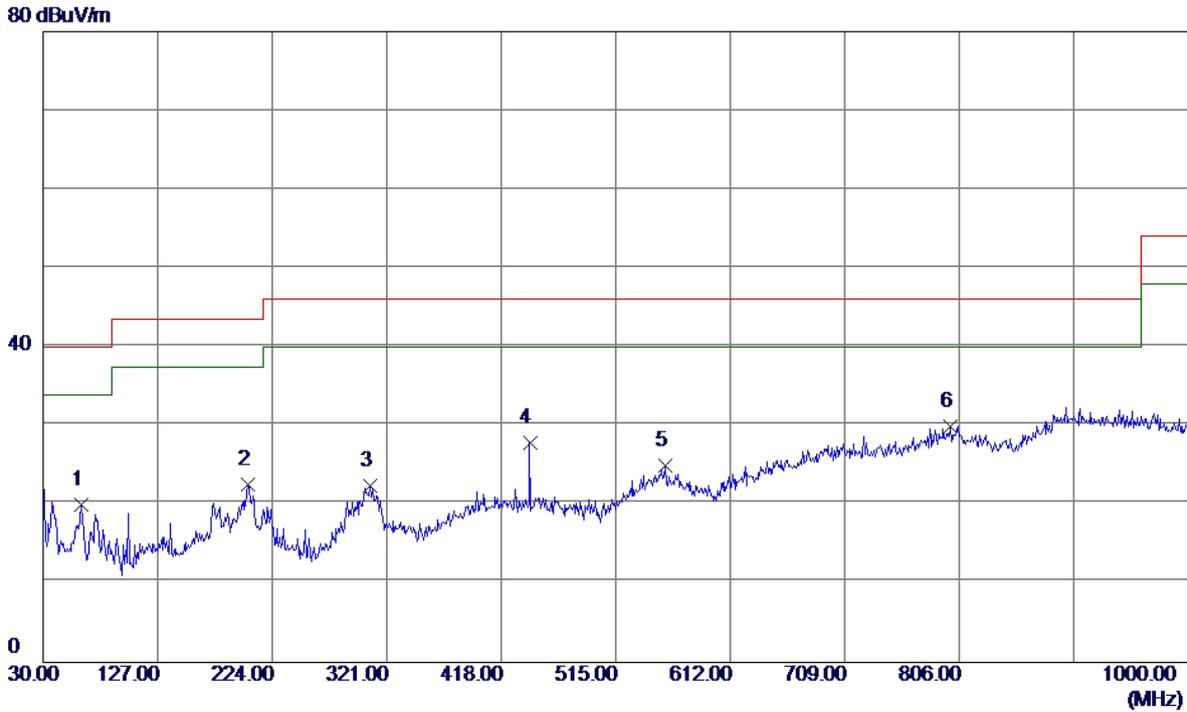

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	62.0100	34.27	-14.30	19.97	40.00	-20.03	Peak	
2	203.6300	37.06	-14.51	22.55	43.50	-20.95	Peak	
3	307.4200	32.73	-10.32	22.41	46.00	-23.59	Peak	
4	442.2500	35.79	-7.97	27.82	46.00	-18.18	Peak	
5	556.7100	29.80	-4.88	24.92	46.00	-21.08	Peak	
6 *	798.2400	29.73	0.18	29.91	46.00	-16.09	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz (Adapter:HUNTKEY)


**Horizontal**

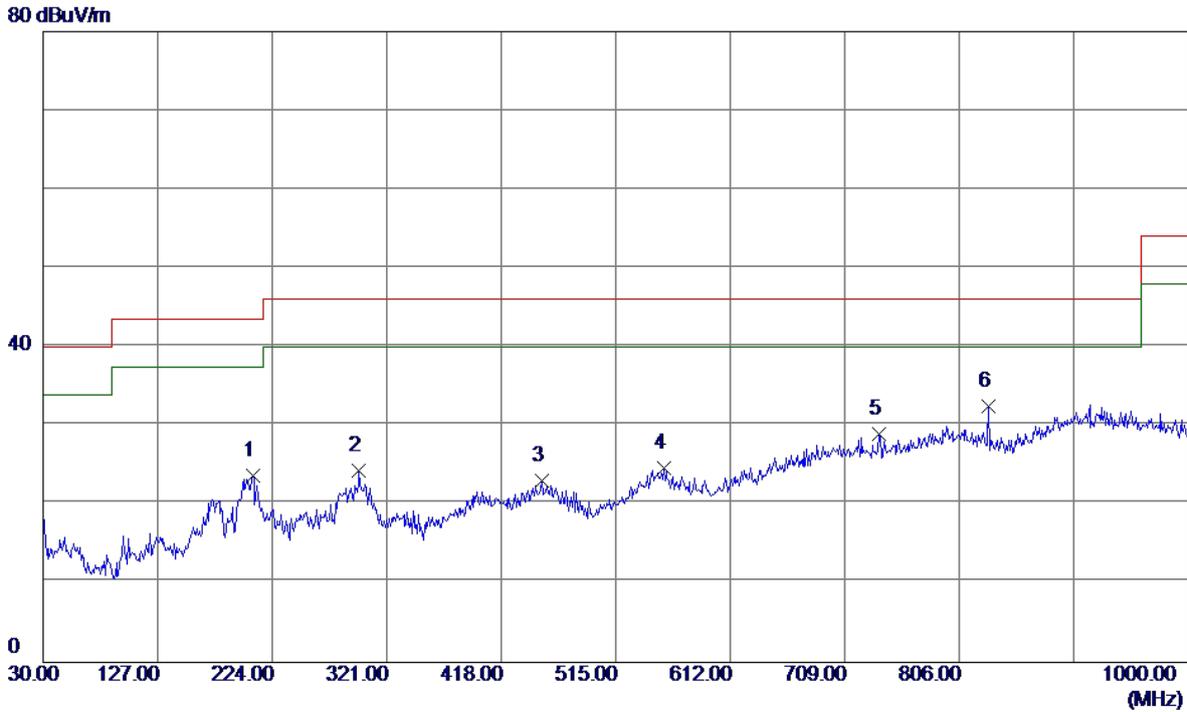

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	207.5100	38.34	-14.59	23.75	43.50	-19.75	Peak	
2	297.7200	34.70	-10.41	24.29	46.00	-21.71	Peak	
3	452.9200	31.08	-8.10	22.98	46.00	-23.02	Peak	
4	555.7400	29.47	-4.83	24.64	46.00	-21.36	Peak	
5	738.1000	31.00	-2.00	29.00	46.00	-17.00	Peak	
6 *	831.2199	33.23	-0.68	32.55	46.00	-13.45	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz (Adapter:HUNTKEY)


**Vertical**

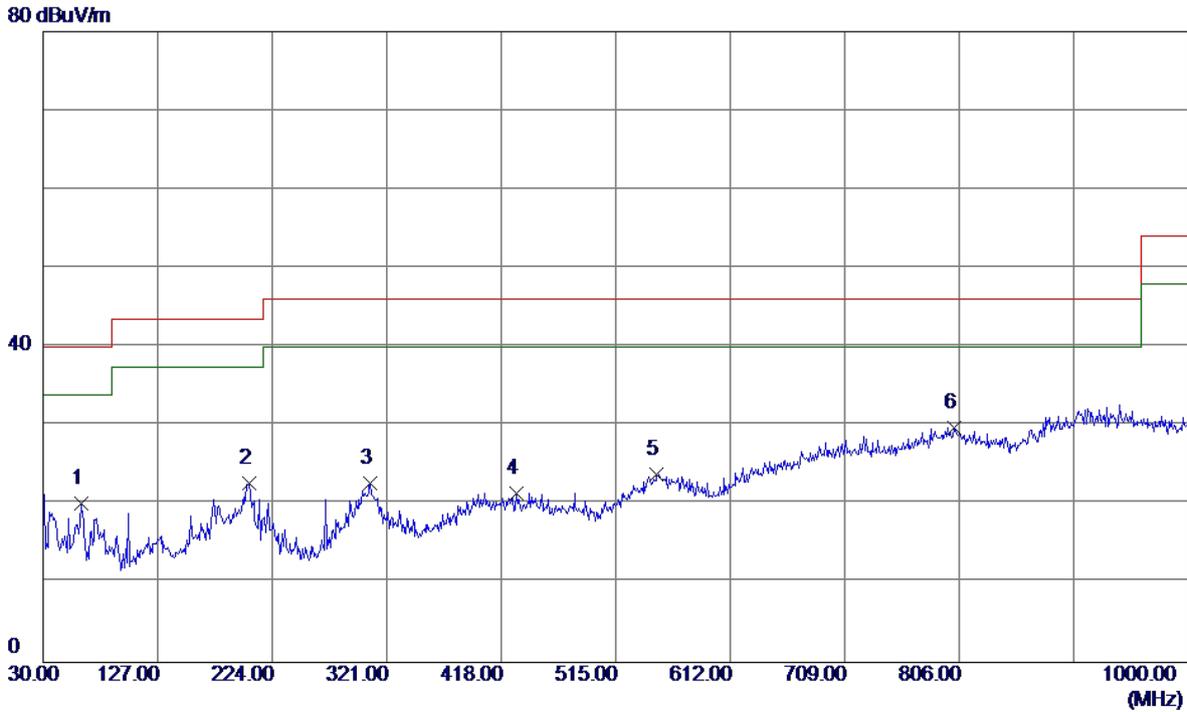

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	62.0100	34.43	-14.30	20.13	40.00	-19.87	Peak	
2	204.6000	37.30	-14.53	22.77	43.50	-20.73	Peak	
3	307.4200	33.05	-10.32	22.73	46.00	-23.27	Peak	
4	430.6100	29.42	-7.91	21.51	46.00	-24.49	Peak	
5	549.9200	28.44	-4.55	23.89	46.00	-22.11	Peak	
6 *	802.1200	29.51	0.20	29.71	46.00	-16.29	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz (Adapter:HUNTKEY)


**Horizontal**

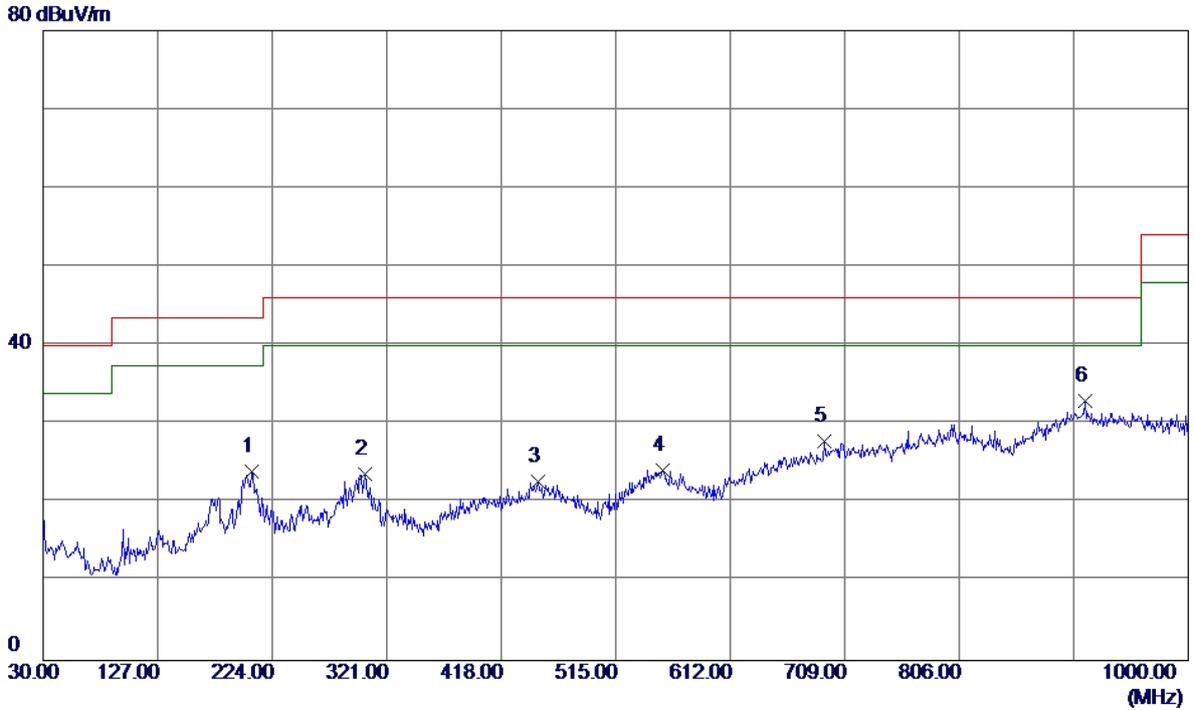

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	206.5399	38.54	-14.57	23.97	43.50	-19.53	Peak	
2	302.5700	33.84	-10.21	23.63	46.00	-22.37	Peak	
3	449.0400	30.66	-8.00	22.66	46.00	-23.34	Peak	
4	554.7700	29.01	-4.78	24.23	46.00	-21.77	Peak	
5	691.5400	30.36	-2.45	27.91	46.00	-18.09	Peak	
6 *	912.7000	30.33	2.59	32.92	46.00	-13.08	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter:HUNTKEY)


Vertical

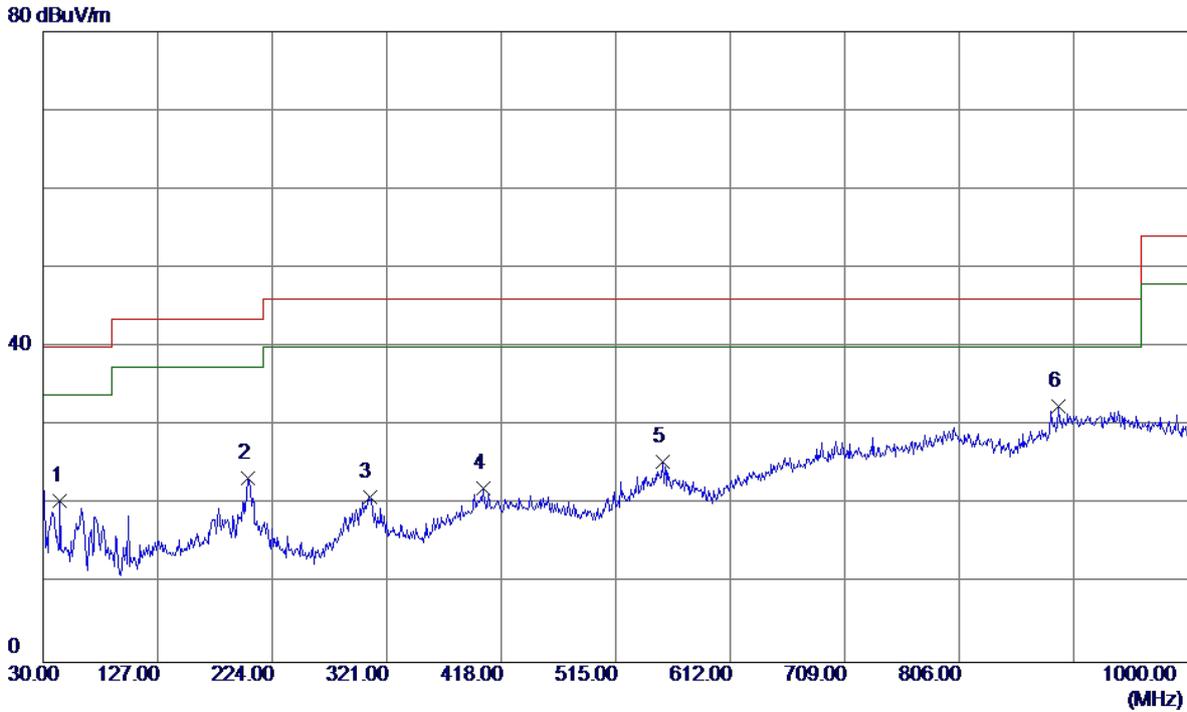

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	44.5500	33.42	-12.90	20.52	40.00	-19.48	Peak	
2	203.6300	37.85	-14.51	23.34	43.50	-20.16	Peak	
3	306.4500	31.25	-10.30	20.95	46.00	-25.05	Peak	
4	402.4800	29.85	-7.79	22.06	46.00	-23.94	Peak	
5	554.7700	30.25	-4.78	25.47	46.00	-20.53	Peak	
6 *	890.3900	30.61	1.89	32.50	46.00	-13.50	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter:HUNTKEY)


**Horizontal**

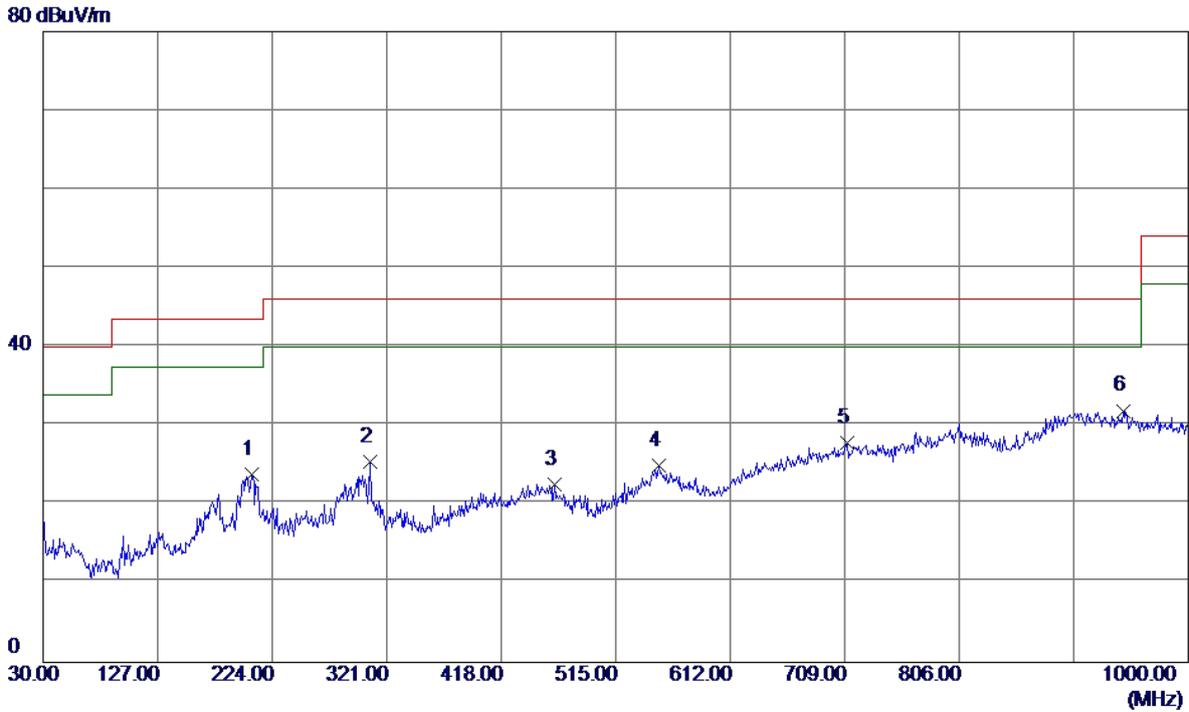

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	206.5399	38.35	-14.57	23.78	43.50	-19.72	Peak	
2	307.4200	35.78	-10.32	25.46	46.00	-20.54	Peak	
3	463.5900	31.05	-8.47	22.58	46.00	-23.42	Peak	
4	551.8600	29.59	-4.63	24.96	46.00	-21.04	Peak	
5	710.9400	29.96	-2.07	27.89	46.00	-18.11	Peak	
6 *	944.7100	29.46	2.46	31.92	46.00	-14.08	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz (Adapter:Salcomp)


**Vertical**

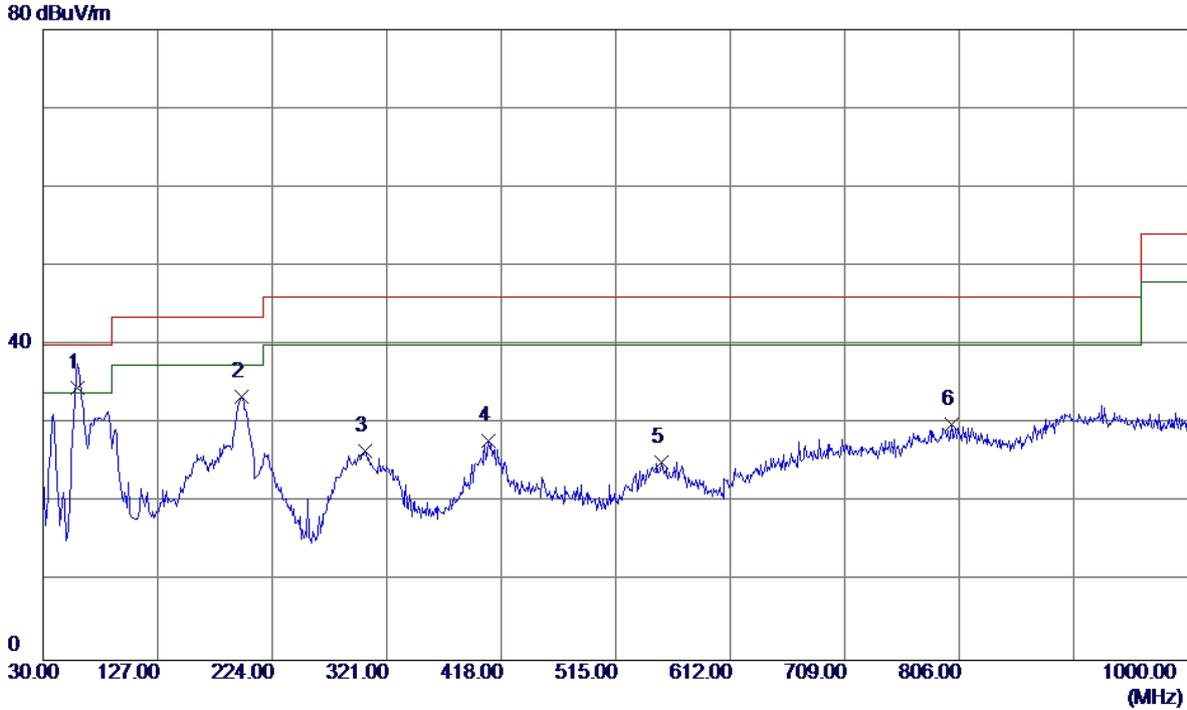

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	59.1000	48.33	-13.77	34.56	40.00	-5.44	QP	
2	197.8100	47.70	-14.32	33.38	43.50	-10.12	Peak	
3	302.5700	36.72	-10.21	26.51	46.00	-19.49	Peak	
4	407.3299	35.66	-7.81	27.85	46.00	-18.15	Peak	
5	553.8000	29.90	-4.73	25.17	46.00	-20.83	Peak	
6	799.2100	29.70	0.22	29.92	46.00	-16.08	Peak	


Test Mode: UNII-1/TX A Mode 5180MHz (Adapter:Salcomp)

**Horizontal**

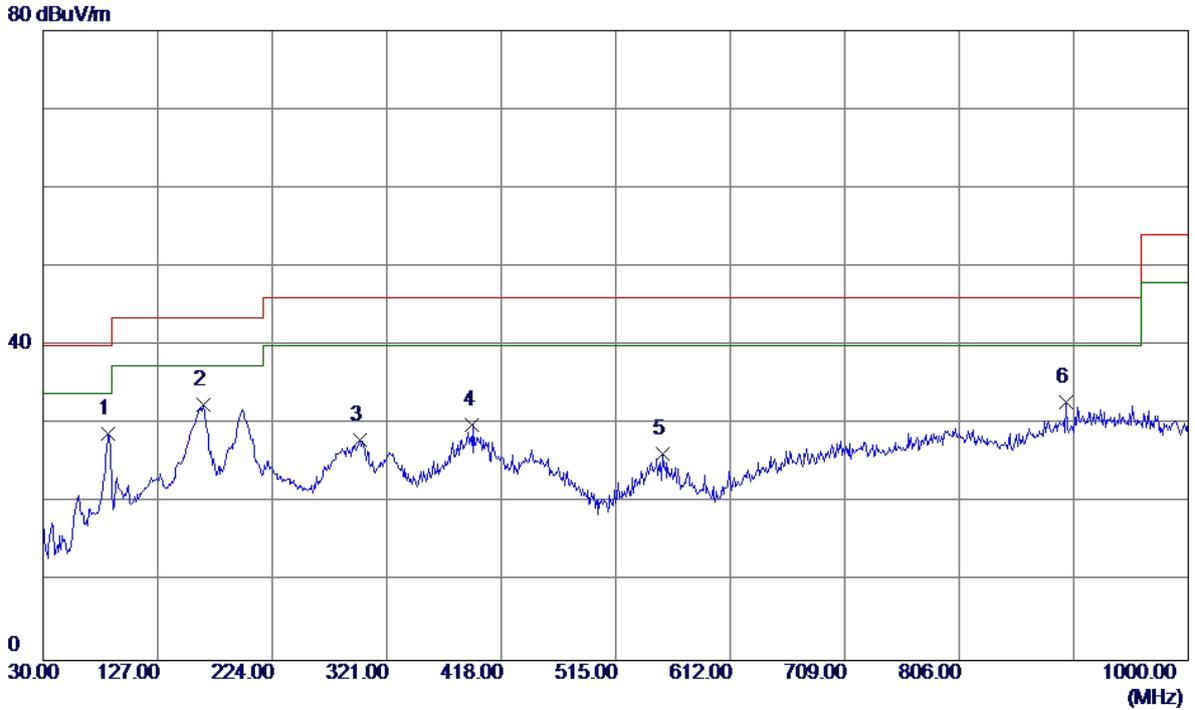

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	85.2900	46.15	-17.40	28.75	40.00	-11.25	Peak	
2 *	165.8000	44.68	-12.20	32.48	43.50	-11.02	Peak	
3	298.6900	38.27	-10.30	27.97	46.00	-18.03	Peak	
4	393.7500	38.18	-8.21	29.97	46.00	-16.03	Peak	
5	554.7700	31.08	-4.78	26.30	46.00	-19.70	Peak	
6	896.2100	30.38	2.35	32.73	46.00	-13.27	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz (Adapter:Salcomp)

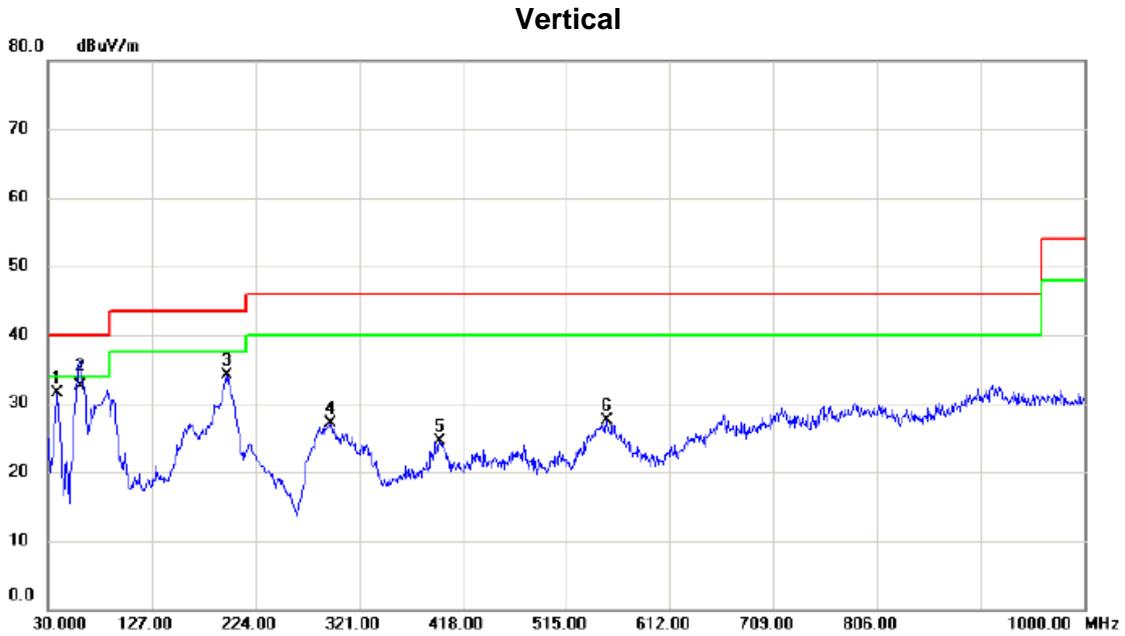

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		38.730	45.50	-14.06	31.44	40.00	-8.56	peak	
2	*	60.070	46.24	-13.74	32.50	40.00	-7.50	QP	
3		197.810	48.42	-14.32	34.10	43.50	-9.40	peak	
4		294.810	37.87	-10.72	27.15	46.00	-18.85	peak	
5		396.660	32.47	-8.00	24.47	46.00	-21.53	peak	
6		552.830	32.20	-4.68	27.52	46.00	-18.48	peak	


Test Mode: UNII-1/TX A Mode 5240MHz (Adapter:Salcomp)

**Horizontal**



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		86.260	45.49	-17.42	28.07	40.00	-11.93	peak	
2	*	165.800	45.22	-12.21	33.01	43.50	-10.49	peak	
3		198.780	46.68	-14.37	32.31	43.50	-11.19	peak	
4		279.290	42.25	-12.13	30.12	46.00	-15.88	peak	
5		393.750	40.16	-8.21	31.95	46.00	-14.05	peak	
6		552.830	31.72	-4.68	27.04	46.00	-18.96	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz (Adapter:Salcomp)

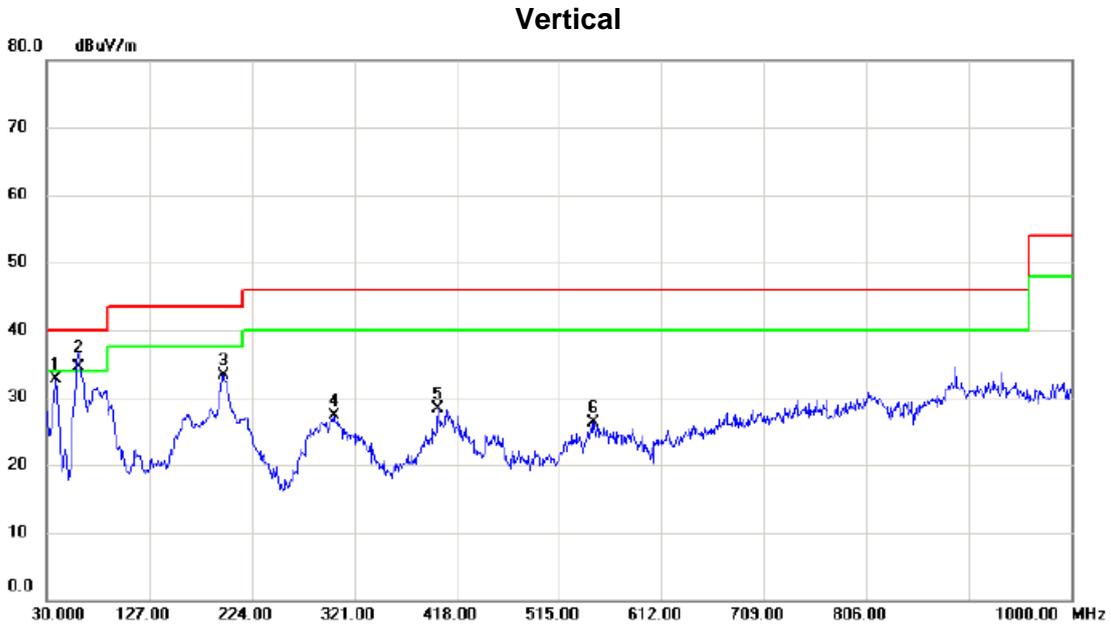

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		38.730	46.69	-14.06	32.63	40.00	-7.37	peak	
2	*	60.070	48.27	-13.74	34.53	40.00	-5.47	QP	
3		196.840	47.55	-14.27	33.28	43.50	-10.22	peak	
4		301.600	37.43	-10.19	27.24	46.00	-18.76	peak	
5		400.540	36.01	-7.78	28.23	46.00	-17.77	peak	
6		547.980	31.08	-4.75	26.33	46.00	-19.67	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz (Adapter:Salcomp)


**Horizontal**



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	86.260	45.88	-17.42	28.46	40.00	-11.54	peak	
2		160.950	43.39	-12.16	31.23	43.50	-12.27	peak	
3		199.750	45.30	-14.41	30.89	43.50	-12.61	peak	
4		299.660	38.52	-10.19	28.33	46.00	-17.67	peak	
5		397.630	38.39	-7.94	30.45	46.00	-15.55	peak	
6		549.920	30.72	-4.55	26.17	46.00	-19.83	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz (Adapter:Salcomp)


**Vertical**

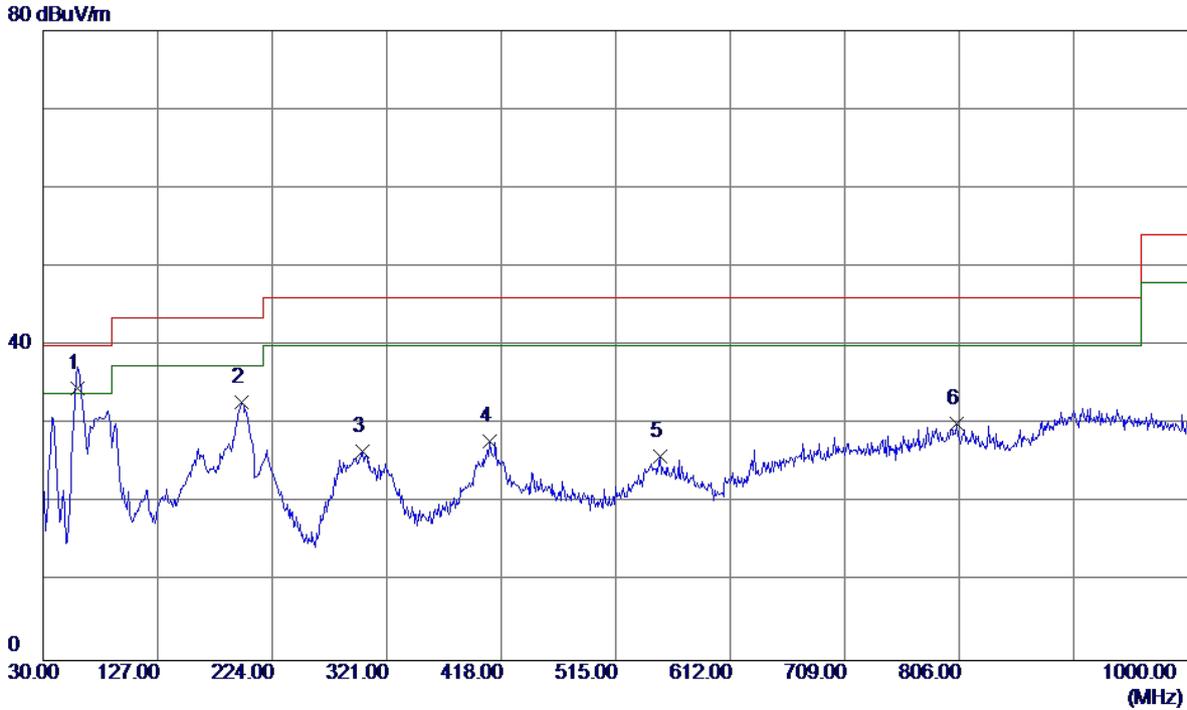

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	59.1000	48.32	-13.77	34.55	40.00	-5.45	QP	
2	197.8100	47.17	-14.32	32.85	43.50	-10.65	Peak	
3	300.6300	36.72	-10.17	26.55	46.00	-19.45	Peak	
4	408.3000	35.63	-7.82	27.81	46.00	-18.19	Peak	
5	552.8300	30.54	-4.68	25.86	46.00	-20.14	Peak	
6	804.0600	29.97	0.14	30.11	46.00	-15.89	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz (Adapter:Salcomp)


**Horizontal**

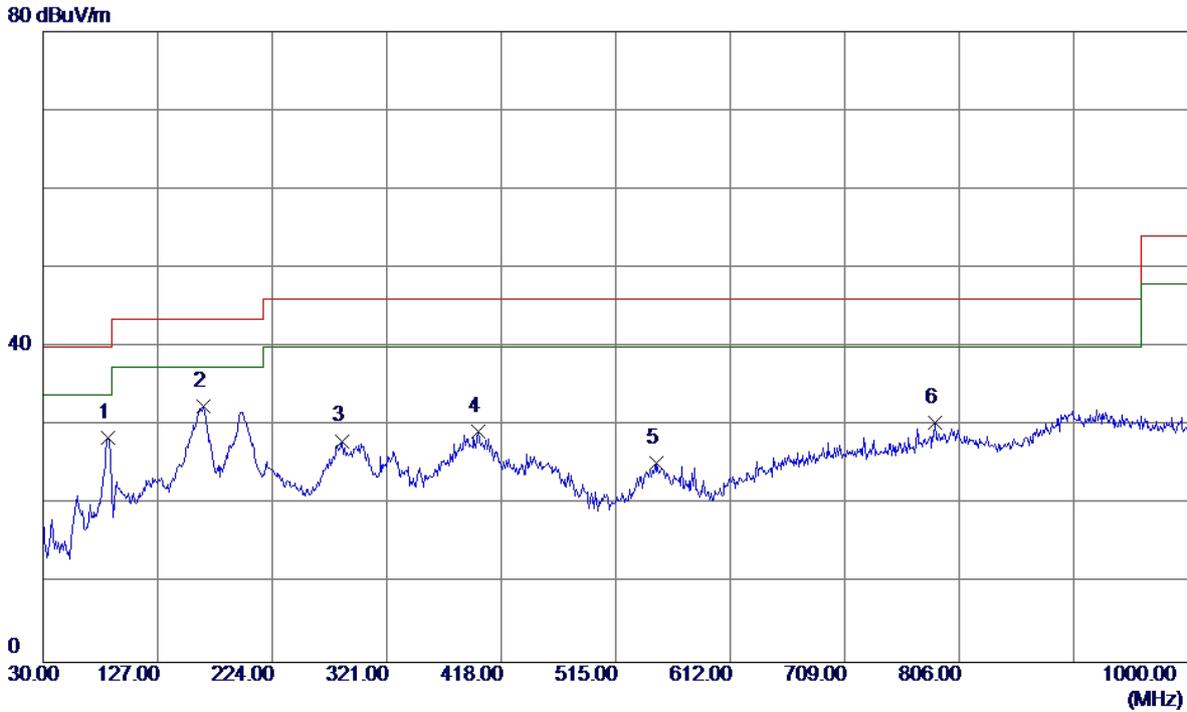

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	85.2900	45.82	-17.40	28.42	40.00	-11.58	Peak	
2 *	165.8000	44.75	-12.20	32.55	43.50	-10.95	Peak	
3	283.1700	39.86	-11.78	28.08	46.00	-17.92	Peak	
4	398.6000	37.12	-7.88	29.24	46.00	-16.76	Peak	
5	549.9200	29.88	-4.55	25.33	46.00	-20.67	Peak	
6	785.6300	30.85	-0.38	30.47	46.00	-15.53	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz (Adapter:Salcomp)


**Vertical**

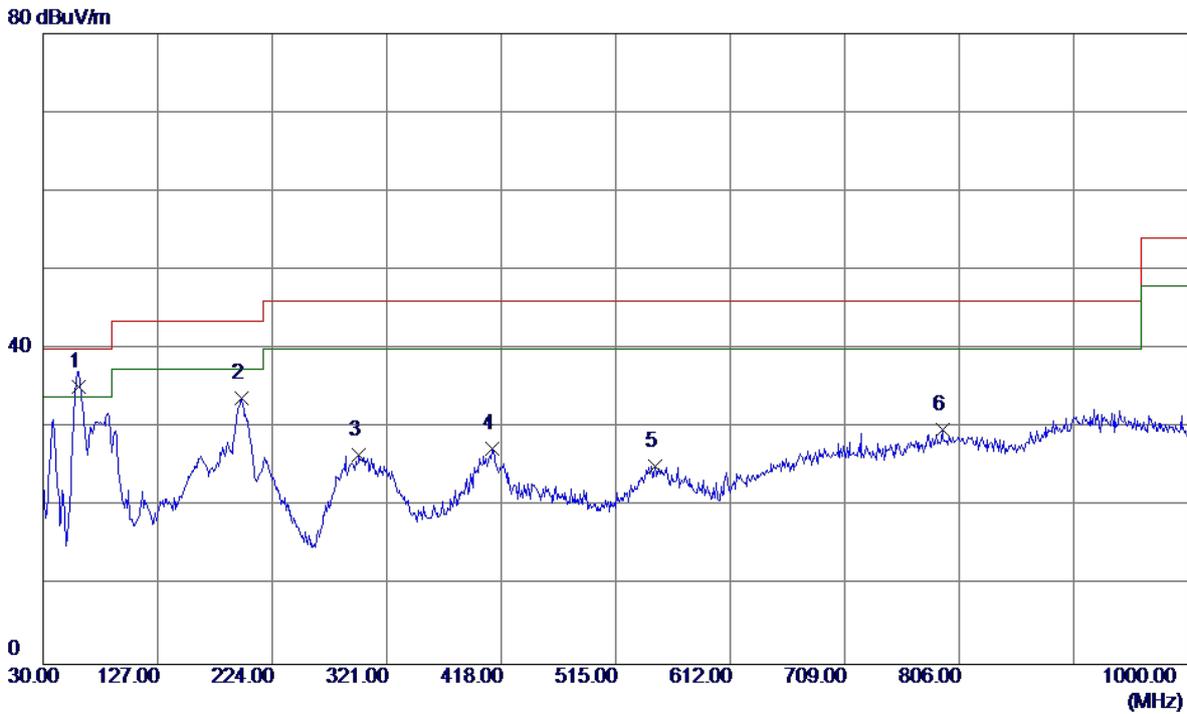

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	60.0700	48.89	-13.74	35.15	40.00	-4.85	QP	
2	197.8100	48.01	-14.32	33.69	43.50	-9.81	Peak	
3	297.7200	36.92	-10.41	26.51	46.00	-19.49	Peak	
4	410.2400	35.22	-7.83	27.39	46.00	-18.61	Peak	
5	547.9800	29.91	-4.75	25.16	46.00	-20.84	Peak	
6	791.4500	29.82	-0.12	29.70	46.00	-16.30	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz (Adapter:Salcomp)


**Horizontal**

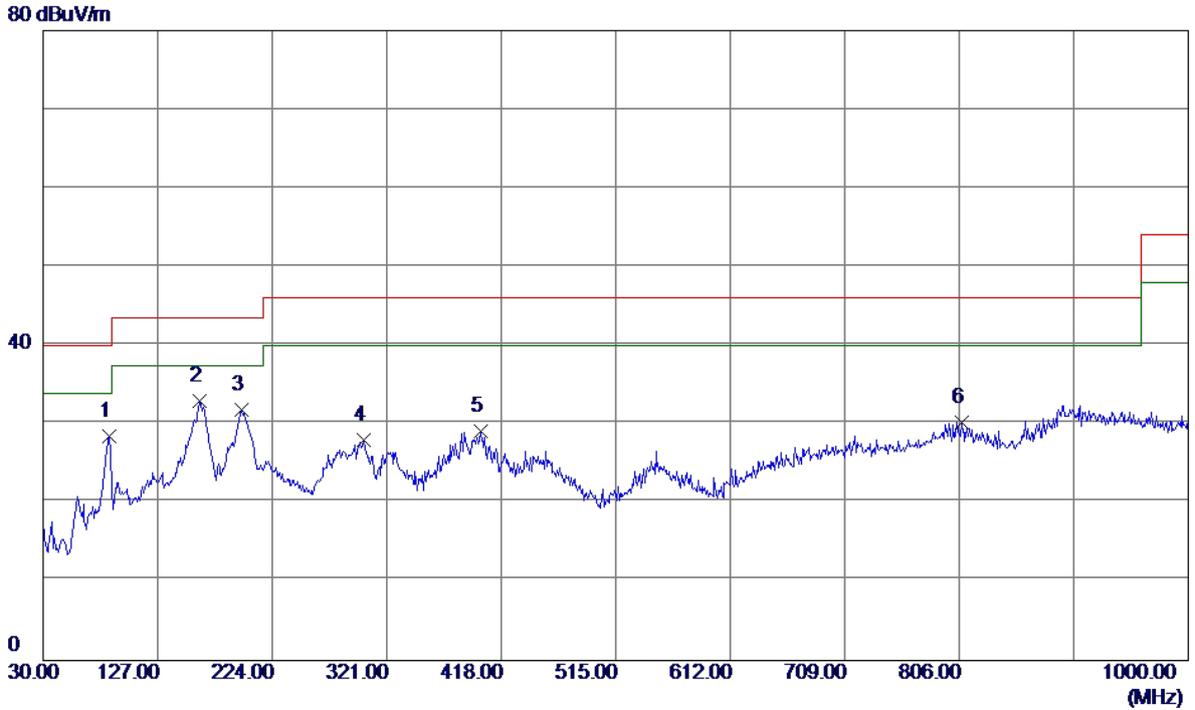

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	86.2600	45.90	-17.41	28.49	40.00	-11.51	Peak	
2 *	162.8900	45.19	-12.17	33.02	43.50	-10.48	Peak	
3	197.8100	46.14	-14.32	31.82	43.50	-11.68	Peak	
4	301.6000	38.16	-10.19	27.97	46.00	-18.03	Peak	
5	400.5400	36.87	-7.78	29.09	46.00	-16.91	Peak	
6	807.9400	30.24	0.02	30.26	46.00	-15.74	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz (Adapter:Salcomp)


**Vertical**

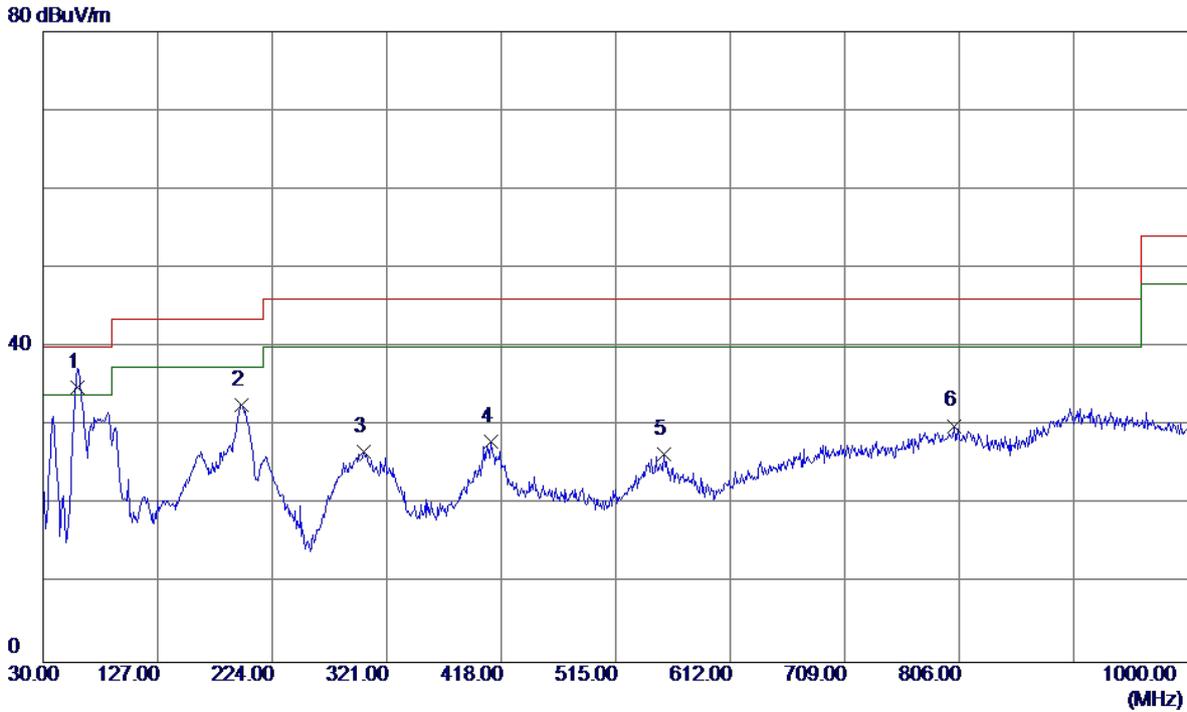

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	59.1000	48.65	-13.77	34.88	40.00	-5.12	QP	
2	197.8100	47.03	-14.32	32.71	43.50	-10.79	Peak	
3	301.6000	36.86	-10.19	26.67	46.00	-19.33	Peak	
4	409.2700	35.77	-7.82	27.95	46.00	-18.05	Peak	
5	555.7400	31.19	-4.83	26.36	46.00	-19.64	Peak	
6	802.1200	29.80	0.20	30.00	46.00	-16.00	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz (Adapter:Salcomp)


**Horizontal**

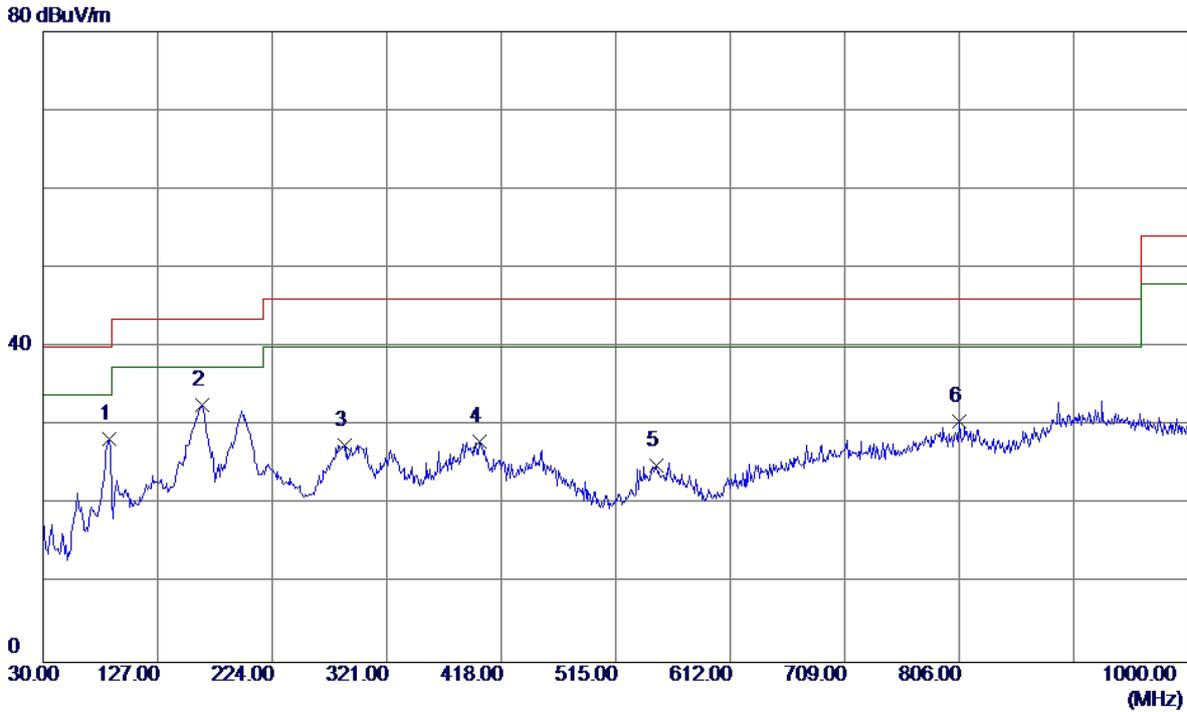

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	86.2600	45.72	-17.41	28.31	40.00	-11.69	Peak	
2 *	164.8300	44.76	-12.19	32.57	43.50	-10.93	Peak	
3	285.1099	39.13	-11.63	27.50	46.00	-18.50	Peak	
4	399.5700	35.79	-7.81	27.98	46.00	-18.02	Peak	
5	549.9200	29.58	-4.55	25.03	46.00	-20.97	Peak	
6	806.0000	30.41	0.08	30.49	46.00	-15.51	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz (Adapter:Salcomp)


**Vertical**

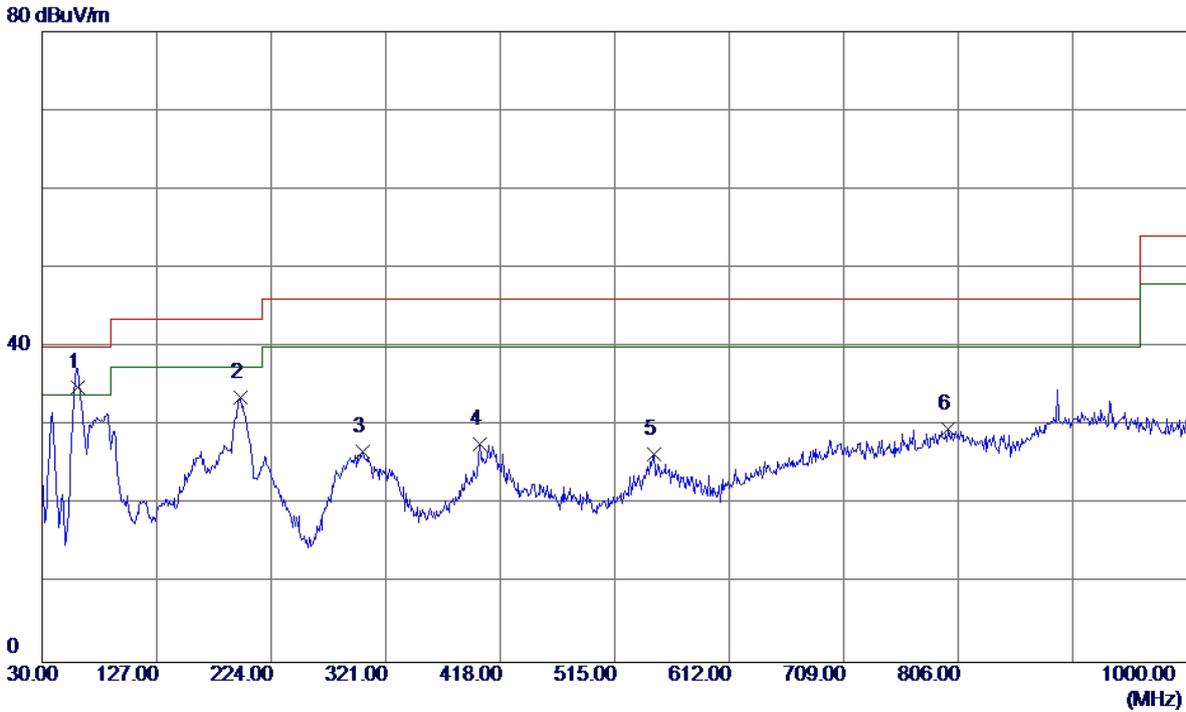

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	60.0700	48.67	-13.74	34.93	40.00	-5.07	QP	
2	197.8100	47.95	-14.32	33.63	43.50	-9.87	Peak	
3	301.6000	36.93	-10.19	26.74	46.00	-19.26	Peak	
4	400.5400	35.51	-7.78	27.73	46.00	-18.27	Peak	
5	547.9800	31.08	-4.75	26.33	46.00	-19.67	Peak	
6	797.2700	29.49	0.14	29.63	46.00	-16.37	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz (Adapter:Salcomp)


**Horizontal**

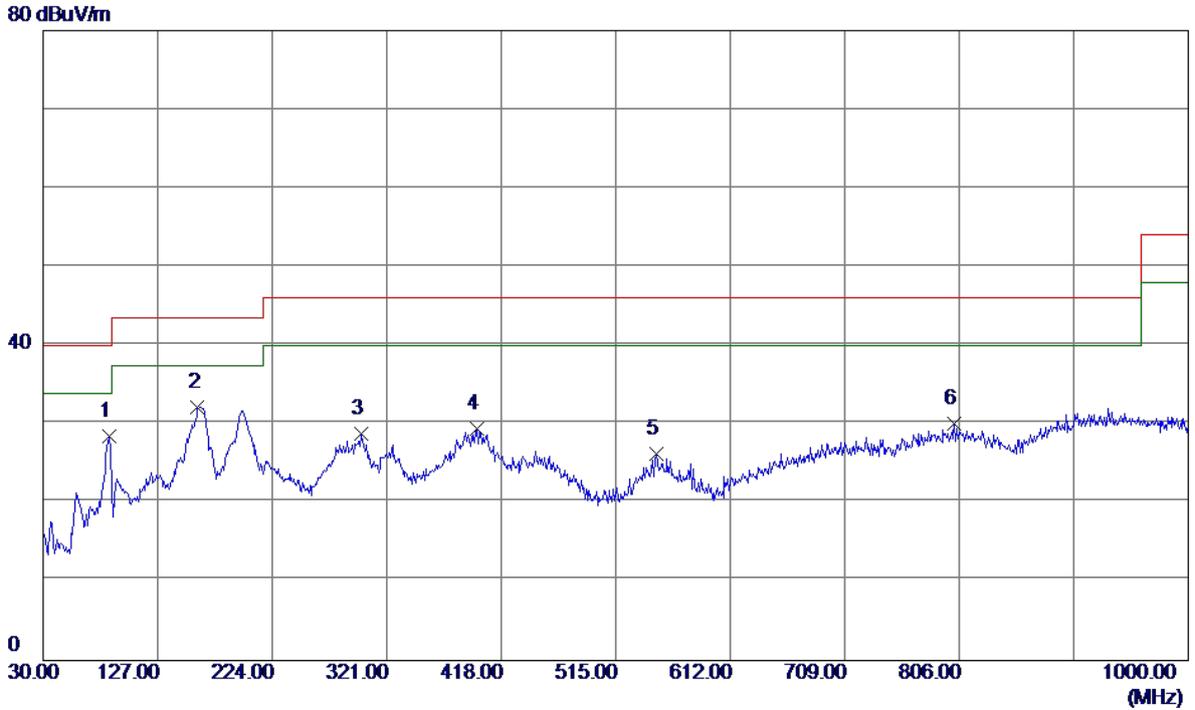

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	86.2600	45.87	-17.41	28.46	40.00	-11.54	Peak	
2 *	160.9500	44.39	-12.16	32.23	43.50	-11.27	Peak	
3	299.6600	39.03	-10.20	28.83	46.00	-17.17	Peak	
4	397.6300	37.39	-7.94	29.45	46.00	-16.55	Peak	
5	549.9200	30.72	-4.55	26.17	46.00	-19.83	Peak	
6	802.1200	29.82	0.20	30.02	46.00	-15.98	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter:Salcomp)


Vertical

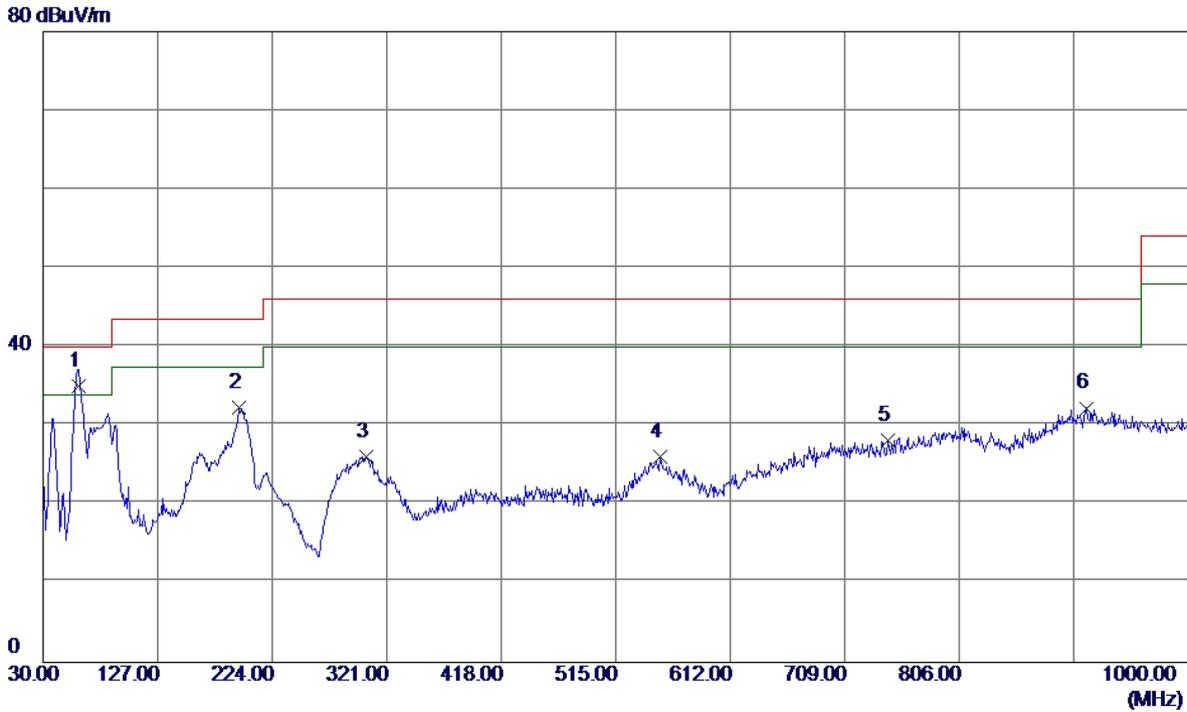

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	60.0700	48.75	-13.74	35.01	40.00	-4.99	QP	
2	195.8700	46.51	-14.23	32.28	43.50	-11.22	Peak	
3	303.5400	36.31	-10.24	26.07	46.00	-19.93	Peak	
4	552.8300	30.70	-4.68	26.02	46.00	-19.98	Peak	
5	745.8600	30.11	-1.98	28.13	46.00	-17.87	Peak	
6	913.6700	29.65	2.59	32.24	46.00	-13.76	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter:Salcomp)

**Horizontal**

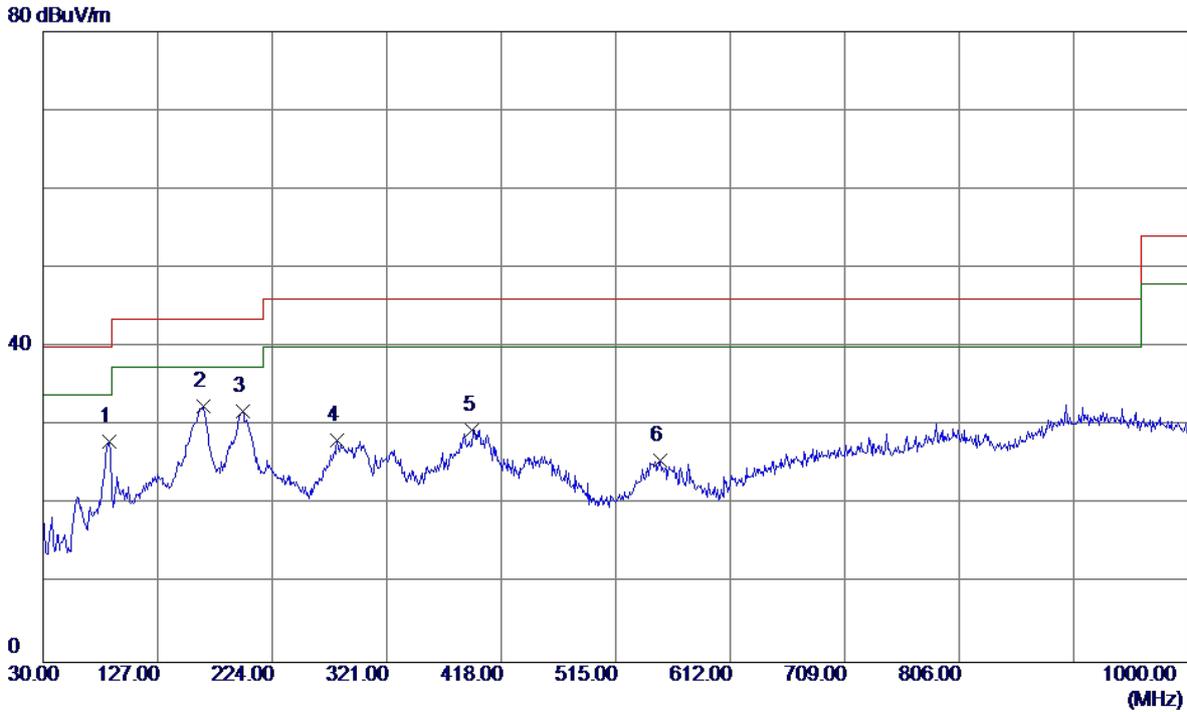


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	86.2600	45.48	-17.41	28.07	40.00	-11.93	Peak	
2 *	165.8000	44.71	-12.20	32.51	43.50	-10.99	Peak	
3	198.7800	46.18	-14.37	31.81	43.50	-11.69	Peak	
4	279.2900	40.25	-12.13	28.12	46.00	-17.88	Peak	
5	393.7500	37.66	-8.21	29.45	46.00	-16.55	Peak	
6	552.8300	30.22	-4.68	25.54	46.00	-20.46	Peak	

**ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)**

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

**Vertical**


125 dBuV/m

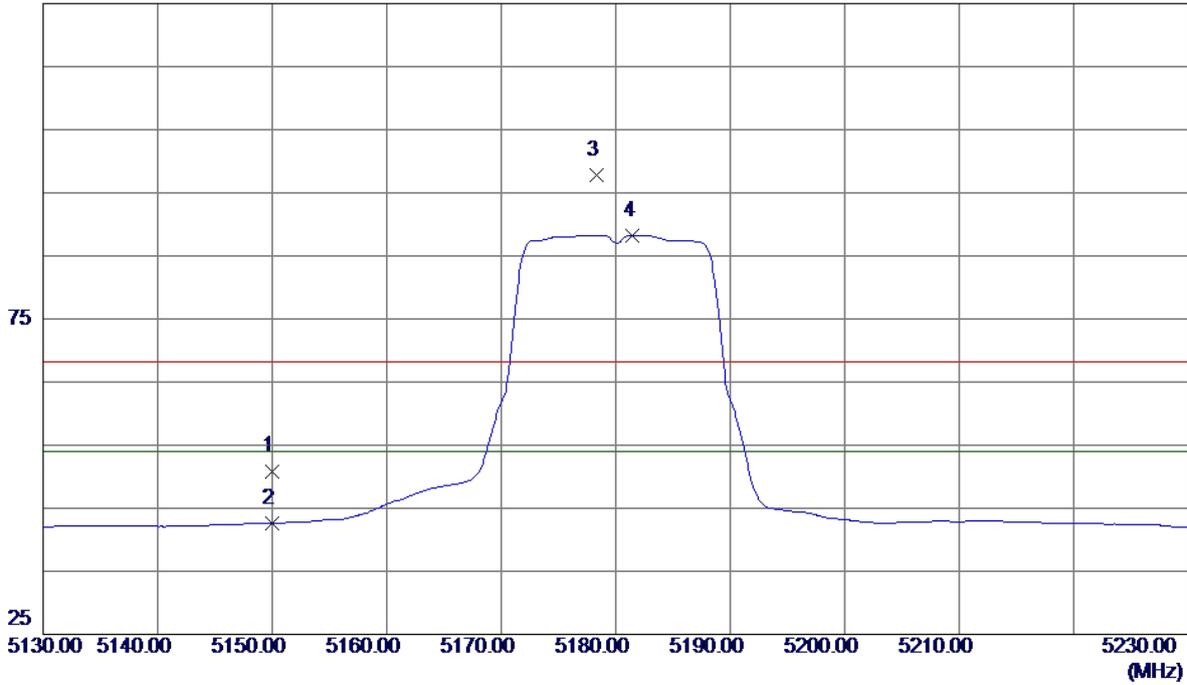

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	10.28	40.62	50.90	68.30	-17.40	Peak	
2	5150.0000	2.05	40.62	42.67	54.00	-11.33	AVG	
3	5178.3000	57.01	40.72	97.73	68.30	29.43	Peak	No Limit
4 *	5181.5000	47.52	40.73	88.25	54.00	34.25	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

**Vertical**

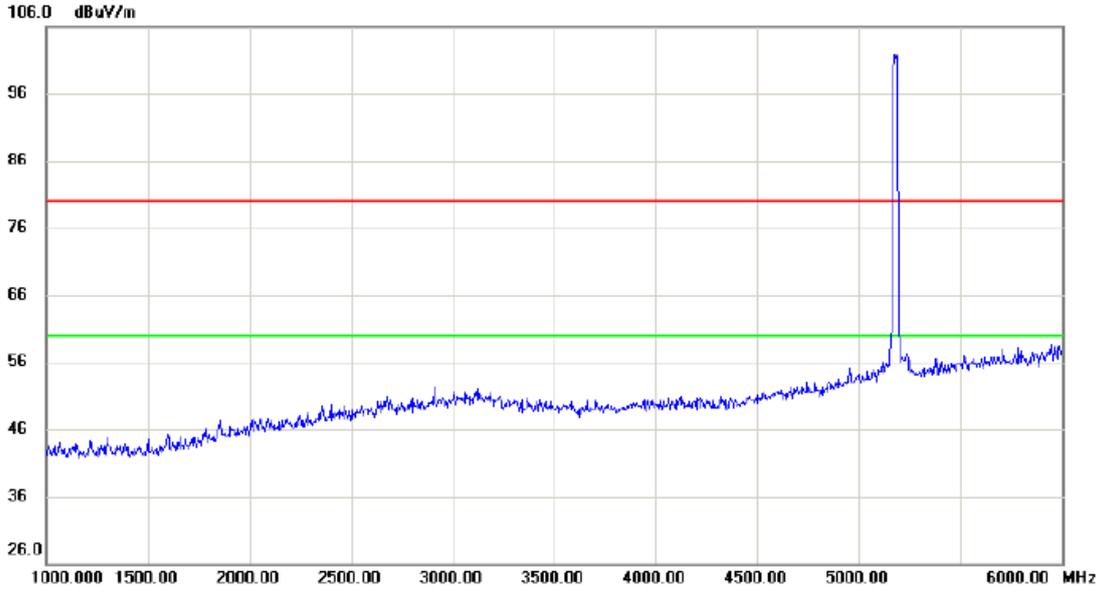


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

**Vertical**

100 dBuV/m

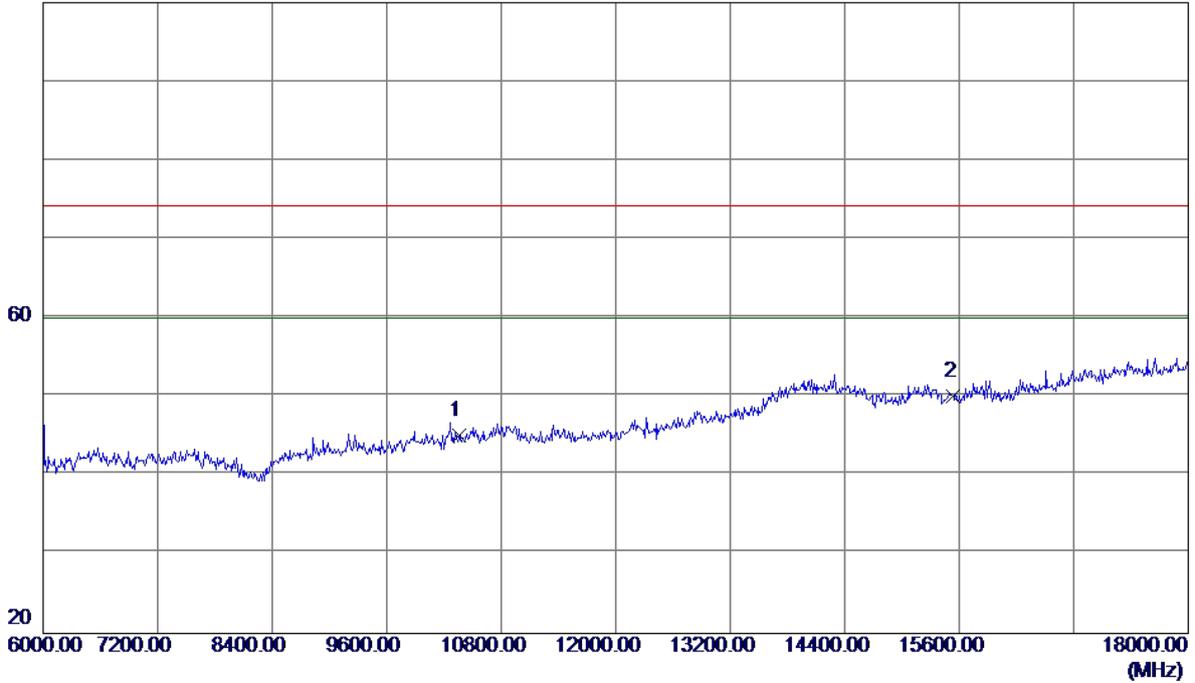


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.0000	29.82	15.23	45.05	74.20	-29.15	Peak	
2 *	15540.0000	31.15	18.87	50.02	74.20	-24.18	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

**Vertical**


100 dBuV/m

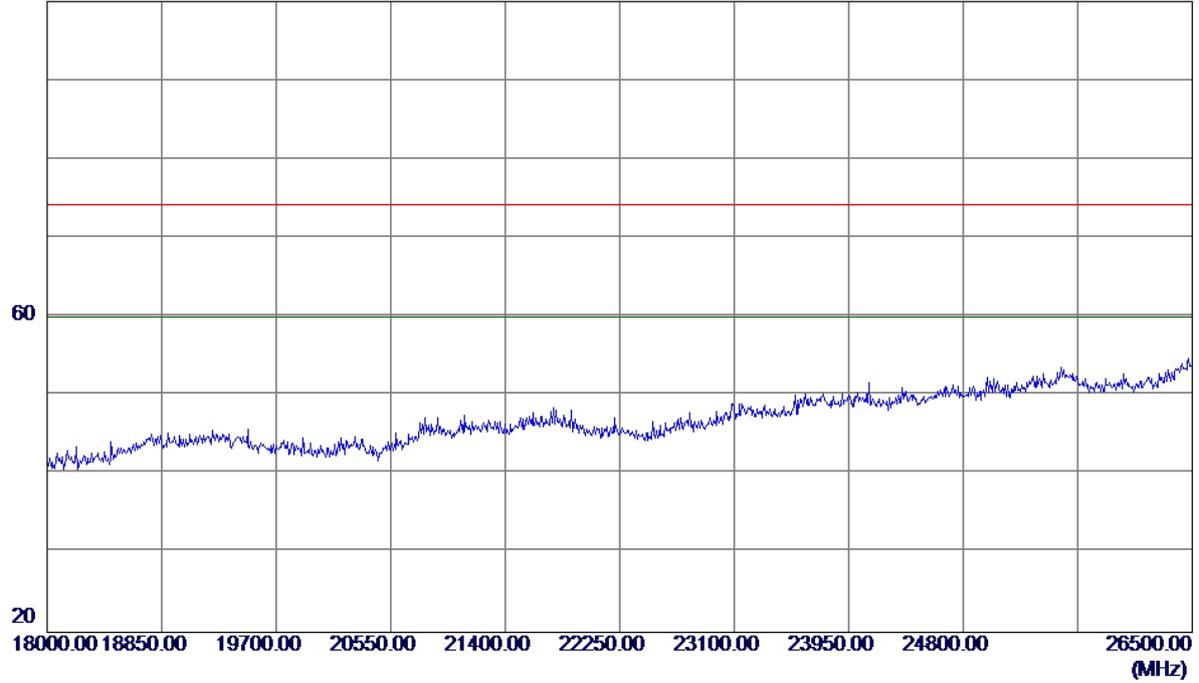

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

**Vertical**

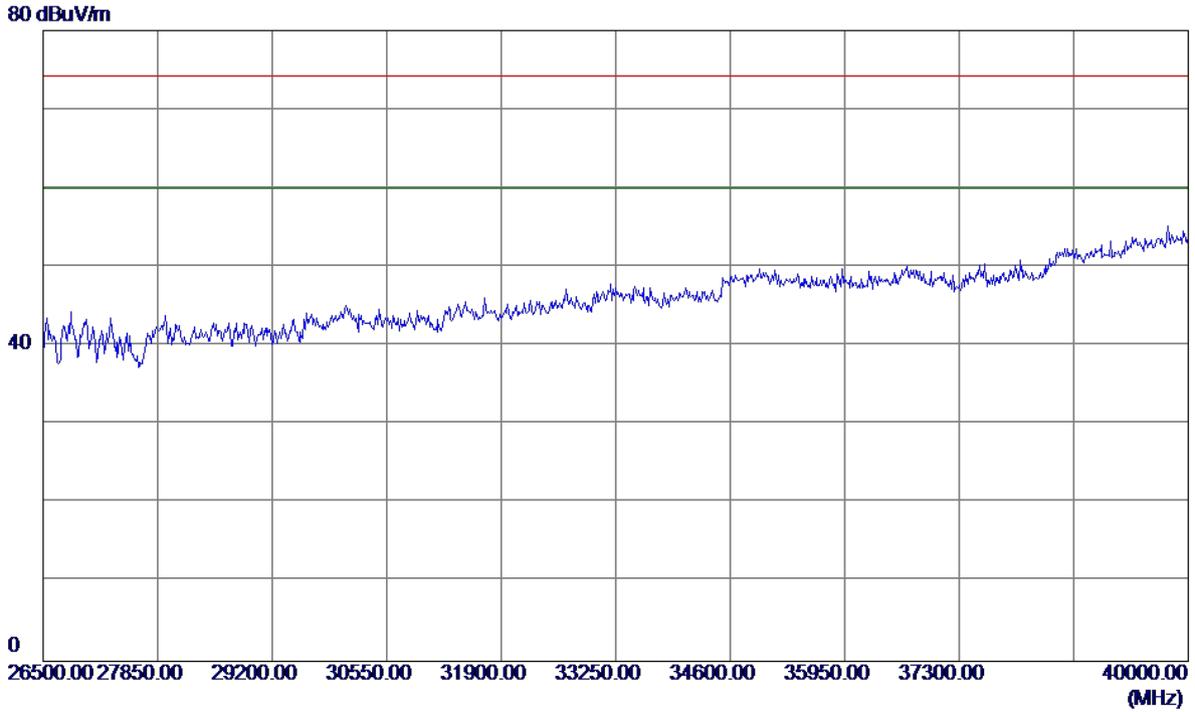


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

**Horizontal**


125 dBuV/m

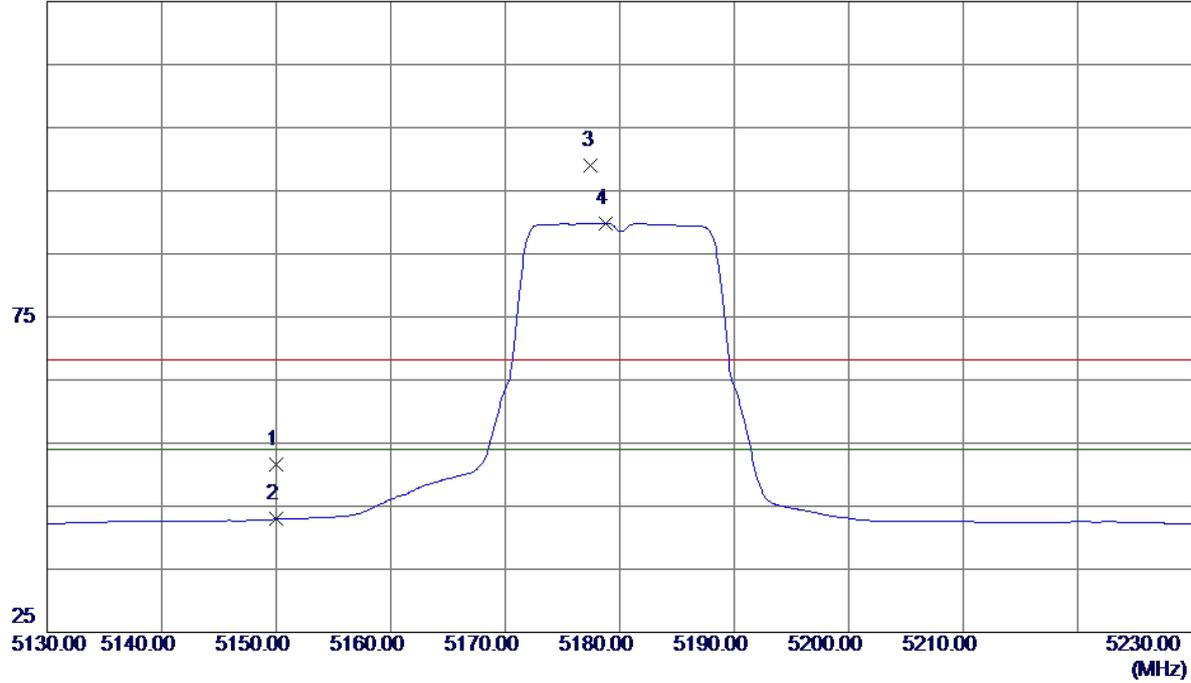

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	10.92	40.62	51.54	68.30	-16.76	Peak	
2	5150.0000	2.32	40.62	42.94	54.00	-11.06	AVG	
3	5177.5000	58.21	40.72	98.93	68.30	30.63	Peak	No Limit
4 *	5178.8000	49.13	40.72	89.85	54.00	35.85	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

**Horizontal**

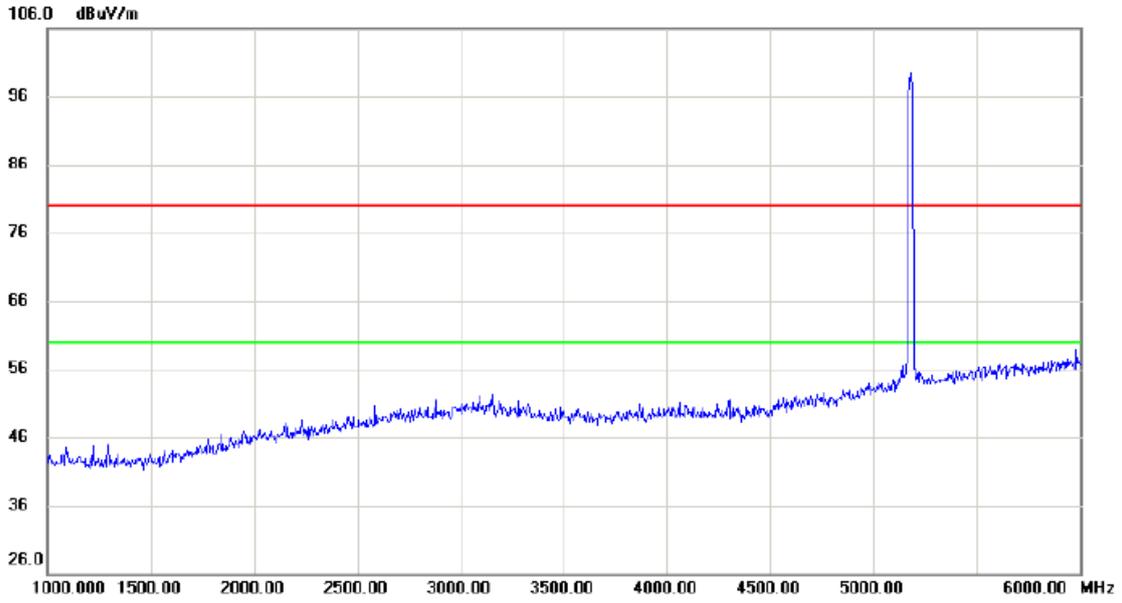


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

**Horizontal**

100 dBuV/m

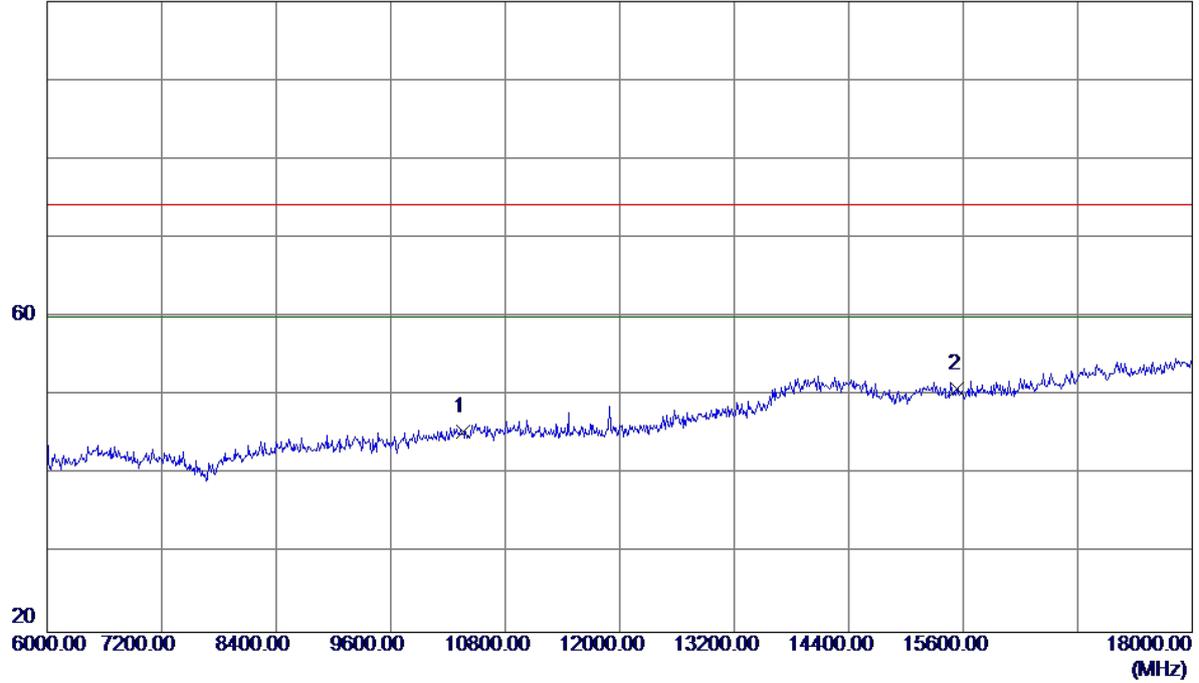


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.0000	30.18	15.23	45.41	74.20	-28.79	Peak	
2 *	15540.0000	32.06	18.87	50.93	74.20	-23.27	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

**Horizontal**


100 dBuV/m

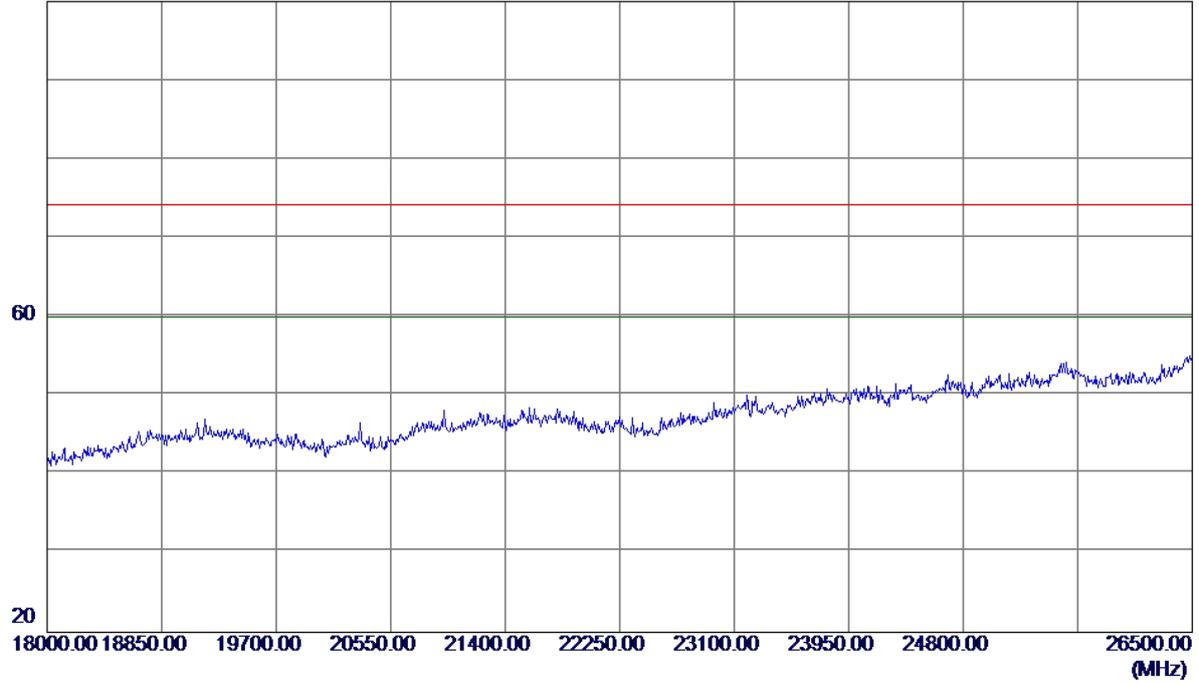

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

**Horizontal**

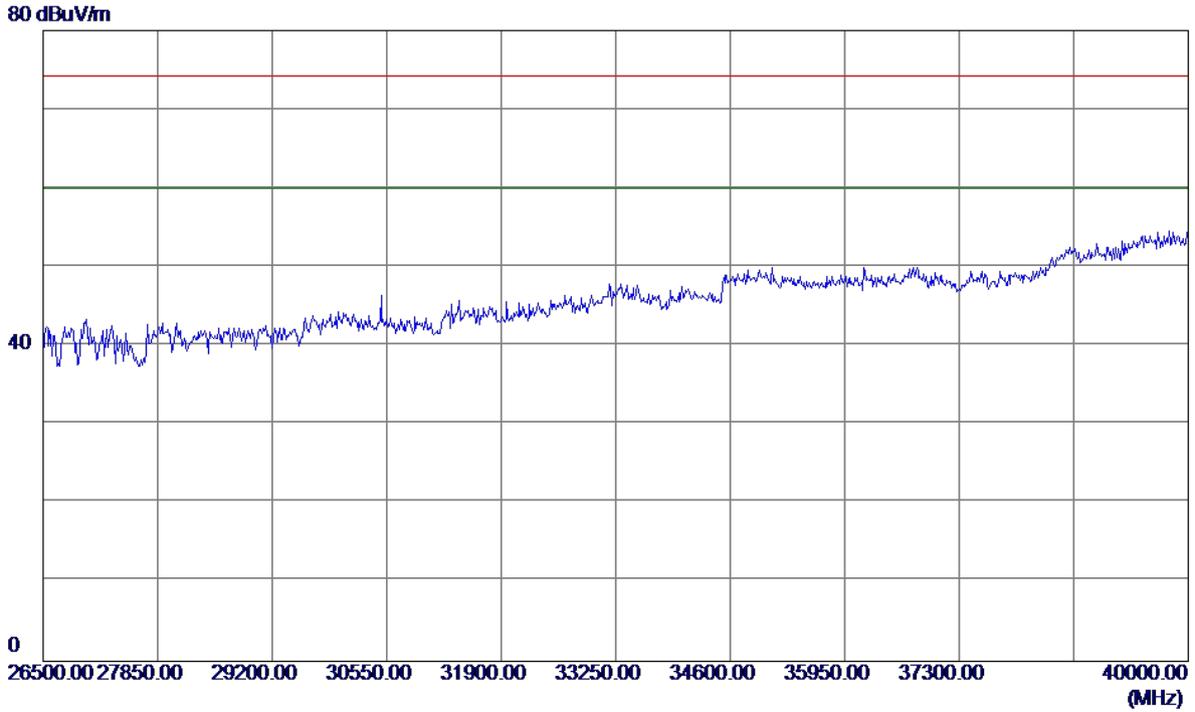


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

**Vertical**


125 dBuV/m

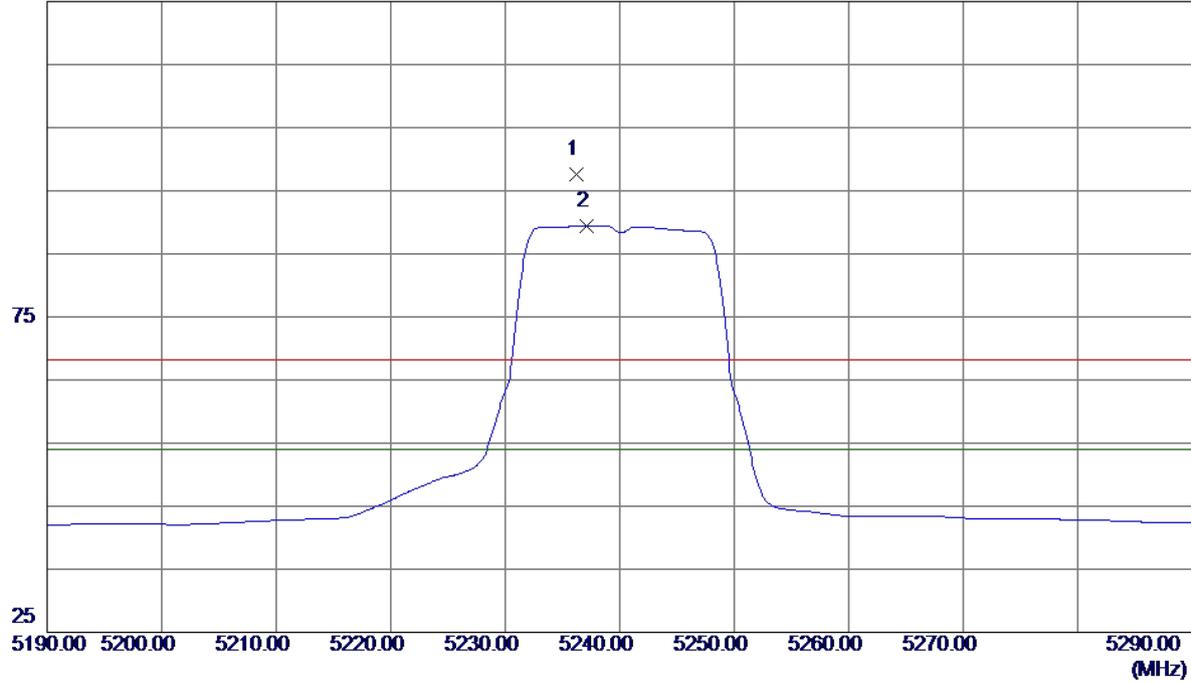

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5236.2000	56.61	40.91	97.52	68.30	29.22	Peak	No Limit
2 *	5237.1000	48.55	40.91	89.46	54.00	35.46	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

**Vertical**

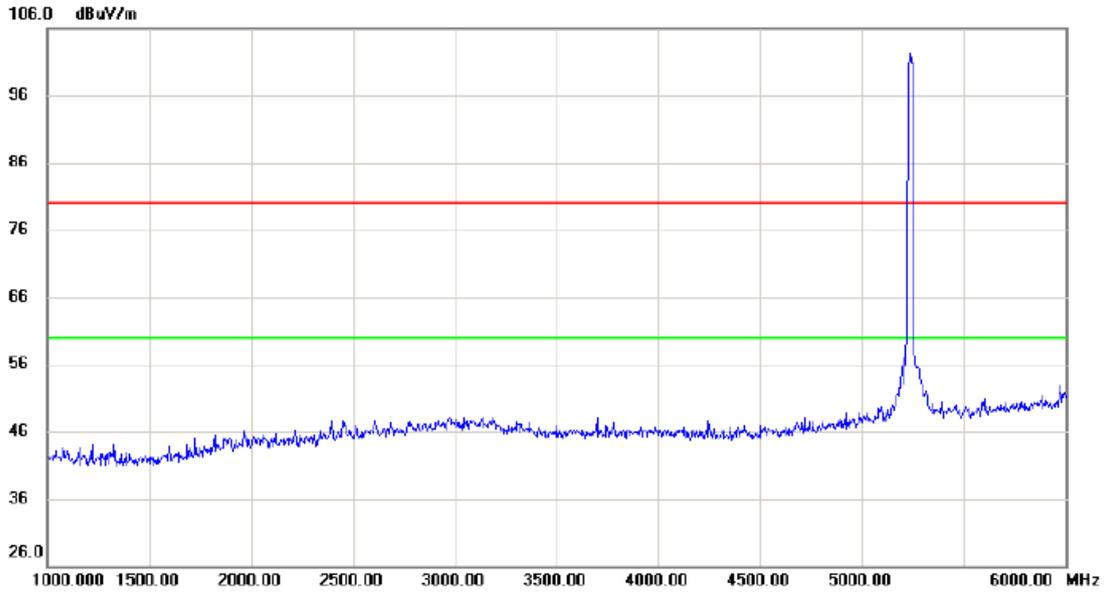


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
		5240	96		96	78	18		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

**Vertical**

100 dBuV/m

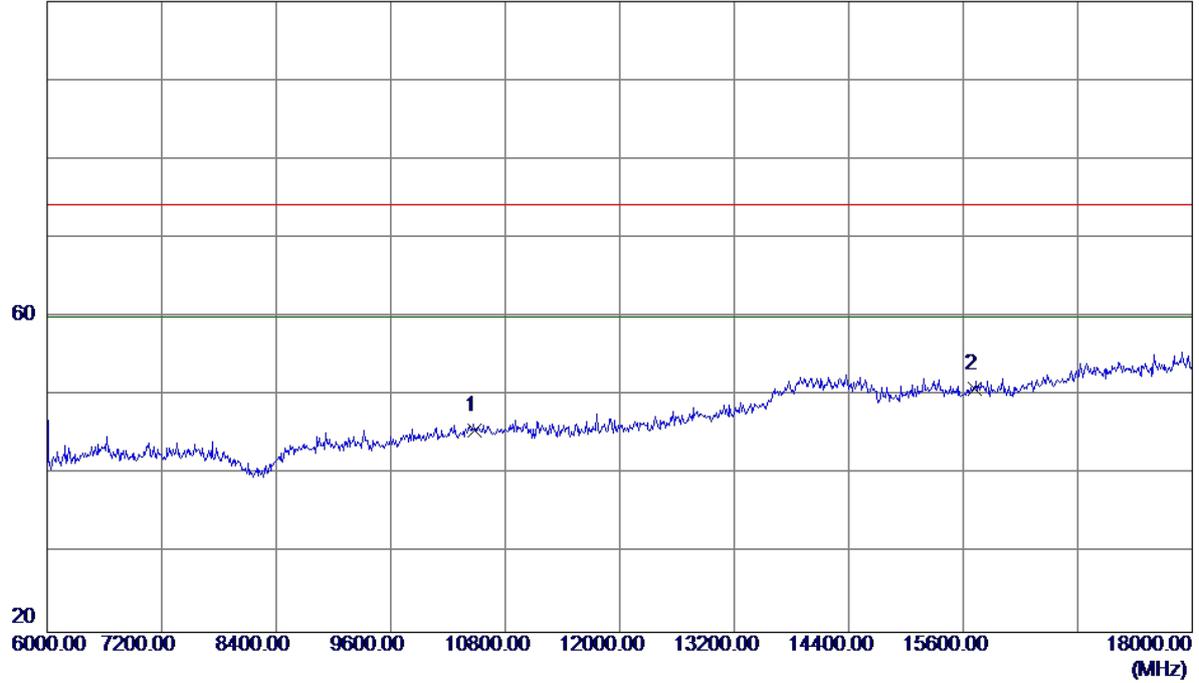


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.0000	30.04	15.54	45.58	74.20	-28.62	Peak	
2 *	15720.0000	32.03	18.88	50.91	74.20	-23.29	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

**Vertical**

100 dBuV/m

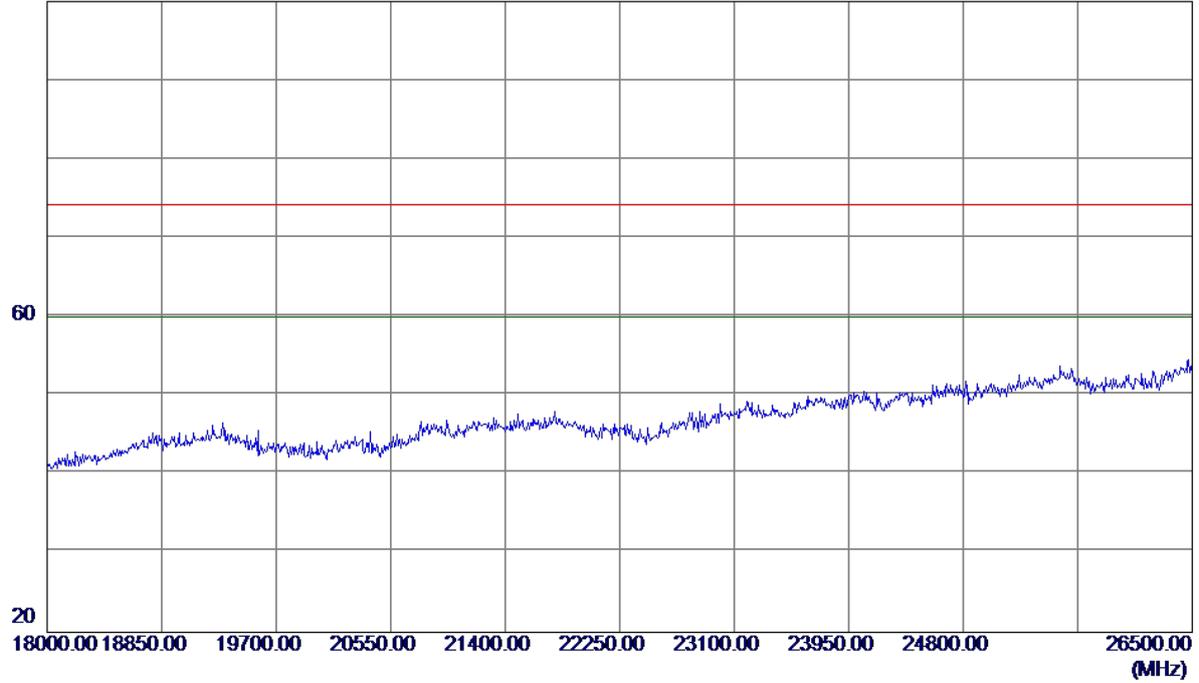


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment



Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

**Horizontal**


125 dBuV/m

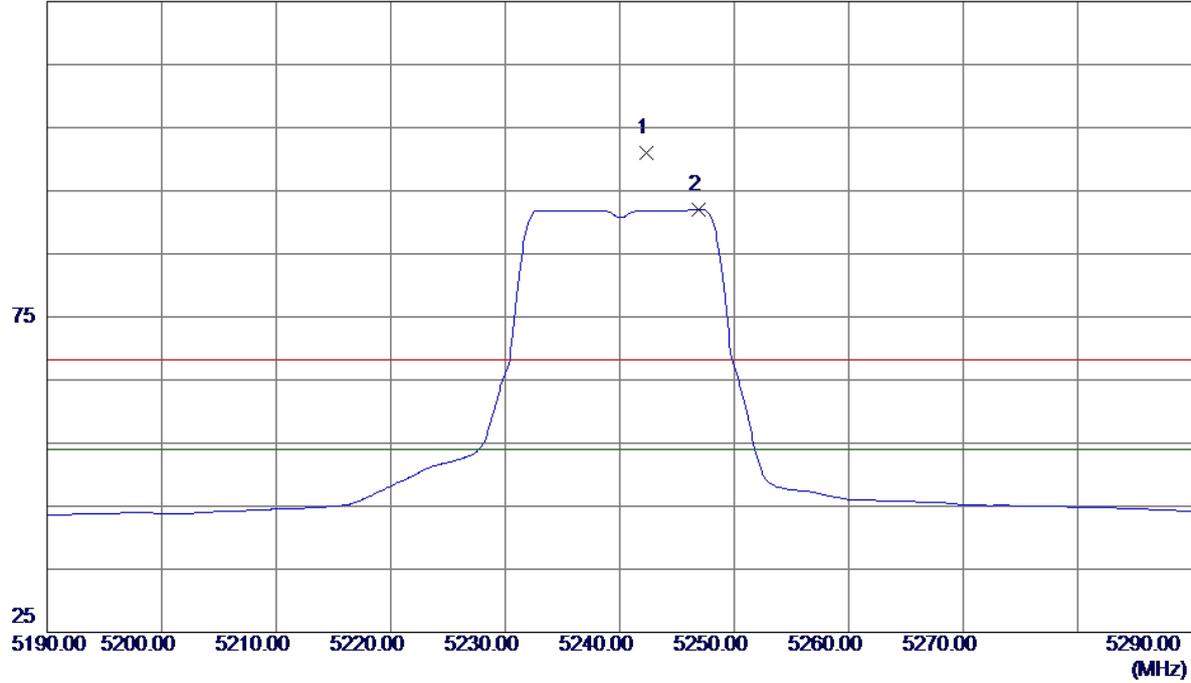

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5242.3000	60.11	40.93	101.04	68.30	32.74	Peak	No Limit
2 *	5246.9000	51.08	40.94	92.02	54.00	38.02	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


**Horizontal**

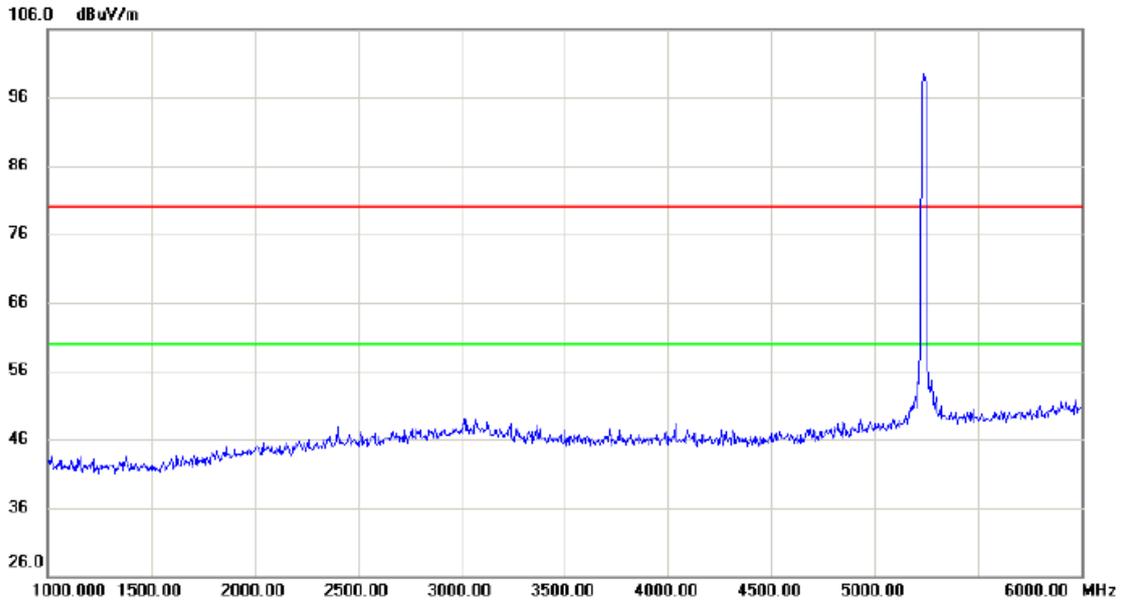

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
		5240	96		96	78	18		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

**Horizontal**

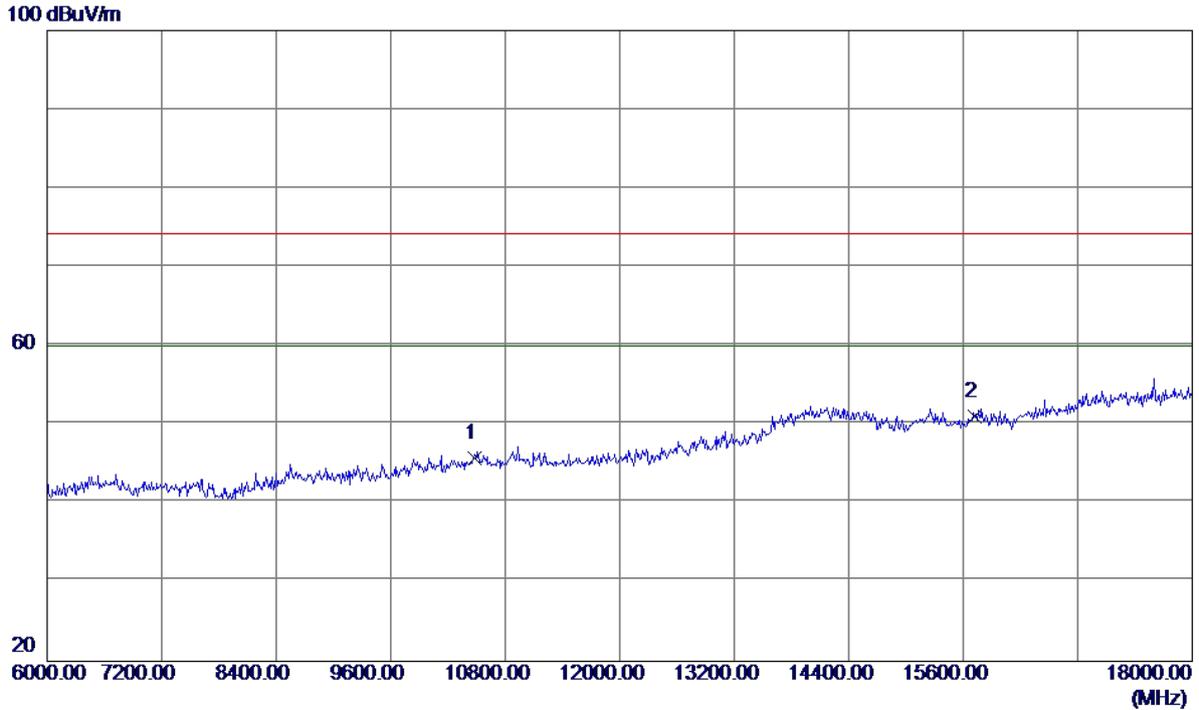


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.0000	30.29	15.54	45.83	74.20	-28.37	Peak	
2 *	15720.0000	32.21	18.88	51.09	74.20	-23.11	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

**Horizontal**


100 dBuV/m

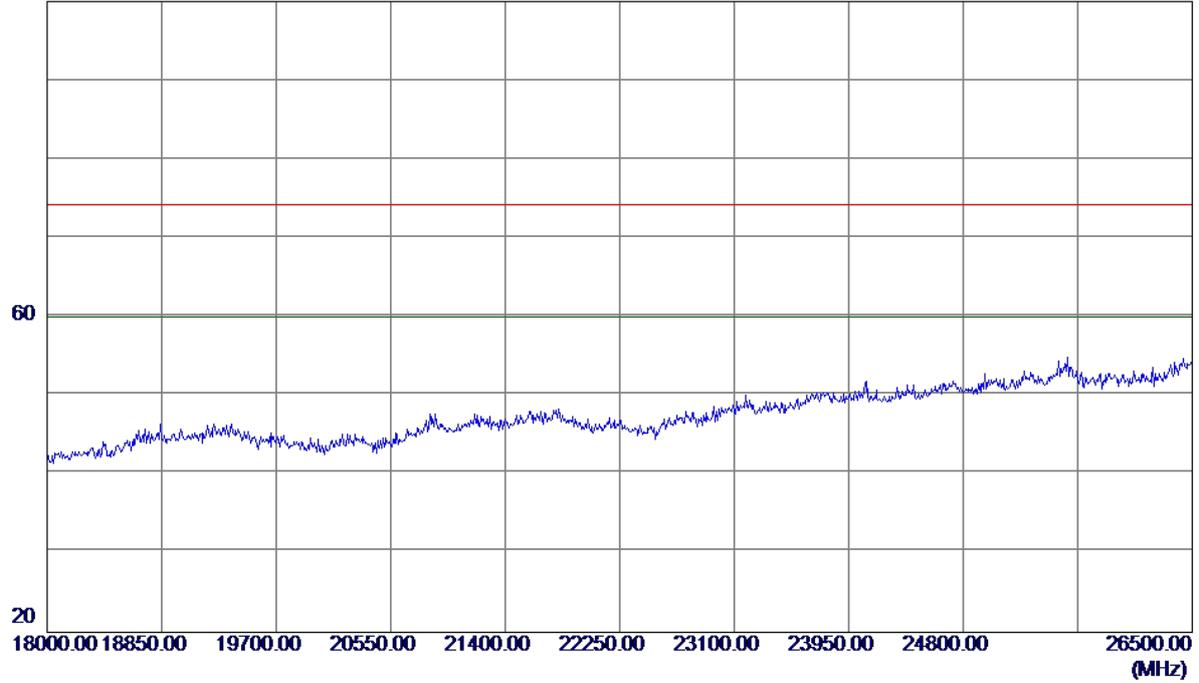

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

**Horizontal**

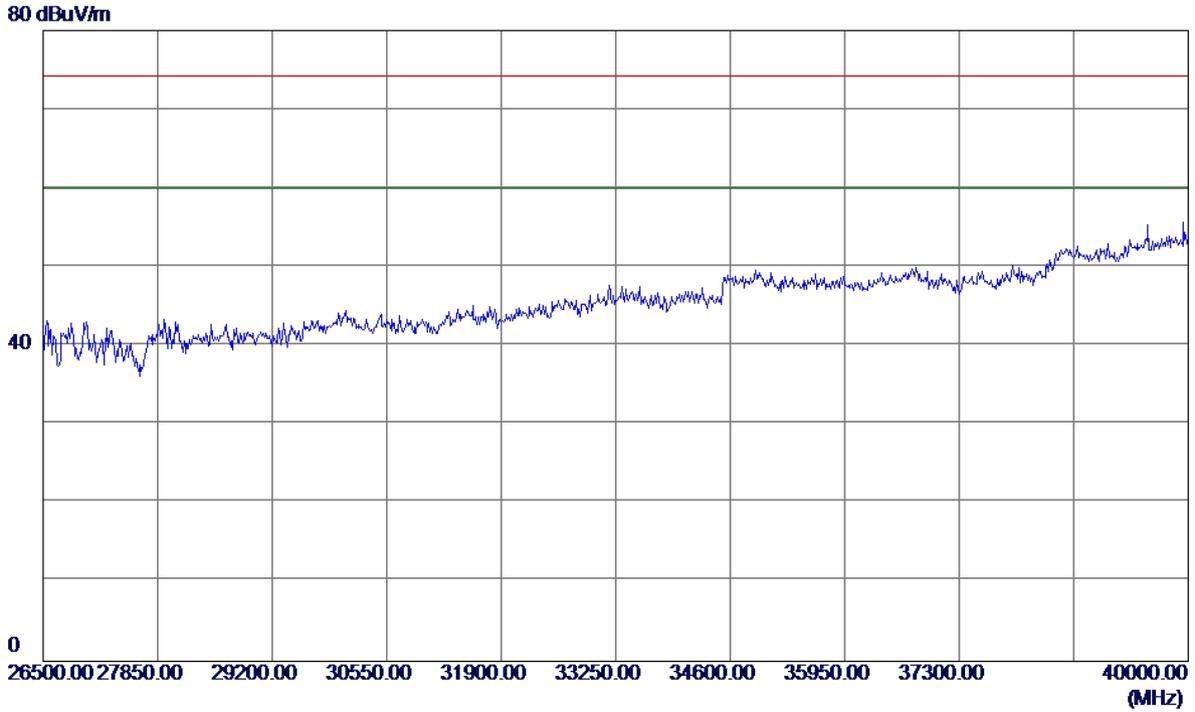


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

**Vertical**


125 dBuV/m

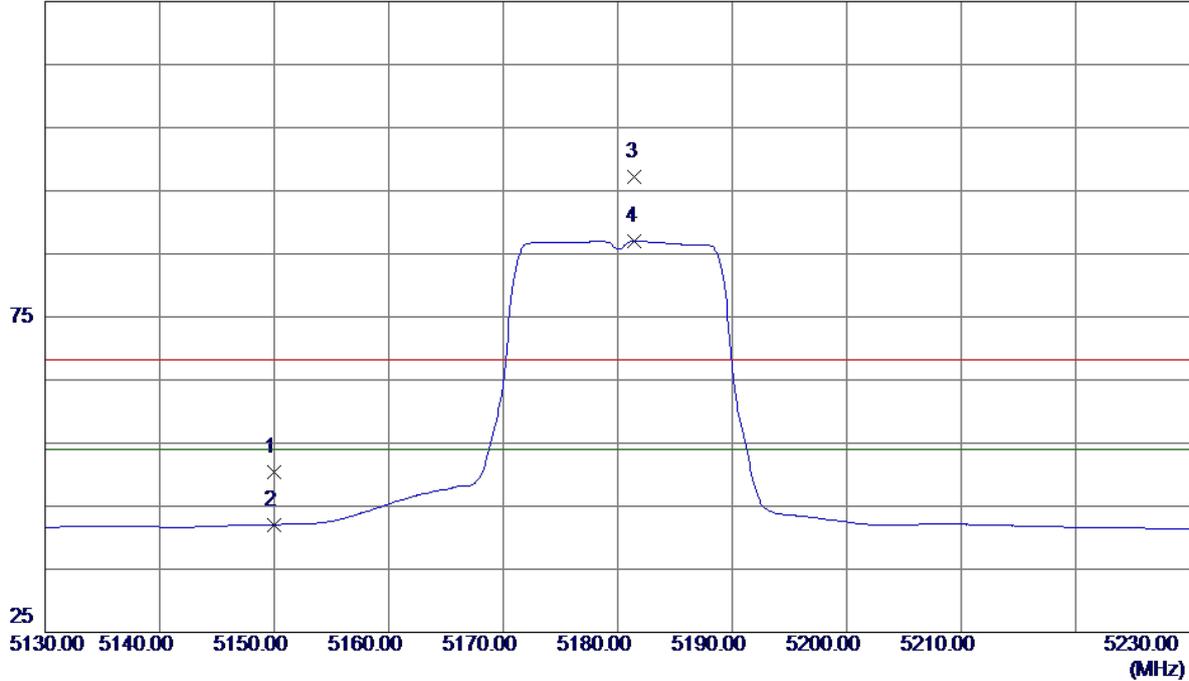

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	9.82	40.62	50.44	68.30	-17.86	Peak	
2	5150.0000	1.46	40.62	42.08	54.00	-11.92	AVG	
3	5181.5000	56.40	40.73	97.13	68.30	28.83	Peak	No Limit
4 *	5181.5000	46.30	40.73	87.03	54.00	33.03	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


**Vertical**

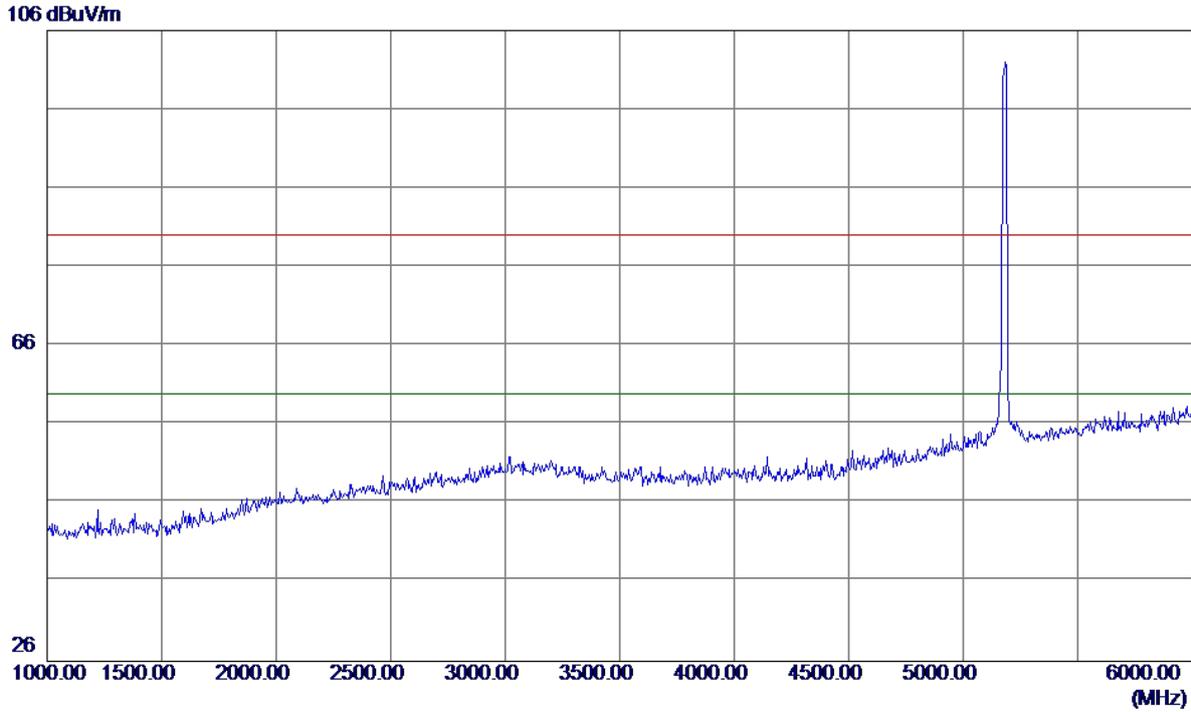

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

**Vertical**

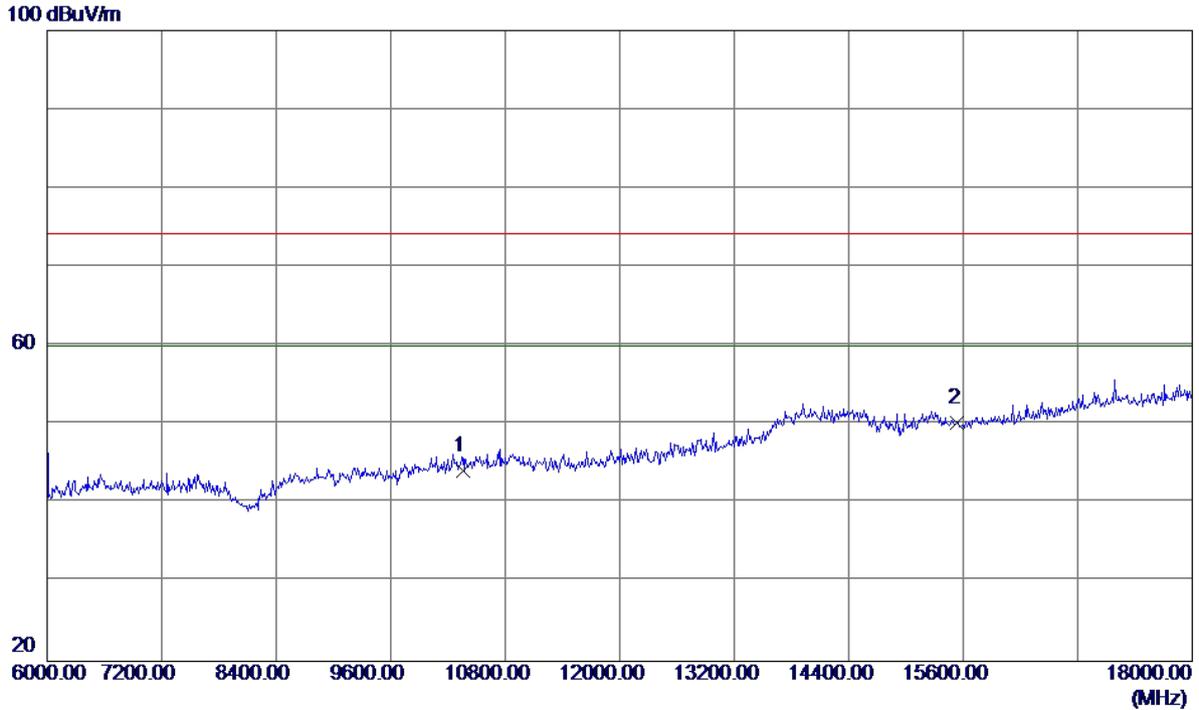


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.0000	28.87	15.23	44.10	74.20	-30.10	Peak	
2 *	15540.0000	31.31	18.87	50.18	74.20	-24.02	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

**Vertical**

100 dBuV/m

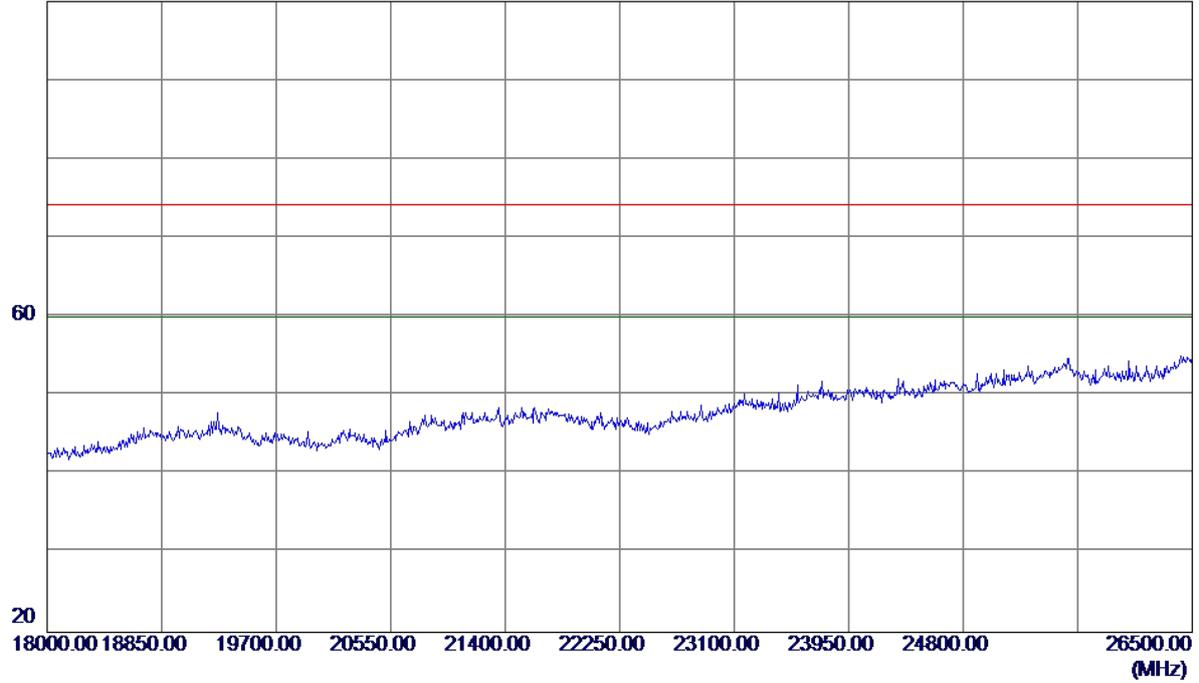


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------



Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

**Horizontal**


125 dBuV/m

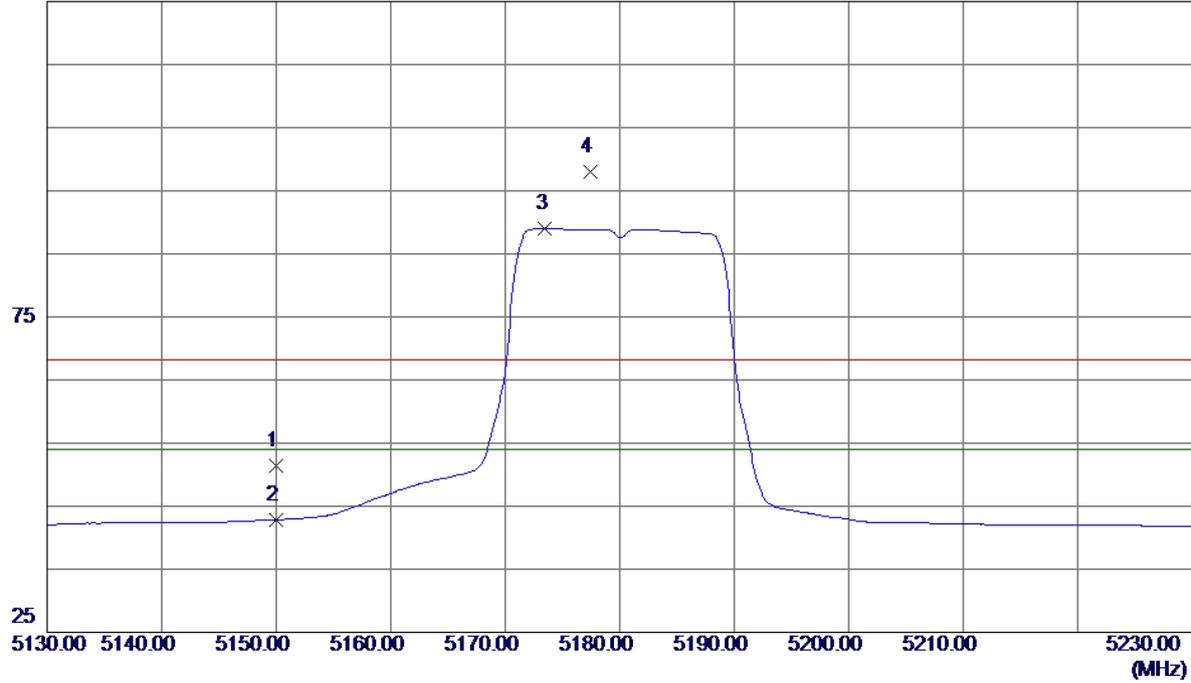

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	10.87	40.62	51.49	68.30	-16.81	Peak	
2	5150.0000	2.20	40.62	42.82	54.00	-11.18	AVG	
3 *	5173.5000	48.30	40.70	89.00	54.00	35.00	AVG	No Limit
4	5177.4000	57.26	40.72	97.98	68.30	29.68	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

**Horizontal**

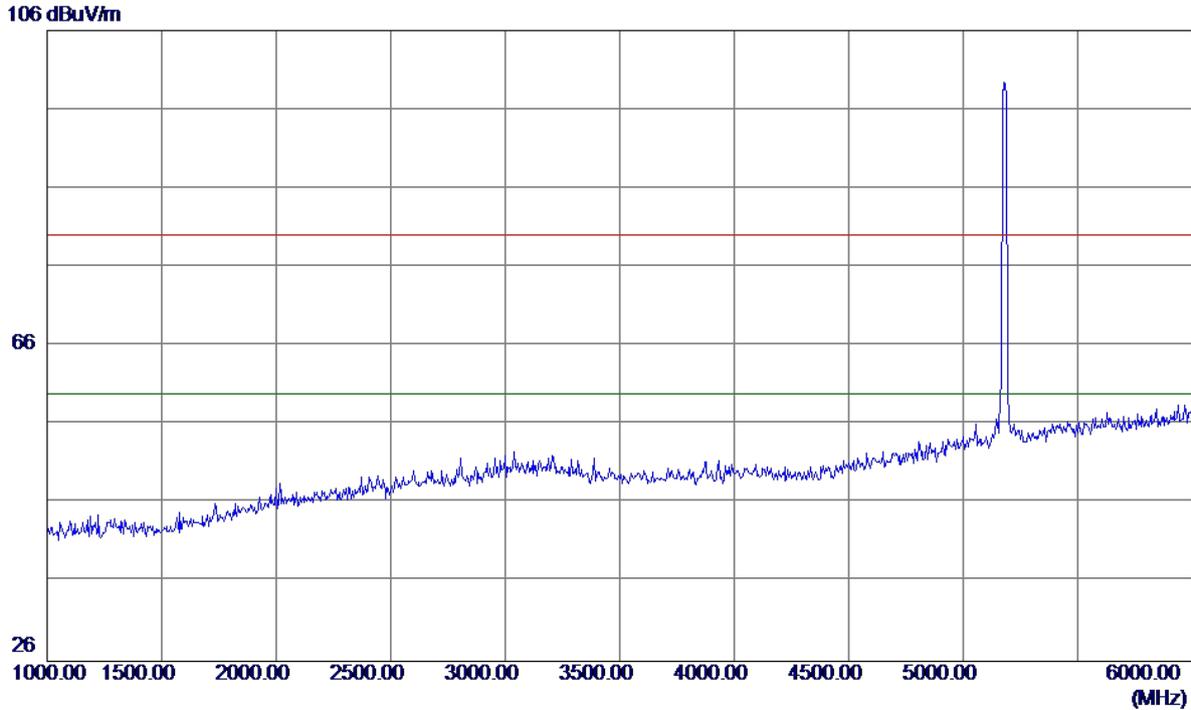


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

**Horizontal**

100 dBuV/m

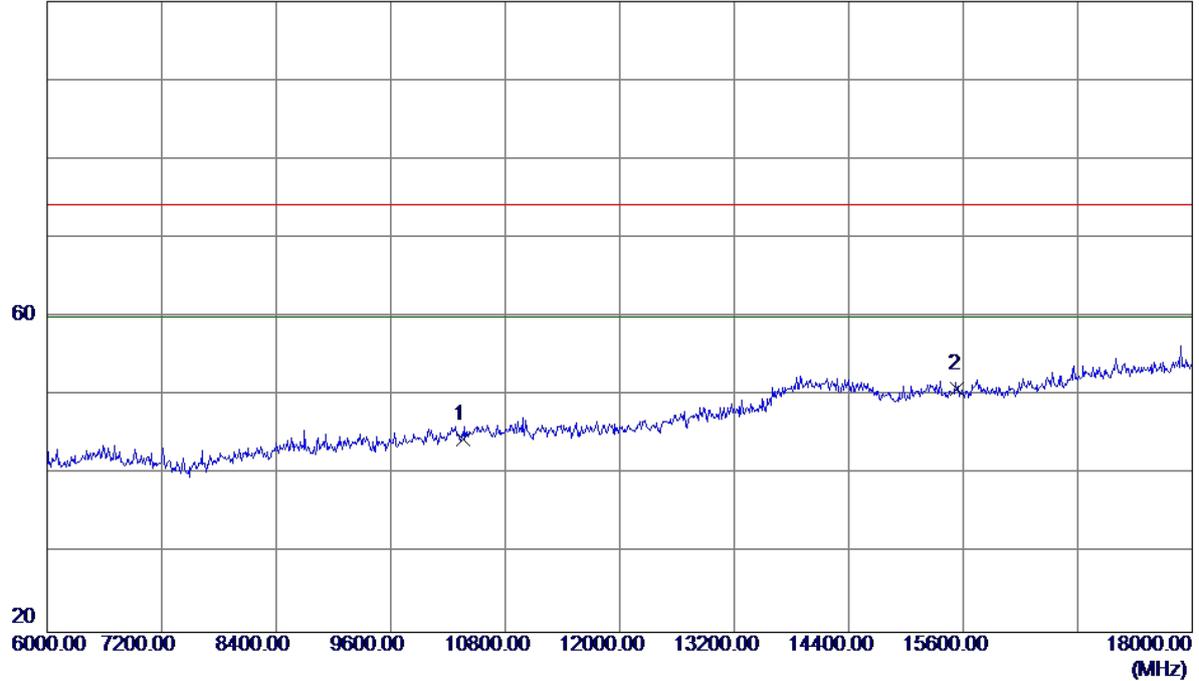


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.0000	29.22	15.23	44.45	74.20	-29.75	Peak	
2 *	15540.0000	31.96	18.87	50.83	74.20	-23.37	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

**Horizontal**


100 dBuV/m

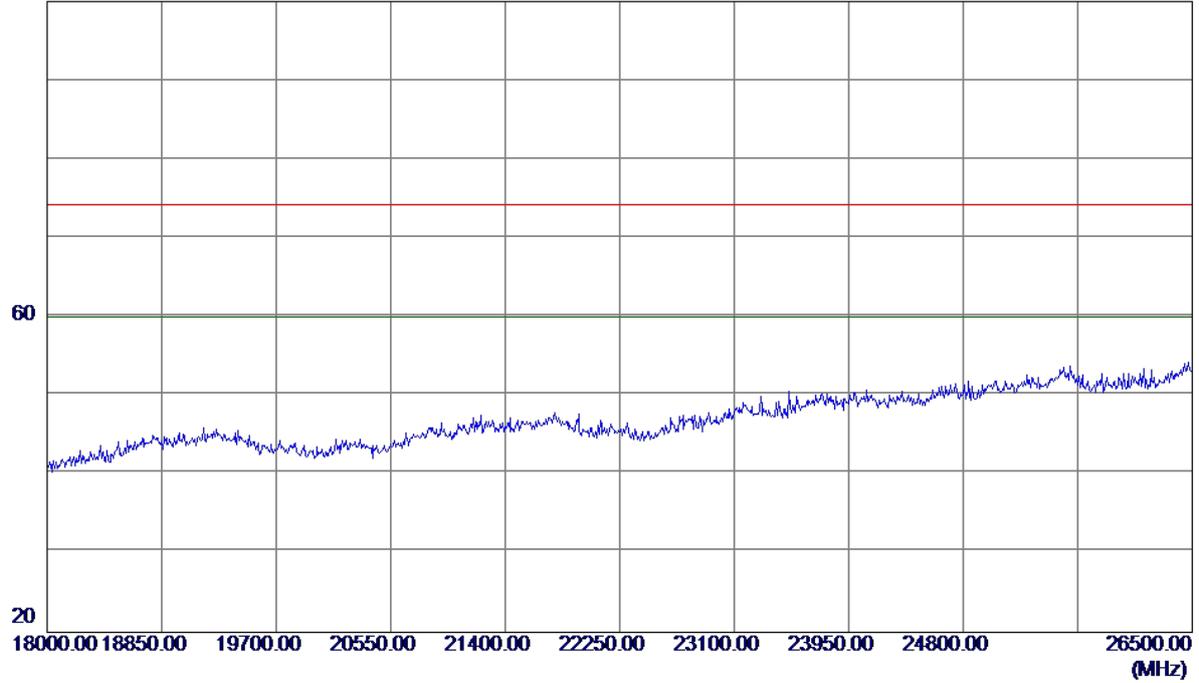

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

**Horizontal**

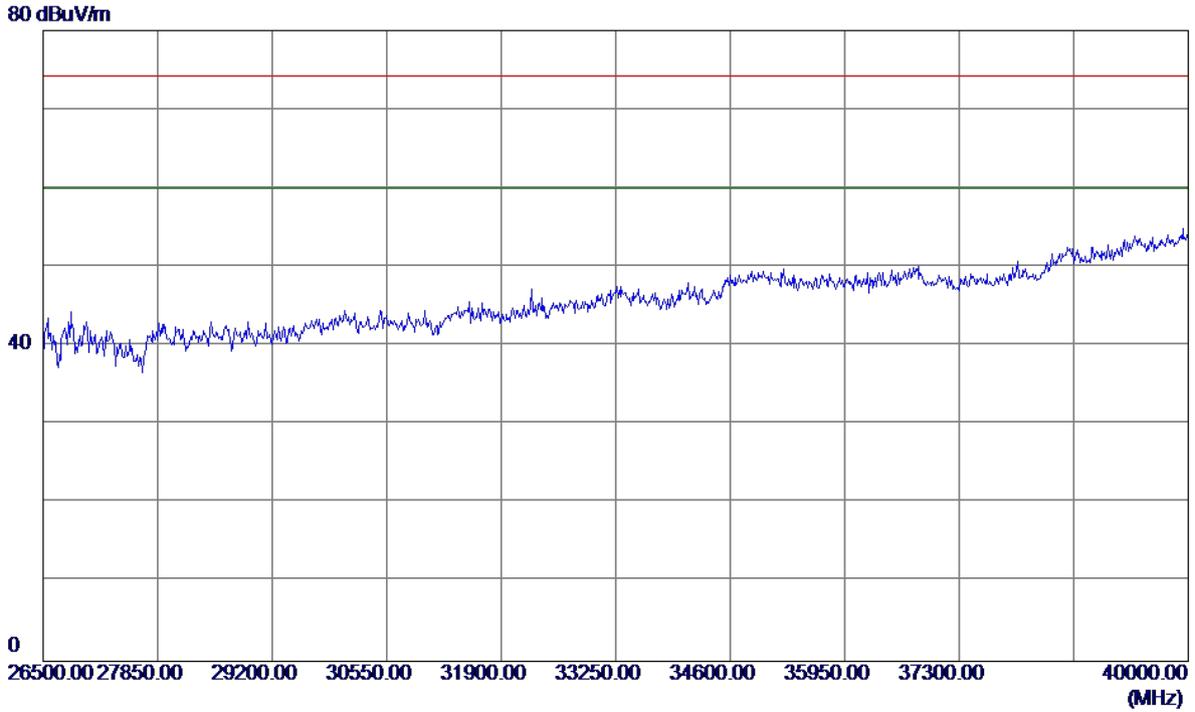


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

**Vertical**


125 dBuV/m

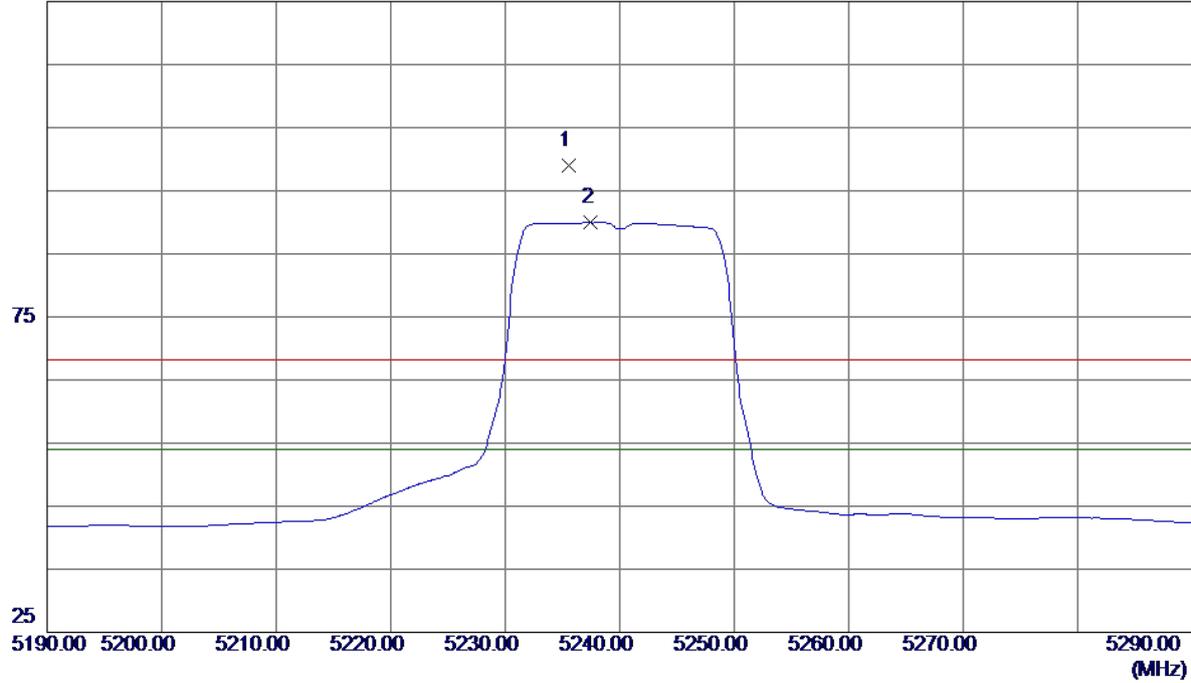

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5235.6000	58.04	40.91	98.95	68.30	30.65	Peak	No Limit
2 *	5237.5000	49.07	40.91	89.98	54.00	35.98	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


**Vertical**

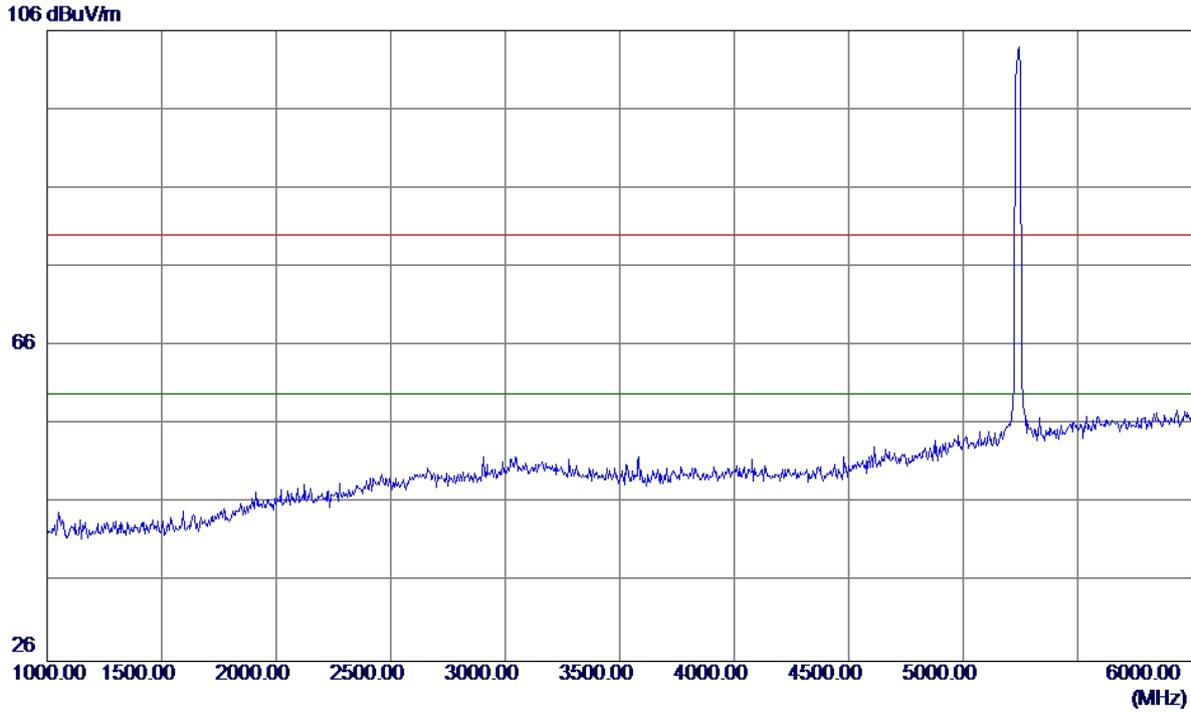

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

**Vertical**

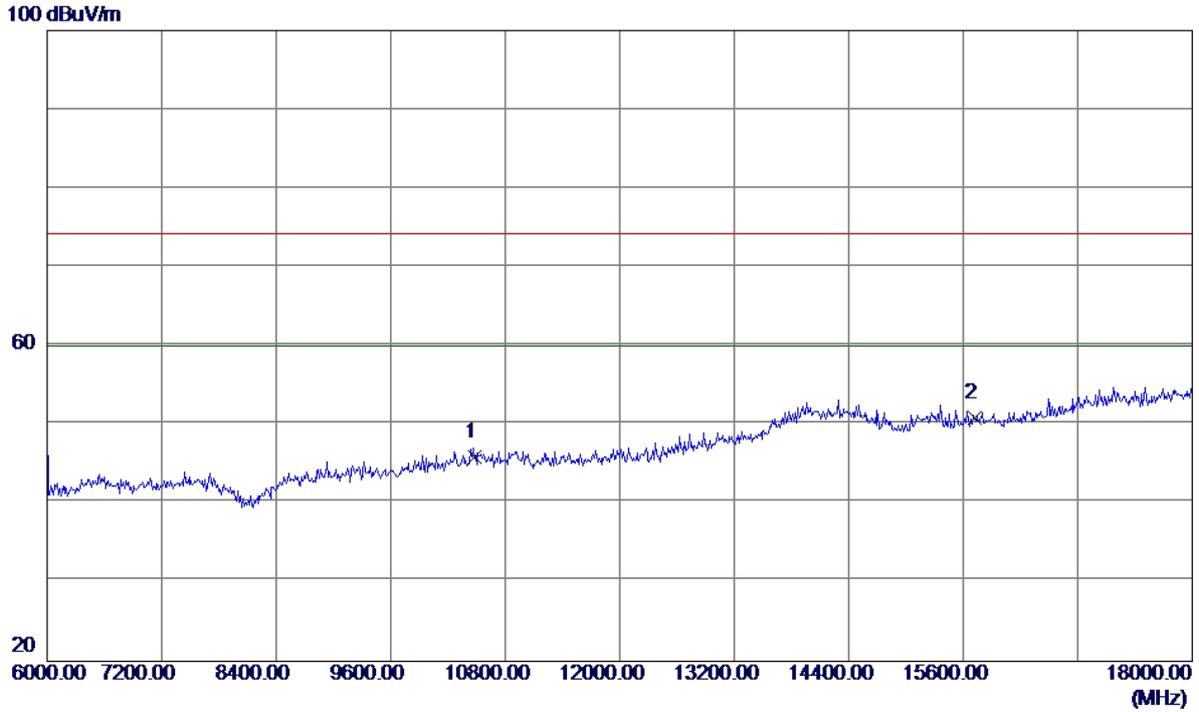


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.0000	30.33	15.54	45.87	74.20	-28.33	Peak	
2 *	15720.0000	31.96	18.88	50.84	74.20	-23.36	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

**Vertical**


100 dBuV/m

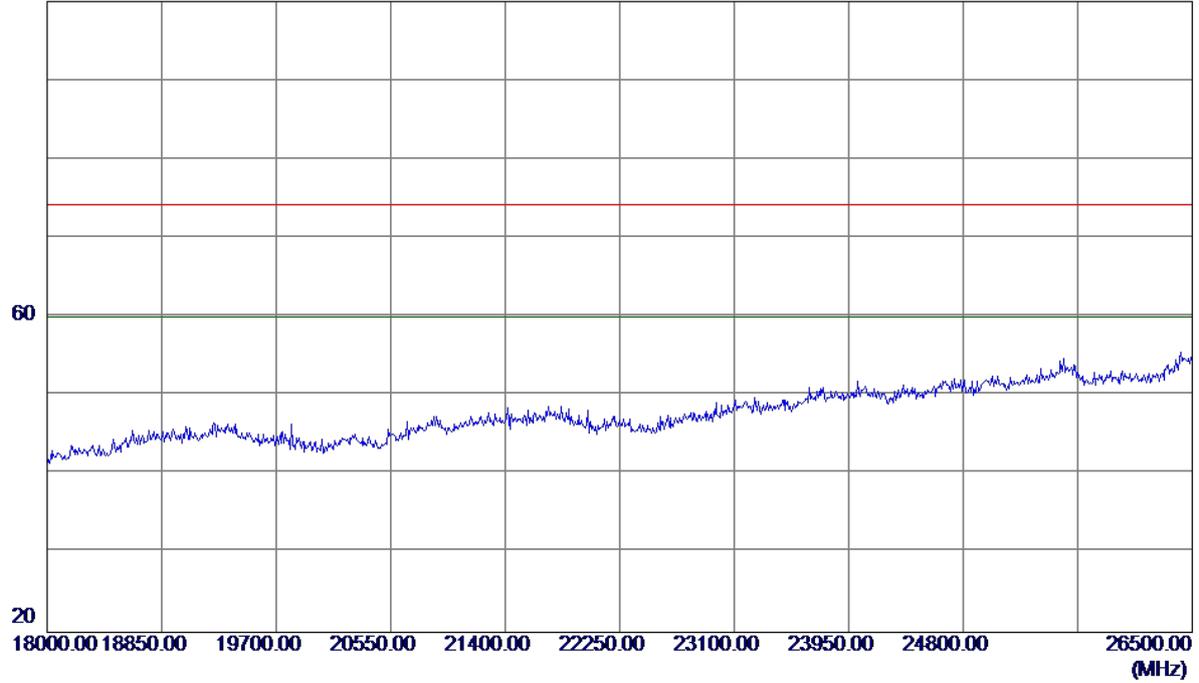

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

**Vertical**

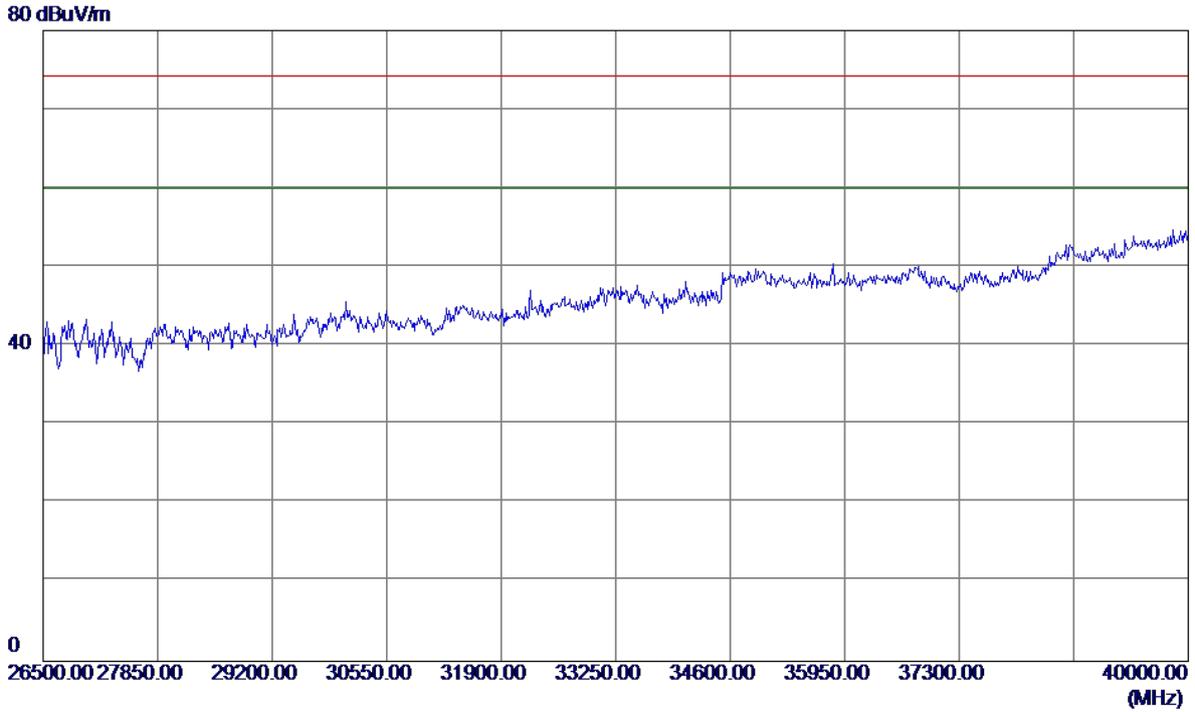


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

**Horizontal**


125 dBuV/m

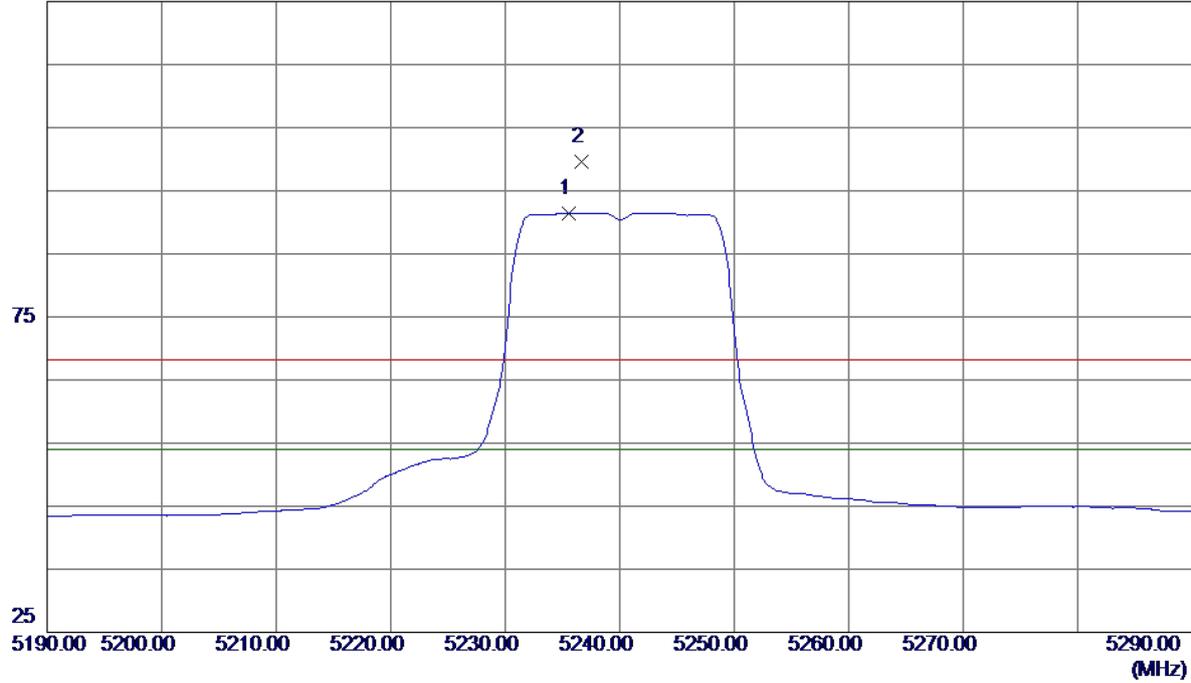

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5235.6000	50.56	40.91	91.47	54.00	37.47	AVG	No Limit
2	5236.7000	58.62	40.91	99.53	68.30	31.23	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


**Horizontal**

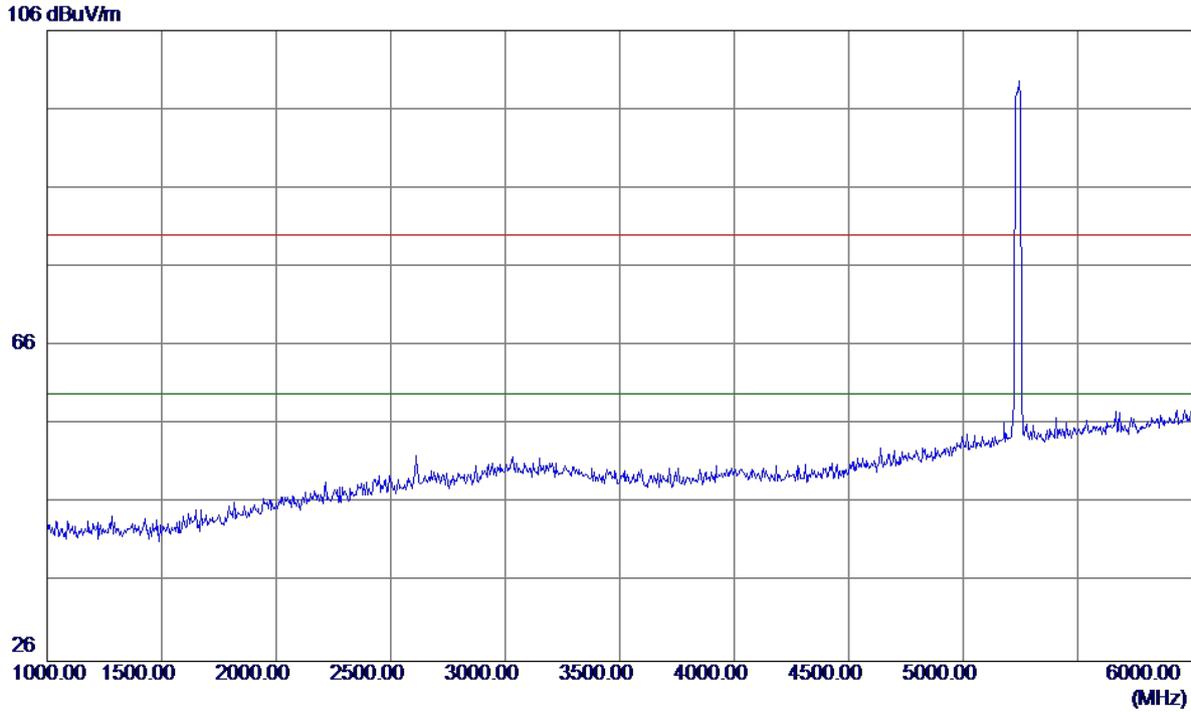

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

**Horizontal**

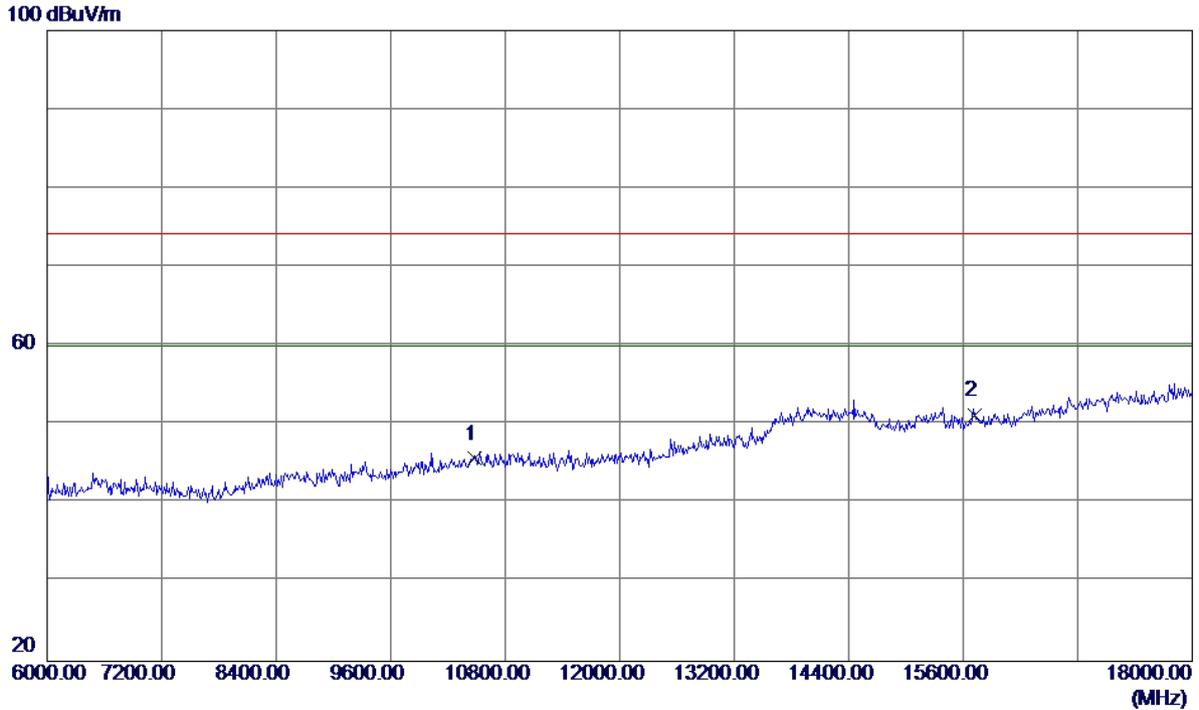


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.0000	30.14	15.54	45.68	74.20	-28.52	Peak	
2 *	15720.0000	32.39	18.88	51.27	74.20	-22.93	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

**Horizontal**


100 dBuV/m

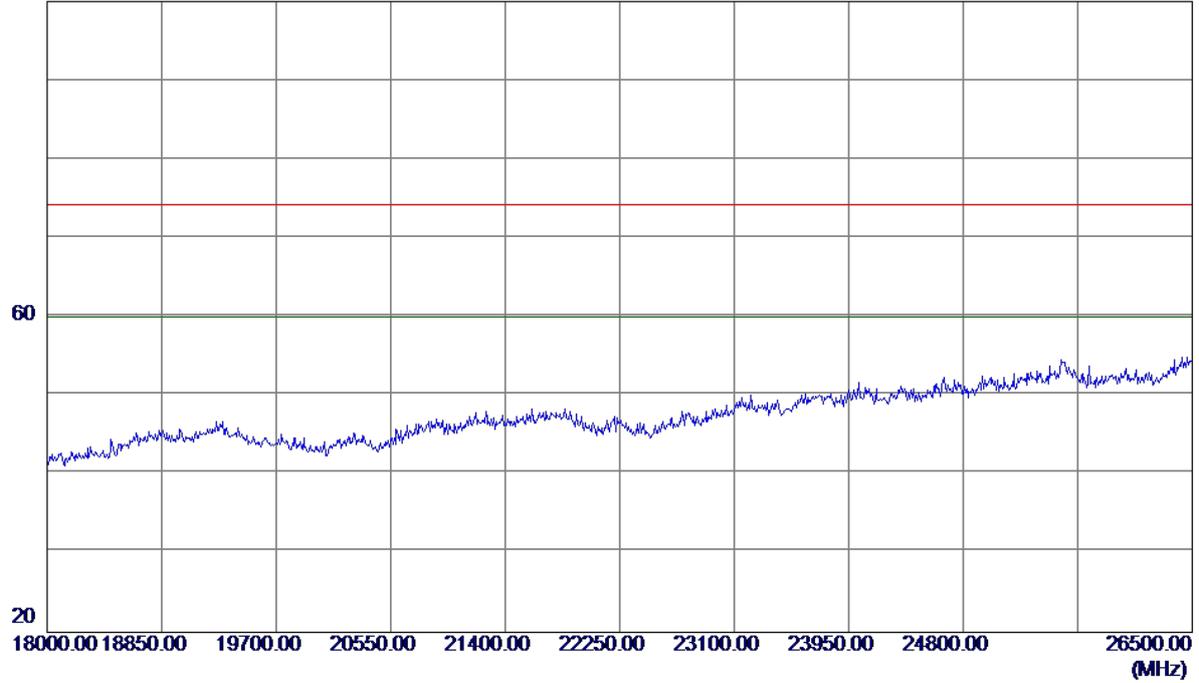

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

**Horizontal**

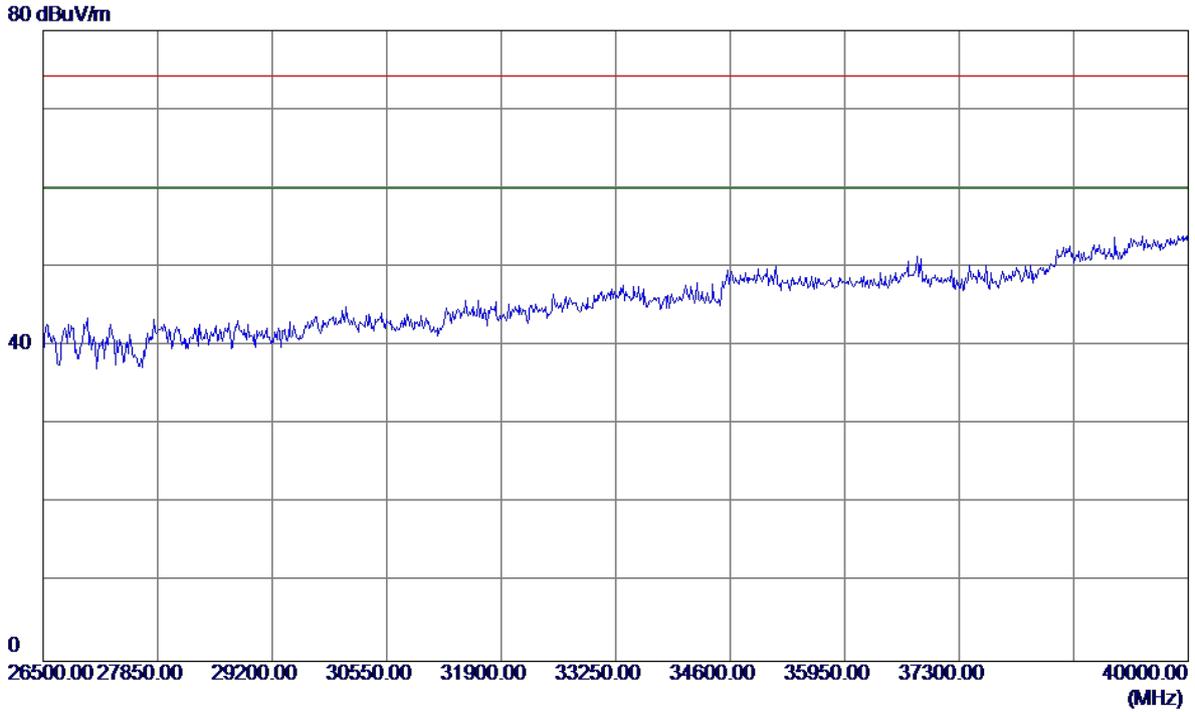


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

**Vertical**


125 dBuV/m

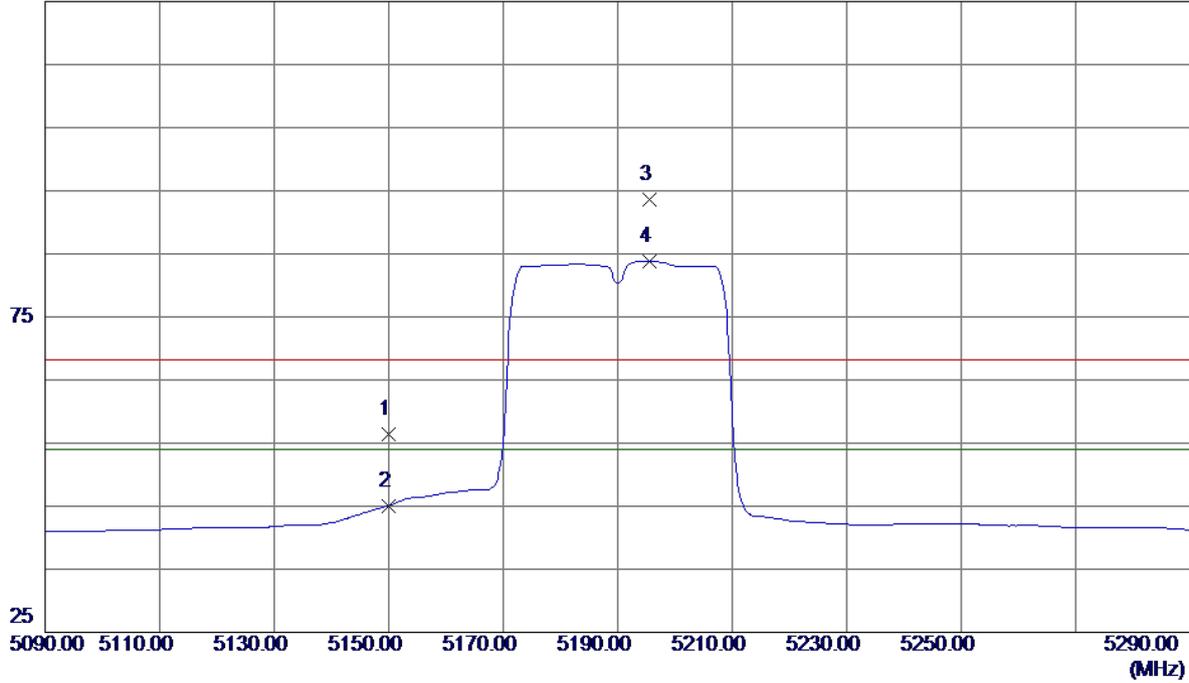

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	15.74	40.62	56.36	68.30	-11.94	Peak	
2	5150.0000	4.47	40.62	45.09	54.00	-8.91	AVG	
3	5195.6000	52.80	40.78	93.58	68.30	25.28	Peak	No Limit
4 *	5195.6000	43.10	40.78	83.88	54.00	29.88	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

**Vertical**

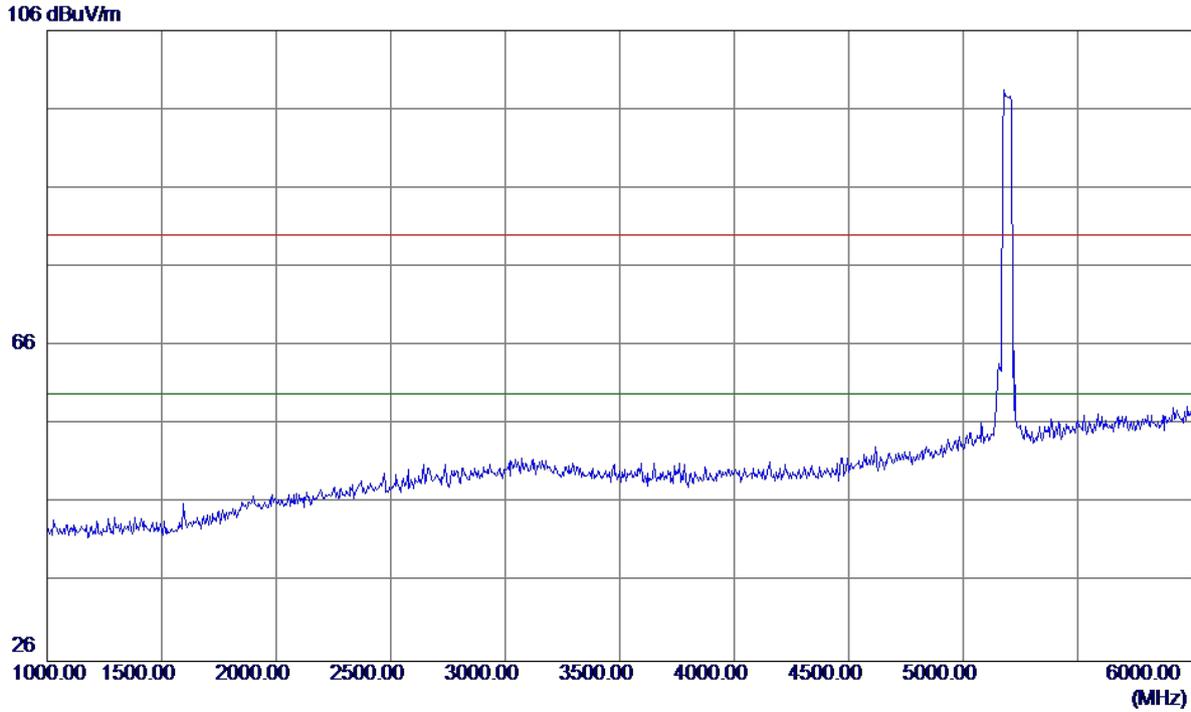


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

**Vertical**

100 dBuV/m

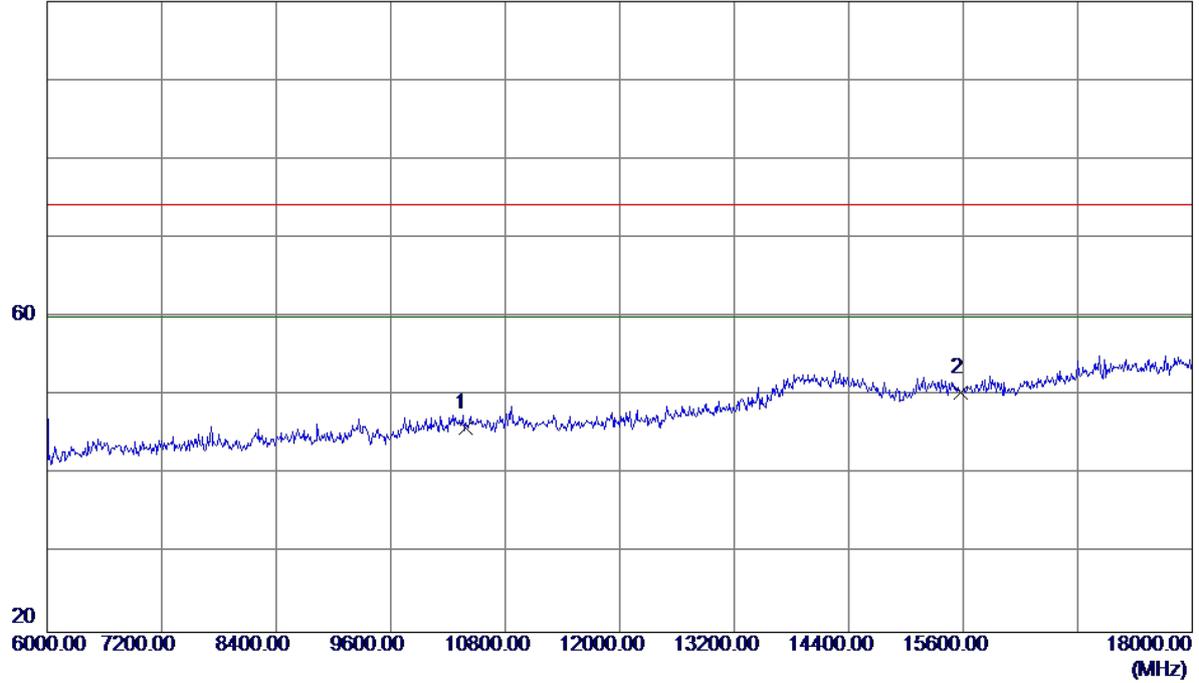


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10380.0000	30.68	15.29	45.97	74.20	-28.23	Peak	
2 *	15570.0000	31.53	18.87	50.40	74.20	-23.80	Peak	



Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

**Vertical**

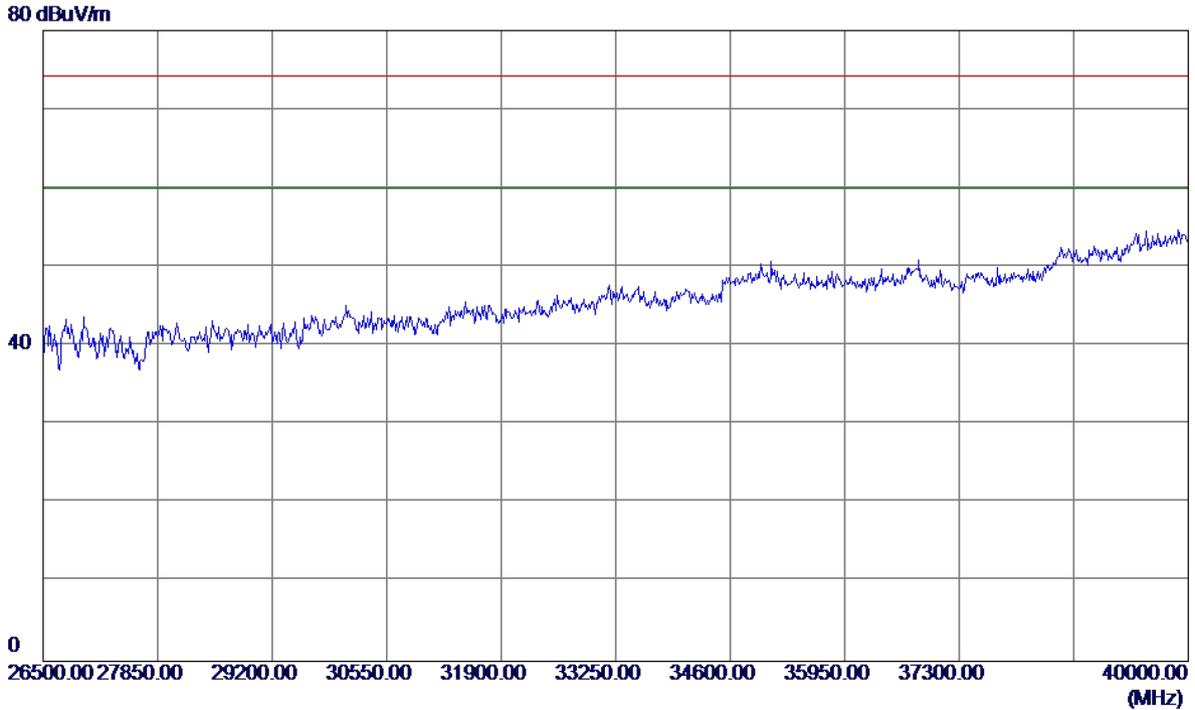


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

**Horizontal**


125 dBuV/m

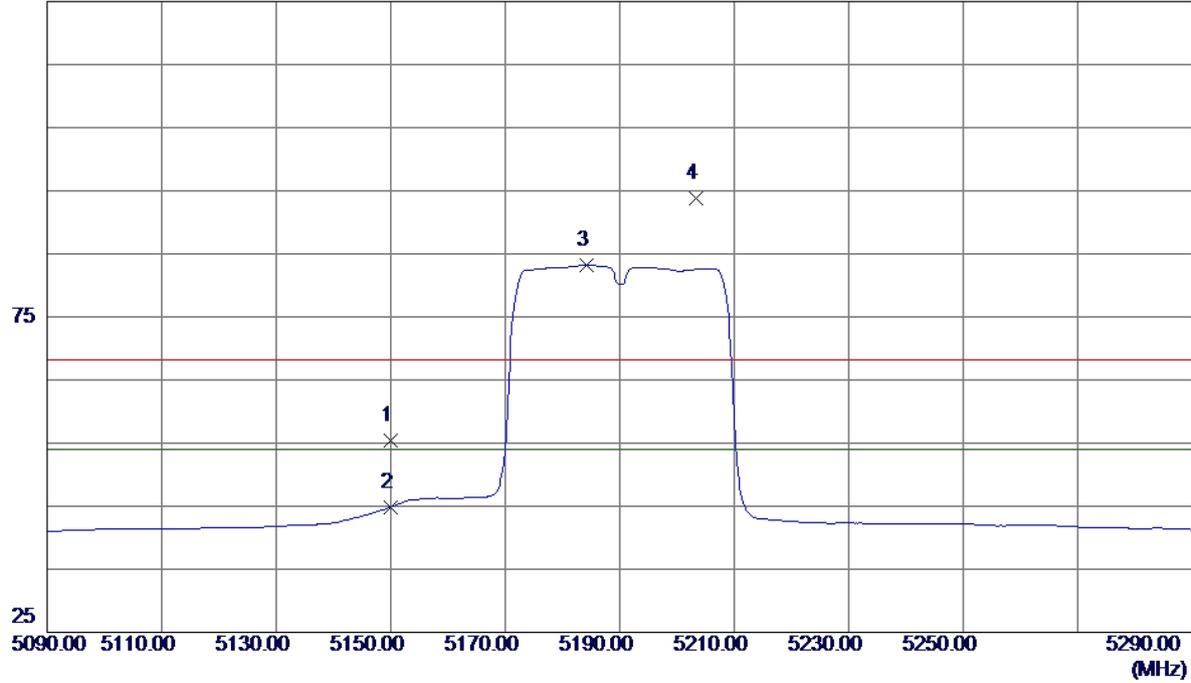

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	14.74	40.62	55.36	68.30	-12.94	Peak	
2	5150.0000	4.23	40.62	44.85	54.00	-9.15	AVG	
3 *	5184.2000	42.46	40.74	83.20	54.00	29.20	AVG	No Limit
4	5203.4000	52.95	40.80	93.75	68.30	25.45	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

**Horizontal**

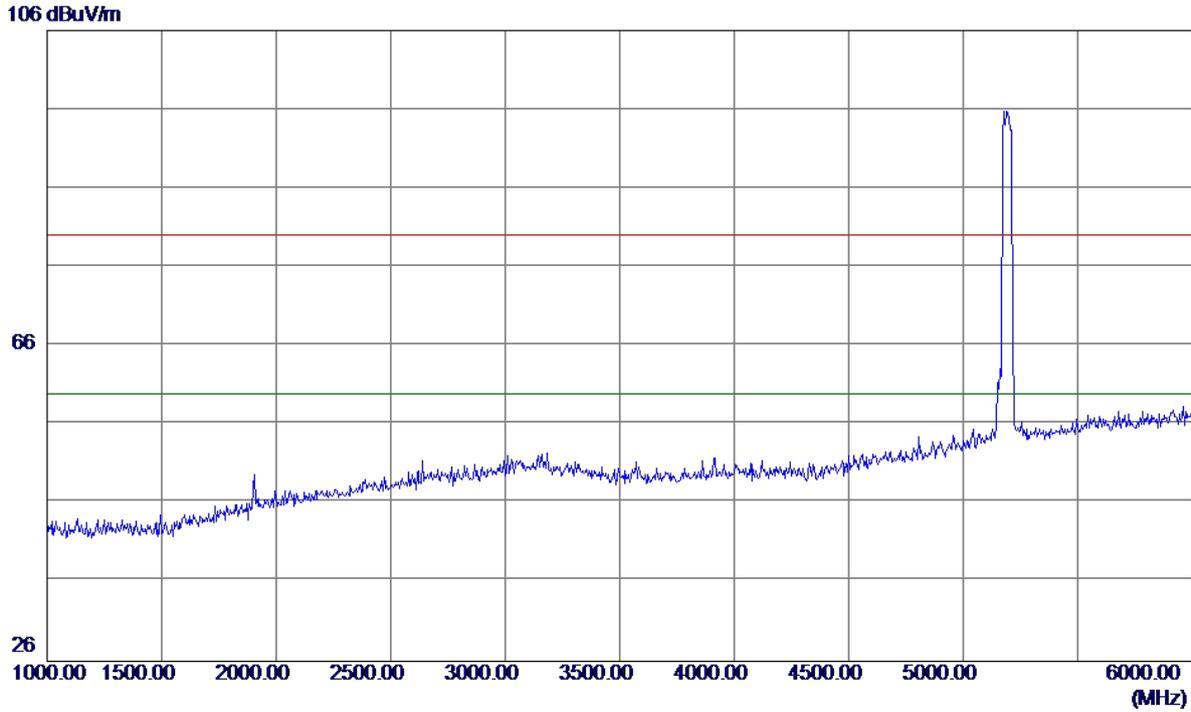


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

**Horizontal**

100 dBuV/m

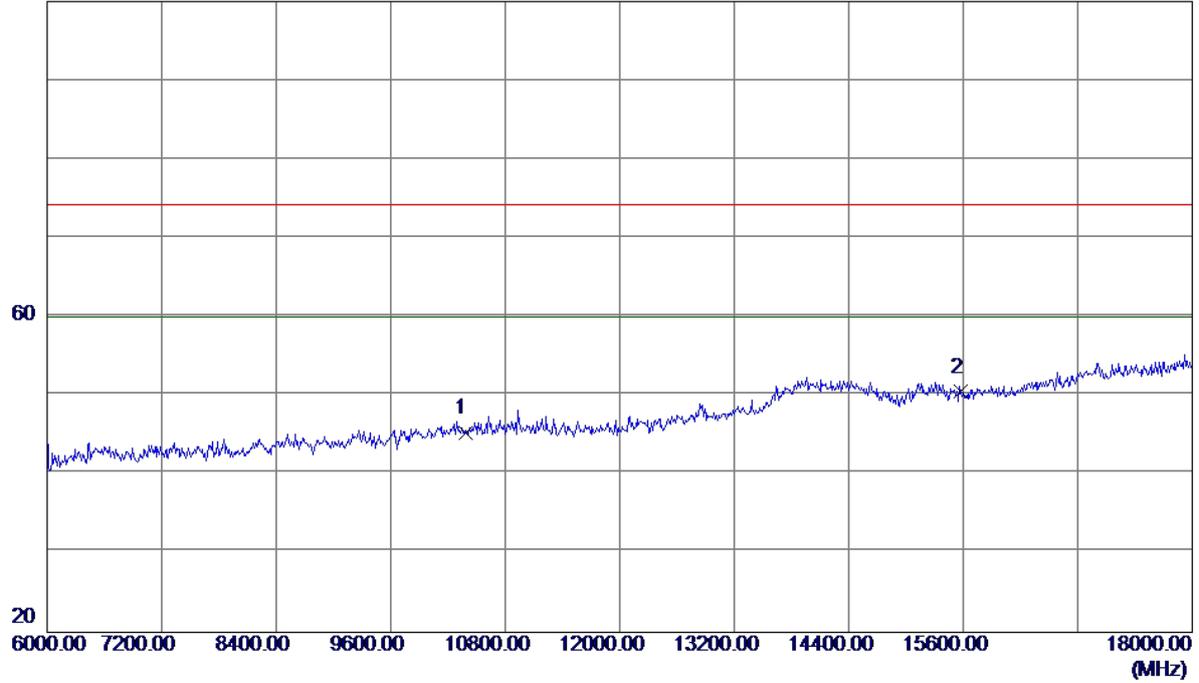


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10380.0000	29.95	15.29	45.24	74.20	-28.96	Peak	
2 *	15570.0000	31.61	18.87	50.48	74.20	-23.72	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

**Horizontal**

100 dBuV/m

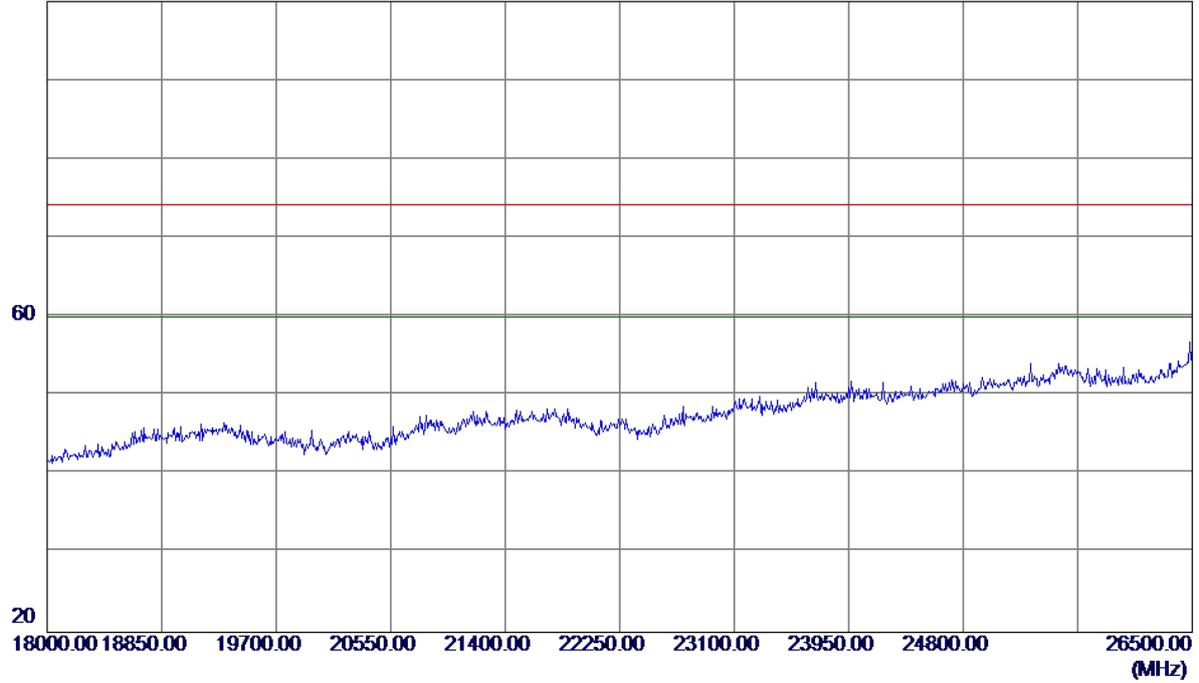


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------



Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

**Vertical**


125 dBuV/m

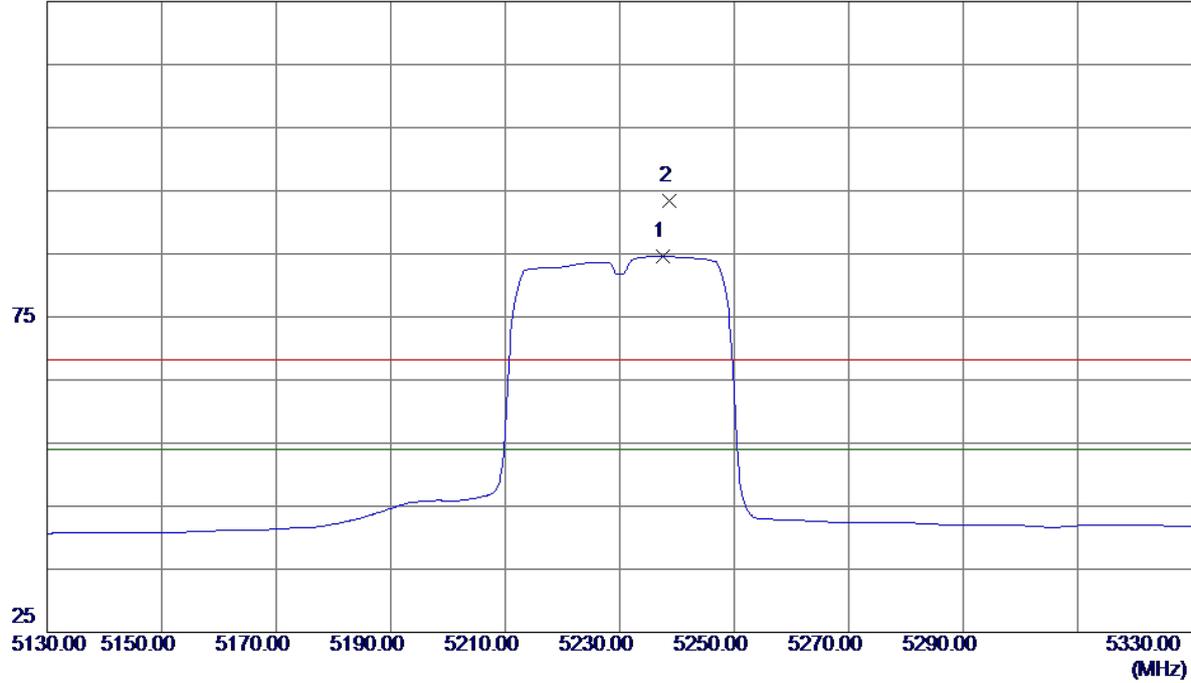

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5237.6000	43.73	40.91	84.64	54.00	30.64	AVG	No Limit
2	5238.6000	52.54	40.92	93.46	68.30	25.16	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

**Vertical**

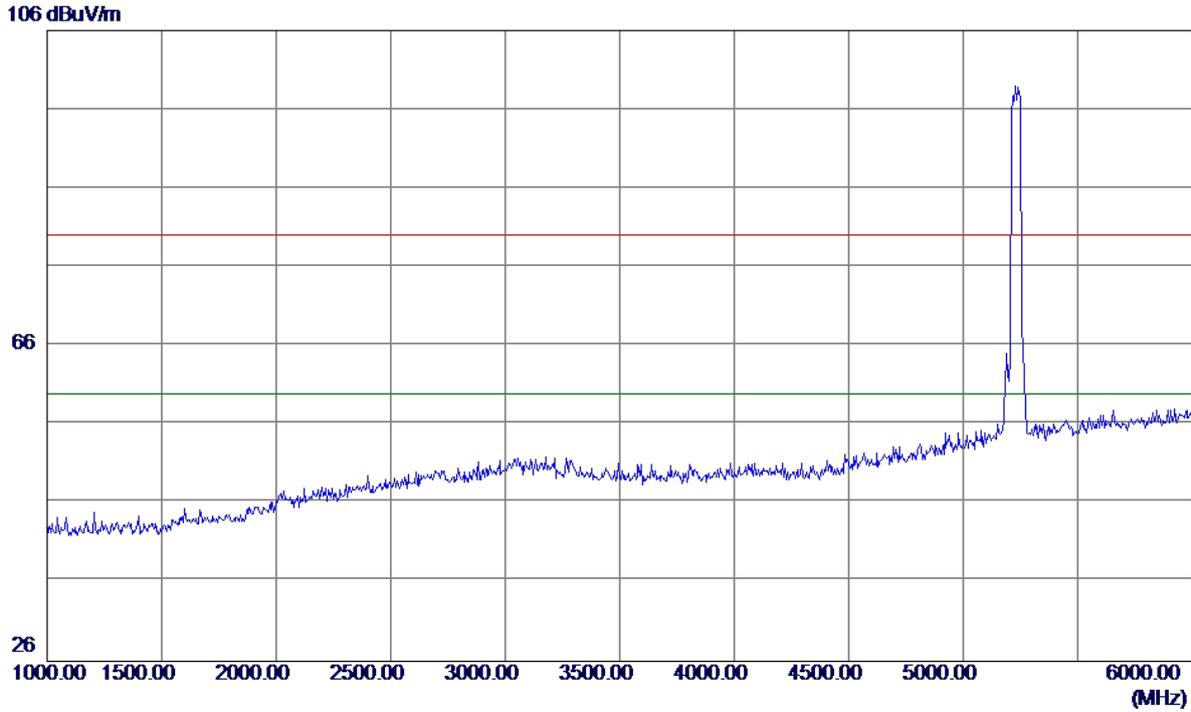


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

**Vertical**

100 dBuV/m

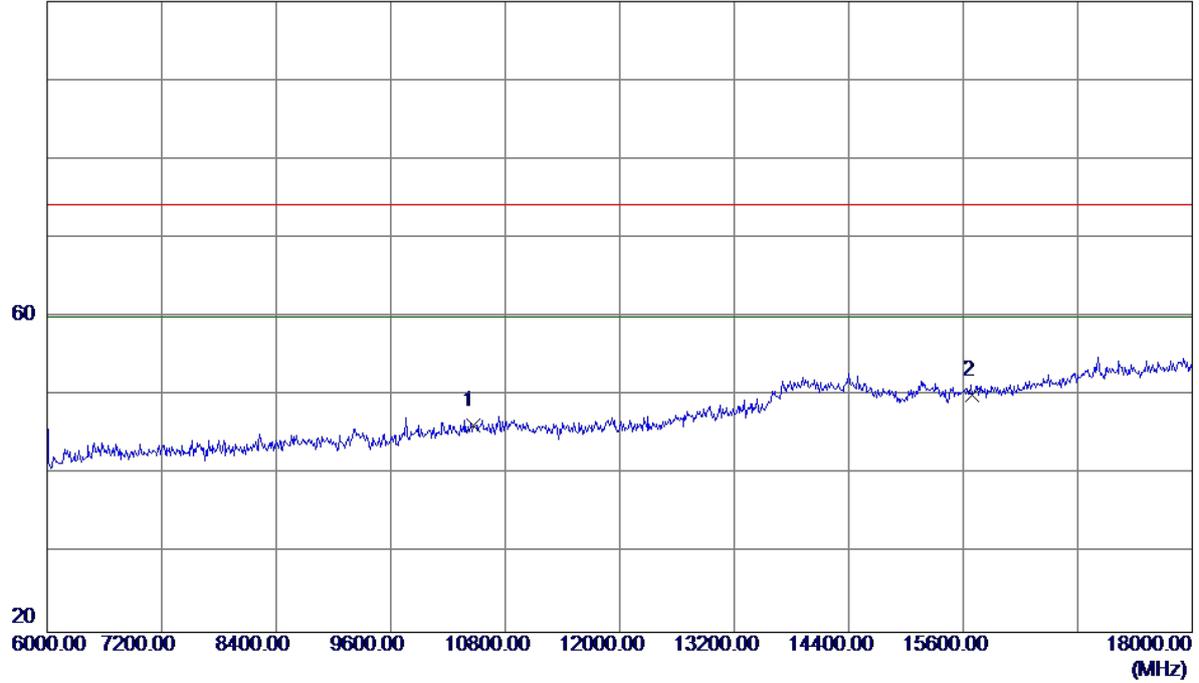


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10460.0000	30.70	15.49	46.19	74.20	-28.01	Peak	
2 *	15690.0000	31.22	18.88	50.10	74.20	-24.10	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

**Vertical**

100 dBuV/m

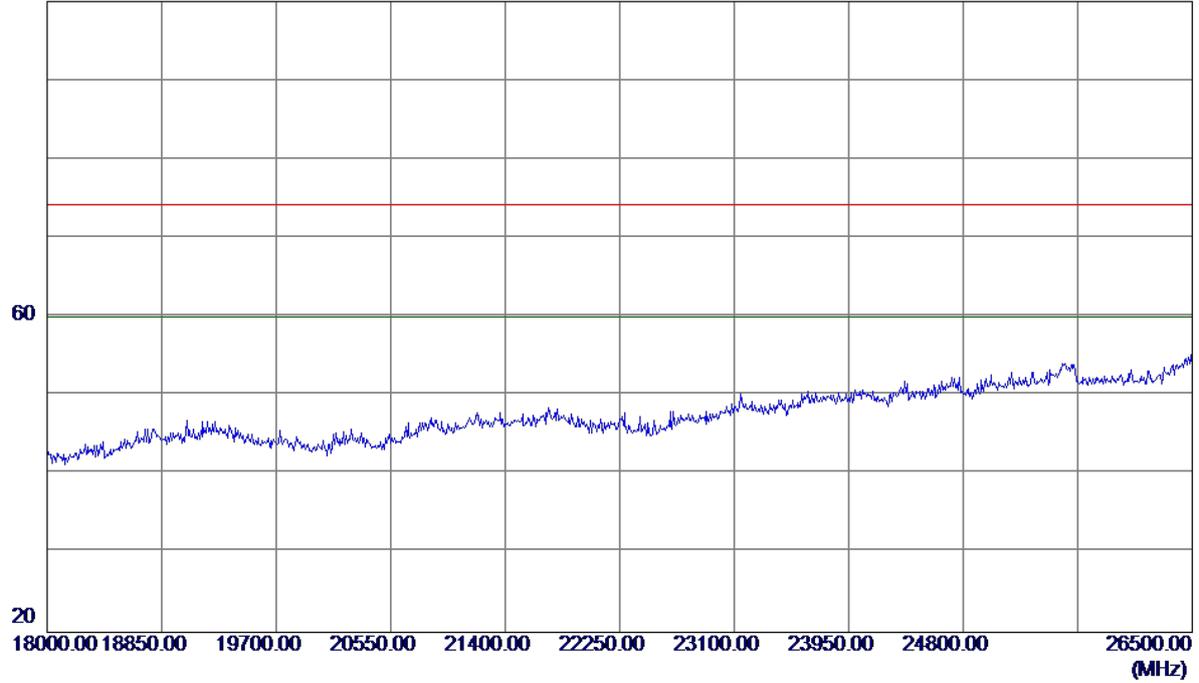


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------



Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


**Horizontal**

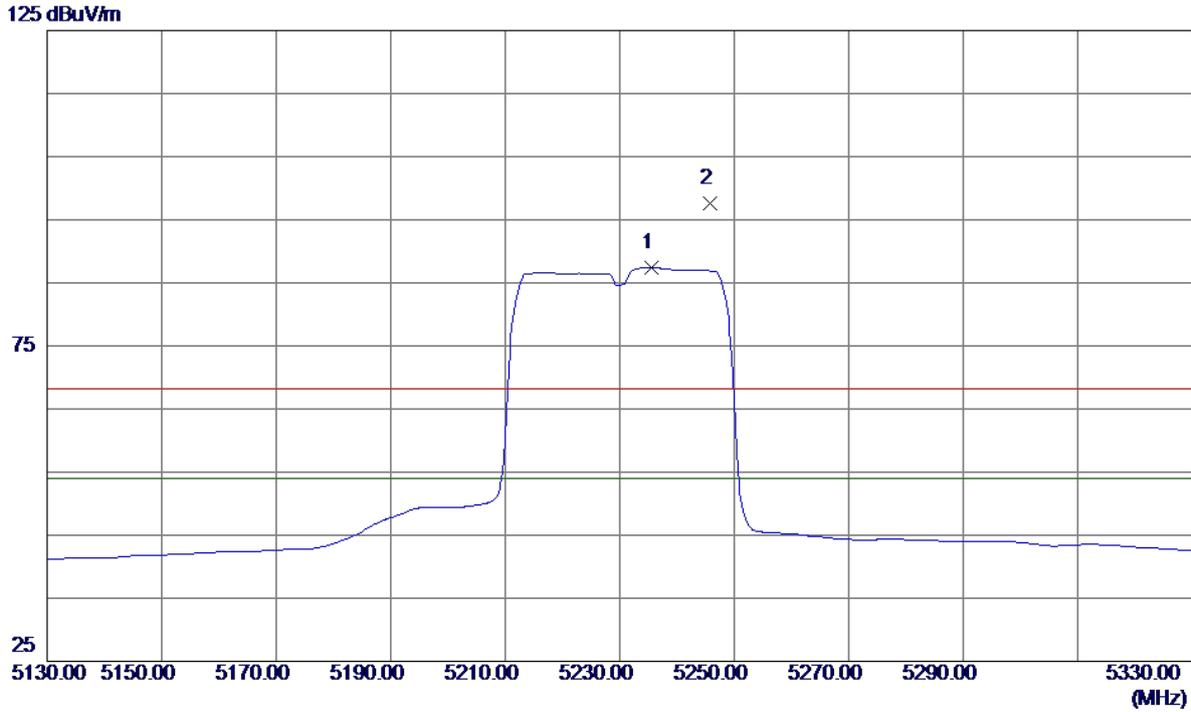

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5235.6000	46.50	40.91	87.41	54.00	33.41	AVG	No Limit
2	5245.8000	56.58	40.94	97.52	68.30	29.22	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


**Horizontal**

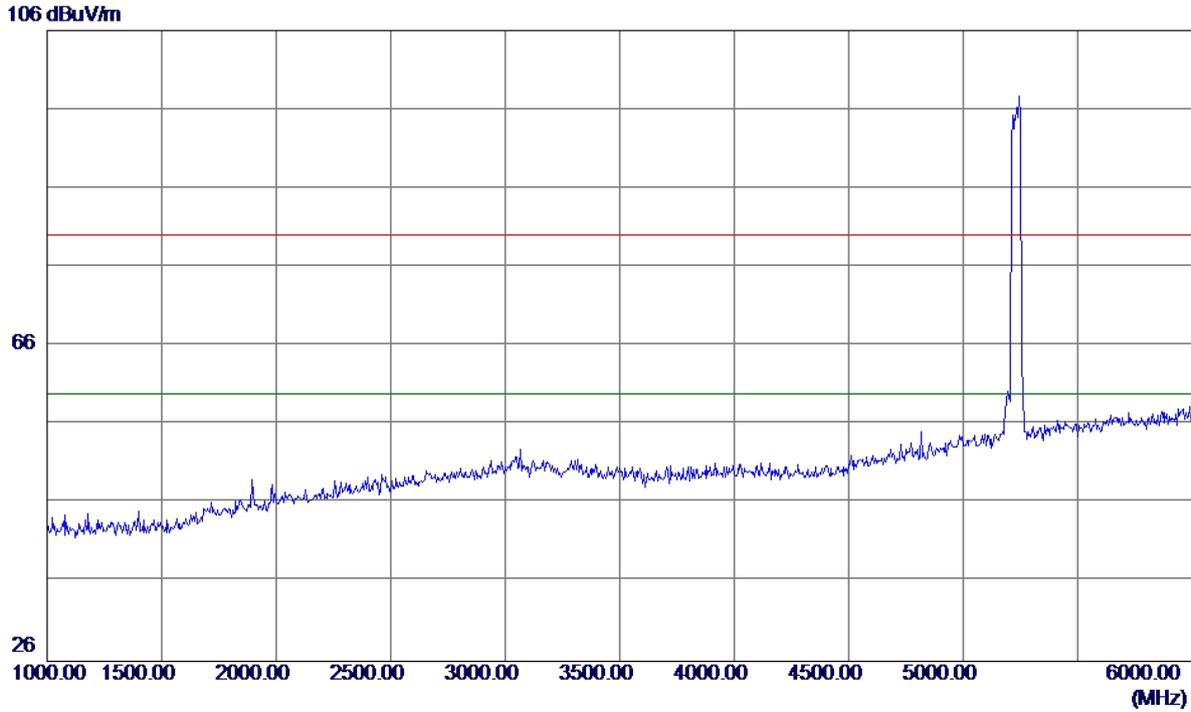

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

**Horizontal**

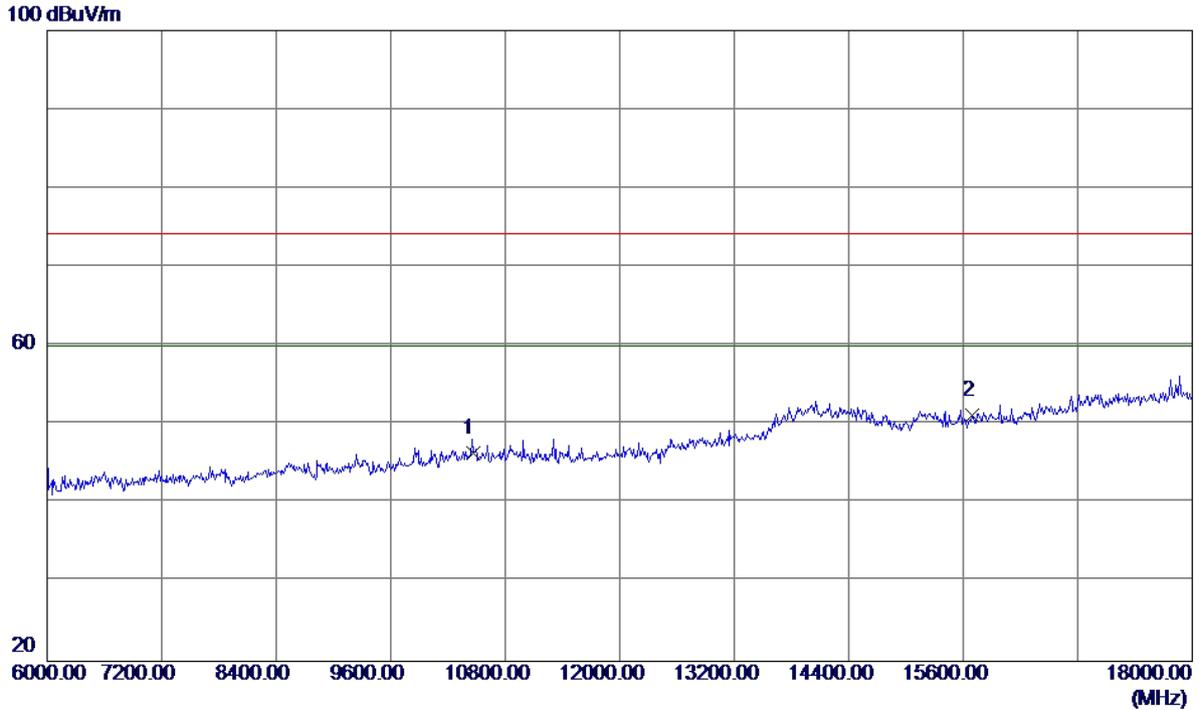


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10460.0000	30.97	15.49	46.46	74.20	-27.74	Peak	
2 *	15690.0000	32.34	18.88	51.22	74.20	-22.98	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

**Horizontal**

100 dBuV/m

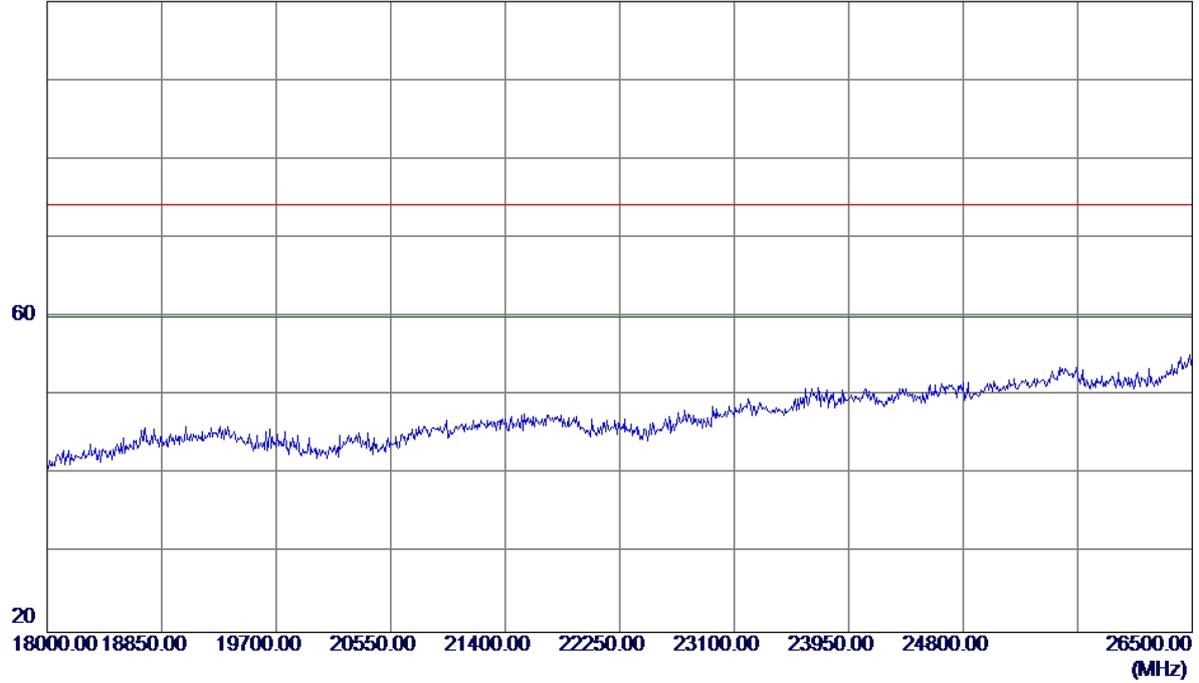


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------



Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


**Vertical**

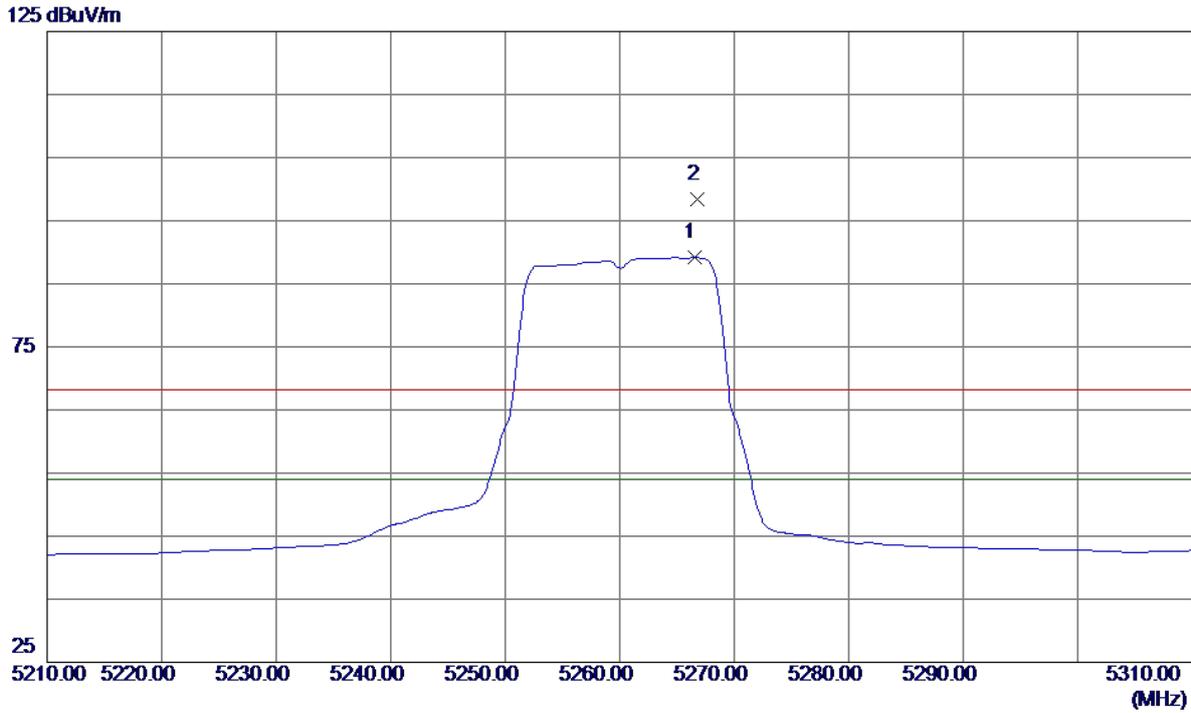

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5266.5000	48.12	41.01	89.13	54.00	35.13	AVG	No Limit
2	5266.8000	57.42	41.01	98.43	68.30	30.13	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

**Vertical**

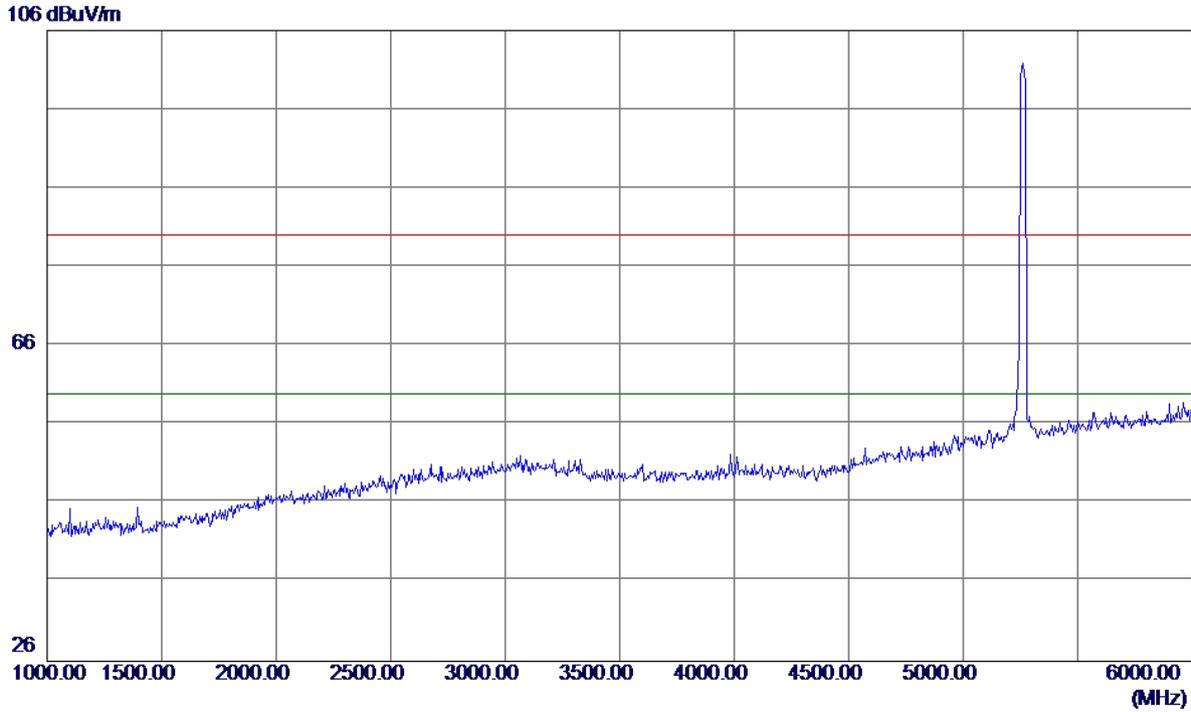


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

**Vertical**

100 dBuV/m

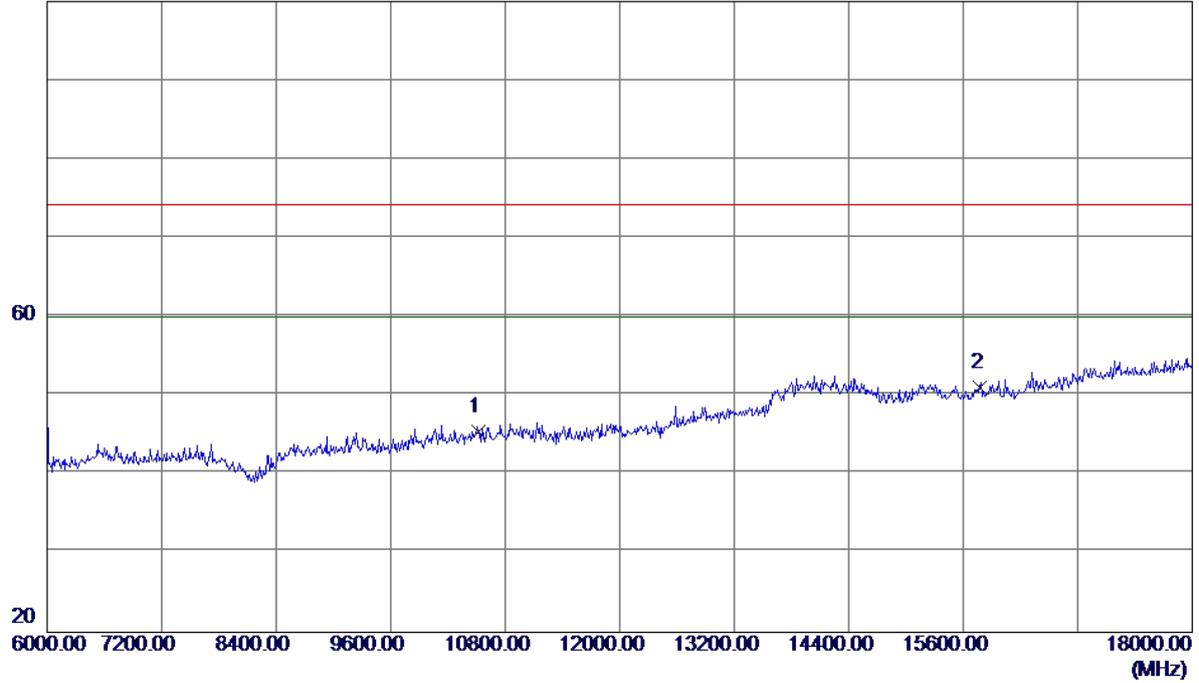


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10520.0000	29.85	15.62	45.47	74.20	-28.73	Peak	
2 *	15780.0000	32.20	18.88	51.08	74.20	-23.12	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

**Vertical**


100 dBuV/m

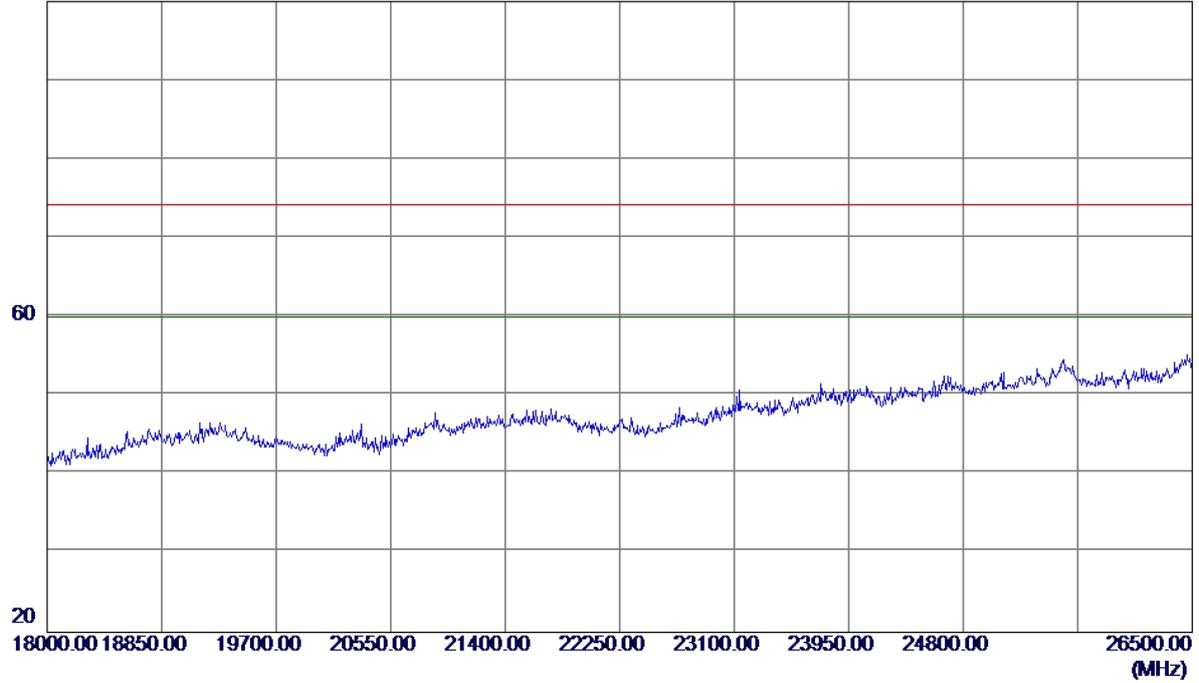

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

**Vertical**

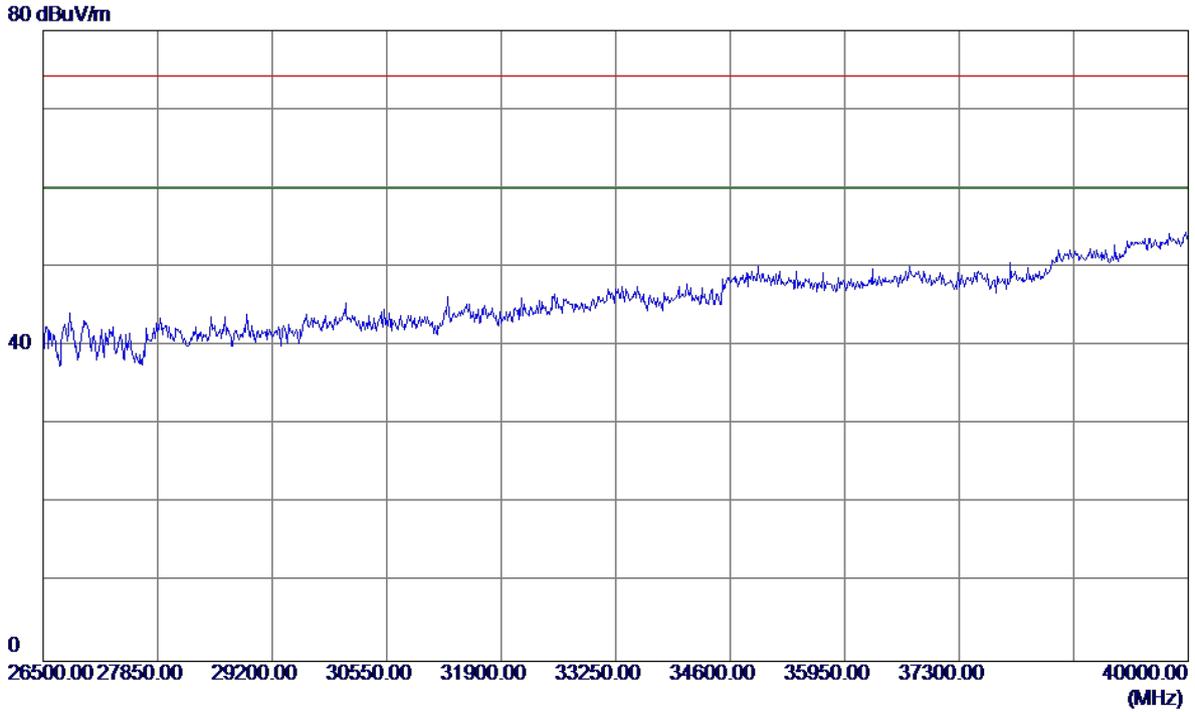


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

**Horizontal**


125 dBuV/m

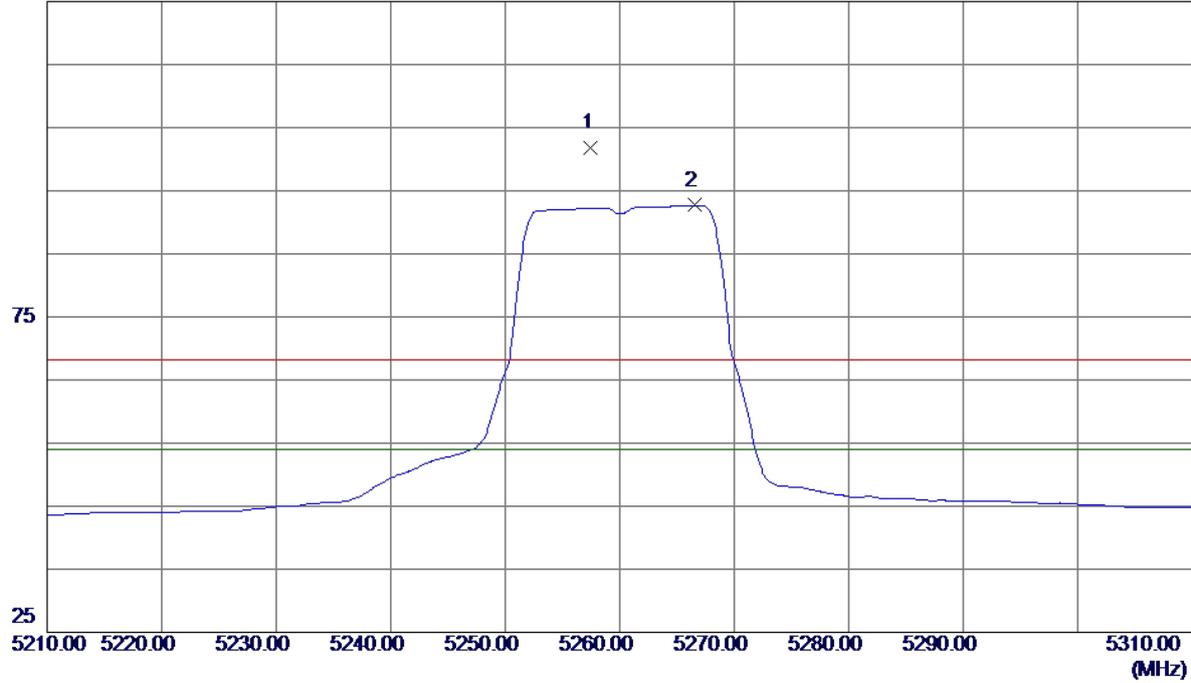

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5257.5000	60.75	40.98	101.73	68.30	33.43	Peak	No Limit
2 *	5266.6000	51.69	41.01	92.70	54.00	38.70	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

**Horizontal**

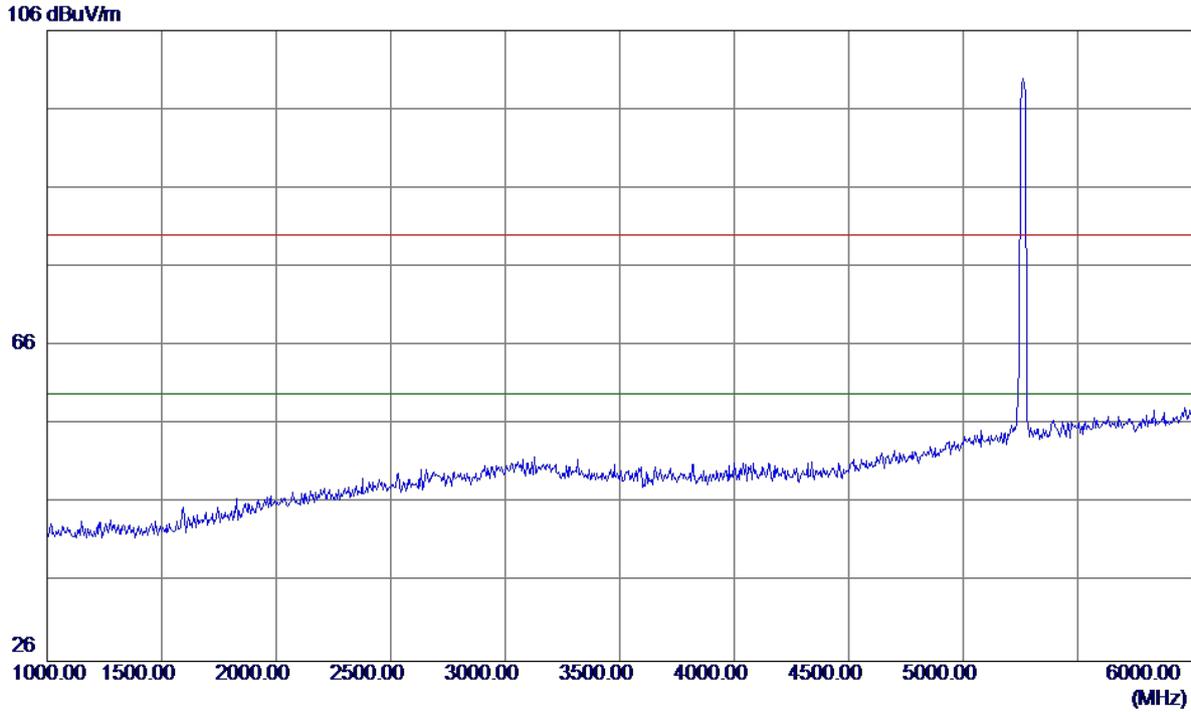


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
	5260	106		106	66	40		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

**Horizontal**

100 dBuV/m

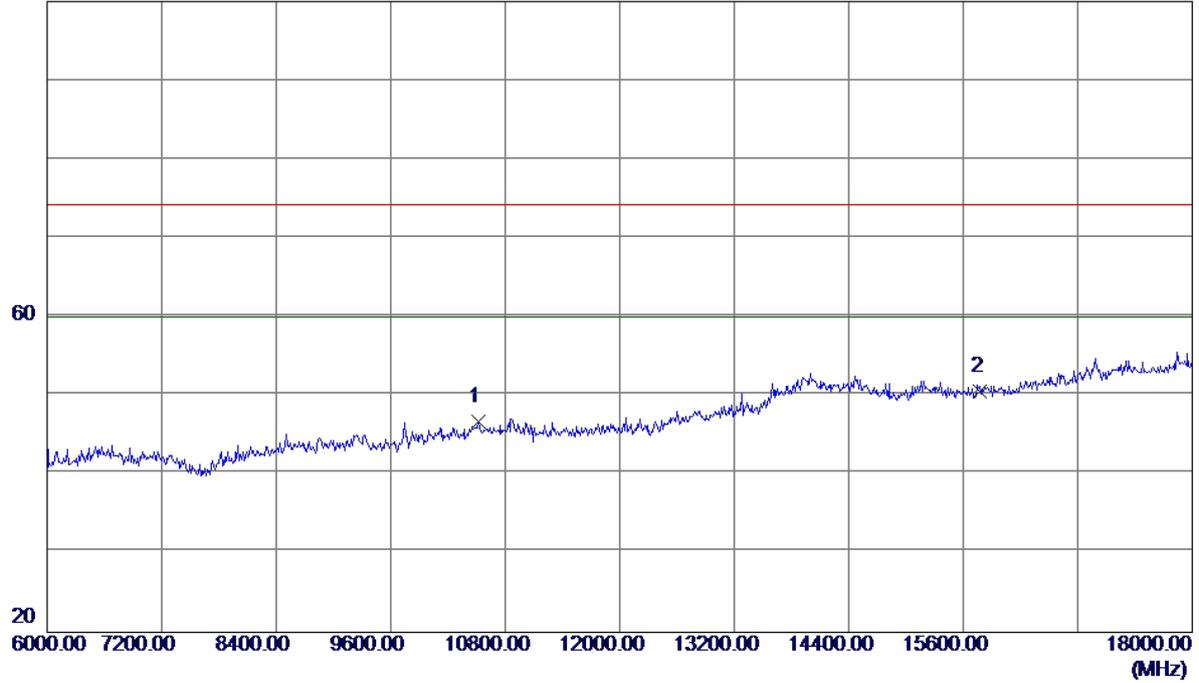


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10520.0000	31.17	15.62	46.79	74.20	-27.41	Peak	
2 *	15780.0000	31.72	18.88	50.60	74.20	-23.60	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

**Horizontal**

100 dBuV/m

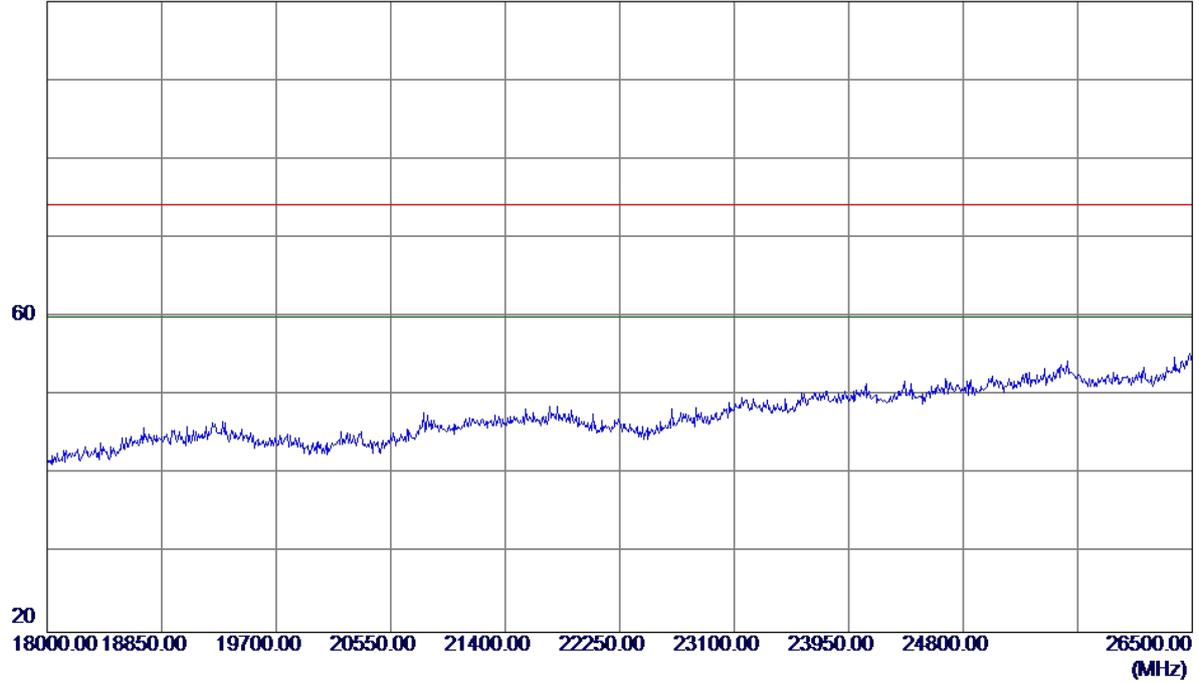


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------



Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

**Vertical**


125 dBuV/m

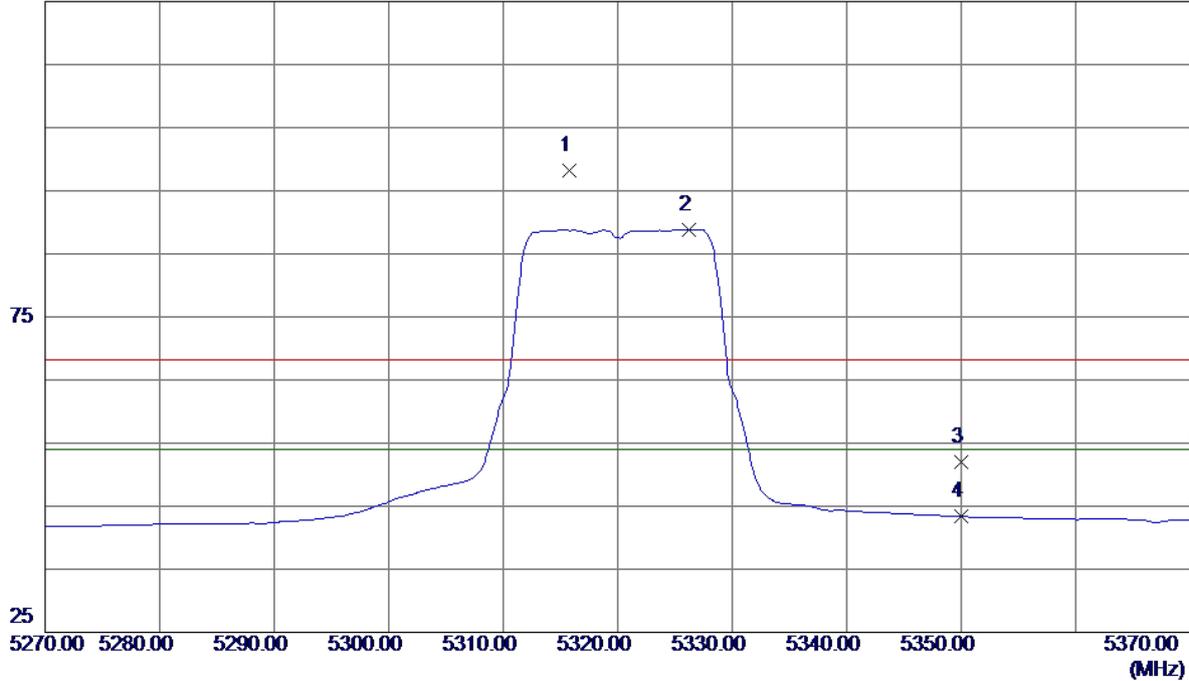

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5315.8000	57.02	41.17	98.19	68.30	29.89	Peak	No Limit
2 *	5326.2000	47.66	41.21	88.87	54.00	34.87	AVG	No Limit
3	5350.0000	10.68	41.28	51.96	68.30	-16.34	Peak	
4	5350.0000	2.05	41.28	43.33	54.00	-10.67	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


**Vertical**

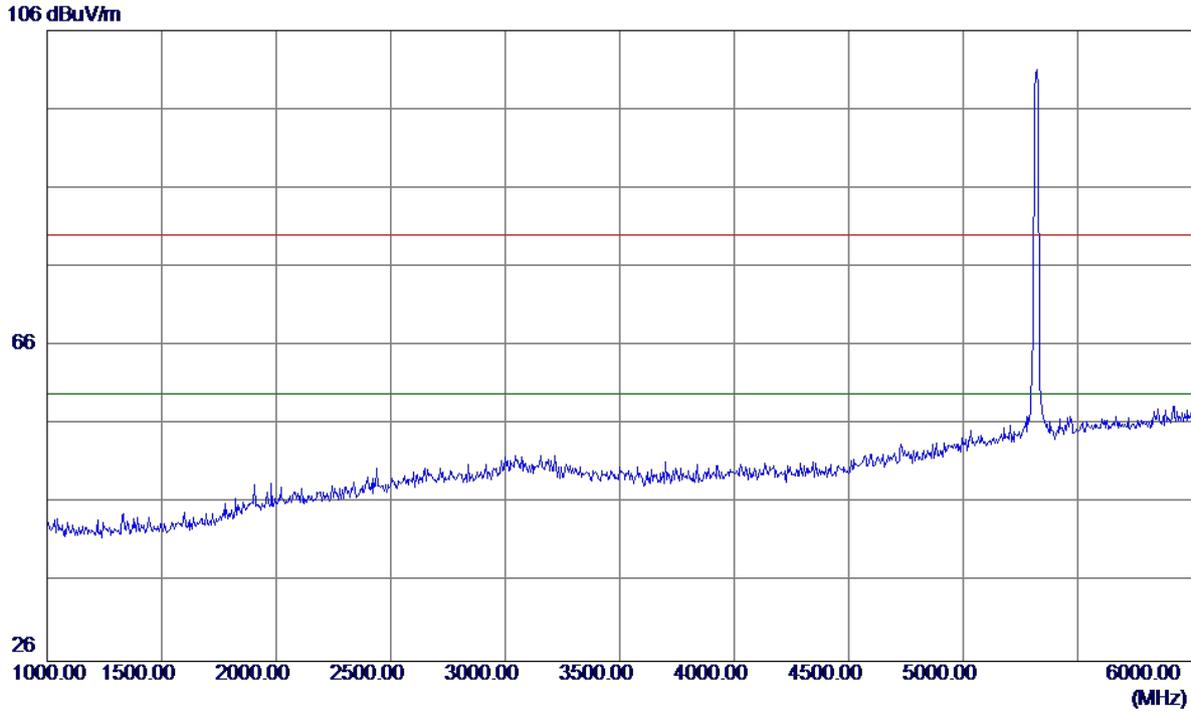

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

**Vertical**

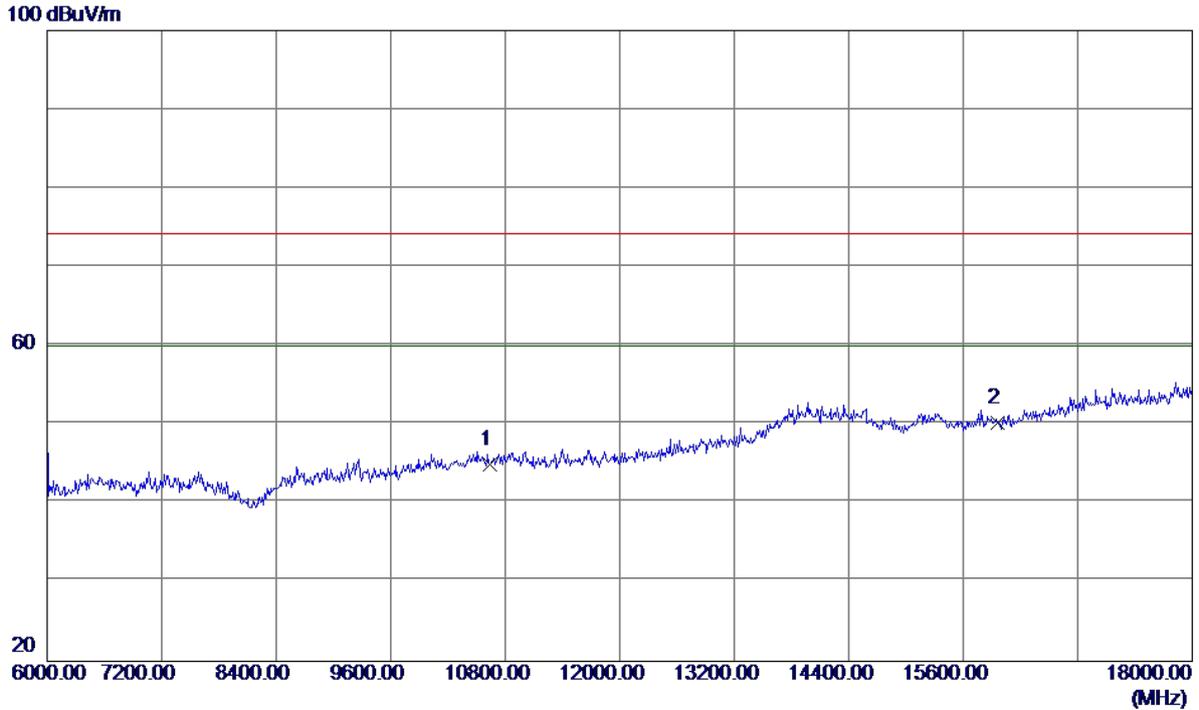


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	29.13	15.80	44.93	74.20	-29.27	Peak	
2 *	15960.0000	31.35	18.89	50.24	74.20	-23.96	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

**Vertical**

100 dBuV/m

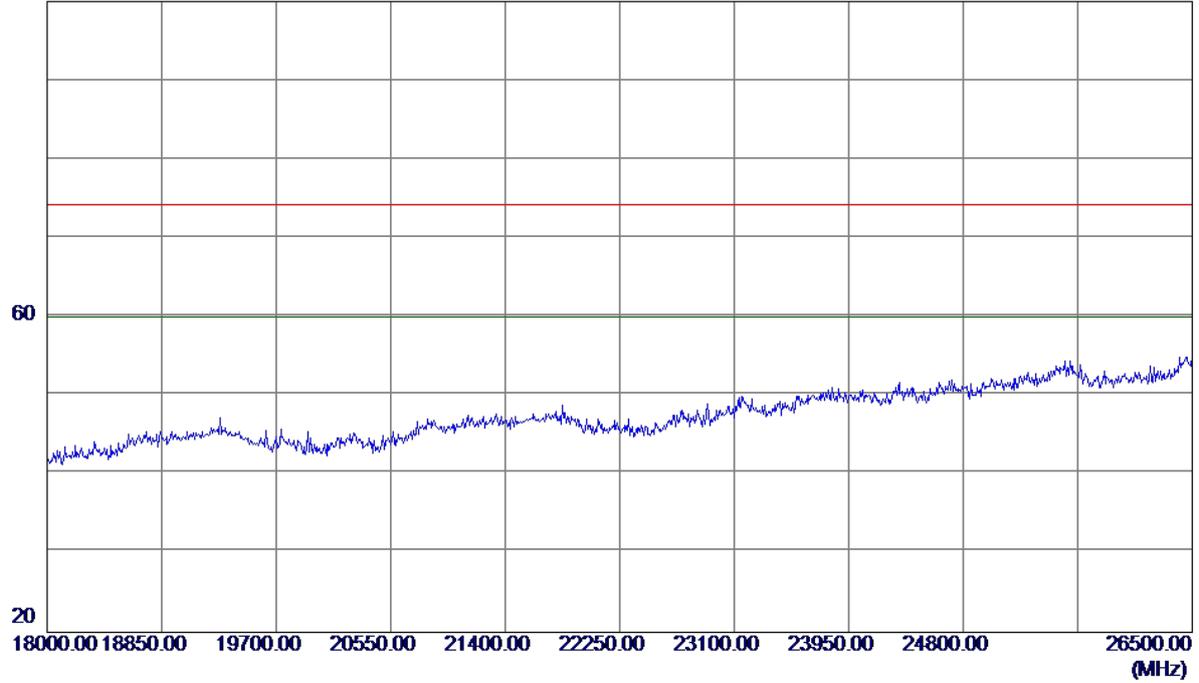


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment



Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


**Horizontal**

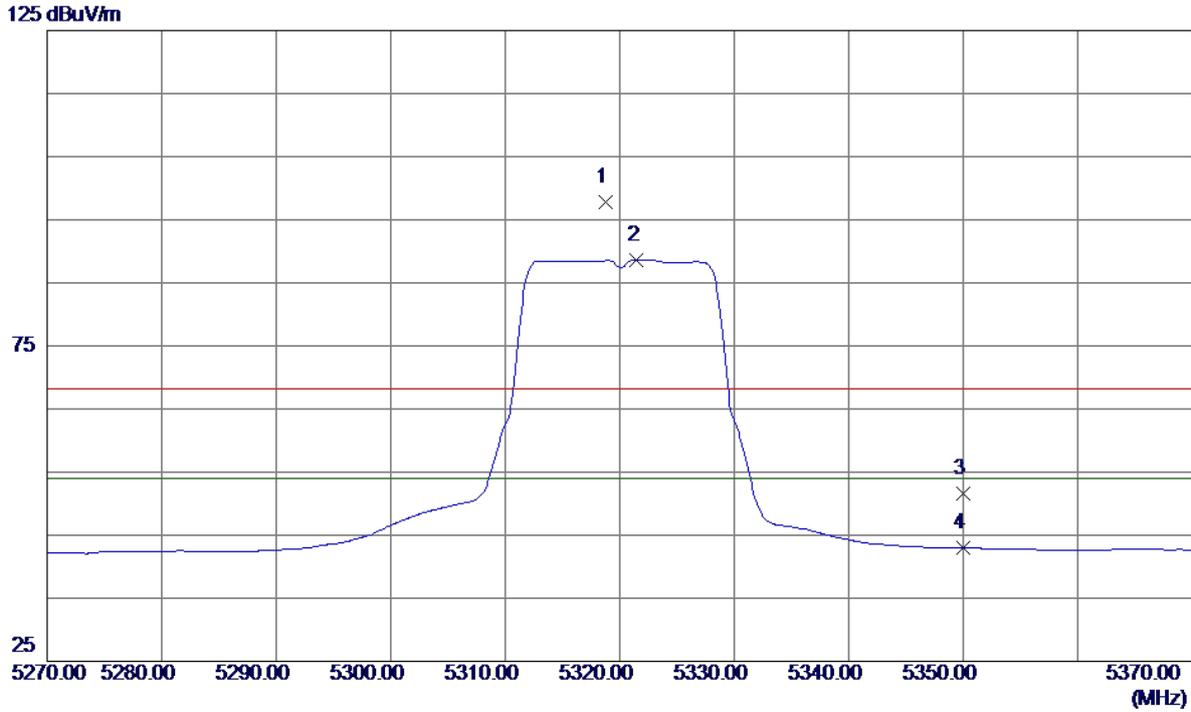

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5318.8000	56.58	41.18	97.76	68.30	29.46	Peak	No Limit
2 *	5321.5000	47.47	41.19	88.66	54.00	34.66	AVG	No Limit
3	5350.0000	10.35	41.28	51.63	68.30	-16.67	Peak	
4	5350.0000	1.63	41.28	42.91	54.00	-11.09	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


**Horizontal**

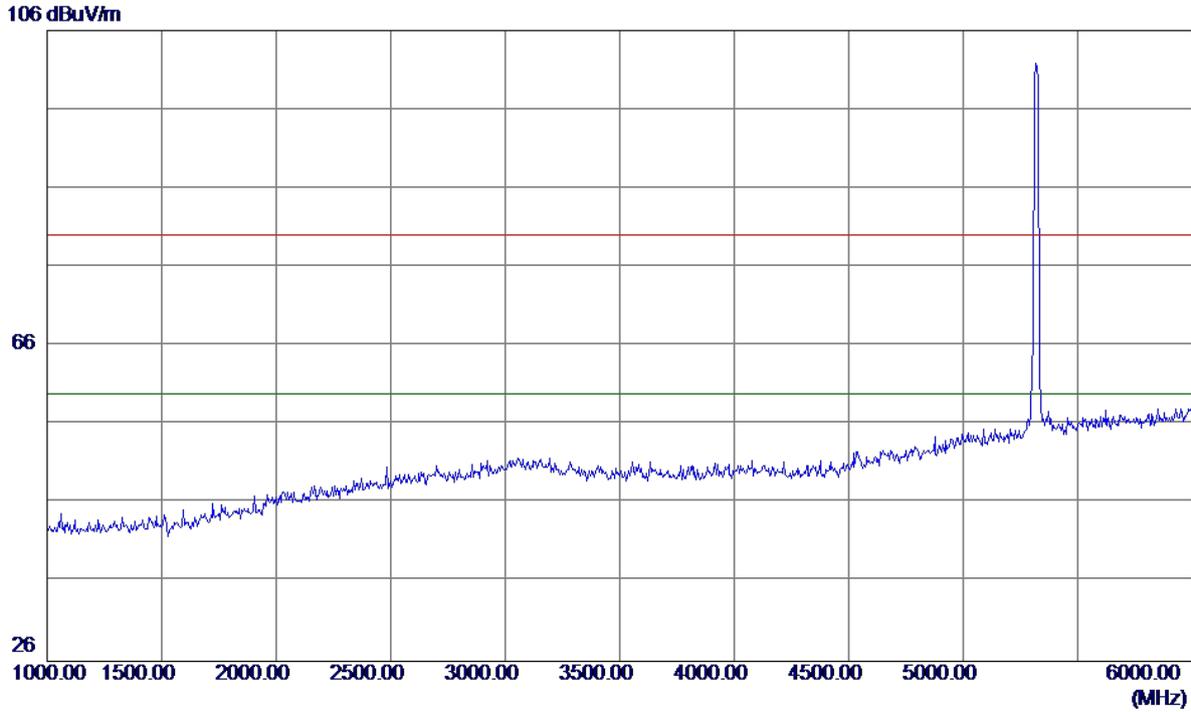

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

**Horizontal**

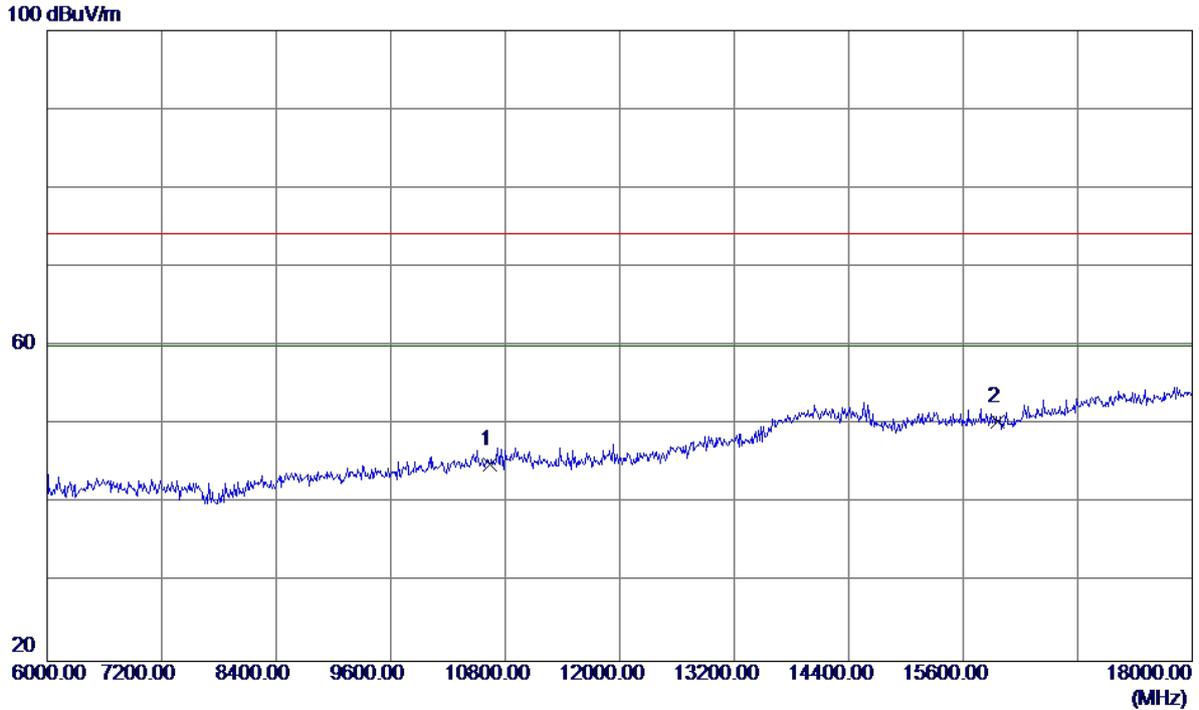


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	29.14	15.80	44.94	74.20	-29.26	Peak	
2 *	15960.0000	31.54	18.89	50.43	74.20	-23.77	Peak	



Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

**Horizontal**

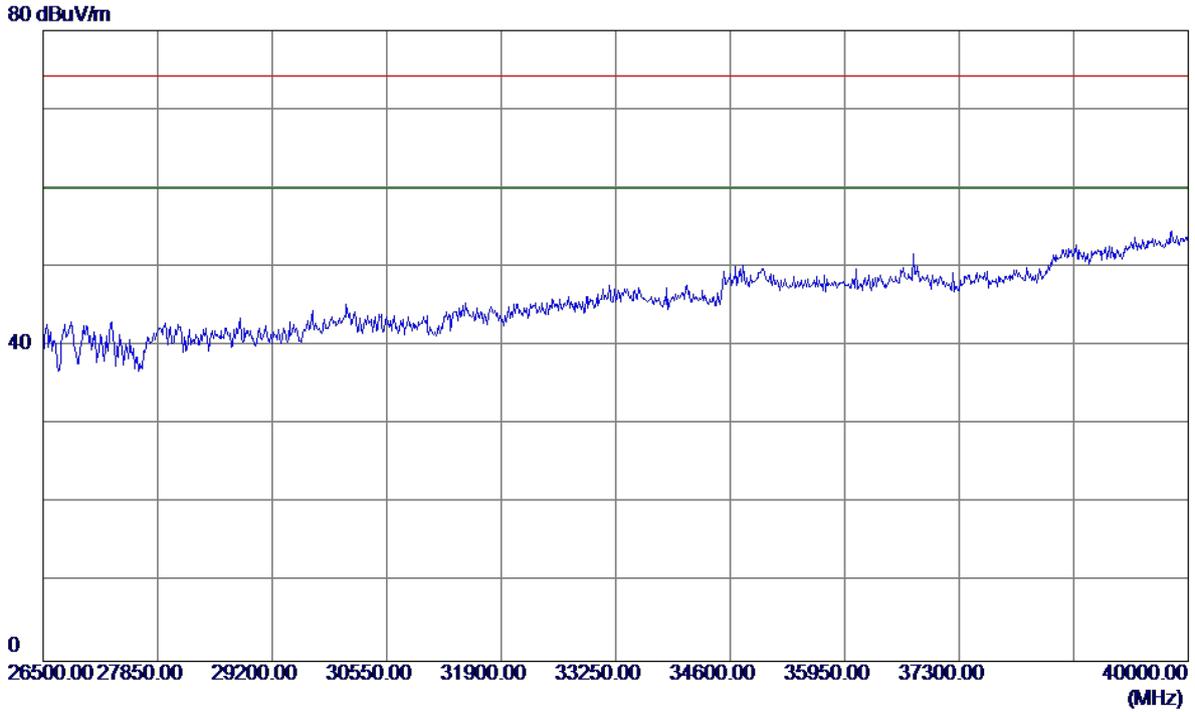


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

**Vertical**


125 dBuV/m

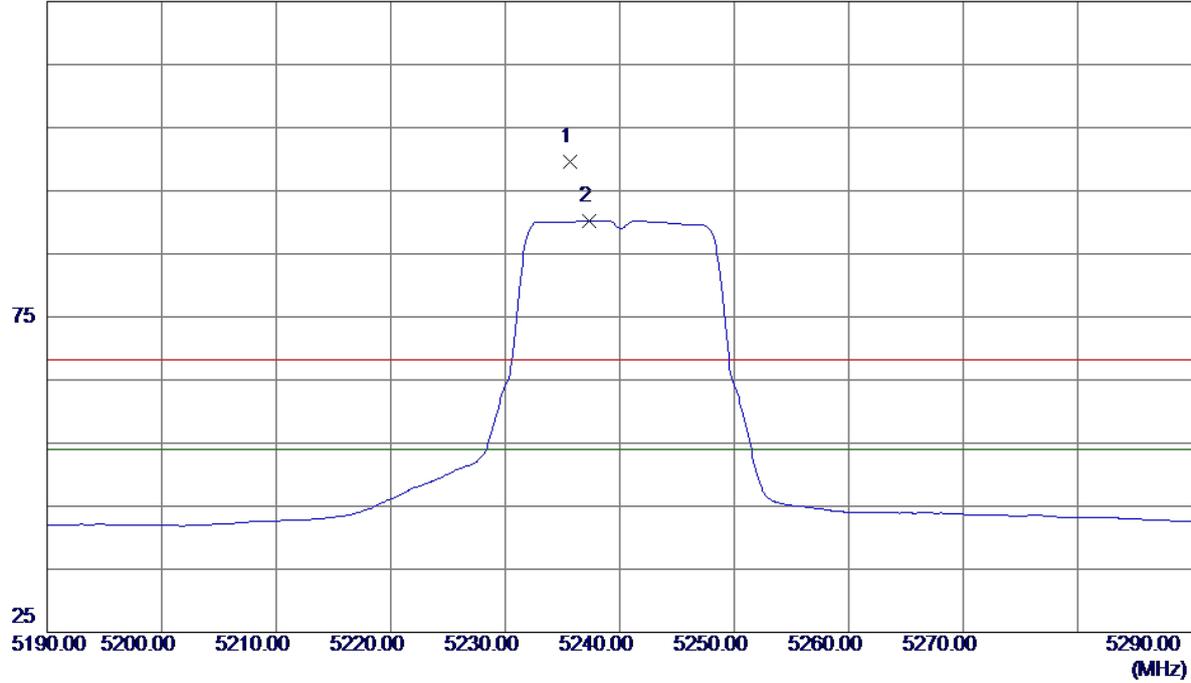

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5235.7000	58.68	40.91	99.59	68.30	31.29	Peak	No Limit
2 *	5237.3000	49.34	40.91	90.25	54.00	36.25	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


**Vertical**

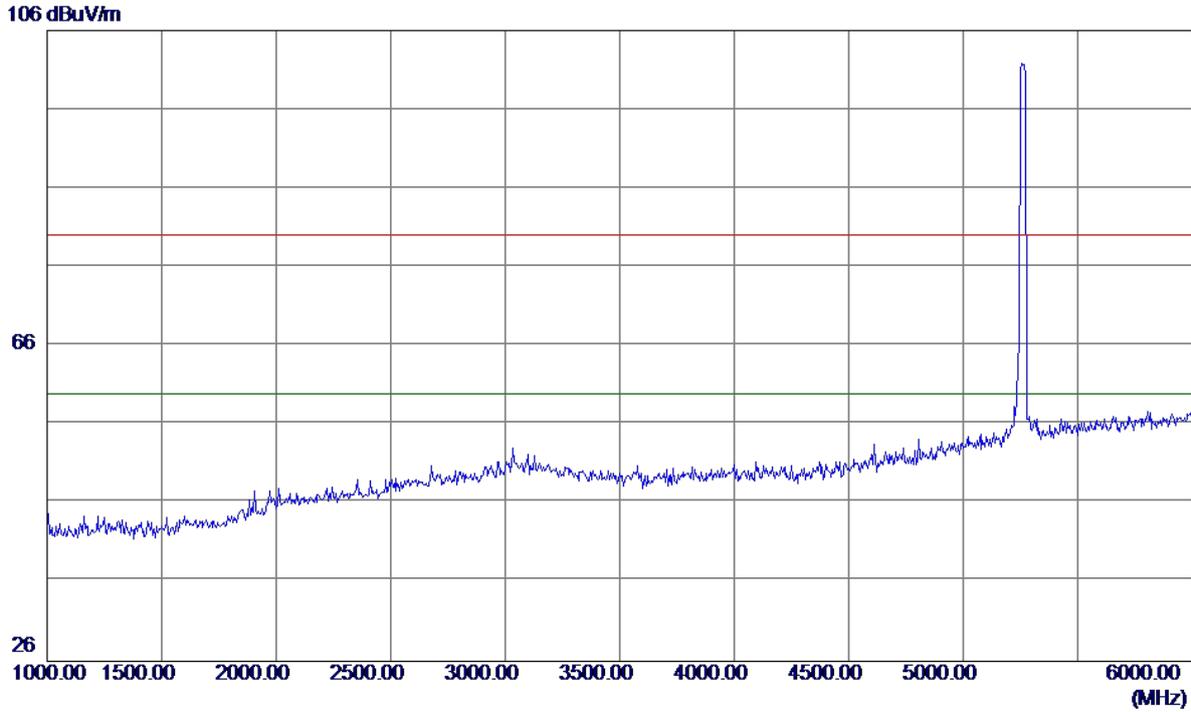

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

**Vertical**

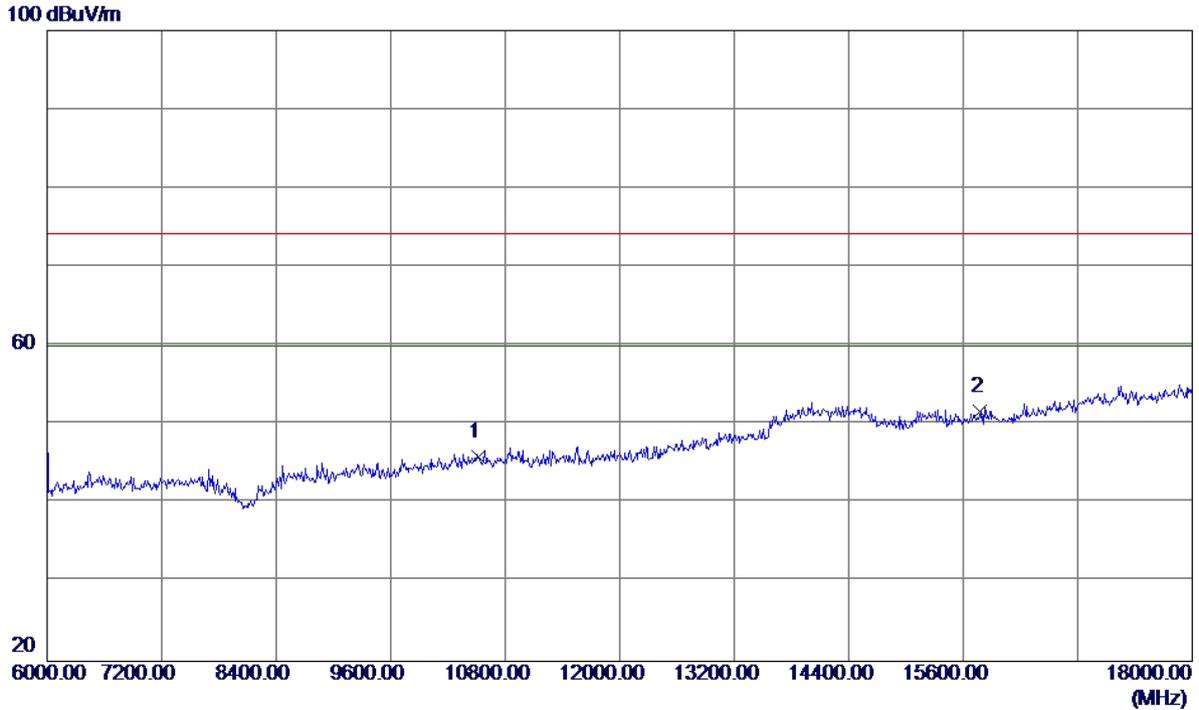

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10520.0000	30.32	15.62	45.94	74.20	-28.26	Peak	
2 *	15780.0000	32.77	18.88	51.65	74.20	-22.55	Peak	






Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

**Horizontal**


125 dBuV/m

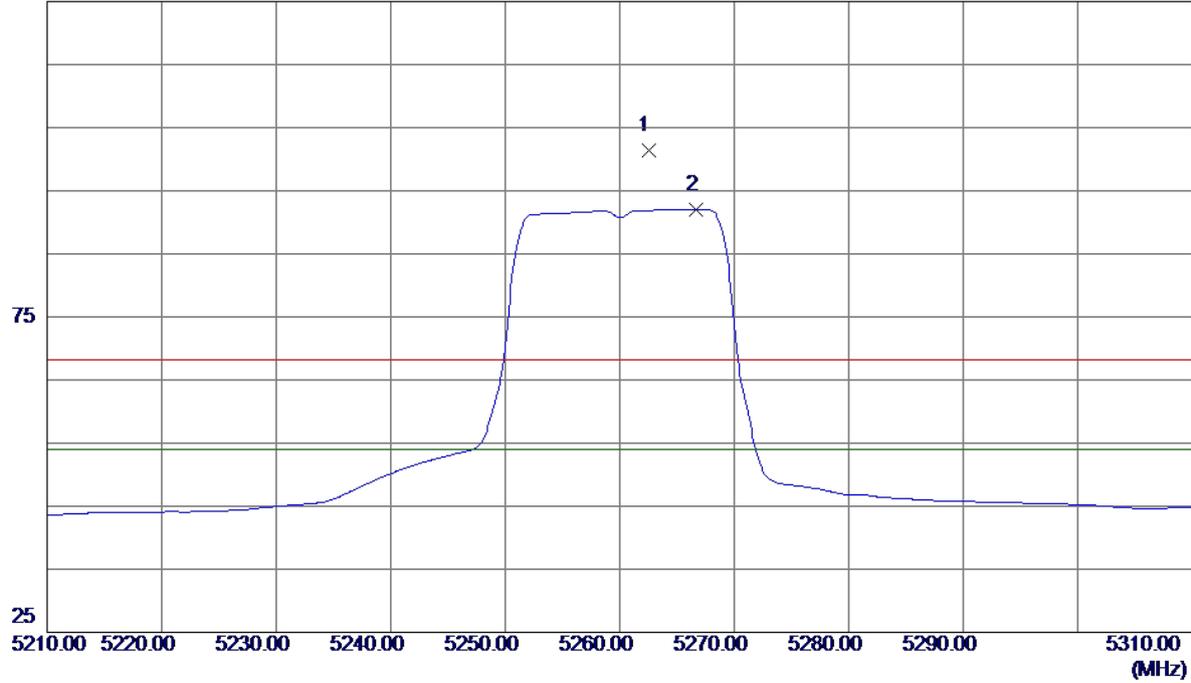

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5262.5000	60.44	41.00	101.44	68.30	33.14	Peak	No Limit
2 *	5266.7000	51.01	41.01	92.02	54.00	38.02	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

**Horizontal**

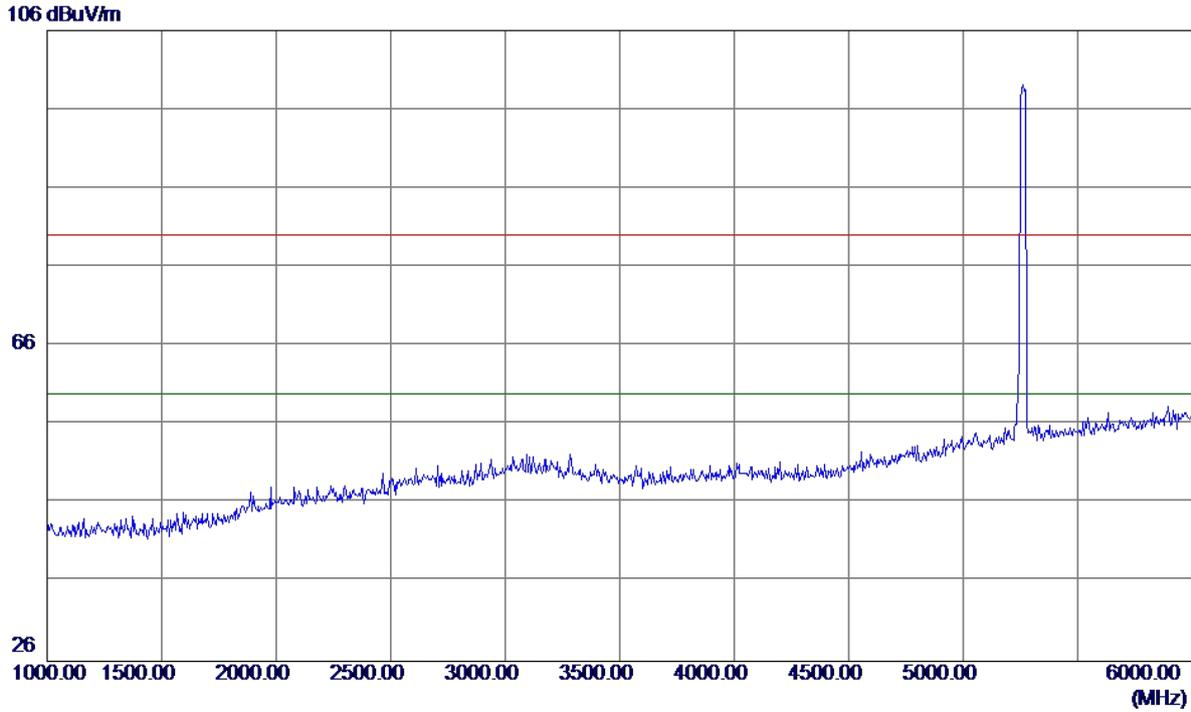


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

**Horizontal**

100 dBuV/m

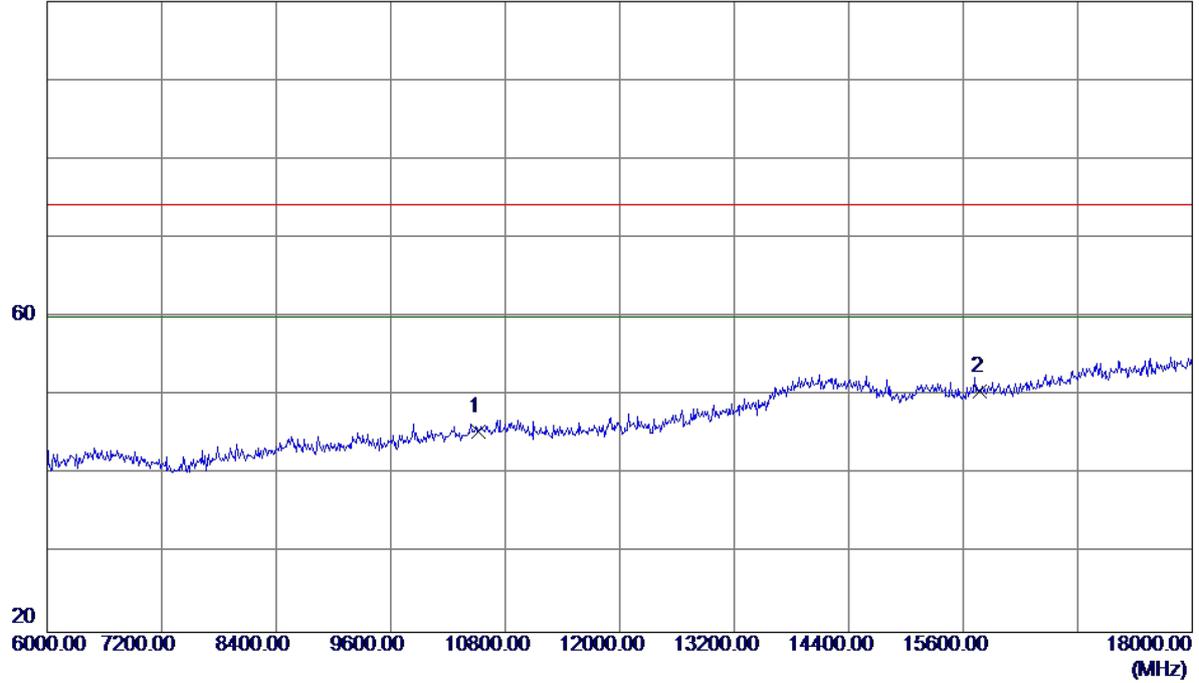


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10520.0000	29.86	15.62	45.48	74.20	-28.72	Peak	
2 *	15780.0000	31.72	18.88	50.60	74.20	-23.60	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

**Horizontal**


100 dBuV/m

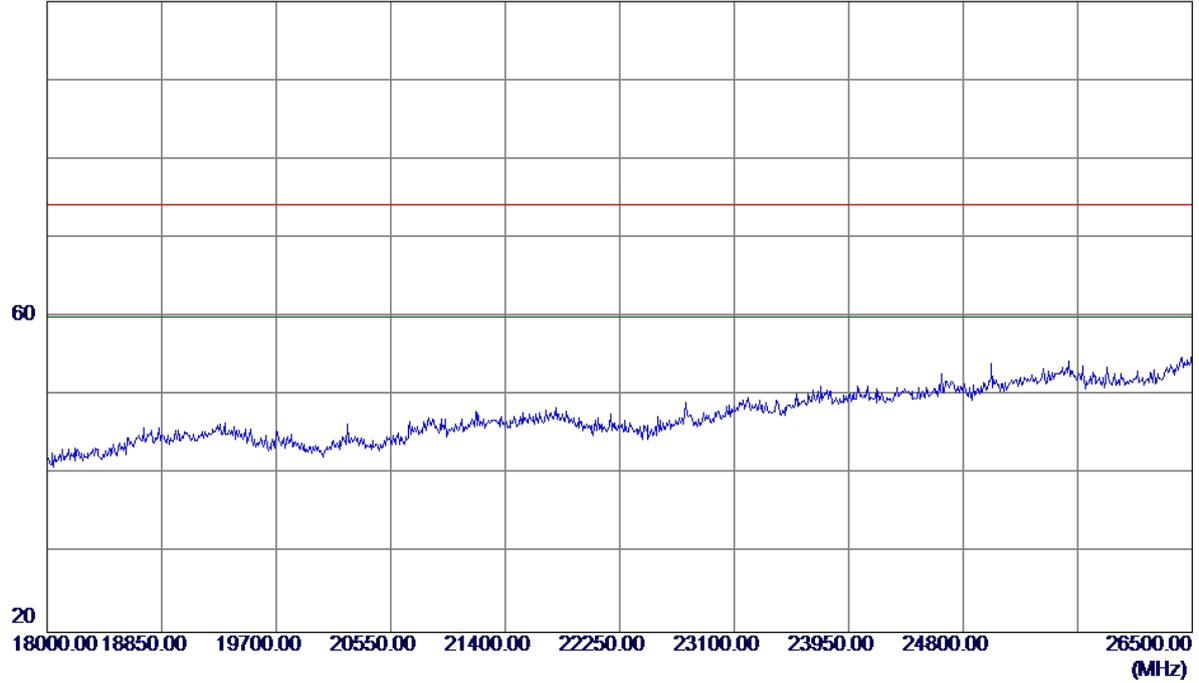

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

**Horizontal**

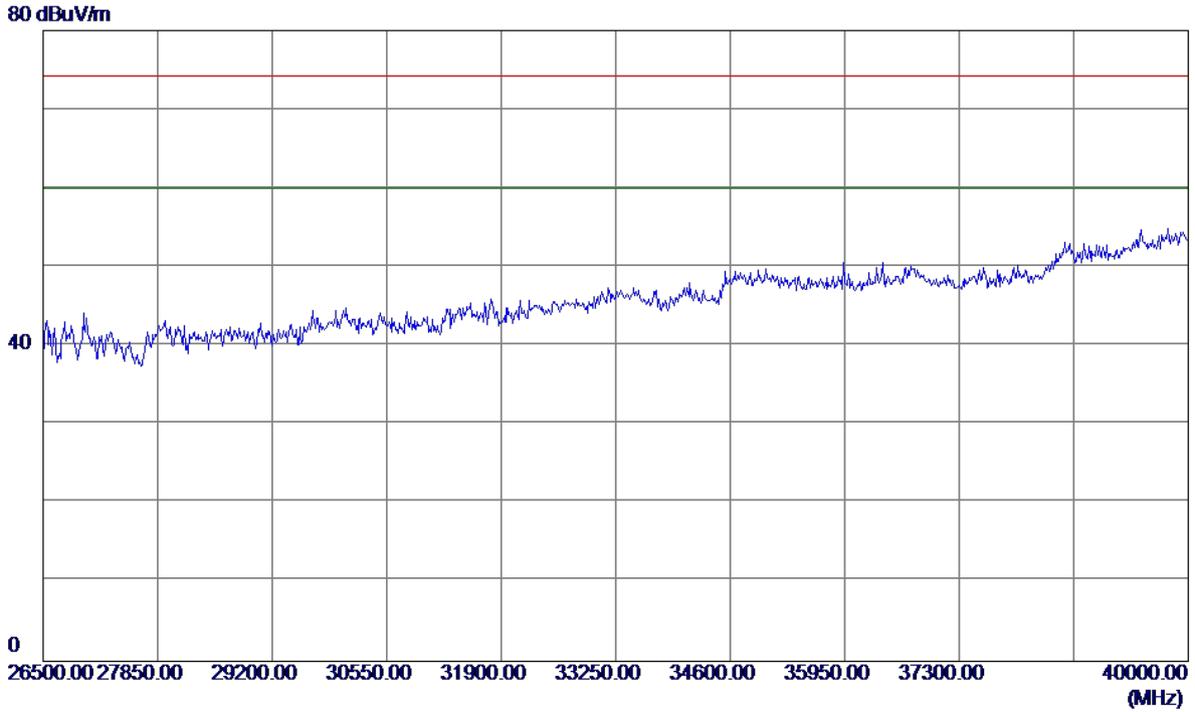


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

**Vertical**


125 dBuV/m

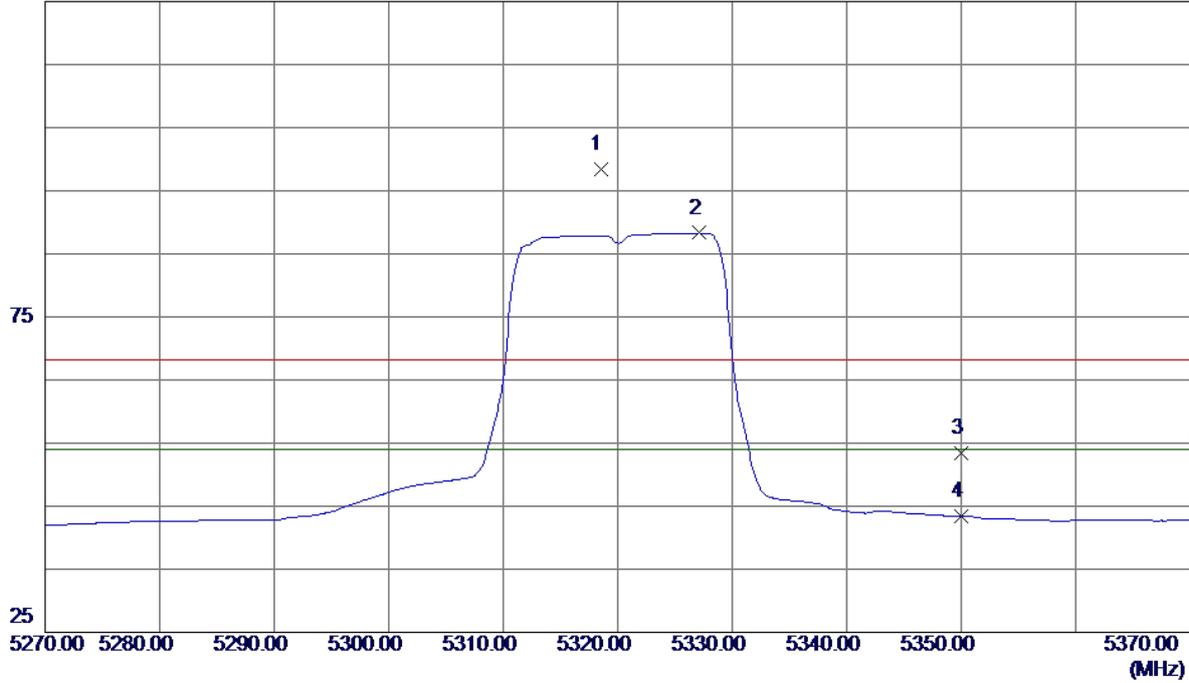

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5318.5000	57.13	41.18	98.31	68.30	30.01	Peak	No Limit
2 *	5327.1000	47.09	41.21	88.30	54.00	34.30	AVG	No Limit
3	5350.0000	12.10	41.28	53.38	68.30	-14.92	Peak	
4	5350.0000	2.11	41.28	43.39	54.00	-10.61	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

**Vertical**

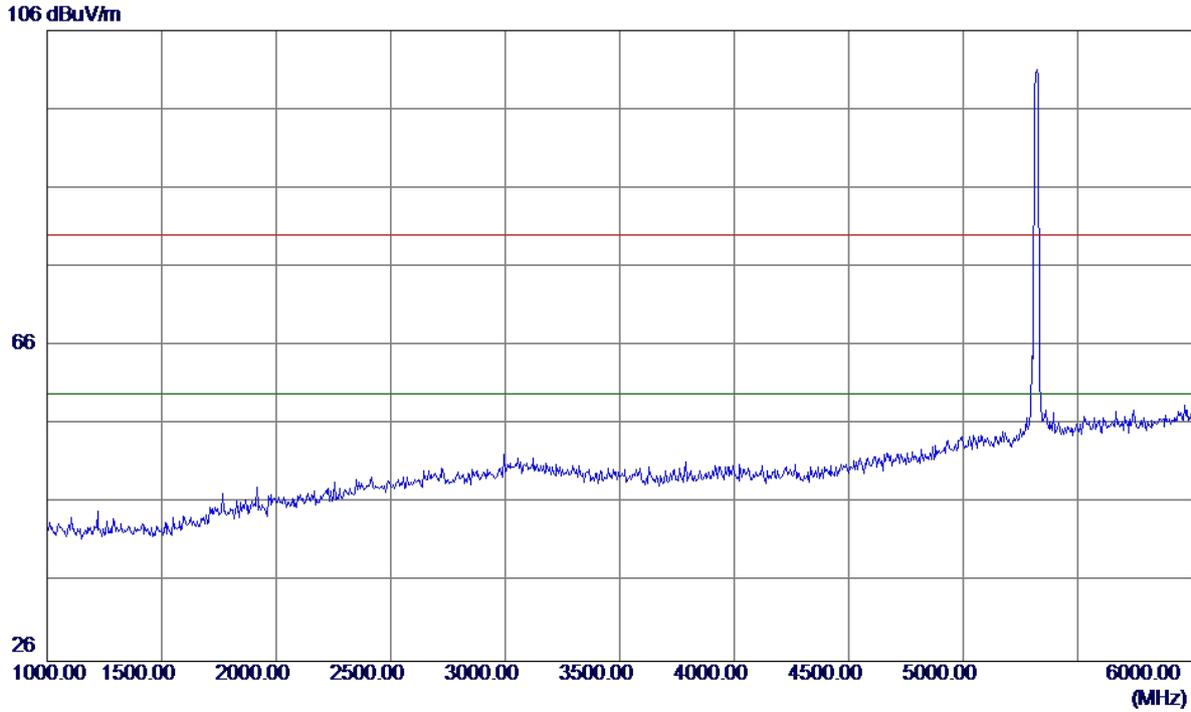


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

**Vertical**

100 dBuV/m

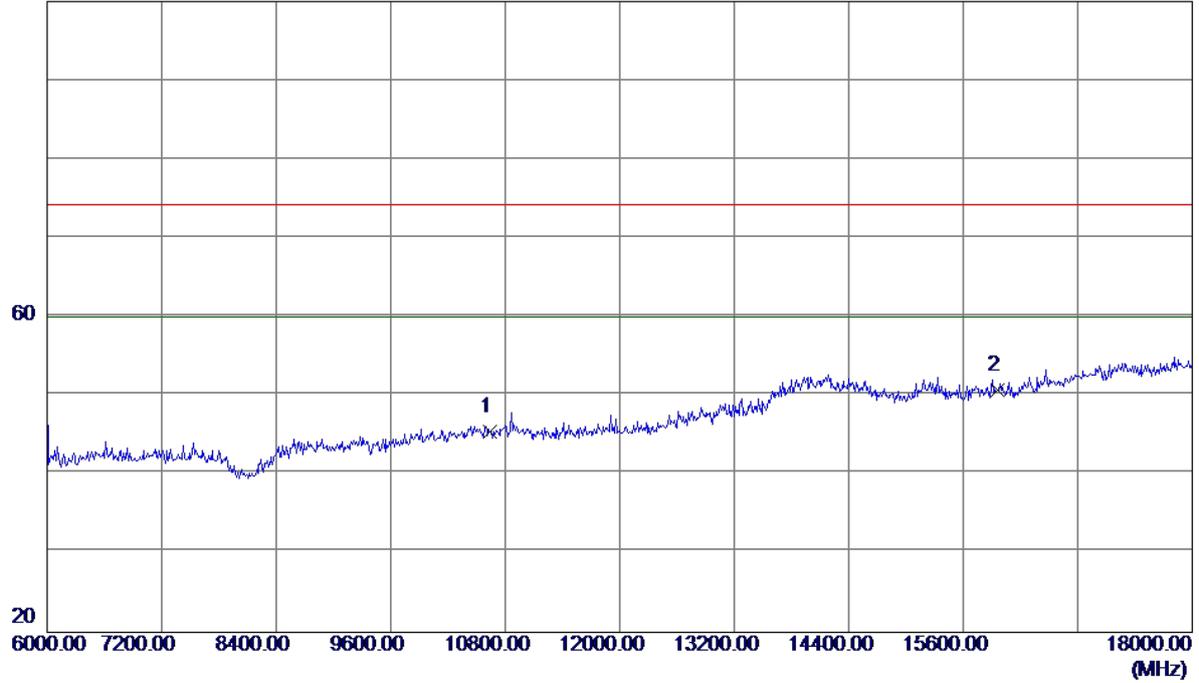


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	29.57	15.80	45.37	74.20	-28.83	Peak	
2 *	15960.0000	31.87	18.89	50.76	74.20	-23.44	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

**Vertical**

100 dBuV/m

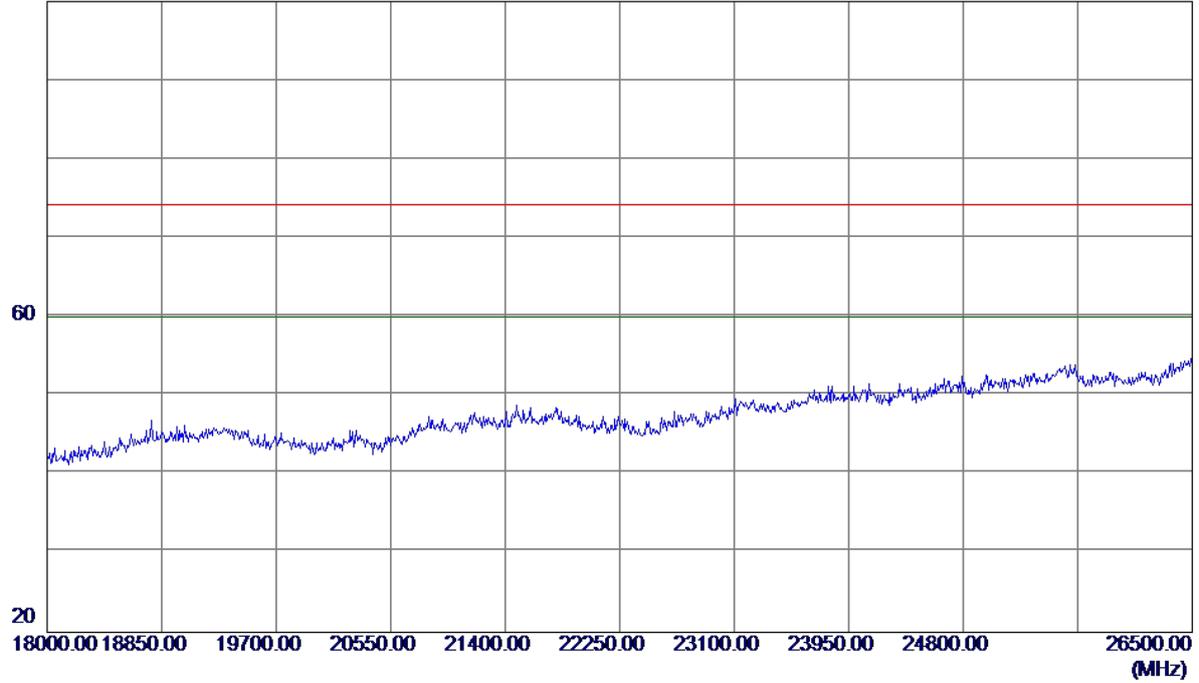


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment



Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

**Horizontal**


125 dBuV/m

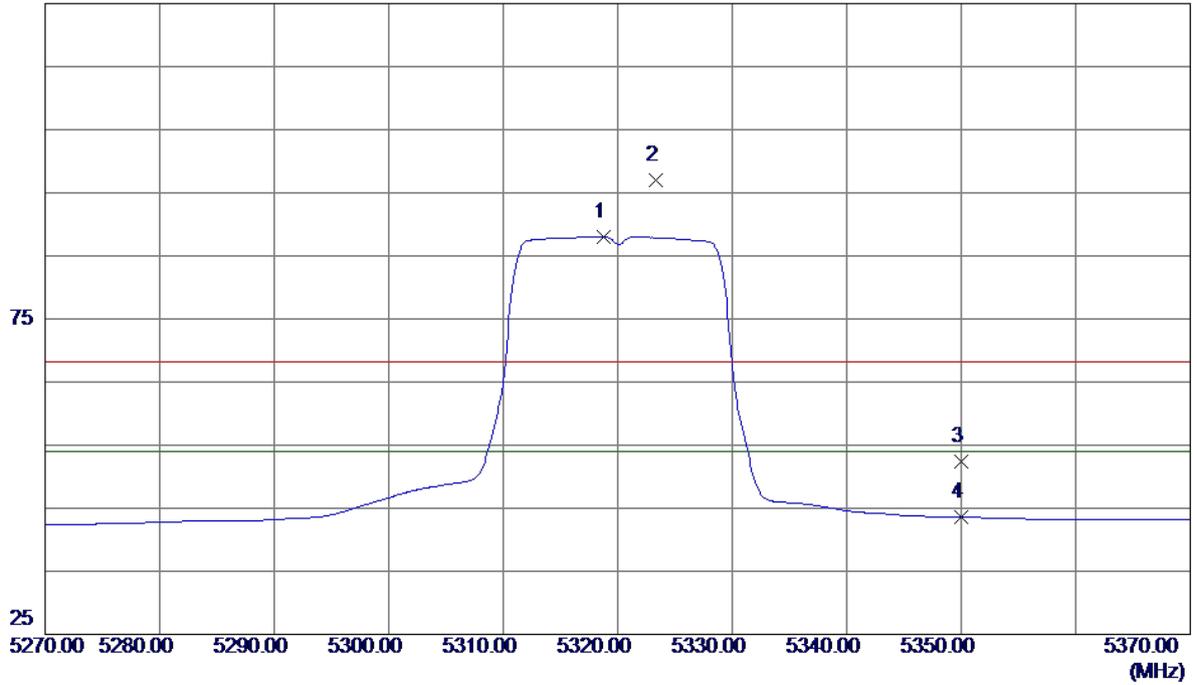

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5318.8000	46.83	41.18	88.01	54.00	34.01	AVG	No Limit
2	5323.3000	55.82	41.20	97.02	68.30	28.72	Peak	No Limit
3	5350.0000	11.11	41.28	52.39	68.30	-15.91	Peak	
4	5350.0000	2.26	41.28	43.54	54.00	-10.46	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

**Horizontal**

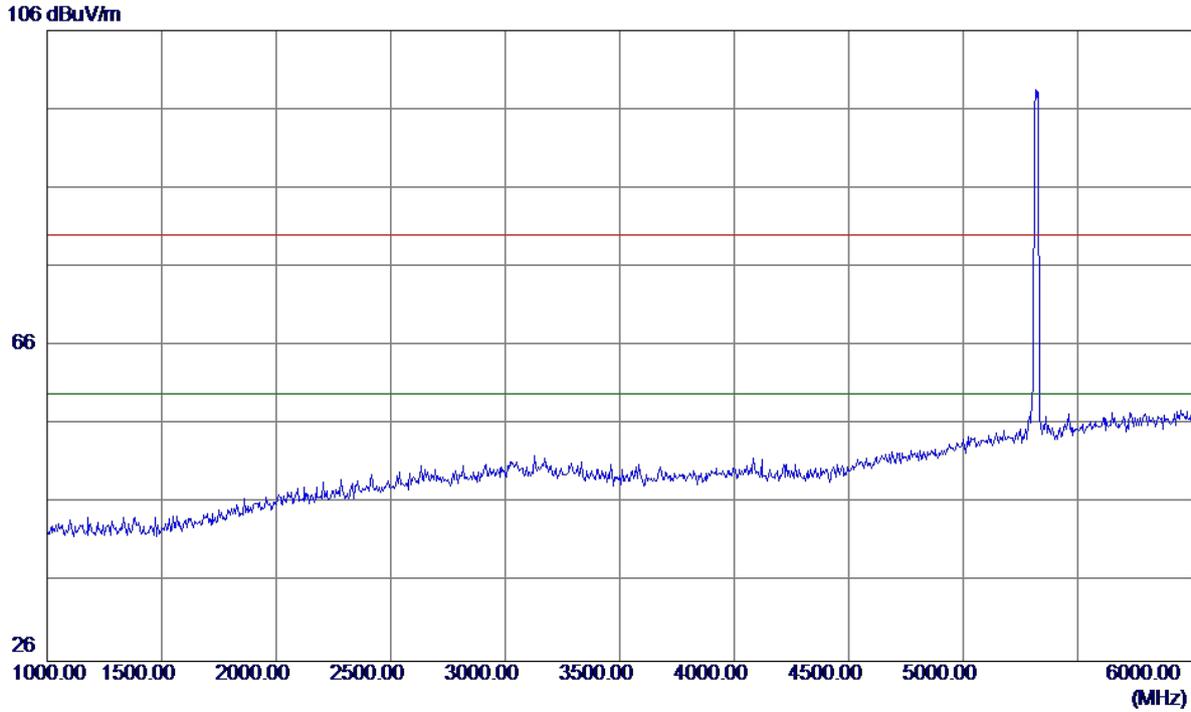


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

**Horizontal**

100 dBuV/m

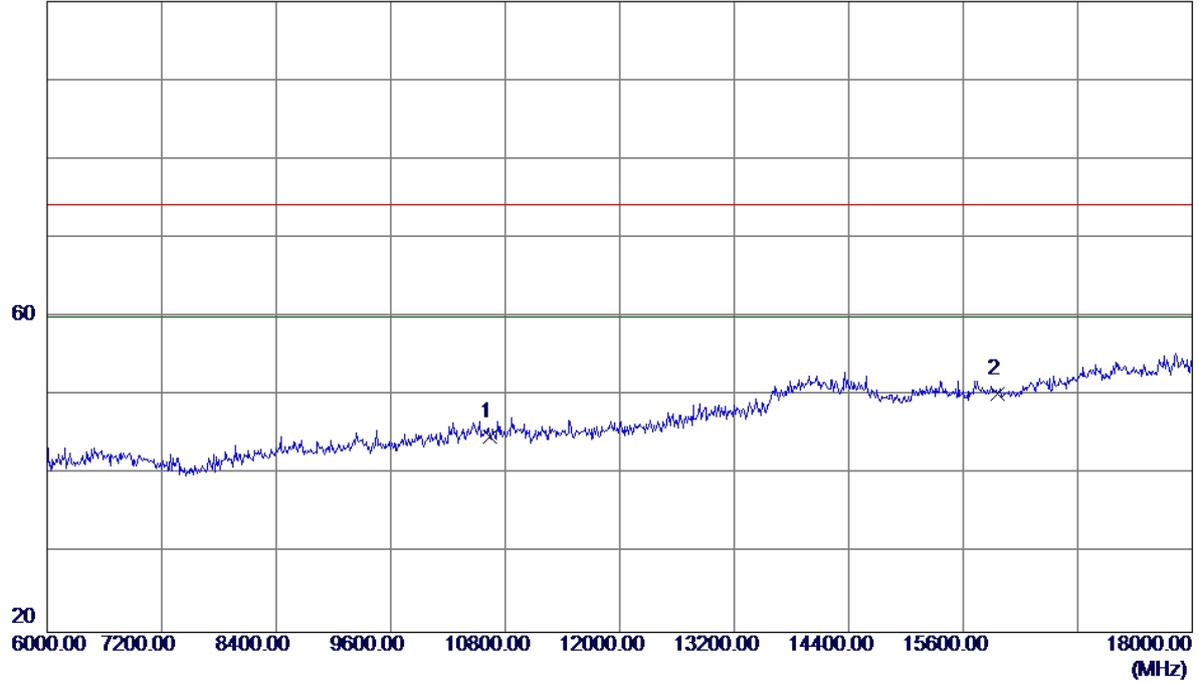


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	29.07	15.80	44.87	74.20	-29.33	Peak	
2 *	15960.0000	31.40	18.89	50.29	74.20	-23.91	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

**Horizontal**

100 dBuV/m

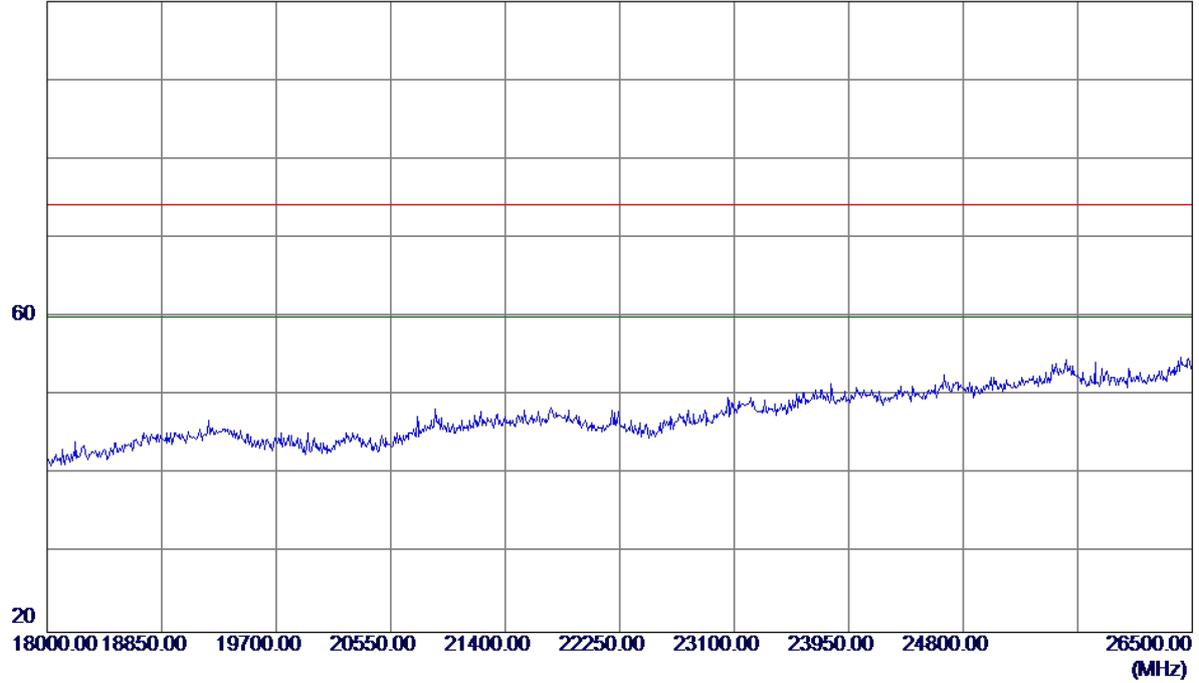


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment



Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

**Vertical**


125 dBuV/m

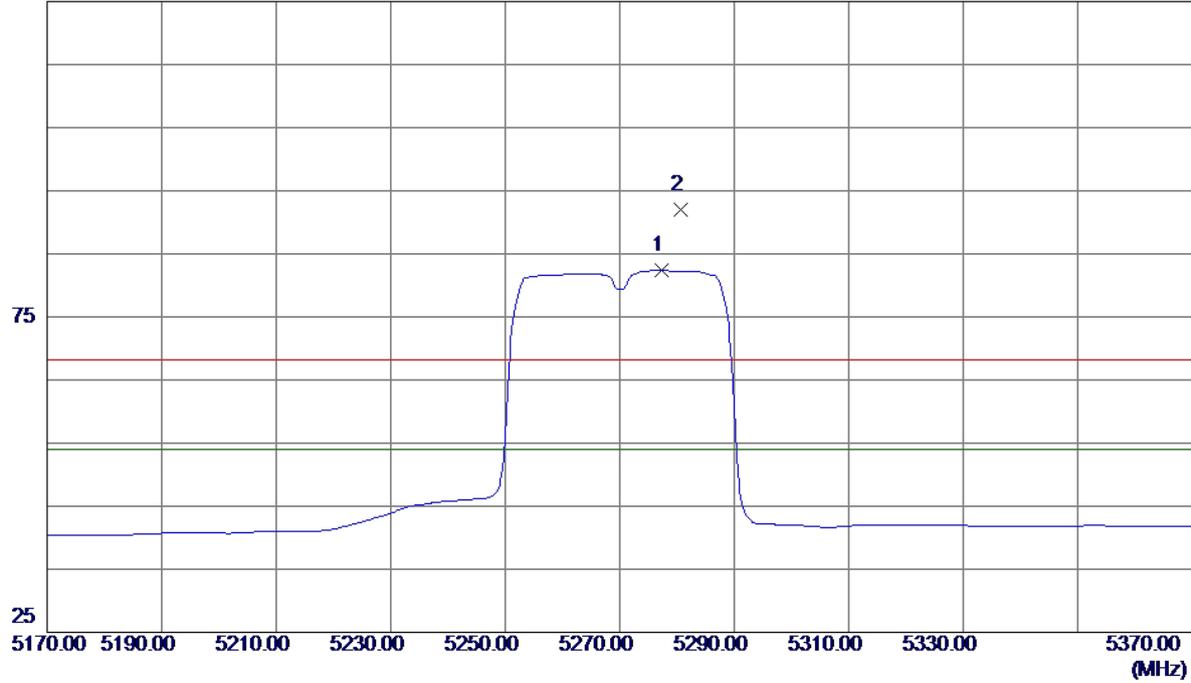

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5277.4000	41.32	41.05	82.37	54.00	28.37	AVG	No Limit
2	5280.6000	50.88	41.06	91.94	68.30	23.64	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


**Vertical**

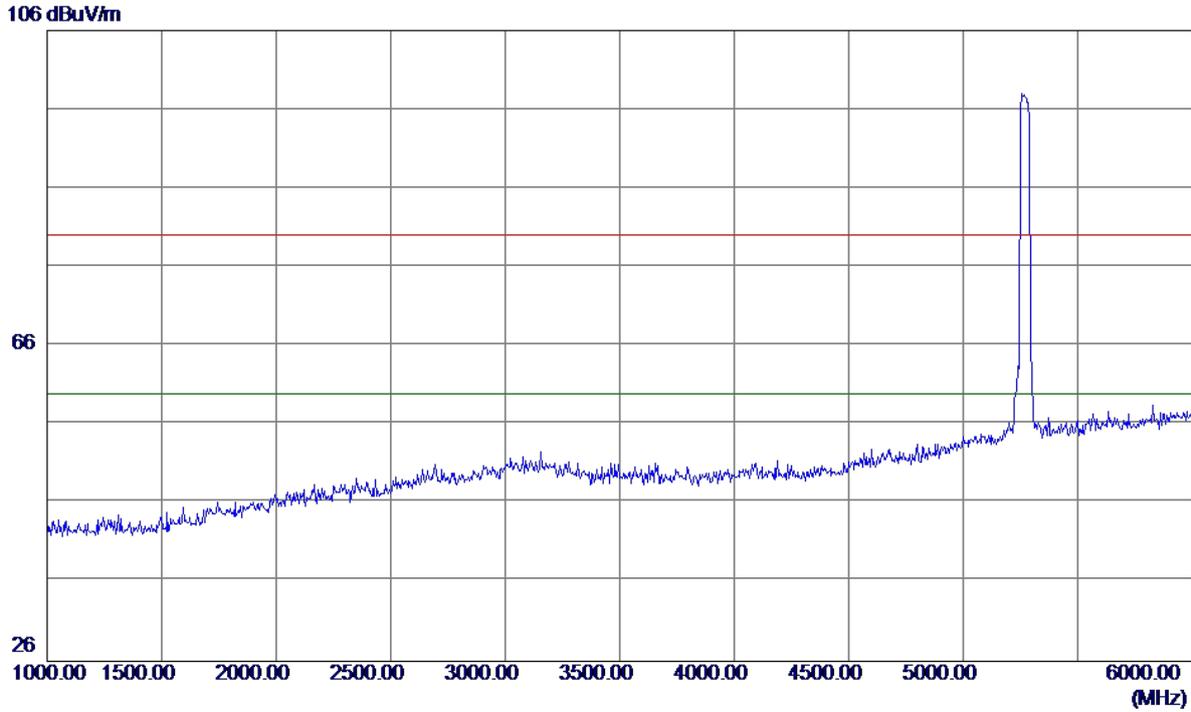

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

**Vertical**

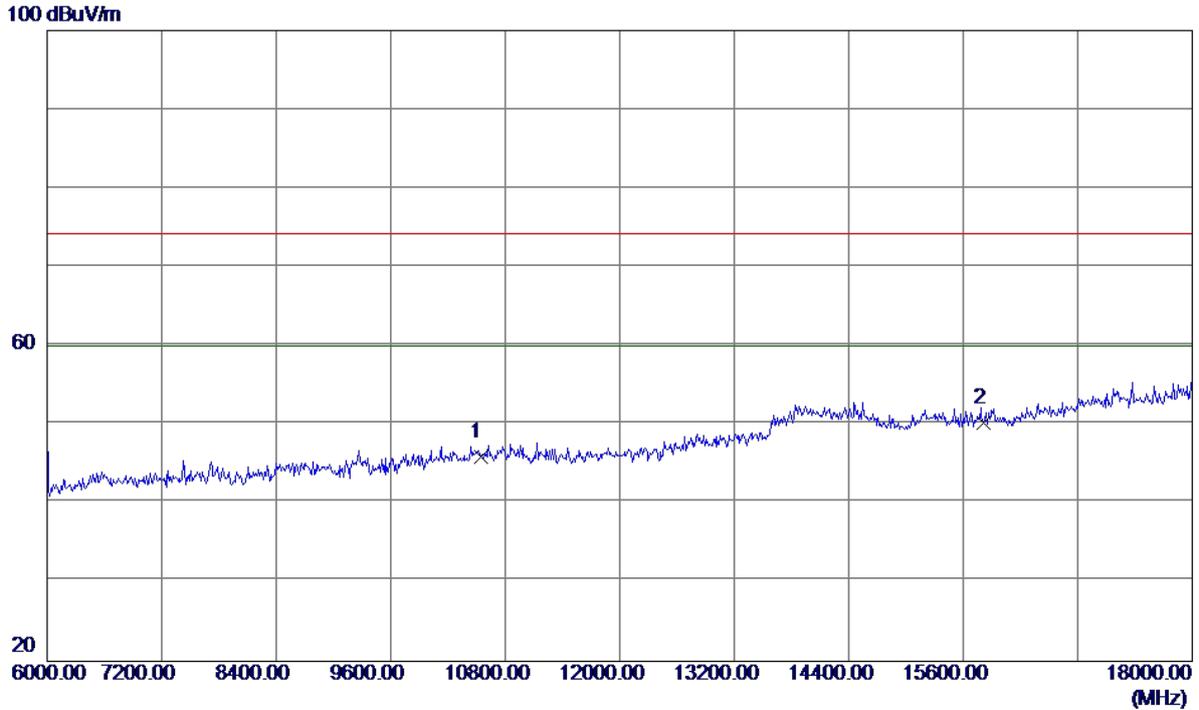


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10540.0000	30.20	15.65	45.85	74.20	-28.35	Peak	
2 *	15810.0000	31.29	18.88	50.17	74.20	-24.03	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

**Vertical**

100 dBuV/m

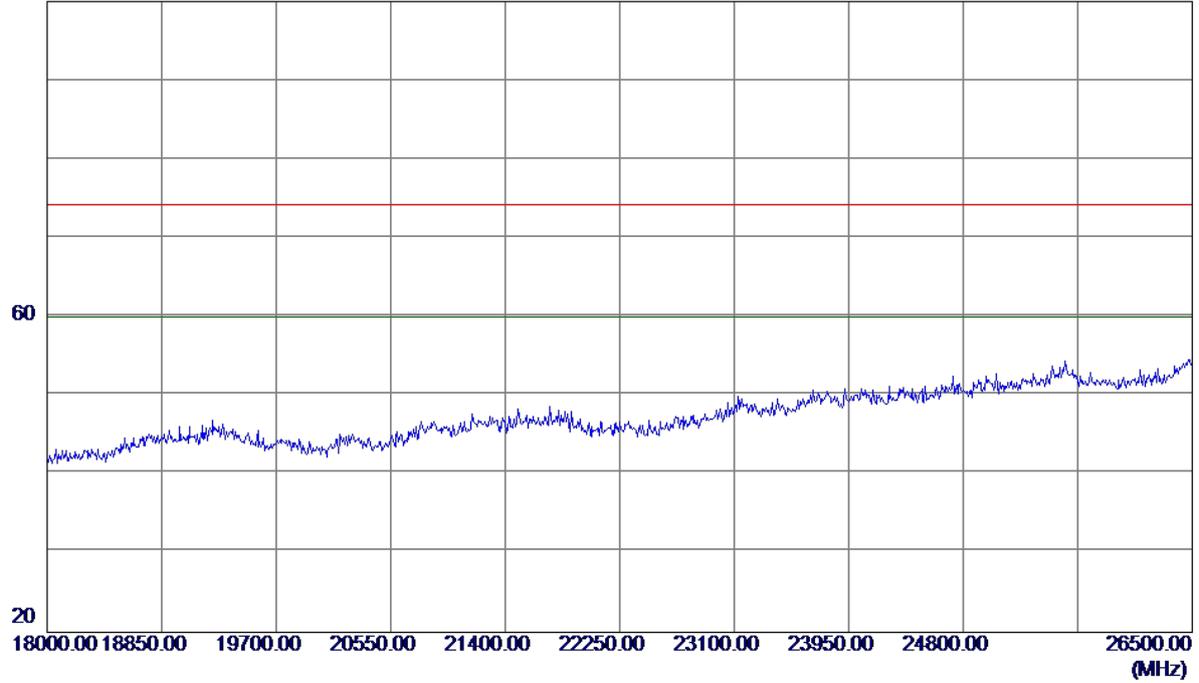


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment



Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


**Horizontal**

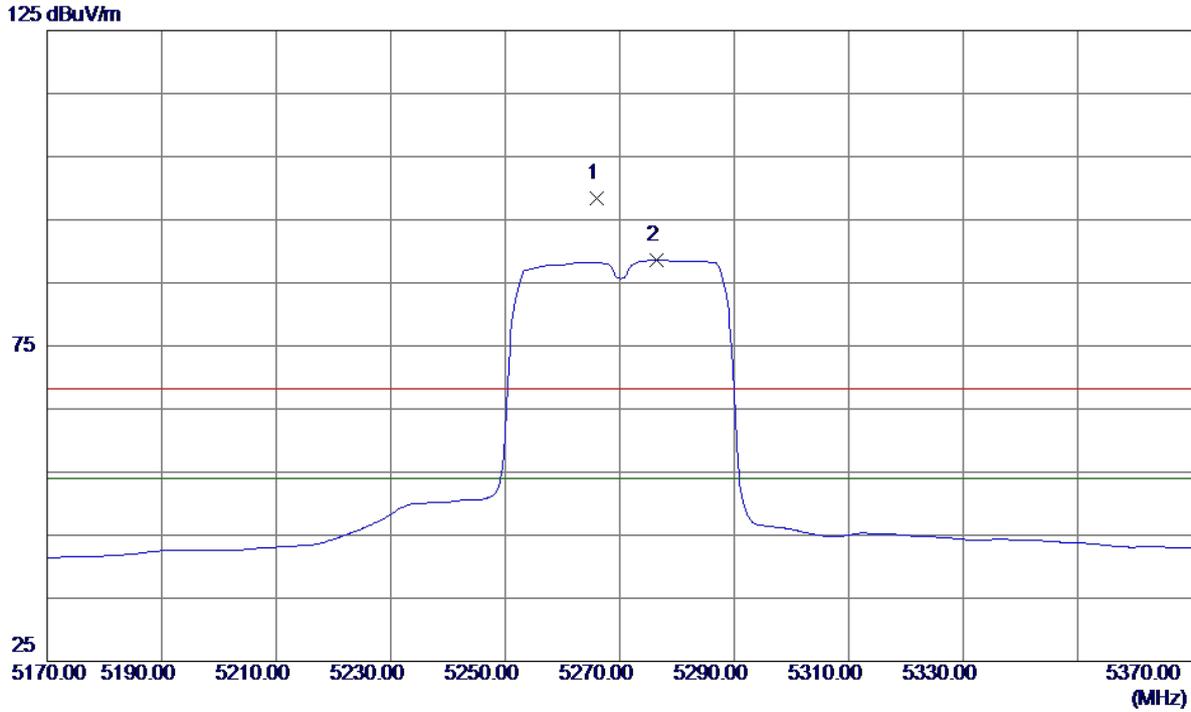

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5266.0000	57.44	41.01	98.45	68.30	30.15	Peak	No Limit
2 *	5276.4000	47.58	41.04	88.62	54.00	34.62	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


**Horizontal**

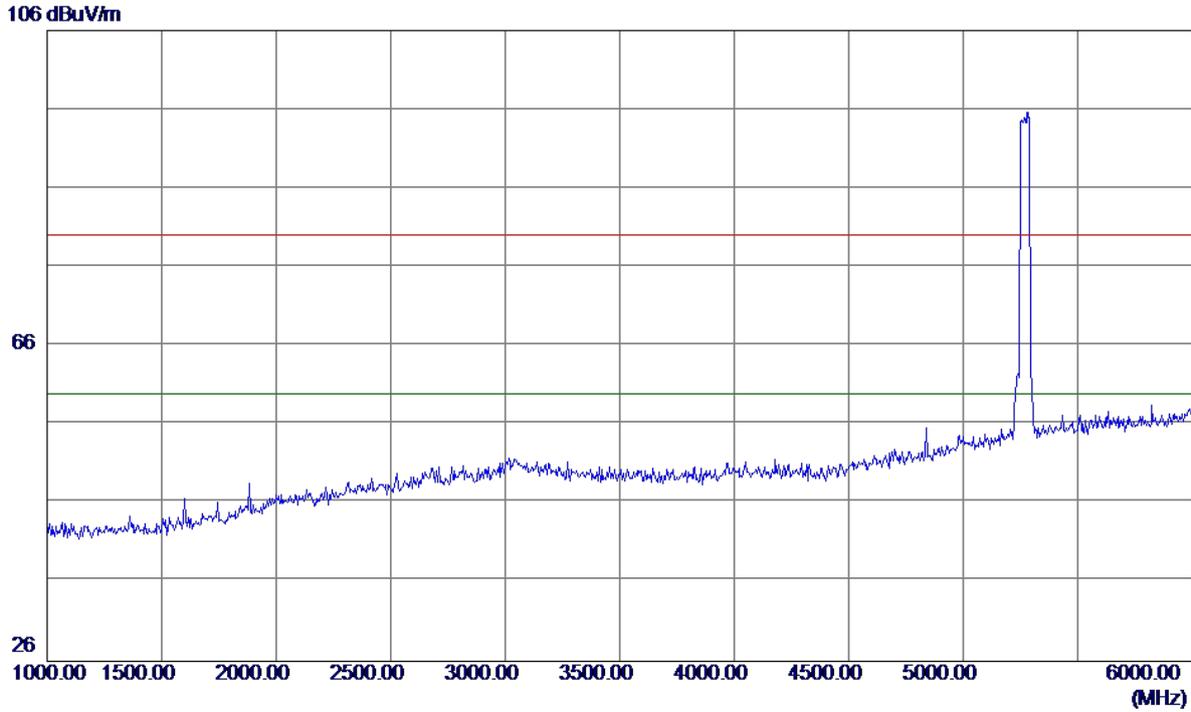

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

**Horizontal**

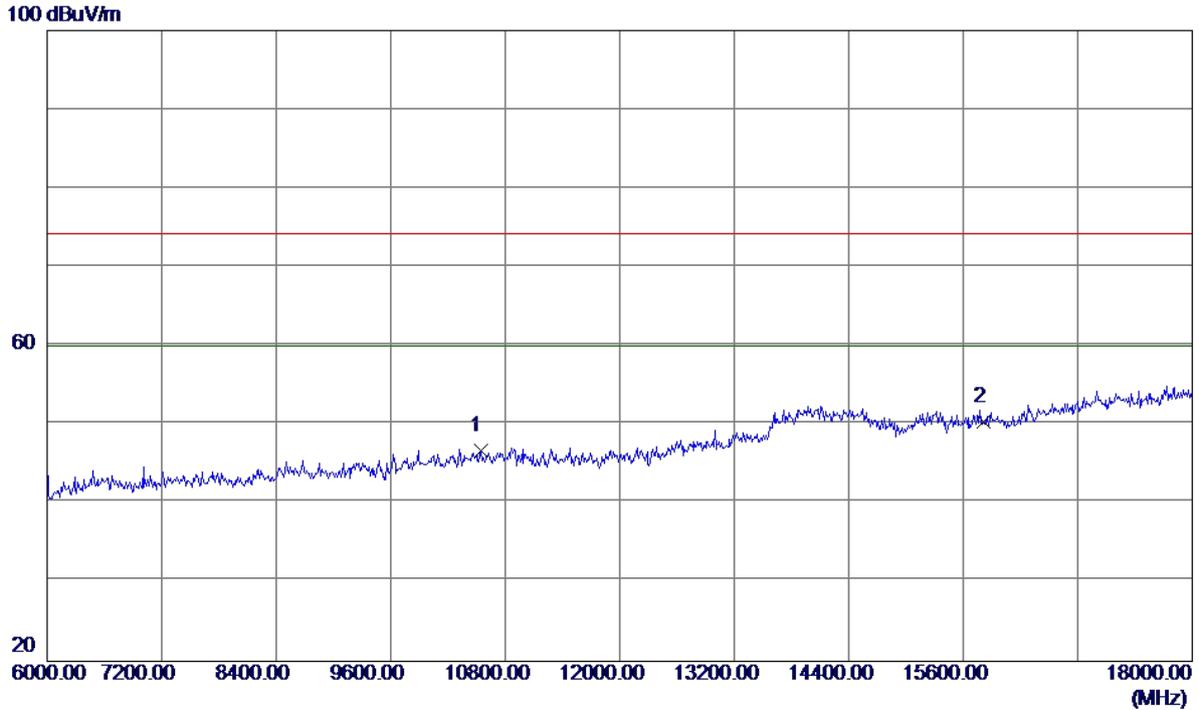


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10540.0000	31.07	15.65	46.72	74.20	-27.48	Peak	
2 *	15810.0000	31.48	18.88	50.36	74.20	-23.84	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

**Horizontal**

100 dBuV/m

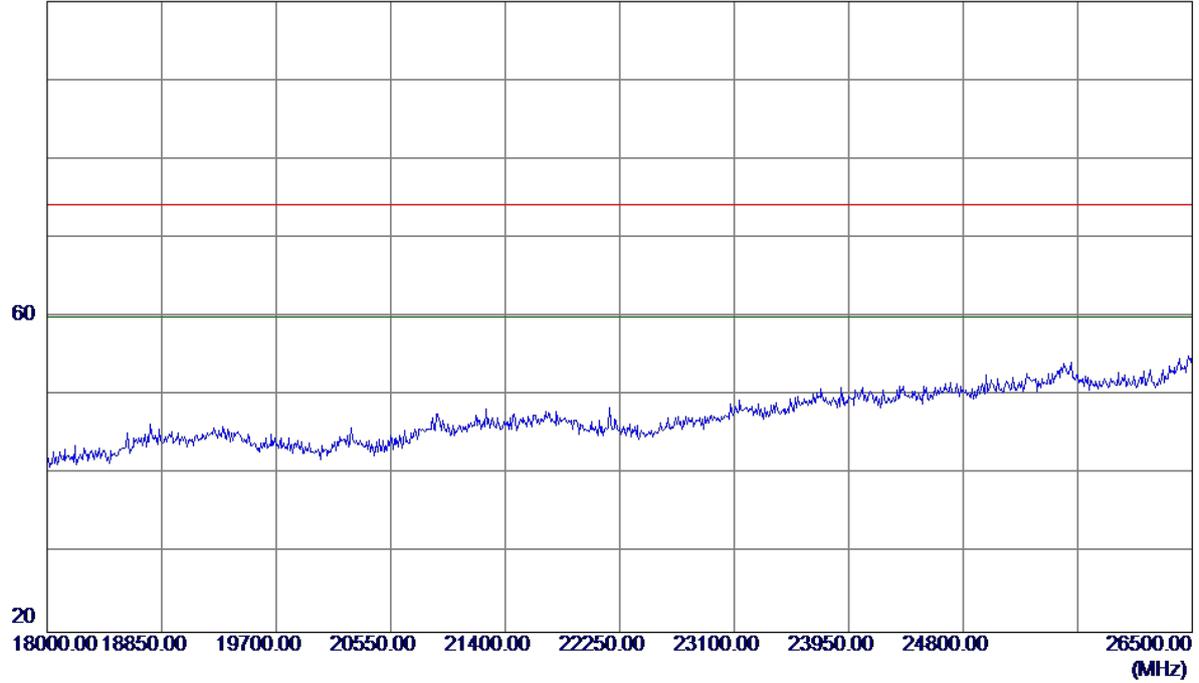


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment



Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

**Vertical**


125 dBuV/m

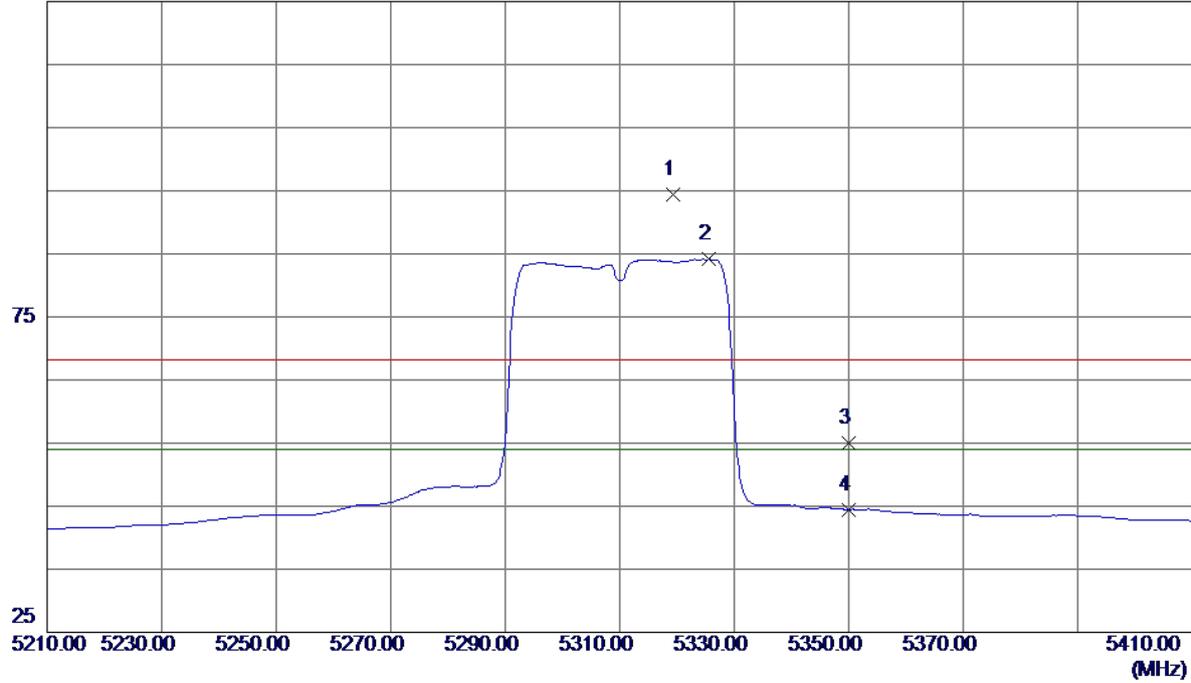

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5319.4000	53.25	41.18	94.43	68.30	26.13	Peak	No Limit
2 *	5325.6000	42.93	41.20	84.13	54.00	30.13	AVG	No Limit
3	5350.0000	13.73	41.28	55.01	68.30	-13.29	Peak	
4	5350.0000	3.19	41.28	44.47	54.00	-9.53	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


**Vertical**

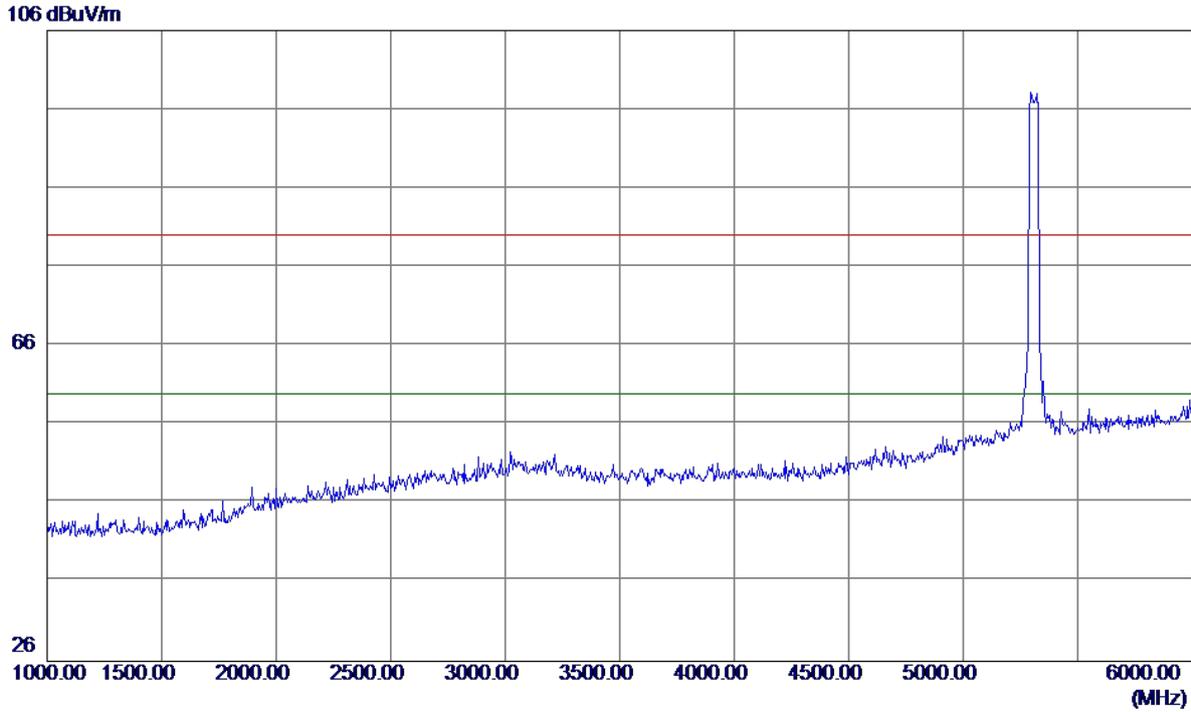

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

**Vertical**

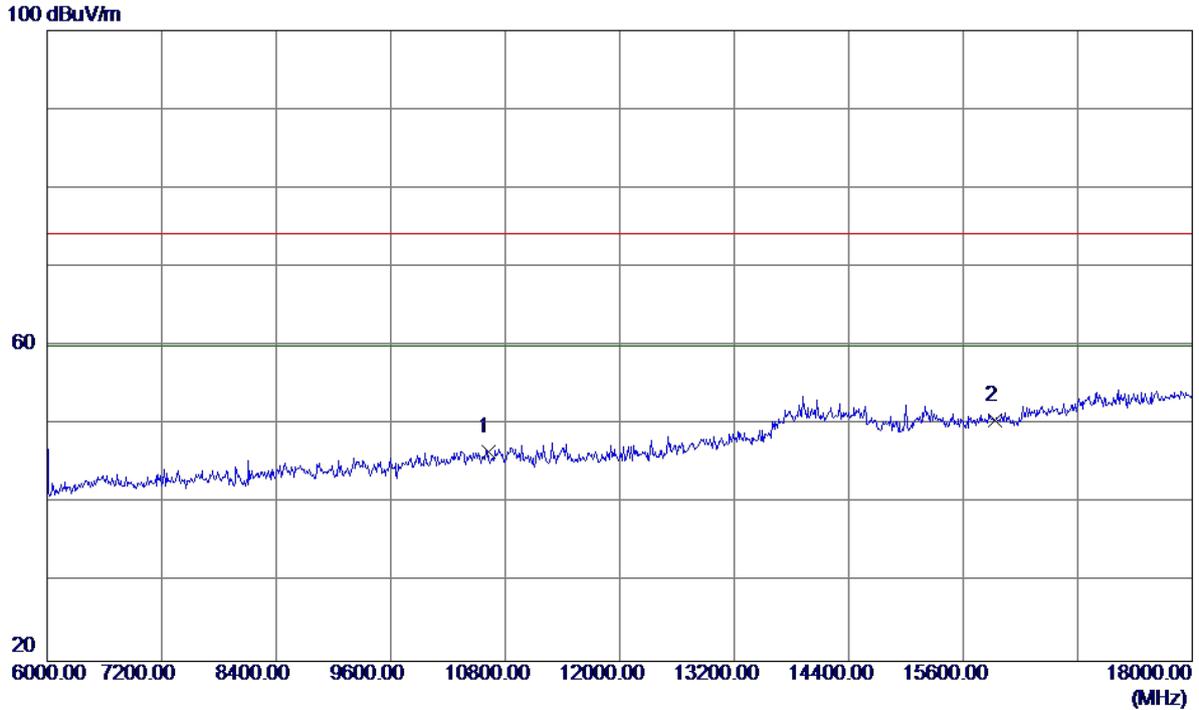


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0000	30.80	15.77	46.57	74.20	-27.63	Peak	
2 *	15930.0000	31.68	18.89	50.57	74.20	-23.63	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

**Vertical**

100 dBuV/m

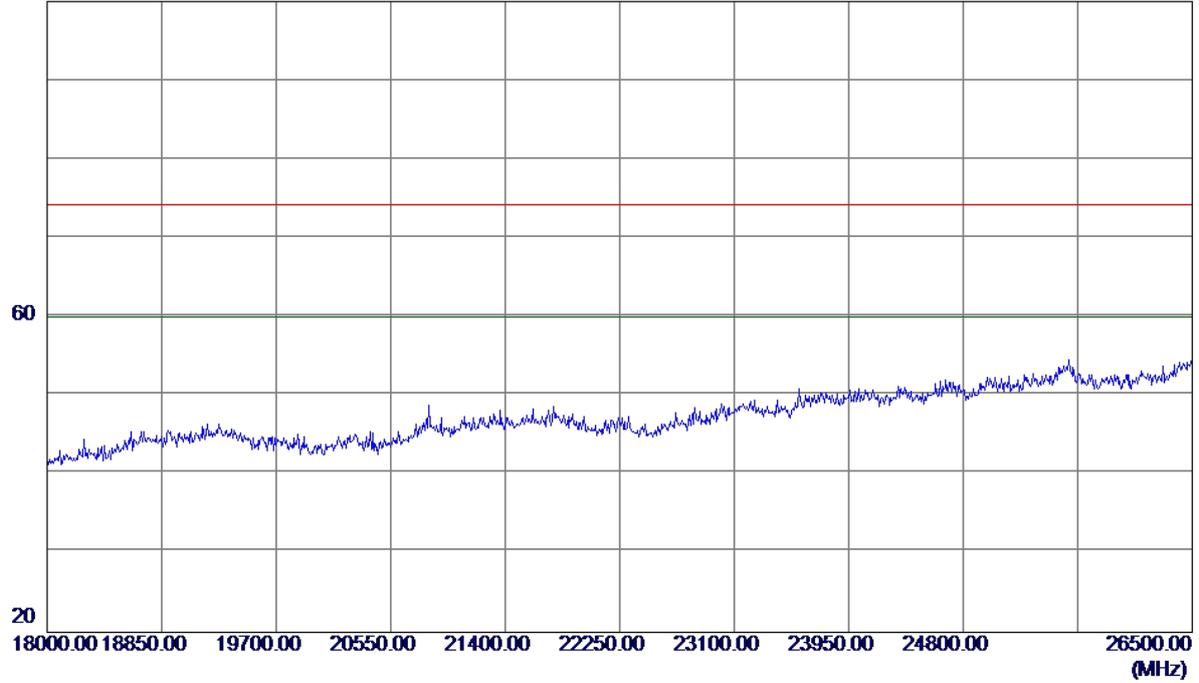


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------



Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

**Horizontal**


125 dBuV/m

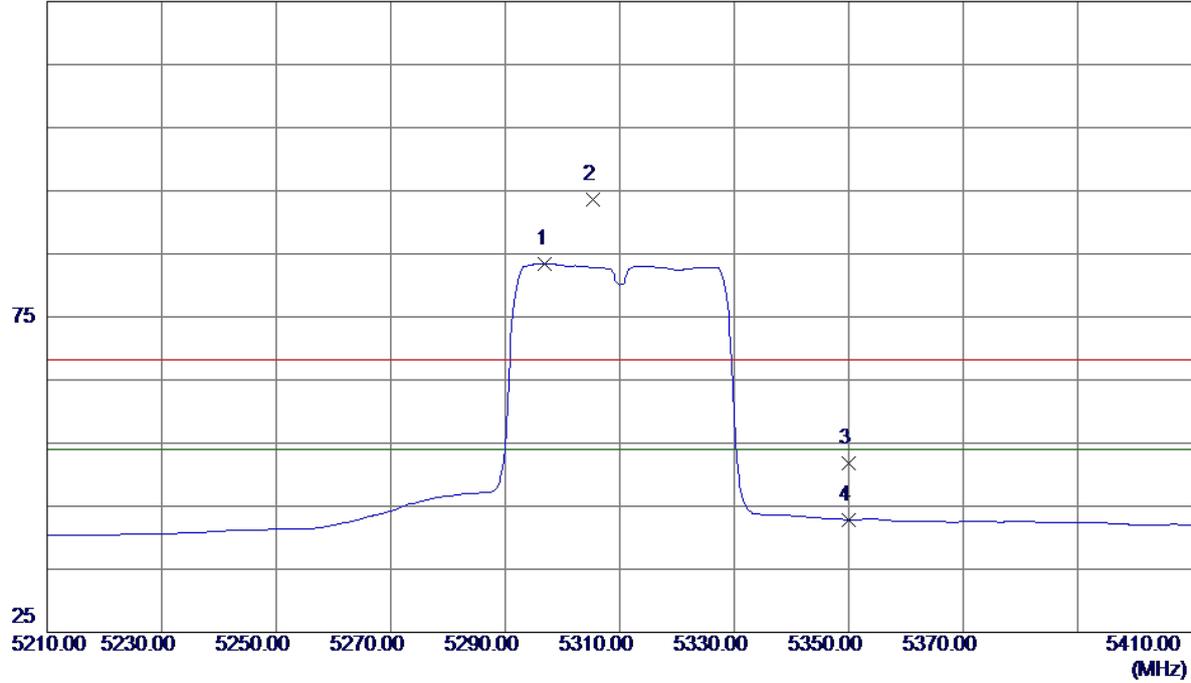

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5297.0000	42.37	41.11	83.48	54.00	29.48	AVG	No Limit
2	5305.4000	52.50	41.14	93.64	68.30	25.34	Peak	No Limit
3	5350.0000	10.53	41.28	51.81	68.30	-16.49	Peak	
4	5350.0000	1.59	41.28	42.87	54.00	-11.13	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


**Horizontal**

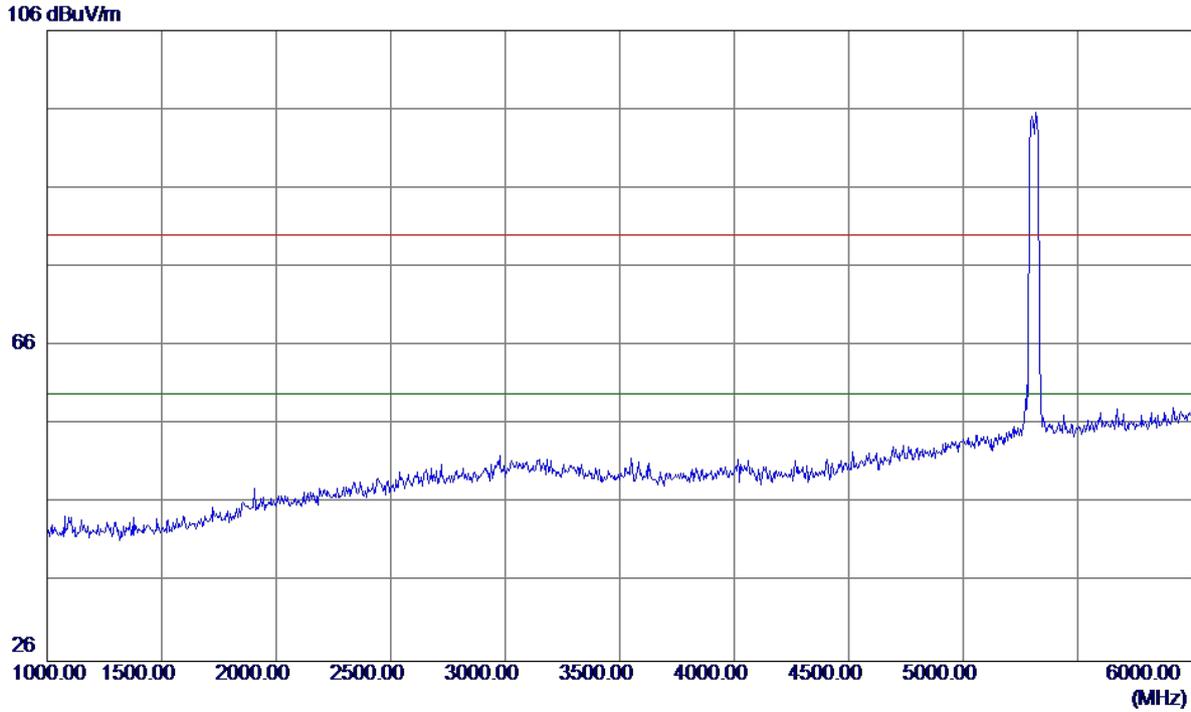

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

**Horizontal**

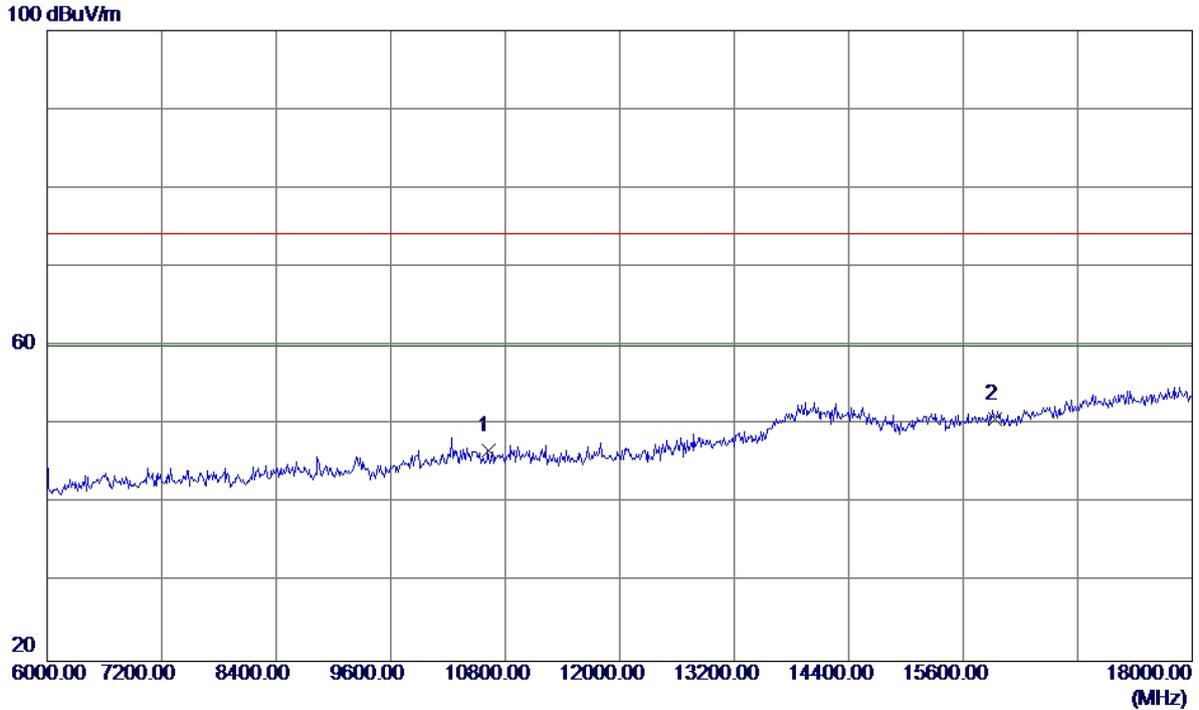


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0000	30.88	15.77	46.65	74.20	-27.55	Peak	
2 *	15930.0000	31.81	18.89	50.70	74.20	-23.50	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

**Horizontal**


100 dBuV/m

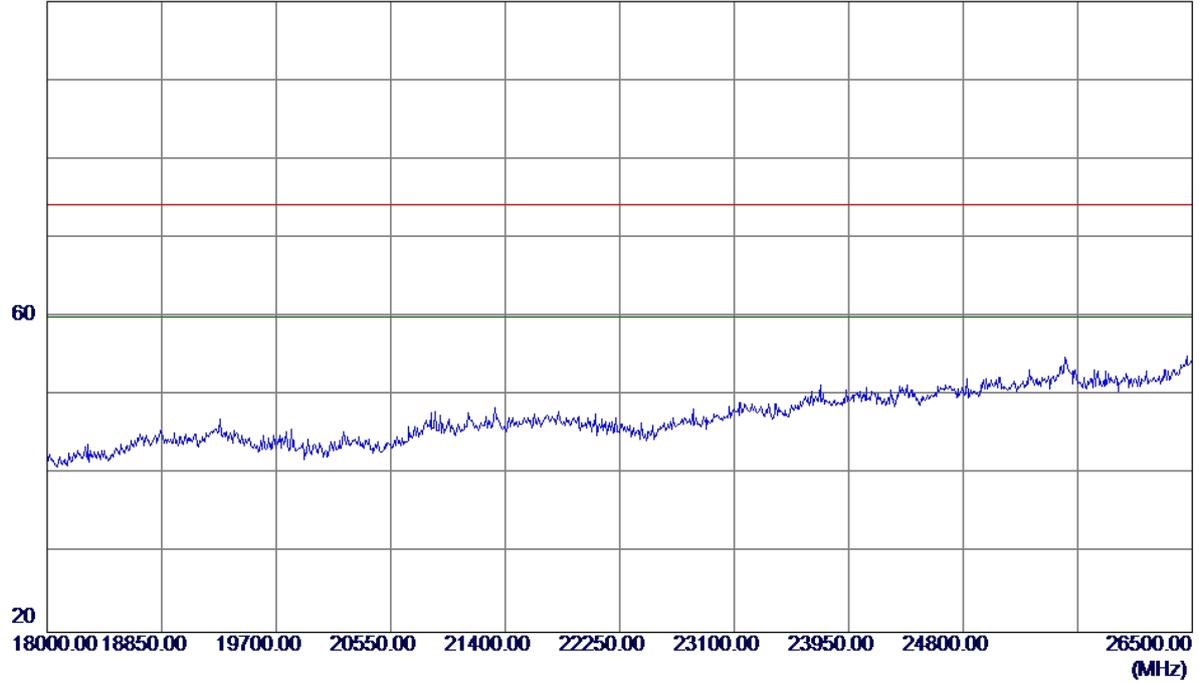

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

**Horizontal**

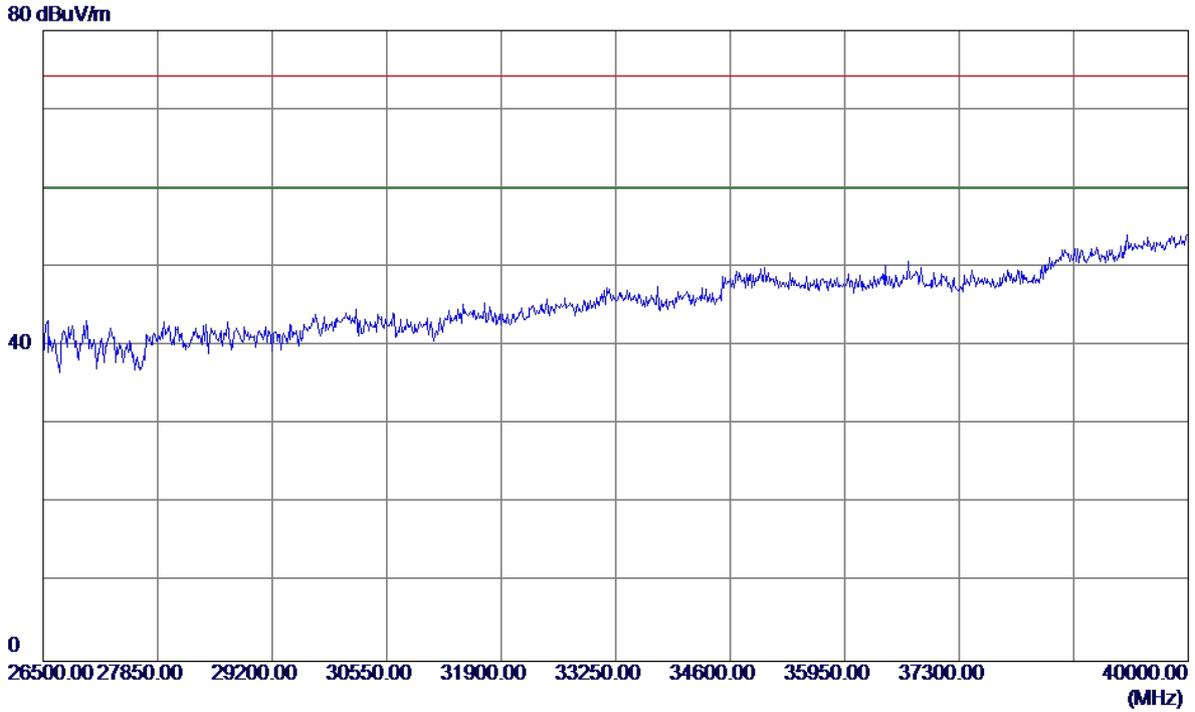


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

**Vertical**


125 dBuV/m

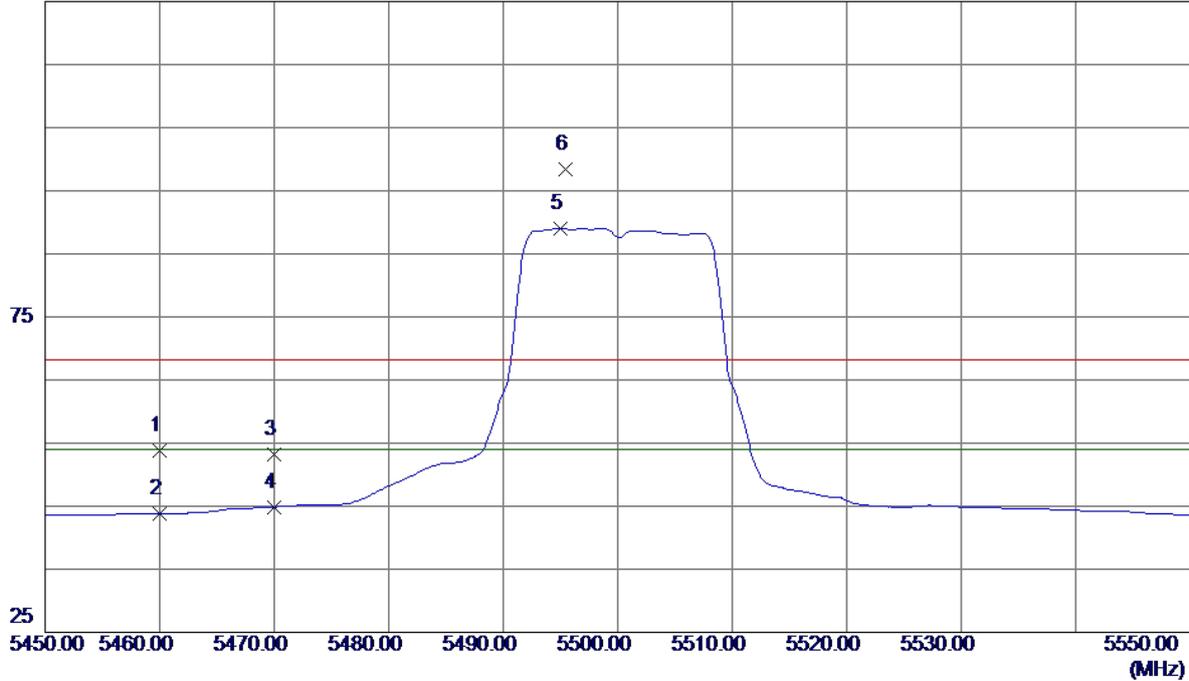

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	12.06	41.65	53.71	68.30	-14.59	Peak	
2	5460.0000	2.17	41.65	43.82	54.00	-10.18	AVG	
3	5470.0000	11.48	41.68	53.16	68.30	-15.14	Peak	
4	5470.0000	3.20	41.68	44.88	54.00	-9.12	AVG	
5 *	5495.0000	47.30	41.76	89.06	54.00	35.06	AVG	No Limit
6	5495.4000	56.60	41.76	98.36	68.30	30.06	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

**Vertical**

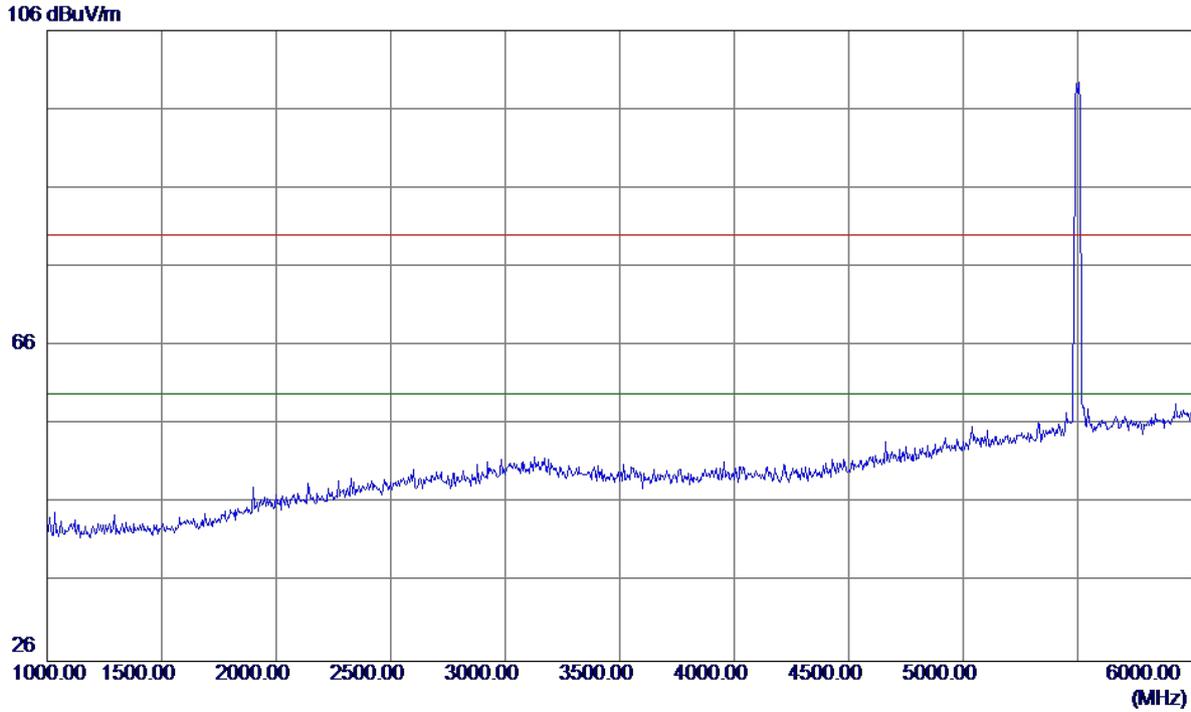


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

**Vertical**

100 dBuV/m

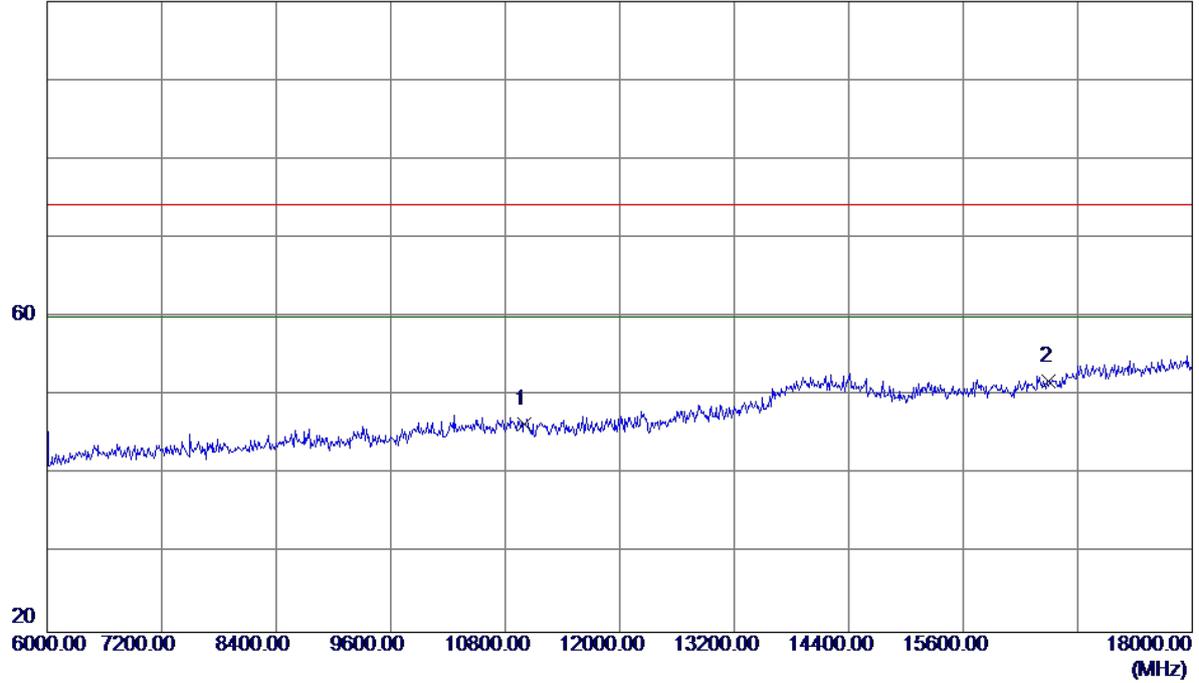


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	30.02	16.33	46.35	74.20	-27.85	Peak	
2 *	16500.0000	32.56	19.23	51.79	74.20	-22.41	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

**Vertical**


100 dBuV/m

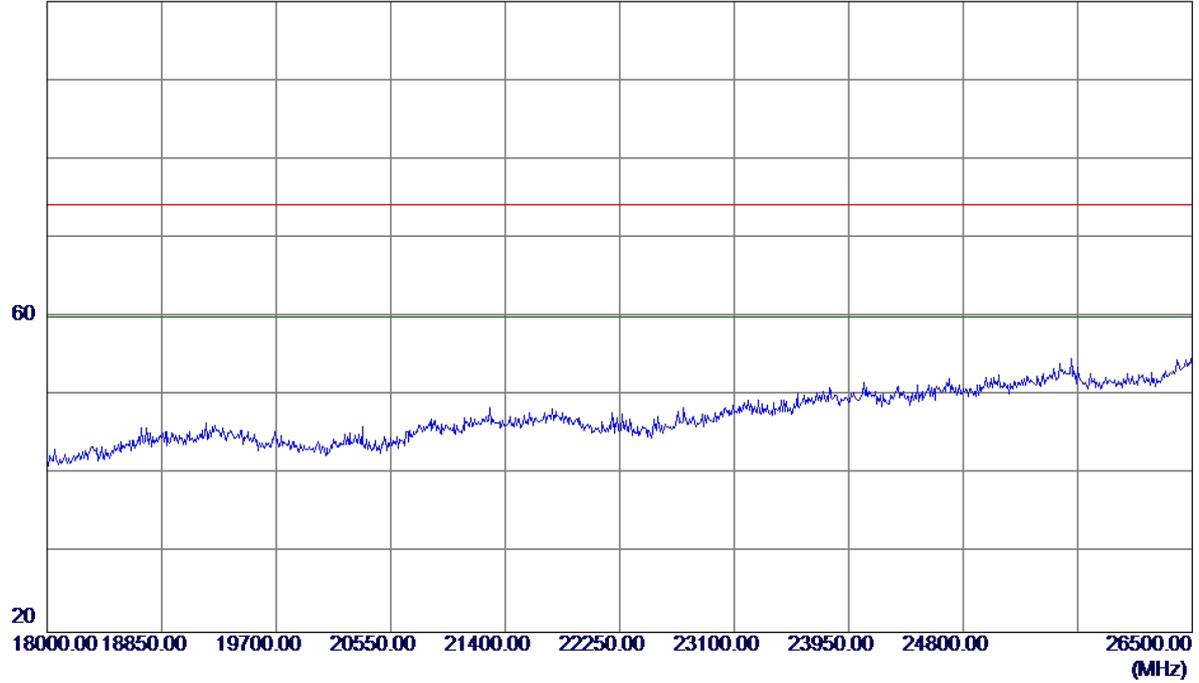

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

**Vertical**

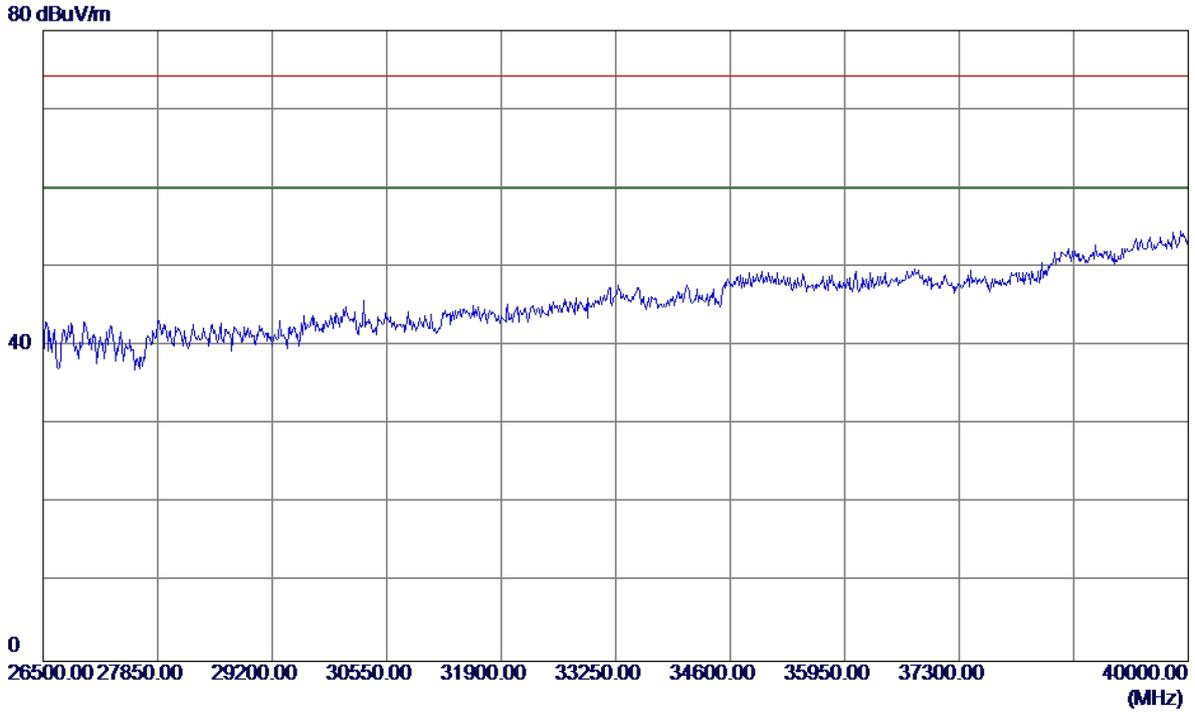


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

### Horizontal


125 dBuV/m

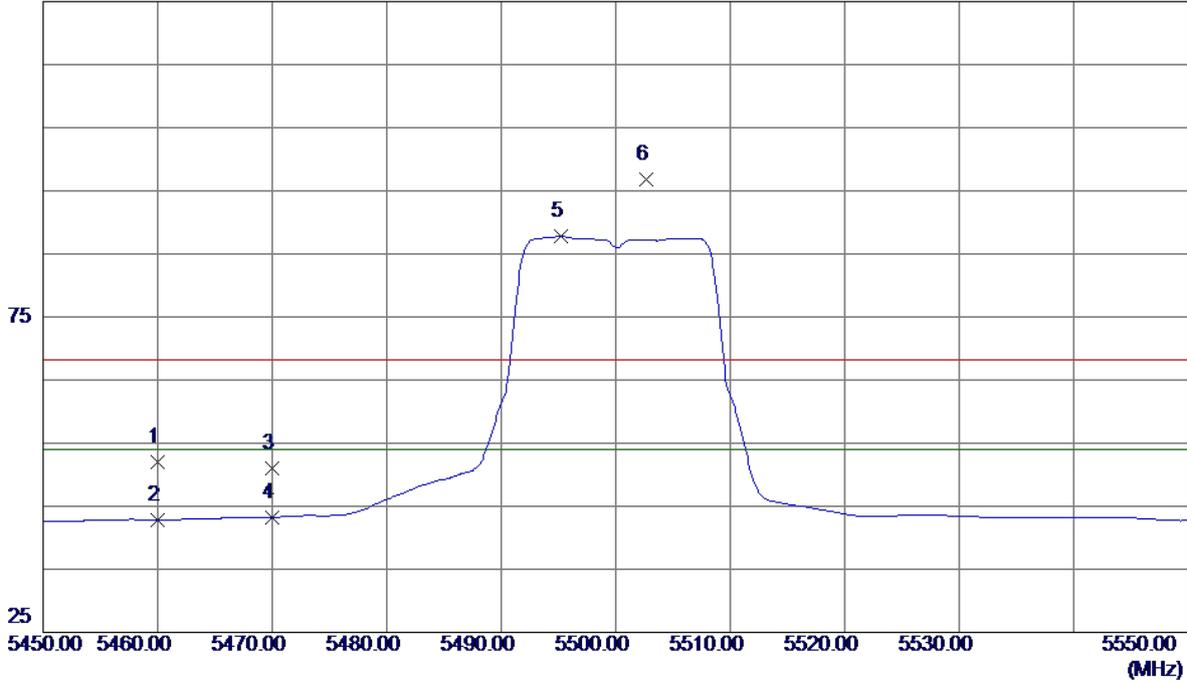

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	10.38	41.65	52.03	68.30	-16.27	Peak	
2	5460.0000	1.23	41.65	42.88	54.00	-11.12	AVG	
3	5470.0000	9.28	41.68	50.96	68.30	-17.34	Peak	
4	5470.0000	1.58	41.68	43.26	54.00	-10.74	AVG	
5 *	5495.2000	45.98	41.76	87.74	54.00	33.74	AVG	No Limit
6	5502.7000	55.09	41.79	96.88	68.30	28.58	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

**Horizontal**

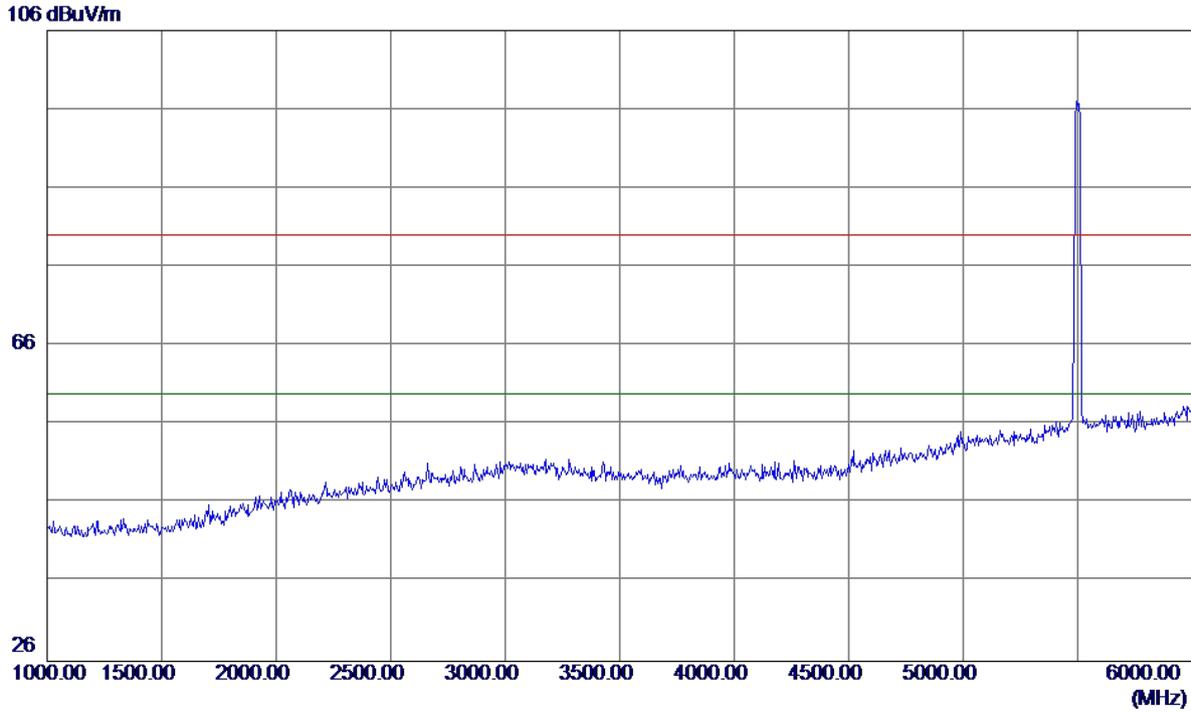


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

**Horizontal**

100 dBuV/m

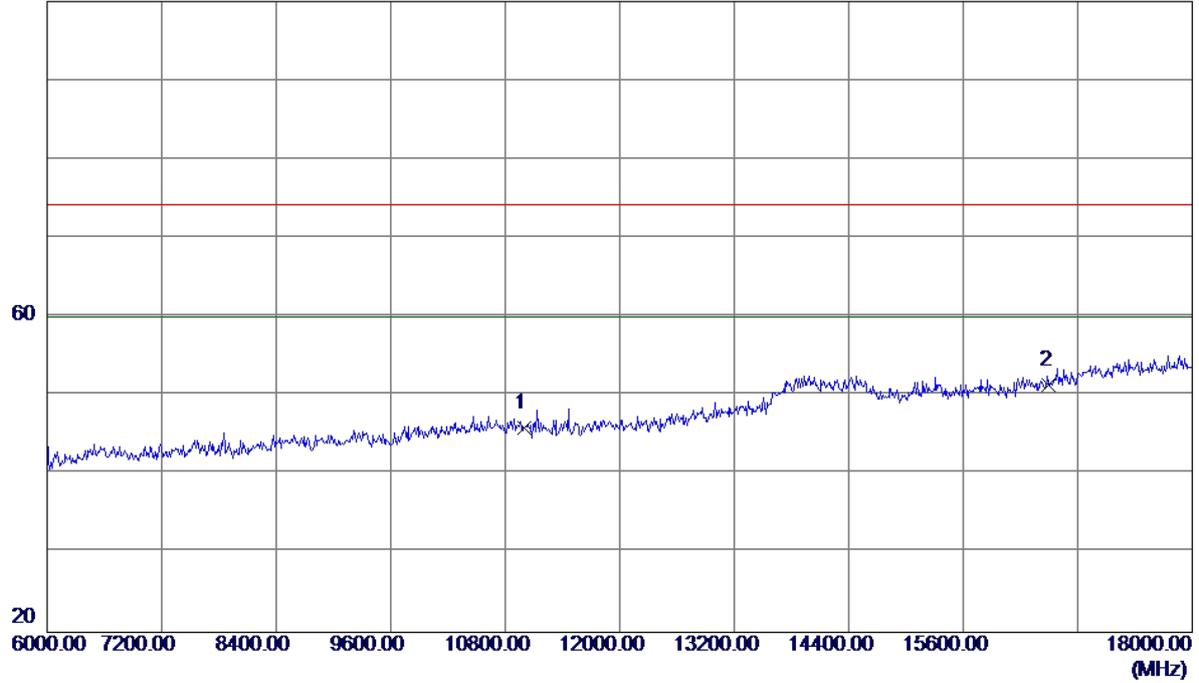


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	29.58	16.33	45.91	74.20	-28.29	Peak	
2 *	16500.0000	32.20	19.23	51.43	74.20	-22.77	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

**Horizontal**


100 dBuV/m

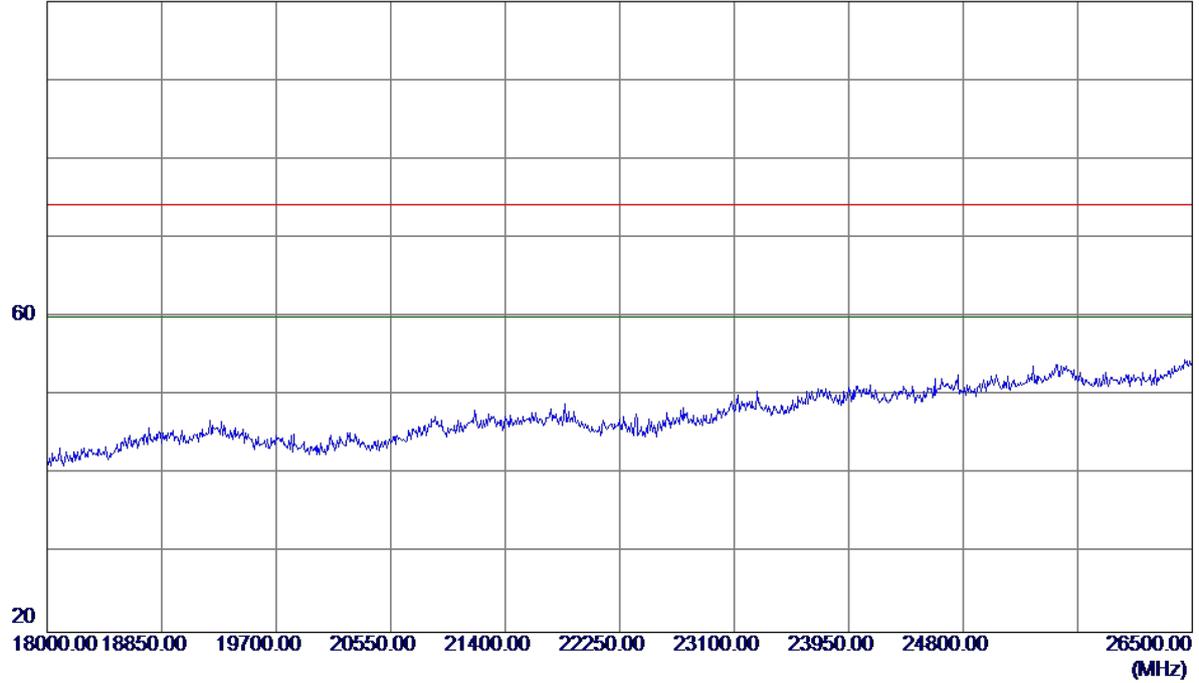

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

**Horizontal**

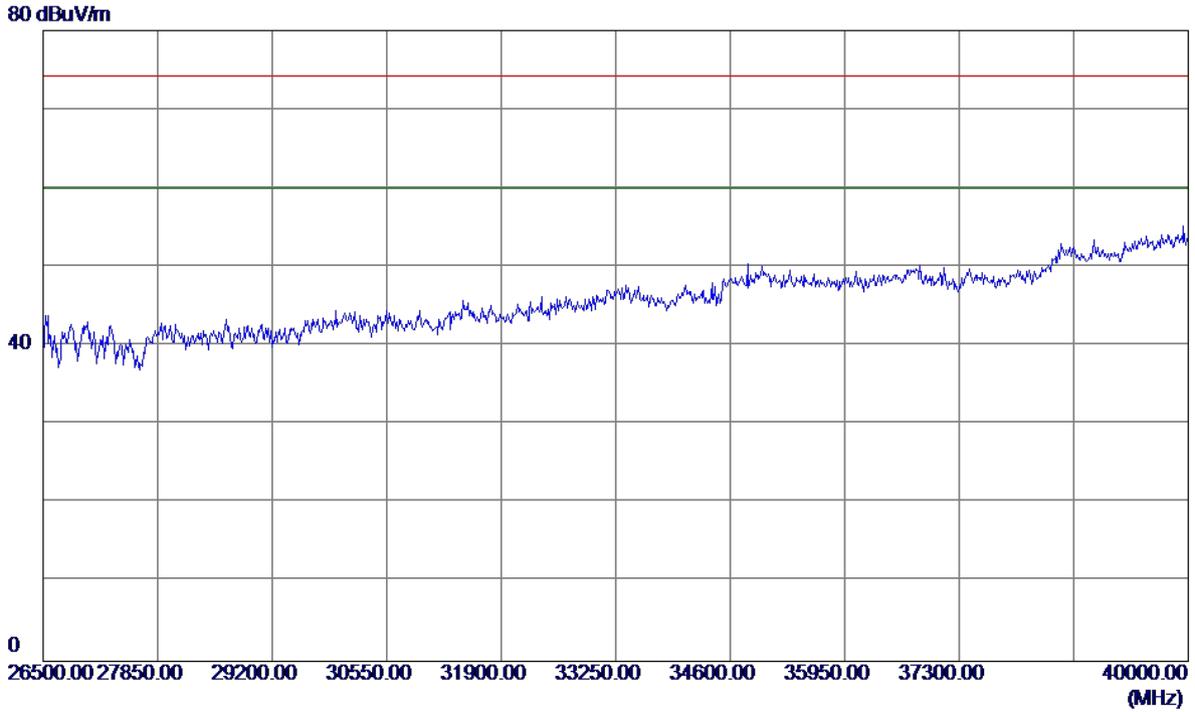


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

**Vertical**


125 dBuV/m

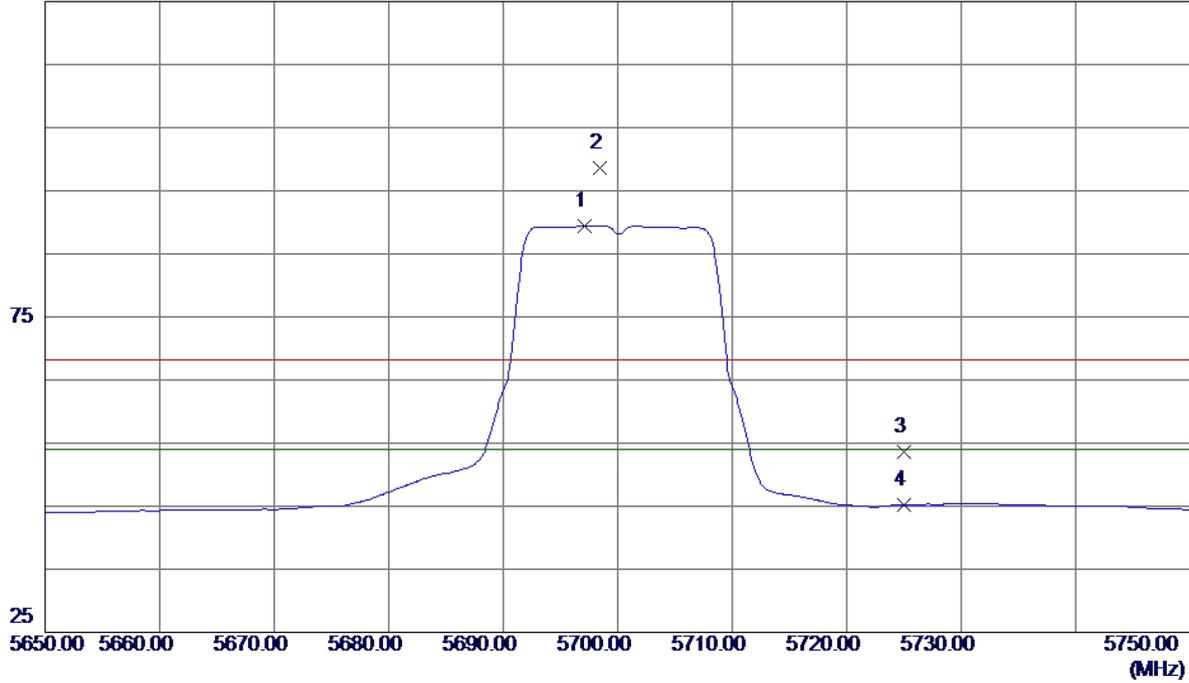

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5697.1000	46.93	42.48	89.41	54.00	35.41	AVG	No Limit
2	5698.4000	56.06	42.49	98.55	68.30	30.25	Peak	No Limit
3	5725.0000	11.05	42.58	53.63	68.30	-14.67	Peak	
4	5725.0000	2.65	42.58	45.23	54.00	-8.77	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

**Vertical**

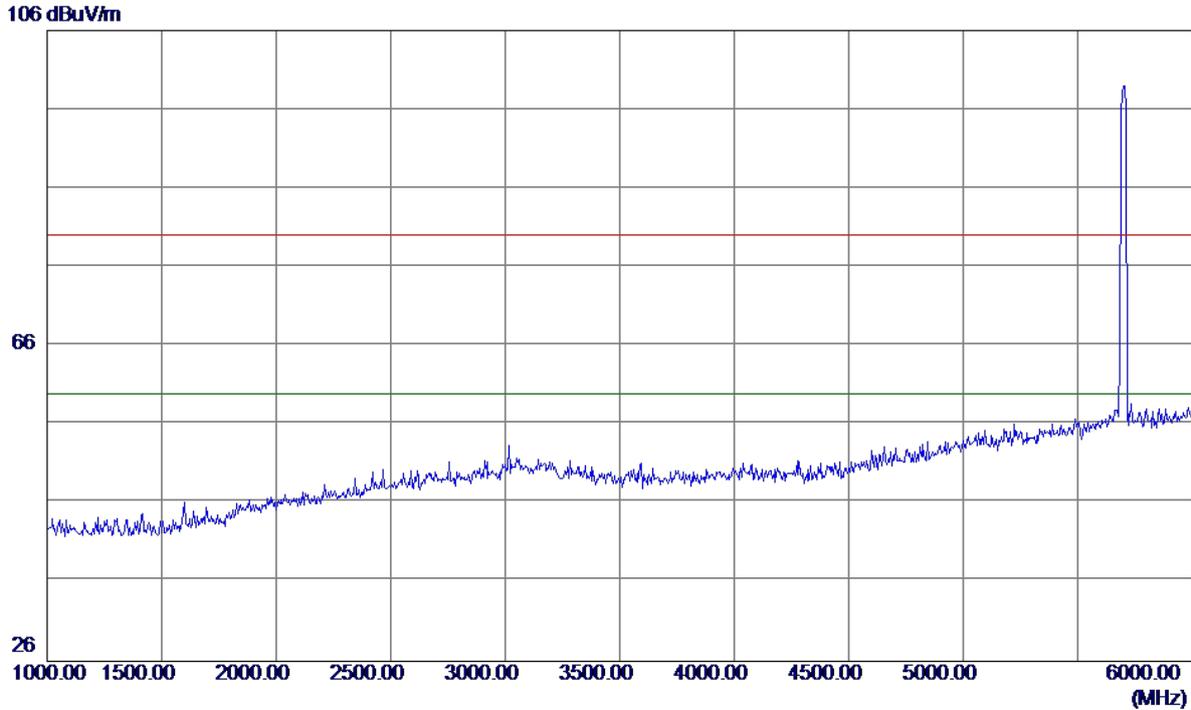


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

**Vertical**

100 dBuV/m

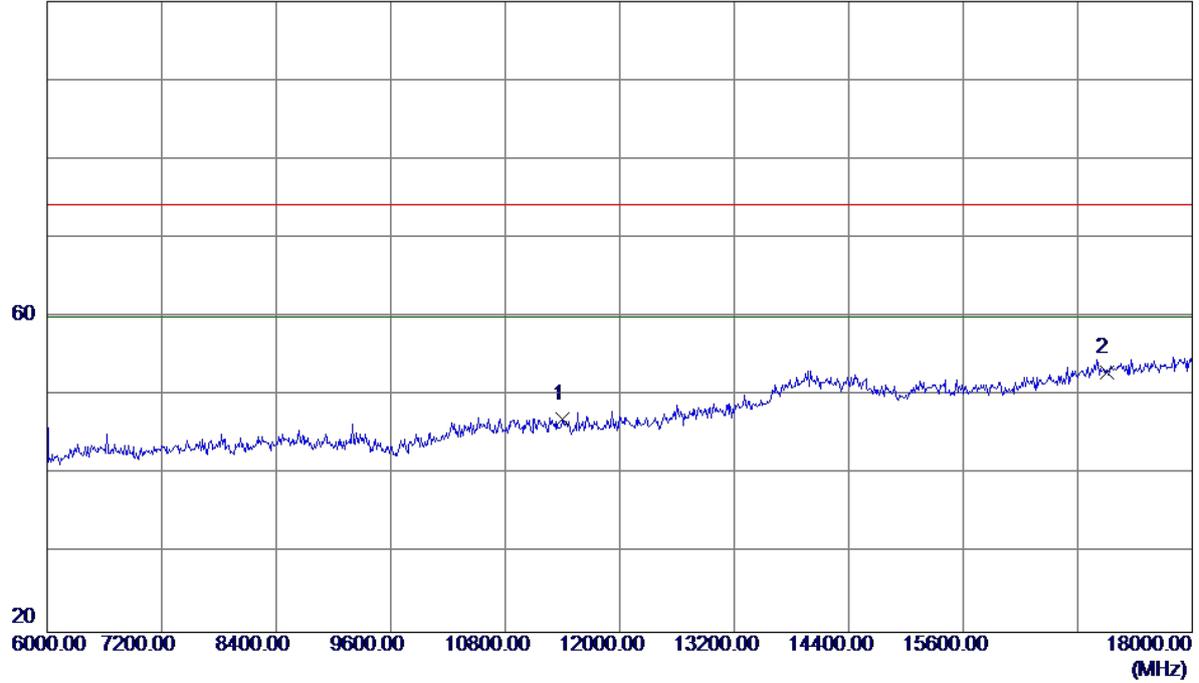


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	31.01	16.03	47.04	74.20	-27.16	Peak	
2 *	17100.0000	30.84	22.09	52.93	74.20	-21.27	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

**Vertical**

100 dBuV/m

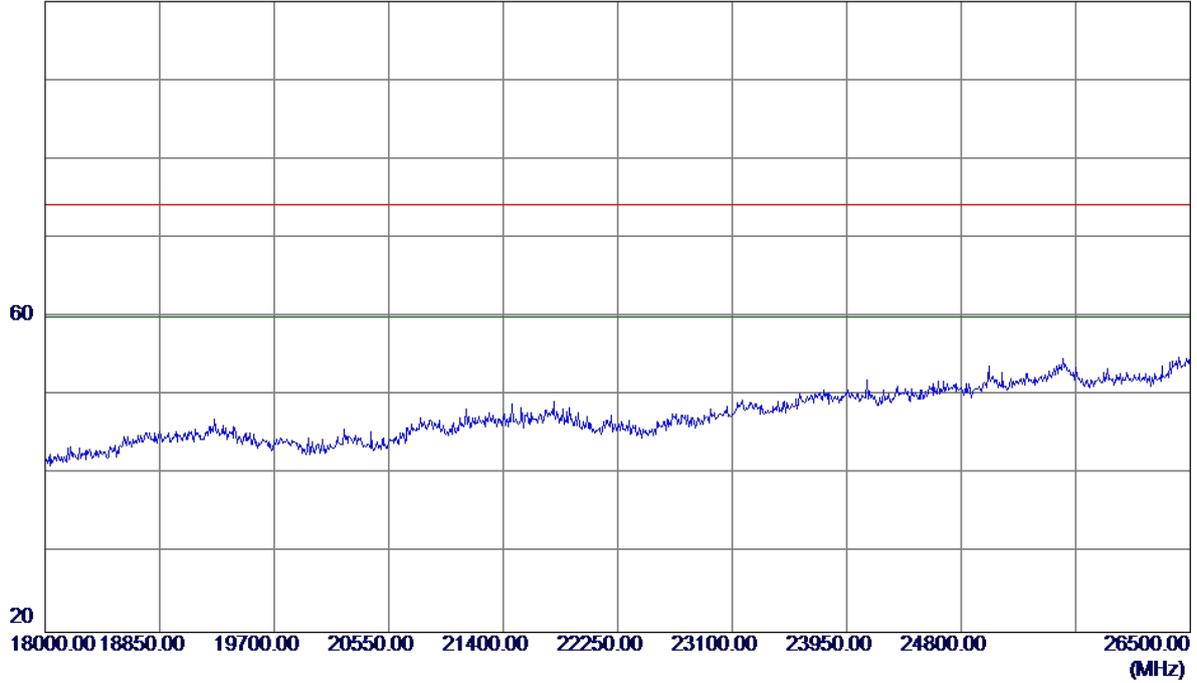


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------



Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


**Horizontal**

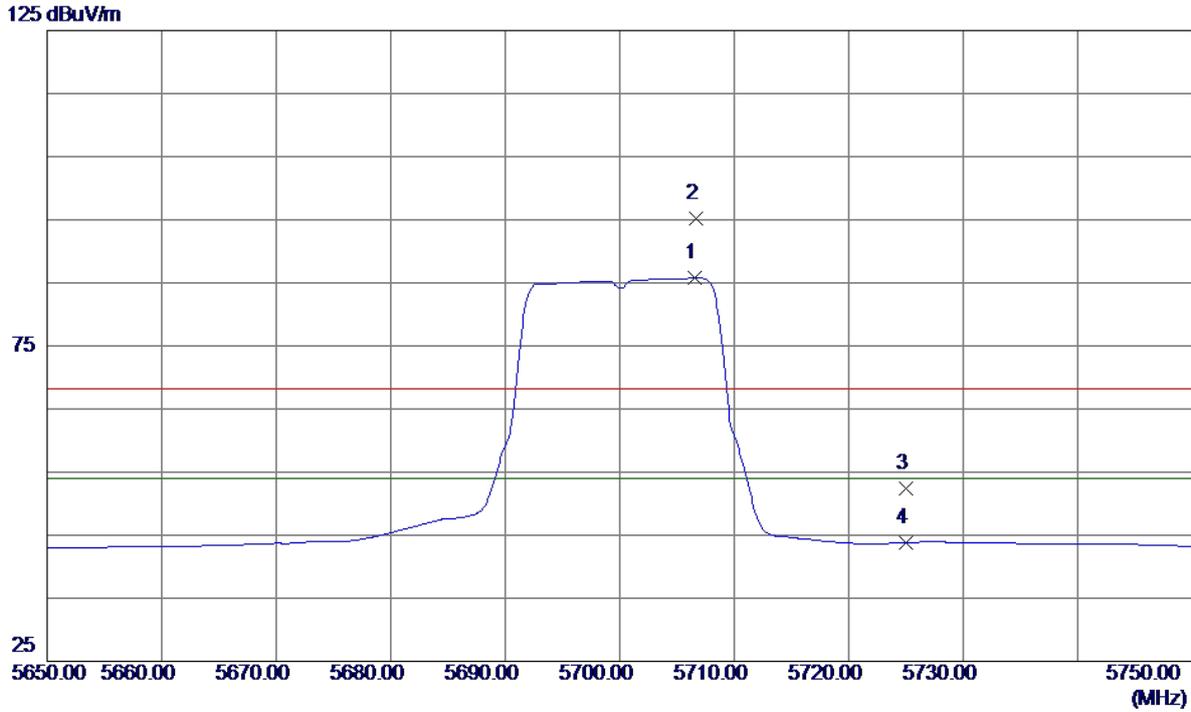

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5706.6000	43.25	42.52	85.77	54.00	31.77	AVG	No Limit
2	5706.7000	52.63	42.52	95.15	68.30	26.85	Peak	No Limit
3	5725.0000	9.73	42.58	52.31	68.30	-15.99	Peak	
4	5725.0000	1.25	42.58	43.83	54.00	-10.17	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

**Horizontal**

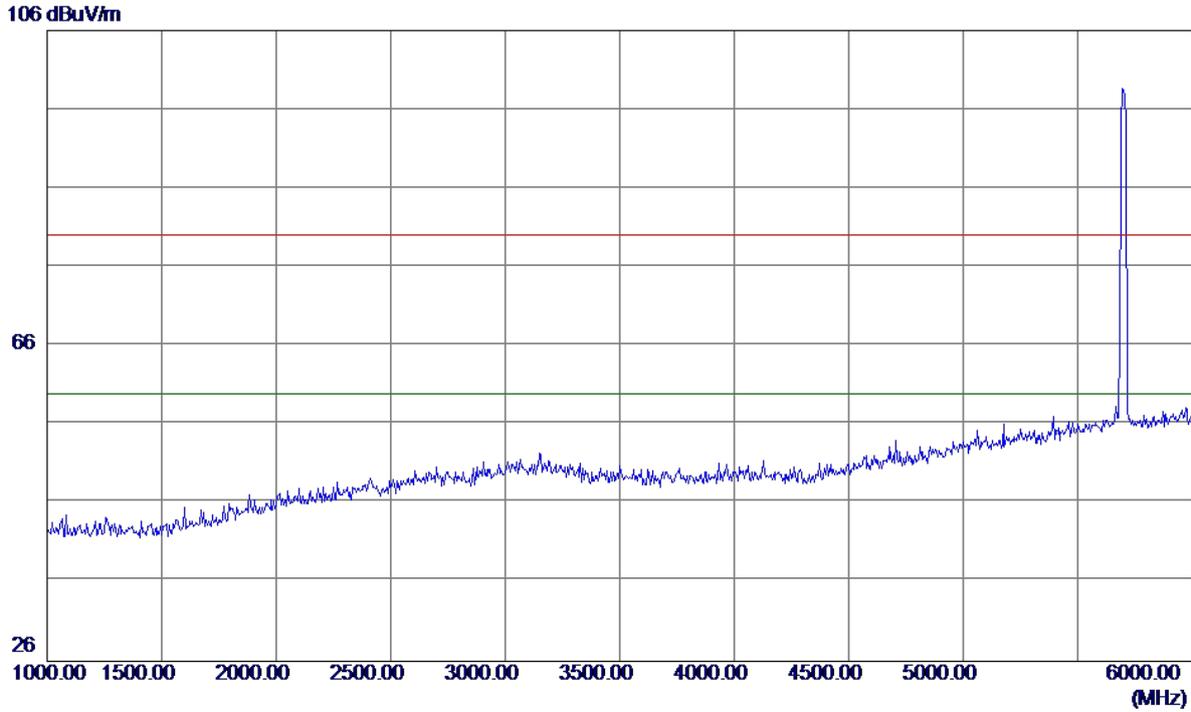


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

**Horizontal**

100 dBuV/m

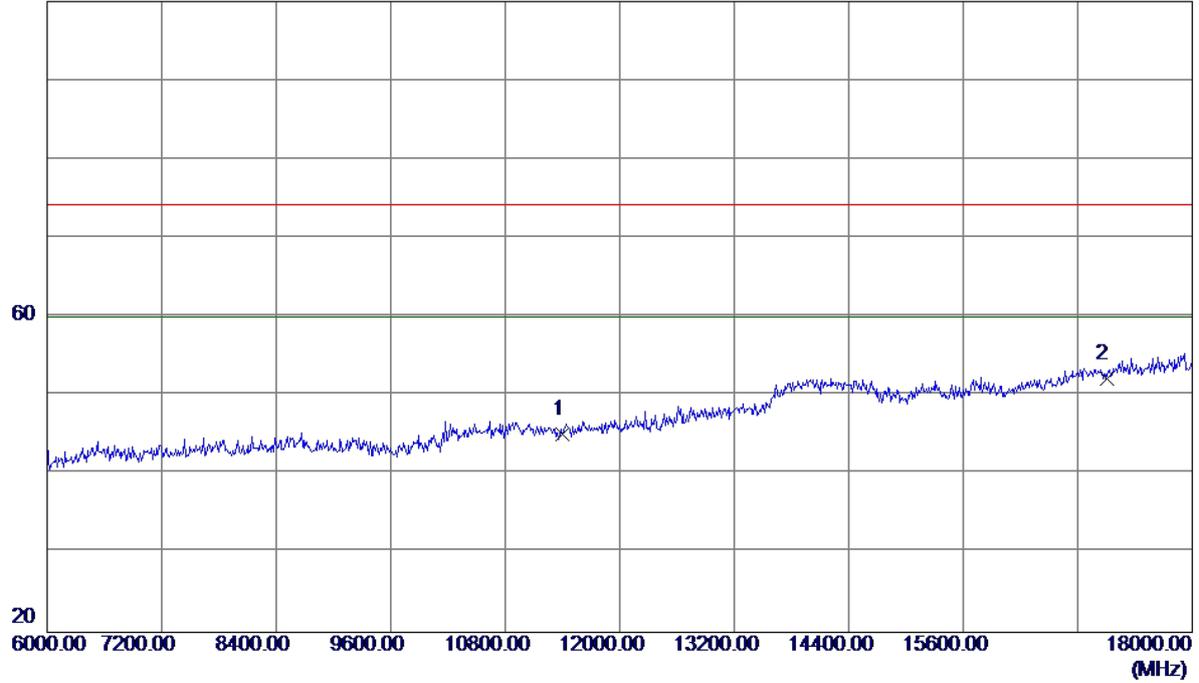


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	29.06	16.03	45.09	74.20	-29.11	Peak	
2 *	17100.0000	30.01	22.09	52.10	74.20	-22.10	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

**Horizontal**


100 dBuV/m

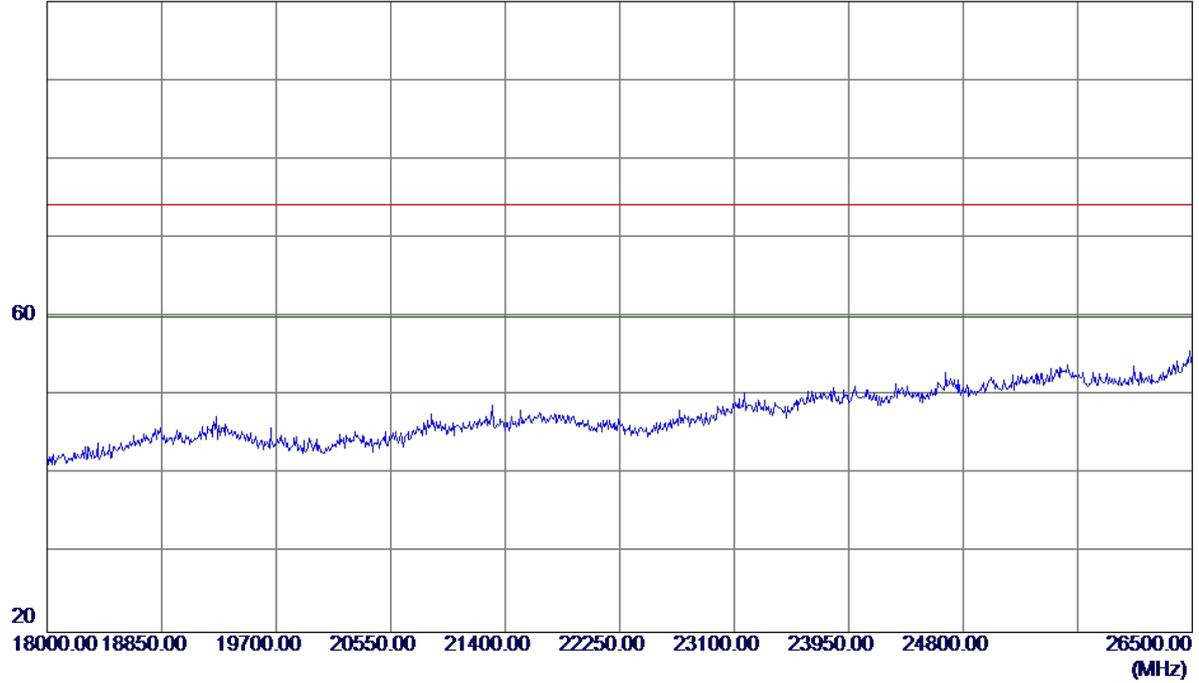

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

**Horizontal**

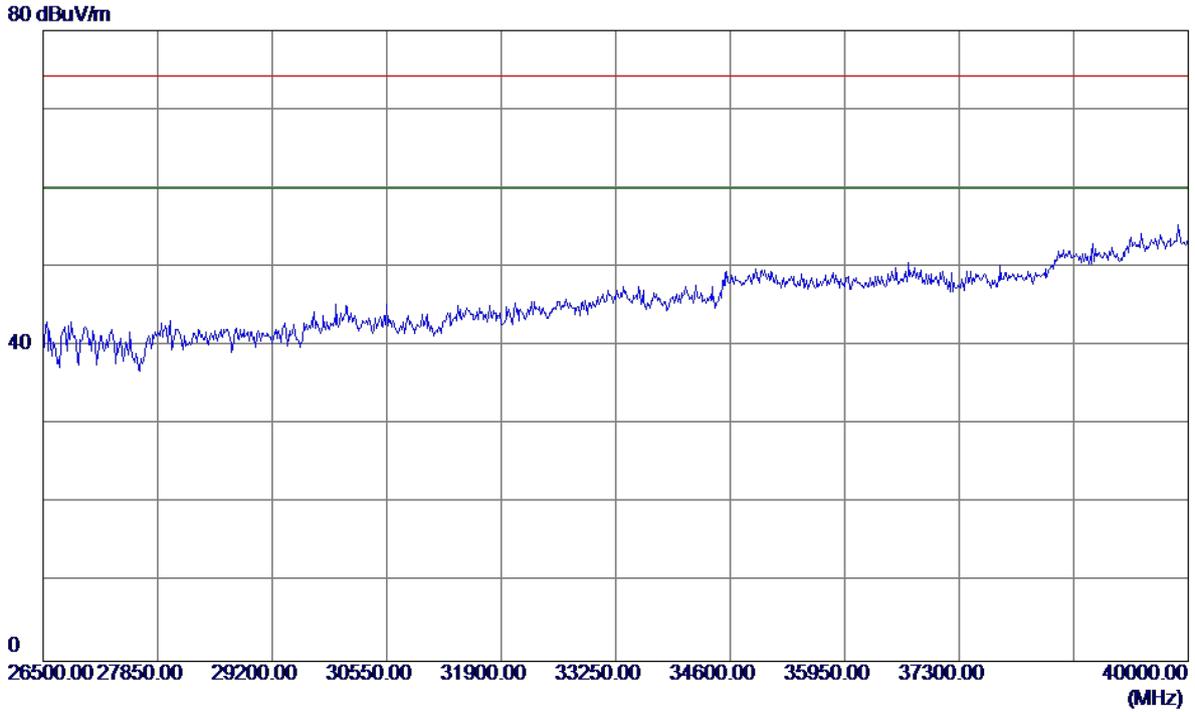


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

**Vertical**


125 dBuV/m

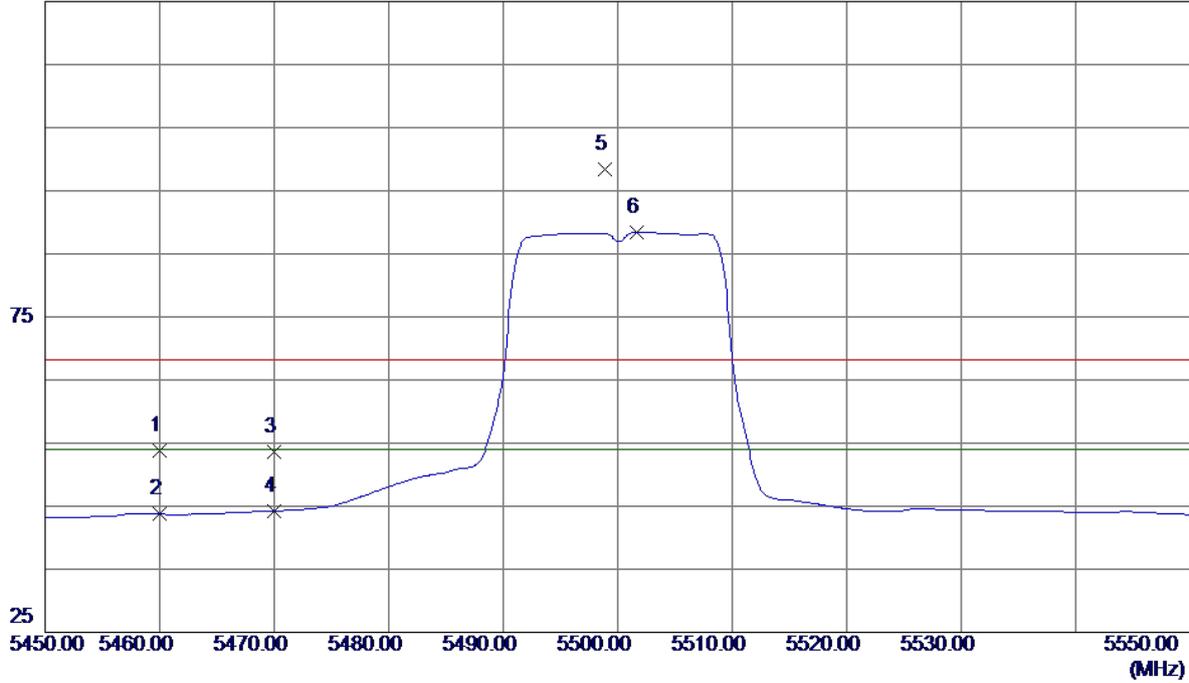

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	12.10	41.65	53.75	68.30	-14.55	Peak	
2	5460.0000	2.15	41.65	43.80	54.00	-10.20	AVG	
3	5470.0000	11.95	41.68	53.63	68.30	-14.67	Peak	
4	5470.0000	2.55	41.68	44.23	54.00	-9.77	AVG	
5	5498.9000	56.55	41.78	98.33	68.30	30.03	Peak	No Limit
6 *	5501.7000	46.68	41.79	88.47	54.00	34.47	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

**Vertical**

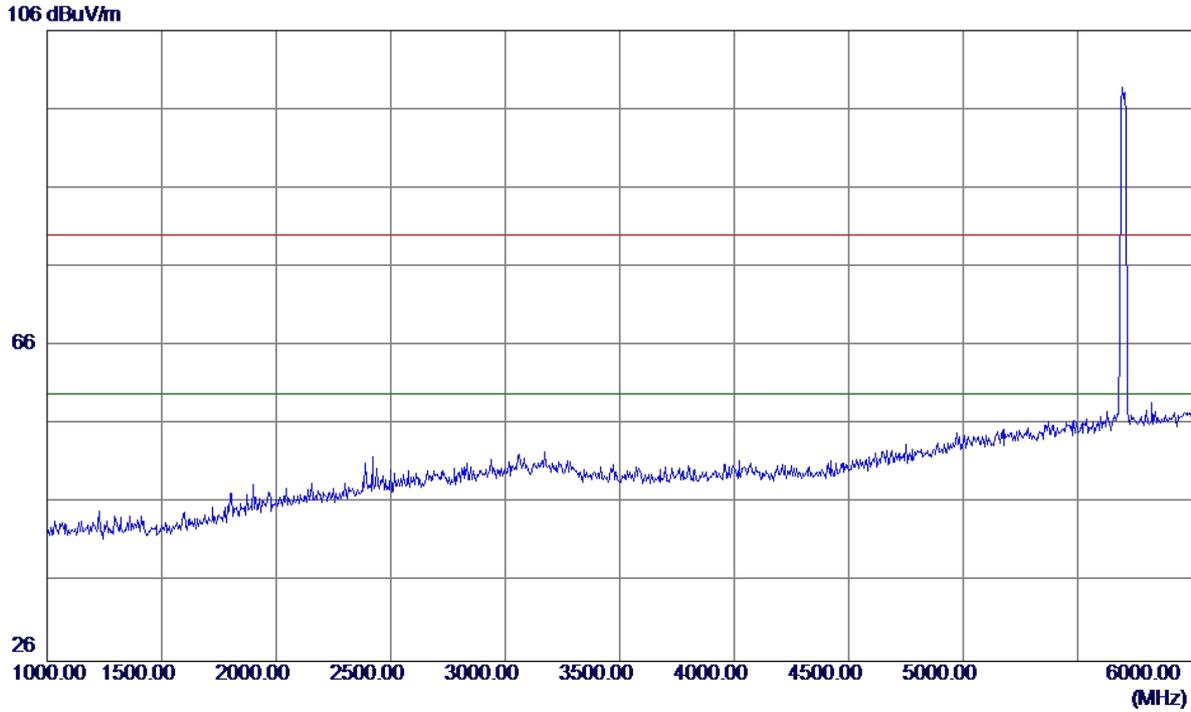


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

**Vertical**

100 dBuV/m

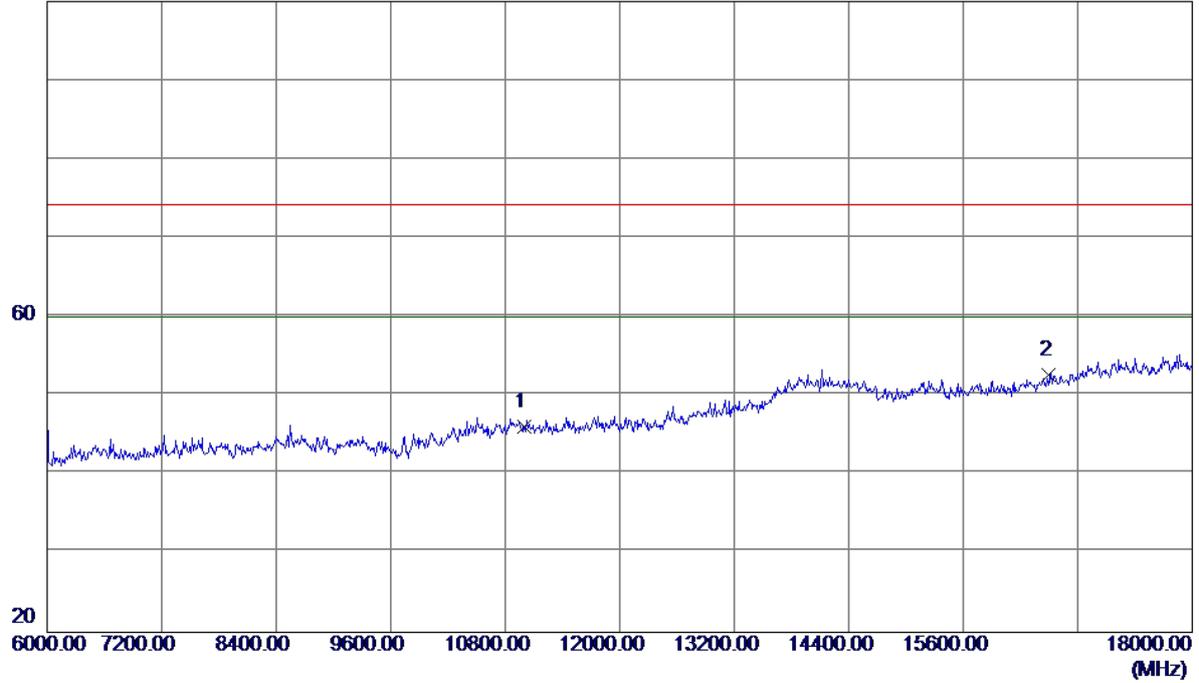


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	29.73	16.33	46.06	74.20	-28.14	Peak	
2 *	16500.0000	33.40	19.23	52.63	74.20	-21.57	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

**Vertical**

100 dBuV/m

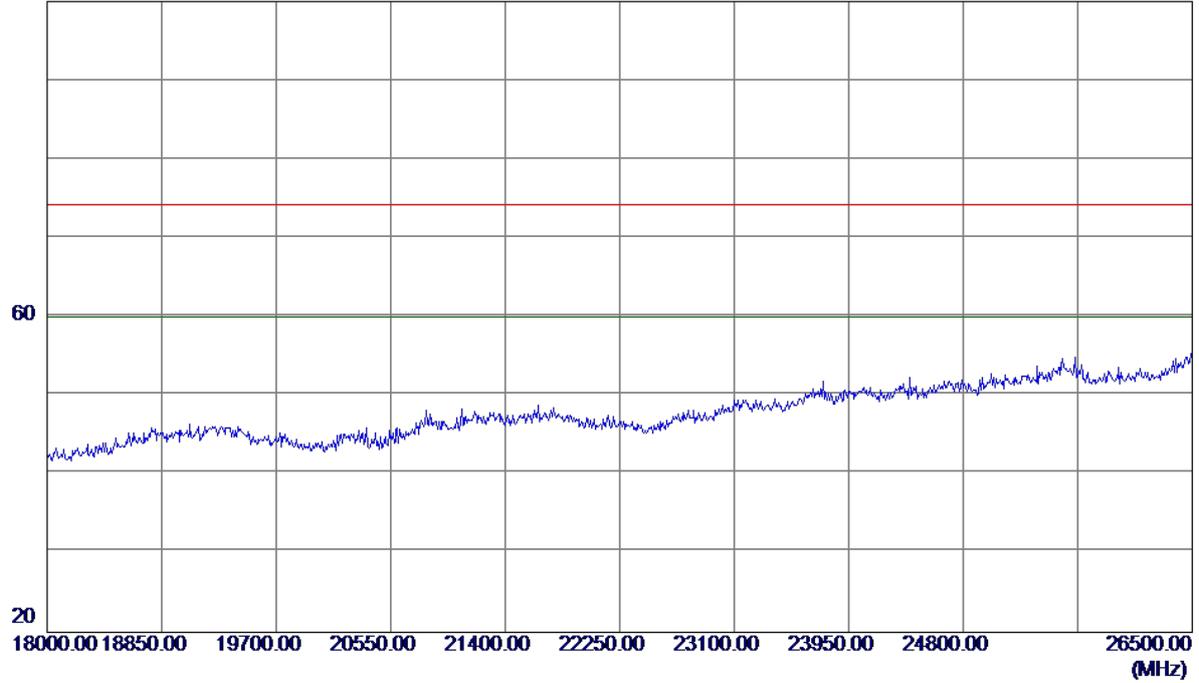


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment



Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

**Horizontal**


125 dBuV/m

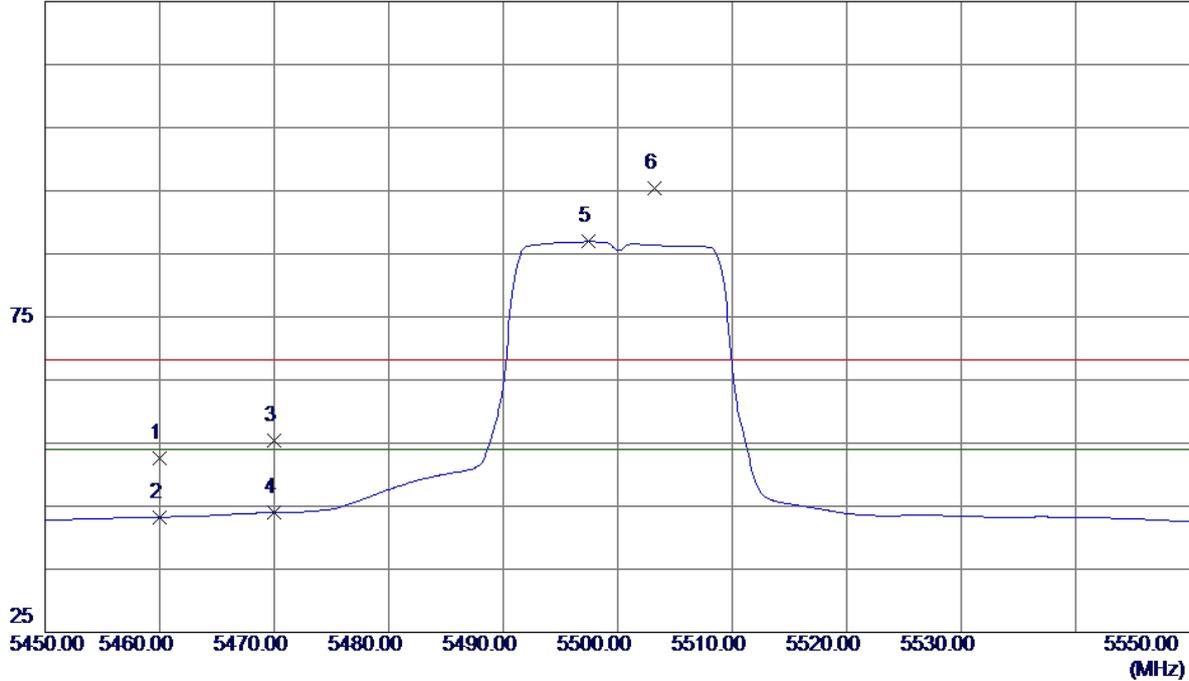

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	10.99	41.65	52.64	68.30	-15.66	Peak	
2	5460.0000	1.62	41.65	43.27	54.00	-10.73	AVG	
3	5470.0000	13.72	41.68	55.40	68.30	-12.90	Peak	
4	5470.0000	2.28	41.68	43.96	54.00	-10.04	AVG	
5 *	5497.4000	45.14	41.77	86.91	54.00	32.91	AVG	No Limit
6	5503.2000	53.70	41.79	95.49	68.30	27.19	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

**Horizontal**

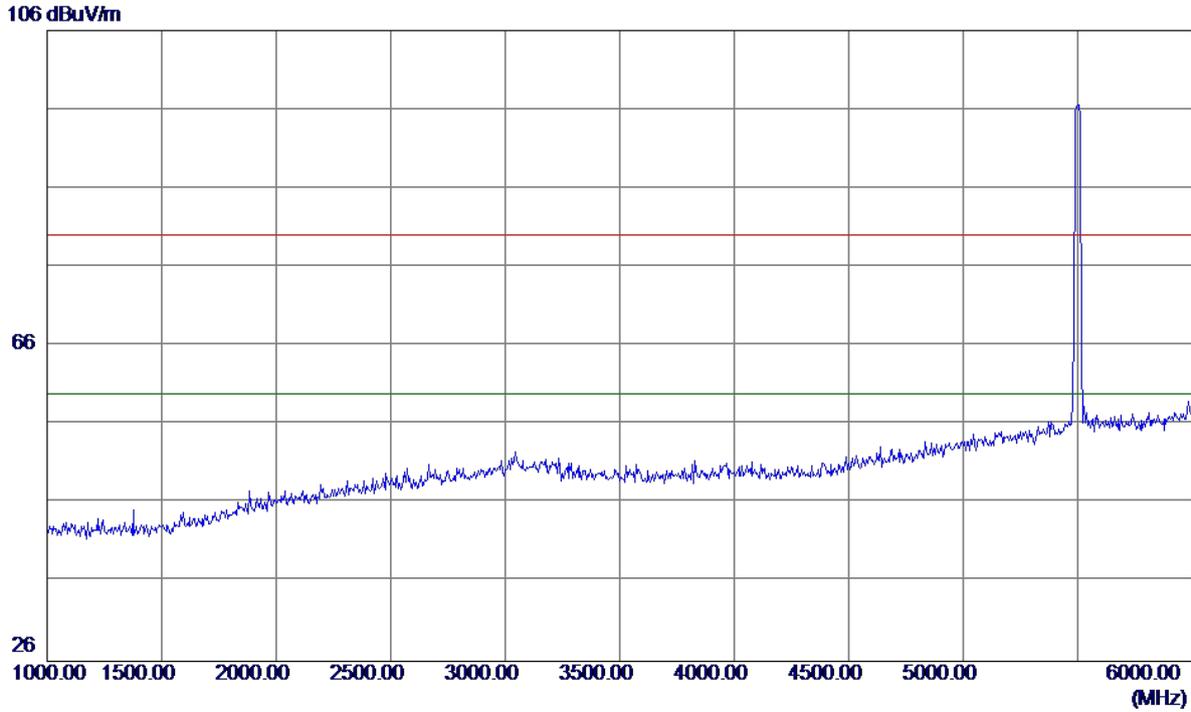


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

**Horizontal**

100 dBuV/m

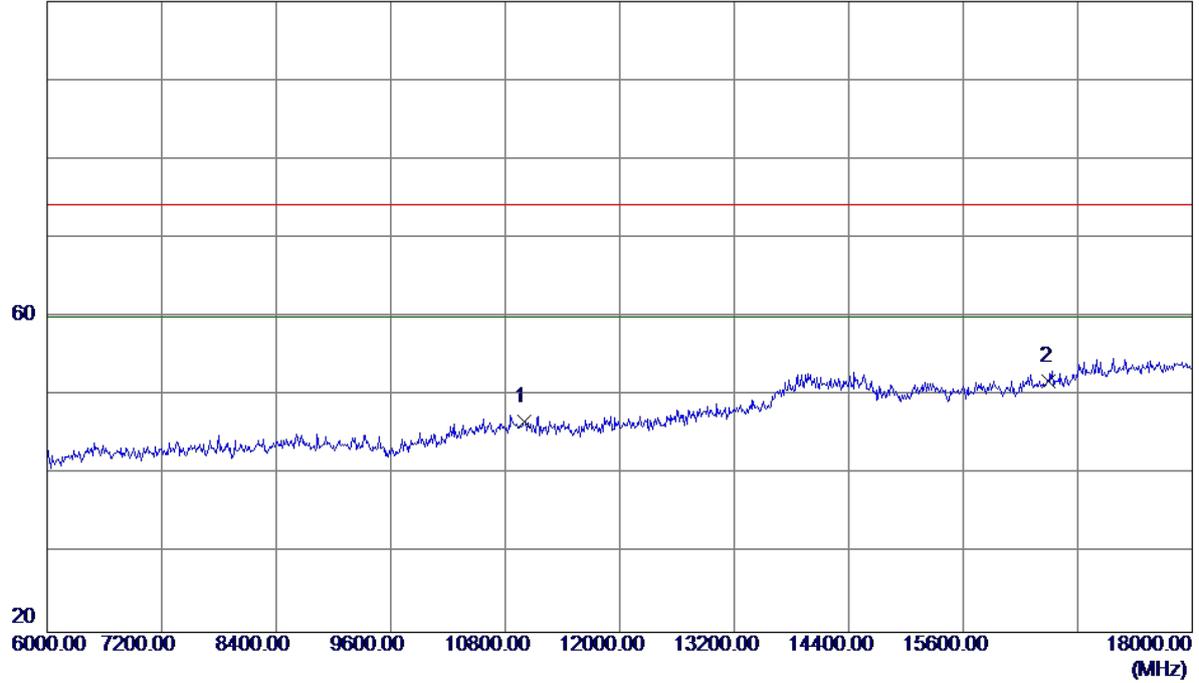


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	30.35	16.33	46.68	74.20	-27.52	Peak	
2 *	16500.0000	32.66	19.23	51.89	74.20	-22.31	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

**Horizontal**


100 dBuV/m

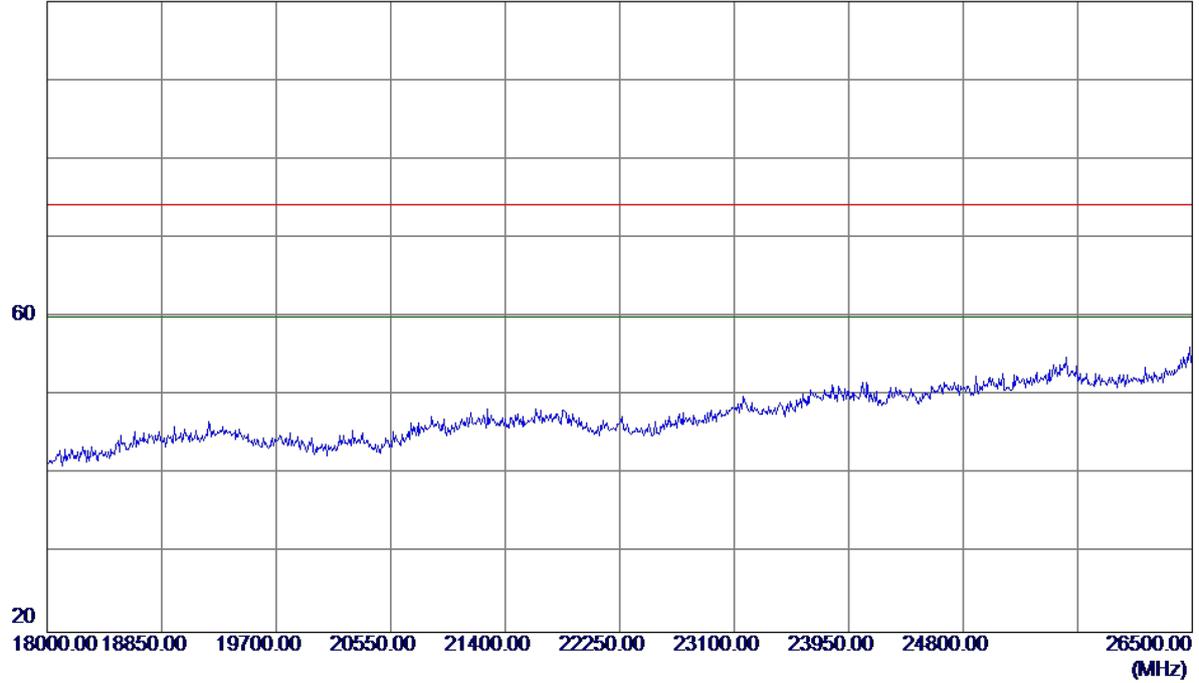

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

**Horizontal**

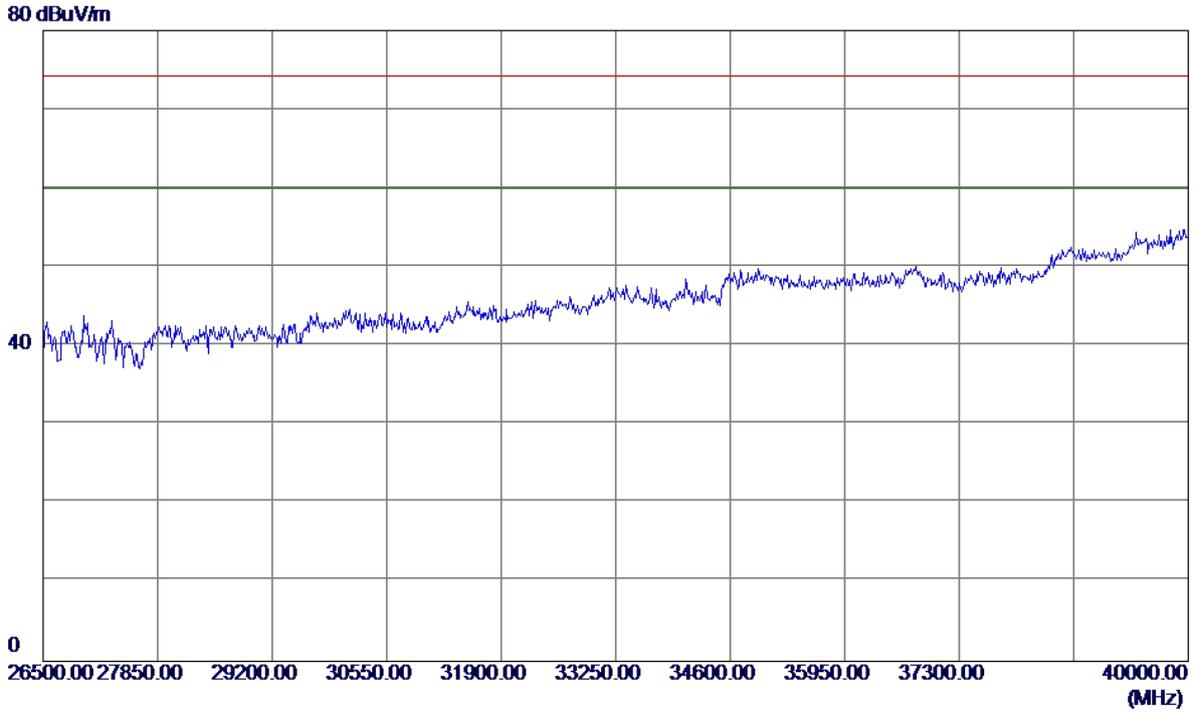


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

**Vertical**


125 dBuV/m

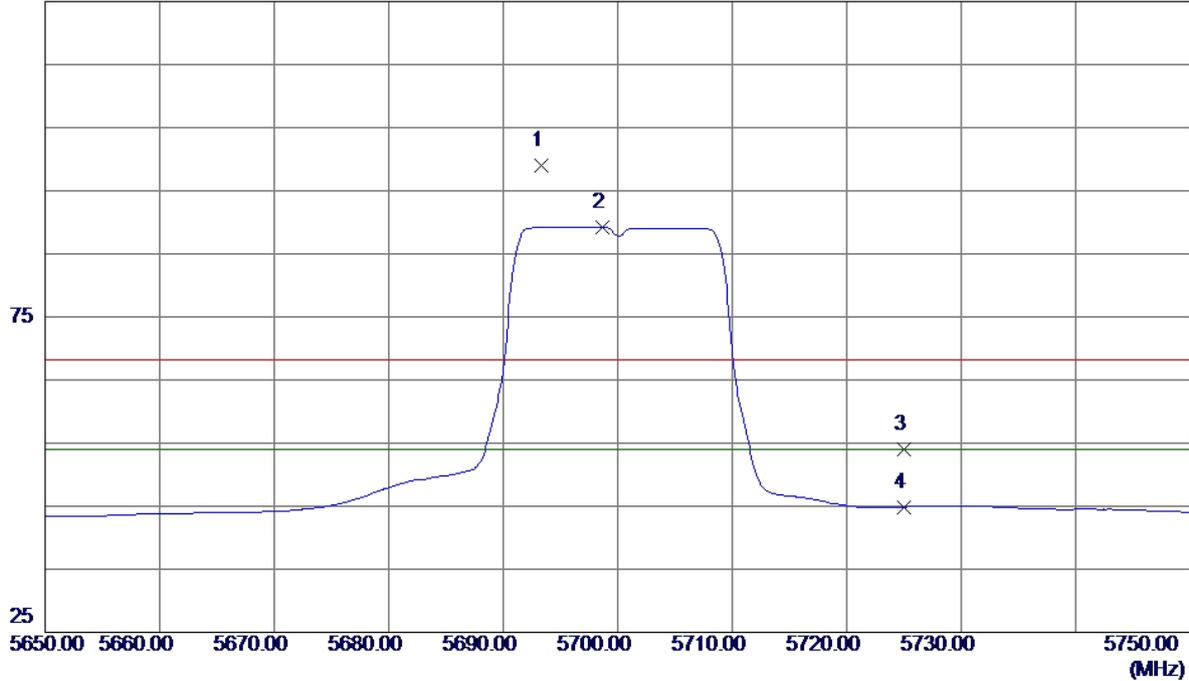

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5693.3000	56.46	42.47	98.93	68.30	30.63	Peak	No Limit
2 *	5698.7000	46.80	42.49	89.29	54.00	35.29	AVG	No Limit
3	5725.0000	11.49	42.58	54.07	68.30	-14.23	Peak	
4	5725.0000	2.30	42.58	44.88	54.00	-9.12	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

**Vertical**

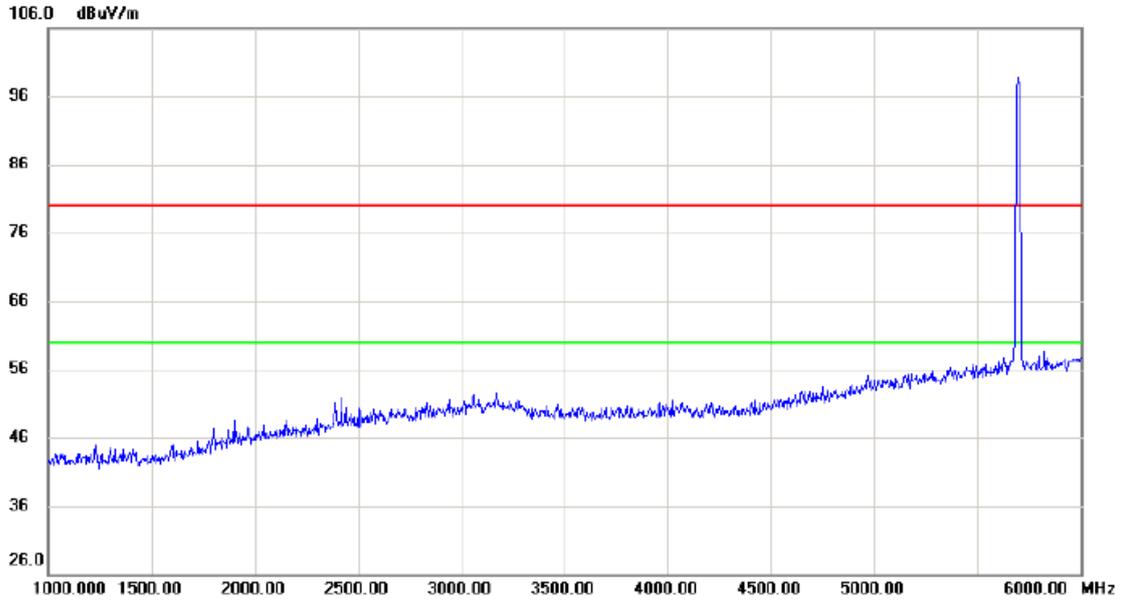


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
		5700.00	~98	0	~98	~78	~20		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

**Vertical**

100 dBuV/m

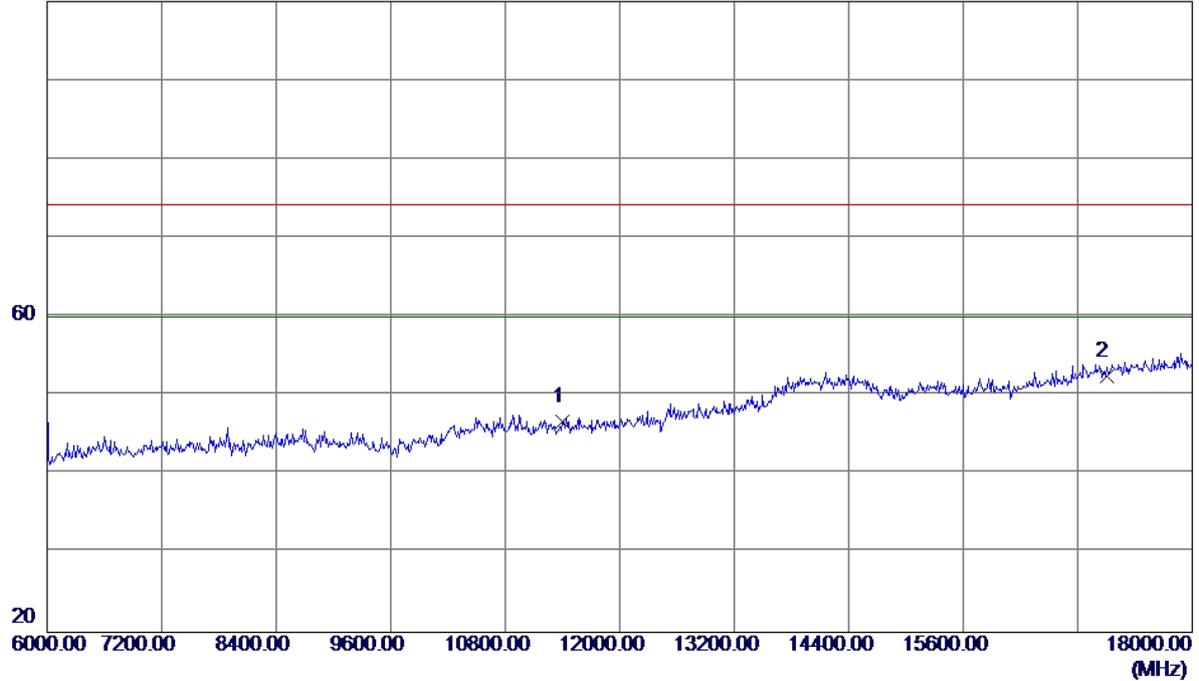


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	30.74	16.03	46.77	74.20	-27.43	Peak	
2 *	17100.0000	30.43	22.09	52.52	74.20	-21.68	Peak	



Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

**Vertical**

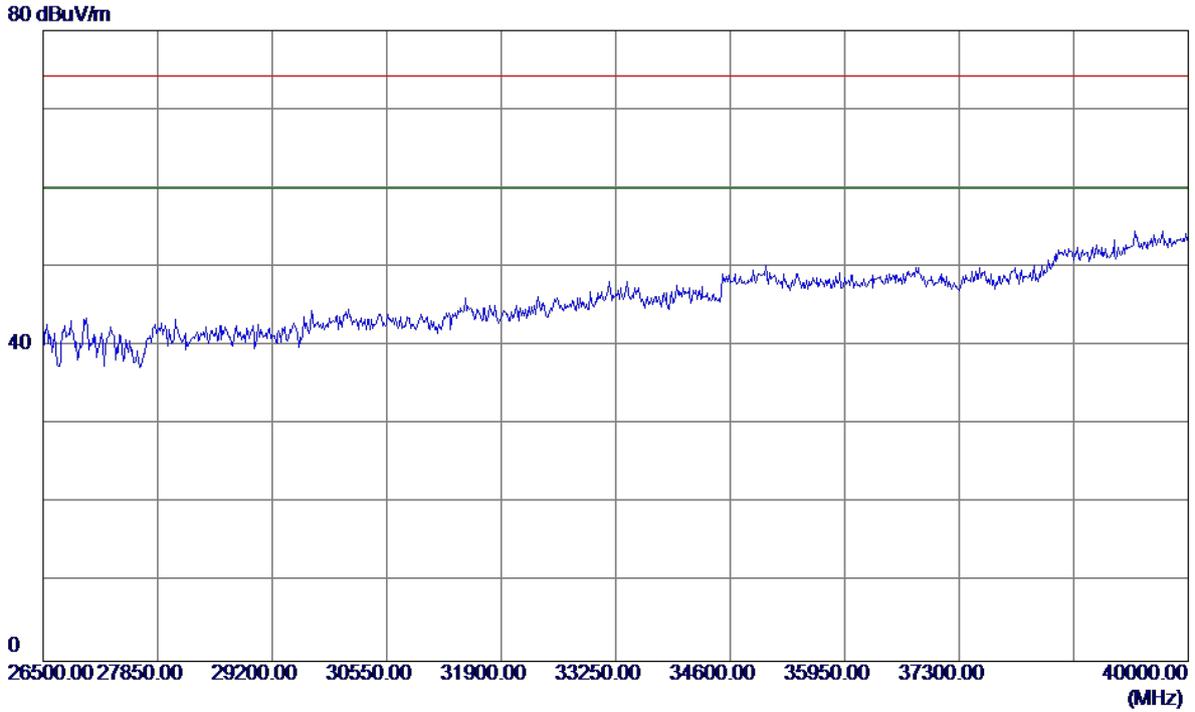


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

**Horizontal**


125 dBuV/m

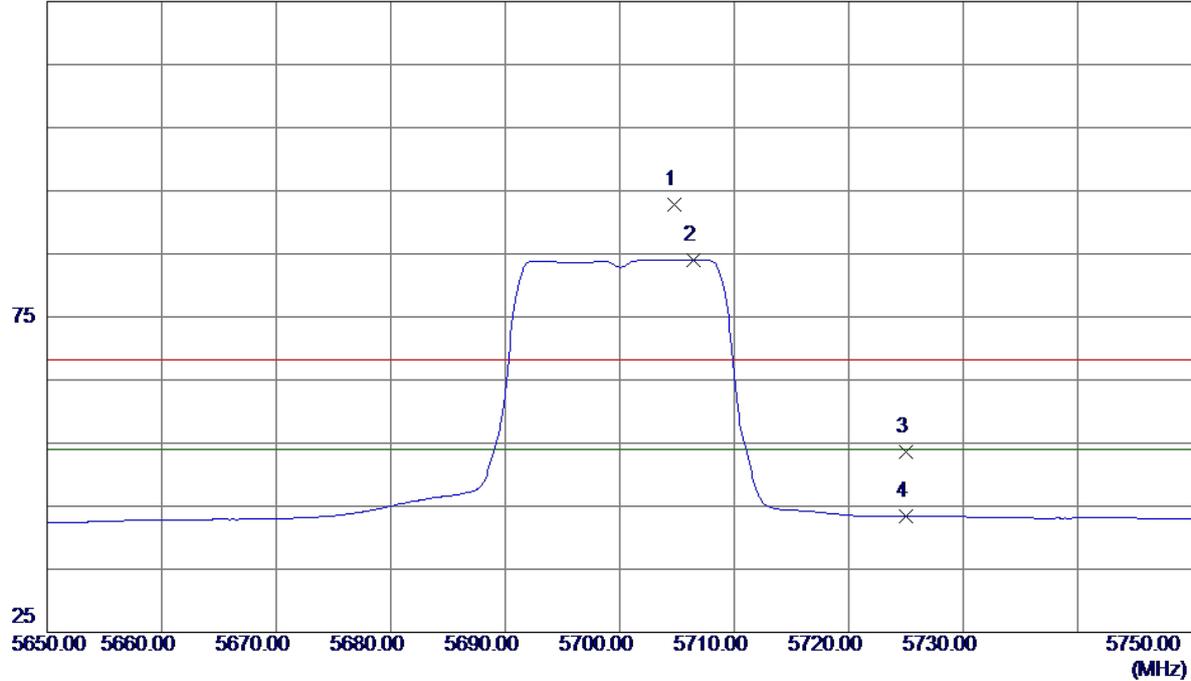

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5704.8000	50.24	42.51	92.75	68.30	24.45	Peak	No Limit
2 *	5706.4000	41.49	42.51	84.00	54.00	30.00	AVG	No Limit
3	5725.0000	11.04	42.58	53.62	68.30	-14.68	Peak	
4	5725.0000	0.84	42.58	43.42	54.00	-10.58	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

**Horizontal**

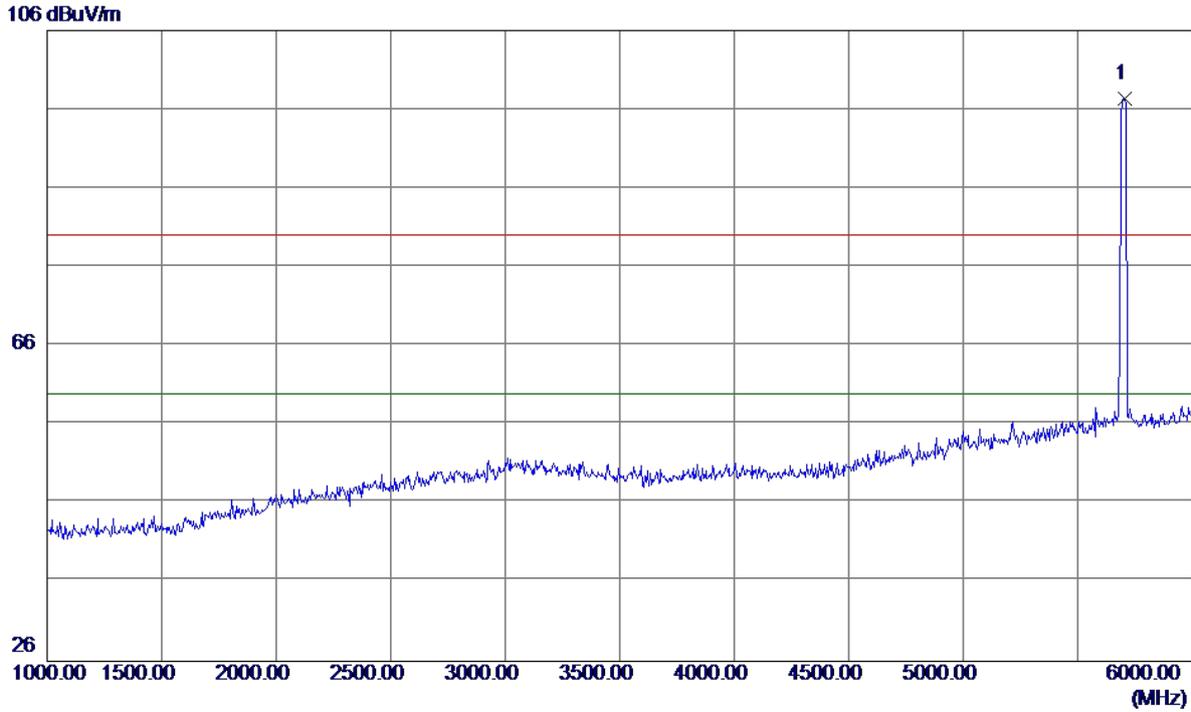


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5705.0000	79.48	17.95	97.43	80.00	17.43	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

**Horizontal**

100 dBuV/m

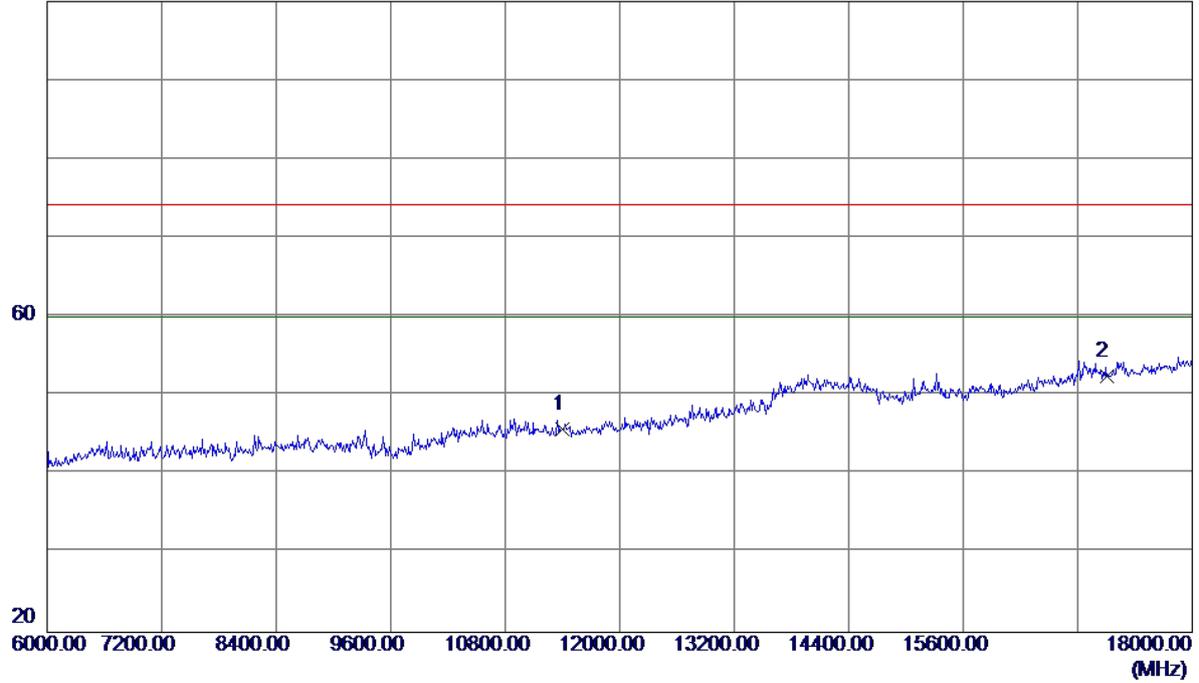


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	29.71	16.03	45.74	74.20	-28.46	Peak	
2 *	17100.0000	30.39	22.09	52.48	74.20	-21.72	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

**Horizontal**

100 dBuV/m

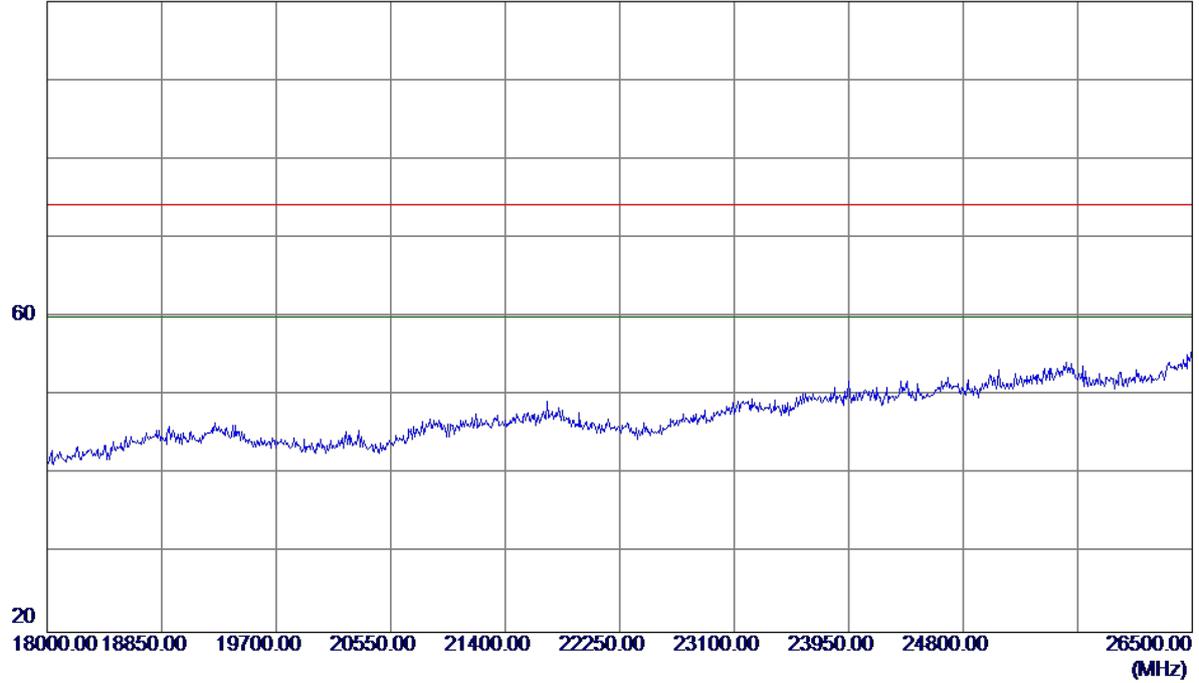


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment



Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

**Vertical**


125 dBuV/m

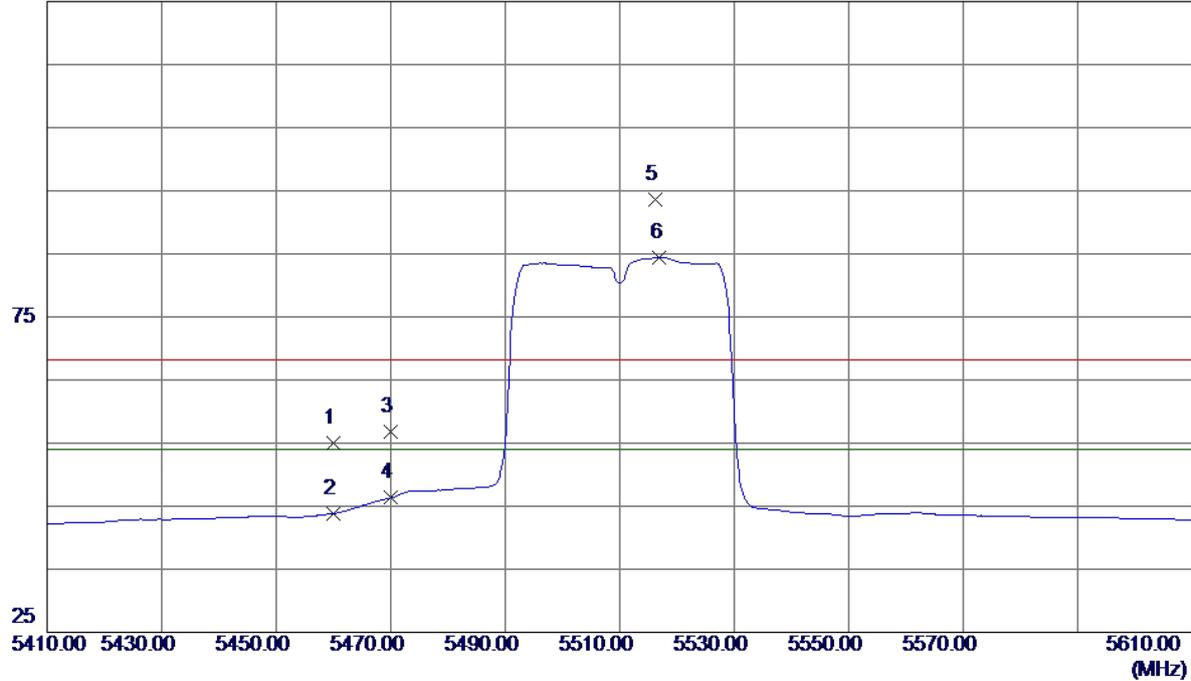

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	13.35	41.65	55.00	68.30	-13.30	Peak	
2	5460.0000	2.17	41.65	43.82	54.00	-10.18	AVG	
3	5470.0000	15.10	41.68	56.78	68.30	-11.52	Peak	
4	5470.0000	4.67	41.68	46.35	54.00	-7.65	AVG	
5	5516.2000	51.68	41.84	93.52	68.30	25.22	Peak	No Limit
6 *	5517.0000	42.58	41.84	84.42	54.00	30.42	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

**Vertical**

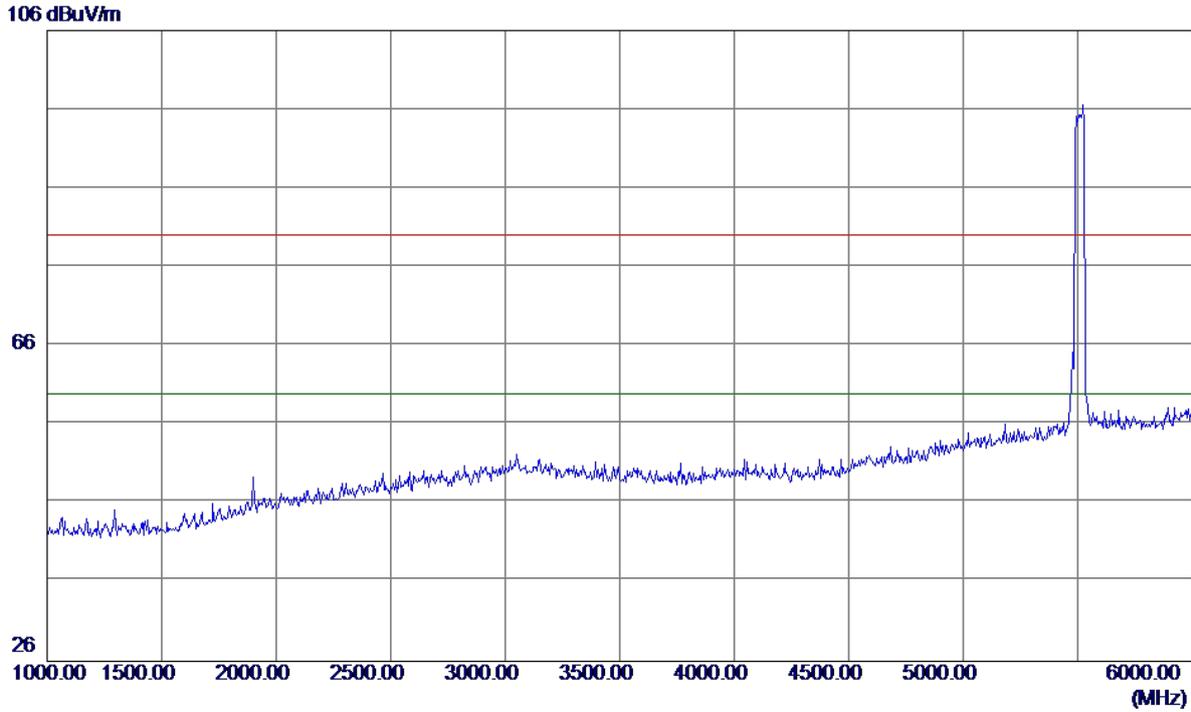


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

**Vertical**

100 dBuV/m

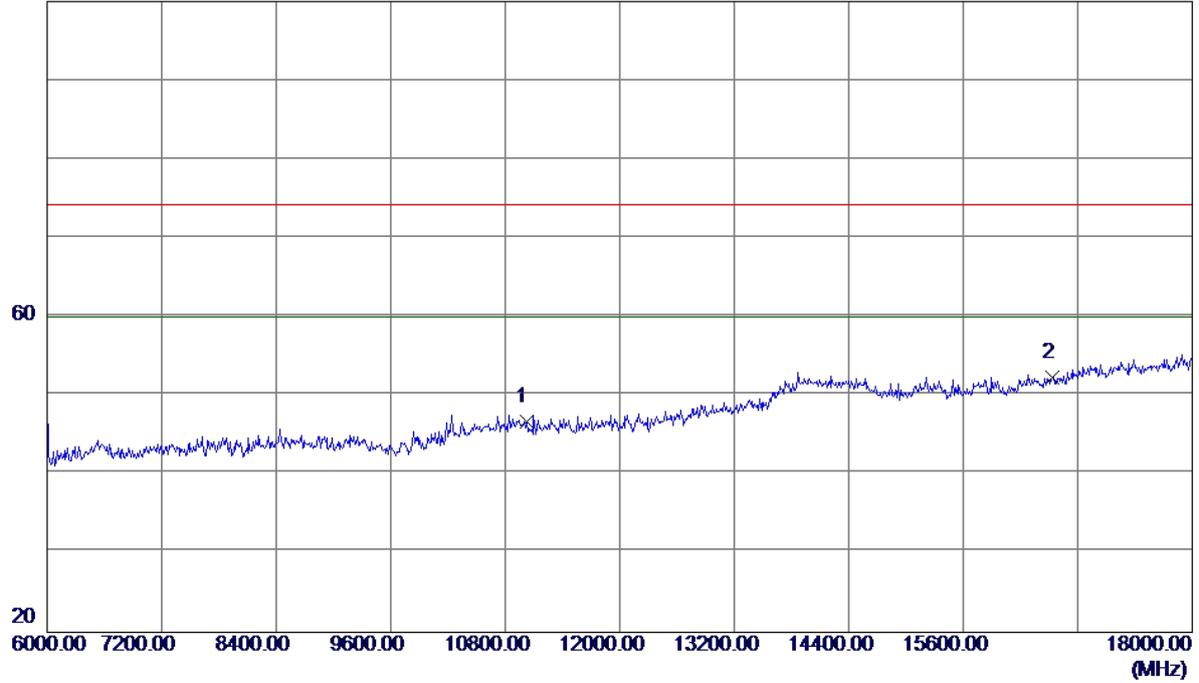


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	30.41	16.31	46.72	74.20	-27.48	Peak	
2 *	16530.0000	32.87	19.38	52.25	74.20	-21.95	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

**Vertical**


100 dBuV/m

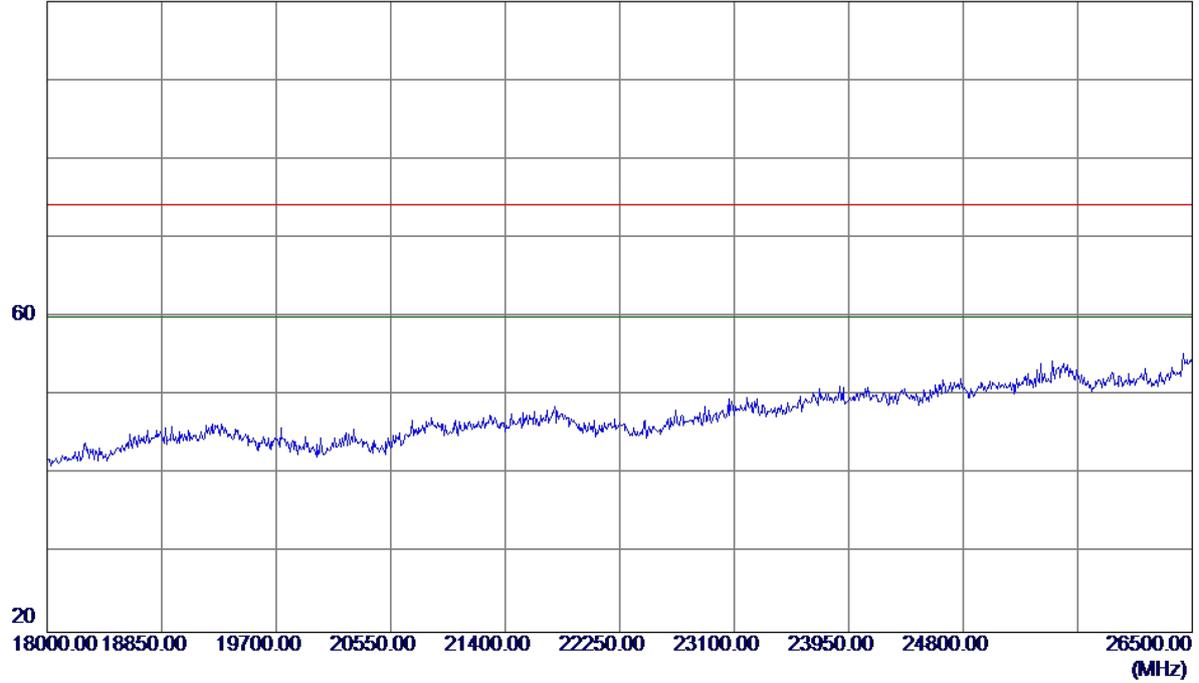

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

**Vertical**

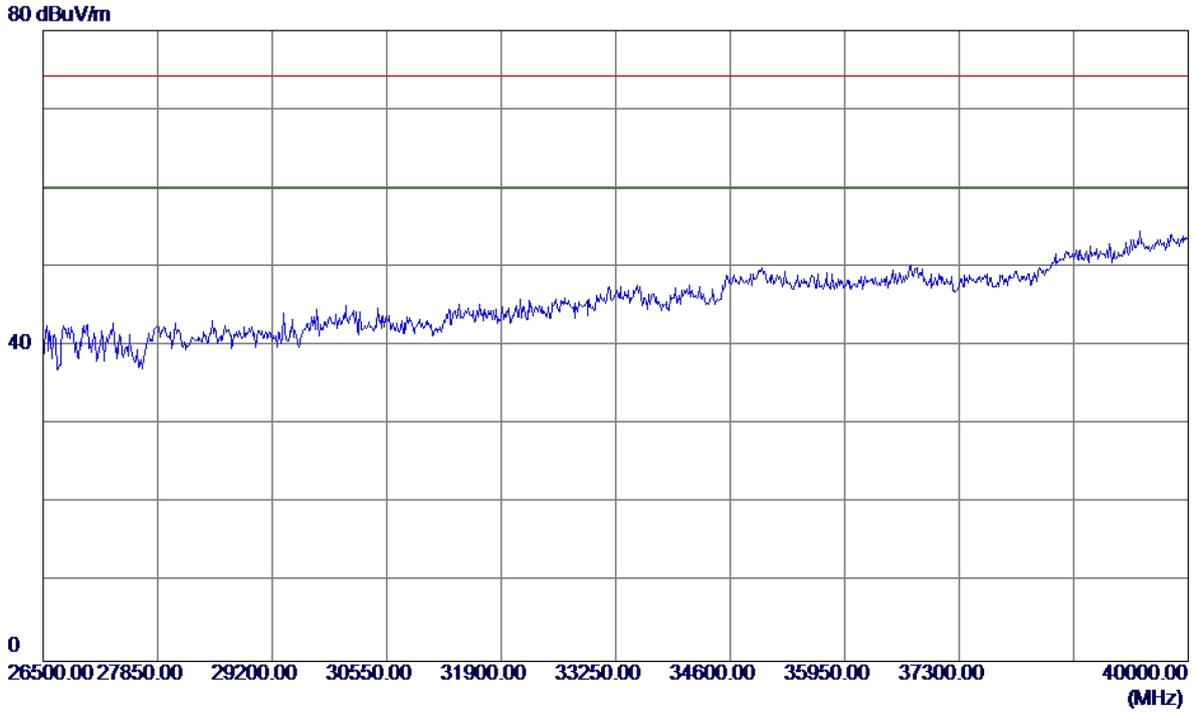


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

**Horizontal**


125 dBuV/m

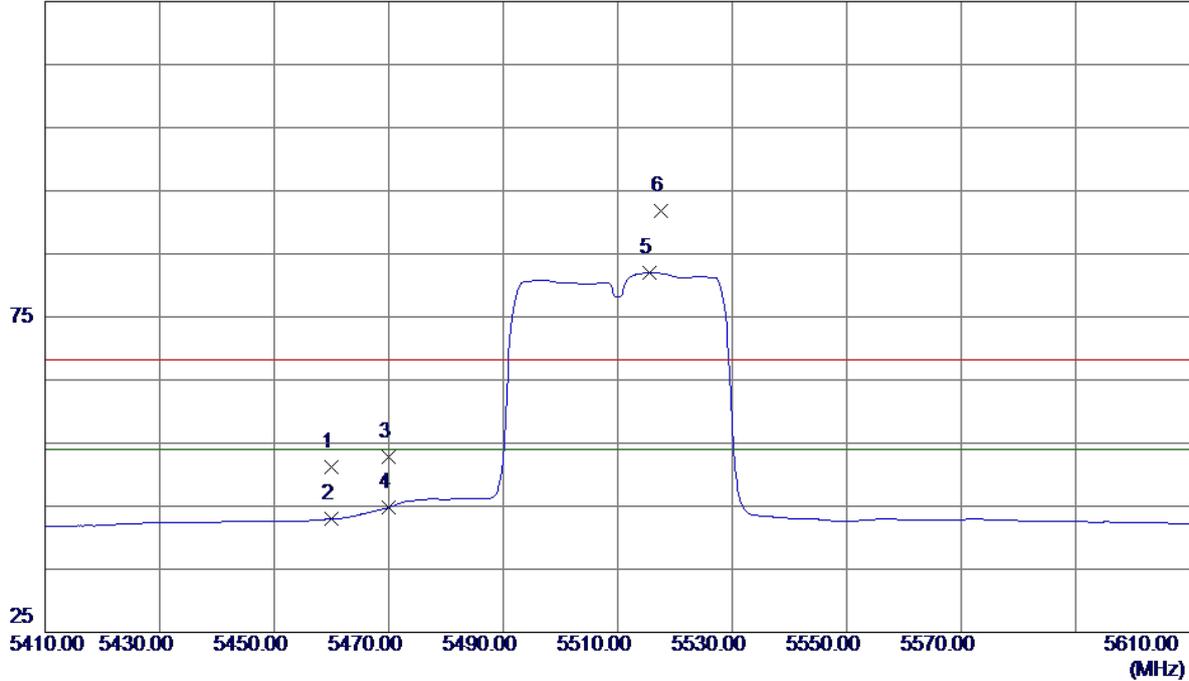

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	9.63	41.65	51.28	68.30	-17.02	Peak	
2	5460.0000	1.29	41.65	42.94	54.00	-11.06	AVG	
3	5470.0000	11.20	41.68	52.88	68.30	-15.42	Peak	
4	5470.0000	3.12	41.68	44.80	54.00	-9.20	AVG	
5 *	5515.6000	40.16	41.84	82.00	54.00	28.00	AVG	No Limit
6	5517.6000	49.94	41.84	91.78	68.30	23.48	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz


**Horizontal**

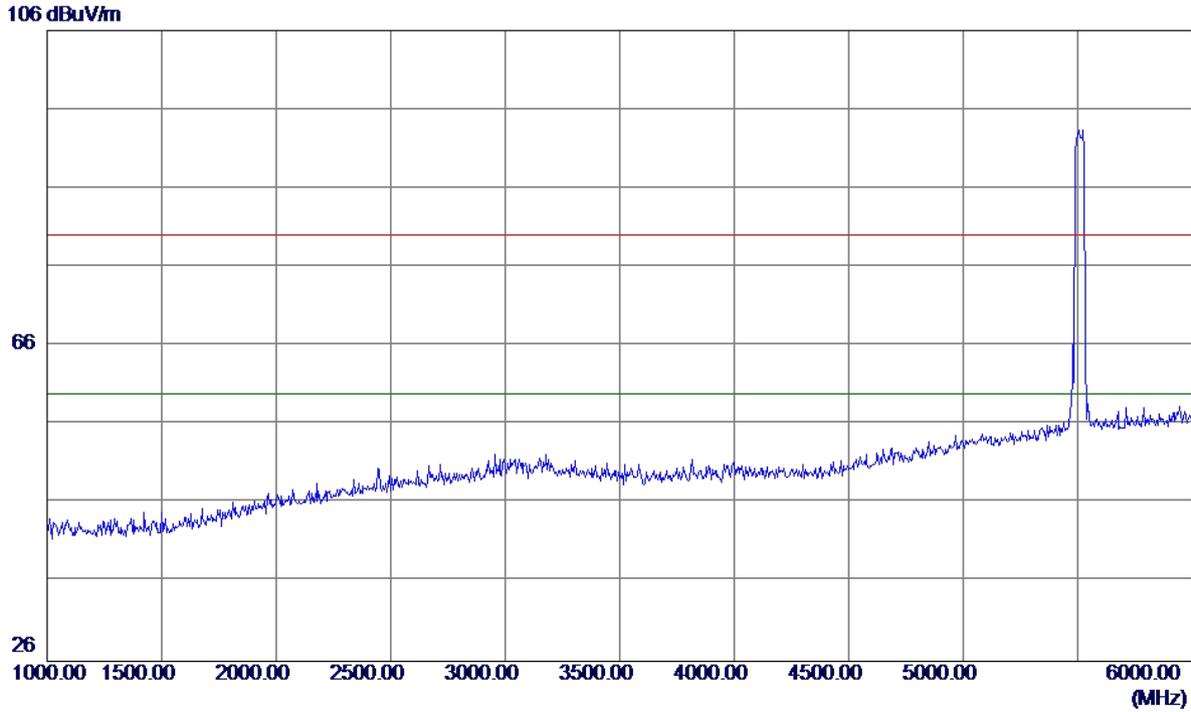

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

**Horizontal**

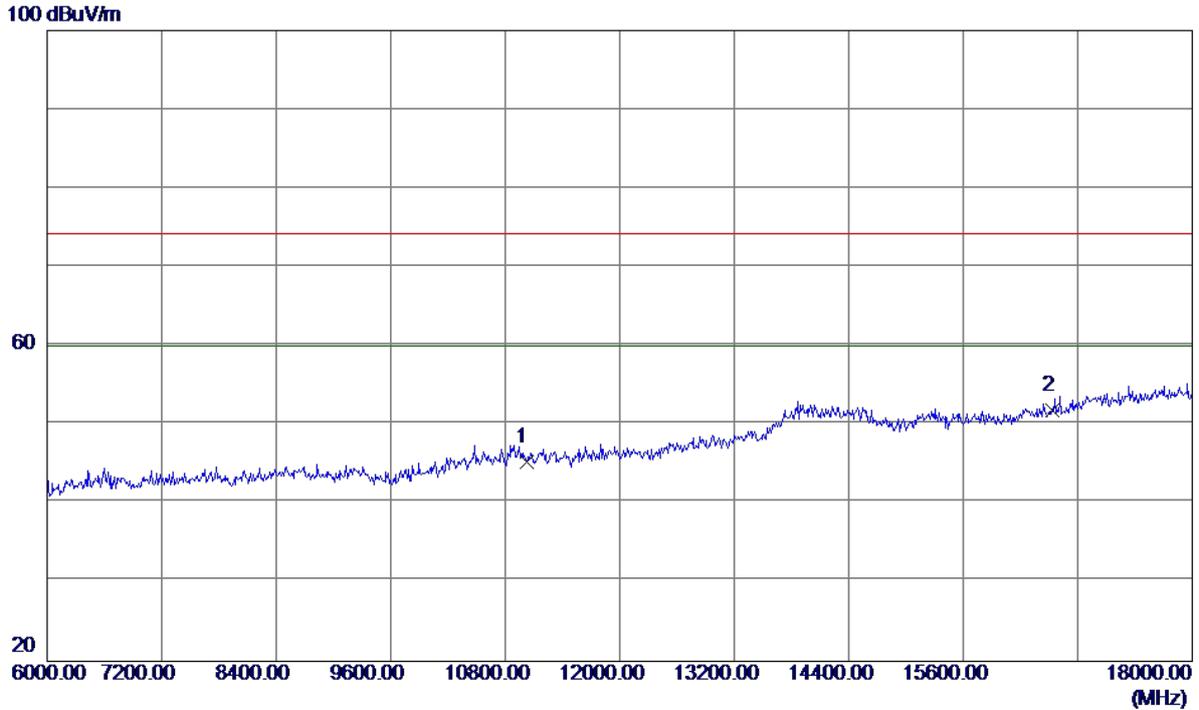

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	28.94	16.31	45.25	74.20	-28.95	Peak	
2 *	16530.0000	32.54	19.38	51.92	74.20	-22.28	Peak	