

FCC Radio Test Report

FCC ID: QISWAS-LX1A

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1612C249
Equipment : Smart Phone
Model Name : WAS-LX1A
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Dec. 29, 2016
Date of Test : Dec. 29, 2016 ~ Jan. 16, 2017
Issued Date : Jan. 17, 2017
Tested by : BTL Inc.

Testing Engineer : Shawn Xiao
(Shawn Xiao)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION	14
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP	15
4.1.5 EUT OPERATING CONDITIONS	15
4.1.6 EUT TEST CONDITIONS	15
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 EUT TEST CONDITIONS	19
4.2.7 TEST RESULTS (9K TO 30MHz)	20
4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	20
4.2.9 TEST RESULTS (ABOVE 1000 MHz)	20
5 . MEASUREMENT INSTRUMENTS LIST	21
6 . EUT TEST PHOTOS	22
ATTACHMENT A - CONDUCTED EMISSION	27
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	32
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	41
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	66

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1612C249	Original Issue.	Jan. 17, 2017

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : WAS-LX1A
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Factory : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Date of Test : Dec. 29, 2016 ~ Jan. 16, 2017
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1612C249) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E(15.407)			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.407(a)	Radiated Emissions	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	1.94

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz~30MHz	V	3.79
		9kHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.60
		200MHz ~ 1,000MHz	V	3.86
		200MHz ~ 1,000MHz	H	3.94
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone			
Brand Name	HUAWEI			
Model Name	WAS-LX1A			
Mode Different	N/A			
Product Description	Operation Frequency	UNII-1: 5150-5250MHz UNII-2A: 5250-5350MHz UNII-2C: 5470-5725MHz		
	Modulation Type	OFDM		
	Bit Rate of Transmitter	300Mbps		
Power Source	#1 DC Voltage supplied from AC/DC adapter. #2 Battery Supplied.			
Power Rating	#1 Input: 100-240V Output: 9V/5V 2A #2 DC 3.82V 2900mAh			
Frequency	Mode		Work Frequency	
			Transmit Frequency	
			Receive Frequency	
	GSM	GSM850	824 - 849	869 - 894
		PCS1900	1850-1910	1930-1990
	UMTS	Band 2	1850-1910	1930-1990
		Band 5	824 - 849	869 - 894
LTE	Band 7	2500-2570	2620-2690	
Wi-Fi 2.4G		2400-2483.5	2400-2483.5	
Wi-Fi 5G		5150~5350 5470~5725	5150~5350 5470~5725	
HW Version	HL3WASM			
SW Version	WAS-LX1AC900B083			

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. The EUT contains following accessory devices

Item	Mfr/Brand	Model.
Battery	Sunwoda Electronic Co., LTD	HB366481ECW
	Desay Battery Co., Ltd.	HB366481ECW
USB Cable	SHEN ZHEN PANG NGAI INDUSTRIAL CO., LTD.	H09-000577
	CONNREX (SHEN ZHEN) INDUSTRIAL.,LTD.	CD-U0405-1143
	LUXSHARE-ICT Co., Ltd.	L99U2013-CS-H
	FOXCONN INTERCONNECT TECHNOLOGY	CUBB01M-HC208-DH
Earphone	JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD	MEMD1632B580C00
	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD	1311-3291-3.5mm-229
	Goer Tek Inc	NA12
	MERRY ELECTRONICS (SHENZHEN) CO., LTD.	EMC309-001
Adapter	Salcomp (Shenzhen)Co.,Ltd	HW-059200UHQ
	HUIZHOU BYD ELECTRONIC CO., LTD.	

3. Channel List:

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH52, CH60, CH64 (UNII-2A)
Mode 8	TX N20 Mode / CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N40 Mode / CH54, CH62 (UNII-2A)
Mode 10	TX AC20 Mode / CH52, CH60, CH64 (UNII-2A)
Mode 11	TX AC40 Mode / CH54, CH62 (UNII-2A)
Mode 12	TX AC80 Mode / CH58 (UNII-2A)
Mode 13	TX A Mode / CH100, CH116, CH140 (UNII-2C)
Mode 14	TX N20 Mode / CH100, CH116, CH140 (UNII-2C)
Mode 15	TX N40 Mode / CH102, CH110, CH134 (UNII-2C)
Mode 16	TX AC20 Mode / CH100, CH116, CH140 (UNII-2C)
Mode 17	TX AC40 Mode / CH102, CH110, CH134 (UNII-2C)
Mode 18	TX AC80 Mode / CH106, CH122 (UNII-2C)
Mode 19	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:


For Conducted Test	
Final Test Mode	Description
Mode 19	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH52, CH60, CH64 (UNII-2A)
Mode 8	TX N20 Mode / CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N40 Mode / CH54, CH62 (UNII-2A)
Mode 10	TX AC20 Mode / CH52, CH60, CH64 (UNII-2A)
Mode 11	TX AC40 Mode / CH54, CH62 (UNII-2A)
Mode 12	TX AC80 Mode / CH58 (UNII-2A)
Mode 13	TX A Mode / CH100, CH116, CH140 (UNII-2C)
Mode 14	TX N20 Mode / CH100, CH116, CH140 (UNII-2C)
Mode 15	TX N40 Mode / CH102, CH110, CH134 (UNII-2C)
Mode 16	TX AC20 Mode / CH100, CH116, CH140 (UNII-2C)
Mode 17	TX AC40 Mode / CH102, CH110, CH134 (UNII-2C)
Mode 18	TX AC80 Mode / CH106, CH122 (UNII-2C)

Note:

(1) For radiated below 1GHz test, the 802.11a mode is found to be the worst case and recorded.

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

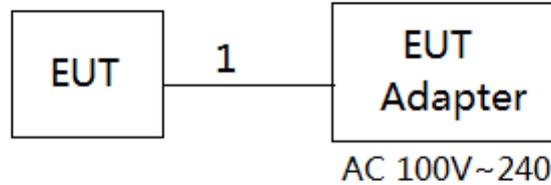

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.2m	USB Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

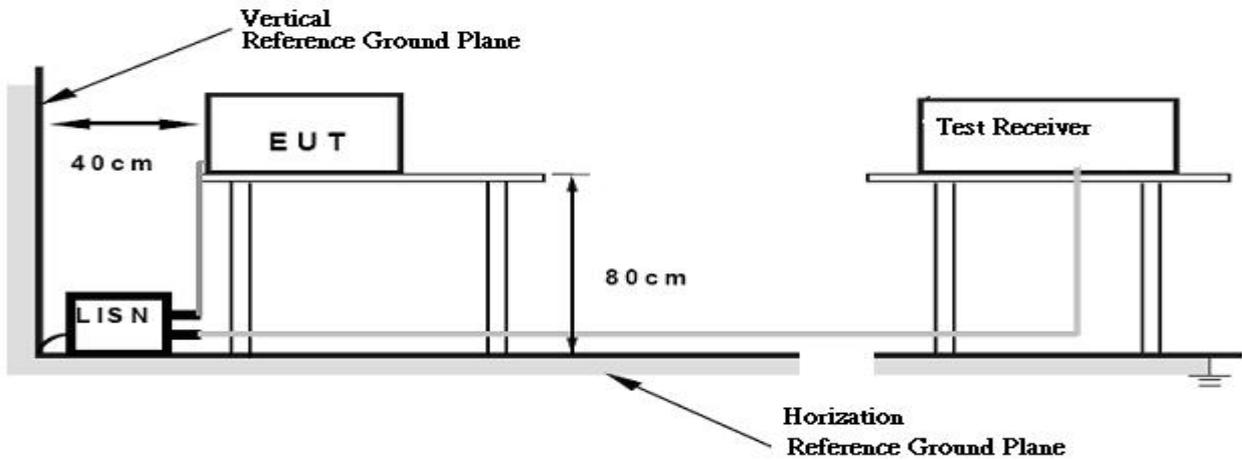

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.
 The EUT was programmed to be in continuously transmitting/TX Mode mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 23°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150kHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequencies (MHz)	EIRP Limit (dBm)	Band edge at 3m (dBμV/m)	Harmonic at 1.5m (dBμV/m)
5150-5250	-27	68.3	74.3 (Note 3)
5250-5350	-27	68.3	74.3 (Note 3)
5470-5725	-27	68.3	74.3 (Note 3)
5725-5850	-27(Note 2)	68.3	74.3 (Note 3)
	10(Note 2)	105.3	111.3(Note 3)
	15.6(Note 2)	110.9	116.9(Note 3)
	27(Note 2)	122.3	128.3(Note 3)

Note:

- The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength: $E = \frac{1000000\sqrt{30P}}{3}$ μV/m, where P is the eirp (Watts)
- According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

- $$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$$20 \log d_{\text{limit}}/d_{\text{measure}} = 20 \log 3/1.5 = 6 \text{dB}$$

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A)Radiated Emission Test Set-Up Frequency Below 1GHz

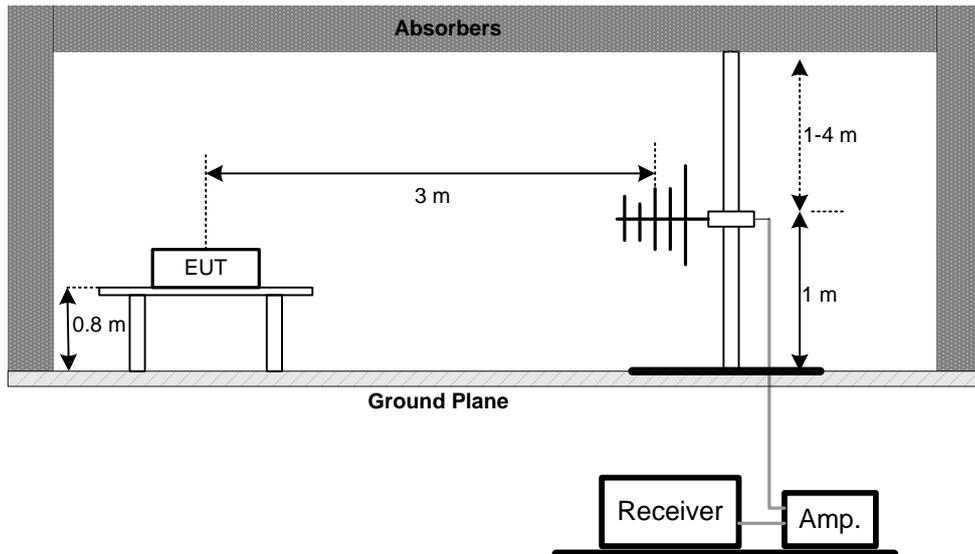


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz


Band edge

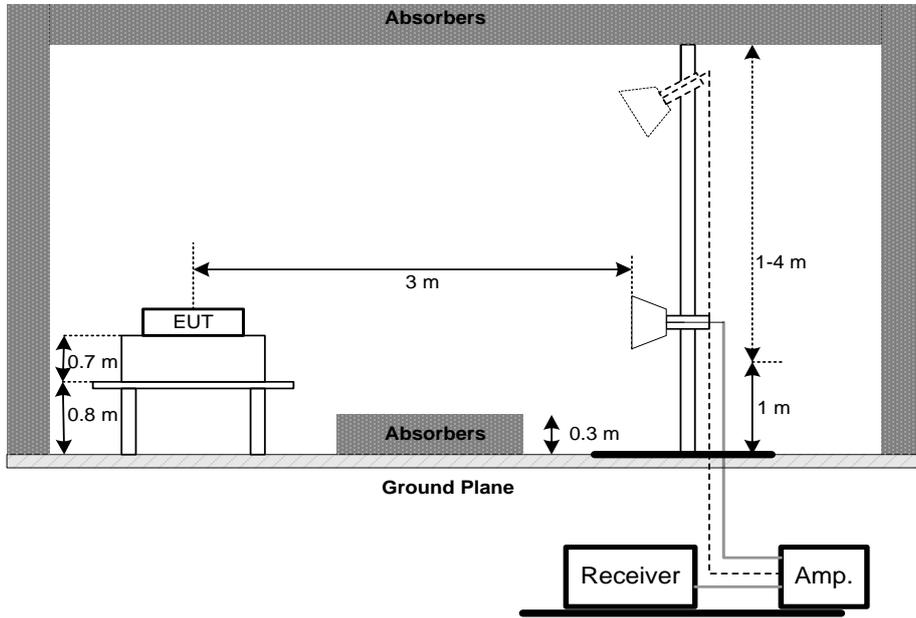

Harmonic

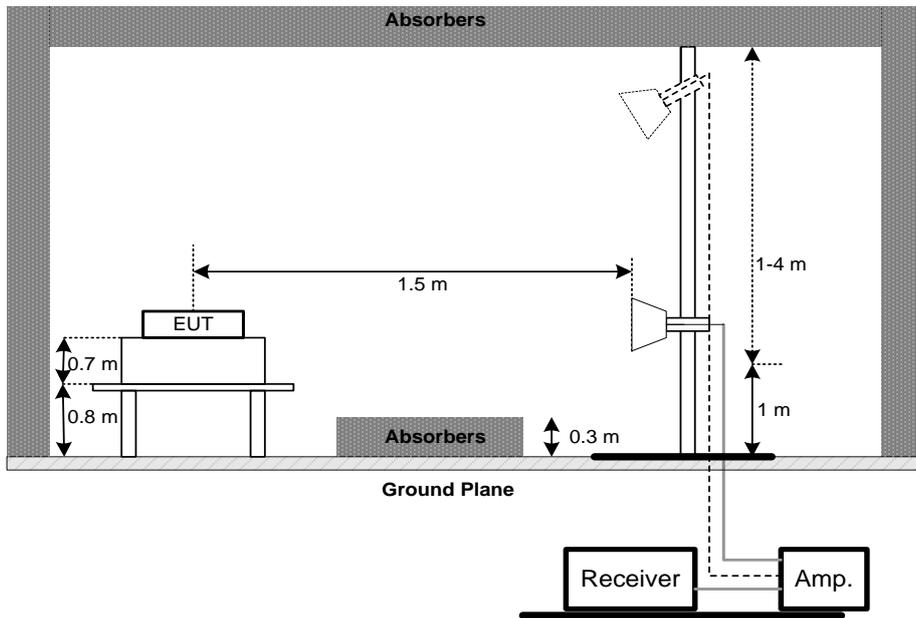

(C) Radiated emissions below 30MHz

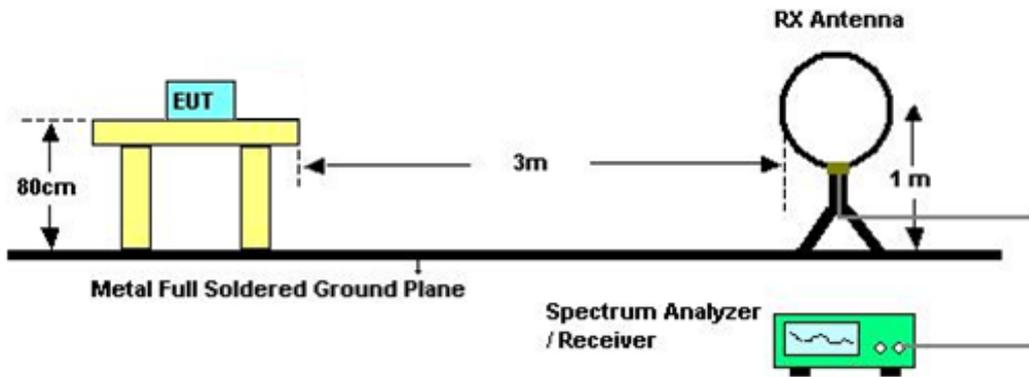

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log$ (specific distance / test distance) (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)

Please refer to the Attachment C.

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Attachment D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30 MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A


Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Nov. 08, 2017
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 10, 2017
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 26, 2017
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Antenna	ETS	3115	00075789	Mar. 27, 2017
8	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2017
9	Receiver	AGILENT	N9038A	MY52130039	Oct. 10, 2017
10	Test Cable	emci	EMC104-SM-S M-10000(1GHz-26.5GHz)	C-68	Jun. 26, 2017
11	Controller	CT	SC100	N/A	N/A
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 23, 2017
13	Microwave Pre-amplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 27, 2017
14	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 06, 2017
15	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX MODE_Adapter: Salcomp

Line

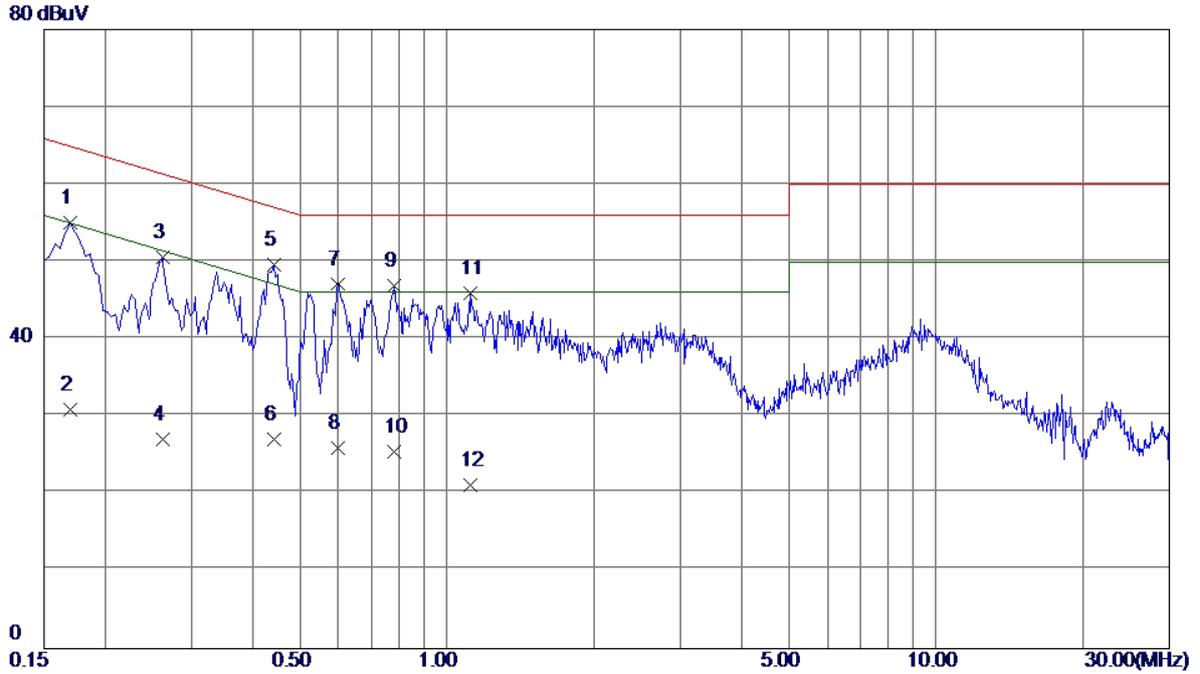


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1700	45.45	9.57	55.02	64.96	-9.94	Peak	
2	0.1700	21.30	9.57	30.87	54.96	-24.09	AVG	
3	0.2620	40.95	9.57	50.52	61.37	-10.85	Peak	
4	0.2620	17.52	9.57	27.09	51.37	-24.28	AVG	
5 *	0.4420	40.04	9.63	49.67	57.02	-7.35	Peak	
6	0.4420	17.40	9.63	27.03	47.02	-19.99	AVG	
7	0.5980	37.42	9.70	47.12	56.00	-8.88	Peak	
8	0.5980	16.20	9.70	25.90	46.00	-20.10	AVG	
9	0.7820	37.02	9.80	46.82	56.00	-9.18	Peak	
10	0.7820	15.60	9.80	25.40	46.00	-20.60	AVG	
11	1.1180	36.06	9.85	45.91	56.00	-10.09	Peak	
12	1.1180	11.30	9.85	21.15	46.00	-24.85	AVG	

Note : The test result has included the cable loss.

Test Mode: TX MODE_Adapter: Salcomp

Neutral

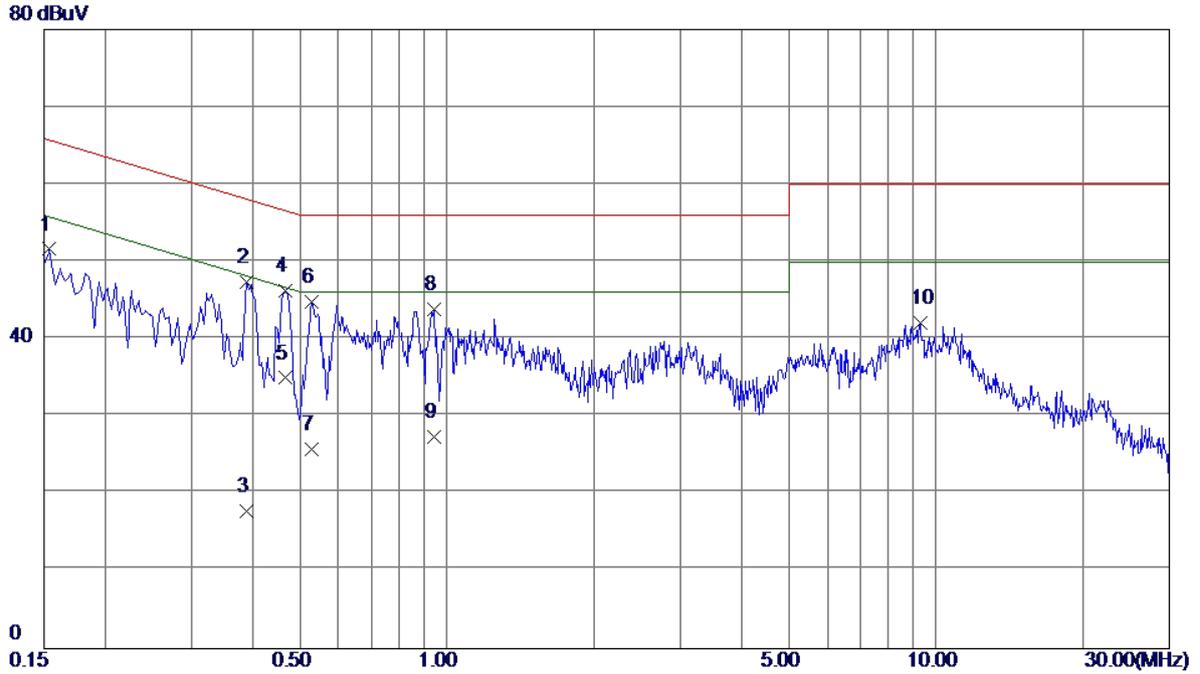


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1539	42.05	9.55	51.60	65.79	-14.19	Peak	
2	0.3899	37.93	9.50	47.43	58.07	-10.64	Peak	
3	0.3899	8.20	9.50	17.70	48.07	-30.37	AVG	
4 *	0.4660	36.82	9.49	46.31	56.58	-10.27	Peak	
5	0.4660	25.47	9.49	34.96	46.58	-11.62	AVG	
6	0.5299	35.34	9.49	44.83	56.00	-11.17	Peak	
7	0.5299	16.30	9.49	25.79	46.00	-20.21	AVG	
8	0.9420	34.07	9.73	43.80	56.00	-12.20	Peak	
9	0.9420	17.57	9.73	27.30	46.00	-18.70	AVG	
10	9.2860	31.57	10.50	42.07	60.00	-17.93	Peak	

Note : The test result has included the cable loss.

Test Mode: TX MODE_Adapter: BYD

Line

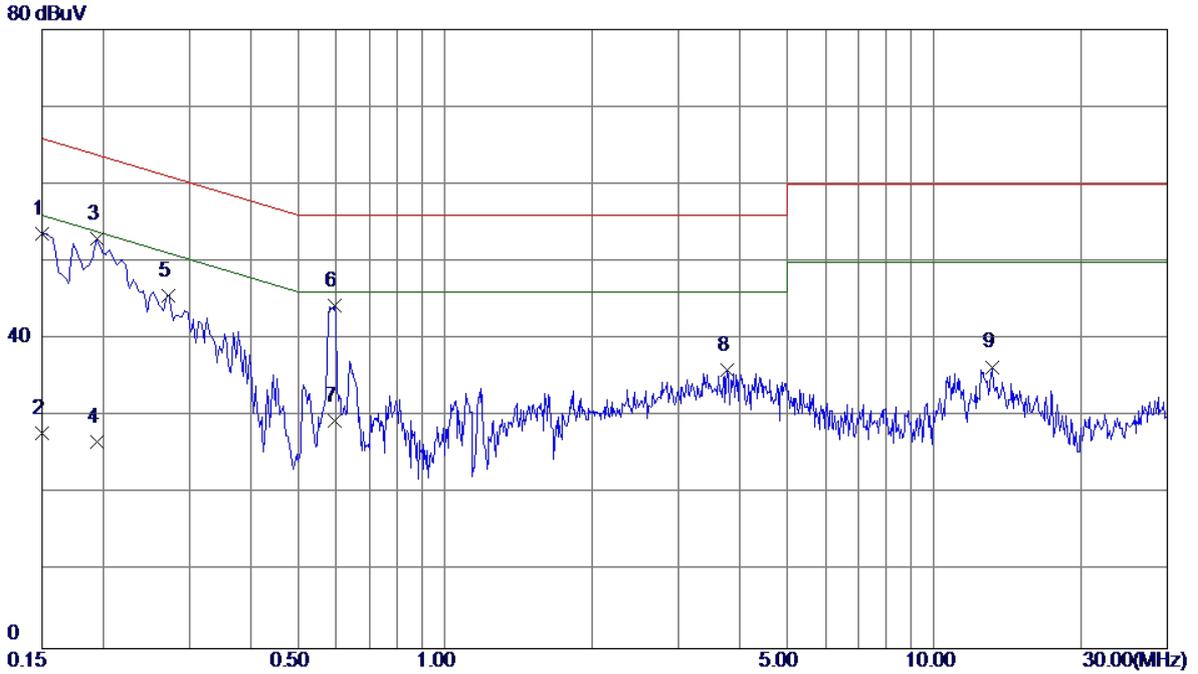


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	44.08	9.57	53.65	66.00	-12.35	Peak	
2	0.1500	18.25	9.57	27.82	56.00	-28.18	AVG	
3 *	0.1940	43.31	9.57	52.88	63.86	-10.98	Peak	
4	0.1940	17.20	9.57	26.77	53.86	-27.09	AVG	
5	0.2714	36.08	9.57	45.65	61.07	-15.42	Peak	
6	0.5940	34.59	9.70	44.29	56.00	-11.71	Peak	
7	0.5940	19.77	9.70	29.47	46.00	-16.53	AVG	
8	3.7780	25.66	10.36	36.02	56.00	-19.98	Peak	
9	13.1660	25.78	10.62	36.40	60.00	-23.60	Peak	

Note : The test result has included the cable loss.

Test Mode: TX MODE_Adapter: BYD

Neutral

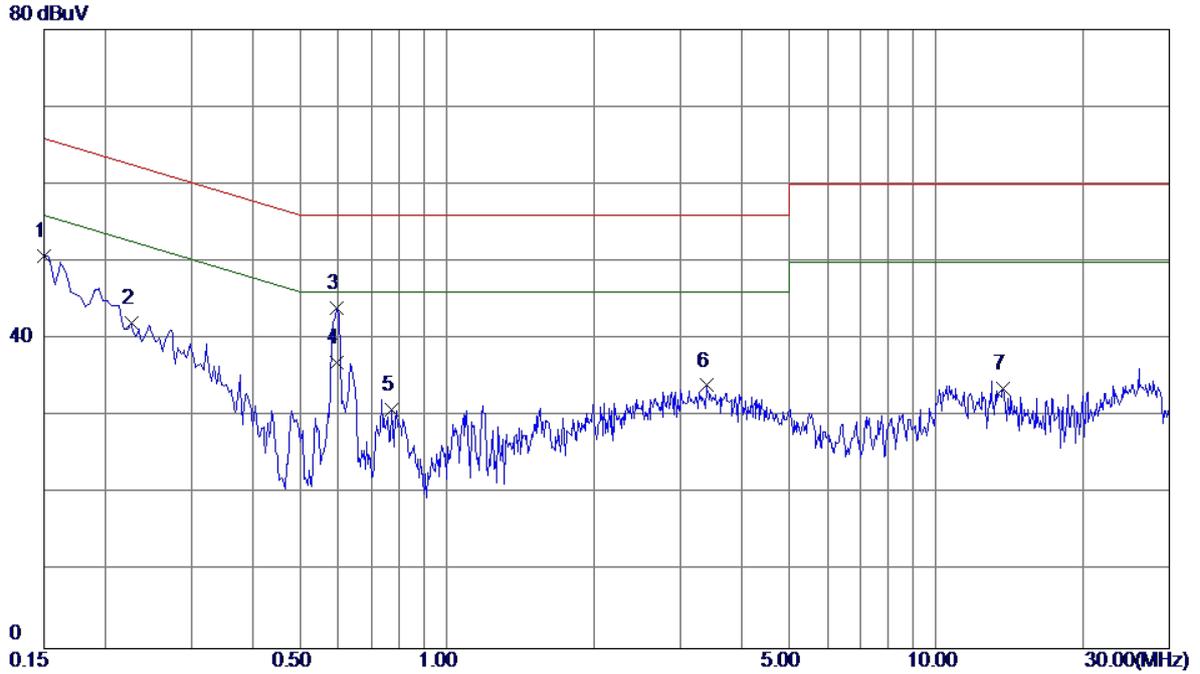


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	41.23	9.57	50.80	66.00	-15.20	Peak	
2	0.2260	32.48	9.57	42.05	62.60	-20.55	Peak	
3	0.5940	34.52	9.50	44.02	56.00	-11.98	Peak	
4 *	0.5940	27.45	9.50	36.95	46.00	-9.05	AVG	
5	0.7700	21.22	9.59	30.81	56.00	-25.19	Peak	
6	3.3980	23.99	10.01	34.00	56.00	-22.00	Peak	
7	13.7180	22.97	10.67	33.64	60.00	-26.36	Peak	

Note : The test result has included the cable loss.

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX MODE _Adapter: Salcomp


Ant 0°

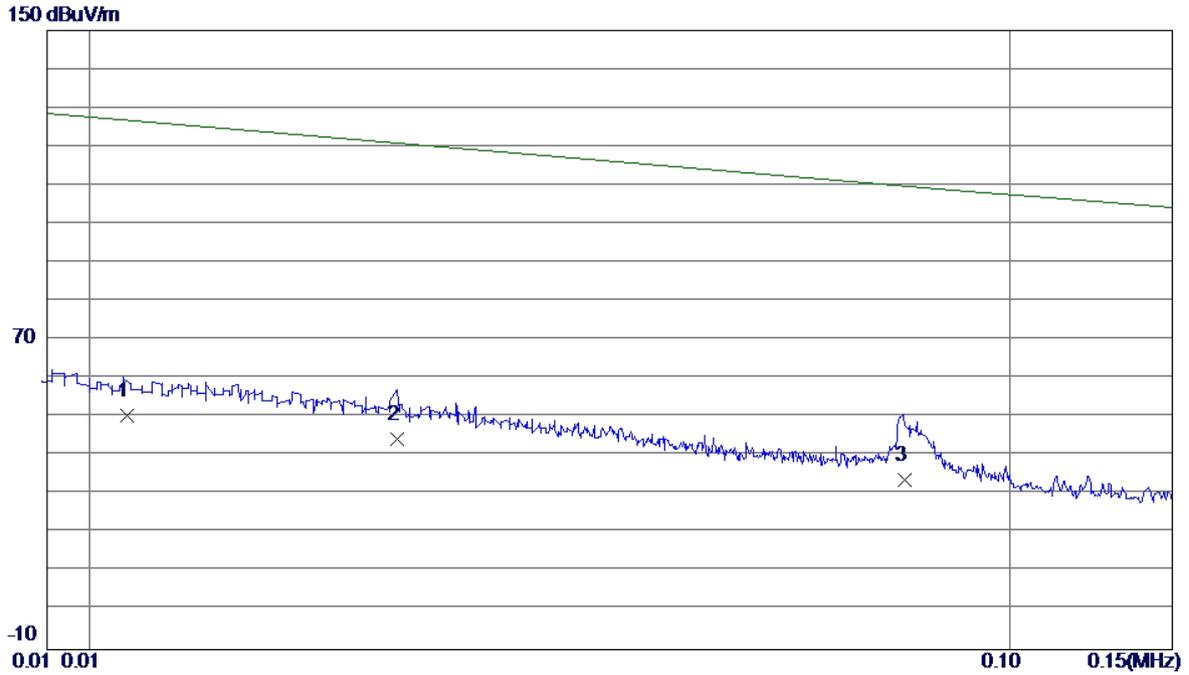

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.0110	26.50	24.06	50.56	128.00	-77.44	AVG	
2	0.0216	21.20	23.32	44.52	125.38	-80.86	AVG	
3	0.0768	14.31	19.44	33.75	111.75	-78.00	AVG	

Test Mode: TX MODE_Adapter: Salcomp


Ant 0°

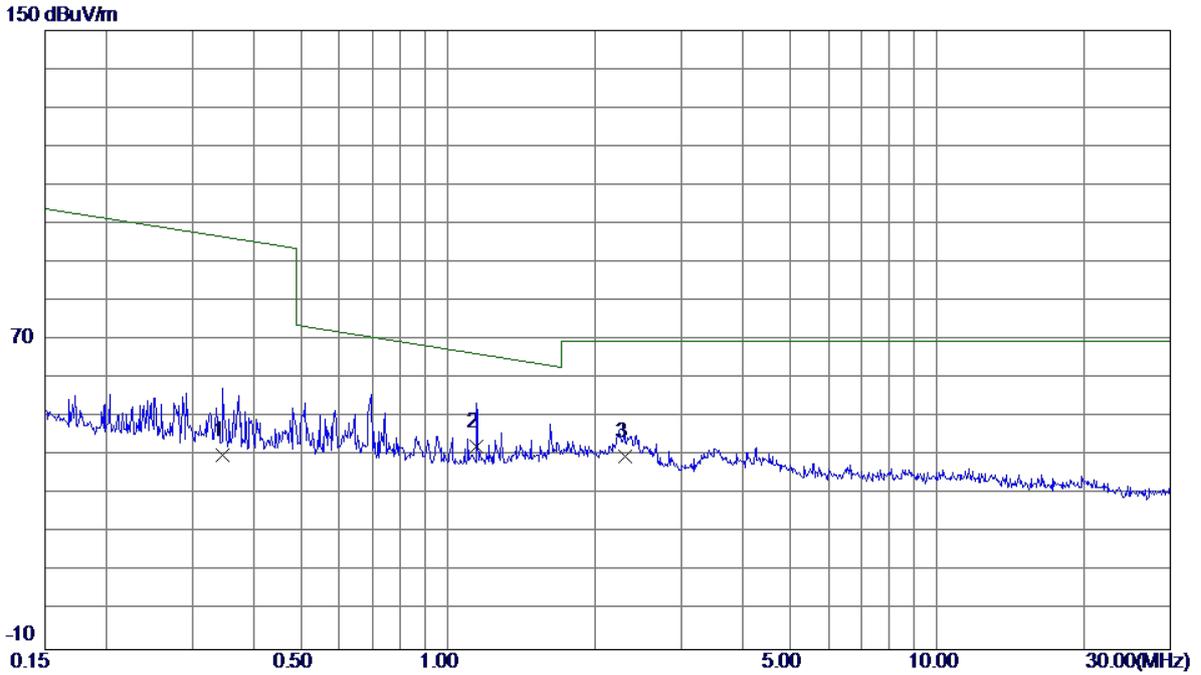

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.3465	21.60	18.54	40.14	98.70	-58.56	AVG	
2 *	1.1413	24.80	17.71	42.51	67.99	-25.48	QP	
3	2.2968	22.29	17.53	39.82	69.54	-29.72	QP	

Test Mode: TX MODE _Adapter: Salcomp


Ant 90°

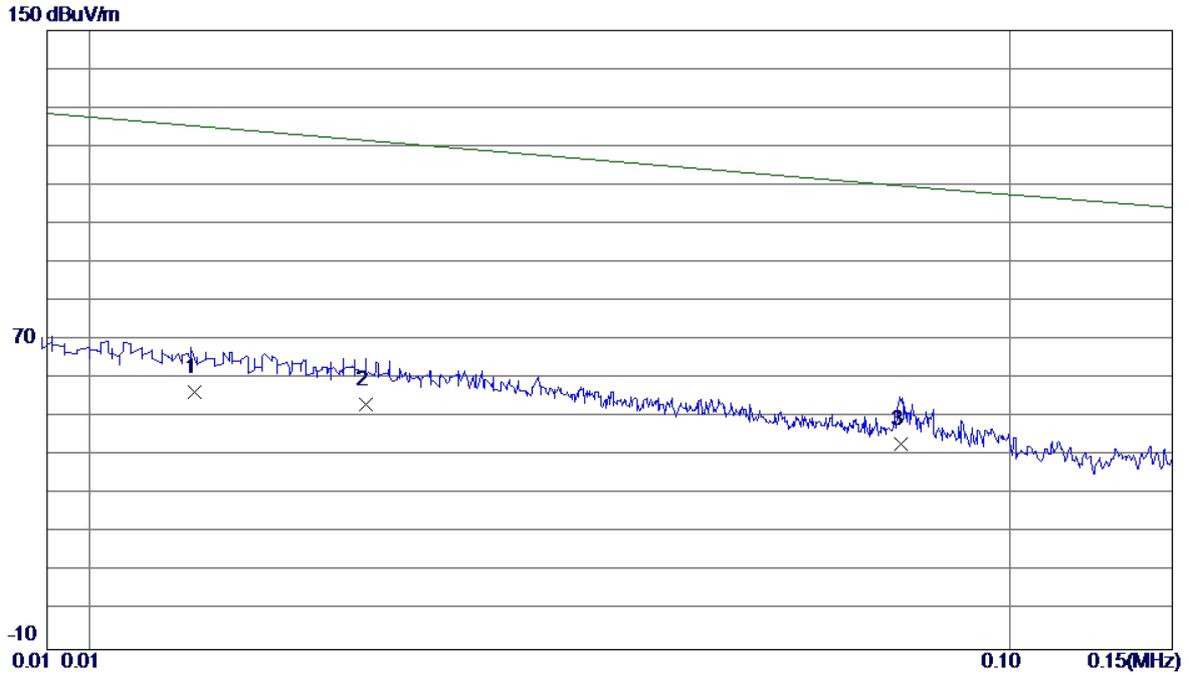

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0130	32.60	23.94	56.54	127.51	-70.97	AVG	
2	0.0200	29.80	23.52	53.32	125.78	-72.46	AVG	
3 *	0.0760	23.71	19.48	43.19	111.95	-68.76	AVG	

Test Mode: TX MODE _Adapter: Salcomp


Ant 90°

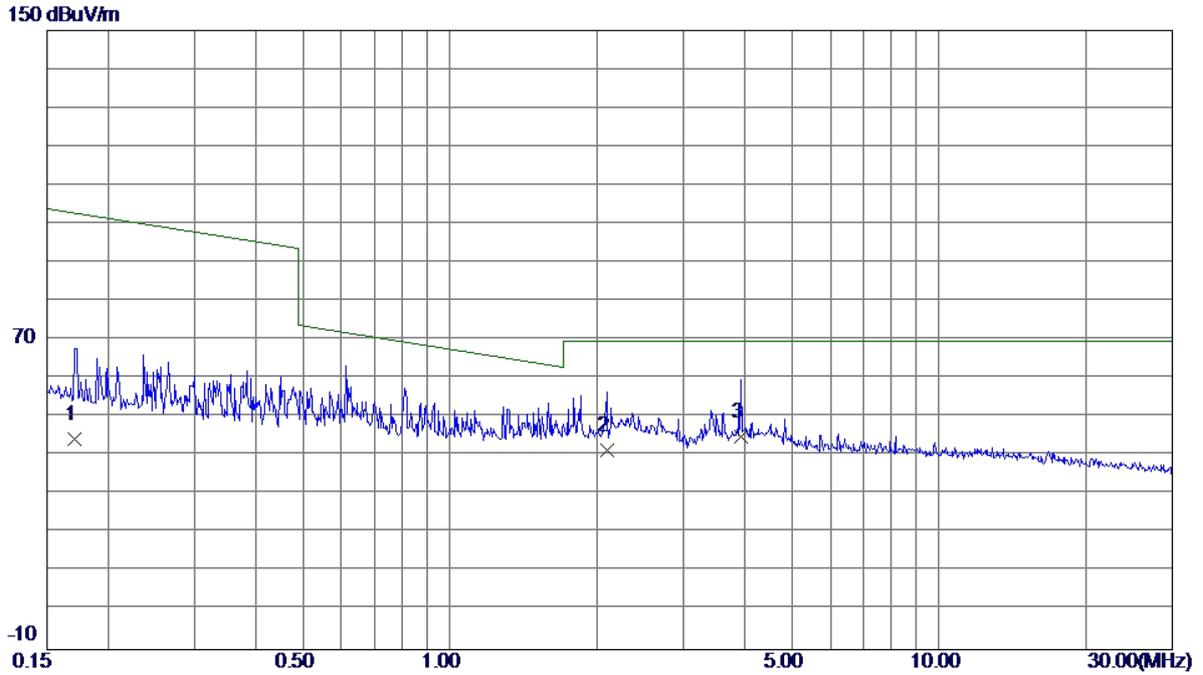

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.1703	25.80	18.72	44.52	104.72	-60.20	AVG	
2	2.0989	23.60	17.78	41.38	69.54	-28.16	QP	
3 *	3.9430	26.30	18.63	44.93	69.54	-24.61	QP	

Test Mode: TX MODE_Adapter: BYD


Ant 0°

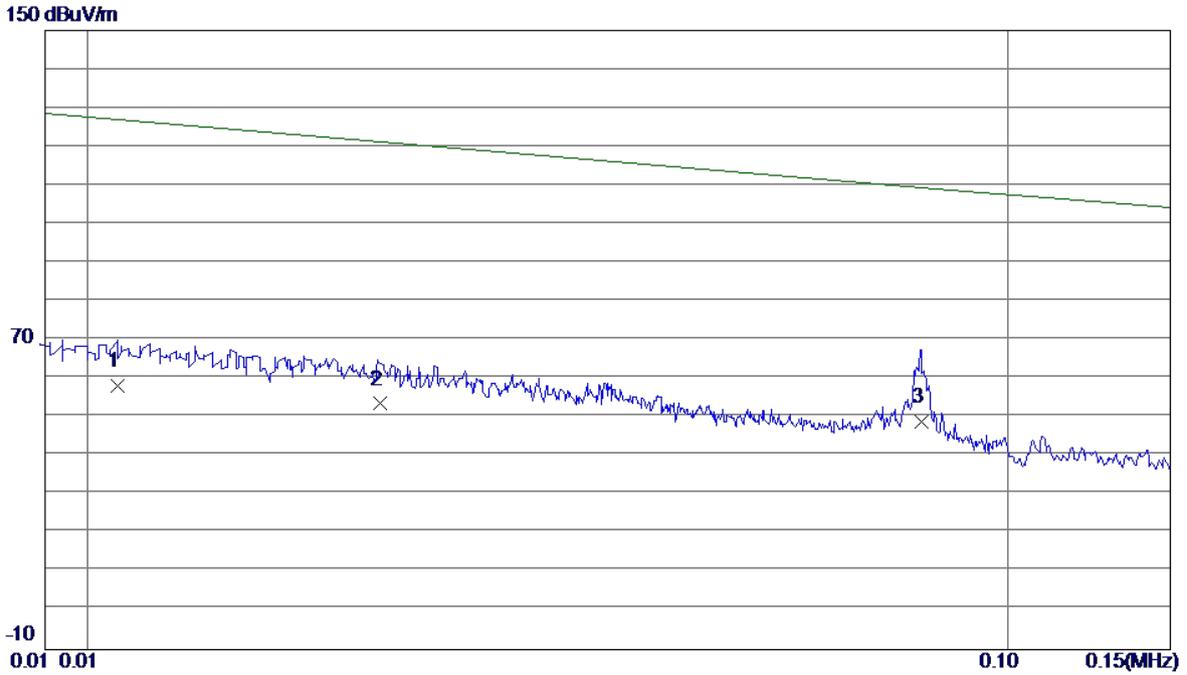

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0108	34.20	24.07	58.27	128.05	-69.78	AVG	
2	0.0208	30.10	23.42	53.52	125.58	-72.06	AVG	
3 *	0.0805	29.51	19.28	48.79	110.84	-62.05	AVG	

Test Mode: TX MODE_Adapter: BYD


Ant 0°

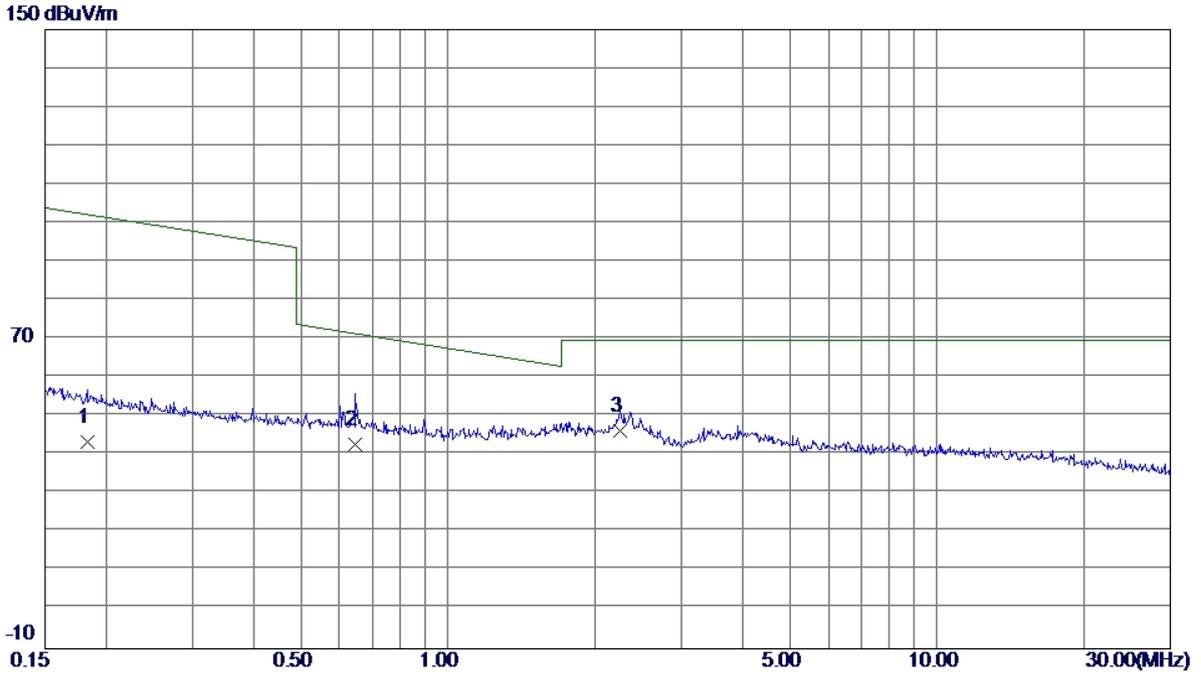

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.1835	24.60	18.71	43.31	104.27	-60.96	AVG	
2	0.6440	24.30	18.43	42.73	72.43	-29.70	QP	
3 *	2.2486	28.70	17.59	46.29	69.54	-23.25	QP	

Test Mode: TX MODE_Adapter: BYD


Ant 90°

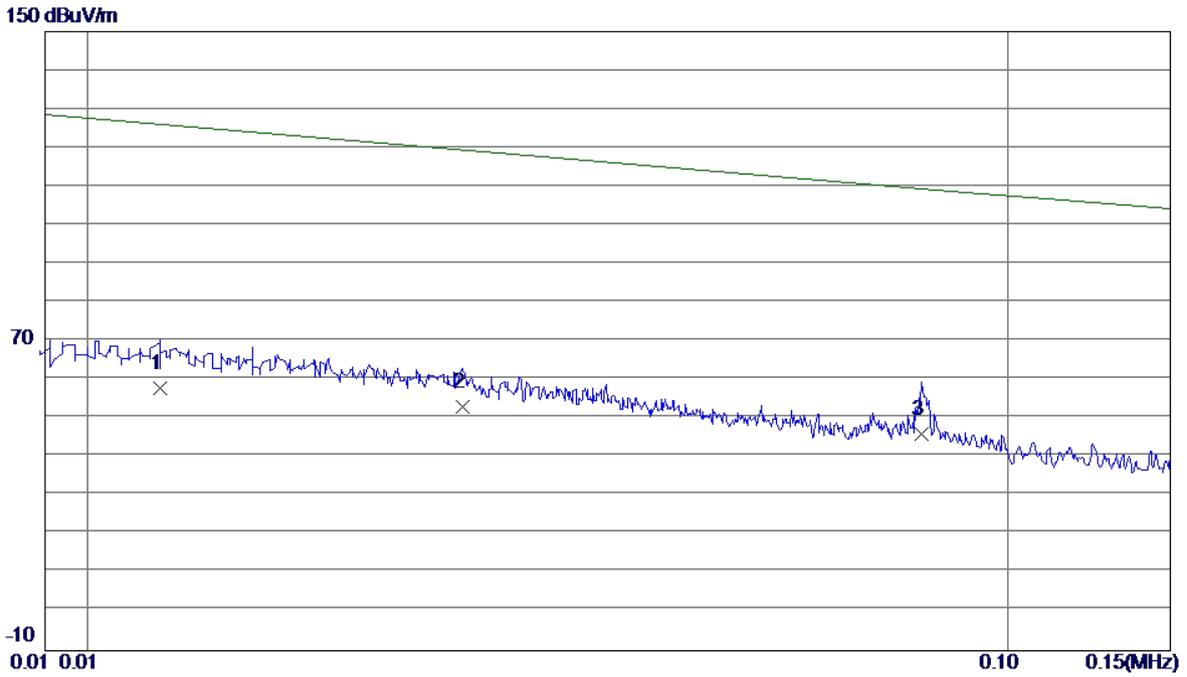

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0120	33.81	24.00	57.81	127.75	-69.94	AVG	
2	0.0256	30.10	22.83	52.93	124.40	-71.47	AVG	
3 *	0.0805	26.71	19.28	45.99	110.84	-64.85	AVG	

Test Mode: TX MODE_Adapter: BYD

Ant 90°

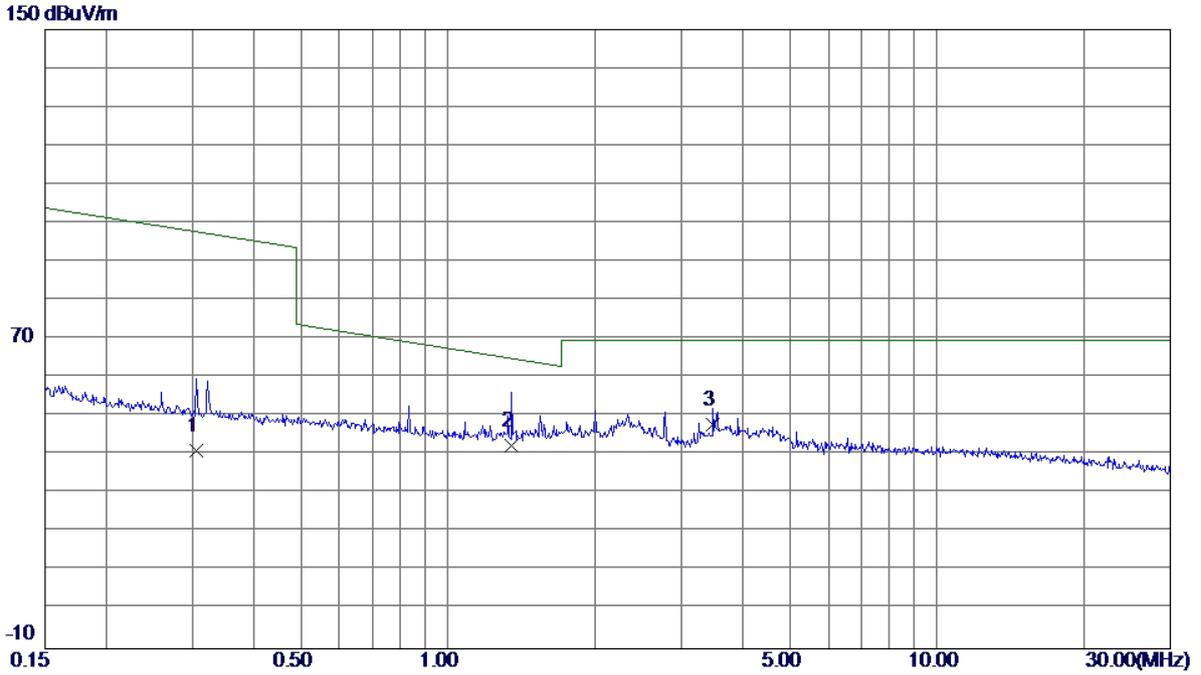


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.3067	22.59	18.59	41.18	100.06	-58.88	AVG	
2	1.3521	24.60	17.76	42.36	66.12	-23.76	QP	
3 *	3.4722	30.30	17.63	47.93	69.54	-21.61	QP	

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: UNII-1/TX A Mode 5180MHz _Adapter: Salcomp


Vertical

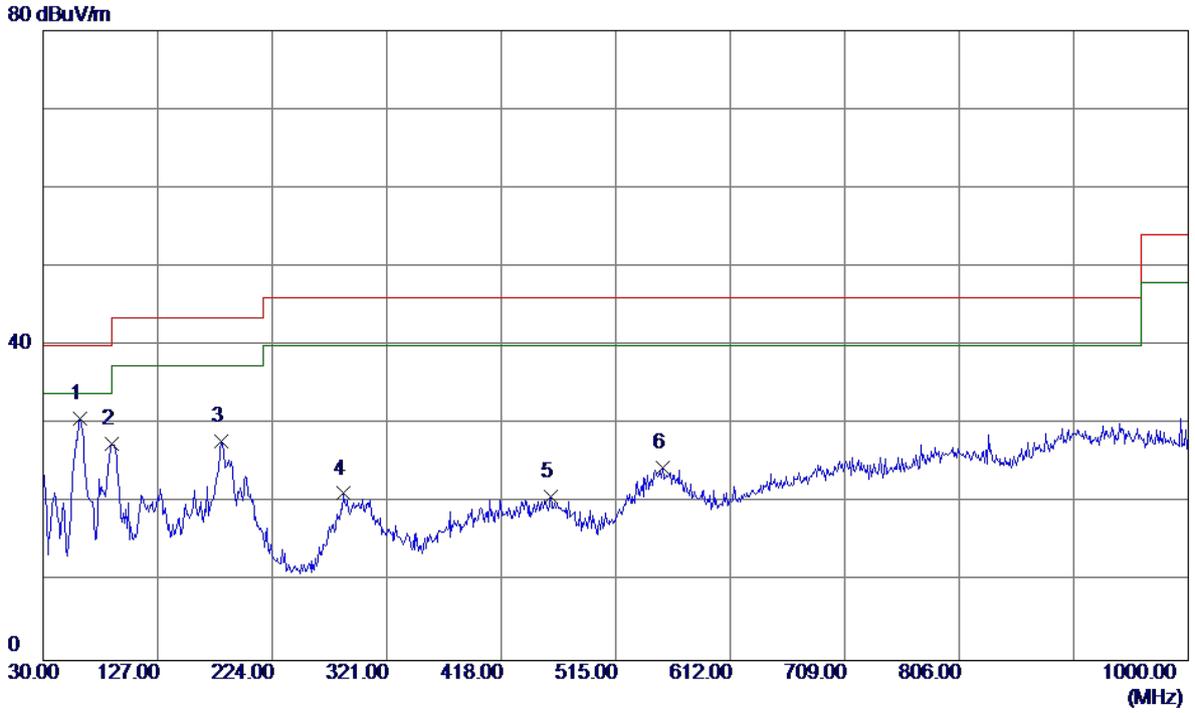

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	61.0400	44.77	-14.02	30.75	40.00	-9.25	Peak	
2	88.2000	44.88	-17.43	27.45	43.50	-16.05	Peak	
3	181.3200	40.79	-12.98	27.81	43.50	-15.69	Peak	
4	284.1400	32.91	-11.71	21.20	46.00	-24.80	Peak	
5	459.7100	29.06	-8.33	20.73	46.00	-25.27	Peak	
6	554.7700	29.24	-4.78	24.46	46.00	-21.54	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz _Adapter: Salcomp


Horizontal

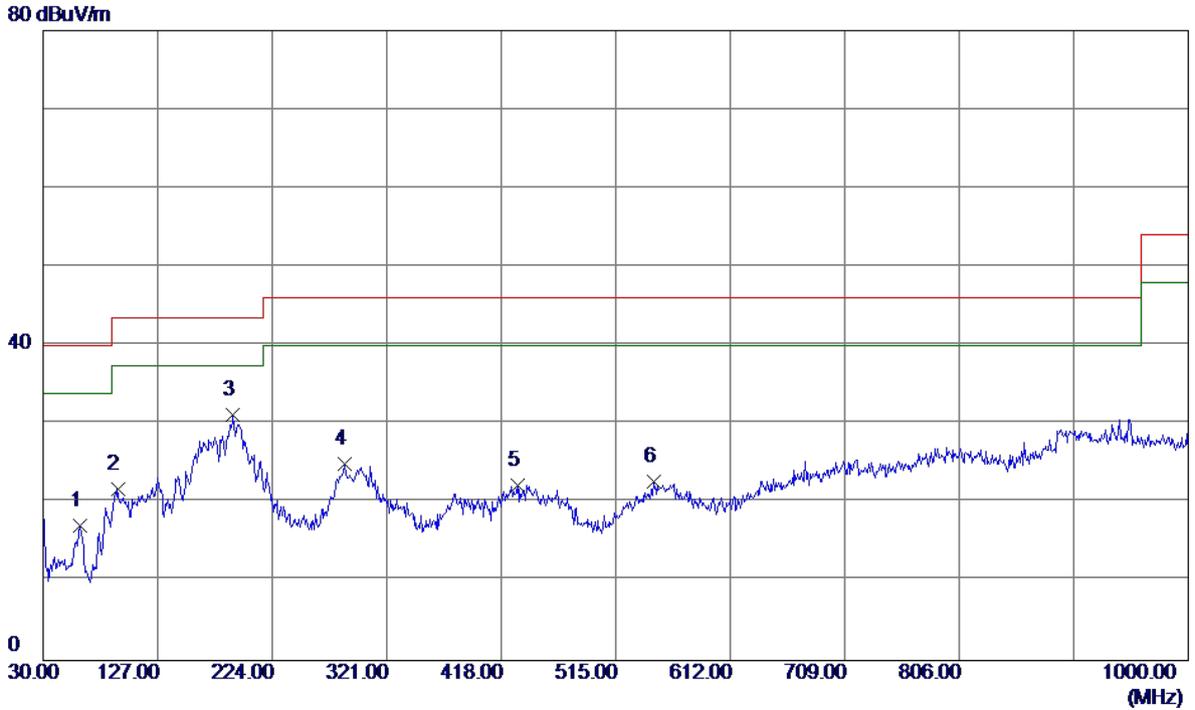

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	61.0400	31.08	-14.02	17.06	40.00	-22.94	Peak	
2	93.0500	39.10	-17.36	21.74	43.50	-21.76	Peak	
3 *	191.0200	45.12	-13.98	31.14	43.50	-12.36	Peak	
4	285.1099	36.54	-11.63	24.91	46.00	-21.09	Peak	
5	431.5800	30.20	-7.92	22.28	46.00	-23.72	Peak	
6	547.0100	27.56	-4.85	22.71	46.00	-23.29	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: Salcomp


Vertical

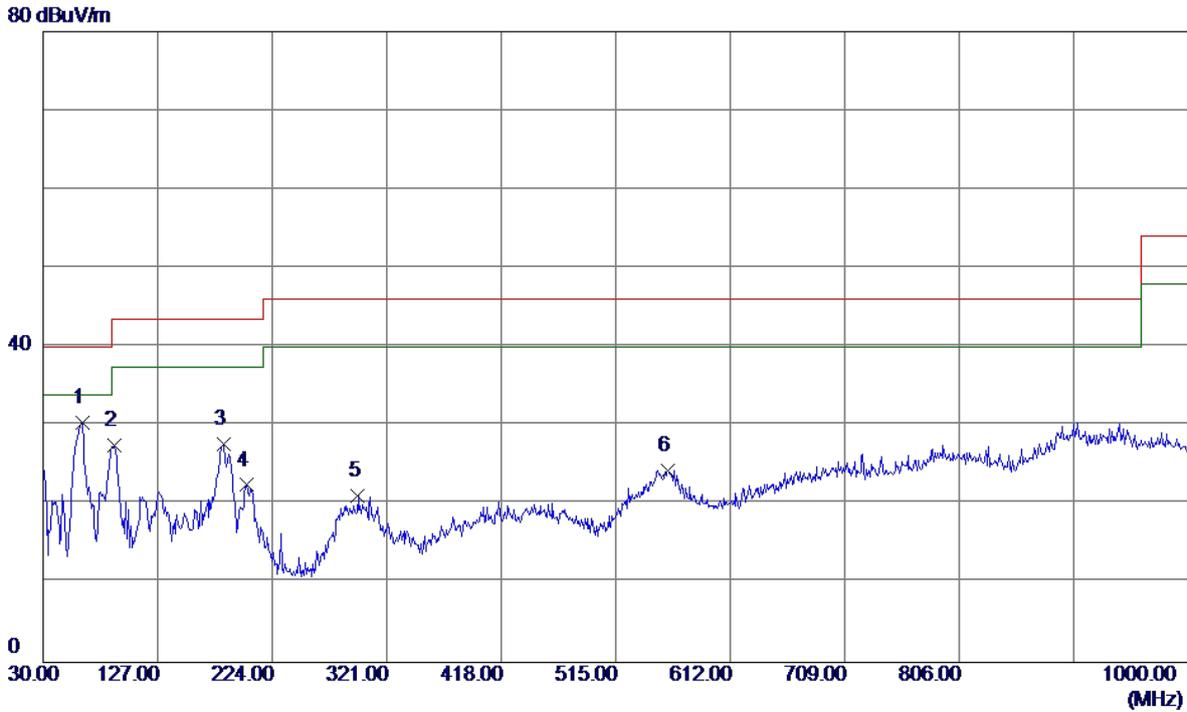

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	62.9800	45.05	-14.58	30.47	40.00	-9.53	Peak	
2	90.1400	45.00	-17.45	27.55	43.50	-15.95	Peak	
3	183.2600	40.84	-13.20	27.64	43.50	-15.86	Peak	
4	202.6600	36.97	-14.49	22.48	43.50	-21.02	Peak	
5	296.7500	31.56	-10.51	21.05	46.00	-24.95	Peak	
6	559.6200	29.32	-5.02	24.30	46.00	-21.70	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: Salcomp


Horizontal

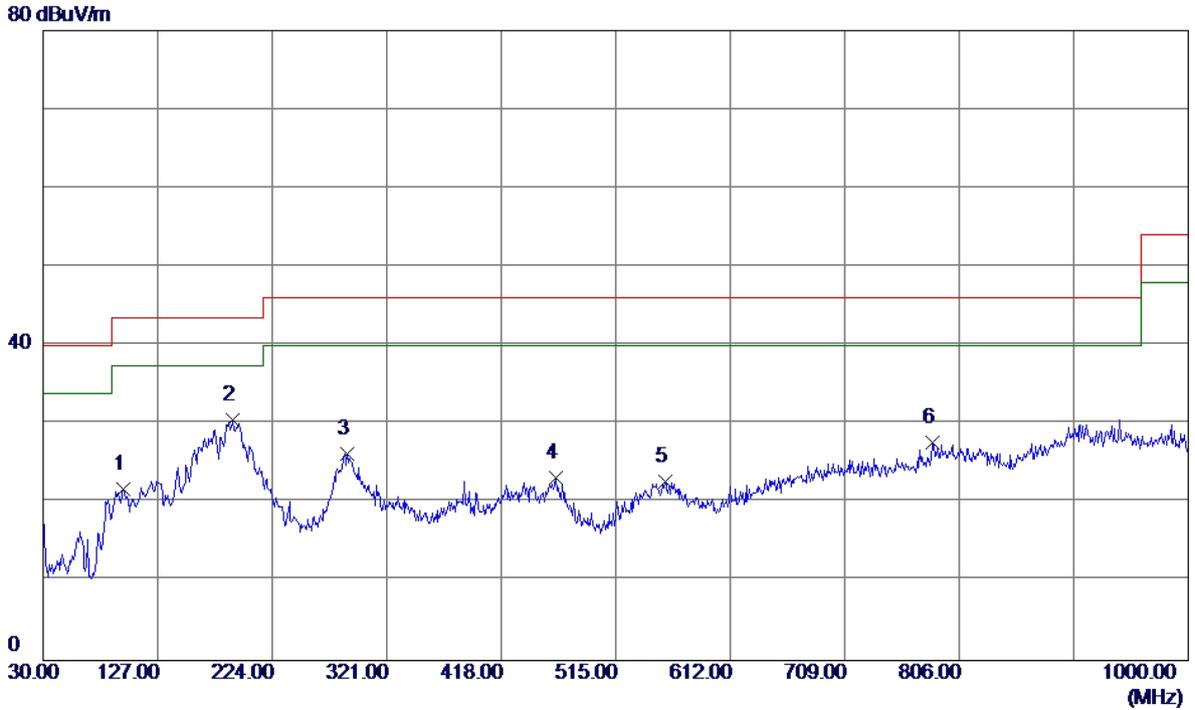

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	97.9000	37.94	-16.24	21.70	43.50	-21.80	Peak	
2 *	191.0200	44.58	-13.98	30.60	43.50	-12.90	Peak	
3	288.0200	37.66	-11.40	26.26	46.00	-19.74	Peak	
4	464.5600	31.64	-8.50	23.14	46.00	-22.86	Peak	
5	556.7100	27.62	-4.88	22.74	46.00	-23.26	Peak	
6	783.6900	28.14	-0.47	27.67	46.00	-18.33	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz _Adapter: Salcomp


Vertical

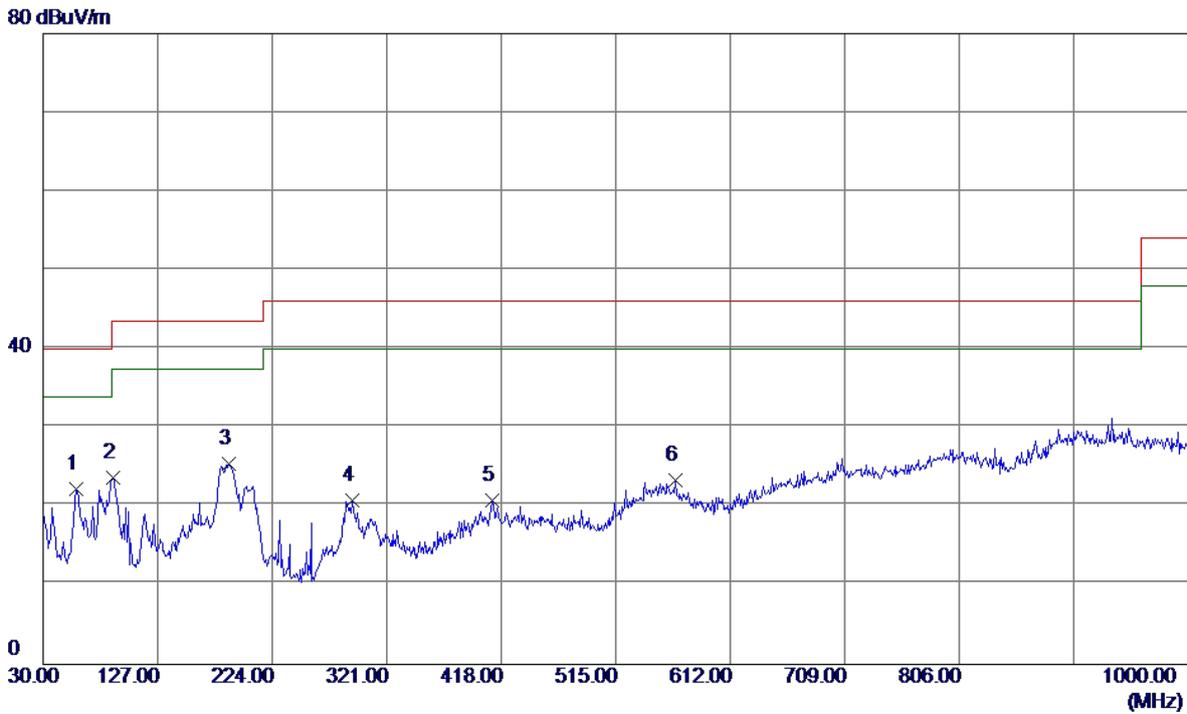

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	58.1300	36.12	-13.83	22.29	40.00	-17.71	Peak	
2	89.1700	41.13	-17.44	23.69	43.50	-19.81	Peak	
3	187.1400	39.08	-13.62	25.46	43.50	-18.04	Peak	
4	291.9000	31.88	-11.04	20.84	46.00	-25.16	Peak	
5	410.2400	28.64	-7.83	20.81	46.00	-25.19	Peak	
6	565.4400	28.65	-5.32	23.33	46.00	-22.67	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: Salcomp


Horizontal

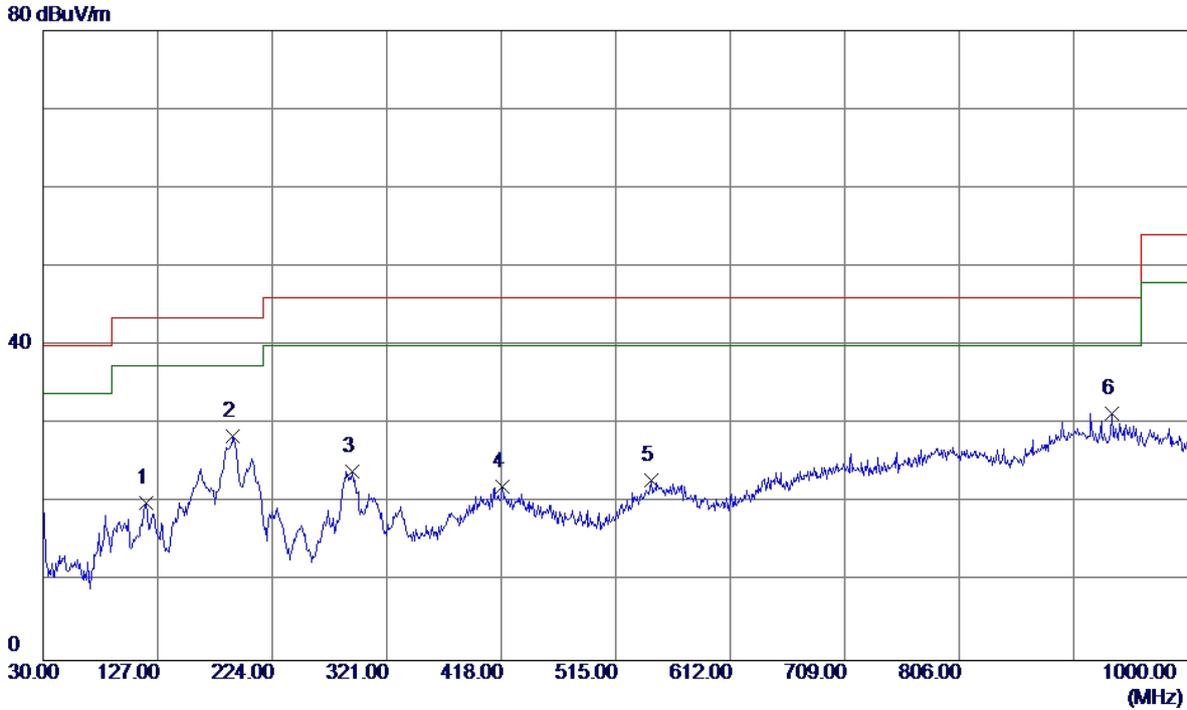

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	117.3000	33.76	-13.78	19.98	43.50	-23.52	Peak	
2	191.0200	42.46	-13.98	28.48	43.50	-15.02	Peak	
3	291.9000	35.08	-11.04	24.04	46.00	-21.96	Peak	
4	418.9700	29.97	-7.86	22.11	46.00	-23.89	Peak	
5	545.0700	27.96	-5.05	22.91	46.00	-23.09	Peak	
6 *	935.0100	28.93	2.50	31.43	46.00	-14.57	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: Salcomp


Vertical

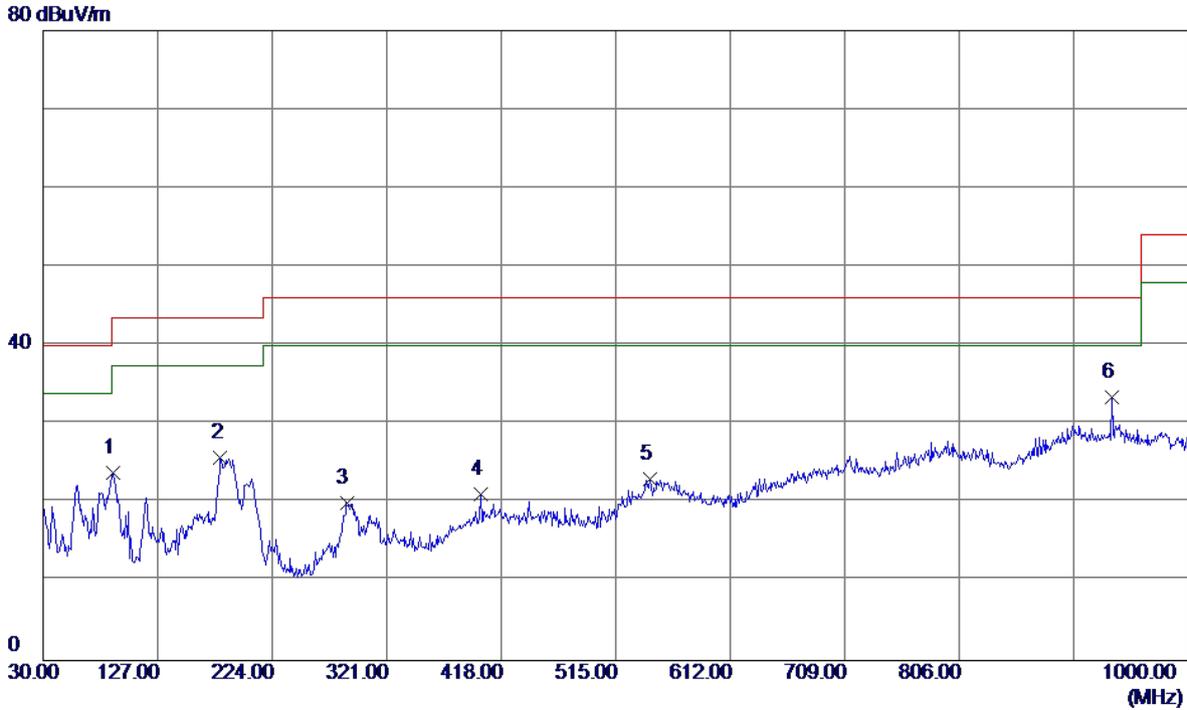

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	89.1700	41.22	-17.44	23.78	43.50	-19.72	Peak	
2	180.3500	38.63	-12.88	25.75	43.50	-17.75	Peak	
3	287.0500	31.45	-11.48	19.97	46.00	-26.03	Peak	
4	400.5400	28.92	-7.78	21.14	46.00	-24.86	Peak	
5	544.1000	28.25	-5.15	23.10	46.00	-22.90	Peak	
6 *	935.0100	30.89	2.50	33.39	46.00	-12.61	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz _Adapter: Salcomp


Horizontal

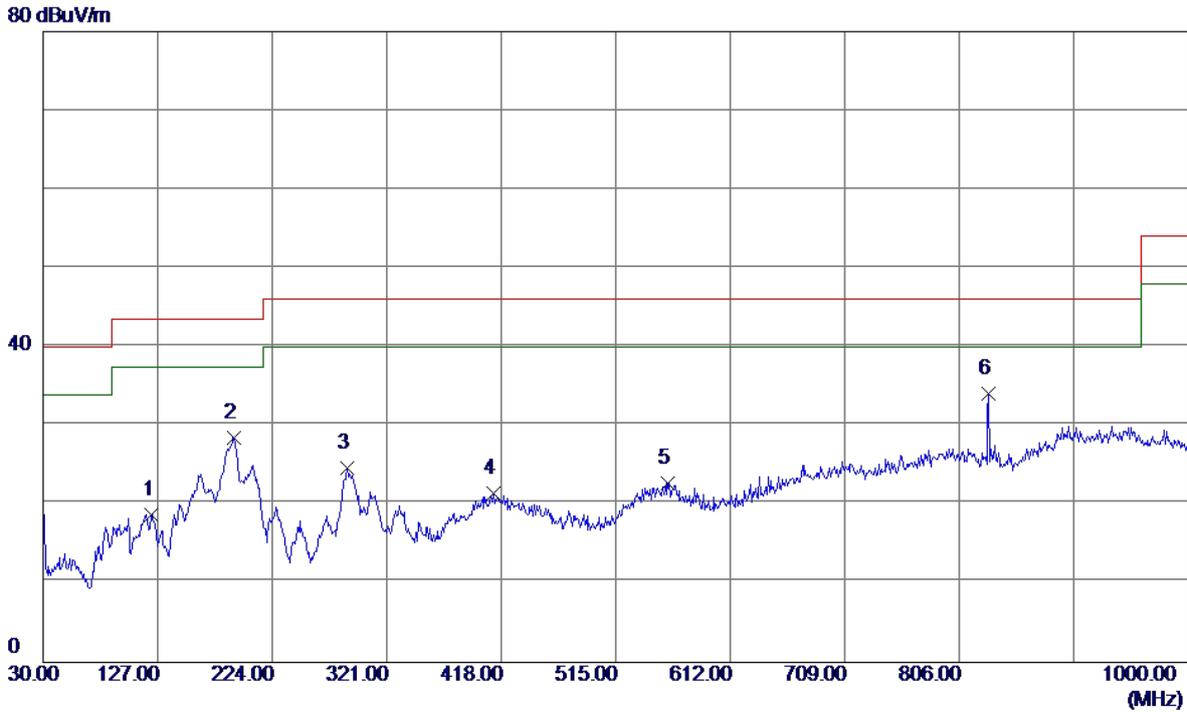

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	122.1500	31.98	-13.22	18.76	43.50	-24.74	Peak	
2	191.9900	42.48	-14.03	28.45	43.50	-15.05	Peak	
3	288.0200	36.00	-11.40	24.60	46.00	-21.40	Peak	
4	411.2100	29.23	-7.83	21.40	46.00	-24.60	Peak	
5	559.6200	27.80	-5.02	22.78	46.00	-23.22	Peak	
6 *	831.2199	34.80	-0.68	34.12	46.00	-11.88	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz _Adapter: Salcomp


Vertical

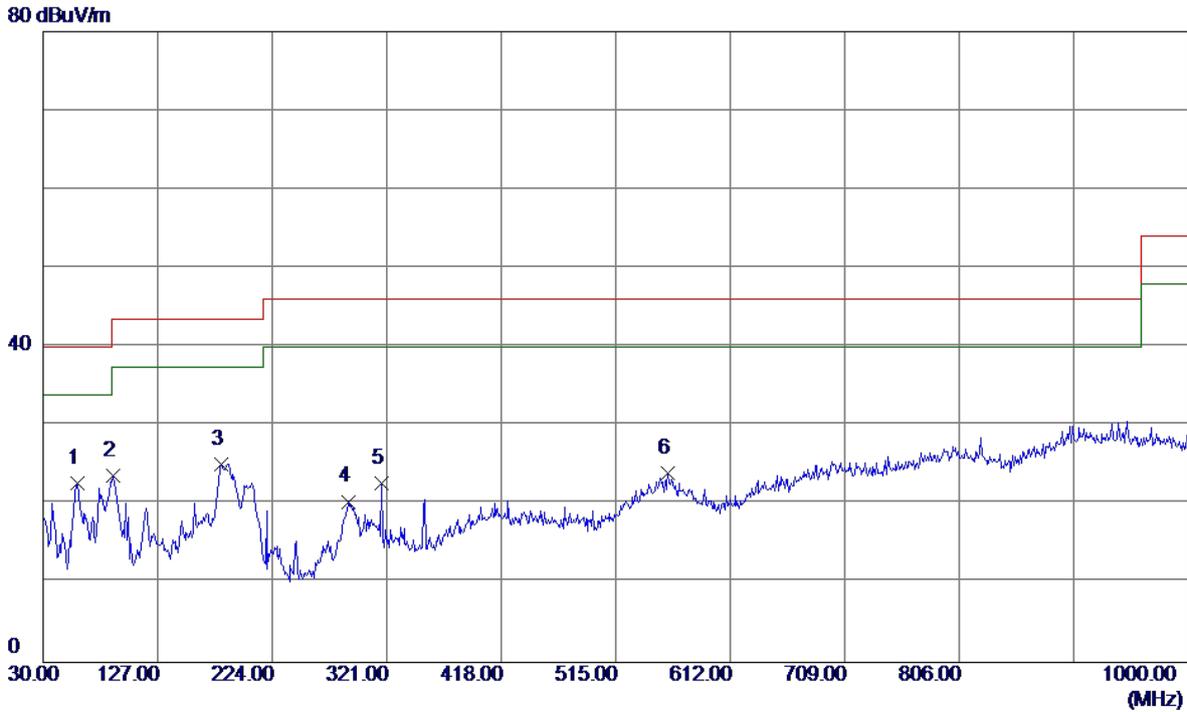

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	59.1000	36.53	-13.77	22.76	40.00	-17.24	Peak	
2	89.1700	41.08	-17.44	23.64	43.50	-19.86	Peak	
3	181.3200	38.15	-12.98	25.17	43.50	-18.33	Peak	
4	288.9900	31.73	-11.33	20.40	46.00	-25.60	Peak	
5	317.1200	33.20	-10.52	22.68	46.00	-23.32	Peak	
6	559.6200	29.00	-5.02	23.98	46.00	-22.02	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz _Adapter: Salcomp


Horizontal

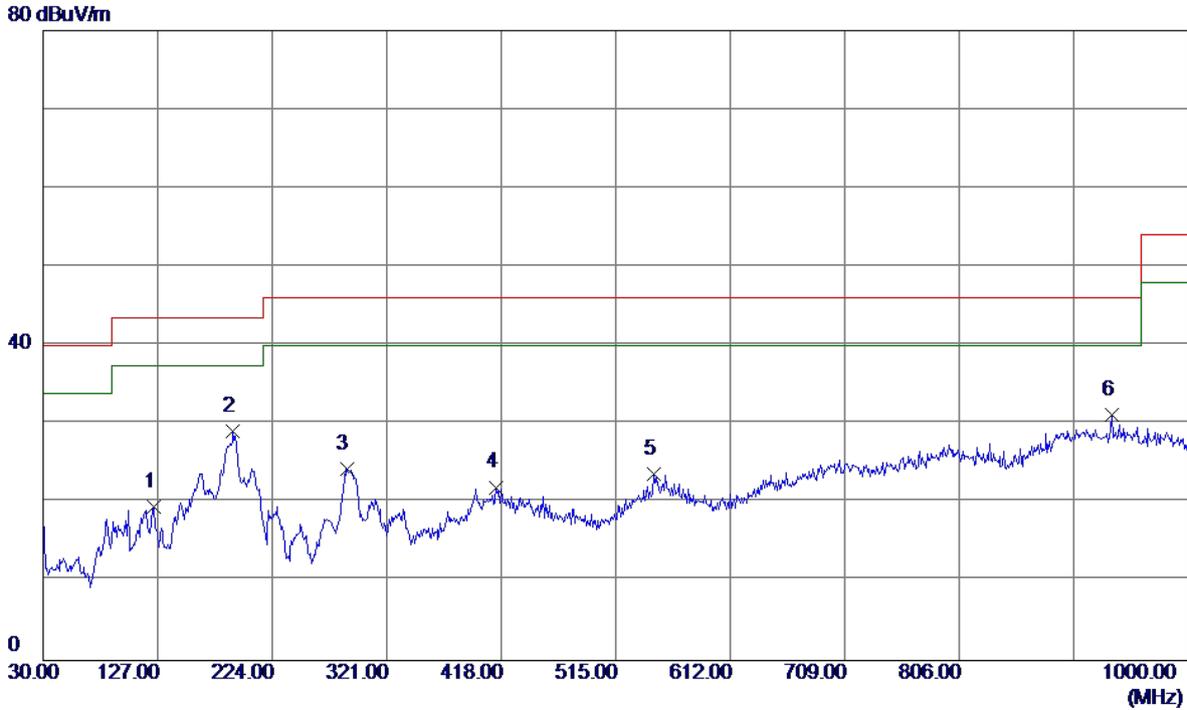

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	124.0900	32.49	-13.01	19.48	43.50	-24.02	Peak	
2 *	191.0200	43.03	-13.98	29.05	43.50	-14.45	Peak	
3	287.0500	35.82	-11.48	24.34	46.00	-21.66	Peak	
4	414.1200	29.84	-7.84	22.00	46.00	-24.00	Peak	
5	547.0100	28.58	-4.85	23.73	46.00	-22.27	Peak	
6	935.0100	28.73	2.50	31.23	46.00	-14.77	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz _Adapter: Salcomp


Vertical

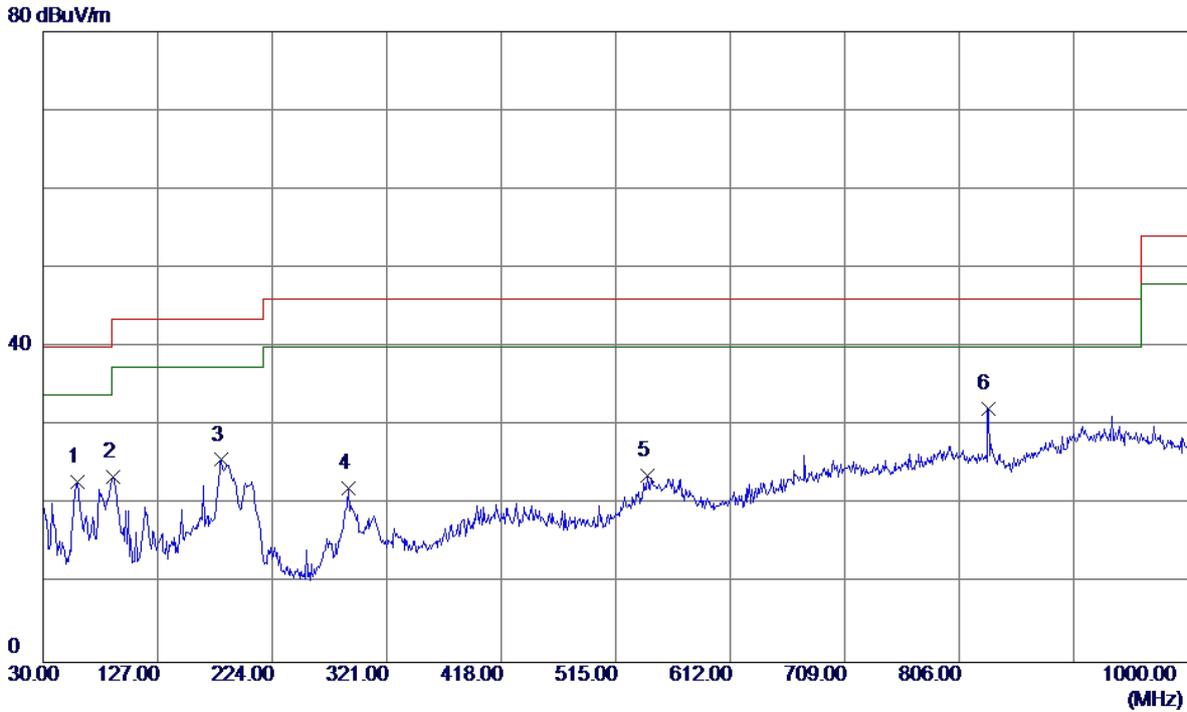

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	59.1000	36.63	-13.77	22.86	40.00	-17.14	Peak	
2	89.1700	41.01	-17.44	23.57	43.50	-19.93	Peak	
3	181.3200	38.66	-12.98	25.68	43.50	-17.82	Peak	
4	288.9900	33.43	-11.33	22.10	46.00	-23.90	Peak	
5	542.1599	29.06	-5.35	23.71	46.00	-22.29	Peak	
6 *	830.2500	32.78	-0.65	32.13	46.00	-13.87	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz _Adapter: Salcomp

Horizontal

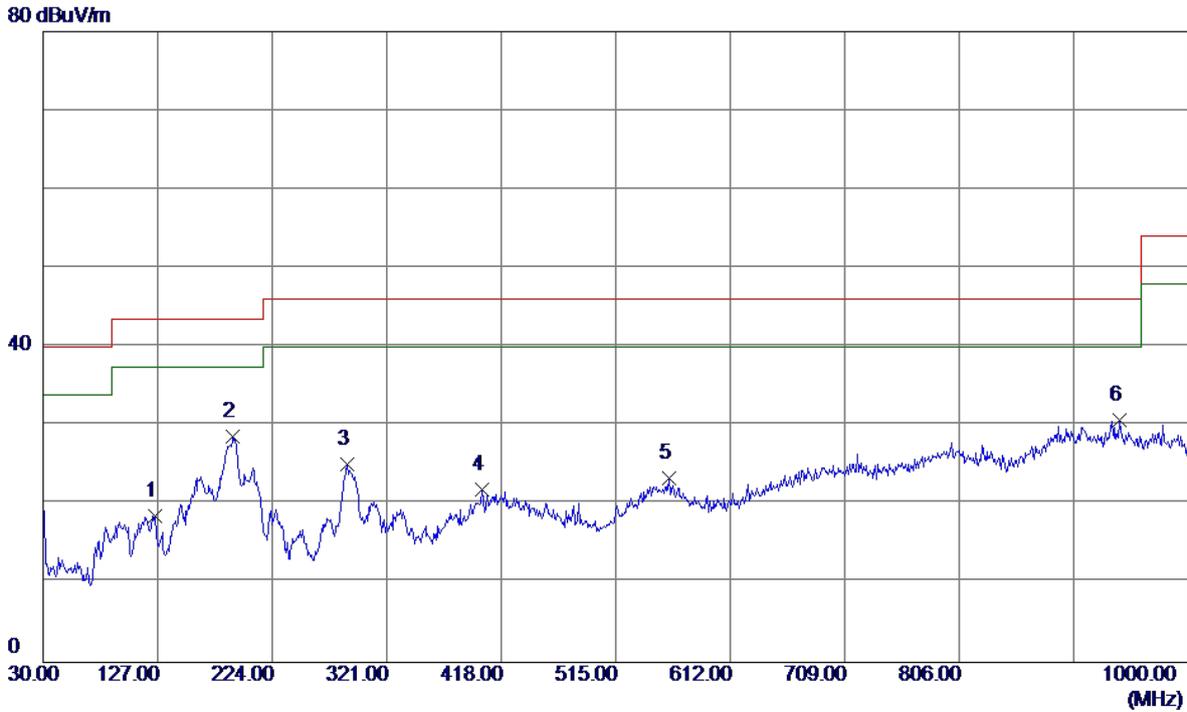


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	125.0600	31.53	-12.90	18.63	43.50	-24.87	Peak	
2 *	191.0200	42.60	-13.98	28.62	43.50	-14.88	Peak	
3	288.0200	36.49	-11.40	25.09	46.00	-20.91	Peak	
4	401.5100	29.71	-7.79	21.92	46.00	-24.08	Peak	
5	560.5900	28.41	-5.07	23.34	46.00	-22.66	Peak	
6	941.8000	28.30	2.47	30.77	46.00	-15.23	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: BYD

Vertical


80 dBuV/m

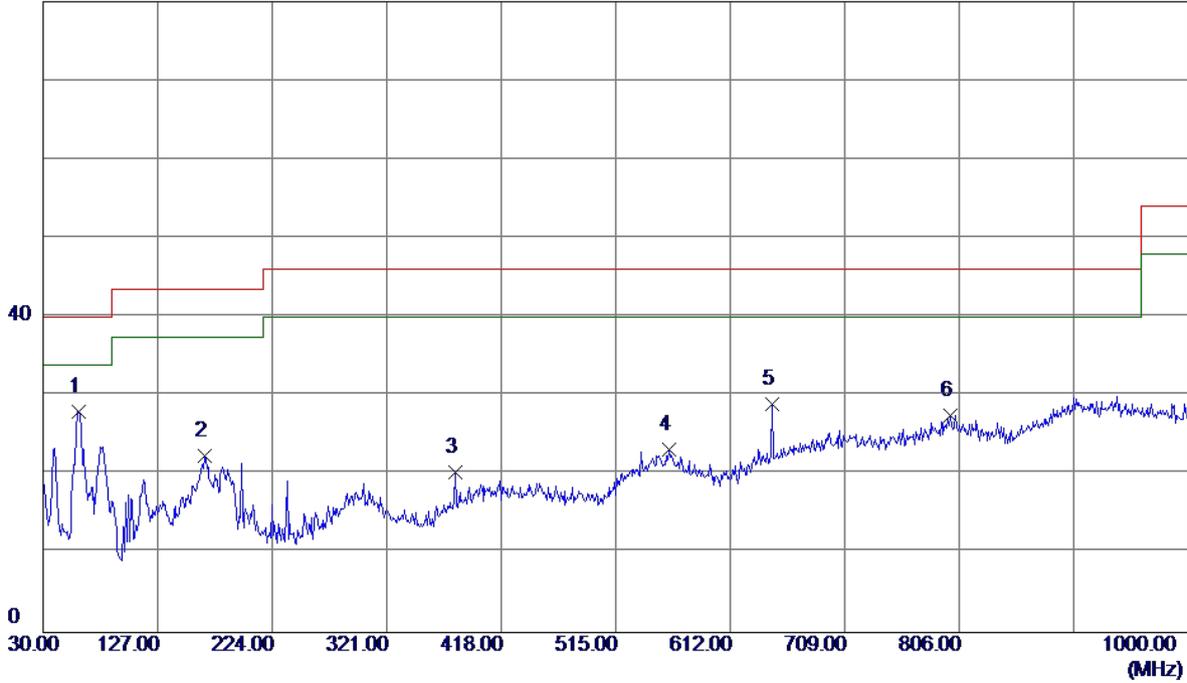

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	60.0700	41.75	-13.74	28.01	40.00	-11.99	Peak	
2	166.7700	34.62	-12.21	22.41	43.50	-21.09	Peak	
3	379.2000	29.53	-9.21	20.32	46.00	-25.68	Peak	
4	560.5900	28.22	-5.07	23.15	46.00	-22.85	Peak	
5	647.8900	33.30	-4.30	29.00	46.00	-17.00	Peak	
6	798.2400	27.32	0.18	27.50	46.00	-18.50	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: BYD


Horizontal

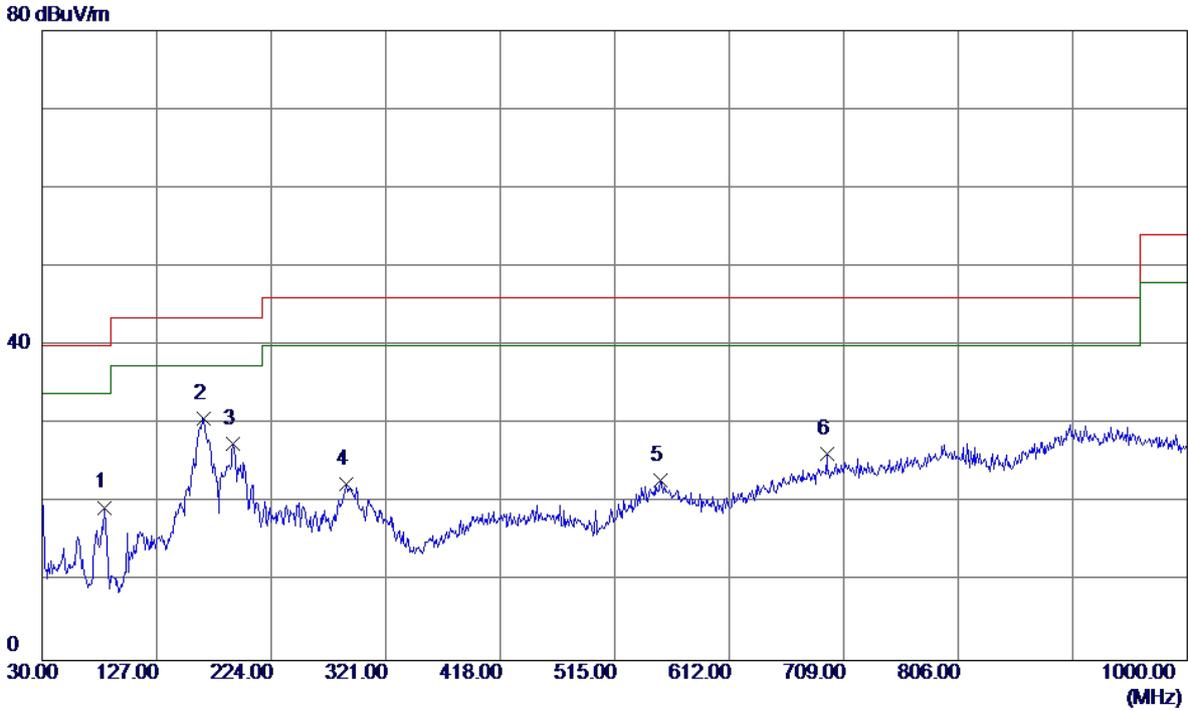

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	82.3800	36.13	-16.69	19.44	40.00	-20.56	Peak	
2 *	166.7700	42.87	-12.21	30.66	43.50	-12.84	Peak	
3	191.9900	41.48	-14.03	27.45	43.50	-16.05	Peak	
4	288.0200	33.78	-11.40	22.38	46.00	-23.62	Peak	
5	553.8000	27.56	-4.73	22.83	46.00	-23.17	Peak	
6	694.4500	28.58	-2.33	26.25	46.00	-19.75	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: BYD


Vertical

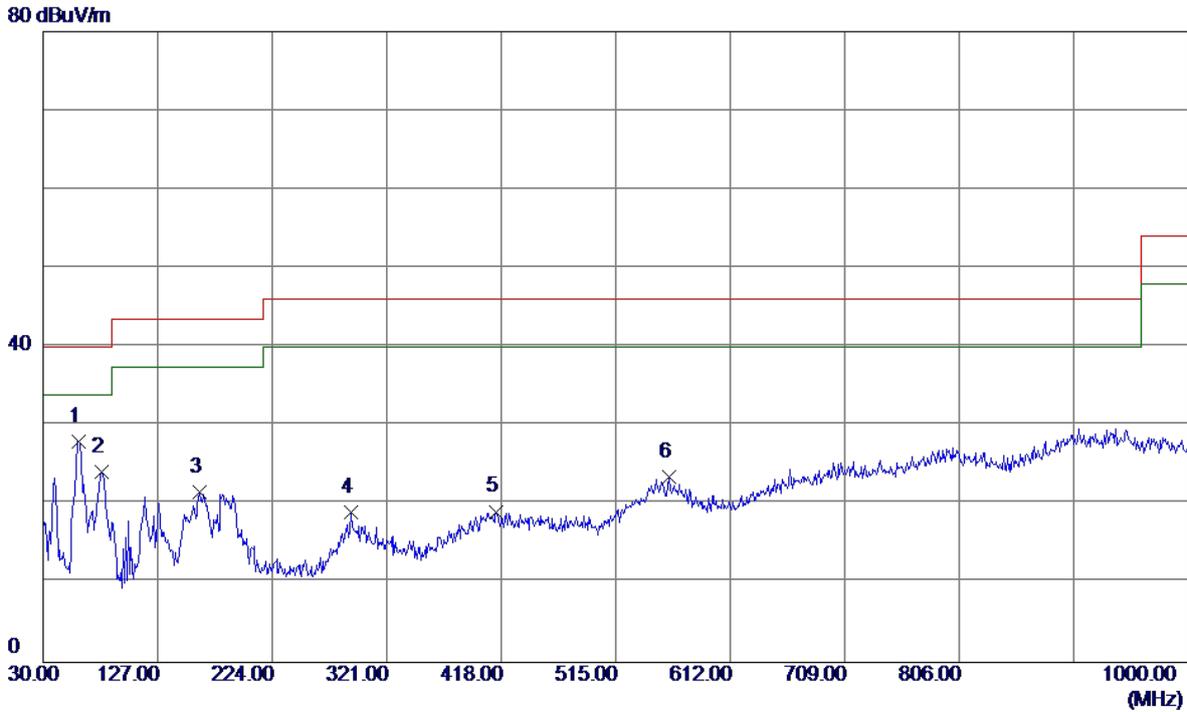

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	60.0700	41.78	-13.74	28.04	40.00	-11.96	Peak	
2	79.4700	40.26	-16.10	24.16	40.00	-15.84	Peak	
3	162.8900	33.77	-12.17	21.60	43.50	-21.90	Peak	
4	290.9300	30.14	-11.15	18.99	46.00	-27.01	Peak	
5	414.1200	26.96	-7.84	19.12	46.00	-26.88	Peak	
6	560.5900	28.63	-5.07	23.56	46.00	-22.44	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: BYD


Horizontal

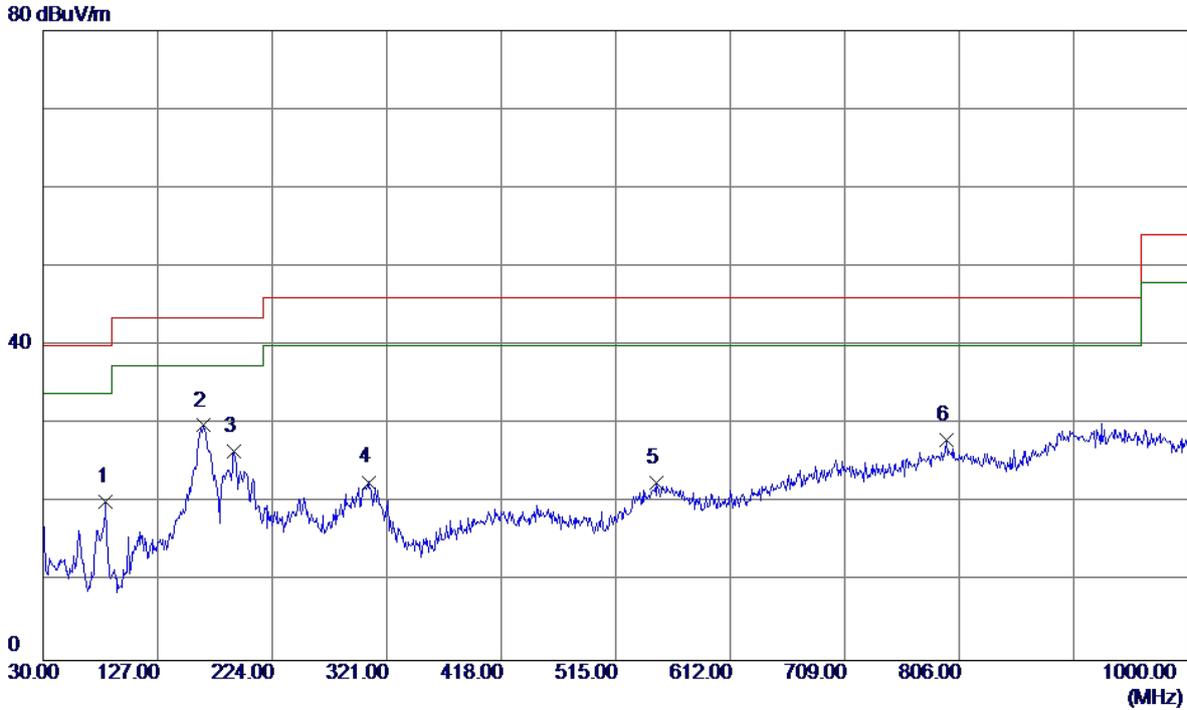

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	83.3500	37.15	-16.95	20.20	40.00	-19.80	Peak	
2 *	165.8000	42.04	-12.20	29.84	43.50	-13.66	Peak	
3	191.9900	40.60	-14.03	26.57	43.50	-16.93	Peak	
4	305.4800	32.92	-10.28	22.64	46.00	-23.36	Peak	
5	549.9200	27.11	-4.55	22.56	46.00	-23.44	Peak	
6	795.3300	27.92	0.05	27.97	46.00	-18.03	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: BYD


Vertical

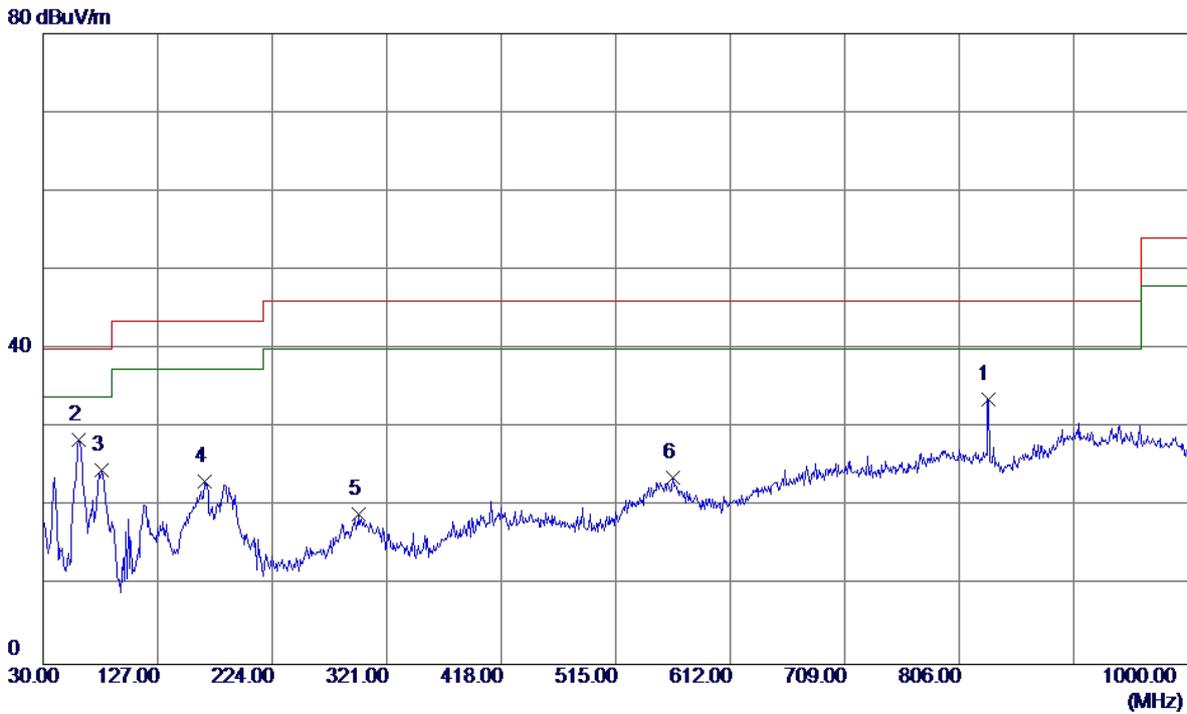

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	830.2500	34.31	-0.65	33.66	46.00	-12.34	Peak	
2 *	60.0700	42.15	-13.74	28.41	40.00	-11.59	Peak	
3	79.4700	40.80	-16.10	24.70	40.00	-15.30	Peak	
4	166.7700	35.39	-12.21	23.18	43.50	-20.32	Peak	
5	297.7200	29.49	-10.41	19.08	46.00	-26.92	Peak	
6	563.5000	28.85	-5.22	23.63	46.00	-22.37	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: BYD


Horizontal

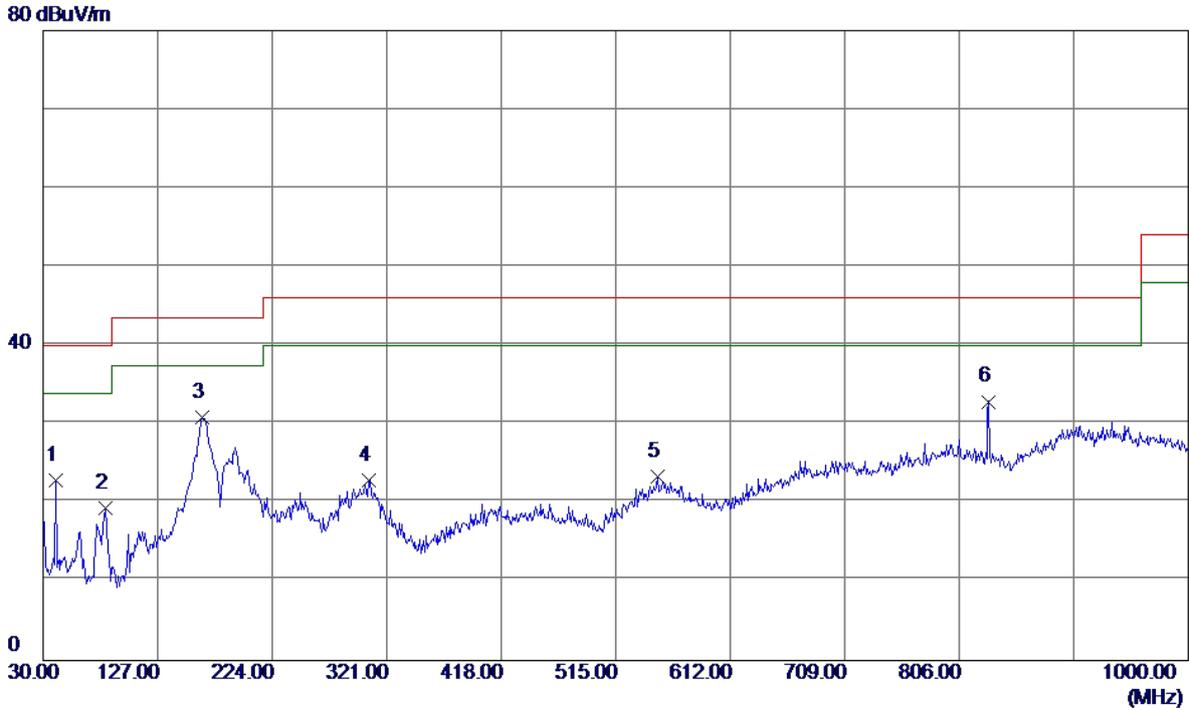

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	40.6699	36.66	-13.77	22.89	40.00	-17.11	Peak	
2	82.3800	35.99	-16.69	19.30	40.00	-20.70	Peak	
3 *	164.8300	43.11	-12.19	30.92	43.50	-12.58	Peak	
4	305.4800	33.09	-10.28	22.81	46.00	-23.19	Peak	
5	550.8900	27.99	-4.58	23.41	46.00	-22.59	Peak	
6	831.2199	33.56	-0.68	32.88	46.00	-13.12	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: BYD


Vertical

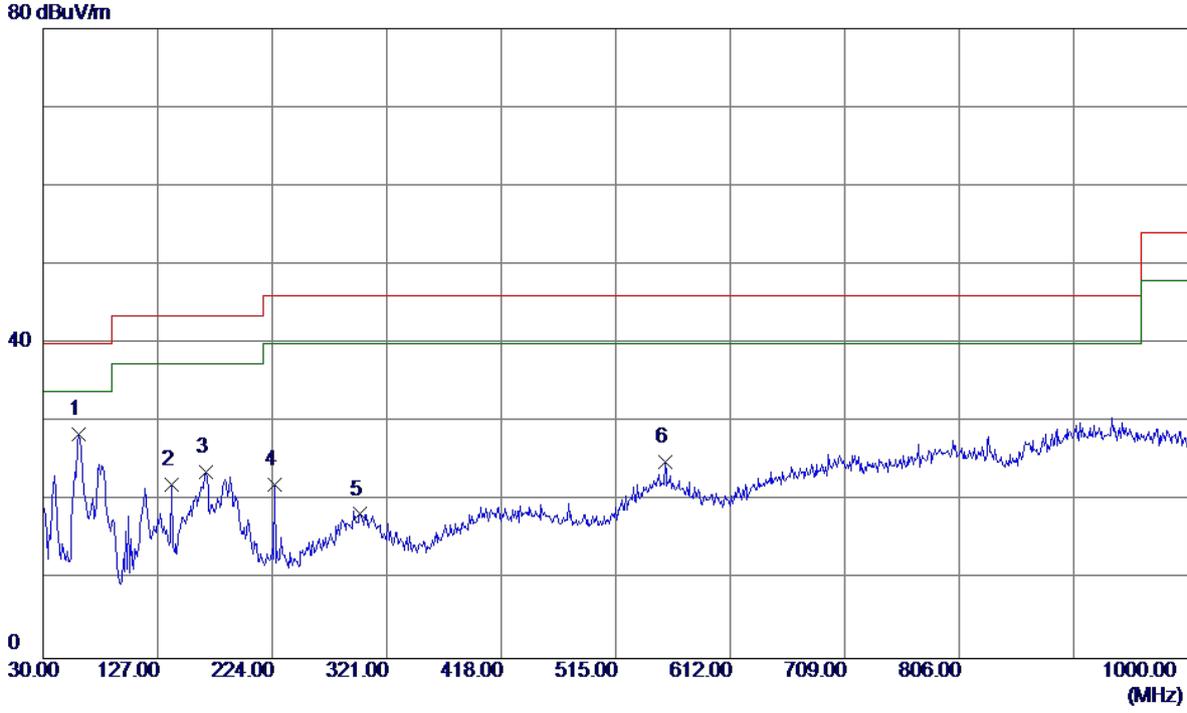

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	60.0700	42.15	-13.74	28.41	40.00	-11.59	Peak	
2	138.6400	35.64	-13.56	22.08	43.50	-21.42	Peak	
3	167.7400	35.86	-12.22	23.64	43.50	-19.86	Peak	
4	225.9400	35.80	-13.73	22.07	46.00	-23.93	Peak	
5	298.6900	28.62	-10.30	18.32	46.00	-27.68	Peak	
6	556.7100	29.83	-4.88	24.95	46.00	-21.05	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: BYD

Horizontal

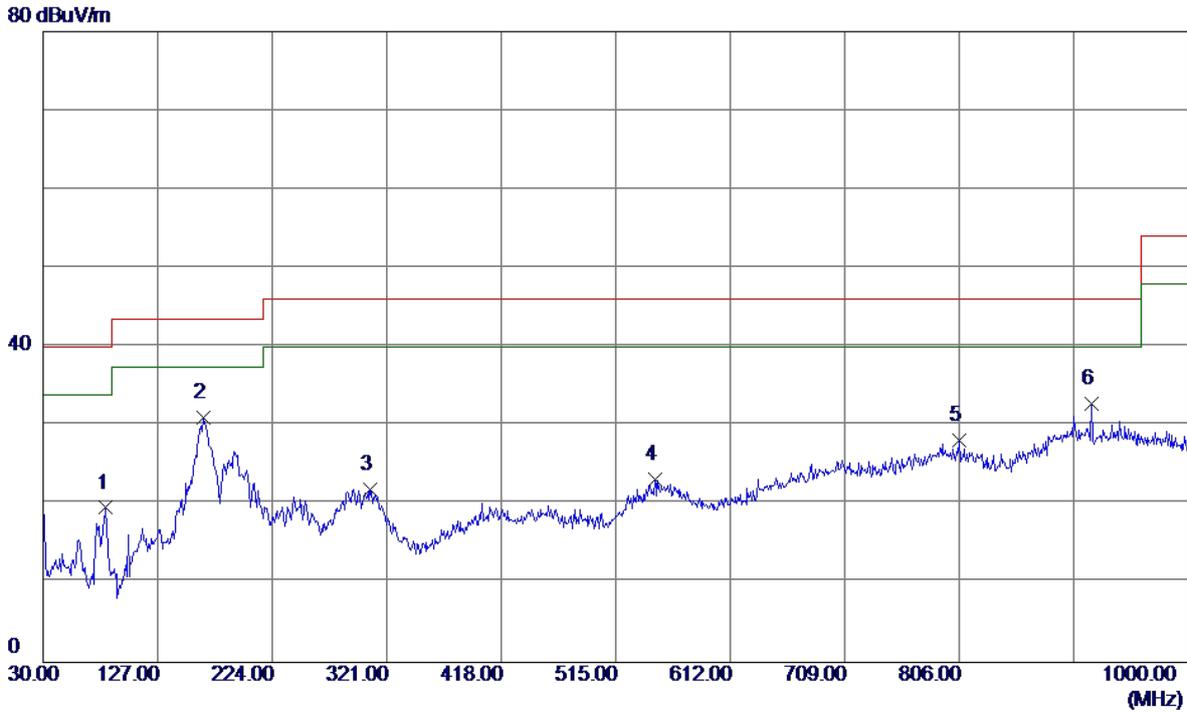


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	83.3500	36.55	-16.95	19.60	40.00	-20.40	Peak	
2 *	165.8000	43.18	-12.20	30.98	43.50	-12.52	Peak	
3	307.4200	32.28	-10.32	21.96	46.00	-24.04	Peak	
4	547.9800	27.90	-4.75	23.15	46.00	-22.85	Peak	
5	806.0000	28.01	0.08	28.09	46.00	-17.91	Peak	
6	918.5200	30.19	2.57	32.76	46.00	-13.24	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: BYD

Vertical


80 dBuV/m

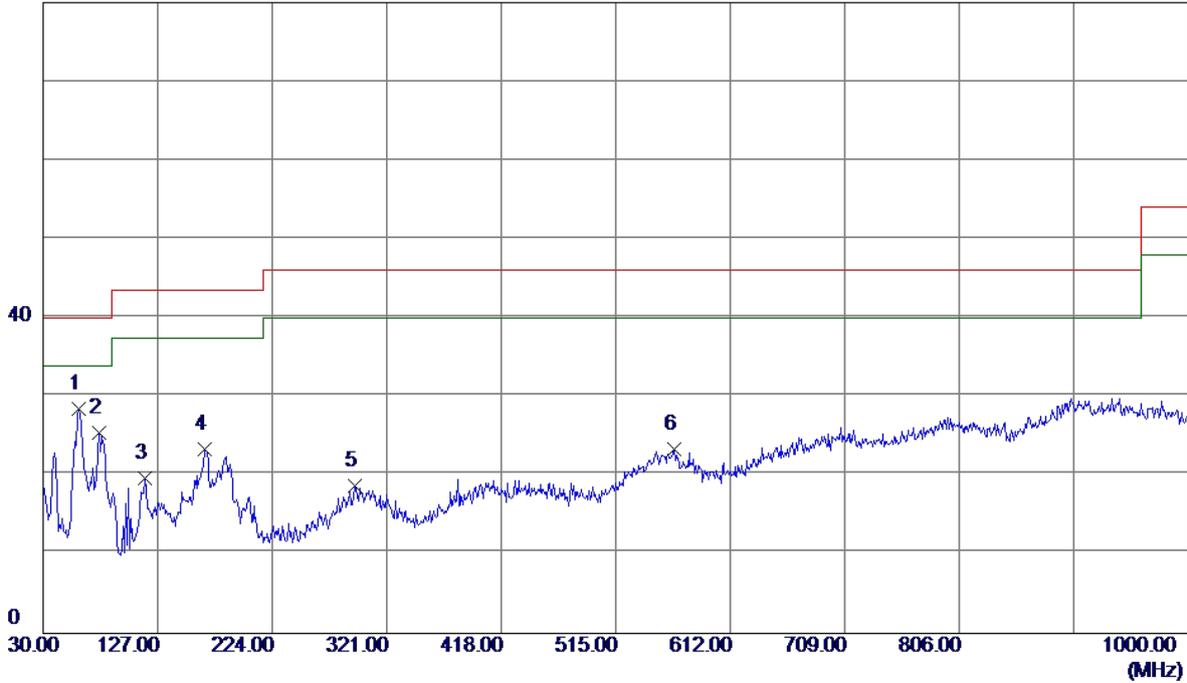

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	60.0700	42.20	-13.74	28.46	40.00	-11.54	Peak	
2	77.5300	41.71	-16.31	25.40	40.00	-14.60	Peak	
3	116.3300	33.56	-13.90	19.66	43.50	-23.84	Peak	
4	166.7700	35.57	-12.21	23.36	43.50	-20.14	Peak	
5	293.8400	29.62	-10.83	18.79	46.00	-27.21	Peak	
6	564.4699	28.68	-5.27	23.41	46.00	-22.59	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: BYD


Horizontal

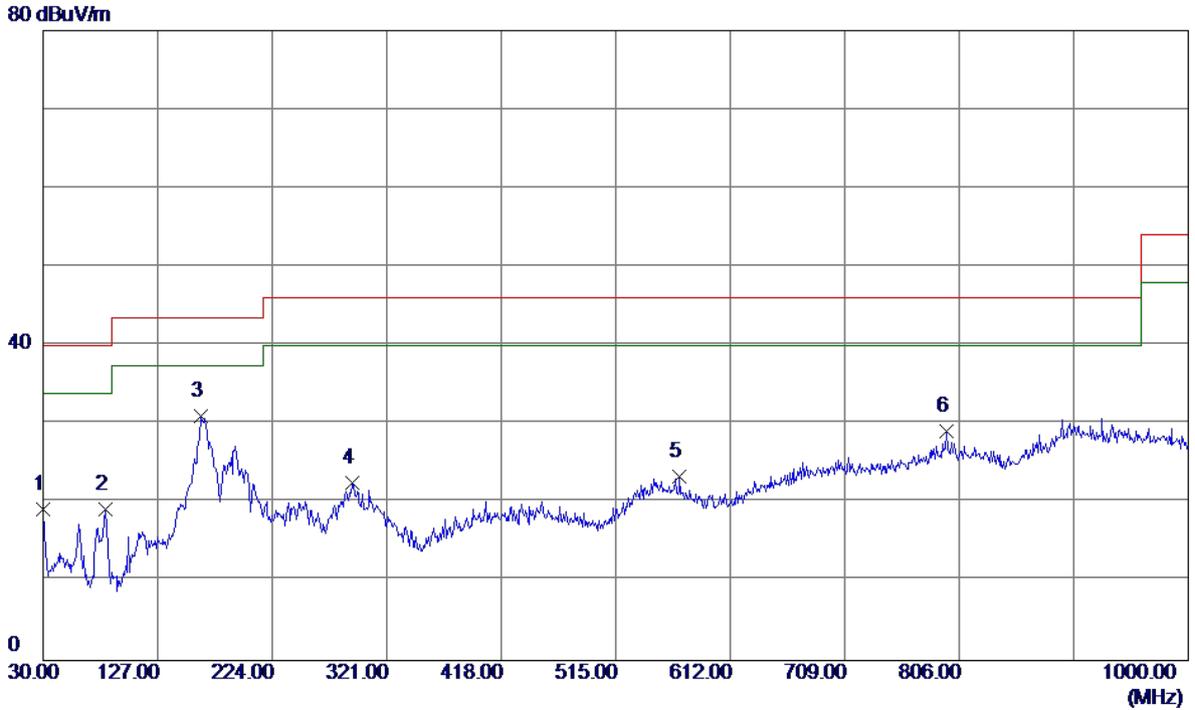

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	30.0000	33.24	-14.03	19.21	40.00	-20.79	Peak	
2	82.3800	35.84	-16.69	19.15	40.00	-20.85	Peak	
3 *	163.8600	43.15	-12.18	30.97	43.50	-12.53	Peak	
4	291.9000	33.64	-11.04	22.60	46.00	-23.40	Peak	
5	569.3200	28.86	-5.51	23.35	46.00	-22.65	Peak	
6	795.3300	29.08	0.05	29.13	46.00	-16.87	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: BYD


Vertical

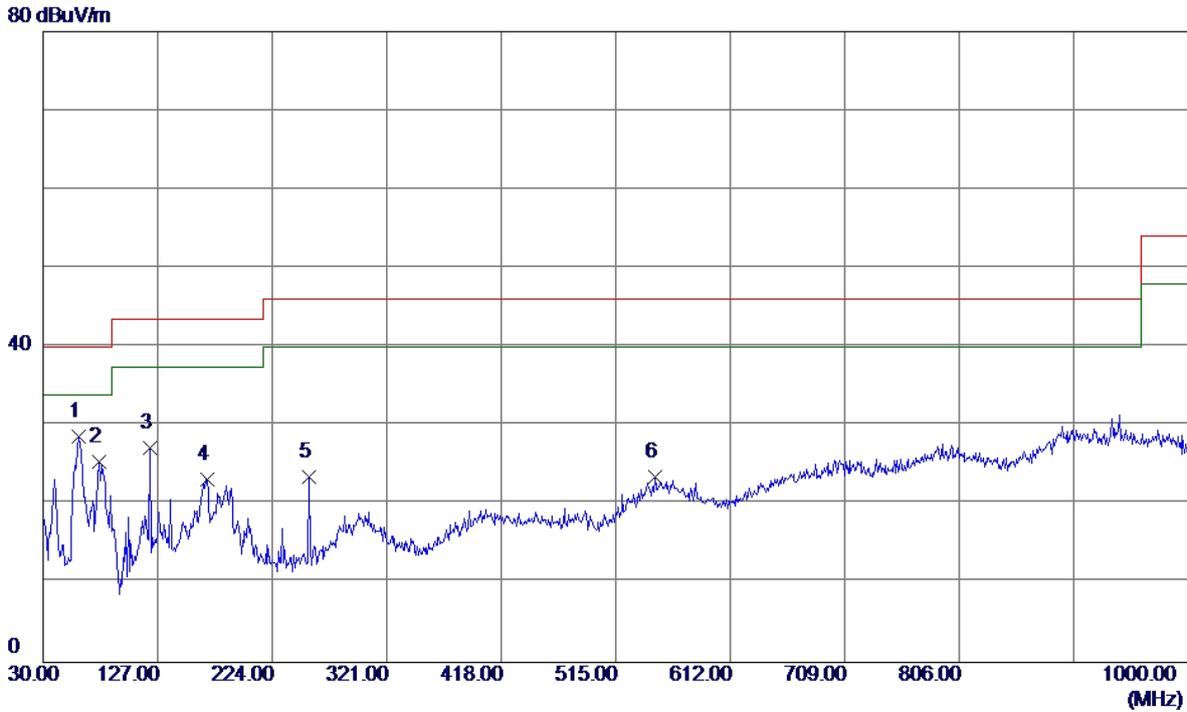

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	60.0700	42.45	-13.74	28.71	40.00	-11.29	Peak	
2	77.5300	41.80	-16.31	25.49	40.00	-14.51	Peak	
3	120.2100	40.70	-13.43	27.27	43.50	-16.23	Peak	
4	168.7100	35.44	-12.23	23.21	43.50	-20.29	Peak	
5	255.0400	37.75	-14.20	23.55	46.00	-22.45	Peak	
6	547.9800	28.22	-4.75	23.47	46.00	-22.53	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: BYD

Horizontal

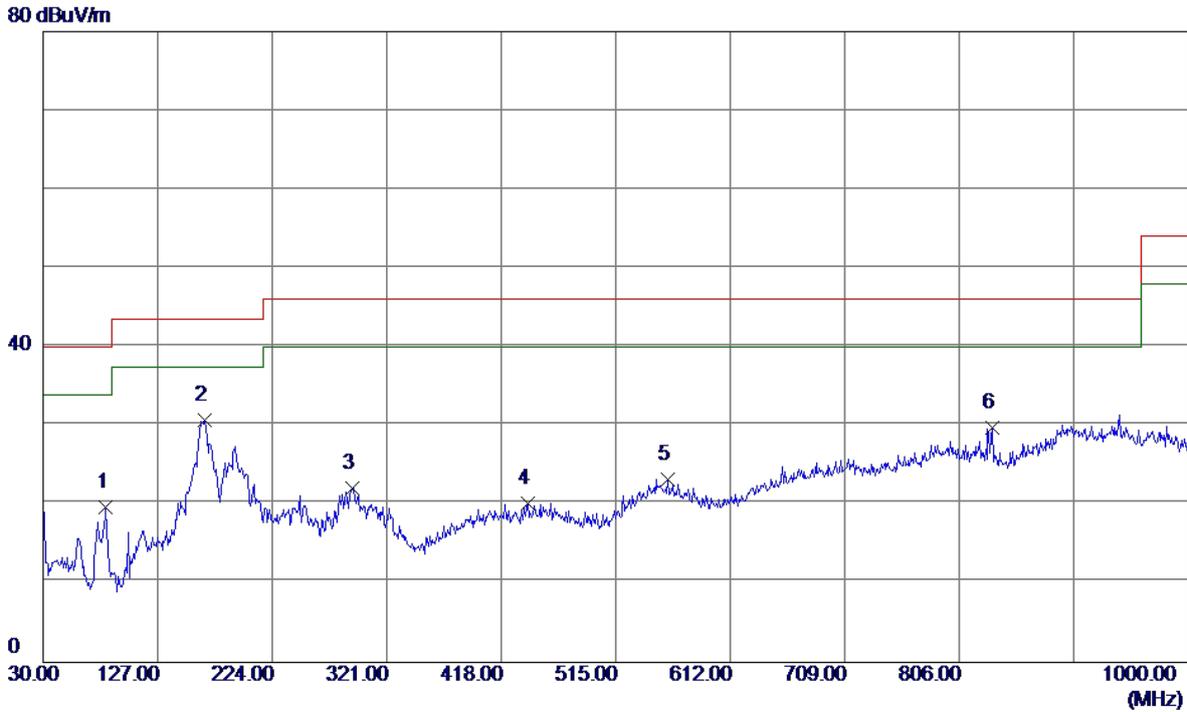


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	83.3500	36.59	-16.95	19.64	40.00	-20.36	Peak	
2 *	166.7700	42.90	-12.21	30.69	43.50	-12.81	Peak	
3	291.9000	33.17	-11.04	22.13	46.00	-23.87	Peak	
4	440.3100	28.11	-7.96	20.15	46.00	-25.85	Peak	
5	559.6200	28.28	-5.02	23.26	46.00	-22.74	Peak	
6	834.1300	30.58	-0.77	29.81	46.00	-16.19	Peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

110 dBuV/m

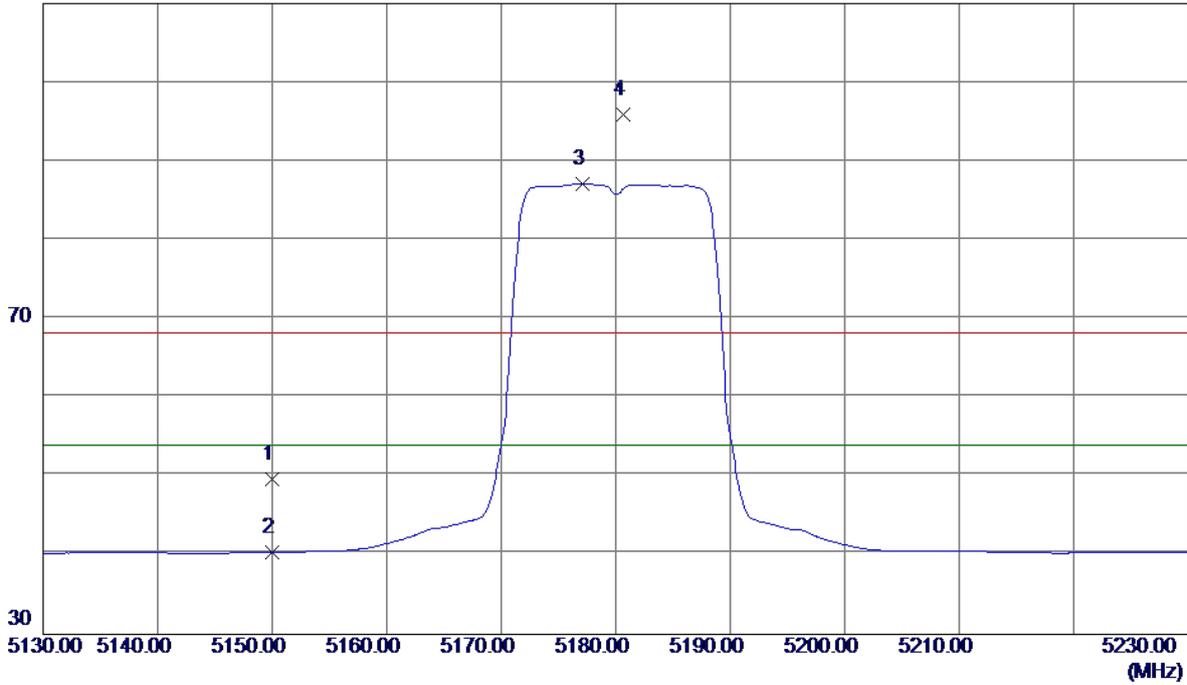


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	9.00	40.62	49.62	68.30	-18.68	Peak	
2	5150.0000	-0.24	40.62	40.38	54.00	-13.62	AVG	
3 *	5177.1000	46.37	40.71	87.08	54.00	33.08	AVG	No Limit
4	5180.7000	55.20	40.73	95.93	68.30	27.63	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical


115 dBuV/m

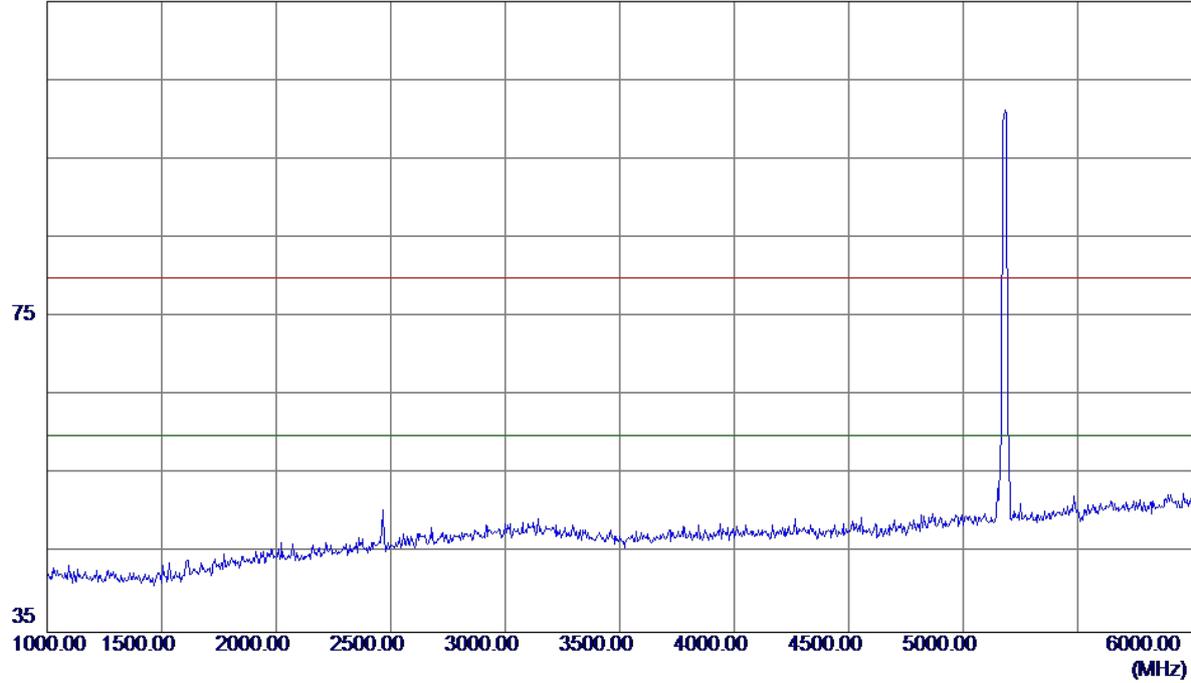

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
	5180	115		115	75	40		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

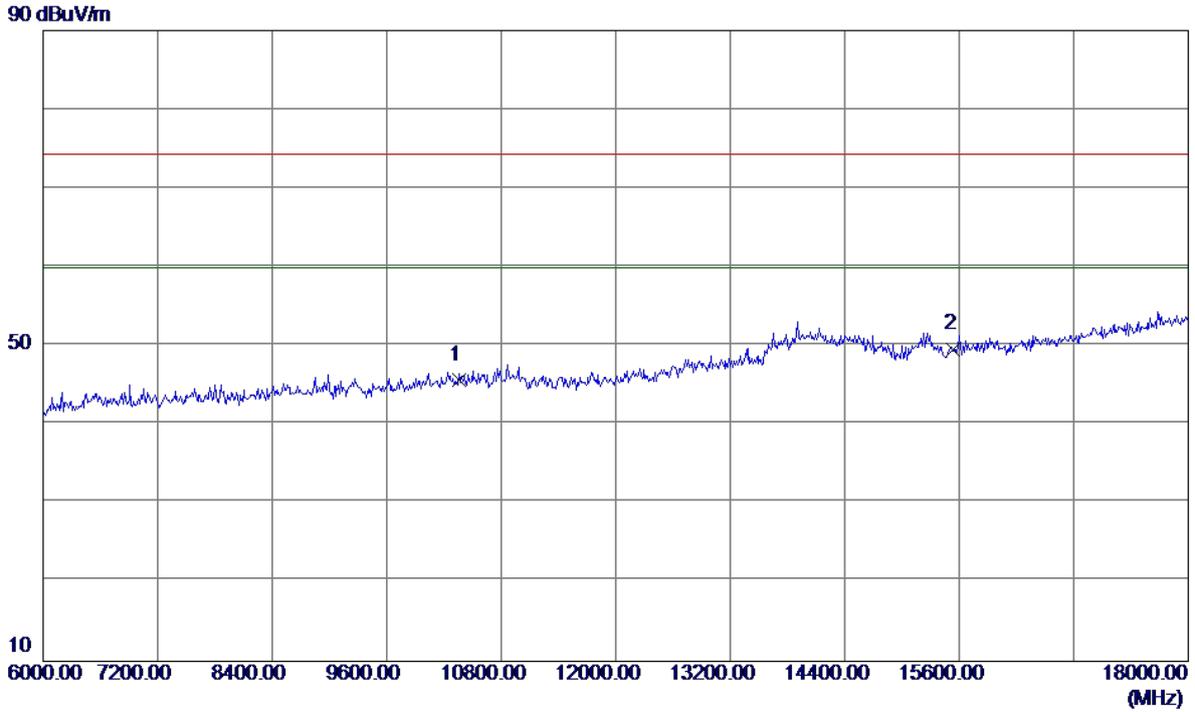


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.0000	30.70	14.96	45.66	74.30	-28.64	Peak	
2 *	15540.0000	31.74	17.86	49.60	74.30	-24.70	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

100 dBuV/m

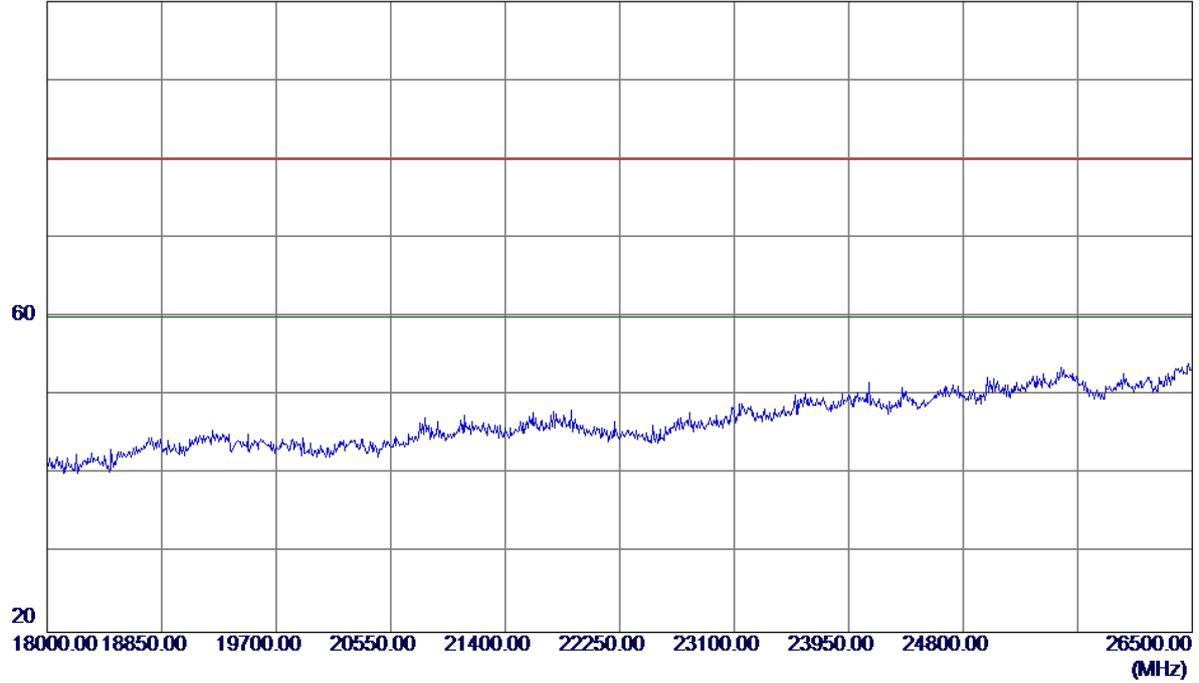


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

110 dBuV/m

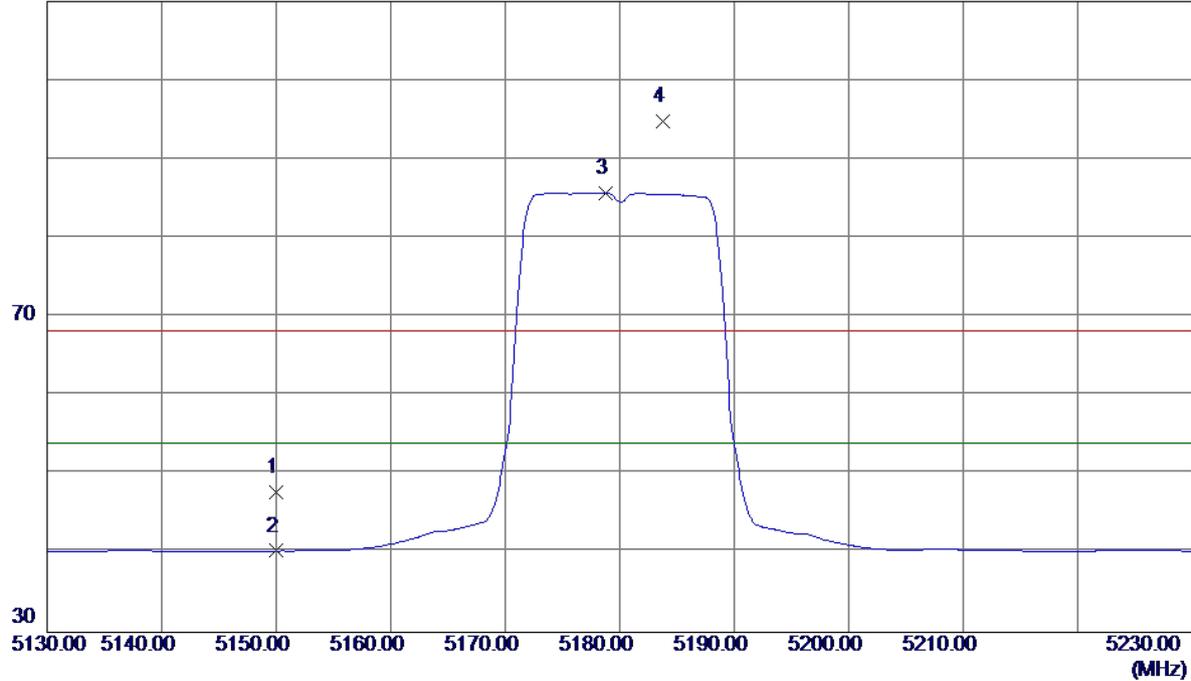


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	7.20	40.62	47.82	68.30	-20.48	Peak	
2	5150.0000	-0.30	40.62	40.32	54.00	-13.68	AVG	
3 *	5178.8000	45.00	40.72	85.72	54.00	31.72	AVG	No Limit
4	5183.8000	54.09	40.74	94.83	68.30	26.53	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal


115 dBuV/m

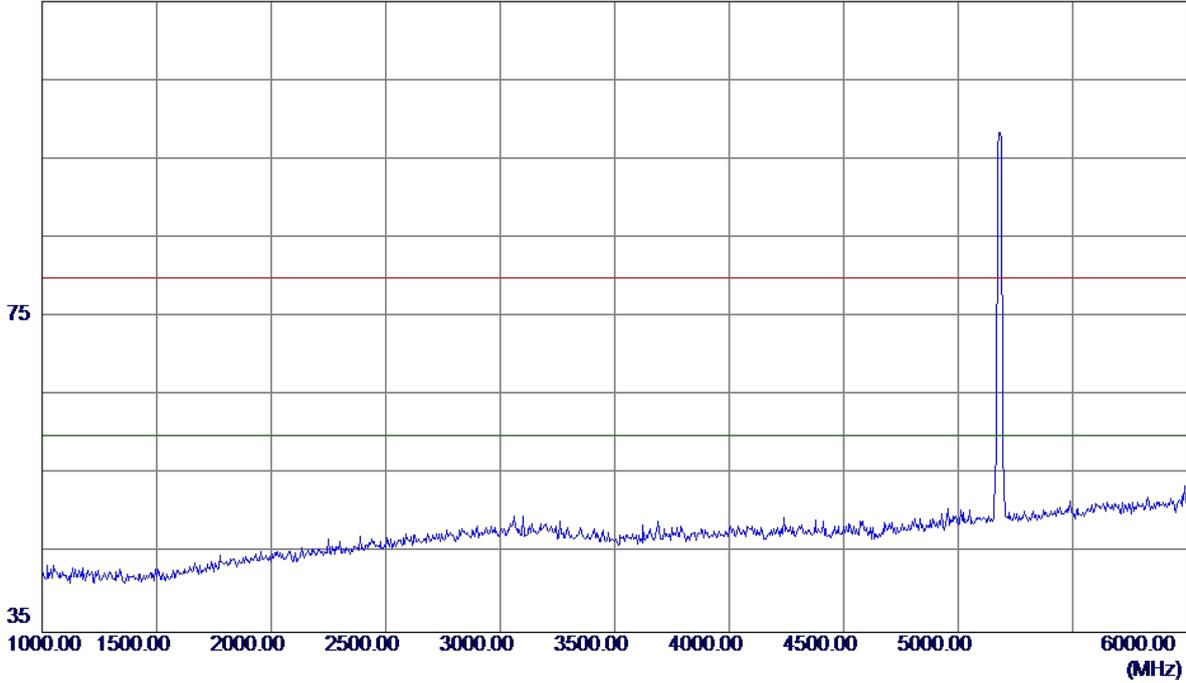

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

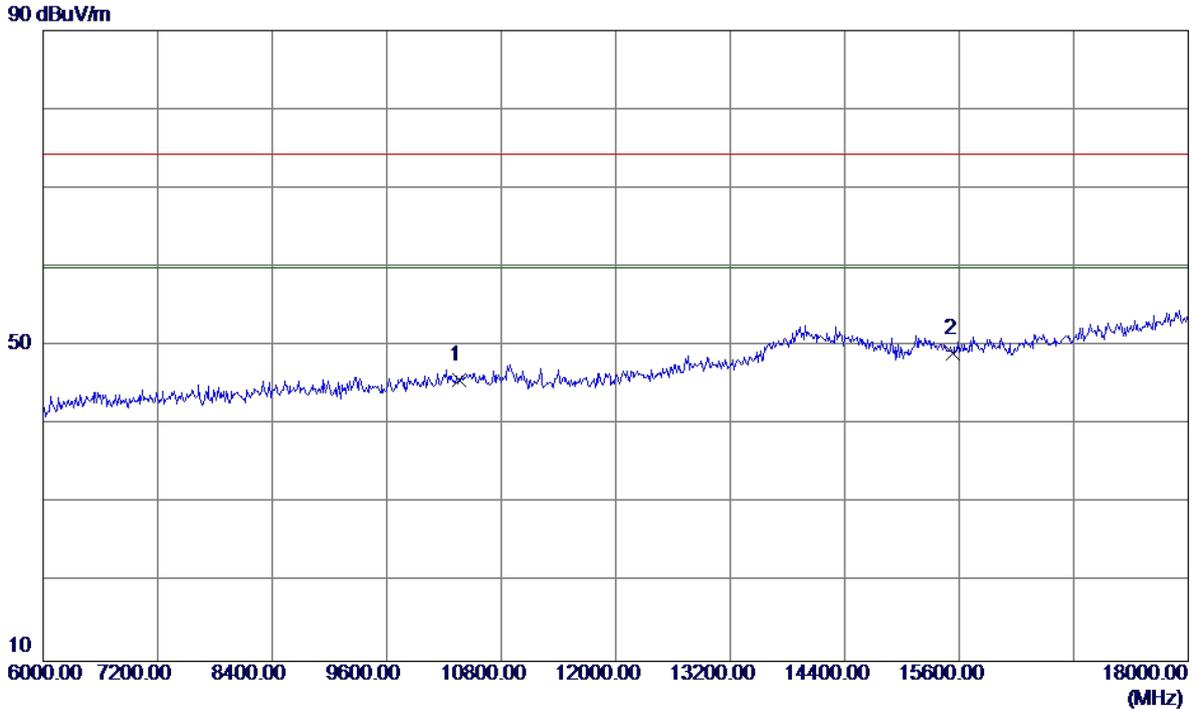


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.0000	30.79	14.96	45.75	74.30	-28.55	Peak	
2 *	15540.0000	31.16	17.86	49.02	74.30	-25.28	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

110 dBuV/m

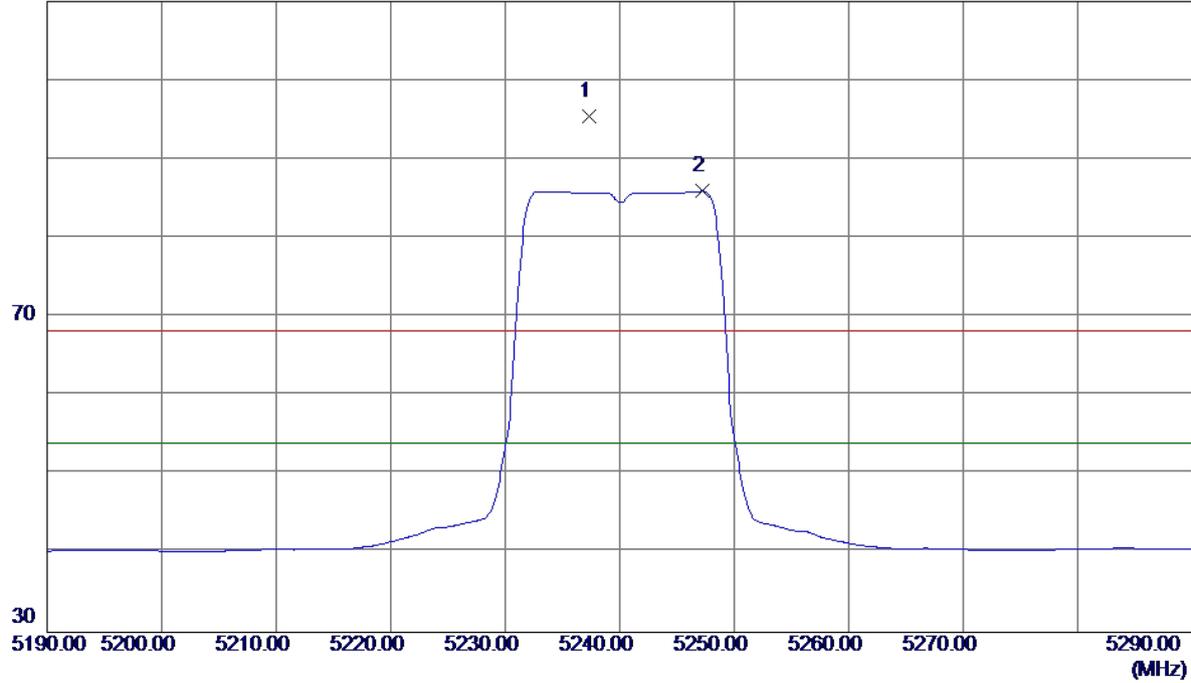


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5237.3000	54.49	40.91	95.40	68.30	27.10	Peak	No Limit
2 *	5247.2000	44.98	40.95	85.93	54.00	31.93	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical


115 dBuV/m

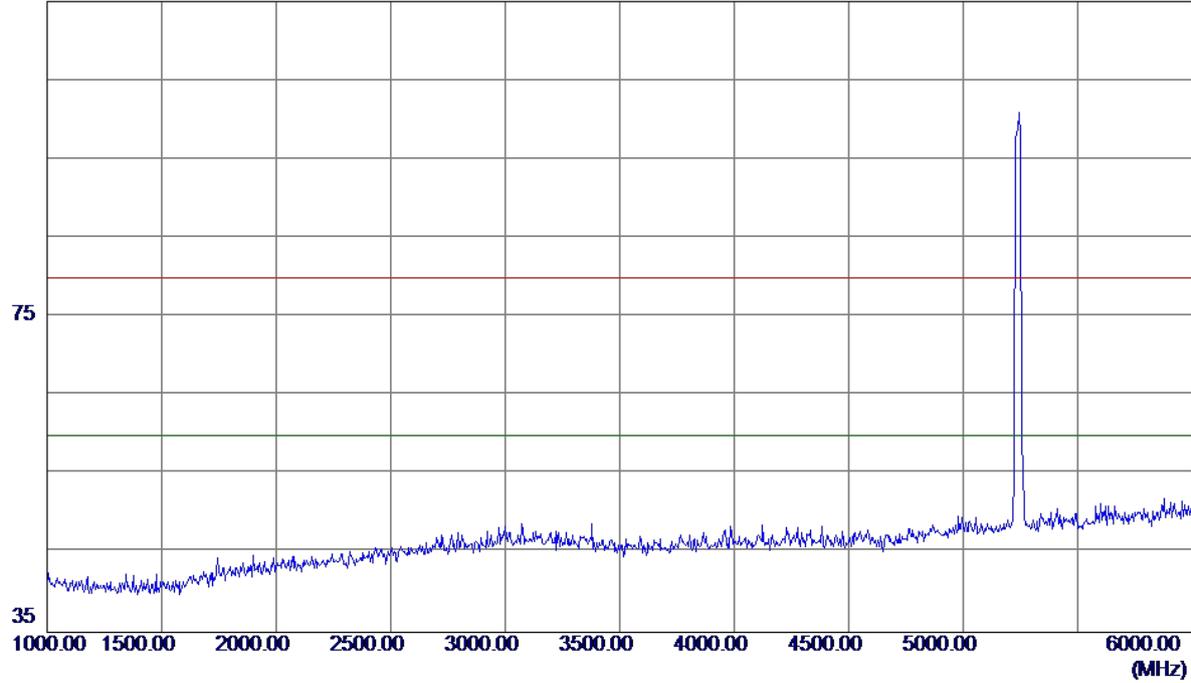

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

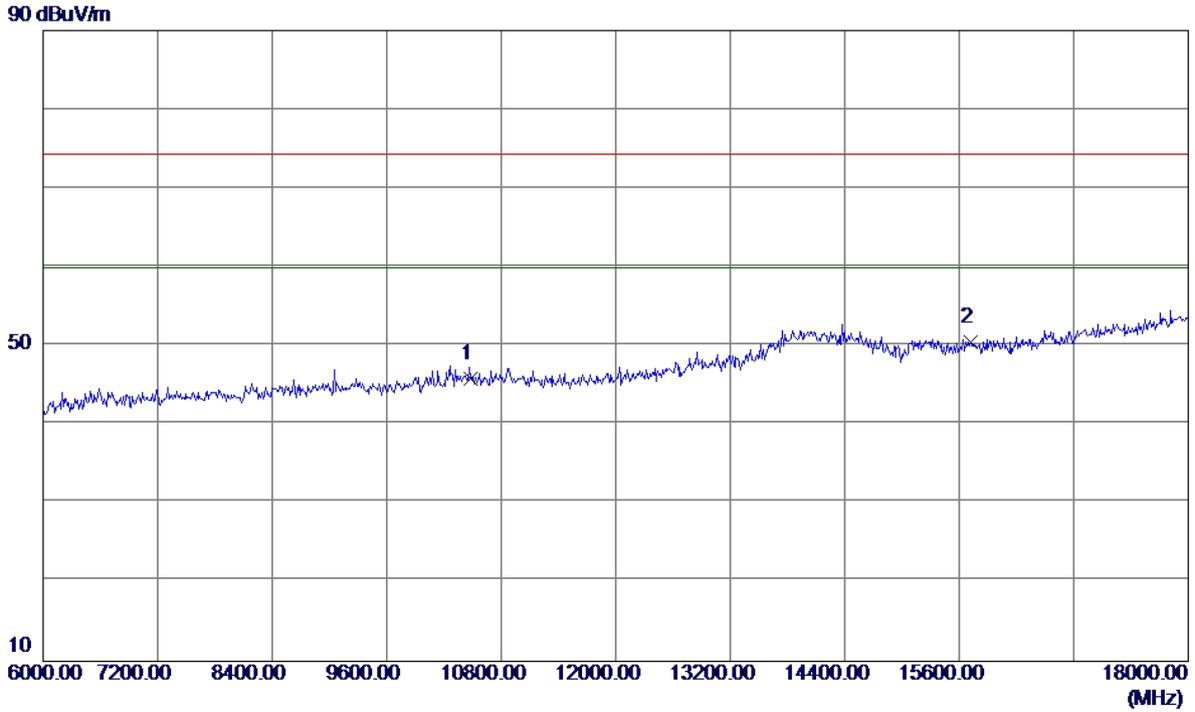


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.0000	30.64	15.24	45.88	74.30	-28.42	Peak	
2 *	15720.0000	32.60	17.86	50.46	74.30	-23.84	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

100 dBuV/m

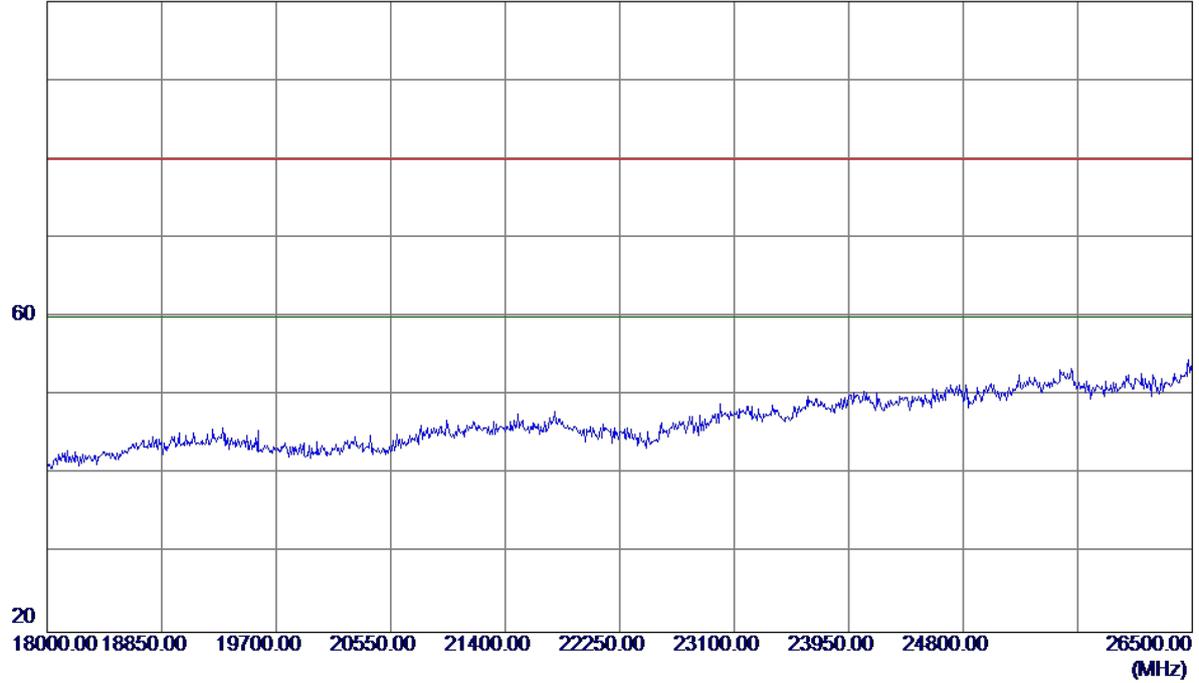

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

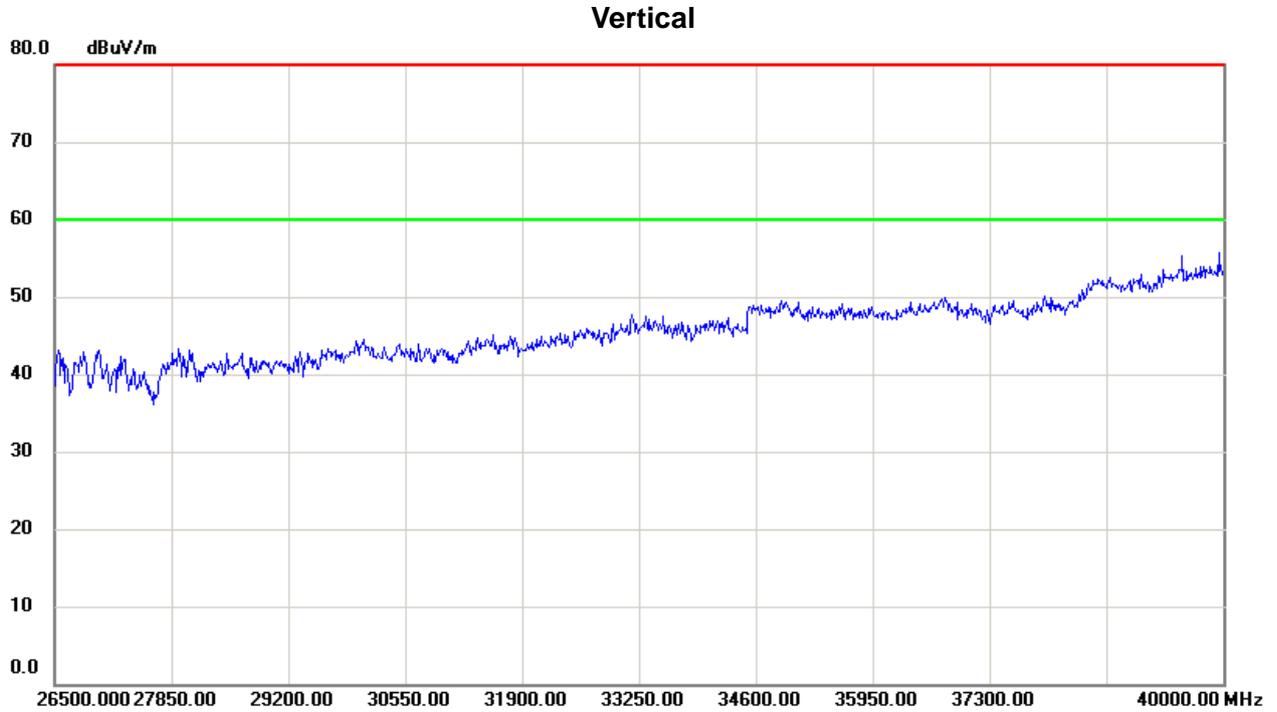


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

110 dBuV/m

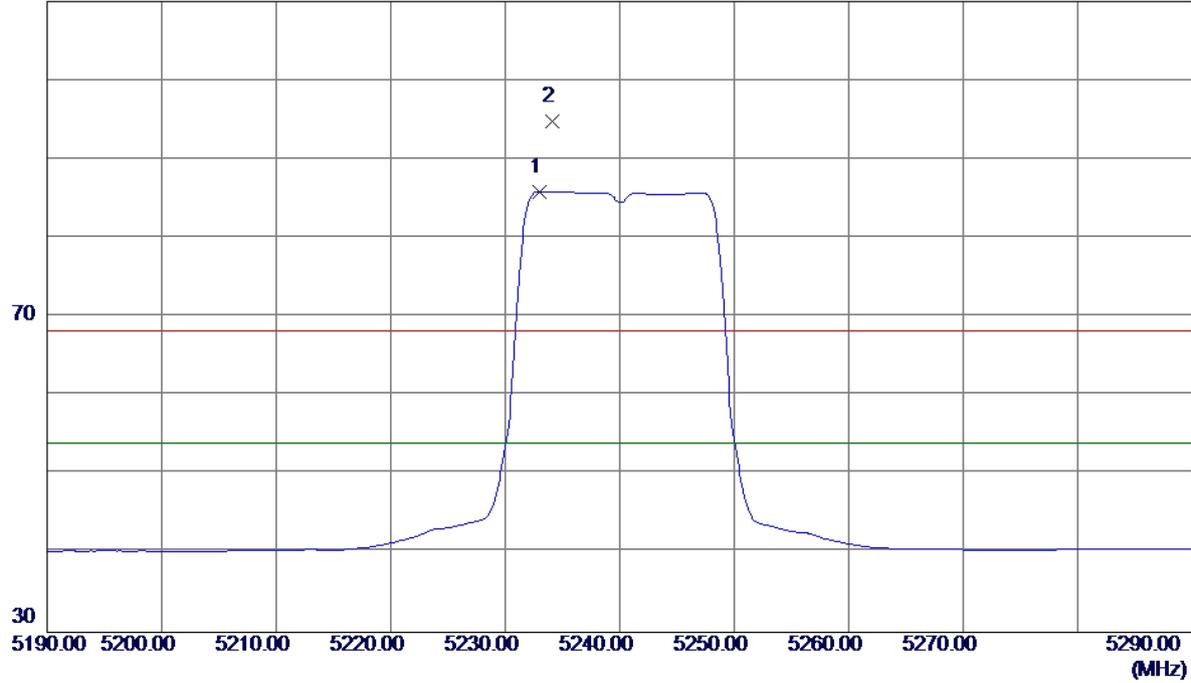


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5233.0000	44.98	40.90	85.88	54.00	31.88	AVG	No Limit
2	5234.1000	53.94	40.90	94.84	68.30	26.54	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal


115 dBuV/m

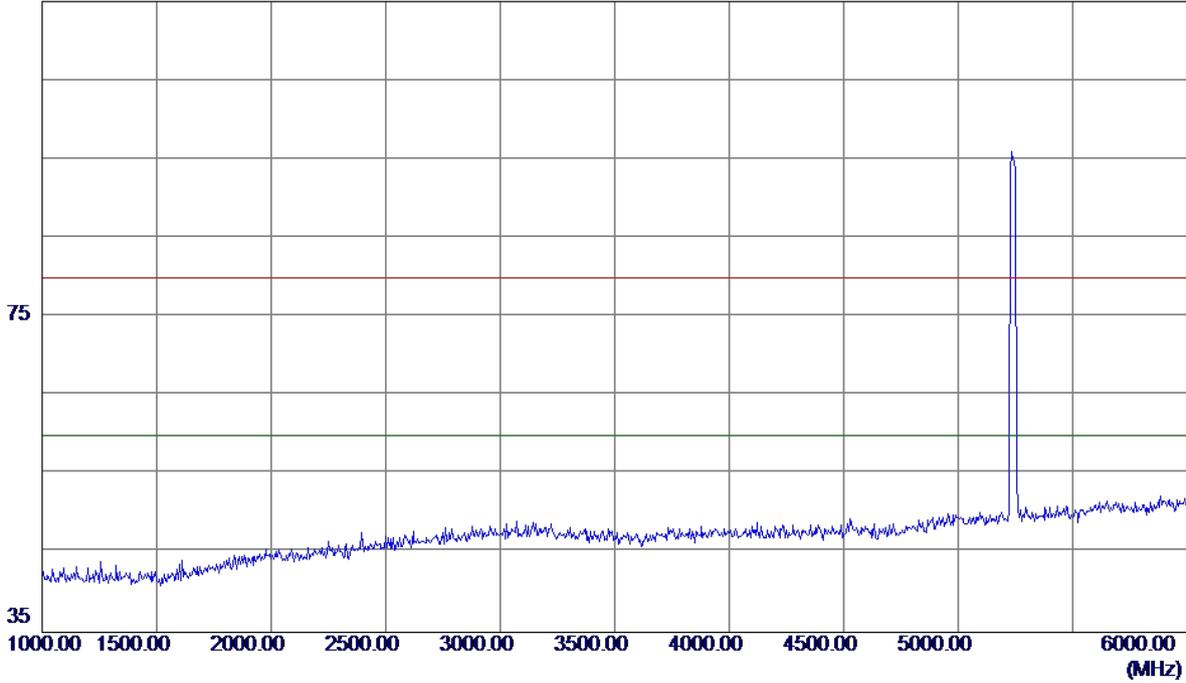

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

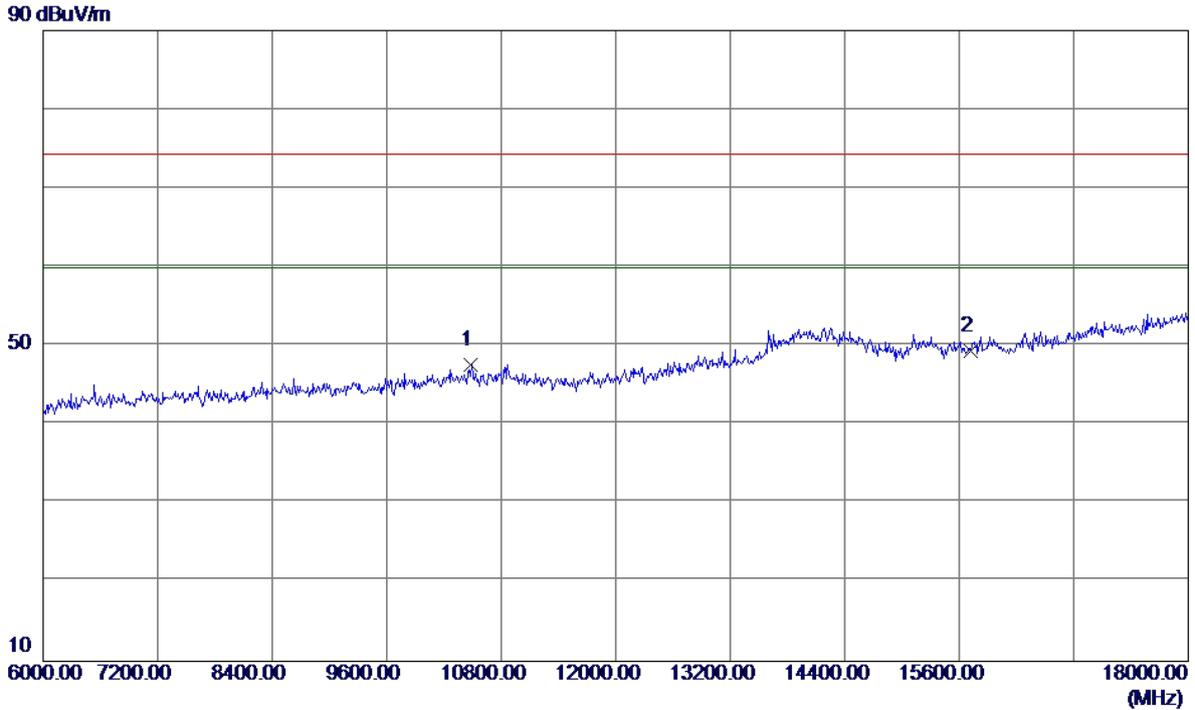


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.0000	32.39	15.24	47.63	74.30	-26.67	Peak	
2 *	15720.0000	31.45	17.86	49.31	74.30	-24.99	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal


100 dBuV/m

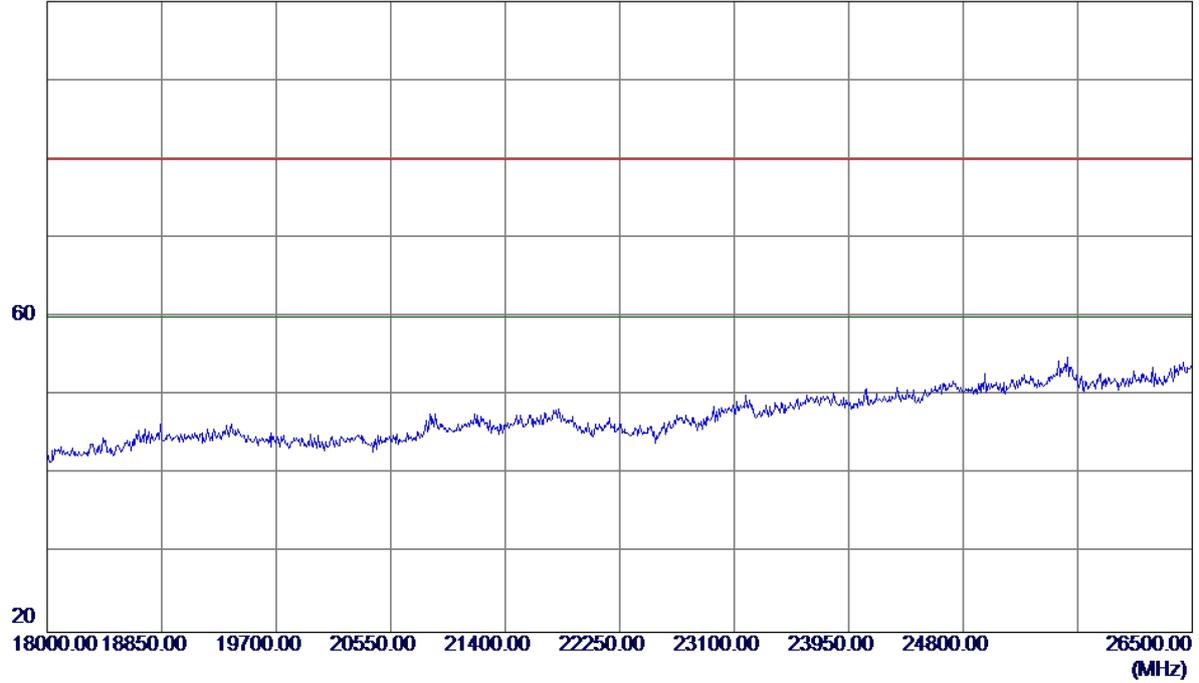

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

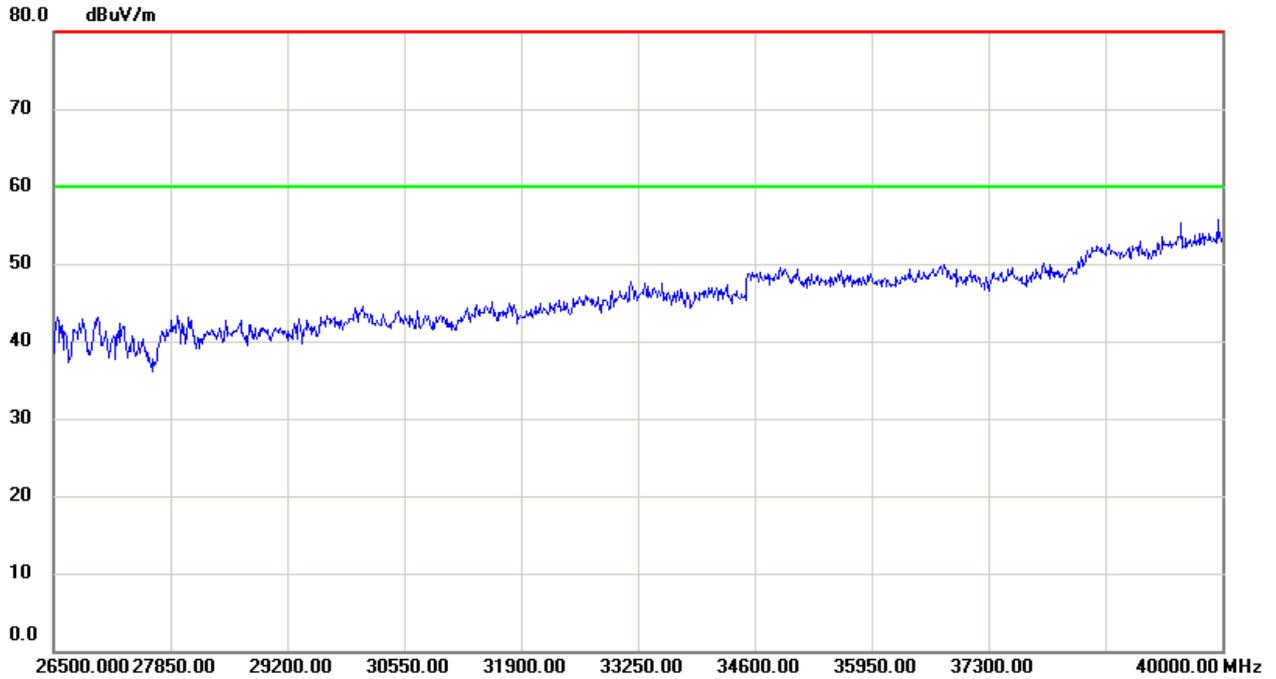


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

110 dBuV/m

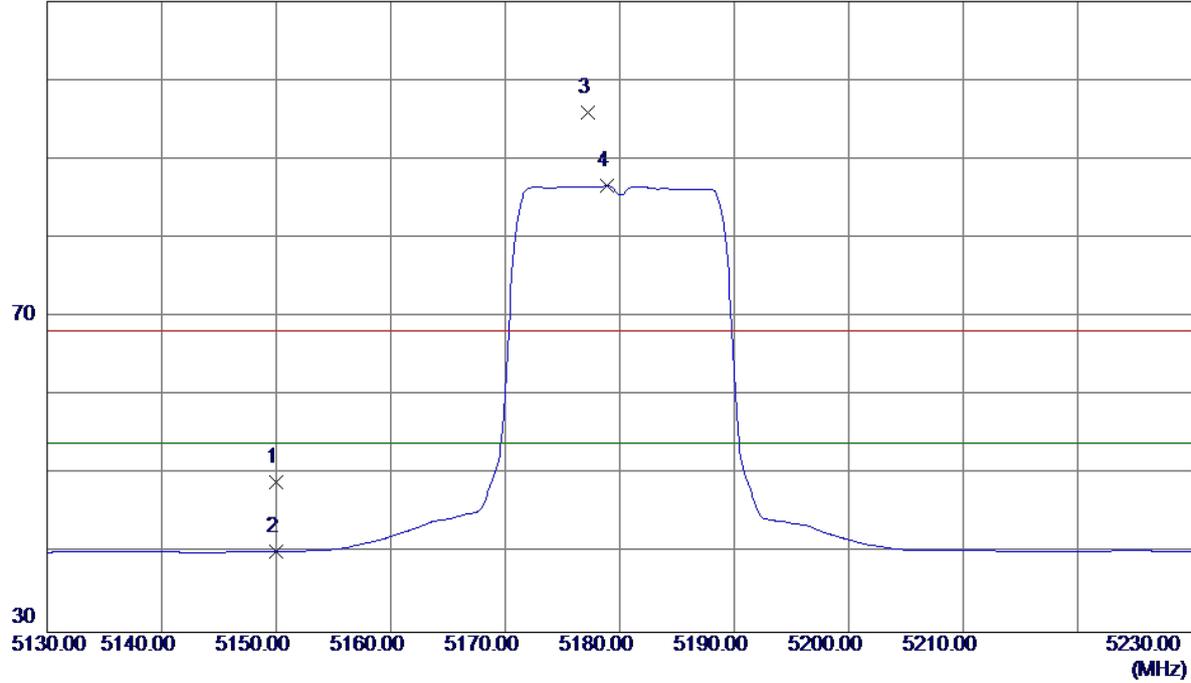


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	8.37	40.62	48.99	68.30	-19.31	Peak	
2	5150.0000	-0.36	40.62	40.26	54.00	-13.74	AVG	
3	5177.2000	55.26	40.71	95.97	68.30	27.67	Peak	No Limit
4 *	5178.9000	45.86	40.72	86.58	54.00	32.58	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical


115 dBuV/m

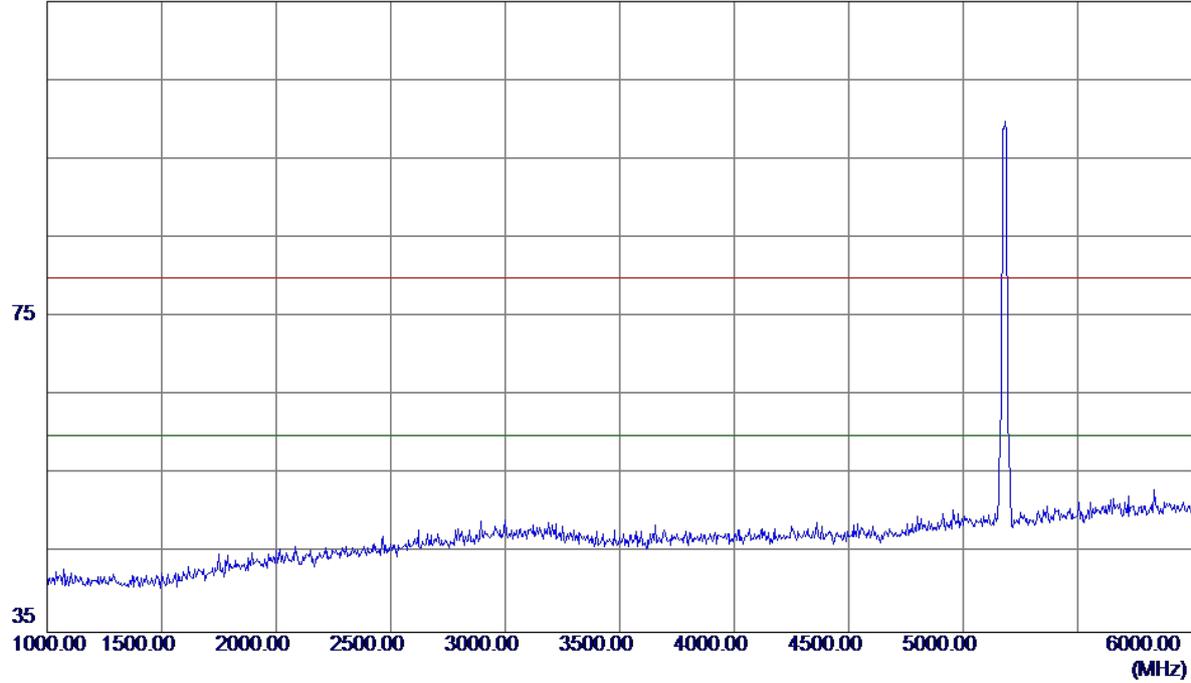

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

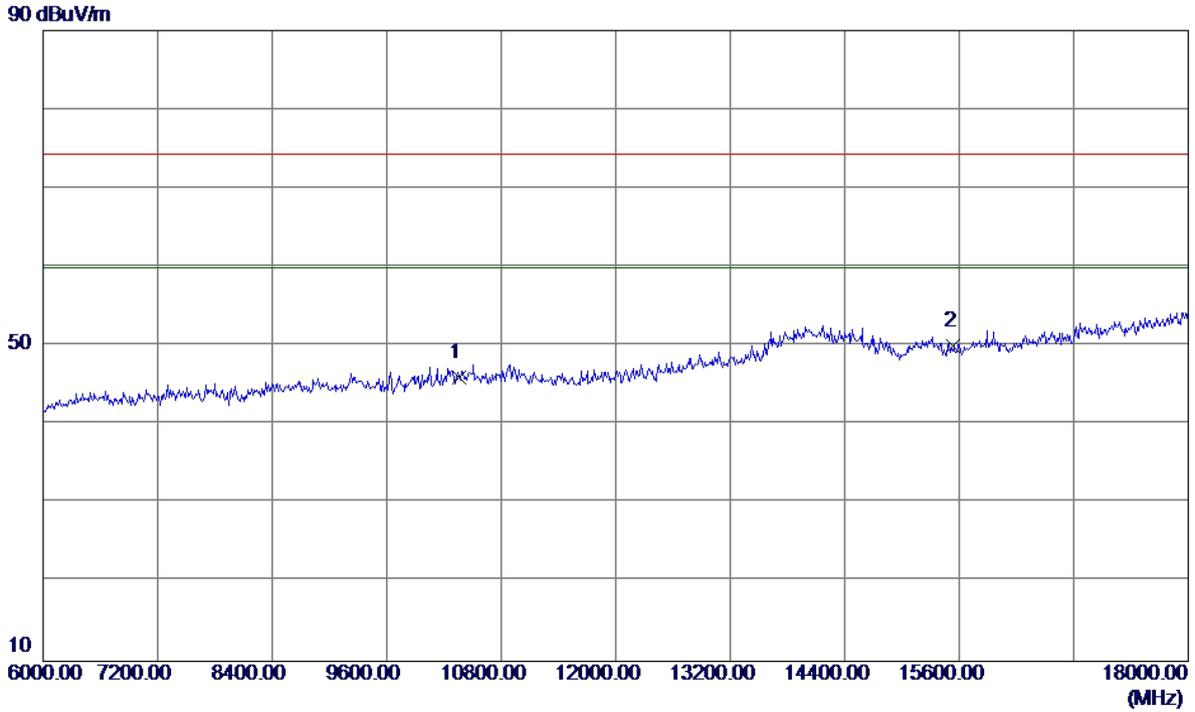


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.0000	31.02	14.96	45.98	74.30	-28.32	Peak	
2 *	15540.0000	32.21	17.86	50.07	74.30	-24.23	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Vertical

100 dBuV/m

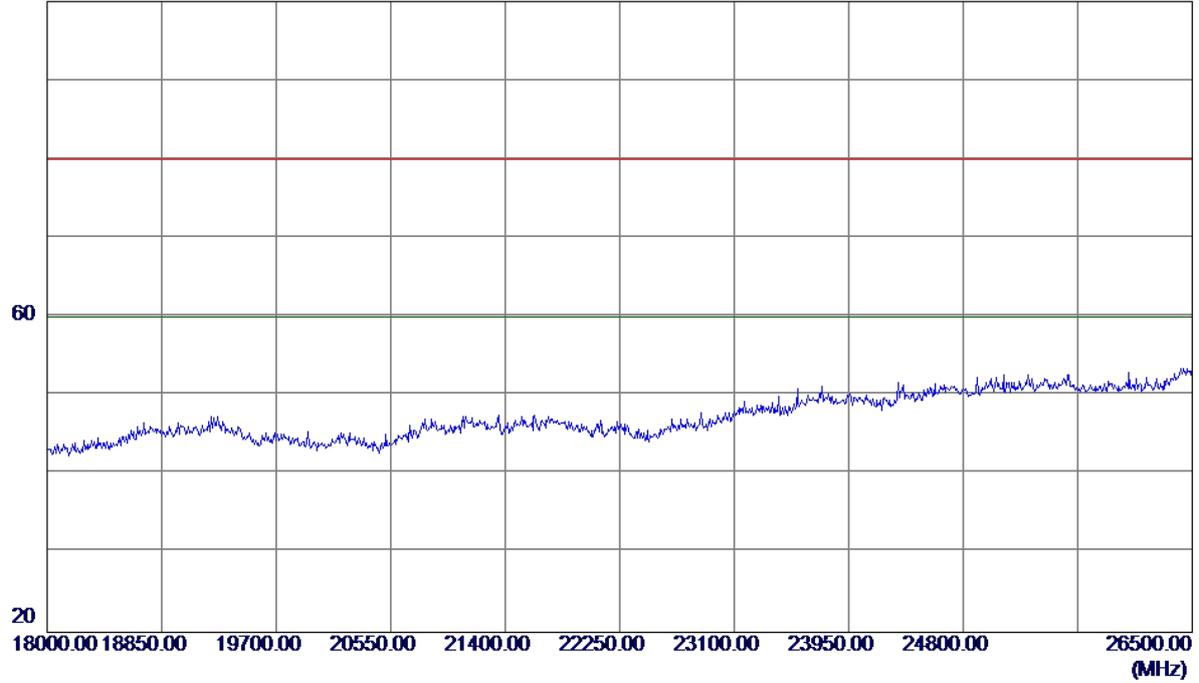

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

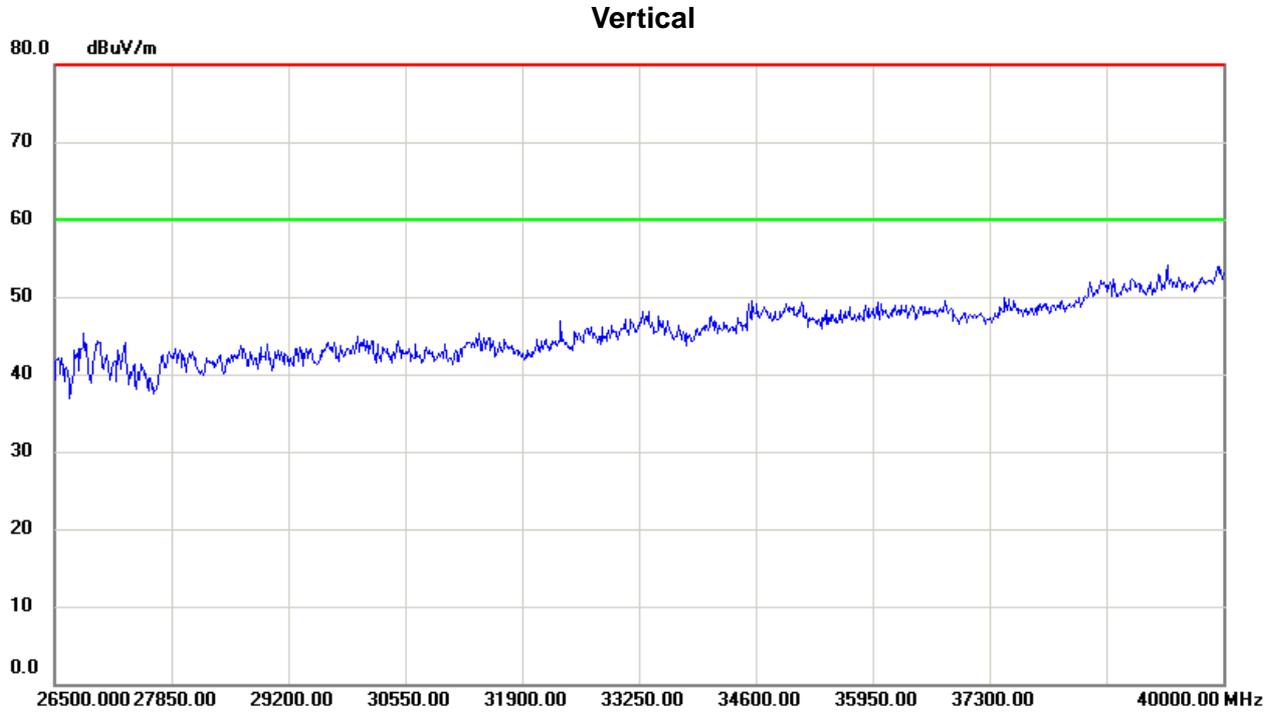


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

110 dBuV/m

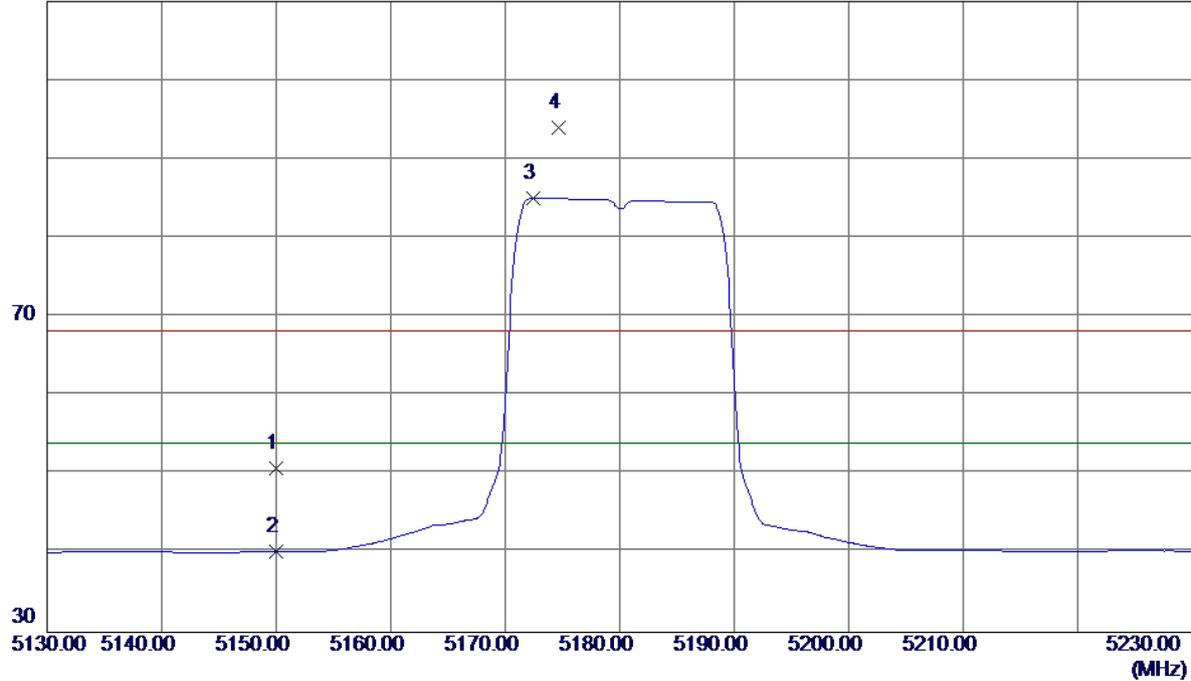


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	10.19	40.62	50.81	68.30	-17.49	Peak	
2	5150.0000	-0.39	40.62	40.23	54.00	-13.77	AVG	
3 *	5172.4000	44.33	40.70	85.03	54.00	31.03	AVG	No Limit
4	5174.7000	53.26	40.71	93.97	68.30	25.67	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal


115 dBuV/m

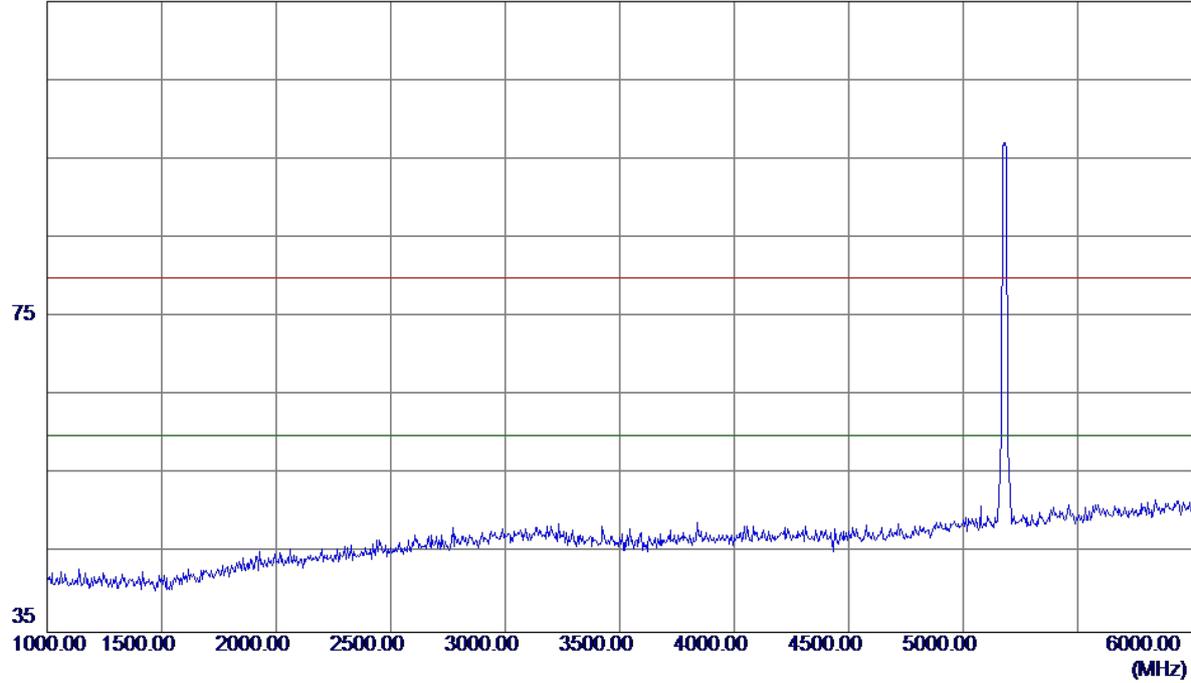

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

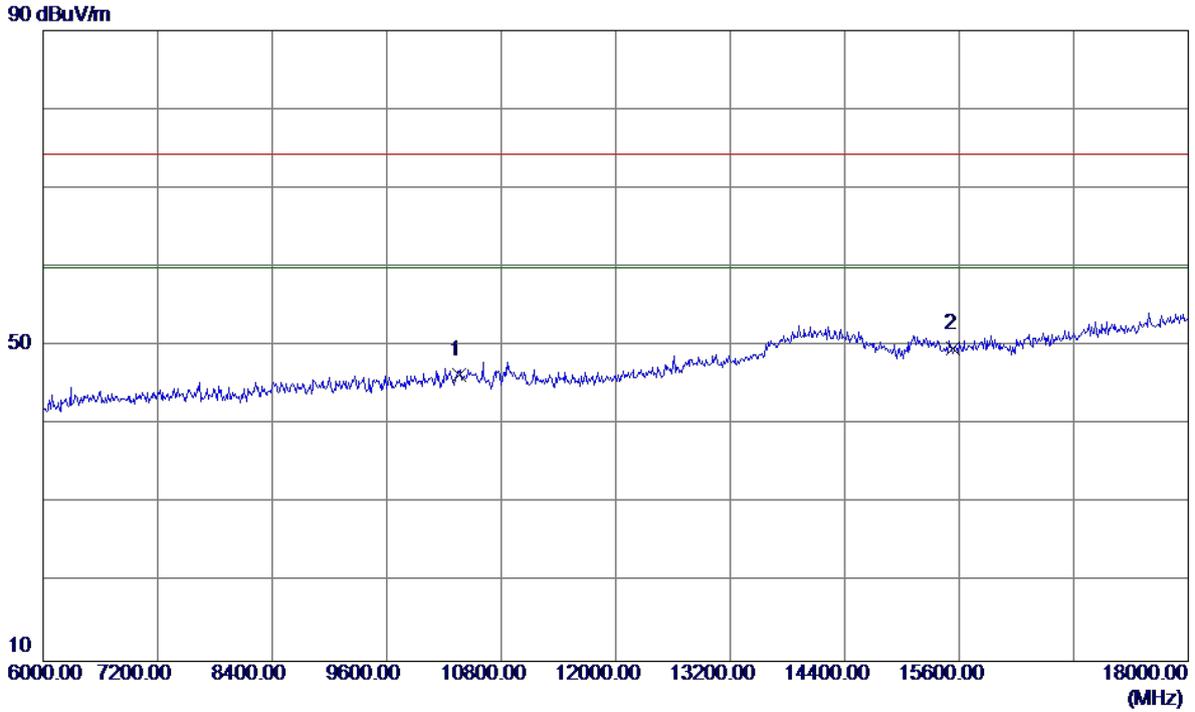


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.0000	31.29	14.96	46.25	74.30	-28.05	Peak	
2 *	15540.0000	31.77	17.86	49.63	74.30	-24.67	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal


100 dBuV/m

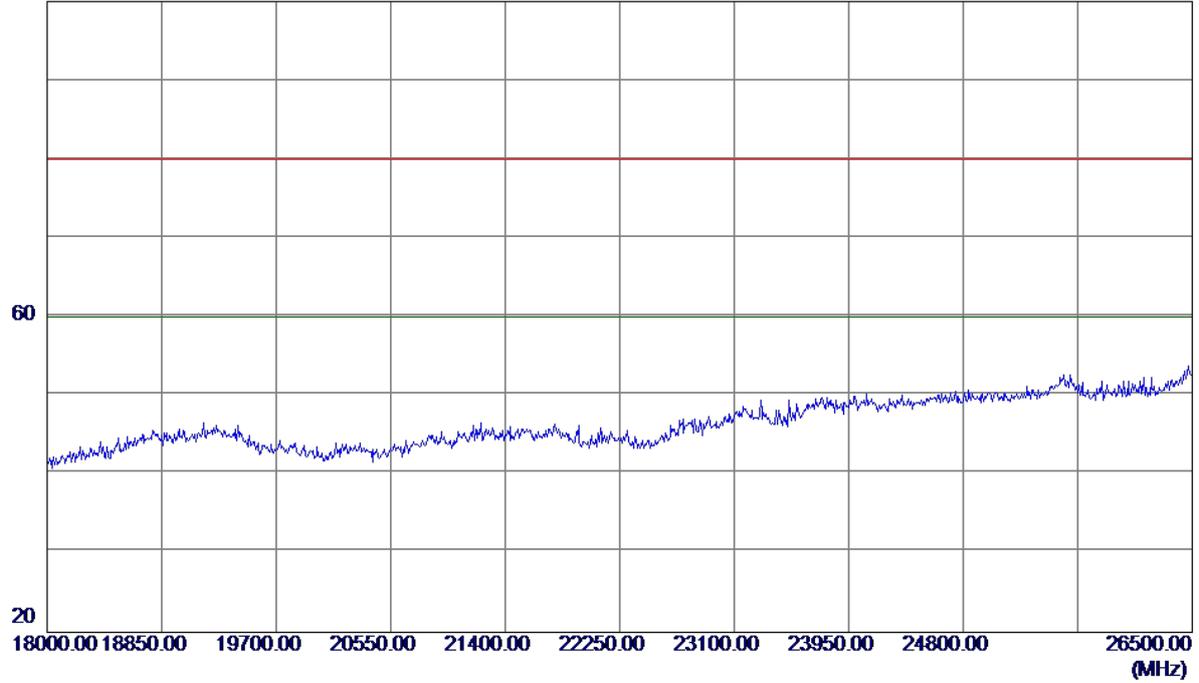

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

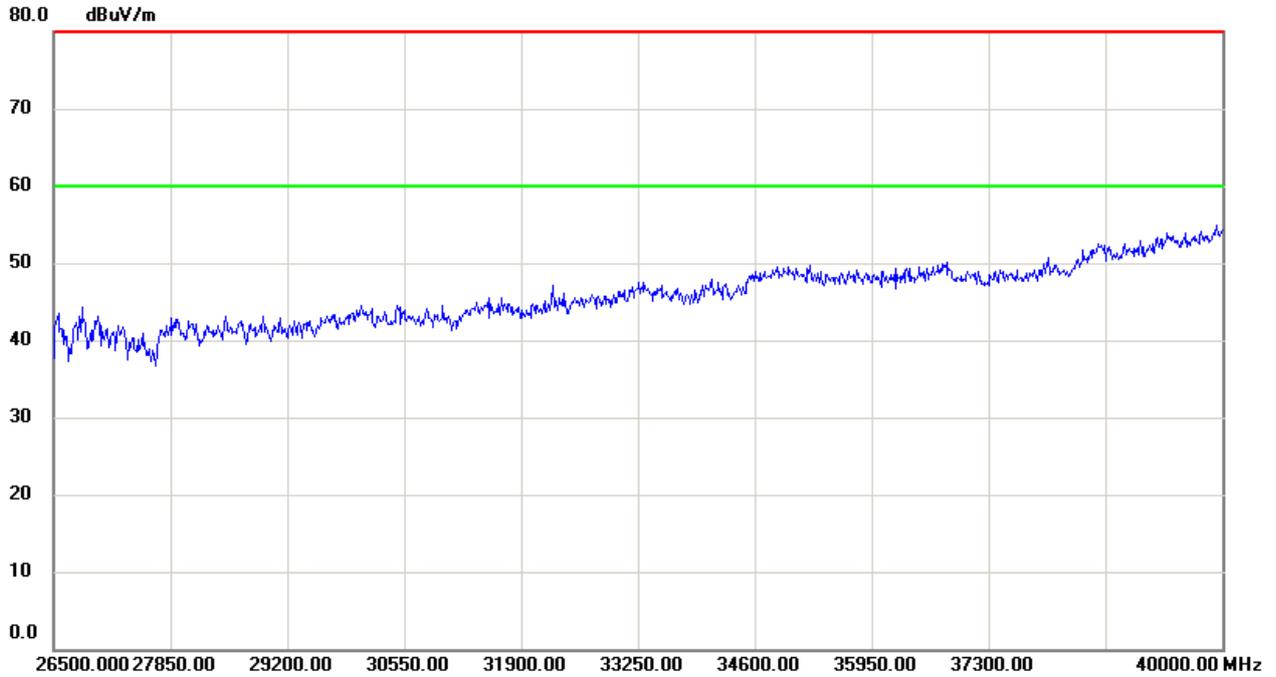


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical


110 dBuV/m

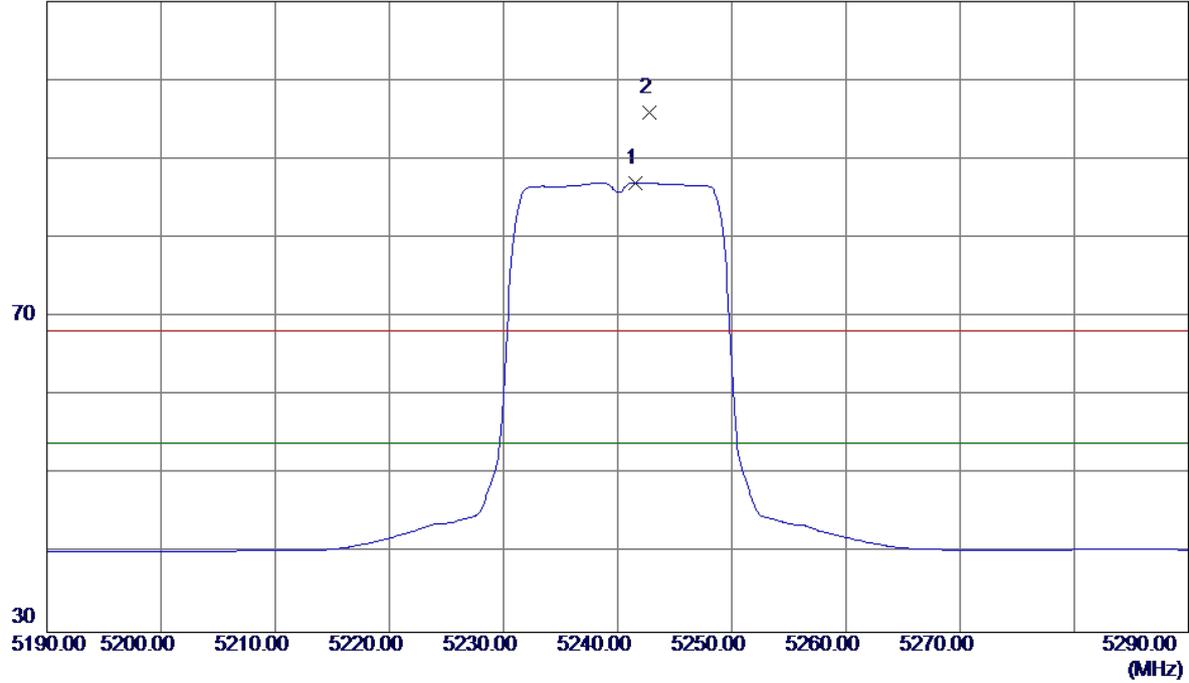

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5241.6000	46.07	40.93	87.00	54.00	33.00	AVG	No Limit
2	5242.8000	55.01	40.93	95.94	68.30	27.64	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Vertical

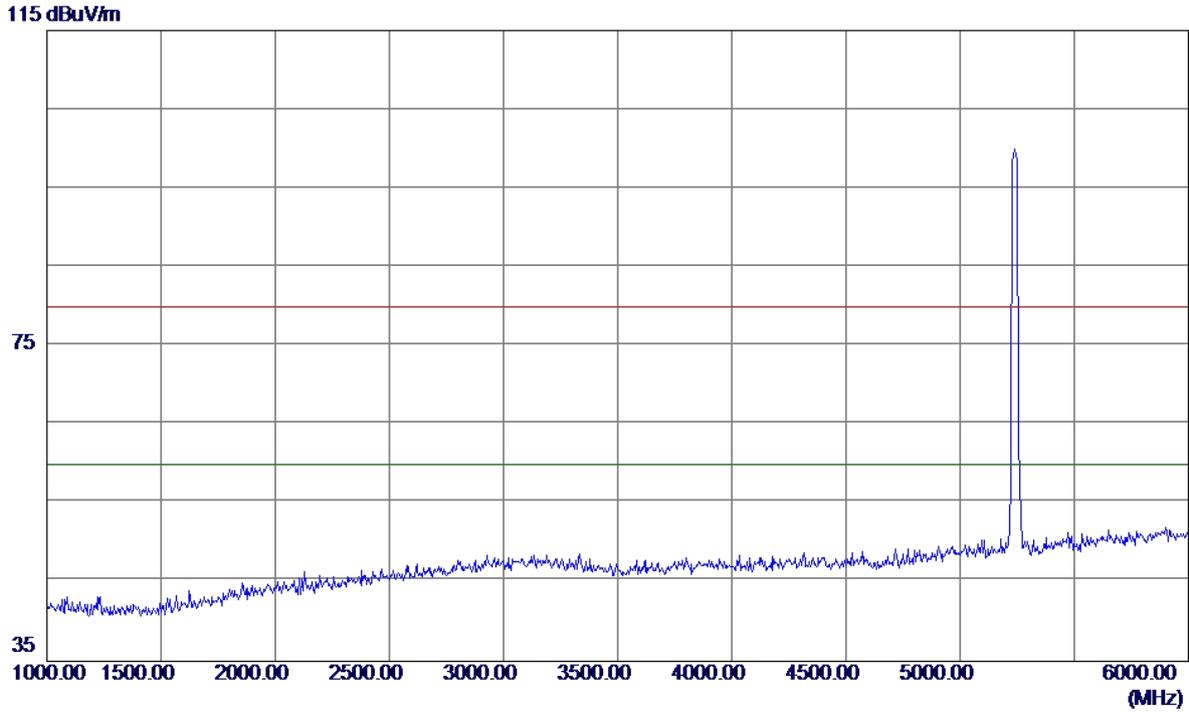

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

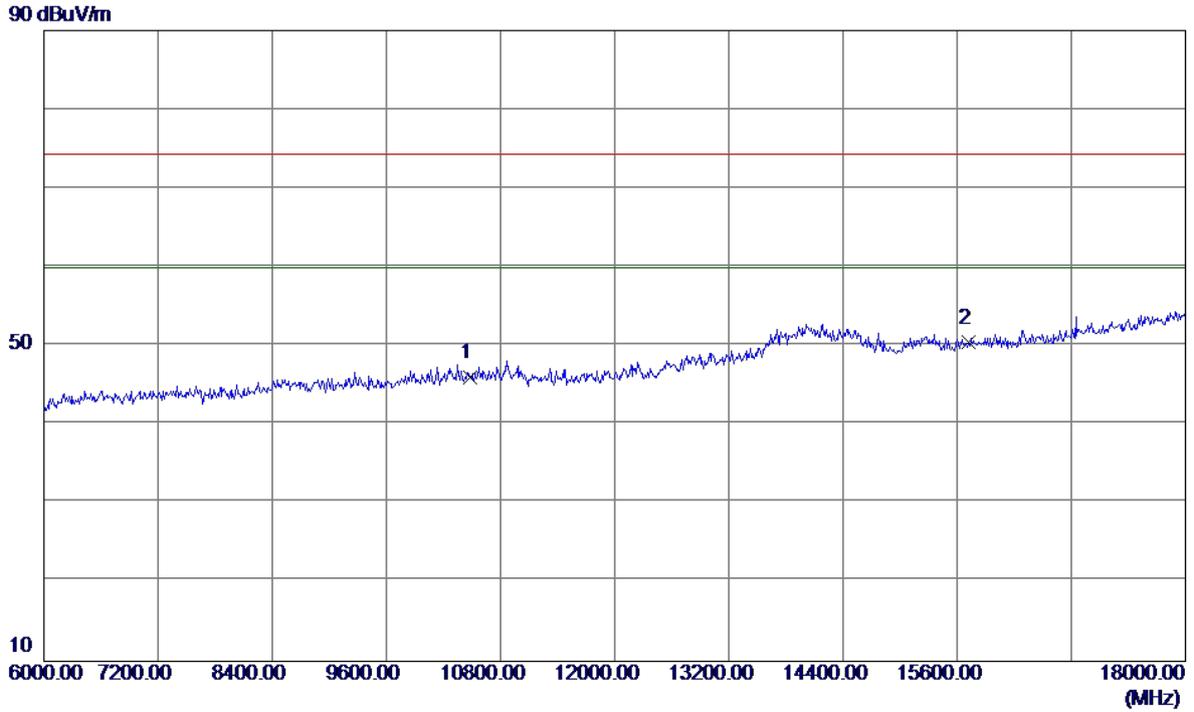

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.0000	30.79	15.24	46.03	74.30	-28.27	Peak	
2 *	15720.0000	32.54	17.86	50.40	74.30	-23.90	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical


100 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

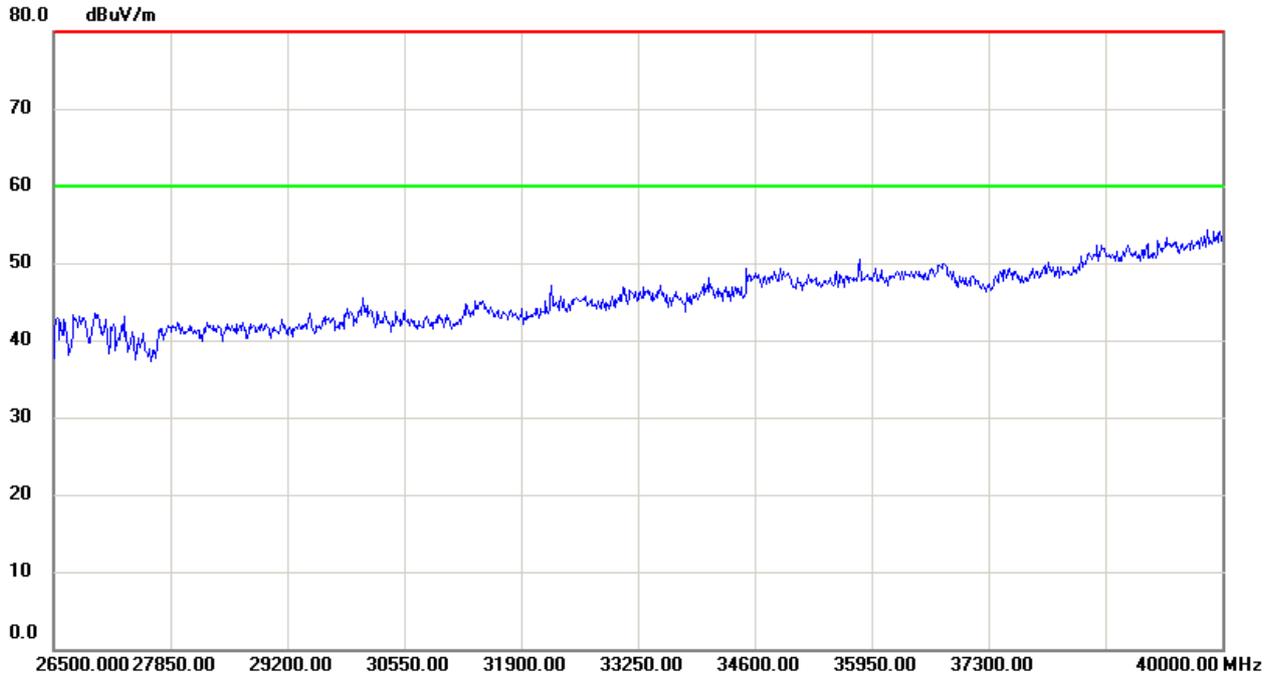


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

110 dBuV/m

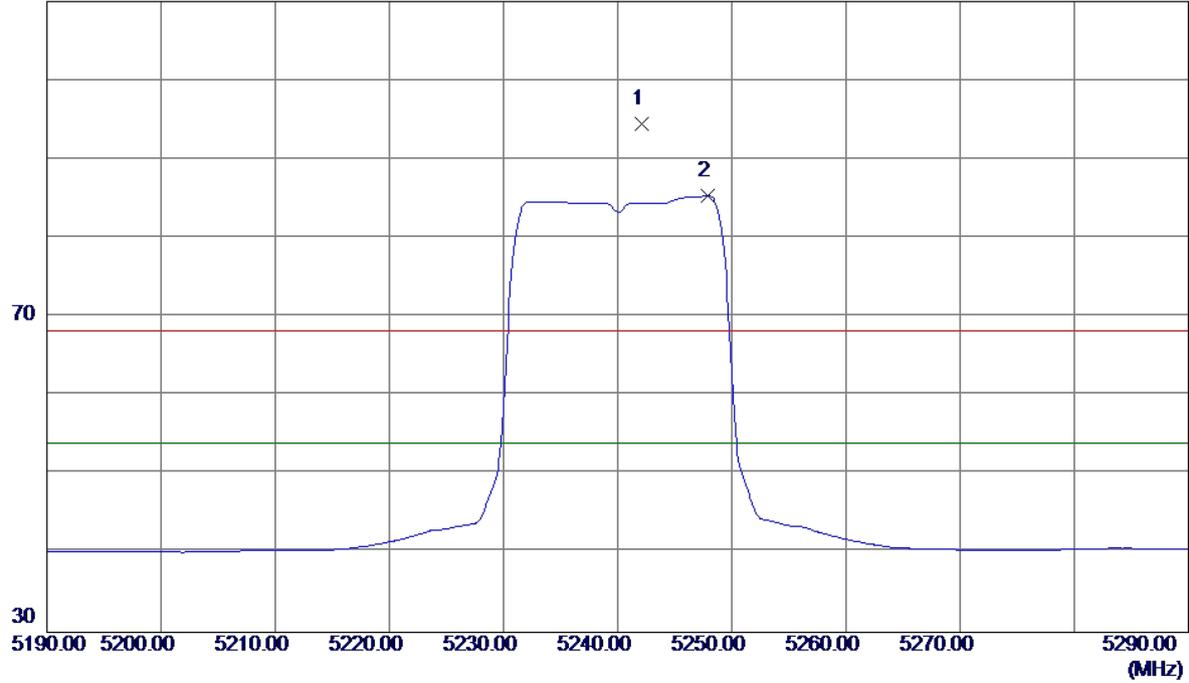


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5242.1000	53.49	40.93	94.42	68.30	26.12	Peak	No Limit
2 *	5247.9000	44.39	40.95	85.34	54.00	31.34	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal


115 dBuV/m

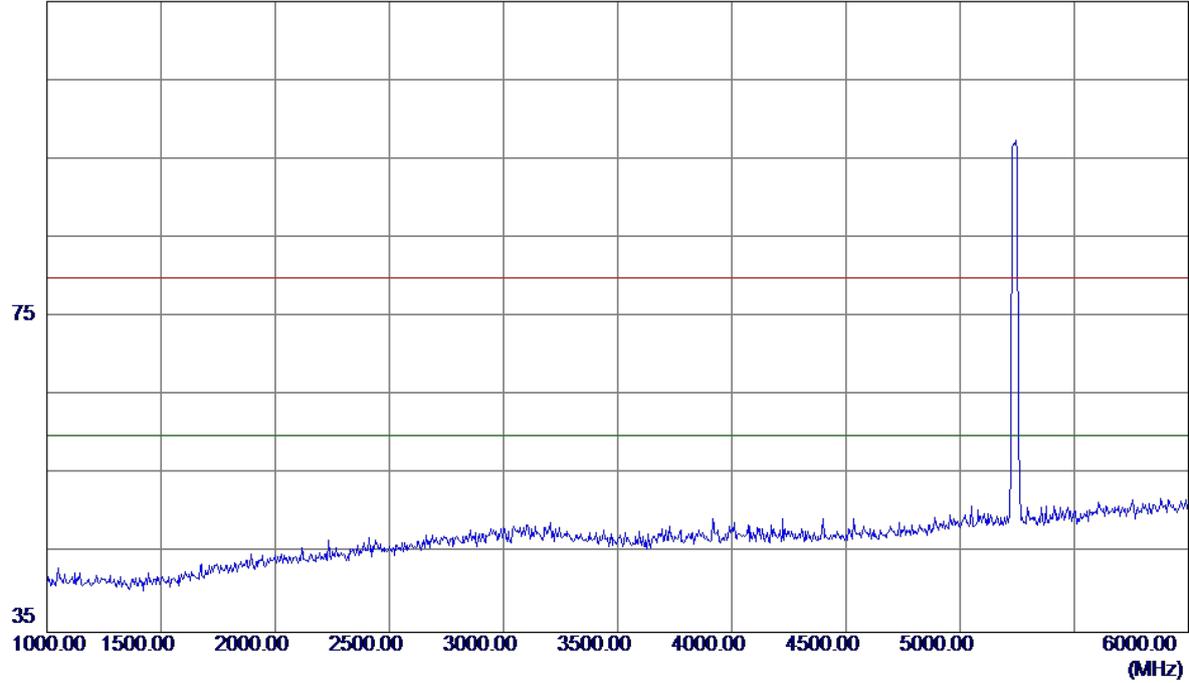

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

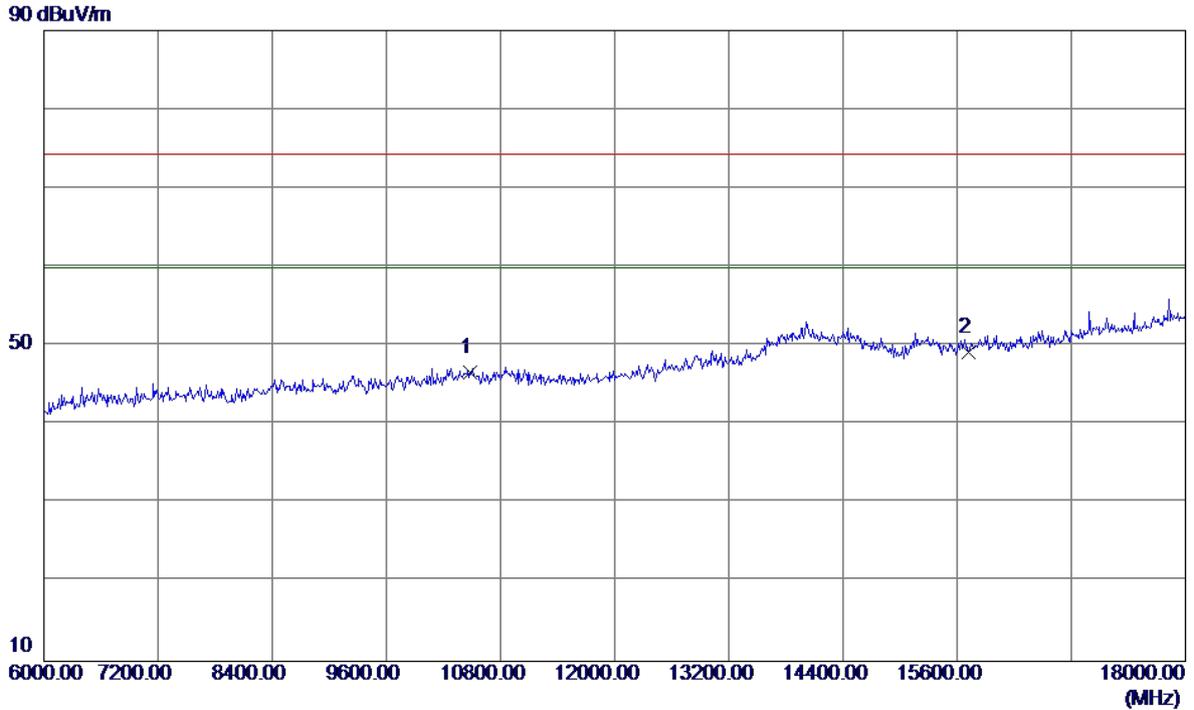


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.0000	31.38	15.24	46.62	74.30	-27.68	Peak	
2 *	15720.0000	31.36	17.86	49.22	74.30	-25.08	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal


100 dBuV/m

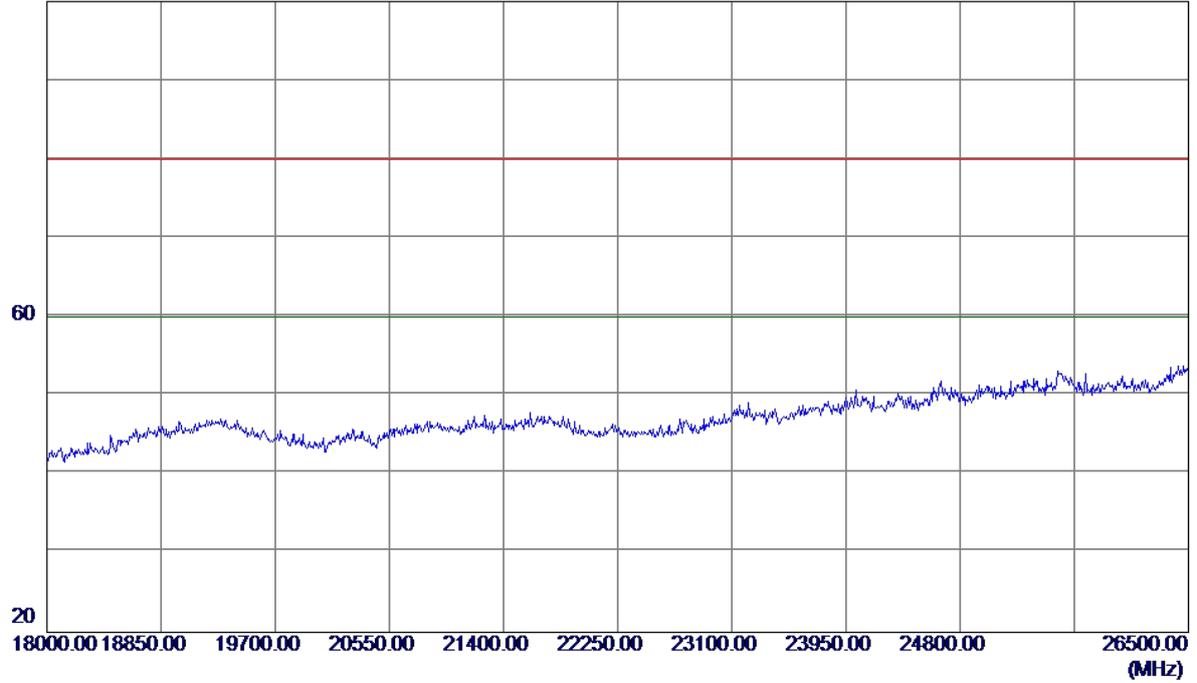

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

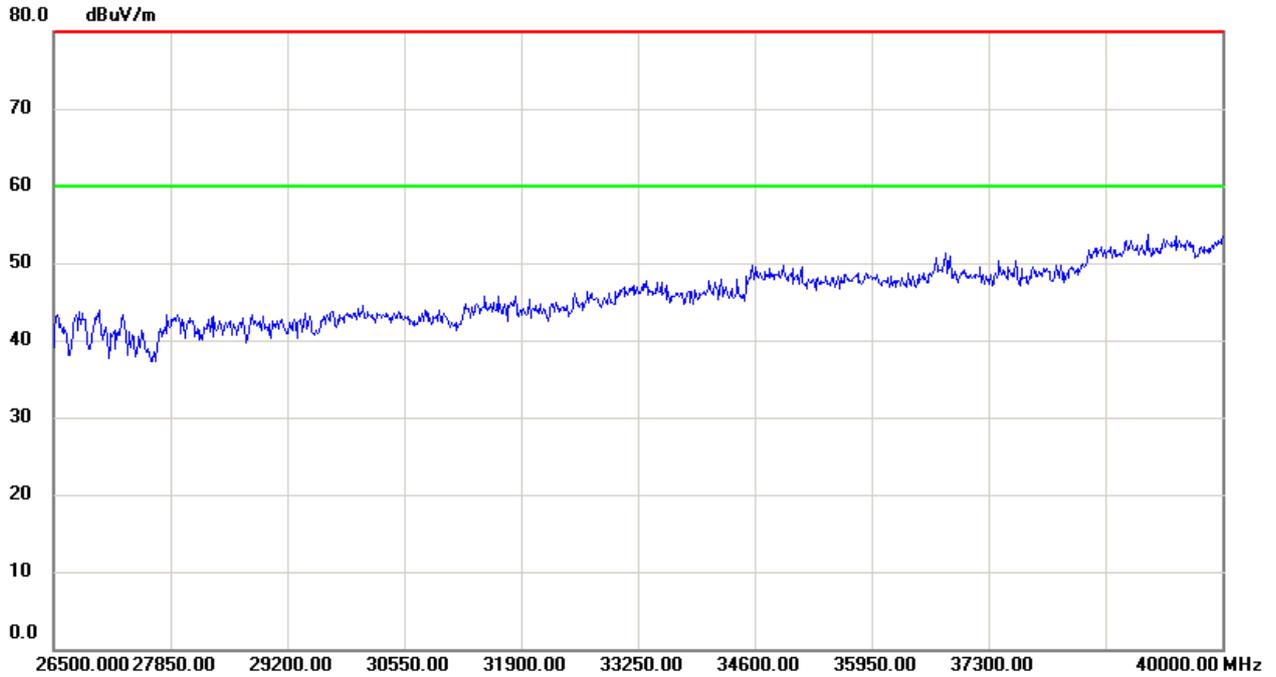


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical


110 dBuV/m

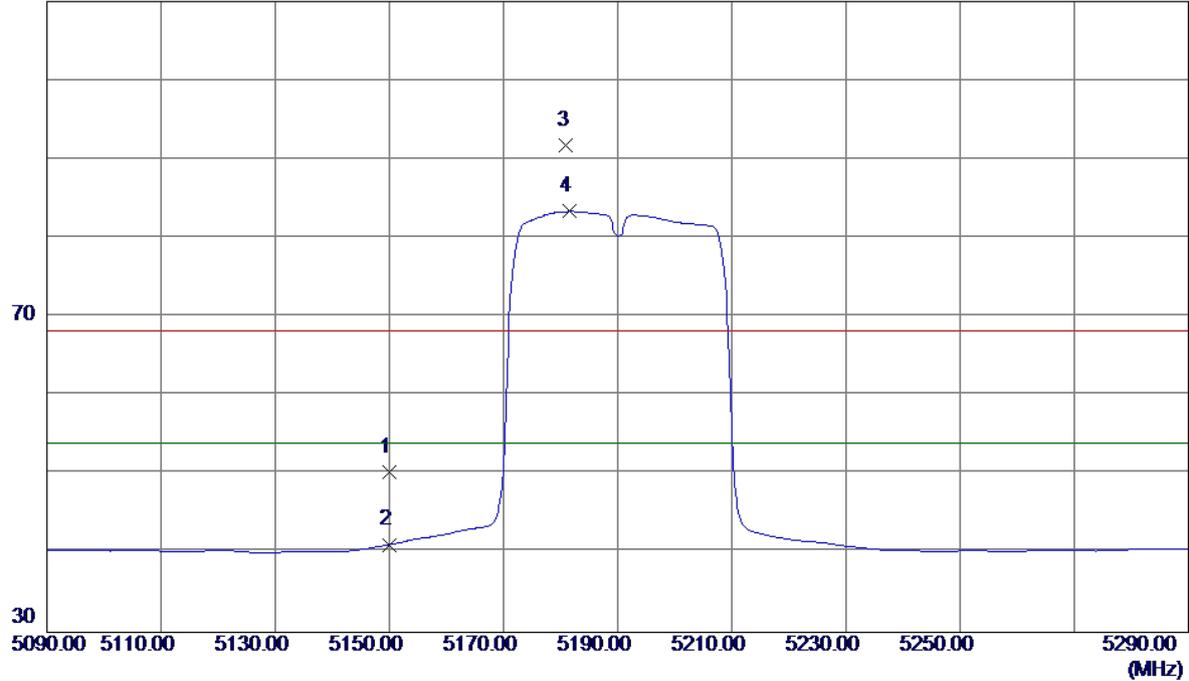

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	9.73	40.62	50.35	68.30	-17.95	Peak	
2	5150.0000	0.50	40.62	41.12	54.00	-12.88	AVG	
3	5181.0000	50.98	40.73	91.71	68.30	23.41	Peak	No Limit
4 *	5181.6000	42.65	40.73	83.38	54.00	29.38	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

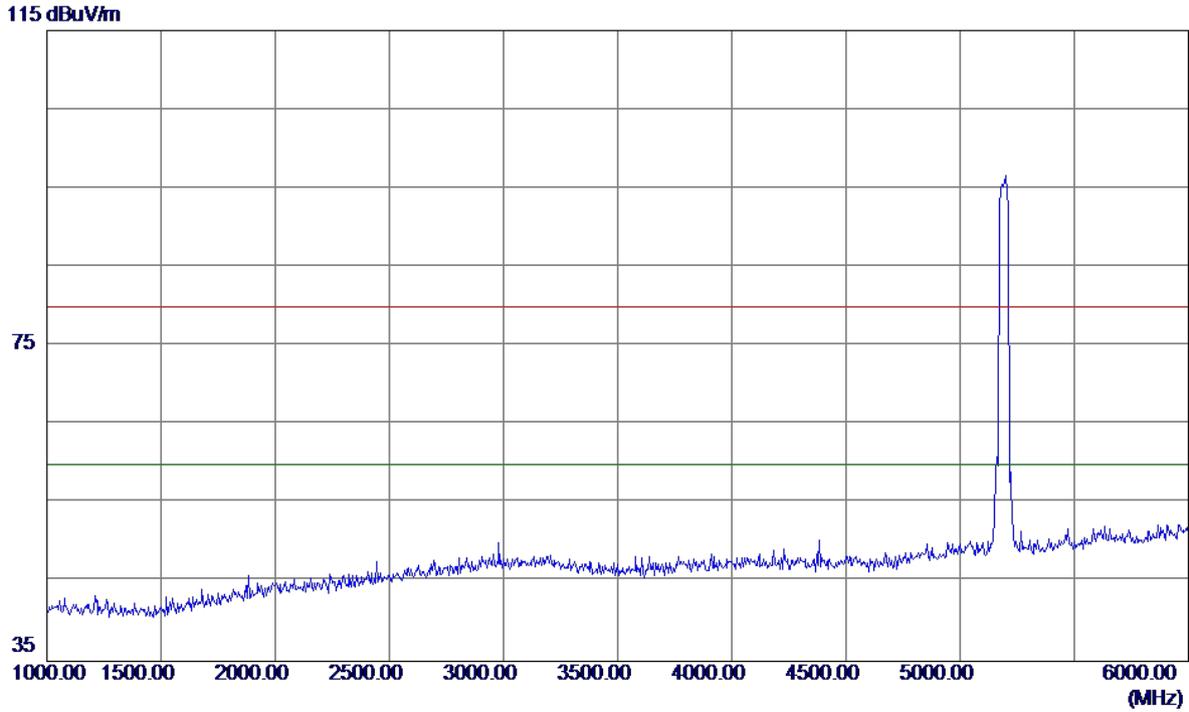

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

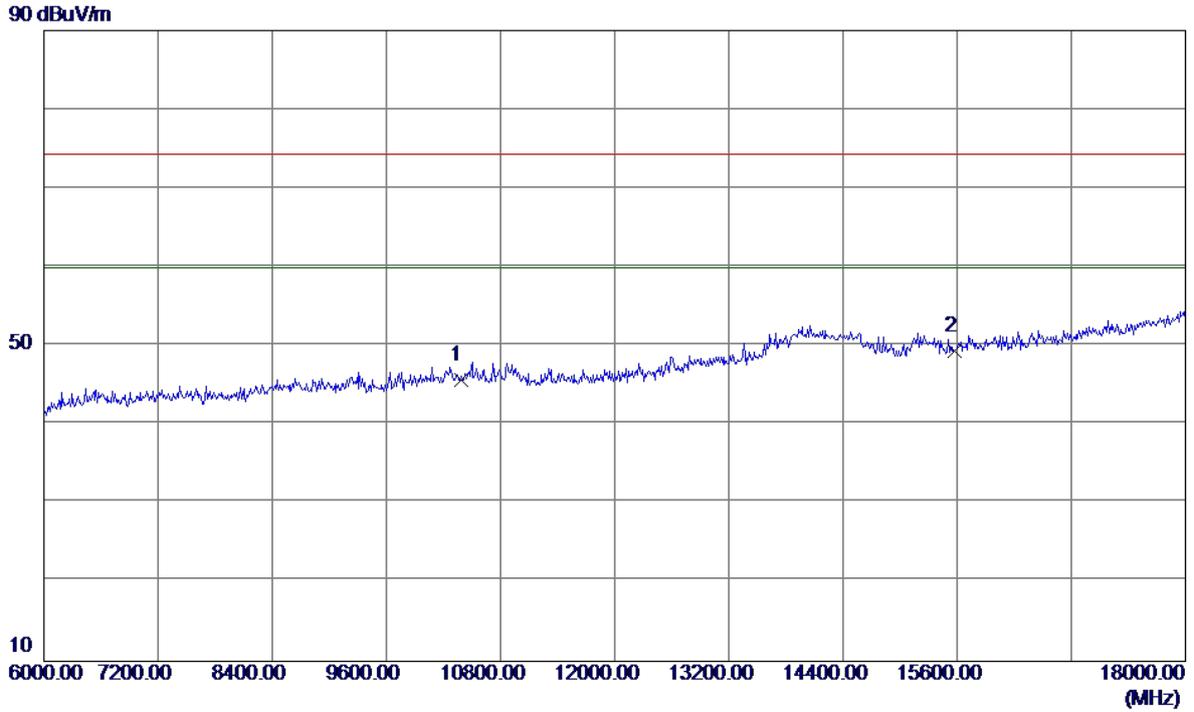


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10380.0000	30.64	15.01	45.65	74.30	-28.65	Peak	
2 *	15570.0000	31.54	17.86	49.40	74.30	-24.90	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical


100 dBuV/m

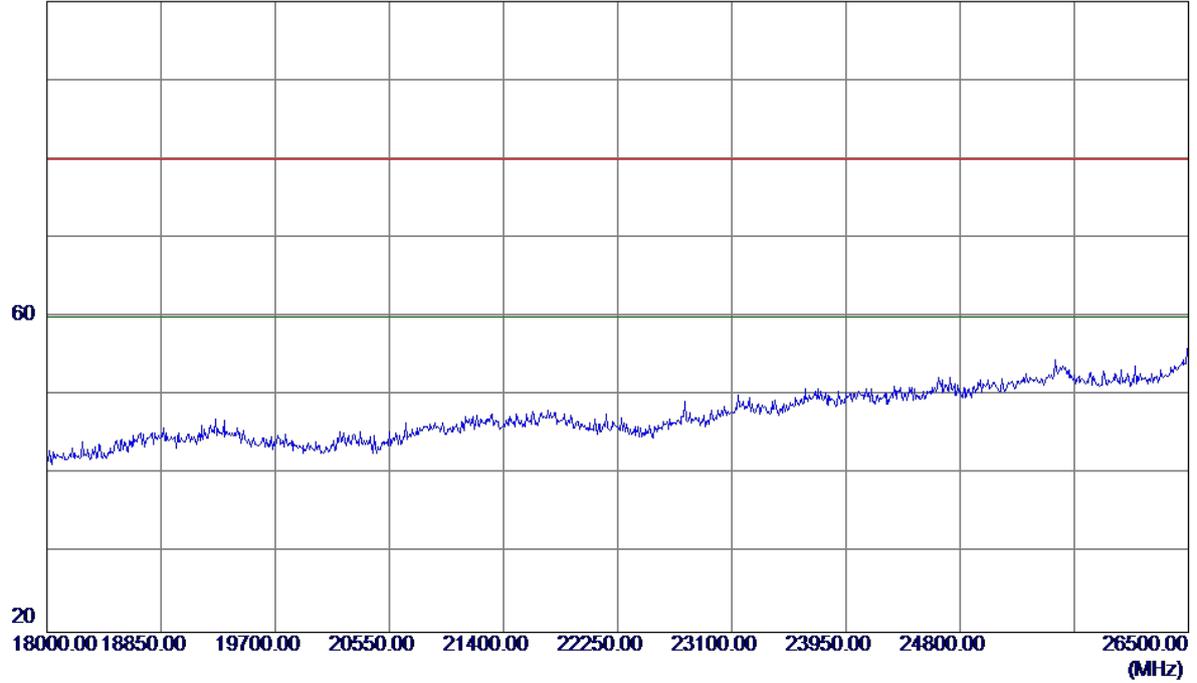

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

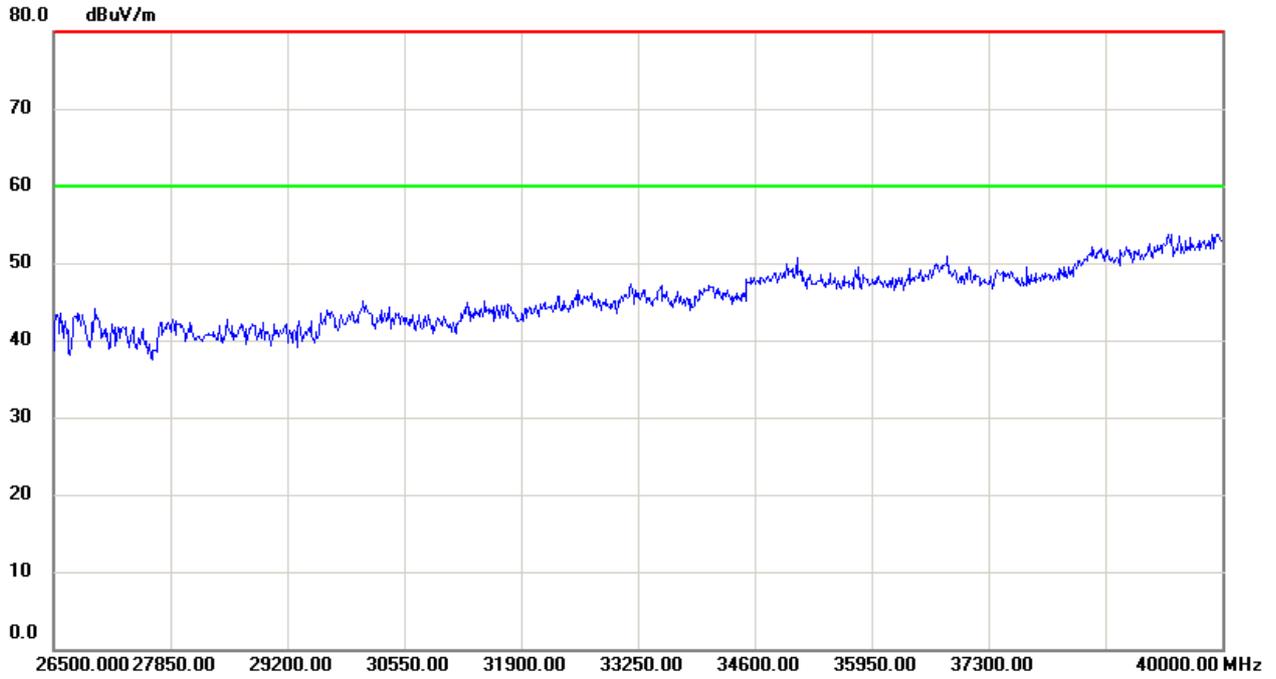


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal


110 dBuV/m

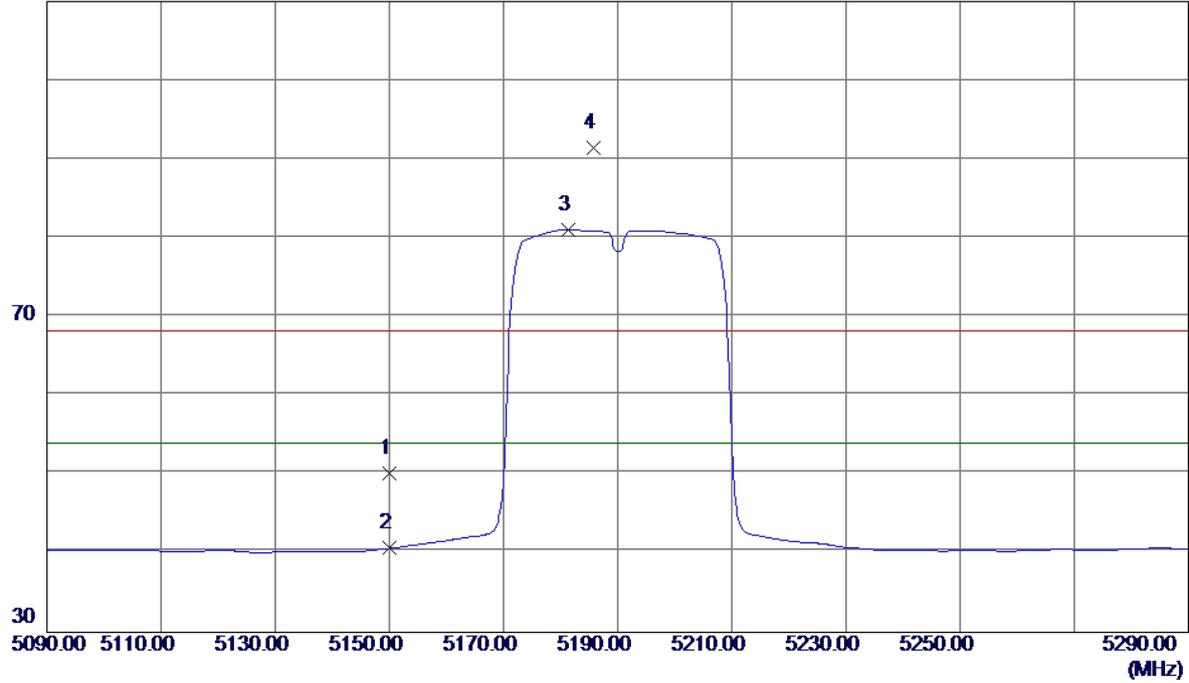

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	9.55	40.62	50.17	68.30	-18.13	Peak	
2	5150.0000	0.04	40.62	40.66	54.00	-13.34	AVG	
3 *	5181.4000	40.35	40.73	81.08	54.00	27.08	AVG	No Limit
4	5185.8000	50.63	40.74	91.37	68.30	23.07	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

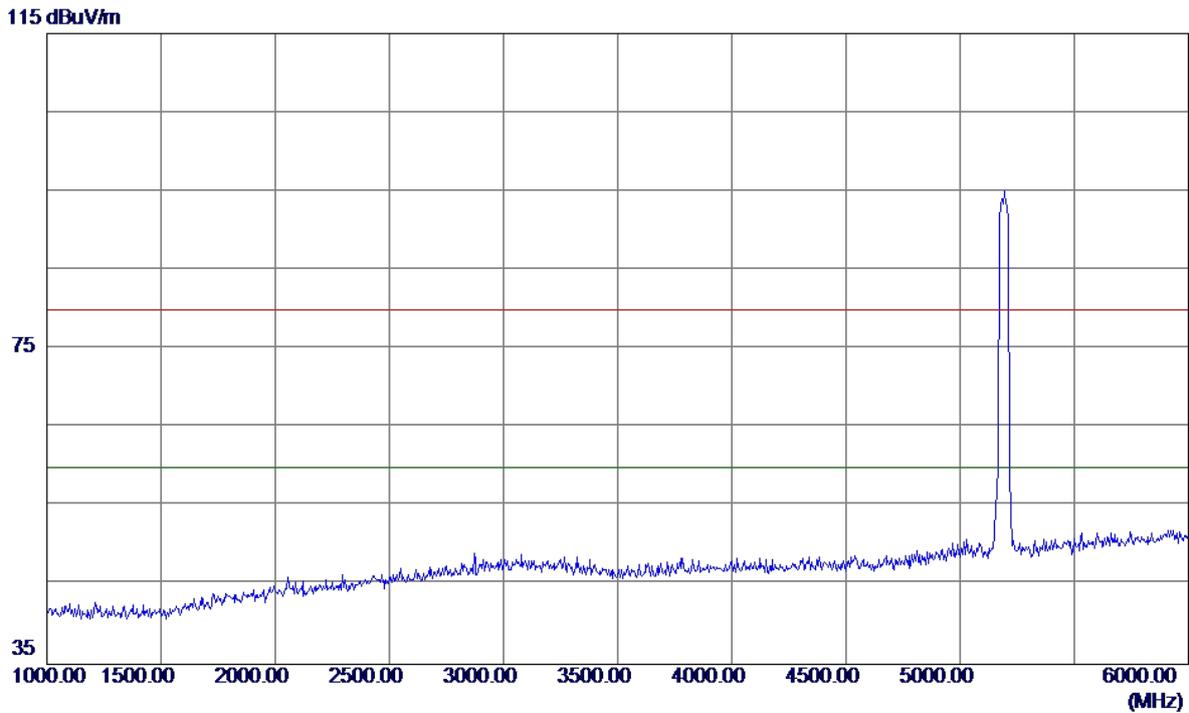

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

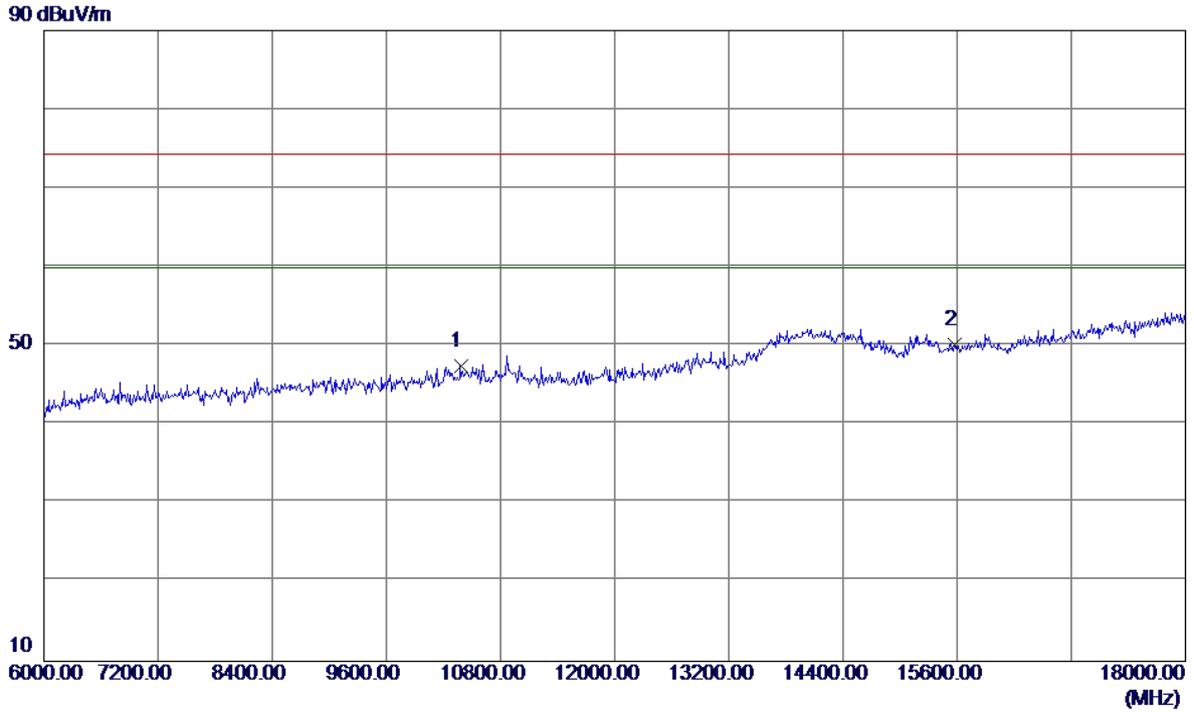

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10380.0000	32.46	15.01	47.47	74.30	-26.83	Peak	
2 *	15570.0000	32.23	17.86	50.09	74.30	-24.21	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

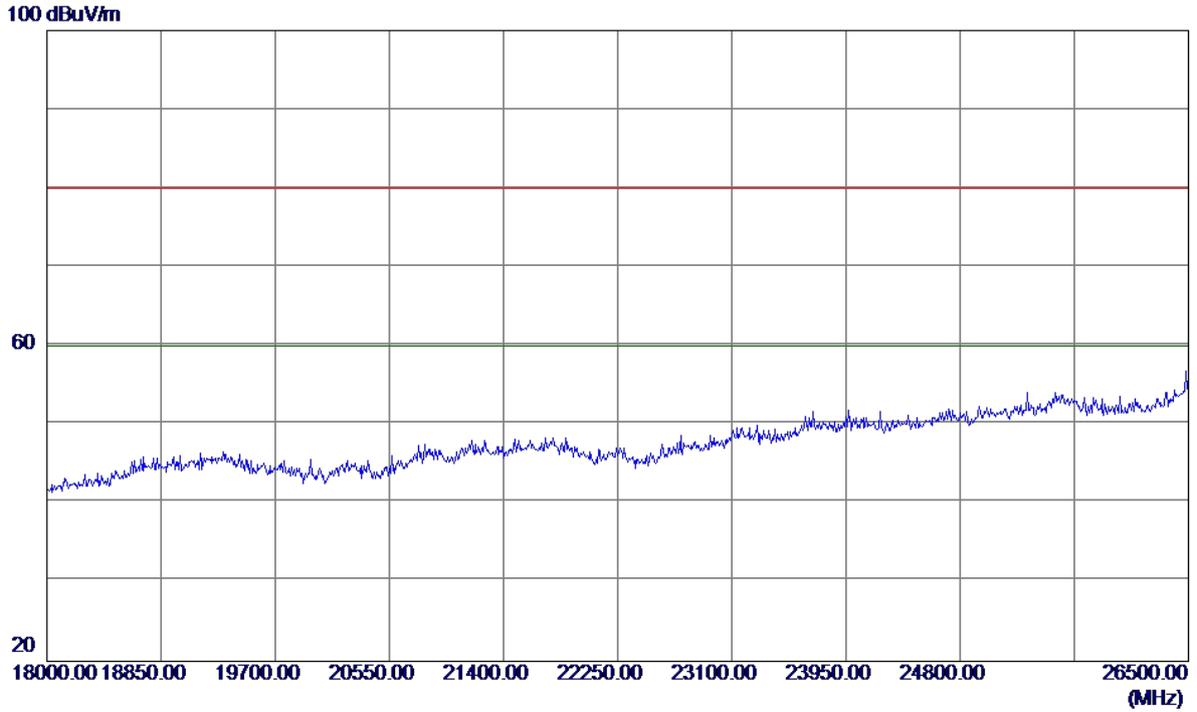

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

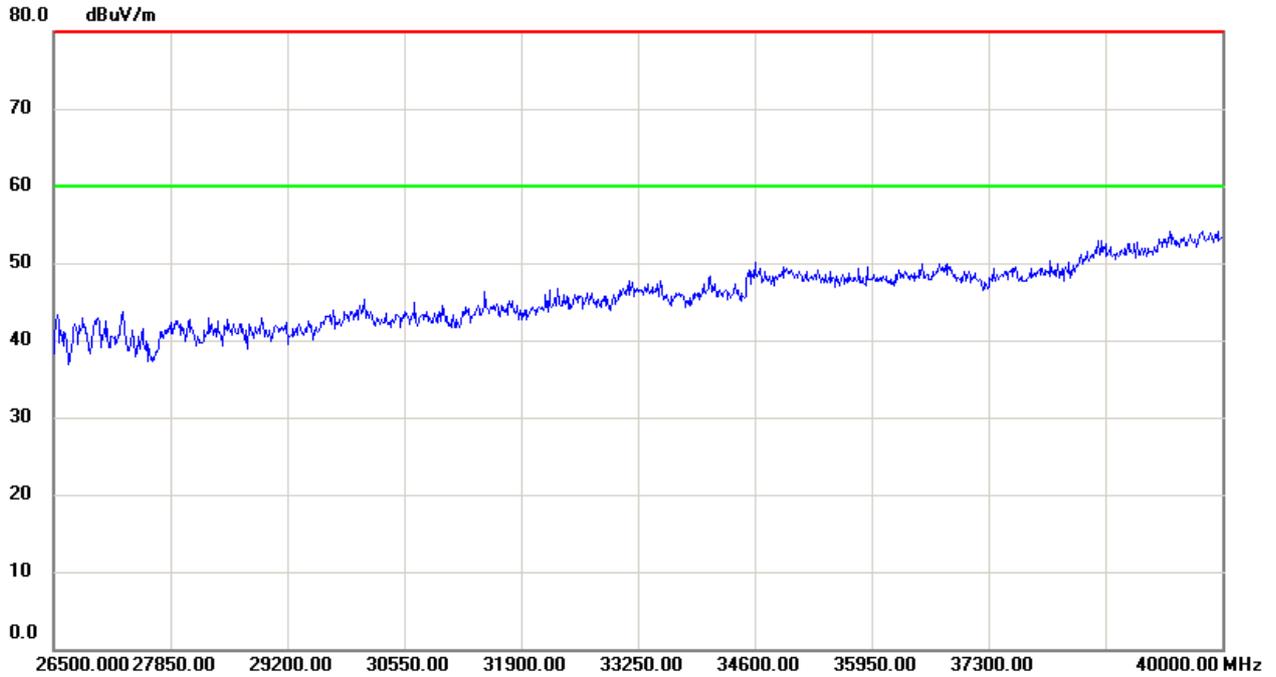


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical


110 dBuV/m

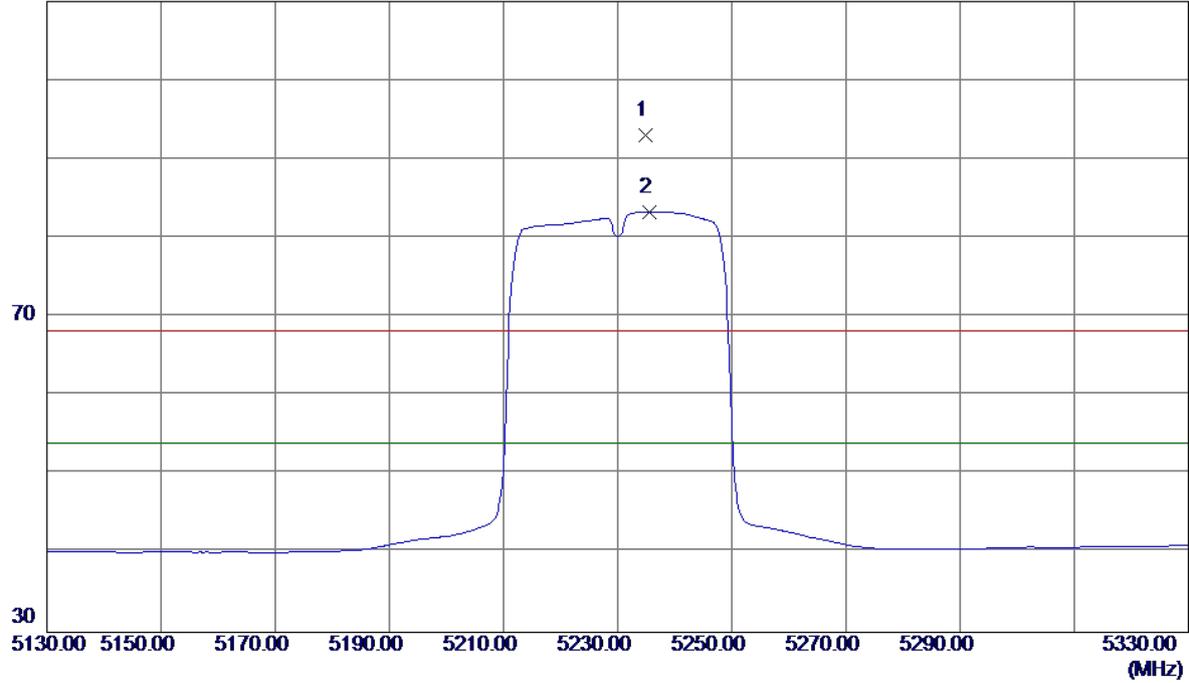

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5234.8000	52.18	40.90	93.08	68.30	24.78	Peak	No Limit
2 *	5235.6000	42.37	40.91	83.28	54.00	29.28	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

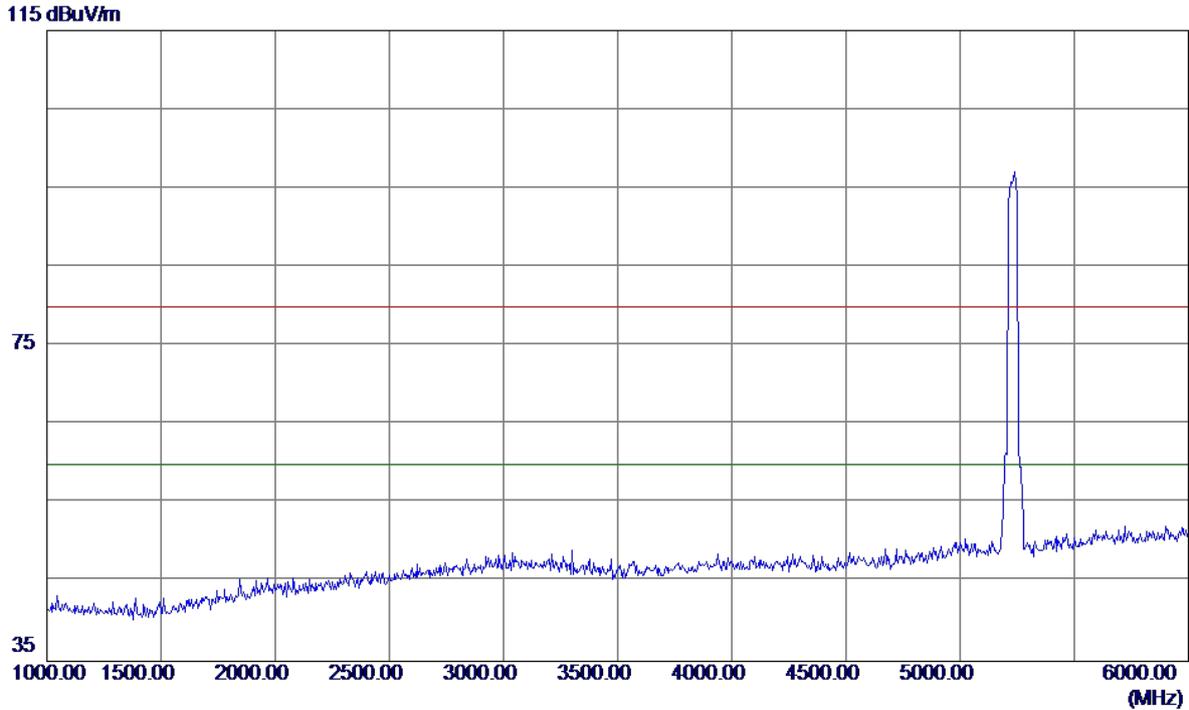

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

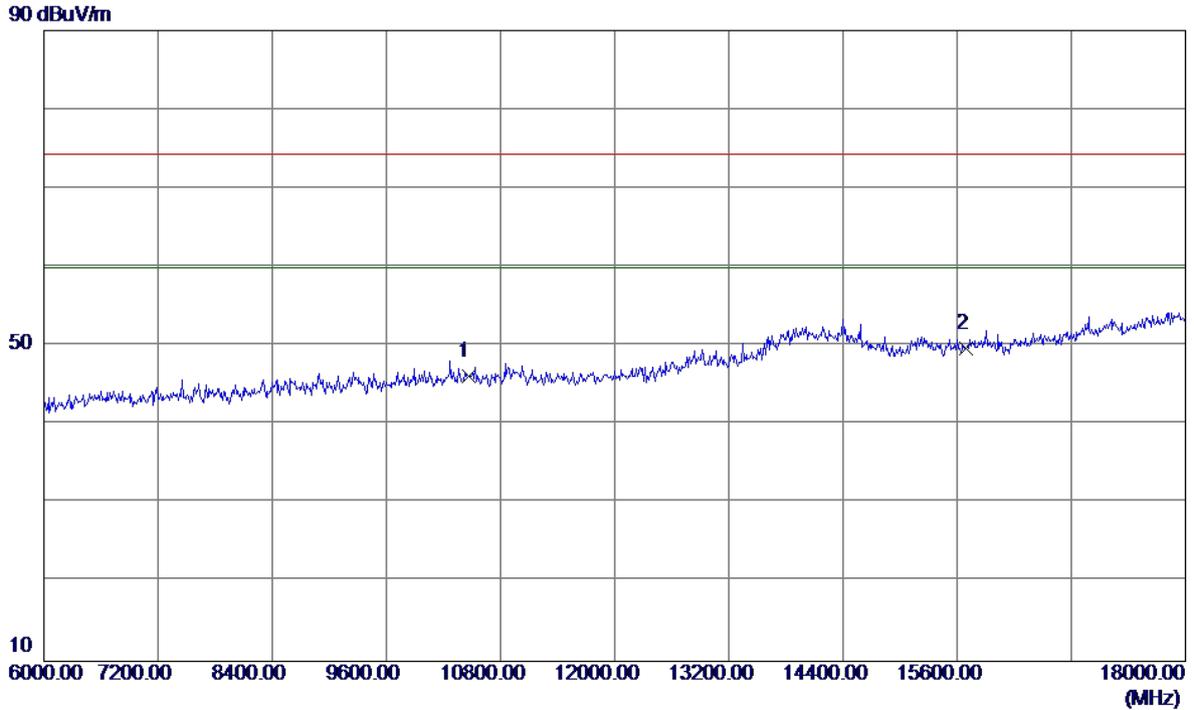


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10460.0000	30.99	15.20	46.19	74.30	-28.11	Peak	
2 *	15690.0000	31.90	17.86	49.76	74.30	-24.54	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

100 dBuV/m

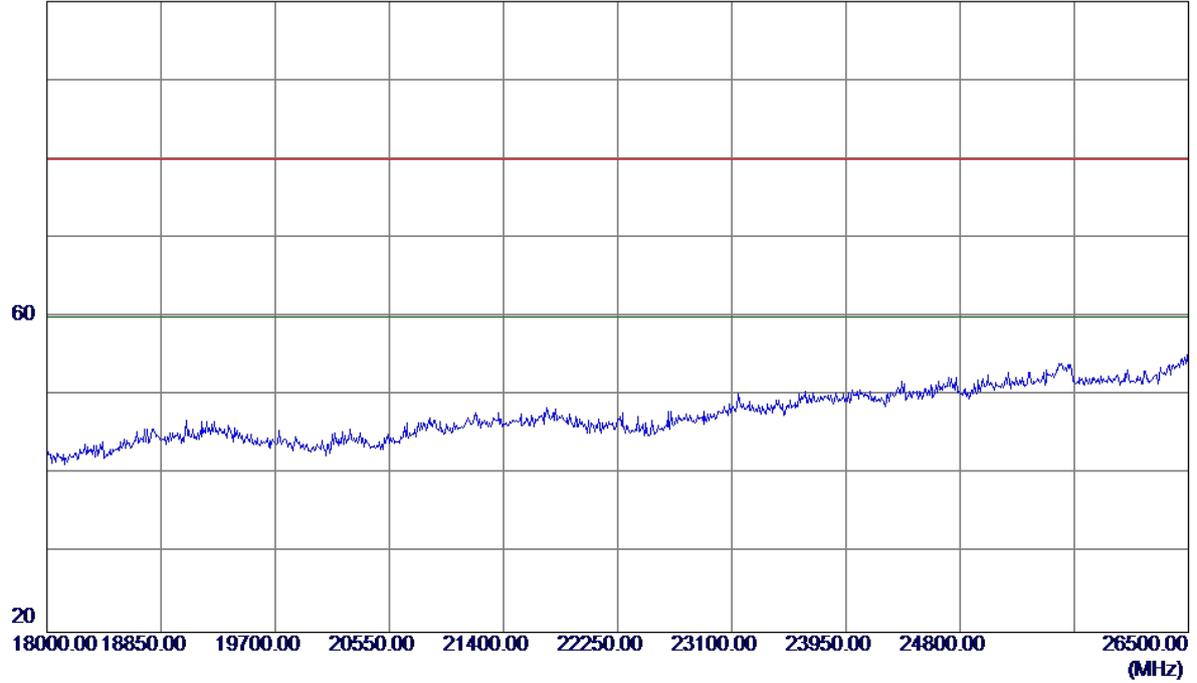

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

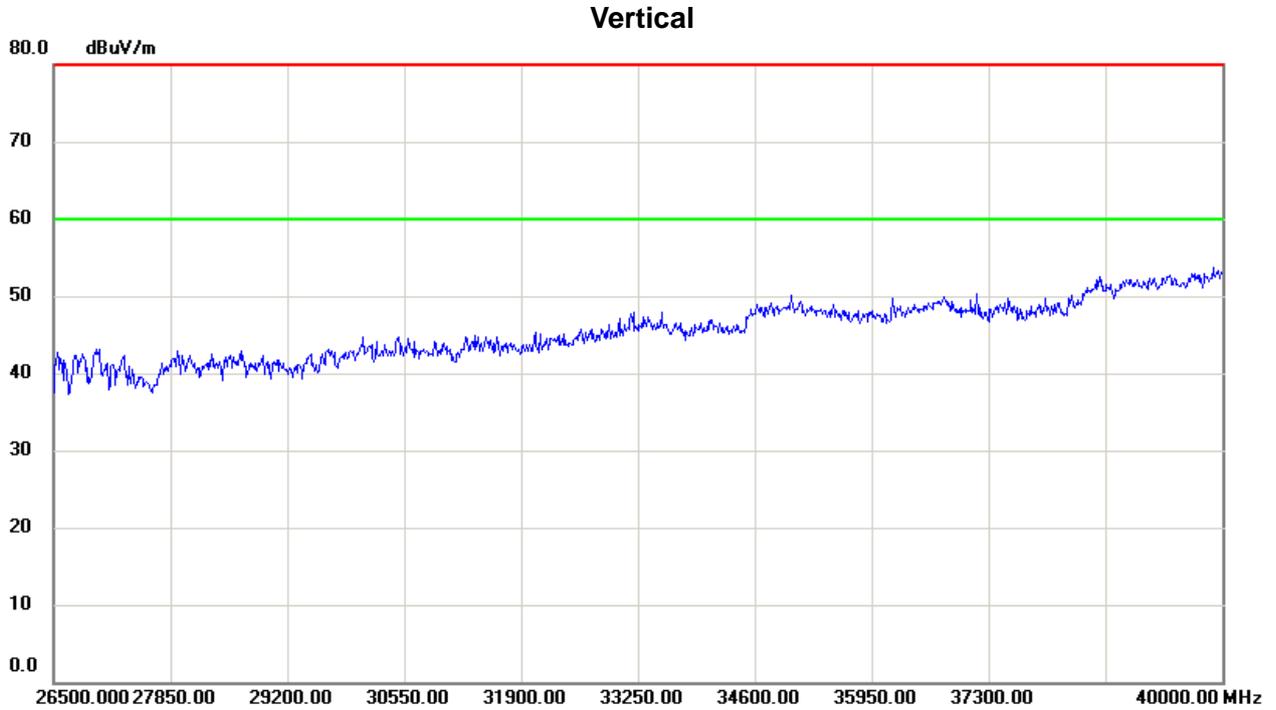

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

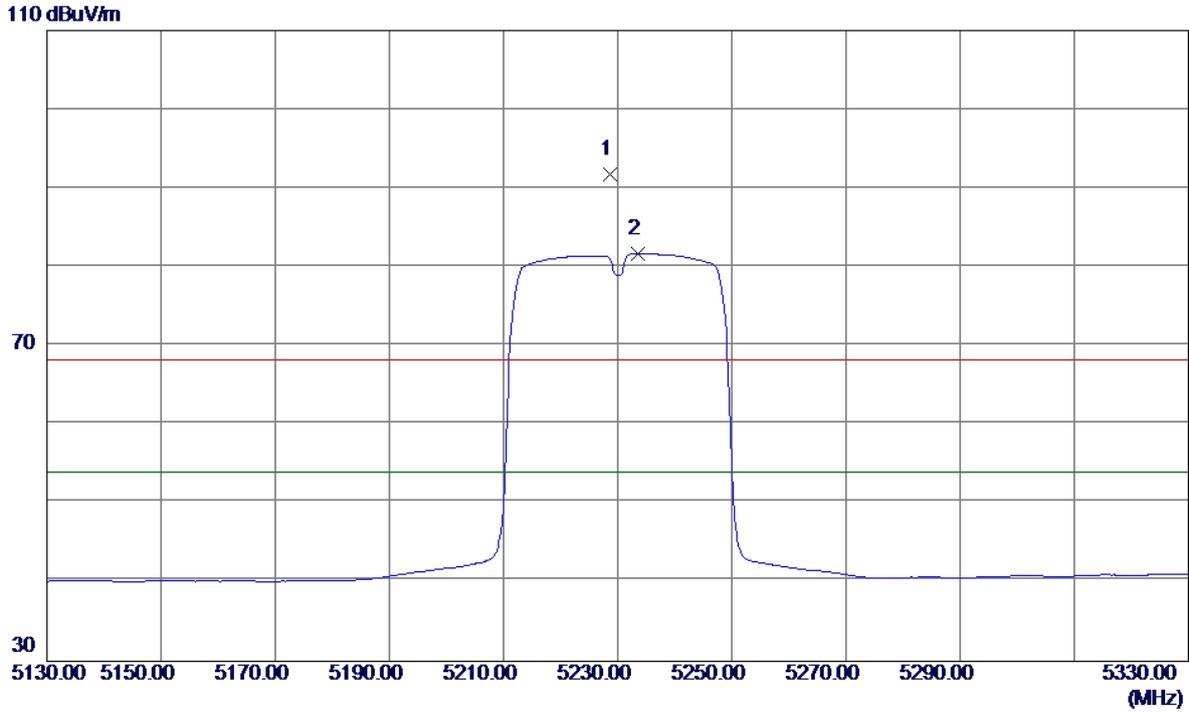


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5228.6000	50.82	40.88	91.70	68.30	23.40	Peak	No Limit
2 *	5233.6000	40.83	40.90	81.73	54.00	27.73	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal


115 dBuV/m

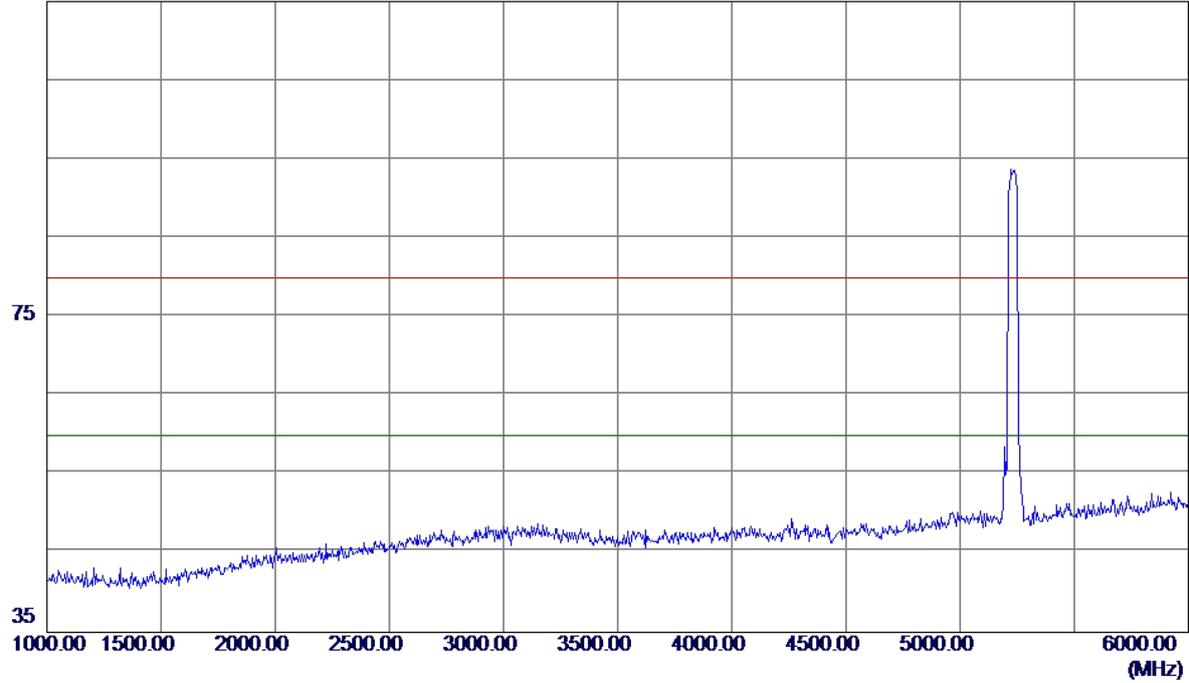

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

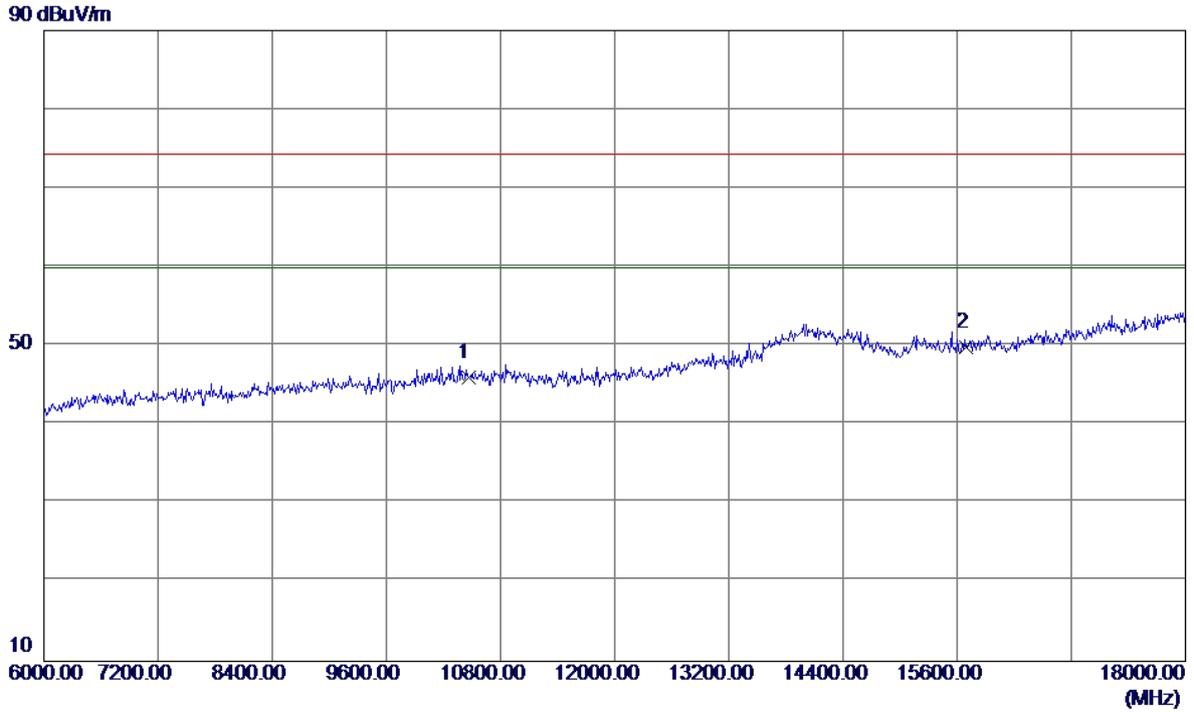

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10460.0000	30.84	15.20	46.04	74.30	-28.26	Peak	
2 *	15690.0000	31.92	17.86	49.78	74.30	-24.52	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

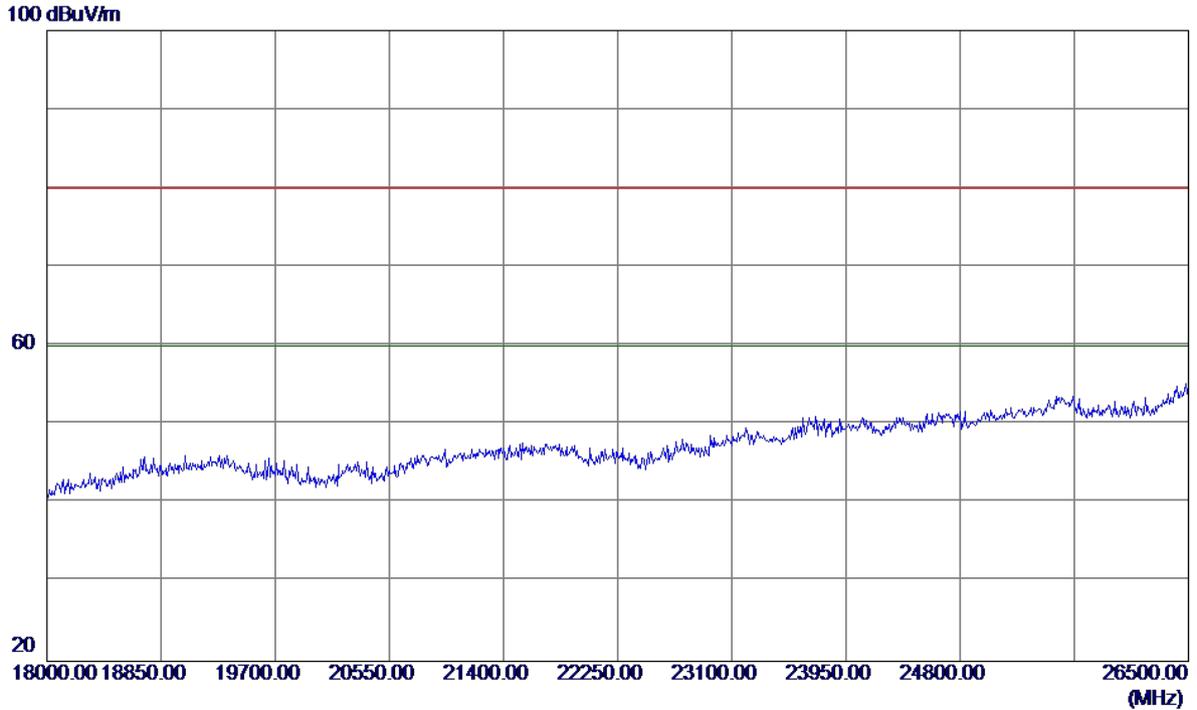

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

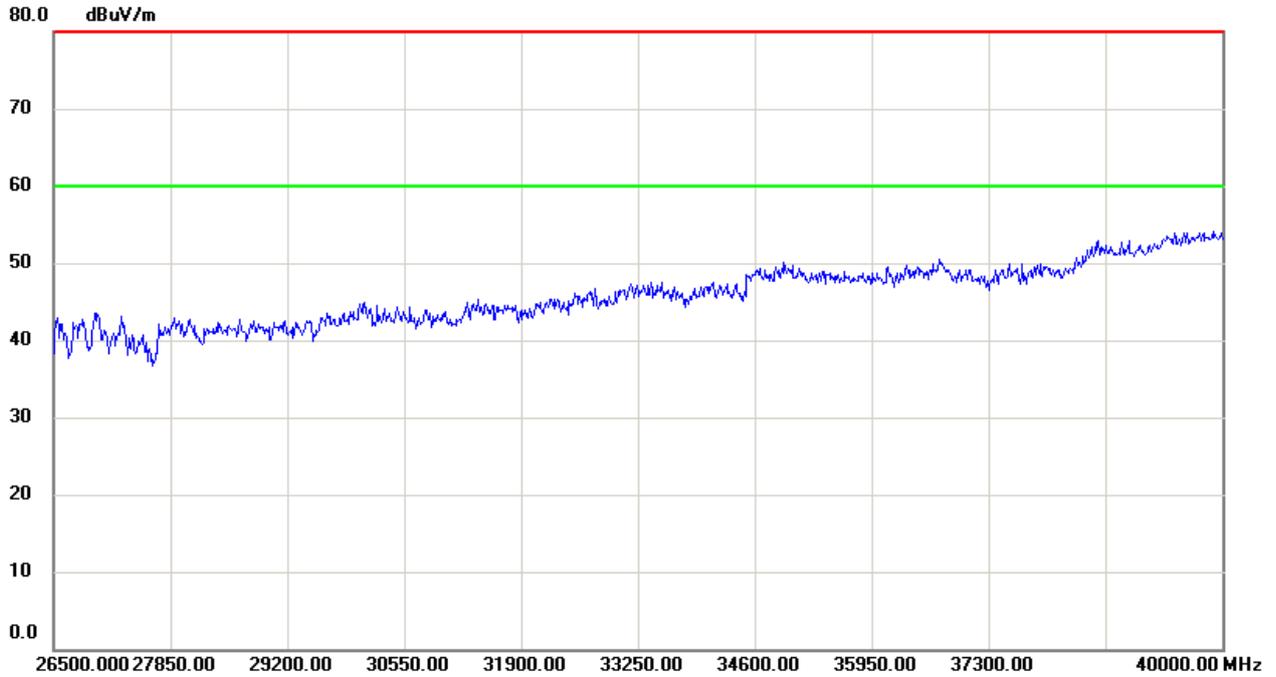

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

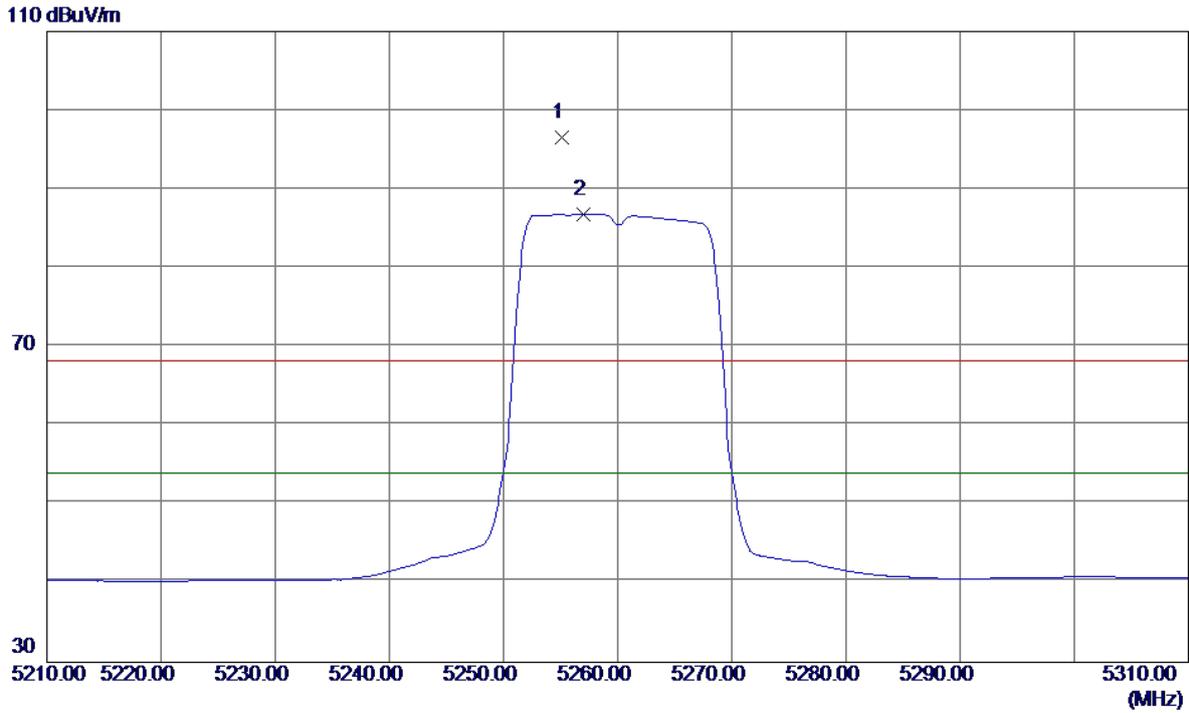


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5255.1000	55.51	40.97	96.48	68.30	28.18	Peak	No Limit
2 *	5257.0000	45.79	40.98	86.77	54.00	32.77	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical


115 dBuV/m

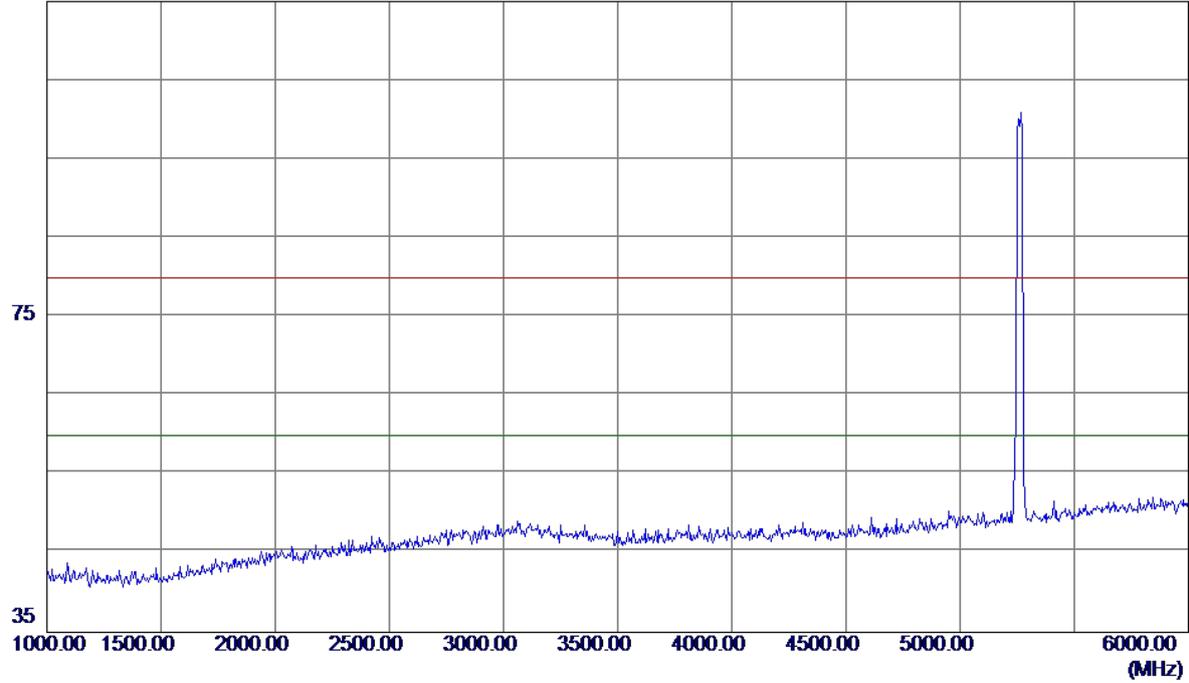

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

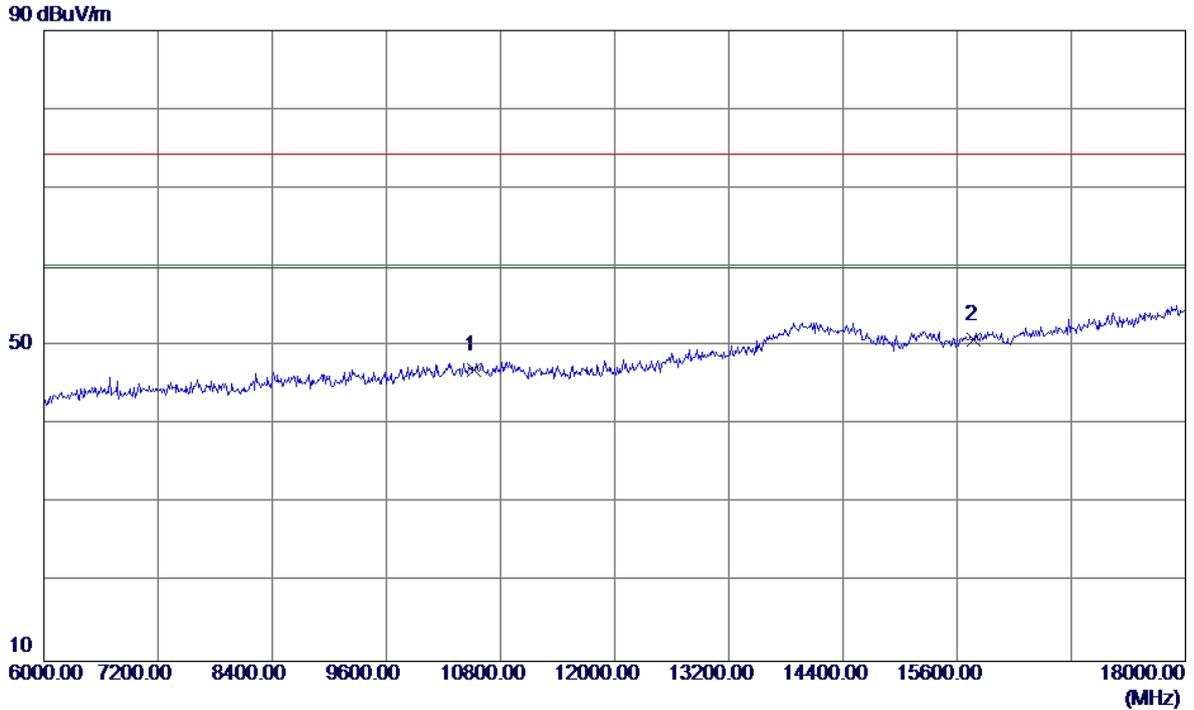

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10520.0000	31.70	15.32	47.02	74.30	-27.28	Peak	
2 *	15780.0000	32.97	17.86	50.83	74.30	-23.47	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical


100 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Vertical

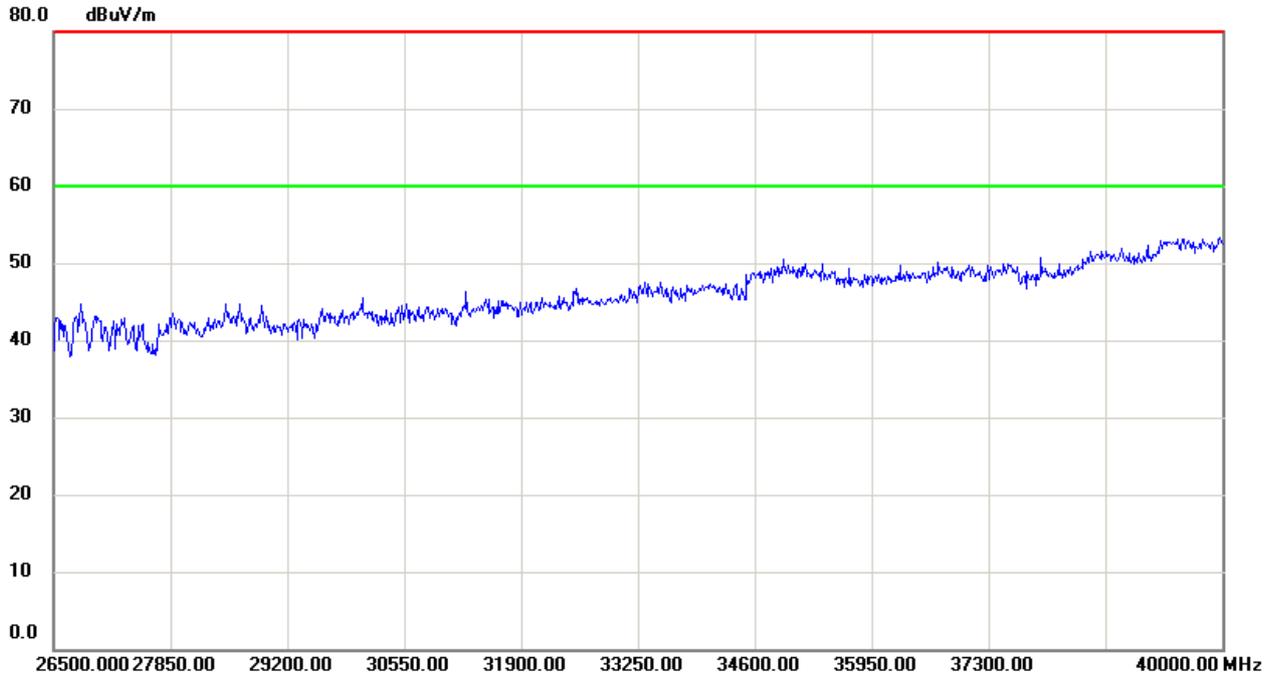

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
	26500.000							
	27850.00							
	29200.00							
	30550.00							
	31900.00							
	33250.00							
	34600.00							
	35950.00							
	37300.00							
	40000.00							

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

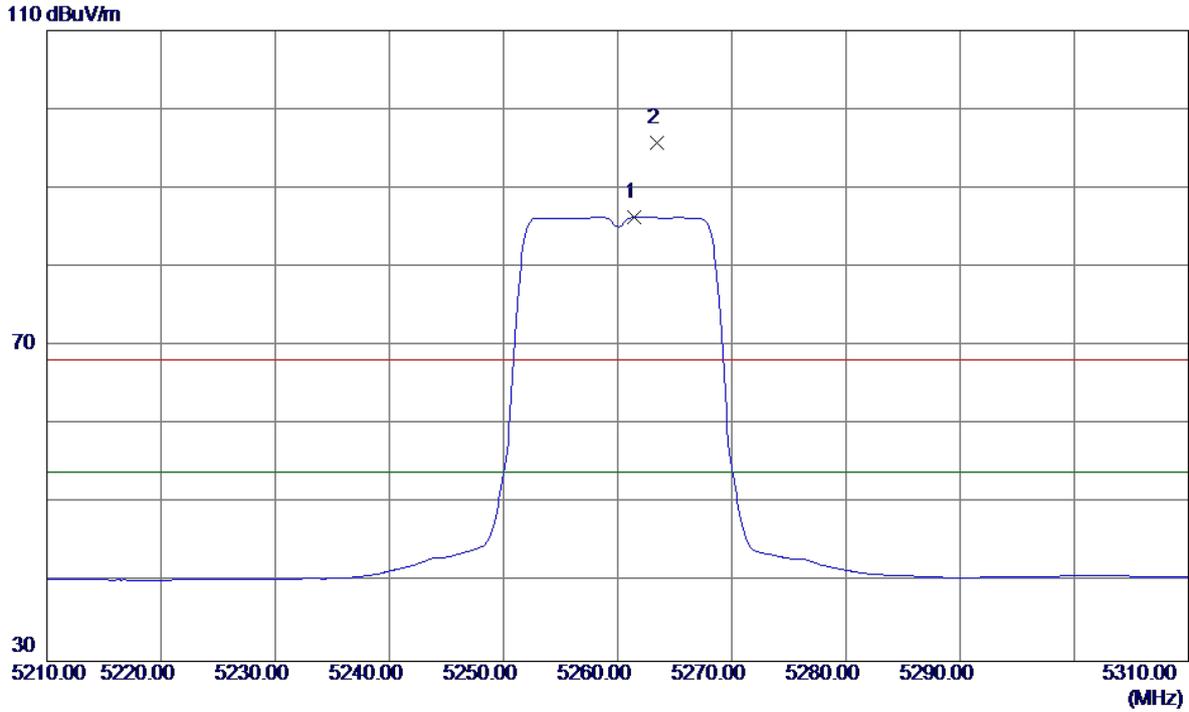


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5261.4000	45.30	40.99	86.29	54.00	32.29	AVG	No Limit
2	5263.4000	54.79	41.00	95.79	68.30	27.49	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal


115 dBuV/m

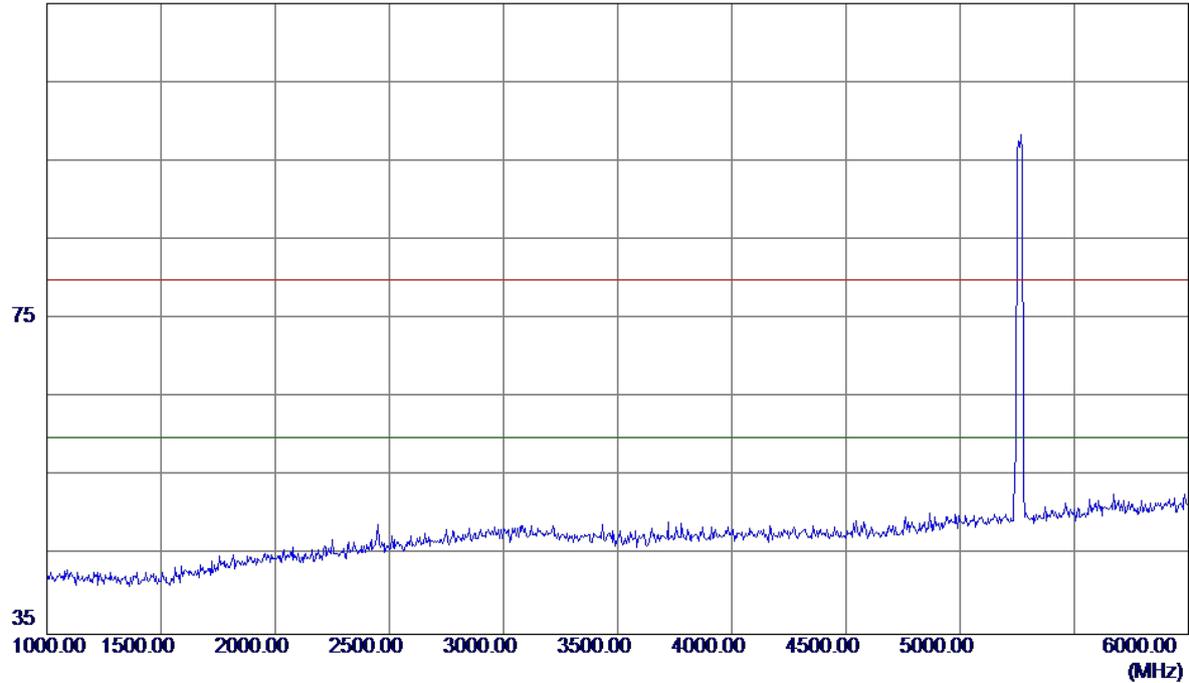

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Horizontal

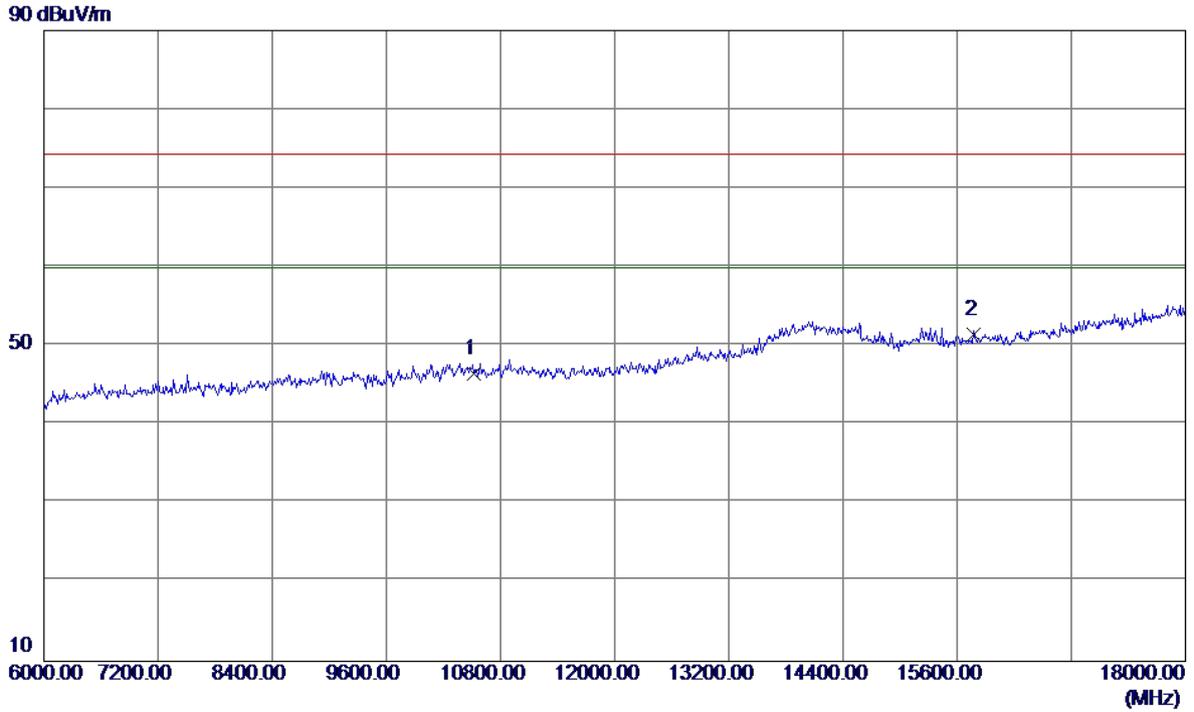

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10520.0000	31.23	15.32	46.55	74.30	-27.75	Peak	
2 *	15780.0000	33.59	17.86	51.45	74.30	-22.85	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Horizontal

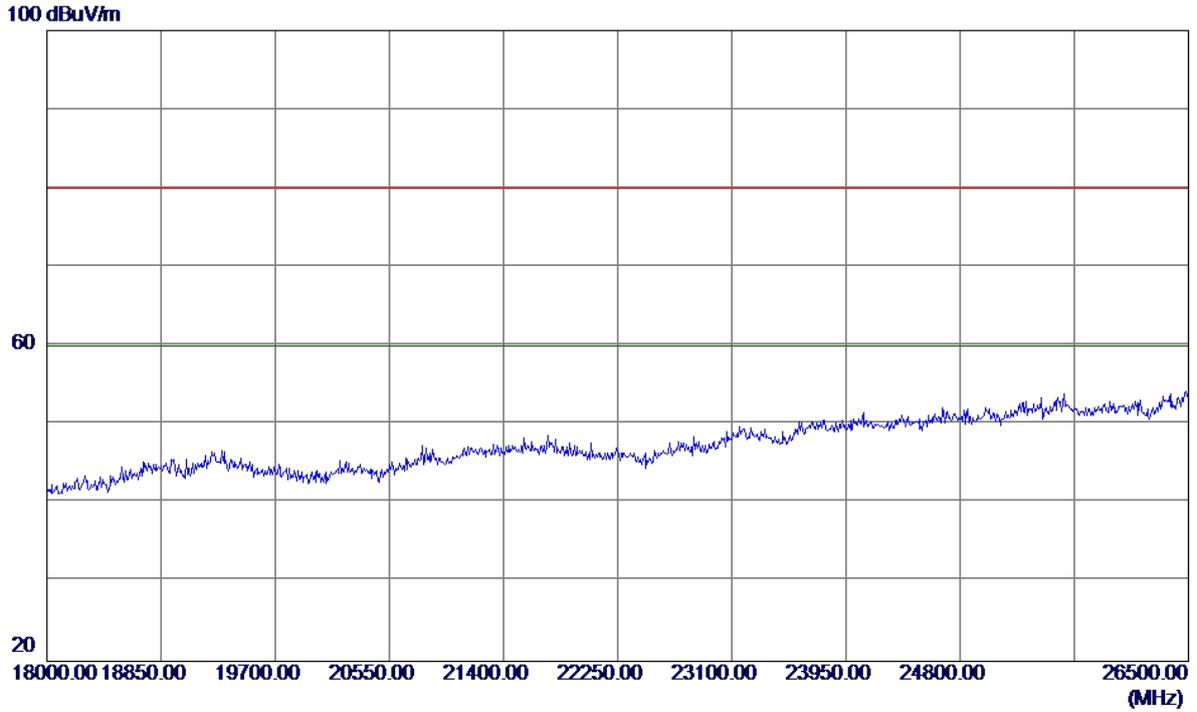

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

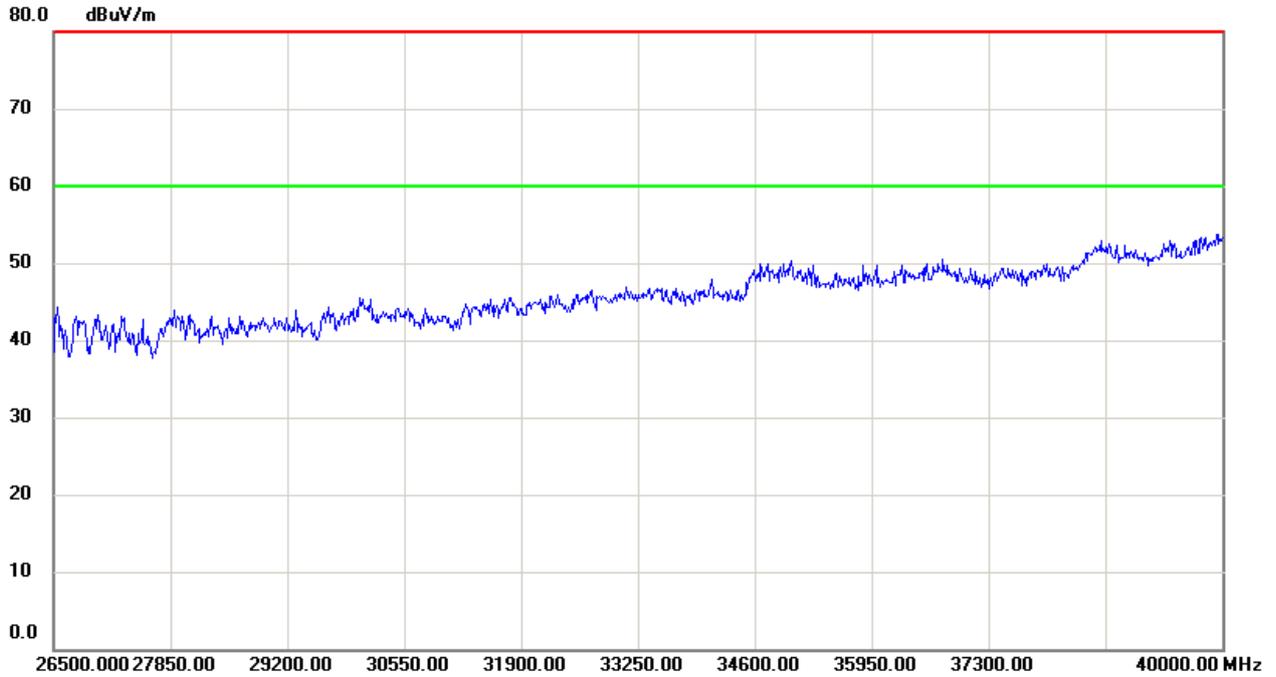


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical


110 dBuV/m

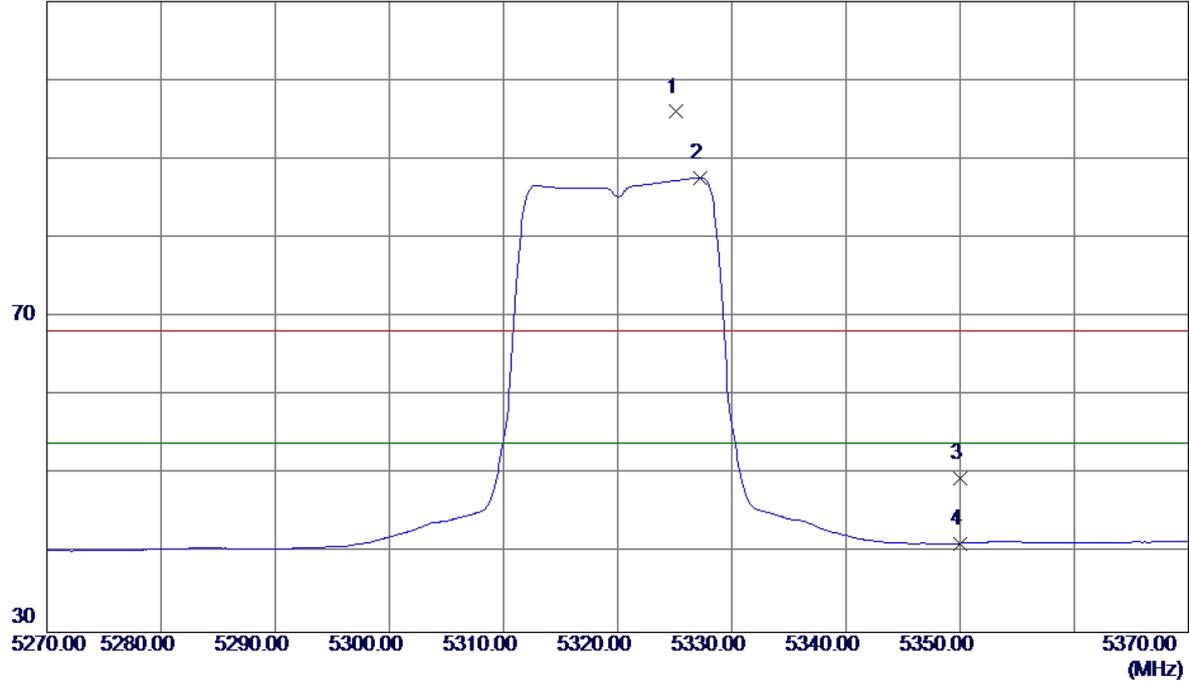

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5325.1000	54.80	41.20	96.00	68.30	27.70	Peak	No Limit
2 *	5327.2000	46.42	41.21	87.63	54.00	33.63	AVG	No Limit
3	5350.0000	8.17	41.28	49.45	68.30	-18.85	Peak	
4	5350.0000	-0.01	41.28	41.27	54.00	-12.73	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Vertical

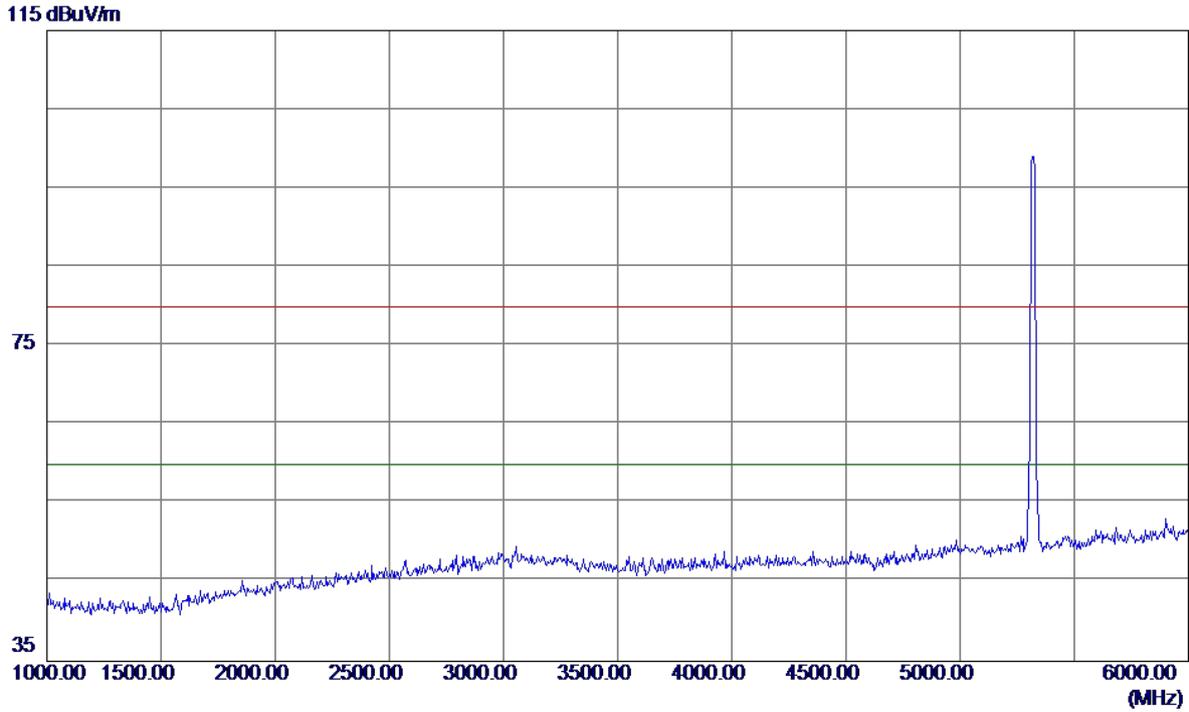

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

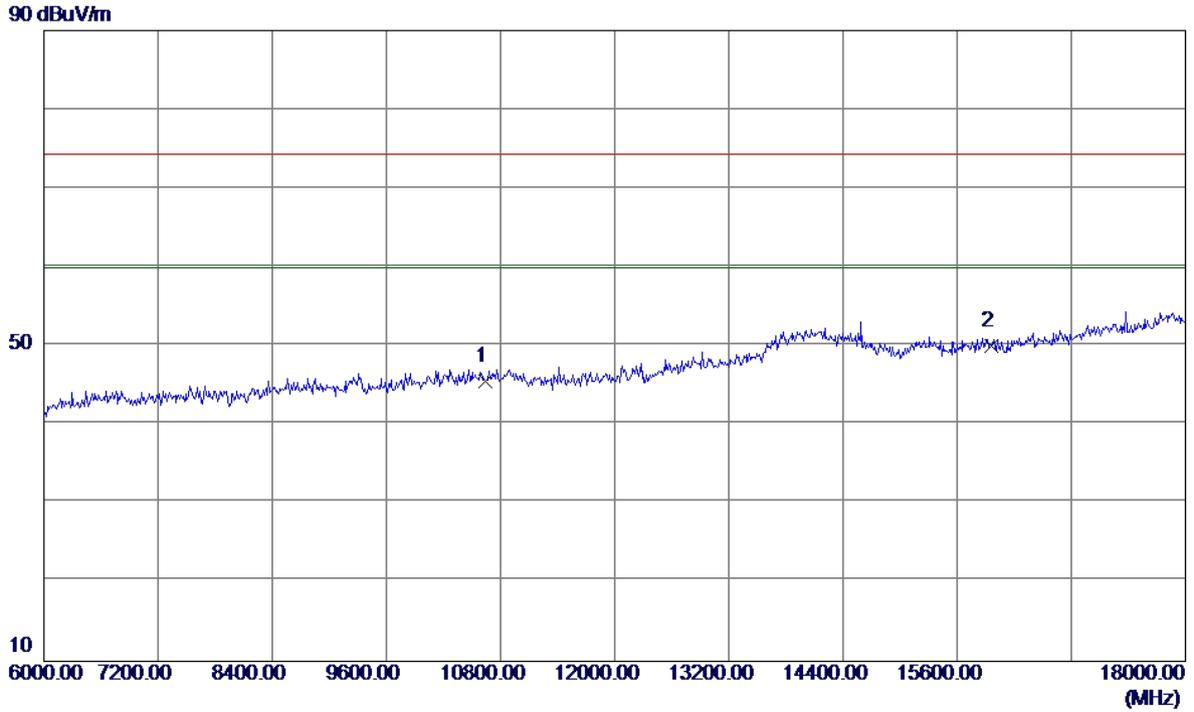


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	29.99	15.47	45.46	74.30	-28.84	Peak	
2 *	15960.0000	32.11	17.86	49.97	74.30	-24.33	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical


100 dBuV/m

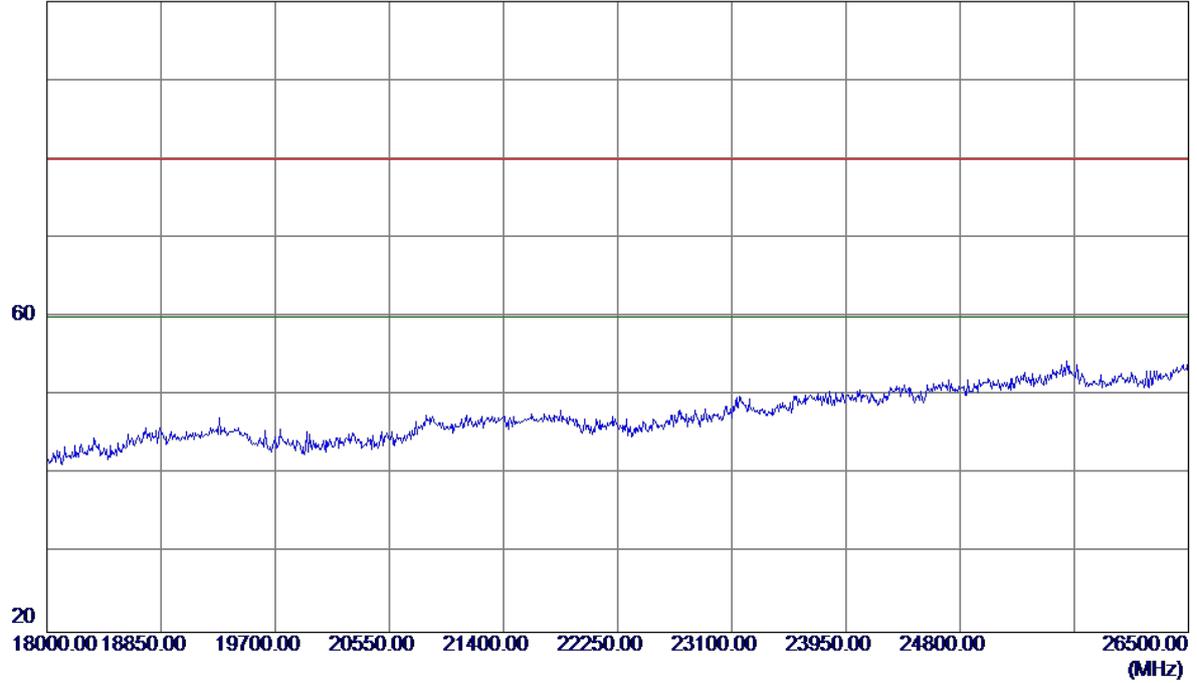

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Vertical

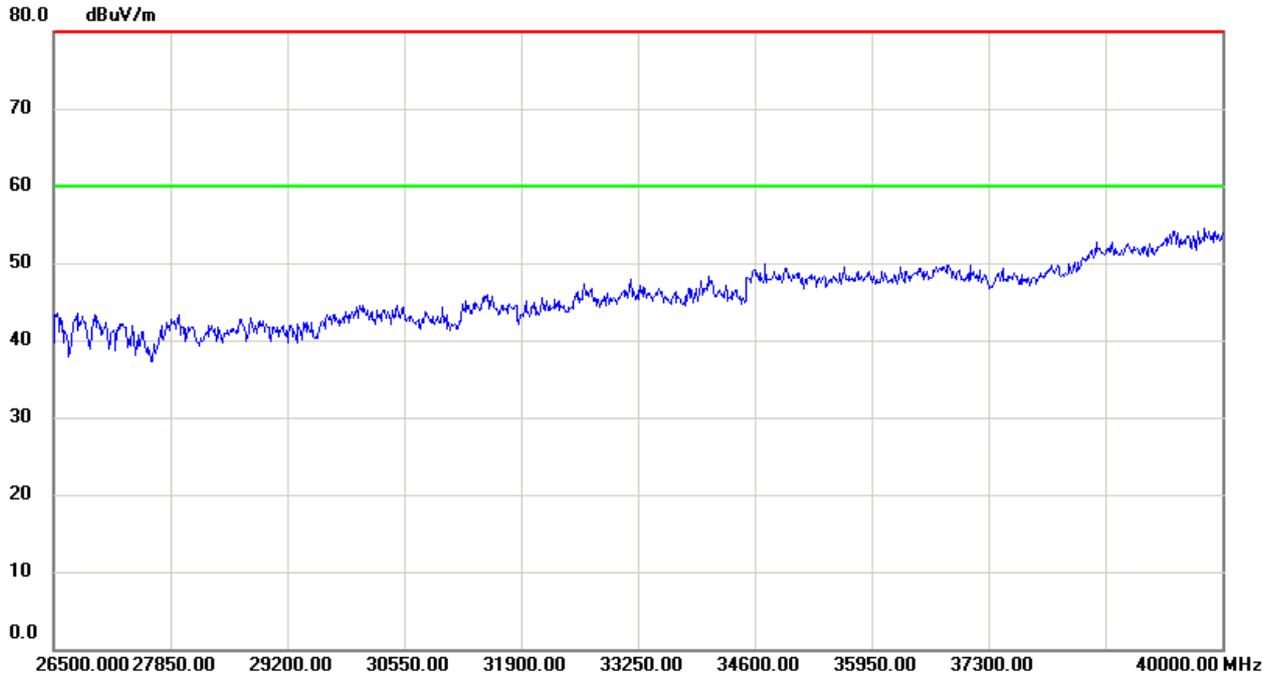

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Horizontal

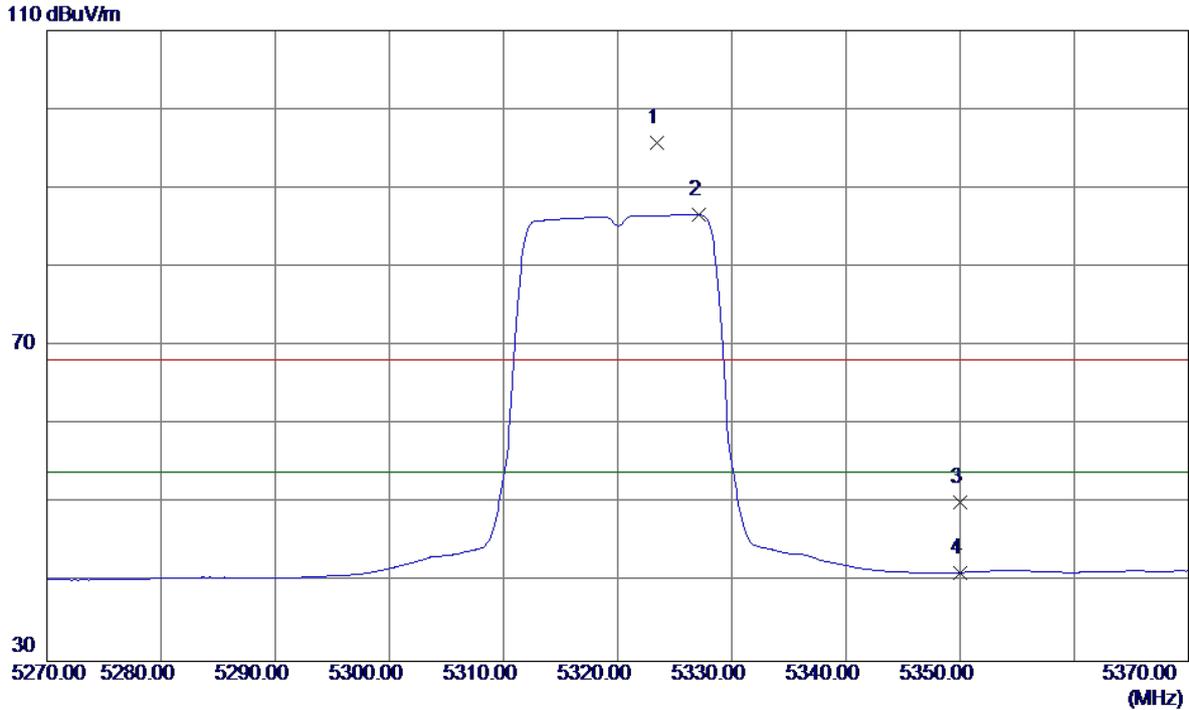

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5323.4000	54.50	41.20	95.70	68.30	27.40	Peak	No Limit
2 *	5327.1000	45.38	41.21	86.59	54.00	32.59	AVG	No Limit
3	5350.0000	8.87	41.28	50.15	68.30	-18.15	Peak	
4	5350.0000	-0.02	41.28	41.26	54.00	-12.74	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Horizontal

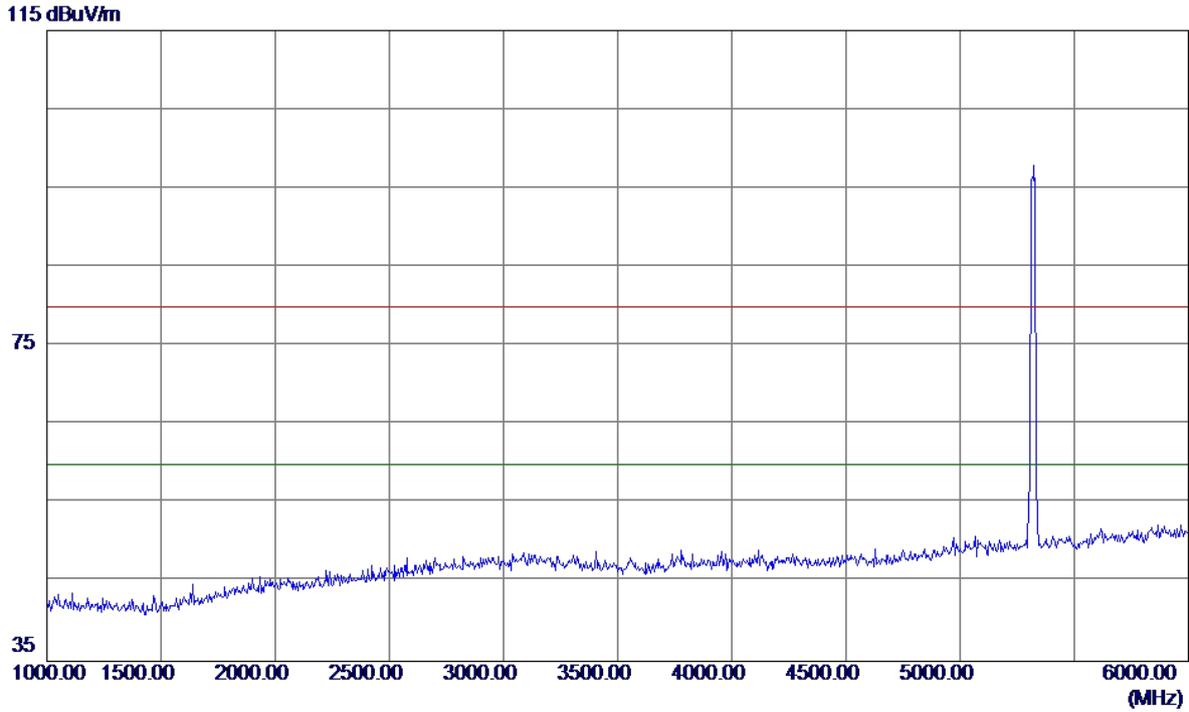

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Horizontal

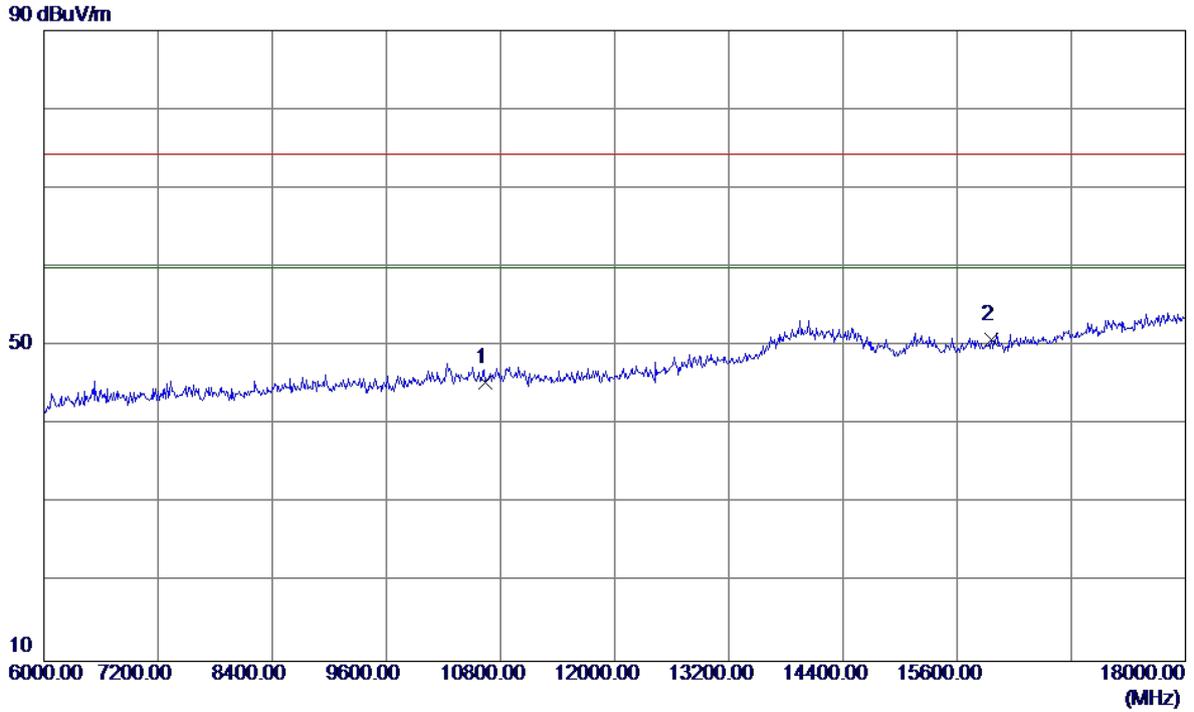

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	29.95	15.47	45.42	74.30	-28.88	Peak	
2 *	15960.0000	32.94	17.86	50.80	74.30	-23.50	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Horizontal

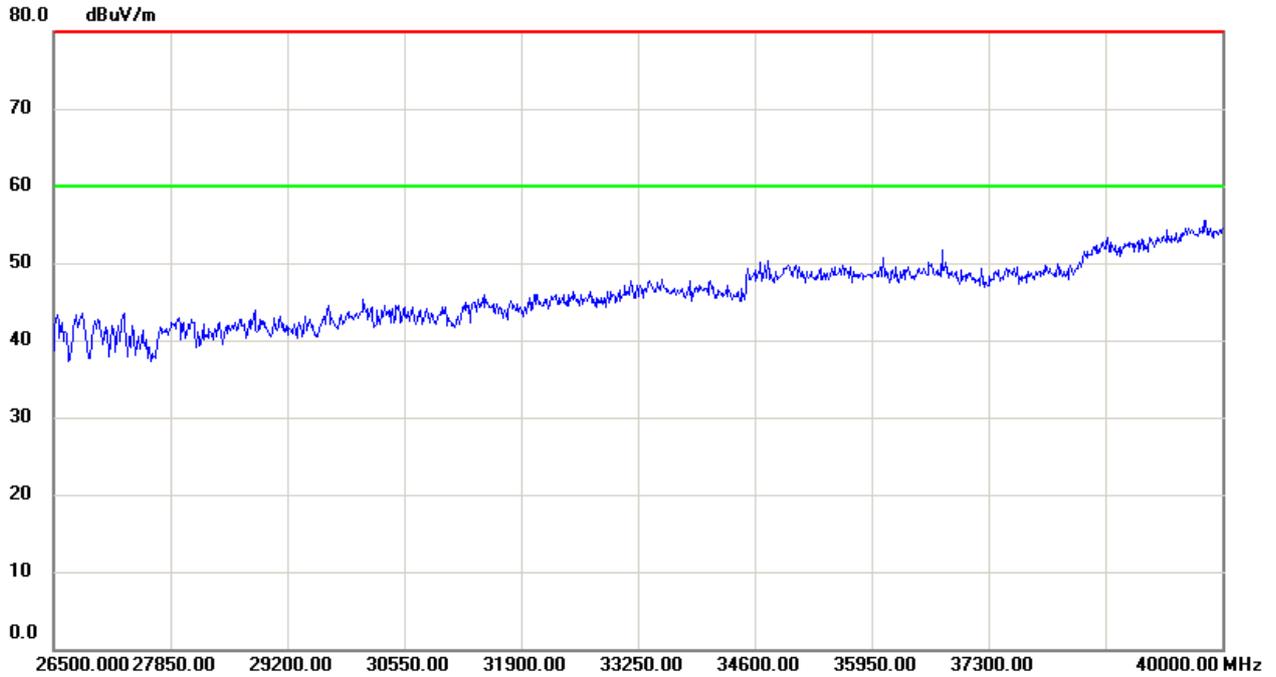

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Vertical

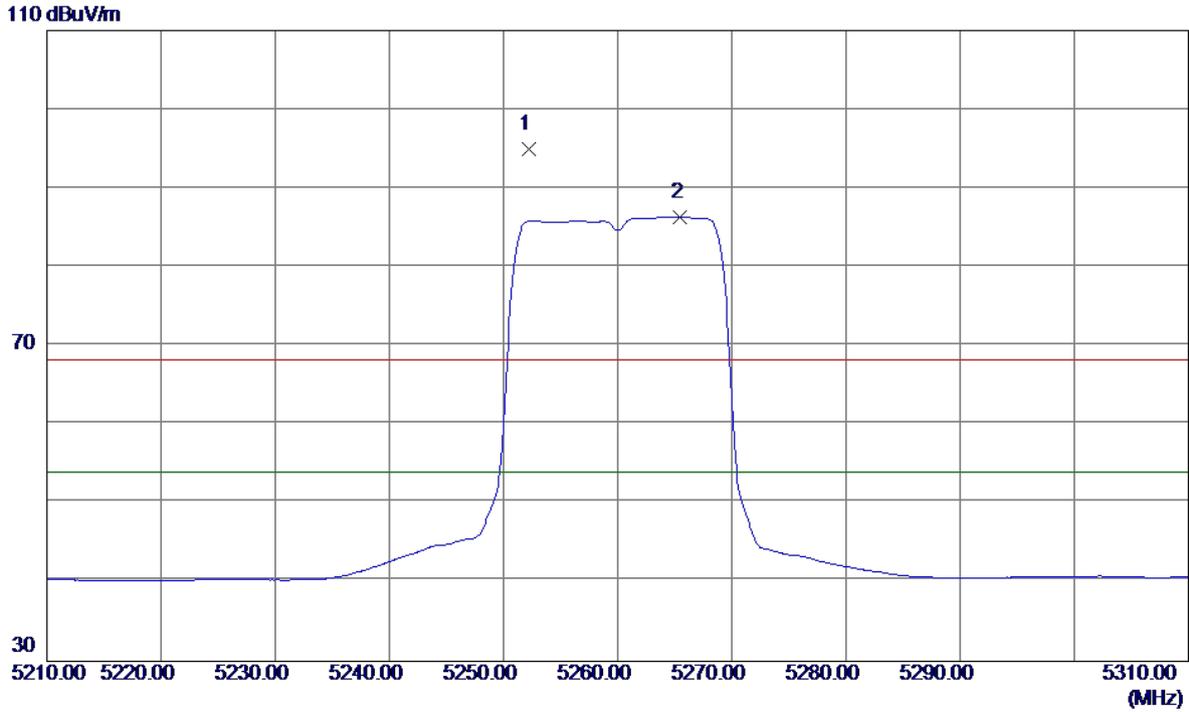

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5252.2000	54.05	40.96	95.01	68.30	26.71	Peak	No Limit
2 *	5265.5000	45.27	41.01	86.28	54.00	32.28	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Vertical

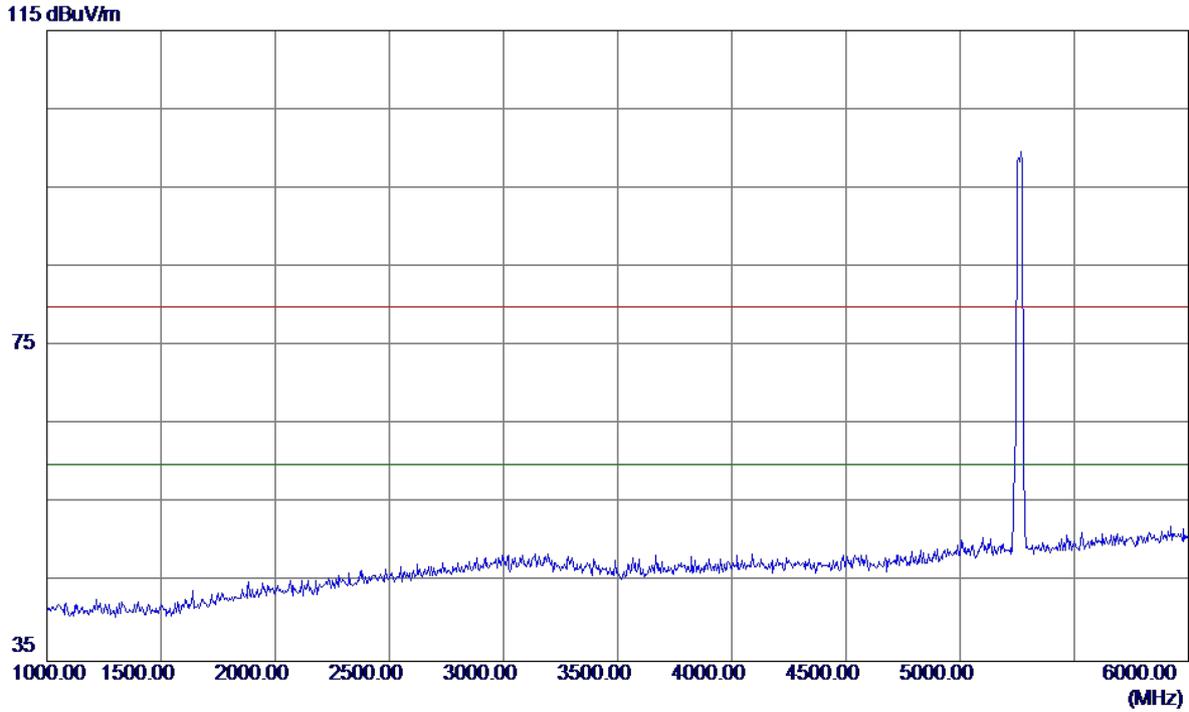

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Vertical

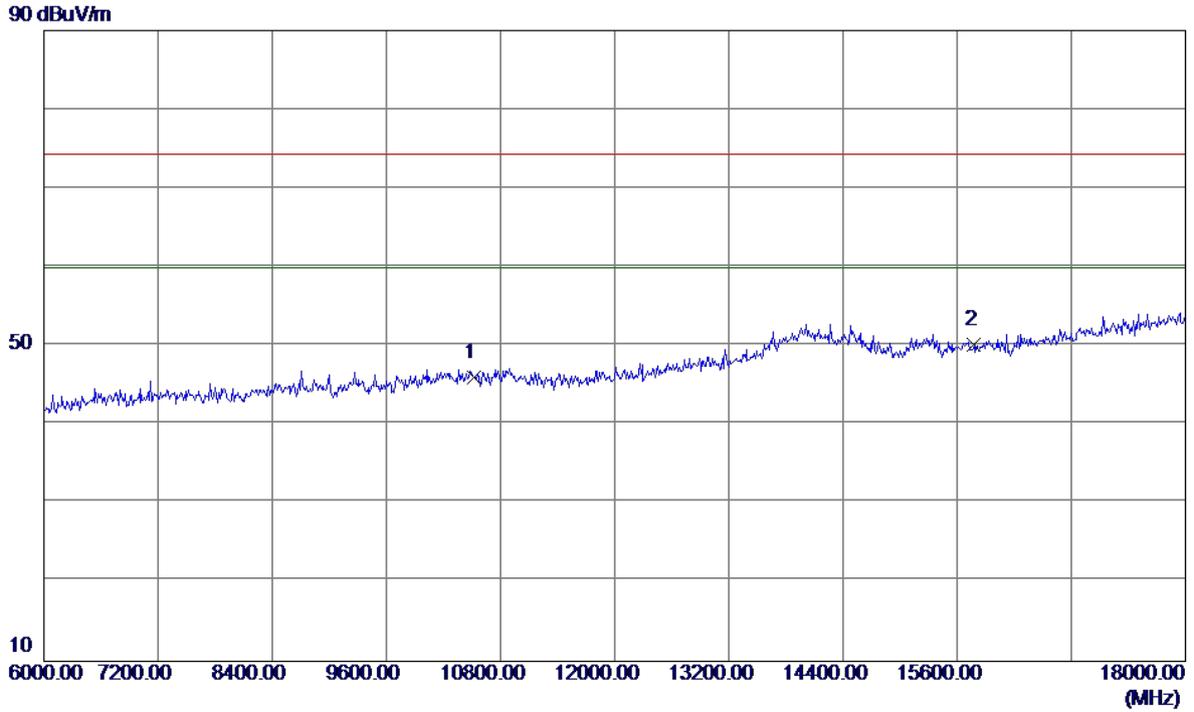

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10520.0000	30.63	15.32	45.95	74.30	-28.35	Peak	
2 *	15780.0000	32.28	17.86	50.14	74.30	-24.16	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Vertical

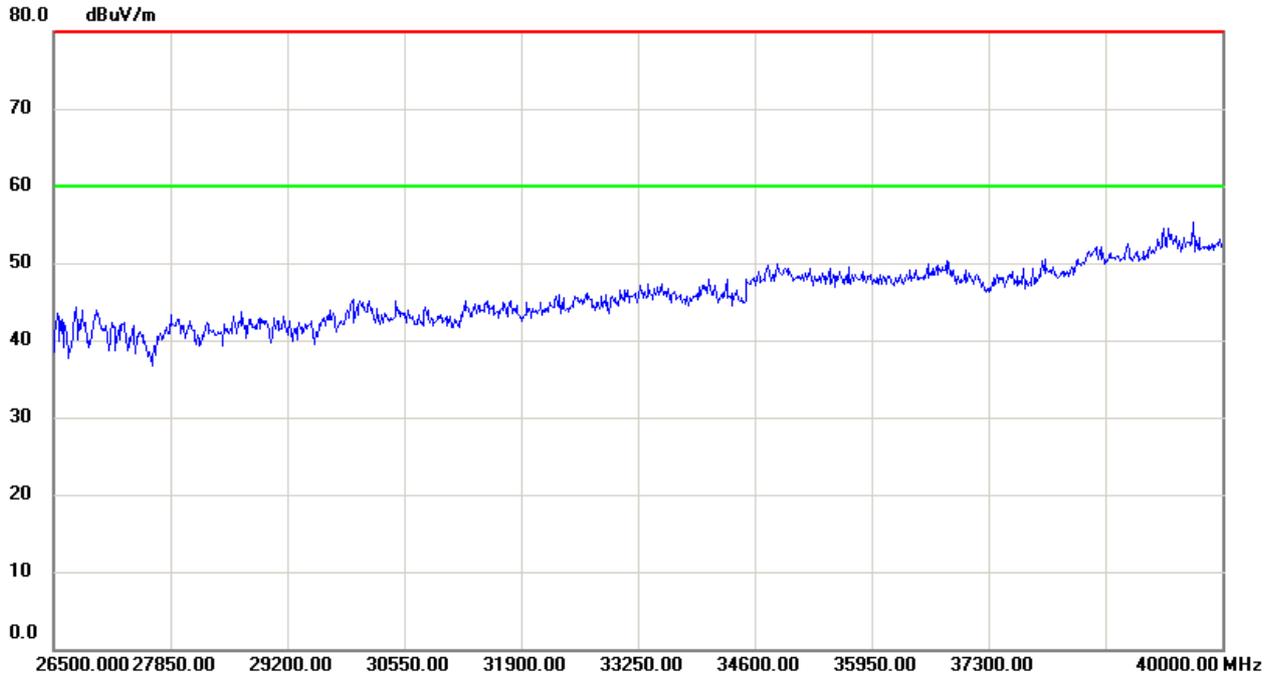

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Horizontal

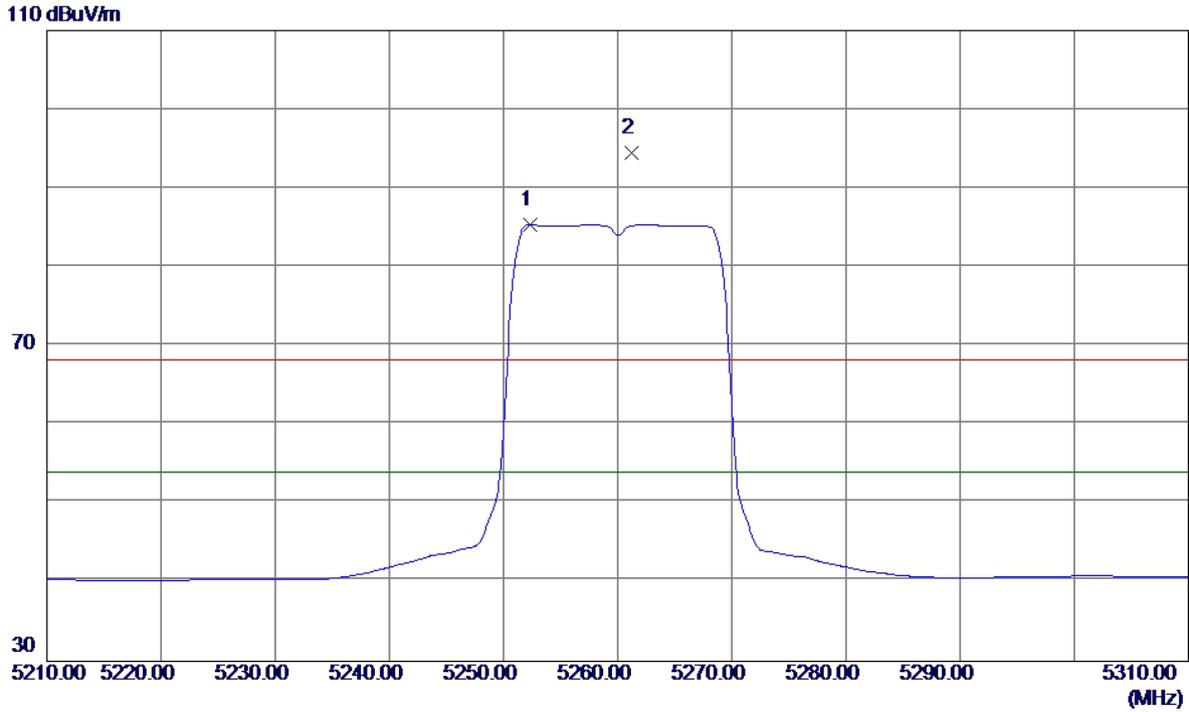

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5252.3000	44.40	40.96	85.36	54.00	31.36	AVG	No Limit
2	5261.2000	53.43	40.99	94.42	68.30	26.12	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Horizontal

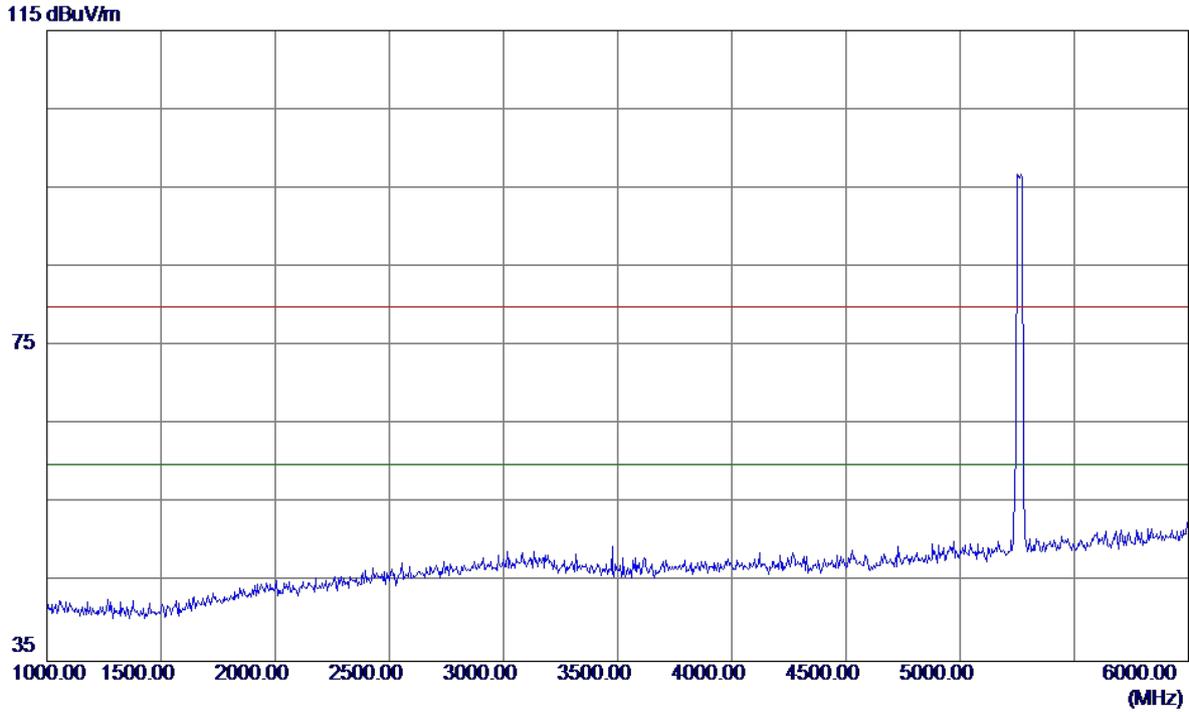

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

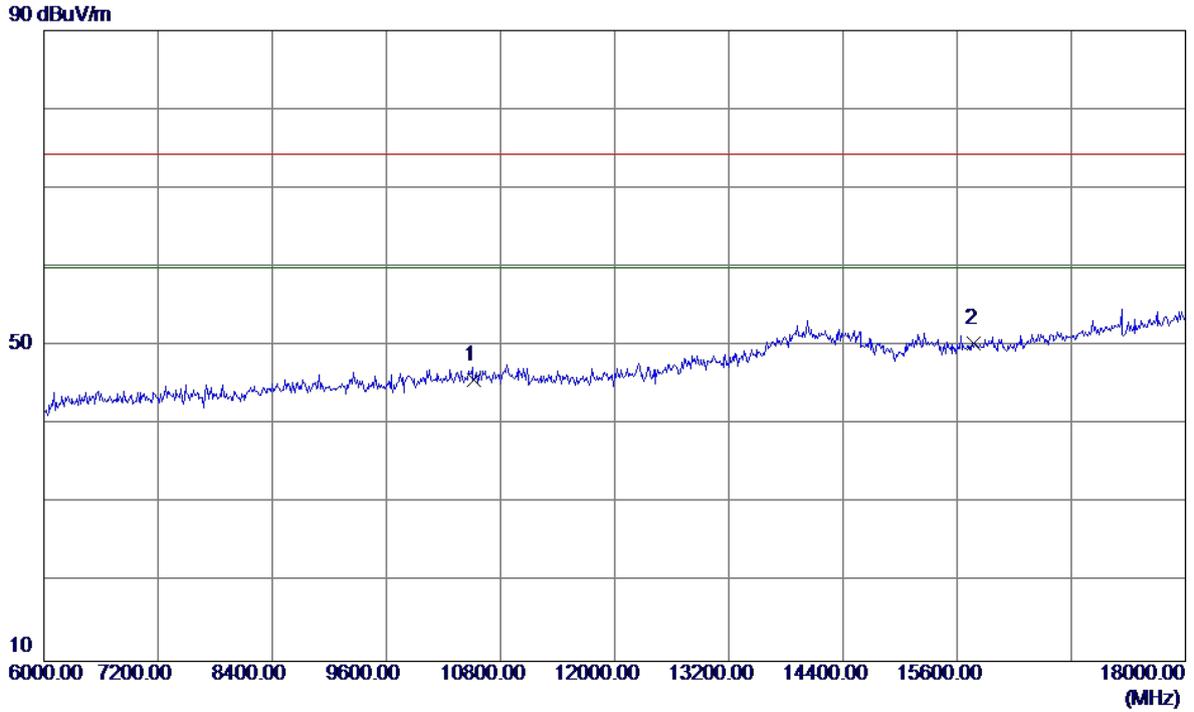


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10520.0000	30.30	15.32	45.62	74.30	-28.68	Peak	
2 *	15780.0000	32.52	17.86	50.38	74.30	-23.92	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal


100 dBuV/m

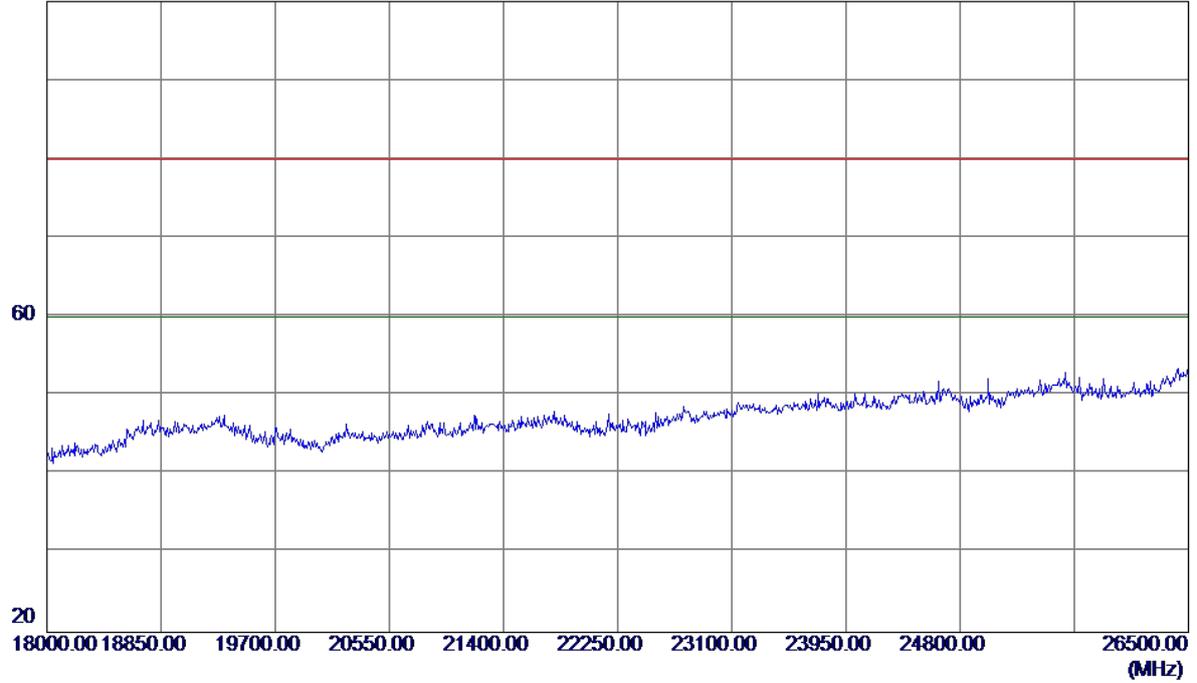

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

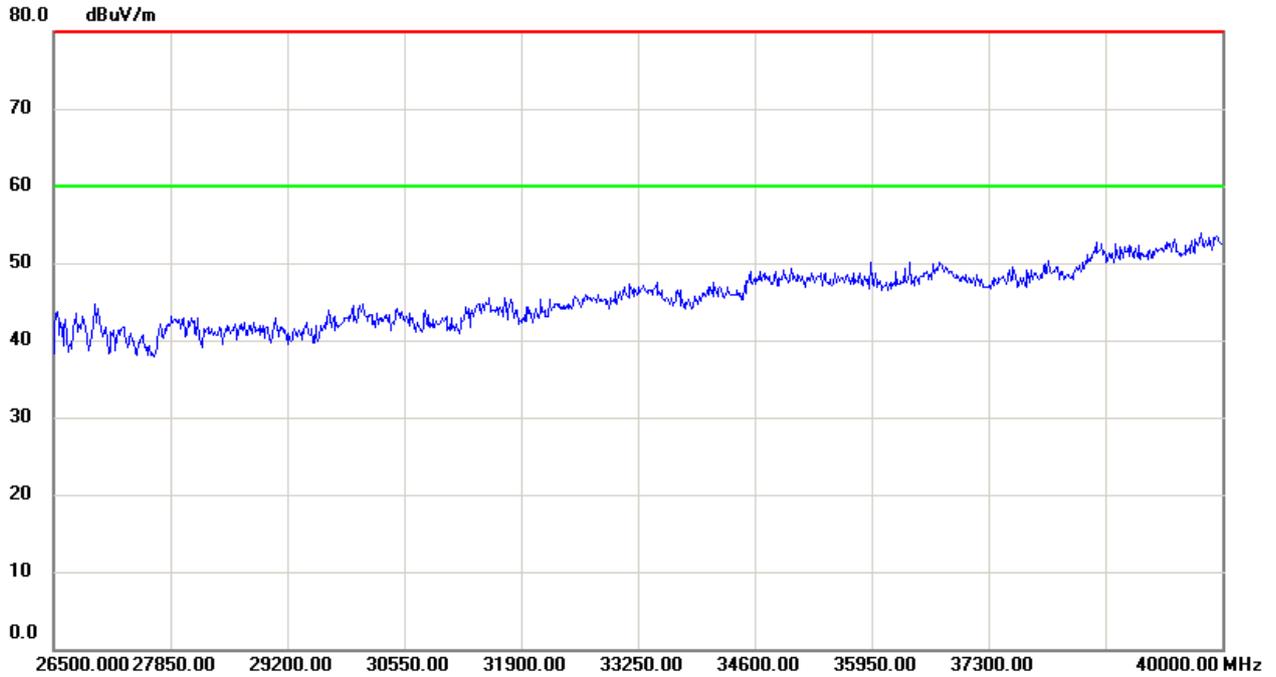


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

110 dBuV/m

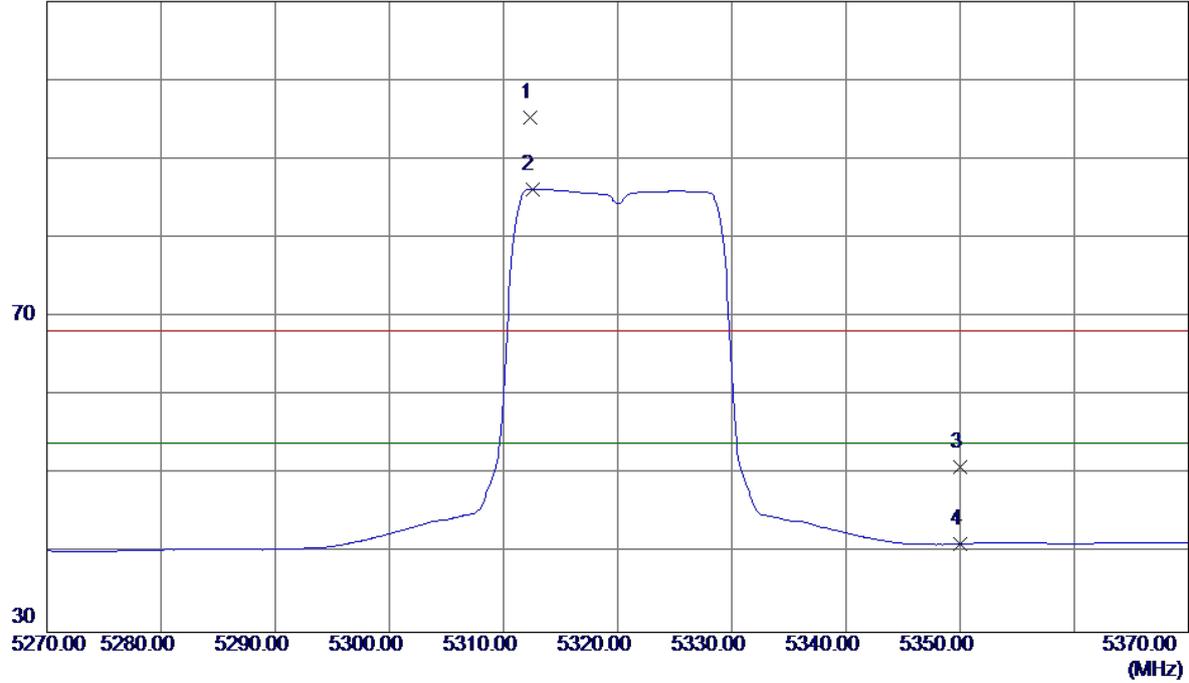


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5312.3000	54.13	41.16	95.29	68.30	26.99	Peak	No Limit
2 *	5312.5000	45.04	41.16	86.20	54.00	32.20	AVG	No Limit
3	5350.0000	9.69	41.28	50.97	68.30	-17.33	Peak	
4	5350.0000	-0.10	41.28	41.18	54.00	-12.82	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical


115 dBuV/m

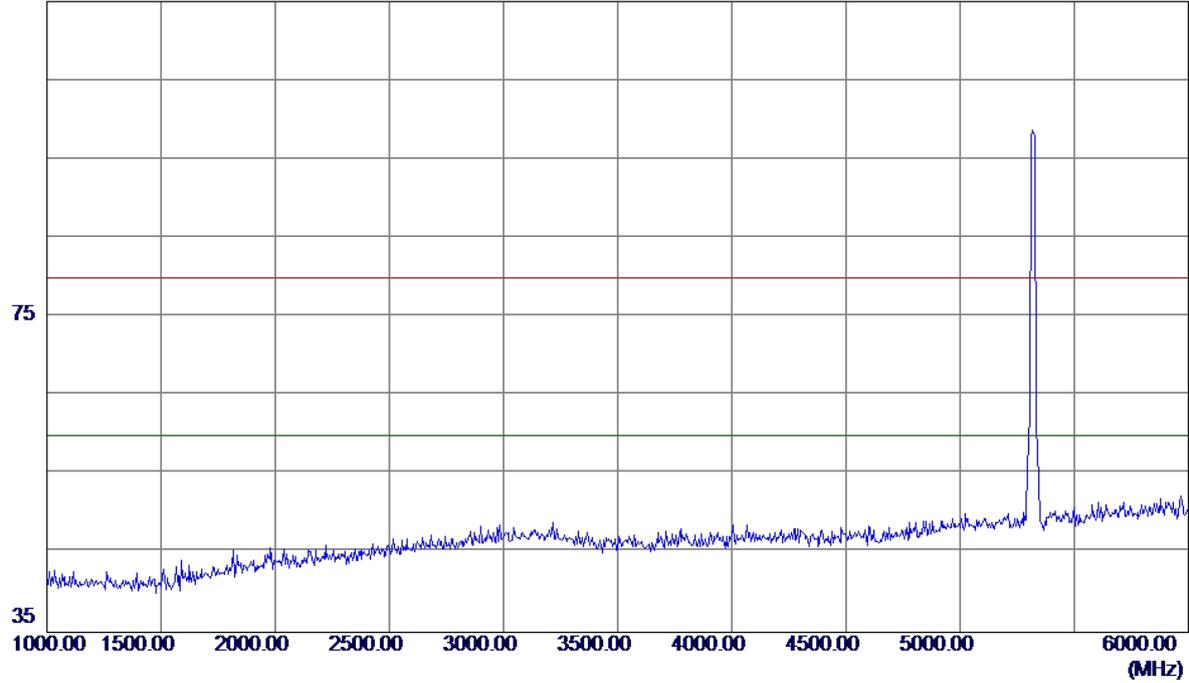

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Vertical

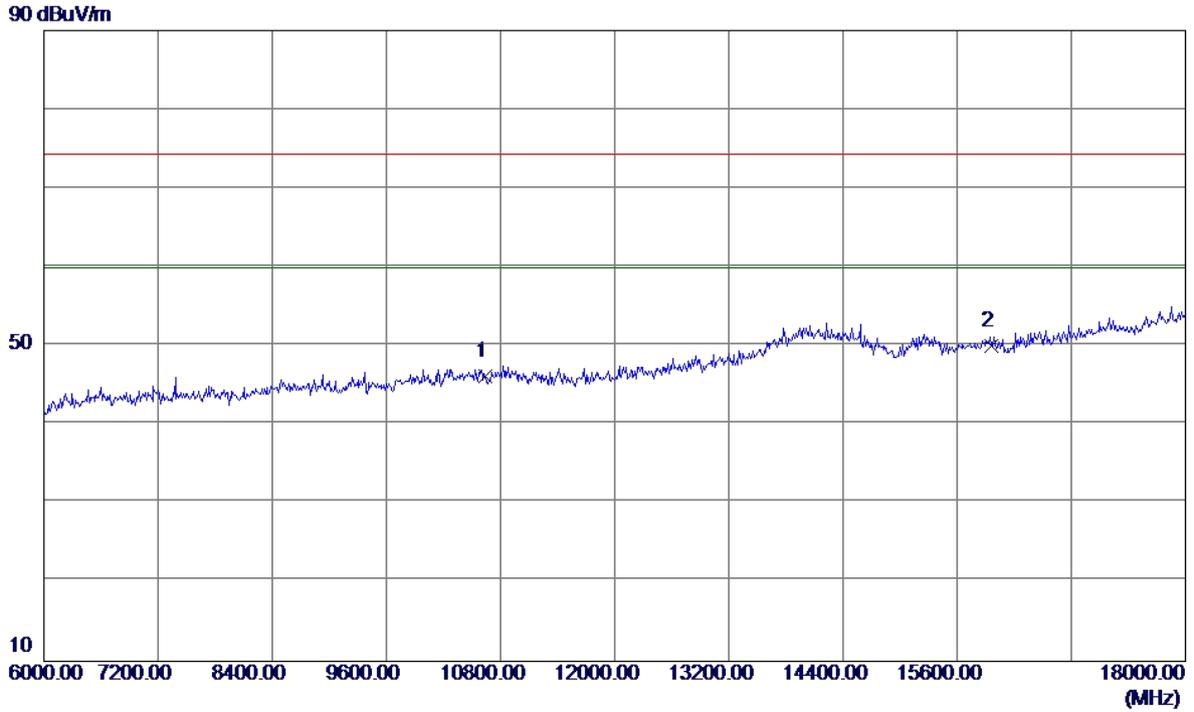

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	30.68	15.47	46.15	74.30	-28.15	Peak	
2 *	15960.0000	32.07	17.86	49.93	74.30	-24.37	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

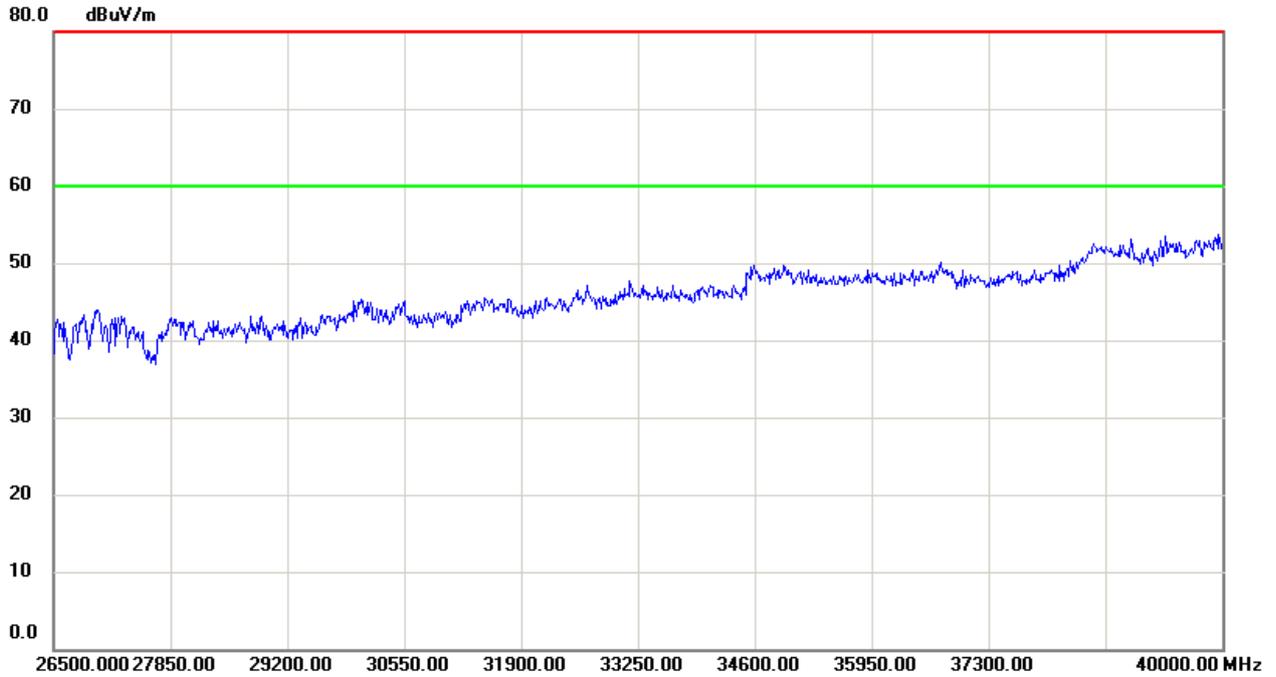


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal


110 dBuV/m

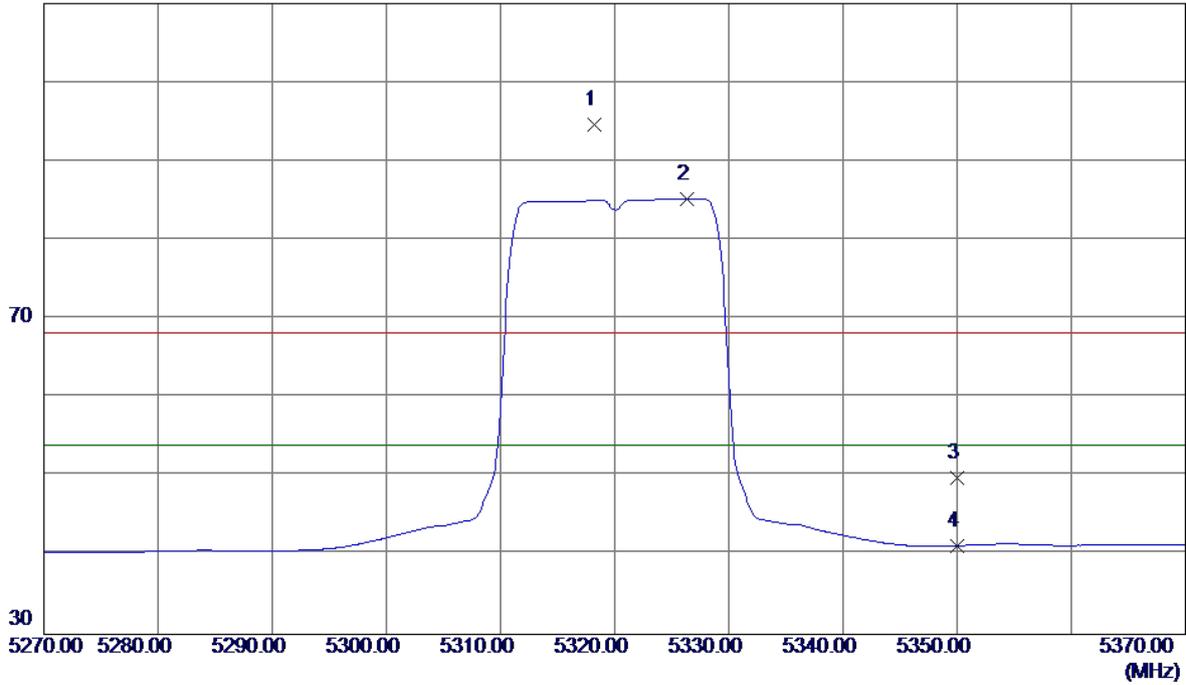

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5318.2000	53.47	41.18	94.65	68.30	26.35	Peak	No Limit
2 *	5326.3000	43.98	41.21	85.19	54.00	31.19	AVG	No Limit
3	5350.0000	8.56	41.28	49.84	68.30	-18.46	Peak	
4	5350.0000	-0.05	41.28	41.23	54.00	-12.77	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Horizontal

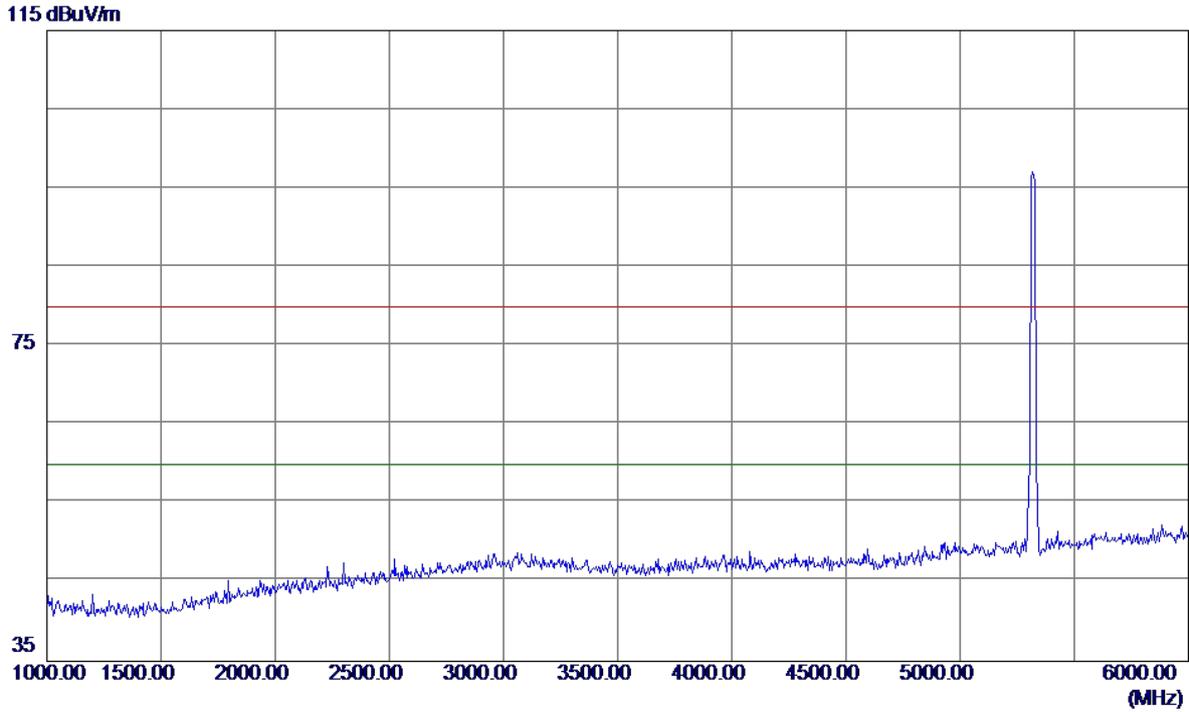

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Horizontal

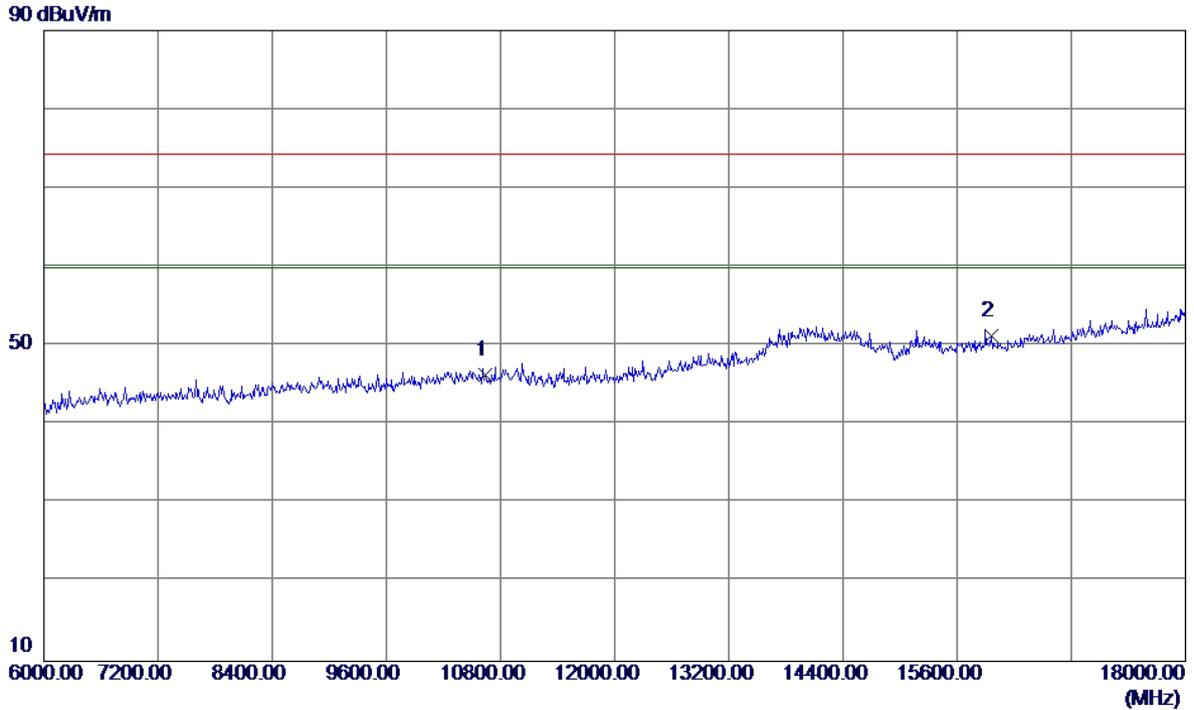

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	30.90	15.47	46.37	74.30	-27.93	Peak	
2 *	15960.0000	33.48	17.86	51.34	74.30	-22.96	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Horizontal

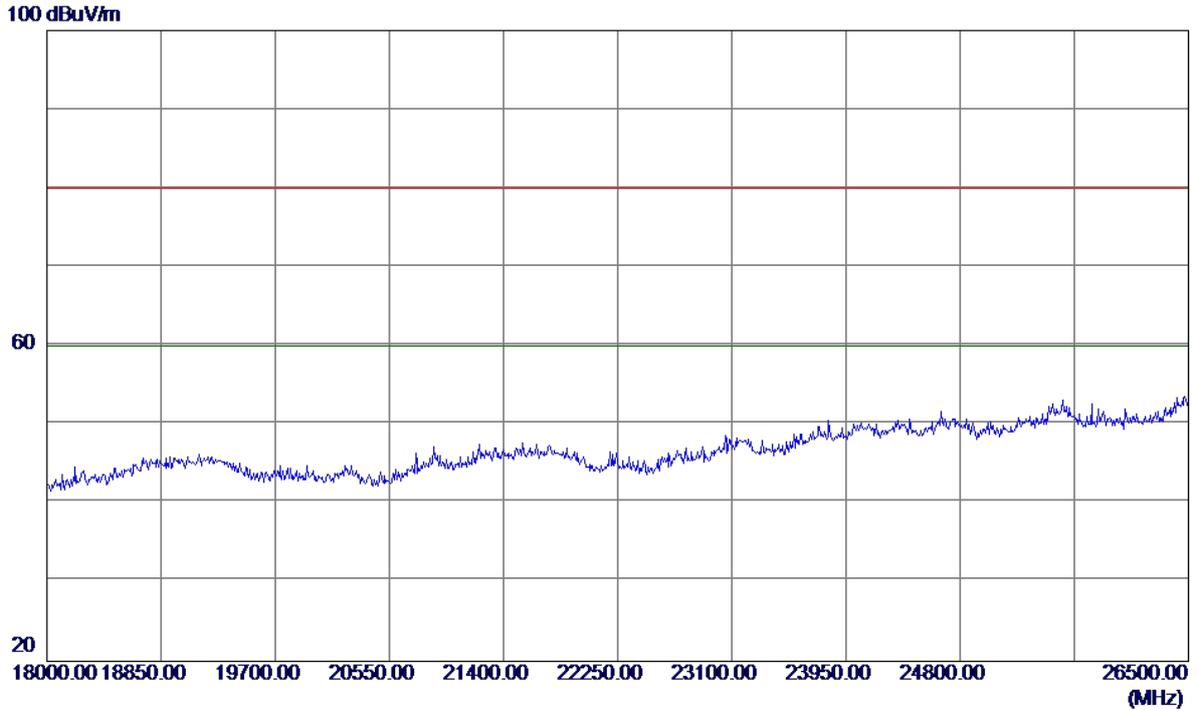

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal

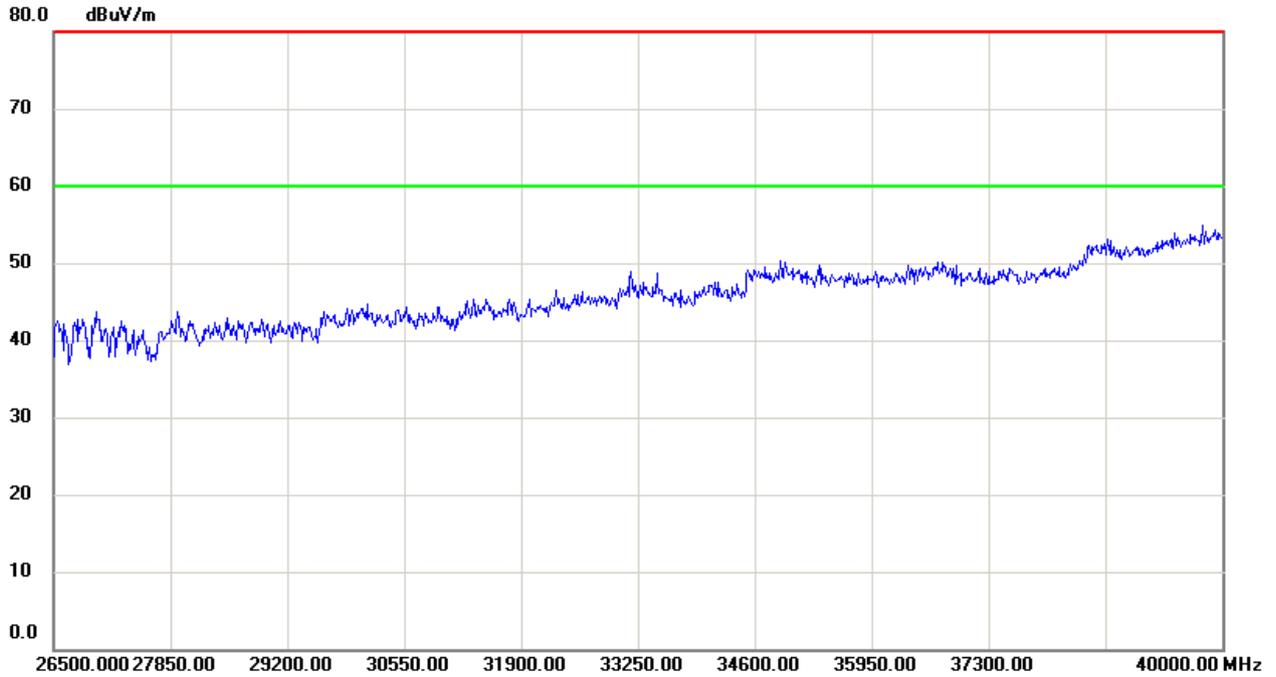


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

110 dBuV/m

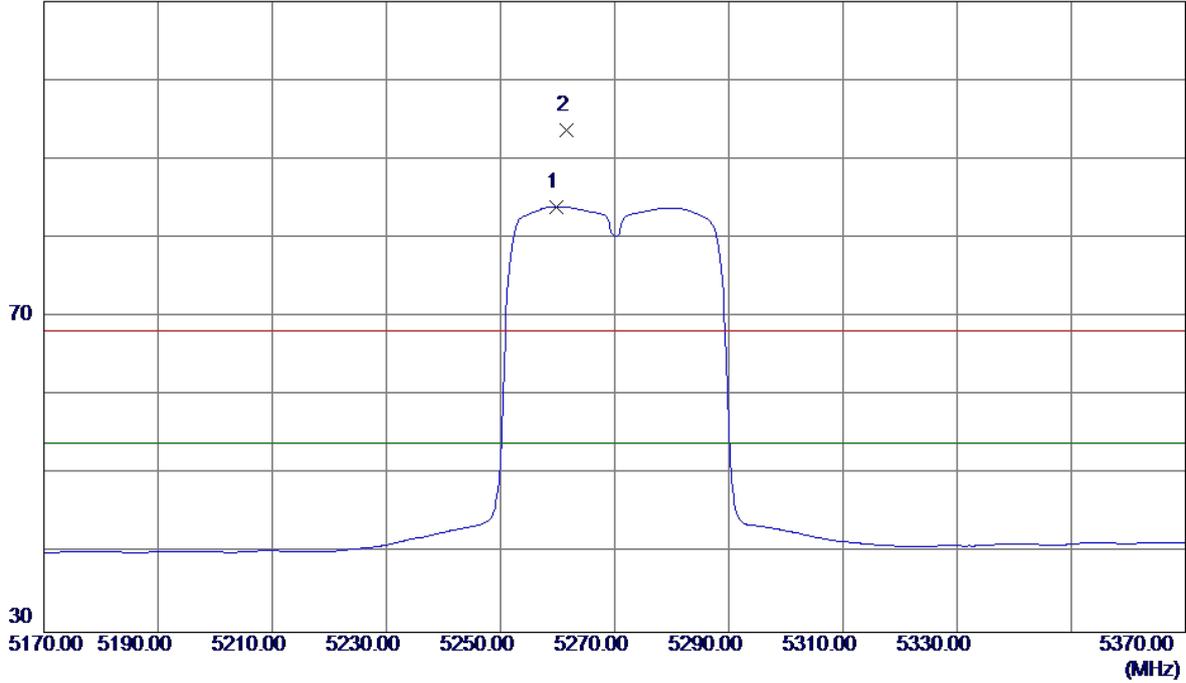


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5259.8000	42.98	40.99	83.97	54.00	29.97	AVG	No Limit
2	5261.6000	52.68	40.99	93.67	68.30	25.37	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical


115 dBuV/m

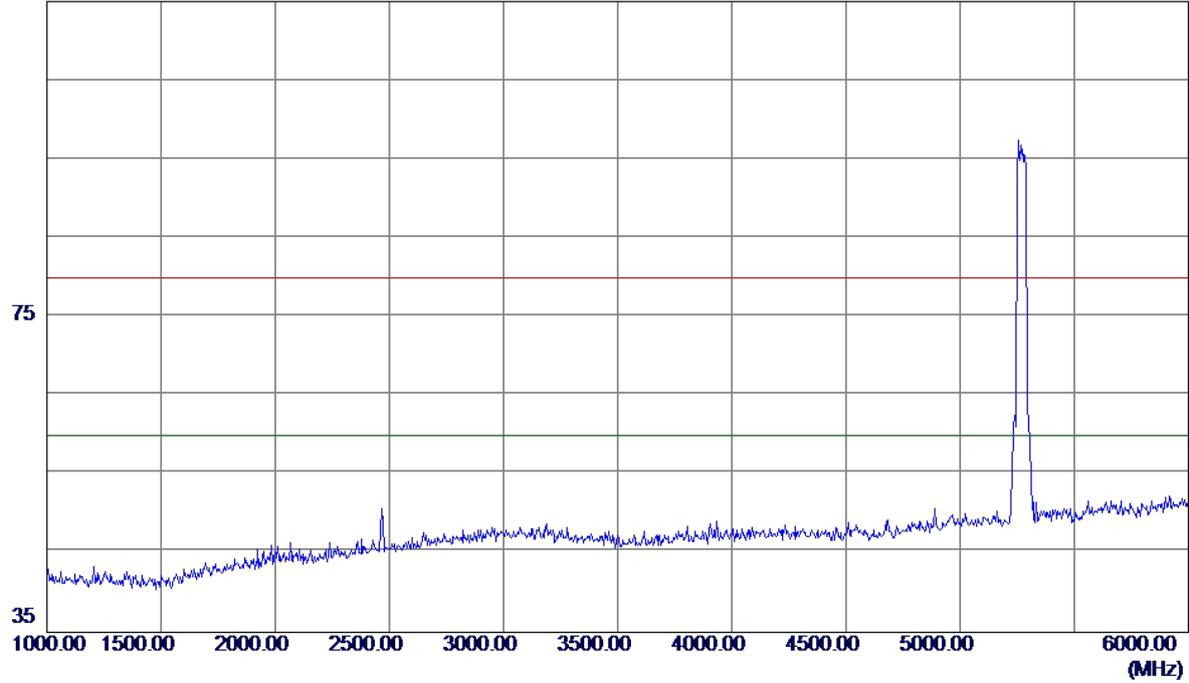

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Vertical

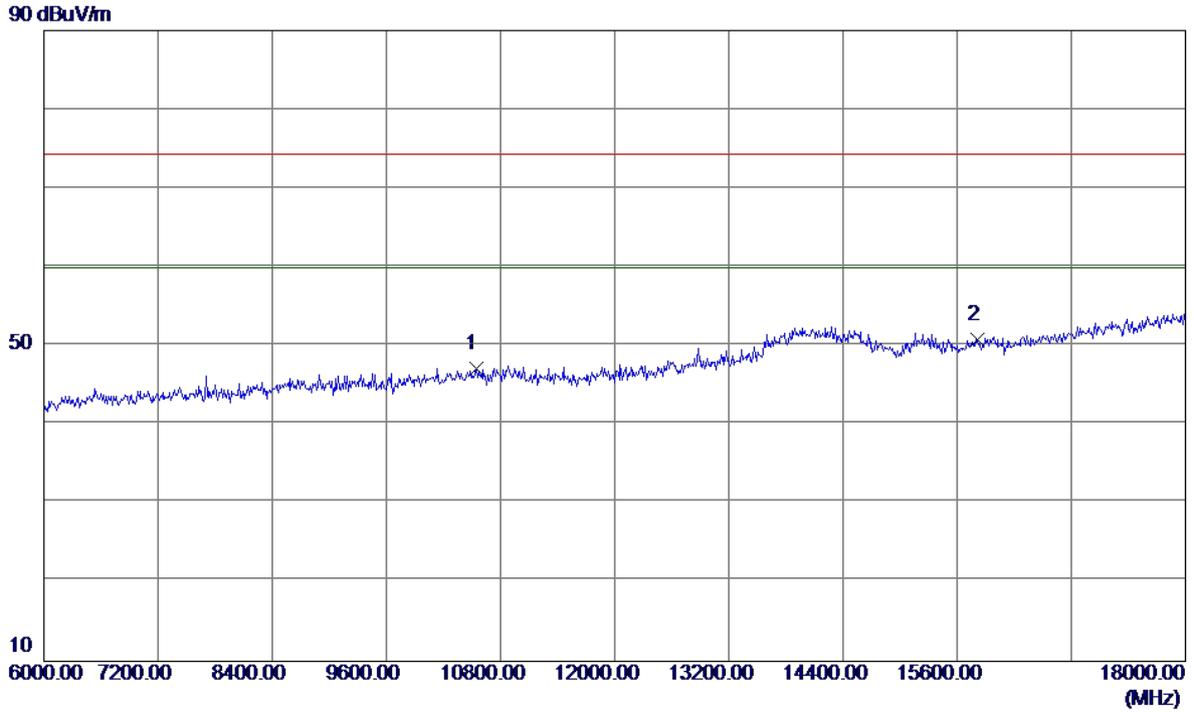

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10540.0000	31.72	15.34	47.06	74.30	-27.24	Peak	
2 *	15810.0000	32.96	17.86	50.82	74.30	-23.48	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Vertical

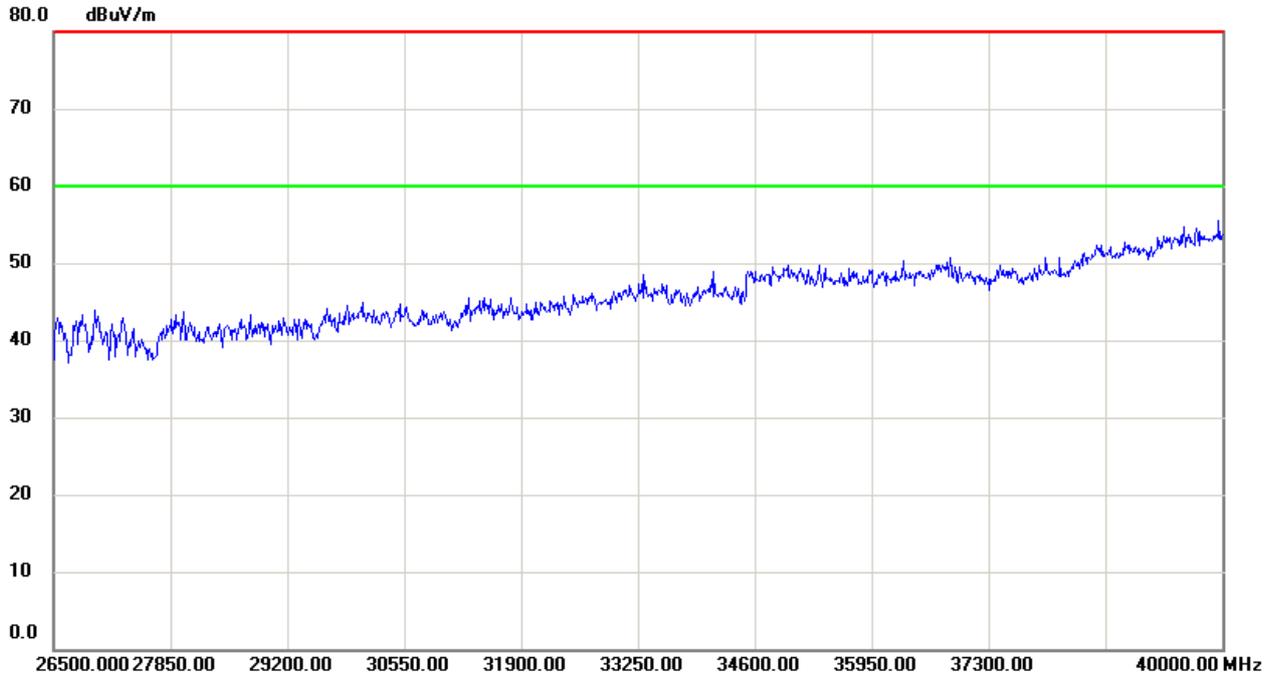

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

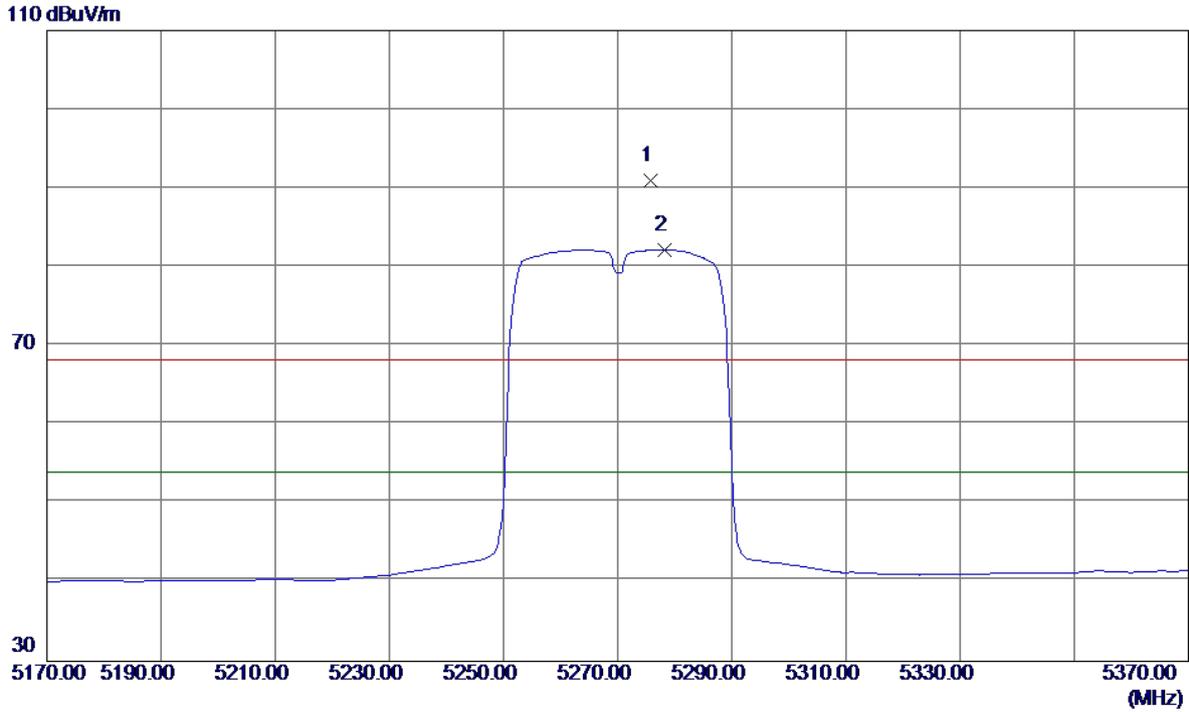


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5275.8000	49.98	41.04	91.02	68.30	22.72	Peak	No Limit
2 *	5278.2000	41.15	41.05	82.20	54.00	28.20	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal


115 dBuV/m

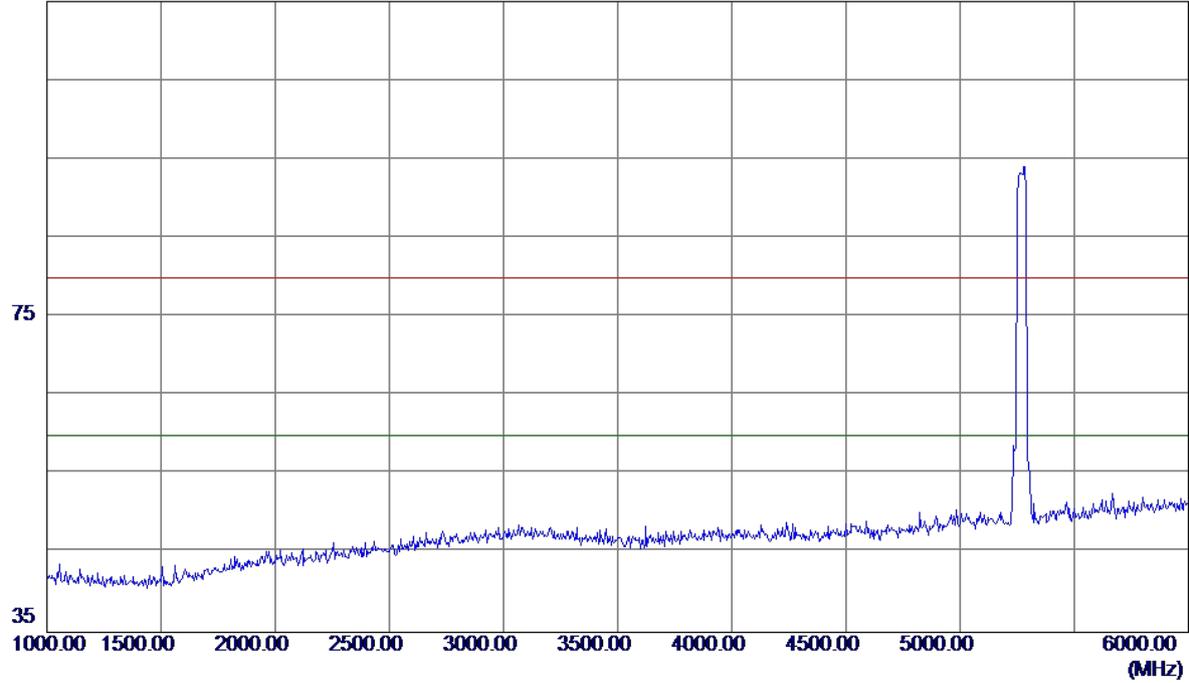

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Horizontal

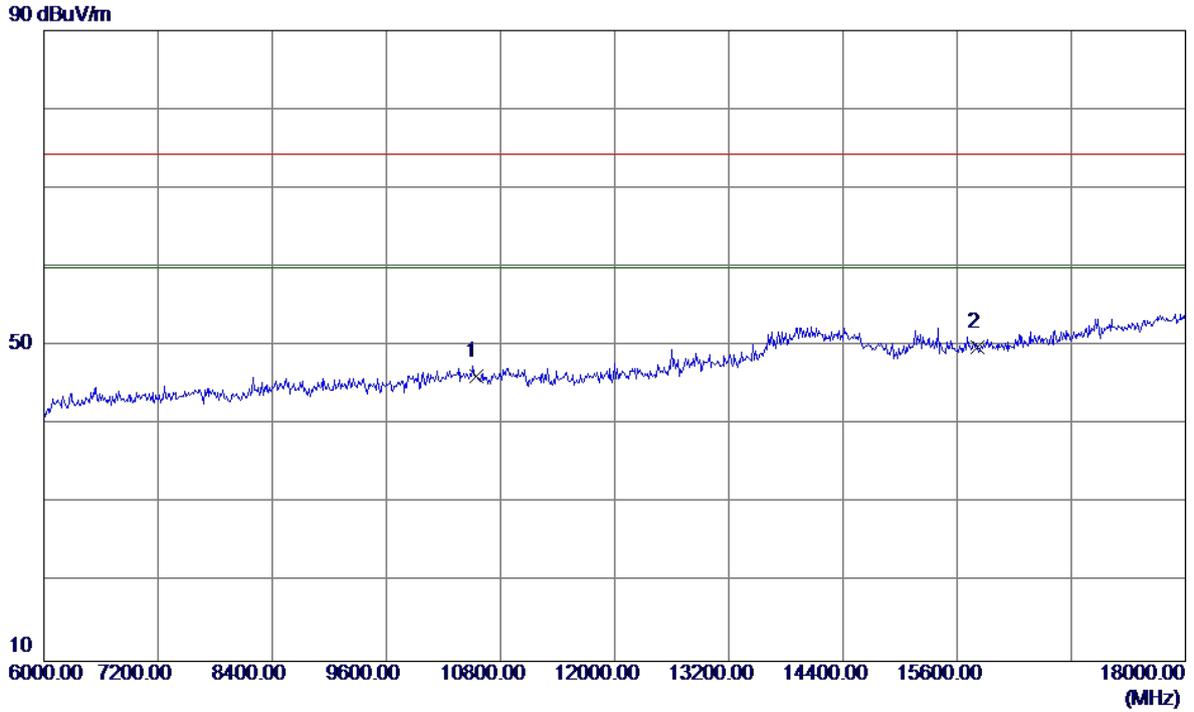

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10540.0000	30.83	15.34	46.17	74.30	-28.13	Peak	
2 *	15810.0000	31.98	17.86	49.84	74.30	-24.46	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

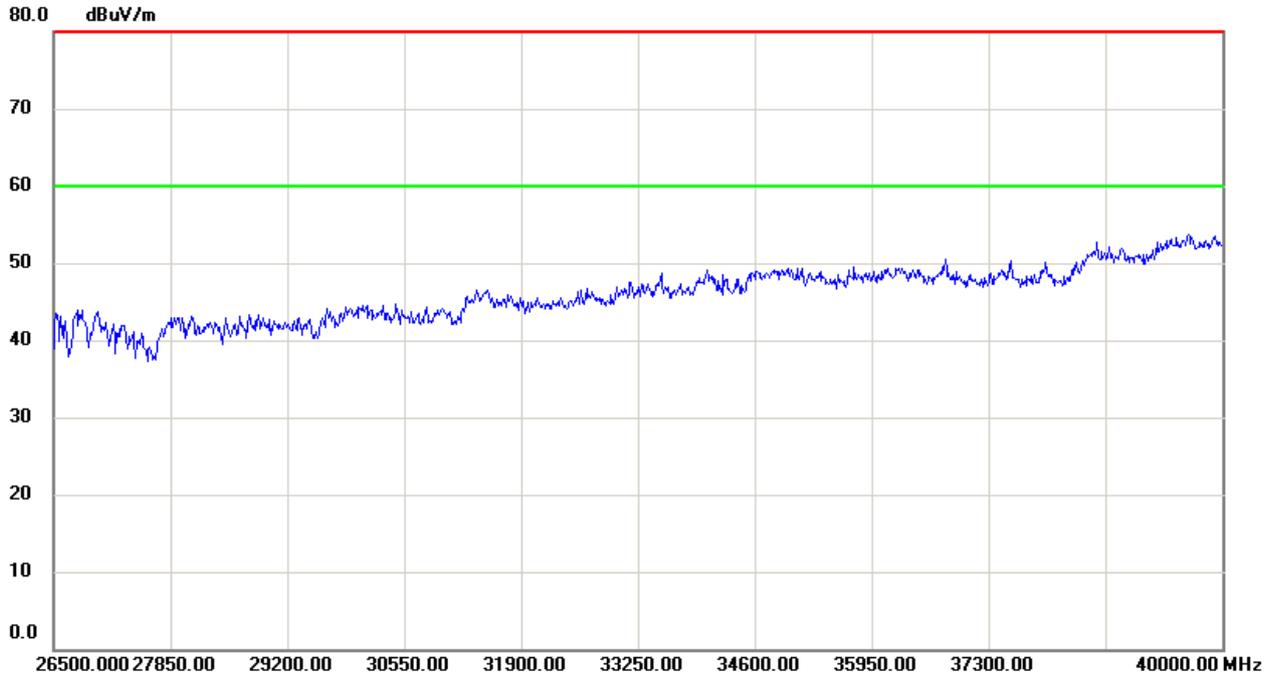


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical


110 dBuV/m

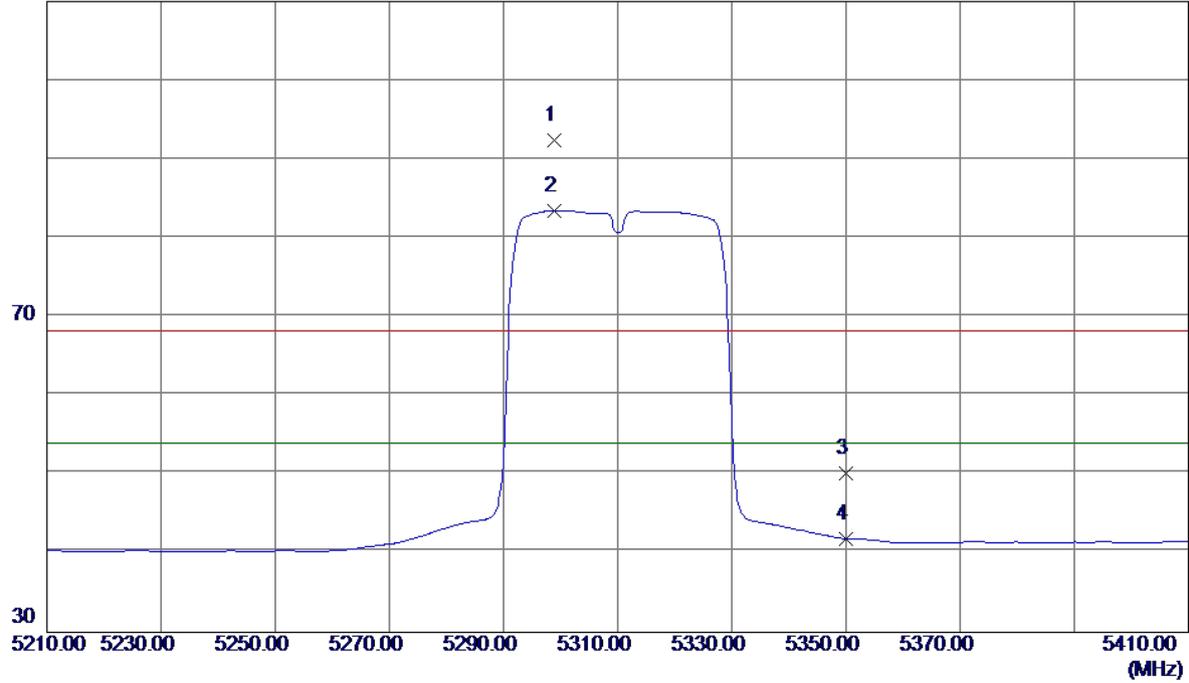

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5298.8000	51.23	41.12	92.35	68.30	24.05	Peak	No Limit
2 *	5298.8000	42.40	41.12	83.52	54.00	29.52	AVG	No Limit
3	5350.0000	8.83	41.28	50.11	68.30	-18.19	Peak	
4	5350.0000	0.61	41.28	41.89	54.00	-12.11	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Vertical

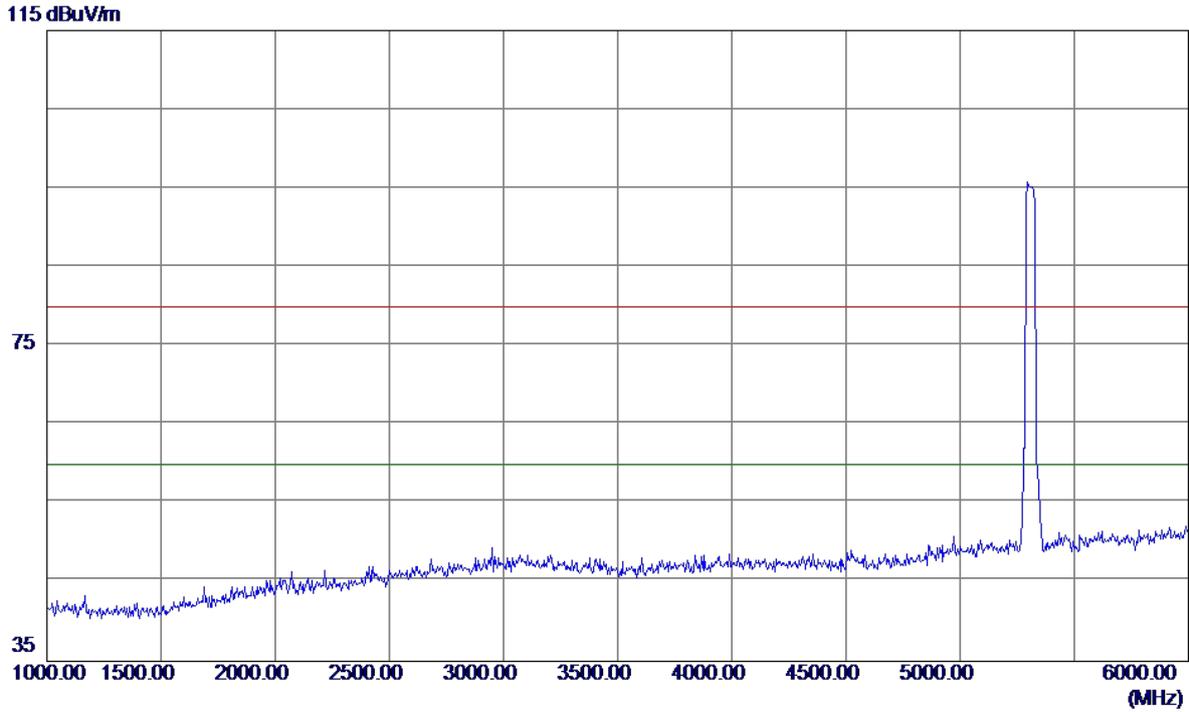

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

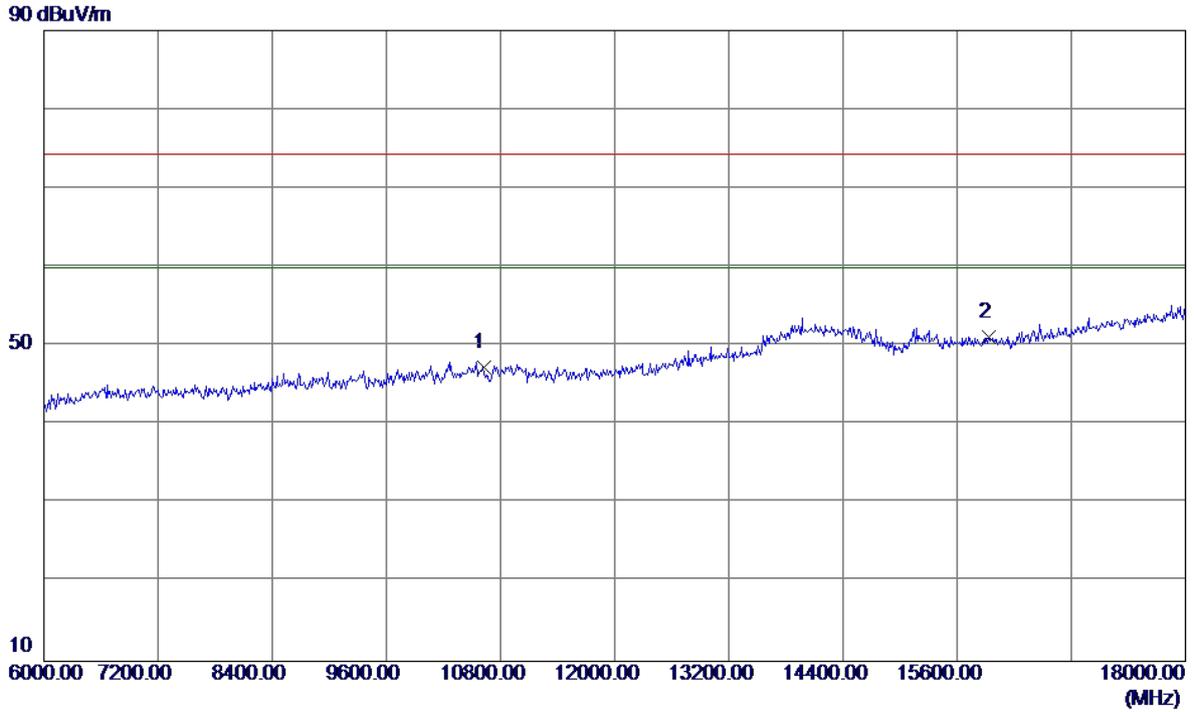


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0000	31.79	15.44	47.23	74.30	-27.07	Peak	
2 *	15930.0000	33.24	17.86	51.10	74.30	-23.20	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical


100 dBuV/m

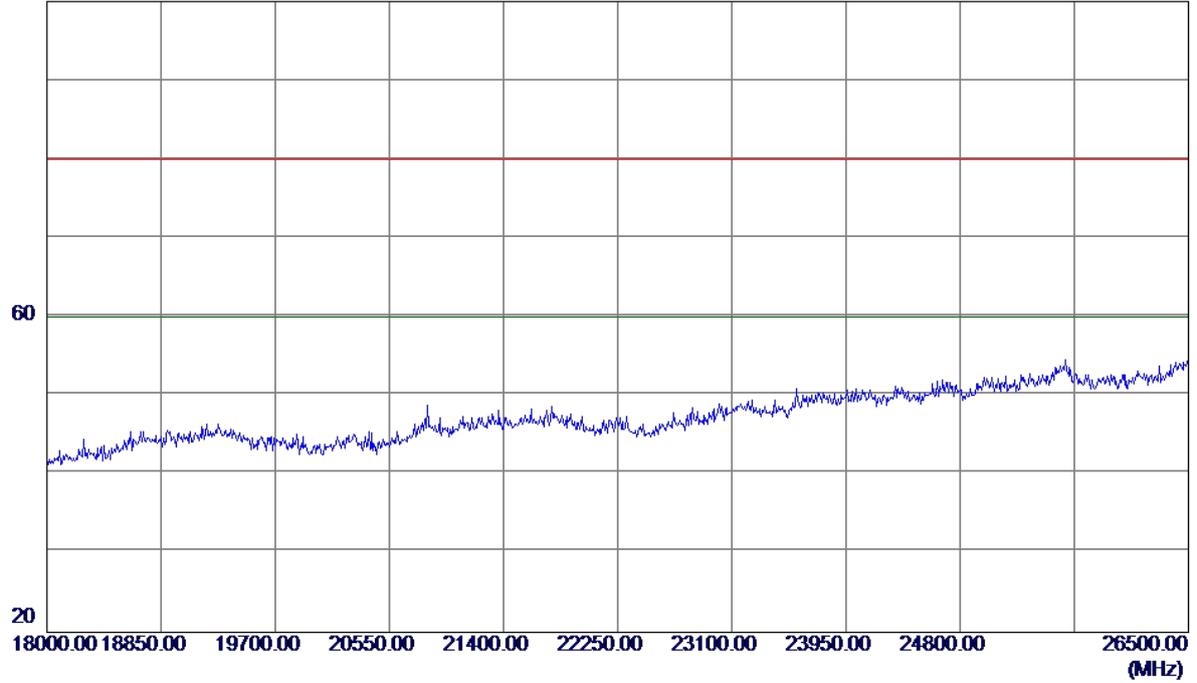

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

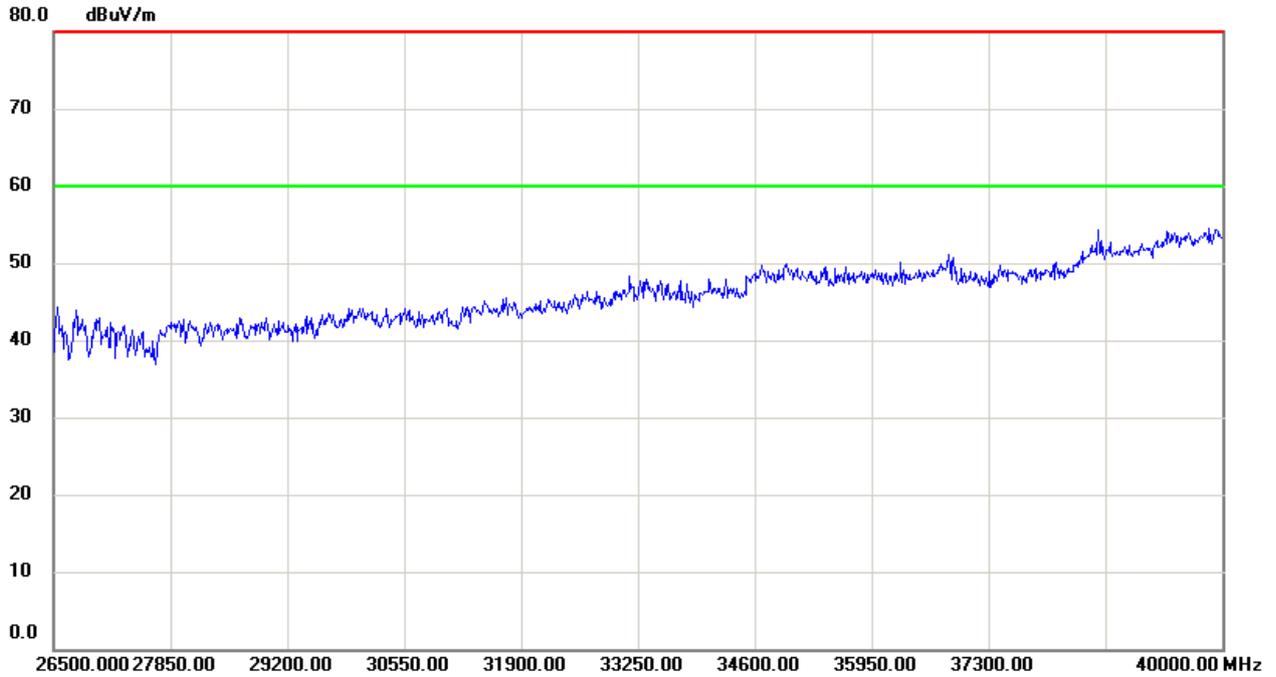


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

110 dBuV/m

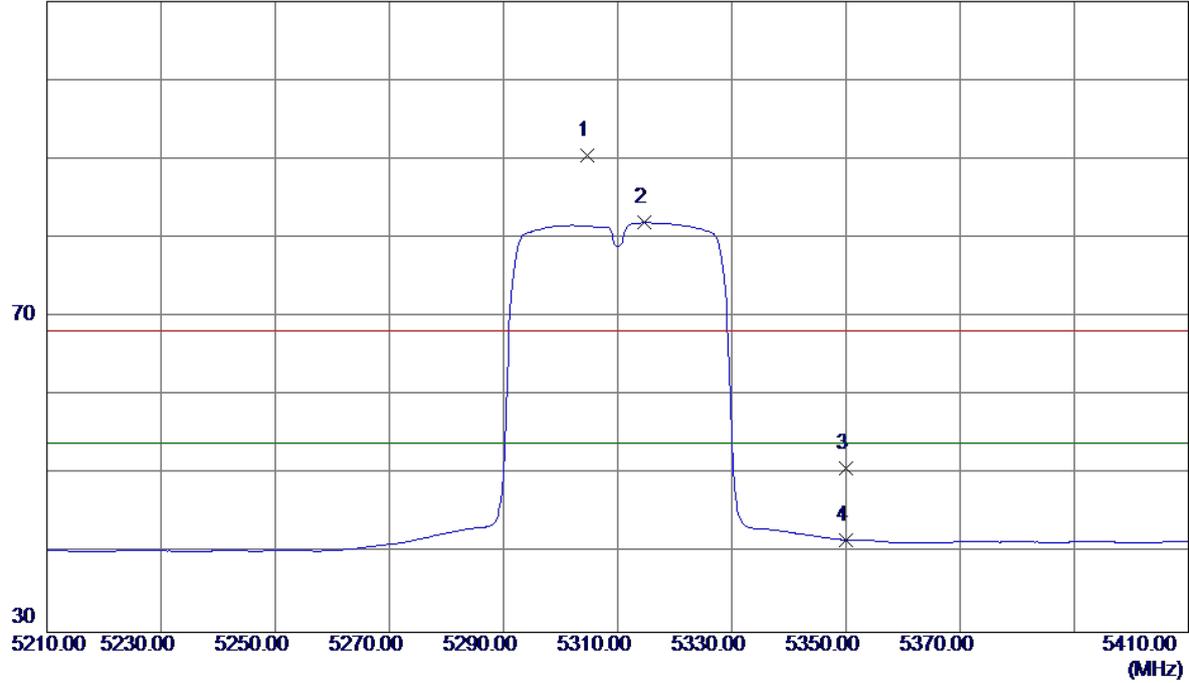


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5304.6000	49.31	41.14	90.45	68.30	22.15	Peak	No Limit
2 *	5314.6000	40.77	41.17	81.94	54.00	27.94	AVG	No Limit
3	5350.0000	9.53	41.28	50.81	68.30	-17.49	Peak	
4	5350.0000	0.43	41.28	41.71	54.00	-12.29	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal


115 dBuV/m

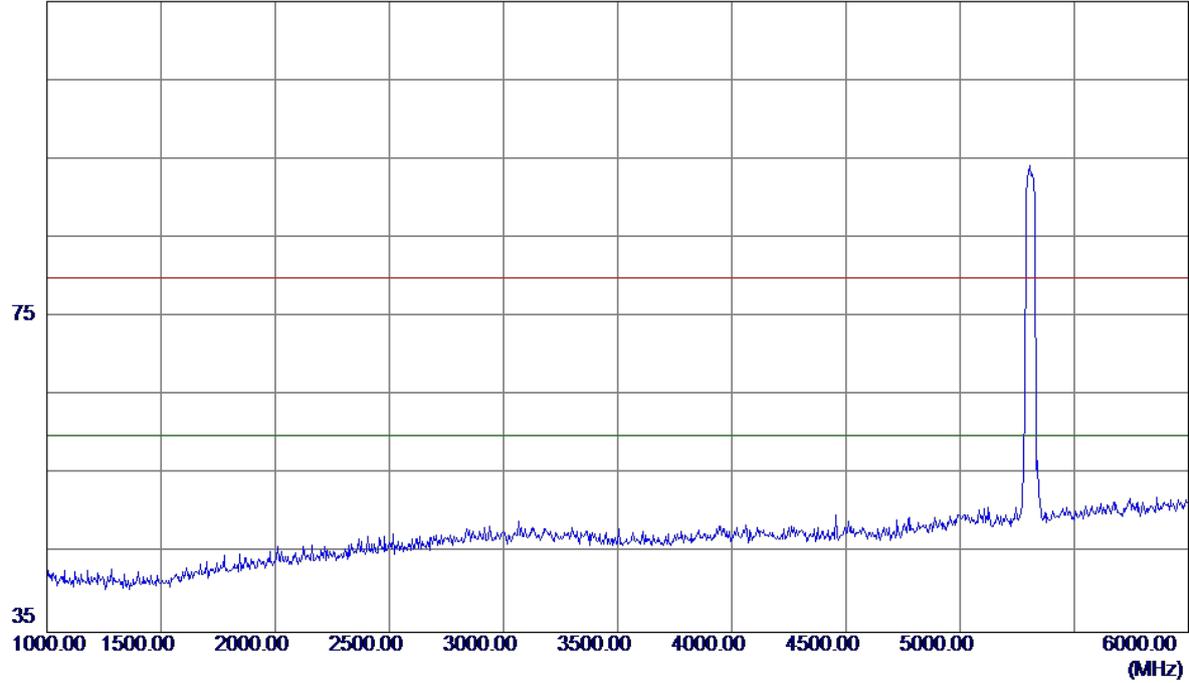

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

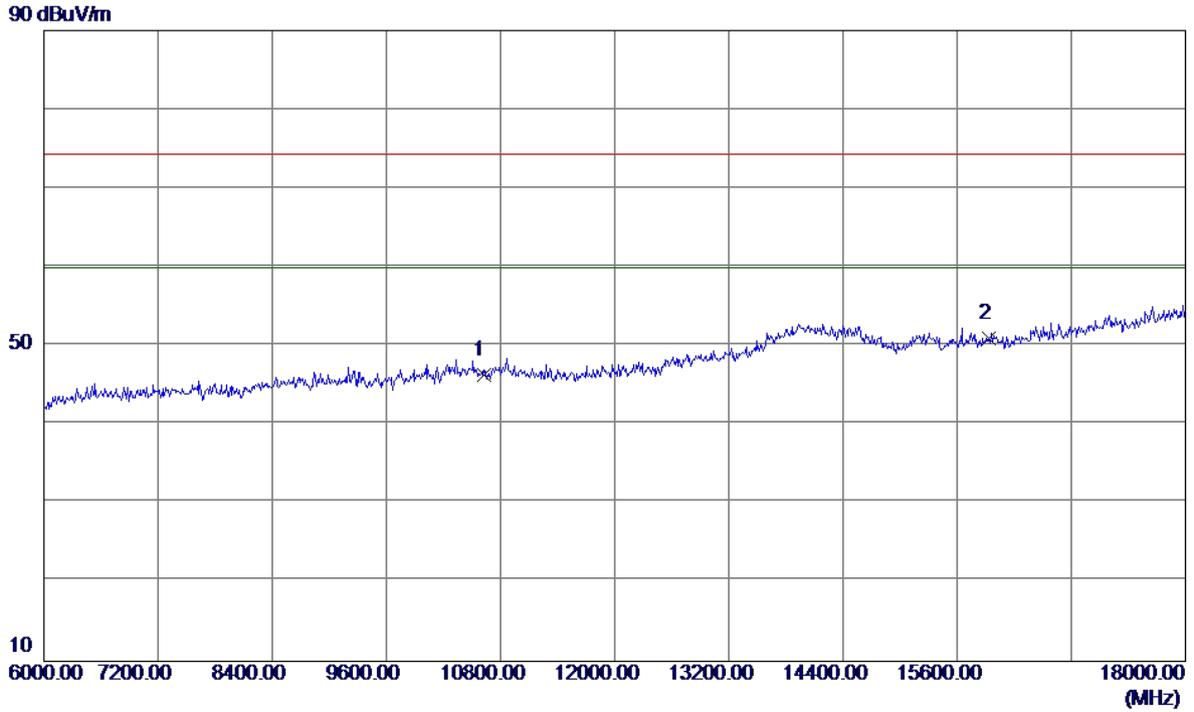


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0000	30.95	15.44	46.39	74.30	-27.91	Peak	
2 *	15930.0000	33.05	17.86	50.91	74.30	-23.39	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal


100 dBuV/m

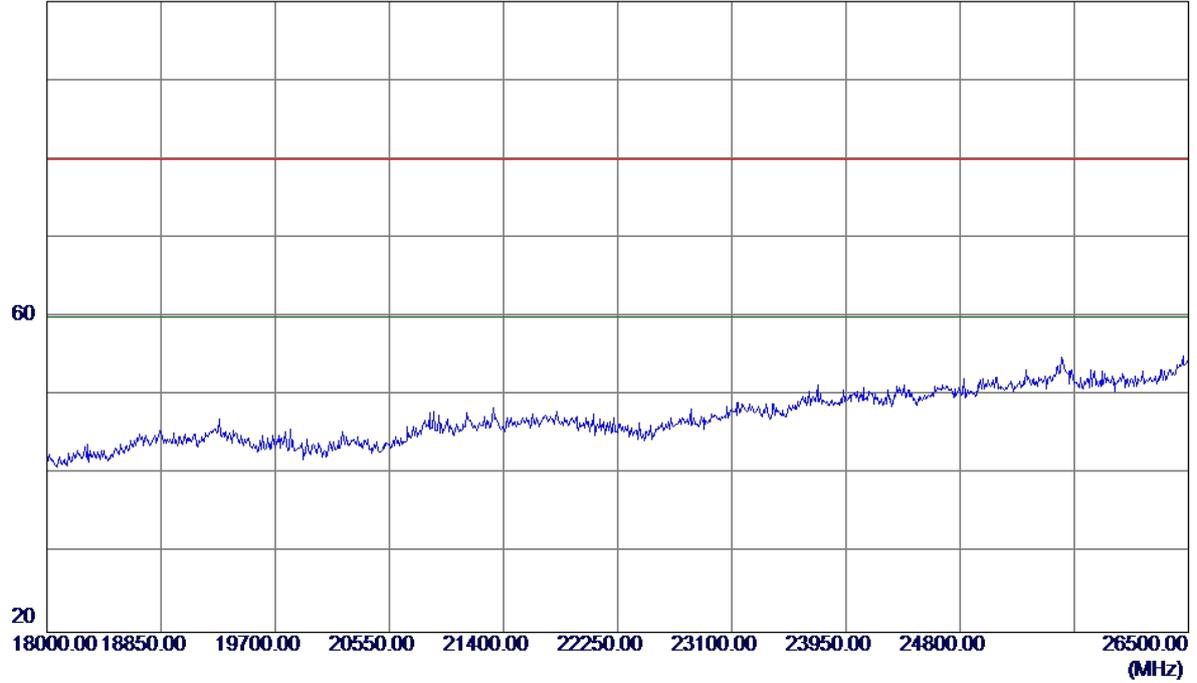

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

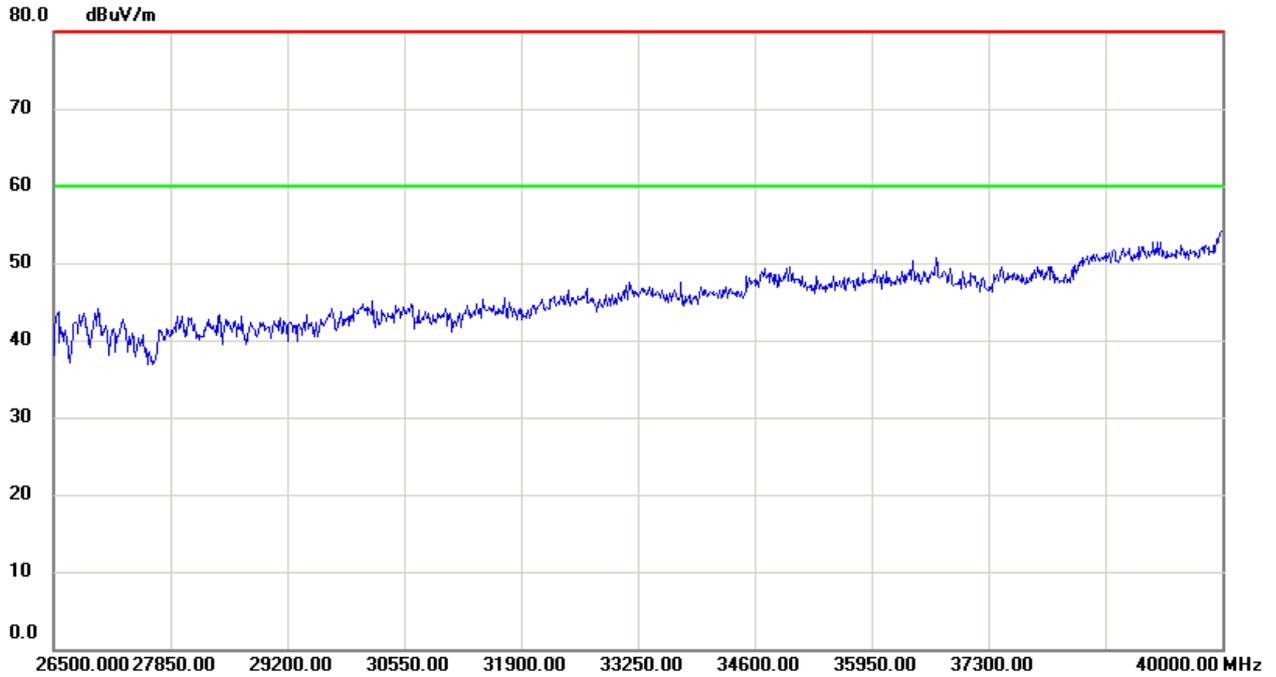


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical


110 dBuV/m

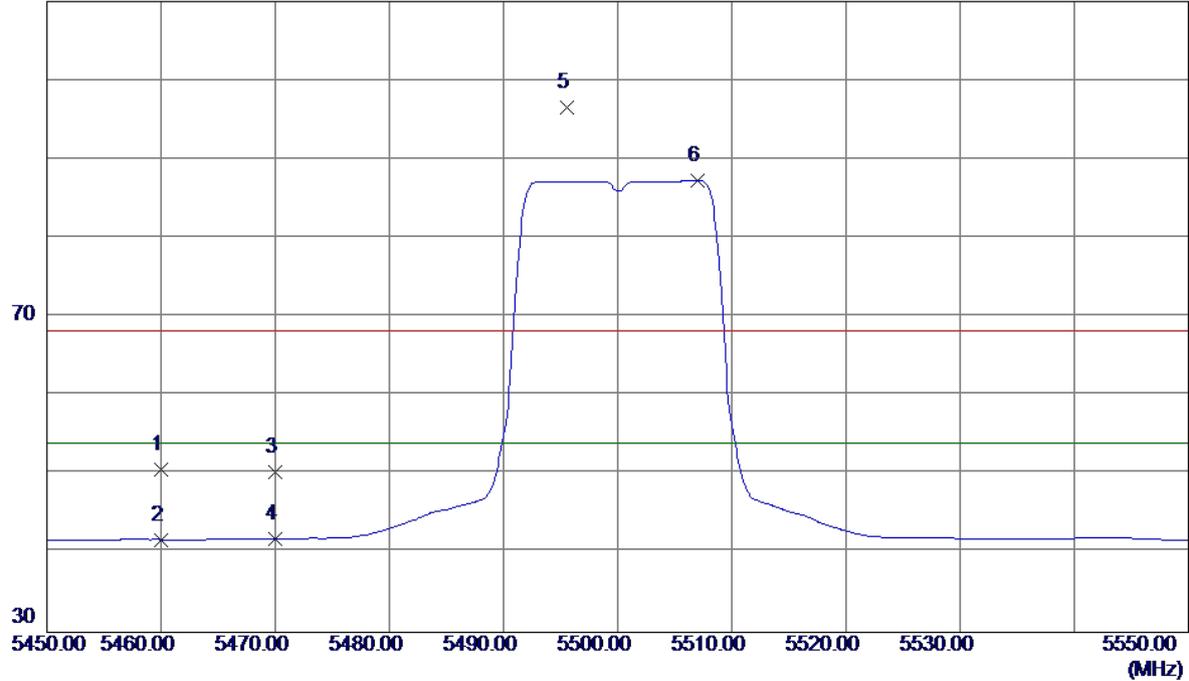

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	8.94	41.65	50.59	68.30	-17.71	Peak	
2	5460.0000	0.11	41.65	41.76	54.00	-12.24	AVG	
3	5470.0000	8.66	41.68	50.34	68.30	-17.96	Peak	
4	5470.0000	0.18	41.68	41.86	54.00	-12.14	AVG	
5	5495.6000	54.73	41.77	96.50	68.30	28.20	Peak	No Limit
6 *	5507.0000	45.47	41.80	87.27	54.00	33.27	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Vertical

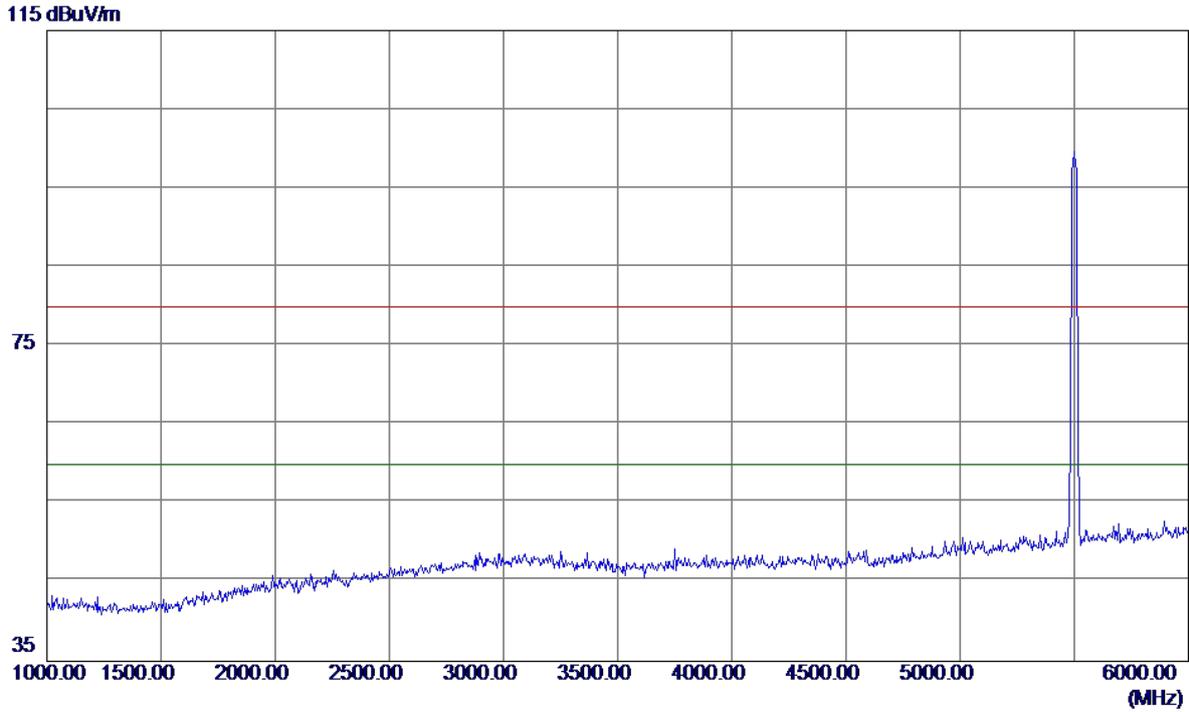

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

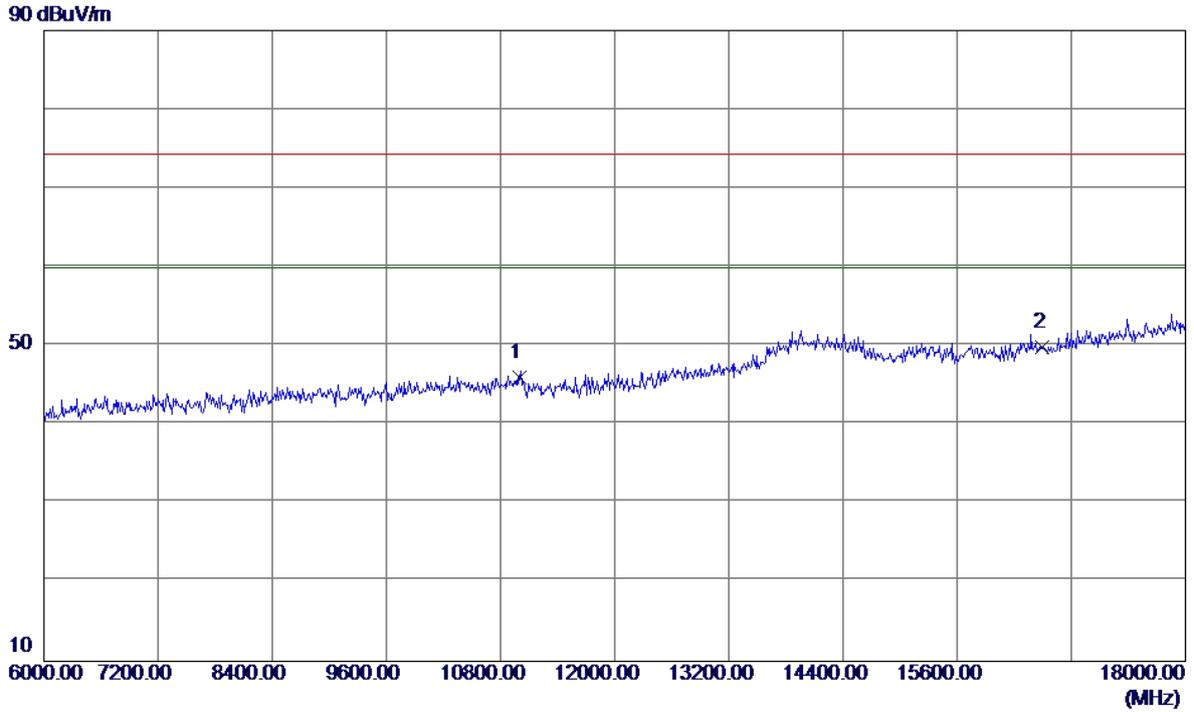


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	30.03	15.93	45.96	74.30	-28.34	Peak	
2 *	16500.0000	31.93	17.94	49.87	74.30	-24.43	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Vertical

100 dBuV/m

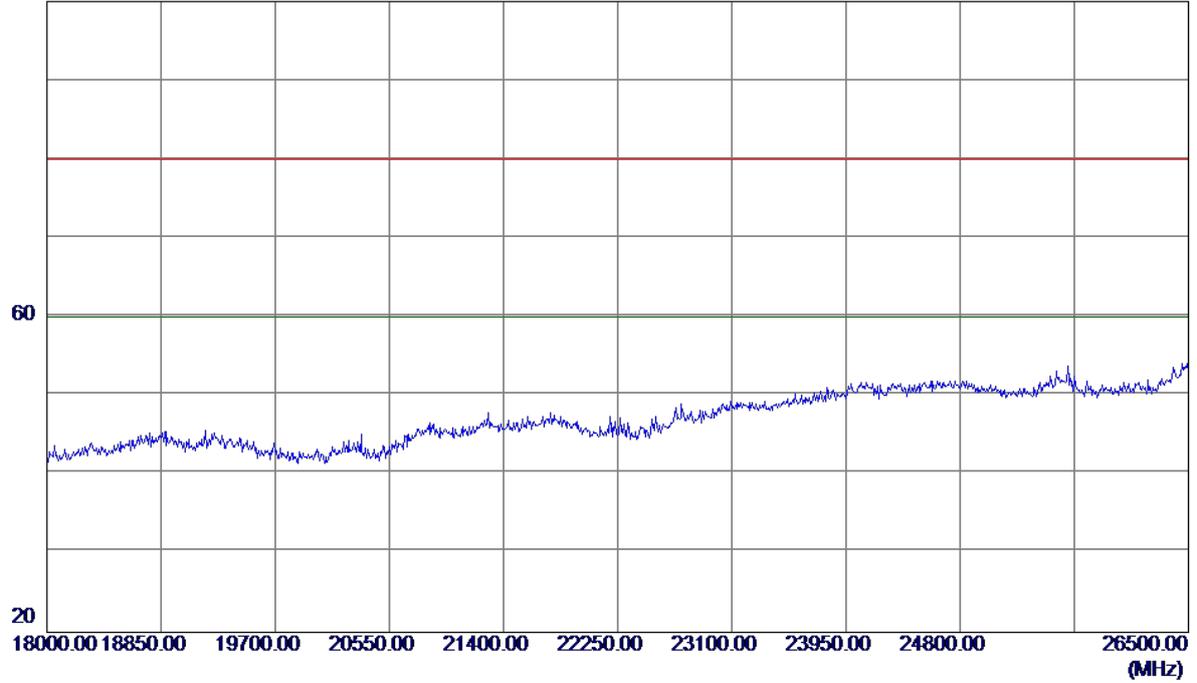

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

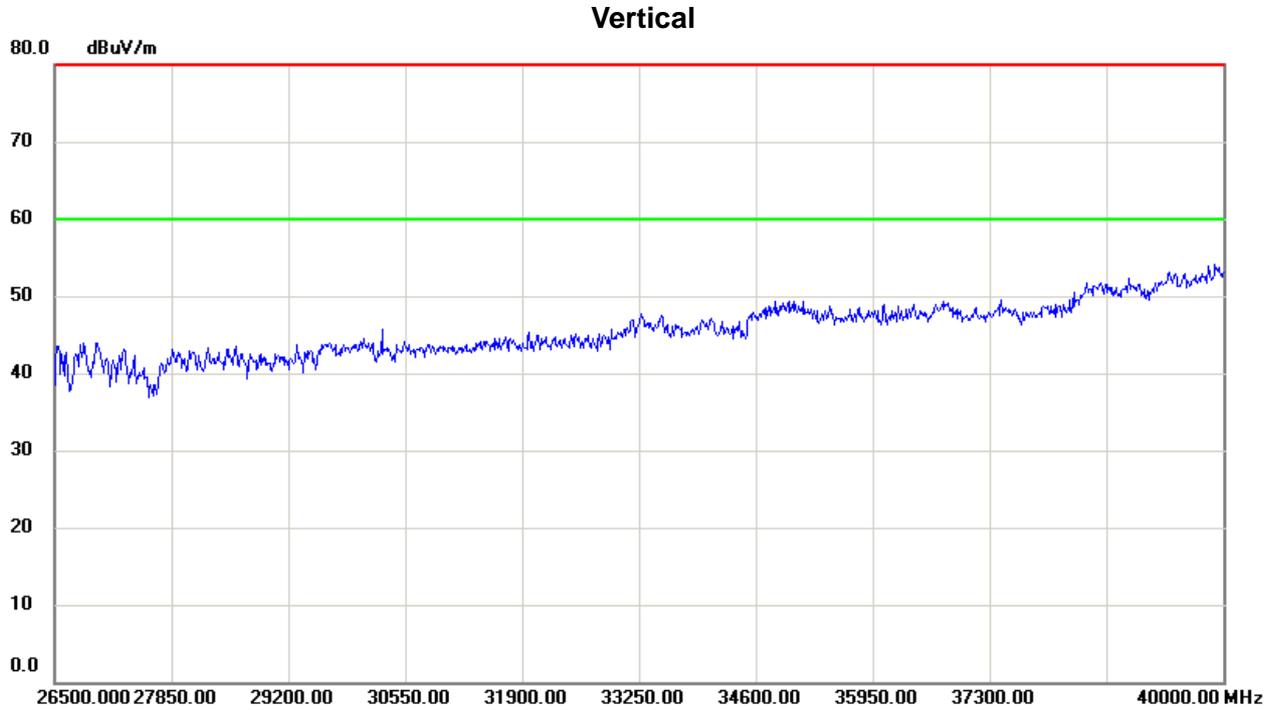

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
	26500.000							
	27850.00							
	29200.00							
	30550.00							
	31900.00							
	33250.00							
	34600.00							
	35950.00							
	37300.00							
	40000.00							

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

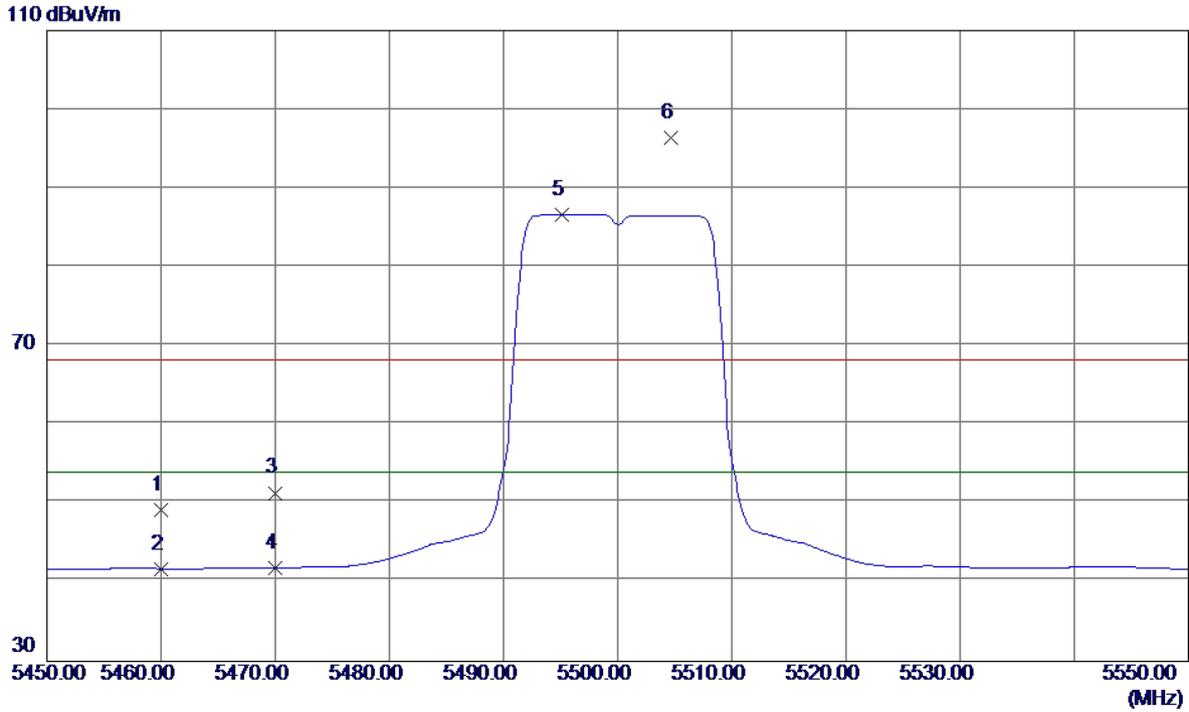


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	7.57	41.65	49.22	68.30	-19.08	Peak	
2	5460.0000	0.10	41.65	41.75	54.00	-12.25	AVG	
3	5470.0000	9.68	41.68	51.36	68.30	-16.94	Peak	
4	5470.0000	0.20	41.68	41.88	54.00	-12.12	AVG	
5 *	5495.1000	44.89	41.76	86.65	54.00	32.65	AVG	No Limit
6	5504.7000	54.53	41.80	96.33	68.30	28.03	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal


115 dBuV/m

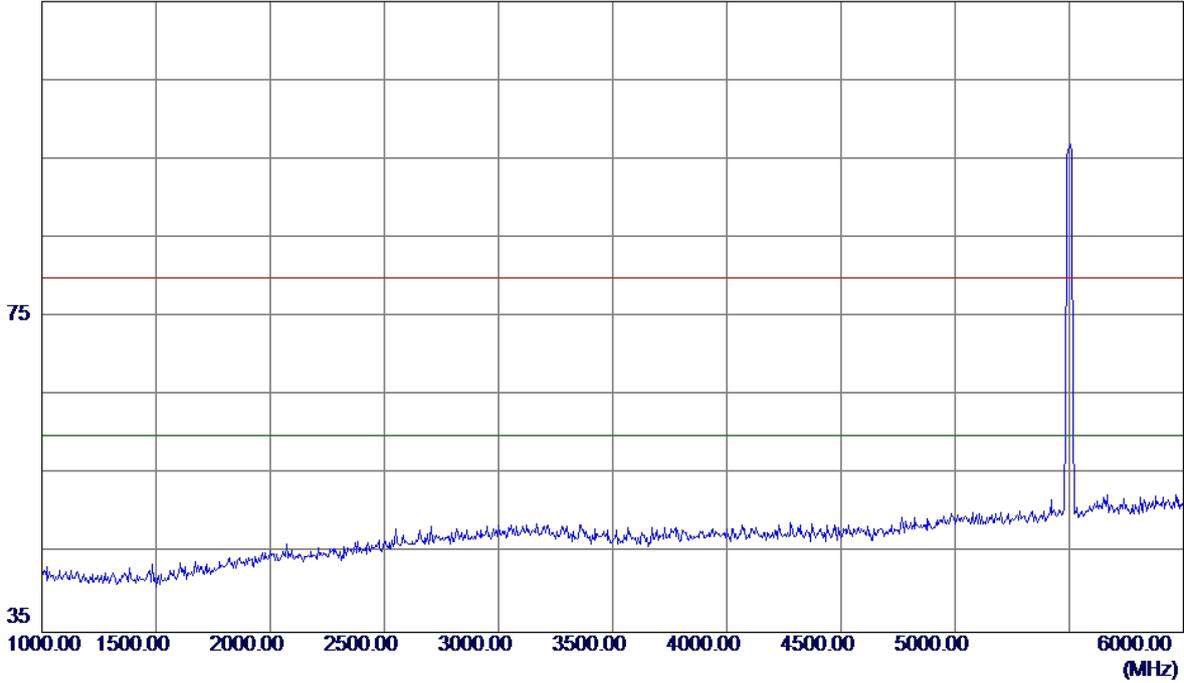

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Horizontal

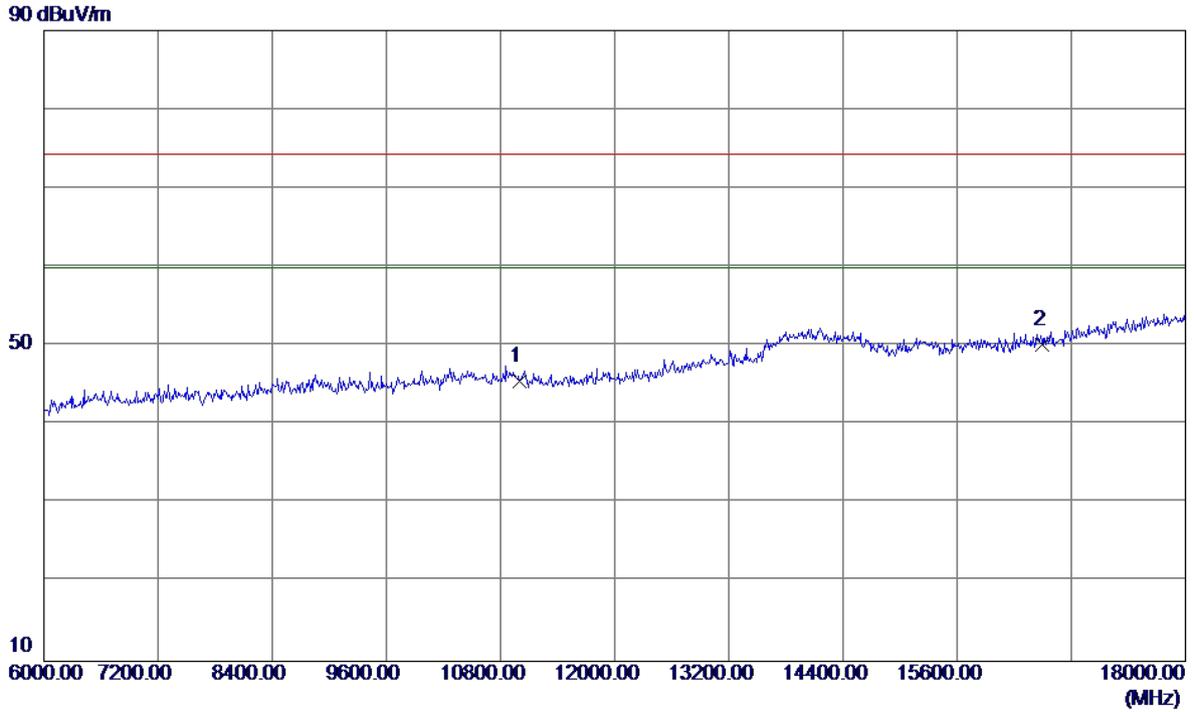

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	29.66	15.93	45.59	74.30	-28.71	Peak	
2 *	16500.0000	32.16	17.94	50.10	74.30	-24.20	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Horizontal

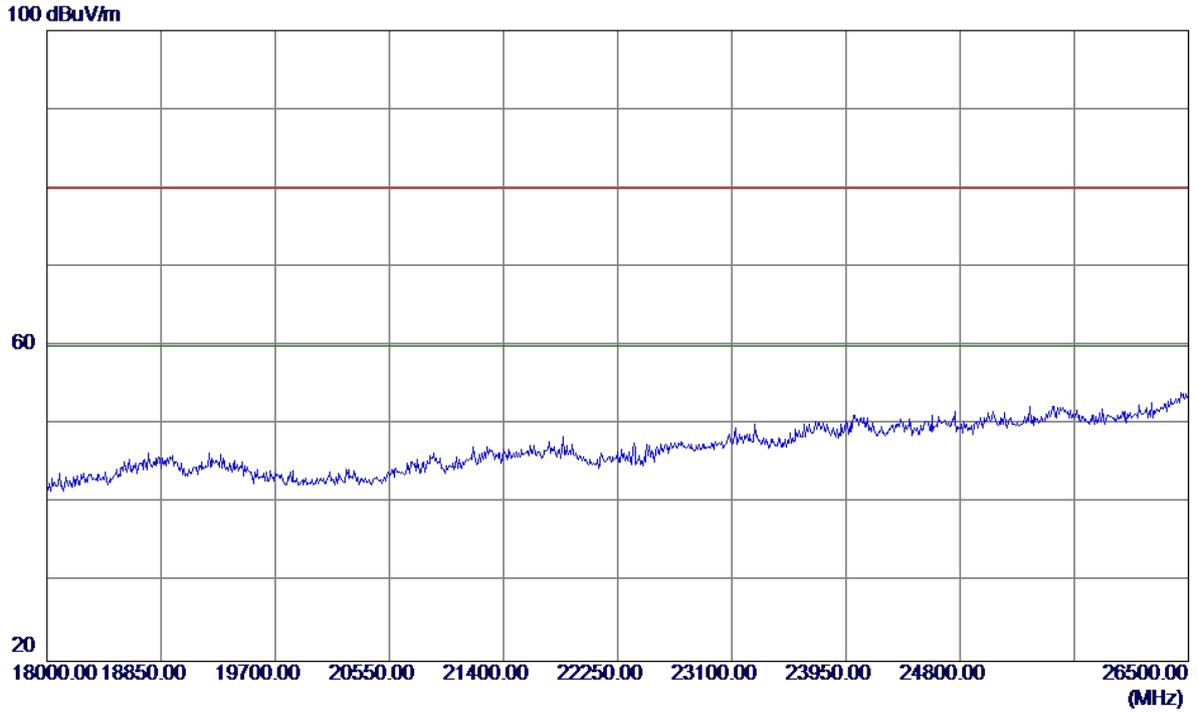

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

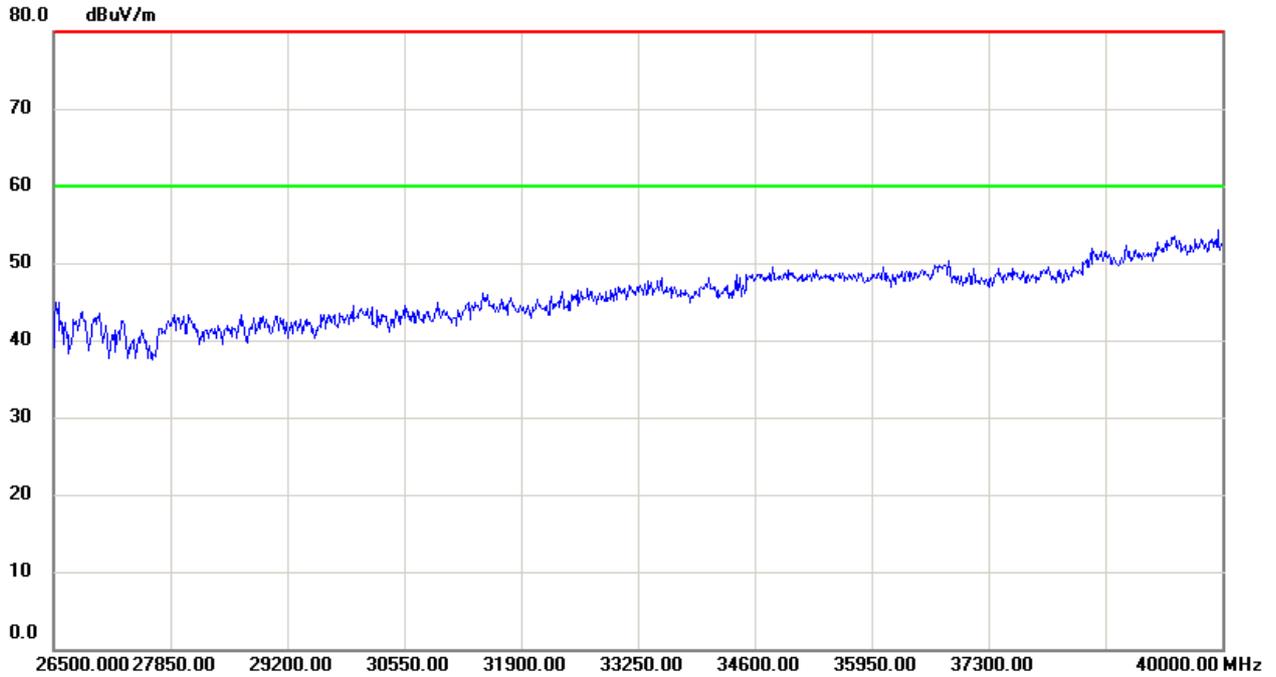


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

110 dBuV/m

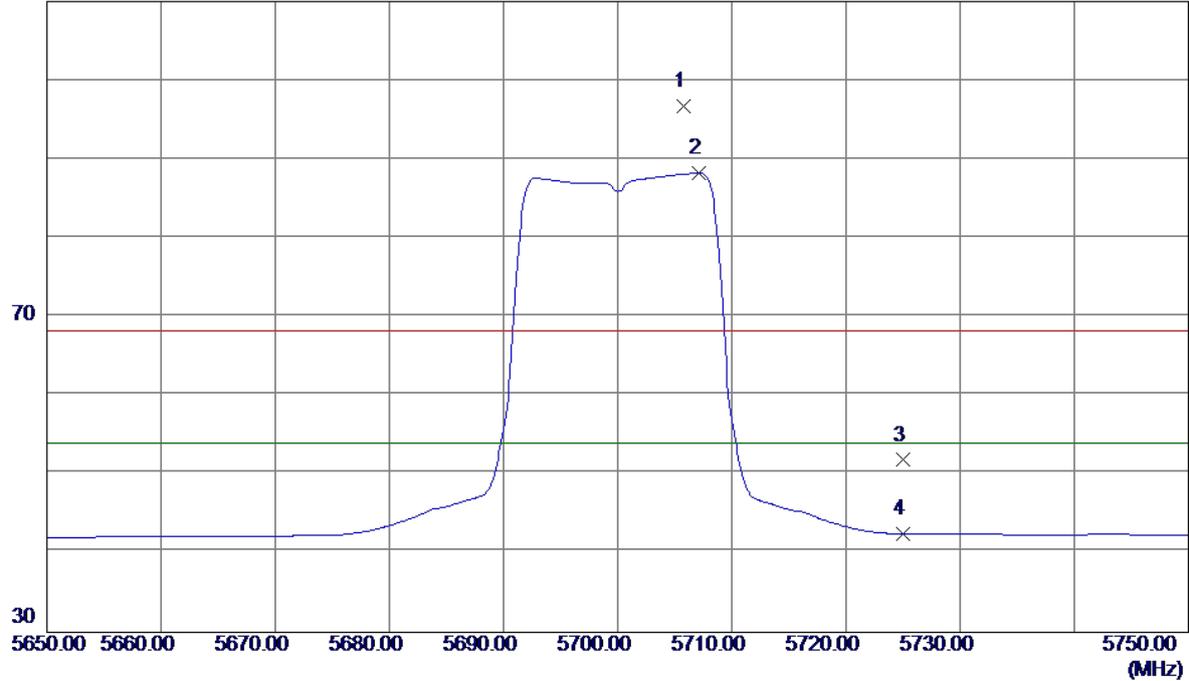


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5705.8000	54.28	42.51	96.79	68.30	28.49	Peak	No Limit
2 *	5707.1000	45.69	42.52	88.21	54.00	34.21	AVG	No Limit
3	5725.0000	9.26	42.58	51.84	68.30	-16.46	Peak	
4	5725.0000	-0.06	42.58	42.52	54.00	-11.48	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical


115 dBuV/m

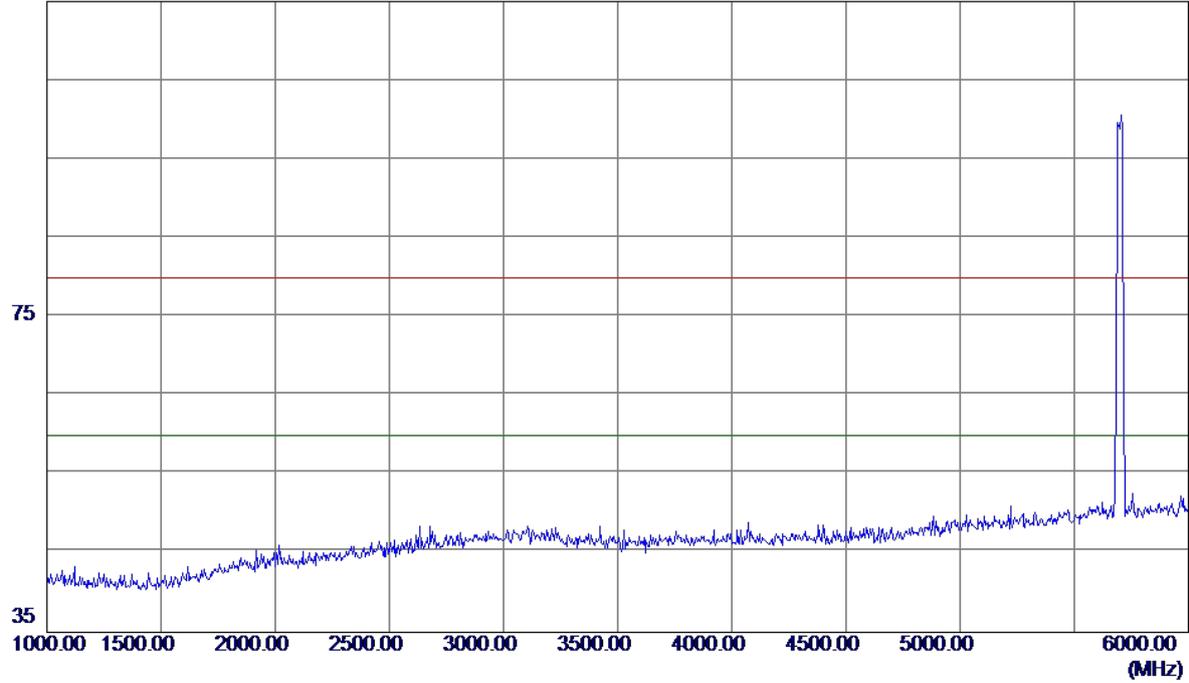

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Vertical

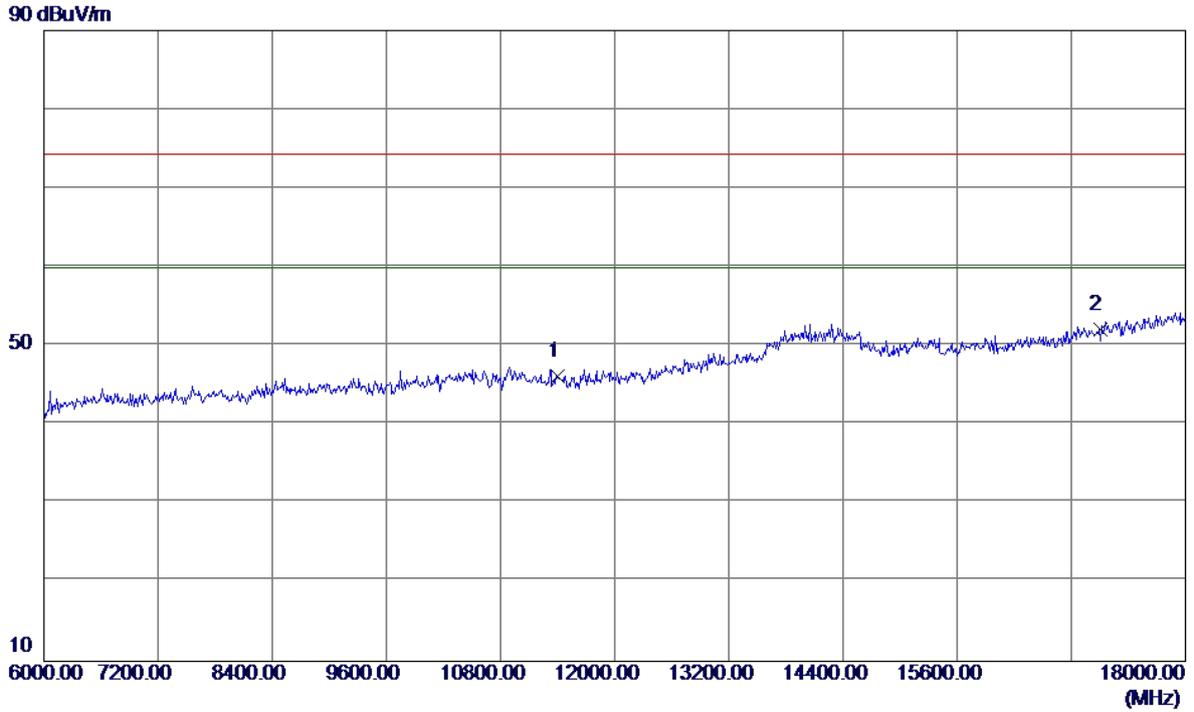

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	30.59	15.57	46.16	74.30	-28.14	Peak	
2 *	17100.0000	31.52	20.63	52.15	74.30	-22.15	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Vertical

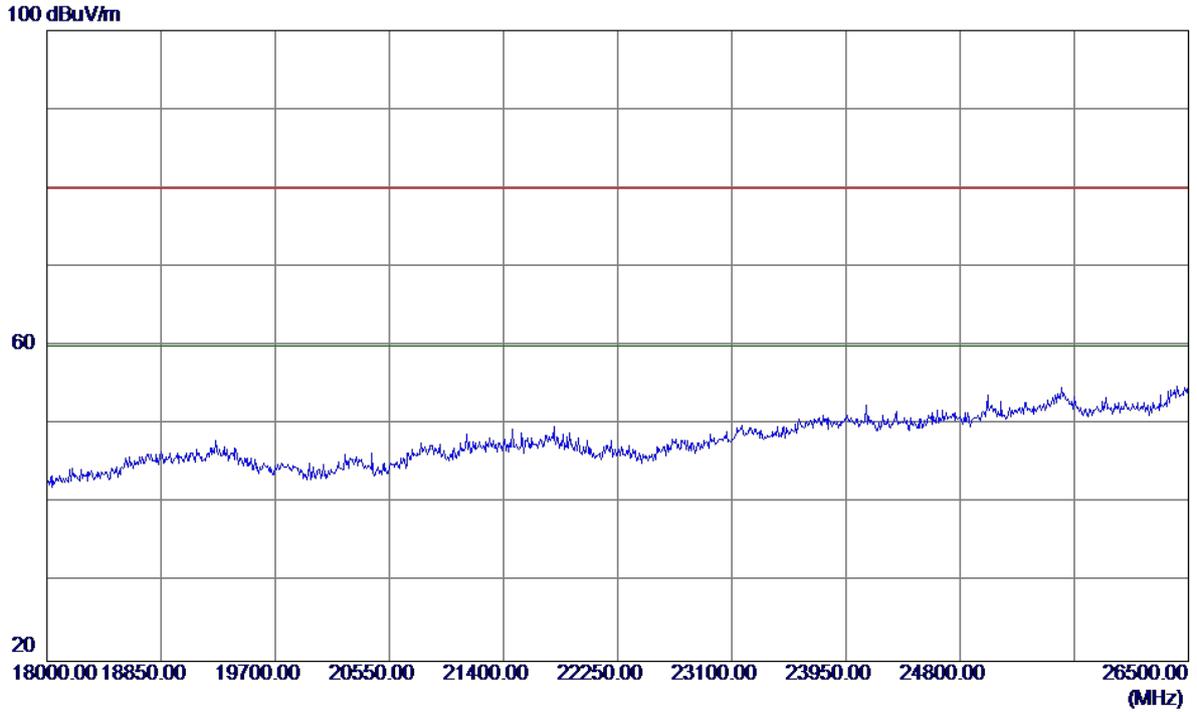

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

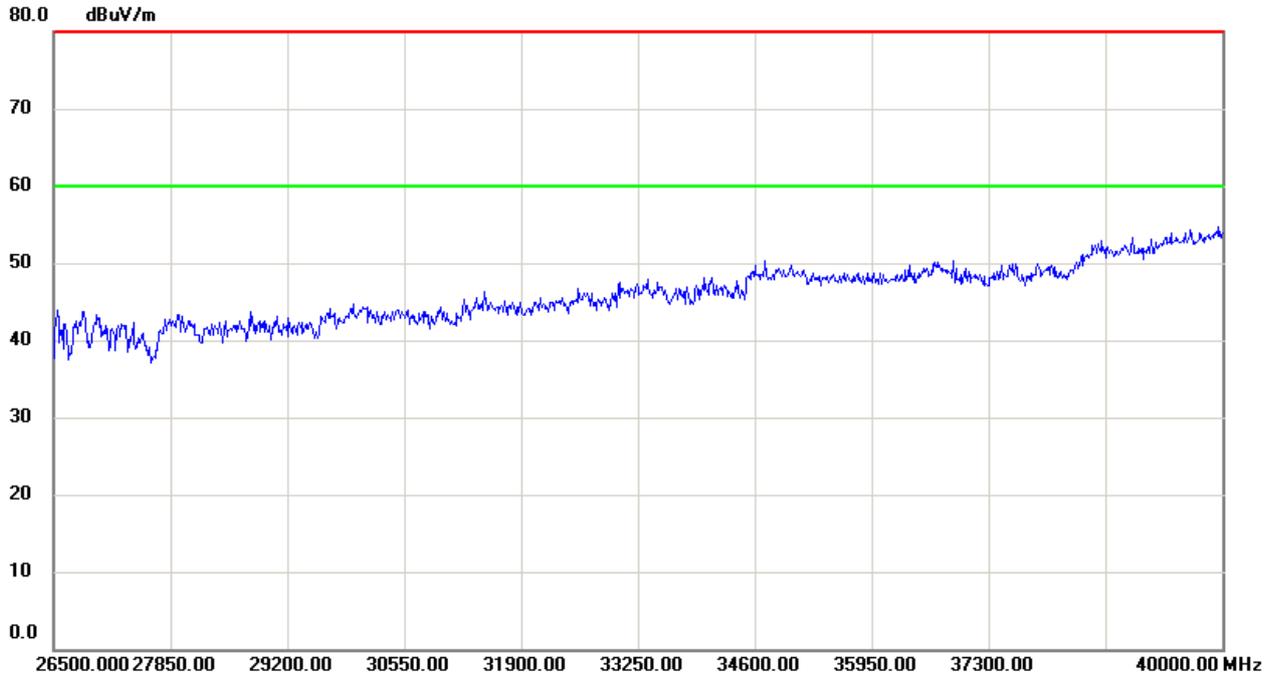


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal


110 dBuV/m

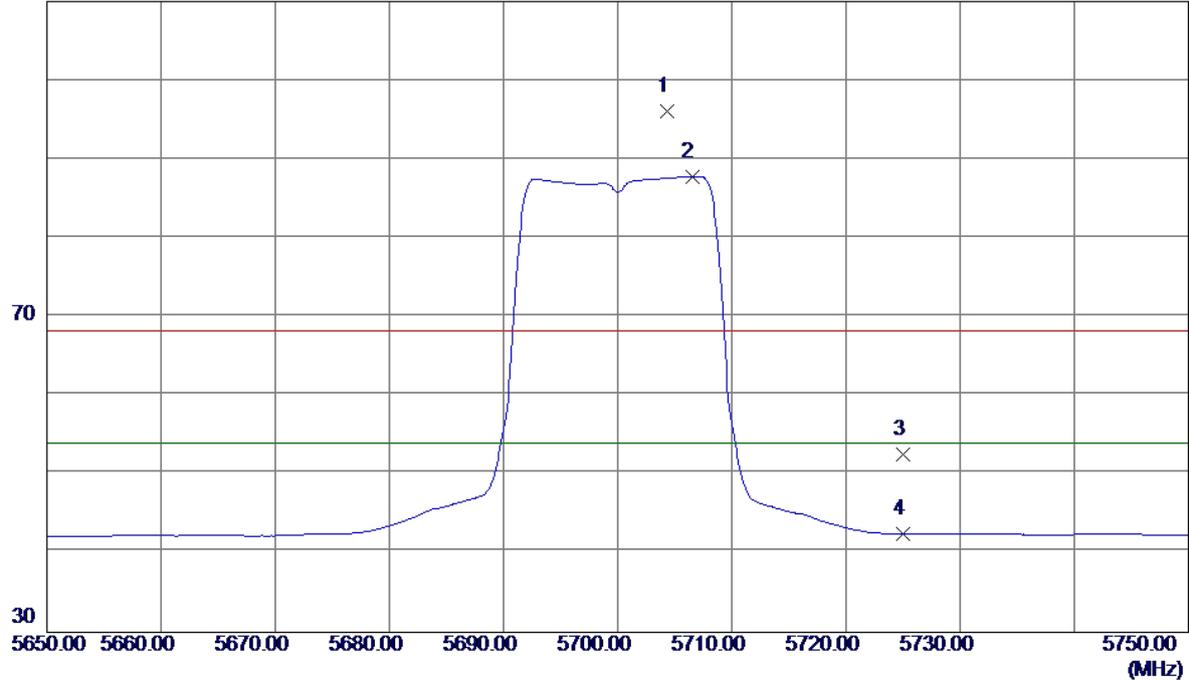

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5704.3000	53.53	42.51	96.04	68.30	27.74	Peak	No Limit
2 *	5706.5000	45.27	42.51	87.78	54.00	33.78	AVG	No Limit
3	5725.0000	9.99	42.58	52.57	68.30	-15.73	Peak	
4	5725.0000	-0.04	42.58	42.54	54.00	-11.46	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Horizontal

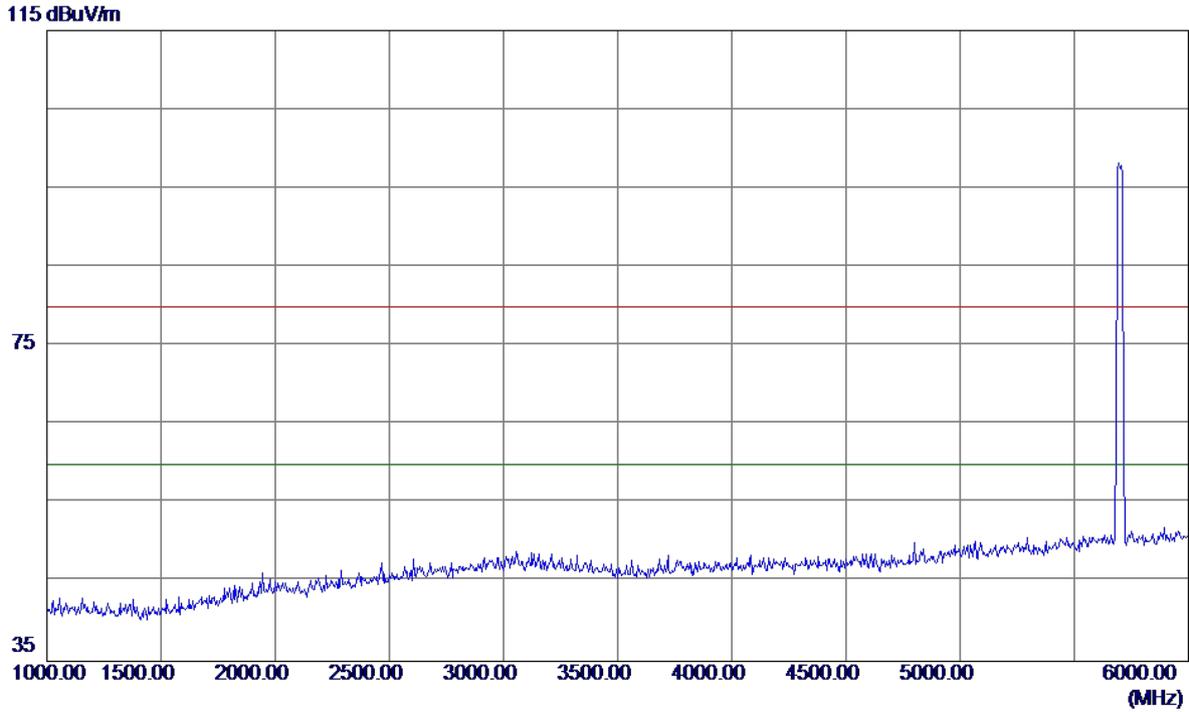

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Horizontal

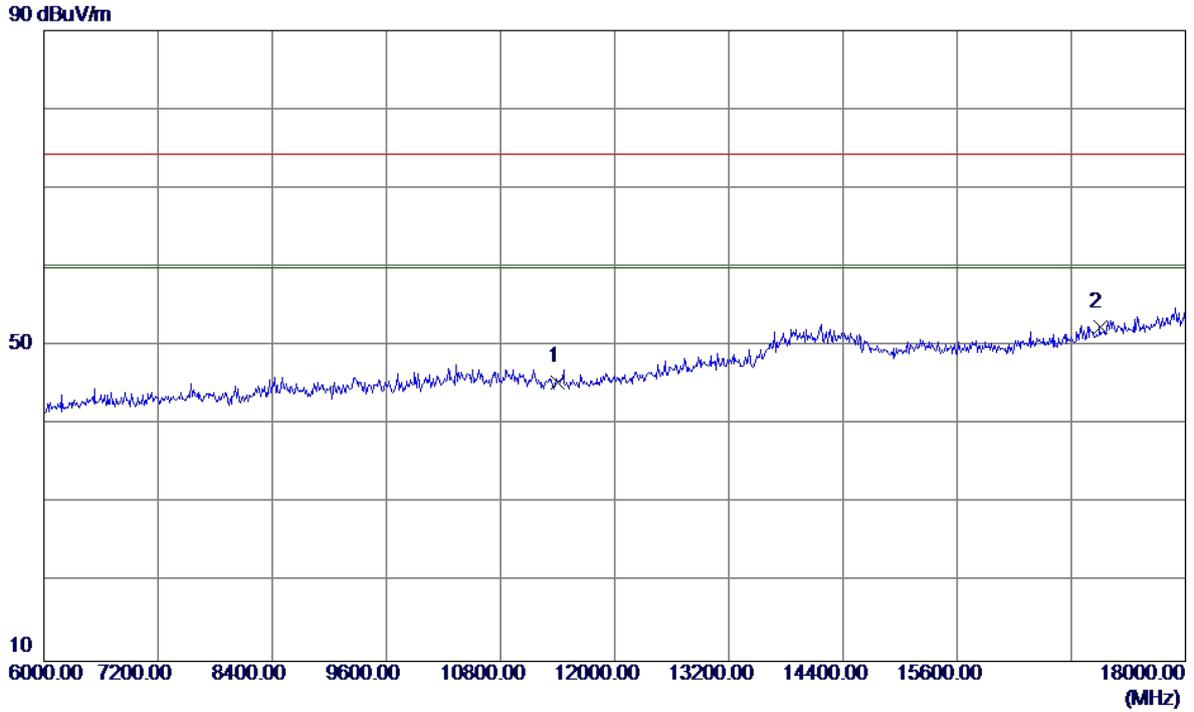

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	29.87	15.57	45.44	74.30	-28.86	Peak	
2 *	17100.0000	31.71	20.63	52.34	74.30	-21.96	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Horizontal

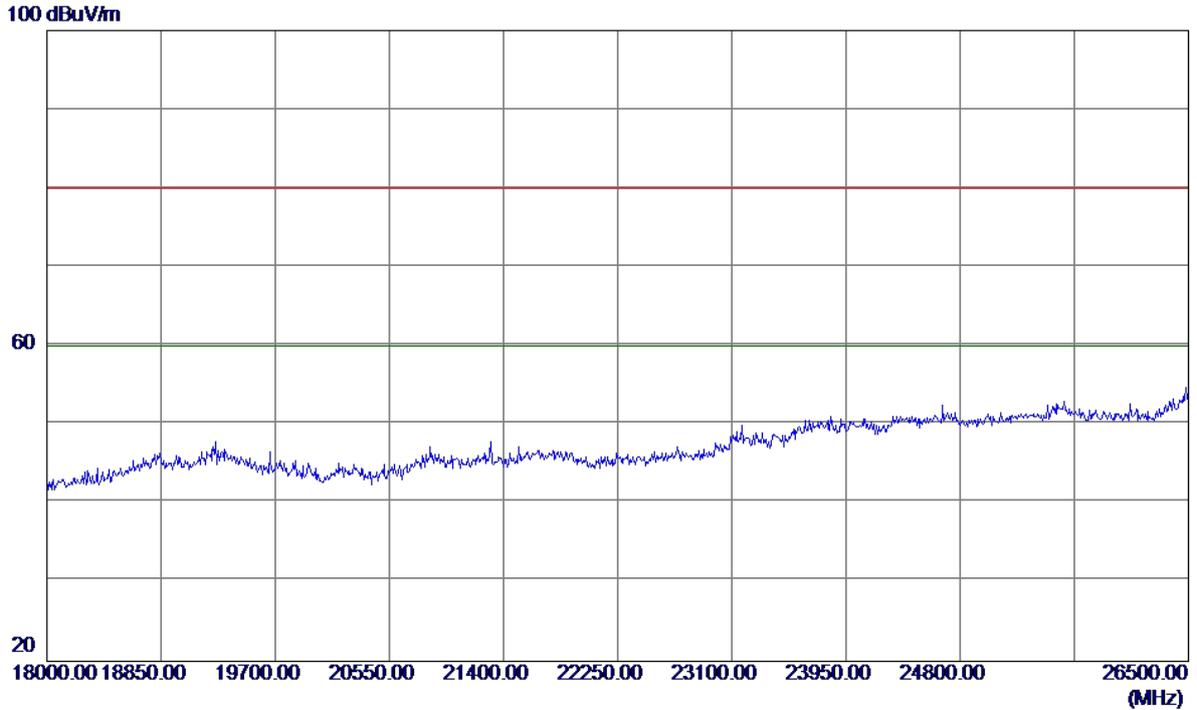

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal

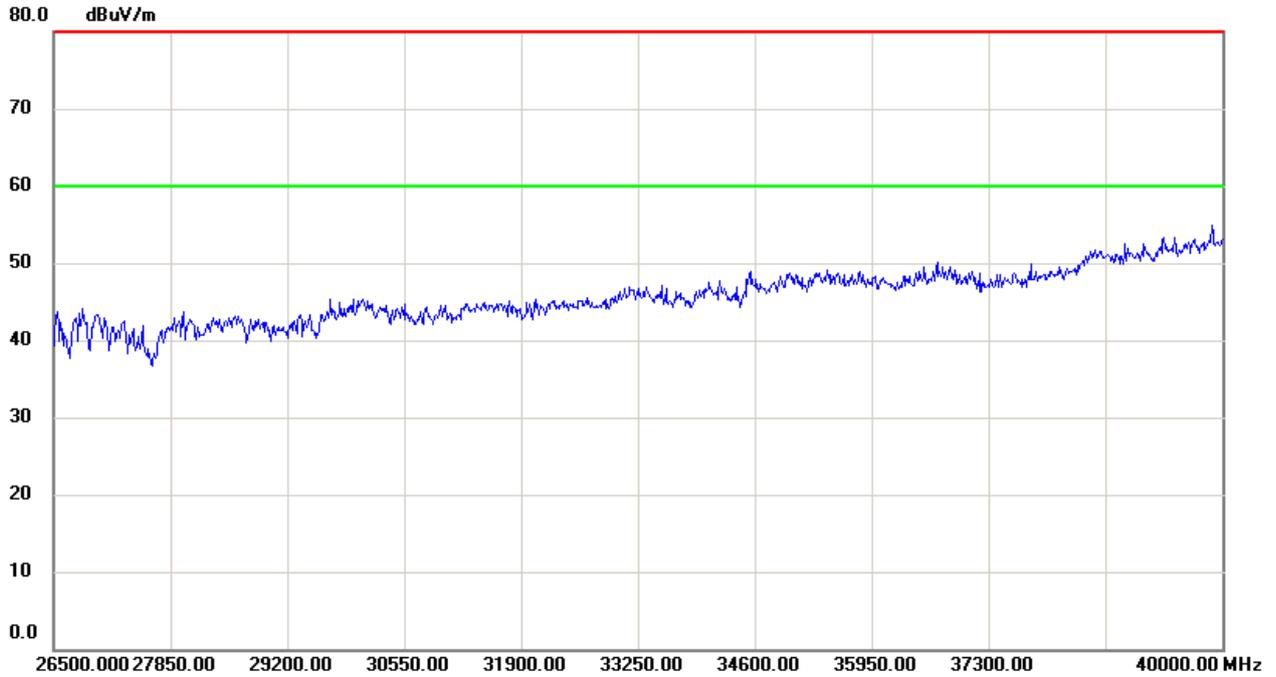


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical


110 dBuV/m

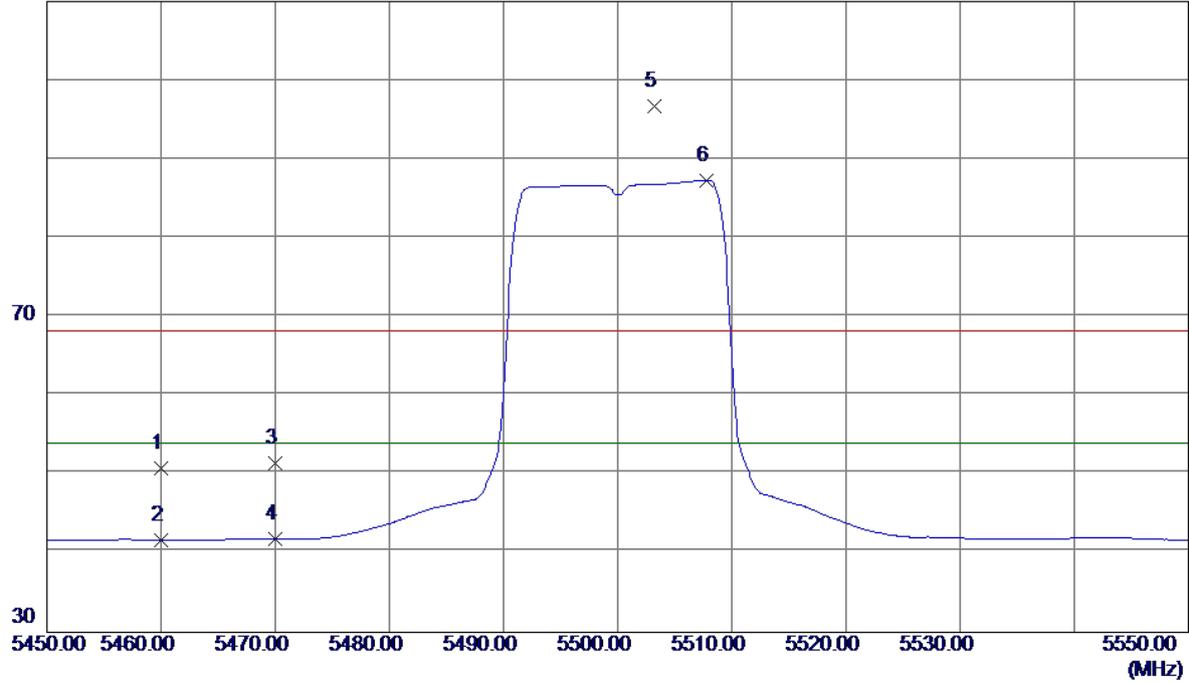

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	9.14	41.65	50.79	68.30	-17.51	Peak	
2	5460.0000	0.05	41.65	41.70	54.00	-12.30	AVG	
3	5470.0000	9.70	41.68	51.38	68.30	-16.92	Peak	
4	5470.0000	0.14	41.68	41.82	54.00	-12.18	AVG	
5	5503.2000	54.94	41.79	96.73	68.30	28.43	Peak	No Limit
6 *	5507.8000	45.53	41.81	87.34	54.00	33.34	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Vertical

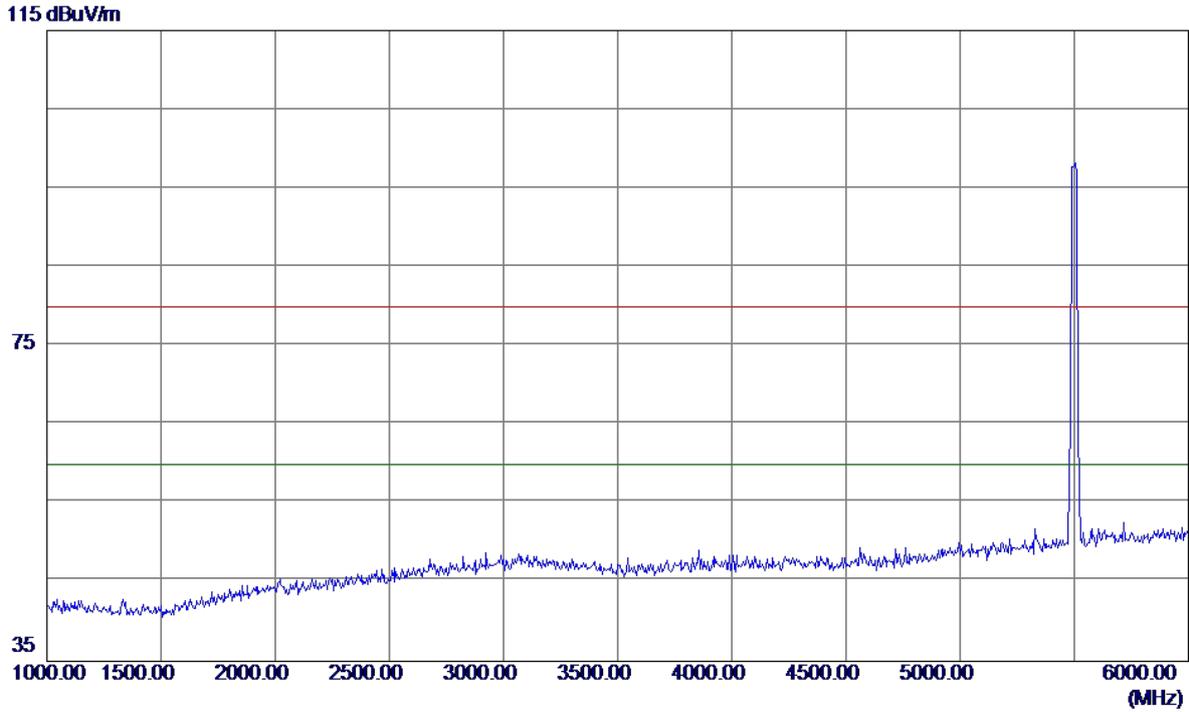

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Vertical

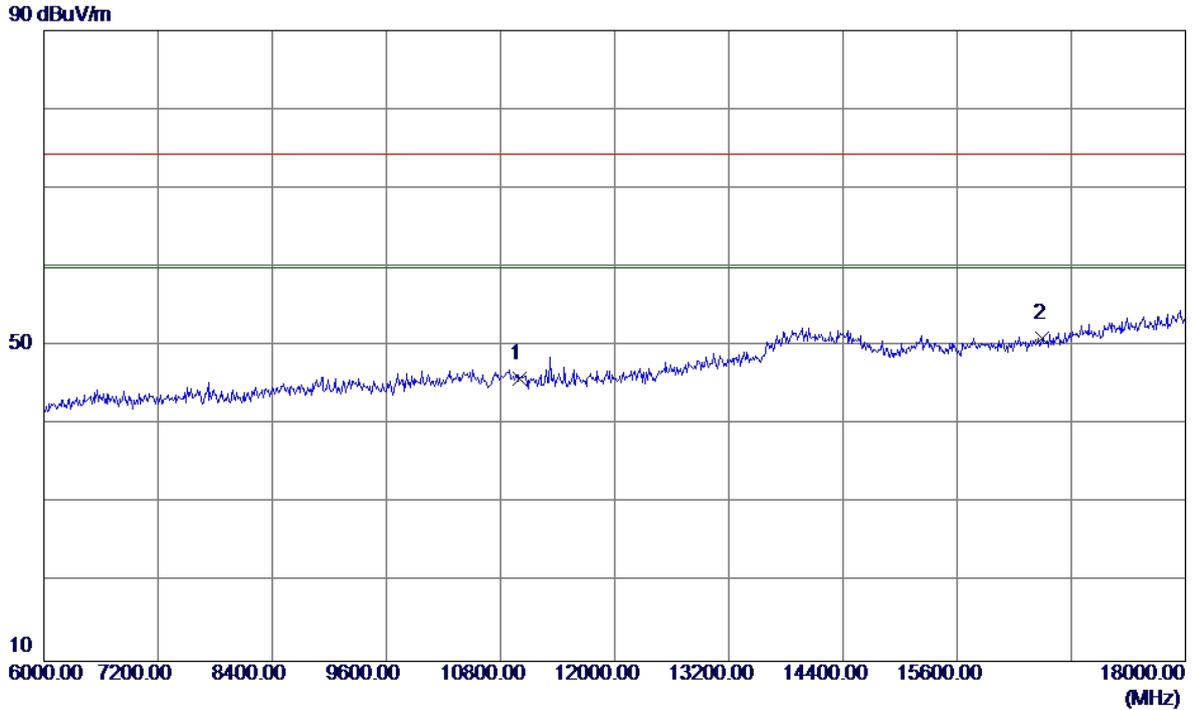

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	29.88	15.93	45.81	74.30	-28.49	Peak	
2 *	16500.0000	33.03	17.94	50.97	74.30	-23.33	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Vertical

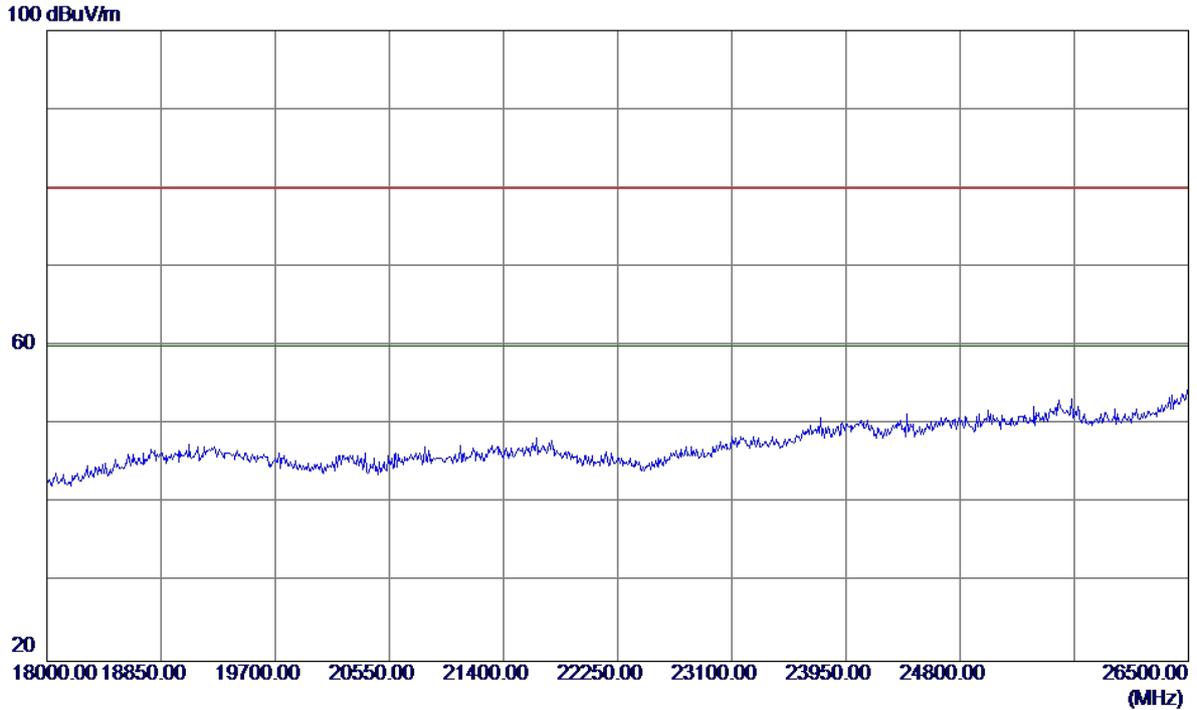

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical

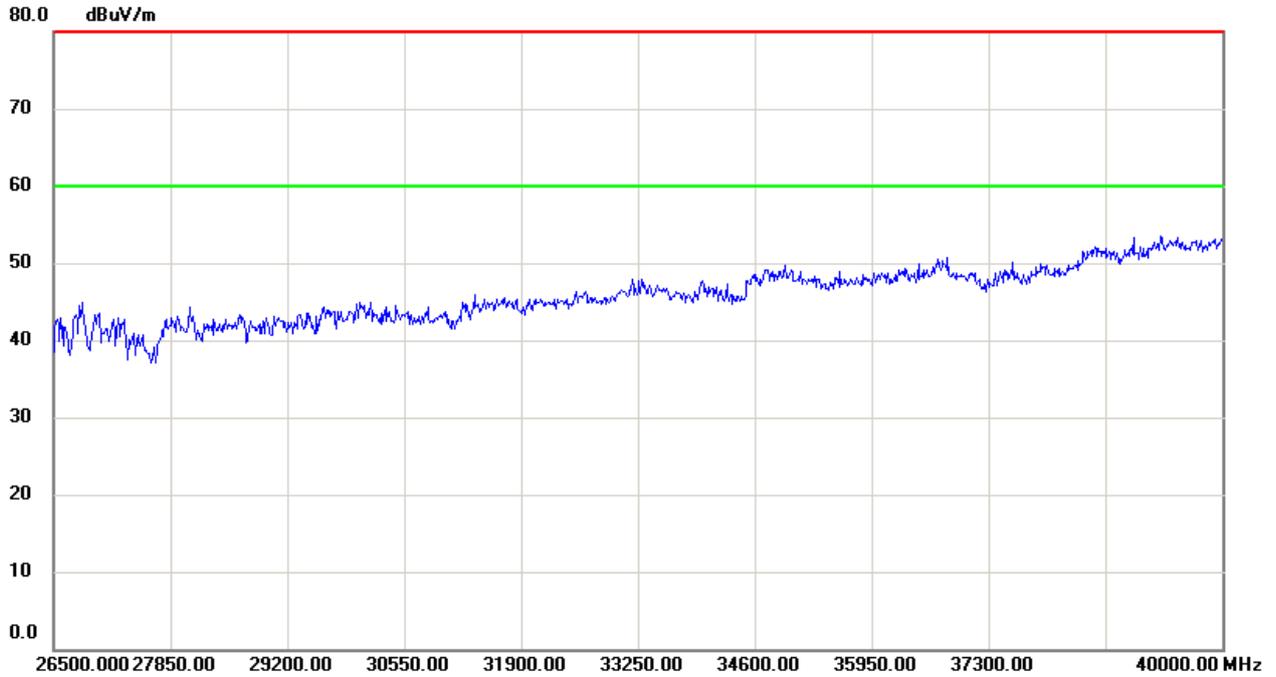


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Horizontal


110 dBuV/m

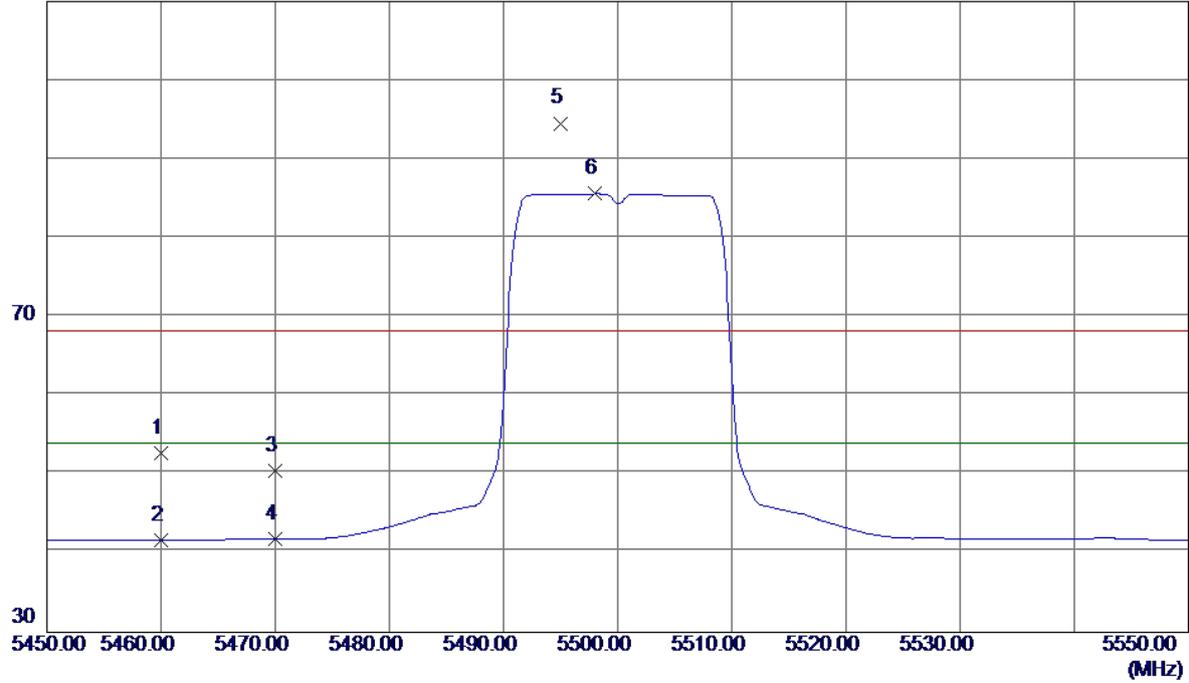

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	11.03	41.65	52.68	68.30	-15.62	Peak	
2	5460.0000	0.05	41.65	41.70	54.00	-12.30	AVG	
3	5470.0000	8.81	41.68	50.49	68.30	-17.81	Peak	
4	5470.0000	0.09	41.68	41.77	54.00	-12.23	AVG	
5	5495.0000	52.80	41.76	94.56	68.30	26.26	Peak	No Limit
6 *	5498.0000	43.84	41.77	85.61	54.00	31.61	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Horizontal

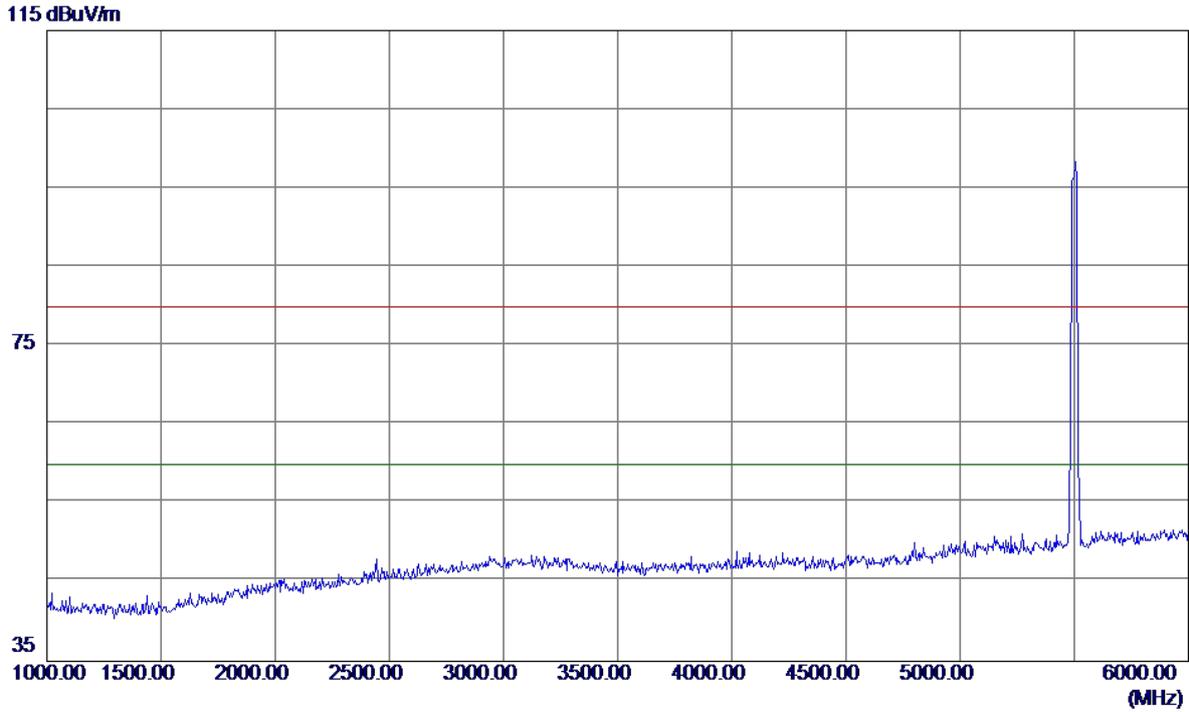

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Horizontal

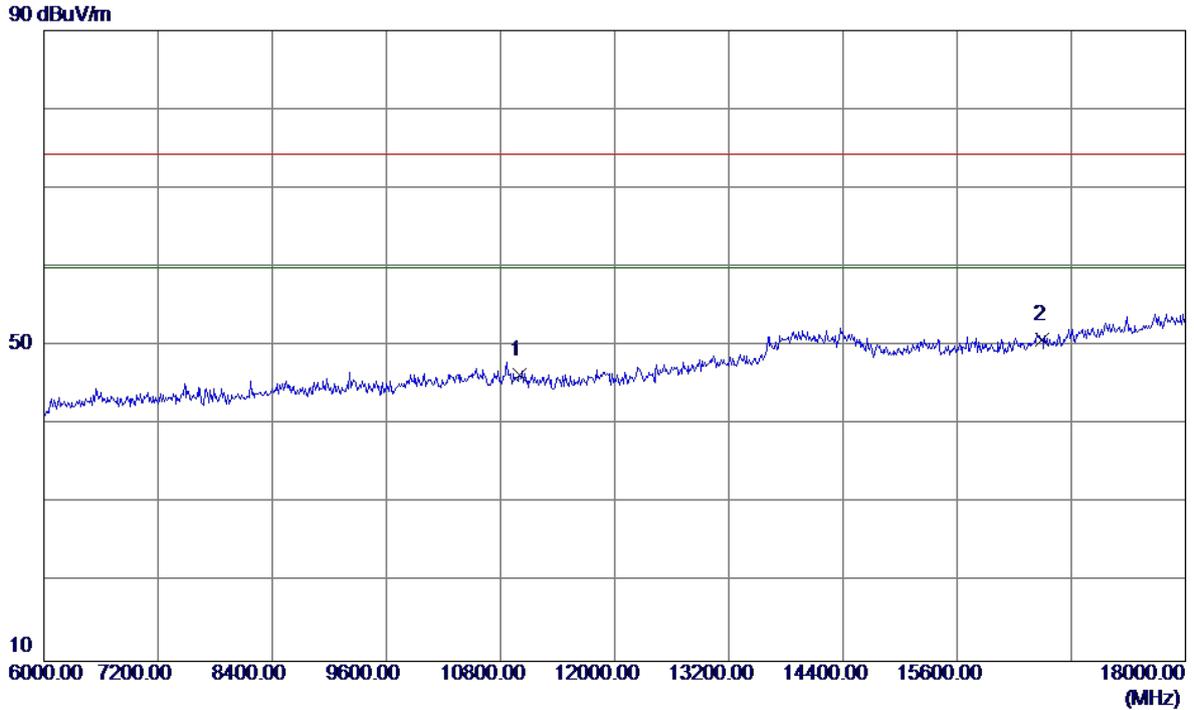

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	30.33	15.93	46.26	74.30	-28.04	Peak	
2 *	16500.0000	32.86	17.94	50.80	74.30	-23.50	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Horizontal

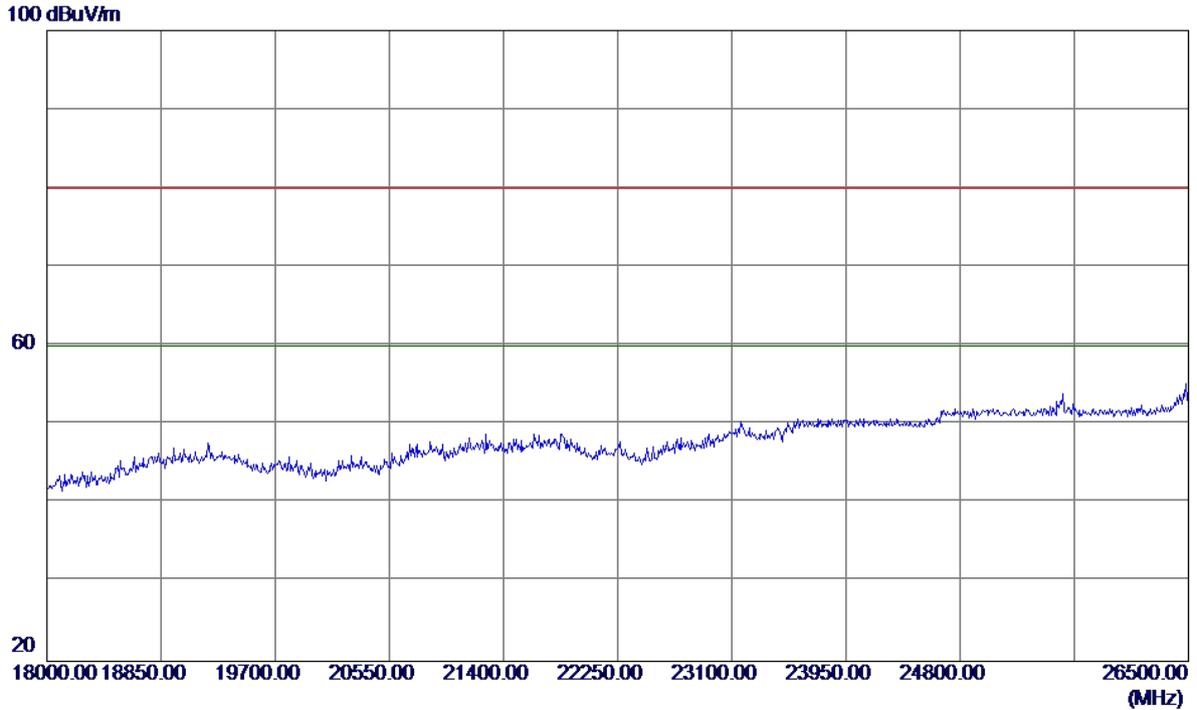

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Horizontal

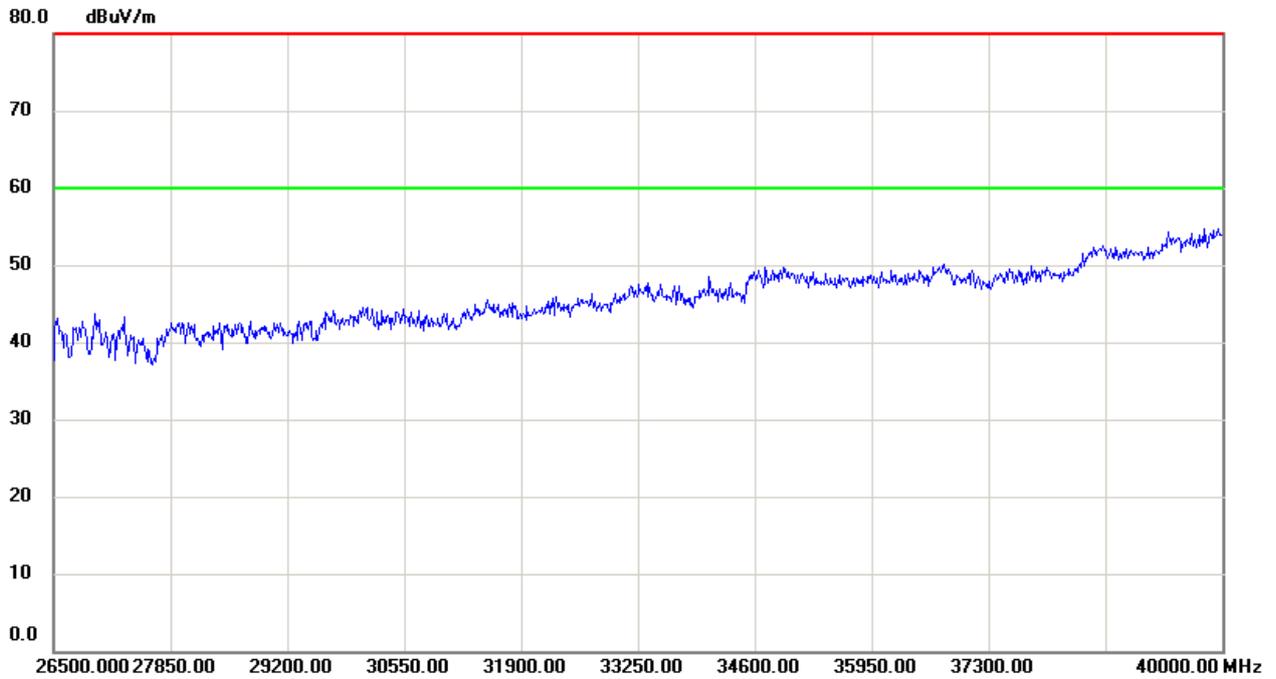


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical

110 dBuV/m

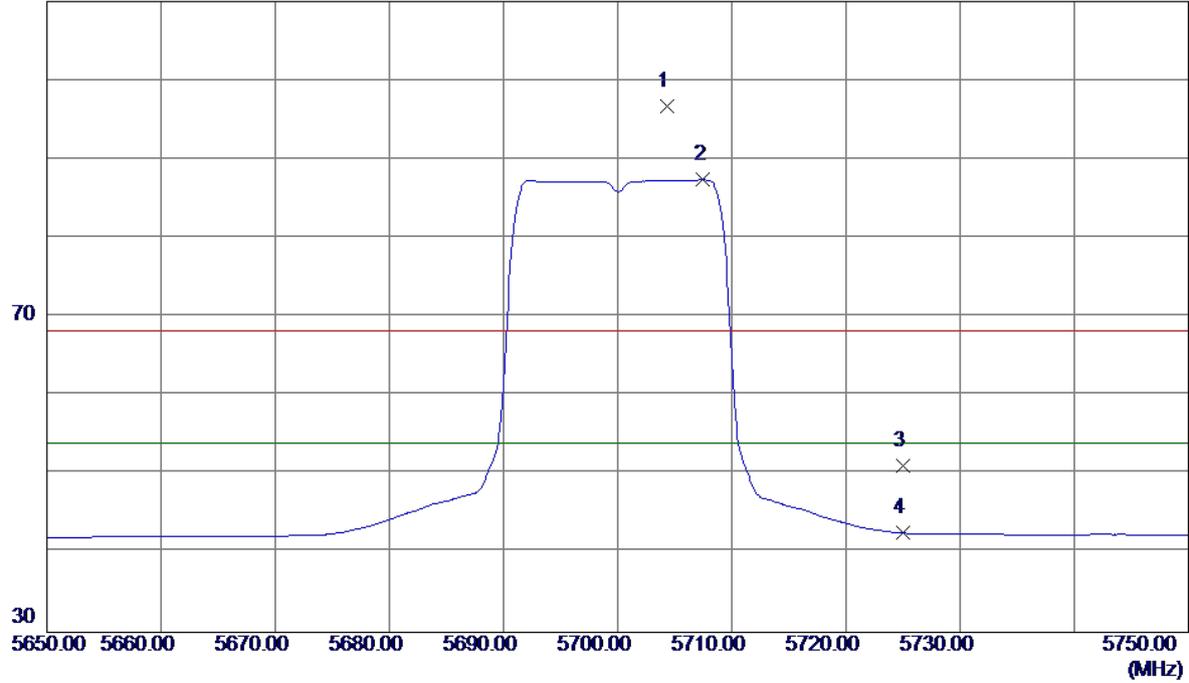


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5704.3000	54.27	42.51	96.78	68.30	28.48	Peak	No Limit
2 *	5707.5000	44.85	42.52	87.37	54.00	33.37	AVG	No Limit
3	5725.0000	8.53	42.58	51.11	68.30	-17.19	Peak	
4	5725.0000	0.01	42.58	42.59	54.00	-11.41	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical


115 dBuV/m

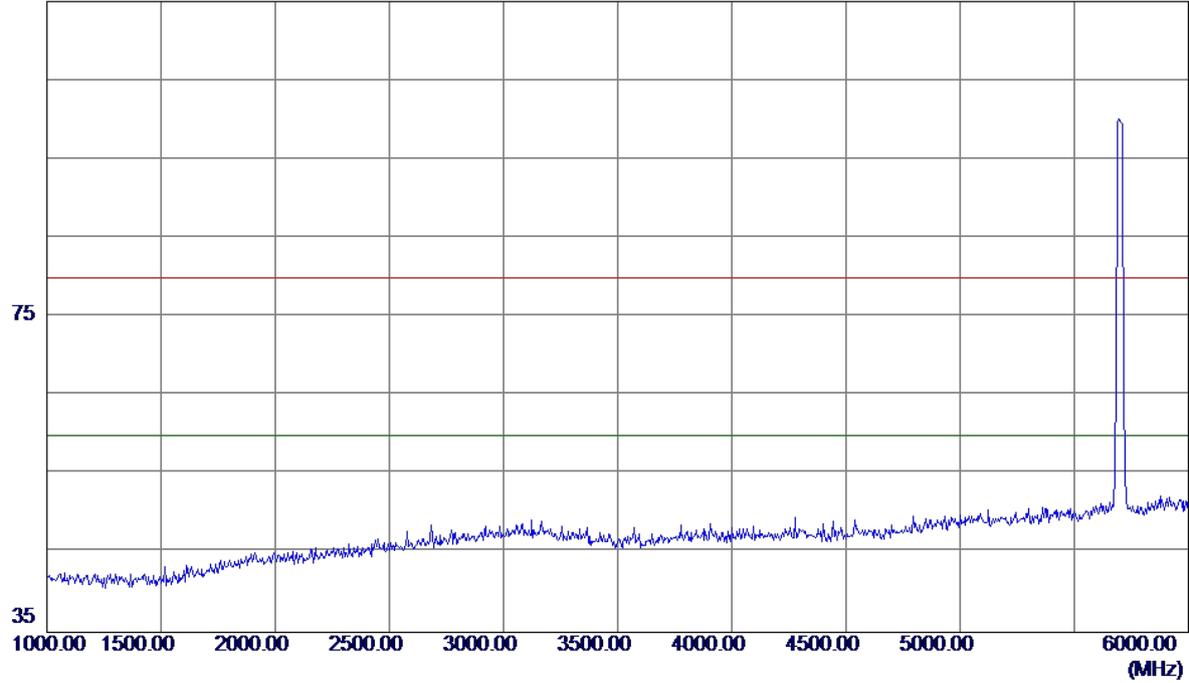

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Vertical

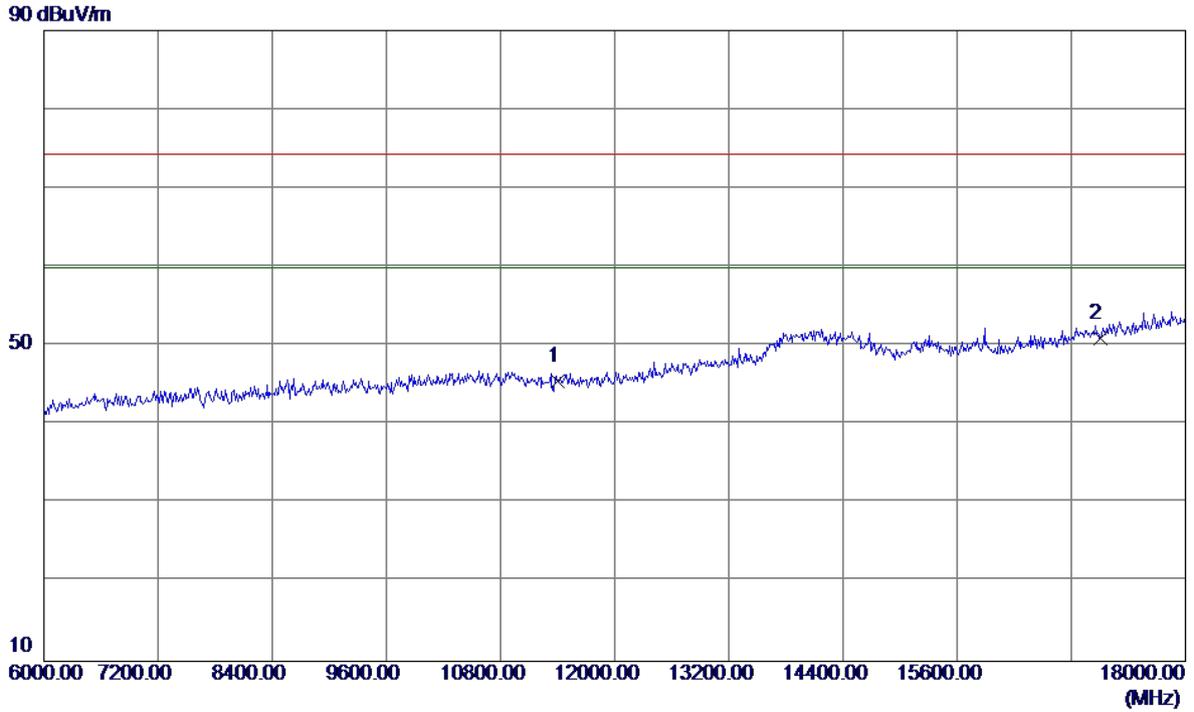

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	29.95	15.57	45.52	74.30	-28.78	Peak	
2 *	17100.0000	30.37	20.63	51.00	74.30	-23.30	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Vertical

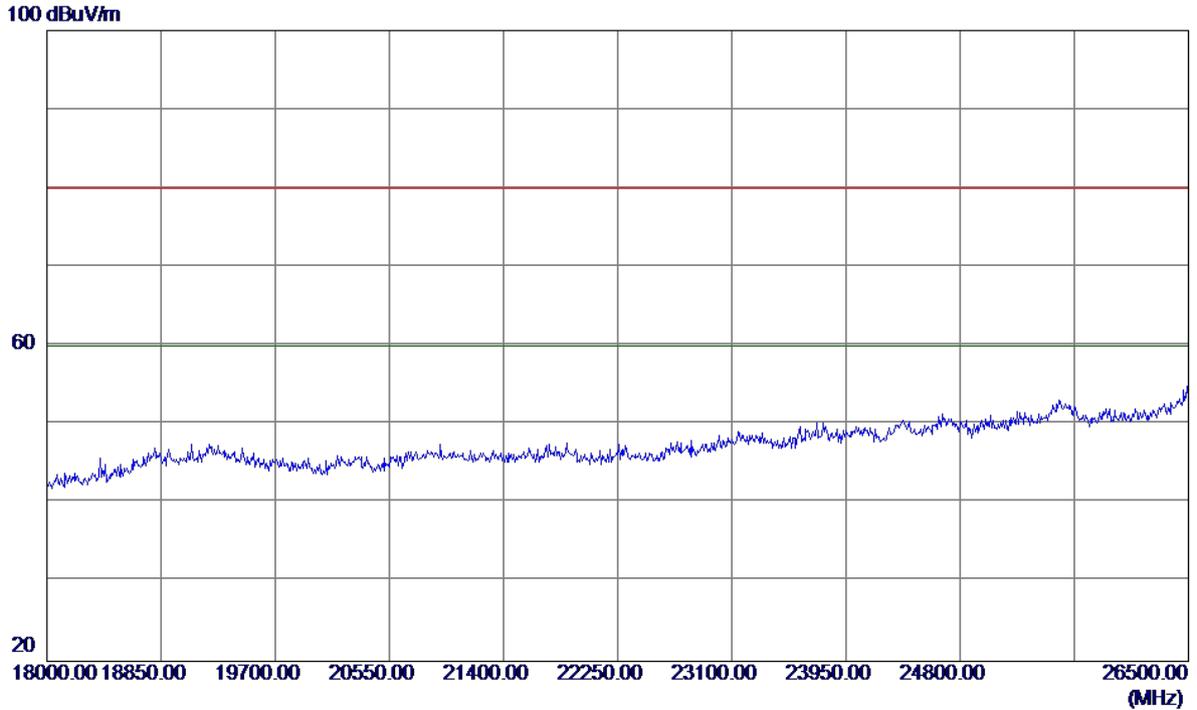

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical

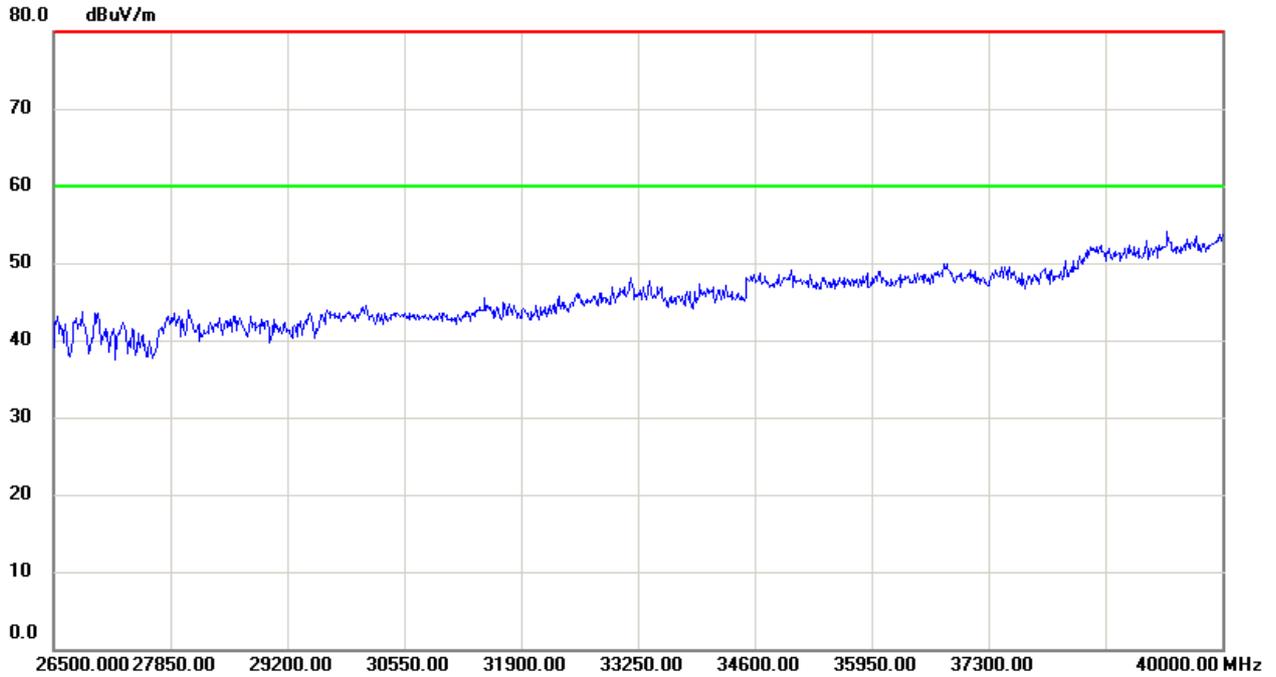


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal


110 dBuV/m

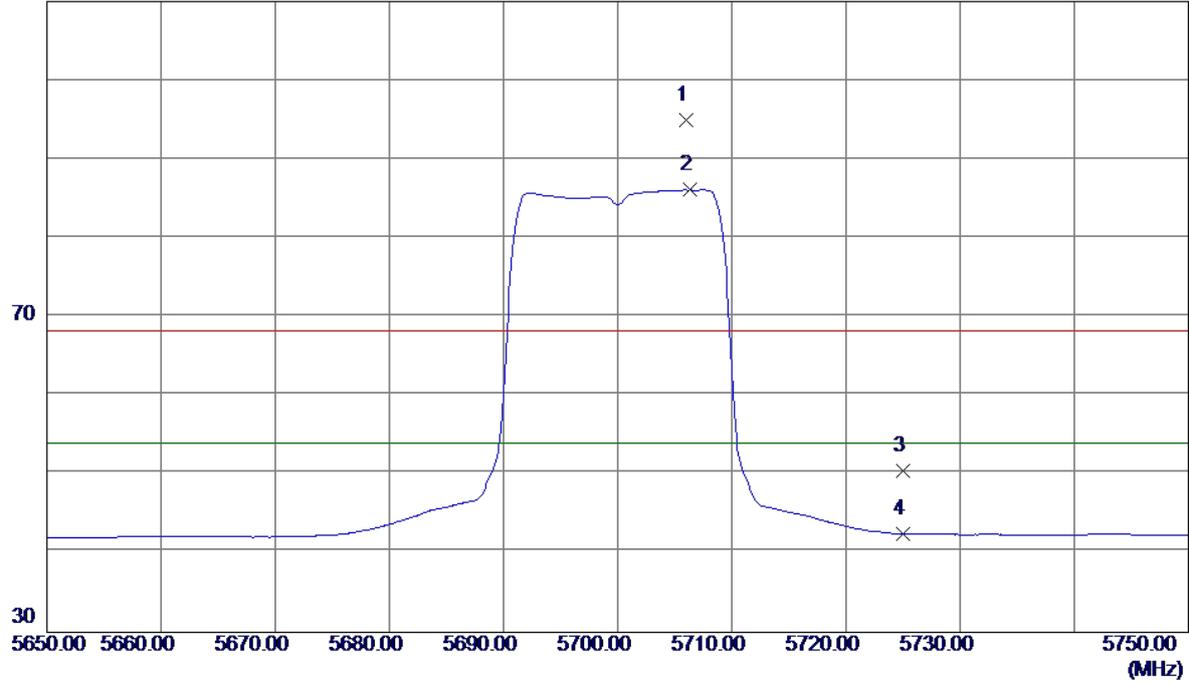

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5706.0000	52.40	42.51	94.91	68.30	26.61	Peak	No Limit
2 *	5706.3000	43.58	42.51	86.09	54.00	32.09	AVG	No Limit
3	5725.0000	7.97	42.58	50.55	68.30	-17.75	Peak	
4	5725.0000	-0.09	42.58	42.49	54.00	-11.51	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Horizontal

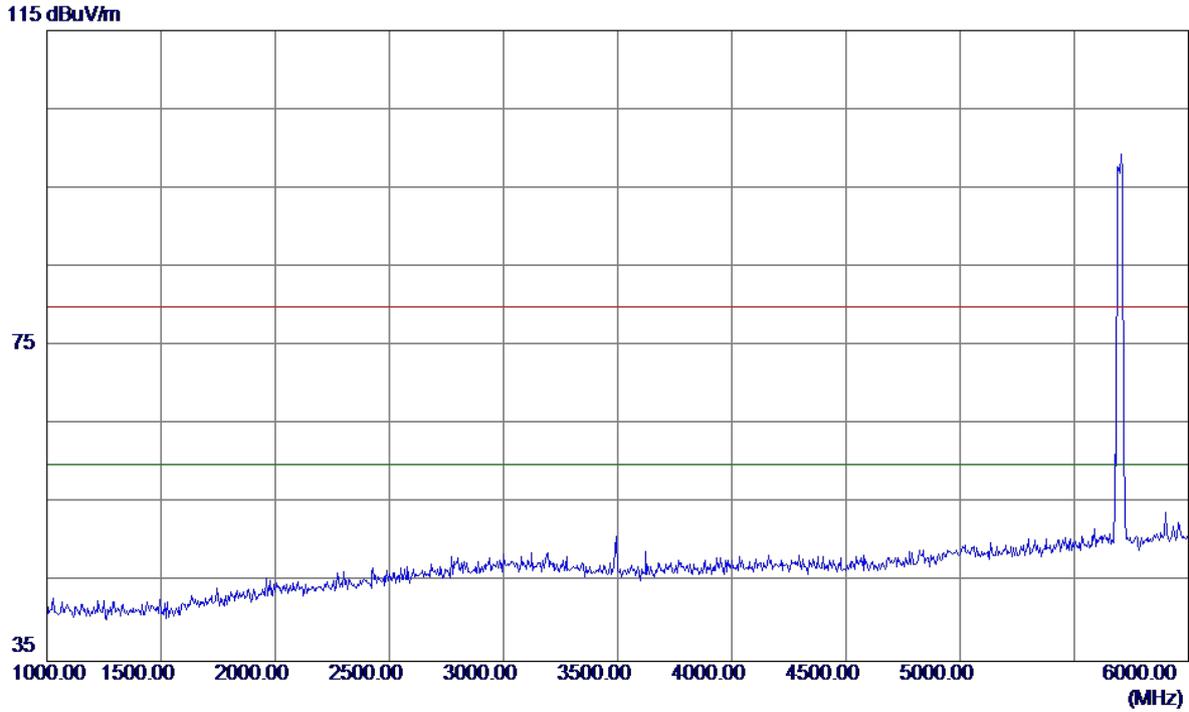

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Horizontal

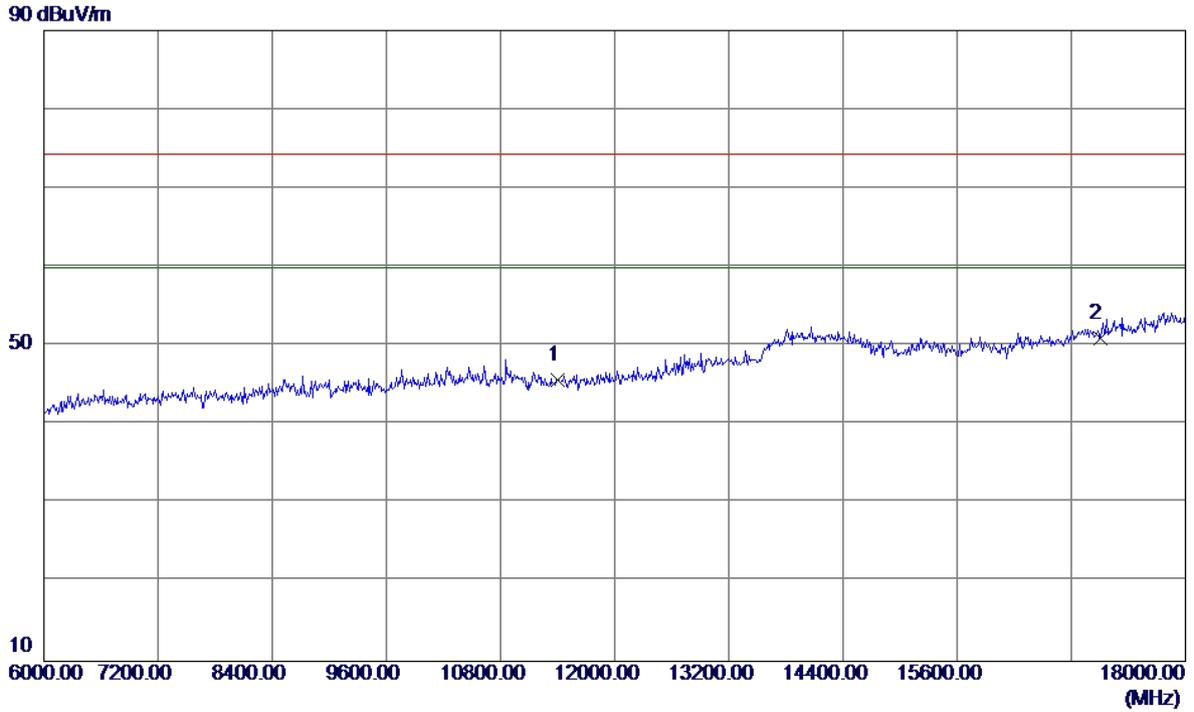

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	30.09	15.57	45.66	74.30	-28.64	Peak	
2 *	17100.0000	30.35	20.63	50.98	74.30	-23.32	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Horizontal

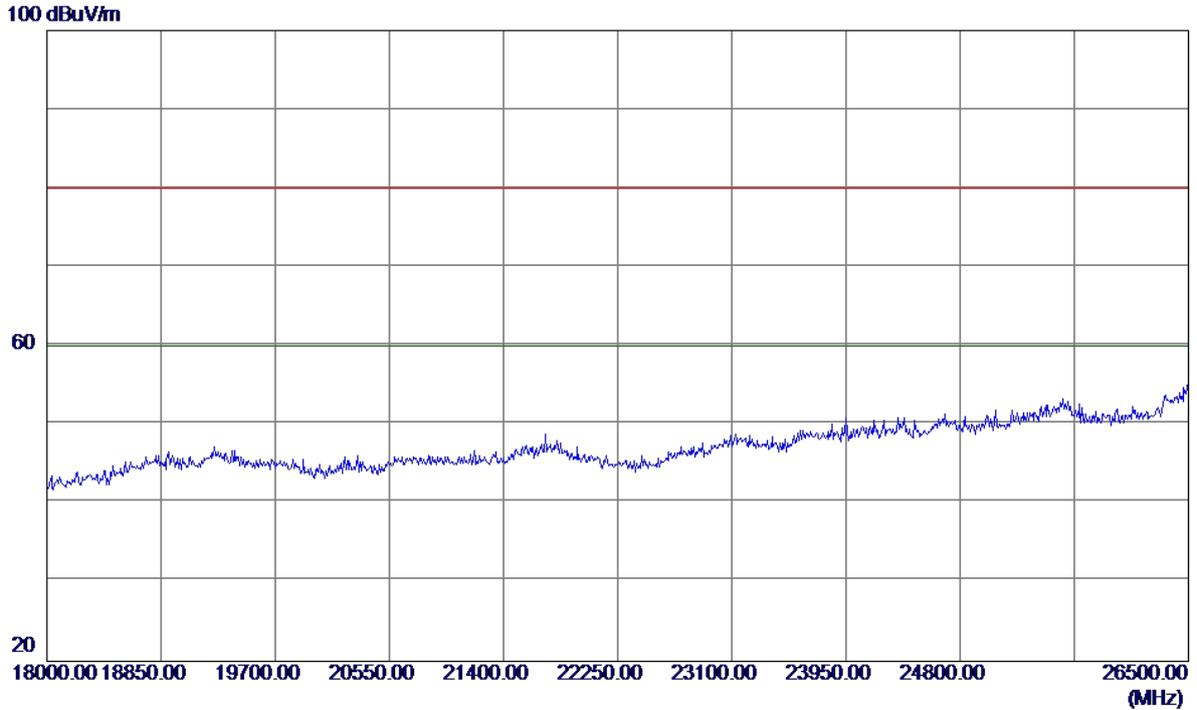

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal

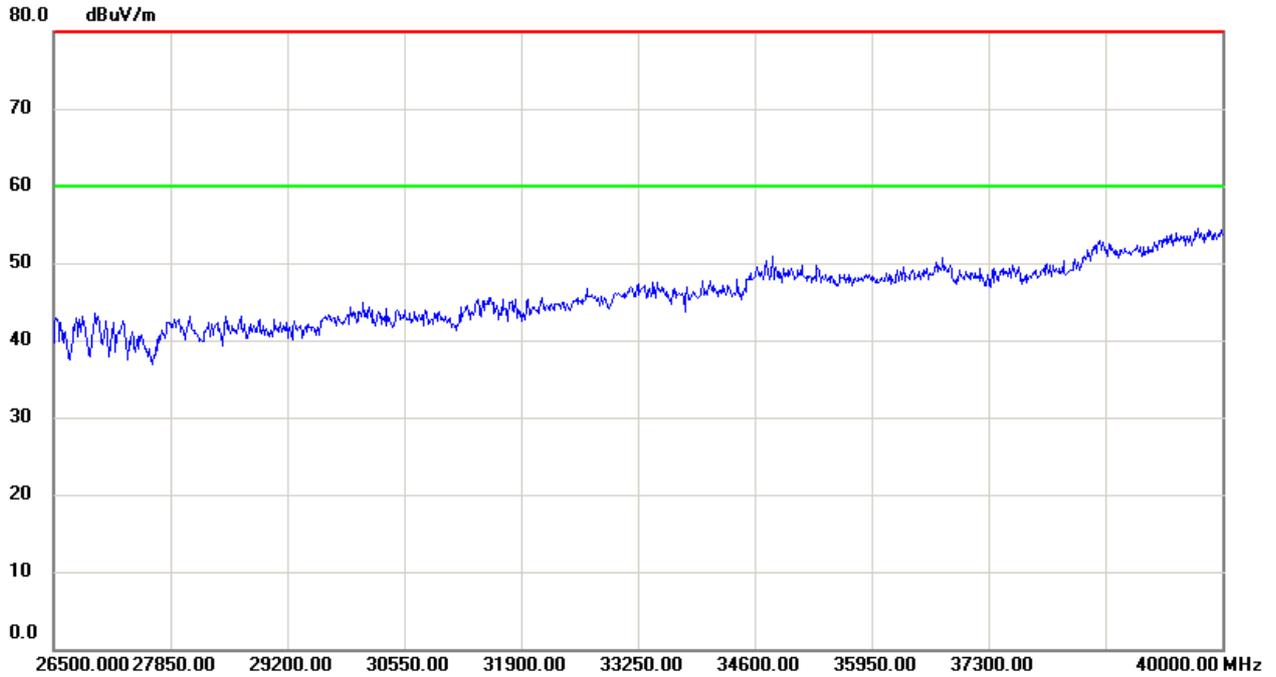


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

110 dBuV/m

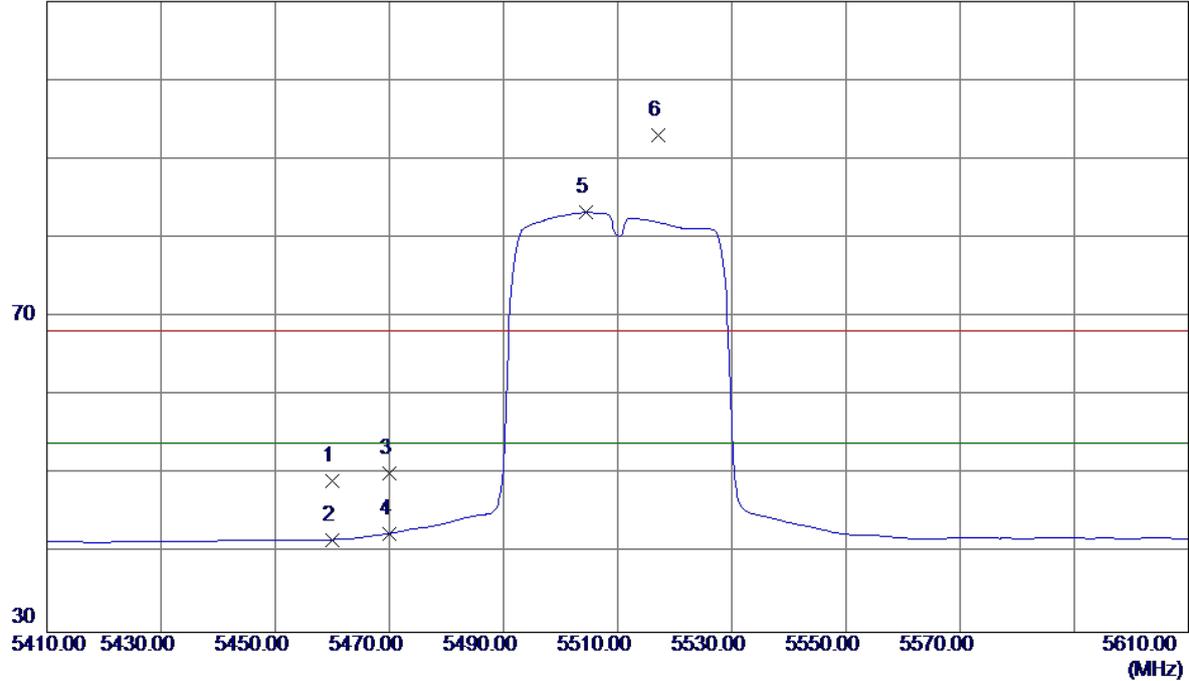


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	7.50	41.65	49.15	68.30	-19.15	Peak	
2	5460.0000	0.11	41.65	41.76	54.00	-12.24	AVG	
3	5470.0000	8.42	41.68	50.10	68.30	-18.20	Peak	
4	5470.0000	0.84	41.68	42.52	54.00	-11.48	AVG	
5 *	5504.4000	41.42	41.80	83.22	54.00	29.22	AVG	No Limit
6	5517.2000	51.13	41.84	92.97	68.30	24.67	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical


115 dBuV/m

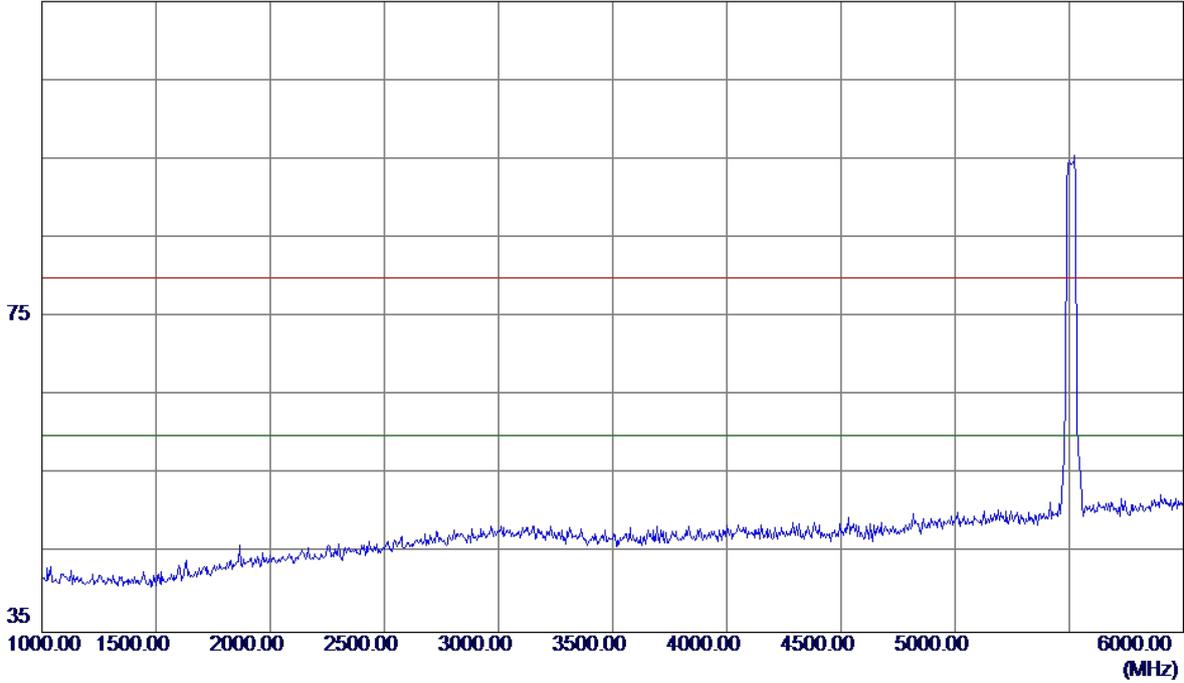

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

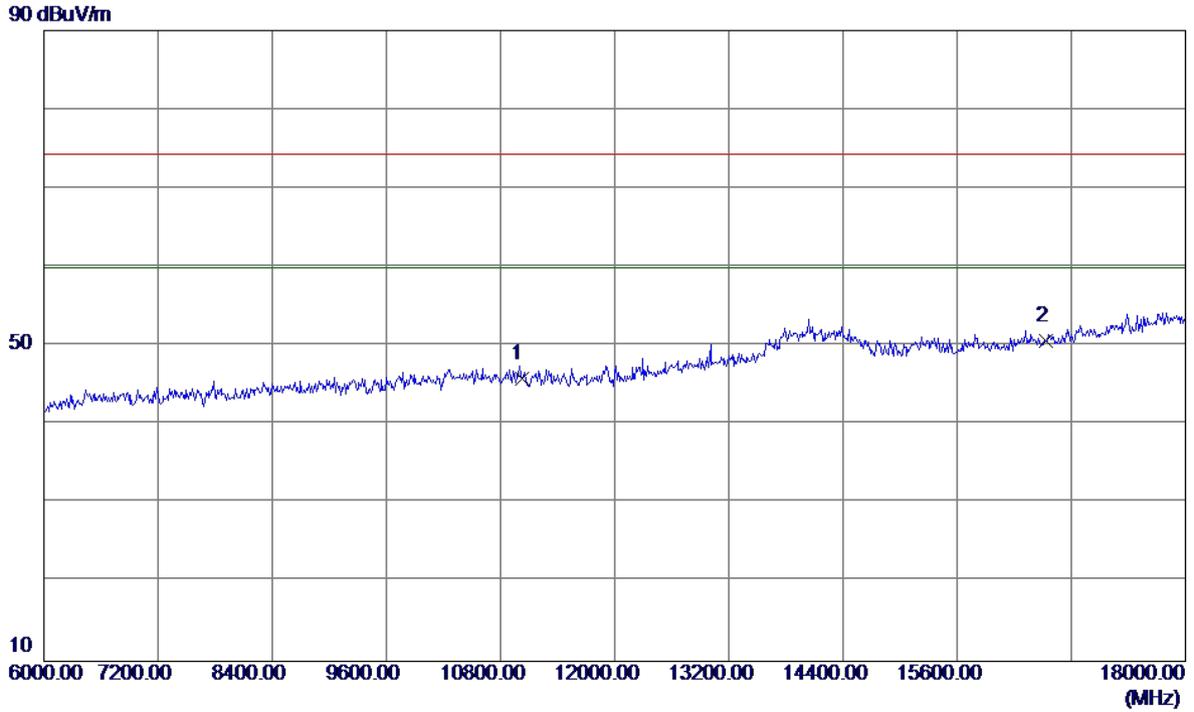

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	29.92	15.91	45.83	74.30	-28.47	Peak	
2 *	16530.0000	32.59	18.08	50.67	74.30	-23.63	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical


100 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

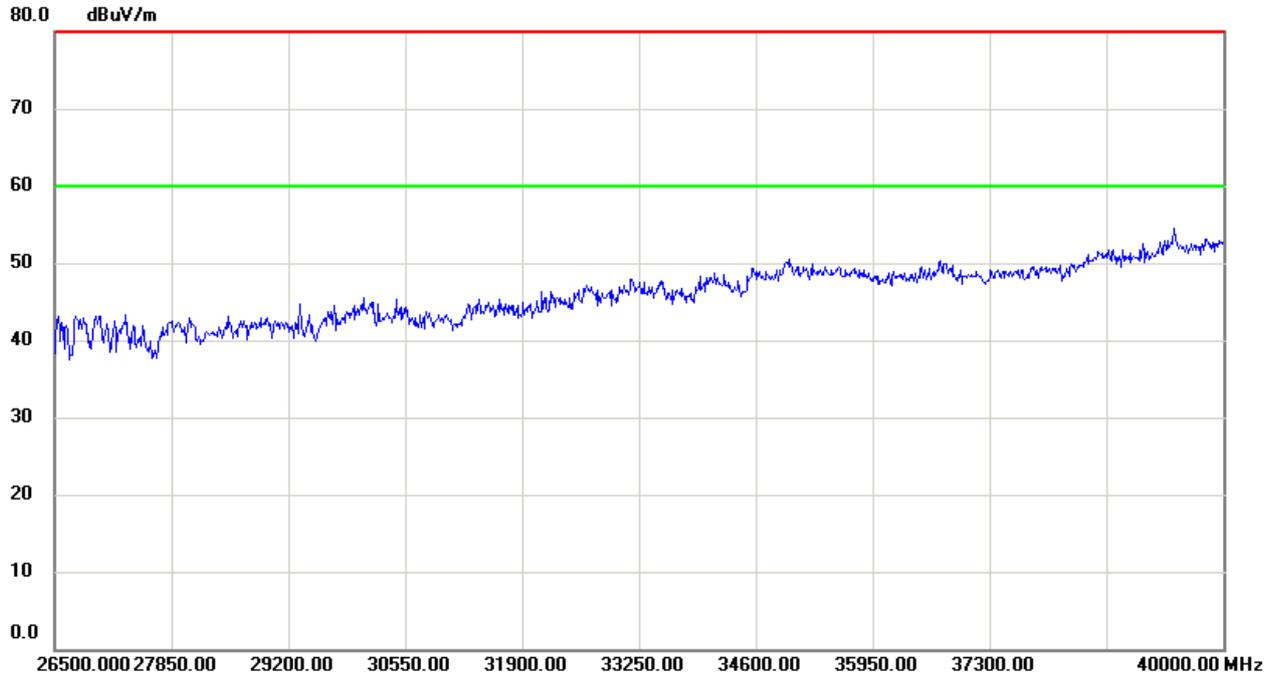


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal


110 dBuV/m

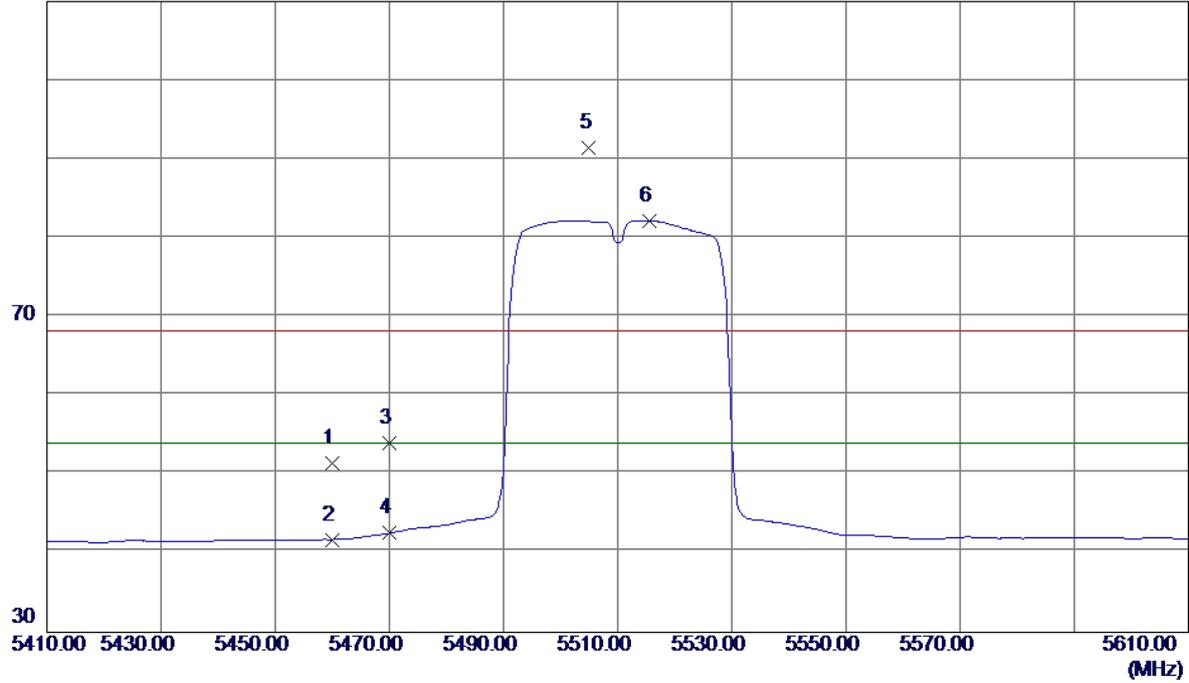

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	9.79	41.65	51.44	68.30	-16.86	Peak	
2	5460.0000	0.11	41.65	41.76	54.00	-12.24	AVG	
3	5470.0000	12.26	41.68	53.94	68.30	-14.36	Peak	
4	5470.0000	0.89	41.68	42.57	54.00	-11.43	AVG	
5	5505.0000	49.62	41.80	91.42	68.30	23.12	Peak	No Limit
6 *	5515.6000	40.35	41.84	82.19	54.00	28.19	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz


Horizontal

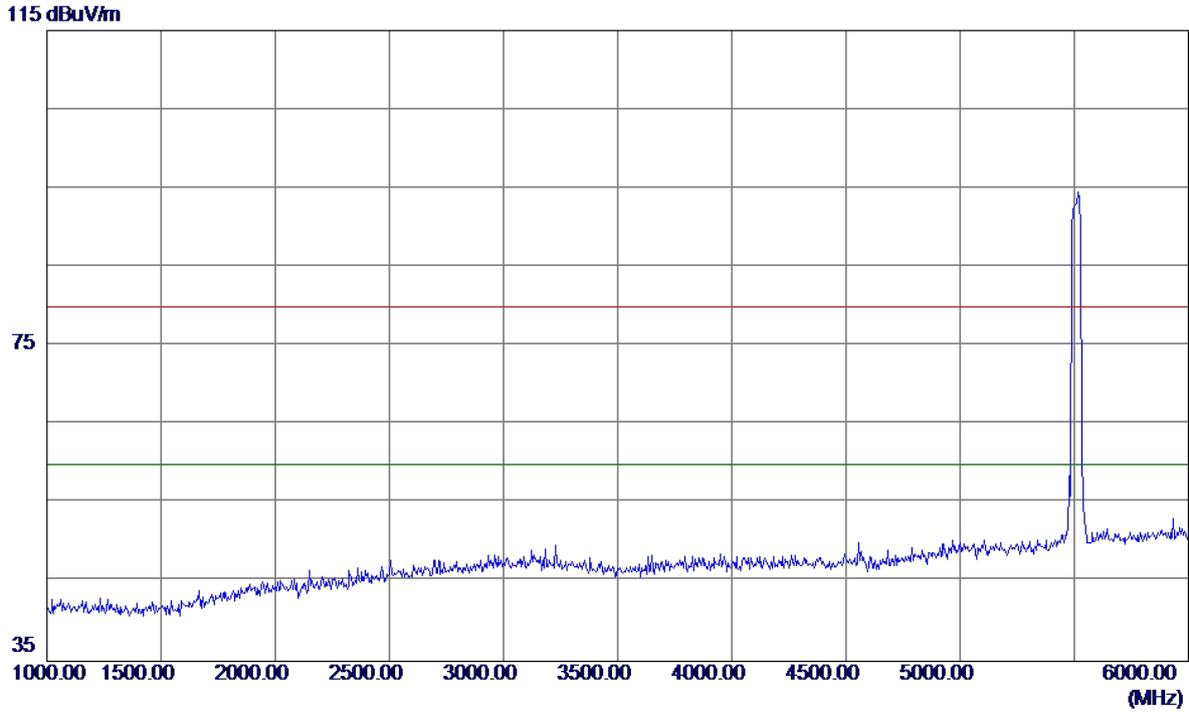

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal

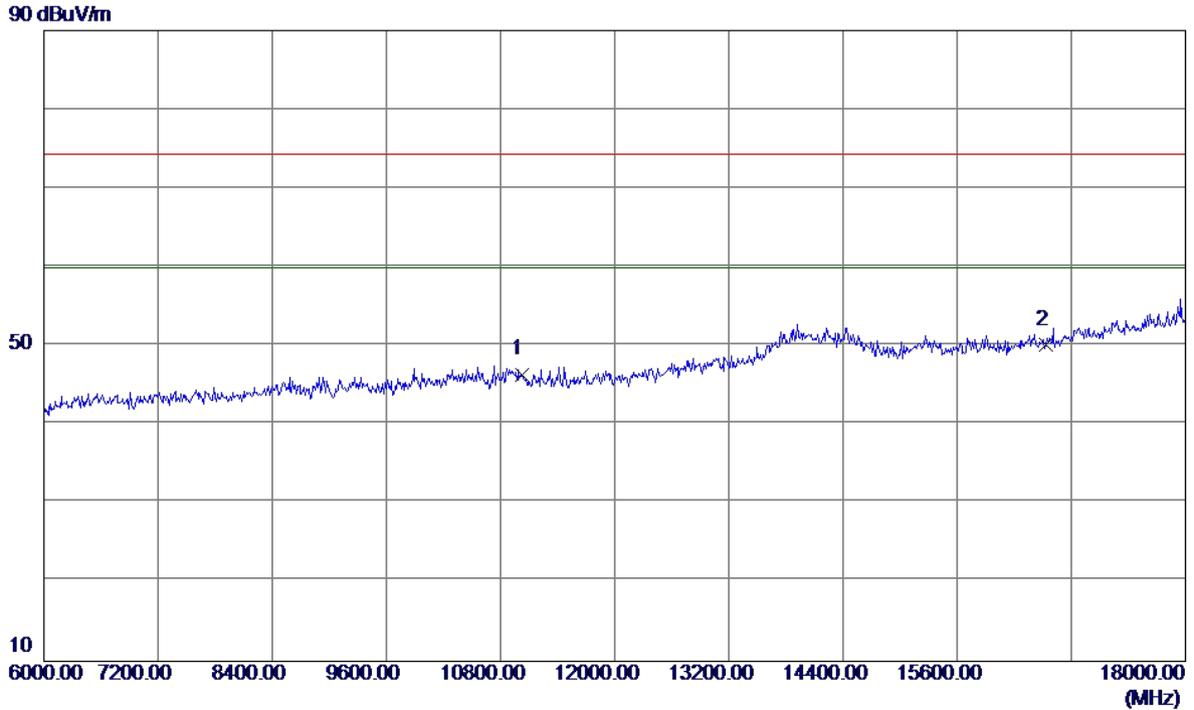

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	30.49	15.91	46.40	74.30	-27.90	Peak	
2 *	16530.0000	32.02	18.08	50.10	74.30	-24.20	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal


100 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal

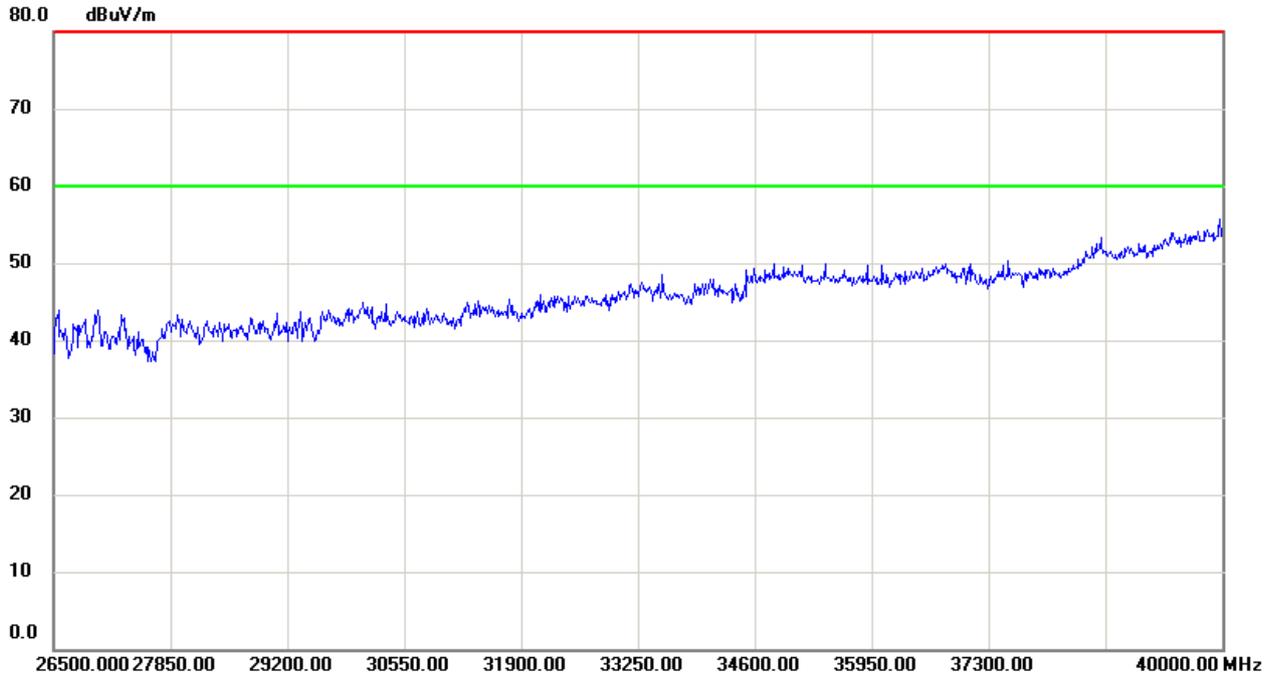


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Vertical

110 dBuV/m

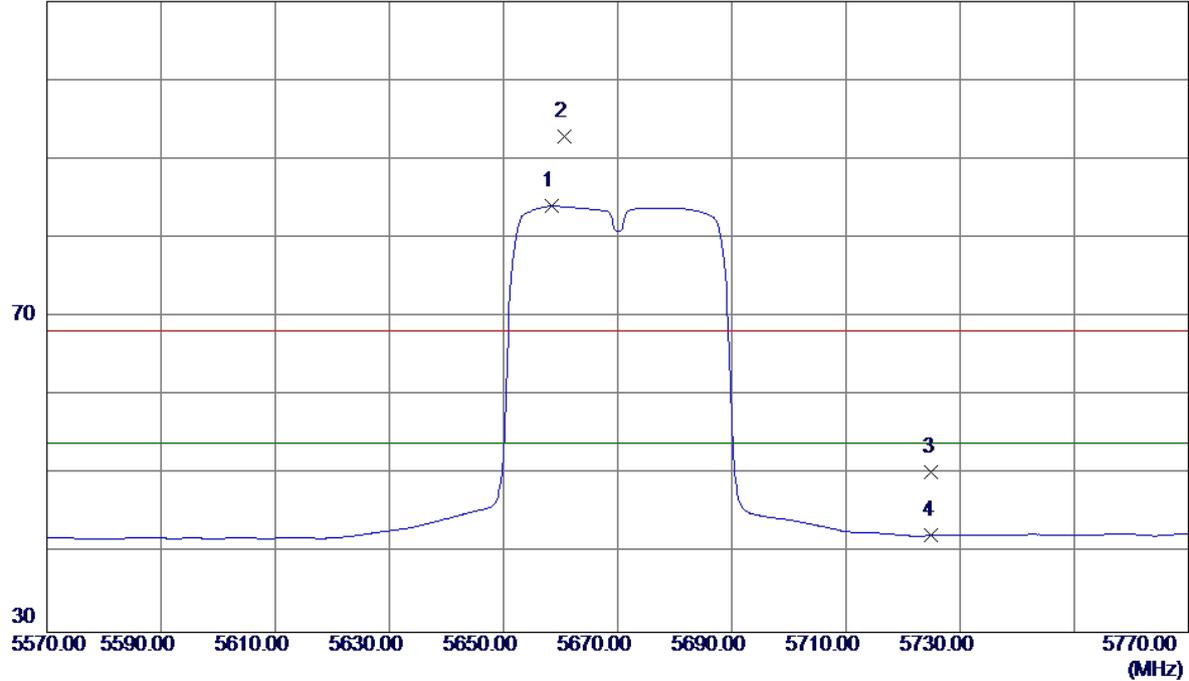


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5658.4000	41.71	42.34	84.05	54.00	30.05	AVG	No Limit
2	5660.6000	50.52	42.35	92.87	68.30	24.57	Peak	No Limit
3	5725.0000	7.69	42.58	50.27	68.30	-18.03	Peak	
4	5725.0000	-0.30	42.58	42.28	54.00	-11.72	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Vertical


115 dBuV/m

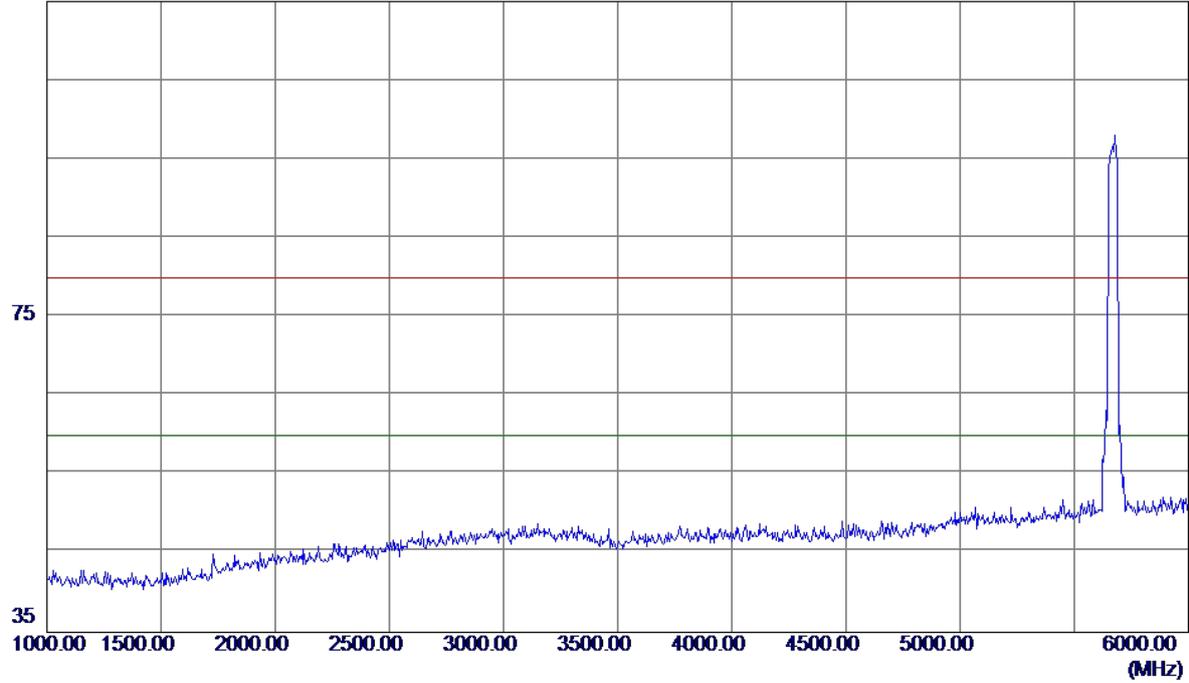

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz


Vertical

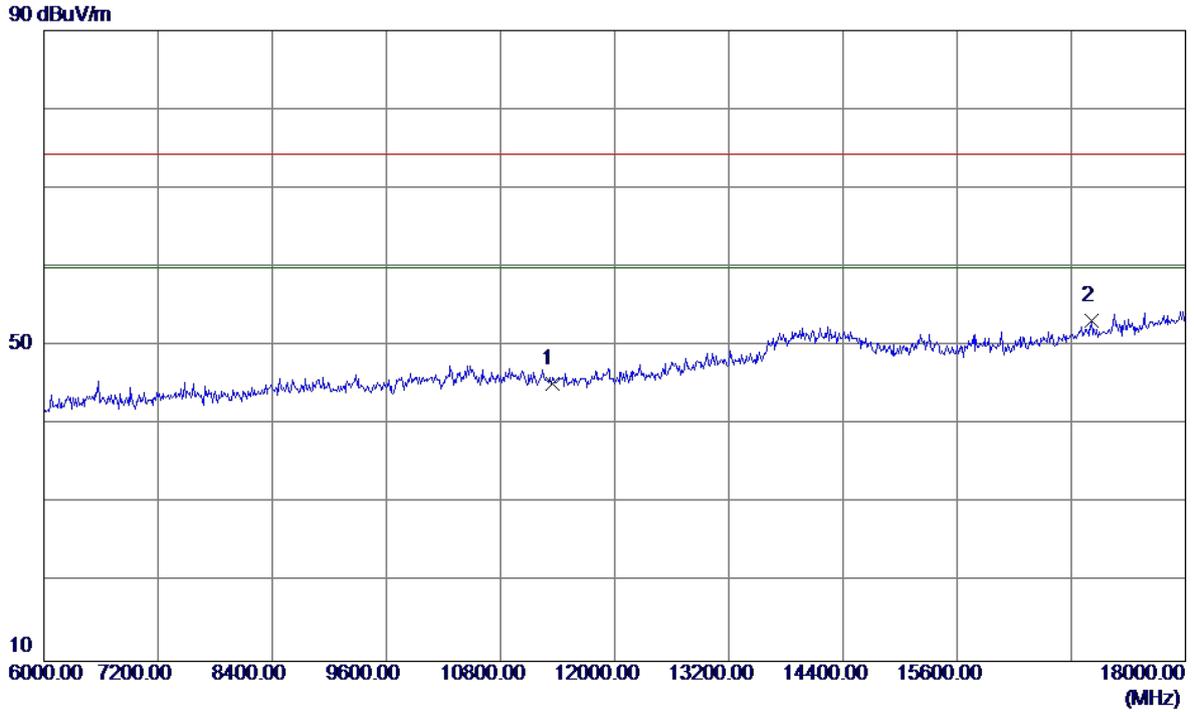

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0000	29.58	15.62	45.20	74.30	-29.10	Peak	
2 *	17010.0000	32.81	20.32	53.13	74.30	-21.17	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Vertical

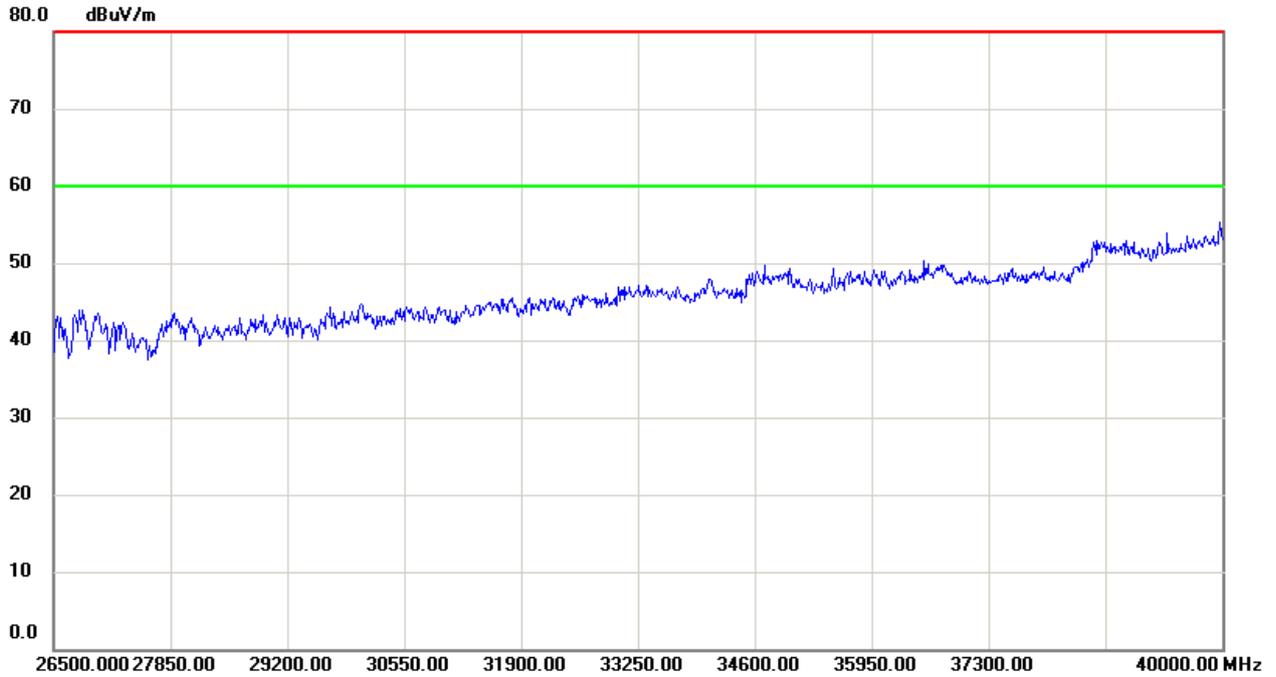


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Horizontal


110 dBuV/m

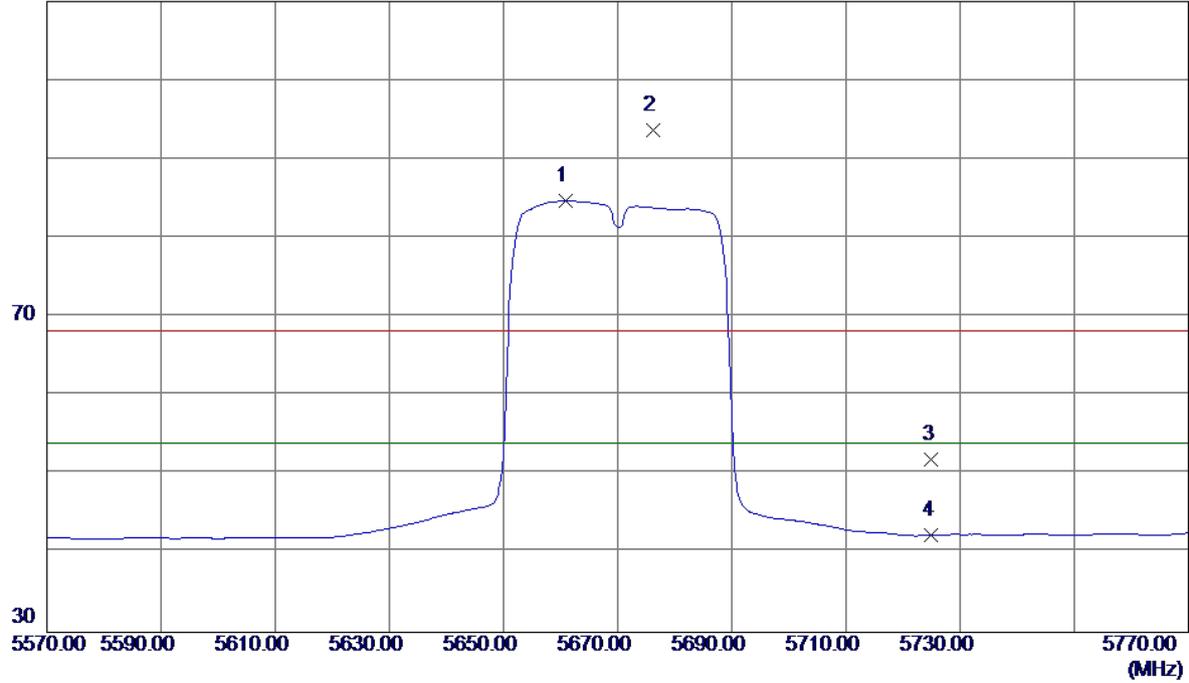

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5660.8000	42.34	42.35	84.69	54.00	30.69	AVG	No Limit
2	5676.2000	51.34	42.41	93.75	68.30	25.45	Peak	No Limit
3	5725.0000	9.40	42.58	51.98	68.30	-16.32	Peak	
4	5725.0000	-0.25	42.58	42.33	54.00	-11.67	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz


Horizontal

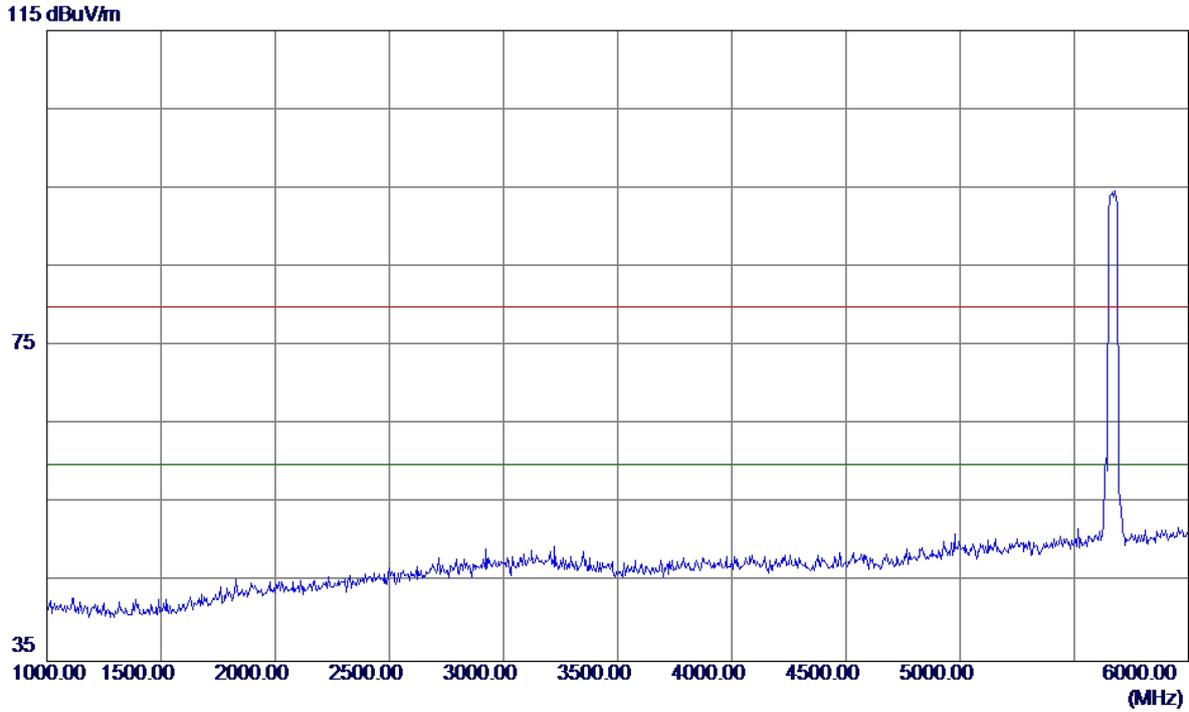

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz


Horizontal

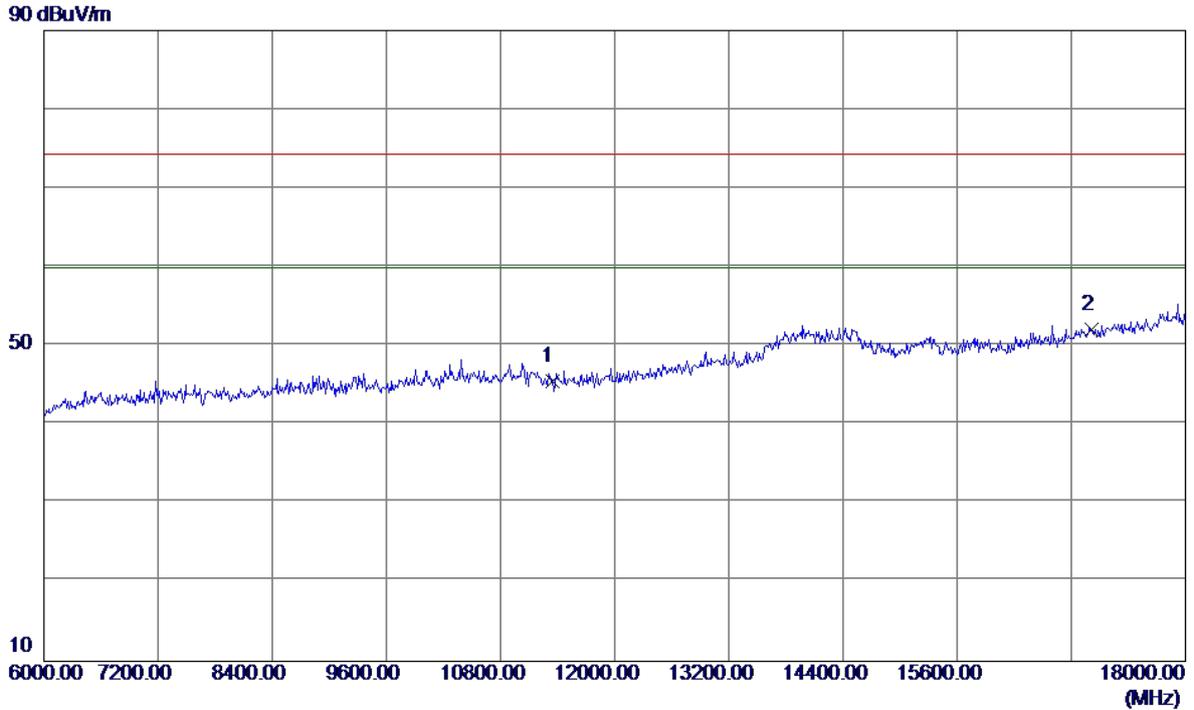

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0000	29.89	15.62	45.51	74.30	-28.79	Peak	
2 *	17010.0000	31.74	20.32	52.06	74.30	-22.24	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz


Horizontal

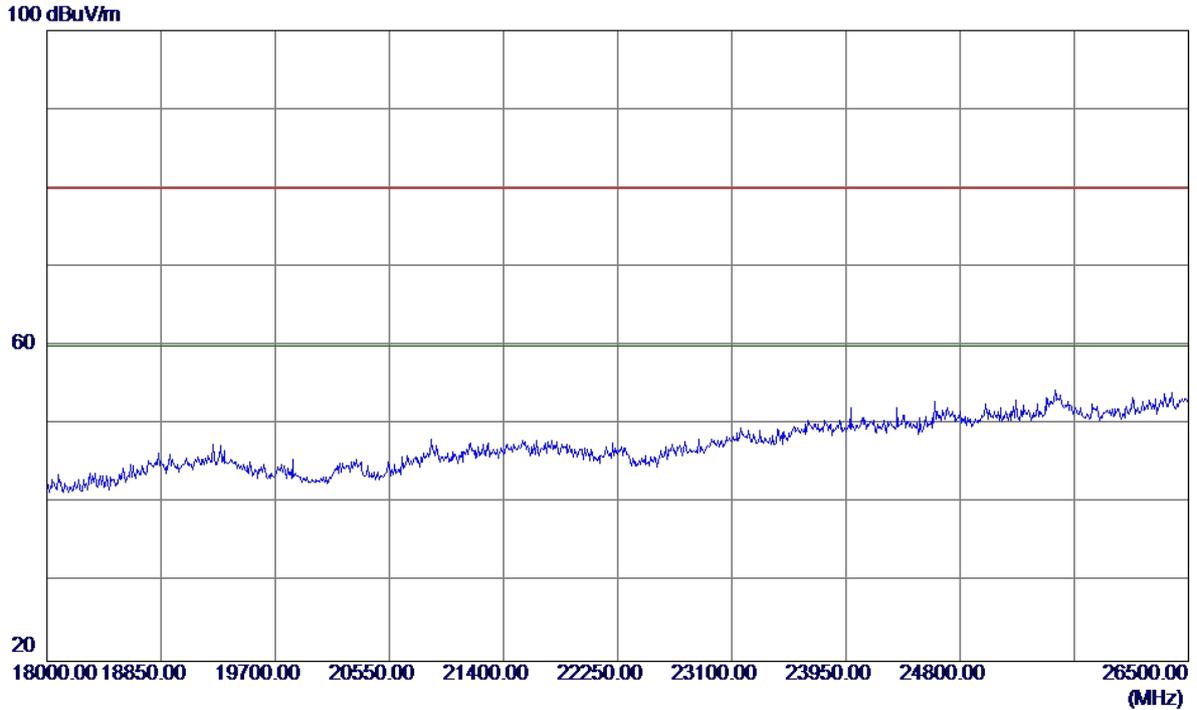

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz


Horizontal

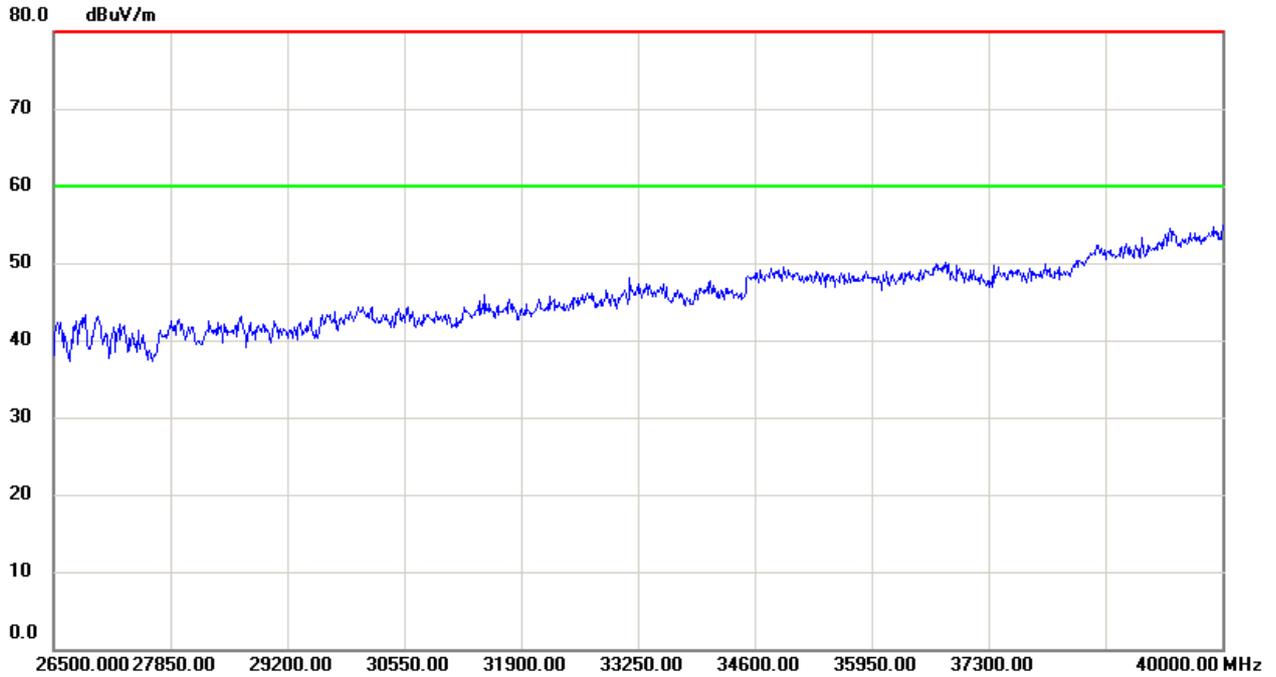

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Vertical

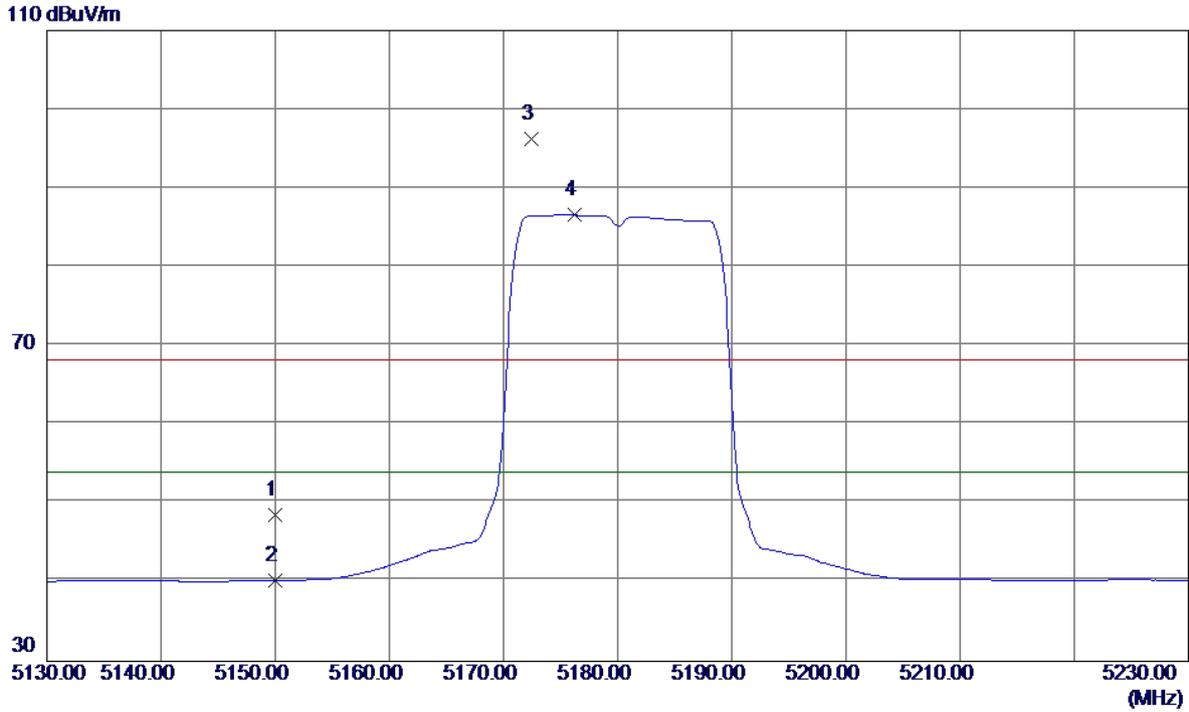


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	7.89	40.62	48.51	68.30	-19.79	Peak	
2	5150.0000	-0.37	40.62	40.25	54.00	-13.75	AVG	
3	5172.4000	55.57	40.70	96.27	68.30	27.97	Peak	No Limit
4 *	5176.2000	45.89	40.71	86.60	54.00	32.60	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz

Vertical


115 dBuV/m

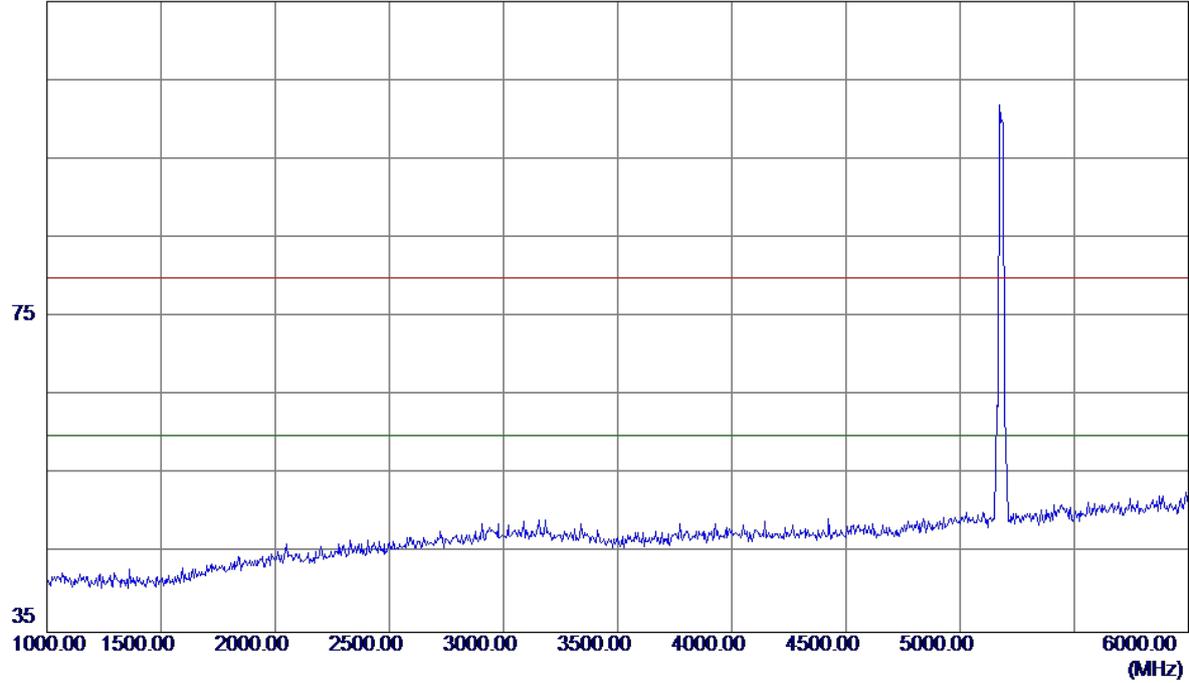

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
	5180	115		115	75	40		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Vertical

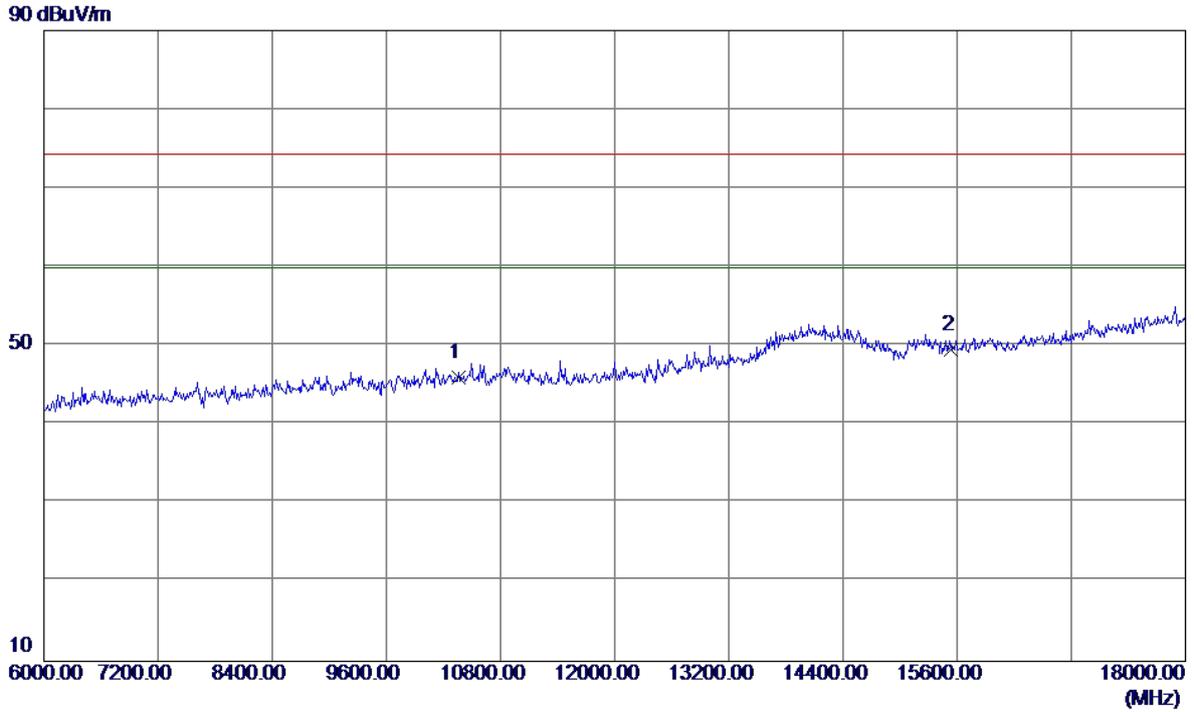

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.0000	30.99	14.96	45.95	74.30	-28.35	Peak	
2 *	15540.0000	31.59	17.86	49.45	74.30	-24.85	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Vertical

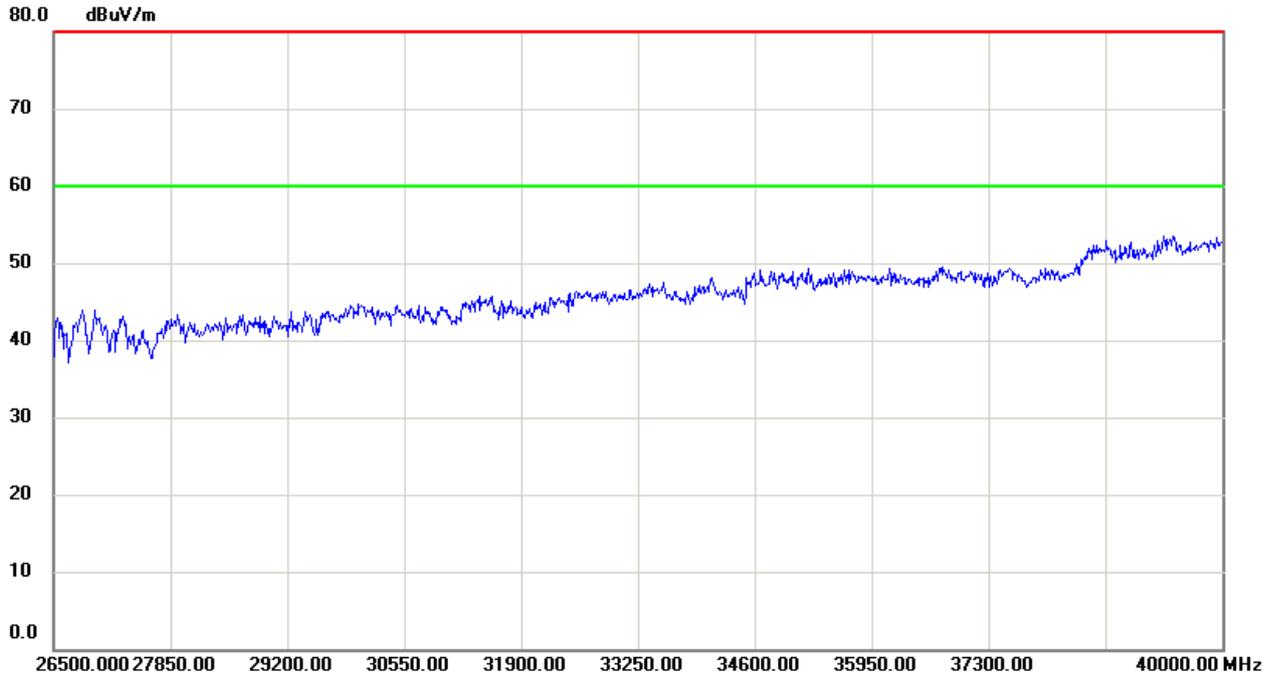

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

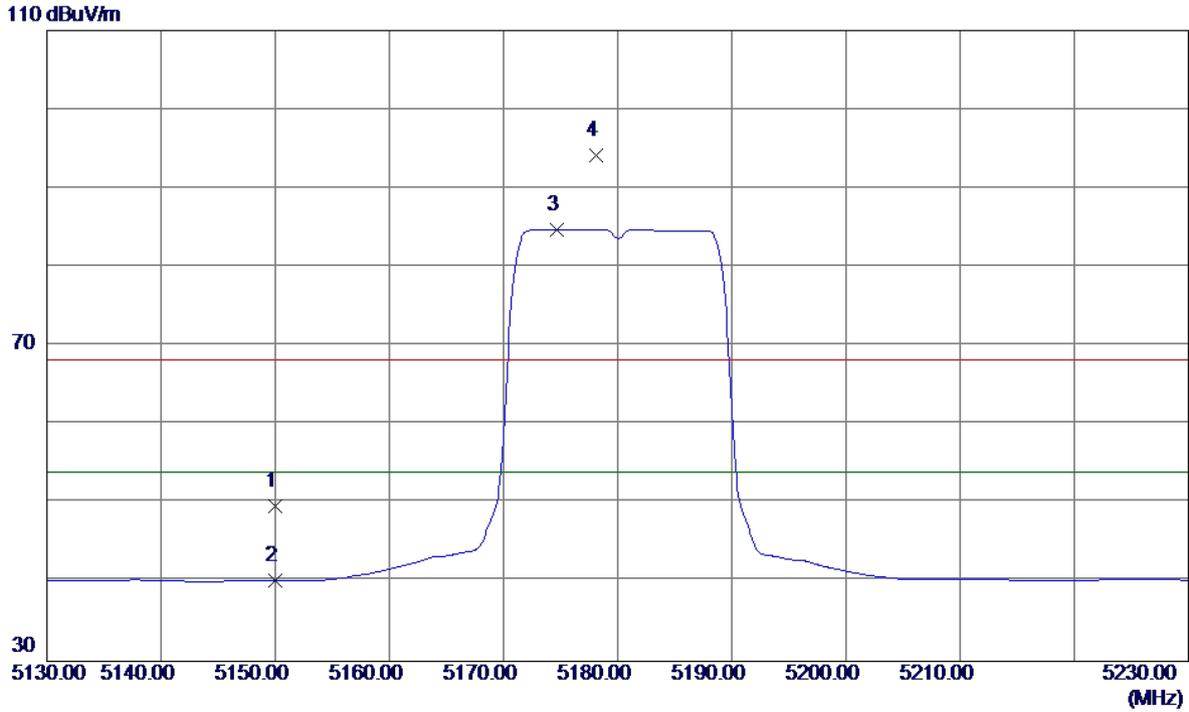

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	9.06	40.62	49.68	68.30	-18.62	Peak	
2	5150.0000	-0.37	40.62	40.25	54.00	-13.75	AVG	
3 *	5174.7000	44.07	40.71	84.78	54.00	30.78	AVG	No Limit
4	5178.1000	53.46	40.72	94.18	68.30	25.88	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

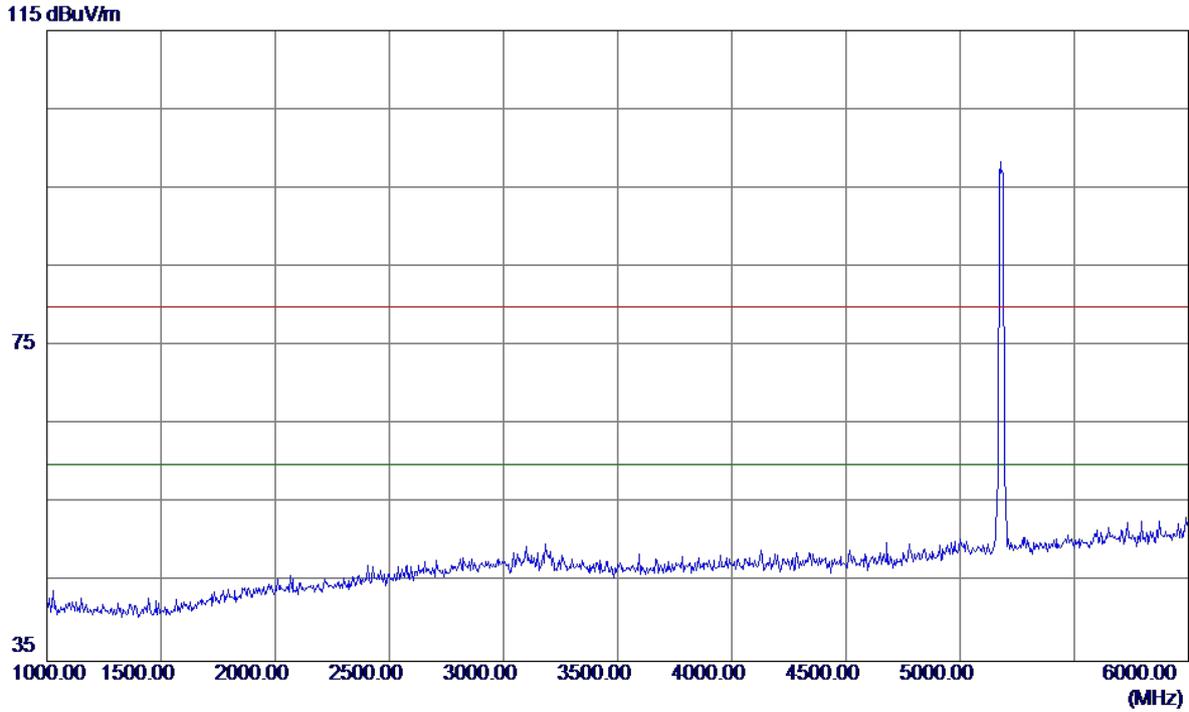

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

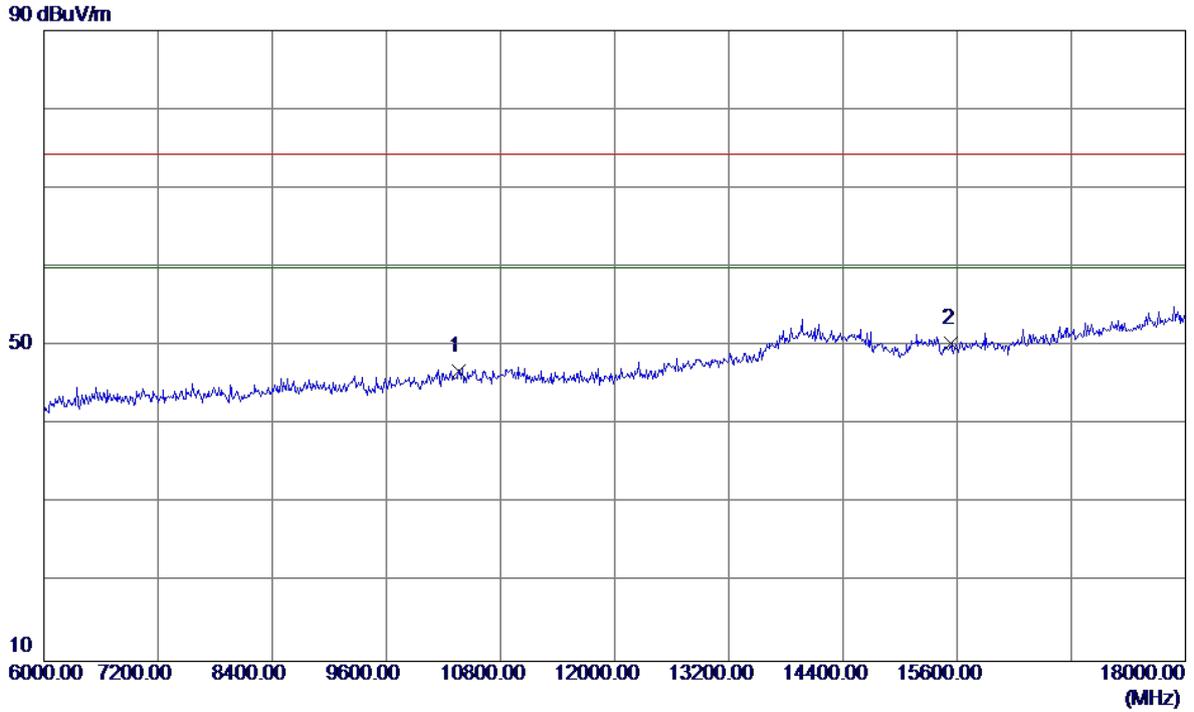

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.0000	31.83	14.96	46.79	74.30	-27.51	Peak	
2 *	15540.0000	32.49	17.86	50.35	74.30	-23.95	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

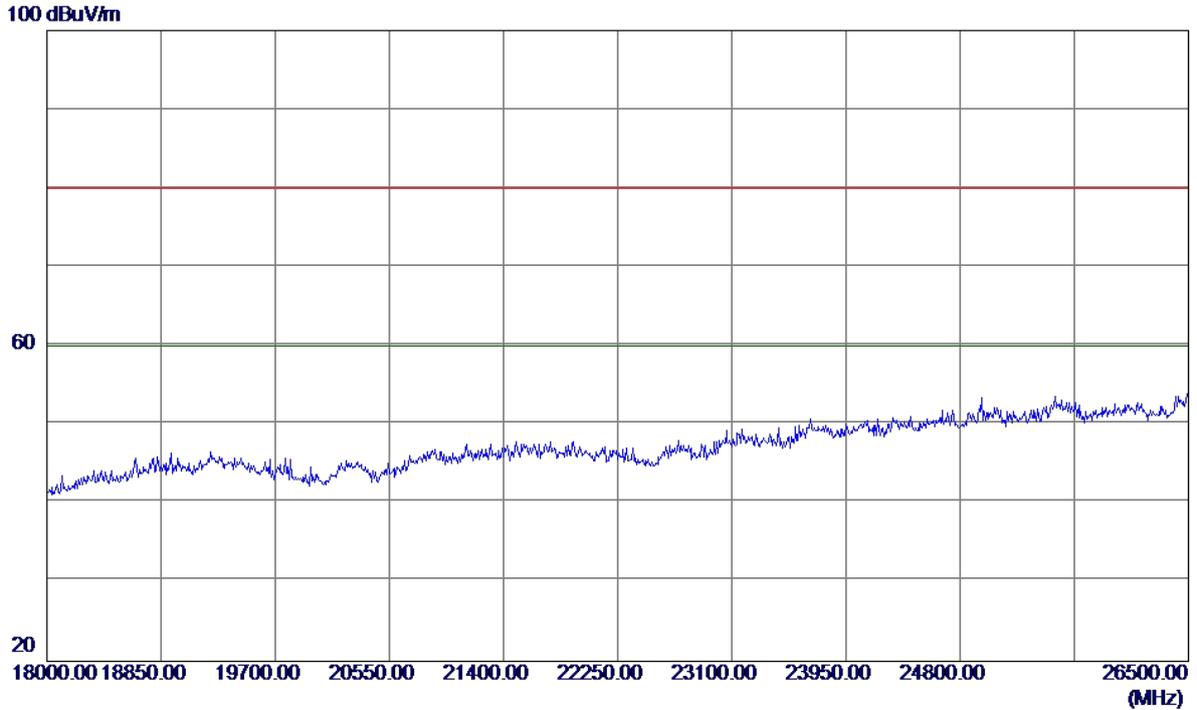

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

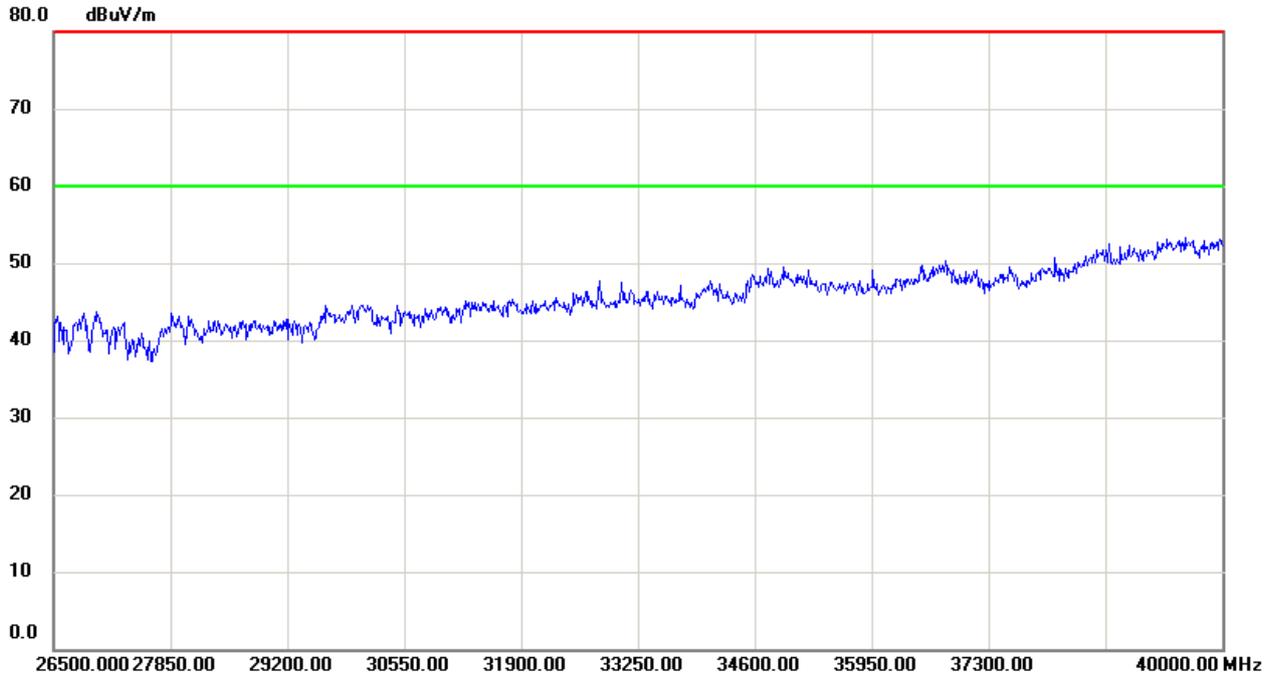

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Vertical

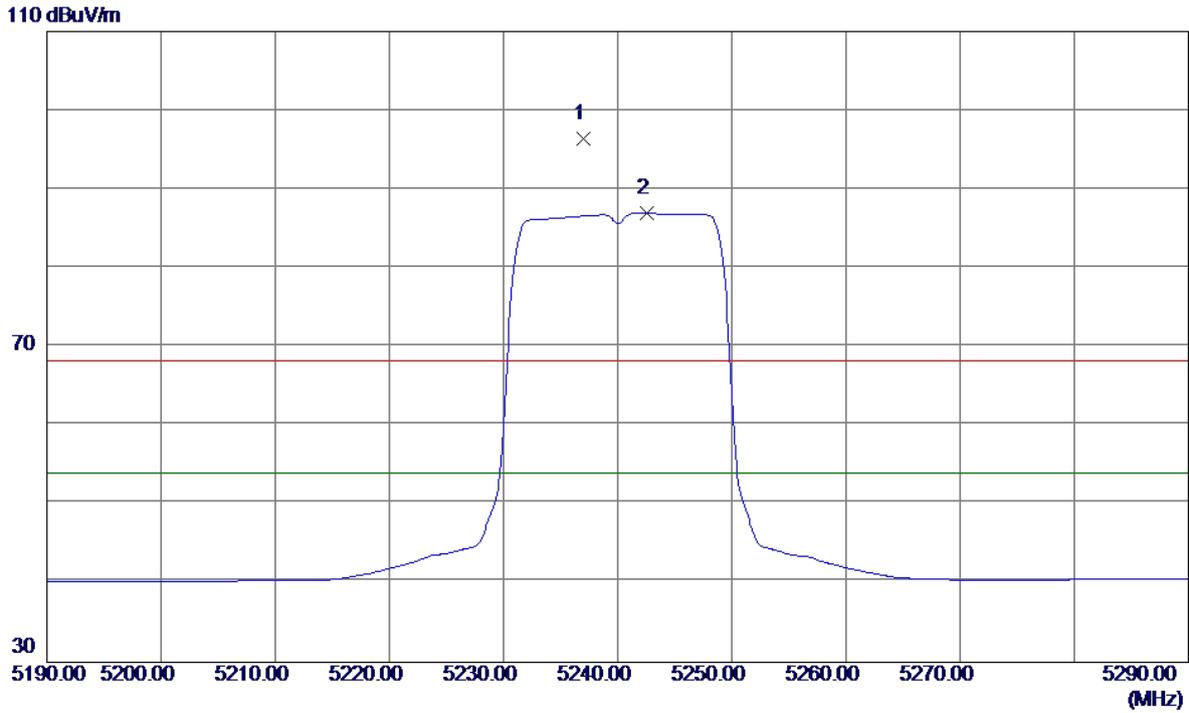

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5237.0000	55.54	40.91	96.45	68.30	28.15	Peak	No Limit
2 *	5242.6000	45.99	40.93	86.92	54.00	32.92	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Vertical

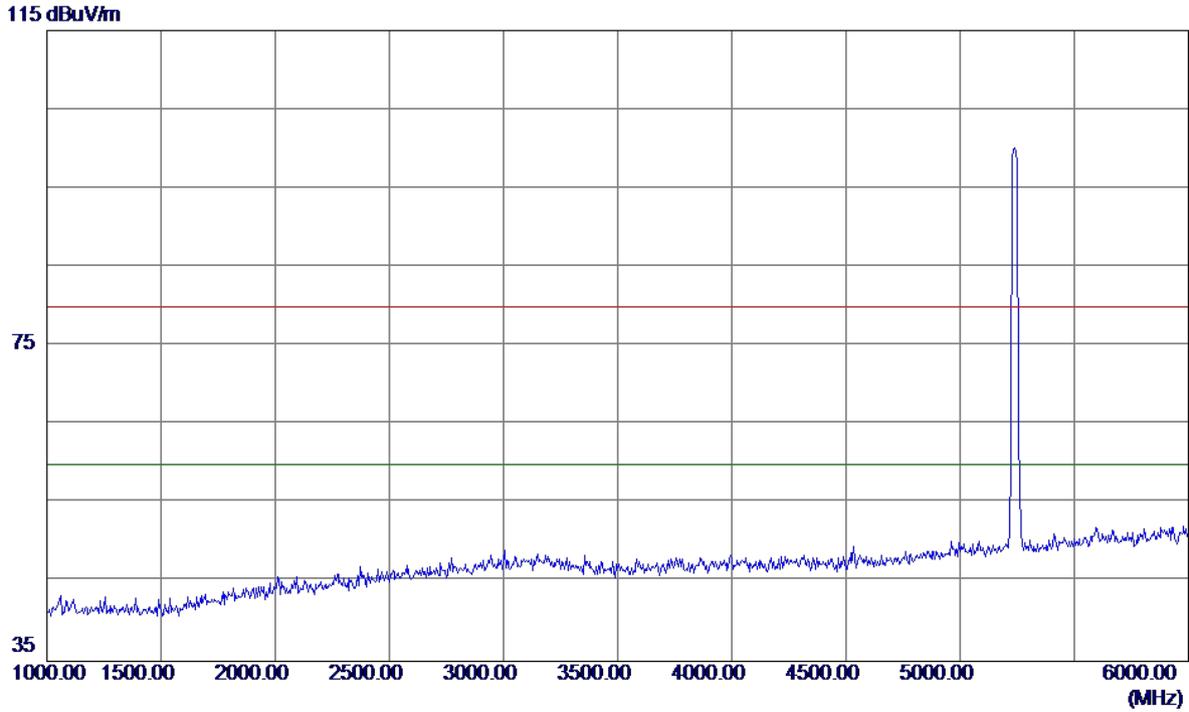

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Vertical

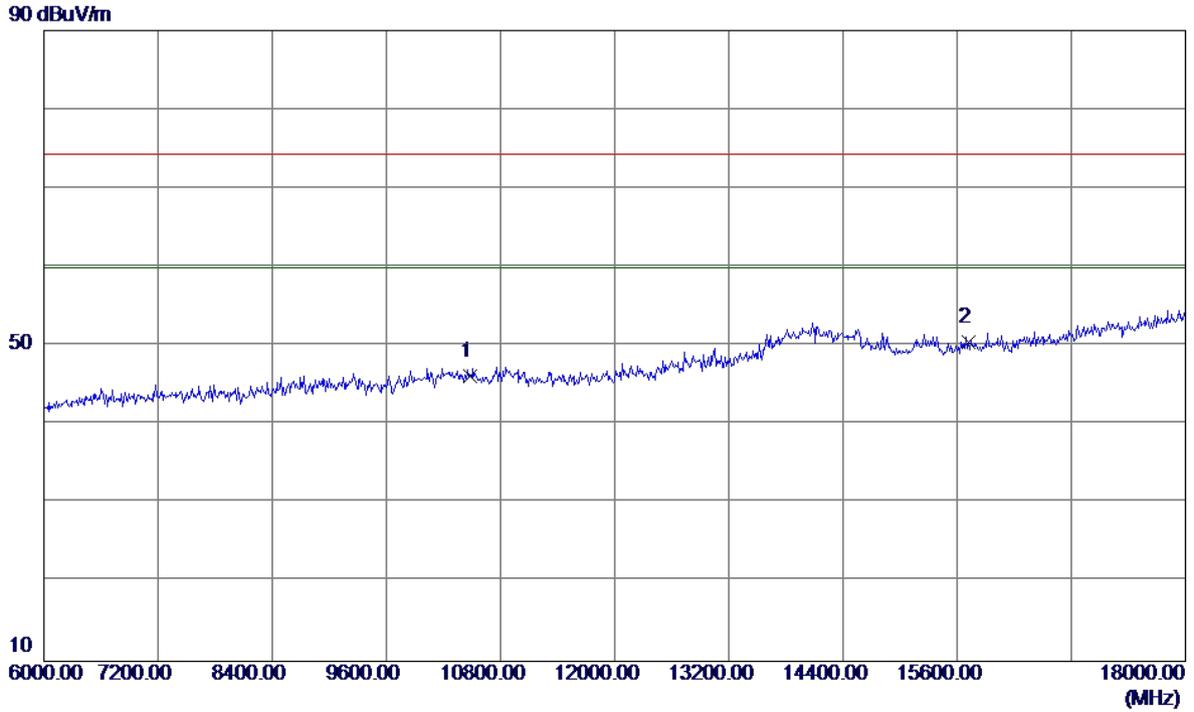


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.0000	30.93	15.24	46.17	74.30	-28.13	Peak	
2 *	15720.0000	32.68	17.86	50.54	74.30	-23.76	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Vertical


100 dBuV/m

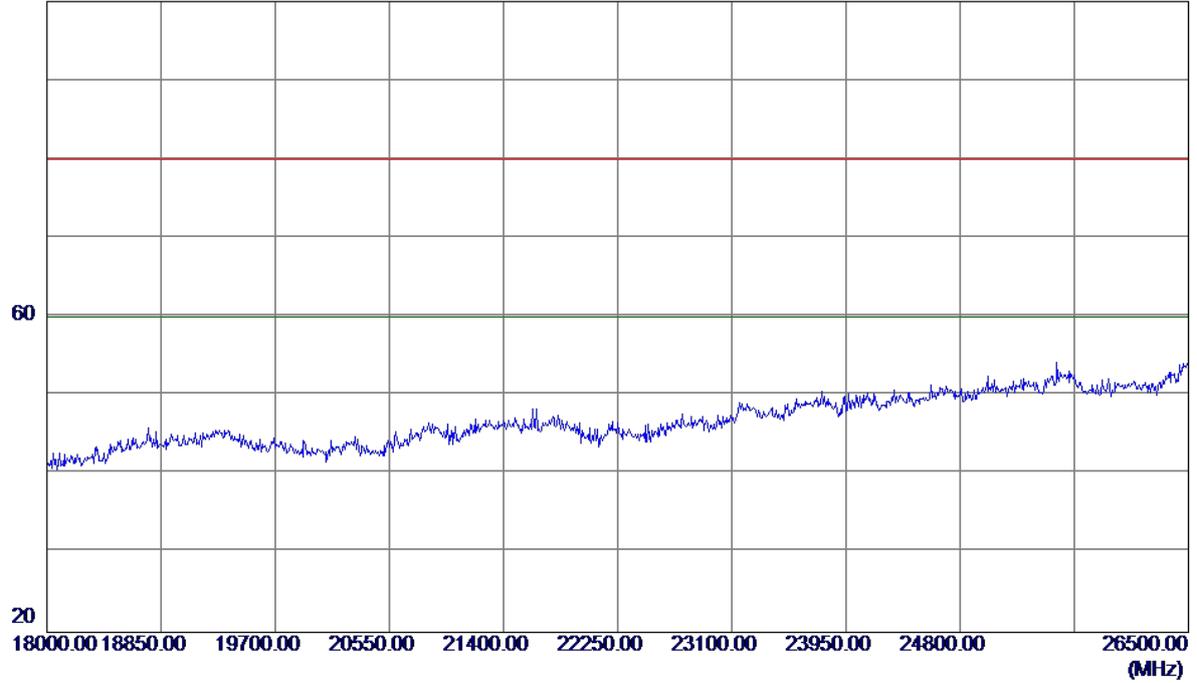

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Vertical

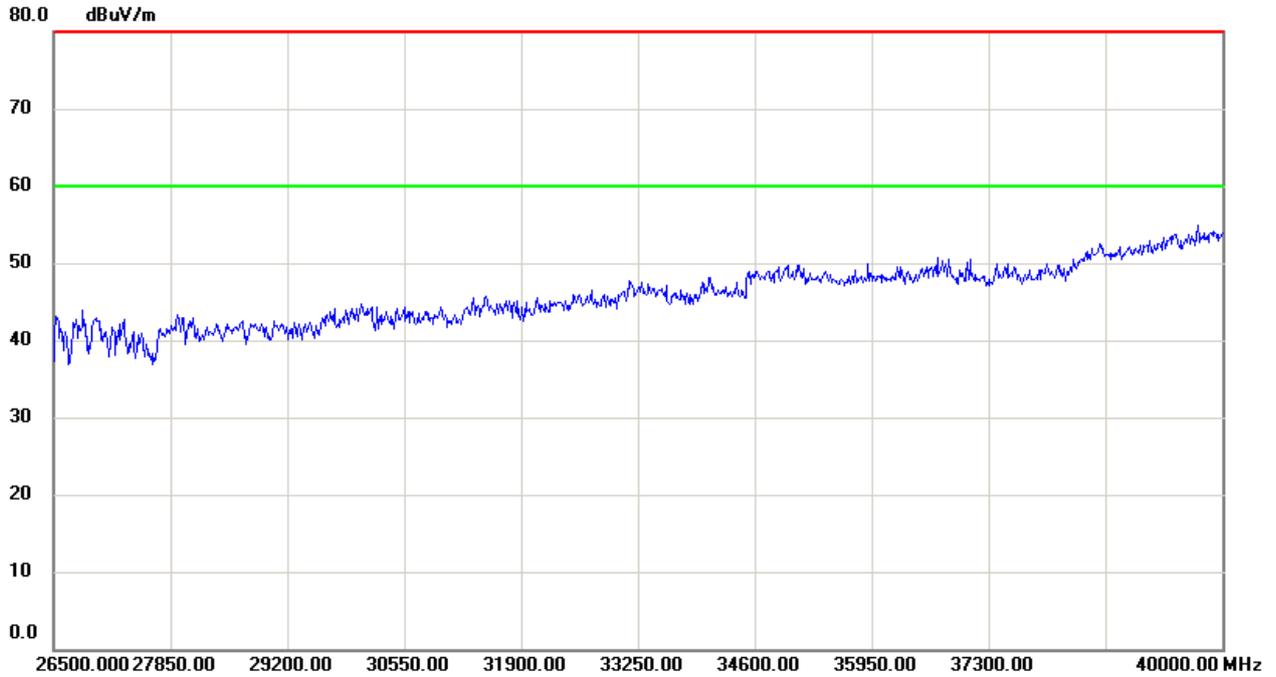

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
	26500.000							
	27850.00							
	29200.00							
	30550.00							
	31900.00							
	33250.00							
	34600.00							
	35950.00							
	37300.00							
	40000.00							

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Horizontal

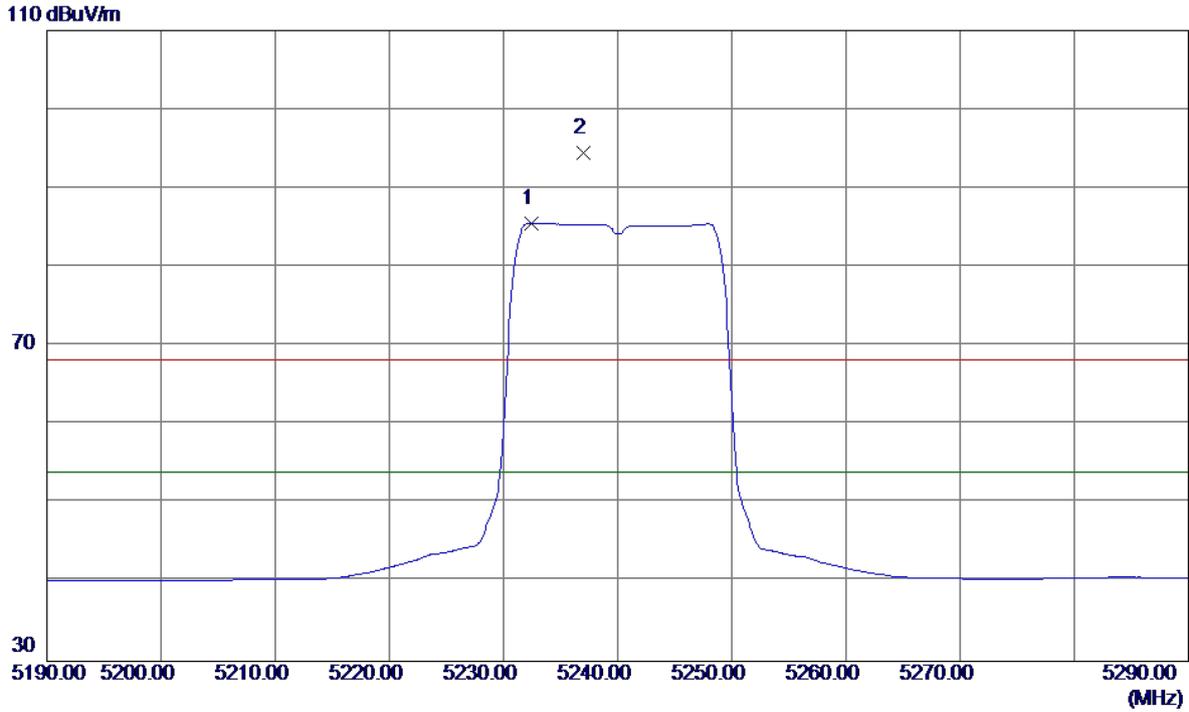

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5232.4000	44.67	40.90	85.57	54.00	31.57	AVG	No Limit
2	5237.0000	53.49	40.91	94.40	68.30	26.10	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Horizontal

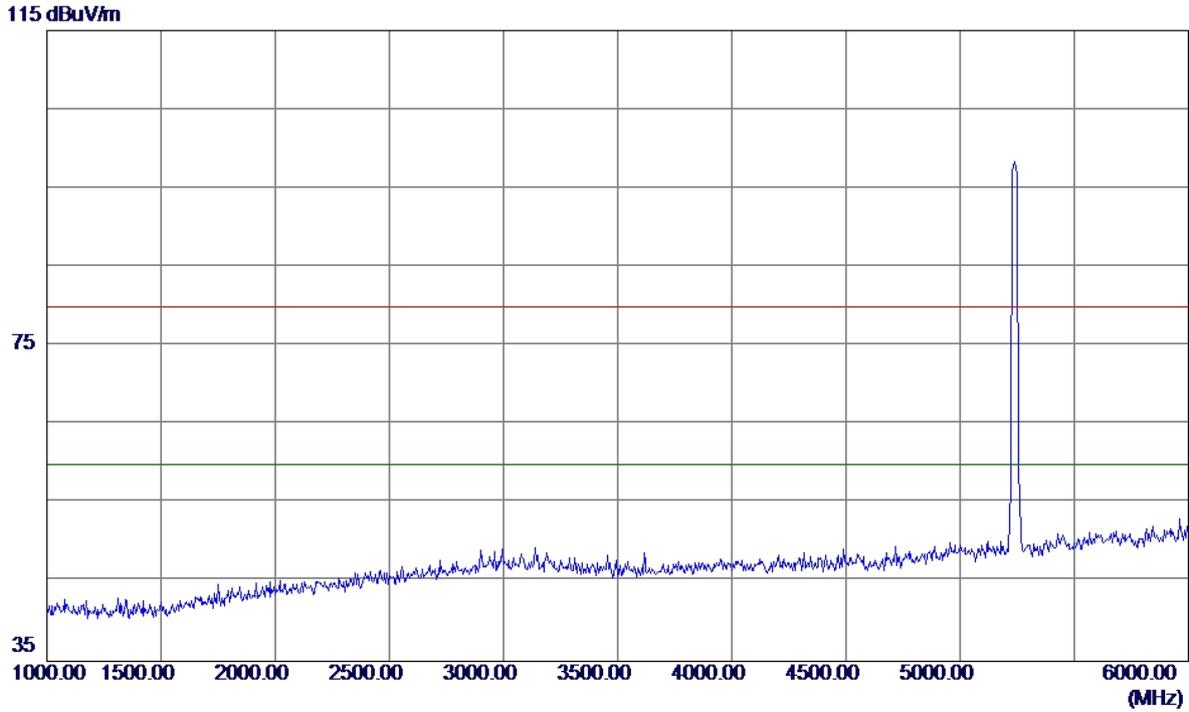

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Horizontal

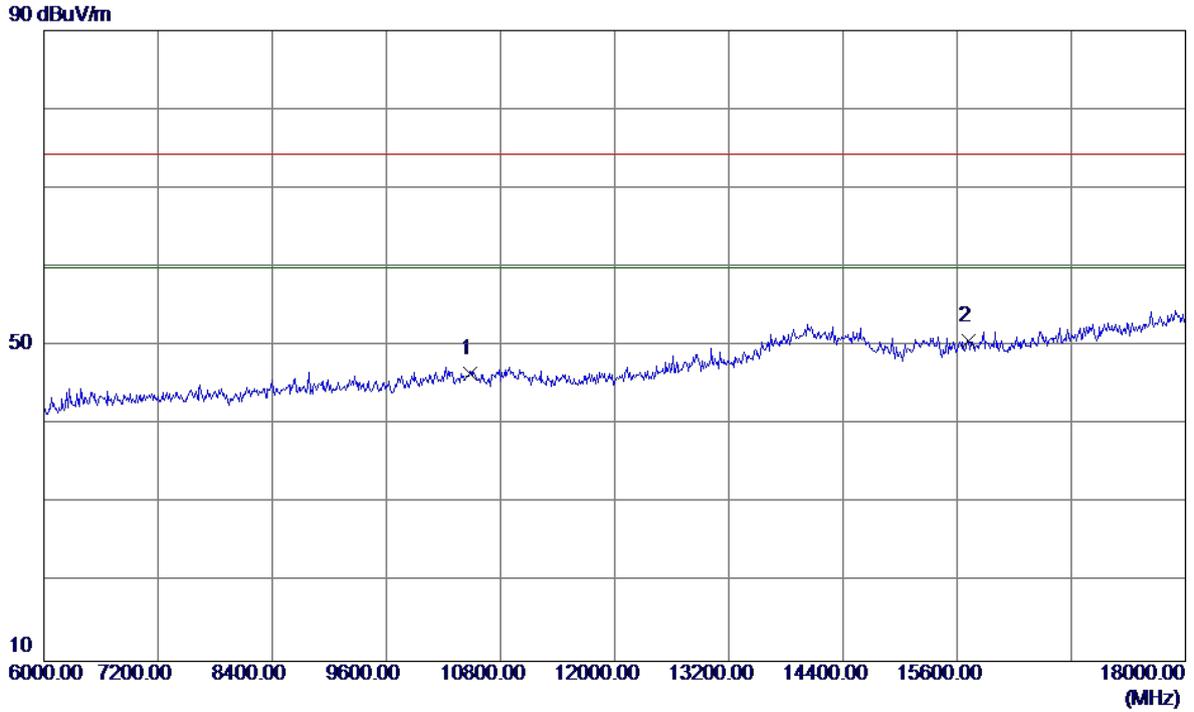

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.0000	31.23	15.24	46.47	74.30	-27.83	Peak	
2 *	15720.0000	32.75	17.86	50.61	74.30	-23.69	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

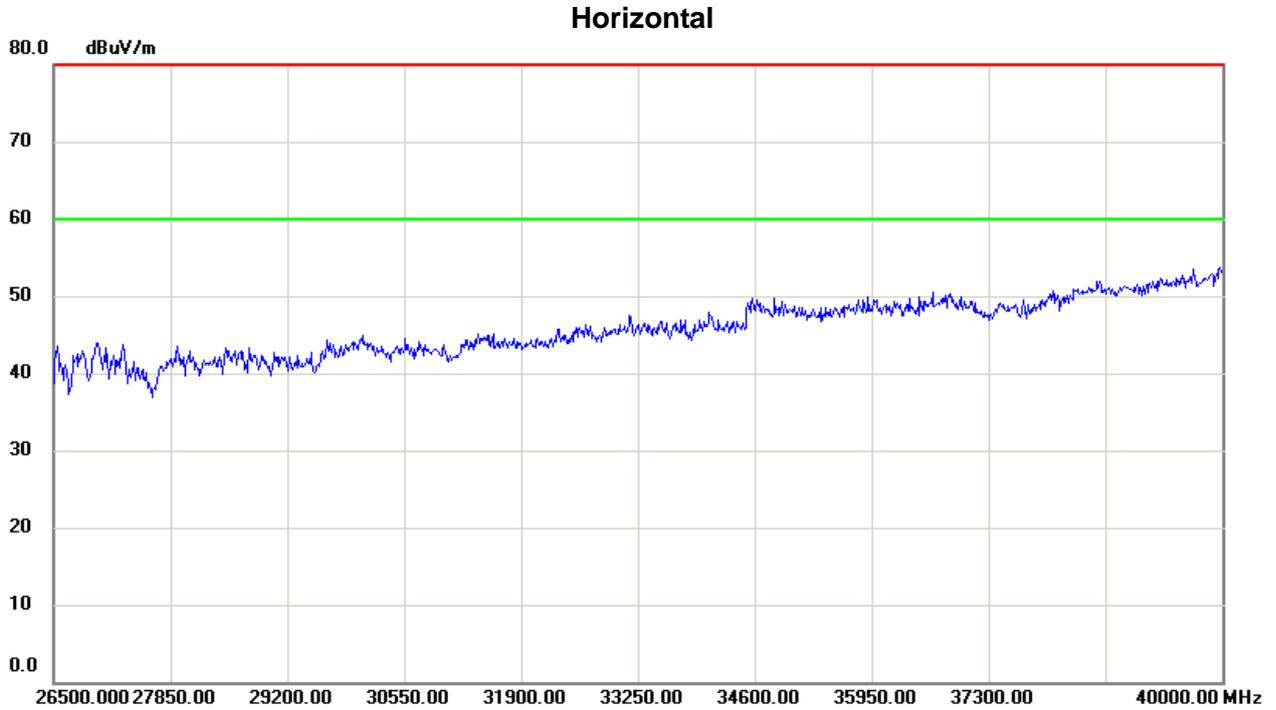


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
	26500.000							
	27850.00							
	29200.00							
	30550.00							
	31900.00							
	33250.00							
	34600.00							
	35950.00							
	37300.00							
	40000.00							

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

110 dBuV/m

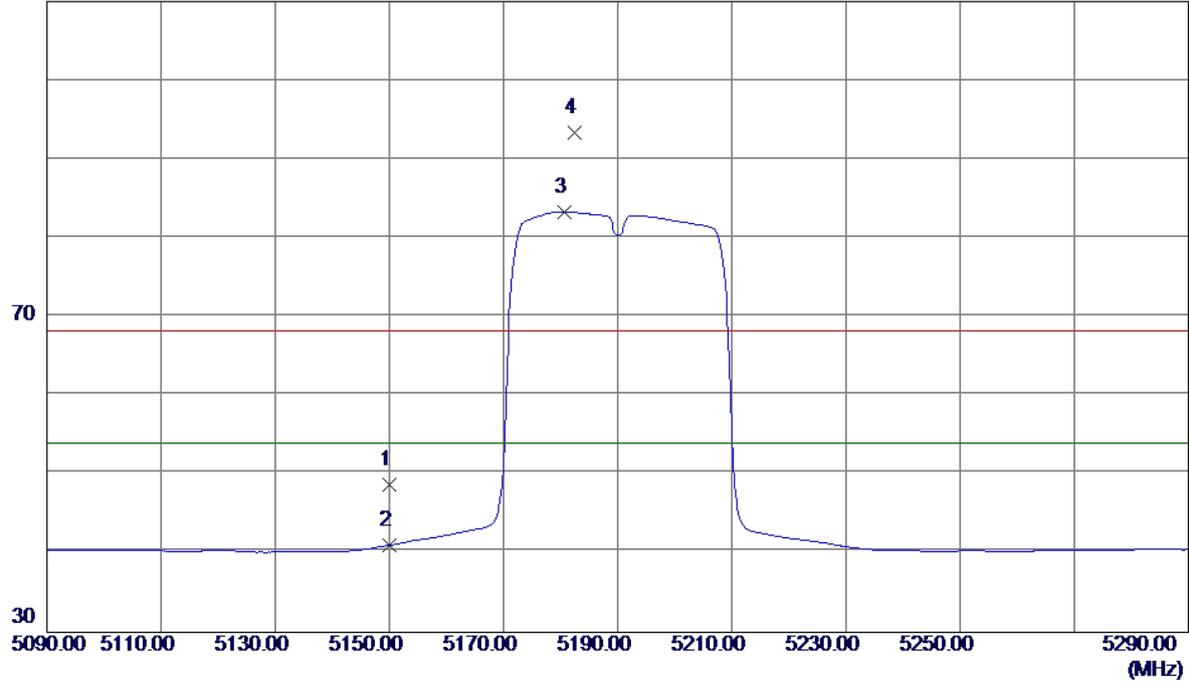


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	8.07	40.62	48.69	68.30	-19.61	Peak	
2	5150.0000	0.42	40.62	41.04	54.00	-12.96	AVG	
3 *	5180.6000	42.60	40.73	83.33	54.00	29.33	AVG	No Limit
4	5182.4000	52.62	40.73	93.35	68.30	25.05	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical


115 dBuV/m

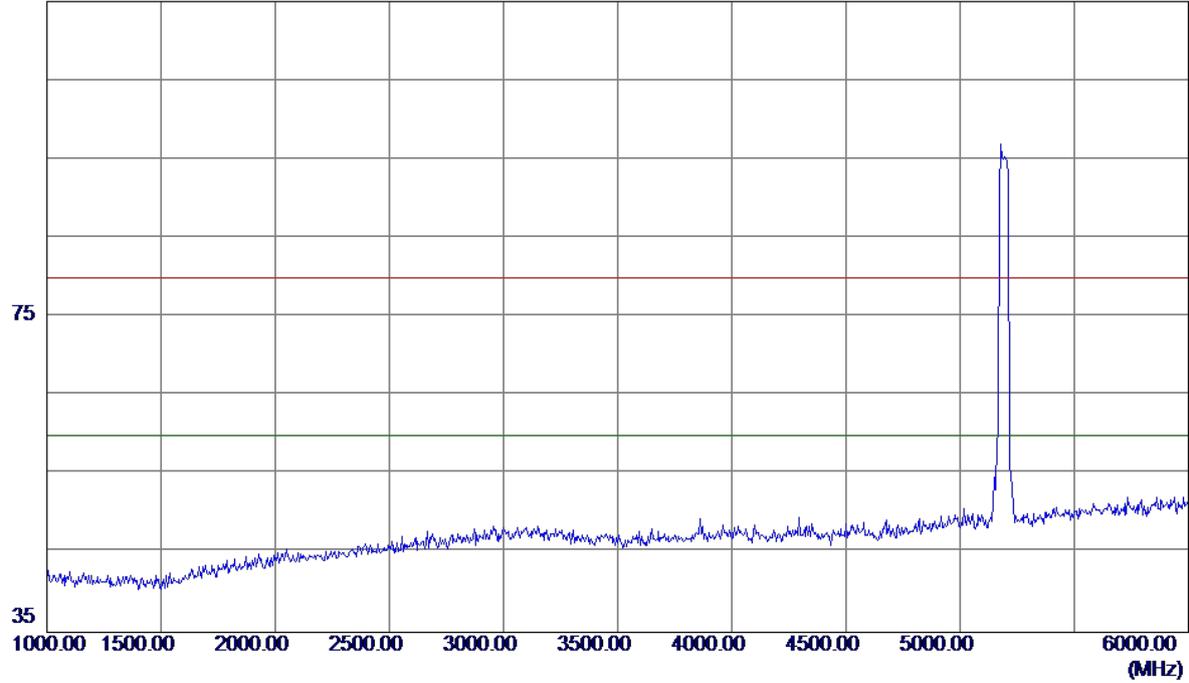

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Vertical

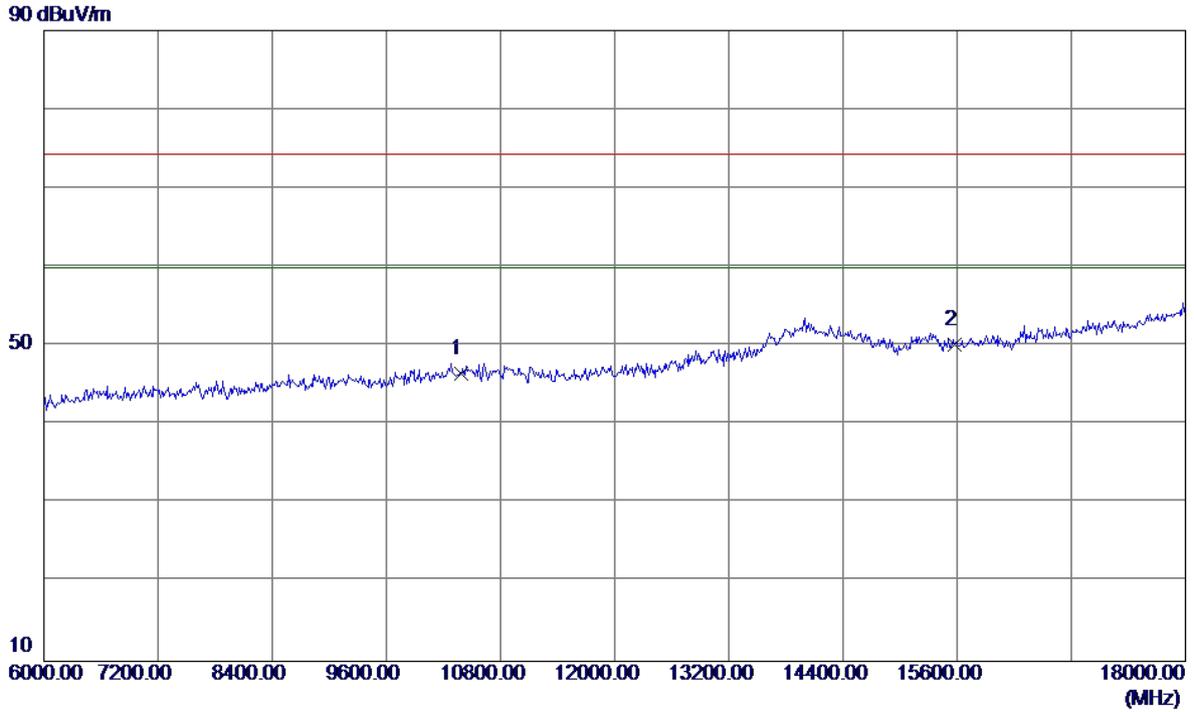

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10380.0000	31.51	15.01	46.52	74.30	-27.78	Peak	
2 *	15570.0000	32.37	17.86	50.23	74.30	-24.07	Peak	


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

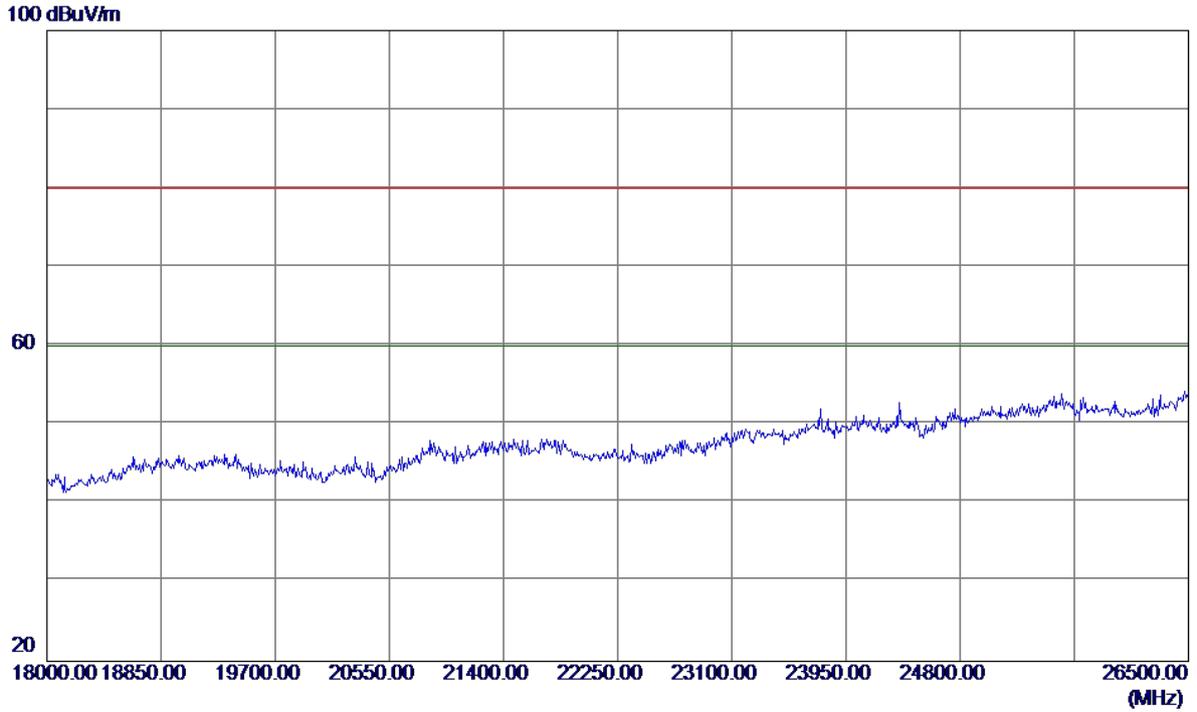

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

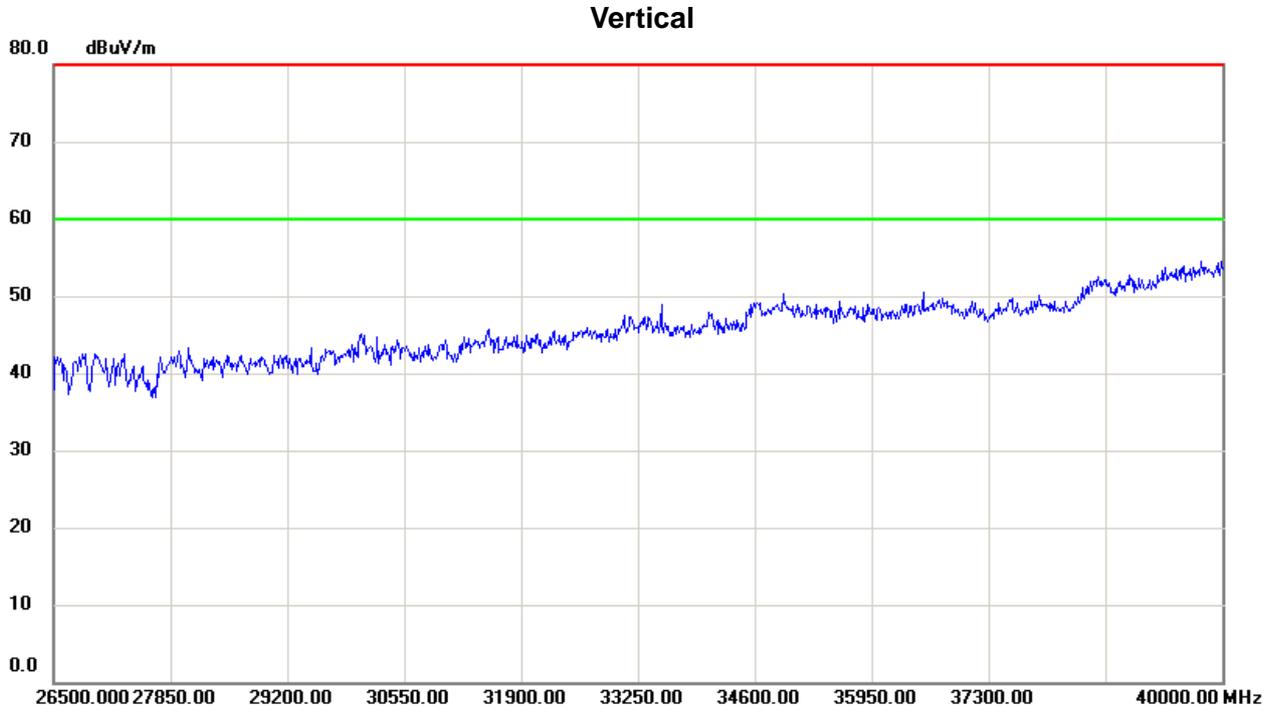


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal


110 dBuV/m

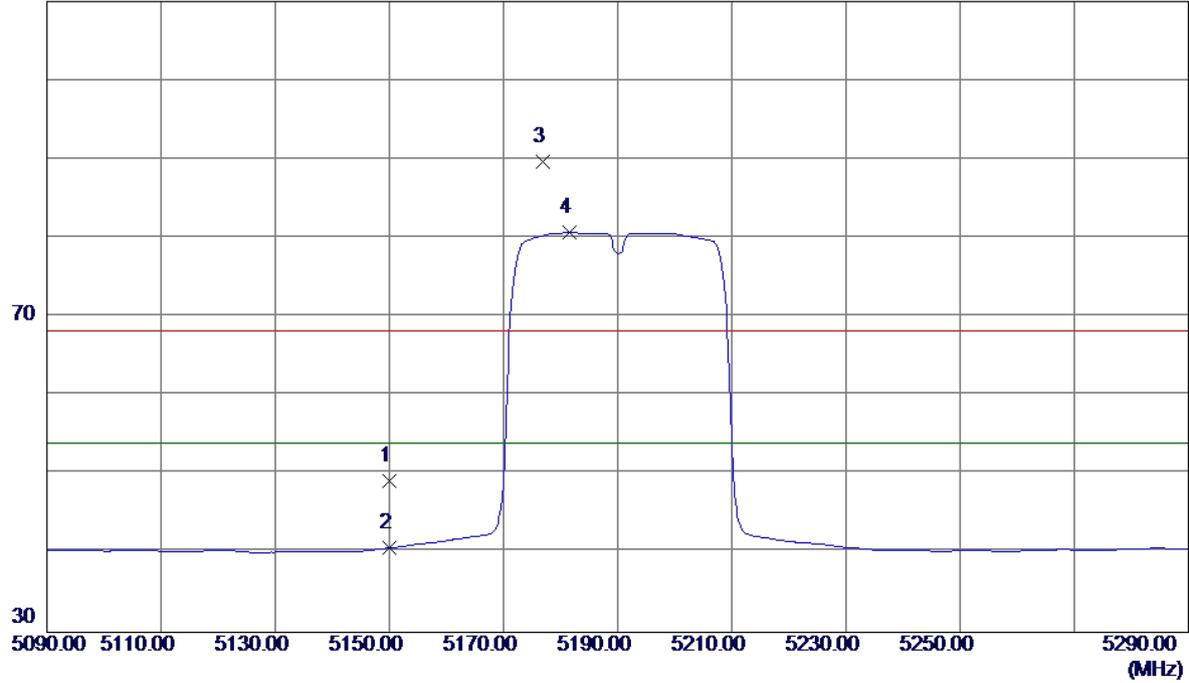

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	8.60	40.62	49.22	68.30	-19.08	Peak	
2	5150.0000	0.07	40.62	40.69	54.00	-13.31	AVG	
3	5176.8000	48.90	40.71	89.61	68.30	21.31	Peak	No Limit
4 *	5181.6000	39.96	40.73	80.69	54.00	26.69	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Horizontal

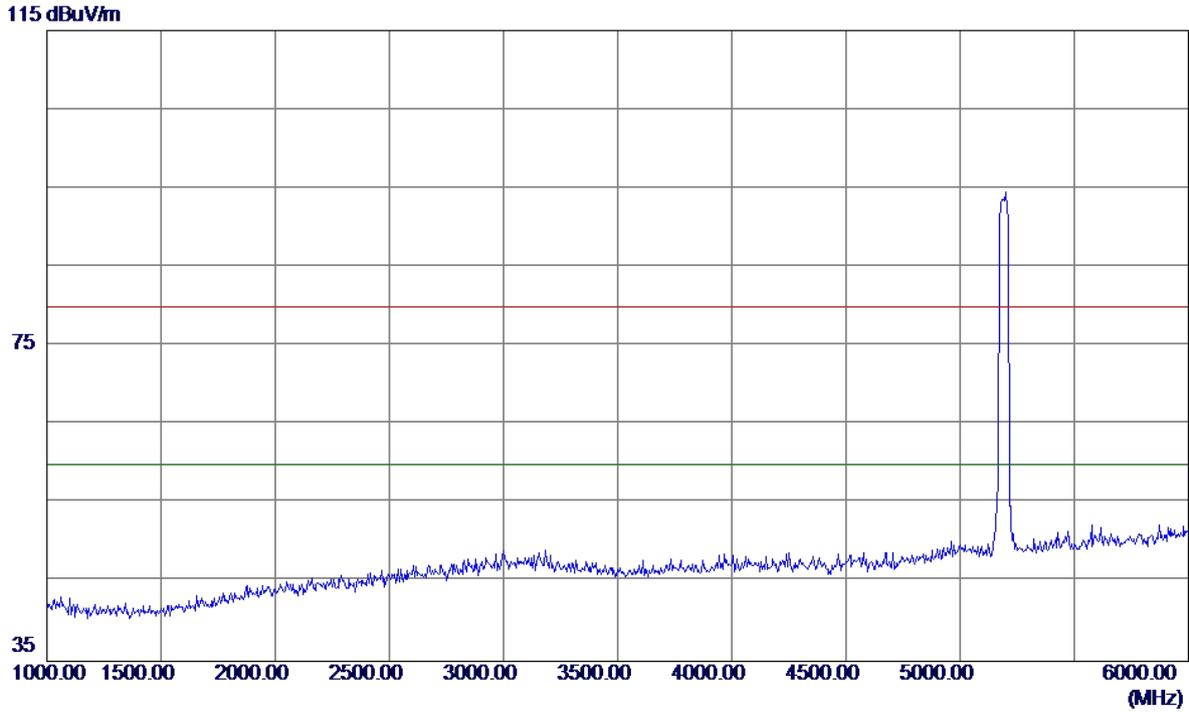

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal

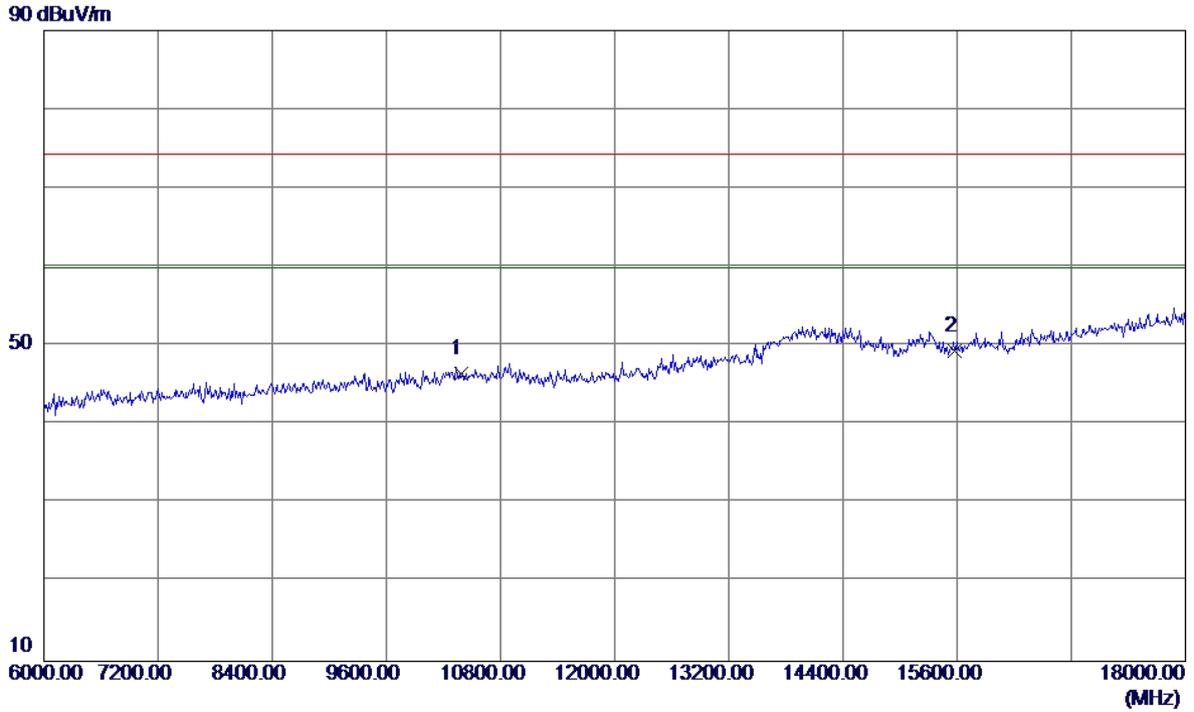


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10380.0000	31.53	15.01	46.54	74.30	-27.76	Peak	
2 *	15570.0000	31.45	17.86	49.31	74.30	-24.99	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal


100 dBuV/m

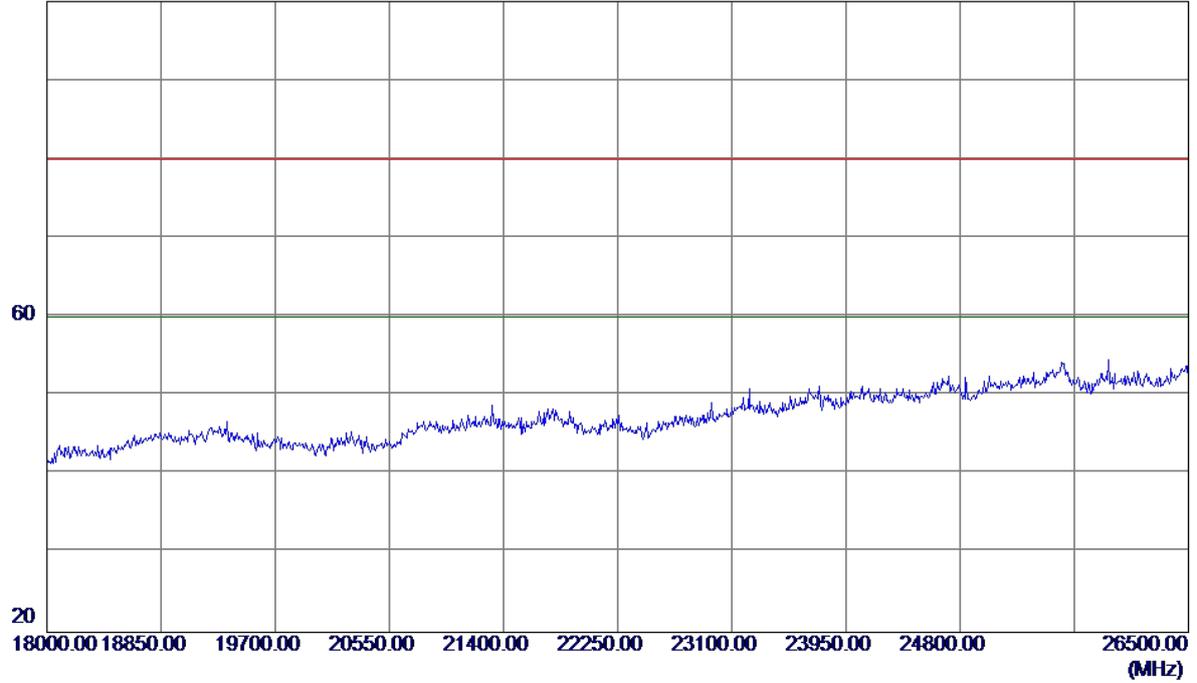

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Horizontal

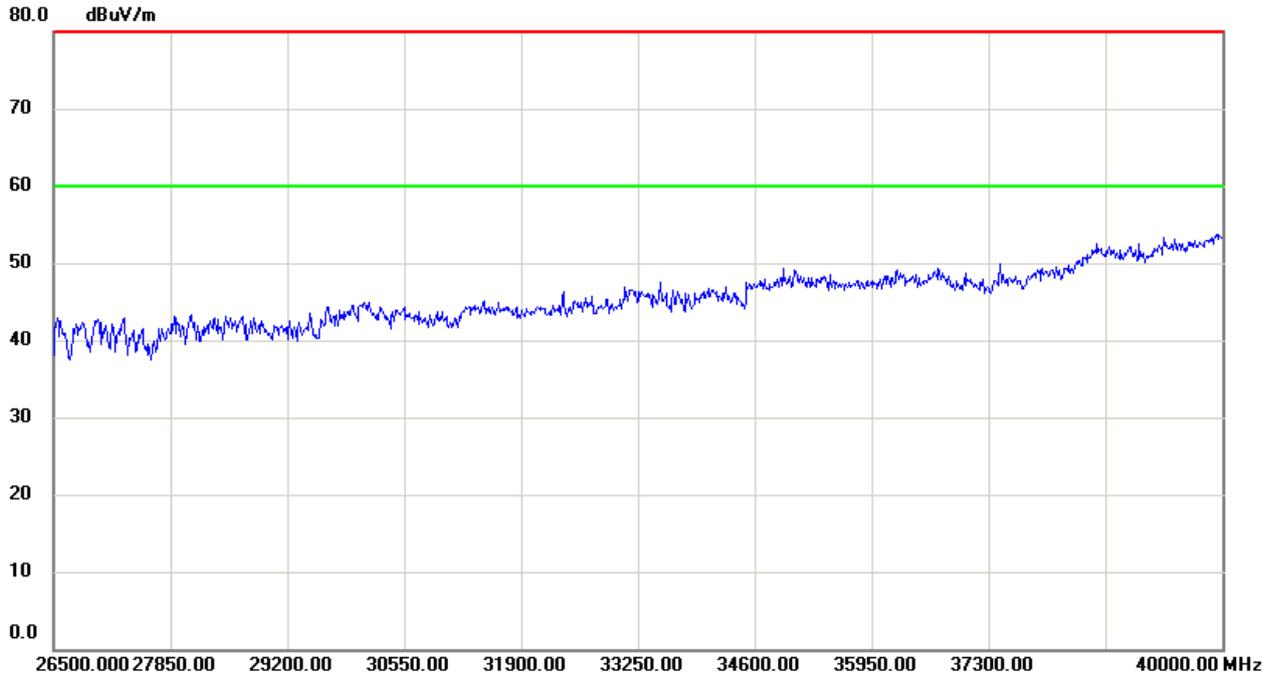

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Vertical

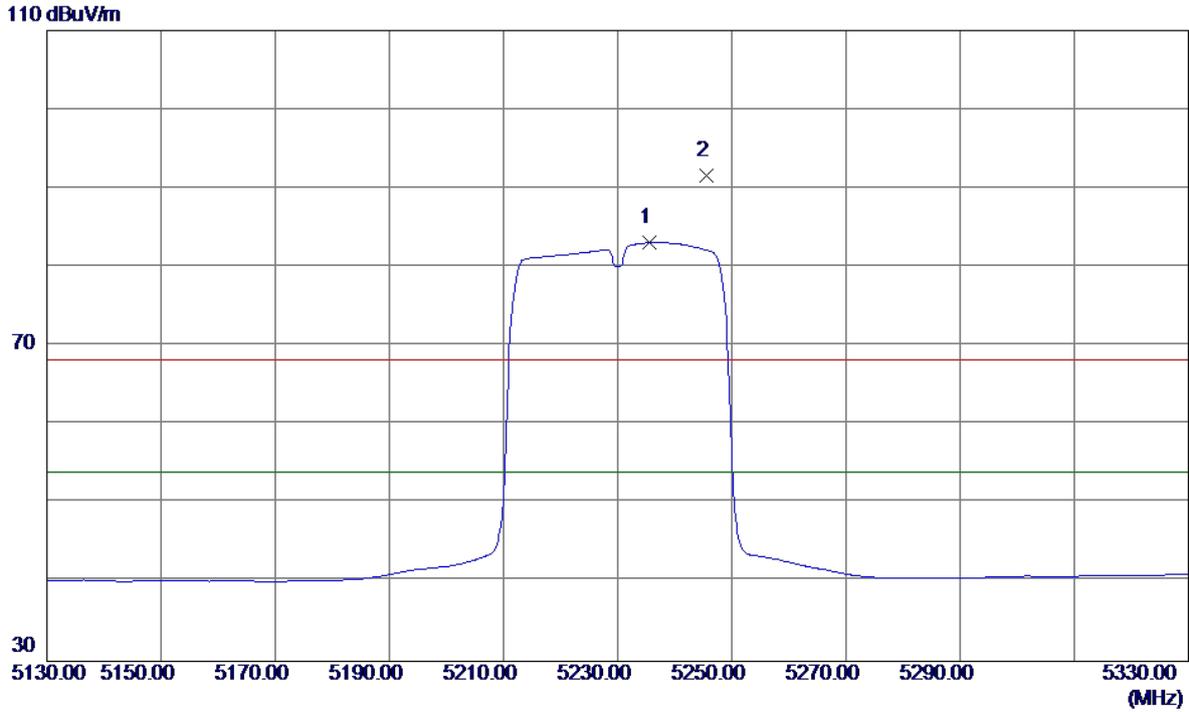

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5235.6000	42.19	40.91	83.10	54.00	29.10	AVG	No Limit
2	5245.6000	50.60	40.94	91.54	68.30	23.24	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Vertical

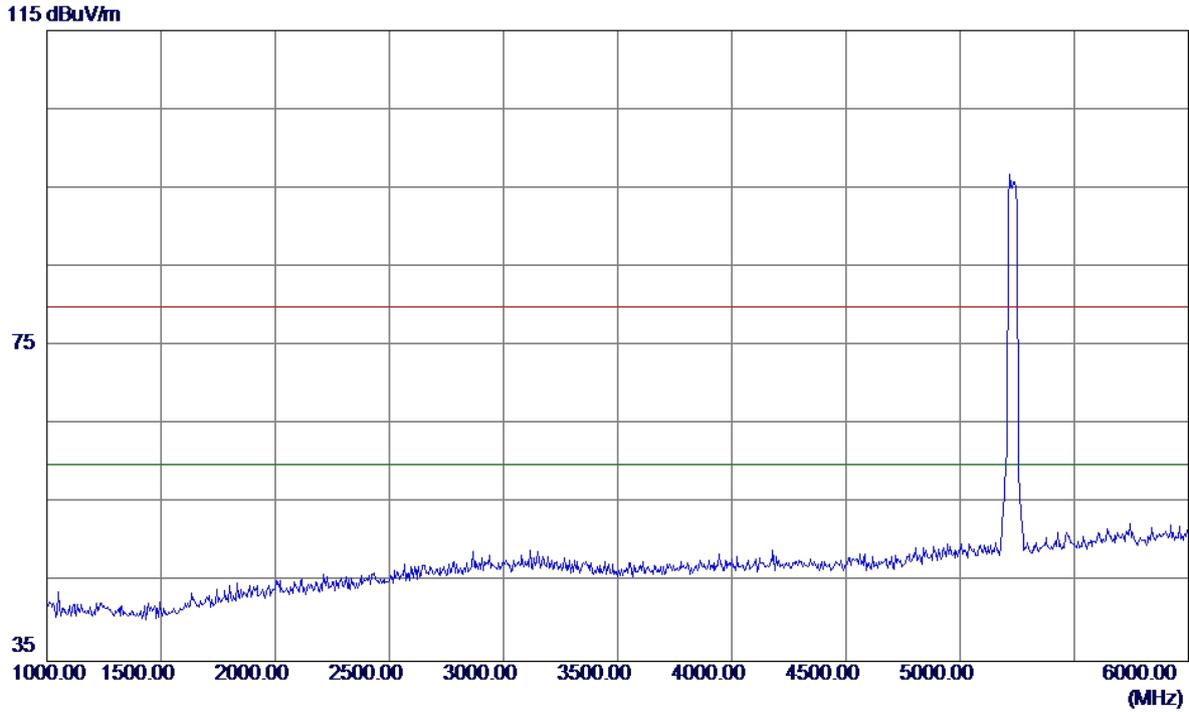

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical

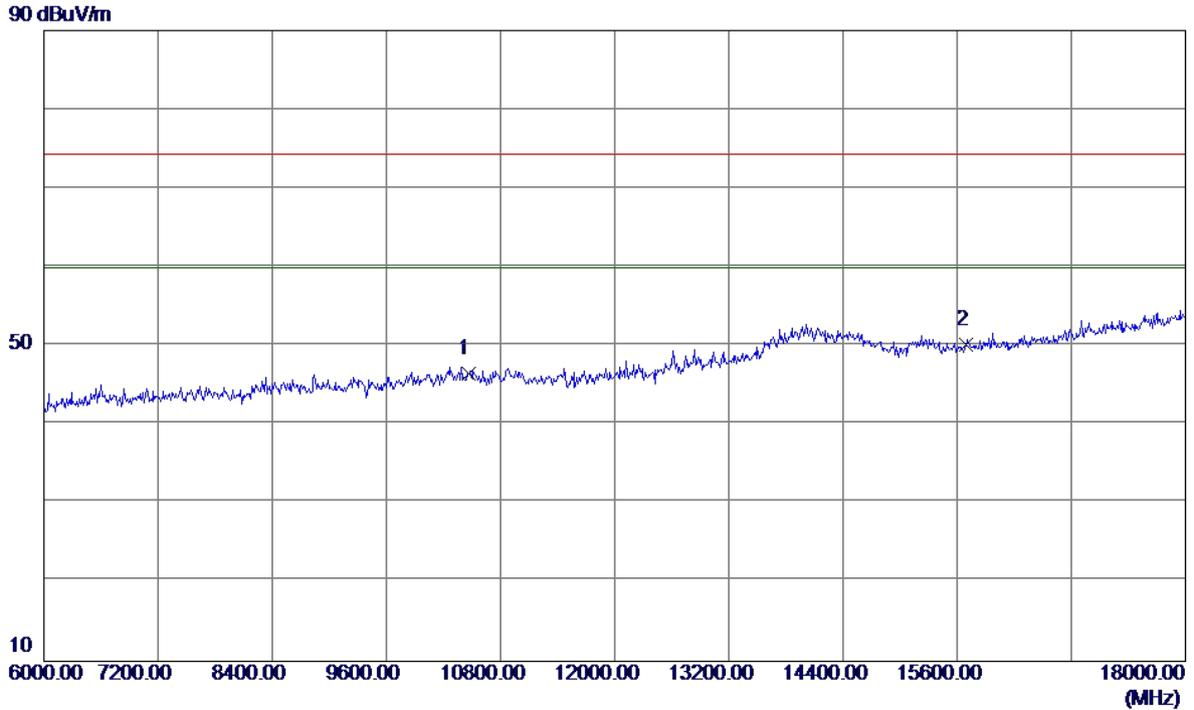

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10460.0000	31.22	15.20	46.42	74.30	-27.88	Peak	
2 *	15690.0000	32.36	17.86	50.22	74.30	-24.08	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical


100 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical

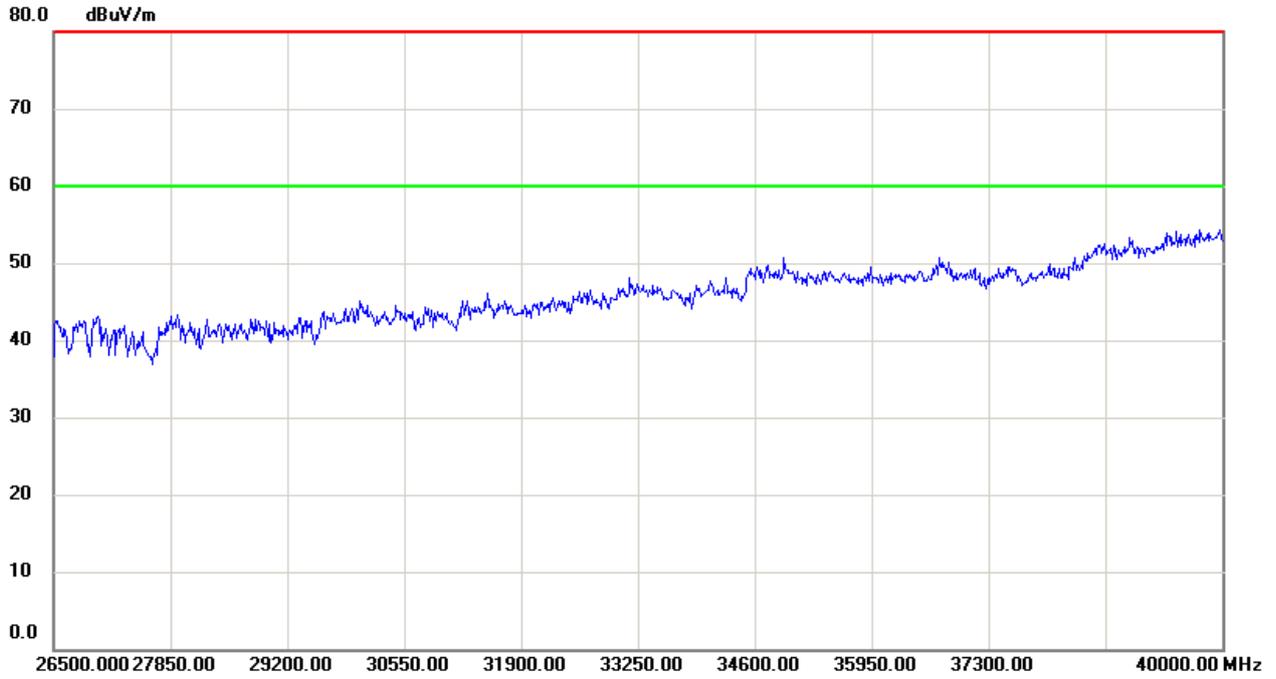

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment