





6.9 11N20\_H@Ant 1


Pref:




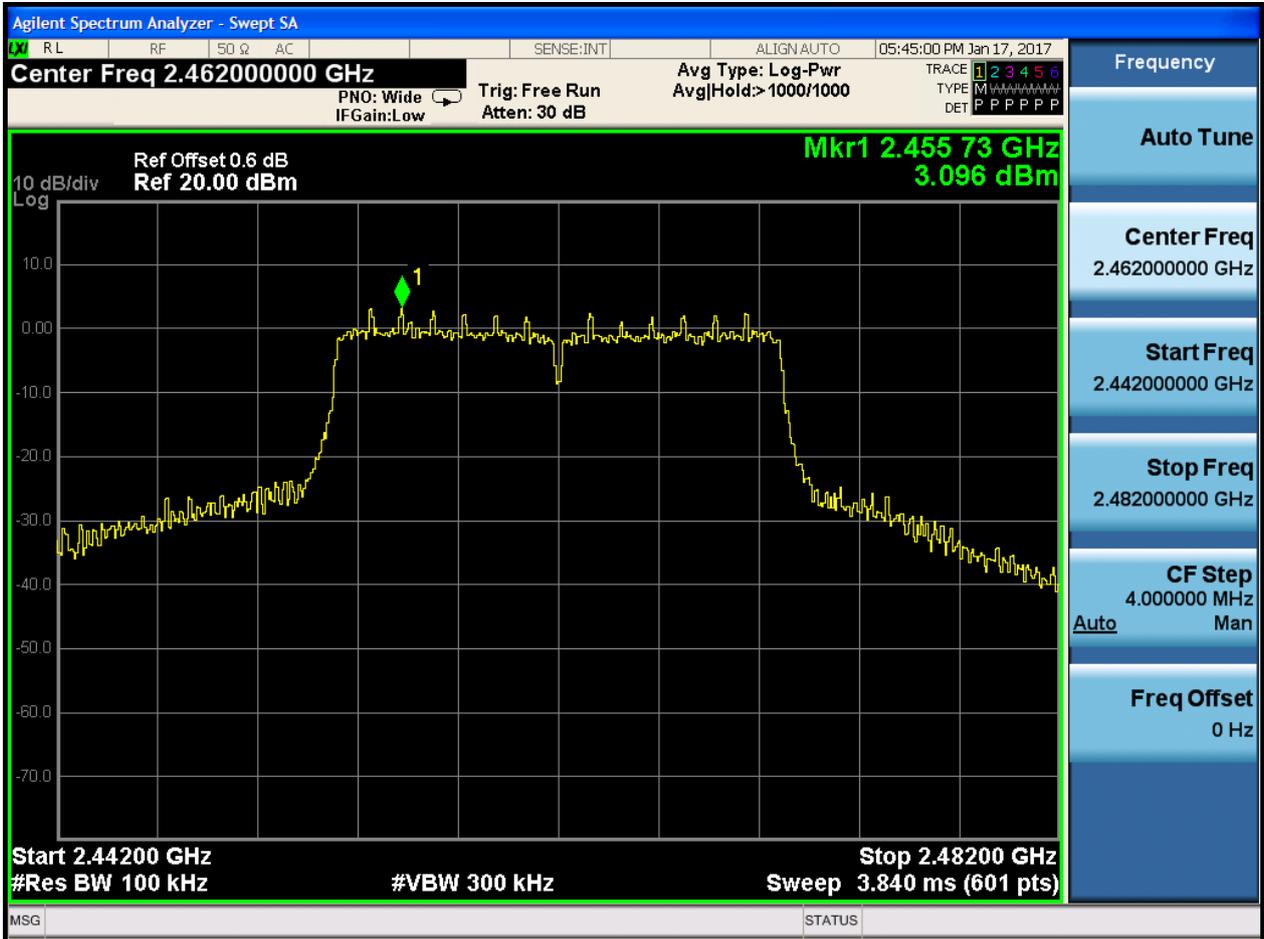



Puw:

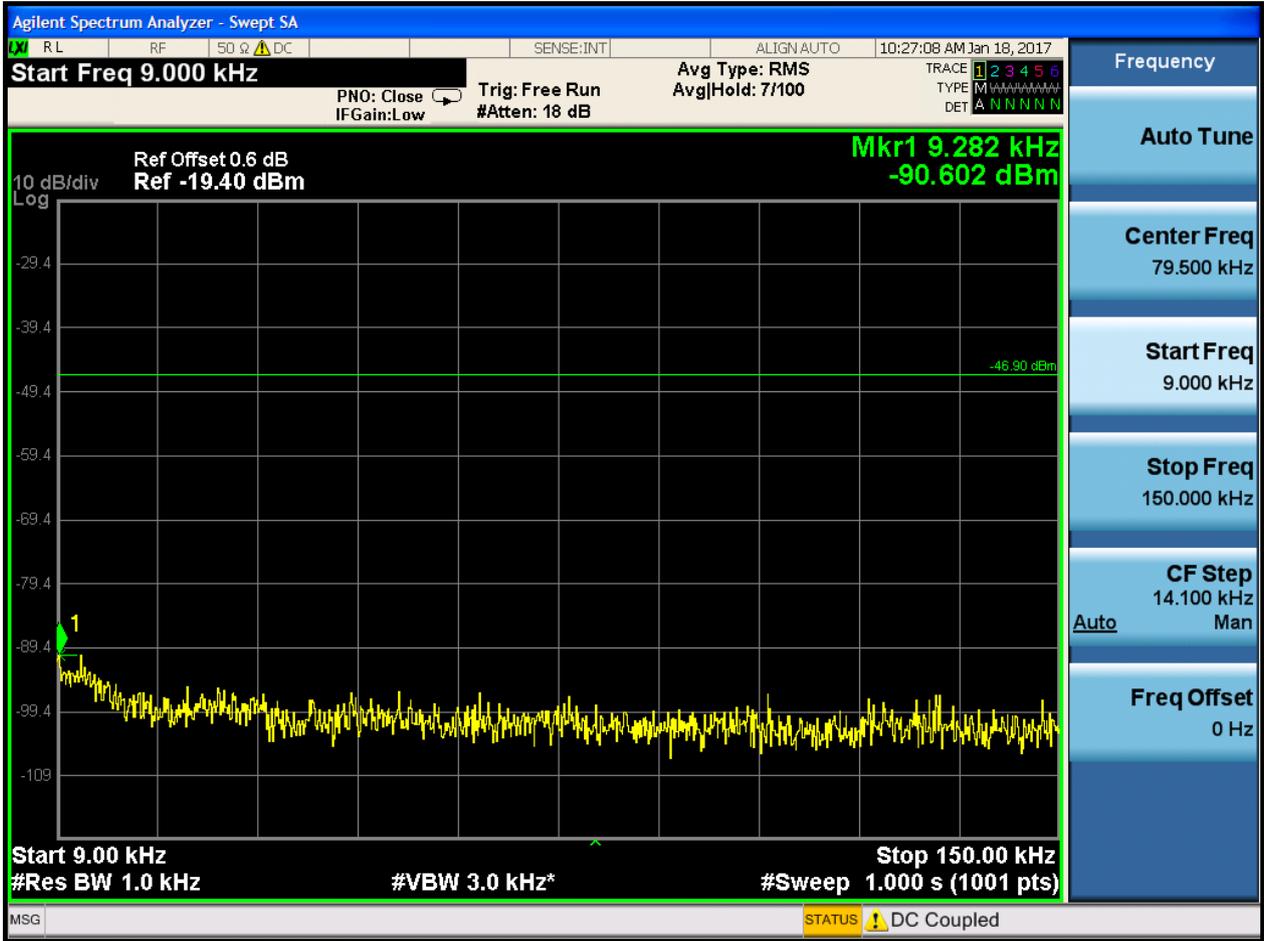


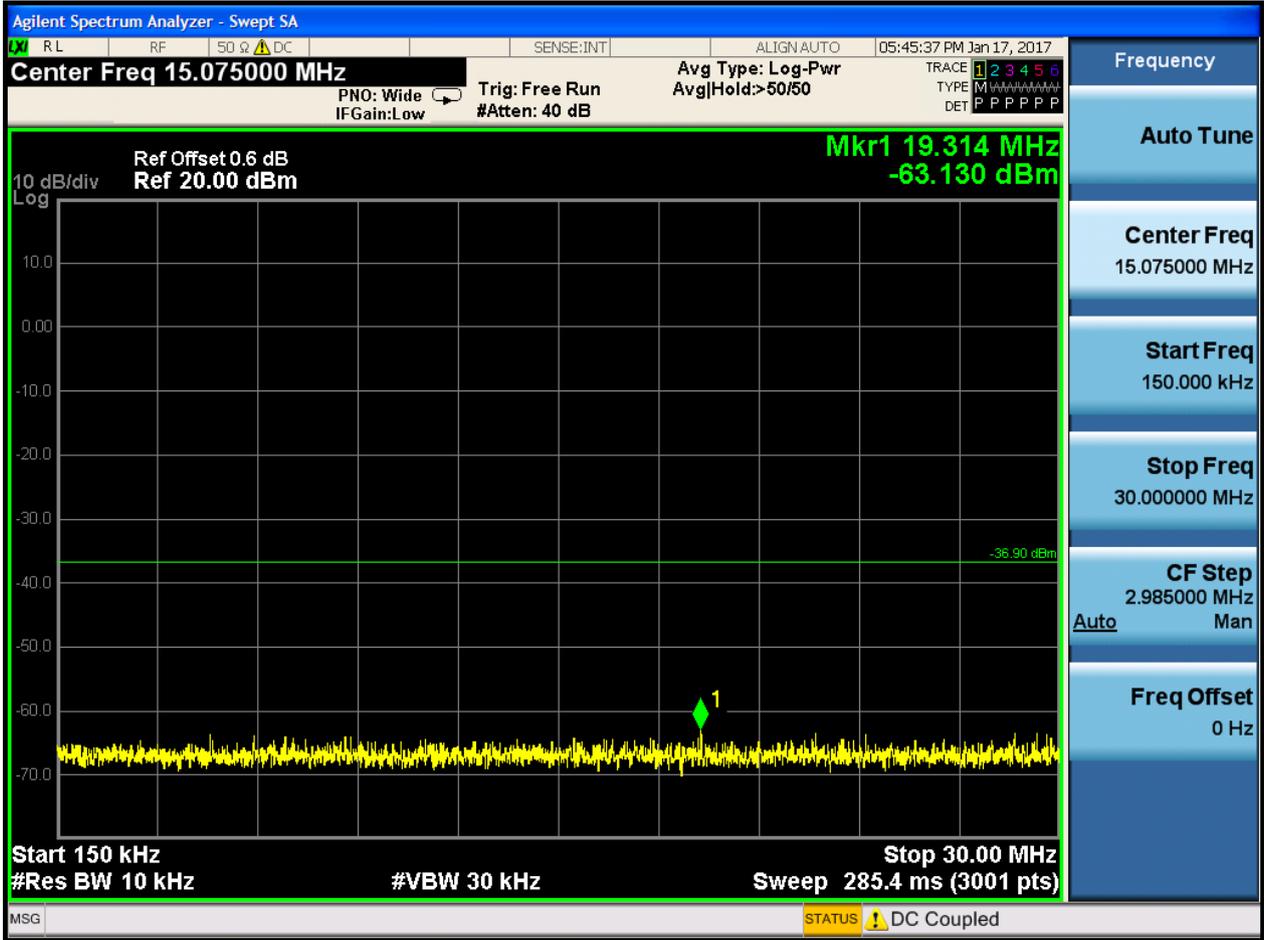

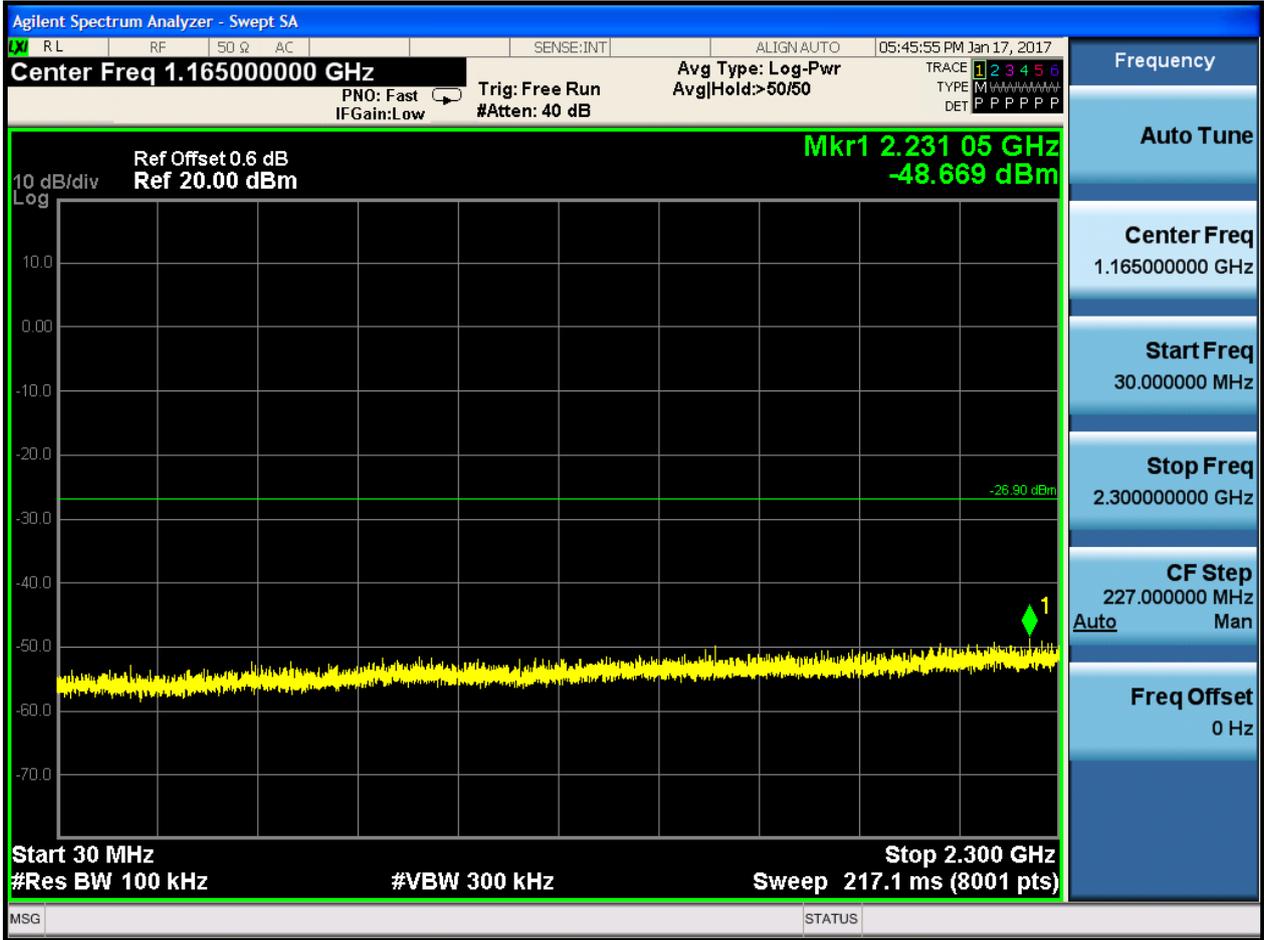

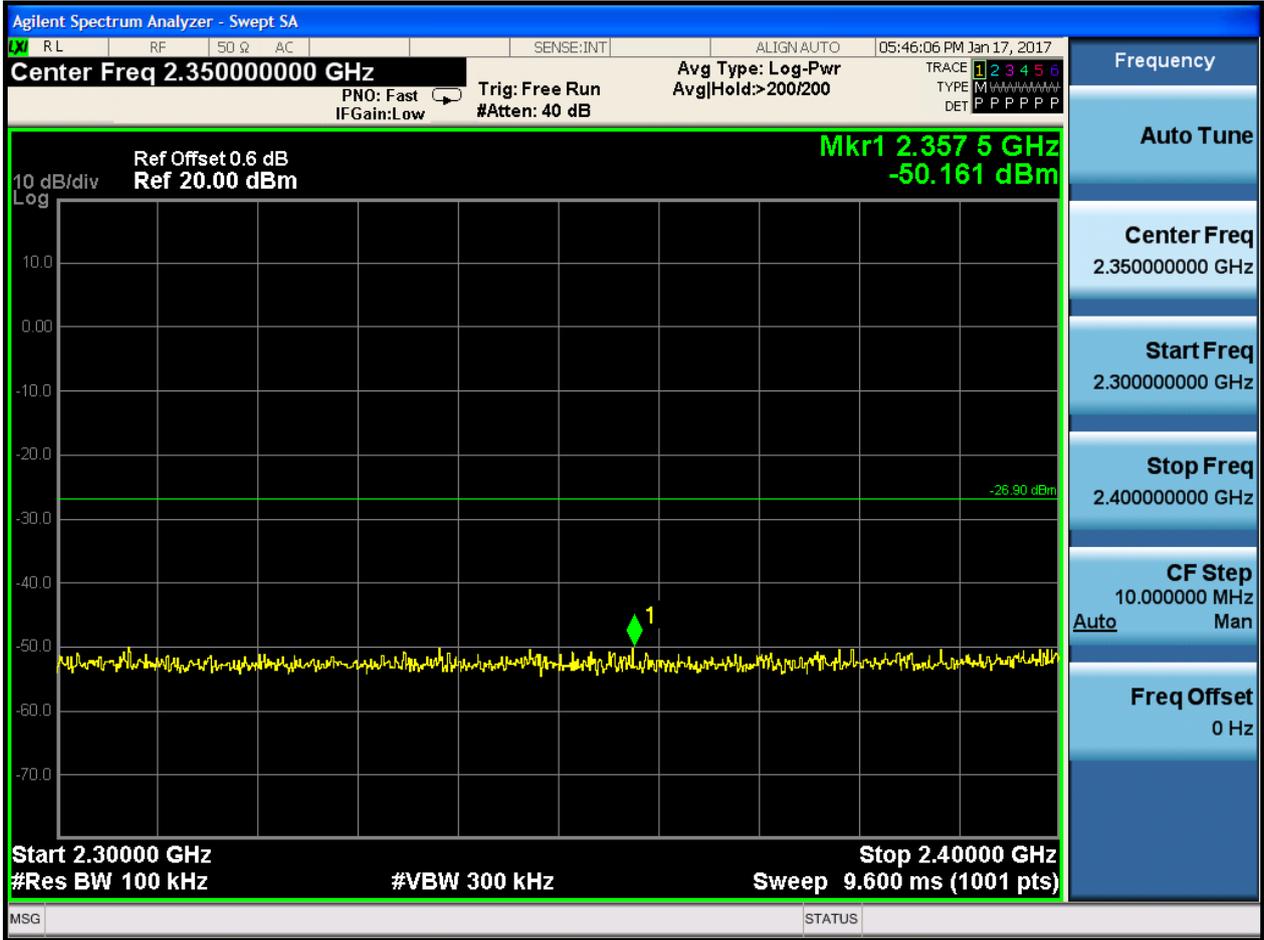

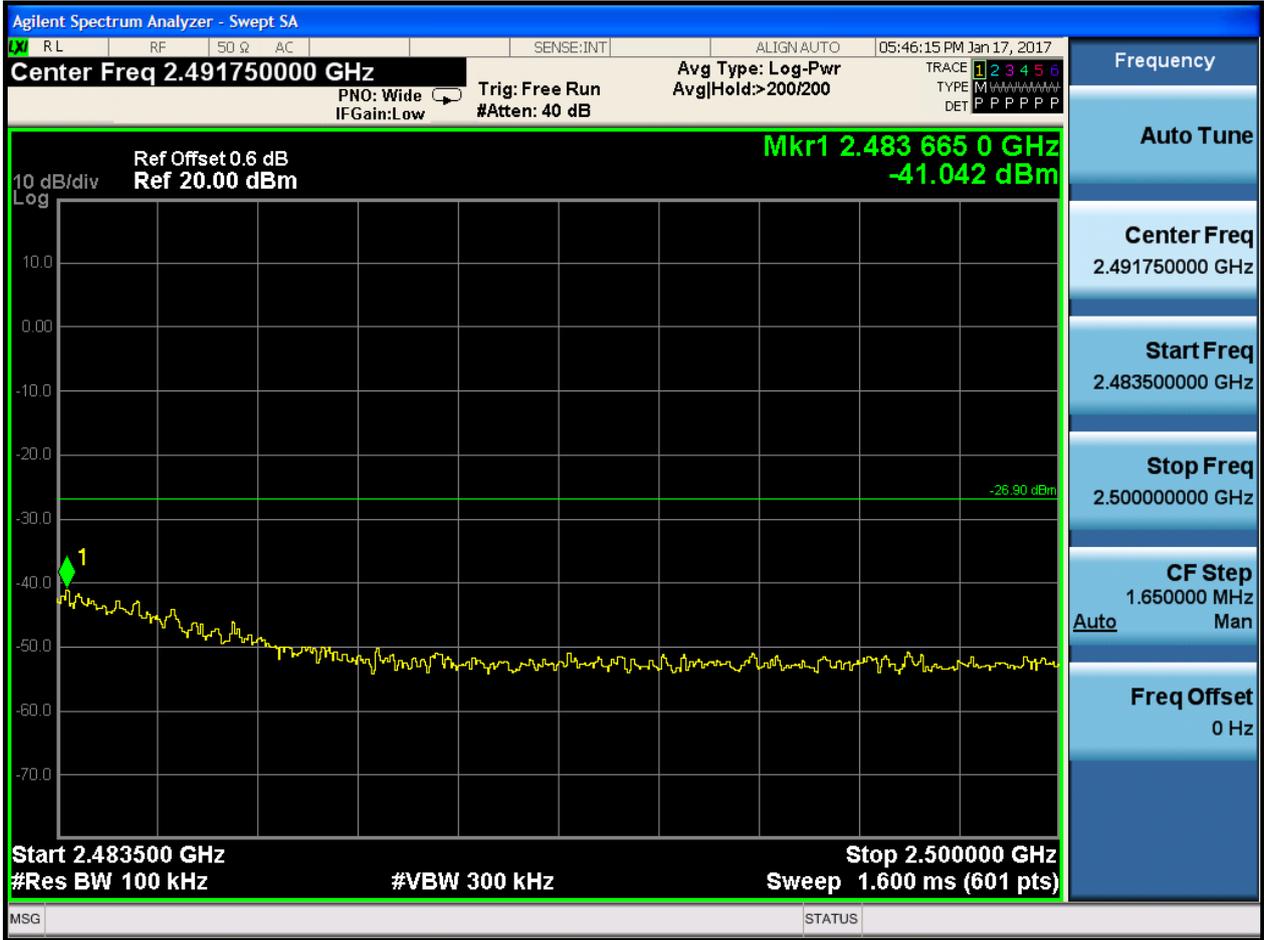


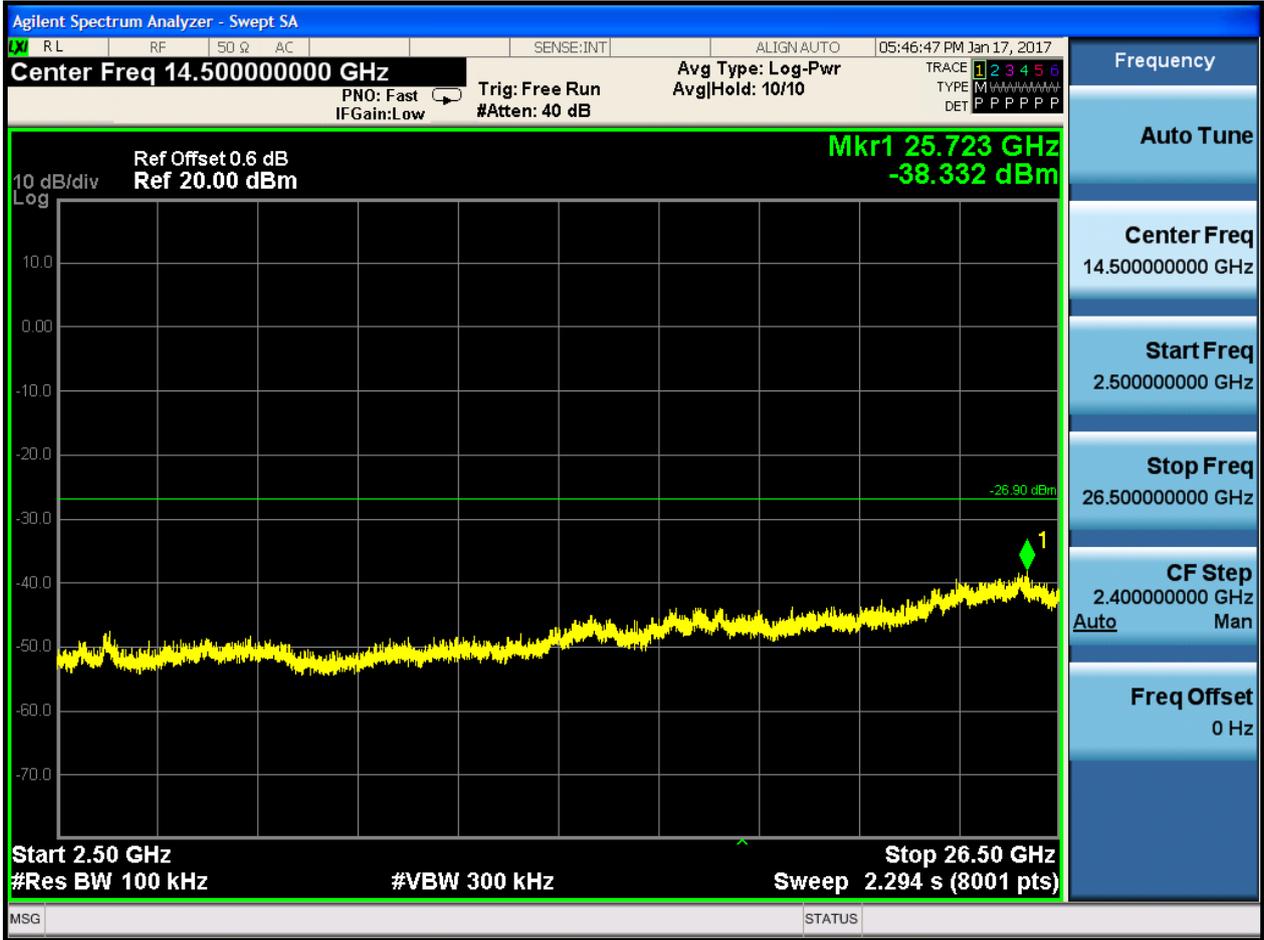




6.10 11N40\_L@Ant 1

Pref:

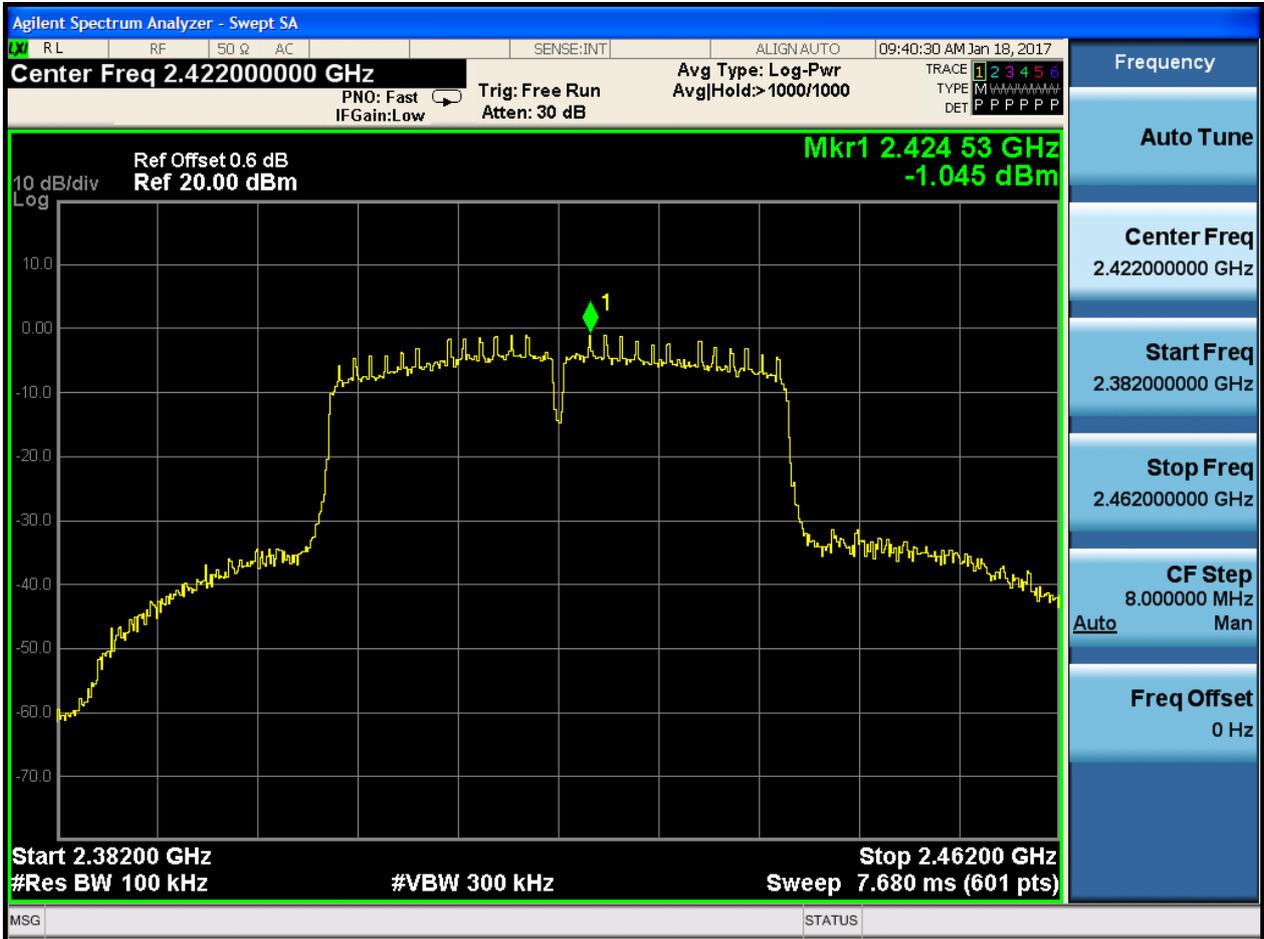





Puw:

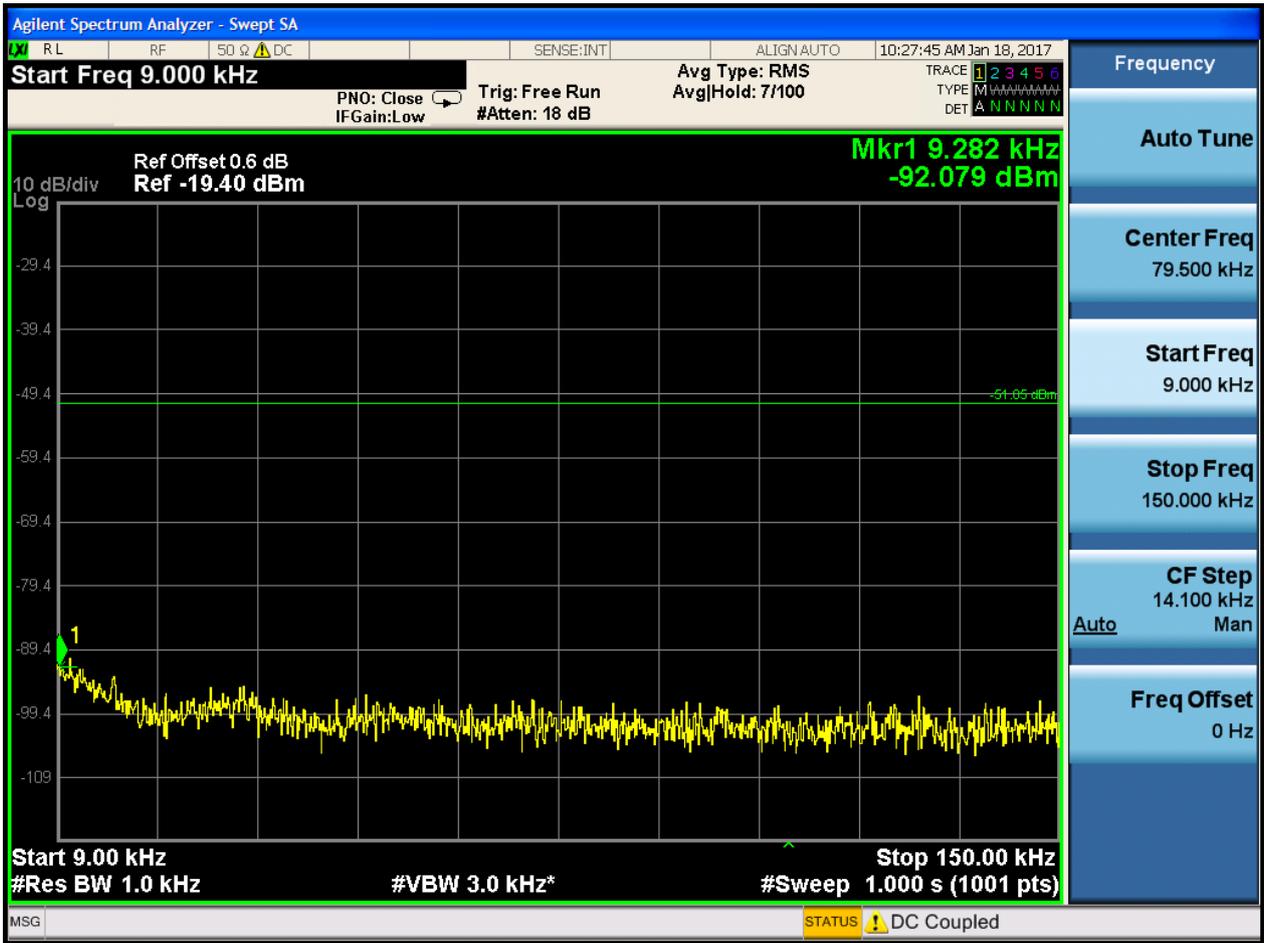



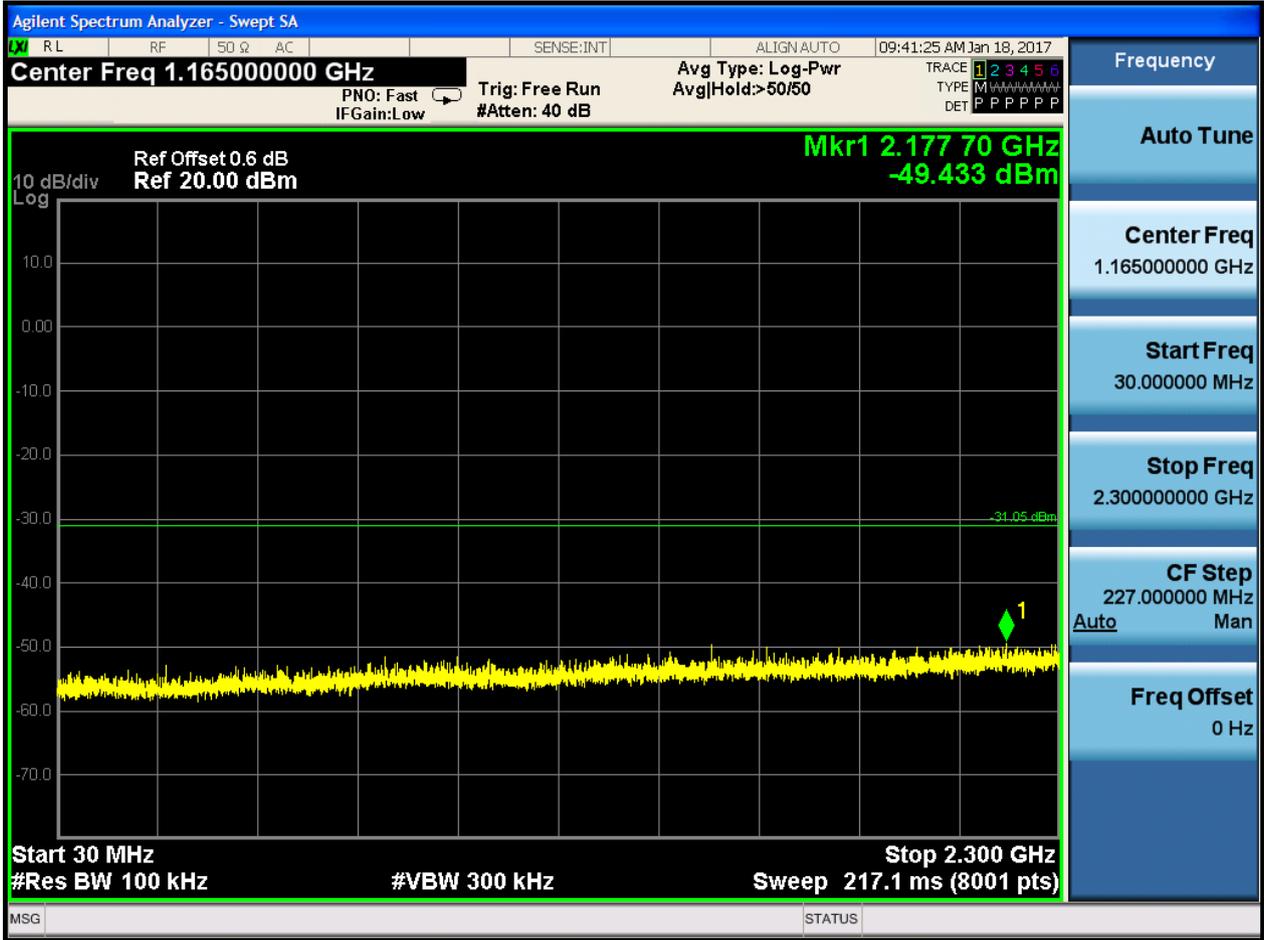



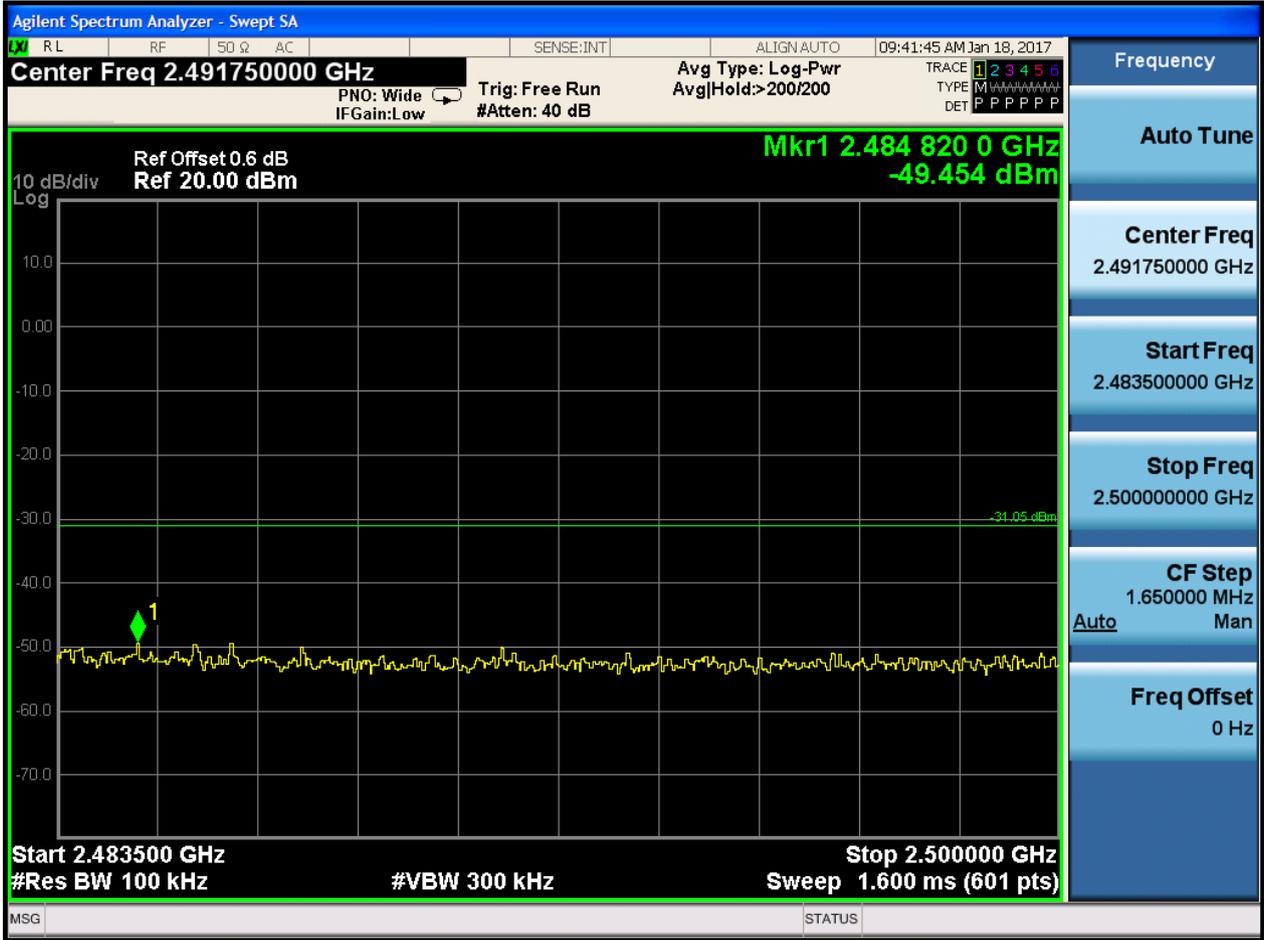







6.11 11N40\_M@Ant 1


Pref:

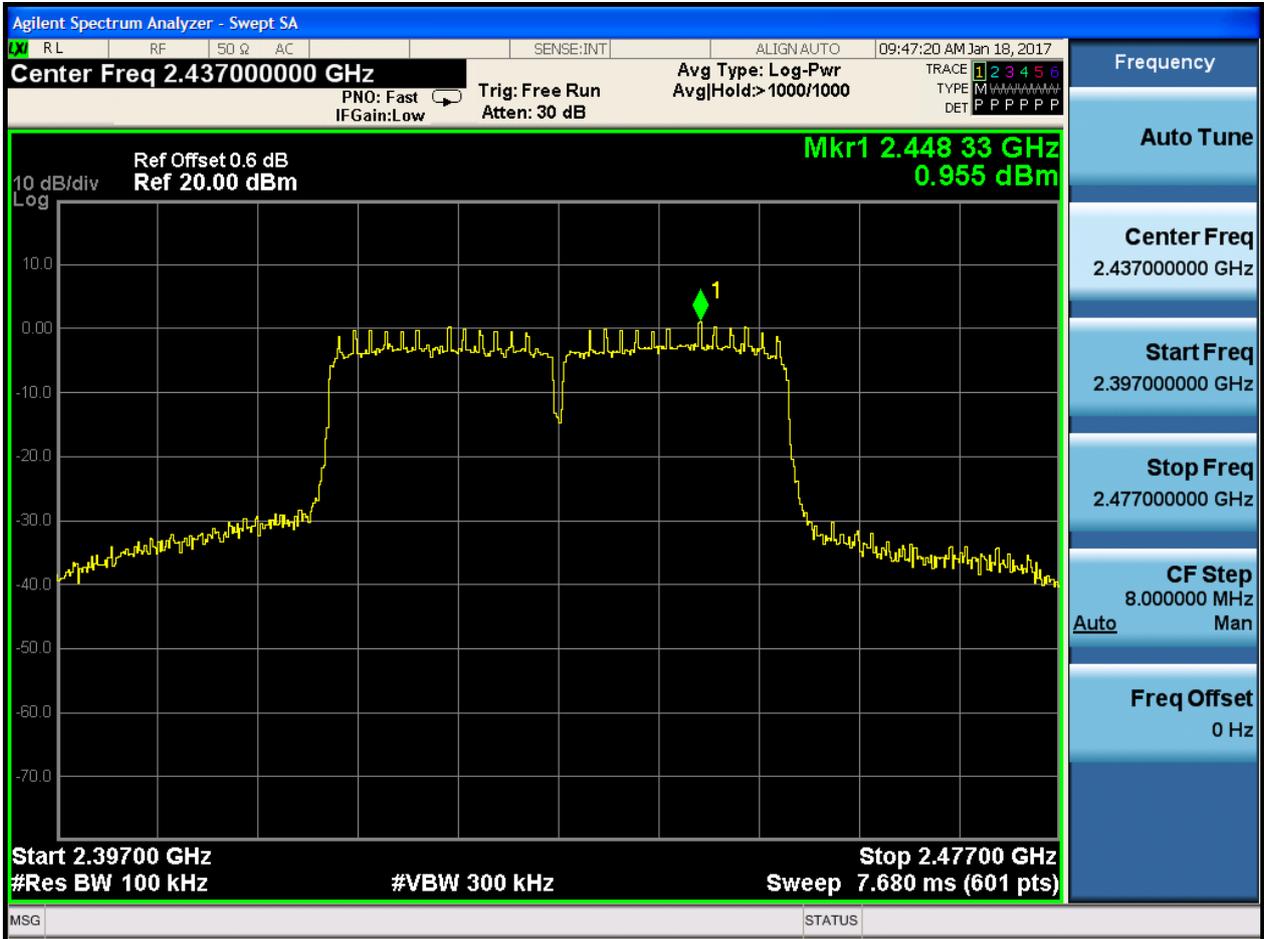





Puw:

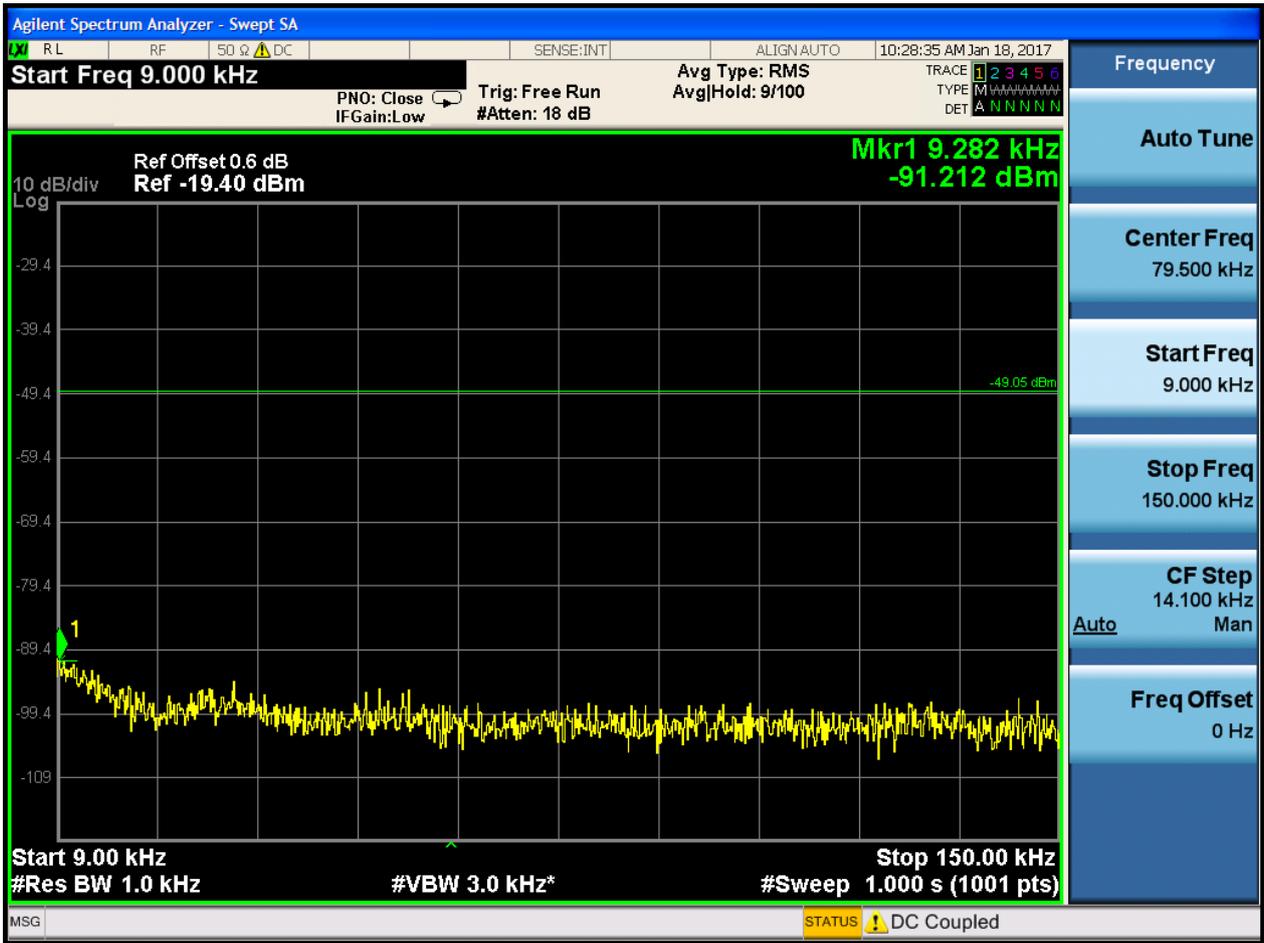

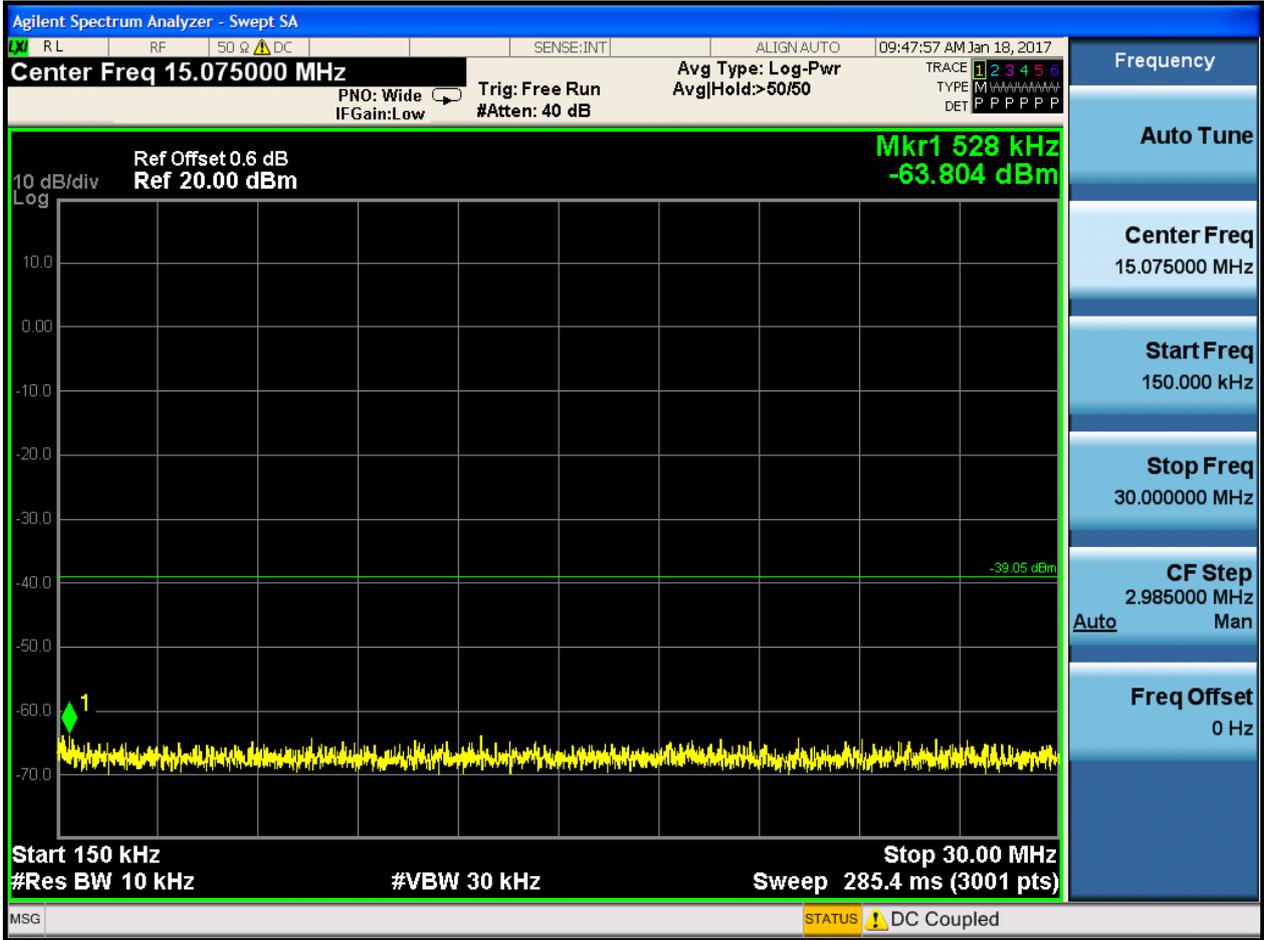

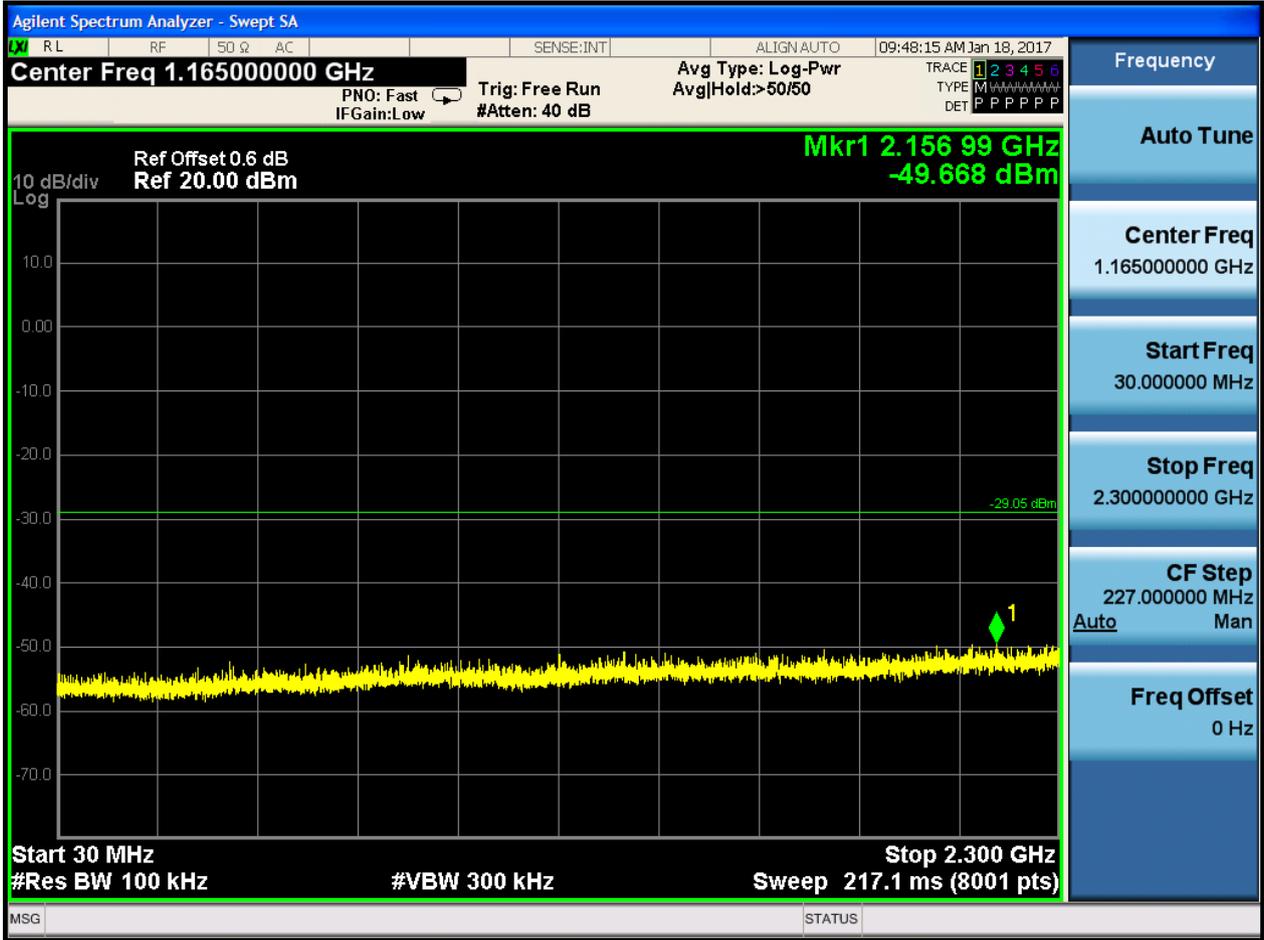

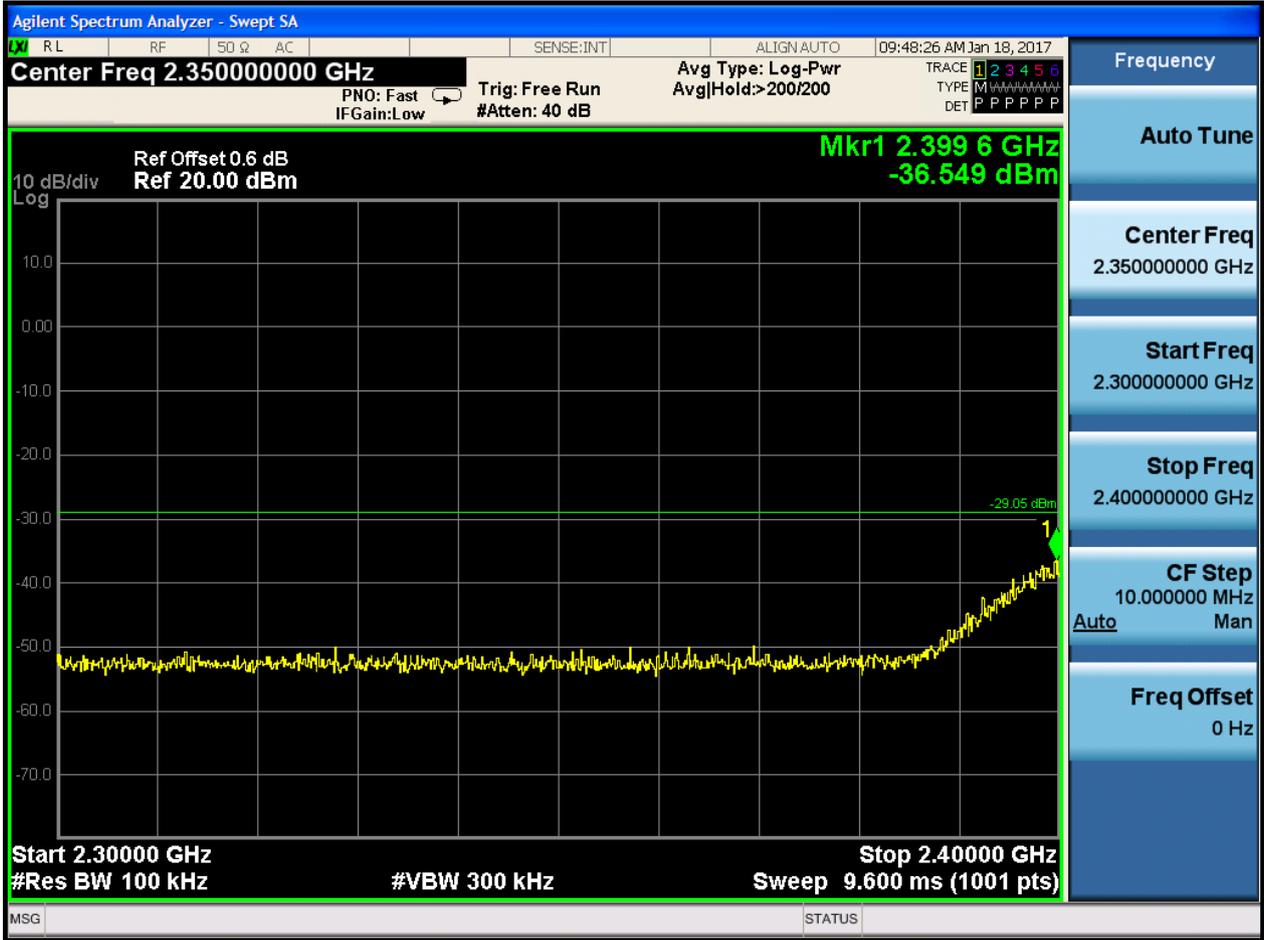












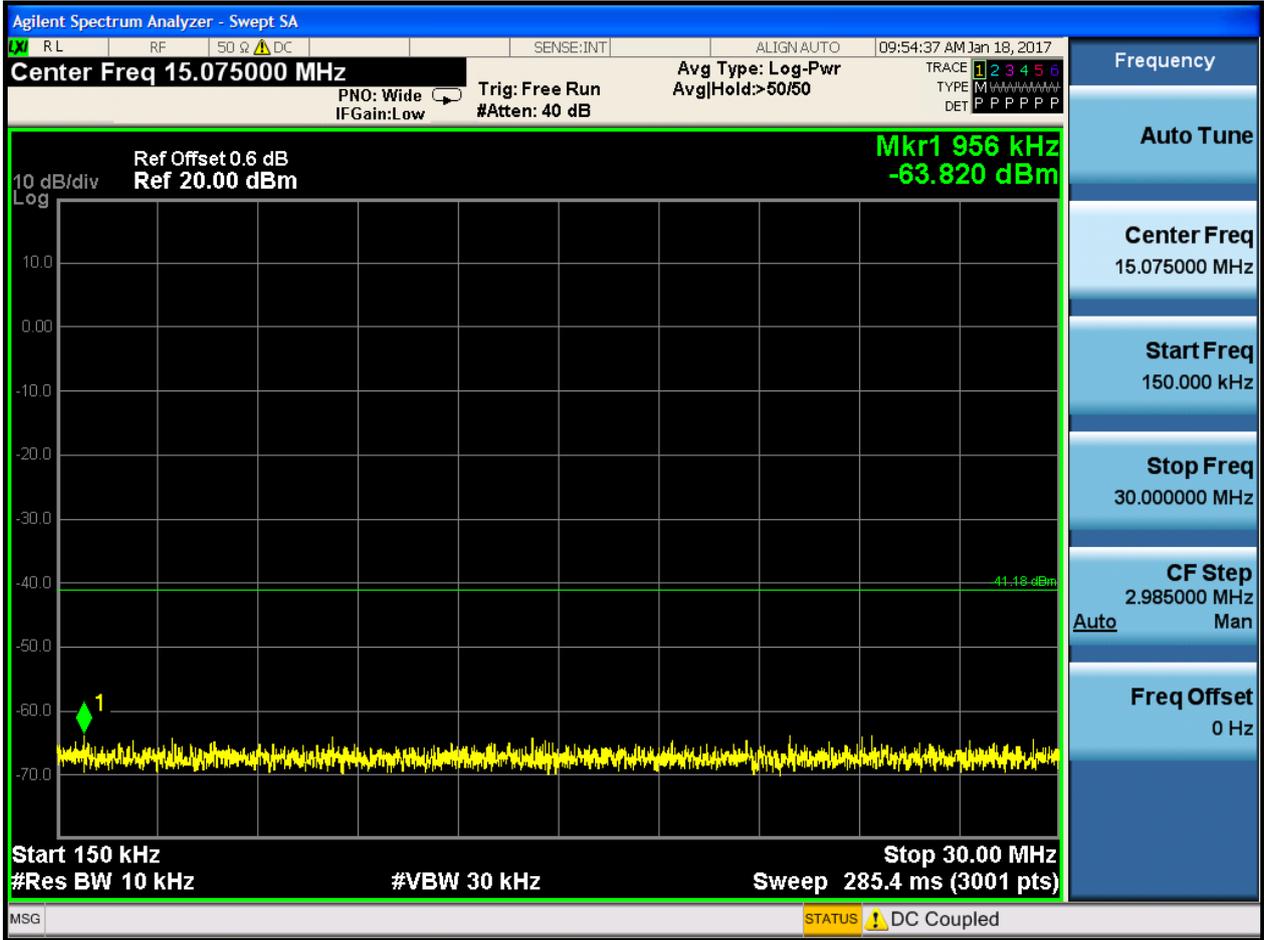



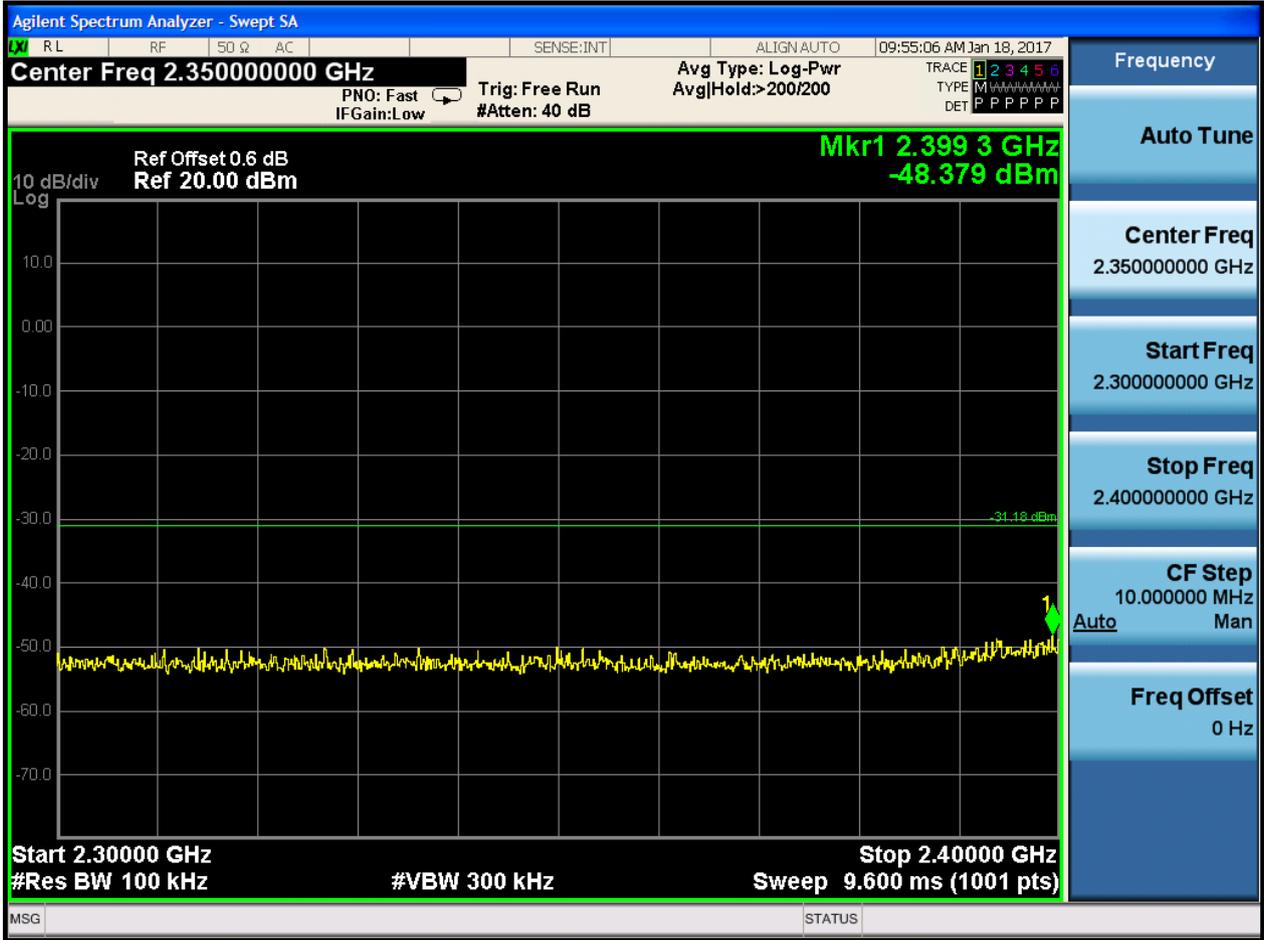

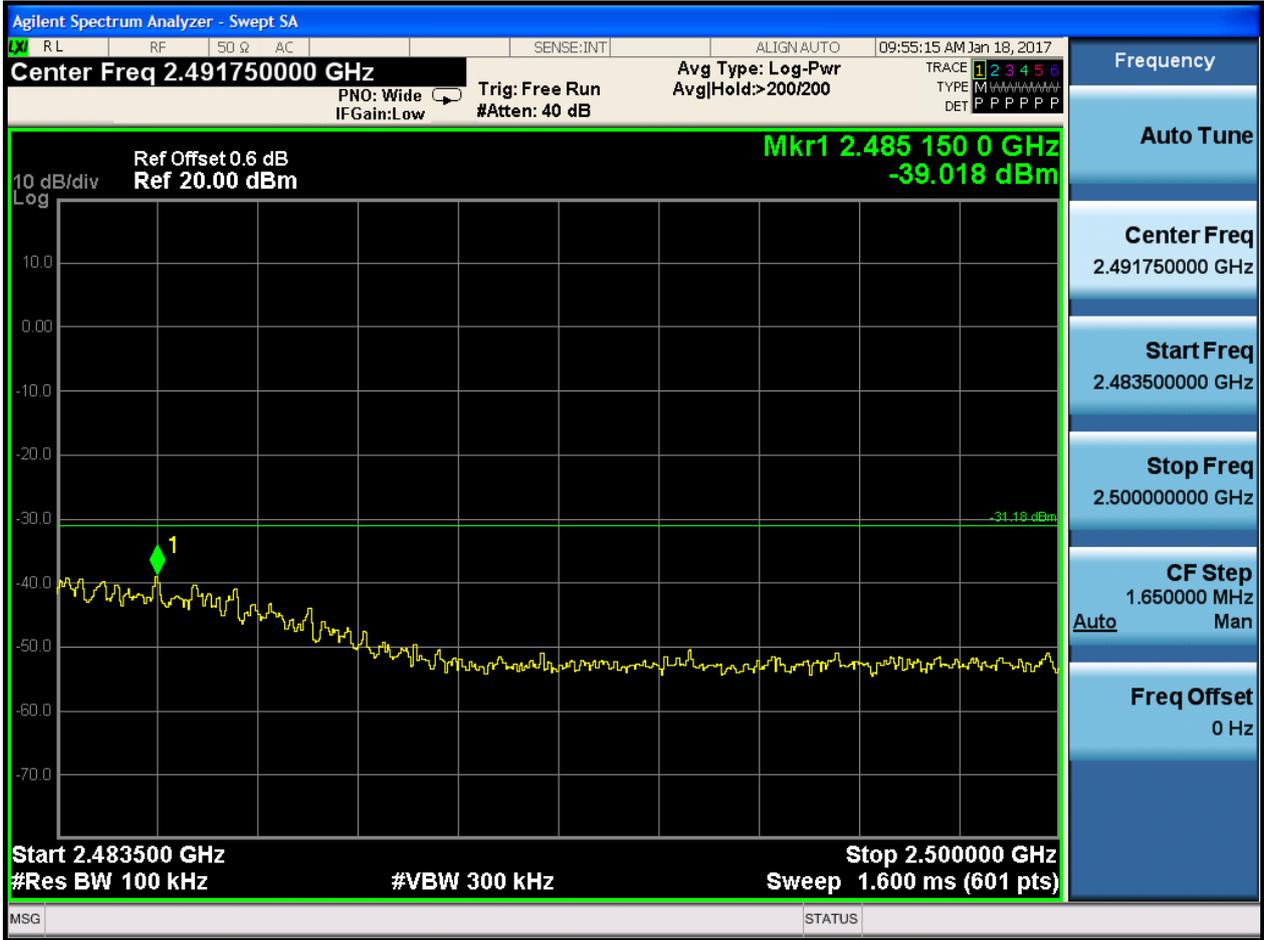





## **Appendix H: Radiated Spurious Emission & Spurious in Restricted Band**

Note: We tested all modes, but the data presented below is the worst case.

Below 1GHz, RBW = 100 kHz, VBW = 300 kHz.

Above 1GHz, RBW = 1 MHz, VBW = 3 MHz.

The simultaneous transmission has been considered


**1.1 Part 1: Testing Range of “9 kHz to 30MHz”**

NOTE1: No peak found in the Test Range of “9 kHz to 30MHz”

**1.2 Part 2: Testing Range of “30 MHz to 1 GHz”**

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

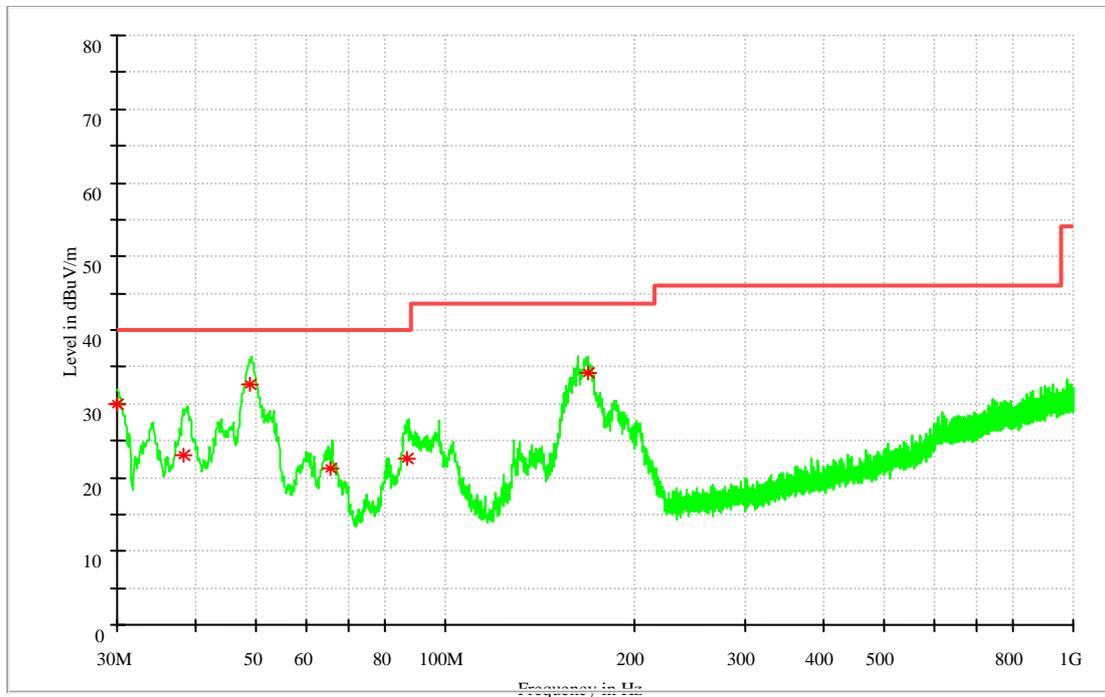

Frequency (MHz)	Level (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
30.049200	30.02	40.00	9.98	100.0	V	162.0	14.6
38.414800	23.05	40.00	16.95	173.0	V	202.0	15.4
48.978800	32.73	40.00	7.27	100.0	V	272.0	15.2
65.651850	21.24	40.00	18.76	100.0	V	283.0	11.9
87.132400	22.66	40.00	17.34	145.0	V	113.0	11.7
168.478800	34.19	43.50	9.31	100.0	V	232.0	11.0

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

**1.3Part 3: Testing Range of “1 GHz to 3 GHz”**

Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.


Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dBμV/m) and Average Limit (54 dBμV/m).

Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

Test Mode:

**1.3.1Test Mode: 11B**

**1.3.1.1 Channel 1 @Ant 1**

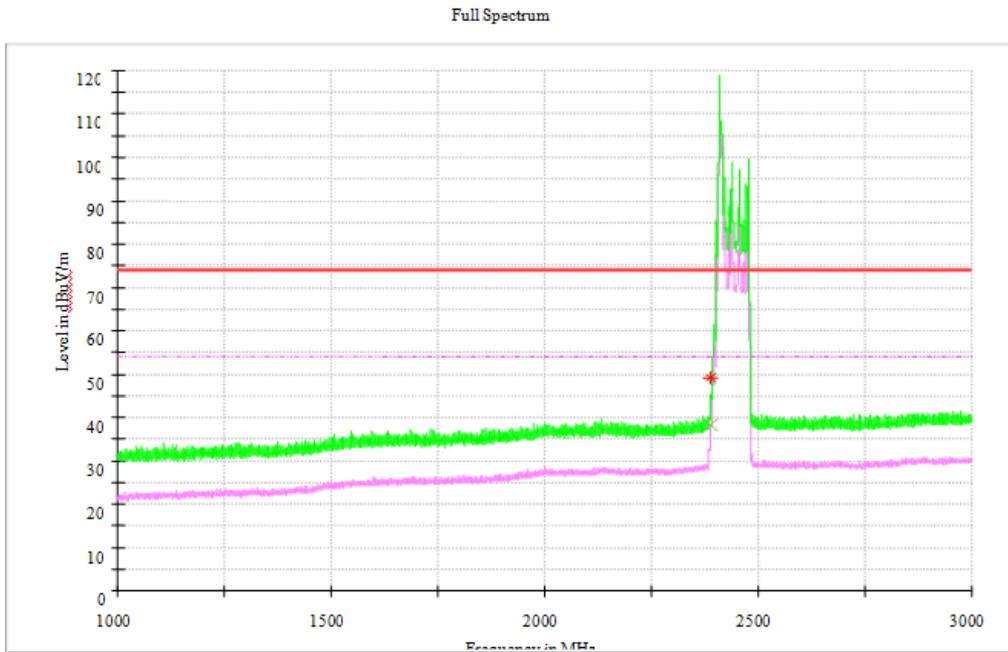

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	38.38	54.00	15.62	100.0	H	226.0	-7.6

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	49.09	74.00	24.91	100.0	H	225.0	-7.6


Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.1.2 Channel 11@Ant 1

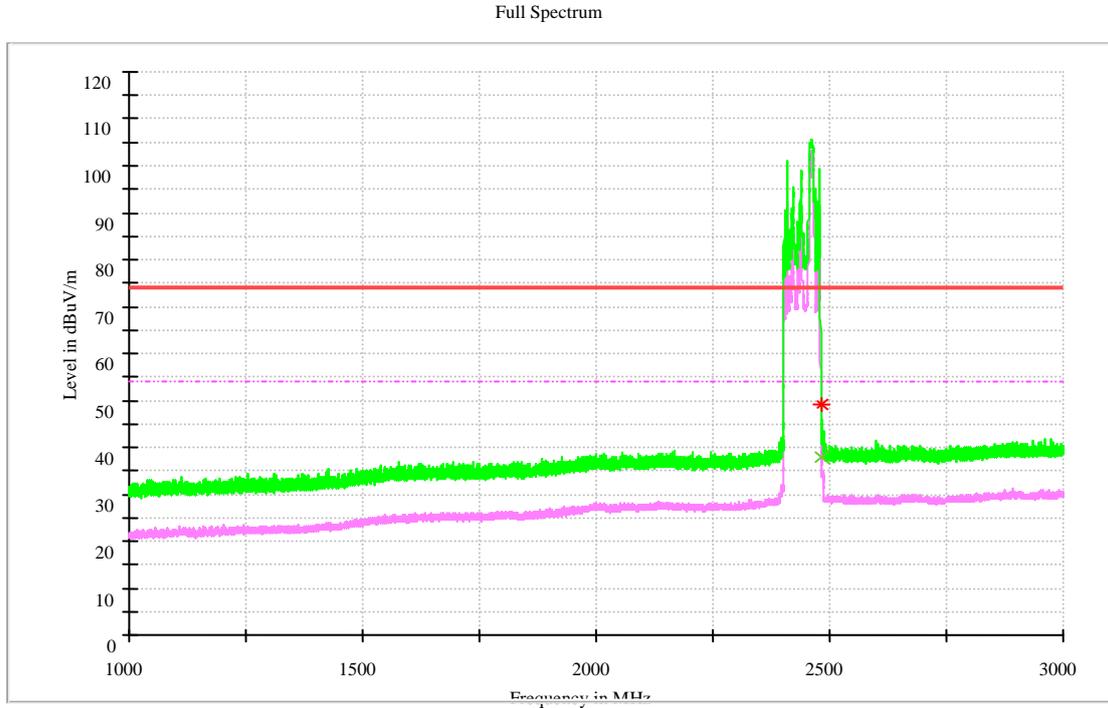

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	37.94	54.00	16.06	150.0	H	226.0	-5.4

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	49.18	74.00	24.82	150.0	H	226.0	-5.4

Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.2 Test Mode: 11G

1.3.2.1 Channel 1 @Ant 1

Full Spectrum

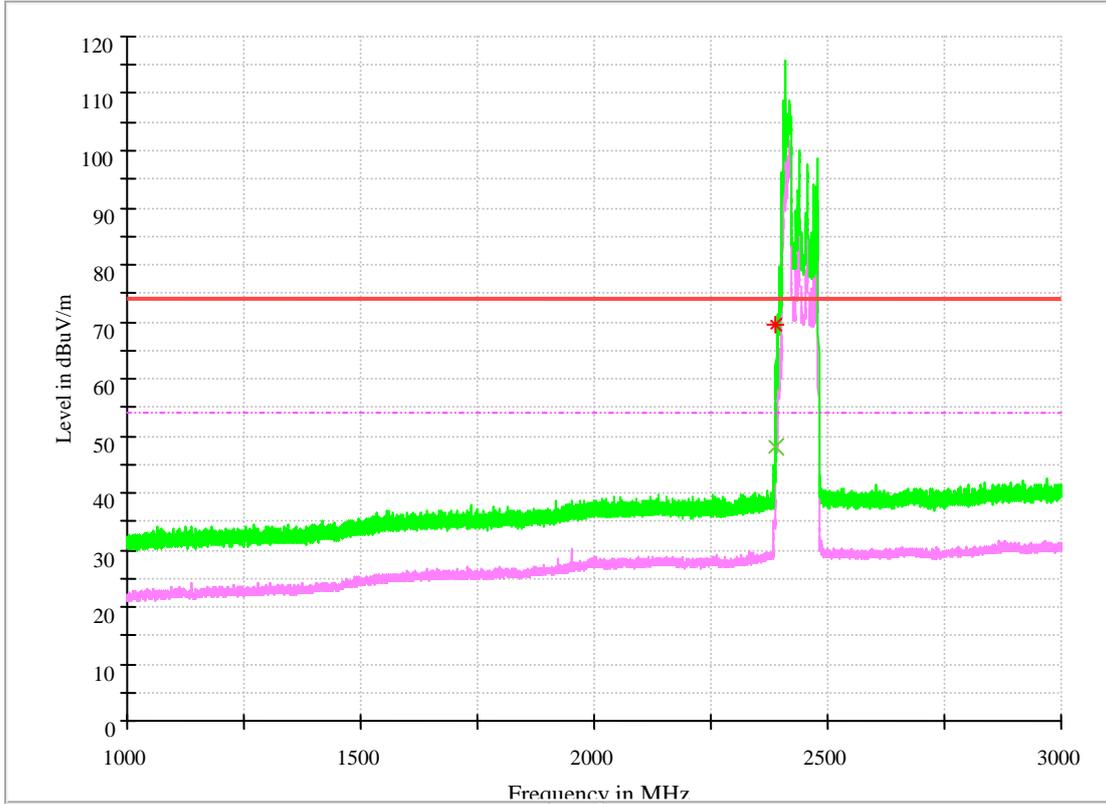

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	47.96	54.00	6.04	100.0	H	225.0	-7.6

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	69.50	74.00	4.50	116.0	H	225.0	-7.6

Note2:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.2.2 Channel 11@Ant 1

Full Spectrum

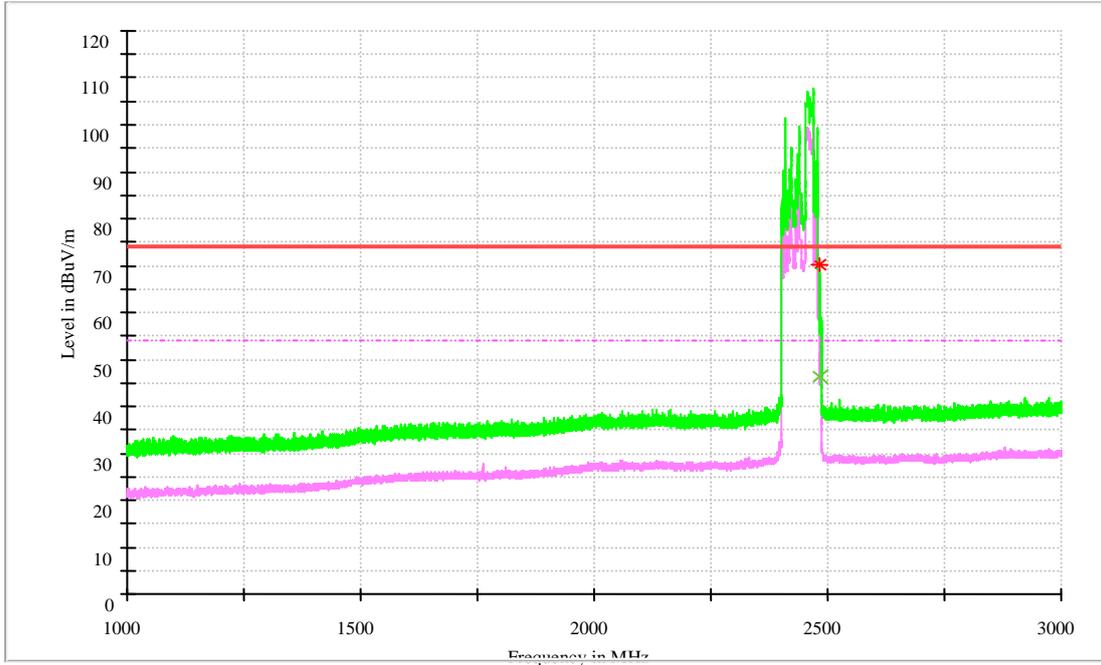

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	46.34	54.00	7.66	141.0	H	227.0	-5.4

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	69.13	74.00	4.87	100.0	H	226.0	-5.4

Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

**1.3.3 Test Mode: 11N20**

**1.3.3.1 Channel 1 @Ant 1**

Full Spectrum

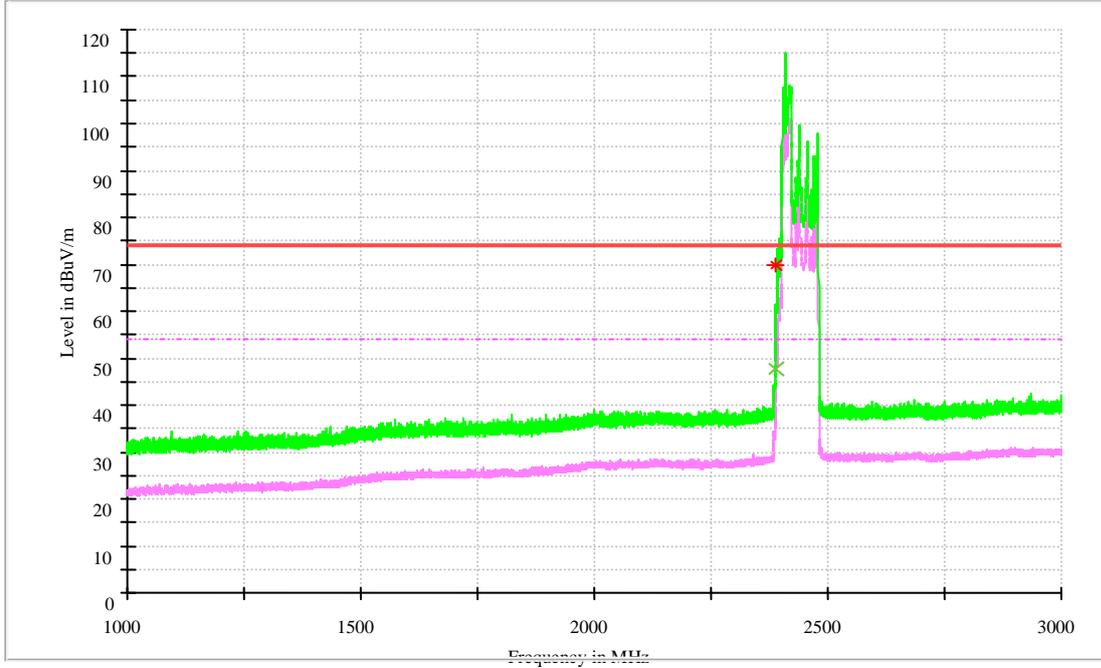

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	47.68	54.00	6.32	100.0	H	225.0	-7.6

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	69.79	74.00	4.21	100.0	H	225.0	-7.6

Note2:


1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.3.2 Channel 11@Ant 1

Full Spectrum

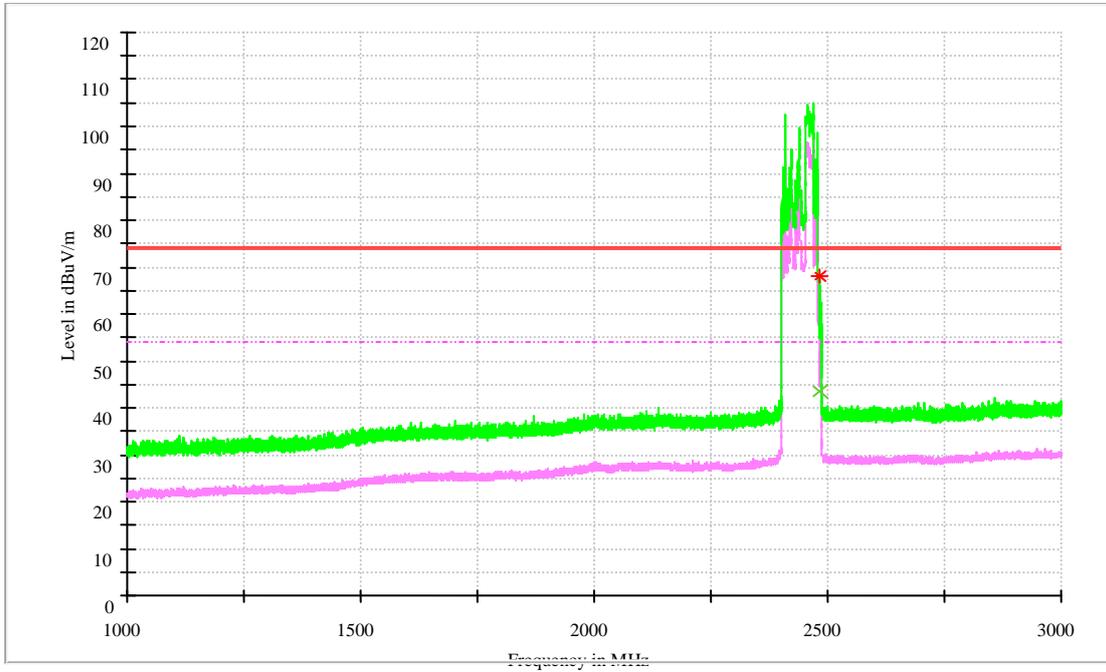

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	43.57	54.00	10.43	100.0	V	180.0	-5.4

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	67.93	74.00	6.07	117.0	V	179.0	-5.4

Note2:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

**1.3.4 Test Mode: 11N40**

**1.3.4.1 Channel 3 @Ant 1**

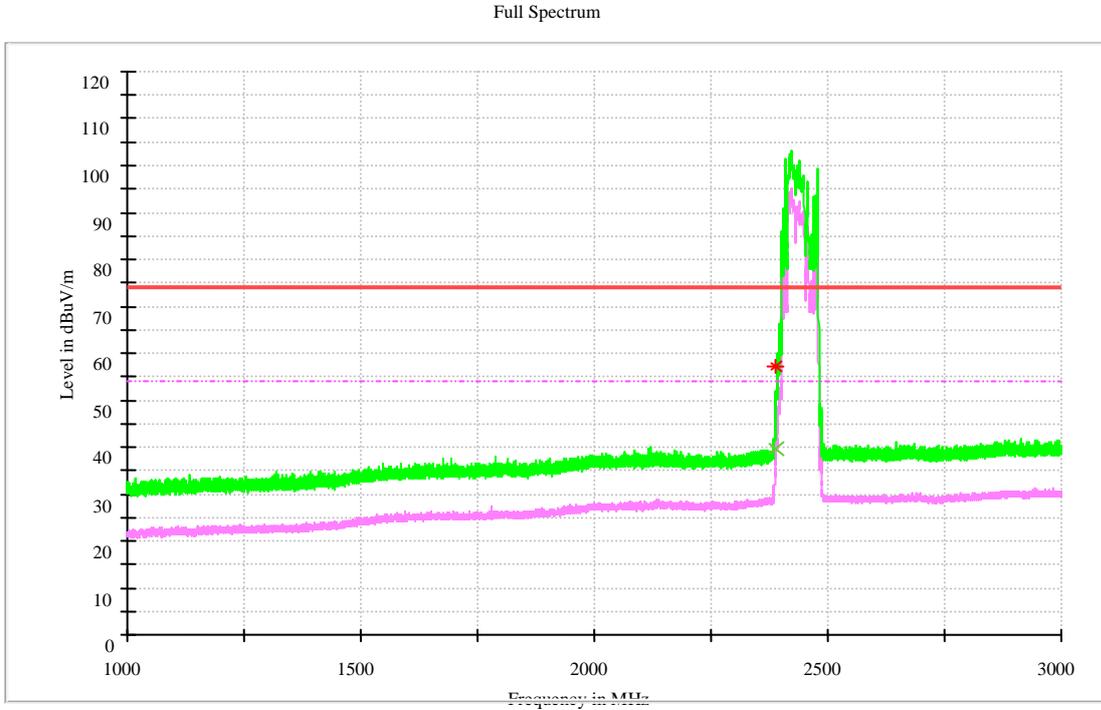

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	39.55	54.00	14.45	100.0	H	225.0	-7.6

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	57.32	74.00	16.68	100.0	H	225.0	-7.6

Note2:


1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.4.2 Channel 9@Ant 1

Full Spectrum

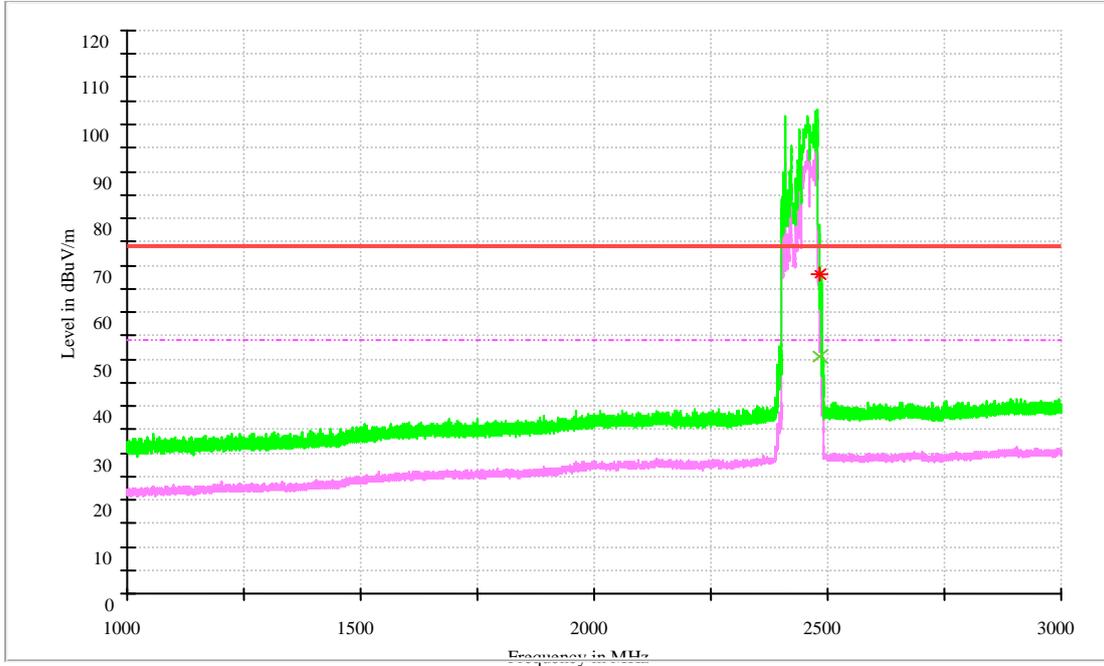

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	49.64	54.00	4.36	117.0	V	181.0	-5.4

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	68.20	74.00	5.80	116.0	V	180.0	-5.4

Note2:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

#### 1.4 Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).

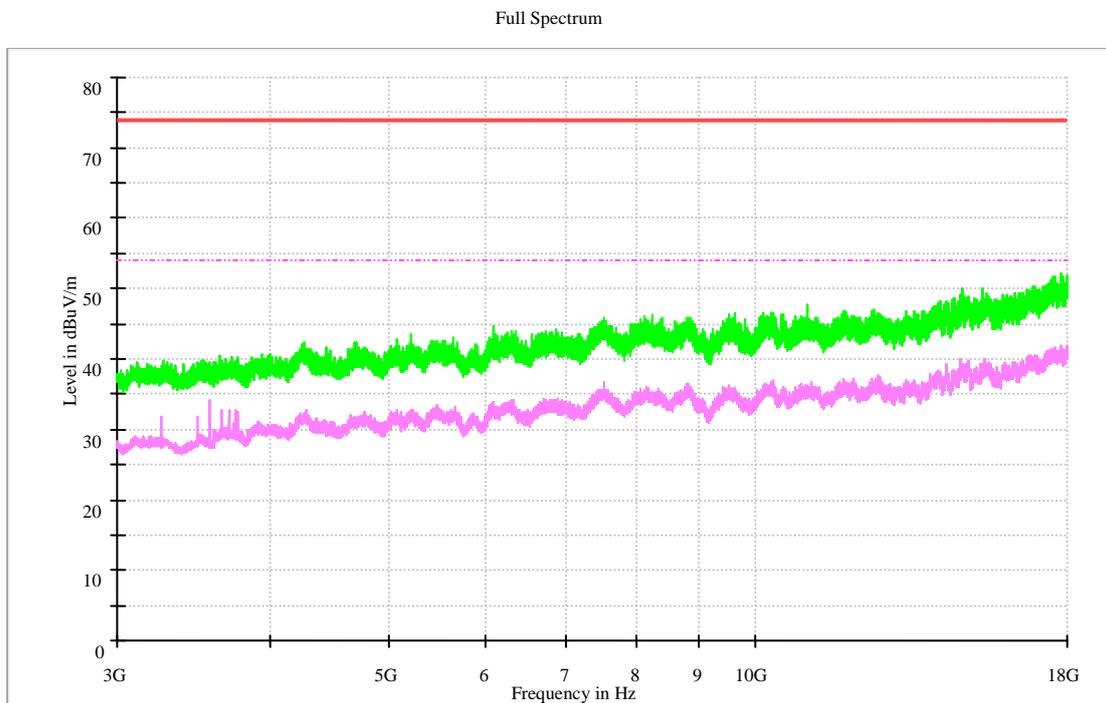


#### 1.5 Part 5: Testing Range of “18 GHz to 26.5 GHz”

NOTE: No peak found in the Test Range of “18 GHz to 26.5GHz”

## Appendix I: AC Power Line Conducted Emission

Note: RBW = 9 kHz, VBW = 30 kHz

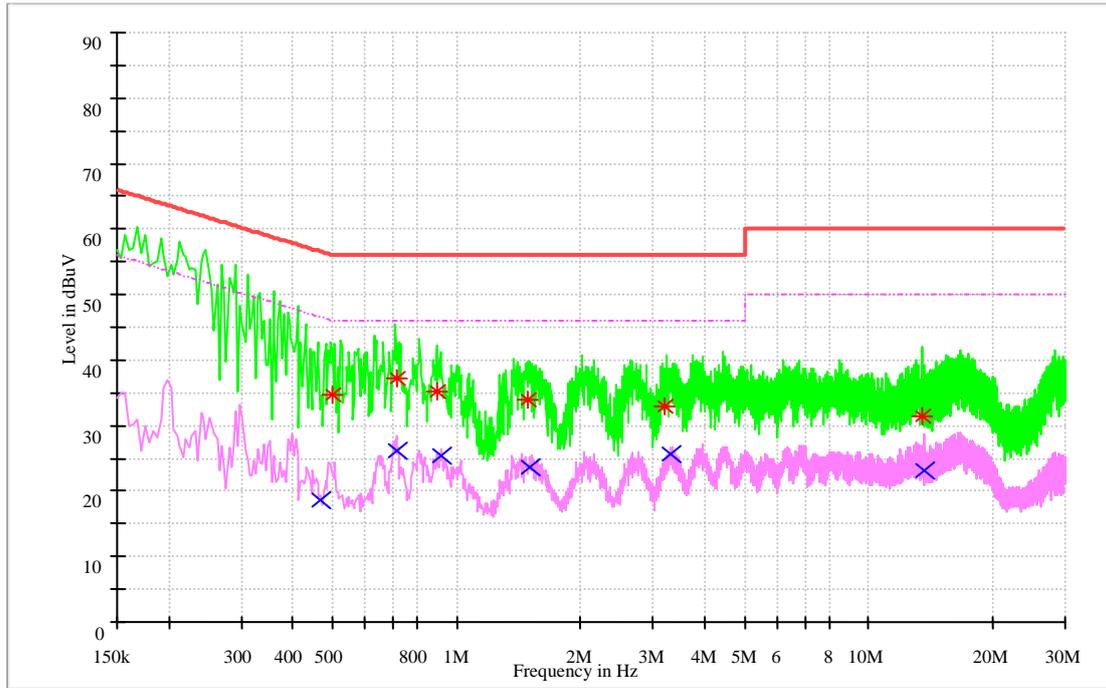

**MEASUREMENT RESULT: AV Detector**

Frequency (MHz)	Level (dBμ V)	Limit (dBμ V)	Transd. (dB)	Margin (dB)	Line	PE
0.465932	18.68	46.59	9.7	27.91	N	FLO
0.715106	26.20	46.00	9.7	19.80	L1	FLO
0.916355	25.35	46.00	9.7	20.65	L1	FLO
1.502177	23.72	46.00	9.7	22.28	L1	FLO
3.305118	25.57	46.00	9.8	20.43	L1	FLO
13.599206	23.06	50.00	10.1	26.94	N	FLO

**MEASUREMENT RESULT: PK Detector**

Frequency (MHz)	Level (dBμ V)	Limit (dBμ V)	Transd. (dB)	Margin (dB)	Line	PE
0.498032	34.74	56.03	9.7	21.29	N	FLO
0.716573	37.18	56.00	9.7	18.82	N	FLO
0.892776	35.30	56.00	9.7	20.70	N	FLO
1.482707	33.87	56.00	9.7	22.13	N	FLO
3.214428	32.92	56.00	9.8	23.08	N	FLO
13.555831	31.46	60.00	10.1	28.54	N	FLO

Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

END