



# FCC RF Test Report

**APPLICANT** : Guangdong OPPO Mobile Telecommunications Corp., Ltd.  
**EQUIPMENT** : Mobile Phone  
**BRAND NAME** : OPPO  
**MODEL NAME** : CPH2695  
**FCC ID** : R9C-OP24253  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure  
**TEST DATE(S)** : Oct. 01, 2024 ~ Oct. 21, 2024

We, Sporton International Inc.(ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 6

    1.5 Modification of EUT ..... 7

    1.6 Testing Location ..... 7

    1.7 Test Software..... 8

    1.8 Applicable Standards..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Carrier Frequency and Channel ..... 9

    2.2 Test Mode..... 10

    2.3 Connection Diagram of Test System..... 12

    2.4 Support Unit used in test configuration and system ..... 13

    2.5 EUT Operation Test Setup ..... 13

    2.6 Measurement Results Explanation Example..... 13

**3 TEST RESULT..... 14**

    3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement ..... 14

    3.2 Maximum Conducted Output Power Measurement ..... 19

    3.3 Power Spectral Density Measurement ..... 21

    3.4 Unwanted Emissions Measurement ..... 25

    3.5 AC Conducted Emission Measurement..... 30

    3.6 Antenna Requirements ..... 32

**4 LIST OF MEASURING EQUIPMENT ..... 33**

**5 MEASUREMENT UNCERTAINTY ..... 34**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 5.15 dB at 5149.91 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 15.23 dB at 0.48 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

**Conformity Assessment Condition:**

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

**Guangdong OPPO Mobile Telecommunications Corp., Ltd.**

NO.18 HaiBin Road, Wusha Village, Chang'an Town, DongGuan City, Guangdong Province, P.R. China

## 1.2 Manufacturer

**Guangdong OPPO Mobile Telecommunications Corp., Ltd.**

NO.18 HaiBin Road, Wusha Village, Chang'an Town, DongGuan City, Guangdong Province, P.R. China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	OPPO
Model Name	CPH2695
FCC ID	R9C-OP24253
IMEI Code	Conducted: 866444070022614/866444070022606 Conduction: 866444070020972/866444070020964 Radiation: 866444070020253/866444070020246
HW Version	11
SW Version	ColorOS 15.0
EUT Stage	Production Unit

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Frequency Range</b>	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz
<b>Maximum Output Power to Antenna</b>	<p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b> 802.11a : 18.36 dBm / 0.0685 W 802.11n HT20 : 18.38 dBm / 0.0689 W 802.11n HT40 : 16.65 dBm / 0.0462 W 802.11ac VHT80: 9.79 dBm / 0.0095 W</p> <p><b>&lt;5260 MHz ~ 5320 MHz&gt;</b> 802.11a : 18.39 dBm / 0.0690 W 802.11n HT20 : 18.42 dBm / 0.0695 W 802.11n HT40 : 16.67 dBm / 0.0465 W 802.11ac VHT80: 8.74 dBm / 0.0075 W</p> <p><b>&lt;5500 MHz ~ 5700 MHz &gt;</b> 802.11a : 18.62 dBm / 0.0728 W 802.11n HT20 : 18.63 dBm / 0.0729 W 802.11n HT40 : 17.58 dBm / 0.0573 W 802.11ac VHT80: 13.61 dBm / 0.0230 W</p> <p><b>&lt;5745 MHz ~ 5825 MHz&gt;</b> 802.11a : 18.77 dBm / 0.0753 W 802.11n HT20 : 18.79 dBm / 0.0757 W 802.11n HT40 : 17.70 dBm / 0.0589 W 802.11ac VHT80: 13.66 dBm / 0.0232 W</p>
<b>99% Occupied Bandwidth</b>	<p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b> 802.11a : 16.83 MHz 802.11n HT20 : 17.96 MHz 802.11n HT40 : 36.37 MHz 802.11ac VHT80 : 75.05 MHz</p> <p><b>&lt;5260 MHz ~ 5320 MHz&gt;</b> 802.11a : 16.94 MHz 802.11n HT20 : 18.01 MHz 802.11n HT40 : 36.34 MHz 802.11ac VHT80 : 75.11 MHz</p> <p><b>&lt;5500 MHz ~ 5700 MHz&gt;</b> 802.11a : 16.89 MHz 802.11n HT20 : 17.99 MHz 802.11n HT40 : 36.42 MHz 802.11ac VHT80 : 75.11 MHz</p> <p><b>&lt;5745 MHz ~ 5825 MHz&gt;</b> 802.11a : 16.84 MHz 802.11n HT20 : 17.89 MHz 802.11n HT40 : 36.31 MHz 802.11ac VHT80 : 75.09 MHz</p>



<b>Antenna Type / Gain</b>	<p>&lt;5180 MHz ~ 5240 MHz&gt; IFA Antenna with gain 1 dBi</p> <p>&lt;5260 MHz ~ 5320 MHz&gt; IFA Antenna with gain 1.5 dBi</p> <p>&lt;5500 MHz ~ 5700 MHz&gt; IFA Antenna with gain 1.5 dBi</p> <p>&lt;5745 MHz ~ 5825 MHz&gt; IFA Antenna with gain 1.5 dBi</p>
<b>Type of Modulation</b>	<p>802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)</p> <p>802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)</p>

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing has assessed only 802.11n HT20/ HT40 by referring to their higher power setting.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO02-SZ ; 03CH04-SZ	CN1256	421272



### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.





## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42#	5210	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58#	5290	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5700MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106#	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825



Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122#	5610	128	5640

Note:

1. The above Frequency and Channel in "\*" are 40MHz bandwidth.
2. The above Frequency and Channel in "#" are 80MHz bandwidth.

## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Cover VHT20)	MCS0
802.11n HT40 (Cover VHT40)	MCS0
802.11ac VHT80	MCS0

<b>AC Conducted Emission</b>	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link(5G) + Adapter 1 + USB Cable + Battery 1
<b>Remark:</b> For Radiated Test Cases, The tests were performance with Adapter 1 and USB Cable 1	

RSE Co-location
802.11n HT40 CH38 5190MHz + LTE Band13 Link Bluetooth LE(2 Mbps) CH01 2404MHz TX + 802.11n HT40 CH38 5190MHz + LTE Band13 Link




Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	-	-

## 2.3 Connection Diagram of Test System

AC Conducted Emission:

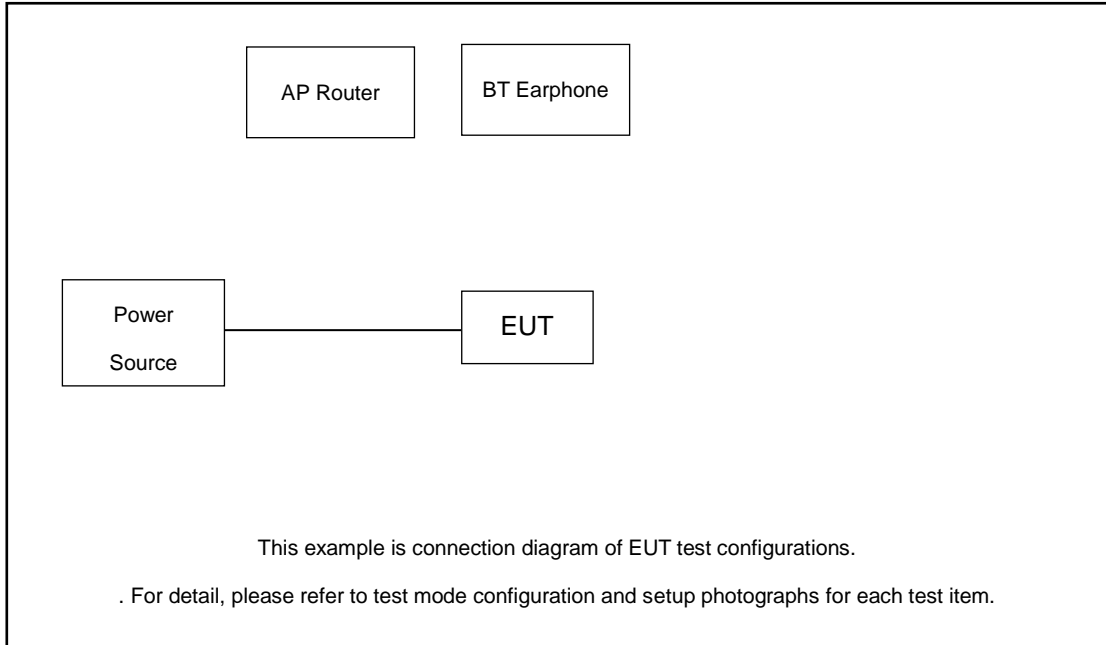

Radiated Emission:

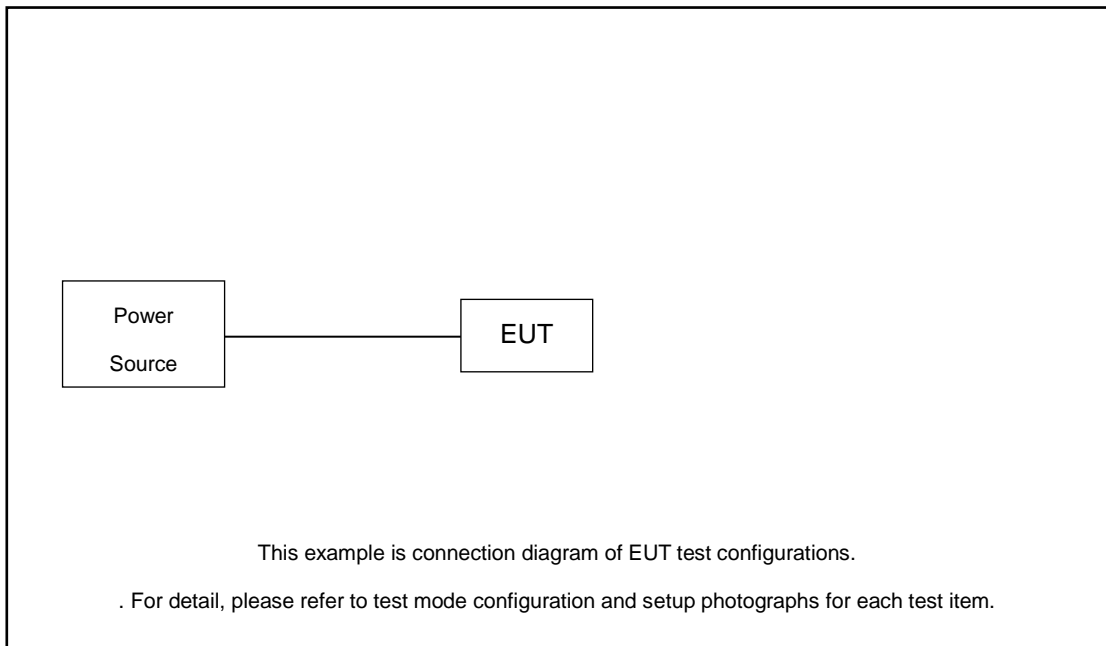

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	NOTE BOOK	Lenovo	E540	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
3.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
4.	WLAN AP	Dlink	DIR-820L	KA21R820LA1	N/A	Unshielded,1.8m

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 2.80 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 2.80 + 10 = 12.80 \text{ (dB)}
 \end{aligned}$$



### 3 Test Result

#### 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

##### 3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	<ol style="list-style-type: none"> <li>Set RBW = approximately 1% of the emission bandwidth.</li> <li>Set the VBW &gt; RBW.</li> <li>Detector = Peak.</li> <li>Trace mode = max hold</li> <li>Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.</li> <li>For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.</li> <li>Measure and record the results in the test report.</li> </ol>
<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	<ol style="list-style-type: none"> <li>Set RBW = 100kHz.</li> <li>Set the VBW ≥ 3 x RBW.</li> <li>Detector = Peak.</li> <li>Trace mode = max hold</li> <li>Measure the maximum width of the emission that is 6 dB down from the peak of the emission.</li> <li>Measure and record the results in the test report.</li> </ol>



### 3.1.4 Test Setup

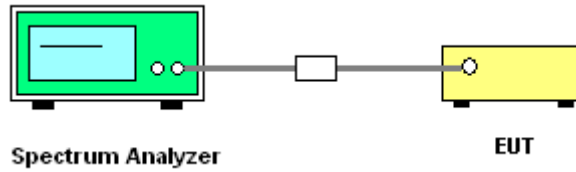



### 3.1.5 Test Result of 6dB Bandwidth



Please refer to Appendix A.

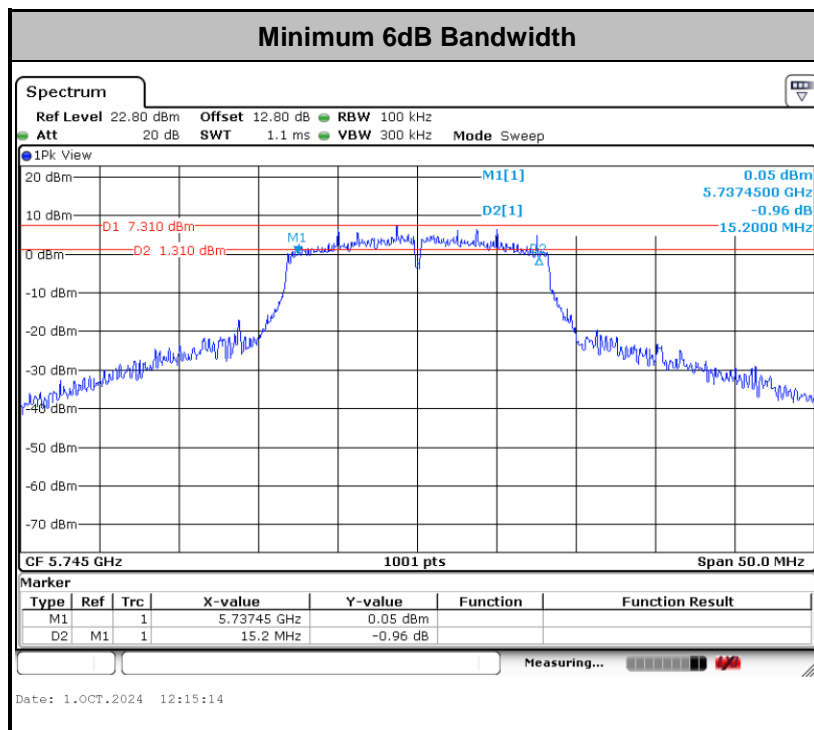

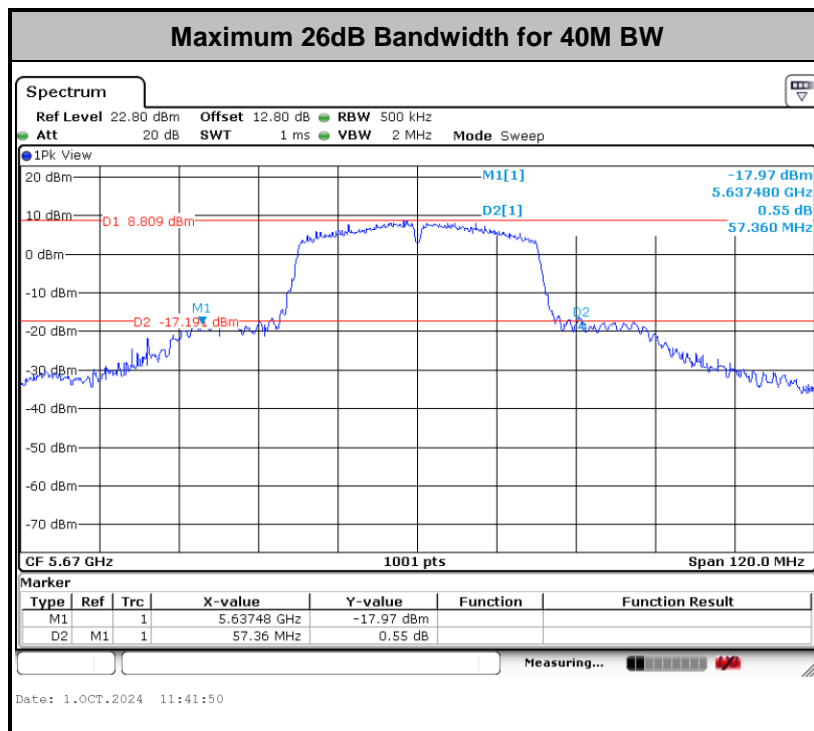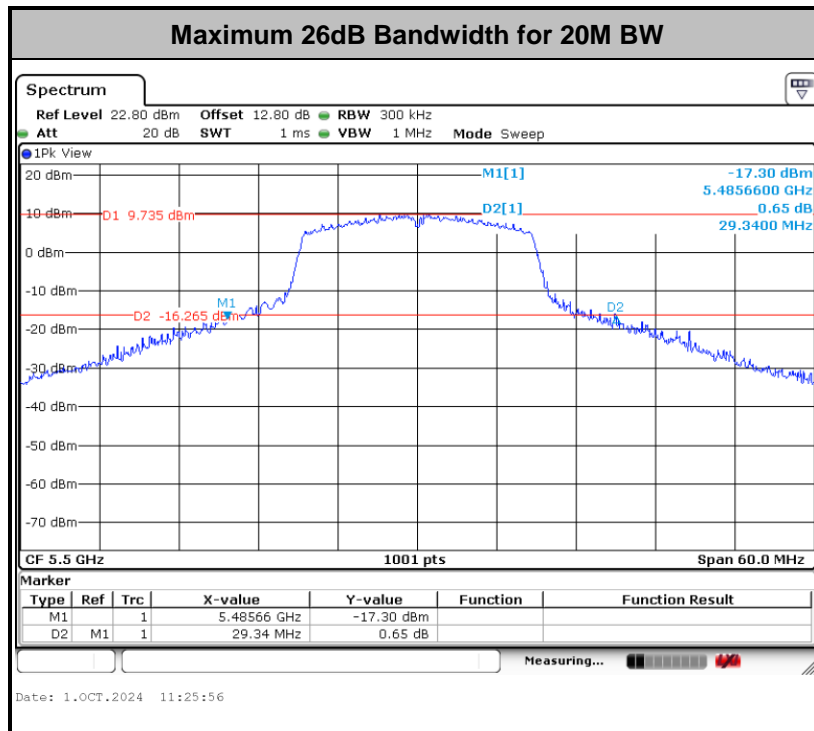



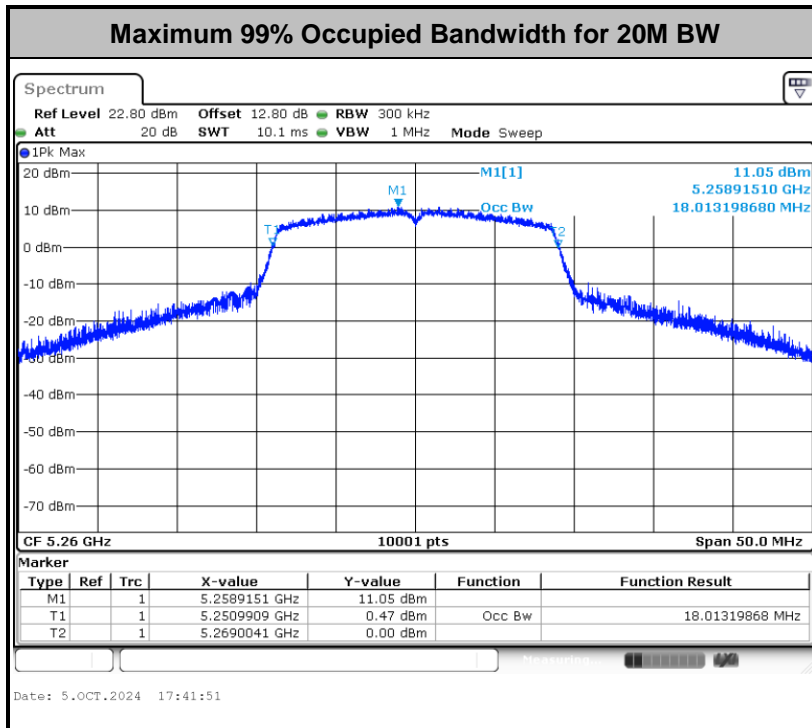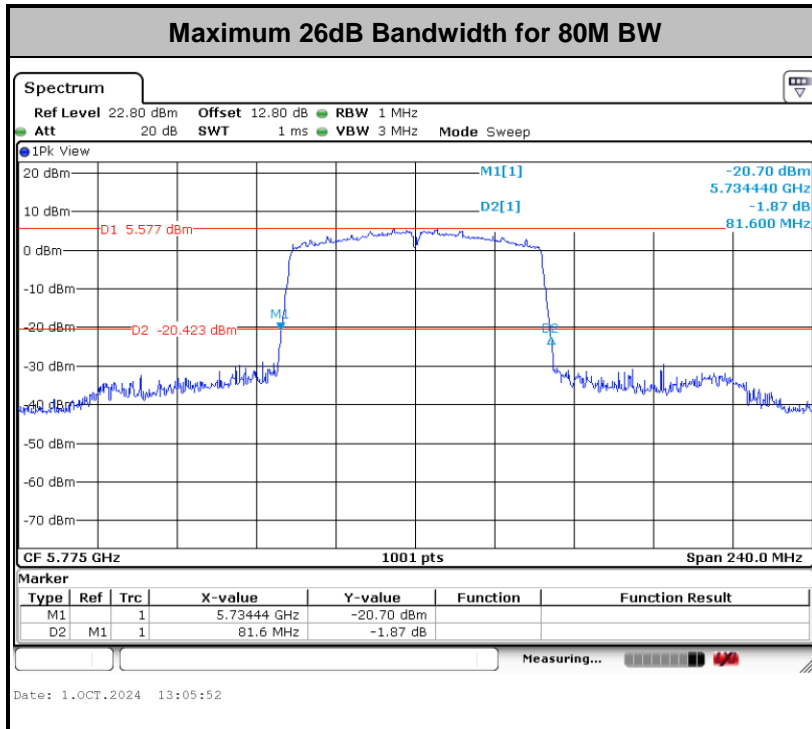

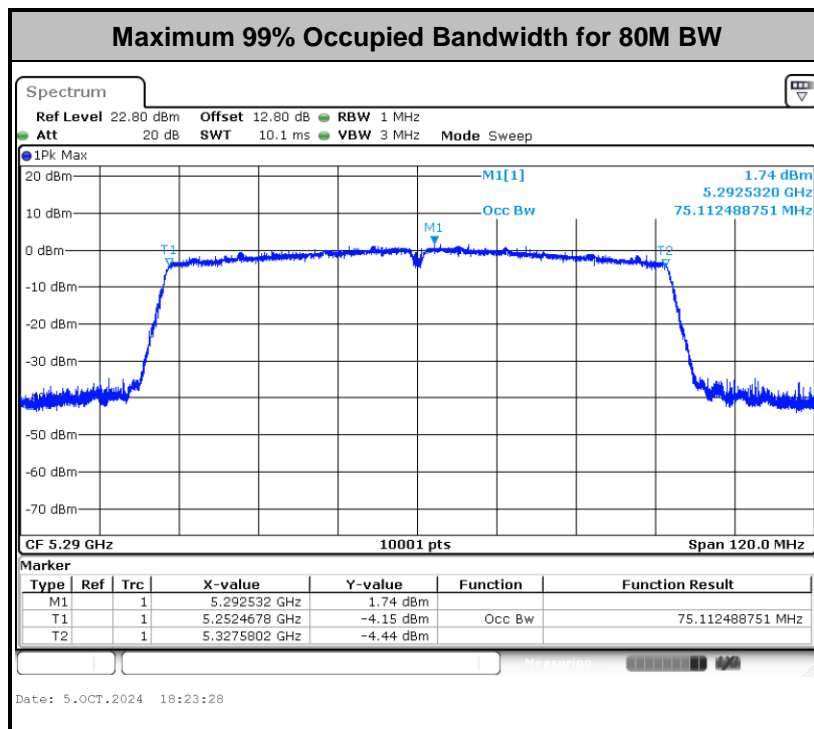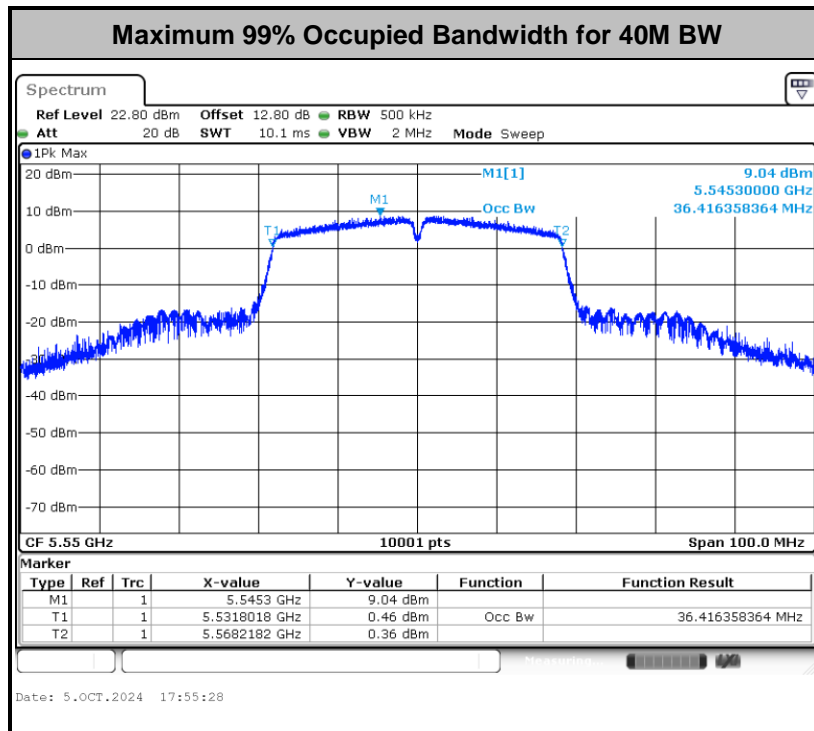

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log_{10} B$ , where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

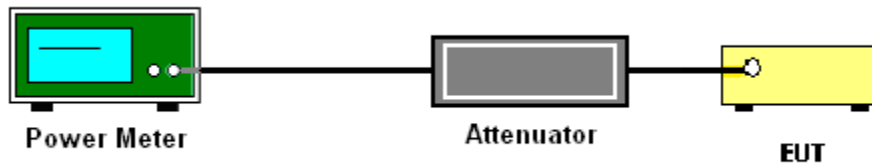

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.  
Section F) Maximum power spectral density.

#### **For devices operating in the bands UNII-1/2A/2C**

##### **# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW  $\geq$  3 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

#### **For devices operating in the band UNII-3**


##### **# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW  $\geq$  1 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

### 3.3.4 Test Setup

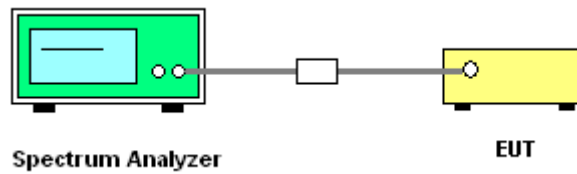




### 3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.

**For devices operating in the bands UNII-1/2A/2C**

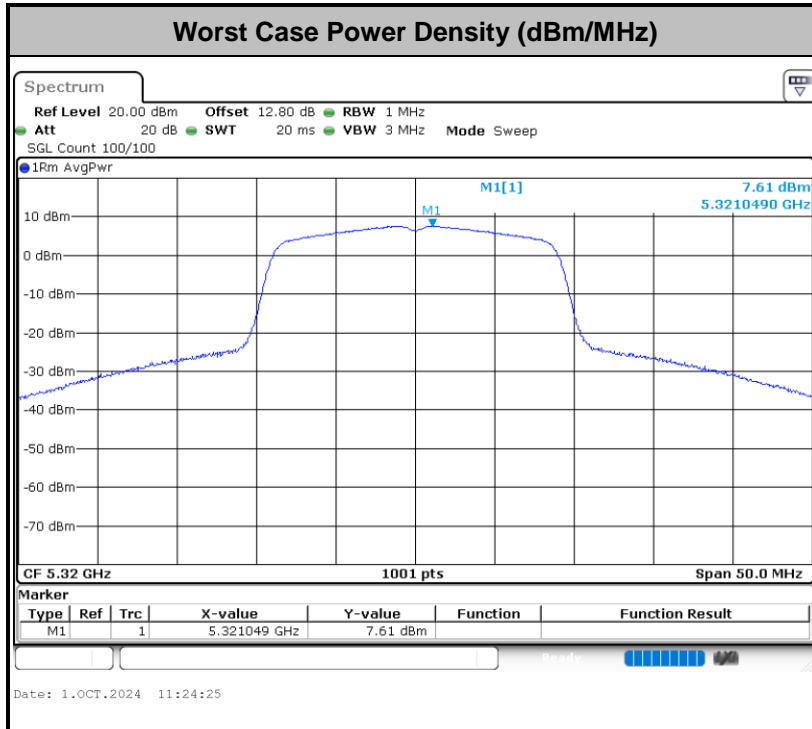

**Note:** Average Power Density (dB) = Measured value+ Duty Factor

**For devices operating in the band UNII-3**

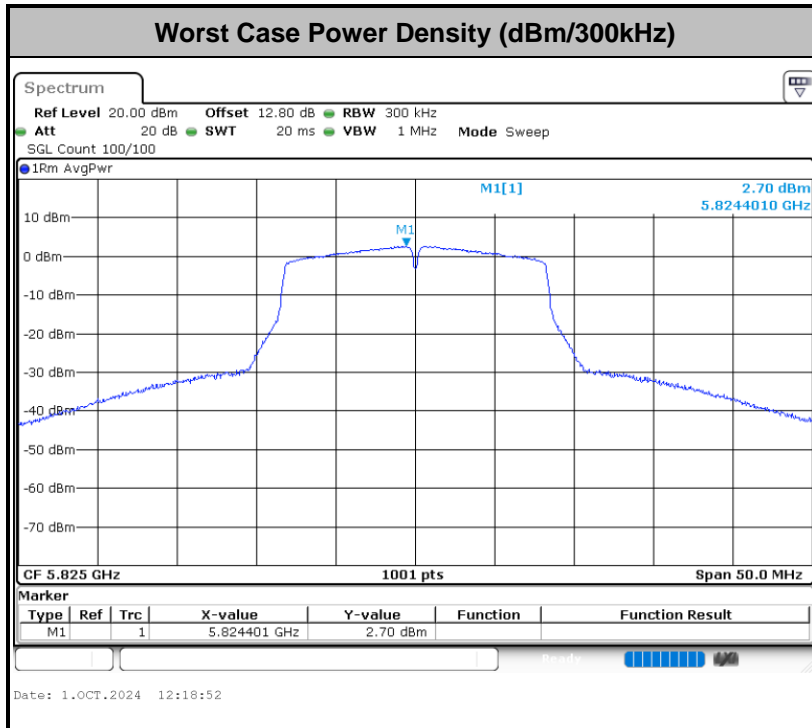





### 3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of  $-27\text{dBm/MHz}$ .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of  $-27\text{ dBm/MHz}$ . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of  $-27\text{ dBm/MHz}$  in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of  $-27\text{ dBm/MHz}$ .

- (2) For transmitters operating in the 5.725-5.85 GHz band:  
15.407(b)(4)(i) All emissions shall be limited to a level of  $-27\text{ dBm/MHz}$  at 75 MHz or more above or below the band edge increasing linearly to  $10\text{ dBm/MHz}$  at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of  $15.6\text{ dBm/MHz}$  at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of  $27\text{ dBm/MHz}$  at the band edge.



(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E<sub>Meas</sub> is the field strength of the emission at the measurement distance, in dBµV/m

d<sub>Meas</sub> is the measurement distance, in m

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

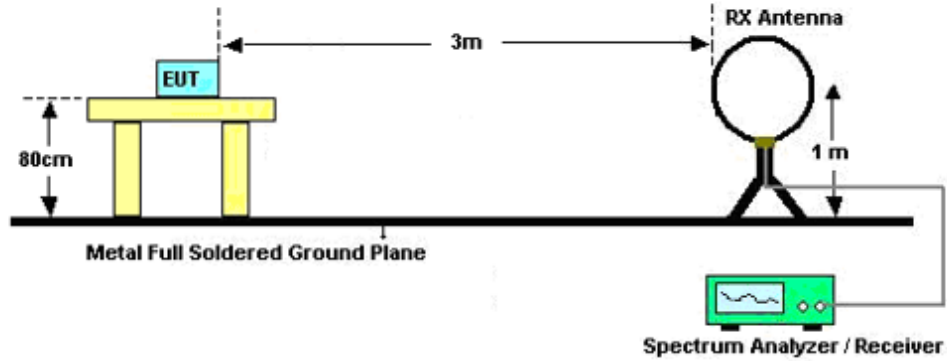

For radiated emissions from 30MHz to 1GHz

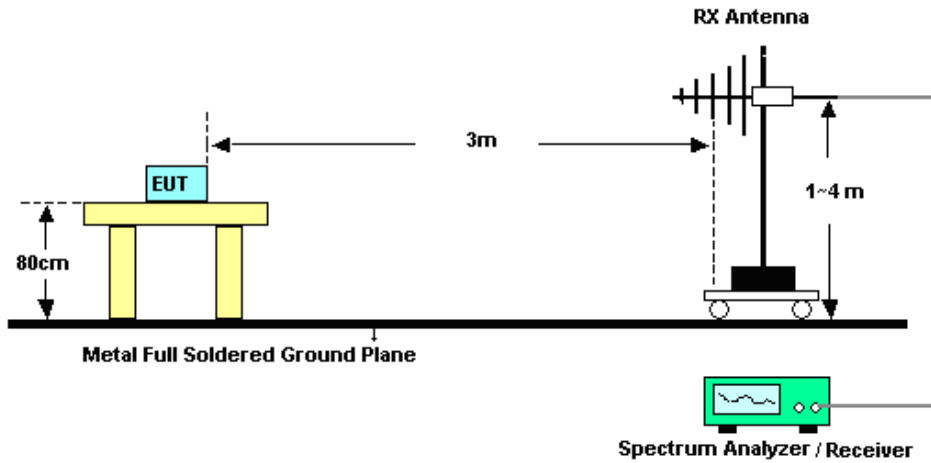

For radiated emissions above 1GHz

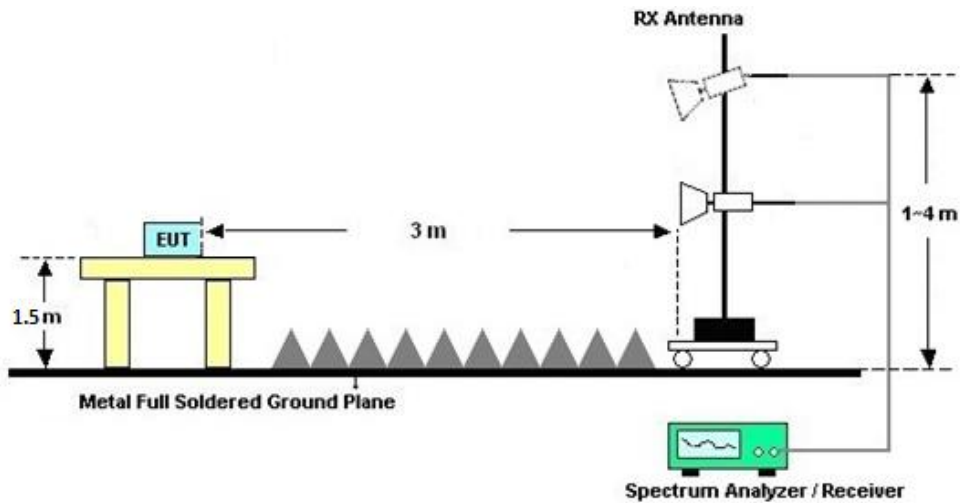



### **3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.4.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.4.7 Duty Cycle**

Please refer to Appendix D.

### **3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)**

Please refer to Appendix C.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

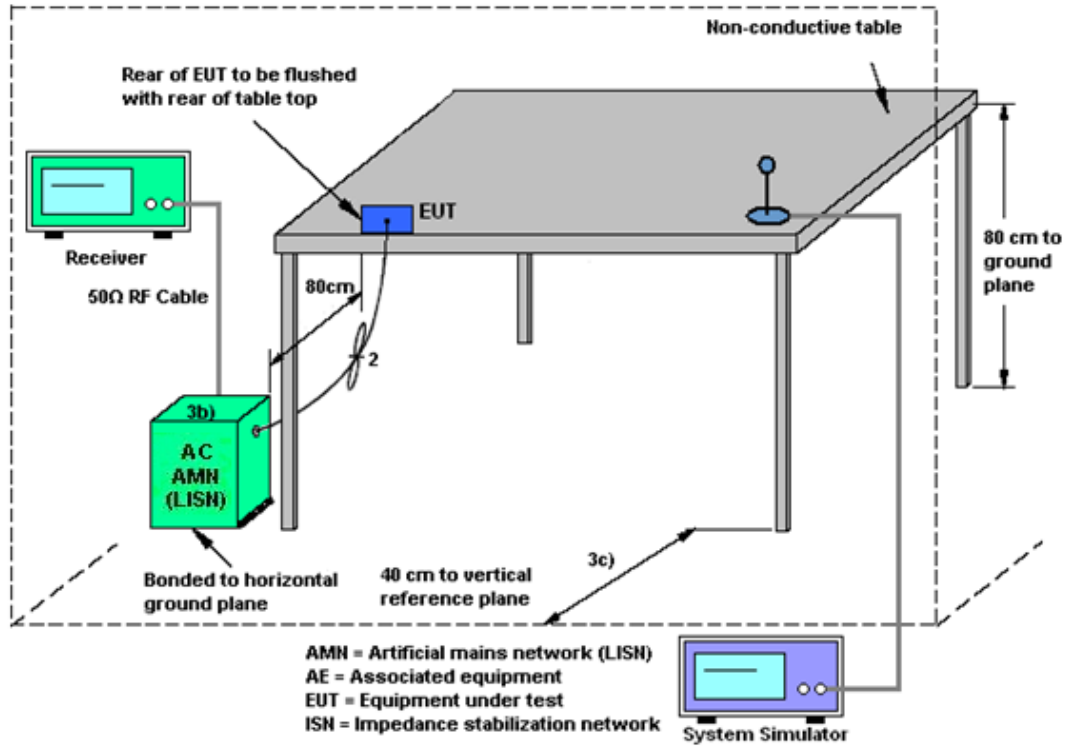

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Antenna Requirements**

### **3.6.1 Standard Applicable**

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.6.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.6.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.





## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 18, 2023	Oct. 01, 2024~ Oct. 06, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Oct. 01, 2024~ Oct. 06, 2024	Jul. 02, 2025	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2023	Oct. 01, 2024~ Oct. 06, 2024	Dec. 28, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May. 09, 2024	Oct. 01, 2024~ Oct. 06, 2024	May. 08, 2025	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2023	Oct. 01, 2024~ Oct. 06, 2024	Jul. 06, 2025	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 04, 2024	Oct. 01, 2024~ Oct. 06, 2024	Jul. 03, 2025	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 18, 2023	Oct. 01, 2024~ Oct. 06, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Oct. 01, 2024~ Oct. 06, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz	Jul. 03, 2024	Oct. 01, 2024~ Oct. 06, 2024	Jul. 02, 2025	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5G Hz	Jul. 03, 2024	Oct. 01, 2024~ Oct. 06, 2024	Jul. 02, 2025	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 18, 2023	Oct. 01, 2024~ Oct. 06, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Oct. 01, 2024~ Oct. 06, 2024	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Oct. 01, 2024~ Oct. 06, 2024	NCR	Radiation (03CH04-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Oct. 21, 2024	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Oct. 21, 2024	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	6160100024 70	100Vac~250Vac	Dec.25, 2022	Oct. 21, 2024	Dec. 24, 2024	Conduction (CO02-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Oct. 01, 2024~ Oct. 05, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2023	Oct. 01, 2024~ Oct. 05, 2024	Dec. 28, 2024	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 16, 2023	Oct. 01, 2024~ Oct. 05, 2024	Oct. 15, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H201408180 3	-40~+150°C	Jul. 03, 2024	Oct. 01, 2024~ Oct. 05, 2024	Jul. 02, 2025	Conducted (TH01-SZ)

NCR: No Calibration Required



## 5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

### Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

----- THE END -----



## Appendix A. Conducted Test Results

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Xiaobin Han	Temperature:	21~25	°C
Test Date:	2024/10/1~2024/10/5	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**26dB and 99% OBW**

<5180 MHz ~ 5240 MHz>								
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)		Note
					Ant 8	Ant 8		
11a	6Mbps	1	36	5180	16.82	23.52		
11a	6Mbps	1	44	5220	16.82	27.60		
11a	6Mbps	1	48	5240	16.83	24.72		
HT20	MCS0	1	36	5180	17.87	27.60		
HT20	MCS0	1	44	5220	17.89	28.80		
HT20	MCS0	1	48	5240	17.96	28.14		
HT40	MCS0	1	38	5190	36.37	41.28		
HT40	MCS0	1	46	5230	36.35	49.92		
VHT80	MCS0	1	42	5210	75.05	81.36		

**TEST RESULTS DATA**  
**26dB and 99% OBW**

<5260 MHz ~ 5320 MHz>								
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	FCC 26dB Bandwidth Power Limit (dBm)	Note
					Ant 8	Ant 8	Ant 8	
11a	6Mbps	1	52	5260	16.77	25.32	23.98	
11a	6Mbps	1	60	5300	16.90	25.32	23.98	
11a	6Mbps	1	64	5320	16.94	26.28	23.98	
HT20	MCS0	1	52	5260	18.01	27.42	23.98	
HT20	MCS0	1	60	5300	17.97	27.84	23.98	
HT20	MCS0	1	64	5320	17.91	27.48	23.98	
HT40	MCS0	1	54	5270	36.34	42.12	23.98	
HT40	MCS0	1	62	5310	36.29	42.24	23.98	
VHT80	MCS0	1	58	5290	75.11	81.36	23.98	

**TEST RESULTS DATA**  
**26dB and 99% OBW**

<5500 MHz ~ 5700 MHz >								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	FCC 26dB Bandwidth Power Limit (dBm)	Note
					Ant 8	Ant 8	Ant 8	
11a	6Mbps	1	100	5500	16.86	29.22	23.98	
11a	6Mbps	1	116	5580	16.89	27.66	23.98	
11a	6Mbps	1	140	5700	16.87	27.06	23.98	
HT20	MCS0	1	100	5500	17.99	29.34	23.98	
HT20	MCS0	1	116	5580	17.87	26.40	23.98	
HT20	MCS0	1	140	5700	17.93	26.76	23.98	
HT40	MCS0	1	102	5510	36.40	53.88	23.98	
HT40	MCS0	1	110	5550	36.42	57.36	23.98	
HT40	MCS0	1	134	5670	36.36	57.36	23.98	
VHT80	MCS0	1	106	5530	75.11	81.36	23.98	
VHT80	MCS0	1	122	5610	75.09	81.36	23.98	

**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

<5745 MHz ~ 5825 MHz>									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	16.81	27.48	15.20	0.5	Pass
11a	6Mbps	1	157	5785	16.83	27.24	15.25	0.5	Pass
11a	6Mbps	1	165	5825	16.84	27.66	15.20	0.5	Pass
HT20	MCS 0	1	149	5745	17.89	28.62	15.35	0.5	Pass
HT20	MCS 0	1	157	5785	17.85	27.54	15.20	0.5	Pass
HT20	MCS 0	1	165	5825	17.85	26.82	15.20	0.5	Pass
HT40	MCS 0	1	151	5755	36.27	57.36	35.28	0.5	Pass
HT40	MCS 0	1	159	5795	36.31	57.36	35.28	0.5	Pass
VHT80	MCS 0	1	155	5775	75.09	81.60	75.52	0.5	Pass



**TEST RESULTS DATA**  
**Average Power Table**

<5180 MHz ~ 5240 MHz>										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	Power Setting
					Ant 8	Ant 8	Ant 8	Ant 8		
11a	6Mbps	1	36	5180	0.11	16.87	24.00	1.00	Pass	17
11a	6Mbps	1	44	5220	0.11	18.34	24.00	1.00	Pass	18.5
11a	6Mbps	1	48	5240	0.11	18.36	24.00	1.00	Pass	18.5
HT20	MCS0	1	36	5180	0.11	16.89	24.00	1.00	Pass	17
HT20	MCS0	1	44	5220	0.11	18.35	24.00	1.00	Pass	18.5
HT20	MCS0	1	48	5240	0.11	18.38	24.00	1.00	Pass	18.5
HT40	MCS0	1	38	5190	0.23	13.25	24.00	1.00	Pass	13.5
HT40	MCS0	1	46	5230	0.23	16.65	24.00	1.00	Pass	17
VHT80	MCS0	1	42	5210	0.00	9.79	24.00	1.00	Pass	10.5

**TEST RESULTS DATA**  
**Average Power Table**

<5260 MHz ~ 5320 MHz>											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
					Ant 8	Ant 8	Ant 8	Ant 8			
11a	6Mbps	1	52	5260	0.11	18.31	24.00	1.50	26.99	Pass	18.5
11a	6Mbps	1	60	5300	0.11	18.39	24.00	1.50	26.99	Pass	18.5
11a	6Mbps	1	64	5320	0.11	15.86	24.00	1.50	26.99	Pass	16
HT20	MCS0	1	52	5260	0.11	18.33	24.00	1.50	26.99	Pass	18.5
HT20	MCS0	1	60	5300	0.11	18.42	24.00	1.50	26.99	Pass	18.5
HT20	MCS0	1	64	5320	0.11	15.91	24.00	1.50	26.99	Pass	16
HT40	MCS0	1	54	5270	0.23	16.67	24.00	1.50	26.99	Pass	17
HT40	MCS0	1	62	5310	0.23	13.22	24.00	1.50	26.99	Pass	13.5
VHT80	MCS0	1	58	5290	0.00	8.74	24.00	1.50	26.99	Pass	9.5

**TEST RESULTS DATA**  
**Average Power Table**

<5500 MHz ~ 5700 MHz >											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
					Ant 8	Ant 8	Ant 8	Ant 8			
11a	6Mbps	1	100	5500	0.11	15.55	24.00	1.50	26.99	Pass	16
11a	6Mbps	1	116	5580	0.11	18.62	24.00	1.50	26.99	Pass	19
11a	6Mbps	1	140	5700	0.11	14.59	24.00	1.50	26.99	Pass	15
HT20	MCS0	1	100	5500	0.11	15.53	24.00	1.50	26.99	Pass	16
HT20	MCS0	1	116	5580	0.11	18.63	24.00	1.50	26.99	Pass	19
HT20	MCS0	1	140	5700	0.11	14.64	24.00	1.50	26.99	Pass	15
HT40	MCS0	1	102	5510	0.23	14.08	24.00	1.50	26.99	Pass	14.5
HT40	MCS0	1	110	5550	0.23	17.58	24.00	1.50	26.99	Pass	18
HT40	MCS0	1	134	5670	0.23	17.01	24.00	1.50	26.99	Pass	17.5
VHT80	MCS0	1	106	5530	0.00	10.92	24.00	1.50	26.99	Pass	12
VHT80	MCS0	1	122	5610	0.00	13.61	24.00	1.50	26.99	Pass	14.5

**TEST RESULTS DATA**  
**Average Power Table**

<5745 MHz ~ 5825 MHz>											
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail	Setting
11a	6M bps	1	149	5745	0.11	18.74	30.00	1.50		Pass	19
11a	6Mbps	1	157	5785	0.11	18.77	30.00	1.50		Pass	19
11a	6Mbps	1	165	5825	0.11	18.76	30.00	1.50		Pass	19
HT20	MCS 0	1	149	5745	0.11	18.76	30.00	1.50		Pass	19
HT20	MCS 0	1	157	5785	0.11	18.79	30.00	1.50		Pass	19
HT20	MCS 0	1	165	5825	0.11	18.78	30.00	1.50		Pass	19
HT40	MCS 0	1	151	5755	0.23	17.70	30.00	1.50		Pass	18
HT40	MCS 0	1	159	5795	0.23	17.66	30.00	1.50		Pass	18
VHT80	MCS 0	1	155	5775	0.00	13.66	30.00	1.50		Pass	14.5

**TEST RESULTS DATA**  
**Power Spectral Density**

<5180 MHz ~ 5240 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass /Fail
					Ant 8	Ant 8	Ant 8	Ant 8		
11a	6Mbps	1	36	5180	0.11	7.39	11.00	1.00		Pass
11a	6Mbps	1	44	5220	0.11	7.32	11.00	1.00		Pass
11a	6Mbps	1	48	5240	0.11	7.38	11.00	1.00		Pass
HT20	MCS0	1	36	5180	0.11	7.16	11.00	1.00		Pass
HT20	MCS0	1	44	5220	0.11	7.03	11.00	1.00		Pass
HT20	MCS0	1	48	5240	0.11	7.49	11.00	1.00		Pass
HT40	MCS0	1	38	5190	0.23	2.69	11.00	1.00		Pass
HT40	MCS0	1	46	5230	0.23	2.60	11.00	1.00		Pass
VHT80	MCS0	1	42	5210	0.00	-7.99	11.00	1.00		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

<5260 MHz ~ 5320 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass /Fail
					Ant 8	Ant 8	Ant 8	Ant 8		
11a	6Mbps	1	52	5260	0.11	7.39	11.00	1.50		Pass
11a	6Mbps	1	60	5300	0.11	7.44	11.00	1.50		Pass
11a	6Mbps	1	64	5320	0.11	7.44	11.00	1.50		Pass
HT20	MCS0	1	52	5260	0.11	7.55	11.00	1.50		Pass
HT20	MCS0	1	60	5300	0.11	7.68	11.00	1.50		Pass
HT20	MCS0	1	64	5320	0.11	7.72	11.00	1.50		Pass
HT40	MCS0	1	54	5270	0.23	2.74	11.00	1.50		Pass
HT40	MCS0	1	62	5310	0.23	2.89	11.00	1.50		Pass
VHT80	MCS0	1	58	5290	0.00	-9.12	11.00	1.50		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

<5500 MHz ~ 5700 MHz >										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/)	Average PSD Limit (dBm/)	DG (dBi)		Pass /Fail
					Ant 8	Ant 8	Ant 8	Ant 8		
11a	6Mbps	1	100	5500	0.11	7.43	11.00	1.50		Pass
11a	6Mbps	1	116	5580	0.11	7.52	11.00	1.50		Pass
11a	6Mbps	1	140	5700	0.11	7.64	11.00	1.50		Pass
HT20	MCS0	1	100	5500	0.11	7.18	11.00	1.50		Pass
HT20	MCS0	1	116	5580	0.11	7.31	11.00	1.50		Pass
HT20	MCS0	1	140	5700	0.11	7.34	11.00	1.50		Pass
HT40	MCS0	1	102	5510	0.23	3.36	11.00	1.50		Pass
HT40	MCS0	1	110	5550	0.23	3.50	11.00	1.50		Pass
HT40	MCS0	1	134	5670	0.23	3.33	11.00	1.50		Pass
VHT80	MCS0	1	106	5530	0.00	-4.24	11.00	1.50		Pass
VHT80	MCS0	1	122	5610	0.00	-4.26	11.00	1.50		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**


<5745 MHz ~ 5825 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.11	2.22	5.02	30.00	1.50	Pass
11a	6Mbps	1	157	5785	0.11	2.22	5.01	30.00	1.50	Pass
11a	6Mbps	1	165	5825	0.11	2.22	5.03	30.00	1.50	Pass
HT20	MCS 0	1	149	5745	0.11	2.22	4.71	30.00	1.50	Pass
HT20	MCS 0	1	157	5785	0.11	2.22	4.76	30.00	1.50	Pass
HT20	MCS 0	1	165	5825	0.11	2.22	4.77	30.00	1.50	Pass
HT40	MCS 0	1	151	5755	0.23	2.22	0.91	30.00	1.50	Pass
HT40	MCS 0	1	159	5795	0.23	2.22	0.72	30.00	1.50	Pass
VHT80	MCS 0	1	155	5775	0.00	2.22	-6.54	30.00	1.50	Pass





## Appendix B. AC Conducted Emission Test Results

Test Engineer :	ZhangXu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

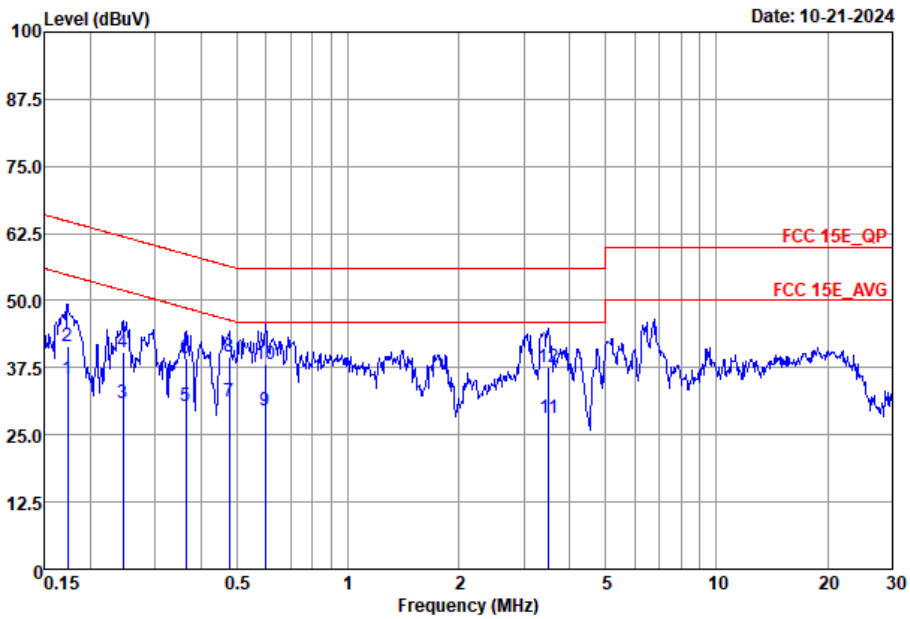


Site : CO02-SZ  
 Condition : FCC 15E\_QP LISN\_2024-L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17	35.46	-19.31	54.77	15.20	10.10	10.16	Average
2	0.17	41.56	-23.21	64.77	21.30	10.10	10.16	QP
3	0.25	30.89	-21.02	51.91	10.70	10.04	10.15	Average
4	0.25	40.39	-21.52	61.91	20.20	10.04	10.15	QP
5	0.36	30.37	-18.28	48.65	10.20	10.00	10.17	Average
6	0.36	39.17	-19.48	58.65	19.00	10.00	10.17	QP
7	0.48	31.18	-15.23	46.41	11.00	9.98	10.20	Average
8 *	0.48	39.58	-16.83	56.41	19.40	9.98	10.20	QP
9	0.60	29.40	-16.60	46.00	9.20	9.98	10.22	Average
10	0.60	38.10	-17.90	56.00	17.90	9.98	10.22	QP
11	3.51	28.04	-17.96	46.00	7.90	9.90	10.24	Average
12	3.51	37.74	-18.26	56.00	17.60	9.90	10.24	QP



Test Engineer :	ZhangXu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

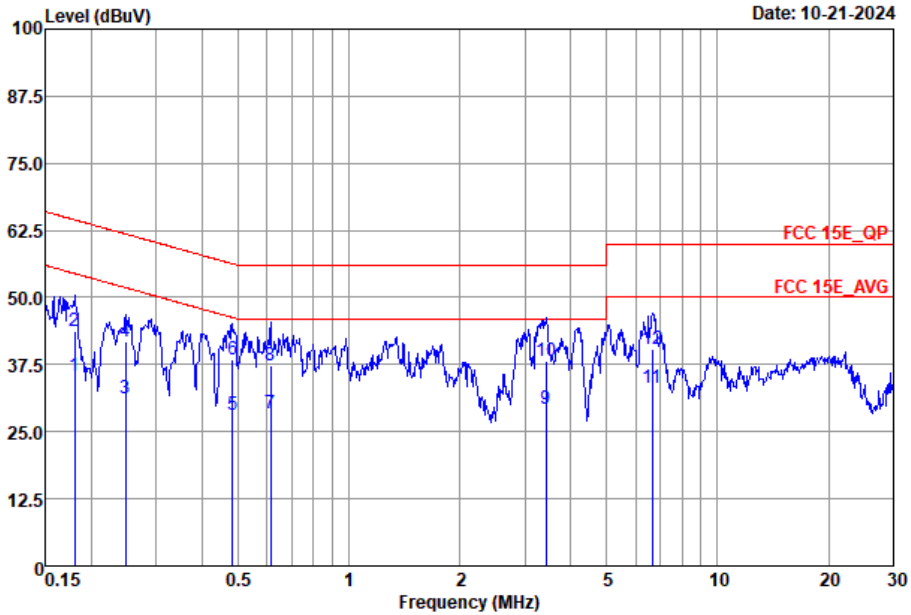

Site : CO02-SZ  
 Condition : FCC 15E\_QP LISN\_2024-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.18	35.43	-19.03	54.46	15.20	10.07	10.16	Average
2	0.18	43.73	-20.73	64.46	23.50	10.07	10.16	QP
3	0.25	31.06	-20.76	51.82	10.90	10.01	10.15	Average
4	0.25	41.66	-20.16	61.82	21.50	10.01	10.15	QP
5	0.48	28.06	-18.21	46.27	7.90	9.96	10.20	Average
6 *	0.48	38.56	-17.71	56.27	18.40	9.96	10.20	QP
7	0.61	28.48	-17.52	46.00	8.29	9.97	10.22	Average
8	0.61	37.28	-18.72	56.00	17.09	9.97	10.22	QP
9	3.42	29.14	-16.86	46.00	9.01	9.89	10.24	Average
10	3.42	38.24	-17.76	56.00	18.11	9.89	10.24	QP
11	6.66	33.22	-16.78	50.00	13.20	9.79	10.23	Average
12	6.66	40.32	-19.68	60.00	20.30	9.79	10.23	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Wenbo Xiao	Relative Humidity :	48~49%
		Temperature :	24°C~25°C

### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	8	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	8	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	8	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	8	802.11a	52	5280	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	8	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	8	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	8	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	8	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	8	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	8	802.11n HT20	36	5180	MCS0	-	-
Mode 11	U-NII-1	5.15-5.25	8	802.11n HT20	44	5220	MCS0	-	-
Mode 12	U-NII-1	5.15-5.25	8	802.11n HT20	48	5240	MCS0	-	-
Mode 13	U-NII-2A	5.25-5.35	8	802.11n HT20	52	5280	MCS0	-	-
Mode 14	U-NII-2A	5.25-5.35	8	802.11n HT20	60	5300	MCS0	-	-
Mode 15	U-NII-2A	5.25-5.35	8	802.11n HT20	64	5320	MCS0	-	-
Mode 16	U-NII-2C	5.47-5.725	8	802.11n HT20	100	5500	MCS0	-	-
Mode 17	U-NII-2C	5.47-5.725	8	802.11n HT20	116	5580	MCS0	-	-
Mode 18	U-NII-2C	5.47-5.725	8	802.11n HT20	140	5700	MCS0	-	-
Mode 19	U-NII-1	5.15-5.25	8	802.11n HT40	38	5190	MCS0	-	-
Mode 20	U-NII-1	5.15-5.25	8	802.11n HT40	46	5230	MCS0	-	-
Mode 21	U-NII-2A	5.25-5.35	8	802.11n HT40	54	5270	MCS0	-	-
Mode 22	U-NII-2A	5.25-5.35	8	802.11n HT40	62	5310	MCS0	-	-
Mode 23	U-NII-2C	5.47-5.725	8	802.11n HT40	102	5510	MCS0	-	-
Mode 24	U-NII-2C	5.47-5.725	8	802.11n HT40	134	5670	MCS0	-	-
Mode 25	U-NII-1	5.15-5.25	8	802.11ac VHT80	42	5210	MCS0	-	-
Mode 26	U-NII-2A	5.25-5.35	8	802.11ac VHT80	58	5290	MCS0	-	-
Mode 27	U-NII-2C	5.47-5.725	8	802.11ac VHT80	106	5530	MCS0	-	-
Mode 28	U-NII-2C	5.47-5.725	8	802.11ac VHT80	122	5610	MCS0	-	-
Mode 31	U-NII-3	5.725-5.85	8	802.11a	149	5745	6Mbps	-	-
Mode 32	U-NII-3	5.725-5.85	8	802.11a	157	5785	6Mbps	-	-
Mode 33	U-NII-3	5.725-5.85	8	802.11a	165	5825	6Mbps	-	-
Mode 34	U-NII-3	5.725-5.85	8	802.11n HT20	149	5745	MCS0	-	-
Mode 35	U-NII-3	5.725-5.85	8	802.11n HT20	157	5785	MCS0	-	-
Mode 36	U-NII-3	5.725-5.85	8	802.11n HT20	165	5825	MCS0	-	-
Mode 37	U-NII-3	5.725-5.85	8	802.11n HT40	151	5755	MCS0	-	-
Mode 38	U-NII-3	5.725-5.85	8	802.11n HT40	159	5795	MCS0	-	-
Mode 39	U-NII-3	5.725-5.85	8	802.11ac VHT80	155	5775	MCS0	-	-
Mode 40	U-NII-1	5.15-5.25	8	802.11n HT40	38	5190	MCS0	-	-LF
Mode 41	U-NII-3	5.725-5.85	8	802.11n HT40	159	5795	MCS0	-	-LF
Mode 42	CO_TX	5.15-5.25	8	802.11n HT40	38	5190	MCS0	-	-
Mode 42			1	LTE B13 Link					
Mode 43	CO_TX	5.15-5.25	8	802.11n HT40	38	5190	MCS0	-	-



Mode 43			1	LTE B13 Link		-	-	-	-
Mode 43		BLE	8	2M	01	2404			

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.94	48.80	54.00	-5.20	H	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	45.93	68.30	-22.37	H	Peak	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	45.97	68.30	-22.33	H	Peak	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10480.00	47.23	68.30	-21.07	H	Peak	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	10520.00	46.28	68.30	-22.02	V	Peak	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	10600.00	46.85	74.00	-27.15	V	Peak	Pass	Harmonic
6	802.11a	64	5350.80	47.25	54.00	-6.75	H	AVERAGE	Pass	Band Edge
6	802.11a	64	10640.00	46.54	74.00	-27.46	V	Peak	Pass	Harmonic
7	802.11a	100	5468.65	59.55	68.30	-8.75	H	PEAK	Pass	Band Edge
7	802.11a	100	16500.00	47.33	68.30	-20.97	H	Peak	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	16740.00	47.53	68.30	-20.77	V	Peak	Pass	Harmonic
9	802.11a	140	5725.29	58.44	68.30	-8.86	H	PEAK	Pass	Band Edge
9	802.11a	140	17100.00	48.27	68.30	-20.03	V	Peak	Pass	Harmonic
10	802.11n HT20	36	5149.58	48.44	54.00	-5.56	H	AVERAGE	Pass	Band Edge
10	802.11n HT20	36	10360.00	45.71	68.30	-22.59	V	Peak	Pass	Harmonic
11	802.11n HT20	44	-	-	-	-	-	-	-	Band Edge
11	802.11n HT20	44	10440.00	46.08	68.30	-22.22	V	Peak	Pass	Harmonic
12	802.11n HT20	48	-	-	-	-	-	-	-	Band Edge
12	802.11n HT20	48	10480.00	46.16	68.30	-22.14	V	Peak	Pass	Harmonic
13	802.11n HT20	52	-	-	-	-	-	-	-	Band Edge
13	802.11n HT20	52	10520.00	47.00	68.30	-21.30	H	Peak	Pass	Harmonic
14	802.11n HT20	60	-	-	-	-	-	-	-	Band Edge
14	802.11n HT20	60	10600.00	47.25	74.00	-26.75	H	Peak	Pass	Harmonic
15	802.11n HT20	64	5350.80	47.95	54.00	-6.05	H	AVERAGE	Pass	Band Edge
15	802.11n HT20	64	10640.00	47.06	74.00	-26.94	H	Peak	Pass	Harmonic
16	802.11n HT20	100	5467.90	62.91	68.30	-5.39	H	PEAK	Pass	Band Edge
16	802.11n HT20	100	16500.00	47.32	68.30	-20.98	H	Peak	Pass	Harmonic



17	802.11n HT20	116	-	-	-	-	-	-	-	Band Edge
17	802.11n HT20	116	16740.00	47.85	68.30	-20.45	H	Peak	Pass	Harmonic
18	802.11n HT20	140	5729.77	60.79	68.30	-7.51	H	PEAK	Pass	Band Edge
18	802.11n HT20	140	17100.00	48.48	68.30	-19.82	H	Peak	Pass	Harmonic
19	802.11n HT40	38	5149.91	48.85	54.00	-5.15	H	AVERAGE	Pass	Band Edge
19	802.11n HT40	38	10380.00	45.99	68.30	-22.31	H	Peak	Pass	Harmonic
20	802.11n HT40	46	5146.97	44.82	54.00	-9.18	H	AVERAGE	Pass	Band Edge
20	802.11n HT40	46	-	-	-	-	-	-	-	Harmonic
21	802.11n HT40	54	5360.25	45.57	54.00	-8.43	H	AVERAGE	Pass	Band Edge
21	802.11n HT40	54	-	-	-	-	-	-	-	Harmonic
22	802.11n HT40	62	5350.05	47.94	54.00	-6.06	H	AVERAGE	Pass	Band Edge
22	802.11n HT40	62	-	-	-	-	-	-	-	Harmonic
23	802.11n HT40	102	5467.76	60.70	68.30	-7.60	H	PEAK	Pass	Band Edge
23	802.11n HT40	102	-	-	-	-	-	-	-	Harmonic
24	802.11n HT40	134	5730.14	62.69	68.30	-5.61	H	PEAK	Pass	Band Edge
24	802.11n HT40	134	-	-	-	-	-	-	-	Harmonic
25	802.11ac VHT80	42	5148.89	47.27	54.00	-6.73	H	AVERAGE	Pass	Band Edge
25	802.11ac VHT80	42	-	-	-	-	-	-	-	Harmonic
26	802.11ac VHT80	58	5350.35	46.95	54.00	-7.05	H	AVERAGE	Pass	Band Edge
26	802.11ac VHT80	58	-	-	-	-	-	-	-	Harmonic
27	802.11ac VHT80	106	5458.90	48.80	54.00	-5.20	H	AVERAGE	Pass	Band Edge
27	802.11ac VHT80	106	-	-	-	-	-	-	-	Harmonic
28	802.11ac VHT80	122	5458.42	44.92	54.00	-9.08	H	AVERAGE	Pass	Band Edge
28	802.11ac VHT80	122	-	-	-	-	-	-	-	Harmonic
31	802.11a	149	5618.27	52.25	68.30	-16.05	H	PEAK	Pass	Band Edge
31	802.11a	149	17235.00	47.64	68.30	-20.66	H	Peak	Pass	Harmonic
32	802.11a	157	-	-	-	-	-	-	-	Band Edge
32	802.11a	157	17355.00	47.93	68.30	-20.37	H	Peak	Pass	Harmonic
33	802.11a	165	5935.25	53.34	68.30	-14.96	H	PEAK	Pass	Band Edge
33	802.11a	165	17475.00	47.96	68.30	-20.34	H	Peak	Pass	Harmonic
34	802.11n HT20	149	5633.50	52.33	68.30	-15.97	H	PEAK	Pass	Band Edge
34	802.11n HT20	149	17235.00	45.04	68.30	-23.26	H	Peak	Pass	Harmonic
35	802.11n HT20	157	-	-	-	-	-	-	-	Band Edge
35	802.11n HT20	157	17355.00	45.91	68.30	-22.39	H	Peak	Pass	Harmonic
36	802.11n HT20	165	5949.25	53.52	68.30	-14.78	V	PEAK	Pass	Band Edge
36	802.11n HT20	165	17475.00	47.23	68.30	-21.07	H	Peak	Pass	Harmonic







37	802.11n HT40	151	5936.55	52.47	68.30	-15.83	V	PEAK	Pass	Band Edge
37	802.11n HT40	151	-	-	-	-	-	-	-	Harmonic
38	802.11n HT40	159	5925.51	53.56	68.30	-14.74	H	PEAK	Pass	Band Edge
38	802.11n HT40	159	17385.00	45.66	68.30	-22.64	H	Peak	Pass	Harmonic
39	802.11ac VHT80	155	5927.43	52.86	68.30	-15.44	V	PEAK	Pass	Band Edge
39	802.11ac VHT80	155	-	-	-	-	-	-	-	Harmonic
40	802.11n HT40	38	41.64	32.23	40.00	-7.77	V	PEAK	Pass	LF
41	802.11n HT40	159	40.67	32.34	40.00	-7.66	V	PEAK	Pass	LF
42	CO_TX	38	5149.53	48.56	54.00	-5.44	H	AVERAGE	Pass	Band Edge
42		38	10380.00	46.32	68.30	-21.98	V	Peak	Pass	Harmonic
43	CO_TX	38	5149.34	48.75	54.00	-5.25	H	AVERAGE	Pass	Band Edge
43		38	10380.00	46.06	68.30	-22.24	H	Peak	Pass	Harmonic



Mode	1																																																																									
	Band Edge																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																									
ANT	8																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.86</td> <td>60.15</td> <td>74.00</td> <td>-13.85</td> <td>48.18</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>107</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5148.86	60.15	74.00	-13.85	48.18	36.11	8.53	32.67	107	299	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>105.61</td> <td>-----</td> <td>-----</td> <td>93.59</td> <td>36.09</td> <td>8.59</td> <td>32.66</td> <td>107</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	105.61	-----	-----	93.59	36.09	8.59	32.66	107	299	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5148.86	60.15	74.00	-13.85	48.18	36.11	8.53	32.67	107	299	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5180.00	105.61	-----	-----	93.59	36.09	8.59	32.66	107	299	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>48.80</td> <td>54.00</td> <td>-5.20</td> <td>36.82</td> <td>36.11</td> <td>8.54</td> <td>32.67</td> <td>107</td> <td>299</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5149.94	48.80	54.00	-5.20	36.82	36.11	8.54	32.67	107	299	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>99.11</td> <td>-----</td> <td>-----</td> <td>87.09</td> <td>36.09</td> <td>8.59</td> <td>32.66</td> <td>107</td> <td>299</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	99.11	-----	-----	87.09	36.09	8.59	32.66	107	299	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5149.94	48.80	54.00	-5.20	36.82	36.11	8.54	32.67	107	299	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5180.00	99.11	-----	-----	87.09	36.09	8.59	32.66	107	299	AVERAGE																																																															

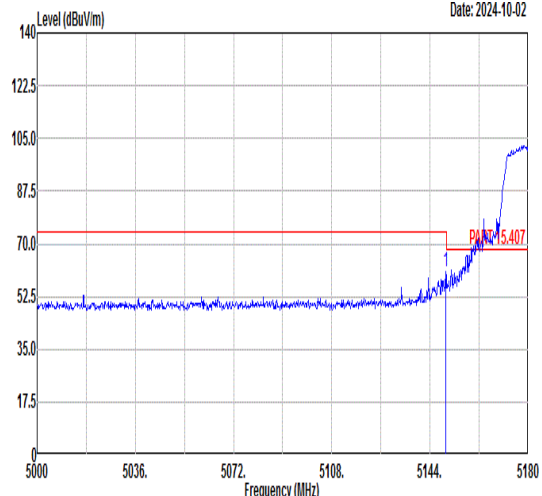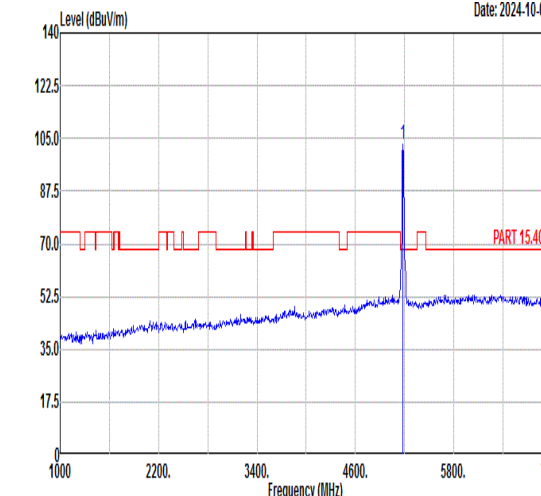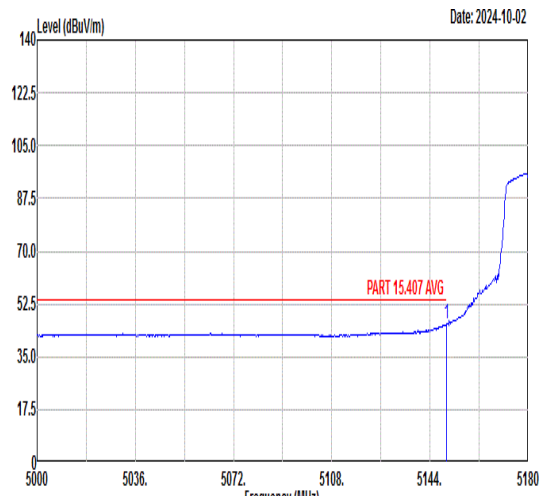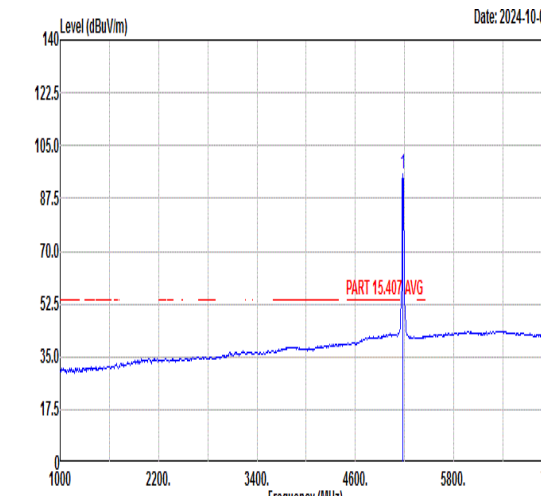

Mode	1																																																																			
	Band Edge																																																																			
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																			
ANT	8																																																																			
Pol.	Vertical	Fundamental																																																																		
Peak	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Read</th> <th>Line</th> <th>Margin</th> <th>Ant Level</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5149.76</td> <td>60.99</td> <td>74.00</td> <td>-13.01</td> <td>49.01</td> <td>36.11</td> <td>8.54</td> <td>32.67</td> <td>300</td> <td>251</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Read	Line	Margin	Ant Level	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5149.76	60.99	74.00	-13.01	49.01	36.11	8.54	32.67	300	251	PEAK	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Read</th> <th>Line</th> <th>Margin</th> <th>Ant Level</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>103.11</td> <td>-----</td> <td>-----</td> <td>91.09</td> <td>36.09</td> <td>8.59</td> <td>32.66</td> <td>300</td> <td>251</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Read	Line	Margin	Ant Level	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5180.00	103.11	-----	-----	91.09	36.09	8.59	32.66	300	251	PEAK
	Limit Freq	Level	Read	Line	Margin	Ant Level	Cable	Preamp	APos	TPos	Remark																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5149.76	60.99	74.00	-13.01	49.01	36.11	8.54	32.67	300	251	PEAK																																																										
Limit Freq	Level	Read	Line	Margin	Ant Level	Cable	Preamp	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5180.00	103.11	-----	-----	91.09	36.09	8.59	32.66	300	251	PEAK																																																										
Avg	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Read</th> <th>Line</th> <th>Margin</th> <th>Ant Level</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5149.94</td> <td>45.71</td> <td>54.00</td> <td>-8.29</td> <td>33.73</td> <td>36.11</td> <td>8.54</td> <td>32.67</td> <td>300</td> <td>251</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Read	Line	Margin	Ant Level	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5149.94	45.71	54.00	-8.29	33.73	36.11	8.54	32.67	300	251	AVERAGE	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Read</th> <th>Line</th> <th>Margin</th> <th>Ant Level</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>95.52</td> <td>-----</td> <td>-----</td> <td>83.50</td> <td>36.09</td> <td>8.59</td> <td>32.66</td> <td>300</td> <td>251</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Read	Line	Margin	Ant Level	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5180.00	95.52	-----	-----	83.50	36.09	8.59	32.66	300	251	AVERAGE
Limit Freq	Level	Read	Line	Margin	Ant Level	Cable	Preamp	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5149.94	45.71	54.00	-8.29	33.73	36.11	8.54	32.67	300	251	AVERAGE																																																										
Limit Freq	Level	Read	Line	Margin	Ant Level	Cable	Preamp	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5180.00	95.52	-----	-----	83.50	36.09	8.59	32.66	300	251	AVERAGE																																																										





Mode	1																																																																																																								
	Harmonic																																																																																																								
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																								
ANT	8																																																																																																								
Pol.	Horizontal	Vertical																																																																																																							
Peak Avg	<p>Date: 2024-10-04</p>	<p>Date: 2024-10-04</p>																																																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.93</td> <td>68.30</td> <td>-22.37</td> <td>45.90</td> <td>38.74</td> <td>12.06</td> <td>50.77</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>44.34</td> <td>74.00</td> <td>-29.66</td> <td>40.46</td> <td>40.73</td> <td>14.58</td> <td>51.43</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	45.93	68.30	-22.37	45.90	38.74	12.06	50.77	---	---	Peak	2	15540.00	44.34	74.00	-29.66	40.46	40.73	14.58	51.43	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.52</td> <td>68.30</td> <td>-22.78</td> <td>45.49</td> <td>38.74</td> <td>12.06</td> <td>50.77</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>46.37</td> <td>74.00</td> <td>-27.63</td> <td>42.49</td> <td>40.73</td> <td>14.58</td> <td>51.43</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	45.52	68.30	-22.78	45.49	38.74	12.06	50.77	---	---	Peak	2	15540.00	46.37	74.00	-27.63	42.49	40.73	14.58	51.43	---	---
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	10360.00	45.93	68.30	-22.37	45.90	38.74	12.06	50.77	---	---	Peak																																																																																														
2	15540.00	44.34	74.00	-29.66	40.46	40.73	14.58	51.43	---	---	Peak																																																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	10360.00	45.52	68.30	-22.78	45.49	38.74	12.06	50.77	---	---	Peak																																																																																														
2	15540.00	46.37	74.00	-27.63	42.49	40.73	14.58	51.43	---	---	Peak																																																																																														



Mode	2																																																																																																								
	Harmonic																																																																																																								
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																								
ANT	8																																																																																																								
Pol.	Horizontal	Vertical																																																																																																							
Peak Avg	<p>Date: 2024-10-04</p>	<p>Date: 2024-10-04</p>																																																																																																							
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>45.97</td> <td>68.30</td> <td>-22.33</td> <td>45.86</td> <td>38.78</td> <td>12.12</td> <td>50.79</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>45.53</td> <td>74.00</td> <td>-28.47</td> <td>41.59</td> <td>40.83</td> <td>14.64</td> <td>51.53</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	45.97	68.30	-22.33	45.86	38.78	12.12	50.79	---	---	Peak	2	15660.00	45.53	74.00	-28.47	41.59	40.83	14.64	51.53	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>45.77</td> <td>68.30</td> <td>-22.53</td> <td>45.66</td> <td>38.78</td> <td>12.12</td> <td>50.79</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>45.84</td> <td>74.00</td> <td>-28.16</td> <td>41.90</td> <td>40.83</td> <td>14.64</td> <td>51.53</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	45.77	68.30	-22.53	45.66	38.78	12.12	50.79	---	---	Peak	2	15660.00	45.84	74.00	-28.16	41.90	40.83	14.64	51.53	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	10440.00	45.97	68.30	-22.33	45.86	38.78	12.12	50.79	---	---	Peak																																																																																														
2	15660.00	45.53	74.00	-28.47	41.59	40.83	14.64	51.53	---	---	Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	10440.00	45.77	68.30	-22.53	45.66	38.78	12.12	50.79	---	---	Peak																																																																																														
2	15660.00	45.84	74.00	-28.16	41.90	40.83	14.64	51.53	---	---	Peak																																																																																														



Mode	3																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																
ANT	8																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-10-05</p>	<p>Date: 2024-10-05</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>47.23</td> <td>68.30</td> <td>-21.07</td> <td>47.09</td> <td>38.79</td> <td>12.15</td> <td>50.80</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>47.38</td> <td>74.00</td> <td>-26.62</td> <td>43.42</td> <td>40.88</td> <td>14.66</td> <td>51.58</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	47.23	68.30	-21.07	47.09	38.79	12.15	50.80	--- --- Peak	2	15720.00	47.38	74.00	-26.62	43.42	40.88	14.66	51.58	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>47.22</td> <td>68.30</td> <td>-21.08</td> <td>47.08</td> <td>38.79</td> <td>12.15</td> <td>50.80</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>46.66</td> <td>74.00</td> <td>-27.34</td> <td>42.70</td> <td>40.88</td> <td>14.66</td> <td>51.58</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	47.22	68.30	-21.08	47.08	38.79	12.15	50.80	--- --- Peak	2	15720.00	46.66	74.00	-27.34	42.70	40.88	14.66	51.58
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	10480.00	47.23	68.30	-21.07	47.09	38.79	12.15	50.80	--- --- Peak																																																																																								
2	15720.00	47.38	74.00	-26.62	43.42	40.88	14.66	51.58	--- --- Peak																																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	10480.00	47.22	68.30	-21.08	47.08	38.79	12.15	50.80	--- --- Peak																																																																																								
2	15720.00	46.66	74.00	-27.34	42.70	40.88	14.66	51.58	--- --- Peak																																																																																								



Mode	4																																																																																					
	Harmonic																																																																																					
	U-NII-2A_5.25-5.35_802.11a_CH52_5280MHz																																																																																					
ANT	8																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<p>Date: 2024-10-05</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>46.18</td> <td>68.30</td> <td>-22.12</td> <td>45.99</td> <td>38.81</td> <td>12.18</td> <td>50.80</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>46.04</td> <td>74.00</td> <td>-27.96</td> <td>42.05</td> <td>40.92</td> <td>14.69</td> <td>51.62</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	cm	deg	Remark	1	10520.00	46.18	68.30	-22.12	45.99	38.81	12.18	50.80	---	---	Peak	2	15780.00	46.04	74.00	-27.96	42.05	40.92	14.69	51.62	---	---	Peak	<p>Date: 2024-10-05</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>46.28</td> <td>68.30</td> <td>-22.02</td> <td>46.09</td> <td>38.81</td> <td>12.18</td> <td>50.80</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>46.57</td> <td>74.00</td> <td>-27.43</td> <td>42.58</td> <td>40.92</td> <td>14.69</td> <td>51.62</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	cm	deg	Remark	1	10520.00	46.28	68.30	-22.02	46.09	38.81	12.18	50.80	---	---	Peak	2	15780.00	46.57	74.00	-27.43	42.58	40.92	14.69	51.62	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	cm	deg	Remark																																																																												
1	10520.00	46.18	68.30	-22.12	45.99	38.81	12.18	50.80	---	---	Peak																																																																											
2	15780.00	46.04	74.00	-27.96	42.05	40.92	14.69	51.62	---	---	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	cm	deg	Remark																																																																												
1	10520.00	46.28	68.30	-22.02	46.09	38.81	12.18	50.80	---	---	Peak																																																																											
2	15780.00	46.57	74.00	-27.43	42.58	40.92	14.69	51.62	---	---	Peak																																																																											



Mode	5																																																																																																
	Harmonic																																																																																																
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																
ANT	8																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-10-05</p>	<p>Date: 2024-10-05</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>46.54</td> <td>74.00</td> <td>-27.46</td> <td>46.27</td> <td>38.84</td> <td>12.23</td> <td>50.80</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>44.90</td> <td>74.00</td> <td>-29.10</td> <td>40.85</td> <td>41.02</td> <td>14.75</td> <td>51.72</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10600.00	46.54	74.00	-27.46	46.27	38.84	12.23	50.80	--- --- Peak	2	15900.00	44.90	74.00	-29.10	40.85	41.02	14.75	51.72	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>46.85</td> <td>74.00</td> <td>-27.15</td> <td>46.58</td> <td>38.84</td> <td>12.23</td> <td>50.80</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>44.87</td> <td>74.00</td> <td>-29.13</td> <td>40.82</td> <td>41.02</td> <td>14.75</td> <td>51.72</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10600.00	46.85	74.00	-27.15	46.58	38.84	12.23	50.80	--- --- Peak	2	15900.00	44.87	74.00	-29.13	40.82	41.02	14.75	51.72
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	10600.00	46.54	74.00	-27.46	46.27	38.84	12.23	50.80	--- --- Peak																																																																																								
2	15900.00	44.90	74.00	-29.10	40.85	41.02	14.75	51.72	--- --- Peak																																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	10600.00	46.85	74.00	-27.15	46.58	38.84	12.23	50.80	--- --- Peak																																																																																								
2	15900.00	44.87	74.00	-29.13	40.82	41.02	14.75	51.72	--- --- Peak																																																																																								



Mode	6																																																																									
	Band Edge																																																																									
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																									
ANT	8																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.64</td> <td>62.12</td> <td>74.00</td> <td>-11.88</td> <td>49.39</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> <td>105</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5351.64	62.12	74.00	-11.88	49.39	35.99	9.37	32.63	105	300	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.07</td> <td>-----</td> <td>-----</td> <td>93.49</td> <td>36.01</td> <td>9.21</td> <td>32.64</td> <td>105</td> <td>300</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	106.07	-----	-----	93.49	36.01	9.21	32.64	105	300	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5351.64	62.12	74.00	-11.88	49.39	35.99	9.37	32.63	105	300	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5320.00	106.07	-----	-----	93.49	36.01	9.21	32.64	105	300	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.80</td> <td>47.25</td> <td>54.00</td> <td>-6.75</td> <td>34.52</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> <td>105</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5350.80	47.25	54.00	-6.75	34.52	35.99	9.37	32.63	105	300	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>99.78</td> <td>-----</td> <td>-----</td> <td>87.20</td> <td>36.01</td> <td>9.21</td> <td>32.64</td> <td>105</td> <td>300</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	99.78	-----	-----	87.20	36.01	9.21	32.64	105	300	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5350.80	47.25	54.00	-6.75	34.52	35.99	9.37	32.63	105	300	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5320.00	99.78	-----	-----	87.20	36.01	9.21	32.64	105	300	AVERAGE																																																															



Mode	6																																																																									
	Band Edge																																																																									
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																									
ANT	8																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5355.28</td> <td>58.29</td> <td>74.00</td> <td>-15.71</td> <td>45.54</td> <td>35.99</td> <td>9.39</td> <td>32.63</td> <td>288</td> <td>251</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5355.28	58.29	74.00	-15.71	45.54	35.99	9.39	32.63	288	251	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>102.80</td> <td>-----</td> <td>-----</td> <td>90.22</td> <td>36.01</td> <td>9.21</td> <td>32.64</td> <td>288</td> <td>251</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	102.80	-----	-----	90.22	36.01	9.21	32.64	288	251	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5355.28	58.29	74.00	-15.71	45.54	35.99	9.39	32.63	288	251	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5320.00	102.80	-----	-----	90.22	36.01	9.21	32.64	288	251	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.10</td> <td>44.41</td> <td>54.00</td> <td>-9.59</td> <td>31.68</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> <td>288</td> <td>251</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5350.10	44.41	54.00	-9.59	31.68	35.99	9.37	32.63	288	251	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>96.31</td> <td>-----</td> <td>-----</td> <td>83.73</td> <td>36.01</td> <td>9.21</td> <td>32.64</td> <td>288</td> <td>251</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	96.31	-----	-----	83.73	36.01	9.21	32.64	288	251	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5350.10	44.41	54.00	-9.59	31.68	35.99	9.37	32.63	288	251	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5320.00	96.31	-----	-----	83.73	36.01	9.21	32.64	288	251	AVERAGE																																																															



Mode	6																																																																																																								
	Harmonic																																																																																																								
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																								
ANT	8																																																																																																								
Pol.	Horizontal	Vertical																																																																																																							
Peak Avg	<p>Date: 2024-10-05</p>	<p>Date: 2024-10-05</p>																																																																																																							
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>45.25</td> <td>74.00</td> <td>-28.75</td> <td>44.93</td> <td>38.86</td> <td>12.26</td> <td>50.80</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>44.94</td> <td>74.00</td> <td>-29.06</td> <td>40.87</td> <td>41.07</td> <td>14.77</td> <td>51.77</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	45.25	74.00	-28.75	44.93	38.86	12.26	50.80	---	---	Peak	2	15960.00	44.94	74.00	-29.06	40.87	41.07	14.77	51.77	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>46.54</td> <td>74.00</td> <td>-27.46</td> <td>46.22</td> <td>38.86</td> <td>12.26</td> <td>50.80</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>46.30</td> <td>74.00</td> <td>-27.70</td> <td>42.23</td> <td>41.07</td> <td>14.77</td> <td>51.77</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	46.54	74.00	-27.46	46.22	38.86	12.26	50.80	---	---	Peak	2	15960.00	46.30	74.00	-27.70	42.23	41.07	14.77	51.77	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	10640.00	45.25	74.00	-28.75	44.93	38.86	12.26	50.80	---	---	Peak																																																																																														
2	15960.00	44.94	74.00	-29.06	40.87	41.07	14.77	51.77	---	---	Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	10640.00	46.54	74.00	-27.46	46.22	38.86	12.26	50.80	---	---	Peak																																																																																														
2	15960.00	46.30	74.00	-27.70	42.23	41.07	14.77	51.77	---	---	Peak																																																																																														





	7																																																																																											
Mode	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																											
ANT	8																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	<p style="text-align: right;">Date: 2024-10-01</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.55</td> <td>56.10</td> <td>74.00</td> <td>-17.90</td> <td>43.09</td> <td>35.93</td> <td>9.69</td> <td>32.61</td> <td>100</td> <td>298</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.65</td> <td>59.55</td> <td>68.30</td> <td>-8.75</td> <td>46.55</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>100</td> <td>298</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5457.55	56.10	74.00	-17.90	43.09	35.93	9.69	32.61	100	298	PEAK	2	5468.65	59.55	68.30	-8.75	46.55	35.92	9.69	32.61	100	298	PEAK	<p style="text-align: right;">Date: 2024-10-01</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>106.60</td> <td>-----</td> <td>-----</td> <td>93.59</td> <td>35.90</td> <td>9.71</td> <td>32.60</td> <td>100</td> <td>298</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	106.60	-----	-----	93.59	35.90	9.71	32.60	100	298	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1	5457.55	56.10	74.00	-17.90	43.09	35.93	9.69	32.61	100	298	PEAK																																																																																	
2	5468.65	59.55	68.30	-8.75	46.55	35.92	9.69	32.61	100	298	PEAK																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1	5500.00	106.60	-----	-----	93.59	35.90	9.71	32.60	100	298	PEAK																																																																																	
Avg	<p style="text-align: right;">Date: 2024-10-01</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.75</td> <td>44.84</td> <td>54.00</td> <td>-9.16</td> <td>31.84</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>100</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.75	44.84	54.00	-9.16	31.84	35.92	9.69	32.61	100	298	AVERAGE	<p style="text-align: right;">Date: 2024-10-01</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>99.81</td> <td>-----</td> <td>-----</td> <td>86.80</td> <td>35.90</td> <td>9.71</td> <td>32.60</td> <td>100</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	99.81	-----	-----	86.80	35.90	9.71	32.60	100	298	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1	5458.75	44.84	54.00	-9.16	31.84	35.92	9.69	32.61	100	298	AVERAGE																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1	5500.00	99.81	-----	-----	86.80	35.90	9.71	32.60	100	298	AVERAGE																																																																																	



	7																																																																							
Mode	Band Edge																																																																							
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																							
ANT	8																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.65</td> <td>53.78</td> <td>74.00</td> <td>-20.22</td> <td>40.78</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>400</td> <td>250 PEAK</td> </tr> <tr> <td>2 5470.00</td> <td>56.03</td> <td>68.30</td> <td>-12.27</td> <td>43.03</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>400</td> <td>250 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 5459.65	53.78	74.00	-20.22	40.78	35.92	9.69	32.61	400	250 PEAK	2 5470.00	56.03	68.30	-12.27	43.03	35.92	9.69	32.61	400	250 PEAK	<table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>100.66</td> <td>87.65</td> <td>13.01</td> <td>35.90</td> <td>9.71</td> <td>32.60</td> <td>400</td> <td>250</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 5500.00	100.66	87.65	13.01	35.90	9.71	32.60	400	250	PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5459.65	53.78	74.00	-20.22	40.78	35.92	9.69	32.61	400	250 PEAK																																																															
2 5470.00	56.03	68.30	-12.27	43.03	35.92	9.69	32.61	400	250 PEAK																																																															
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5500.00	100.66	87.65	13.01	35.90	9.71	32.60	400	250	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.35</td> <td>42.92</td> <td>54.00</td> <td>-11.08</td> <td>29.92</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>400</td> <td>250 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 5459.35	42.92	54.00	-11.08	29.92	35.92	9.69	32.61	400	250 AVERAGE	<table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>93.84</td> <td>80.83</td> <td>13.01</td> <td>35.90</td> <td>9.71</td> <td>32.60</td> <td>400</td> <td>250</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 5500.00	93.84	80.83	13.01	35.90	9.71	32.60	400	250	AVERAGE										
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5459.35	42.92	54.00	-11.08	29.92	35.92	9.69	32.61	400	250 AVERAGE																																																															
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5500.00	93.84	80.83	13.01	35.90	9.71	32.60	400	250	AVERAGE																																																															






Mode	7																																																																																														
	Harmonic																																																																																														
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																														
ANT	8																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<p>Date: 2024-10-05</p>	<p>Date: 2024-10-05</p>																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.85</td> <td>74.00</td> <td>-27.15</td> <td>46.13</td> <td>39.00</td> <td>12.52</td> <td>50.80</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>47.33</td> <td>68.30</td> <td>-20.97</td> <td>42.61</td> <td>41.35</td> <td>15.17</td> <td>51.80</td> <td>--- --- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11000.00	46.85	74.00	-27.15	46.13	39.00	12.52	50.80	--- --- Peak	2	16500.00	47.33	68.30	-20.97	42.61	41.35	15.17	51.80	--- --- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.87</td> <td>74.00</td> <td>-27.13</td> <td>46.15</td> <td>39.00</td> <td>12.52</td> <td>50.80</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>46.32</td> <td>68.30</td> <td>-21.98</td> <td>41.60</td> <td>41.35</td> <td>15.17</td> <td>51.80</td> <td>--- --- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11000.00	46.87	74.00	-27.13	46.15	39.00	12.52	50.80	--- --- Peak	2	16500.00	46.32	68.30	-21.98	41.60	41.35	15.17	51.80
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	11000.00	46.85	74.00	-27.15	46.13	39.00	12.52	50.80	--- --- Peak																																																																																						
2	16500.00	47.33	68.30	-20.97	42.61	41.35	15.17	51.80	--- --- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	11000.00	46.87	74.00	-27.13	46.15	39.00	12.52	50.80	--- --- Peak																																																																																						
2	16500.00	46.32	68.30	-21.98	41.60	41.35	15.17	51.80	--- --- Peak																																																																																						



Mode	8																																																																																														
	Harmonic																																																																																														
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																														
ANT	8																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<p style="text-align: right;">Date: 2024-10-05</p>	<p style="text-align: right;">Date: 2024-10-05</p>																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>47.50</td> <td>74.00</td> <td>-26.50</td> <td>46.57</td> <td>39.06</td> <td>12.64</td> <td>50.77</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>47.26</td> <td>68.30</td> <td>-21.04</td> <td>42.19</td> <td>41.47</td> <td>15.35</td> <td>51.75</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11160.00	47.50	74.00	-26.50	46.57	39.06	12.64	50.77	--- Peak	2	16740.00	47.26	68.30	-21.04	42.19	41.47	15.35	51.75	--- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>47.59</td> <td>74.00</td> <td>-26.41</td> <td>46.66</td> <td>39.06</td> <td>12.64</td> <td>50.77</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>47.53</td> <td>68.30</td> <td>-20.77</td> <td>42.46</td> <td>41.47</td> <td>15.35</td> <td>51.75</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11160.00	47.59	74.00	-26.41	46.66	39.06	12.64	50.77	--- Peak	2	16740.00	47.53	68.30	-20.77	42.46	41.47	15.35	51.75
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	11160.00	47.50	74.00	-26.50	46.57	39.06	12.64	50.77	--- Peak																																																																																						
2	16740.00	47.26	68.30	-21.04	42.19	41.47	15.35	51.75	--- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	11160.00	47.59	74.00	-26.41	46.66	39.06	12.64	50.77	--- Peak																																																																																						
2	16740.00	47.53	68.30	-20.77	42.46	41.47	15.35	51.75	--- Peak																																																																																						

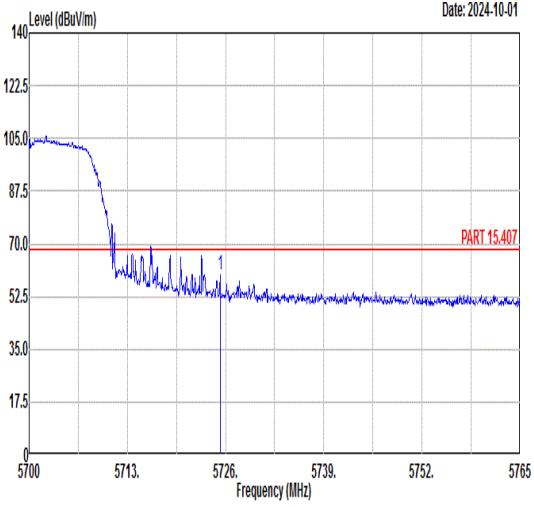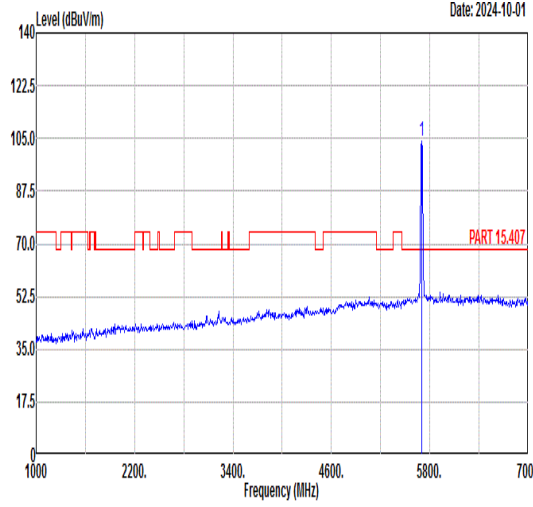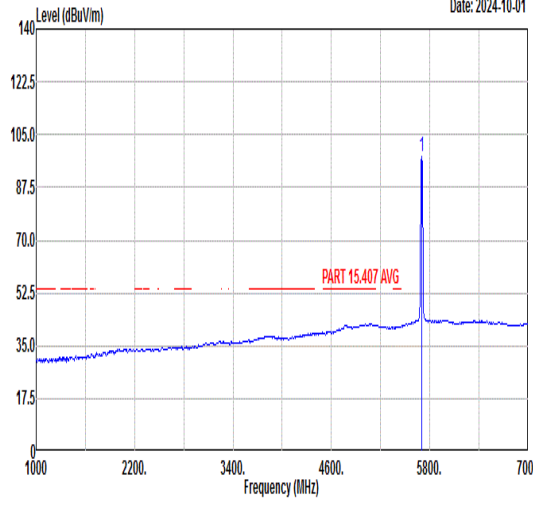

	<b>9</b>																																																																					
<b>Mode</b>	<b>Band Edge</b>																																																																					
	<b>U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz</b>																																																																					
<b>ANT</b>	<b>8</b>																																																																					
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																				
<b>Peak</b>	 <p style="text-align: right;">Date: 2024-10-01</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5725.29</td> <td>59.44</td> <td>68.30</td> <td>-8.86</td> <td>45.89</td> <td>36.22</td> <td>10.02</td> <td>32.69</td> <td>109</td> <td>297 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5725.29	59.44	68.30	-8.86	45.89	36.22	10.02	32.69	109	297 PEAK	 <p style="text-align: right;">Date: 2024-10-01</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>104.31</td> <td>-----</td> <td>-----</td> <td>90.84</td> <td>36.18</td> <td>9.97</td> <td>32.68</td> <td>109</td> <td>297 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	104.31	-----	-----	90.84	36.18	9.97	32.68	109	297 PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5725.29	59.44	68.30	-8.86	45.89	36.22	10.02	32.69	109	297 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5700.00	104.31	-----	-----	90.84	36.18	9.97	32.68	109	297 PEAK																																																													
<b>Avg</b>	<b>Blank</b>	 <p style="text-align: right;">Date: 2024-10-01</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>97.91</td> <td>-----</td> <td>-----</td> <td>84.44</td> <td>36.18</td> <td>9.97</td> <td>32.68</td> <td>109</td> <td>297 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	97.91	-----	-----	84.44	36.18	9.97	32.68	109	297 AVERAGE																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5700.00	97.91	-----	-----	84.44	36.18	9.97	32.68	109	297 AVERAGE																																																													



Mode	9																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																									
ANT	8																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5725.87</td> <td>87.36</td> <td>55.09</td> <td>68.30</td> <td>-13.21</td> <td>41.54</td> <td>36.22</td> <td>10.02</td> <td>32.69</td> <td>400</td> <td>218</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5725.87	87.36	55.09	68.30	-13.21	41.54	36.22	10.02	32.69	400	218	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>97.36</td> <td>83.89</td> <td>68.30</td> <td>-13.21</td> <td>41.54</td> <td>36.22</td> <td>10.02</td> <td>32.69</td> <td>400</td> <td>218</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5700.00	97.36	83.89	68.30	-13.21	41.54	36.22	10.02	32.69	400	218	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1 5725.87	87.36	55.09	68.30	-13.21	41.54	36.22	10.02	32.69	400	218	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1 5700.00	97.36	83.89	68.30	-13.21	41.54	36.22	10.02	32.69	400	218	PEAK																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>90.65</td> <td>77.18</td> <td>68.30</td> <td>-13.21</td> <td>41.54</td> <td>36.22</td> <td>10.02</td> <td>32.69</td> <td>400</td> <td>218</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5700.00	90.65	77.18	68.30	-13.21	41.54	36.22	10.02	32.69	400	218	AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1 5700.00	90.65	77.18	68.30	-13.21	41.54	36.22	10.02	32.69	400	218	AVERAGE																																																															







Mode	9																																																																																														
	Harmonic																																																																																														
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																														
ANT	8																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<p>Date: 2024-10-05</p>	<p>Date: 2024-10-05</p>																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>45.66</td> <td>74.00</td> <td>-28.34</td> <td>44.41</td> <td>39.16</td> <td>12.81</td> <td>50.72</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>47.52</td> <td>68.30</td> <td>-20.78</td> <td>41.99</td> <td>41.71</td> <td>15.62</td> <td>51.80</td> <td>--- --- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11400.00	45.66	74.00	-28.34	44.41	39.16	12.81	50.72	--- --- Peak	2	17100.00	47.52	68.30	-20.78	41.99	41.71	15.62	51.80	--- --- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>46.23</td> <td>74.00</td> <td>-27.77</td> <td>44.98</td> <td>39.16</td> <td>12.81</td> <td>50.72</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>48.27</td> <td>68.30</td> <td>-20.03</td> <td>42.74</td> <td>41.71</td> <td>15.62</td> <td>51.80</td> <td>--- --- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11400.00	46.23	74.00	-27.77	44.98	39.16	12.81	50.72	--- --- Peak	2	17100.00	48.27	68.30	-20.03	42.74	41.71	15.62	51.80
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	11400.00	45.66	74.00	-28.34	44.41	39.16	12.81	50.72	--- --- Peak																																																																																						
2	17100.00	47.52	68.30	-20.78	41.99	41.71	15.62	51.80	--- --- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	11400.00	46.23	74.00	-27.77	44.98	39.16	12.81	50.72	--- --- Peak																																																																																						
2	17100.00	48.27	68.30	-20.03	42.74	41.71	15.62	51.80	--- --- Peak																																																																																						



Mode	10																																																																									
	Band Edge																																																																									
	U-NII-1_5.15-5.25_802.11n_HT20_CH36_5180MHz																																																																									
ANT	8																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.68</td> <td>63.30</td> <td>74.00</td> <td>-10.70</td> <td>51.33</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>113</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5148.68	63.30	74.00	-10.70	51.33	36.11	8.53	32.67	113	297	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>104.89</td> <td>-----</td> <td>-----</td> <td>92.87</td> <td>36.09</td> <td>8.59</td> <td>32.66</td> <td>113</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	104.89	-----	-----	92.87	36.09	8.59	32.66	113	297	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5148.68	63.30	74.00	-10.70	51.33	36.11	8.53	32.67	113	297	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5180.00	104.89	-----	-----	92.87	36.09	8.59	32.66	113	297	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.58</td> <td>48.44</td> <td>54.00</td> <td>-5.56</td> <td>36.47</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>113</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5149.58	48.44	54.00	-5.56	36.47	36.11	8.53	32.67	113	297	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>98.16</td> <td>-----</td> <td>-----</td> <td>86.14</td> <td>36.09</td> <td>8.59</td> <td>32.66</td> <td>113</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	98.16	-----	-----	86.14	36.09	8.59	32.66	113	297	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5149.58	48.44	54.00	-5.56	36.47	36.11	8.53	32.67	113	297	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5180.00	98.16	-----	-----	86.14	36.09	8.59	32.66	113	297	AVERAGE																																																															



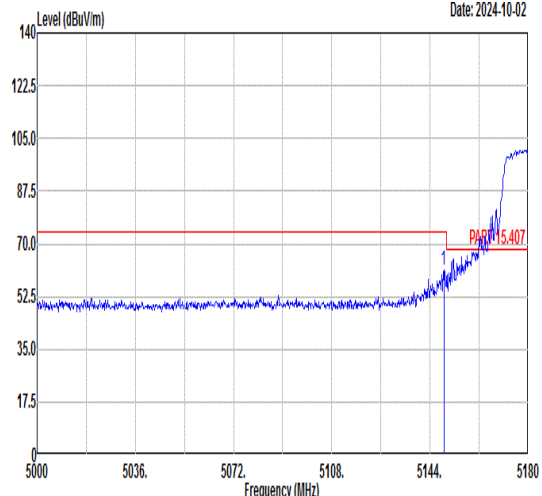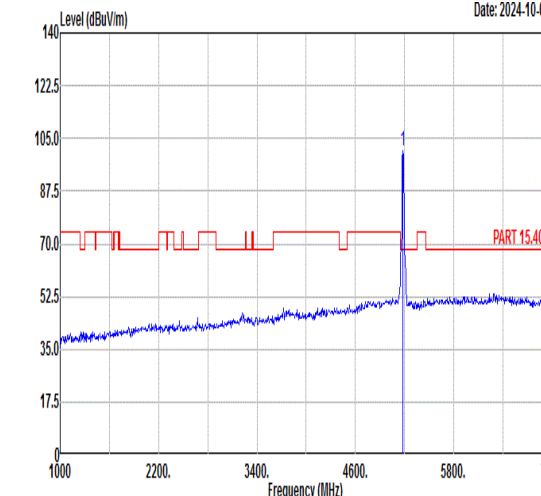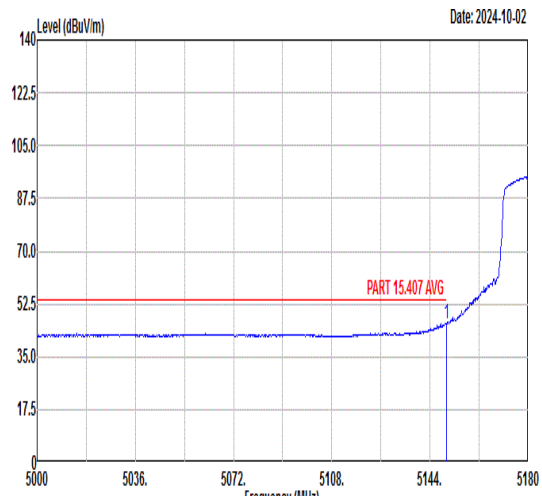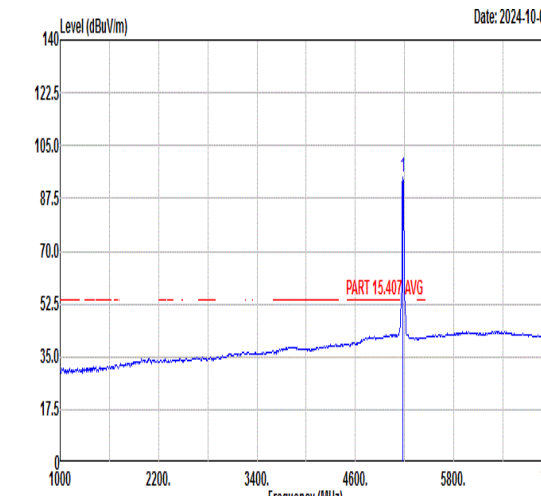

Mode	10																																																																									
	Band Edge																																																																									
	U-NII-1_5.15-5.25_802.11n_HT20_CH36_5180MHz																																																																									
ANT	8																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.04</td> <td>61.36</td> <td>74.00</td> <td>-12.64</td> <td>49.39</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>273</td> <td>250</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5149.04	61.36	74.00	-12.64	49.39	36.11	8.53	32.67	273	250	PEAK	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>101.09</td> <td>-----</td> <td>-----</td> <td>89.07</td> <td>36.09</td> <td>8.59</td> <td>32.66</td> <td>273</td> <td>250</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	101.09	-----	-----	89.07	36.09	8.59	32.66	273	250	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5149.04	61.36	74.00	-12.64	49.39	36.11	8.53	32.67	273	250	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5180.00	101.09	-----	-----	89.07	36.09	8.59	32.66	273	250	PEAK																																																															
Avg	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>45.88</td> <td>54.00</td> <td>-8.12</td> <td>33.90</td> <td>36.11</td> <td>8.54</td> <td>32.67</td> <td>273</td> <td>250</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5149.94	45.88	54.00	-8.12	33.90	36.11	8.54	32.67	273	250	AVERAGE	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>94.47</td> <td>-----</td> <td>-----</td> <td>82.45</td> <td>36.09</td> <td>8.59</td> <td>32.66</td> <td>273</td> <td>250</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	94.47	-----	-----	82.45	36.09	8.59	32.66	273	250	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5149.94	45.88	54.00	-8.12	33.90	36.11	8.54	32.67	273	250	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5180.00	94.47	-----	-----	82.45	36.09	8.59	32.66	273	250	AVERAGE																																																															



Mode	10																																																																																														
	Harmonic																																																																																														
	U-NII-1_5.15-5.25_802.11n_HT20_CH36_5180MHz																																																																																														
ANT	8																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<p>Date: 2024-10-05</p>	<p>Date: 2024-10-05</p>																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.45</td> <td>68.30</td> <td>-22.85</td> <td>45.42</td> <td>38.74</td> <td>12.06</td> <td>50.77</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>44.72</td> <td>74.00</td> <td>-29.28</td> <td>40.84</td> <td>40.73</td> <td>14.58</td> <td>51.43</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	45.45	68.30	-22.85	45.42	38.74	12.06	50.77	--- Peak	2	15540.00	44.72	74.00	-29.28	40.84	40.73	14.58	51.43	--- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.71</td> <td>68.30</td> <td>-22.59</td> <td>45.68</td> <td>38.74</td> <td>12.06</td> <td>50.77</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>46.36</td> <td>74.00</td> <td>-27.64</td> <td>42.48</td> <td>40.73</td> <td>14.58</td> <td>51.43</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	45.71	68.30	-22.59	45.68	38.74	12.06	50.77	--- Peak	2	15540.00	46.36	74.00	-27.64	42.48	40.73	14.58	51.43
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	10360.00	45.45	68.30	-22.85	45.42	38.74	12.06	50.77	--- Peak																																																																																						
2	15540.00	44.72	74.00	-29.28	40.84	40.73	14.58	51.43	--- Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	10360.00	45.71	68.30	-22.59	45.68	38.74	12.06	50.77	--- Peak																																																																																						
2	15540.00	46.36	74.00	-27.64	42.48	40.73	14.58	51.43	--- Peak																																																																																						



Mode	11																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11n_HT20_CH44_5220MHz																																																																																																
ANT	8																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-10-05</p>	<p>Date: 2024-10-05</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>44.88</td> <td>68.30</td> <td>-23.42</td> <td>44.77</td> <td>38.78</td> <td>12.12</td> <td>50.79</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>2 15660.00</td> <td>45.32</td> <td>74.00</td> <td>-28.68</td> <td>41.38</td> <td>40.83</td> <td>14.64</td> <td>51.53</td> <td>---</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10440.00	44.88	68.30	-23.42	44.77	38.78	12.12	50.79	---	--- Peak	2 15660.00	45.32	74.00	-28.68	41.38	40.83	14.64	51.53	---	--- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>46.08</td> <td>68.30</td> <td>-22.22</td> <td>45.97</td> <td>38.78</td> <td>12.12</td> <td>50.79</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>2 15660.00</td> <td>47.29</td> <td>74.00</td> <td>-26.71</td> <td>43.35</td> <td>40.83</td> <td>14.64</td> <td>51.53</td> <td>---</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10440.00	46.08	68.30	-22.22	45.97	38.78	12.12	50.79	---	--- Peak	2 15660.00	47.29	74.00	-26.71	43.35	40.83	14.64	51.53	---
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 10440.00	44.88	68.30	-23.42	44.77	38.78	12.12	50.79	---	--- Peak																																																																																								
2 15660.00	45.32	74.00	-28.68	41.38	40.83	14.64	51.53	---	--- Peak																																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 10440.00	46.08	68.30	-22.22	45.97	38.78	12.12	50.79	---	--- Peak																																																																																								
2 15660.00	47.29	74.00	-26.71	43.35	40.83	14.64	51.53	---	--- Peak																																																																																								



Mode	12																																																																																																								
	Harmonic																																																																																																								
	U-NII-1_5.15-5.25_802.11n_HT20_CH48_5240MHz																																																																																																								
ANT	8																																																																																																								
Pol.	Horizontal	Vertical																																																																																																							
Peak Avg	<p>Date: 2024-10-05</p>	<p>Date: 2024-10-05</p>																																																																																																							
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>45.34</td> <td>68.30</td> <td>-22.96</td> <td>45.20</td> <td>38.79</td> <td>12.15</td> <td>50.80</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>44.71</td> <td>74.00</td> <td>-29.29</td> <td>40.75</td> <td>40.88</td> <td>14.66</td> <td>51.58</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	45.34	68.30	-22.96	45.20	38.79	12.15	50.80	---	---	Peak	2	15720.00	44.71	74.00	-29.29	40.75	40.88	14.66	51.58	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.16</td> <td>68.30</td> <td>-22.14</td> <td>46.02</td> <td>38.79</td> <td>12.15</td> <td>50.80</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>46.23</td> <td>74.00</td> <td>-27.77</td> <td>42.27</td> <td>40.88</td> <td>14.66</td> <td>51.58</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	46.16	68.30	-22.14	46.02	38.79	12.15	50.80	---	---	Peak	2	15720.00	46.23	74.00	-27.77	42.27	40.88	14.66	51.58	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	10480.00	45.34	68.30	-22.96	45.20	38.79	12.15	50.80	---	---	Peak																																																																																														
2	15720.00	44.71	74.00	-29.29	40.75	40.88	14.66	51.58	---	---	Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	10480.00	46.16	68.30	-22.14	46.02	38.79	12.15	50.80	---	---	Peak																																																																																														
2	15720.00	46.23	74.00	-27.77	42.27	40.88	14.66	51.58	---	---	Peak																																																																																														



Mode	13																																																																																																
	Harmonic																																																																																																
	U-NII-2A_5.25-5.35_802.11n_HT20_CH52_5280MHz																																																																																																
ANT	8																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-10-05</p>	<p>Date: 2024-10-05</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>47.00</td> <td>68.30</td> <td>-21.30</td> <td>46.81</td> <td>38.81</td> <td>12.18</td> <td>50.80</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>46.97</td> <td>74.00</td> <td>-27.03</td> <td>42.98</td> <td>40.92</td> <td>14.69</td> <td>51.62</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10520.00	47.00	68.30	-21.30	46.81	38.81	12.18	50.80	--- --- Peak	2	15780.00	46.97	74.00	-27.03	42.98	40.92	14.69	51.62	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>45.70</td> <td>68.30</td> <td>-22.60</td> <td>45.51</td> <td>38.81</td> <td>12.18</td> <td>50.80</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>46.75</td> <td>74.00</td> <td>-27.25</td> <td>42.76</td> <td>40.92</td> <td>14.69</td> <td>51.62</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10520.00	45.70	68.30	-22.60	45.51	38.81	12.18	50.80	--- --- Peak	2	15780.00	46.75	74.00	-27.25	42.76	40.92	14.69	51.62
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	10520.00	47.00	68.30	-21.30	46.81	38.81	12.18	50.80	--- --- Peak																																																																																								
2	15780.00	46.97	74.00	-27.03	42.98	40.92	14.69	51.62	--- --- Peak																																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	10520.00	45.70	68.30	-22.60	45.51	38.81	12.18	50.80	--- --- Peak																																																																																								
2	15780.00	46.75	74.00	-27.25	42.76	40.92	14.69	51.62	--- --- Peak																																																																																								



Mode	14																																																																																														
	Harmonic																																																																																														
	U-NII-2A_5.25-5.35_802.11n_HT20_CH60_5300MHz																																																																																														
ANT	8																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>47.25</td> <td>74.00</td> <td>-26.75</td> <td>46.98</td> <td>38.84</td> <td>12.23</td> <td>50.80</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>46.11</td> <td>74.00</td> <td>-27.89</td> <td>42.06</td> <td>41.02</td> <td>14.75</td> <td>51.72</td> <td>--- --- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	10600.00	47.25	74.00	-26.75	46.98	38.84	12.23	50.80	--- --- Peak	2	15900.00	46.11	74.00	-27.89	42.06	41.02	14.75	51.72	--- --- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>45.19</td> <td>74.00</td> <td>-28.81</td> <td>44.92</td> <td>38.84</td> <td>12.23</td> <td>50.80</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>46.06</td> <td>74.00</td> <td>-27.94</td> <td>42.01</td> <td>41.02</td> <td>14.75</td> <td>51.72</td> <td>--- --- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	10600.00	45.19	74.00	-28.81	44.92	38.84	12.23	50.80	--- --- Peak	2	15900.00	46.06	74.00	-27.94	42.01	41.02	14.75	51.72
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	10600.00	47.25	74.00	-26.75	46.98	38.84	12.23	50.80	--- --- Peak																																																																																						
2	15900.00	46.11	74.00	-27.89	42.06	41.02	14.75	51.72	--- --- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	10600.00	45.19	74.00	-28.81	44.92	38.84	12.23	50.80	--- --- Peak																																																																																						
2	15900.00	46.06	74.00	-27.94	42.01	41.02	14.75	51.72	--- --- Peak																																																																																						



Mode	15																																																																					
	Band Edge																																																																					
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																					
ANT	8																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	<p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5350.24</td> <td>64.76</td> <td>74.00</td> <td>-9.24</td> <td>52.03</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> <td>100</td> <td>299 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5350.24	64.76	74.00	-9.24	52.03	35.99	9.37	32.63	100	299 PEAK	<p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>106.37</td> <td>74.00</td> <td>32.37</td> <td>93.79</td> <td>36.01</td> <td>9.21</td> <td>32.64</td> <td>100</td> <td>299 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5320.00	106.37	74.00	32.37	93.79	36.01	9.21	32.64	100	299 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 5350.24	64.76	74.00	-9.24	52.03	35.99	9.37	32.63	100	299 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 5320.00	106.37	74.00	32.37	93.79	36.01	9.21	32.64	100	299 PEAK																																																													
Avg	<p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5350.80</td> <td>47.95</td> <td>54.00</td> <td>-6.05</td> <td>35.22</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> <td>100</td> <td>299 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5350.80	47.95	54.00	-6.05	35.22	35.99	9.37	32.63	100	299 AVERAGE	<p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>100.11</td> <td>54.00</td> <td>46.11</td> <td>87.53</td> <td>36.01</td> <td>9.21</td> <td>32.64</td> <td>100</td> <td>299 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5320.00	100.11	54.00	46.11	87.53	36.01	9.21	32.64	100	299 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 5350.80	47.95	54.00	-6.05	35.22	35.99	9.37	32.63	100	299 AVERAGE																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 5320.00	100.11	54.00	46.11	87.53	36.01	9.21	32.64	100	299 AVERAGE																																																													







Mode	15																																																																											
	Band Edge																																																																											
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																											
ANT	8																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.22</td> <td>58.38</td> <td>74.00</td> <td>-15.62</td> <td>45.65</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> <td>374</td> <td>239</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5351.22	58.38	74.00	-15.62	45.65	35.99	9.37	32.63	374	239	PEAK	<p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>101.99</td> <td>-----</td> <td>-----</td> <td>89.41</td> <td>36.01</td> <td>9.21</td> <td>32.64</td> <td>374</td> <td>239</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	101.99	-----	-----	89.41	36.01	9.21	32.64	374	239	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5351.22	58.38	74.00	-15.62	45.65	35.99	9.37	32.63	374	239	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5320.00	101.99	-----	-----	89.41	36.01	9.21	32.64	374	239	PEAK																																																																	
Avg	<p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.10</td> <td>44.58</td> <td>54.00</td> <td>-9.42</td> <td>31.85</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> <td>374</td> <td>239</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.10	44.58	54.00	-9.42	31.85	35.99	9.37	32.63	374	239	AVERAGE	<p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>95.81</td> <td>-----</td> <td>-----</td> <td>83.23</td> <td>36.01</td> <td>9.21</td> <td>32.64</td> <td>374</td> <td>239</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	95.81	-----	-----	83.23	36.01	9.21	32.64	374	239	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5350.10	44.58	54.00	-9.42	31.85	35.99	9.37	32.63	374	239	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5320.00	95.81	-----	-----	83.23	36.01	9.21	32.64	374	239	AVERAGE																																																																	









Mode	15																																																																																														
	Harmonic																																																																																														
	U-NII-2A_5.25-5.35_802.11n_HT20_CH64_5320MHz																																																																																														
ANT	8																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<p>Date: 2024-10-05</p>	<p>Date: 2024-10-05</p>																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>47.06</td> <td>74.00</td> <td>-26.94</td> <td>46.74</td> <td>38.86</td> <td>12.26</td> <td>50.80</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>46.46</td> <td>74.00</td> <td>-27.54</td> <td>42.39</td> <td>41.07</td> <td>14.77</td> <td>51.77</td> <td>--- --- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	10640.00	47.06	74.00	-26.94	46.74	38.86	12.26	50.80	--- --- Peak	2	15960.00	46.46	74.00	-27.54	42.39	41.07	14.77	51.77	--- --- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>45.61</td> <td>74.00</td> <td>-28.39</td> <td>45.29</td> <td>38.86</td> <td>12.26</td> <td>50.80</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>46.20</td> <td>74.00</td> <td>-27.80</td> <td>42.13</td> <td>41.07</td> <td>14.77</td> <td>51.77</td> <td>--- --- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	10640.00	45.61	74.00	-28.39	45.29	38.86	12.26	50.80	--- --- Peak	2	15960.00	46.20	74.00	-27.80	42.13	41.07	14.77	51.77
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	10640.00	47.06	74.00	-26.94	46.74	38.86	12.26	50.80	--- --- Peak																																																																																						
2	15960.00	46.46	74.00	-27.54	42.39	41.07	14.77	51.77	--- --- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	10640.00	45.61	74.00	-28.39	45.29	38.86	12.26	50.80	--- --- Peak																																																																																						
2	15960.00	46.20	74.00	-27.80	42.13	41.07	14.77	51.77	--- --- Peak																																																																																						

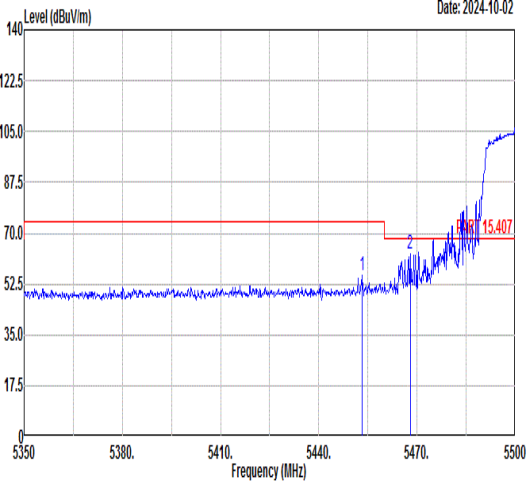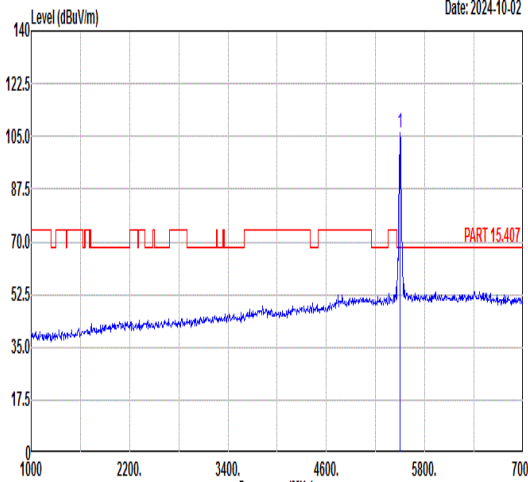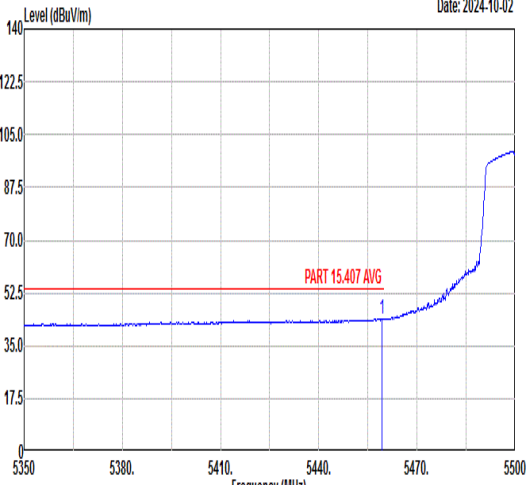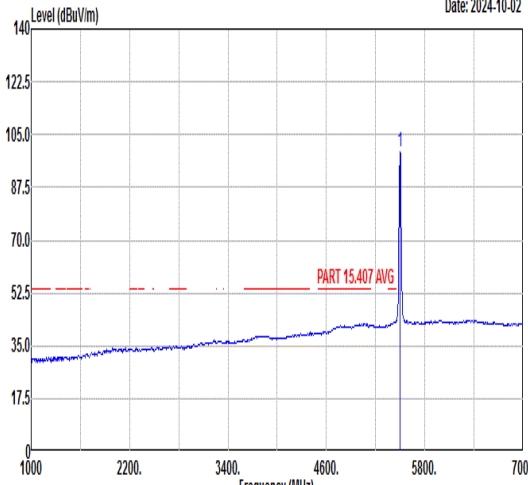

Mode	16																																																																																								
	Band Edge																																																																																								
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																								
ANT	8																																																																																								
Pol.	Horizontal	Fundamental																																																																																							
Peak	 <p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.20</td> <td>55.28</td> <td>74.00</td> <td>-18.72</td> <td>42.28</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> <td>100</td> <td>298 PEAK</td> </tr> <tr> <td>2</td> <td>5467.90</td> <td>62.91</td> <td>68.30</td> <td>-5.39</td> <td>49.91</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>100</td> <td>298 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg	1	5453.20	55.28	74.00	-18.72	42.28	35.93	9.68	32.61	100	298 PEAK	2	5467.90	62.91	68.30	-5.39	49.91	35.92	9.69	32.61	100	298 PEAK	 <p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>106.00</td> <td>-----</td> <td>-----</td> <td>92.99</td> <td>35.90</td> <td>9.71</td> <td>32.60</td> <td>100</td> <td>298 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg	1	5500.00	106.00	-----	-----	92.99	35.90	9.71	32.60	100	298 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg																																																																																	
1	5453.20	55.28	74.00	-18.72	42.28	35.93	9.68	32.61	100	298 PEAK																																																																															
2	5467.90	62.91	68.30	-5.39	49.91	35.92	9.69	32.61	100	298 PEAK																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg																																																																																	
1	5500.00	106.00	-----	-----	92.99	35.90	9.71	32.60	100	298 PEAK																																																																															
Avg	 <p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.20</td> <td>44.03</td> <td>54.00</td> <td>-9.97</td> <td>31.03</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>100</td> <td>298 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg	1	5459.20	44.03	54.00	-9.97	31.03	35.92	9.69	32.61	100	298 AVERAGE	 <p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>99.28</td> <td>-----</td> <td>-----</td> <td>86.27</td> <td>35.90</td> <td>9.71</td> <td>32.60</td> <td>100</td> <td>298 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg	1	5500.00	99.28	-----	-----	86.27	35.90	9.71	32.60	100	298 AVERAGE											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg																																																																																	
1	5459.20	44.03	54.00	-9.97	31.03	35.92	9.69	32.61	100	298 AVERAGE																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg																																																																																	
1	5500.00	99.28	-----	-----	86.27	35.90	9.71	32.60	100	298 AVERAGE																																																																															

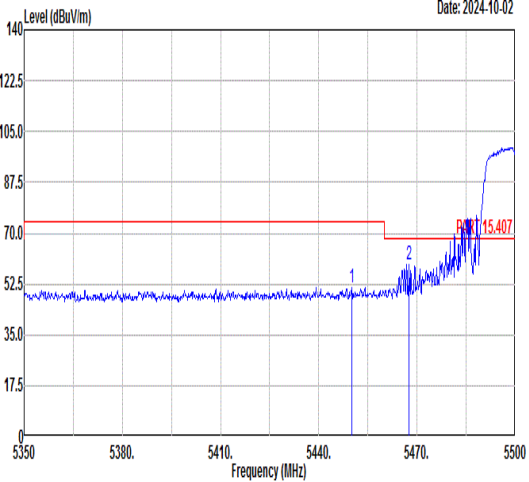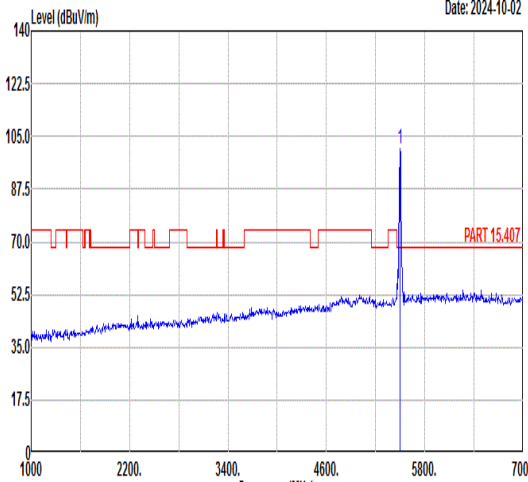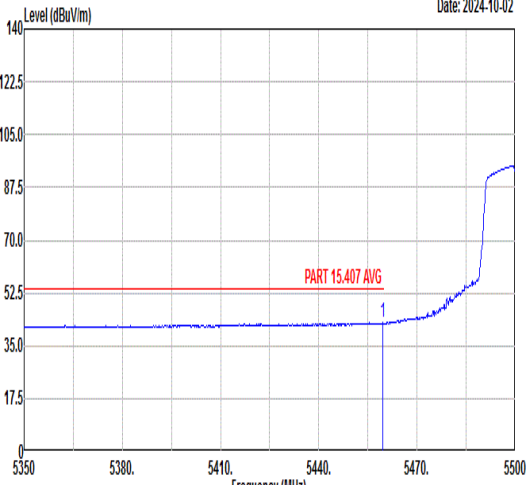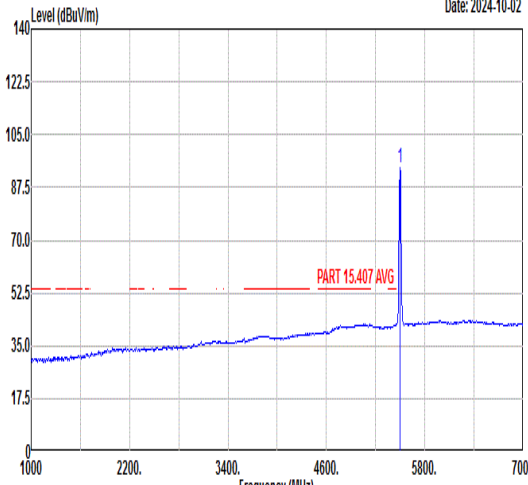

Mode	16																																																																																							
	Band Edge																																																																																							
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																							
ANT	8																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.05</td> <td>51.29</td> <td>74.00</td> <td>-22.71</td> <td>38.29</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> <td>354</td> <td>237</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5467.60</td> <td>59.23</td> <td>68.30</td> <td>-9.07</td> <td>46.23</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>354</td> <td>237</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5450.05	51.29	74.00	-22.71	38.29	35.93	9.68	32.61	354	237	PEAK	2	5467.60	59.23	68.30	-9.07	46.23	35.92	9.69	32.61	354	237	PEAK	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>100.91</td> <td>-----</td> <td>-----</td> <td>87.90</td> <td>35.90</td> <td>9.71</td> <td>32.60</td> <td>354</td> <td>237</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	100.91	-----	-----	87.90	35.90	9.71	32.60	354	237	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5450.05	51.29	74.00	-22.71	38.29	35.93	9.68	32.61	354	237	PEAK																																																																													
2	5467.60	59.23	68.30	-9.07	46.23	35.92	9.69	32.61	354	237	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5500.00	100.91	-----	-----	87.90	35.90	9.71	32.60	354	237	PEAK																																																																													
Avg	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.65</td> <td>42.61</td> <td>54.00</td> <td>-11.39</td> <td>29.61</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>354</td> <td>237</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.65	42.61	54.00	-11.39	29.61	35.92	9.69	32.61	354	237	AVERAGE	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>94.14</td> <td>-----</td> <td>-----</td> <td>81.13</td> <td>35.90</td> <td>9.71</td> <td>32.60</td> <td>354</td> <td>237</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	94.14	-----	-----	81.13	35.90	9.71	32.60	354	237	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5459.65	42.61	54.00	-11.39	29.61	35.92	9.69	32.61	354	237	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5500.00	94.14	-----	-----	81.13	35.90	9.71	32.60	354	237	AVERAGE																																																																													






Mode	16																																																																																														
	Harmonic																																																																																														
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																														
ANT	8																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<p>Date: 2024-10-05</p>	<p>Date: 2024-10-05</p>																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.10</td> <td>74.00</td> <td>-27.90</td> <td>45.38</td> <td>39.00</td> <td>12.52</td> <td>50.80</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>47.32</td> <td>68.30</td> <td>-20.98</td> <td>42.60</td> <td>41.35</td> <td>15.17</td> <td>51.80</td> <td>--- --- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11000.00	46.10	74.00	-27.90	45.38	39.00	12.52	50.80	--- --- Peak	2	16500.00	47.32	68.30	-20.98	42.60	41.35	15.17	51.80	--- --- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>45.00</td> <td>74.00</td> <td>-29.00</td> <td>44.28</td> <td>39.00</td> <td>12.52</td> <td>50.80</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>46.51</td> <td>68.30</td> <td>-21.79</td> <td>41.79</td> <td>41.35</td> <td>15.17</td> <td>51.80</td> <td>--- --- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11000.00	45.00	74.00	-29.00	44.28	39.00	12.52	50.80	--- --- Peak	2	16500.00	46.51	68.30	-21.79	41.79	41.35	15.17	51.80
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	11000.00	46.10	74.00	-27.90	45.38	39.00	12.52	50.80	--- --- Peak																																																																																						
2	16500.00	47.32	68.30	-20.98	42.60	41.35	15.17	51.80	--- --- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	11000.00	45.00	74.00	-29.00	44.28	39.00	12.52	50.80	--- --- Peak																																																																																						
2	16500.00	46.51	68.30	-21.79	41.79	41.35	15.17	51.80	--- --- Peak																																																																																						






Mode	17																																																																																																
	Harmonic																																																																																																
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																
ANT	8																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-10-05</p>	<p>Date: 2024-10-05</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>46.97</td> <td>74.00</td> <td>-27.03</td> <td>46.04</td> <td>39.06</td> <td>12.64</td> <td>50.77</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>2 16740.00</td> <td>47.85</td> <td>68.30</td> <td>-20.45</td> <td>42.78</td> <td>41.47</td> <td>15.35</td> <td>51.75</td> <td>---</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	46.97	74.00	-27.03	46.04	39.06	12.64	50.77	---	--- Peak	2 16740.00	47.85	68.30	-20.45	42.78	41.47	15.35	51.75	---	--- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>47.60</td> <td>74.00</td> <td>-26.40</td> <td>46.67</td> <td>39.06</td> <td>12.64</td> <td>50.77</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>2 16740.00</td> <td>47.17</td> <td>68.30</td> <td>-21.13</td> <td>42.10</td> <td>41.47</td> <td>15.35</td> <td>51.75</td> <td>---</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	47.60	74.00	-26.40	46.67	39.06	12.64	50.77	---	--- Peak	2 16740.00	47.17	68.30	-21.13	42.10	41.47	15.35	51.75	---
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 11160.00	46.97	74.00	-27.03	46.04	39.06	12.64	50.77	---	--- Peak																																																																																								
2 16740.00	47.85	68.30	-20.45	42.78	41.47	15.35	51.75	---	--- Peak																																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 11160.00	47.60	74.00	-26.40	46.67	39.06	12.64	50.77	---	--- Peak																																																																																								
2 16740.00	47.17	68.30	-21.13	42.10	41.47	15.35	51.75	---	--- Peak																																																																																								

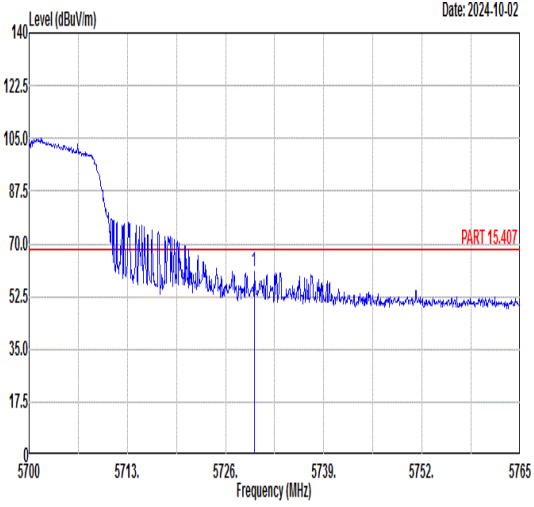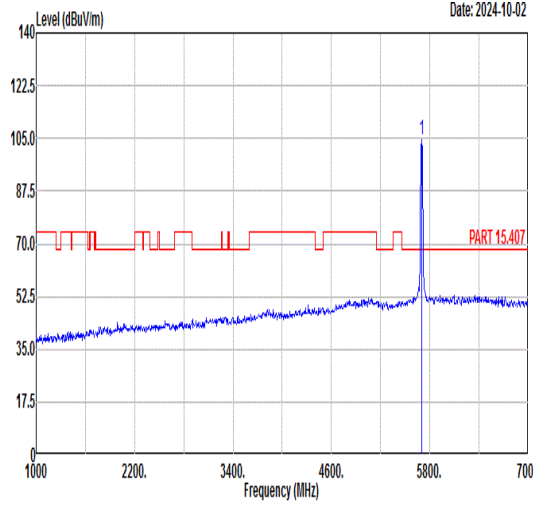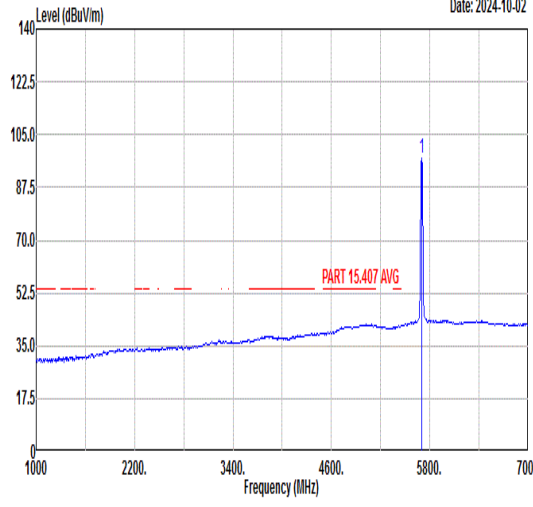

Mode	18																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																									
ANT	8																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5729.77</td> <td>60.79</td> <td>68.30</td> <td>-7.51</td> <td>47.23</td> <td>36.22</td> <td>10.03</td> <td>32.69</td> <td>109</td> <td>294</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5729.77	60.79	68.30	-7.51	47.23	36.22	10.03	32.69	109	294	PEAK	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>104.68</td> <td>-----</td> <td>-----</td> <td>91.21</td> <td>36.18</td> <td>9.97</td> <td>32.68</td> <td>109</td> <td>294</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	104.68	-----	-----	91.21	36.18	9.97	32.68	109	294	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5729.77	60.79	68.30	-7.51	47.23	36.22	10.03	32.69	109	294	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	104.68	-----	-----	91.21	36.18	9.97	32.68	109	294	PEAK																																																															
Avg	Blank	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>97.44</td> <td>-----</td> <td>-----</td> <td>83.97</td> <td>36.18</td> <td>9.97</td> <td>32.68</td> <td>109</td> <td>294</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	97.44	-----	-----	83.97	36.18	9.97	32.68	109	294	AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	97.44	-----	-----	83.97	36.18	9.97	32.68	109	294	AVERAGE																																																															

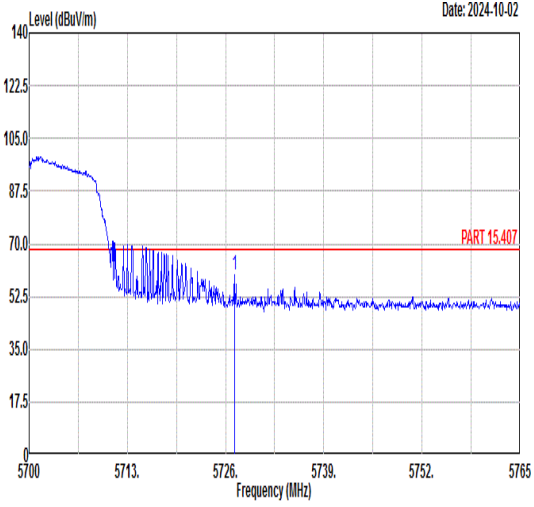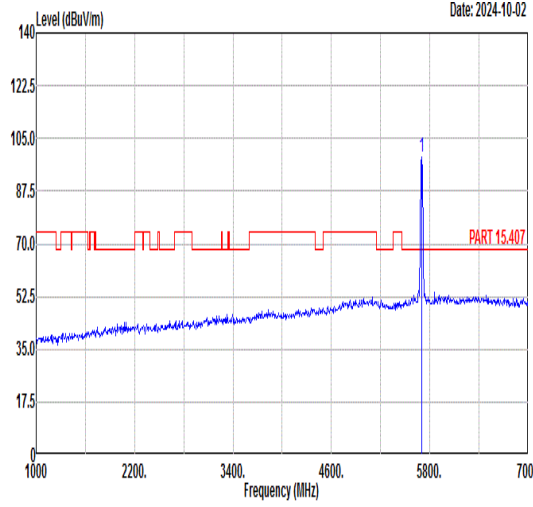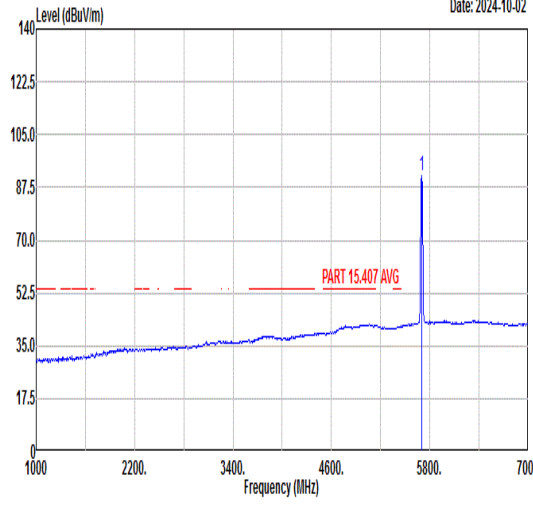

Mode	18																																																																							
	Band Edge																																																																							
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																							
ANT	8																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5727.17</td> <td>59.55</td> <td>68.30</td> <td>-8.75</td> <td>46.00</td> <td>36.22</td> <td>10.02</td> <td>32.69</td> <td>300</td> <td>242</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5727.17	59.55	68.30	-8.75	46.00	36.22	10.02	32.69	300	242	PEAK	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>98.80</td> <td>-----</td> <td>-----</td> <td>85.33</td> <td>36.18</td> <td>9.97</td> <td>32.68</td> <td>300</td> <td>242</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	98.80	-----	-----	85.33	36.18	9.97	32.68	300	242	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq Level	Line	Margin	Level	Factor	Loss Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1 5727.17	59.55	68.30	-8.75	46.00	36.22	10.02	32.69	300	242	PEAK																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq Level	Line	Margin	Level	Factor	Loss Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1 5700.00	98.80	-----	-----	85.33	36.18	9.97	32.68	300	242	PEAK																																																														
Avg	Blank	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>91.30</td> <td>-----</td> <td>-----</td> <td>77.83</td> <td>36.18</td> <td>9.97</td> <td>32.68</td> <td>300</td> <td>242</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	91.30	-----	-----	77.83	36.18	9.97	32.68	300	242	AVERAGE																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq Level	Line	Margin	Level	Factor	Loss Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1 5700.00	91.30	-----	-----	77.83	36.18	9.97	32.68	300	242	AVERAGE																																																														



Mode	18																																																																																																
	Harmonic																																																																																																
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																																
ANT	8																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-10-05</p>	<p>Date: 2024-10-05</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>45.76</td> <td>74.00</td> <td>-28.24</td> <td>44.51</td> <td>39.16</td> <td>12.81</td> <td>50.72</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>48.48</td> <td>68.30</td> <td>-19.82</td> <td>42.95</td> <td>41.71</td> <td>15.62</td> <td>51.80</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	45.76	74.00	-28.24	44.51	39.16	12.81	50.72	--- Peak	2	17100.00	48.48	68.30	-19.82	42.95	41.71	15.62	51.80	--- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>44.51</td> <td>74.00</td> <td>-29.49</td> <td>43.26</td> <td>39.16</td> <td>12.81</td> <td>50.72</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>46.71</td> <td>68.30</td> <td>-21.59</td> <td>41.18</td> <td>41.71</td> <td>15.62</td> <td>51.80</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	44.51	74.00	-29.49	43.26	39.16	12.81	50.72	--- Peak	2	17100.00	46.71	68.30	-21.59	41.18	41.71	15.62	51.80
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	11400.00	45.76	74.00	-28.24	44.51	39.16	12.81	50.72	--- Peak																																																																																								
2	17100.00	48.48	68.30	-19.82	42.95	41.71	15.62	51.80	--- Peak																																																																																								
Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	11400.00	44.51	74.00	-29.49	43.26	39.16	12.81	50.72	--- Peak																																																																																								
2	17100.00	46.71	68.30	-21.59	41.18	41.71	15.62	51.80	--- Peak																																																																																								









	<b>19</b>																																																																									
<b>Mode</b>	<b>Band Edge - L</b>																																																																									
	<b>U-NII-1_5.15-5.25_802.11n_HT40_CH38_5190MHz</b>																																																																									
<b>ANT</b>	<b>8</b>																																																																									
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																								
<b>Peak</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.77</td> <td>63.48</td> <td>74.00</td> <td>-10.52</td> <td>51.51</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>125</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5148.77	63.48	74.00	-10.52	51.51	36.11	8.53	32.67	125	299	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>99.19</td> <td>-----</td> <td>-----</td> <td>87.15</td> <td>36.09</td> <td>8.61</td> <td>32.66</td> <td>125</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5190.00	99.19	-----	-----	87.15	36.09	8.61	32.66	125	299	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5148.77	63.48	74.00	-10.52	51.51	36.11	8.53	32.67	125	299	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5190.00	99.19	-----	-----	87.15	36.09	8.61	32.66	125	299	PEAK																																																															
<b>Avg</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.91</td> <td>48.85</td> <td>54.00</td> <td>-5.15</td> <td>36.87</td> <td>36.11</td> <td>8.54</td> <td>32.67</td> <td>125</td> <td>299</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5149.91	48.85	54.00	-5.15	36.87	36.11	8.54	32.67	125	299	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>92.88</td> <td>-----</td> <td>-----</td> <td>80.84</td> <td>36.09</td> <td>8.61</td> <td>32.66</td> <td>125</td> <td>299</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5190.00	92.88	-----	-----	80.84	36.09	8.61	32.66	125	299	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5149.91	48.85	54.00	-5.15	36.87	36.11	8.54	32.67	125	299	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5190.00	92.88	-----	-----	80.84	36.09	8.61	32.66	125	299	AVERAGE																																																															



Mode	19																																													
	Band Edge - R																																													
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																													
ANT	8																																													
Pol.	Horizontal	Fundamental																																												
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5448.93</td> <td>51.22</td> <td>74.00</td> <td>-22.78</td> <td>38.22</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> <td>125</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5448.93	51.22	74.00	-22.78	38.22	35.93	9.68	32.61	125	299	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	5448.93	51.22	74.00	-22.78	38.22	35.93	9.68	32.61	125	299	PEAK																																			
Avg	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5437.32</td> <td>42.92</td> <td>54.00</td> <td>-11.08</td> <td>29.91</td> <td>35.94</td> <td>9.68</td> <td>32.61</td> <td>125</td> <td>299</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5437.32	42.92	54.00	-11.08	29.91	35.94	9.68	32.61	125	299	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	5437.32	42.92	54.00	-11.08	29.91	35.94	9.68	32.61	125	299	AVERAGE																																			

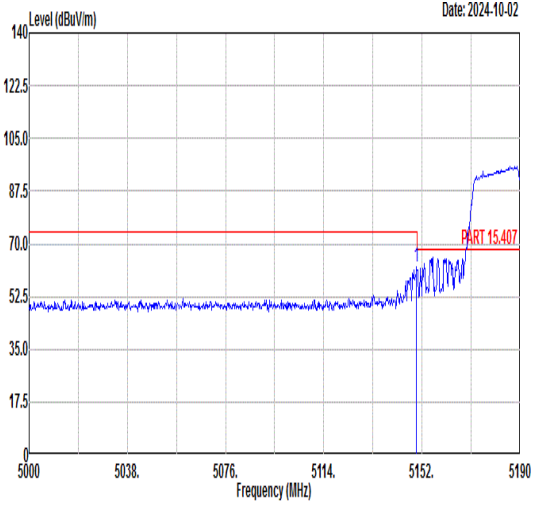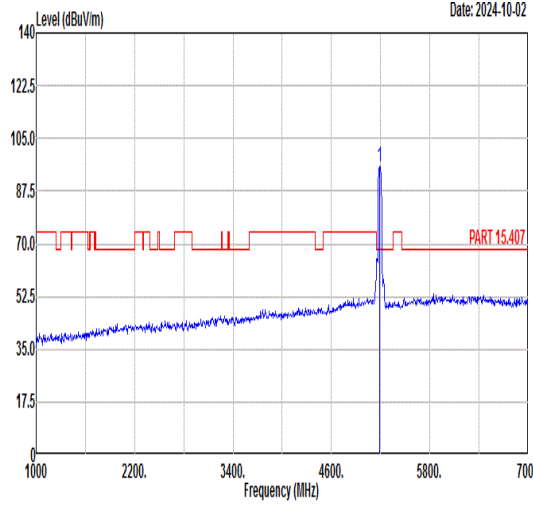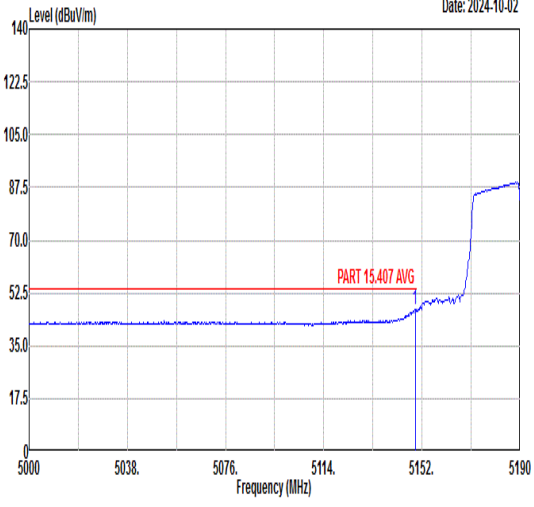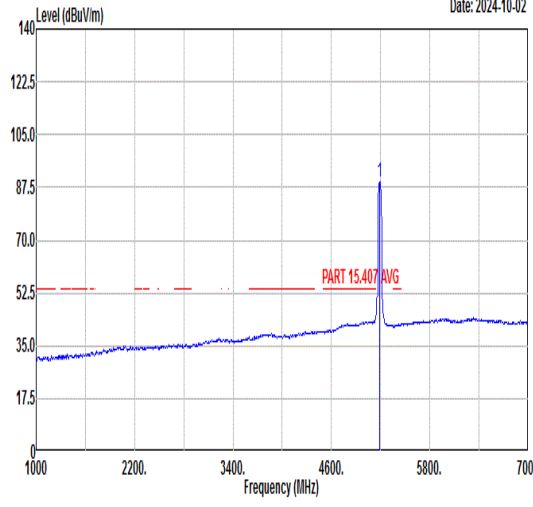

Mode	19																																																																									
	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11n_HT40_CH38_5190MHz																																																																									
ANT	8																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.91</td> <td>62.18</td> <td>74.00</td> <td>-11.82</td> <td>50.20</td> <td>36.11</td> <td>8.54</td> <td>32.67</td> <td>300</td> <td>248</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5149.91	62.18	74.00	-11.82	50.20	36.11	8.54	32.67	300	248	PEAK	 <p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>95.50</td> <td>-----</td> <td>-----</td> <td>83.46</td> <td>36.09</td> <td>8.61</td> <td>32.66</td> <td>300</td> <td>248</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5190.00	95.50	-----	-----	83.46	36.09	8.61	32.66	300	248	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5149.91	62.18	74.00	-11.82	50.20	36.11	8.54	32.67	300	248	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5190.00	95.50	-----	-----	83.46	36.09	8.61	32.66	300	248	PEAK																																																															
Avg	 <p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.34</td> <td>47.08</td> <td>54.00</td> <td>-6.92</td> <td>35.11</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>300</td> <td>248</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5149.34	47.08	54.00	-6.92	35.11	36.11	8.53	32.67	300	248	AVERAGE	 <p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>89.15</td> <td>-----</td> <td>-----</td> <td>77.11</td> <td>36.09</td> <td>8.61</td> <td>32.66</td> <td>300</td> <td>248</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5190.00	89.15	-----	-----	77.11	36.09	8.61	32.66	300	248	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5149.34	47.08	54.00	-6.92	35.11	36.11	8.53	32.67	300	248	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5190.00	89.15	-----	-----	77.11	36.09	8.61	32.66	300	248	AVERAGE																																																															



Mode	19																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																									
ANT	8																																									
Pol.	Vertical	Fundamental																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5458.38</td> <td>51.74</td> <td>74.00</td> <td>-22.26</td> <td>38.74</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>300</td> <td>248 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5458.38	51.74	74.00	-22.26	38.74	35.92	9.69	32.61							300	248 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1 5458.38	51.74	74.00	-22.26	38.74	35.92	9.69	32.61																																			
						300	248 PEAK																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5455.14</td> <td>42.46</td> <td>54.00</td> <td>-11.54</td> <td>29.46</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>300</td> <td>248 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5455.14	42.46	54.00	-11.54	29.46	35.93	9.68	32.61							300	248 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1 5455.14	42.46	54.00	-11.54	29.46	35.93	9.68	32.61																																			
						300	248 AVERAGE																																			



Mode	19																																																																																
	Harmonic																																																																																
	U-NII-1_5.15-5.25_802.11n_HT40_CH38_5190MHz																																																																																
ANT	8																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak Avg	<p>Date: 2024-10-06</p>	<p>Date: 2024-10-06</p>																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>45.99</td> <td>68.30</td> <td>-22.31</td> <td>45.94</td> <td>38.75</td> <td>12.08 50.78 --- --- Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>47.29</td> <td>74.00</td> <td>-26.71</td> <td>43.39</td> <td>40.76</td> <td>14.60 51.46 --- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	10380.00	45.99	68.30	-22.31	45.94	38.75	12.08 50.78 --- --- Peak	2	15570.00	47.29	74.00	-26.71	43.39	40.76	14.60 51.46 --- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>44.65</td> <td>68.30</td> <td>-23.65</td> <td>44.60</td> <td>38.75</td> <td>12.08 50.78 --- --- Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>46.31</td> <td>74.00</td> <td>-27.69</td> <td>42.41</td> <td>40.76</td> <td>14.60 51.46 --- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	10380.00	44.65	68.30	-23.65	44.60	38.75	12.08 50.78 --- --- Peak	2	15570.00	46.31	74.00	-27.69	42.41	40.76
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																										
1	10380.00	45.99	68.30	-22.31	45.94	38.75	12.08 50.78 --- --- Peak																																																																										
2	15570.00	47.29	74.00	-26.71	43.39	40.76	14.60 51.46 --- --- Peak																																																																										
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																										
1	10380.00	44.65	68.30	-23.65	44.60	38.75	12.08 50.78 --- --- Peak																																																																										
2	15570.00	46.31	74.00	-27.69	42.41	40.76	14.60 51.46 --- --- Peak																																																																										







Mode	20																																																																									
	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11n_HT40_CH46_5230MHz																																																																									
ANT	8																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5144.21</td> <td>56.65</td> <td>74.00</td> <td>-17.35</td> <td>44.69</td> <td>36.11</td> <td>8.52</td> <td>32.67</td> <td>119</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5144.21	56.65	74.00	-17.35	44.69	36.11	8.52	32.67	119	296	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>104.06</td> <td>-----</td> <td>-----</td> <td>91.91</td> <td>36.06</td> <td>8.74</td> <td>32.65</td> <td>119</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5230.00	104.06	-----	-----	91.91	36.06	8.74	32.65	119	296	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5144.21	56.65	74.00	-17.35	44.69	36.11	8.52	32.67	119	296	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5230.00	104.06	-----	-----	91.91	36.06	8.74	32.65	119	296	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.97</td> <td>44.82</td> <td>54.00</td> <td>-9.18</td> <td>32.85</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>119</td> <td>296</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5146.97	44.82	54.00	-9.18	32.85	36.11	8.53	32.67	119	296	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>97.32</td> <td>-----</td> <td>-----</td> <td>85.17</td> <td>36.06</td> <td>8.74</td> <td>32.65</td> <td>119</td> <td>296</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5230.00	97.32	-----	-----	85.17	36.06	8.74	32.65	119	296	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5146.97	44.82	54.00	-9.18	32.85	36.11	8.53	32.67	119	296	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5230.00	97.32	-----	-----	85.17	36.06	8.74	32.65	119	296	AVERAGE																																																															



Mode	20																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																					
ANT	8																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5447.12</td> <td>51.76</td> <td>74.00</td> <td>-22.24</td> <td>38.76</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> <td>119</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5447.12	51.76	74.00	-22.24	38.76	35.93	9.68	32.61	119	296	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5447.12	51.76	74.00	-22.24	38.76	35.93	9.68	32.61	119	296	PEAK																											
Avg	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5366.39</td> <td>42.99</td> <td>54.00</td> <td>-11.01</td> <td>30.19</td> <td>35.98</td> <td>9.45</td> <td>32.63</td> <td>119</td> <td>296</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5366.39	42.99	54.00	-11.01	30.19	35.98	9.45	32.63	119	296	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5366.39	42.99	54.00	-11.01	30.19	35.98	9.45	32.63	119	296	AVERAGE																											

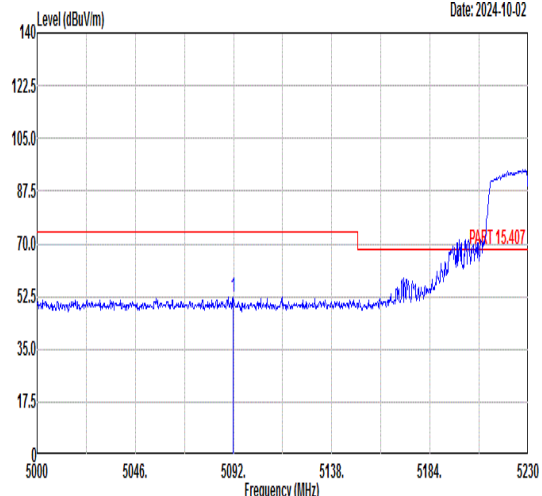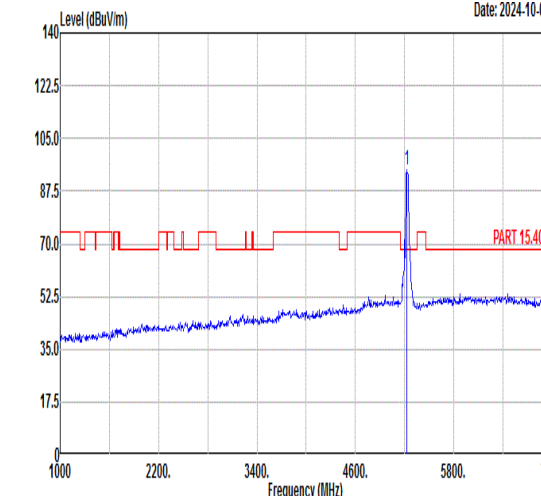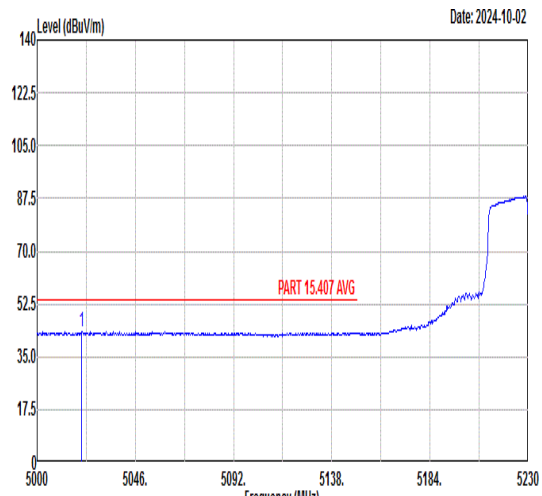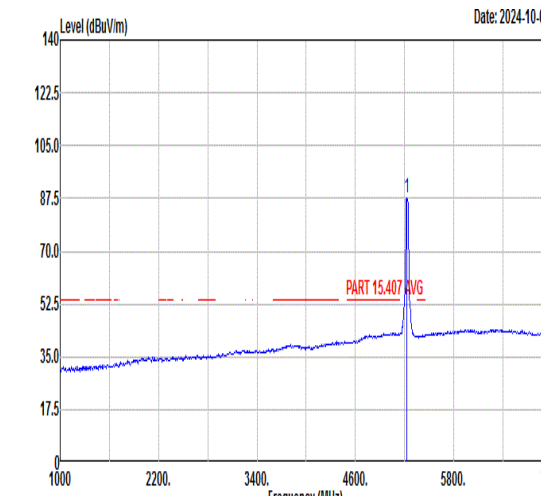

Mode	20																																																													
	Band Edge - L																																																													
	U-NII-1_5.15-5.25_802.11n_HT40_CH46_5230MHz																																																													
ANT	8																																																													
Pol.	Vertical	Fundamental																																																												
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical. Date: 2024-10-02. Peak at 5091.77 MHz.</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5091.77</td> <td>52.55</td> <td>74.00</td> <td>-21.45</td> <td>40.66</td> <td>36.14</td> <td>8.43</td> <td>32.68</td> <td>300</td> <td>227 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5091.77	52.55	74.00	-21.45	40.66	36.14	8.43	32.68	300	227 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental. Date: 2024-10-02. Peak at 5230.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5230.00</td> <td>94.40</td> <td>82.25</td> <td>-----</td> <td>36.06</td> <td>8.74</td> <td>32.65</td> <td>300</td> <td>227</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5230.00	94.40	82.25	-----	36.06	8.74	32.65	300	227	PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1 5091.77	52.55	74.00	-21.45	40.66	36.14	8.43	32.68	300	227 PEAK																																																					
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1 5230.00	94.40	82.25	-----	36.06	8.74	32.65	300	227	PEAK																																																					
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical. Date: 2024-10-02. Average at 5020.93 MHz.</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5020.93</td> <td>43.39</td> <td>54.00</td> <td>-10.61</td> <td>31.60</td> <td>36.19</td> <td>8.30</td> <td>32.70</td> <td>300</td> <td>227 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5020.93	43.39	54.00	-10.61	31.60	36.19	8.30	32.70	300	227 AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental. Date: 2024-10-02. Average at 5230.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5230.00</td> <td>87.85</td> <td>75.70</td> <td>-----</td> <td>36.06</td> <td>8.74</td> <td>32.65</td> <td>300</td> <td>227</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5230.00	87.85	75.70	-----	36.06	8.74	32.65	300	227	AVERAGE
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1 5020.93	43.39	54.00	-10.61	31.60	36.19	8.30	32.70	300	227 AVERAGE																																																					
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1 5230.00	87.85	75.70	-----	36.06	8.74	32.65	300	227	AVERAGE																																																					







Mode	20																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																					
ANT	8																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5365.93</td> <td>51.36</td> <td>74.00</td> <td>-22.64</td> <td>38.56</td> <td>35.98</td> <td>9.45</td> <td>32.63</td> <td>300</td> <td>227</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5365.93	51.36	74.00	-22.64	38.56	35.98	9.45	32.63	300	227	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5365.93	51.36	74.00	-22.64	38.56	35.98	9.45	32.63	300	227	PEAK																											
Avg	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5452.64</td> <td>42.82</td> <td>54.00</td> <td>-11.18</td> <td>29.82</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> <td>300</td> <td>227</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5452.64	42.82	54.00	-11.18	29.82	35.93	9.68	32.61	300	227	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5452.64	42.82	54.00	-11.18	29.82	35.93	9.68	32.61	300	227	AVERAGE																											







Mode	21																																																																											
	Band Edge - L																																																																											
	U-NII-2A_5.25-5.35_802.11n_HT40_CH54_5270MHz																																																																											
ANT	8																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5001.89</td> <td>52.42</td> <td>74.00</td> <td>-21.58</td> <td>40.58</td> <td>36.20</td> <td>8.34</td> <td>32.70</td> <td>100</td> <td>298</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5001.89	52.42	74.00	-21.58	40.58	36.20	8.34	32.70	100	298	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>104.66</td> <td>-----</td> <td>-----</td> <td>92.32</td> <td>36.04</td> <td>8.95</td> <td>32.65</td> <td>100</td> <td>298</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	104.66	-----	-----	92.32	36.04	8.95	32.65	100	298	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5001.89	52.42	74.00	-21.58	40.58	36.20	8.34	32.70	100	298	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5270.00	104.66	-----	-----	92.32	36.04	8.95	32.65	100	298	PEAK																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.42</td> <td>43.69</td> <td>54.00</td> <td>-10.31</td> <td>31.72</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>100</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.42	43.69	54.00	-10.31	31.72	36.11	8.53	32.67	100	298	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>97.30</td> <td>-----</td> <td>-----</td> <td>84.96</td> <td>36.04</td> <td>8.95</td> <td>32.65</td> <td>100</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	97.30	-----	-----	84.96	36.04	8.95	32.65	100	298	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5147.42	43.69	54.00	-10.31	31.72	36.11	8.53	32.67	100	298	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5270.00	97.30	-----	-----	84.96	36.04	8.95	32.65	100	298	AVERAGE																																																																	

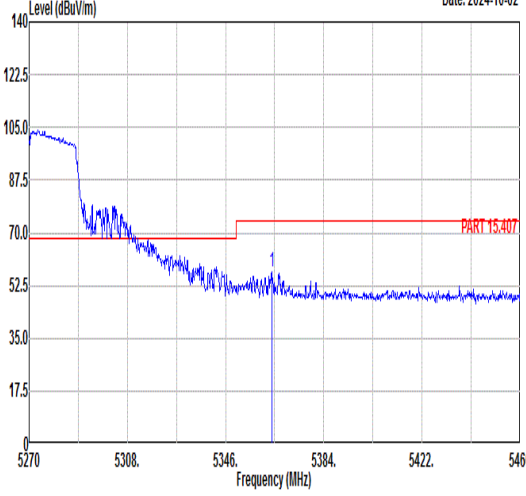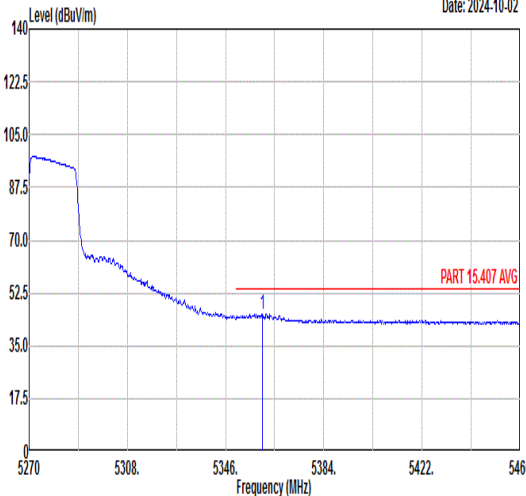

	<b>21</b>																																													
Mode	<b>Band Edge - R</b>																																													
ANT	<b>8</b>																																													
Pol.	<b>Horizontal</b>	<b>Fundamental</b>																																												
Peak	<p style="text-align: right;">Date: 2024-10-02</p>  <table border="1" data-bbox="263 1153 734 1276"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5364.05</td> <td>56.95</td> <td>74.00</td> <td>-17.05</td> <td>44.16</td> <td>35.98</td> <td>9.44</td> <td>32.63</td> <td>100</td> <td>298</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5364.05	56.95	74.00	-17.05	44.16	35.98	9.44	32.63	100	298	PEAK	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	5364.05	56.95	74.00	-17.05	44.16	35.98	9.44	32.63	100	298	PEAK																																			
Avg	<p style="text-align: right;">Date: 2024-10-02</p>  <table border="1" data-bbox="263 1825 734 1948"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5360.25</td> <td>45.57</td> <td>54.00</td> <td>-8.43</td> <td>32.80</td> <td>35.98</td> <td>9.42</td> <td>32.63</td> <td>100</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5360.25	45.57	54.00	-8.43	32.80	35.98	9.42	32.63	100	298	AVERAGE	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	5360.25	45.57	54.00	-8.43	32.80	35.98	9.42	32.63	100	298	AVERAGE																																			

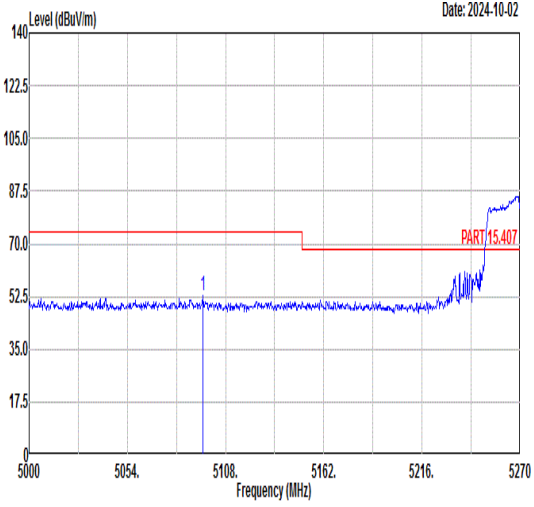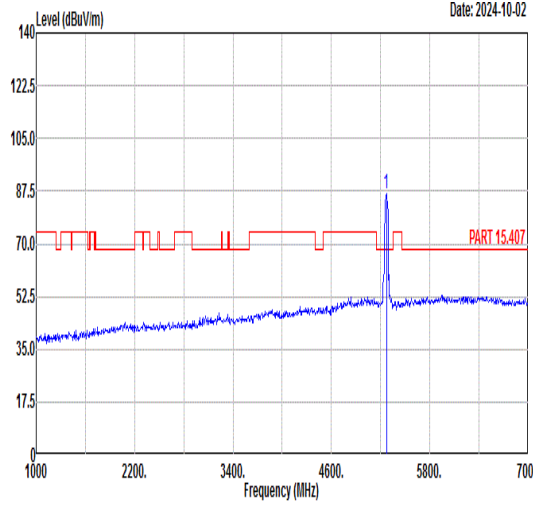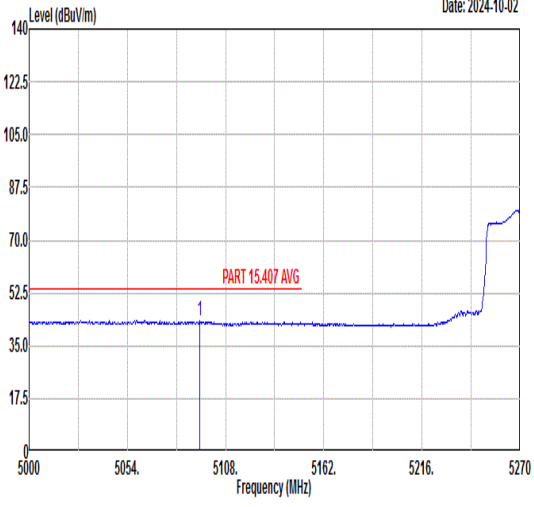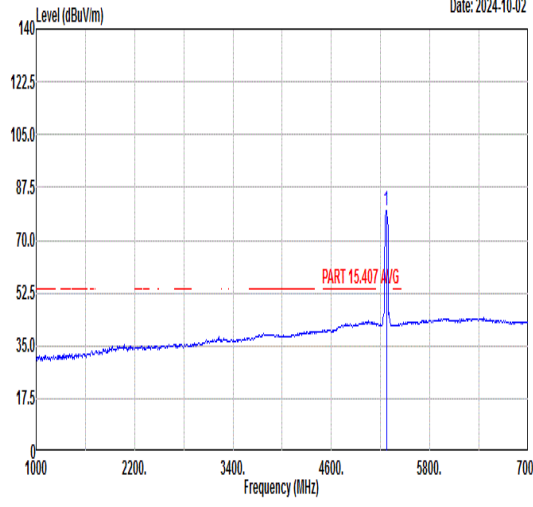

	21																																																													
Mode	Band Edge - L																																																													
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																													
ANT	8																																																													
Pol.	Vertical	Fundamental																																																												
Peak	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5095.58</td> <td>52.62</td> <td>74.00</td> <td>-21.38</td> <td>40.72</td> <td>36.14</td> <td>8.44</td> <td>32.68</td> <td>300</td> <td>177 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5095.58	52.62	74.00	-21.38	40.72	36.14	8.44	32.68	300	177 PEAK	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5270.00</td> <td>86.51</td> <td>-----</td> <td>-----</td> <td>74.17</td> <td>36.04</td> <td>8.95</td> <td>32.65</td> <td>300</td> <td>177 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5270.00	86.51	-----	-----	74.17	36.04	8.95	32.65	300	177 PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1 5095.58	52.62	74.00	-21.38	40.72	36.14	8.44	32.68	300	177 PEAK																																																					
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1 5270.00	86.51	-----	-----	74.17	36.04	8.95	32.65	300	177 PEAK																																																					
Avg	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5093.69</td> <td>43.31</td> <td>54.00</td> <td>-10.69</td> <td>31.42</td> <td>36.14</td> <td>8.43</td> <td>32.68</td> <td>300</td> <td>177 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5093.69	43.31	54.00	-10.69	31.42	36.14	8.43	32.68	300	177 AVERAGE	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5270.00</td> <td>79.98</td> <td>-----</td> <td>-----</td> <td>67.64</td> <td>36.04</td> <td>8.95</td> <td>32.65</td> <td>300</td> <td>177 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5270.00	79.98	-----	-----	67.64	36.04	8.95	32.65	300	177 AVERAGE
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1 5093.69	43.31	54.00	-10.69	31.42	36.14	8.43	32.68	300	177 AVERAGE																																																					
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1 5270.00	79.98	-----	-----	67.64	36.04	8.95	32.65	300	177 AVERAGE																																																					



Mode	21																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																					
ANT	8																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5411.74</td> <td>51.04</td> <td>74.00</td> <td>-22.96</td> <td>38.05</td> <td>35.95</td> <td>9.66</td> <td>32.62</td> <td>300</td> <td>177</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5411.74	51.04	74.00	-22.96	38.05	35.95	9.66	32.62	300	177	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5411.74	51.04	74.00	-22.96	38.05	35.95	9.66	32.62	300	177	PEAK																											
Avg	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5444.80</td> <td>42.53</td> <td>54.00</td> <td>-11.47</td> <td>29.53</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> <td>300</td> <td>177</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5444.80	42.53	54.00	-11.47	29.53	35.93	9.68	32.61	300	177	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5444.80	42.53	54.00	-11.47	29.53	35.93	9.68	32.61	300	177	AVERAGE																											







Mode	22																																																																																	
	Band Edge - L																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																	
ANT	8																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5072.85</td> <td>52.55</td> <td>74.00</td> <td>-21.45</td> <td>40.69</td> <td>36.16</td> <td>8.39</td> <td>32.69</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>117 295 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5072.85	52.55	74.00	-21.45	40.69	36.16	8.39	32.69								117 295 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5310.00</td> <td>101.53</td> <td>-----</td> <td>-----</td> <td>89.00</td> <td>36.01</td> <td>9.16</td> <td>32.64</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>117 295 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5310.00	101.53	-----	-----	89.00	36.01	9.16	32.64								117 295 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 5072.85	52.55	74.00	-21.45	40.69	36.16	8.39	32.69																																																																											
							117 295 PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 5310.00	101.53	-----	-----	89.00	36.01	9.16	32.64																																																																											
							117 295 PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5128.65</td> <td>43.58</td> <td>54.00</td> <td>-10.42</td> <td>31.63</td> <td>36.12</td> <td>8.50</td> <td>32.67</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>117 295 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5128.65	43.58	54.00	-10.42	31.63	36.12	8.50	32.67								117 295 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5310.00</td> <td>94.30</td> <td>-----</td> <td>-----</td> <td>81.77</td> <td>36.01</td> <td>9.16</td> <td>32.64</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>117 295 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5310.00	94.30	-----	-----	81.77	36.01	9.16	32.64								117 295 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 5128.65	43.58	54.00	-10.42	31.63	36.12	8.50	32.67																																																																											
							117 295 AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 5310.00	94.30	-----	-----	81.77	36.01	9.16	32.64																																																																											
							117 295 AVERAGE																																																																											



Mode	22																																													
	Band Edge - R																																													
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																													
ANT	8																																													
Pol.	Horizontal	Fundamental																																												
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.50</td> <td>59.27</td> <td>74.00</td> <td>-14.73</td> <td>46.53</td> <td>35.99</td> <td>9.38</td> <td>32.63</td> <td>117</td> <td>295</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5353.50	59.27	74.00	-14.73	46.53	35.99	9.38	32.63	117	295	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	5353.50	59.27	74.00	-14.73	46.53	35.99	9.38	32.63	117	295	PEAK																																			
Avg	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.05</td> <td>47.94</td> <td>54.00</td> <td>-6.06</td> <td>35.21</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> <td>117</td> <td>295</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5350.05	47.94	54.00	-6.06	35.21	35.99	9.37	32.63	117	295	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	5350.05	47.94	54.00	-6.06	35.21	35.99	9.37	32.63	117	295	AVERAGE																																			

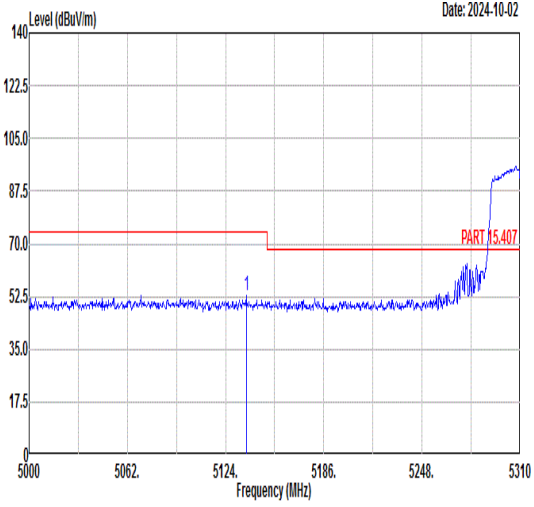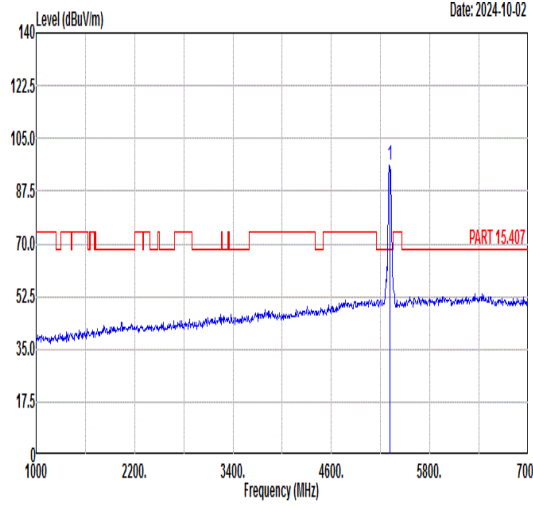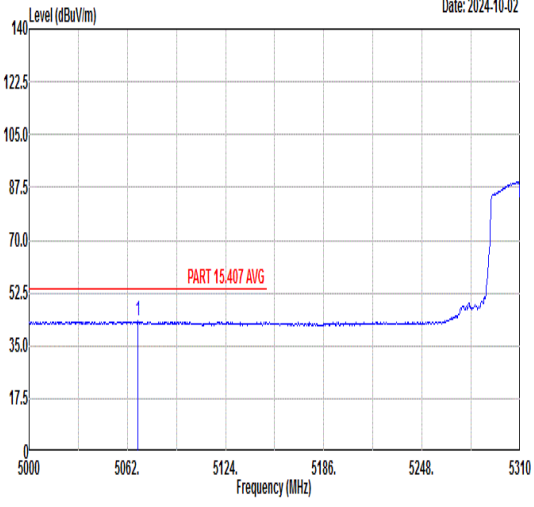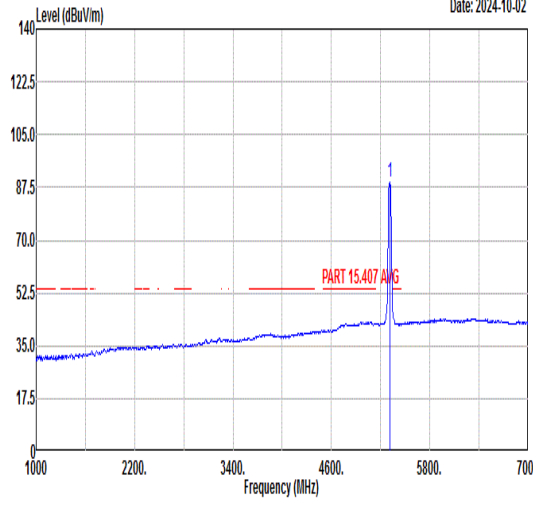





Mode	22																																																													
	Band Edge - L																																																													
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																													
ANT	8																																																													
Pol.	Vertical	Fundamental																																																												
Peak	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5137.02</td> <td>52.95</td> <td>74.00</td> <td>-21.05</td> <td>40.99</td> <td>36.12</td> <td>8.51</td> <td>32.67</td> <td>327</td> <td>241 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5137.02	52.95	74.00	-21.05	40.99	36.12	8.51	32.67	327	241 PEAK	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5310.00</td> <td>96.14</td> <td>-----</td> <td>-----</td> <td>83.61</td> <td>36.01</td> <td>9.16</td> <td>32.64</td> <td>327</td> <td>241 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	96.14	-----	-----	83.61	36.01	9.16	32.64	327	241 PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1 5137.02	52.95	74.00	-21.05	40.99	36.12	8.51	32.67	327	241 PEAK																																																					
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1 5310.00	96.14	-----	-----	83.61	36.01	9.16	32.64	327	241 PEAK																																																					
Avg	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5068.51</td> <td>43.08</td> <td>54.00</td> <td>-10.92</td> <td>31.22</td> <td>36.16</td> <td>8.39</td> <td>32.69</td> <td>327</td> <td>241 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5068.51	43.08	54.00	-10.92	31.22	36.16	8.39	32.69	327	241 AVERAGE	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5310.00</td> <td>89.20</td> <td>-----</td> <td>-----</td> <td>76.67</td> <td>36.01</td> <td>9.16</td> <td>32.64</td> <td>327</td> <td>241 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	89.20	-----	-----	76.67	36.01	9.16	32.64	327	241 AVERAGE
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1 5068.51	43.08	54.00	-10.92	31.22	36.16	8.39	32.69	327	241 AVERAGE																																																					
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1 5310.00	89.20	-----	-----	76.67	36.01	9.16	32.64	327	241 AVERAGE																																																					





Mode	22																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																					
ANT	8																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.05</td> <td>56.31</td> <td>74.00</td> <td>-17.69</td> <td>43.58</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> <td>327</td> <td>241</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5350.05	56.31	74.00	-17.69	43.58	35.99	9.37	32.63	327	241	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5350.05	56.31	74.00	-17.69	43.58	35.99	9.37	32.63	327	241	PEAK																											
Blank																																						
Avg	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.80</td> <td>45.27</td> <td>54.00</td> <td>-8.73</td> <td>32.53</td> <td>35.99</td> <td>9.38</td> <td>32.63</td> <td>327</td> <td>241</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5353.80	45.27	54.00	-8.73	32.53	35.99	9.38	32.63	327	241	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5353.80	45.27	54.00	-8.73	32.53	35.99	9.38	32.63	327	241	AVERAGE																											
Blank																																						

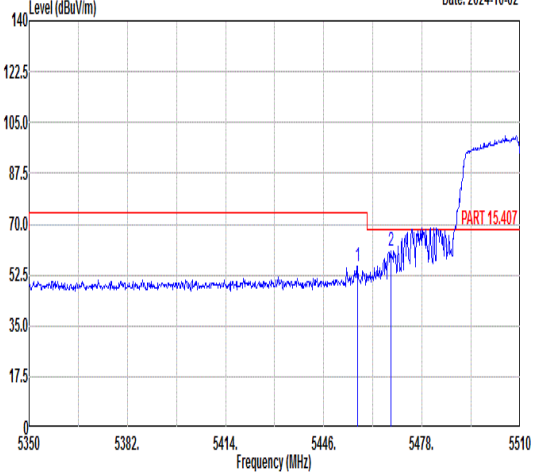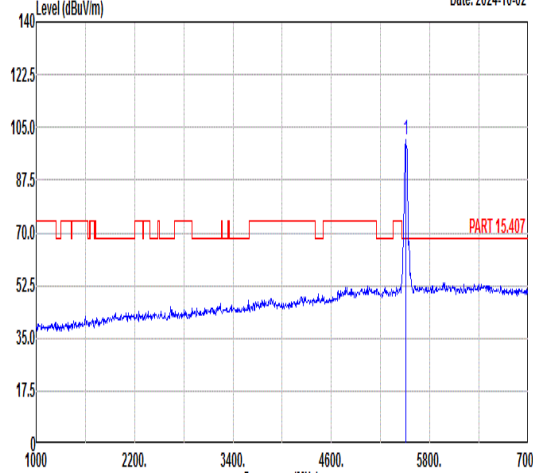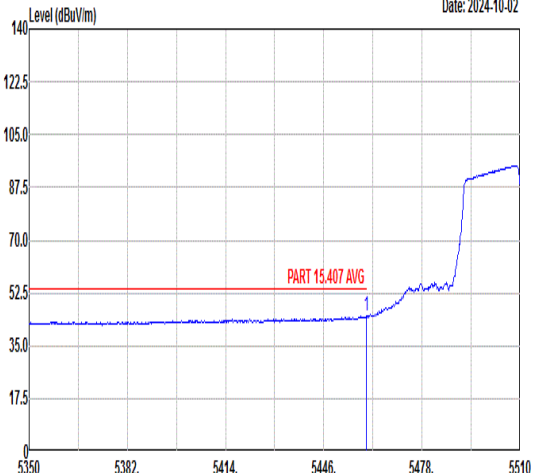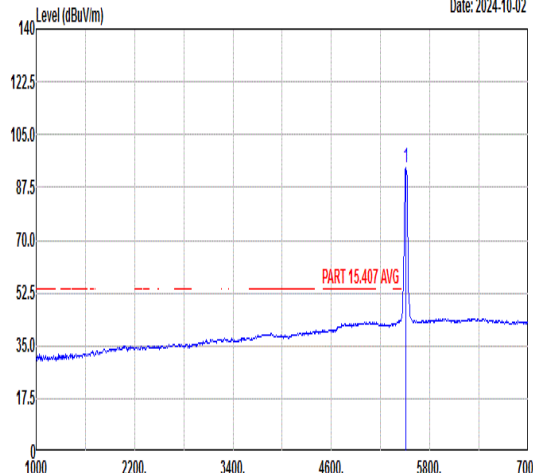

	<b>23</b>																																																																														
<b>Mode</b>	<b>Band Edge - L</b>																																																																														
	<b>U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz</b>																																																																														
<b>ANT</b>	<b>8</b>																																																																														
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																													
<b>Peak</b>	<p style="text-align: right;">Date: 2024-10-02</p>  <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5457.04</td> <td>55.45</td> <td>74.00</td> <td>-18.55</td> <td>42.44</td> <td>35.93</td> <td>9.69</td> <td>32.61</td> <td>100</td> <td>297</td> <td>PEAK</td> </tr> <tr> <td>2 5467.76</td> <td>60.70</td> <td>68.30</td> <td>-7.60</td> <td>47.70</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>100</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5457.04	55.45	74.00	-18.55	42.44	35.93	9.69	32.61	100	297	PEAK	2 5467.76	60.70	68.30	-7.60	47.70	35.92	9.69	32.61	100	297	PEAK	<p style="text-align: right;">Date: 2024-10-02</p>  <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5510.00</td> <td>100.84</td> <td>-----</td> <td>-----</td> <td>87.82</td> <td>35.91</td> <td>9.71</td> <td>32.60</td> <td>100</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5510.00	100.84	-----	-----	87.82	35.91	9.71	32.60	100	297	PEAK
Limit Freq	Level	Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5457.04	55.45	74.00	-18.55	42.44	35.93	9.69	32.61	100	297	PEAK																																																																					
2 5467.76	60.70	68.30	-7.60	47.70	35.92	9.69	32.61	100	297	PEAK																																																																					
Limit Freq	Level	Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5510.00	100.84	-----	-----	87.82	35.91	9.71	32.60	100	297	PEAK																																																																					
<b>Avg</b>	<p style="text-align: right;">Date: 2024-10-02</p>  <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.76</td> <td>44.78</td> <td>54.00</td> <td>-9.22</td> <td>31.78</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>100</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5459.76	44.78	54.00	-9.22	31.78	35.92	9.69	32.61	100	297	AVERAGE	<p style="text-align: right;">Date: 2024-10-02</p>  <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5510.00</td> <td>94.16</td> <td>-----</td> <td>-----</td> <td>81.14</td> <td>35.91</td> <td>9.71</td> <td>32.60</td> <td>100</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5510.00	94.16	-----	-----	81.14	35.91	9.71	32.60	100	297	AVERAGE											
Limit Freq	Level	Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5459.76	44.78	54.00	-9.22	31.78	35.92	9.69	32.61	100	297	AVERAGE																																																																					
Limit Freq	Level	Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5510.00	94.16	-----	-----	81.14	35.91	9.71	32.60	100	297	AVERAGE																																																																					



Mode	23																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																					
ANT	8																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5737.46</td> <td>52.83</td> <td>68.30</td> <td>-15.47</td> <td>39.25</td> <td>36.23</td> <td>10.04</td> <td>32.69</td> <td>100</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5737.46	52.83	68.30	-15.47	39.25	36.23	10.04	32.69	100	297	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5737.46	52.83	68.30	-15.47	39.25	36.23	10.04	32.69	100	297	PEAK																											



Mode	23																																																																																					
	Band Edge - L																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																					
ANT	8																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.16</td> <td>52.26</td> <td>74.00</td> <td>-21.74</td> <td>39.25</td> <td>35.93</td> <td>9.69</td> <td>32.61</td> <td>324</td> <td>241</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.72</td> <td>56.85</td> <td>68.30</td> <td>-11.45</td> <td>43.85</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>324</td> <td>241</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5458.16	52.26	74.00	-21.74	39.25	35.93	9.69	32.61	324	241	PEAK	2	5468.72	56.85	68.30	-11.45	43.85	35.92	9.69	32.61	324	241	PEAK	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>96.60</td> <td>-----</td> <td>-----</td> <td>83.58</td> <td>35.91</td> <td>9.71</td> <td>32.60</td> <td>324</td> <td>241</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5510.00	96.60	-----	-----	83.58	35.91	9.71	32.60	324	241	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5458.16	52.26	74.00	-21.74	39.25	35.93	9.69	32.61	324	241	PEAK																																																																											
2	5468.72	56.85	68.30	-11.45	43.85	35.92	9.69	32.61	324	241	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5510.00	96.60	-----	-----	83.58	35.91	9.71	32.60	324	241	PEAK																																																																											
Avg	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.76</td> <td>43.67</td> <td>54.00</td> <td>-10.33</td> <td>30.67</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>324</td> <td>241</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5459.76	43.67	54.00	-10.33	30.67	35.92	9.69	32.61	324	241	AVERAGE	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>90.85</td> <td>-----</td> <td>-----</td> <td>77.83</td> <td>35.91</td> <td>9.71</td> <td>32.60</td> <td>324</td> <td>241</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5510.00	90.85	-----	-----	77.83	35.91	9.71	32.60	324	241	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5459.76	43.67	54.00	-10.33	30.67	35.92	9.69	32.61	324	241	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5510.00	90.85	-----	-----	77.83	35.91	9.71	32.60	324	241	AVERAGE																																																																											



Mode	23																																
	Band Edge - R																																
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																
ANT	8																																
Pol.	Vertical	Fundamental																															
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5750.72</td> <td>51.84</td> <td>68.30</td> <td>-16.46</td> <td>38.22</td> <td>36.25</td> <td>10.07</td> <td>32.70</td> <td>324</td> <td>241</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark	1	5750.72	51.84	68.30	-16.46	38.22	36.25	10.07	32.70	324	241	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark																						
1	5750.72	51.84	68.30	-16.46	38.22	36.25	10.07	32.70	324	241	PEAK																						







Mode	24																																																																																											
	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																											
ANT	8																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5412.08</td> <td>52.29</td> <td>74.00</td> <td>-21.71</td> <td>39.30</td> <td>35.95</td> <td>9.66</td> <td>32.62</td> <td>125</td> <td>295</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5465.20</td> <td>50.86</td> <td>68.30</td> <td>-17.44</td> <td>37.86</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>125</td> <td>295</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	cm	deg	1	5412.08	52.29	74.00	-21.71	39.30	35.95	9.66	32.62	125	295	PEAK	2	5465.20	50.86	68.30	-17.44	37.86	35.92	9.69	32.61	125	295	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>103.61</td> <td>-----</td> <td>-----</td> <td>90.23</td> <td>36.14</td> <td>9.91</td> <td>32.67</td> <td>125</td> <td>295</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	cm	deg	1	5670.00	103.61	-----	-----	90.23	36.14	9.91	32.67	125	295	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	cm	deg																																																																																				
1	5412.08	52.29	74.00	-21.71	39.30	35.95	9.66	32.62	125	295	PEAK																																																																																	
2	5465.20	50.86	68.30	-17.44	37.86	35.92	9.69	32.61	125	295	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	cm	deg																																																																																				
1	5670.00	103.61	-----	-----	90.23	36.14	9.91	32.67	125	295	PEAK																																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5412.72</td> <td>43.02</td> <td>54.00</td> <td>-10.98</td> <td>30.03</td> <td>35.95</td> <td>9.66</td> <td>32.62</td> <td>125</td> <td>295</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	cm	deg	1	5412.72	43.02	54.00	-10.98	30.03	35.95	9.66	32.62	125	295	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>96.33</td> <td>-----</td> <td>-----</td> <td>82.95</td> <td>36.14</td> <td>9.91</td> <td>32.67</td> <td>125</td> <td>295</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	cm	deg	1	5670.00	96.33	-----	-----	82.95	36.14	9.91	32.67	125	295	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	cm	deg																																																																																				
1	5412.72	43.02	54.00	-10.98	30.03	35.95	9.66	32.62	125	295	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	cm	deg																																																																																				
1	5670.00	96.33	-----	-----	82.95	36.14	9.91	32.67	125	295	AVERAGE																																																																																	



Mode	24																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																								
ANT	8																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5730.14</td> <td>62.69</td> <td>68.30</td> <td>-5.61</td> <td>49.13</td> <td>36.22</td> <td>10.03</td> <td>32.69</td> <td>125</td> <td>295</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5730.14	62.69	68.30	-5.61	49.13	36.22	10.03	32.69	125	295	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Level	Factor	Loss Factor			Remark																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5730.14	62.69	68.30	-5.61	49.13	36.22	10.03	32.69	125	295	PEAK																														

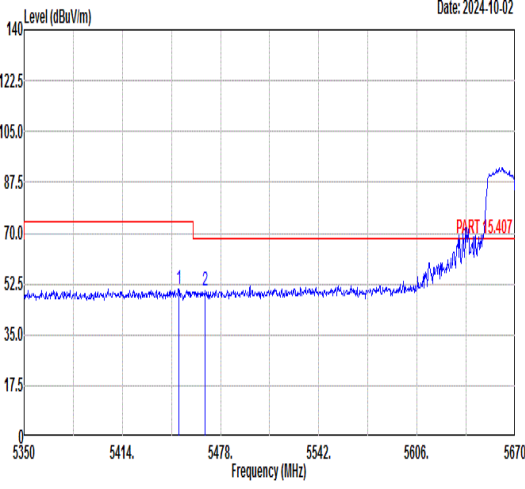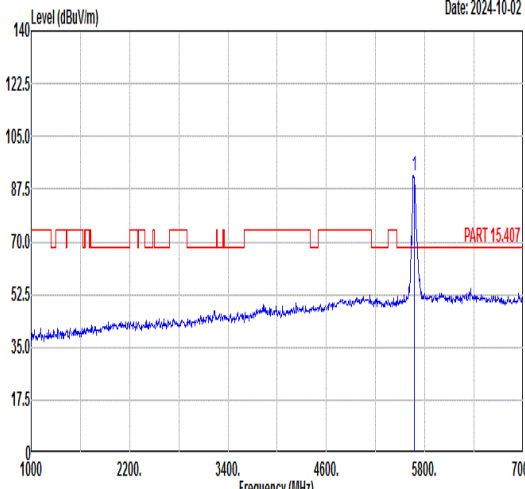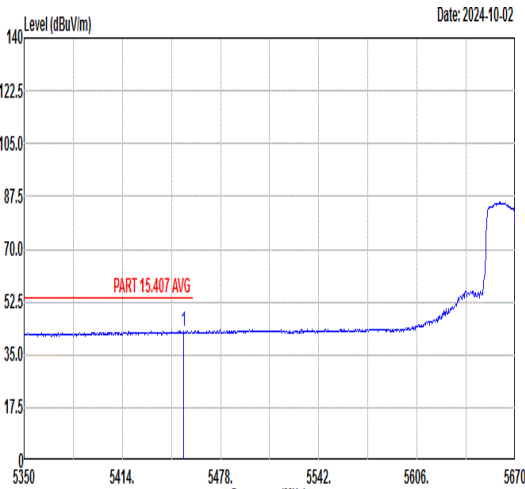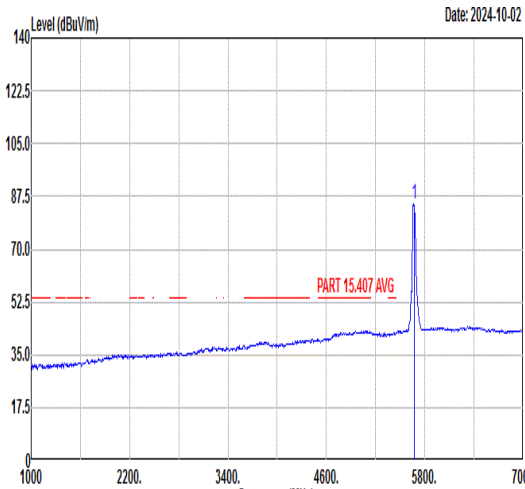

Mode	24																																																																																										
	Band Edge - L																																																																																										
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																										
ANT	8																																																																																										
Pol.	Vertical	Fundamental																																																																																									
Peak	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.80</td> <td>50.62</td> <td>74.00</td> <td>-23.38</td> <td>37.62</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> <td>398</td> <td>207 PEAK</td> </tr> <tr> <td>2</td> <td>5468.08</td> <td>50.04</td> <td>68.30</td> <td>-18.26</td> <td>37.04</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>398</td> <td>207 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5450.80	50.62	74.00	-23.38	37.62	35.93	9.68	32.61	398	207 PEAK	2	5468.08	50.04	68.30	-18.26	37.04	35.92	9.69	32.61	398	207 PEAK	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>92.19</td> <td>-----</td> <td>-----</td> <td>78.86</td> <td>36.12</td> <td>9.87</td> <td>32.66</td> <td>398</td> <td>207 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	92.19	-----	-----	78.86	36.12	9.87	32.66	398	207 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5450.80	50.62	74.00	-23.38	37.62	35.93	9.68	32.61	398	207 PEAK																																																																																	
2	5468.08	50.04	68.30	-18.26	37.04	35.92	9.69	32.61	398	207 PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5670.00	92.19	-----	-----	78.86	36.12	9.87	32.66	398	207 PEAK																																																																																	
Avg	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.00</td> <td>42.89</td> <td>54.00</td> <td>-11.11</td> <td>29.89</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> <td>398</td> <td>207 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.00	42.89	54.00	-11.11	29.89	35.93	9.68	32.61	398	207 AVERAGE	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>85.01</td> <td>-----</td> <td>-----</td> <td>71.65</td> <td>36.13</td> <td>9.89</td> <td>32.66</td> <td>398</td> <td>207 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	85.01	-----	-----	71.65	36.13	9.89	32.66	398	207 AVERAGE											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5454.00	42.89	54.00	-11.11	29.89	35.93	9.68	32.61	398	207 AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5670.00	85.01	-----	-----	71.65	36.13	9.89	32.66	398	207 AVERAGE																																																																																	





Mode	24																																						
	Band Edge - R																																						
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																						
ANT	8																																						
Pol.	Vertical	Fundamental																																					
Peak	<p style="text-align: right;">Date: 2024-10-02</p> <p style="text-align: right; color: red;">PART 15.407</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5730.14</td> <td>59.29</td> <td>68.30</td> <td>-9.01</td> <td>45.73</td> <td>36.22</td> <td>10.03</td> <td>32.69</td> <td>398</td> <td>207 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5730.14	59.29	68.30	-9.01	45.73	36.22	10.03	32.69	398	207 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																
Freq	Level	Line	Level	Factor	Loss Factor			Remark																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																															
1 5730.14	59.29	68.30	-9.01	45.73	36.22	10.03	32.69	398	207 PEAK																														







Mode	25																																																																															
	Band Edge - L																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																															
ANT	8																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.79</td> <td>54.66</td> <td>74.00</td> <td>-19.34</td> <td>42.69</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>100</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5146.79	54.66	74.00	-19.34	42.69	36.11	8.53	32.67	100	297	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>96.15</td> <td>-----</td> <td>-----</td> <td>84.06</td> <td>36.07</td> <td>8.68</td> <td>32.66</td> <td>100</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	96.15	-----	-----	84.06	36.07	8.68	32.66	100	297	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5146.79	54.66	74.00	-19.34	42.69	36.11	8.53	32.67	100	297	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5210.00	96.15	-----	-----	84.06	36.07	8.68	32.66	100	297	PEAK																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.89</td> <td>47.27</td> <td>54.00</td> <td>-6.73</td> <td>35.30</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>100</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5148.89	47.27	54.00	-6.73	35.30	36.11	8.53	32.67	100	297	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>89.35</td> <td>-----</td> <td>-----</td> <td>77.29</td> <td>36.08</td> <td>8.64</td> <td>32.66</td> <td>100</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	89.35	-----	-----	77.29	36.08	8.64	32.66	100	297	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5148.89	47.27	54.00	-6.73	35.30	36.11	8.53	32.67	100	297	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5210.00	89.35	-----	-----	77.29	36.08	8.64	32.66	100	297	AVERAGE																																																																					



Mode	25																																								
	Band Edge - R																																								
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																								
ANT	8																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5412.50</td> <td>51.54</td> <td>74.00</td> <td>-22.46</td> <td>38.55</td> <td>35.95</td> <td>9.66</td> <td>32.62</td> <td>100</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5412.50	51.54	74.00	-22.46	38.55	35.95	9.66	32.62	100	297	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5412.50	51.54	74.00	-22.46	38.55	35.95	9.66	32.62	100	297	PEAK																														
Avg	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5389.25</td> <td>44.72</td> <td>54.00</td> <td>-9.28</td> <td>31.80</td> <td>35.97</td> <td>9.57</td> <td>32.62</td> <td>100</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5389.25	44.72	54.00	-9.28	31.80	35.97	9.57	32.62	100	297	AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5389.25	44.72	54.00	-9.28	31.80	35.97	9.57	32.62	100	297	AVERAGE																														

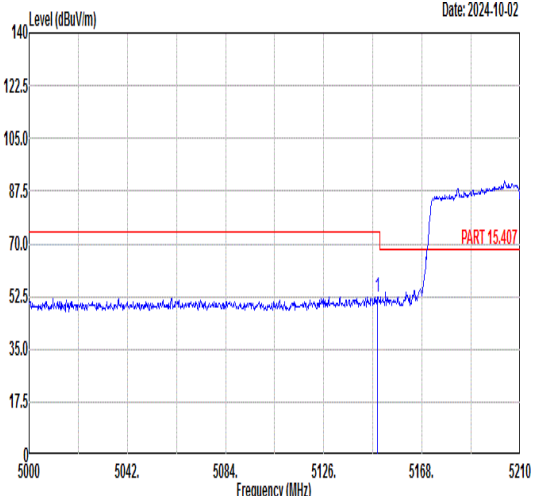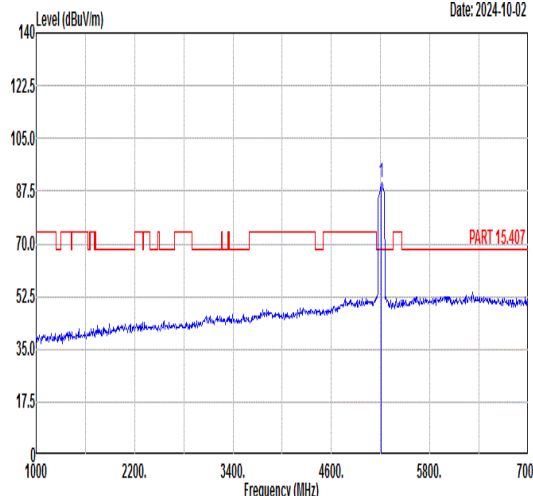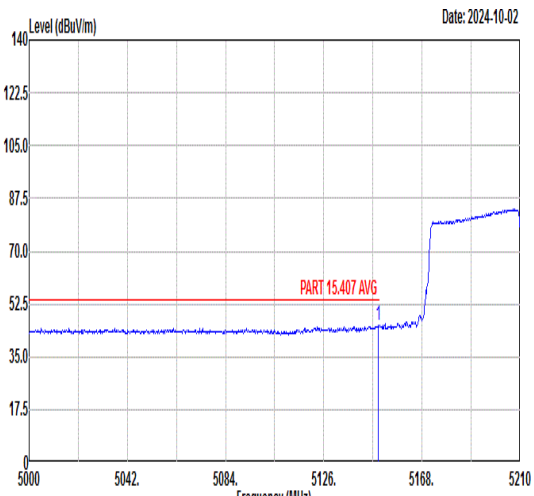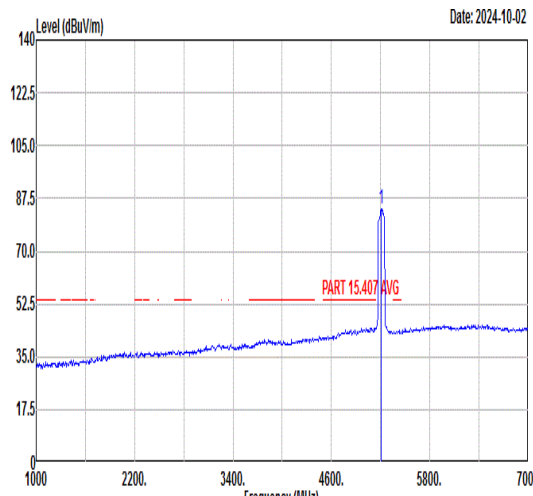

Mode	25																																																																															
	Band Edge - L																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																															
ANT	8																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.89</td> <td>52.40</td> <td>74.00</td> <td>-21.60</td> <td>40.43</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>300</td> <td>246 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.89	52.40	74.00	-21.60	40.43	36.11	8.53	32.67	300	246 PEAK	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>90.24</td> <td>-----</td> <td>-----</td> <td>78.15</td> <td>36.07</td> <td>8.68</td> <td>32.66</td> <td>300</td> <td>246 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	90.24	-----	-----	78.15	36.07	8.68	32.66	300	246 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5148.89	52.40	74.00	-21.60	40.43	36.11	8.53	32.67	300	246 PEAK																																																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5210.00	90.24	-----	-----	78.15	36.07	8.68	32.66	300	246 PEAK																																																																						
Avg	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.31</td> <td>45.67</td> <td>54.00</td> <td>-8.33</td> <td>33.70</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>300</td> <td>246 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.31	45.67	54.00	-8.33	33.70	36.11	8.53	32.67	300	246 AVERAGE	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>83.83</td> <td>-----</td> <td>-----</td> <td>71.77</td> <td>36.08</td> <td>8.64</td> <td>32.66</td> <td>300</td> <td>246 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	83.83	-----	-----	71.77	36.08	8.64	32.66	300	246 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5149.31	45.67	54.00	-8.33	33.70	36.11	8.53	32.67	300	246 AVERAGE																																																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5210.00	83.83	-----	-----	71.77	36.08	8.64	32.66	300	246 AVERAGE																																																																						



Mode	25																																								
	Band Edge - R																																								
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																								
ANT	8																																								
Pol.	Vertical	Fundamental																																							
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5404.75</td> <td>50.85</td> <td>74.00</td> <td>-23.15</td> <td>37.86</td> <td>35.96</td> <td>9.65</td> <td>32.62</td> <td>300</td> <td>246</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5404.75	50.85	74.00	-23.15	37.86	35.96	9.65	32.62	300	246	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5404.75	50.85	74.00	-23.15	37.86	35.96	9.65	32.62	300	246	PEAK																														
Avg	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5434.50</td> <td>44.28</td> <td>54.00</td> <td>-9.72</td> <td>31.28</td> <td>35.94</td> <td>9.67</td> <td>32.61</td> <td>300</td> <td>246</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5434.50	44.28	54.00	-9.72	31.28	35.94	9.67	32.61	300	246	AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5434.50	44.28	54.00	-9.72	31.28	35.94	9.67	32.61	300	246	AVERAGE																														







Mode	26																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_5290MHz																																																																									
ANT	8																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5038.28</td> <td>51.80</td> <td>74.00</td> <td>-22.20</td> <td>39.98</td> <td>36.18</td> <td>8.33</td> <td>32.69</td> <td>120 293 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5038.28	51.80	74.00	-22.20	39.98	36.18	8.33	32.69	120 293 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5290.00</td> <td>94.45</td> <td>-----</td> <td>-----</td> <td>81.98</td> <td>36.02</td> <td>9.09</td> <td>32.64</td> <td>120 293 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5290.00	94.45	-----	-----	81.98	36.02	9.09	32.64	120 293 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5038.28	51.80	74.00	-22.20	39.98	36.18	8.33	32.69	120 293 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5290.00	94.45	-----	-----	81.98	36.02	9.09	32.64	120 293 PEAK																																																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5091.93</td> <td>44.60</td> <td>54.00</td> <td>-9.40</td> <td>32.71</td> <td>36.14</td> <td>8.43</td> <td>32.68</td> <td>120 293 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5091.93	44.60	54.00	-9.40	32.71	36.14	8.43	32.68	120 293 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5290.00</td> <td>88.24</td> <td>-----</td> <td>-----</td> <td>75.83</td> <td>36.03</td> <td>9.02</td> <td>32.64</td> <td>120 293 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5290.00	88.24	-----	-----	75.83	36.03	9.02	32.64	120 293 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5091.93	44.60	54.00	-9.40	32.71	36.14	8.43	32.68	120 293 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5290.00	88.24	-----	-----	75.83	36.03	9.02	32.64	120 293 AVERAGE																																																																		



Mode	26																																								
	Band Edge - R																																								
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																								
ANT	8																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.37</td> <td>52.60</td> <td>74.00</td> <td>-21.40</td> <td>39.87</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> <td>120</td> <td>293</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5351.37	52.60	74.00	-21.40	39.87	35.99	9.37	32.63	120	293	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5351.37	52.60	74.00	-21.40	39.87	35.99	9.37	32.63	120	293	PEAK																														
Avg	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.35</td> <td>46.95</td> <td>54.00</td> <td>-7.05</td> <td>34.22</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> <td>120</td> <td>293</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.35	46.95	54.00	-7.05	34.22	35.99	9.37	32.63	120	293	AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5350.35	46.95	54.00	-7.05	34.22	35.99	9.37	32.63	120	293	AVERAGE																														

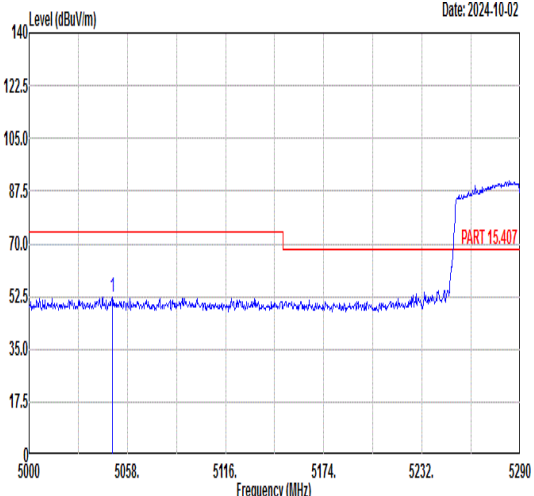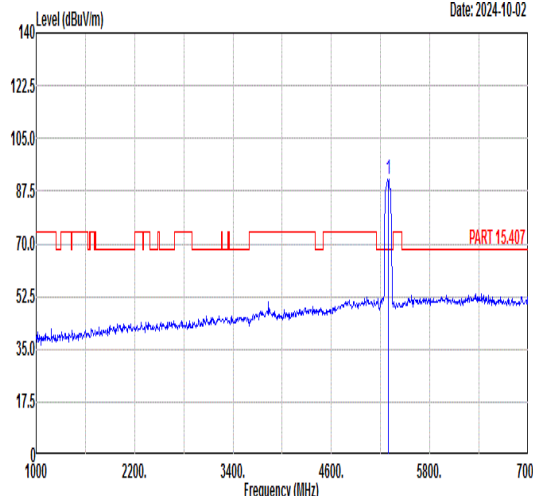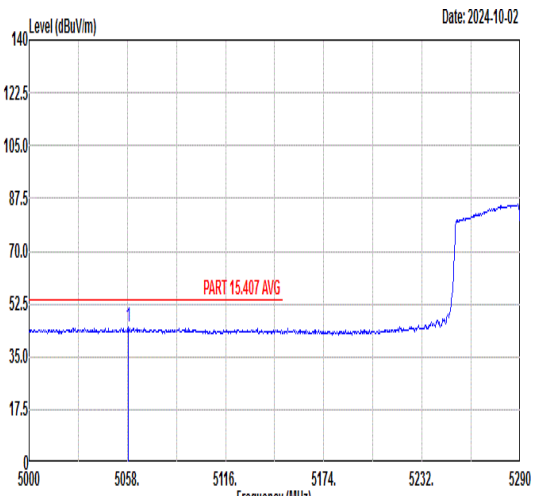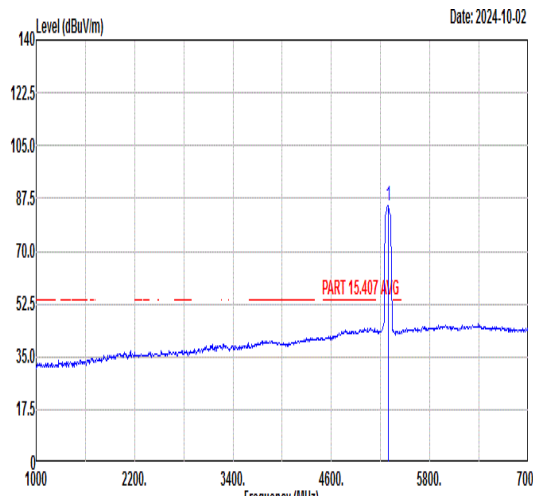

Mode	26																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_5290MHz																																																																									
ANT	8																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5049.01</td> <td>52.29</td> <td>74.00</td> <td>-21.71</td> <td>40.46</td> <td>36.17</td> <td>8.35</td> <td>32.69</td> <td>320 244 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5049.01	52.29	74.00	-21.71	40.46	36.17	8.35	32.69	320 244 PEAK	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5290.00</td> <td>91.28</td> <td>-----</td> <td>-----</td> <td>78.78</td> <td>36.02</td> <td>9.12</td> <td>32.64</td> <td>320 244 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5290.00	91.28	-----	-----	78.78	36.02	9.12	32.64	320 244 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5049.01	52.29	74.00	-21.71	40.46	36.17	8.35	32.69	320 244 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5290.00	91.28	-----	-----	78.78	36.02	9.12	32.64	320 244 PEAK																																																																		
Avg	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5058.58</td> <td>44.80</td> <td>54.00</td> <td>-9.20</td> <td>32.96</td> <td>36.16</td> <td>8.37</td> <td>32.69</td> <td>320 244 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5058.58	44.80	54.00	-9.20	32.96	36.16	8.37	32.69	320 244 AVERAGE	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5290.00</td> <td>85.23</td> <td>-----</td> <td>-----</td> <td>72.82</td> <td>36.03</td> <td>9.02</td> <td>32.64</td> <td>320 244 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5290.00	85.23	-----	-----	72.82	36.03	9.02	32.64	320 244 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5058.58	44.80	54.00	-9.20	32.96	36.16	8.37	32.69	320 244 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5290.00	85.23	-----	-----	72.82	36.03	9.02	32.64	320 244 AVERAGE																																																																		





Mode	26																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																					
ANT	8																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5434.67</td> <td>50.78</td> <td>74.00</td> <td>-23.22</td> <td>37.78</td> <td>35.94</td> <td>9.67</td> <td>32.61</td> <td>320 244 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5434.67	50.78	74.00	-23.22	37.78	35.94	9.67	32.61	320 244 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5434.67	50.78	74.00	-23.22	37.78	35.94	9.67	32.61	320 244 PEAK																														
Avg	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5354.60</td> <td>45.00</td> <td>54.00</td> <td>-9.00</td> <td>32.25</td> <td>35.99</td> <td>9.39</td> <td>32.63</td> <td>320 244 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5354.60	45.00	54.00	-9.00	32.25	35.99	9.39	32.63	320 244 AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5354.60	45.00	54.00	-9.00	32.25	35.99	9.39	32.63	320 244 AVERAGE																														







	<b>27</b>																																																																									
<b>Mode</b>	<b>Band Edge - L</b>																																																																									
	<b>U-NII-2C_5.47-5.725_802.11ac_VHT80_CH106_5530MHz</b>																																																																									
<b>ANT</b>	<b>8</b>																																																																									
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																								
<b>Peak</b>	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.68</td> <td>55.52</td> <td>74.00</td> <td>-18.48</td> <td>42.52</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> <td>100</td> <td>291</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.52</td> <td>57.08</td> <td>68.30</td> <td>-11.22</td> <td>44.08</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>100</td> <td>291</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg	1	5453.68	55.52	74.00	-18.48	42.52	35.93	9.68	32.61	100	291	PEAK	2	5469.52	57.08	68.30	-11.22	44.08	35.92	9.69	32.61	100	291	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>95.52</td> <td>-----</td> <td>-----</td> <td>82.48</td> <td>35.93</td> <td>9.72</td> <td>32.61</td> <td>100</td> <td>291</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg	1	5530.00	95.52	-----	-----	82.48	35.93	9.72	32.61	100	291	PEAK
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg																																																																	
1	5453.68	55.52	74.00	-18.48	42.52	35.93	9.68	32.61	100	291	PEAK																																																															
2	5469.52	57.08	68.30	-11.22	44.08	35.92	9.69	32.61	100	291	PEAK																																																															
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg																																																																	
1	5530.00	95.52	-----	-----	82.48	35.93	9.72	32.61	100	291	PEAK																																																															
<b>Avg</b>	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.90</td> <td>48.80</td> <td>54.00</td> <td>-5.20</td> <td>35.80</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>100</td> <td>291</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg	1	5458.90	48.80	54.00	-5.20	35.80	35.92	9.69	32.61	100	291	AVERAGE	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>89.51</td> <td>-----</td> <td>-----</td> <td>76.46</td> <td>35.94</td> <td>9.72</td> <td>32.61</td> <td>100</td> <td>291</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg	1	5530.00	89.51	-----	-----	76.46	35.94	9.72	32.61	100	291	AVERAGE												
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg																																																																	
1	5458.90	48.80	54.00	-5.20	35.80	35.92	9.69	32.61	100	291	AVERAGE																																																															
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg																																																																	
1	5530.00	89.51	-----	-----	76.46	35.94	9.72	32.61	100	291	AVERAGE																																																															



Mode	27																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																								
ANT	8																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5737.74</td> <td>51.96</td> <td>68.30</td> <td>-16.34</td> <td>38.38</td> <td>36.23</td> <td>10.05</td> <td>32.70</td> <td>100</td> <td>291</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5737.74	51.96	68.30	-16.34	38.38	36.23	10.05	32.70	100	291	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	Level	Factor	Loss Factor																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5737.74	51.96	68.30	-16.34	38.38	36.23	10.05	32.70	100	291	PEAK																														

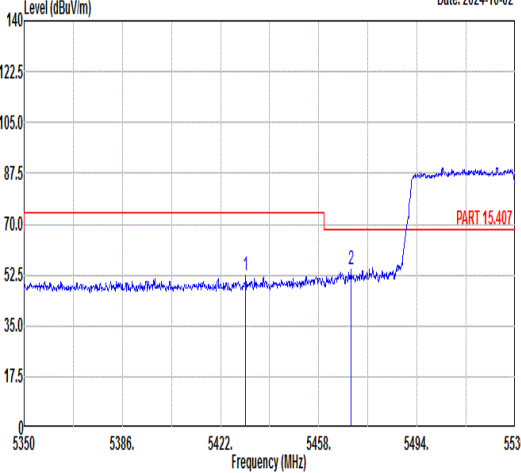
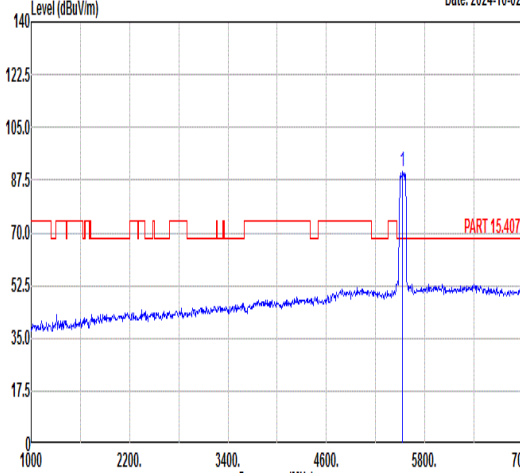
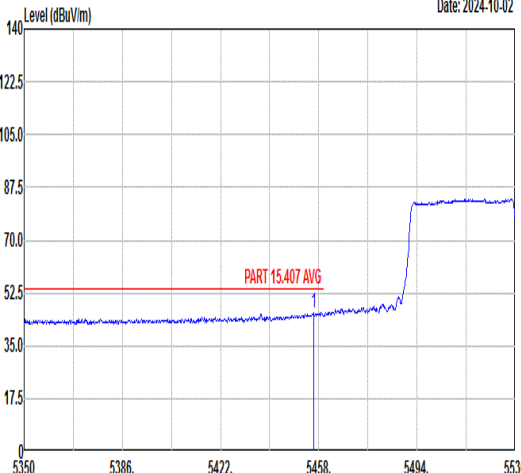
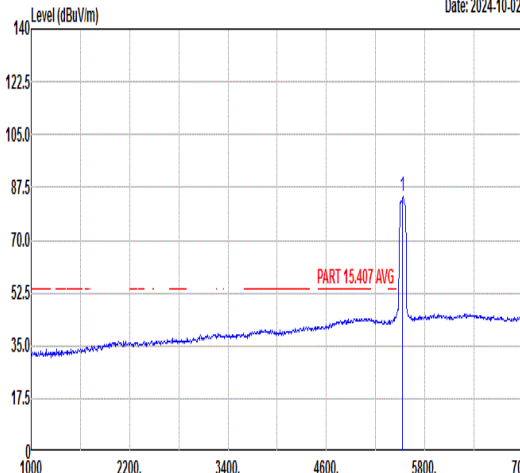


	<b>27</b>																																																																									
<b>Mode</b>	<b>Band Edge - L</b>																																																																									
	<b>U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz</b>																																																																									
<b>ANT</b>	<b>8</b>																																																																									
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																								
<b>Peak</b>	<p style="text-align: right;">Date: 2024-10-02</p>  <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5431.18</td> <td>52.11</td> <td>74.00</td> <td>-21.89</td> <td>39.11</td> <td>35.94</td> <td>9.67</td> <td>32.61</td> <td>303</td> <td>244</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.88</td> <td>54.62</td> <td>68.30</td> <td>-13.68</td> <td>41.62</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>303</td> <td>244</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5431.18	52.11	74.00	-21.89	39.11	35.94	9.67	32.61	303	244	PEAK	2	5469.88	54.62	68.30	-13.68	41.62	35.92	9.69	32.61	303	244	PEAK	<p style="text-align: right;">Date: 2024-10-02</p>  <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>90.09</td> <td>-----</td> <td>-----</td> <td>77.04</td> <td>35.94</td> <td>9.72</td> <td>32.61</td> <td>303</td> <td>244</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5530.00	90.09	-----	-----	77.04	35.94	9.72	32.61	303	244	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																		
1	5431.18	52.11	74.00	-21.89	39.11	35.94	9.67	32.61	303	244	PEAK																																																															
2	5469.88	54.62	68.30	-13.68	41.62	35.92	9.69	32.61	303	244	PEAK																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																		
1	5530.00	90.09	-----	-----	77.04	35.94	9.72	32.61	303	244	PEAK																																																															
<b>Avg</b>	<p style="text-align: right;">Date: 2024-10-02</p>  <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.02</td> <td>45.86</td> <td>54.00</td> <td>-8.14</td> <td>32.85</td> <td>35.93</td> <td>9.69</td> <td>32.61</td> <td>303</td> <td>244</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5456.02	45.86	54.00	-8.14	32.85	35.93	9.69	32.61	303	244	AVERAGE	<p style="text-align: right;">Date: 2024-10-02</p>  <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>84.31</td> <td>-----</td> <td>-----</td> <td>71.24</td> <td>35.95</td> <td>9.73</td> <td>32.61</td> <td>303</td> <td>244</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5530.00	84.31	-----	-----	71.24	35.95	9.73	32.61	303	244	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																		
1	5456.02	45.86	54.00	-8.14	32.85	35.93	9.69	32.61	303	244	AVERAGE																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																		
1	5530.00	84.31	-----	-----	71.24	35.95	9.73	32.61	303	244	AVERAGE																																																															



Mode	27																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																					
ANT	8																																					
Pol.	Vertical	Fundamental																																				
Peak	<p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5730.69</td> <td>52.29</td> <td>68.30</td> <td>-16.01</td> <td>38.73</td> <td>36.22</td> <td>10.03</td> <td>32.69</td> <td>303 244 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5730.69	52.29	68.30	-16.01	38.73	36.22	10.03	32.69	303 244 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																															
Freq	Level	Line	Level	Factor	Loss Factor			Remark																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5730.69	52.29	68.30	-16.01	38.73	36.22	10.03	32.69	303 244 PEAK																														

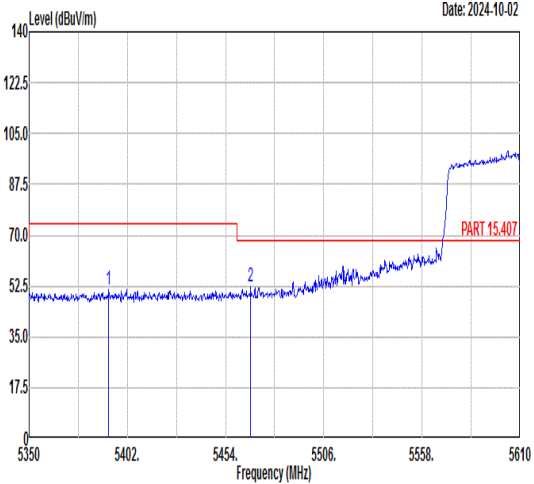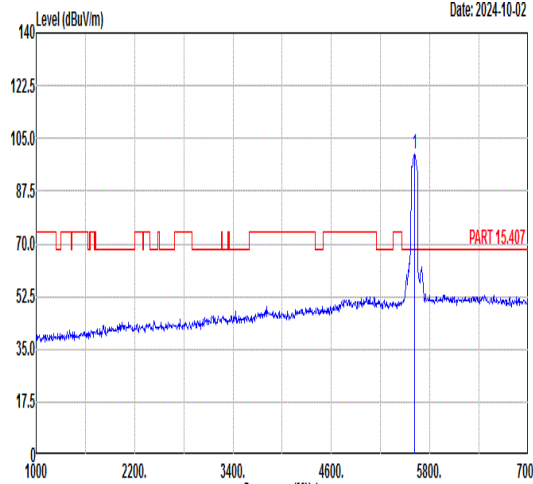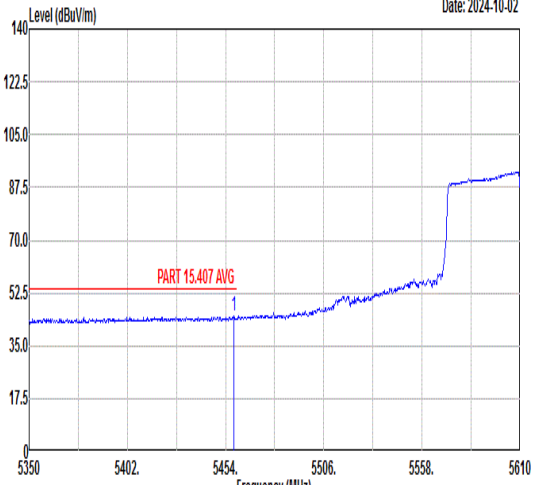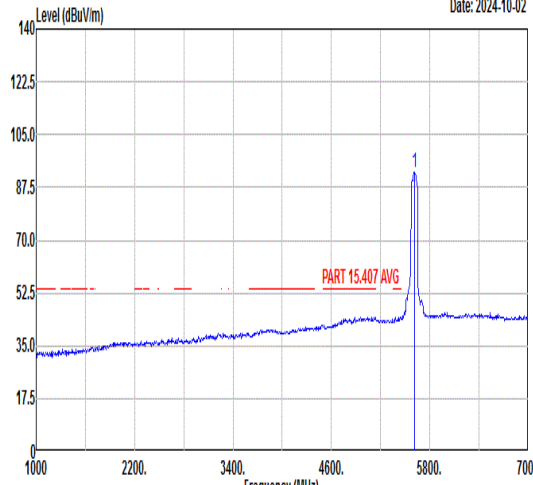

	<b>28</b>																																																																																								
<b>Mode</b>	<b>Band Edge - L</b>																																																																																								
	<b>U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz</b>																																																																																								
<b>ANT</b>	<b>8</b>																																																																																								
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																							
<b>Peak</b>	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5392.12</td> <td>51.51</td> <td>74.00</td> <td>-22.49</td> <td>38.59</td> <td>35.96</td> <td>9.58</td> <td>32.62</td> <td>100</td> <td>293 PEAK</td> </tr> <tr> <td>2</td> <td>5467.26</td> <td>52.29</td> <td>68.30</td> <td>-16.01</td> <td>39.29</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>100</td> <td>293 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5392.12	51.51	74.00	-22.49	38.59	35.96	9.58	32.62	100	293 PEAK	2	5467.26	52.29	68.30	-16.01	39.29	35.92	9.69	32.61	100	293 PEAK	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>99.68</td> <td>-----</td> <td>-----</td> <td>86.48</td> <td>36.06</td> <td>9.79</td> <td>32.65</td> <td>100</td> <td>293 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	99.68	-----	-----	86.48	36.06	9.79	32.65	100	293 PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5392.12	51.51	74.00	-22.49	38.59	35.96	9.58	32.62	100	293 PEAK																																																																															
2	5467.26	52.29	68.30	-16.01	39.29	35.92	9.69	32.61	100	293 PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5610.00	99.68	-----	-----	86.48	36.06	9.79	32.65	100	293 PEAK																																																																															
<b>Avg</b>	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.42</td> <td>44.92</td> <td>54.00</td> <td>-9.08</td> <td>31.92</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>100</td> <td>293 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5458.42	44.92	54.00	-9.08	31.92	35.92	9.69	32.61	100	293 AVERAGE	 <p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>92.54</td> <td>-----</td> <td>-----</td> <td>79.34</td> <td>36.06</td> <td>9.79</td> <td>32.65</td> <td>100</td> <td>293 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	92.54	-----	-----	79.34	36.06	9.79	32.65	100	293 AVERAGE											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5458.42	44.92	54.00	-9.08	31.92	35.92	9.69	32.61	100	293 AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5610.00	92.54	-----	-----	79.34	36.06	9.79	32.65	100	293 AVERAGE																																																																															



Mode	28																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																								
ANT	8																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5732.30</td> <td>53.83</td> <td>68.30</td> <td>-14.47</td> <td>40.26</td> <td>36.23</td> <td>10.03</td> <td>32.69</td> <td>100</td> <td>293</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5732.30	53.83	68.30	-14.47	40.26	36.23	10.03	32.69	100	293	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Level	Factor	Loss Factor			Remark																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5732.30	53.83	68.30	-14.47	40.26	36.23	10.03	32.69	100	293	PEAK																														



	<b>28</b>																																																																																											
<b>Mode</b>	<b>Band Edge - L</b>																																																																																											
	<b>U-NII-2C_5.47-5.725_802.11ac_VHT80_CH122_5610MHz</b>																																																																																											
<b>ANT</b>	<b>8</b>																																																																																											
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																										
<b>Peak</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5413.70</td> <td>50.52</td> <td>74.00</td> <td>-23.48</td> <td>37.53</td> <td>35.95</td> <td>9.66</td> <td>32.62</td> <td>100</td> <td>247</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5465.44</td> <td>49.93</td> <td>68.30</td> <td>-18.37</td> <td>36.93</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>100</td> <td>247</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5413.70	50.52	74.00	-23.48	37.53	35.95	9.66	32.62	100	247	PEAK	2	5465.44	49.93	68.30	-18.37	36.93	35.92	9.69	32.61	100	247	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>91.11</td> <td>-----</td> <td>-----</td> <td>77.89</td> <td>36.07</td> <td>9.80</td> <td>32.65</td> <td>100</td> <td>247</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5610.00	91.11	-----	-----	77.89	36.07	9.80	32.65	100	247	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																				
1	5413.70	50.52	74.00	-23.48	37.53	35.95	9.66	32.62	100	247	PEAK																																																																																	
2	5465.44	49.93	68.30	-18.37	36.93	35.92	9.69	32.61	100	247	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																				
1	5610.00	91.11	-----	-----	77.89	36.07	9.80	32.65	100	247	PEAK																																																																																	
<b>Avg</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.30</td> <td>44.13</td> <td>54.00</td> <td>-9.87</td> <td>31.13</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> <td>100</td> <td>247</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5455.30	44.13	54.00	-9.87	31.13	35.93	9.68	32.61	100	247	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>84.61</td> <td>-----</td> <td>-----</td> <td>71.43</td> <td>36.05</td> <td>9.77</td> <td>32.64</td> <td>100</td> <td>247</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5610.00	84.61	-----	-----	71.43	36.05	9.77	32.64	100	247	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																				
1	5455.30	44.13	54.00	-9.87	31.13	35.93	9.68	32.61	100	247	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																				
1	5610.00	84.61	-----	-----	71.43	36.05	9.77	32.64	100	247	AVERAGE																																																																																	





Mode	28																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																								
ANT	8																																								
Pol.	Vertical	Fundamental																																							
Peak	<p style="text-align: right;">Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5729.51</td> <td>51.59</td> <td>68.30</td> <td>-16.71</td> <td>38.03</td> <td>36.22</td> <td>10.03</td> <td>32.69</td> <td>100</td> <td>247</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5729.51	51.59	68.30	-16.71	38.03	36.22	10.03	32.69	100	247	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Level	Factor	Loss Factor			Remark																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5729.51	51.59	68.30	-16.71	38.03	36.22	10.03	32.69	100	247	PEAK																														



Mode	31																																																																																																																			
	Band Edge																																																																																																																			
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																			
ANT	8																																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																																		
Peak	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5618.27</td> <td>52.25</td> <td>68.30</td> <td>-16.05</td> <td>39.04</td> <td>36.07</td> <td>9.79</td> <td>32.65</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.61</td> <td>51.70</td> <td>68.75</td> <td>-17.05</td> <td>38.39</td> <td>36.11</td> <td>9.86</td> <td>32.66</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5713.83</td> <td>67.97</td> <td>109.07</td> <td>-41.10</td> <td>54.46</td> <td>36.20</td> <td>10.00</td> <td>32.69</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.22</td> <td>71.75</td> <td>113.58</td> <td>-41.83</td> <td>58.22</td> <td>36.21</td> <td>10.01</td> <td>32.69</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	5618.27	52.25	68.30	-16.05	39.04	36.07	9.79	32.65	100	292	PEAK	2	5650.61	51.70	68.75	-17.05	38.39	36.11	9.86	32.66	100	292	PEAK	3	5713.83	67.97	109.07	-41.10	54.46	36.20	10.00	32.69	100	292	PEAK	4	5721.22	71.75	113.58	-41.83	58.22	36.21	10.01	32.69	100	292	PEAK	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>109.62</td> <td>-----</td> <td>-----</td> <td>96.02</td> <td>36.24</td> <td>10.06</td> <td>32.70</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	5745.00	109.62	-----	-----	96.02	36.24	10.06	32.70	100	292	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																																												
1	5618.27	52.25	68.30	-16.05	39.04	36.07	9.79	32.65	100	292	PEAK																																																																																																									
2	5650.61	51.70	68.75	-17.05	38.39	36.11	9.86	32.66	100	292	PEAK																																																																																																									
3	5713.83	67.97	109.07	-41.10	54.46	36.20	10.00	32.69	100	292	PEAK																																																																																																									
4	5721.22	71.75	113.58	-41.83	58.22	36.21	10.01	32.69	100	292	PEAK																																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																																												
1	5745.00	109.62	-----	-----	96.02	36.24	10.06	32.70	100	292	PEAK																																																																																																									
Avg	Blank	<p>Date: 2024-10-02</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.62</td> <td>-----</td> <td>-----</td> <td>89.02</td> <td>36.24</td> <td>10.06</td> <td>32.70</td> <td>100</td> <td>292</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	5745.00	102.62	-----	-----	89.02	36.24	10.06	32.70	100	292	AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																																												
1	5745.00	102.62	-----	-----	89.02	36.24	10.06	32.70	100	292	AVERAGE																																																																																																									