

深圳市蒙正科技有限公司

Shenzhen Mengzheng Technology Co., Ltd

承认书封面 APPROVAL SHEET


product description Part Description	Manufacturer: Dongguan Jereisi Technology Co., Ltd. Ven do Product name: Single coil of mobile phone Product Name material code: Part No .	Specification, model / version: G 43-0.8-6.5UH-32MM Des crip tion Project model: Proj ect		
Sample use	<input checked="" type="checkbox"/> structure sample <input type="checkbox"/> The old sample is invalid	<input type="checkbox"/> Color sample (reference Code for structure detection): Structure signature 		
appendix: Att achments	<input checked="" type="checkbox"/> sample Sa mple <input checked="" type="checkbox"/> Reliability test report Reliability Report <input checked="" type="checkbox"/> FAI full-size report FAI Report <input checked="" type="checkbox"/> manner of packing Packing Content	<input checked="" type="checkbox"/> specification Spe c <input checked="" type="checkbox"/> Engineering drawing surface Draw ing <input checked="" type="checkbox"/> Material certificate Material Verification Sheet <input type="checkbox"/> safety regulations report Safety Report	<input type="checkbox"/> SGS report SGS Report	
Supplier signed V endor	Formulation: Lu Lin D esign	Review: Deng Xianggui Check	Approval: Lu Rusheng Approva l	
Technical confirmation bar Techno logy Check	structure: M D hardware: H W	Industrial / packaging material design: I D project manager: P M		
Development quality signed PM approval	<input checked="" type="checkbox"/> admit Approved <input type="checkbox"/> Conditional admission of the Condition Approved <input type="checkbox"/> Temporary admission of the Temporary Approved	<input type="checkbox"/> disallow Reject The condition needs to be met: <hr/> Limited procurement of _____ Pcs RD quality: Design Quality		
Distribution Department: Distri bute	<input checked="" type="checkbox"/> supplier <input checked="" type="checkbox"/> research and development	<input checked="" type="checkbox"/> quality <input type="checkbox"/> cultural control	<input type="checkbox"/> engineering <input type="checkbox"/> client	<input checked="" type="checkbox"/> outsourcing factory <input type="checkbox"/> Other _____

I. Catalogue:


1. The cover cover of
the.....
..... Page 1-1
2.
Catalogue.....
..... Page 2-2
3. Product
Figure.....
..... Page # 3-3
4. Size
drawing.....
..... Page 4-4
5. Product
parameters:.....
..... Page 5-5
6. Technical
requirements.....
..... Page 5-5
7. Electrical activity
parameter.....
..... Page 5-5
8. Packaging
for.....
..... Page 6-6
9. Material
list.....
..... Page 7-7



Ii. Product drawing surface:

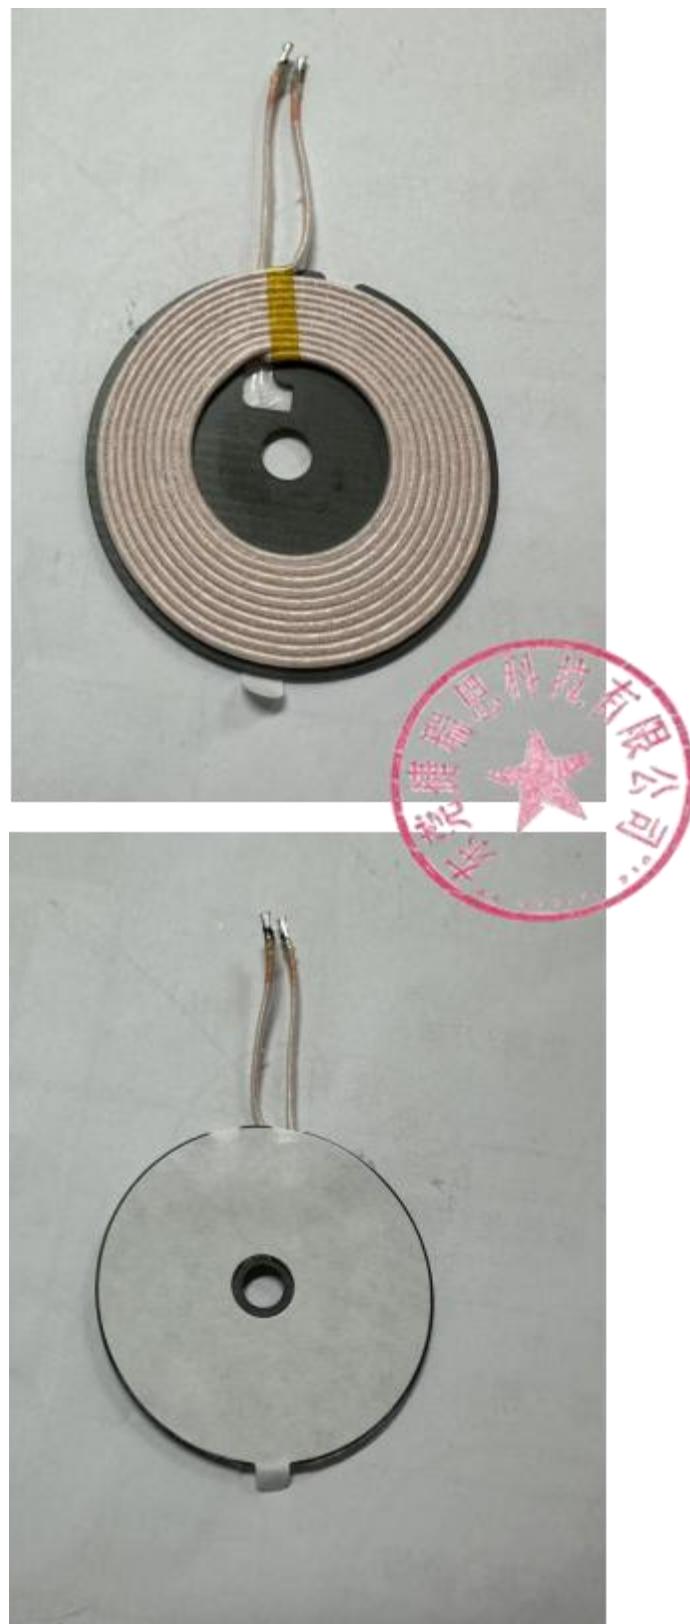

3, plane structure diagram: Unit: MM

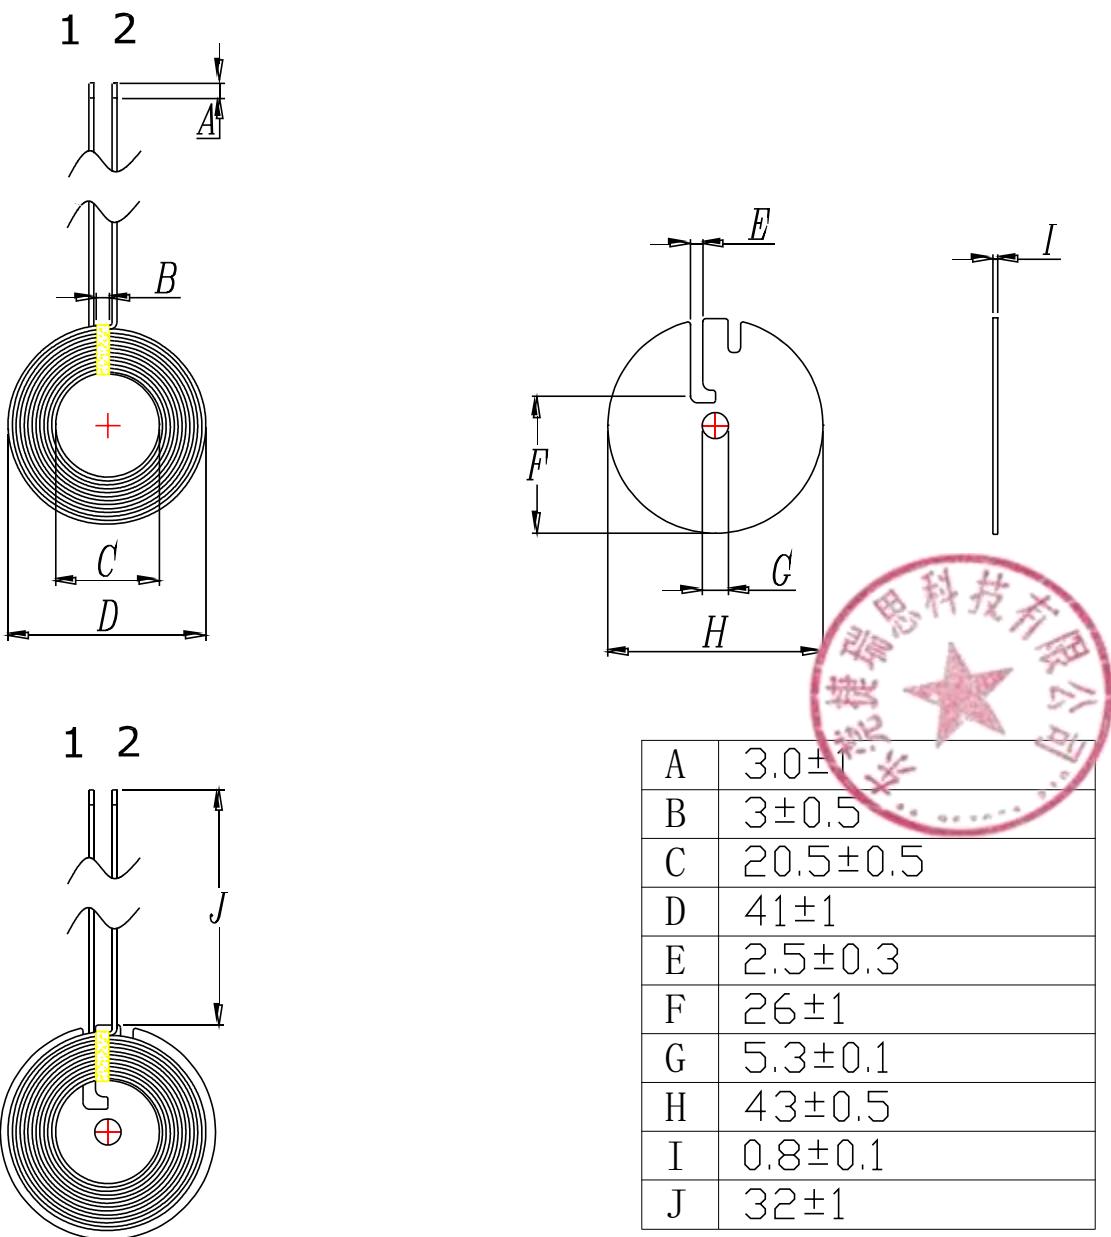

4. Product parameters:

foot position	Line diameter	number of turns	remarks
1 - 2	0.08*105P	10	silk-covered wire

V. Technical requirements:

1. Fix the line head and tail to prevent line loosening and breaking
2. According to the customer requirements, the line wire shear, tin, tin depth of $3 \pm 1\text{MM}$
3. Point the appropriate white glue on the magnetic chip, stick the coil, and ensure that the product surface is clean and tidy in the process
4. The magnetic sheet used is a hard substrate, with no damage
5. Add 42mm double-sided adhesive to the back of the finished product, and the rear packaging.
6. Additional process (according to customer requirements): pack 3MM high-temperature adhesive tape

Vi. Electrical activity parameters:

1. Intance value, Q value:

PIN 1 - 2 = $6.3 \pm 0.3\text{UH}$

The above inductance value takes Quanhua 1062A instrument and 10 KHZ / 0.3 Vrms as the standard or equivalent instrument.

Vii. Packaging:



Figure 1: Single-layer foam tray
1 box-pack of 270 PCS



Figure 2: Unified direction line is neatly discharged into the plate,



Figure 3: Put in the packing box and place
each box
4 layer



Figure 4: Seal box, seal box with transparent
glue

料号: _____
品名: _____
规格: _____
数量: _____
日期: _____



Figure 5: Packaging box label Figure 6: Material stacked, neat and tidy, the label is
convenient to find materials

Viii. List of Materials:

order number	name	material quality	supplier	remarks
1	silk-covered wire	0.08 * 105P wire wrap wire	Vihan or equivalent	
2	magnetic sheet	G 43 * 0.8 hard substrate	Tiantong or equivalent	
3	tin	High temperature environmental protection	Thousand islands or equivalent	
4	alban	BY 882	Treasure month or equivalent	
5	double faced adhesive tape	Ø42mm	Honghui or equivalent	
6	adhesive tape	High-temperature resistance of 280°C -3MM	Philosophgrou p or equivalent	Additional processes , according to the customer's requirements