


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Horizontal


125 dBuV/m

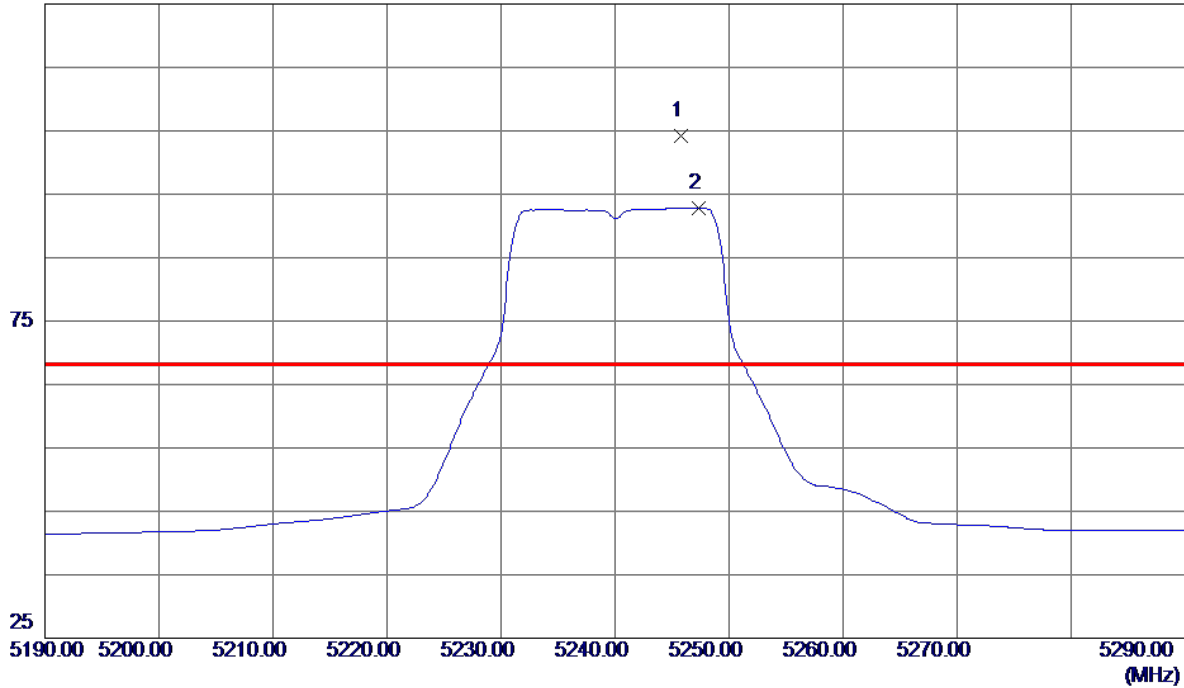

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5245.8000	62.67	41.59	104.26	68.30	35.96	Peak	No Limit
2	5247.3000	51.25	41.60	92.85	999.00	-906.15	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Horizontal

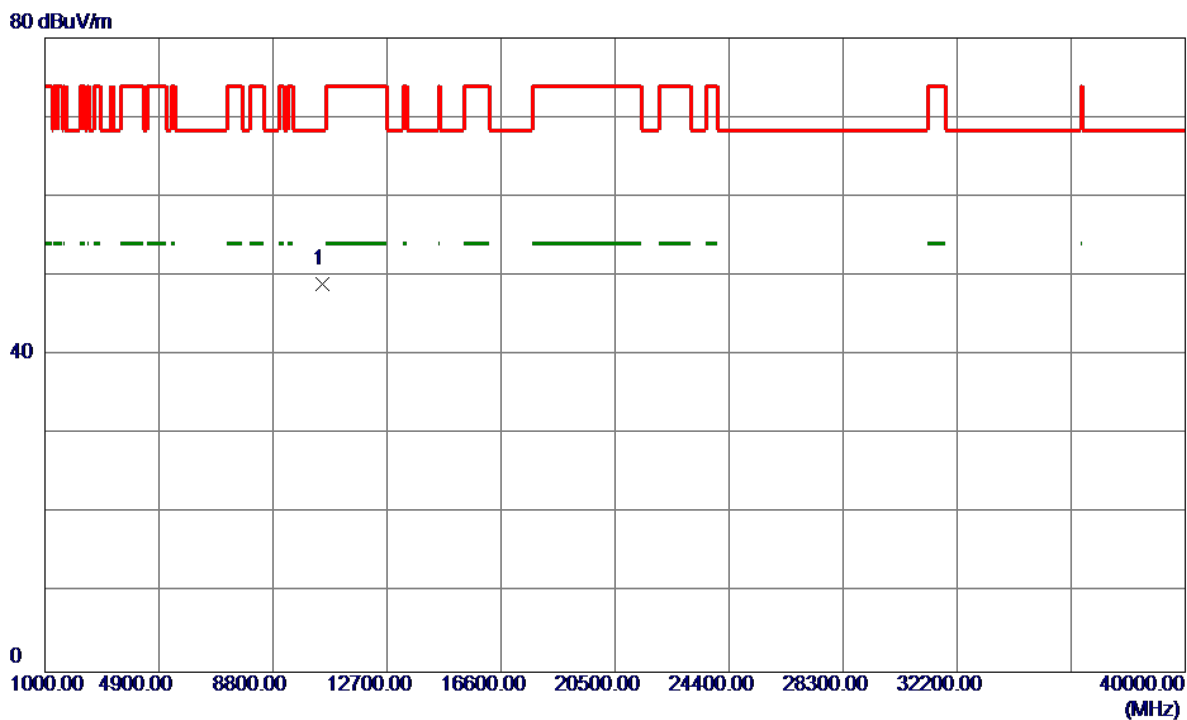


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10477.5000	32.29	16.64	48.93	68.30	-19.37	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical


125 dBuV/m

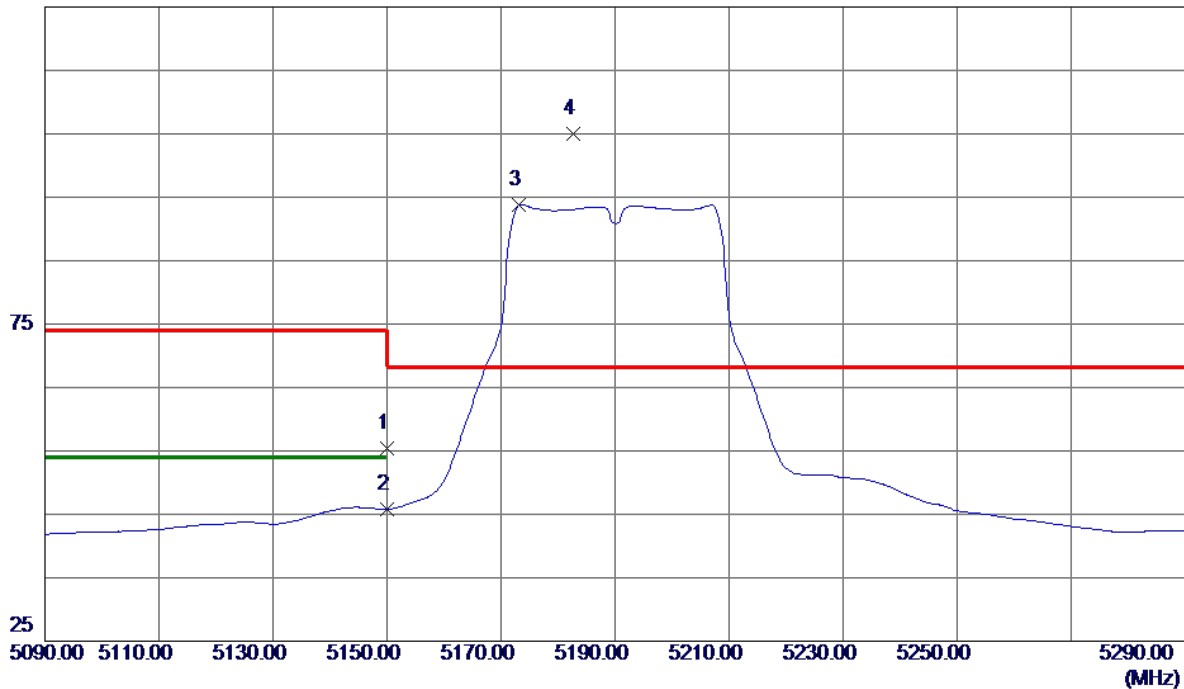

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5150.0000	14.35	41.10	55.45	74.00	-18.55	Peak	
2	5150.0000	4.66	41.10	45.76	54.00	-8.24	AVG	
3	5173.2000	52.67	41.22	93.89	999.00	-905.11	AVG	No Limit
4 *	5182.6000	63.68	41.27	104.95	68.30	36.65	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

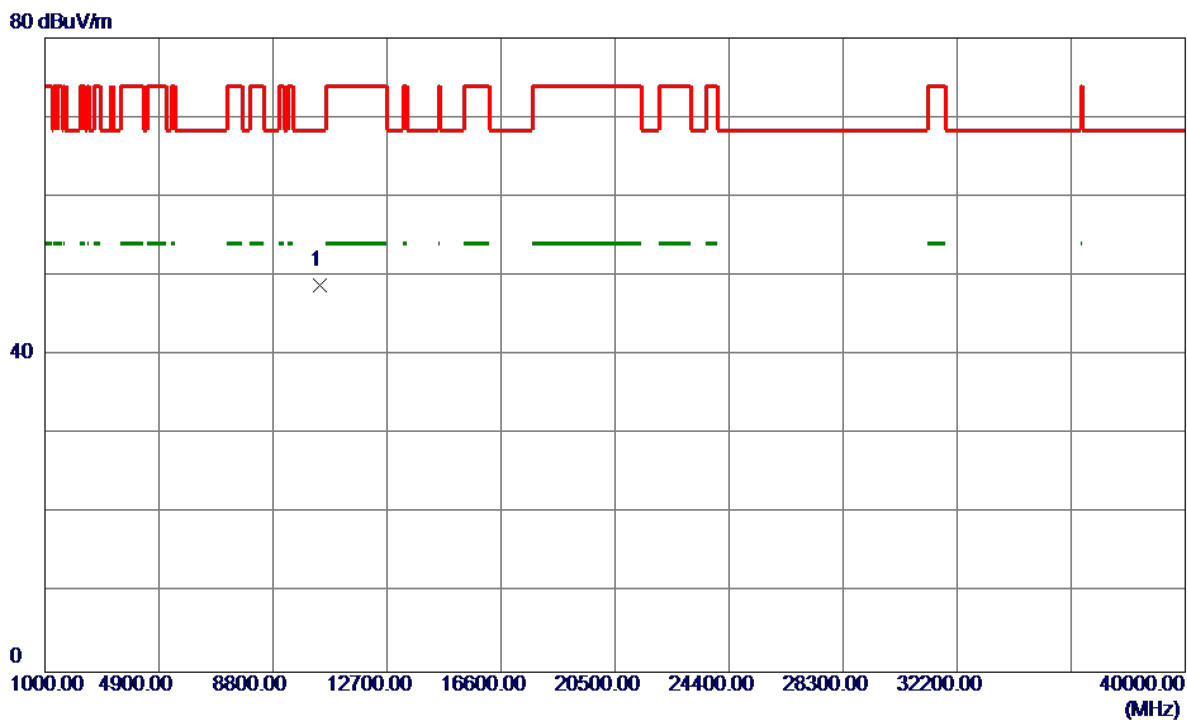


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10386.1200	32.41	16.40	48.81	68.30	-19.49	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal


125 dBuV/m

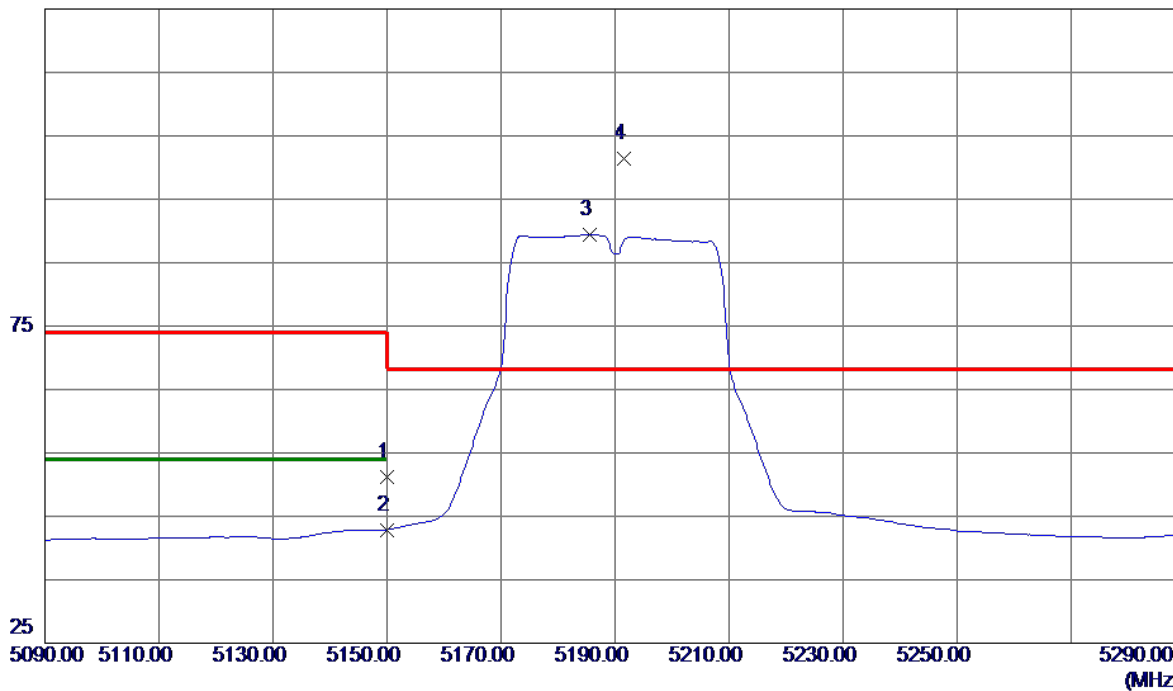

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	10.16	41.10	51.26	74.00	-22.74	Peak	
2	5150.0000	1.78	41.10	42.88	54.00	-11.12	AVG	
3	5185.6000	48.09	41.28	89.37	999.00	-909.63	AVG	No Limit
4 *	5191.6000	60.01	41.31	101.32	68.30	33.02	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal

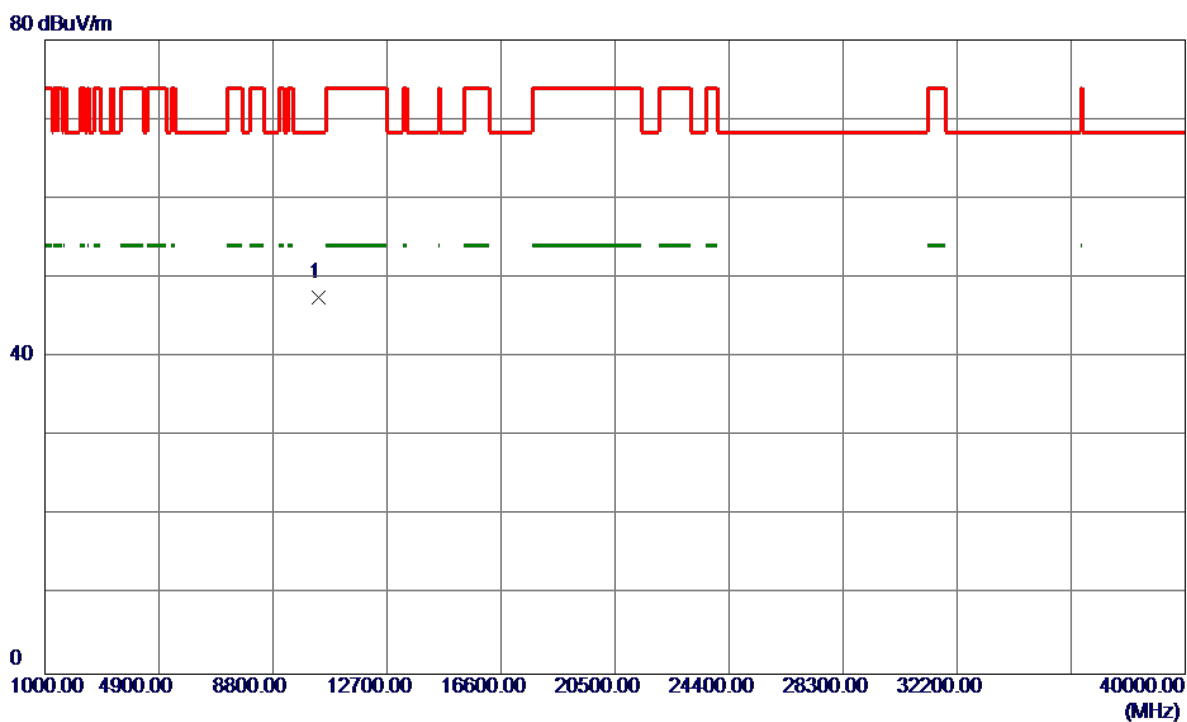


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10374.5400	31.19	16.37	47.56	68.30	-20.74	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical

125 dBuV/m

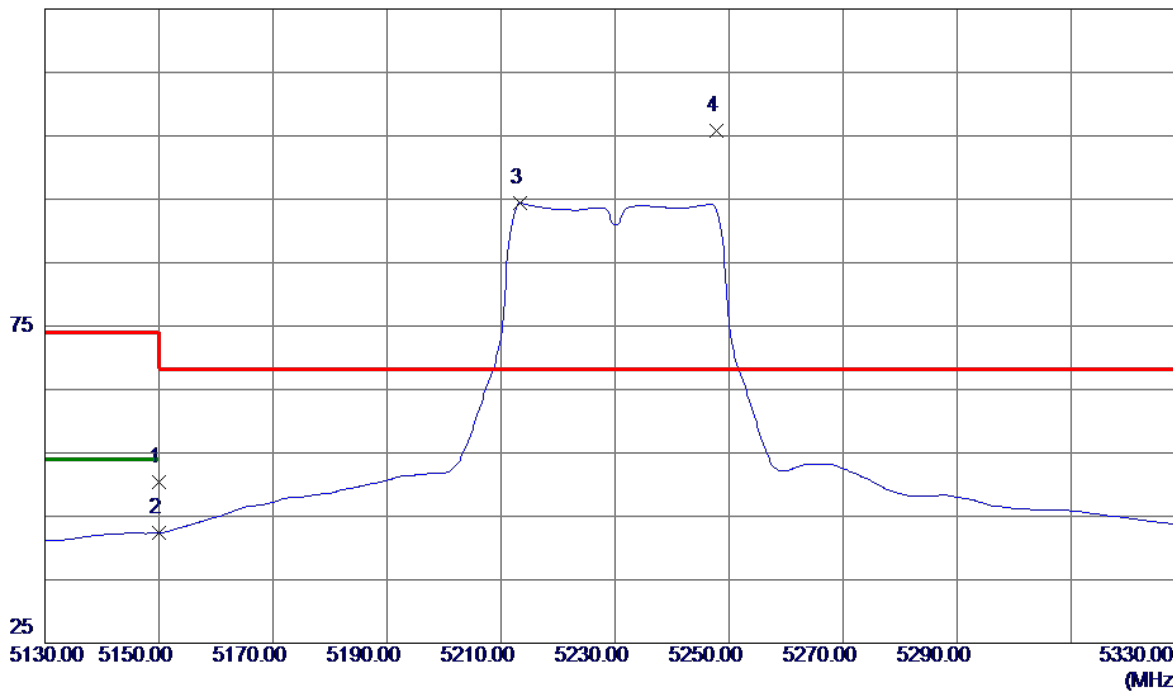


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	9.21	41.10	50.31	74.00	-23.69	Peak	
2	5150.0000	1.26	41.10	42.36	54.00	-11.64	AVG	
3	5213.4000	52.95	41.42	94.37	999.00	-904.63	AVG	No Limit
4 *	5247.8000	64.26	41.60	105.86	68.30	37.56	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical

80 dBuV/m

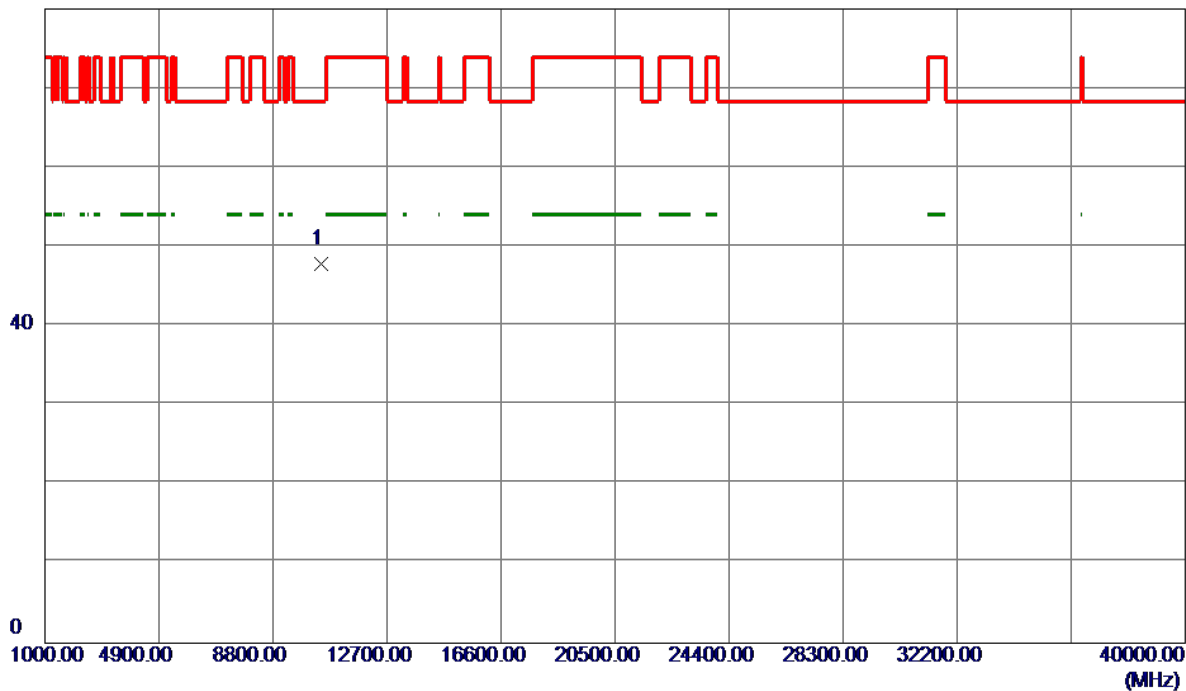


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10464.8800	31.29	16.61	47.90	68.30	-20.40	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal


125 dBuV/m

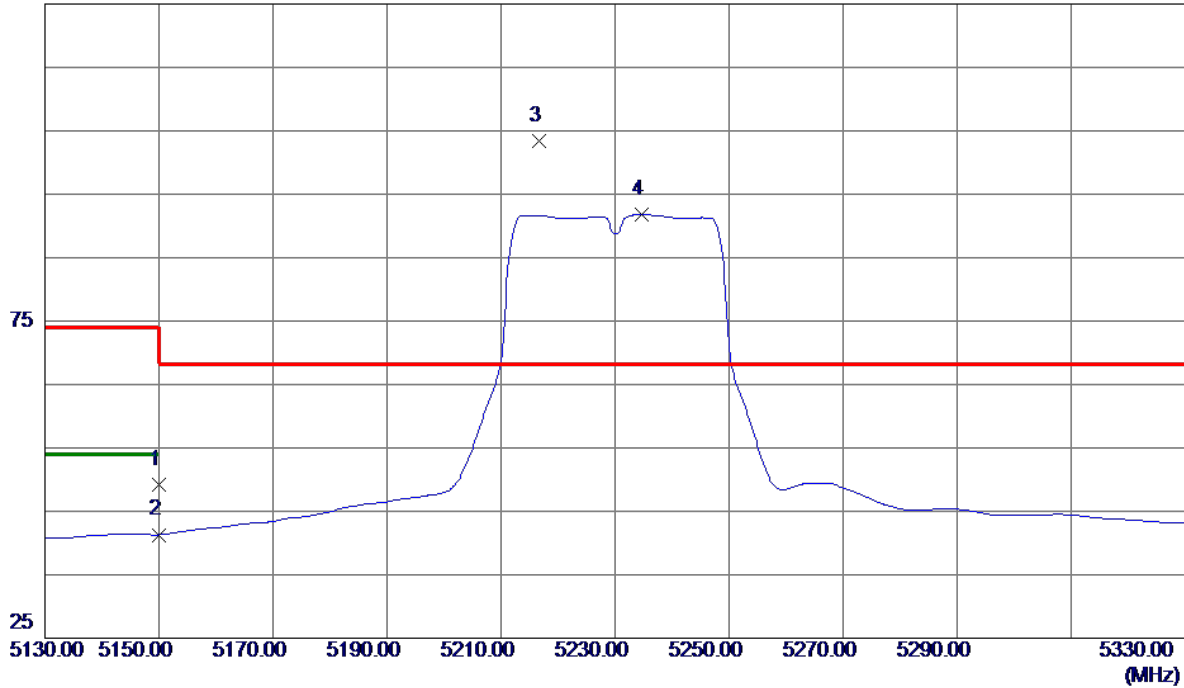

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	8.12	41.10	49.22	74.00	-24.78	Peak	
2	5150.0000	0.20	41.10	41.30	54.00	-12.70	AVG	
3 *	5216.6000	61.97	41.44	103.41	68.30	35.11	Peak	No Limit
4	5234.6000	50.25	41.53	91.78	999.00	-907.22	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal

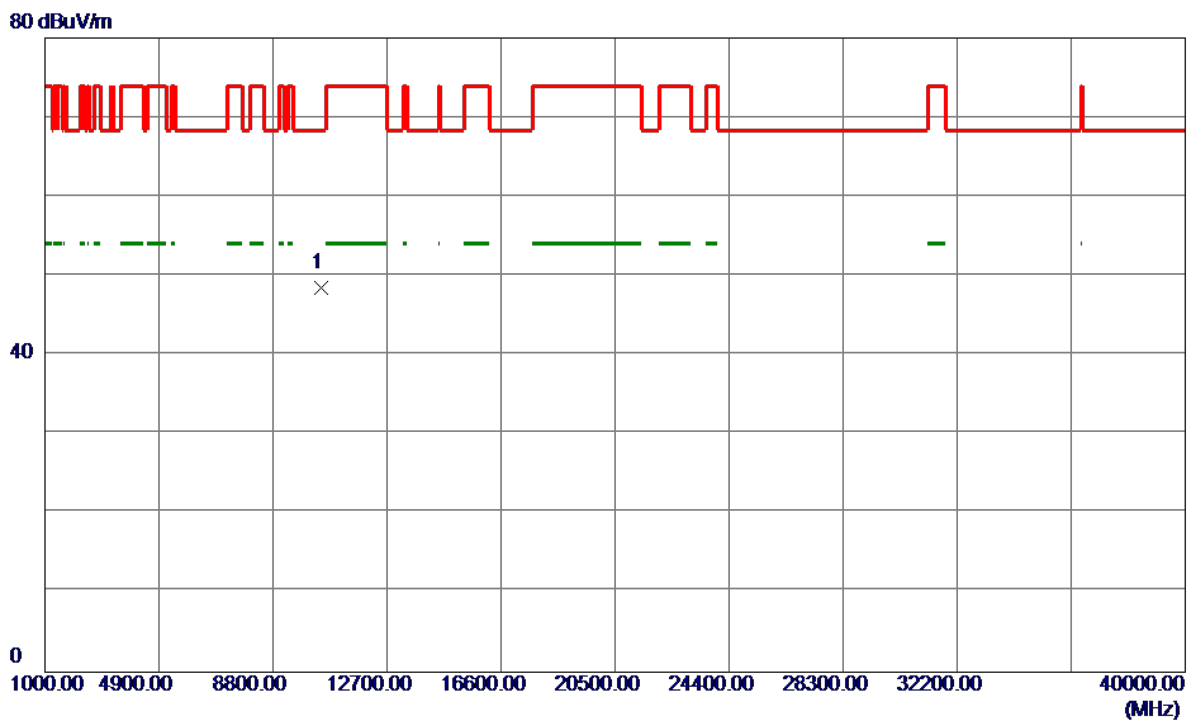


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10462.8200	31.90	16.61	48.51	68.30	-19.79	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

125 dBuV/m

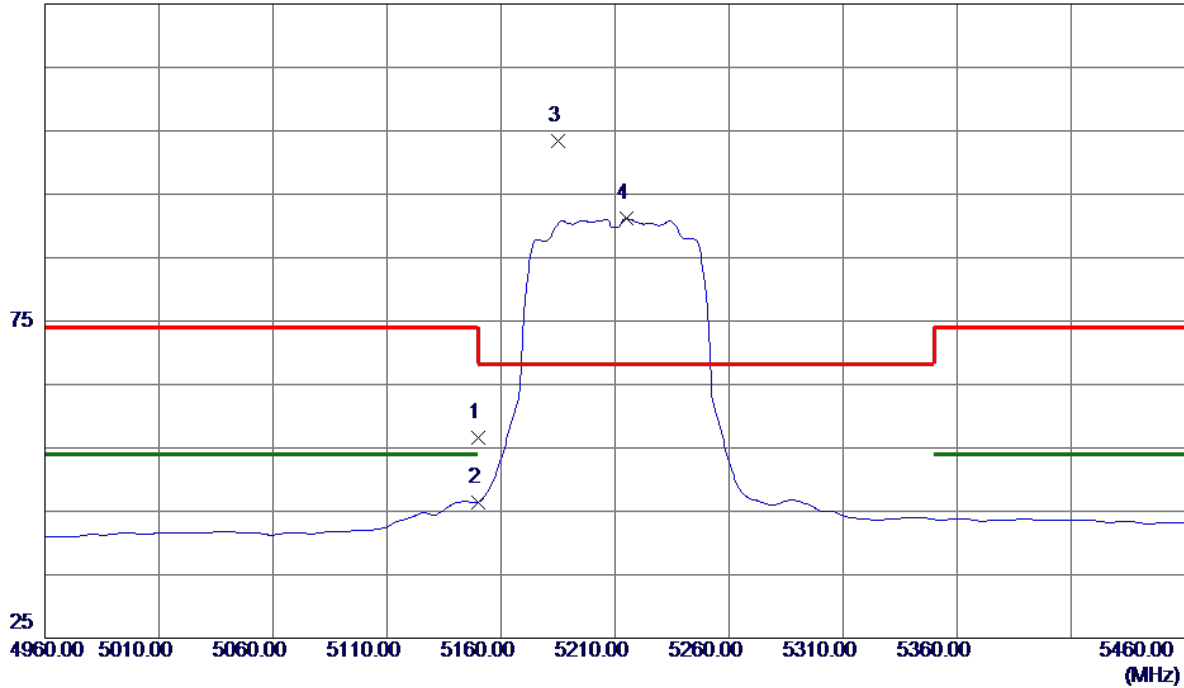


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	15.56	41.10	56.66	74.00	-17.34	Peak	
2	5150.0000	5.39	41.10	46.49	54.00	-7.51	AVG	
3 *	5185.0000	62.06	41.28	103.34	68.30	35.04	Peak	No Limit
4	5215.0000	49.69	41.43	91.12	999.00	-907.88	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

80 dBuV/m

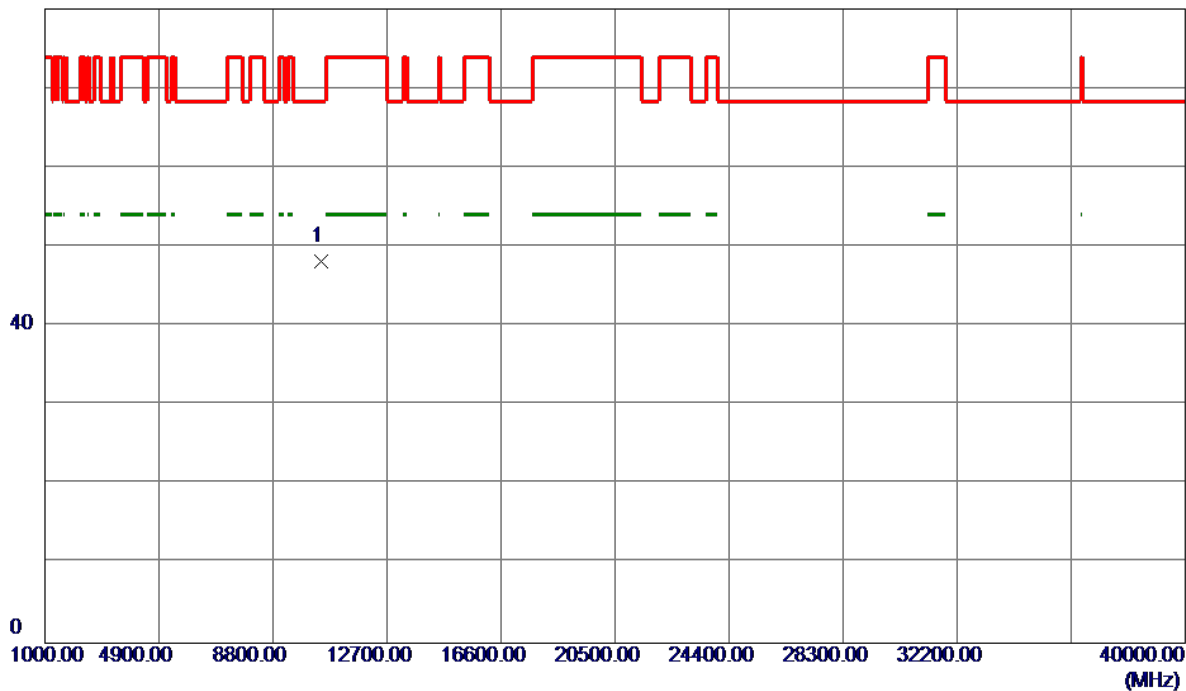


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10427.5800	31.59	16.51	48.10	68.30	-20.20	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal


125 dBuV/m

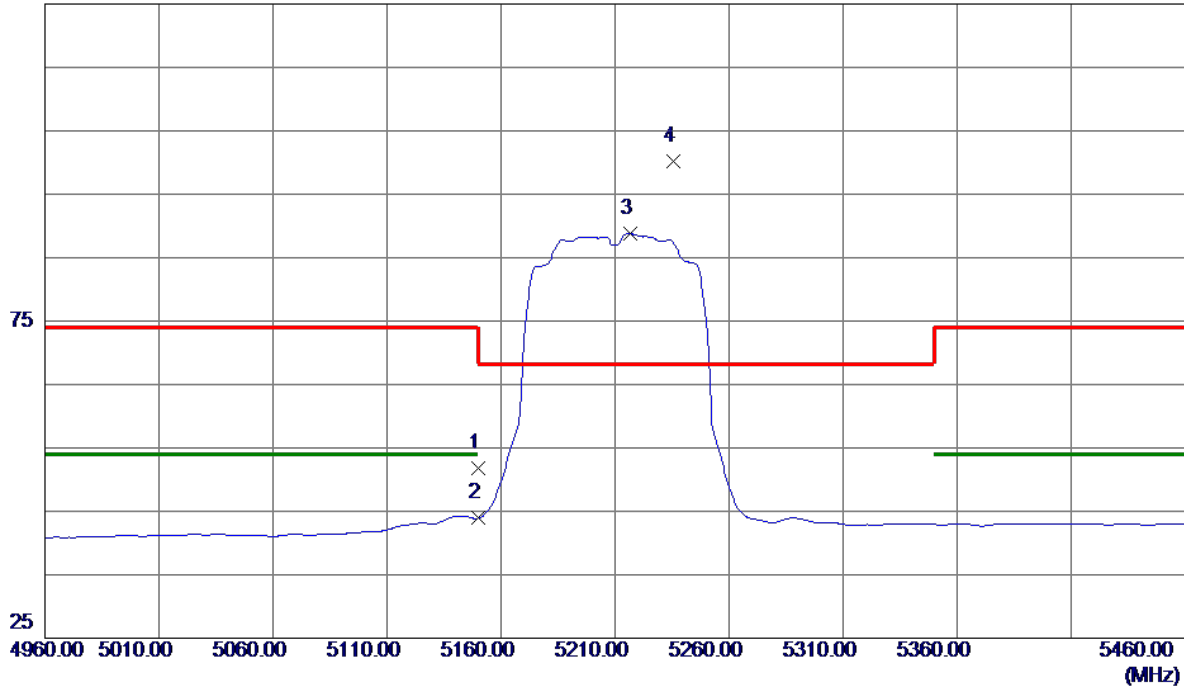

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	10.69	41.10	51.79	74.00	-22.21	Peak	
2	5150.0000	2.81	41.10	43.91	54.00	-10.09	AVG	
3	5216.5000	47.33	41.44	88.77	999.00	-910.23	AVG	No Limit
4 *	5235.5000	58.58	41.54	100.12	68.30	31.82	Peak	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal

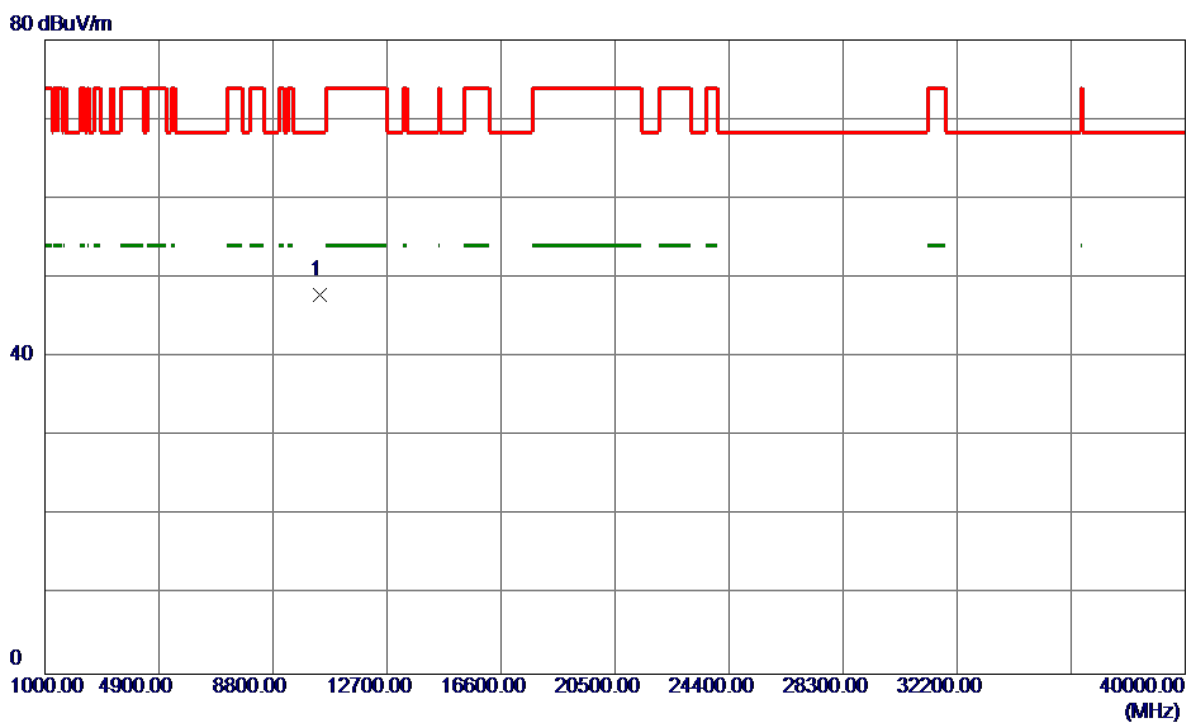


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10411.7400	31.40	16.47	47.87	68.30	-20.43	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC160 Mode 5250MHz

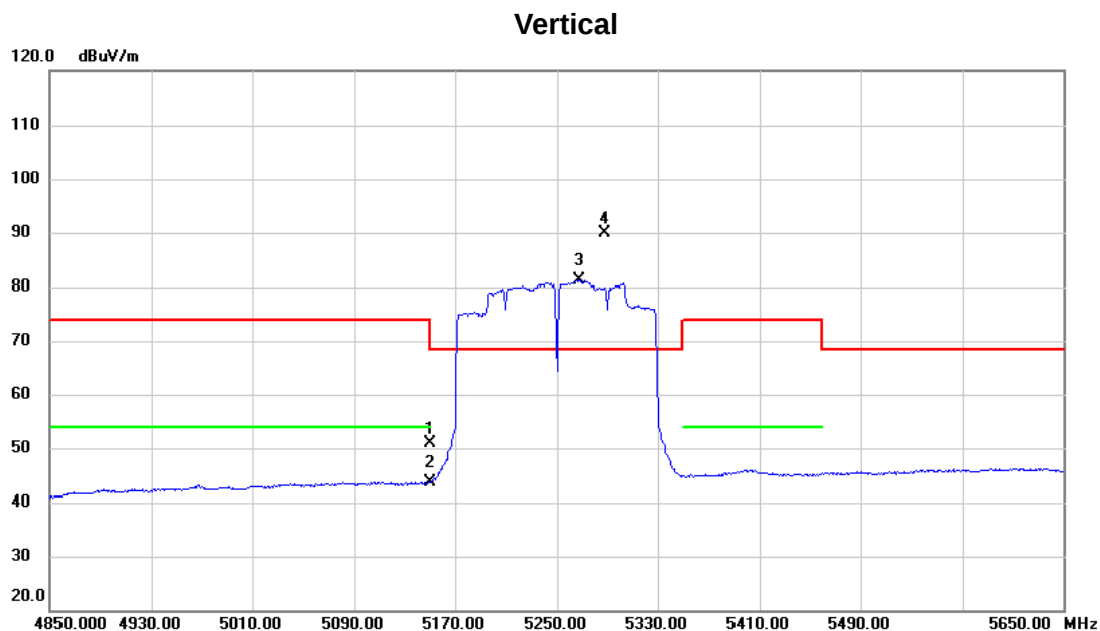


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	32.81	18.19	51.00	74.00	-23.00	peak	
2		5150.000	25.33	18.19	43.52	54.00	-10.48	AVG	
3	X	5267.600	62.26	18.90	81.16	68.30	12.86	AVG	No Limit
4	*	5287.600	70.92	19.03	89.95	68.30	21.65	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC160 Mode 5250MHz

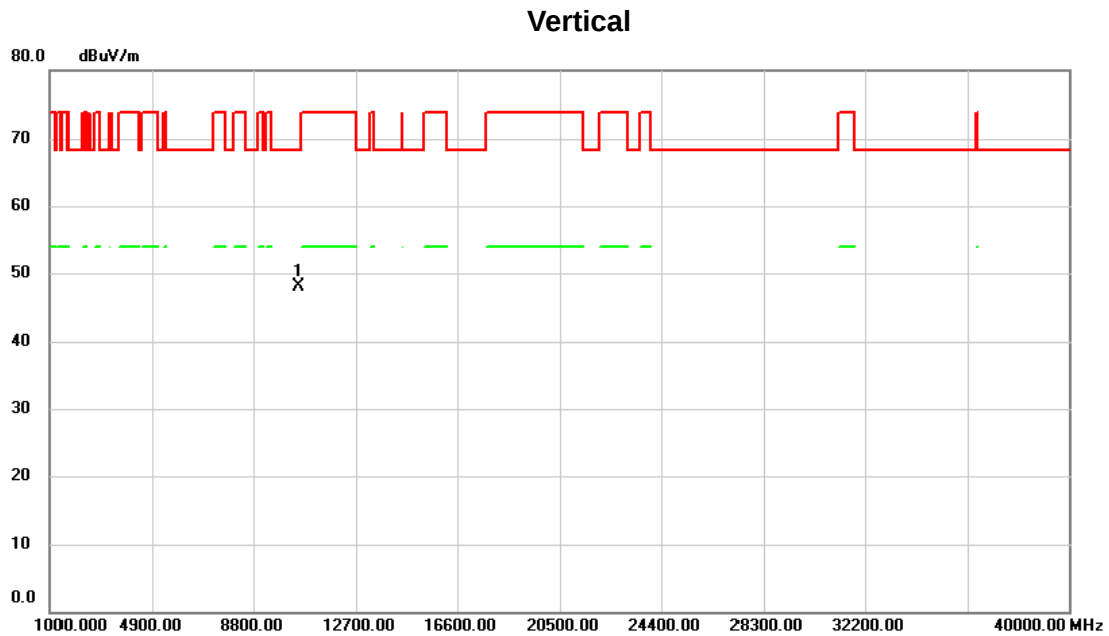


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.660	31.47	16.71	48.18	68.30	-20.12	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC160 Mode 5250MHz

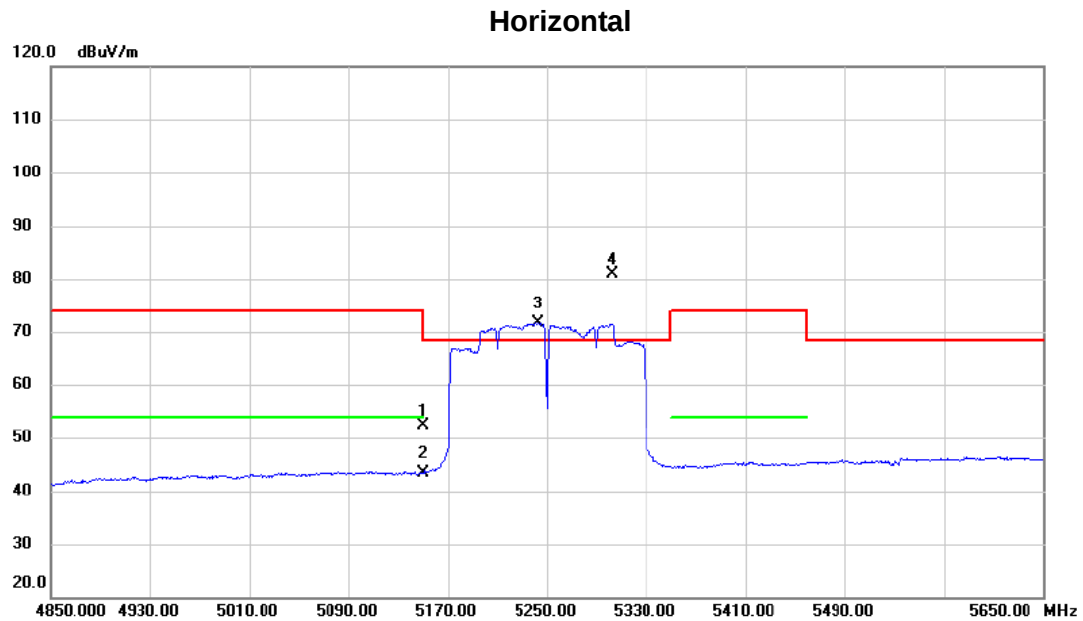

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	34.15	18.19	52.34	74.00	-21.66	peak	
2		5150.000	25.23	18.19	43.42	54.00	-10.58	AVG	
3	X	5242.800	52.78	18.76	71.54	68.30	3.24	AVG	No Limit
4	*	5302.800	61.70	19.12	80.82	68.30	12.52	peak	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC160 Mode 5250MHz

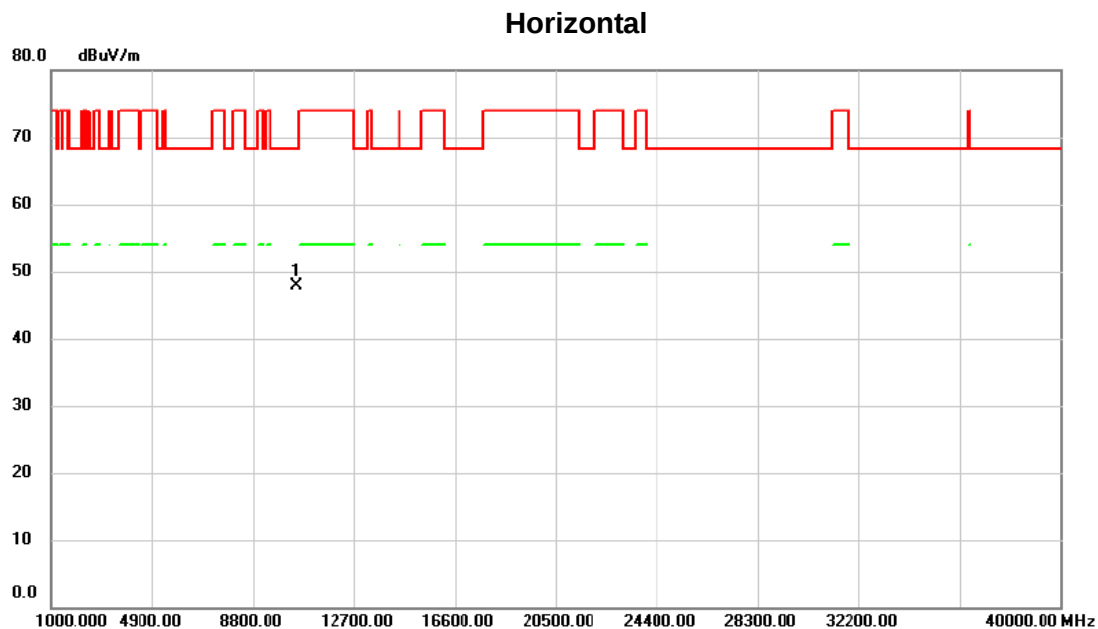

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.320	31.23	16.71	47.94	68.30	-20.36	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Vertical

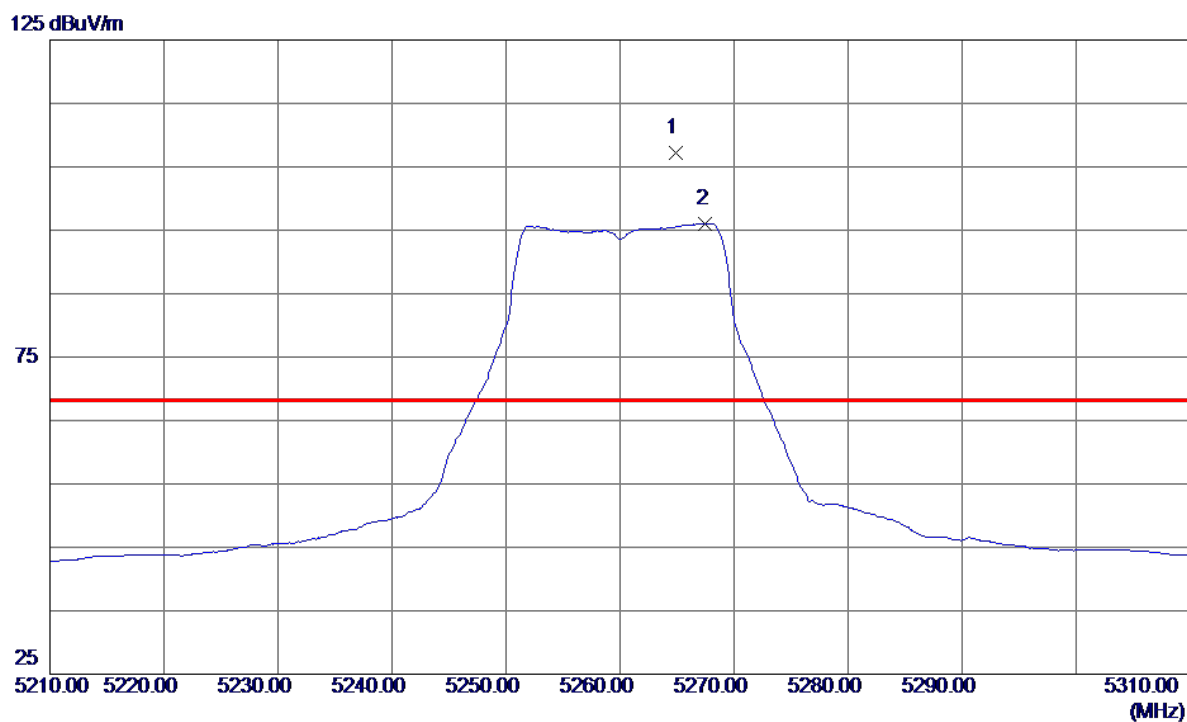

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5264.9000	65.51	41.69	107.20	68.30	38.90	Peak	No Limit
2	5267.5000	54.35	41.70	96.05	999.00	-902.95	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Vertical

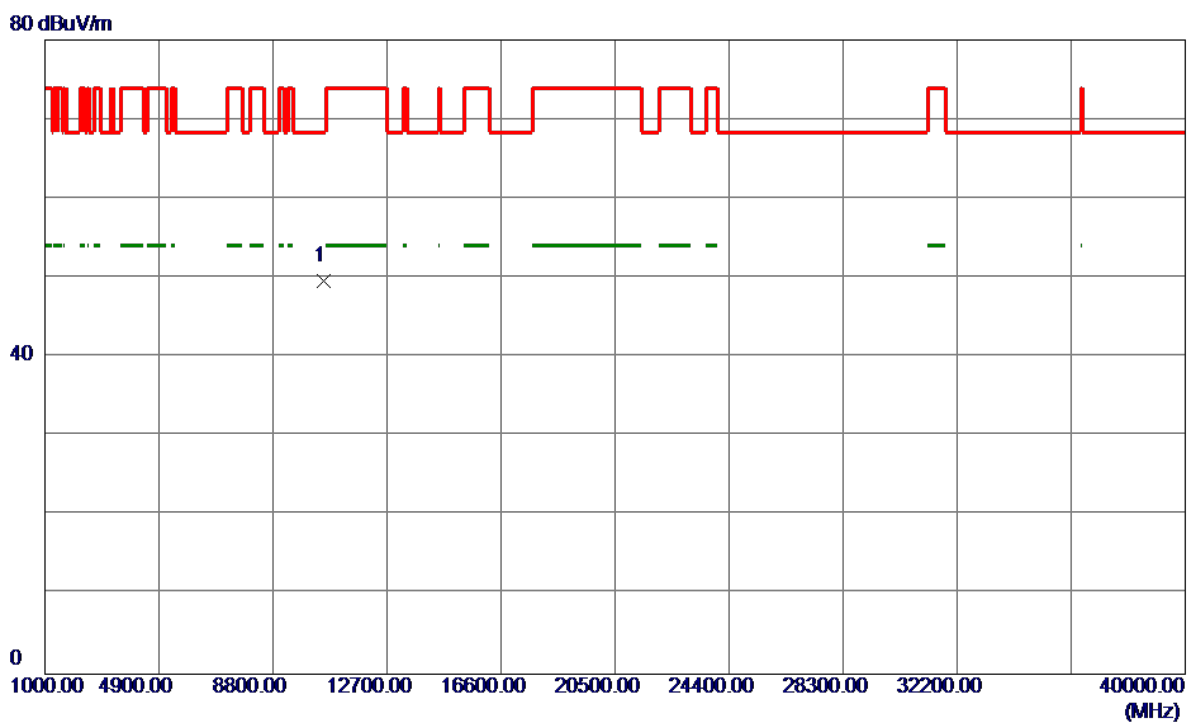

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10525.8600	32.98	16.67	49.65	68.30	-18.65	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Horizontal

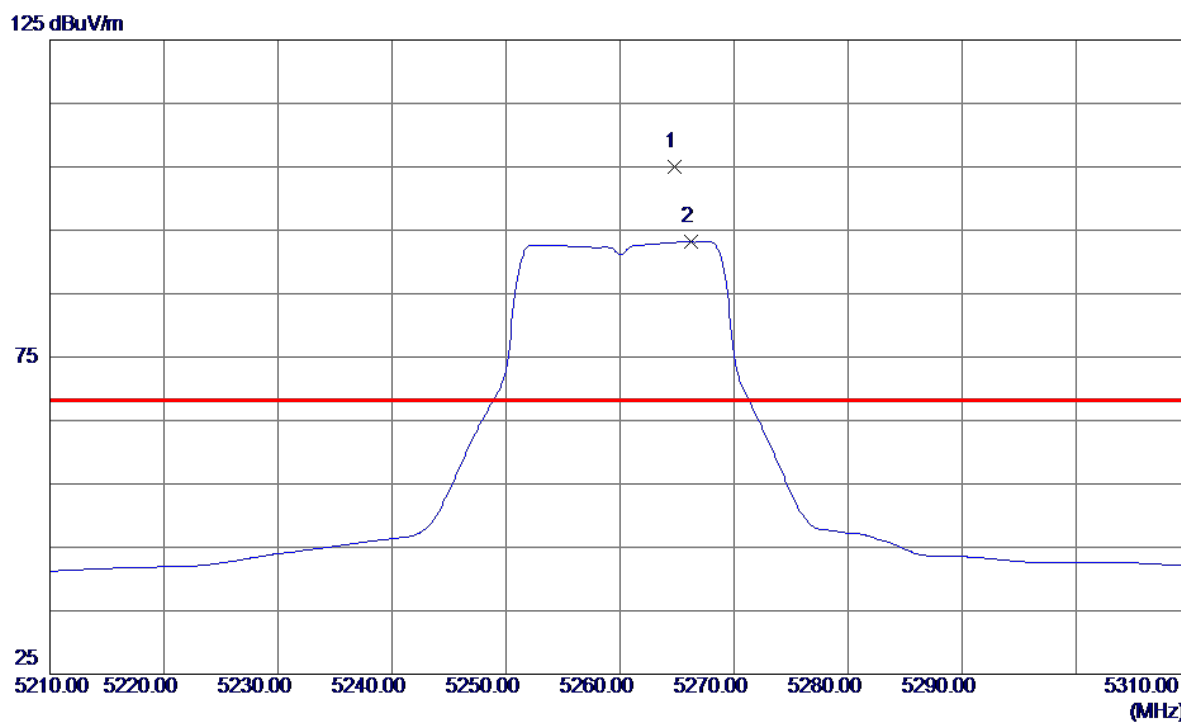

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5264.8000	63.23	41.69	104.92	68.30	36.62	Peak	No Limit
2	5266.2000	51.53	41.69	93.22	999.00	-905.78	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Horizontal

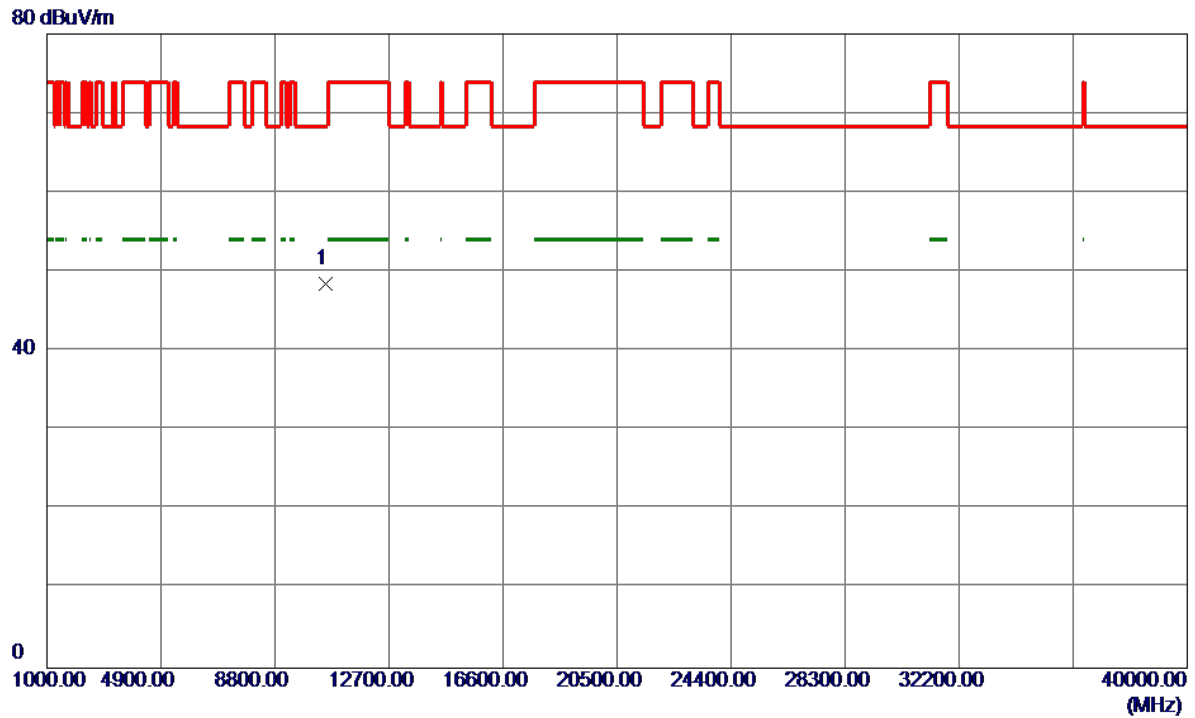

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10526.9800	31.74	16.67	48.41	68.30	-19.89	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz


Vertical

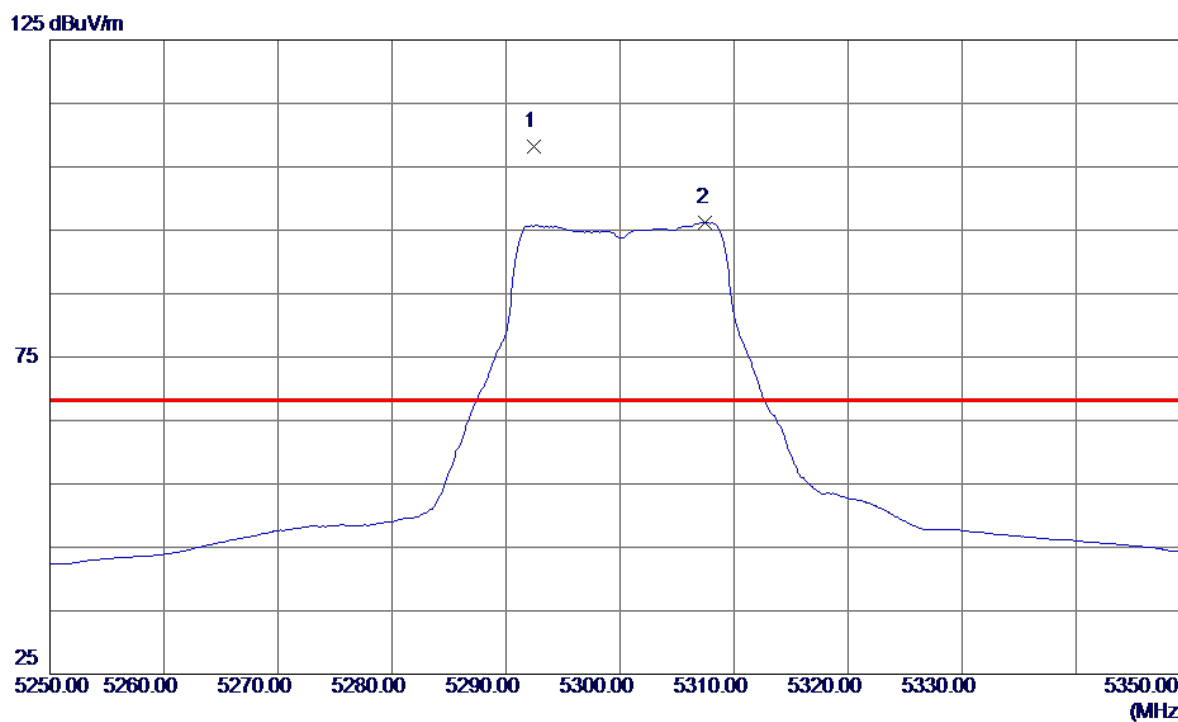

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5292.4000	66.46	41.83	108.29	68.30	39.99	Peak	No Limit
2	5307.5000	54.35	41.90	96.25	999.00	-902.75	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz


Vertical

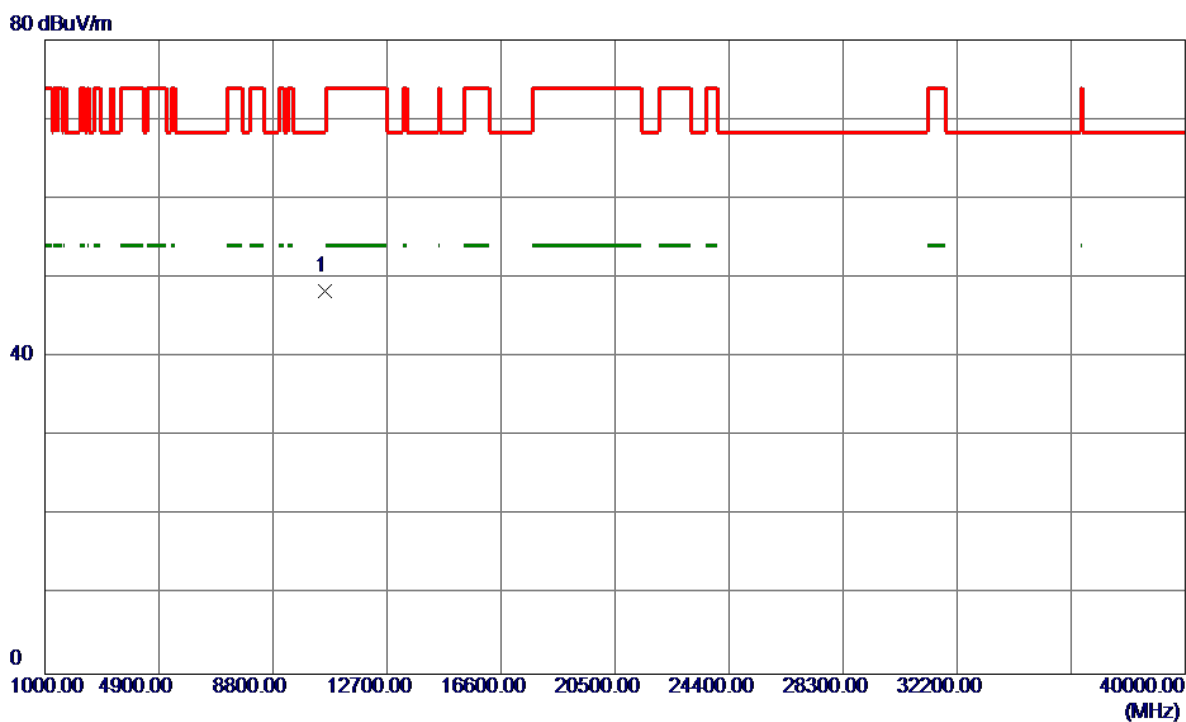

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10591.9400	31.70	16.58	48.28	68.30	-20.02	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Horizontal

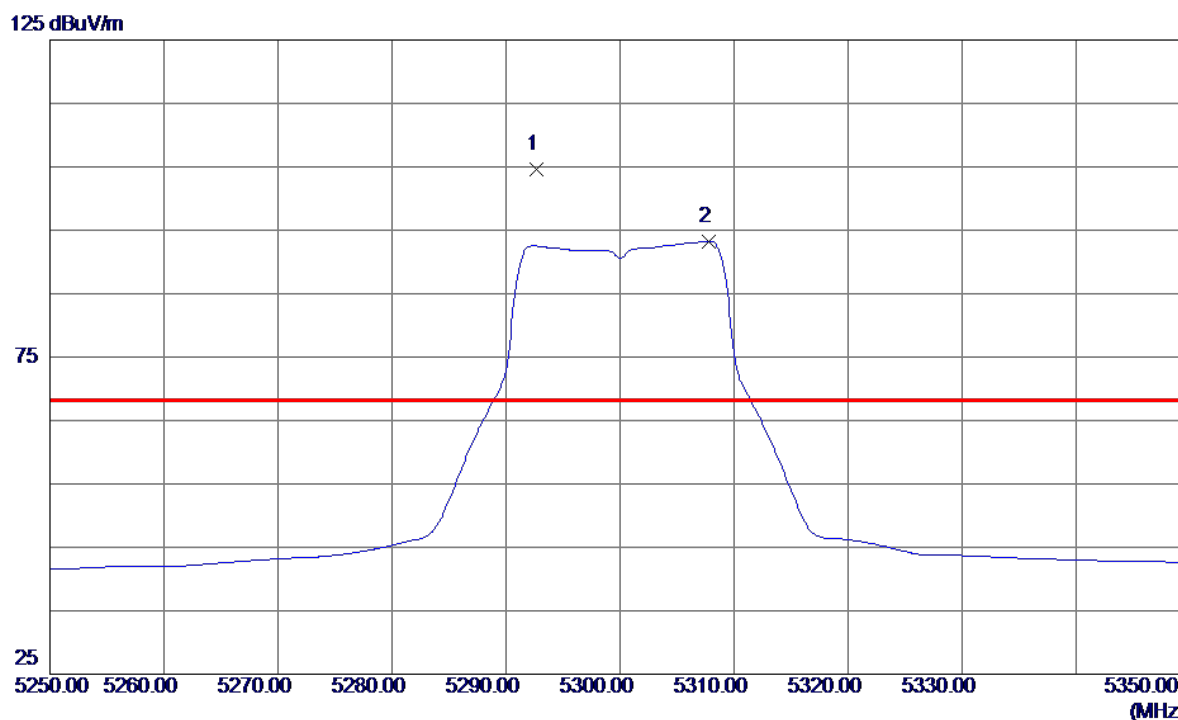


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5292.7000	62.73	41.83	104.56	68.30	36.26	Peak	No Limit
2	5307.8000	51.39	41.90	93.29	999.00	-905.71	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz

Horizontal


80 dBuV/m

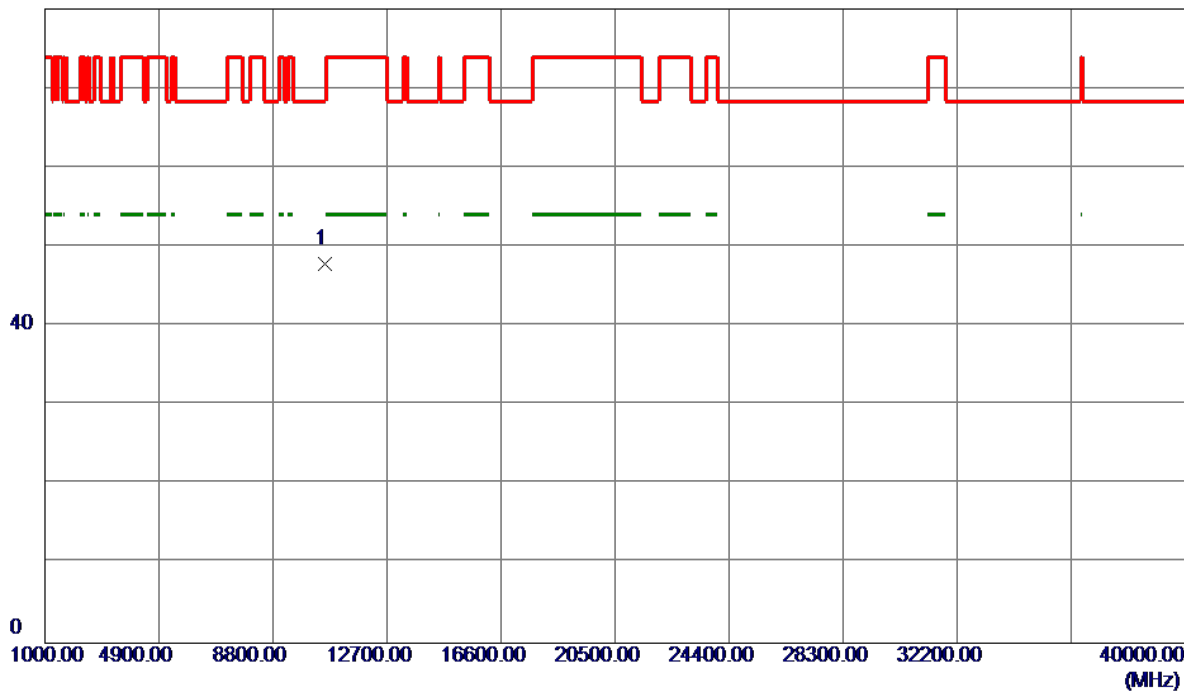

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10598.3000	31.21	16.57	47.78	68.30	-20.52	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Vertical

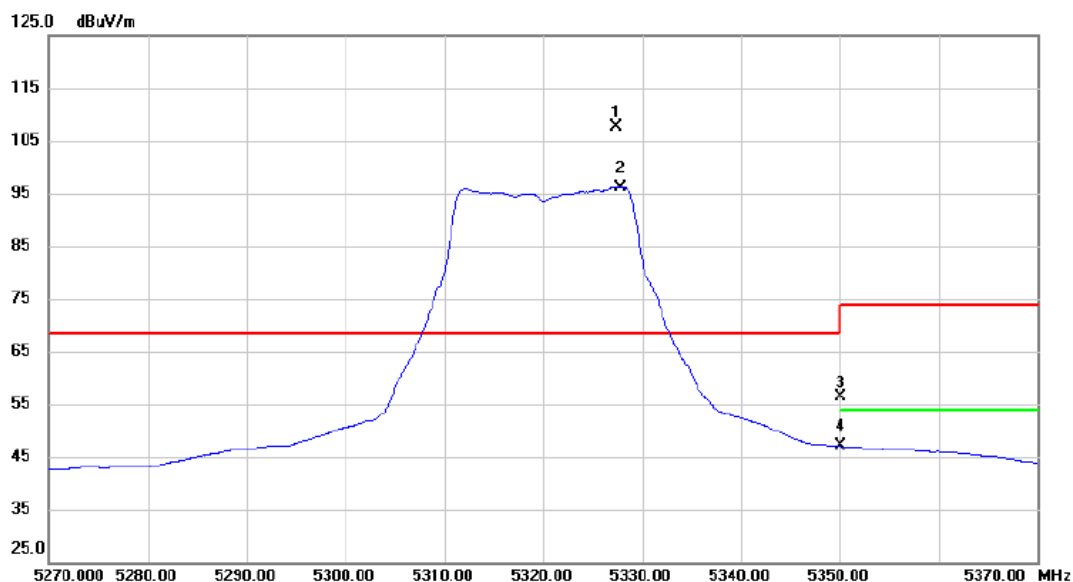

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5327.400	65.75	42.00	107.75	68.30	39.45	peak	No Limit
2	X	5327.800	54.17	42.00	96.17	68.30	27.87	AVG	No Limit
3		5350.000	14.36	42.12	56.48	74.00	-17.52	peak	
4		5350.000	4.92	42.12	47.04	54.00	-6.96	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Vertical

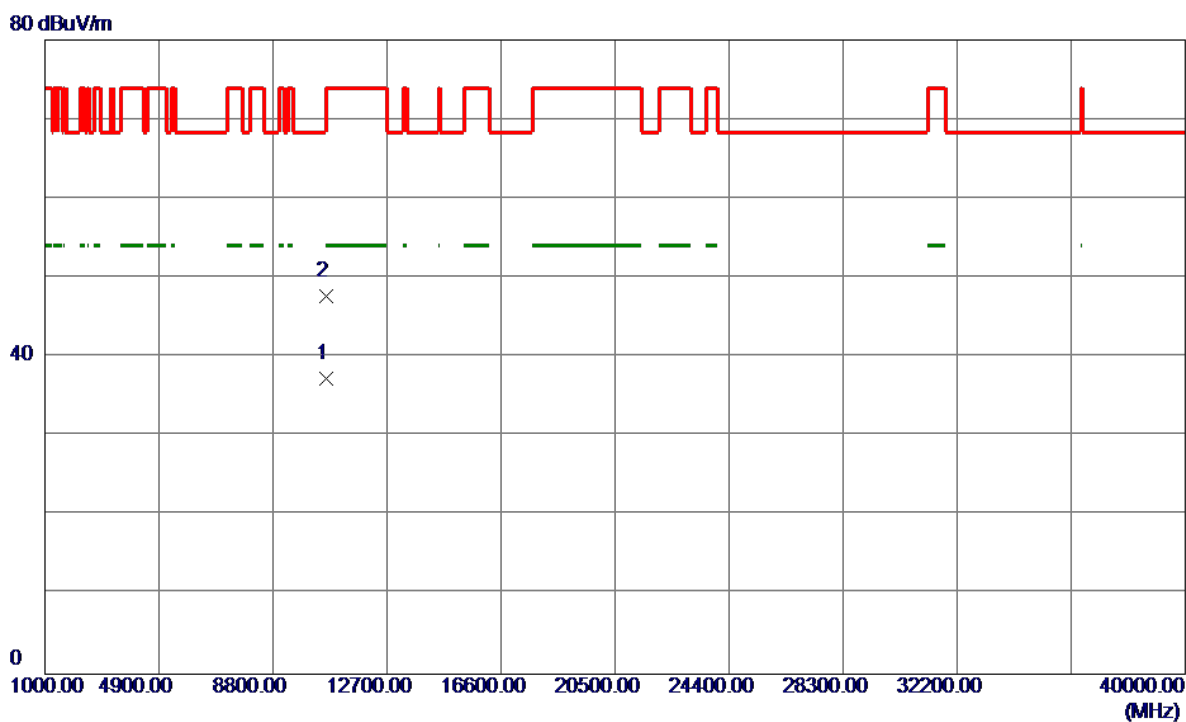

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10634.9800	20.79	16.52	37.31	54.00	-16.69	AVG	
2	10639.9800	31.10	16.52	47.62	74.00	-26.38	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Horizontal

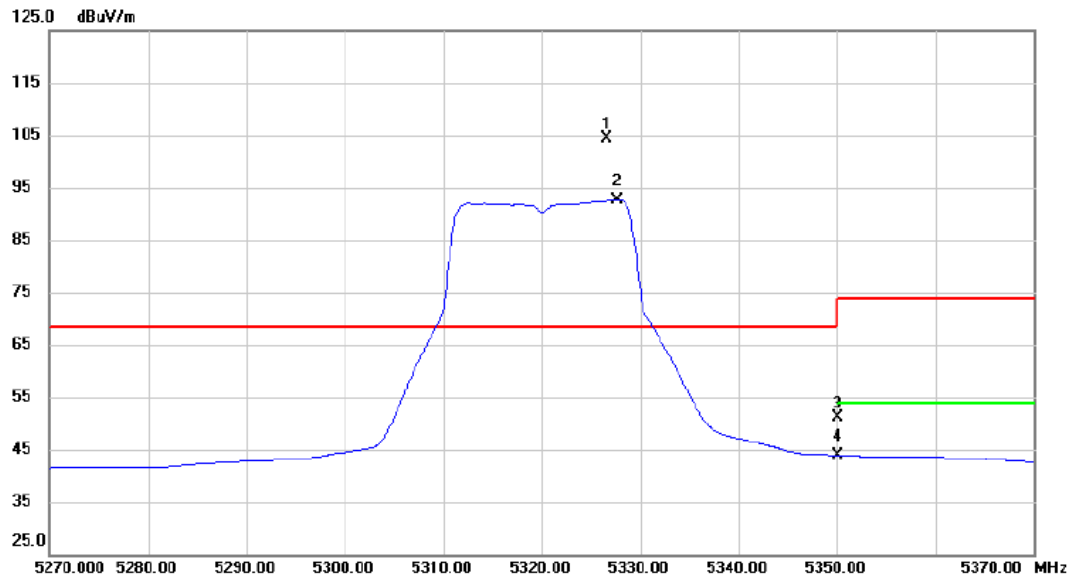

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5326.600	62.50	42.00	104.50	68.30	36.20	peak	No Limit
2	X	5327.700	50.72	42.00	92.72	68.30	24.42	AVG	No Limit
3		5350.000	9.13	42.12	51.25	74.00	-22.75	peak	
4		5350.000	1.81	42.12	43.93	54.00	-10.07	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Horizontal

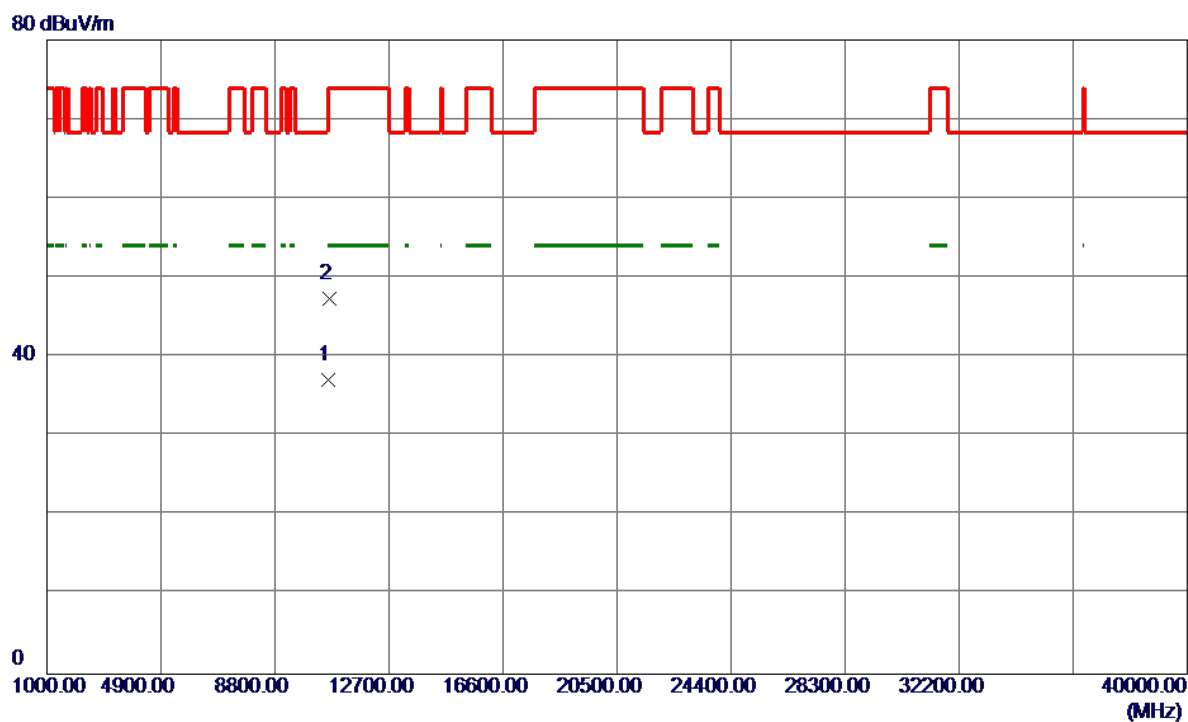

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10632.9600	20.62	16.53	37.15	54.00	-16.85	AVG	
2	10646.3000	30.88	16.51	47.39	74.00	-26.61	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Vertical

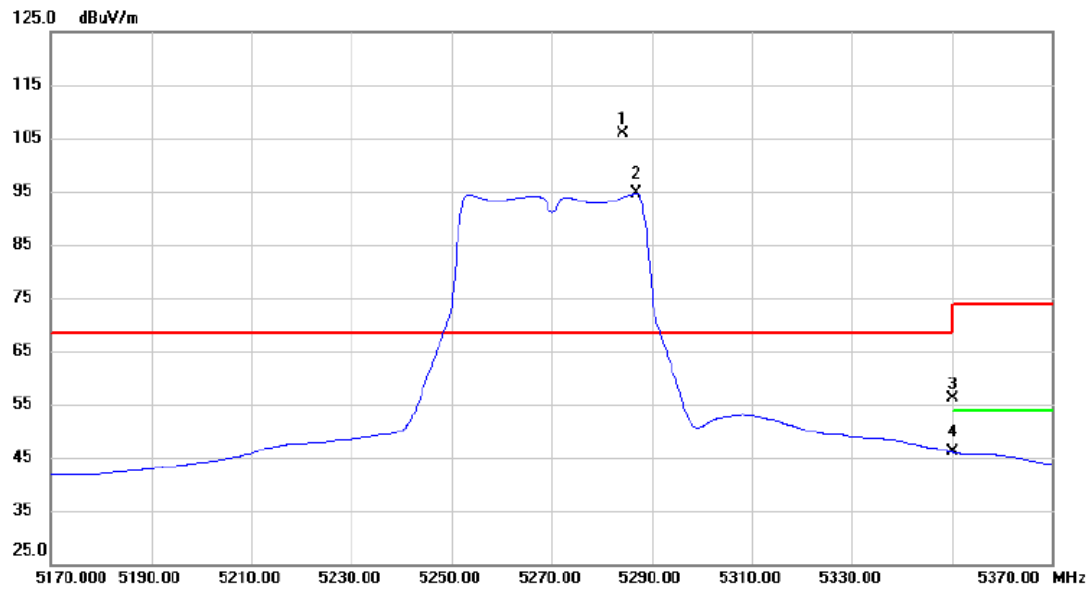

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5284.200	64.16	41.78	105.94	68.30	37.64	peak	No Limit
2	X	5287.000	52.92	41.80	94.72	68.30	26.42	AVG	No Limit
3		5350.000	14.09	42.12	56.21	74.00	-17.79	peak	
4		5350.000	3.91	42.12	46.03	54.00	-7.97	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Vertical

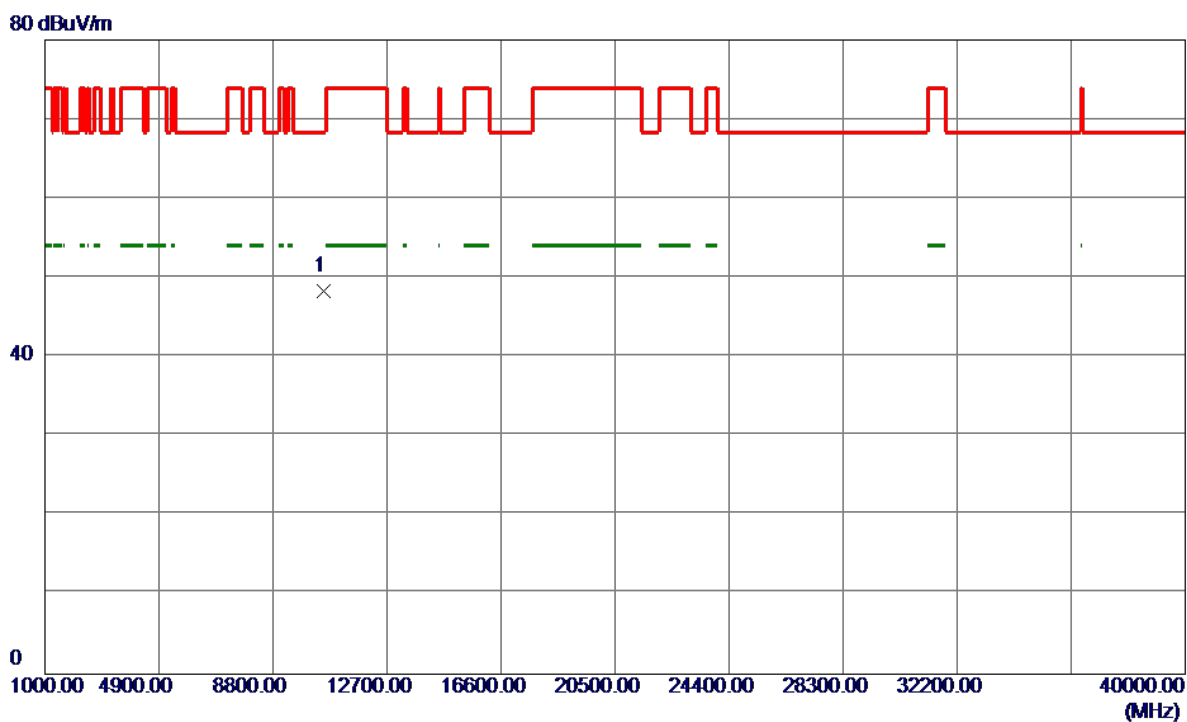

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10540.6600	31.68	16.65	48.33	68.30	-19.97	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Horizontal

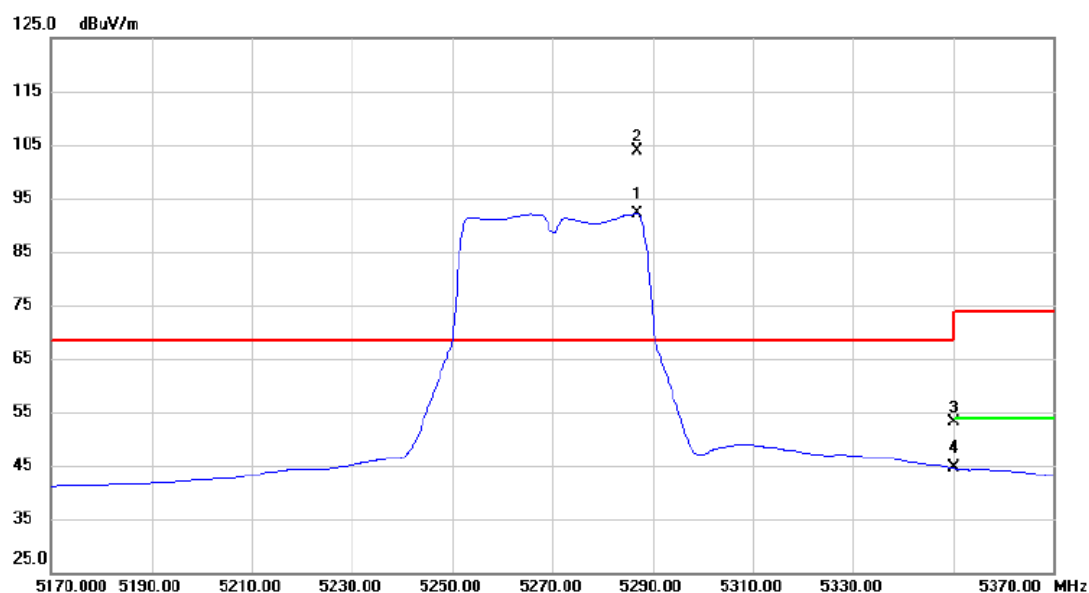

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5286.800	50.34	41.80	92.14	68.30	23.84	AVG	No Limit
2	*	5287.000	62.12	41.80	103.92	68.30	35.62	peak	No Limit
3		5350.000	11.03	42.12	53.15	74.00	-20.85	peak	
4		5350.000	2.42	42.12	44.54	54.00	-9.46	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal

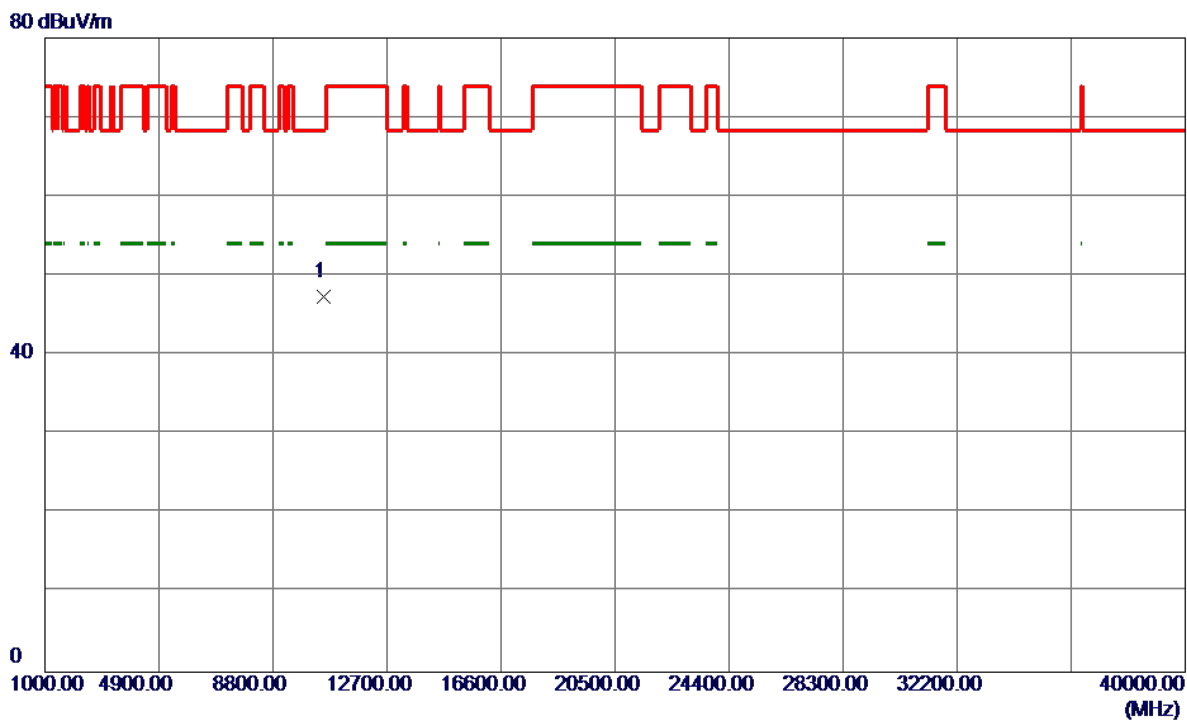

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10537.3000	30.77	16.65	47.42	68.30	-20.88	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

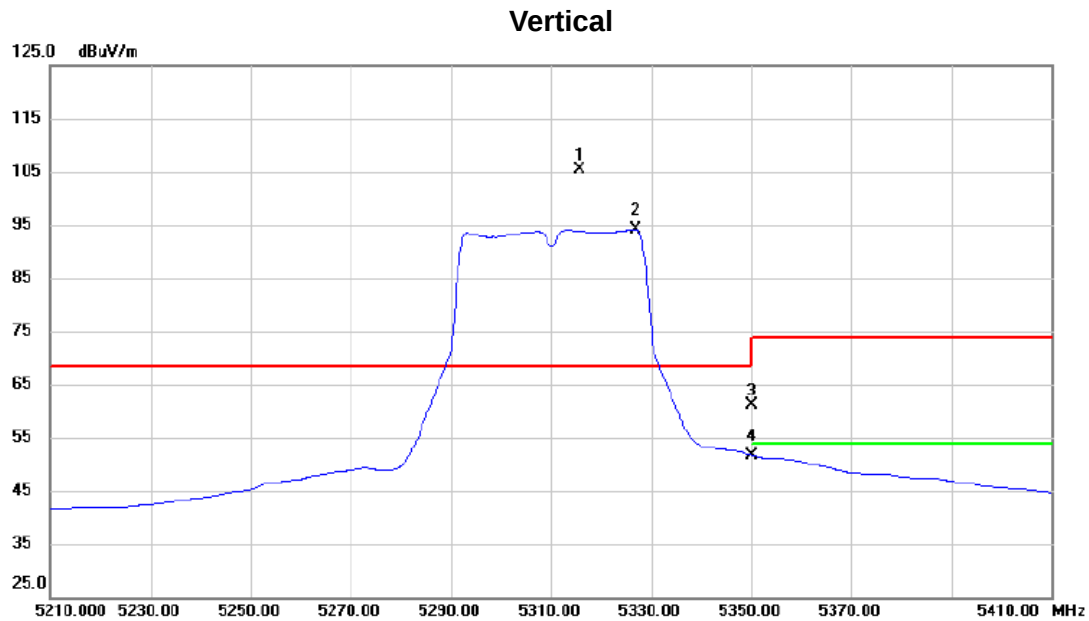


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5315.600	63.52	41.94	105.46	68.30	37.16	peak	No Limit
2	X	5327.000	52.24	42.00	94.24	68.30	25.94	AVG	No Limit
3		5350.000	18.98	42.12	61.10	74.00	-12.90	peak	
4		5350.000	9.62	42.12	51.74	54.00	-2.26	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


Vertical

80 dBuV/m

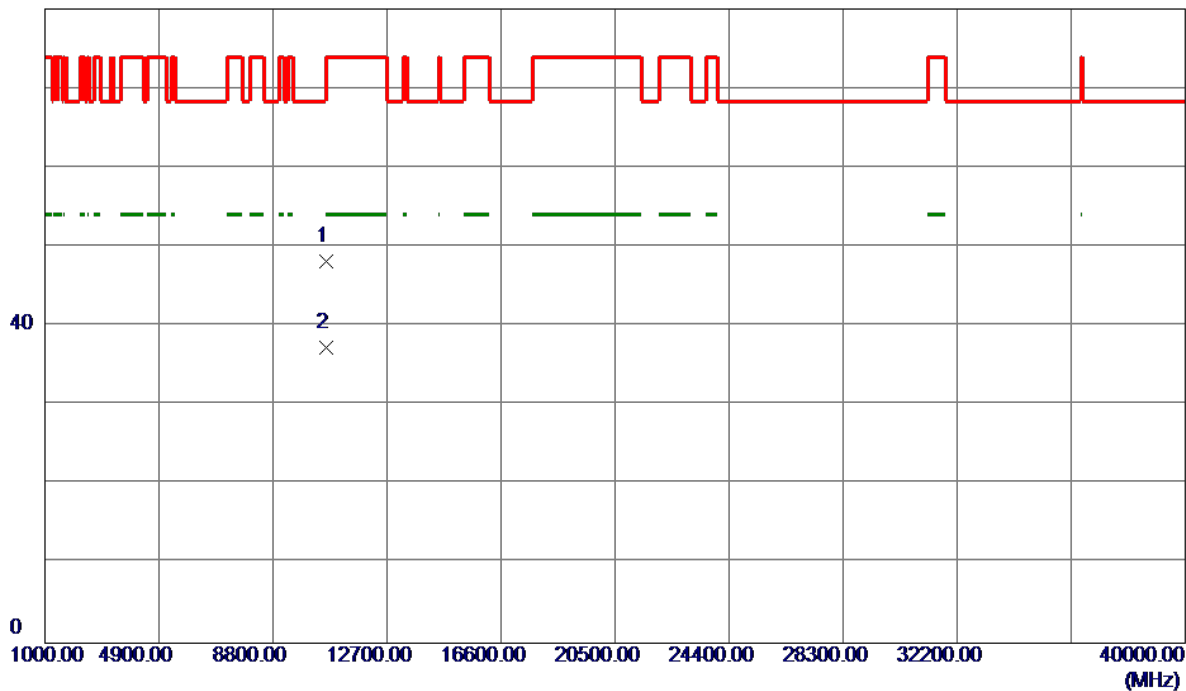

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10624.2200	31.66	16.54	48.20	74.00	-25.80	Peak	
2 *	10625.8600	20.76	16.54	37.30	54.00	-16.70	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

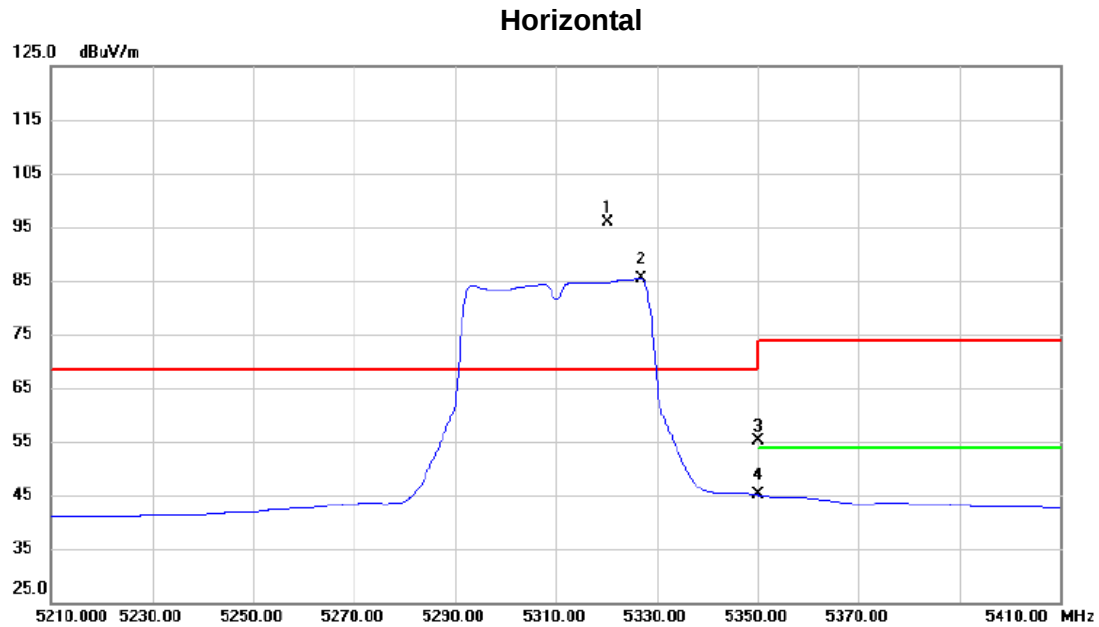

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5320.400	53.95	41.97	95.92	68.30	27.62	peak	No Limit
2	X	5327.000	43.34	42.00	85.34	68.30	17.04	AVG	No Limit
3		5350.000	12.99	42.12	55.11	74.00	-18.89	peak	
4		5350.000	2.89	42.12	45.01	54.00	-8.99	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Horizontal

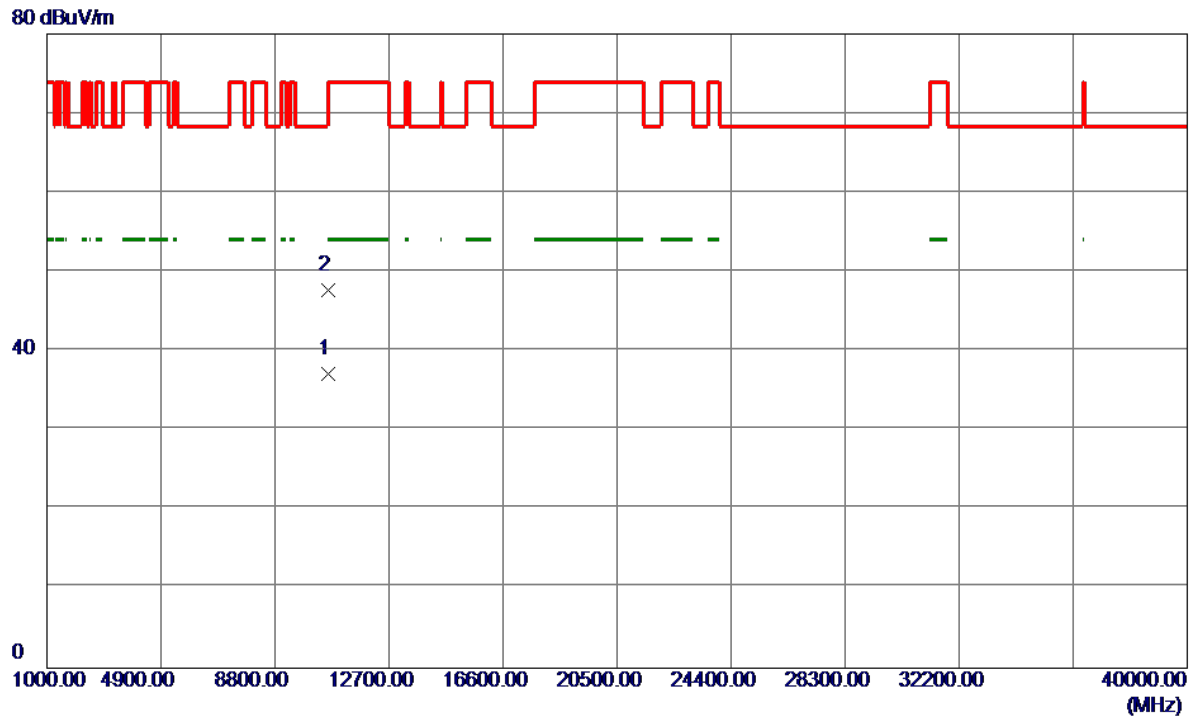

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10610.0199	20.53	16.56	37.09	54.00	-16.91	AVG	
2	10619.6000	31.09	16.54	47.63	74.00	-26.37	Peak	


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

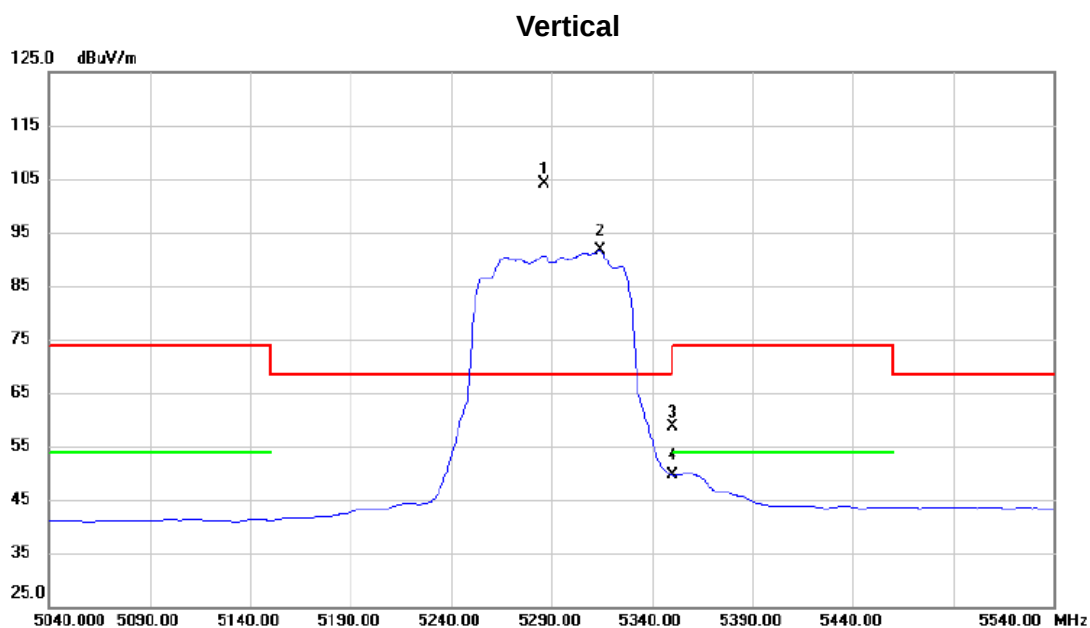

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5286.500	62.24	41.79	104.03	68.30	35.73	peak	No Limit
2	X	5314.000	49.61	41.93	91.54	68.30	23.24	AVG	No Limit
3		5350.000	16.63	42.12	58.75	74.00	-15.25	peak	
4		5350.000	7.45	42.12	49.57	54.00	-4.43	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Vertical

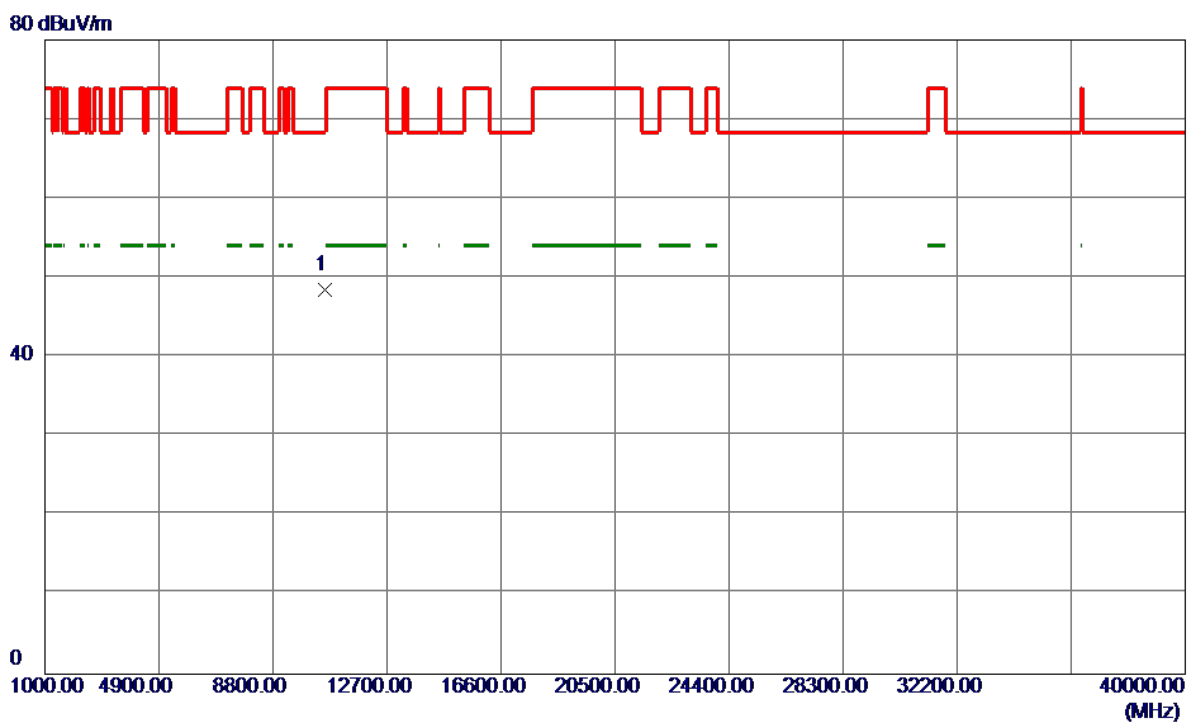

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10573.4400	31.83	16.61	48.44	68.30	-19.86	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Horizontal

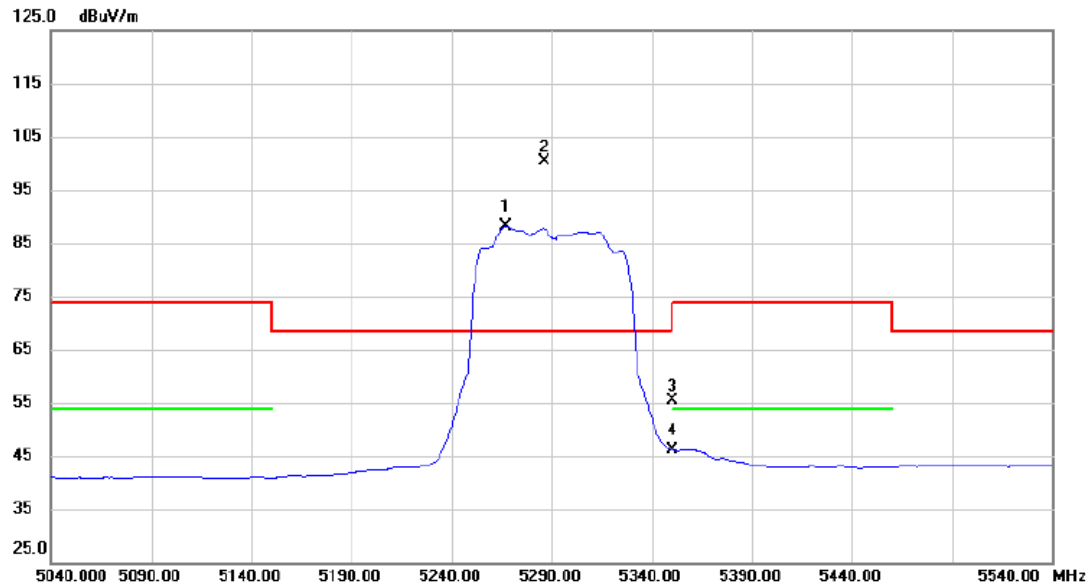

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5267.000	46.55	41.69	88.24	68.30	19.94	AVG	No Limit
2	*	5286.000	58.53	41.79	100.32	68.30	32.02	peak	No Limit
3		5350.000	13.22	42.12	55.34	74.00	-18.66	peak	
4		5350.000	4.02	42.12	46.14	54.00	-7.86	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal

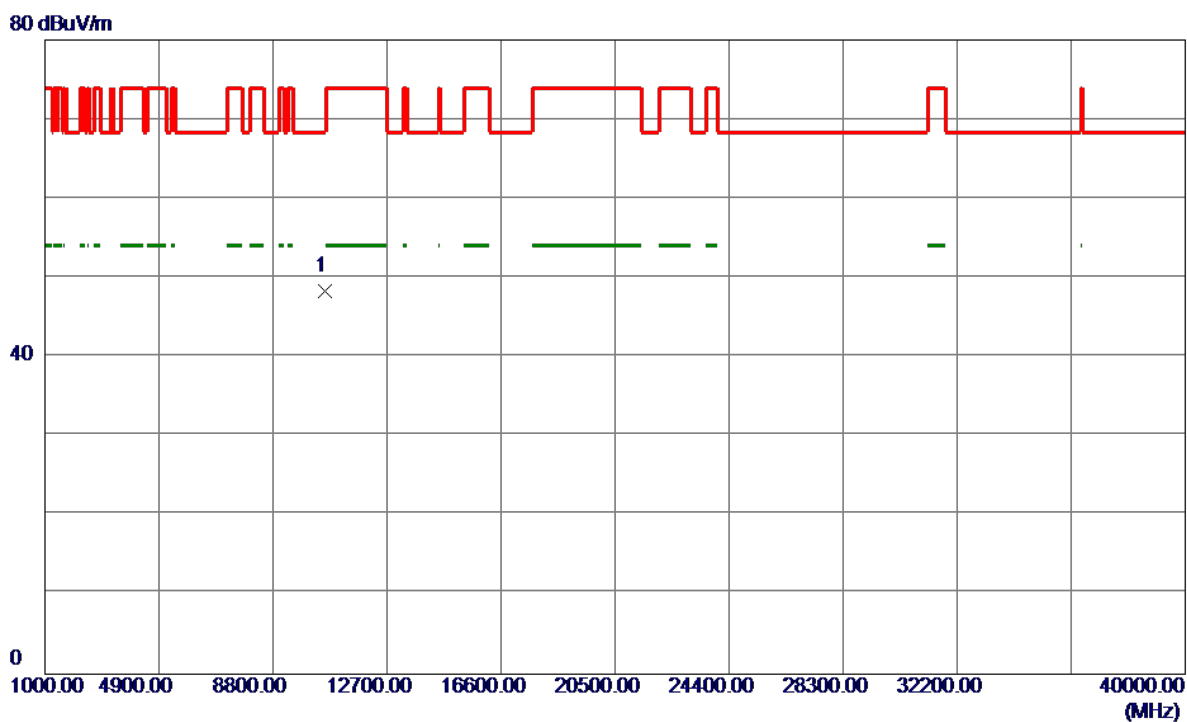


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10575.3600	31.75	16.60	48.35	68.30	-19.95	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Vertical


125 dBuV/m

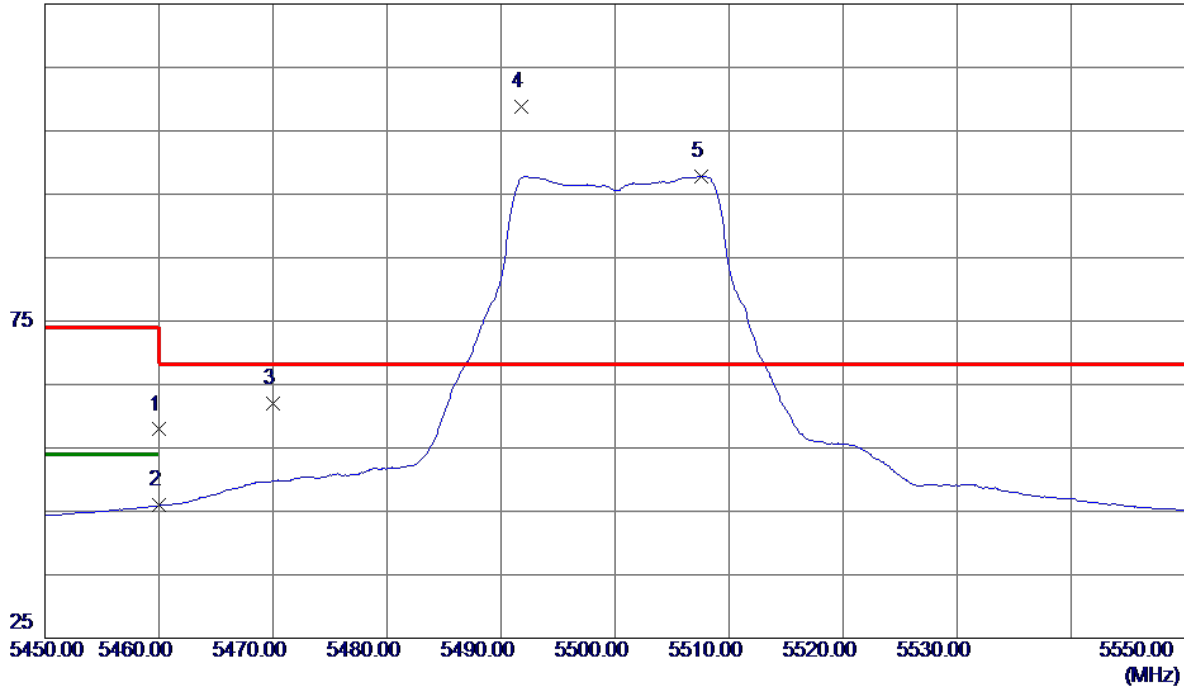

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	15.22	42.68	57.90	74.00	-16.10	Peak	
2	5460.0000	3.23	42.68	45.91	54.00	-8.09	AVG	
3	5470.0000	19.20	42.73	61.93	68.30	-6.37	Peak	
4 *	5491.8000	65.98	42.84	108.82	68.30	40.52	Peak	No Limit
5	5507.6000	54.99	42.90	97.89	999.00	-901.11	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Vertical

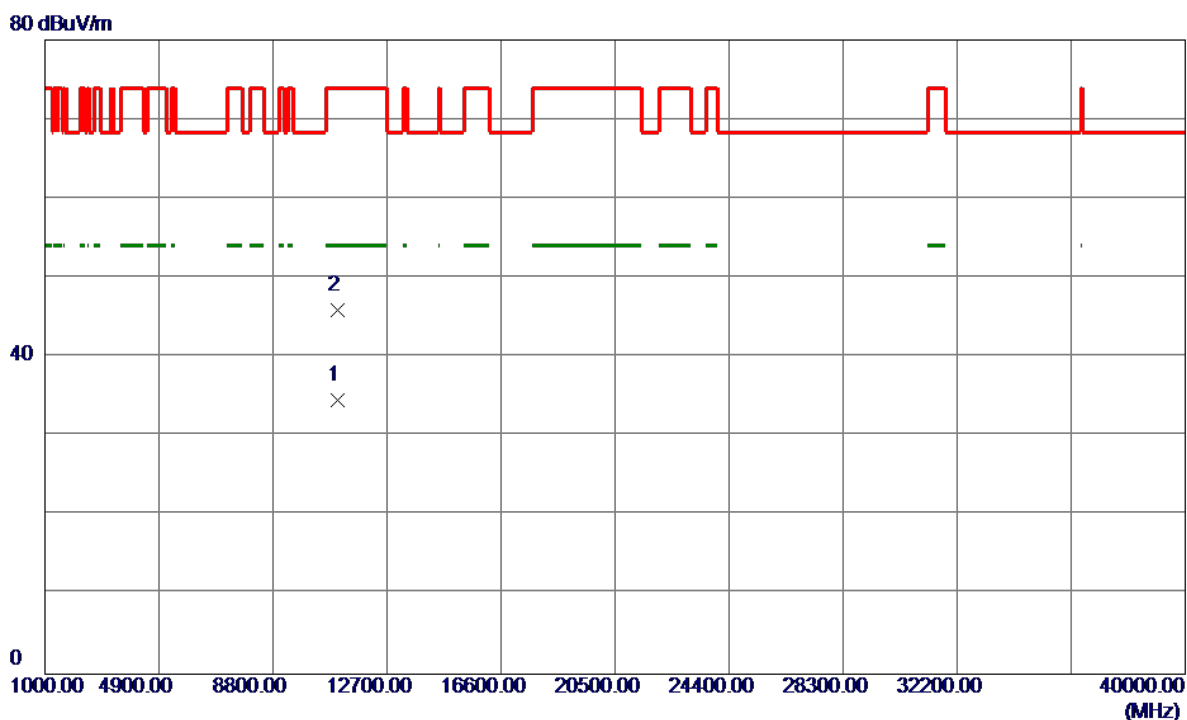


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10993.5400	18.49	16.04	34.53	54.00	-19.47	AVG	
2	10996.0199	29.94	16.04	45.98	74.00	-28.02	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Horizontal


125 dBuV/m

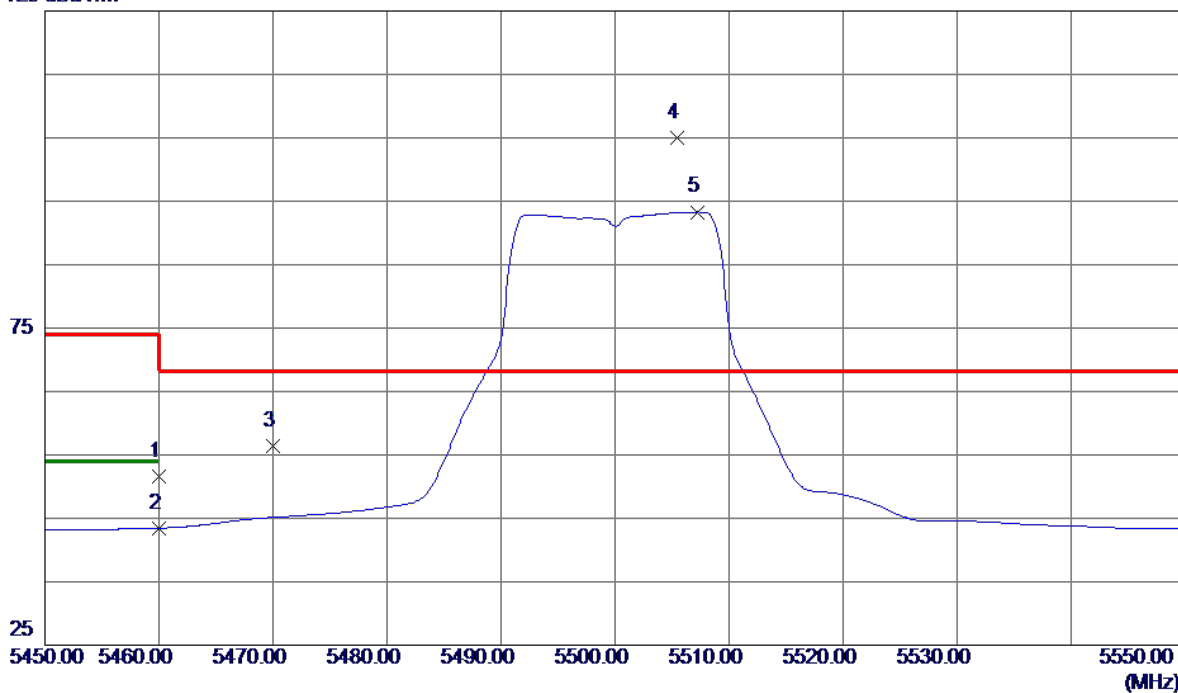

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	8.96	42.68	51.64	74.00	-22.36	Peak	
2	5460.0000	0.78	42.68	43.46	54.00	-10.54	AVG	
3	5470.0000	13.67	42.73	56.40	68.30	-11.90	Peak	
4 *	5505.4000	62.08	42.90	104.98	68.30	36.68	Peak	No Limit
5	5507.2000	50.40	42.90	93.30	999.00	-905.70	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Horizontal

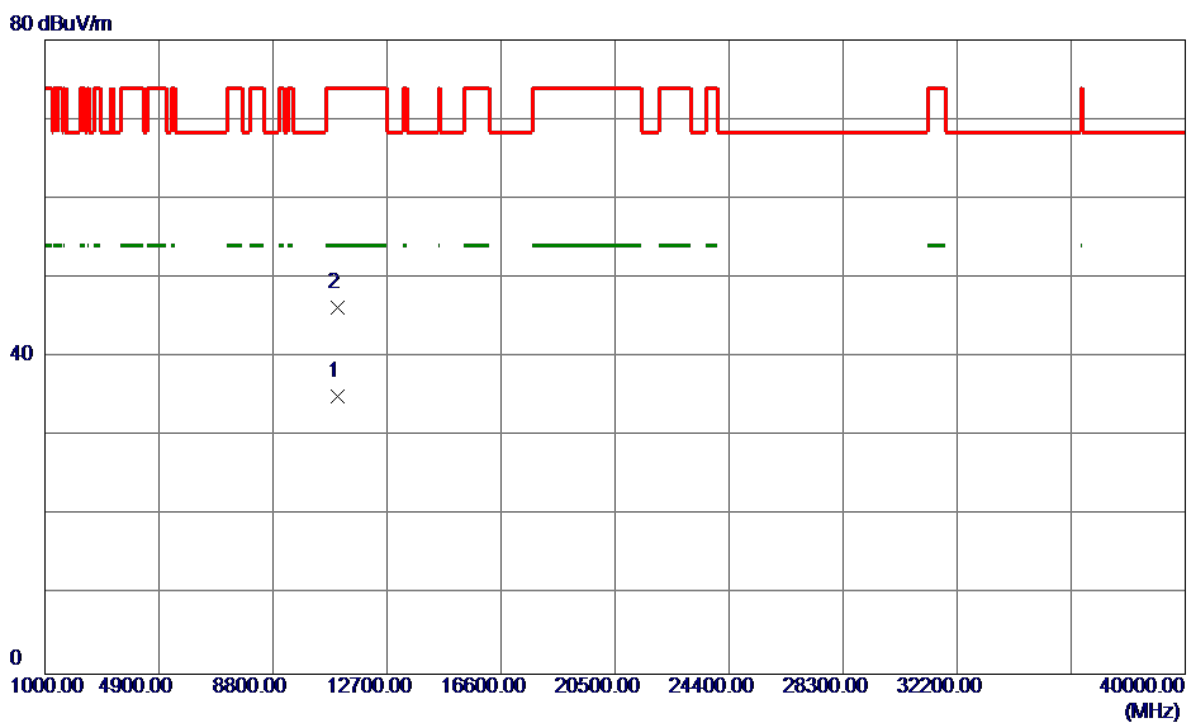


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10992.5400	19.03	16.04	35.07	54.00	-18.93	AVG	
2	10994.1200	30.16	16.04	46.20	74.00	-27.80	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Vertical

125 dBuV/m

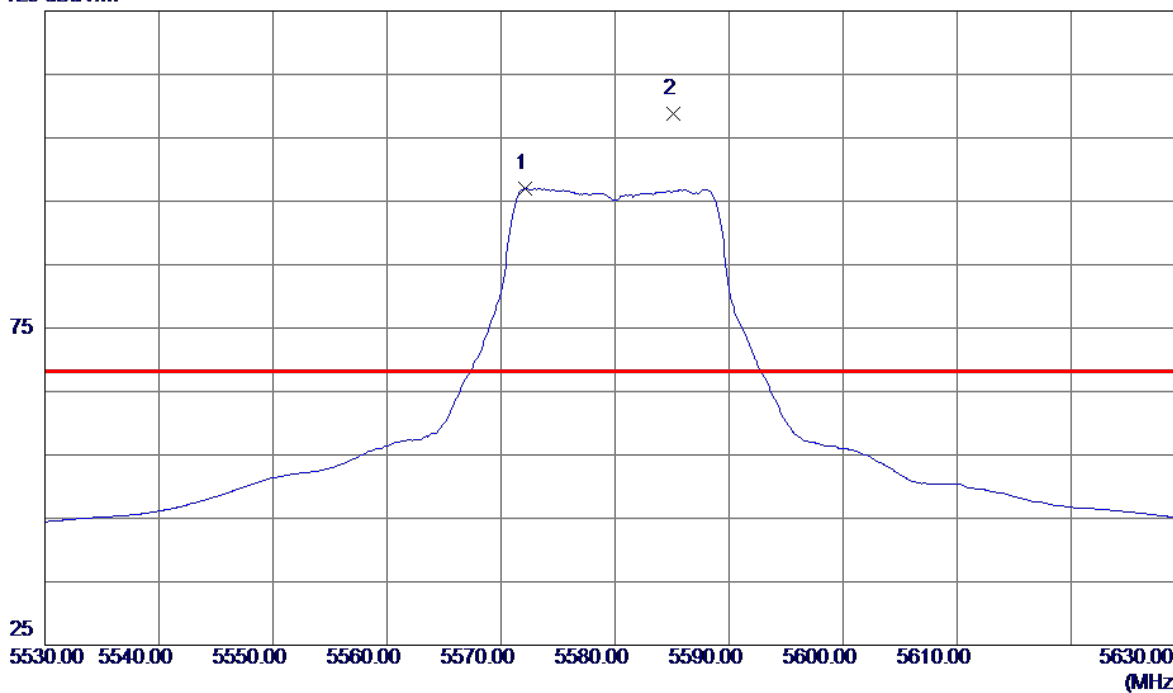


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5572.1000	53.90	43.10	97.00	999.00	-902.00	AVG	No Limit
2 *	5585.1000	65.56	43.14	108.70	68.30	40.40	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Vertical

80 dBuV/m

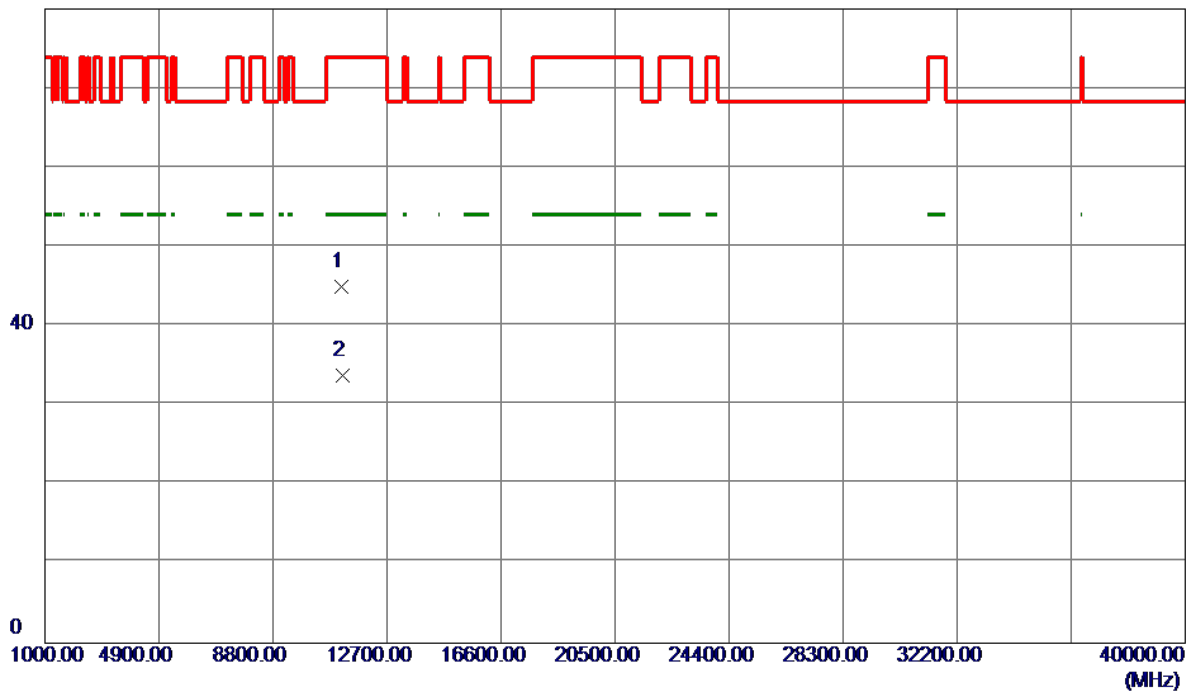


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.7800	28.44	16.59	45.03	74.00	-28.97	Peak	
2 *	11162.9000	17.12	16.60	33.72	54.00	-20.28	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Horizontal


125 dBuV/m

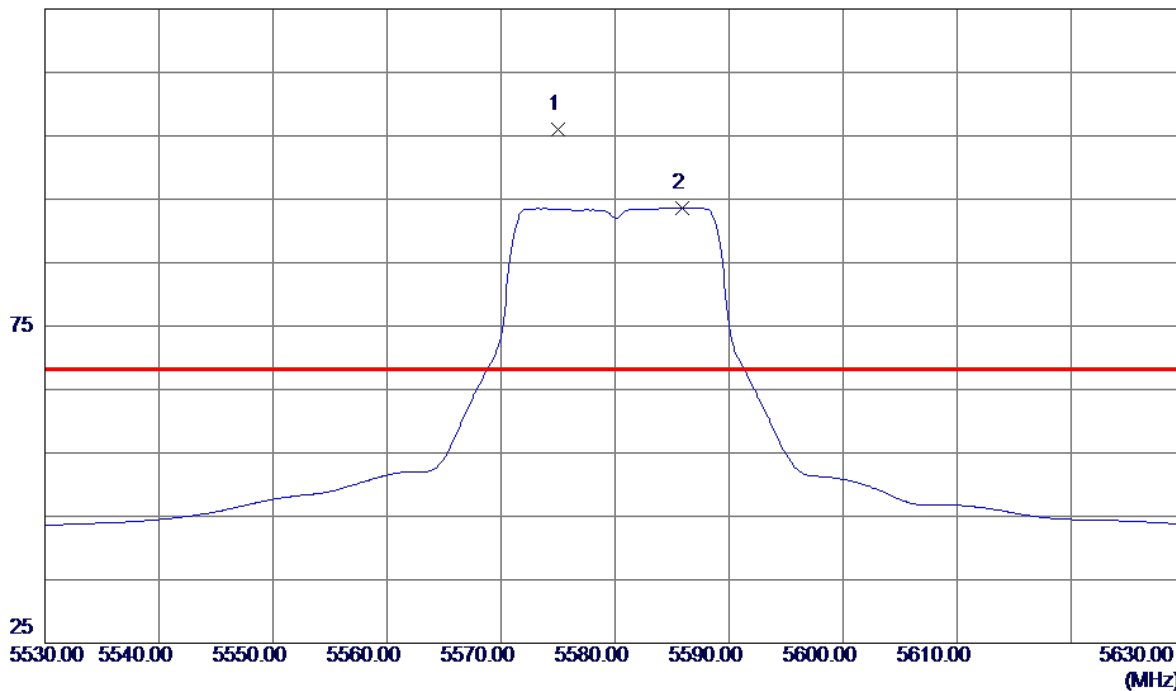

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5575.0000	62.80	43.11	105.91	68.30	37.61	Peak	No Limit
2	5585.9000	50.55	43.14	93.69	999.00	-905.31	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Horizontal

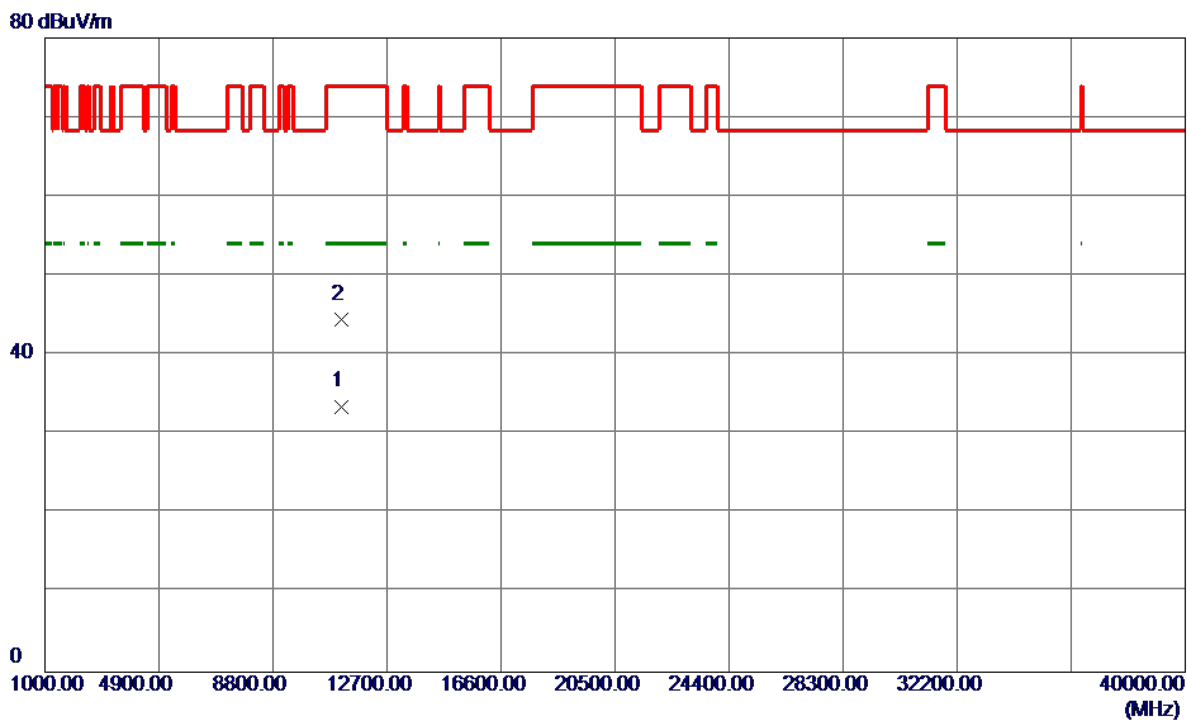


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11152.4800	16.95	16.57	33.52	54.00	-20.48	AVG	
2	11159.1600	27.88	16.59	44.47	74.00	-29.53	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Vertical


125 dBuV/m

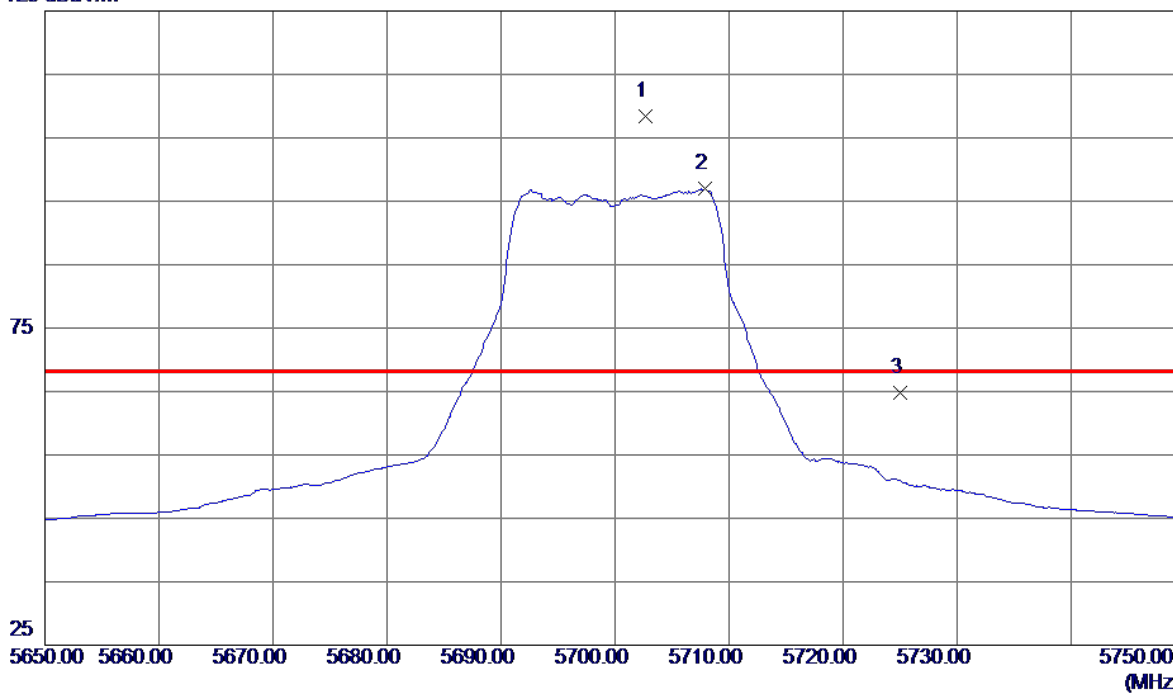

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5702.7000	64.93	43.49	108.42	68.30	40.12	Peak	No Limit
2	5707.9000	53.44	43.51	96.95	999.00	-902.05	AVG	No Limit
3	5725.0000	21.20	43.56	64.76	68.30	-3.54	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Vertical

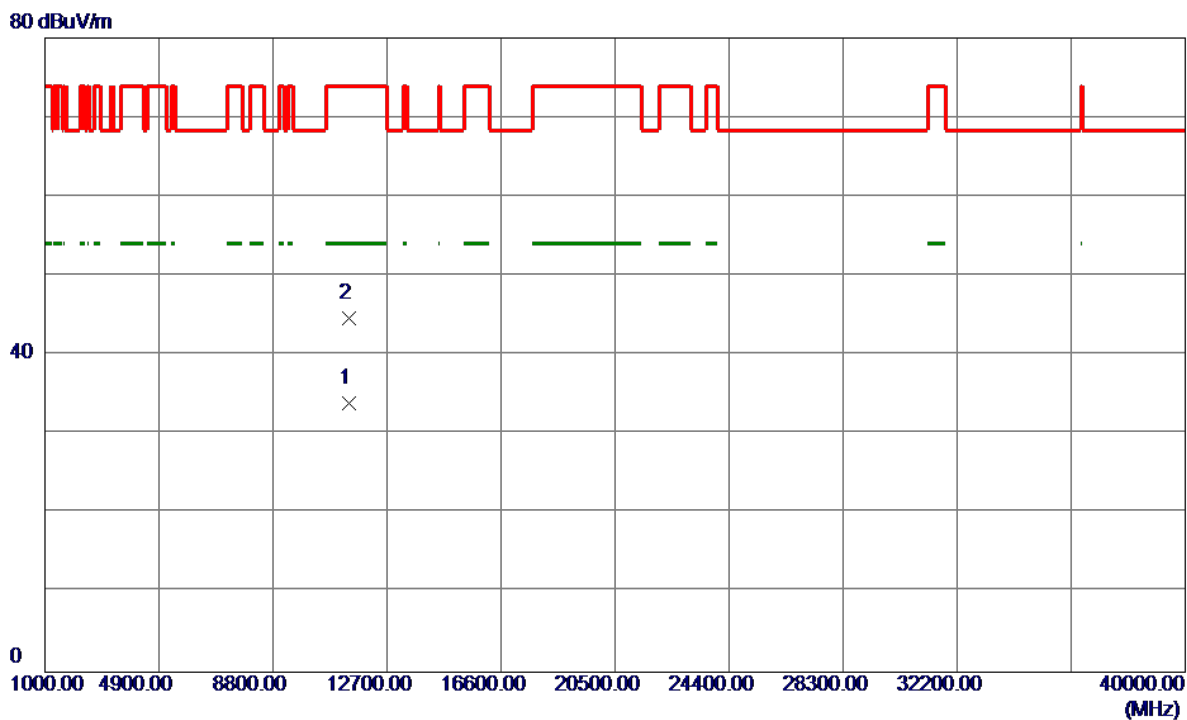


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11392.5800	16.53	17.41	33.94	54.00	-20.06	AVG	
2	11396.4800	27.20	17.42	44.62	74.00	-29.38	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Horizontal

125 dBuV/m

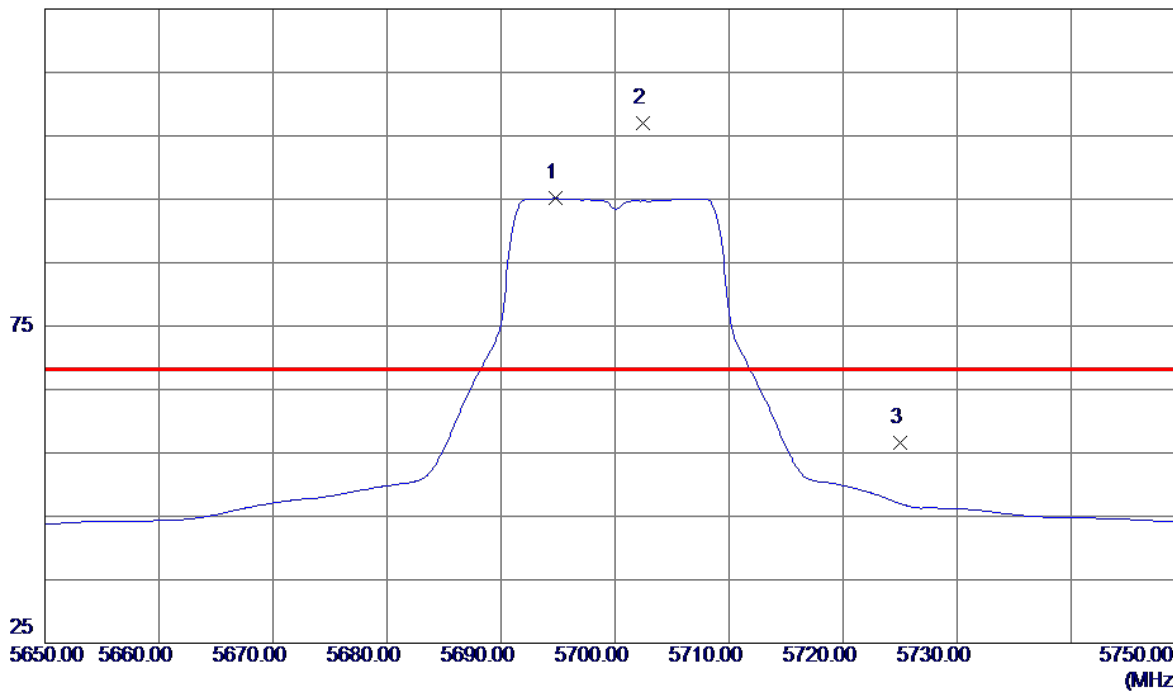


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5694.8000	51.64	43.47	95.11	999.00	-903.89	AVG	No Limit
2 *	5702.4000	63.41	43.49	106.90	68.30	38.60	Peak	No Limit
3	5725.0000	12.99	43.56	56.55	68.30	-11.75	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Horizontal

80 dBuV/m

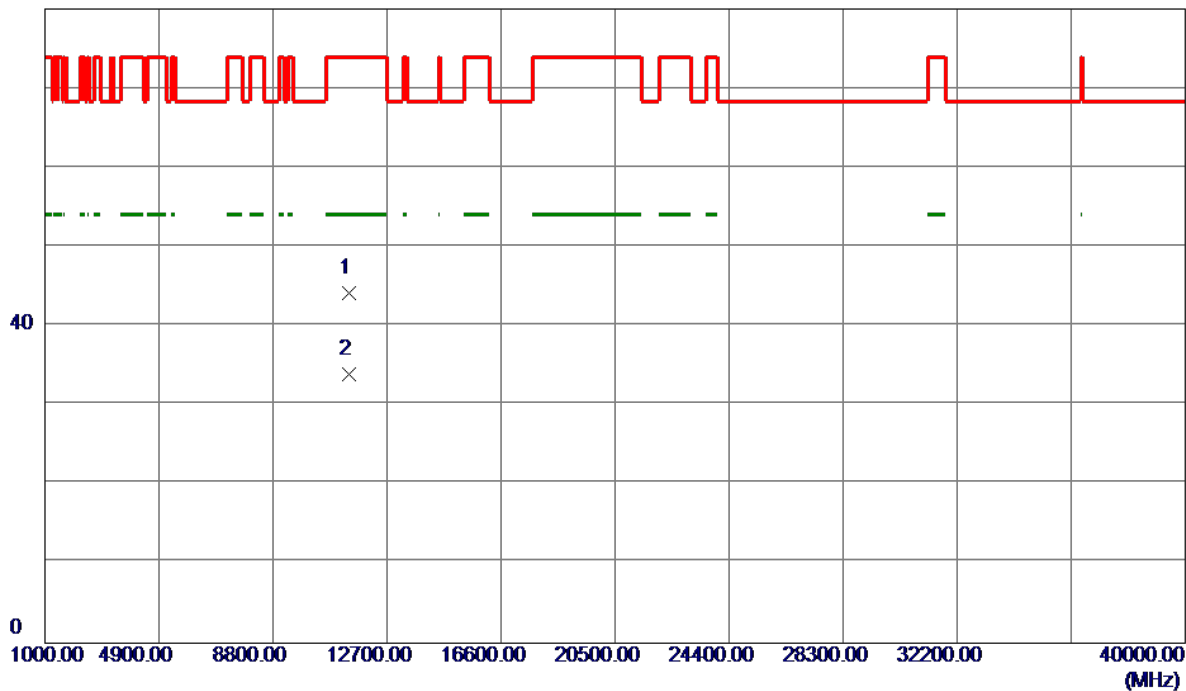


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11393.7600	26.77	17.41	44.18	74.00	-29.82	Peak	
2 *	11394.8800	16.52	17.42	33.94	54.00	-20.06	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical


125 dBuV/m

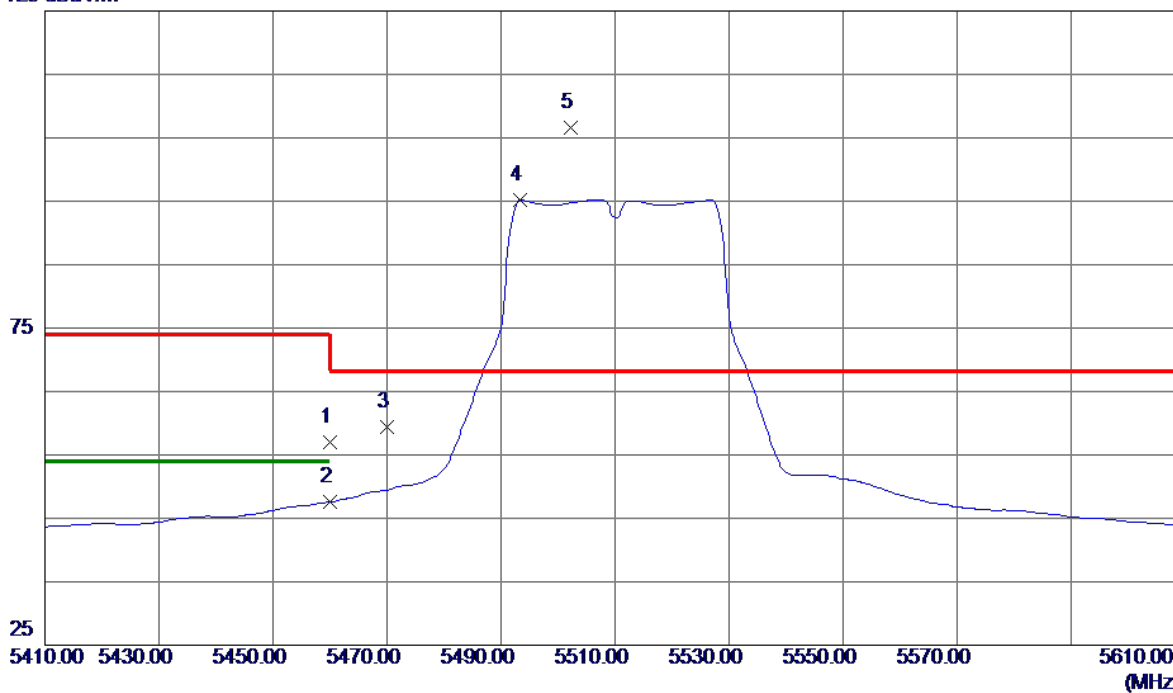

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	14.24	42.68	56.92	74.00	-17.08	Peak	
2	5460.0000	4.85	42.68	47.53	54.00	-6.47	AVG	
3	5470.0000	16.61	42.73	59.34	68.30	-8.96	Peak	
4	5493.4000	52.39	42.85	95.24	999.00	-903.76	AVG	No Limit
5 *	5502.2000	63.74	42.89	106.63	68.30	38.33	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical

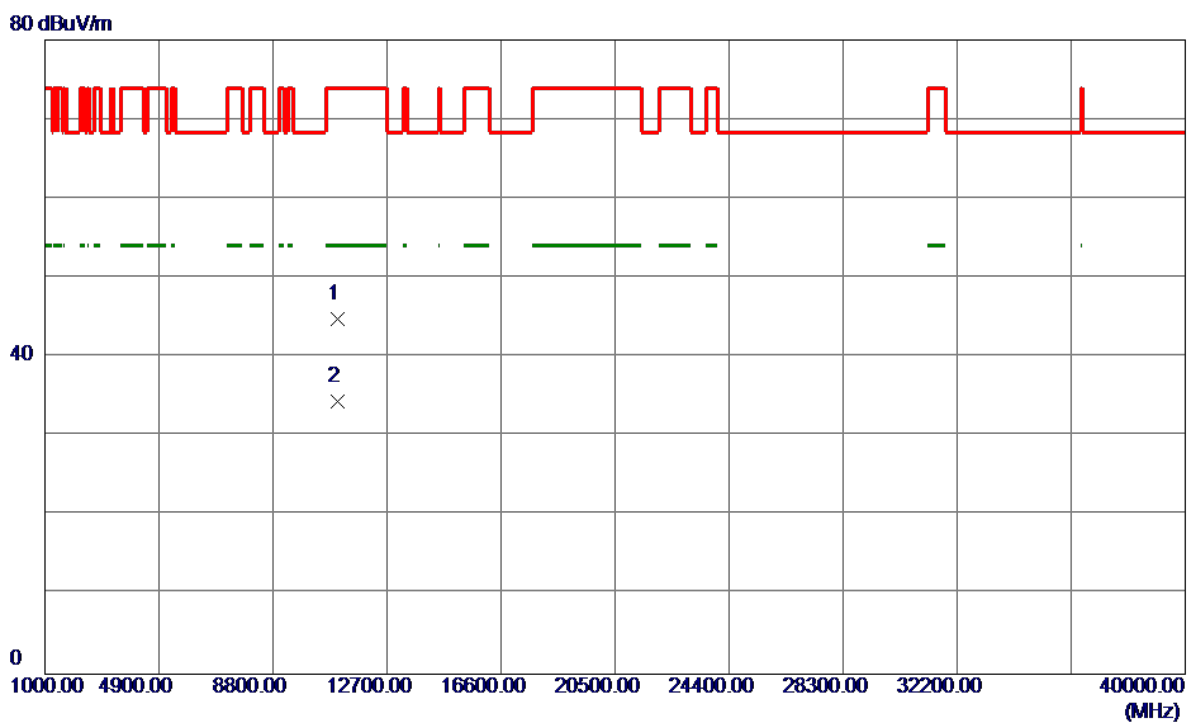


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	11011.8600	28.76	16.07	44.83	74.00	-29.17	Peak	
2 *	11013.1600	18.32	16.08	34.40	54.00	-19.60	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal


125 dBuV/m

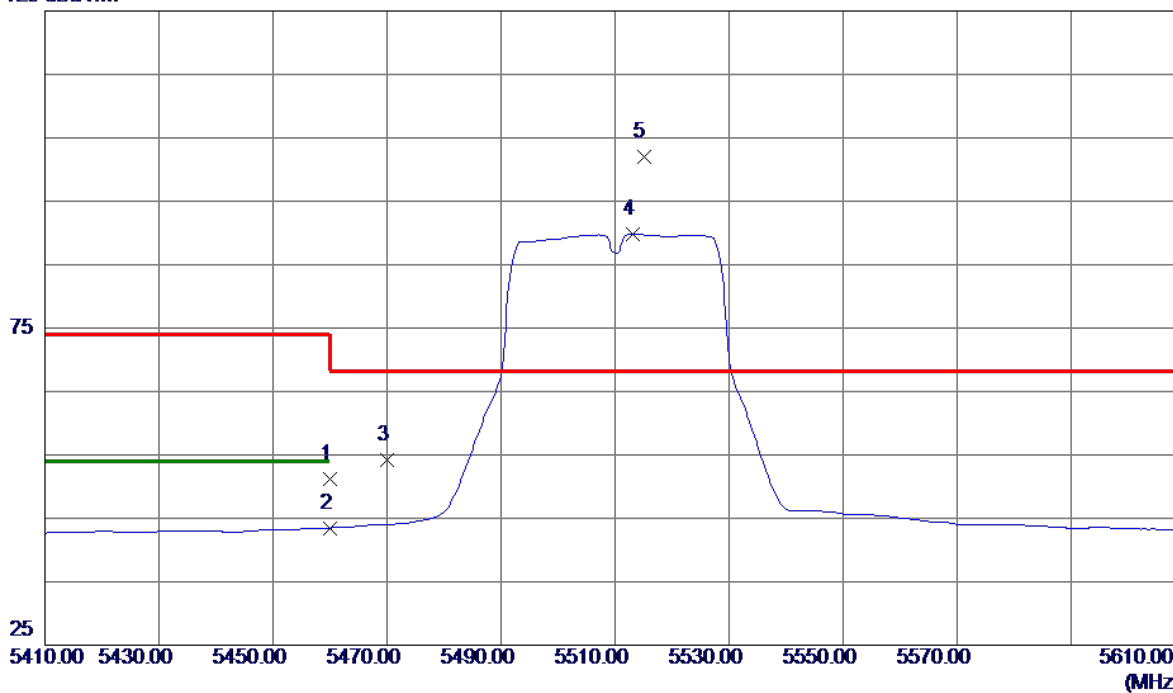

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	8.51	42.68	51.19	74.00	-22.81	Peak	
2	5460.0000	0.80	42.68	43.48	54.00	-10.52	AVG	
3	5470.0000	11.47	42.73	54.20	68.30	-14.10	Peak	
4	5513.2000	46.93	42.92	89.85	999.00	-909.15	AVG	No Limit
5 *	5515.0000	59.15	42.93	102.08	68.30	33.78	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal

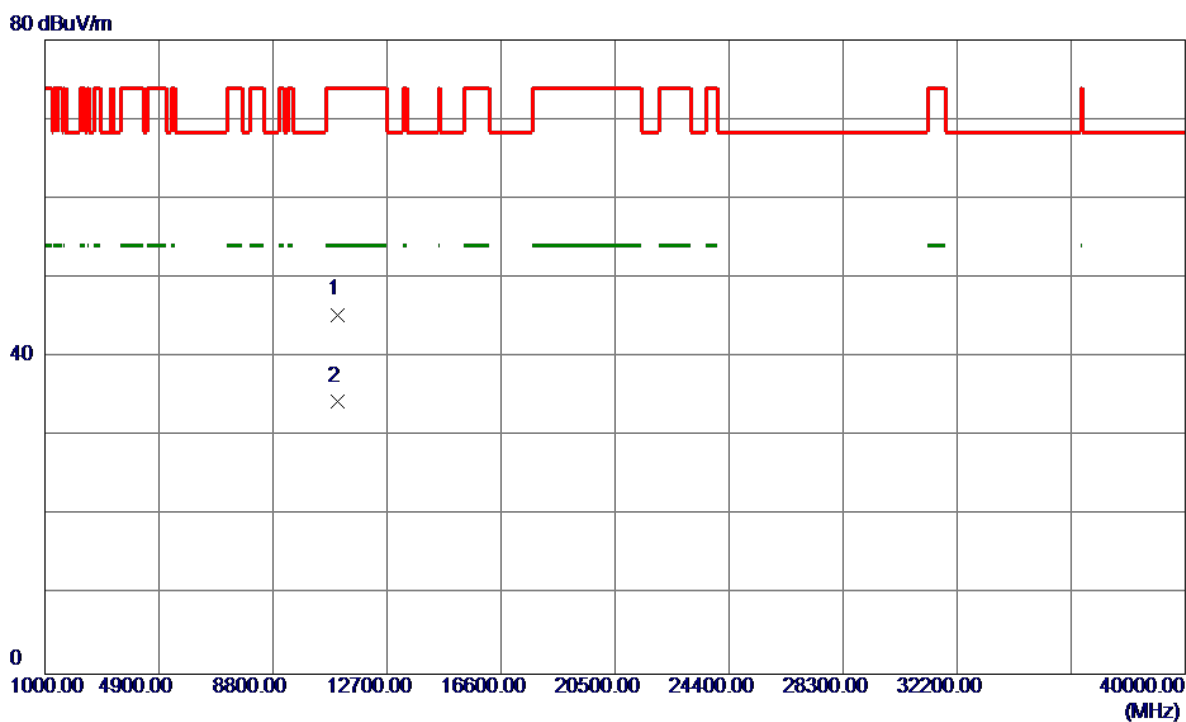


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11019.5199	29.26	16.10	45.36	74.00	-28.64	Peak	
2 *	11029.8800	18.33	16.13	34.46	54.00	-19.54	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Vertical

125 dBuV/m

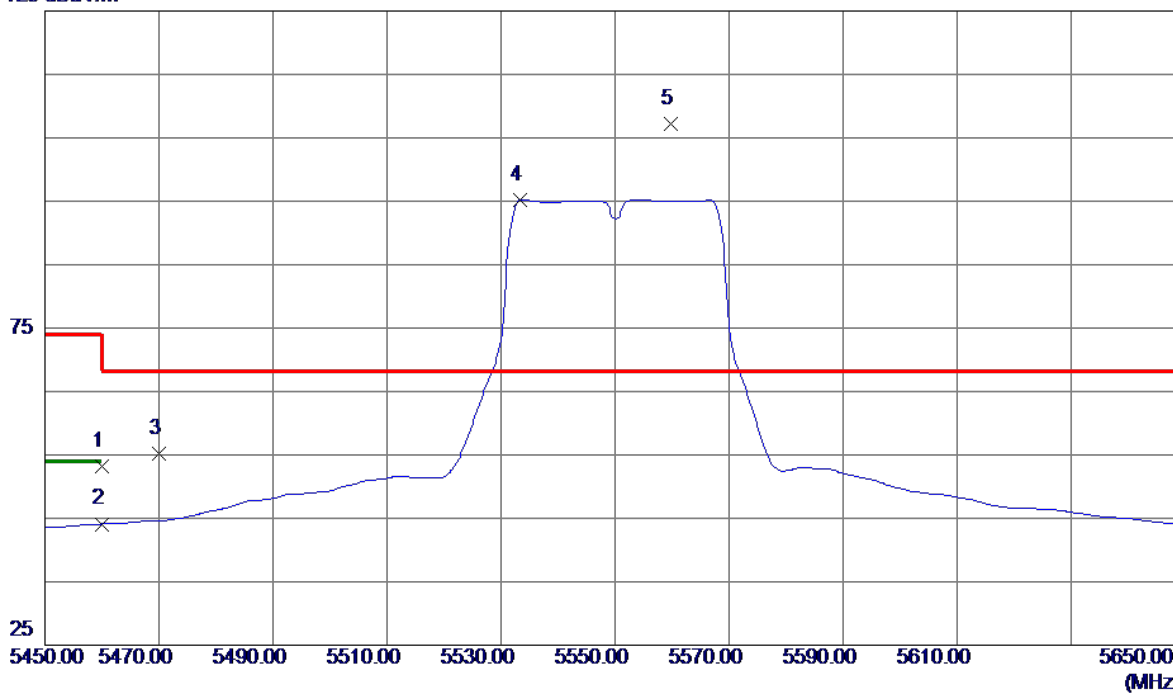


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	10.52	42.68	53.20	74.00	-20.80	Peak	
2	5460.0000	1.42	42.68	44.10	54.00	-9.90	AVG	
3	5470.0000	12.41	42.73	55.14	68.30	-13.16	Peak	
4	5533.4000	52.31	42.98	95.29	999.00	-903.71	AVG	No Limit
5 *	5559.8000	64.22	43.06	107.28	68.30	38.98	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Vertical

80 dBuV/m

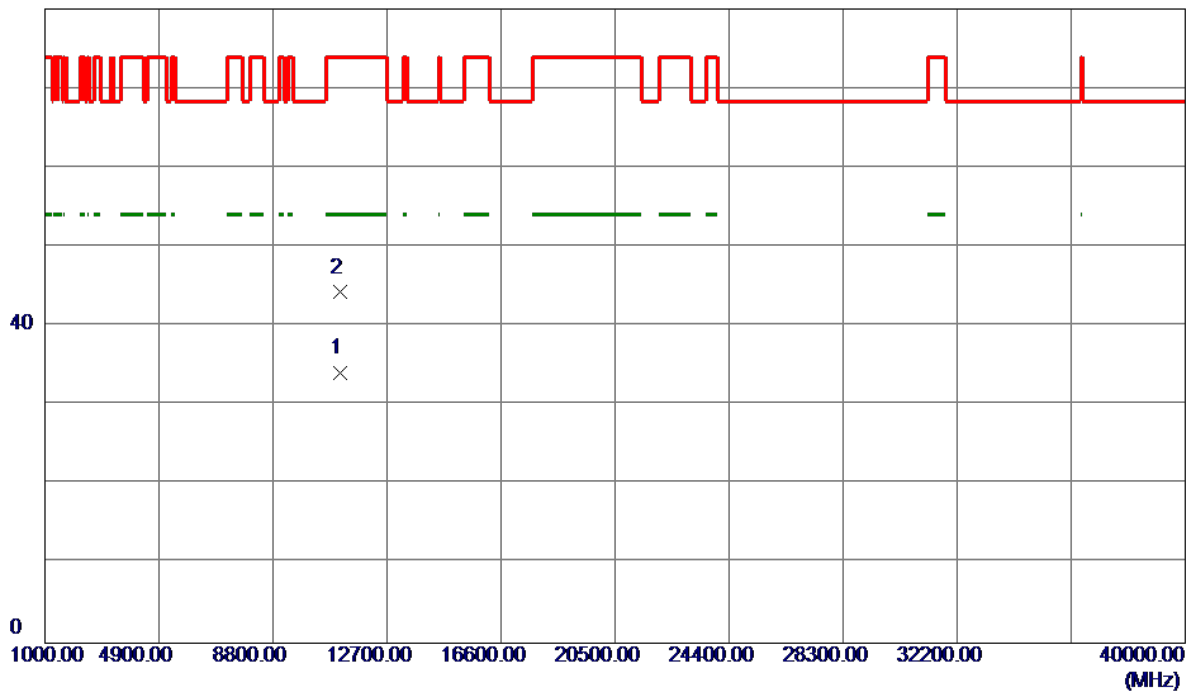


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11104.4800	17.68	16.40	34.08	54.00	-19.92	AVG	
2	11105.6400	27.84	16.40	44.24	74.00	-29.76	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Horizontal

125 dBuV/m

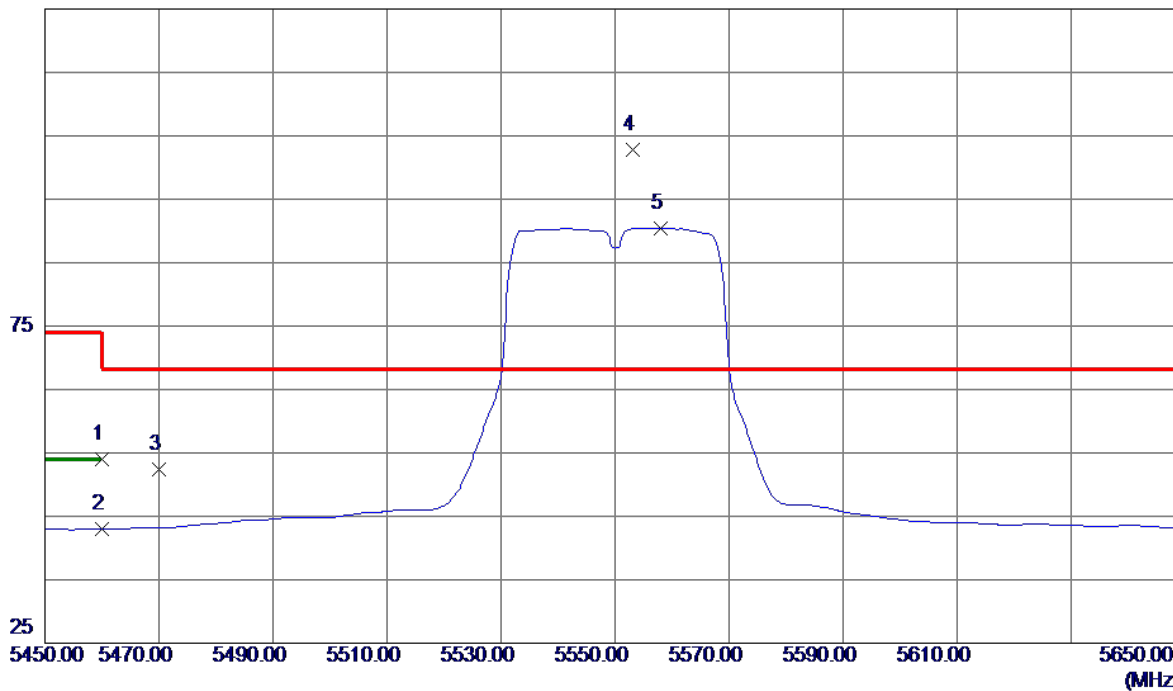


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	11.26	42.68	53.94	74.00	-20.06	Peak	
2	5460.0000	0.26	42.68	42.94	54.00	-11.06	AVG	
3	5470.0000	9.74	42.73	52.47	68.30	-15.83	Peak	
4 *	5553.2000	59.84	43.04	102.88	68.30	34.58	Peak	No Limit
5	5558.0000	47.43	43.06	90.49	999.00	-908.51	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Horizontal

80 dBuV/m

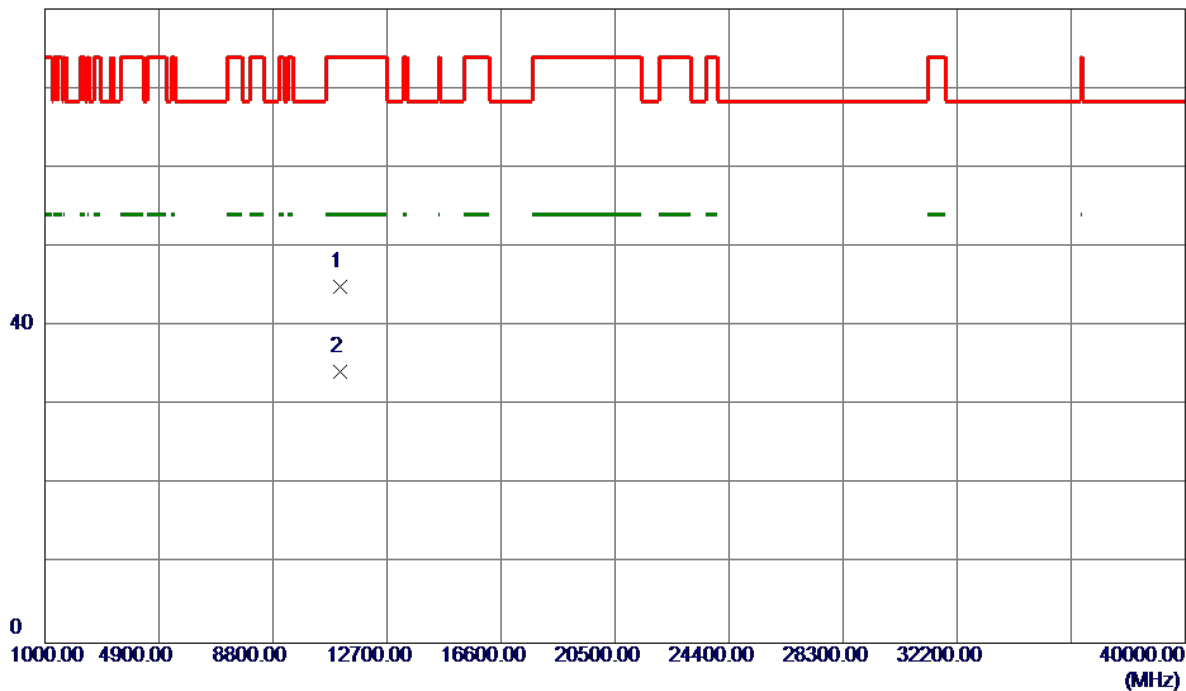


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11098.6400	28.59	16.38	44.97	74.00	-29.03	Peak	
2 *	11102.6200	17.78	16.39	34.17	54.00	-19.83	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical

125 dBuV/m

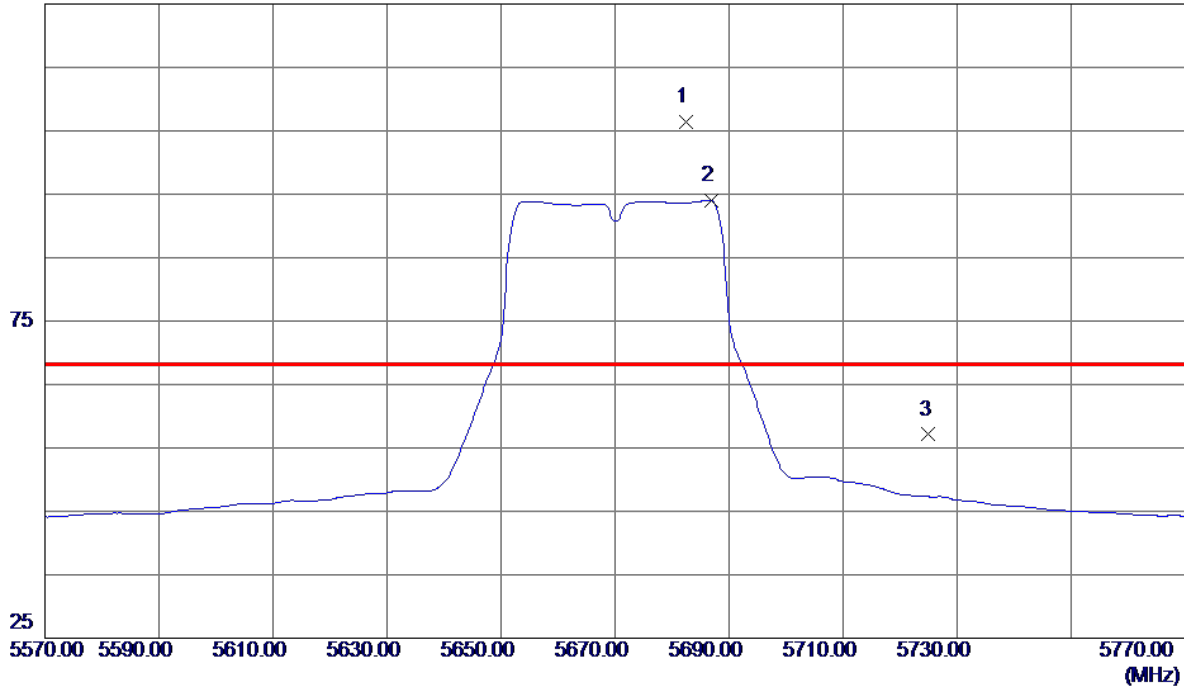


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5682.4000	62.88	43.43	106.31	68.30	38.01	Peak	No Limit
2	5686.8000	50.62	43.44	94.06	999.00	-904.94	AVG	No Limit
3	5725.0000	13.54	43.56	57.10	68.30	-11.20	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical

80 dBuV/m

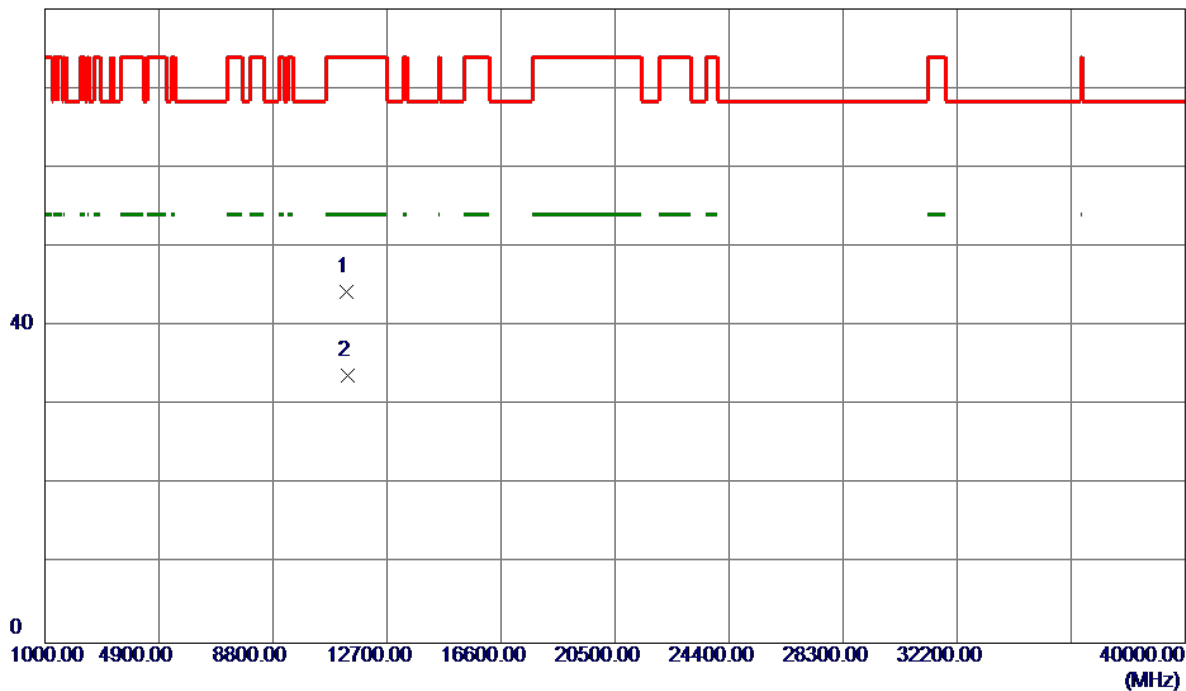


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11330.2400	27.07	17.19	44.26	74.00	-29.74	Peak	
2 *	11347.8400	16.48	17.25	33.73	54.00	-20.27	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal


125 dBuV/m

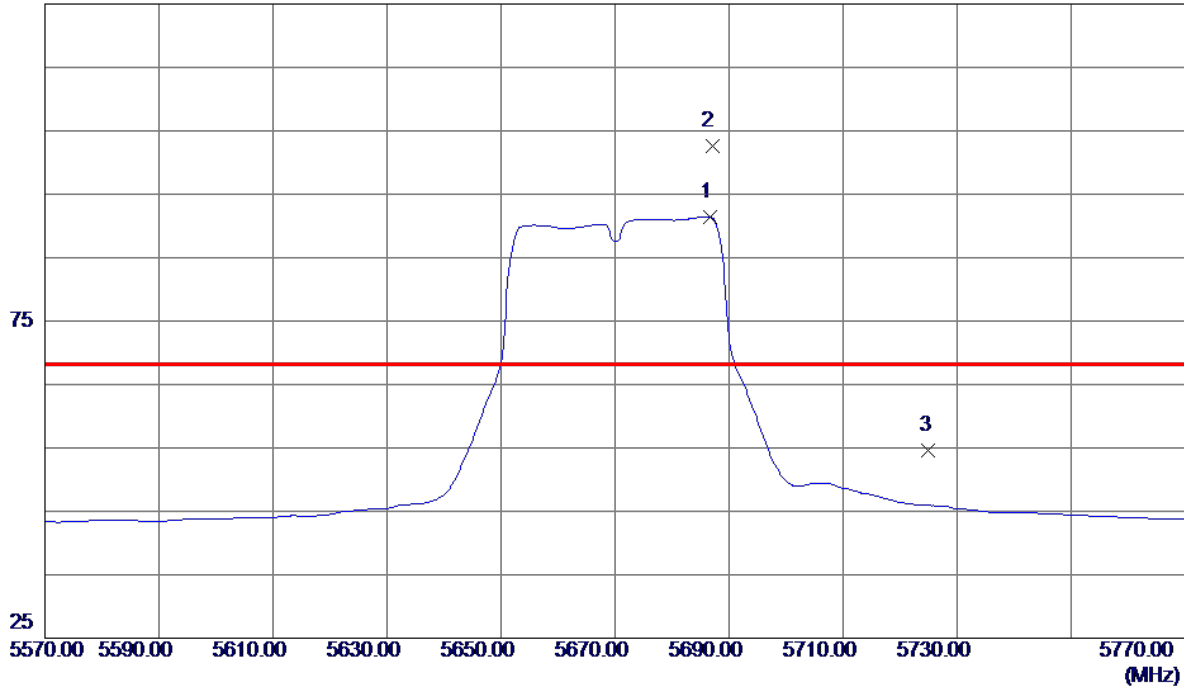

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5686.6000	47.94	43.44	91.38	999.00	-907.62	AVG	No Limit
2 *	5687.0000	59.14	43.44	102.58	68.30	34.28	Peak	No Limit
3	5725.0000	10.97	43.56	54.53	68.30	-13.77	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal

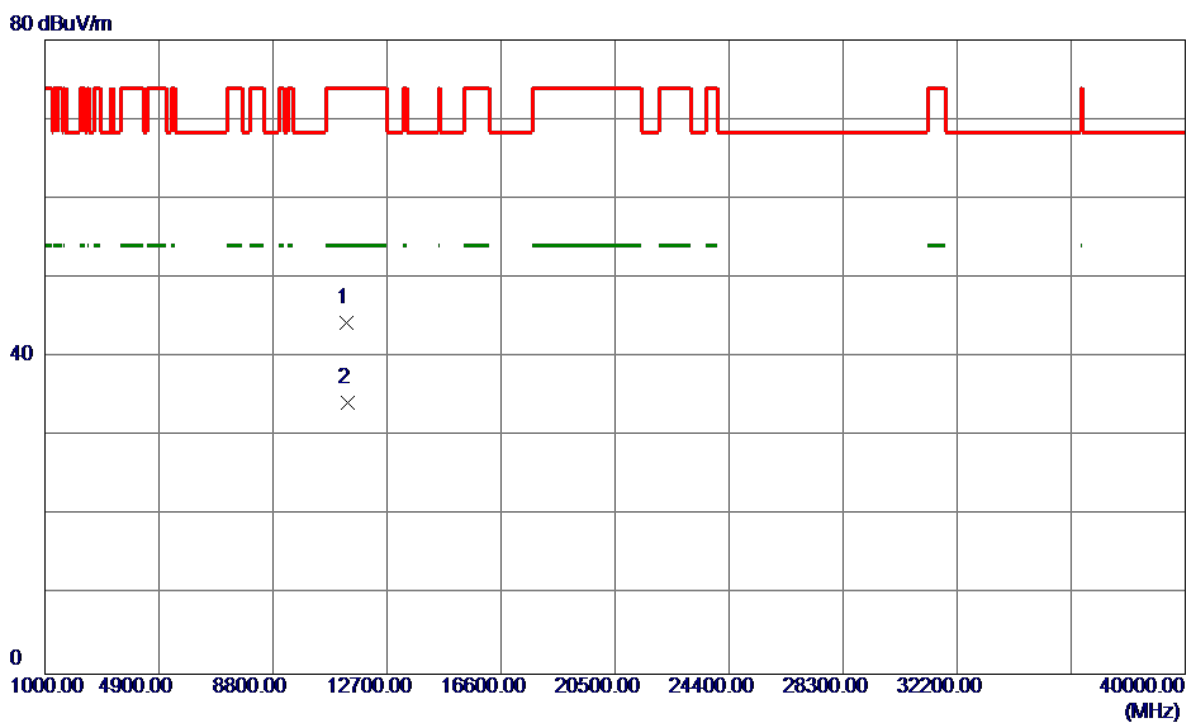


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	11334.7000	27.13	17.20	44.33	74.00	-29.67	Peak	
2 *	11349.6600	16.93	17.26	34.19	54.00	-19.81	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical


125 dBuV/m

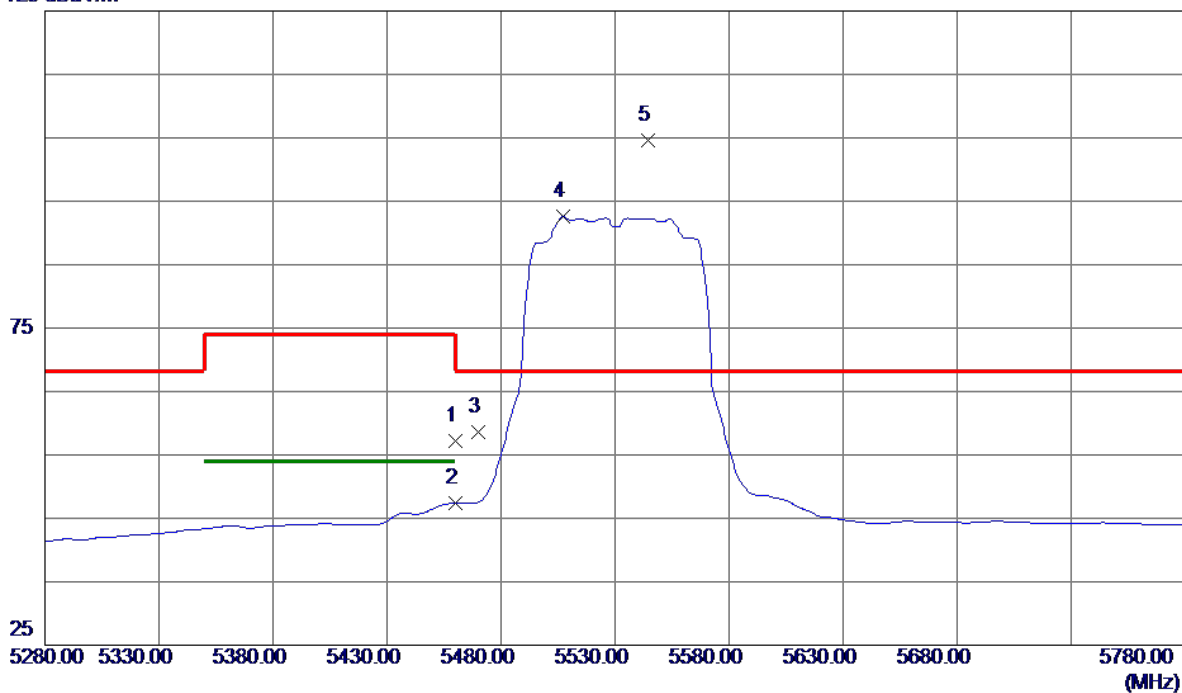

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	14.59	42.68	57.27	74.00	-16.73	Peak	
2	5460.0000	4.69	42.68	47.37	54.00	-6.63	AVG	
3	5470.0000	15.79	42.73	58.52	68.30	-9.78	Peak	
4	5507.0000	49.65	42.90	92.55	999.00	-906.45	AVG	No Limit
5 *	5544.5000	61.58	43.01	104.59	68.30	36.29	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Vertical

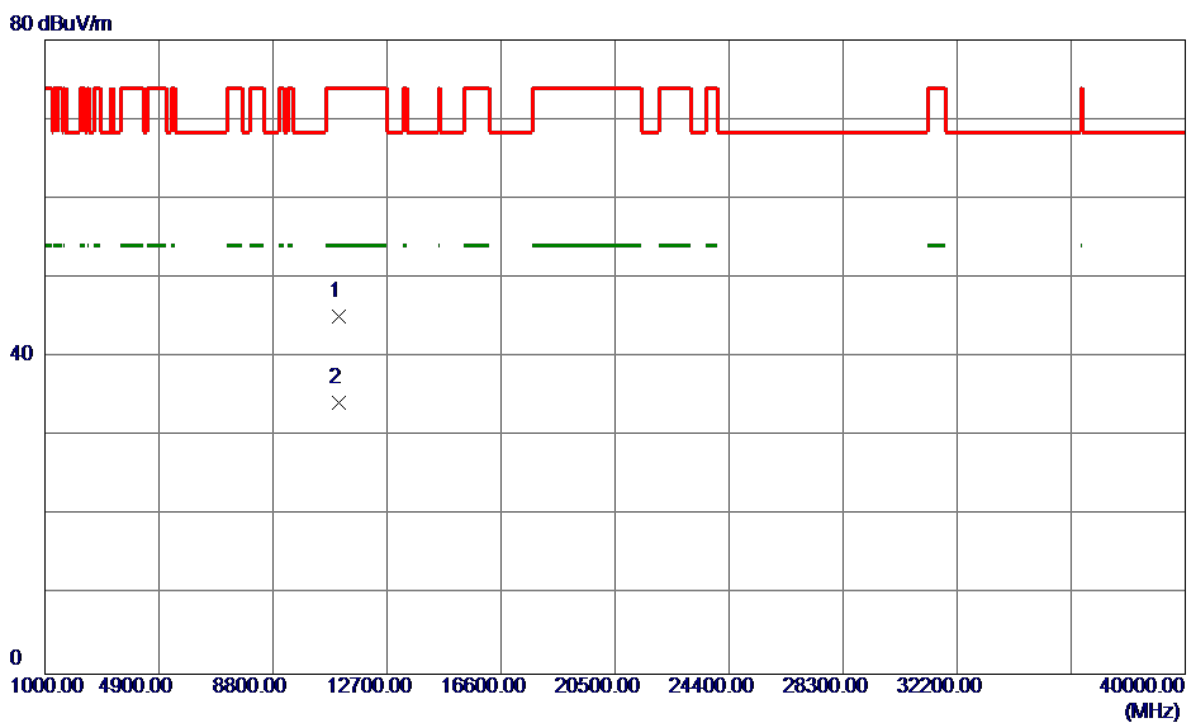

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11050.1800	28.95	16.21	45.16	74.00	-28.84	Peak	
2 *	11052.6600	18.00	16.21	34.21	54.00	-19.79	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Horizontal

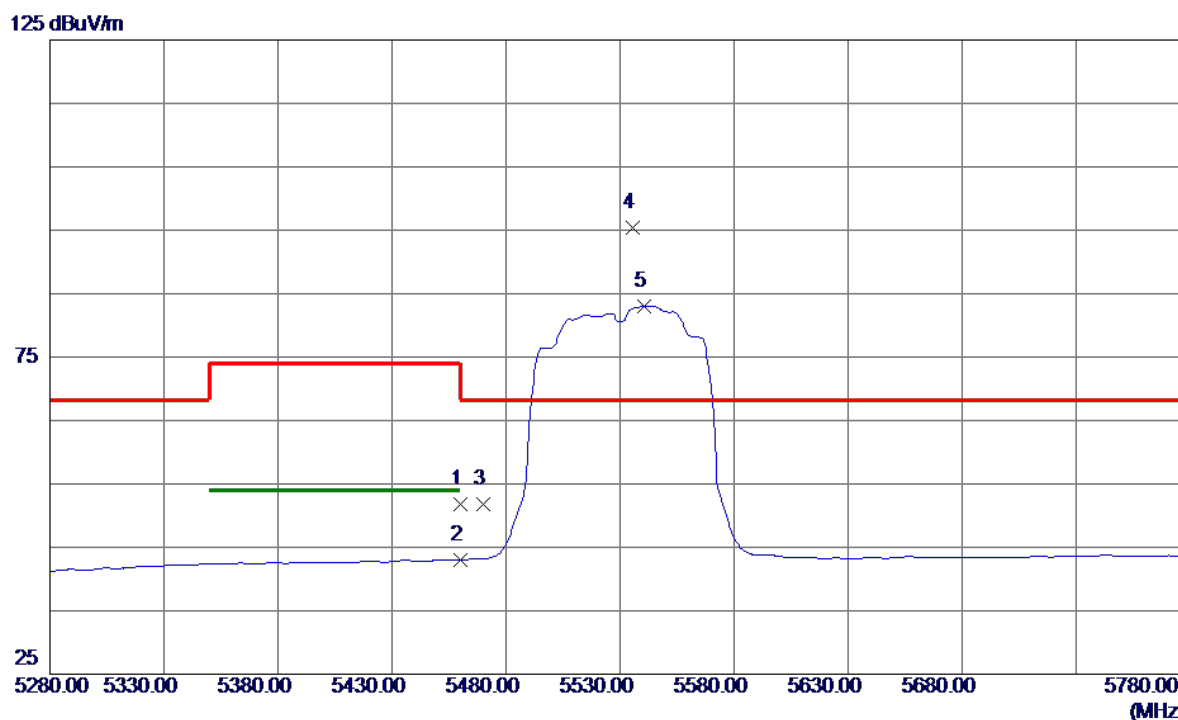

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	9.15	42.68	51.83	74.00	-22.17	Peak	
2	5460.0000	0.32	42.68	43.00	54.00	-11.00	AVG	
3	5470.0000	8.98	42.73	51.71	68.30	-16.59	Peak	
4 *	5535.5000	52.44	42.99	95.43	68.30	27.13	Peak	No Limit
5	5540.5000	40.06	43.00	83.06	999.00	-915.94	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal

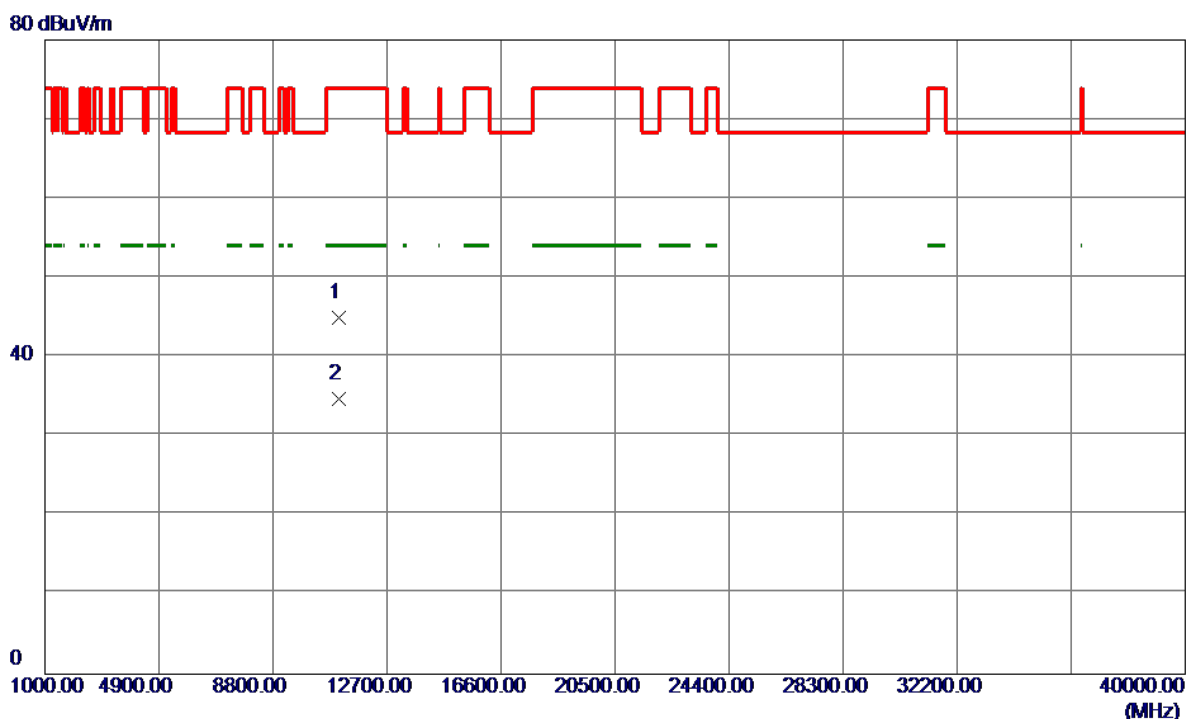


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11050.8600	28.68	16.21	44.89	74.00	-29.11	Peak	
2 *	11051.0000	18.44	16.21	34.65	54.00	-19.35	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical


125 dBuV/m

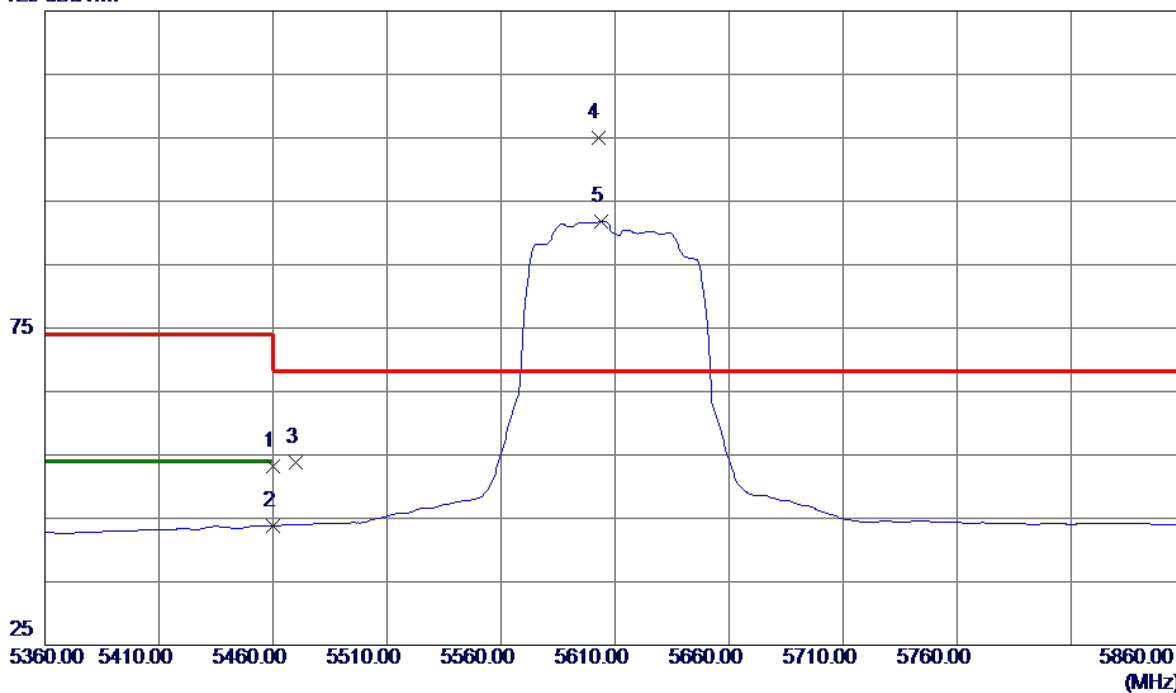

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	10.49	42.68	53.17	74.00	-20.83	Peak	
2	5460.0000	1.16	42.68	43.84	54.00	-10.16	AVG	
3	5470.0000	10.98	42.73	53.71	68.30	-14.59	Peak	
4 *	5602.5000	61.88	43.19	105.07	68.30	36.77	Peak	No Limit
5	5604.0000	48.60	43.19	91.79	999.00	-907.21	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical

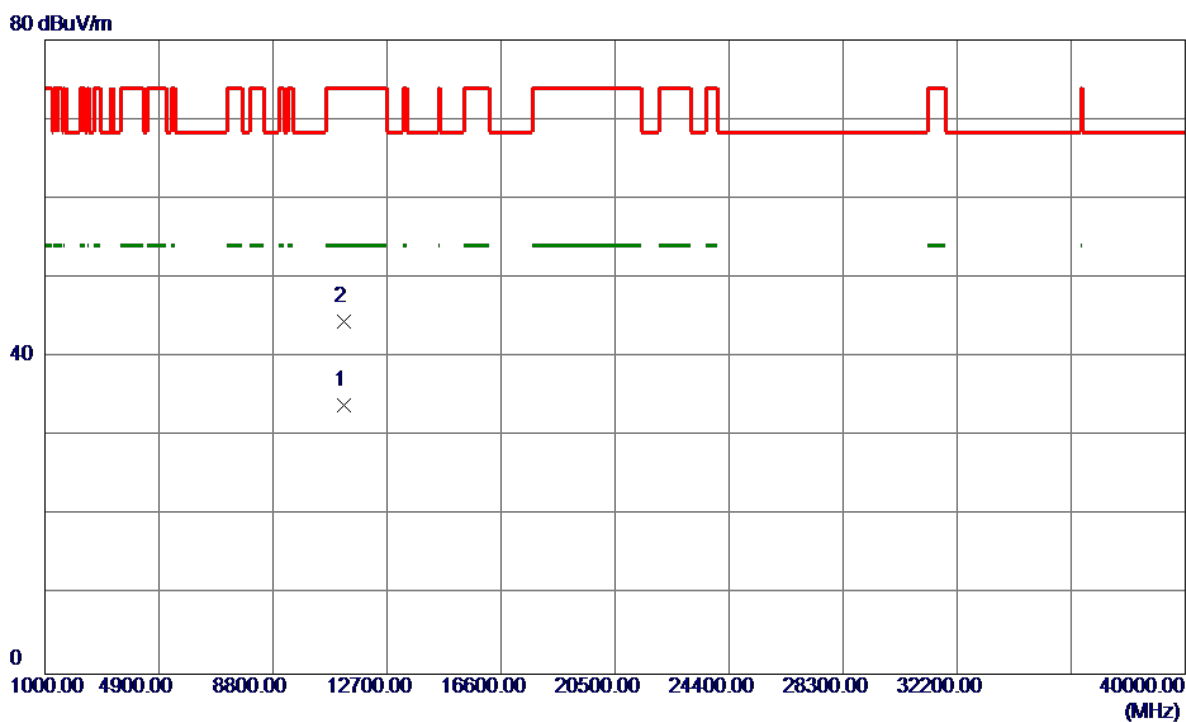


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11210.4600	17.09	16.77	33.86	54.00	-20.14	AVG	
2	11212.5000	27.74	16.78	44.52	74.00	-29.48	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal


125 dBuV/m

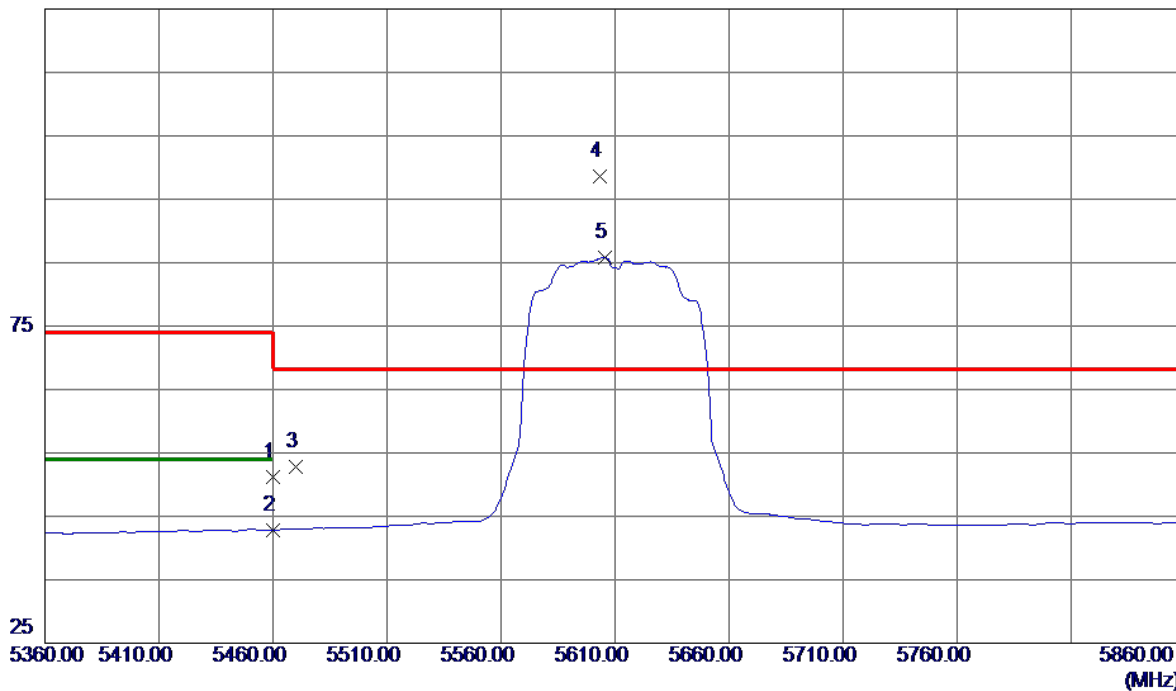

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	8.44	42.68	51.12	74.00	-22.88	Peak	
2	5460.0000	0.16	42.68	42.84	54.00	-11.16	AVG	
3	5470.0000	10.02	42.73	52.75	68.30	-15.55	Peak	
4 *	5603.5000	55.35	43.19	98.54	68.30	30.24	Peak	No Limit
5	5605.5000	42.59	43.20	85.79	999.00	-913.21	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal

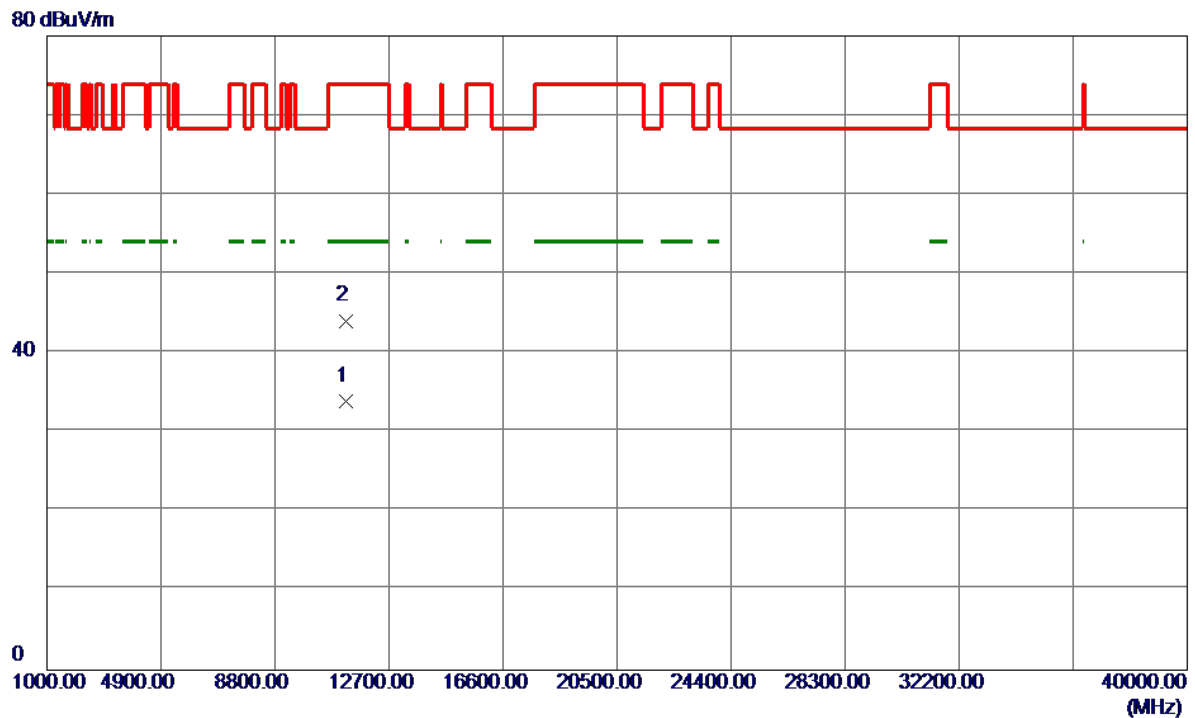


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11210.1400	17.15	16.77	33.92	54.00	-20.08	AVG	
2	11223.8800	27.26	16.82	44.08	74.00	-29.92	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC160 Mode 5570MHz

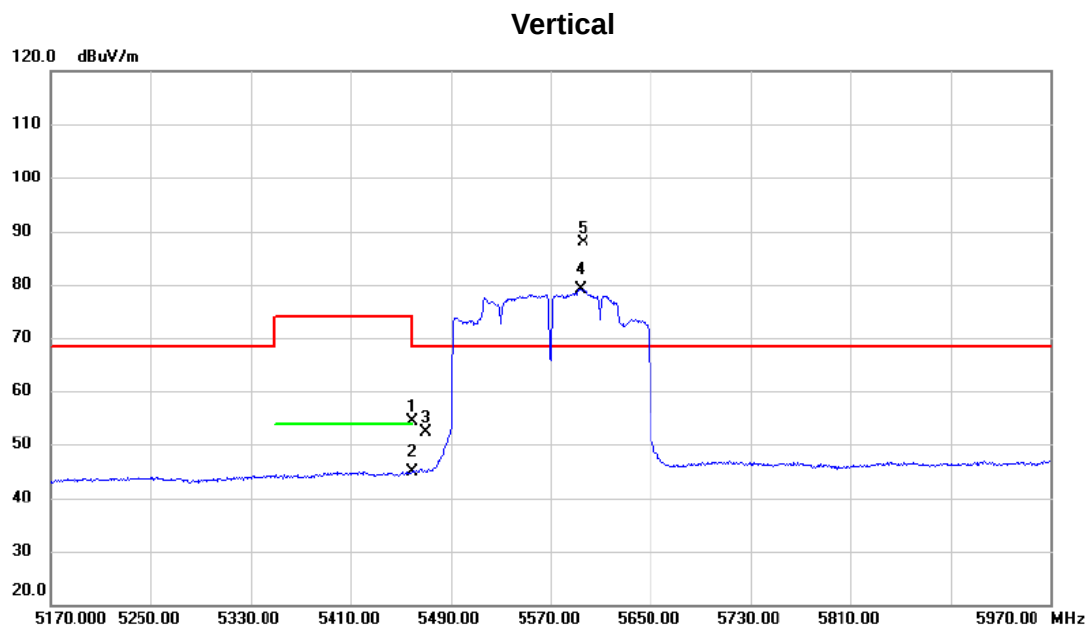

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	34.36	20.06	54.42	74.00	-19.58	peak	
2		5460.000	24.82	20.06	44.88	54.00	-9.12	AVG	
3		5470.000	32.37	20.13	52.50	68.30	-15.80	peak	
4	X	5594.000	58.54	20.68	79.22	68.30	10.92	AVG	No Limit
5	*	5595.600	67.13	20.69	87.82	68.30	19.52	peak	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC160 Mode 5570MHz

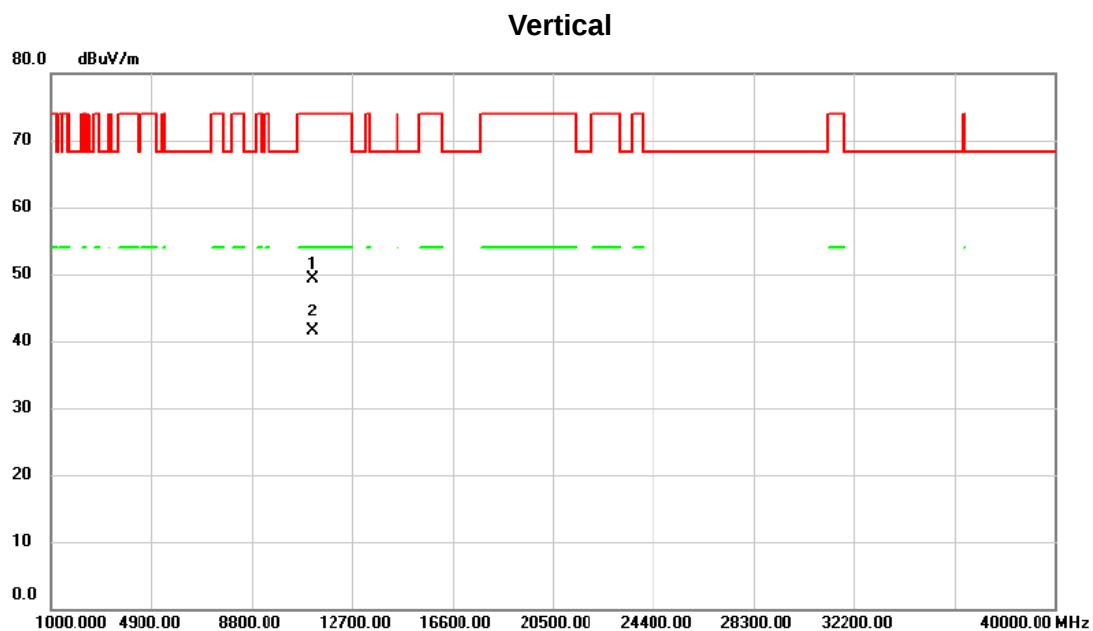

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11140.000	32.68	16.53	49.21	74.00	-24.79	peak	
2	*	11140.250	25.00	16.53	41.53	54.00	-12.47	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC160 Mode 5570MHz

Horizontal

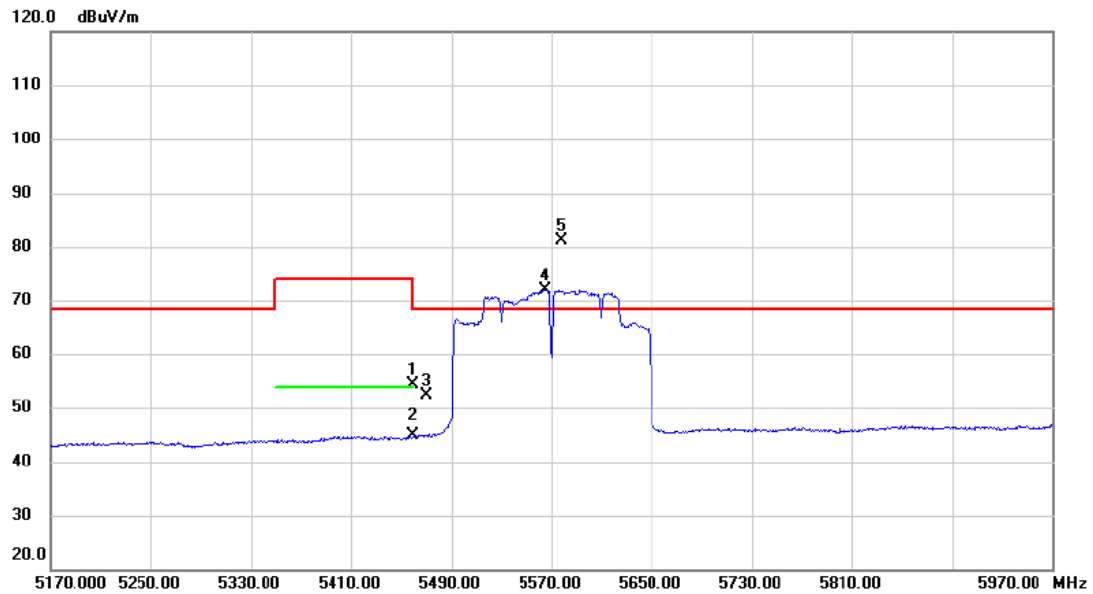

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	34.34	20.06	54.40	74.00	-19.60	peak	
2		5460.000	24.73	20.06	44.79	54.00	-9.21	AVG	
3		5470.000	32.19	20.13	52.32	68.30	-15.98	peak	
4	X	5565.200	51.38	20.56	71.94	68.30	3.64	peak	No Limit
5	*	5578.000	60.42	20.61	81.03	68.30	12.73	peak	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC160 Mode 5570MHz

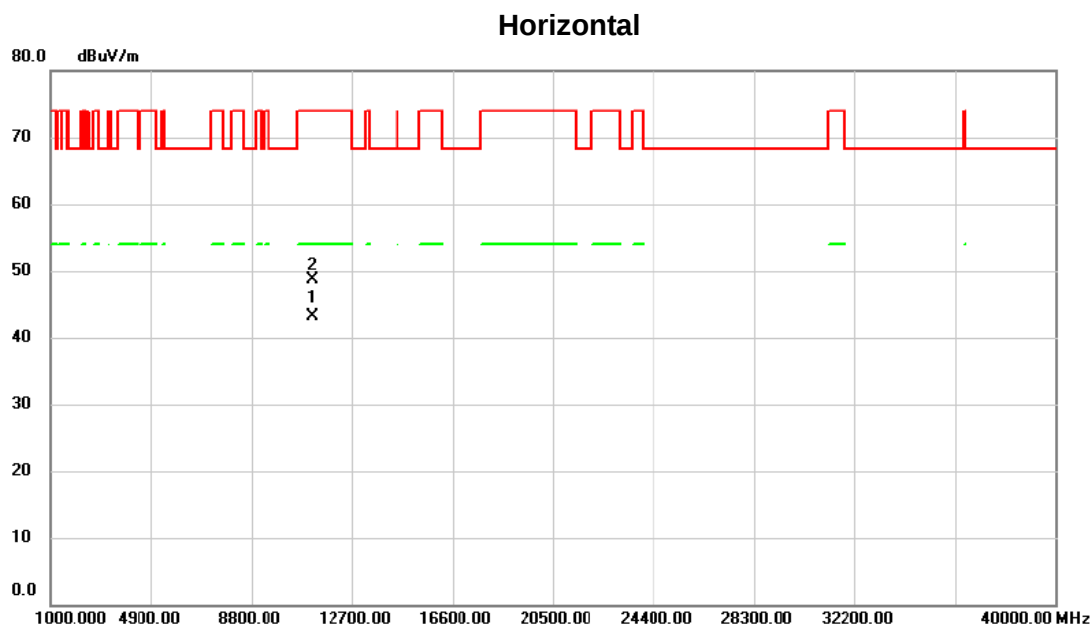

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11140.000	26.53	16.53	43.06	54.00	-10.94	AVG	
2		11140.500	32.20	16.53	48.73	74.00	-25.27	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Vertical

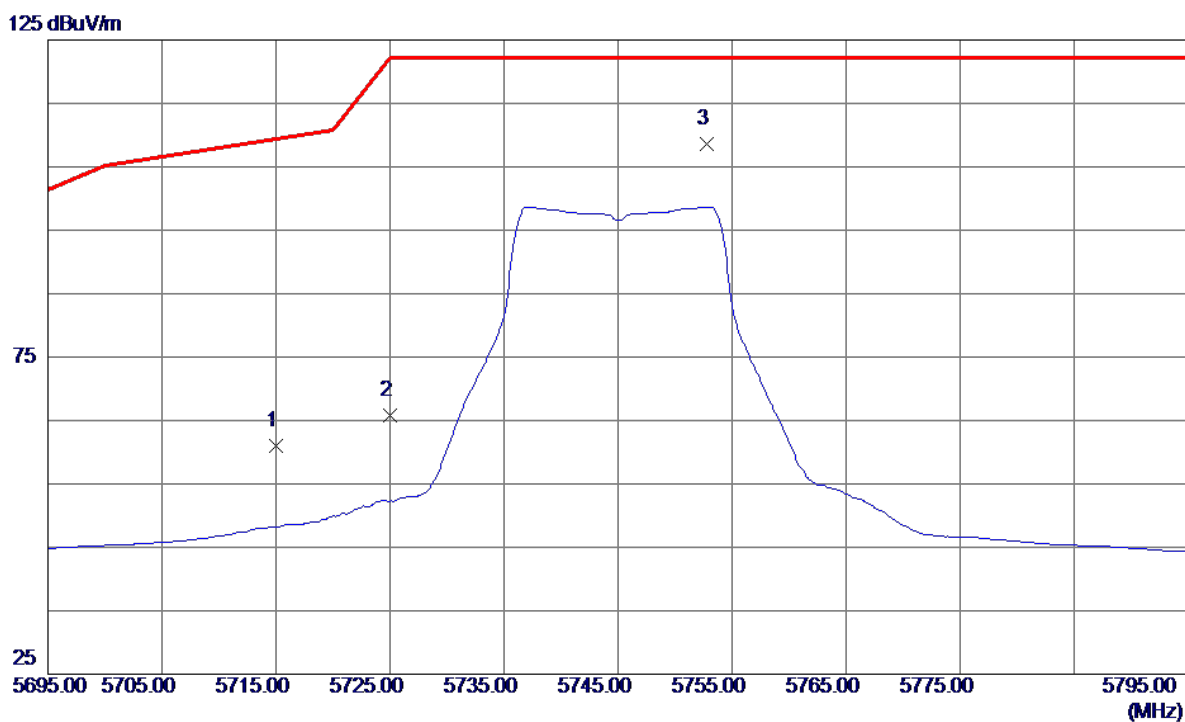


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	17.52	43.53	61.05	109.40	-48.35	Peak	
2	5725.0000	22.15	43.56	65.71	122.20	-56.49	Peak	
3 *	5752.8000	65.00	43.64	108.64	122.20	-13.56	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Vertical


80 dBuV/m

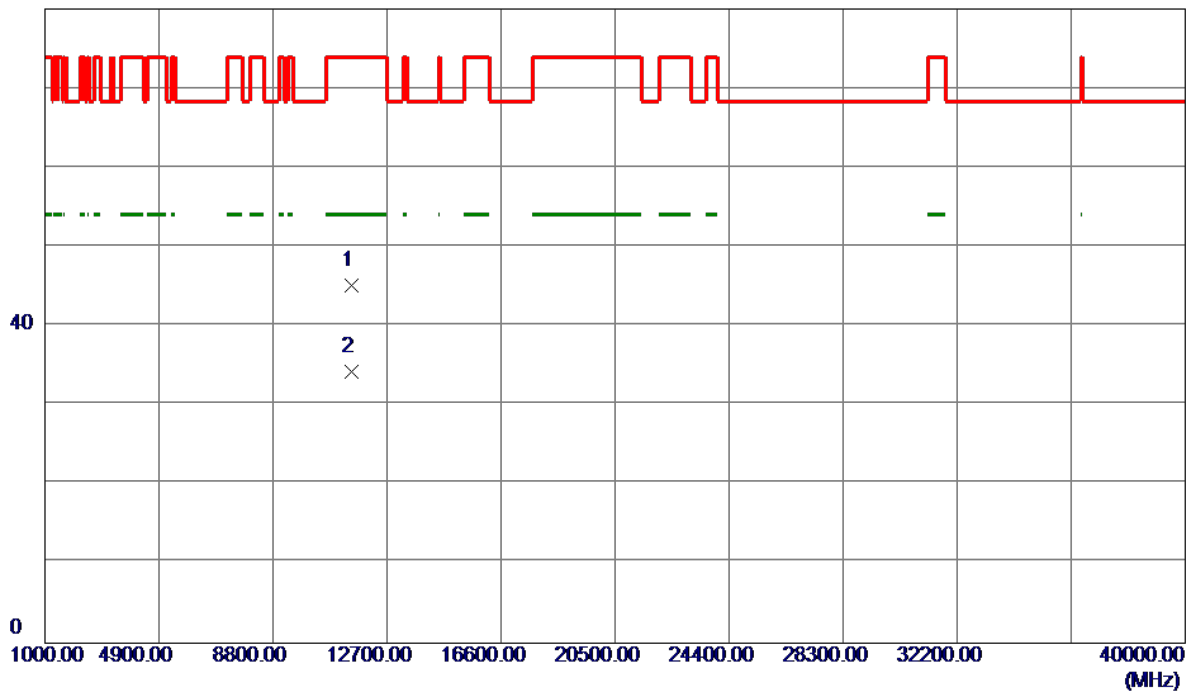

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11491.3000	27.41	17.75	45.16	74.00	-28.84	Peak	
2 *	11494.6400	16.48	17.77	34.25	54.00	-19.75	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Horizontal

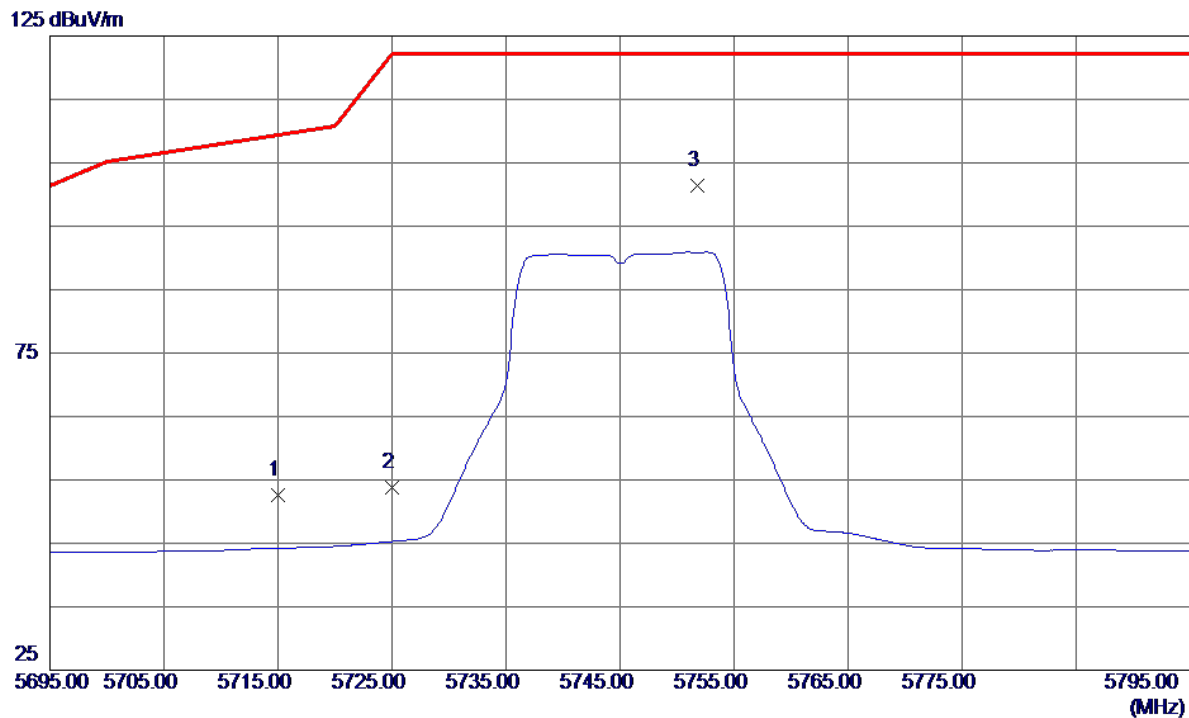


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	9.07	43.53	52.60	109.40	-56.80	Peak	
2	5725.0000	10.19	43.56	53.75	122.20	-68.45	Peak	
3 *	5751.8000	57.75	43.64	101.39	122.20	-20.81	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Horizontal


80 dBuV/m

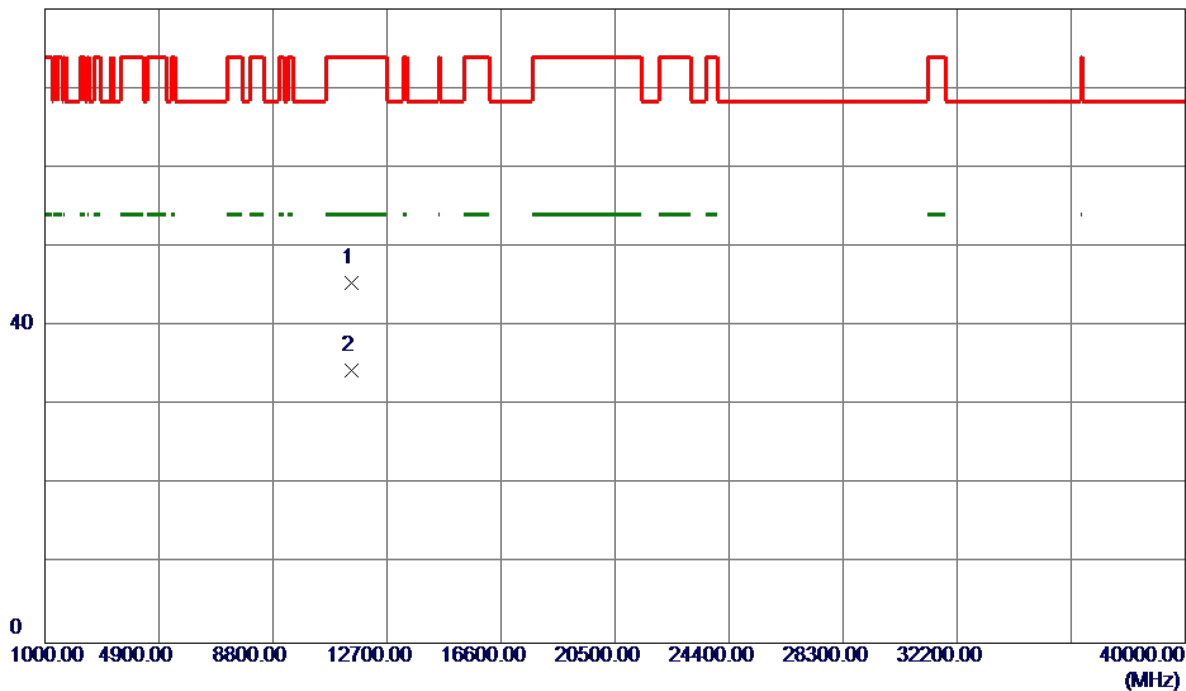

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11485.8200	27.68	17.74	45.42	74.00	-28.58	Peak	
2 *	11491.5000	16.60	17.76	34.36	54.00	-19.64	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Vertical

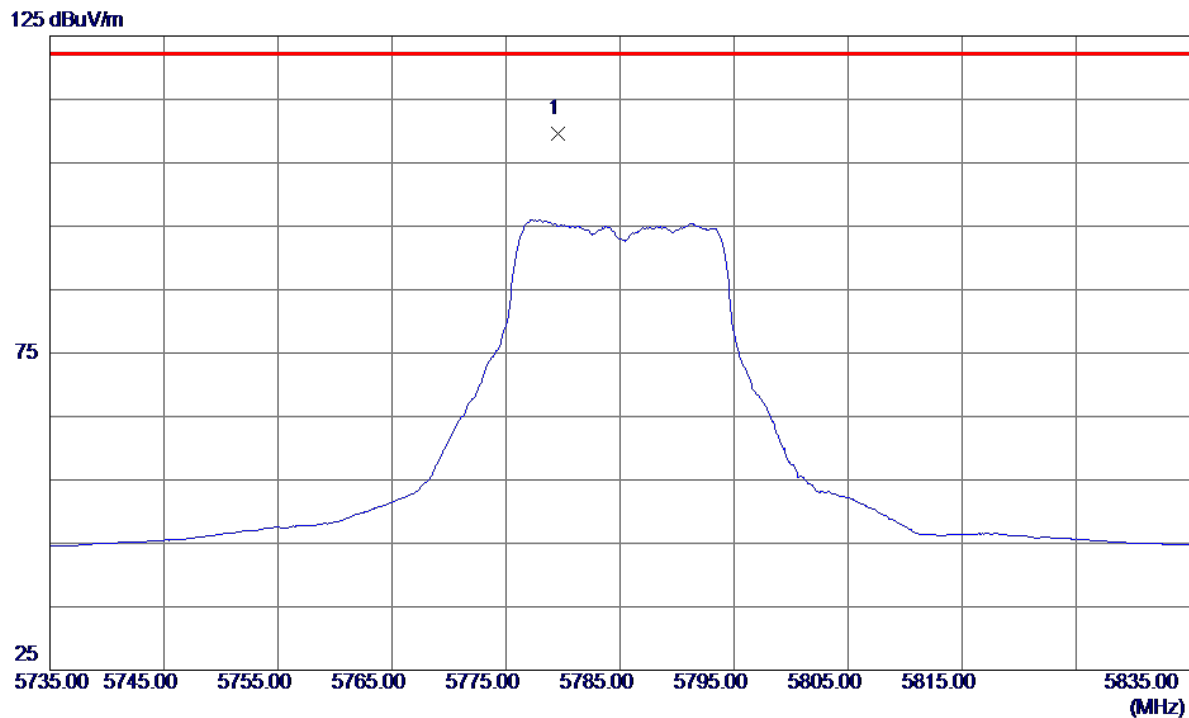

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	5779.6000	65.97	43.72	109.69	122.20	-12.51	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz


Vertical

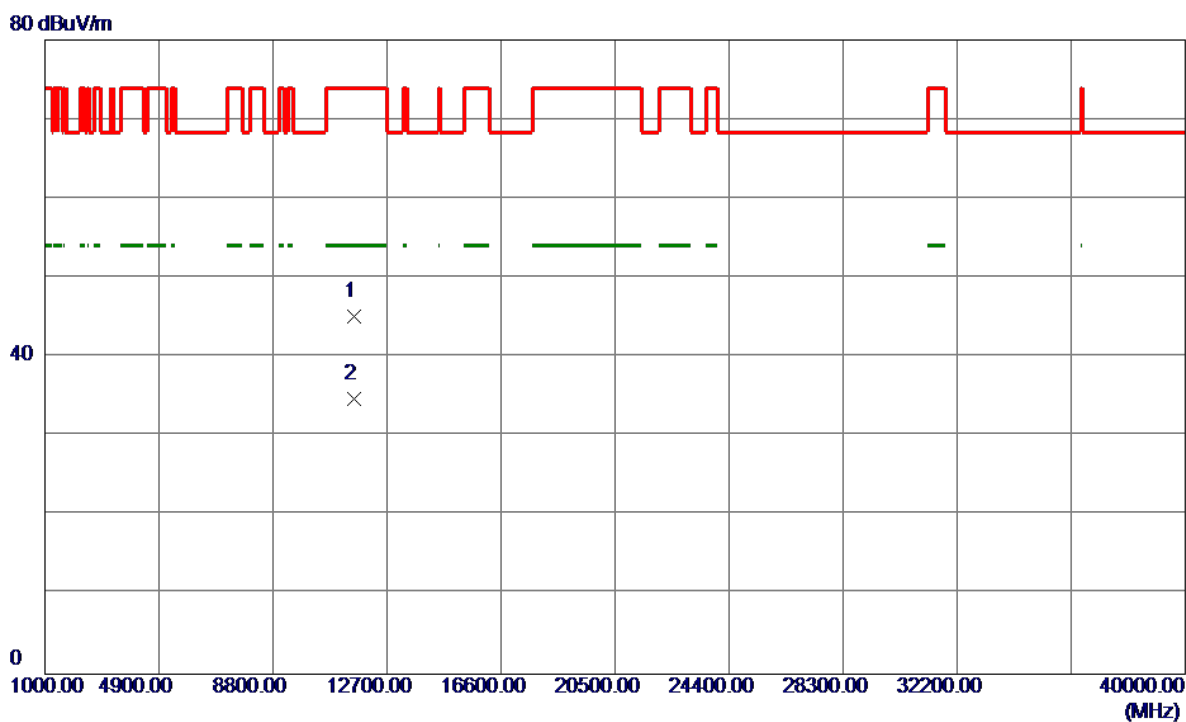

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11560.1800	27.29	17.81	45.10	74.00	-28.90	Peak	
2 *	11578.9200	16.96	17.82	34.78	54.00	-19.22	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Horizontal

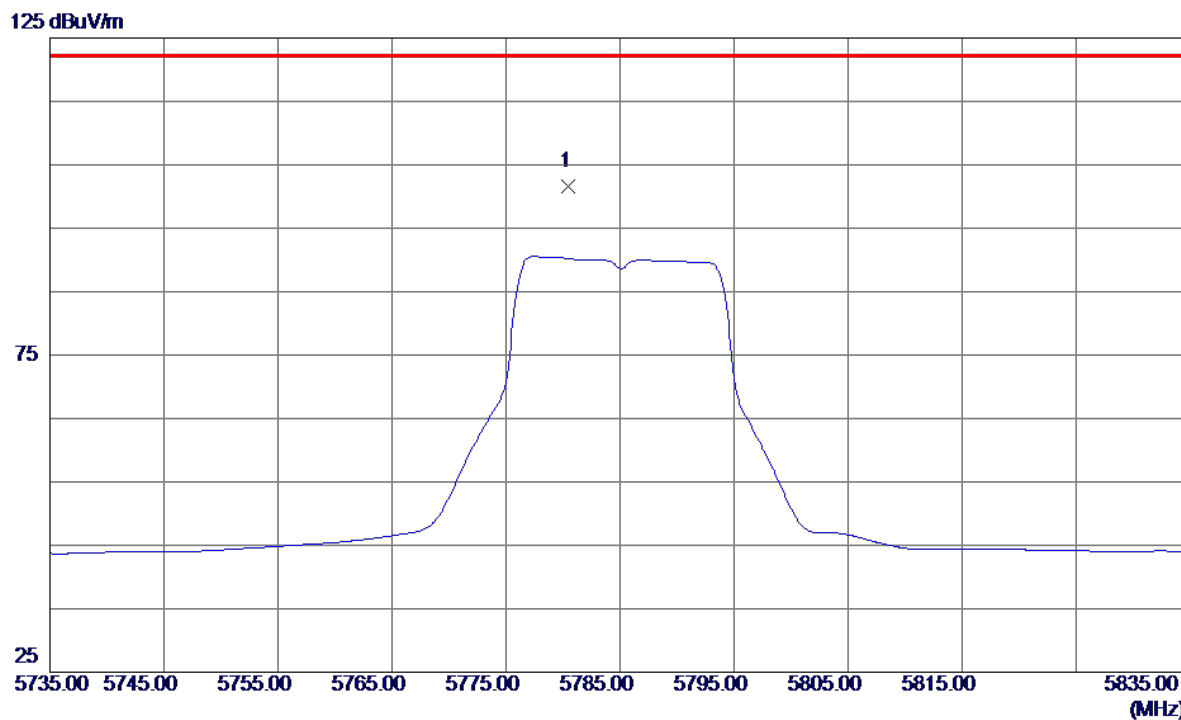


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	5780.5000	57.79	43.73	101.52	122.20	-20.68	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Horizontal


80 dBuV/m

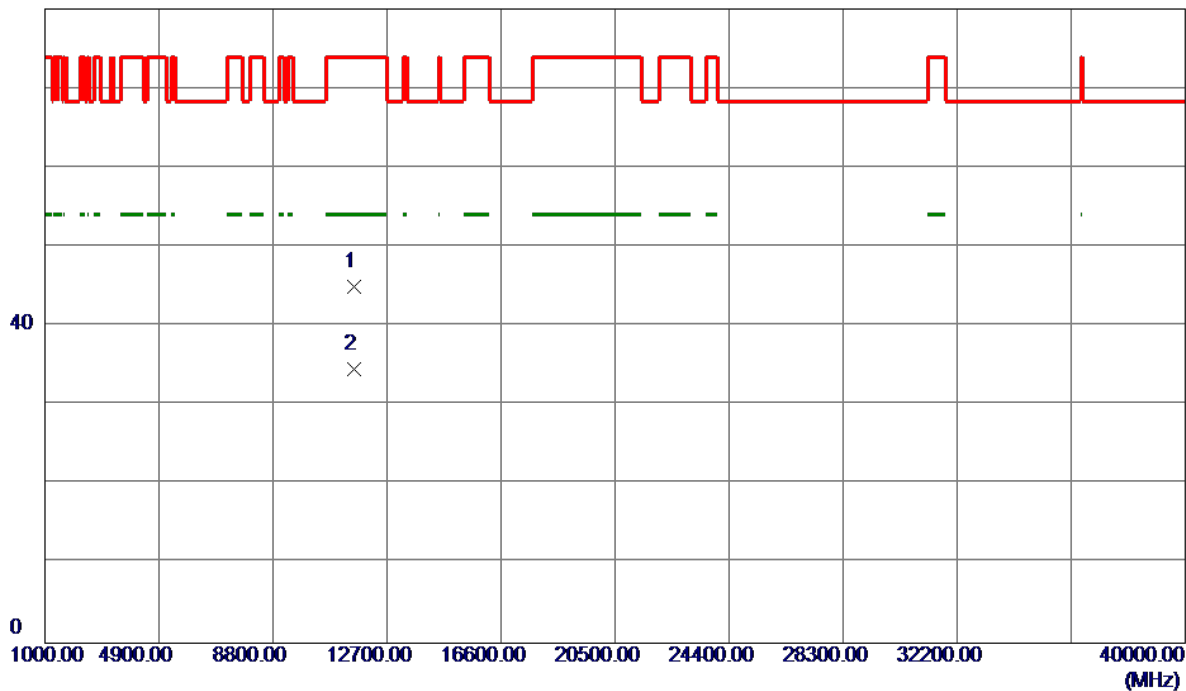

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11560.3600	27.13	17.81	44.94	74.00	-29.06	Peak	
2 *	11565.2400	16.71	17.82	34.53	54.00	-19.47	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Vertical

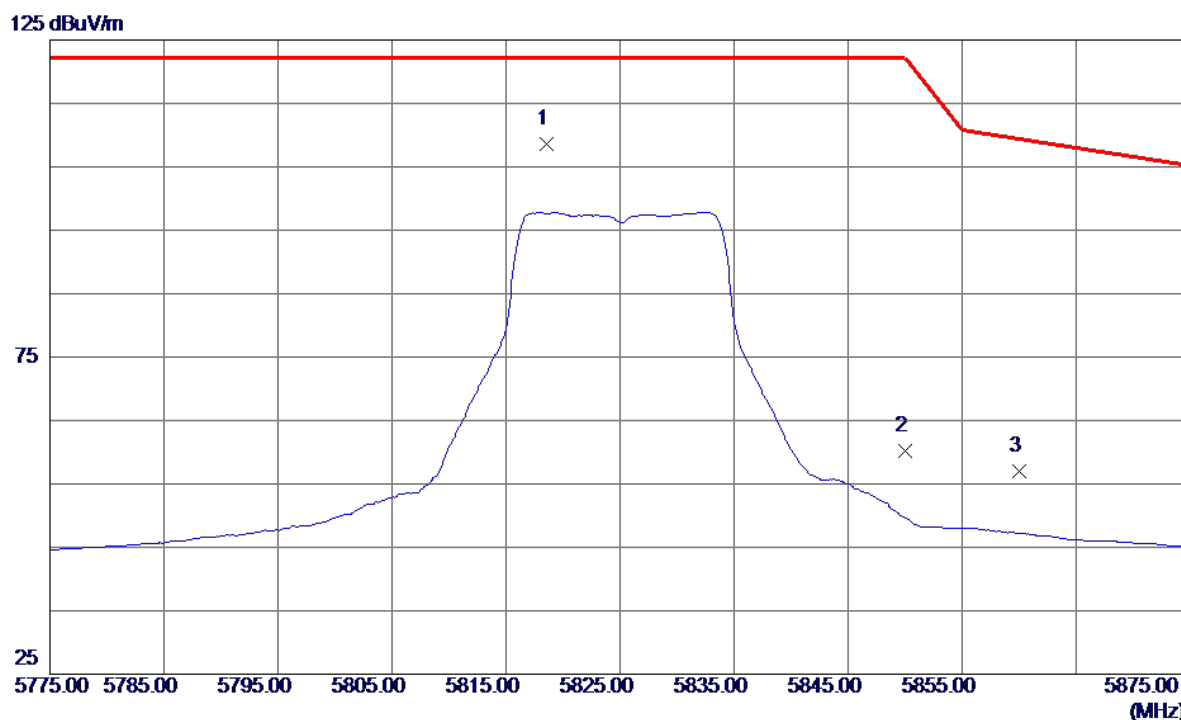

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5818.6000	64.81	43.84	108.65	122.20	-13.55	Peak	
2	5850.0000	16.17	43.94	60.11	122.20	-62.09	Peak	
3	5860.0000	12.97	43.97	56.94	109.40	-52.46	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Vertical

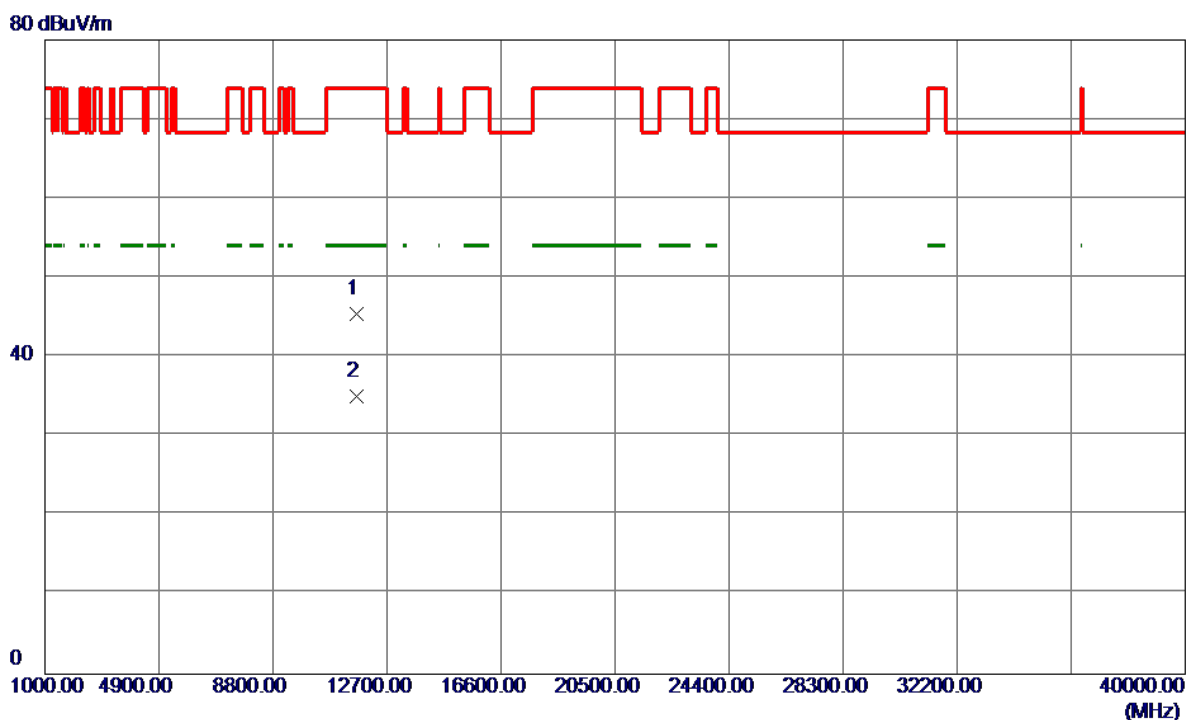

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11653.2800	27.58	17.86	45.44	74.00	-28.56	Peak	
2 *	11655.4200	17.17	17.86	35.03	54.00	-18.97	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Horizontal

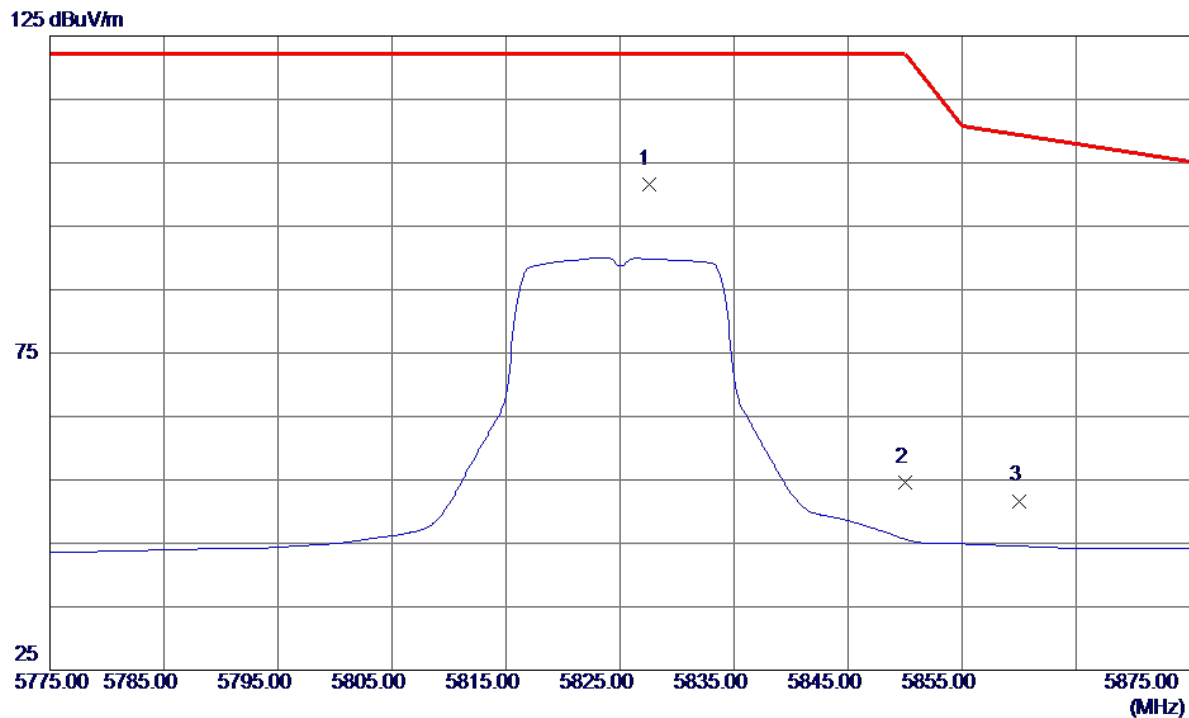

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5827.5000	57.79	43.87	101.66	122.20	-20.54	Peak	
2	5850.0000	10.58	43.94	54.52	122.20	-67.68	Peak	
3	5860.0000	7.73	43.97	51.70	109.40	-57.70	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Horizontal

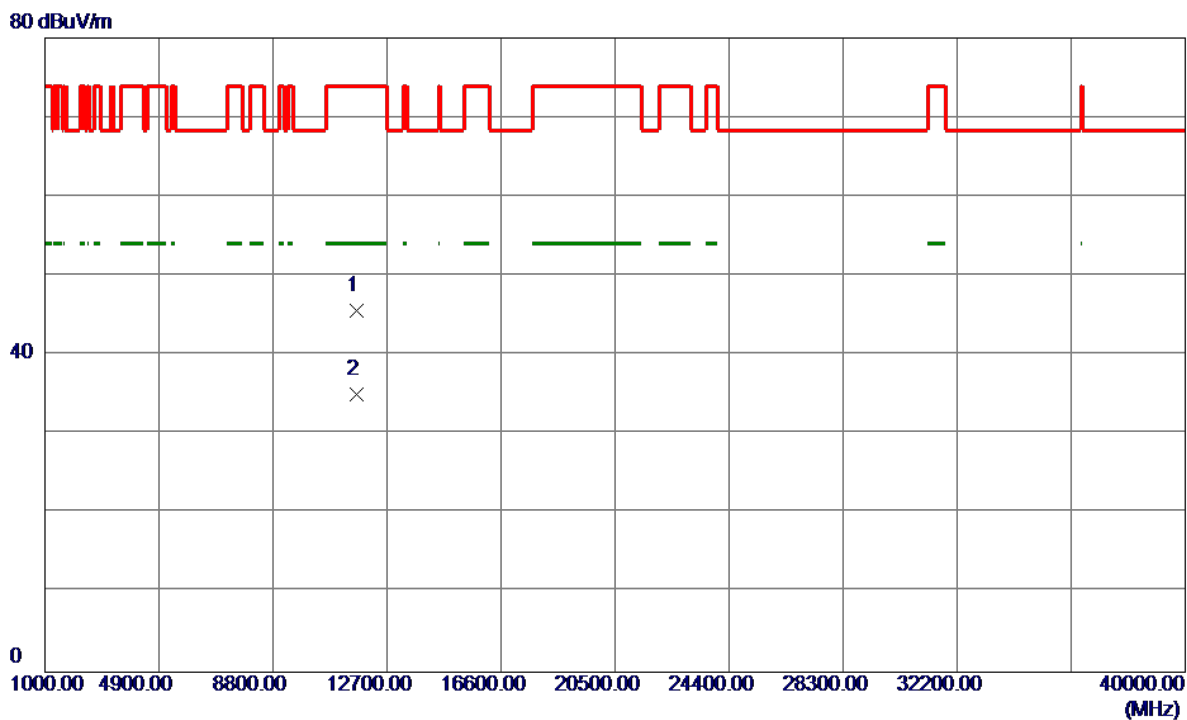

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.9000	27.80	17.86	45.66	74.00	-28.34	Peak	
2 *	11652.4400	17.24	17.86	35.10	54.00	-18.90	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

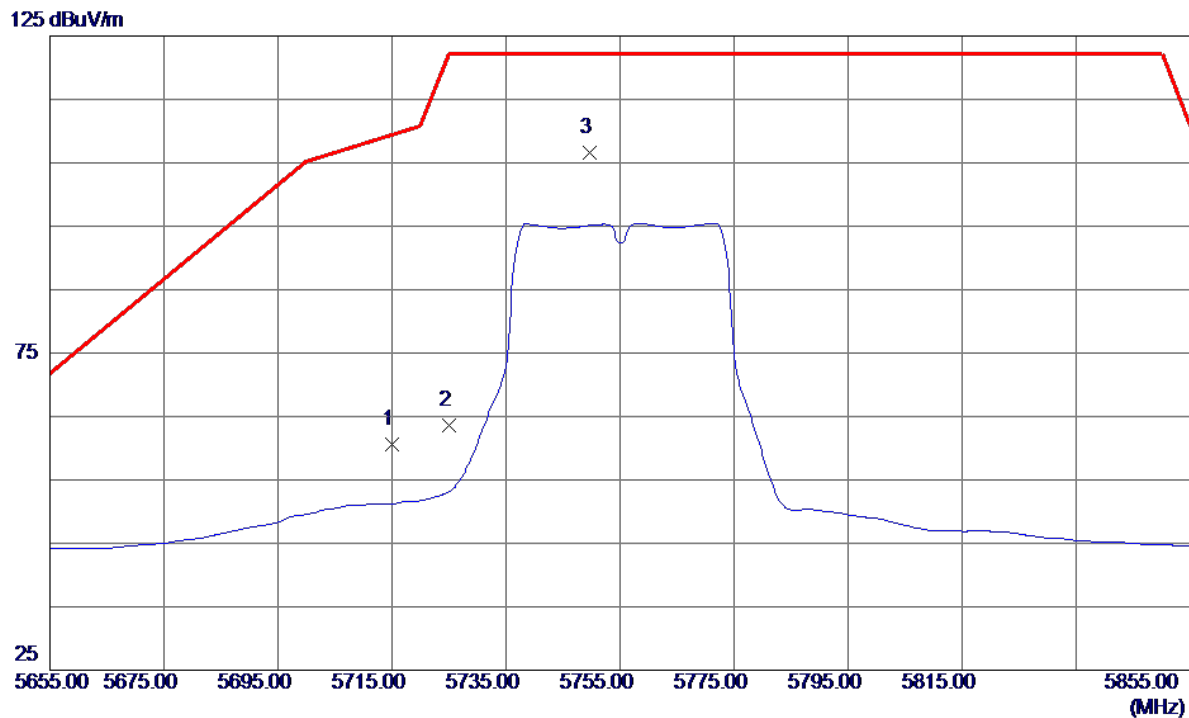

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	17.11	43.53	60.64	109.40	-48.76	Peak	
2	5725.0000	20.05	43.56	63.61	122.20	-58.59	Peak	
3 *	5749.6000	62.99	43.63	106.62	122.20	-15.58	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

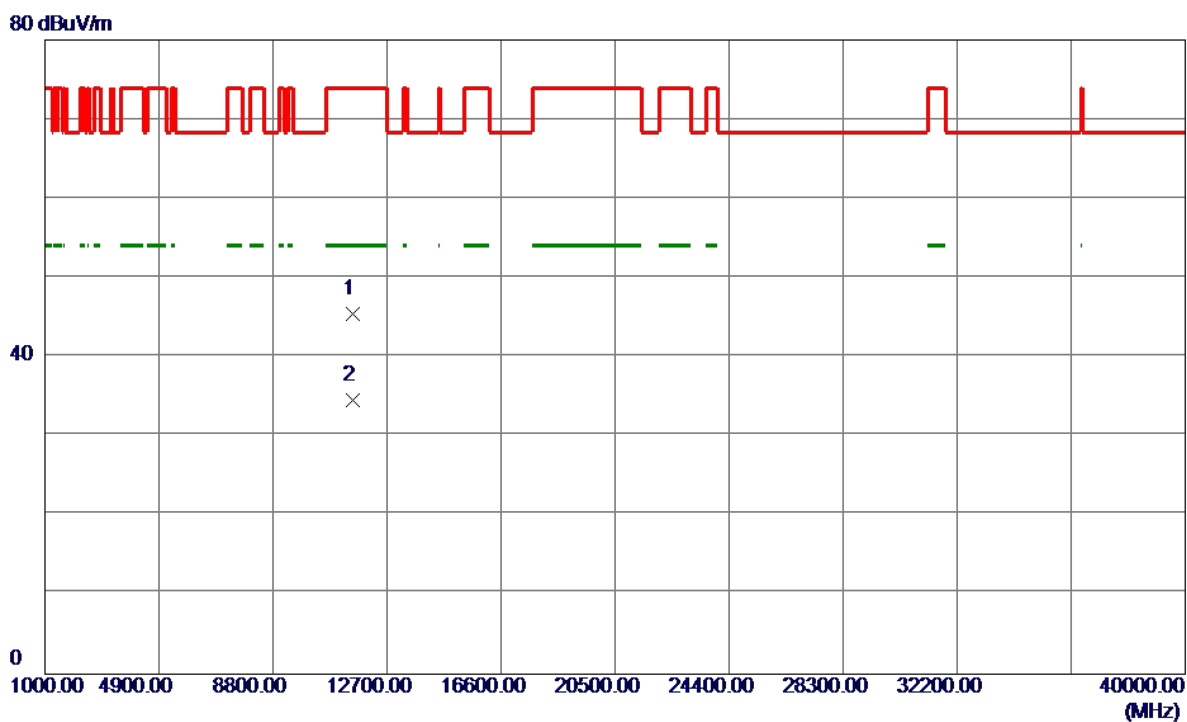

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11519.2200	27.69	17.79	45.48	74.00	-28.52	Peak	
2 *	11519.8000	16.80	17.79	34.59	54.00	-19.41	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

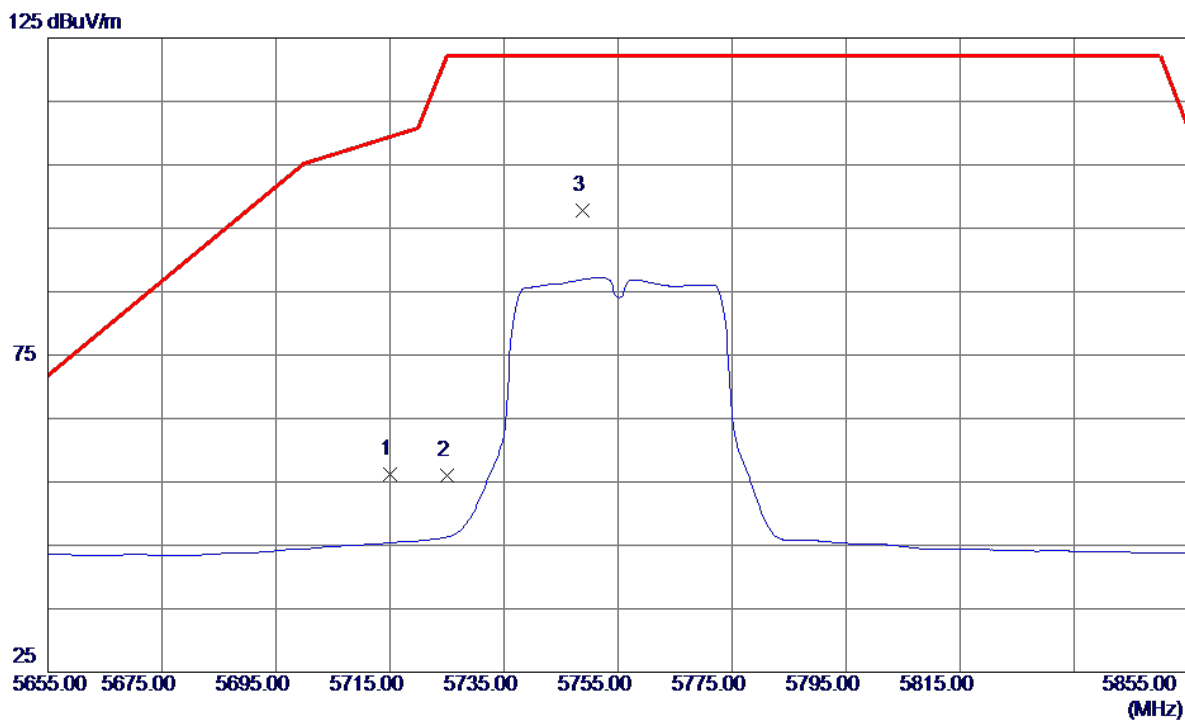

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	12.72	43.53	56.25	109.40	-53.15	Peak	
2	5725.0000	12.44	43.56	56.00	122.20	-66.20	Peak	
3 *	5748.8000	54.18	43.63	97.81	122.20	-24.39	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

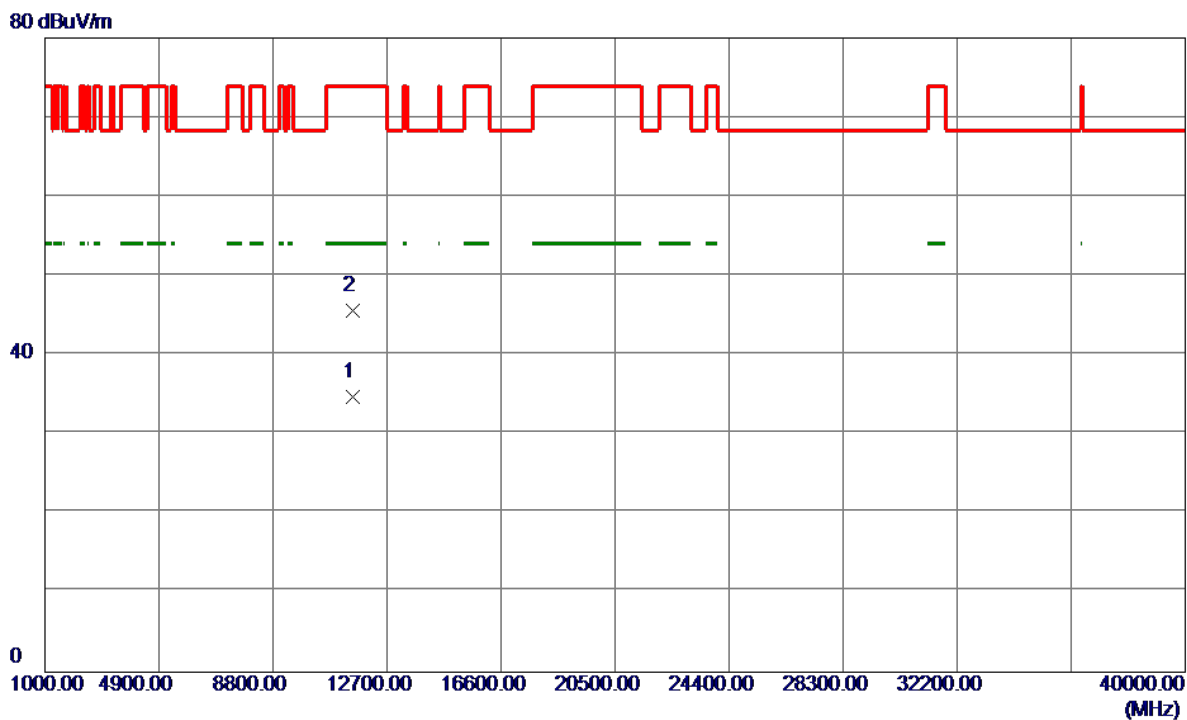

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11508.7800	16.89	17.79	34.68	54.00	-19.32	AVG	
2	11513.0599	27.85	17.79	45.64	74.00	-28.36	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

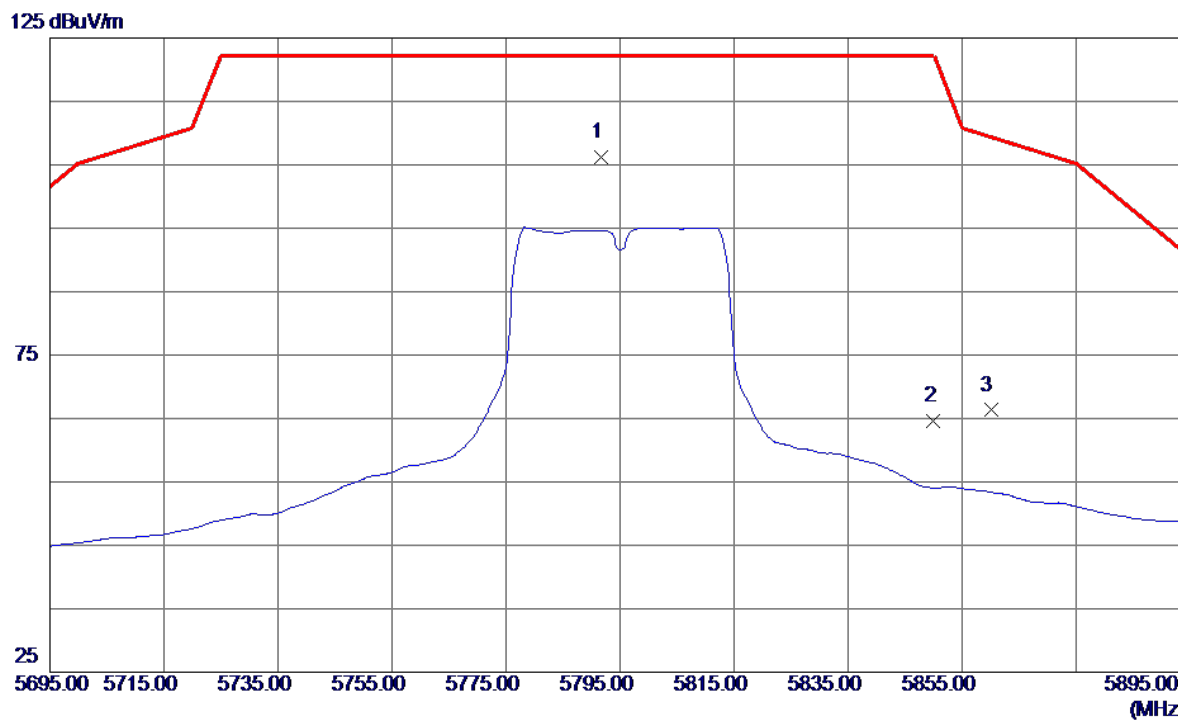

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5791.6000	62.40	43.76	106.16	122.20	-16.04	Peak	
2	5850.0000	20.72	43.94	64.66	122.20	-57.54	Peak	
3	5860.0000	22.33	43.97	66.30	109.40	-43.10	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

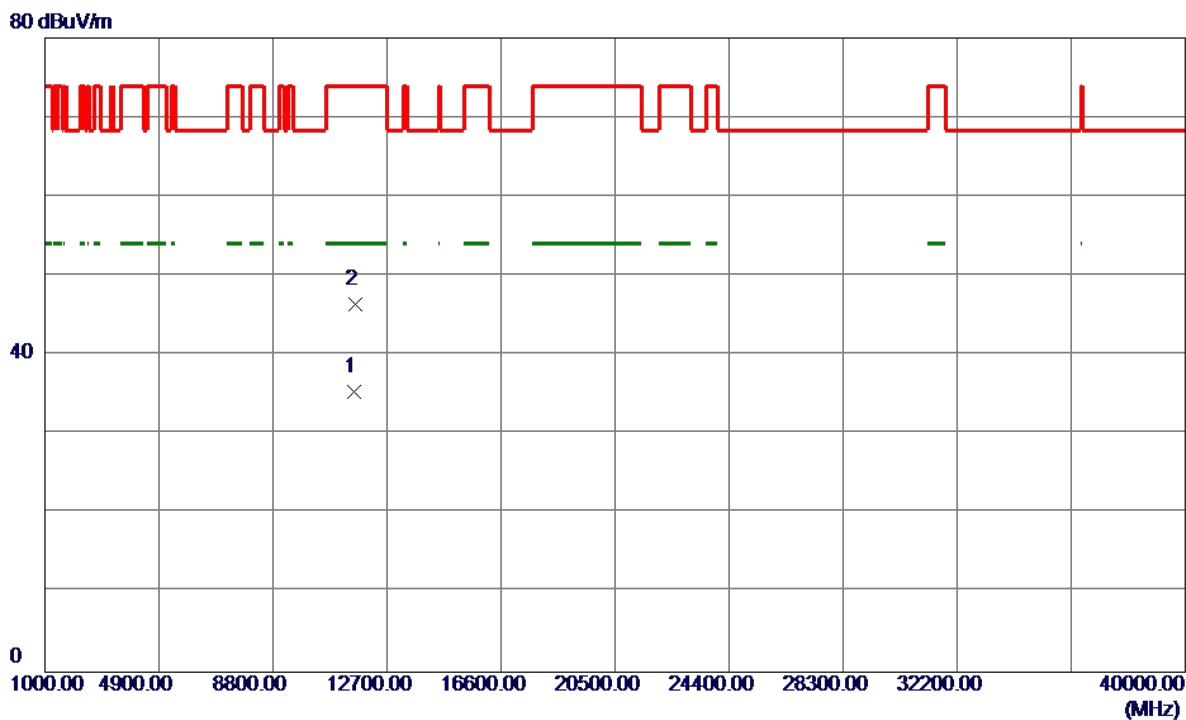

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11589.7800	17.59	17.83	35.42	54.00	-18.58	AVG	
2	11595.7800	28.57	17.83	46.40	74.00	-27.60	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

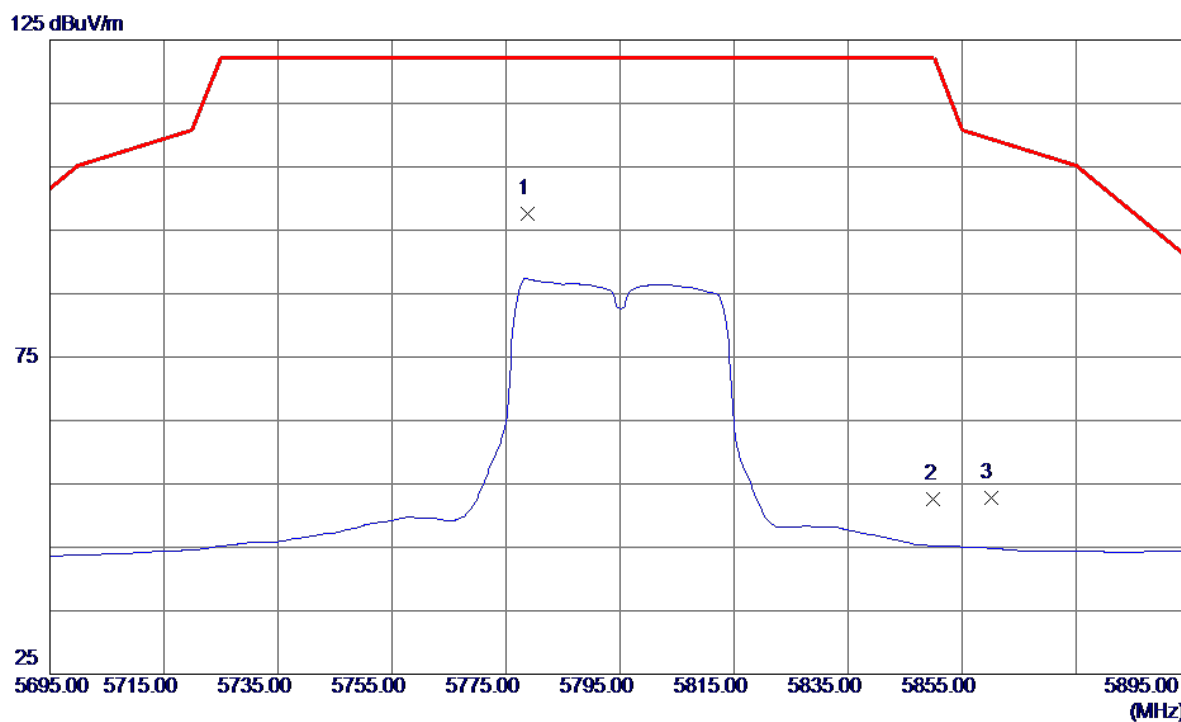

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5778.8000	53.96	43.72	97.68	122.20	-24.52	Peak	
2	5850.0000	8.72	43.94	52.66	122.20	-69.54	Peak	
3	5860.0000	8.87	43.97	52.84	109.40	-56.56	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

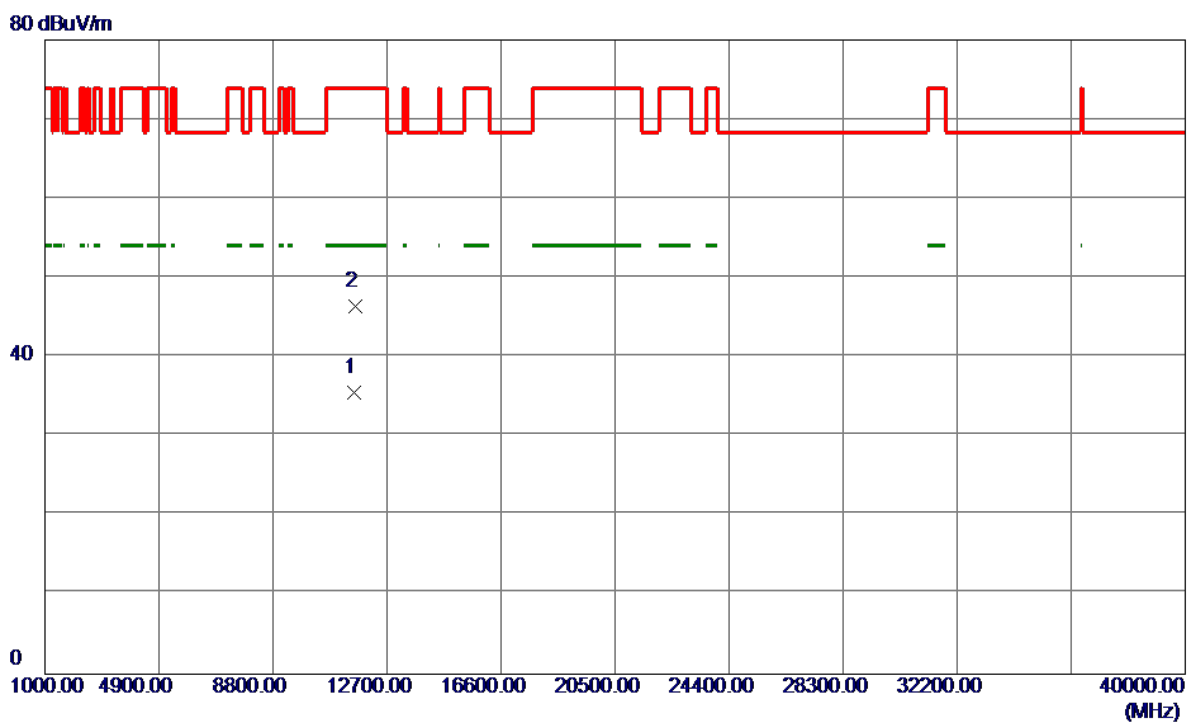

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11591.0599	17.65	17.83	35.48	54.00	-18.52	AVG	
2	11595.2000	28.52	17.83	46.35	74.00	-27.65	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

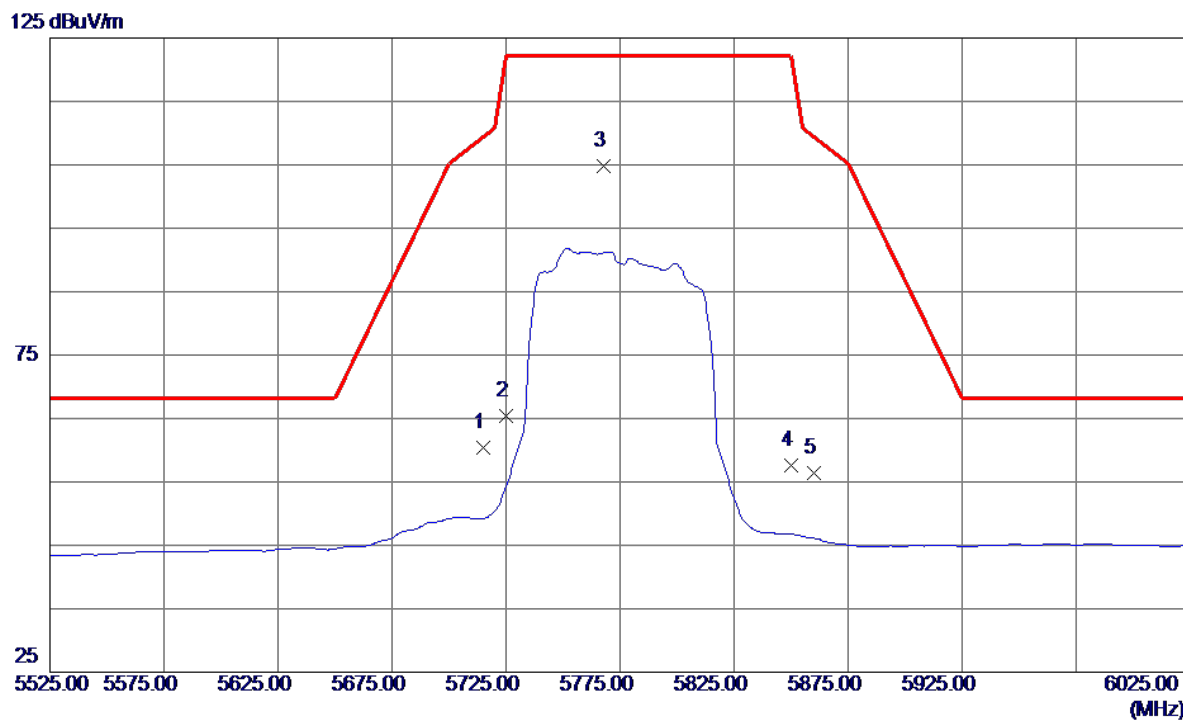

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	16.90	43.53	60.43	109.40	-48.97	Peak	
2	5725.0000	21.80	43.56	65.36	122.20	-56.84	Peak	
3 *	5768.0000	61.07	43.69	104.76	122.20	-17.44	Peak	
4	5850.0000	13.61	43.94	57.55	122.20	-64.65	Peak	
5	5860.0000	12.41	43.97	56.38	109.40	-53.02	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

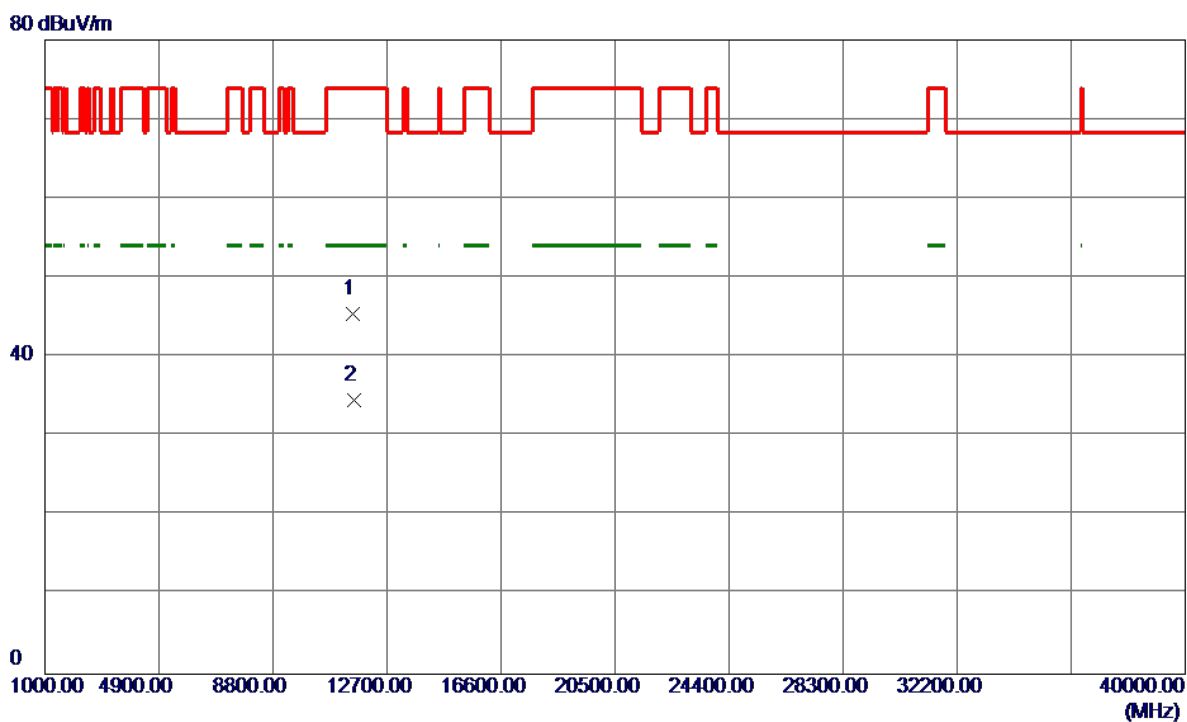

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11548.6600	27.61	17.81	45.42	74.00	-28.58	Peak	
2 *	11553.4000	16.82	17.81	34.63	54.00	-19.37	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

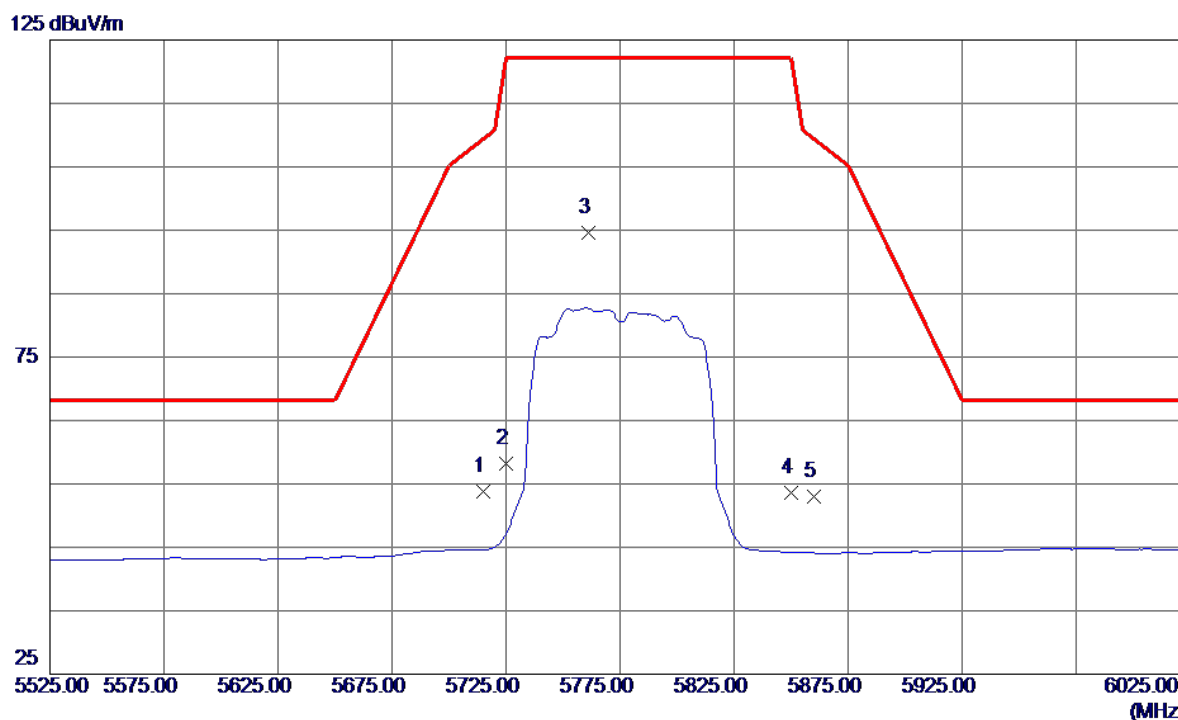

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	10.21	43.53	53.74	109.40	-55.66	Peak	
2	5725.0000	14.70	43.56	58.26	122.20	-63.94	Peak	
3 *	5761.0000	50.95	43.67	94.62	122.20	-27.58	Peak	
4	5850.0000	9.74	43.94	53.68	122.20	-68.52	Peak	
5	5860.0000	8.99	43.97	52.96	109.40	-56.44	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

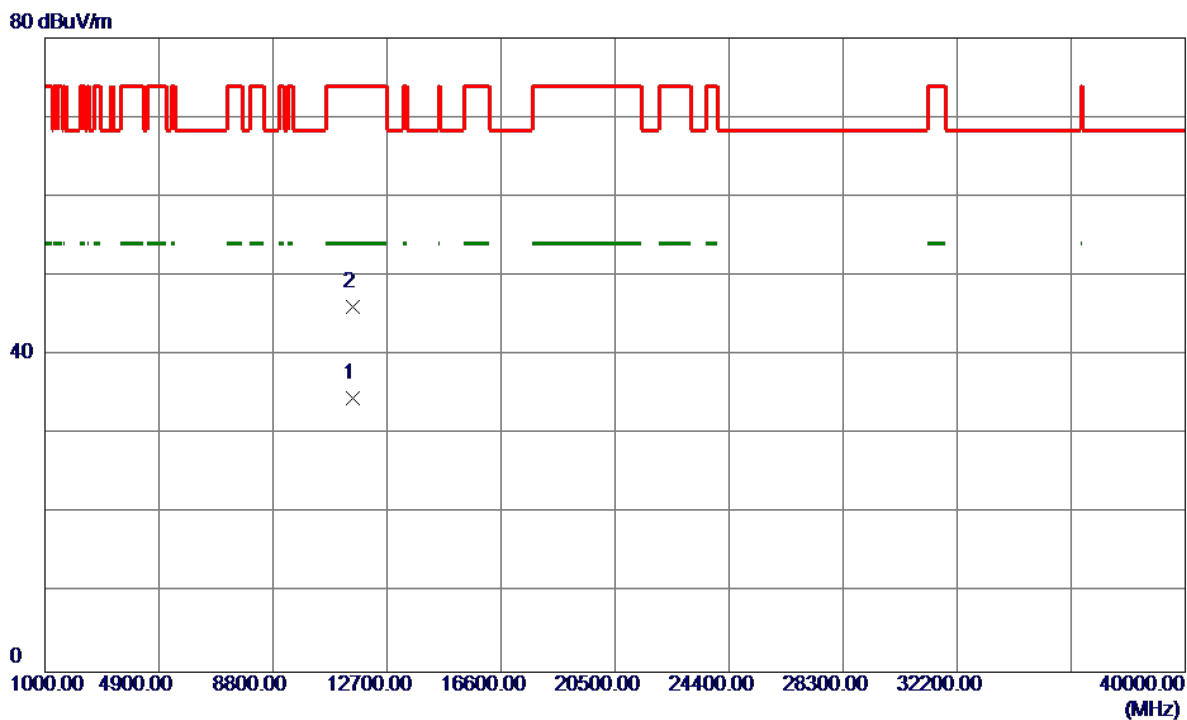

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11542.5400	16.82	17.81	34.63	54.00	-19.37	AVG	
2	11542.7800	28.29	17.81	46.10	74.00	-27.90	Peak	

TX A Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 2.05 msec

T_{Total} : 2.10 msec

Duty cycle: 97.62%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.10

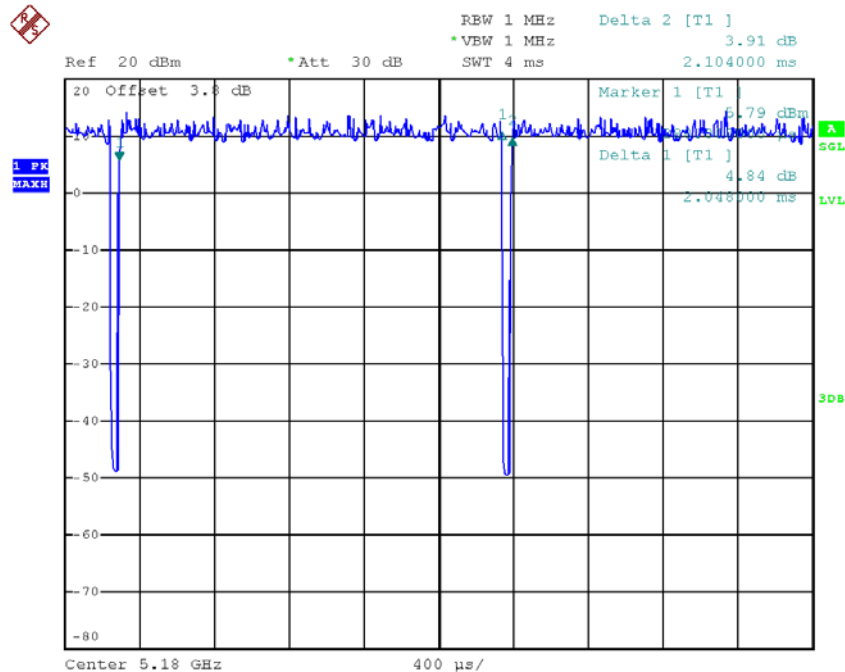

Date: 16.MAR.2018 14:53:59

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducy factor
 Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 1.91 msec

T_{Total} : 1.96 msec

Duty cycle: 97.45%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.11

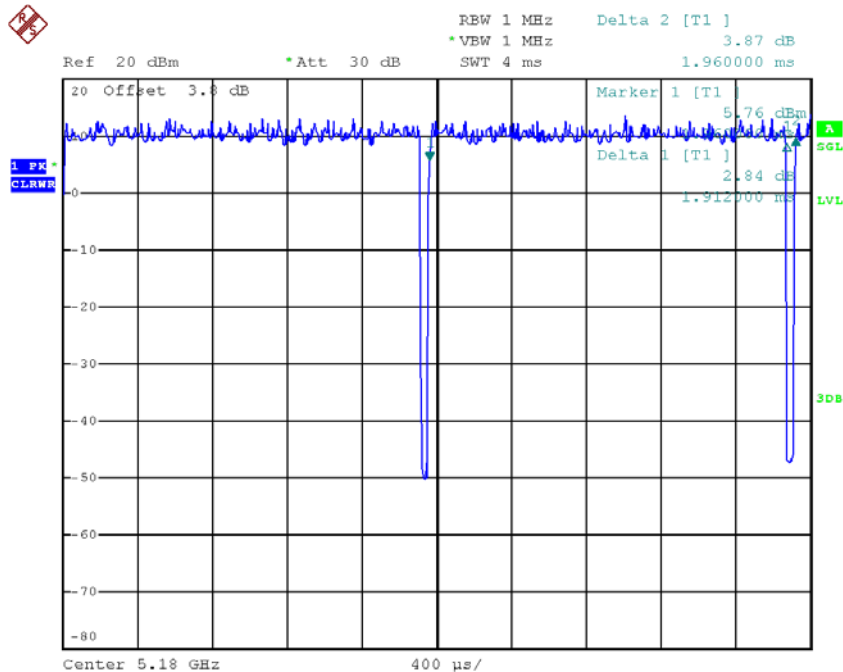

Date: 16.MAR.2018 14:56:58

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.91 msec

T_{Total} : 0.98 msec

Duty cycle: 92.86%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.32

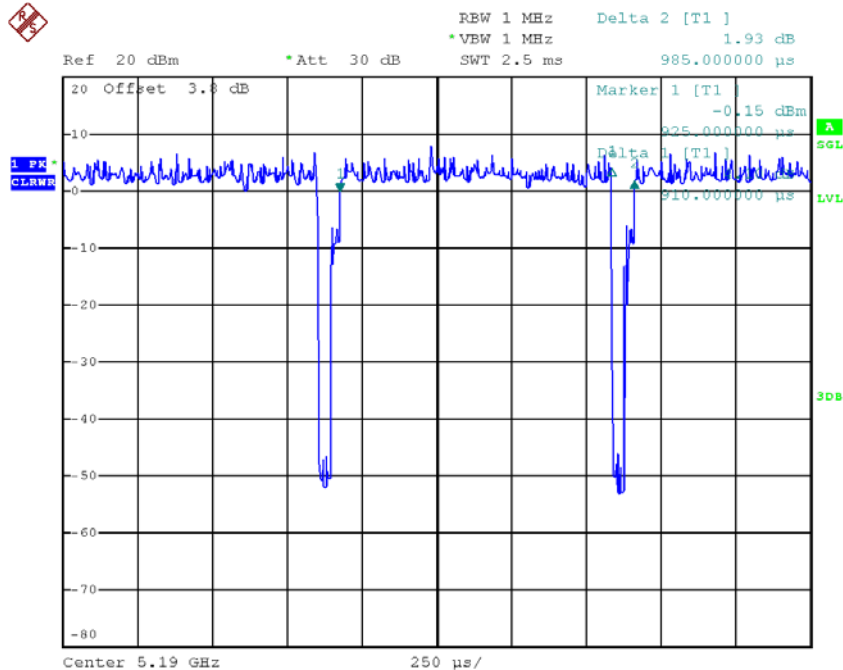

Date: 16.MAR.2018 14:58:40

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.98 msec

T_{Total} : 1.03 msec

Duty cycle: 95.15%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.22

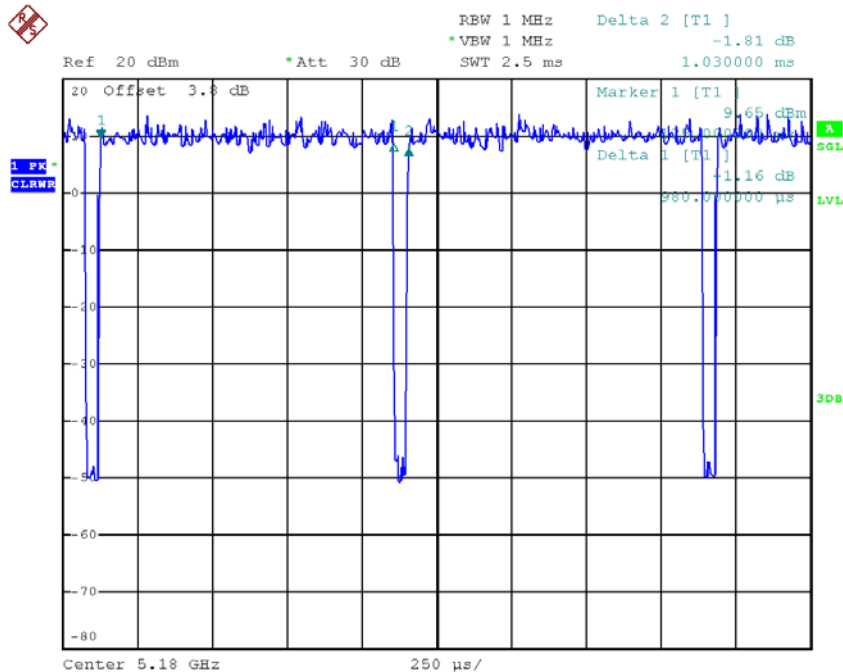

Date: 16.MAR.2018 14:57:44

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducy factor
 Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.46 msec

T_{Total} : 0.54 msec

Duty cycle: 85.19%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.70

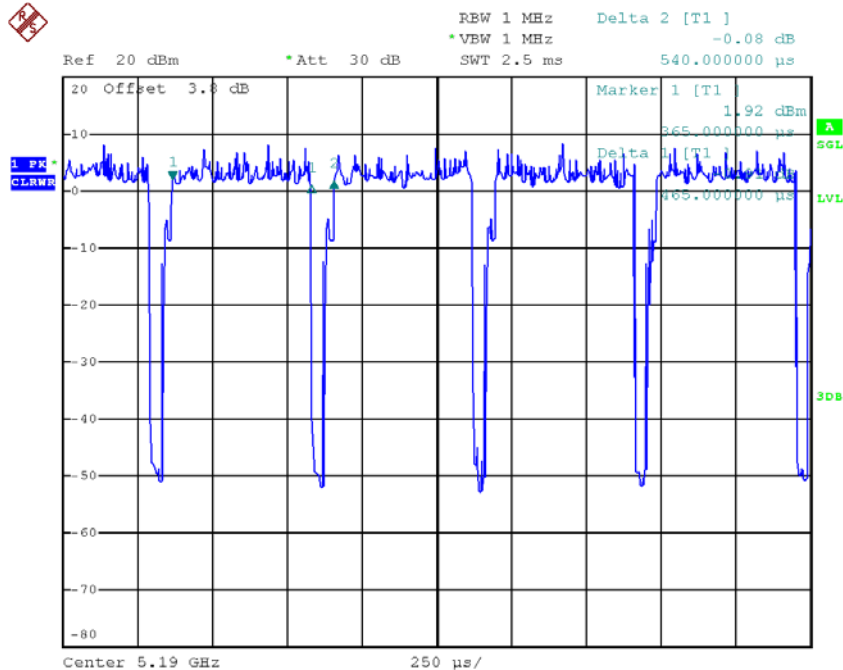

Date: 16.MAR.2018 15:01:06

Note: The EUT was programmed to be in countinuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducy factor
Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.22 msec

T_{Total} : 0.30 msec

Duty cycle: 73.33%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 1.35

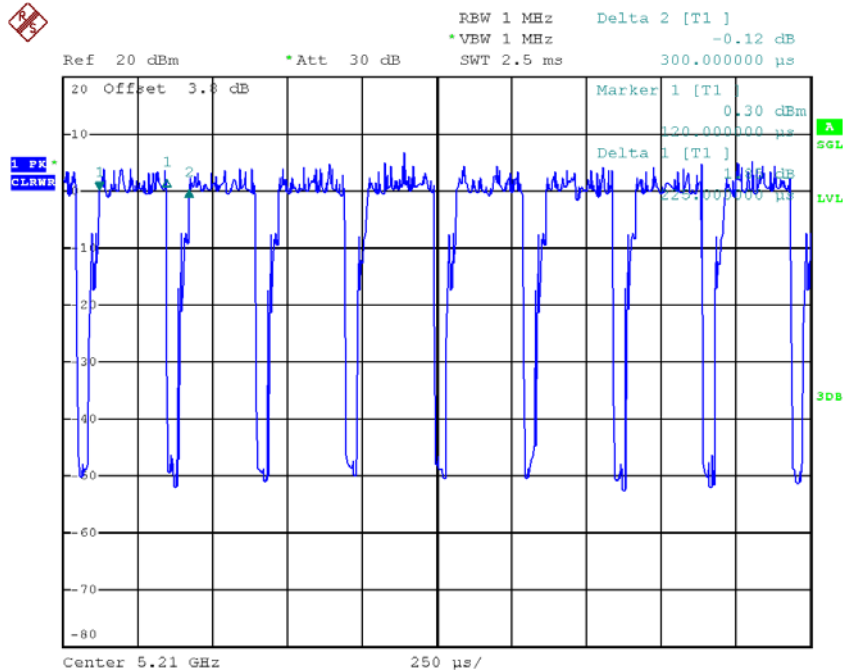

Date: 16.MAR.2018 15:21:06

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducy factor
 Power Spectral Density = Measured density + Duty factor

TX AC160 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.22 msec

T_{Total} : 0.30 msec

Duty cycle: 786.44%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.63

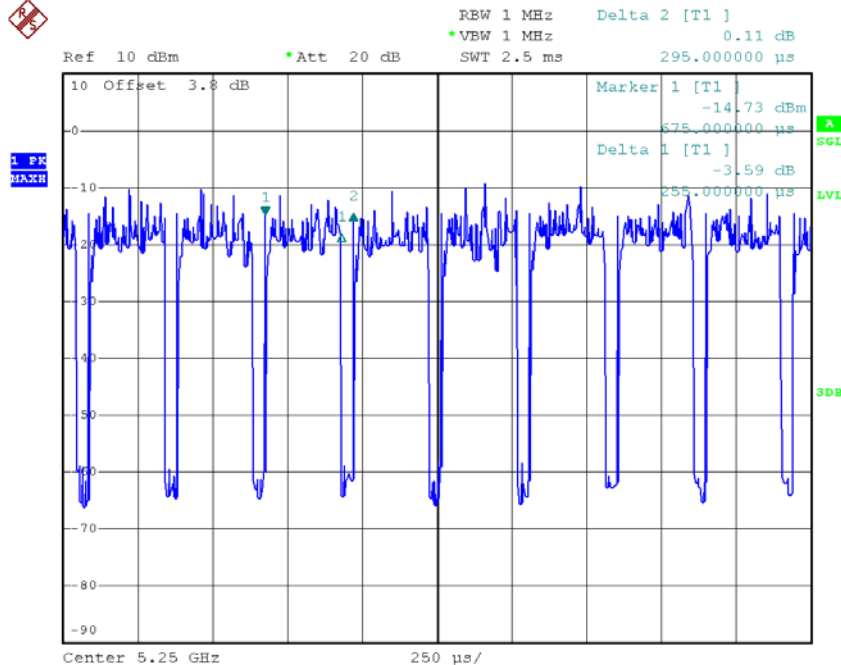

Date: 23.MAR.2018 17:12:22


Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as
 Output Power = Measured power + Ducy factor
 Power Spectral Density = Measured density + Duty factor

APPENDIX E - BANDWIDTH

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	24.25	17.20
CH40	5200	24.55	17.10
CH48	5240	24.00	17.10

TX CH36

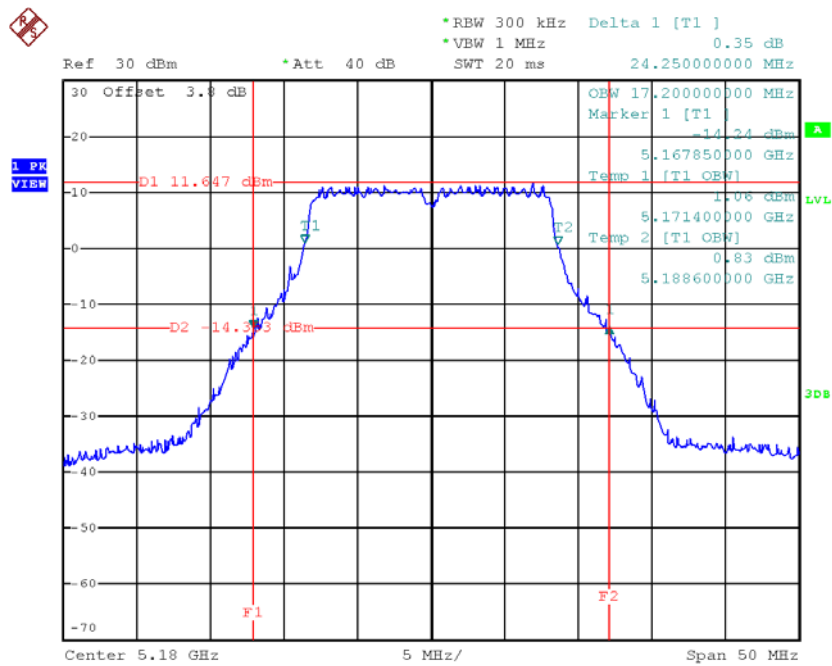


Date: 16.MAR.2018 15:29:47

TX CH40

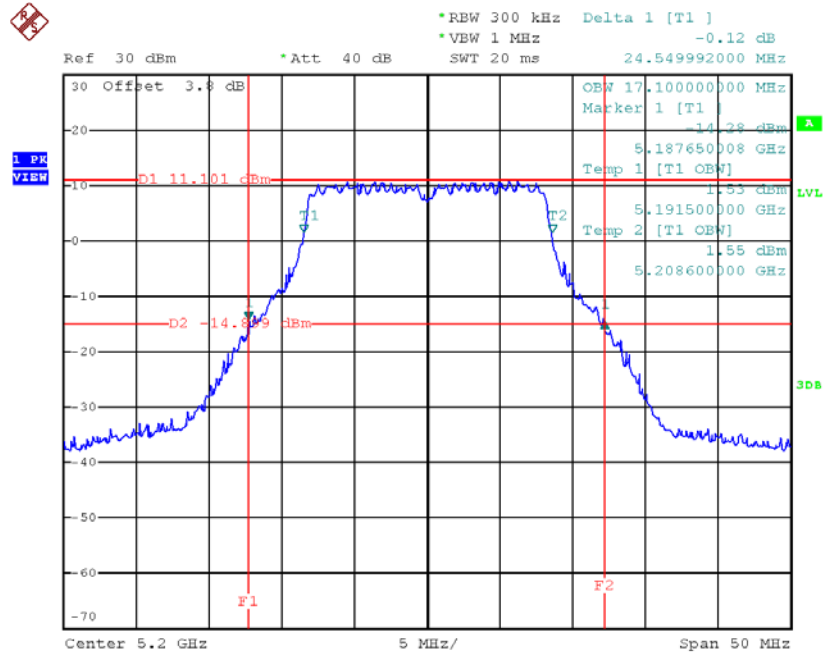

Date: 16.MAR.2018 15:32:34

TX CH48

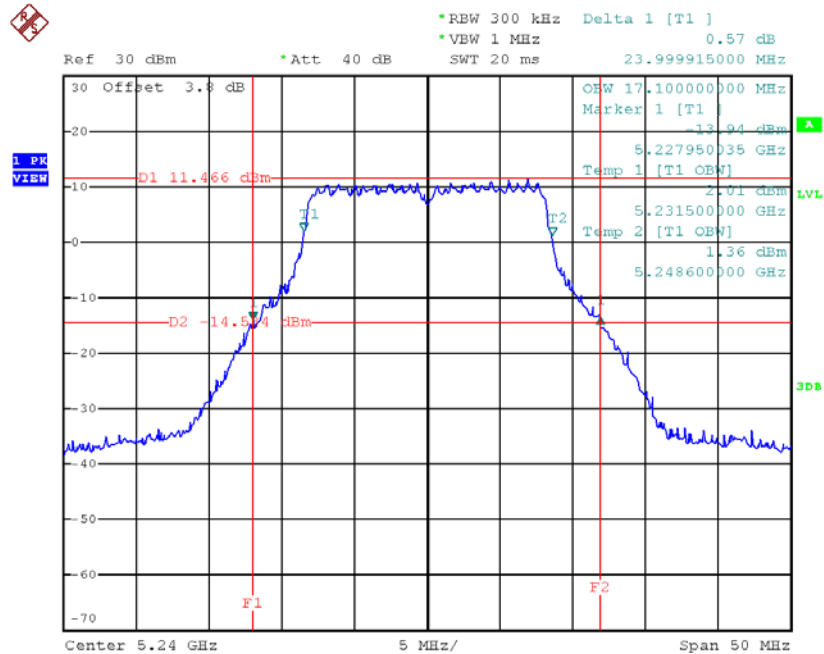

Date: 16.MAR.2018 15:33:38

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	24.65	18.20
CH40	5200	25.45	18.20
CH48	5240	24.59	18.20

*RBW 300 kHz Delta 1 [T1]
 *VBW 1 MHz 0.46 dB
 *Att 40 dB
 Ref 30 dBm
 SWT 20 ms 24.65000000 MHz


30 Offset 3.0 dB
 OBW 18.200000000 MHz
 Marker 1 [T1]
 -14.06 dBm
 5.167650000 GHz
 Temp 1 [T1 OBW]
 2.92 dBm
 5.170900000 GHz
 Temp 2 [T1 OBW]
 2.87 dBm
 5.189100000 GHz

D1 11.895 dBm
 D2 -14.06 dBm
 F1
 F2

Center 5.18 GHz 5 MHz/ Span 50 MHz


Date: 16.MAR.2018 15:53:08

TX CH40

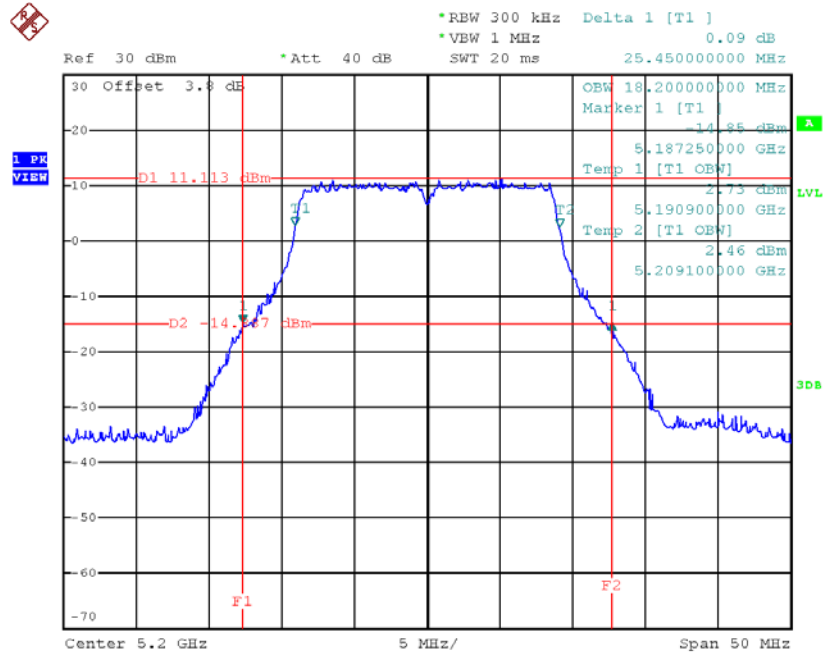

Date: 16.MAR.2018 15:55:29

TX CH48

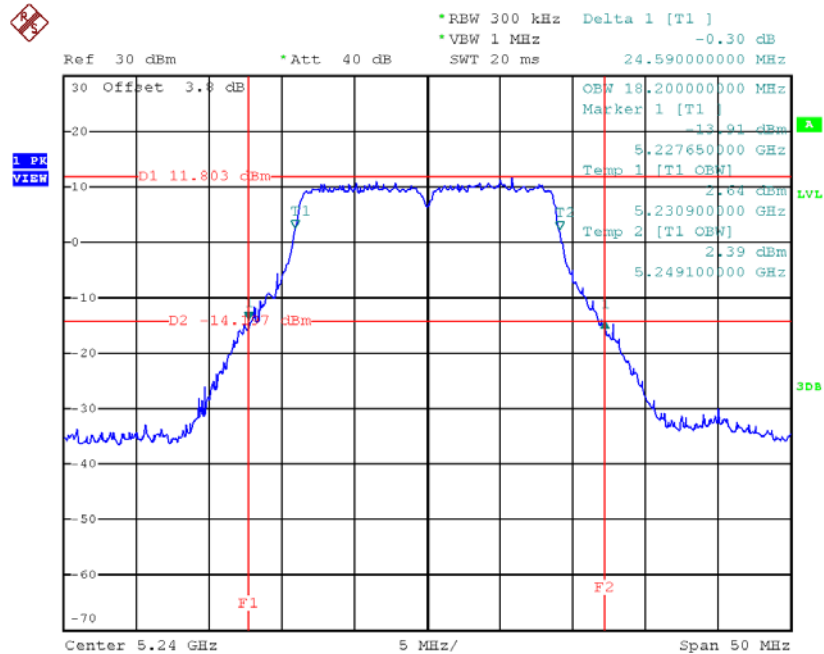


Date: 16.MAR.2018 15:56:32

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	45.10	37.20
CH46	5230	44.59	37.00

TX CH38

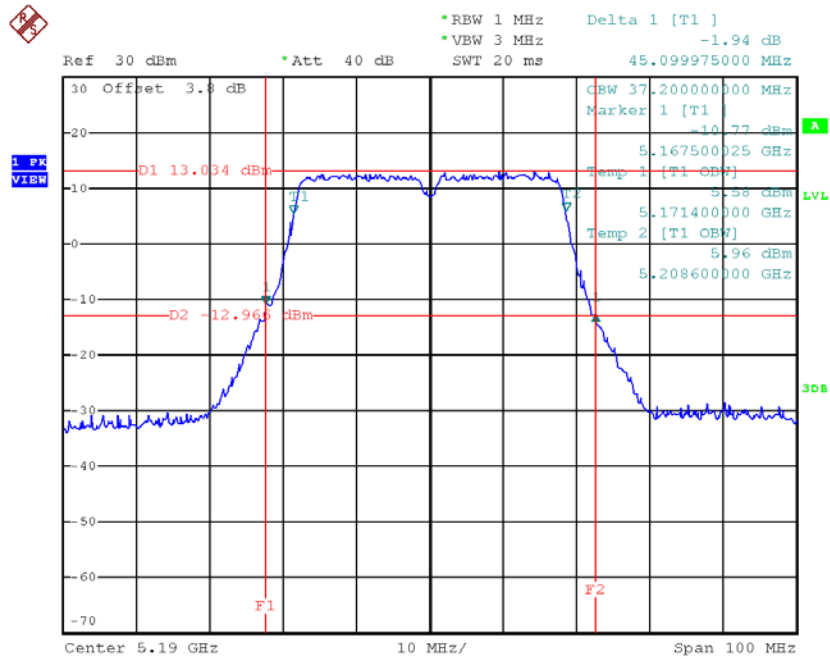

Date: 16.MAR.2018 16:30:30

TX CH46

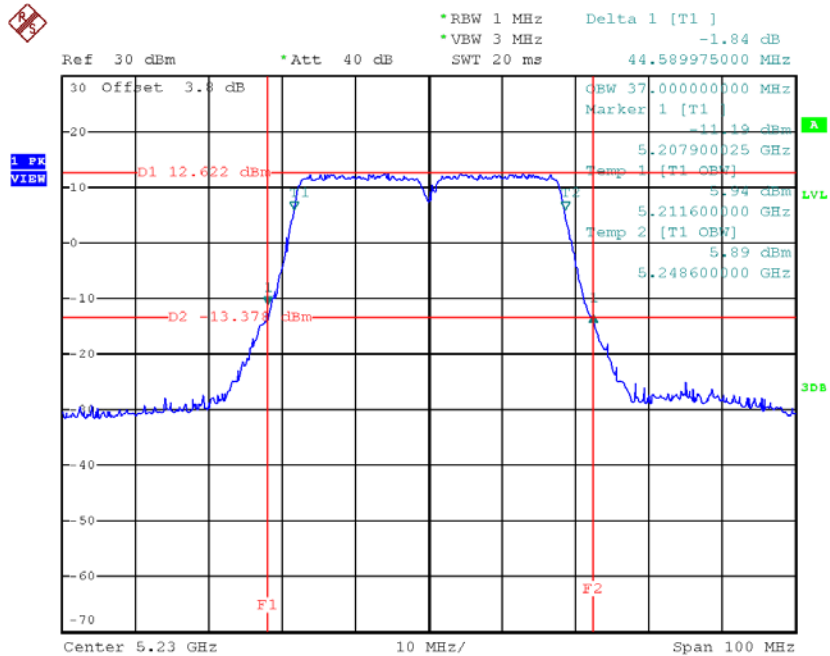


Date: 16.MAR.2018 16:31:49

Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	24.70	17.10
CH60	5300	24.19	17.10
CH64	5320	25.00	17.10


Note: The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26 dB emission bandwidth in megahertz.

TX CH52

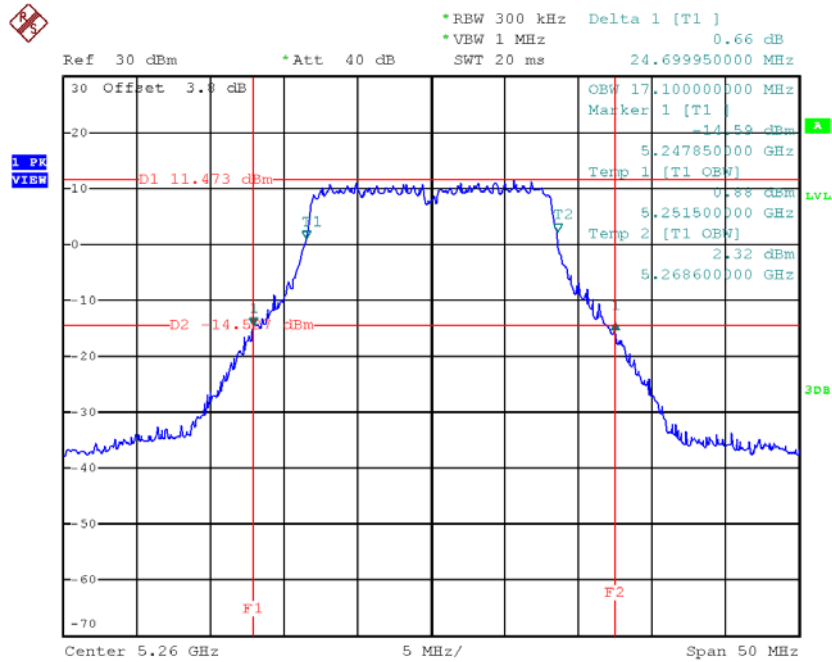


Date: 16.MAR.2018 15:34:57

TX CH60

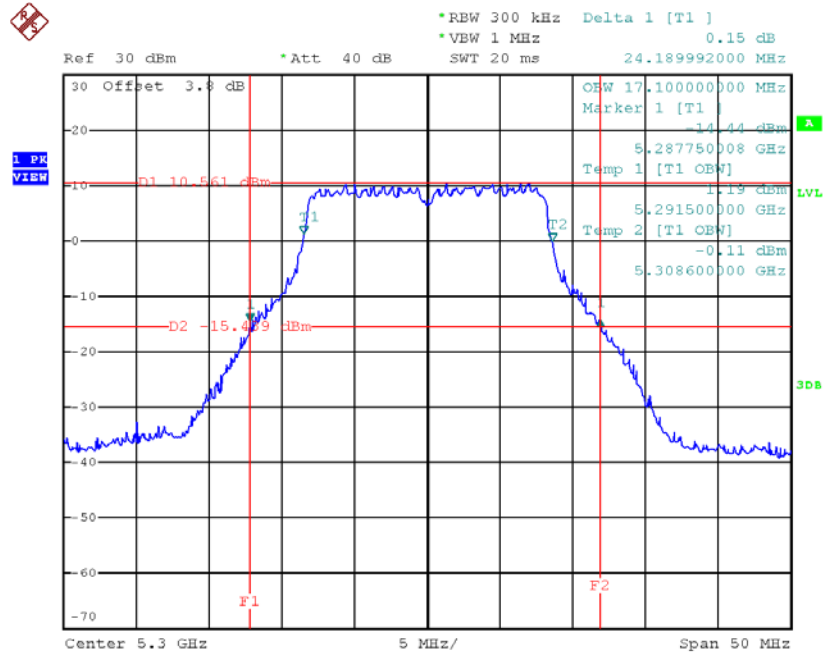

Date: 16.MAR.2018 15:36:20

TX CH64

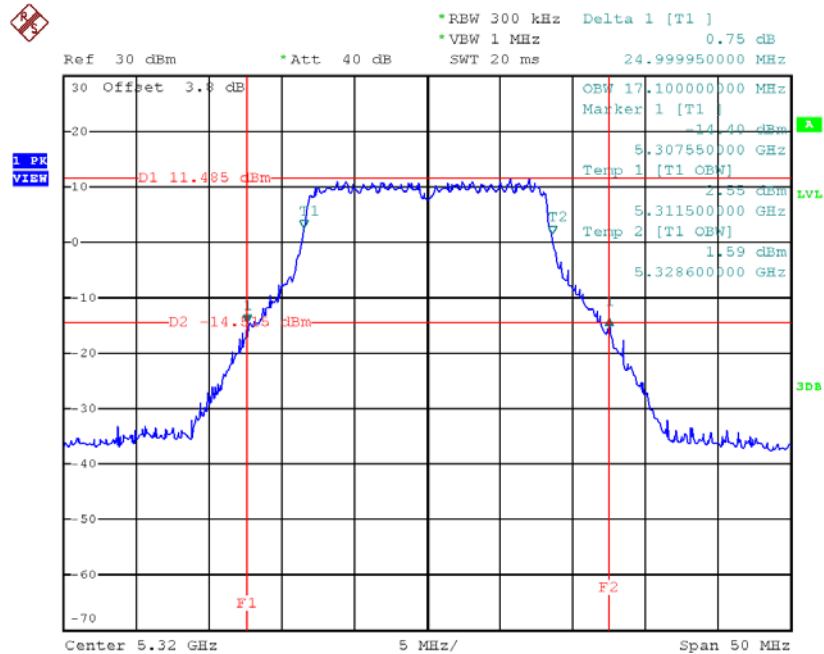


Date: 16.MAR.2018 15:38:34

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	25.05	18.20
CH60	5300	25.10	18.30
CH64	5320	25.25	18.30


Note: The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26 dB emission bandwidth in megahertz.

TX CH52

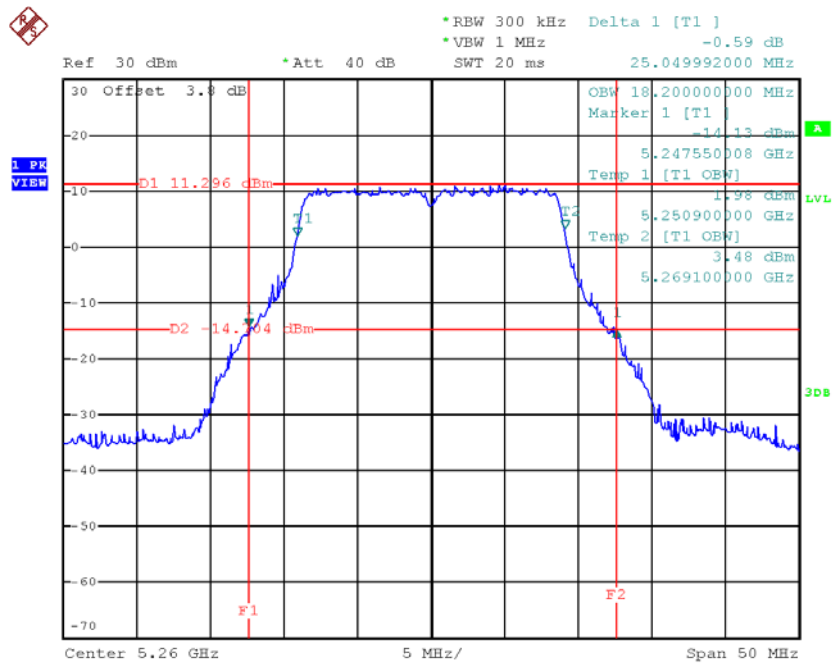


Date: 16.MAR.2018 15:57:40

TX CH60

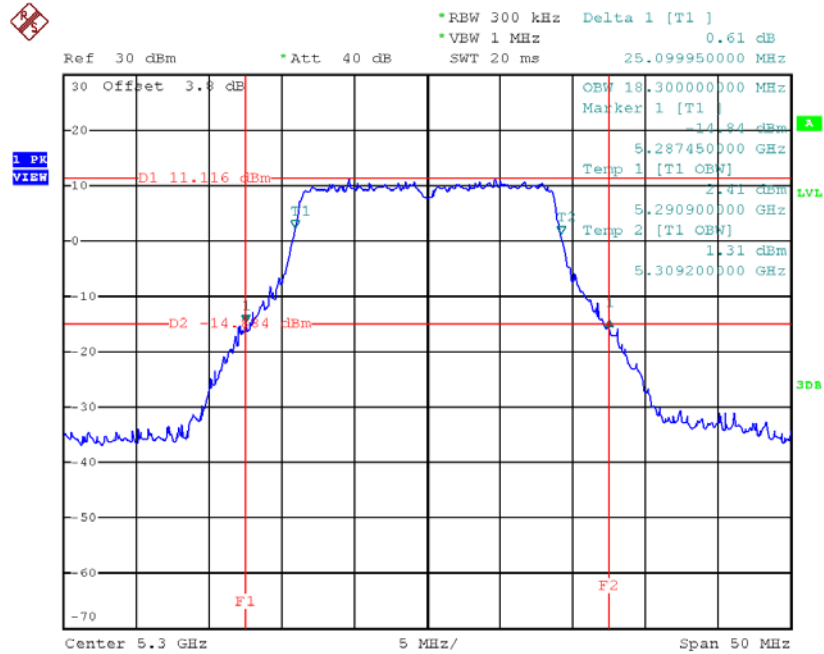

Date: 16.MAR.2018 15:58:56

TX CH64

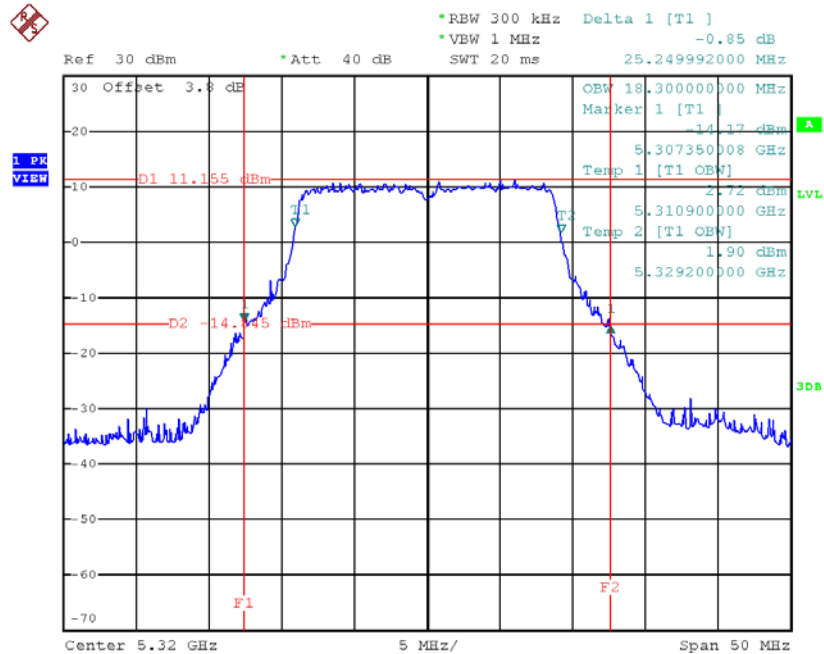


Date: 16.MAR.2018 15:59:58

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	44.79	37.20
CH62	5310	44.19	37.20


Note: The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10\log B$, where B is the 26 dB emission bandwidth in megahertz.

TX CH54

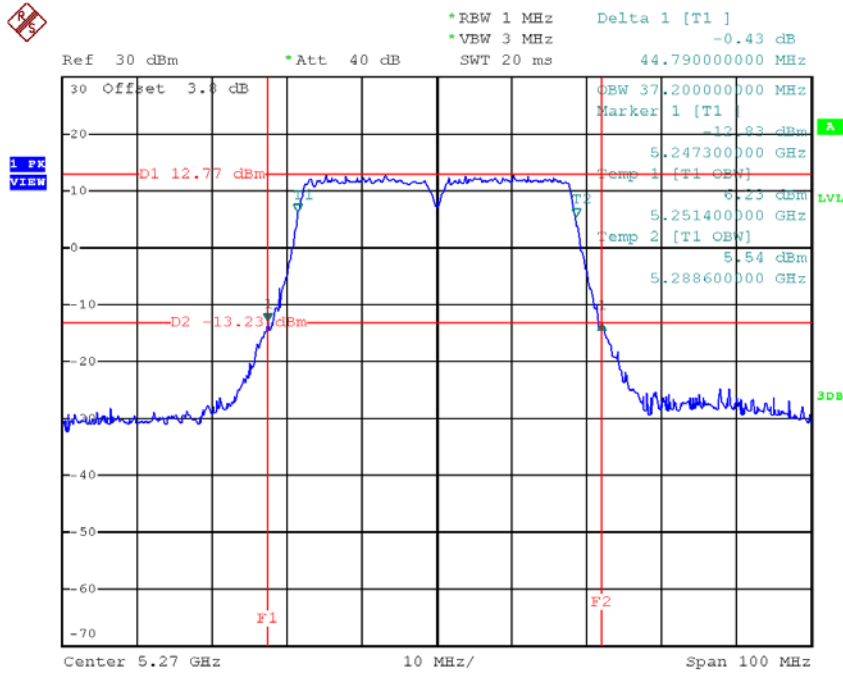

Date: 16.MAR.2018 16:33:23

TX CH62

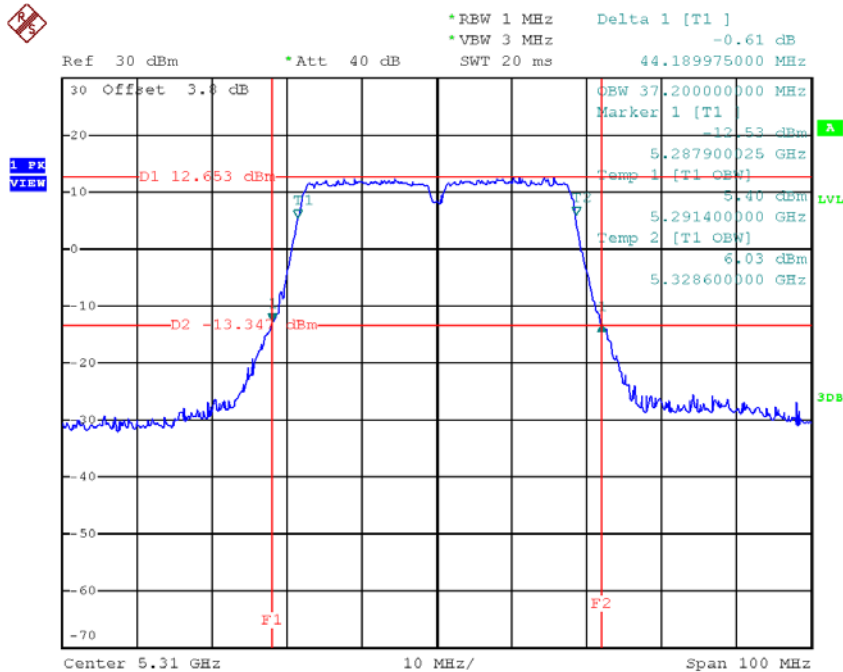


Date: 16.MAR.2018 16:34:59

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	24.05	17.00
CH116	5580	24.25	17.20
CH140	5700	23.80	17.10


Note: The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26 dB emission bandwidth in megahertz.

TX CH100

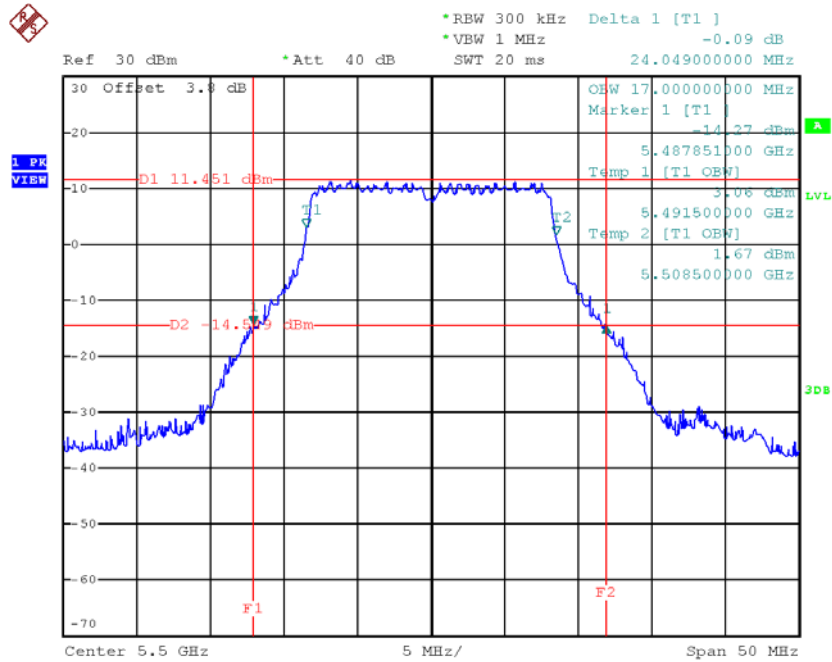


Date: 16.MAR.2018 15:40:56

TX CH116

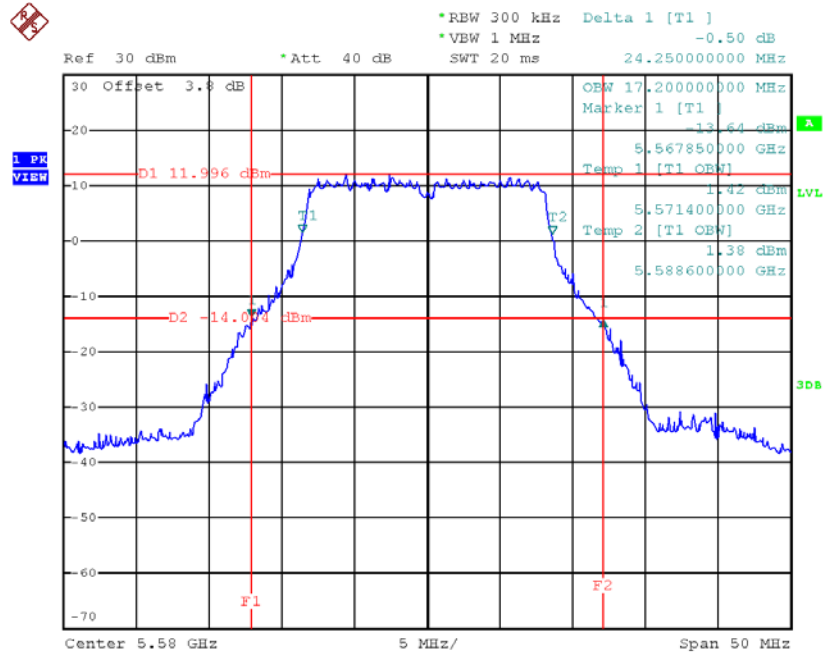

Date: 16.MAR.2018 15:42:14

TX CH140

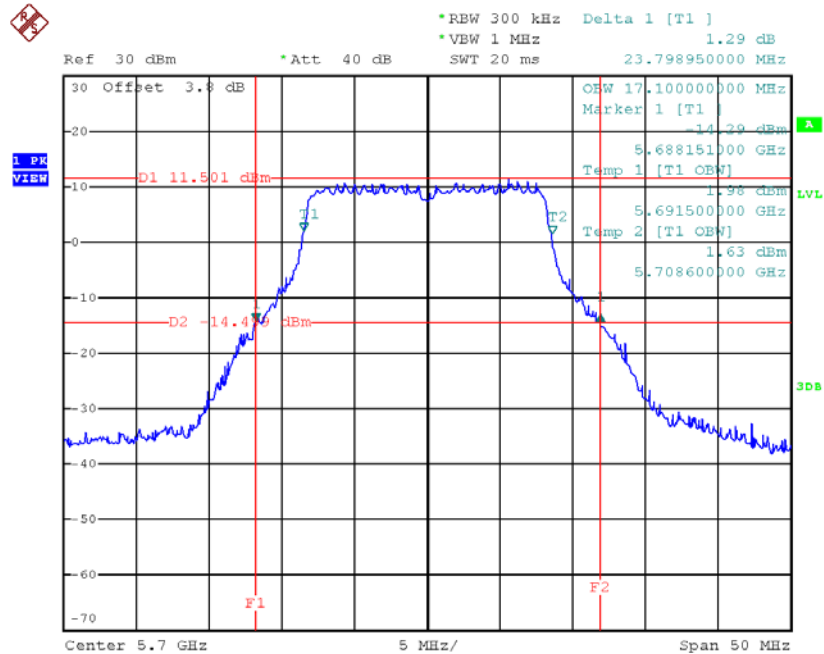


Date: 16.MAR.2018 15:43:48

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	24.89	18.20
CH116	5580	25.39	18.20
CH140	5700	25.05	18.20


Note: The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26 dB emission bandwidth in megahertz.

TX CH100

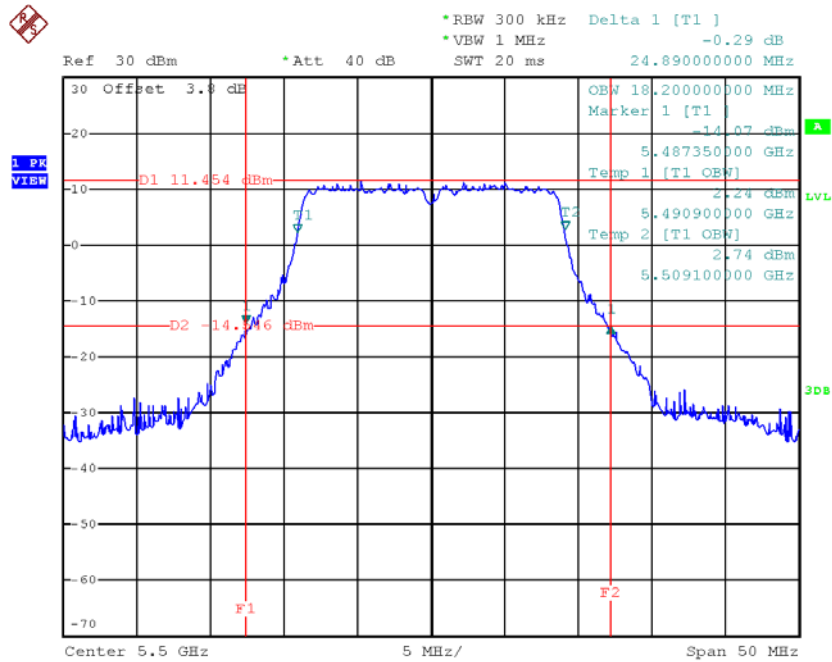


Date: 16.MAR.2018 16:01:05

TX CH116

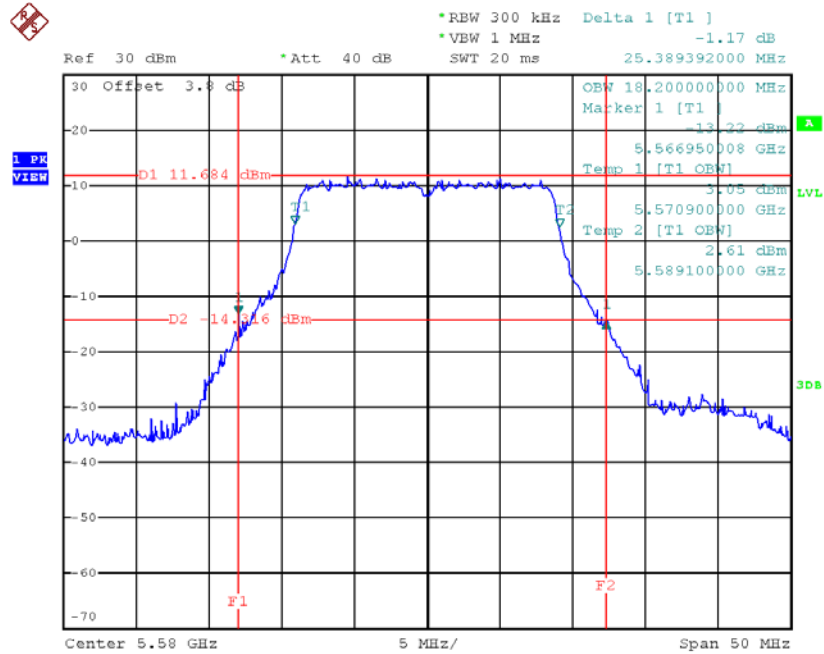

Date: 16.MAR.2018 16:02:41

TX CH140

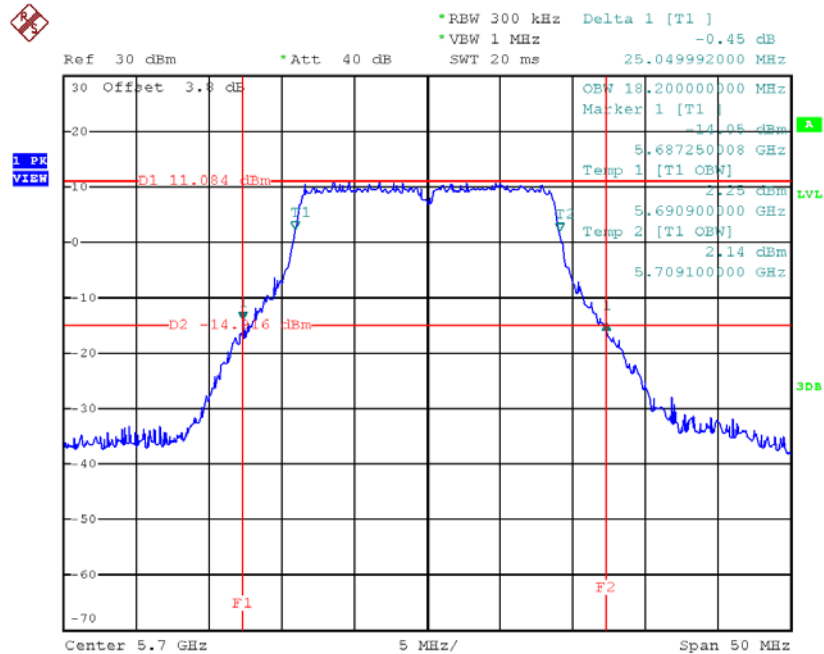


Date: 16.MAR.2018 16:03:48

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	46.10	37.20
CH110	5550	45.10	37.20
CH134	5670	45.40	37.20


Note: The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26 dB emission bandwidth in megahertz.

TX CH102

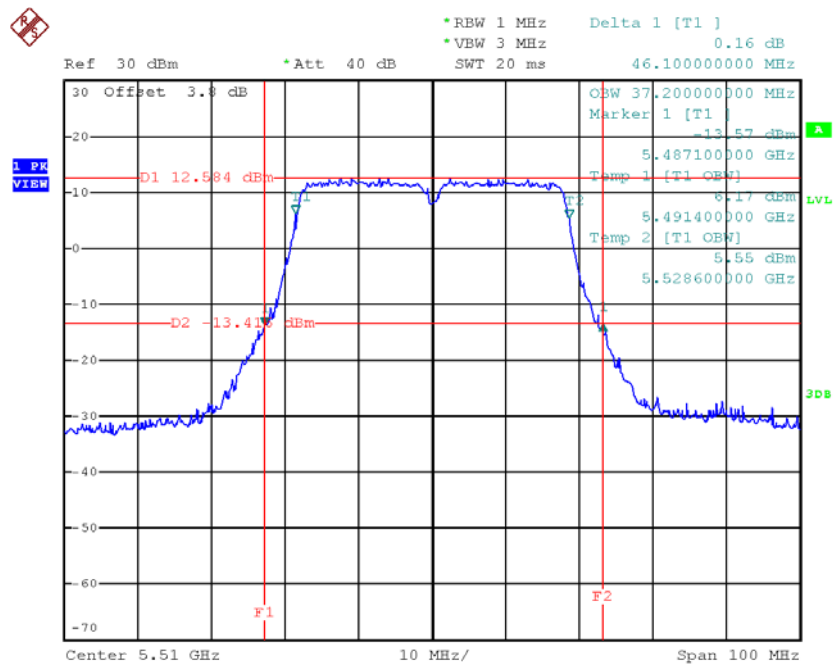


Date: 16.MAR.2018 16:36:23

TX CH110

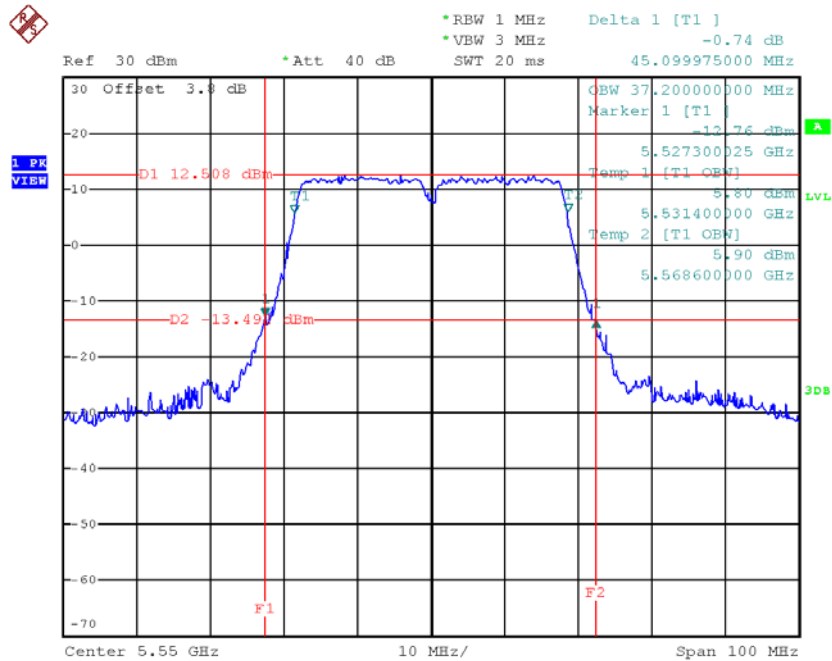

Date: 16.MAR.2018 16:37:43

TX CH134

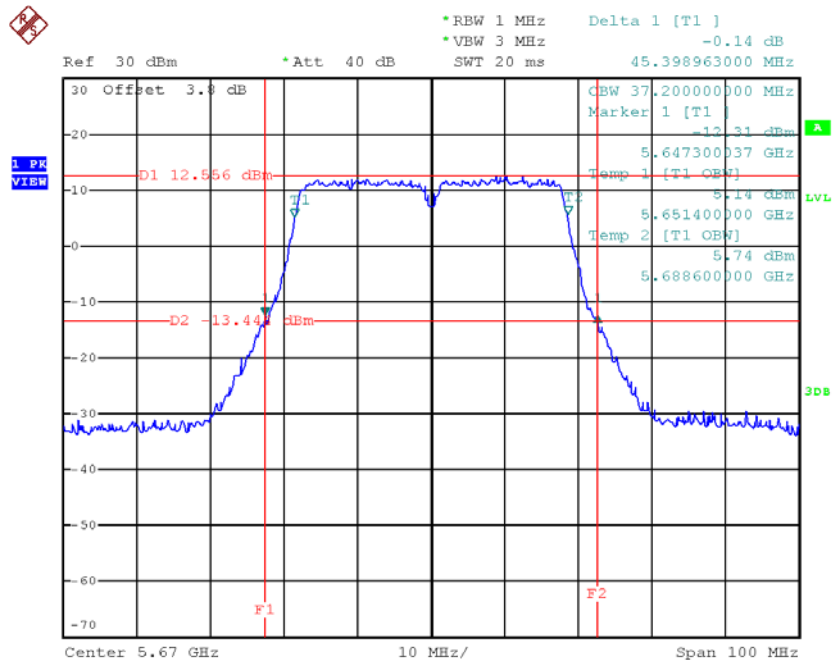


Date: 16.MAR.2018 16:39:03

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.45	16.60	>=500
CH157	5785	16.50	16.60	>=500
CH165	5825	16.45	16.60	>=500

TX CH 149

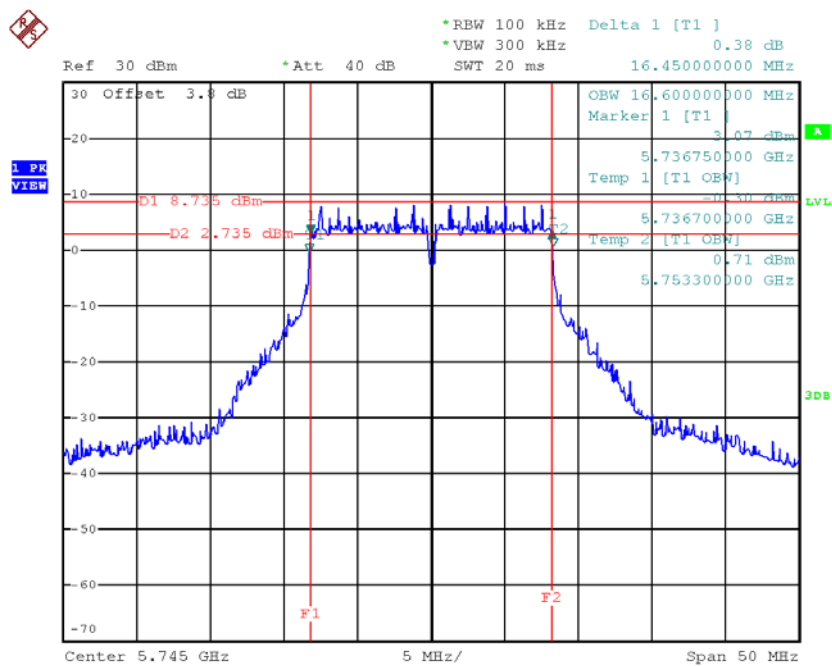


Date: 16.MAR.2018 15:45:08

TX CH 157

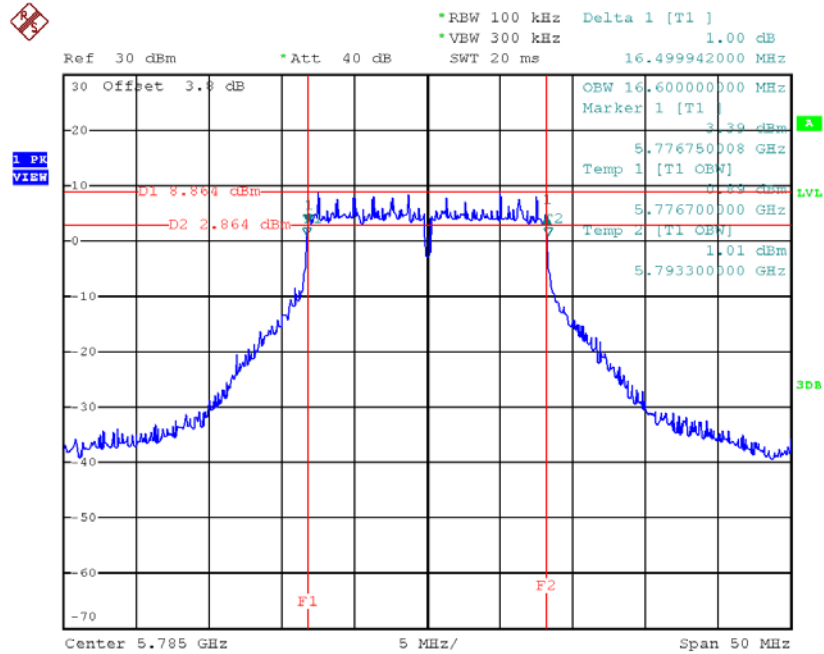

Date: 16.MAR.2018 15:46:51

TX CH 165

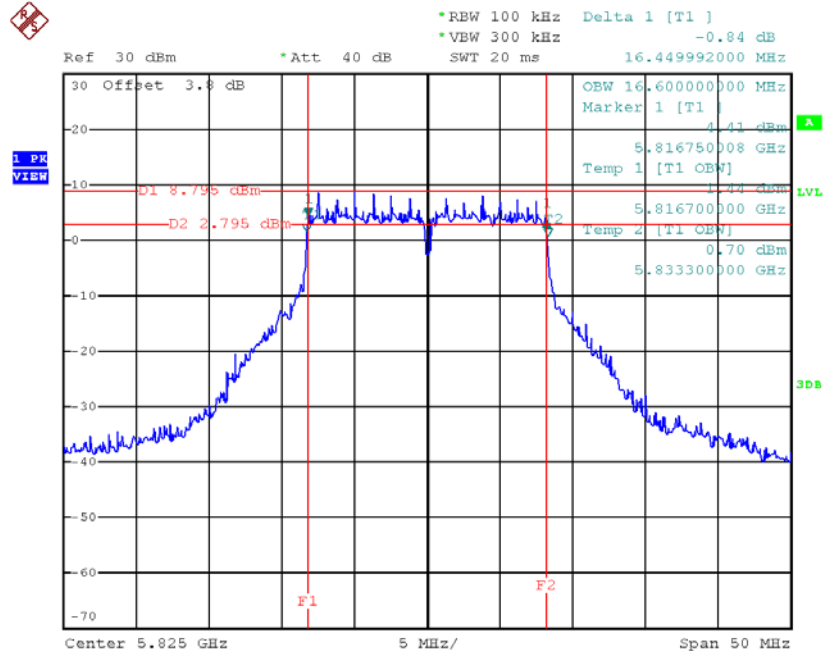


Date: 16.MAR.2018 15:48:02

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.70	17.80	>=500
CH157	5785	17.61	17.80	>=500
CH165	5825	17.65	17.80	>=500

TX CH 149

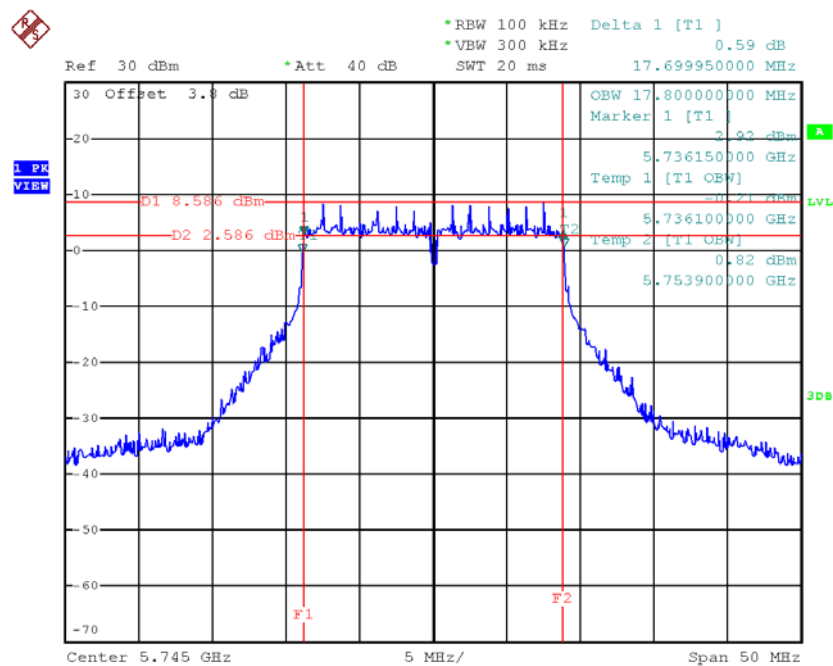


Date: 16.MAR.2018 16:05:29

TX CH 157

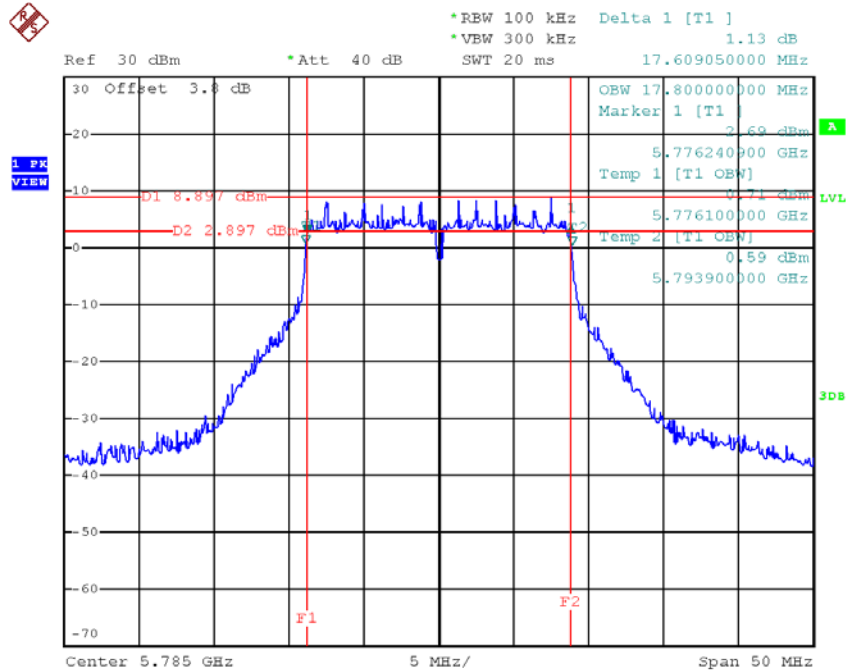

Date: 16.MAR.2018 16:06:50

TX CH 165

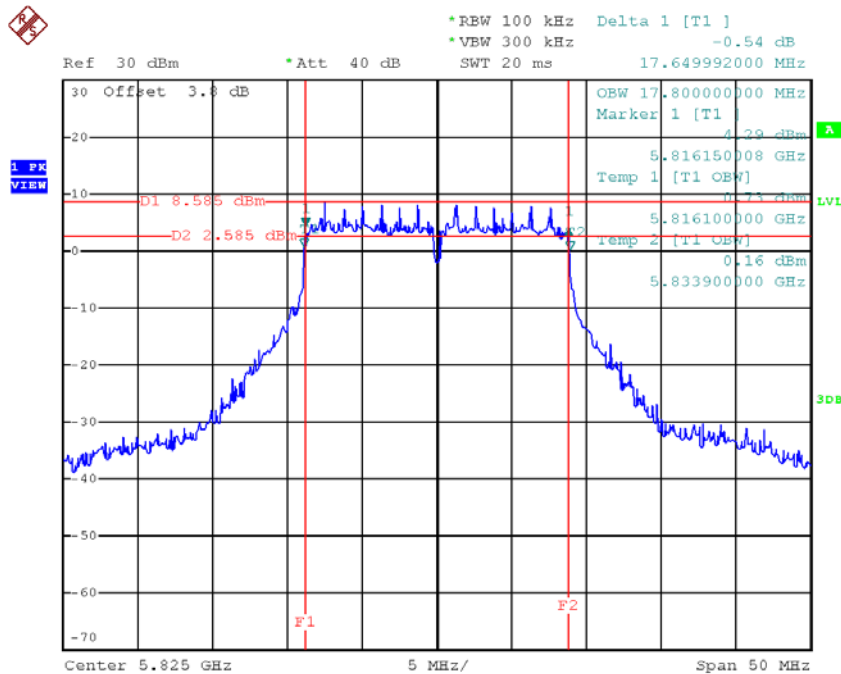


Date: 16.MAR.2018 16:07:57

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.40	>=500
CH159	5795	36.50	36.40	>=500

TX CH 151

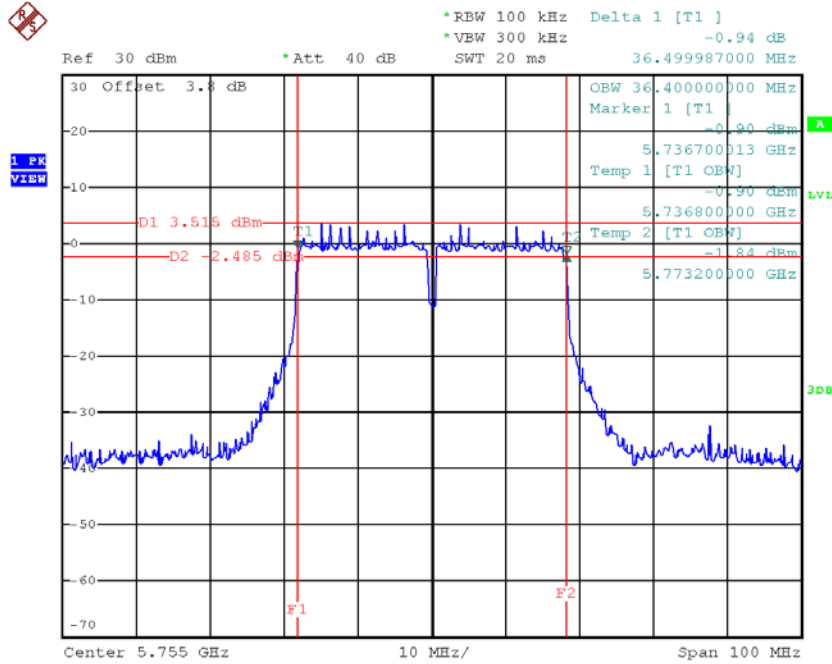

Date: 16.MAR.2018 16:40:36

TX CH 159

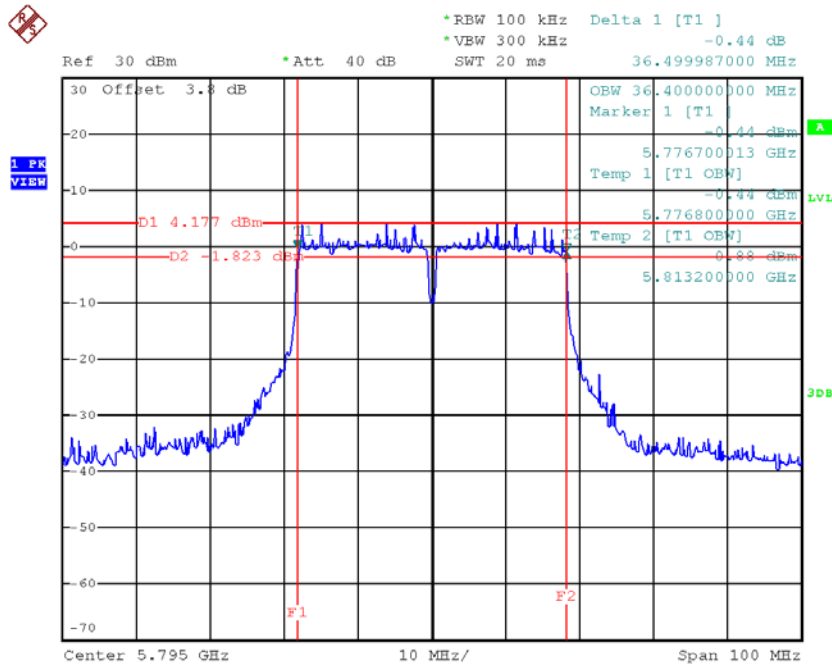


Date: 16.MAR.2018 16:42:00

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	24.45	18.10
CH40	5200	24.35	18.10
CH48	5240	24.29	18.10

TX CH36

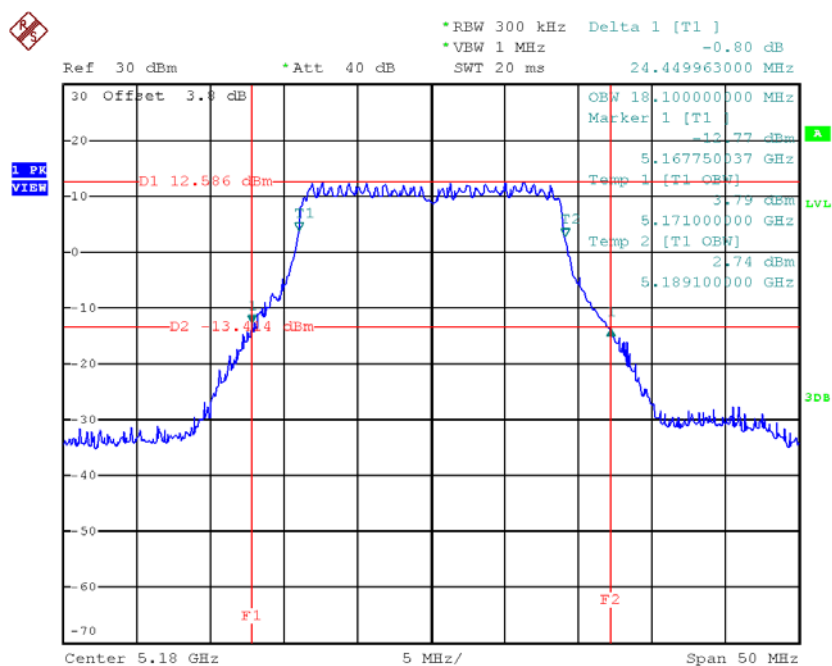


Date: 16.MAR.2018 16:10:31

TX CH40

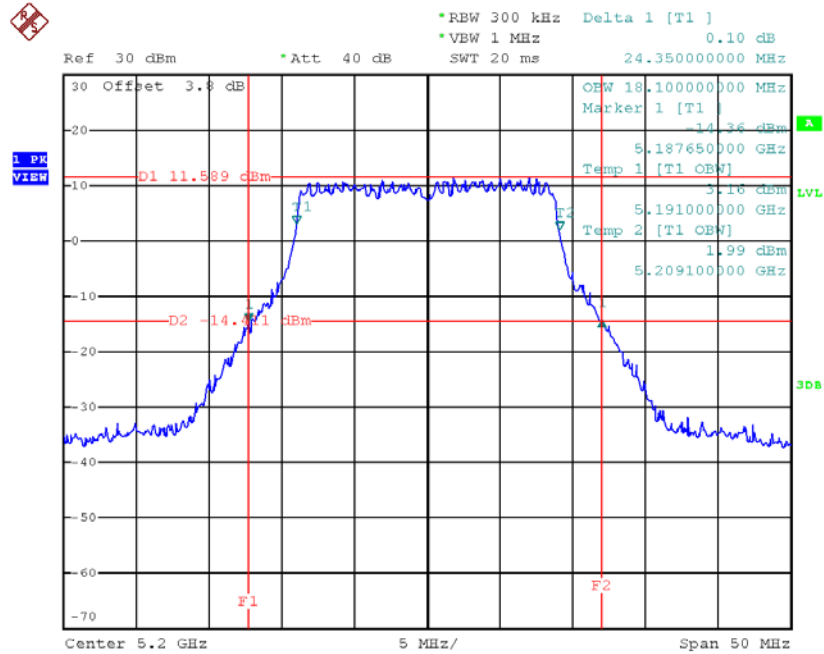

Date: 16.MAR.2018 16:14:42

TX CH48

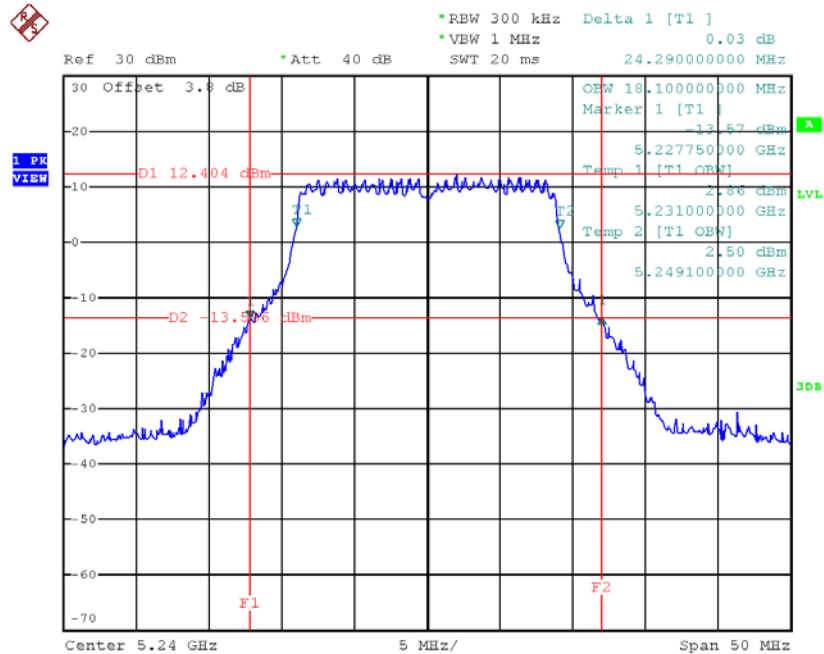


Date: 16.MAR.2018 16:15:47

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	45.50	36.80
CH46	5230	43.59	37.00

TX CH38

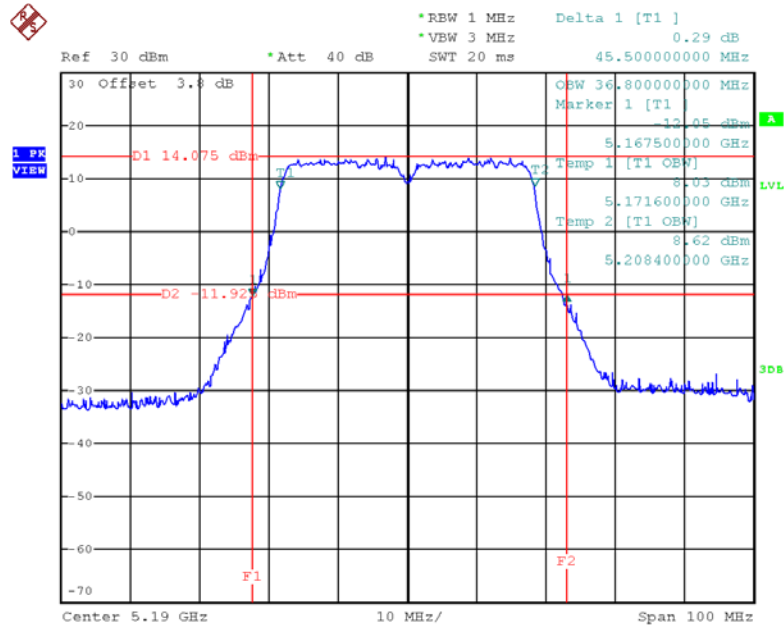

Date: 16.MAR.2018 16:43:25

TX CH46

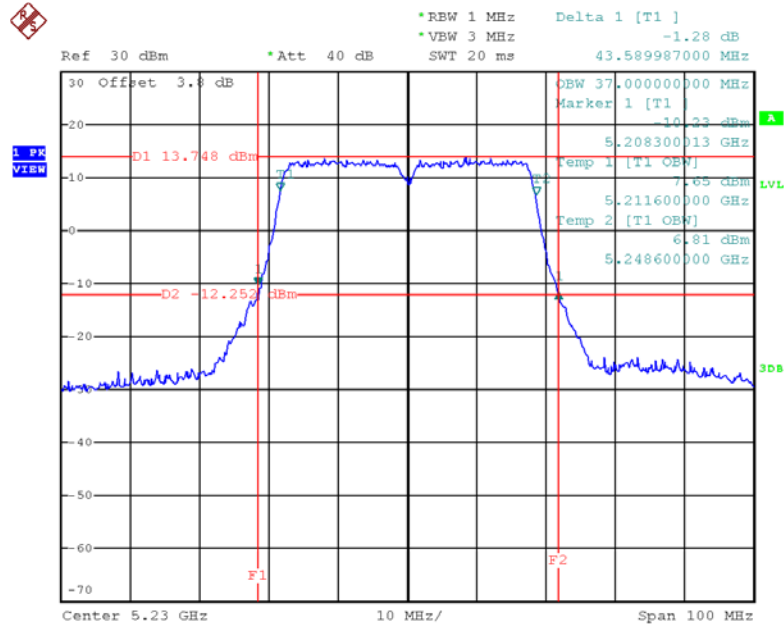


Date: 16.MAR.2018 16:45:57

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	84.39	75.20

TX CH42

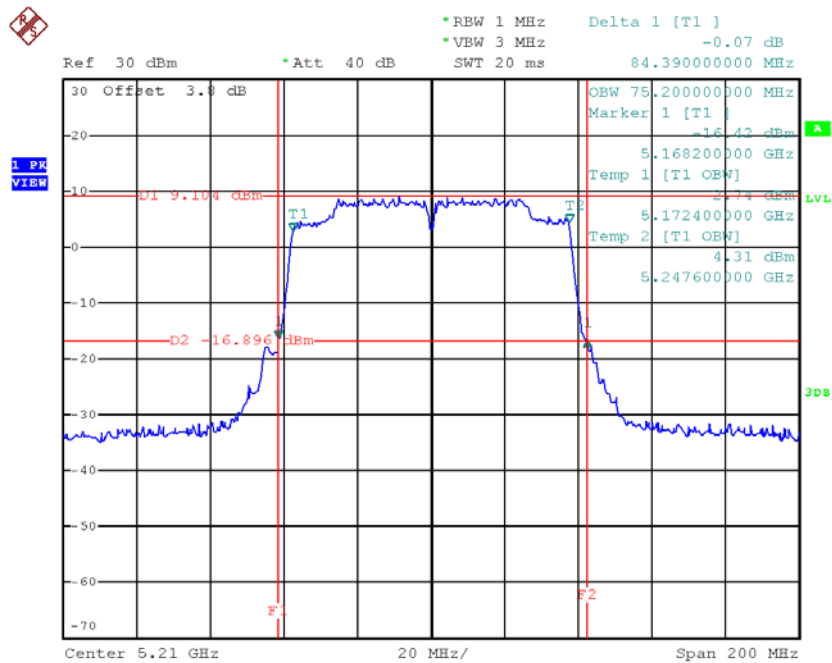


Date: 16.MAR.2018 16:57:57

Test Mode: UNII-1/TX AC160 Mode_CH50

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH50	5250	164.32	153.60

TX CH50

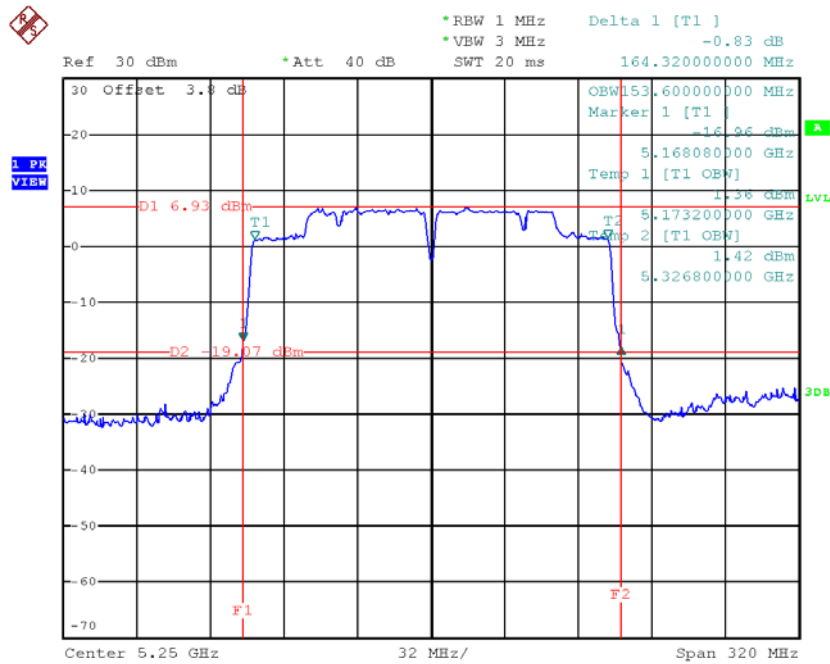

Date: 21.MAR.2018 16:35:25