



RF TEST REPORT

Report No.: SET2019-10393

Product: 4G Wireless Router

FCC ID: SRQ-MF286C

Model No.: MF286C

Applicant: ZTE Corporation

Address: ZTE Plaza, Keji Road South, Shenzhen, China

Dates of Testing: 08/01/2019 — 08/23/2019

Issued by: CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

Lab Location: Building 28/29, East of Shigu Xili Industrial Zone, Nanshan District Shenzhen, Guangdong 518055, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 179 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product : 4G Wireless Router
Brand Name..... : ZTE
Trade Name : ZTE
Applicant : ZTE Corporation
Applicant Address : ZTE Plaza, Keji Road South, Shenzhen, China.
Manufacturer : ZTE Corporation
Manufacturer Address : ZTE Plaza, Keji Road South, Shenzhen, China.
Test Standards : 47 CFR Part 2/22/24/27
Test Result..... : PASS

Tested by : Robin Luo 2019.08.19.
Robin Luo, Test Engineer

Reviewed by..... : Chris You 2019.08.19.
Chris You, Senior Engineer

Approved by..... : Shuangwen Zhang 2019.08.19.
Shuangwen Zhang, Manager



Table of Contents

1.	GENERAL INFORMATION	5
1.1	EUT Description.....	5
1.2	Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator.....	6
1.3	Test Standards and Results.....	9
1.4	Test Configuration of Equipment Under Test	11
1.5	Measurement Results Explanation Example.....	12
1.6	Facilities and Accreditations	13
2.	47 CFR PART 2 REQUIREMENTS.....	14
2.1	Conducted RF Output Power.....	14
2.2	Peak to Average Ratio	16
2.3	99% Occupied Bandwidth and 26dB Bandwidth	18
2.4	Frequency Stability	20
2.5	Conducted Out of Band Emissions.....	23
2.6	Conducted Band Edge	26
2.7	Transmitter Radiated Power (EIRP/ERP).....	28
2.8	Radiated Out of Band Emissions	36
3.	LIST OF MEASURING EQUIPMENT	44
	APPENDIX A	45
	Conducted RF (Average) Output Power	45
	99% Occupied Bandwidth.....	87
	26dB Bandwidth.....	100
	Frequency Stability	113
	Conducted Out of Band Emissions.....	116
	Conducted Band Edge	129



Change History		
Issue	Date	Reason for change
1.0	2019.08.19	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Type	4G Wireless Router
EUT supports Radios application	LTE Band 2/4/5/7/12/66
Frequency Range	LTE Band 2: 1850.7MHz~1909.3MHz LTE Band 4: 1710.7MHz~1754.3MHz LTE Band 5: 824.7MHz~848.3MHz LTE Band 7: 2502.5MHz~2567.5MHz LTE Band 12: 699.7MHz~715.3MHz LTE Band 66: 1710.7MHz~1754.3MHz
Maximum Output Power to Antenna	LTE Band 2: 22.20dBm LTE Band 4: 22.05dBm LTE Band 5: 22.23dBm LTE Band 7: 21.14dBm LTE Band 12: 22.83dBm LTE Band 66: 21.93dBm
Bandwidth	LTE Band 2: 1.4MHz/3MHz/5MHz/10MHz/15MHz/20MHz LTE Band 4: 1.4MHz/3MHz/5MHz/10MHz/15MHz/20MHz LTE Band 5: 1.4MHz/3MHz/5MHz/10MHz LTE Band 7: 5MHz/10MHz/15MHz/20MHz LTE Band 12: 1.4MHz/3MHz/5MHz/10MHz LTE Band 66: 1.4MHz/3MHz/5MHz/10MHz/15MHz/20MHz
Modulation Type	QPSK/16QAM/64QAM(downlink only)
Antenna Type	Internal Antenna
Antenna Gain	LTE Band 2:1.7dBi LTE Band 4:1.7dBi LTE Band 5: 0.5dBi LTE Band 7: 2dBi LTE Band 12: 0.5dBi LTE Band 66: 1.7dBi
Power supply	DC 3.85V from battery DC 5V from adapter



1.2 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

Band	Type of Modulation	BW (MHz)	Emission Designator	Frequency Tolerance (ppm)	Maximum ERP/EIRP(W)
LTE Band 2	QPSK	1.4	1M09G7D	—	0.174
LTE Band 2	16QAM	1.4	1M09W7D	—	0.172
LTE Band 2	QPSK	3	2M68G7D	—	0.160
LTE Band 2	16QAM	3	2M68W7D	—	0.158
LTE Band 2	QPSK	5	4M49G7D	—	0.116
LTE Band 2	16QAM	5	4M49W7D	—	0.117
LTE Band 2	QPSK	10	8M92G7D	0.008	0.120
LTE Band 2	16QAM	10	8M92W7D	—	0.126
LTE Band 2	QPSK	15	13M4G7D	—	0.102
LTE Band 2	16QAM	15	13M4W7D	—	0.102
LTE Band 2	QPSK	20	17M9G7D	—	0.130
LTE Band 2	16QAM	20	17M9W7D	—	0.131
LTE Band 4	QPSK	1.4	1M09G7D	—	0.129
LTE Band 4	16QAM	1.4	1M08W7D	—	0.104
LTE Band 4	QPSK	3	2M68G7D	—	0.130
LTE Band 4	16QAM	3	2M68W7D	—	0.148
LTE Band 4	QPSK	5	4M49G7D	—	0.174
LTE Band 4	16QAM	5	4M49W7D	—	0.150
LTE Band 4	QPSK	10	8M92G7D	0.005	0.138
LTE Band 4	16QAM	10	8M92W7D	—	0.119
LTE Band 4	QPSK	15	13M4G7D	—	0.108
LTE Band 4	16QAM	15	13M4W7D	—	0.089
LTE Band 4	QPSK	20	17M9G7D	—	0.110
LTE Band 4	16QAM	20	17M9W7D	—	0.092



LTE Band 5	QPSK	1.4	1M08G7D	—	0.092
LTE Band 5	16QAM	1.4	1M08W7D	—	0.095
LTE Band 5	QPSK	3	2M68G7D	—	0.095
LTE Band 5	16QAM	3	2M68W7D	—	0.093
LTE Band 5	QPSK	5	4M49G7D	—	0.117
LTE Band 5	16QAM	5	4M49W7D	—	0.123
LTE Band 5	QPSK	10	8M92G7D	0.010	0.119
LTE Band 5	16QAM	10	8M92W7D	—	0.126
LTE Band 7	QPSK	5	4M48G7D	—	0.130
LTE Band 7	16QAM	5	4M49W7D	—	0.132
LTE Band 7	QPSK	10	8M93G7D	0.005	0.129
LTE Band 7	16QAM	10	8M92W7D	—	0.139
LTE Band 7	QPSK	15	13M4G7D	—	0.132
LTE Band 7	16QAM	15	13M4W7D	—	0.110
LTE Band 7	QPSK	20	17M9G7D	—	0.108
LTE Band 7	16QAM	20	17M9W7D	—	0.107
LTE Band 12	QPSK	1.4	1M09G7D	—	0.095
LTE Band 12	16QAM	1.4	1M09W7D	—	0.099
LTE Band 12	QPSK	3	2M68G7D	—	0.108
LTE Band 12	16QAM	3	2M68W7D	—	0.080
LTE Band 12	QPSK	5	4M49G7D	—	0.099
LTE Band 12	16QAM	5	4M49W7D	—	0.081
LTE Band 12	QPSK	10	8M93G7D	0.014	0.109
LTE Band 12	16QAM	10	8M92W7D	—	0.090
LTE Band 66	QPSK	1.4	1M09G7D	—	0.13
LTE Band 66	16QAM	1.4	1M09W7D	—	0.11
LTE Band 66	QPSK	3	2M69G7D	—	0.13
LTE Band 66	16QAM	3	2M68W7D	—	0.15
LTE Band 66	QPSK	5	4M49G7D	—	0.18



LTE Band 66	16QAM	5	4M49W7D	—	0.12
LTE Band 66	QPSK	10	8M93G7D	0.005	0.14
LTE Band 66	16QAM	10	8M92W7D	—	0.12
LTE Band 66	QPSK	15	13M5G7D	—	0.11
LTE Band 66	16QAM	15	13M5W7D	—	0.09
LTE Band 66	QPSK	20	17M9G7D	—	0.11
LTE Band 66	16QAM	20	17M9W7D	—	0.09



1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part24, Part27 , Part90, for the EUT FCC ID Certification:

1.47 CFR Part 2, 24(E), 27(F), 27(L), 27(H), 27(M)

2. ANSI/TIA/EIA-603-D-2010

3. FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Limit	Result
1	2.1046	Conducted RF Output Power	Reporting Only	PASS
2	§24.232(d)	Peak to Average Ratio	< 13dB	PASS
3	§22.913(a)(2)	Effective Radiated Power (Band 5)	ERP < 7 Watt	PASS
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2/7)	EIRP < 2Watt	PASS
	§27.50(b)(10) §27.50(c)(10)	Effective Radiated Power (Band 12)	ERP < 3 Watt	PASS
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4) (Band 66)	EIRP < 1Watt	PASS
4	2.1049	Occupied Bandwidth	Reporting Only	PASS
5	§2.1051 §22.917(a) §24.238(a) §27.53(c)(2) §27.53(g) §27.53(h) §90.691	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5) (Band 12) (Band 66) (Band 7)	< 43+10log10(P[watt]) <5.5MHz: -13dBm ≥5.5MHz: -25dBm (Band7)	PASS



	2.1051 27.53(m)(4)			
6	2.1051 §22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h)	Conducted Spurious Emission Measurement (Band 2) (Band 4) (Band 5) (Band 12) (Band 66)	< 43+10log10(P[watt])	PASS
	2.1051 27.53(m)(4) 27.53(i)(4)	Conducted Spurious Emission Measurement (Band 7)	< 55+10log10(P[watt])	PASS
7	2.1053 §22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h) §90.691	Radiated Spurious Emission (Band 2) (Band 4) (Band 5) (Band 12) (Band 66)	< 43+10log10(P[watt])	PASS
	2.1053 27.53(m)(4) §90.691 27.53(i)(4)	Radiated Spurious Emission (Band 7)	< 55+10log10(P[watt])	PASS
8	2.1055 22.335 24.235 27.54 90.691	Frequency Stability	<2.5ppm	PASS

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.4 Test Configuration of Equipment Under Test

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth(MHz)						Modulation		RB#			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	5	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	7			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	12	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	66	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Peak-to-Average Ratio	2	✓	✓	✓	✓	✓	✓		✓	✓		✓	✓	✓	✓
	4	✓	✓	✓	✓	✓	✓		✓	✓		✓	✓	✓	✓
	5	✓	✓	✓	✓				✓	✓		✓	✓	✓	✓
	7			✓	✓	✓	✓		✓	✓		✓	✓	✓	✓
	12	✓	✓	✓	✓				✓	✓		✓	✓	✓	✓
	66	✓	✓	✓	✓	✓	✓		✓	✓		✓	✓	✓	✓
26dB and 99% Bandwidth	2	✓	✓	✓	✓	✓	✓	✓	✓			✓		✓	
	4	✓	✓	✓	✓	✓	✓	✓	✓			✓		✓	
	5	✓	✓	✓	✓			✓	✓			✓		✓	
	7			✓	✓	✓	✓	✓	✓			✓		✓	
	12	✓	✓	✓	✓			✓	✓			✓		✓	
	66	✓	✓	✓	✓	✓	✓	✓	✓			✓		✓	
Conducted Band Edge	2	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
	5	✓	✓	✓	✓			✓	✓	✓		✓	✓		✓
	7			✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
	12	✓	✓	✓	✓			✓	✓	✓		✓	✓		✓
	66	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
Conducted Spurious Emission	2	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	5	✓	✓	✓	✓			✓	✓	✓			✓	✓	✓
	7			✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	12	✓	✓	✓	✓			✓	✓	✓			✓	✓	✓
	66	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓



Frequency Stability	2				√			√				√		√	
	4				√			√				√		√	
	5				√			√				√		√	
	7				√			√				√		√	
	12				√			√				√		√	
	66				√			√				√		√	
ERP/EIRP	2	√	√	√	√	√	√	√	√	√			√	√	√
	4	√	√	√	√	√	√	√	√	√			√	√	√
	5	√	√	√	√			√	√	√			√	√	√
	7			√	√	√	√	√	√	√			√	√	√
	12	√	√	√	√			√	√	√			√	√	√
	66	√	√	√	√	√	√	√	√	√			√	√	√
Radiated Spurious Emission	2	Worst case											√		
	4	Worst case											√		
	5	Worst case											√		
	7	Worst case											√		
	12	Worst case											√		
	66	Worst case											√		
Note	<p>1. The mark “√” means that this configuration is chosen for testing.</p> <p>2. The mark “-” means that this bandwidth is not supported.</p> <p>3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</p> <p>4. For E.R.P/E.I.R.P. measurement, the widest bandwidth and the bandwidth with the highest conducted power of each band is chosen for testing. Besides, the lowest bandwidth of each band is also measured for reporting only.</p>														

1.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7dB and 10dB attenuator.

Example:

$$\begin{aligned} \text{Offset (dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 7 + 10 = 17 \text{ (dB)} \end{aligned}$$



1.6 Facilities and Accreditations

1.6.1 Test Facilities

CNAS-Lab Code: L1659

CCIC-SET is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

FCC-Registration No.: CN5031

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN5031, valid time is until December 31, 2019.

ISED Registration: 11185A-1

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Aug. 03, 2019.

NVLAP Lab Code: 201008-0

CCIC-SET is a third party testing organization accredited by NVLAP according to ISO/IEC 17025. The accreditation certificate number is 201008-0.

1.6.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	30% -60%
Atmospheric Pressure (kPa):	86KPa-106KPa

2. 47 CFR PART 2 REQUIREMENTS

2.1 Conducted RF Output Power

2.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.1.3 Test Setup



2.1.4 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



2.1.5 Test Results

Please refer to Appendix A for detail

2.2 Peak to Average Ratio


2.2.1 Definition

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

2.2.3 Test Description

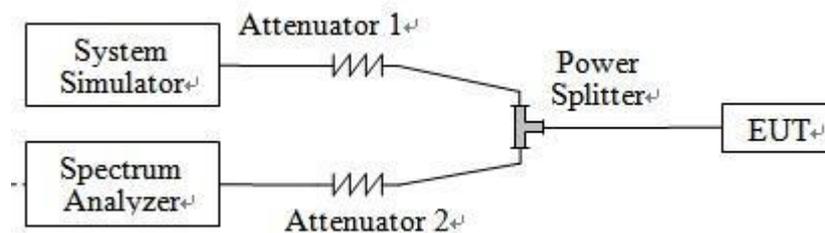

2.2.4 Test Procedures

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



2.2.5 Test Results of Peak-to-Average Ratio

Please refer to Appendix A for detail

2.3 99% Occupied Bandwidth and 26dB Bandwidth

2.3.1 Definition


According to FCC section 2.1049, the occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

2.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

2.3.3 Test Setup

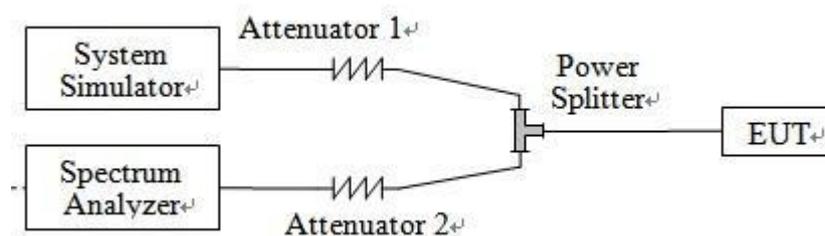

2.3.4 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.



2.3.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A for detail

2.4 Frequency Stability

2.4.1 Requirement


According to FCC requirement, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.4.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.4.3 Test Setup

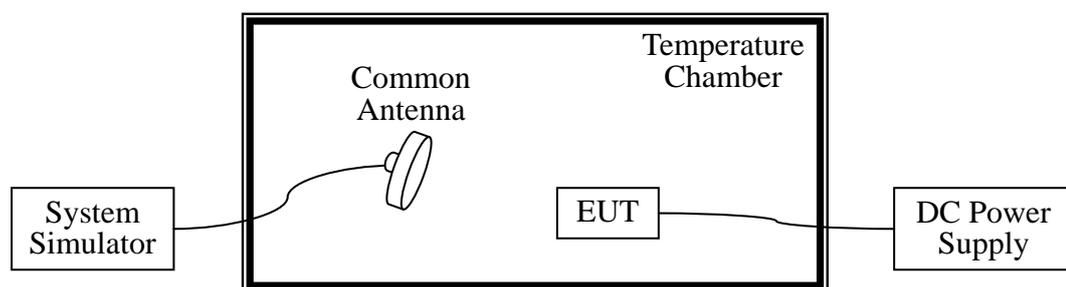

2.4.4 Test Procedures

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized



before testing. Power was applied and the maximum change in frequency was recorded within one minute.

3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. The nominal, highest and lowest extreme voltages were tested, which are specified by the applicant; the normal temperature here used is 25°C.
5. The variation in frequency was measured for the worst case.



2.4.5 Test Result of Frequency Stability

Please refer to Appendix A for detail

2.5 Conducted Out of Band Emissions

2.5.1 Requirement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7:


The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

2.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

2.5.3 Test Setup

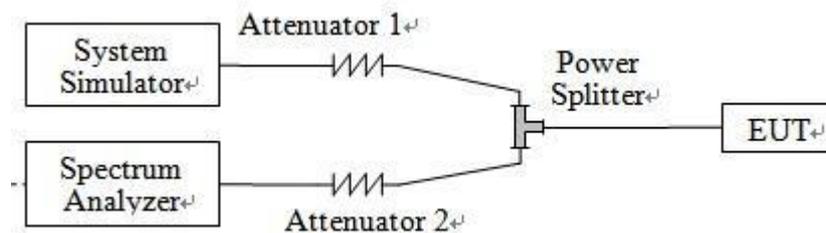

2.5.4 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.



5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
8. For Band 7
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.
9. For 9KHz to 30MHz: the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



2.5.5 Test Result of Conducted Spurious Emission

Please refer to Appendix A for detail



2.6 Conducted Band Edge

2.6.1 Description of Conducted Band Edge Measurement

22.917(a)

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

24.238(a)

For operations in the 1850 -1910 MHz band, the FCC limit is $43 + 10 \log_{10}(P [\text{Watts}])$ dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10 \log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(g)

For operations in the 698 – 746 MHz band, the FCC limit is $43 + 10 \log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 100 kHz bandwidth. However, in the 100kHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least 30kHz may be employed.


27.53m(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

2.6.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.6.3 Test Setup

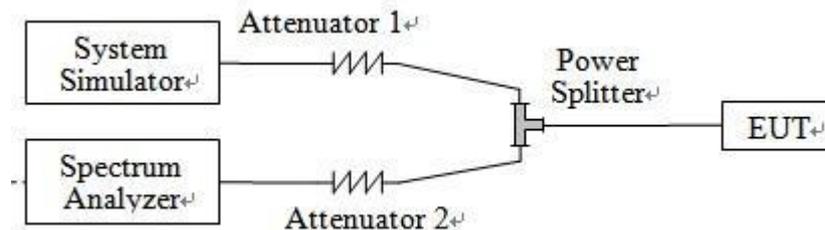

2.6.4 Test Procedures

1. The testing follows FCC KDB 971168 v03r01 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.
The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
9. For LTE Band 7 the other 40 dB, and 55 dB have additionally applied same calculation above.

2.6.5 Test Result of Conducted Band Edge

Please refer to Appendix A for detail

2.7 Transmitter Radiated Power (EIRP/ERP)

2.7.1 Requirement


Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03r01. Mobile and portable (hand-held) stations operating are limited to average ERP of 7 watts with LTE band 5/26 and 3 watts with LTE band 12 / 13.

Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03r01. Mobile and portable (hand-held) stations operating are limited to average EIRP of 2 watts with LTE band 2 / 25 / 41/7 and 1 watt with LTE band 4 and 66.

2.7.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.7.3 Test Setup

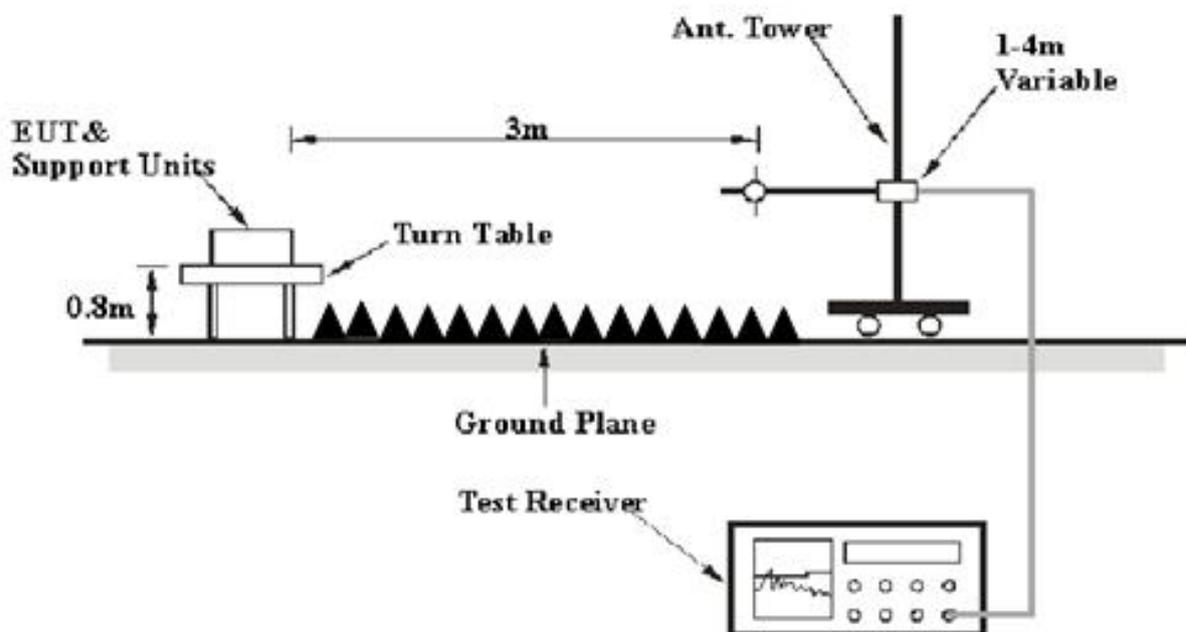

2.7.4 Test Procedures

1. The EUT was placed on a turntable with 1.5 meter height in a fully anechoic chamber.
2. The EUT was set at 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer which used a channel power option across EUT's signal bandwidth per section 4.0 of KDB 971168 D01v03r01.
4. The table was rotated 360 degrees to determine the position of the highest radiated power.
5. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
6. Taking the record of maximum ERP/EIRP.
7. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
8. The conducted power at the terminal of the dipole antenna is measured.
9. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
10. $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

P_s (dBm): Input power to substitution antenna.

G_s (dBi or dBd): Substitution antenna Gain.

$E_t = R_t + AF$

$E_s = R_s + AF$

AF (dB/m): Receive antenna factor

R_t : The highest received signal in spectrum analyzer for EUT.

R_s : The highest received signal in spectrum analyzer for substitution antenna.

**2.7.5 Test Result of ERP/EIRP**

1. LTE Band 2 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	Verdict
			RB Size	RB Offset			
2	1.4	QPSK	1	3	1850.7	22.04	PASS
2	1.4	QPSK	1	3	1880	22.41	PASS
2	1.4	QPSK	1	3	1909.3	22.09	PASS
2	1.4	16QAM	1	0	1850.7	21.18	PASS
2	1.4	16QAM	1	0	1880	21.68	PASS
2	1.4	16QAM	1	0	1909.3	22.35	PASS
2	3	QPSK	1	8	1851.5	21.72	PASS
2	3	QPSK	1	8	1880	21.76	PASS
2	3	QPSK	1	8	1908.5	22.04	PASS
2	3	16QAM	1	0	1851.5	22.00	PASS
2	3	16QAM	1	0	1880	21.97	PASS
2	3	16QAM	1	0	1908.5	21.98	PASS
2	5	QPSK	1	0	1852.5	20.64	PASS
2	5	QPSK	1	0	1880	20.61	PASS
2	5	QPSK	1	0	1907.5	20.63	PASS
2	5	16QAM	1	24	1852.5	20.67	PASS
2	5	16QAM	1	24	1880	20.66	PASS
2	5	16QAM	1	24	1907.5	20.64	PASS
2	10	QPSK	1	49	1855	20.76	PASS
2	10	QPSK	1	49	1880	20.78	PASS
2	10	QPSK	1	49	1905	20.75	PASS
2	10	16QAM	1	0	1855	21.01	PASS
2	10	16QAM	1	0	1880	20.99	PASS
2	10	16QAM	1	0	1905	21.02	PASS
2	15	QPSK	1	74	1857.5	20.05	PASS
2	15	QPSK	1	74	1880	20.02	PASS
2	15	QPSK	1	74	1902.5	20.07	PASS
2	15	16QAM	1	0	1857.5	20.09	PASS
2	15	16QAM	1	0	1880	20.07	PASS
2	15	16QAM	1	0	1902.5	20.10	PASS
2	20	QPSK	1	0	1860	21.12	PASS
2	20	QPSK	1	0	1880	21.14	PASS
2	20	QPSK	1	0	1900	21.13	PASS
2	20	16QAM	1	0	1860	21.17	PASS
2	20	16QAM	1	0	1880	21.14	PASS
2	20	16QAM	1	0	1900	21.04	PASS



2. LTE Band 4 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	Verdict
			RB Size	RB Offset			
4	1.4	QPSK	1	0	1710.7	21.03	PASS
4	1.4	QPSK	1	0	1732.5	21.11	PASS
4	1.4	QPSK	1	0	1754.3	21.06	PASS
4	1.4	16QAM	1	3	1710.7	20.13	PASS
4	1.4	16QAM	1	3	1732.5	20.16	PASS
4	1.4	16QAM	1	3	1754.3	20.13	PASS
4	3	QPSK	1	0	1711.5	21.14	PASS
4	3	QPSK	1	0	1732.5	21.15	PASS
4	3	QPSK	1	0	1753.5	21.13	PASS
4	3	16QAM	1	14	1711.5	21.69	PASS
4	3	16QAM	1	14	1732.5	21.67	PASS
4	3	16QAM	1	14	1753.5	21.65	PASS
4	5	QPSK	1	0	1712.5	22.38	PASS
4	5	QPSK	1	0	1732.5	22.37	PASS
4	5	QPSK	1	0	1752.5	22.40	PASS
4	5	16QAM	1	0	1712.5	21.76	PASS
4	5	16QAM	1	0	1732.5	21.72	PASS
4	5	16QAM	1	0	1752.5	21.74	PASS
4	10	QPSK	1	0	1715	21.39	PASS
4	10	QPSK	1	0	1732.5	21.37	PASS
4	10	QPSK	1	0	1750	21.36	PASS
4	10	16QAM	1	24	1715	20.73	PASS
4	10	16QAM	1	24	1732.5	20.75	PASS
4	10	16QAM	1	24	1750	20.72	PASS
4	15	QPSK	1	74	1717.5	20.29	PASS
4	15	QPSK	1	74	1732.5	20.32	PASS
4	15	QPSK	1	74	1747.5	20.31	PASS
4	15	16QAM	1	74	1717.5	19.43	PASS
4	15	16QAM	1	74	1732.5	19.38	PASS
4	15	16QAM	1	74	1747.5	19.47	PASS
4	20	QPSK	1	0	1720	20.36	PASS
4	20	QPSK	1	0	1732.5	20.39	PASS
4	20	QPSK	1	0	1745	20.41	PASS
4	20	16QAM	1	0	1720	19.58	PASS
4	20	16QAM	1	0	1732.5	19.53	PASS
4	20	16QAM	1	0	1745	19.62	PASS



3. LTE Band 5 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	ERP (dBm)	Verdict
			RB Size	RB Offset			
5	1.4	QPSK	1	3	824.7	19.65	PASS
5	1.4	QPSK	1	3	836.5	19.62	PASS
5	1.4	QPSK	1	3	848.3	19.63	PASS
5	1.4	16QAM	1	3	824.7	19.80	PASS
5	1.4	16QAM	1	3	836.5	19.77	PASS
5	1.4	16QAM	1	3	848.3	19.78	PASS
5	3	QPSK	1	0	825.5	19.50	PASS
5	3	QPSK	1	0	836.5	19.51	PASS
5	3	QPSK	1	0	847.5	19.77	PASS
5	3	16QAM	1	0	825.5	19.10	PASS
5	3	16QAM	1	0	836.5	19.69	PASS
5	3	16QAM	1	0	847.5	19.56	PASS
5	5	QPSK	1	0	826.5	20.65	PASS
5	5	QPSK	1	0	836.5	20.68	PASS
5	5	QPSK	1	0	846.5	20.67	PASS
5	5	16QAM	1	0	826.5	20.72	PASS
5	5	16QAM	1	0	836.5	20.70	PASS
5	5	16QAM	1	0	846.5	20.89	PASS
5	10	QPSK	1	49	829.0	20.72	PASS
5	10	QPSK	1	49	836.5	20.76	PASS
5	10	QPSK	1	49	844.0	20.74	PASS
5	10	16QAM	1	0	829.0	21.00	PASS
5	10	16QAM	1	0	836.5	20.97	PASS
5	10	16QAM	1	0	844.0	20.98	PASS



4. LTE Band 7 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	Verdict
			RB Size	RB Offset			
7	5	QPSK	1	12	2502.5	21.05	PASS
7	5	QPSK	1	0	2535	21.09	PASS
7	5	QPSK	1	24	2567.5	21.15	PASS
7	5	16QAM	1	24	2502.5	21.21	PASS
7	5	16QAM	1	24	2535	21.14	PASS
7	5	16QAM	1	0	2567.5	21.19	PASS
7	10	QPSK	1	24	2505	21.12	PASS
7	10	QPSK	1	49	2535	21.07	PASS
7	10	QPSK	1	24	2565	21.02	PASS
7	10	16QAM	1	24	2505	21.43	PASS
7	10	16QAM	1	49	2535	21.36	PASS
7	10	16QAM	1	24	2565	21.34	PASS
7	15	QPSK	1	37	2507.5	20.24	PASS
7	15	QPSK	1	74	2535	20.26	PASS
7	15	QPSK	1	0	2562.5	21.20	PASS
7	15	16QAM	1	37	2507.5	20.37	PASS
7	15	16QAM	1	18	2535	20.42	PASS
7	15	16QAM	1	0	2562.5	20.40	PASS
7	20	QPSK	1	0	2510	20.26	PASS
7	20	QPSK	1	0	2535	20.34	PASS
7	20	QPSK	1	0	2560	20.32	PASS
7	20	16QAM	1	0	2510	20.30	PASS
7	20	16QAM	1	0	2535	19.43	PASS
7	20	16QAM	1	0	2560	19.36	PASS



5.LTE Band 12 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	Verdict
			RB Size	RB Offset			
12	1.4	QPSK	1	0	699.7	19.78	PASS
12	1.4	QPSK	1	0	707.5	19.76	PASS
12	1.4	QPSK	1	0	715.3	19.79	PASS
12	1.4	16QAM	1	0	699.7	19.94	PASS
12	1.4	16QAM	1	0	707.5	19.93	PASS
12	1.4	16QAM	1	0	715.3	19.91	PASS
12	3	QPSK	1	0	700.5	20.34	PASS
12	3	QPSK	1	0	707.5	20.33	PASS
12	3	QPSK	1	0	714.5	20.31	PASS
12	3	16QAM	1	8	700.5	18.99	PASS
12	3	16QAM	1	8	707.5	19.01	PASS
12	3	16QAM	1	8	714.5	19.02	PASS
12	5	QPSK	1	24	701.5	19.94	PASS
12	5	QPSK	1	24	707.5	19.92	PASS
12	5	QPSK	1	24	713.5	19.90	PASS
12	5	16QAM	1	0	701.5	19.04	PASS
12	5	16QAM	1	0	707.5	19.07	PASS
12	5	16QAM	1	0	713.5	19.06	PASS
12	10	QPSK	1	49	704	20.35	PASS
12	10	QPSK	1	49	707.5	20.37	PASS
12	10	QPSK	1	49	711	20.39	PASS
12	10	16QAM	1	0	704	19.52	PASS
12	10	16QAM	1	0	707.5	19.51	PASS
12	10	16QAM	1	0	711	19.48	PASS



6. LTE Band 66 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	Verdict
			RB Size	RB Offset			
66	1.4	QPSK	1	0	1710.7	21.14	PASS
66	1.4	QPSK	1	0	1732.5	21.22	PASS
66	1.4	QPSK	1	0	1754.3	21.17	PASS
66	1.4	16QAM	1	3	1710.7	20.24	PASS
66	1.4	16QAM	1	3	1732.5	20.27	PASS
66	1.4	16QAM	1	3	1754.3	20.24	PASS
66	3	QPSK	1	0	1711.5	21.25	PASS
66	3	QPSK	1	0	1732.5	21.26	PASS
66	3	QPSK	1	0	1753.5	21.24	PASS
66	3	16QAM	1	14	1711.5	20.80	PASS
66	3	16QAM	1	14	1732.5	21.78	PASS
66	3	16QAM	1	14	1753.5	21.76	PASS
66	5	QPSK	1	0	1712.5	22.49	PASS
66	5	QPSK	1	0	1732.5	22.48	PASS
66	5	QPSK	1	0	1752.5	22.51	PASS
66	5	16QAM	1	0	1712.5	20.87	PASS
66	5	16QAM	1	0	1732.5	20.83	PASS
66	5	16QAM	1	0	1752.5	20.85	PASS
66	10	QPSK	1	0	1715	20.50	PASS
66	10	QPSK	1	0	1732.5	21.48	PASS
66	10	QPSK	1	0	1750	21.47	PASS
66	10	16QAM	1	24	1715	20.84	PASS
66	10	16QAM	1	24	1732.5	20.86	PASS
66	10	16QAM	1	24	1750	20.83	PASS
66	15	QPSK	1	74	1717.5	20.40	PASS
66	15	QPSK	1	74	1732.5	20.43	PASS
66	15	QPSK	1	74	1747.5	20.41	PASS
66	15	16QAM	1	74	1717.5	19.54	PASS
66	15	16QAM	1	74	1732.5	19.49	PASS
66	15	16QAM	1	74	1747.5	19.51	PASS
66	20	QPSK	1	0	1720	20.47	PASS
66	20	QPSK	1	0	1732.5	20.50	PASS
66	20	QPSK	1	0	1745	20.52	PASS
66	20	16QAM	1	0	1720	19.61	PASS
66	20	16QAM	1	0	1732.5	19.64	PASS
66	20	16QAM	1	0	1745	19.63	PASS

2.8 Radiated Out of Band Emissions

2.8.1 Requirement

The radiated spurious emission was measured by substitution method according to ANSI / TIA /EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

2.8.2 Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

2.8.3 Test Setup


For radiated emissions from 9kHz to 30MHz

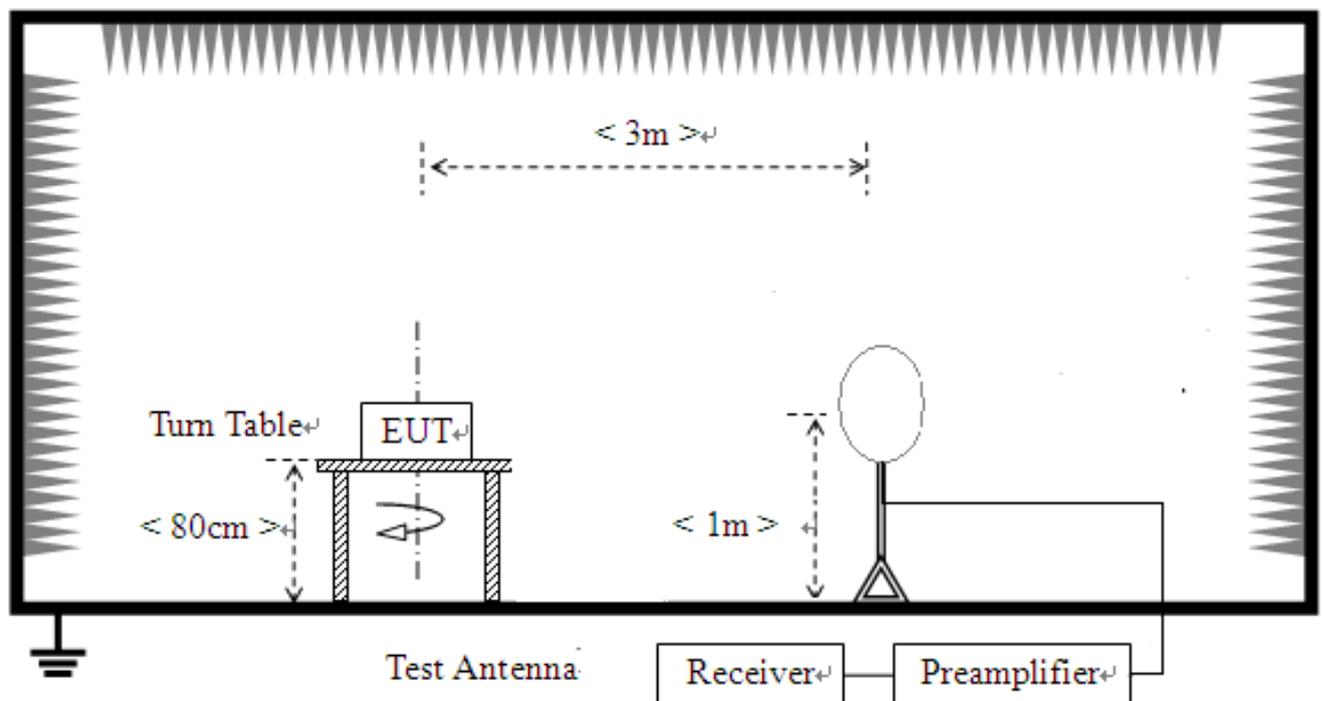

For radiated emissions from 30MHz to 1GHz

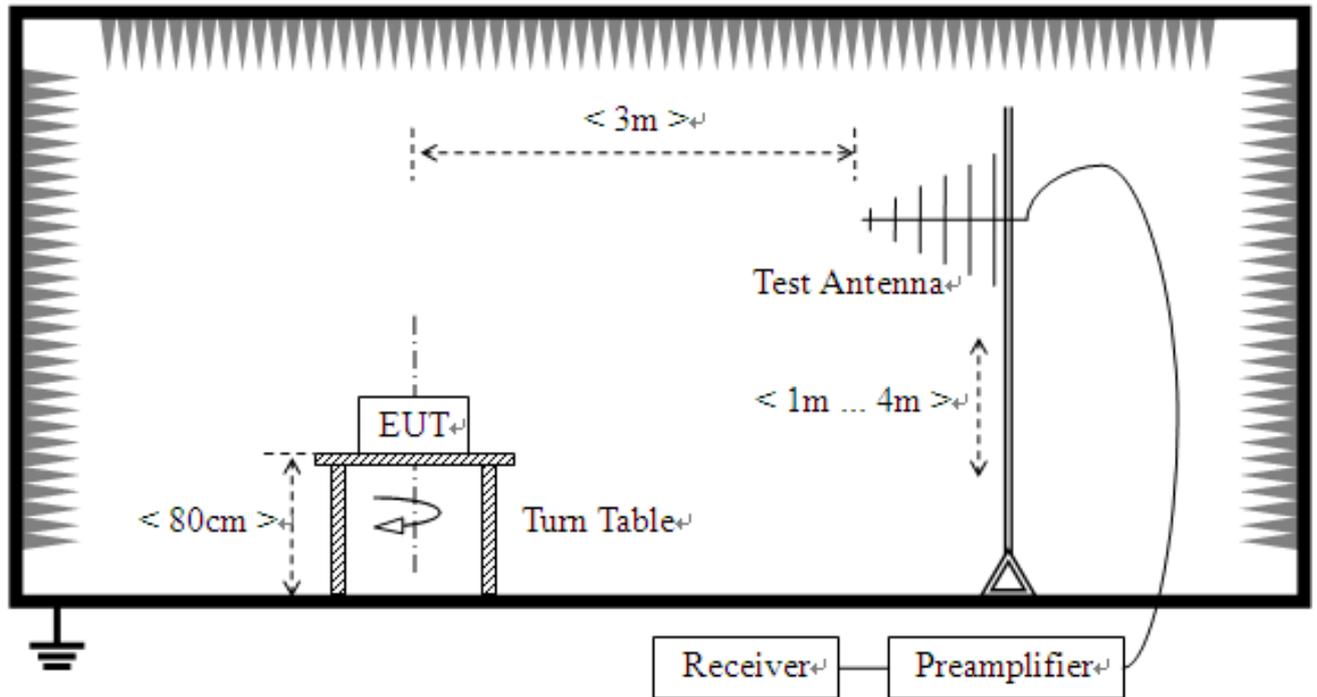

For radiated emissions above 1GHz

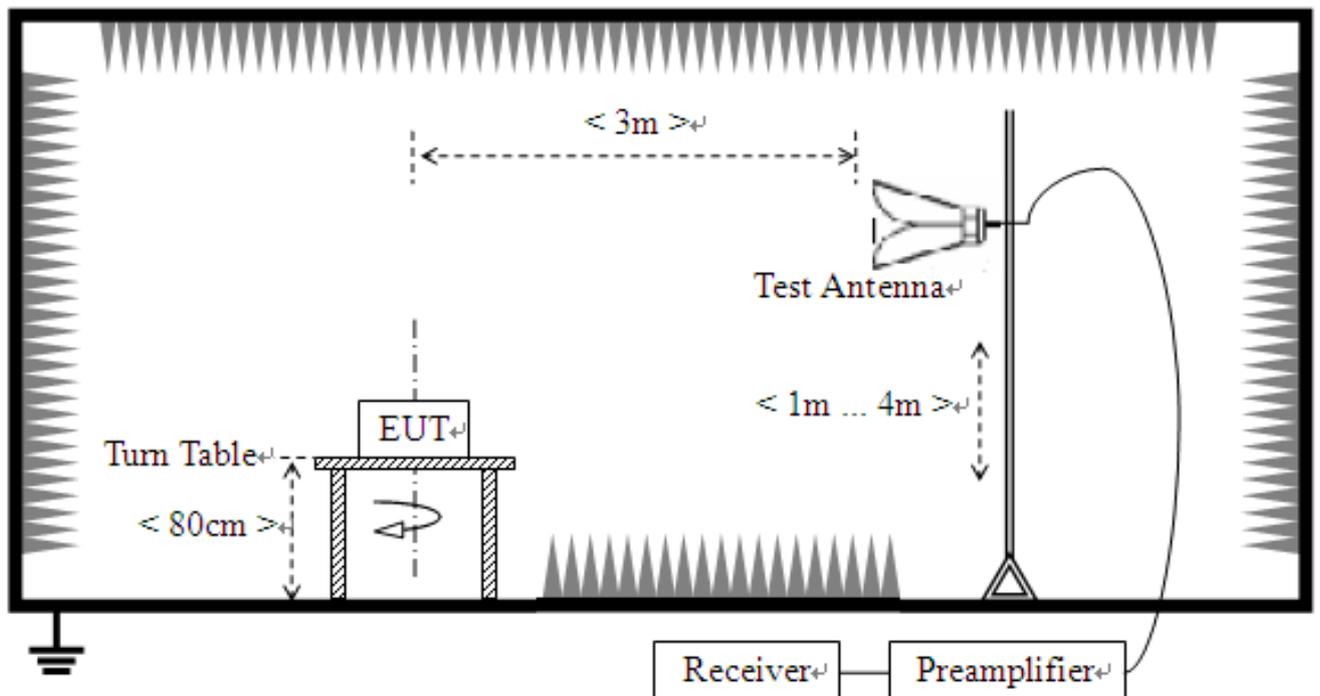

2.8.4 Test Procedures

1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

$$\begin{aligned} & \text{The limit line is derived from } 43 + 10\log(P)\text{dB below the transmitter power } P(\text{Watts}) \\ & = P(\text{W}) - [43 + 10\log(P)] \text{ (dB)} \\ & = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} \\ & = -13\text{dBm}. \end{aligned}$$

<For Band 7>

$$\begin{aligned} & \text{The limit line is derived from } 55 + 10\log(P)\text{dB below the transmitter power } P(\text{Watts}) \\ & = P(\text{W}) - [55 + 10\log(P)] \text{ (dB)} \\ & = [30 + 10\log(P)] \text{ (dBm)} - [55 + 10\log(P)] \text{ (dB)} \\ & = -25\text{dBm}. \end{aligned}$$

11. All Spurious Emission tests were performed in X, Y, Z axis direction and low, middle, high channel. And only the worst axis test condition was recorded in this test report.
12. The spectrum is measured from 9 KHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. The worst case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.



13. The maximum RB configurations of the Radiated Spurious Emissions as RB Size 1,
RB Offset 0

**2.8.5 Test Result (Plots) of Radiated Spurious Emission**

Note: 1. within 30MHz-1GHz were found more than 20dB below limit line

Note: 2. Absolute Level=Reading Level + Factor

LTE Band 2 QPSK 20MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	34.8549	-84.73	-59.33	-13.00	46.33	25.40	Horizontal
2	57.1872	-85.98	-64.22	-13.00	51.22	21.76	Horizontal
3	207.6877	-95.34	-70.37	-13.00	57.37	24.97	Horizontal
4	2921.9610	-56.34	-47.94	-13.00	34.94	8.40	Horizontal
5	3747.3737	-57.45	-48.67	-13.00	35.67	8.78	Horizontal
6	10832.416	-60.06	-37.11	-13.00	24.11	22.95	Horizontal

Suspected List							
NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	34.8549	-84.39	-60.95	-13.00	47.95	23.44	Vertical
2	57.1872	-85.01	-62.84	-13.00	49.84	22.17	Vertical
3	1110.0550	-57.71	-61.23	-13.00	48.23	-3.52	Vertical
4	2692.8464	-58.29	-49.34	-13.00	36.34	8.95	Vertical
5	5078.5393	-58.19	-44.11	-13.00	31.11	14.08	Vertical
6	10076.038	-59.88	-36.99	-13.00	23.99	22.89	Vertical

Note: other spurious emissions are 20dB below limit line and no need to report



LTE Band 4 QPSK 20MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	34.8549	-84.65	-59.25	-13.00	46.25	25.40	Horizontal
2	54.2743	-84.73	-63.00	-13.00	50.00	21.73	Horizontal
3	204.774	-95.05	-69.97	-13.00	56.97	25.08	Horizontal
4	3148.57	-58.17	-49.51	-13.00	36.51	8.66	Horizontal
5	6666.33	-59.03	-44.26	-13.00	31.26	14.77	Horizontal
6	10148.0	-59.74	-36.46	-13.00	23.46	23.28	Horizontal
Suspected List							
NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	34.8549	-86.23	-62.79	-13.00	49.79	23.44	Vertical
2	61.0711	-84.08	-61.46	-13.00	48.46	22.62	Vertical
3	604.814	-101.09	-67.01	-13.00	54.01	34.08	Vertical
4	3192.09	-58.28	-48.98	-13.00	35.98	9.30	Vertical
5	5077.03	-59.28	-45.22	-13.00	32.22	14.06	Vertical
6	10328.1	-60.51	-37.04	-13.00	24.04	23.47	Vertical

Note: other spurious emissions are 20dB below limit line and no need to report

LTE Band 5 QPSK 10MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	34.8549	-85.14	-59.74	-13.00	46.74	25.40	Horizontal
2	61.0711	-86.21	-64.44	-13.00	51.44	21.77	Horizontal
3	1854.42	-56.49	-56.50	-13.00	43.50	-0.01	Horizontal
4	2737.86	-56.89	-48.87	-13.00	35.87	8.02	Horizontal
5	3897.44	-58.71	-49.02	-13.00	36.02	9.69	Horizontal
6	10274.1	-60.72	-37.38	-13.00	24.38	23.34	Horizontal



Suspected List							
NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	34.8549	-85.67	-62.23	-13.00	49.23	23.44	Vertical
2	60.1001	-86.44	-63.91	-13.00	50.91	22.53	Vertical
3	1240.12	-56.95	-59.08	-13.00	46.08	-2.13	Vertical
4	2701.85	-57.13	-48.05	-13.00	35.05	9.08	Vertical
5	5111.55	-59.05	-45.05	-13.00	32.05	14.00	Vertical
6	10334.1	-61.02	-37.50	-13.00	24.50	23.52	Vertical

Note: other spurious emissions are 20dB below limit line and no need to report

LTE Band 7 QPSK 20MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	34.8549	-85.38	-61.94	-13.00	48.94	23.44	Vertical
2	60.1001	-84.01	-61.48	-13.00	48.48	22.53	Vertical
3	1191.09	-57.92	-60.15	-13.00	47.15	-2.23	Vertical
4	3897.44	-59.15	-48.97	-13.00	35.97	10.18	Vertical
5	6174.08	-72.93	-44.66	-13.00	31.66	28.27	Vertical
6	10508.2	-60.32	-37.16	-13.00	24.16	23.16	Vertical

Suspected List							
NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	34.8549	-85.28	-59.88	-13.00	46.88	25.40	Horizontal
2	62.0420	-82.94	-61.18	-13.00	48.18	21.76	Horizontal
3	203.803	-95.55	-70.43	-13.00	57.43	25.12	Horizontal
4	3708.35	-57.87	-49.12	-13.00	36.12	8.75	Horizontal
5	7134.56	-60.16	-43.49	-13.00	30.49	16.67	Horizontal
6	10142.0	-59.95	-36.66	-13.00	23.66	23.29	Horizontal

Note: other spurious emissions are 20dB below limit line and no need to report



LTE Band 12 QPSK 15MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	31.9419	-89.53	-63.43	-13.00	50.43	26.10	Horizontal
2	1159.07	-52.60	-56.18	-13.00	43.18	-3.58	Horizontal
3	1404.20	-52.18	-55.18	-13.00	42.18	-3.00	Horizontal
4	3205.60	-58.25	-49.13	-13.00	36.13	9.12	Horizontal
5	3898.94	-57.51	-47.81	-13.00	34.81	9.70	Horizontal
6	10340.1	-59.85	-36.18	-13.00	23.18	23.67	Horizontal

Suspected List							
NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	31.9419	-89.98	-66.14	-13.00	53.14	23.84	Vertical
2	72.7227	-89.45	-65.65	-13.00	52.65	23.80	Vertical
3	3211.60	-58.68	-49.48	-13.00	36.48	9.20	Vertical
4	3897.44	-58.04	-47.86	-13.00	34.86	10.18	Vertical
5	5108.55	-58.78	-44.70	-13.00	31.70	14.08	Vertical
6	10394.1	-61.47	-37.45	-13.00	24.45	24.02	Vertical

Note: other spurious emissions are 20dB below limit line and no need to report

LTE Band 66 QPSK 20MHz BW Middle Channel

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	31.9419	-90.20	-64.10	-13.00	51.10	26.10	Horizontal
2	71.7518	-93.57	-71.93	-13.00	58.93	21.64	Horizontal
3	3144.0720	-57.90	-49.28	-13.00	36.28	8.62	Horizontal
4	3921.4607	-58.16	-48.66	-13.00	35.66	9.50	Horizontal
5	7326.6633	-58.39	-41.65	-13.00	28.65	16.74	Horizontal

NO.	Freq. [MHz]	Reading Level [dBm]	Absolute Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	31.9419	-90.36	-66.52	-13.00	53.52	23.84	Vertical
2	83.4034	-91.56	-66.57	-13.00	53.57	24.99	Vertical
3	2601.8009	-56.33	-50.31	-13.00	37.31	6.02	Vertical
4	3939.4697	-58.63	-48.86	-13.00	35.86	9.77	Vertical
5	5044.0220	-58.56	-44.81	-13.00	31.81	13.75	Vertical

Note: other spurious emissions are 20dB below limit line and no need to report



3. LIST OF MEASURING EQUIPMENT

Description	Manufacturer	Model	Serial No.	Cal. Date	Due Date	Remark
EMI Test Receiver	R&S	ESIB26	A0304218	2018.09.03	2019.09.20	Radiation
Loop Antenna	Schwarz beck	HFH2-Z2	100047	2019.04.26	2022.04.25	Radiation
Broadband antenna (30MHz~1GHz)	R&S	HL562	101341	2017.07.14	2020.07.13	Radiation
Broadband antenna (30MHz~1GHz)	R&S	HL562	101339	2017.07.14	2020.07.13	Radiation
Double ridge horn antenna (1GHz~18GHz)	R&S	HF906	100150	2019.04.27	2022.04.26	Radiation
Double ridge horn antenna (1GHz~18GHz)	R&S	HF906	100149	2019.04.17	2022.04.16	Radiation
Horn antenna (18GHz~26.5GHz)	AR	AT4002A	305753	2017.11.10	2020.11.09	Radiation
Horn antenna (18GHz~26.5GHz)	AR	AT4003A	0329293	2018.09.17	2020.09.16	Radiation
Amplifier 1GHz-18GHz	AR	25S1G4AM1	22018	2018.09.17	2020.09.16	Radiation
Amplifier 20M~3GHz	MILMEGA	80RF1000-250	1064573	2017.10.09	2020.10.08	Radiation
Spectrum Analyzer	KEYSIGHT	N9030A	A160702554	2018.11.15	2019.11.14	Conducted
LISN	ROHDE&SC HWARZ	ESH2-Z5	A0304221	2019.04.30	2020.04.29	Conducted
Test Receiver	R&S	ESCS30	A0304260	2019.05.25	2020.05.24	Conducted
Temperature chamber	Dongguan gaoda instrument CO.LTD	GD-7005-100	130130101	2019.04.22	2020.04.21	Conducted
Wideband Radio Communication tester	R&S	CMW500	149332	2019.04.01	2020.03.31	Conducted
Power Supply	R&S	NGMO1	101037	2019.08.03	2020.08.02	Conducted

**APPENDIX A****Conducted RF (Average) Output Power****Test Result and Data**

Conducted Output Power NormalTC_NormalVol							
Band	Range	BandWidth	RB size/offset	Frequency (MHz)	Modulation	Power (dBm)	Result
FDD02	LowRange	1.4	OneRB_high	1850.7	QPSK	21.02	Pass
FDD02	LowRange	1.4	OneRB_high	1850.7	Q16	20.06	Pass
FDD02	LowRange	1.4	OneRB_low	1850.7	QPSK	21.08	Pass
FDD02	LowRange	1.4	OneRB_low	1850.7	Q16	20.09	Pass
FDD02	LowRange	1.4	OneRB_middle	1850.7	QPSK	21.10	Pass
FDD02	LowRange	1.4	OneRB_middle	1850.7	Q16	20.14	Pass
FDD02	LowRange	1.4	HalfRB_low	1850.7	QPSK	21.07	Pass
FDD02	LowRange	1.4	HalfRB_low	1850.7	Q16	20.26	Pass
FDD02	LowRange	1.4	HalfRB_middle	1850.7	QPSK	21.06	Pass
FDD02	LowRange	1.4	HalfRB_middle	1850.7	Q16	20.24	Pass
FDD02	LowRange	1.4	HalfRB_high	1850.7	QPSK	21.10	Pass
FDD02	LowRange	1.4	HalfRB_high	1850.7	Q16	20.27	Pass
FDD02	LowRange	1.4	fullRB	1850.7	QPSK	20.04	Pass
FDD02	LowRange	1.4	fullRB	1850.7	Q16	19.11	Pass
FDD02	LowRange	3	OneRB_high	1851.5	QPSK	21.71	Pass
FDD02	LowRange	3	OneRB_high	1851.5	Q16	20.77	Pass
FDD02	LowRange	3	OneRB_low	1851.5	QPSK	21.73	Pass
FDD02	LowRange	3	OneRB_low	1851.5	Q16	20.81	Pass
FDD02	LowRange	3	OneRB_middle	1851.5	QPSK	21.90	Pass
FDD02	LowRange	3	OneRB_middle	1851.5	Q16	20.92	Pass
FDD02	LowRange	3	HalfRB_low	1851.5	QPSK	21.78	Pass
FDD02	LowRange	3	HalfRB_low	1851.5	Q16	20.73	Pass
FDD02	LowRange	3	HalfRB_middle	1851.5	QPSK	21.76	Pass
FDD02	LowRange	3	HalfRB_middle	1851.5	Q16	20.72	Pass
FDD02	LowRange	3	HalfRB_high	1851.5	QPSK	21.74	Pass



FDD02	LowRange	3	HalfRB_high	1851.5	Q16	20.74	Pass
FDD02	LowRange	3	fullRB	1851.5	QPSK	20.83	Pass
FDD02	LowRange	3	fullRB	1851.5	Q16	19.78	Pass
FDD02	LowRange	5	OneRB_high	1852.5	QPSK	21.19	Pass
FDD02	LowRange	5	OneRB_high	1852.5	Q16	20.12	Pass
FDD02	LowRange	5	OneRB_low	1852.5	QPSK	21.31	Pass
FDD02	LowRange	5	OneRB_low	1852.5	Q16	20.22	Pass
FDD02	LowRange	5	OneRB_middle	1852.5	QPSK	21.21	Pass
FDD02	LowRange	5	OneRB_middle	1852.5	Q16	20.12	Pass
FDD02	LowRange	5	HalfRB_low	1852.5	QPSK	20.14	Pass
FDD02	LowRange	5	HalfRB_low	1852.5	Q16	19.16	Pass
FDD02	LowRange	5	HalfRB_middle	1852.5	QPSK	20.15	Pass
FDD02	LowRange	5	HalfRB_middle	1852.5	Q16	19.17	Pass
FDD02	LowRange	5	HalfRB_high	1852.5	QPSK	20.11	Pass
FDD02	LowRange	5	HalfRB_high	1852.5	Q16	19.11	Pass
FDD02	LowRange	5	fullRB	1852.5	QPSK	20.13	Pass
FDD02	LowRange	5	fullRB	1852.5	Q16	19.21	Pass
FDD02	LowRange	10	OneRB_high	1855	QPSK	21.24	Pass
FDD02	LowRange	10	OneRB_high	1855	Q16	20.74	Pass
FDD02	LowRange	10	OneRB_low	1855	QPSK	21.42	Pass
FDD02	LowRange	10	OneRB_low	1855	Q16	20.99	Pass
FDD02	LowRange	10	OneRB_middle	1855	QPSK	21.07	Pass
FDD02	LowRange	10	OneRB_middle	1855	Q16	20.63	Pass
FDD02	LowRange	10	HalfRB_low	1855	QPSK	20.21	Pass
FDD02	LowRange	10	HalfRB_low	1855	Q16	19.29	Pass
FDD02	LowRange	10	HalfRB_middle	1855	QPSK	20.23	Pass
FDD02	LowRange	10	HalfRB_middle	1855	Q16	19.29	Pass
FDD02	LowRange	10	HalfRB_high	1855	QPSK	20.10	Pass
FDD02	LowRange	10	HalfRB_high	1855	Q16	19.15	Pass
FDD02	LowRange	10	fullRB	1855	QPSK	20.19	Pass
FDD02	LowRange	10	fullRB	1855	Q16	19.20	Pass
FDD02	LowRange	15	OneRB_high	1857.5	QPSK	21.00	Pass



FDD02	LowRange	15	OneRB_high	1857.5	Q16	20.55	Pass
FDD02	LowRange	15	OneRB_low	1857.5	QPSK	21.33	Pass
FDD02	LowRange	15	OneRB_low	1857.5	Q16	20.86	Pass
FDD02	LowRange	15	OneRB_middle	1857.5	QPSK	21.04	Pass
FDD02	LowRange	15	OneRB_middle	1857.5	Q16	20.65	Pass
FDD02	LowRange	15	HalfRB_low	1857.5	QPSK	20.83	Pass
FDD02	LowRange	15	HalfRB_low	1857.5	Q16	20.84	Pass
FDD02	LowRange	15	HalfRB_middle	1857.5	QPSK	20.85	Pass
FDD02	LowRange	15	HalfRB_middle	1857.5	Q16	20.84	Pass
FDD02	LowRange	15	HalfRB_high	1857.5	QPSK	20.55	Pass
FDD02	LowRange	15	HalfRB_high	1857.5	Q16	20.56	Pass
FDD02	LowRange	15	fullRB	1857.5	QPSK	20.14	Pass
FDD02	LowRange	15	fullRB	1857.5	Q16	19.21	Pass
FDD02	LowRange	20	OneRB_high	1860	QPSK	21.06	Pass
FDD02	LowRange	20	OneRB_high	1860	Q16	20.31	Pass
FDD02	LowRange	20	OneRB_low	1860	QPSK	21.53	Pass
FDD02	LowRange	20	OneRB_low	1860	Q16	20.85	Pass
FDD02	LowRange	20	OneRB_middle	1860	QPSK	21.10	Pass
FDD02	LowRange	20	OneRB_middle	1860	Q16	20.38	Pass
FDD02	LowRange	20	HalfRB_low	1860	QPSK	20.29	Pass
FDD02	LowRange	20	HalfRB_low	1860	Q16	19.26	Pass
FDD02	LowRange	20	HalfRB_middle	1860	QPSK	20.27	Pass
FDD02	LowRange	20	HalfRB_middle	1860	Q16	19.25	Pass
FDD02	LowRange	20	HalfRB_high	1860	QPSK	20.06	Pass
FDD02	LowRange	20	HalfRB_high	1860	Q16	19.07	Pass
FDD02	LowRange	20	fullRB	1860	QPSK	20.15	Pass
FDD02	LowRange	20	fullRB	1860	Q16	19.21	Pass
FDD02	MidRange	1.4	OneRB_high	1880	QPSK	21.57	Pass
FDD02	MidRange	1.4	OneRB_high	1880	Q16	20.40	Pass
FDD02	MidRange	1.4	OneRB_low	1880	QPSK	21.64	Pass
FDD02	MidRange	1.4	OneRB_low	1880	Q16	20.50	Pass
FDD02	MidRange	1.4	OneRB_middle	1880	QPSK	21.79	Pass



FDD02	MidRange	1.4	OneRB_middle	1880	Q16	20.55	Pass
FDD02	MidRange	1.4	HalfRB_low	1880	QPSK	20.69	Pass
FDD02	MidRange	1.4	HalfRB_low	1880	Q16	19.69	Pass
FDD02	MidRange	1.4	HalfRB_middle	1880	QPSK	20.68	Pass
FDD02	MidRange	1.4	HalfRB_middle	1880	Q16	19.67	Pass
FDD02	MidRange	1.4	HalfRB_high	1880	QPSK	20.60	Pass
FDD02	MidRange	1.4	HalfRB_high	1880	Q16	19.59	Pass
FDD02	MidRange	1.4	fullRB	1880	QPSK	20.69	Pass
FDD02	MidRange	1.4	fullRB	1880	Q16	19.68	Pass
FDD02	MidRange	3	OneRB_high	1880	QPSK	21.05	Pass
FDD02	MidRange	3	OneRB_high	1880	Q16	20.42	Pass
FDD02	MidRange	3	OneRB_low	1880	QPSK	20.87	Pass
FDD02	MidRange	3	OneRB_low	1880	Q16	20.44	Pass
FDD02	MidRange	3	OneRB_middle	1880	QPSK	21.06	Pass
FDD02	MidRange	3	OneRB_middle	1880	Q16	20.47	Pass
FDD02	MidRange	3	HalfRB_low	1880	QPSK	20.08	Pass
FDD02	MidRange	3	HalfRB_low	1880	Q16	19.42	Pass
FDD02	MidRange	3	HalfRB_middle	1880	QPSK	20.10	Pass
FDD02	MidRange	3	HalfRB_middle	1880	Q16	19.42	Pass
FDD02	MidRange	3	HalfRB_high	1880	QPSK	19.97	Pass
FDD02	MidRange	3	HalfRB_high	1880	Q16	19.37	Pass
FDD02	MidRange	3	fullRB	1880	QPSK	20.05	Pass
FDD02	MidRange	3	fullRB	1880	Q16	19.16	Pass
FDD02	MidRange	5	OneRB_high	1880	QPSK	20.96	Pass
FDD02	MidRange	5	OneRB_high	1880	Q16	19.94	Pass
FDD02	MidRange	5	OneRB_low	1880	QPSK	20.89	Pass
FDD02	MidRange	5	OneRB_low	1880	Q16	19.87	Pass
FDD02	MidRange	5	OneRB_middle	1880	QPSK	21.07	Pass
FDD02	MidRange	5	OneRB_middle	1880	Q16	20.09	Pass
FDD02	MidRange	5	HalfRB_low	1880	QPSK	21.08	Pass
FDD02	MidRange	5	HalfRB_low	1880	Q16	19.91	Pass
FDD02	MidRange	5	HalfRB_middle	1880	QPSK	21.07	Pass



FDD02	MidRange	5	HalfRB_middle	1880	Q16	19.87	Pass
FDD02	MidRange	5	HalfRB_high	1880	QPSK	21.18	Pass
FDD02	MidRange	5	HalfRB_high	1880	Q16	20.33	Pass
FDD02	MidRange	5	fullRB	1880	QPSK	20.20	Pass
FDD02	MidRange	5	fullRB	1880	Q16	19.39	Pass
FDD02	MidRange	10	OneRB_high	1880	QPSK	21.29	Pass
FDD02	MidRange	10	OneRB_high	1880	Q16	20.25	Pass
FDD02	MidRange	10	OneRB_low	1880	QPSK	21.11	Pass
FDD02	MidRange	10	OneRB_low	1880	Q16	20.20	Pass
FDD02	MidRange	10	OneRB_middle	1880	QPSK	20.89	Pass
FDD02	MidRange	10	OneRB_middle	1880	Q16	20.00	Pass
FDD02	MidRange	10	HalfRB_low	1880	QPSK	20.16	Pass
FDD02	MidRange	10	HalfRB_low	1880	Q16	20.18	Pass
FDD02	MidRange	10	HalfRB_middle	1880	QPSK	20.39	Pass
FDD02	MidRange	10	HalfRB_middle	1880	Q16	20.08	Pass
FDD02	MidRange	10	HalfRB_high	1880	QPSK	20.27	Pass
FDD02	MidRange	10	HalfRB_high	1880	Q16	20.38	Pass
FDD02	MidRange	10	fullRB	1880	QPSK	20.00	Pass
FDD02	MidRange	10	fullRB	1880	Q16	19.15	Pass
FDD02	MidRange	15	OneRB_high	1880	QPSK	21.44	Pass
FDD02	MidRange	15	OneRB_high	1880	Q16	20.49	Pass
FDD02	MidRange	15	OneRB_low	1880	QPSK	21.22	Pass
FDD02	MidRange	15	OneRB_low	1880	Q16	20.41	Pass
FDD02	MidRange	15	OneRB_middle	1880	QPSK	21.08	Pass
FDD02	MidRange	15	OneRB_middle	1880	Q16	20.48	Pass
FDD02	MidRange	15	HalfRB_low	1880	QPSK	20.18	Pass
FDD02	MidRange	15	HalfRB_low	1880	Q16	19.26	Pass
FDD02	MidRange	15	HalfRB_middle	1880	QPSK	20.20	Pass
FDD02	MidRange	15	HalfRB_middle	1880	Q16	19.27	Pass
FDD02	MidRange	15	HalfRB_high	1880	QPSK	20.20	Pass
FDD02	MidRange	15	HalfRB_high	1880	Q16	19.22	Pass
FDD02	MidRange	15	fullRB	1880	QPSK	20.04	Pass



FDD02	MidRange	15	fullRB	1880	Q16	19.11	Pass
FDD02	MidRange	20	OneRB_high	1880	QPSK	21.19	Pass
FDD02	MidRange	20	OneRB_high	1880	Q16	19.63	Pass
FDD02	MidRange	20	OneRB_low	1880	QPSK	21.26	Pass
FDD02	MidRange	20	OneRB_low	1880	Q16	20.23	Pass
FDD02	MidRange	20	OneRB_middle	1880	QPSK	20.90	Pass
FDD02	MidRange	20	OneRB_middle	1880	Q16	19.89	Pass
FDD02	MidRange	20	HalfRB_low	1880	QPSK	20.25	Pass
FDD02	MidRange	20	HalfRB_low	1880	Q16	19.32	Pass
FDD02	MidRange	20	HalfRB_middle	1880	QPSK	20.26	Pass
FDD02	MidRange	20	HalfRB_middle	1880	Q16	19.32	Pass
FDD02	MidRange	20	HalfRB_high	1880	QPSK	20.14	Pass
FDD02	MidRange	20	HalfRB_high	1880	Q16	19.30	Pass
FDD02	MidRange	20	fullRB	1880	QPSK	20.28	Pass
FDD02	MidRange	20	fullRB	1880	Q16	19.39	Pass
FDD02	HighRange	1.4	OneRB_high	1909.3	QPSK	22.01	Pass
FDD02	HighRange	1.4	OneRB_high	1909.3	Q16	20.98	Pass
FDD02	HighRange	1.4	OneRB_low	1909.3	QPSK	22.04	Pass
FDD02	HighRange	1.4	OneRB_low	1909.3	Q16	21.04	Pass
FDD02	HighRange	1.4	OneRB_middle	1909.3	QPSK	22.20	Pass
FDD02	HighRange	1.4	OneRB_middle	1909.3	Q16	21.18	Pass
FDD02	HighRange	1.4	HalfRB_low	1909.3	QPSK	22.09	Pass
FDD02	HighRange	1.4	HalfRB_low	1909.3	Q16	21.27	Pass
FDD02	HighRange	1.4	HalfRB_middle	1909.3	QPSK	22.07	Pass
FDD02	HighRange	1.4	HalfRB_middle	1909.3	Q16	21.30	Pass
FDD02	HighRange	1.4	HalfRB_high	1909.3	QPSK	22.07	Pass
FDD02	HighRange	1.4	HalfRB_high	1909.3	Q16	21.26	Pass
FDD02	HighRange	1.4	fullRB	1909.3	QPSK	21.11	Pass
FDD02	HighRange	1.4	fullRB	1909.3	Q16	20.04	Pass
FDD02	HighRange	3	OneRB_high	1908.5	QPSK	21.55	Pass
FDD02	HighRange	3	OneRB_high	1908.5	Q16	21.04	Pass
FDD02	HighRange	3	OneRB_low	1908.5	QPSK	21.53	Pass



FDD02	HighRange	3	OneRB_low	1908.5	Q16	21.04	Pass
FDD02	HighRange	3	OneRB_middle	1908.5	QPSK	21.57	Pass
FDD02	HighRange	3	OneRB_middle	1908.5	Q16	21.06	Pass
FDD02	HighRange	3	HalfRB_low	1908.5	QPSK	20.44	Pass
FDD02	HighRange	3	HalfRB_low	1908.5	Q16	19.57	Pass
FDD02	HighRange	3	HalfRB_middle	1908.5	QPSK	20.44	Pass
FDD02	HighRange	3	HalfRB_middle	1908.5	Q16	19.67	Pass
FDD02	HighRange	3	HalfRB_high	1908.5	QPSK	20.46	Pass
FDD02	HighRange	3	HalfRB_high	1908.5	Q16	19.61	Pass
FDD02	HighRange	3	fullRB	1908.5	QPSK	20.39	Pass
FDD02	HighRange	3	fullRB	1908.5	Q16	19.51	Pass
FDD02	HighRange	5	OneRB_high	1907.5	QPSK	21.52	Pass
FDD02	HighRange	5	OneRB_high	1907.5	Q16	20.42	Pass
FDD02	HighRange	5	OneRB_low	1907.5	QPSK	21.57	Pass
FDD02	HighRange	5	OneRB_low	1907.5	Q16	20.56	Pass
FDD02	HighRange	5	OneRB_middle	1907.5	QPSK	21.63	Pass
FDD02	HighRange	5	OneRB_middle	1907.5	Q16	20.43	Pass
FDD02	HighRange	5	HalfRB_low	1907.5	QPSK	20.46	Pass
FDD02	HighRange	5	HalfRB_low	1907.5	Q16	19.42	Pass
FDD02	HighRange	5	HalfRB_middle	1907.5	QPSK	20.44	Pass
FDD02	HighRange	5	HalfRB_middle	1907.5	Q16	19.44	Pass
FDD02	HighRange	5	HalfRB_high	1907.5	QPSK	20.46	Pass
FDD02	HighRange	5	HalfRB_high	1907.5	Q16	19.39	Pass
FDD02	HighRange	5	fullRB	1907.5	QPSK	20.46	Pass
FDD02	HighRange	5	fullRB	1907.5	Q16	19.44	Pass
FDD02	HighRange	10	OneRB_high	1905	QPSK	21.43	Pass
FDD02	HighRange	10	OneRB_high	1905	Q16	21.00	Pass
FDD02	HighRange	10	OneRB_low	1905	QPSK	21.42	Pass
FDD02	HighRange	10	OneRB_low	1905	Q16	20.95	Pass
FDD02	HighRange	10	OneRB_middle	1905	QPSK	21.38	Pass
FDD02	HighRange	10	OneRB_middle	1905	Q16	20.93	Pass
FDD02	HighRange	10	HalfRB_low	1905	QPSK	20.49	Pass



FDD02	HighRange	10	HalfRB_low	1905	Q16	19.56	Pass
FDD02	HighRange	10	HalfRB_middle	1905	QPSK	20.49	Pass
FDD02	HighRange	10	HalfRB_middle	1905	Q16	19.53	Pass
FDD02	HighRange	10	HalfRB_high	1905	QPSK	20.46	Pass
FDD02	HighRange	10	HalfRB_high	1905	Q16	19.48	Pass
FDD02	HighRange	10	fullRB	1905	QPSK	20.45	Pass
FDD02	HighRange	10	fullRB	1905	Q16	19.46	Pass
FDD02	HighRange	15	OneRB_high	1902.5	QPSK	21.46	Pass
FDD02	HighRange	15	OneRB_high	1902.5	Q16	21.02	Pass
FDD02	HighRange	15	OneRB_low	1902.5	QPSK	21.46	Pass
FDD02	HighRange	15	OneRB_low	1902.5	Q16	20.98	Pass
FDD02	HighRange	15	OneRB_middle	1902.5	QPSK	21.37	Pass
FDD02	HighRange	15	OneRB_middle	1902.5	Q16	20.94	Pass
FDD02	HighRange	15	HalfRB_low	1902.5	QPSK	20.98	Pass
FDD02	HighRange	15	HalfRB_low	1902.5	Q16	21.00	Pass
FDD02	HighRange	15	HalfRB_middle	1902.5	QPSK	20.98	Pass
FDD02	HighRange	15	HalfRB_middle	1902.5	Q16	20.98	Pass
FDD02	HighRange	15	HalfRB_high	1902.5	QPSK	20.92	Pass
FDD02	HighRange	15	HalfRB_high	1902.5	Q16	20.98	Pass
FDD02	HighRange	15	fullRB	1902.5	QPSK	20.51	Pass
FDD02	HighRange	15	fullRB	1902.5	Q16	19.50	Pass
FDD02	HighRange	20	OneRB_high	1900	QPSK	21.40	Pass
FDD02	HighRange	20	OneRB_high	1900	Q16	20.72	Pass
FDD02	HighRange	20	OneRB_low	1900	QPSK	21.52	Pass
FDD02	HighRange	20	OneRB_low	1900	Q16	20.78	Pass
FDD02	HighRange	20	OneRB_middle	1900	QPSK	21.34	Pass
FDD02	HighRange	20	OneRB_middle	1900	Q16	20.61	Pass
FDD02	HighRange	20	HalfRB_low	1900	QPSK	20.46	Pass
FDD02	HighRange	20	HalfRB_low	1900	Q16	19.41	Pass
FDD02	HighRange	20	HalfRB_middle	1900	QPSK	20.40	Pass
FDD02	HighRange	20	HalfRB_middle	1900	Q16	19.43	Pass
FDD02	HighRange	20	HalfRB_high	1900	QPSK	20.42	Pass



FDD02	HighRange	20	HalfRB_high	1900	Q16	19.42	Pass
FDD02	HighRange	20	fullRB	1900	QPSK	20.47	Pass
FDD02	HighRange	20	fullRB	1900	Q16	19.52	Pass
FDD04	LowRange	1.4	OneRB_high	1710.7	QPSK	21.92	Pass
FDD04	LowRange	1.4	OneRB_high	1710.7	Q16	21.17	Pass
FDD04	LowRange	1.4	OneRB_low	1710.7	QPSK	21.92	Pass
FDD04	LowRange	1.4	OneRB_low	1710.7	Q16	21.28	Pass
FDD04	LowRange	1.4	OneRB_middle	1710.7	QPSK	22.10	Pass
FDD04	LowRange	1.4	OneRB_middle	1710.7	Q16	21.42	Pass
FDD04	LowRange	1.4	HalfRB_low	1710.7	QPSK	21.00	Pass
FDD04	LowRange	1.4	HalfRB_low	1710.7	Q16	20.09	Pass
FDD04	LowRange	1.4	HalfRB_middle	1710.7	QPSK	21.00	Pass
FDD04	LowRange	1.4	HalfRB_middle	1710.7	Q16	20.10	Pass
FDD04	LowRange	1.4	HalfRB_high	1710.7	QPSK	20.99	Pass
FDD04	LowRange	1.4	HalfRB_high	1710.7	Q16	20.04	Pass
FDD04	LowRange	1.4	fullRB	1710.7	QPSK	21.01	Pass
FDD04	LowRange	1.4	fullRB	1710.7	Q16	20.04	Pass
FDD04	LowRange	3	OneRB_high	1711.5	QPSK	21.71	Pass
FDD04	LowRange	3	OneRB_high	1711.5	Q16	20.66	Pass
FDD04	LowRange	3	OneRB_low	1711.5	QPSK	21.69	Pass
FDD04	LowRange	3	OneRB_low	1711.5	Q16	20.75	Pass
FDD04	LowRange	3	OneRB_middle	1711.5	QPSK	21.69	Pass
FDD04	LowRange	3	OneRB_middle	1711.5	Q16	20.73	Pass
FDD04	LowRange	3	HalfRB_low	1711.5	QPSK	20.72	Pass
FDD04	LowRange	3	HalfRB_low	1711.5	Q16	19.77	Pass
FDD04	LowRange	3	HalfRB_middle	1711.5	QPSK	20.78	Pass
FDD04	LowRange	3	HalfRB_middle	1711.5	Q16	19.80	Pass
FDD04	LowRange	3	HalfRB_high	1711.5	QPSK	20.71	Pass
FDD04	LowRange	3	HalfRB_high	1711.5	Q16	19.78	Pass
FDD04	LowRange	3	fullRB	1711.5	QPSK	20.74	Pass
FDD04	LowRange	3	fullRB	1711.5	Q16	19.74	Pass
FDD04	LowRange	5	OneRB_high	1712.5	QPSK	21.70	Pass



FDD04	LowRange	5	OneRB_high	1712.5	Q16	20.67	Pass
FDD04	LowRange	5	OneRB_low	1712.5	QPSK	21.81	Pass
FDD04	LowRange	5	OneRB_low	1712.5	Q16	20.76	Pass
FDD04	LowRange	5	OneRB_middle	1712.5	QPSK	21.85	Pass
FDD04	LowRange	5	OneRB_middle	1712.5	Q16	20.75	Pass
FDD04	LowRange	5	HalfRB_low	1712.5	QPSK	20.75	Pass
FDD04	LowRange	5	HalfRB_low	1712.5	Q16	19.77	Pass
FDD04	LowRange	5	HalfRB_middle	1712.5	QPSK	20.76	Pass
FDD04	LowRange	5	HalfRB_middle	1712.5	Q16	19.75	Pass
FDD04	LowRange	5	HalfRB_high	1712.5	QPSK	20.71	Pass
FDD04	LowRange	5	HalfRB_high	1712.5	Q16	19.71	Pass
FDD04	LowRange	5	fullRB	1712.5	QPSK	20.73	Pass
FDD04	LowRange	5	fullRB	1712.5	Q16	19.77	Pass
FDD04	LowRange	10	OneRB_high	1715	QPSK	21.63	Pass
FDD04	LowRange	10	OneRB_high	1715	Q16	21.17	Pass
FDD04	LowRange	10	OneRB_low	1715	QPSK	21.83	Pass
FDD04	LowRange	10	OneRB_low	1715	Q16	21.39	Pass
FDD04	LowRange	10	OneRB_middle	1715	QPSK	21.69	Pass
FDD04	LowRange	10	OneRB_middle	1715	Q16	21.29	Pass
FDD04	LowRange	10	HalfRB_low	1715	QPSK	20.81	Pass
FDD04	LowRange	10	HalfRB_low	1715	Q16	19.85	Pass
FDD04	LowRange	10	HalfRB_middle	1715	QPSK	20.80	Pass
FDD04	LowRange	10	HalfRB_middle	1715	Q16	19.87	Pass
FDD04	LowRange	10	HalfRB_high	1715	QPSK	20.75	Pass
FDD04	LowRange	10	HalfRB_high	1715	Q16	19.83	Pass
FDD04	LowRange	10	fullRB	1715	QPSK	20.82	Pass
FDD04	LowRange	10	fullRB	1715	Q16	19.74	Pass
FDD04	LowRange	15	OneRB_high	1717.5	QPSK	21.65	Pass
FDD04	LowRange	15	OneRB_high	1717.5	Q16	21.23	Pass
FDD04	LowRange	15	OneRB_low	1717.5	QPSK	21.77	Pass
FDD04	LowRange	15	OneRB_low	1717.5	Q16	21.33	Pass
FDD04	LowRange	15	OneRB_middle	1717.5	QPSK	21.57	Pass



FDD04	LowRange	15	OneRB_middle	1717.5	Q16	21.14	Pass
FDD04	LowRange	15	HalfRB_low	1717.5	QPSK	21.35	Pass
FDD04	LowRange	15	HalfRB_low	1717.5	Q16	21.36	Pass
FDD04	LowRange	15	HalfRB_middle	1717.5	QPSK	21.44	Pass
FDD04	LowRange	15	HalfRB_middle	1717.5	Q16	21.33	Pass
FDD04	LowRange	15	HalfRB_high	1717.5	QPSK	21.24	Pass
FDD04	LowRange	15	HalfRB_high	1717.5	Q16	21.25	Pass
FDD04	LowRange	15	fullRB	1717.5	QPSK	20.68	Pass
FDD04	LowRange	15	fullRB	1717.5	Q16	19.66	Pass
FDD04	LowRange	20	OneRB_high	1720	QPSK	21.65	Pass
FDD04	LowRange	20	OneRB_high	1720	Q16	21.00	Pass
FDD04	LowRange	20	OneRB_low	1720	QPSK	21.85	Pass
FDD04	LowRange	20	OneRB_low	1720	Q16	21.15	Pass
FDD04	LowRange	20	OneRB_middle	1720	QPSK	21.60	Pass
FDD04	LowRange	20	OneRB_middle	1720	Q16	20.94	Pass
FDD04	LowRange	20	HalfRB_low	1720	QPSK	20.80	Pass
FDD04	LowRange	20	HalfRB_low	1720	Q16	19.75	Pass
FDD04	LowRange	20	HalfRB_middle	1720	QPSK	20.82	Pass
FDD04	LowRange	20	HalfRB_middle	1720	Q16	19.75	Pass
FDD04	LowRange	20	HalfRB_high	1720	QPSK	20.74	Pass
FDD04	LowRange	20	HalfRB_high	1720	Q16	19.72	Pass
FDD04	LowRange	20	fullRB	1720	QPSK	20.66	Pass
FDD04	LowRange	20	fullRB	1720	Q16	19.67	Pass
FDD04	MidRange	1.4	OneRB_high	1732.5	QPSK	21.38	Pass
FDD04	MidRange	1.4	OneRB_high	1732.5	Q16	20.52	Pass
FDD04	MidRange	1.4	OneRB_low	1732.5	QPSK	21.97	Pass
FDD04	MidRange	1.4	OneRB_low	1732.5	Q16	21.61	Pass
FDD04	MidRange	1.4	OneRB_middle	1732.5	QPSK	22.15	Pass
FDD04	MidRange	1.4	OneRB_middle	1732.5	Q16	21.77	Pass
FDD04	MidRange	1.4	HalfRB_low	1732.5	QPSK	21.03	Pass
FDD04	MidRange	1.4	HalfRB_low	1732.5	Q16	20.09	Pass
FDD04	MidRange	1.4	HalfRB_middle	1732.5	QPSK	21.06	Pass



FDD04	MidRange	1.4	HalfRB_middle	1732.5	Q16	20.09	Pass
FDD04	MidRange	1.4	HalfRB_high	1732.5	QPSK	21.09	Pass
FDD04	MidRange	1.4	HalfRB_high	1732.5	Q16	20.18	Pass
FDD04	MidRange	1.4	fullRB	1732.5	QPSK	21.09	Pass
FDD04	MidRange	1.4	fullRB	1732.5	Q16	20.08	Pass
FDD04	MidRange	3	OneRB_high	1732.5	QPSK	21.16	Pass
FDD04	MidRange	3	OneRB_high	1732.5	Q16	20.36	Pass
FDD04	MidRange	3	OneRB_low	1732.5	QPSK	21.12	Pass
FDD04	MidRange	3	OneRB_low	1732.5	Q16	20.63	Pass
FDD04	MidRange	3	OneRB_middle	1732.5	QPSK	21.25	Pass
FDD04	MidRange	3	OneRB_middle	1732.5	Q16	20.47	Pass
FDD04	MidRange	3	HalfRB_low	1732.5	QPSK	20.27	Pass
FDD04	MidRange	3	HalfRB_low	1732.5	Q16	19.80	Pass
FDD04	MidRange	3	HalfRB_middle	1732.5	QPSK	20.47	Pass
FDD04	MidRange	3	HalfRB_middle	1732.5	Q16	19.70	Pass
FDD04	MidRange	3	HalfRB_high	1732.5	QPSK	20.42	Pass
FDD04	MidRange	3	HalfRB_high	1732.5	Q16	19.56	Pass
FDD04	MidRange	3	fullRB	1732.5	QPSK	20.29	Pass
FDD04	MidRange	3	fullRB	1732.5	Q16	19.52	Pass
FDD04	MidRange	5	OneRB_high	1732.5	QPSK	21.20	Pass
FDD04	MidRange	5	OneRB_high	1732.5	Q16	20.01	Pass
FDD04	MidRange	5	OneRB_low	1732.5	QPSK	21.07	Pass
FDD04	MidRange	5	OneRB_low	1732.5	Q16	20.23	Pass
FDD04	MidRange	5	OneRB_middle	1732.5	QPSK	21.02	Pass
FDD04	MidRange	5	OneRB_middle	1732.5	Q16	19.91	Pass
FDD04	MidRange	5	HalfRB_low	1732.5	QPSK	20.24	Pass
FDD04	MidRange	5	HalfRB_low	1732.5	Q16	19.31	Pass
FDD04	MidRange	5	HalfRB_middle	1732.5	QPSK	20.25	Pass
FDD04	MidRange	5	HalfRB_middle	1732.5	Q16	19.31	Pass
FDD04	MidRange	5	HalfRB_high	1732.5	QPSK	20.25	Pass
FDD04	MidRange	5	HalfRB_high	1732.5	Q16	19.32	Pass
FDD04	MidRange	5	fullRB	1732.5	QPSK	20.38	Pass



FDD04	MidRange	5	fullRB	1732.5	Q16	19.50	Pass
FDD04	MidRange	10	OneRB_high	1732.5	QPSK	21.36	Pass
FDD04	MidRange	10	OneRB_high	1732.5	Q16	20.22	Pass
FDD04	MidRange	10	OneRB_low	1732.5	QPSK	21.29	Pass
FDD04	MidRange	10	OneRB_low	1732.5	Q16	20.16	Pass
FDD04	MidRange	10	OneRB_middle	1732.5	QPSK	21.33	Pass
FDD04	MidRange	10	OneRB_middle	1732.5	Q16	20.42	Pass
FDD04	MidRange	10	HalfRB_low	1732.5	QPSK	21.24	Pass
FDD04	MidRange	10	HalfRB_low	1732.5	Q16	20.03	Pass
FDD04	MidRange	10	HalfRB_middle	1732.5	QPSK	20.19	Pass
FDD04	MidRange	10	HalfRB_middle	1732.5	Q16	19.47	Pass
FDD04	MidRange	10	HalfRB_high	1732.5	QPSK	21.69	Pass
FDD04	MidRange	10	HalfRB_high	1732.5	Q16	20.14	Pass
FDD04	MidRange	10	fullRB	1732.5	QPSK	20.59	Pass
FDD04	MidRange	10	fullRB	1732.5	Q16	21.38	Pass
FDD04	MidRange	15	OneRB_high	1732.5	QPSK	21.59	Pass
FDD04	MidRange	15	OneRB_high	1732.5	Q16	20.37	Pass
FDD04	MidRange	15	OneRB_low	1732.5	QPSK	21.37	Pass
FDD04	MidRange	15	OneRB_low	1732.5	Q16	21.67	Pass
FDD04	MidRange	15	OneRB_middle	1732.5	QPSK	21.92	Pass
FDD04	MidRange	15	OneRB_middle	1732.5	Q16	21.90	Pass
FDD04	MidRange	15	HalfRB_low	1732.5	QPSK	21.65	Pass
FDD04	MidRange	15	HalfRB_low	1732.5	Q16	21.15	Pass
FDD04	MidRange	15	HalfRB_middle	1732.5	QPSK	21.92	Pass
FDD04	MidRange	15	HalfRB_middle	1732.5	Q16	20.35	Pass
FDD04	MidRange	15	HalfRB_high	1732.5	QPSK	20.18	Pass
FDD04	MidRange	15	HalfRB_high	1732.5	Q16	19.32	Pass
FDD04	MidRange	15	fullRB	1732.5	QPSK	20.27	Pass
FDD04	MidRange	15	fullRB	1732.5	Q16	19.37	Pass
FDD04	MidRange	20	OneRB_high	1732.5	QPSK	21.17	Pass
FDD04	MidRange	20	OneRB_high	1732.5	Q16	20.76	Pass
FDD04	MidRange	20	OneRB_low	1732.5	QPSK	21.22	Pass



FDD04	MidRange	20	OneRB_low	1732.5	Q16	21.09	Pass
FDD04	MidRange	20	OneRB_middle	1732.5	QPSK	21.21	Pass
FDD04	MidRange	20	OneRB_middle	1732.5	Q16	20.55	Pass
FDD04	MidRange	20	HalfRB_low	1732.5	QPSK	20.27	Pass
FDD04	MidRange	20	HalfRB_low	1732.5	Q16	19.39	Pass
FDD04	MidRange	20	HalfRB_middle	1732.5	QPSK	20.38	Pass
FDD04	MidRange	20	HalfRB_middle	1732.5	Q16	19.41	Pass
FDD04	MidRange	20	HalfRB_high	1732.5	QPSK	20.17	Pass
FDD04	MidRange	20	HalfRB_high	1732.5	Q16	19.39	Pass
FDD04	MidRange	20	fullRB	1732.5	QPSK	20.34	Pass
FDD04	MidRange	20	fullRB	1732.5	Q16	19.40	Pass
FDD04	HighRange	1.4	OneRB_high	1754.3	QPSK	21.65	Pass
FDD04	HighRange	1.4	OneRB_high	1754.3	Q16	20.74	Pass
FDD04	HighRange	1.4	OneRB_low	1754.3	QPSK	21.62	Pass
FDD04	HighRange	1.4	OneRB_low	1754.3	Q16	20.69	Pass
FDD04	HighRange	1.4	OneRB_middle	1754.3	QPSK	21.80	Pass
FDD04	HighRange	1.4	OneRB_middle	1754.3	Q16	20.88	Pass
FDD04	HighRange	1.4	HalfRB_low	1754.3	QPSK	21.69	Pass
FDD04	HighRange	1.4	HalfRB_low	1754.3	Q16	20.67	Pass
FDD04	HighRange	1.4	HalfRB_middle	1754.3	QPSK	21.69	Pass
FDD04	HighRange	1.4	HalfRB_middle	1754.3	Q16	20.66	Pass
FDD04	HighRange	1.4	HalfRB_high	1754.3	QPSK	21.69	Pass
FDD04	HighRange	1.4	HalfRB_high	1754.3	Q16	20.68	Pass
FDD04	HighRange	1.4	fullRB	1754.3	QPSK	20.68	Pass
FDD04	HighRange	1.4	fullRB	1754.3	Q16	19.70	Pass
FDD04	HighRange	3	OneRB_high	1753.5	QPSK	21.41	Pass
FDD04	HighRange	3	OneRB_high	1753.5	Q16	20.98	Pass
FDD04	HighRange	3	OneRB_low	1753.5	QPSK	21.44	Pass
FDD04	HighRange	3	OneRB_low	1753.5	Q16	21.08	Pass
FDD04	HighRange	3	OneRB_middle	1753.5	QPSK	21.37	Pass
FDD04	HighRange	3	OneRB_middle	1753.5	Q16	20.99	Pass
FDD04	HighRange	3	HalfRB_low	1753.5	QPSK	20.49	Pass



FDD04	HighRange	3	HalfRB_low	1753.5	Q16	19.63	Pass
FDD04	HighRange	3	HalfRB_middle	1753.5	QPSK	20.47	Pass
FDD04	HighRange	3	HalfRB_middle	1753.5	Q16	19.63	Pass
FDD04	HighRange	3	HalfRB_high	1753.5	QPSK	20.45	Pass
FDD04	HighRange	3	HalfRB_high	1753.5	Q16	19.65	Pass
FDD04	HighRange	3	fullRB	1753.5	QPSK	20.42	Pass
FDD04	HighRange	3	fullRB	1753.5	Q16	19.54	Pass
FDD04	HighRange	5	OneRB_high	1752.5	QPSK	21.48	Pass
FDD04	HighRange	5	OneRB_high	1752.5	Q16	20.40	Pass
FDD04	HighRange	5	OneRB_low	1752.5	QPSK	21.64	Pass
FDD04	HighRange	5	OneRB_low	1752.5	Q16	20.52	Pass
FDD04	HighRange	5	OneRB_middle	1752.5	QPSK	21.65	Pass
FDD04	HighRange	5	OneRB_middle	1752.5	Q16	20.52	Pass
FDD04	HighRange	5	HalfRB_low	1752.5	QPSK	20.52	Pass
FDD04	HighRange	5	HalfRB_low	1752.5	Q16	19.49	Pass
FDD04	HighRange	5	HalfRB_middle	1752.5	QPSK	20.51	Pass
FDD04	HighRange	5	HalfRB_middle	1752.5	Q16	19.49	Pass
FDD04	HighRange	5	HalfRB_high	1752.5	QPSK	20.45	Pass
FDD04	HighRange	5	HalfRB_high	1752.5	Q16	19.43	Pass
FDD04	HighRange	5	fullRB	1752.5	QPSK	20.45	Pass
FDD04	HighRange	5	fullRB	1752.5	Q16	19.49	Pass
FDD04	HighRange	10	OneRB_high	1750	QPSK	21.40	Pass
FDD04	HighRange	10	OneRB_high	1750	Q16	20.87	Pass
FDD04	HighRange	10	OneRB_low	1750	QPSK	21.64	Pass
FDD04	HighRange	10	OneRB_low	1750	Q16	21.14	Pass
FDD04	HighRange	10	OneRB_middle	1750	QPSK	21.47	Pass
FDD04	HighRange	10	OneRB_middle	1750	Q16	21.14	Pass
FDD04	HighRange	10	HalfRB_low	1750	QPSK	20.57	Pass
FDD04	HighRange	10	HalfRB_low	1750	Q16	19.63	Pass
FDD04	HighRange	10	HalfRB_middle	1750	QPSK	20.60	Pass
FDD04	HighRange	10	HalfRB_middle	1750	Q16	19.66	Pass
FDD04	HighRange	10	HalfRB_high	1750	QPSK	20.46	Pass



FDD04	HighRange	10	HalfRB_high	1750	Q16	19.52	Pass
FDD04	HighRange	10	fullRB	1750	QPSK	20.51	Pass
FDD04	HighRange	10	fullRB	1750	Q16	19.53	Pass
FDD04	HighRange	15	OneRB_high	1747.5	QPSK	21.41	Pass
FDD04	HighRange	15	OneRB_high	1747.5	Q16	21.02	Pass
FDD04	HighRange	15	OneRB_low	1747.5	QPSK	21.72	Pass
FDD04	HighRange	15	OneRB_low	1747.5	Q16	21.28	Pass
FDD04	HighRange	15	OneRB_middle	1747.5	QPSK	21.52	Pass
FDD04	HighRange	15	OneRB_middle	1747.5	Q16	20.98	Pass
FDD04	HighRange	15	HalfRB_low	1747.5	QPSK	21.23	Pass
FDD04	HighRange	15	HalfRB_low	1747.5	Q16	21.34	Pass
FDD04	HighRange	15	HalfRB_middle	1747.5	QPSK	21.27	Pass
FDD04	HighRange	15	HalfRB_middle	1747.5	Q16	21.28	Pass
FDD04	HighRange	15	HalfRB_high	1747.5	QPSK	21.11	Pass
FDD04	HighRange	15	HalfRB_high	1747.5	Q16	21.04	Pass
FDD04	HighRange	15	fullRB	1747.5	QPSK	20.61	Pass
FDD04	HighRange	15	fullRB	1747.5	Q16	19.60	Pass
FDD04	HighRange	20	OneRB_high	1745	QPSK	21.46	Pass
FDD04	HighRange	20	OneRB_high	1745	Q16	20.61	Pass
FDD04	HighRange	20	OneRB_low	1745	QPSK	21.79	Pass
FDD04	HighRange	20	OneRB_low	1745	Q16	21.11	Pass
FDD04	HighRange	20	OneRB_middle	1745	QPSK	22.05	Pass
FDD04	HighRange	20	OneRB_middle	1745	Q16	21.86	Pass
FDD04	HighRange	20	HalfRB_low	1745	QPSK	20.72	Pass
FDD04	HighRange	20	HalfRB_low	1745	Q16	19.67	Pass
FDD04	HighRange	20	HalfRB_middle	1745	QPSK	20.71	Pass
FDD04	HighRange	20	HalfRB_middle	1745	Q16	19.68	Pass
FDD04	HighRange	20	HalfRB_high	1745	QPSK	20.50	Pass
FDD04	HighRange	20	HalfRB_high	1745	Q16	19.50	Pass
FDD04	HighRange	20	fullRB	1745	QPSK	20.61	Pass
FDD04	HighRange	20	fullRB	1745	Q16	19.61	Pass
FDD05	LowRange	1.4	OneRB_high	824.7	QPSK	21.96	Pass



FDD05	LowRange	1.4	OneRB_high	824.7	Q16	21.07	Pass
FDD05	LowRange	1.4	OneRB_low	824.7	QPSK	21.63	Pass
FDD05	LowRange	1.4	OneRB_low	824.7	Q16	20.86	Pass
FDD05	LowRange	1.4	OneRB_middle	824.7	QPSK	21.76	Pass
FDD05	LowRange	1.4	OneRB_middle	824.7	Q16	21.03	Pass
FDD05	LowRange	1.4	HalfRB_low	824.7	QPSK	20.63	Pass
FDD05	LowRange	1.4	HalfRB_low	824.7	Q16	19.69	Pass
FDD05	LowRange	1.4	HalfRB_middle	824.7	QPSK	20.62	Pass
FDD05	LowRange	1.4	HalfRB_middle	824.7	Q16	19.69	Pass
FDD05	LowRange	1.4	HalfRB_high	824.7	QPSK	20.64	Pass
FDD05	LowRange	1.4	HalfRB_high	824.7	Q16	19.69	Pass
FDD05	LowRange	1.4	fullRB	824.7	QPSK	20.68	Pass
FDD05	LowRange	1.4	fullRB	824.7	Q16	19.66	Pass
FDD05	LowRange	3	OneRB_high	825.5	QPSK	21.87	Pass
FDD05	LowRange	3	OneRB_high	825.5	Q16	20.94	Pass
FDD05	LowRange	3	OneRB_low	825.5	QPSK	22.01	Pass
FDD05	LowRange	3	OneRB_low	825.5	Q16	21.05	Pass
FDD05	LowRange	3	OneRB_middle	825.5	QPSK	21.97	Pass
FDD05	LowRange	3	OneRB_middle	825.5	Q16	21.01	Pass
FDD05	LowRange	3	HalfRB_low	825.5	QPSK	21.04	Pass
FDD05	LowRange	3	HalfRB_low	825.5	Q16	20.16	Pass
FDD05	LowRange	3	HalfRB_middle	825.5	QPSK	21.08	Pass
FDD05	LowRange	3	HalfRB_middle	825.5	Q16	20.13	Pass
FDD05	LowRange	3	HalfRB_high	825.5	QPSK	21.00	Pass
FDD05	LowRange	3	HalfRB_high	825.5	Q16	20.11	Pass
FDD05	LowRange	3	fullRB	825.5	QPSK	21.07	Pass
FDD05	LowRange	3	fullRB	825.5	Q16	20.10	Pass
FDD05	LowRange	5	OneRB_high	826.5	QPSK	22.04	Pass
FDD05	LowRange	5	OneRB_high	826.5	Q16	20.99	Pass
FDD05	LowRange	5	OneRB_low	826.5	QPSK	22.03	Pass
FDD05	LowRange	5	OneRB_low	826.5	Q16	20.98	Pass
FDD05	LowRange	5	OneRB_middle	826.5	QPSK	22.08	Pass



FDD05	LowRange	5	OneRB_middle	826.5	Q16	21.01	Pass
FDD05	LowRange	5	HalfRB_low	826.5	QPSK	21.08	Pass
FDD05	LowRange	5	HalfRB_low	826.5	Q16	20.10	Pass
FDD05	LowRange	5	HalfRB_middle	826.5	QPSK	21.11	Pass
FDD05	LowRange	5	HalfRB_middle	826.5	Q16	20.10	Pass
FDD05	LowRange	5	HalfRB_high	826.5	QPSK	21.09	Pass
FDD05	LowRange	5	HalfRB_high	826.5	Q16	20.14	Pass
FDD05	LowRange	5	fullRB	826.5	QPSK	21.08	Pass
FDD05	LowRange	5	fullRB	826.5	Q16	20.12	Pass
FDD05	LowRange	10	OneRB_high	829	QPSK	21.94	Pass
FDD05	LowRange	10	OneRB_high	829	Q16	21.57	Pass
FDD05	LowRange	10	OneRB_low	829	QPSK	21.96	Pass
FDD05	LowRange	10	OneRB_low	829	Q16	21.64	Pass
FDD05	LowRange	10	OneRB_middle	829	QPSK	21.97	Pass
FDD05	LowRange	10	OneRB_middle	829	Q16	21.56	Pass
FDD05	LowRange	10	HalfRB_low	829	QPSK	21.02	Pass
FDD05	LowRange	10	HalfRB_low	829	Q16	20.07	Pass
FDD05	LowRange	10	HalfRB_middle	829	QPSK	21.04	Pass
FDD05	LowRange	10	HalfRB_middle	829	Q16	20.07	Pass
FDD05	LowRange	10	HalfRB_high	829	QPSK	21.03	Pass
FDD05	LowRange	10	HalfRB_high	829	Q16	20.07	Pass
FDD05	LowRange	10	fullRB	829	QPSK	21.10	Pass
FDD05	LowRange	10	fullRB	829	Q16	20.10	Pass
FDD05	MidRange	1.4	OneRB_high	836.5	QPSK	21.91	Pass
FDD05	MidRange	1.4	OneRB_high	836.5	Q16	21.04	Pass
FDD05	MidRange	1.4	OneRB_low	836.5	QPSK	21.56	Pass
FDD05	MidRange	1.4	OneRB_low	836.5	Q16	20.97	Pass
FDD05	MidRange	1.4	OneRB_middle	836.5	QPSK	21.71	Pass
FDD05	MidRange	1.4	OneRB_middle	836.5	Q16	21.19	Pass
FDD05	MidRange	1.4	HalfRB_low	836.5	QPSK	21.01	Pass
FDD05	MidRange	1.4	HalfRB_low	836.5	Q16	20.95	Pass
FDD05	MidRange	1.4	HalfRB_middle	836.5	QPSK	20.99	Pass



FDD05	MidRange	1.4	HalfRB_middle	836.5	Q16	20.99	Pass
FDD05	MidRange	1.4	HalfRB_high	836.5	QPSK	21.07	Pass
FDD05	MidRange	1.4	HalfRB_high	836.5	Q16	21.08	Pass
FDD05	MidRange	1.4	fullRB	836.5	QPSK	20.79	Pass
FDD05	MidRange	1.4	fullRB	836.5	Q16	19.71	Pass
FDD05	MidRange	3	OneRB_high	836.5	QPSK	21.61	Pass
FDD05	MidRange	3	OneRB_high	836.5	Q16	21.91	Pass
FDD05	MidRange	3	OneRB_low	836.5	QPSK	21.50	Pass
FDD05	MidRange	3	OneRB_low	836.5	Q16	21.82	Pass
FDD05	MidRange	3	OneRB_middle	836.5	QPSK	21.62	Pass
FDD05	MidRange	3	OneRB_middle	836.5	Q16	21.04	Pass
FDD05	MidRange	3	HalfRB_low	836.5	QPSK	21.71	Pass
FDD05	MidRange	3	HalfRB_low	836.5	Q16	20.78	Pass
FDD05	MidRange	3	HalfRB_middle	836.5	QPSK	21.67	Pass
FDD05	MidRange	3	HalfRB_middle	836.5	Q16	20.75	Pass
FDD05	MidRange	3	HalfRB_high	836.5	QPSK	21.66	Pass
FDD05	MidRange	3	HalfRB_high	836.5	Q16	20.74	Pass
FDD05	MidRange	3	fullRB	836.5	QPSK	21.71	Pass
FDD05	MidRange	3	fullRB	836.5	Q16	20.54	Pass
FDD05	MidRange	5	OneRB_high	836.5	QPSK	21.47	Pass
FDD05	MidRange	5	OneRB_high	836.5	Q16	21.17	Pass
FDD05	MidRange	5	OneRB_low	836.5	QPSK	21.58	Pass
FDD05	MidRange	5	OneRB_low	836.5	Q16	21.15	Pass
FDD05	MidRange	5	OneRB_middle	836.5	QPSK	21.62	Pass
FDD05	MidRange	5	OneRB_middle	836.5	Q16	21.29	Pass
FDD05	MidRange	5	HalfRB_low	836.5	QPSK	21.63	Pass
FDD05	MidRange	5	HalfRB_low	836.5	Q16	20.59	Pass
FDD05	MidRange	5	HalfRB_middle	836.5	QPSK	21.60	Pass
FDD05	MidRange	5	HalfRB_middle	836.5	Q16	20.51	Pass
FDD05	MidRange	5	HalfRB_high	836.5	QPSK	21.60	Pass
FDD05	MidRange	5	HalfRB_high	836.5	Q16	20.56	Pass
FDD05	MidRange	5	fullRB	836.5	QPSK	21.55	Pass



FDD05	MidRange	5	fullRB	836.5	Q16	20.57	Pass
FDD05	MidRange	10	OneRB_high	836.5	QPSK	21.53	Pass
FDD05	MidRange	10	OneRB_high	836.5	Q16	21.94	Pass
FDD05	MidRange	10	OneRB_low	836.5	QPSK	21.50	Pass
FDD05	MidRange	10	OneRB_low	836.5	Q16	21.54	Pass
FDD05	MidRange	10	OneRB_middle	836.5	QPSK	21.74	Pass
FDD05	MidRange	10	OneRB_middle	836.5	Q16	21.30	Pass
FDD05	MidRange	10	HalfRB_low	836.5	QPSK	21.73	Pass
FDD05	MidRange	10	HalfRB_low	836.5	Q16	20.68	Pass
FDD05	MidRange	10	HalfRB_middle	836.5	QPSK	21.75	Pass
FDD05	MidRange	10	HalfRB_middle	836.5	Q16	20.68	Pass
FDD05	MidRange	10	HalfRB_high	836.5	QPSK	21.76	Pass
FDD05	MidRange	10	HalfRB_high	836.5	Q16	20.69	Pass
FDD05	MidRange	10	fullRB	836.5	QPSK	21.64	Pass
FDD05	MidRange	10	fullRB	836.5	Q16	20.70	Pass
FDD05	HighRange	1.4	OneRB_high	848.3	QPSK	21.55	Pass
FDD05	HighRange	1.4	OneRB_high	848.3	Q16	21.78	Pass
FDD05	HighRange	1.4	OneRB_low	848.3	QPSK	21.55	Pass
FDD05	HighRange	1.4	OneRB_low	848.3	Q16	21.80	Pass
FDD05	HighRange	1.4	OneRB_middle	848.3	QPSK	21.70	Pass
FDD05	HighRange	1.4	OneRB_middle	848.3	Q16	21.20	Pass
FDD05	HighRange	1.4	HalfRB_low	848.3	QPSK	21.63	Pass
FDD05	HighRange	1.4	HalfRB_low	848.3	Q16	21.71	Pass
FDD05	HighRange	1.4	HalfRB_middle	848.3	QPSK	21.84	Pass
FDD05	HighRange	1.4	HalfRB_middle	848.3	Q16	21.70	Pass
FDD05	HighRange	1.4	HalfRB_high	848.3	QPSK	21.69	Pass
FDD05	HighRange	1.4	HalfRB_high	848.3	Q16	21.81	Pass
FDD05	HighRange	1.4	fullRB	848.3	QPSK	21.70	Pass
FDD05	HighRange	1.4	fullRB	848.3	Q16	20.86	Pass
FDD05	HighRange	3	OneRB_high	847.5	QPSK	22.01	Pass
FDD05	HighRange	3	OneRB_high	847.5	Q16	21.63	Pass
FDD05	HighRange	3	OneRB_low	847.5	QPSK	22.14	Pass



FDD05	HighRange	3	OneRB_low	847.5	Q16	21.73	Pass
FDD05	HighRange	3	OneRB_middle	847.5	QPSK	22.07	Pass
FDD05	HighRange	3	OneRB_middle	847.5	Q16	21.75	Pass
FDD05	HighRange	3	HalfRB_low	847.5	QPSK	21.16	Pass
FDD05	HighRange	3	HalfRB_low	847.5	Q16	20.30	Pass
FDD05	HighRange	3	HalfRB_middle	847.5	QPSK	21.15	Pass
FDD05	HighRange	3	HalfRB_middle	847.5	Q16	20.33	Pass
FDD05	HighRange	3	HalfRB_high	847.5	QPSK	21.10	Pass
FDD05	HighRange	3	HalfRB_high	847.5	Q16	20.30	Pass
FDD05	HighRange	3	fullRB	847.5	QPSK	21.16	Pass
FDD05	HighRange	3	fullRB	847.5	Q16	20.20	Pass
FDD05	HighRange	5	OneRB_high	846.5	QPSK	22.07	Pass
FDD05	HighRange	5	OneRB_high	846.5	Q16	21.03	Pass
FDD05	HighRange	5	OneRB_low	846.5	QPSK	22.16	Pass
FDD05	HighRange	5	OneRB_low	846.5	Q16	21.09	Pass
FDD05	HighRange	5	OneRB_middle	846.5	QPSK	22.23	Pass
FDD05	HighRange	5	OneRB_middle	846.5	Q16	21.14	Pass
FDD05	HighRange	5	HalfRB_low	846.5	QPSK	21.22	Pass
FDD05	HighRange	5	HalfRB_low	846.5	Q16	20.24	Pass
FDD05	HighRange	5	HalfRB_middle	846.5	QPSK	21.23	Pass
FDD05	HighRange	5	HalfRB_middle	846.5	Q16	20.22	Pass
FDD05	HighRange	5	HalfRB_high	846.5	QPSK	21.15	Pass
FDD05	HighRange	5	HalfRB_high	846.5	Q16	20.17	Pass
FDD05	HighRange	5	fullRB	846.5	QPSK	21.18	Pass
FDD05	HighRange	5	fullRB	846.5	Q16	20.22	Pass
FDD05	HighRange	10	OneRB_high	844	QPSK	21.87	Pass
FDD05	HighRange	10	OneRB_high	844	Q16	21.55	Pass
FDD05	HighRange	10	OneRB_low	844	QPSK	22.05	Pass
FDD05	HighRange	10	OneRB_low	844	Q16	21.70	Pass
FDD05	HighRange	10	OneRB_middle	844	QPSK	21.92	Pass
FDD05	HighRange	10	OneRB_middle	844	Q16	21.56	Pass
FDD05	HighRange	10	HalfRB_low	844	QPSK	21.14	Pass



FDD05	HighRange	10	HalfRB_low	844	Q16	20.17	Pass
FDD05	HighRange	10	HalfRB_middle	844	QPSK	21.09	Pass
FDD05	HighRange	10	HalfRB_middle	844	Q16	20.17	Pass
FDD05	HighRange	10	HalfRB_high	844	QPSK	21.05	Pass
FDD05	HighRange	10	HalfRB_high	844	Q16	20.13	Pass
FDD05	HighRange	10	fullRB	844	QPSK	21.13	Pass
FDD05	HighRange	10	fullRB	844	Q16	20.15	Pass
FDD07	LowRange	5	OneRB_high	2502.5	QPSK	20.67	Pass
FDD07	LowRange	5	OneRB_high	2502.5	Q16	19.64	Pass
FDD07	LowRange	5	OneRB_low	2502.5	QPSK	20.81	Pass
FDD07	LowRange	5	OneRB_low	2502.5	Q16	19.73	Pass
FDD07	LowRange	5	OneRB_middle	2502.5	QPSK	20.83	Pass
FDD07	LowRange	5	OneRB_middle	2502.5	Q16	19.78	Pass
FDD07	LowRange	5	HalfRB_low	2502.5	QPSK	19.80	Pass
FDD07	LowRange	5	HalfRB_low	2502.5	Q16	18.82	Pass
FDD07	LowRange	5	HalfRB_middle	2502.5	QPSK	19.79	Pass
FDD07	LowRange	5	HalfRB_middle	2502.5	Q16	18.79	Pass
FDD07	LowRange	5	HalfRB_high	2502.5	QPSK	19.76	Pass
FDD07	LowRange	5	HalfRB_high	2502.5	Q16	18.75	Pass
FDD07	LowRange	5	fullRB	2502.5	QPSK	19.77	Pass
FDD07	LowRange	5	fullRB	2502.5	Q16	18.82	Pass
FDD07	LowRange	10	OneRB_high	2505	QPSK	19.78	Pass
FDD07	LowRange	10	OneRB_high	2505	Q16	19.14	Pass
FDD07	LowRange	10	OneRB_low	2505	QPSK	19.81	Pass
FDD07	LowRange	10	OneRB_low	2505	Q16	20.24	Pass
FDD07	LowRange	10	OneRB_middle	2505	QPSK	19.97	Pass
FDD07	LowRange	10	OneRB_middle	2505	Q16	20.45	Pass
FDD07	LowRange	10	HalfRB_low	2505	QPSK	20.75	Pass
FDD07	LowRange	10	HalfRB_low	2505	Q16	19.69	Pass
FDD07	LowRange	10	HalfRB_middle	2505	QPSK	20.76	Pass
FDD07	LowRange	10	HalfRB_middle	2505	Q16	19.71	Pass
FDD07	LowRange	10	HalfRB_high	2505	QPSK	20.84	Pass



FDD07	LowRange	10	HalfRB_high	2505	Q16	19.78	Pass
FDD07	LowRange	10	fullRB	2505	QPSK	20.78	Pass
FDD07	LowRange	10	fullRB	2505	Q16	19.68	Pass
FDD07	LowRange	15	OneRB_high	2507.5	QPSK	20.62	Pass
FDD07	LowRange	15	OneRB_high	2507.5	Q16	19.76	Pass
FDD07	LowRange	15	OneRB_low	2507.5	QPSK	20.87	Pass
FDD07	LowRange	15	OneRB_low	2507.5	Q16	20.04	Pass
FDD07	LowRange	15	OneRB_middle	2507.5	QPSK	20.70	Pass
FDD07	LowRange	15	OneRB_middle	2507.5	Q16	19.87	Pass
FDD07	LowRange	15	HalfRB_low	2507.5	QPSK	20.05	Pass
FDD07	LowRange	15	HalfRB_low	2507.5	Q16	20.01	Pass
FDD07	LowRange	15	HalfRB_middle	2507.5	QPSK	20.03	Pass
FDD07	LowRange	15	HalfRB_middle	2507.5	Q16	20.03	Pass
FDD07	LowRange	15	HalfRB_high	2507.5	QPSK	19.77	Pass
FDD07	LowRange	15	HalfRB_high	2507.5	Q16	19.75	Pass
FDD07	LowRange	15	fullRB	2507.5	QPSK	19.79	Pass
FDD07	LowRange	15	fullRB	2507.5	Q16	18.82	Pass
FDD07	LowRange	20	OneRB_high	2510	QPSK	20.61	Pass
FDD07	LowRange	20	OneRB_high	2510	Q16	19.87	Pass
FDD07	LowRange	20	OneRB_low	2510	QPSK	20.92	Pass
FDD07	LowRange	20	OneRB_low	2510	Q16	20.26	Pass
FDD07	LowRange	20	OneRB_middle	2510	QPSK	20.73	Pass
FDD07	LowRange	20	OneRB_middle	2510	Q16	19.98	Pass
FDD07	LowRange	20	HalfRB_low	2510	QPSK	19.92	Pass
FDD07	LowRange	20	HalfRB_low	2510	Q16	18.87	Pass
FDD07	LowRange	20	HalfRB_middle	2510	QPSK	19.89	Pass
FDD07	LowRange	20	HalfRB_middle	2510	Q16	18.86	Pass
FDD07	LowRange	20	HalfRB_high	2510	QPSK	19.70	Pass
FDD07	LowRange	20	HalfRB_high	2510	Q16	18.71	Pass
FDD07	LowRange	20	fullRB	2510	QPSK	19.79	Pass
FDD07	LowRange	20	fullRB	2510	Q16	18.80	Pass
FDD07	MidRange	5	OneRB_high	2535	QPSK	20.94	Pass



FDD07	MidRange	5	OneRB_high	2535	Q16	20.22	Pass
FDD07	MidRange	5	OneRB_low	2535	QPSK	21.00	Pass
FDD07	MidRange	5	OneRB_low	2535	Q16	20.25	Pass
FDD07	MidRange	5	OneRB_middle	2535	QPSK	21.03	Pass
FDD07	MidRange	5	OneRB_middle	2535	Q16	20.31	Pass
FDD07	MidRange	5	HalfRB_low	2535	QPSK	19.98	Pass
FDD07	MidRange	5	HalfRB_low	2535	Q16	19.02	Pass
FDD07	MidRange	5	HalfRB_middle	2535	QPSK	20.00	Pass
FDD07	MidRange	5	HalfRB_middle	2535	Q16	18.96	Pass
FDD07	MidRange	5	HalfRB_high	2535	QPSK	19.92	Pass
FDD07	MidRange	5	HalfRB_high	2535	Q16	18.94	Pass
FDD07	MidRange	5	fullRB	2535	QPSK	19.96	Pass
FDD07	MidRange	5	fullRB	2535	Q16	18.97	Pass
FDD07	MidRange	10	OneRB_high	2535	QPSK	20.87	Pass
FDD07	MidRange	10	OneRB_high	2535	Q16	20.41	Pass
FDD07	MidRange	10	OneRB_low	2535	QPSK	21.03	Pass
FDD07	MidRange	10	OneRB_low	2535	Q16	20.59	Pass
FDD07	MidRange	10	OneRB_middle	2535	QPSK	20.94	Pass
FDD07	MidRange	10	OneRB_middle	2535	Q16	20.52	Pass
FDD07	MidRange	10	HalfRB_low	2535	QPSK	20.04	Pass
FDD07	MidRange	10	HalfRB_low	2535	Q16	19.09	Pass
FDD07	MidRange	10	HalfRB_middle	2535	QPSK	19.98	Pass
FDD07	MidRange	10	HalfRB_middle	2535	Q16	19.07	Pass
FDD07	MidRange	10	HalfRB_high	2535	QPSK	19.95	Pass
FDD07	MidRange	10	HalfRB_high	2535	Q16	19.02	Pass
FDD07	MidRange	10	fullRB	2535	QPSK	19.98	Pass
FDD07	MidRange	10	fullRB	2535	Q16	19.01	Pass
FDD07	MidRange	15	OneRB_high	2535	QPSK	20.85	Pass
FDD07	MidRange	15	OneRB_high	2535	Q16	20.40	Pass
FDD07	MidRange	15	OneRB_low	2535	QPSK	21.02	Pass
FDD07	MidRange	15	OneRB_low	2535	Q16	20.58	Pass
FDD07	MidRange	15	OneRB_middle	2535	QPSK	20.93	Pass



FDD07	MidRange	15	OneRB_middle	2535	Q16	20.48	Pass
FDD07	MidRange	15	HalfRB_low	2535	QPSK	20.59	Pass
FDD07	MidRange	15	HalfRB_low	2535	Q16	20.60	Pass
FDD07	MidRange	15	HalfRB_middle	2535	QPSK	20.60	Pass
FDD07	MidRange	15	HalfRB_middle	2535	Q16	20.61	Pass
FDD07	MidRange	15	HalfRB_high	2535	QPSK	20.39	Pass
FDD07	MidRange	15	HalfRB_high	2535	Q16	20.41	Pass
FDD07	MidRange	15	fullRB	2535	QPSK	19.93	Pass
FDD07	MidRange	15	fullRB	2535	Q16	18.99	Pass
FDD07	MidRange	20	OneRB_high	2535	QPSK	20.90	Pass
FDD07	MidRange	20	OneRB_high	2535	Q16	20.12	Pass
FDD07	MidRange	20	OneRB_low	2535	QPSK	21.12	Pass
FDD07	MidRange	20	OneRB_low	2535	Q16	20.41	Pass
FDD07	MidRange	20	OneRB_middle	2535	QPSK	20.98	Pass
FDD07	MidRange	20	OneRB_middle	2535	Q16	20.22	Pass
FDD07	MidRange	20	HalfRB_low	2535	QPSK	20.05	Pass
FDD07	MidRange	20	HalfRB_low	2535	Q16	19.05	Pass
FDD07	MidRange	20	HalfRB_middle	2535	QPSK	20.08	Pass
FDD07	MidRange	20	HalfRB_middle	2535	Q16	19.04	Pass
FDD07	MidRange	20	HalfRB_high	2535	QPSK	19.87	Pass
FDD07	MidRange	20	HalfRB_high	2535	Q16	18.88	Pass
FDD07	MidRange	20	fullRB	2535	QPSK	19.98	Pass
FDD07	MidRange	20	fullRB	2535	Q16	19.03	Pass
FDD07	HighRange	5	OneRB_high	2567.5	QPSK	20.90	Pass
FDD07	HighRange	5	OneRB_high	2567.5	Q16	20.19	Pass
FDD07	HighRange	5	OneRB_low	2567.5	QPSK	20.99	Pass
FDD07	HighRange	5	OneRB_low	2567.5	Q16	20.28	Pass
FDD07	HighRange	5	OneRB_middle	2567.5	QPSK	21.00	Pass
FDD07	HighRange	5	OneRB_middle	2567.5	Q16	20.29	Pass
FDD07	HighRange	5	HalfRB_low	2567.5	QPSK	19.94	Pass
FDD07	HighRange	5	HalfRB_low	2567.5	Q16	18.93	Pass
FDD07	HighRange	5	HalfRB_middle	2567.5	QPSK	19.95	Pass



FDD07	HighRange	5	HalfRB_middle	2567.5	Q16	18.95	Pass
FDD07	HighRange	5	HalfRB_high	2567.5	QPSK	19.89	Pass
FDD07	HighRange	5	HalfRB_high	2567.5	Q16	18.87	Pass
FDD07	HighRange	5	fullRB	2567.5	QPSK	19.93	Pass
FDD07	HighRange	5	fullRB	2567.5	Q16	18.88	Pass
FDD07	HighRange	10	OneRB_high	2565	QPSK	20.78	Pass
FDD07	HighRange	10	OneRB_high	2565	Q16	20.33	Pass
FDD07	HighRange	10	OneRB_low	2565	QPSK	20.95	Pass
FDD07	HighRange	10	OneRB_low	2565	Q16	20.51	Pass
FDD07	HighRange	10	OneRB_middle	2565	QPSK	20.89	Pass
FDD07	HighRange	10	OneRB_middle	2565	Q16	20.45	Pass
FDD07	HighRange	10	HalfRB_low	2565	QPSK	19.94	Pass
FDD07	HighRange	10	HalfRB_low	2565	Q16	18.97	Pass
FDD07	HighRange	10	HalfRB_middle	2565	QPSK	19.93	Pass
FDD07	HighRange	10	HalfRB_middle	2565	Q16	18.99	Pass
FDD07	HighRange	10	HalfRB_high	2565	QPSK	19.83	Pass
FDD07	HighRange	10	HalfRB_high	2565	Q16	18.90	Pass
FDD07	HighRange	10	fullRB	2565	QPSK	19.92	Pass
FDD07	HighRange	10	fullRB	2565	Q16	18.92	Pass
FDD07	HighRange	15	OneRB_high	2562.5	QPSK	20.83	Pass
FDD07	HighRange	15	OneRB_high	2562.5	Q16	20.37	Pass
FDD07	HighRange	15	OneRB_low	2562.5	QPSK	21.02	Pass
FDD07	HighRange	15	OneRB_low	2562.5	Q16	20.56	Pass
FDD07	HighRange	15	OneRB_middle	2562.5	QPSK	20.87	Pass
FDD07	HighRange	15	OneRB_middle	2562.5	Q16	20.43	Pass
FDD07	HighRange	15	HalfRB_low	2562.5	QPSK	20.58	Pass
FDD07	HighRange	15	HalfRB_low	2562.5	Q16	20.56	Pass
FDD07	HighRange	15	HalfRB_middle	2562.5	QPSK	20.59	Pass
FDD07	HighRange	15	HalfRB_middle	2562.5	Q16	20.59	Pass
FDD07	HighRange	15	HalfRB_high	2562.5	QPSK	20.36	Pass
FDD07	HighRange	15	HalfRB_high	2562.5	Q16	20.36	Pass
FDD07	HighRange	15	fullRB	2562.5	QPSK	19.92	Pass



FDD07	HighRange	15	fullRB	2562.5	Q16	19.00	Pass
FDD07	HighRange	20	OneRB_high	2560	QPSK	20.77	Pass
FDD07	HighRange	20	OneRB_high	2560	Q16	20.10	Pass
FDD07	HighRange	20	OneRB_low	2560	QPSK	21.14	Pass
FDD07	HighRange	20	OneRB_low	2560	Q16	20.40	Pass
FDD07	HighRange	20	OneRB_middle	2560	QPSK	20.94	Pass
FDD07	HighRange	20	OneRB_middle	2560	Q16	20.18	Pass
FDD07	HighRange	20	HalfRB_low	2560	QPSK	20.05	Pass
FDD07	HighRange	20	HalfRB_low	2560	Q16	19.08	Pass
FDD07	HighRange	20	HalfRB_middle	2560	QPSK	20.08	Pass
FDD07	HighRange	20	HalfRB_middle	2560	Q16	19.05	Pass
FDD07	HighRange	20	HalfRB_high	2560	QPSK	19.82	Pass
FDD07	HighRange	20	HalfRB_high	2560	Q16	18.83	Pass
FDD07	HighRange	20	fullRB	2560	QPSK	19.96	Pass
FDD07	HighRange	20	fullRB	2560	Q16	18.97	Pass
FDD12	LowRange	1.4	OneRB_high	699.7	QPSK	22.03	Pass
FDD12	LowRange	1.4	OneRB_high	699.7	Q16	21.11	Pass
FDD12	LowRange	1.4	OneRB_low	699.7	QPSK	22.05	Pass
FDD12	LowRange	1.4	OneRB_low	699.7	Q16	21.14	Pass
FDD12	LowRange	1.4	OneRB_middle	699.7	QPSK	22.14	Pass
FDD12	LowRange	1.4	OneRB_middle	699.7	Q16	21.19	Pass
FDD12	LowRange	1.4	HalfRB_low	699.7	QPSK	21.16	Pass
FDD12	LowRange	1.4	HalfRB_low	699.7	Q16	21.16	Pass
FDD12	LowRange	1.4	HalfRB_middle	699.7	QPSK	21.14	Pass
FDD12	LowRange	1.4	HalfRB_middle	699.7	Q16	21.15	Pass
FDD12	LowRange	1.4	HalfRB_high	699.7	QPSK	21.14	Pass
FDD12	LowRange	1.4	HalfRB_high	699.7	Q16	21.14	Pass
FDD12	LowRange	1.4	fullRB	699.7	QPSK	21.25	Pass
FDD12	LowRange	1.4	fullRB	699.7	Q16	20.17	Pass
FDD12	LowRange	3	OneRB_high	700.5	QPSK	22.04	Pass
FDD12	LowRange	3	OneRB_high	700.5	Q16	21.35	Pass
FDD12	LowRange	3	OneRB_low	700.5	QPSK	21.99	Pass



FDD12	LowRange	3	OneRB_low	700.5	Q16	21.25	Pass
FDD12	LowRange	3	OneRB_middle	700.5	QPSK	22.27	Pass
FDD12	LowRange	3	OneRB_middle	700.5	Q16	21.50	Pass
FDD12	LowRange	3	HalfRB_low	700.5	QPSK	21.16	Pass
FDD12	LowRange	3	HalfRB_low	700.5	Q16	20.12	Pass
FDD12	LowRange	3	HalfRB_middle	700.5	QPSK	21.19	Pass
FDD12	LowRange	3	HalfRB_middle	700.5	Q16	20.14	Pass
FDD12	LowRange	3	HalfRB_high	700.5	QPSK	21.05	Pass
FDD12	LowRange	3	HalfRB_high	700.5	Q16	20.04	Pass
FDD12	LowRange	3	fullRB	700.5	QPSK	21.14	Pass
FDD12	LowRange	3	fullRB	700.5	Q16	20.11	Pass
FDD12	LowRange	5	OneRB_high	701.5	QPSK	22.49	Pass
FDD12	LowRange	5	OneRB_high	701.5	Q16	21.37	Pass
FDD12	LowRange	5	OneRB_low	701.5	QPSK	22.53	Pass
FDD12	LowRange	5	OneRB_low	701.5	Q16	21.51	Pass
FDD12	LowRange	5	OneRB_middle	701.5	QPSK	22.65	Pass
FDD12	LowRange	5	OneRB_middle	701.5	Q16	21.57	Pass
FDD12	LowRange	5	HalfRB_low	701.5	QPSK	21.61	Pass
FDD12	LowRange	5	HalfRB_low	701.5	Q16	20.70	Pass
FDD12	LowRange	5	HalfRB_middle	701.5	QPSK	21.62	Pass
FDD12	LowRange	5	HalfRB_middle	701.5	Q16	20.71	Pass
FDD12	LowRange	5	HalfRB_high	701.5	QPSK	21.58	Pass
FDD12	LowRange	5	HalfRB_high	701.5	Q16	20.63	Pass
FDD12	LowRange	5	fullRB	701.5	QPSK	21.61	Pass
FDD12	LowRange	5	fullRB	701.5	Q16	20.68	Pass
FDD12	LowRange	10	OneRB_high	704	QPSK	22.52	Pass
FDD12	LowRange	10	OneRB_high	704	Q16	21.80	Pass
FDD12	LowRange	10	OneRB_low	704	QPSK	22.51	Pass
FDD12	LowRange	10	OneRB_low	704	Q16	21.77	Pass
FDD12	LowRange	10	OneRB_middle	704	QPSK	22.83	Pass
FDD12	LowRange	10	OneRB_middle	704	Q16	22.13	Pass
FDD12	LowRange	10	HalfRB_low	704	QPSK	21.84	Pass



FDD12	LowRange	10	HalfRB_low	704	Q16	20.87	Pass
FDD12	LowRange	10	HalfRB_middle	704	QPSK	21.85	Pass
FDD12	LowRange	10	HalfRB_middle	704	Q16	20.86	Pass
FDD12	LowRange	10	HalfRB_high	704	QPSK	21.84	Pass
FDD12	LowRange	10	HalfRB_high	704	Q16	20.87	Pass
FDD12	LowRange	10	fullRB	704	QPSK	21.88	Pass
FDD12	LowRange	10	fullRB	704	Q16	20.91	Pass
FDD12	MidRange	1.4	OneRB_high	707.5	QPSK	22.44	Pass
FDD12	MidRange	1.4	OneRB_high	707.5	Q16	21.51	Pass
FDD12	MidRange	1.4	OneRB_low	707.5	QPSK	22.44	Pass
FDD12	MidRange	1.4	OneRB_low	707.5	Q16	21.51	Pass
FDD12	MidRange	1.4	OneRB_middle	707.5	QPSK	22.59	Pass
FDD12	MidRange	1.4	OneRB_middle	707.5	Q16	21.68	Pass
FDD12	MidRange	1.4	HalfRB_low	707.5	QPSK	22.54	Pass
FDD12	MidRange	1.4	HalfRB_low	707.5	Q16	21.67	Pass
FDD12	MidRange	1.4	HalfRB_middle	707.5	QPSK	22.51	Pass
FDD12	MidRange	1.4	HalfRB_middle	707.5	Q16	21.65	Pass
FDD12	MidRange	1.4	HalfRB_high	707.5	QPSK	22.54	Pass
FDD12	MidRange	1.4	HalfRB_high	707.5	Q16	21.65	Pass
FDD12	MidRange	1.4	fullRB	707.5	QPSK	21.53	Pass
FDD12	MidRange	1.4	fullRB	707.5	Q16	20.43	Pass
FDD12	MidRange	3	OneRB_high	707.5	QPSK	21.97	Pass
FDD12	MidRange	3	OneRB_high	707.5	Q16	21.02	Pass
FDD12	MidRange	3	OneRB_low	707.5	QPSK	22.09	Pass
FDD12	MidRange	3	OneRB_low	707.5	Q16	21.13	Pass
FDD12	MidRange	3	OneRB_middle	707.5	QPSK	22.03	Pass
FDD12	MidRange	3	OneRB_middle	707.5	Q16	21.09	Pass
FDD12	MidRange	3	HalfRB_low	707.5	QPSK	21.11	Pass
FDD12	MidRange	3	HalfRB_low	707.5	Q16	20.19	Pass
FDD12	MidRange	3	HalfRB_middle	707.5	QPSK	21.10	Pass
FDD12	MidRange	3	HalfRB_middle	707.5	Q16	20.15	Pass
FDD12	MidRange	3	HalfRB_high	707.5	QPSK	21.11	Pass



FDD12	MidRange	3	HalfRB_high	707.5	Q16	20.15	Pass
FDD12	MidRange	3	fullRB	707.5	QPSK	21.11	Pass
FDD12	MidRange	3	fullRB	707.5	Q16	20.17	Pass
FDD12	MidRange	5	OneRB_high	707.5	QPSK	22.07	Pass
FDD12	MidRange	5	OneRB_high	707.5	Q16	21.01	Pass
FDD12	MidRange	5	OneRB_low	707.5	QPSK	22.19	Pass
FDD12	MidRange	5	OneRB_low	707.5	Q16	21.11	Pass
FDD12	MidRange	5	OneRB_middle	707.5	QPSK	22.21	Pass
FDD12	MidRange	5	OneRB_middle	707.5	Q16	21.11	Pass
FDD12	MidRange	5	HalfRB_low	707.5	QPSK	21.13	Pass
FDD12	MidRange	5	HalfRB_low	707.5	Q16	20.16	Pass
FDD12	MidRange	5	HalfRB_middle	707.5	QPSK	21.12	Pass
FDD12	MidRange	5	HalfRB_middle	707.5	Q16	20.16	Pass
FDD12	MidRange	5	HalfRB_high	707.5	QPSK	21.11	Pass
FDD12	MidRange	5	HalfRB_high	707.5	Q16	20.12	Pass
FDD12	MidRange	5	fullRB	707.5	QPSK	21.11	Pass
FDD12	MidRange	5	fullRB	707.5	Q16	20.20	Pass
FDD12	MidRange	10	OneRB_high	707.5	QPSK	22.04	Pass
FDD12	MidRange	10	OneRB_high	707.5	Q16	21.63	Pass
FDD12	MidRange	10	OneRB_low	707.5	QPSK	22.12	Pass
FDD12	MidRange	10	OneRB_low	707.5	Q16	21.65	Pass
FDD12	MidRange	10	OneRB_middle	707.5	QPSK	22.08	Pass
FDD12	MidRange	10	OneRB_middle	707.5	Q16	21.73	Pass
FDD12	MidRange	10	HalfRB_low	707.5	QPSK	21.21	Pass
FDD12	MidRange	10	HalfRB_low	707.5	Q16	20.32	Pass
FDD12	MidRange	10	HalfRB_middle	707.5	QPSK	21.23	Pass
FDD12	MidRange	10	HalfRB_middle	707.5	Q16	20.27	Pass
FDD12	MidRange	10	HalfRB_high	707.5	QPSK	21.09	Pass
FDD12	MidRange	10	HalfRB_high	707.5	Q16	20.19	Pass
FDD12	MidRange	10	fullRB	707.5	QPSK	21.16	Pass
FDD12	MidRange	10	fullRB	707.5	Q16	20.16	Pass
FDD12	HighRange	1.4	OneRB_high	715.3	QPSK	22.05	Pass



FDD12	HighRange	1.4	OneRB_high	715.3	Q16	21.17	Pass
FDD12	HighRange	1.4	OneRB_low	715.3	QPSK	22.40	Pass
FDD12	HighRange	1.4	OneRB_low	715.3	Q16	21.33	Pass
FDD12	HighRange	1.4	OneRB_middle	715.3	QPSK	22.57	Pass
FDD12	HighRange	1.4	OneRB_middle	715.3	Q16	21.49	Pass
FDD12	HighRange	1.4	HalfRB_low	715.3	QPSK	21.54	Pass
FDD12	HighRange	1.4	HalfRB_low	715.3	Q16	20.52	Pass
FDD12	HighRange	1.4	HalfRB_middle	715.3	QPSK	21.53	Pass
FDD12	HighRange	1.4	HalfRB_middle	715.3	Q16	20.53	Pass
FDD12	HighRange	1.4	HalfRB_high	715.3	QPSK	21.52	Pass
FDD12	HighRange	1.4	HalfRB_high	715.3	Q16	20.51	Pass
FDD12	HighRange	1.4	fullRB	715.3	QPSK	21.57	Pass
FDD12	HighRange	1.4	fullRB	715.3	Q16	20.60	Pass
FDD12	HighRange	3	OneRB_high	714.5	QPSK	22.12	Pass
FDD12	HighRange	3	OneRB_high	714.5	Q16	21.09	Pass
FDD12	HighRange	3	OneRB_low	714.5	QPSK	22.14	Pass
FDD12	HighRange	3	OneRB_low	714.5	Q16	21.19	Pass
FDD12	HighRange	3	OneRB_middle	714.5	QPSK	22.12	Pass
FDD12	HighRange	3	OneRB_middle	714.5	Q16	21.14	Pass
FDD12	HighRange	3	HalfRB_low	714.5	QPSK	21.18	Pass
FDD12	HighRange	3	HalfRB_low	714.5	Q16	20.27	Pass
FDD12	HighRange	3	HalfRB_middle	714.5	QPSK	21.15	Pass
FDD12	HighRange	3	HalfRB_middle	714.5	Q16	20.22	Pass
FDD12	HighRange	3	HalfRB_high	714.5	QPSK	21.14	Pass
FDD12	HighRange	3	HalfRB_high	714.5	Q16	20.22	Pass
FDD12	HighRange	3	fullRB	714.5	QPSK	21.13	Pass
FDD12	HighRange	3	fullRB	714.5	Q16	20.21	Pass
FDD12	HighRange	5	OneRB_high	713.5	QPSK	22.05	Pass
FDD12	HighRange	5	OneRB_high	713.5	Q16	21.06	Pass
FDD12	HighRange	5	OneRB_low	713.5	QPSK	22.13	Pass
FDD12	HighRange	5	OneRB_low	713.5	Q16	21.10	Pass
FDD12	HighRange	5	OneRB_middle	713.5	QPSK	22.26	Pass



FDD12	HighRange	5	OneRB_middle	713.5	Q16	21.18	Pass
FDD12	HighRange	5	HalfRB_low	713.5	QPSK	21.20	Pass
FDD12	HighRange	5	HalfRB_low	713.5	Q16	20.22	Pass
FDD12	HighRange	5	HalfRB_middle	713.5	QPSK	21.21	Pass
FDD12	HighRange	5	HalfRB_middle	713.5	Q16	20.22	Pass
FDD12	HighRange	5	HalfRB_high	713.5	QPSK	21.16	Pass
FDD12	HighRange	5	HalfRB_high	713.5	Q16	20.18	Pass
FDD12	HighRange	5	fullRB	713.5	QPSK	21.19	Pass
FDD12	HighRange	5	fullRB	713.5	Q16	20.23	Pass
FDD12	HighRange	10	OneRB_high	711	QPSK	22.08	Pass
FDD12	HighRange	10	OneRB_high	711	Q16	21.66	Pass
FDD12	HighRange	10	OneRB_low	711	QPSK	22.20	Pass
FDD12	HighRange	10	OneRB_low	711	Q16	21.79	Pass
FDD12	HighRange	10	OneRB_middle	711	QPSK	22.09	Pass
FDD12	HighRange	10	OneRB_middle	711	Q16	21.73	Pass
FDD12	HighRange	10	HalfRB_low	711	QPSK	21.17	Pass
FDD12	HighRange	10	HalfRB_low	711	Q16	20.27	Pass
FDD12	HighRange	10	HalfRB_middle	711	QPSK	21.18	Pass
FDD12	HighRange	10	HalfRB_middle	711	Q16	20.27	Pass
FDD12	HighRange	10	HalfRB_high	711	QPSK	21.20	Pass
FDD12	HighRange	10	HalfRB_high	711	Q16	20.22	Pass
FDD12	HighRange	10	fullRB	711	QPSK	21.16	Pass
FDD12	HighRange	10	fullRB	711	Q16	20.14	Pass
FDD66	LowRange	1.4	OneRB_high	1710.7	QPSK	21.36	Pass
FDD66	LowRange	1.4	OneRB_high	1710.7	Q16	20.26	Pass
FDD66	LowRange	1.4	OneRB_low	1710.7	QPSK	21.49	Pass
FDD66	LowRange	1.4	OneRB_low	1710.7	Q16	20.35	Pass
FDD66	LowRange	1.4	OneRB_middle	1710.7	QPSK	21.58	Pass
FDD66	LowRange	1.4	OneRB_middle	1710.7	Q16	20.43	Pass
FDD66	LowRange	1.4	HalfRB_low	1710.7	QPSK	20.45	Pass
FDD66	LowRange	1.4	HalfRB_low	1710.7	Q16	19.50	Pass
FDD66	LowRange	1.4	HalfRB_middle	1710.7	QPSK	20.50	Pass



FDD66	LowRange	1.4	HalfRB_middle	1710.7	Q16	19.47	Pass
FDD66	LowRange	1.4	HalfRB_high	1710.7	QPSK	20.49	Pass
FDD66	LowRange	1.4	HalfRB_high	1710.7	Q16	21.45	Pass
FDD66	LowRange	1.4	fullRB	1710.7	QPSK	20.57	Pass
FDD66	LowRange	1.4	fullRB	1710.7	Q16	20.47	Pass
FDD66	LowRange	3	OneRB_high	1711.5	QPSK	21.26	Pass
FDD66	LowRange	3	OneRB_high	1711.5	Q16	20.30	Pass
FDD66	LowRange	3	OneRB_low	1711.5	QPSK	21.21	Pass
FDD66	LowRange	3	OneRB_low	1711.5	Q16	20.29	Pass
FDD66	LowRange	3	OneRB_middle	1711.5	QPSK	21.29	Pass
FDD66	LowRange	3	OneRB_middle	1711.5	Q16	20.33	Pass
FDD66	LowRange	3	HalfRB_low	1711.5	QPSK	21.26	Pass
FDD66	LowRange	3	HalfRB_low	1711.5	Q16	20.18	Pass
FDD66	LowRange	3	HalfRB_middle	1711.5	QPSK	21.13	Pass
FDD66	LowRange	3	HalfRB_middle	1711.5	Q16	20.23	Pass
FDD66	LowRange	3	HalfRB_high	1711.5	QPSK	21.16	Pass
FDD66	LowRange	3	HalfRB_high	1711.5	Q16	20.24	Pass
FDD66	LowRange	3	fullRB	1711.5	QPSK	20.15	Pass
FDD66	LowRange	3	fullRB	1711.5	Q16	19.07	Pass
FDD66	LowRange	5	OneRB_high	1712.5	QPSK	21.19	Pass
FDD66	LowRange	5	OneRB_high	1712.5	Q16	20.76	Pass
FDD66	LowRange	5	OneRB_low	1712.5	QPSK	21.30	Pass
FDD66	LowRange	5	OneRB_low	1712.5	Q16	20.86	Pass
FDD66	LowRange	5	OneRB_middle	1712.5	QPSK	21.23	Pass
FDD66	LowRange	5	OneRB_middle	1712.5	Q16	20.83	Pass
FDD66	LowRange	5	HalfRB_low	1712.5	QPSK	20.26	Pass
FDD66	LowRange	5	HalfRB_low	1712.5	Q16	19.41	Pass
FDD66	LowRange	5	HalfRB_middle	1712.5	QPSK	20.28	Pass
FDD66	LowRange	5	HalfRB_middle	1712.5	Q16	19.43	Pass
FDD66	LowRange	5	HalfRB_high	1712.5	QPSK	20.22	Pass
FDD66	LowRange	5	HalfRB_high	1712.5	Q16	19.39	Pass
FDD66	LowRange	5	fullRB	1712.5	QPSK	20.24	Pass



FDD66	LowRange	5	fullRB	1712.5	Q16	19.31	Pass
FDD66	LowRange	10	OneRB_high	1715	QPSK	21.22	Pass
FDD66	LowRange	10	OneRB_high	1715	Q16	20.21	Pass
FDD66	LowRange	10	OneRB_low	1715	QPSK	21.39	Pass
FDD66	LowRange	10	OneRB_low	1715	Q16	20.31	Pass
FDD66	LowRange	10	OneRB_middle	1715	QPSK	21.37	Pass
FDD66	LowRange	10	OneRB_middle	1715	Q16	20.28	Pass
FDD66	LowRange	10	HalfRB_low	1715	QPSK	20.28	Pass
FDD66	LowRange	10	HalfRB_low	1715	Q16	19.23	Pass
FDD66	LowRange	10	HalfRB_middle	1715	QPSK	20.24	Pass
FDD66	LowRange	10	HalfRB_middle	1715	Q16	19.25	Pass
FDD66	LowRange	10	HalfRB_high	1715	QPSK	20.22	Pass
FDD66	LowRange	10	HalfRB_high	1715	Q16	19.19	Pass
FDD66	LowRange	10	fullRB	1715	QPSK	20.24	Pass
FDD66	LowRange	10	fullRB	1715	Q16	19.25	Pass
FDD66	LowRange	15	OneRB_high	1717.5	QPSK	21.16	Pass
FDD66	LowRange	15	OneRB_high	1717.5	Q16	20.76	Pass
FDD66	LowRange	15	OneRB_low	1717.5	QPSK	21.37	Pass
FDD66	LowRange	15	OneRB_low	1717.5	Q16	20.96	Pass
FDD66	LowRange	15	OneRB_middle	1717.5	QPSK	21.23	Pass
FDD66	LowRange	15	OneRB_middle	1717.5	Q16	20.83	Pass
FDD66	LowRange	15	HalfRB_low	1717.5	QPSK	20.36	Pass
FDD66	LowRange	15	HalfRB_low	1717.5	Q16	19.39	Pass
FDD66	LowRange	15	HalfRB_middle	1717.5	QPSK	20.31	Pass
FDD66	LowRange	15	HalfRB_middle	1717.5	Q16	19.40	Pass
FDD66	LowRange	15	HalfRB_high	1717.5	QPSK	20.23	Pass
FDD66	LowRange	15	HalfRB_high	1717.5	Q16	19.30	Pass
FDD66	LowRange	15	fullRB	1717.5	QPSK	20.24	Pass
FDD66	LowRange	15	fullRB	1717.5	Q16	19.27	Pass
FDD66	LowRange	20	OneRB_high	1720	QPSK	21.20	Pass
FDD66	LowRange	20	OneRB_high	1720	Q16	20.68	Pass
FDD66	LowRange	20	OneRB_low	1720	QPSK	21.45	Pass



FDD66	LowRange	20	OneRB_low	1720	Q16	21.01	Pass
FDD66	LowRange	20	OneRB_middle	1720	QPSK	21.23	Pass
FDD66	LowRange	20	OneRB_middle	1720	Q16	20.88	Pass
FDD66	LowRange	20	HalfRB_low	1720	QPSK	20.96	Pass
FDD66	LowRange	20	HalfRB_low	1720	Q16	21.01	Pass
FDD66	LowRange	20	HalfRB_middle	1720	QPSK	21.01	Pass
FDD66	LowRange	20	HalfRB_middle	1720	Q16	20.98	Pass
FDD66	LowRange	20	HalfRB_high	1720	QPSK	20.80	Pass
FDD66	LowRange	20	HalfRB_high	1720	Q16	20.78	Pass
FDD66	LowRange	20	fullRB	1720	QPSK	20.34	Pass
FDD66	LowRange	20	fullRB	1720	Q16	19.33	Pass
FDD66	MidRange	1.4	OneRB_high	1745	QPSK	21.55	Pass
FDD66	MidRange	1.4	OneRB_high	1745	Q16	20.51	Pass
FDD66	MidRange	1.4	OneRB_low	1745	QPSK	21.47	Pass
FDD66	MidRange	1.4	OneRB_low	1745	Q16	20.52	Pass
FDD66	MidRange	1.4	OneRB_middle	1745	QPSK	21.54	Pass
FDD66	MidRange	1.4	OneRB_middle	1745	Q16	20.57	Pass
FDD66	MidRange	1.4	HalfRB_low	1745	QPSK	21.47	Pass
FDD66	MidRange	1.4	HalfRB_low	1745	Q16	20.61	Pass
FDD66	MidRange	1.4	HalfRB_middle	1745	QPSK	21.45	Pass
FDD66	MidRange	1.4	HalfRB_middle	1745	Q16	20.57	Pass
FDD66	MidRange	1.4	HalfRB_high	1745	QPSK	21.51	Pass
FDD66	MidRange	1.4	HalfRB_high	1745	Q16	20.60	Pass
FDD66	MidRange	1.4	fullRB	1745	QPSK	20.48	Pass
FDD66	MidRange	1.4	fullRB	1745	Q16	19.43	Pass
FDD66	MidRange	3	OneRB_high	1745	QPSK	21.52	Pass
FDD66	MidRange	3	OneRB_high	1745	Q16	21.08	Pass
FDD66	MidRange	3	OneRB_low	1745	QPSK	21.62	Pass
FDD66	MidRange	3	OneRB_low	1745	Q16	21.25	Pass
FDD66	MidRange	3	OneRB_middle	1745	QPSK	21.56	Pass
FDD66	MidRange	3	OneRB_middle	1745	Q16	21.14	Pass
FDD66	MidRange	3	HalfRB_low	1745	QPSK	20.59	Pass



FDD66	MidRange	3	HalfRB_low	1745	Q16	19.78	Pass
FDD66	MidRange	3	HalfRB_middle	1745	QPSK	20.58	Pass
FDD66	MidRange	3	HalfRB_middle	1745	Q16	19.77	Pass
FDD66	MidRange	3	HalfRB_high	1745	QPSK	20.56	Pass
FDD66	MidRange	3	HalfRB_high	1745	Q16	19.75	Pass
FDD66	MidRange	3	fullRB	1745	QPSK	20.55	Pass
FDD66	MidRange	3	fullRB	1745	Q16	19.63	Pass
FDD66	MidRange	5	OneRB_high	1745	QPSK	21.64	Pass
FDD66	MidRange	5	OneRB_high	1745	Q16	20.50	Pass
FDD66	MidRange	5	OneRB_low	1745	QPSK	21.73	Pass
FDD66	MidRange	5	OneRB_low	1745	Q16	20.59	Pass
FDD66	MidRange	5	OneRB_middle	1745	QPSK	21.72	Pass
FDD66	MidRange	5	OneRB_middle	1745	Q16	20.67	Pass
FDD66	MidRange	5	HalfRB_low	1745	QPSK	20.62	Pass
FDD66	MidRange	5	HalfRB_low	1745	Q16	19.60	Pass
FDD66	MidRange	5	HalfRB_middle	1745	QPSK	20.60	Pass
FDD66	MidRange	5	HalfRB_middle	1745	Q16	19.63	Pass
FDD66	MidRange	5	HalfRB_high	1745	QPSK	20.59	Pass
FDD66	MidRange	5	HalfRB_high	1745	Q16	19.57	Pass
FDD66	MidRange	5	fullRB	1745	QPSK	20.58	Pass
FDD66	MidRange	5	fullRB	1745	Q16	19.63	Pass
FDD66	MidRange	10	OneRB_high	1745	QPSK	21.53	Pass
FDD66	MidRange	10	OneRB_high	1745	Q16	21.04	Pass
FDD66	MidRange	10	OneRB_low	1745	QPSK	21.72	Pass
FDD66	MidRange	10	OneRB_low	1745	Q16	21.34	Pass
FDD66	MidRange	10	OneRB_middle	1745	QPSK	21.60	Pass
FDD66	MidRange	10	OneRB_middle	1745	Q16	21.23	Pass
FDD66	MidRange	10	HalfRB_low	1745	QPSK	20.69	Pass
FDD66	MidRange	10	HalfRB_low	1745	Q16	19.74	Pass
FDD66	MidRange	10	HalfRB_middle	1745	QPSK	20.67	Pass
FDD66	MidRange	10	HalfRB_middle	1745	Q16	19.75	Pass
FDD66	MidRange	10	HalfRB_high	1745	QPSK	20.55	Pass



FDD66	MidRange	10	HalfRB_high	1745	Q16	19.61	Pass
FDD66	MidRange	10	fullRB	1745	QPSK	20.60	Pass
FDD66	MidRange	10	fullRB	1745	Q16	19.64	Pass
FDD66	MidRange	15	OneRB_high	1745	QPSK	21.56	Pass
FDD66	MidRange	15	OneRB_high	1745	Q16	21.04	Pass
FDD66	MidRange	15	OneRB_low	1745	QPSK	21.71	Pass
FDD66	MidRange	15	OneRB_low	1745	Q16	21.25	Pass
FDD66	MidRange	15	OneRB_middle	1745	QPSK	21.53	Pass
FDD66	MidRange	15	OneRB_middle	1745	Q16	21.03	Pass
FDD66	MidRange	15	HalfRB_low	1745	QPSK	21.29	Pass
FDD66	MidRange	15	HalfRB_low	1745	Q16	21.29	Pass
FDD66	MidRange	15	HalfRB_middle	1745	QPSK	21.32	Pass
FDD66	MidRange	15	HalfRB_middle	1745	Q16	21.28	Pass
FDD66	MidRange	15	HalfRB_high	1745	QPSK	21.14	Pass
FDD66	MidRange	15	HalfRB_high	1745	Q16	21.03	Pass
FDD66	MidRange	15	fullRB	1745	QPSK	20.53	Pass
FDD66	MidRange	15	fullRB	1745	Q16	19.59	Pass
FDD66	MidRange	20	OneRB_high	1745	QPSK	21.59	Pass
FDD66	MidRange	20	OneRB_high	1745	Q16	20.65	Pass
FDD66	MidRange	20	OneRB_low	1745	QPSK	21.79	Pass
FDD66	MidRange	20	OneRB_low	1745	Q16	21.06	Pass
FDD66	MidRange	20	OneRB_middle	1745	QPSK	21.52	Pass
FDD66	MidRange	20	OneRB_middle	1745	Q16	20.82	Pass
FDD66	MidRange	20	HalfRB_low	1745	QPSK	20.69	Pass
FDD66	MidRange	20	HalfRB_low	1745	Q16	19.65	Pass
FDD66	MidRange	20	HalfRB_middle	1745	QPSK	20.64	Pass
FDD66	MidRange	20	HalfRB_middle	1745	Q16	19.68	Pass
FDD66	MidRange	20	HalfRB_high	1745	QPSK	20.46	Pass
FDD66	MidRange	20	HalfRB_high	1745	Q16	19.45	Pass
FDD66	MidRange	20	fullRB	1745	QPSK	20.57	Pass
FDD66	MidRange	20	fullRB	1745	Q16	19.62	Pass
FDD66	HighRange	1.4	OneRB_high	1779.3	QPSK	20.85	Pass



FDD66	HighRange	1.4	OneRB_high	1779.3	Q16	20.13	Pass
FDD66	HighRange	1.4	OneRB_low	1779.3	QPSK	21.14	Pass
FDD66	HighRange	1.4	OneRB_low	1779.3	Q16	20.37	Pass
FDD66	HighRange	1.4	OneRB_middle	1779.3	QPSK	20.81	Pass
FDD66	HighRange	1.4	OneRB_middle	1779.3	Q16	20.06	Pass
FDD66	HighRange	1.4	HalfRB_low	1779.3	QPSK	19.94	Pass
FDD66	HighRange	1.4	HalfRB_low	1779.3	Q16	18.96	Pass
FDD66	HighRange	1.4	HalfRB_middle	1779.3	QPSK	19.95	Pass
FDD66	HighRange	1.4	HalfRB_middle	1779.3	Q16	18.95	Pass
FDD66	HighRange	1.4	HalfRB_high	1779.3	QPSK	19.85	Pass
FDD66	HighRange	1.4	HalfRB_high	1779.3	Q16	18.79	Pass
FDD66	HighRange	1.4	fullRB	1779.3	QPSK	19.96	Pass
FDD66	HighRange	1.4	fullRB	1779.3	Q16	19.00	Pass
FDD66	HighRange	3	OneRB_high	1778.5	QPSK	21.24	Pass
FDD66	HighRange	3	OneRB_high	1778.5	Q16	20.49	Pass
FDD66	HighRange	3	OneRB_low	1778.5	QPSK	21.57	Pass
FDD66	HighRange	3	OneRB_low	1778.5	Q16	20.84	Pass
FDD66	HighRange	3	OneRB_middle	1778.5	QPSK	21.33	Pass
FDD66	HighRange	3	OneRB_middle	1778.5	Q16	20.59	Pass
FDD66	HighRange	3	HalfRB_low	1778.5	QPSK	20.48	Pass
FDD66	HighRange	3	HalfRB_low	1778.5	Q16	19.45	Pass
FDD66	HighRange	3	HalfRB_middle	1778.5	QPSK	20.45	Pass
FDD66	HighRange	3	HalfRB_middle	1778.5	Q16	19.47	Pass
FDD66	HighRange	3	HalfRB_high	1778.5	QPSK	20.23	Pass
FDD66	HighRange	3	HalfRB_high	1778.5	Q16	19.21	Pass
FDD66	HighRange	3	fullRB	1778.5	QPSK	20.36	Pass
FDD66	HighRange	3	fullRB	1778.5	Q16	19.36	Pass
FDD66	HighRange	5	OneRB_high	1777.5	QPSK	21.46	Pass
FDD66	HighRange	5	OneRB_high	1777.5	Q16	20.30	Pass
FDD66	HighRange	5	OneRB_low	1777.5	QPSK	21.44	Pass
FDD66	HighRange	5	OneRB_low	1777.5	Q16	20.26	Pass
FDD66	HighRange	5	OneRB_middle	1777.5	QPSK	21.58	Pass



FDD66	HighRange	5	OneRB_middle	1777.5	Q16	20.38	Pass
FDD66	HighRange	5	HalfRB_low	1777.5	QPSK	20.48	Pass
FDD66	HighRange	5	HalfRB_low	1777.5	Q16	19.55	Pass
FDD66	HighRange	5	HalfRB_middle	1777.5	QPSK	20.50	Pass
FDD66	HighRange	5	HalfRB_middle	1777.5	Q16	19.53	Pass
FDD66	HighRange	5	HalfRB_high	1777.5	QPSK	20.51	Pass
FDD66	HighRange	5	HalfRB_high	1777.5	Q16	19.51	Pass
FDD66	HighRange	5	fullRB	1777.5	QPSK	20.50	Pass
FDD66	HighRange	5	fullRB	1777.5	Q16	19.61	Pass
FDD66	HighRange	10	OneRB_high	1775	QPSK	21.78	Pass
FDD66	HighRange	10	OneRB_high	1775	Q16	20.67	Pass
FDD66	HighRange	10	OneRB_low	1775	QPSK	21.70	Pass
FDD66	HighRange	10	OneRB_low	1775	Q16	20.64	Pass
FDD66	HighRange	10	OneRB_middle	1775	QPSK	21.93	Pass
FDD66	HighRange	10	OneRB_middle	1775	Q16	20.80	Pass
FDD66	HighRange	10	HalfRB_low	1775	QPSK	20.81	Pass
FDD66	HighRange	10	HalfRB_low	1775	Q16	19.86	Pass
FDD66	HighRange	10	HalfRB_middle	1775	QPSK	20.79	Pass
FDD66	HighRange	10	HalfRB_middle	1775	Q16	19.88	Pass
FDD66	HighRange	10	HalfRB_high	1775	QPSK	20.69	Pass
FDD66	HighRange	10	HalfRB_high	1775	Q16	19.73	Pass
FDD66	HighRange	10	fullRB	1775	QPSK	20.75	Pass
FDD66	HighRange	10	fullRB	1775	Q16	19.79	Pass
FDD66	HighRange	15	OneRB_high	1772.5	QPSK	21.76	Pass
FDD66	HighRange	15	OneRB_high	1772.5	Q16	21.23	Pass
FDD66	HighRange	15	OneRB_low	1772.5	QPSK	21.72	Pass
FDD66	HighRange	15	OneRB_low	1772.5	Q16	21.03	Pass
FDD66	HighRange	15	OneRB_middle	1772.5	QPSK	21.75	Pass
FDD66	HighRange	15	OneRB_middle	1772.5	Q16	21.03	Pass
FDD66	HighRange	15	HalfRB_low	1772.5	QPSK	21.09	Pass
FDD66	HighRange	15	HalfRB_low	1772.5	Q16	21.06	Pass
FDD66	HighRange	15	HalfRB_middle	1772.5	QPSK	21.07	Pass



FDD66	HighRange	15	HalfRB_middle	1772.5	Q16	21.08	Pass
FDD66	HighRange	15	HalfRB_high	1772.5	QPSK	20.92	Pass
FDD66	HighRange	15	HalfRB_high	1772.5	Q16	20.97	Pass
FDD66	HighRange	15	fullRB	1772.5	QPSK	20.76	Pass
FDD66	HighRange	15	fullRB	1772.5	Q16	19.71	Pass
FDD66	HighRange	20	OneRB_high	1770	QPSK	21.67	Pass
FDD66	HighRange	20	OneRB_high	1770	Q16	21.22	Pass
FDD66	HighRange	20	OneRB_low	1770	QPSK	21.62	Pass
FDD66	HighRange	20	OneRB_low	1770	Q16	21.18	Pass
FDD66	HighRange	20	OneRB_middle	1770	QPSK	21.81	Pass
FDD66	HighRange	20	OneRB_middle	1770	Q16	21.30	Pass
FDD66	HighRange	20	HalfRB_low	1770	QPSK	20.76	Pass
FDD66	HighRange	20	HalfRB_low	1770	Q16	19.76	Pass
FDD66	HighRange	20	HalfRB_middle	1770	QPSK	20.78	Pass
FDD66	HighRange	20	HalfRB_middle	1770	Q16	19.76	Pass
FDD66	HighRange	20	HalfRB_high	1770	QPSK	20.56	Pass
FDD66	HighRange	20	HalfRB_high	1770	Q16	19.50	Pass
FDD66	HighRange	20	fullRB	1770	QPSK	20.66	Pass
FDD66	HighRange	20	fullRB	1770	Q16	19.64	Pass




Peak To Average Ratio

Test Result and Data


PeakToAveragePowerRatio NormalTC_NormalVol

Band	Range	BandWidth	RbMode	Modulation	PAPR (dBm)	Limit (dBm)	Result
FDD02	LowRange	20	OneRB_high	Q16	5.71	13.00	Pass
FDD02	LowRange	20	fullRB	Q16	6.15	13.00	Pass
FDD02	MidRange	20	OneRB_high	Q16	5.65	13.00	Pass
FDD02	MidRange	20	fullRB	Q16	6.29	13.00	Pass
FDD02	HighRange	20	OneRB_high	Q16	5.75	13.00	Pass
FDD02	HighRange	20	fullRB	Q16	6.31	13.00	Pass

FDD02_LowRange_20MHz_1860_OneRB_high_Q16

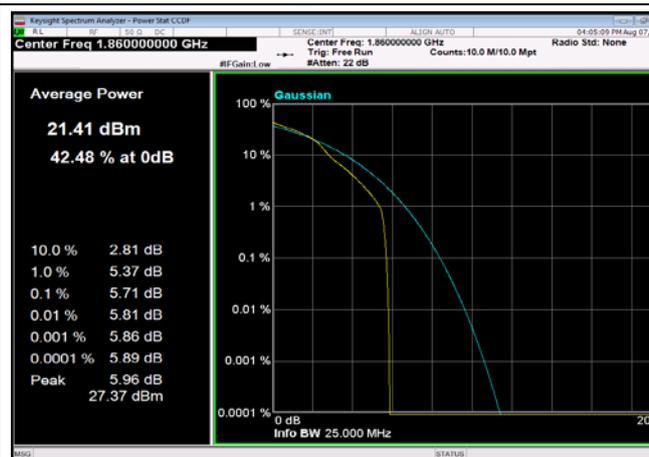


FDD02_LowRange_20MHz_1860_fullRB_Q16

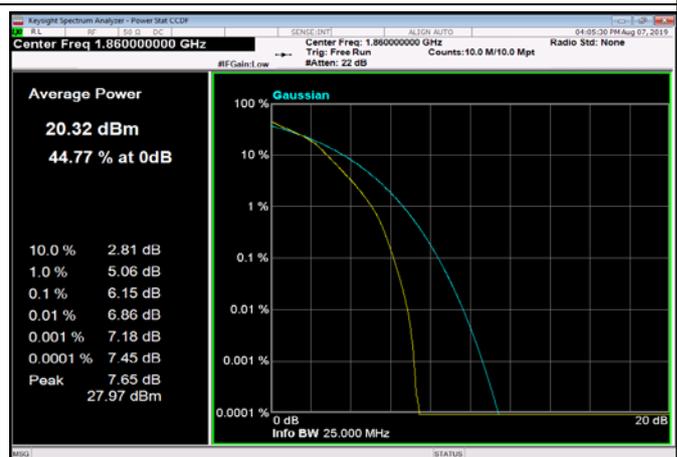

FDD02_MidRange_20MHz_1880_OneRB_high_Q16




FDD02_MidRange_20MHz_1880_fullRB_Q16

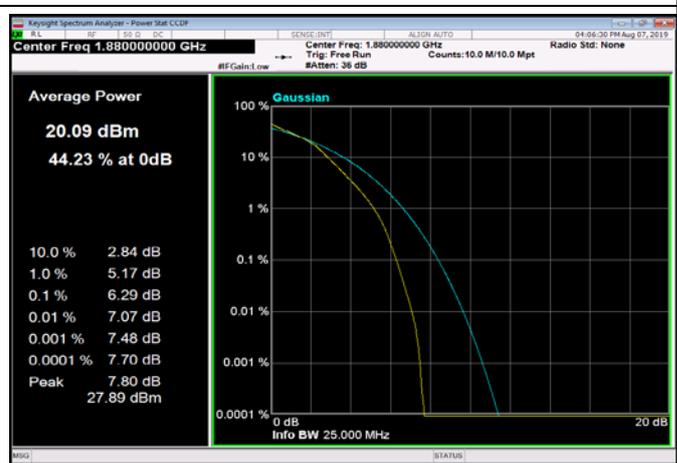




FDD02_HighRange_20MHz_1900_OneRB _high_Q16

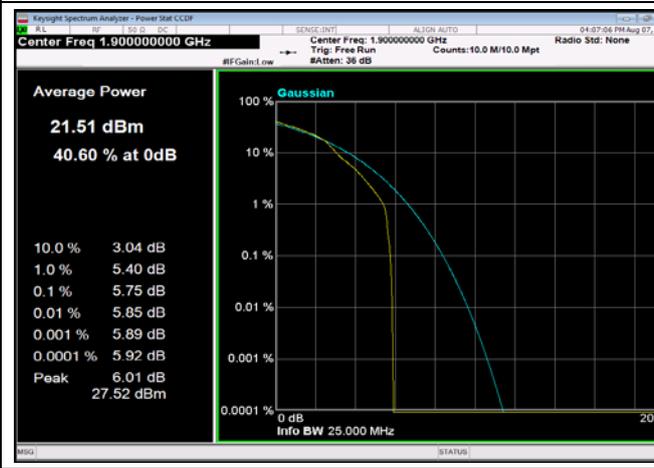

FDD02_HighRange_20MHz_1900_fullRB _Q16

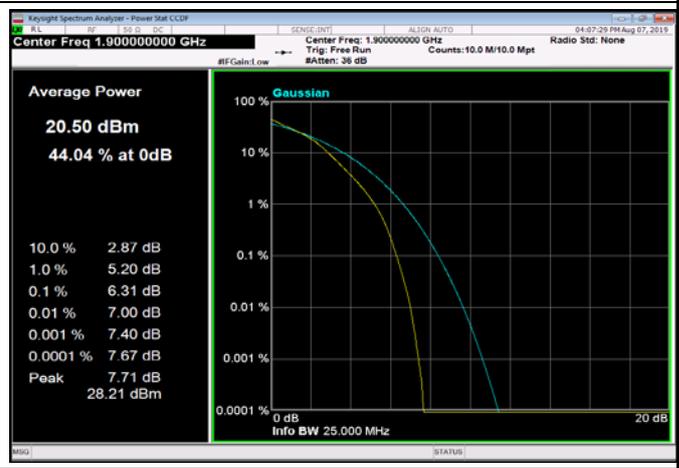



99% Occupied Bandwidth

Test Result and Data

Occupied Bandwidth NormalTC_NormalVol					
Band	Range	BandWidth	Frequency (MHz)	Modulation	Occupied Bandwidth(99%) (MHz)
FDD02	MidRange	1.4	1880	QPSK	1.091
FDD02	MidRange	1.4	1880	Q16	1.086
FDD02	MidRange	3	1880	QPSK	2.679
FDD02	MidRange	3	1880	Q16	2.678
FDD02	MidRange	5	1880	QPSK	4.489
FDD02	MidRange	5	1880	Q16	4.485
FDD02	MidRange	10	1880	QPSK	8.923
FDD02	MidRange	10	1880	Q16	8.916
FDD02	MidRange	15	1880	QPSK	13.44
FDD02	MidRange	15	1880	Q16	13.438
FDD02	MidRange	20	1880	QPSK	17.861
FDD02	MidRange	20	1880	Q16	17.861
FDD04	MidRange	1.4	1732.5	QPSK	1.085
FDD04	MidRange	1.4	1732.5	Q16	1.084
FDD04	MidRange	3	1732.5	QPSK	2.679
FDD04	MidRange	3	1732.5	Q16	2.676
FDD04	MidRange	5	1732.5	QPSK	4.489
FDD04	MidRange	5	1732.5	Q16	4.486
FDD04	MidRange	10	1732.5	QPSK	8.924
FDD04	MidRange	10	1732.5	Q16	8.916
FDD04	MidRange	15	1732.5	QPSK	13.436
FDD04	MidRange	15	1732.5	Q16	13.441
FDD04	MidRange	20	1732.5	QPSK	17.86
FDD04	MidRange	20	1732.5	Q16	17.858
FDD05	MidRange	1.4	836.5	QPSK	1.084
FDD05	MidRange	1.4	836.5	Q16	1.084
FDD05	MidRange	3	836.5	QPSK	2.678




FDD05	MidRange	3	836.5	Q16	2.677
FDD05	MidRange	5	836.5	QPSK	4.487
FDD05	MidRange	5	836.5	Q16	4.487
FDD05	MidRange	10	836.5	QPSK	8.923
FDD05	MidRange	10	836.5	Q16	8.917
FDD07	MidRange	5	2535	QPSK	4.482
FDD07	MidRange	5	2535	Q16	4.487
FDD07	MidRange	10	2535	QPSK	8.925
FDD07	MidRange	10	2535	Q16	8.921
FDD07	MidRange	15	2535	QPSK	13.449
FDD07	MidRange	15	2535	Q16	13.448
FDD07	MidRange	20	2535	QPSK	17.884
FDD07	MidRange	20	2535	Q16	17.876
FDD12	MidRange	1.4	707.5	QPSK	1.089
FDD12	MidRange	1.4	707.5	Q16	1.085
FDD12	MidRange	3	707.5	QPSK	2.679
FDD12	MidRange	3	707.5	Q16	2.677
FDD12	MidRange	5	707.5	QPSK	4.491
FDD12	MidRange	5	707.5	Q16	4.49
FDD12	MidRange	10	707.5	QPSK	8.925
FDD12	MidRange	10	707.5	Q16	8.918
FDD66	MidRange	1.4	1745	QPSK	1.091
FDD66	MidRange	1.4	1745	Q16	1.086
FDD66	MidRange	3	1745	QPSK	2.686
FDD66	MidRange	3	1745	Q16	2.68
FDD66	MidRange	5	1745	QPSK	4.491
FDD66	MidRange	5	1745	Q16	4.487
FDD66	MidRange	10	1745	QPSK	8.929
FDD66	MidRange	10	1745	Q16	8.921
FDD66	MidRange	15	1745	QPSK	13.453
FDD66	MidRange	15	1745	Q16	13.454
FDD66	MidRange	20	1745	QPSK	17.883




FDD66	MidRange	20	1745	Q16	17.879
-------	----------	----	------	-----	--------




FDD02_MidRange_1.4_1880_QPSK

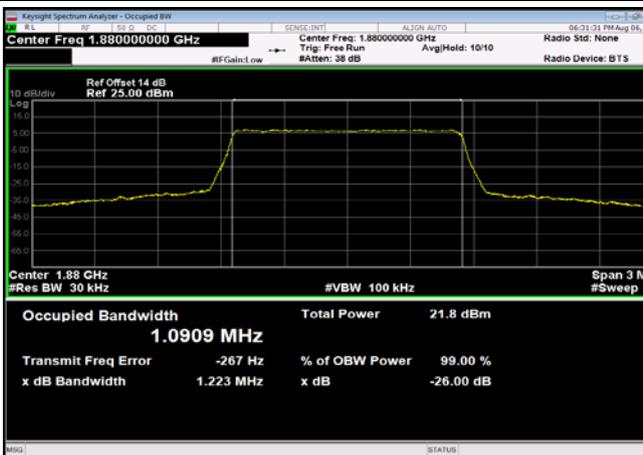


FDD02_MidRange_1.4_1880_Q16

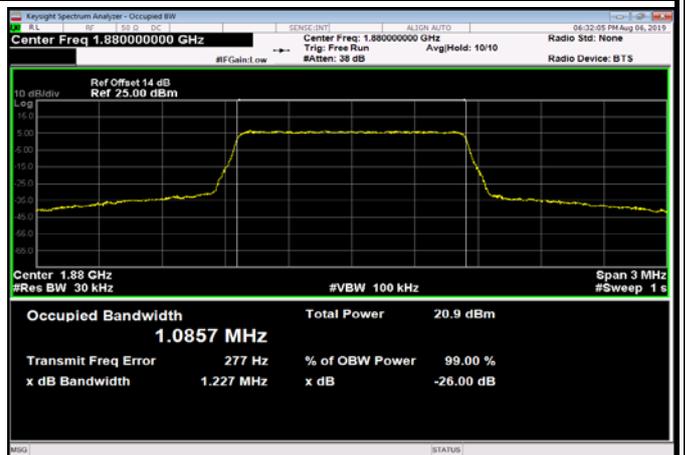


FDD02_MidRange_3_1880_QPSK

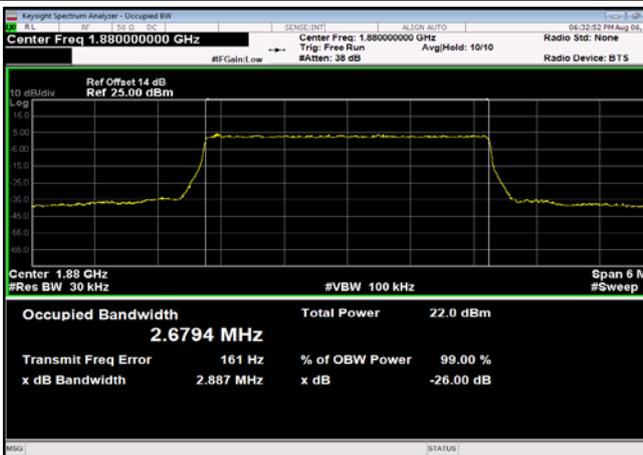


FDD02_MidRange_3_1880_Q16

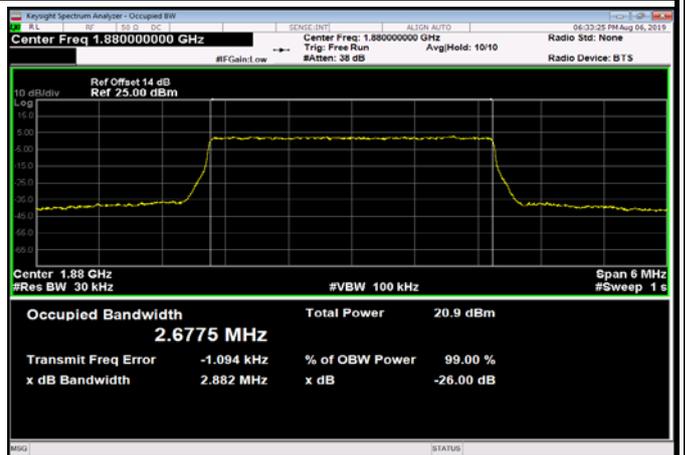

FDD02_MidRange_5_1880_QPSK

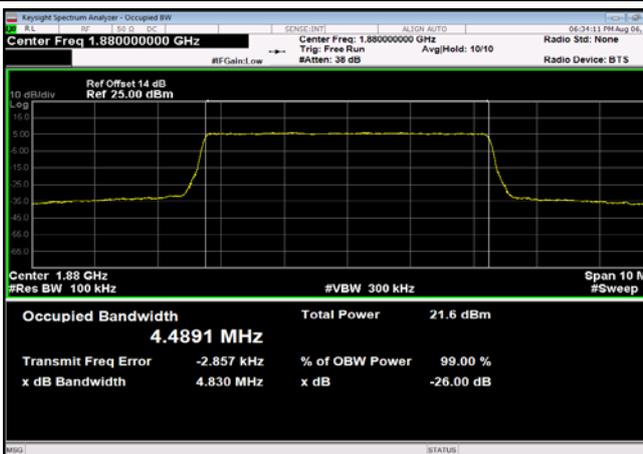


FDD02_MidRange_5_1880_Q16

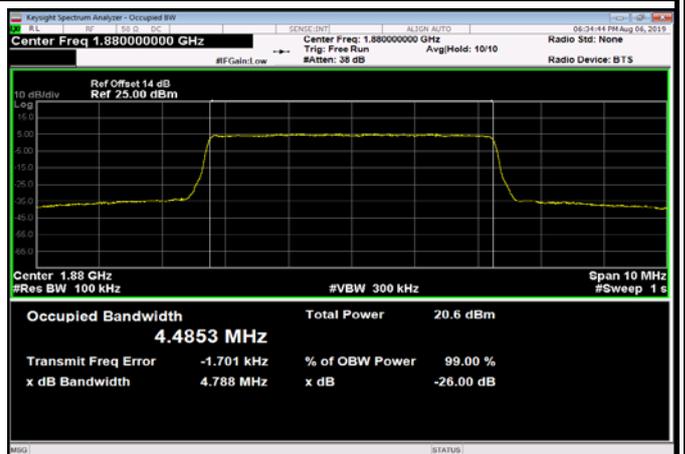





FDD02_MidRange_10_1880_QPSK

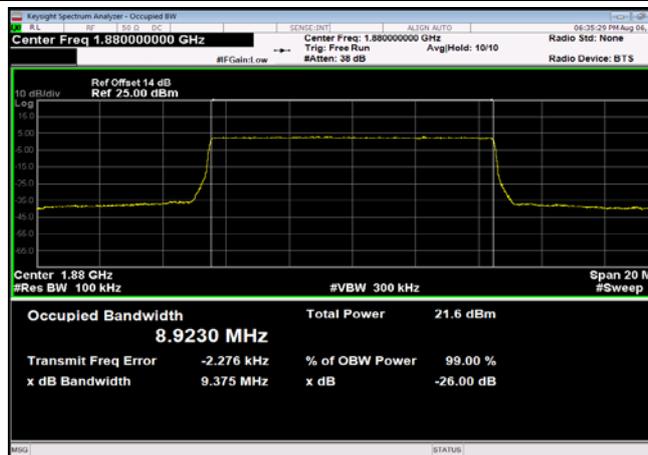


FDD02_MidRange_10_1880_Q16

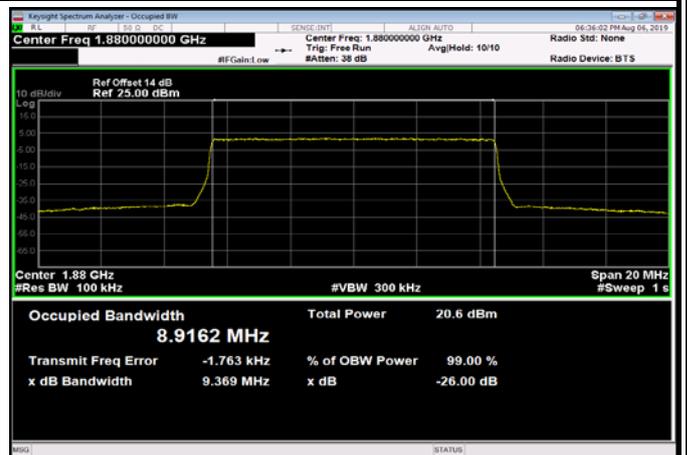


FDD02_MidRange_15_1880_QPSK

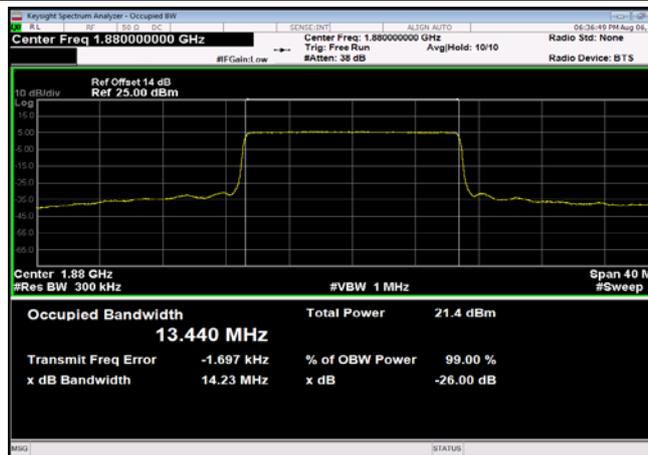


FDD02_MidRange_15_1880_Q16

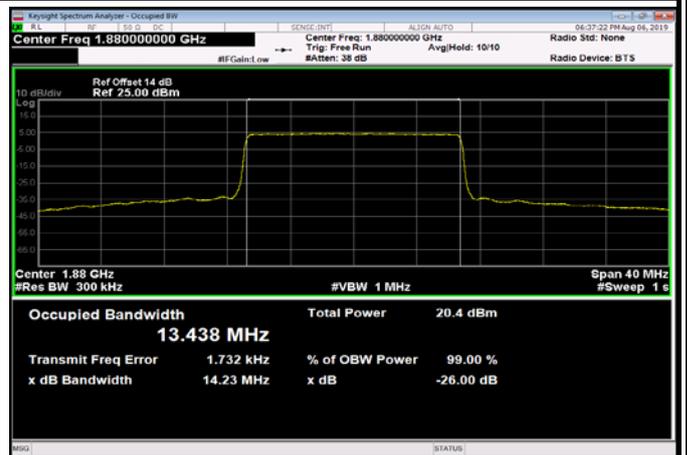

FDD02_MidRange_20_1880_QPSK

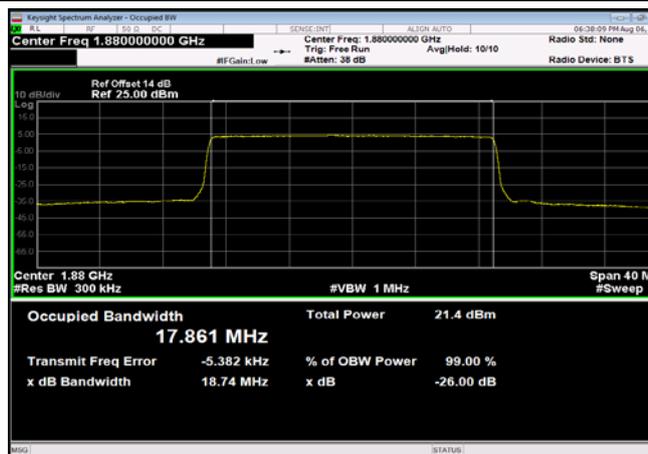


FDD02_MidRange_20_1880_Q16

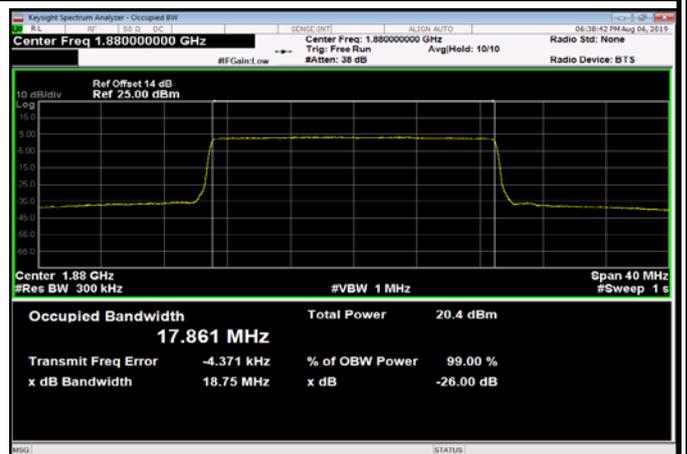





FDD04_MidRange_1.4_1732.5_QPSK

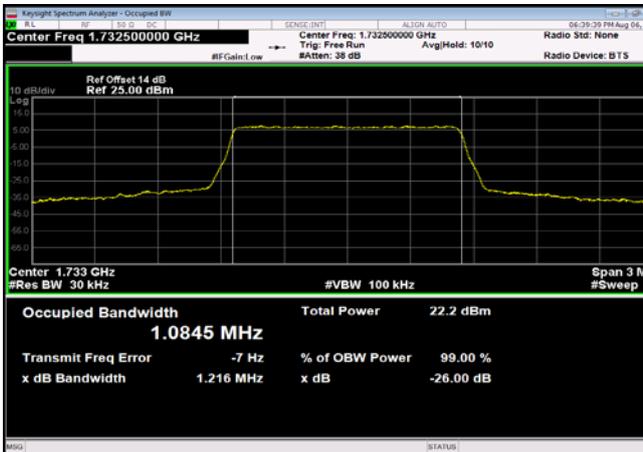


FDD04_MidRange_1.4_1732.5_Q16

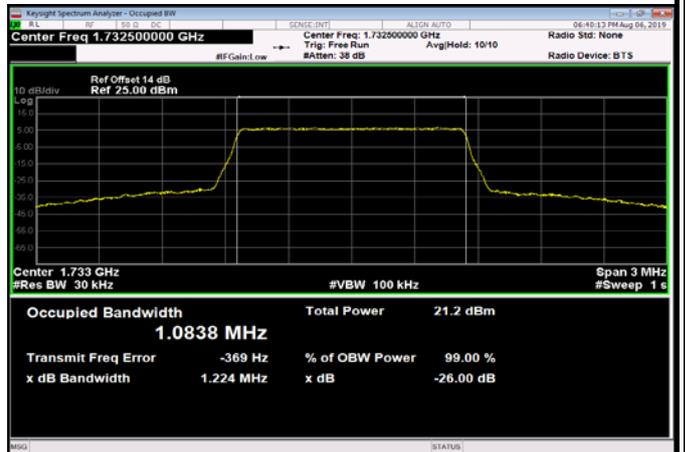


FDD04_MidRange_3_1732.5_QPSK

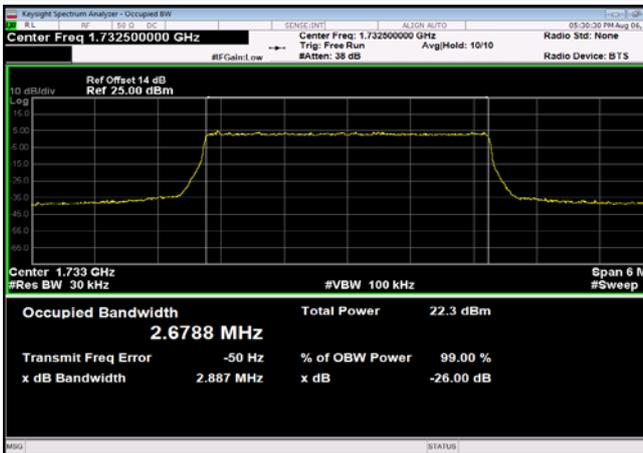


FDD04_MidRange_3_1732.5_Q16

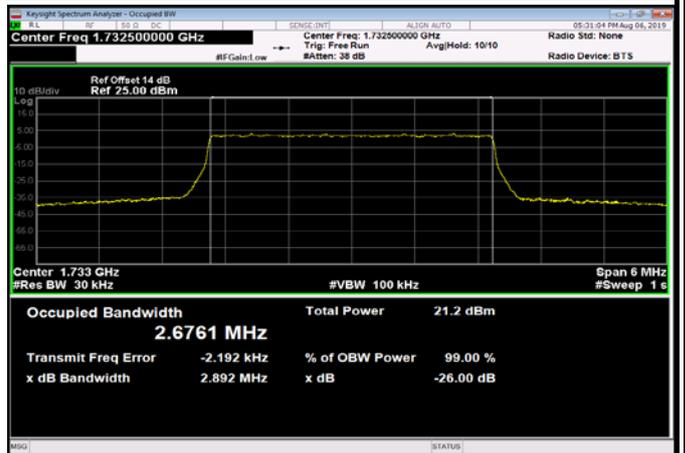

FDD04_MidRange_5_1732.5_QPSK

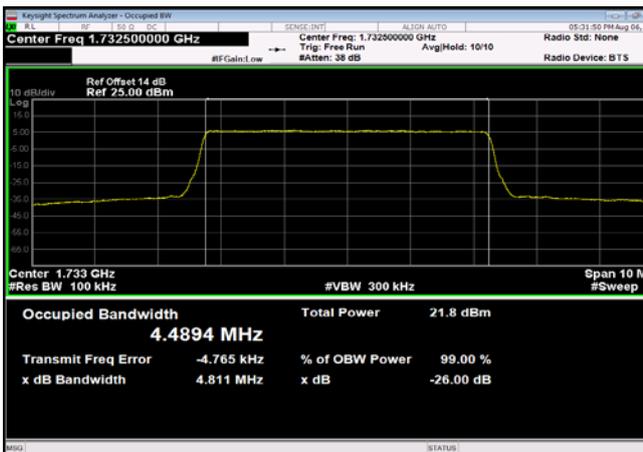


FDD04_MidRange_5_1732.5_Q16

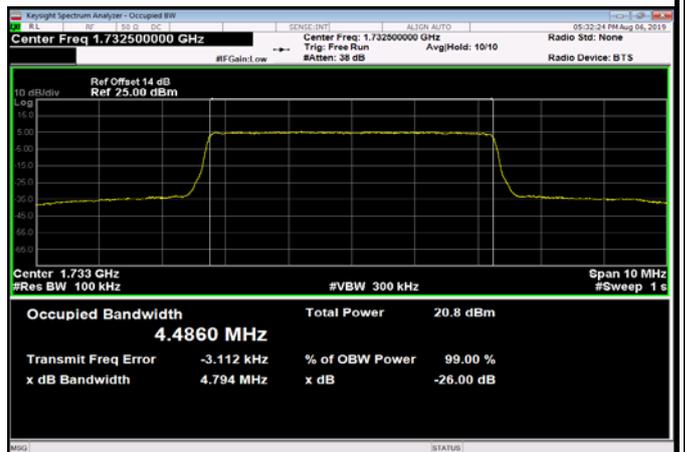





FDD04_MidRange_10_1732.5_QPSK

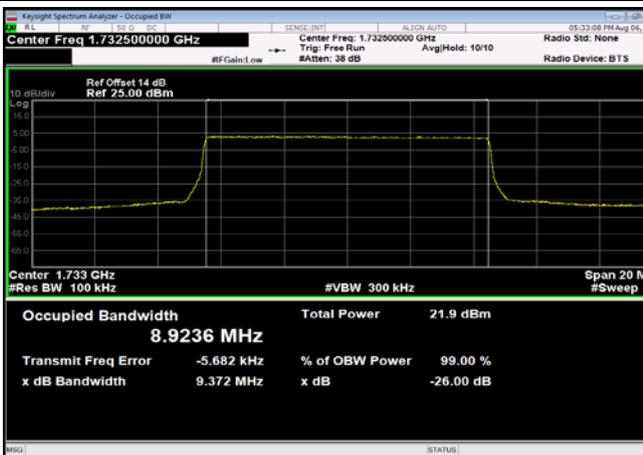


FDD04_MidRange_10_1732.5_Q16

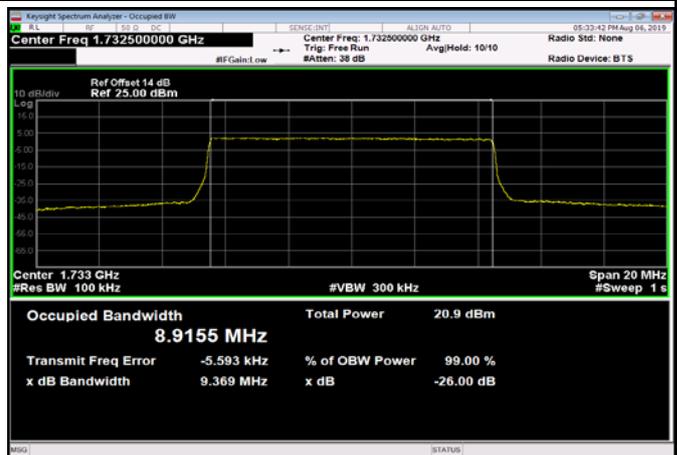


FDD04_MidRange_15_1732.5_QPSK

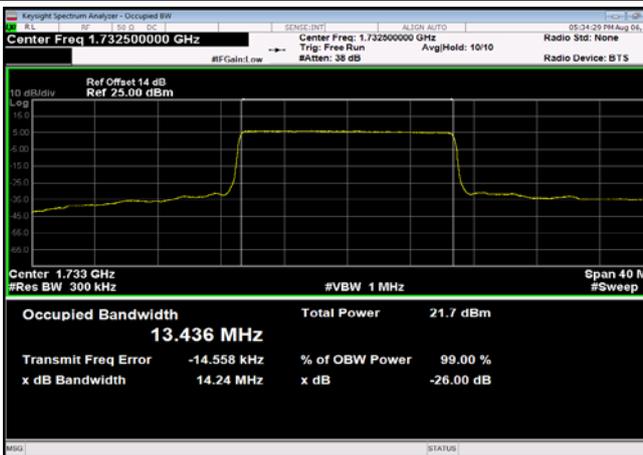

FDD04_MidRange_15_1732.5_Q16

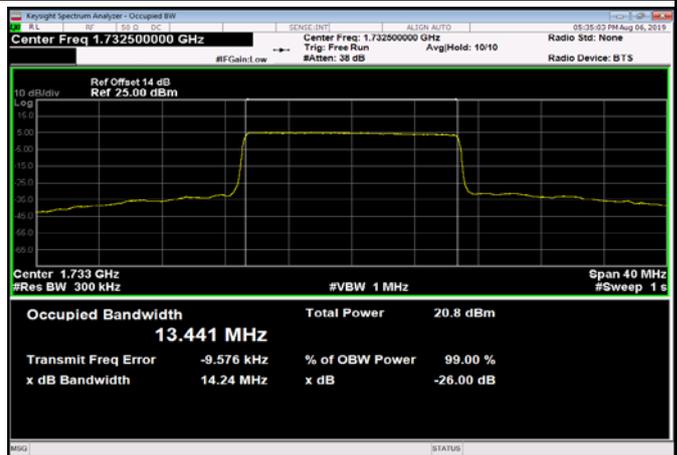

FDD04_MidRange_20_1732.5_QPSK

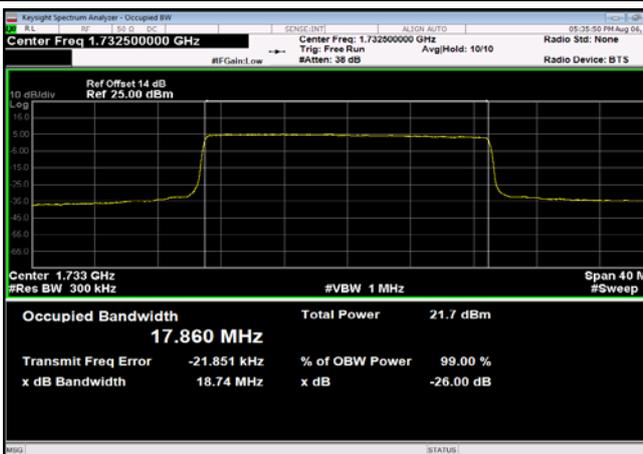

FDD04_MidRange_20_1732.5_Q16

