SPECIFICATION FOR APPROVAL

CUSTOMER:	
CUST P/N:	
BESOFTP/N:	
DESC:	Ф20.5x39-10Ts-0.08x24-10mm-CLB
DATE:	2020/11/16
Version:	A.0

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE
苏燕平	钱立谋	钱立谋	

Shenzhen Ruantou Electronics Co., Ltd.. Factory address: No. 90-6, Dayuan Road, No. 1 industrial zone, Gongming Street, Guangming District, Shenzhen

Tel: 13824883512/18038013240



Version Change History


Rev.	Before Change	After Change	Change Date	Approved By
A.0			2020/11/16	钱立谋

SPECIFICATION

DESC Φ20.5x39-10Ts-0.08x24-10mm-CLB Rev: A.0 CUST:

| CUST: | Fine P/N: | CUST P/N: |

一、 DIMENSION:(mm)

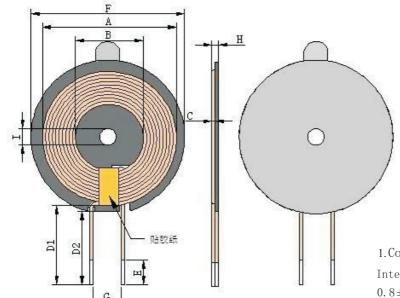

A	39.0 ± 1.5
В	20.5 ± 0.5
С	0.5 ± 0.1
D1	12 ref
D2	10±2
Е	3.5 ± 1.5
F	43.8 ± 0.5
G	11.0 ref
Н	1.2Max
Ι	5.3 ref

1.Coil mount disk, disk size 43.8 ± 0.8 mm, Internal orifice 5.3mm, Thickness 0.8 ±0.2 mm, open L slot.

- 2. Wrap the high temperature adhesive paper with the width of 8mm \pm 0.5 at the coil outlet.
- 3. The diameter Ordinary double-sided tape of manual tearing on the back of of the disk. was $42.8 \text{ mm}^{\bullet}$ (ref), and the bore was 6.0 mm (ref)

_,	SCHEMATIC DIAGRAM:	
S		F

三、 Winding Specification:

NO.	TERMIN	NAL	WIRE	Turns	Winding Direction
1	S	F	line 0.08*24*2P	10Ts	CCW

四、 ELECTRICAL CHARACTERISTICS:

TEMPERATURE:25 ±10°C, RELATIVE HUMIDITY:65 ±20%

NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±20%	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.3uH ±10%	100KHz/1.0V	LCZ METER 1062B
3	Q值	S-F	70.0(ref)	100KHz/1.0V	LCZ METER 1062B
4	DCR	S-F	≤50m Ω		LCZ METER 502B

PREPARED BY/DATE	CHECKED BY/DATE
苏燕平 2020/11/16	钱立谋 2020/11/16



SPECIFICATION

DESC Φ20.5x39-10Ts-0.08x24-10mm-CLB Rev: A.0 CUST:

CUST:


CUST:

CUST:

CUST P/N:

PACKONG:

5.1 Packing pictures:

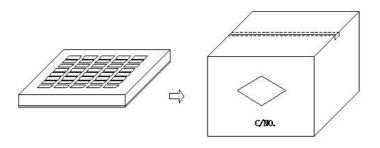

5.2 Packing Quantity:

Item	Quantity	Material
Box	3500 Pcs	370*265*55mm
Big Carton	1400 Pcs	420*270*310mm

PREPARED BY/DATE	CHECKED BY/DATE
苏燕平 2020/11/16	钱立谋 2020/11/16