

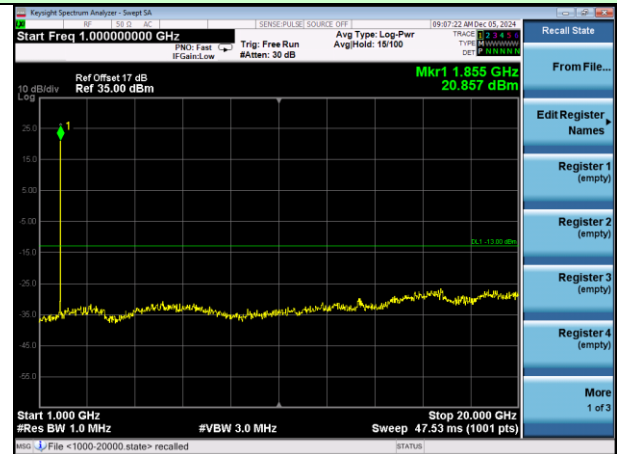


Test Mode: Traffic mode


WCDMA Band II (RMC 12.2Kbps link)

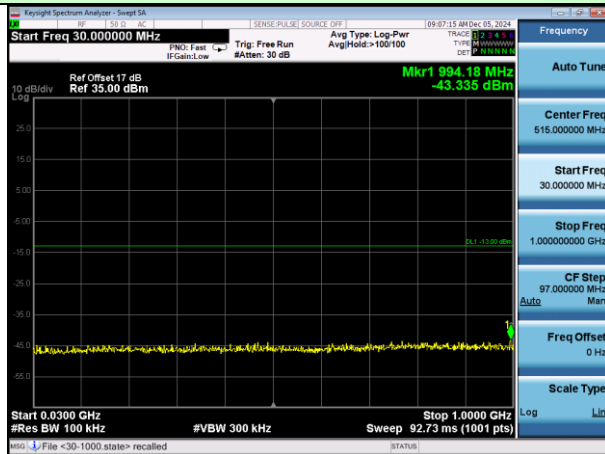

Lowest channel

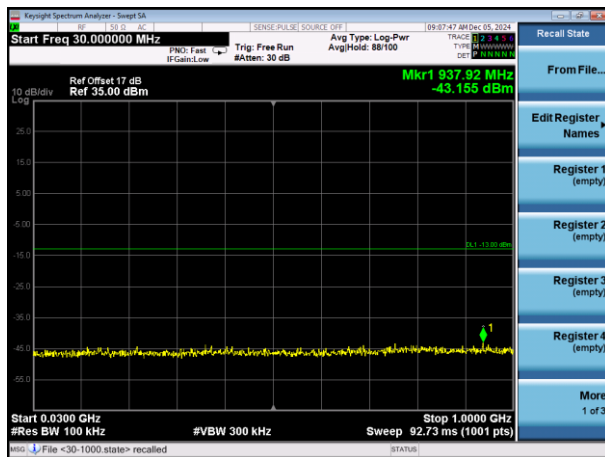


Middle channel

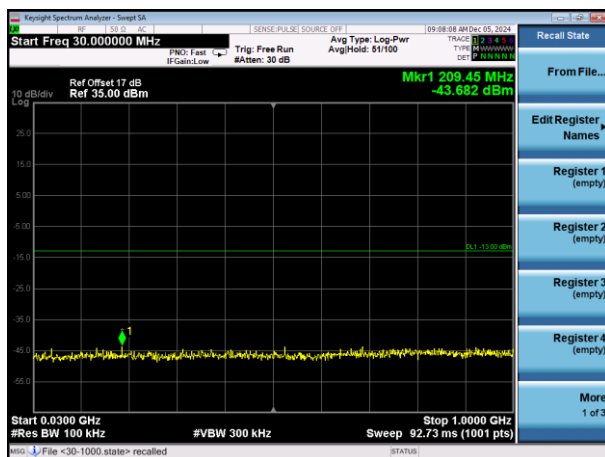

Highest channel

Test Mode: Traffic mode


WCDMA Band IV (RMC 12.2Kbps link)

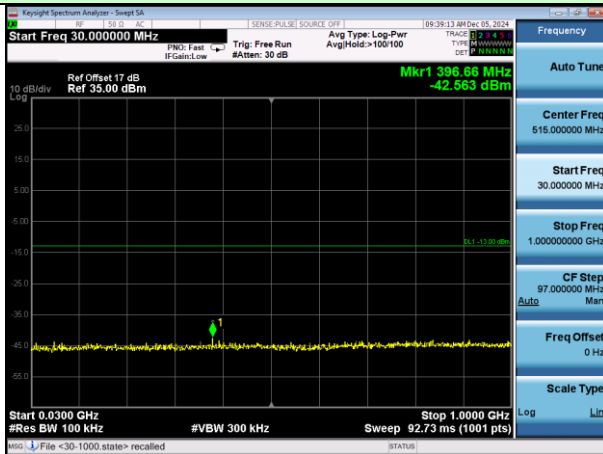

Lowest channel



Middle channel

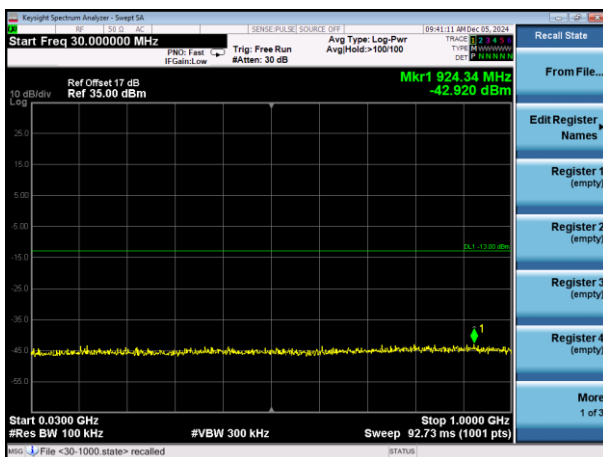


Highest channel


Band Edge:

Test Mode: Traffic mode

GSM850 (GPRS 1 link)

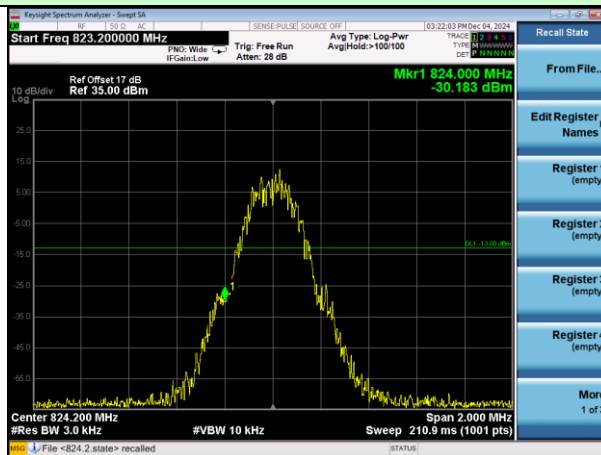


Lowest channel

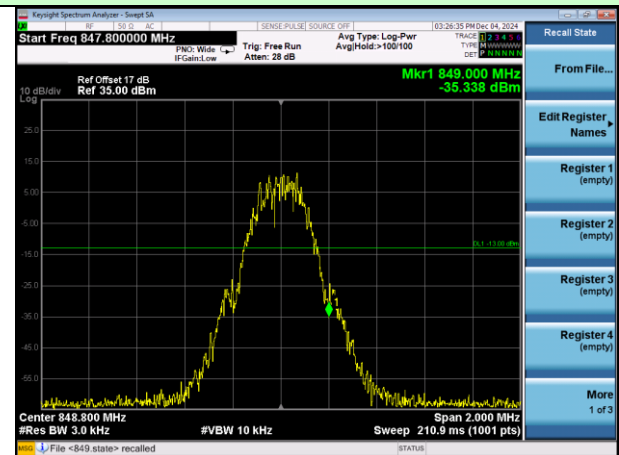


Highest channel

Test Mode: Traffic mode

GSM850 (EGPRS 1 link)

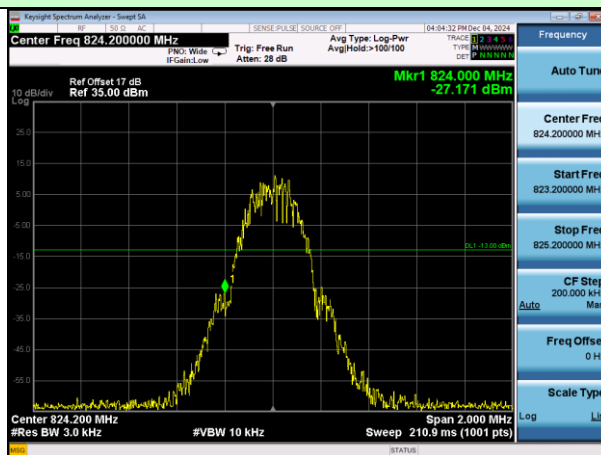


Lowest channel

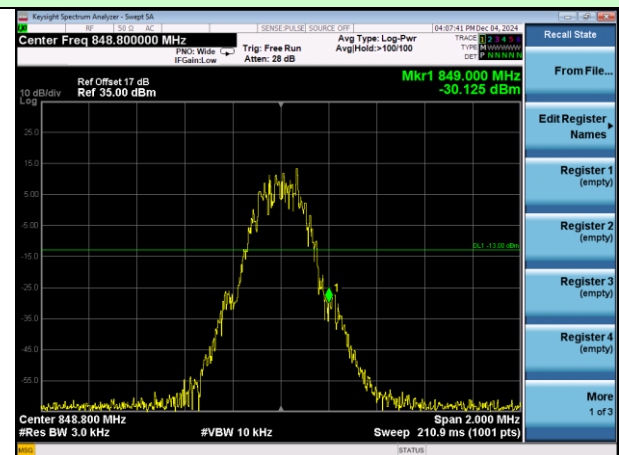


Highest channel

Test Mode: Traffic mode

PCS1900 (GPRS 1 link)

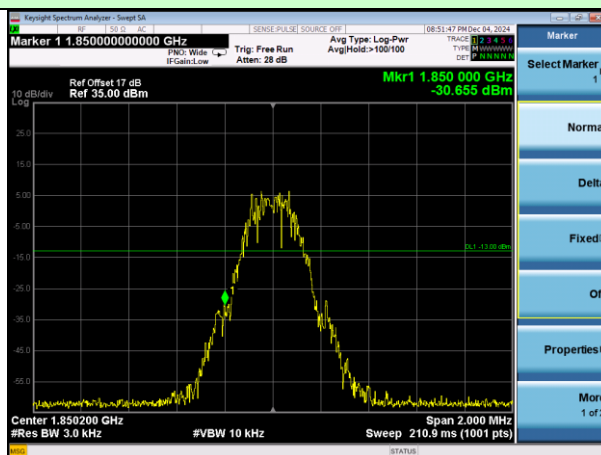


Lowest channel

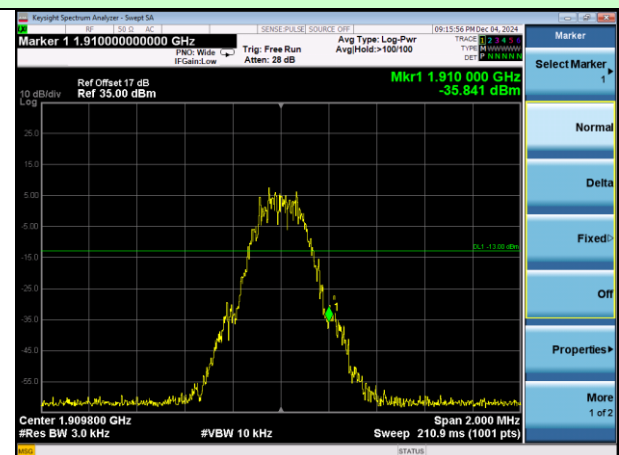


Highest channel

Test Mode: Traffic mode

PCS1900 (EGPRS 1 link)

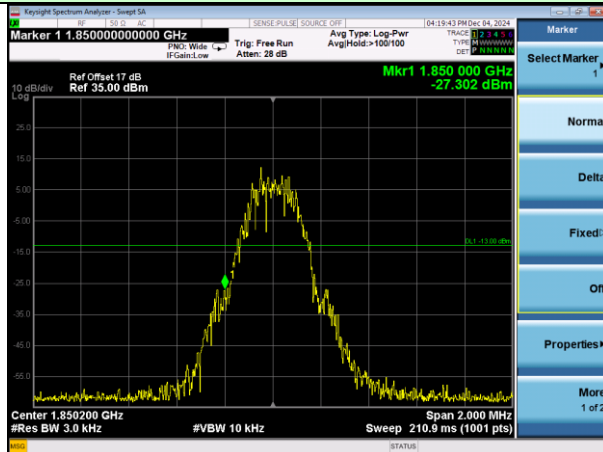


Lowest channel

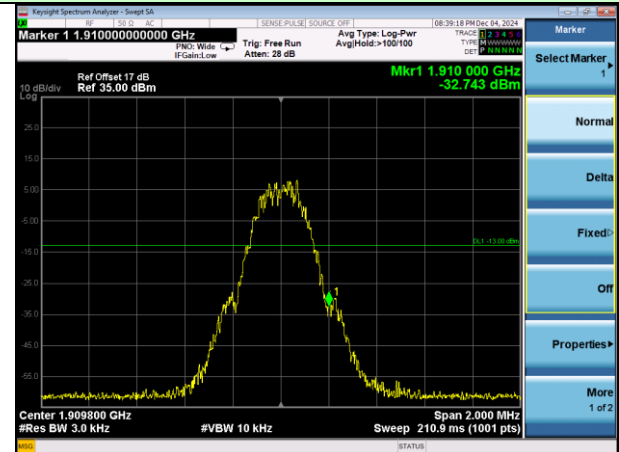

Highest channel

Test Mode: Traffic mode

WCDMA Band V (RMC 12.2Kbps link)

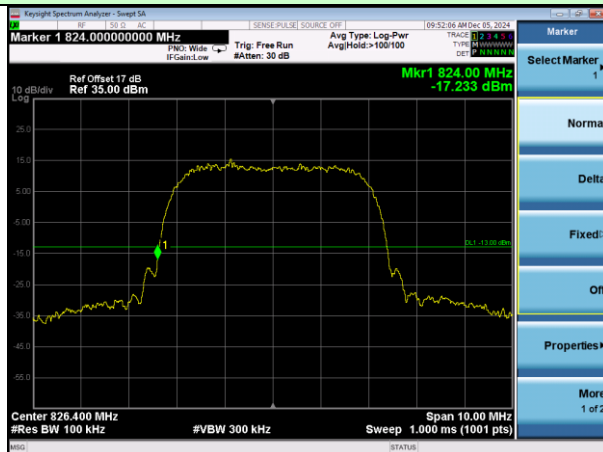

Lowest channel



Highest channel

Test Mode: Traffic mode

WCDMA Band II (RMC 12.2Kbps link)



Lowest channel



Highest channel

Test Mode: Traffic mode

WCDMA Band IV (RMC 12.2Kbps link)






Lowest channel



Highest channel

4.8 ERP, EIRP Measurement

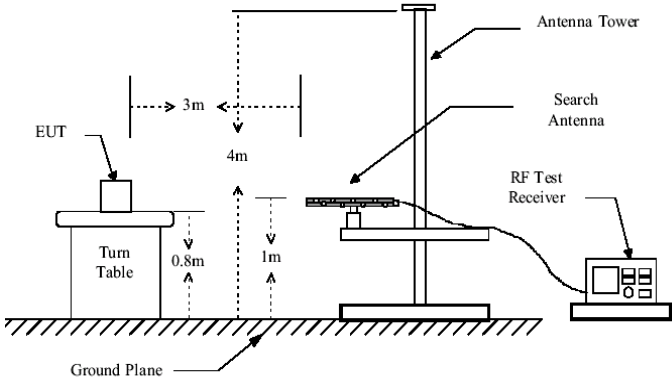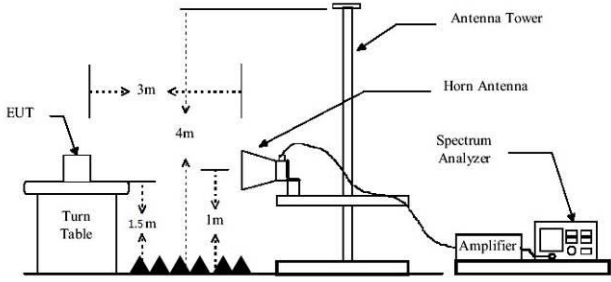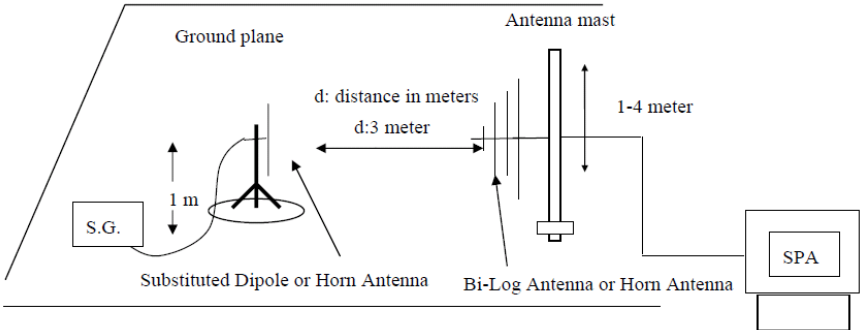Test Requirement:	FCC part22.913(a) and FCC part24.232(b) , Part 27.54(h)
Test Method:	FCC part2.1046
Limit:	GSM850, WCDMA Band V: 7W PCS1900, WCDMA Band II: 2W WCDMA Band IV: 1W
Test setup:	Below 1GHz  Above 1GHz  Substituted method: 

Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated. 3. ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows: $\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}$ 4. EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows: $\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Measurement Data

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850 (GPRS 1 link)	Lowest	H	V	24.58	38.45	Pass
			H	27.40		
		E1	V	25.68		
			H	25.48		
		E2	V	24.76		
			H	26.79		
	Middle	H	V	27.14	38.45	Pass
			H	24.07		
		E1	V	26.87		
			H	26.05		
		E2	V	25.87		
			H	26.79		
	Highest	H	V	27.05	38.45	Pass
			H	25.52		
		E1	V	23.78		
			H	27.81		
		E2	V	26.58		
			H	27.59		

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850 (EGPRS 1 link)	Lowest	H	V	23.05	38.45	Pass
			H	23.21		
		E1	V	24.23		
			H	23.58		
		E2	V	23.25		
			H	23.07		
	Middle	H	V	23.49	38.45	Pass
			H	23.28		
		E1	V	24.35		
			H	23.49		
		E2	V	22.51		
			H	23.51		
	Highest	H	V	24.78	38.45	Pass
			H	25.59		
		E1	V	24.02		
			H	23.94		
		E2	V	22.55		
			H	25.13		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP (dBm)	Limit (dBm)	Result
PCS1900 (GPRS 1 link)	Lowest	H	V	26.76	33.01	Pass
			H	27.02		
		E1	V	28.51		
			H	25.42		
		E2	V	25.53		
			H	28.91		
	Middle	H	V	29.13	33.01	Pass
			H	25.59		
		E1	V	28.80		
			H	25.12		
		E2	V	28.41		
			H	27.64		
	Highest	H	V	26.01	33.01	Pass
			H	25.40		
		E1	V	28.35		
			H	26.51		
		E2	V	27.57		
			H	25.21		




EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP (dBm)	Limit (dBm)	Result
PCS1900 (EGPRS 1 link)	Lowest	H	V	25.18	33.01	Pass
			H	25.46		
		E1	V	25.78		
			H	24.22		
		E2	V	23.64		
			H	23.97		
	Middle	H	V	25.13	33.01	Pass
			H	24.94		
		E1	V	26.00		
			H	23.47		
		E2	V	24.86		
			H	24.82		
	Highest	H	V	24.50	33.01	Pass
			H	27.35		
		E1	V	24.81		
			H	24.62		
		E2	V	23.98		
			H	26.71		

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
WCDMA Band V	Lowest	H	V	19.57	38.45	Pass
			H	19.20		
		E1	V	20.02		
			H	20.89		
		E2	V	17.53		
			H	18.27		
	Middle	H	V	20.54	38.45	Pass
			H	20.98		
		E1	V	19.79		
			H	18.70		
		E2	V	19.78		
			H	18.20		
	Highest	H	V	19.51	38.45	Pass
			H	19.29		
		E1	V	20.96		
			H	20.98		
		E2	V	17.81		
			H	19.68		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
WCDMA Band II	Lowest	H	V	20.39	33.01	Pass
			H	17.58		
		E1	V	20.35		
			H	18.96		
		E2	V	19.66		
			H	20.60		
	Middle	H	V	19.90	33.01	Pass
			H	18.08		
		E1	V	17.63		
			H	17.69		
		E2	V	19.62		
			H	19.57		
	Highest	H	V	19.44	33.01	Pass
			H	17.87		
		E1	V	21.16		
			H	20.40		
		E2	V	20.92		
			H	19.60		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
WCDMA Band IV	Lowest	H	V	19.69	33.01	Pass
			H	20.22		
		E1	V	21.88		
			H	21.32		
		E2	V	21.30		
			H	20.93		
	Middle	H	V	22.99	33.01	Pass
			H	20.78		
		E1	V	19.82		
			H	22.27		
		E2	V	22.16		
			H	19.26		
	Highest	H	V	20.52	33.01	Pass
			H	19.86		
		E1	V	23.12		
			H	22.33		
		E2	V	19.34		
			H	19.47		

4.9 Field strength of spurious radiation measurement

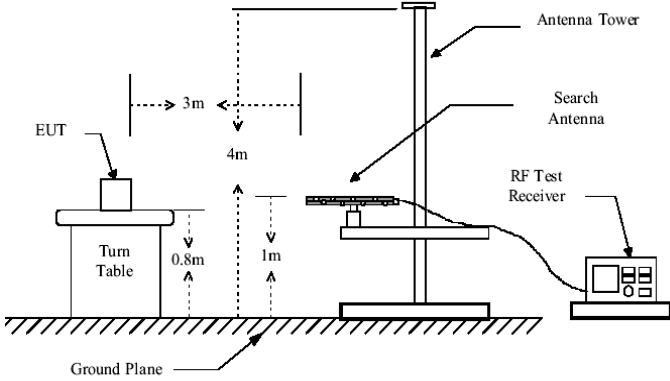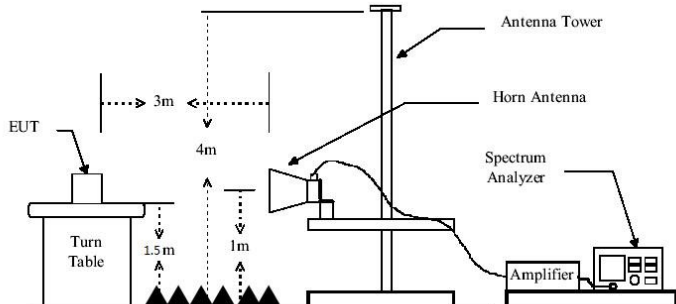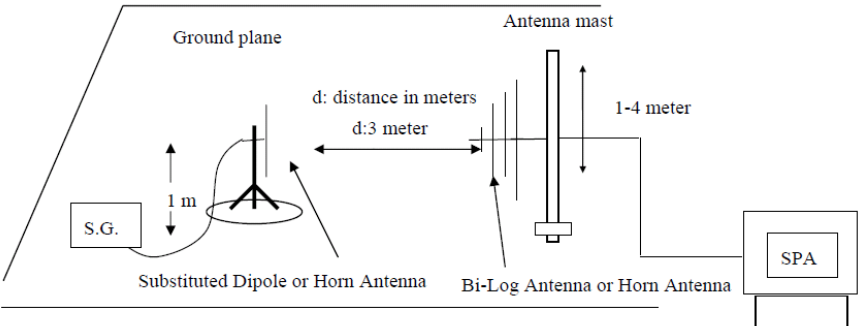Test Requirement:	FCC part22.917(a) and FCC part24.238(a), Part 27.54(h)
Test Method:	FCC part2.1053
Limit:	-13dBm
Test setup:	Below 1GHz  Above 1GHz  Substituted method: 

Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $\text{ERP / EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Measurement Data

Test mode:	GPRS850		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
235.97	V	-38.62	-13.00	Pass
584.89	V	-34.50		
1648.13	V	-39.22		
2472.21	V	-37.43		
3296.77	V	-35.27		
4121.11	V	-32.94		
4945.00	V	-31.17		
250.90	H	-36.59	-13.00	Pass
596.93	H	-39.31		
1648.57	H	-38.87		
2472.32	H	-37.24		
3296.84	H	-35.35		
4120.61	H	-32.87		
4945.10	H	-29.82		
Test mode:	EGPRS850		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
235.70	V	-38.40	-13.00	Pass
584.96	V	-34.33		
1697.80	V	-39.07		
2546.50	V	-37.18		
3395.27	V	-35.43		
4244.03	V	-33.22		
5092.64	V	-31.17		
250.77	H	-36.84	-13.00	Pass
597.04	H	-39.27		
1697.73	H	-39.01		
2546.09	H	-36.83		
3394.92	H	-35.68		
4243.75	H	-32.57		
5092.99	H	-29.65		

Remark :

1. The emission behaviour belongs to narrowband spurious emission.
2. The above table only shows the worst case channel of each mode.

Test mode:	GPRS1900		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
235.72	V	-38.42	-13.00	Pass
585.12	V	-34.10		
3700.13	V	-39.05		
5550.43	V	-37.33		
7400.88	V	-35.27		
9251.11	V	-33.27		
11101.02	V	-31.24		
250.76	H	-36.53	-13.00	Pass
596.77	H	-39.38		
3700.41	H	-39.04		
5550.21	H	-36.87		
7400.81	H	-35.80		
9250.63	H	-32.94		
11101.37	H	-29.73		
Test mode:	EGPRS1900		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
235.70	V	-38.67	-13.00	Pass
584.77	V	-34.52		
3819.22	V	-39.35		
5729.17	V	-37.42		
7638.82	V	-35.45		
9548.66	V	-33.19		
11458.67	V	-30.95		
250.83	H	-36.80	-13.00	Pass
597.05	H	-39.33		
3819.21	H	-39.10		
5729.52	H	-37.18		
7639.38	H	-35.47		
9548.79	H	-32.98		
11458.76	H	-29.59		

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. The above table only shows the worst case channel of each mode.

Test mode:	WCDMA Band V		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
235.80	V	-38.41	-13.00	Pass
584.77	V	-34.11		
1652.71	V	-39.37		
2478.91	V	-37.51		
3305.59	V	-35.32		
4131.91	V	-33.18		
4958.05	V	-30.89		
250.91	H	-36.83	-13.00	Pass
596.98	H	-39.32		
1652.88	H	-39.06		
2479.33	H	-36.83		
3305.24	H	-35.81		
4131.67	H	-32.55		
4958.00	H	-29.76		
Test mode:	WCDMA Band V		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
235.71	V	-38.68	-13.00	Pass
584.91	V	-34.24		
1672.95	V	-39.47		
2509.83	V	-37.59		
3346.32	V	-35.57		
4182.75	V	-33.33		
5019.31	V	-31.34		
251.09	H	-36.67	-13.00	Pass
596.87	H	-39.11		
1672.83	H	-38.67		
2509.64	H	-36.83		
3346.03	H	-35.56		
4182.94	H	-32.54		
5019.28	H	-29.49		
Test mode:	WCDMA Band V		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
236.04	V	-38.41	-13.00	Pass
584.93	V	-34.20		
1693.15	V	-39.14		
2539.79	V	-37.22		
3386.23	V	-35.69		
4232.78	V	-33.03		
5079.63	V	-30.99		
250.88	H	-36.97	-13.00	Pass
596.67	H	-39.47		
1693.21	H	-38.92		
2539.44	H	-37.17		
3386.47	H	-35.76		
4232.61	H	-32.83		
5079.74	H	-29.53		

Remark :

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured

Test mode:	WCDMA Band II		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
235.98	V	-38.65	-13.00	Pass
584.95	V	-34.17		
3704.44	V	-39.04		
5556.94	V	-37.36		
7409.24	V	-35.66		
9261.65	V	-33.31		
11114.24	V	-31.11		
250.98	H	-36.96	-13.00	Pass
596.68	H	-39.40		
3704.59	H	-38.96		
5556.94	H	-37.24		
7409.63	H	-35.36		
9262.01	H	-32.72		
11114.03	H	-29.65		
Test mode:	WCDMA Band II		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
235.90	V	-38.62	-13.00	Pass
584.80	V	-34.25		
3759.71	V	-39.47		
5639.86	V	-37.34		
7519.94	V	-35.46		
9399.99	V	-33.02		
11279.60	V	-31.26		
250.89	H	-36.72	-13.00	Pass
596.92	H	-39.26		
3760.09	H	-38.73		
5640.09	H	-37.25		
7519.93	H	-35.51		
9400.15	H	-32.67		
11279.61	H	-29.80		
Test mode:	WCDMA Band II		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
235.82	V	-38.81	-13.00	Pass
584.74	V	-34.58		
3815.00	V	-39.11		
5722.83	V	-37.47		
7630.20	V	-35.27		
9537.69	V	-33.12		
11445.37	V	-31.03		
250.82	H	-36.52	-13.00	Pass
597.07	H	-39.14		
3814.82	H	-38.85		
5722.55	H	-37.00		
7630.54	H	-35.57		
9537.83	H	-32.90		
11445.48	H	-29.92		

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured

Test mode:	WCDMA Band IV		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
235.78	V	-38.67	-13.00	Pass
584.70	V	-34.50		
3424.69	V	-39.21		
5137.06	V	-37.37		
6849.51	V	-35.29		
8561.96	V	-33.18		
10274.16	V	-31.06		
250.81	H	-36.74	-13.00	Pass
597.04	H	-39.18		
3424.40	H	-38.71		
5136.93	H	-37.20		
6849.52	H	-35.59		
8561.67	H	-33.00		
10274.46	H	-29.66		
Test mode:	WCDMA Band IV		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
235.87	V	-38.57	-13.00	Pass
584.78	V	-34.40		
3479.91	V	-39.36		
5219.99	V	-37.57		
6959.81	V	-35.73		
8699.97	V	-33.08		
10439.71	V	-31.31		
250.89	H	-36.74	-13.00	Pass
596.67	H	-39.12		
3480.20	H	-38.72		
5219.70	H	-37.00		
6960.13	H	-35.70		
8700.18	H	-32.85		
10439.68	H	-29.78		
Test mode:	WCDMA Band IV		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
235.99	V	-38.60	-13.00	Pass
585.07	V	-34.52		
3504.91	V	-39.28		
5257.82	V	-37.55		
7010.42	V	-35.31		
8762.65	V	-32.84		
10515.65	V	-30.93		
250.98	H	-36.90	-13.00	Pass
596.62	H	-39.25		
3505.38	H	-38.72		
5257.67	H	-37.26		
7010.31	H	-35.74		
8762.68	H	-32.82		
10515.64	H	-29.67		

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured

4.10 Frequency stability V.S. Temperature measurement

Test Requirement:	FCC Part2.1055(a)(1)(b)
Test Method:	FCC Part2.1055(a)(1)(b)
Limit:	2.5ppm
Test setup:	Note : Measurement setup for testing on Antenna connector
Test procedure:	1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to –20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Measurement Data

Reference Frequency: GSM850 (GPRS 1 link) Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12	-20	10	0.0120	2.5	Pass
	-10	21	0.0251		
	0	15	0.0179		
	10	-29	-0.0347		
	20	18	0.0215		
	30	12	0.0143		
	40	-1	-0.0012		
	50	2	0.0024		
	60	13	0.0155		
Reference Frequency: GSM850 (EGPRS 1 link) Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12	-20	12	0.0143	2.5	Pass
	-10	14	0.0167		
	0	16	0.0191		
	10	-22	-0.0263		
	20	18	0.0215		
	30	8	0.0096		
	40	0	0.0000		
	50	4	0.0048		
	60	11	0.0131		

Reference Frequency: PCS1900 (GPRS 1 link) Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error			Result
		Hz	ppm		
12	-20	14	0.0074	2.5	Pass
	-10	18	0.0096		
	0	13	0.0069		
	10	-24	-0.0128		
	20	19	0.0101		
	30	12	0.0064		
	40	-3	-0.0016		
	50	-1	-0.0005		
	60	15	0.0080		
Reference Frequency: PCS1900 (EGPRS 1 link) Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error			Result
		Hz	ppm		
12	-20	16	0.0085	2.5	Pass
	-10	18	0.0096		
	0	18	0.0096		
	10	-28	-0.0149		
	20	17	0.0090		
	30	10	0.0053		
	40	-4	-0.0021		
	50	-1	-0.0005		
	60	16	0.0085		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12	-20	16	0.0191	2.5	Pass
	-10	14	0.0167		
	0	18	0.0215		
	10	-25	-0.0299		
	20	22	0.0263		
	30	11	0.0131		
	40	-3	-0.0036		
	50	3	0.0036		
	60	11	0.0131		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880.0MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12	-20	11	0.0059	2.5	Pass
	-10	16	0.0085		
	0	14	0.0074		
	10	-25	-0.0133		
	20	17	0.0090		
	30	5	0.0027		
	40	-3	-0.0016		
	50	1	0.0005		
	60	10	0.0053		
Reference Frequency: WCDMA Band IV Middle channel=1450 channel=1740.0MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.8	-20	11	0.0063	2.5	Pass
	-10	21	0.0121		
	0	15	0.0086		
	10	-25	-0.0144		
	20	18	0.0103		
	30	11	0.0063		
	40	-1	-0.0006		
	50	-2	-0.0011		
	60	11	0.0063		

4.11 Frequency stability V.S. Voltage measurement

Test Requirement:	FCC Part2.1055(d)(1)(2)
Test Method:	FCC Part2.1055(d)(1)(2)
Limit:	2.5ppm
Test setup:	Note : Measurement setup for testing on Antenna connector
Test procedure:	1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Measurement Data

Reference Frequency: GSM850 (GPRS 1 link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	36	12	0.0143	2.5	Pass
	24	20	0.0239		
	9	15	0.0179		
Reference Frequency: GSM850 (EGPRS 1 link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	36	-23	-0.0275	2.5	Pass
	24	20	0.0239		
	9	9	0.0108		
Reference Frequency: PCS1900 (GPRS 1 link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	36	17	0.0090	2.5	Pass
	24	14	0.0074		
	9	13	0.0069		
Reference Frequency: PCS1900 (EGPRS 1 link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	36	-29	-0.0154	2.5	Pass
	24	18	0.0096		
	9	10	0.0053		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	36	17	0.0203	2.5	Pass
	24	21	0.0251		
	9	20	0.0239		
Reference Frequency: WCDMA Band II Middle channel=940 channel=1880.0MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	36	3	0.0016	2.5	Pass
	24	-1	-0.0005		
	9	14	0.0074		
Reference Frequency: WCDMA Band IV Middle channel=1450 channel=1740.0MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	36	13	0.0075	2.5	Pass
	24	18	0.0103		
	9	14	0.0080		

5 Test Setup Photo

Radiated Emission



-----END OF REPORT-----