

3. 20 dB BW

3.1 Test Setup

Refer to the APPENDIX I.

3.2 Limit

Limit : Not Applicable

3.3 Test Procedure

1. The 20 dB bandwidth were measured with a spectrum analyzer connected to RF antenna Connector (conducted measurement) while EUT was operating in transmit mode. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using below setting: RBW shall be in the range of 1% to 5% of the 20 dB bandwidth and VBW $\geq 3 \times$ RBW, Span = between two times and five times the 20 dB bandwidth.

3.4 Test Results

Modulation	Tested Channel	20 dB BW (MHz)
<u>GFSK</u>	Lowest	0.930
	Middle	0.880
	Highest	0.880
<u>$\pi/4$DQPSK</u>	Lowest	1.320
	Middle	1.310
	Highest	1.320
<u>8DPSK</u>	Lowest	1.260
	Middle	1.260
	Highest	1.260

Note 1 : See next pages for actual measured spectrum plots.

20 dB Bandwidth

Lowest Channel & Modulation : GFSK

20 dB Bandwidth

Middle Channel & Modulation : GFSK

20 dB Bandwidth

Highest Channel & Modulation : GFSK

20 dB Bandwidth

Lowest Channel & Modulation : $\pi/4$ DQPSK



20 dB Bandwidth

Middle Channel & Modulation : $\pi/4$ DQPSK



20 dB Bandwidth

Highest Channel & Modulation : $\pi/4$ DQPSK



20 dB Bandwidth

Lowest Channel & Modulation : 8DPSK

20 dB Bandwidth

Middle Channel & Modulation : 8DPSK



20 dB Bandwidth

Highest Channel & Modulation : 8DPSK



4. Carrier Frequency Separation

4.1 Test Setup

Refer to the APPENDIX I.

4.2 Limit

Limit : ≥ 25 kHz or \geq Two-Thirds of the 20 dB BW whichever is greater.

4.3 Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to :

Span = wide enough to capture the peaks of two adjacent channels

RBW = Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

4.4 Test Results

FH mode

Hopping Mode	Test Mode	Peak of center channel (MHz)	Peak of adjacent Channel (MHz)	Test Result (MHz)
Enable	GFSK	2439.971	2440.974	1.003
	$\pi/4$ -DQPSK	2440.985	2441.991	1.006
	8DPSK	2440.973	2441.982	1.009

AFH mode


Hopping Mode	Test Mode	Peak of center channel (MHz)	Peak of adjacent Channel (MHz)	Test Result (MHz)
Enable	GFSK	2411.003	2412.009	1.006
	$\pi/4$ -DQPSK	2409.989	2410.995	1.006
	8DPSK	2410.982	2411.982	1.000

Note 1 : See next pages for actual measured spectrum plots.

- Minimum Standard :


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400 - 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

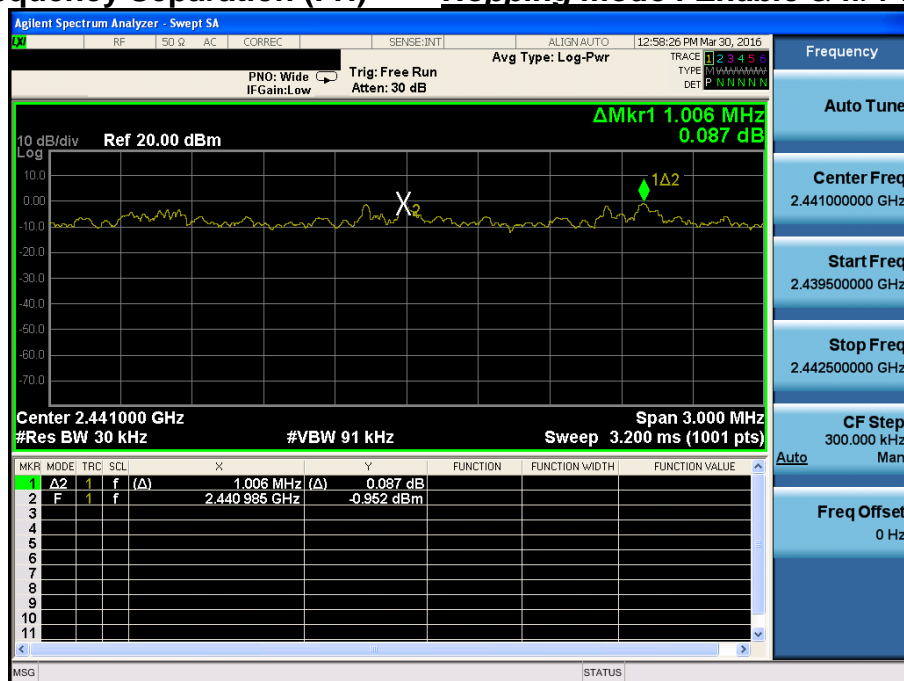Carrier Frequency Separation (FH) *Hopping mode : Enable & GFSK***Carrier Frequency Separation (FH) *Hopping mode : Enable & π/4-DQPSK***




Carrier Frequency Separation (FH) *Hopping mode : Enable & 8DPSK*

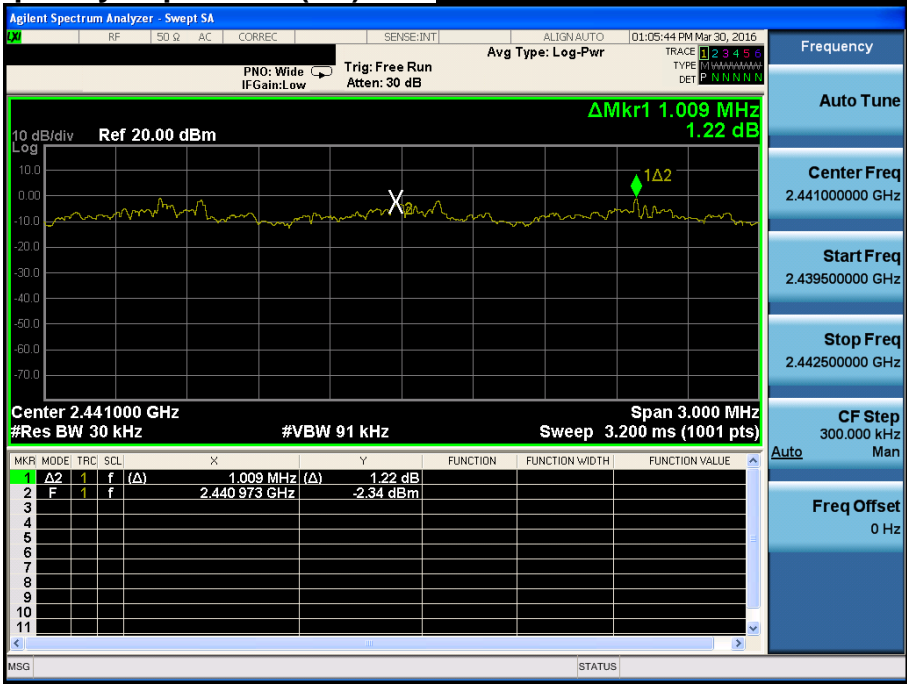

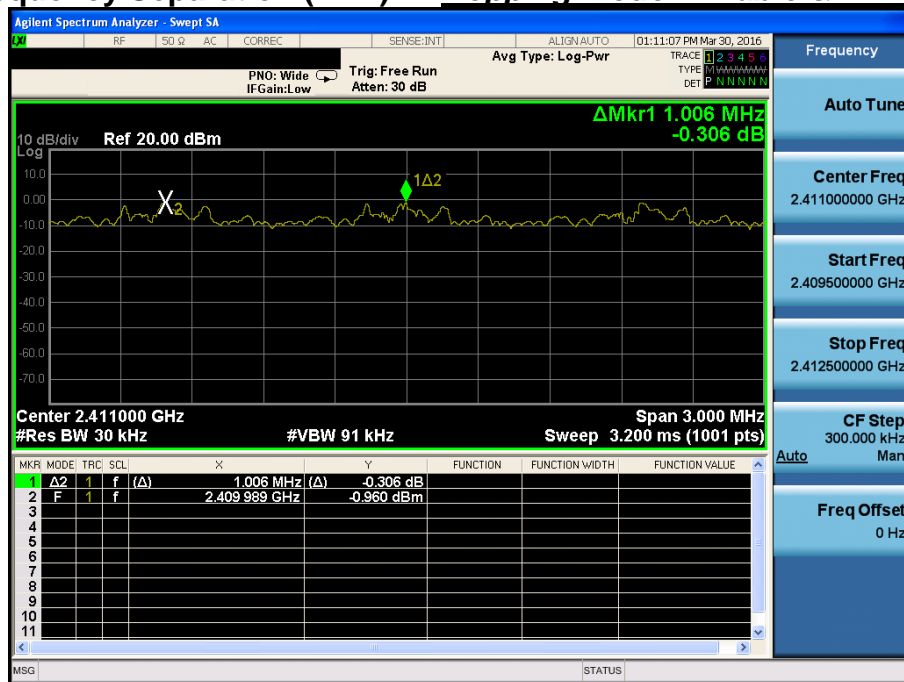Carrier Frequency Separation (AFH) *Hopping mode : Enable & GFSK***Carrier Frequency Separation (AFH) *Hopping mode : Enable & $\pi/4$ -DQPSK***



Carrier Frequency Separation (AFH) *Hopping mode : Enable & 8DPSK*

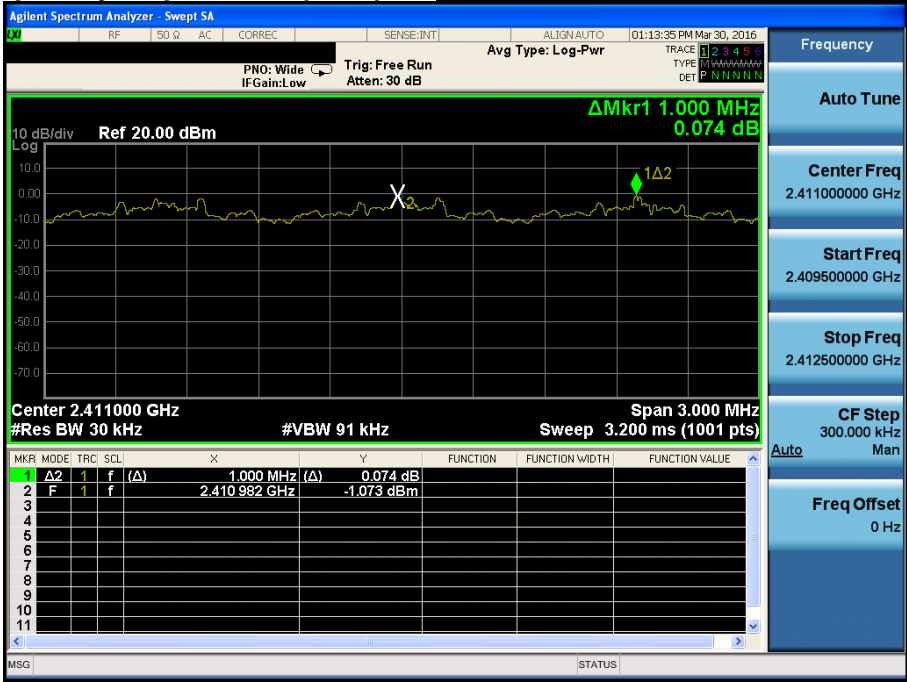

5. Number of Hopping Frequencies

5.1 Test Setup

Refer to the APPENDIX I.

5.2 Limit

Limit : ≥ 15 hops

5.3 Procedure

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, two frequency ranges for FH mode within the 2400 ~ 2483.5 MHz were examined.

The spectrum analyzer is set to :

Span for FH mode = 50 MHz Start Frequency = 2391.5 MHz, Stop Frequency = 2441.5 MHz

Start Frequency = 2441.5 MHz, Stop Frequency = 2491.5 MHz

Span for AFH mode = 30 MHz Start Frequency = 2396.0 MHz, Stop Frequency = 2426.0 MHz

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.4 Test Results

FH mode

Hopping mode	Test mode	Test Result (Total Hops)
Enable	GFSK	79
	$\pi/4$ -DQPSK	79
	8DPSK	79



AFH mode


Hopping mode	Test mode	Test Result (Total Hops)
Enable	GFSK	20
	$\pi/4$ -DQPSK	20
	8DPSK	20



Note 1 : See next pages for actual measured spectrum plots.



- Minimum Standard :

At least 15 hops

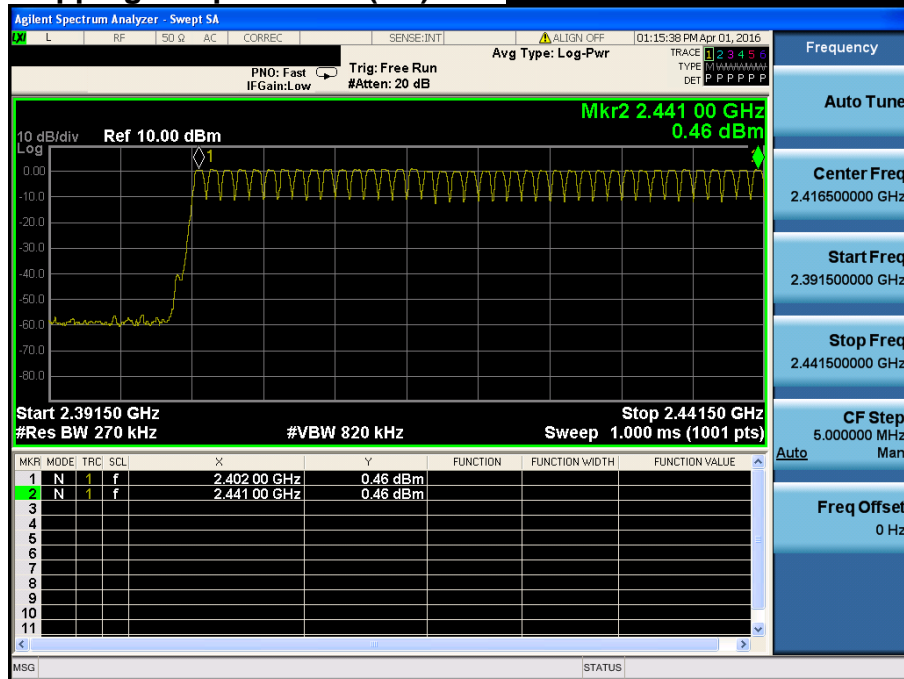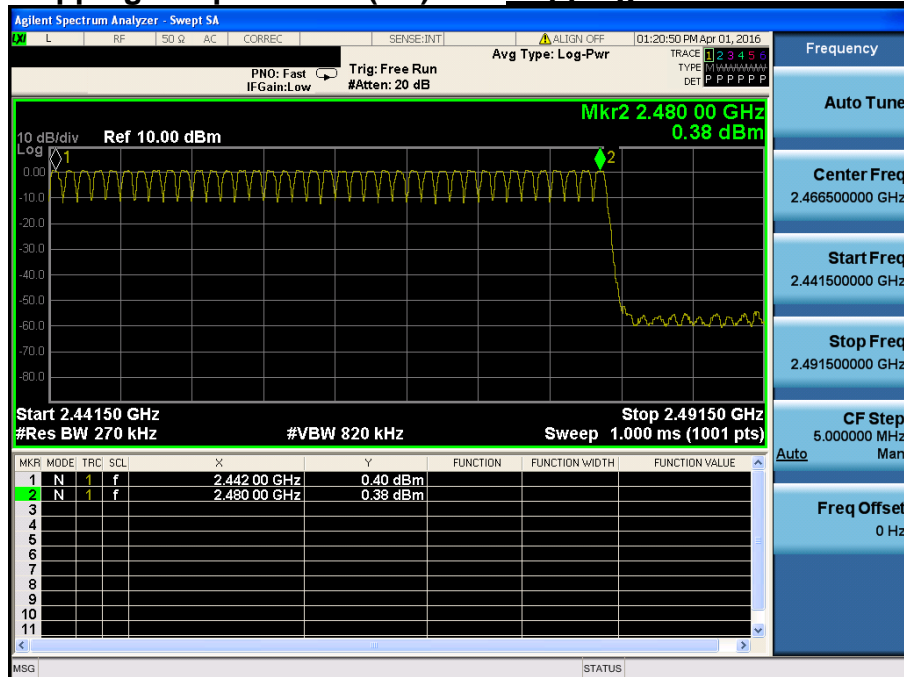Number of Hopping Frequencies 1(FH) Hopping mode : Enable & GFSK**Number of Hopping Frequencies 2(FH) Hopping mode : Enable & GFSK**

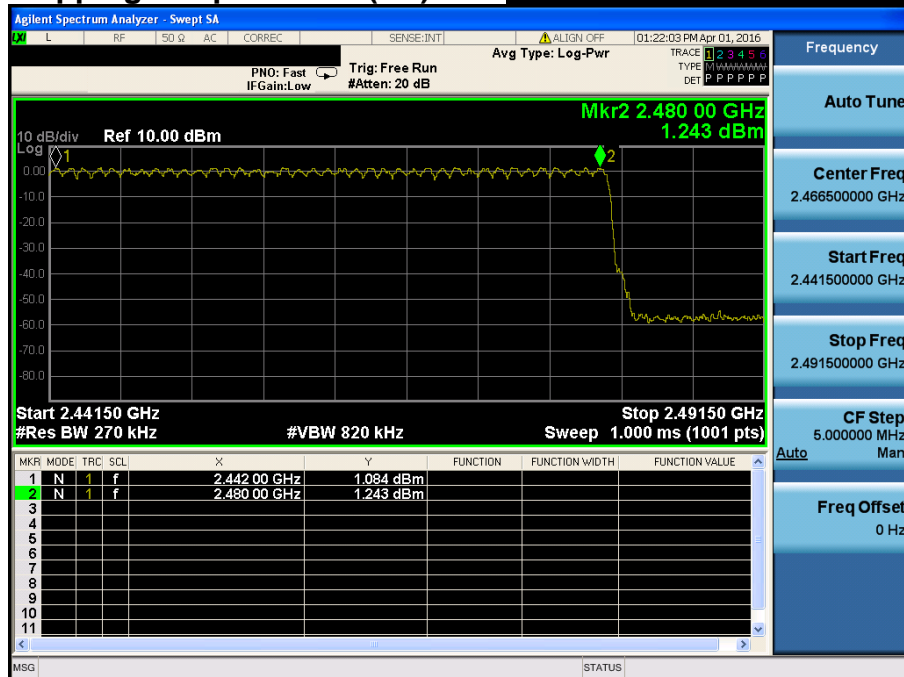
Number of Hopping Frequencies 1(FH) **Hopping mode : Enable & $\pi/4$ -DQPSK****Number of Hopping Frequencies 2(FH)** **Hopping mode : Enable & $\pi/4$ -DQPSK**

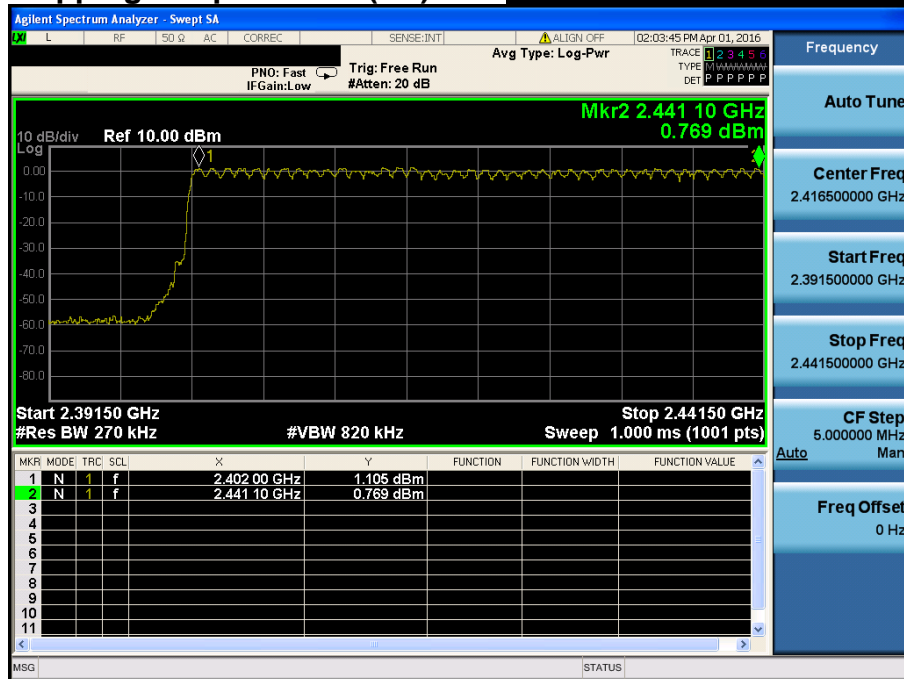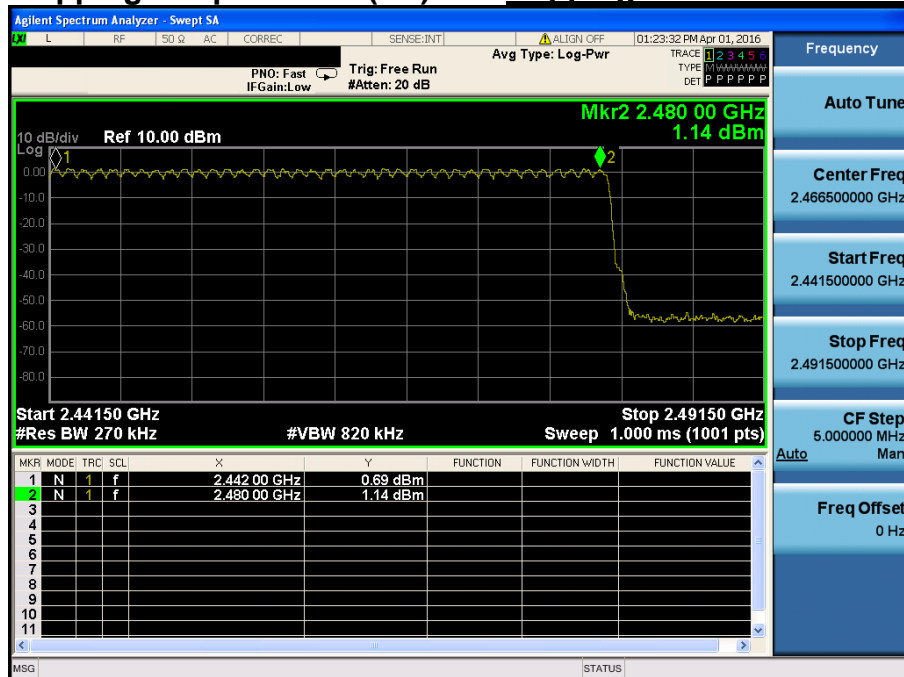Number of Hopping Frequencies 1(FH) *Hopping mode : Enable & 8DPSK***Number of Hopping Frequencies 2(FH) *Hopping mode : Enable & 8DPSK***

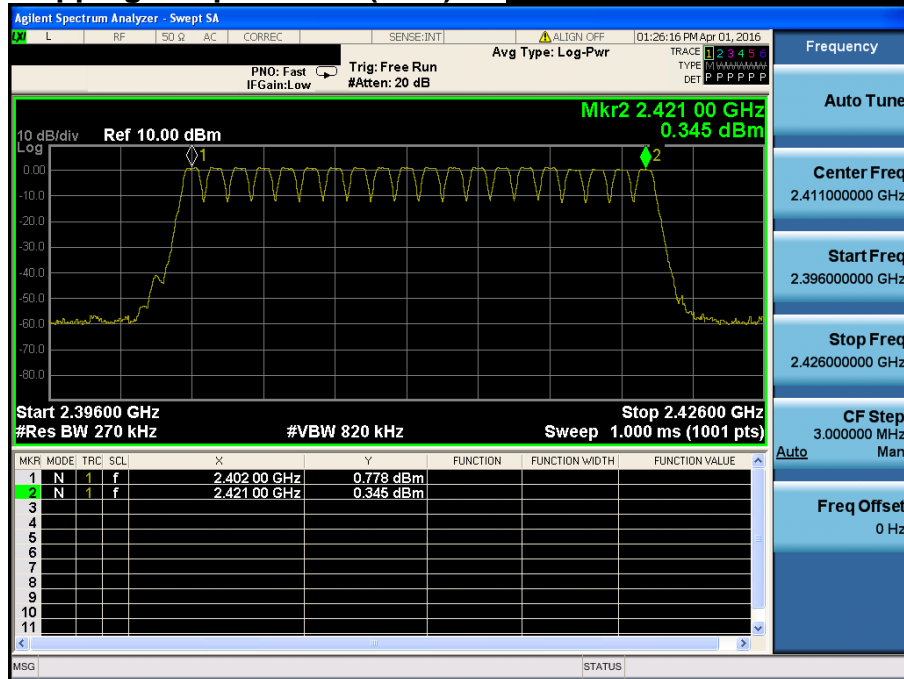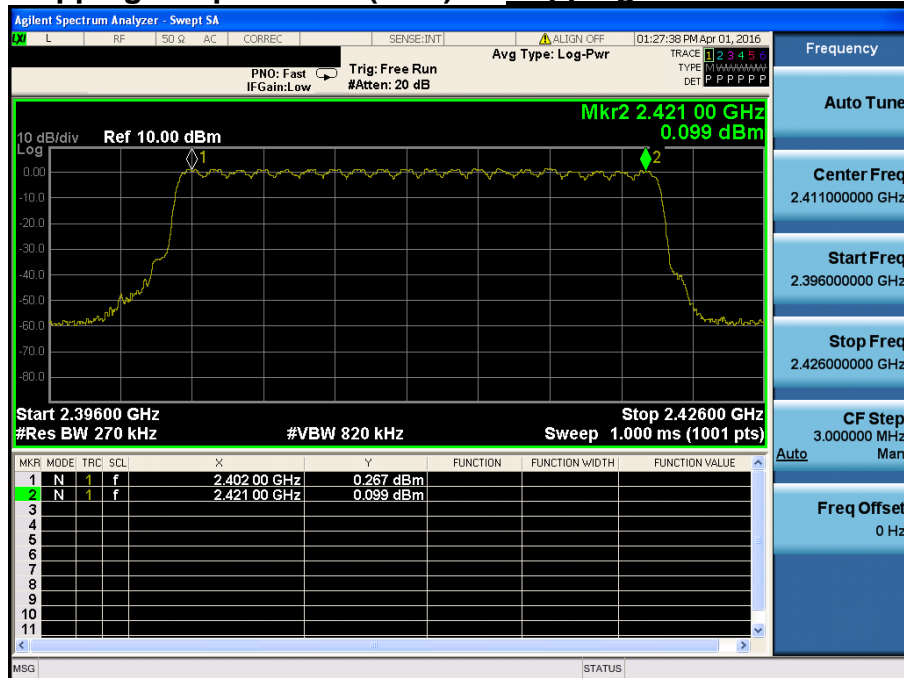Number of Hopping Frequencies 1(AFH) *Hopping mode : Enable & GFSK***Number of Hopping Frequencies 1(AFH) *Hopping mode : Enable & $\pi/4$ -DQPSK***



Number of Hopping Frequencies 1(AFH) *Hopping mode : Enable & 8DPSK*

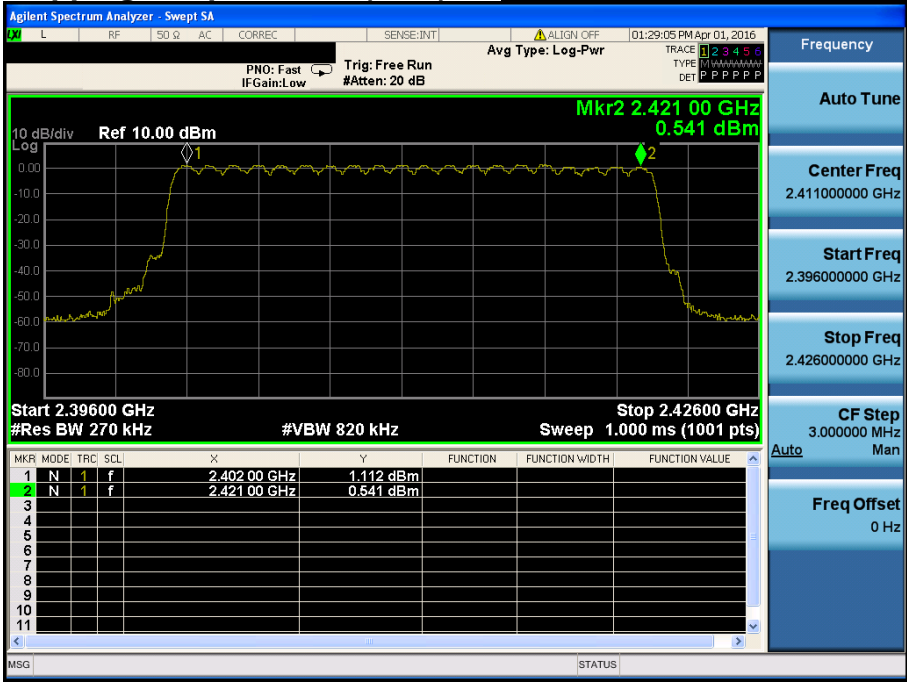

6. Time of Occupancy (Dwell Time)

6.1 Test Setup

Refer to the APPENDIX I.

6.2 Limit

The maximum permissible time of occupancy is 400 ms within a period of 400 ms multiplied by the number of hopping channels employed.

6.3 Test Procedure

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to :

Center frequency = 2441 MHz

Span = zero

RBW = 1 MHz (RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel)

VBW \geq RBW

Detector function = peak

Trace = max hold

6.4 Test Results

FH mode

Hopping mode	Packet Type	Number of hopping Channels	Burst On Time (ms)	Period (ms)	Test Result (sec)
Enable	DH 5	79	2.880	3.750	0.307
	2 DH 5	79	2.880	3.750	0.307
	3 DH 5	79	2.880	3.750	0.307

AFH mode



Hopping mode	Packet Type	Number of hopping Channels	Burst On Time (ms)	Period (ms)	Test Result (sec)
Enable	DH 5	20	2.880	3.750	0.154
	2 DH 5	20	2.880	3.750	0.154
	3 DH 5	20	2.880	3.750	0.154

Note 1 : Dwell Time = $0.4 \times \text{Hopping channel} \times \text{Burst ON time} \times ((\text{Hopping rate} \div \text{Time slots}) \div \text{Hopping channel})$

- Time slots for DH5 = 6 slots (TX = 5 slot / RX = 1 slot)

- Hopping Rate = 1600 for FH mode & 800 for AFH mode


Note 2 : See next pages for actual measured spectrum plots.

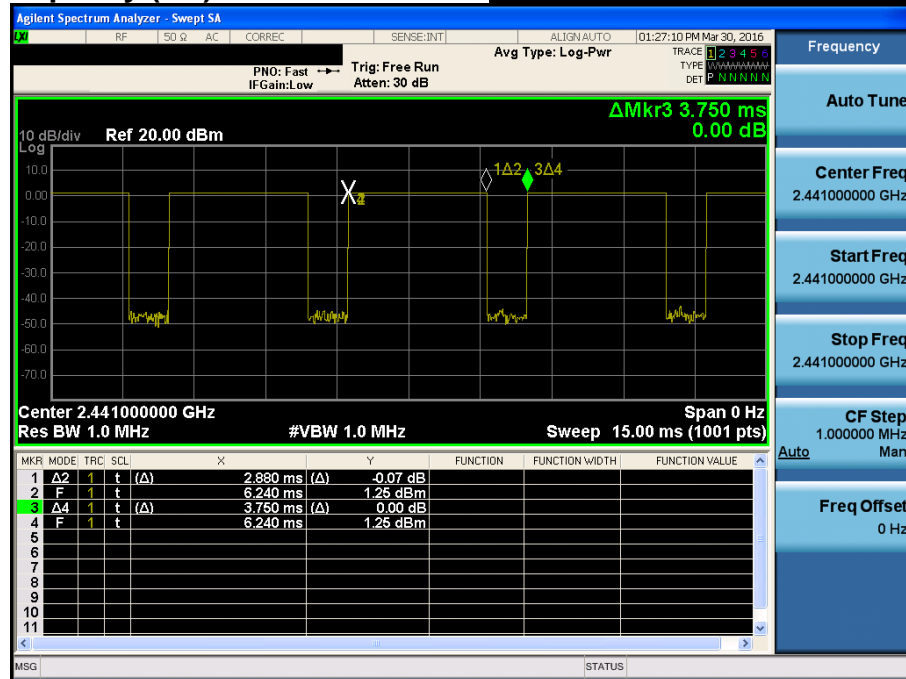
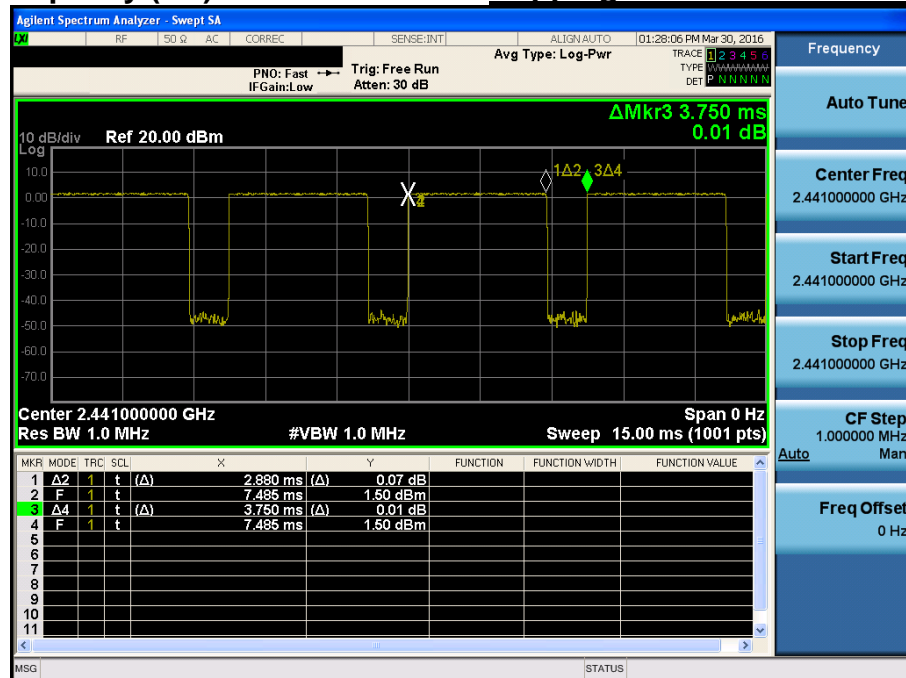
Time of Occupancy (FH)***Hopping mode : Enable & GFSK*****Time of Occupancy (FH)*****Hopping mode : Enable & $\pi/4$ -DQPSK***



Time of Occupancy (FH)

Hopping mode : Enable & 8DPSK

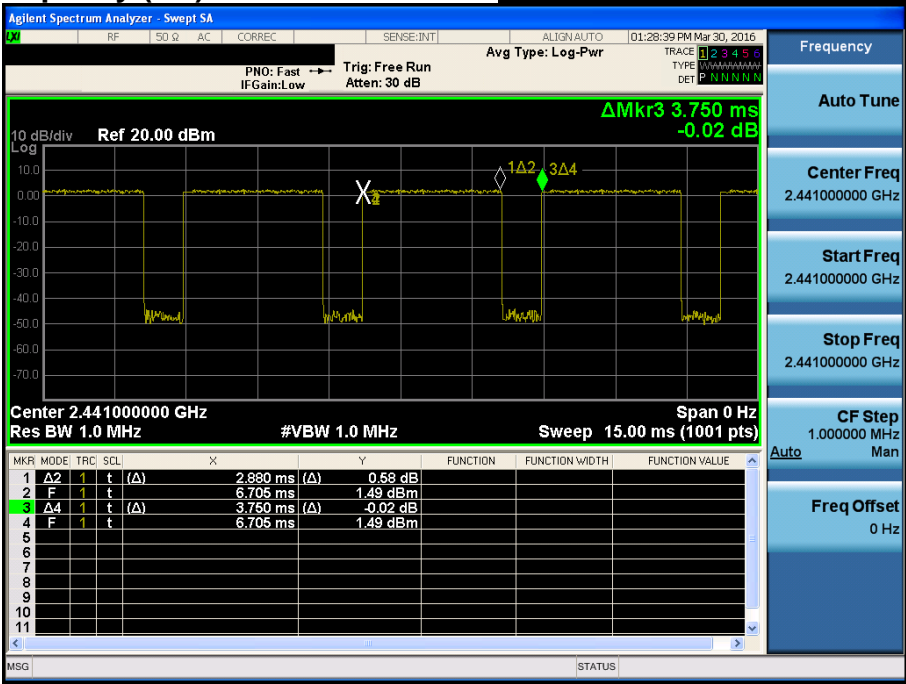


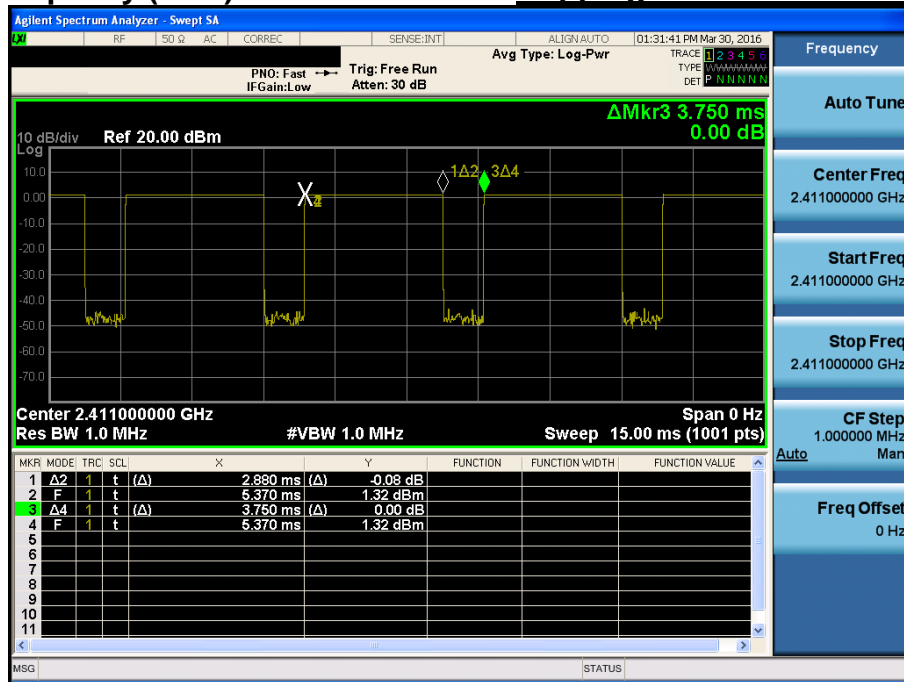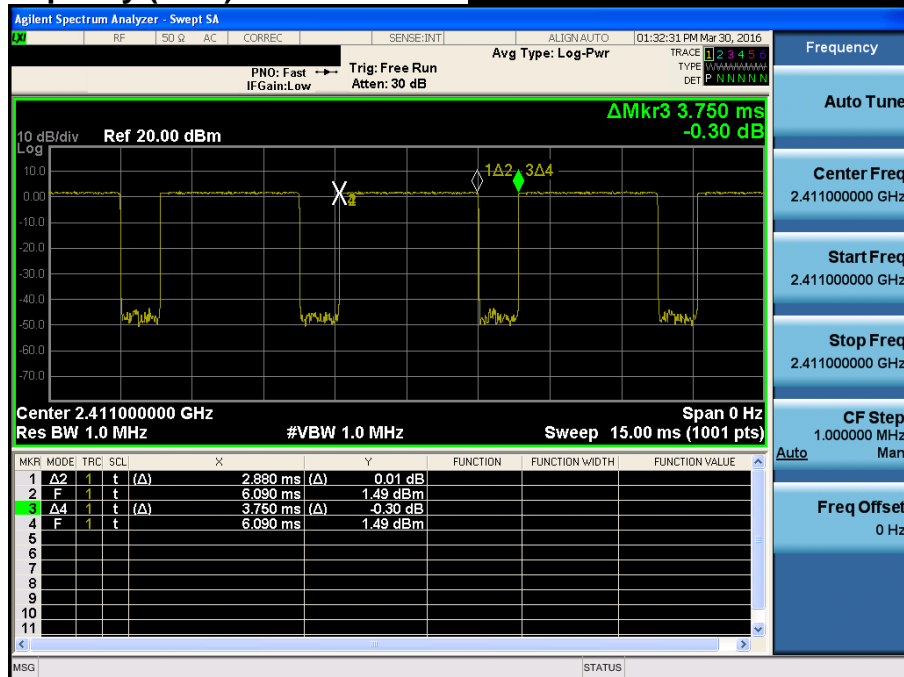Time of Occupancy (AFH)***Hopping mode : Enable & GFSK*****Time of Occupancy (AFH)*****Hopping mode : Enable & $\pi/4$ -DQPSK***



Time of Occupancy (AFH)

Hopping mode : Enable & 8DPSK

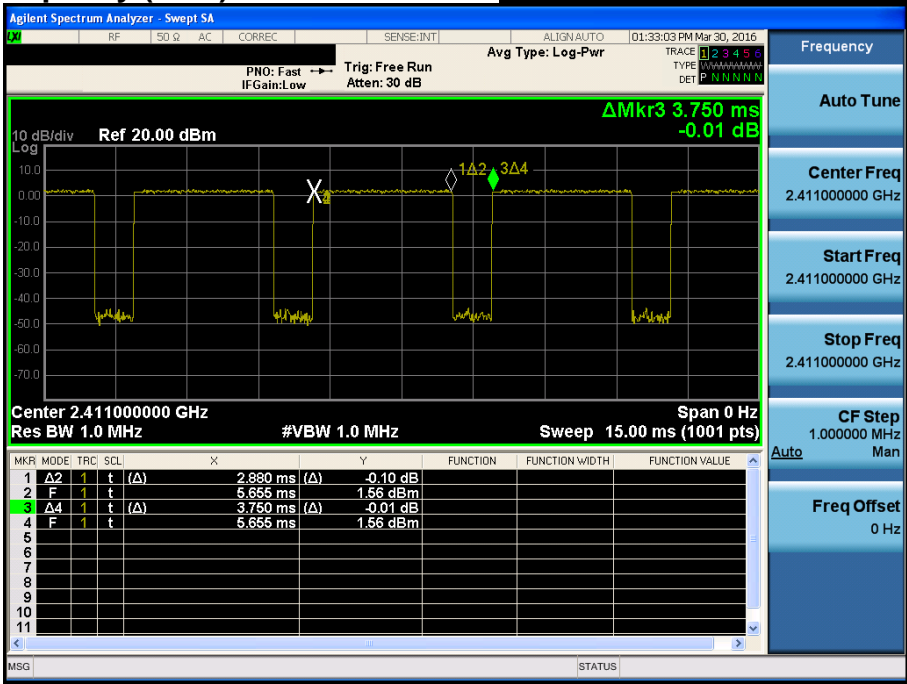

7. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission

7.1 Test Setup

Refer to the APPENDIX I.

7.2 Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1705	24000/F (kHz)	30
1705 ~ 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 - 72 MHz, 76 - 88 MHz, 174 - 216 MHz or 470 - 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

According to § 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~ 156.52525	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.7 ~ 156.9	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	162.0125 ~ 167.17	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	167.72 ~ 173.2	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	240 ~ 285	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	322 ~ 335.4	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	960 ~ 1240	3345.8 ~ 3358		
			3600 ~ 4400		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

7.3. Test Procedures

7.3.1. Test Procedures for Radiated Spurious Emissions

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 1 or 3 meter away from the interference-receiving antenna.
3. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.
4. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
6. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.

NOTE 2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.

NOTE 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz for Average detection (AV) at frequency above 1 GHz.

7.3.2. Test Procedures for Conducted Spurious Emissions

1. The transmitter output was connected to the spectrum analyzer.
2. The **reference level** of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 kHz, VBW = 300 kHz.
3. The conducted spurious emission was tested each ranges were set as below.

Frequency range : 9 kHz ~ 30 MHz

RBW = 100 kHz, VBW = 300 kHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40001

Frequency range : 30 MHz ~ 10 GHz, 10 GHz ~ 25 GHz

RBW = 1 MHz, VBW = 3 MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40001

LIMIT LINE = 20 dB below of the reference level of above measurement procedure Step 2. (RBW = 100 kHz, VBW = 300 kHz)

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2001 to get accurate emission level within 100 kHz BW.

Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.

7.3.3. Test Plot

Refer to the APPENDIX II

7.4. Test Results

7.4.1. Radiated Emissions

9 kHz ~ 25 GHz Data (Modulation : GFSK)

▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2386.74	H	X	PK	50.28	-3.03	N/A	N/A	47.25	74.00	26.75
2386.02	H	X	AV	38.17	-3.03	-24.79	N/A	10.35	54.00	43.65
4803.65	H	X	PK	43.51	6.21	N/A	N/A	49.72	74.00	24.28
4804.35	H	X	AV	30.88	6.21	-24.79	N/A	12.30	54.00	41.70

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.11	H	X	PK	42.67	6.29	N/A	N/A	48.96	74.00	25.04
4882.32	H	X	AV	30.09	6.29	-24.79	N/A	11.59	54.00	42.41

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2485.78	H	X	PK	51.34	-2.96	N/A	N/A	48.38	74.00	25.62
2485.71	H	X	AV	38.13	-2.96	-24.79	N/A	10.38	54.00	43.62
4959.50	H	X	PK	42.49	6.37	N/A	N/A	48.86	74.00	25.14
4960.11	H	X	AV	29.81	6.37	-24.79	N/A	11.39	54.00	42.61

▪ Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m.

In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = \underline{\underline{-9.54 \text{ dB}}}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

3. D.C.F Calculation. (D.C.F = Duty Cycle Correction Factor)

- Time to cycle through all channels = $\Delta t = T [\text{ms}] \times 20$ minimum hopping channels, where T = pulse width = **2.88 ms**

- $100 \text{ ms} / \Delta t [\text{ms}] = H \rightarrow$ Round up to next highest integer, to account for worst case, $H' = 100 / (2.88 \times 20) = 1.736 \approx 2$

- The Worst Case Dwell Time = $T [\text{ms}] \times H' = 2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$

- D.C.F = $20 \log(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \log(5.76 / 100) = \underline{\underline{-24.79 \text{ dB}}}$

4. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F + D.C.F / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain.

9 kHz ~ 25 GHz Data (Modulation : $\pi/4$ DQPSK)

▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2388.89	V	X	PK	49.72	-3.03	N/A	N/A	46.69	74.00	27.31
2388.47	V	X	AV	37.93	-3.03	-24.79	N/A	10.11	54.00	43.89
4804.60	V	X	PK	43.47	6.21	N/A	N/A	49.68	74.00	24.32
4804.64	V	X	AV	31.14	6.21	-24.79	N/A	12.56	54.00	41.44

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4881.70	V	X	PK	43.12	6.29	N/A	N/A	49.41	74.00	24.59
4881.80	V	X	AV	30.27	6.29	-24.79	N/A	11.77	54.00	42.23

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2486.24	V	X	PK	50.15	-2.96	N/A	N/A	47.19	74.00	26.81
2488.60	V	X	AV	38.06	-2.96	-24.79	N/A	10.31	54.00	43.69
4959.71	V	X	PK	42.90	6.37	N/A	N/A	49.27	74.00	24.73
4960.15	V	X	AV	29.86	6.37	-24.79	N/A	11.44	54.00	42.56

▪ Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m.

In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

3. D.C.F Calculation. (D.C.F = Duty Cycle Correction Factor)

- Time to cycle through all channels = $\Delta t = T [\text{ms}] \times 20$ minimum hopping channels, where T = pulse width = **2.88 ms**

- $100 \text{ ms} / \Delta t [\text{ms}] = H \rightarrow$ Round up to next highest integer, to account for worst case, $H' = 100 / (2.88 \times 20) = 1.736 \approx 2$

- The Worst Case Dwell Time = $T [\text{ms}] \times H' = 2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$

- D.C.F = $20 \log(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \log(5.76 / 100) = -24.79 \text{ dB}$

4. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F + D.C.F / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain.

9 kHz ~ 25 GHz Data (Modulation : 8DPSK)

▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2388.51	V	X	PK	50.27	-3.03	N/A	N/A	47.24	74.00	26.76
2388.92	V	X	AV	37.93	-3.03	-24.79	N/A	10.11	54.00	43.89
4804.28	V	X	PK	43.64	6.21	N/A	N/A	49.85	74.00	24.15
4804.91	V	X	AV	30.90	6.21	-24.79	N/A	12.32	54.00	41.68

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4881.49	V	X	PK	43.02	6.29	N/A	N/A	49.31	74.00	24.69
4881.71	V	X	AV	30.18	6.29	-24.79	N/A	11.68	54.00	42.32

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.95	V	X	PK	49.56	-2.96	N/A	N/A	46.60	74.00	27.40
2483.57	V	X	AV	38.92	-2.96	-24.79	N/A	11.17	54.00	42.83
4959.83	V	X	PK	42.26	6.37	N/A	N/A	48.63	74.00	25.37
4959.64	V	X	AV	29.81	6.37	-24.79	N/A	11.39	54.00	42.61

▪ Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m.

In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = \underline{-9.54 \text{ dB}}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

3. D.C.F Calculation. (D.C.F = Duty Cycle Correction Factor)

- Time to cycle through all channels = $\Delta t = T [\text{ms}] \times 20 \text{ minimum hopping channels}$, where $T = \text{pulse width} = 2.88 \text{ ms}$

- $100 \text{ ms} / \Delta t [\text{ms}] = H \rightarrow \text{Round up to next highest integer, to account for worst case, } H' = 100 / (2.88 \times 20) = 1.736 \approx 2$

- The Worst Case Dwell Time = $T [\text{ms}] \times H' = 2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$

- D.C.F = $20 \log(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \log(5.76 / 100) = \underline{-24.79 \text{ dB}}$

4. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F + D.C.F / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain.

9 kHz ~ 25 GHz Data (*Hopping mode*)

▪ Modulation : GFSK

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2386.64	H	X	PK	50.68	-3.03	N/A	N/A	47.65	74.00	26.35
2386.02	H	X	AV	38.17	-3.03	-24.79	N/A	10.35	54.00	43.65
2486.19	H	X	PK	47.10	-2.96	N/A	N/A	44.14	74.00	29.86
2486.05	H	X	AV	37.22	-2.96	-24.79	N/A	9.47	54.00	44.53

▪ Modulation : $\pi/4$ DQPSK

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2388.84	V	X	PK	50.91	-3.03	N/A	N/A	47.88	74.00	26.12
2387.93	V	X	AV	37.94	-3.03	-24.79	N/A	10.12	54.00	43.88
2489.14	V	X	PK	50.88	-2.96	N/A	N/A	47.92	74.00	26.08
2486.85	V	X	AV	40.05	-2.96	-24.79	N/A	12.30	54.00	41.70

▪ Modulation : 8DPSK

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.01	V	X	PK	51.36	-3.03	N/A	N/A	48.33	74.00	25.67
2388.92	V	X	AV	37.93	-3.03	-24.79	N/A	10.11	54.00	43.89
2487.03	V	X	PK	51.62	-2.96	N/A	N/A	48.66	74.00	25.34
2490.63	V	X	AV	39.86	-2.96	-24.79	N/A	12.11	54.00	41.89

▪ Note

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m.

In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = \underline{\underline{-9.54 \text{ dB}}}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

3. D.C.F Calculation. (D.C.F = Duty Cycle Correction Factor)

- Time to cycle through all channels = $\Delta t = T [\text{ms}] \times 20$ minimum hopping channels, where T = pulse width = **2.88 ms**

- $100 \text{ ms} / \Delta t [\text{ms}] = H \rightarrow$ Round up to next highest integer, to account for worst case, $H' = 100 / (2.88 \times 20) = 1.736 \approx 2$

- The Worst Case Dwell Time = $T [\text{ms}] \times H' = 2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$

- D.C.F = $20 \log(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \log(5.76 / 100) = \underline{\underline{-24.79 \text{ dB}}}$

4. Sample Calculation.


Margin = Limit – Result / Result = Reading + T.F + D.C.F / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain.

7.4.2. Conducted Spurious Emissions

Low Band-edge



Lowest Channel & Modulation : GFSK

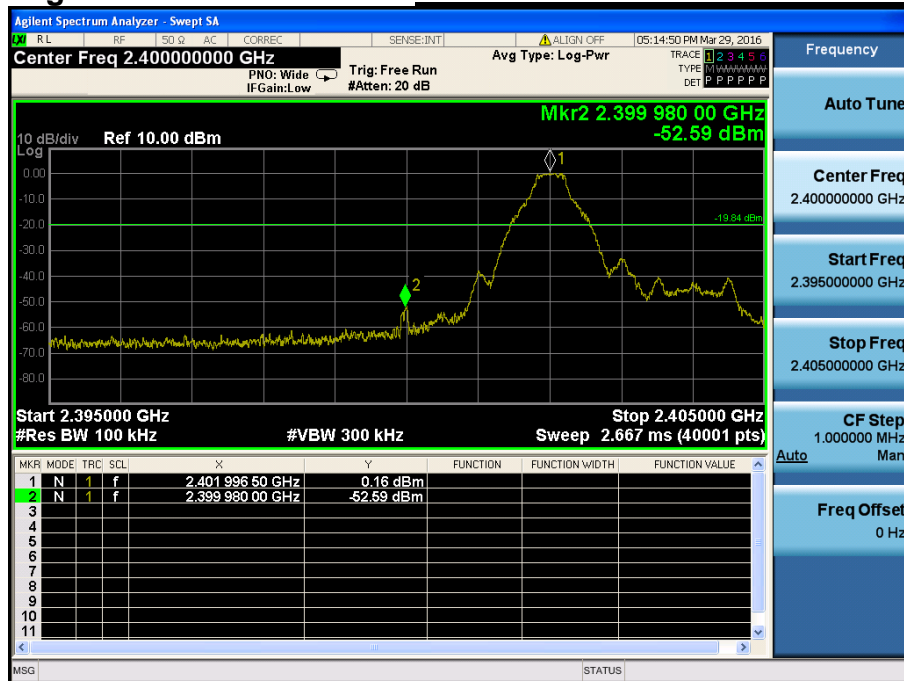

Low Band-edge


Hopping mode & Modulation : GFSK

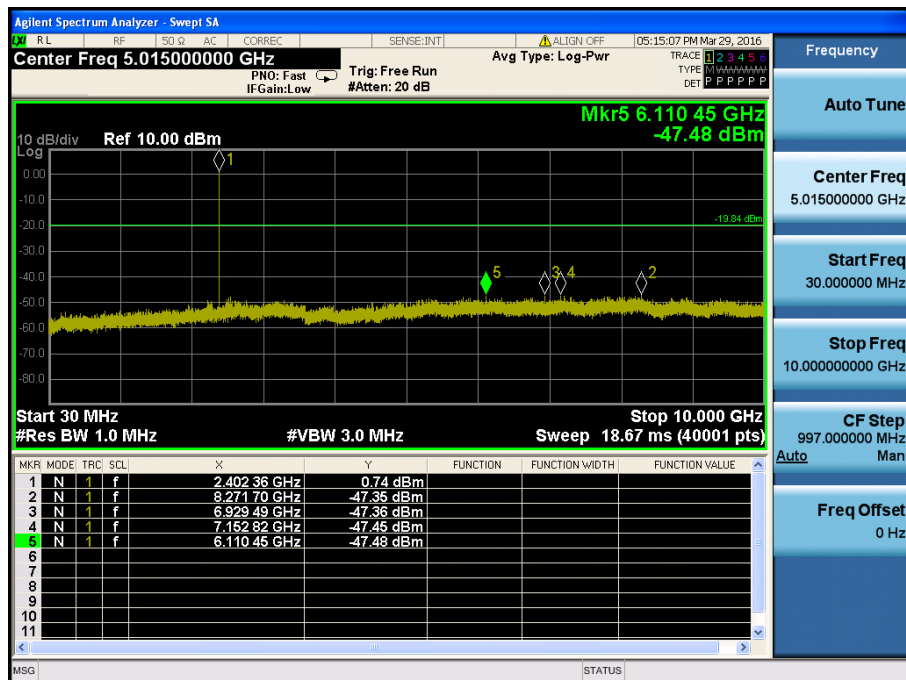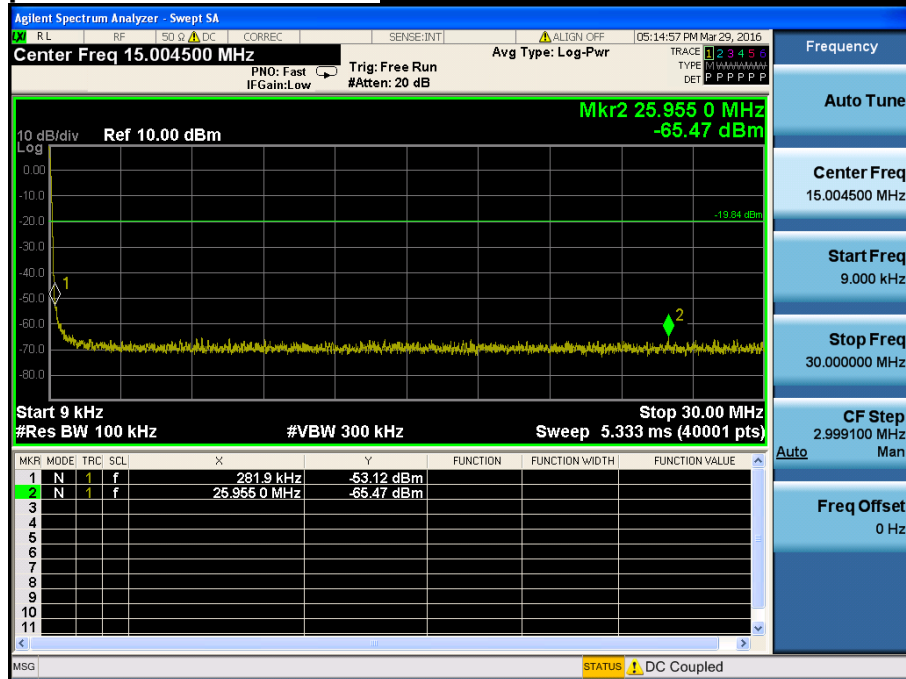


Conducted Spurious Emissions***Lowest Channel & Modulation : GFSK***




Conducted Spurious Emissions Lowest Channel & Modulation : GFSK

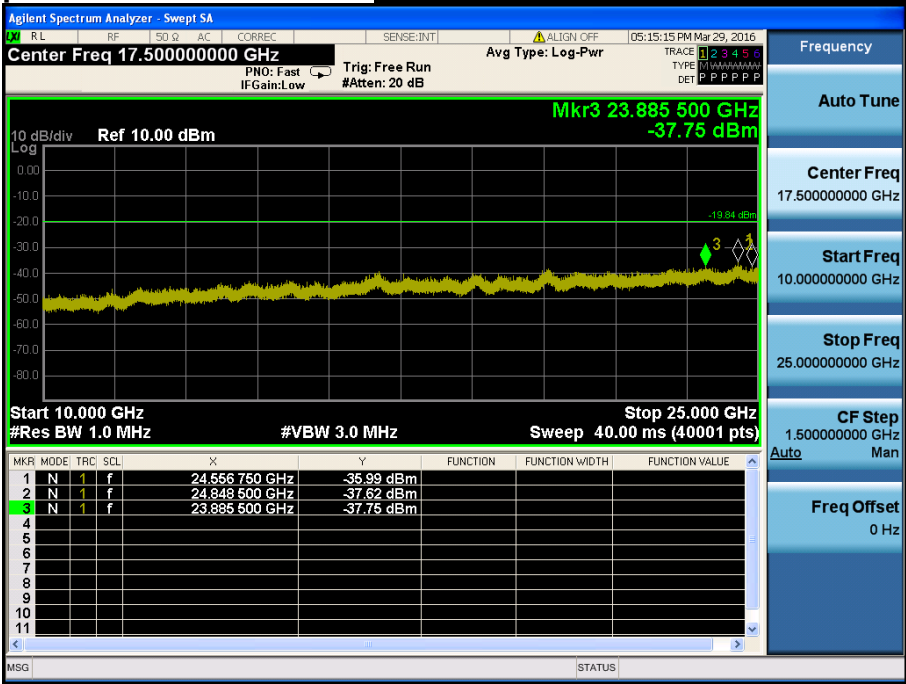

Reference for limit


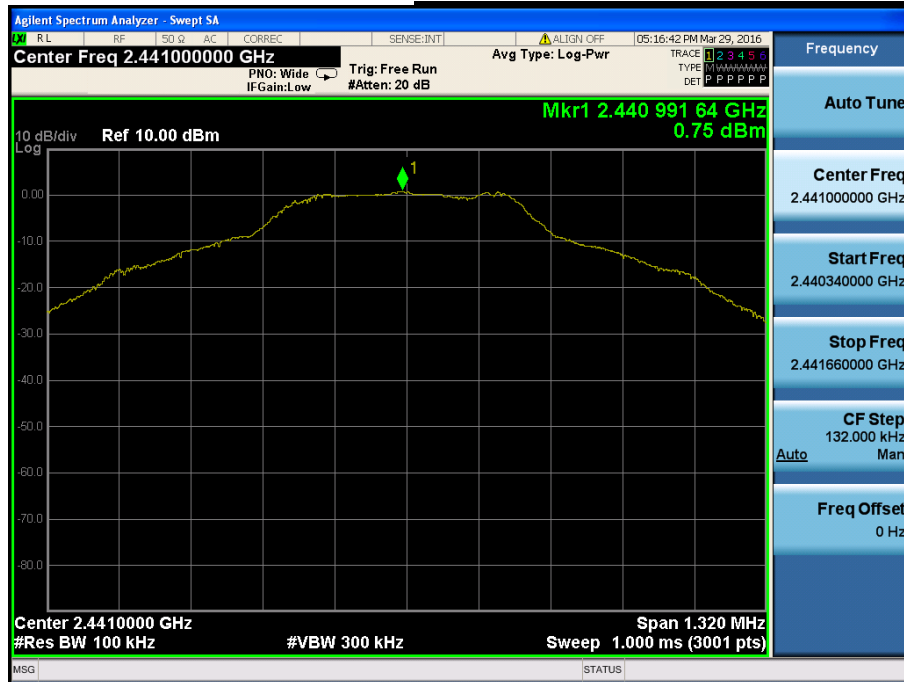
Middle Channel & Modulation : GFSK

Conducted Spurious Emissions

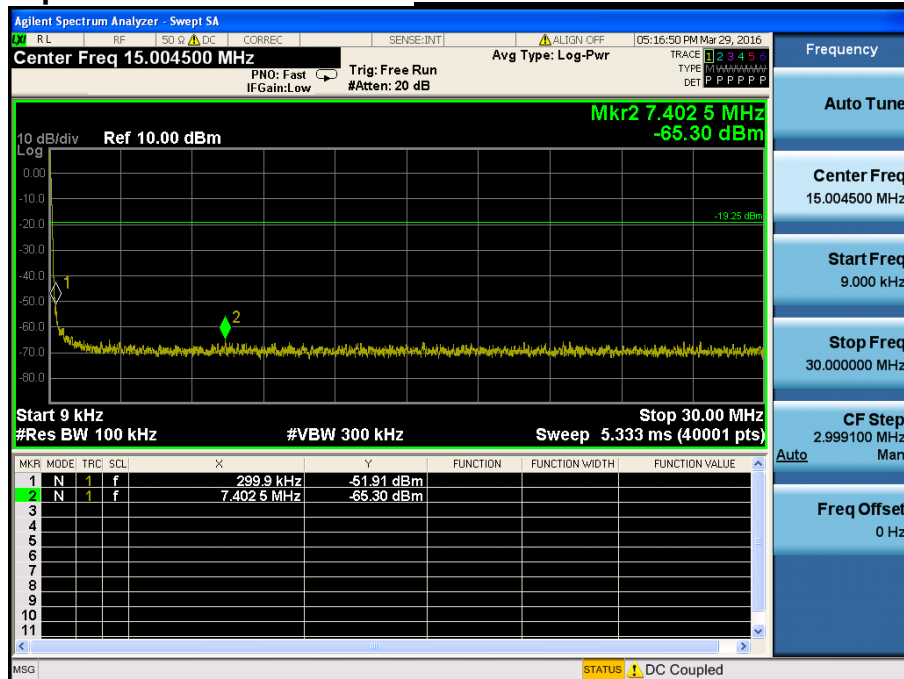Middle Channel & Modulation : GFSK

Conducted Spurious Emissions


Middle Channel & Modulation : GFSK

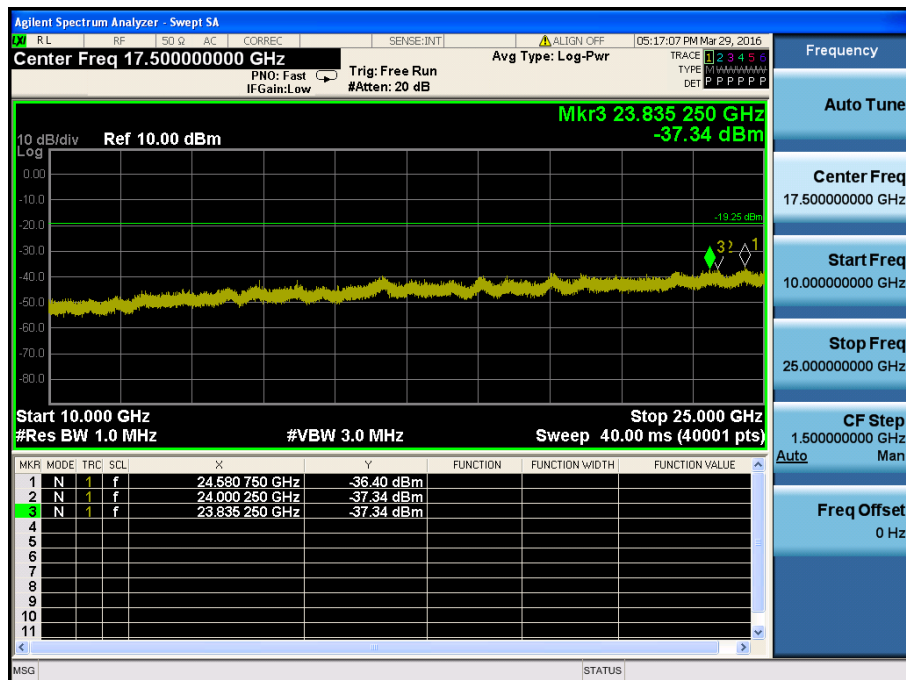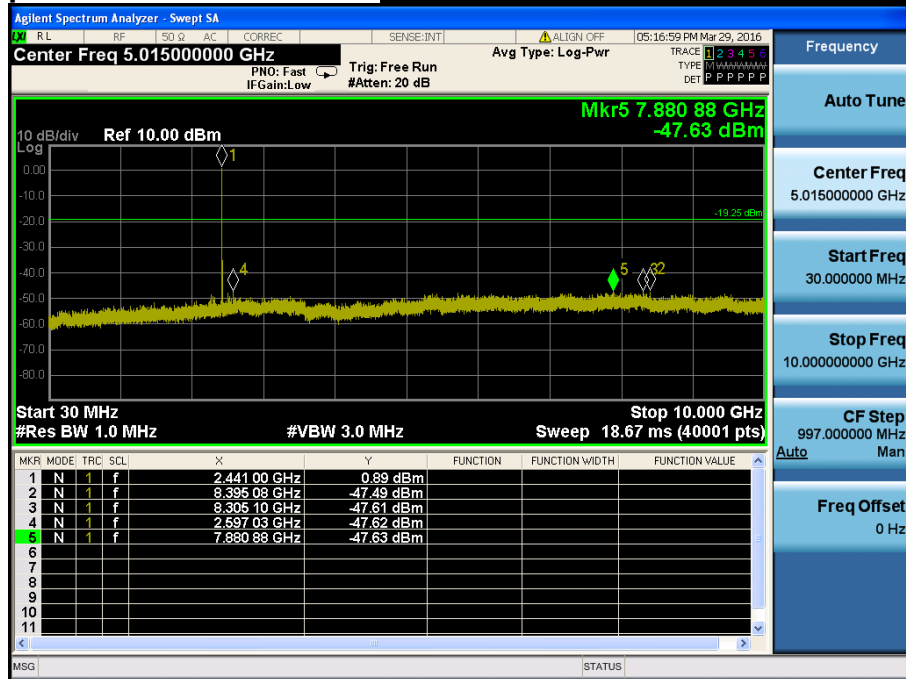



High Band-edge



Highest Channel & Modulation : GFSK

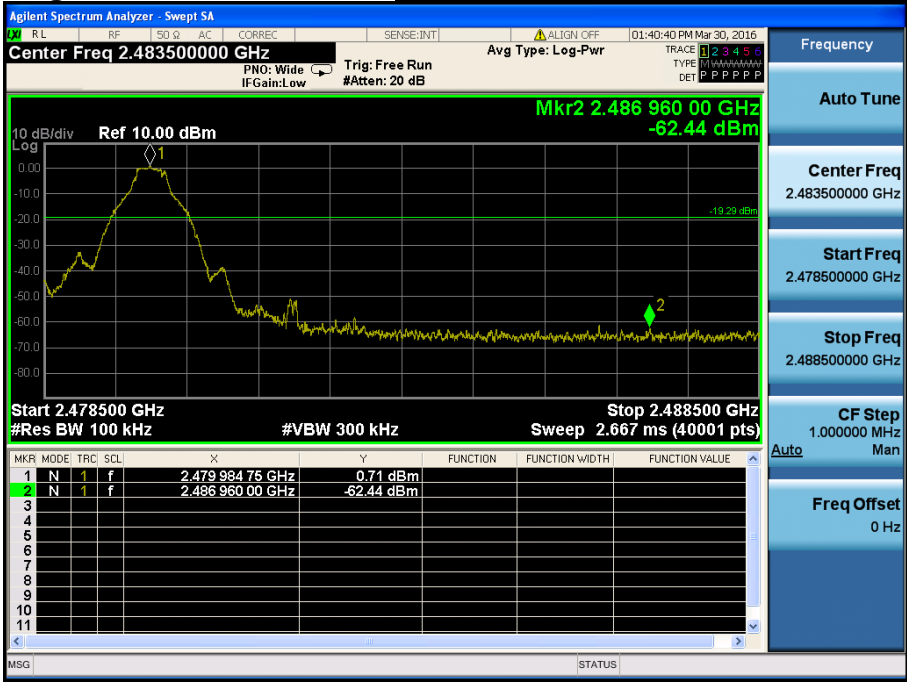

High Band-edge


Hopping mode & Modulation : GFSK

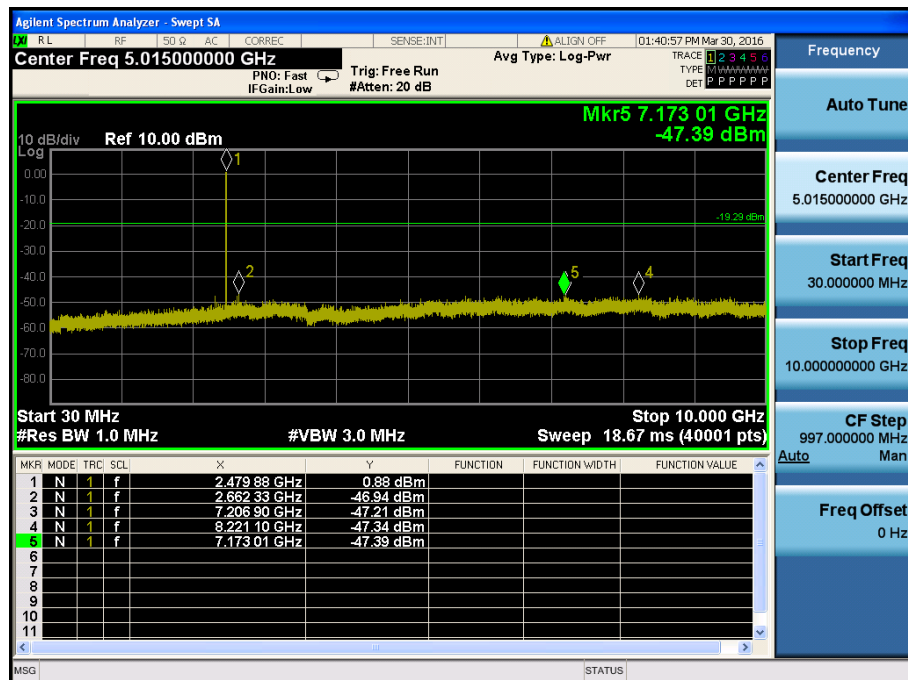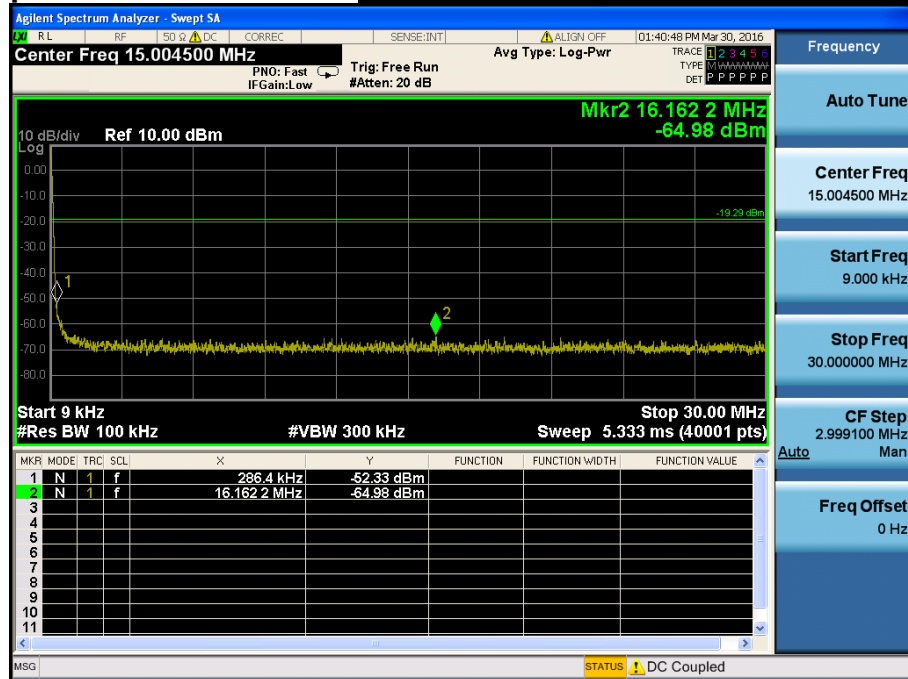


Conducted Spurious Emissions *Highest Channel & Modulation : GFSK*



Conducted Spurious Emissions *Highest Channel & Modulation : GFSK*


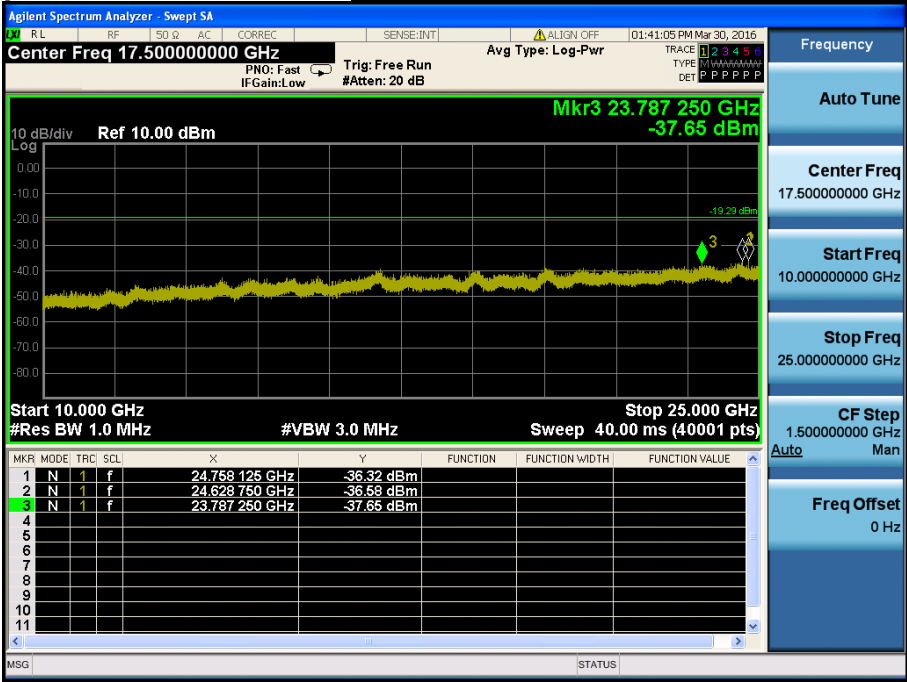


Low Band-edge

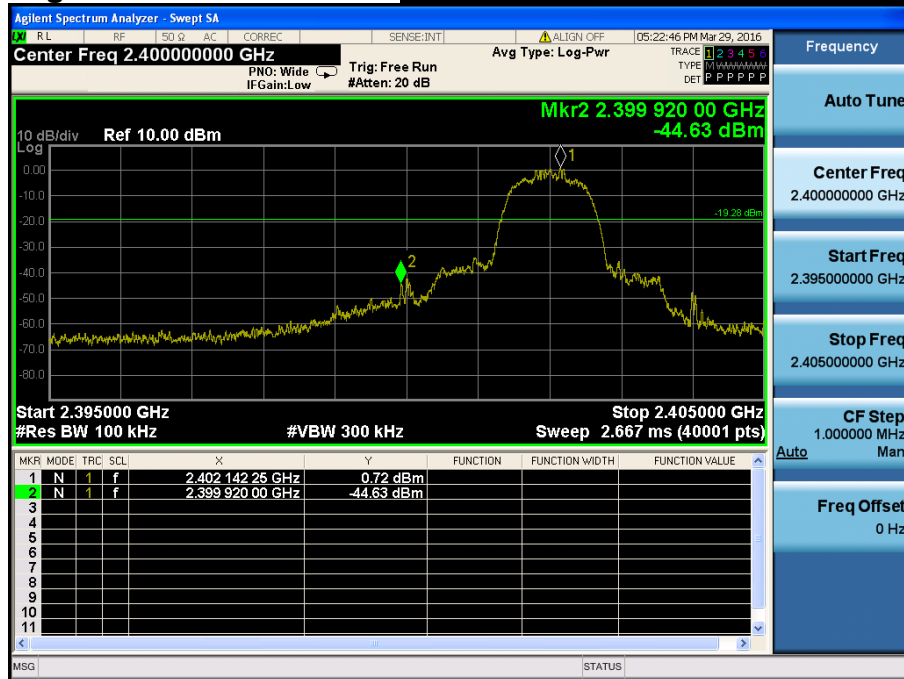Lowest Channel & Modulation : $\pi/4$ DQPSK


Low Band-edge

Hopping mode & Modulation : $\pi/4$ DQPSK

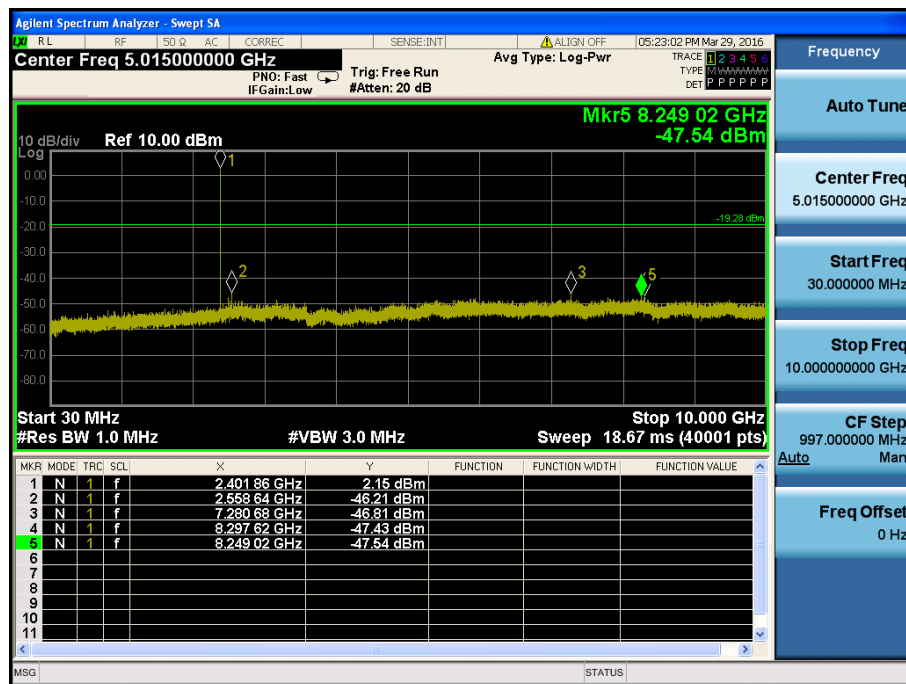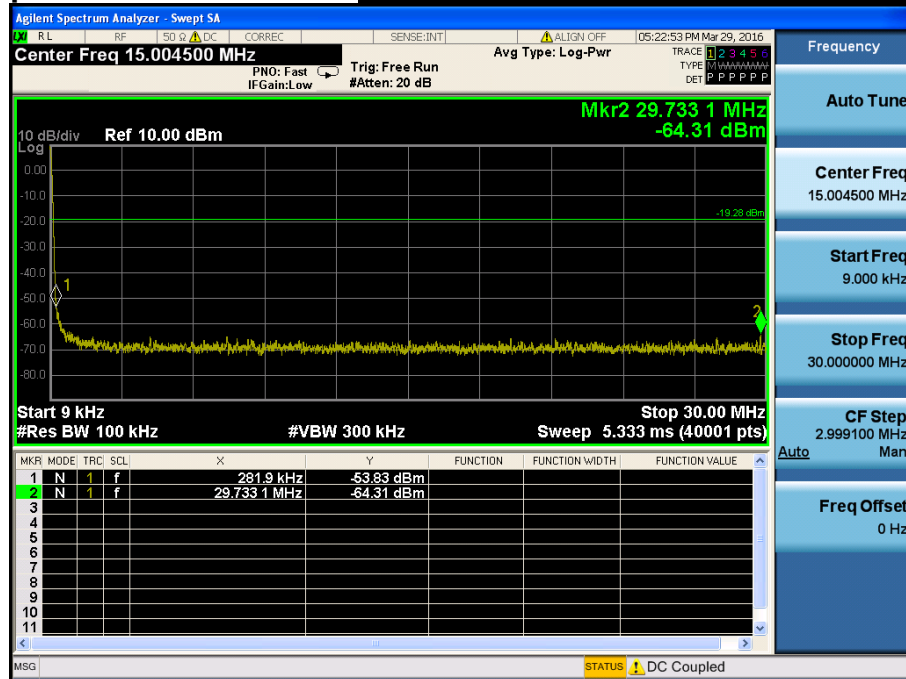
Conducted Spurious Emissions ***Lowest Channel & Modulation : $\pi/4$ DQPSK***




Conducted Spurious Emissions Lowest Channel & Modulation : $\pi/4$ DQPSK

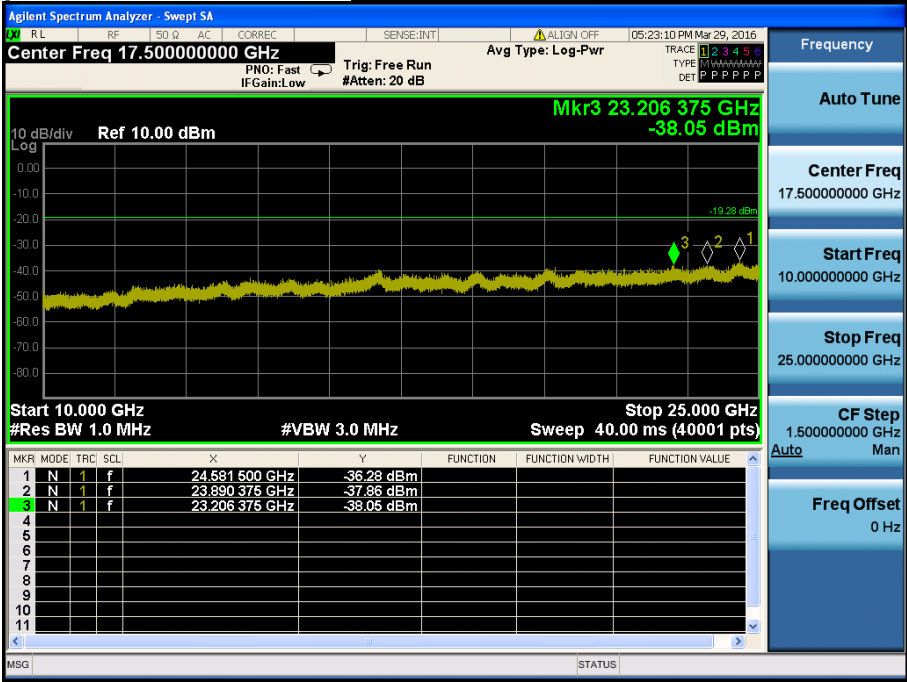



Reference for limit


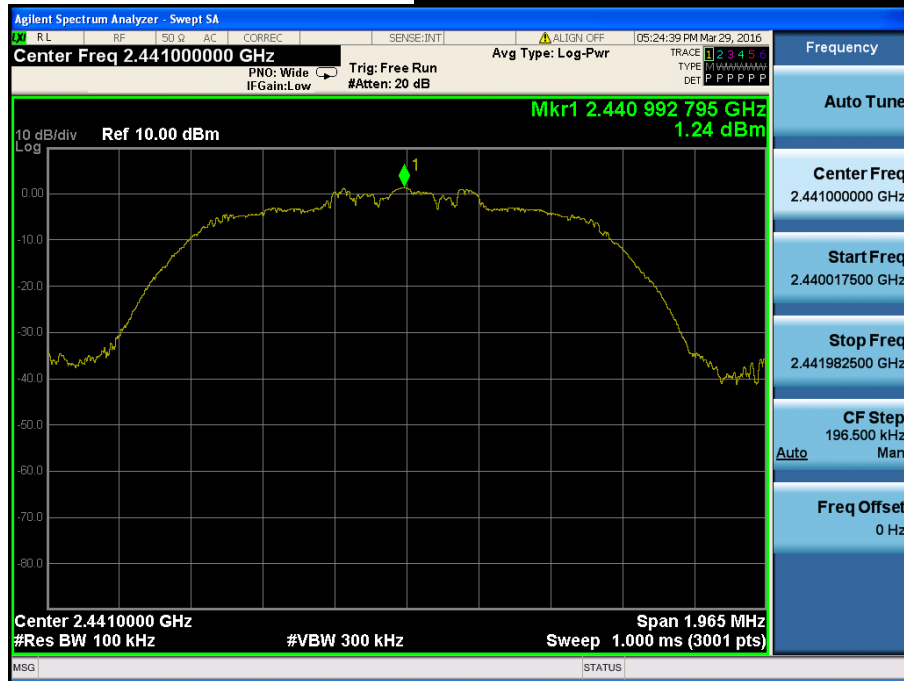
Middle Channel & Modulation : $\pi/4$ DQPSK

Conducted Spurious Emissions


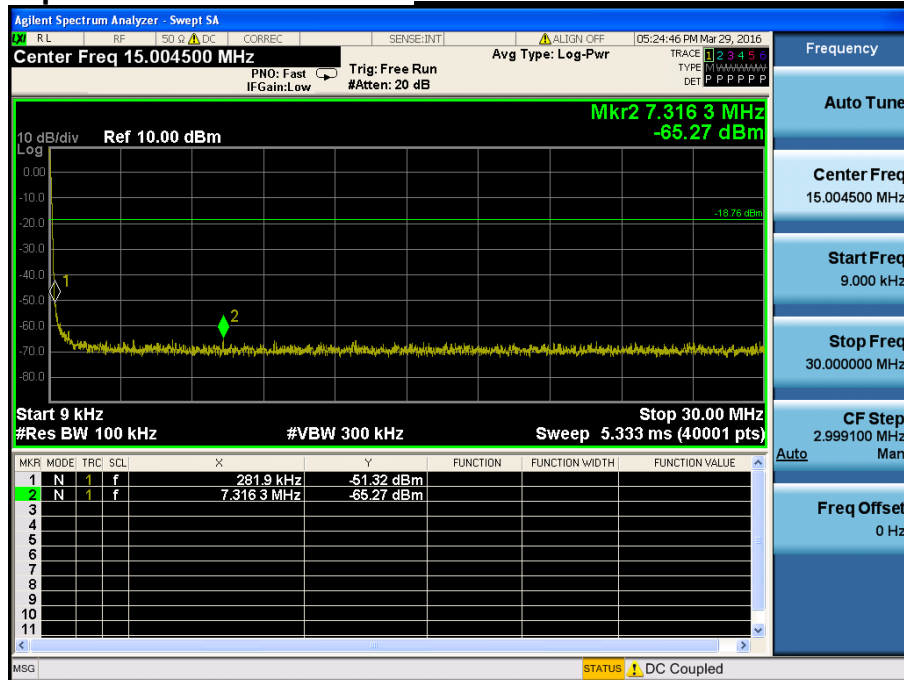
Middle Channel & Modulation : $\pi/4$ DQPSK

Conducted Spurious Emissions

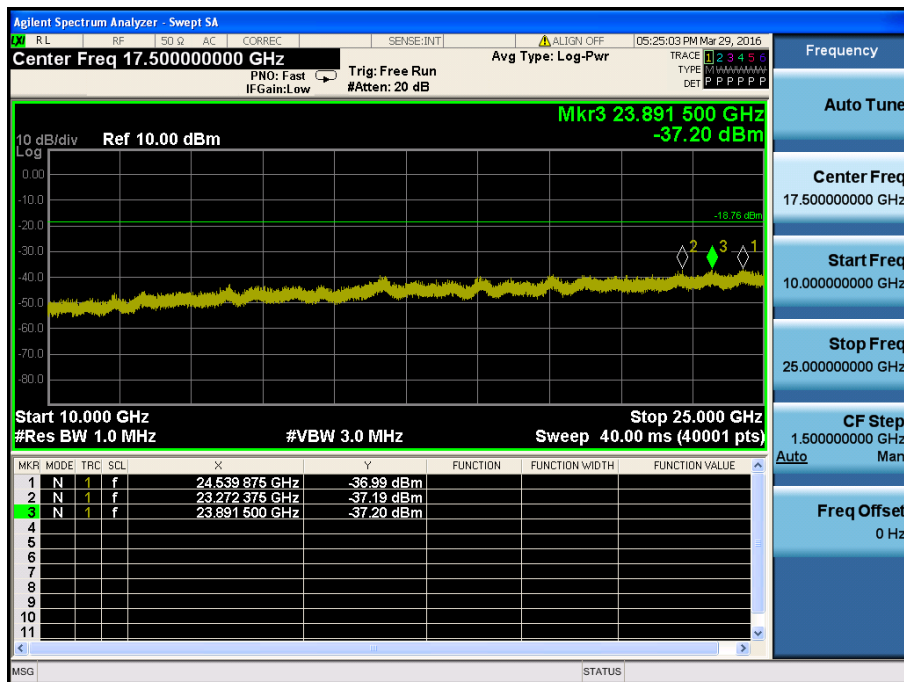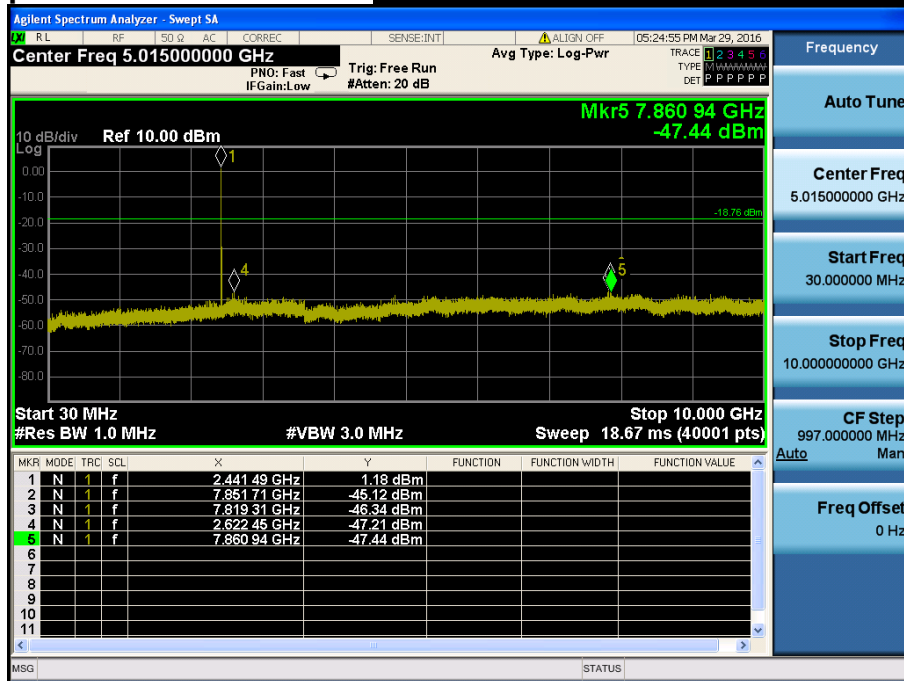Middle Channel & Modulation : $\pi/4$ DQPSK

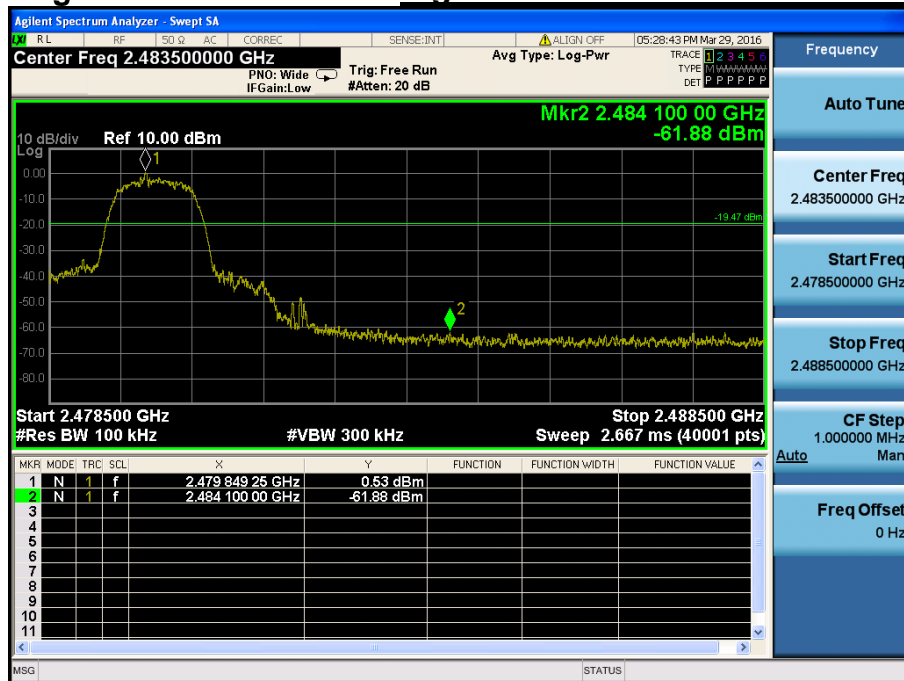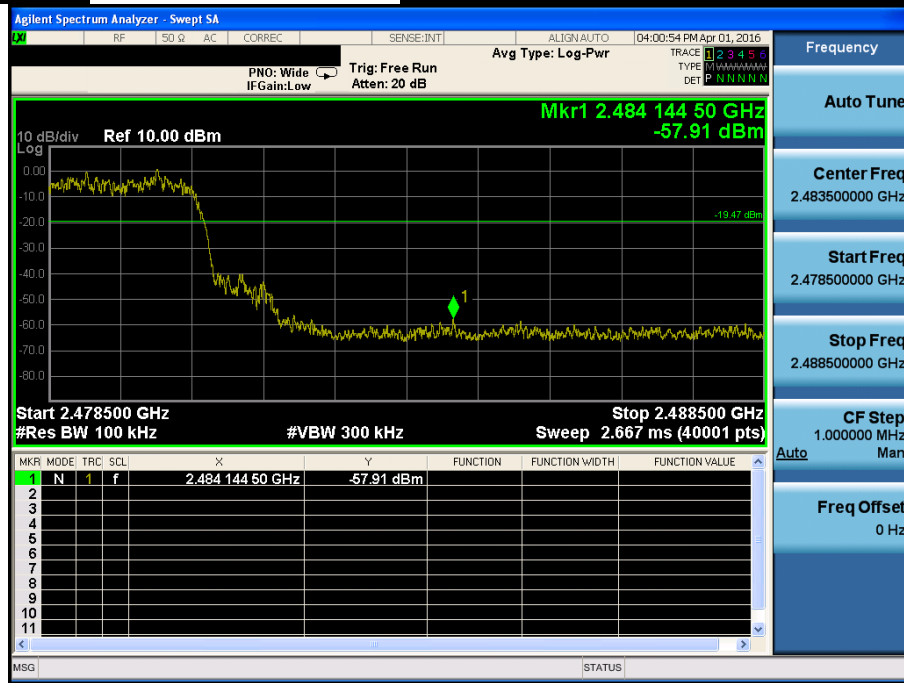
High Band-edge***Highest Channel & Modulation : $\pi/4$ DQPSK*****High Band-edge*****Hopping mode & Modulation : $\pi/4$ DQPSK***

Conducted Spurious Emissions

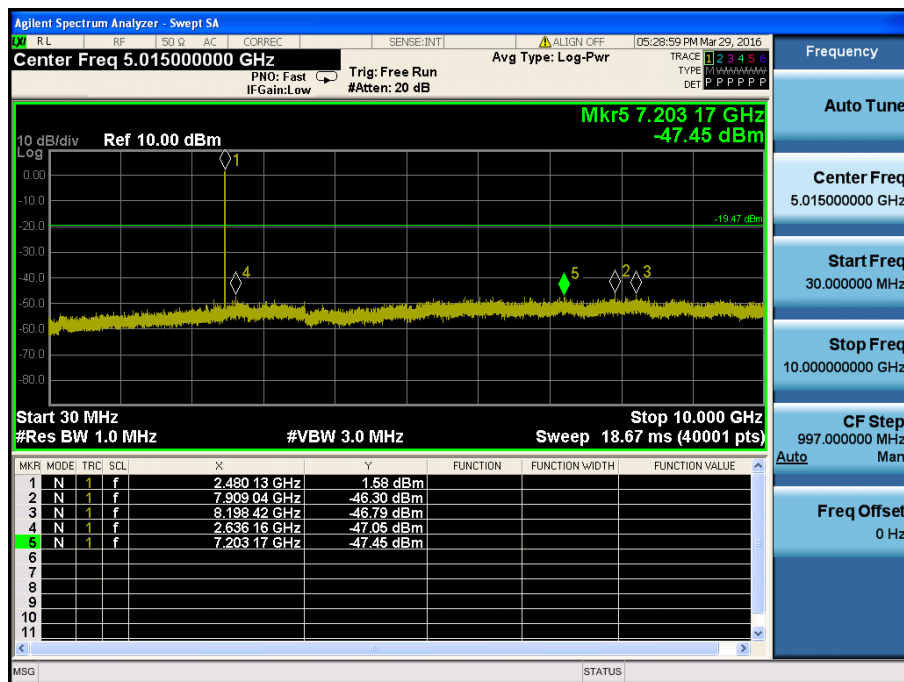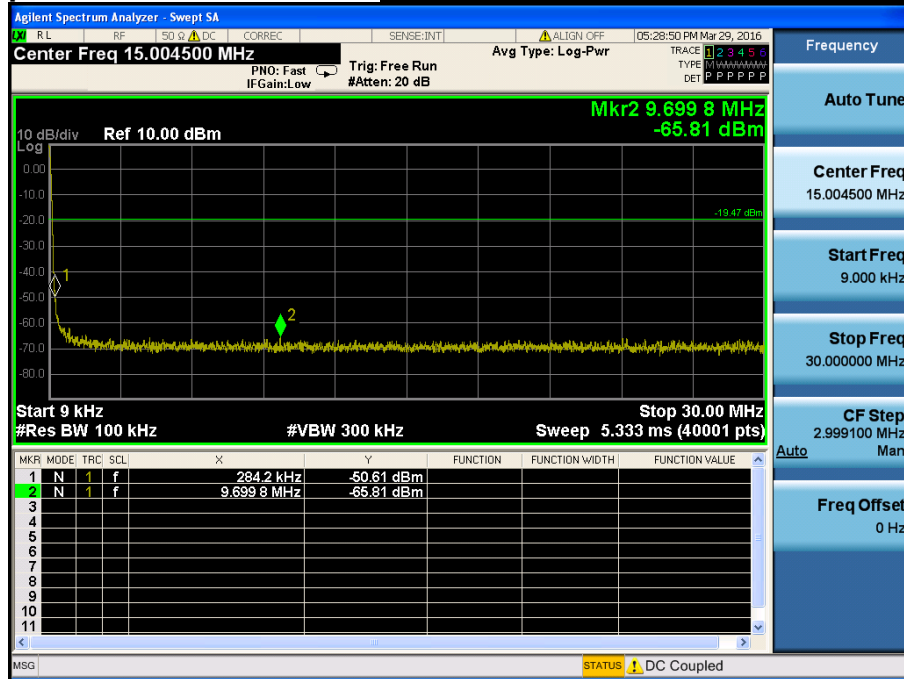
Highest Channel & Modulation : $\pi/4$ DQPSK




Conducted Spurious Emissions *Highest Channel & Modulation : $\pi/4$ DQPSK*


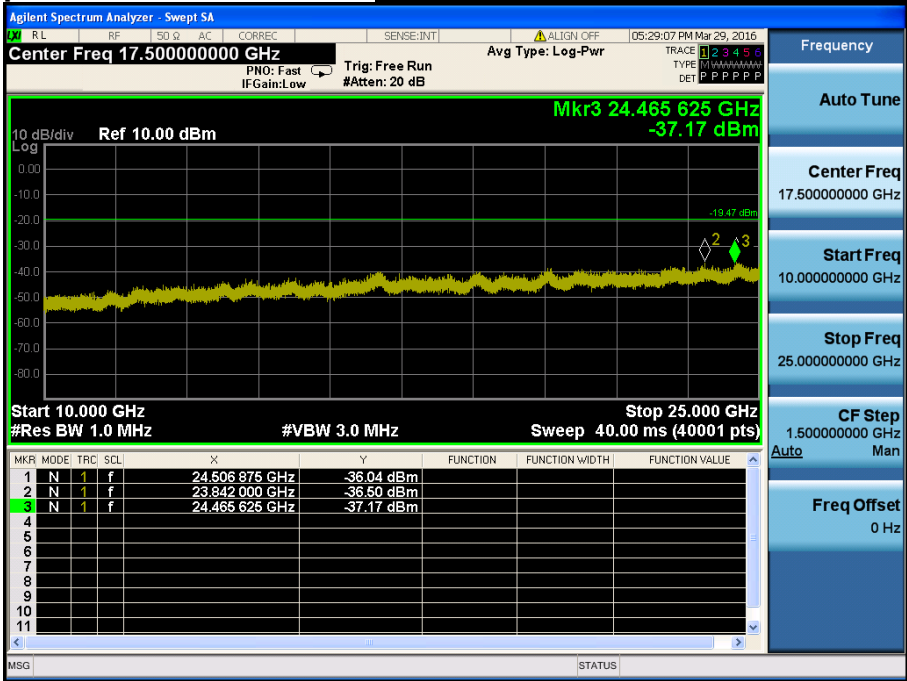


Low Band-edge

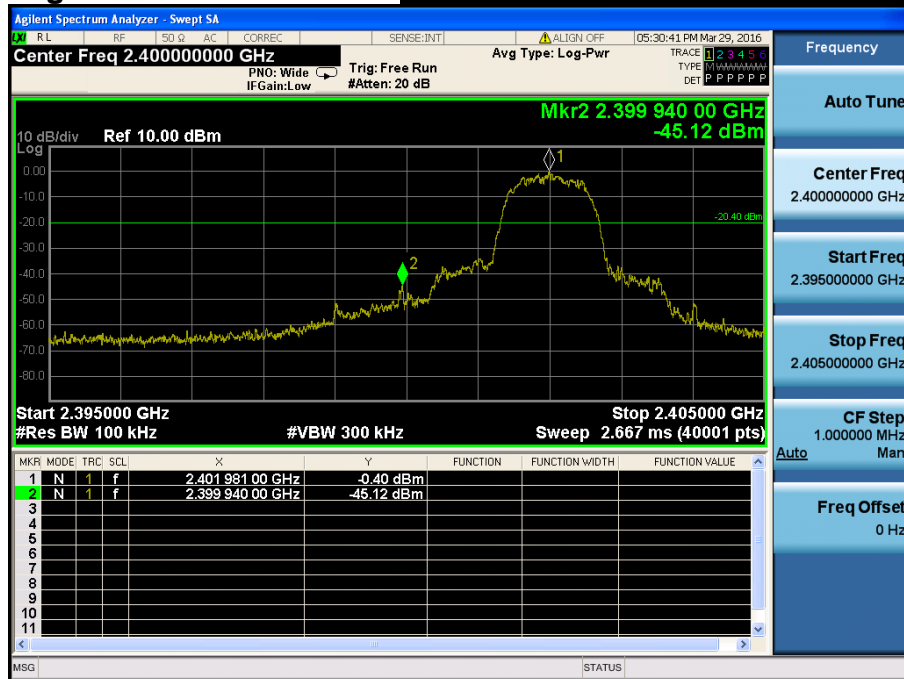Lowest Channel & Modulation : 8DPSK


Low Band-edge

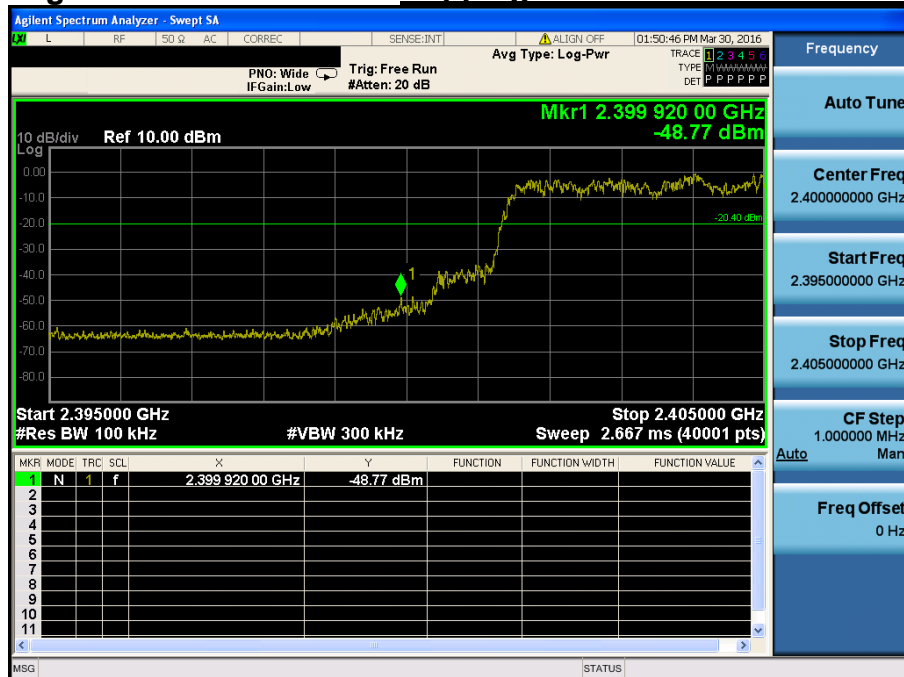Hopping mode & Modulation : 8DPSK

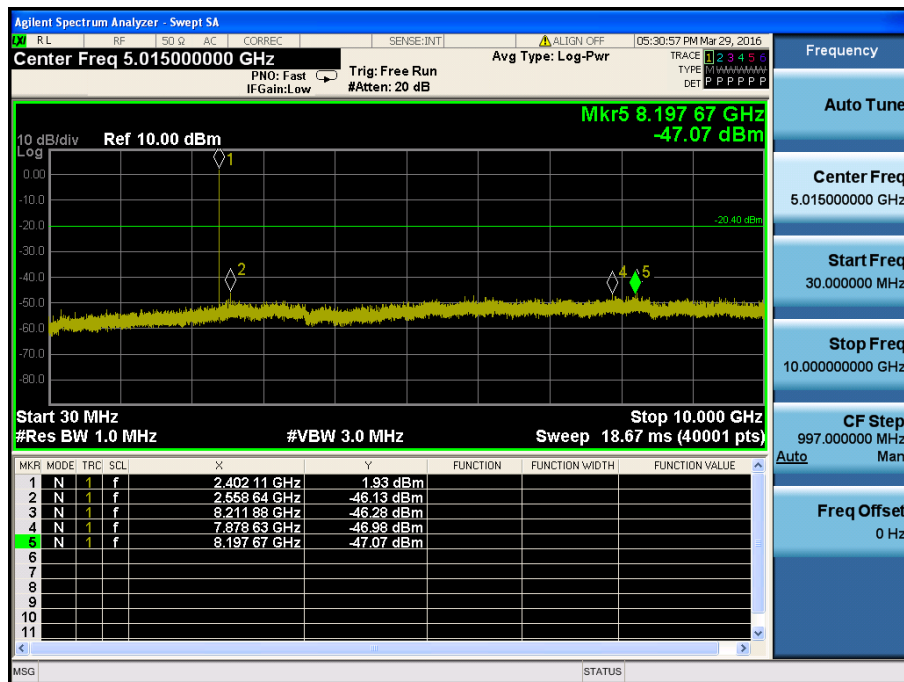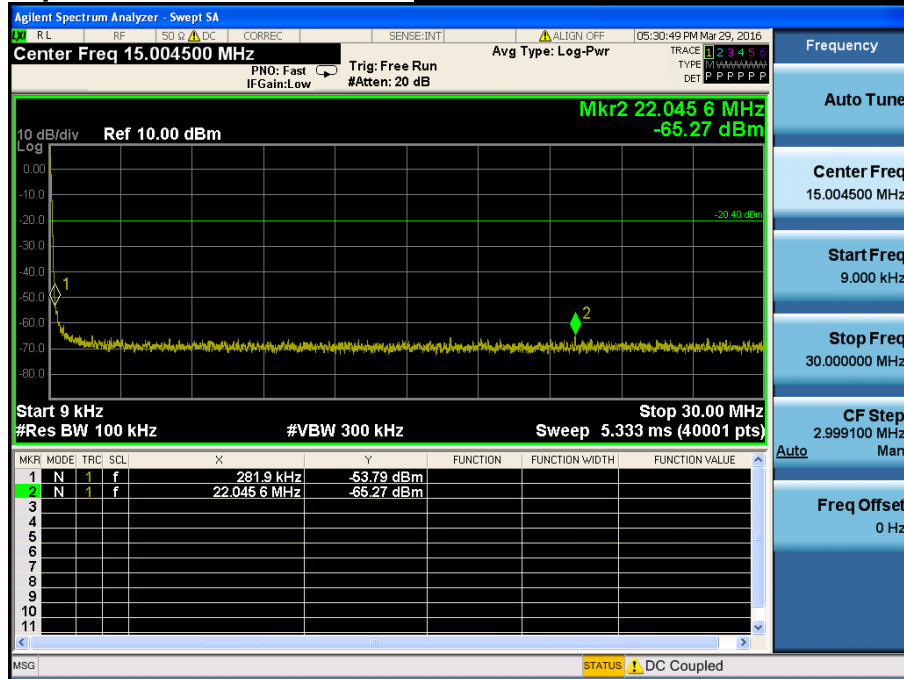
Conducted Spurious Emissions***Lowest Channel & Modulation : 8DPSK***




Conducted Spurious Emissions *Lowest Channel & Modulation : 8DPSK*

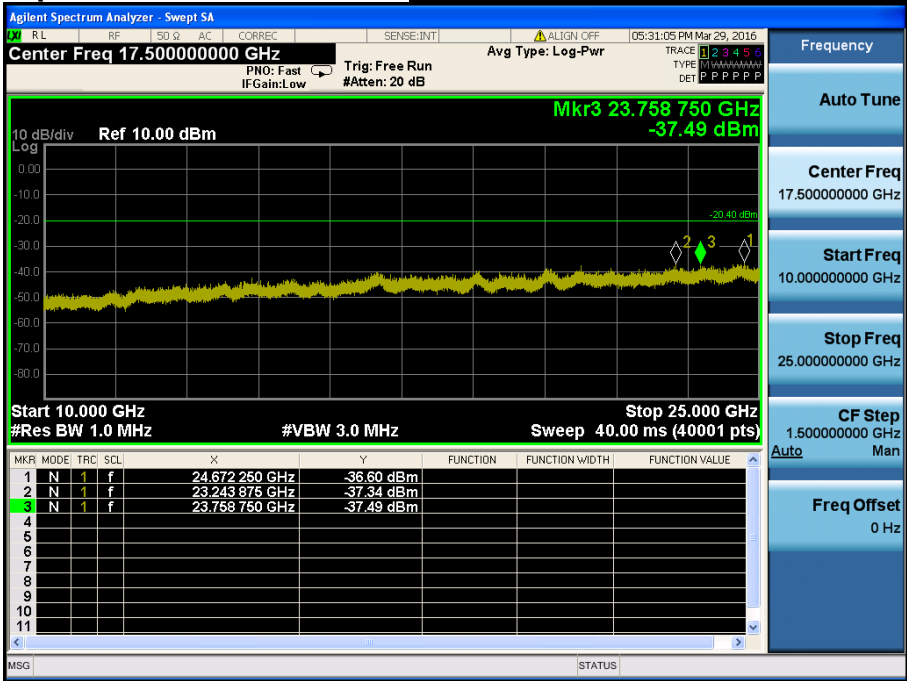

Reference for limit


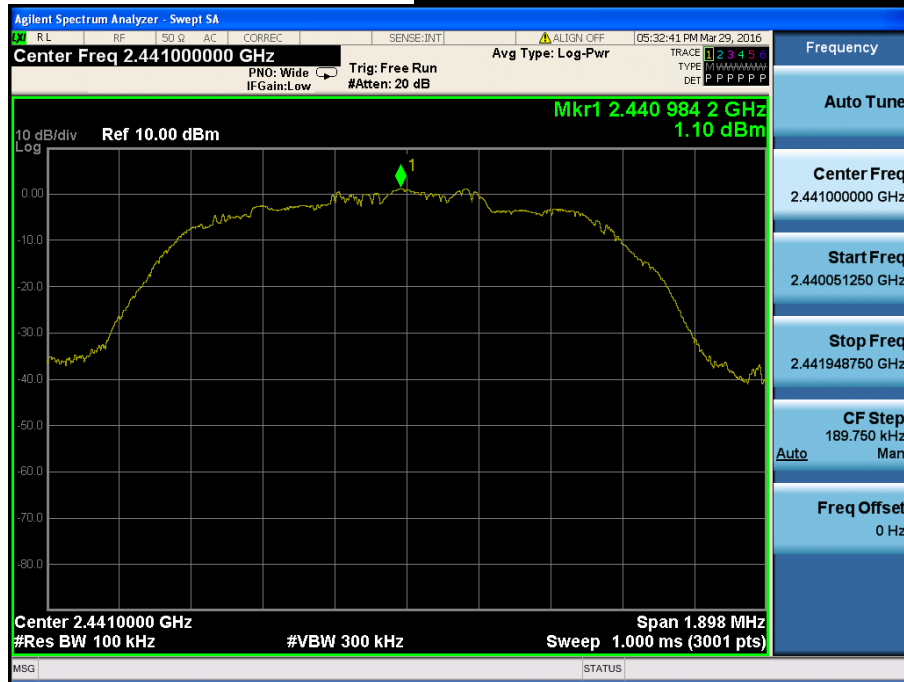
Middle Channel & Modulation : 8DPSK



Conducted Spurious Emissions


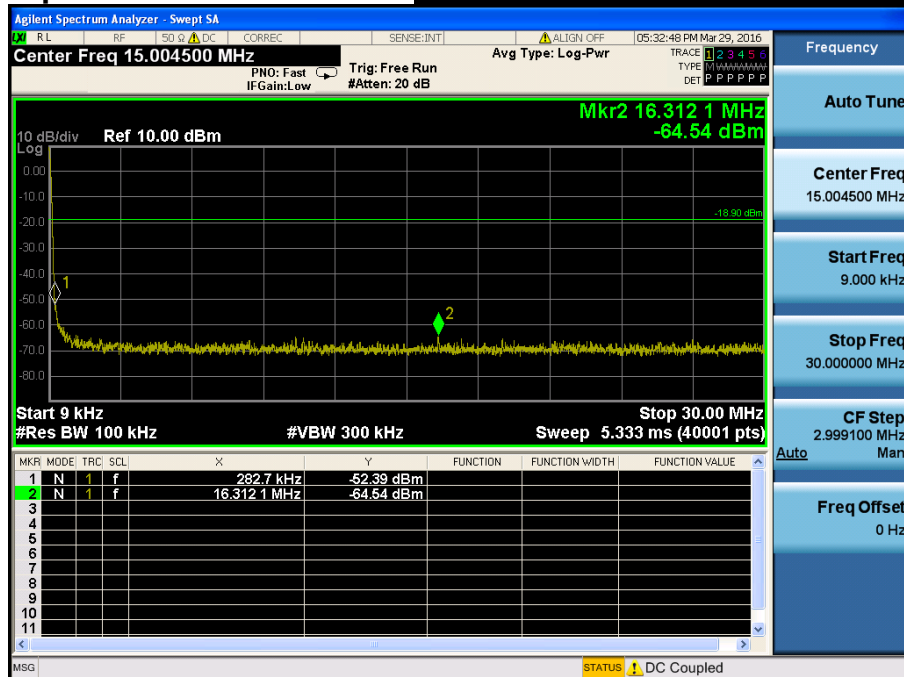
Middle Channel & Modulation : 8DPSK

Conducted Spurious Emissions

Middle Channel & Modulation : 8DPSK

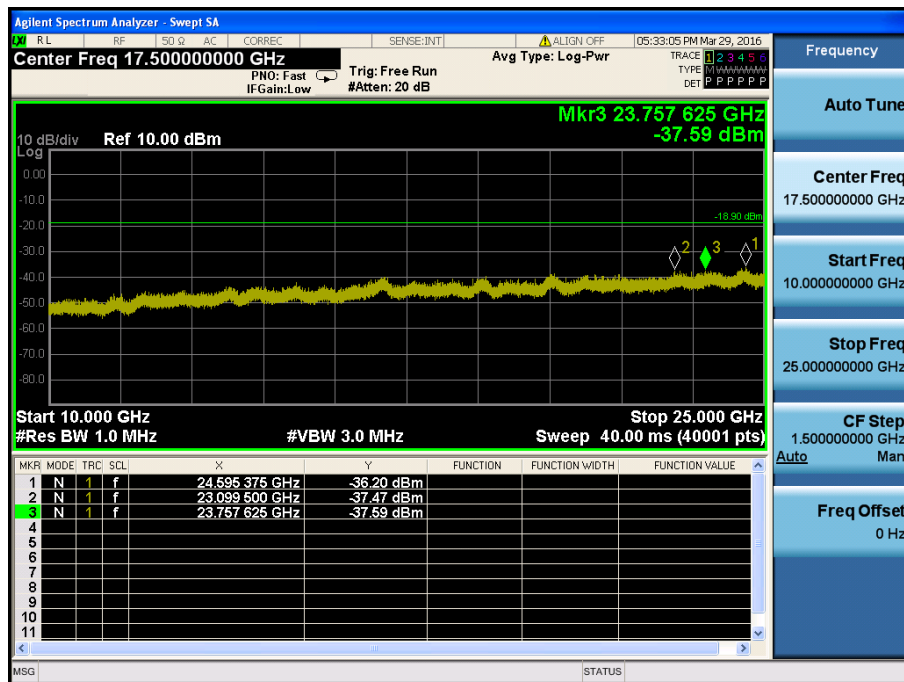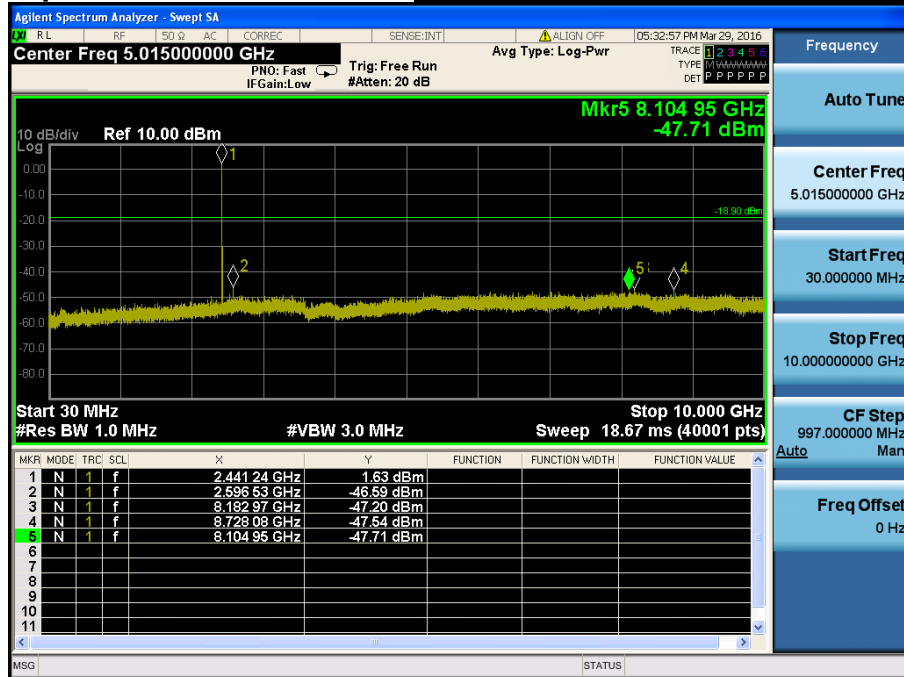


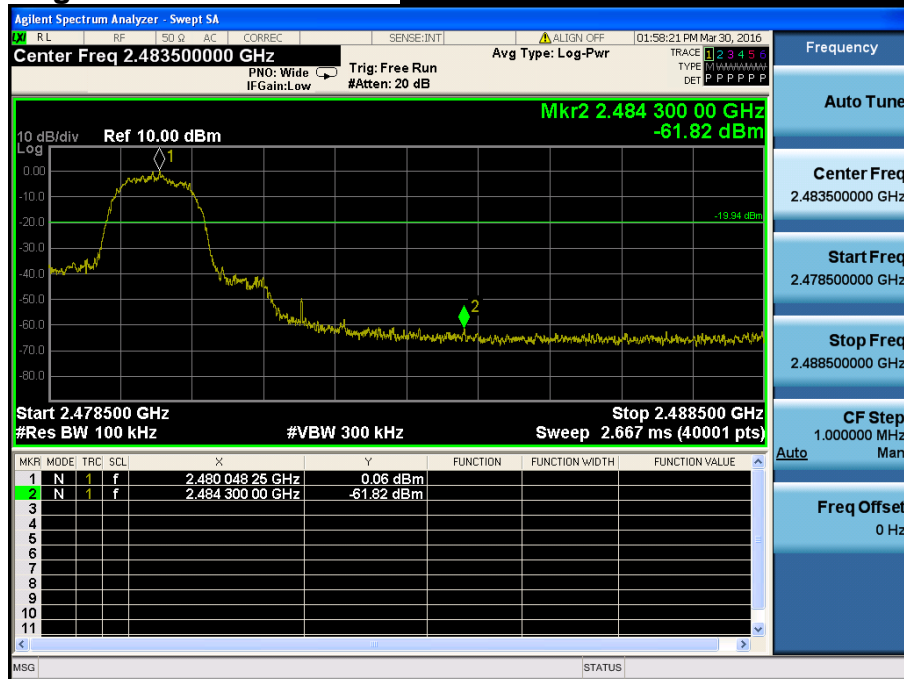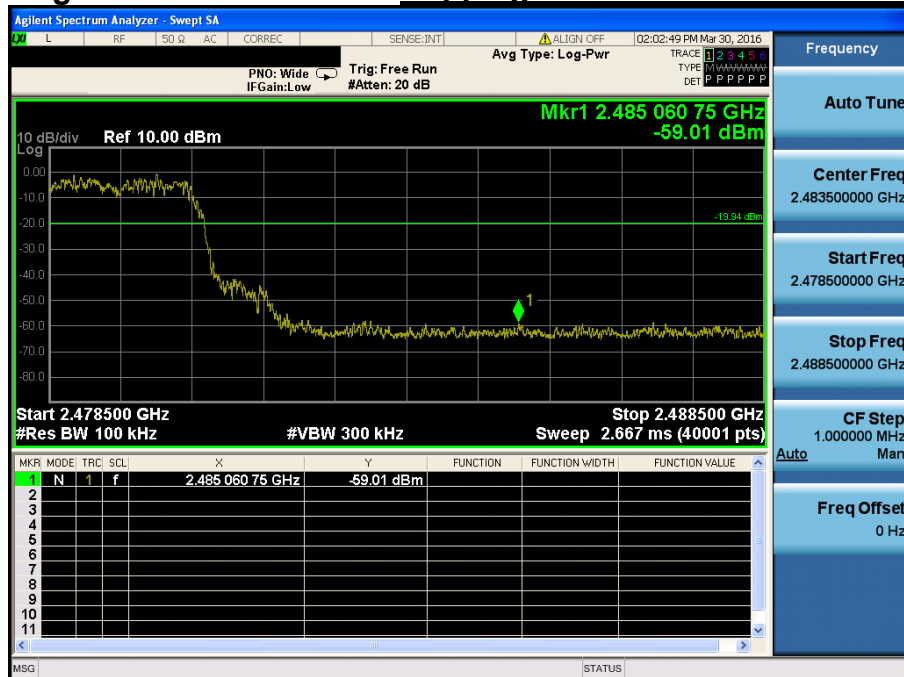High Band-edge***Highest Channel & Modulation : 8DPSK*****High Band-edge*****Hopping mode & Modulation : 8DPSK***

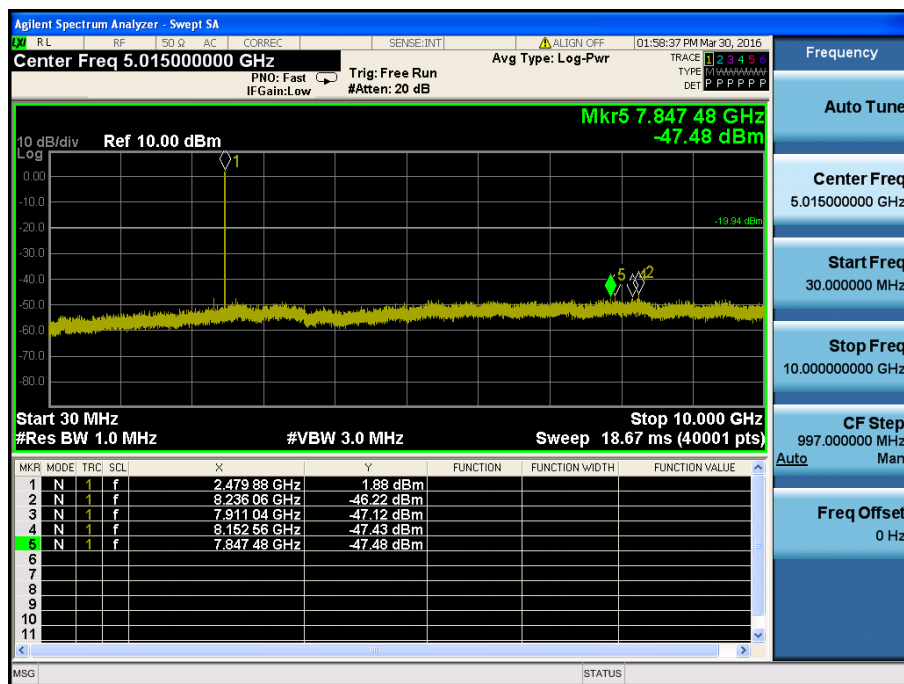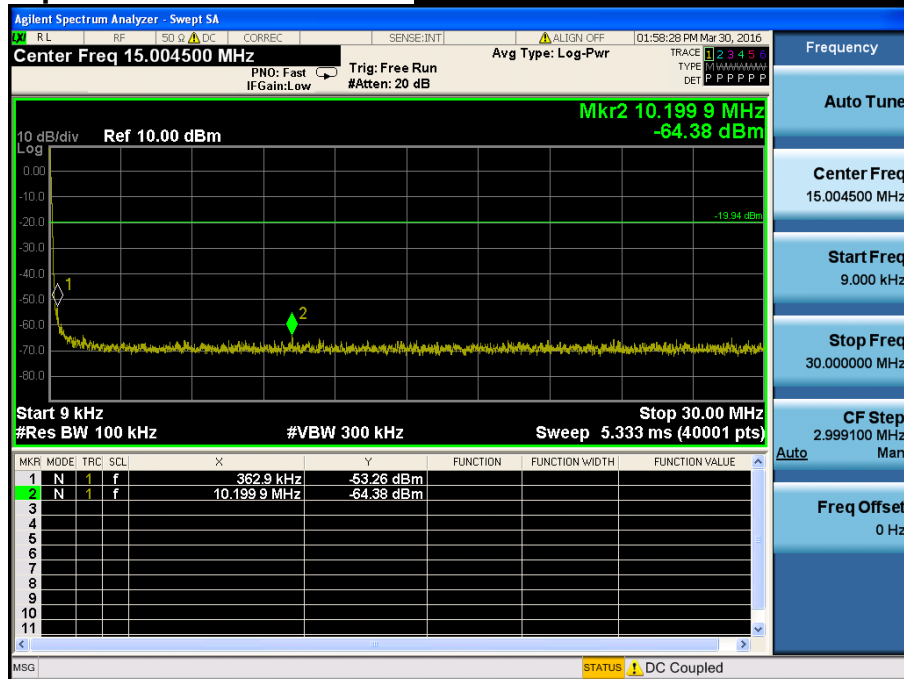Conducted Spurious Emissions***Highest Channel & Modulation : 8DPSK***



Conducted Spurious Emissions *Highest Channel & Modulation : 8DPSK*

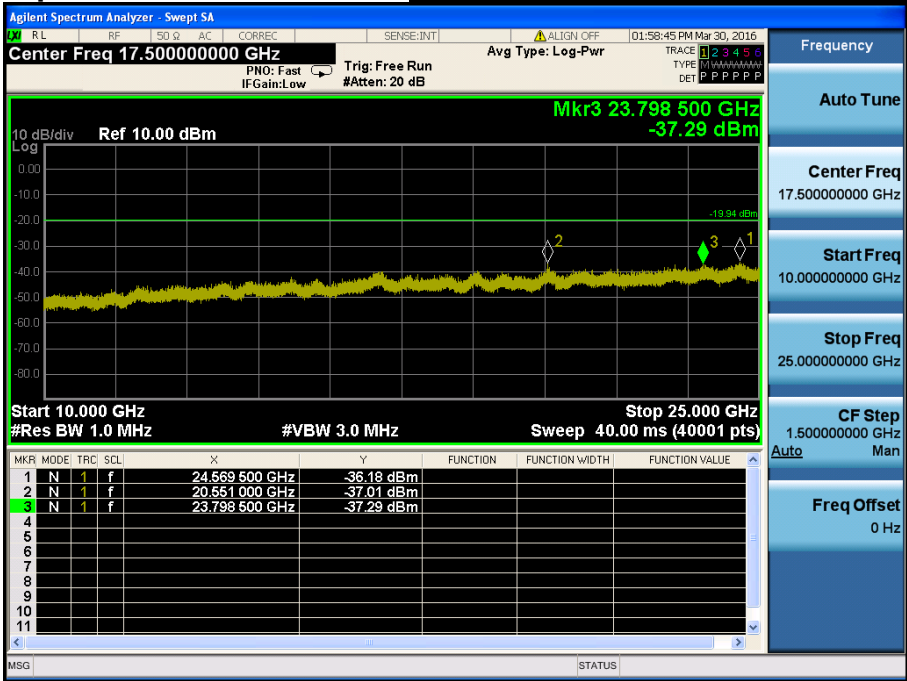

8. Transmitter AC Power Line Conducted Emission

8.1 Test Setup

Not Applicable

8.2 Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

8.3 Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

8.4. Test Results

Not Applicable

9. Antenna Requirement

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

Conclusion: **Comply**

The antenna is permanently attached.(Refer to Internal Photo file.)

- Minimum Standard :

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.

10. Occupied Bandwidth (99 %)

10.1 Test Setup

Refer to the APPENDIX I.

10.2 Limit

Limit : Not Applicable

10.3 Test Procedure

The 99 % power bandwidth was measured with a calibrated spectrum analyzer.

The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately $3 \times \text{RBW}$.

Spectrum analyzer plots are included on the following pages.


10.4 Test Results

Not Applicable


APPENDIX I

Test set up diagrams

▪ Radiated Measurement

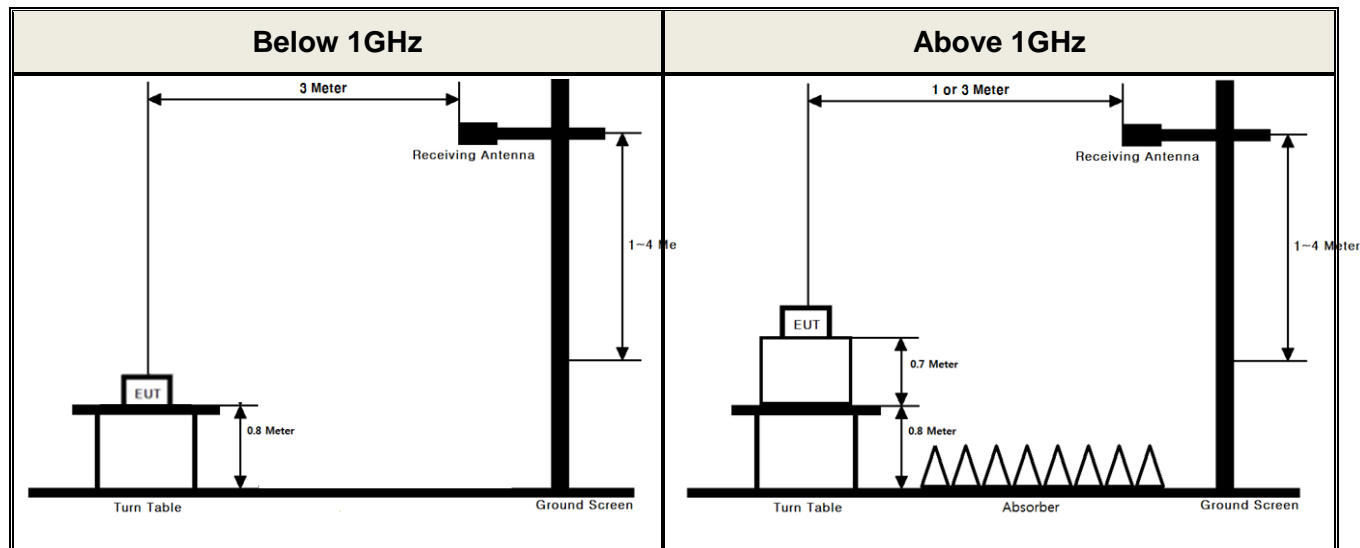

▪ Conducted Measurement

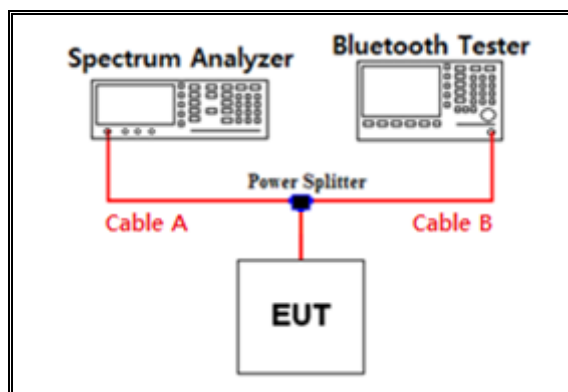

Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	6.46	15	11.96
1	7.53	20	12.65
2402 & 2440 & 2480	8.17	25	12.77
5	9.29	-	-
10	10.66	-	-

Note 1 : The path loss from EUT to Spectrum analyzer were measured and used for test.


Path loss (S/A's Correction factor) = Cable A + Power splitter

APPENDIX II

Unwanted Emissions (Radiated) Test Plot


GFSK & Lowest & X & Hor

Detector Mode : PK

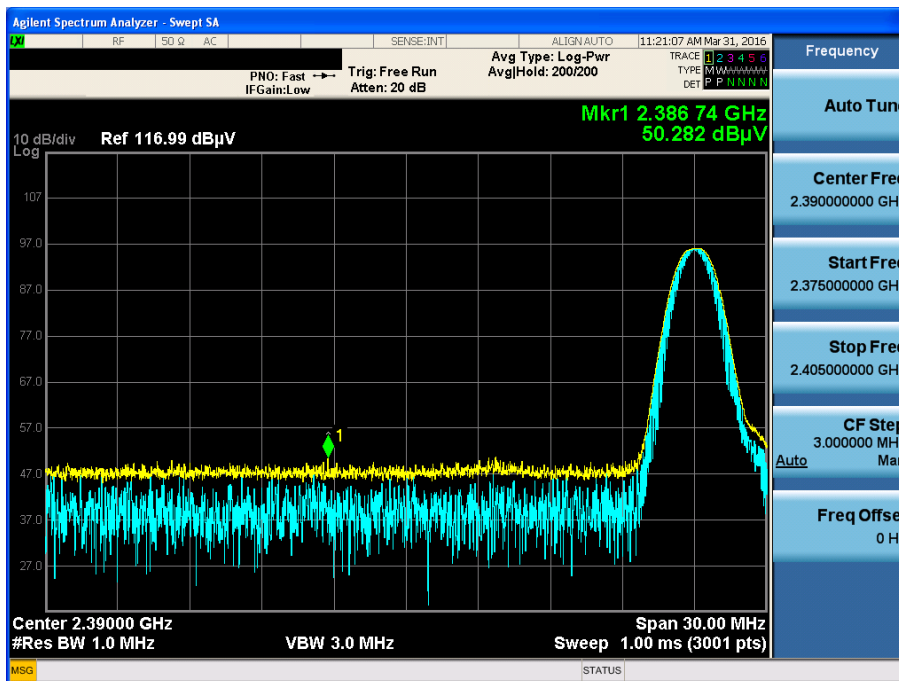

GFSK & Lowest & X & Hor


Detector Mode : AV

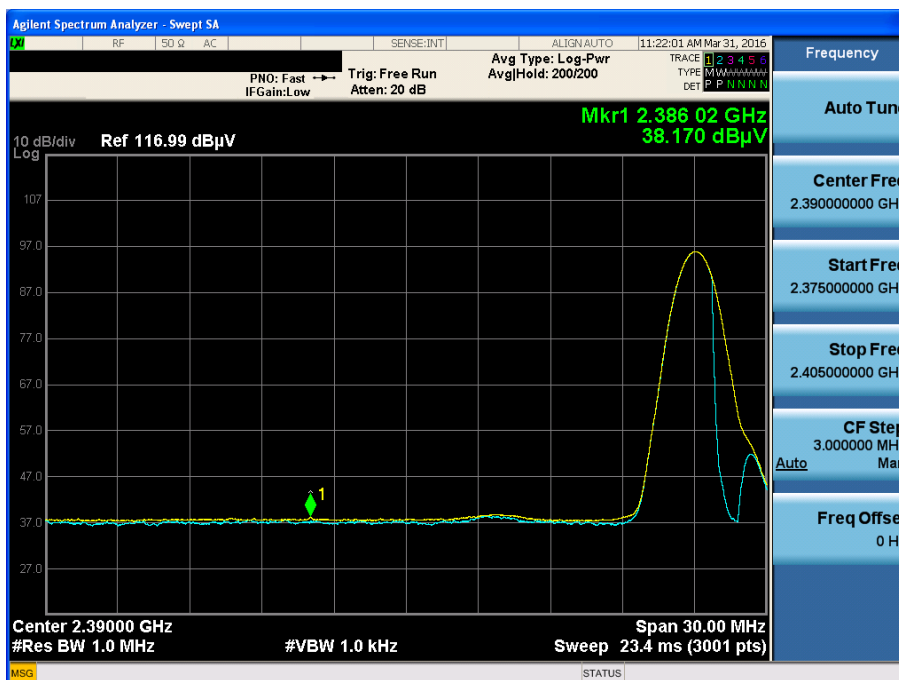




GFSK & Highest & X & Hor

Detector Mode : PK

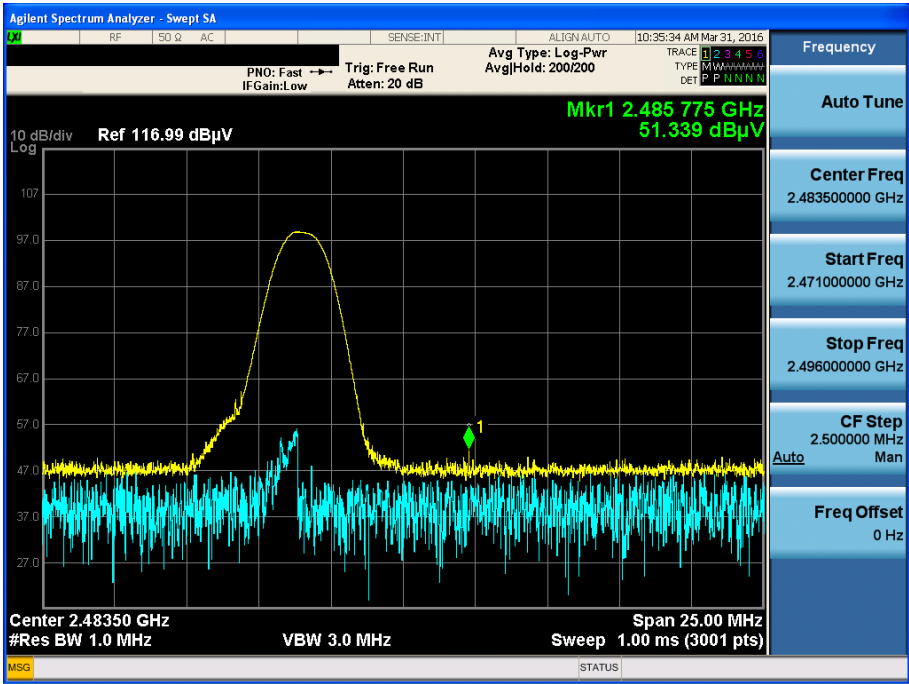


GFSK & Highest & X & Hor

Detector Mode : AV

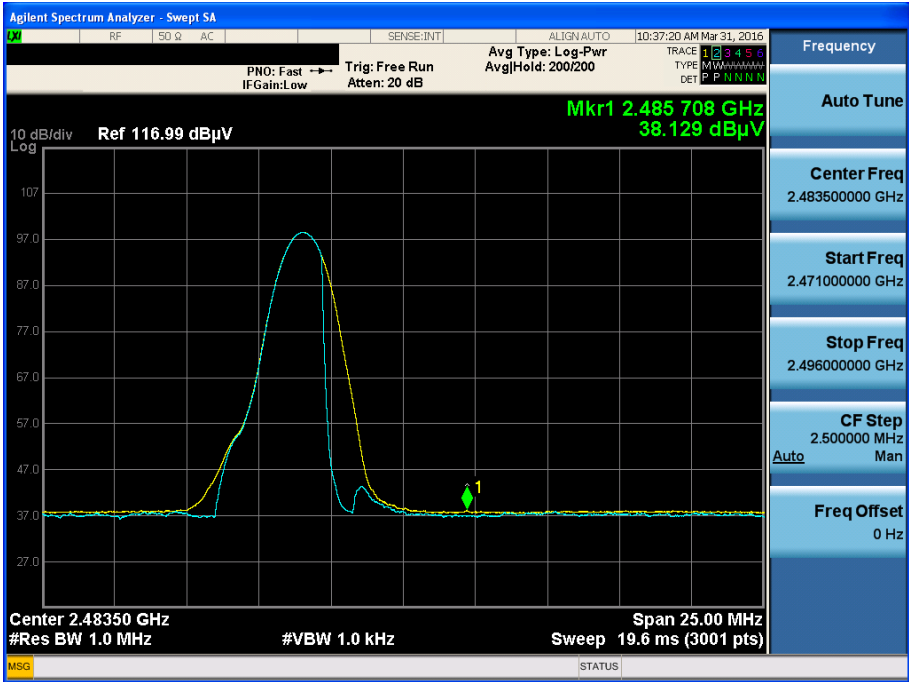


π /4DQPSK & Lowest & X & Ver

Detector Mode : PK

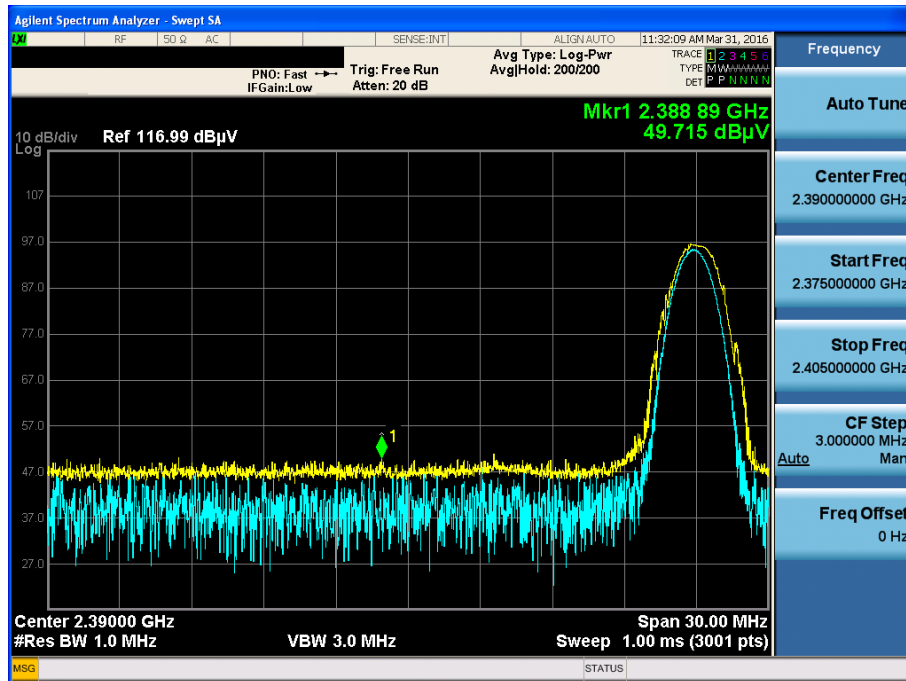
 π /4DQPSK & Lowest & X & Ver

Detector Mode : AV

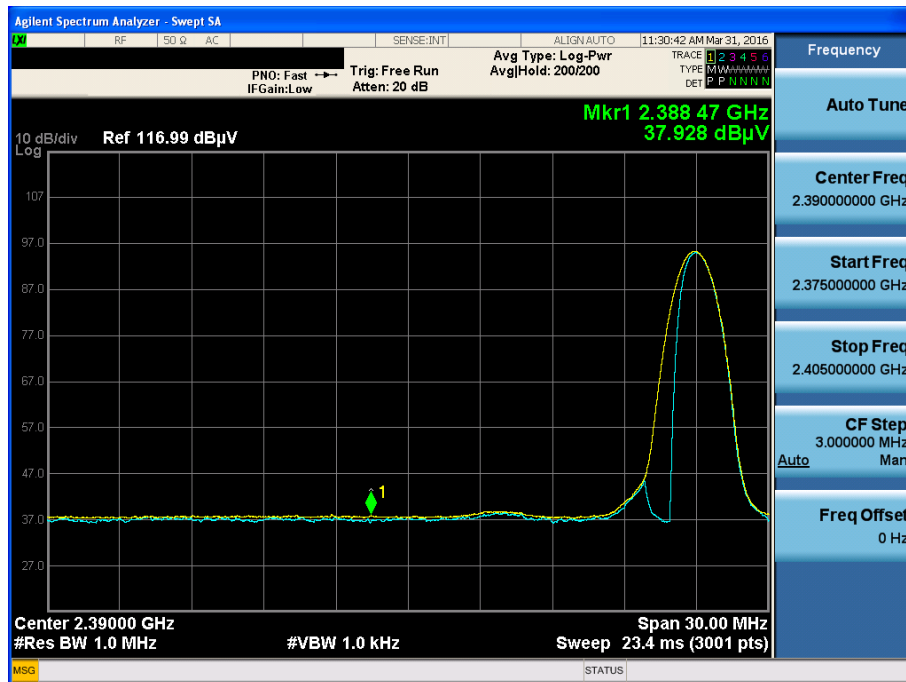


π /4DQPSK & Highest & X & Ver

Detector Mode : PK

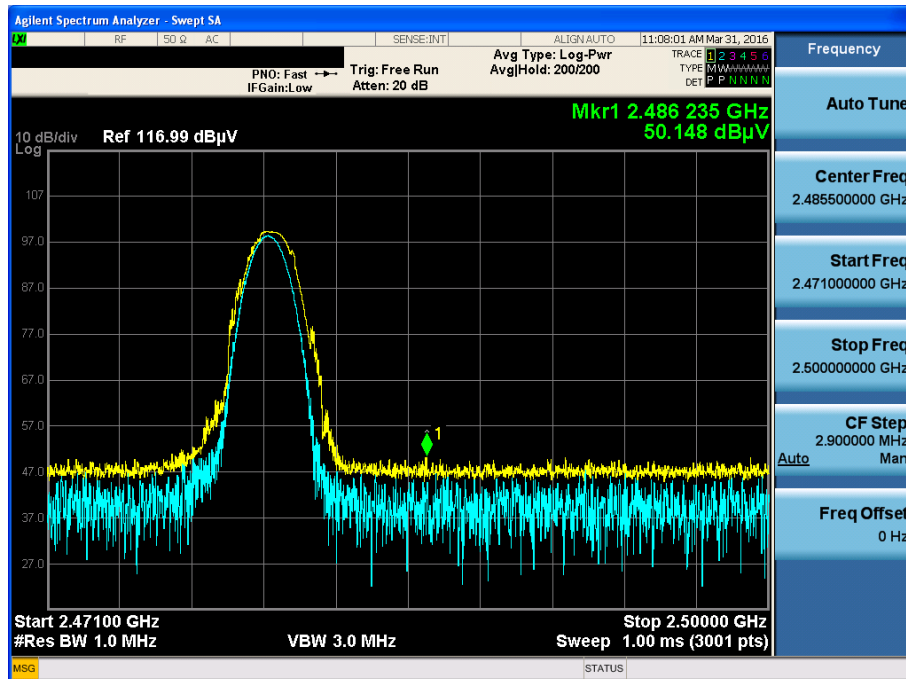
 π /4DQPSK & Highest & X & Ver

Detector Mode : AV

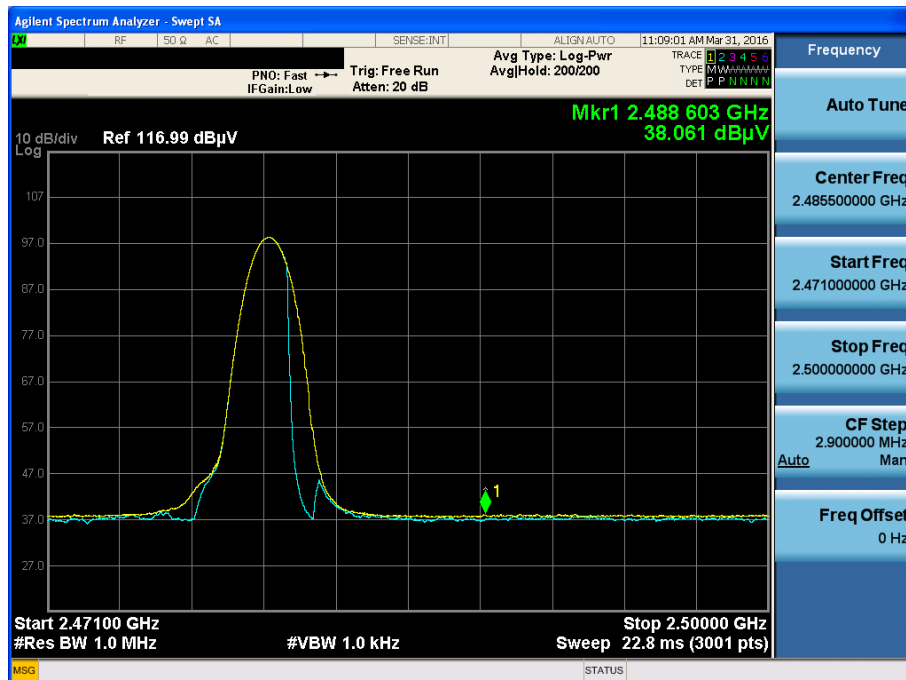


8DPSK & Lowest & X & Ver

Detector Mode : PK

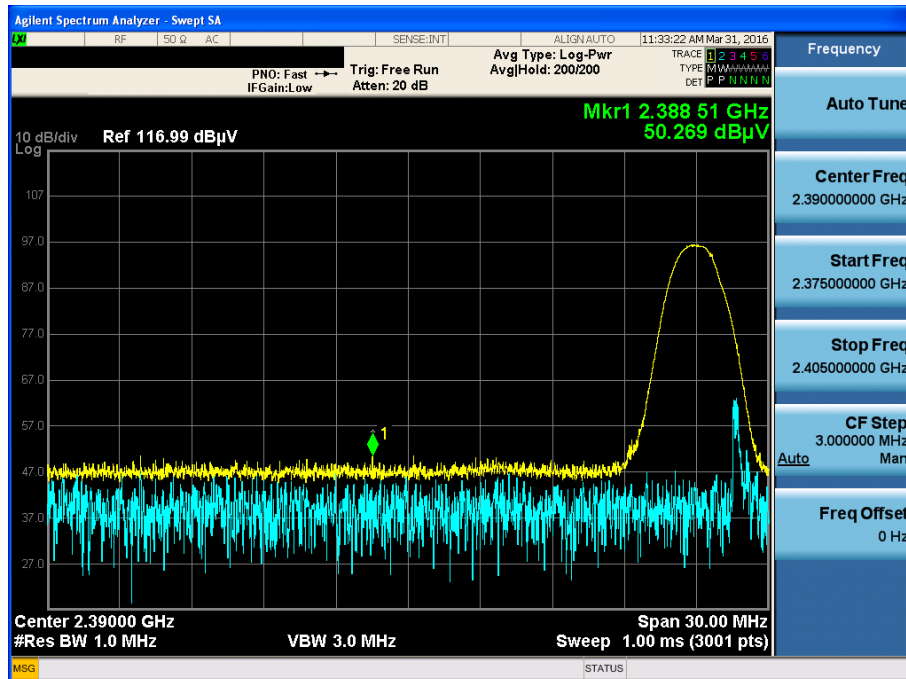


8DPSK & Highest & X & Ver

Detector Mode : AV

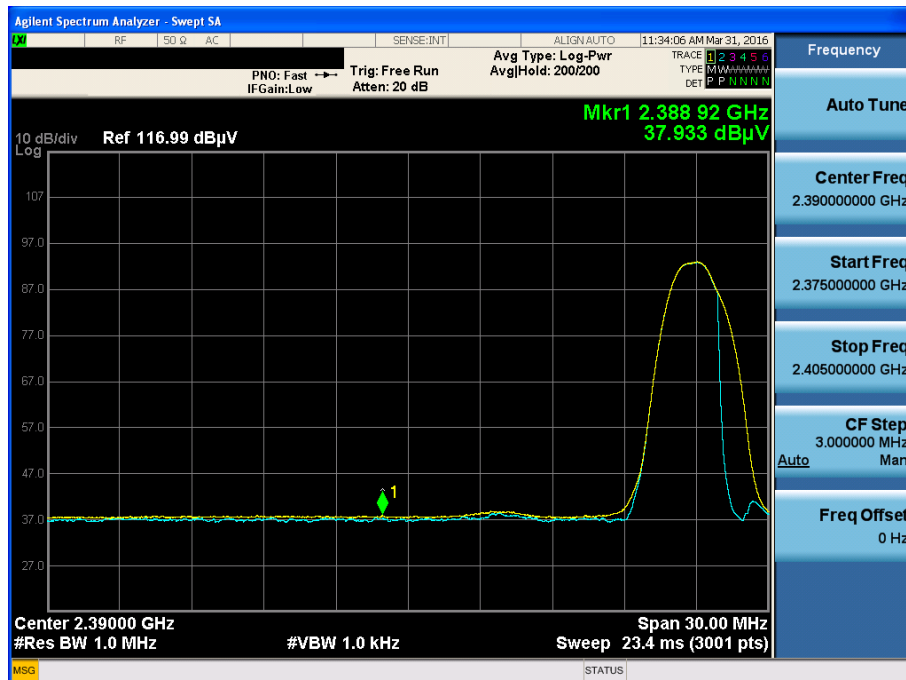


8DPSK & Highest & X & Ver

Detector Mode : PK

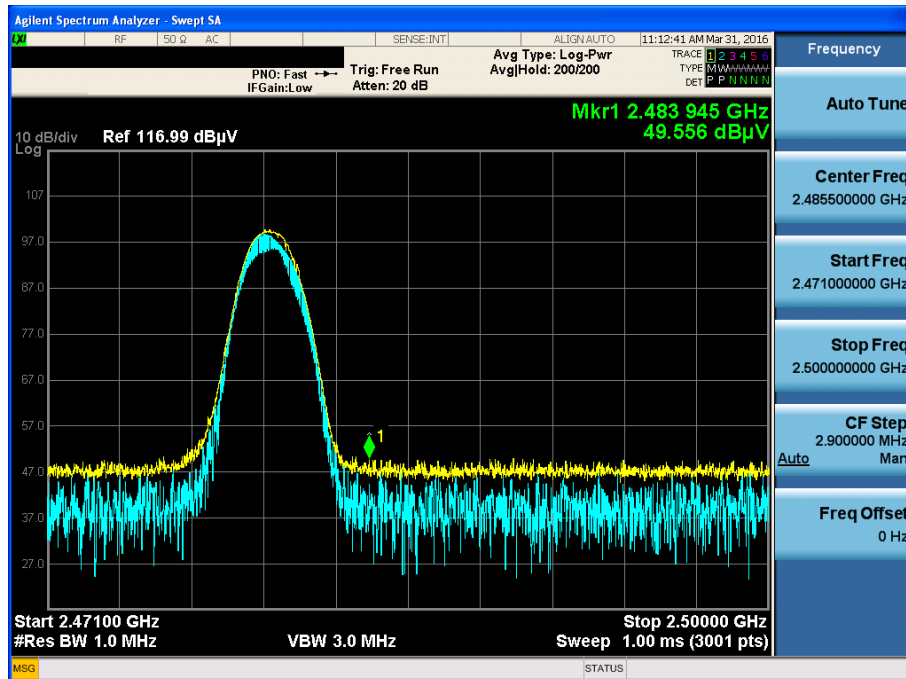

8DPSK & Highest & X & Ver


Detector Mode : AV

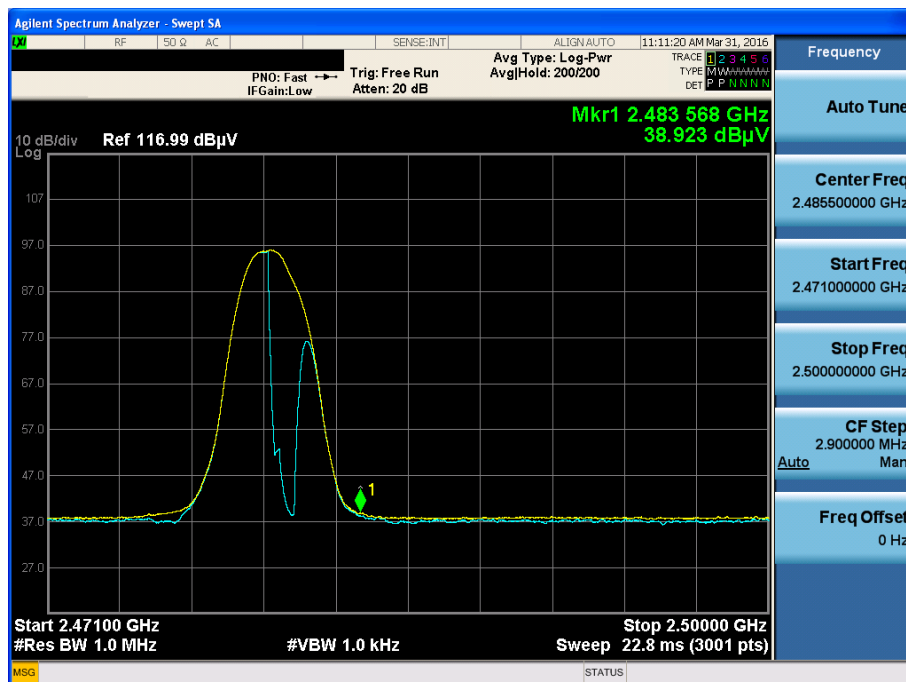




GFSK & Lowest & X & Hor

Detector Mode : PK

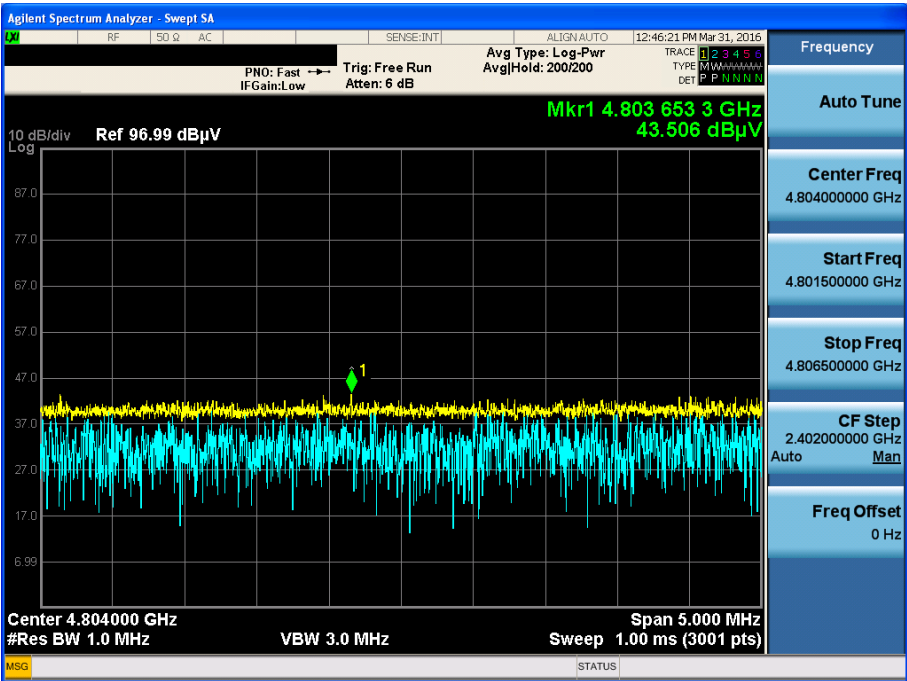

GFSK & Lowest & X & Hor


Detector Mode : AV

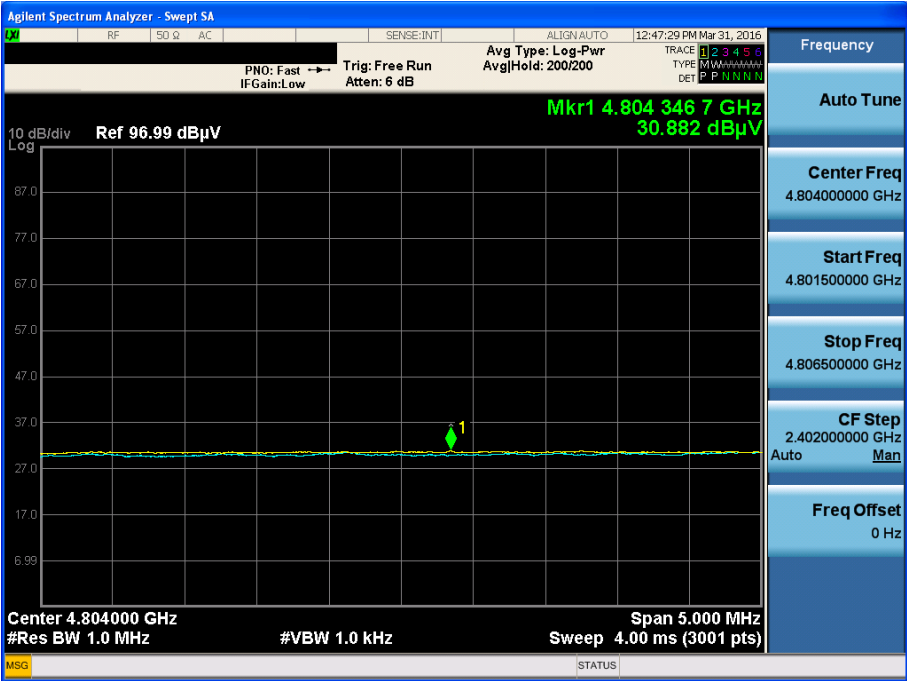




π /4DQPSK & Lowest & X & Ver

Detector Mode : PK

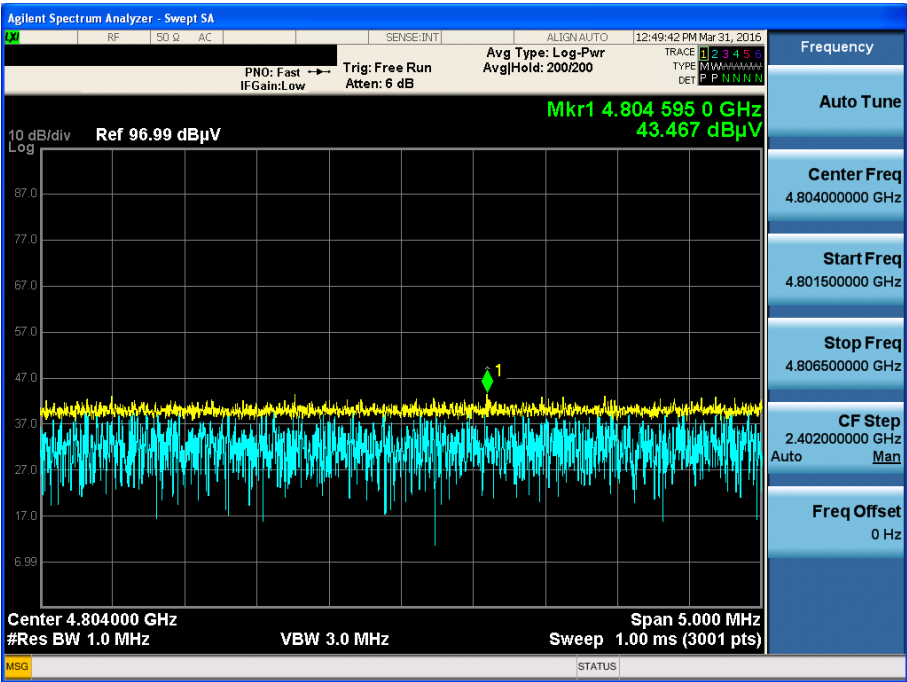


π /4DQPSK & Lowest & X & Ver

Detector Mode : AV

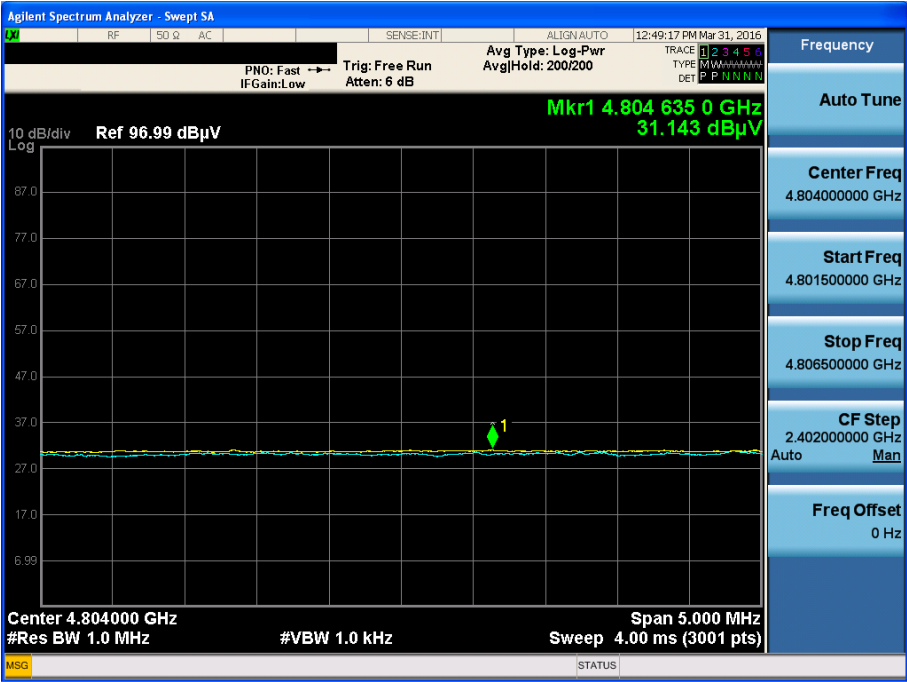


8DPSK & Lowest & X & Ver

Detector Mode : PK

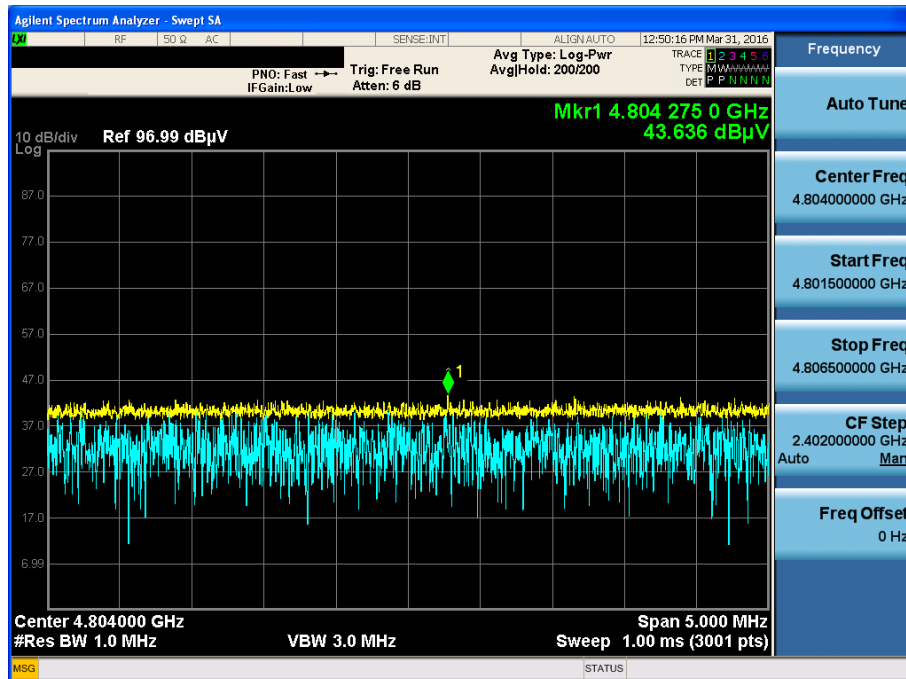


8DPSK & Lowest & X & Ver

Detector Mode : AV

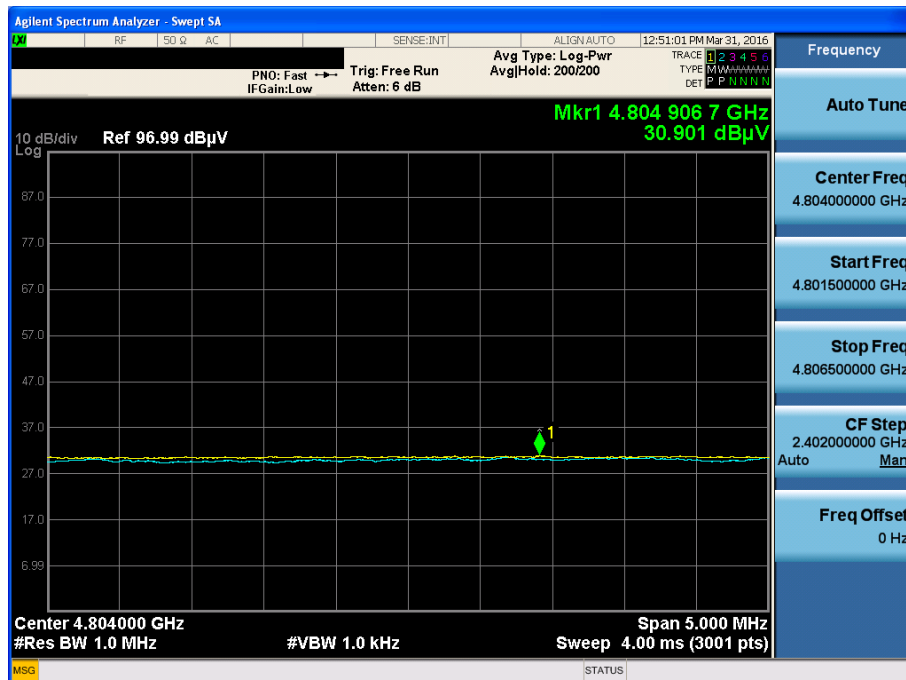


GFSK & Hopping mode & X & Hor

Detector Mode : PK

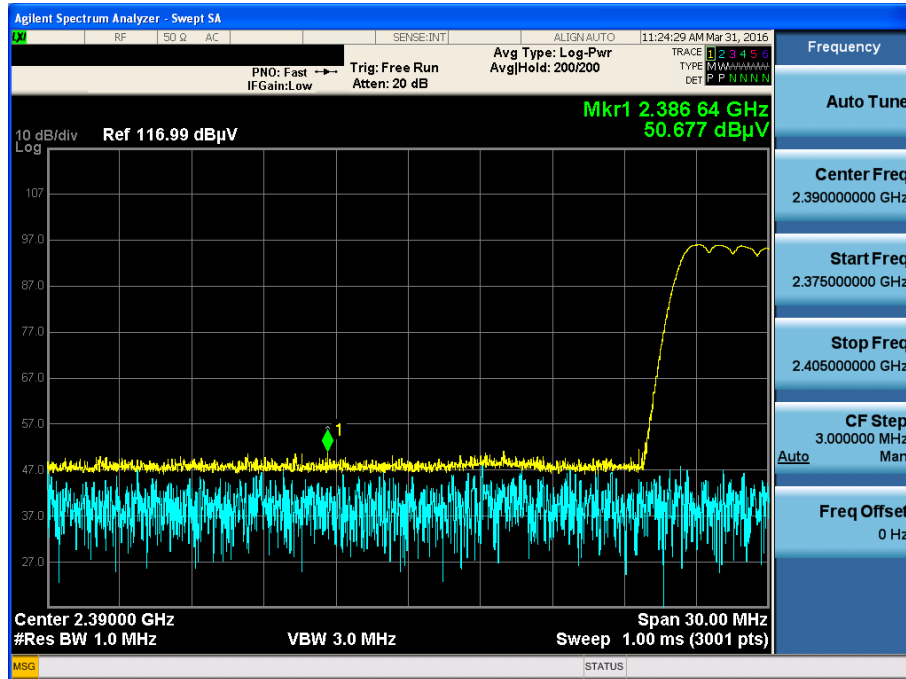


GFSK & Hopping mode & X & Hor

Detector Mode : AV

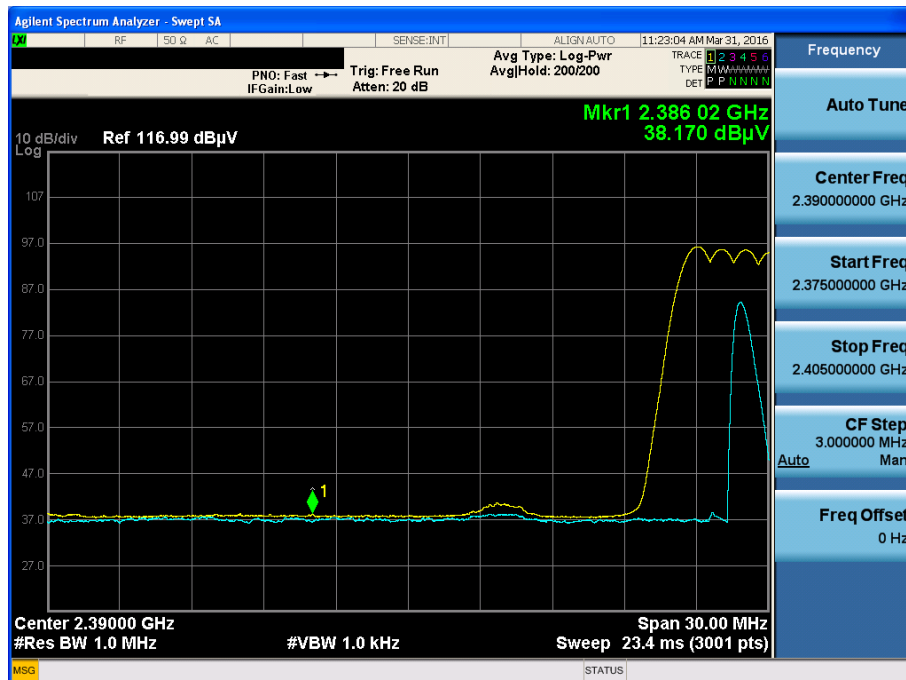


π /4DQPSK & Hopping mode & X & Ver

Detector Mode : PK

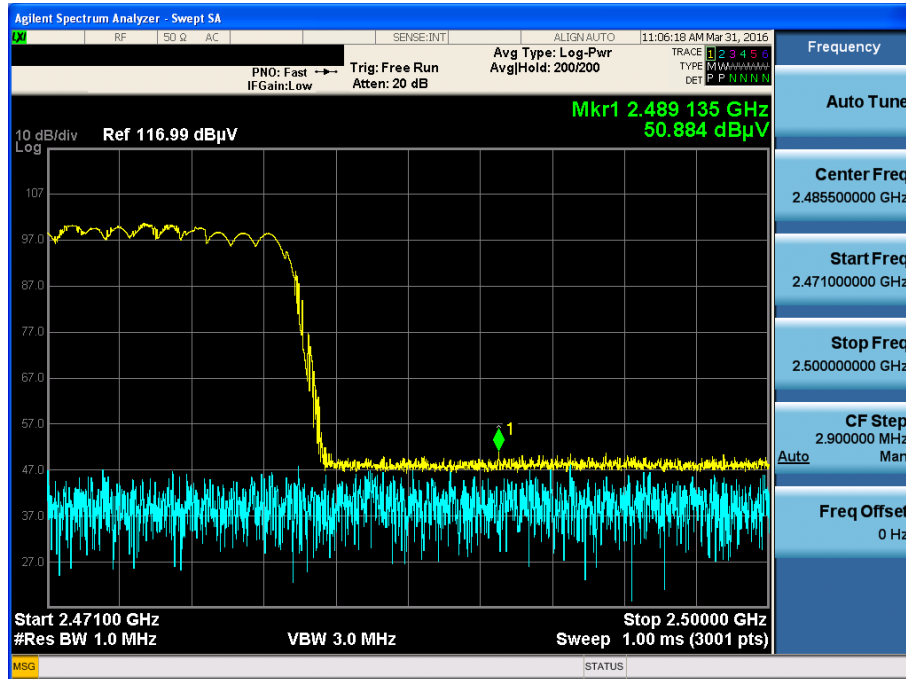
 π /4DQPSK & Hopping mode & X & Ver

Detector Mode : AV

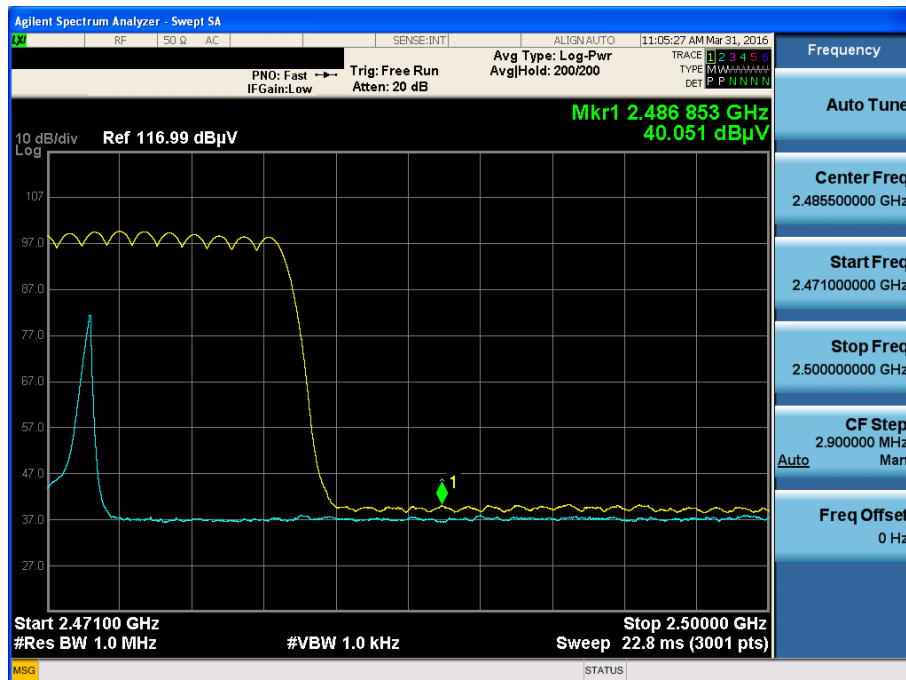

8DPSK & Hopping mode & X & Ver

Detector Mode : PK

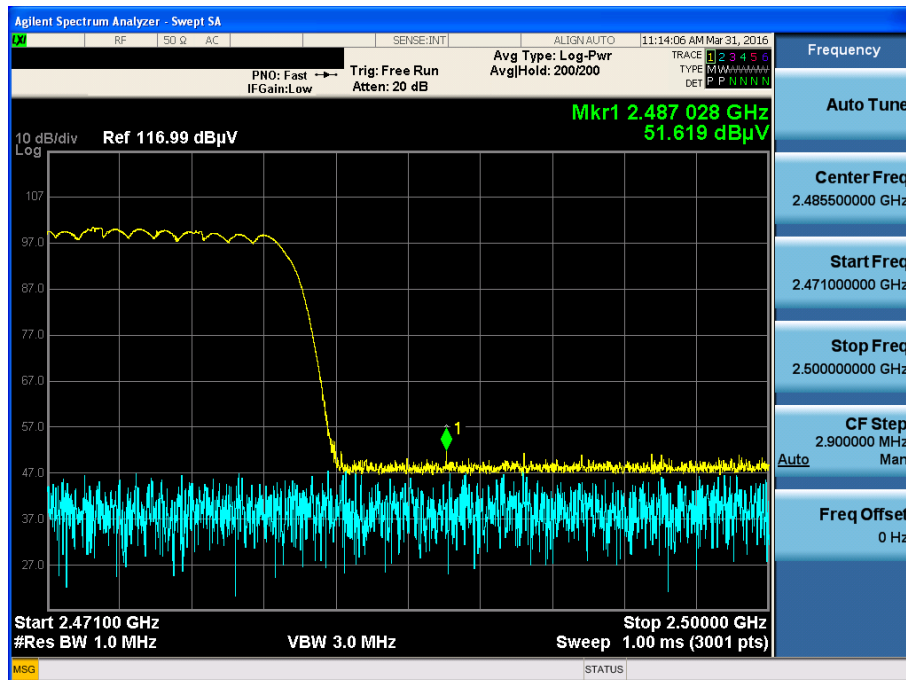

8DPSK & Hopping mode & X & Ver

Detector Mode : AV

