

FCC TEST REPORT

The Reputation of LG Defense Industry Continues with NEX1 Future.

Locations & Offices

NEX1 GUMI

133 Gongdan-dong, Gumi, Gyongsangbuk-do,
730-030, Korea

Tel : +82-54-469-8213
Fax : +82-54-469-8065



December 21, 2005

NEX 1 Future Co., Ltd.

TEST REPORT CERTIFICATION

Applicant : Enustech Inc.

Adderss : JnJ Bldg,5th Yeoksam 2-dong,785-12, Gangnam_gu, Seoul,
Republic of Korea

EUT Name : Bluetooth USB Dongle

Model No. : ImFONE-HS



Serial No. : Engineering Sample

FCCID : *TT2EUSBDHSN0005*

Testing location : LG-Nortel Co. Ltd.
299, Gongdan-Dong, Gumi-City , Gyeongsangbuk-Do, 730-030,
R.O.K

Applied specification : FCC Part 15

Test result : The above mentioned test item passed.

Test Date	December 21, 2005	Review Date	December 21, 2005
Tested by	Hyo-Jeung, Cho	Reviewed by	Jeong-Hi, Jin
Title	Engineer	Title	EMC Manager
Signature		Signature	

I HEREBY CERTIFY THAT the data shown in this report were made in accordance with the procedures given in the applied specification and I assume full responsibility for accuracy and completeness of these data.

Note : This test report relates to the a. m. test item. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products.

Contents

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION	5
1.2 PROJECT DATA.....	5
1.3 APPLICANT	5
1.4 MANUFACTURER	5
2. EUT INFORMATION.....	6
2.1 GENERAL EUT INFORMATION.....	6
2.2 CENTER FREQUENCY OF TESTED CHANNEL.....	6
2.3 TEST ENVIRONMENT	6
2.4 ACCESSORIES AND ANCILLARY EQUIPMENT	6
3. TESTING FACILITIES.....	7
4. EUT DESCRIPTION AND OPERATIONAL DESCRIPTION.....	7
5. TEST SET-UP.....	8
5.1 PRINCIPLE OF CONFIGURATION	8
5.2 OPERATIONAL MODES	8
5.3 APPLIED SPECIFICATION	8
6. TEST REPORT SUMMARY	9
7. TEST RESULTS.....	10
7.1 ANTENNA CONNECTOR REQUIREMENTS	10
7.2 AC CONNECTED EMISSION	11
7.3 CARRIER FREQUENCY SEPARATION.....	16
7.4 TIME OF OCCUPANCY(DWELL TIME)	18
7.5 20dB BANDWIDTH.....	20
7.6 NUMBER OF HOPPING FREQUENCIES REQUIREMENTS	24
7.7 PSEUDORANDOM FHS AND EQUAL HOPPING FREQUENCY USE REQUIREMENTS.....	26
7.8 RECEIVER INPUT BANDWIDTH REQUIREMENTS.....	27

7.9 PEAK OUTPUT POWER	28
7.10 BAND-EDGE COMPLIANCE	32
7.11 SPURIOUS CONDUCTED EMISSIONS	36
7.12 SPURIOUS RADIATED EMISSIONS	47
8. LIST OF TEST AND MEASUREMENT INSTRUMENTS	50
9. NOTES	52

1. General Information

1.1 Product Description

Product Name : Bluetooth USB Dongle
Product ID : ImFONE-HS
Serial No. : Prototype
FCC ID : TT2EUSBDHSN0005

1.2 Project data

Receipt of EUT : December 15, 2005
Date of Test : December 21, 2005
Data of report : December 21, 2005

1.3 Applicant

Company Name : Enustech,.Inc
Address : JnJ Bldg,5th Yeoksam 2-dong,785-12,Gangnam_gu,Seoul,
Republic of Korea
Contact Person : Mr. Hyo-Tae, Kim

1.4 Manufacturer

Company Name : Enustech,.Inc
Address : JnJ Bldg,5th Yeoksam 2-dong,785-12,Gangnam_gu,Seoul,
Republic of Korea
Contact Person : Mr. Hyo-Tae, Kim

2. EUT Information

2.1 General EUT Information

Type	Transmitter	Receiver
FCC Classification	FHSS Sequence Spread Spectrum (FHSS)	FHSS Sequence Spread Spectrum (FHSS)
Operating frequency range	2402 – 2480 MHz	2402 – 2480 MHz
Bands of operation	2.400 – 2.4835 GHz	2.400 – 2.4835 GHz
Number of Channels	79	79
Channel Separation	1MHz	1MHz
Type of Antenna	Surface Mounting Typed Antenna	Surface Mounting Typed Antenna
Power Supply	DC 5.0 V from USB ports of Personal computer	DC 5.0 V from USB ports of Personal computer

2.2 Center Frequency of Tested Channel

Frequency	Tx (MHz)	Rx (MHz)
Lowest	2402	2402
Middle	2441	2441
Highest	2480	2480

2.3 Test Environment

Temperature	25°C
Relative Humidity	30 ~ 60%
Voltage	DC 5.0 V
AC Voltage	AC 115V

2.4 Accessories and Ancillary Equipment

Equipment	Model No.	Serial Number	Maker
Laptop PC	PS428L-OE142	30014068J	Toshiba

3. Testing Facilities

LG-Nortel Co. Ltd.

299, Gongdan-Dong, Gumi-City , Gyeongsangbuk-Do, 730-030, R.O.K

4. EUT Description and Operational Description

imFONE-HS enables you to make/receive a call through your Bluetooth wired head set or USB phone when you access to Instant Messenger in the PC.

imFONE-HS is connected to USB port of your PC or Lap top , it just works without any driver installation or software and you can move within 50m~100m.

Before using your imFONE-HS , it is necessary to pair with Bluetooth Headset.

And the User don't have to pair again.

imFONE-HS is very comfortable, user can making a call or receiving a call easily if there is a connection with Instant Messenger and Bluetooth Headset.

It enables you to call anyone anywhere at competitive rates using Instant Messenger.

The charge is free or cheaper than mobile phone for calling and audio quality is good

And so it is difficult to find any differences between imFONE-HS and mobile phone.

- Feature

1. Bluetooth spec: class1, Max+20dBm Tx output Power
2. Frequency: 2402~2480MHz
3. Full Duplex DSP
4. Voltage: DC3.3 V regulated
5. Sensitivity(RF): -85dBm
6. Interface Type: USB connector, USB1.1 compatible
7. Operating Range: Max. 50M (150feet)
8. Bluetooth v1.2
9. Speed: 723kbps
10. System Requirement: Windows XP , 2000 , ME
11. Dimension: 20mm x 60mm x 6mm

5. Test Set-up

5.1 Principle of configuration

Conducted : The equipment under test (EUT) was configured with a temporary SMA Connector and EUT transmits the related packet type with PRBS 9 as payload.

Emission:The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes and test settings were adapted accordingly in reference to the instructions for use.

For details, please refer to the Operation mode in chapter 7.

5.2 Operational Modes

Page Scan,

Inquiry Scan

Hopping Mode

Fixed mode (2402Mhz, 2441Mhz and 2480Mhz)

5.3 Applied Specification

FCC Part 15

6. Test Report Summary

Related Clause	Test Cases	FCC Part Sections	Result (Note1)
7.1	Antenna Connector Requirements	15.203 15.204	C
7.2	AC Connected Emission	15.207	Pass
7.3	Carrier Frequency Separation	15.247	Pass
7.4	Time of Occupancy(Dwell time)	15.247	Pass
7.5	20dB Bandwidth	15.247	Pass
7.6	Number of Hopping Frequencies Requirements	15.247	C
7.7	Pseudorandom Frequency Hopping Sequence and Equal Hopping Frequency use Requirements	15.247	C
7.8	Receiver Input Bandwidth Requirements	15.247	C
7.9	Peak Output Power	15.247	Pass
7.10	Band-edge Compliance	15.247	Pass
7.11	Spurious Conducted emissions	15.247	Pass
7.12	Spurious Radiated emissions	15.247	Pass

* Note1: C: Complies, Pass: Passed, Fail : Failed and NA : Not Applicable

7. Test Results

7.1 Antenna Connector Requirements

Requirements

Subclause 15.203 and 15.204(c)

According to the Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.

The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to the Part 15.204(c), only the antenna with which an intentional radiator is authorized may be used with the intentional radiator.

Test results

RESULT:

Complies

The antenna is permanently attached on the PCB.

The EUT has a Surface Mounting Typed Antenna soldered on the circuit board.
For more information on the antenna:

Antenna gain	: 0 dBi
Manufacturer	: AMOTECH CO., LTD.
Model No.	: ALA931C5
Type	: Surface Mounting Typed Antenna

7.2 AC Connected Emission

Test Mode and conditions

The power is supplied by DC 5.0 V from USB ports of Personal computer.

Requirements

Subclause15.207(a)


For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency of Emission (M Hz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test results


* Neutral

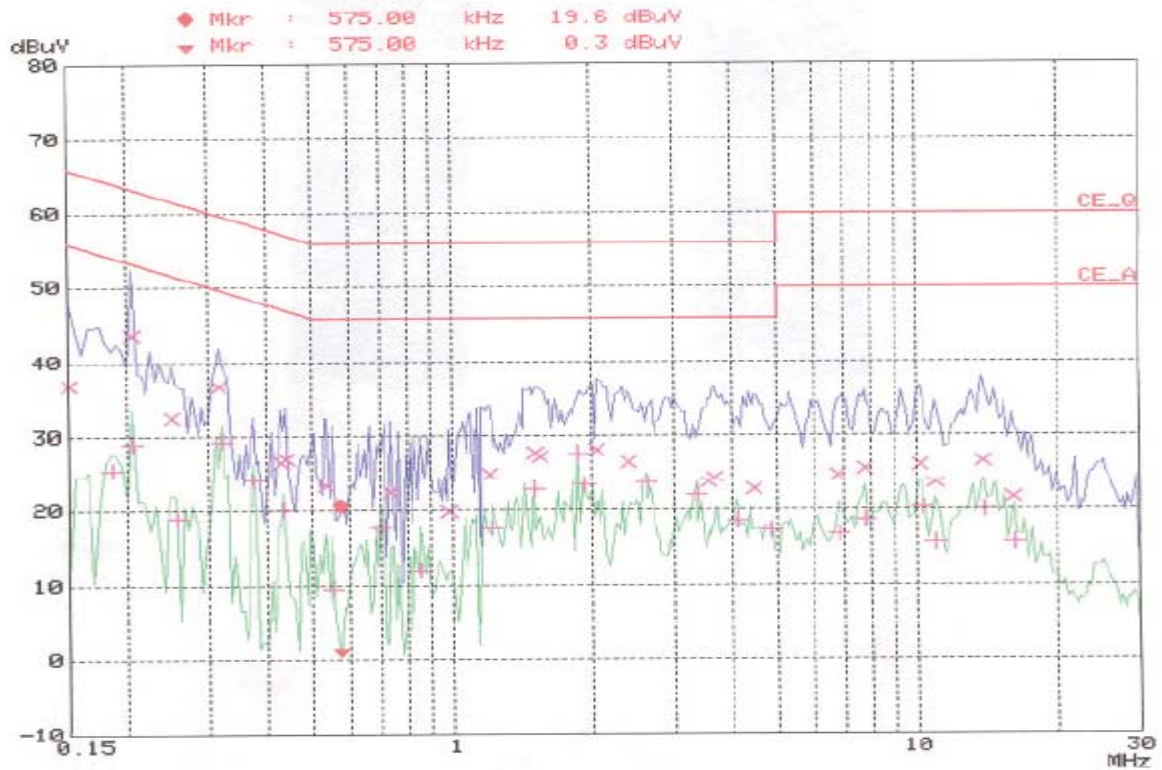

Frequency MHz	QP Level dBuV	Delta Limit dB	Phase -	PE -
0.15000	36.9	-29.0	N	gnd
0.20500	43.7	-19.7	N	gnd
0.25000	32.6	-29.1	N	gnd
0.31500	36.9	-22.9	N	gnd
0.43000	26.7	-30.5	N	gnd
0.44000	27.2	-29.8	N	gnd
0.53500	23.4	-32.5	N	gnd
0.74000	22.5	-33.4	N	gnd
0.98500	19.9	-36.0	N	gnd
1.20500	25.1	-30.8	N	gnd
1.51000	28.0	-27.9	N	gnd
1.54500	27.5	-28.4	N	gnd
2.05000	28.4	-27.5	N	gnd
2.39000	26.8	-29.1	N	gnd
3.57000	23.9	-32.0	N	gnd
3.68000	24.6	-31.3	N	gnd
4.46000	22.9	-33.0	N	gnd
6.77500	24.9	-35.0	N	gnd
7.73000	25.9	-34.0	N	gnd
10.17000	26.4	-33.5	N	gnd
10.93500	23.7	-36.2	N	gnd
13.89500	26.9	-33.0	N	gnd
16.09000	21.7	-38.2	N	gnd

Frequency MHz	AV Level dBuV	Delta Limit dB	Phase -	PE -
0.18500	25.7	-28.5	N	gnd
0.20500	29.2	-24.2	N	gnd
0.25500	19.1	-32.5	N	gnd
0.32000	29.5	-20.2	N	gnd
0.37500	24.2	-24.1	N	gnd
0.43500	20.2	-26.9	N	gnd
0.55000	9.6	-36.3	N	gnd
0.70000	17.7	-28.2	N	gnd
0.85500	12.1	-33.9	N	gnd
1.22000	17.6	-28.3	N	gnd
1.49500	22.9	-23.0	N	gnd
1.87000	27.9	-18.0	N	gnd
1.93000	23.5	-22.5	N	gnd
2.62000	23.7	-22.2	N	gnd
3.37000	22.2	-23.7	N	gnd
4.12000	18.6	-27.3	N	gnd
4.86500	17.5	-28.5	N	gnd
6.80500	17.0	-33.0	N	gnd
7.73000	18.8	-31.1	N	gnd
10.20000	20.4	-29.6	N	gnd
10.96500	15.8	-34.1	N	gnd
13.92000	20.1	-29.8	N	gnd
16.11500	15.8	-34.1	N	gnd

* Live

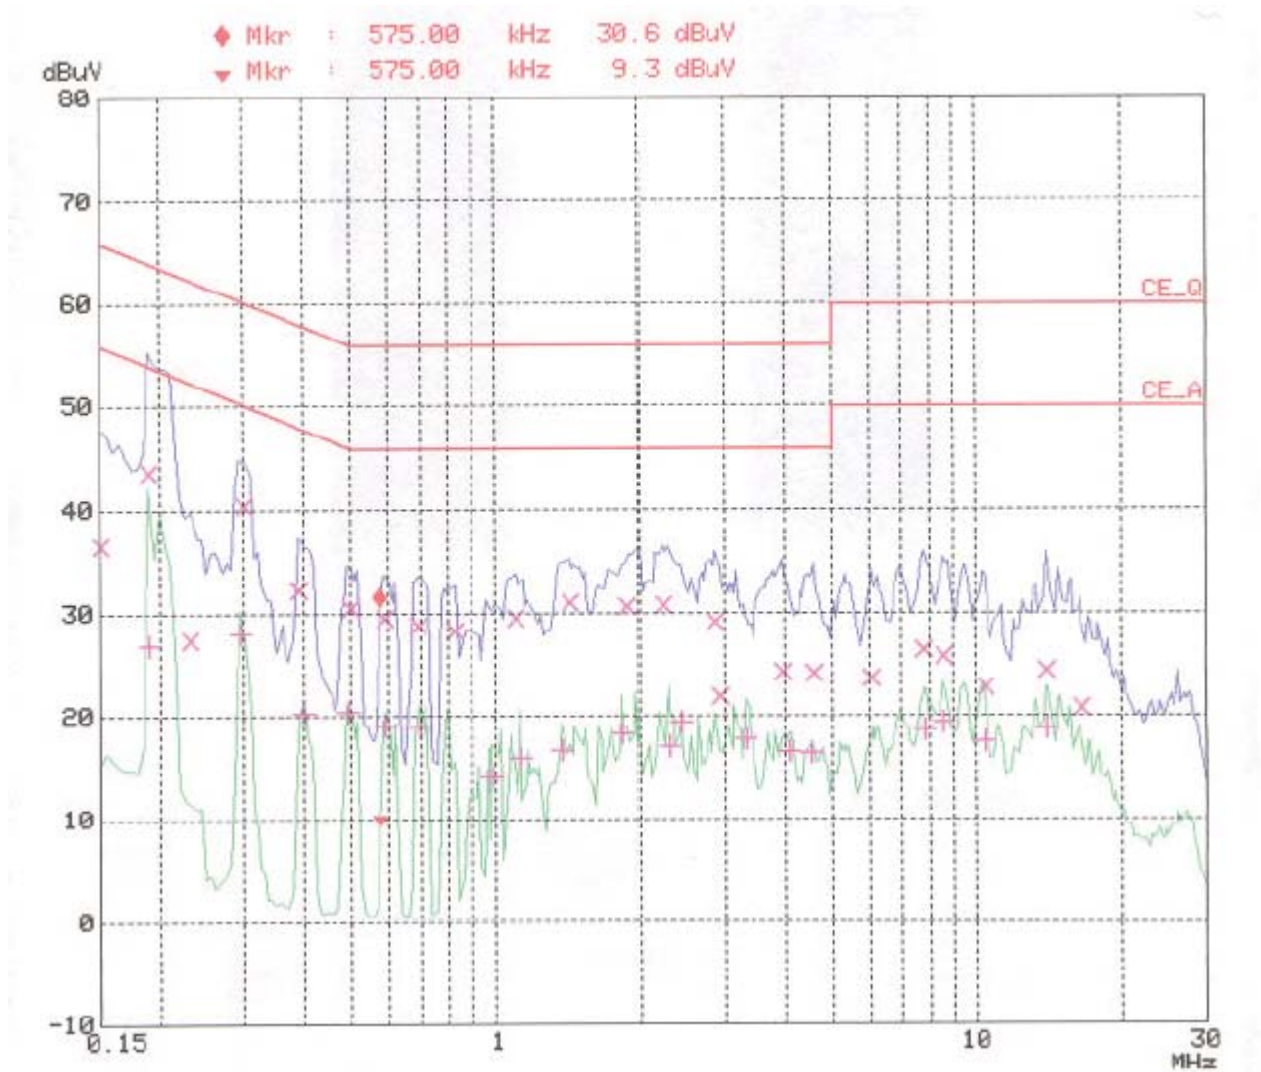

Frequency MHz	QP Level dBuV	Delta Limit dB	Phase -	PE -
0.15000	36.7	-29.2	L1	gnd
0.19000	43.7	-20.3	L1	gnd
0.23000	27.4	-35.0	L1	gnd
0.30000	40.4	-19.8	L1	gnd
0.39000	32.3	-25.6	L1	gnd
0.50000	30.6	-25.3	L1	gnd
0.59000	29.6	-26.3	L1	gnd
0.69000	28.9	-27.0	L1	gnd
0.82500	28.3	-27.6	L1	gnd
1.10500	29.6	-26.3	L1	gnd
1.43500	31.0	-24.9	L1	gnd
1.89500	30.7	-25.2	L1	gnd
2.23000	30.9	-25.0	L1	gnd
2.85500	29.2	-26.7	L1	gnd
2.92500	22.0	-33.9	L1	gnd
3.94000	24.4	-31.5	L1	gnd
4.59500	24.3	-31.6	L1	gnd
6.06000	23.8	-36.1	L1	gnd
7.79000	26.5	-33.4	L1	gnd
8.58000	25.9	-34.0	L1	gnd
10.48000	22.9	-37.0	L1	gnd
14.07500	24.6	-35.4	L1	gnd
16.51500	20.9	-39.0	L1	gnd

Frequency MHz	AV Level dBuV	Delta Limit dB	Phase -	PE -
0.19000	27.0	-27.1	L1	gnd
0.29500	28.2	-22.1	L1	gnd
0.40000	20.3	-27.4	L1	gnd
0.49500	20.5	-25.5	L1	gnd
0.59000	19.1	-26.8	L1	gnd
0.69500	19.0	-26.9	L1	gnd
0.98500	14.2	-31.8	L1	gnd
1.13500	16.0	-29.9	L1	gnd
1.37500	16.8	-29.1	L1	gnd
1.84500	18.4	-27.5	L1	gnd
2.29000	17.1	-28.8	L1	gnd
2.43000	19.5	-26.4	L1	gnd
3.31000	17.9	-28.0	L1	gnd
4.06500	16.7	-29.2	L1	gnd
4.55000	16.6	-29.3	L1	gnd
7.81500	18.8	-31.1	L1	gnd
8.58500	19.6	-30.4	L1	gnd
10.40000	17.6	-32.3	L1	gnd
14.07500	18.8	-31.1	L1	gnd

7.3 Carrier Frequency Separation

Test Mode and conditions

Mode of operation : Tx mode (hopping on), DH1 packet with PRBS9 payload
Measurement Method : Conducted
Detector : PK
Trace : Max hold
RBW/VBW : 100kHz/300kHz

Requirements


Subclause 15.247(a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

Test results

Reference frequency (MHz)	Channel Separation (kHz)	Limit	Results
2441.000	997.5	Minimum of 25kHz or the 20dB bandwidth	Pass

Carrier Frequency Separation Plot

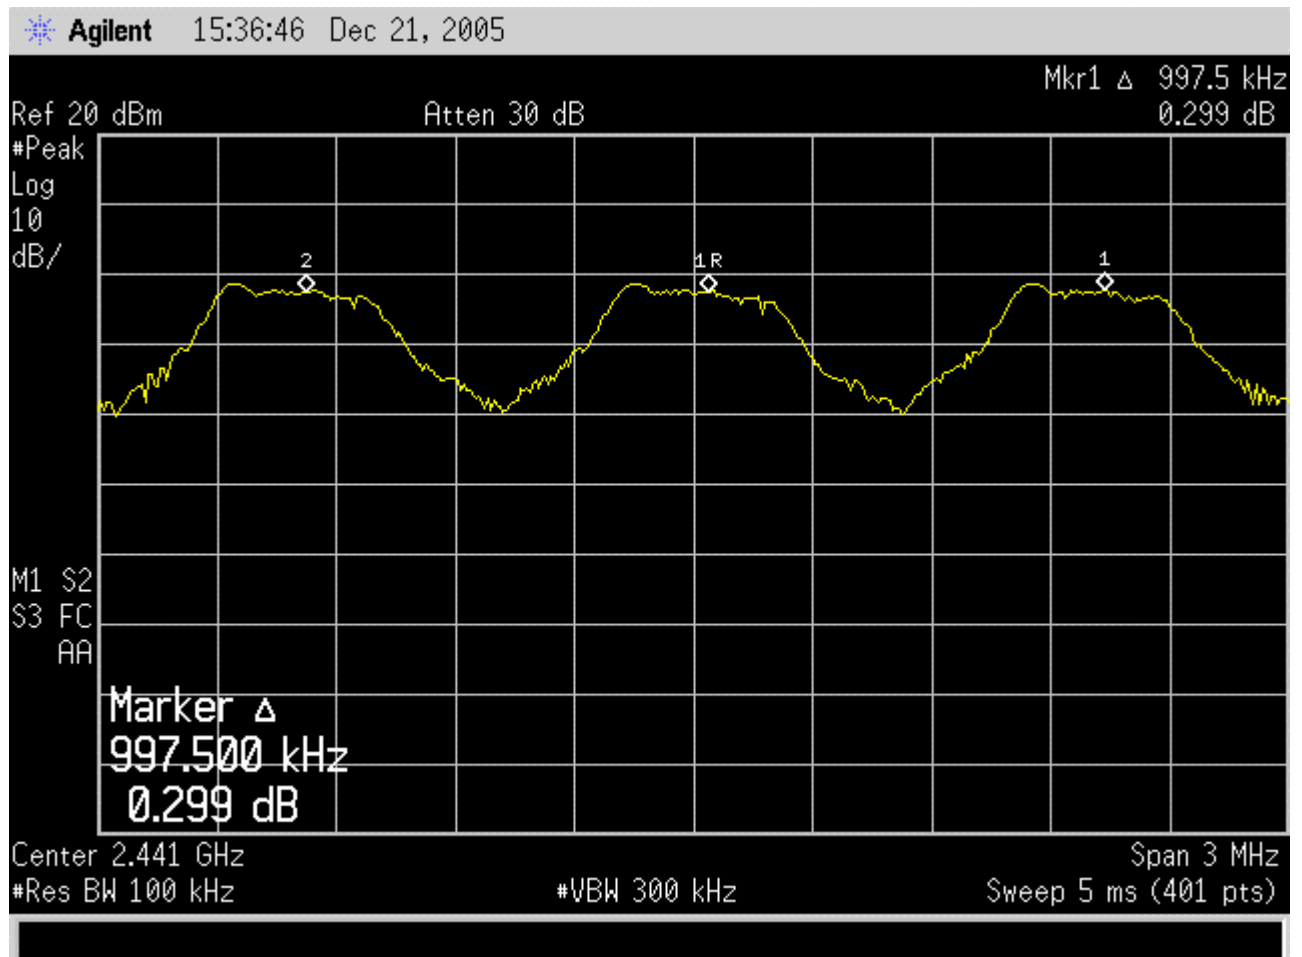

7.4 Time of Occupancy(Dwell time)

Test Mode and conditions

Mode of operation : Hopping on , DH5 packet with PRBS9 payload
Measurement Method : Conducted
Detector : PK
Trace : Max hold
RBW/VBW : 1MHz/300kHz

Requirements

Subclause 15.247(a)(1)(iii)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 75 hopping frequencies. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

Test results

The system makes 1600 hops per second or has a length of 625us.


Let take DH5 packet in worst case. A DH5 packet has 5 slots for transmitting and 1 slot for receiving. It means it can have maximum 266.67 ($=1600/6$) hops per second.

Therefore it has 3.38 hops($=266.67/79$) per second for each channel.

And it has 106.81hops appearance for 31.6 seconds ($=0.4 \times 79$ channels).

Length per slot(L)	Number slots (N)	Dwell Time (=L*N)	Limit	Results
2.875ms	106.81	307.07875 ms	0.4 seconds	Pass

Time of Occupancy Plot

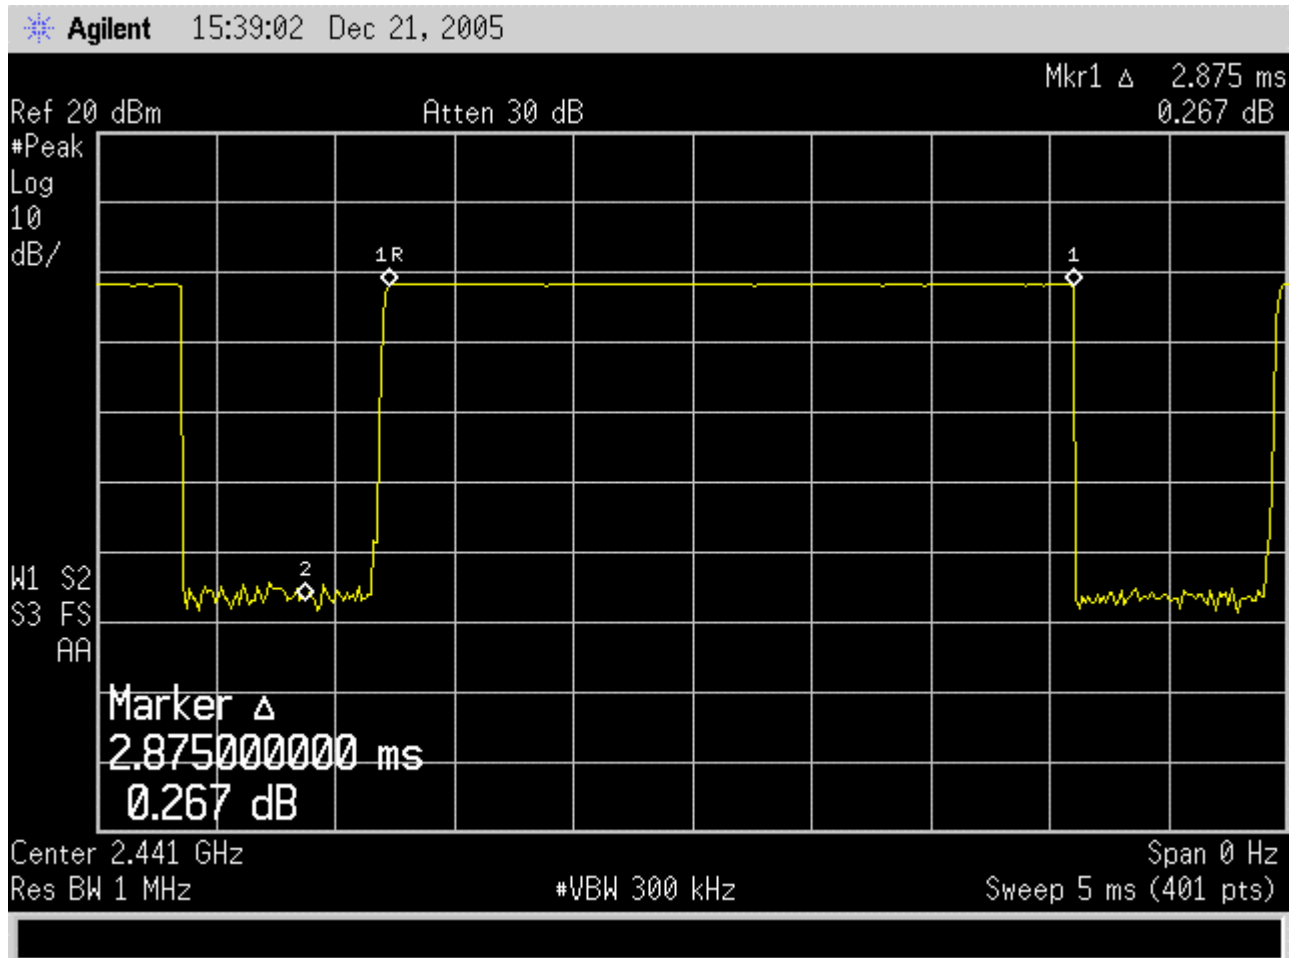

7.5 20dB Bandwidth

Test Mode and conditions

Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz),
DH5 packet with PRBS9 payload
Measurement Method : Conducted
Detector : PK
Trace : Max hold
RBW/VBW : 30kHz/100kHz

Requirements


Subclause 15.247(a)(1)

It is mentioned implicitly as the maximum 20dB bandwidth of the hopping channel is 1Mhz.


Test results

Operating frequency (MHz)	20dB Bandwidth (MHz)	Limit	Results
2402	0.830	< 1 Mhz	Pass
2441	0.830	< 1 Mhz	Pass
2480	0.810	< 1 Mhz	Pass


20dB Bandwidth Plot – 2402Mhz

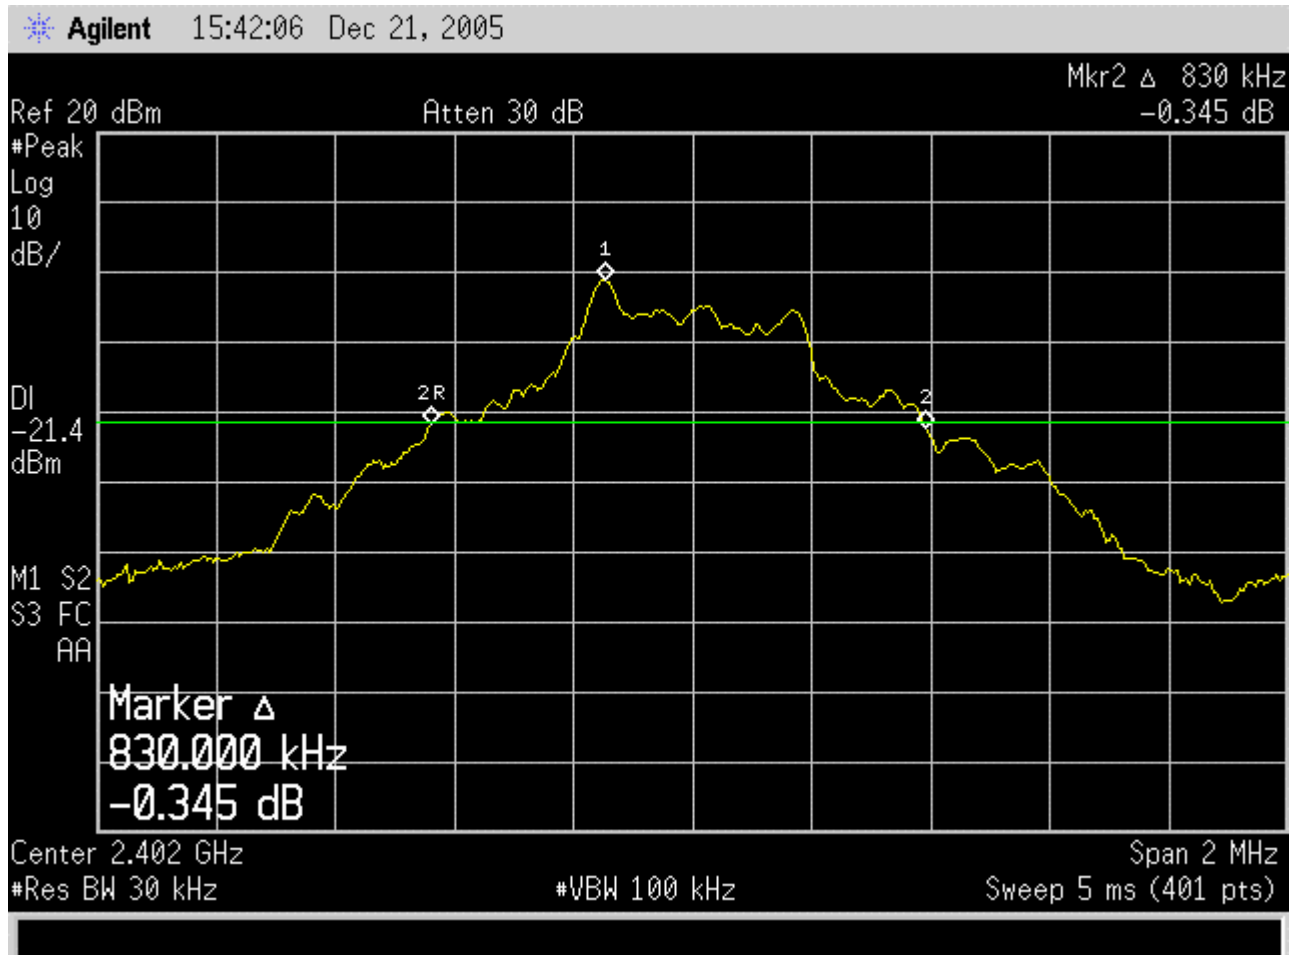

20dB Bandwidth Plot – 2441Mhz

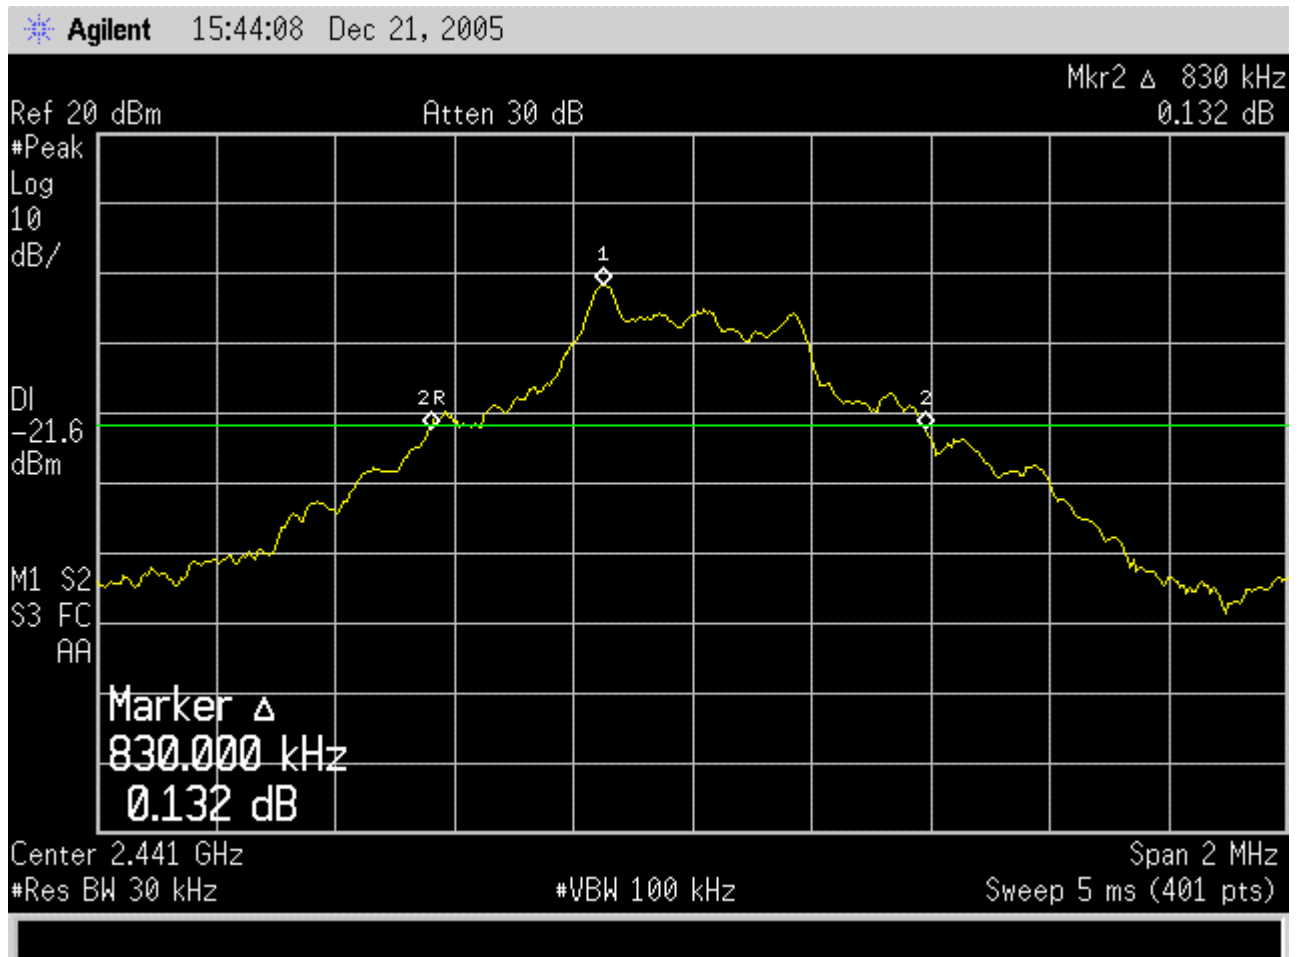

20dB Bandwidth Plot – 2480Mhz

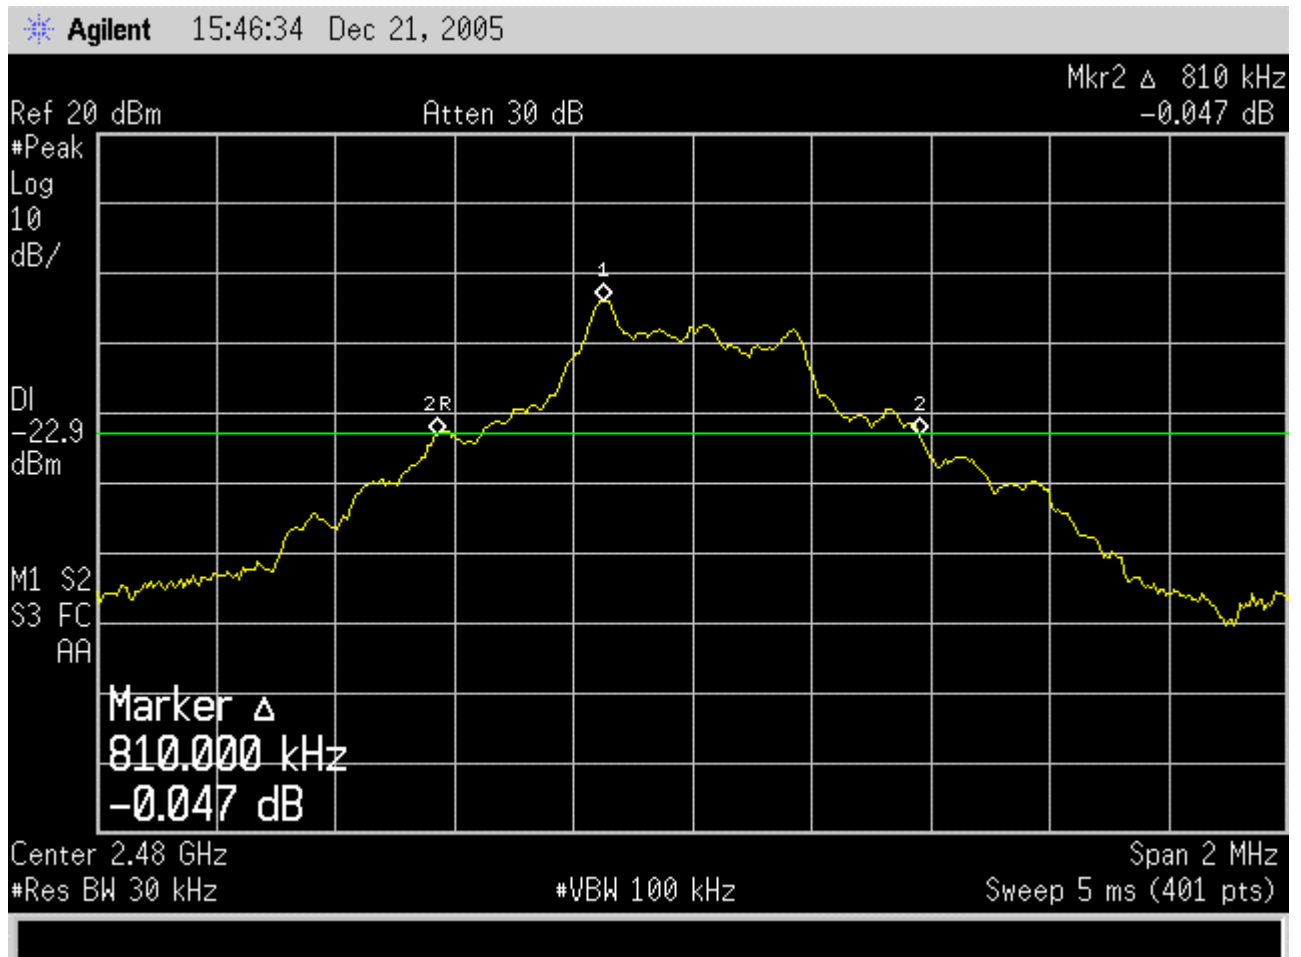

7.6 Number of Hopping Frequencies Requirements

Test Mode and conditions

Mode of operation : Hopping, DH1 with PRBS9 payload
Measurement Method : Conducted
Detector : PK
Trace : Max hold
RBW/VBW : 100kHz/100kHz

Requirements


15.247(a)(1)(iii)

Frequency hopping systems in the 2400-2483.5 Mhz band shall use at least 15 non-overlapping Channels.

Test results

Operating frequency (MHz)	Number of Hopping	Limit	Results
2402~2480	79	≥ 15	Pass

Number of Hopping Frequencies Plot

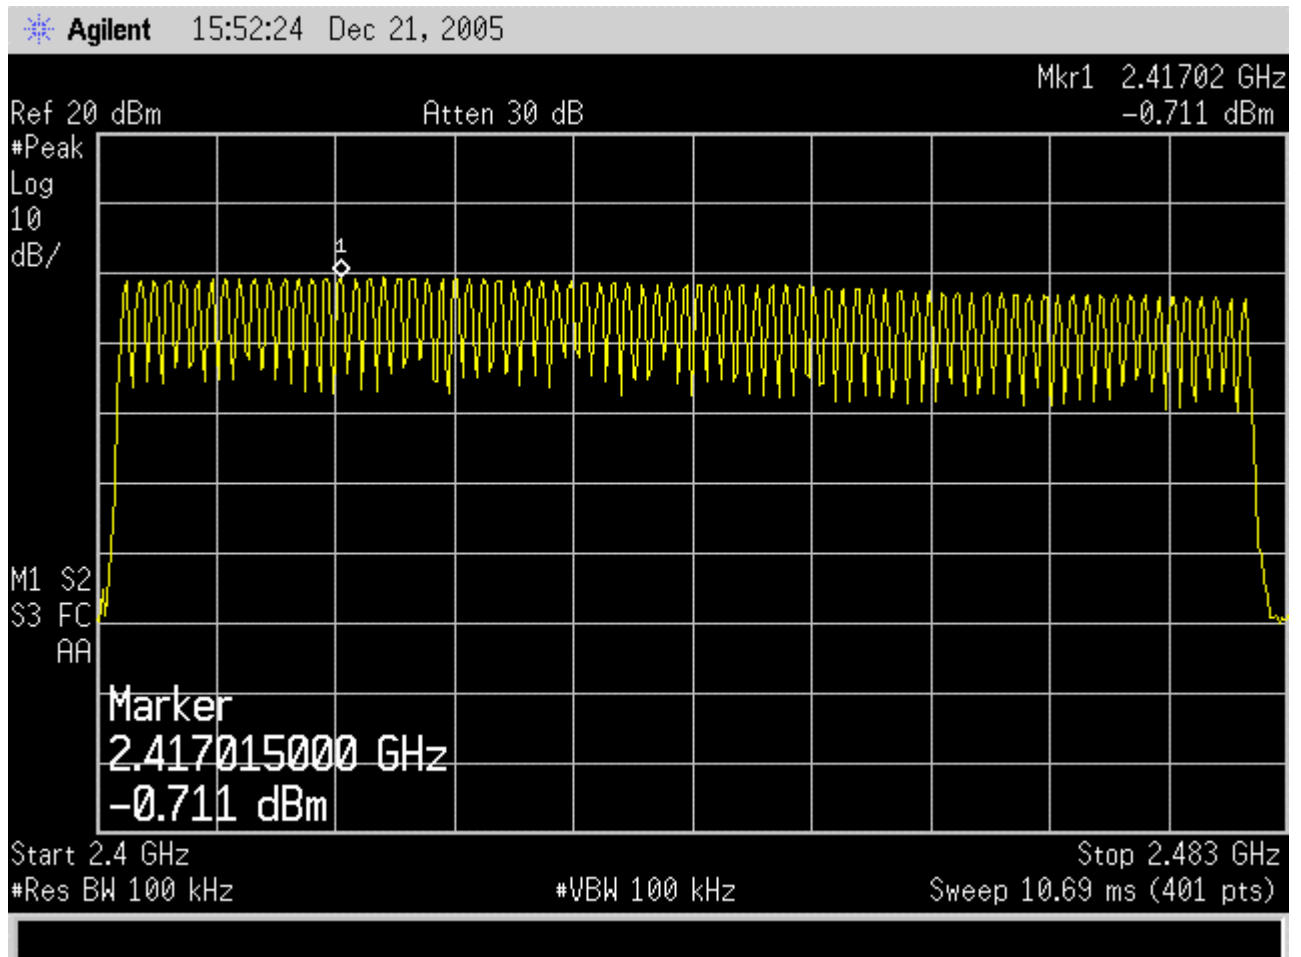

7.7 Pseudorandom FHS and Equal Hopping Frequency use Requirements

Requirements

Subclause 15.247 (a)(1)


The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter.

RESULT

Complies

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master. For details, refer to the figure 1. The X input determines the phase in the 32-hop segment, whereas Y1 and Y2 selects between master-to-slave and slave-to-master transmission. The inputs A to D determine the ordering within the segment, the inputs E and F determine the mapping onto the hop frequencies.

The algorithm in the Bluetooth specifications shows the each of its hopping channels is used equally on average also.

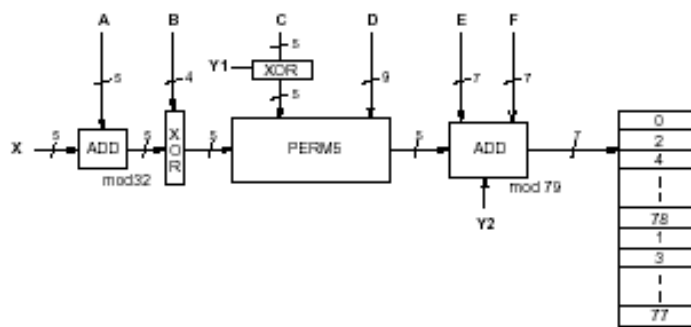

< Figure 1 : Block diagram of hop selection kernel for 79 hop system >

7.8 Receiver Input Bandwidth Requirements

Requirements

Subclause 15.247 (a)(1)

The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in the synchronization with the transmitted signals.

RESULT

Complies

The receiver bandwidth is equal to the receiver bandwidth in the 79 hopping channel mode, which is 1 MHz. The receiver bandwidth is indirectly verified during Bluetooth RF conformance testing.

7.9 Peak Output Power

Test Mode and conditions

Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz),
DH1 packet with PRBS 9 payload
Measurement Method : Conducted
Detector : PK
Trace : Max hold
RBW/VBW : 1MHz/3MHz

Requirements


Subclause 15.247(b)(1)

For frequency hopping systems operating in the 2400~2483.5 Mhz band employing at least 75hopping channels, the maximum output power of the intentional radiator shall not exceeded 1 watt.


Test results

Operating Frequency (MHz)	Reading (dBm)	Cable attenuation (dB)	Actual Value (W)	Limit (W)	Results
2402	-0.862	1.80	0.001241081	<1.0	Pass
2441	-1.205	1.83	0.001154800	<1.0	Pass
2480	-3.277	1.85	0.000719946	<1.0	Pass


Peak Output Power Plot - 2402

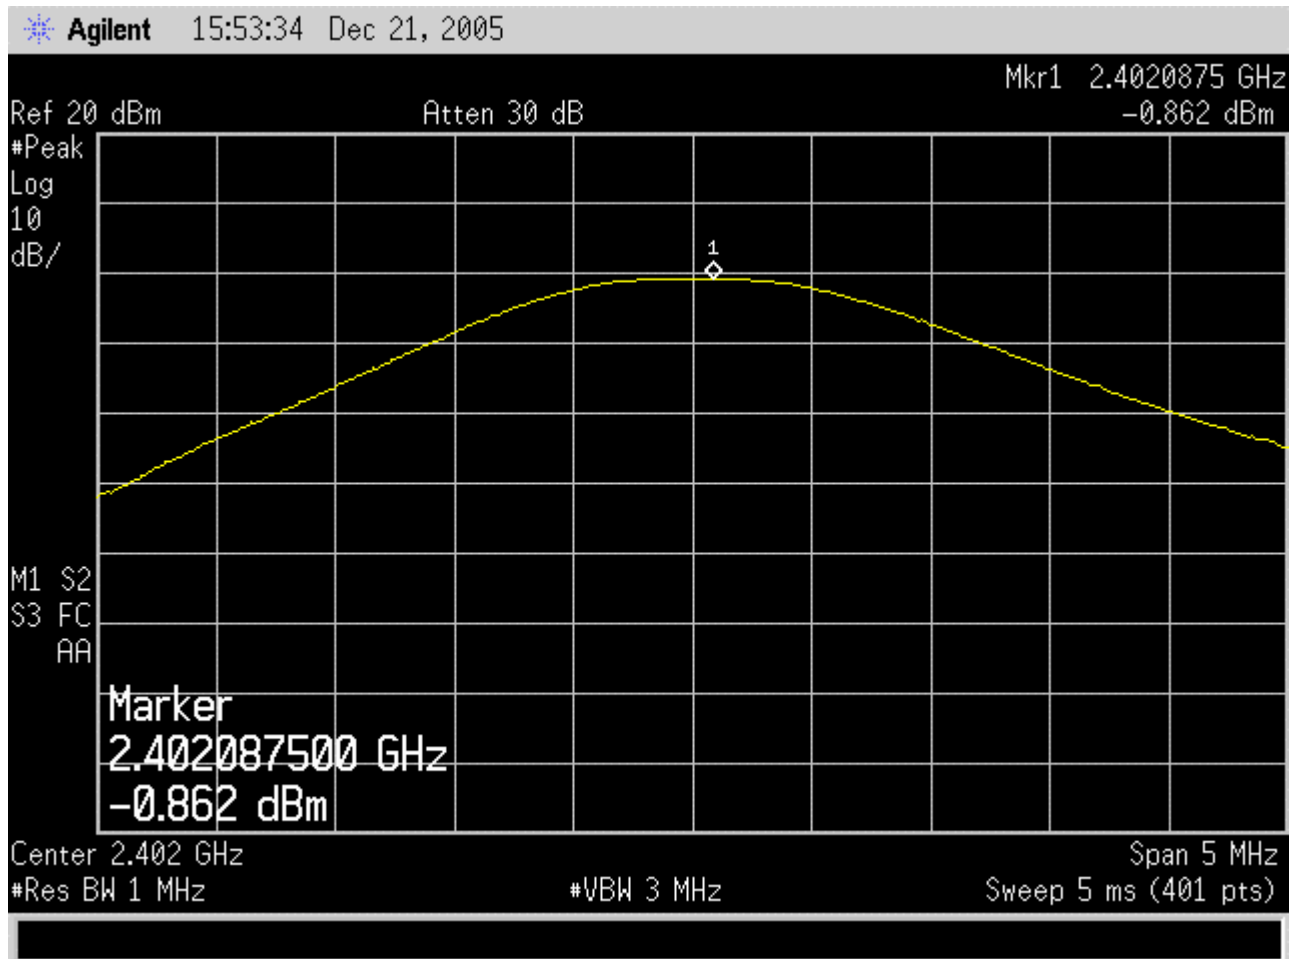

Peak Output Power Plot – 2441

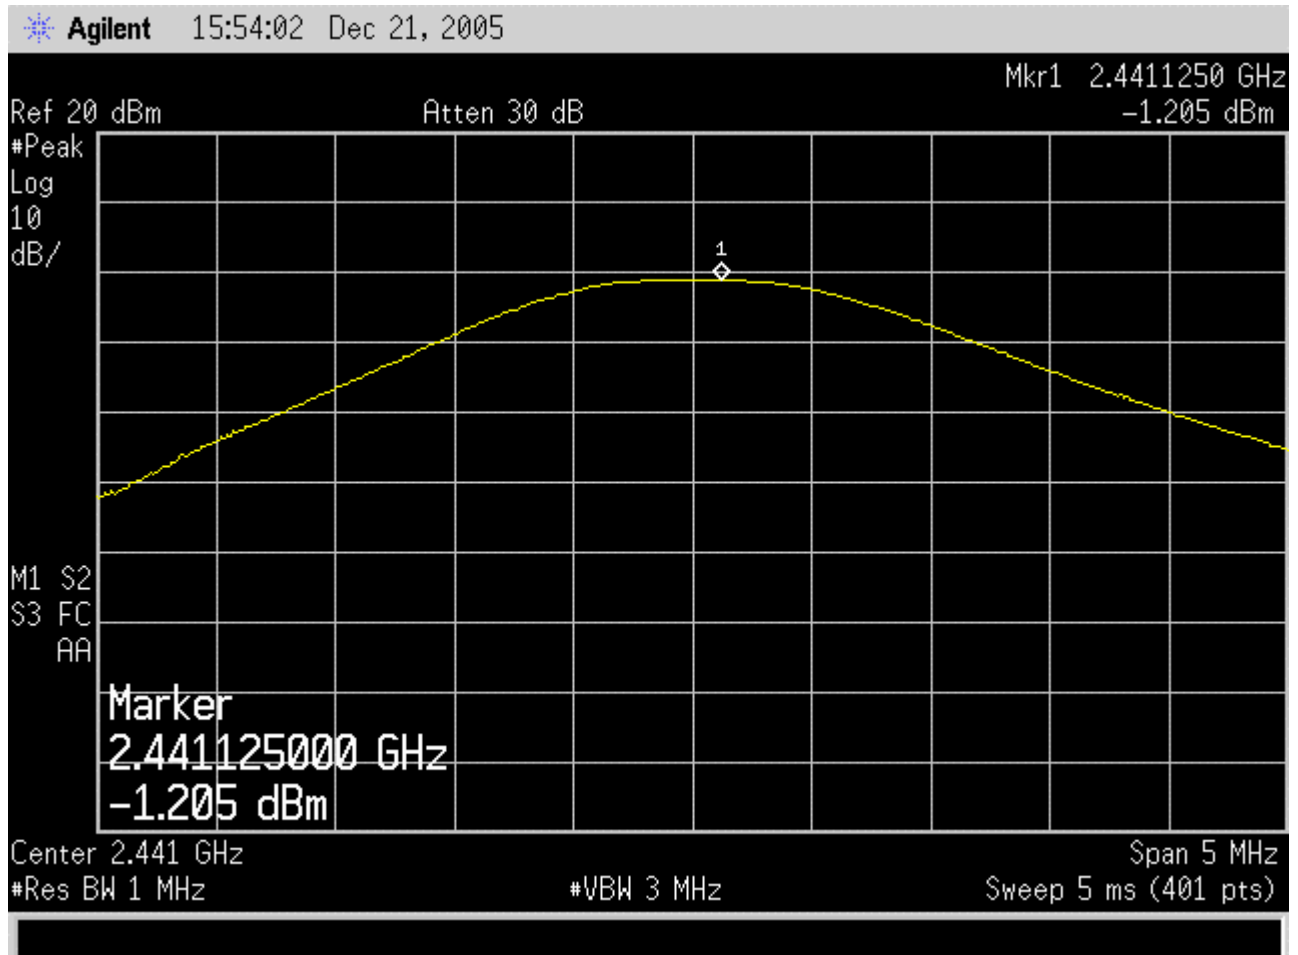

Peak Output Power Plot – 2480

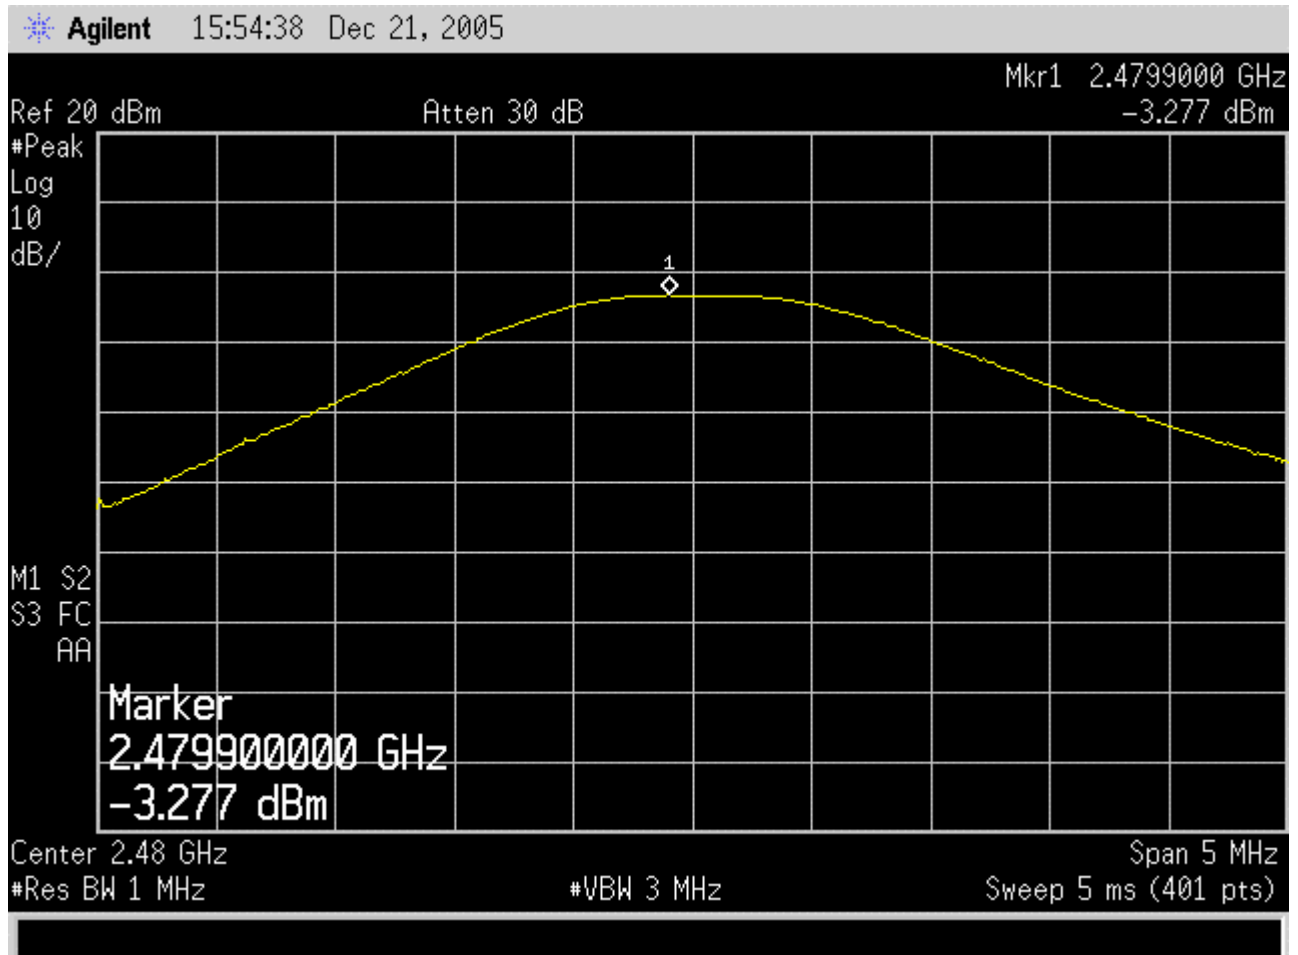

7.10 Band-edge Compliance

Test Mode and conditions

Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH1 packet
Measurement Method : Conducted
Detector : PK
Trace : Max hold
RBW/VBW : 300kHz/1.0MHz

Requirements

Subclause 15.247(c)


In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Test results


There is no peak found outside any 100kHz bandwidth of the operating frequency band in the three transmit frequency.

Tx Frequency (MHz)	RF power outside 100kHz BW (MHz)	Limit	Results
2402	No peak above 20dB	20dB below	Pass
2441	No peak above 20dB	20dB below	Pass
2480	No peak above 20dB	20dB below	Pass


Band-edge Compliance Plot - 2402

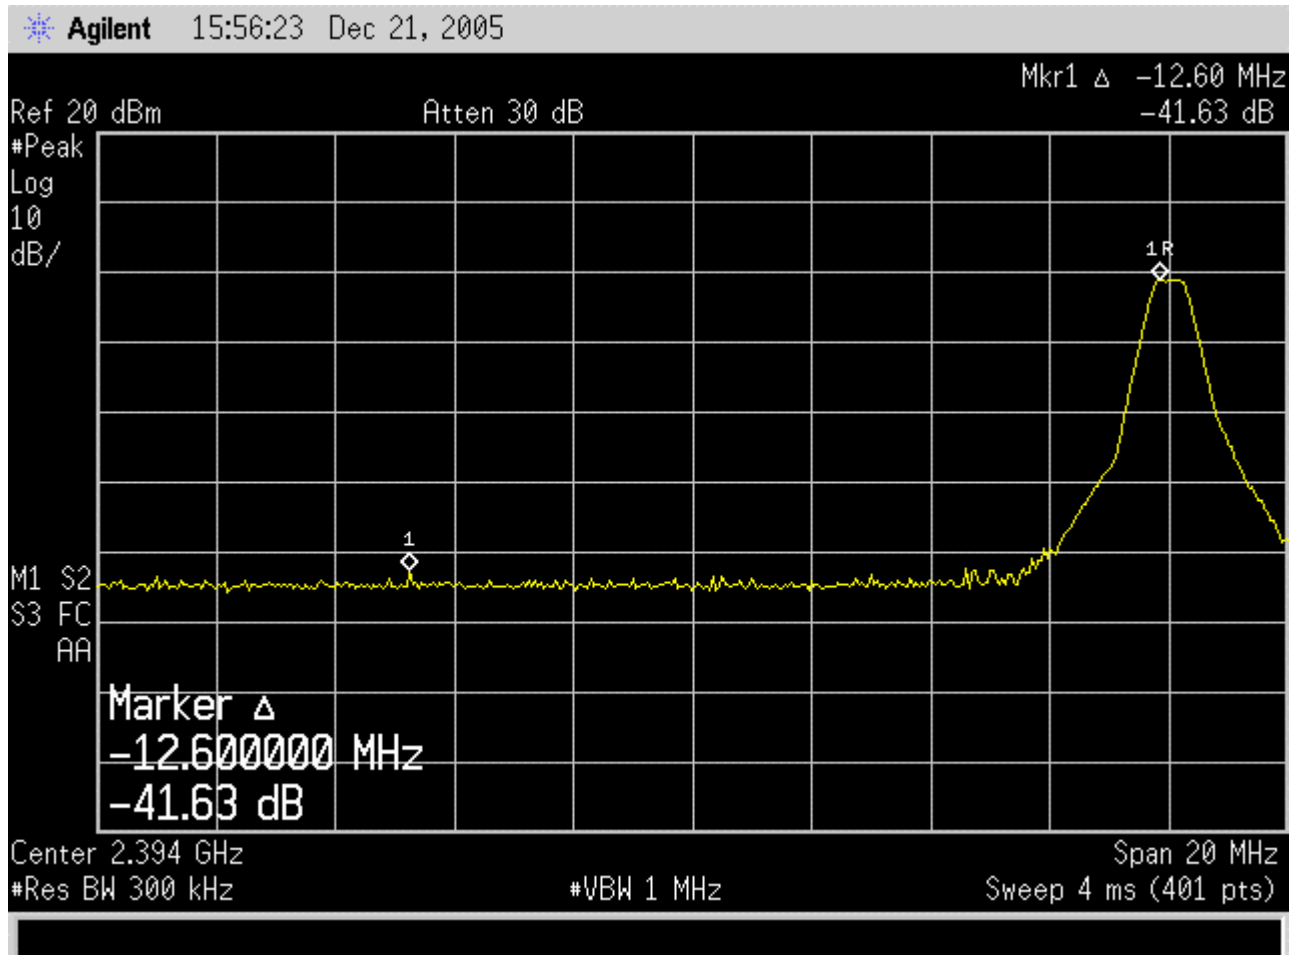

Band-edge Compliance Plot – 2441

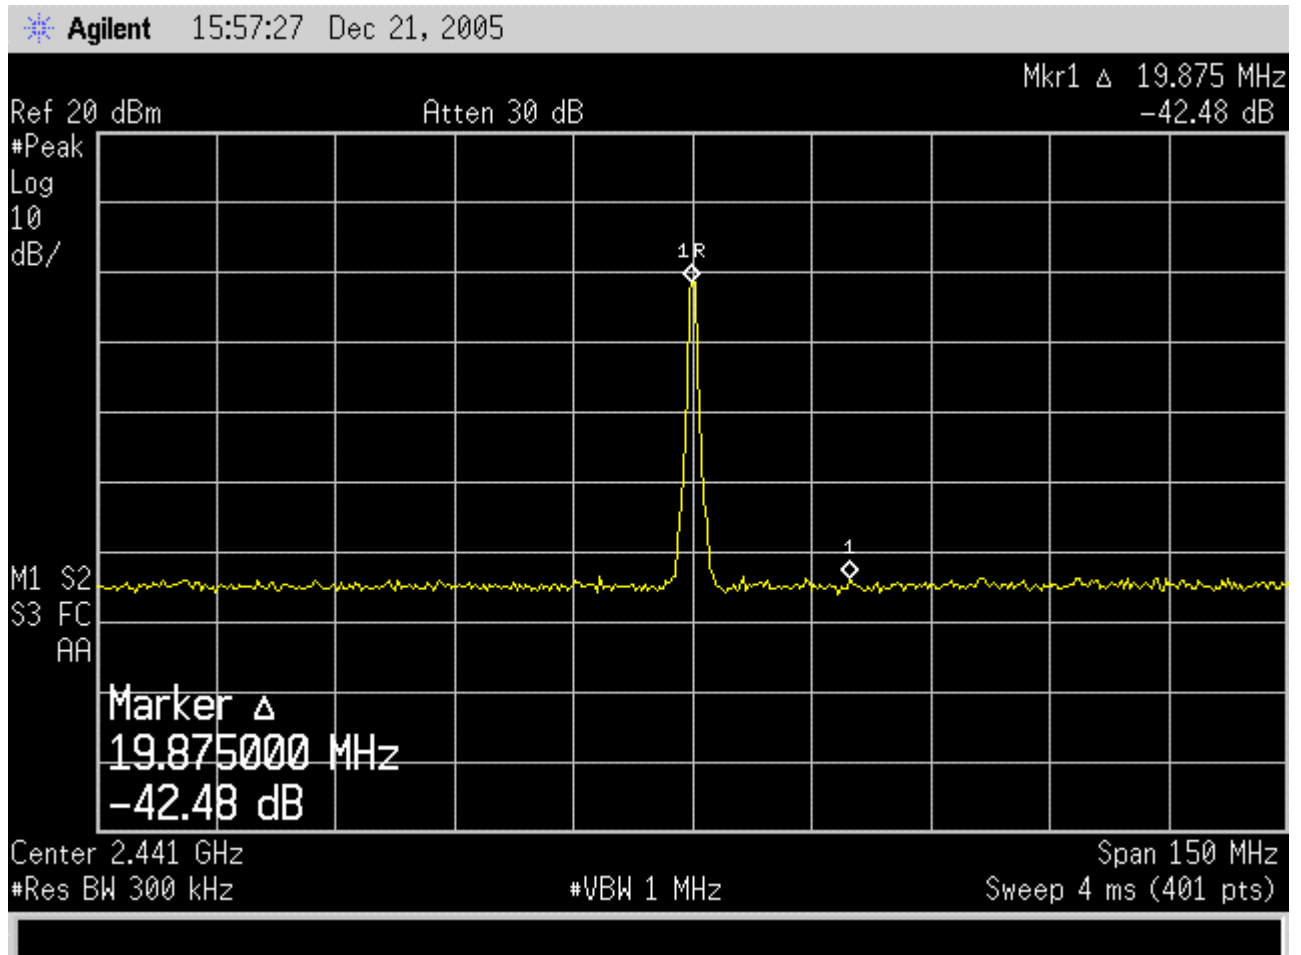

Band-edge Compliance Plot – 2480

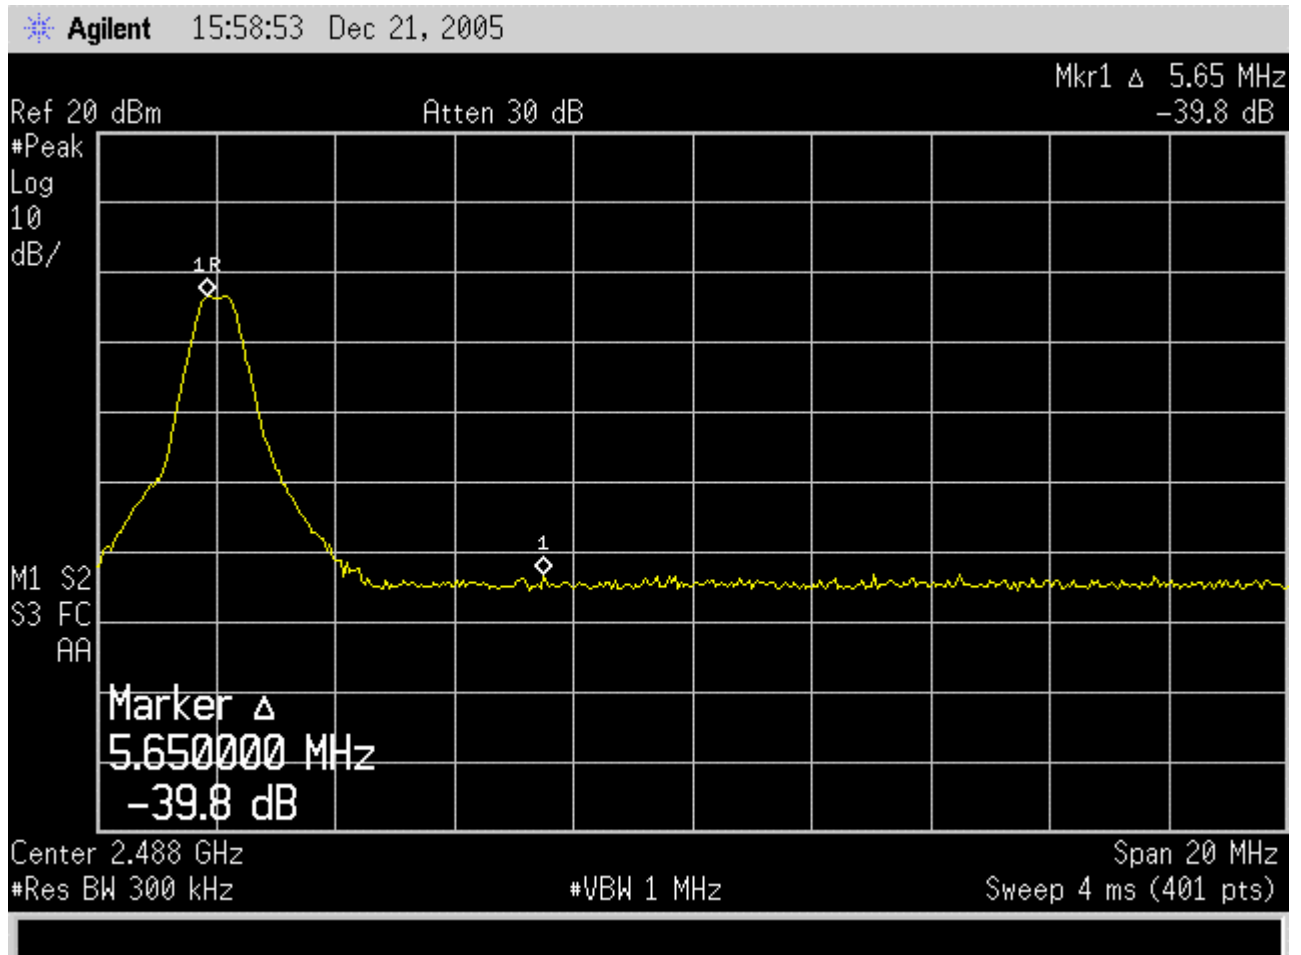

7.11 Spurious Conducted emissions

Test Mode and conditions

Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), DH1 packet
Measurement Method : Conducted
Detector : PK
Trace : Max hold
RBW/VBW : 100kHz/300kHz

Requirements

Subclause 15.247(c)

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.


Test results

Frequency (MHz)	Reading Value (dBm)	Correction Factor (dB)	Results (dBm)	Reference Value (dBm)	Delta to Reference (dB)
<i>Operating frequency : 2402MHz</i>					
4816	-37.58	3.4	-34.18	-20.862	13.318
13650	-43.84	6.0	-37.84	-20.862	16.978
24637.5	-42.73	6.7	-36.03	-20.862	15.168


Frequency (MHz)	Reading Value (dBm)	Correction Factor (dB)	Results (dBm)	Reference Value (dBm)	Delta to Reference (dB)
<i>Operating frequency : 2441MHz</i>					
4890	-39.73	3.4	-36.33	-21.205	15.13
13175	-44.67	6.0	-38.67	-21.205	17.465
21312.5	-44.93	6.7	-38.23	-21.205	17.025

Frequency (MHz)	Reading Value (dBm)	Correction Factor (dB)	Results (dBm)	Reference Value (dBm)	Delta to Reference (dB)
<i>Operating frequency : 2480MHz</i>					
4965	-40.97	3.4	-37.57	-23.277	14.293
13350	-44.46	6.0	-38.46	-23.277	15.183
24650	-43.06	6.7	-36.36	-23.277	13.083


Spurious Conducted emissions plot- 2402 (30MHz~10GHz)

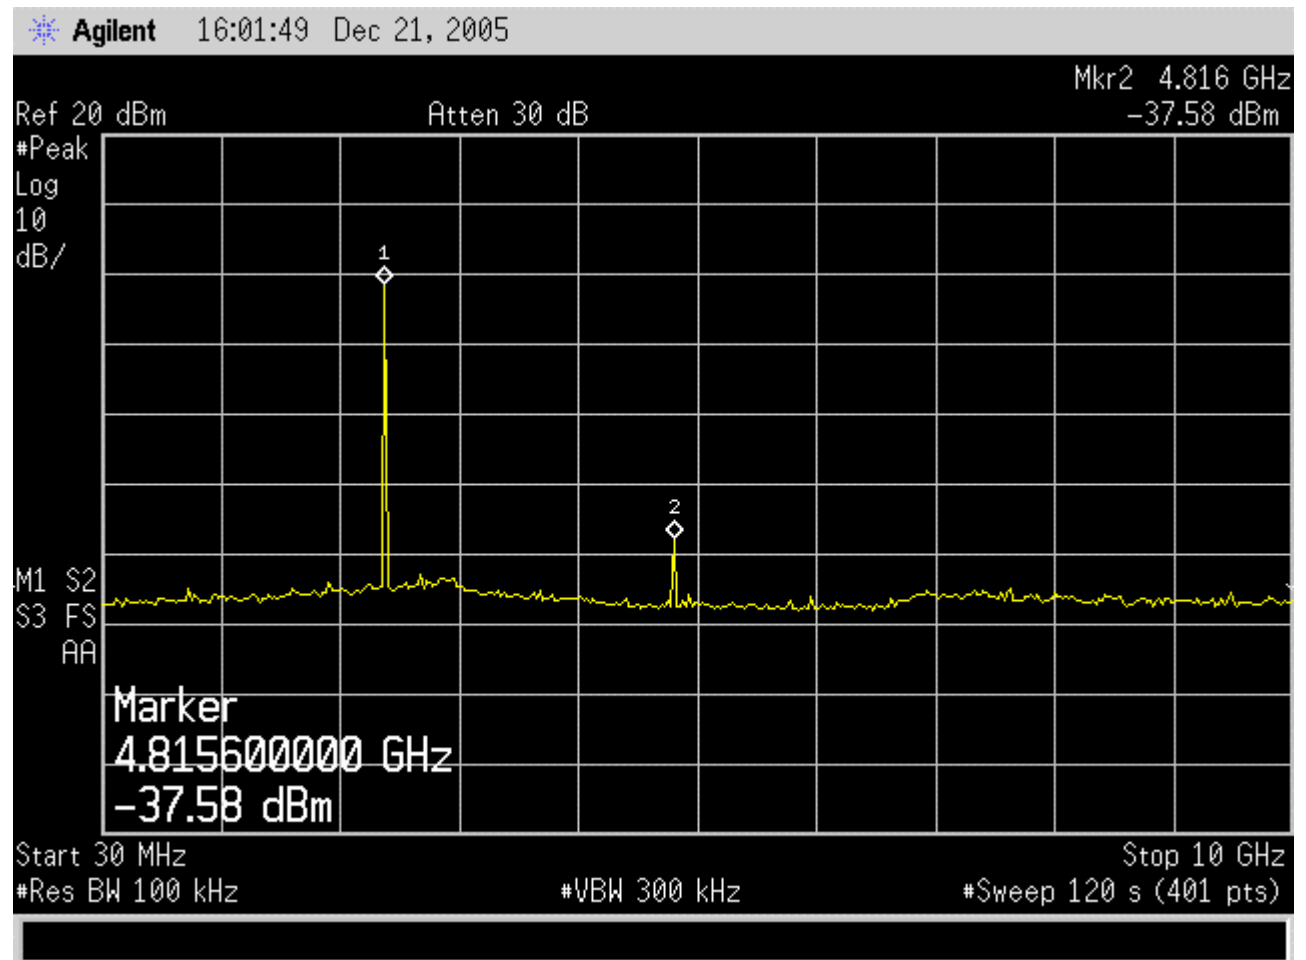


Spurious Conducted emissions plot- 2402 (10GHz~20GHz)

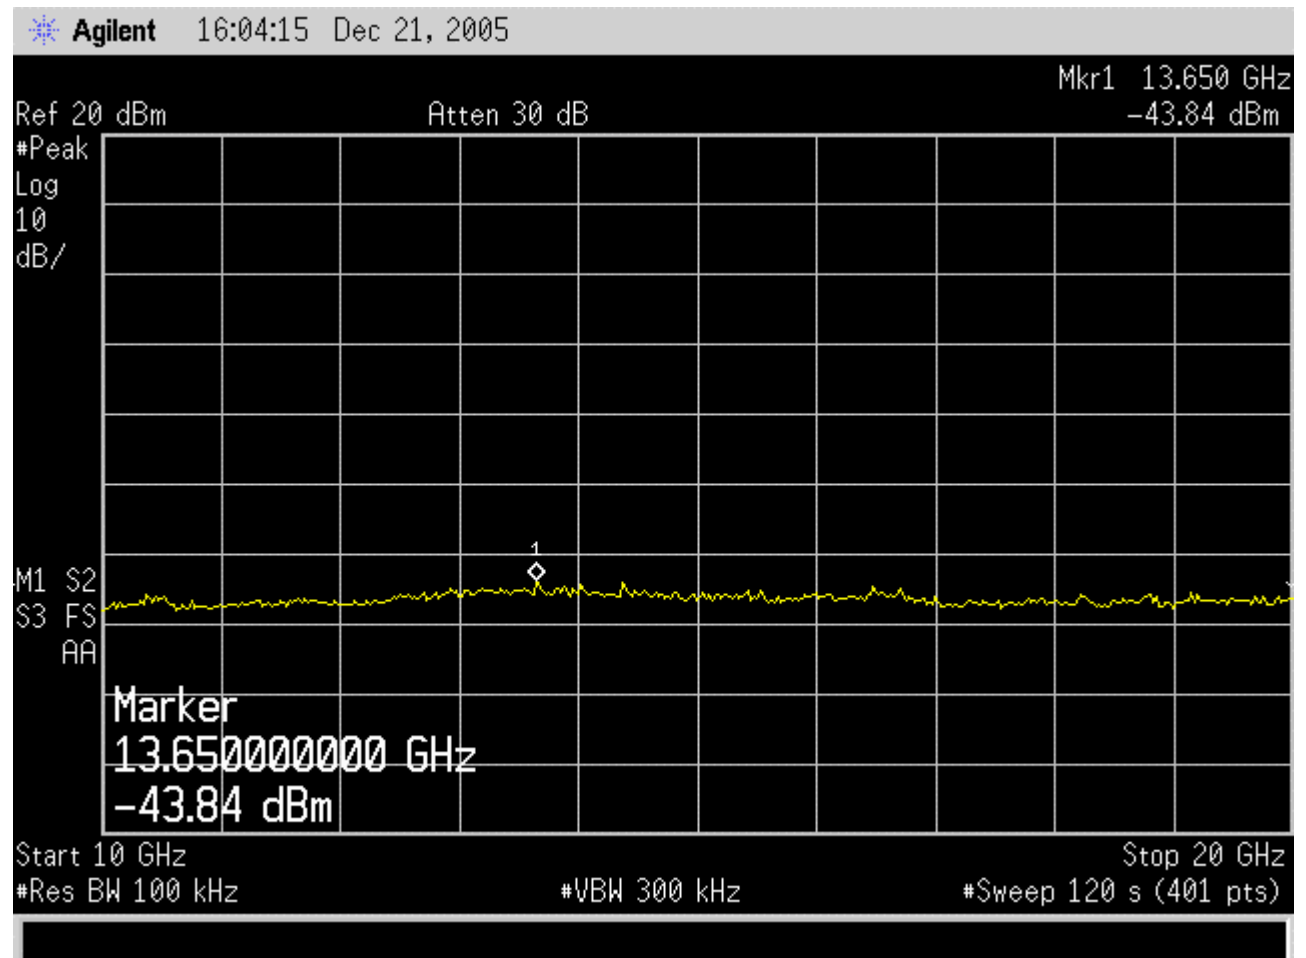


Spurious Conducted emissions plot- 2402 (20GHz~25GHz)

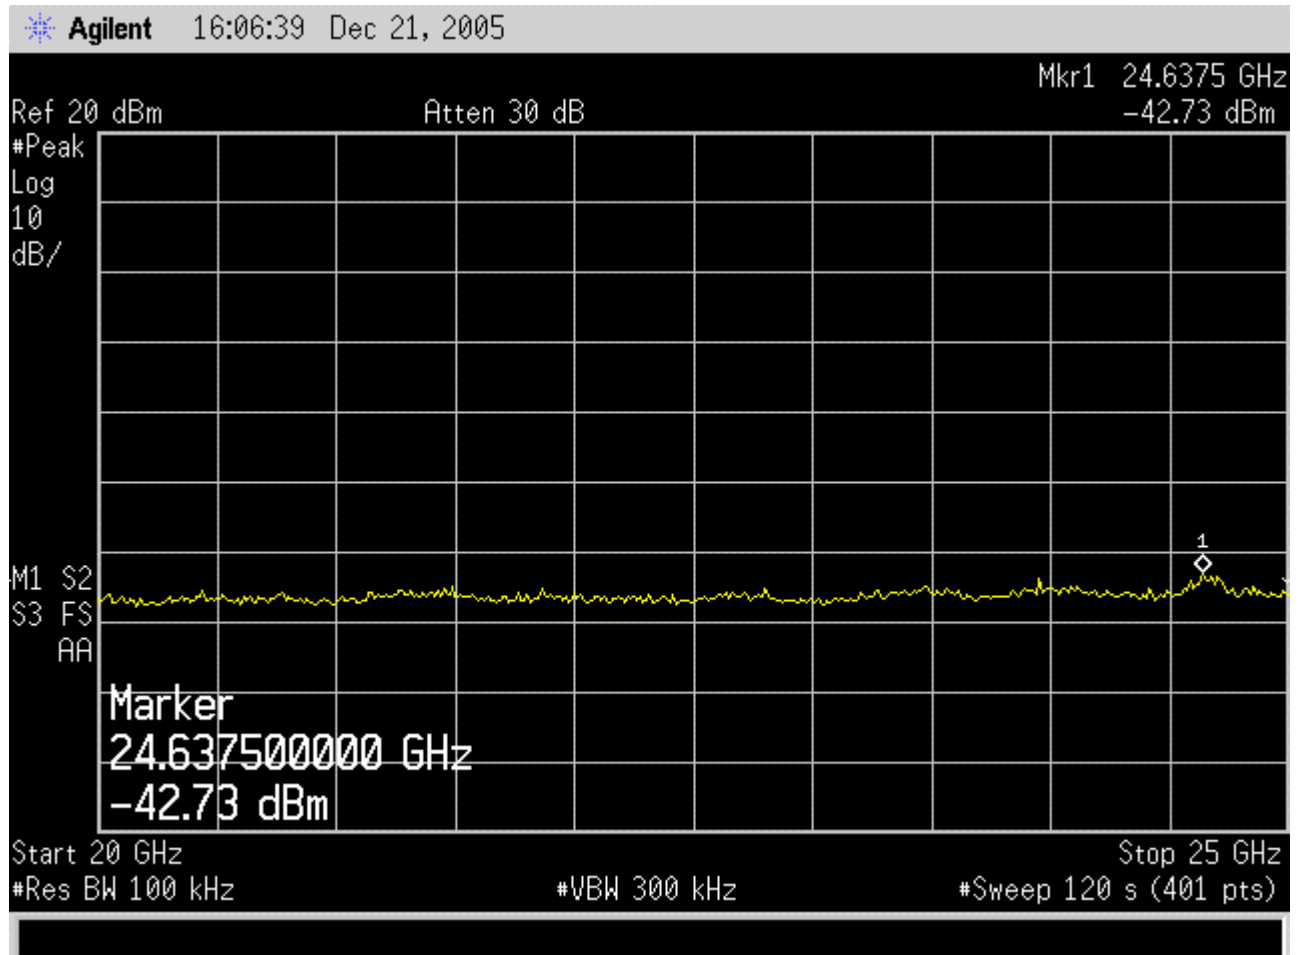


Spurious Conducted emissions plot- 2441 (30MHz~10GHz)

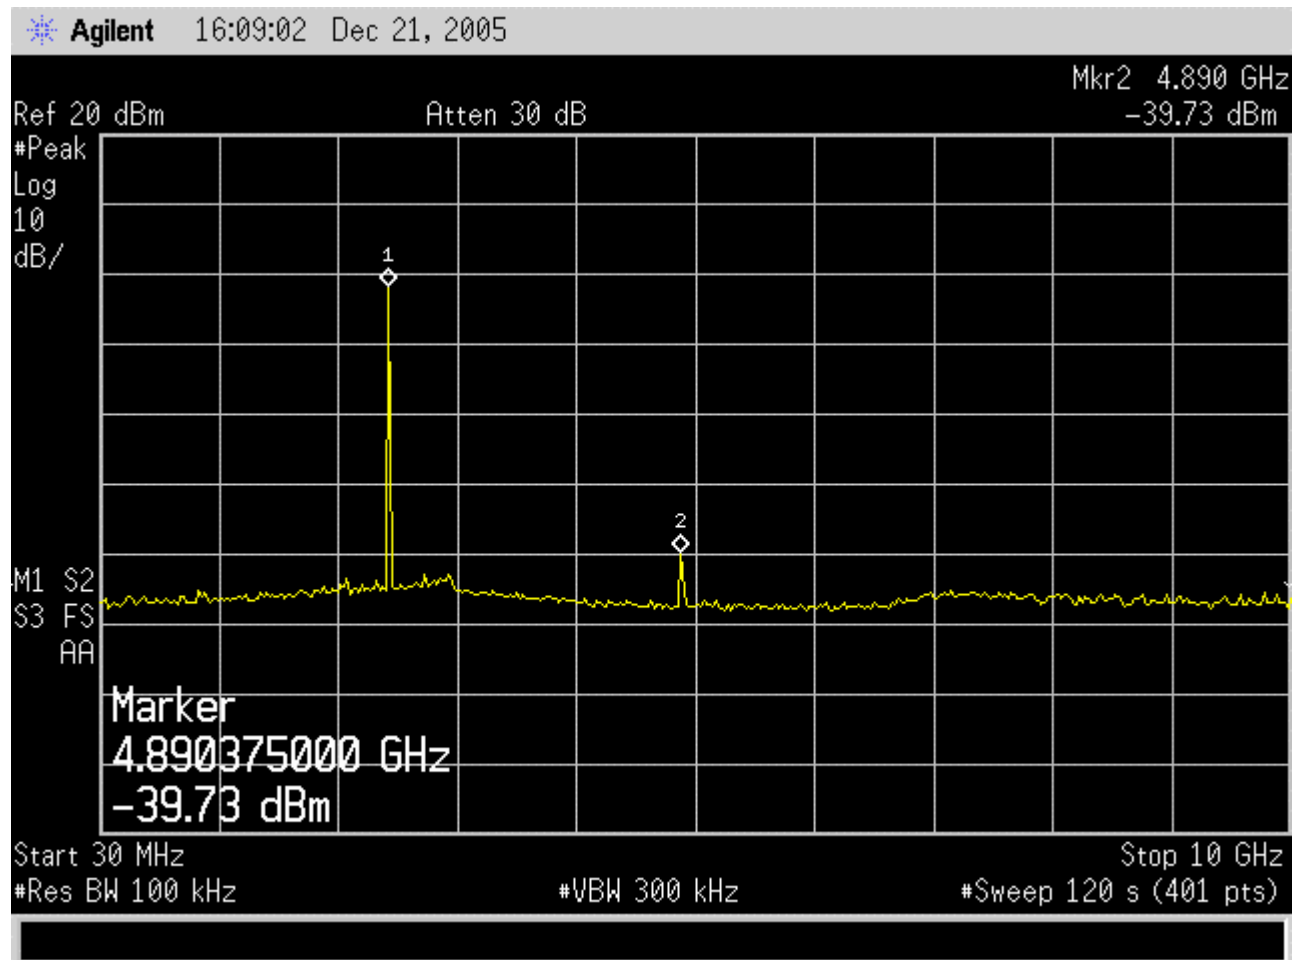


Spurious Conducted emissions plot- 2441 (10GHz~20GHz)

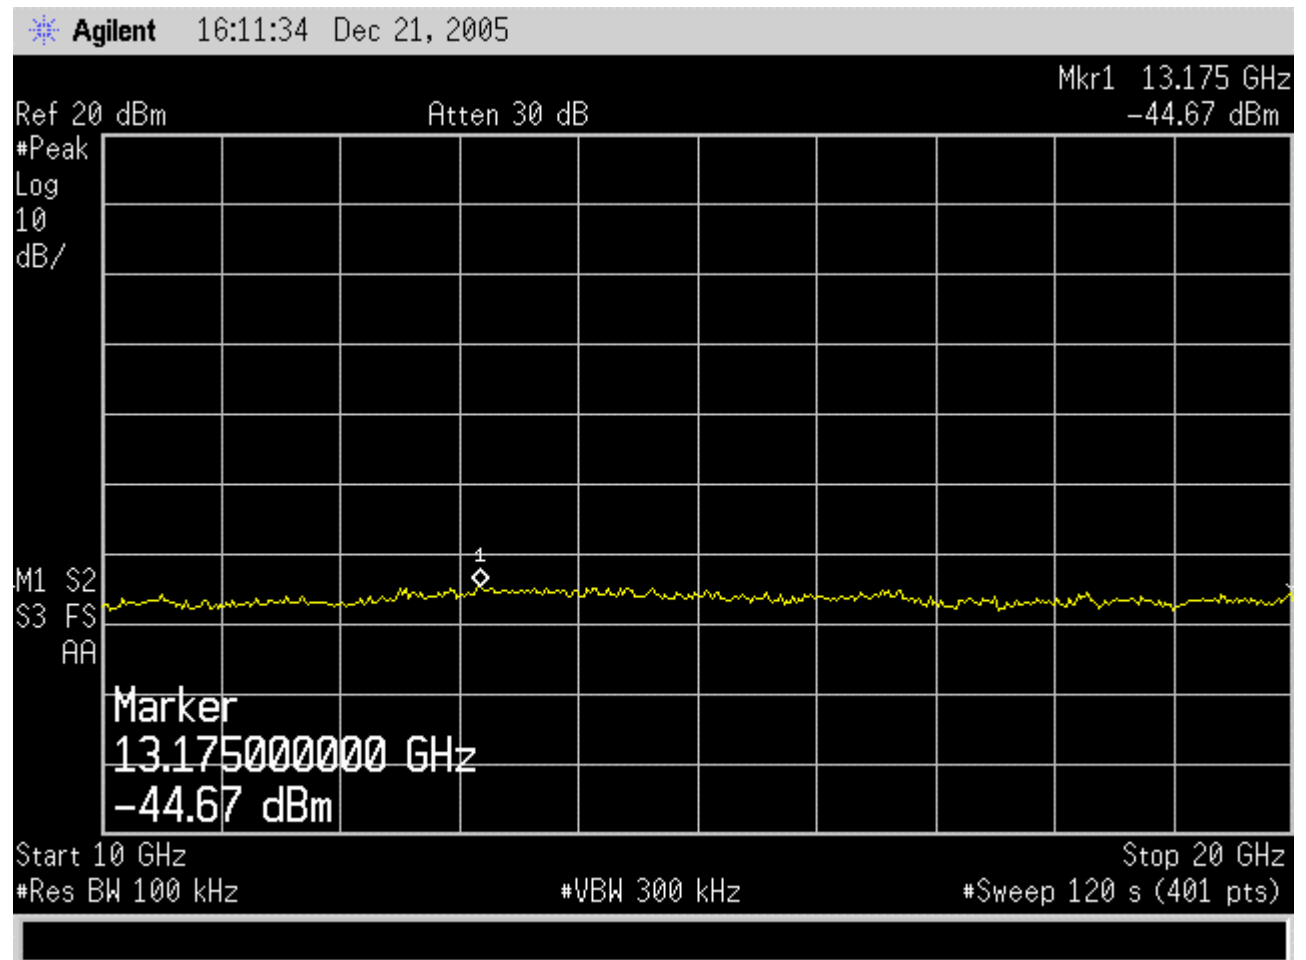


Spurious Conducted emissions plot- 2441 (20GHz~25GHz)

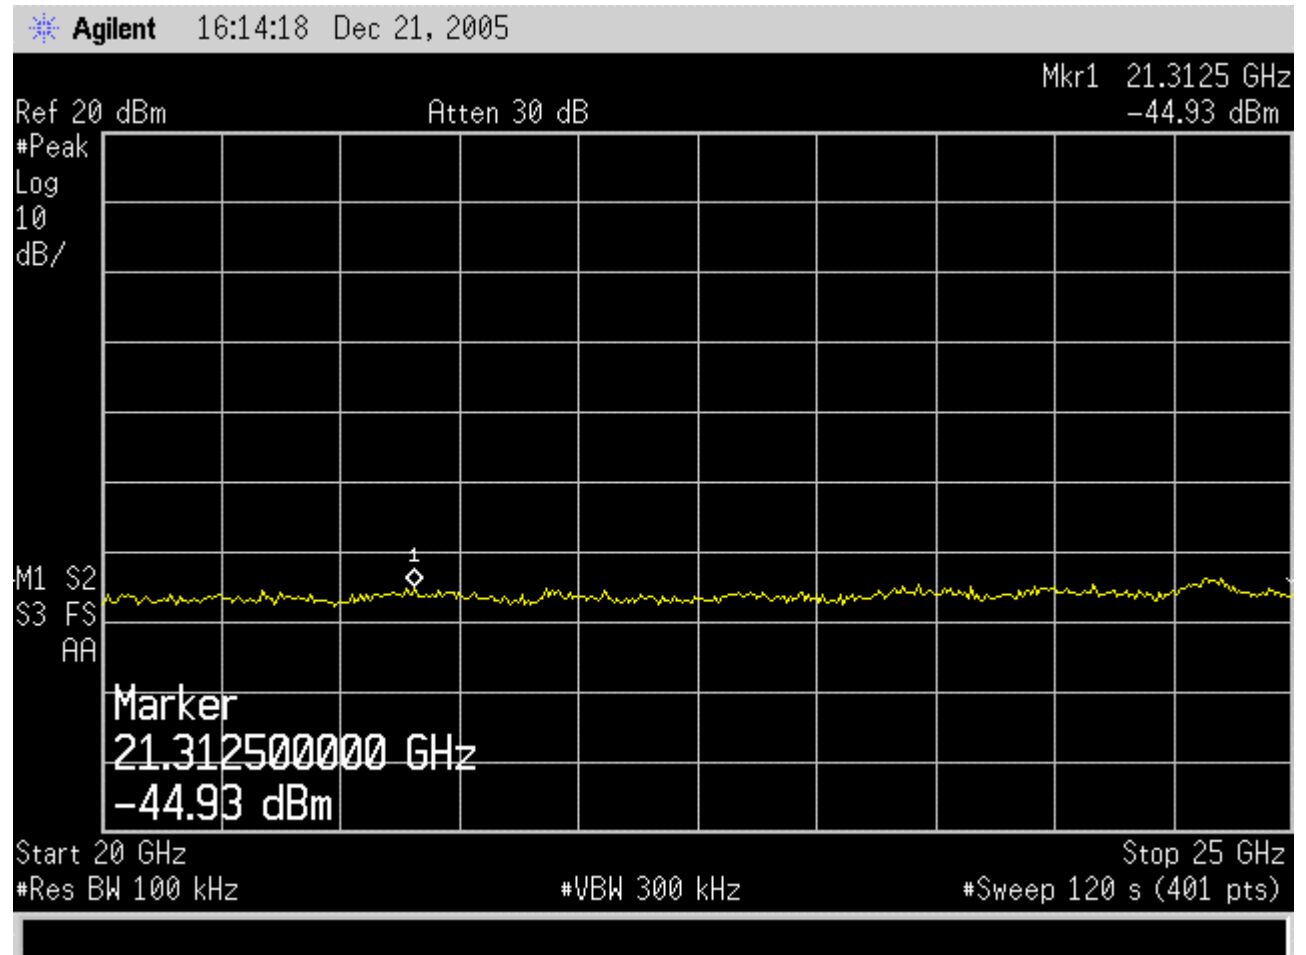


Spurious Conducted emissions plot- 2480 (30MHz~10GHz)

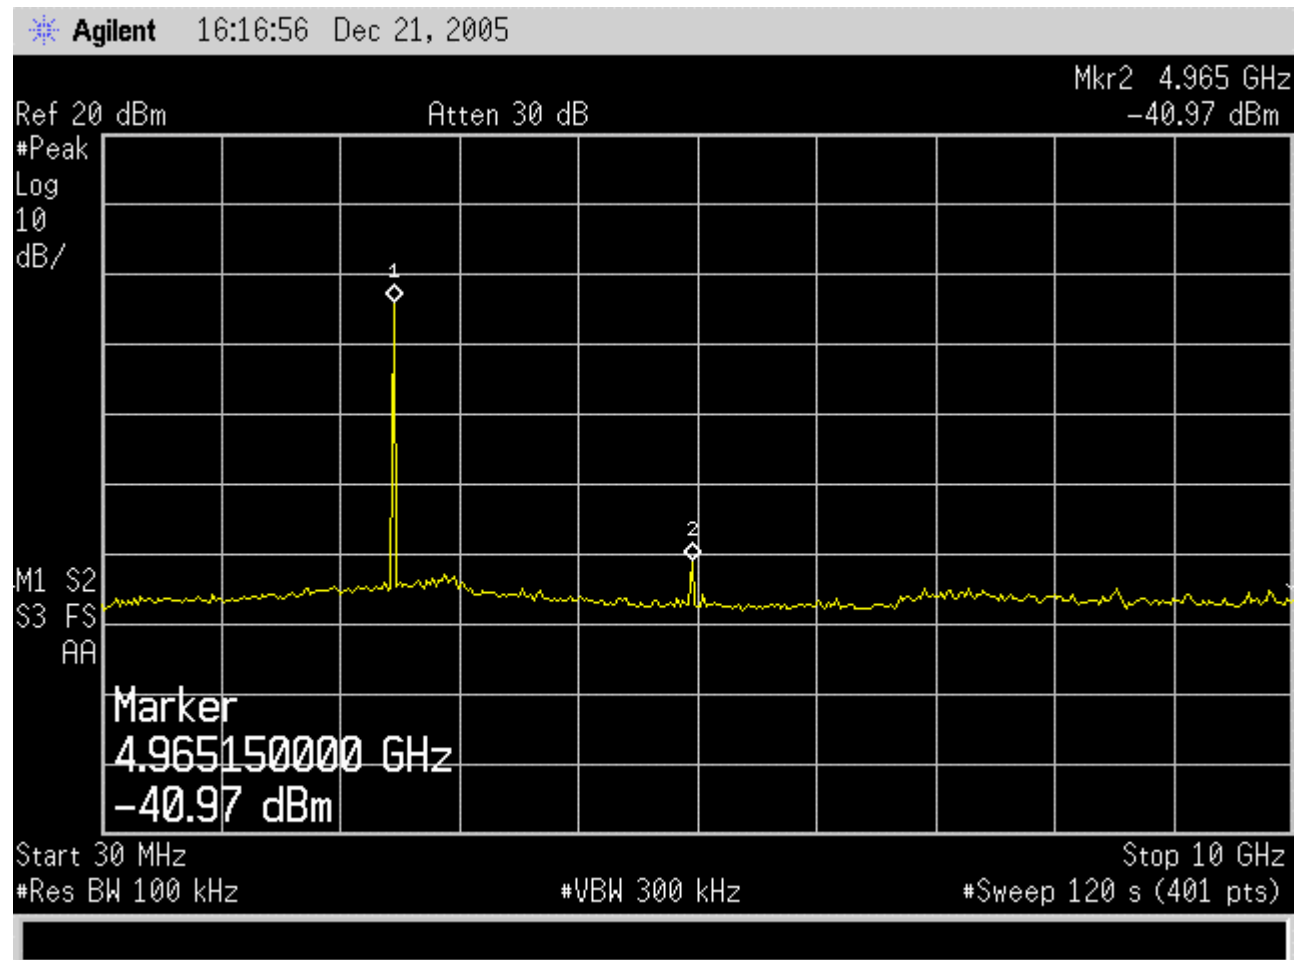

Spurious Conducted emissions plot- 2480 (10GHz~20GHz)

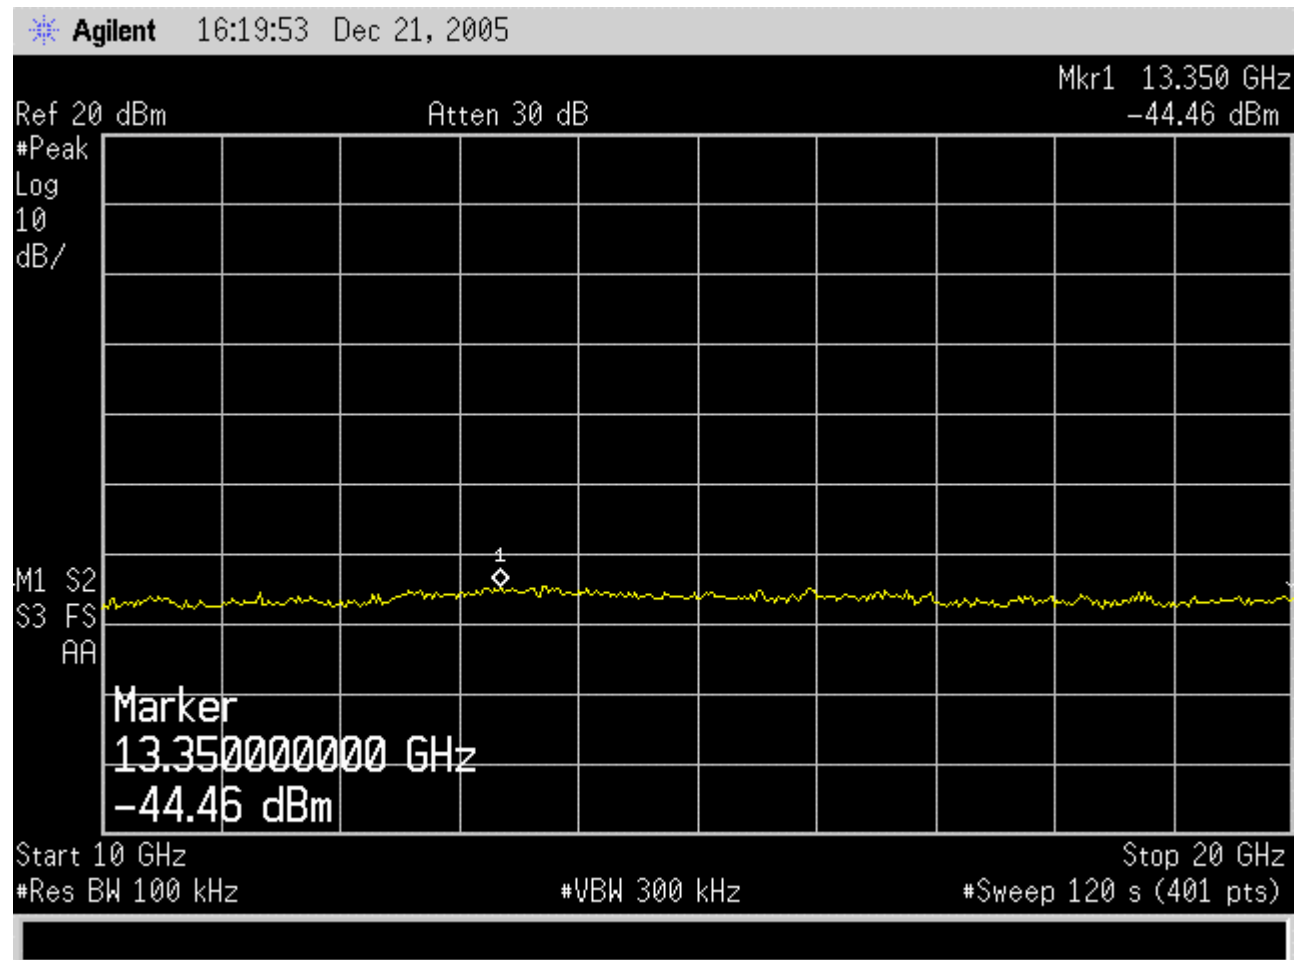

Spurious Conducted emissions plot- 2480 (20GHz~25GHz)

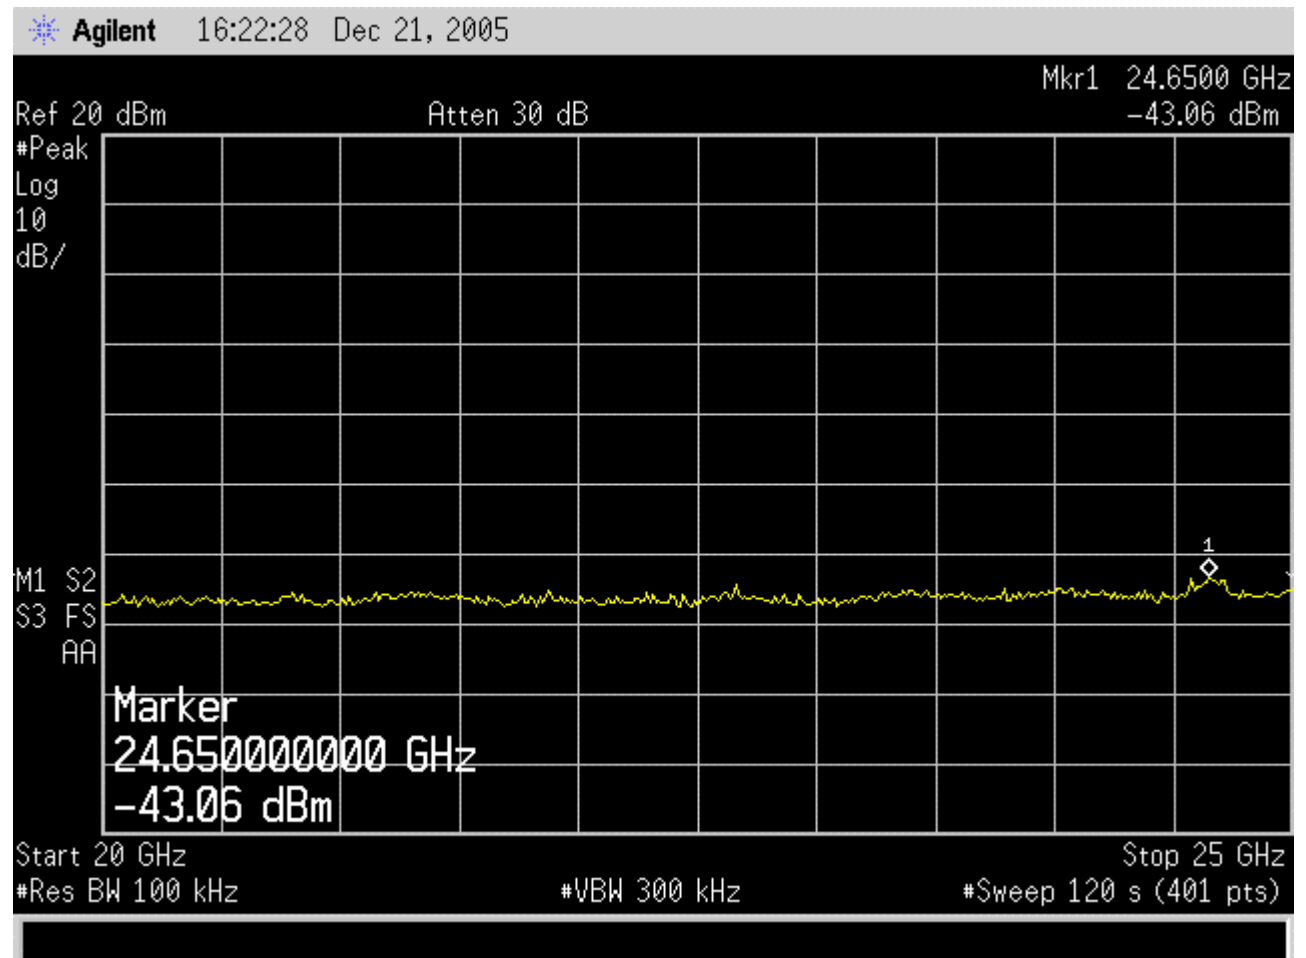

7.12 Spurious Radiated emissions

Test Mode and conditions

Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz),
DH1 packet
Detector : PK
Trace : Max hold
Measurement Method : Radiated- Enclosure
Measurement Distance : 3m
Measurement BW : 1 MHz for $f \geq 1$ GHz, 100kHz for $f < 1$ GHz

Requirements

Subclause 15.247(c)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to Section 15.209(a) , except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Field strength (dB μ V/m)	Measurement distance (meters)
30-88	100**	$20 \cdot \log(100) = 40.0$	3
88-216	150**	$20 \cdot \log(150) = 43.5$	3
216-960	200	$20 \cdot \log(200) = 46.0$	3
960-2500	500	$20 \cdot \log(500) = 54.0$	3

** Except as provided in paragraph(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72Mhz, 76-88Mhz, 174-216Mhz or 470-806Mhz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

According to section 15.35(b), on any frequency or frequencies above 1000 MHz the radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. When average radiated emission measurements are specified in this part, including emission measurements below

1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated

Test results

Frequency (MHz)	Polariz- ation (H/V)	Corr. Factor (dB)	Result (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Table Angle (Deg.)	Ant. Height (m)
			A	P	A	P	A	P		
Operating frequency : 2402Mhz										
4800	V	16.8	36.5	59.0	54	74	17.5	15.0	90	1.70
7204	V	21.2	36.7	51.7	54	74	17.3	22.3	90	1.70
4800	H	16.8	40.2	55.1	54	74	13.8	18.9	180	1.30
7204	H	21.2	40.8	58.9	54	74	13.2	15.1	180	1.30

Frequency (MHz)	Polariz- ation (H/V)	Corr. Factor (dB)	Result (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Table Angle (Deg.)	Ant. Height (m)
			A	P	A	P	A	P		
Operating frequency : 2441Mhz										
4872	V	17.0	35.1	60.1	54	74	18.9	13.9	90	1.70
4872	H	17.0	35.5	54.0	54	74	18.5	20.0	180	1.30
7325	H	21.5	38.0	50.8	54	74	16.0	23.2	180	1.30
9776	H	25.2	39.5	54.2	54	74	14.5	19.8	180	1.30

Frequency (MHz)	Polarization (H/V)	Corr. Factor (dB)	Result (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Table Angle (Deg.)	Ant. Height (m)
			A	P	A	P	A	P		
Operating frequency : 2480Mhz										
4960	V	17.5	36.9	63.7	54	74	17.1	10.3	90	1.70
7445	V	22.2	37.4	53.5	54	74	16.6	20.5	90	1.70
4960	H	17.5	38.6	64.1	54	74	15.4	9.9	180	1.30
7445	H	22.2	37.6	58.8	54	74	16.4	15.2	180	1.30

Note :

1. Remark “*” means that the emission frequency is produced by local oscillator.
2. Remark “-” means that the emission level is too low to be measured.
3. The measurement uncertainty of the radiated emission test is $\pm 3\text{dB}$
4. “A” and “P” mean average and peak measurement respectively.
5. There are no spurious emissions found between the lowest internal oscillating frequency and 30 MHz.

8. List of Test and Measurement Instruments

	Kind of Equipment	Type	Manufacturer	S/N
<input checked="" type="checkbox"/>	EMI Test Receiver	ESMI	R/S	1032.5510.53
<input checked="" type="checkbox"/>	Spectrum Analyzer	FSP30	R/S	1093.4495.30
<input type="checkbox"/>	Tracking Generator	ESMI-B1	R/S	1033.3240.52
<input type="checkbox"/>	Spectrum Analyzer	8566B	HP	3638A0857E
<input checked="" type="checkbox"/>	Spectrum Analyzer	E4407B	HP	MY41310181
<input type="checkbox"/>	Wave Dipole Antenna	HZ-12	R/S	842006/0012
<input type="checkbox"/>	Wave Dipole Antenna	HZ-12	R/S	846556/0004
<input checked="" type="checkbox"/>	Biconical Antenna	3104C	EMCO	9408-4667
<input type="checkbox"/>	Biconical Antenna	3109	EMCO	9405-2812
<input checked="" type="checkbox"/>	Log-Periodic Antenna	3146A	EMCO	1064
<input type="checkbox"/>	Biconilog Antenna	3142	EMCO	9710-1220
<input type="checkbox"/>	V-Network	ESH3-Z5	R/S	847265/030
<input type="checkbox"/>	V-Network	ESH3-Z6	R/S	847250/016
<input type="checkbox"/>	T-Network	E-Z10	R/S	84480/011
<input checked="" type="checkbox"/>	LISN	6338-5-PJ-50-N	Solar	953938/953939
<input checked="" type="checkbox"/>	Turn Table	2081	EMCO	
<input checked="" type="checkbox"/>	Antenna Tower	2075	EMCO	
<input checked="" type="checkbox"/>	Multi Device Controller	2090	EMCO	9708-1255
<input type="checkbox"/>	Printer	C4569A	HP	SG78K1H1FS
<input type="checkbox"/>	Absorbing Clamp	MDS 21	R/S	847905/005
<input type="checkbox"/>	Signal Generator	2023	MARCONI	112246067
<input type="checkbox"/>	Swept Signal Generator	83620B	HP	3722A00549
<input type="checkbox"/>	10dB Attenuator	23-10-34	Weinschel co	BD4316
<input type="checkbox"/>	10dB Attenuator	33-10-34	Weinschel co	BB9784
<input checked="" type="checkbox"/>	Antenna	3142	EMCO	9710-1220
<input checked="" type="checkbox"/>	Antenna	3115	EMCO	9511-4612
<input checked="" type="checkbox"/>	Antenna	3160-08	EMCO	1168
<input checked="" type="checkbox"/>	Antenna	3160-09	EMCO	1304
<input checked="" type="checkbox"/>	Amplifier	HP8447F	HP	3113A06911

<input checked="" type="checkbox"/>	Amplifier	HP83006	HP	3104A00611
<input checked="" type="checkbox"/>	Amplifier	HP8449B	HP	3008A00859
<input checked="" type="checkbox"/>	EMI test receiver	ESCS30	R&S	839809/003
<input checked="" type="checkbox"/>	Artificial mains network	ESH2-Z5	R&S	829991/009
<input checked="" type="checkbox"/>	Artificial hand	FCC-AH-1	Fischer custom communications Inc.	2008

9. Notes

N/A