



hovercam ORBIT RECAST™ Quick Start Guide

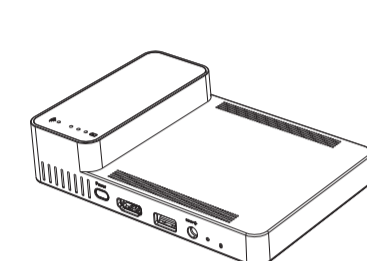

Pathway
PATHWAY INNOVATIONS, INC.


© Copyright 2024 Orbit Recast. All rights reserved. Orbit Recast is a trademark of Pathway Innovations, Inc. Pathway Innovation shall not be liable for technical or editorial errors or omissions contained herein.

What's in the box:

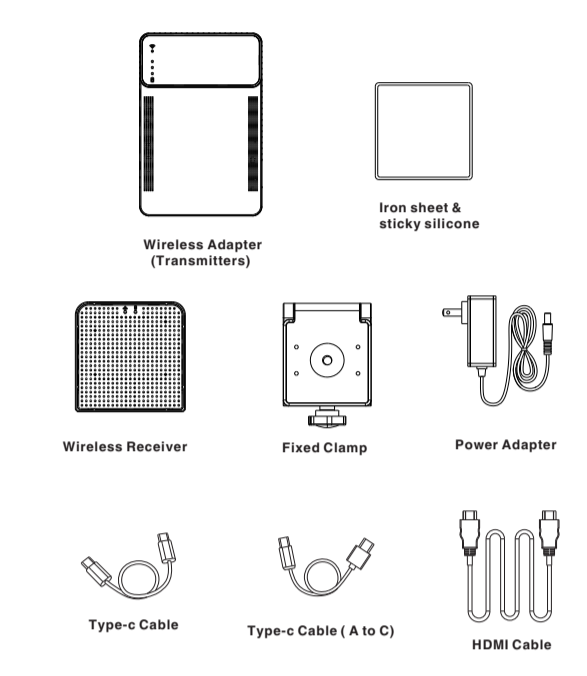


Orbit Recast is a wireless Document camera Adapter.

It is a wired and wireless intelligent wireless transceiver, HDMI output to the terminal or wireless transmission to the terminal display device via WiFi. It can also ensure that there is no frame loss and no delay in the process of video data transmission.

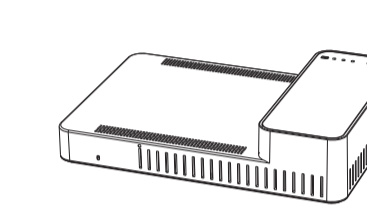

Wireless Adapter (Transmitters)


WiFi 5G wireless transmission. The HDMI OUT resolution supports 4K@30Hz, 1080P@60Hz, 720P@60Hz. Power supply 12V.

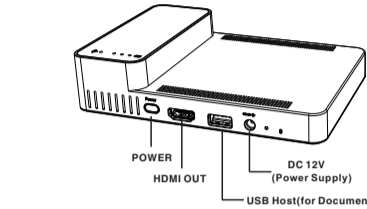

Assembly of base components


Step1: peel off the backing from the bottom of the nano glue, and then stick the nano glue onto one side of the iron plate.

Step2: Peel off the backing from the other side of the nano glue and attach it to the bottom of the Document Camera's base. Then place the Document Camera on the Wireless Adapter, which has built-in magnets around it. Even if you carry the Wireless Adapter around the room, the Document Camera will remain stable and not fall off.

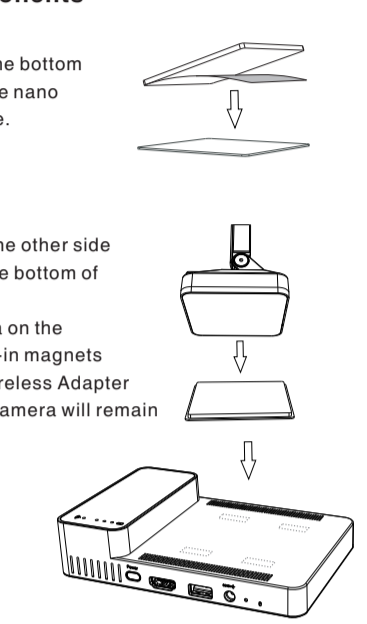


If the base of the Document Camera has magnetic materials such as metal inside, then skip the step of applying nano glue and place it directly on the Wireless Adapter.


Attach the Receiver to the top or side bezel of your display, ensuring the antenna is facing the Transmitter. For the strongest signal, make sure that the Transmitter and Receiver have a clear line of sight and that there are no objects blocking the path between them. With an unobstructed line of sight, the tested maximum range is 100 feet.

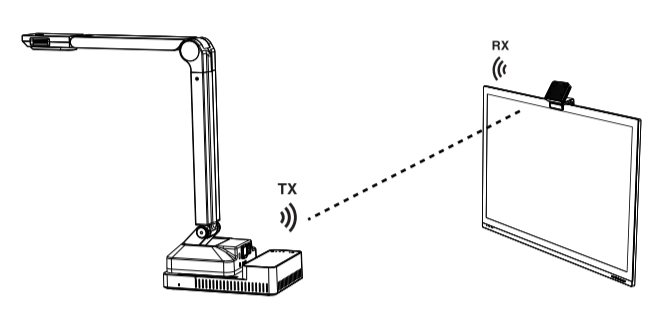

Connect the Document Camera and the Wireless Adapter with a USB cable to directly transfer the local content of the camera to display devices such as large screens. The Document camera UVC resolution supports 4K@30fps MJPG, 1080P@30fps MJPG, 720P@30fps MJPG.

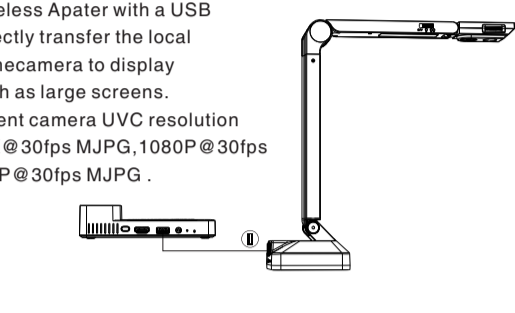

Use the included HDMI cable to connect the HDMI output on the Receiver to an available HDMI input on the display.

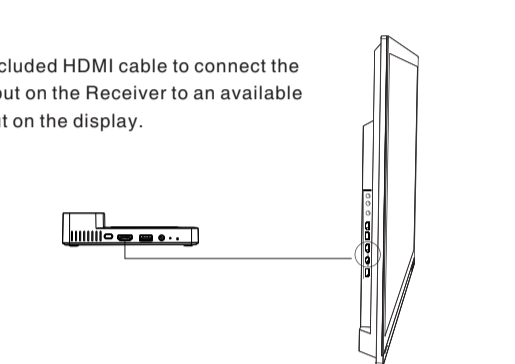

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example: use only shielded interface cables when connecting to computer or peripheral devices).

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:

The equipment complies with FCC Radiation exposure limits set forth for uncontrolled environments. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

				UNLESS OTHERWISE SPECIFIED ALL UNITS ARE IN MILLIMETER TOLERANCES (mm):		MODEL NO.		KR 1518		TITLE:		说明书	
						SCALE		1:1		DESIGN		Doris	
						MATERIAL				CHECK		DATE	
						FINISH		see the note		APPROVE		DATE	
VO.0 图纸发布						QUANTITY		1 pcs		PART NO.		UNIT	
Rev		Revision note		MARK		SHEET		1 OF 1		DRAWING No.		SIZE	
												mm	
												科润视讯 Kerun Visual	

