

## FCC 47 CFR PART 15 SUBPART C

### CERTIFICATION TEST REPORT

*For*

**Beat Booster**

**MODEL No.: Beat Booster**

**FCC ID: 2AAAH-BB001**

**Trademark: Quirky**

**REPORT NO.: ES141029367E1**

**ISSUE DATE: November 17, 2014**

**Prepared for**

**Quirky, Inc.**

**606 W 28th St Floor 7 New York, NY 10001 United States**

*Prepared by*

**SHENZHEN EMTEK CO., LTD.**

**Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,  
Guangdong, China**

**TEL: 86-755-26954280**

**FAX: 86-755-26954282**

## Table of Contents

<b>1</b>	<b>TEST RESULT CERTIFICATION</b>	<b>3</b>
<b>2</b>	<b>EUT TECHNICAL DESCRIPTION</b>	<b>4</b>
<b>3</b>	<b>SUMMARY OF TEST RESULT</b>	<b>5</b>
<b>4</b>	<b>TEST METHODOLOGY</b>	<b>6</b>
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
4.2	MEASUREMENT EQUIPMENT USED	6
4.3	DESCRIPTION OF TEST MODES	6
<b>5</b>	<b>FACILITIES AND ACCREDITATIONS</b>	<b>8</b>
5.1	FACILITIES	8
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	8
<b>6</b>	<b>TEST SYSTEM UNCERTAINTY</b>	<b>9</b>
<b>7</b>	<b>SETUP OF EQUIPMENT UNDER TEST</b>	<b>10</b>
7.1	RADIO FREQUENCY TEST SETUP 1	10
7.2	RADIO FREQUENCY TEST SETUP 2	10
7.3	CONDUCTED EMISSION TEST SETUP	11
7.4	SUPPORT EQUIPMENT	11
<b>8</b>	<b>TEST REQUIREMENTS</b>	<b>12</b>
8.1	20DB BANDWIDTH	12
8.2	CARRIER FREQUENCY SEPARATION	18
8.3	NUMBER OF HOPPING FREQUENCIES	24
8.4	AVERAGE TIME OF OCCUPANCY (DWELL TIME)	26
8.5	MAXIMUM PEAK CONDUCTED OUTPUT POWER	29
8.6	CONDUCTED SPURIOUS EMISSION	35
8.7	RADIATED SPURIOUS EMISSION	40
8.8	CONDUCTED EMISSION TEST	51
8.9	ANTENNA APPLICATION	54

## 1 TEST RESULT CERTIFICATION

Applicant:	Quirky, Inc. 606 W 28th St Floor 7 New York, NY 10001 United States
Manufacturer:	Quirky, Inc. 606 W 28th St Floor 7 New York, NY 10001 United States
Product Description:	Beat Booster
Model Number:	Beat Booster
File Number:	ES141029367E1
Date of Test:	November 03, 2014 to November 17, 2014


Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J	
FCC 47 CFR Part 15, Subpart C	PASS

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247

The test results of this report relate only to the tested sample identified in this report

Date of Test : November 03, 2014 to November 17, 2014



Yaping Shen/Editor

Prepared by : Yaping Shen

Yaping Shen/Editor

Reviewer : Joe Xia

Joe Xia/Supervisor



Approve & Authorized Signer : Lisa Wang

Lisa Wang/Manager

## 2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
<b>Device Type:</b>	Bluetooth Device
<b>Data Rate</b>	1Mbps for GFSK modulation 2Mbps for $\pi/4$ -DQPSK modulation 3Mbps for 8DPSK modulation
<b>Modulation:</b>	GFSK, $\pi/4$ -DQPSK, 8DPSK for Bluetooth DSS; GFSK for Bluetooth DTS;
<b>Operating Frequency Range(s):</b>	2402-2480MHz
<b>Number of Channels:</b>	79 Channels for Bluetooth DSS; 40 Channels for Bluetooth DTS;
<b>Transmit Power Max:</b>	DSS: 6.124dBm DTS: 2.737 dBm
<b>Antenna Type :</b>	Integral Antenna
<b>Antenna Gain:</b>	-1.72 dBi;
<b>Power supply:</b>	<input type="checkbox"/> DC supply: 3.7V internal rechargeable lithium battery or DC 5V from AC adapter <input checked="" type="checkbox"/> Adapter supply: Model: AS360-120-AD250 Input: AC 100-240V, 50/60Hz 1.2A Output: DC 12V 2.5A
<b>Temperature Range</b>	-20°C ~ +55°C

**Note:** for more details, please refer to the User's manual of the EUT.

### 3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(1)	20 dB Bandwidth	PASS	
15.247(a)(1)	Carrier Frequency Separation	PASS	
15.247(a)(1)	Number of Hopping Frequencies	PASS	
15.247(a)(1)	Average Time of Occupancy (Dwell Time)	PASS	
15.247(b)(1)	Maximum Peak Conducted Output Power	PASS	
15.247(c)	Conducted Spurious Emissions	PASS	
15.247(d) 15.209	Radiated Spurious Emissions	PASS	
15.207	Conducted Emission	PASS	
15.247(b)	Antenna Application	PASS	
NOTE1: N/A (Not Applicable)			

#### RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AAAH-BB001 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 4 TEST METHODOLOGY

### 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:  
FCC 47 CFR Part 2, Subpart J  
FCC 47 CFR Part 15, Subpart C  
DA 00-705

### 4.2 MEASUREMENT EQUIPMENT USED

#### 4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/17/2014
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/17/2014
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/17/2014
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/17/2014
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/17/2014

#### 4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/17/2014
Pre-Amplifier	HP	8447D	2944A07999	05/17/2014
Bilog Antenna	Schwarzbeck	VULB9163	142	05/17/2014
Loop Antenna	ARA	PLA-1030/B	1029	05/17/2014
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/17/2014
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/17/2014
Cable	Schwarzbeck	AK9513	ACRX1	05/17/2014
Cable	Rosenberger	N/A	FP2RX2	05/17/2014
Cable	Schwarzbeck	AK9513	CRPX1	05/17/2014
Cable	Schwarzbeck	AK9513	CRRX2	05/17/2014

#### 4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014
Power meter	Anritsu	ML2495A	0824006	05/17/2014
Power sensor	Anritsu	MA2411B	0738172	05/17/2014

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### 4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for Bluetooth v2.1 BR GFSK modulation; 2Mbps for Bluetooth v2.1 EDR π/4-DQPSK modulation; 3Mbps for Bluetooth v2.1 EDR 8DPSK modulation ) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for Bluetooth v2.1:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	...	...
1	2403	40	2442	76	2478
2	2404	41	2443	77	2479
...	...	...	...	78	2480

Note:  $fc = 2402\text{MHz} + k \times 1\text{MHz}$  k=1 to 78

Test Frequency and channel for Bluetooth v2.1:

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	78	2480

## 5 FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 LABORATORY ACCREDITATIONS AND LISTINGS

#### Site Description

EMC Lab. : Accredited by CNAS, 2013.10.28  
The certificate is valid until 2016.10.29  
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)  
The Certificate Registration Number is L229

: Accredited by TUV Rheinland Shenzhen, 2010.5.25  
The Laboratory has been assessed according to the requirements ISO/IEC 17025.

: Accredited by FCC, October 28, 2010  
The Certificate Registration Number is 406365.

: Accredited by FCC, February 28, 2013  
The Certificate Registration Number is 709623.

: Accredited by Industry Canada, May 24, 2008  
The Certificate Registration Number is 46405-4480

## 6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0 \text{dB}$
Conducted Emissions Test	$\pm 2.0 \text{dB}$
Radiated Emission Test	$\pm 2.0 \text{dB}$
Occupied Bandwidth Test	$\pm 1.0 \text{dB}$
Band Edge Test	$\pm 3 \text{dB}$
All emission, radiated	$\pm 3 \text{dB}$
Antenna Port Emission	$\pm 3 \text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

## 7 SETUP OF EQUIPMENT UNDER TEST

### 7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth v2.1 component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.




### 7.2 RADIO FREQUENCY TEST SETUP 2


The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

(a) Radiated Emission Test Set-Up, Frequency Below 1000MHz

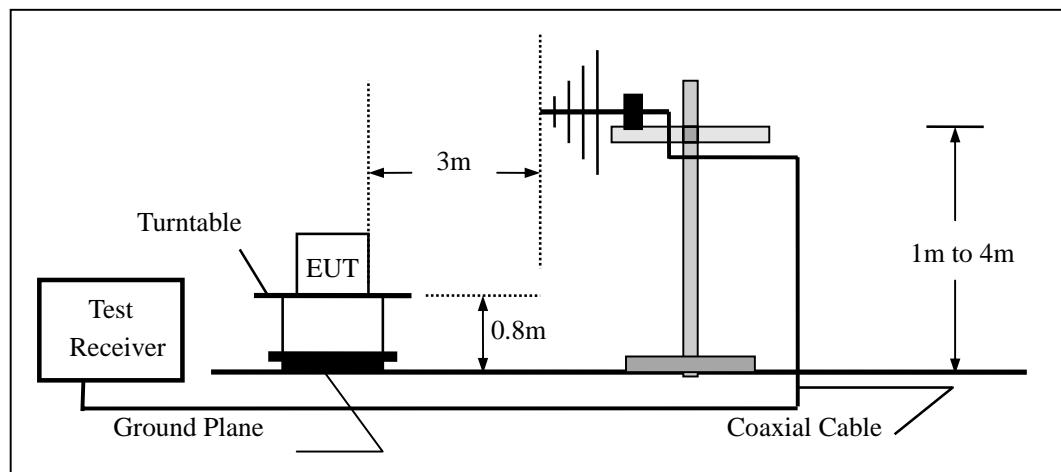

(b) Radiated Emission Test Set-Up, Frequency above 1000MHz

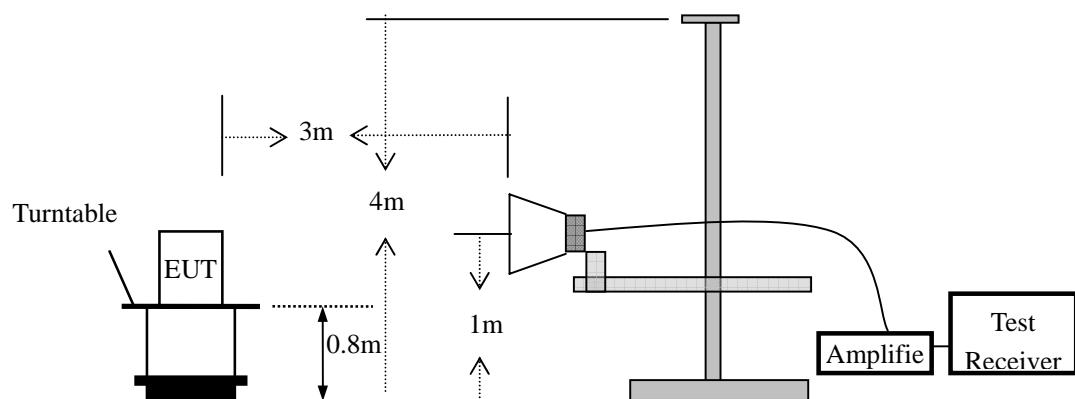


### 7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

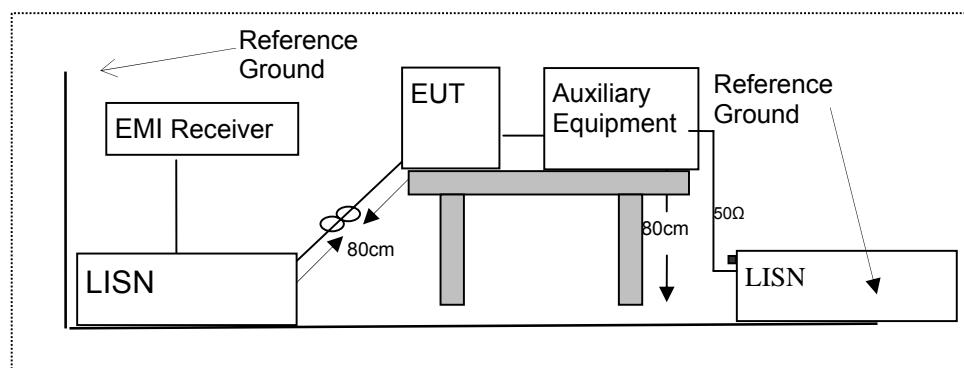

### 7.4 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	iPhone	Apple	A1387	N/A	N/A

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 8 TEST REQUIREMENTS

### 8.1 20DB BANDWIDTH

#### 8.1.1 Applicable Standard

According to FCC Part 15.247(a)(1) and DA 00-705

#### 8.1.2 Conformance Limit

No limit requirement.

#### 8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

#### 8.1.4 Test Procedure

The EUT was operating in Bluetooth v2.1 mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 30 kHz.

Set the video bandwidth (VBW) =100 kHz.

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.



If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.



Measure and record the results in the test report.



### Test Results



Temperature : 28°C      Test Date : November 12, 2014  
Humidity : 55 %      Test By: KK


Modulation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (kHz)	Limit (kHz)	Verdict
GFSK	0	2402	838.228	N/A	PASS
	39	2441	882.830	N/A	PASS
	78	2480	880.776	N/A	PASS
$\pi/4$ -DQPSK	0	2402	1200.0	N/A	PASS
	39	2441	1207.0	N/A	PASS
	78	2480	1205.0	N/A	PASS
8DPSK	0	2402	1259.0	N/A	PASS
	39	2441	1457.0	N/A	PASS
	78	2480	1214.0	N/A	PASS
Note: N/A (Not Applicable)					

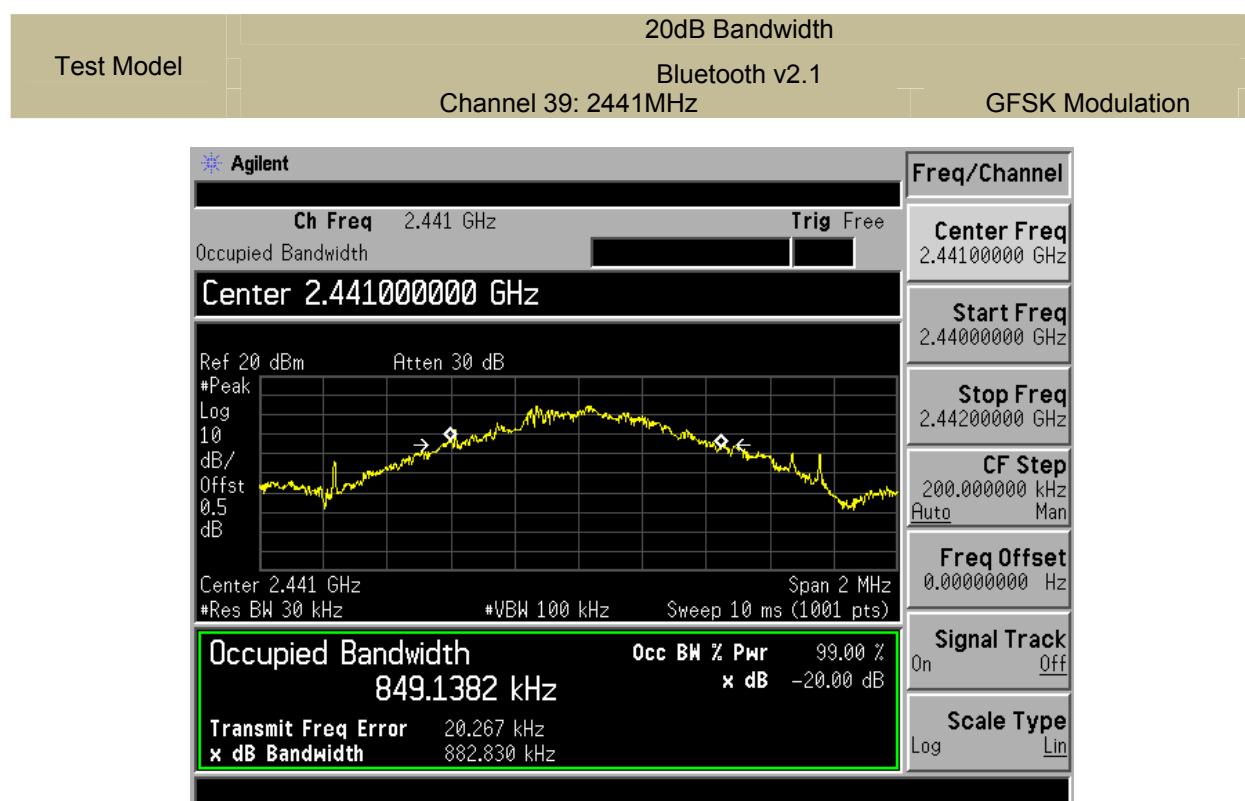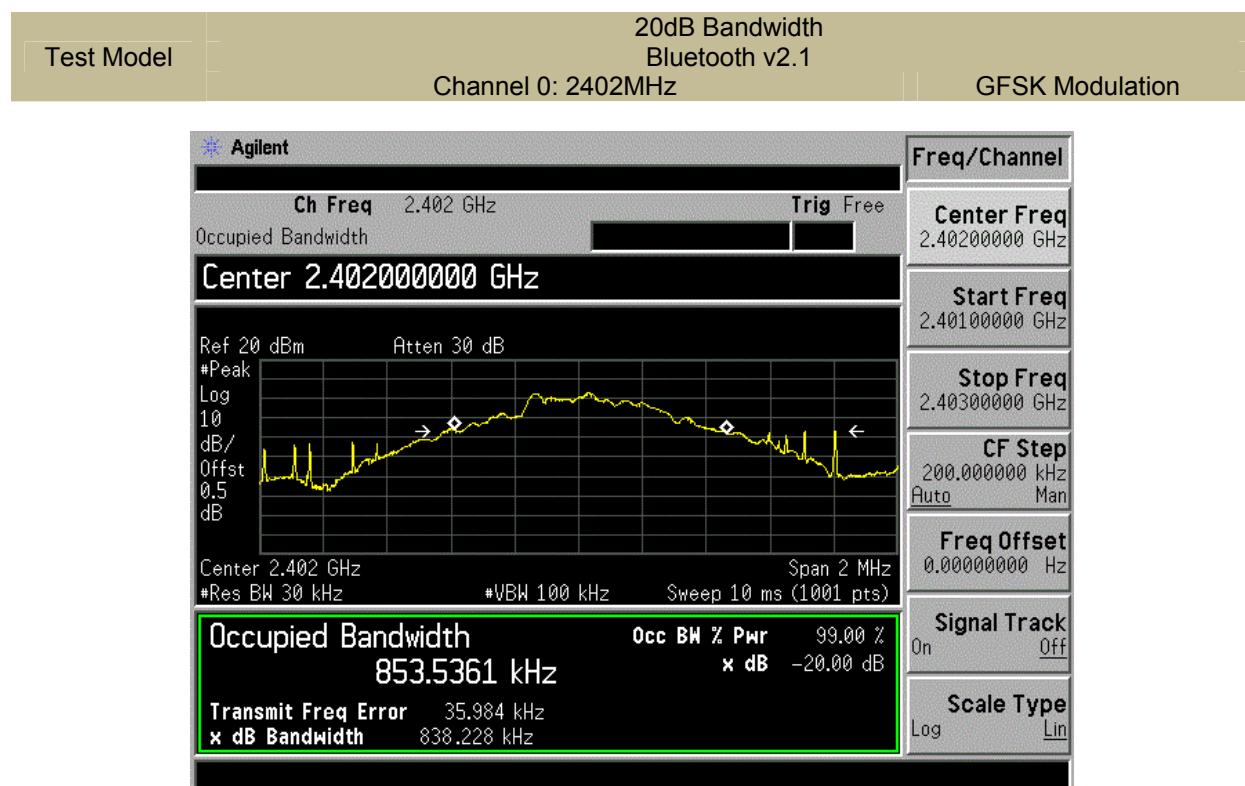

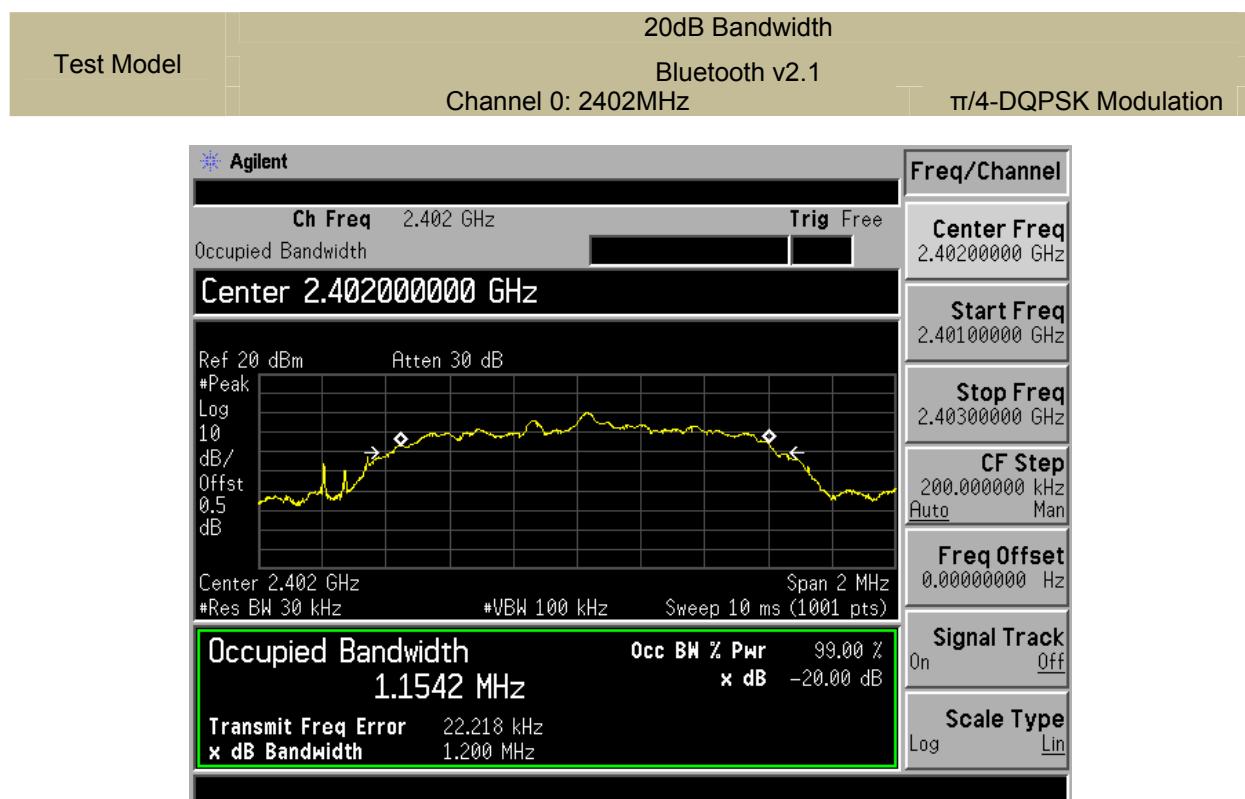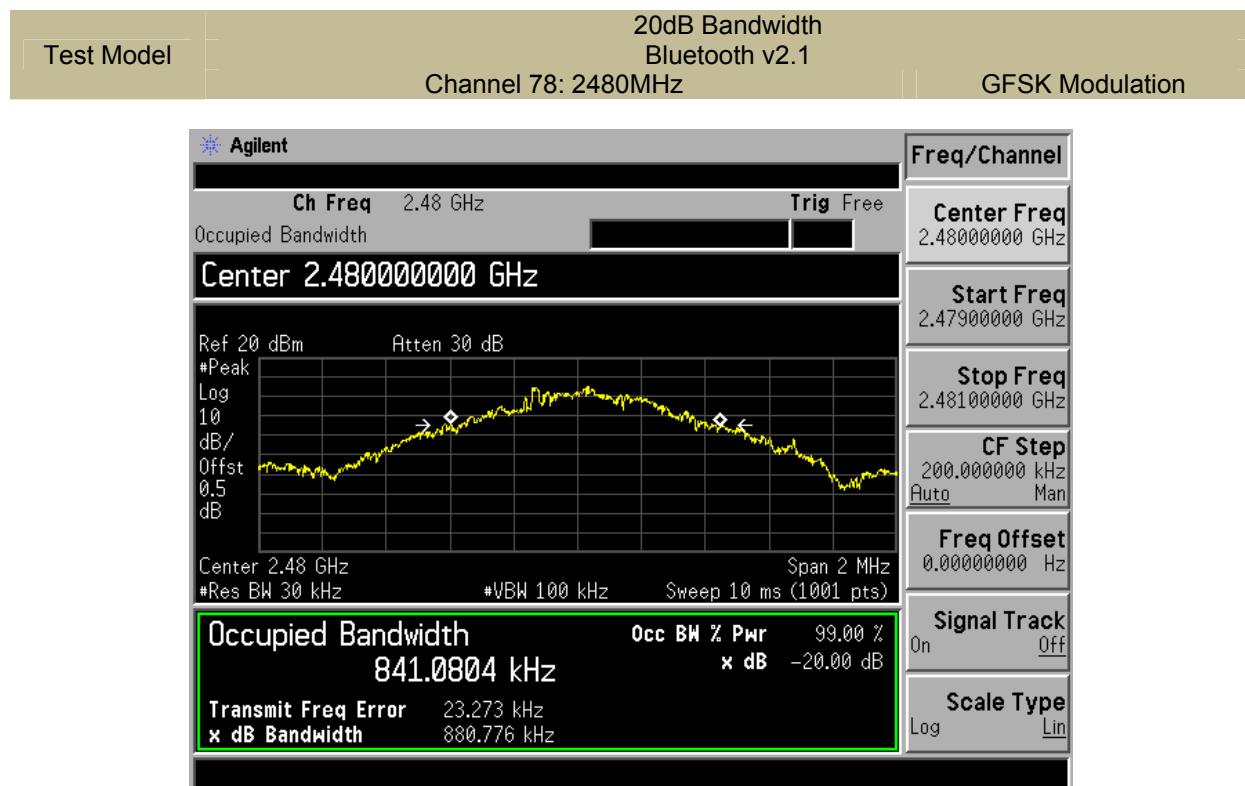

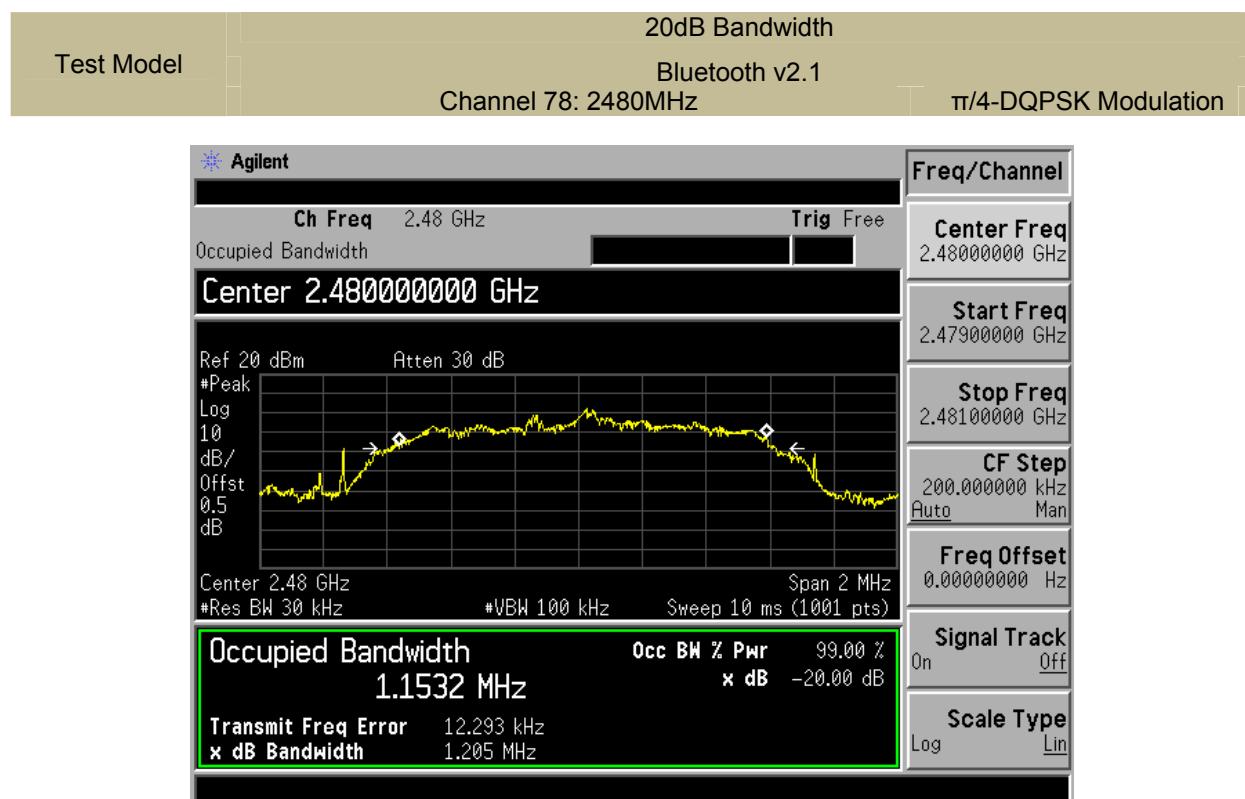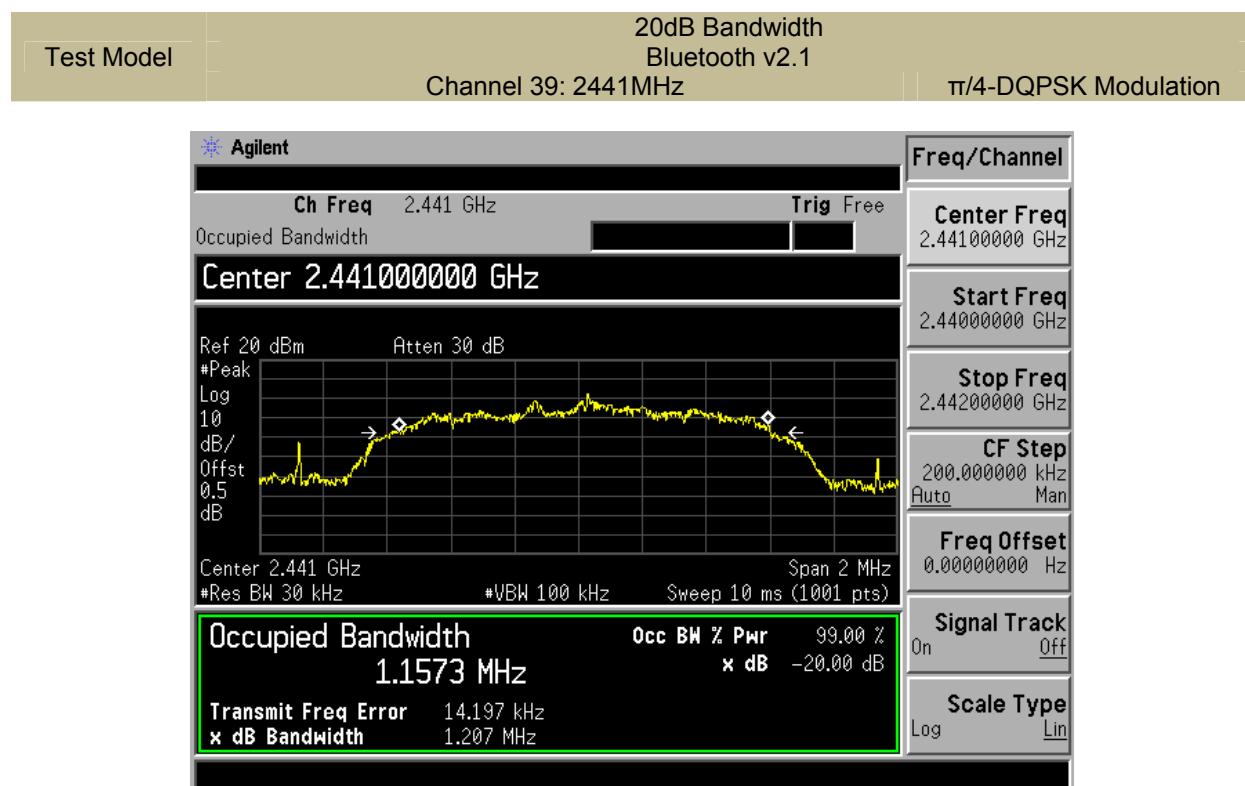

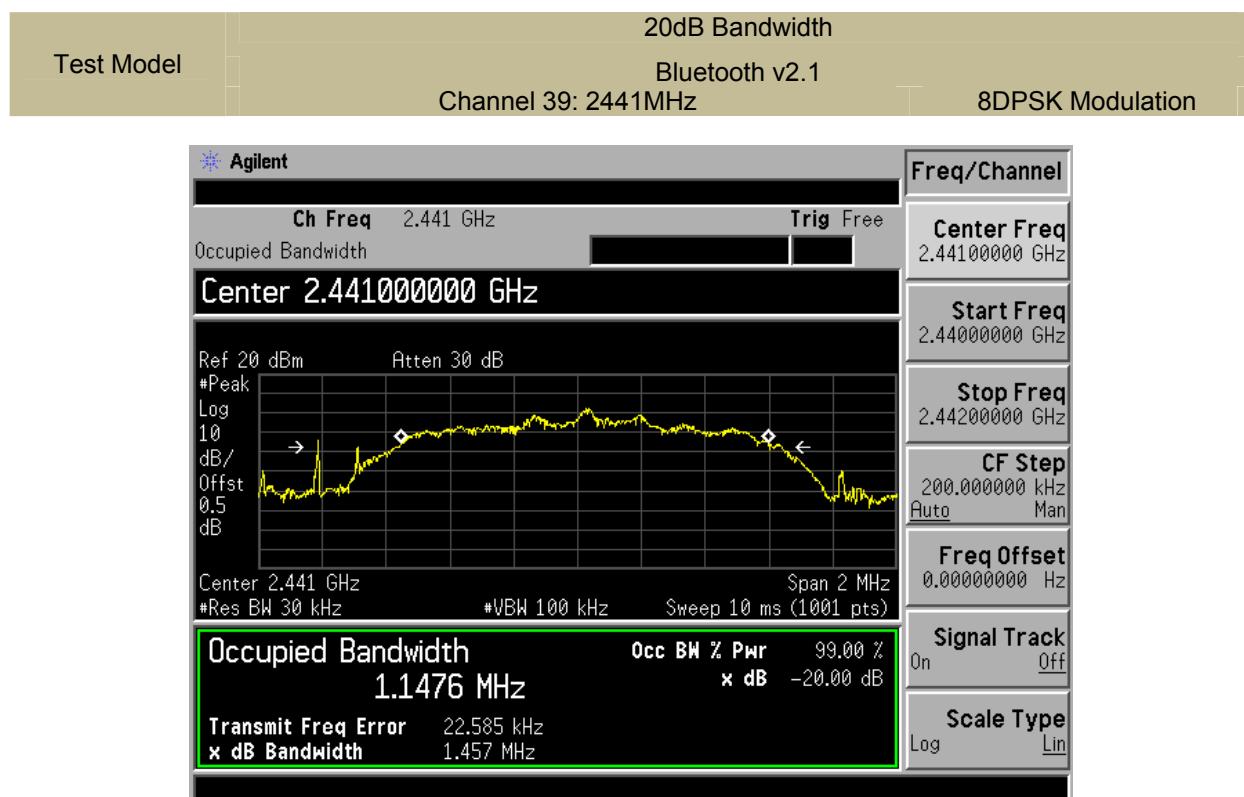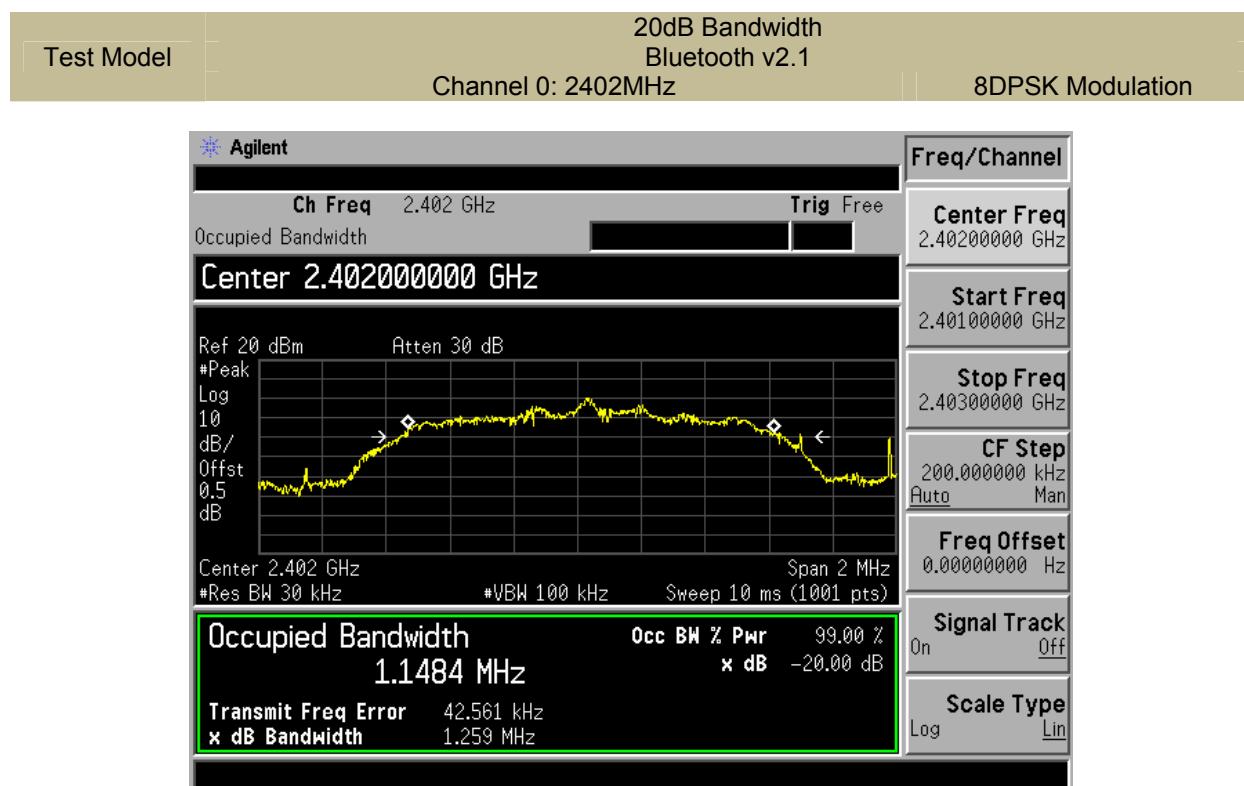

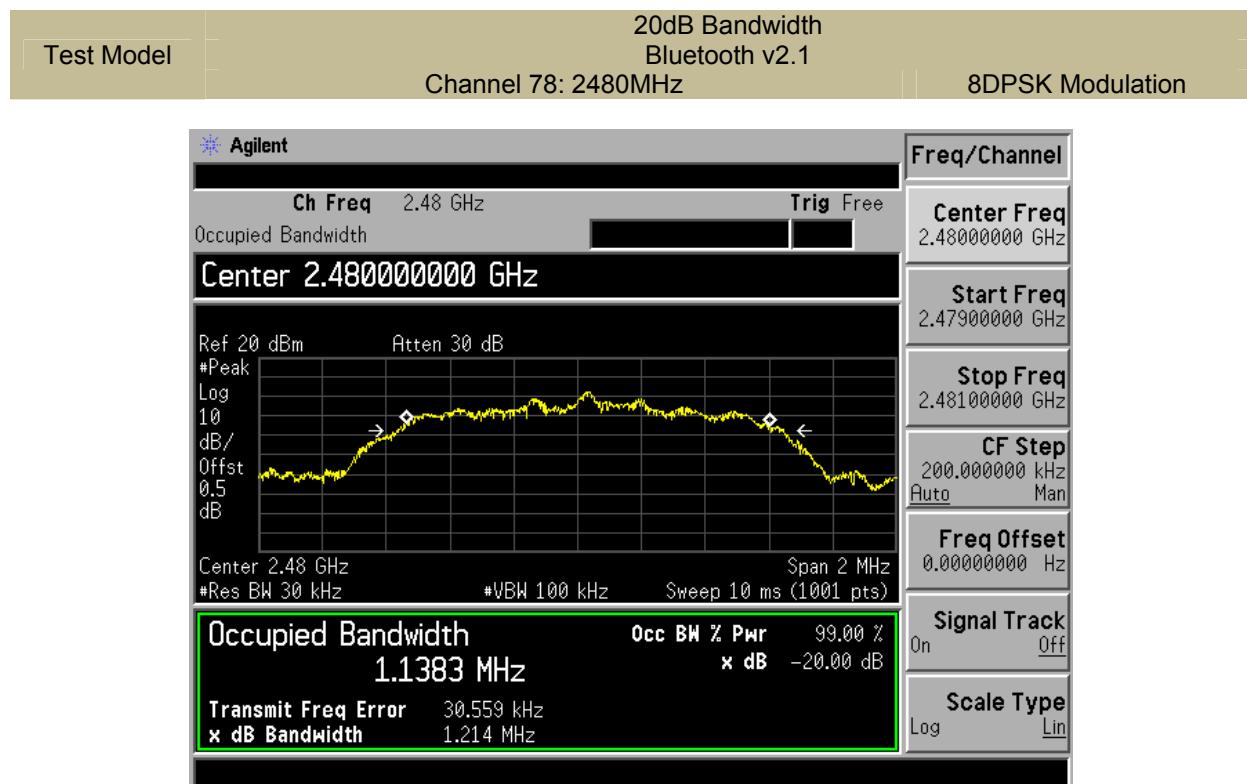

## 8.2 CARRIER FREQUENCY SEPARATION

### 8.2.1 Applicable Standard

According to FCC Part 15.247(a)(1) and DA 00-705

### 8.2.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

### 8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 8.2.4 Test Procedure

- According to FCC Part15.247(a)(1)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Set the RBW =100kHz. Set VBW =300kHz.

Set the span = wide enough to capture the peaks of two adjacent channels

Set Sweep time = auto couple.

Set Detector = peak. Set Trace mode = max hold.



Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.



## Test Results



Temperature :	28°C	Test Date :	November 12, 2014
Humidity :	55 %	Test By:	KK



Modulation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (kHz)	Limit (kHz)	Verdict
GFSK	0	2402	1.031	>838.228	PASS
	39	2441	1.022	>882.830	PASS
	78	2480	1.008	>880.776	PASS
$\pi/4$ -DQPSK	0	2402	1.029	>800.000	PASS
	39	2441	1.014	>804.667	PASS
	78	2480	1.001	>803.333	PASS
8DPSK	0	2402	1.001	>809.333	PASS
	39	2441	1.005	>971.333	PASS
	78	2480	1.002	>839.333	PASS


Note: Limit = 20dB bandwidth for GFSK Modulation , Limit = 20dB bandwidth\*2/3 for  $\pi/4$ -DQPSK &8DPSK Modulation, if it is greater than 25kHz and the output power is less than 125mW (21dBm).

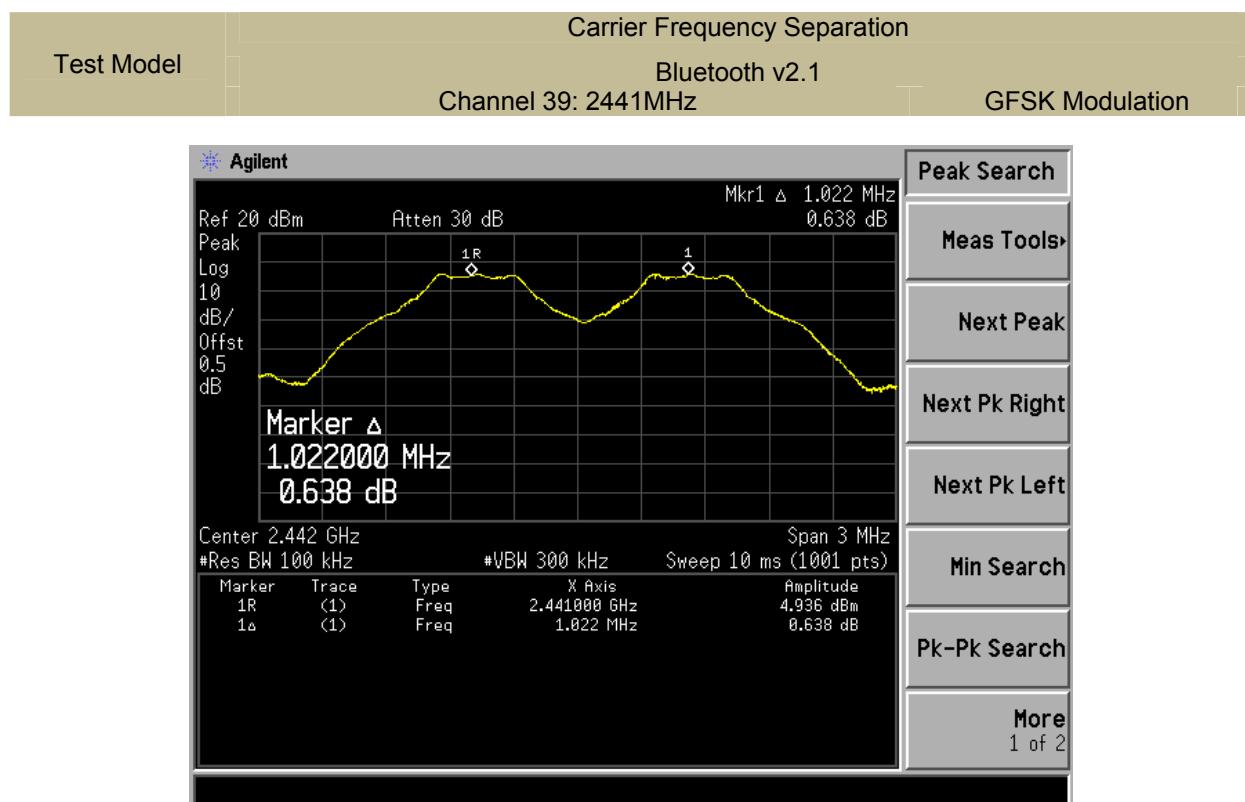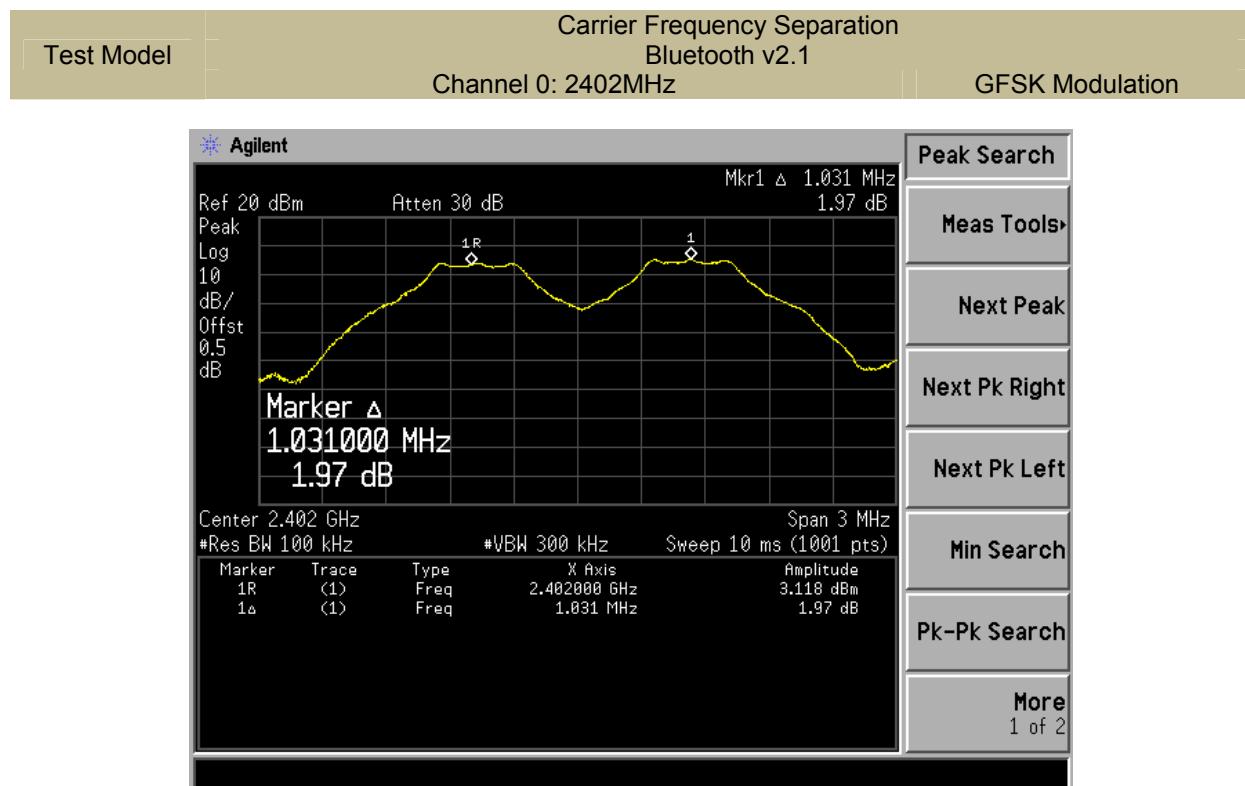

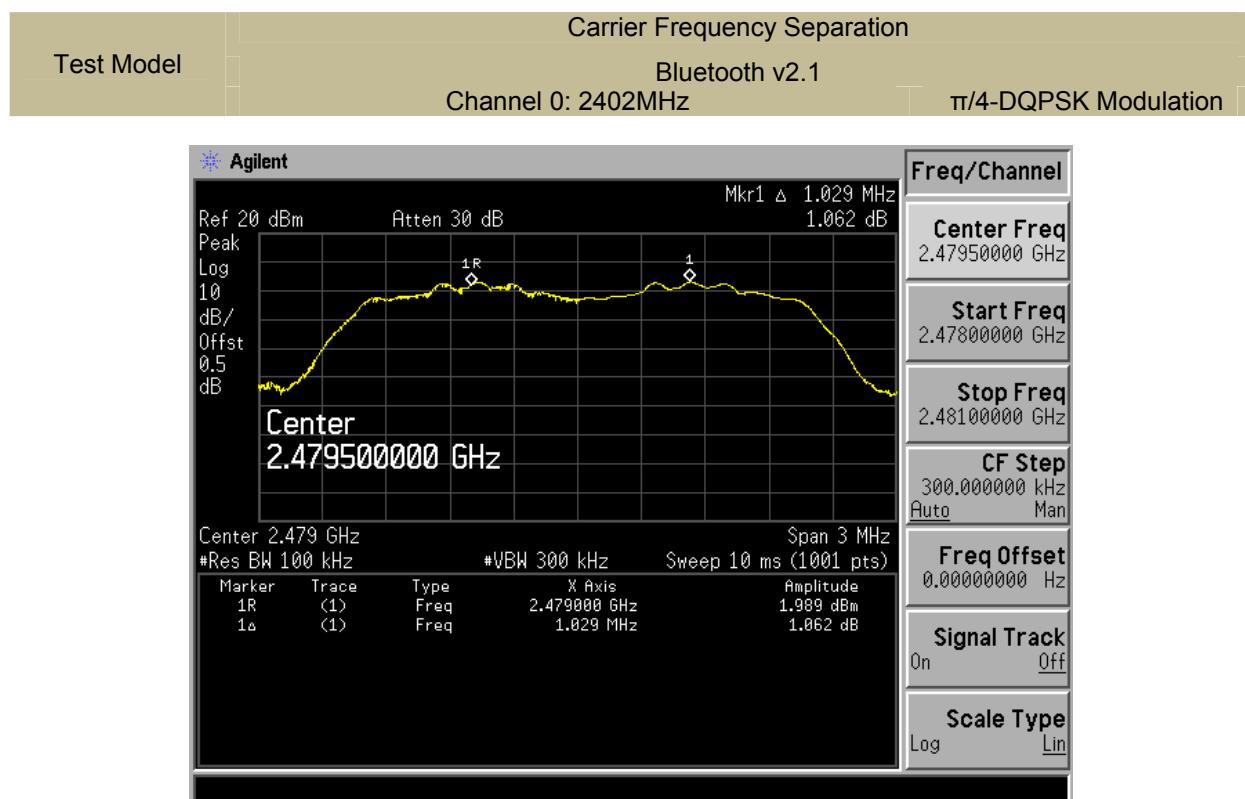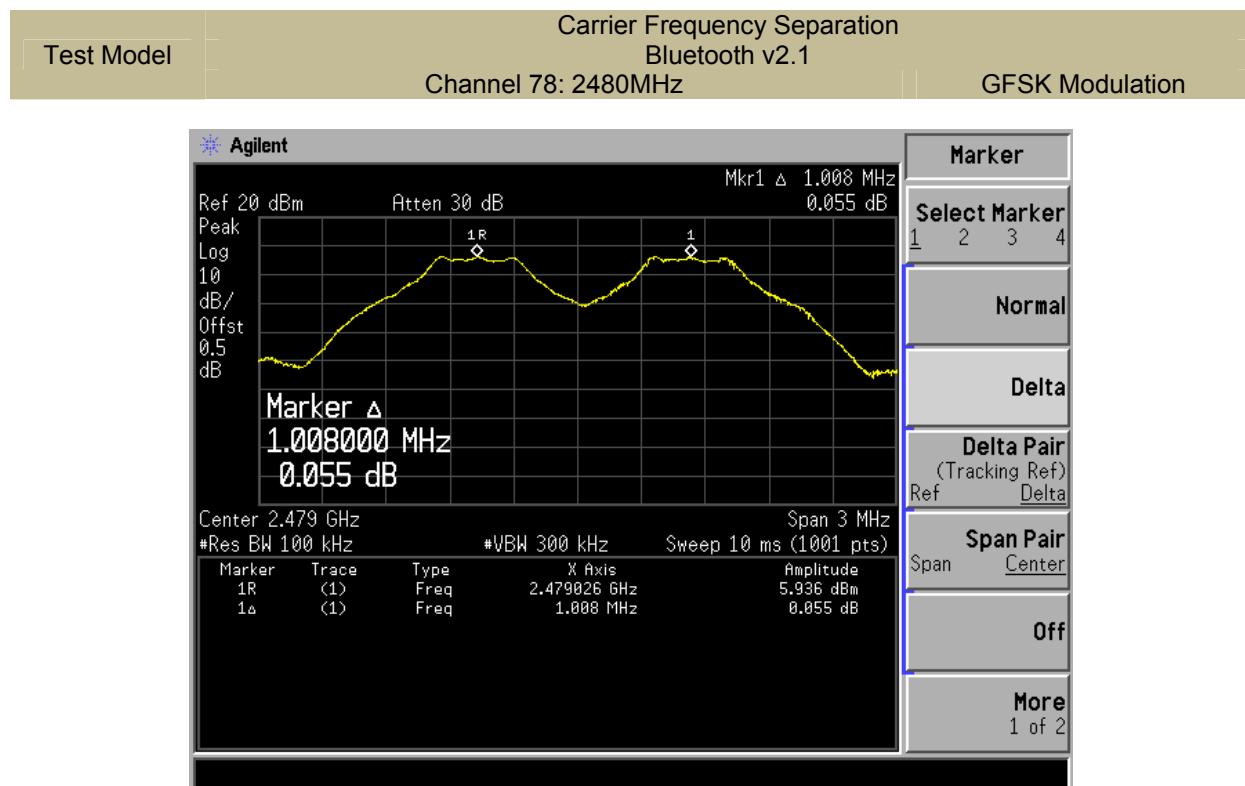

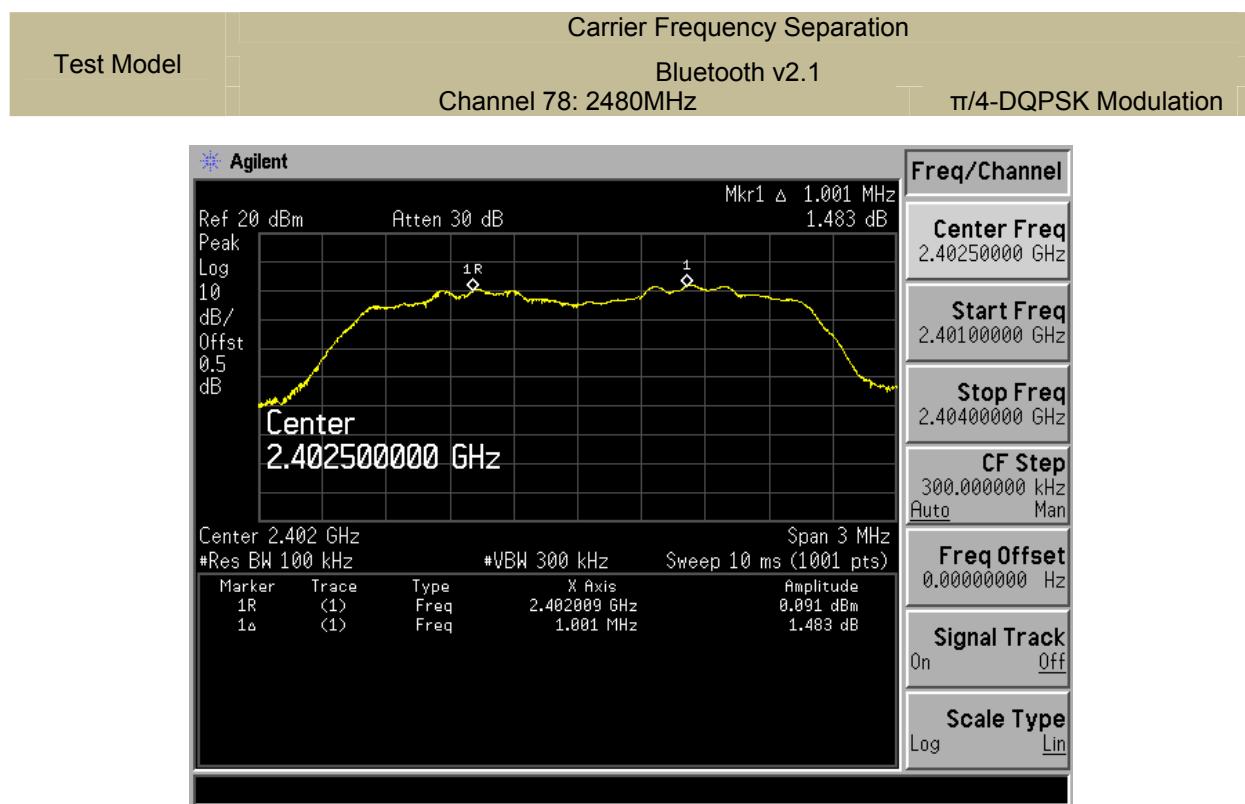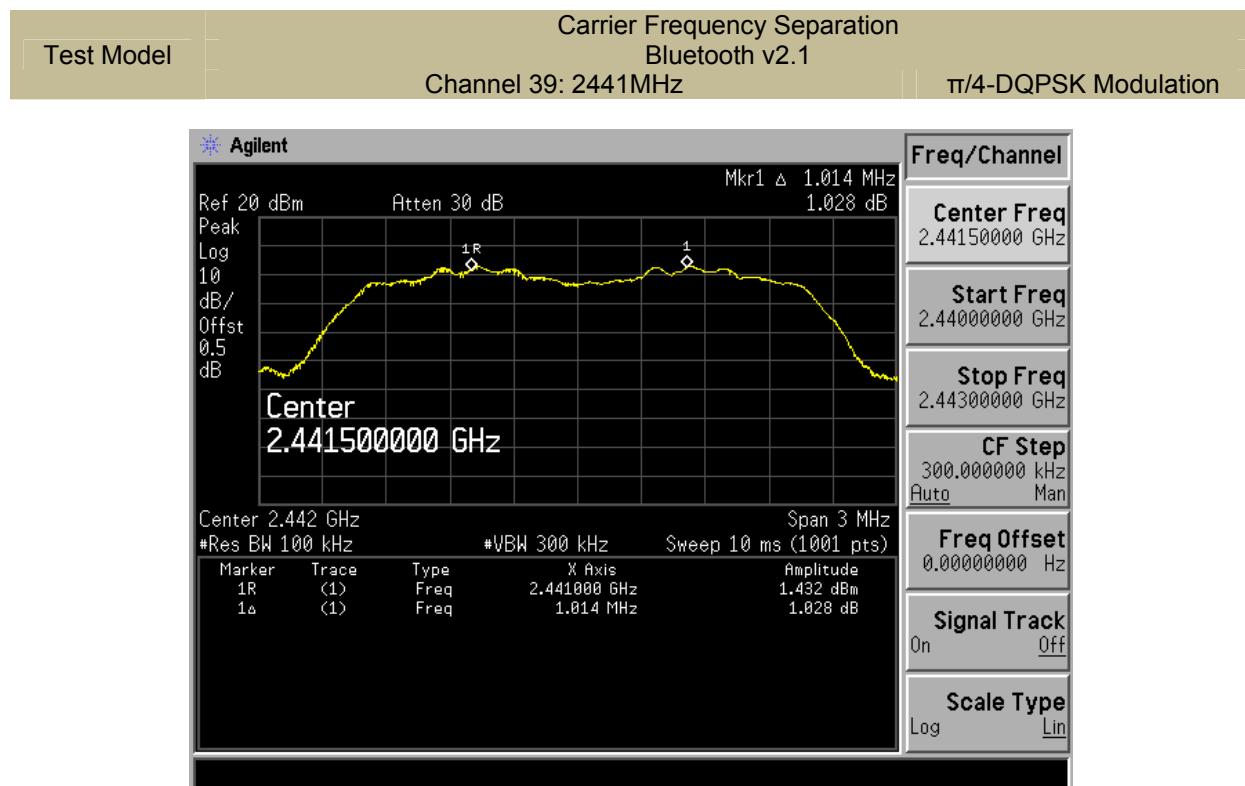

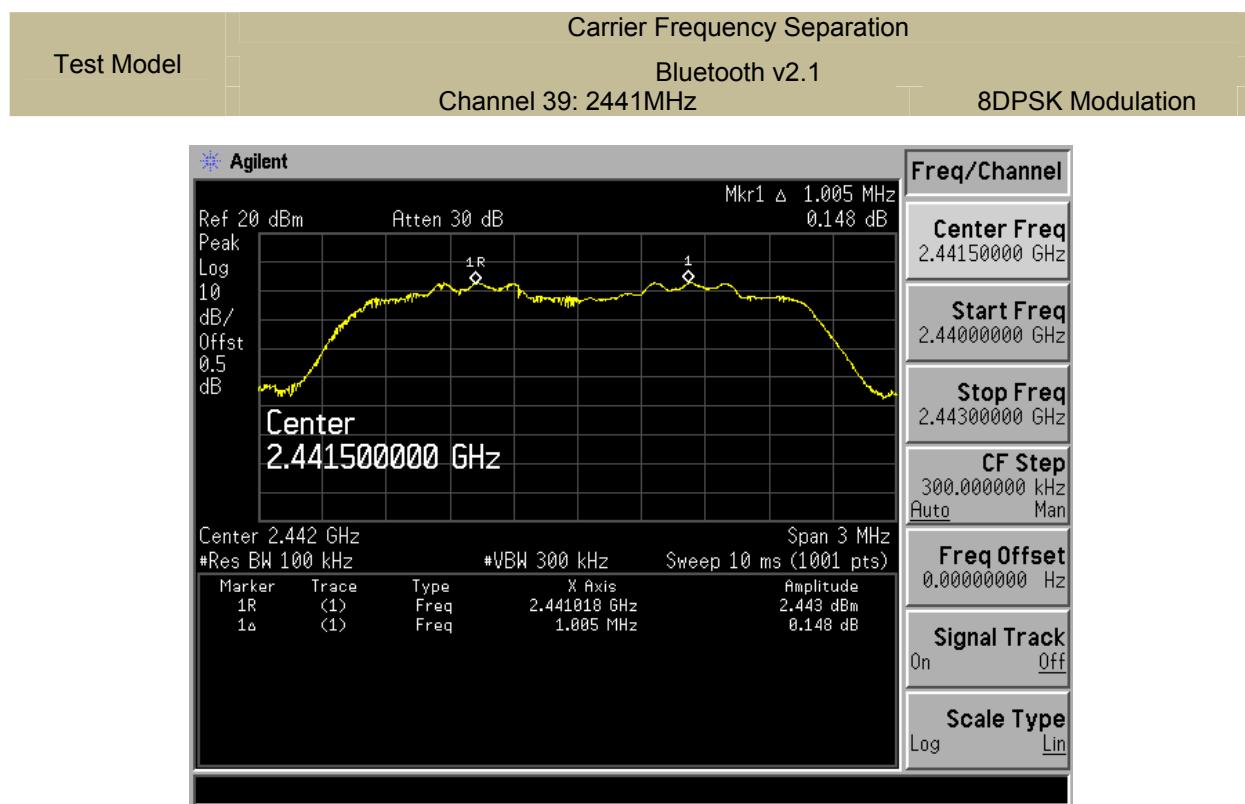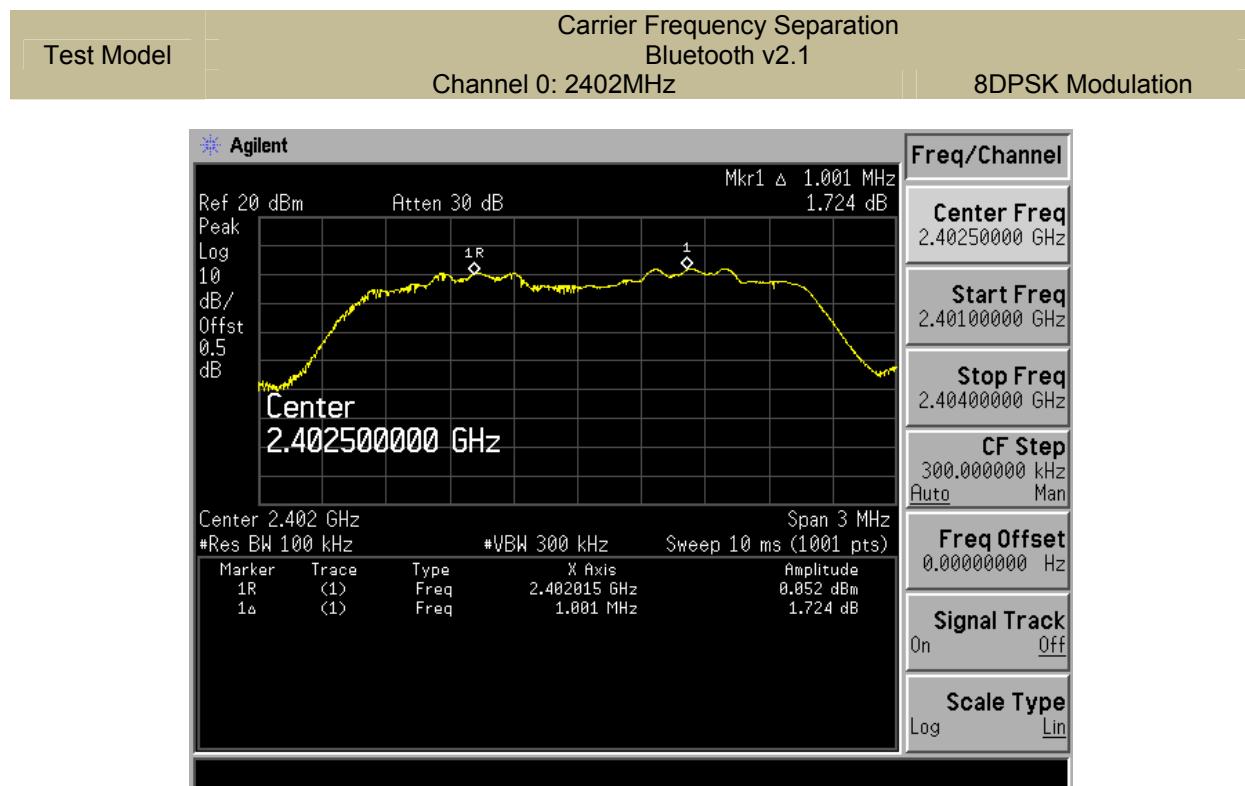

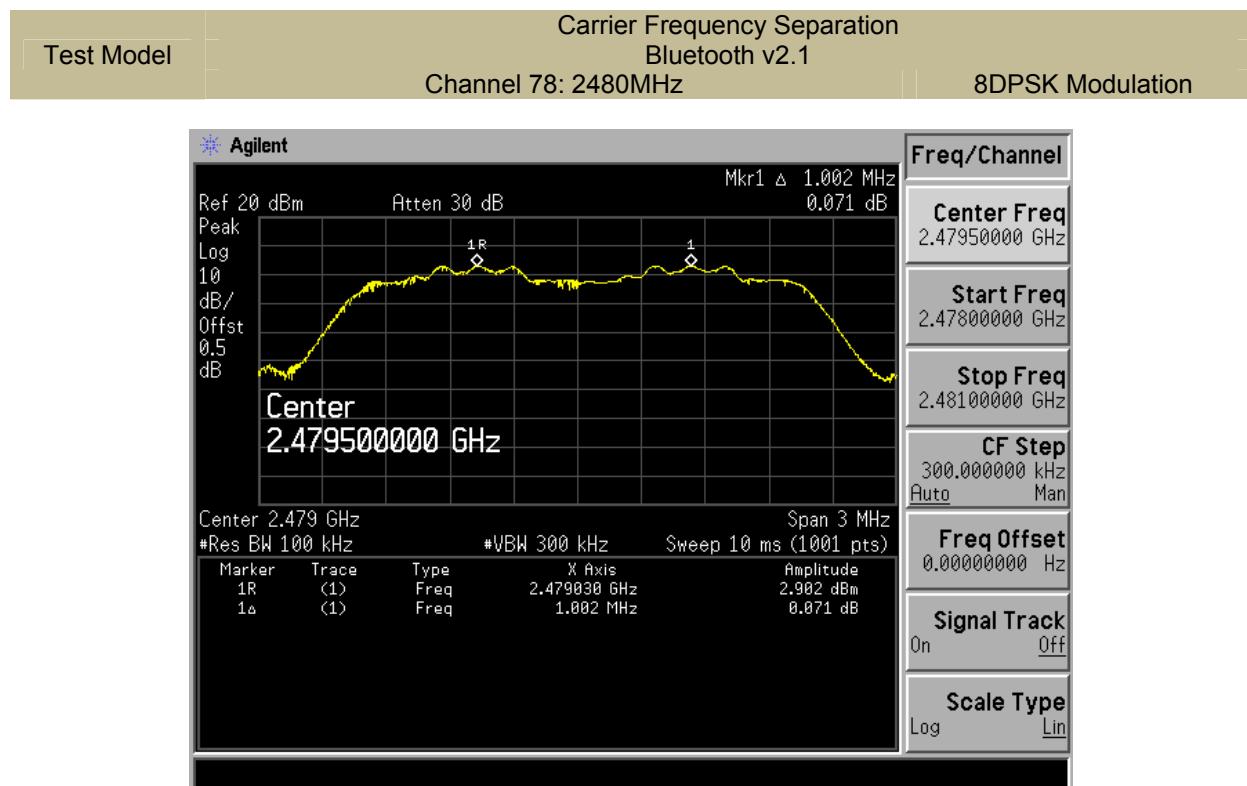

### 8.3 NUMBER OF HOPPING FREQUENCIES

#### 8.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) (iii) and DA 00-705

#### 8.3.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall use at least 15 channels.

#### 8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

#### 8.3.4 Test Procedure

■ According to FCC Part 15.247(a)(1)(iii)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation (2390-2440MHz) and (2340-2490MHz)

RBW  $\geq$  1% of the span = 500kHz

VBW  $\geq$  RBW

Sweep = auto



Detector function = peak

Trace = max hold

Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

#### Test Results

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel limit
2402-2480	79	$\geq 15$

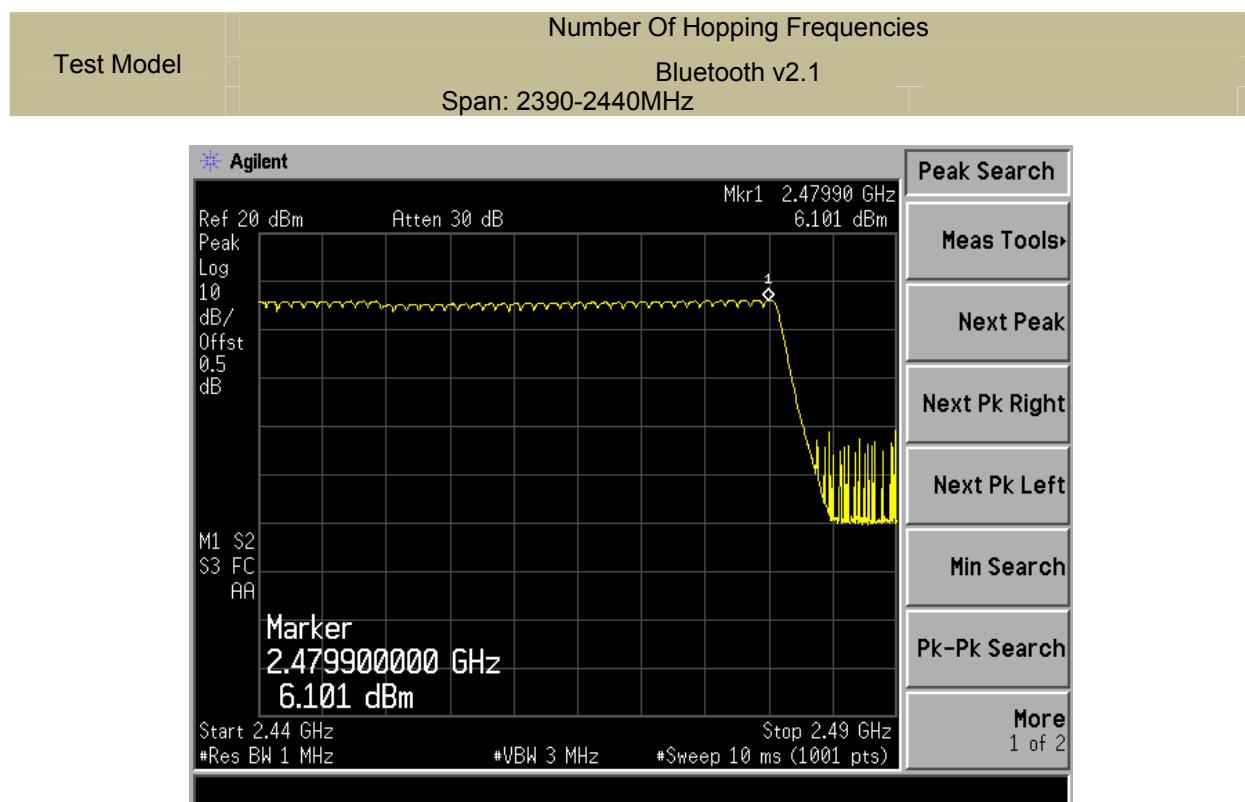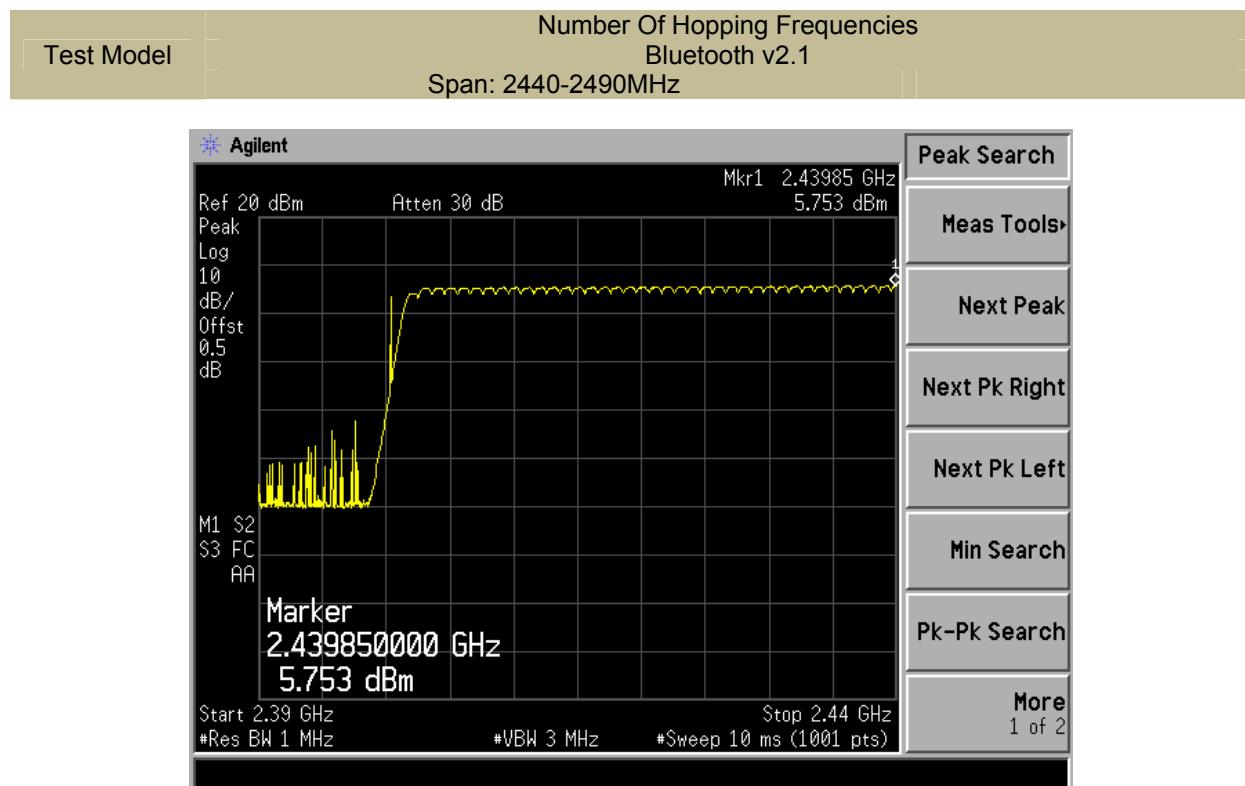

## 8.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

### 8.4.1 Applicable Standard

According to FCC Part 15.247(a)(1)(iii) and DA 00-705

### 8.4.2 Conformance Limit

For frequency hopping systems operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4s within a period of 0.4s multiplied by the number of hopping channels employed.

### 8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 8.4.4 Test Procedure

#### ■ According to FCC Part15.247(a)(1)(iii)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW  $\geq$  RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold



If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section.


### 8.4.5 Test Results

Temperature : 28°C      Test Date : November 12, 2014  
Humidity : 55 %      Test By: KK

Modulation Mode	Channel Number	Packet type	Pluse width (ms)	Number per channel in 31.6s	dwell time (ms)	Limit (ms)	Verdict
GFSK	1	DH1	0.340	1600/(2*79) x 31.6 = 320	108.834	<400	PASS
	1	DH3	1.560	1600/(4*79) x 31.6 =160	249.600	<400	PASS
	1	DH5	2.860	1600/(6*79) x 31.6 =106.67	305.076	<400	PASS

Note:

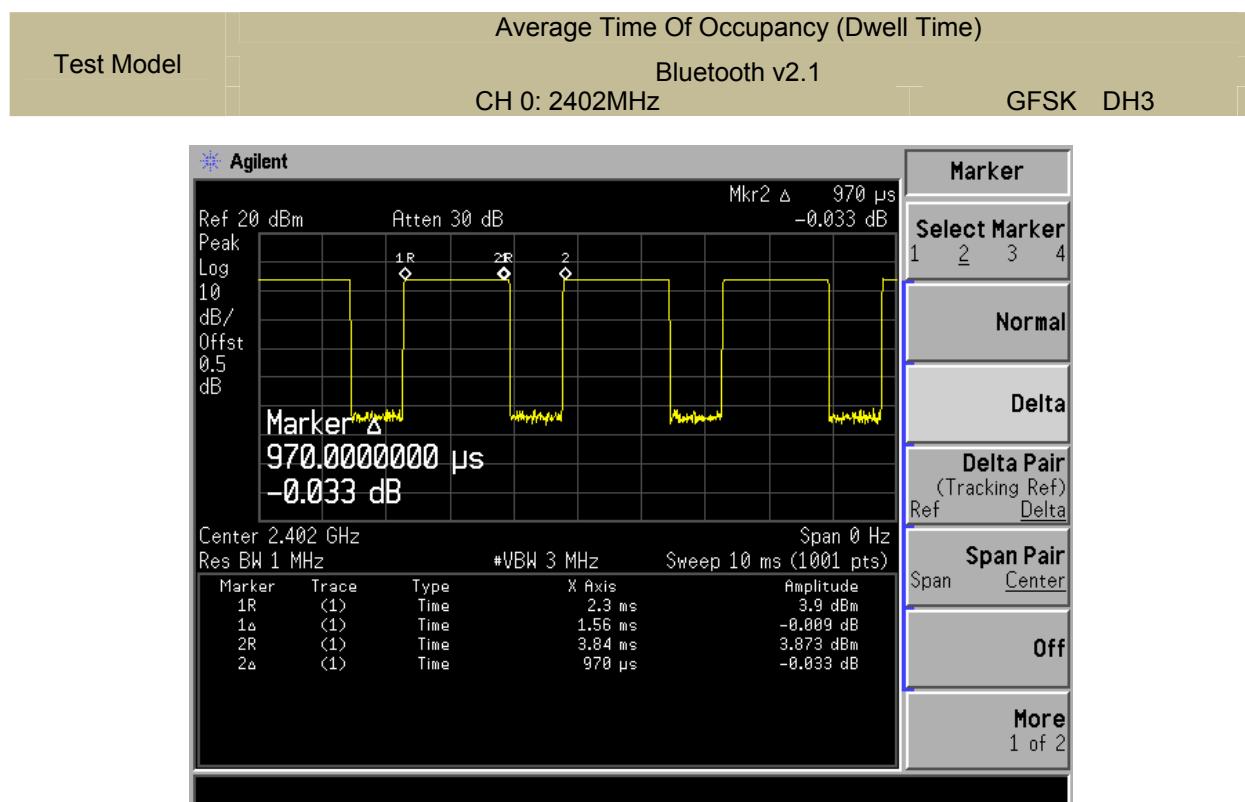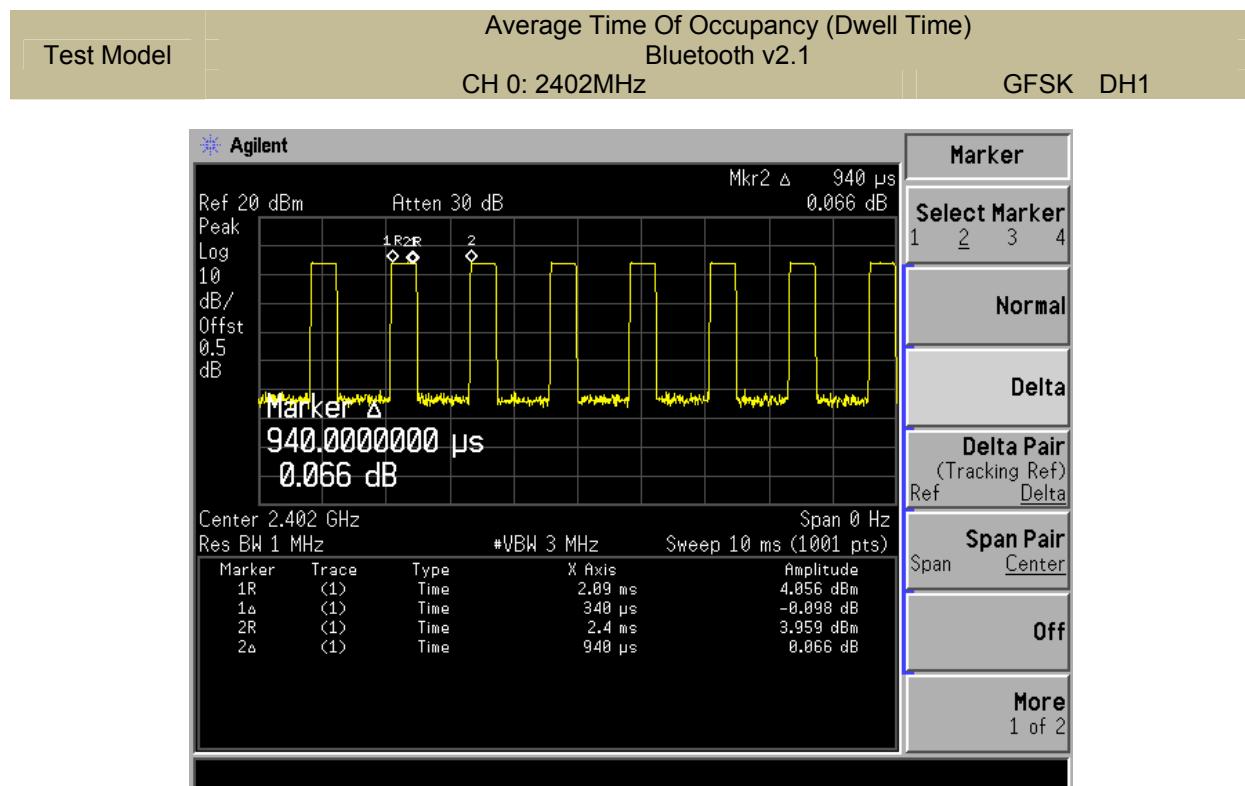

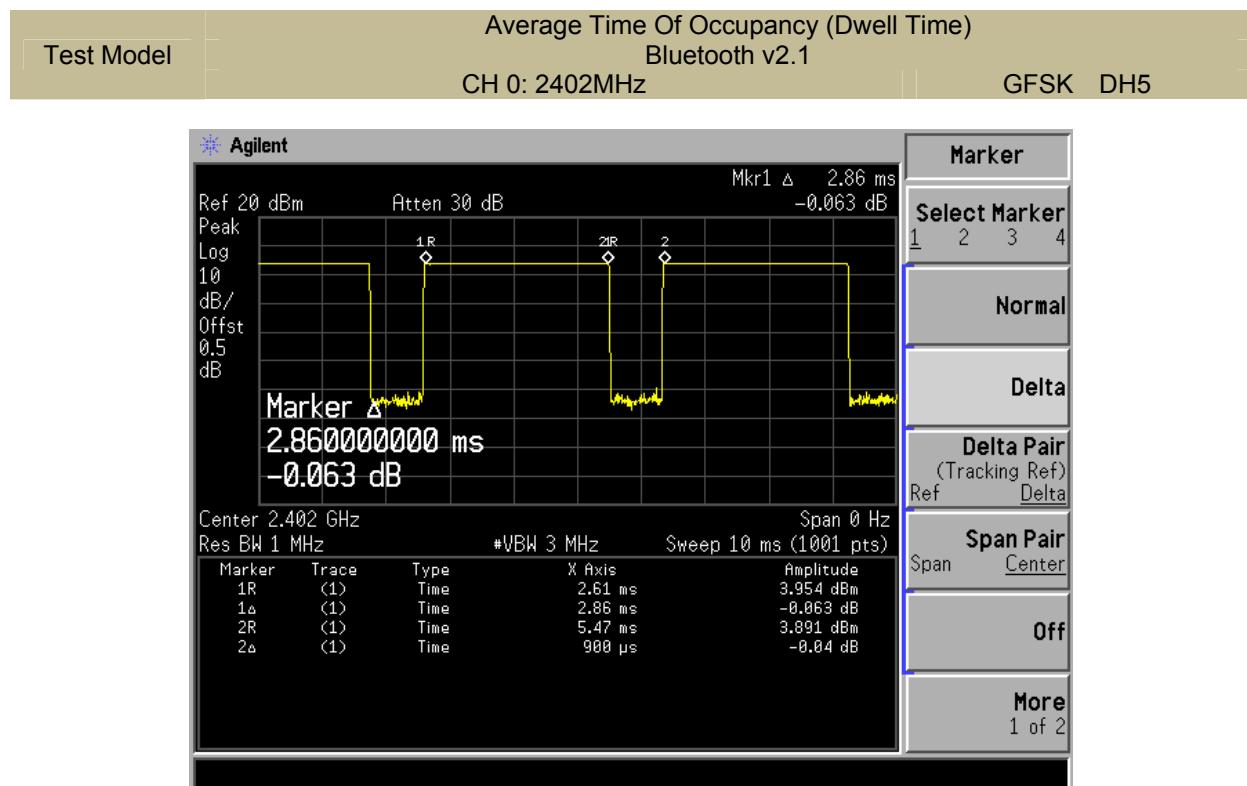

## 8.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

### 8.5.1 Applicable Standard

According to FCC Part 15.247(b)(1) and DA 00-705

### 8.5.2 Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 8.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 8.5.4 Test Procedure

#### ■ According to FCC Part15.247(b)(1)

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel (about 10MHz)

Set RBW > the 20 dB bandwidth of the emission being measured (about 3MHz)

Set VBW  $\geq$  RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold


Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.

## Test Results


Temperature : 28°C      Test Date : November 12, 2014  
Humidity : 55 %      Test By: KK

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
GFSK	0	2402	4.714	30	PASS
	39	2441	5.834	30	PASS
	78	2480	6.124	30	PASS
$\pi/4$ -DQPSK	0	2402	3.849	21	PASS
	39	2441	3.856	21	PASS
	78	2480	4.171	21	PASS
8DPSK	0	2402	4.507	21	PASS
	39	2441	4.409	21	PASS
	78	2480	4.731	21	PASS


Test Model Maximum Peak Conducted Output Power  
Bluetooth v2.1  
Channel 0: 2402MHz GFSK

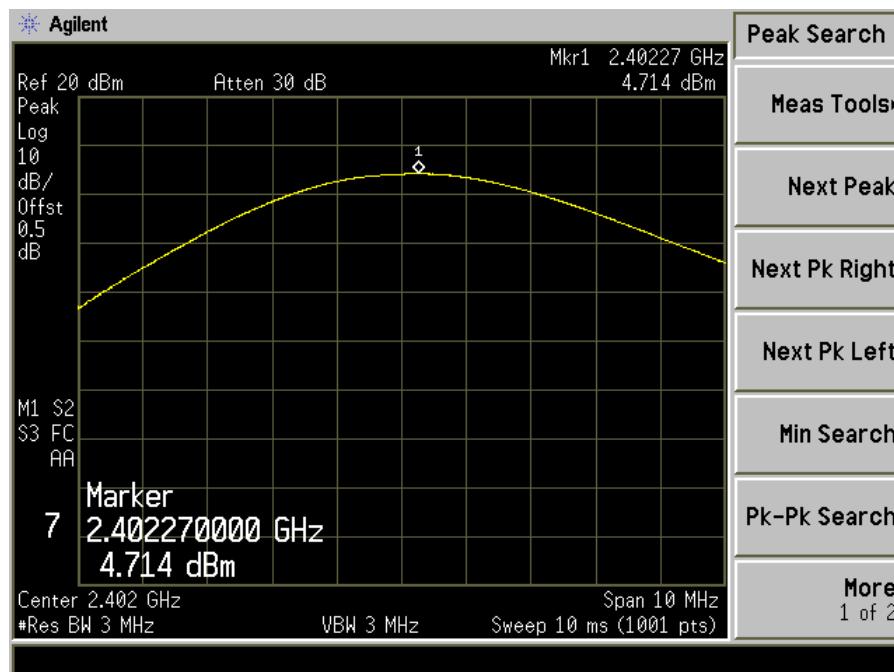


Test Model Maximum Peak Conducted Output Power  
Bluetooth v2.1  
Channel 39: 2441MHz GFSK


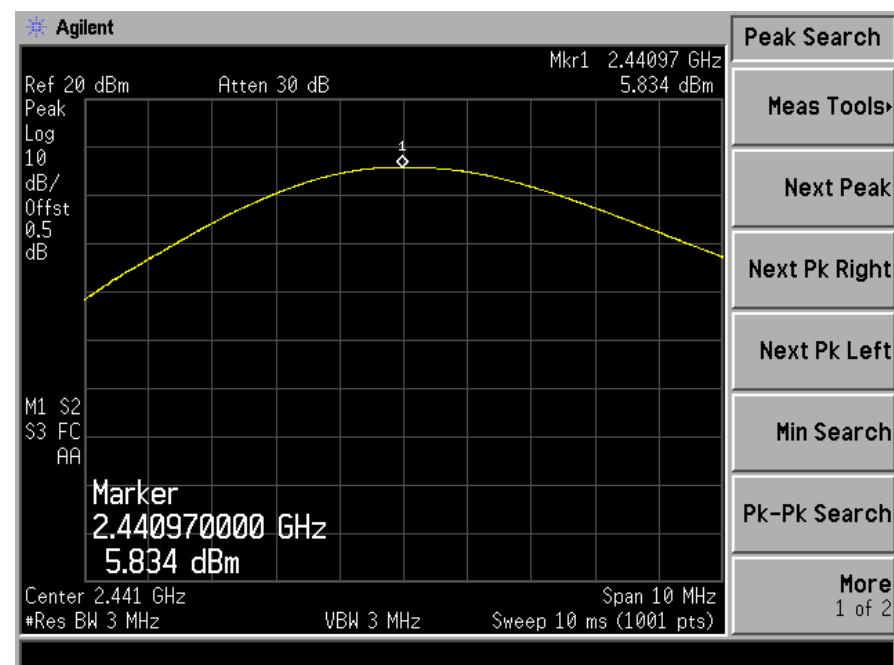


Test Model Maximum Peak Conducted Output Power  
Bluetooth v2.1  
Channel 78: 2480MHz GFSK

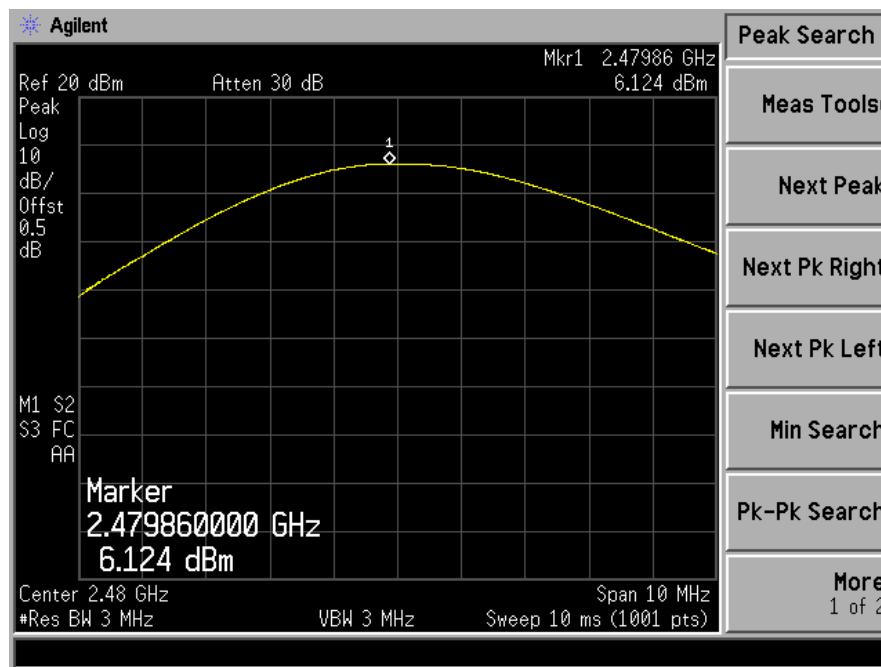


Test Model Maximum Peak Conducted Output Power  
Bluetooth v2.1  
Channel 0: 2402MHz π/4-DQPSK

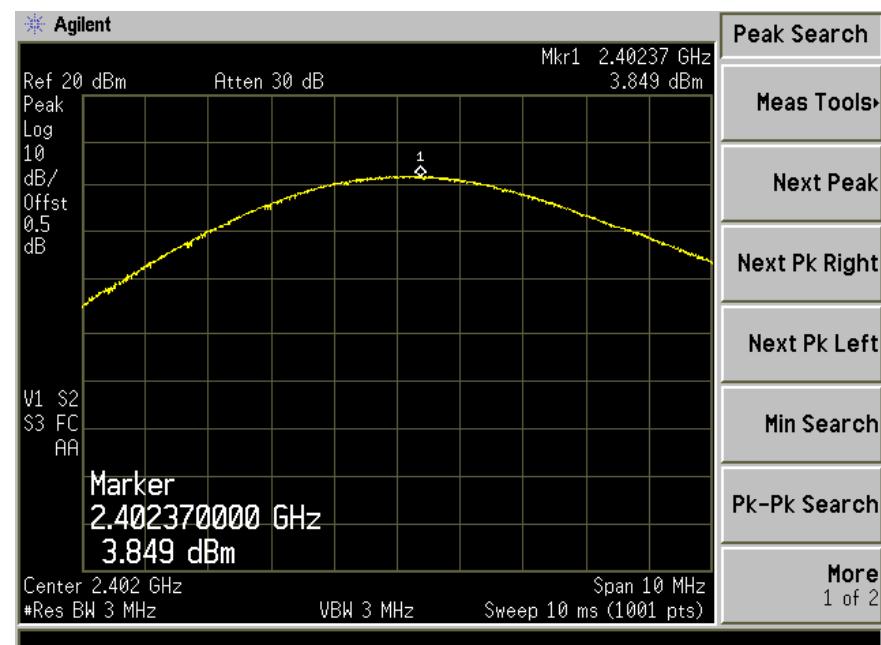


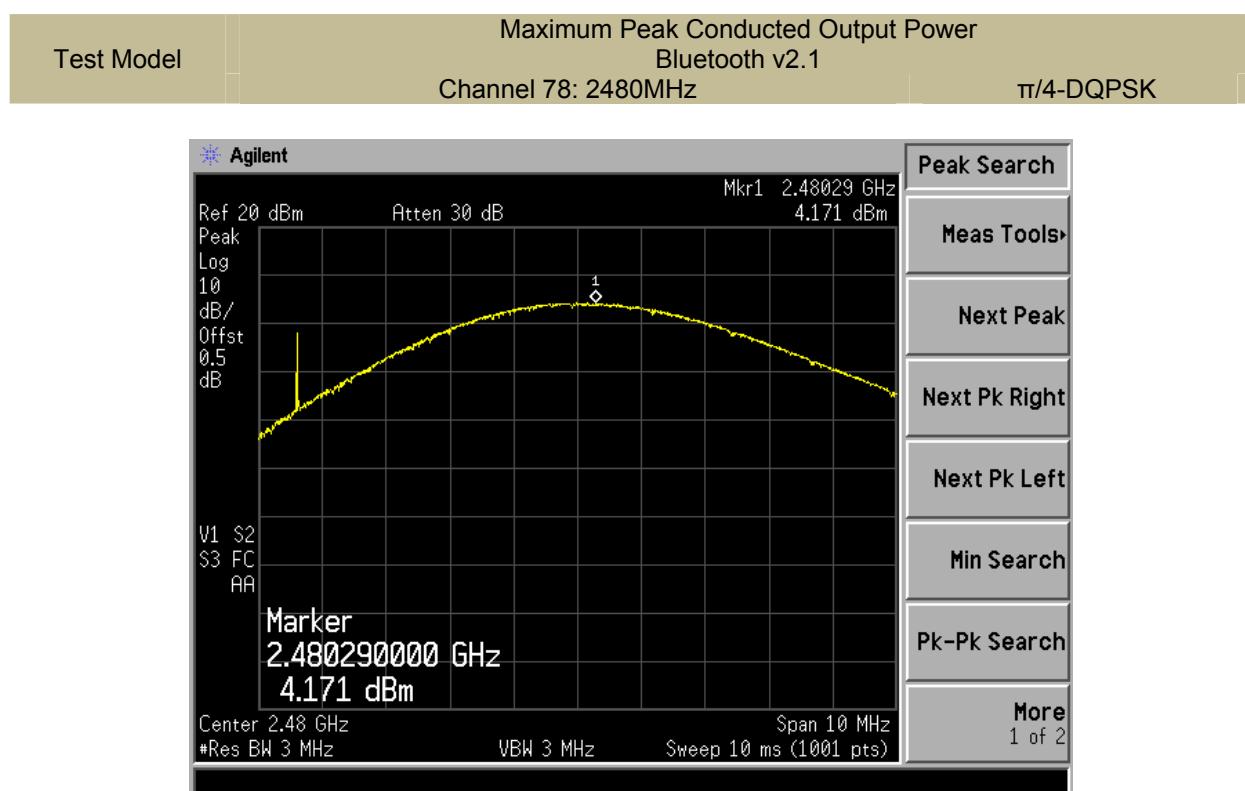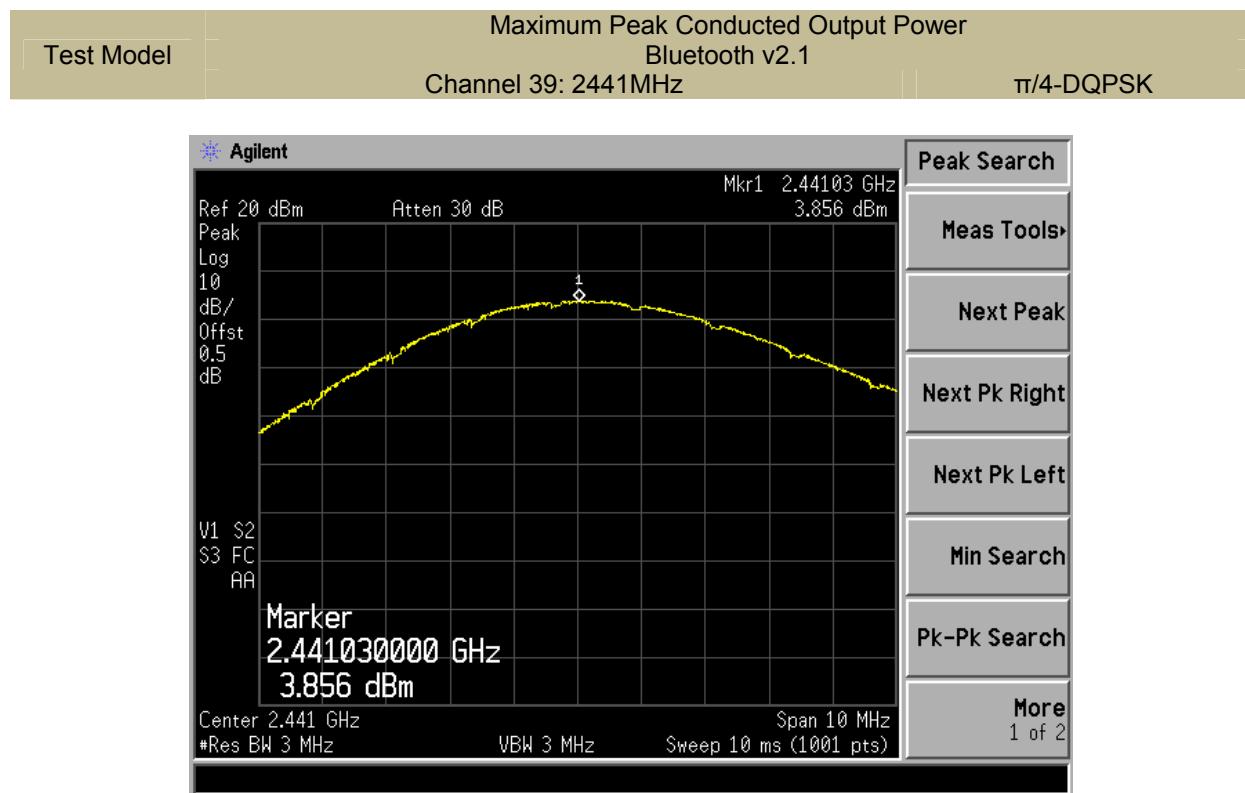


Test Model Maximum Peak Conducted Output Power  
Bluetooth v2.1  
Channel 0: 2402MHz 8DPSK

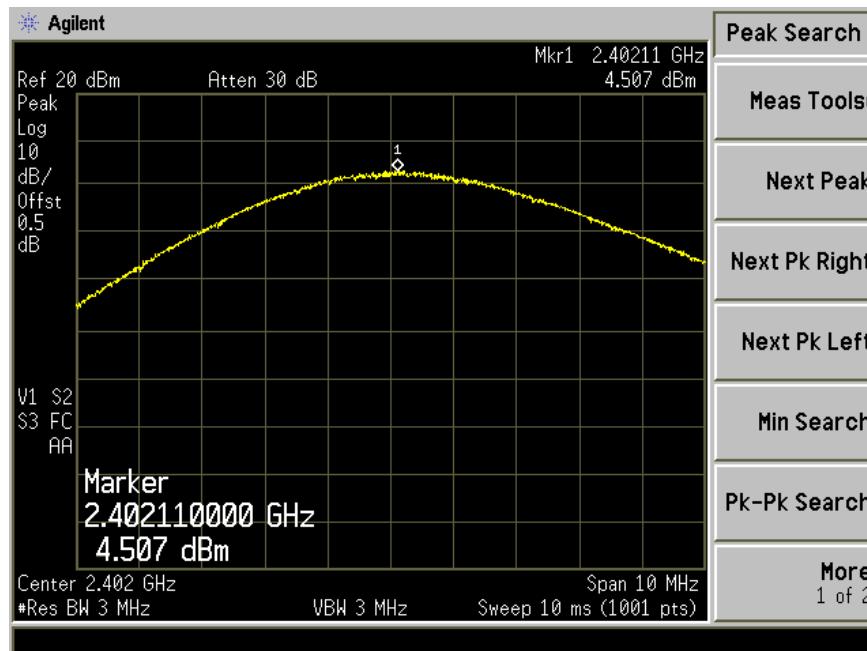

Test Model Maximum Peak Conducted Output Power  
Bluetooth v2.1  
Channel 39: 2441MHz 8DPSK

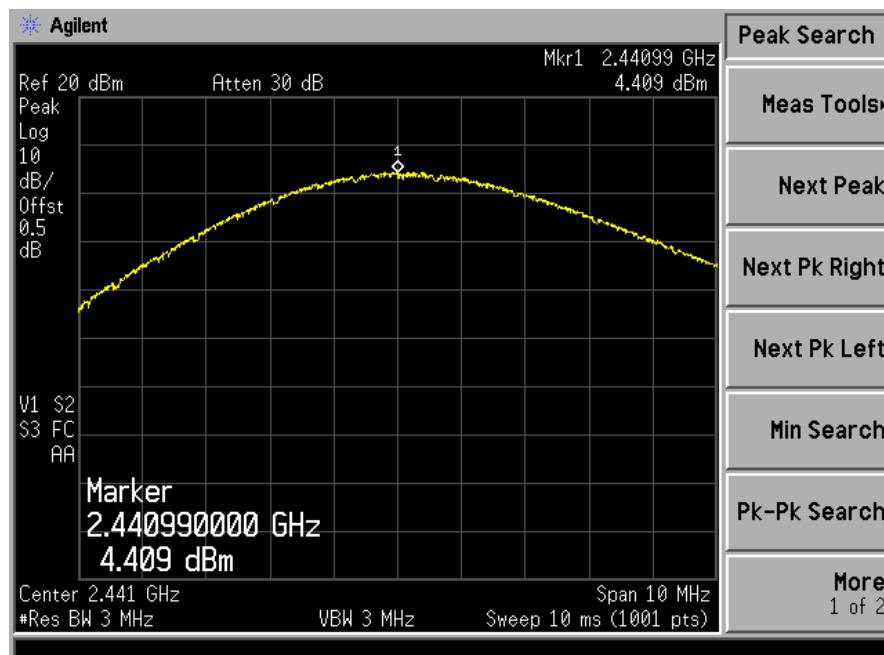

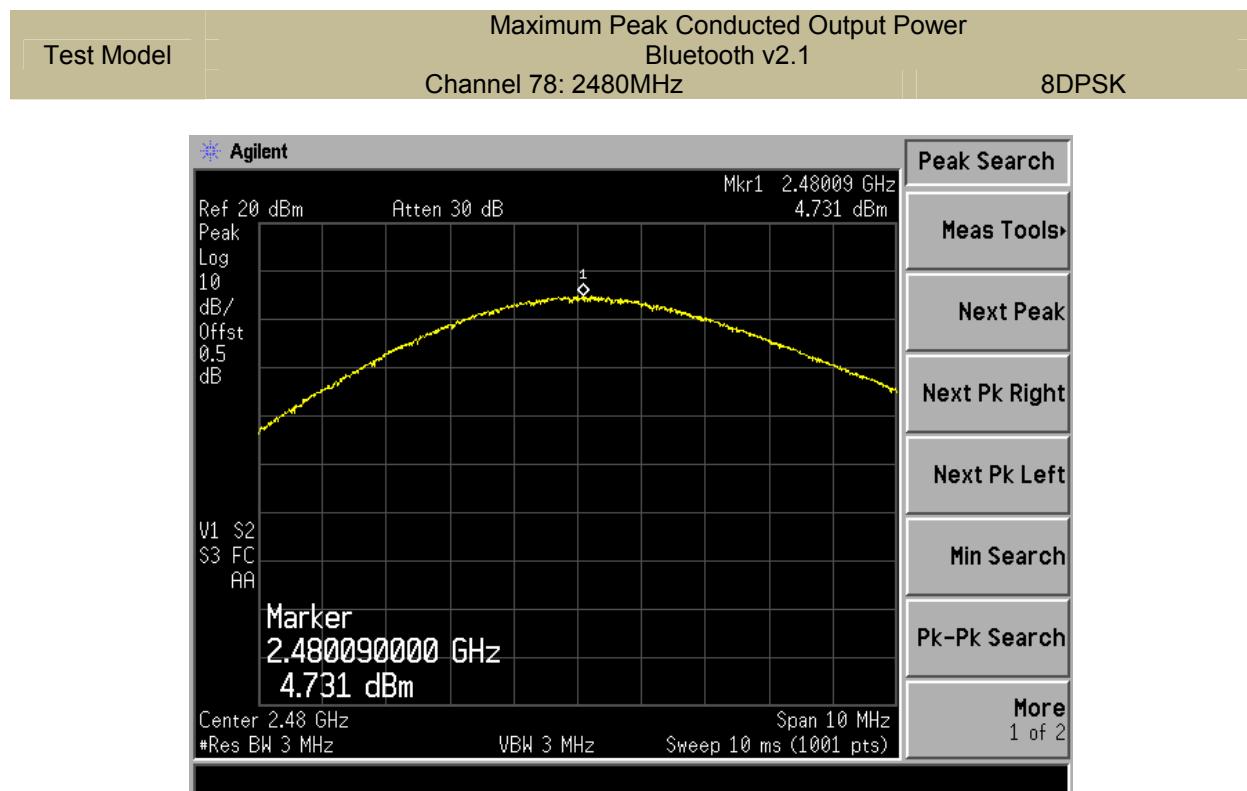

## 8.6 CONDUCTED SUPRIOUS EMISSION

### 8.6.1 Applicable Standard

According to FCC Part 15.247(d) and DA 00-705

### 8.6.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

### 8.6.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 8.6.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

#### ■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel (about 6MHz).

Set the RBW = 100 kHz. Set the VBW  $\geq$  3 x RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximum conducted level.

Note that the channel found to contain the maximum conducted level can be used to establish the reference level.

#### ■ Band-edge Compliance of RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW  $\geq$  1% of the span=100kHz Set VBW  $\geq$  RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.

The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

#### ■ Conducted Spurious RF Conducted Emission



Use the following spectrum analyzer settings:



Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz). Set RBW = 100 kHz Set VBW  $\geq$  RBW



Set Sweep = auto Set Detector function = peak Set Trace = max hold



Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.

### 8.6.5 Test Results

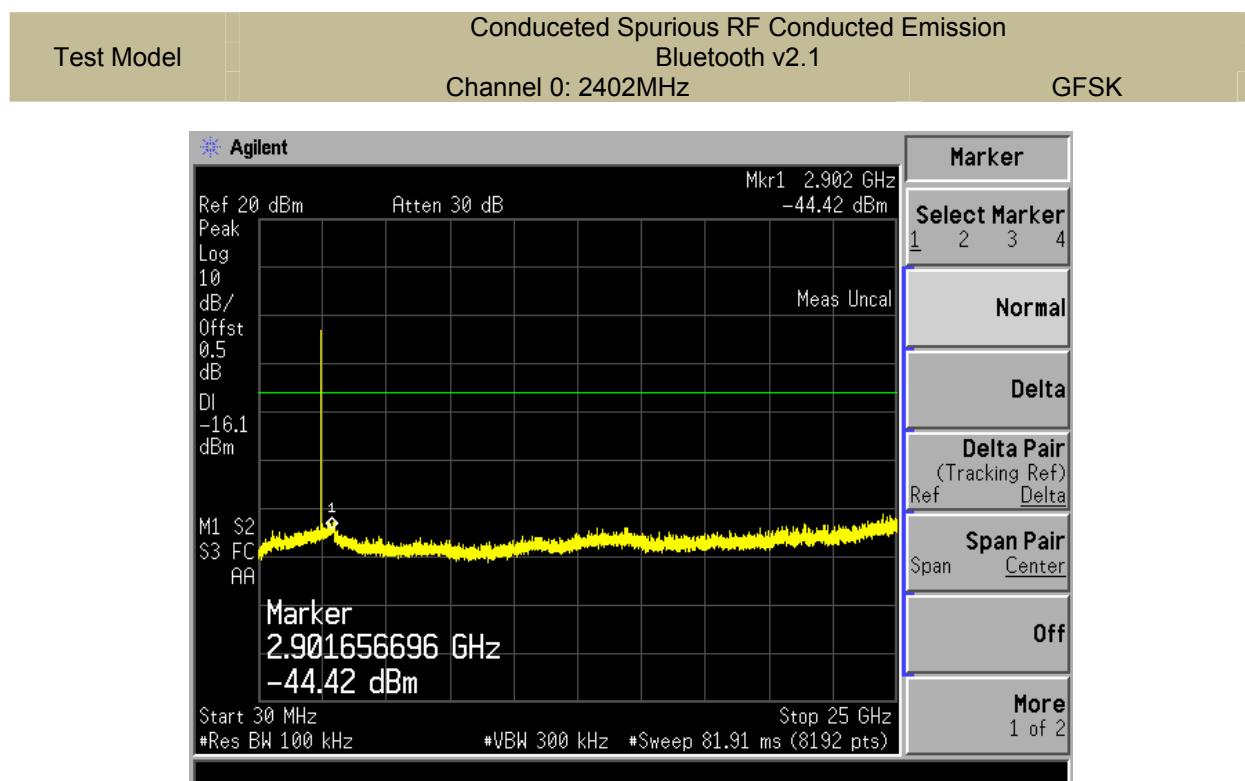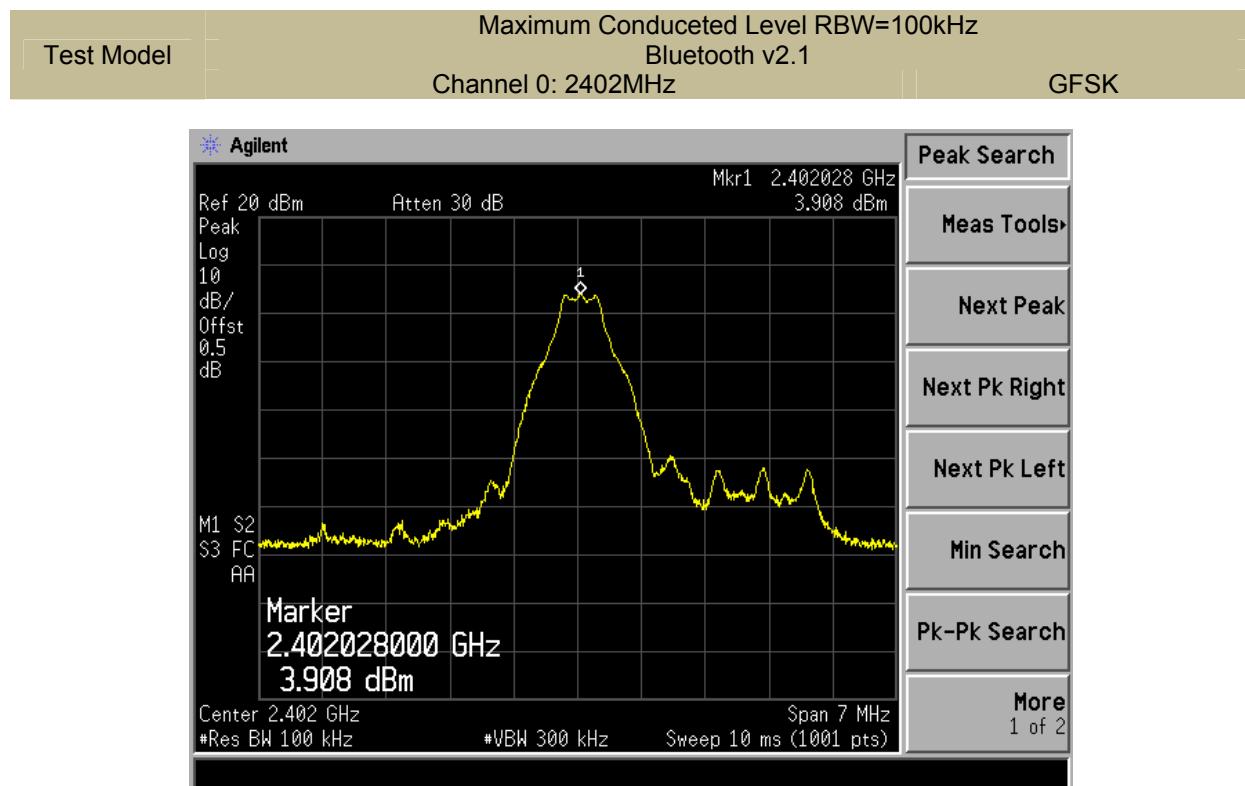

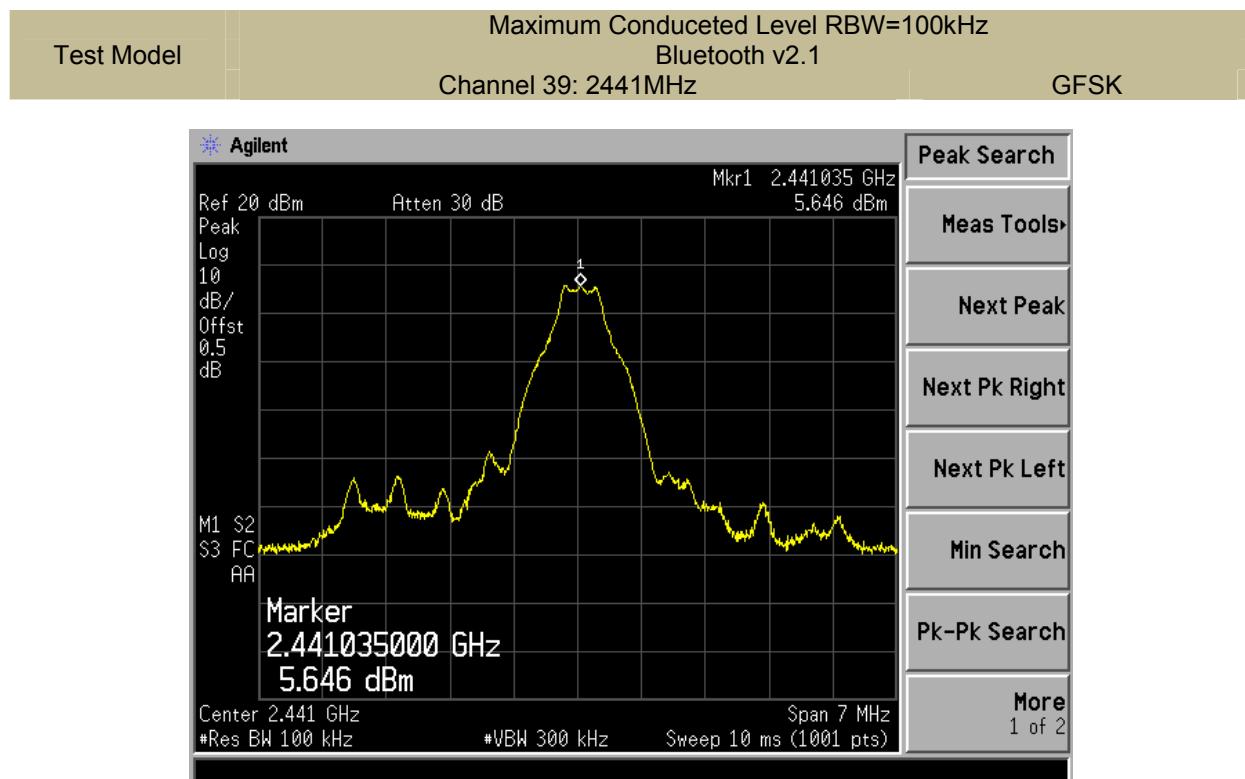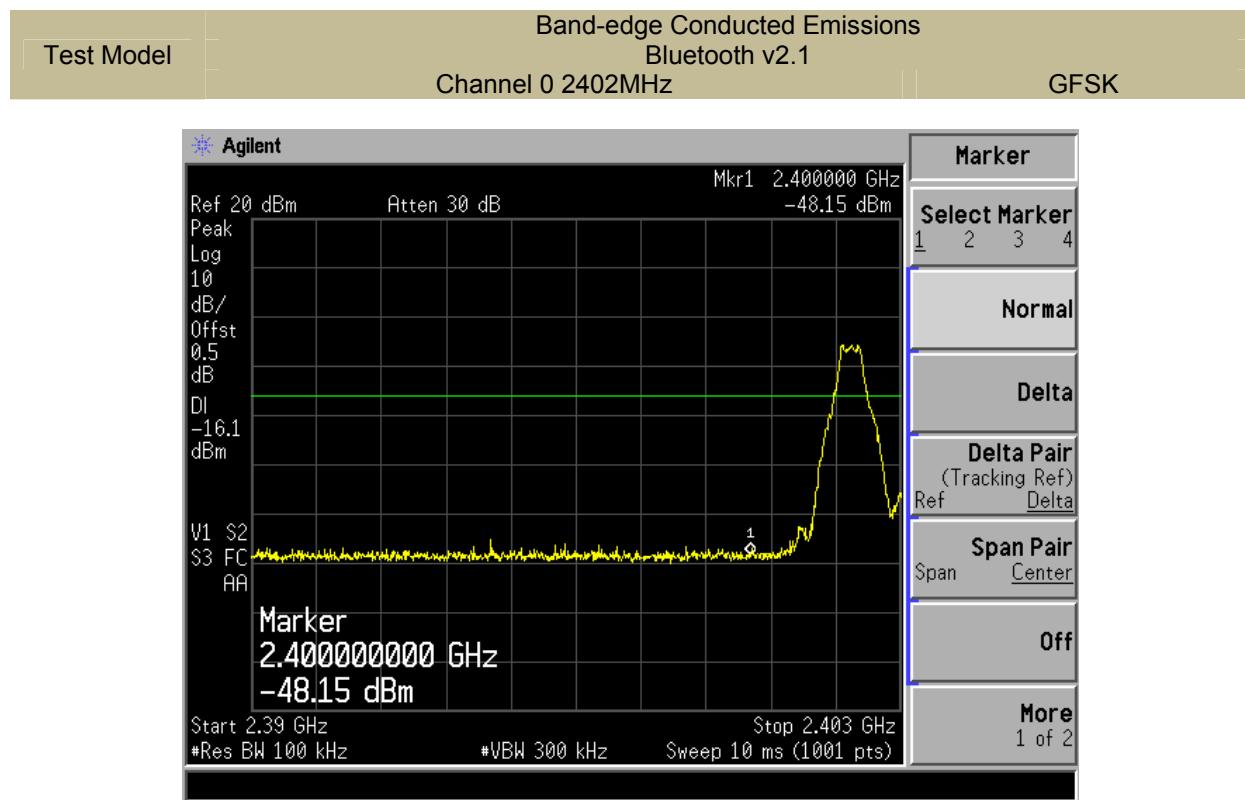

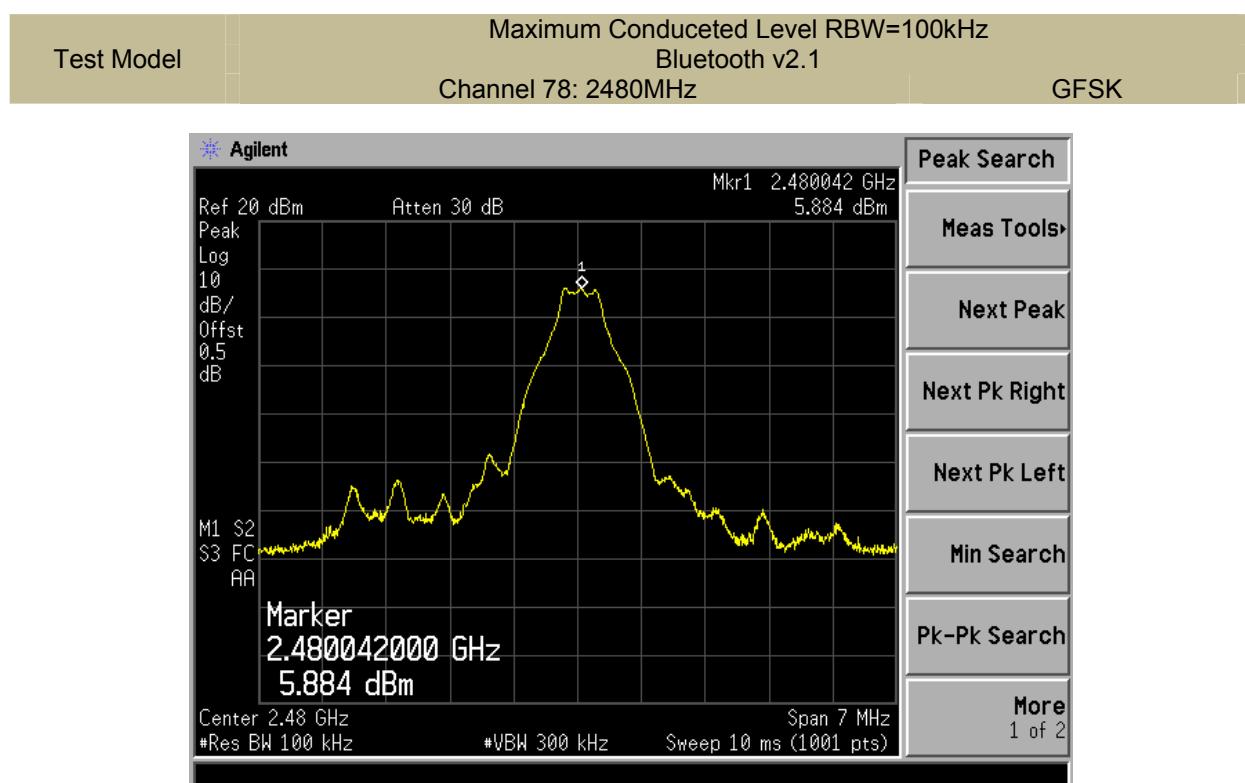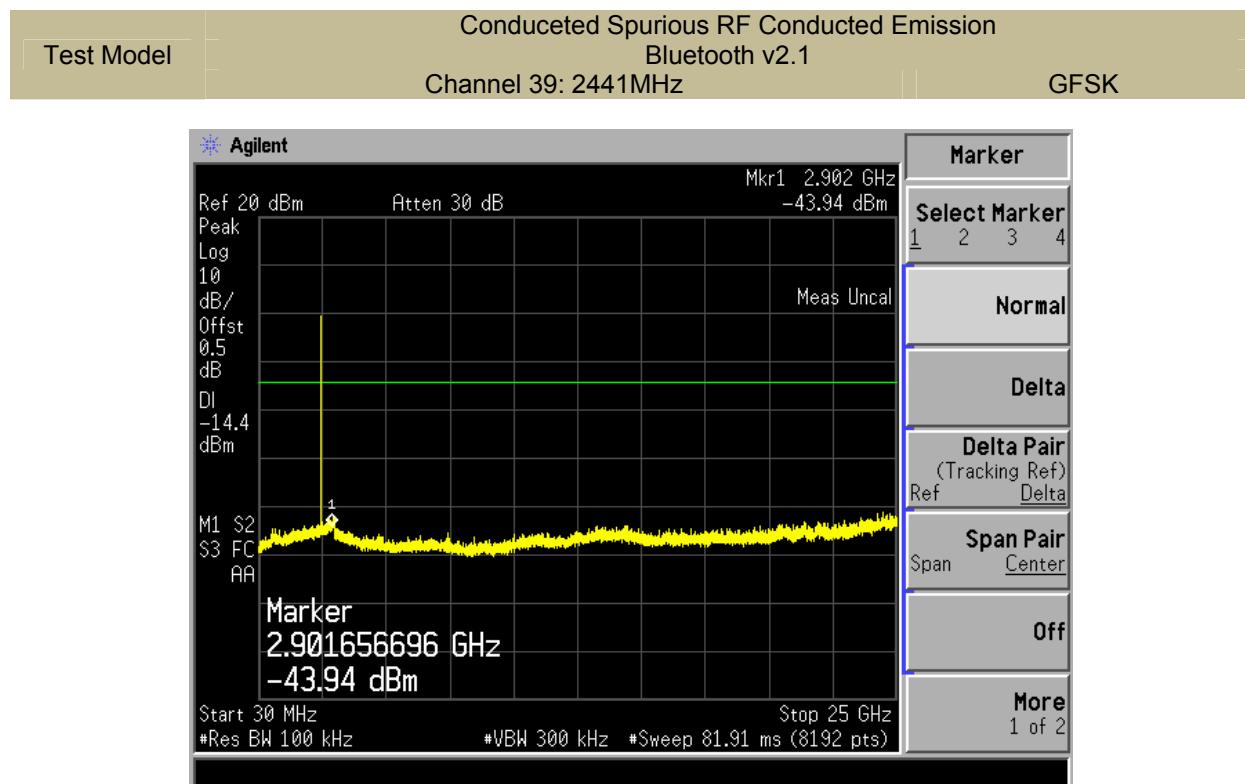

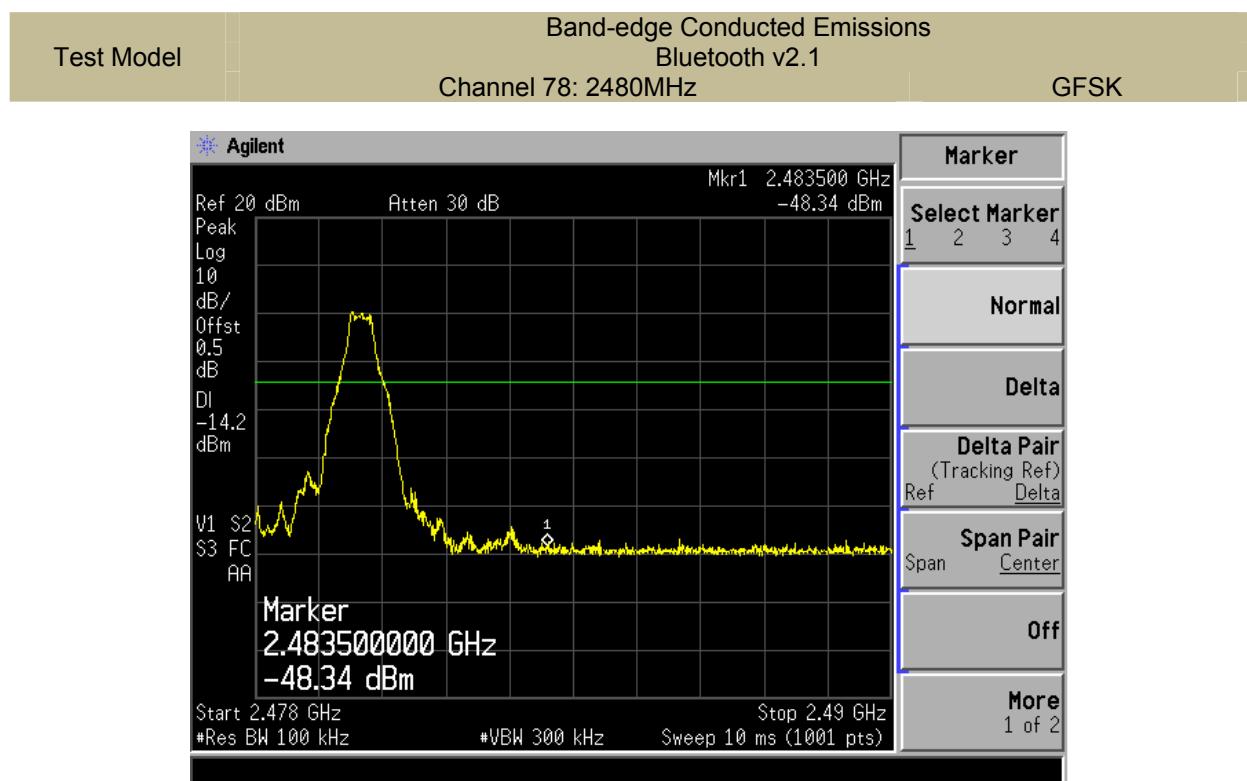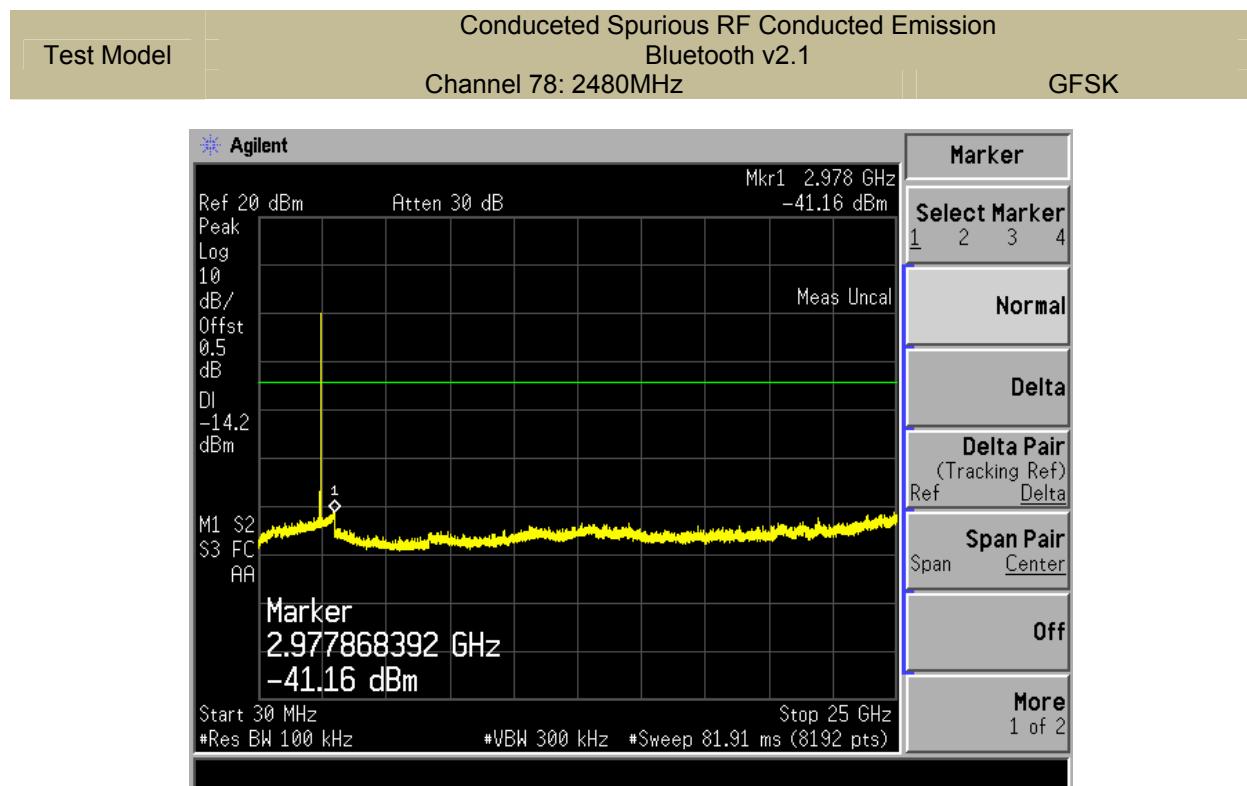

## 8.7 RADIATED SPURIOUS EMISSION

### 8.7.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and DA 00-705

### 8.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Measurement Distance
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

### 8.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

### 8.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz (1GHz to 25GHz), 100 kHz for  $f < 1$  GHz (30MHz to 1GHz)

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.4-1992 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this

test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data. Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

### 8.7.5 Test Results

#### ■ Spurious Emission Above 1GHz (1GHz to 25GHz)

Bluetooth v2.1 GFSK mode have been tested, and the worst result was report as below:

Temperature :	28°C	Test Date :	November 12, 2014
Humidity :	55 %	Test By:	KK
Test mode:	GFSK	Frequency:	Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol. H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	PK(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Verdict
4451.63	V	53.95	74.00	36.05	54.00	PASS
7071.88	V	54.51	74.00	35.49	54.00	PASS
7823.88	V	60.84	74.00	44.36	54.00	PASS
--	--	--	--	--	--	--
--	--	--	--	--	--	--
4157.88	H	55.81	74.00	34.19	54.00	PASS
4627.88	H	54.16	74.00	35.84	54.00	PASS
7953.13	H	53.50	74.00	36.50	54.00	PASS

Temperature :	28°C	Test Date :	November 12, 2014
Humidity :	55 %	Test By:	KK
Test mode:	GFSK	Frequency:	Channel 39: 2441MHz

Freq. (MHz)	Ant.Pol. H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	PK(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Verdict
4451.63	V	53.88	74.00	36.12	54.00	PASS
6378.63	V	61.08	74.00	42.58	54.00	PASS
8117.63	V	53.80	74.00	36.20	54.00	PASS
--	--	--	--	--	--	--
--	--	--	--	--	--	--
3088.63	H	53.57	74.00	36.43	54.00	PASS
4639.63	H	53.68	74.00	36.32	54.00	PASS
6531.38	H	52.92	74.00	37.08	54.00	PASS

Temperature : 28°C Test Date : November 12, 2014  
 Humidity : 55 % Test By: KK  
 Test mode: GFSK Frequency: Channel 78: 2480MHz

Freq. (MHz)	Ant.Pol. H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	PK(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Verdict
3394.22	V	59.10	74.00	39.08	54.00	PASS
4169.72	V	61.57	74.00	47.55	54.00	PASS
4639.72	V	60.40	74.00	39.04	54.00	PASS
--	--	--	--	--	--	--
--	--	--	--	--	--	--
3394.22	H	60.40	74.00	38.12	54.00	PASS
4463.47	H	63.54	74.00	46.86	54.00	PASS
7083.72	H	55.53	74.00	37.88	54.00	PASS

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
 (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Temperature : 28°C Test Date : November 12, 2014  
 Humidity : 55 % Test By: KK  
 Test mode: GFSK Frequency: Channel 0: 2402MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
2340.64	H	39.64	74	30.18	54
2390.00	V	39.17	74	34.80	54

Temperature : 28°C Test Date : November 12, 2014  
 Humidity : 55 % Test By: KK  
 Test mode: GFSK Frequency: Channel 78: 2480MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
2497.51	H	39.82	74	35.30	54
2492.64	V	40.38	74	36.00	54

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
 (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

All the modulation modes were tested, the data of the worst mode are described in the following table

## Test Model


Spurious Emission in Restricted Band 2310-2390MHz  
Bluetooth v2.1  
Channel 0: 2402MHz

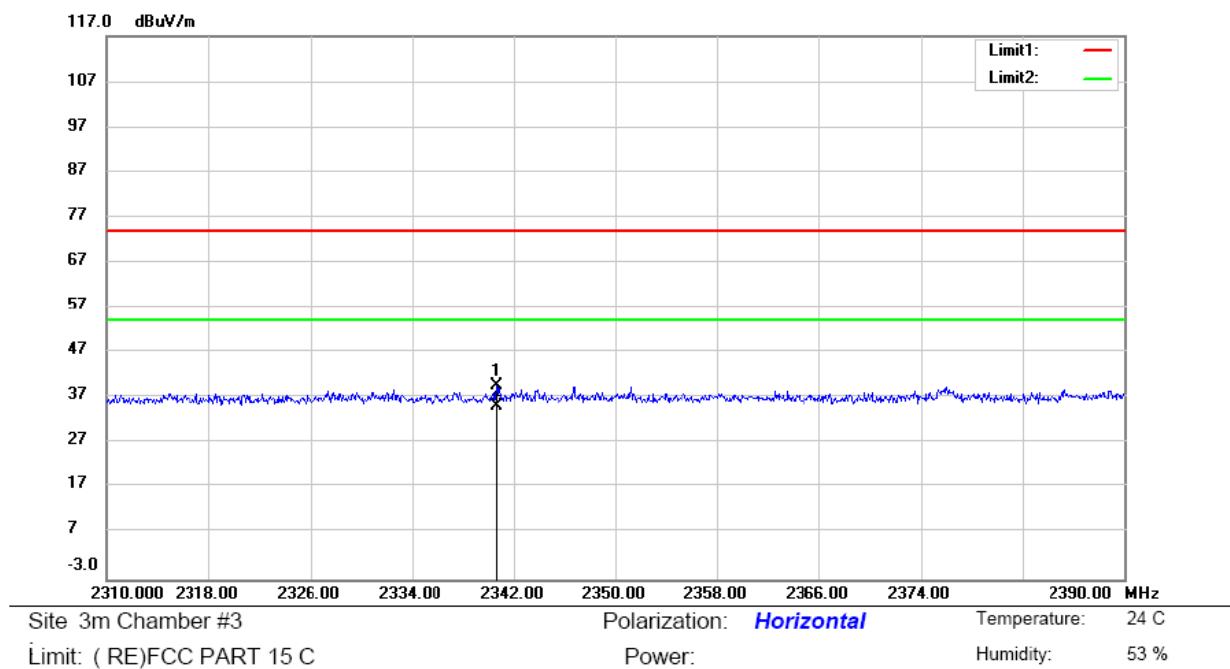


## Test Model

# Spurious Emission in Restricted Band 2483.5-2500MHz Bluetooth v2.1


## Channel 0: 2402MHz

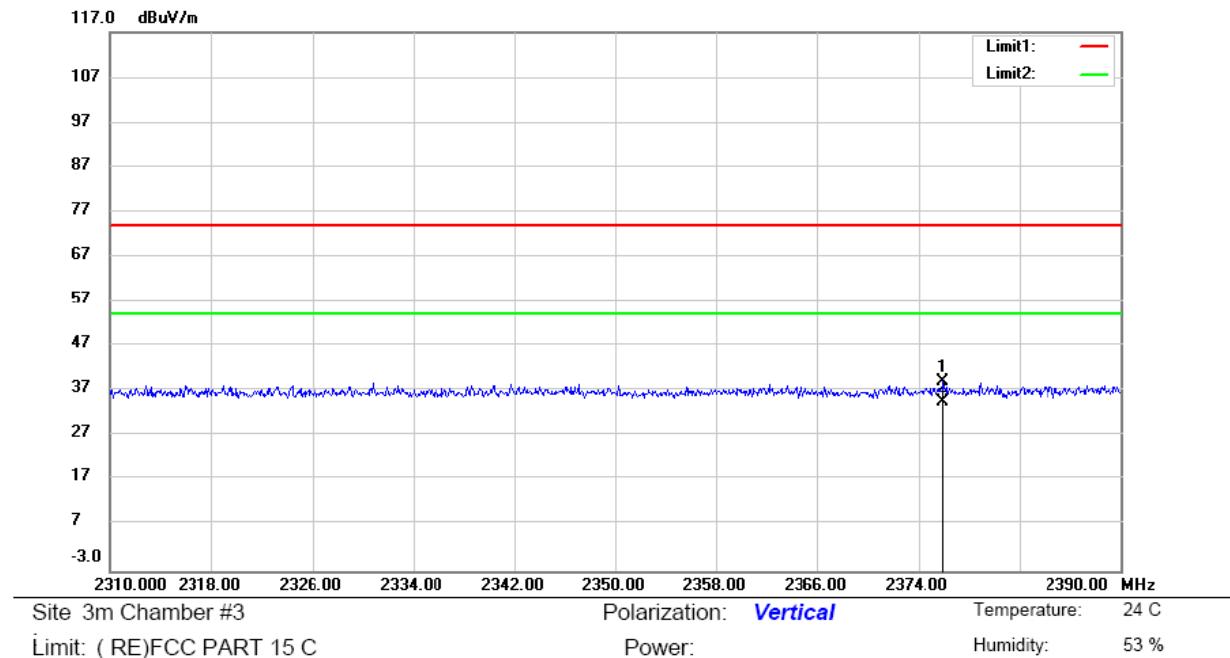

Test Model Spurious Emission in Restricted Band 2310-2390MHz  
Bluetooth v2.1  
Channel 78: 2480MHz

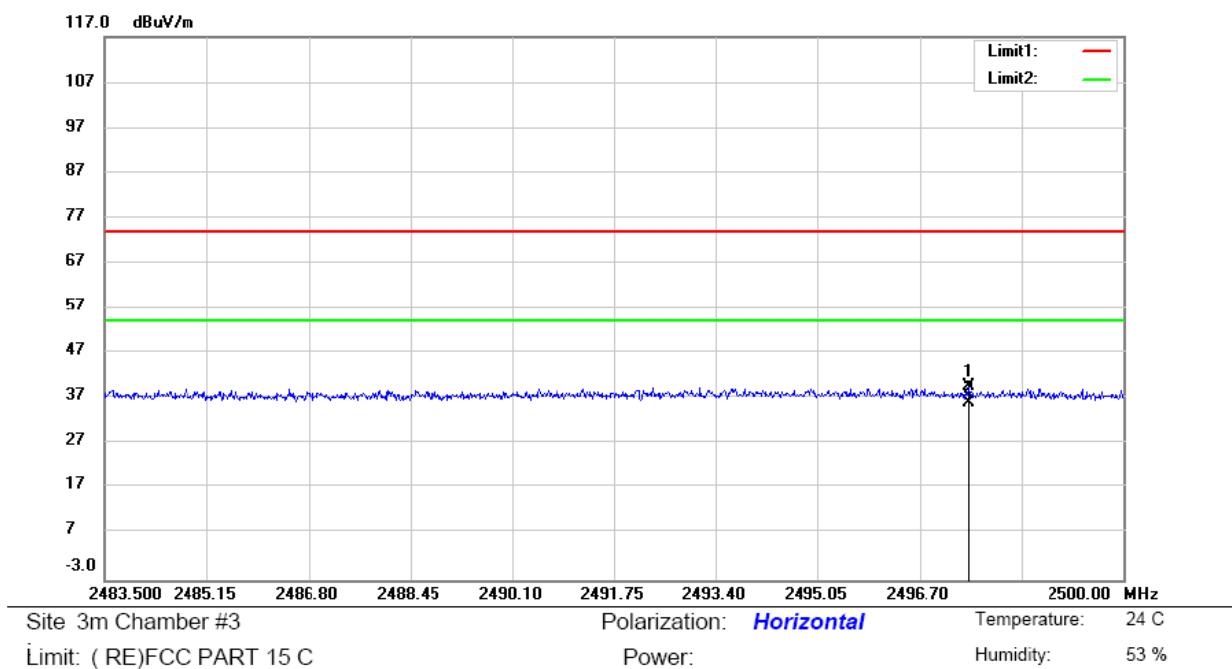


Test Model Spurious Emission in Restricted Band 2483.5-2500MHz  
Bluetooth v2.1  
Channel 78: 2480MHz

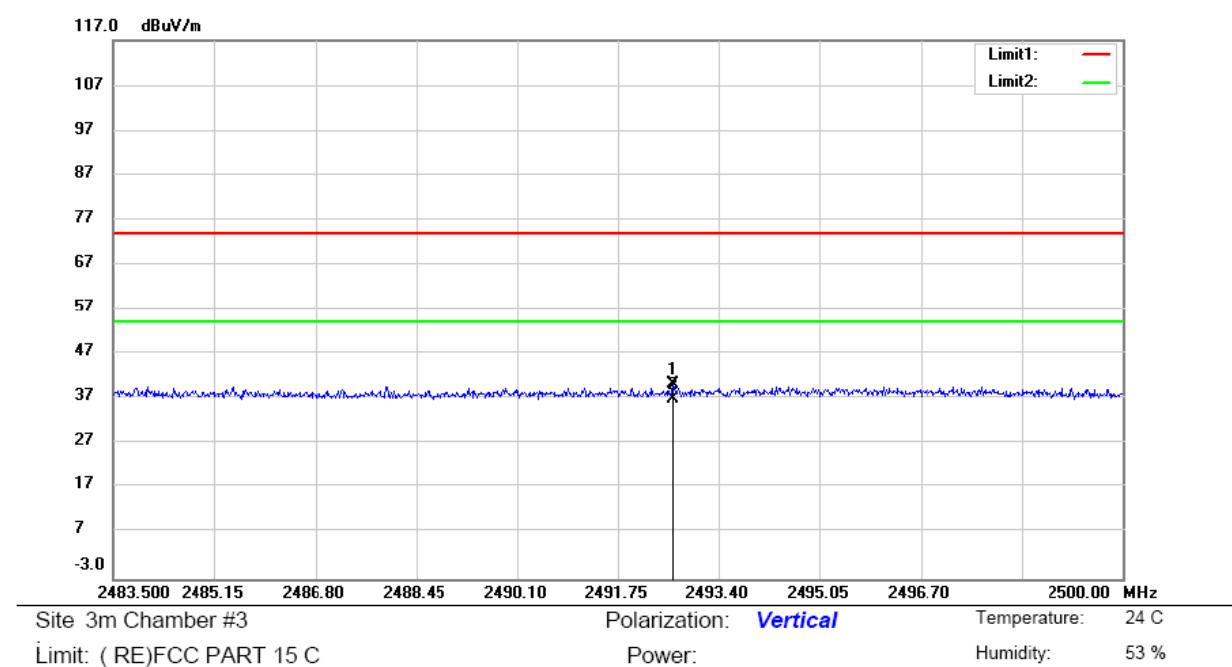

■ Spurious Emission below 1GHz (30MHz to 1GHz)


Bluetooth v2.1 mode have been tested, and the worst result was report as below:

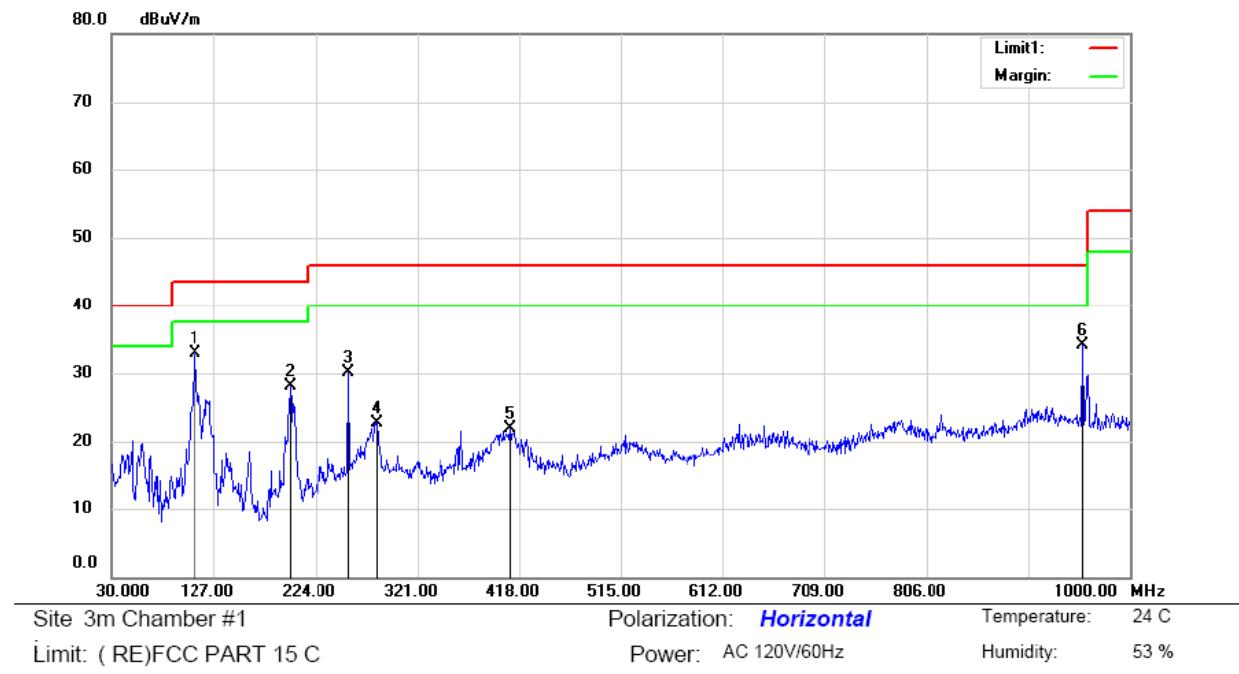

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	109.5400	47.45	-14.55	32.90	43.50	-10.60	QP		
2		199.7500	45.23	-17.18	28.05	43.50	-15.45	QP		
3		255.0400	43.82	-13.63	30.19	46.00	-15.81	QP		
4		283.1700	35.51	-12.81	22.70	46.00	-23.30	QP		
5		409.2700	32.27	-10.38	21.89	46.00	-24.11	QP		
6		955.3800	39.36	-5.16	34.20	46.00	-11.80	QP		


\*:Maximum data    x:Over limit    !:over margin

Operator: ZHL

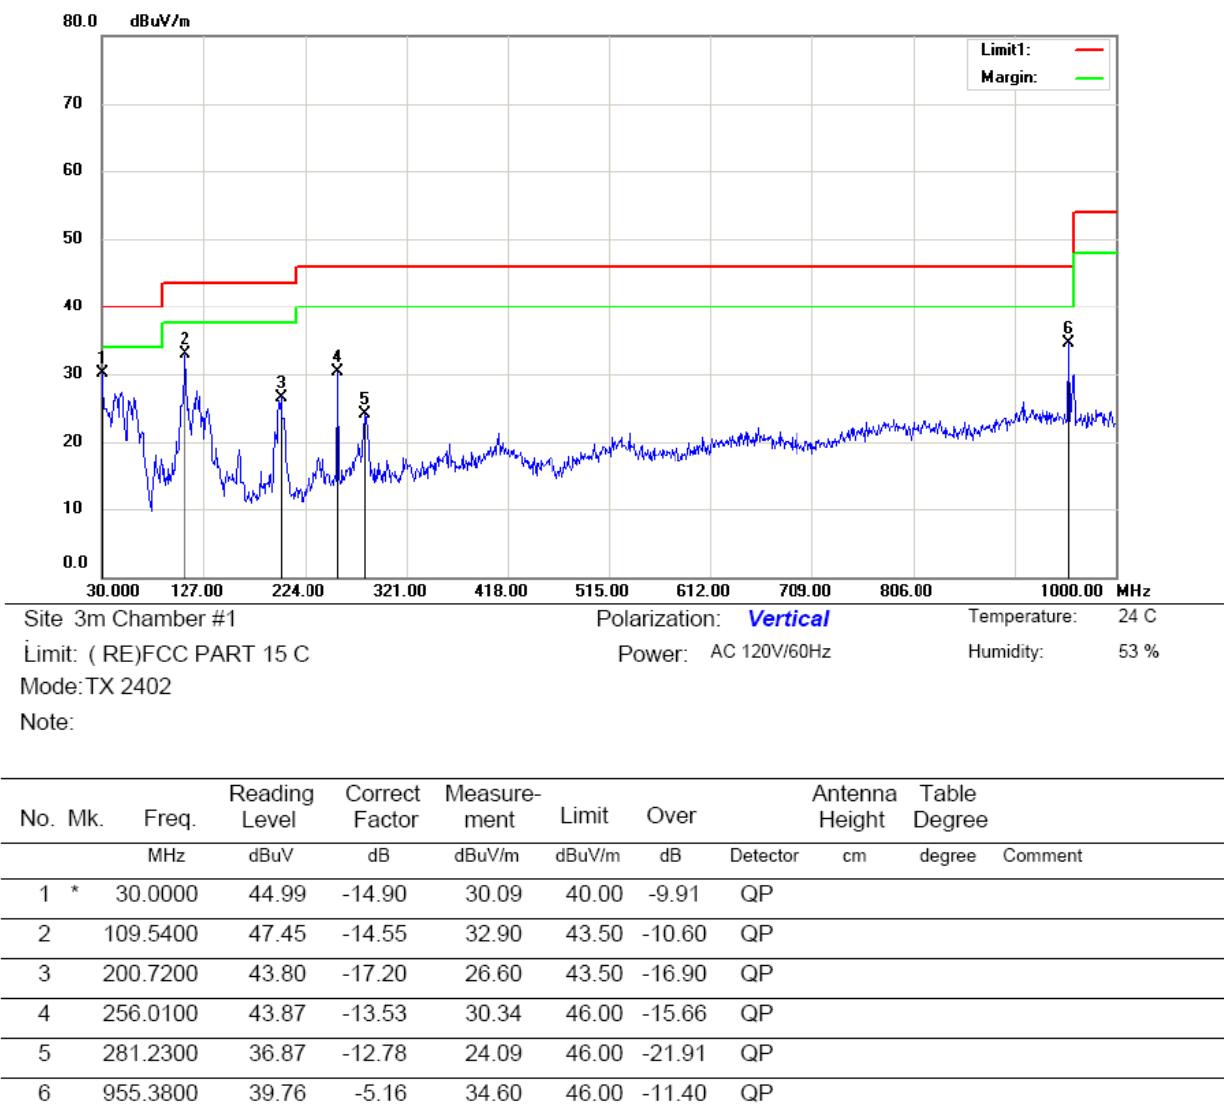


\*:Maximum data    x:Over limit    !:over margin

Operator: ZHL

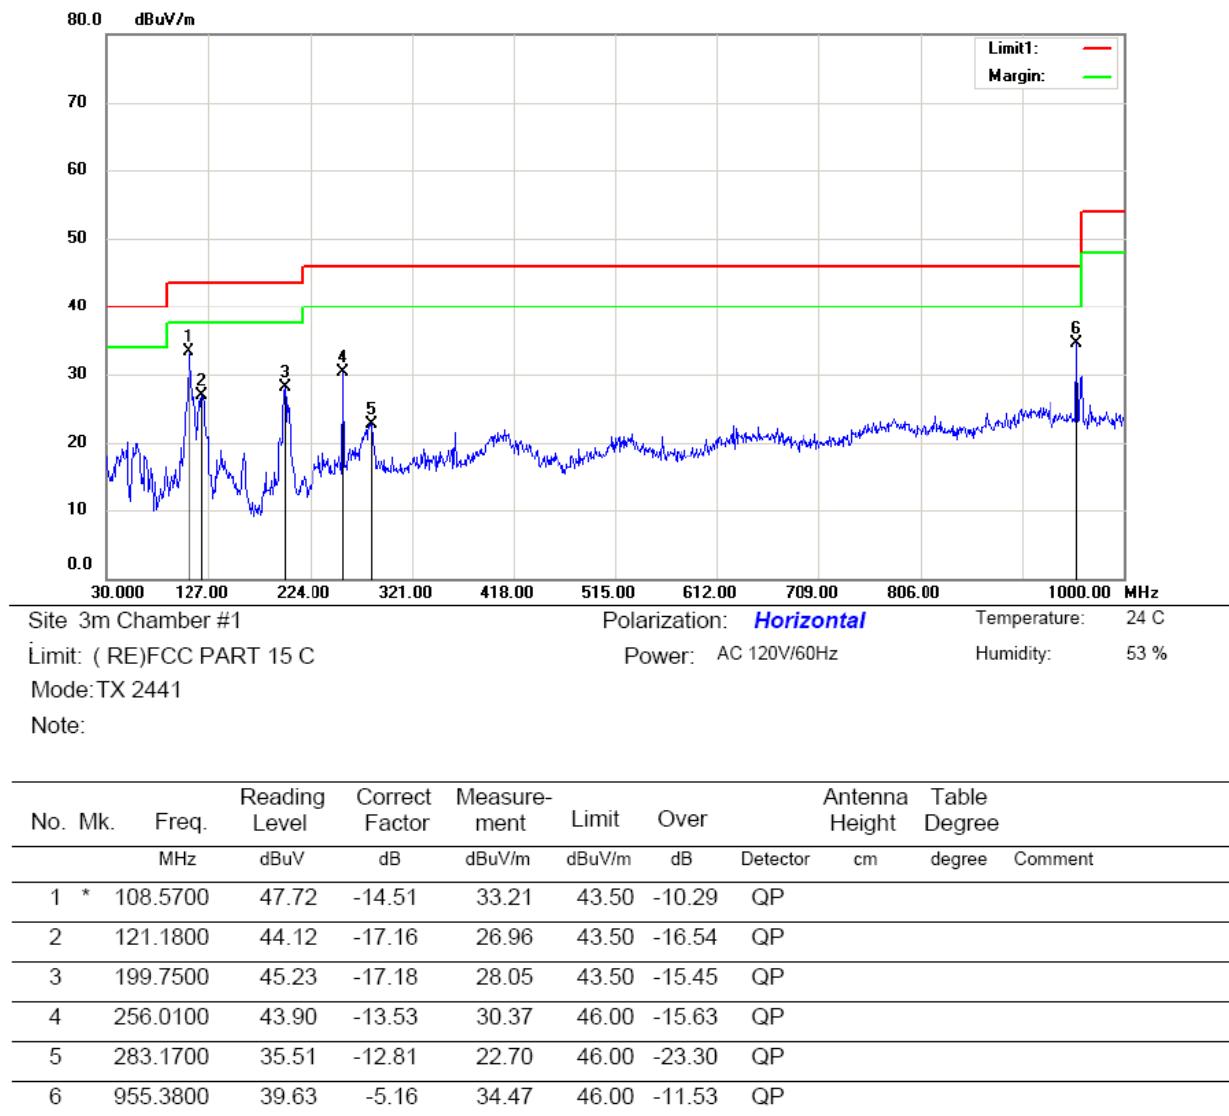

\*:Maximum data    x:Over limit    !:over margin


Operator: ZHL

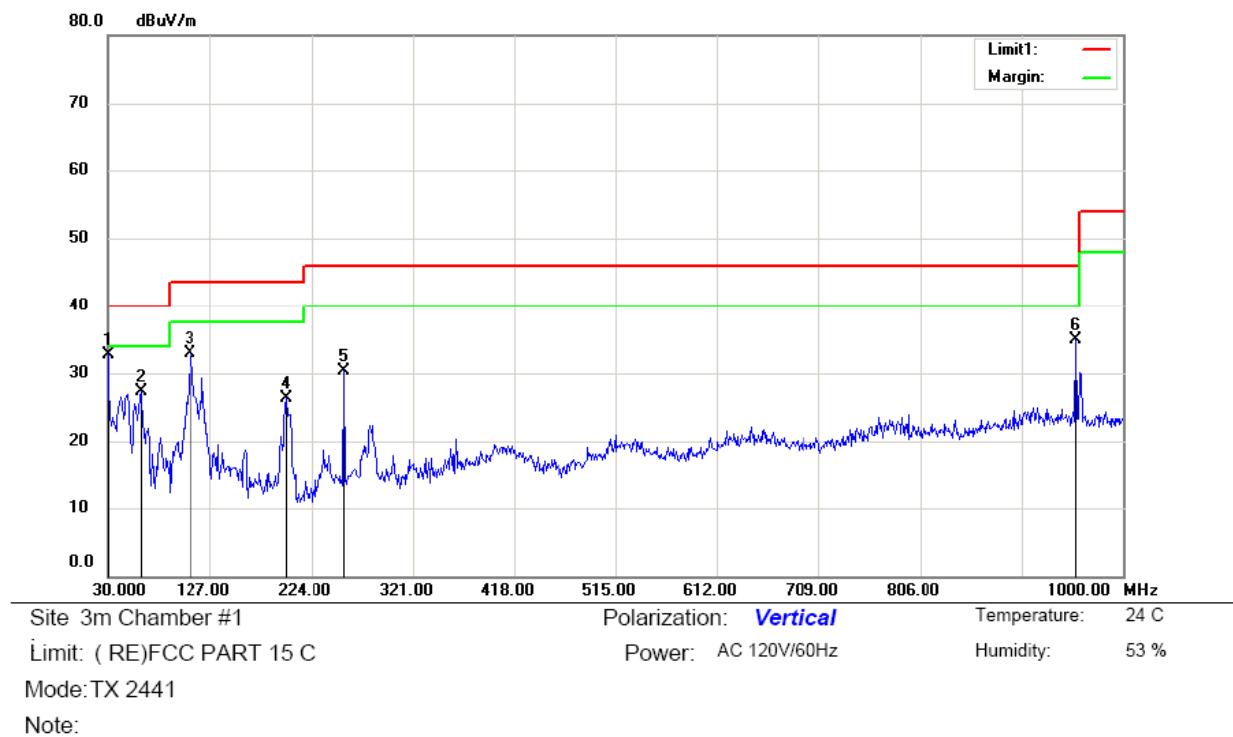

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Antenna Height cm	Table Degree	Comment
			Level dBuV	Factor dB	ment dBuV/m					
1	*	30.0000	47.66	-14.90	32.76	40.00	-7.24	QP		
2		61.0400	41.92	-14.60	27.32	40.00	-12.68	QP		
3		108.5700	47.34	-14.51	32.83	43.50	-10.67	QP		
4		199.7500	43.57	-17.18	26.39	43.50	-17.11	QP		
5		255.0400	43.84	-13.63	30.21	46.00	-15.79	QP		
6		955.3800	40.13	-5.16	34.97	46.00	-11.03	QP		

\*:Maximum data    x:Over limit    !:over margin


Operator: ZHL

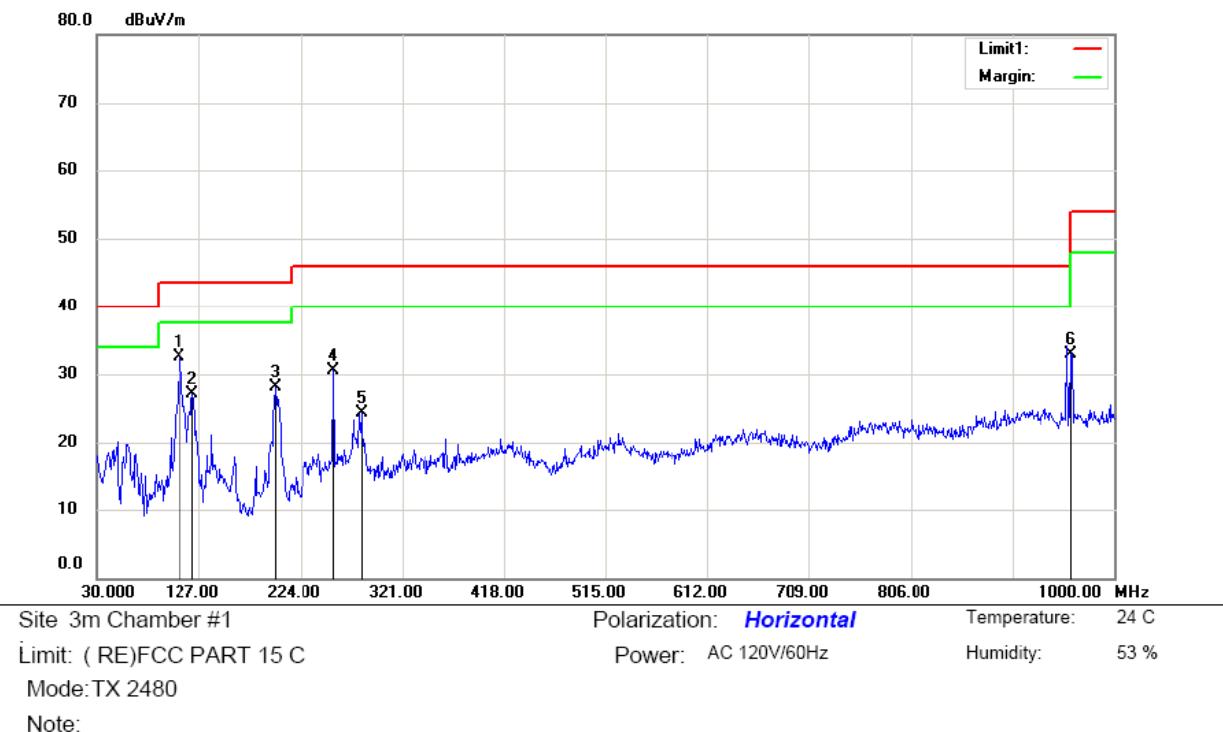

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Antenna Height cm	Table Degree	Comment
			Level dBuV	Factor dB	ment dBuV/m					
1	*	108.5700	46.99	-14.51	32.48	43.50	-11.02	QP		
2		121.1800	44.27	-17.16	27.11	43.50	-16.39	QP		
3		199.7500	45.26	-17.18	28.08	43.50	-15.42	QP		
4		256.0100	44.11	-13.53	30.58	46.00	-15.42	QP		
5		282.2000	37.03	-12.79	24.24	46.00	-21.76	QP		
6		959.2600	38.10	-5.19	32.91	46.00	-13.09	QP		

\*:Maximum data    x:Over limit    !:over margin

Operator: ZHL

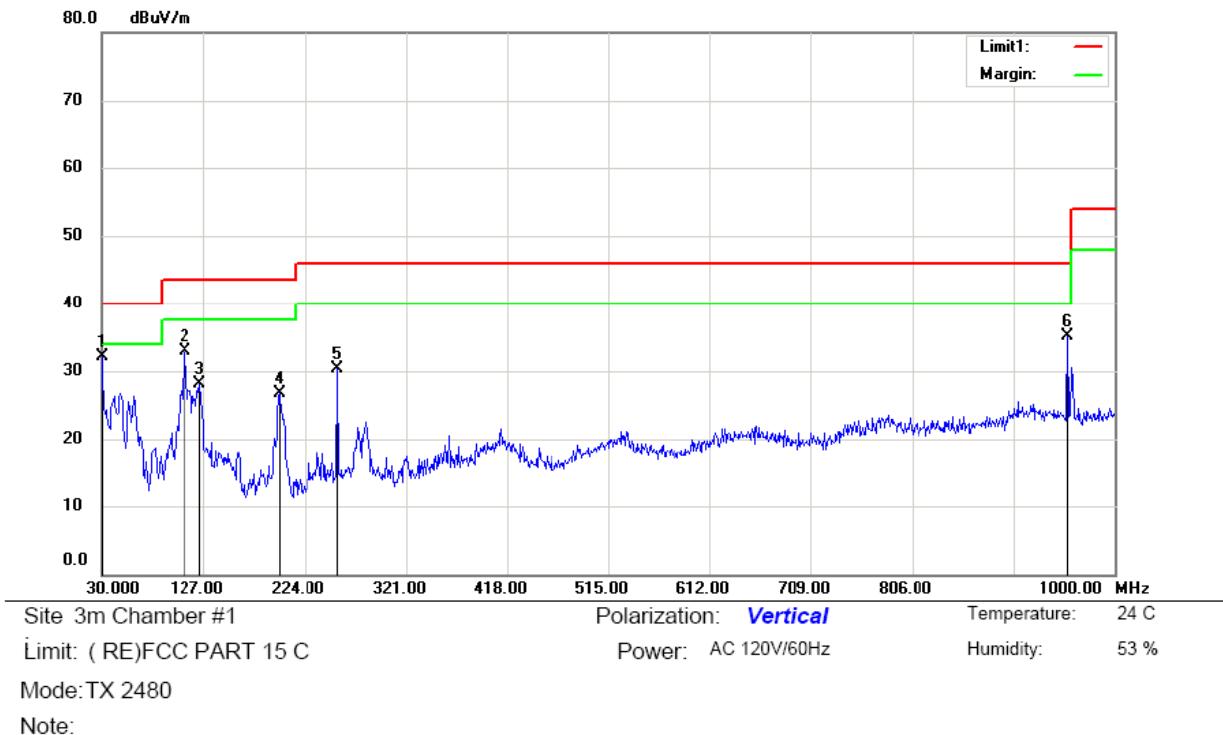

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	30.0000	47.01	-14.90	32.11	40.00	-7.89	QP			
2		109.5400	47.36	-14.55	32.81	43.50	-10.69	QP			
3		123.1200	45.50	-17.34	28.16	43.50	-15.34	QP			
4		199.7500	43.88	-17.18	26.70	43.50	-16.80	QP			
5		256.0100	43.85	-13.53	30.32	46.00	-15.68	QP			
6		955.3800	40.23	-5.16	35.07	46.00	-10.93	QP			

\*:Maximum data    x:Over limit    !:over margin

Operator: ZHL

## 8.8 CONDUCTED EMISSION TEST

### 8.8.1 Applicable Standard

According to FCC Part 15.207(a)

### 8.8.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


### 8.8.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

### 8.8.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.  
Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
Repeat above procedures until all frequency measured were complete.

### 8.8.5 Test Results

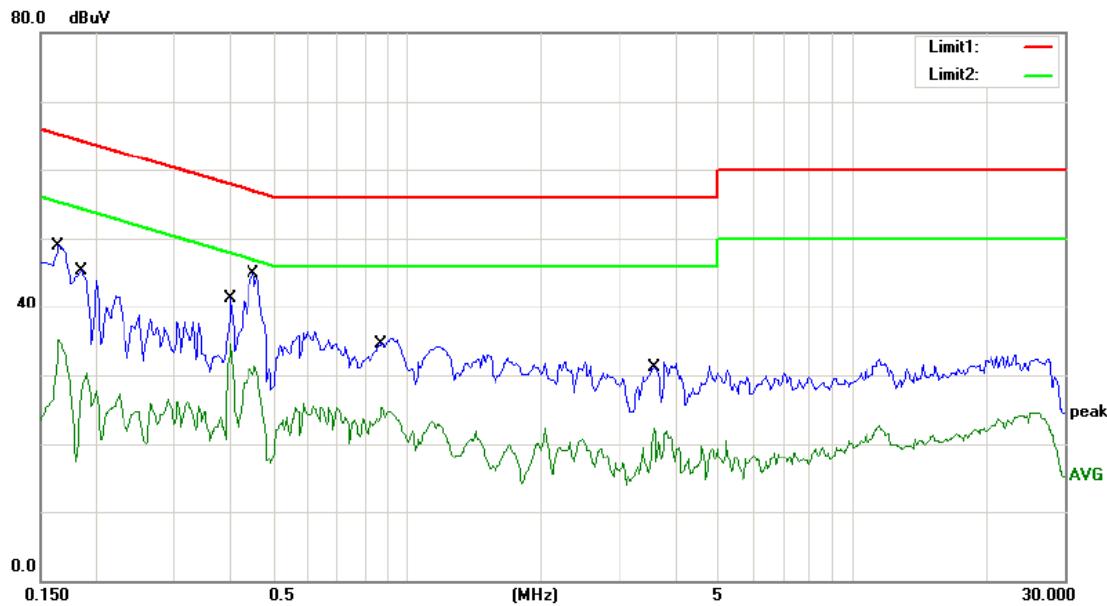

Site Conduction #2

Phase: **L1**

Temperature: 26

Limit: (CE)FCC PART 15 C

Power: AC 120V/60Hz


Humidity: 55 %

Mode: Bluetooth ON

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1650	48.99	0.00	48.99	65.21	-16.22	QP	
2		0.1650	35.14	0.00	35.14	55.21	-20.07	AVG	
3		0.1850	45.37	0.00	45.37	64.26	-18.89	QP	
4		0.1850	30.36	0.00	30.36	54.26	-23.90	AVG	
5		0.4000	41.22	0.00	41.22	57.85	-16.63	QP	
6		0.4000	34.59	0.00	34.59	47.85	-13.26	AVG	
7	*	0.4500	44.95	0.00	44.95	56.88	-11.93	QP	
8		0.4500	31.29	0.00	31.29	46.88	-15.59	AVG	
9		0.8800	35.28	0.00	35.28	56.00	-20.72	QP	
10		0.8800	25.30	0.00	25.30	46.00	-20.70	AVG	
11		3.6000	31.87	0.00	31.87	56.00	-24.13	QP	
12		3.6000	22.25	0.00	22.25	46.00	-23.75	AVG	

\*:Maximum data    x:Over limit    !:over margin    Comment: Factor build in receiver.    Operator: HJ

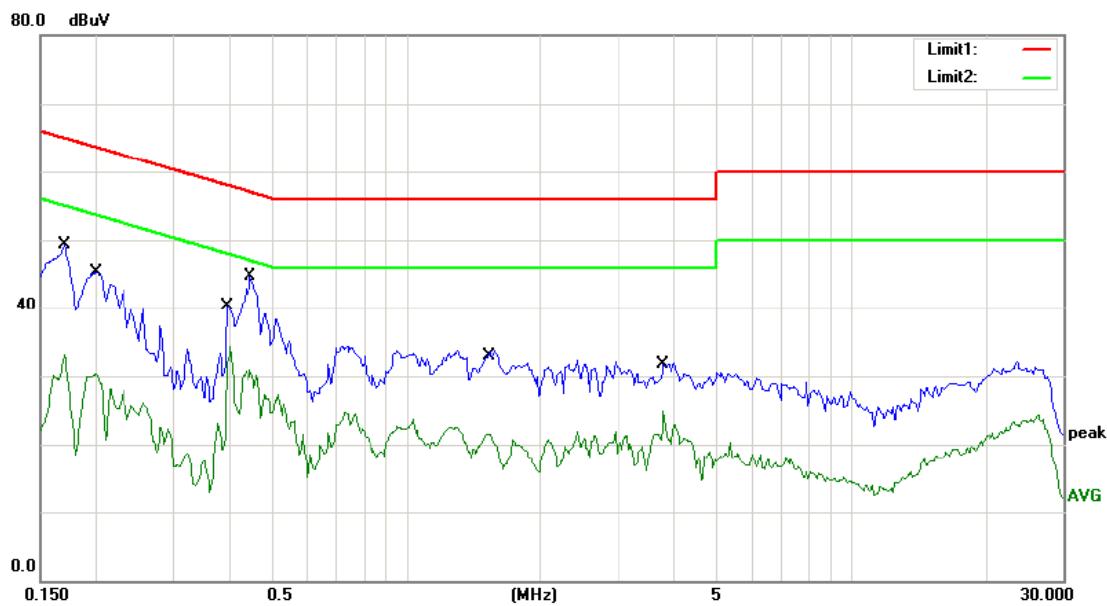

Site Conduction #2

Phase: **N**

Temperature: 26

Limit: (CE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 55 %

Mode: Bluetooth ON

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1700	49.21	0.00	49.21	64.96	-15.75	QP	
2		0.1700	33.11	0.00	33.11	54.96	-21.85	AVG	
3		0.2000	45.29	0.00	45.29	63.61	-18.32	QP	
4		0.2000	30.31	0.00	30.31	53.61	-23.30	AVG	
5		0.3950	40.29	0.00	40.29	57.96	-17.67	QP	
6		0.3950	34.39	0.00	34.39	47.96	-13.57	AVG	
7	*	0.4450	44.69	0.00	44.69	56.97	-12.28	QP	
8		0.4450	30.99	0.00	30.99	46.97	-15.98	AVG	
9		1.5100	33.79	0.00	33.79	56.00	-22.21	QP	
10		1.5100	21.59	0.00	21.59	46.00	-24.41	AVG	
11		3.7900	31.99	0.00	31.99	56.00	-24.01	QP	
12		3.7900	24.80	0.00	24.80	46.00	-21.20	AVG	

\*:Maximum data    x:Over limit    !:over margin    Comment: Factor build in receiver.    Operator: HJ

## 8.9 ANTENNA APPLICATION

### 8.9.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 8.9.2 Result

The EUT'S antenna is Integral Antenna. The antenna's gain is -1.72dBi and meets the requirement.