



TM 3 & ANT 2 & Highest



Reference

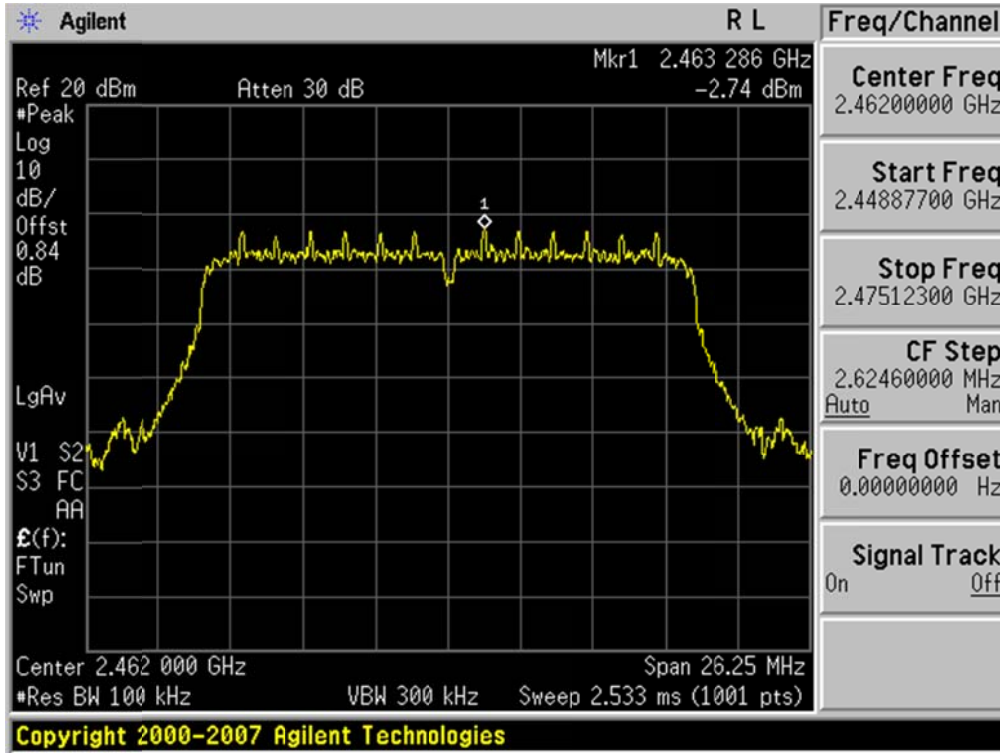


High Band-edge

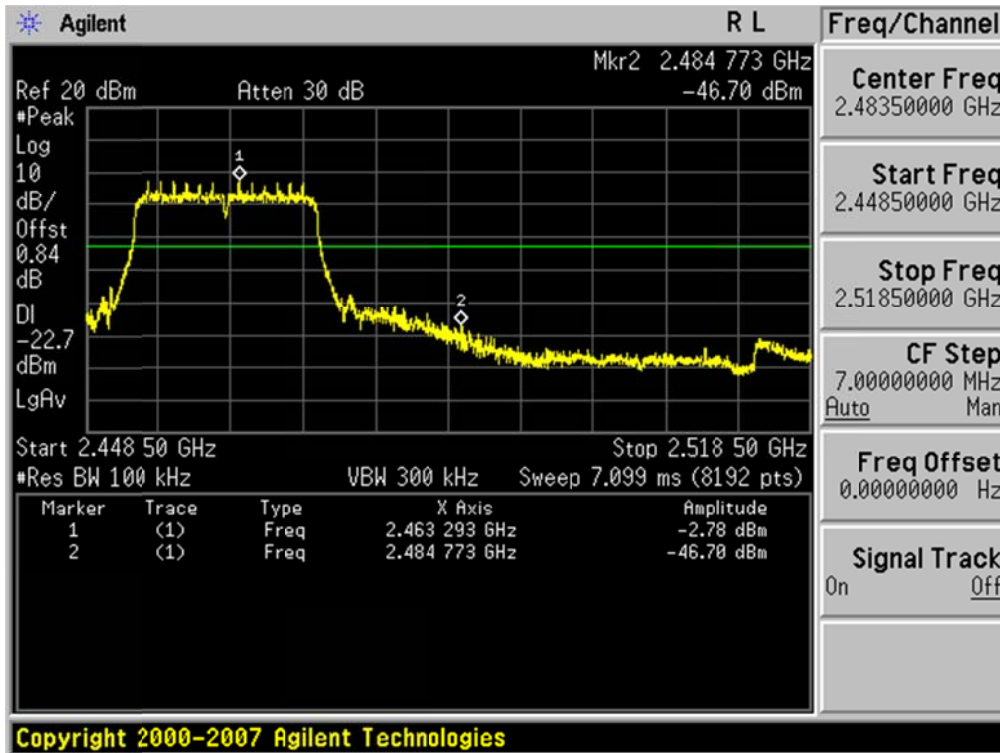

Conducted Spurious Emissions

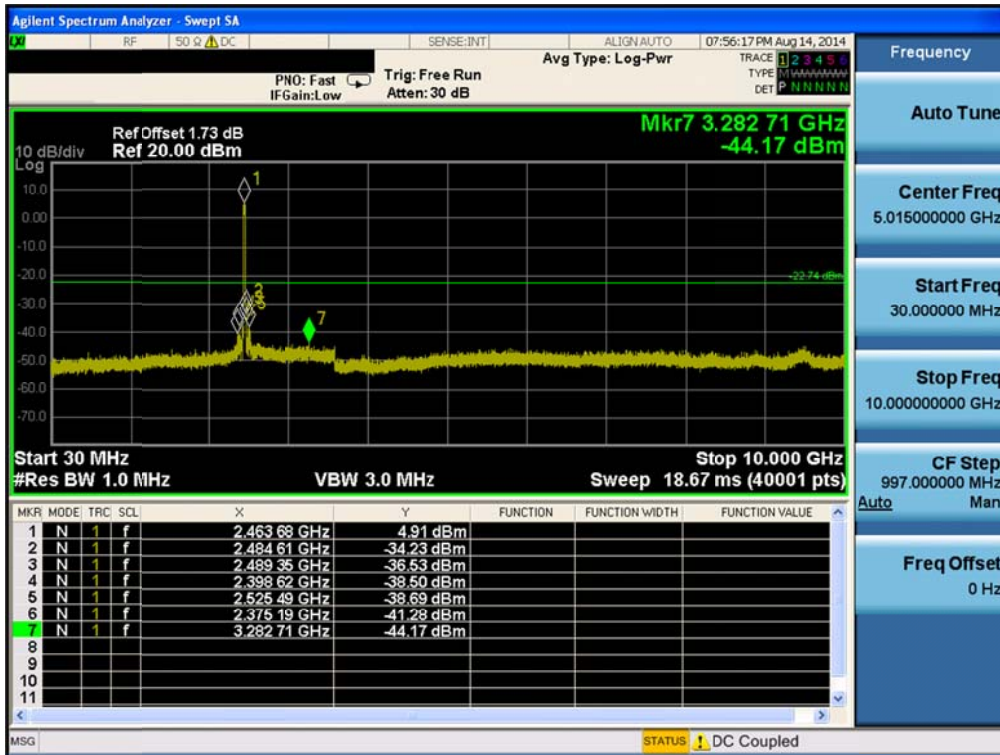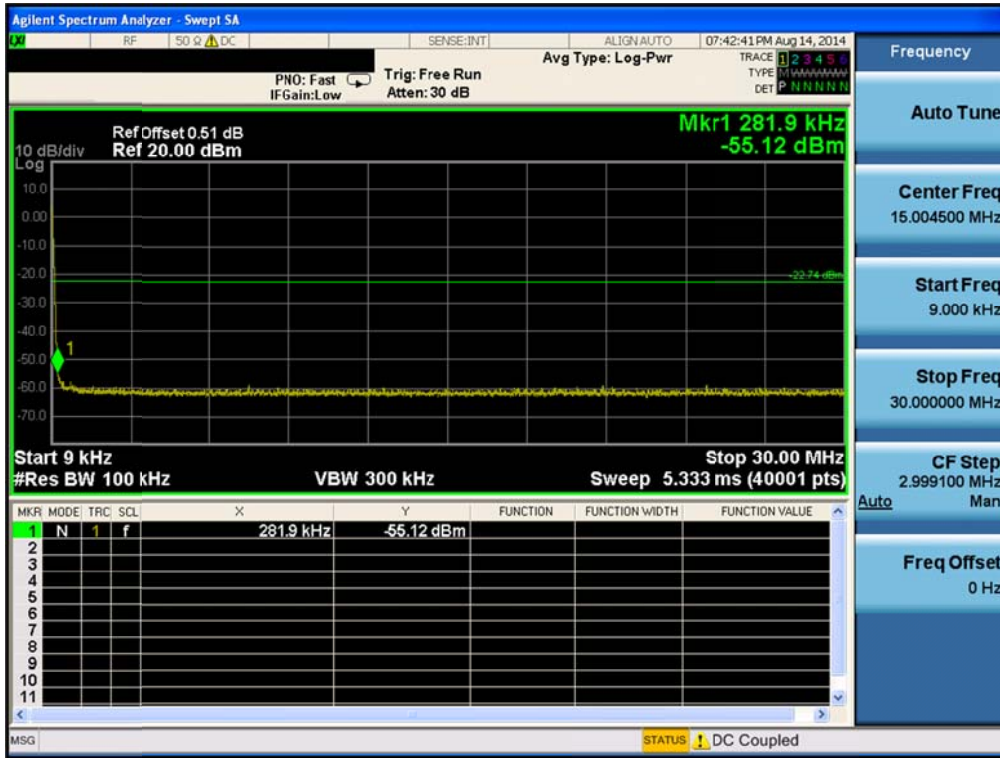


Conducted Spurious Emissions

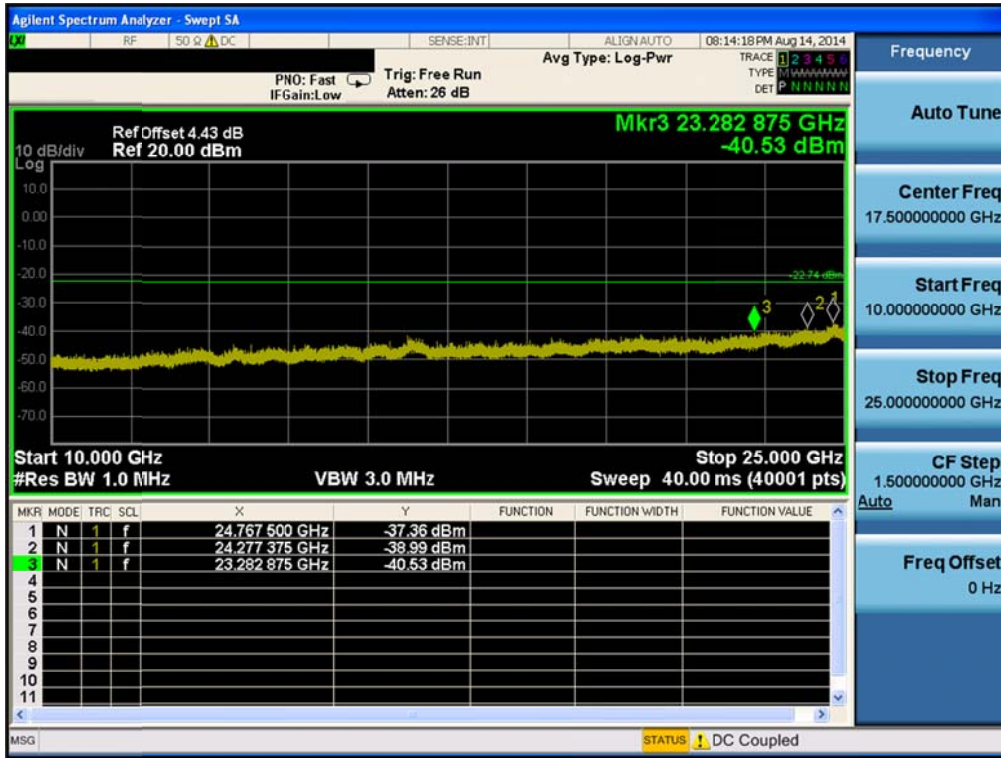


TM 4 & ANT 1 & Lowest



Reference

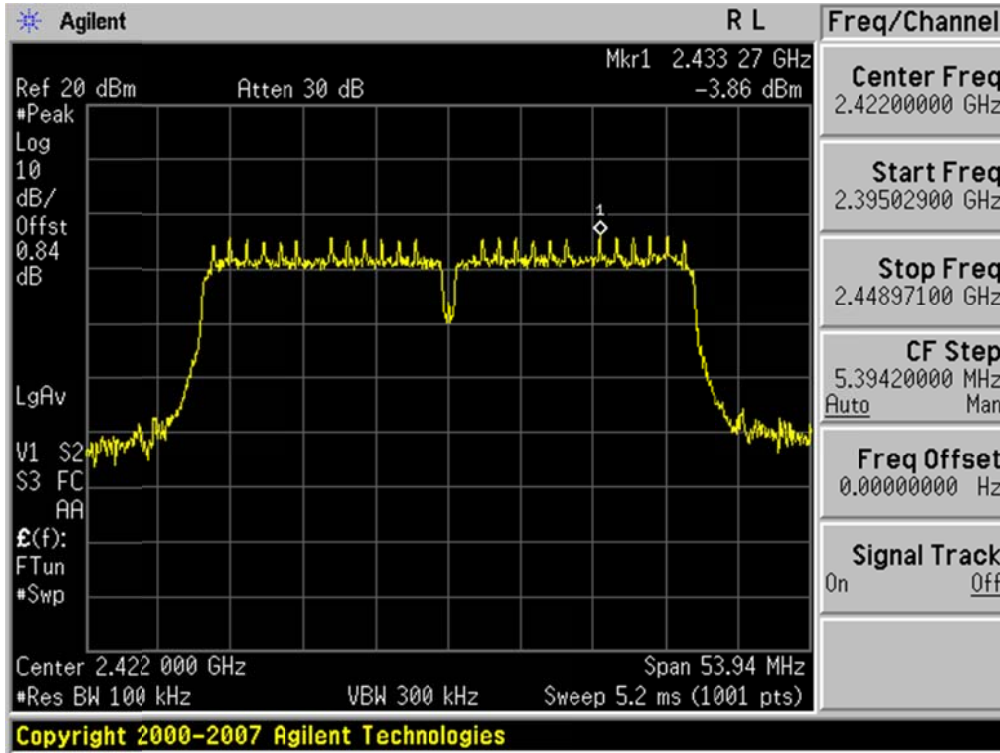


Low Band-edge

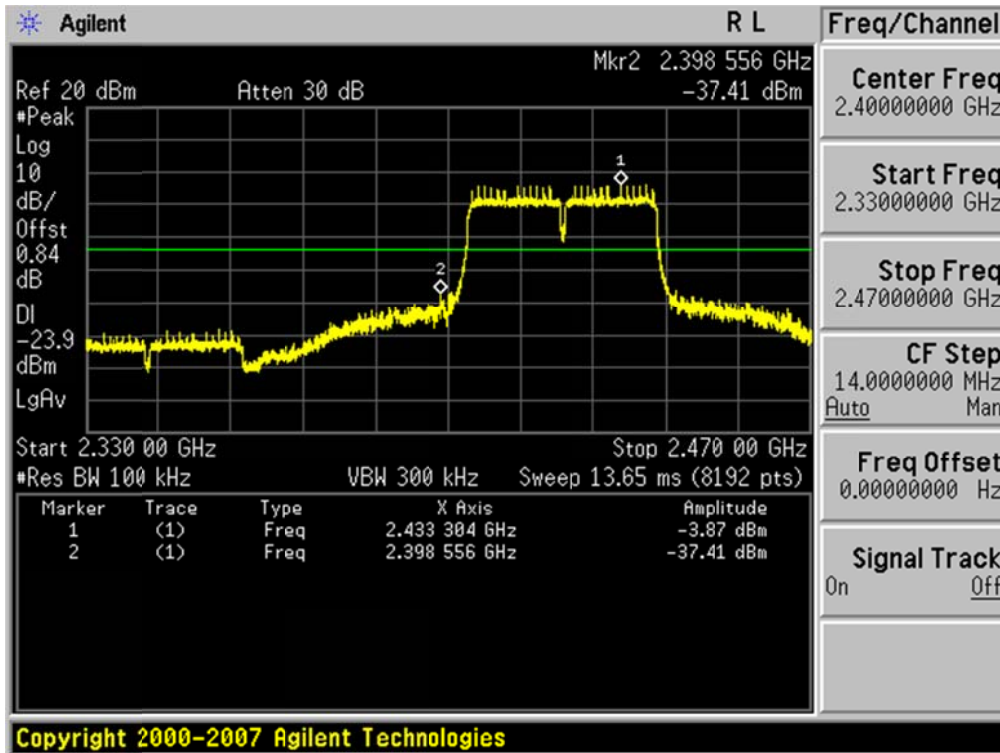

Conducted Spurious Emissions

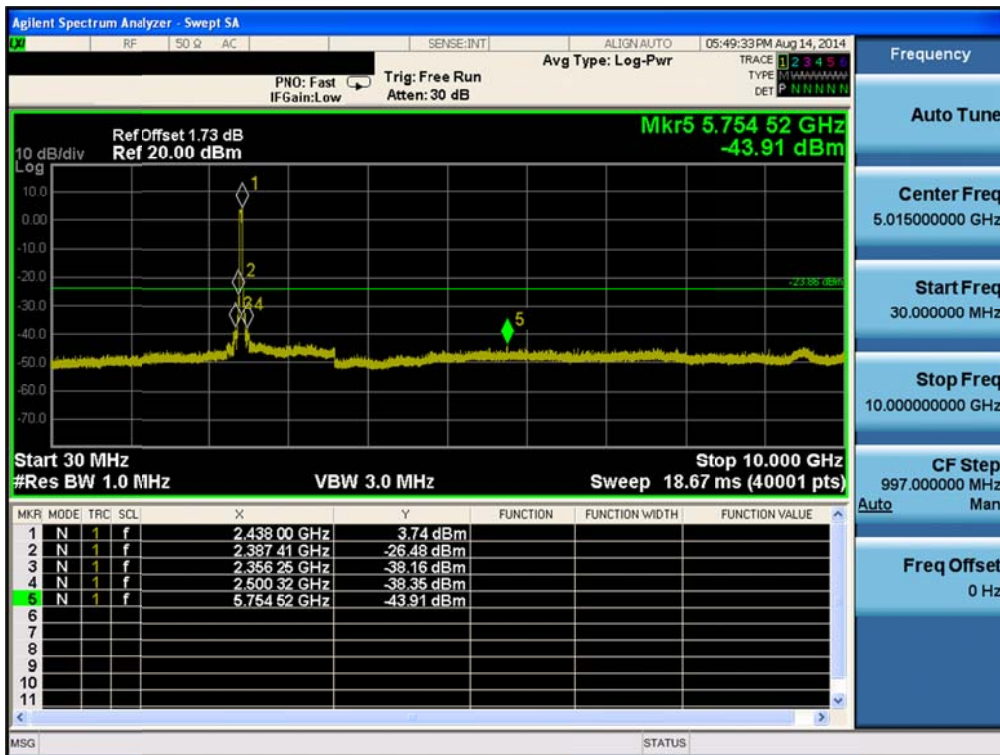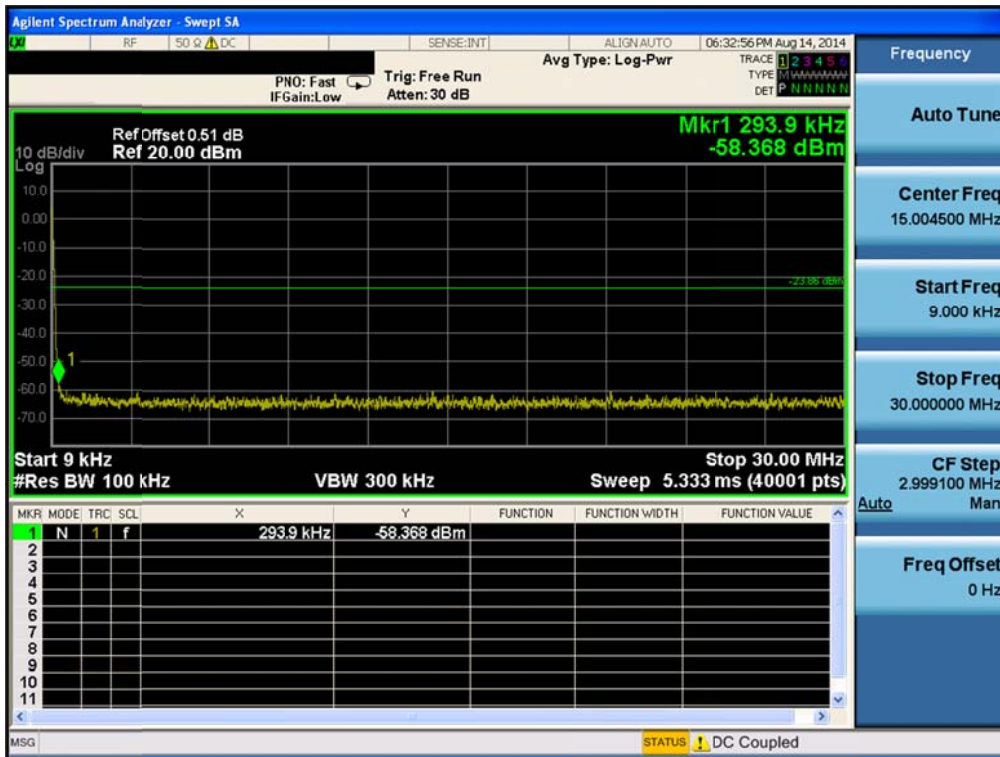


Conducted Spurious Emissions

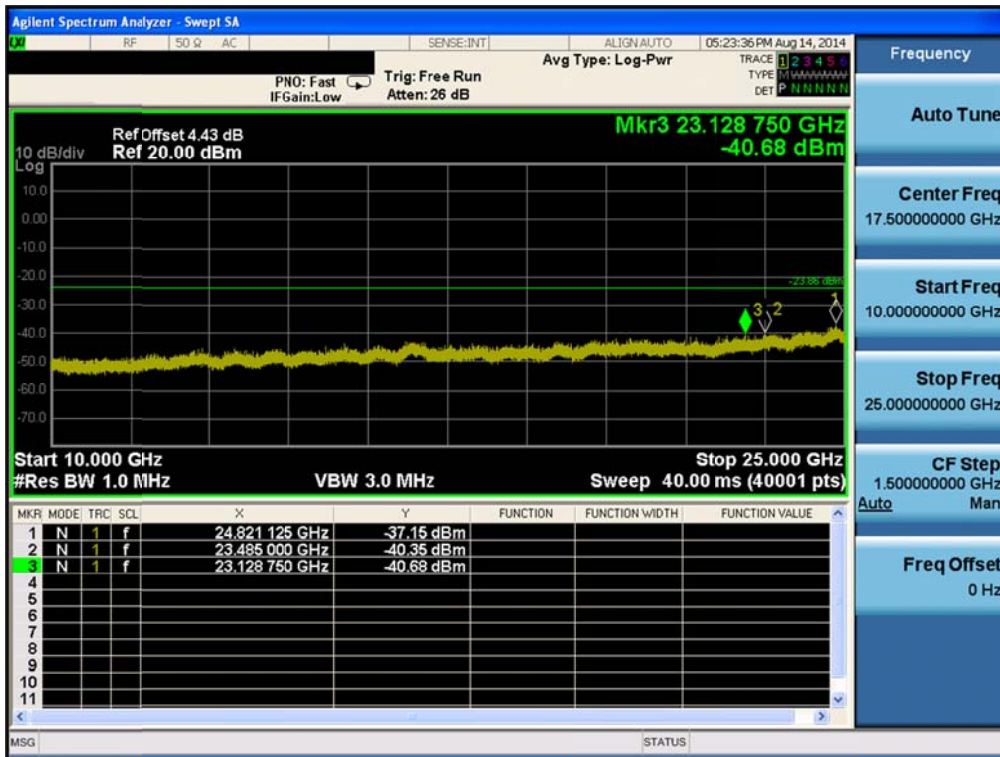


TM 4 & ANT 1 & Middle



Reference

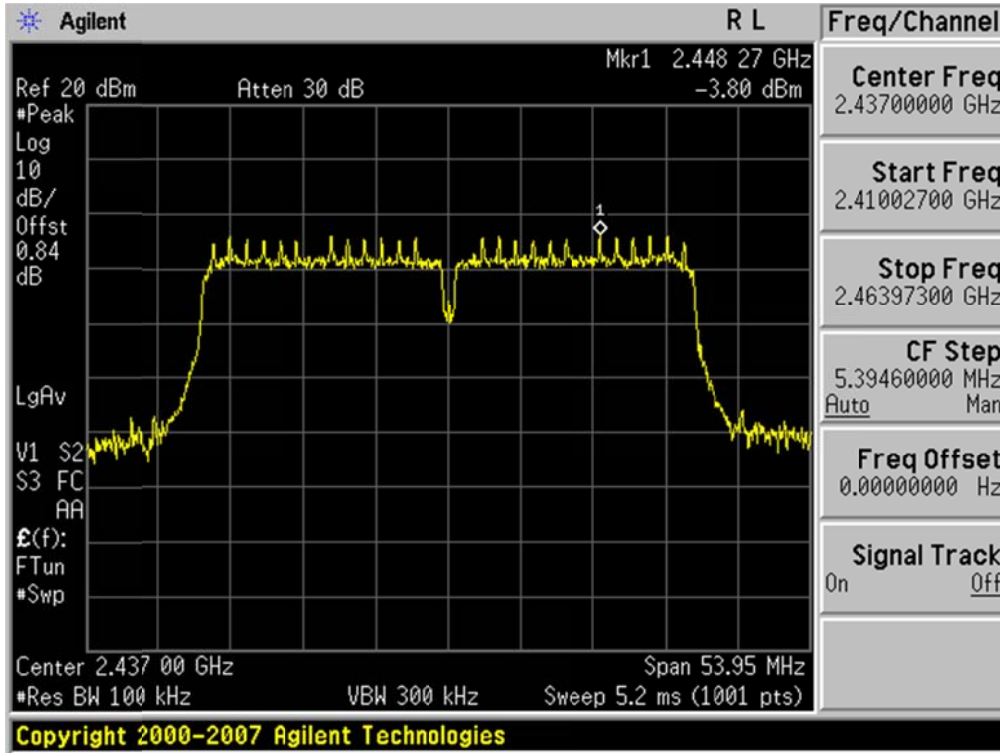

Conducted Spurious Emissions

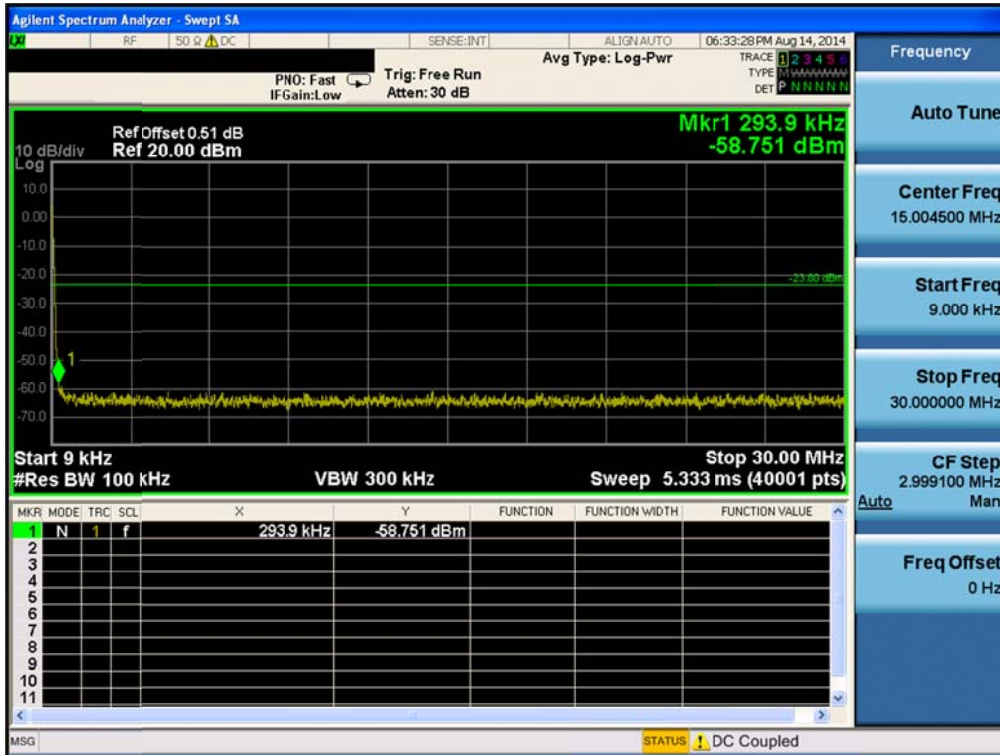


Conducted Spurious Emissions

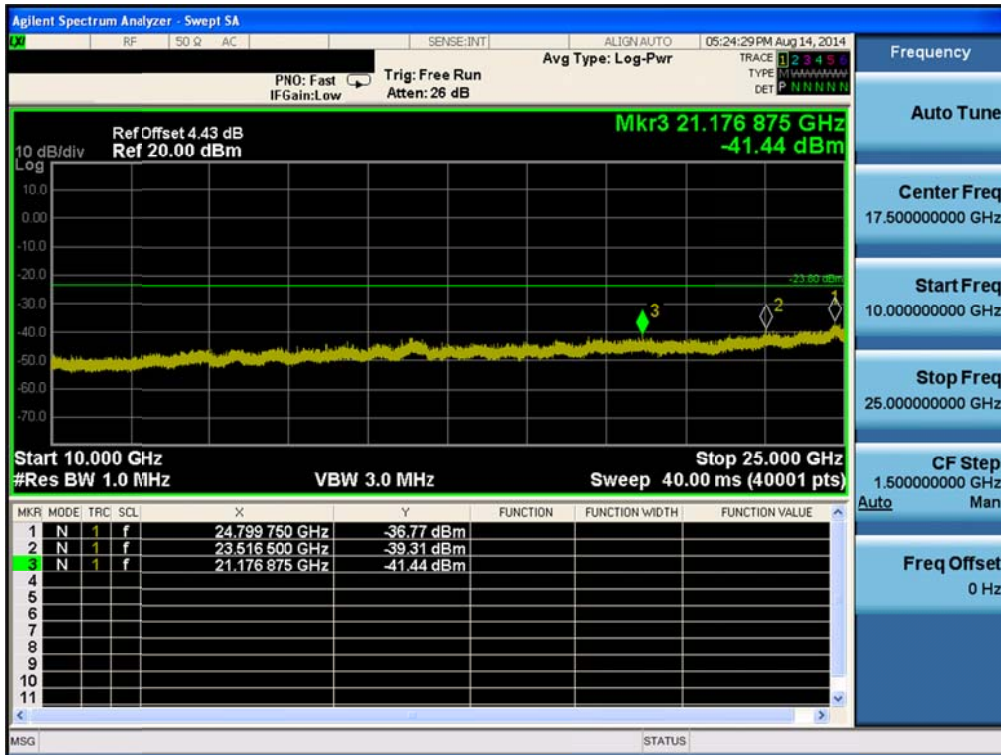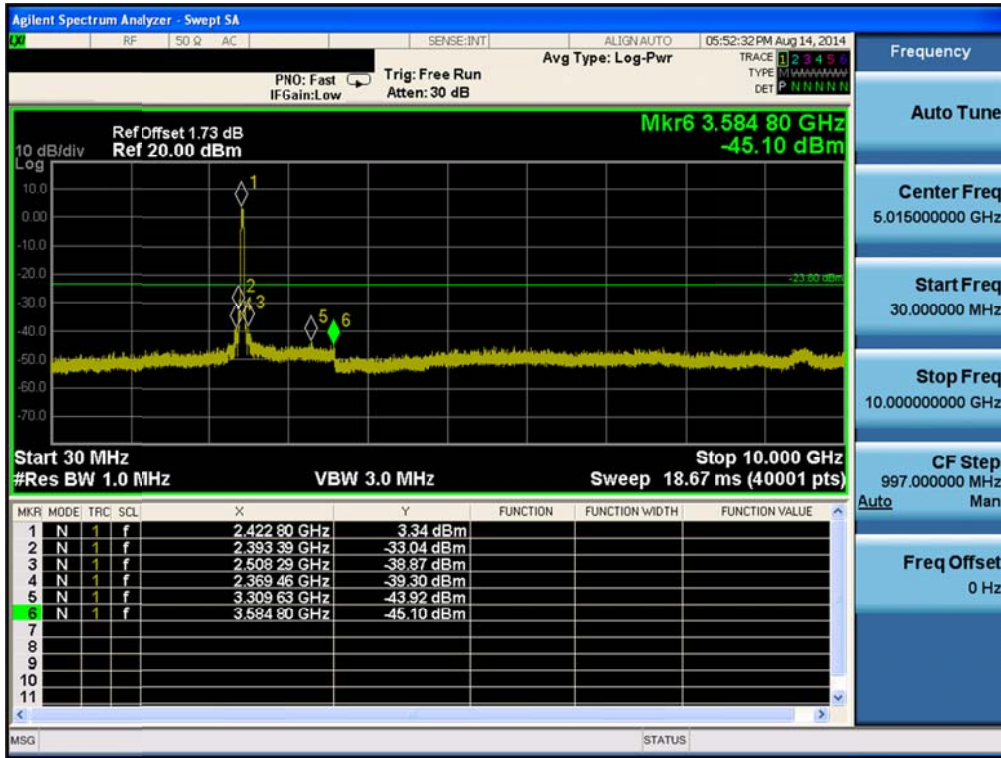


TM 4 & ANT 1 & Highest



Reference

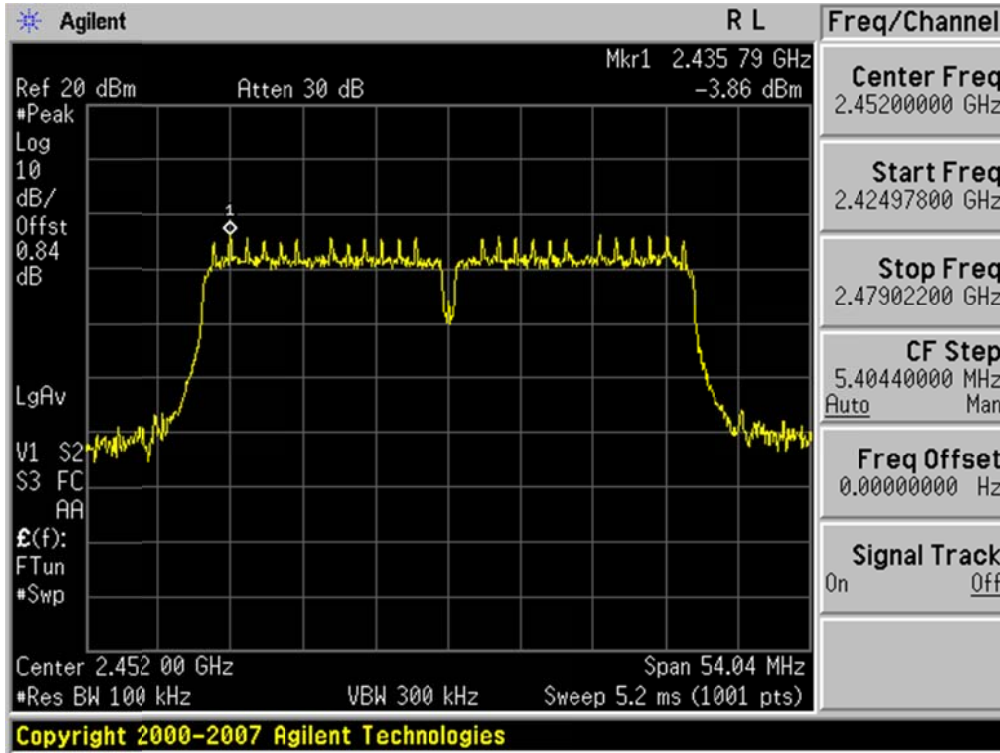


High Band-edge

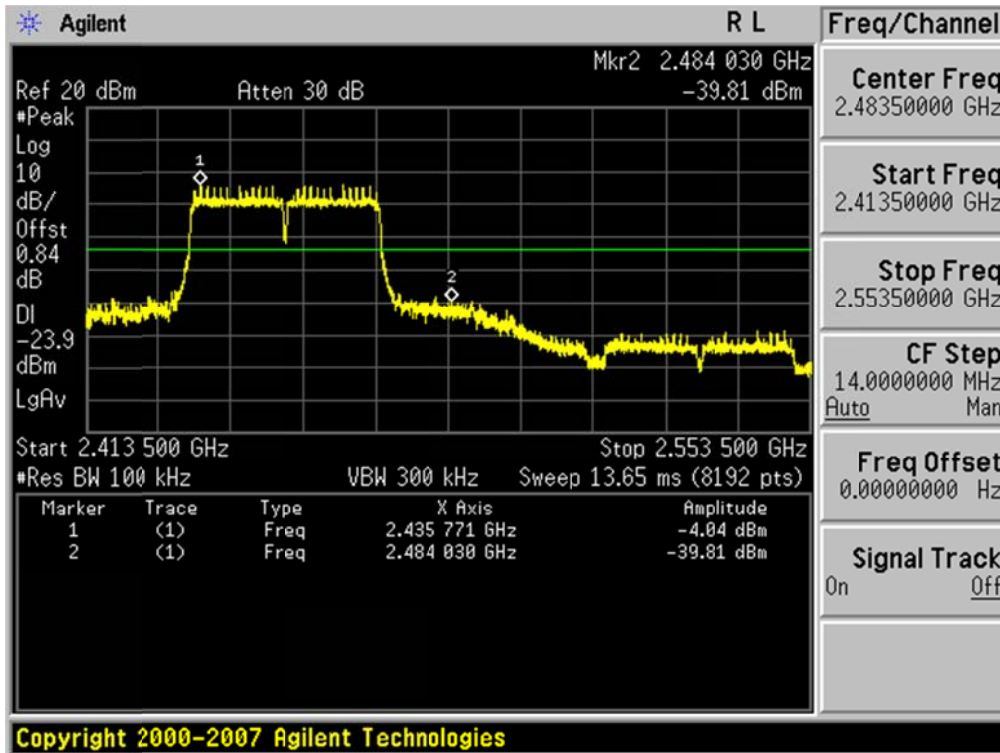

Conducted Spurious Emissions

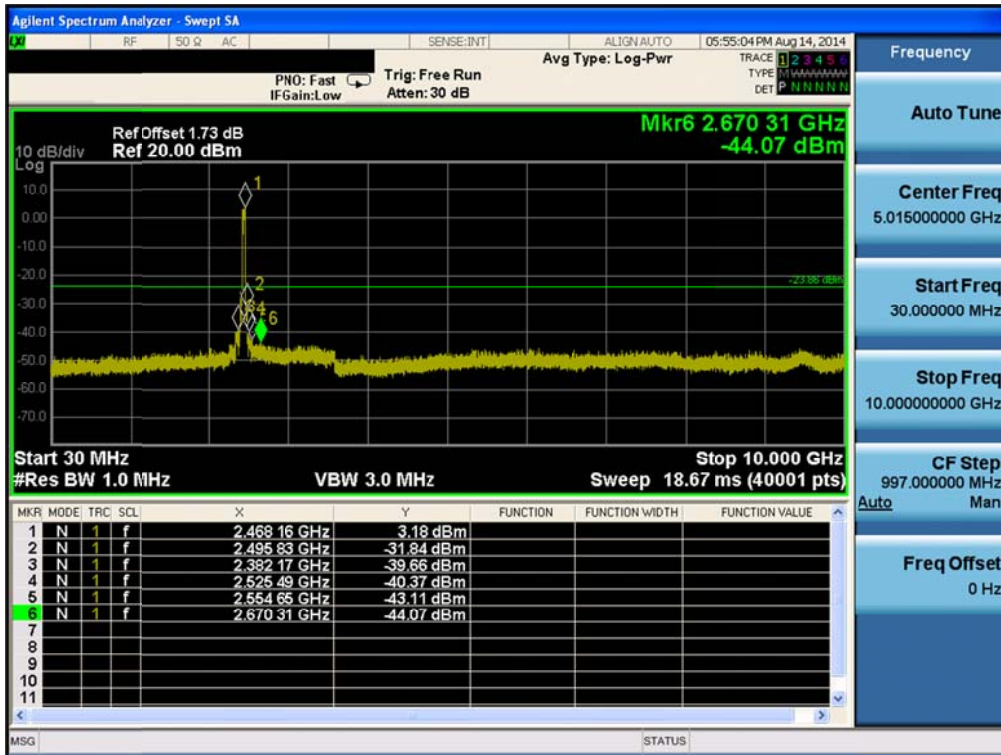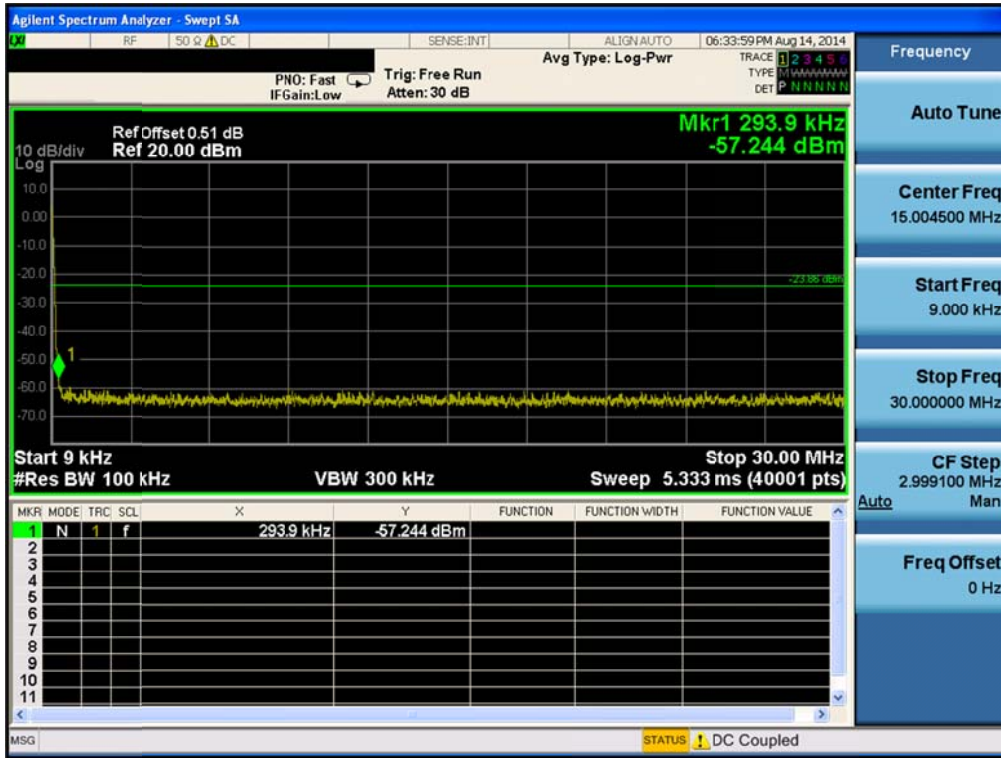


Conducted Spurious Emissions

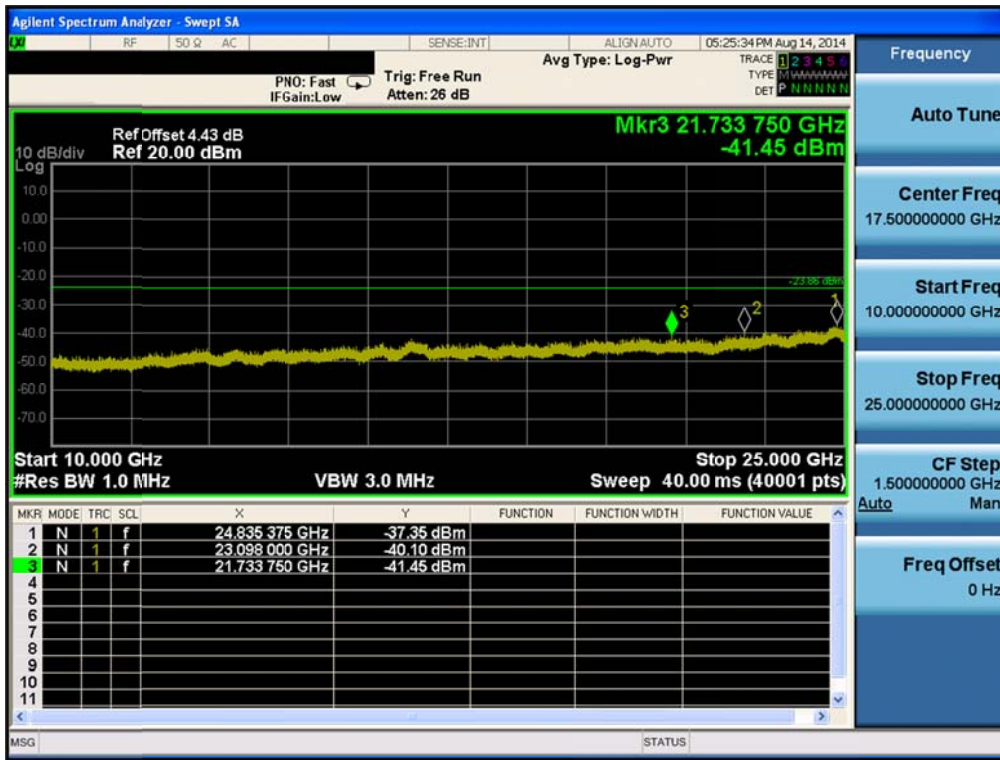


TM 4 & ANT 2 & Lowest



Reference

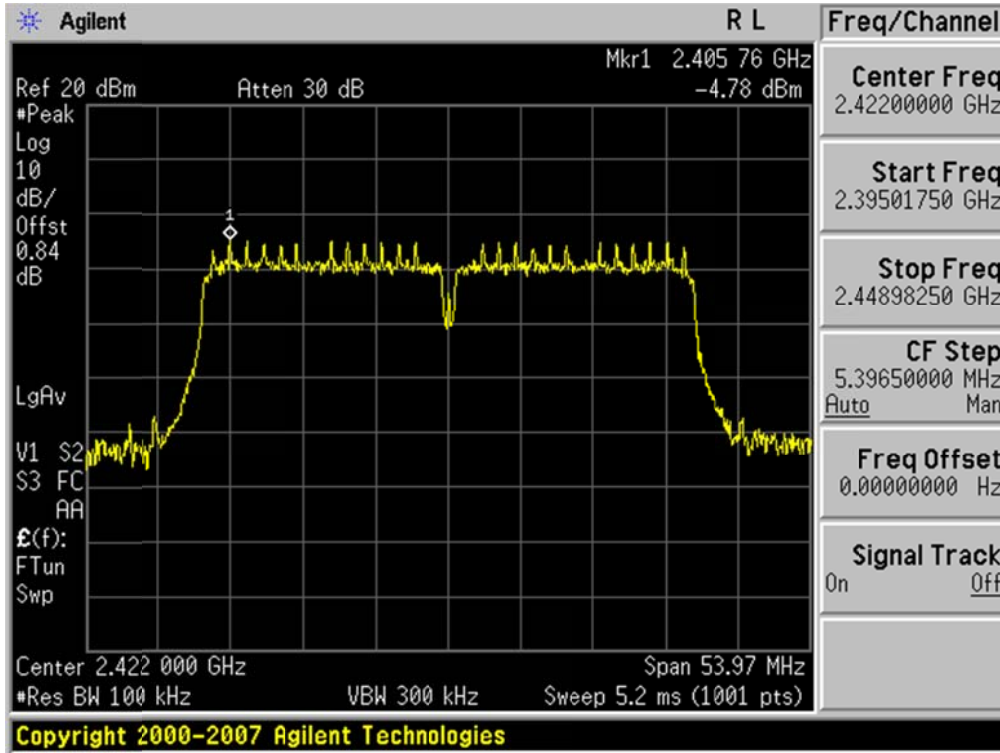


Low Band-edge

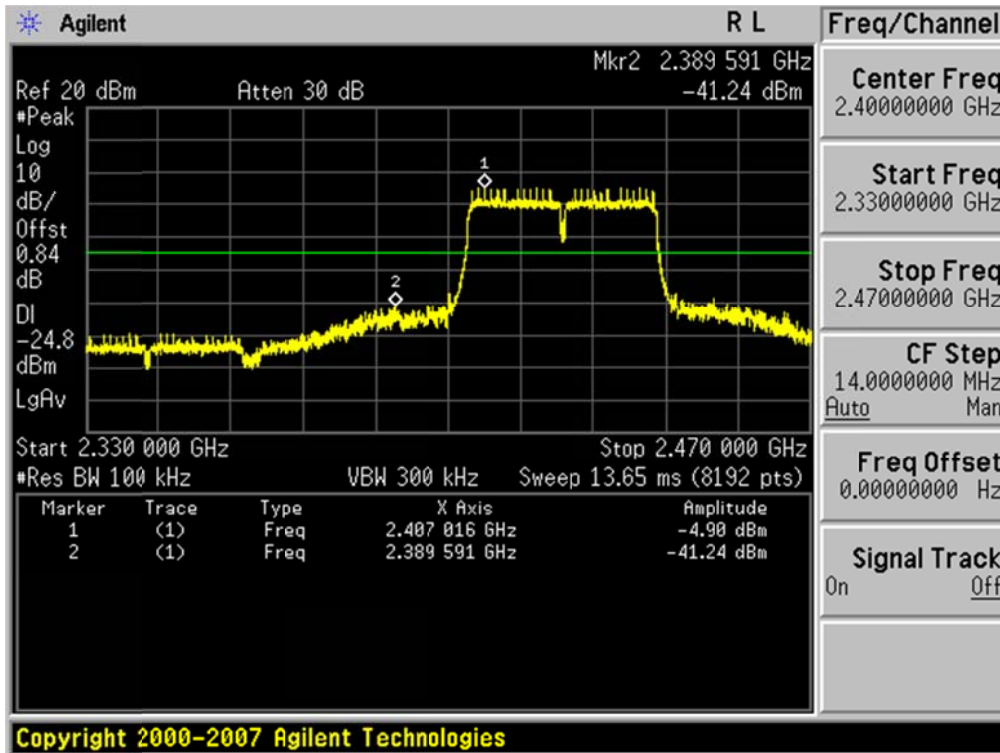

Conducted Spurious Emissions

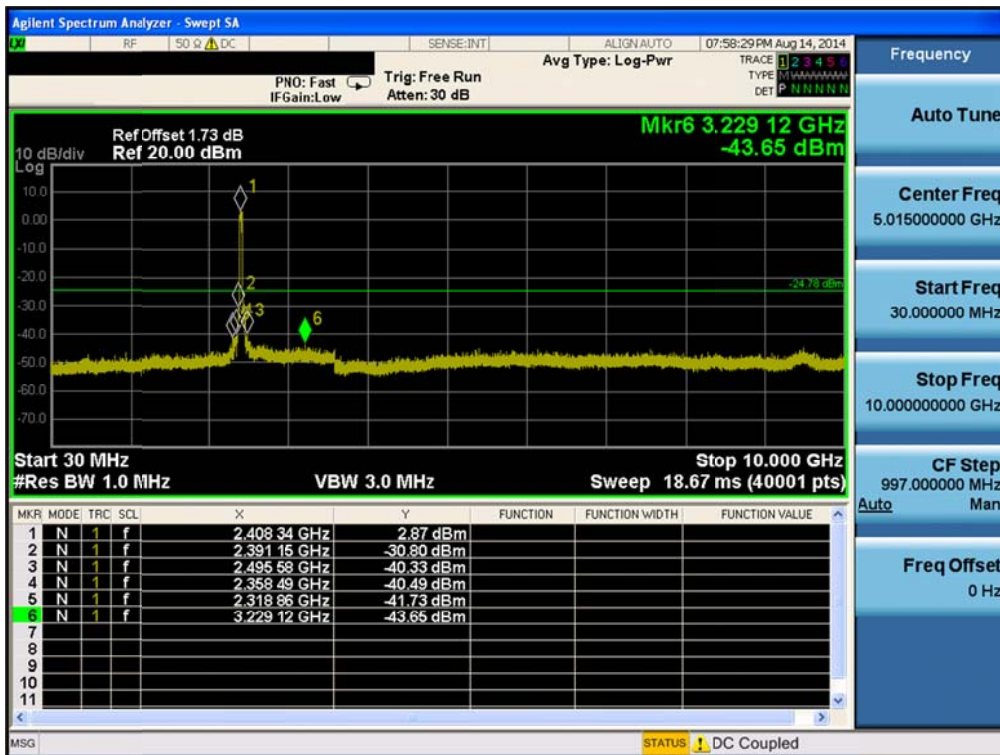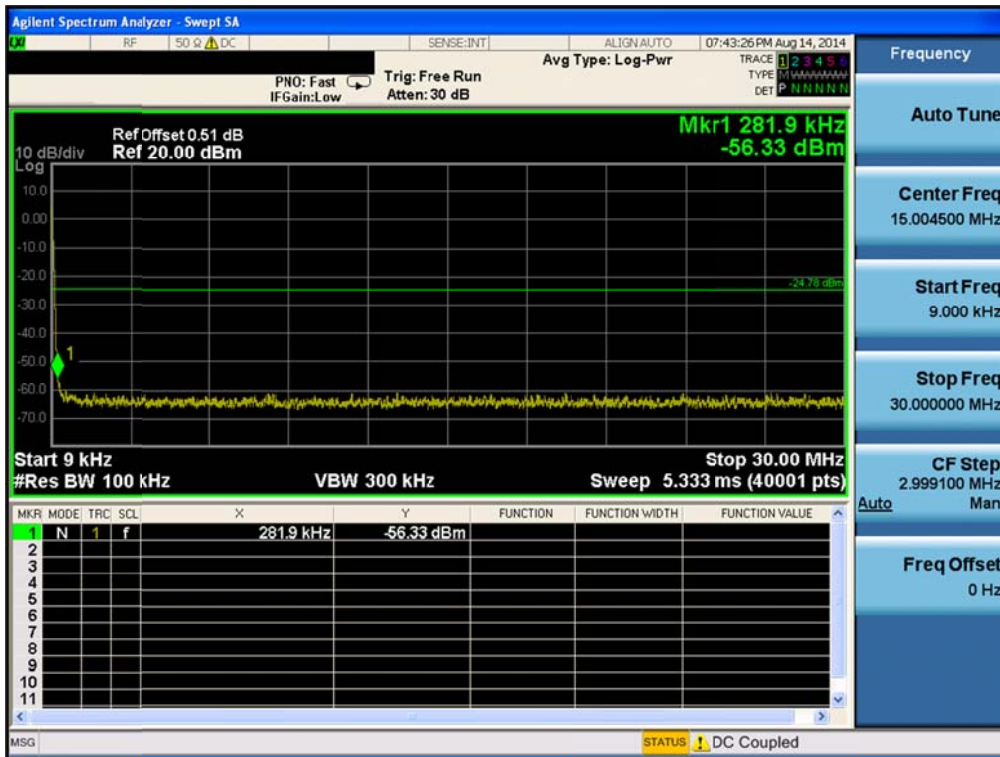


Conducted Spurious Emissions

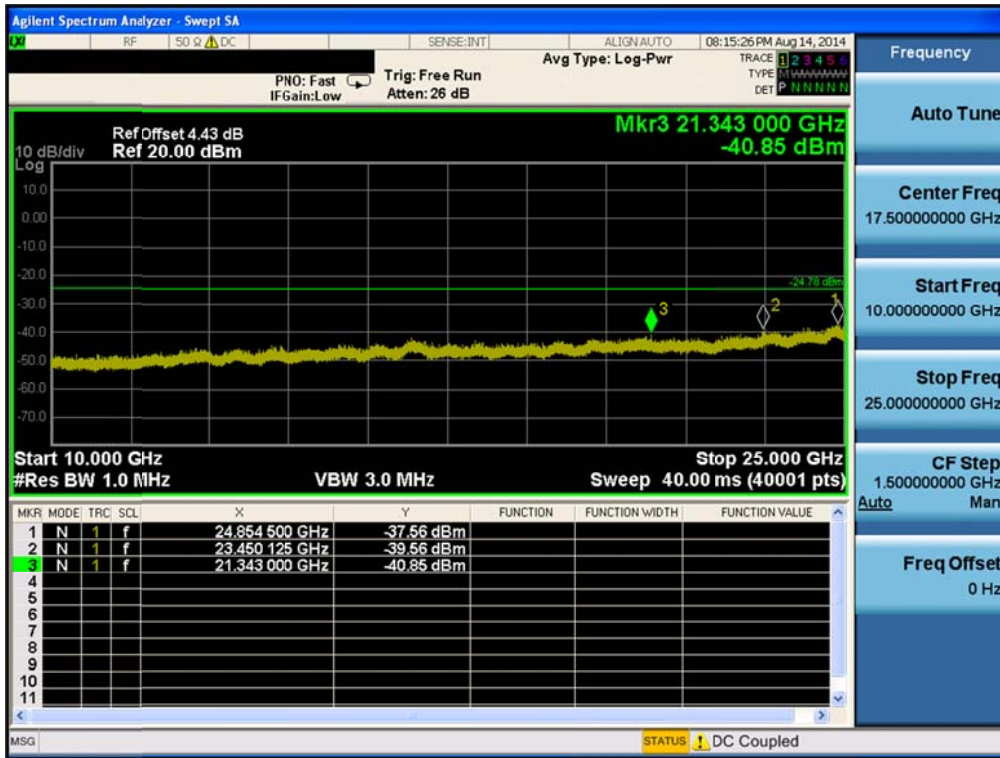


TM 4 & ANT 2 & Middle



Reference

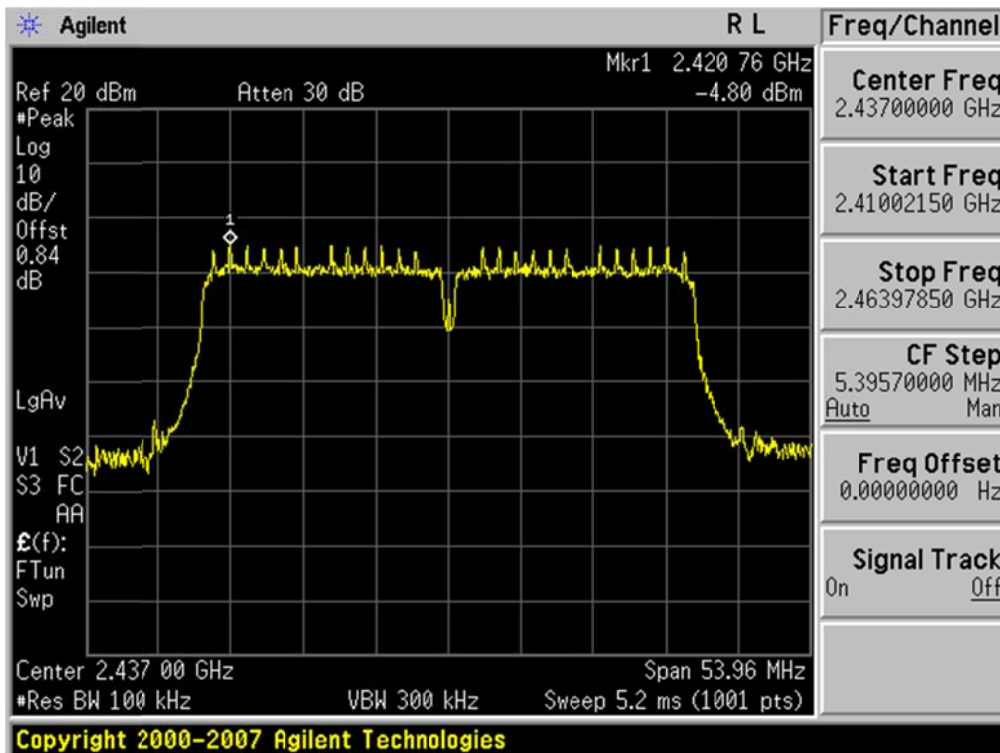

Conducted Spurious Emissions

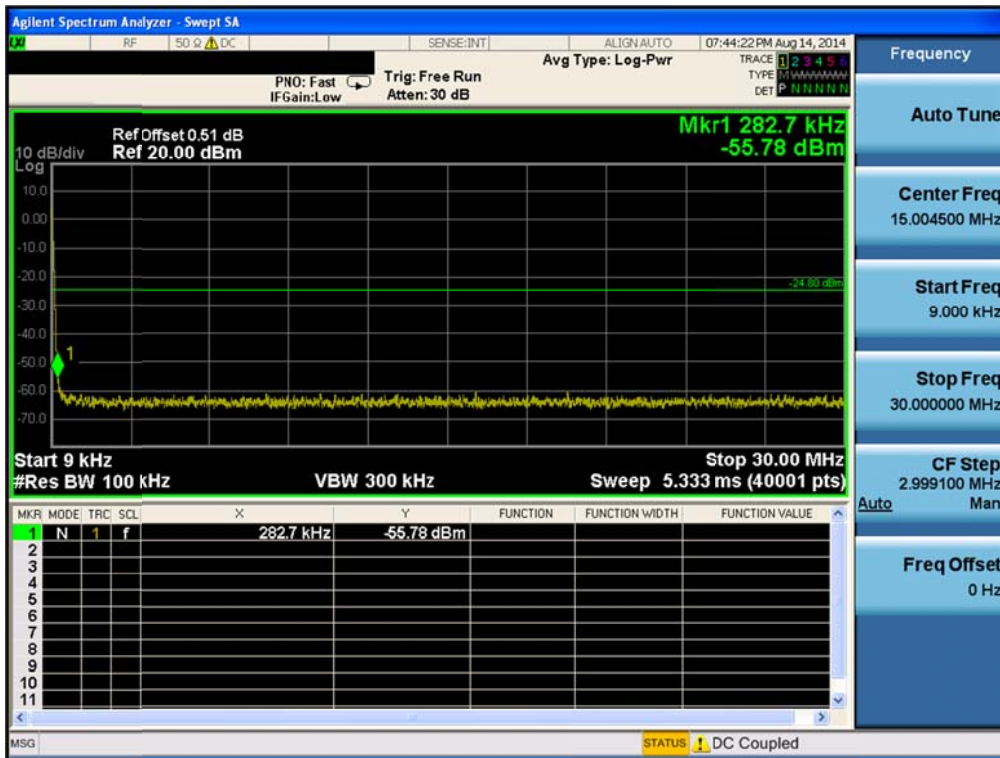


Conducted Spurious Emissions

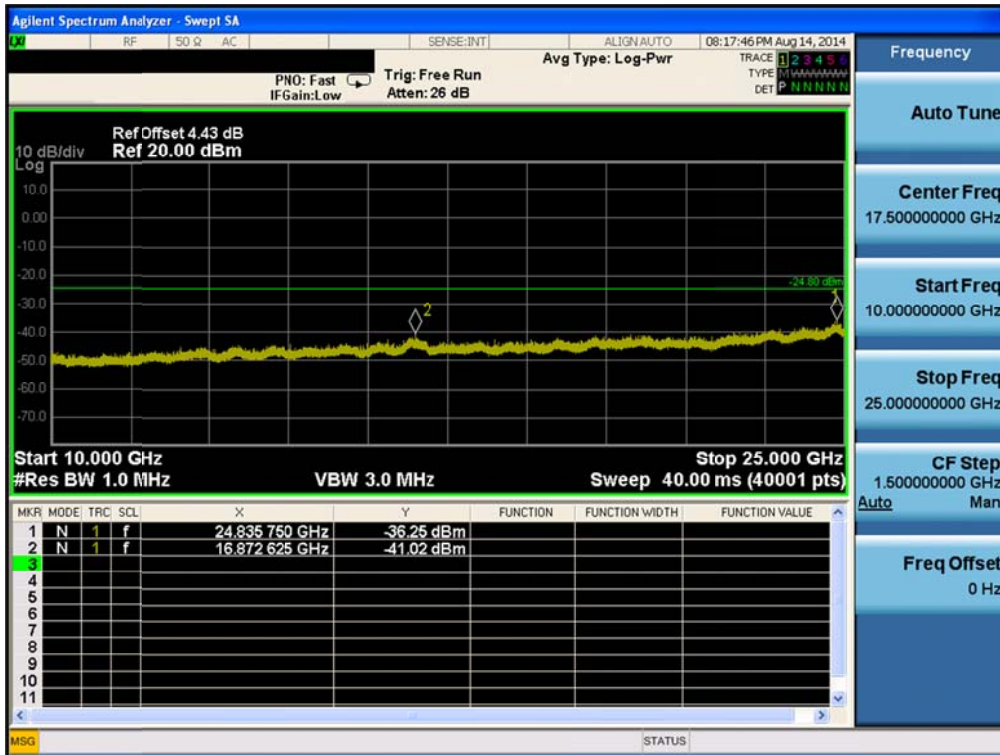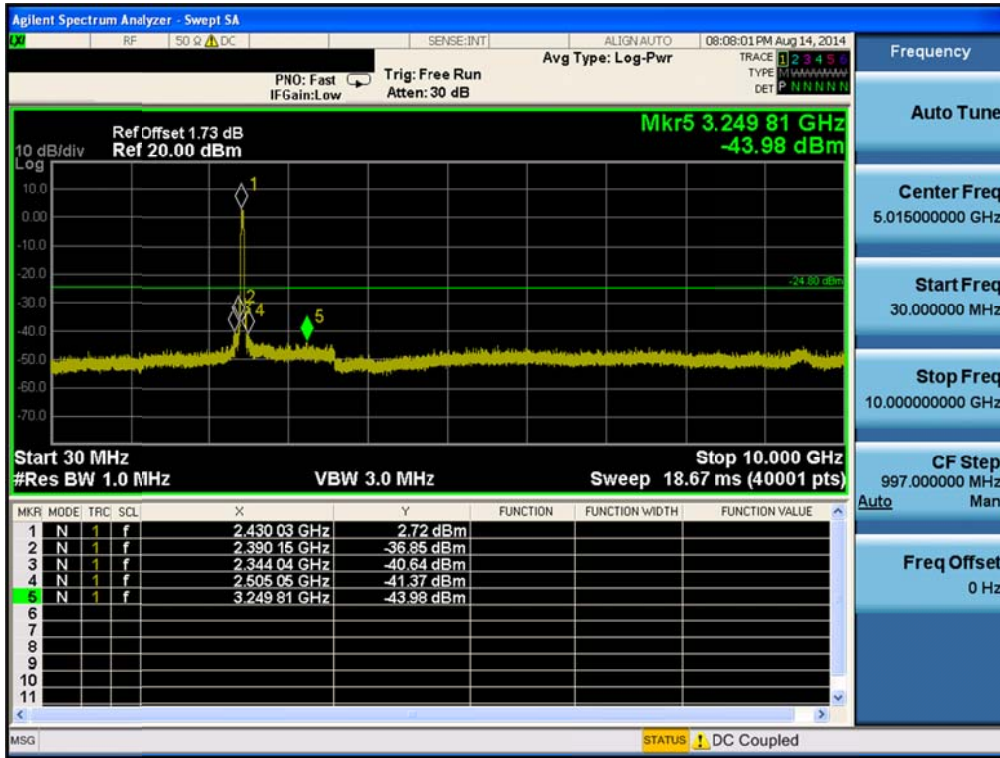


TM 4 & ANT 2 & Highest



Reference

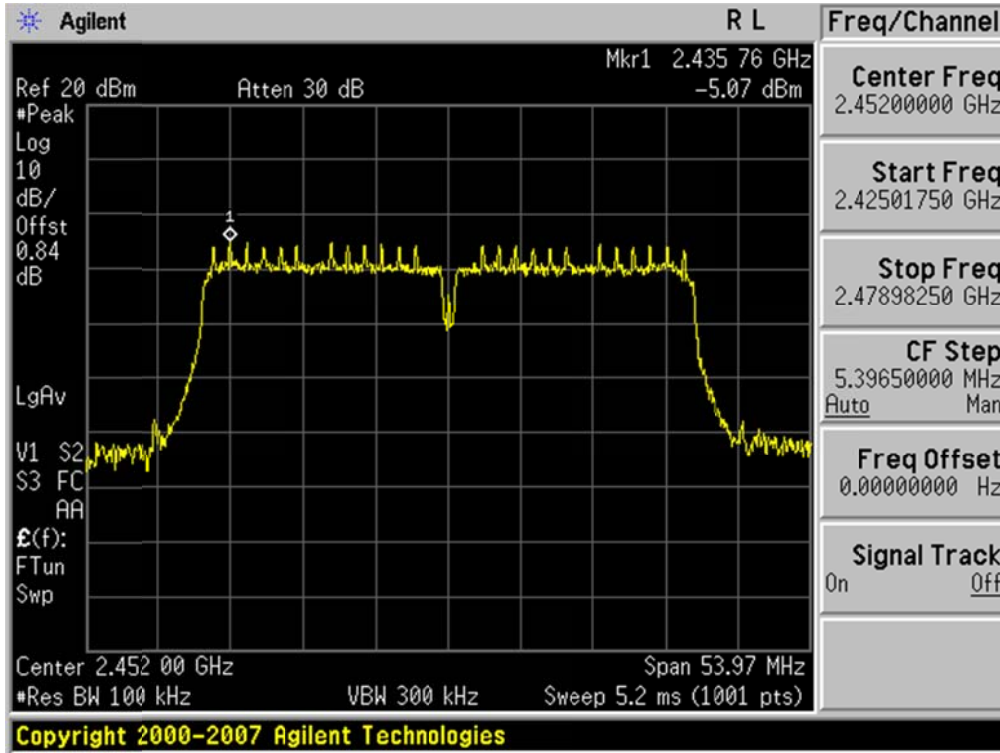


High Band-edge

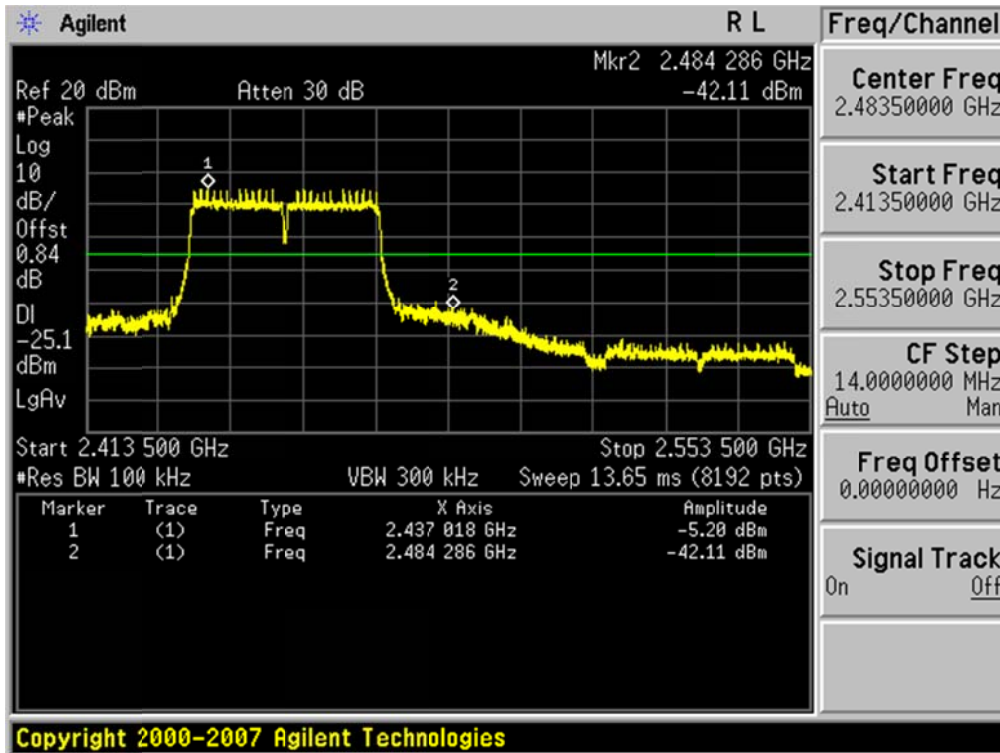

Conducted Spurious Emissions

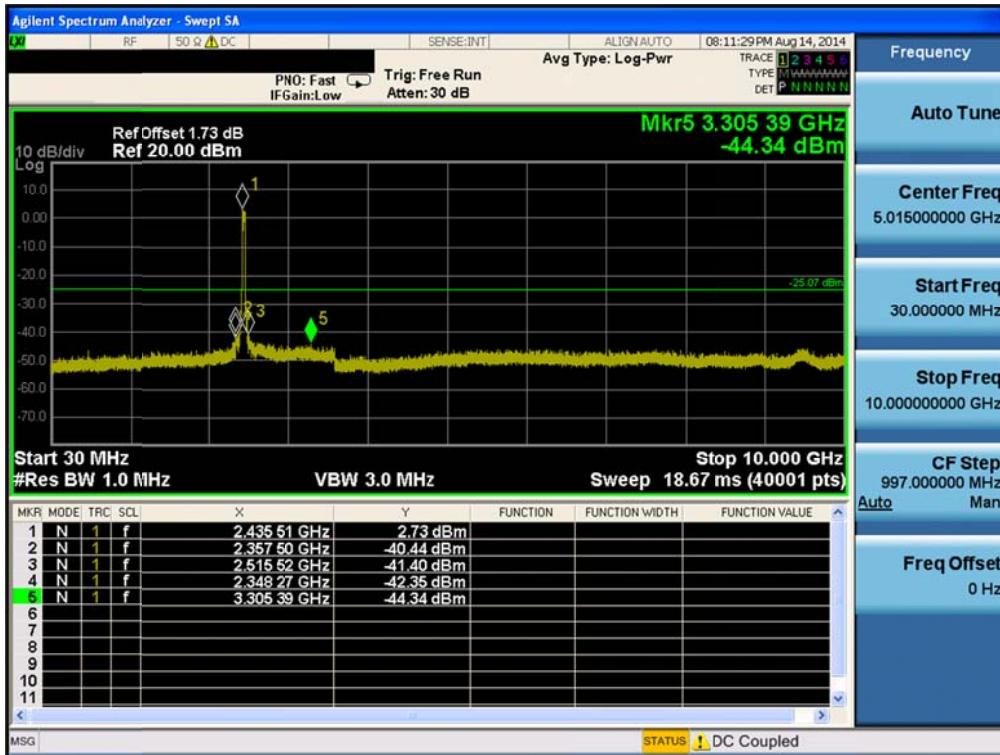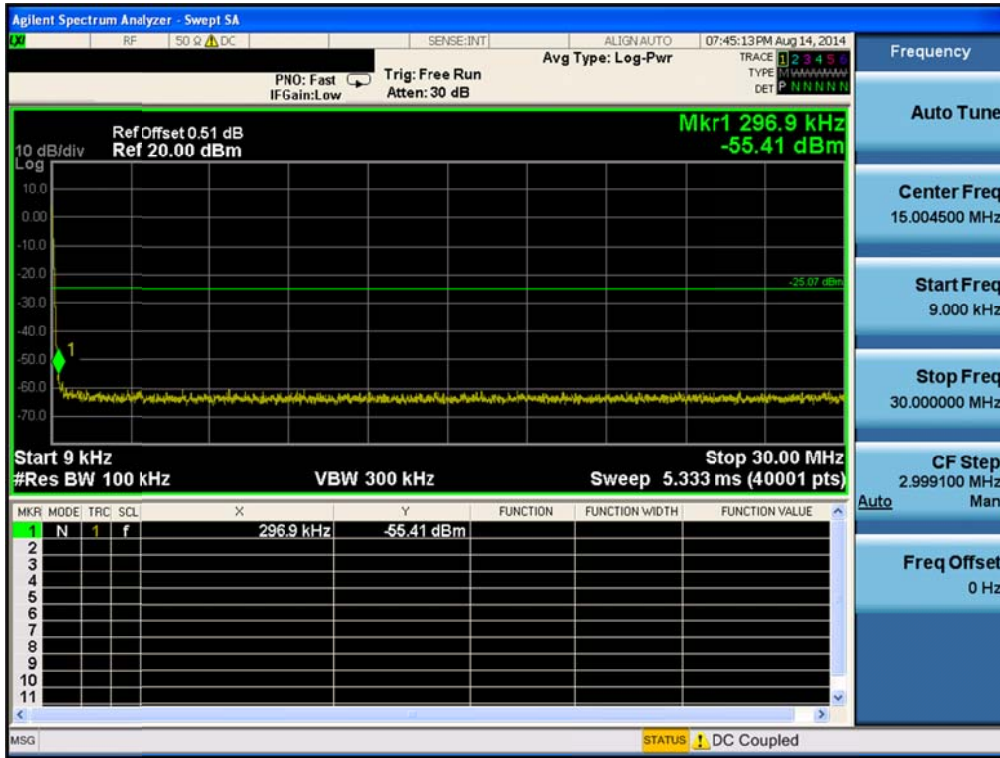

Conducted Spurious Emissions

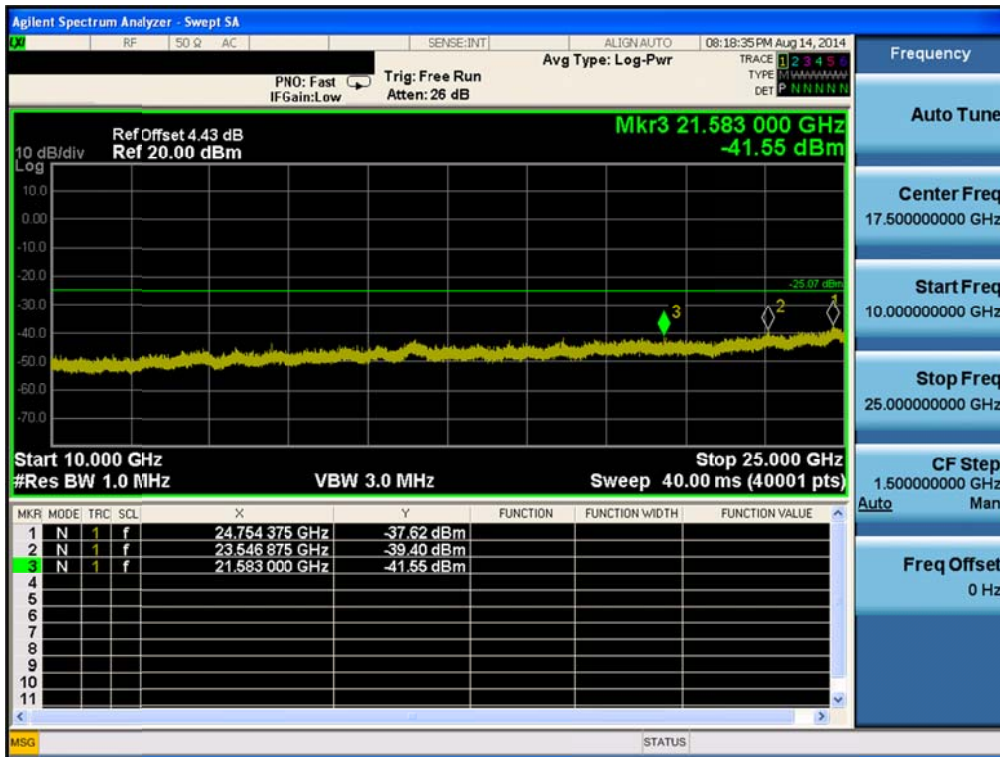

8.5 Radiated spurious emissions

Test Requirements and limit, §15.247(d), §15.205, §15.209 & RSS-210 [A8.5], RSS-Gen [7.2.2]

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) and (b), then the 15.209(a) limit in the table below has to be followed

▪ **FCC Part 15.209(a) and (b)**

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 – 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3


** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

▪ **FCC Part 15.205 (a):** Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.52025	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	12.57675 ~	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	12.57725	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	13.36 ~ 13.41	162.0125 ~ 167.17	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.42 ~ 16.423	167.72 ~ 173.2	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	16.69475 ~	240 ~ 285	2655 ~ 2900		
8.291 ~ 8.294	16.69525	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	16.80425 ~	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	16.80475	608 ~ 614	3345.8 ~ 3358		
	25.5 ~ 25.67	960 ~ 1240	3600 ~ 4400		
	37.5 ~ 38.25				
	73 ~ 74.6				
	74.8 ~ 75.2				

▪ **FCC Part 15.205(b):** The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

Test Configuration

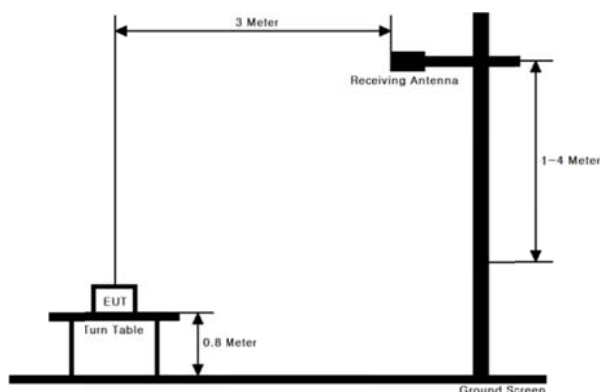

■ TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

■ Measurement Instrument Setting for Radiated Emission Measurements.

Peak Measurement: 12.2.4 of KDB 558074 v03r2

RBW = As specified in below table , VBW ≥ 3 x RBW, Sweep = Auto, Detector = Peak, Trace mode = Max Hold until the trace stabilizes.

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

Average Measurement: 12.2.5.2 of KDB 558074 v03r2

1. RBW = 1MHz(unless otherwise specified)
2. VBW ≥ 3 X RBW
3. Detector = RMS, if span / sweep point ≤ (RBW/2)
4. Averaging type = Power
5. Sweep time = auto
6. Trace average = At least 100 traces
7. A duty cycle correction factor($10\log(1/x)$, where x is the duty cycle) shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

Test Mode	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
TM 1	97.57	0.11
TM 2	87.46	0.59
TM 3	86.75	0.62
TM 4	76.33	1.18

Note: Please refer to Appendix I for detailed information.

Radiated Spurious Emissions data(9 kHz ~ 25 GHz) : Test Mode 1(TM 1)

Tested ANT	Tested Frequency	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
ANT 1	Lowest	2385.76	H	Z	PK	56.23	-0.07	-	-	56.16	74.00	17.84
		2385.61	H	Z	AV	44.37	-0.07	0.11	-	44.41	54.00	9.59
		4823.92	H	Z	PK	50.66	6.63	-	-	57.29	74.00	16.71
		4824.16	H	Z	AV	45.94	6.63	0.11	-	52.68	54.00	1.32
		-	-	-	-	-	-	-	-	-	-	-
	Middle	4874.08	H	Z	PK	50.51	6.80	-	-	57.31	74.00	16.69
		4873.96	H	Z	AV	45.44	6.80	0.11	-	52.35	54.00	1.65
		-	-	-	-	-	-	-	-	-	-	-
	Highest	2498.32	H	Z	PK	56.86	0.26	-	-	57.12	74.00	16.88
		2498.04	H	Z	AV	46.14	0.26	0.11	-	46.51	54.00	7.49
		4924.09	H	Z	PK	48.95	6.97	-	-	55.92	74.00	18.08
		4924.02	H	Z	AV	44.22	6.97	0.11	-	51.30	54.00	2.70
		-	-	-	-	-	-	-	-	-	-	-

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Sample Calculation.
 $Margin = Limit - Result$ / $Result = Reading + T.F + DCCF + DCF$ / $T.F = AF + CL - AG$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
3. Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.
 Therefore Distance Correction Factor(DCF) : $-9.54 \text{ dB} = 20 \cdot \log(1\text{m}/3\text{m})$

Radiated Spurious Emissions data(9 kHz ~ 25 GHz) : Test Mode 2(TM 2)

Tested ANT	Tested Frequency	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
ANT 1	Lowest	2389.91	H	Z	PK	66.65	-0.07	-	-	66.58	74.00	7.42
		2389.93	H	Z	AV	51.62	-0.07	0.59	-	52.14	54.00	1.86
		4824.44	H	Z	PK	47.09	6.63	-	-	53.72	74.00	20.28
		4824.32	H	Z	AV	36.30	6.63	0.59	-	43.52	54.00	10.48
		-	-	-	-	-	-	-	-	-	-	-
	Middle	4874.30	H	Z	PK	51.58	6.80	-	-	58.38	74.00	15.62
		4874.55	H	Z	AV	39.83	6.80	0.59	-	47.22	54.00	6.78
		-	-	-	-	-	-	-	-	-	-	-
	Highest	2483.60	H	Z	PK	66.92	0.26	-	-	67.18	74.00	6.82
		2483.61	H	Z	AV	51.64	0.26	0.59	-	52.49	54.00	1.51
		4923.45	H	Z	PK	50.66	6.97	-	-	57.63	74.00	16.37
		4923.82	H	Z	AV	38.96	6.97	0.59	-	46.52	54.00	7.48
		-	-	-	-	-	-	-	-	-	-	-

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Sample Calculation.
 $Margin = Limit - Result$ / $Result = Reading + T.F + DCCF + DCF$ / $T.F = AF + CL - AG$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
3. Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.
 Therefore Distance Correction Factor(DCF) : $-9.54 \text{ dB} = 20 \cdot \log(1\text{m}/3\text{m})$

Radiated Spurious Emissions data(9 kHz ~ 25 GHz) : Test Mode 3(TM 3)

Tested ANT	Tested Frequency	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
ANT 1 + ANT 2	Lowest	2389.33	H	Z	PK	70.94	-0.07	-	-	70.87	74.00	3.13
		2389.75	H	Z	AV	51.51	-0.07	0.62	-	52.06	54.00	1.94
		4824.25	H	Z	PK	48.36	6.63	-	-	54.99	74.00	19.01
		4824.45	H	Z	AV	36.58	6.63	0.62	-	43.83	54.00	10.17
		-	-	-	-	-	-	-	-	-	-	-
	Middle	4873.68	H	Z	PK	51.70	6.80	-	-	58.50	74.00	15.50
		4874.03	H	Z	AV	39.86	6.80	0.62	-	47.28	54.00	6.72
		-	-	-	-	-	-	-	-	-	-	-
	Highest	2483.57	H	Z	PK	67.36	0.26	-	-	67.62	74.00	6.38
		2483.86	H	Z	AV	51.47	0.26	0.62	-	52.35	54.00	1.65
		4923.27	H	Z	PK	52.75	6.97	-	-	59.72	74.00	14.28
		4923.76	H	Z	AV	39.66	6.97	0.62	-	47.25	54.00	6.75
		-	-	-	-	-	-	-	-	-	-	-

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Sample Calculation.
 $Margin = Limit - Result$ / $Result = Reading + T.F + DCCF + DCF$ / $T.F = AF + CL - AG$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
3. Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.
 Therefore Distance Correction Factor(DCF) : $-9.54 \text{ dB} = 20 \cdot \log(1\text{m}/3\text{m})$

Radiated Spurious Emissions data(9 kHz ~ 25 GHz) : Test Mode 4(TM 4)

Tested ANT	Tested Frequency	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
ANT 1 + ANT 2	Lowest	2388.79	H	Z	PK	70.99	-0.07	-	-	70.92	74.00	3.08
		2389.34	H	Z	AV	50.93	-0.07	1.18	-	52.04	54.00	1.96
		4844.86	H	Z	PK	44.06	6.70	-	-	50.76	74.00	23.24
		4844.88	H	Z	AV	33.54	6.70	1.18	-	41.42	54.00	12.58
		-	-	-	-	-	-	-	-	-	-	-
	Middle	4874.42	H	Z	PK	44.77	6.80	-	-	51.57	74.00	22.43
		4874.66	H	Z	AV	34.45	6.80	1.18	-	42.43	54.00	11.57
		-	-	-	-	-	-	-	-	-	-	-
	Highest	2489.42	H	Z	PK	68.64	0.26	-	-	68.90	74.00	5.10
		2488.73	H	Z	AV	50.65	0.26	1.18	-	52.09	54.00	1.91
		4904.83	H	Z	PK	44.56	6.90	-	-	51.46	74.00	22.54
		4904.86	H	Z	AV	33.88	6.90	1.18	-	41.96	54.00	12.04
		-	-	-	-	-	-	-	-	-	-	-

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Sample Calculation.
 $Margin = Limit - Result$ / $Result = Reading + T.F + DCCF + DCF$ / $T.F = AF + CL - AG$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
3. Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.
 Therefore Distance Correction Factor(DCF) : $-9.54 \text{ dB} = 20 \cdot \log(1\text{m}/3\text{m})$

8.6 Power-line conducted emissions

Test Requirements and limit, §15.207& RSS-Gen [7.2.2]

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

■ TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to the test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

■ Test Results: **Comply**(Refer to next page.)

The worst data was reported.

RESULT PLOTS

AC Line Conducted Emissions (Graph)

Test mode 3(TM 3) & Middle



Results of Conducted Emission

Date : 2014-08-20

Model No.	: H660W	Reference No.	:
Type	:	Power Supply	: 120V 60Hz
Serial No.	:	Temp/Humi.	: 21°C 39% R.H
Test Condition	: 802.11n(HT20)	Operator	: H.S SON

Memo :

LIMIT : FCC P15.207 QP
FCC P15.207 AV

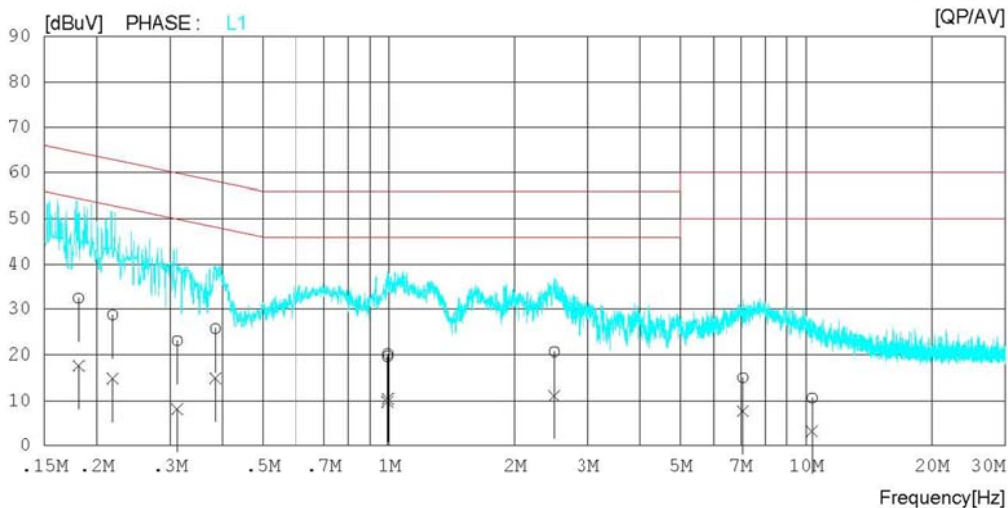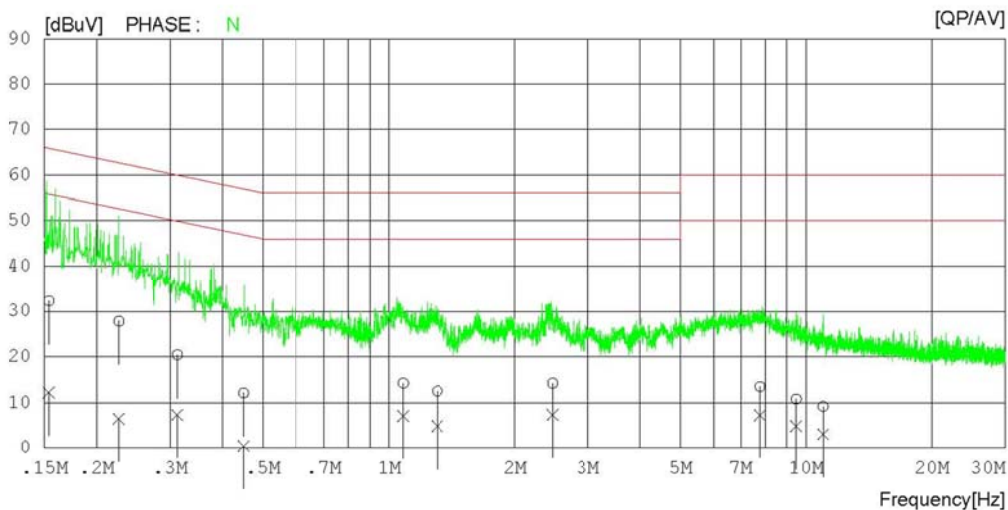

AC Line Conducted Emissions (List)

Test mode 3(TM 3) & Middle

Results of Conducted Emission

Date : 2014-08-20

Model No.	: H660W	Reference No.	:
Type	:	Power Supply	: 120V 60Hz
Serial No.	:	Temp/Humi.	: 21'C 39% R.H
Test Condition	: 802.11n(HT20)	Operator	: H.S SON

Memo :

LIMIT : FCC P15.207 QP
 FCC P15.207 AV


NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15379	32.3	12.2	0.0	32.3	12.2	65.8	55.8	33.5	43.6	N
2	0.22540	27.8	6.5	0.0	27.8	6.5	62.6	52.6	34.8	46.1	N
3	0.31196	20.4	7.3	0.0	20.4	7.3	59.9	49.9	39.5	42.6	N
4	0.44926	12.2	0.4	0.0	12.2	0.4	56.9	46.9	44.7	46.5	N
5	1.08120	14.3	7.1	0.0	14.3	7.1	56.0	46.0	41.7	38.9	N
6	1.30520	12.6	4.8	0.0	12.6	4.8	56.0	46.0	43.4	41.2	N
7	2.46560	14.2	7.3	0.1	14.3	7.4	56.0	46.0	41.7	38.6	N
8	7.78240	13.3	7.0	0.3	13.6	7.3	60.0	50.0	46.4	42.7	N
9	9.47780	10.5	4.6	0.3	10.8	4.9	60.0	50.0	49.2	45.1	N
10	10.97280	8.9	2.8	0.3	9.2	3.1	60.0	50.0	50.8	46.9	N
11	0.18057	32.4	17.7	0.0	32.4	17.7	64.5	54.5	32.1	36.8	L1
12	0.21773	28.7	14.9	0.0	28.7	14.9	62.9	52.9	34.2	38.0	L1
13	0.31180	23.1	8.2	0.0	23.1	8.2	59.9	49.9	36.8	41.7	L1
14	0.38427	25.7	14.9	0.0	25.7	14.9	58.2	48.2	32.5	33.3	L1
15	0.99245	19.7	9.7	0.0	19.7	9.7	56.0	46.0	36.3	36.3	L1
16	0.99420	20.2	10.4	0.0	20.2	10.4	56.0	46.0	35.8	35.6	L1
17	2.48920	20.6	11.0	0.1	20.7	11.1	56.0	46.0	35.3	34.9	L1
18	7.08740	14.8	7.4	0.3	15.1	7.7	60.0	50.0	44.9	42.3	L1
19	10.33620	10.3	3.0	0.3	10.6	3.3	60.0	50.0	49.4	46.7	L1

8.7 Occupied bandwidth

Test Requirements, RSS-Gen [4.6.1]

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99 % emission bandwidth, as calculated or measured.

■ TEST CONFIGURATION

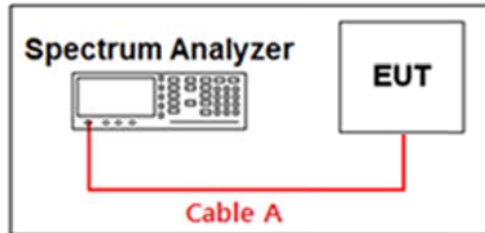

■ TEST PROCEDURE

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

■ TEST RESULTS: N/A

Test Mode	Frequency	Test Results[MHz]	
		ANT 1	ANT 2
TM 1	Lowest	-	-
	Middle	-	-
	Highest	-	-
TM 2	Lowest	-	-
	Middle	-	-
	Highest	-	-
TM 3	Lowest	-	-
	Middle	-	-
	Highest	-	-
TM 4	Lowest	-	-
	Middle	-	-
	Highest	-	-

9. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	E4440A	13/10/24	14/10/24	US45303051
MXA Signal Analyzer	Agilent	N9020A	13/09/24	14/09/24	MY50200834
Dynamic Measurement DC Source	Agilent	66332A	14/02/07	15/02/07	GB37470190
Vector Signal Generator	Rohde Schwarz	SMBV100A	14/01/07	15/01/07	255571
Signal Generator	Rohde Schwarz	SMF100A	14/07/01	15/07/01	102341
Multimeter	HP	34401A	14/02/27	15/02/27	3146A13475
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2496A/ MA2411B	13/10/29	14/10/29	1338004 / 1306053
50W 10dB ATT	SMAJK	SMAJK-50-10	13/10/23	14/10/23	3-50-10
PreAmplifier	Agilent	8449B	14/02/27	15/02/27	3008A00370
Amplifier	HP	8447E	14/01/08	15/01/08	2945A02865
High-pass filter	Wainwright Instruments	WHKX3.0	14/01/07	15/01/07	12
Loop Antenna	Schwarzbeck	FMZB1513	14/04/29	16/04/29	1513-128
BILOG ANTENNA	SCHAFFNER	CBL6112B	12/11/06	14/11/06	2737
Double-Ridged Guide Antenna	ETS-LINDGREN	3117	14/05/12	16/05/12	00140394
HORN ANT	A.H.Systems	SAS-574	13/03/20	15/03/20	154
EMI TEST RECEIVER	R&S	ESU	14/01/08	15/01/08	100014
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESR	14/02/07	15/02/07	101767
CVCF	NF	4420	13/09/12	14/09/12	3049354420023
LISN	R&S	ESH2-Z5	13/09/12	14/09/12	828739/006
Thermohygrometer	BODYCOM	BJ5478	14/05/13	15/05/13	120612-2

APPENDIX I

Duty cycle information

TEST PROCEDURE

Duty cycle measured using **section 6.0 b) of KDB558074 v03r2** :

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average.


The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST DATA


Test Mode	Tested frequency	T _{ON} (ms)	T _{ON+OFF} (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
TM 1	Middle	8.43	8.64	97.57	0.11
TM 2	Middle	1.395	1.595	87.46	0.59
TM 3	Middle	1.31	1.51	86.75	0.62
TM 4	Middle	0.648	0.849	76.33	1.18

Please refer to next page for actual test plot.


Duty cycle data : **TM 1 & ANT 1**

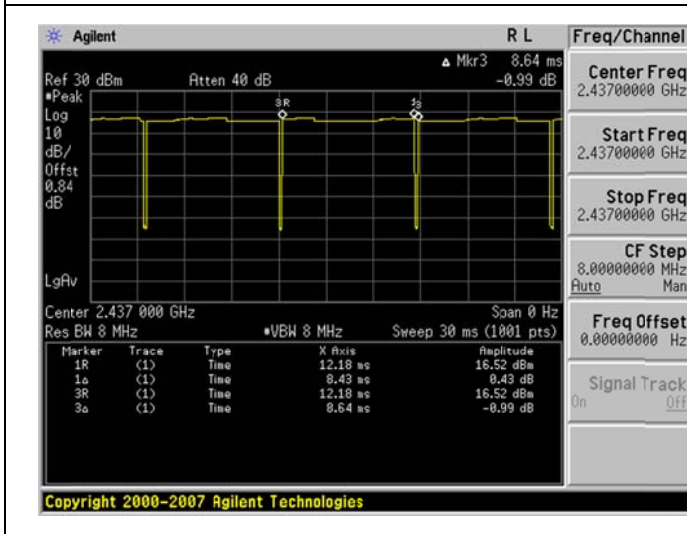

Duty cycle data : **TM 2 & ANT 1**

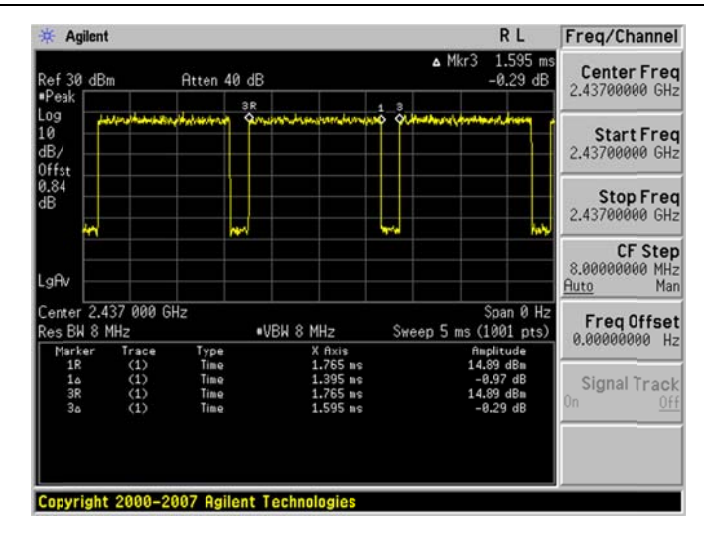

Duty cycle data : **TM 3 & ANT 1**

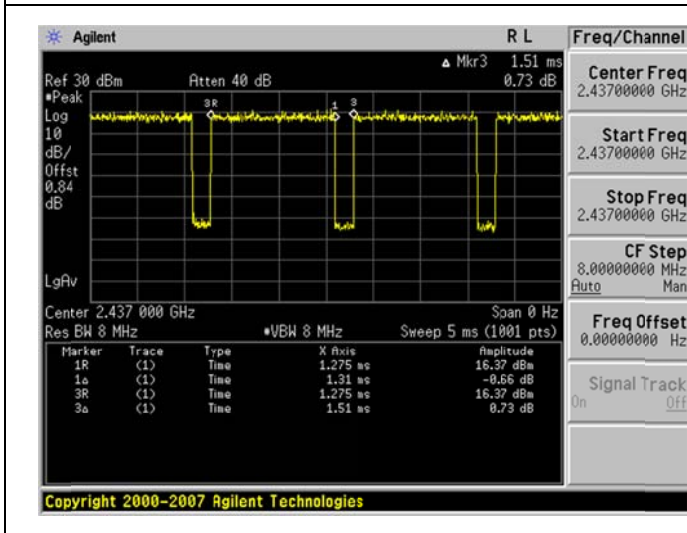

Duty cycle data : **TM 4 & ANT 1**

