


Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Horizontal

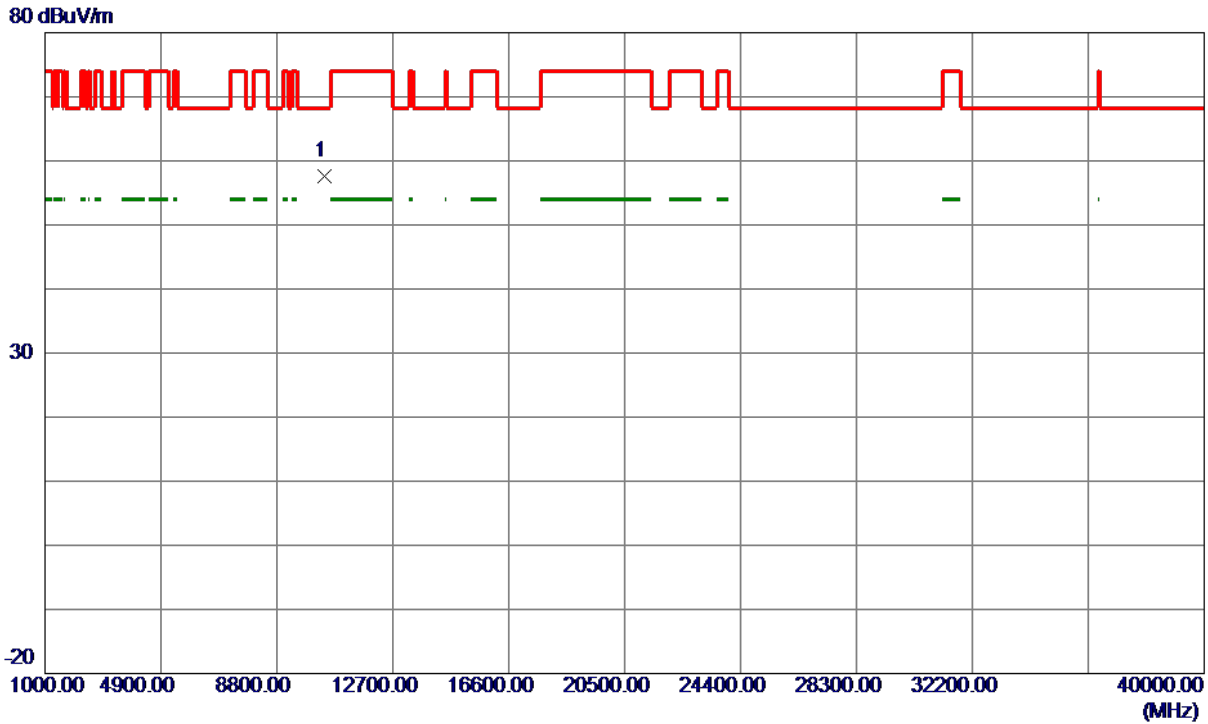

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10398.9750	46.27	11.36	57.63	68.30	-10.67	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Vertical

130 dBuV/m

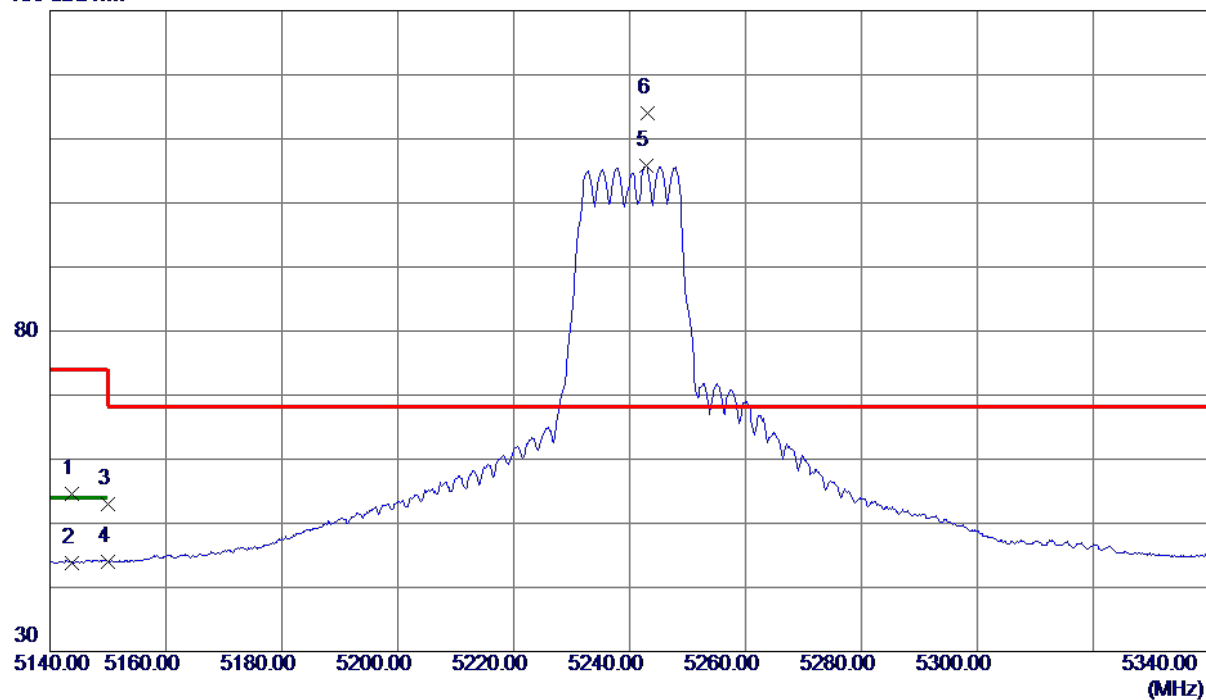


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5143.8000	40.31	14.30	54.61	74.00	-19.39	Peak	
2	5143.8000	29.56	14.30	43.86	54.00	-10.14	AVG	
3	5150.0000	38.73	14.32	53.05	74.00	-20.95	Peak	
4	5150.0000	29.72	14.32	44.04	54.00	-9.96	AVG	
5	5242.8000	91.21	14.54	105.75	999.00	-893.25	AVG	No Limit
6 *	5243.2000	99.49	14.54	114.03	68.30	45.73	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Vertical

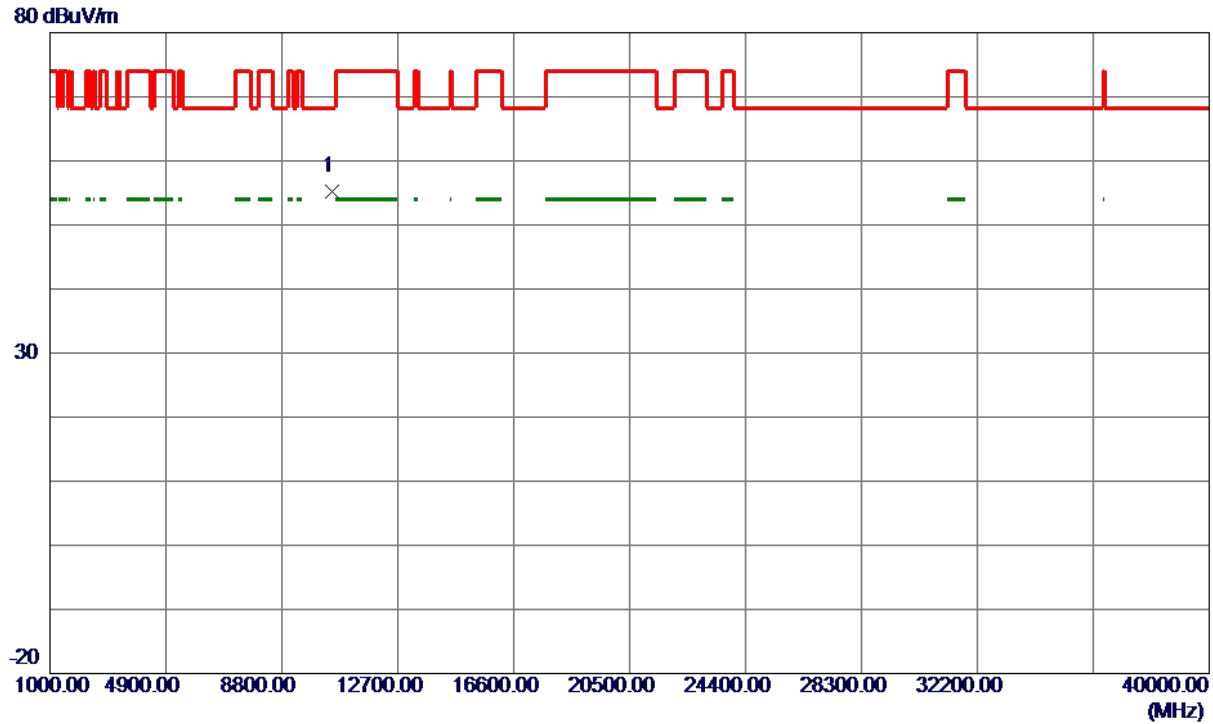


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10479.3000	43.79	11.50	55.29	68.30	-13.01	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Horizontal

130 dBuV/m

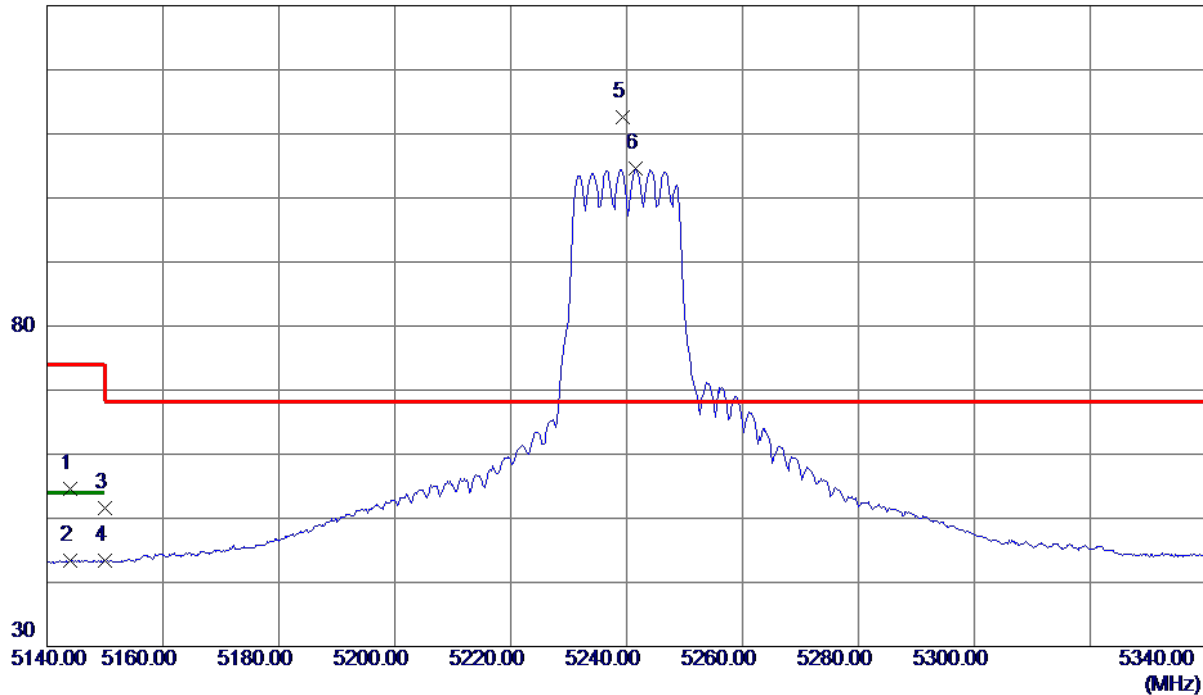


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5144.1000	40.21	14.30	54.51	74.00	-19.49	Peak	
2	5144.1000	29.06	14.30	43.36	54.00	-10.64	AVG	
3	5150.0000	37.37	14.32	51.69	74.00	-22.31	Peak	
4	5150.0000	29.11	14.32	43.43	54.00	-10.57	AVG	
5 *	5239.4000	98.02	14.53	112.55	68.30	44.25	Peak	No Limit
6	5241.6000	90.00	14.53	104.53	999.00	-894.47	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Horizontal

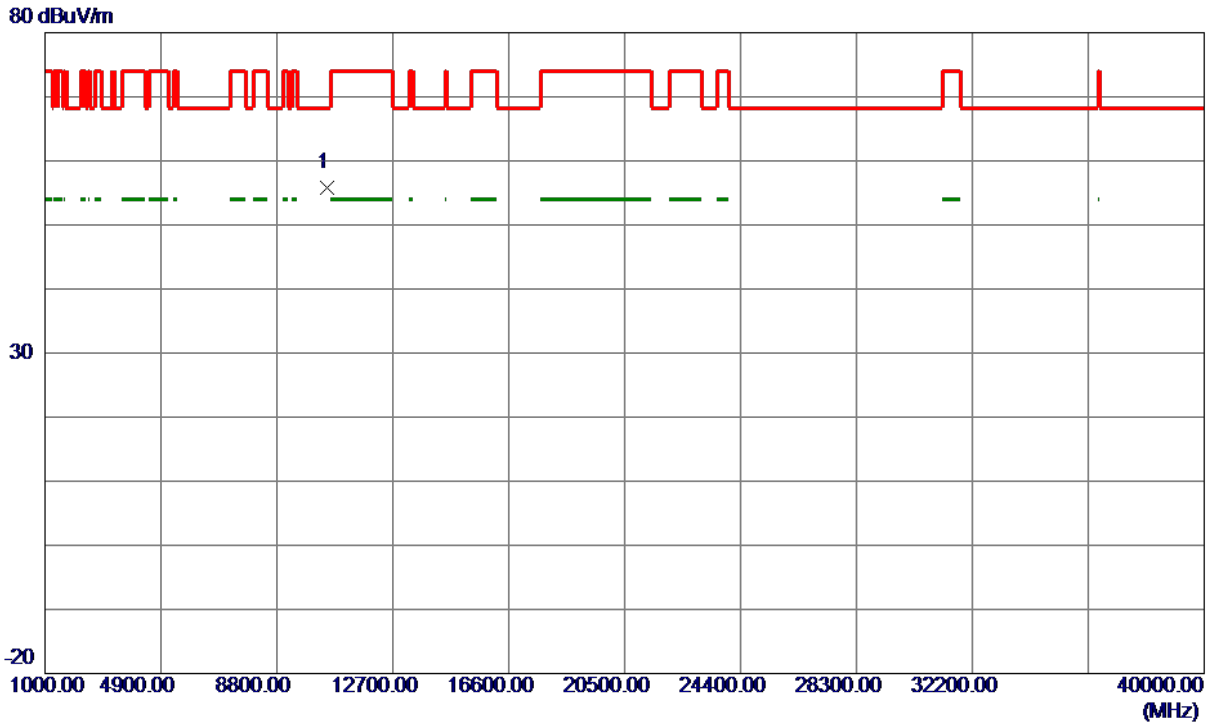

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10476.9500	44.29	11.50	55.79	68.30	-12.51	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Vertical

130 dBuV/m

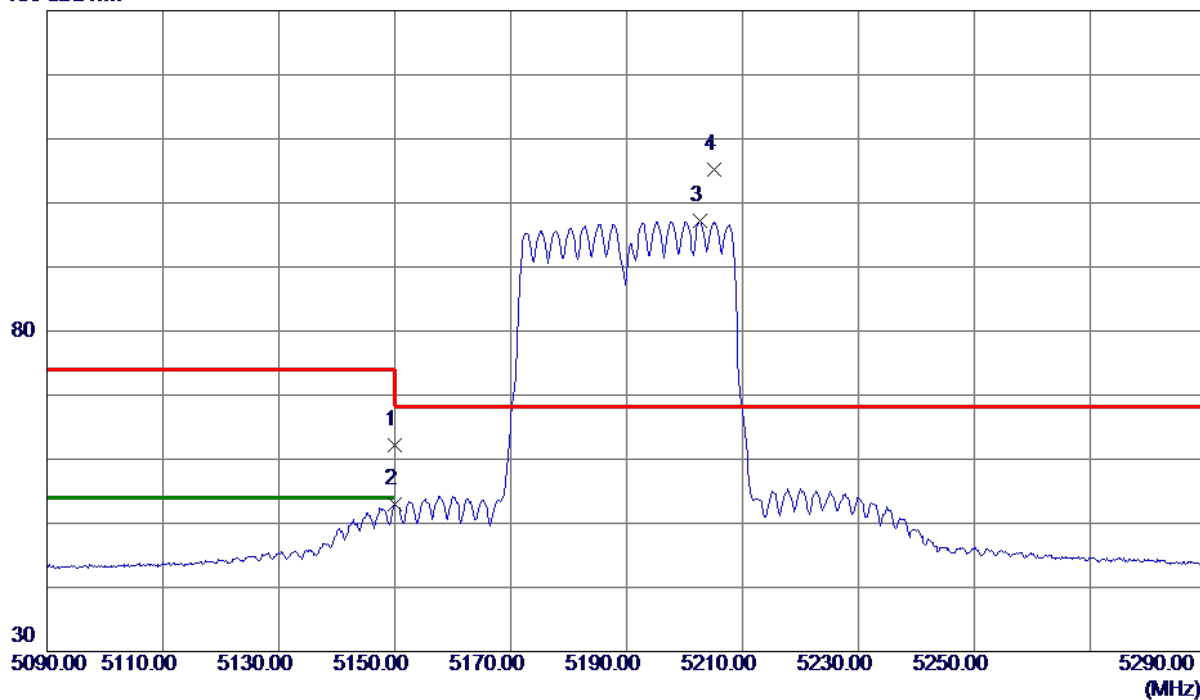


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	47.96	14.32	62.28	74.00	-11.72	Peak	
2	5150.0000	38.61	14.32	52.93	54.00	-1.07	AVG	
3	5202.6000	82.69	14.44	97.13	999.00	-901.87	AVG	No Limit
4 *	5205.2000	90.71	14.45	105.16	68.30	36.86	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Vertical

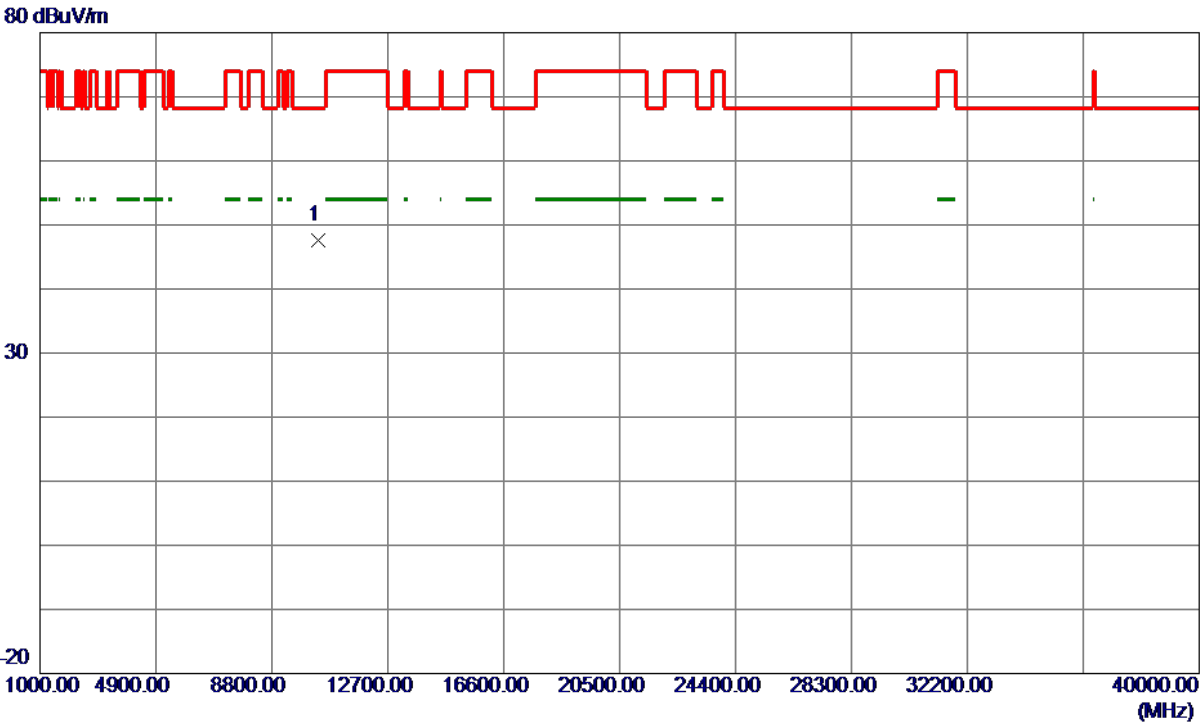


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10378.7500	36.28	11.33	47.61	68.30	-20.69	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Horizontal

130 dBuV/m

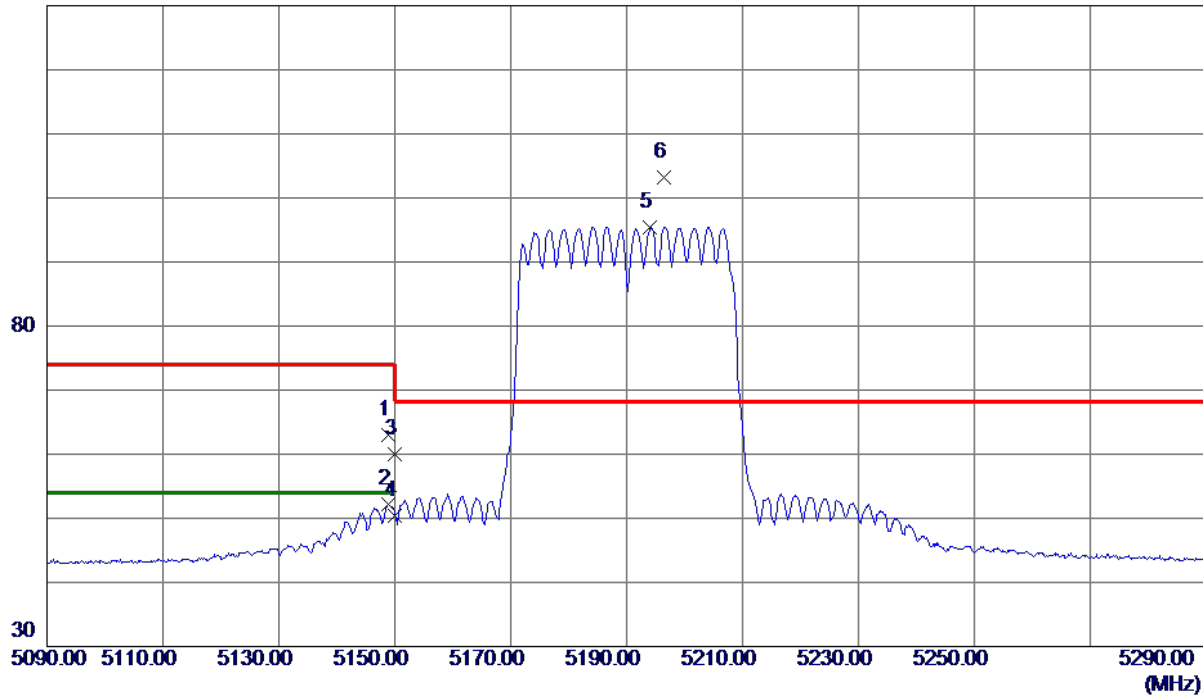


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.8000	48.69	14.31	63.00	74.00	-11.00	Peak	
2	5148.8000	37.96	14.31	52.27	54.00	-1.73	AVG	
3	5150.0000	45.59	14.32	59.91	74.00	-14.09	Peak	
4	5150.0000	36.15	14.32	50.47	54.00	-3.53	AVG	
5	5194.1000	81.02	14.42	95.44	999.00	-903.56	AVG	No Limit
6 *	5196.4000	88.76	14.43	103.19	68.30	34.89	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Horizontal

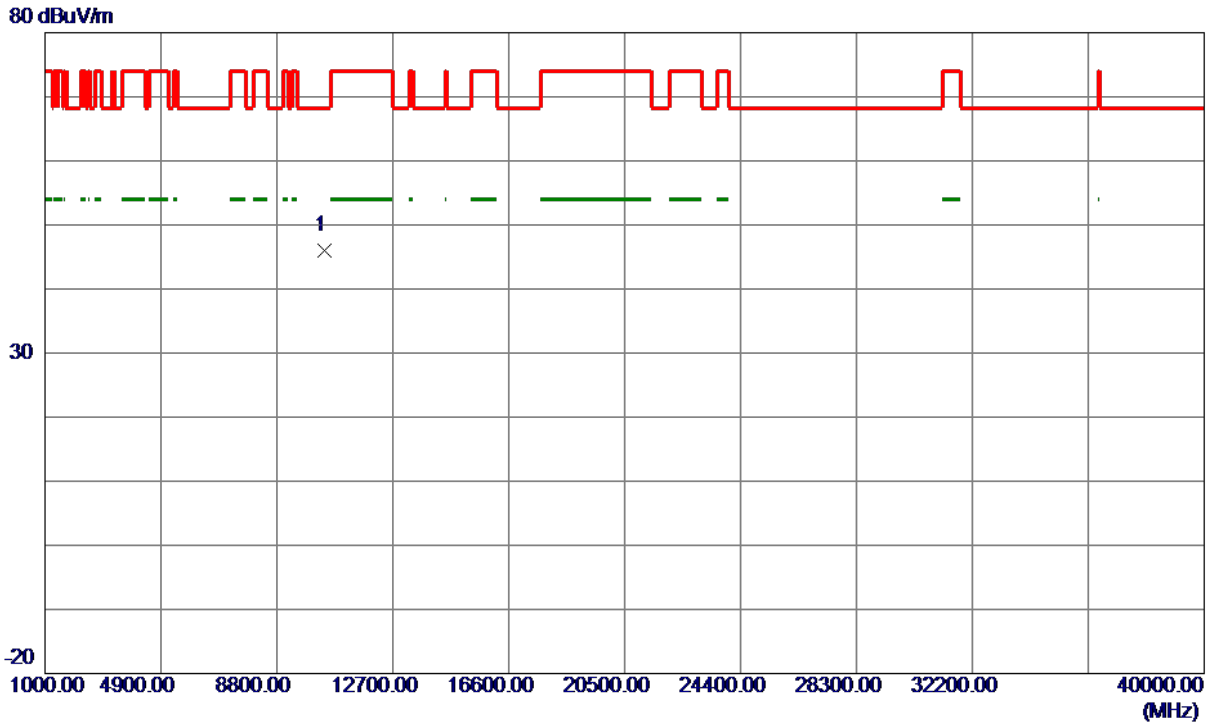

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10402.1500	34.58	11.37	45.95	68.30	-22.35	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Vertical

130 dBuV/m

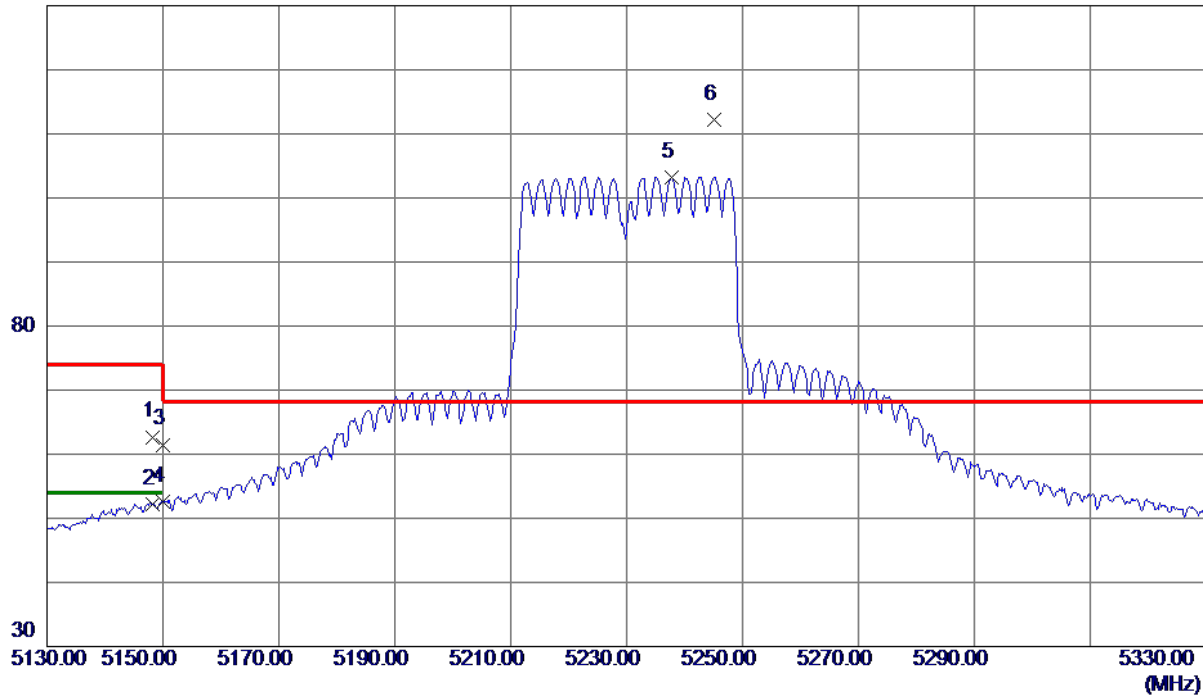


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.2000	48.39	14.31	62.70	74.00	-11.30	Peak	
2	5148.2000	37.87	14.31	52.18	54.00	-1.82	AVG	
3	5150.0000	47.18	14.32	61.50	74.00	-12.50	Peak	
4	5150.0000	38.22	14.32	52.54	54.00	-1.46	AVG	
5	5237.7000	88.71	14.52	103.23	999.00	-895.77	AVG	No Limit
6 *	5245.1000	97.75	14.54	112.29	68.30	43.99	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Vertical

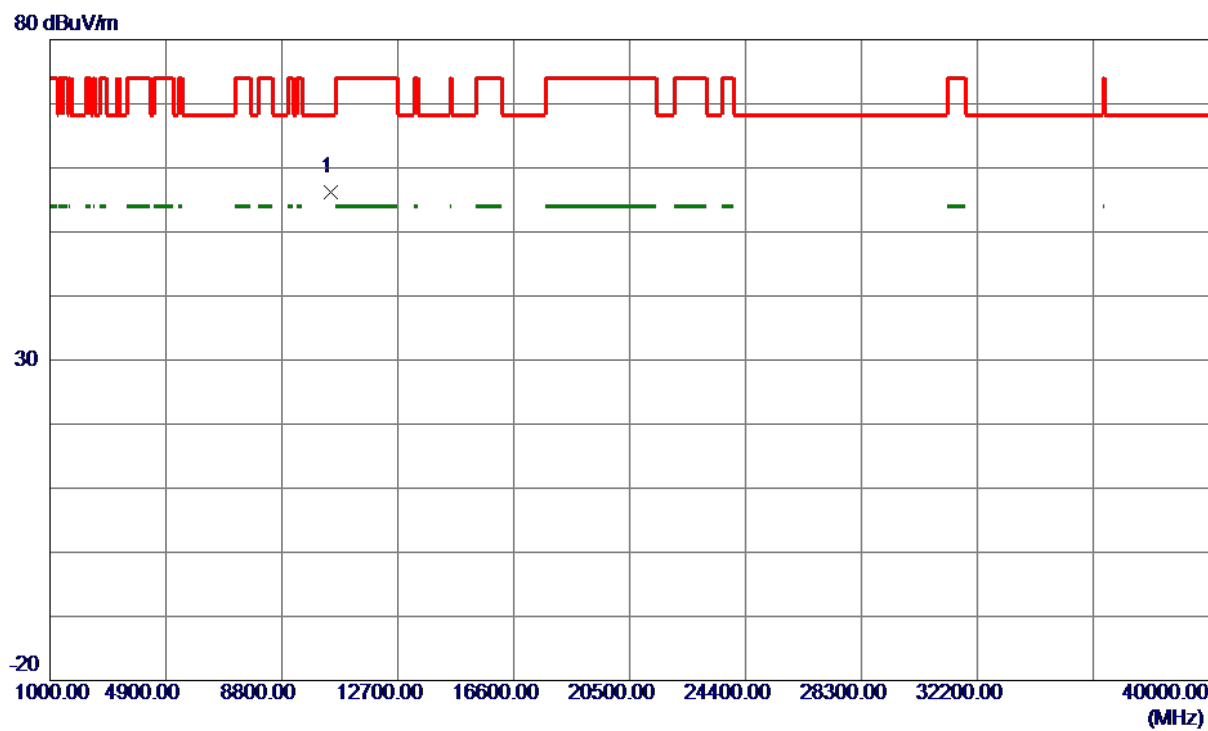

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10456.7500	44.74	11.46	56.20	68.30	-12.10	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Horizontal

130 dBuV/m

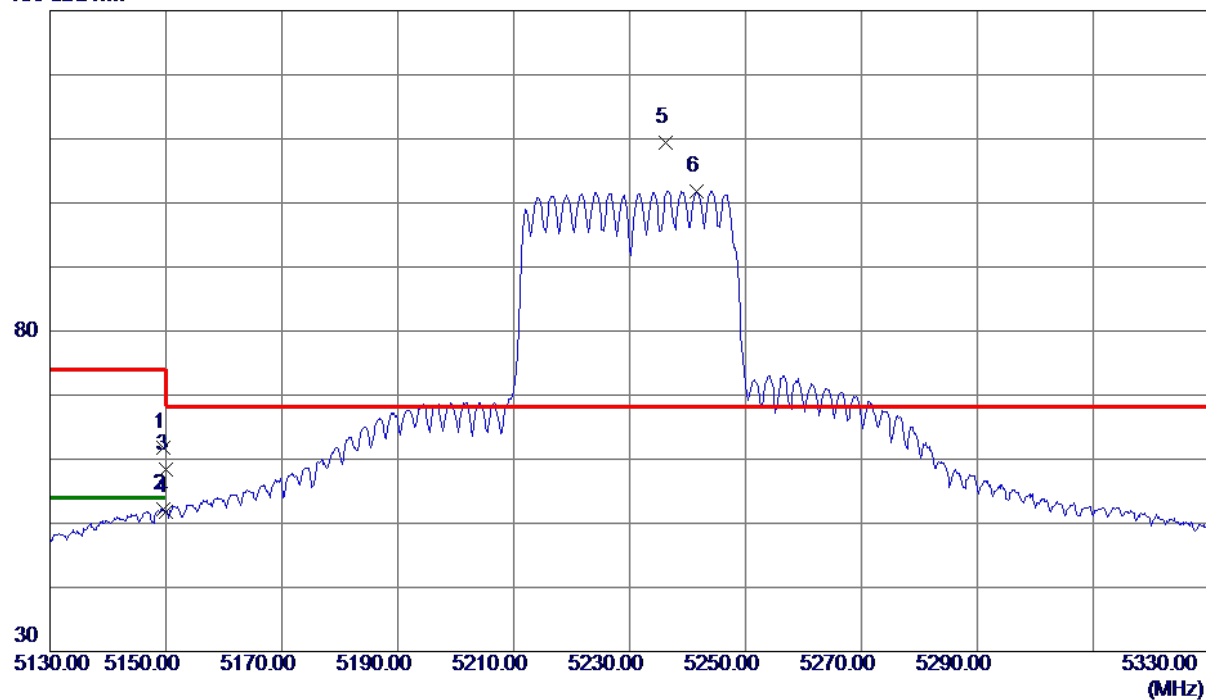


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.6000	47.55	14.31	61.86	74.00	-12.14	Peak	
2	5149.6000	37.90	14.31	52.21	54.00	-1.79	AVG	
3	5150.0000	44.06	14.32	58.38	74.00	-15.62	Peak	
4	5150.0000	37.55	14.32	51.87	54.00	-2.13	AVG	
5 *	5236.2000	94.91	14.52	109.43	68.30	41.13	Peak	No Limit
6	5241.6000	87.33	14.53	101.86	999.00	-897.14	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Horizontal

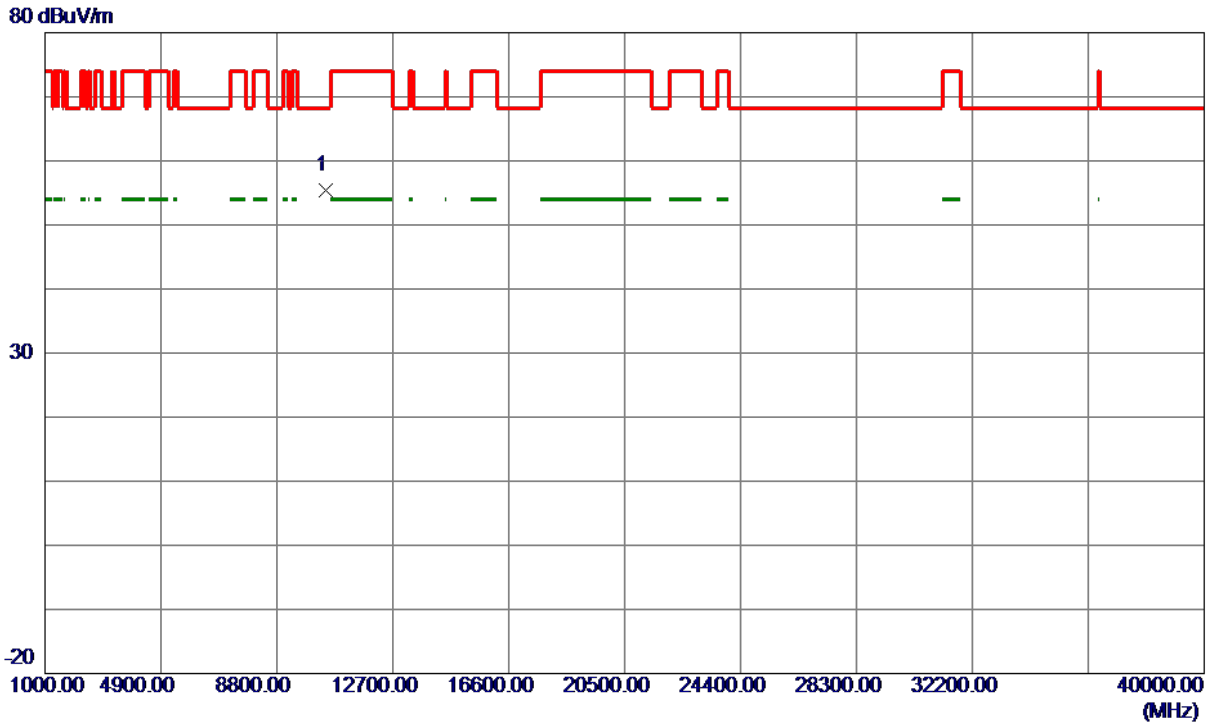

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10458.7500	43.95	11.47	55.42	68.30	-12.88	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Vertical

130 dBuV/m

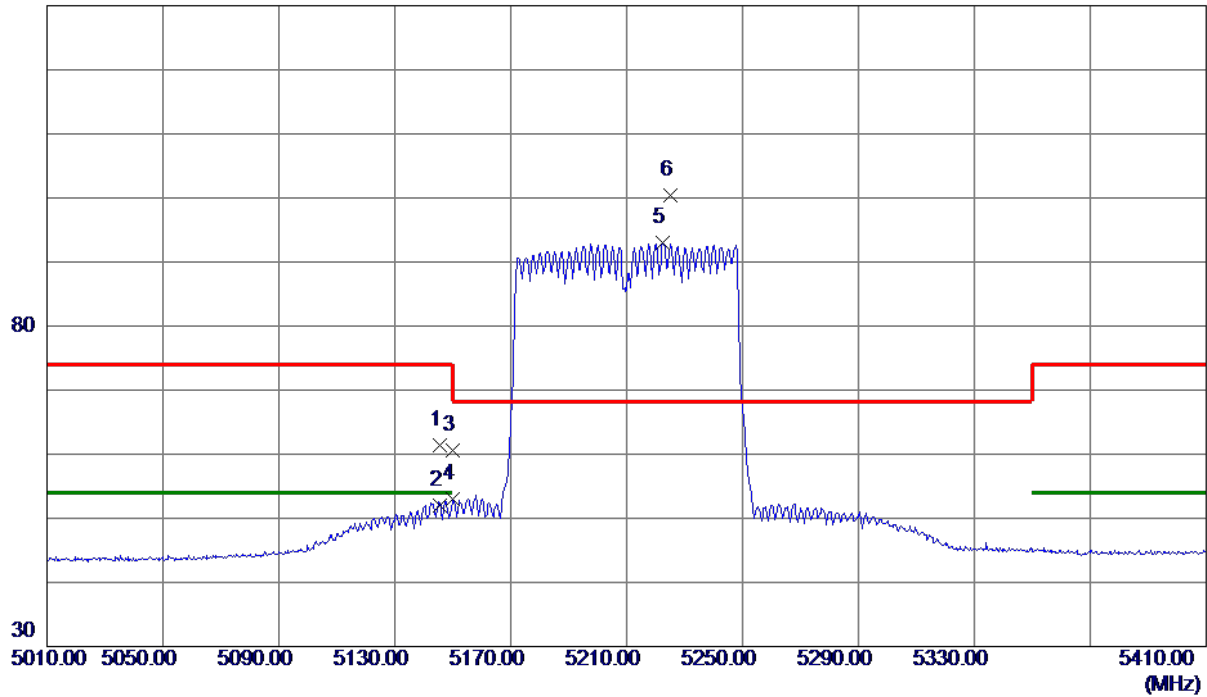


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5145.4000	47.05	14.30	61.35	74.00	-12.65	Peak	
2	5145.4000	37.75	14.30	52.05	54.00	-1.95	AVG	
3	5150.0000	46.33	14.32	60.65	74.00	-13.35	Peak	
4	5150.0000	38.68	14.32	53.00	54.00	-1.00	AVG	
5	5222.6000	78.49	14.49	92.98	999.00	-906.02	AVG	No Limit
6 *	5225.2000	85.91	14.49	100.40	68.30	32.10	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Vertical

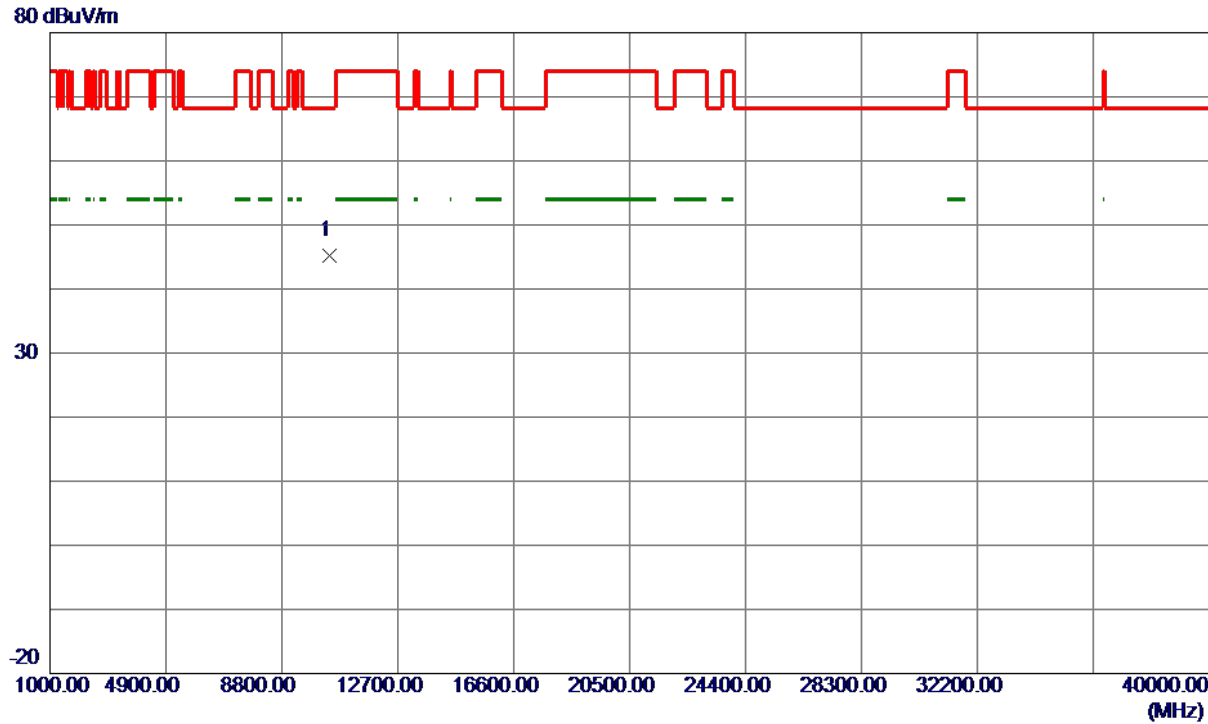


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10418.0300	33.75	11.40	45.15	68.30	-23.15	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Horizontal

130 dBuV/m

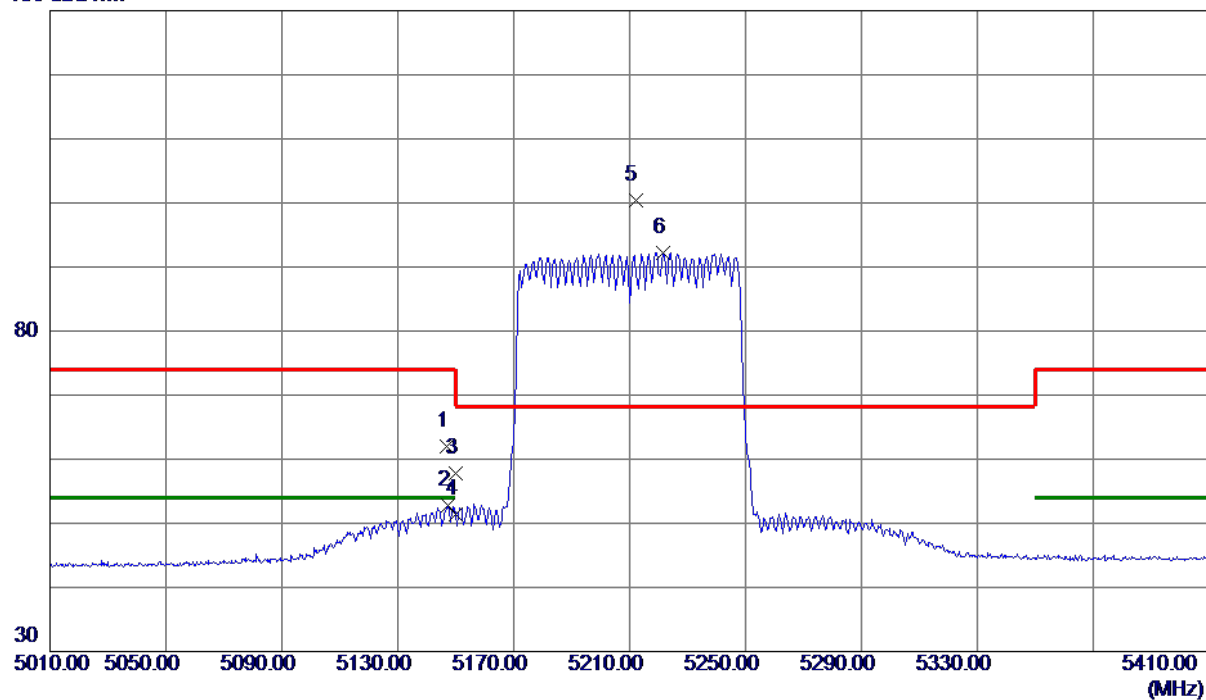

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.0000	47.68	14.31	61.99	74.00	-12.01	Peak	
2	5147.2000	38.57	14.31	52.88	54.00	-1.12	AVG	
3	5150.0000	43.54	14.32	57.86	74.00	-16.14	Peak	
4	5150.0000	37.09	14.32	51.41	54.00	-2.59	AVG	
5 *	5212.0000	85.98	14.46	100.44	68.30	32.14	Peak	No Limit
6	5221.6000	77.76	14.49	92.25	999.00	-906.75	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Horizontal

80 dBuV/m

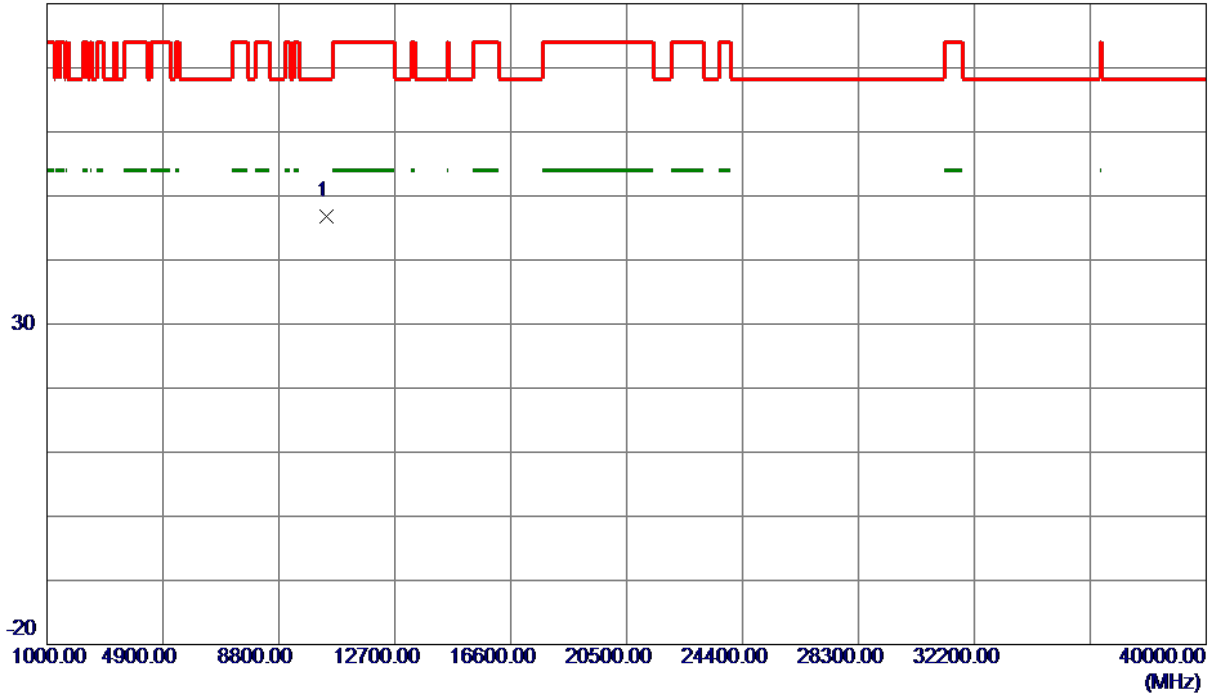

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10416.3400	35.41	11.39	46.80	68.30	-21.50	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5260 MHz

Vertical

130 dBuV/m

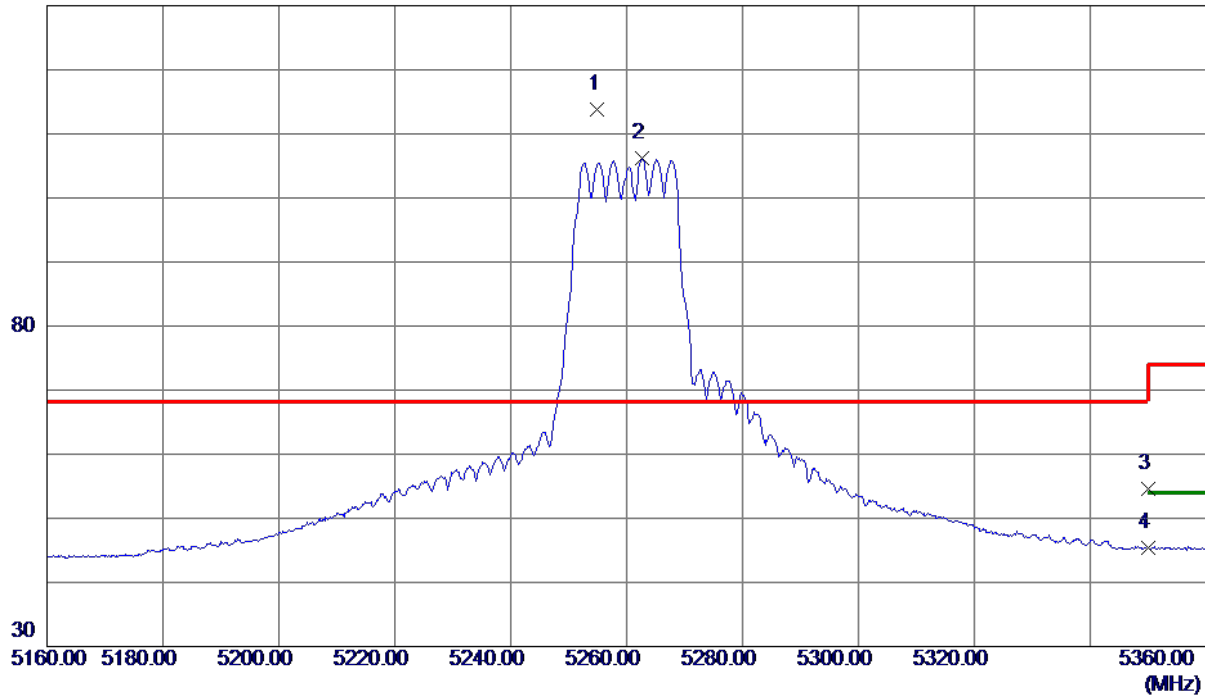


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5255.0000	99.33	14.56	113.89	68.30	45.59	Peak	No Limit
2	5262.7000	91.55	14.58	106.13	999.00	-892.87	AVG	No Limit
3	5350.0000	39.78	14.79	54.57	74.00	-19.43	Peak	
4	5350.0000	30.58	14.79	45.37	54.00	-8.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5260 MHz

Vertical

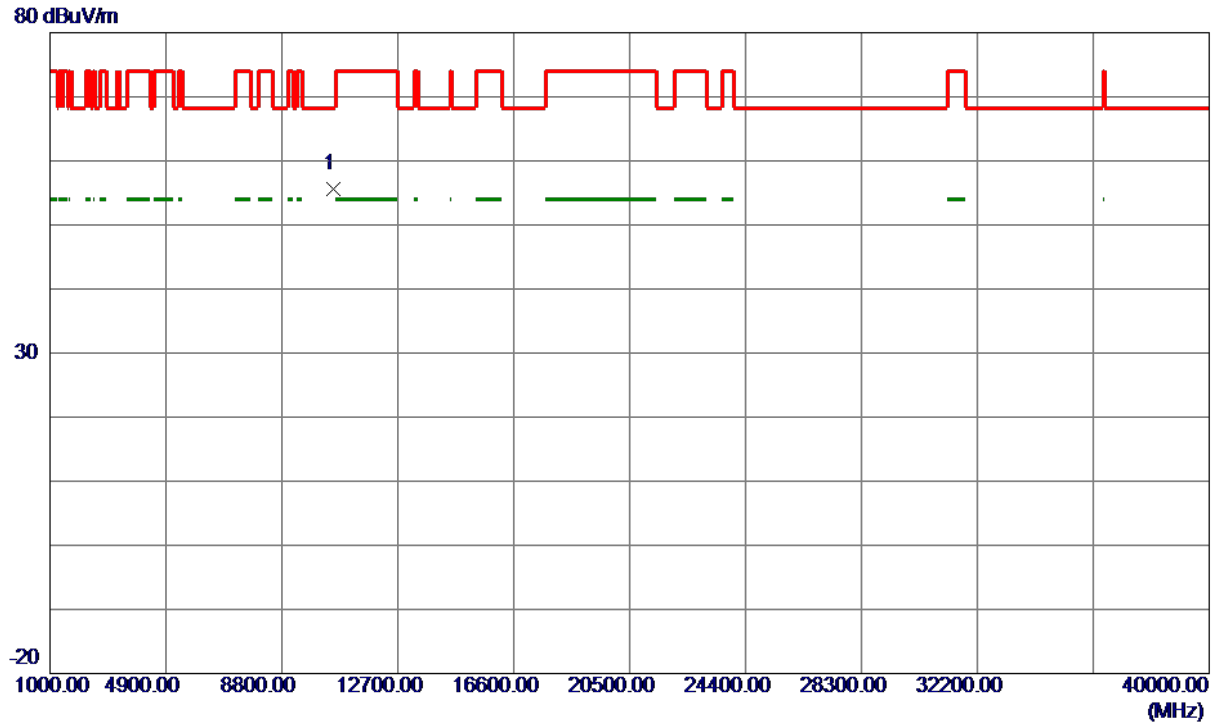

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10519.5500	44.13	11.54	55.67	68.30	-12.63	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5260 MHz

Horizontal

130 dBuV/m

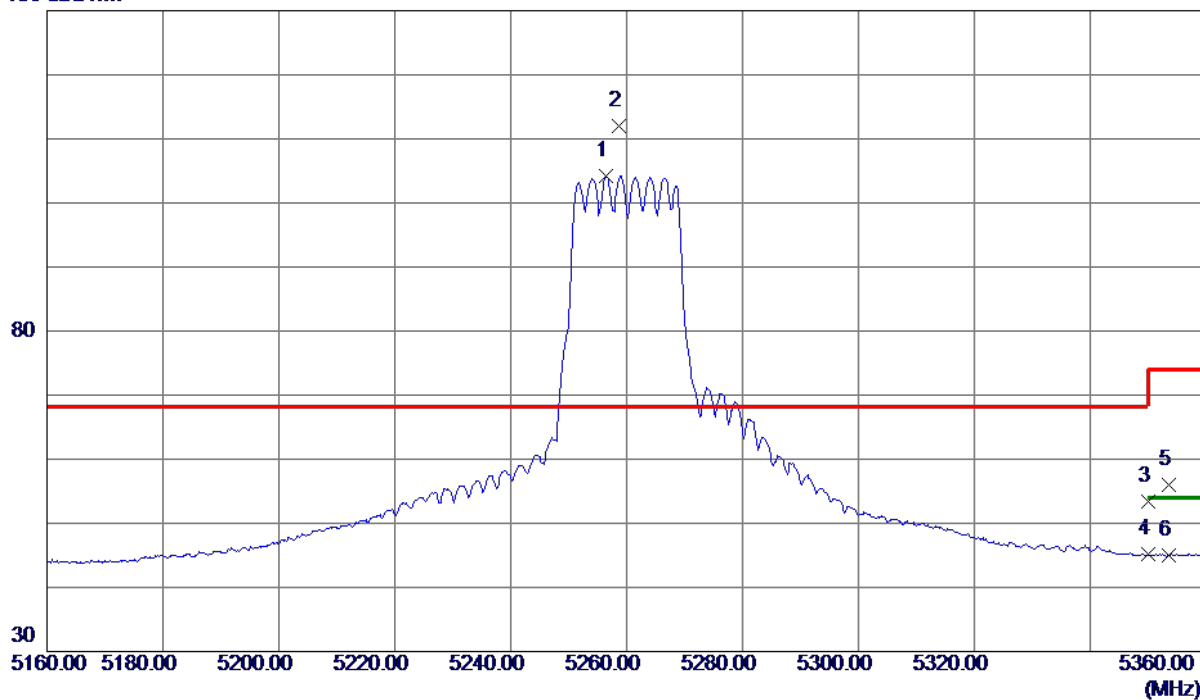

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5256.4000	89.62	14.57	104.19	999.00	-894.81	AVG	No Limit
2 *	5258.7000	97.37	14.57	111.94	68.30	43.64	Peak	No Limit
3	5350.0000	38.69	14.79	53.48	74.00	-20.52	Peak	
4	5350.0000	30.32	14.79	45.11	54.00	-8.89	AVG	
5	5353.6000	41.24	14.80	56.04	74.00	-17.96	Peak	
6	5353.6000	30.27	14.80	45.07	54.00	-8.93	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5260 MHz

Horizontal

80 dBuV/m

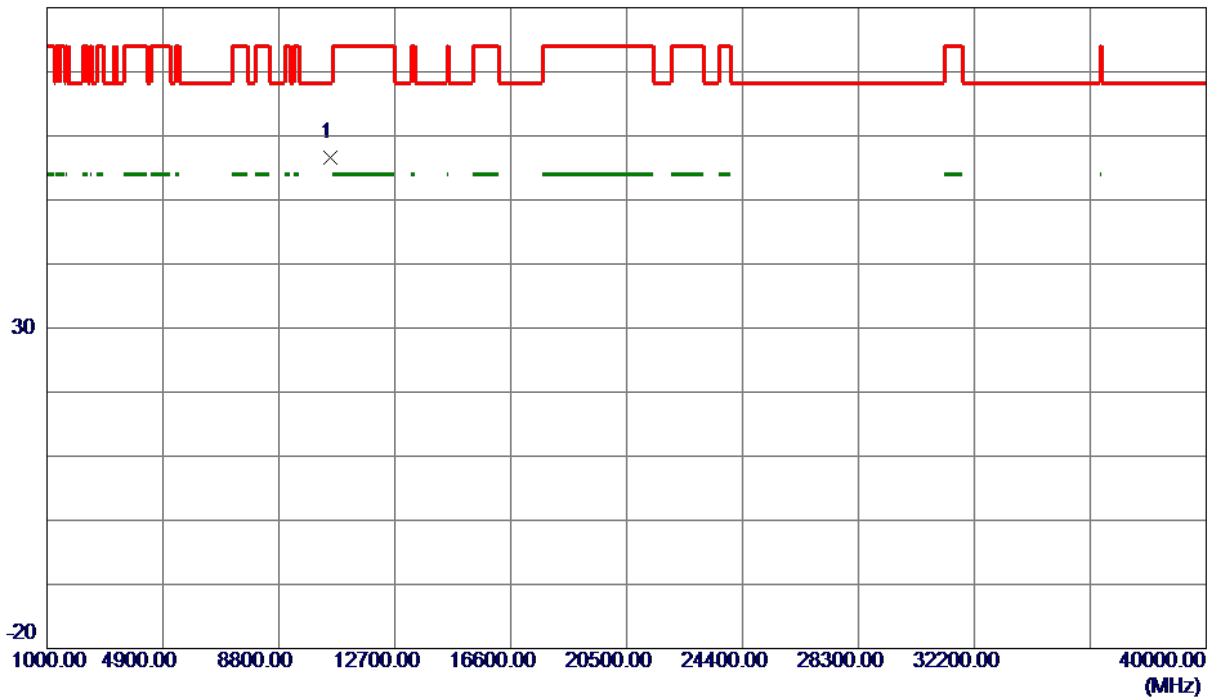

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10521.8750	45.10	11.54	56.64	68.30	-11.66	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5300 MHz

Vertical

130 dBuV/m

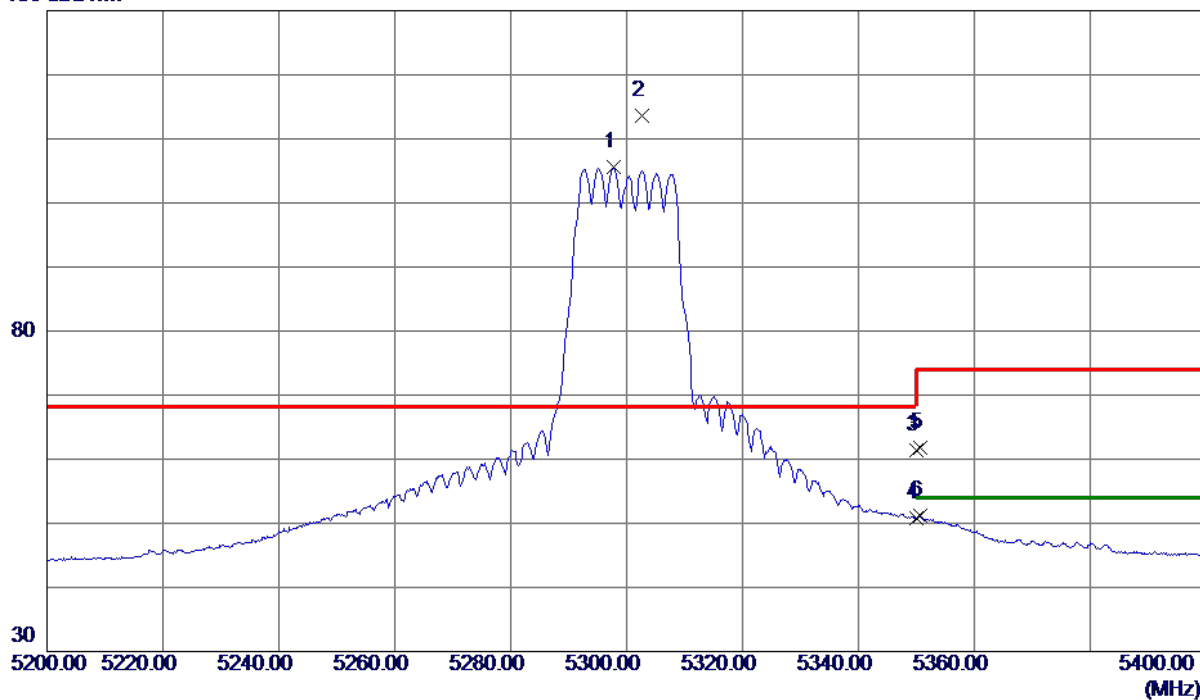


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5297.7000	90.92	14.67	105.59	999.00	-893.41	AVG	No Limit
2 *	5302.6000	98.85	14.68	113.53	68.30	45.23	Peak	No Limit
3	5350.0000	46.62	14.79	61.41	74.00	-12.59	Peak	
4	5350.0000	35.98	14.79	50.77	54.00	-3.23	AVG	
5	5350.6000	47.02	14.79	61.81	74.00	-12.19	Peak	
6	5350.6000	36.46	14.79	51.25	54.00	-2.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5300 MHz

Vertical

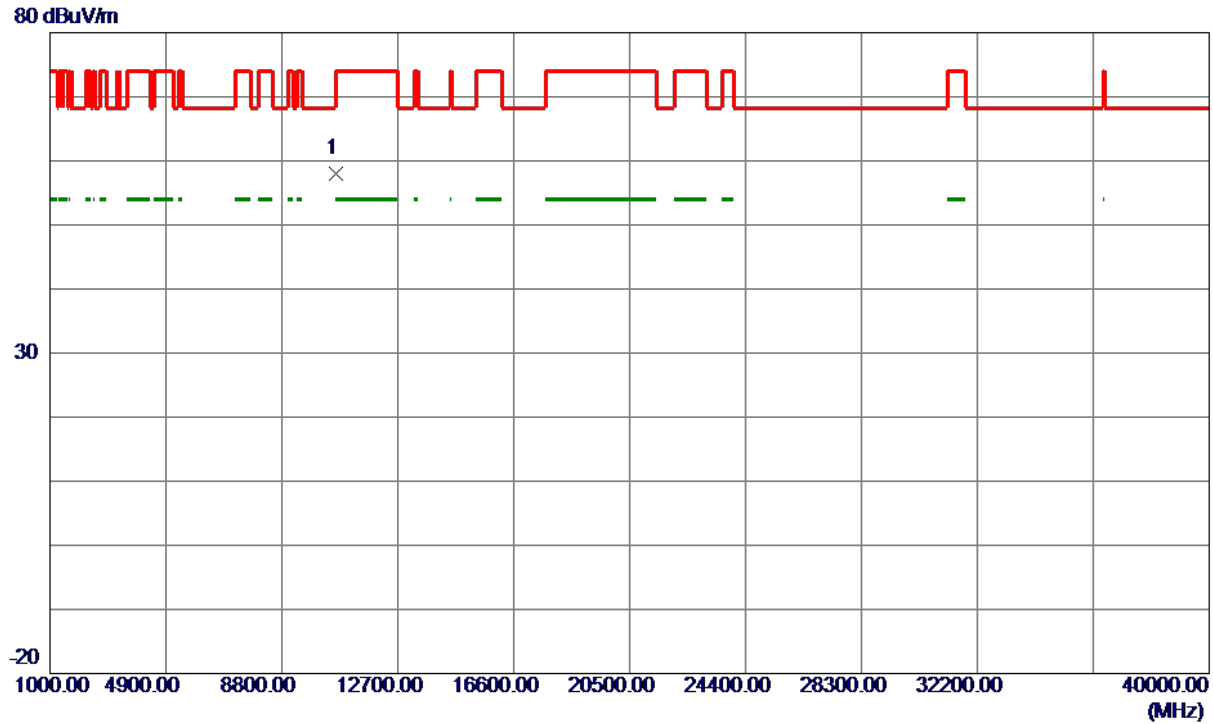


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10599.0500	46.40	11.55	57.95	68.30	-10.35	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5300 MHz

Horizontal

130 dBuV/m

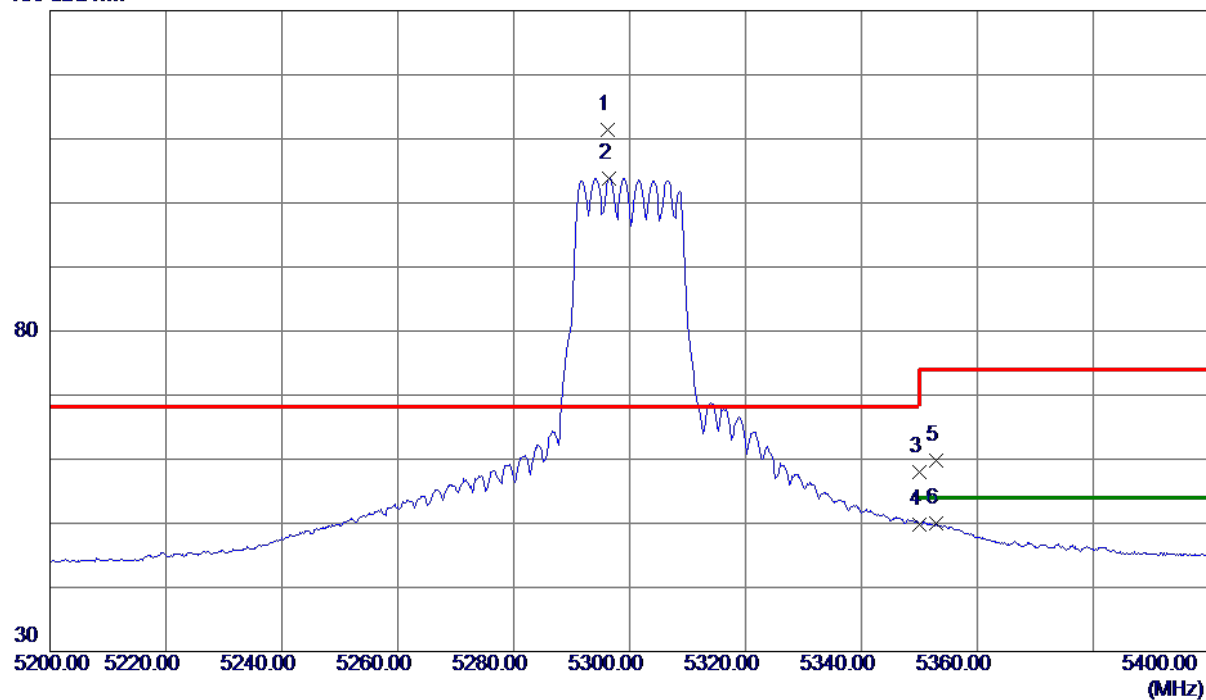

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5296.3000	96.75	14.66	111.41	68.30	43.11	Peak	No Limit
2	5296.5000	89.15	14.66	103.81	999.00	-895.19	AVG	No Limit
3	5350.0000	43.14	14.79	57.93	74.00	-16.07	Peak	
4	5350.0000	35.00	14.79	49.79	54.00	-4.21	AVG	
5	5352.8000	45.00	14.80	59.80	74.00	-14.20	Peak	
6	5352.8000	35.13	14.80	49.93	54.00	-4.07	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5300 MHz

Horizontal

80 dBuV/m

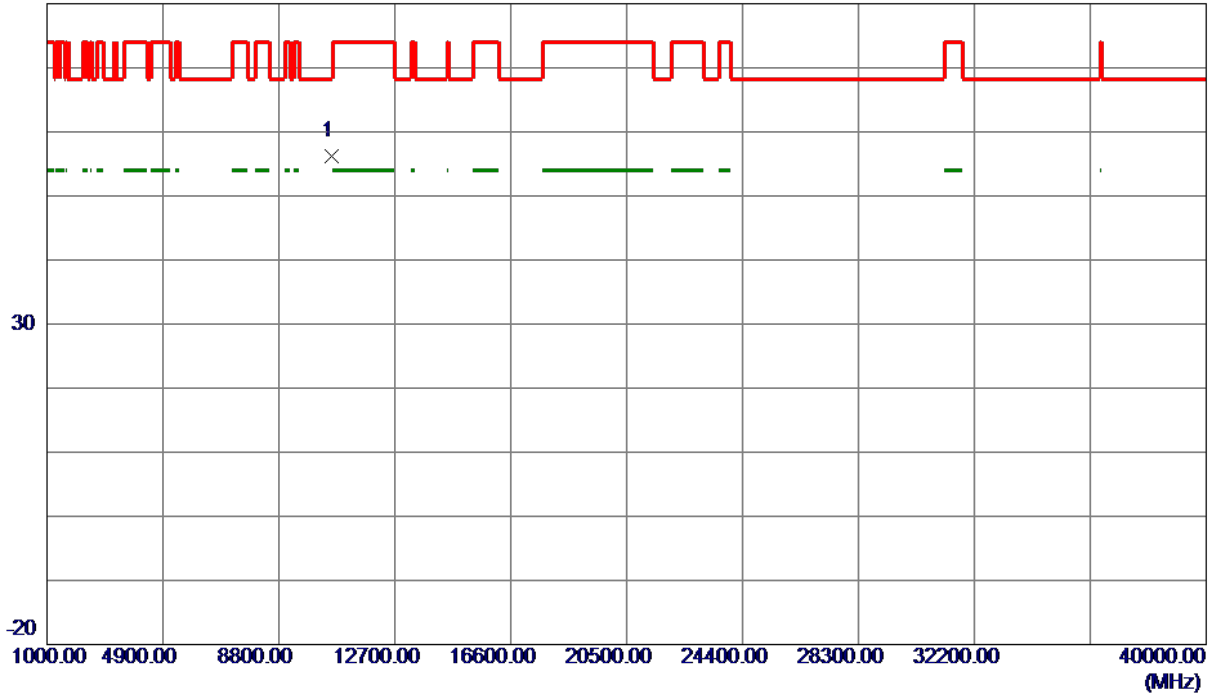

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10594.1750	44.64	11.55	56.19	68.30	-12.11	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz

Vertical

130 dBuV/m

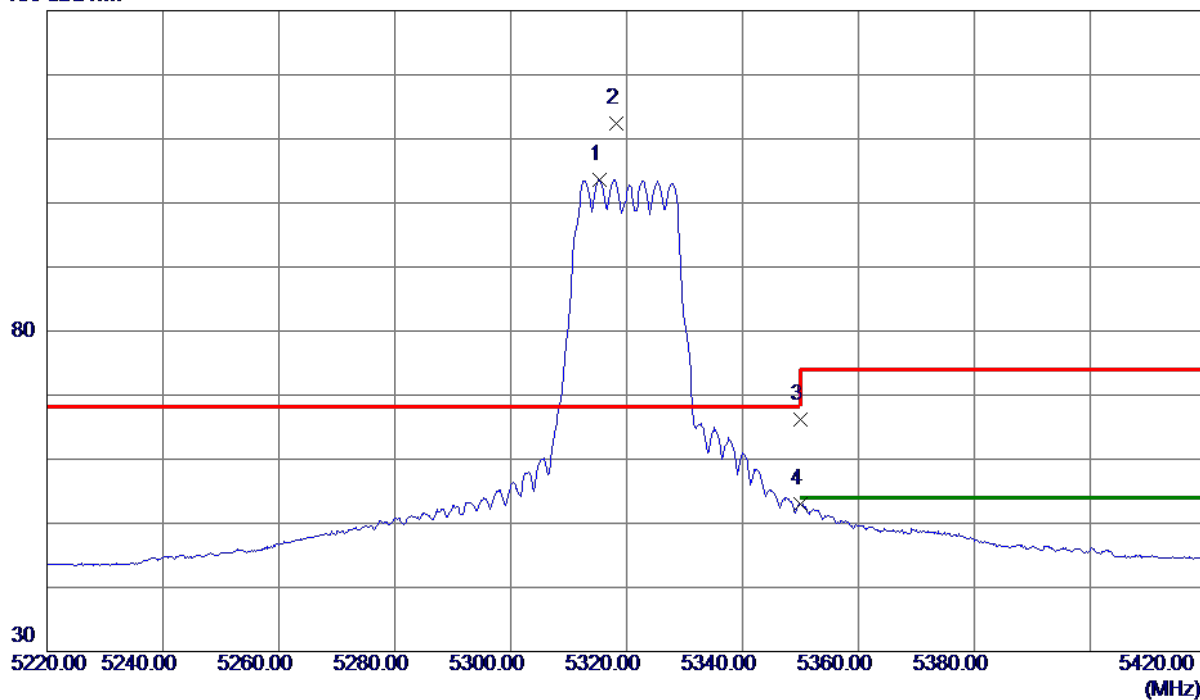


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5315.3000	88.94	14.71	103.65	999.00	-895.35	AVG	No Limit
2 *	5318.3000	97.67	14.71	112.38	68.30	44.08	Peak	No Limit
3	5350.0000	51.35	14.79	66.14	74.00	-7.86	Peak	
4	5350.0000	38.27	14.79	53.06	54.00	-0.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz

Vertical

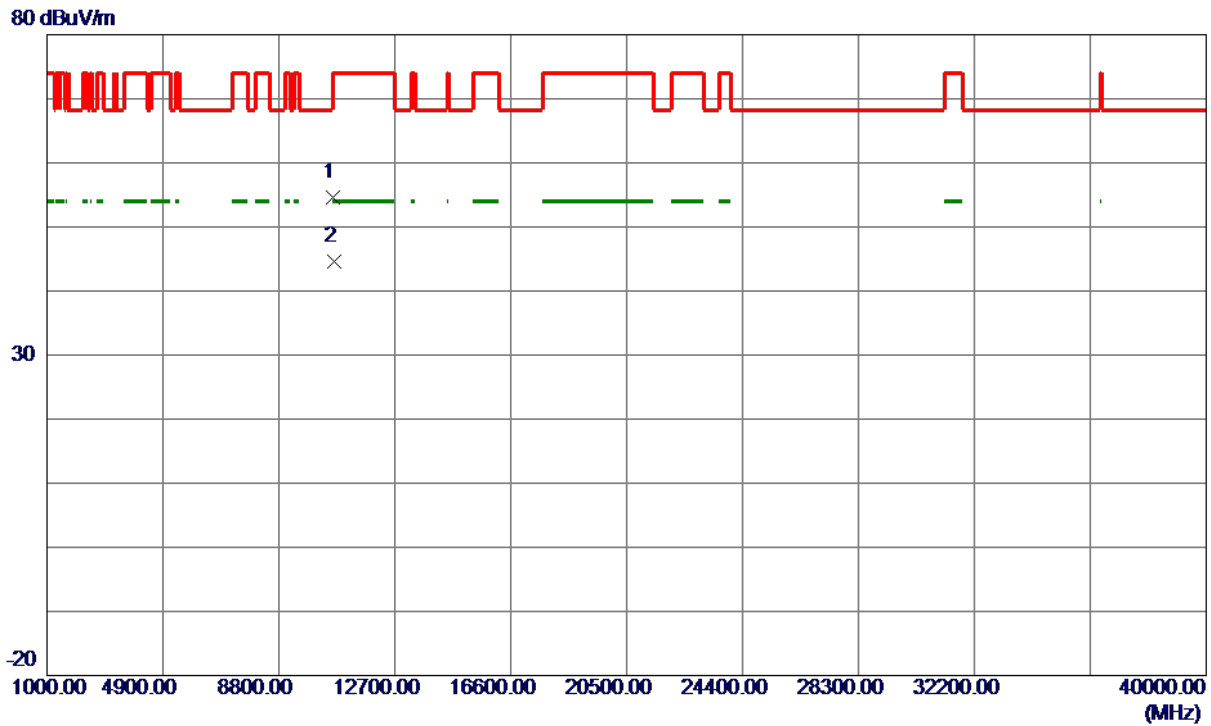

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10641.6250	43.01	11.56	54.57	74.00	-19.43	Peak	
2 *	10641.8250	33.01	11.56	44.57	54.00	-9.43	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz

Horizontal

130 dBuV/m

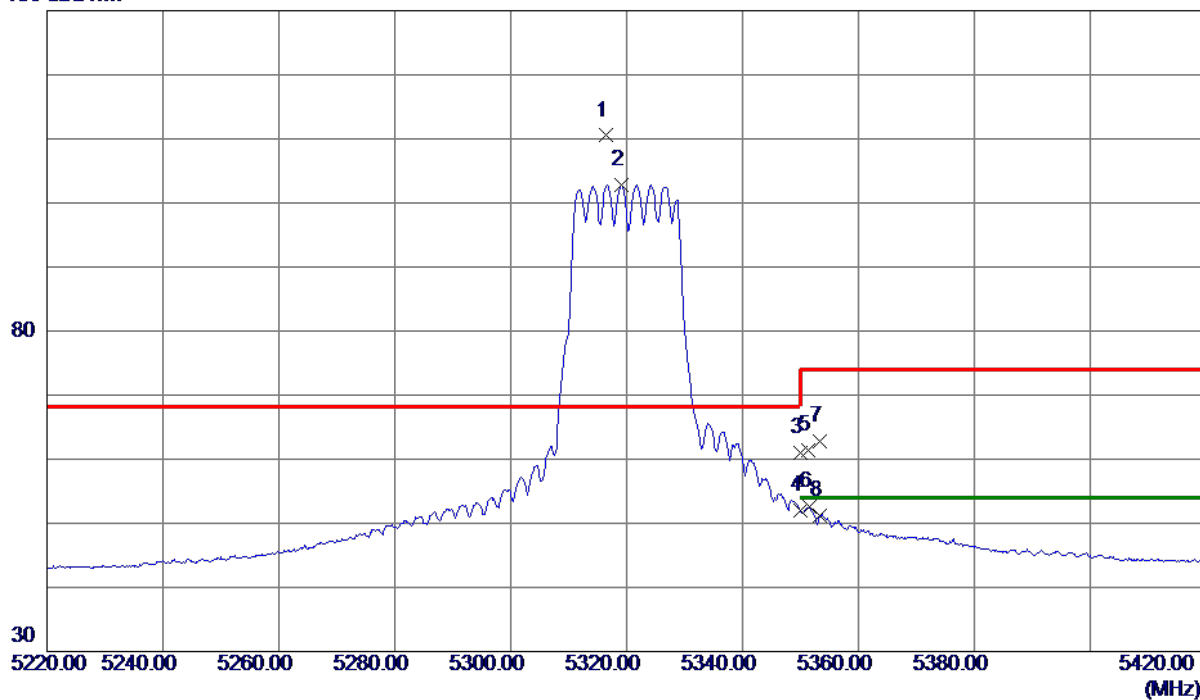

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5316.5000	95.79	14.71	110.50	68.30	42.20	Peak	No Limit
2	5319.1000	88.09	14.72	102.81	999.00	-896.19	AVG	No Limit
3	5350.0000	46.14	14.79	60.93	74.00	-13.07	Peak	
4	5350.0000	37.12	14.79	51.91	54.00	-2.09	AVG	
5	5351.4000	46.65	14.79	61.44	74.00	-12.56	Peak	
6	5351.6000	37.77	14.79	52.56	54.00	-1.44	AVG	
7	5353.4000	47.95	14.80	62.75	74.00	-11.25	Peak	
8	5353.4000	36.39	14.80	51.19	54.00	-2.81	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz

Horizontal

80 dBuV/m

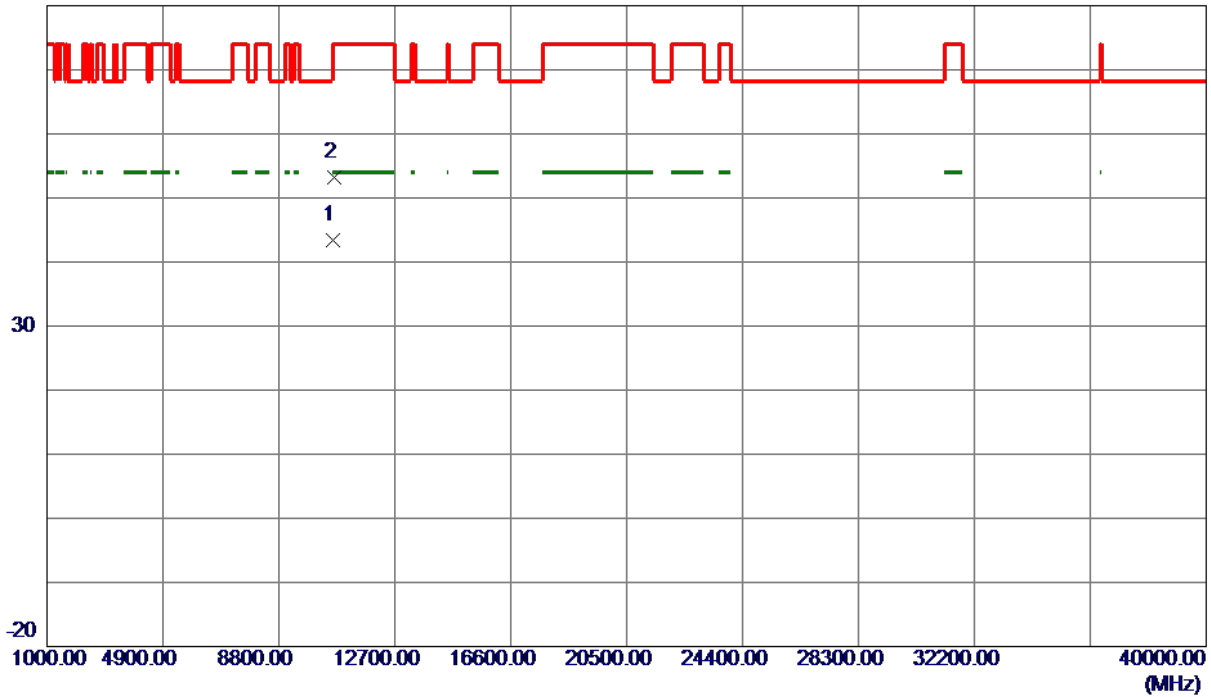

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10641.3000	31.75	11.56	43.31	54.00	-10.69	AVG	
2	10641.7000	41.62	11.56	53.18	74.00	-20.82	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5270 MHz

Vertical

130 dBuV/m

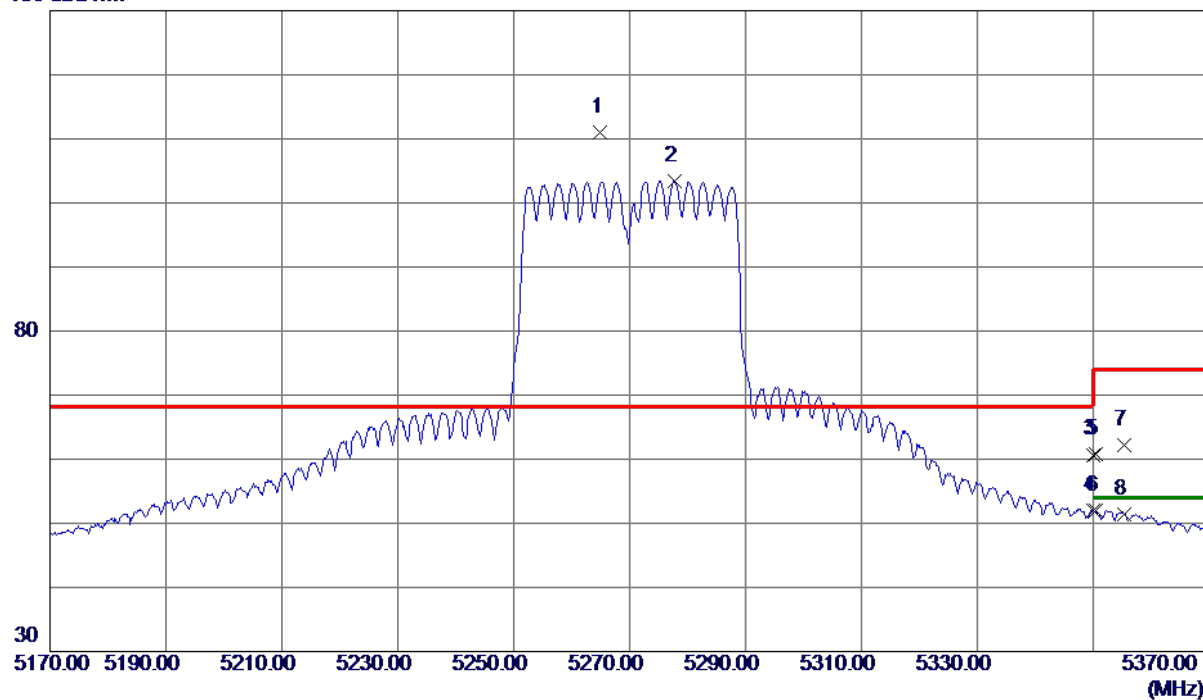


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5265.0000	96.50	14.59	111.09	68.30	42.79	Peak	No Limit
2	5277.7000	88.85	14.62	103.47	999.00	-895.53	AVG	No Limit
3	5350.0000	45.91	14.79	60.70	74.00	-13.30	Peak	
4	5350.0000	37.17	14.79	51.96	54.00	-2.04	AVG	
5	5350.5000	46.03	14.79	60.82	74.00	-13.18	Peak	
6	5350.5000	37.23	14.79	52.02	54.00	-1.98	AVG	
7	5355.4000	47.45	14.80	62.25	74.00	-11.75	Peak	
8	5355.4000	36.53	14.80	51.33	54.00	-2.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5270 MHz

Vertical

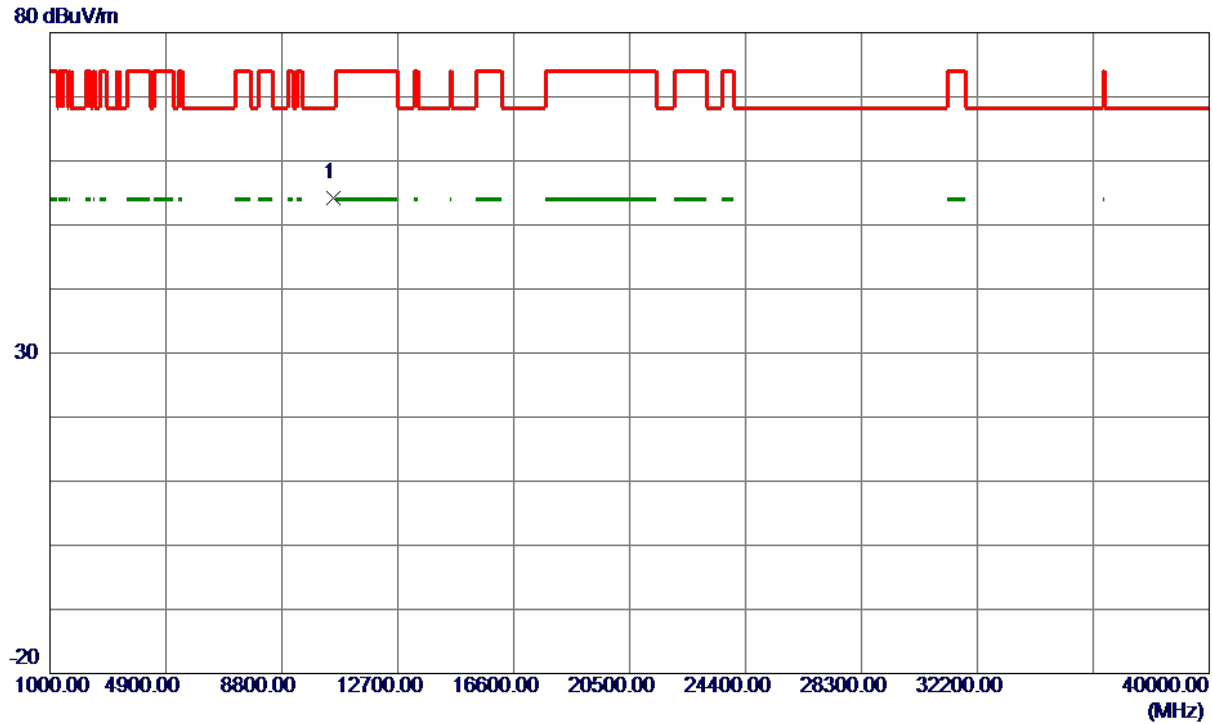

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10541.8000	42.69	11.54	54.23	68.30	-14.07	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5270 MHz

Horizontal

130 dBuV/m

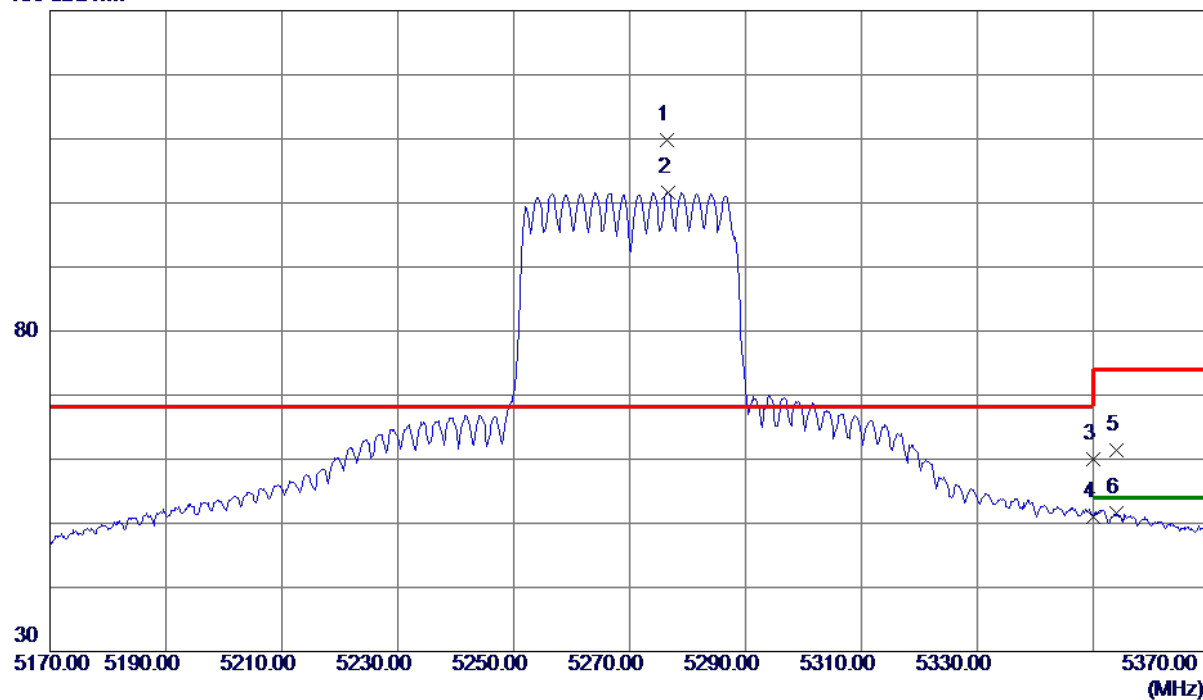


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5276.4000	95.14	14.62	109.76	68.30	41.46	Peak	No Limit
2	5276.7000	86.98	14.62	101.60	999.00	-897.40	AVG	No Limit
3	5350.0000	45.20	14.79	59.99	74.00	-14.01	Peak	
4	5350.0000	36.29	14.79	51.08	54.00	-2.92	AVG	
5	5354.0000	46.60	14.80	61.40	74.00	-12.60	Peak	
6	5354.0000	36.85	14.80	51.65	54.00	-2.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5270 MHz

Horizontal

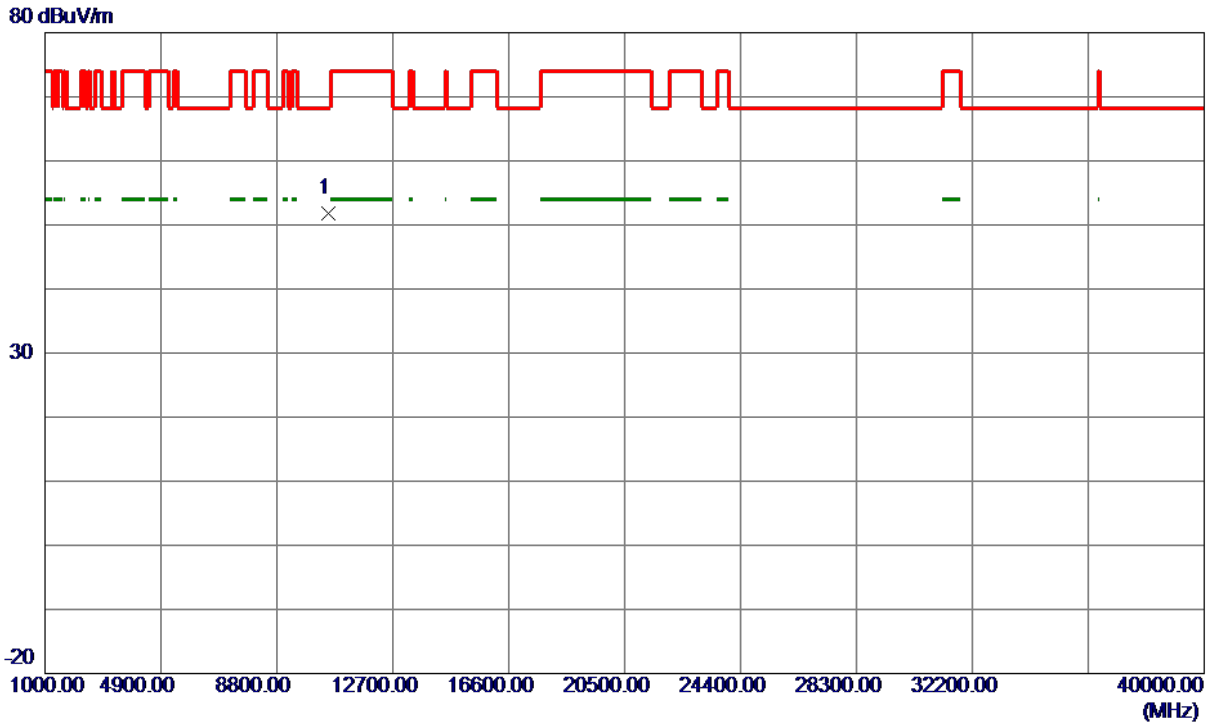

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10539.2000	40.30	11.54	51.84	68.30	-16.46	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz

Vertical

130 dBuV/m

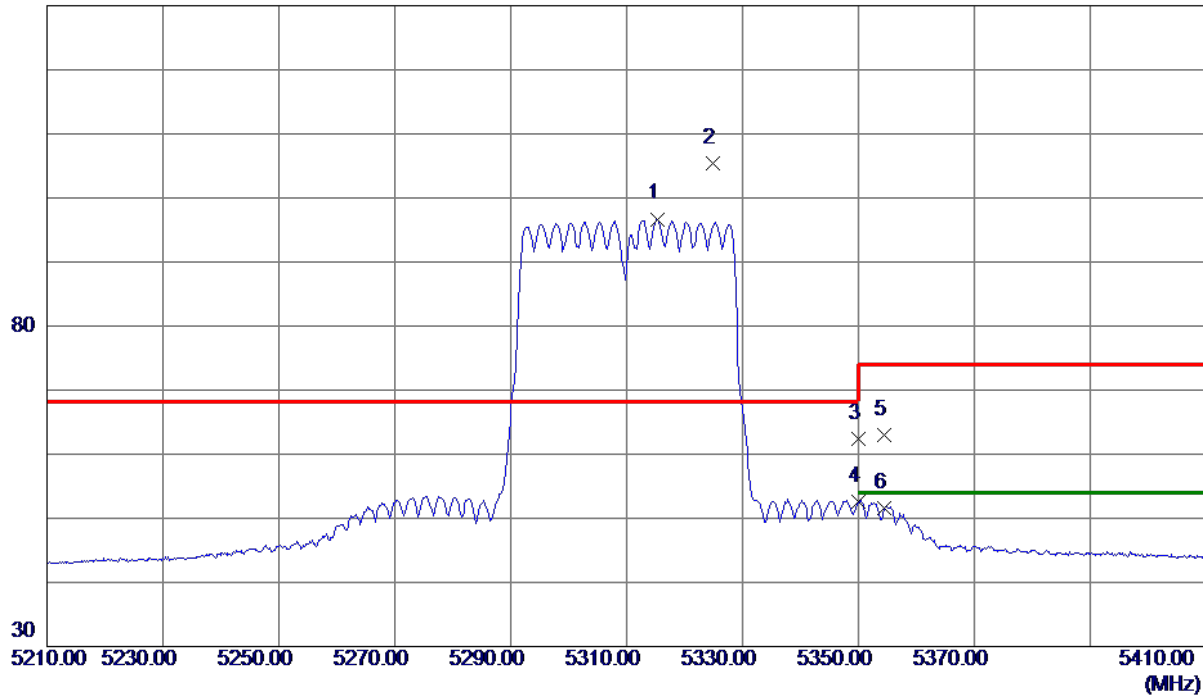

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5315.4000	81.99	14.71	96.70	999.00	-902.30	AVG	No Limit
2 *	5324.9000	90.64	14.73	105.37	68.30	37.07	Peak	No Limit
3	5350.0000	47.55	14.79	62.34	74.00	-11.66	Peak	
4	5350.0000	37.73	14.79	52.52	54.00	-1.48	AVG	
5	5354.4000	48.27	14.80	63.07	74.00	-10.93	Peak	
6	5354.4000	36.87	14.80	51.67	54.00	-2.33	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz

Vertical

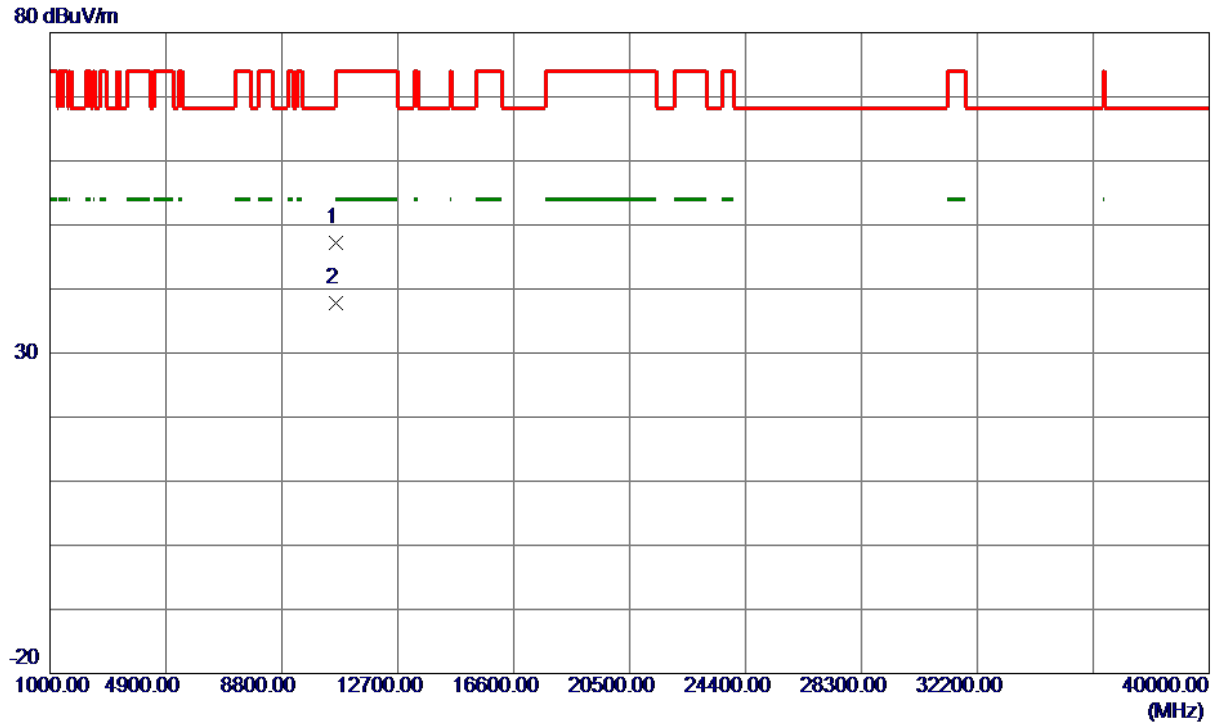

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10616.4500	35.69	11.55	47.24	74.00	-26.76	Peak	
2 *	10623.9500	26.33	11.56	37.89	54.00	-16.11	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz

Horizontal

130 dBuV/m

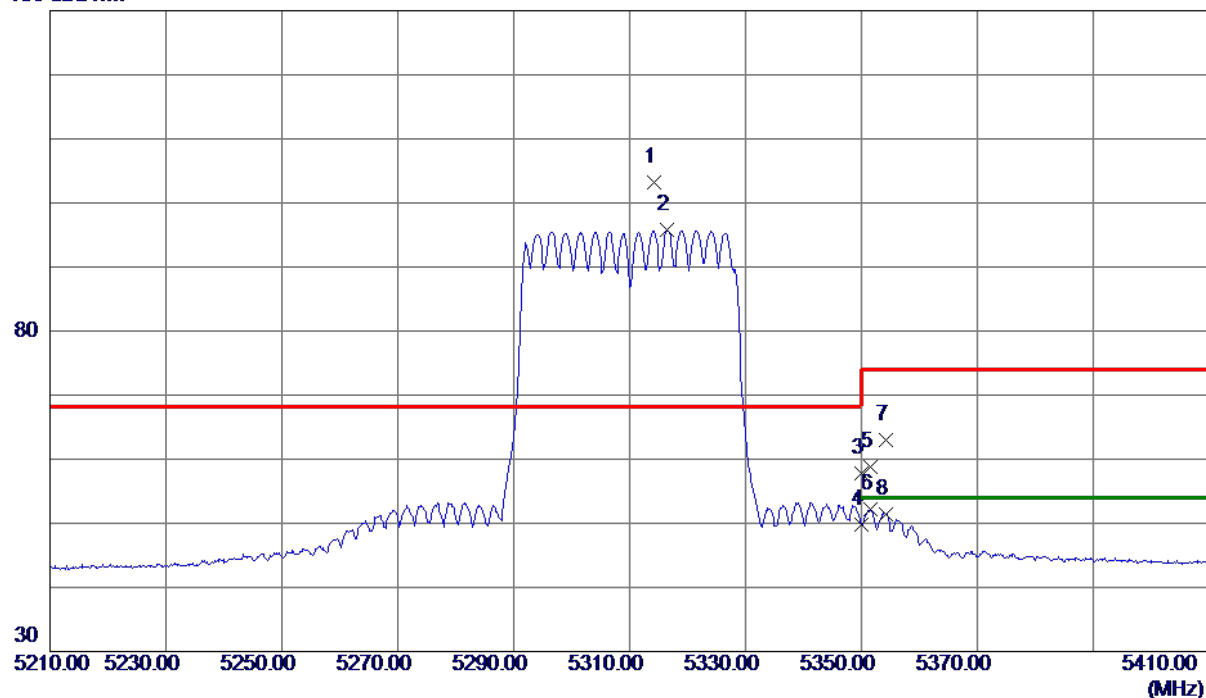

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5314.3000	88.42	14.70	103.12	68.30	34.82	Peak	No Limit
2	5316.5000	81.08	14.71	95.79	999.00	-903.21	AVG	No Limit
3	5350.0000	42.97	14.79	57.76	74.00	-16.24	Peak	
4	5350.0000	35.07	14.79	49.86	54.00	-4.14	AVG	
5	5351.5000	43.98	14.79	58.77	74.00	-15.23	Peak	
6	5351.6000	37.47	14.79	52.26	54.00	-1.74	AVG	
7	5354.3000	48.14	14.80	62.94	74.00	-11.06	Peak	
8	5354.3000	36.63	14.80	51.43	54.00	-2.57	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz

Horizontal

80 dBuV/m

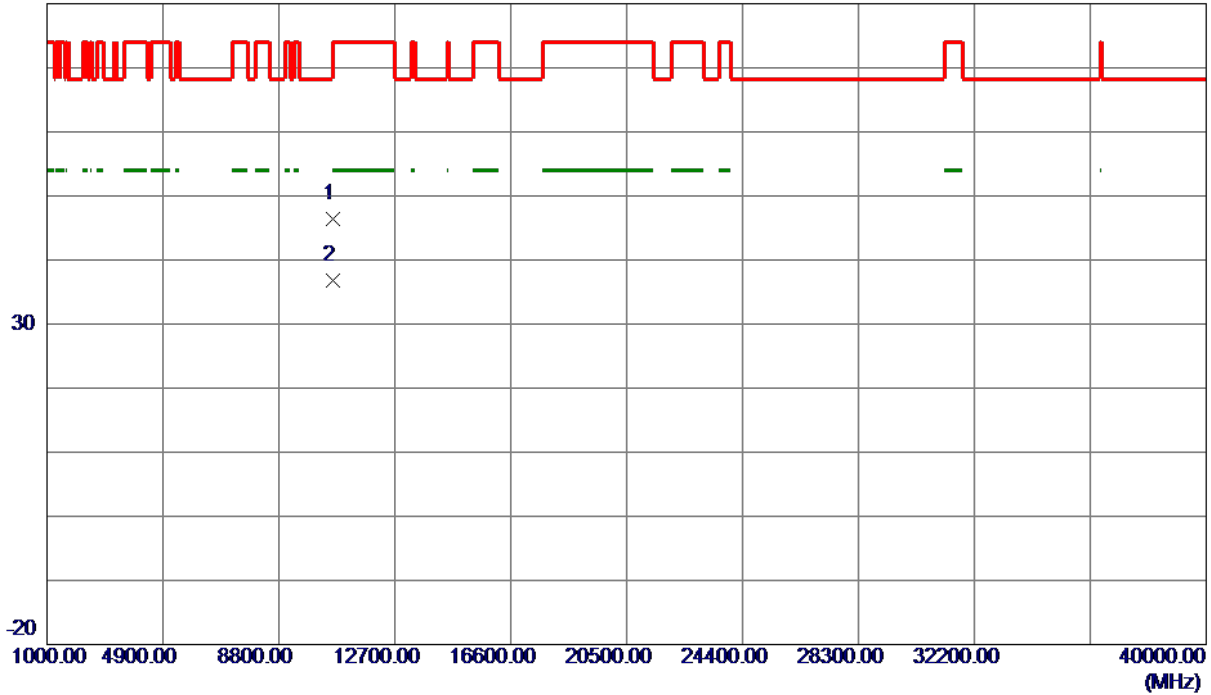

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10611.5500	34.86	11.55	46.41	74.00	-27.59	Peak	
2 *	10618.9000	25.26	11.56	36.82	54.00	-17.18	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz

Vertical

130 dBuV/m

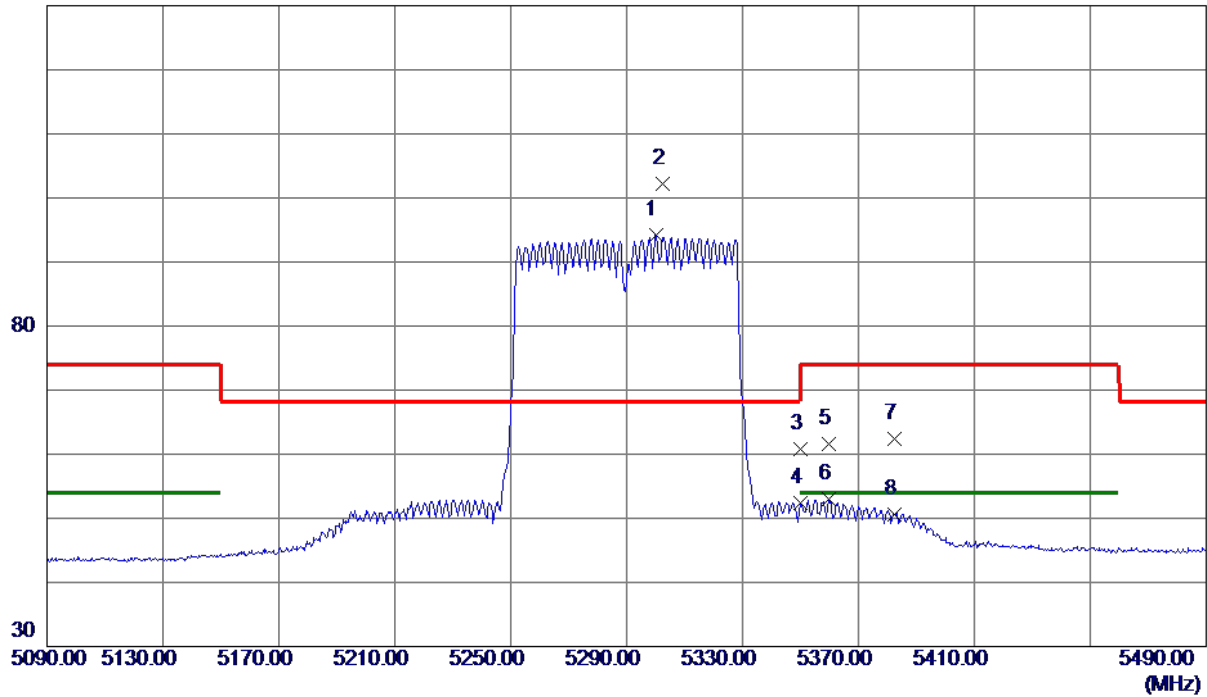


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5300.0000	79.59	14.67	94.26	999.00	-904.74	AVG	No Limit
2 *	5302.6000	87.50	14.68	102.18	68.30	33.88	Peak	No Limit
3	5350.0000	46.00	14.79	60.79	74.00	-13.21	Peak	
4	5350.0000	37.66	14.79	52.45	54.00	-1.55	AVG	
5	5359.8000	46.85	14.81	61.66	74.00	-12.34	Peak	
6	5359.8000	38.10	14.81	52.91	54.00	-1.09	AVG	
7	5382.4000	47.56	14.87	62.43	74.00	-11.57	Peak	
8	5382.4000	35.82	14.87	50.69	54.00	-3.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz

Vertical

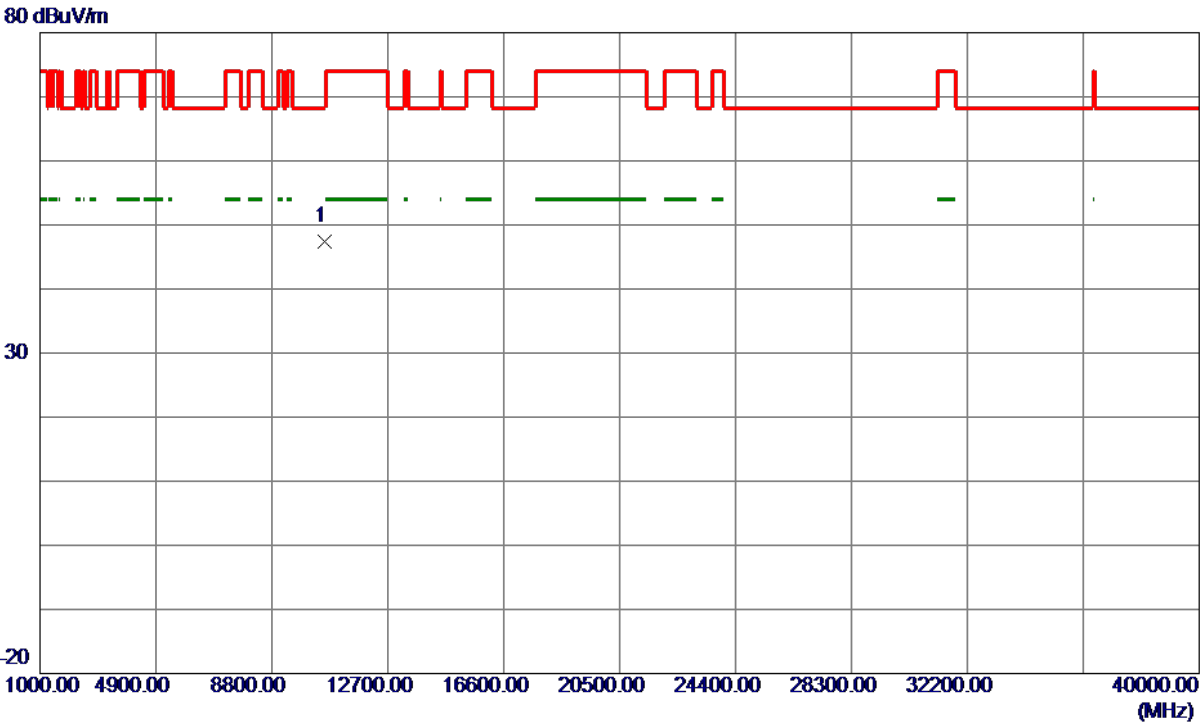


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10587.1300	35.83	11.55	47.38	68.30	-20.92	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz

Horizontal

130 dBuV/m

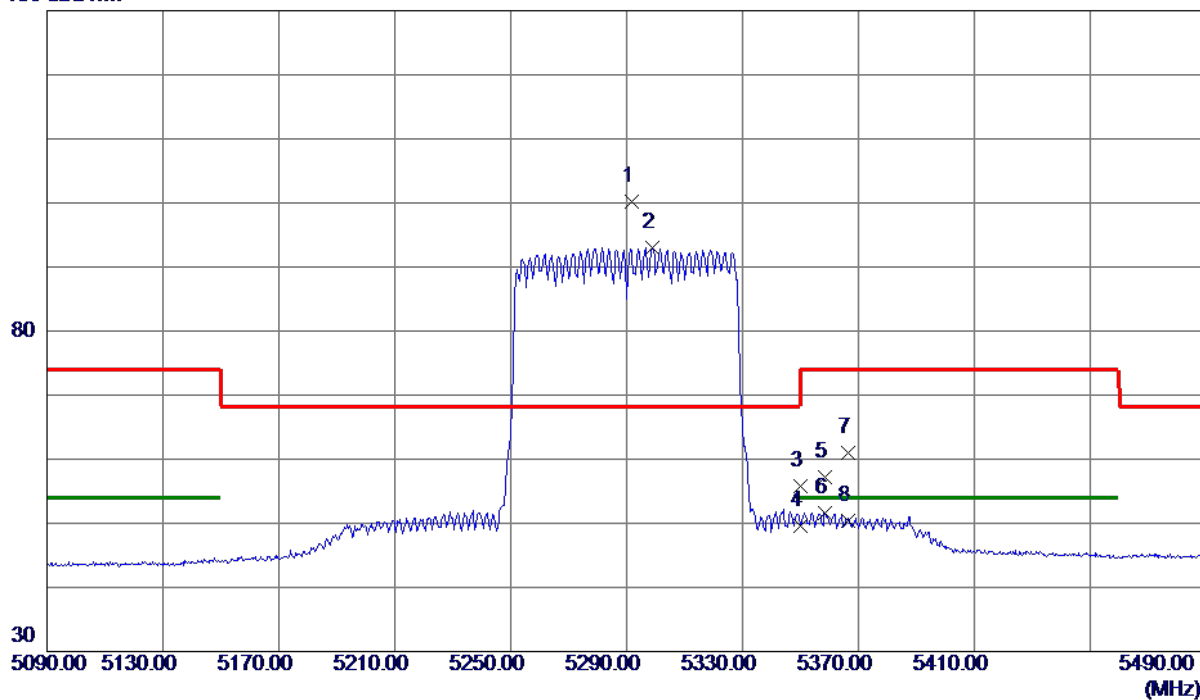


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5291.8000	85.57	14.65	100.22	68.30	31.92	Peak	No Limit
2	5299.0000	78.36	14.67	93.03	999.00	-905.97	AVG	No Limit
3	5350.0000	41.07	14.79	55.86	74.00	-18.14	Peak	
4	5350.0000	34.80	14.79	49.59	54.00	-4.41	AVG	
5	5358.4000	42.38	14.81	57.19	74.00	-16.81	Peak	
6	5358.4000	36.83	14.81	51.64	54.00	-2.36	AVG	
7	5366.6000	46.23	14.83	61.06	74.00	-12.94	Peak	
8	5366.6000	35.48	14.83	50.31	54.00	-3.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz

Horizontal

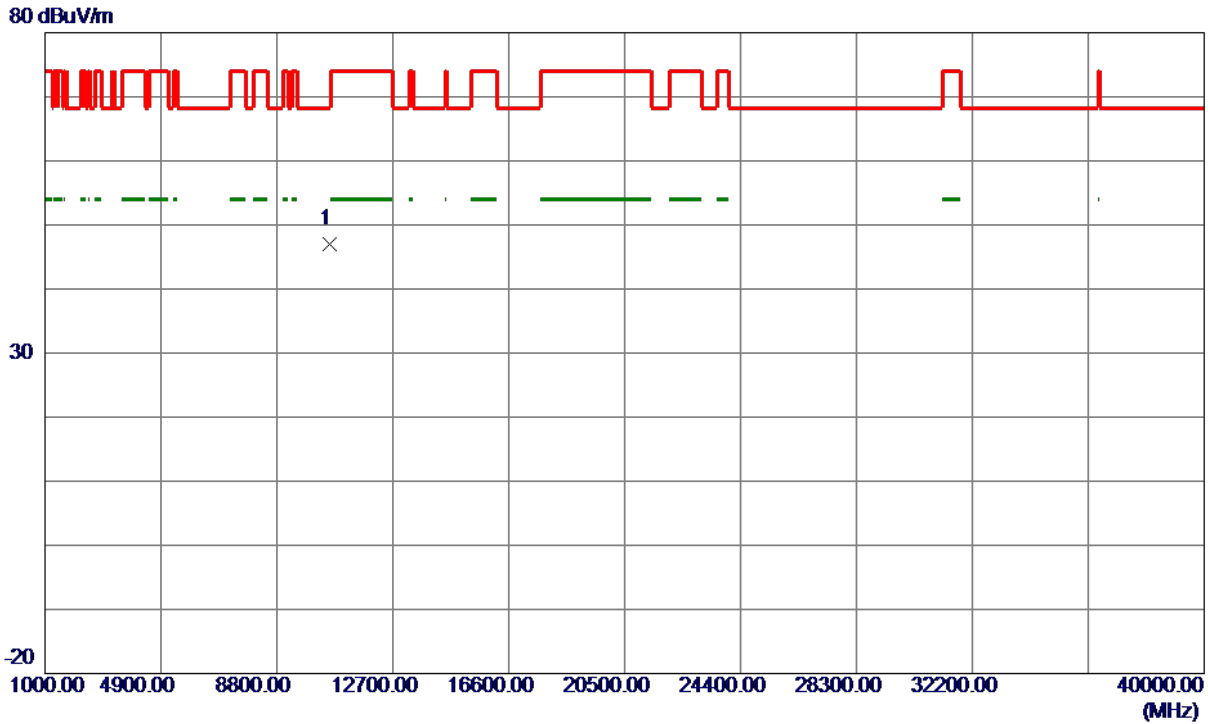


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10579.3200	35.46	11.55	47.01	68.30	-21.29	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz

Vertical

130 dBuV/m

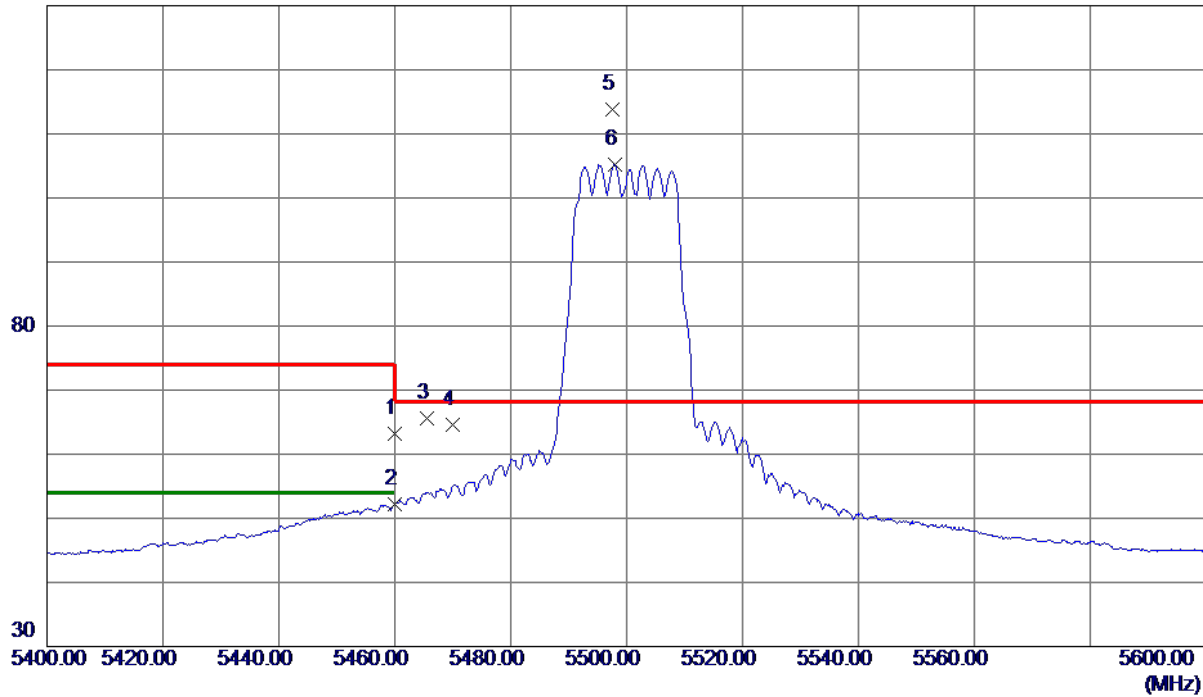


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	48.19	15.05	63.24	74.00	-10.76	Peak	
2	5460.0000	37.16	15.05	52.21	54.00	-1.79	AVG	
3	5465.6000	50.56	15.06	65.62	68.30	-2.68	Peak	
4	5470.0000	49.50	15.07	64.57	68.30	-3.73	Peak	
5 *	5497.6000	98.60	15.14	113.74	68.30	45.44	Peak	No Limit
6	5497.9000	90.05	15.14	105.19	999.00	-893.81	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz

Vertical

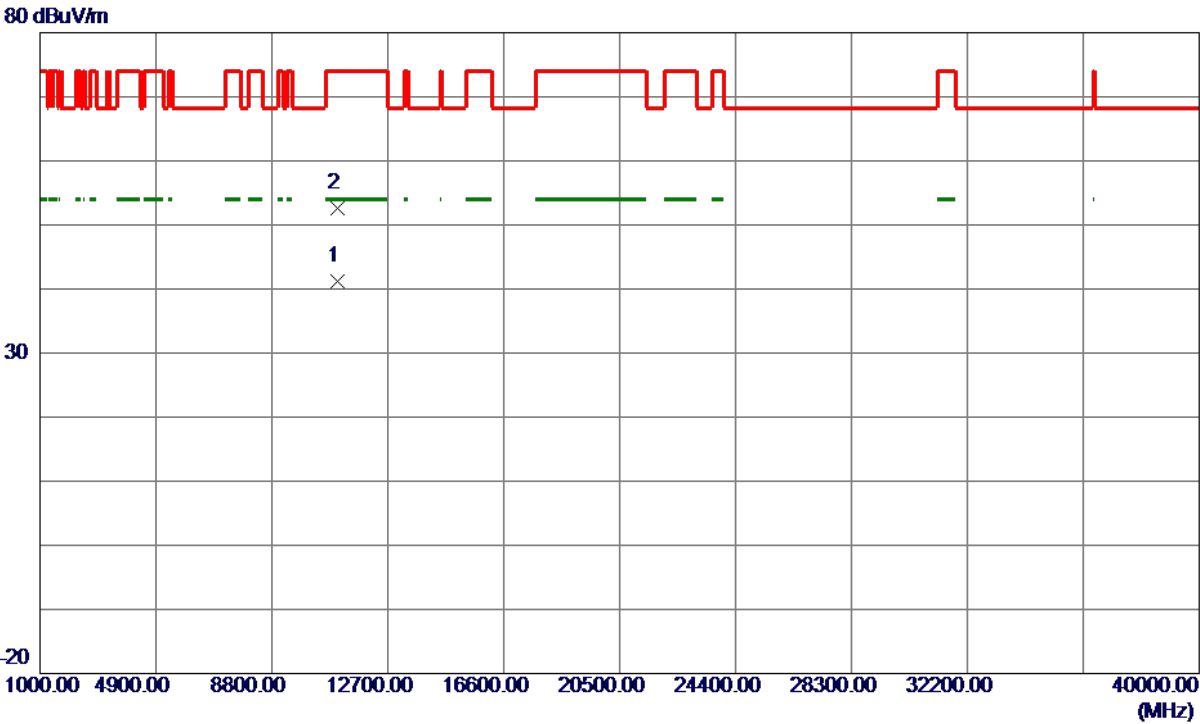

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10998.9400	29.58	11.62	41.20	54.00	-12.80	AVG	
2	11001.6000	41.03	11.62	52.65	74.00	-21.35	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz

Horizontal

130 dBuV/m

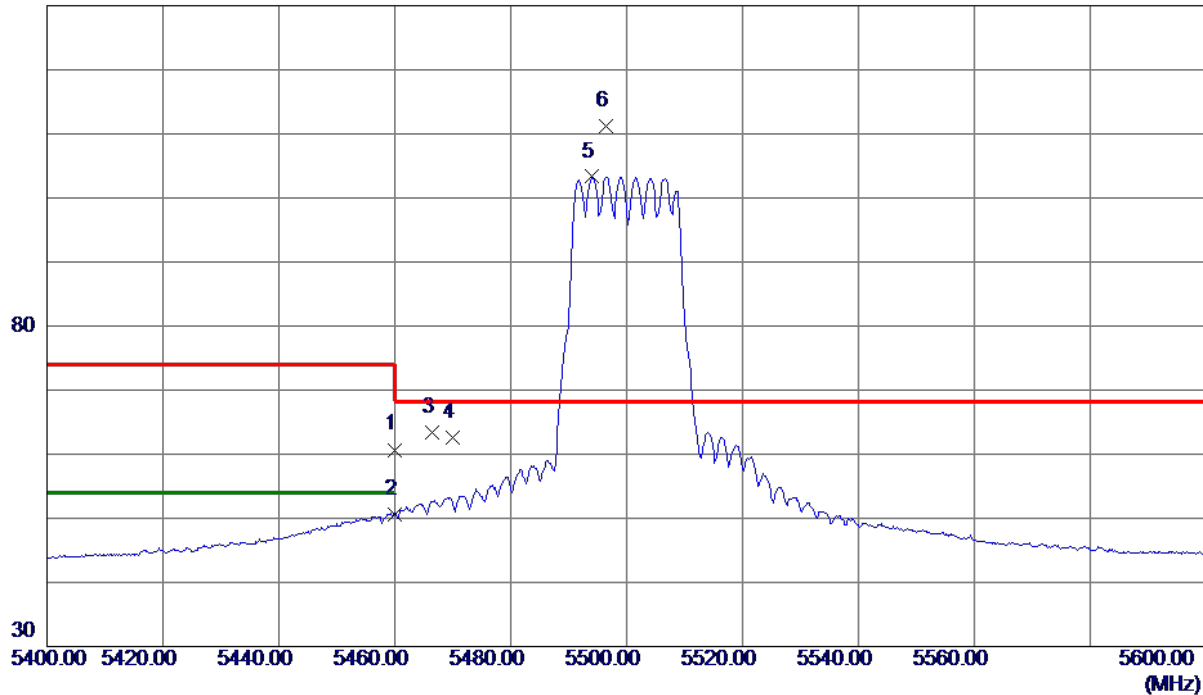

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	45.65	15.05	60.70	74.00	-13.30	Peak	
2	5460.0000	35.59	15.05	50.64	54.00	-3.36	AVG	
3	5466.5000	48.42	15.07	63.49	68.30	-4.81	Peak	
4	5470.0000	47.48	15.07	62.55	68.30	-5.75	Peak	
5	5494.1000	88.17	15.13	103.30	999.00	-895.70	AVG	No Limit
6 *	5496.4000	96.10	15.14	111.24	68.30	42.94	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz

Horizontal

80 dBuV/m

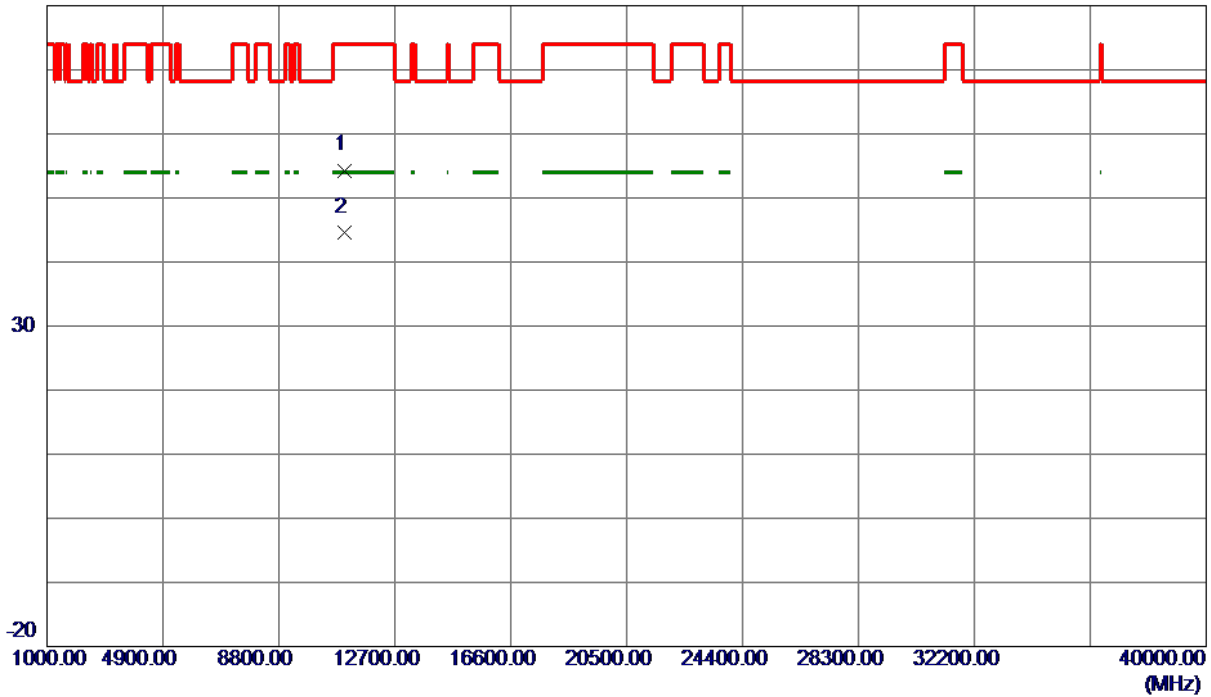


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10994.2000	42.68	11.62	54.30	74.00	-19.70	Peak	
2 *	10999.1000	32.99	11.62	44.61	54.00	-9.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5580 MHz

Vertical

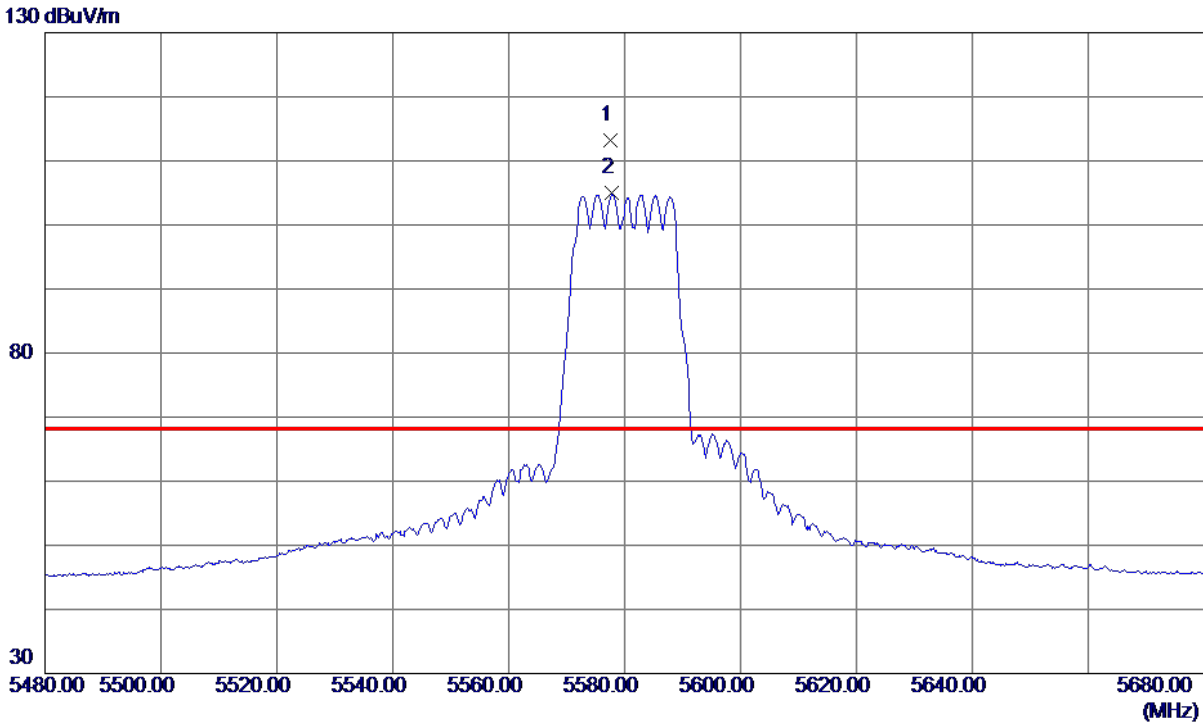


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5577.6000	97.80	15.33	113.13	68.30	44.83	Peak	No Limit
2	5577.8000	89.58	15.33	104.91	999.00	-894.09	AVG	No Limit

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5580 MHz

Vertical

80 dBuV/m

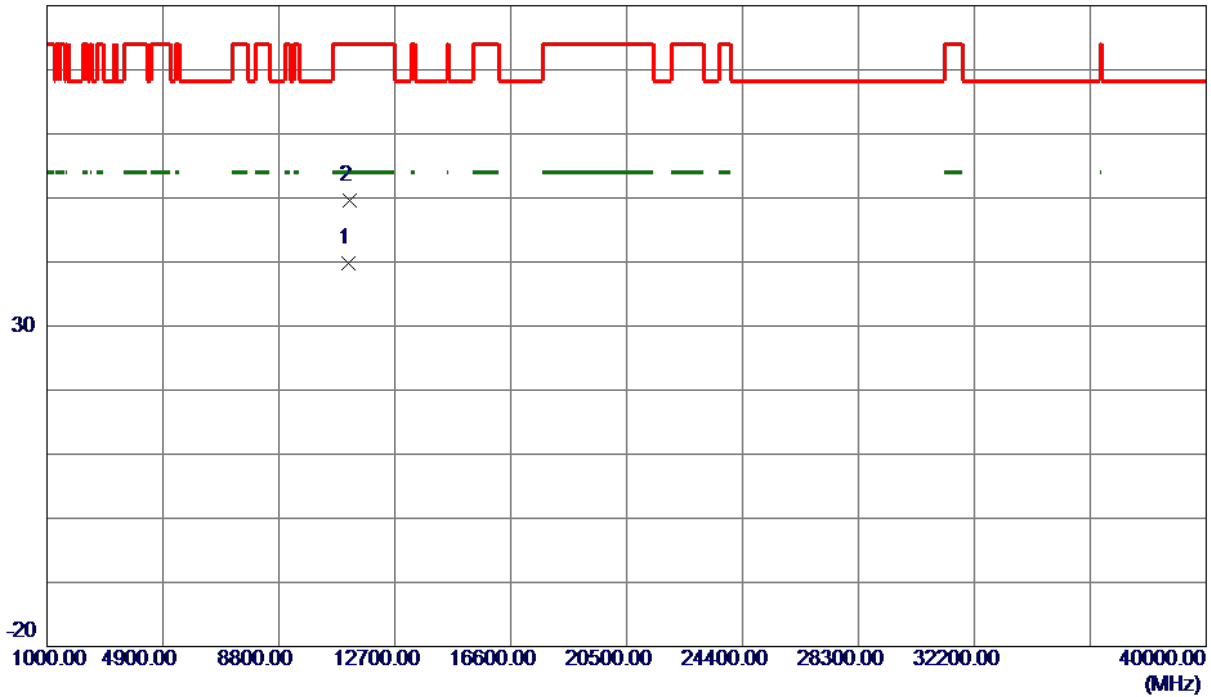

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11158.6000	28.11	11.76	39.87	54.00	-14.13	AVG	
2	11163.4600	37.86	11.77	49.63	74.00	-24.37	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5580 MHz

Horizontal

130 dBuV/m

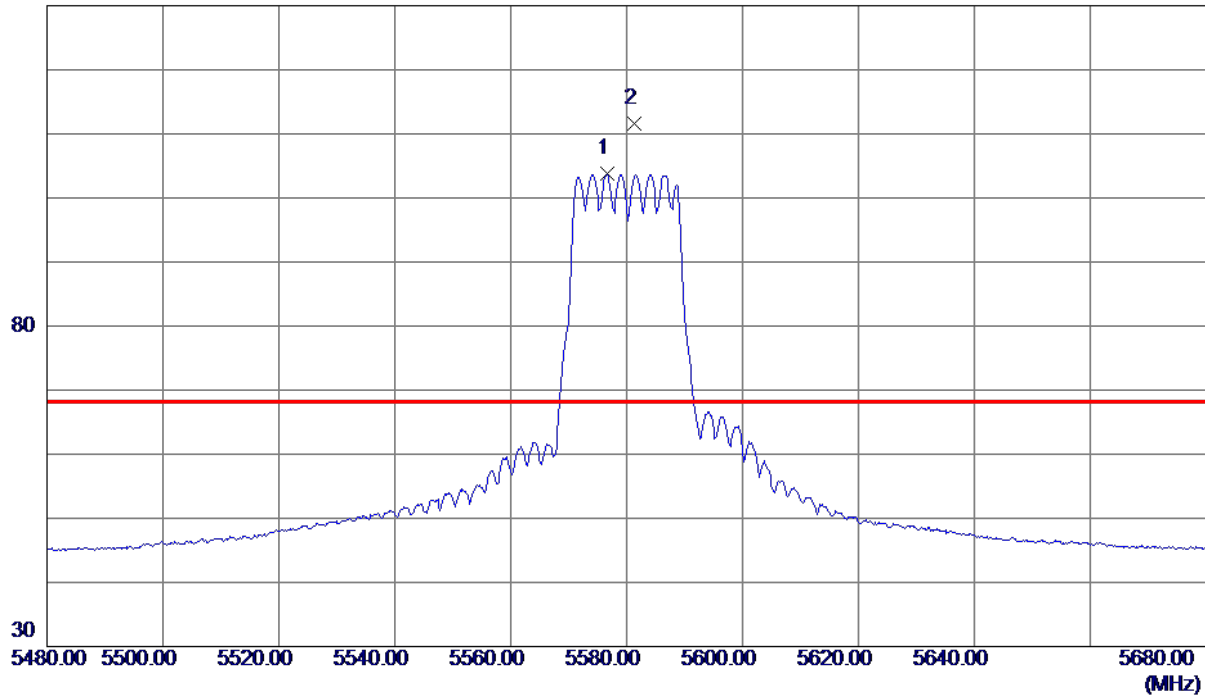

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5576.7000	88.38	15.33	103.71	999.00	-895.29	AVG	No Limit
2 *	5581.3000	96.20	15.34	111.54	68.30	43.24	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5580 MHz

Horizontal

80 dBuV/m

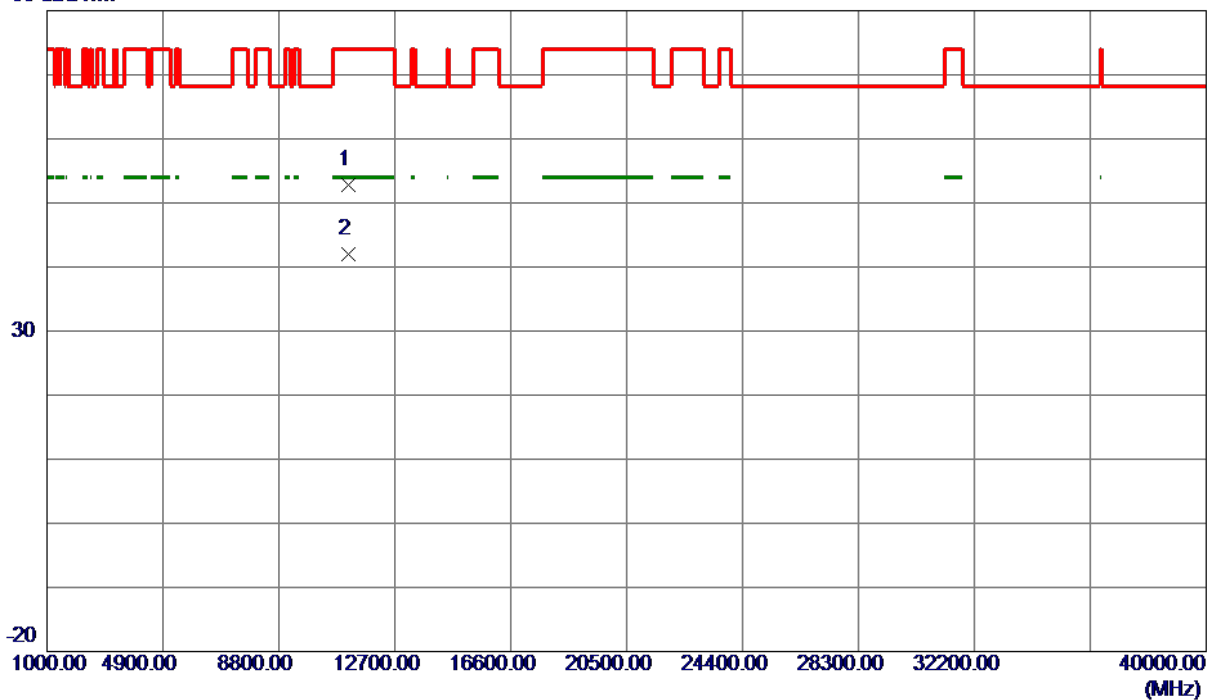

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11157.0000	40.97	11.76	52.73	74.00	-21.27	Peak	
2 *	11158.7800	30.18	11.76	41.94	54.00	-12.06	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5700 MHz

Vertical

130 dBuV/m

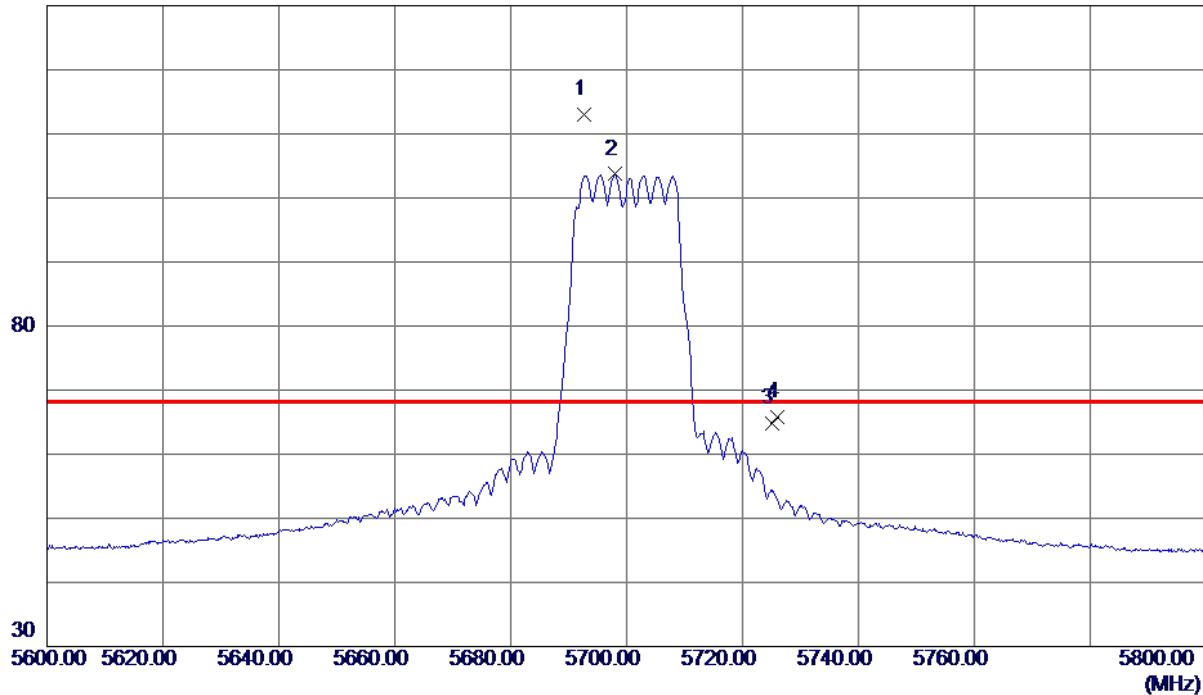


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5692.6000	97.45	15.60	113.05	68.30	44.75	Peak	No Limit
2	5697.9000	88.09	15.61	103.70	999.00	-895.30	AVG	No Limit
3	5725.0000	49.17	15.68	64.85	68.30	-3.45	Peak	
4	5726.0000	50.21	15.68	65.89	68.30	-2.41	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5700 MHz

Vertical

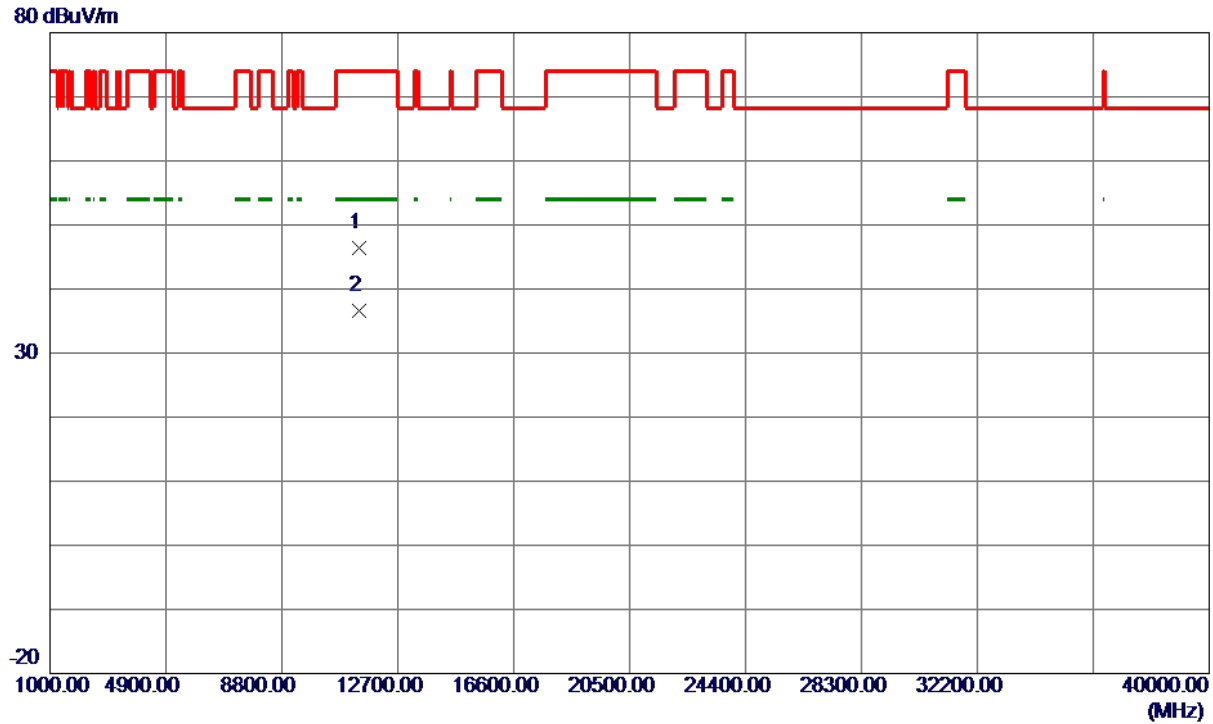

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11393.0800	34.40	11.98	46.38	74.00	-27.62	Peak	
2 *	11403.8000	24.63	11.99	36.62	54.00	-17.38	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5700 MHz

Horizontal

130 dBuV/m

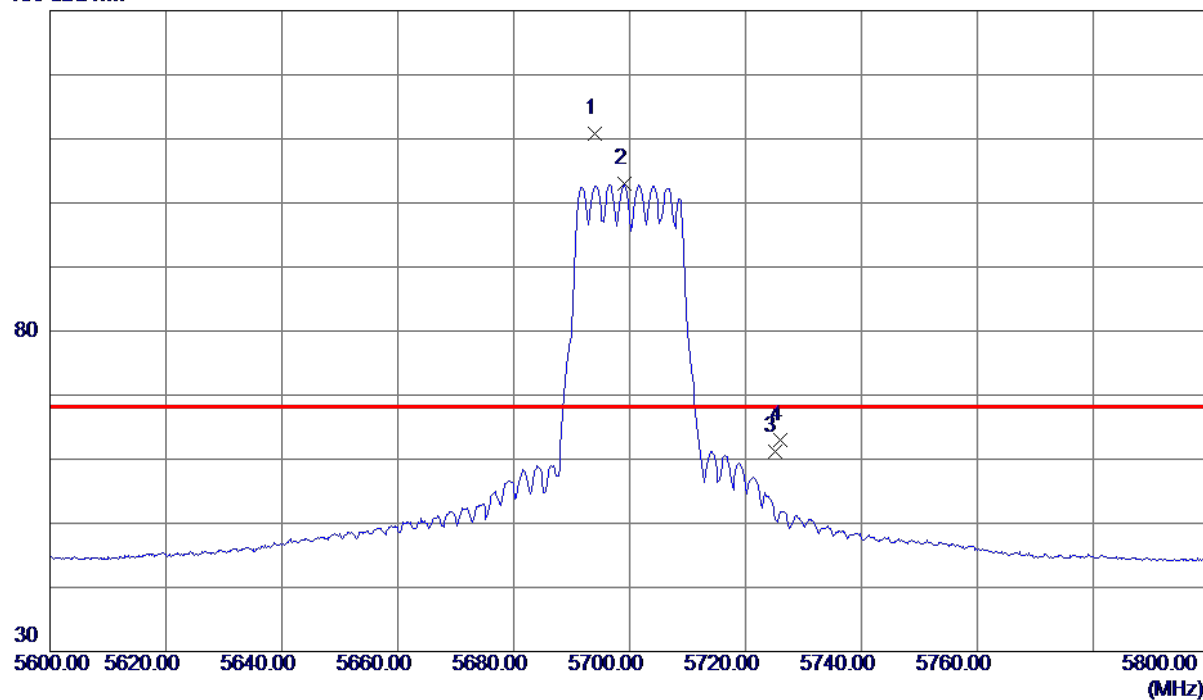

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5693.9000	95.16	15.60	110.76	68.30	42.46	Peak	No Limit
2	5699.1000	87.29	15.62	102.91	999.00	-896.09	AVG	No Limit
3	5725.0000	45.60	15.68	61.28	68.30	-7.02	Peak	
4	5726.0000	47.26	15.68	62.94	68.30	-5.36	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5700 MHz

Horizontal

80 dBuV/m

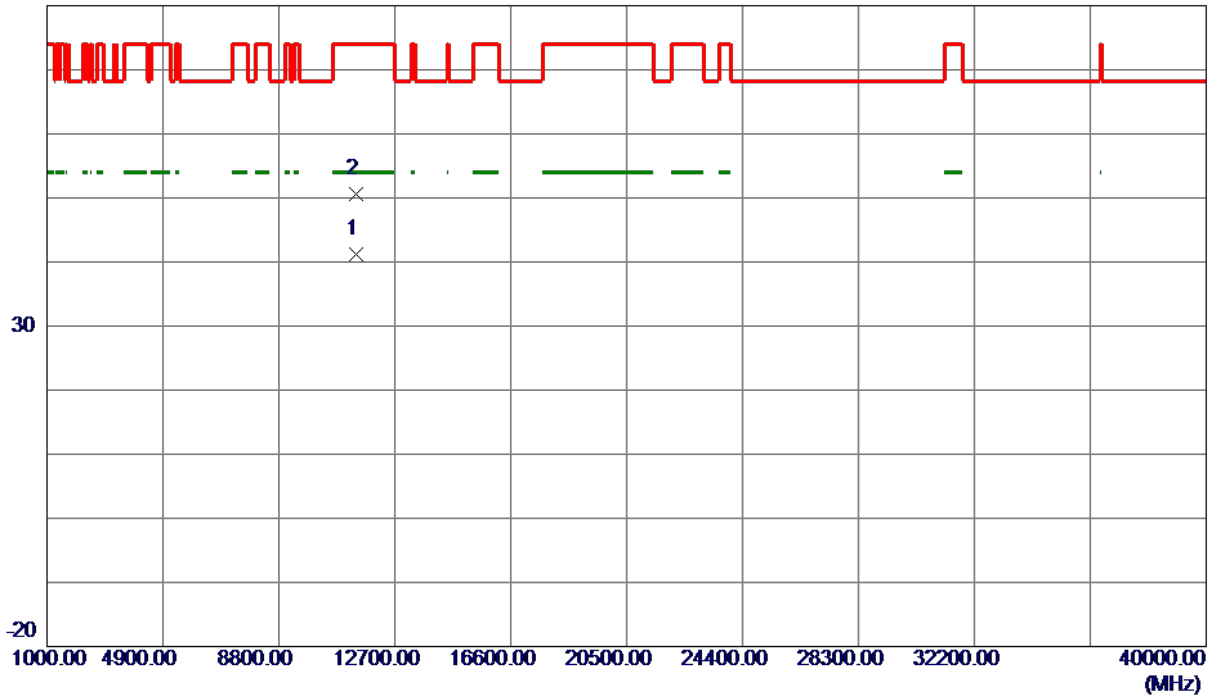

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11396.4600	29.13	11.98	41.11	54.00	-12.89	AVG	
2	11401.1000	38.60	11.98	50.58	74.00	-23.42	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz

Vertical

130 dBuV/m

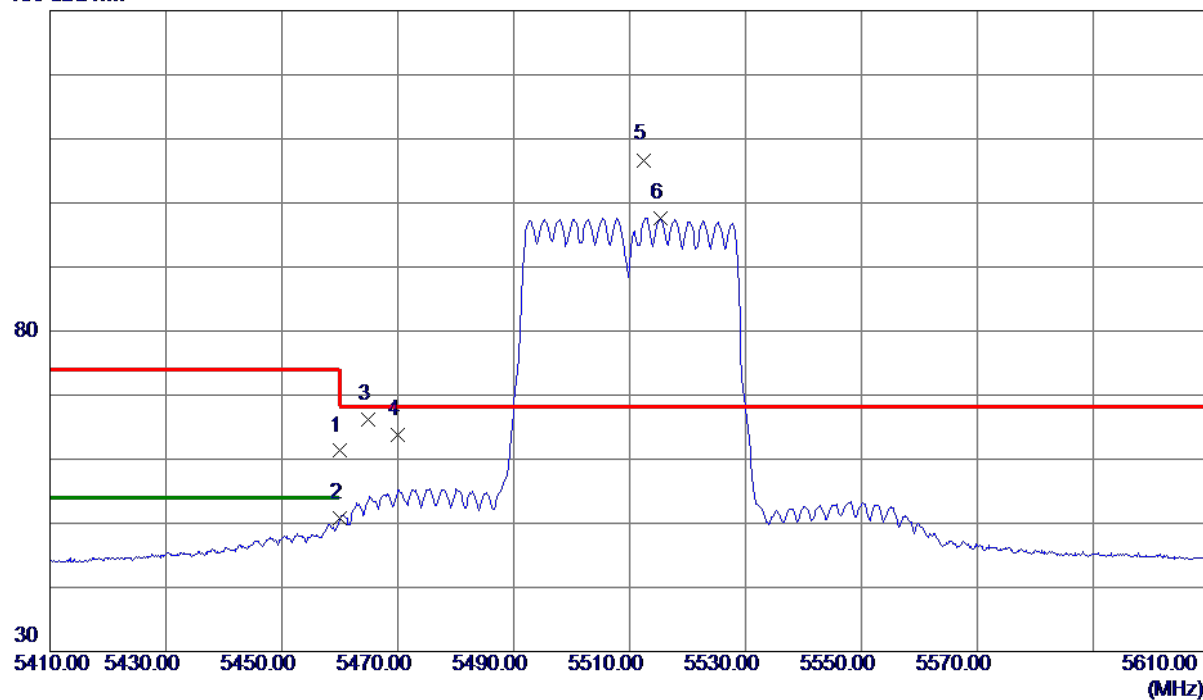

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	46.25	15.05	61.30	74.00	-12.70	Peak	
2	5460.0000	35.80	15.05	50.85	54.00	-3.15	AVG	
3	5464.8000	51.16	15.06	66.22	68.30	-2.08	Peak	
4	5470.0000	48.73	15.07	63.80	68.30	-4.50	Peak	
5 *	5512.5000	91.53	15.17	106.70	68.30	38.40	Peak	No Limit
6	5515.3000	82.51	15.18	97.69	999.00	-901.31	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz

Vertical

80 dBuV/m

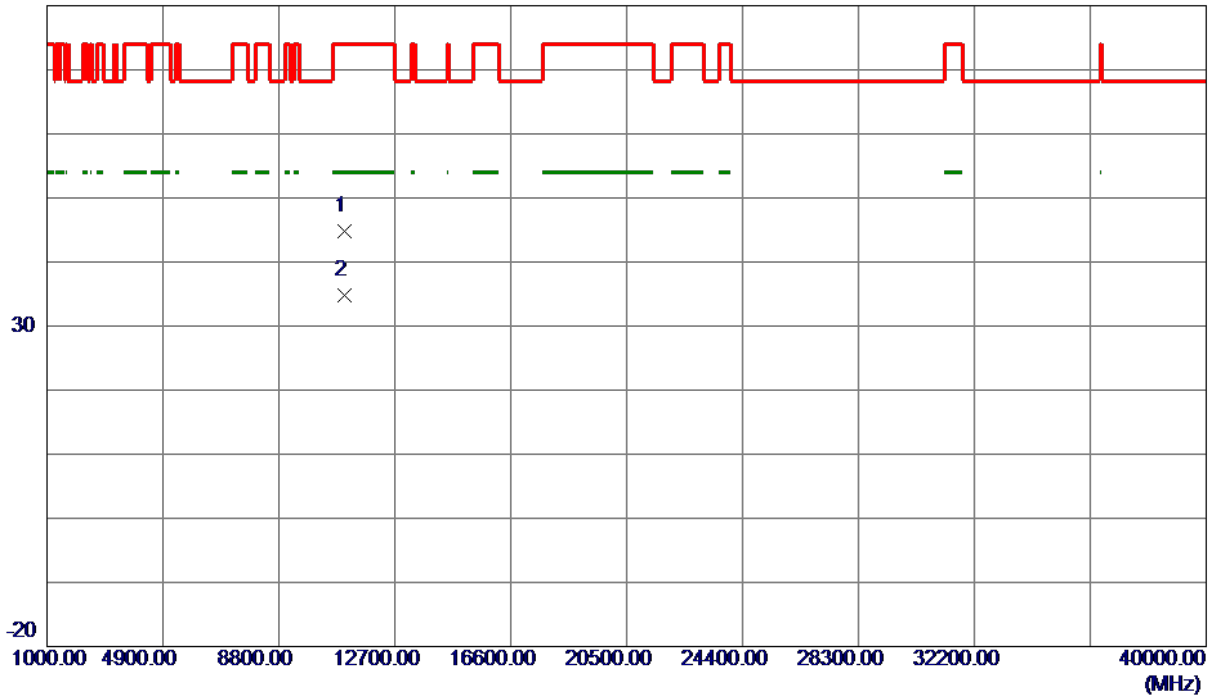

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11005.0000	33.16	11.62	44.78	74.00	-29.22	Peak	
2 *	11015.9750	23.09	11.63	34.72	54.00	-19.28	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz

Horizontal

130 dBuV/m

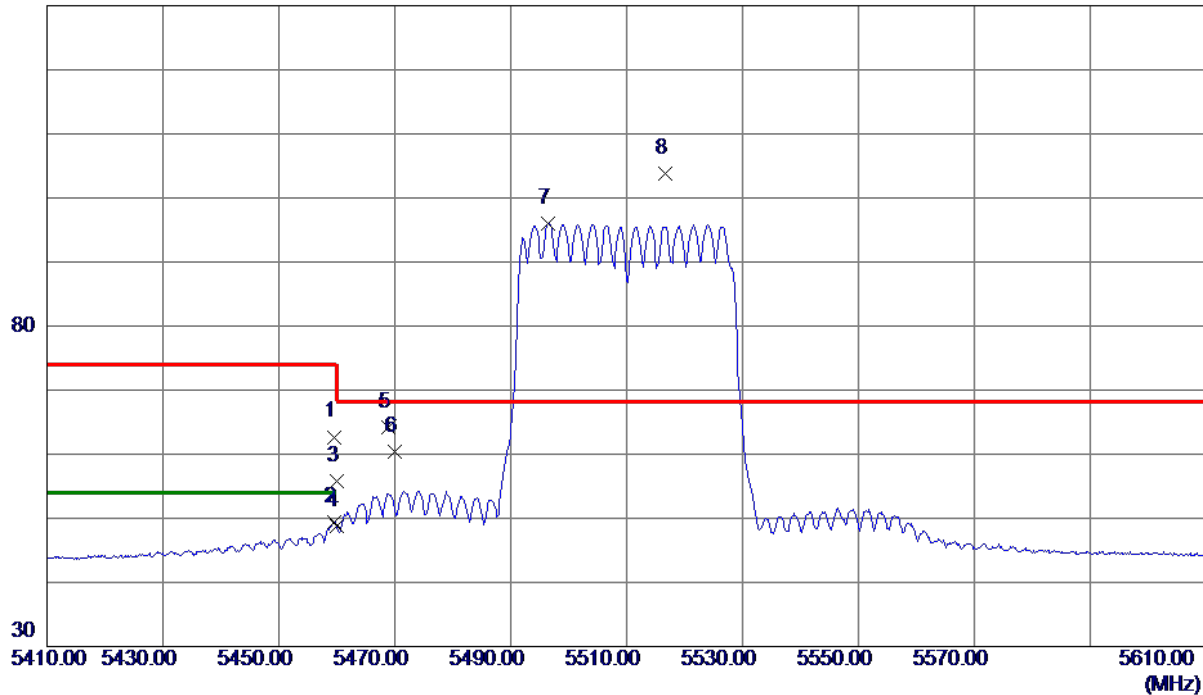

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.5000	47.65	15.05	62.70	74.00	-11.30	Peak	
2	5459.5000	34.29	15.05	49.34	54.00	-4.66	AVG	
3	5460.0000	40.80	15.05	55.85	74.00	-18.15	Peak	
4	5460.0000	33.68	15.05	48.73	54.00	-5.27	AVG	
5	5468.8000	49.05	15.07	64.12	68.30	-4.18	Peak	
6	5470.0000	45.32	15.07	60.39	68.30	-7.91	Peak	
7	5496.5000	80.85	15.14	95.99	999.00	-903.01	AVG	No Limit
8 *	5516.7000	88.69	15.18	103.87	68.30	35.57	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz

Horizontal

80 dBuV/m

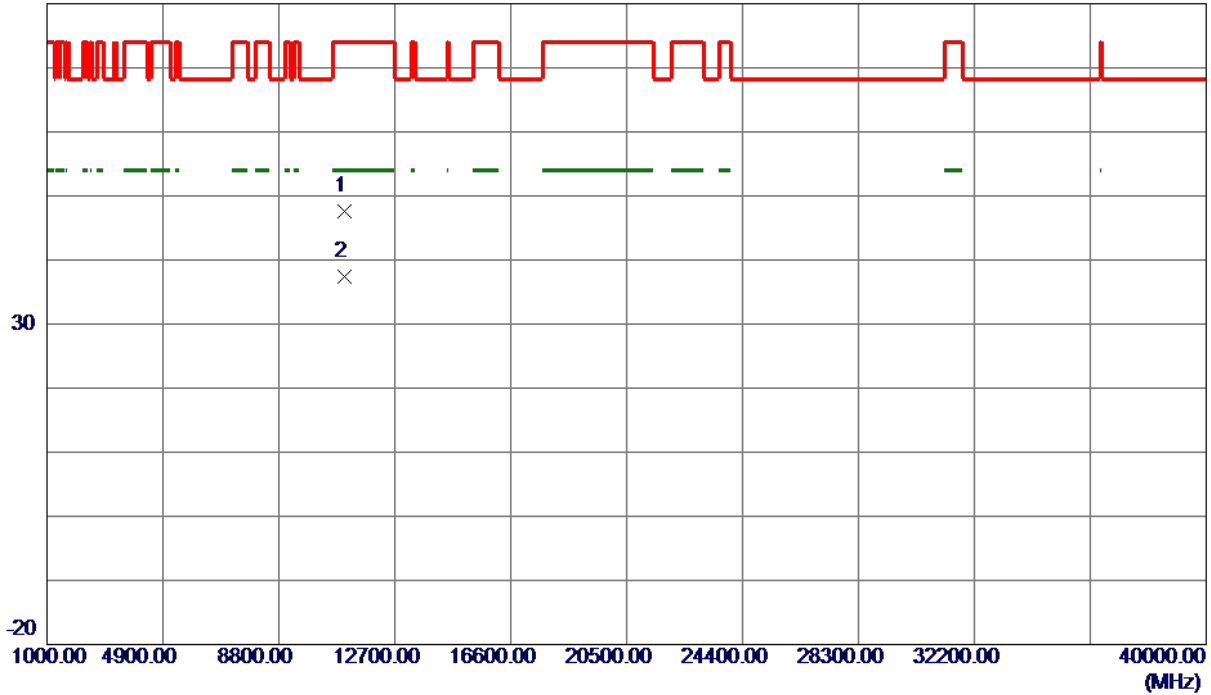

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11016.4250	36.02	11.63	47.65	74.00	-26.35	Peak	
2 *	11019.1250	25.77	11.64	37.41	54.00	-16.59	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5550 MHz

Vertical

130 dBuV/m

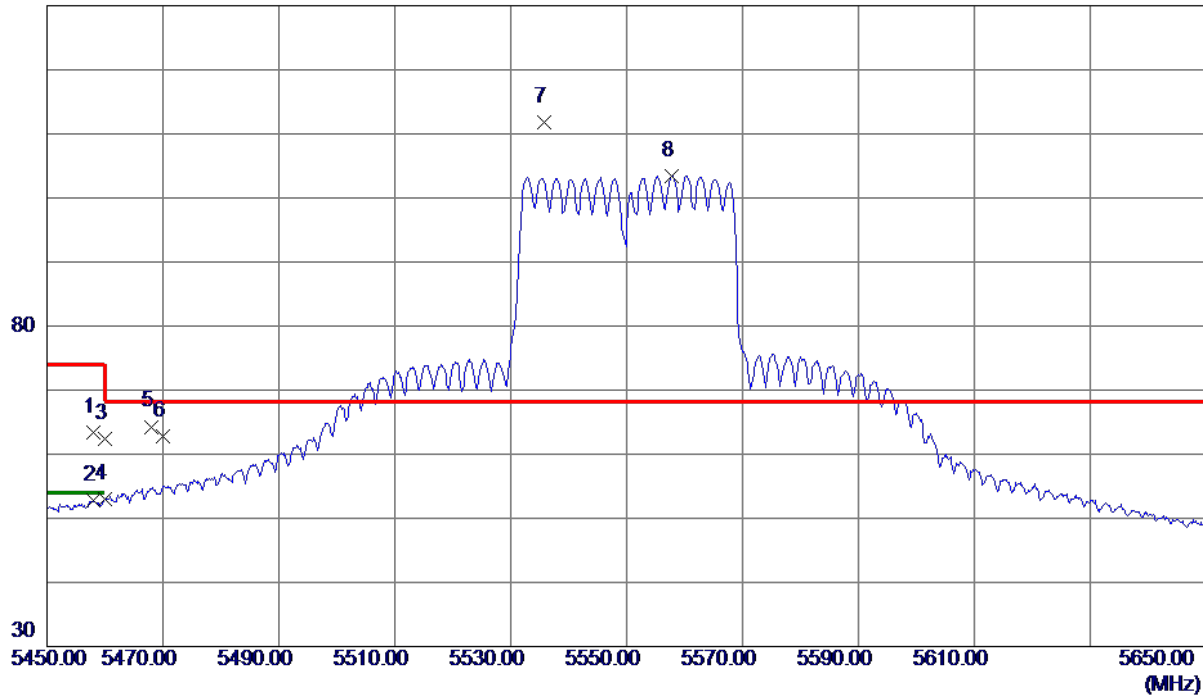


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.9000	48.33	15.05	63.38	74.00	-10.62	Peak	
2	5457.9000	37.79	15.05	52.84	54.00	-1.16	AVG	
3	5460.0000	47.38	15.05	62.43	74.00	-11.57	Peak	
4	5460.0000	37.95	15.05	53.00	54.00	-1.00	AVG	
5	5468.1000	49.23	15.07	64.30	68.30	-4.00	Peak	
6	5470.0000	47.76	15.07	62.83	68.30	-5.47	Peak	
7 *	5535.7000	96.57	15.23	111.80	68.30	43.50	Peak	No Limit
8	5557.8000	88.13	15.28	103.41	999.00	-895.59	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5550 MHz

Vertical

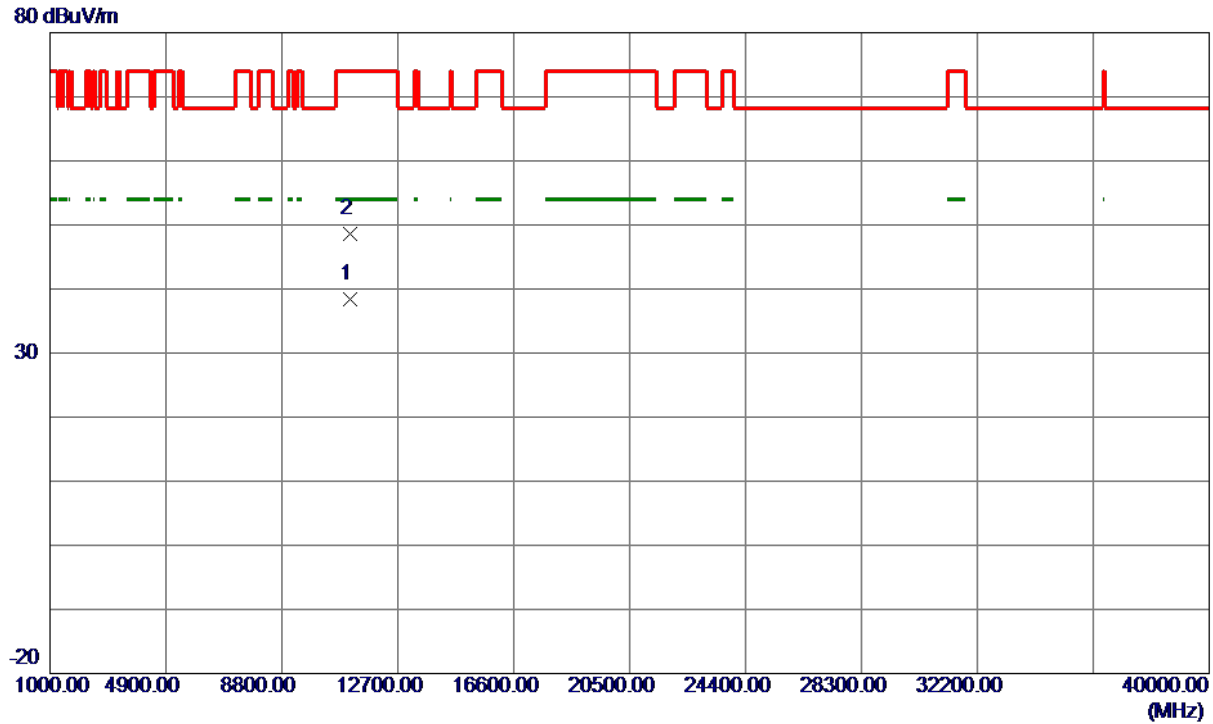

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11099.1000	26.60	11.71	38.31	54.00	-15.69	AVG	
2	11100.7000	36.97	11.71	48.68	74.00	-25.32	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5550 MHz

Horizontal

130 dBuV/m

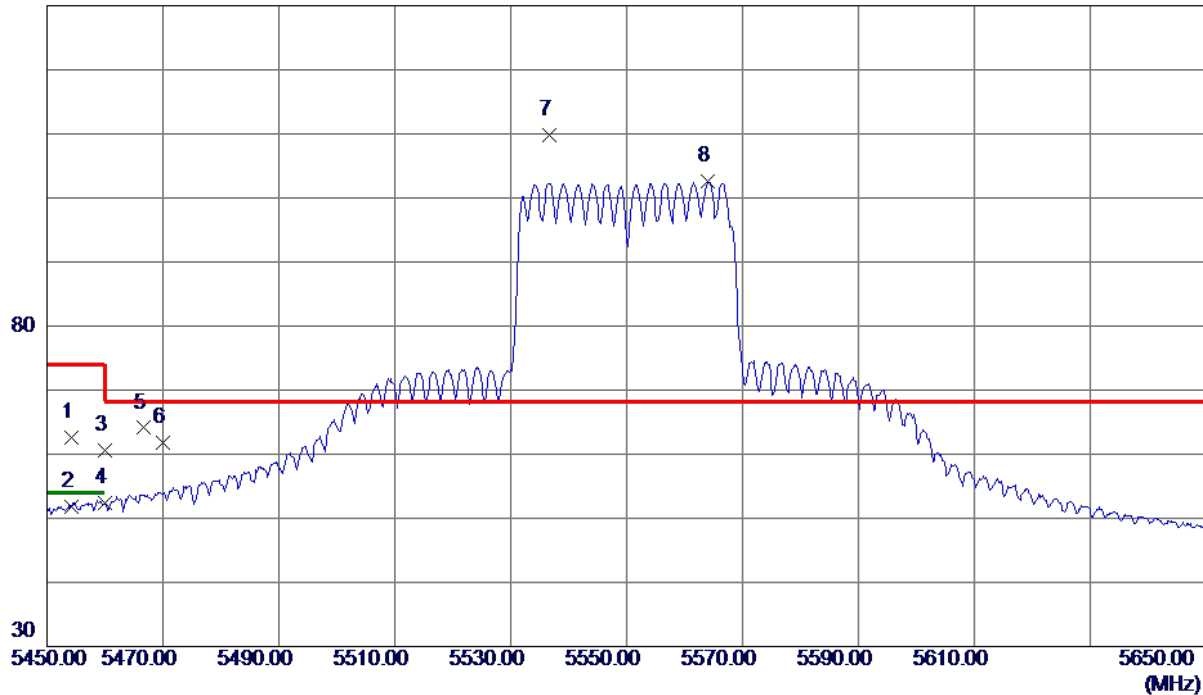

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5454.2000	47.65	15.04	62.69	74.00	-11.31	Peak	
2	5454.2000	36.79	15.04	51.83	54.00	-2.17	AVG	
3	5460.0000	45.54	15.05	60.59	74.00	-13.41	Peak	
4	5460.0000	37.41	15.05	52.46	54.00	-1.54	AVG	
5	5466.7000	49.03	15.07	64.10	68.30	-4.20	Peak	
6	5470.0000	46.71	15.07	61.78	68.30	-6.52	Peak	
7 *	5536.7000	94.53	15.23	109.76	68.30	41.46	Peak	No Limit
8	5564.1000	87.36	15.30	102.66	999.00	-896.34	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5550 MHz

Horizontal

80 dBuV/m

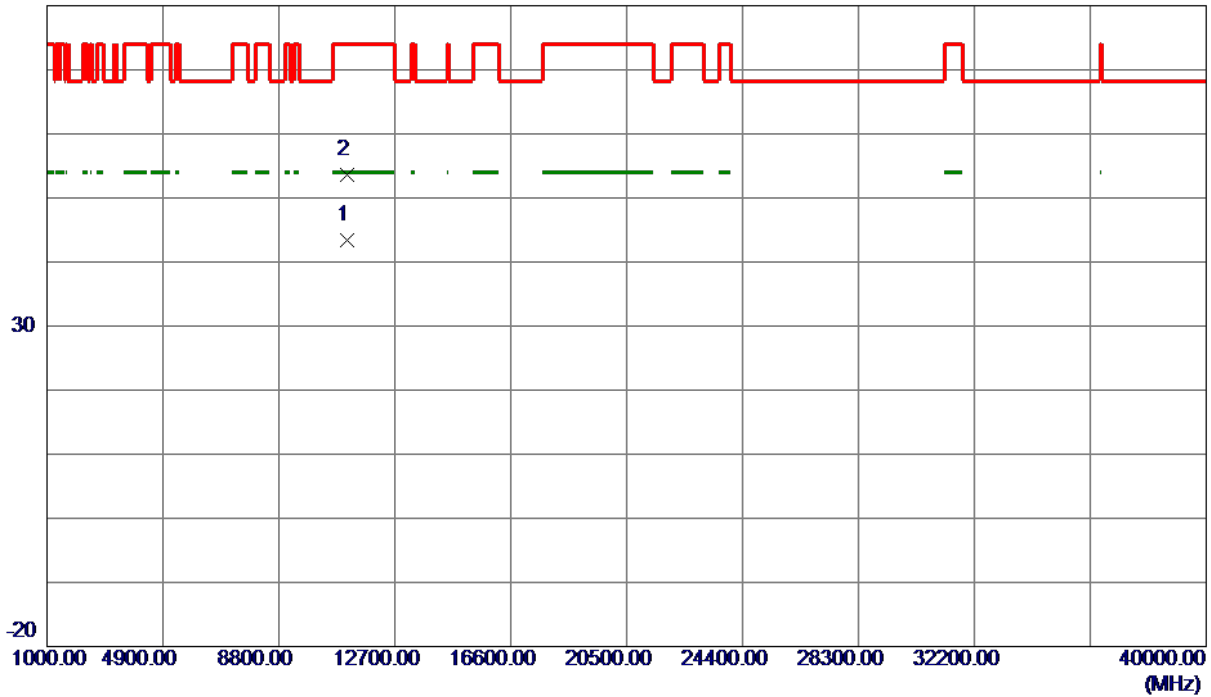

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11101.6750	31.77	11.71	43.48	54.00	-10.52	AVG	
2	11108.2750	41.89	11.72	53.61	74.00	-20.39	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz

Vertical

130 dBuV/m

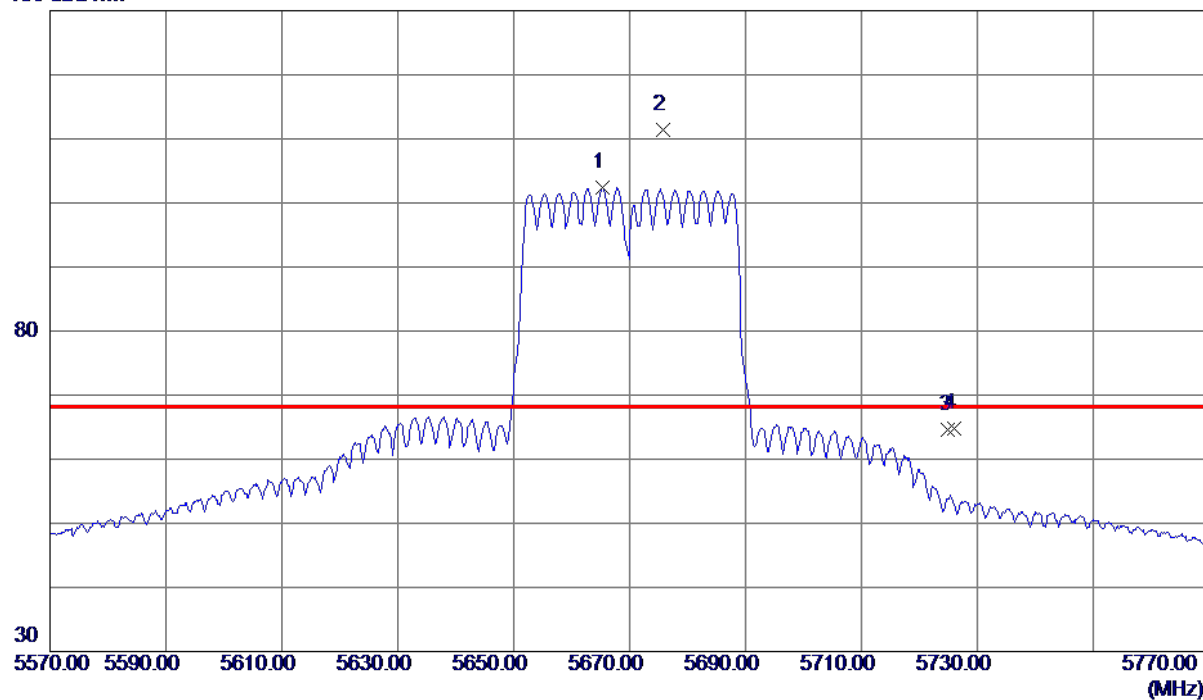

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5665.3000	86.80	15.54	102.34	999.00	-896.66	AVG	No Limit
2 *	5675.7000	95.77	15.56	111.33	68.30	43.03	Peak	No Limit
3	5725.0000	48.86	15.68	64.54	68.30	-3.76	Peak	
4	5725.9000	49.10	15.68	64.78	68.30	-3.52	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz

Vertical

80 dBuV/m

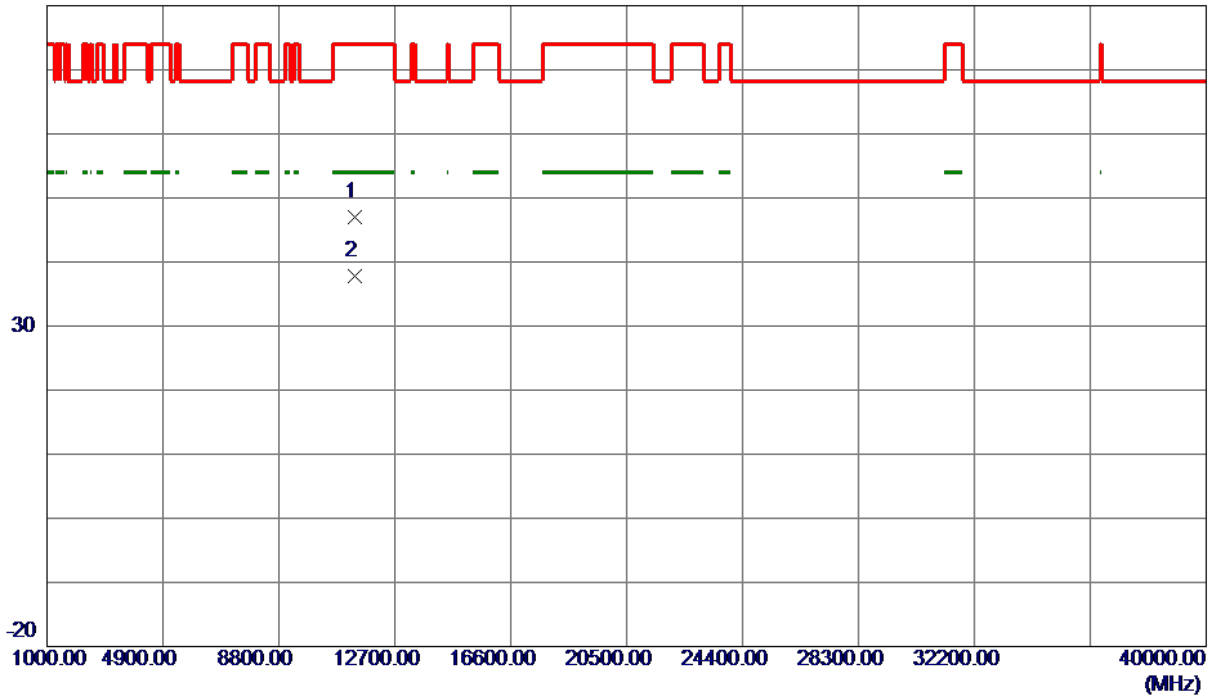


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11341.3500	35.05	11.93	46.98	74.00	-27.02	Peak	
2 *	11341.4000	25.80	11.93	37.73	54.00	-16.27	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz

Horizontal

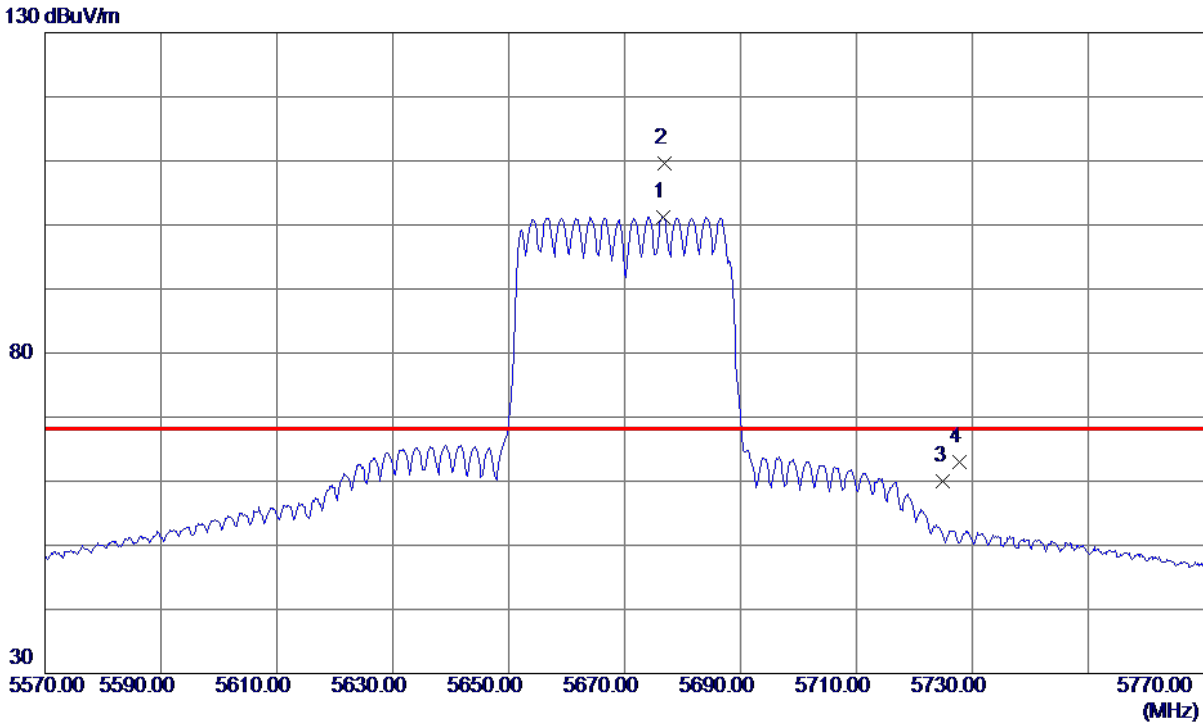

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5676.6000	85.68	15.56	101.24	999.00	-897.76	AVG	No Limit
2 *	5676.9000	94.01	15.56	109.57	68.30	41.27	Peak	No Limit
3	5725.0000	44.40	15.68	60.08	68.30	-8.22	Peak	
4	5727.7000	47.23	15.68	62.91	68.30	-5.39	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz

Horizontal

80 dBuV/m

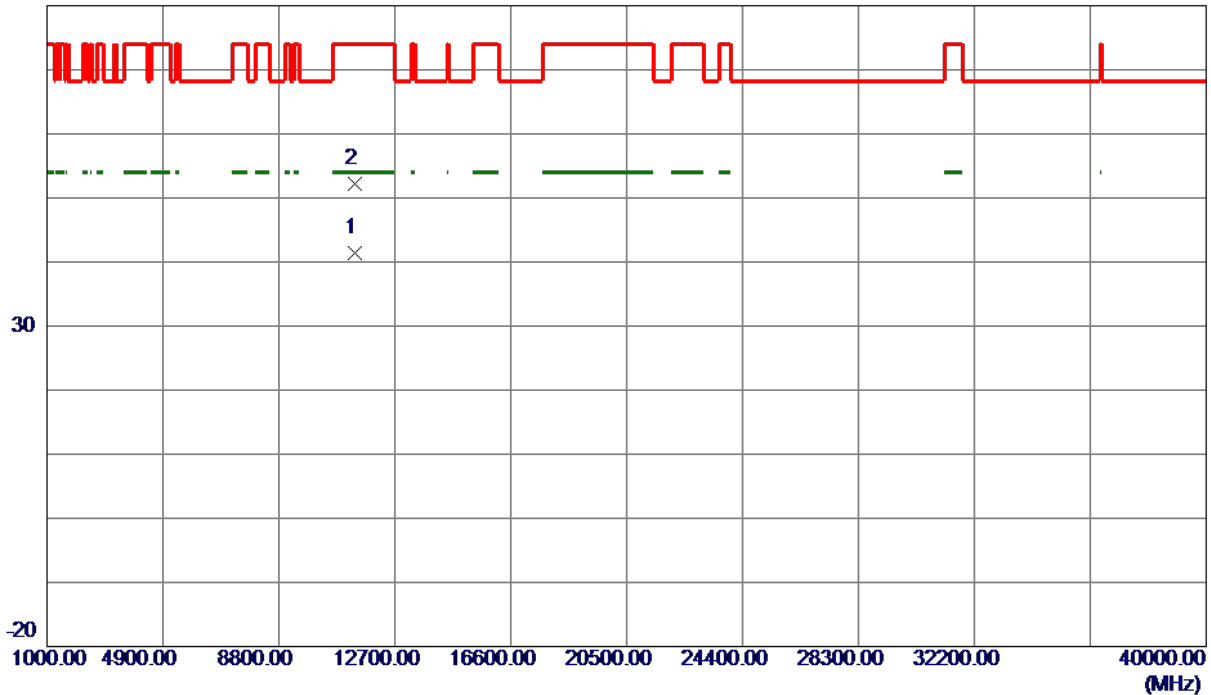

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11341.4250	29.52	11.93	41.45	54.00	-12.55	AVG	
2	11348.2000	40.24	11.94	52.18	74.00	-21.82	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz

Vertical

130 dBuV/m

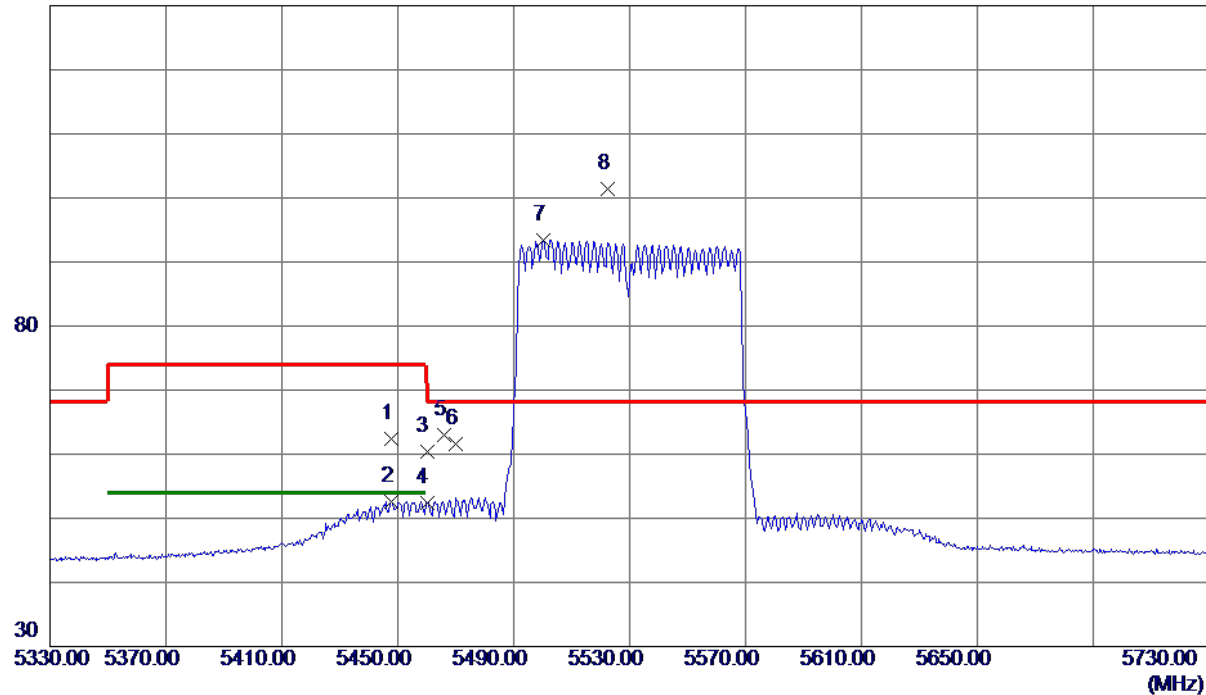


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5447.8000	47.31	15.02	62.33	74.00	-11.67	Peak	
2	5447.8000	37.61	15.02	52.63	54.00	-1.37	AVG	
3	5460.0000	45.34	15.05	60.39	74.00	-13.61	Peak	
4	5460.0000	37.32	15.05	52.37	54.00	-1.63	AVG	
5	5465.8000	47.99	15.06	63.05	68.30	-5.25	Peak	
6	5470.0000	46.46	15.07	61.53	68.30	-6.77	Peak	
7	5500.2000	78.26	15.15	93.41	999.00	-905.59	AVG	No Limit
8 *	5522.6000	86.23	15.20	101.43	68.30	33.13	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz

Vertical

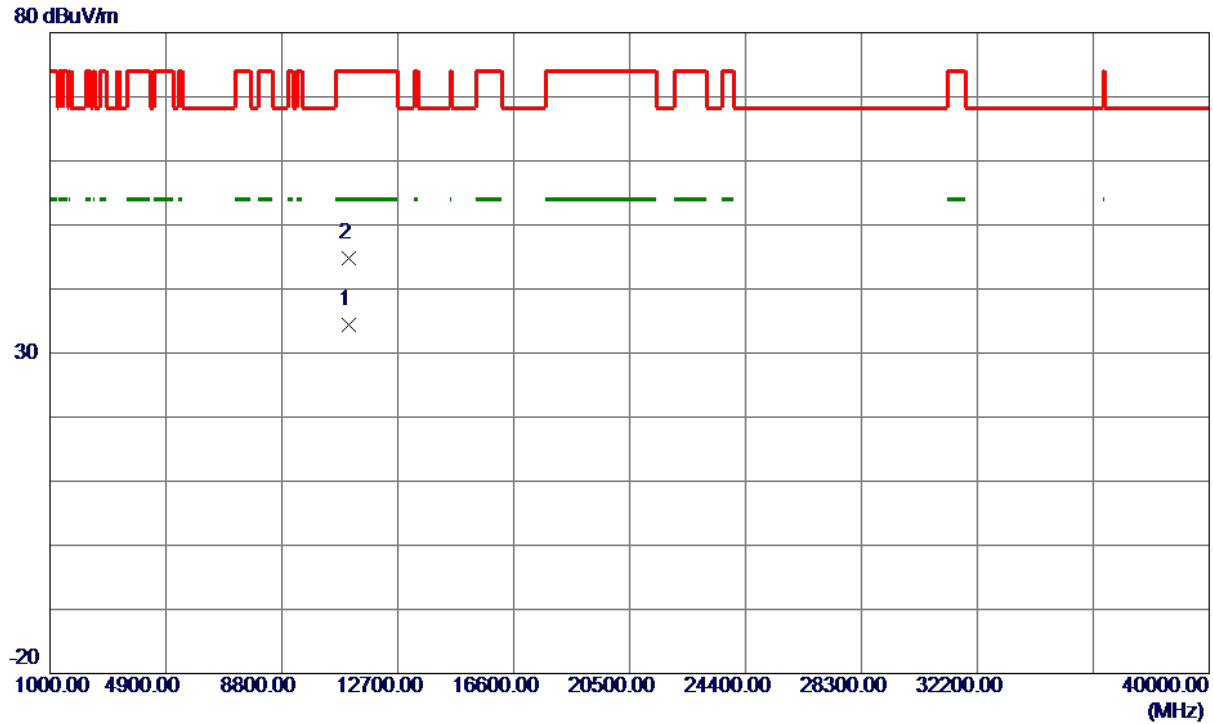

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11043.1250	22.82	11.66	34.48	54.00	-19.52	AVG	
2	11065.6500	33.16	11.68	44.84	74.00	-29.16	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz

Horizontal

130 dBuV/m

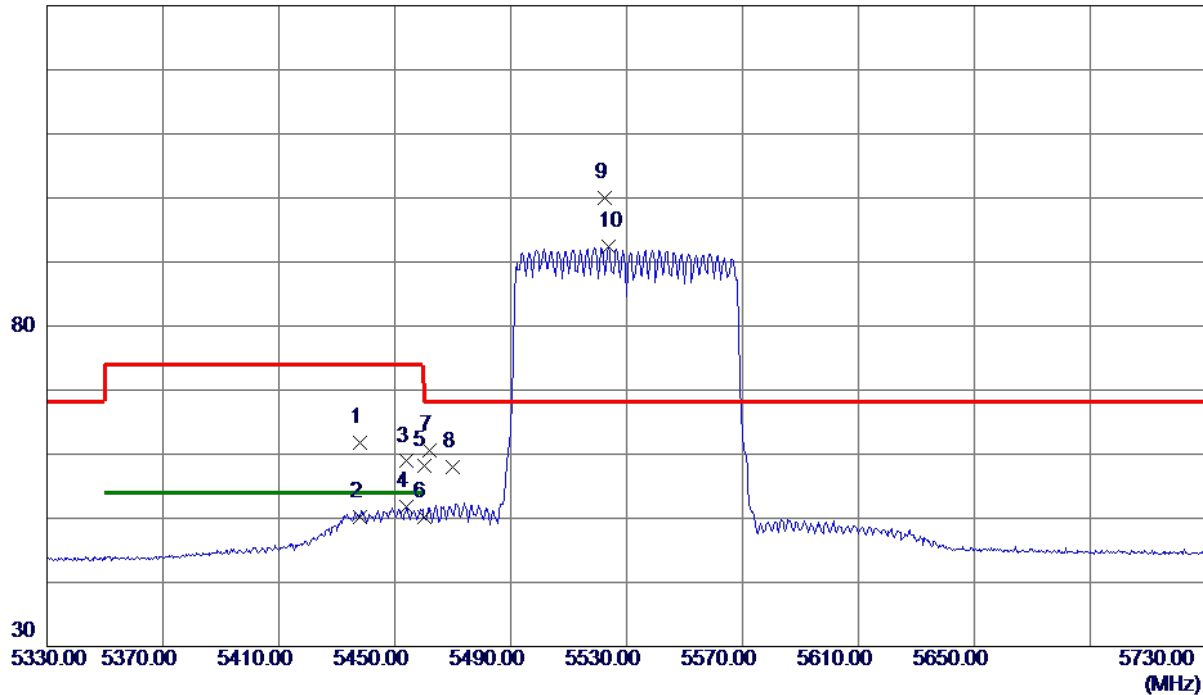

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5438.2000	46.78	15.00	61.78	74.00	-12.22	Peak	
2	5438.2000	35.28	15.00	50.28	54.00	-3.72	AVG	
3	5454.0000	43.86	15.04	58.90	74.00	-15.10	Peak	
4	5454.0000	36.69	15.04	51.73	54.00	-2.27	AVG	
5	5460.0000	43.10	15.05	58.15	74.00	-15.85	Peak	
6	5460.0000	35.17	15.05	50.22	54.00	-3.78	AVG	
7	5462.0000	45.45	15.06	60.51	68.30	-7.79	Peak	
8	5470.0000	42.96	15.07	58.03	68.30	-10.27	Peak	
9 *	5522.6000	84.76	15.20	99.96	68.30	31.66	Peak	No Limit
10	5523.8000	77.26	15.20	92.46	999.00	-906.54	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz

Horizontal

80 dBuV/m

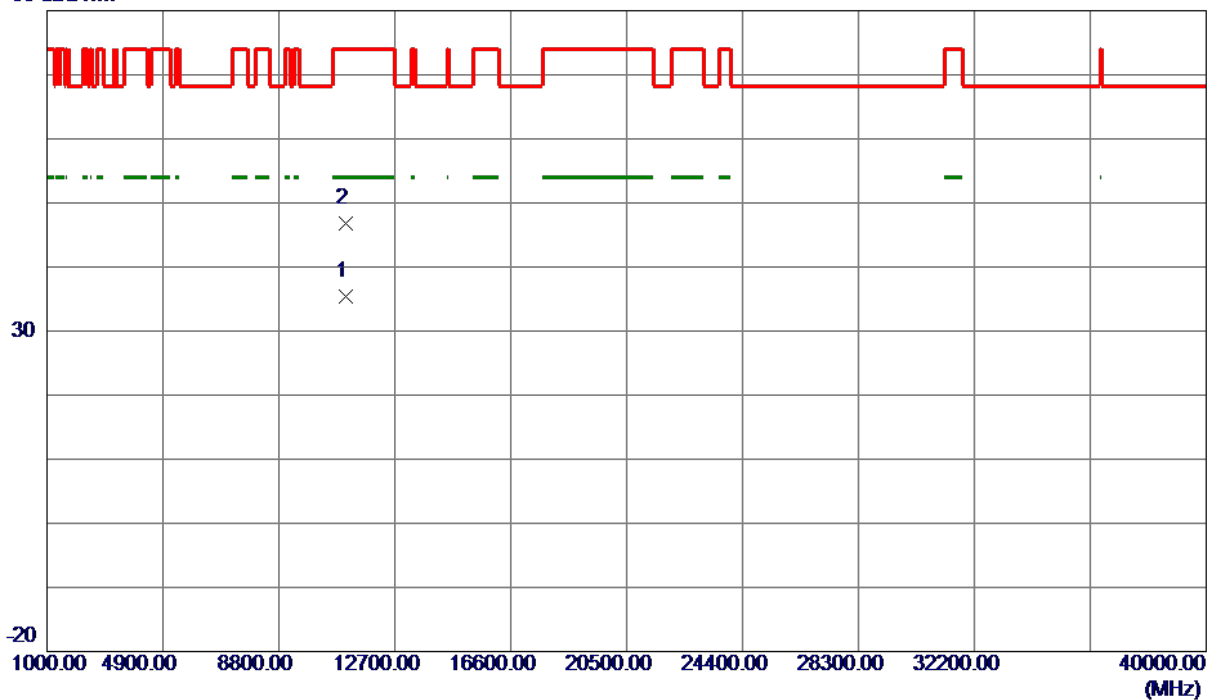

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11059.2000	23.66	11.67	35.33	54.00	-18.67	AVG	
2	11073.7750	35.12	11.69	46.81	74.00	-27.19	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5610 MHz

Vertical

130 dBuV/m

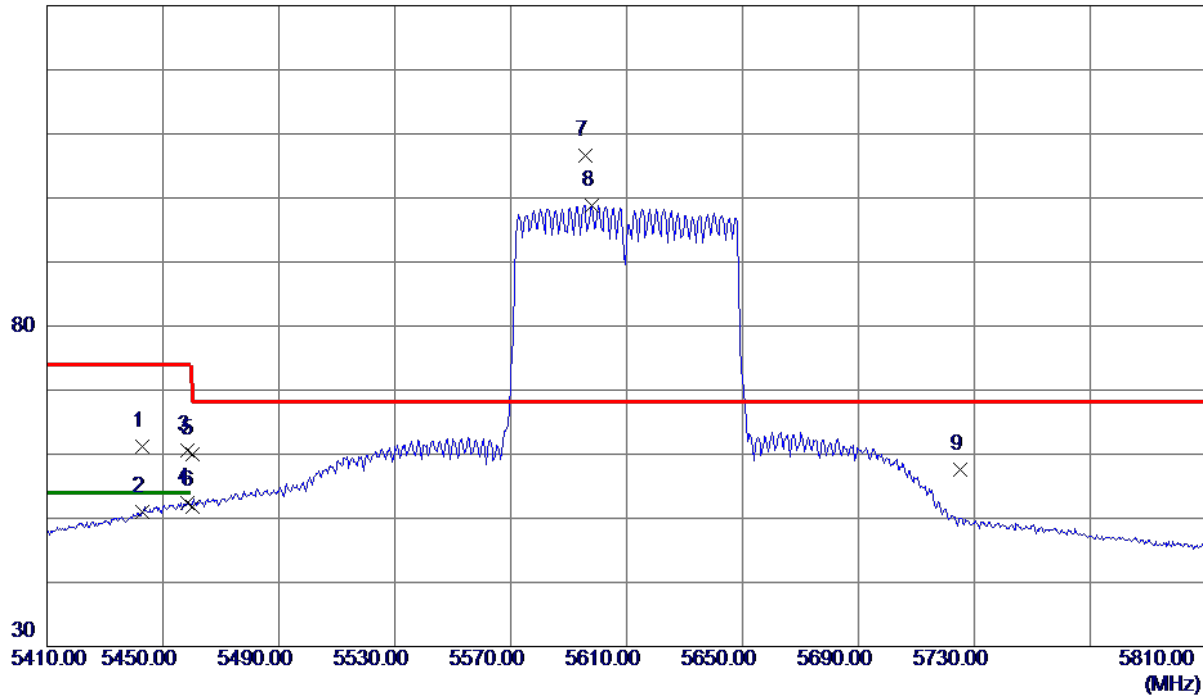

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5442.8000	46.21	15.01	61.22	74.00	-12.78	Peak	
2	5442.8000	36.04	15.01	51.05	54.00	-2.95	AVG	
3	5458.4000	45.58	15.05	60.63	74.00	-13.37	Peak	
4	5458.4000	37.43	15.05	52.48	54.00	-1.52	AVG	
5	5460.0000	44.95	15.05	60.00	74.00	-14.00	Peak	
6	5460.0000	36.85	15.05	51.90	54.00	-2.10	AVG	
7 *	5595.6000	91.28	15.37	106.65	68.30	38.35	Peak	No Limit
8	5597.8000	83.48	15.38	98.86	999.00	-900.14	AVG	No Limit
9	5725.0000	41.99	15.68	57.67	68.30	-10.63	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5610 MHz

Vertical

80 dBuV/m

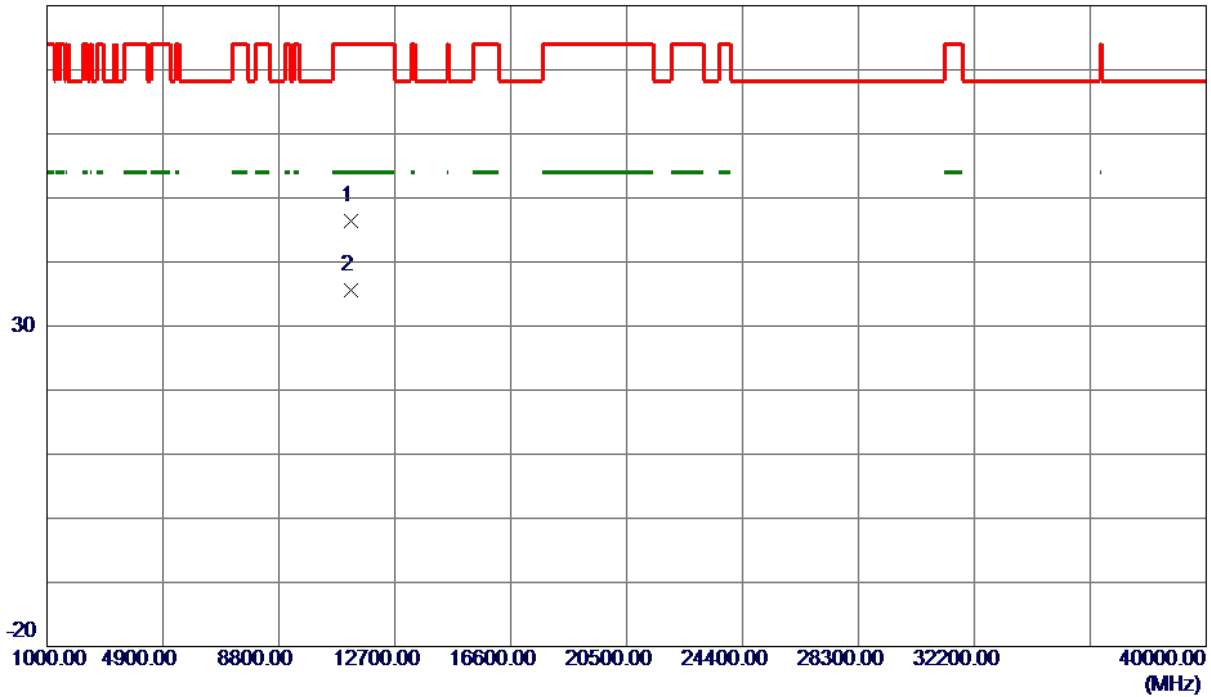

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11224.3500	34.51	11.82	46.33	74.00	-27.67	Peak	
2 *	11228.8000	23.80	11.83	35.63	54.00	-18.37	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5610 MHz

Horizontal

130 dBuV/m

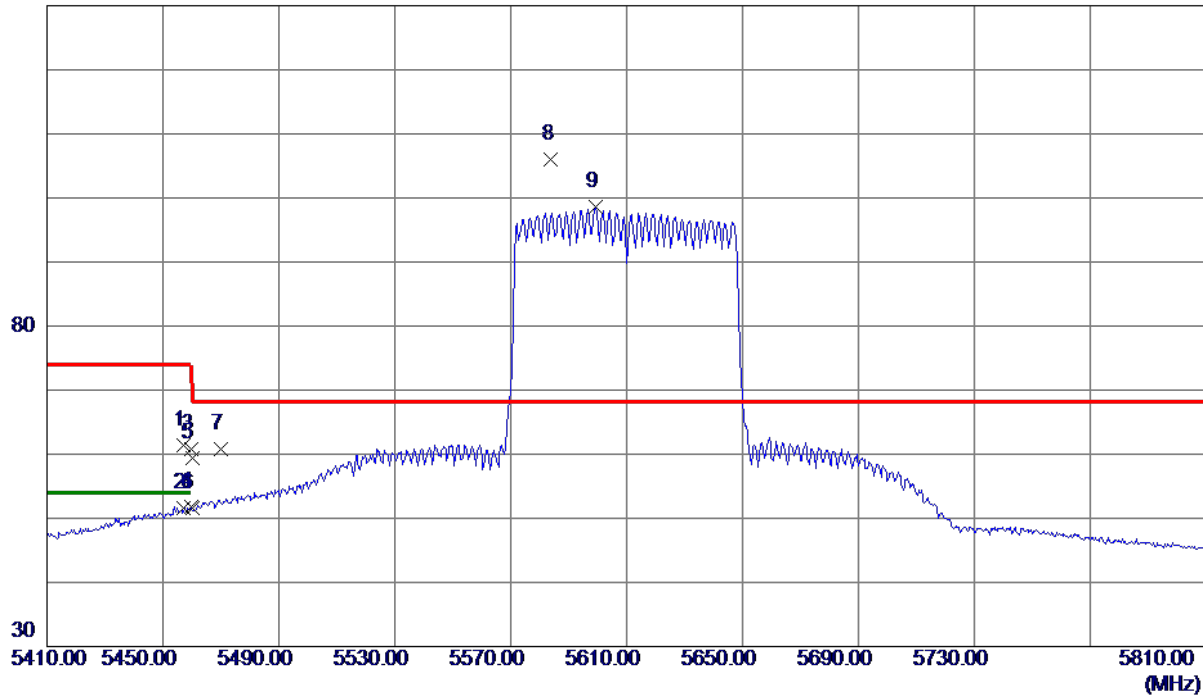

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.0000	46.30	15.04	61.34	74.00	-12.66	Peak	
2	5457.0000	36.48	15.04	51.52	54.00	-2.48	AVG	
3	5459.8000	45.69	15.05	60.74	74.00	-13.26	Peak	
4	5459.8000	36.79	15.05	51.84	54.00	-2.16	AVG	
5	5460.0000	44.38	15.05	59.43	74.00	-14.57	Peak	
6	5460.0000	36.64	15.05	51.69	54.00	-2.31	AVG	
7	5470.0000	45.75	15.07	60.82	68.30	-7.48	Peak	
8 *	5584.0000	90.60	15.34	105.94	68.30	37.64	Peak	No Limit
9	5599.2000	83.16	15.38	98.54	999.00	-900.46	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5610 MHz

Horizontal

80 dBuV/m

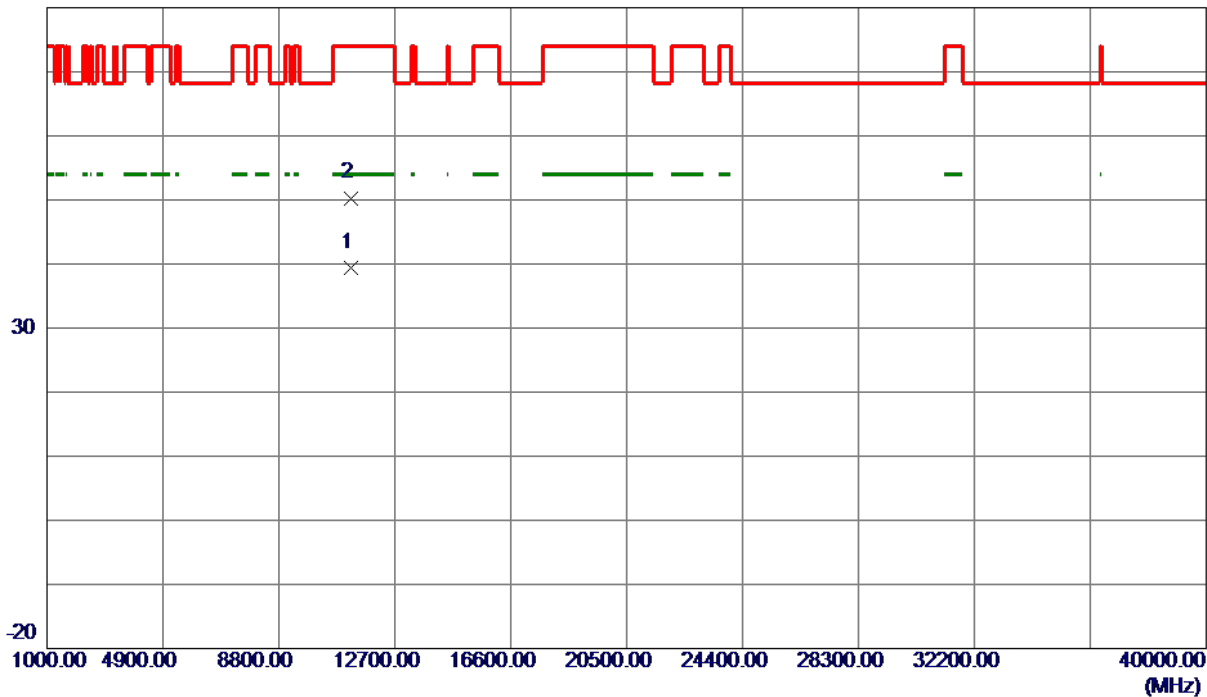

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11234.2500	27.63	11.83	39.46	54.00	-14.54	AVG	
2	11236.3000	38.47	11.83	50.30	74.00	-23.70	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Vertical

130 dBuV/m

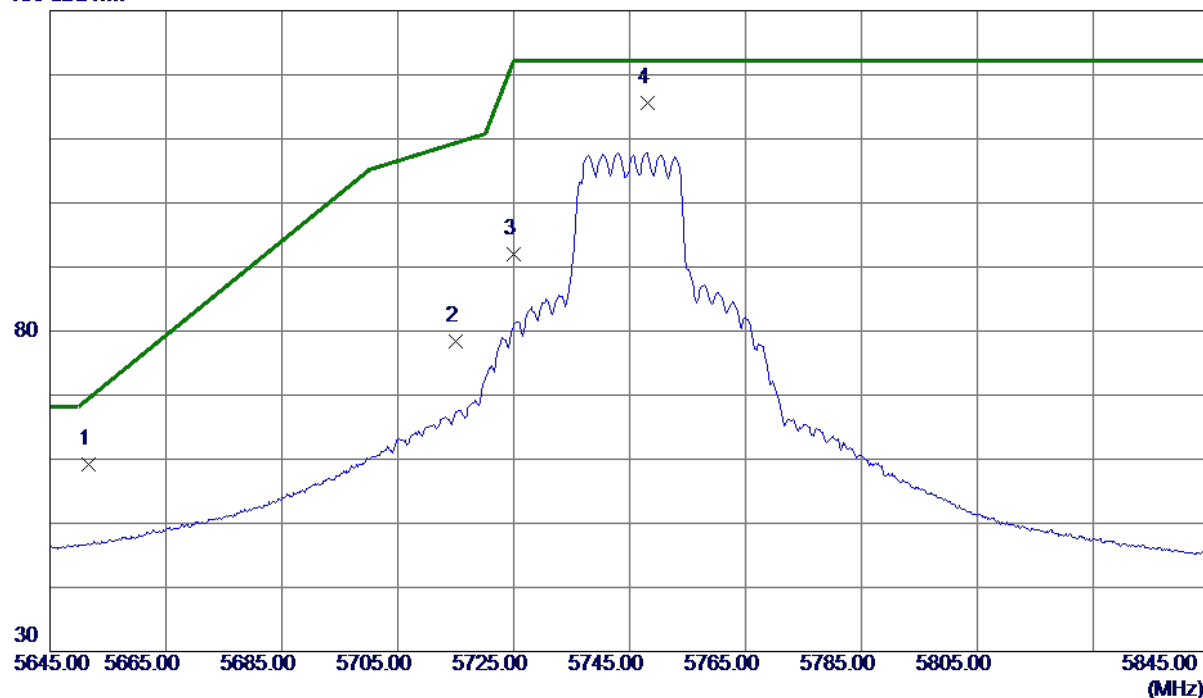


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5651.6000	43.61	15.50	59.11	69.38	-10.27	Peak	
2	5715.0000	62.66	15.65	78.31	109.40	-31.09	Peak	
3	5725.0000	76.40	15.68	92.08	122.20	-30.12	Peak	
4 *	5748.2000	99.82	15.73	115.55	122.20	-6.65	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Vertical

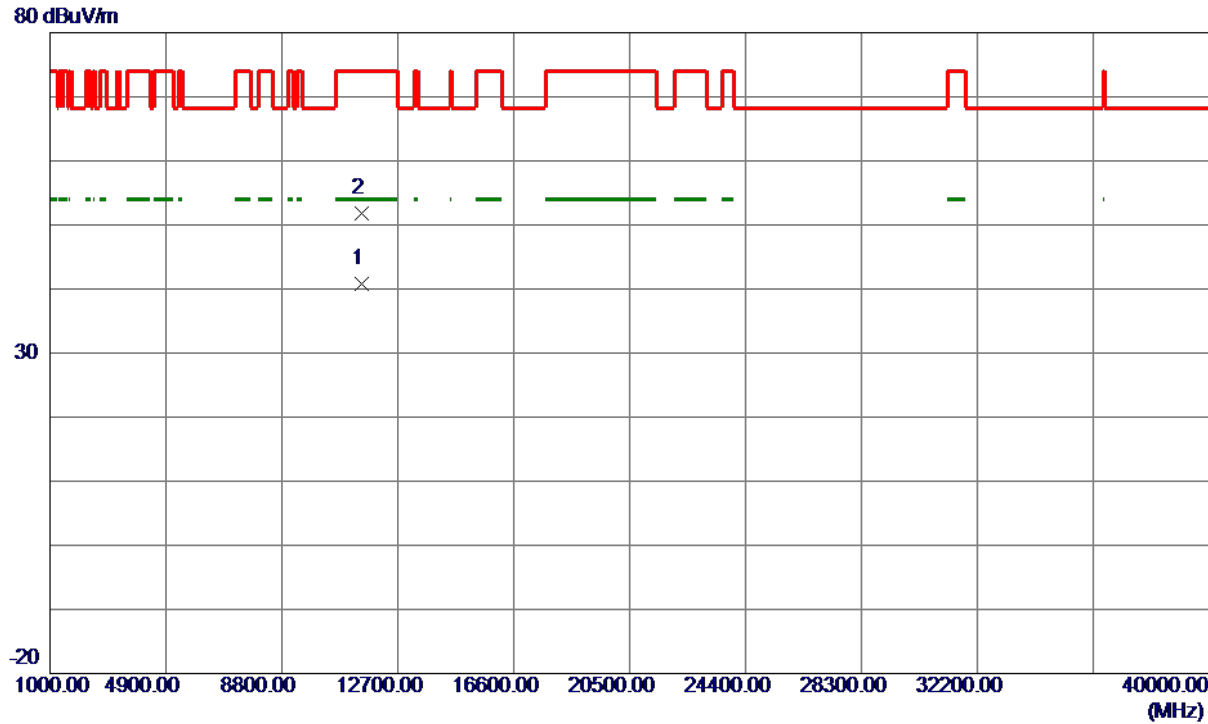

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.2200	28.64	12.07	40.71	54.00	-13.29	AVG	
2	11492.1600	39.65	12.07	51.72	74.00	-22.28	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Horizontal

130 dBuV/m

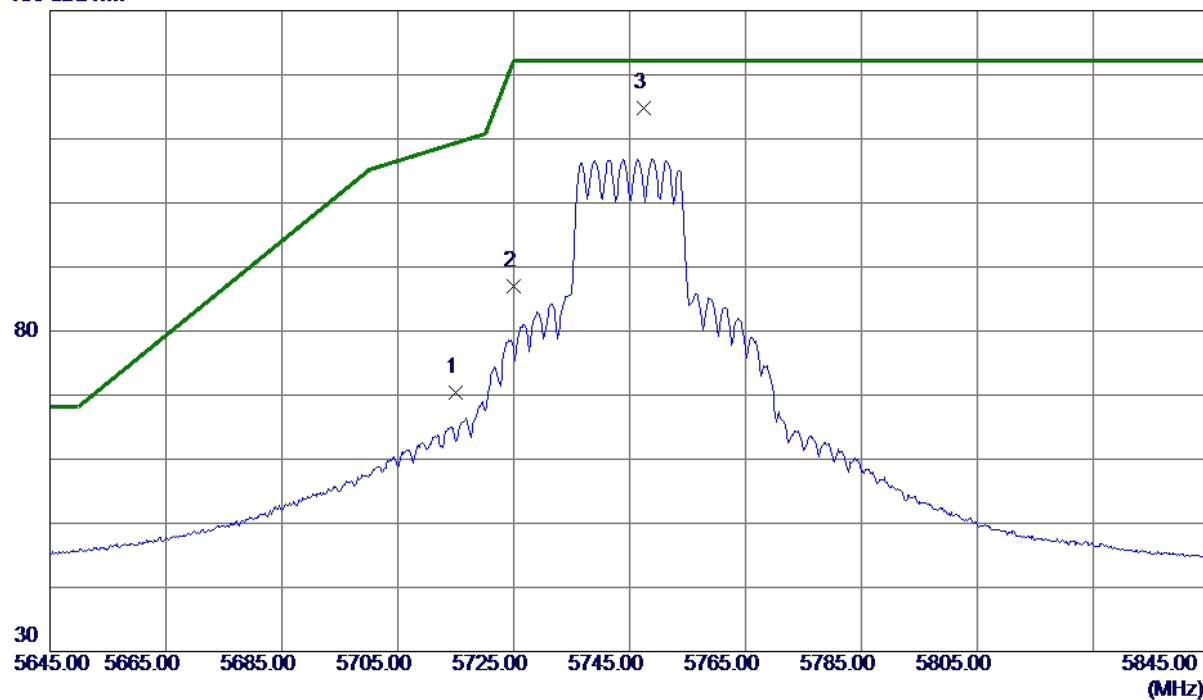

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	54.77	15.65	70.42	109.40	-38.98	Peak	
2	5725.0000	71.22	15.68	86.90	122.20	-35.30	Peak	
3 *	5747.4000	99.10	15.73	114.83	122.20	-7.37	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Horizontal

80 dBuV/m

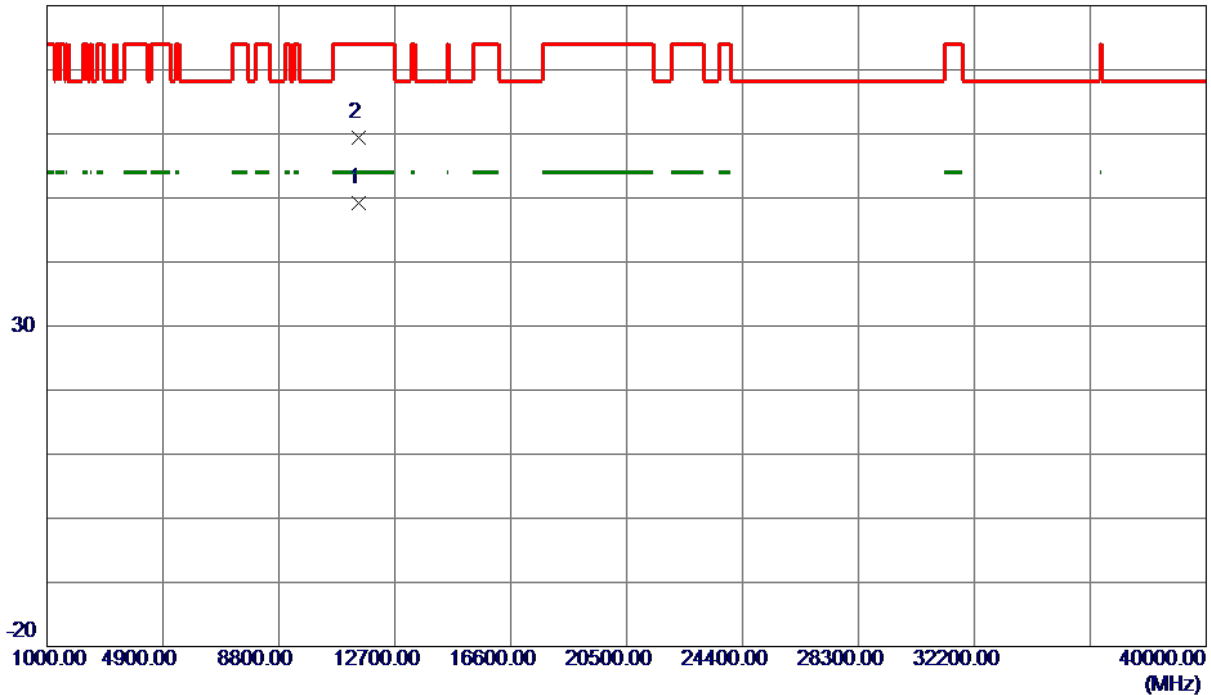

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11491.5000	37.20	12.07	49.27	54.00	-4.73	AVG	
2	11496.3200	47.38	12.07	59.45	74.00	-14.55	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Vertical

130 dBuV/m

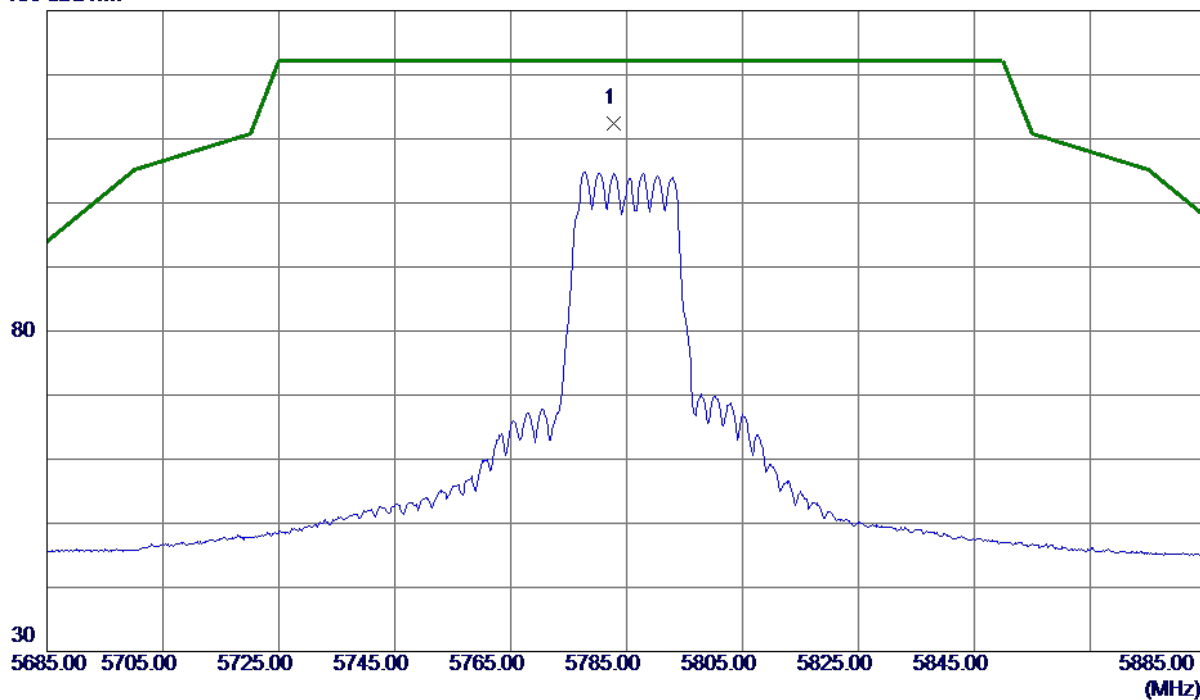

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5782.8000	96.66	15.82	112.48	122.20	-9.72	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Vertical

80 dBuV/m

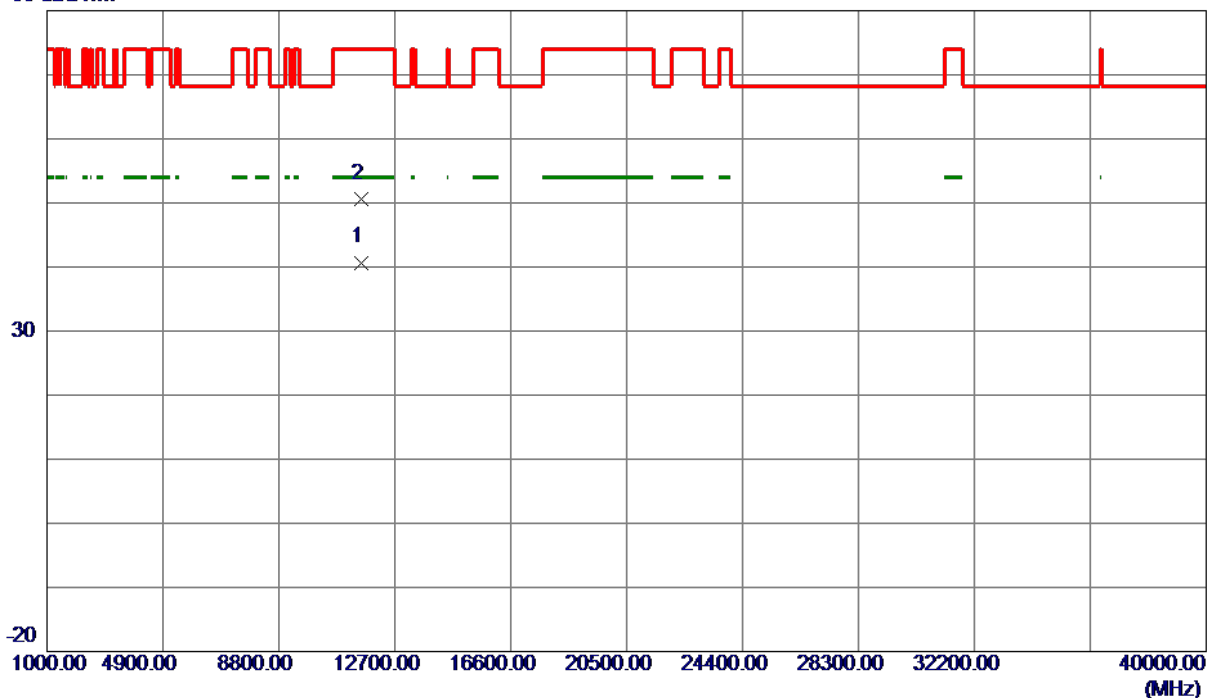

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.7400	28.55	12.15	40.70	54.00	-13.30	AVG	
2	11574.0400	38.39	12.15	50.54	74.00	-23.46	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Horizontal

130 dBuV/m

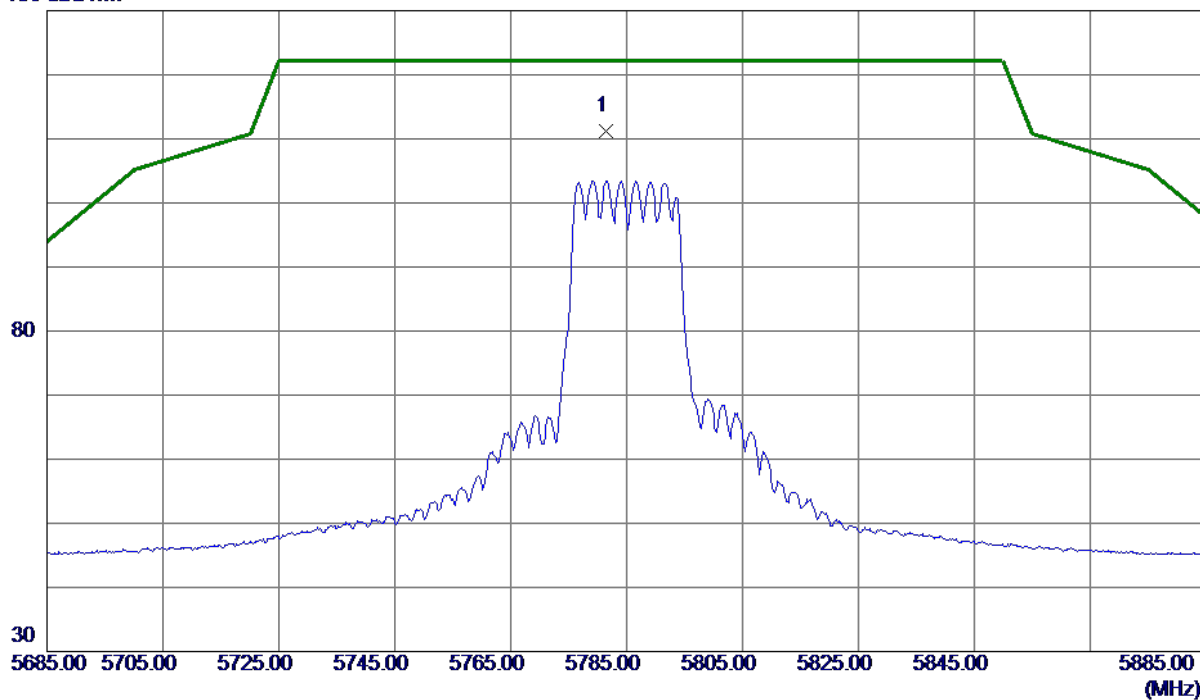


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5781.4000	95.34	15.81	111.15	122.20	-11.05	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Vertical

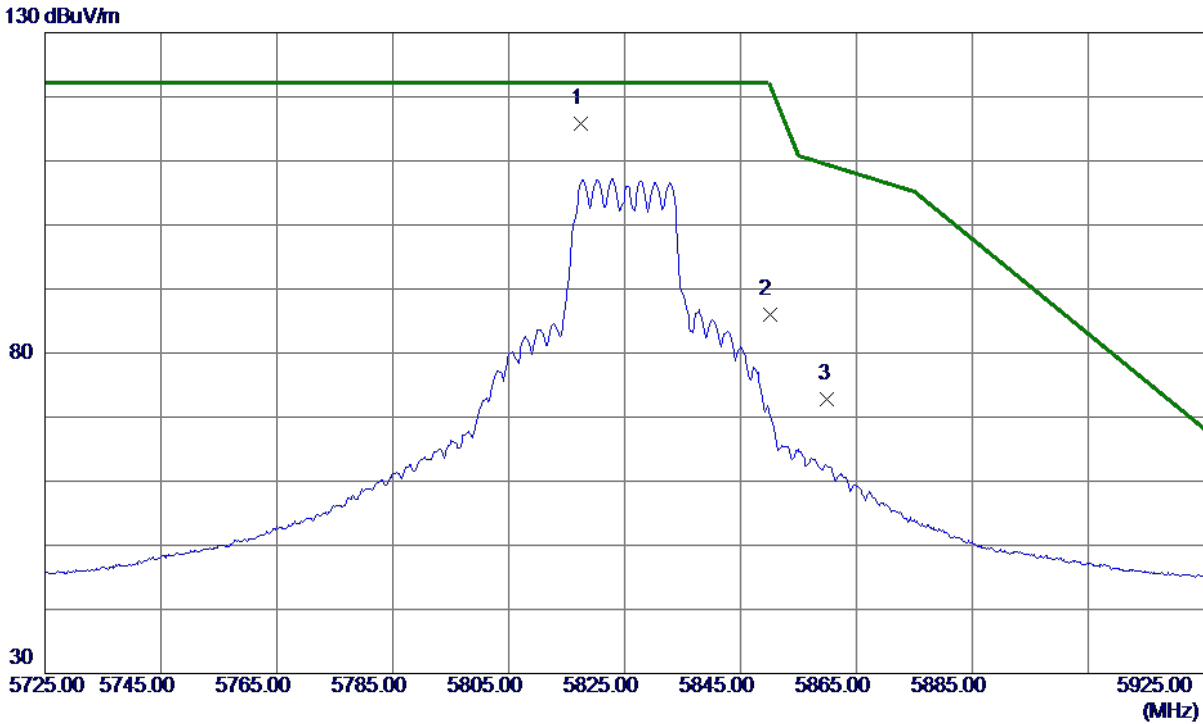


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5817.4000	99.86	15.90	115.76	122.20	-6.44	Peak	No Limit
2	5850.0000	70.06	15.97	86.03	122.20	-36.17	Peak	
3	5860.0000	56.74	16.00	72.74	109.40	-36.66	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Vertical

80 dBuV/m

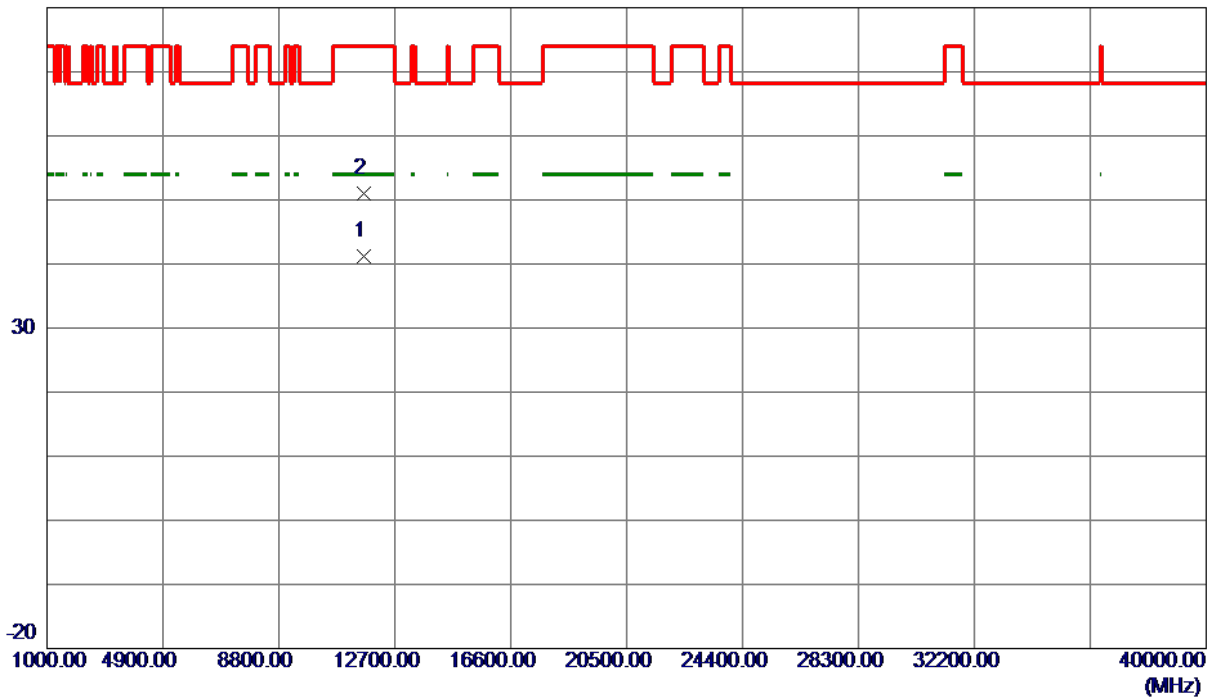

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.1400	29.05	12.23	41.28	54.00	-12.72	AVG	
2	11655.4400	38.80	12.23	51.03	74.00	-22.97	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Horizontal

130 dBuV/m

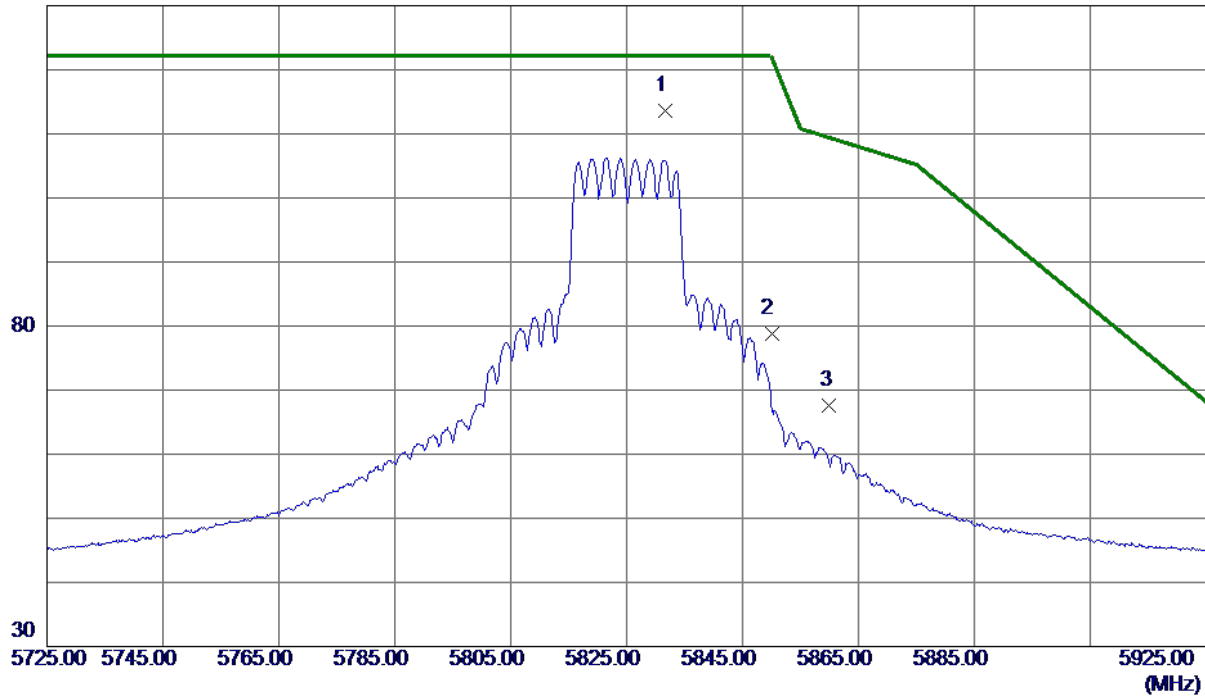

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5831.7000	97.75	15.93	113.68	122.20	-8.52	Peak	No Limit
2	5850.0000	62.88	15.97	78.85	122.20	-43.35	Peak	
3	5860.0000	51.64	16.00	67.64	109.40	-41.76	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Horizontal

80 dBuV/m

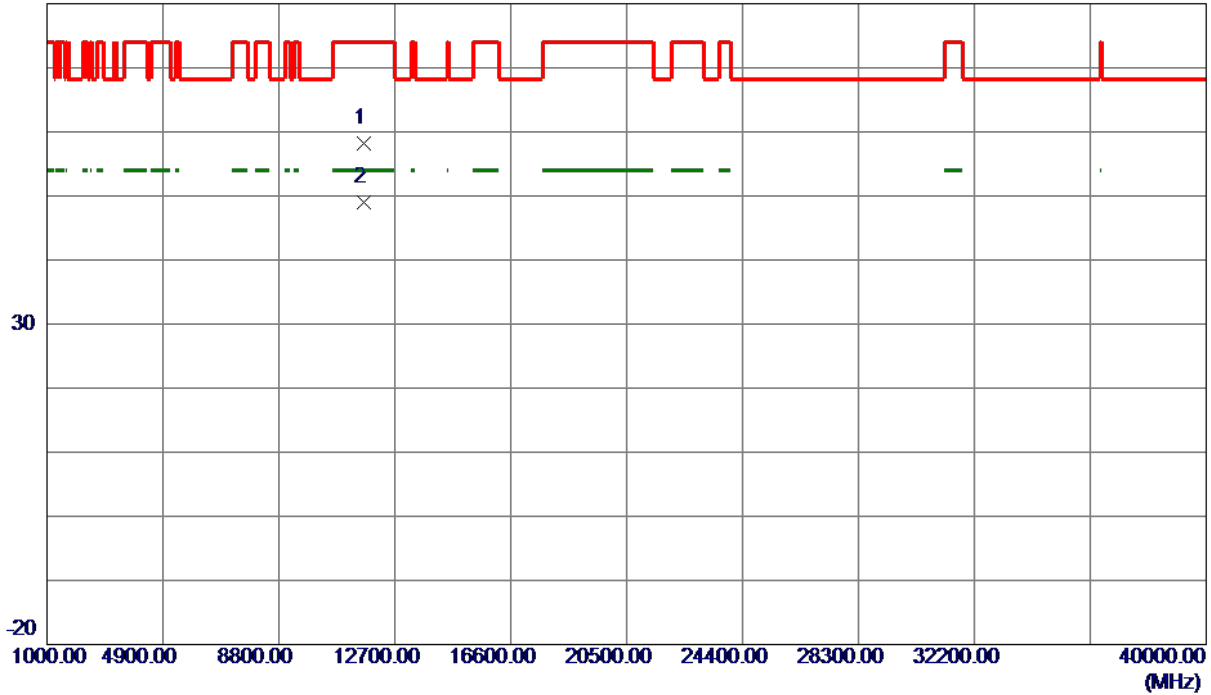

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11649.0199	45.94	12.23	58.17	74.00	-15.83	Peak	
2 *	11651.5000	36.82	12.23	49.05	54.00	-4.95	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Vertical

130 dBuV/m

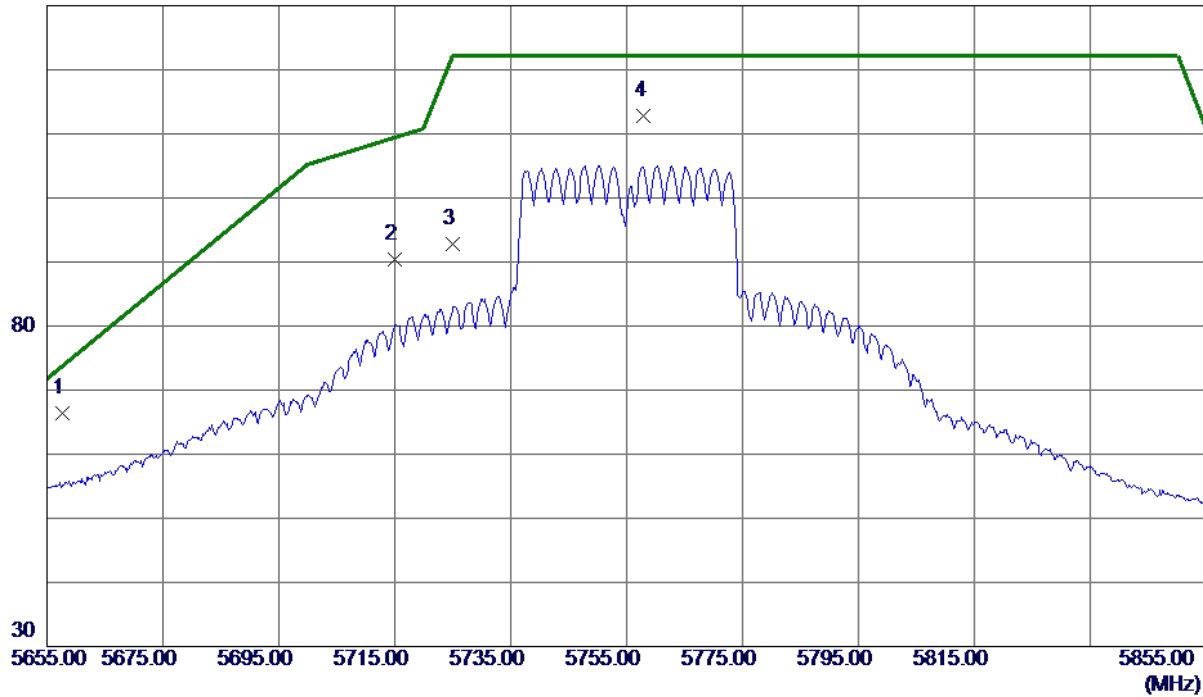


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5657.6000	50.80	15.52	66.32	73.82	-7.50	Peak	
2	5715.0000	74.76	15.65	90.41	109.40	-18.99	Peak	
3	5725.0000	77.19	15.68	92.87	122.20	-29.33	Peak	
4	5758.0000	97.00	15.76	112.76	122.20	-9.44	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Vertical

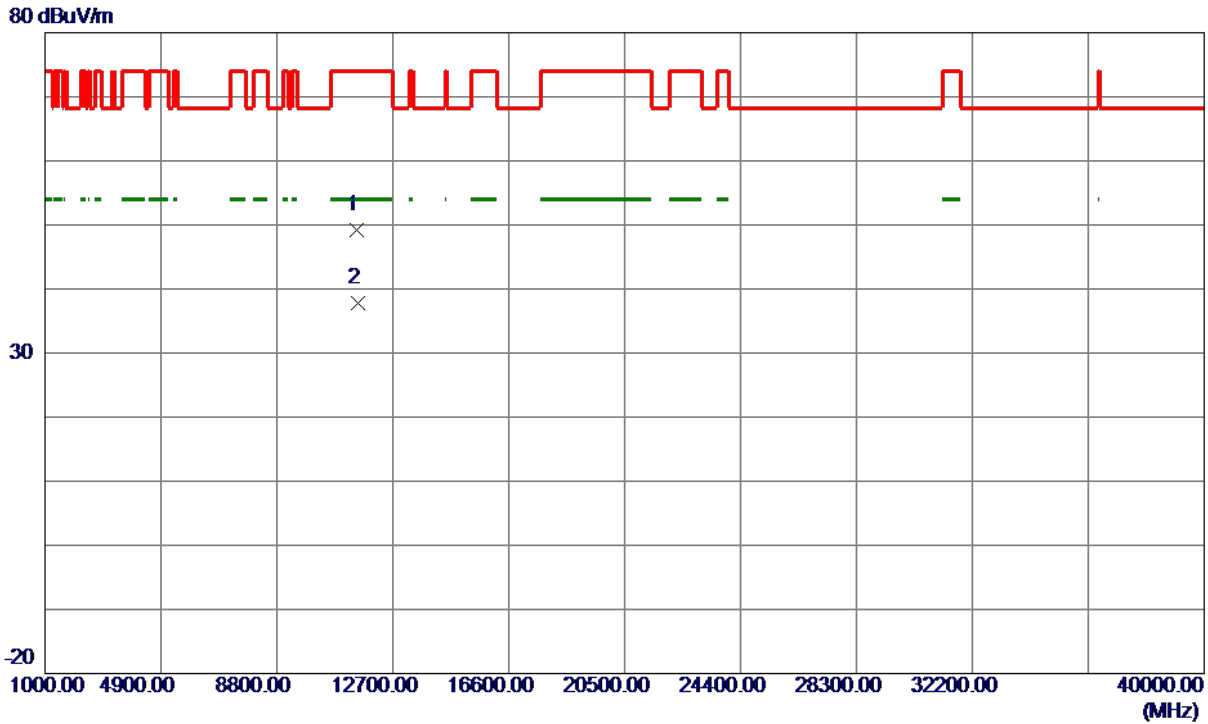


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11506.5250	37.07	12.08	49.15	74.00	-24.85	Peak	
2 *	11510.6500	25.64	12.09	37.73	54.00	-16.27	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Horizontal

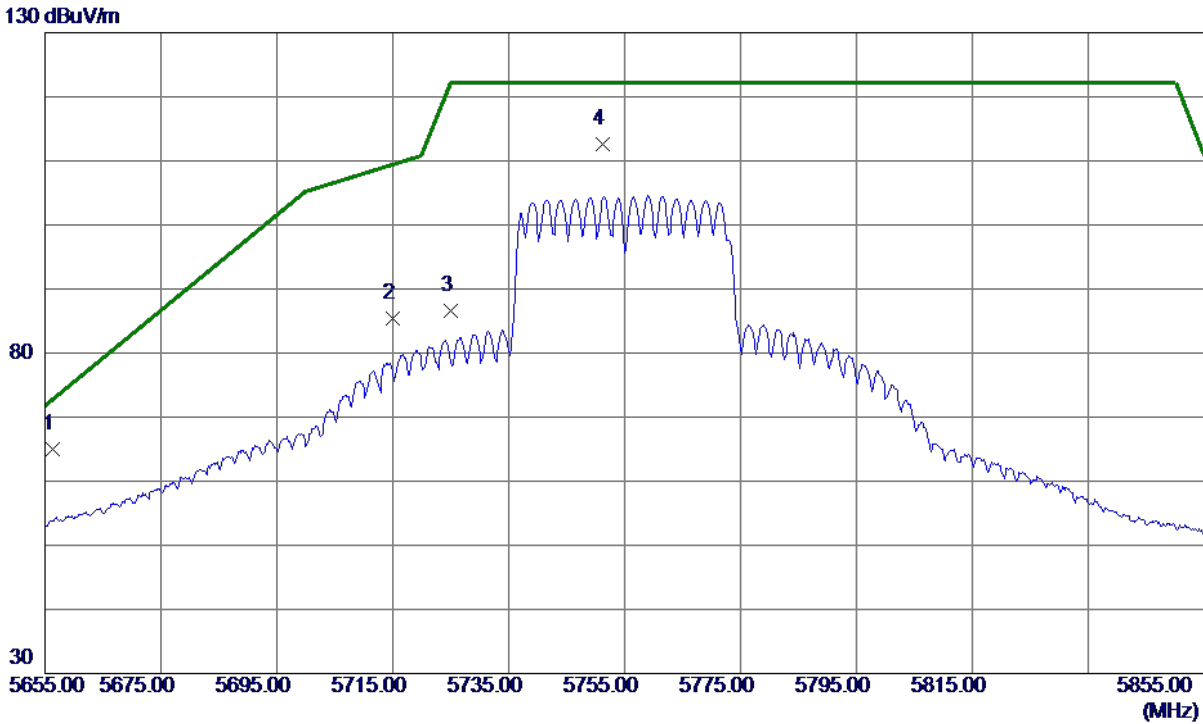


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5656.4000	49.39	15.52	64.91	72.94	-8.03	Peak	
2	5715.0000	69.79	15.65	85.44	109.40	-23.96	Peak	
3	5725.0000	70.90	15.68	86.58	122.20	-35.62	Peak	
4	5751.2000	96.80	15.74	112.54	122.20	-9.66	Peak	No Limit

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Horizontal

80 dBuV/m

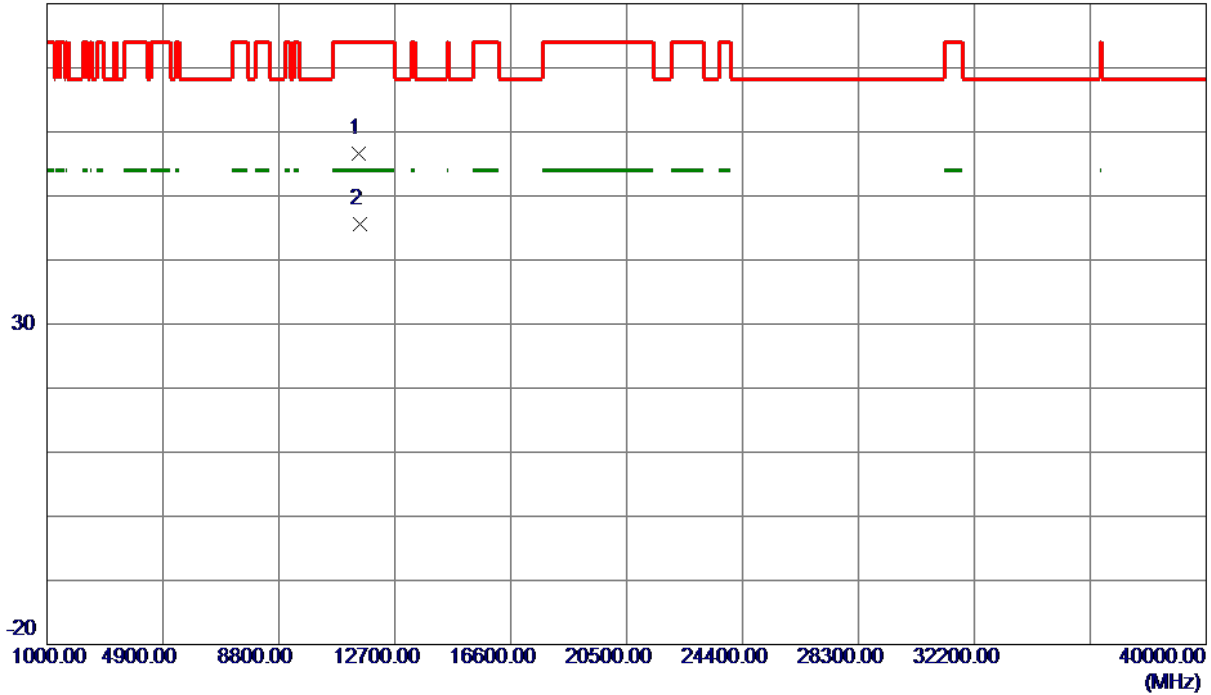

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11506.4500	44.46	12.08	56.54	74.00	-17.46	Peak	
2 *	11508.9750	33.53	12.08	45.61	54.00	-8.39	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Vertical

130 dBuV/m

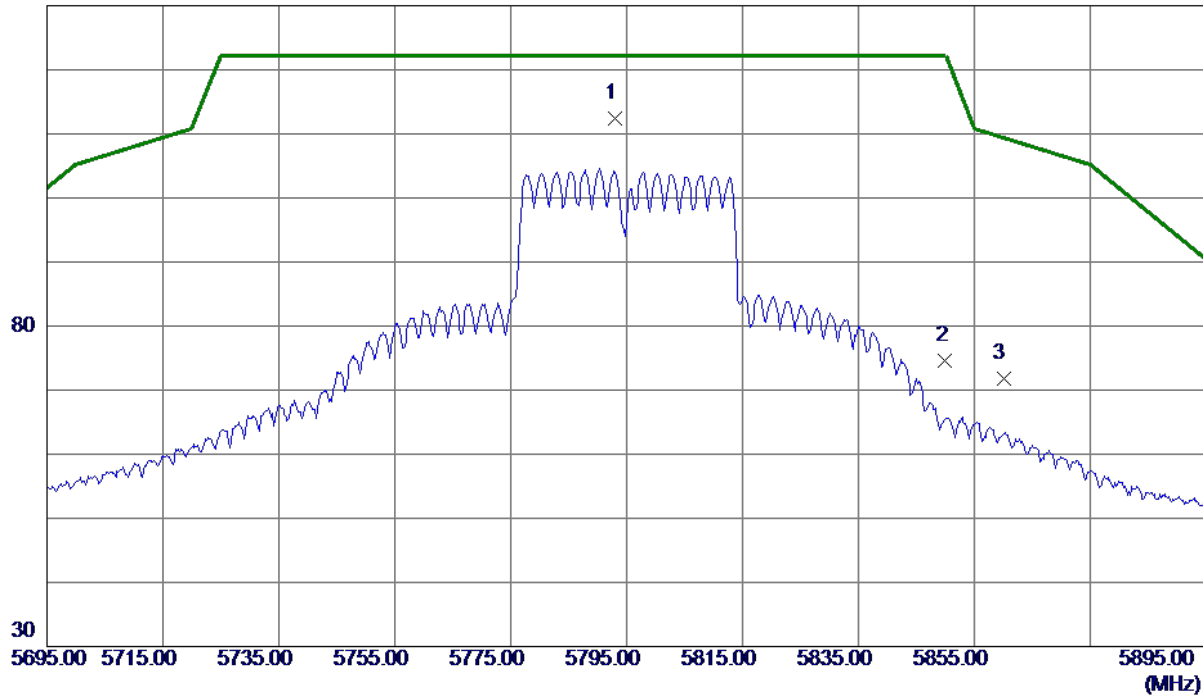


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5793.0000	96.50	15.84	112.34	122.20	-9.86	Peak	No Limit
2	5850.0000	58.60	15.97	74.57	122.20	-47.63	Peak	
3	5860.0000	55.83	16.00	71.83	109.40	-37.57	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Vertical

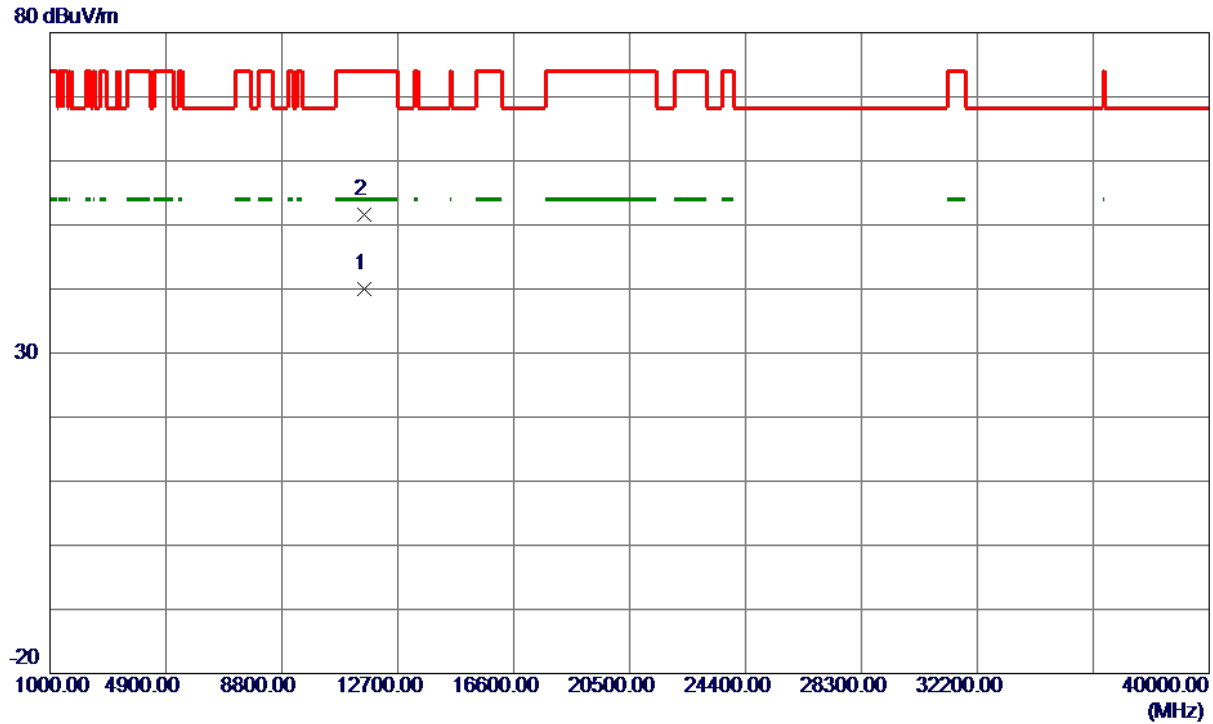


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11588.5000	27.90	12.16	40.06	54.00	-13.94	AVG	
2	11592.6250	39.34	12.17	51.51	74.00	-22.49	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Horizontal

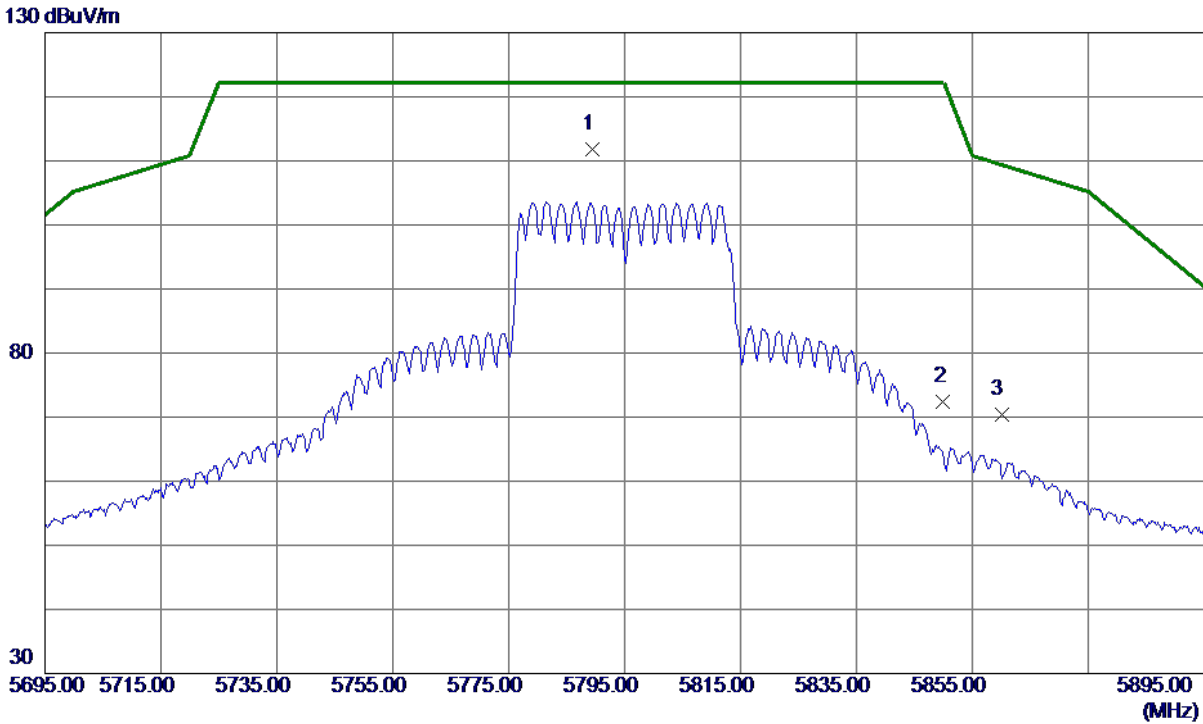


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5789.5000	96.00	15.83	111.83	122.20	-10.37	Peak	No Limit
2	5850.0000	56.51	15.97	72.48	122.20	-49.72	Peak	
3	5860.0000	54.47	16.00	70.47	109.40	-38.93	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Horizontal

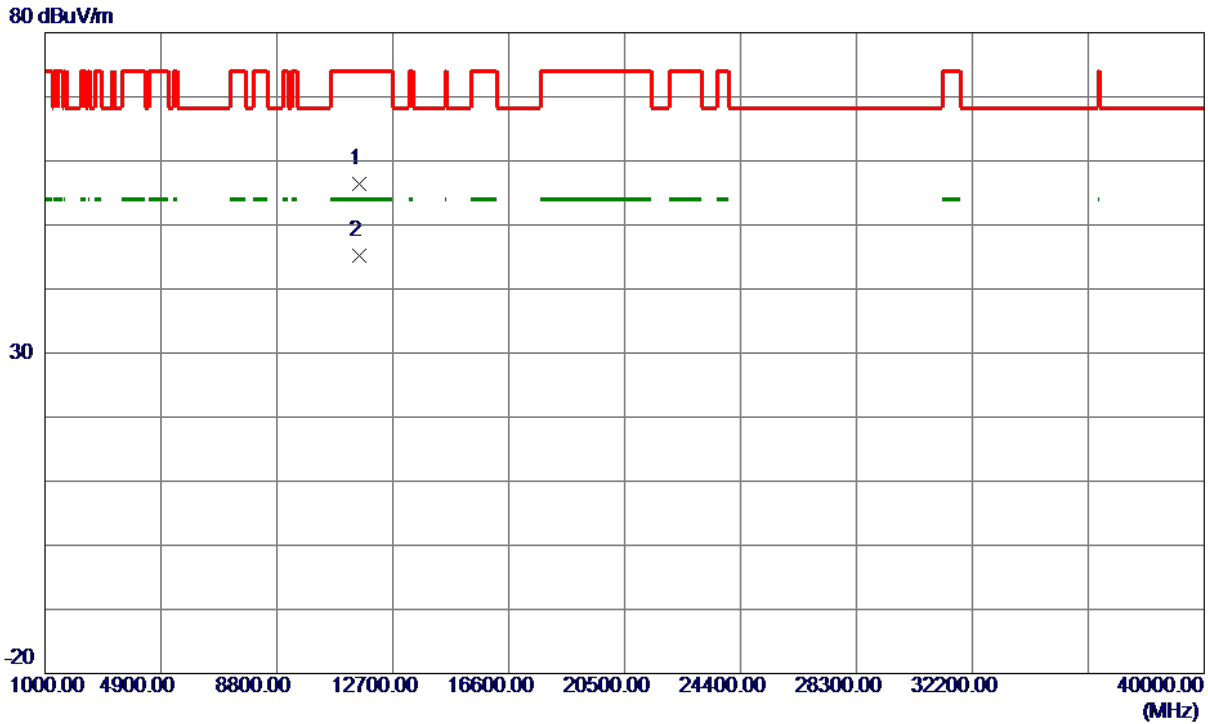

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11588.7750	44.21	12.16	56.37	74.00	-17.63	Peak	
2 *	11589.1250	33.01	12.17	45.18	54.00	-8.82	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Vertical

130 dBuV/m

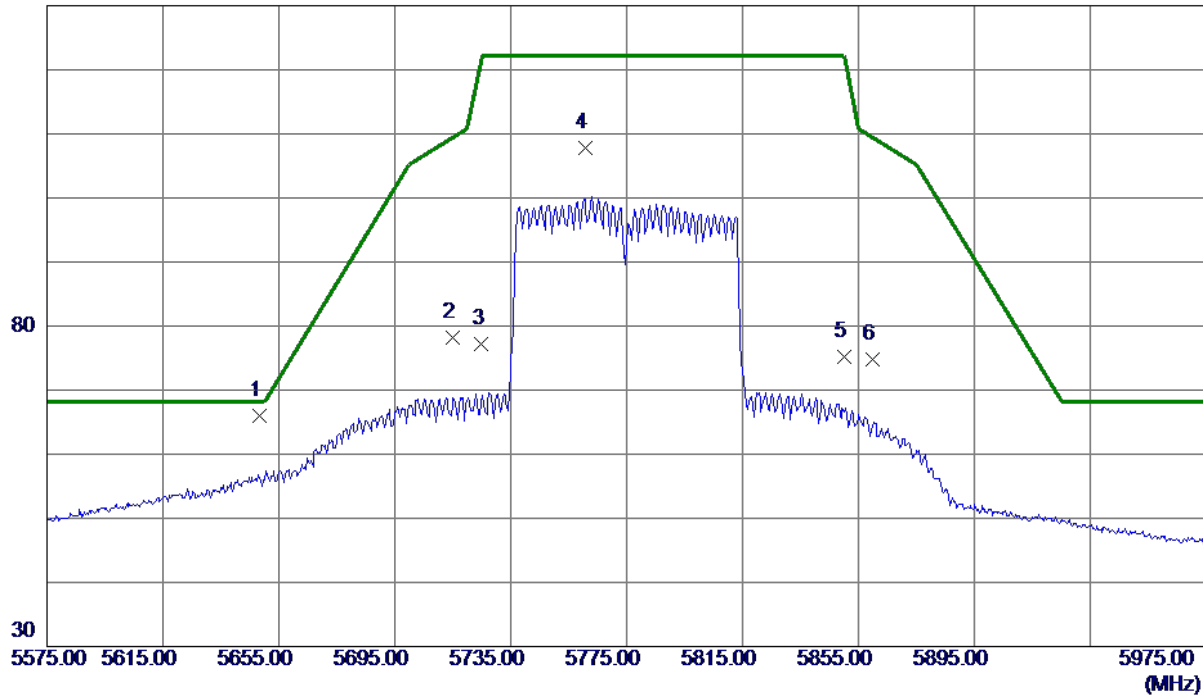

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5648.2000	50.59	15.50	66.09	68.20	-2.11	Peak	
2	5715.0000	62.56	15.65	78.21	109.40	-31.19	Peak	
3	5725.0000	61.48	15.68	77.16	122.20	-45.04	Peak	
4	5760.6000	91.95	15.76	107.71	122.20	-14.49	Peak	No Limit
5	5850.0000	59.17	15.97	75.14	122.20	-47.06	Peak	
6	5860.0000	58.88	16.00	74.88	109.40	-34.52	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Horizontal

130 dBuV/m

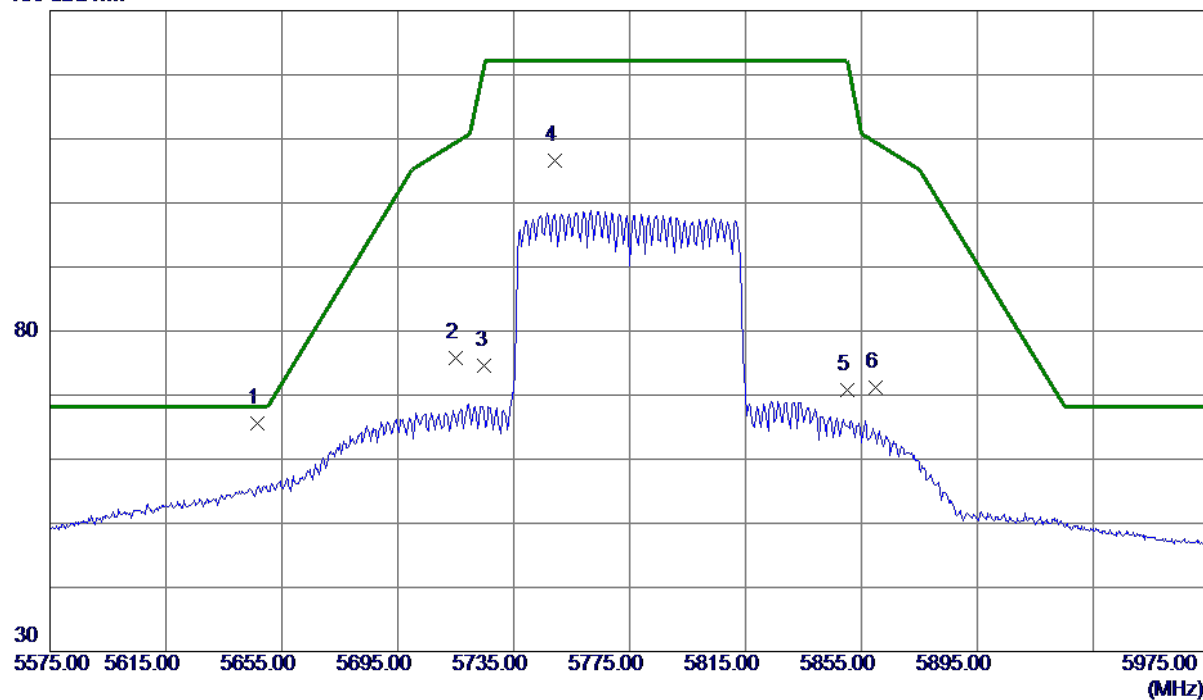

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5646.4000	50.11	15.49	65.60	68.20	-2.60	Peak	
2	5715.0000	60.09	15.65	75.74	109.40	-33.66	Peak	
3	5725.0000	58.91	15.68	74.59	122.20	-47.61	Peak	
4	5749.2000	90.94	15.74	106.68	122.20	-15.52	Peak	No Limit
5	5850.0000	54.76	15.97	70.73	122.20	-51.47	Peak	
6	5860.0000	55.22	16.00	71.22	109.40	-38.18	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Horizontal

80 dBuV/m

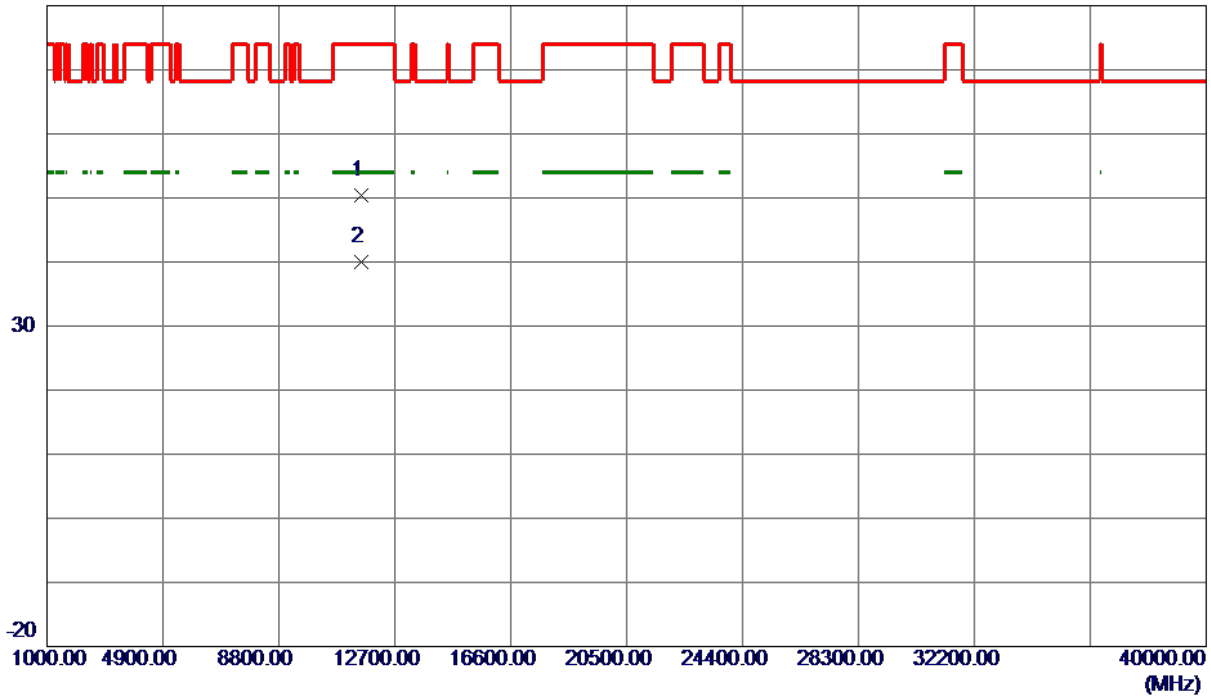

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11556.4250	38.20	12.13	50.33	74.00	-23.67	Peak	
2 *	11558.9250	27.95	12.13	40.08	54.00	-13.92	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Straddle Channel:

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5720 MHz

Vertical

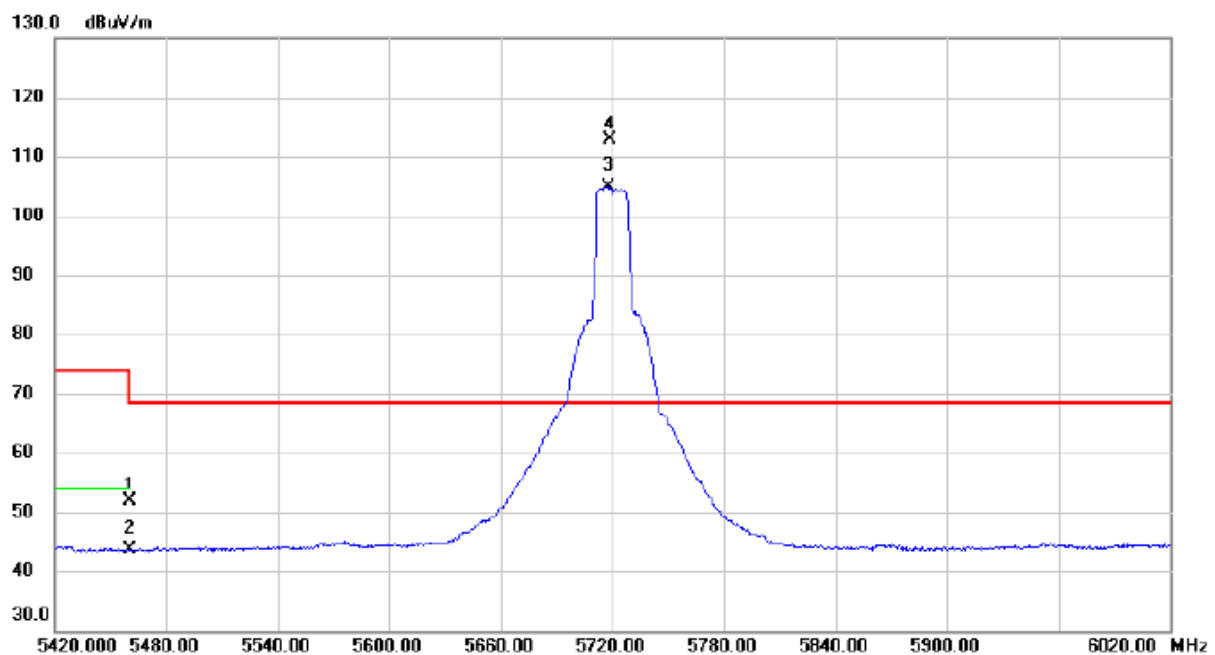


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	36.75	15.06	51.81	74.00	-22.19	peak	
2		5460.000	28.49	15.06	43.55	54.00	-10.45	AVG	
3	X	5717.900	89.19	15.66	104.85	68.30	36.55	AVG	
4	*	5718.500	97.32	15.66	112.98	68.30	44.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-2C_TX A Mode 5720 MHz

Horizontal

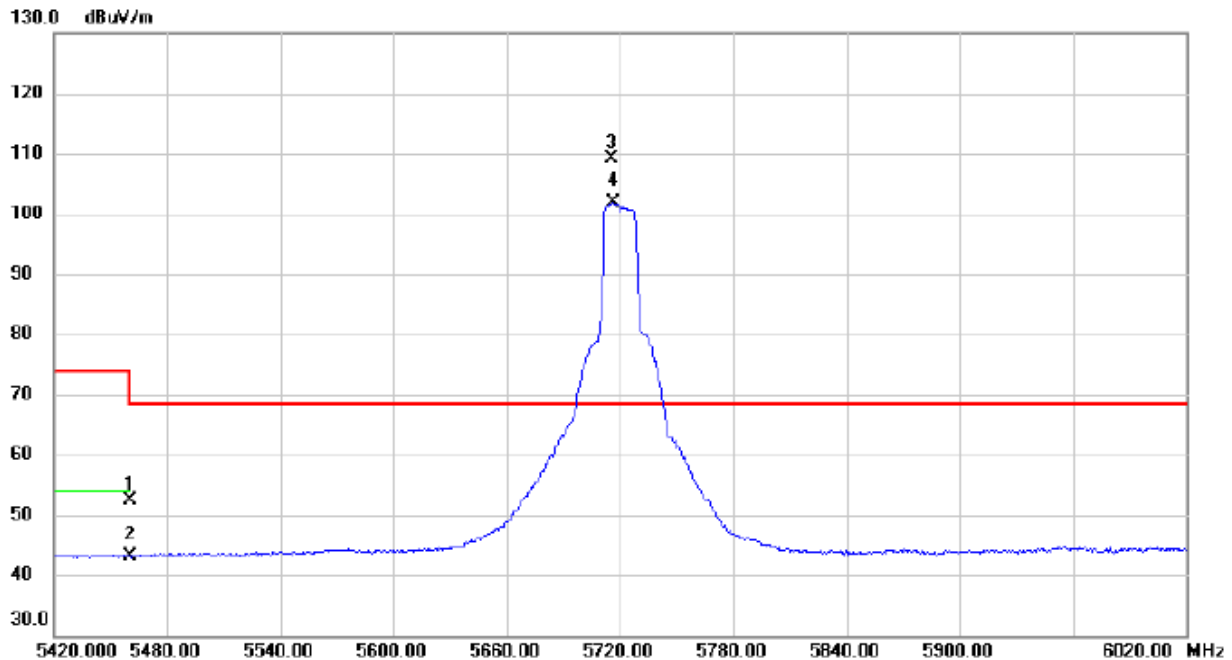


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	37.23	15.06	52.29	74.00	-21.71	peak	
2		5460.000	28.07	15.06	43.13	54.00	-10.87	AVG	
3	*	5715.500	93.59	15.65	109.24	68.30	40.94	peak	
4	X	5716.700	86.19	15.65	101.84	68.30	33.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5720 MHz

Vertical

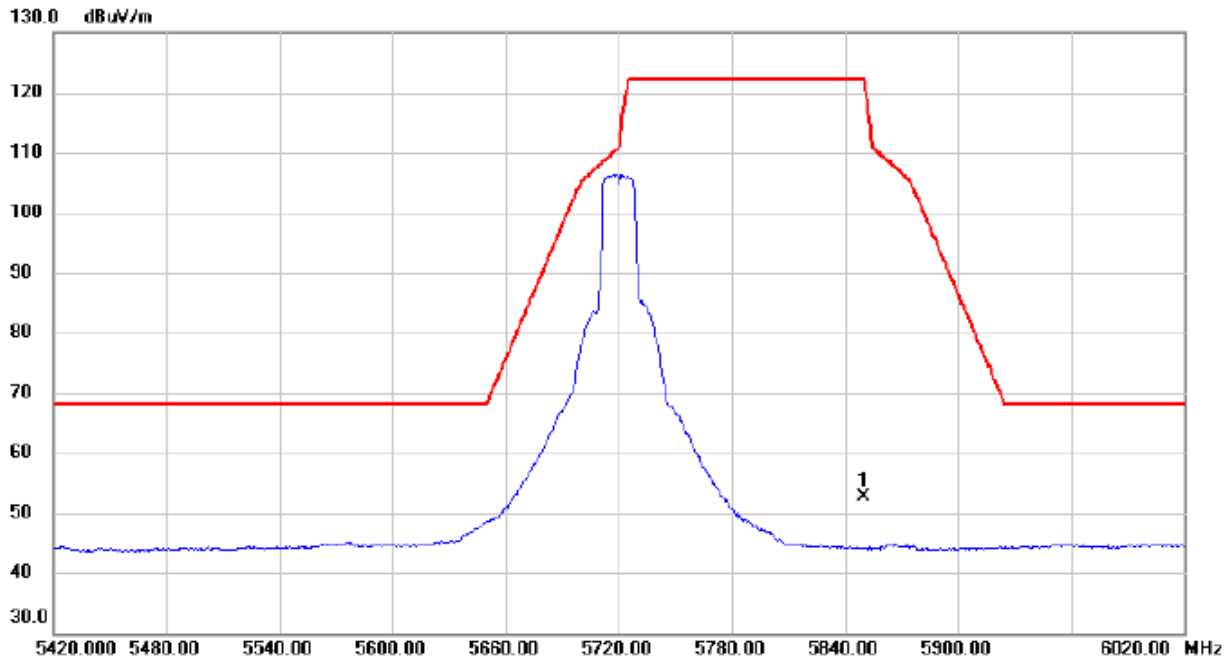


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5850.000	36.63	15.98	52.61	122.20	-69.59	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5720 MHz

Horizontal

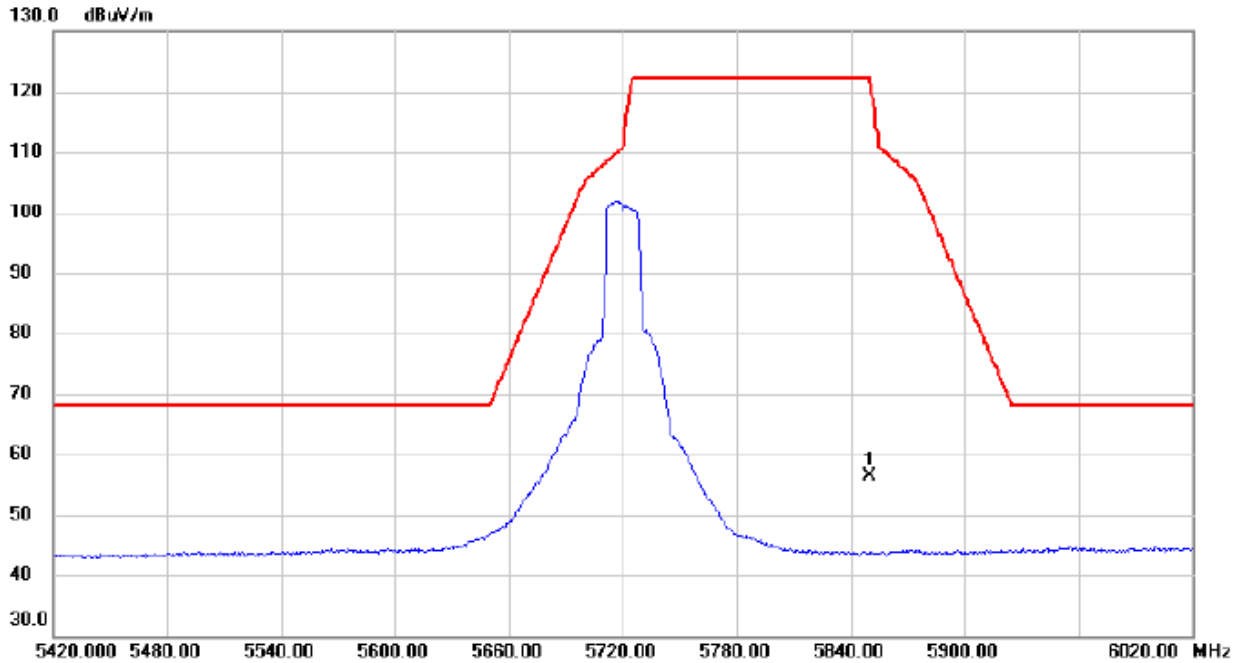


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5850.200	40.44	15.98	56.42	121.74	-65.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5720 MHz

Vertical

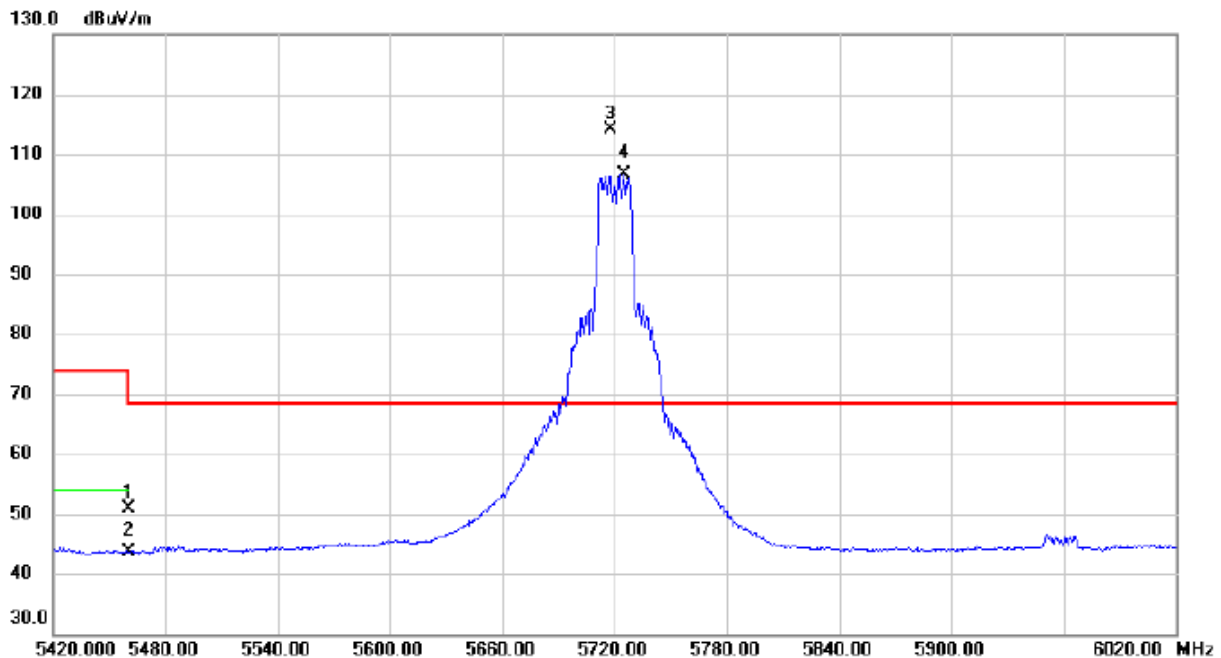


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	35.92	15.06	50.98	74.00	-23.02	peak	
2		5460.000	28.61	15.06	43.67	54.00	-10.33	AVG	
3	*	5717.600	98.57	15.66	114.23	68.30	45.93	peak	
4	X	5725.100	91.07	15.67	106.74	68.30	38.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT20) Mode 5720 MHz

Horizontal

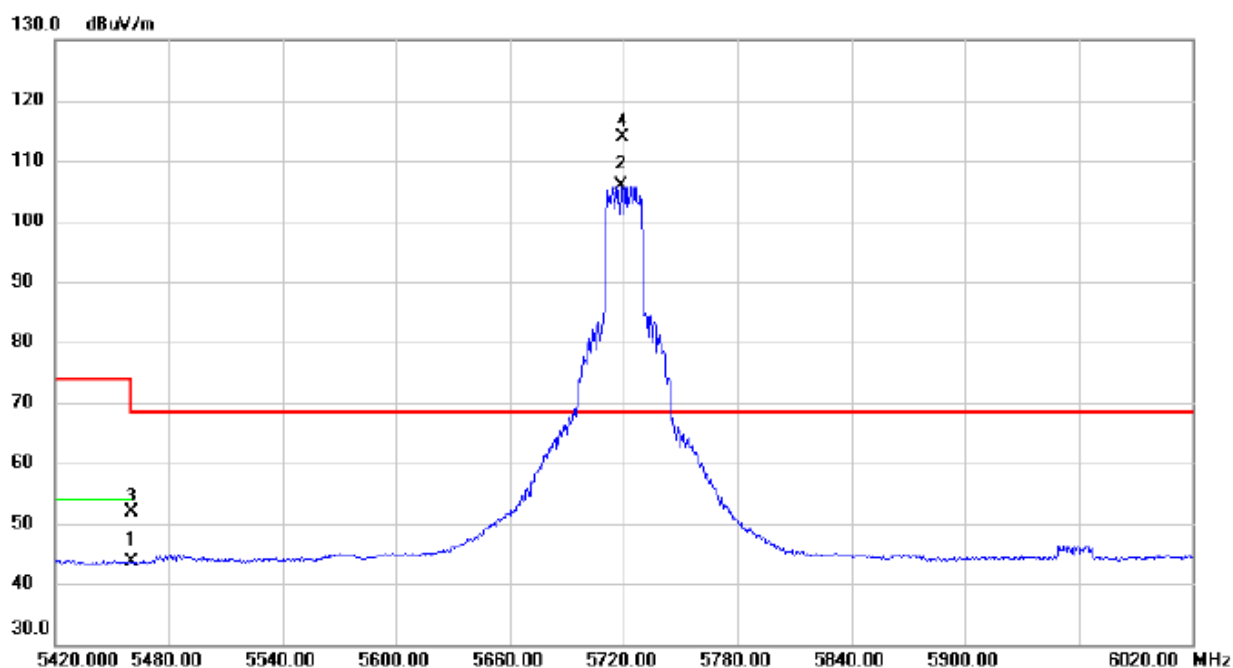


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	28.58	15.06	43.64	54.00	-10.36	AVG	
2	X	5719.100	90.22	15.66	105.88	68.30	37.58	AVG	
3		5460.000	36.85	15.06	51.91	74.00	-22.09	peak	
4	*	5719.400	98.13	15.66	113.79	68.30	45.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5720 MHz

Vertical

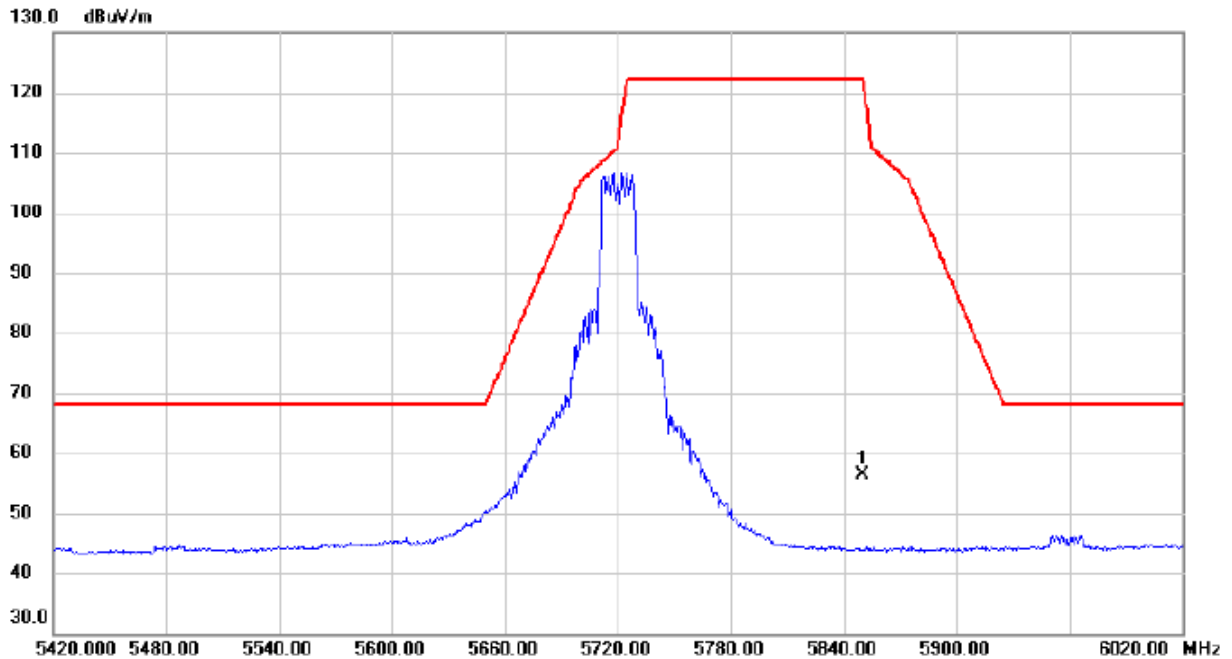


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5850.000	40.39	15.98	56.37	122.20	-65.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5720 MHz

Horizontal

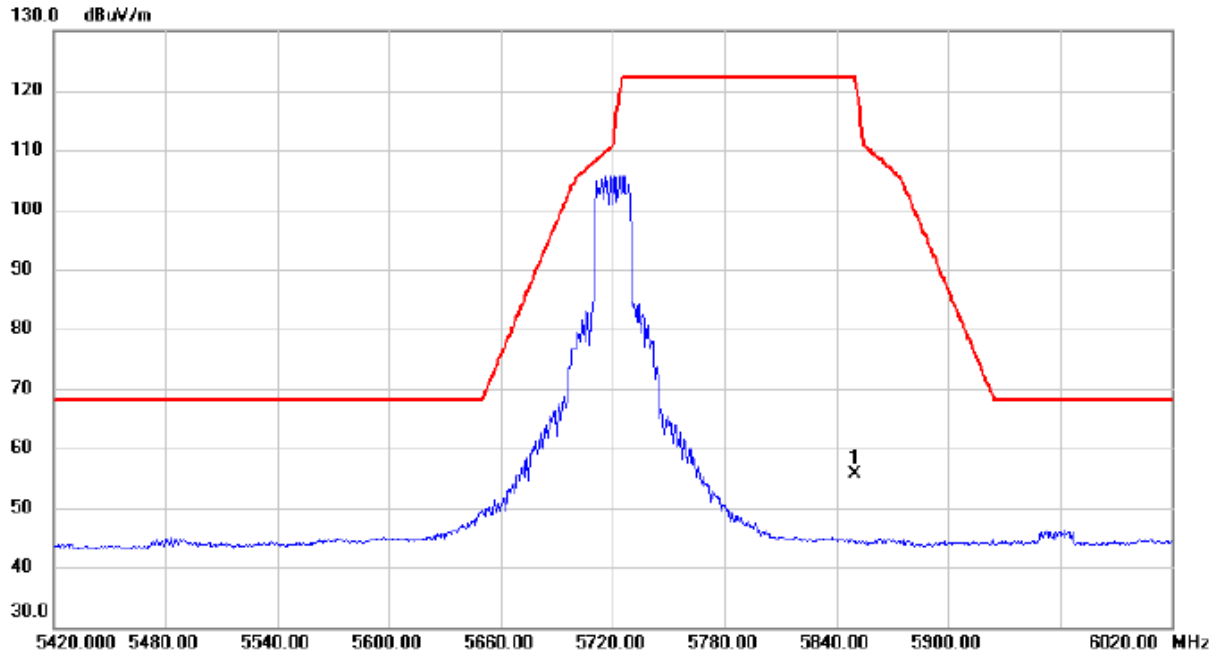


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5850.000	39.67	15.98	55.65	122.20	-66.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5710 MHz

Vertical

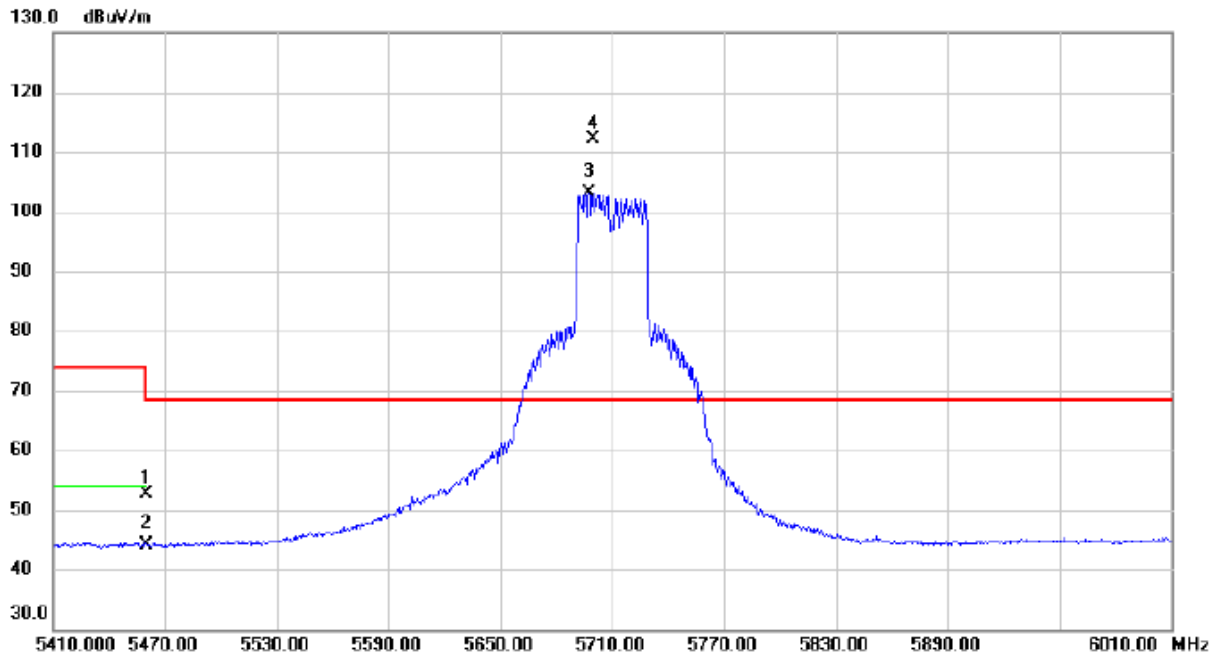


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	37.49	15.06	52.55	74.00	-21.45	peak	
2		5460.000	28.99	15.06	44.05	54.00	-9.95	AVG	
3	X	5697.400	87.57	15.61	103.18	68.30	34.88	AVG	
4	*	5700.100	96.55	15.61	112.16	68.30	43.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-2C_TX N (HT40) Mode 5710 MHz

Horizontal

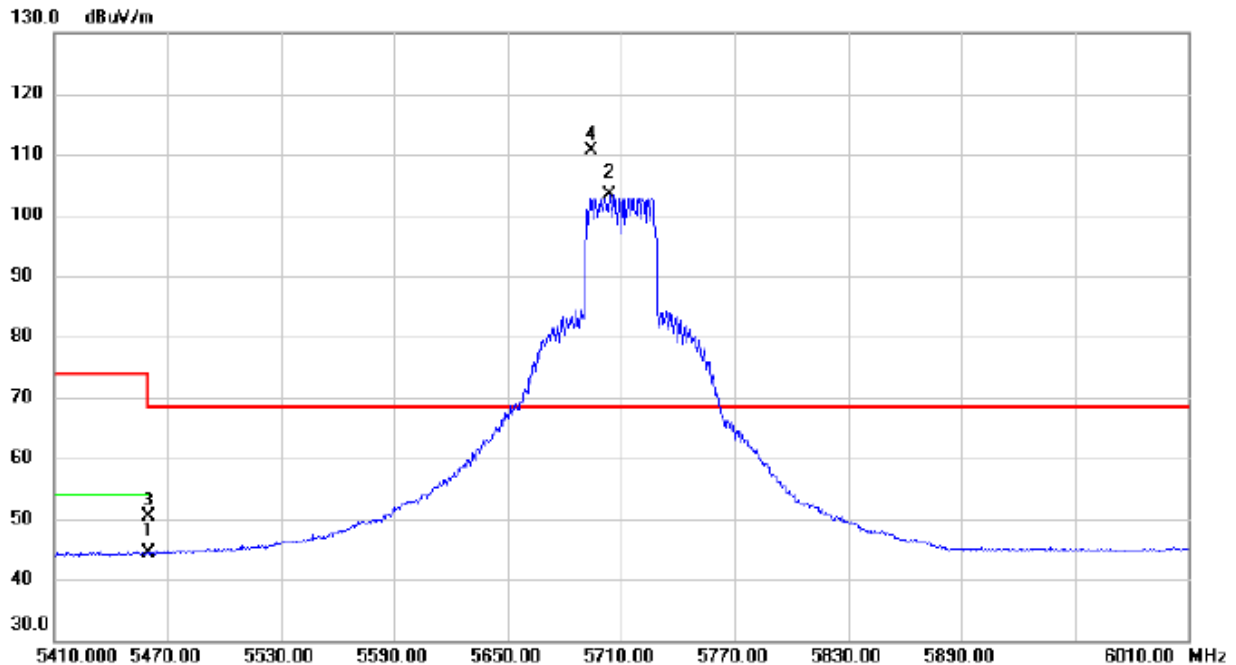


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	29.31	15.06	44.37	54.00	-9.63	AVG	
2	X	5704.000	87.64	15.63	103.27	68.30	34.97	AVG	
3		5460.000	35.31	15.06	50.37	74.00	-23.63	peak	
4	*	5694.100	94.93	15.61	110.54	68.30	42.24	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5710 MHz

Vertical

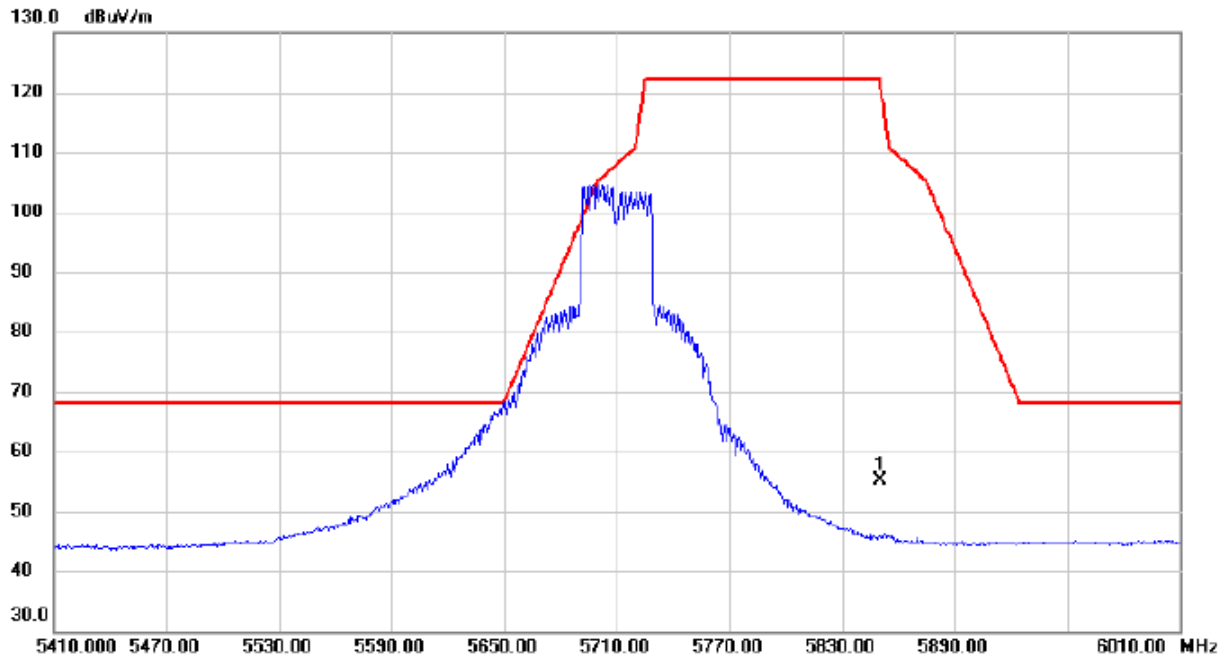


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5850.000	39.04	15.98	55.02	122.20	-67.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5710 MHz

Horizontal

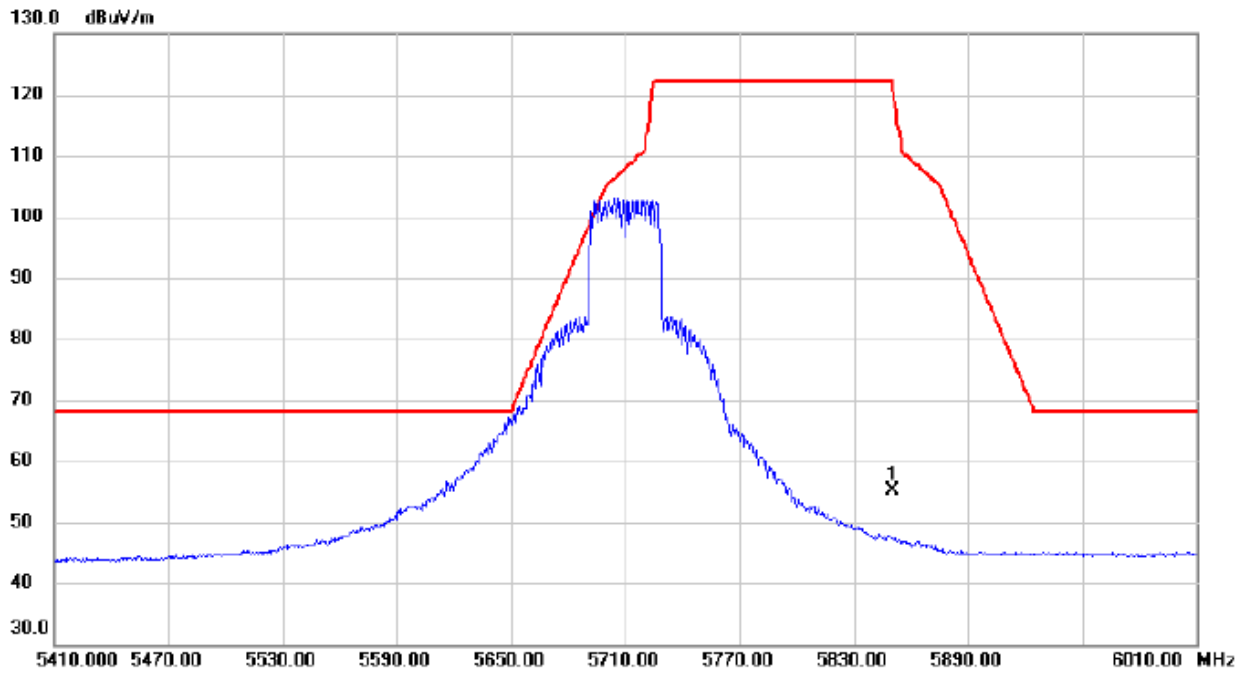


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5850.000	39.06	15.98	55.04	122.20	-67.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5720 MHz

Vertical

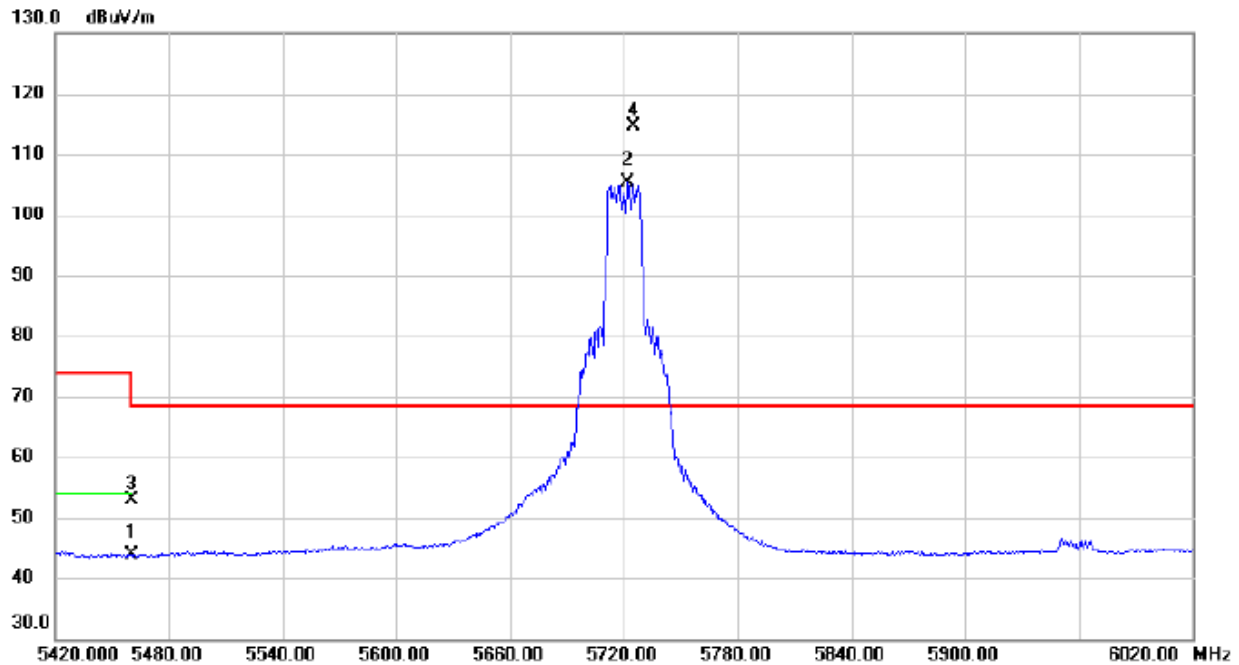


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	28.78	15.06	43.84	54.00	-10.16	AVG	
2	X	5722.400	89.62	15.66	105.28	68.30	36.98	AVG	
3		5460.000	37.81	15.06	52.87	74.00	-21.13	peak	
4	*	5725.100	98.85	15.67	114.52	68.30	46.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5720 MHz

Horizontal

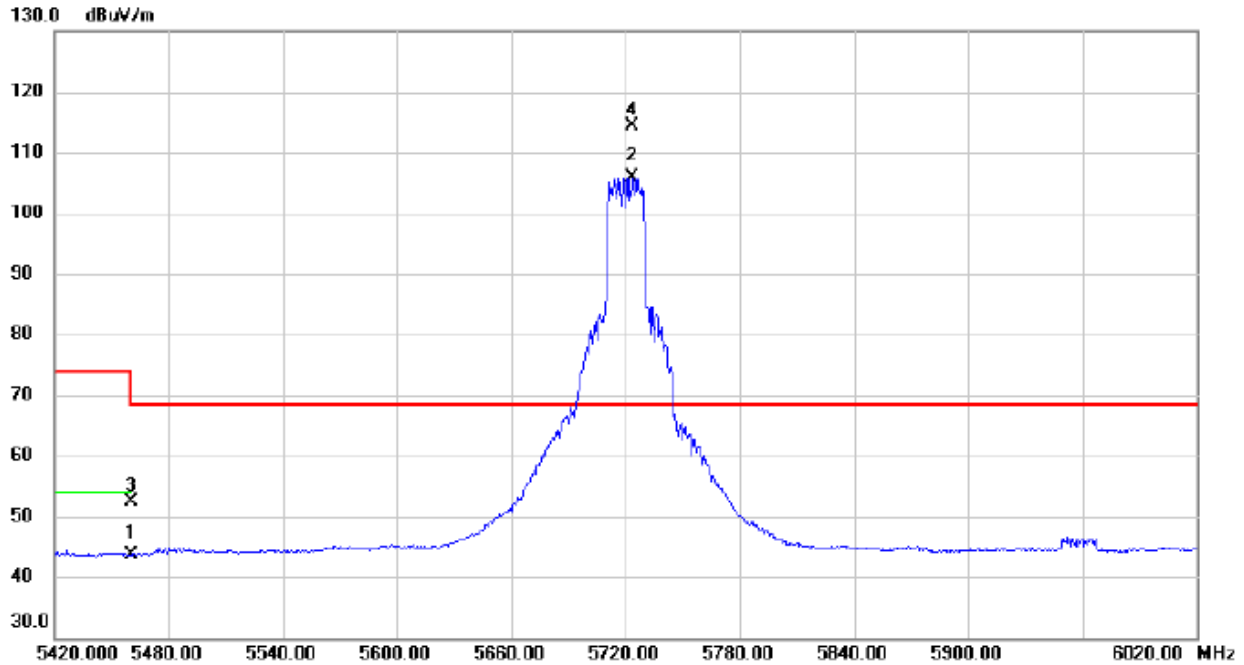


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	28.62	15.06	43.68	54.00	-10.32	AVG	
2	X	5723.900	90.12	15.67	105.79	68.30	37.49	AVG	
3		5460.000	37.30	15.06	52.36	74.00	-21.64	peak	
4	*	5723.900	98.79	15.67	114.46	68.30	46.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5720 MHz

Vertical

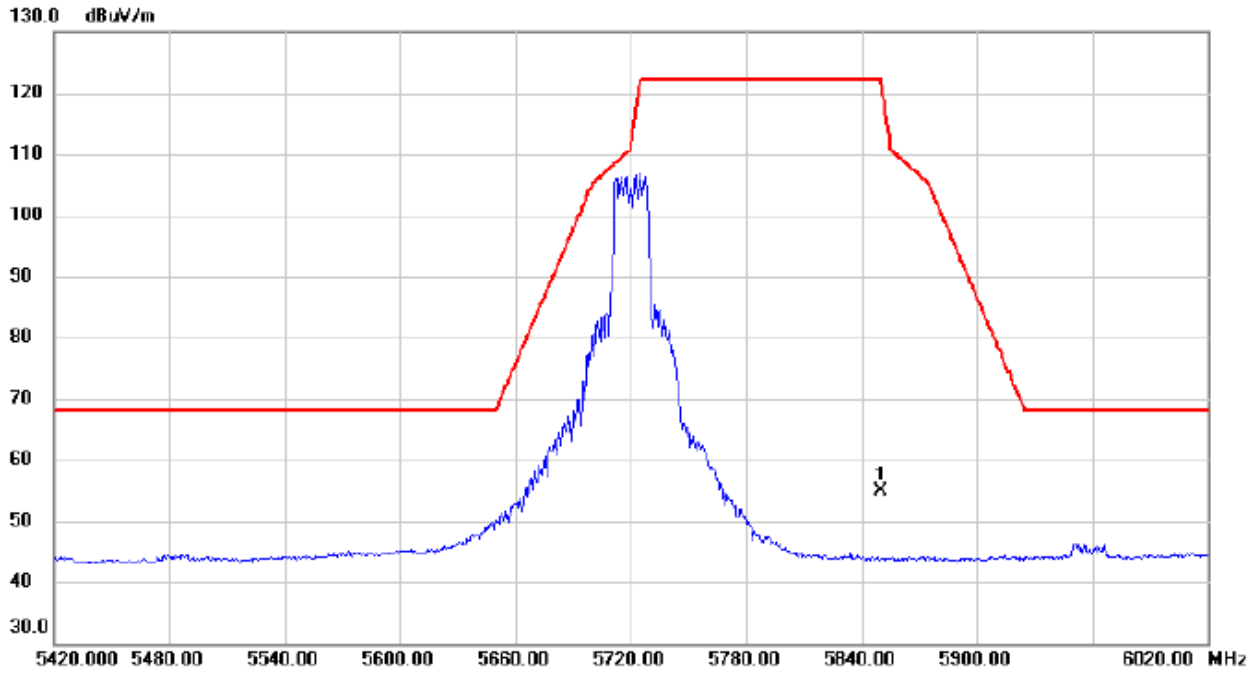


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5850.000	38.93	15.98	54.91	122.20	-67.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5720 MHz

Horizontal

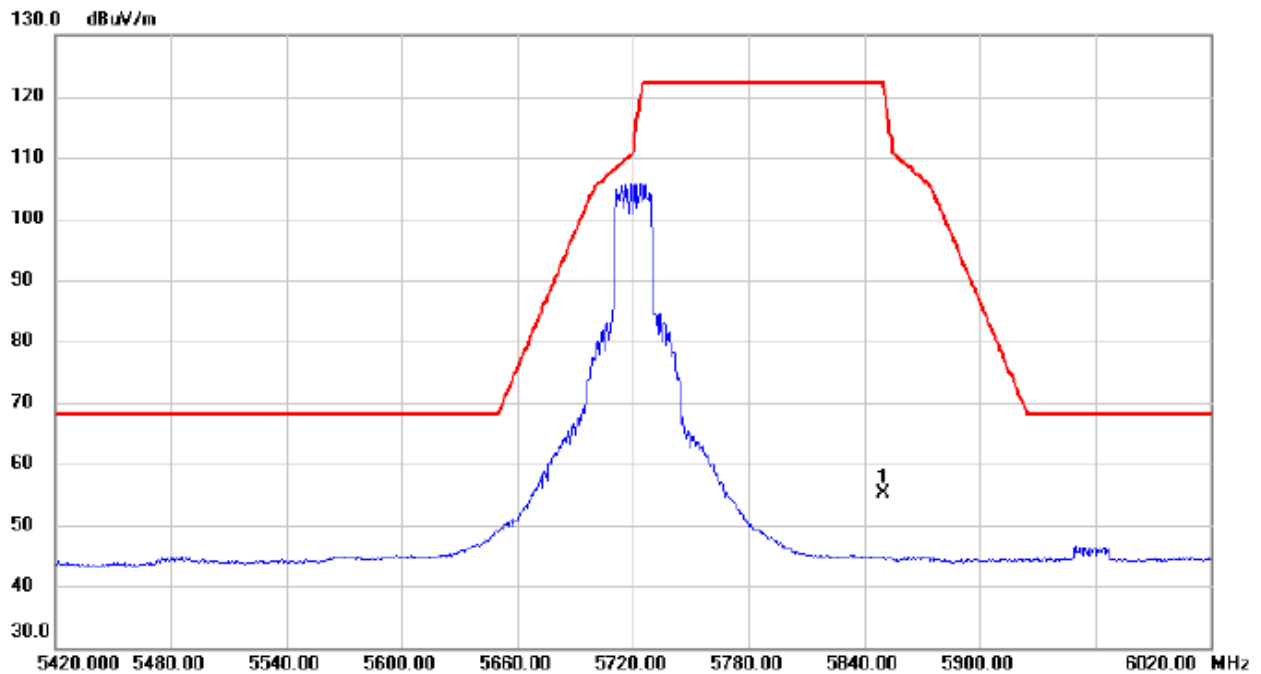


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5850.000	39.18	15.98	55.16	122.20	-67.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5710 MHz

Vertical

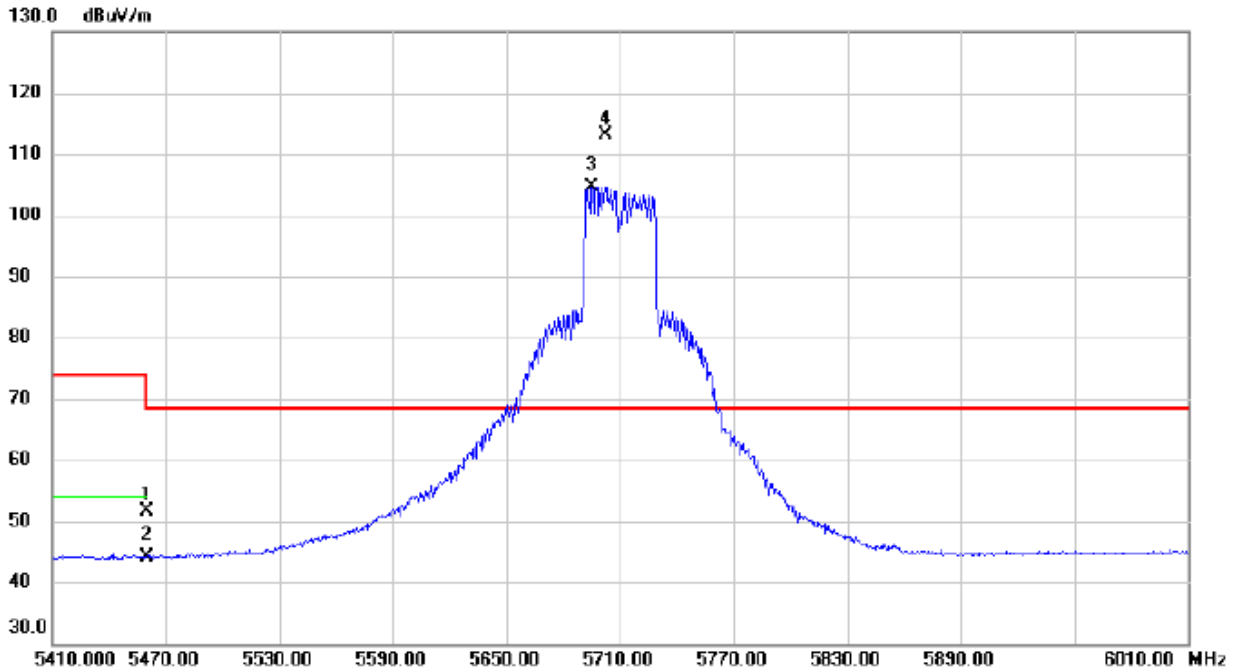


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	36.62	15.06	51.68	74.00	-22.32	peak	
2		5460.000	29.19	15.06	44.25	54.00	-9.75	AVG	
3	X	5695.000	89.11	15.61	104.72	68.30	36.42	AVG	
4	*	5702.500	97.48	15.63	113.11	68.30	44.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5710 MHz

Horizontal

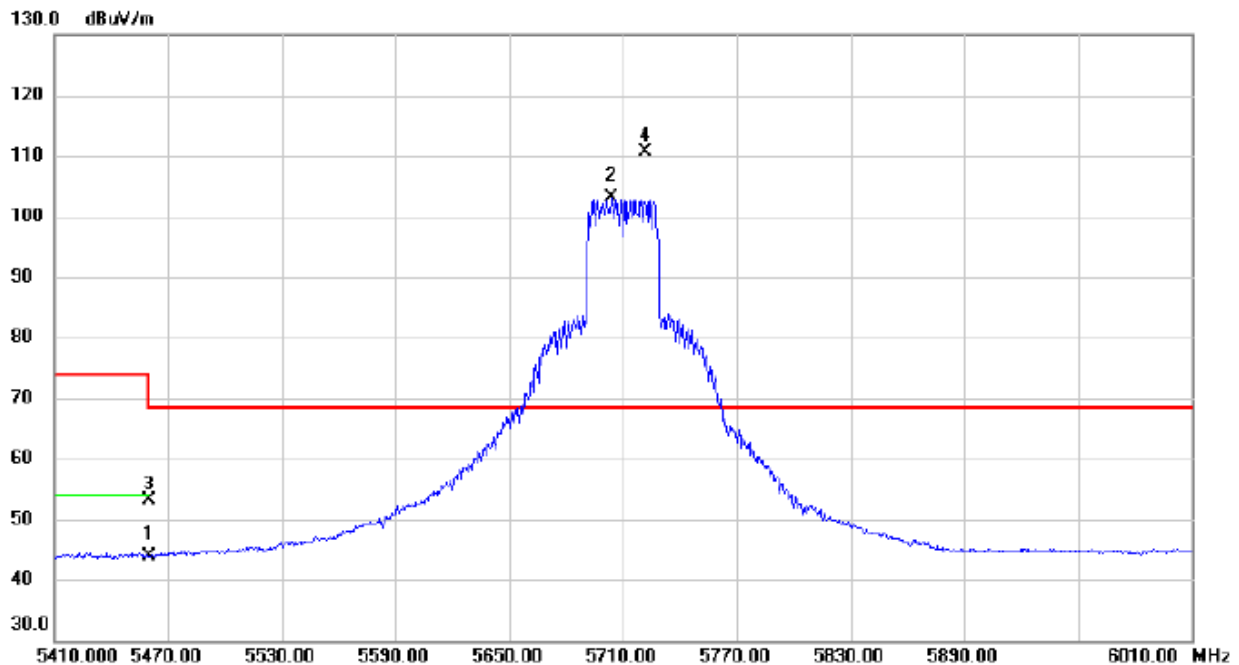


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	28.83	15.06	43.89	54.00	-10.11	AVG	
2	X	5704.000	87.42	15.63	103.05	68.30	34.75	AVG	
3		5460.000	38.03	15.06	53.09	74.00	-20.91	peak	
4	*	5721.700	94.93	15.66	110.59	68.30	42.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5710 MHz

Vertical

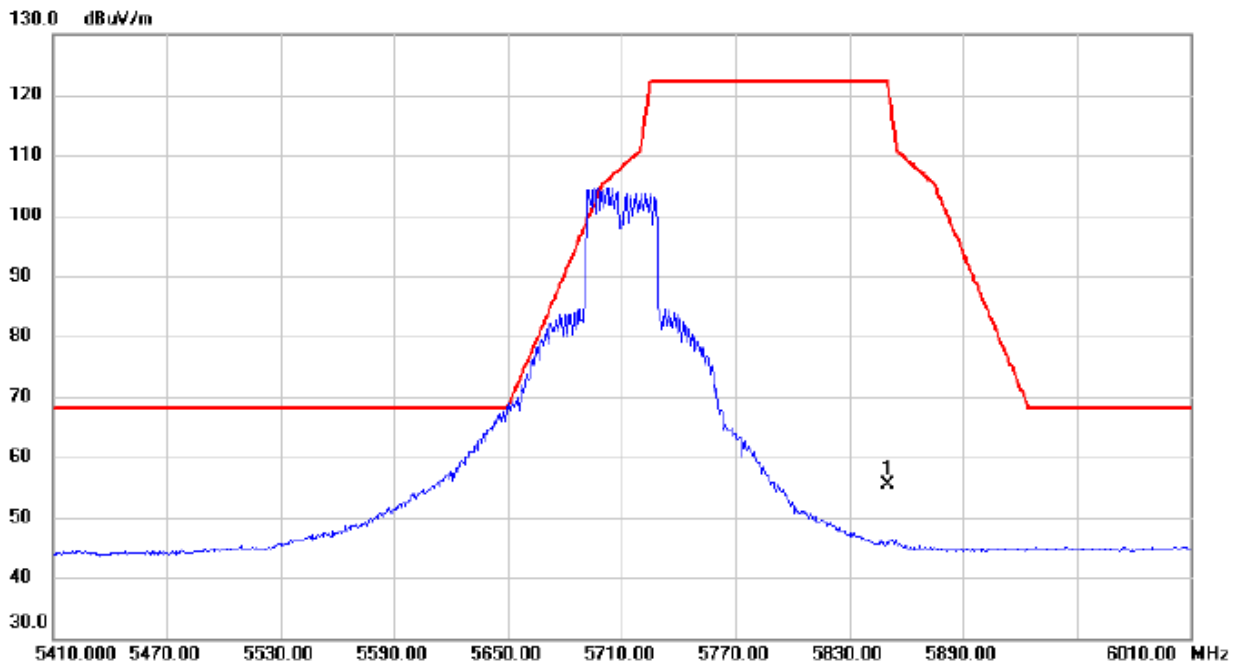


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5850.000	39.41	15.98	55.39	122.20	-66.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5710 MHz

Horizontal

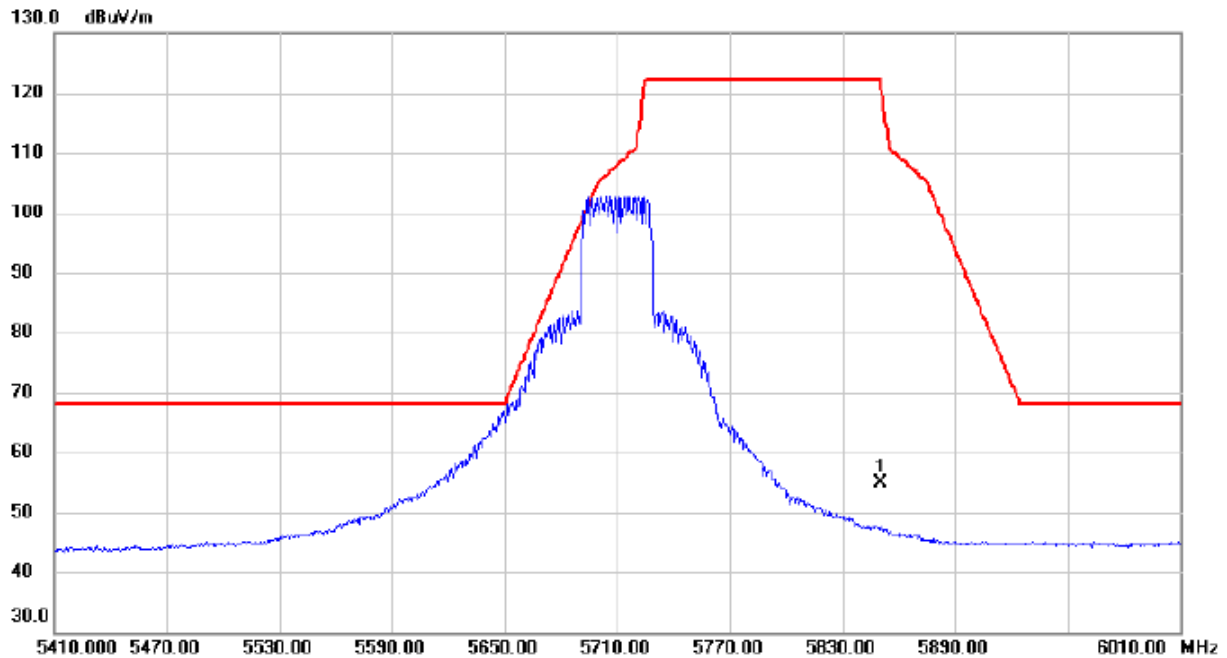


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5850.000	38.87	15.98	54.85	122.20	-67.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5690 MHz

Vertical

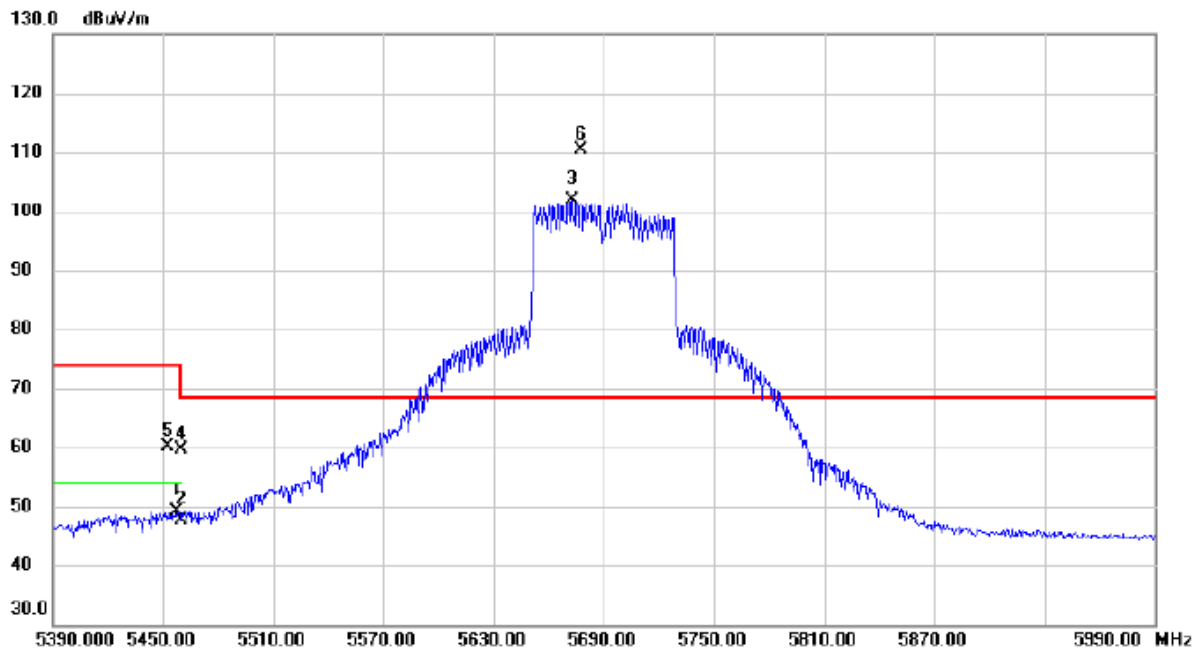


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5457.500	34.05	15.04	49.09	54.00	-4.91	AVG	
2		5460.000	32.51	15.06	47.57	54.00	-6.43	AVG	
3	X	5672.600	86.32	15.56	101.88	68.30	33.58	AVG	
4		5460.000	44.54	15.06	59.60	74.00	-14.40	peak	
5		5452.700	44.98	15.03	60.01	74.00	-13.99	peak	
6	*	5677.700	94.91	15.57	110.48	68.30	42.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5690 MHz

Horizontal

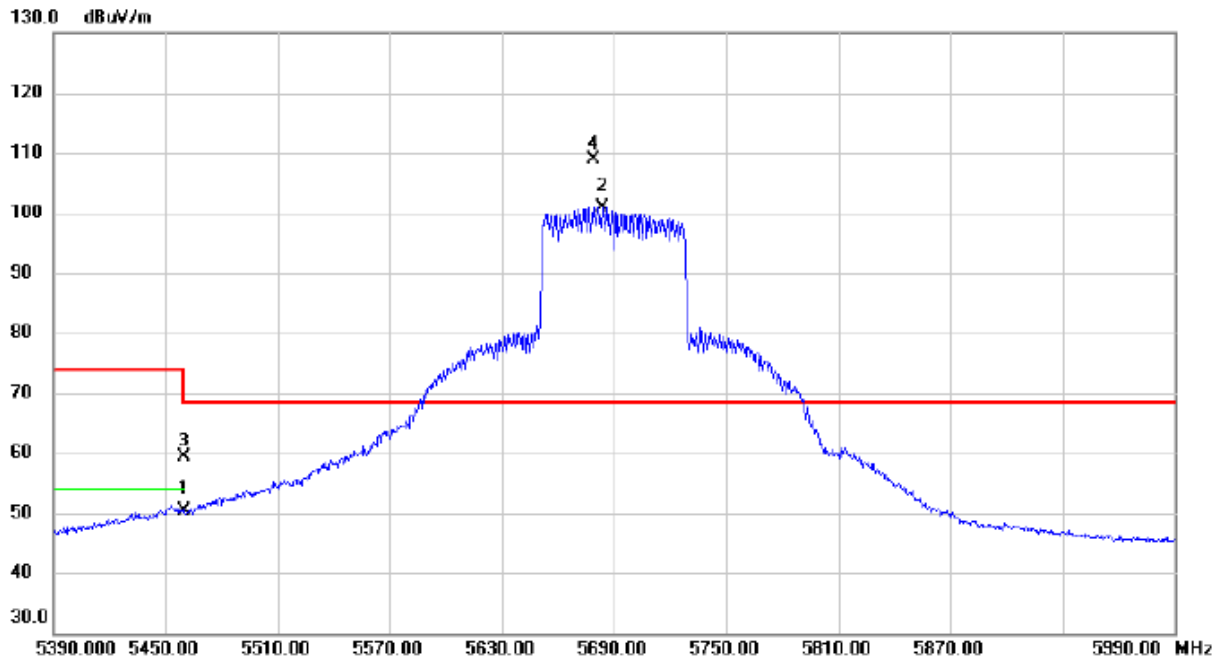


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	35.28	15.06	50.34	54.00	-3.66	AVG	
2	X	5684.000	85.34	15.59	100.93	68.30	32.63	AVG	
3		5460.000	44.40	15.06	59.46	74.00	-14.54	peak	
4	*	5678.900	93.25	15.58	108.83	68.30	40.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5690 MHz

Vertical

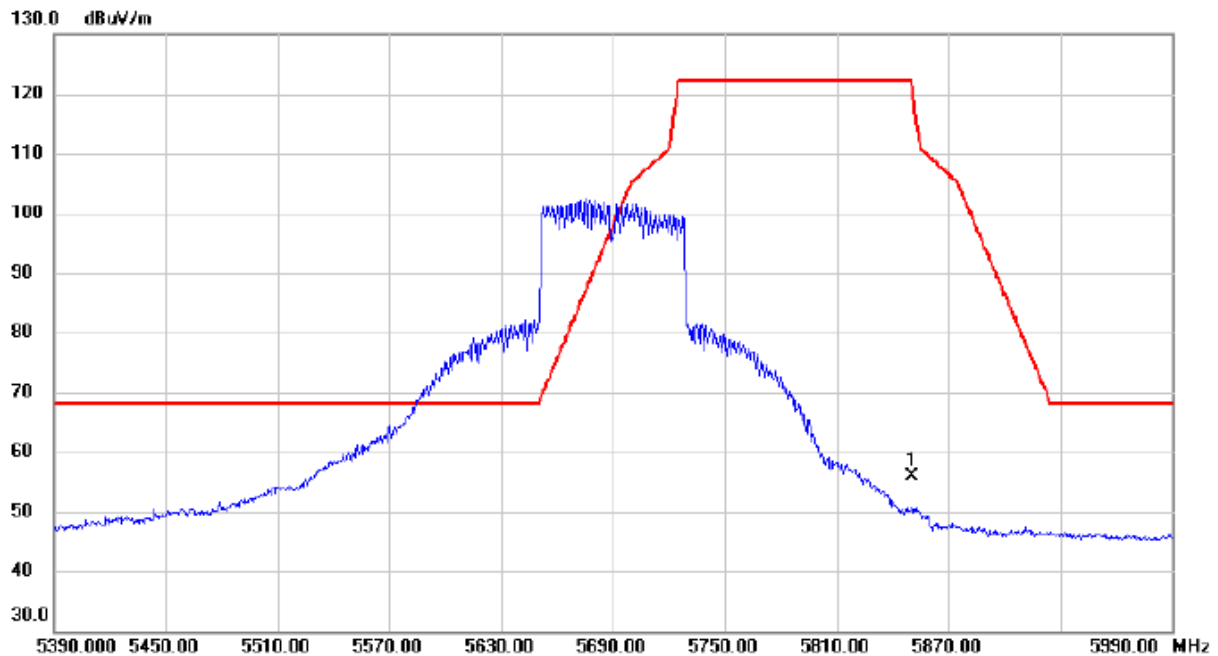


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5850.000	39.83	15.98	55.81	122.20	-66.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5690 MHz

Horizontal

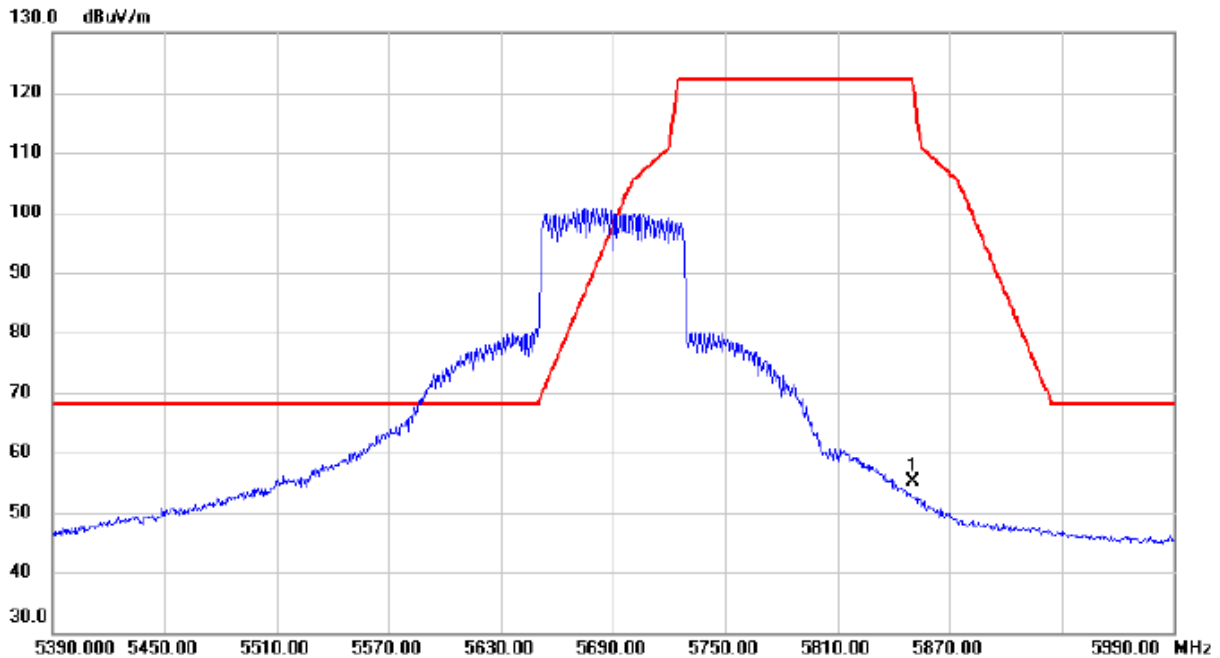


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5850.000	39.20	15.98	55.18	122.20	-67.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) Straddle channels 138, 142 and 144 are considered to be operating in both U-NII-2C and U-NII-3. The worst case out-of-band emission limit, i.e., -27 dBm/MHz peak EIRP, applies at the band edges. The band edges are considered to be 5.47 GHz and 5.85 GHz.

Orthogonal Axis	X
Test Mode	TX A Mode 5720 MHz

Vertical

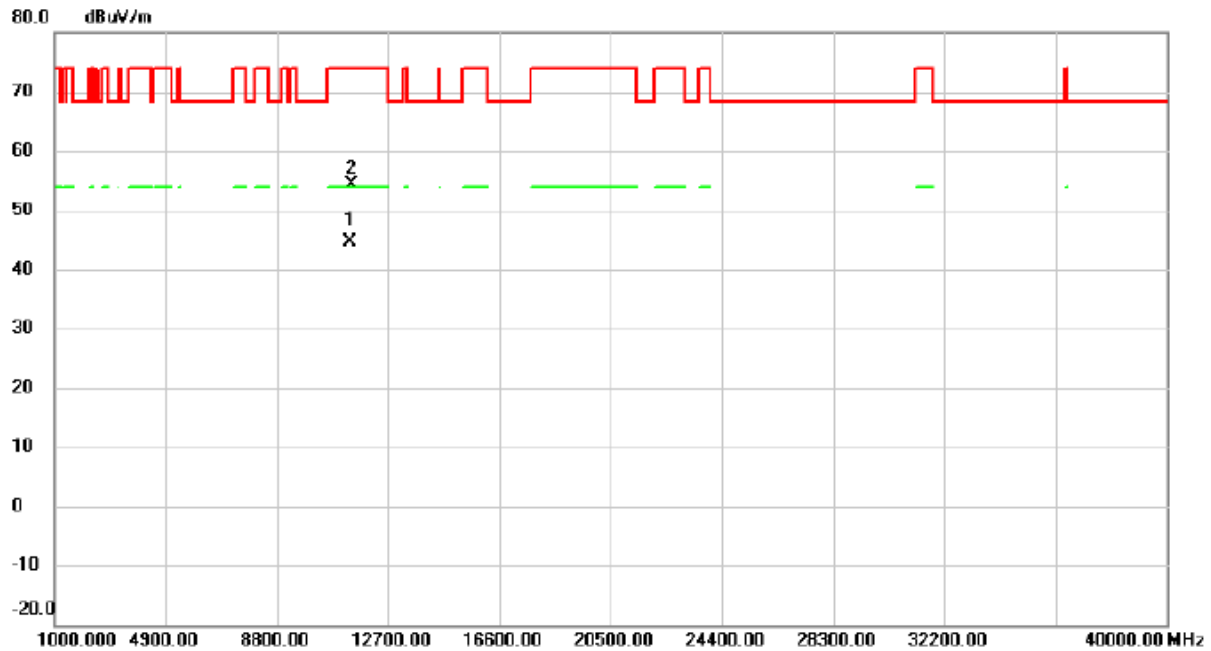

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11397.800	32.54	11.98	44.52	54.00	-9.48	AVG	
2		11431.500	42.35	12.01	54.36	74.00	-19.64	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX A Mode 5720 MHz

Horizontal

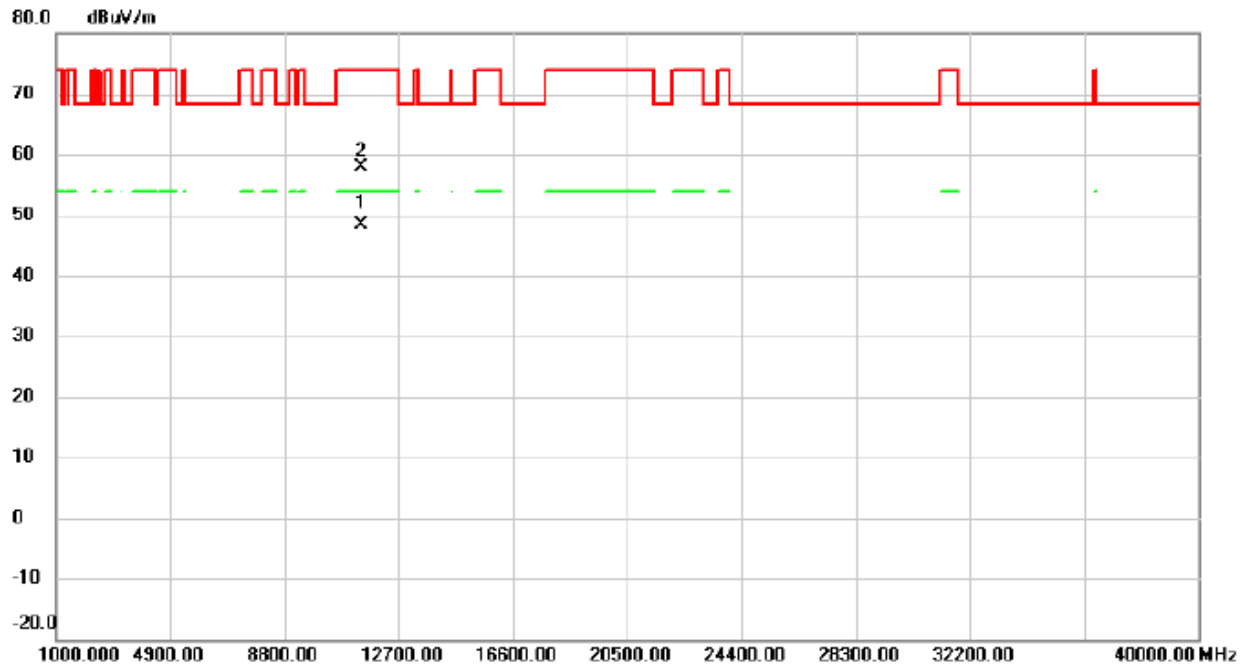


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11403.550	36.35	11.98	48.33	54.00	-5.67	AVG	
2		11404.400	45.98	11.98	57.96	74.00	-16.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX N (HT20) Mode 5720 MHz

Vertical

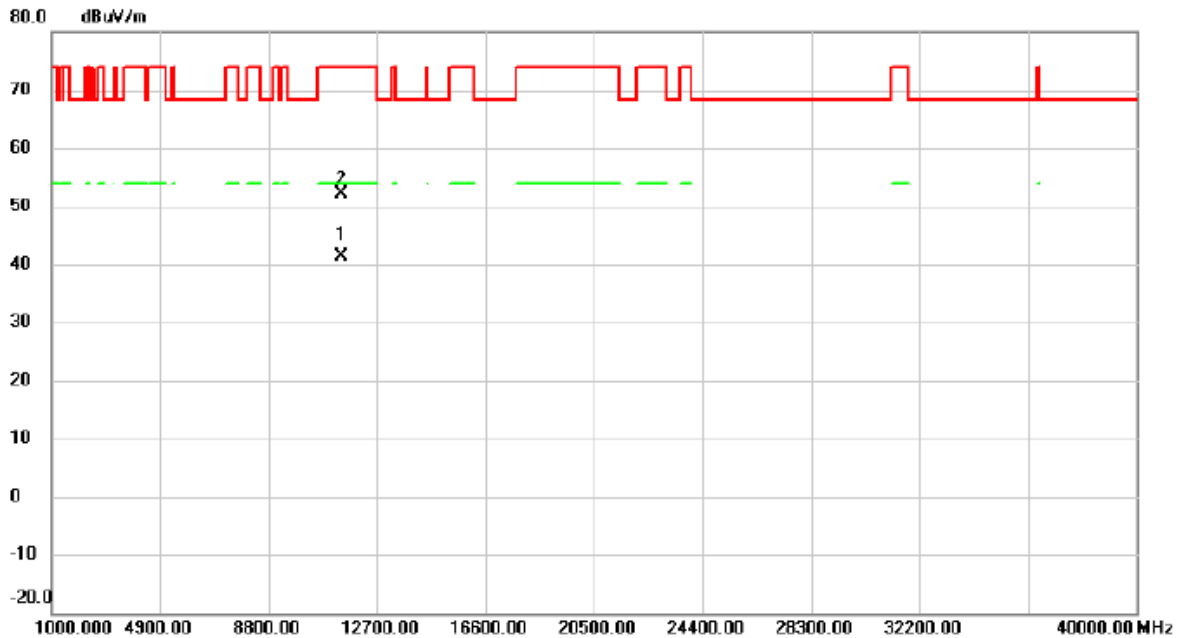


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11402.100	29.35	11.98	41.33	54.00	-12.67	AVG	
2		11403.650	40.25	11.98	52.23	74.00	-21.77	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX N (HT20) Mode 5720 MHz

Horizontal

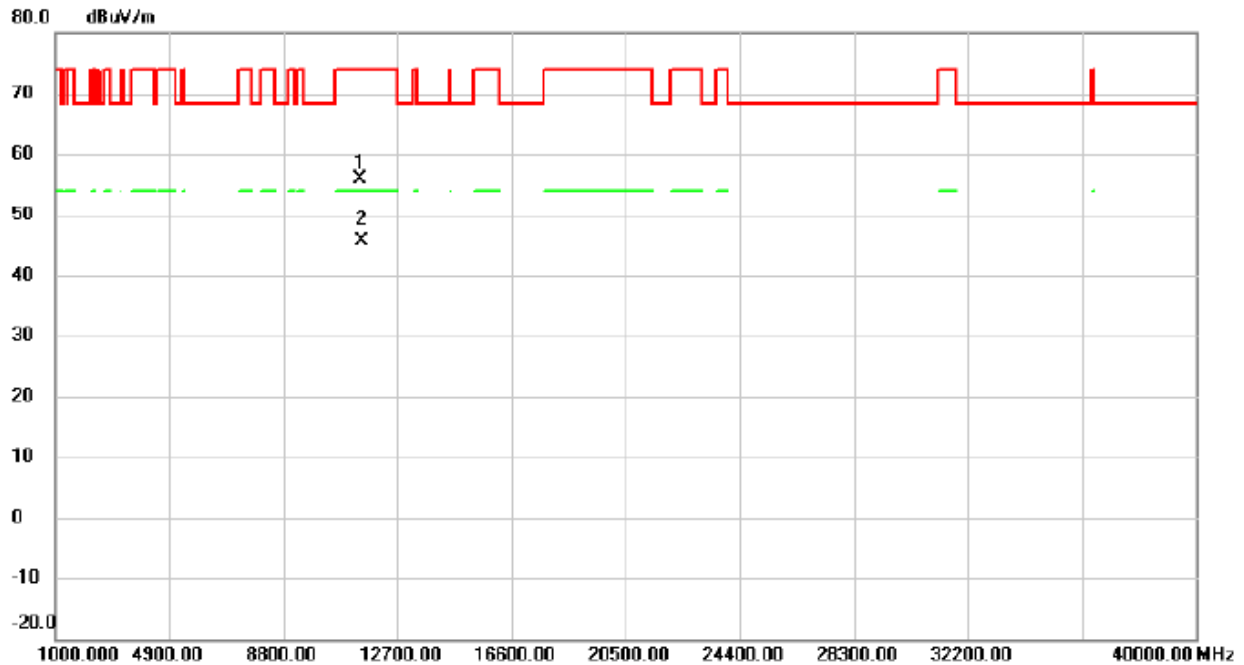


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.500	43.98	12.02	56.00	74.00	-18.00	peak	
2	*	11458.575	33.56	12.04	45.60	54.00	-8.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX N (HT40) Mode 5710 MHz

Vertical

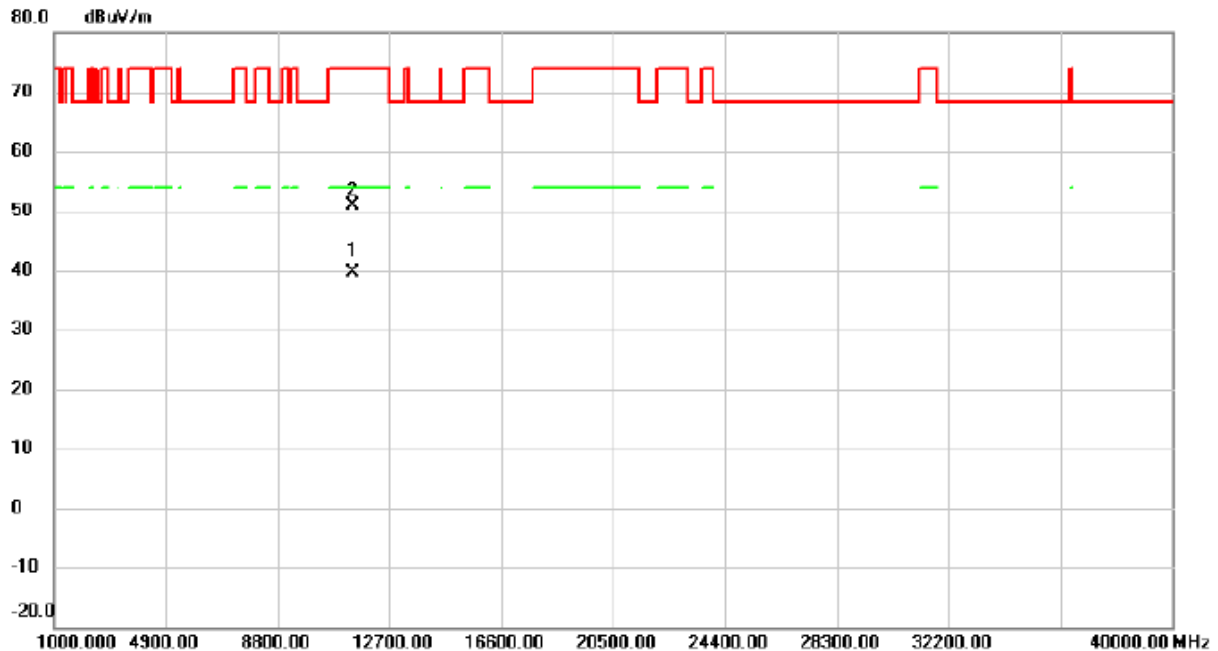


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11400.750	27.68	11.98	39.66	54.00	-14.34	AVG	
2		11442.925	38.79	12.03	50.82	74.00	-23.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX N (HT40) Mode 5710 MHz

Horizontal

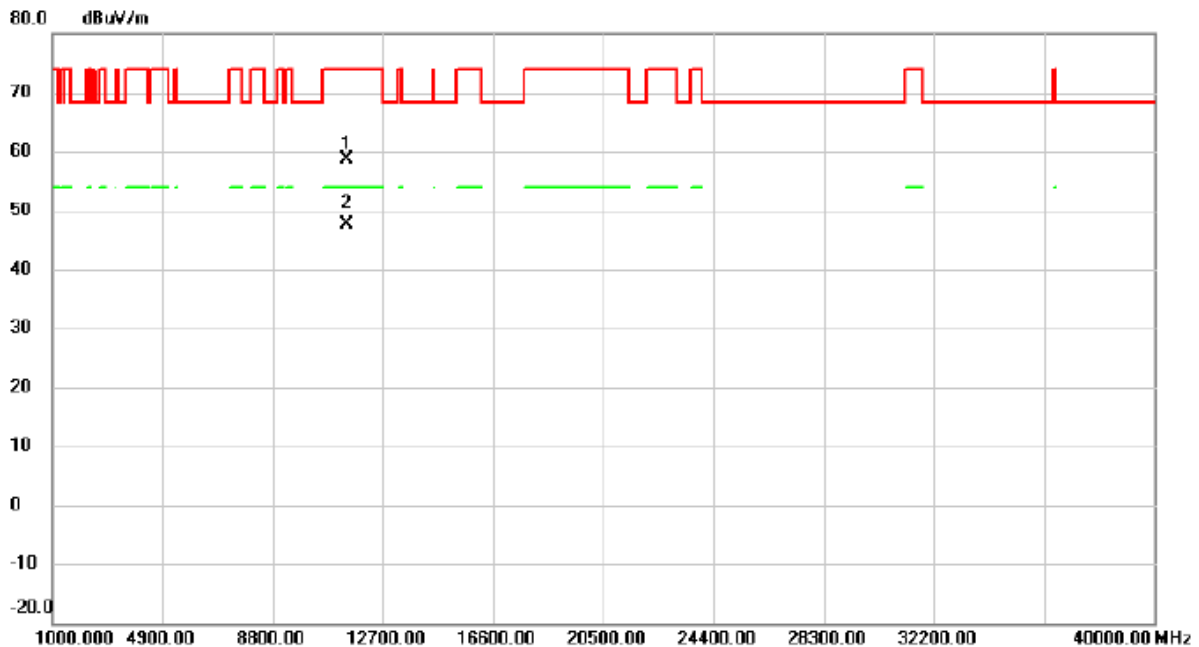


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11402.350	46.74	11.98	58.72	74.00	-15.28	peak	
2	*	11402.800	35.54	11.98	47.52	54.00	-6.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AC (VHT20) Mode 5720 MHz

Vertical

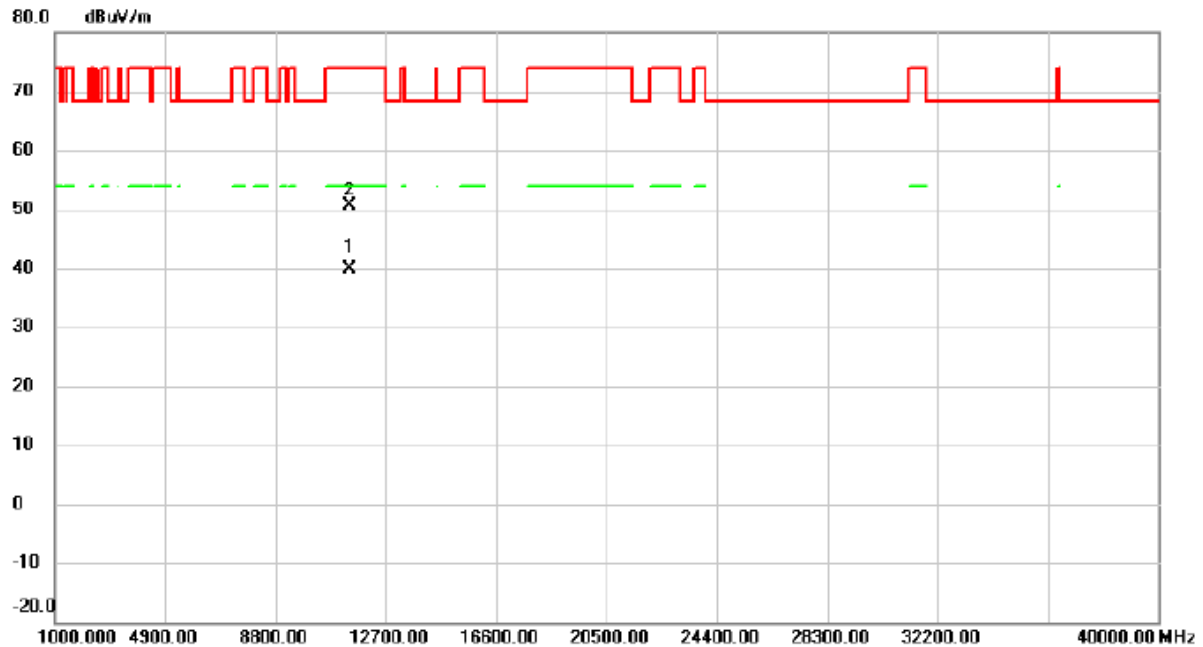


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11420.900	27.98	12.00	39.98	54.00	-14.02	AVG	
2		11434.175	38.65	12.02	50.67	74.00	-23.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AC (VHT20) Mode 5720 MHz

Horizontal

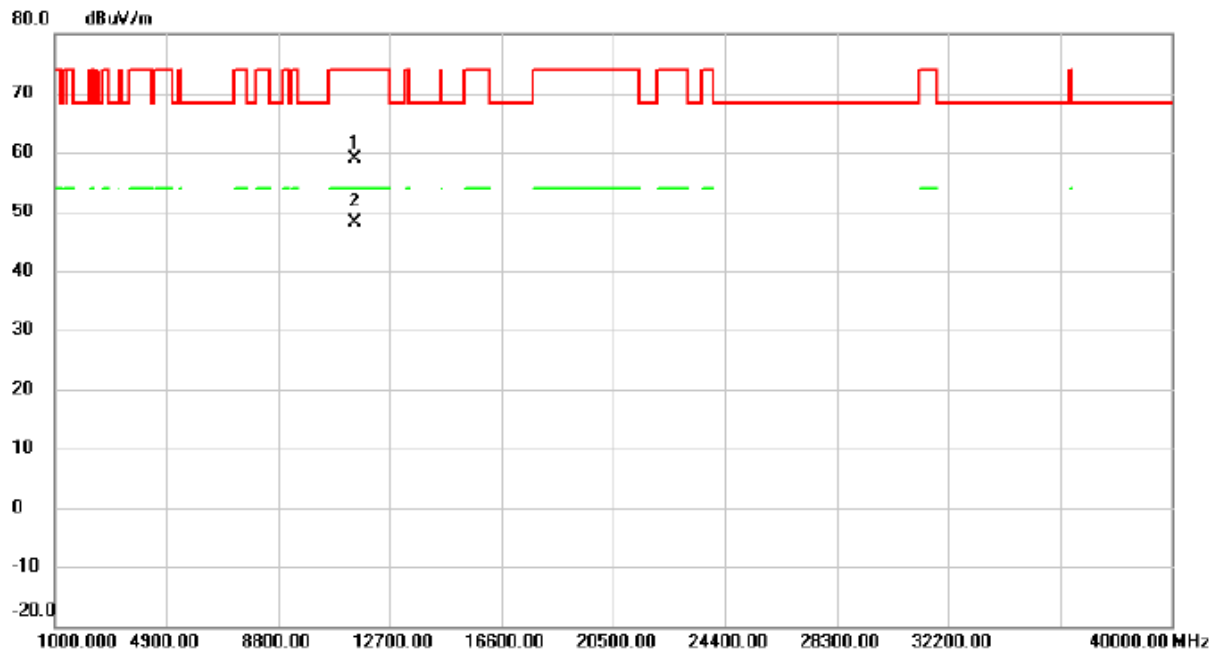


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11455.850	46.87	12.03	58.90	74.00	-15.10	peak	
2	*	11463.550	35.98	12.04	48.02	54.00	-5.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AC (VHT40) Mode 5710 MHz

Vertical

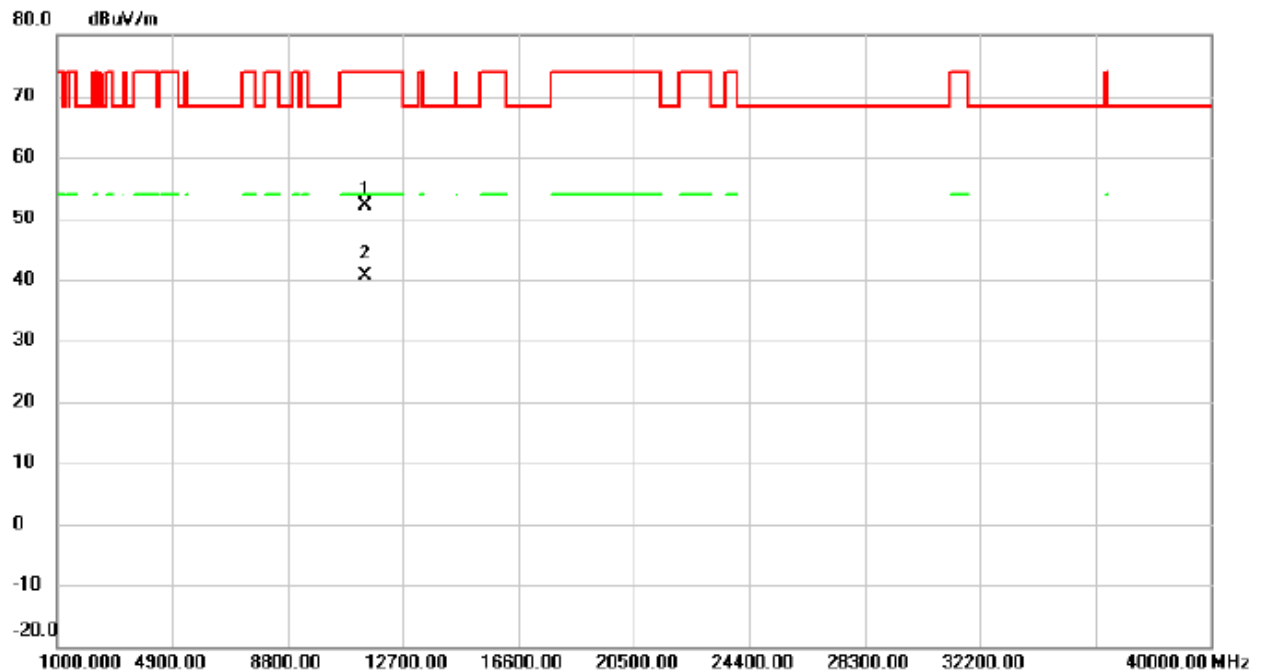


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11402.550	40.25	11.98	52.23	74.00	-21.77	peak	
2	*	11406.800	28.65	11.99	40.64	54.00	-13.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AC (VHT40) Mode 5710 MHz

Horizontal

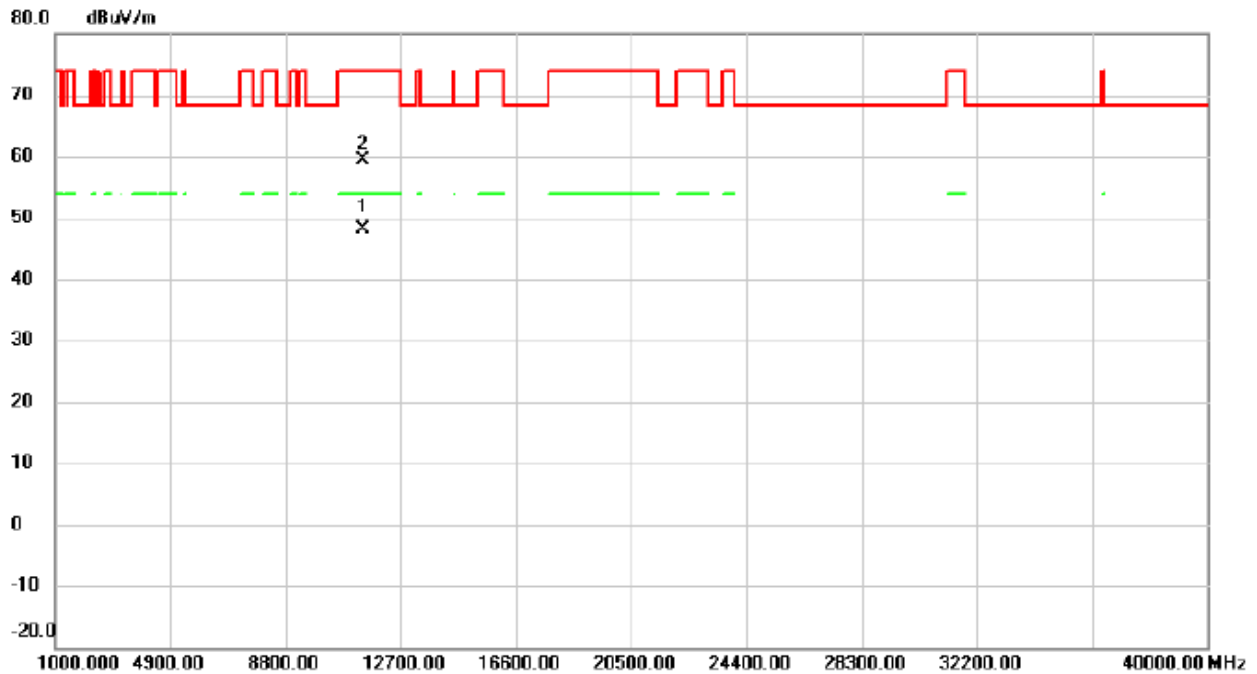


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11403.275	36.21	11.98	48.19	54.00	-5.81	AVG	
2		11431.925	47.39	12.01	59.40	74.00	-14.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AC (VHT80) Mode 5690 MHz

Vertical

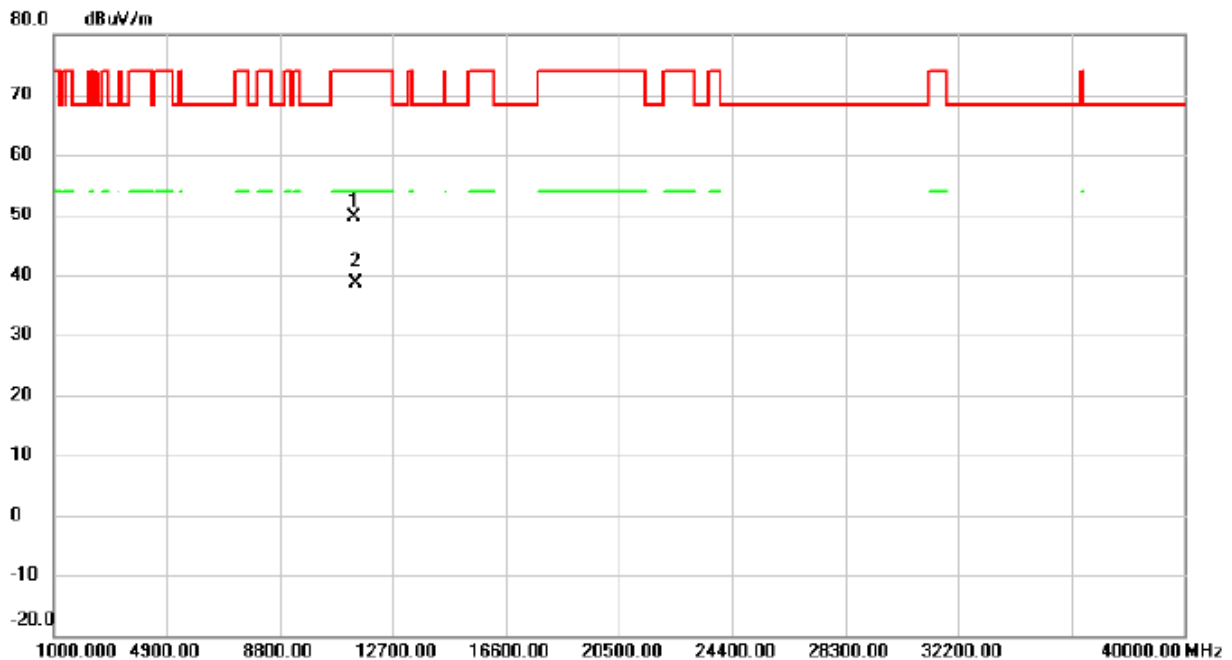

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11397.000	37.68	11.98	49.66	74.00	-24.34	peak	
2	*	11404.375	26.65	11.98	38.63	54.00	-15.37	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX AC (VHT80) Mode 5690 MHz

Horizontal

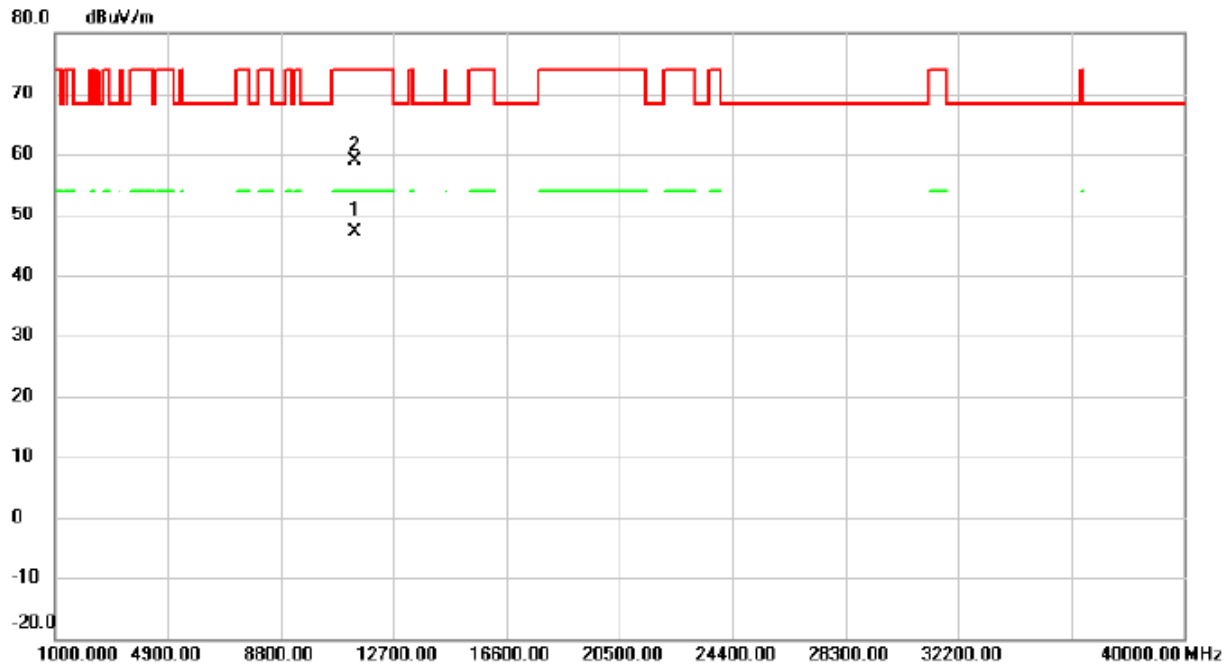

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11378.875	35.12	11.97	47.09	54.00	-6.91	AVG	
2		11395.225	46.84	11.98	58.82	74.00	-15.18	peak	




REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH




Test Mode	UNII-1_TX A Mode
-----------	------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	21.85	17.40
40	5200	29.59	18.40
48	5240	41.49	22.60

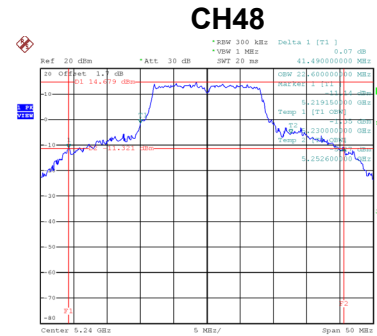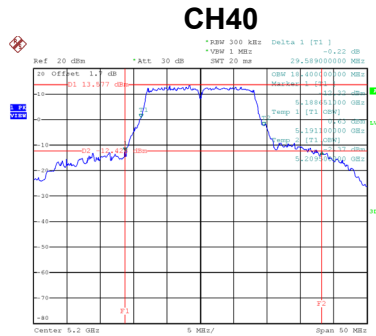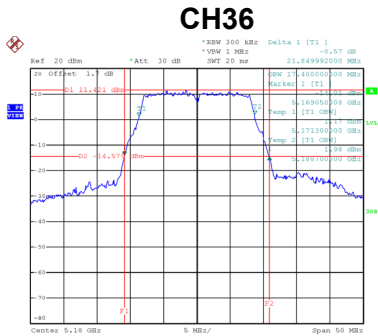

Test Mode	UNII-1_TX N (HT20) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	21.96	18.40
40	5200	22.15	18.30
48	5240	22.30	18.40

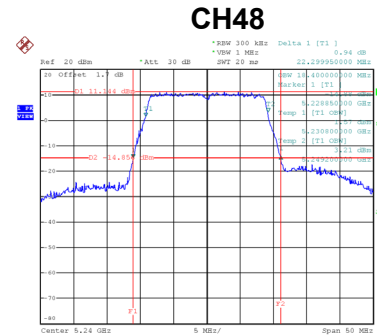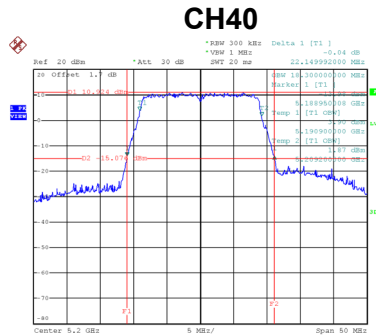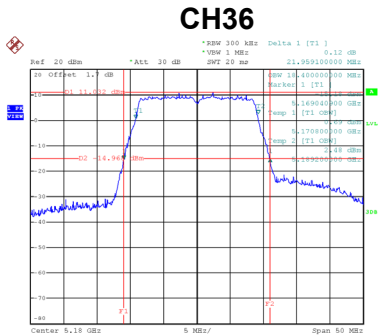

Test Mode	UNII-1_TX N (HT40) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	41.61	37.00
46	5230	57.99	37.40

CH38

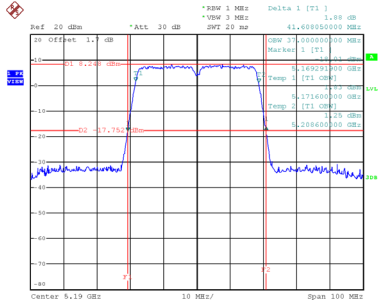

Date: 21.MAY.2019 16:30:20


CH46

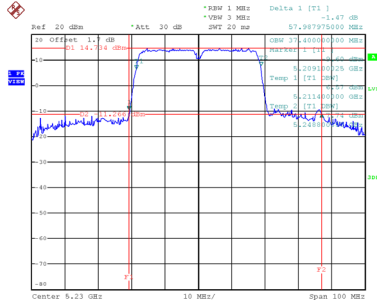


Date: 21.MAY.2019 16:31:59

Test Mode	UNII-2A_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
52	5260	32.09	18.40
60	5300	26.70	17.90
64	5320	21.86	17.40

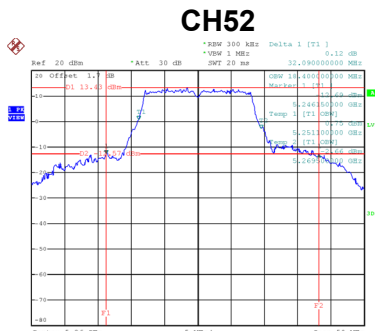

Date: 21.MAY.2019 15:33:16

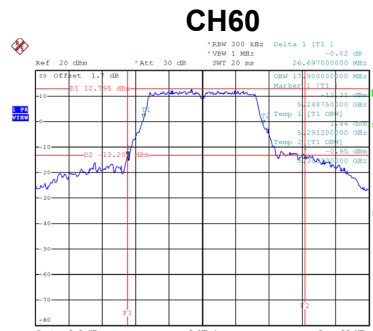


Date: 21.MAY.2019 15:34:46

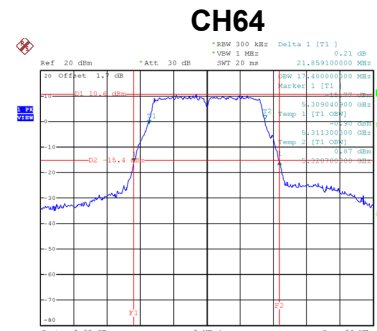


Date: 21.MAY.2019 15:36:21

Test Mode	UNII-2A_TX N (HT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
52	5260	22.25	18.40
60	5300	21.99	18.40
64	5320	22.15	18.40

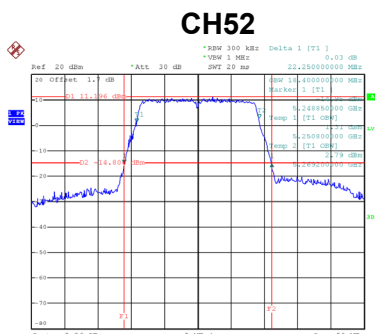

Date: 21.MAY.2019 15:54:01

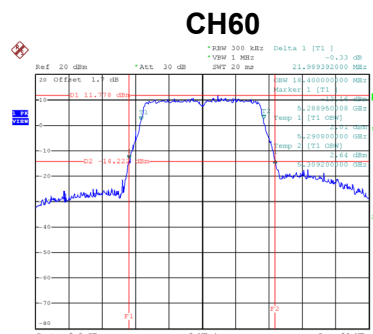

Date: 21.MAY.2019 15:56:03

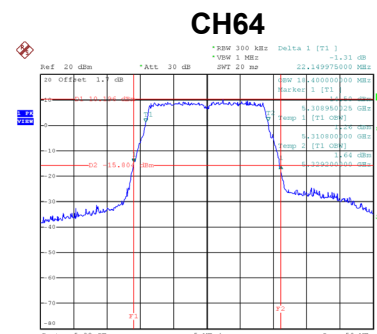


Date: 21.MAY.2019 15:58:38

Test Mode	UNII-2A_TX N (HT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
54	5270	58.19	37.40
62	5310	41.80	36.80

CH54

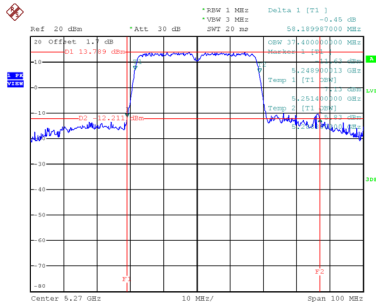

Date: 21.MAY.2019 16:33:04


CH62

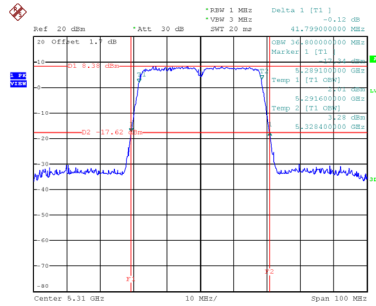


Date: 21.MAY.2019 16:34:16

Test Mode	UNII-2C_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
100	5500	21.90	17.40
116	5580	40.60	21.80
140	5700	21.85	17.40
144	5720	18.84	14.16

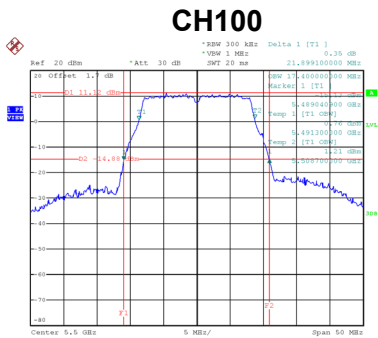


Date: 21.MAY.2019 15:37:59

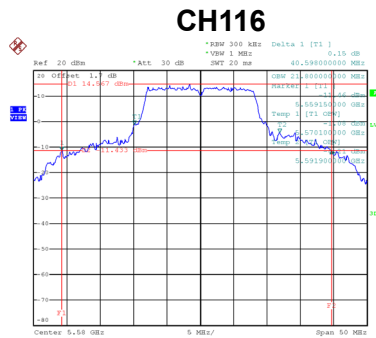

Date: 21.MAY.2019 15:39:23

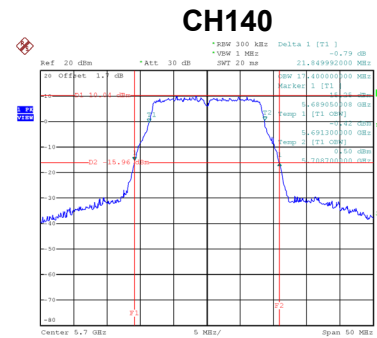


Date: 21.MAY.2019 15:40:59

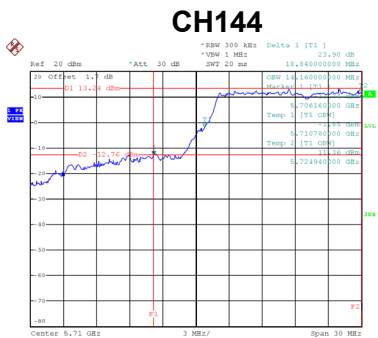


Date: 5.JUN.2019 16:24:38

Test Mode	UNII-2C_TX N (HT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
100	5500	22.00	18.40
116	5580	22.19	18.40
140	5700	22.25	18.30
144	5720	15.96	14.10

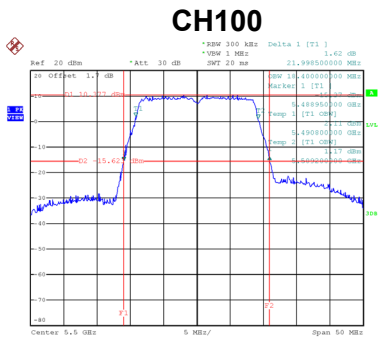


Date: 21.MAY.2019 16:00:15

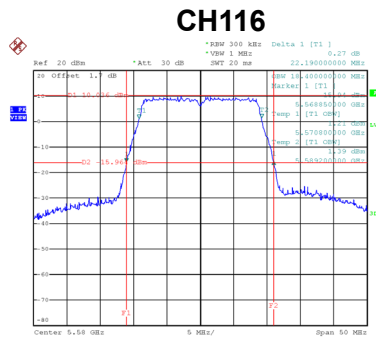

Date: 21.MAY.2019 16:02:02

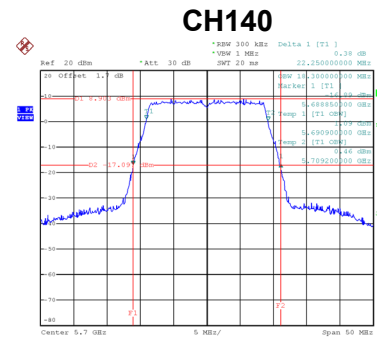


Date: 21.MAY.2019 16:04:00

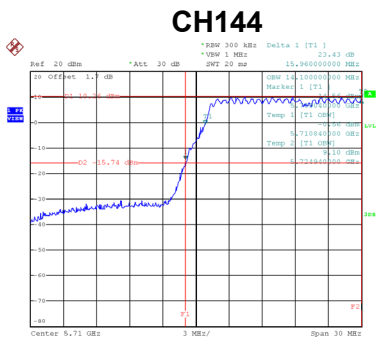


Date: 5.JUN.2019 15:28:46

Test Mode	UNII-2C_TX N (HT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
102	5510	42.10	37.00
110	5550	57.80	37.40
134	5670	41.90	37.00
142	5710	35.84	33.46

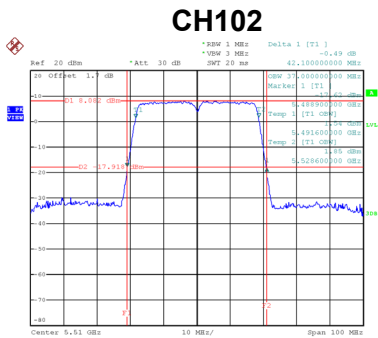


Date: 21.MAY.2019 16:35:30

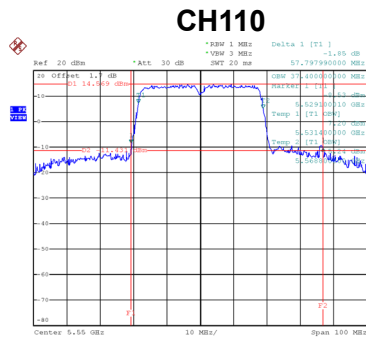

Date: 21.MAY.2019 16:36:39

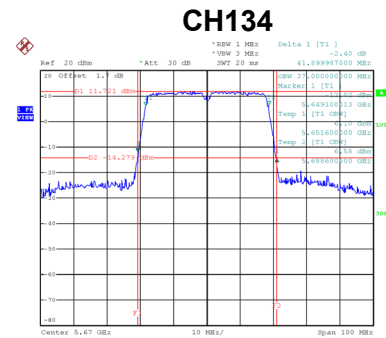

Date: 21.MAY.2019 16:37:49

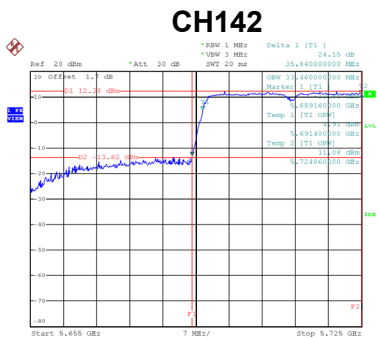

Date: 5.JUN.2019 15:47:59

Test Mode	UNII-3_TX A Mode
-----------	------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
144	5720	3.20	10.32	500	Complies
149	5745	16.35	22.10	500	Complies
157	5785	16.41	22.30	500	Complies
165	5825	16.50	22.00	500	Complies

