

T810 EFTPOS



Installation Guide
Version 1.0



SPECTRA Technologies
ISO9001 : 2008
20002812 QM08




SPECTRA Technologies
ISO14001 : 2004
20002812 UM

Table of Content


1. Layout & Function Descriptions of T810
 - 1.1 Main Unit & Accessories
 - 1.2 Features at a Glance
 - 1.3 Installation of SIM, SAM & Micro-SD Card
 - 1.4 Battery Installation
 - 1.5 Paper Feeding Procedure
2. How to Operate
 - 2.1 Turn On/ Off Procedure
 - 2.2 Swipe Card & Insert Card
3. Rechargeable Battery Safety Guideline
 - 3.1 Prohibition
 - 3.2 Battery Operation & Charging Guideline
 - 3.3 Terminal and Battery Storage Guideline
 - 3.4 Accident Handling
 - 3.5 Battery Disposal
4. Safety & Maintenance
 - 4.1 Basic Safety Practice
 - 4.2 Safety Warning
 - 4.3 Location for Installation
 - 4.4 Maintenance
 - 4.5 Trouble Shooting
5. Other Information

1 Layout & Function Descriptions of T810


1.1 Main Unit & Accessories

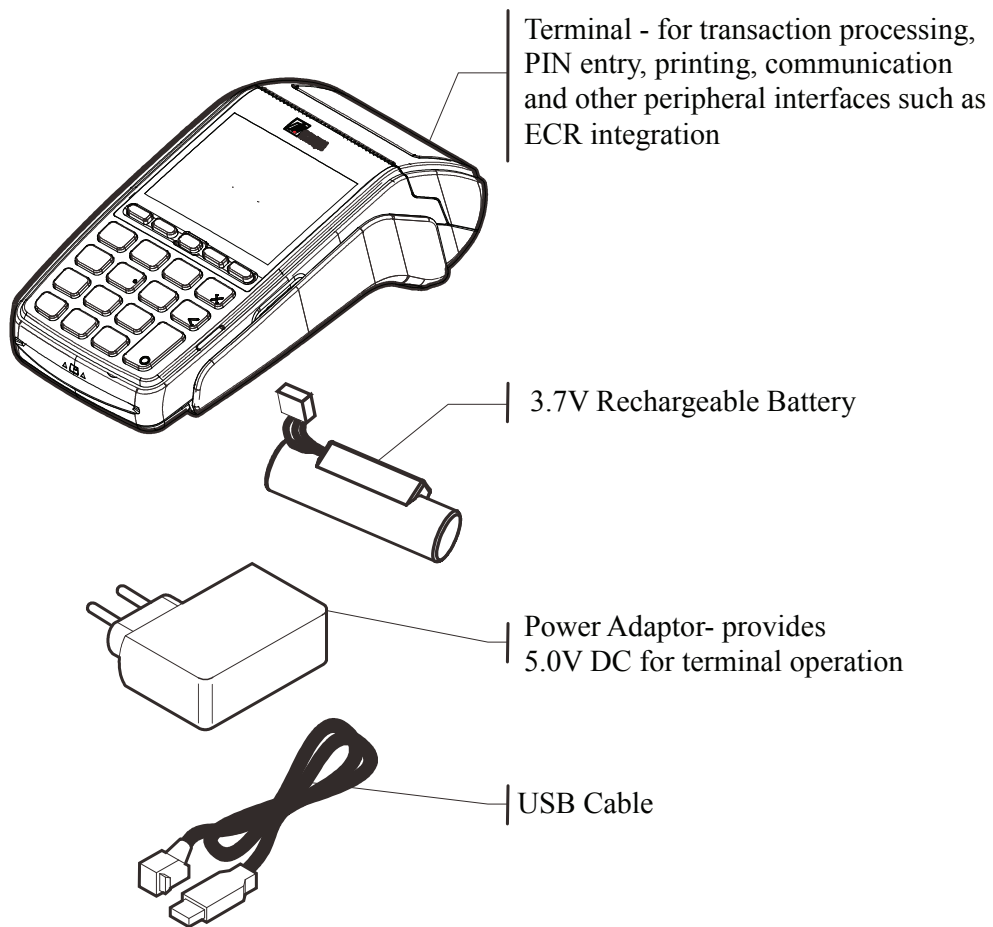


1.2 Features at a Glance

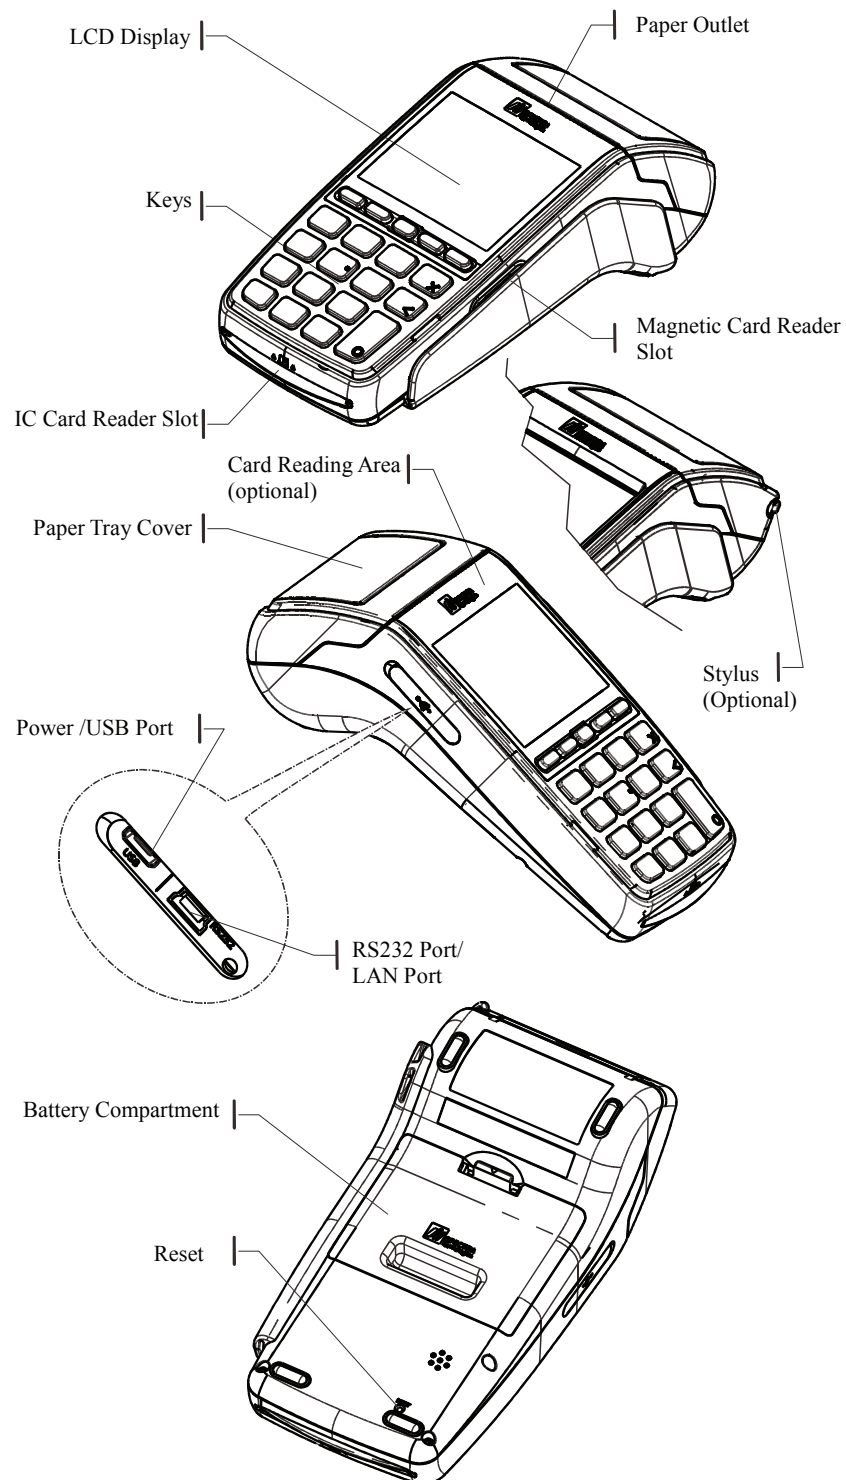

1.3 Installation of SIM, SAM & Micro-SD Card

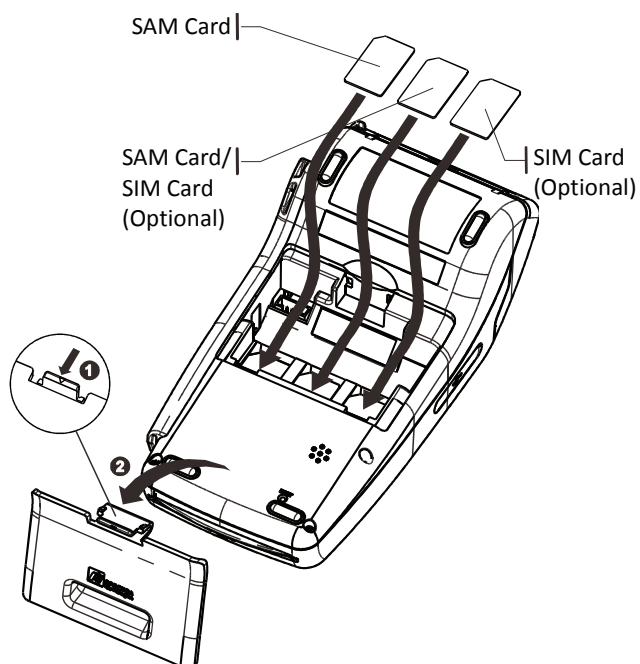


1.4 Battery Installation

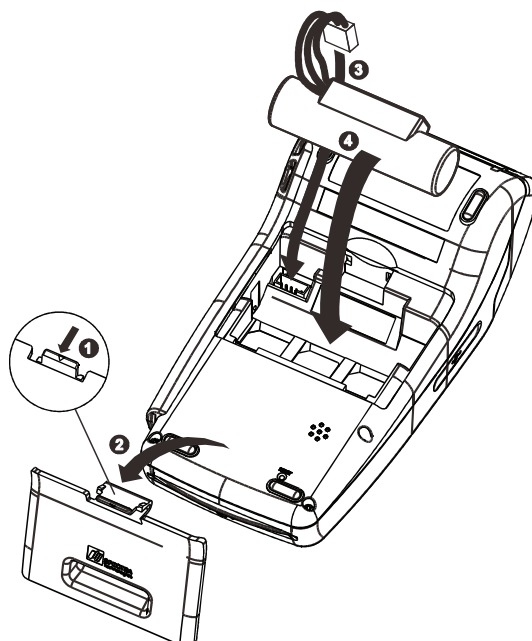


1.5 Paper Feeding Procedure


1. Lift up the Paper Tray Lever

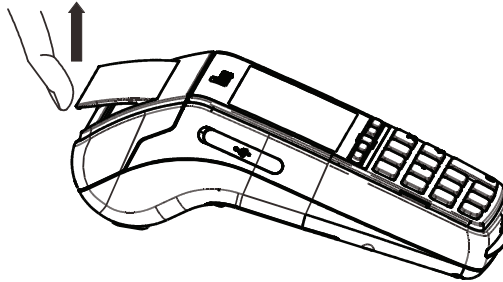


2. Pull the Paper Tray Lever backward

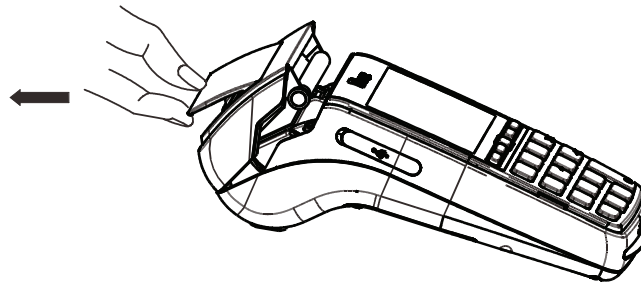


3. Place the paper roll into the tray as shown

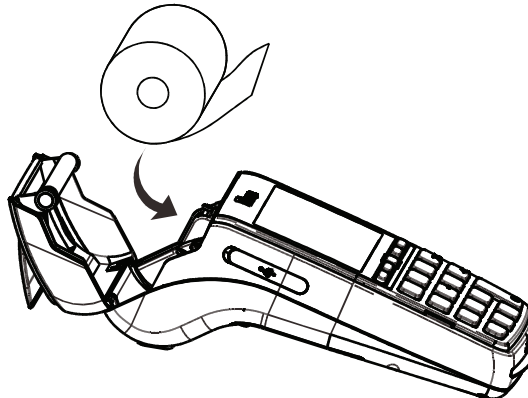

4. Close the Paper Tray Cover

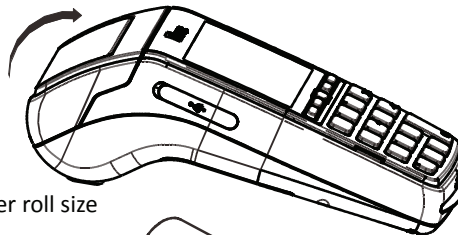

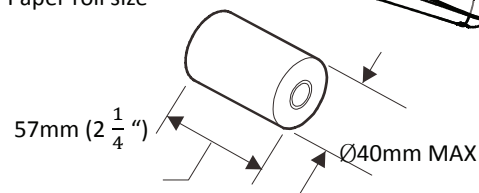

Paper roll size




2 How to Operate

2.1 Turn On/ Off Procedure

- . If the terminal is equipped with charging battery during first time use, please connect the power adaptor and charge the battery for 3 hours.
- . On - Power is on whenever plugged. If the terminal is unplugged, press the  key for several seconds to turn on the terminal. When the terminal displays the application idle screen, it is ready for operation.
- . Off - Disconnect the power adaptor. Keep on pressing the  key for several seconds to turn off the terminal.

2.2 Swipe Card & Insert Card

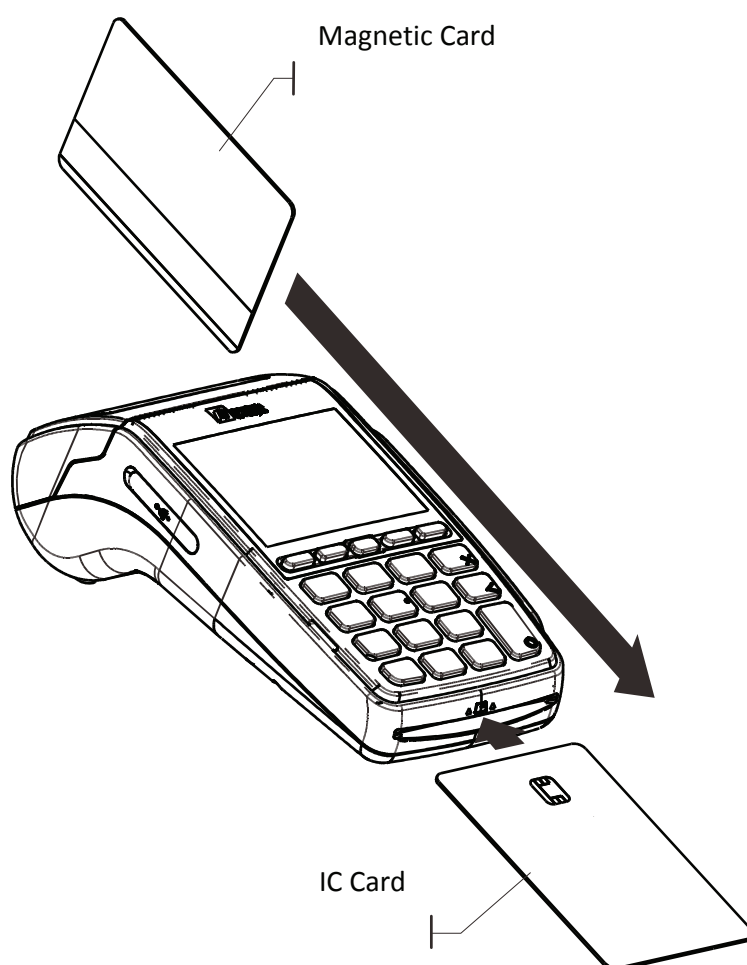

3 Rechargeable Battery Safety Guideline

3.1 Prohibition: Improper handling of the Li-Polymer battery is hazardous, the following forbidden activities must be avoided:

- . DO NOT use NON-SPECTRA provided battery in SPECTRA POS Terminal
- . DO NOT use a charger that is not specifically designed to charge Lithium Polymer Battery
- . DO NOT operate the terminal, charge up or store the battery under high . temperature (under direct sunlight or inside a roasting vehicle) or close to heat source (fire, heater)
- . DO NOT store the battery in the external charger. After charging up, the battery should be removed, even though power is disconnected
- . DO NOT use damaged battery, e.g. Swelled case broken, strange odor and chemical leakage
- . DO NOT knock, crash or press the battery
- . DO NOT submerge the battery into water
- . DO NOT heat the battery or dispose in fire
- . DO NOT solder the battery
- . DO NOT disassemble the battery
- . DO NOT short or puncture the battery

3.2 Battery Operation & Charging Guideline

- . The best temperature for battery operation is 0°C ~ 45°C. DO NOT place the terminal in hot space or poor ventilated space. Ensure good ventilation for cooling
- . DO NOT leave battery un-attended when charging. You should closely monitor the charging process & react to potential problem should they occur
- . Do always check that batteries are physically and electrically undamaged before charge or discharge
- . Battery charging must be kept away from inflammable material and on a non conductive and nonflammable stable surface by:
 - > Terminal built-in charger: install battery to the terminal, then apply power.
 - > SPECTRA supplied external charger
- . When new terminal is received, please charge the battery fully up
- . If the battery gauge indicates battery low, charge up the battery at once
- . Battery always self-discharges. Long period of discharging will deteriorate the capacity and life of the battery. Please re-charge the battery weekly for normal operation