


Appendix A. Test Result of AC Power Line Conducted Emission

| TX_BLE2M_2440MHz_Line | | | | | | | | | | TX_BLE2M_2440MHz_Neutral | | | | | | | | | |
|---|-----------|-------|------------|------------|------------------|--------|---------|---|-----------|--|------------|------------|------------|--------|------------------|--|--|--|--|
| Site :HY-SR01 Condition :Line Mode :TX_BLE2M_2440MHz test by :Neko | | | | | Date: 2025-07-17 | | | | | Site :HY-SR01 Condition :Neutral Mode :TX_BLE2M_2440MHz test by :Neko | | | | | Date: 2025-07-17 | | | | |
| | | | | | | | | | | | | | | | | | | | |
| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark | No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark | | | | |
| | MHz | dBuV | dBuV | dB | dBuV | dB | | | MHz | dBuV | dBuV | dB | dBuV | dB | | | | | |
| 1 | 0.151 | 48.21 | 65.96 | -17.75 | 38.57 | 9.64 | QP | 1 | 0.150 | 47.21 | 65.99 | -18.78 | 37.59 | 9.62 | QP | | | | |
| 2 | 0.151 | 25.94 | 55.96 | -30.02 | 16.30 | 9.64 | Average | 2 | 0.150 | 22.38 | 55.99 | -33.61 | 12.76 | 9.62 | Average | | | | |
| 3 | 0.437 | 31.69 | 57.13 | -25.44 | 22.04 | 9.65 | QP | 3 | 0.439 | 31.54 | 57.07 | -25.53 | 21.91 | 9.63 | QP | | | | |
| 4 | 0.437 | 17.54 | 47.13 | -29.59 | 7.89 | 9.65 | Average | 4 | 0.439 | 19.59 | 47.07 | -27.48 | 9.96 | 9.63 | Average | | | | |
| 5 | 1.226 | 31.65 | 56.00 | -24.35 | 21.94 | 9.71 | QP | 5 | 1.215 | 30.21 | 56.00 | -25.79 | 20.52 | 9.69 | QP | | | | |
| 6 | 1.226 | 17.22 | 46.00 | -28.78 | 7.51 | 9.71 | Average | 6 | 1.215 | 16.78 | 46.00 | -29.22 | 7.09 | 9.69 | Average | | | | |
| 7 | 2.860 | 22.18 | 56.00 | -33.82 | 12.28 | 9.90 | QP | 7 | 2.437 | 22.48 | 56.00 | -33.52 | 12.67 | 9.81 | QP | | | | |
| 8 | 2.860 | 7.55 | 46.00 | -38.45 | -2.35 | 9.90 | Average | 8 | 2.437 | 8.05 | 46.00 | -37.95 | -1.76 | 9.81 | Average | | | | |
| 9 | 6.144 | 21.25 | 60.00 | -38.75 | 11.11 | 10.14 | QP | 9 | 7.008 | 21.95 | 60.00 | -38.05 | 11.80 | 10.15 | QP | | | | |
| 10 | 6.144 | 9.68 | 50.00 | -40.32 | -0.46 | 10.14 | Average | 10 | 7.008 | 7.68 | 50.00 | -42.32 | -2.47 | 10.15 | Average | | | | |
| 11 | 13.435 | 25.46 | 60.00 | -34.54 | 15.56 | 9.90 | QP | 11 | 13.139 | 24.70 | 60.00 | -35.30 | 14.74 | 9.96 | QP | | | | |
| 12 | 13.435 | 6.09 | 50.00 | -43.91 | -3.81 | 9.90 | Average | 12 | 13.139 | 6.19 | 50.00 | -43.81 | -3.77 | 9.96 | Average | | | | |
| Note: 1. Level = Read Level + Factor 2. Factor = LISN insertion loss + Cable loss 3. Over Limit = Level - Limit Line | | | | | | | | Note: 1. Level = Read Level + Factor 2. Factor = LISN insertion loss + Cable loss 3. Over Limit = Level - Limit Line | | | | | | | | | | | |

Appendix B. Test Result of 6 dB Bandwidth

| Modulation | Frequency (MHz) | 6 dB Bandwidth (MHz) | Limit (MHz) | Result |
|--------------|-----------------|----------------------|-------------|--------|
| GFSK (1Mbps) | 2402 | 0.72 | >0.50 | Pass |
| | 2440 | 0.72 | >0.50 | Pass |
| | 2480 | 0.72 | >0.50 | Pass |
| GFSK (2Mbps) | 2402 | 1.11 | >0.50 | Pass |
| | 2440 | 1.11 | >0.50 | Pass |
| | 2480 | 1.11 | >0.50 | Pass |

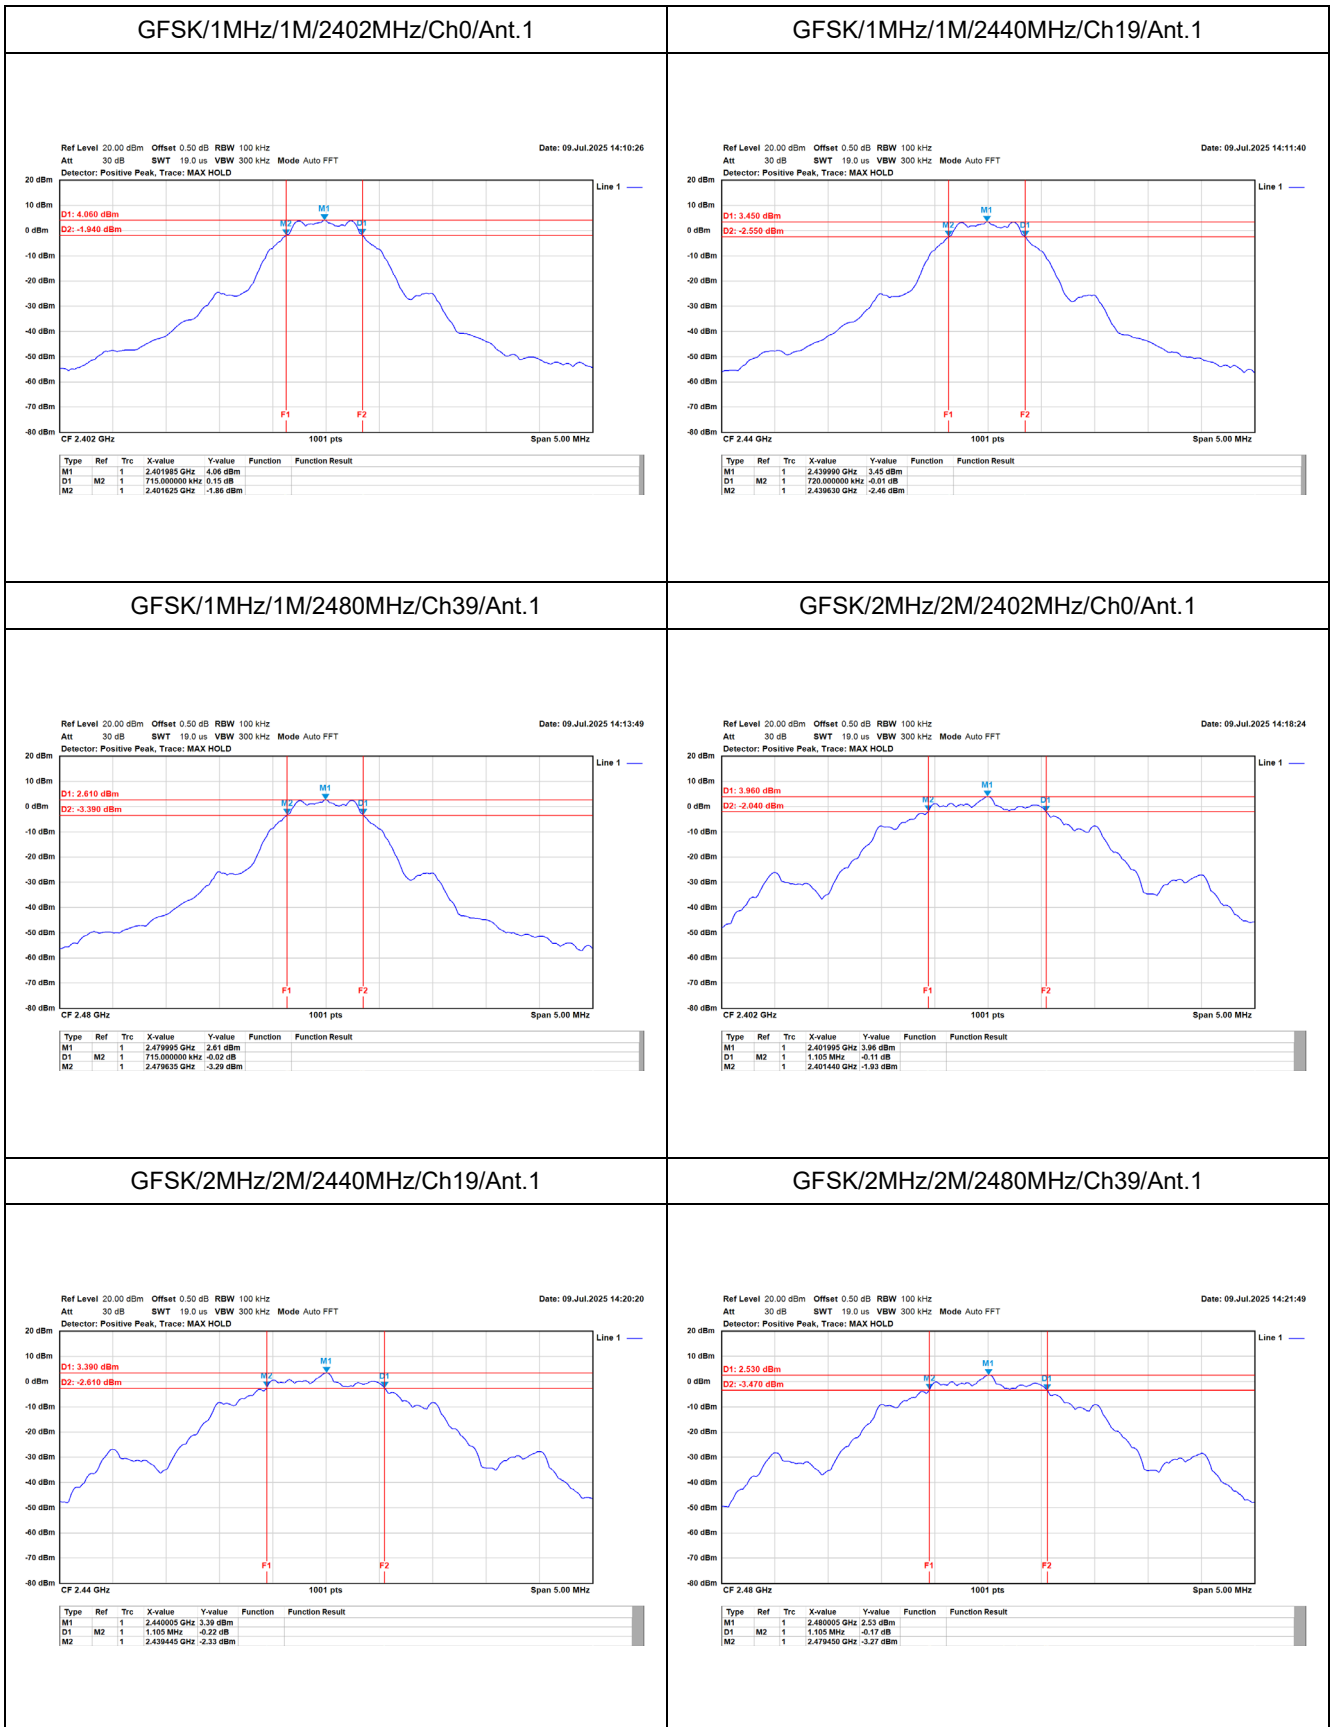


Appendix C. Test Result of Maximum Peak Conducted Output Power

| Modulation | Frequency (MHz) | Maximum Peak Conducted Output Power (dBm) | Limit (dBm) | Result |
|--------------|-----------------|---|-------------|--------|
| GFSK (1Mbps) | 2402 | 5.84 | 30.00 | Pass |
| | 2440 | 5.34 | 30.00 | Pass |
| | 2480 | 4.27 | 30.00 | Pass |
| GFSK (2Mbps) | 2402 | 5.88 | 30.00 | Pass |
| | 2440 | 5.35 | 30.00 | Pass |
| | 2480 | 4.25 | 30.00 | Pass |


Appendix D. Test Result of Power Spectral Density


| Modulation | Frequency (MHz) | Maximum Power Spectral Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
|--------------|-----------------|---|------------------|--------|
| GFSK (1Mbps) | 2402 | -9.76 | 8.00 | Pass |
| | 2440 | -10.41 | 8.00 | Pass |
| | 2480 | -11.29 | 8.00 | Pass |
| GFSK (2Mbps) | 2402 | -12.69 | 8.00 | Pass |
| | 2440 | -13.32 | 8.00 | Pass |
| | 2480 | -14.09 | 8.00 | Pass |

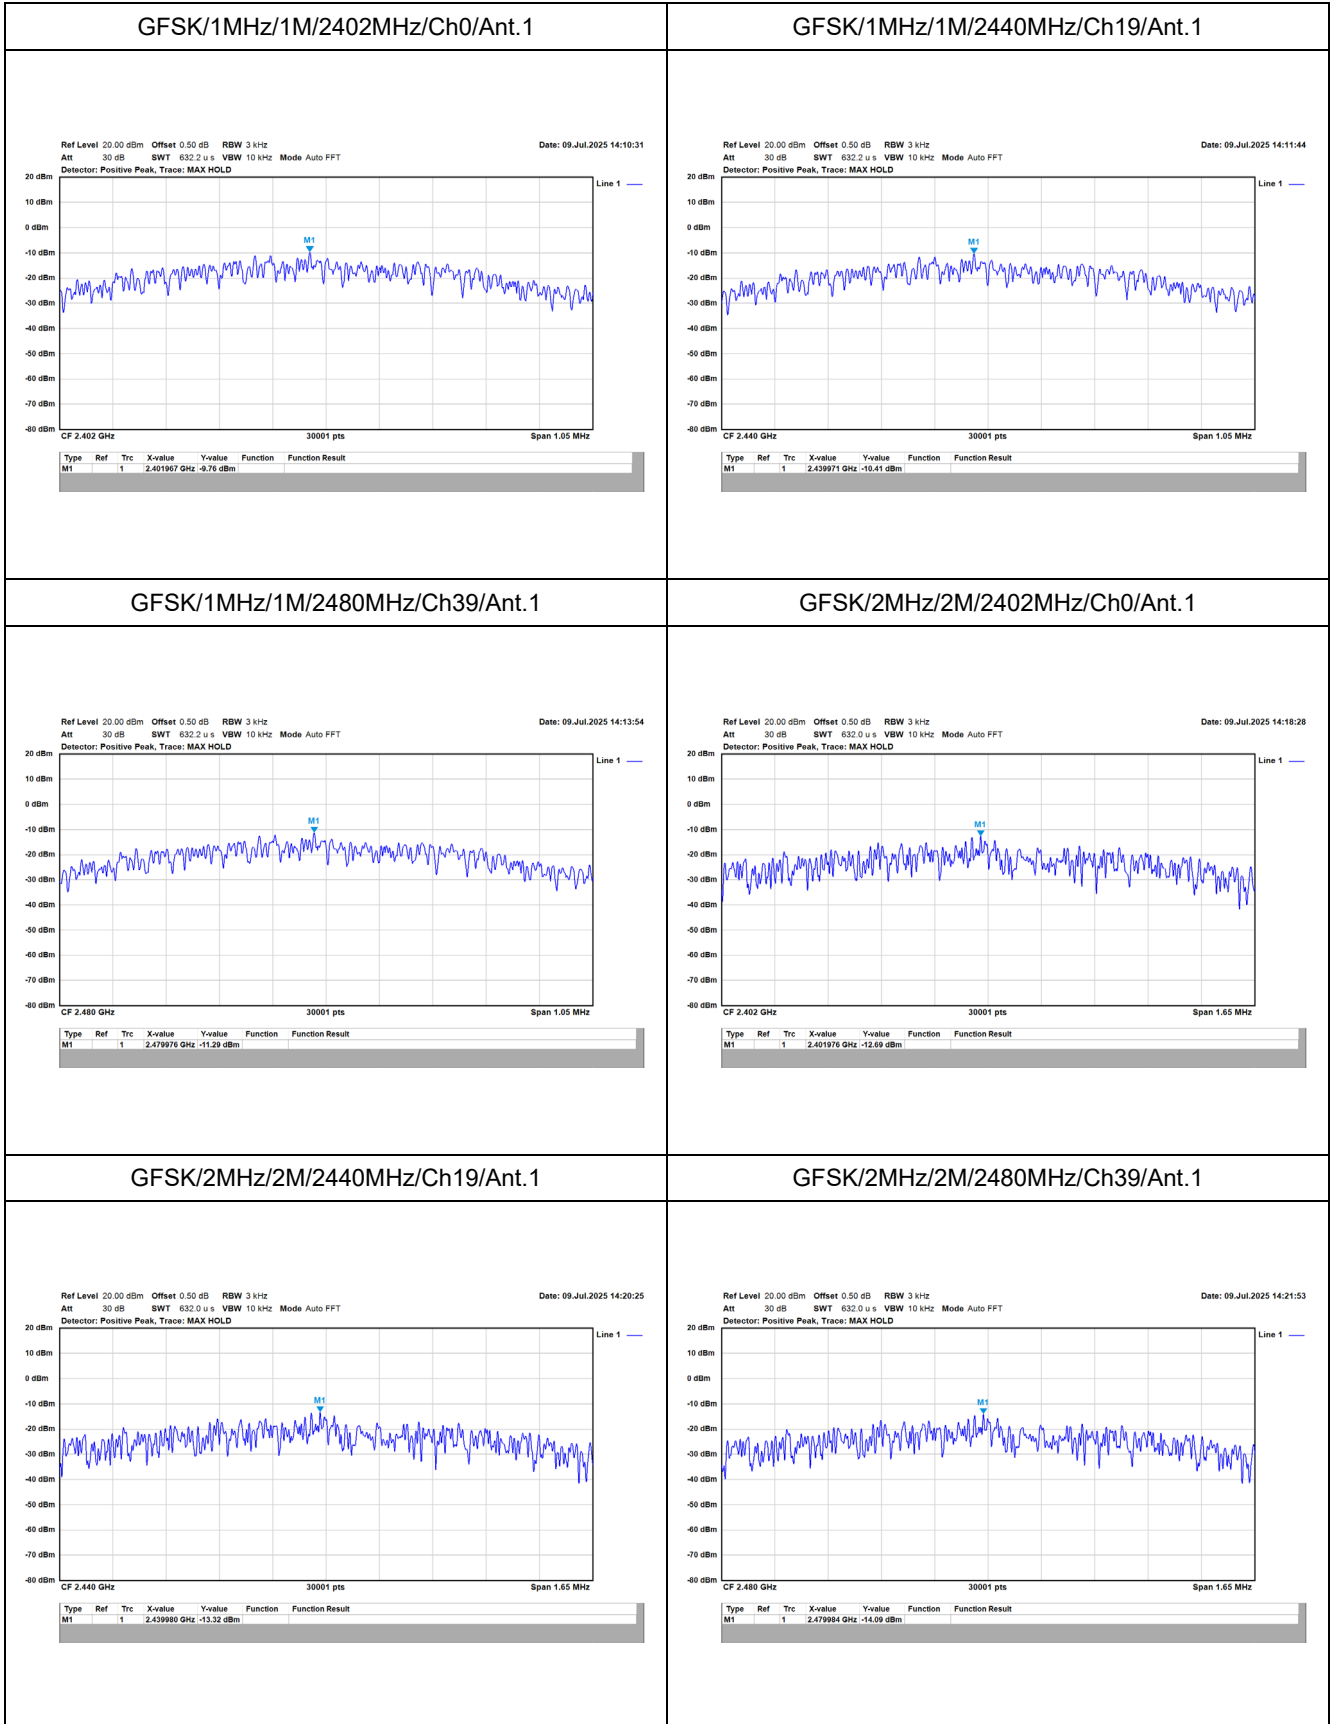


Appendix E. Test Result of Antenna Port Conducted Emission

| Modulation | Measurement Level Δ (dB) | Result |
|---------------|------------------------------------|--------|
| GFSK (1 Mbps) | > 20 | PASS |
| GFSK (2 Mbps) | > 20 | PASS |

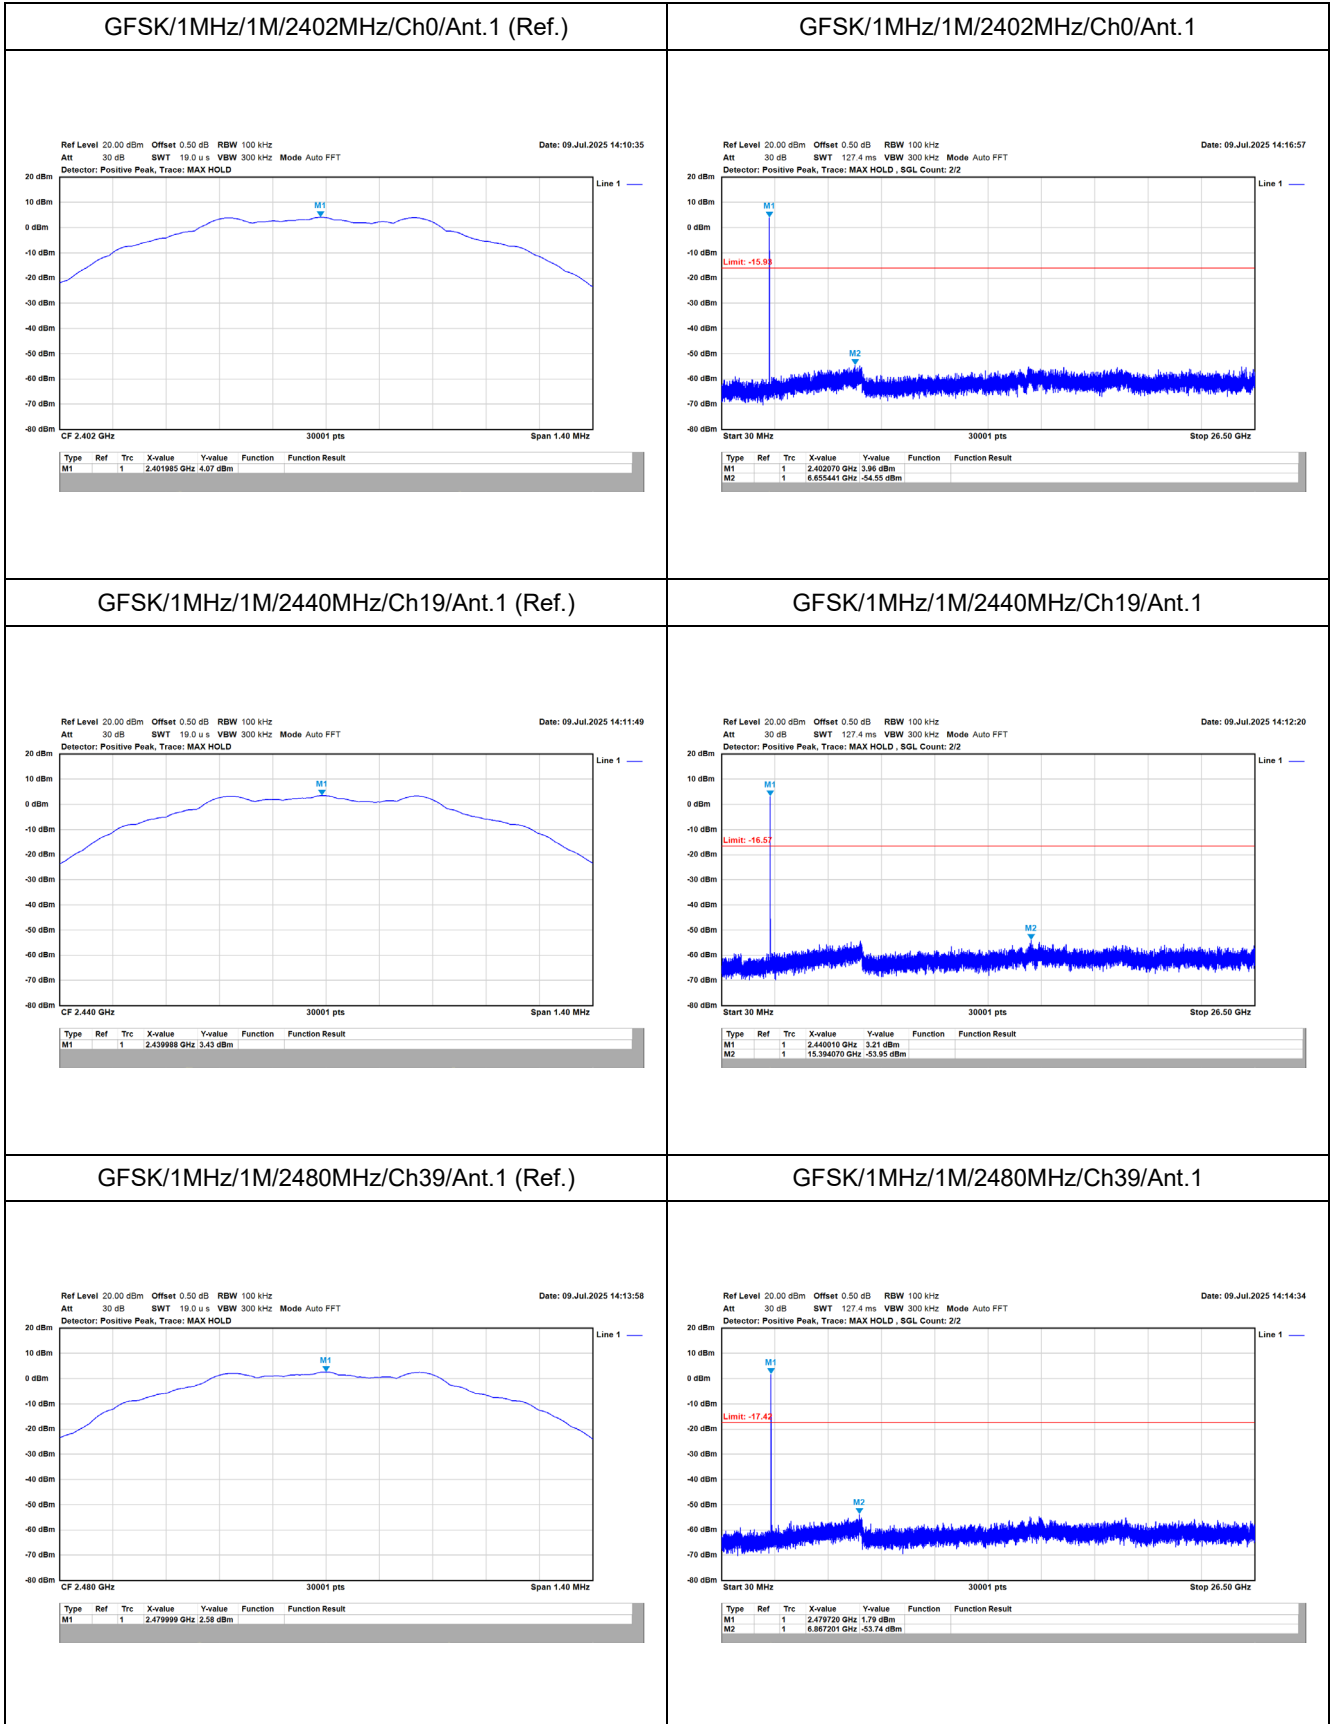

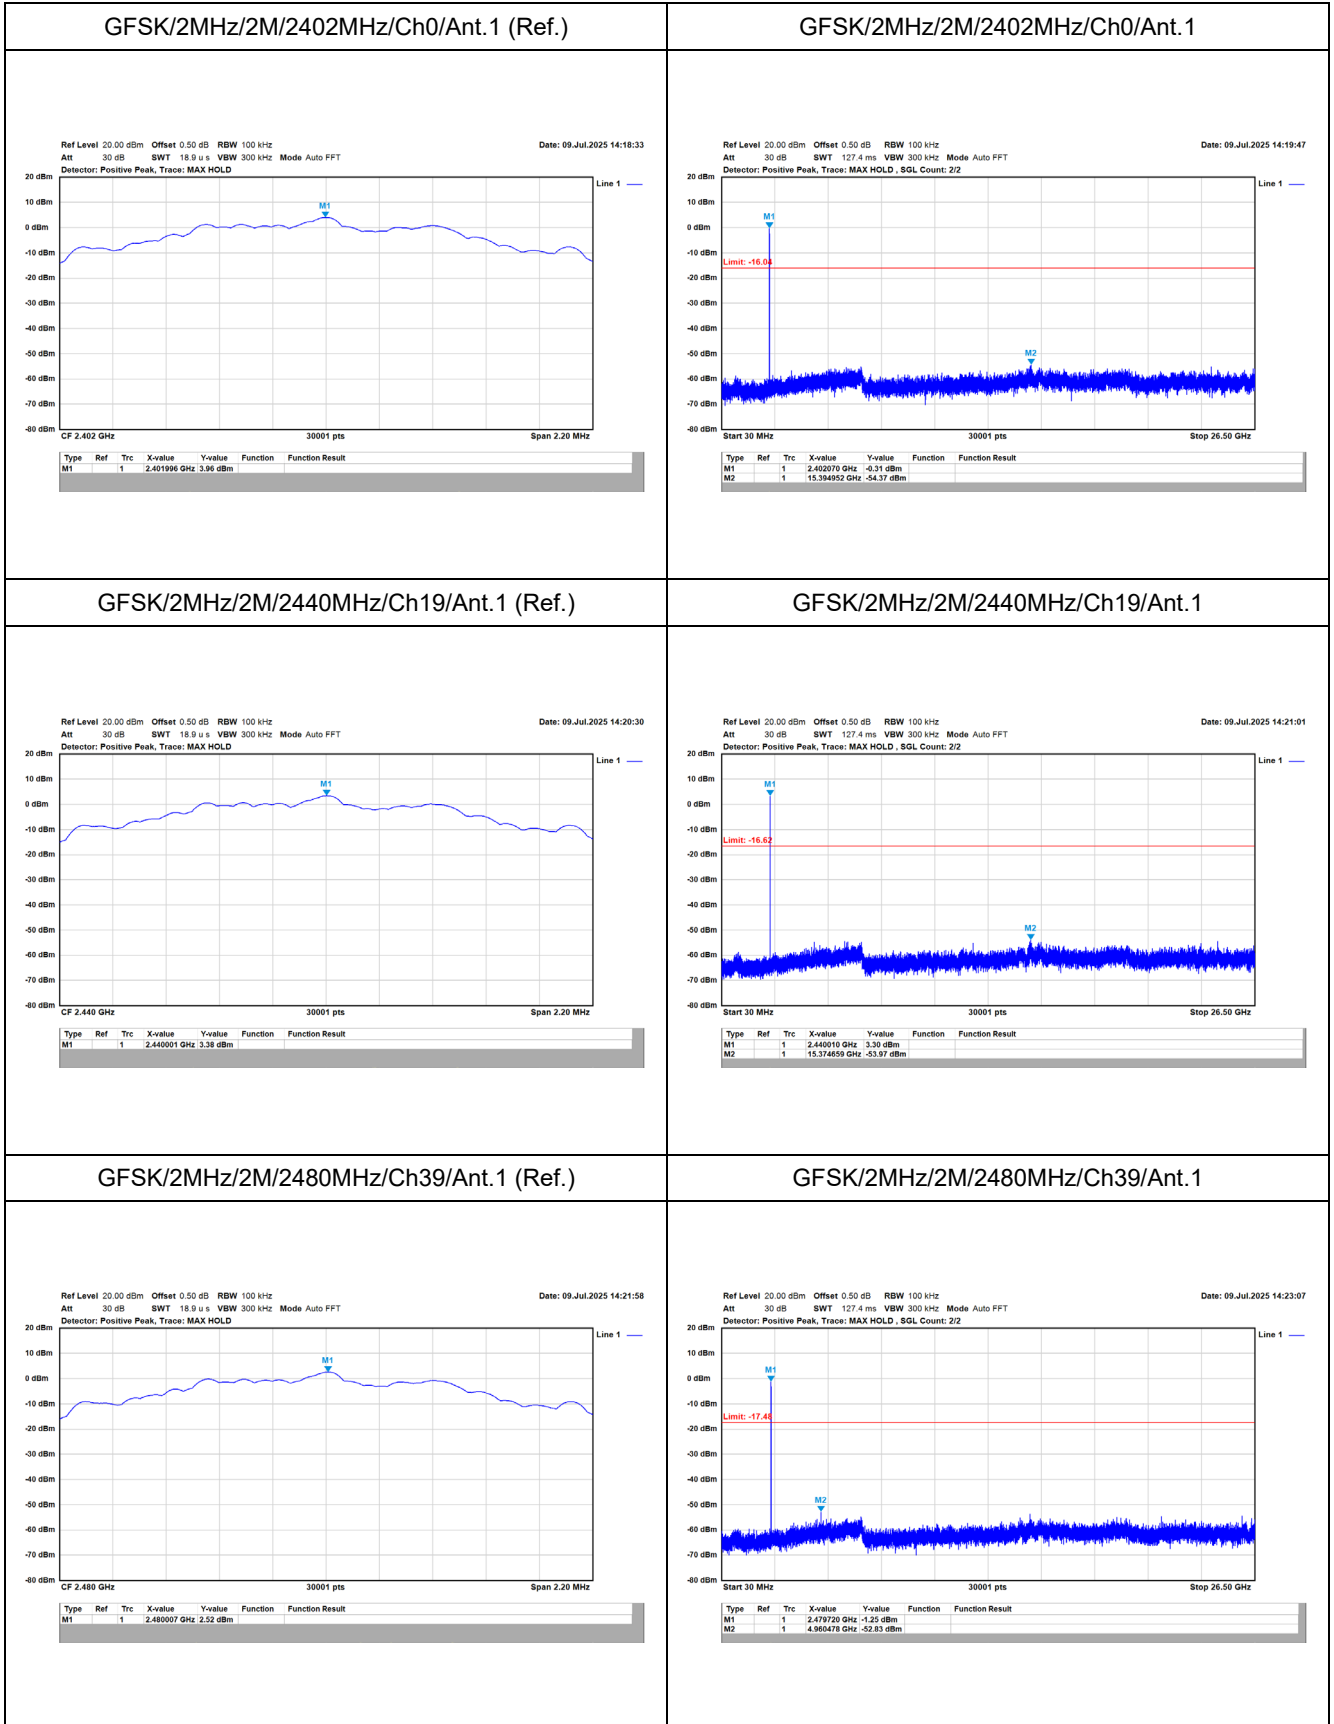

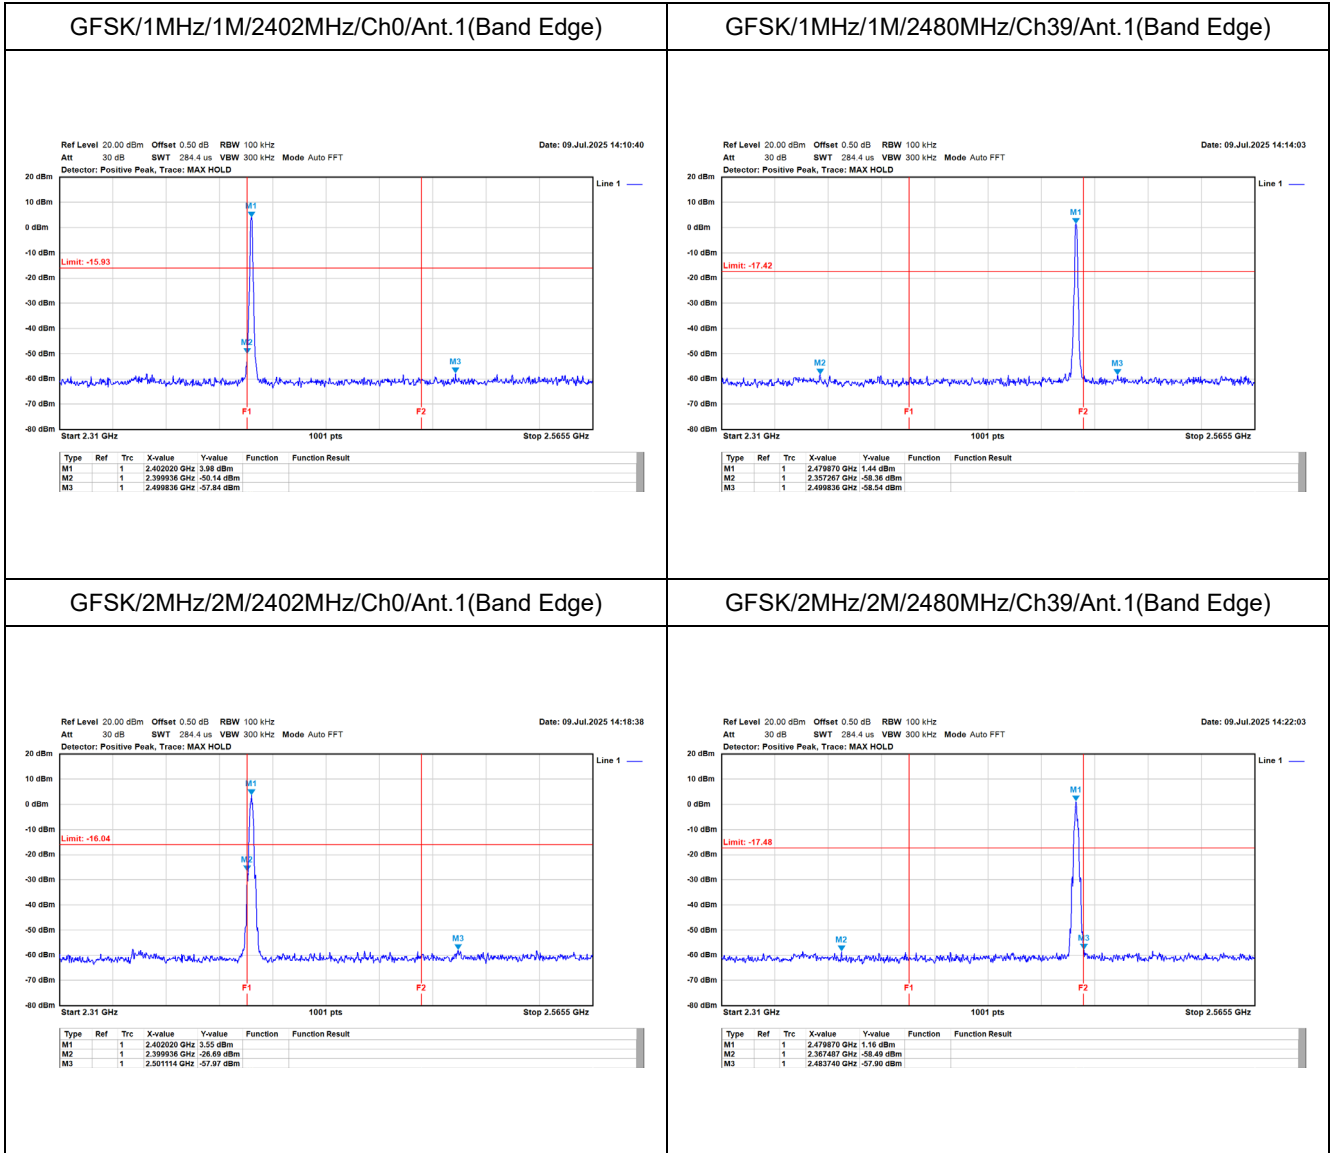


Appendix F. Test Result of Radiated Emission

| TX_BLE1M_2402MHz_H | | TX_BLE1M_2402MHz_V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|-----------|--|------------|------------|------------|------------|------------|--------|--------|--|-----|--------|--------|----|------|------|--|---|----------|-------|-------|--------|-------|--------|------|--|--|-----|-----------|-------|------------|------------|------------|--------|--------|--|-----|--------|--------|----|------|------|--|---|----------|-------|-------|--------|-------|--------|------|
| <p>Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_BLE1M_2402MHz Test BY :Bob</p> <p>Date: 2025-07-11</p> | | <p>Site :HY-CB03 Condition :3m ,Vertical Mode :TX_BLE1M_2402MHz Test BY :Bob</p> <p>Date: 2025-07-11</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit Line</th> <th>Over Limit</th> <th>Read Level</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.000</td> <td>36.07</td> <td>74.00</td> <td>-37.93</td> <td>51.02</td> <td>-14.95</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p> | | No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | | 1 | 4804.000 | 36.07 | 74.00 | -37.93 | 51.02 | -14.95 | Peak | <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit Line</th> <th>Over Limit</th> <th>Read Level</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.000</td> <td>36.31</td> <td>74.00</td> <td>-37.69</td> <td>51.26</td> <td>-14.95</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p> | | No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | | 1 | 4804.000 | 36.31 | 74.00 | -37.69 | 51.26 | -14.95 | Peak |
| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4804.000 | 36.07 | 74.00 | -37.93 | 51.02 | -14.95 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4804.000 | 36.31 | 74.00 | -37.69 | 51.26 | -14.95 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TX_BLE1M_2440MHz_H | | TX_BLE1M_2440MHz_V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_BLE1M_2440MHz Test BY :Bob</p> <p>Date: 2025-07-11</p> | | <p>Site :HY-CB03 Condition :3m ,Vertical Mode :TX_BLE1M_2440MHz Test BY :Bob</p> <p>Date: 2025-07-11</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit Line</th> <th>Over Limit</th> <th>Read Level</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.000</td> <td>36.51</td> <td>74.00</td> <td>-37.49</td> <td>51.10</td> <td>-14.59</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p> | | No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | | 1 | 4880.000 | 36.51 | 74.00 | -37.49 | 51.10 | -14.59 | Peak | <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit Line</th> <th>Over Limit</th> <th>Read Level</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.000</td> <td>36.59</td> <td>74.00</td> <td>-37.41</td> <td>51.18</td> <td>-14.59</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p> | | No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | | 1 | 4880.000 | 36.59 | 74.00 | -37.41 | 51.18 | -14.59 | Peak |
| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4880.000 | 36.51 | 74.00 | -37.49 | 51.10 | -14.59 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4880.000 | 36.59 | 74.00 | -37.41 | 51.18 | -14.59 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

TX_BLE1M_2480MHz_H

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BLE1M_2480MHz
 Test BY :Bob

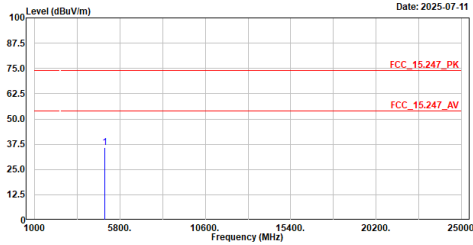


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 4960.000 | 35.88 | 74.00 | -38.12 | 50.10 | -14.22 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BLE1M_2480MHz
 Test BY :Bob

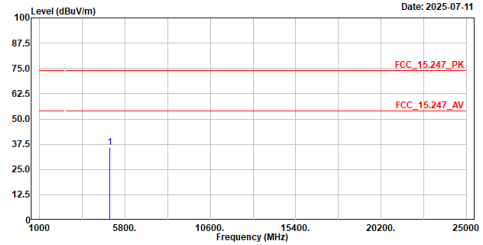


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 4960.000 | 35.78 | 74.00 | -38.22 | 50.00 | -14.22 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BLE2M_2402MHz
 Test BY :Bob

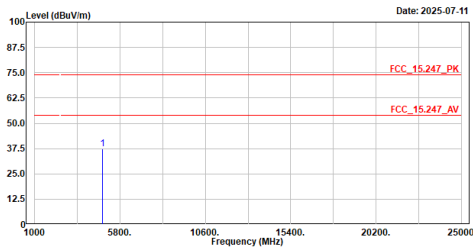


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 4884.000 | 37.24 | 74.00 | -36.76 | 52.19 | -14.95 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BLE2M_2402MHz
 Test BY :Bob

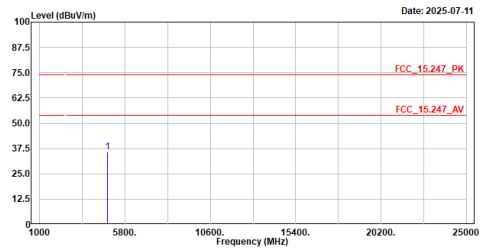


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 4884.000 | 35.91 | 74.00 | -38.09 | 50.86 | -14.95 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BLE2M_2440MHz
 Test BY :Bob

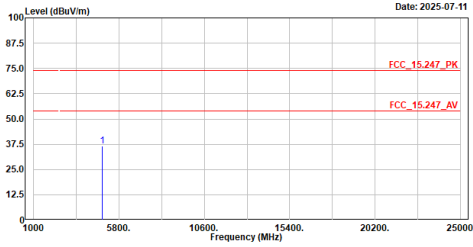


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 4880.000 | 36.59 | 74.00 | -37.41 | 51.18 | -14.59 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_V

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BLE2M_2440MHz
 Test BY :Bob

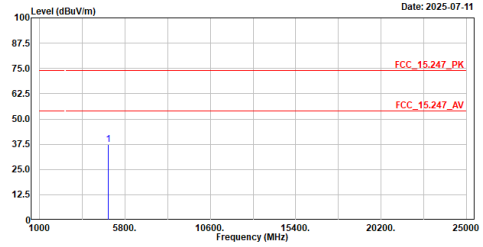


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 4880.000 | 37.33 | 74.00 | -36.67 | 51.92 | -14.59 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BLE2M_2480MHz
 Test BY :Bob

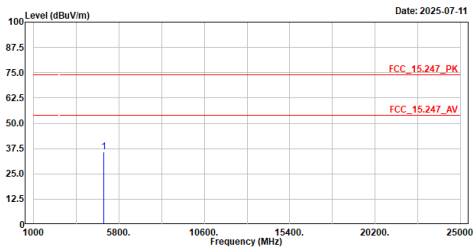


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 4960.000 | 35.80 | 74.00 | -38.20 | 50.02 | -14.22 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.





TX_BLE2M_2480MHz_V

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BLE2M_2480MHz
 Test BY :Bob

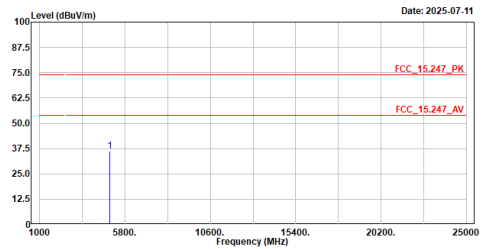


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 4960.000 | 36.25 | 74.00 | -37.75 | 50.47 | -14.22 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

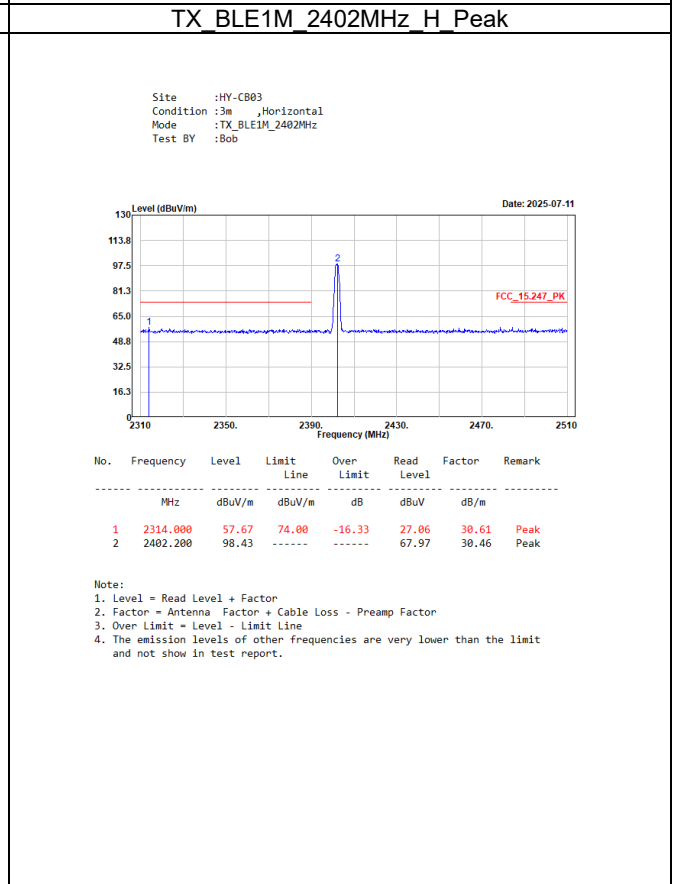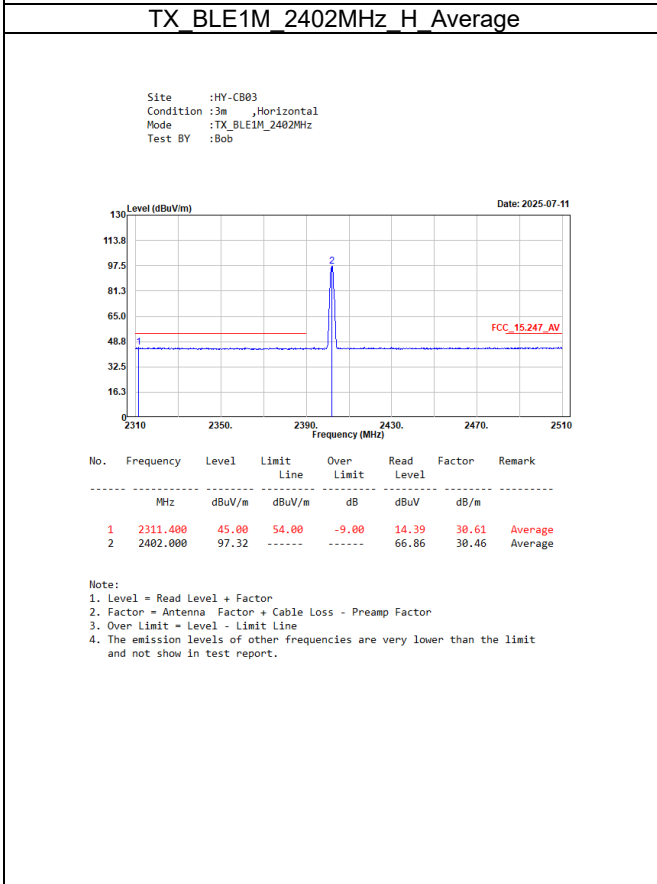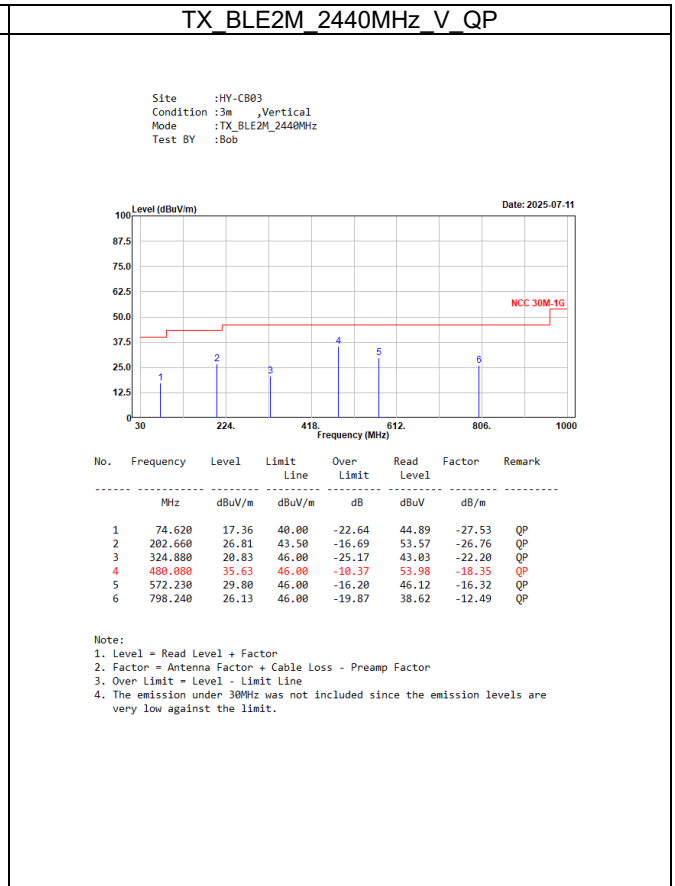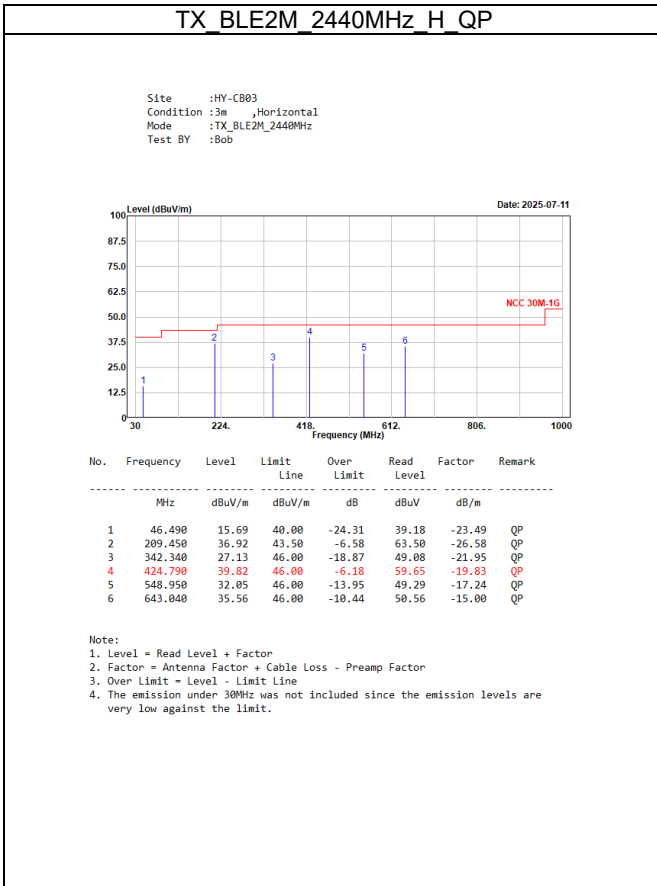

TX_BLE1M_2402MHz_V Average

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BLE1M_2402MHz
 Test BY :Bob

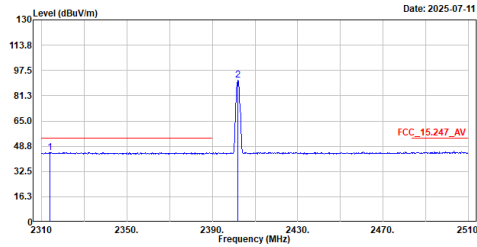


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 2314.000 | 44.85 | 54.00 | -9.15 | 14.24 | 30.61 | Average |
| 2 | 2402.000 | 91.07 | ----- | ----- | 60.61 | 30.46 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V Peak

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BLE1M_2402MHz
 Test BY :Bob

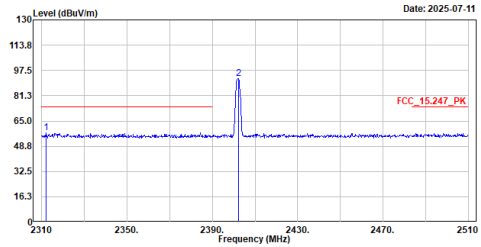


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 2312.000 | 57.60 | 74.00 | -16.40 | 26.99 | 30.61 | Peak |
| 2 | 2402.200 | 92.19 | ----- | ----- | 61.73 | 30.46 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H Average

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BLE1M_2480MHz
 Test BY :Bob

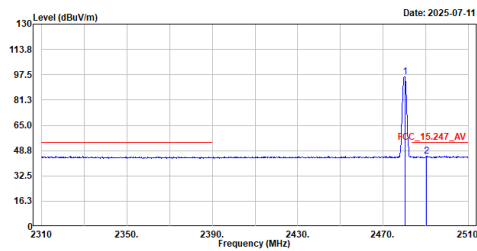


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 2480.200 | 96.11 | ----- | ----- | 65.72 | 30.39 | Average |
| 2 | 2490.400 | 45.10 | 54.00 | -8.90 | 14.60 | 30.50 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H Peak

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BLE1M_2480MHz
 Test BY :Bob

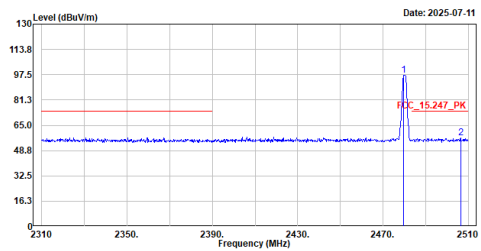


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 2479.800 | 97.24 | ----- | ----- | 66.85 | 30.39 | Peak |
| 2 | 2506.400 | 56.71 | 74.00 | -17.29 | 26.20 | 30.51 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V Average

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BLE1M_2480MHz
 Test BY :Bob

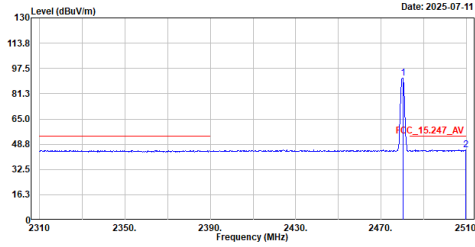


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 2480.200 | 91.40 | 48.80 | -8.83 | 61.01 | 30.39 | Average |
| 2 | 2509.800 | 45.17 | 48.80 | -8.83 | 14.65 | 30.52 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V Peak

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BLE1M_2480MHz
 Test BY :Bob

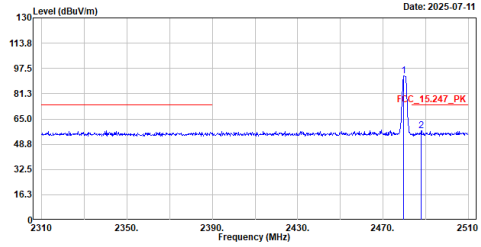


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 2479.800 | 92.53 | 48.80 | -16.68 | 62.14 | 30.39 | Peak |
| 2 | 2488.000 | 57.32 | 48.80 | -16.68 | 26.84 | 30.48 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H Average

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BLE2M_2402MHz
 Test BY :Bob

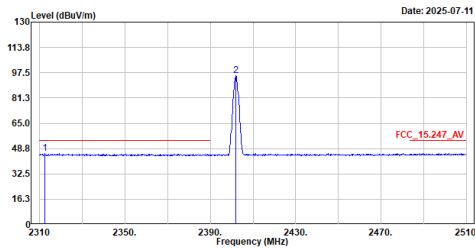


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|-------|-------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 2312.600 | 45.51 | 48.80 | -8.49 | 14.90 | 30.61 | Average |
| 2 | 2402.000 | 95.44 | 48.80 | -8.49 | 64.98 | 30.46 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H Peak

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BLE2M_2402MHz
 Test BY :Bob

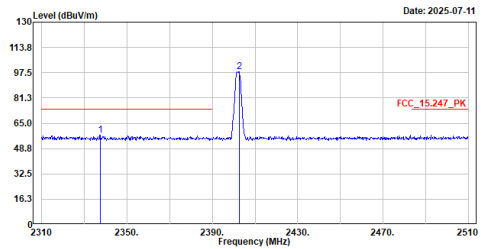


| No. | Frequency | Level | Limit | Over | Read | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 2337.400 | 57.39 | 48.80 | -16.61 | 26.95 | 30.44 | Peak |
| 2 | 2402.600 | 98.03 | 48.80 | -16.61 | 67.55 | 30.48 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V Average

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BLE2M_2402MHz
 Test BY :Bob

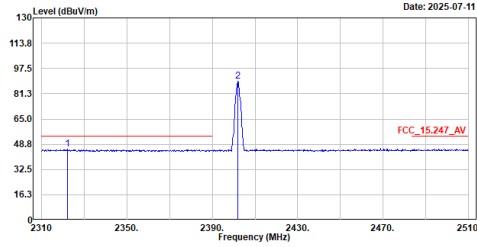


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 2322.000 | 45.65 | 54.00 | -8.35 | 15.06 | 30.59 | Average |
| 2 | 2402.000 | 89.09 | ----- | ----- | 58.63 | 30.46 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V Peak

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BLE2M_2402MHz
 Test BY :Bob

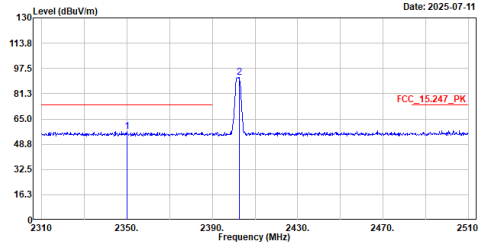


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 2350.000 | 56.87 | 74.00 | -17.13 | 26.45 | 30.42 | Peak |
| 2 | 2402.600 | 91.69 | ----- | ----- | 61.21 | 30.48 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H Average

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BLE2M_2480MHz
 Test BY :Bob

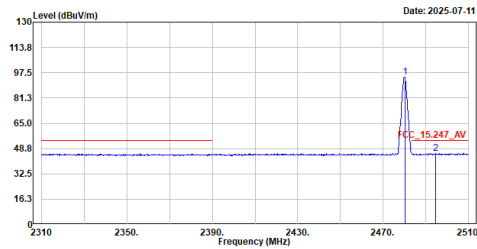


| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|---------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 2480.200 | 94.75 | ----- | ----- | 64.36 | 30.39 | Average |
| 2 | 2494.800 | 45.44 | 54.00 | -8.56 | 14.93 | 30.51 | Average |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H Peak

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BLE2M_2480MHz
 Test BY :Bob

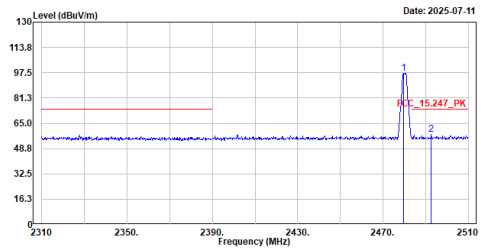

| No. | Frequency | Level | Limit Line | Over Limit | Read Level | Factor | Remark |
|-----|-----------|--------|------------|------------|------------|--------|--------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | |
| 1 | 2479.600 | 97.36 | ----- | ----- | 66.97 | 30.39 | Peak |
| 2 | 2492.600 | 57.95 | 74.00 | -16.05 | 27.45 | 30.50 | Peak |

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

