





# OPERATING INSTRUCTIONS RV LEVEL - CIPA PART #03000

## RV LEVEL BASE

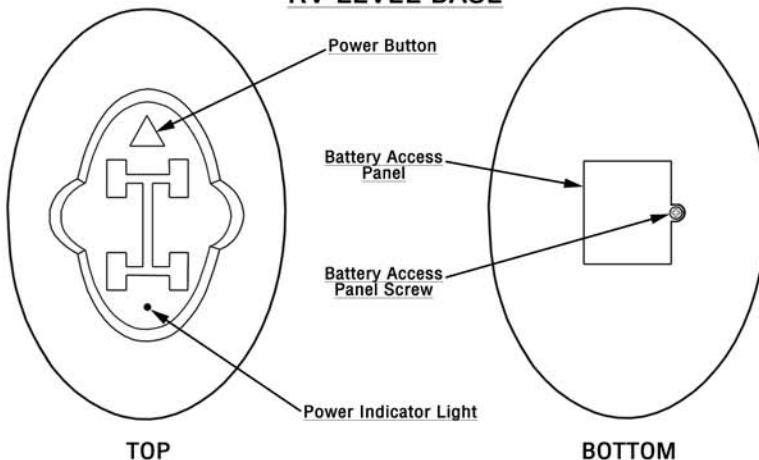

## RV LEVEL HAND-HELD MODULE

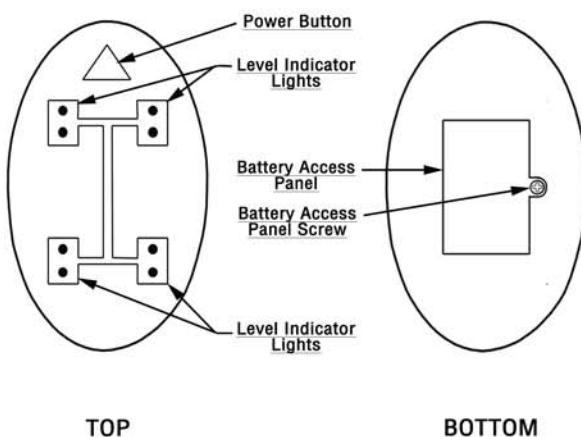

## BEFORE USING YOUR RV LEVEL

- 1) Using a Phillips head screwdriver, loosen the Battery Access Panel Screws and remove the Battery Access Panel on both the RV Level Base and Hand-Held Module.
- 2) Install One (1) 9-volt battery into the base, and Two (2) AAA batteries into the Hand-Held Module.
- 3) Replace the Battery Access Panels.
- 4) The RV Level is now ready to use.

## USING YOUR RV LEVEL

- 1) Turn RV Level Base and Hand-Held Module on by pressing green triangle power buttons located on the face of each unit. The power indicator light on the RV Level Base and all level indicator lights on the Hand-Held Module will be illuminated at this time.
- 2) Position the RV Level Base on the floor as close as possible to the center of the RV being leveled, with green triangle power switch pointed towards the front of the vehicle. The green triangle power switch signifies the front of RV on both the RV Level Base, and the Hand-Held Module.  
(NOTE: Place the RV Level Base on a flat, solid surface such as tile flooring, if possible.)
- 3) Hand-Held Module will display red or green lights at this time. Green lights indicate which corners of the RV are level, and Red Lights indicate which corners of the RV that need to be raised.
- 4) Use the RV's leveling system to adjust the height of the RV's corners until all indicator lights display green.
- 5) Your RV is now level.
- 6) Depress green power buttons on RV Level Base and the Hand-Held Module to turn power off.

NOTE: Your new RV Level has an effective range of 25'-30' and will accommodate vehicles up to 45' in length. The sensitivity of your new RV Level is +/- 1°.

## INFORMATION TO USER

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures.

- Reorient or relocate the existing antenna
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.