



FCC RF Test Report

APPLICANT : Sonim Technologies, Inc.
EQUIPMENT : Smartphone
BRAND NAME : Sonim
MODEL NAME : X802
FCC ID : WYPS3111
STANDARD : 47 CFR Part 22, 24
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Nov. 16, 2024 ~ Apr. 21, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (ShenZhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP and Emission Designator	6
1.7 Testing Location	8
1.8 Test Software	8
1.9 Applicable Standards	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode	10
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration and system	12
2.4 Measurement Results Explanation Example	13
2.5 Frequency List of Low/Middle/High Channels	13
3 CONDUCTED TEST ITEMS	15
3.1 Measuring Instruments	15
3.2 Test Setup	15
3.3 Test Result of Conducted Test	15
3.4 Conducted Output Power and ERP/EIRP	16
3.5 Peak-to-Average Ratio	17
3.6 Occupied Bandwidth	18
3.7 Conducted Band Edge	19
3.8 Conducted Spurious Emission	20
3.9 Frequency Stability	21
4 RADIATED TEST ITEMS	22
4.1 Measuring Instruments	22
4.2 Test Setup	22
4.3 Test Result of Radiated Test	23
4.4 Radiated Spurious Emission	24
5 LIST OF MEASURING EQUIPMENT	25
6 MEASUREMENT UNCERTAINTY	26
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG4O2403L	Rev. 01	Initial issue of report	May 22, 2025



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	-	PASS	-
	§22.913(a)(5)	Effective Radiated Power (5G NR n5, n26)	ERP < 7 Watt		
	§24.232(c)	Equivalent Isotropic Radiated Power (5G NR n2, n25)	EIRP < 2Watt		
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	-	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a)	Conducted Band Edge Measurement (5G NR n5, n26) (5G NR n2, n25)	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a)	Conducted Spurious Emission (5G NR n5, n26) (5G NR n2, n25)	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a)	Radiated Spurious Emission (5G NR n5, n26) (5G NR n2, n25)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 26.05 dB at 3781.500 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Sonim Technologies, Inc.

4445 Eastgate Mall,Suite200,San Diego,CA92121,USA

1.2 Manufacturer

Sonim Technologies, Inc.

4445 Eastgate Mall,Suite200,San Diego,CA92121,USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smartphone
Brand Name	Sonim
Model Name	X802
FCC ID	WYPS3111
HW Version	V1.0
SW Version	X80.0-01-14.0-42.18.00
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 824 MHz ~ 849 MHz
Rx Frequency	5G NR n2 : 1930 MHz ~ 1990 MHz 5G NR n5 : 869 MHz ~ 894 MHz 5G NR n25 : 1930 MHz ~ 1995 MHz 5G NR n26 : 869 MHz ~ 894 MHz
Bandwidth	n25 : 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz n2/n5/n26 : 5MHz / 10MHz / 15MHz / 20MHz
SCS	15kHz
Antenna Gain	<Ant. 1>: n5 : -6.26 dBi n26 : -6.26 dBi <Ant. 2>: n2 : 0.36 dBi n25 : 0.36 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. 5G NR support SA (n2/n5/n25/n26) mode and NSA(n2/n5/n26) mode. According to the maximum power between SA and NSA mode, SA covers NSA mode for n2/n5/n26.
2. All the supported ENDC combinations are verified conducted power, only the ENDC combination with highest power are shown in the report.
3. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP and Emission Designator

5G NR n2		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1852.5 ~ 1907.5	0.2742	4M48G7D	0.2138	4M48W7D
10	1855.0 ~ 1905.0	0.2692	9M29G7D	0.2070	9M29W7D
15	1857.5 ~ 1902.5	0.2786	14M1G7D	0.2133	14M1W7D
20	1860.0 ~ 1900.0	0.2858	19M0G7D	0.2188	19M0W7D



5G NR n25		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1852.5 ~ 1912.5	0.2655	4M48G7D	0.2080	4M48W7D
10	1855.0 ~ 1910.0	0.2636	9M29G7D	0.2061	9M29W7D
15	1857.5 ~ 1907.5	0.2891	14M1G7D	0.2143	14M1W7D
20	1860.0 ~ 1905.0	0.2704	19M0G7D	0.2138	19M0W7D
25	1862.5 ~ 1902.5	0.2723	23M8G7D	0.2109	23M8W7D
30	1865.0 ~ 1900.0	0.2698	28M5G7D	0.2109	28M6W7D

5G NR n5		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.0359	4M47G7D	0.0279	4M49W7D
10	829.0 ~ 844.0	0.0351	9M26G7D	0.0271	9M28W7D
15	831.5 ~ 841.5	0.0358	14M1G7D	0.0278	14M1W7D
20	834.0 ~ 839.0	0.0373	18M9G7D	0.0284	18M9W7D

5G NR n26		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.0385	4M47G7D	0.0303	4M49W7D
10	829.0 ~ 844.0	0.0383	9M26G7D	0.0302	9M28W7D
15	831.5 ~ 841.5	0.0393	14M1G7D	0.0310	14M1W7D
20	834.0 ~ 839.0	0.0400	18M9G7D	0.0309	18M9W7D

Note:

1. 5G NR n26 overlaps the entire frequency range of 5G NR n5. Therefore, the test results provided in this report covers 5G NR n5 and the portion of 5G NR n26 subject to Part 22.
2. 5G NR n25 overlaps the entire frequency range of 5G NR n2. Therefore, the test results provided in this report covers 5G NR n25 as well as 5G NR n2.
3. All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.



1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

Test data subcontracted: Radiated Spurious Emission test case in section 4.4 of this report

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24



1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 22, 24
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X/Z plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.


Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane

Test Items	5G NR	Bandwidth (MHz)													Modulation					RB #		Test Channel		
		5	10	15	20	25	30	35	40	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H
Max. Output Power	n2	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n5	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n25	v	v	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n26	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
Peak-to- Average Ratio	n25				v			-	-	-	-	-	-	-	v	v					v		v	
	n26				v	-	-	-	-	-	-	-	-	-	v	v					v		v	
26dB and 99% Bandwidth	n25	v	v	v	v	v	v	-	-	-	-	-	-	-		v	v	v	v		v		v	
	n26	v	v	v	v	-	-	-	-	-	-	-	-	-		v	v	v	v		v		v	
Conducted Band Edge	n25	v			v		v	-	-	-	-	-	-	-	v	v				v	v	v		v
	n26	v		v	v	-	-	-	-	-	-	-	-	-	v	v				v	v	v		v
Conducted Spurious Emission	n25	v			v		v	-	-	-	-	-	-	-	v	v				v		v	v	v
	n26	v		v	v	-	-	-	-	-	-	-	-	-	v	v				v		v	v	v
Frequency Stability	n25				v			-	-	-	-	-	-	-		v					v		v	
	n26				v	-	-	-	-	-	-	-	-	-		v					v		v	



Test Items	5G NR	Bandwidth (MHz)														Modulation					RB #		Test Channel		
		5	10	15	20	25	30	35	40	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H	
E.R.P / E.I.R.P	n2	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n5	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n25	v	v	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n26	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
Radiated Spurious Emission	n2	Worst Case																				v	v	v	
	n5	Worst Case																				v	v	v	
	n25	Worst Case																				v	v	v	
	n26	Worst Case																				v	v	v	
Note	1. The mark “v” means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.87V ; Low Voltage =3.65V. ; High Voltage =4.45V																								

2.2 Connection Diagram of Test System

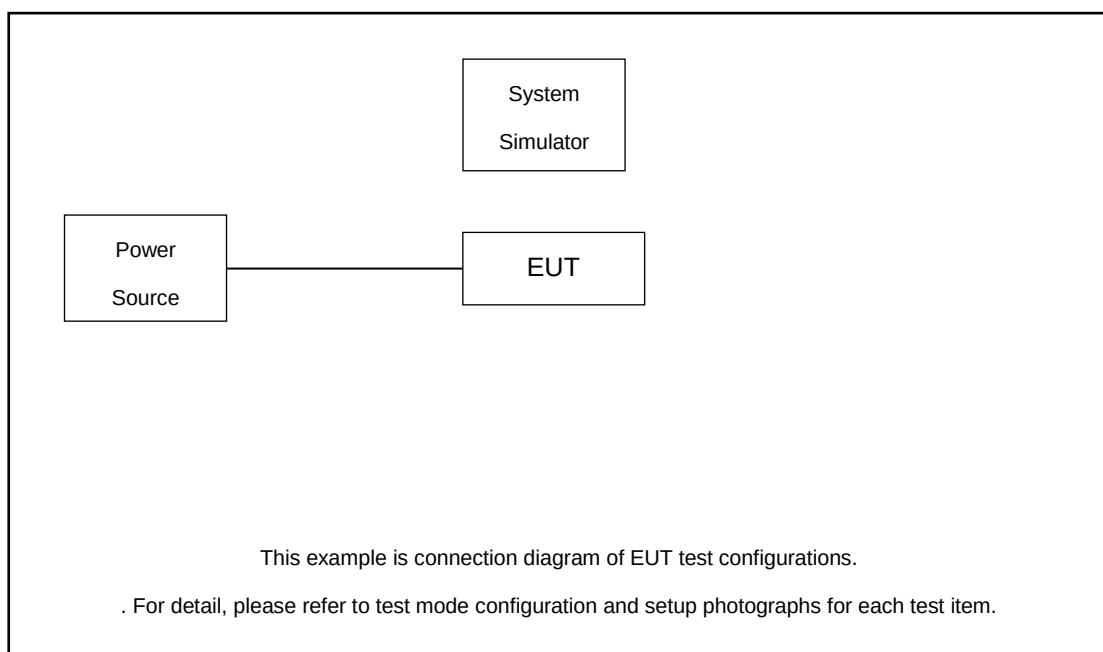

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.



2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.60 dB and 20dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.6 + 20 = 25.60 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5



5G NR n25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
30	Channel	389000	392500	396000
	Frequency	1865	1882.5	1900
25	Channel	388500	392500	396500
	Frequency	1862.5	1882.5	1902.5
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
15	Channel	371500	376500	381500
	Frequency	1857.5	1882.5	1907.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910
5	Channel	370500	376500	382500
	Frequency	1852.5	1882.5	1912.5

5G NR n26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

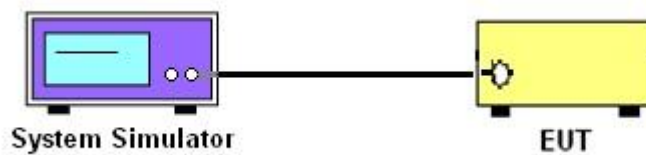

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

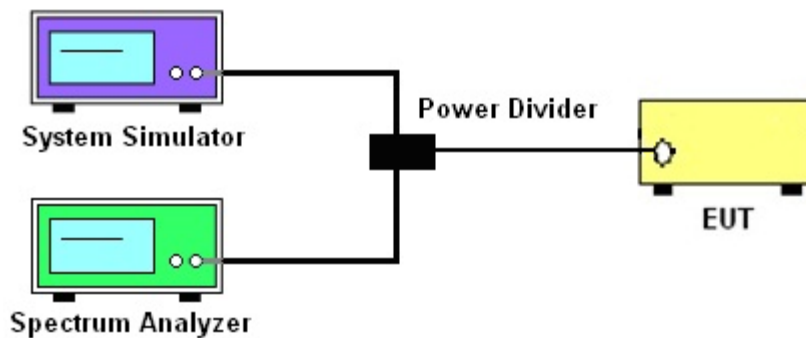

3.2.3 Frequency Stability

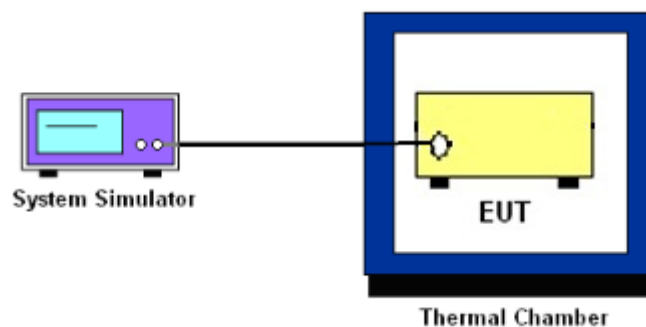

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5, n26.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n2, n25.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)\text{dB}$ below the transmitter power $P(\text{Watts})$

$$= P(\text{W}) - [43 + 10\log(P)] (\text{dB})$$

$$= [30 + 10\log(P)] (\text{dBm}) - [43 + 10\log(P)] (\text{dB}) = -13\text{dBm}.$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and power divider.
The path loss was compensated to the results for each measurement.
Path Loss Factor = Cable + Power Divider, Where the cable and power divider are the total path loss for the system calibration.
4. The low/middle/high channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

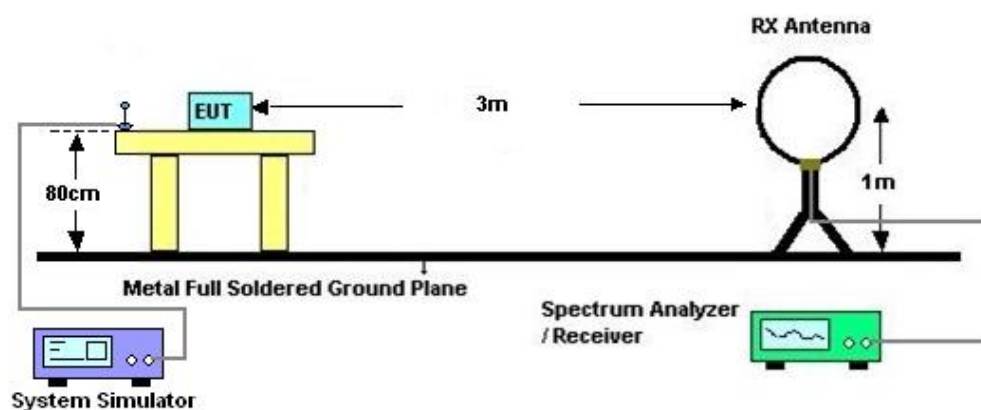

4.2.2 For radiated test from 30MHz to 1GHz

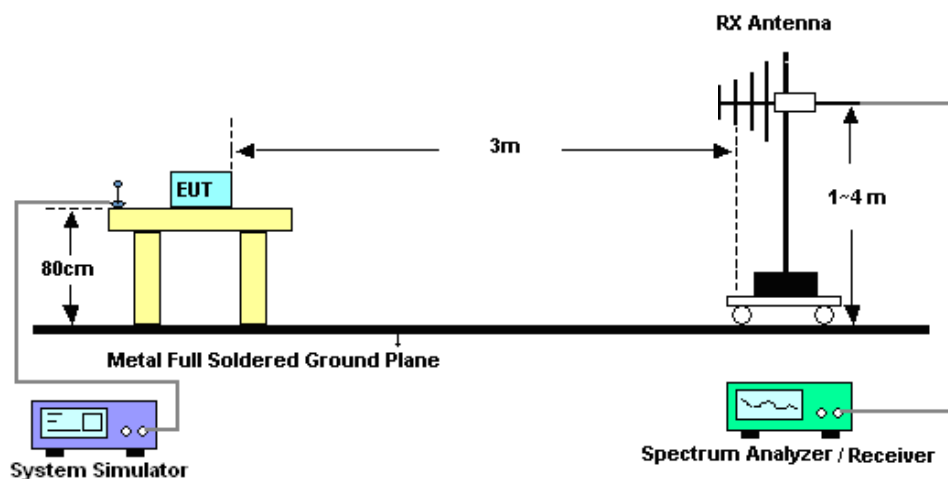

4.2.3 For radiated test above 1GHz

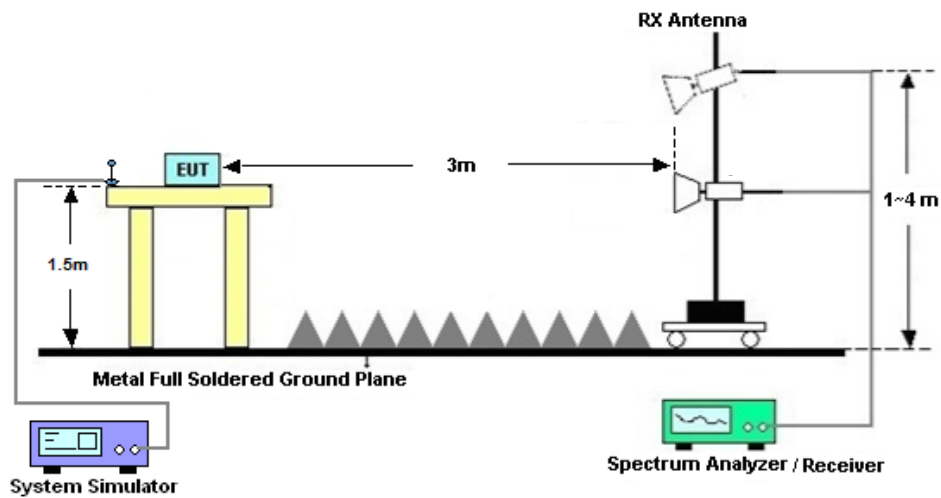

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 16, 2024~ Apr. 21, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Nov. 16, 2024~ Apr. 21, 2025	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H201401144 0	-40~+150°C 20%~95%RH	Jul. 04, 2024	Nov. 16, 2024~ Apr. 21, 2025	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY5515021 3	10Hz~44GHz	Jul. 03, 2024	Feb. 10, 2025	Jul. 02, 2025	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Feb. 10, 2025	Dec. 27, 2025	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY5327010 5	0.5GHz~26.5GHz	Oct. 14, 2024	Feb. 10, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Feb. 10, 2025	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Feb. 10, 2025	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 09, 2024	Feb. 10, 2025	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz~3GHz	Dec. 25, 2024	Feb. 10, 2025	Dec. 24, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30- 10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Feb. 10, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 03, 2024	Feb. 10, 2025	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	6160100019 85	N/A	Oct. 14, 2024	Feb. 10, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Feb. 10, 2025	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Feb. 10, 2025	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 2.22 dB
Occupied Channel Bandwidth	$\pm 0.1\%$
Conducted Power	± 0.50 dB
Peak to Average Ratio	± 0.90 dB
Frequency Stability	± 0.04 ppm

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.48 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.53 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.02 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23℃
		Relative Humidity :	40~42%



FR1 N2 ANT2

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=0.36dB

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
2	15	5	370500	1852.5	DFT-s-OFDM PI/2 BPSK	1@1	24.02	24.38	0.2742
2	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@1	23.89	24.25	0.2661
2	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	22.94	23.30	0.2138
2	15	5	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	23.72	24.08	0.2559
2	15	5	376000	1880	DFT-s-OFDM QPSK	1@1	23.87	24.23	0.2649
2	15	5	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.77	23.13	0.2056
2	15	5	381500	1907.5	DFT-s-OFDM PI/2 BPSK	1@1	22.54	22.90	0.1950
2	15	5	381500	1907.5	DFT-s-OFDM QPSK	1@1	22.24	22.60	0.1820
2	15	5	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	21.36	21.72	0.1486
2	15	10	371000	1855	DFT-s-OFDM PI/2 BPSK	1@1	23.94	24.30	0.2692
2	15	10	371000	1855	DFT-s-OFDM QPSK	1@1	23.45	23.81	0.2404
2	15	10	371000	1855	DFT-s-OFDM 16 QAM	1@1	22.70	23.06	0.2023
2	15	10	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	23.78	24.14	0.2594
2	15	10	376000	1880	DFT-s-OFDM QPSK	1@1	23.84	24.20	0.2630
2	15	10	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.80	23.16	0.2070
2	15	10	381000	1905	DFT-s-OFDM PI/2 BPSK	1@1	23.02	23.38	0.2178
2	15	10	381000	1905	DFT-s-OFDM QPSK	1@1	22.79	23.15	0.2065
2	15	10	381000	1905	DFT-s-OFDM 16 QAM	1@1	21.80	22.16	0.1644
2	15	15	371500	1857.5	DFT-s-OFDM PI/2 BPSK	1@1	24.09	24.45	0.2786
2	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	23.80	24.16	0.2606
2	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	22.83	23.19	0.2084
2	15	15	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	23.98	24.34	0.2716
2	15	15	376000	1880	DFT-s-OFDM QPSK	1@1	24.03	24.39	0.2748
2	15	15	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.93	23.29	0.2133
2	15	15	380500	1902.5	DFT-s-OFDM PI/2 BPSK	1@1	23.69	24.05	0.2541
2	15	15	380500	1902.5	DFT-s-OFDM QPSK	1@1	23.44	23.80	0.2399
2	15	15	380500	1902.5	DFT-s-OFDM 16 QAM	1@1	22.46	22.82	0.1914
2	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	50@25	24.20	24.56	0.2858
2	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	1@1	23.92	24.28	0.2679
2	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	1@104	23.99	24.35	0.2723
2	15	20	372000	1860	DFT-s-OFDM QPSK	50@25	23.88	24.24	0.2655
2	15	20	372000	1860	DFT-s-OFDM QPSK	1@1	23.73	24.09	0.2564
2	15	20	372000	1860	DFT-s-OFDM QPSK	1@104	24.00	24.36	0.2729
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	50@25	22.97	23.33	0.2153
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@1	22.81	23.17	0.2075
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@104	22.95	23.31	0.2143
2	15	20	372000	1860	DFT-s-OFDM 64 QAM	50@25	21.61	21.97	0.1574
2	15	20	372000	1860	DFT-s-OFDM 64 QAM	1@1	21.73	22.09	0.1618
2	15	20	372000	1860	DFT-s-OFDM 64 QAM	1@104	21.64	22.00	0.1585



2	15	20	372000	1860	DFT-s-OFDM 256 QAM	50@25	19.70	20.06	0.1014
2	15	20	372000	1860	DFT-s-OFDM 256 QAM	1@1	18.95	19.31	0.0853
2	15	20	372000	1860	DFT-s-OFDM 256 QAM	1@104	18.87	19.23	0.0838
2	15	20	372000	1860	CP-OFDM QPSK	53@26	22.42	22.78	0.1897
2	15	20	372000	1860	CP-OFDM QPSK	1@1	22.47	22.83	0.1919
2	15	20	372000	1860	CP-OFDM QPSK	1@104	22.54	22.90	0.1950
2	15	20	376000	1880	DFT-s-OFDM PI/2 BPSK	50@25	24.00	24.36	0.2729
2	15	20	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	23.90	24.26	0.2667
2	15	20	376000	1880	DFT-s-OFDM PI/2 BPSK	1@104	23.79	24.15	0.2600
2	15	20	376000	1880	DFT-s-OFDM QPSK	50@25	24.02	24.38	0.2742
2	15	20	376000	1880	DFT-s-OFDM QPSK	1@1	24.00	24.36	0.2729
2	15	20	376000	1880	DFT-s-OFDM QPSK	1@104	23.66	24.02	0.2523
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	50@25	23.04	23.40	0.2188
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.84	23.20	0.2089
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	1@104	22.77	23.13	0.2056
2	15	20	376000	1880	DFT-s-OFDM 64 QAM	50@25	21.60	21.96	0.1570
2	15	20	376000	1880	DFT-s-OFDM 64 QAM	1@1	21.64	22.00	0.1585
2	15	20	376000	1880	DFT-s-OFDM 64 QAM	1@104	21.80	22.16	0.1644
2	15	20	376000	1880	DFT-s-OFDM 256 QAM	50@25	21.66	22.02	0.1592
2	15	20	376000	1880	DFT-s-OFDM 256 QAM	1@1	18.93	19.29	0.0849
2	15	20	376000	1880	DFT-s-OFDM 256 QAM	1@104	19.09	19.45	0.0881
2	15	20	376000	1880	CP-OFDM QPSK	53@26	22.46	22.82	0.1914
2	15	20	376000	1880	CP-OFDM QPSK	1@1	22.54	22.90	0.1950
2	15	20	376000	1880	CP-OFDM QPSK	1@104	22.63	22.99	0.1991
2	15	20	380000	1900	DFT-s-OFDM PI/2 BPSK	50@25	23.67	24.03	0.2529
2	15	20	380000	1900	DFT-s-OFDM PI/2 BPSK	1@1	24.00	24.36	0.2729
2	15	20	380000	1900	DFT-s-OFDM PI/2 BPSK	1@104	22.83	23.19	0.2084
2	15	20	380000	1900	DFT-s-OFDM QPSK	50@25	22.98	23.34	0.2158
2	15	20	380000	1900	DFT-s-OFDM QPSK	1@1	23.87	24.23	0.2649
2	15	20	380000	1900	DFT-s-OFDM QPSK	1@104	22.68	23.04	0.2014
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	50@25	21.99	22.35	0.1718
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	1@1	22.85	23.21	0.2094
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	1@104	21.74	22.10	0.1622
2	15	20	380000	1900	DFT-s-OFDM 64 QAM	50@25	20.74	21.10	0.1288
2	15	20	380000	1900	DFT-s-OFDM 64 QAM	1@1	21.82	22.18	0.1652
2	15	20	380000	1900	DFT-s-OFDM 64 QAM	1@104	21.02	21.38	0.1374
2	15	20	380000	1900	DFT-s-OFDM 256 QAM	50@25	19.12	19.48	0.0887
2	15	20	380000	1900	DFT-s-OFDM 256 QAM	1@1	19.13	19.49	0.0889
2	15	20	380000	1900	DFT-s-OFDM 256 QAM	1@104	18.53	18.89	0.0774
2	15	20	380000	1900	CP-OFDM QPSK	53@26	21.30	21.66	0.1466
2	15	20	380000	1900	CP-OFDM QPSK	1@1	22.51	22.87	0.1936
2	15	20	380000	1900	CP-OFDM QPSK	1@104	21.33	21.69	0.1476



FR1 N5 ANT1

Transmitter Conducted Output Power And ERP, (G_T - L_c)=-6.26dB

NR Band	SCS	Band Width	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	ERP(dBm)	ERP(W)
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	50@25	23.97	15.56	0.0360
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	1@1	23.92	15.51	0.0356
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	1@104	23.56	15.15	0.0327
5	15	20	166800	834	DFT-s-OFDM QPSK	50@25	23.90	15.49	0.0354
5	15	20	166800	834	DFT-s-OFDM QPSK	1@1	23.98	15.57	0.0361
5	15	20	166800	834	DFT-s-OFDM QPSK	1@104	23.79	15.38	0.0345
5	15	20	166800	834	DFT-s-OFDM 16 QAM	50@25	22.94	14.53	0.0284
5	15	20	166800	834	DFT-s-OFDM 16 QAM	1@1	22.80	14.39	0.0275
5	15	20	166800	834	DFT-s-OFDM 16 QAM	1@104	22.60	14.19	0.0262
5	15	20	166800	834	DFT-s-OFDM 64 QAM	50@25	21.49	13.08	0.0203
5	15	20	166800	834	DFT-s-OFDM 64 QAM	1@1	21.59	13.18	0.0208
5	15	20	166800	834	DFT-s-OFDM 64 QAM	1@104	21.44	13.03	0.0201
5	15	20	166800	834	DFT-s-OFDM 256 QAM	50@25	19.51	11.10	0.0129
5	15	20	166800	834	DFT-s-OFDM 256 QAM	1@1	18.83	10.42	0.0110
5	15	20	166800	834	DFT-s-OFDM 256 QAM	1@104	18.75	10.34	0.0108
5	15	20	166800	834	CP-OFDM QPSK	53@26	22.52	14.11	0.0258
5	15	20	166800	834	CP-OFDM QPSK	1@1	22.47	14.06	0.0255
5	15	20	166800	834	CP-OFDM QPSK	1@104	22.23	13.82	0.0241
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	50@25	23.91	15.50	0.0355
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	24.02	15.61	0.0364
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@104	23.55	15.14	0.0327
5	15	20	167300	836.5	DFT-s-OFDM QPSK	50@25	24.02	15.61	0.0364
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@1	24.13	15.72	0.0373
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@104	23.52	15.11	0.0324
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	50@25	22.88	14.47	0.0280
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@1	22.95	14.54	0.0284
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@104	22.62	14.21	0.0264
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	50@25	21.51	13.10	0.0204
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@1	21.74	13.33	0.0215
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@104	21.37	12.96	0.0198
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	50@25	19.63	11.22	0.0132
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@1	18.90	10.49	0.0112
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@104	18.61	10.20	0.0105
5	15	20	167300	836.5	CP-OFDM QPSK	53@26	22.47	14.06	0.0255
5	15	20	167300	836.5	CP-OFDM QPSK	1@1	22.49	14.08	0.0256
5	15	20	167300	836.5	CP-OFDM QPSK	1@104	21.92	13.51	0.0224
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	50@25	23.91	15.50	0.0355
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	1@1	23.87	15.46	0.0352
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	1@104	23.55	15.14	0.0327



5	15	20	167800	839	DFT-s-OFDM QPSK	50@25	23.91	15.50	0.0355
5	15	20	167800	839	DFT-s-OFDM QPSK	1@1	23.98	15.57	0.0361
5	15	20	167800	839	DFT-s-OFDM QPSK	1@104	23.73	15.32	0.0340
5	15	20	167800	839	DFT-s-OFDM 16 QAM	50@25	22.95	14.54	0.0284
5	15	20	167800	839	DFT-s-OFDM 16 QAM	1@1	22.78	14.37	0.0274
5	15	20	167800	839	DFT-s-OFDM 16 QAM	1@104	22.58	14.17	0.0261
5	15	20	167800	839	DFT-s-OFDM 64 QAM	50@25	21.51	13.10	0.0204
5	15	20	167800	839	DFT-s-OFDM 64 QAM	1@1	21.62	13.21	0.0209
5	15	20	167800	839	DFT-s-OFDM 64 QAM	1@104	21.31	12.90	0.0195
5	15	20	167800	839	DFT-s-OFDM 256 QAM	50@25	19.42	11.01	0.0126
5	15	20	167800	839	DFT-s-OFDM 256 QAM	1@1	18.85	10.44	0.0111
5	15	20	167800	839	DFT-s-OFDM 256 QAM	1@104	18.51	10.10	0.0102
5	15	20	167800	839	CP-OFDM QPSK	53@26	22.37	13.96	0.0249
5	15	20	167800	839	CP-OFDM QPSK	1@1	22.30	13.89	0.0245
5	15	20	167800	839	CP-OFDM QPSK	1@104	21.86	13.45	0.0221
5	15	5	165300	826.5	DFT-s-OFDM PI/2 BPSK	1@1	23.96	15.55	0.0359
5	15	5	165300	826.5	DFT-s-OFDM QPSK	1@1	23.94	15.53	0.0357
5	15	5	165300	826.5	DFT-s-OFDM 16 QAM	1@1	22.86	14.45	0.0279
5	15	5	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	23.76	15.35	0.0343
5	15	5	167300	836.5	DFT-s-OFDM QPSK	1@1	23.87	15.46	0.0352
5	15	5	167300	836.5	DFT-s-OFDM 16 QAM	1@1	22.80	14.39	0.0275
5	15	5	169300	846.5	DFT-s-OFDM PI/2 BPSK	1@1	23.64	15.23	0.0333
5	15	5	169300	846.5	DFT-s-OFDM QPSK	1@1	23.62	15.21	0.0332
5	15	5	169300	846.5	DFT-s-OFDM 16 QAM	1@1	22.61	14.20	0.0263
5	15	10	165800	829	DFT-s-OFDM PI/2 BPSK	1@1	23.86	15.45	0.0351
5	15	10	165800	829	DFT-s-OFDM QPSK	1@1	23.84	15.43	0.0349
5	15	10	165800	829	DFT-s-OFDM 16 QAM	1@1	22.74	14.33	0.0271
5	15	10	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	23.77	15.36	0.0344
5	15	10	167300	836.5	DFT-s-OFDM QPSK	1@1	23.78	15.37	0.0344
5	15	10	167300	836.5	DFT-s-OFDM 16 QAM	1@1	22.66	14.25	0.0266
5	15	10	168800	844	DFT-s-OFDM PI/2 BPSK	1@1	23.68	15.27	0.0337
5	15	10	168800	844	DFT-s-OFDM QPSK	1@1	23.69	15.28	0.0337
5	15	10	168800	844	DFT-s-OFDM 16 QAM	1@1	22.69	14.28	0.0268
5	15	15	166300	831.5	DFT-s-OFDM PI/2 BPSK	1@1	23.93	15.52	0.0356
5	15	15	166300	831.5	DFT-s-OFDM QPSK	1@1	23.95	15.54	0.0358
5	15	15	166300	831.5	DFT-s-OFDM 16 QAM	1@1	22.85	14.44	0.0278
5	15	15	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	23.84	15.43	0.0349
5	15	15	167300	836.5	DFT-s-OFDM QPSK	1@1	23.94	15.53	0.0357
5	15	15	167300	836.5	DFT-s-OFDM 16 QAM	1@1	22.79	14.38	0.0274
5	15	15	168300	841.5	DFT-s-OFDM PI/2 BPSK	1@1	23.83	15.42	0.0348
5	15	15	168300	841.5	DFT-s-OFDM QPSK	1@1	23.85	15.44	0.0350
5	15	15	168300	841.5	DFT-s-OFDM 16 QAM	1@1	22.85	14.44	0.0278



Software Version: 23.06.1602

FR1 N25 ANT2

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=0.36 dB

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
25	15	5	370500	1852.5	DFT-s-OFDM PI/2 BPSK	1@1	23.88	24.24	0.2655
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@1	23.84	24.20	0.2630
25	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	22.82	23.18	0.2080
25	15	5	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	23.67	24.03	0.2529
25	15	5	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.65	24.01	0.2518
25	15	5	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.65	23.01	0.2000
25	15	5	382500	1912.5	DFT-s-OFDM PI/2 BPSK	1@1	23.11	23.47	0.2223
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	1@1	22.79	23.15	0.2065
25	15	5	382500	1912.5	DFT-s-OFDM 16 QAM	1@1	21.79	22.15	0.1641
25	15	10	371000	1855	DFT-s-OFDM PI/2 BPSK	1@1	23.83	24.19	0.2624
25	15	10	371000	1855	DFT-s-OFDM QPSK	1@1	23.85	24.21	0.2636
25	15	10	371000	1855	DFT-s-OFDM 16 QAM	1@1	22.78	23.14	0.2061
25	15	10	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	23.67	24.03	0.2529
25	15	10	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.60	23.96	0.2489
25	15	10	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.58	22.94	0.1968
25	15	10	382000	1910	DFT-s-OFDM PI/2 BPSK	1@1	22.37	22.73	0.1875
25	15	10	382000	1910	DFT-s-OFDM QPSK	1@1	22.14	22.50	0.1778
25	15	10	382000	1910	DFT-s-OFDM 16 QAM	1@1	21.10	21.46	0.1400
25	15	15	371500	1857.5	DFT-s-OFDM PI/2 BPSK	1@1	24.01	24.37	0.2735
25	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	24.25	24.61	0.2891
25	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	22.95	23.31	0.2143
25	15	15	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	23.81	24.17	0.2612
25	15	15	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.85	24.21	0.2636
25	15	15	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.83	23.19	0.2084
25	15	15	381500	1907.5	DFT-s-OFDM PI/2 BPSK	1@1	22.90	23.26	0.2118
25	15	15	381500	1907.5	DFT-s-OFDM QPSK	1@1	22.60	22.96	0.1977
25	15	15	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	21.60	21.96	0.1570
25	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	1@1	23.90	24.26	0.2667
25	15	20	372000	1860	DFT-s-OFDM QPSK	1@1	23.96	24.32	0.2704
25	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@1	22.94	23.30	0.2138
25	15	20	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	23.74	24.10	0.2570
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.79	24.15	0.2600
25	15	20	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.80	23.16	0.2070
25	15	20	381000	1905	DFT-s-OFDM PI/2 BPSK	1@1	23.39	23.75	0.2371



25	15	20	381000	1905	DFT-s-OFDM QPSK	1@1	23.17	23.53	0.2254
25	15	20	381000	1905	DFT-s-OFDM 16 QAM	1@1	22.19	22.55	0.1799
25	15	25	372500	1862.5	DFT-s-OFDM PI/2 BPSK	1@1	23.96	24.32	0.2704
25	15	25	372500	1862.5	DFT-s-OFDM QPSK	1@1	23.99	24.35	0.2723
25	15	25	372500	1862.5	DFT-s-OFDM 16 QAM	1@1	22.88	23.24	0.2109
25	15	25	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	23.82	24.18	0.2618
25	15	25	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.88	24.24	0.2655
25	15	25	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.73	23.09	0.2037
25	15	25	380500	1902.5	DFT-s-OFDM PI/2 BPSK	1@1	23.93	24.29	0.2685
25	15	25	380500	1902.5	DFT-s-OFDM QPSK	1@1	23.94	24.30	0.2692
25	15	25	380500	1902.5	DFT-s-OFDM 16 QAM	1@1	22.76	23.12	0.2051
25	15	30	373000	1865	DFT-s-OFDM PI/2 BPSK	80@40	23.85	24.21	0.2636
25	15	30	373000	1865	DFT-s-OFDM PI/2 BPSK	1@1	23.88	24.24	0.2655
25	15	30	373000	1865	DFT-s-OFDM PI/2 BPSK	1@158	23.76	24.12	0.2582
25	15	30	373000	1865	DFT-s-OFDM QPSK	80@40	23.95	24.31	0.2698
25	15	30	373000	1865	DFT-s-OFDM QPSK	1@1	23.89	24.25	0.2661
25	15	30	373000	1865	DFT-s-OFDM QPSK	1@158	23.74	24.10	0.2570
25	15	30	373000	1865	DFT-s-OFDM 16 QAM	80@40	22.88	23.24	0.2109
25	15	30	373000	1865	DFT-s-OFDM 16 QAM	1@1	22.85	23.21	0.2094
25	15	30	373000	1865	DFT-s-OFDM 16 QAM	1@158	22.74	23.10	0.2042
25	15	30	373000	1865	DFT-s-OFDM 64 QAM	80@40	21.43	21.79	0.1510
25	15	30	373000	1865	DFT-s-OFDM 64 QAM	1@1	21.58	21.94	0.1563
25	15	30	373000	1865	DFT-s-OFDM 64 QAM	1@158	21.51	21.87	0.1538
25	15	30	373000	1865	DFT-s-OFDM 256 QAM	80@40	19.34	19.70	0.0933
25	15	30	373000	1865	DFT-s-OFDM 256 QAM	1@1	18.84	19.20	0.0832
25	15	30	373000	1865	DFT-s-OFDM 256 QAM	1@158	18.85	19.21	0.0834
25	15	30	373000	1865	CP-OFDM QPSK	80@40	22.44	22.80	0.1905
25	15	30	373000	1865	CP-OFDM QPSK	1@1	22.34	22.70	0.1862
25	15	30	373000	1865	CP-OFDM QPSK	1@158	22.34	22.70	0.1862
25	15	30	376500	1882.5	DFT-s-OFDM PI/2 BPSK	80@40	23.82	24.18	0.2618
25	15	30	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	23.73	24.09	0.2564
25	15	30	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@158	23.54	23.90	0.2455
25	15	30	376500	1882.5	DFT-s-OFDM QPSK	80@40	23.86	24.22	0.2642
25	15	30	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.78	24.14	0.2594
25	15	30	376500	1882.5	DFT-s-OFDM QPSK	1@158	23.78	24.14	0.2594
25	15	30	376500	1882.5	DFT-s-OFDM 16 QAM	80@40	22.73	23.09	0.2037
25	15	30	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.65	23.01	0.2000
25	15	30	376500	1882.5	DFT-s-OFDM 16 QAM	1@158	22.58	22.94	0.1968
25	15	30	376500	1882.5	DFT-s-OFDM 64 QAM	80@40	21.36	21.72	0.1486
25	15	30	376500	1882.5	DFT-s-OFDM 64 QAM	1@1	21.51	21.87	0.1538
25	15	30	376500	1882.5	DFT-s-OFDM 64 QAM	1@158	21.37	21.73	0.1489
25	15	30	376500	1882.5	DFT-s-OFDM 256 QAM	80@40	18.36	18.72	0.0745



25	15	30	376500	1882.5	DFT-s-OFDM 256 QAM	1@1	18.73	19.09	0.0811
25	15	30	376500	1882.5	DFT-s-OFDM 256 QAM	1@158	18.67	19.03	0.0800
25	15	30	376500	1882.5	CP-OFDM QPSK	80@40	22.31	22.67	0.1849
25	15	30	376500	1882.5	CP-OFDM QPSK	1@1	22.29	22.65	0.1841
25	15	30	376500	1882.5	CP-OFDM QPSK	1@158	22.12	22.48	0.1770
25	15	30	380000	1900	DFT-s-OFDM PI/2 BPSK	80@40	23.63	23.99	0.2506
25	15	30	380000	1900	DFT-s-OFDM PI/2 BPSK	1@1	23.84	24.20	0.2630
25	15	30	380000	1900	DFT-s-OFDM PI/2 BPSK	1@158	23.21	23.57	0.2275
25	15	30	380000	1900	DFT-s-OFDM QPSK	80@40	23.48	23.84	0.2421
25	15	30	380000	1900	DFT-s-OFDM QPSK	1@1	23.91	24.27	0.2673
25	15	30	380000	1900	DFT-s-OFDM QPSK	1@158	22.92	23.28	0.2128
25	15	30	380000	1900	DFT-s-OFDM 16 QAM	80@40	22.45	22.81	0.1910
25	15	30	380000	1900	DFT-s-OFDM 16 QAM	1@1	22.85	23.21	0.2094
25	15	30	380000	1900	DFT-s-OFDM 16 QAM	1@158	22.10	22.46	0.1762
25	15	30	380000	1900	DFT-s-OFDM 64 QAM	80@40	21.12	21.48	0.1406
25	15	30	380000	1900	DFT-s-OFDM 64 QAM	1@1	21.62	21.98	0.1578
25	15	30	380000	1900	DFT-s-OFDM 64 QAM	1@158	21.40	21.76	0.1500
25	15	30	380000	1900	DFT-s-OFDM 256 QAM	80@40	19.52	19.88	0.0973
25	15	30	380000	1900	DFT-s-OFDM 256 QAM	1@1	19.02	19.38	0.0867
25	15	30	380000	1900	DFT-s-OFDM 256 QAM	1@158	18.68	19.04	0.0802
25	15	30	380000	1900	CP-OFDM QPSK	80@40	22.13	22.49	0.1774
25	15	30	380000	1900	CP-OFDM QPSK	1@1	22.48	22.84	0.1923
25	15	30	380000	1900	CP-OFDM QPSK	1@158	21.78	22.14	0.1637



Frequency Stability




NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	0.0025	PASS	NV
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	-0.0023	PASS	LV
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	-0.0041	PASS	HV
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	0.0049	PASS	-30℃
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	-0.0043	PASS	-20℃
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	0.0022	PASS	-10℃
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	0.0025	PASS	0℃
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	-0.0019	PASS	10℃
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	-0.0012	PASS	20℃
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	-0.0034	PASS	30℃
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	-0.0031	PASS	40℃
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	0.0027	PASS	50℃

**Peak to Average Ratio**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	6.58	13	PASS
25	15	20	376500	1882.5	CP-OFDM QPSK	1@0	5.46	13	PASS
25	15	20	376500	1882.5	CP-OFDM 16 QAM	106@0	6.69	13	PASS
25	15	20	376500	1882.5	CP-OFDM 16 QAM	1@0	6.07	13	PASS



N25(20M)_CP-
OFDM QPSK Outer Full Mid CH





Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
25	15	5	376500	1882.5	CP-OFDM QPSK	25@0	4.4793	5.026
25	15	5	376500	1882.5	CP-OFDM 16 QAM	25@0	4.471	5.051
25	15	5	376500	1882.5	CP-OFDM 64 QAM	25@0	4.481	5.099
25	15	5	376500	1882.5	CP-OFDM 256 QAM	25@0	4.4785	5.119
25	15	10	376500	1882.5	CP-OFDM QPSK	52@0	9.286	10.02
25	15	10	376500	1882.5	CP-OFDM 16 QAM	52@0	9.288	9.998
25	15	10	376500	1882.5	CP-OFDM 64 QAM	52@0	9.2894	10.08
25	15	10	376500	1882.5	CP-OFDM 256 QAM	52@0	9.2714	10.06
25	15	15	376500	1882.5	CP-OFDM QPSK	79@0	14.083	14.92
25	15	15	376500	1882.5	CP-OFDM 16 QAM	79@0	14.116	14.86
25	15	15	376500	1882.5	CP-OFDM 64 QAM	79@0	14.116	14.84
25	15	15	376500	1882.5	CP-OFDM 256 QAM	79@0	14.147	14.97
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	18.955	19.86
25	15	20	376500	1882.5	CP-OFDM 16 QAM	106@0	18.91	19.89
25	15	20	376500	1882.5	CP-OFDM 64 QAM	106@0	18.935	19.91
25	15	20	376500	1882.5	CP-OFDM 256 QAM	106@0	19.015	19.96
25	15	25	376500	1882.5	CP-OFDM QPSK	133@0	23.761	24.76
25	15	25	376500	1882.5	CP-OFDM 16 QAM	133@0	23.747	24.83
25	15	25	376500	1882.5	CP-OFDM 64 QAM	133@0	23.719	24.81
25	15	25	376500	1882.5	CP-OFDM 256 QAM	133@0	23.755	24.77
25	15	30	376500	1882.5	CP-OFDM QPSK	160@0	28.52	29.67
25	15	30	376500	1882.5	CP-OFDM 16 QAM	160@0	28.528	29.86
25	15	30	376500	1882.5	CP-OFDM 64 QAM	160@0	28.568	29.64
25	15	30	376500	1882.5	CP-OFDM 256 QAM	160@0	28.561	29.58



N25(5M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N25(5M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH





N25(5M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH



N25(5M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

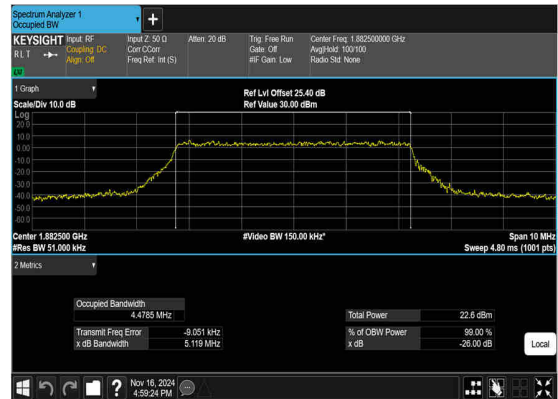

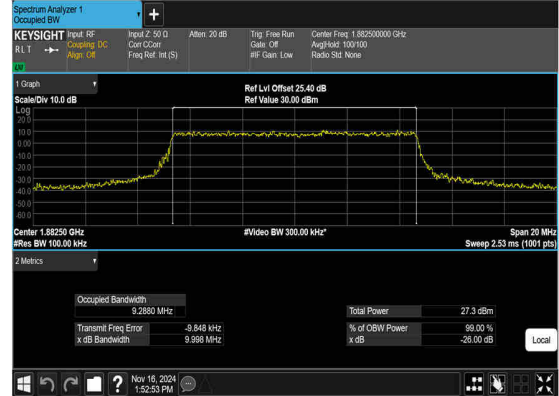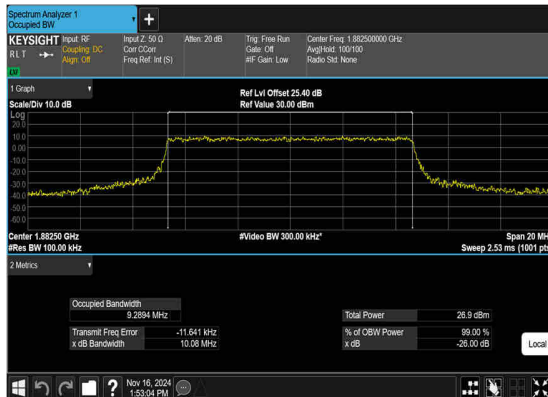N25(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CHN25(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CHN25(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CHN25(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH




N25(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N25(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH



N25(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

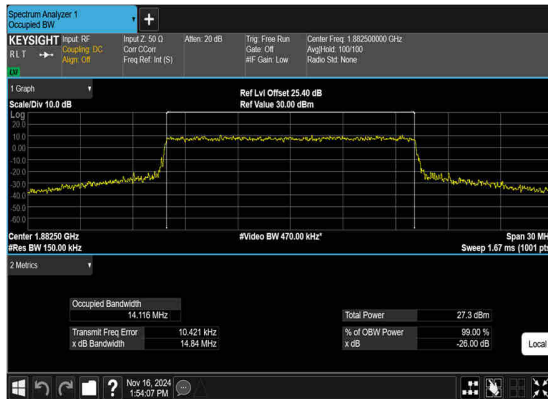

N25(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

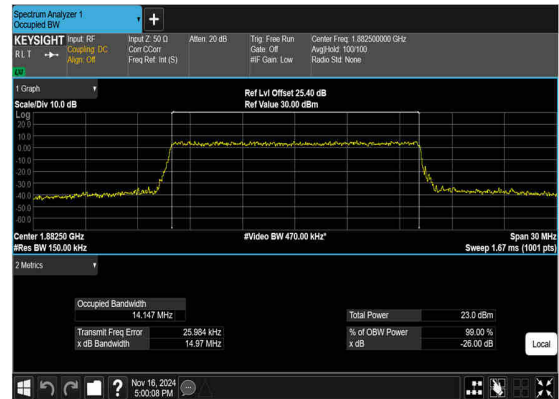




N25(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N25(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH



N25(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

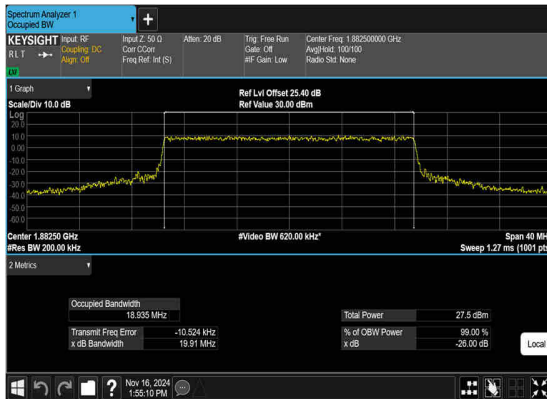

N25(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

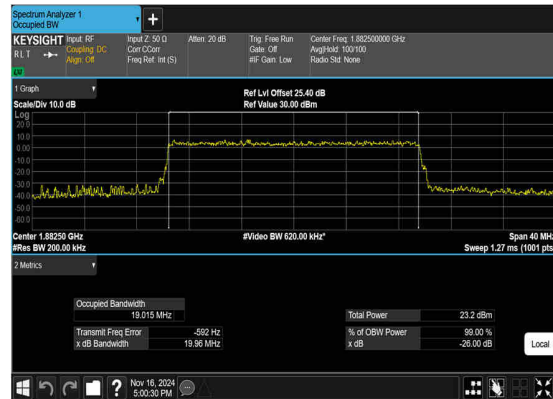



N25(25M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N25(25M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH



N25(25M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH



N25(25M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

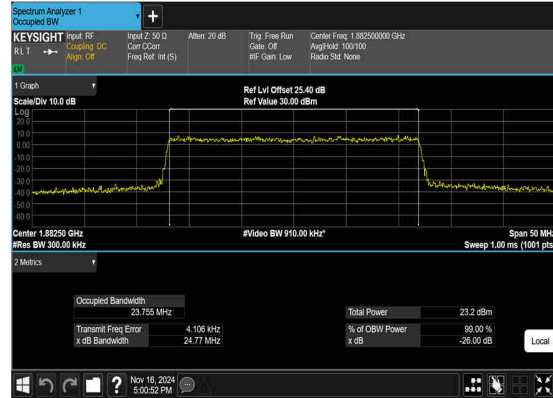




N25(30M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N25(30M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH



N25(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

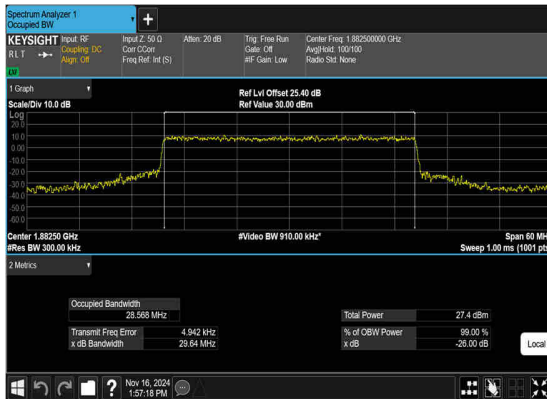

N25(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

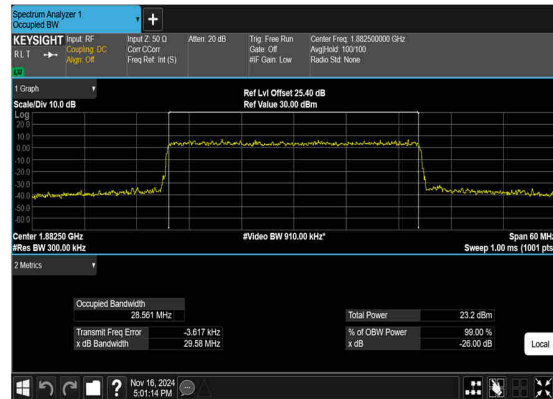



Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
25	15	5	370500	1852.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	5	370500	1852.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	5	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	5	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	5	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	5	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	5	382500	1912.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	20	372000	1860.0	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	20	372000	1860.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	20	372000	1860.0	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	20	372000	1860.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	20	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	20	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	PASS



25	15	20	381000	1905.0	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	20	381000	1905.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	20	381000	1905.0	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	20	381000	1905.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	30	373000	1865.0	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	30	373000	1865.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	30	373000	1865.0	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	30	373000	1865.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	30	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	30	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	30	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	30	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	30	380000	1900.0	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	30	380000	1900.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	30	380000	1900.0	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	30	380000	1900.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




N25(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

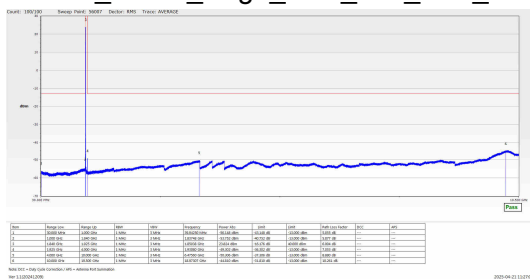


2025-04-23 11:27:03

N25(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

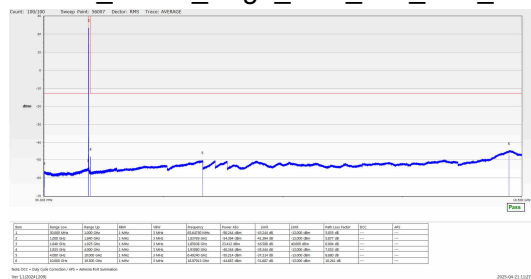


2025-04-23 13:27:29

N25(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

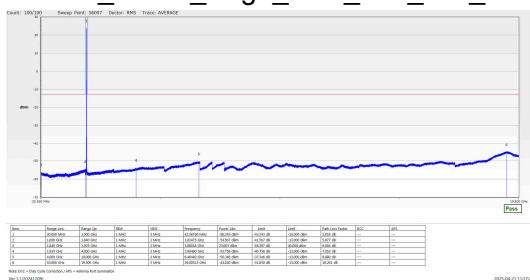

RESEARCH DESIGN


N25(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

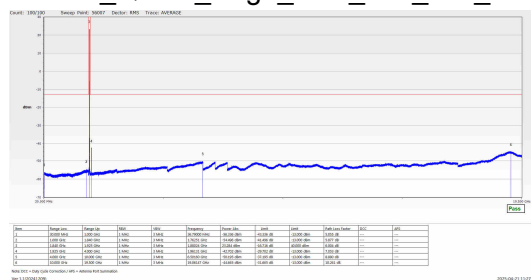


2025-06-23 13:22:06




N25(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

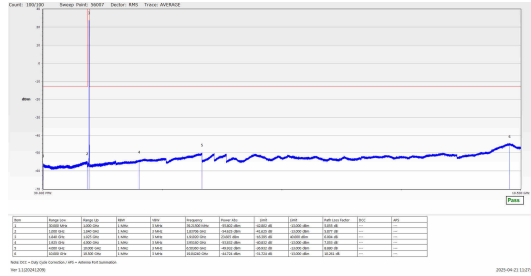


N25(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

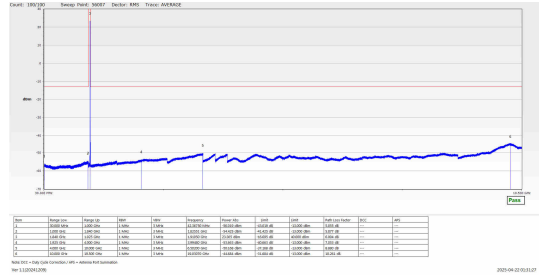

N25(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

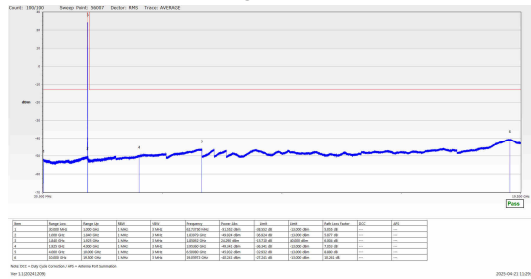


N25(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

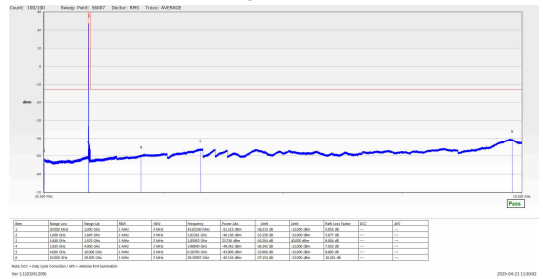




N25(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

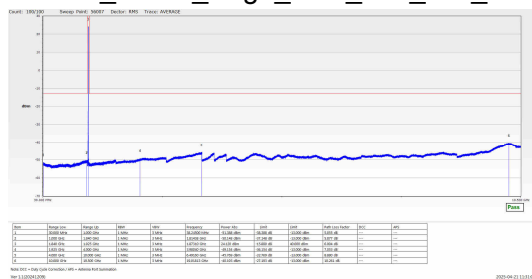


2025-04-23 11:31:02

N25(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

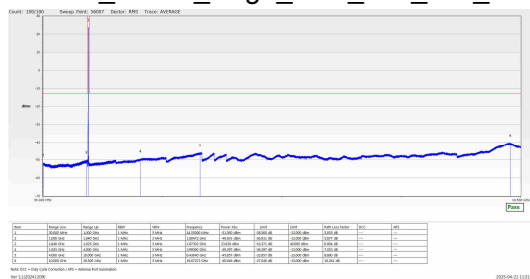


2025-04-23 11:51:08

N25(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

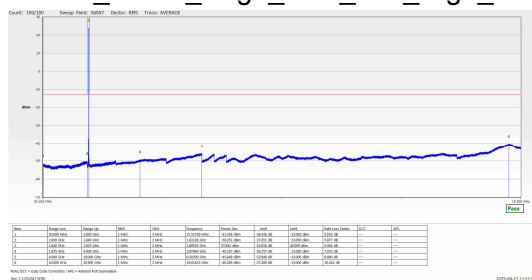

2025-04-23 12:31:05


N25(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

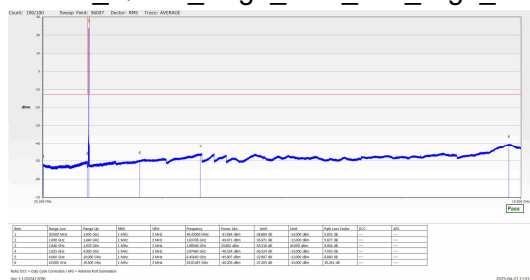

2025-04-23 13:51:59




N25(30M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

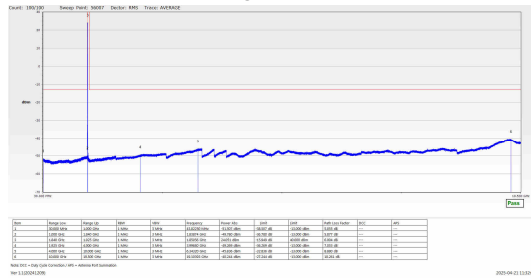


2025-04-23 11:32:09

N25(30M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

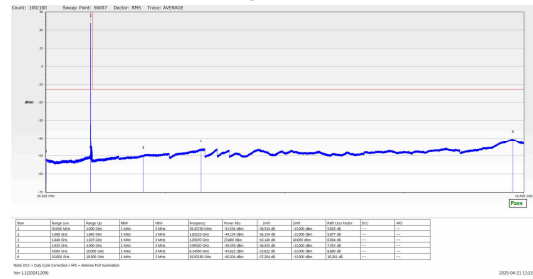


2025-04-23 11:52

N25(30M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

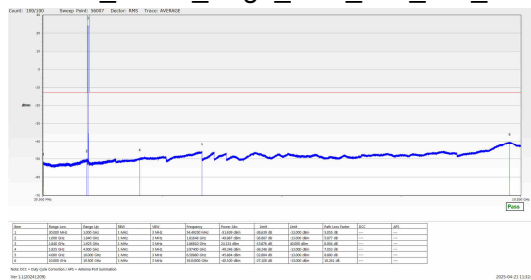

2025-04-23 11:32:2


N25(30M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

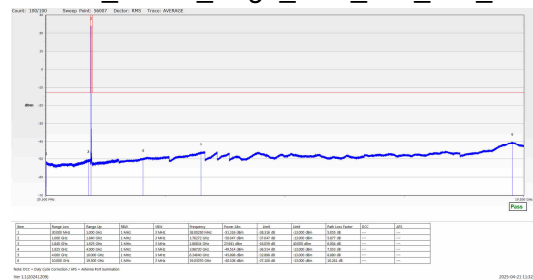

2025-04-23 11:32




N25(30M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

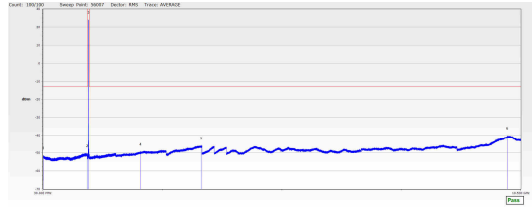[illegible]

NSA DEC • Daily Cycle Correction (DCC) • Address Not Illuminated
Ver 1.1(2024L200)

2025-04-23 11:32:40

N25(30M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

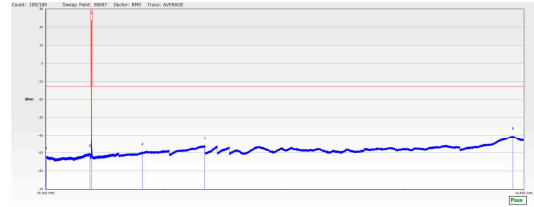[illegible]

NOTE: DCE = Duty Cycle Correction; WPS = Address Port Expansion
Ver 1.1(2024.1.20)

2025-04-23 11:52



Conducted Band Edge


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
25	15	5	370500	1852.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	5	370500	1852.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
25	15	20	372000	1860.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	20	372000	1860.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	20	372000	1860.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
25	15	20	372000	1860.0	DFT-s-OFDM QPSK	100@0	see graph	PASS
25	15	20	381000	1905.0	DFT-s-OFDM BPSK	1@105	see graph	PASS
25	15	20	381000	1905.0	DFT-s-OFDM QPSK	1@105	see graph	PASS
25	15	20	381000	1905.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
25	15	20	381000	1905.0	DFT-s-OFDM QPSK	100@0	see graph	PASS
25	15	30	373000	1865.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	30	373000	1865.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	30	373000	1865.0	DFT-s-OFDM BPSK	160@0	see graph	PASS
25	15	30	373000	1865.0	DFT-s-OFDM QPSK	160@0	see graph	PASS




25	15	30	380000	1900.0	DFT-s-OFDM BPSK	1@159	see graph	PASS
25	15	30	380000	1900.0	DFT-s-OFDM QPSK	1@159	see graph	PASS
25	15	30	380000	1900.0	DFT-s-OFDM BPSK	160@0	see graph	PASS
25	15	30	380000	1900.0	DFT-s-OFDM QPSK	160@0	see graph	PASS




N25(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

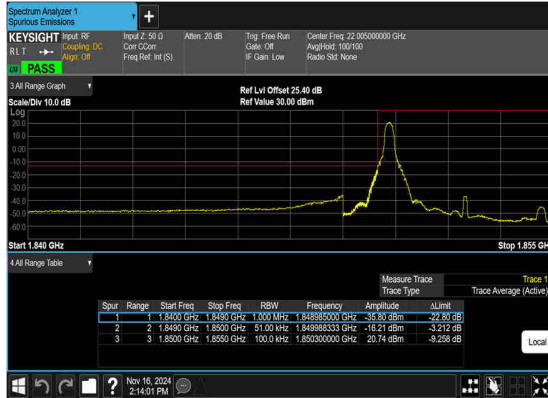


N25(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

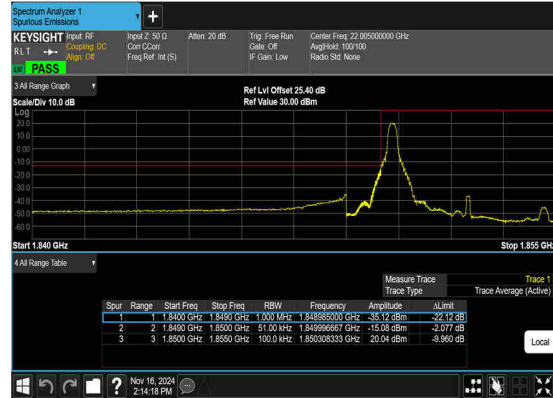

N25(5M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

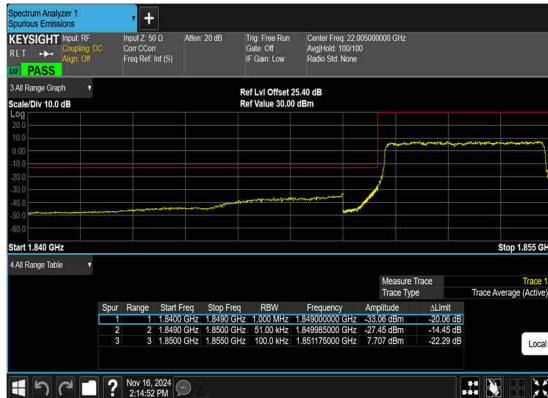


N25(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

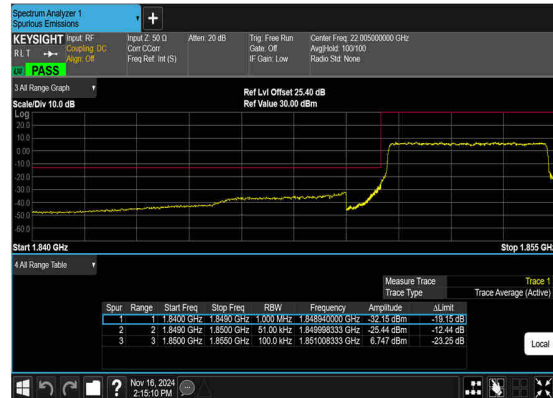





N25(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH

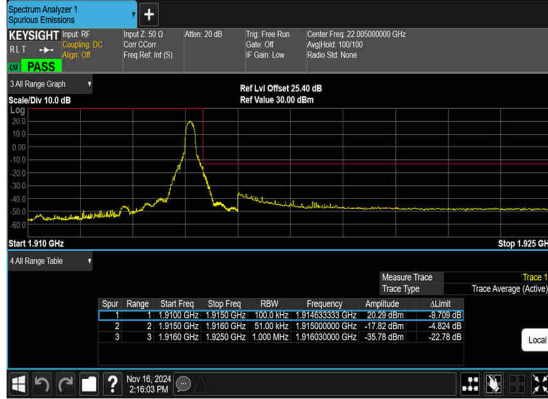


N25(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH



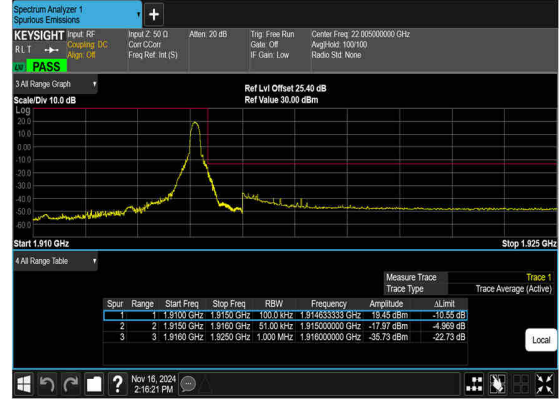





N25(5M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH

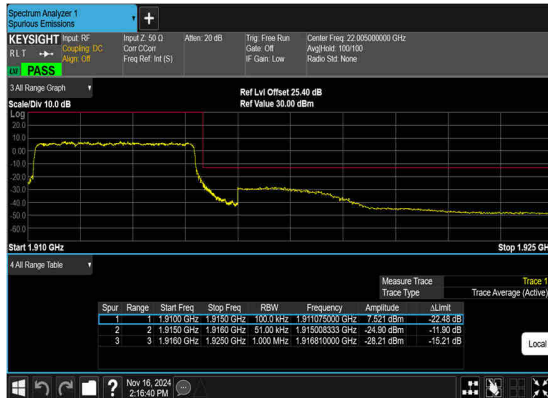

N25(5M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

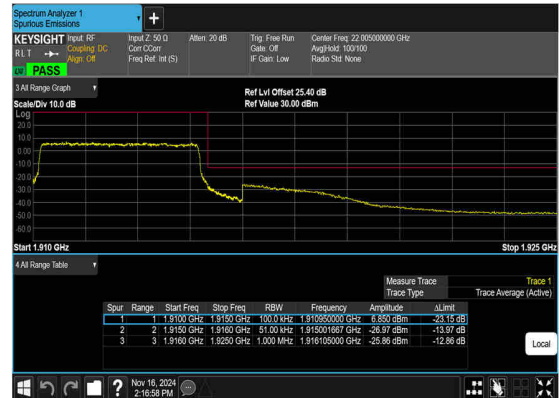

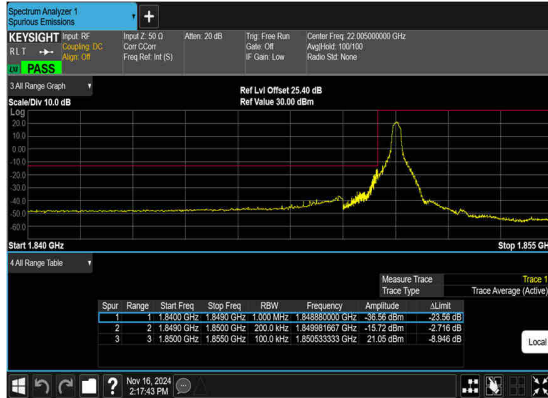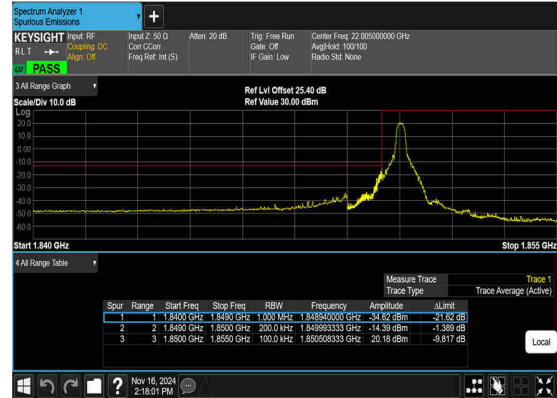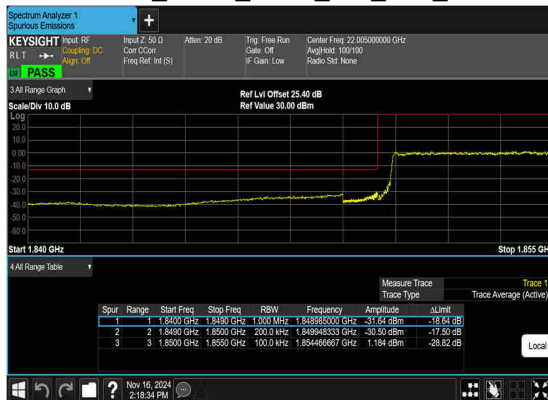N25(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CHN25(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CHN25(20M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CHN25(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

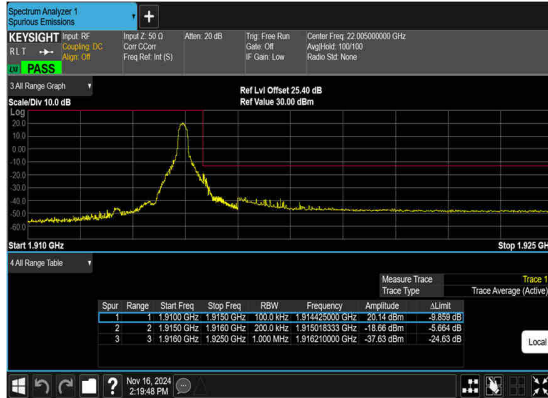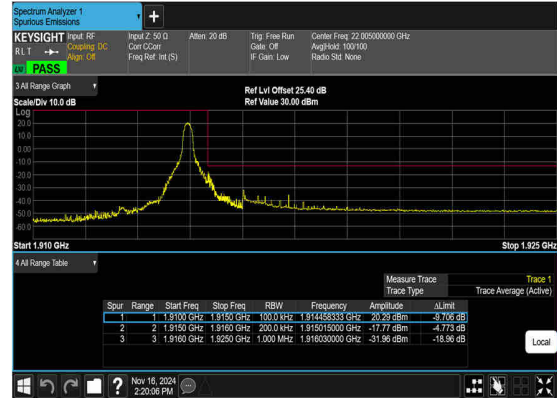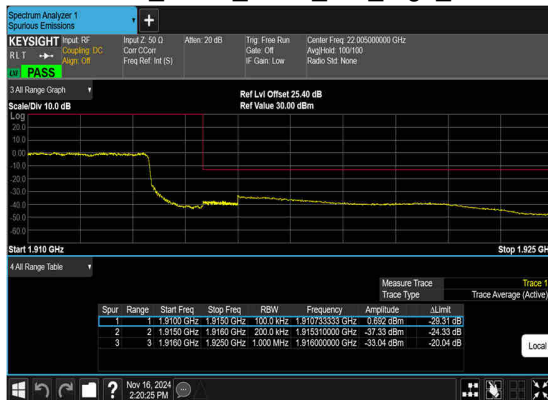N25(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CHN25(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CHN25(20M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CHN25(20M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH