

## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250500182005

Page: 1 of 290

**TEST REPORT**

**Application No.:** SZCR2505001820MO

**Applicant/ Manufacturer:** INGENICO

**Address of Applicant/ Manufacturer:** 9 Avenue de la gare - Rovaltain TGV, BP25156, Valence Cedex 9 26958 France

**Factory:**

1. ZHANGZHOU WANLIDA TECHNOLOGY CO.,LTD.
2. Jabil Vietnam Co. Ltd.
3. Industria Eletroeletrônica do Brasil LTDA.
4. Cal-Comp Electronics (Thailand) Public Co., Ltd.

**Address of Factory:**

1. Wanlida Industrial Zone, Jingcheng Town, Nanjing, Zhangzhou, Fujian, China
2. Lot I8-1, Saigon High Tech Park, Long Thanh My Ward, Thu Duc City, Ho Chi Minh City, Vietnam
3. Rodovia Fernão Dias (BR 381) KM 433 S/N. Jardim das Alterosas –1º Seção Betim – Minas Gerais – CEP: 32670-790 Brazil.
4. 60 Moo 8, Sethakij Rd., Klong Maduea, 74110, Kratoom Bean, Samutsakorn Thailand

**Equipment Under Test (EUT):**

**EUT Name:** Smart Module

**Model No.:** ING-A01-1-WU

**Trade Mark:** ingenico

**FCC ID:** XKB-INGA01WU

**Standard(s) :** 47 CFR Part 15, Subpart E 15.407


**Date of Receipt:** 2025-05-09

**Date of Test:** 2025-05-13 to 2025-06-06

**Date of Issue:** 2025-06-23

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.

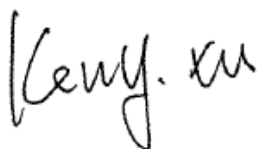

Keny Xu  
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250500182005

Page: 2 of 290

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2025-06-23		Original

Authorized for issue by:				
		Calvin Weng		
		Calvin Weng/Project Engineer		
		Eric Fu		
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart E 15.407 (c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)	Pass
Maximum Conducted output power		ANSI C63.10 (2013) Section 12.3	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Radiated Emissions (Below 1GHz)		ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Channel Move Time		KDB 905462 D02 V02 Section 7.8.3	KDB 905462 D02 V02 Section 5.1	Pass
Duty Cycle		ANSI C63.10 (2013) Section 12.2	ANSI C63.10 (2013) Section 12.2	Pass
99% Bandwidth		ANSI C63.10 (2013) Section 12.4.2	ANSI C63.10 (2013) Section 12.4.2	Pass
26dB Emission bandwidth		ANSI C63.10 (2013) Section 12.4.1	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band )		ANSI C63.10 (2013) Section 6.9.2	47 CFR Part 15, Subpart E 15.407 (e)	Pass
Peak Power spectrum density		ANSI C63.10 (2013) Section 12.5	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Frequency Stability		ANSI C63.10 (2013) Section 6.8	47 CFR Part 15, Subpart E 15.407 (g)	Pass
Channel Closing Transmission Time		KDB 905462 D02 V02 Section 7.8.3	KDB 905462 D02 V02 Section 5.1	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

### 3 Contents

	Page
1 Cover Page .....	1
2 Test Summary .....	3
3 Contents .....	4
4 General Information .....	7
4.1 Details of E.U.T. ....	7
4.2 Description of Support Units .....	7
4.3 Measurement Uncertainty .....	7
4.4 Test Location .....	9
4.5 Test Facility .....	9
4.6 Deviation from Standards .....	9
4.7 Abnormalities from Standard Conditions .....	9
5 Equipment List .....	10
6 Radio Spectrum Technical Requirement .....	13
6.1 Antenna Requirement .....	13
6.1.1 Test Requirement: .....	13
6.1.2 Conclusion .....	13
6.2 Transmission in the Absence of Data .....	14
6.2.1 Test Requirement: .....	14
6.2.2 Conclusion .....	14
7 Radio Spectrum Matter Test Results .....	15
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz) .....	15
7.1.1 E.U.T. Operation .....	15
7.1.2 Test Mode Description .....	15
7.1.3 Test Setup Diagram .....	16
7.1.4 Measurement Procedure and Data .....	16
7.2 Maximum Conducted output power .....	19
7.2.1 E.U.T. Operation .....	19
7.2.2 Test Mode Description .....	19
7.2.3 Test Setup Diagram .....	20
7.2.4 Measurement Procedure and Data .....	20
7.3 Radiated Emissions (Below 1GHz) .....	21
7.3.1 E.U.T. Operation .....	21
7.3.2 Test Mode Description .....	21
7.3.3 Test Setup Diagram .....	22
7.3.4 Measurement Procedure and Data .....	23
7.4 Radiated Emissions (Above 1GHz) .....	26
7.4.1 E.U.T. Operation .....	27
7.4.2 Test Mode Description .....	27
7.4.3 Test Setup Diagram .....	27





## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250500182005

Page: 5 of 290

7.4.4	Measurement Procedure and Data.....	28
7.5	Radiated Emissions which fall in the restricted bands .....	53
7.5.1	E.U.T. Operation .....	54
7.5.2	Test Mode Description .....	54
7.5.3	Test Setup Diagram .....	54
7.5.4	Measurement Procedure and Data.....	55
7.6	Channel Move Time .....	126
7.6.1	E.U.T. Operation .....	126
7.6.2	Test Mode Description .....	127
7.6.3	Test Setup Diagram .....	127
7.6.4	Measurement Procedure and Data.....	128
7.7	Duty Cycle .....	129
7.7.1	E.U.T. Operation .....	129
7.7.2	Test Mode Description .....	129
7.7.3	Test Setup Diagram .....	129
7.7.4	Measurement Procedure and Data.....	129
7.8	99% Bandwidth .....	130
7.8.1	E.U.T. Operation .....	130
7.8.2	Test Mode Description .....	130
7.8.3	Test Setup Diagram .....	130
7.8.4	Measurement Procedure and Data.....	130
7.9	26dB Emission bandwidth .....	131
7.9.1	E.U.T. Operation .....	131
7.9.2	Test Mode Description .....	131
7.9.3	Test Setup Diagram .....	131
7.9.4	Measurement Procedure and Data.....	131
7.10	Minimum 6 dB bandwidth (5.725-5.85 GHz band ) .....	132
7.10.1	E.U.T. Operation.....	132
7.10.2	Test Mode Description.....	132
7.10.3	Test Setup Diagram.....	132
7.10.4	Measurement Procedure and Data .....	132
7.11	Peak Power spectrum density.....	133
7.11.1	E.U.T. Operation.....	133
7.11.2	Test Mode Description.....	133
7.11.3	Test Setup Diagram.....	134
7.11.4	Measurement Procedure and Data .....	134
7.12	Frequency Stability .....	135
7.12.1	E.U.T. Operation.....	135
7.12.2	Test Mode Description.....	135
7.12.3	Test Setup Diagram.....	135
7.12.4	Measurement Procedure and Data .....	135
7.13	Channel Closing Transmission Time .....	136
7.13.1	E.U.T. Operation.....	136
7.13.2	Test Mode Description.....	137
7.13.3	Test Setup Diagram.....	137
7.13.4	Measurement Procedure and Data .....	138
8	Test Setup Photo .....	139
9	EUT Constructional Details (EUT Photos) .....	139



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) EMC Laboratory.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250500182005

Page: 6 of 290

10	Appendix.....	140
----	---------------	-----



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	DC3.9V
Cable Loss (for RF conducted test):	1.5dB
Operation Frequency/Number of channels (20MHz):	U-NII-1: 5180-5240MHz (4 Channels) U-NII-2A: 5260-5320MHz (4 Channels) U-NII-2C: 5500-5700MHz (11 Channels) U-NII-3: 5745-5825MHz (5 Channels)
Operation Frequency/Number of channels/(40MHz):	U-NII-1:5190-5230MHz (2 Channels) U-NII-2A: 5270-5310MHz (2 Channels) U-NII-2C: 5510-5670MHz (5 Channels) U-NII-3: 5755-5795MHz (2 Channels)
Operation Frequency/Number of channels (80MHz):	U-NII-1:5210MHz (1 Channel) U-NII-2A: 5290MHz (1 Channels) U-NII-2C: 5530-5610MHz (2 Channels) U-NII-3: 5775MHz (1 Channel)
Modulation Type:	802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Spacing:	802.11a/n/ac 20: 20MHz; 802.11n/ac 40: 40MHz; 802.11ac 80: 80MHz
DFS Function:	Slave without Radar detection
TPC Function:	Without TPC function
Antenna Type:	Dipole Antenna
Antenna Gain:	U-NII-1/2A:0dBi, U-NII-2C:0.49dBi, U-NII-3:0.3dBi

Remark:The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Adapter	LITEON	PA-1041-81	/
Debug board	ingenico	ING-A01 Demo	/

### 4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	± 3.1dB
Maximum Conducted output power	± 0.75dB
Radiated Emissions (Below 1GHz)	± 6.0dB for 3m; ± 5.0dB for 10m



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250500182005

Page: 8 of 290

Radiated Emissions (Above 1GHz)	$\pm 4.6\text{dB}$ (1-18GHz); $\pm 4.8\text{dB}$ (18-40GHz)
Radiated Emissions which fall in the restricted bands	$\pm 6.0\text{dB}$ (below 1GHz); $\pm 4.6\text{dB}$ (above 1GHz);
Duty Cycle	$\pm 0.37\%$
99% Bandwidth	$\pm 3\%$
26dB Emission bandwidth	$\pm 3\%$
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	$\pm 3\%$
Peak Power spectrum density	$\pm 2.84\text{dB}$
Frequency Stability	$\pm 7.25 \times 10^{-8}$

## Remark:

The  $U_{\text{lab}}$  (lab Uncertainty) is less than  $U_{\text{CISPR/ETSI}}$  (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250500182005

Page: 9 of 290

### 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### • VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

#### • FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

#### • Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

### 4.6 Deviation from Standards

None

### 4.7 Abnormalities from Standard Conditions

None



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2025-05-07	2028-05-06
EMI Test Receiver	Rohde&Schwarz	ESR	SZ-WRG-M-047	2025-01-08	2026-01-07
Matching Pad	N/A	N/A	SEM021-23	2025-03-19	2026-03-18
Matching Pad	N/A	N/A	SEM021-24	2025-03-19	2026-03-18
Measurement Software	AUDIX	e3 V8.2014-6-27a	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2024-07-06	2025-07-05
LISN	Rohde&Schwarz	ENV216	SEM007-01	2024-08-15	2025-08-14
LISN	ETS-LINDGREN	3816/2	SEM007-02	2025-03-03	2026-03-02

Radiated Emissions (Below 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2023-11-20	2025-11-19
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2024-08-14	2025-08-13
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2023-09-16	2025-09-15
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2025-03-04	2026-03-03
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2024-07-06	2025-07-05

Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-01-07	2026-01-06
Low Noise Amplifier 1G-18GHz	Tonscend	TAP01018050	SZ-WRG-M-051	2025-01-07	2026-01-06
Low Noise Amplifier 18G-40GHz	Tonscend	TAP18040048	SZ-WRG-M-052	2025-01-08	2026-01-07
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 93.9 D	SZ-WRG-M-055	2023-12-21	2025-12-20
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2023-12-25	2025-12-24
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-	2025-01-06	2028-01-05



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250500182005

Page: 11 of 290

			063		
Humidity and Temperature Indicator	deli	8838	SEM002-46	2024-07-24	2025-07-23

## Radiated Emissions which fall in the restricted bands

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-01-07	2026-01-06
Low Noise Amplifier 30M-8GHz	Tonscend	TAP30M8G30	SZ-WRG-M-050	2025-01-07	2026-01-06
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 93.9 D	SZ-WRG-M-055	2023-12-21	2025-12-20
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2023-12-25	2025-12-24
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2024-07-24	2025-07-23

## Channel Move Time

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Manual Step Attenuator	KEYSIGHT	8494B	SEM021-05	2025-03-03	2026-03-02
Manual Step Attenuator	KEYSIGHT	8496B	SEM021-06	2025-03-03	2026-03-02
Measurement Software	KEYSIGHT	Signal Studio for DFS Radar Profiles V2.2.0.0	N/A	N/A	N/A
Measurement Software	Agilent	ISMonitor10	N/A	N/A	N/A
MXG Vector Signal Generator	Agilent	N5182A	SEM006-21	2025-03-03	2026-03-02
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-22	2025-03-04	2026-03-03

## RF Conducted Test

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2024-08-14	2025-08-13
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2025-03-04	2026-03-03
MXA Signal Analyzer	KEYSIGHT	N9010B	SEM004-27	2024-09-14	2025-09-13
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2024-09-14	2025-09-13
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2024-07-06	2025-07-05



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (Shenzhen) EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250500182005

Page: 12 of 290

Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2025-03-03	2026-03-02
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2025-02-26	2026-02-25
Manual Step Attenuator	KEYSIGHT	8494B	SEM021-05	2025-03-03	2026-03-02
Manual Step Attenuator	KEYSIGHT	8496B	SEM021-06	2025-03-03	2026-03-02
MXG Vector Signal Generator	Agilent	N5182A	SEM006-21	2025-03-03	2026-03-02
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-22	2025-03-04	2026-03-03

## General used equipment

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2024-07-24	2025-07-23
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2024-07-24	2025-07-23
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2025-03-03	2026-03-02



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

#### 6.1.2 Conclusion

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is RP-SMA antenna and no consideration of replacement. The best case gain of the antenna are U-NII-1/2A:0dBi, U-NII-2C:0.49dBi, U-NII-3:0.3dBi.

Antenna location: Refer to external photos



## 6.2 Transmission in the Absence of Data

### 6.2.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (c)

### 6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.



## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C

Humidity: 44.5 % RH


Atmospheric Pressure: 3.50 mbar

#### 7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



### 7.1.3 Test Setup Diagram

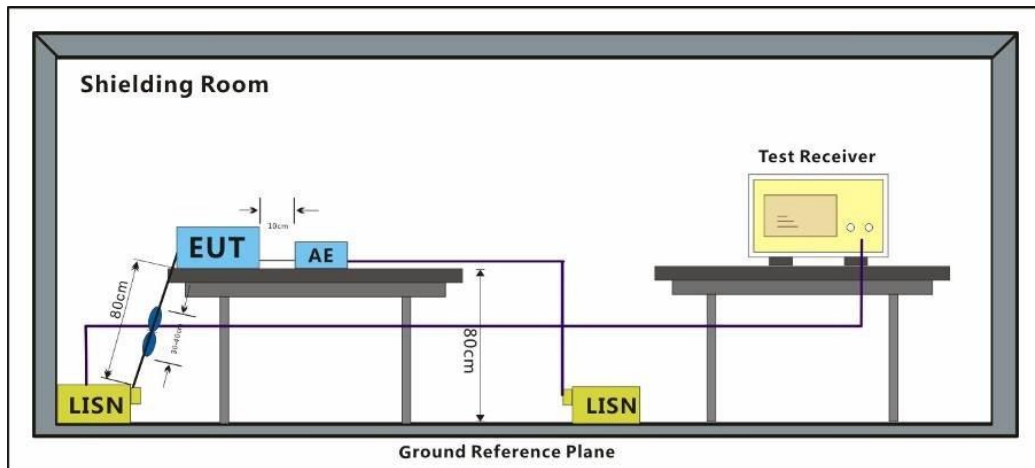

### 7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark 1: Level=Read Level+ Cable Loss+ LISN Factor

Remark 2: Pre-test AC 3.9V/50-60Hz&AC 240V/50-60Hz then choose the AC 3.9/60Hz as worst case.





Test Mode: 05; Line: Live line

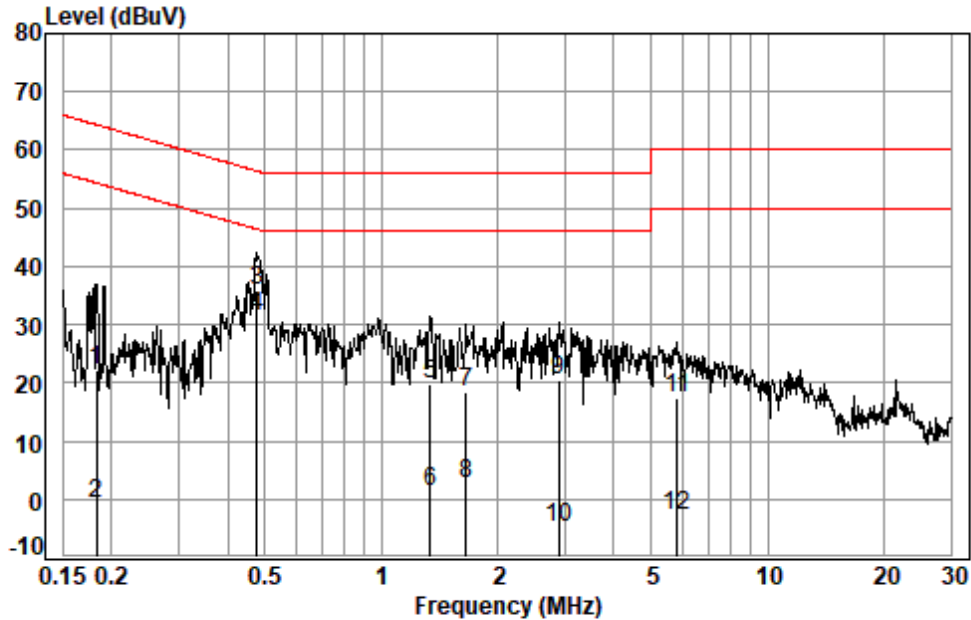


Site : Shielding Room  
Condition: Line  
Job No. : 01820MO  
Test mode: 05

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1835	0.06	10.14	11.98	22.18	64.33	-42.15	QP
2	0.1835	0.06	10.14	-11.09	-0.89	54.33	-55.22	Average
3 *	0.4761	0.08	9.57	26.19	35.84	56.41	-20.57	QP
4 *	0.4761	0.08	9.57	21.69	31.34	46.41	-15.07	Average
5	1.3379	0.10	9.58	10.11	19.79	56.00	-36.21	QP
6	1.3379	0.10	9.58	-8.50	1.18	46.00	-44.82	Average
7	1.6625	0.10	9.58	8.88	18.56	56.00	-37.44	QP
8	1.6625	0.10	9.58	-7.08	2.60	46.00	-43.40	Average
9	2.8845	0.11	9.64	10.70	20.45	56.00	-35.55	QP
10	2.8845	0.11	9.64	-14.46	-4.71	46.00	-50.71	Average
11	5.8358	0.14	9.67	7.74	17.55	60.00	-42.45	QP
12	5.8358	0.14	9.67	-12.51	-2.70	50.00	-52.70	Average



Test Mode: 05; Line: Neutral Line

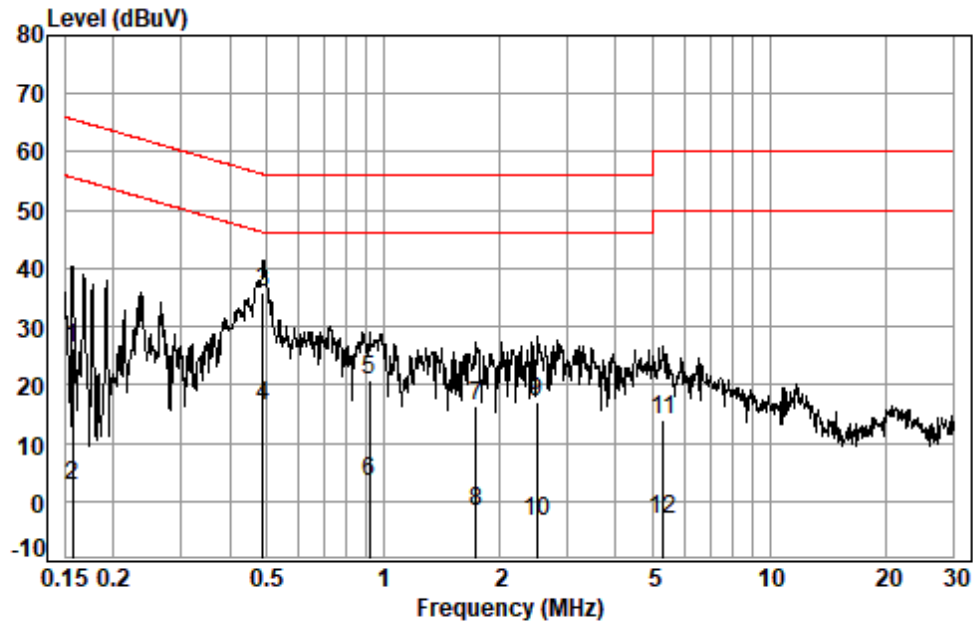

Site : Shielding Room  
Condition: Neutral  
Job No. : 01820MO  
Test mode: 05

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1573	0.06	10.14	16.13	26.33	65.60	-39.27	QP
2	0.1573	0.06	10.14	-7.64	2.56	55.60	-53.04	Average
3 *	0.4889	0.08	9.71	26.14	35.93	56.19	-20.26	QP
4 *	0.4889	0.08	9.71	6.60	16.39	46.19	-29.80	Average
5	0.9233	0.09	9.56	11.12	20.77	56.00	-35.23	QP
6	0.9233	0.09	9.56	-6.30	3.35	46.00	-42.65	Average
7	1.7437	0.10	9.55	6.74	16.39	56.00	-39.61	QP
8	1.7437	0.10	9.55	-11.47	-1.82	46.00	-47.82	Average
9	2.5000	0.11	9.54	7.45	17.10	56.00	-38.90	QP
10	2.5000	0.11	9.54	-13.28	-3.63	46.00	-49.63	Average
11	5.3050	0.13	9.58	4.29	14.00	60.00	-46.00	QP
12	5.3050	0.13	9.58	-12.98	-3.27	50.00	-53.27	Average



## 7.2 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2013) Section 12.3

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) or 11dBm+10logB*
5470-5725	≤250mW(24dBm) or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	<p>* Where B is the 26dB emission bandwidth in MHz.</p> <p>The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.</p>

### 7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 20.0 °C Humidity: 42.2 % RH Atmospheric Pressure: 3.50 mbar

### 7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



### 7.2.3 Test Setup Diagram

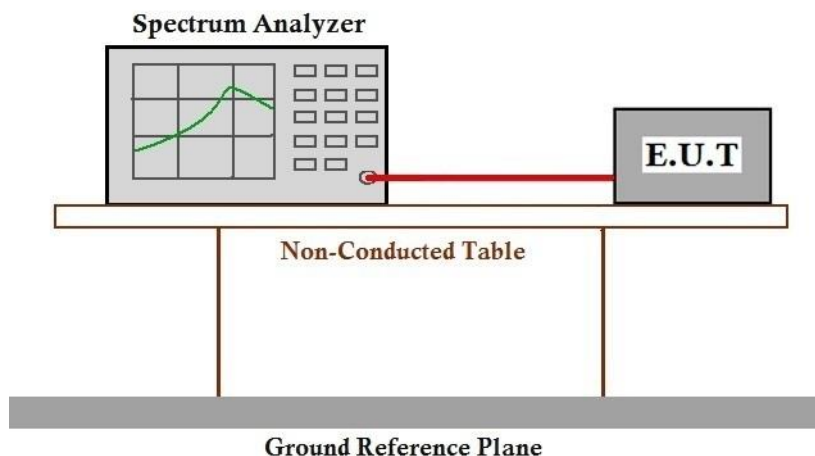

### 7.2.4 Measurement Procedure and Data

$$\text{AV Output power Level} = \text{Reading level} + \text{Cable loss} + \text{DCCF}$$

Please Refer to Appendix for Details



## 7.3 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 46.8 % RH


Atmospheric Pressure: 3.50 mbar

### 7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Pre-scan	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



### 7.3.3 Test Setup Diagram

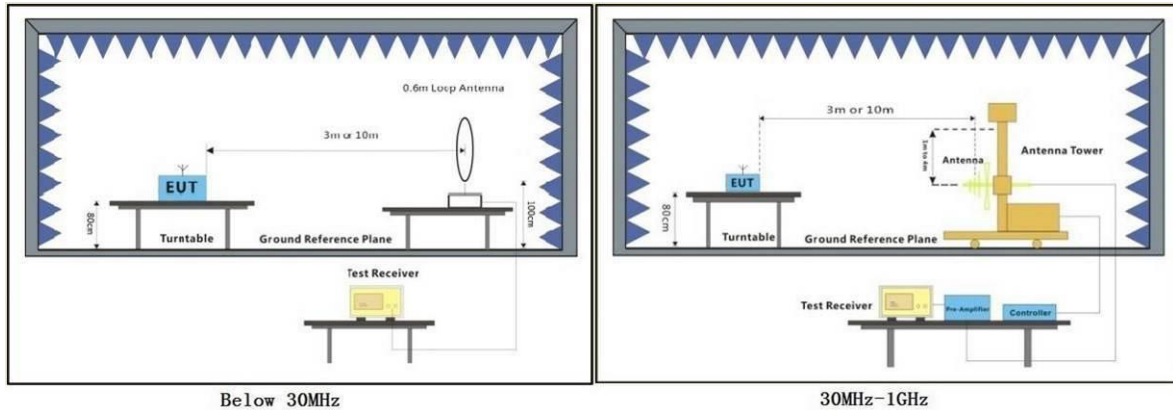

## 7.3.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

### Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



Test Mode: 05; Polarity: Horizontal

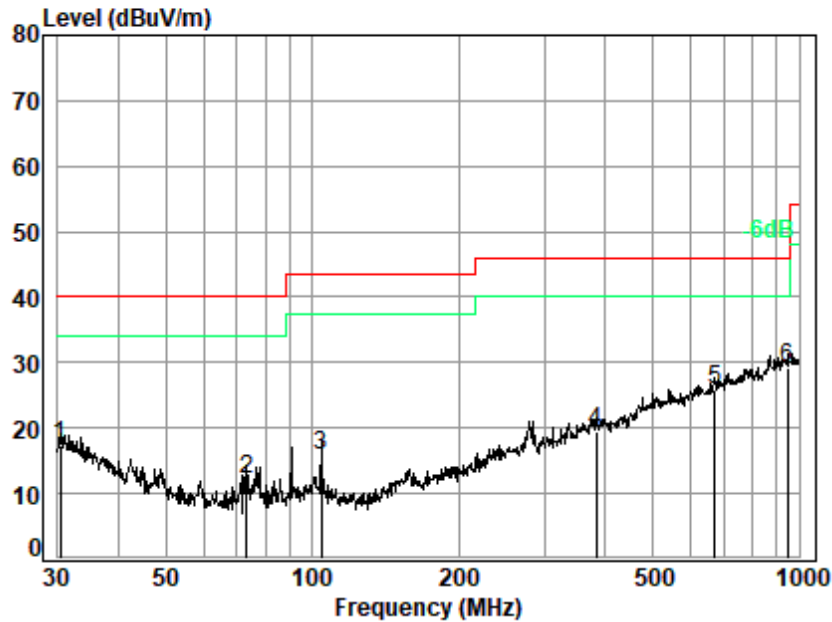


Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : 01820MO  
Test Mode: 05

	Ant	Cable	Preamp	Read		Limit	Over	
Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	30.317	21.05	0.67	27.79	23.31	17.24	40.00	-22.76 QP
2	73.359	10.42	1.04	27.67	28.49	12.28	40.00	-27.72 QP
3	104.170	12.22	1.25	27.57	30.04	15.94	43.50	-27.56 QP
4	383.932	20.90	2.53	27.09	23.13	19.47	46.00	-26.53 QP
5	670.489	25.57	3.46	27.80	24.59	25.82	46.00	-20.18 QP
6 q	948.761	28.23	4.25	26.42	23.21	29.27	46.00	-16.73 QP





Test Mode: 05; Polarity: Vertical

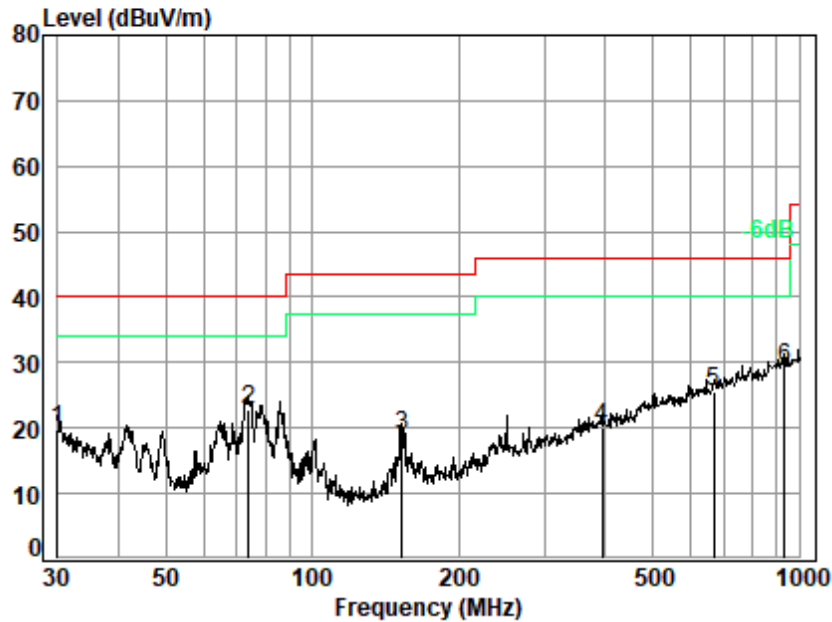

Site : chamber  
Condition: 3m VERTICAL  
Job No. : 01820MO  
Test Mode: 05

	Ant Freq	Cable Factor	Preamp Loss	Read Factor	Level	Limit	Over	
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.000	21.20	0.67	27.79	25.80	19.88	40.00	-20.12 QP
2	73.876	10.39	1.05	27.67	39.11	22.88	40.00	-17.12 QP
3	153.200	13.39	1.55	27.37	31.15	18.72	43.50	-24.78 QP
4	393.472	20.72	2.56	27.13	24.01	20.16	46.00	-25.84 QP
5	668.142	25.49	3.45	27.80	24.34	25.48	46.00	-20.52 QP
6 q	935.546	28.18	4.22	26.51	23.43	29.32	46.00	-16.68 QP



## 7.4 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

\*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23.0 °C


Humidity: 53.1 % RH

Atmospheric Pressure: 3.50 mbar

### 7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

### 7.4.3 Test Setup Diagram

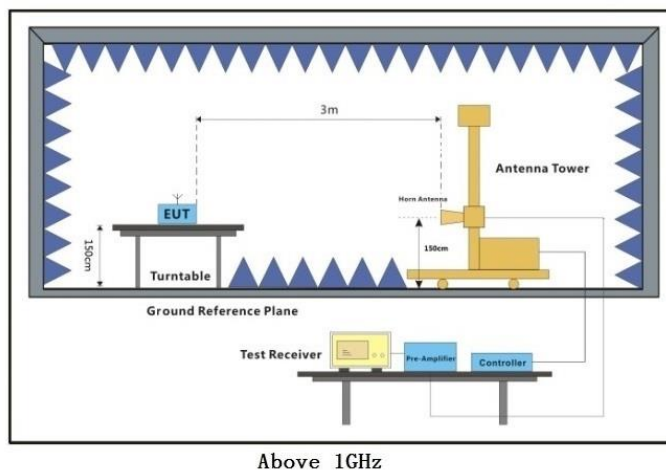

## 7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.


Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
7. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.





Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

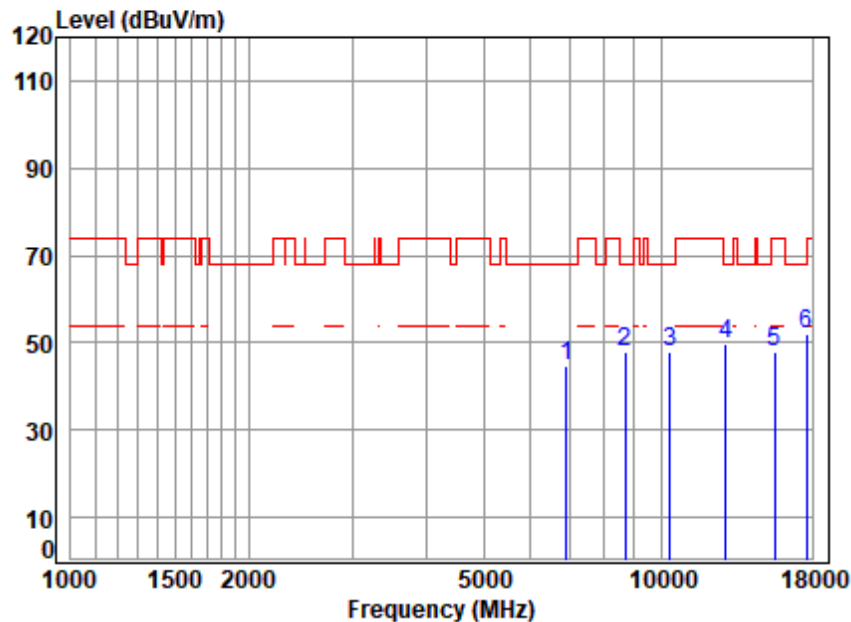

Condition: 3m HORIZONTAL

Job No : 01820MO

Mode : 5180 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6894.806	11.37	36.18	56.72	53.78	44.61	68.20	-23.59 Peak
2	8688.480	12.08	38.55	55.28	52.39	47.74	68.20	-20.46 Peak
3	10360.000	13.60	39.00	53.88	49.38	48.10	68.20	-20.10 peak
4	12872.440	15.70	40.37	54.41	48.28	49.94	68.20	-18.26 Peak
5	15540.000	17.00	38.56	54.14	46.49	47.91	74.00	-26.09 peak
6	pp17639.470	19.52	40.89	54.43	45.98	51.96	68.20	-16.24 Peak




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250500182005

Page: 30 of 290

Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

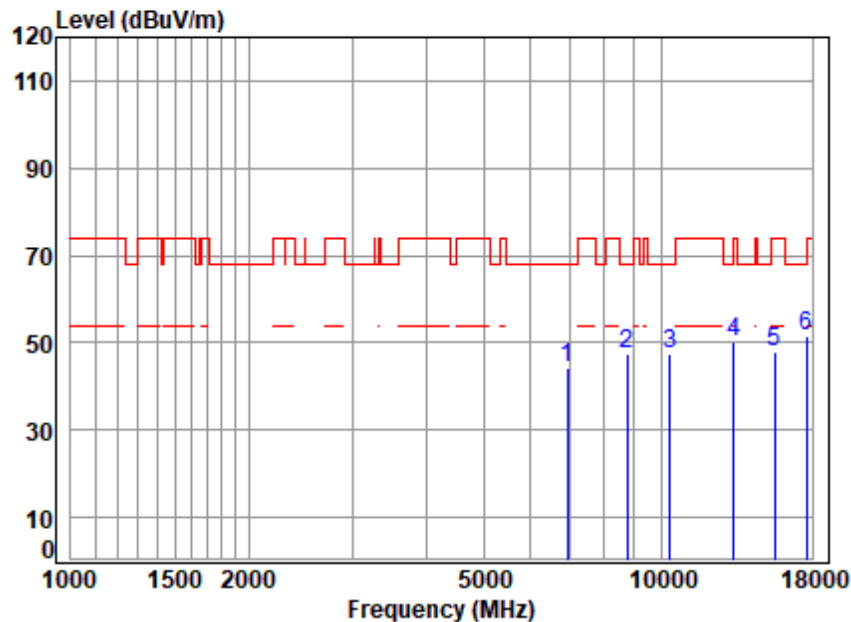

Condition: 3m VERTICAL

Job No : 01820MO

Mode : 5180 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6934.778	11.37	36.13	56.71	53.24	44.03	68.20	-24.17 Peak
2	8764.146	12.19	38.50	55.21	51.93	47.41	68.20	-20.79 Peak
3	10360.000	13.60	39.00	53.88	48.56	47.28	68.20	-20.92 peak
4	13249.930	16.10	40.25	54.48	48.52	50.39	68.20	-17.81 Peak
5	15540.000	17.00	38.56	54.14	46.69	48.11	74.00	-25.89 peak
6	pp17639.470	19.52	40.89	54.43	45.69	51.67	68.20	-16.53 Peak




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

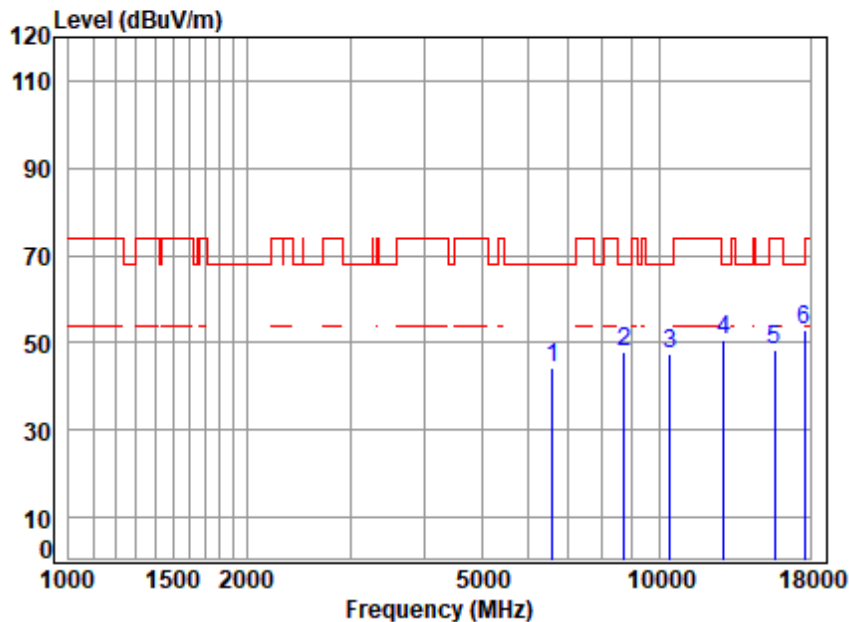

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5220 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6602.265	11.60	35.21	56.78	54.22	44.25	68.20	-23.95 peak
2	8713.630	12.11	38.57	55.26	52.69	48.11	68.20	-20.09 Peak
3	10440.000	13.63	39.04	53.84	48.67	47.50	68.20	-20.70 peak
4	12835.290	15.55	40.34	54.38	48.94	50.45	68.20	-17.75 peak
5	15660.000	17.23	38.56	54.10	46.70	48.39	74.00	-25.61 peak
6	pp17639.470	19.52	40.89	54.43	47.00	52.98	68.20	-15.22 peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

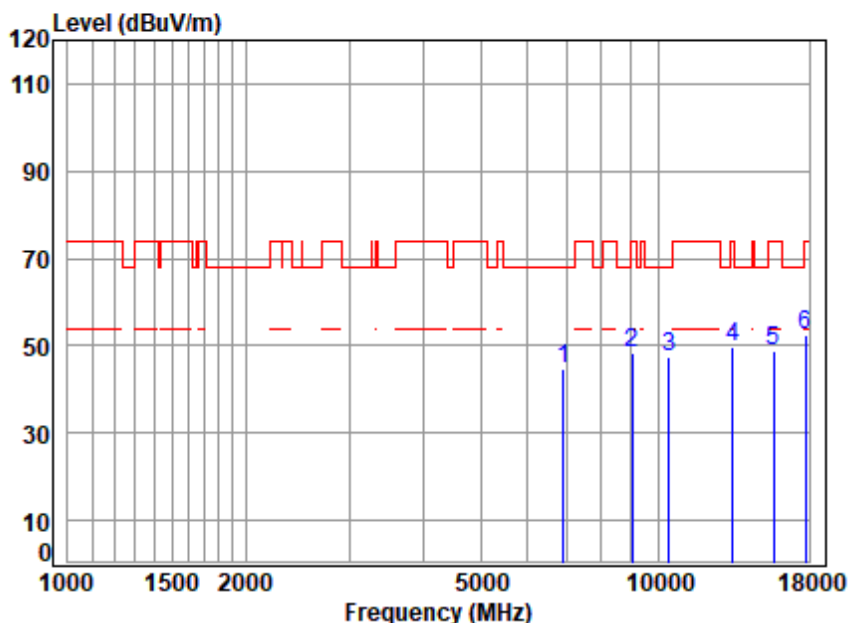

Condition: 3m VERTICAL

Job No : 01820MO

Mode : 5220 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6894.806	11.37	36.18	56.72	53.68	44.51	68.20	-23.69 peak
2	9021.160	12.14	38.60	54.98	52.46	48.22	74.00	-25.78 Peak
3	pp10440.000	13.63	39.04	53.84	48.74	47.57	68.20	-20.63 peak
4	13365.320	16.13	40.30	54.46	47.88	49.85	74.00	-24.15 Peak
5	15660.000	17.23	38.56	54.10	47.00	48.69	74.00	-25.31 peak
6	17741.740	18.87	42.09	54.45	45.86	52.37	74.00	-21.63 peak






## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250500182005

Page: 33 of 290

Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

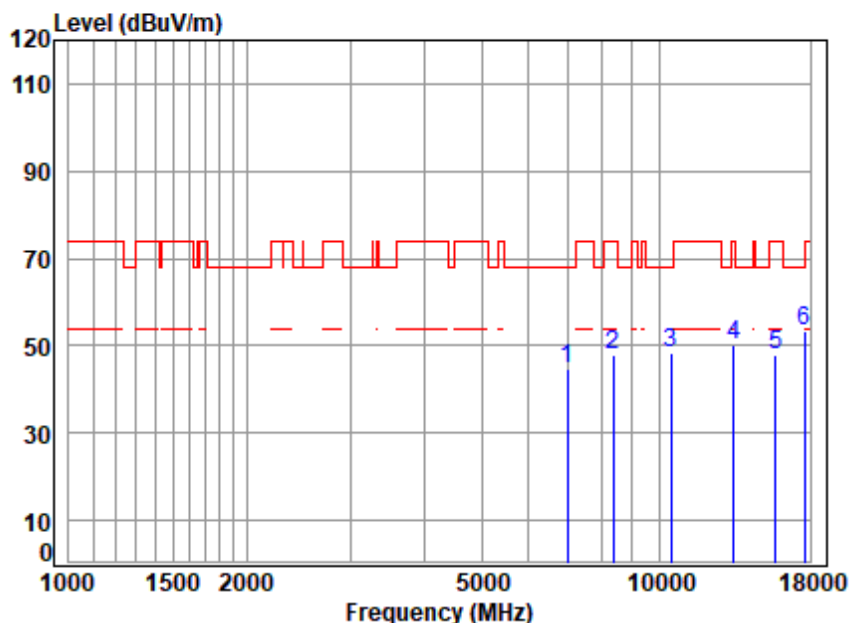

Condition: 3m HORIZONTAL

Job No : 01820MO

Mode : 5240 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6995.172	11.37	36.19	56.70	54.05	44.91	68.20	-23.29 peak
2	8368.069	11.67	38.66	55.57	53.03	47.79	74.00	-26.21 Peak
3	10480.000	13.64	39.08	53.81	49.28	48.19	68.20	-20.01 peak
4	13365.320	16.13	40.30	54.46	48.38	50.35	74.00	-23.65 peak
5	15720.000	17.22	38.58	54.08	46.31	48.03	74.00	-25.97 peak
6	pp17639.470	19.52	40.89	54.43	47.26	53.24	68.20	-14.96 peak




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

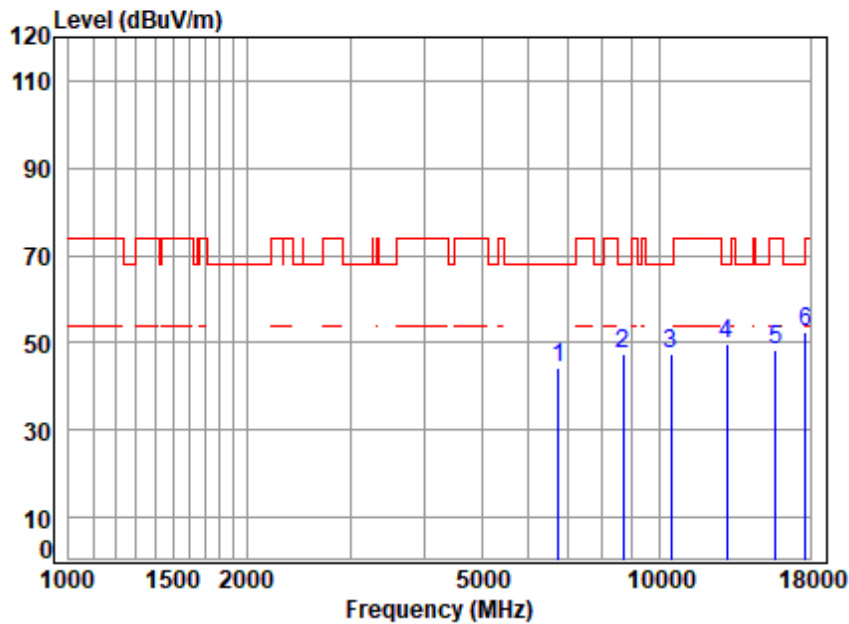

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5240 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	6756.708	11.39	35.73	56.75	53.89	44.26	68.20 -23.94 peak
2	8688.480	12.08	38.55	55.28	52.26	47.61	68.20 -20.59 Peak
3	10480.000	13.64	39.08	53.81	48.36	47.27	68.20 -20.93 peak
4	13022.130	15.82	40.30	54.50	48.17	49.79	68.20 -18.41 peak
5	15720.000	17.22	38.58	54.08	46.52	48.24	74.00 -25.76 peak
6	pp17690.530	19.16	41.66	54.44	46.21	52.59	68.20 -15.61 peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

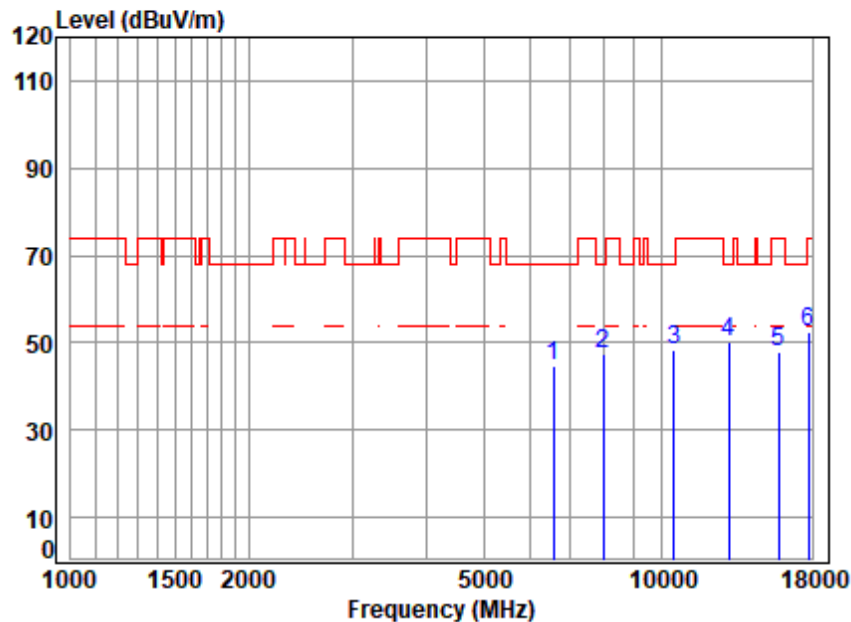

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5260 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6564.209	11.63	35.06	56.79	54.67	44.57	68.20	-23.63 peak
2	7989.893	11.56	37.78	55.91	54.18	47.61	68.20	-20.59 Peak
3	10520.000	13.63	39.14	53.79	49.39	48.37	68.20	-19.83 peak
4	pp12984.540	15.88	40.32	54.49	48.60	50.31	68.20	-17.89 peak
5	15780.000	17.08	38.52	54.07	46.46	47.99	74.00	-26.01 peak
6	17741.740	18.87	42.09	54.45	46.03	52.54	74.00	-21.46 peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

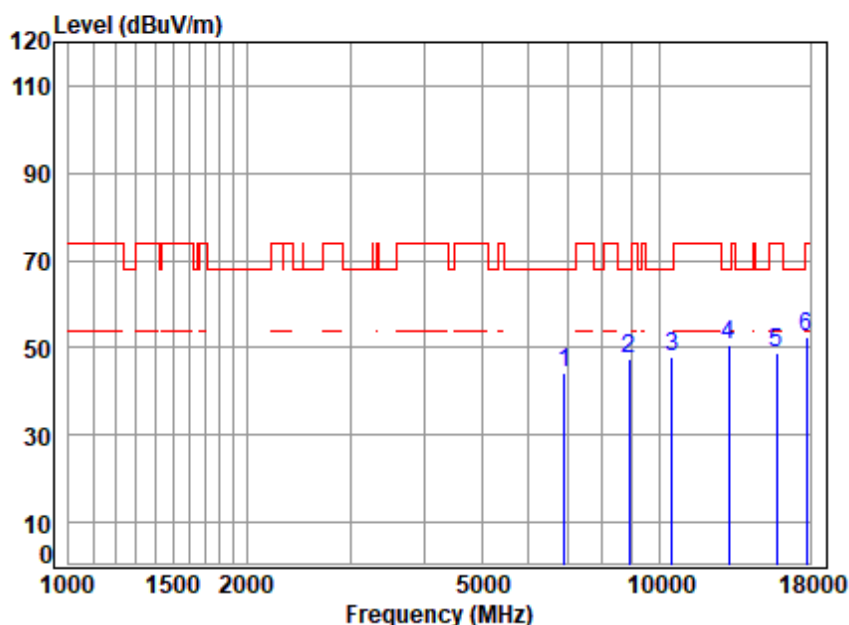

Condition: 3m VERTICAL

Job No : 01820MO

Mode : 5260 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6894.806	11.37	36.18	56.72	53.65	44.48	68.20	-23.72 peak
2	8891.725	12.22	38.58	55.10	51.76	47.46	68.20	-20.74 Peak
3	10520.000	13.63	39.14	53.79	48.77	47.75	68.20	-20.45 peak
4	pp13097.620	15.58	40.30	54.49	49.07	50.46	68.20	-17.74 peak
5	15780.000	17.08	38.52	54.07	47.26	48.79	74.00	-25.21 peak
6	17741.740	18.87	42.09	54.45	46.12	52.63	74.00	-21.37 peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)



Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

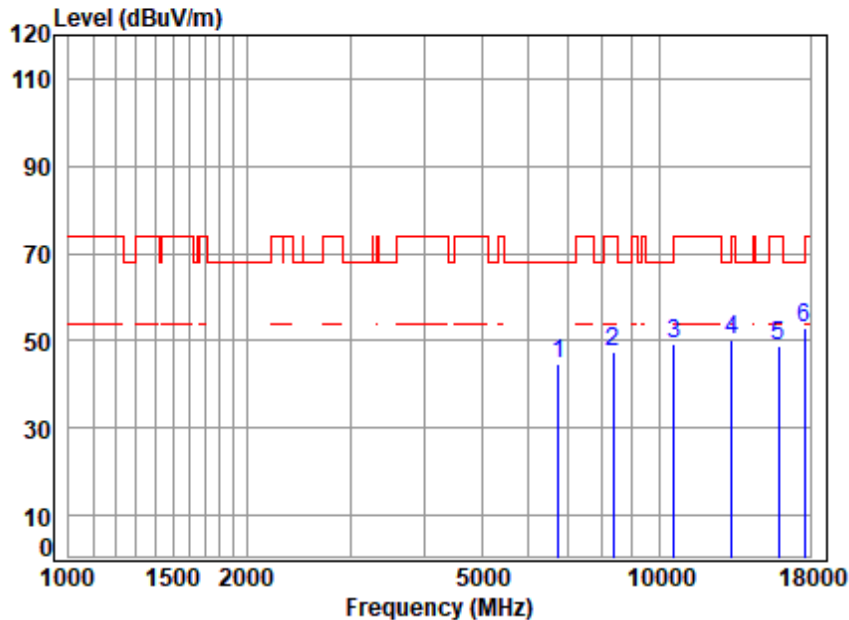

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5300 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6756.708	11.39	35.73	56.75	54.52	44.89	68.20	-23.31 peak
2	8368.069	11.67	38.66	55.57	52.85	47.61	74.00	-26.39 Peak
3	10600.000	13.59	39.30	53.74	49.92	49.07	68.20	-19.13 peak
4	13288.280	16.44	40.29	54.47	48.05	50.31	74.00	-23.69 peak
5	15900.000	17.28	38.70	54.03	46.79	48.74	74.00	-25.26 peak
6	pp17639.470	19.52	40.89	54.43	46.80	52.78	68.20	-15.42 peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

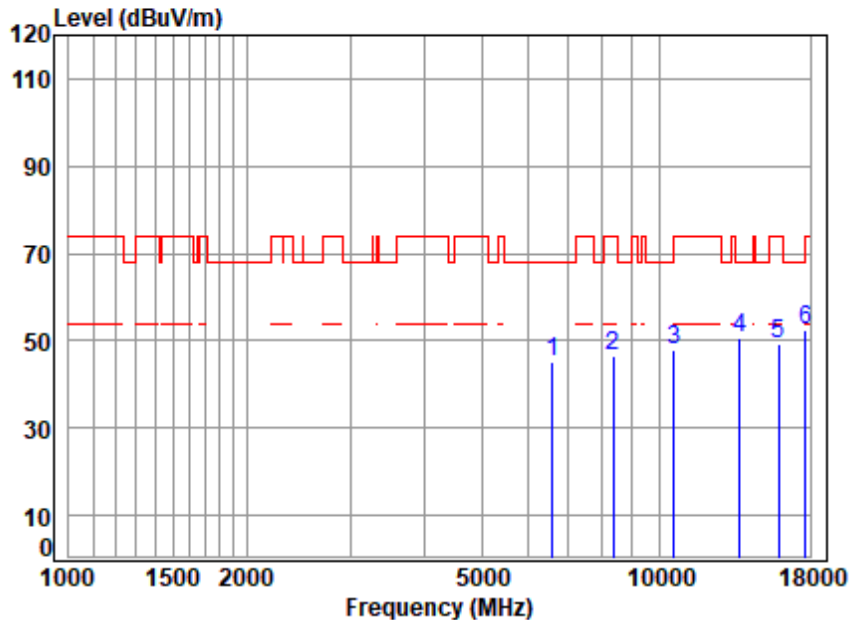

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5300 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6583.209	11.61	35.13	56.78	55.37	45.33	68.20	-22.87 peak
2	8343.918	11.70	38.60	55.59	51.83	46.54	74.00	-27.46 Peak
3	10600.000	13.59	39.30	53.74	48.78	47.93	68.20	-20.27 peak
4	13677.970	16.27	40.00	54.43	48.71	50.55	68.20	-17.65 peak
5	15900.000	17.28	38.70	54.03	47.45	49.40	74.00	-24.60 peak
6	pp17690.530	19.16	41.66	54.44	46.16	52.54	68.20	-15.66 peak



Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

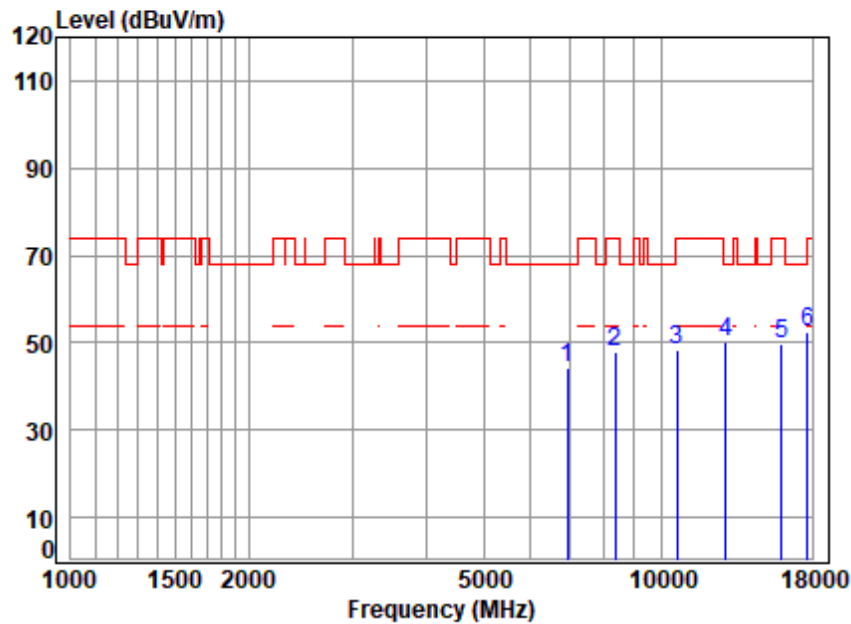

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5320 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6934.778	11.37	36.13	56.71	53.51	44.30	68.20	-23.90 peak
2	8368.069	11.67	38.66	55.57	52.95	47.71	74.00	-26.29 Peak
3	10640.000	13.77	39.34	53.72	48.87	48.26	74.00	-25.74 peak
4	12872.440	15.70	40.37	54.41	48.55	50.21	68.20	-17.99 peak
5	15960.000	17.20	38.64	54.01	47.68	49.51	74.00	-24.49 peak
6	pp17690.530	19.16	41.66	54.44	46.11	52.49	68.20	-15.71 peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

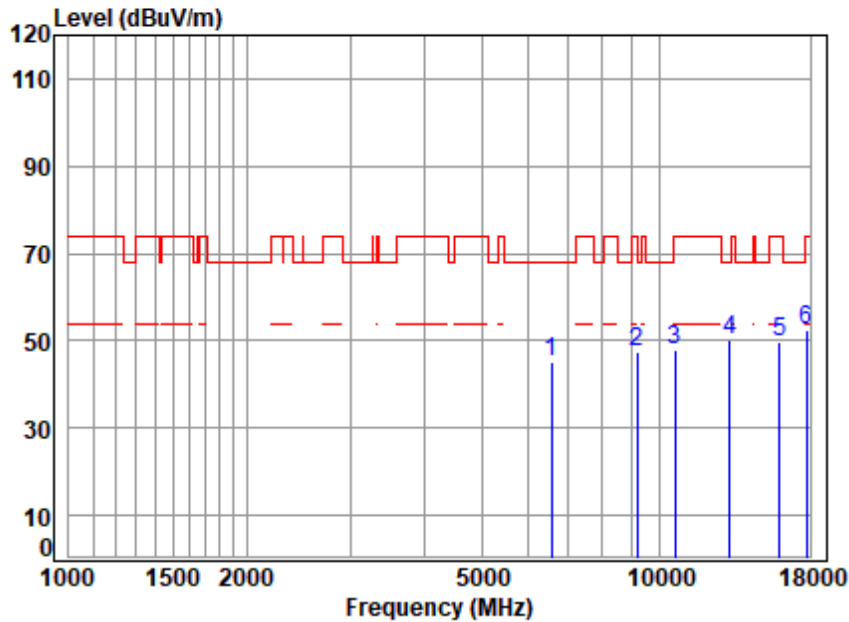

Condition: 3m VERTICAL

Job No : 01820MO

Mode : 5320 TX RSE


: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	6564.209	11.63	35.06	56.79	55.08	44.98	68.20 -23.22 peak
2	9178.972	12.28	38.12	54.84	51.71	47.27	74.00 -26.73 Peak
3	10640.000	13.77	39.34	53.72	48.46	47.85	74.00 -26.15 peak
4	pp13173.560	15.64	40.23	54.48	48.67	50.06	68.20 -18.14 peak
5	15960.000	17.20	38.64	54.01	48.07	49.90	74.00 -24.10 peak
6	17741.740	18.87	42.09	54.45	46.11	52.62	74.00 -21.38 peak





Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

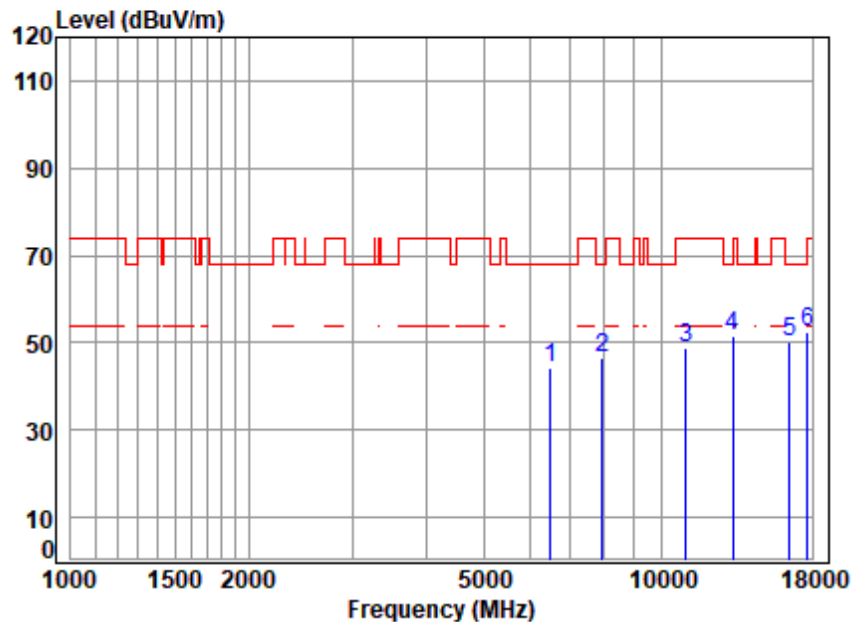

Condition: 3m HORIZONTAL

Job No : 01820MO

Mode : 5500 TX RSE

: 5G Wi-Fi 11a


	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6488.754	11.86	34.88	56.80	54.28	44.22	68.20	-23.98 peak
2	7943.838	11.55	37.69	55.94	53.29	46.59	68.20	-21.61 Peak
3	11000.000	14.17	39.40	53.50	48.56	48.63	74.00	-25.37 peak
4	13211.690	15.77	40.21	54.48	50.11	51.61	68.20	-16.59 peak
5	16500.000	17.74	38.90	54.15	47.74	50.23	68.20	-17.97 peak
6	pp17690.530	19.16	41.66	54.44	46.08	52.46	68.20	-15.74 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

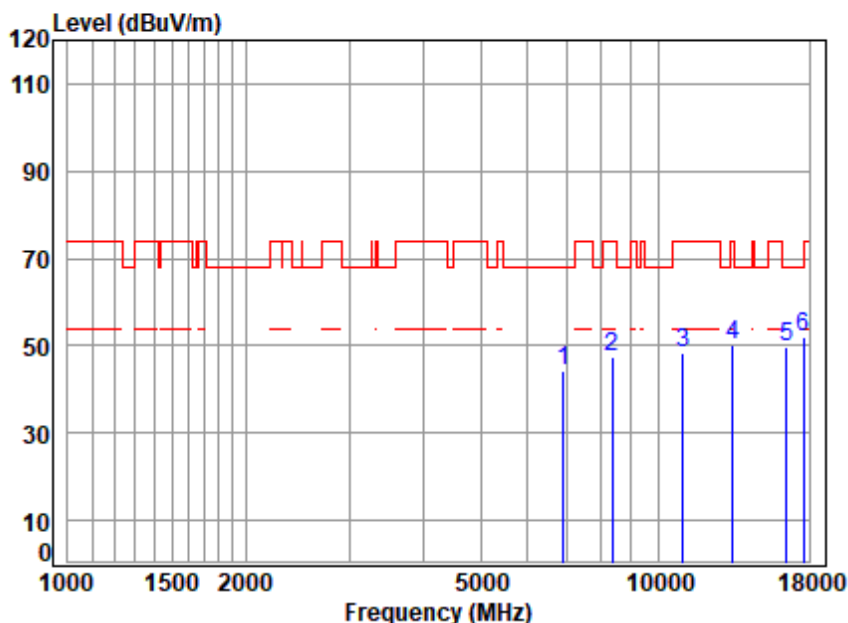

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5500 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	6914.763	11.37	36.17	56.72	53.35	44.17	68.20 -24.03 peak
2	8343.918	11.70	38.60	55.59	52.65	47.36	74.00 -26.64 Peak
3	11000.000	14.17	39.40	53.50	48.39	48.46	74.00 -25.54 peak
4	13365.320	16.13	40.30	54.46	48.19	50.16	74.00 -23.84 peak
5	16500.000	17.74	38.90	54.15	47.06	49.55	68.20 -18.65 peak
6	pp17639.470	19.52	40.89	54.43	46.23	52.21	68.20 -15.99 peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

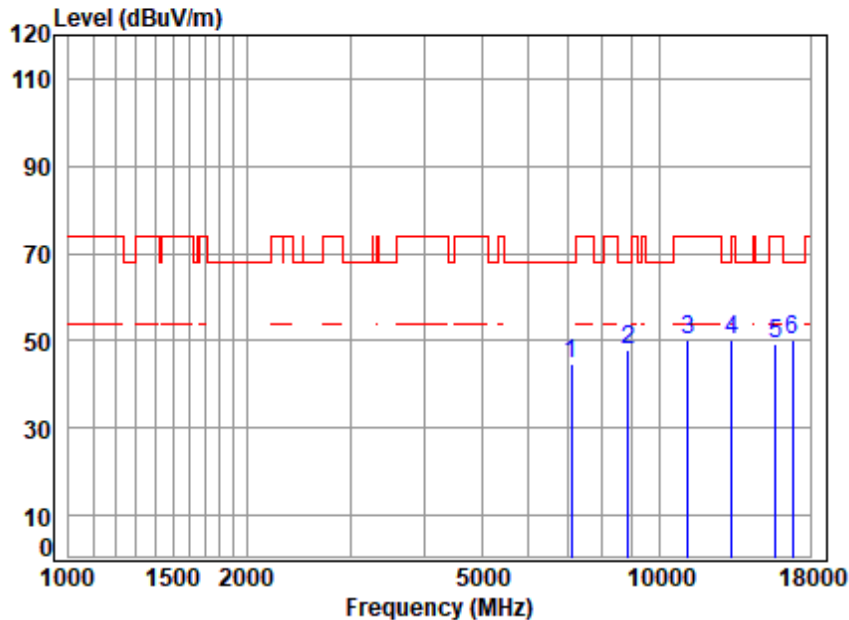

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5600 TX RSE

: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7096.999	11.97	36.39	56.62	52.98	44.72	68.20	-23.48	Peak
2	8866.062	12.23	38.53	55.12	52.46	48.10	68.20	-20.10	peak
3	11200.000	14.76	39.60	53.56	49.46	50.26	74.00	-23.74	peak
4	pp13249.930	16.10	40.25	54.48	48.33	50.20	68.20	-18.00	Peak
5	15759.050	17.13	38.54	54.07	47.89	49.49	74.00	-24.51	Peak
6	16800.000	17.46	39.60	54.24	47.18	50.00	68.20	-18.20	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

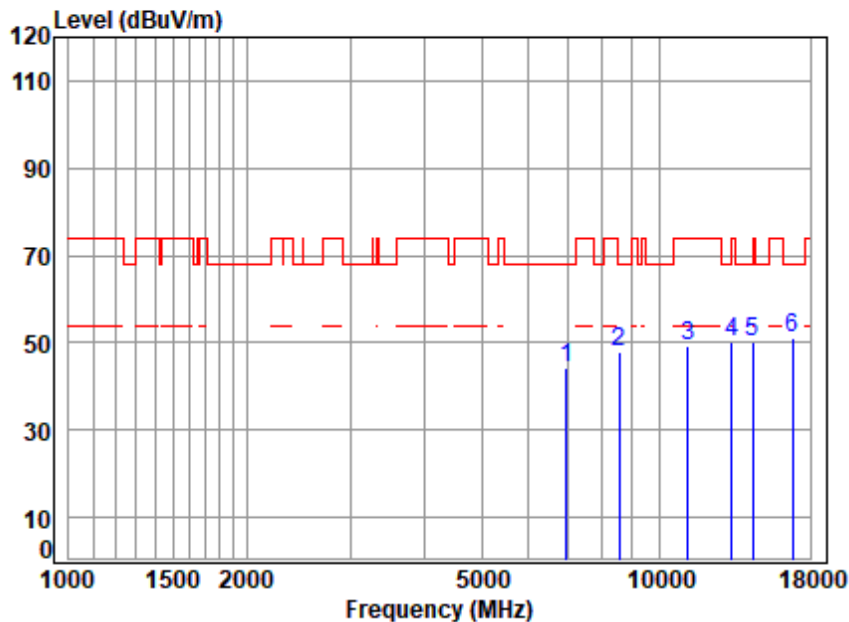

Condition: 3m VERTICAL

Job No : 01820MO

Mode : 5600 TX RSE


: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6954.852	11.37	36.11	56.71	53.58	44.35	68.20	-23.85 Peak
2	8539.102	12.17	38.30	55.41	52.90	47.96	68.20	-20.24 peak
3	11200.000	14.76	39.60	53.56	48.60	49.40	74.00	-24.60 peak
4	13288.280	16.44	40.29	54.47	47.96	50.22	74.00	-23.78 Peak
5	14408.430	16.88	39.59	54.36	47.86	49.97	68.20	-18.23 Peak
6	pp16800.000	17.46	39.60	54.24	48.22	51.04	68.20	-17.16 peak





Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

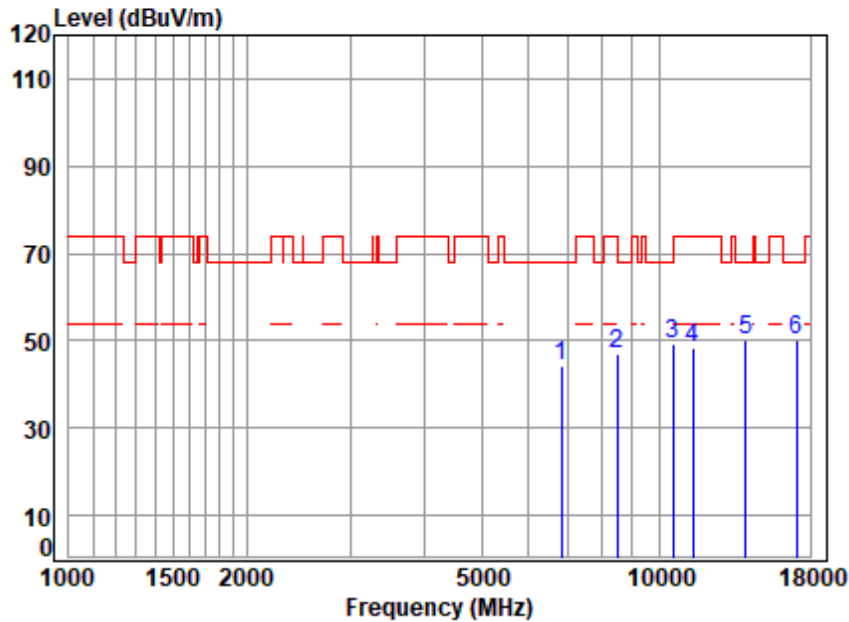

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5700 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6815.551	11.37	35.93	56.74	53.74	44.30	68.20	-23.90 peak
2	8489.882	12.24	38.32	55.46	52.10	47.20	74.00	-26.80 Peak
3	10545.010	13.62	39.19	53.77	50.44	49.48	68.20	-18.72 Peak
4	11400.000	14.21	39.70	53.62	48.10	48.39	74.00	-25.61 peak
5	pp13997.930	16.46	39.90	54.40	48.35	50.31	68.20	-17.89 peak
6	17100.000	18.47	39.80	54.32	46.21	50.16	68.20	-18.04 peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

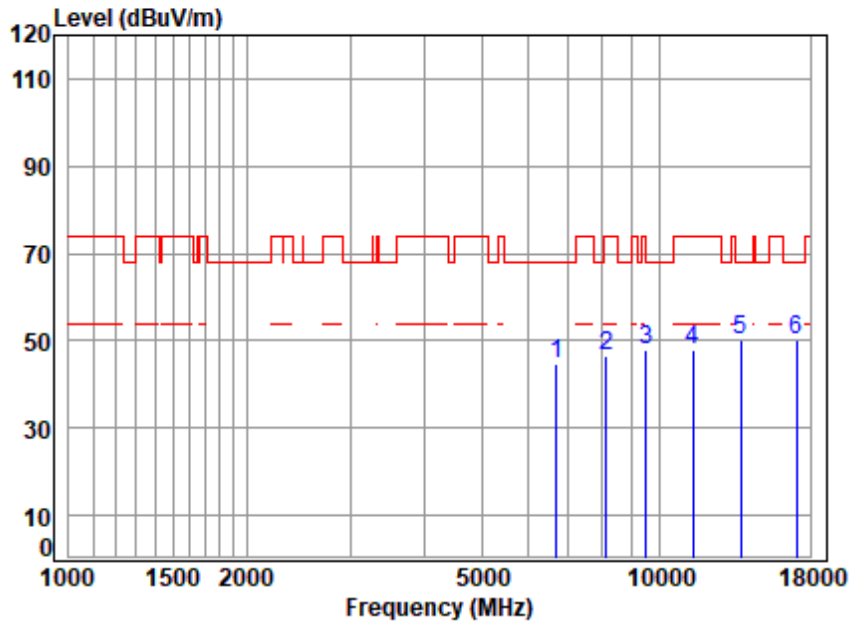

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5700 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	6698.373	11.41	35.40	56.76	54.55	44.60	68.20 -23.60 peak
2	8129.664	11.49	37.86	55.78	53.07	46.64	74.00 -27.36 Peak
3	9502.925	12.56	38.89	54.55	51.05	47.95	68.20 -20.25 Peak
4	11400.000	14.21	39.70	53.62	47.52	47.81	74.00 -26.19 peak
5	pp13717.560	16.33	39.98	54.43	48.38	50.26	68.20 -17.94 peak
6	17100.000	18.47	39.80	54.32	46.12	50.07	68.20 -18.13 peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

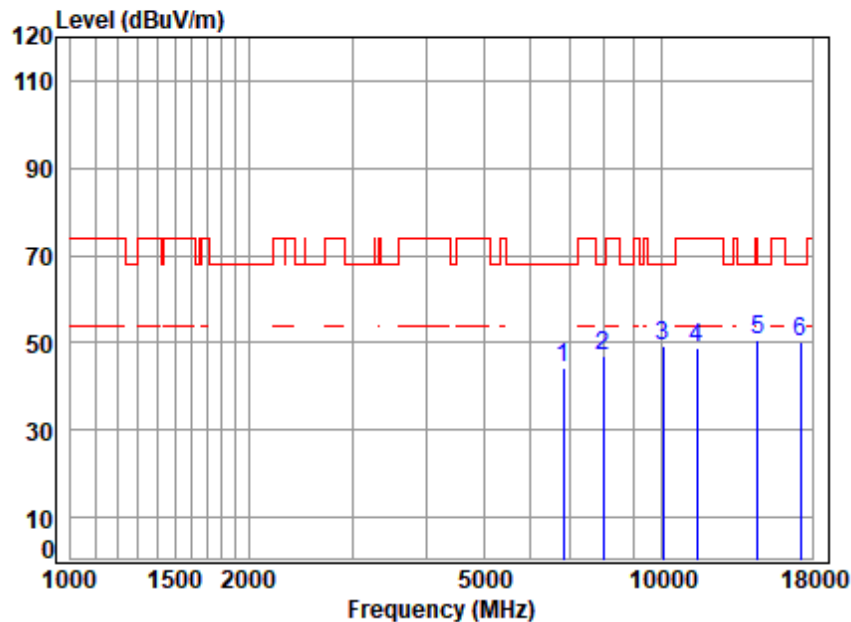

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5745 TX RSE

: 5.8G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6835.278	11.37	35.97	56.73	53.58	44.19	68.20	-24.01 Peak
2	7989.893	11.56	37.78	55.91	53.56	46.99	68.20	-21.21 Peak
3	10068.450	13.19	39.04	54.06	50.91	49.08	68.20	-19.12 Peak
4	11490.000	14.97	39.61	53.65	47.67	48.60	74.00	-25.40 peak
5	pp14533.910	16.79	39.43	54.35	48.98	50.85	68.20	-17.35 Peak
6	17235.000	17.83	40.01	54.35	46.84	50.33	68.20	-17.87 peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

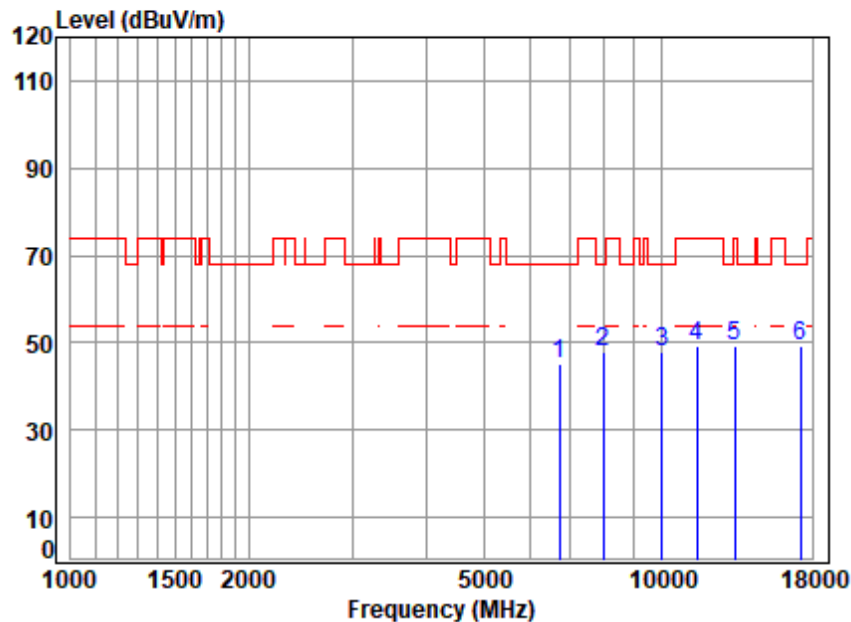

Condition: 3m VERTICAL

Job No : 01820MO

Mode : 5745 TX RSE


: 5.8G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6717.762	11.40	35.51	56.76	55.10	45.25	68.20	-22.95 Peak
2	7989.893	11.56	37.78	55.91	54.36	47.79	68.20	-20.41 Peak
3	10010.420	13.04	38.92	54.09	49.92	47.79	68.20	-20.41 Peak
4	11490.000	14.97	39.61	53.65	48.22	49.15	74.00	-24.85 peak
5	13326.750	16.37	40.30	54.47	47.08	49.28	74.00	-24.72 Peak
6	pp17235.000	17.83	40.01	54.35	45.68	49.17	68.20	-19.03 peak





Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

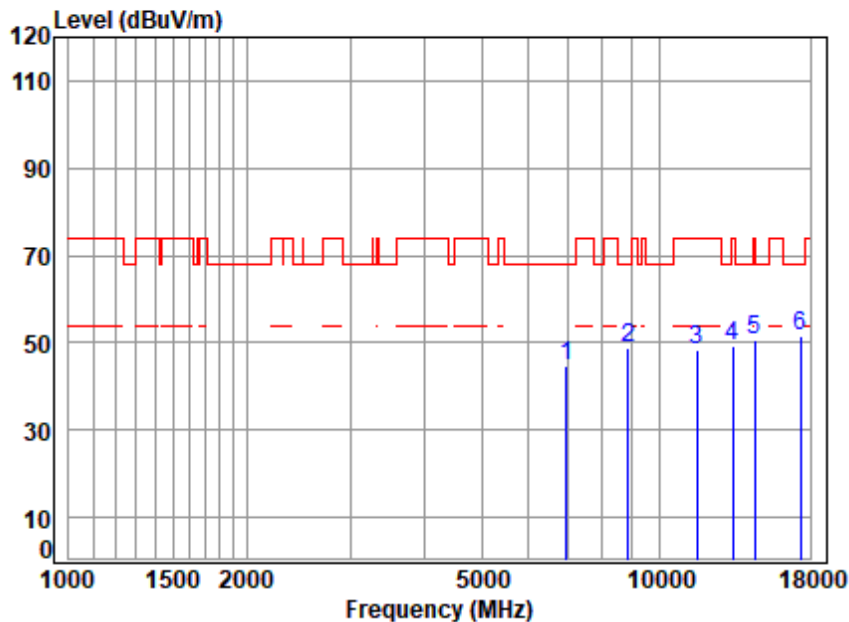

Condition: 3m HORIZONTAL

Job No : 01820MO

Mode : 5785 TX RSE

: 5.8G Wi-Fi 11a


	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6954.852	11.37	36.11	56.71	53.84	44.61	68.20	-23.59 Peak
2	8840.473	12.24	38.50	55.14	53.22	48.82	68.20	-19.38 Peak
3	11570.000	14.78	39.60	53.67	47.83	48.54	74.00	-25.46 peak
4	13326.750	16.37	40.30	54.47	47.11	49.31	74.00	-24.69 Peak
5	14491.960	17.07	39.51	54.35	48.48	50.71	74.00	-23.29 Peak
6	pp17355.000	18.00	40.31	54.37	47.42	51.36	68.20	-16.84 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

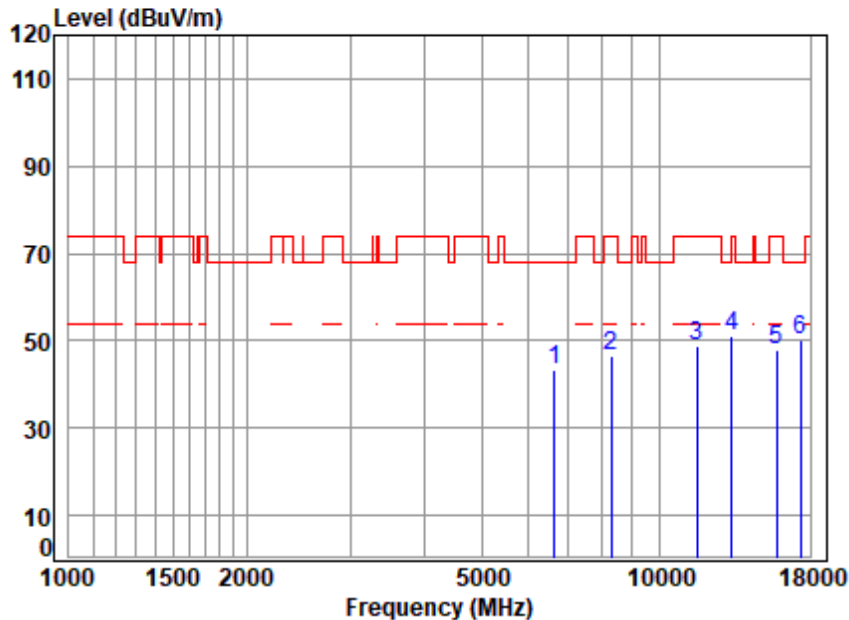

Condition: 3m VERTICAL

Job No : 01820MO

Mode : 5785 TX RSE

: 5.8G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6640.542	11.52	35.44	56.77	53.01	43.20	68.20	-25.00 Peak
2	8295.823	11.75	37.89	55.63	52.73	46.74	74.00	-27.26 Peak
3	11570.000	14.78	39.60	53.67	47.90	48.61	74.00	-25.39 peak
4	13288.280	16.44	40.29	54.47	48.89	51.15	74.00	-22.85 Peak
5	15804.660	17.04	38.51	54.06	46.28	47.77	74.00	-26.23 Peak
6	pp17355.000	18.00	40.31	54.37	46.28	50.22	68.20	-17.98 peak




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250500182005

Page: 51 of 290

Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

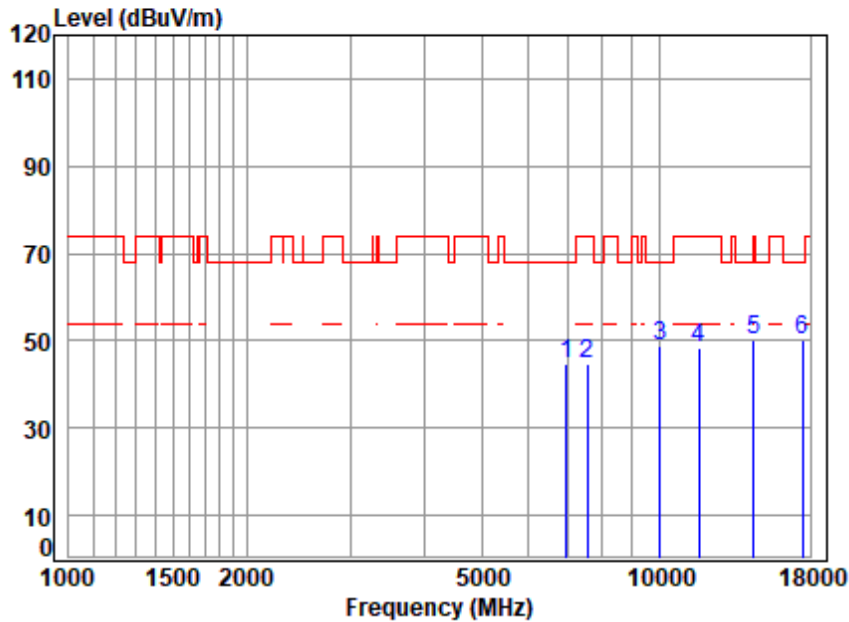

Condition: 3m HORIZONTAL

Job No : 01820MO

Mode : 5825 TX RSE

: 5.8G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	6954.852	11.37	36.11	56.71	53.73	44.50	68.20 -23.70 Peak
2	7562.942	11.14	36.80	56.25	52.85	44.54	74.00 -29.46 Peak
3	10039.390	13.11	38.98	54.08	50.88	48.89	68.20 -19.31 Peak
4	11650.000	14.69	39.55	53.69	47.82	48.37	74.00 -25.63 peak
5	pp14450.130	16.98	39.55	54.35	48.17	50.35	68.20 -17.85 Peak
6	17475.000	18.35	40.78	54.40	45.52	50.25	68.20 -17.95 peak




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

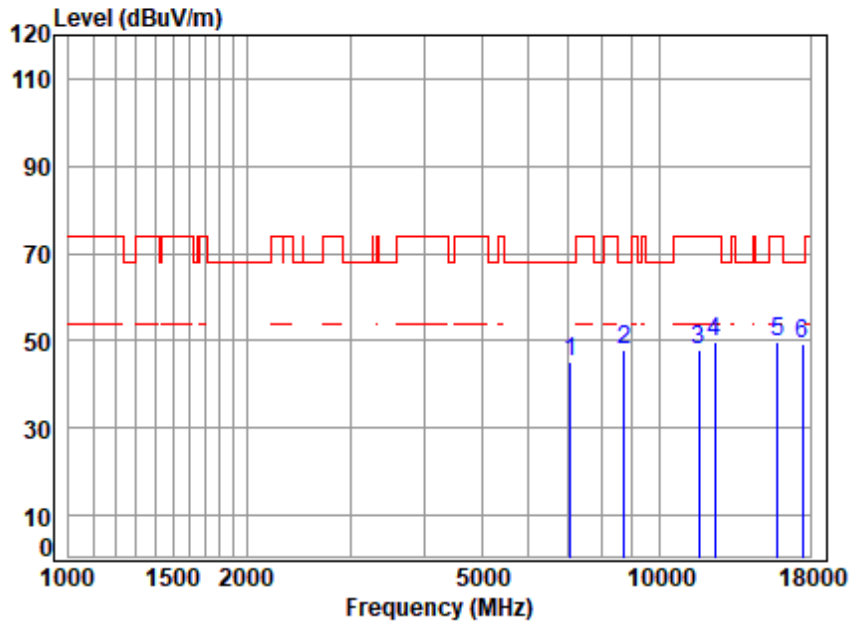

Condition: 3m VERTICAL

Job No : 01820MO

Mode : 5825 TX RSE

: 5.8G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	7076.516	11.84	36.35	56.64	53.77	45.32	68.20 -22.88 Peak
2	8713.630	12.11	38.57	55.26	52.34	47.76	68.20 -20.44 Peak
3	11650.000	14.69	39.55	53.69	47.33	47.88	74.00 -26.12 peak
4	12433.620	15.38	39.90	54.10	48.54	49.72	74.00 -24.28 Peak
5	15850.410	17.16	38.60	54.04	47.97	49.69	74.00 -24.31 Peak
6	pp17475.000	18.35	40.78	54.40	44.75	49.48	68.20 -18.72 peak





## 7.5 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

\*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 22.3 °C


Humidity: 50.9 % RH

Atmospheric Pressure: 3.50 mbar

### 7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

### 7.5.3 Test Setup Diagram

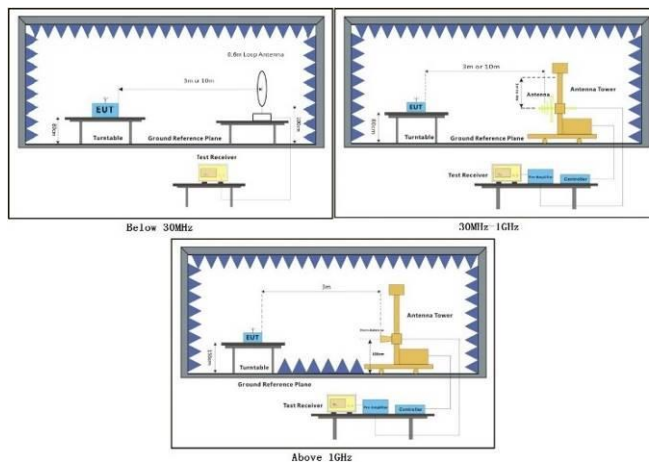

## 7.5.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 3. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.



Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

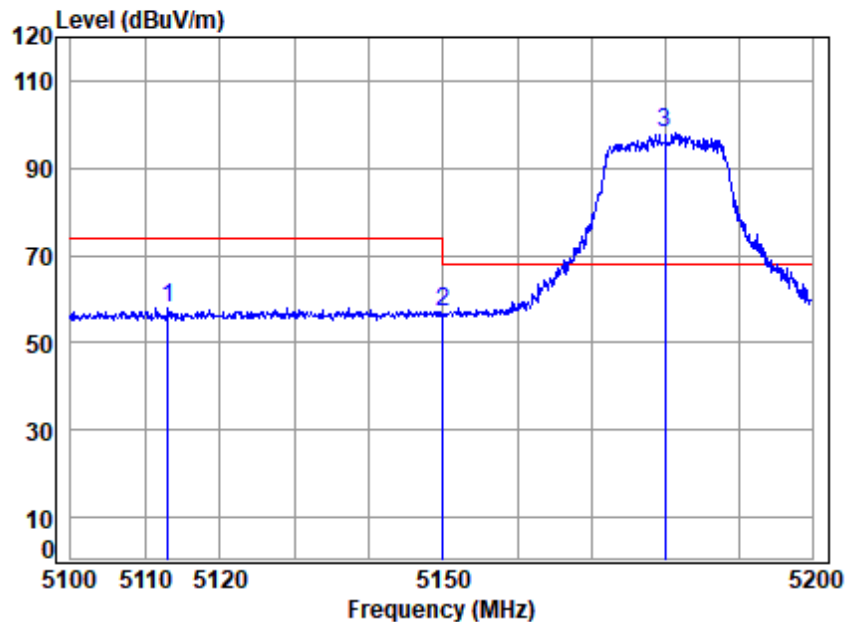

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5180 Band edge  
: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5112.990	10.00	32.33	30.85	46.48	57.96	74.00	-16.04 peak
2 5149.980	10.14	32.40	30.84	45.13	56.83	74.00	-17.17 peak
3 pp 5180.000	10.25	32.46	30.83	86.17	98.05	68.20	29.85 peak





Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

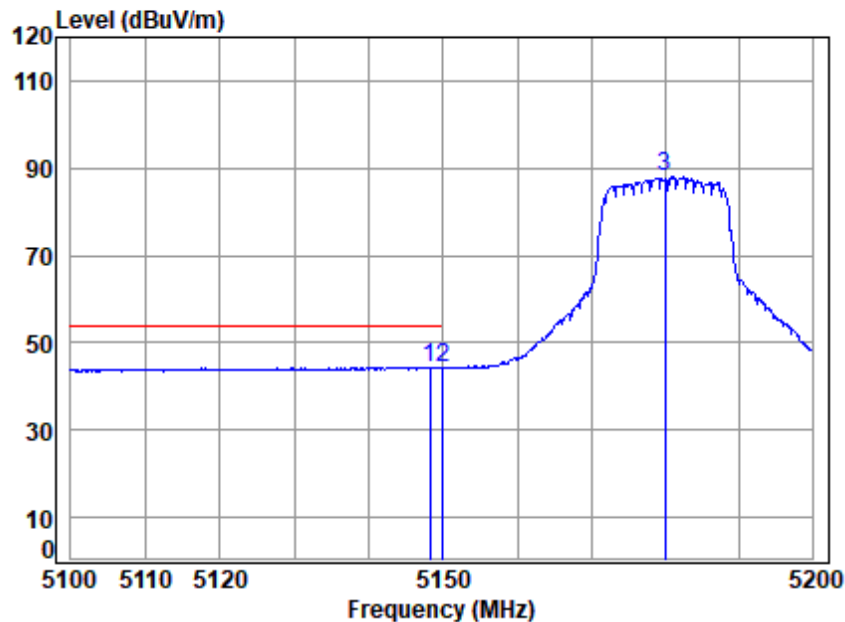

Condition: 3m HORIZONTAL

Job No : 01820MO

Mode : 5180 Band edge  
: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5148.158	10.13	32.40	30.84	32.71	44.40	54.00	-9.60	Average
2	5149.980	10.14	32.40	30.84	32.64	44.34	54.00	-9.66	Average
3	5180.000	10.25	32.46	30.83	76.14	88.02	-----	-----	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing and Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

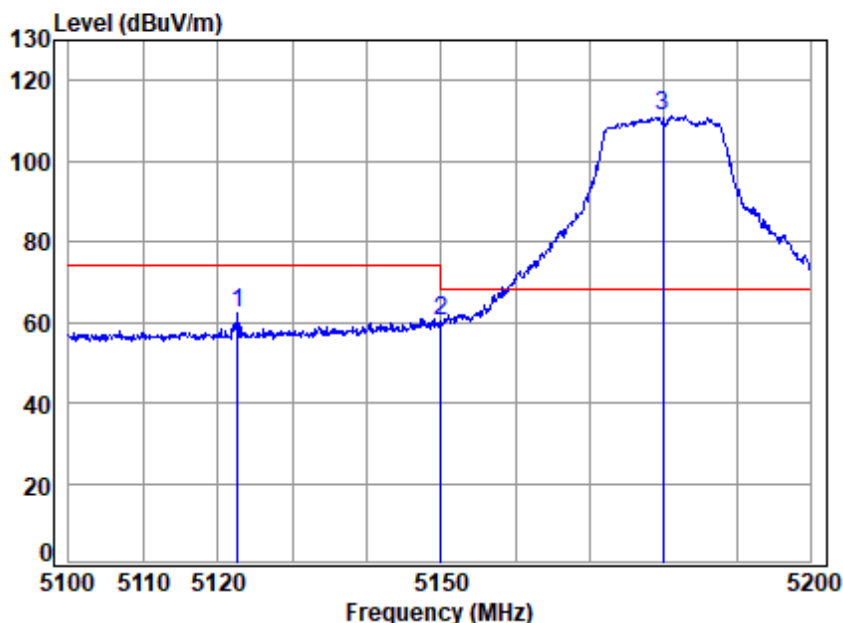

Condition: 3m VERTICAL

Job No : 01820MO

Mode : 5180 Band edge  
: 5G Wi-Fi 11a


		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5122.629	10.04	32.35	30.85	50.73	62.27	74.00	-11.73	Peak
2	5149.980	10.14	32.40	30.84	48.56	60.26	74.00	-13.74	Peak
3	pp 5180.000	10.25	32.46	30.83	99.18	111.06	68.20	42.86	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

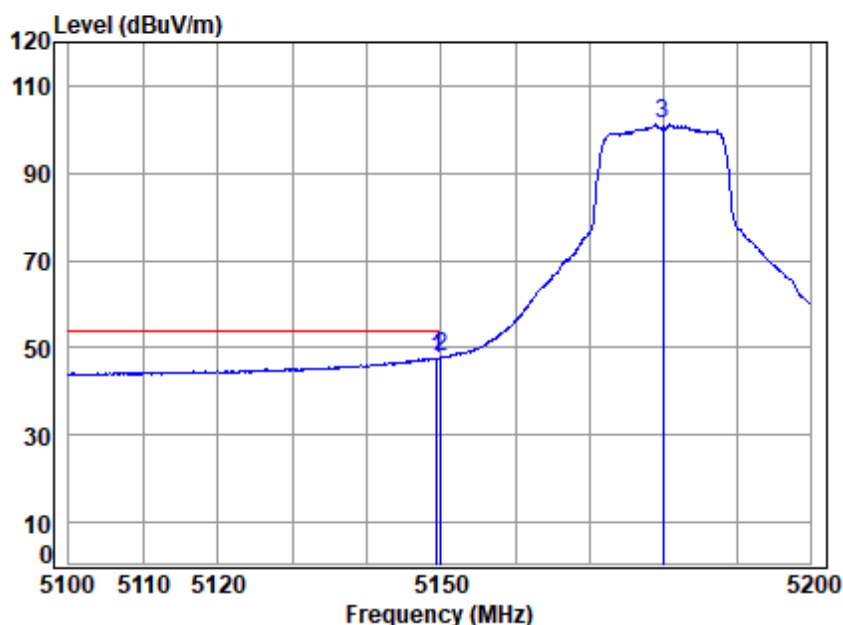

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5180 Band edge  
: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.458	10.14	32.40	30.84	35.87	47.57	54.00	-6.43	Average
2 pp	5149.980	10.14	32.40	30.84	36.24	47.94	54.00	-6.06	Average
3	5180.000	10.25	32.46	30.83	89.23	101.11	-----	-----	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

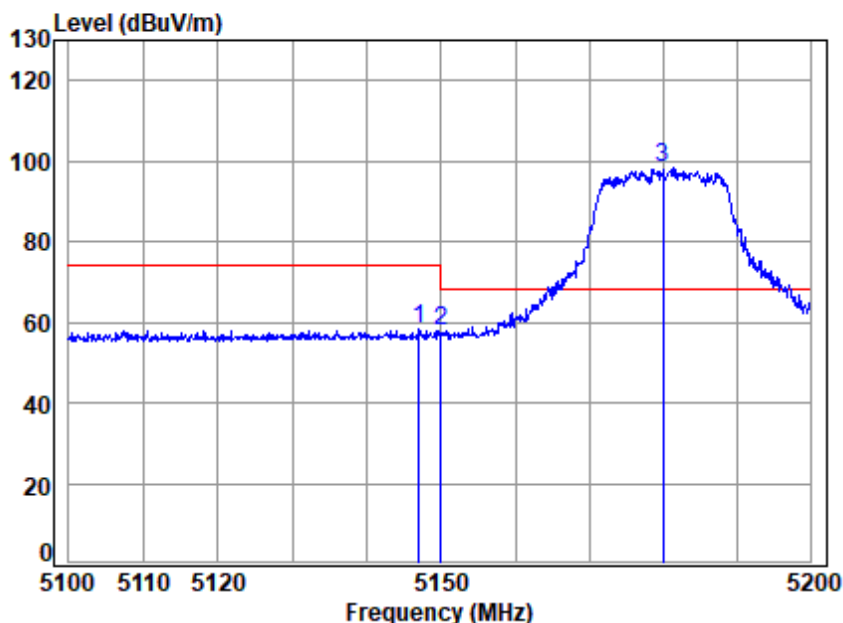

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5180 Band edge  
: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5147.058	10.13	32.39	30.84	46.40	58.08	74.00	-15.92	peak
2	5149.980	10.14	32.40	30.84	45.96	57.66	74.00	-16.34	peak
3 pp	5180.000	10.25	32.46	30.83	86.25	98.13	68.20	29.93	peak





Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

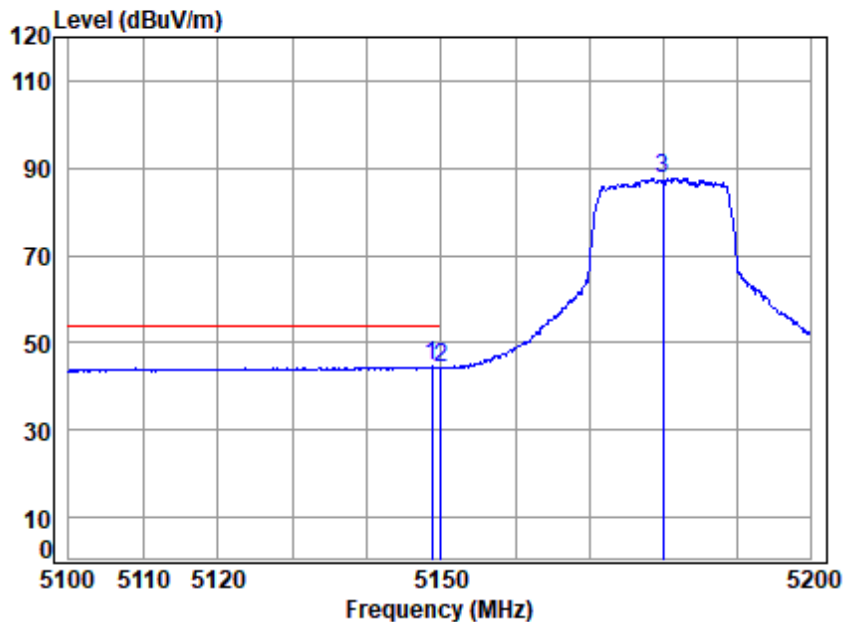

Condition: 3m HORIZONTAL


Job No : 01820MO

Mode : 5180 Band edge  
: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5148.757	10.14	32.40	30.84	32.80	44.50	54.00	-9.50	Average
2	5149.980	10.14	32.40	30.84	32.78	44.48	54.00	-9.52	Average
3	5180.000	10.25	32.46	30.83	75.78	87.66	-----	-----	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

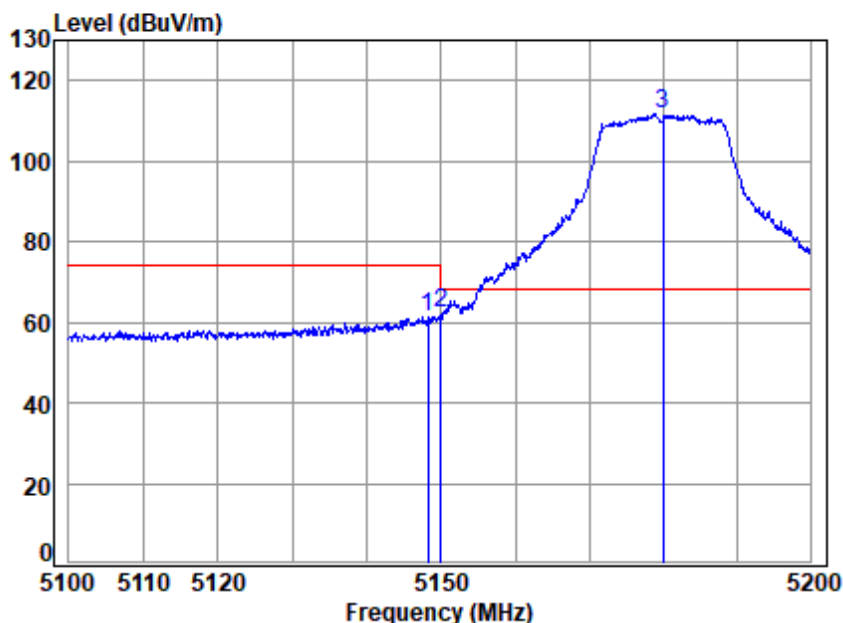

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5180 Band edge  
: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.257	10.13	32.40	30.84	49.82	61.51	74.00	-12.49	Peak
2	5149.980	10.14	32.40	30.84	50.41	62.11	74.00	-11.89	Peak
3 pp	5180.000	10.25	32.46	30.83	99.65	111.53	68.20	43.33	Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

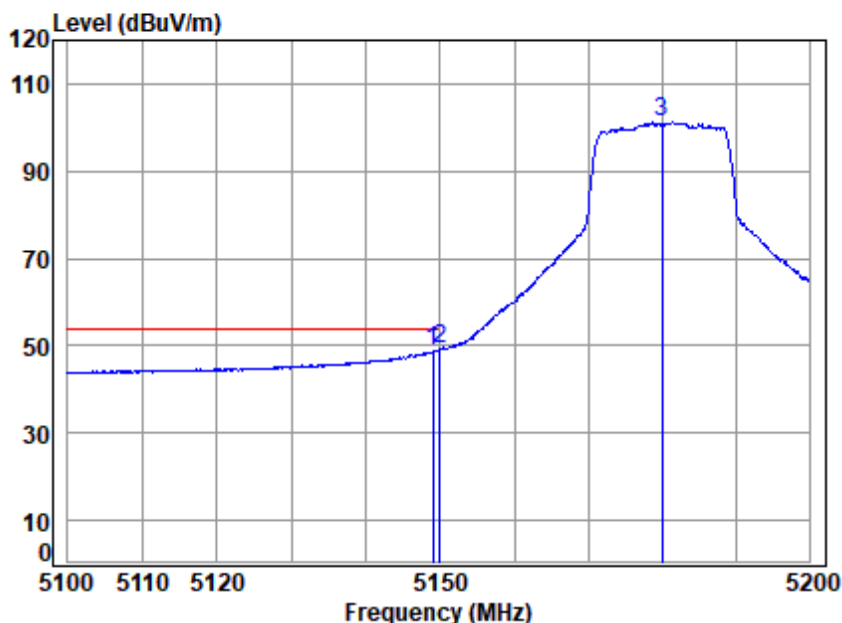

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5180 Band edge

: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.057	10.14	32.40	30.84	37.22	48.92	54.00	-5.08	Average
2 pp	5149.980	10.14	32.40	30.84	37.54	49.24	54.00	-4.76	Average
3	5180.000	10.25	32.46	30.83	89.30	101.18	-----	-----	Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

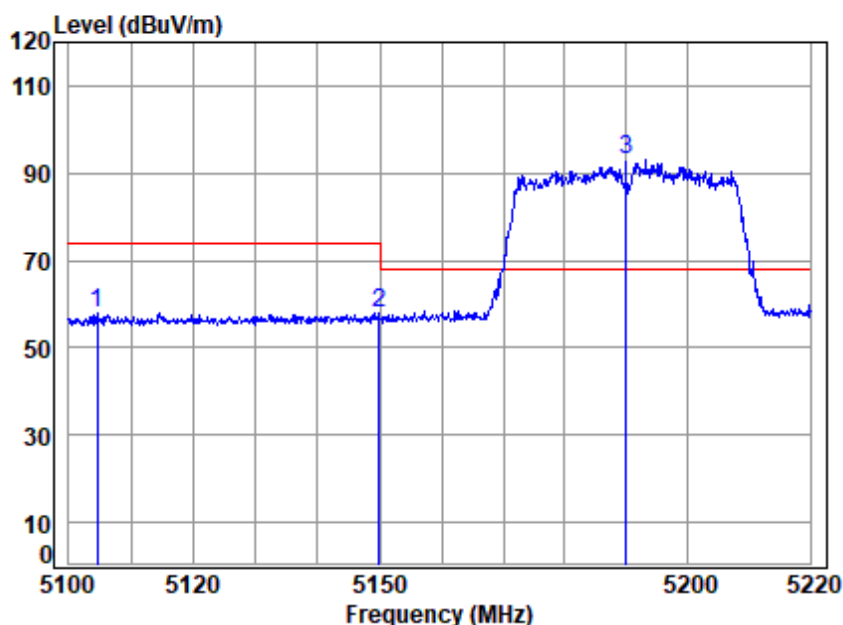

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5190 Band edge  
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5104.509	9.97	32.31	30.86	46.72	58.14	74.00	-15.86 peak
2	5149.980	10.14	32.40	30.84	46.22	57.92	74.00	-16.08 peak
3	pp 5190.000	10.29	32.48	30.82	81.19	93.14	68.20	24.94 peak





Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

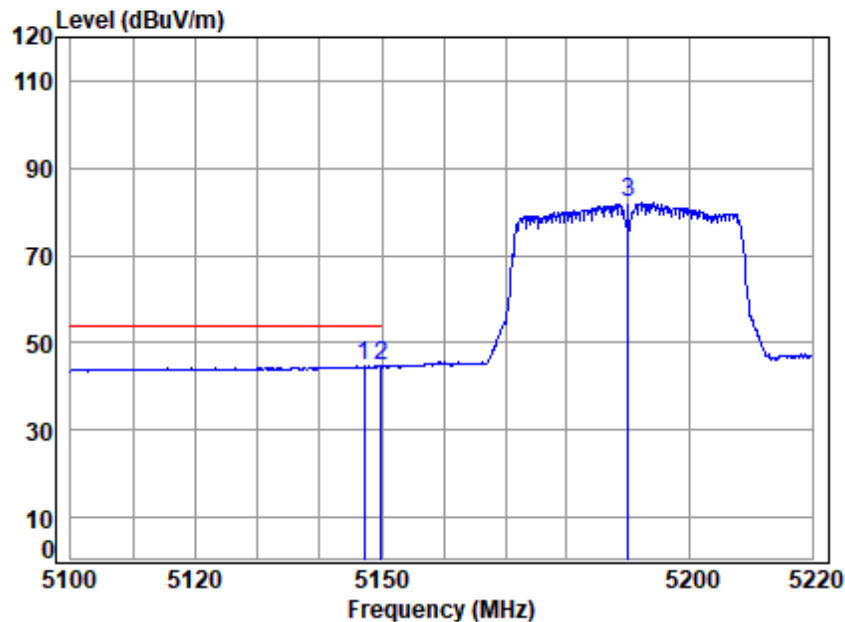

Condition: 3m HORIZONTAL


Job No : 01820MO

Mode : 5190 Band edge  
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5147.187	10.13	32.39	30.84	33.06	44.74	54.00	-9.26	Average
2	5149.980	10.14	32.40	30.84	32.80	44.50	54.00	-9.50	Average
3	5190.000	10.29	32.48	30.82	70.09	82.04	-----	-----	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

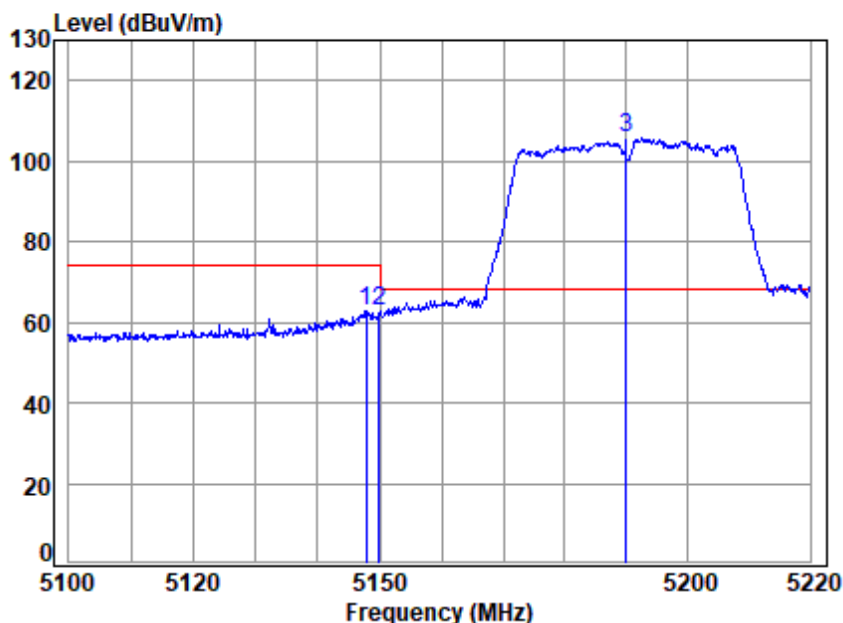

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5190 Band edge  
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5147.785	10.13	32.40	30.84	51.30	62.99	74.00	-11.01 Peak
2	5149.980	10.14	32.40	30.84	51.04	62.74	74.00	-11.26 Peak
3 pp	5190.000	10.29	32.48	30.82	93.71	105.66	68.20	37.46 Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

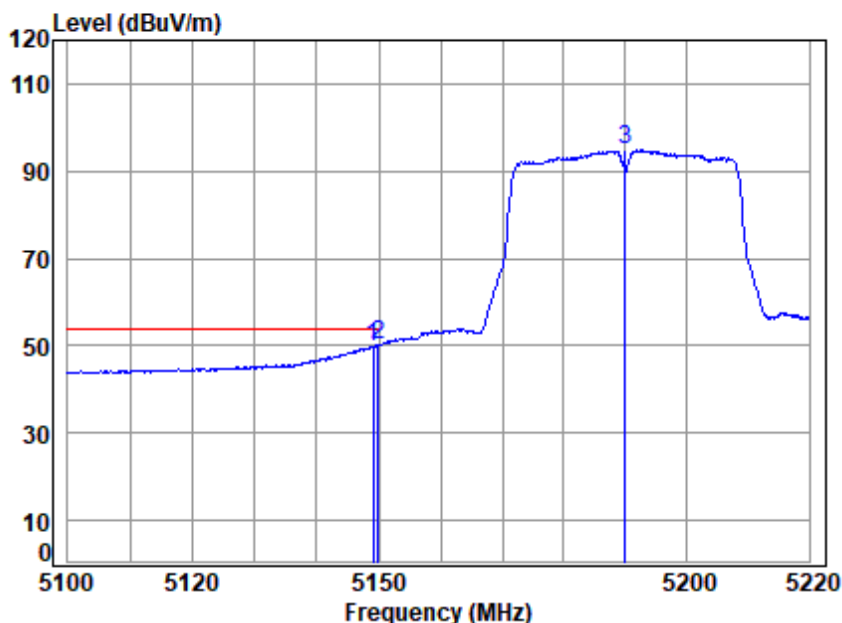

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5190 Band edge  
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5149.102	10.14	32.40	30.84	38.22	49.92	54.00	-4.08 Average
2 pp	5149.980	10.14	32.40	30.84	38.61	50.31	54.00	-3.69 Average
3	5190.000	10.29	32.48	30.82	82.87	94.82	-----	----- Average



Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

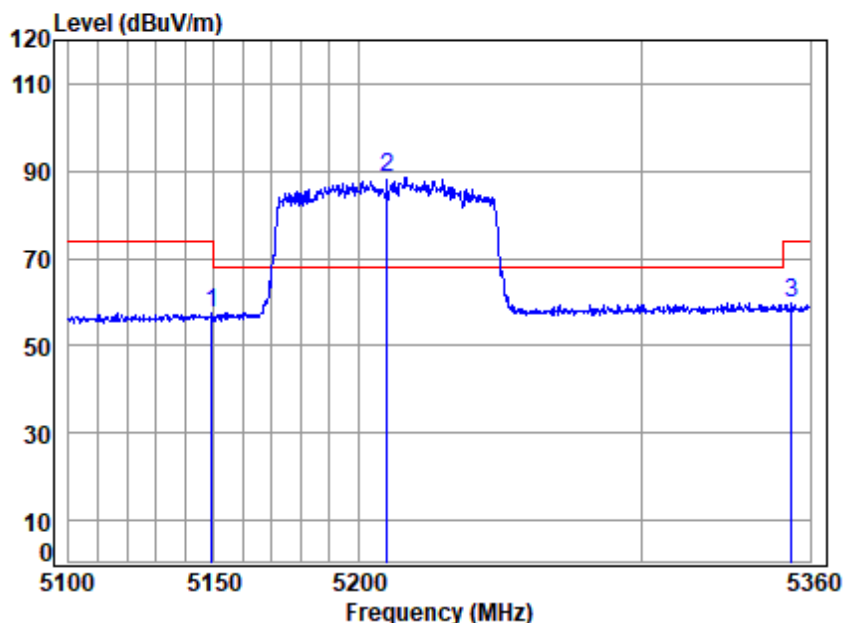

Condition: 3m HORIZONTAL

Job No : 01820MO

Mode : 5210 Band edge


: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.178	10.14	32.40	30.84	45.81	57.51	74.00	-16.49	peak
2 pp	5210.000	10.32	32.52	30.82	76.47	88.49	68.20	20.29	peak
3	5353.341	10.46	32.80	30.76	47.15	59.65	74.00	-14.35	peak





Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

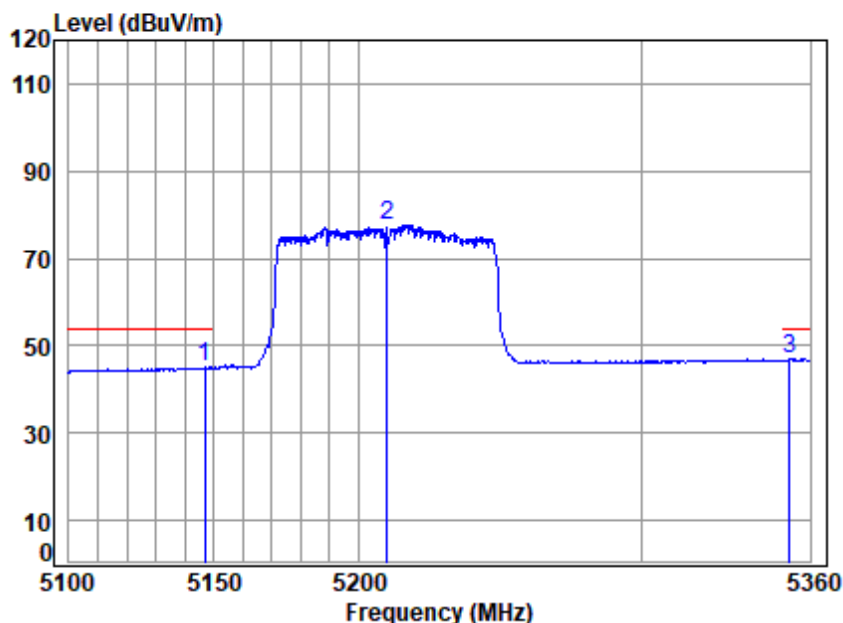

Condition: 3m HORIZONTAL


Job No : 01820MO

Mode : 5210 Band edge  
: 5G Wi-Fi 11ac80

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
5146.875	10.13	32.39	30.84	33.36	45.04	54.00	-8.96	Average
5210.000	10.32	32.52	30.82	65.60	77.62	-----	-----	Average
5352.542	10.46	32.80	30.76	34.40	46.90	54.00	-7.10	Average



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

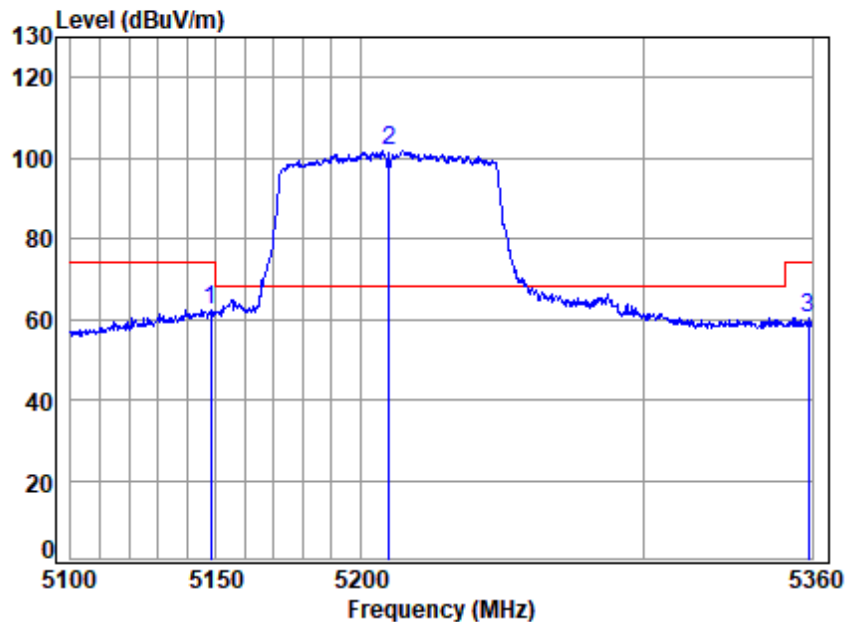

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5210 Band edge  
: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.154	10.13	32.40	30.84	50.60	62.29	74.00	-11.71	Peak
2 pp	5210.000	10.32	32.52	30.82	89.66	101.68	68.20	33.48	Peak
3	5358.667	10.48	32.80	30.76	47.65	60.17	74.00	-13.83	Peak



Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

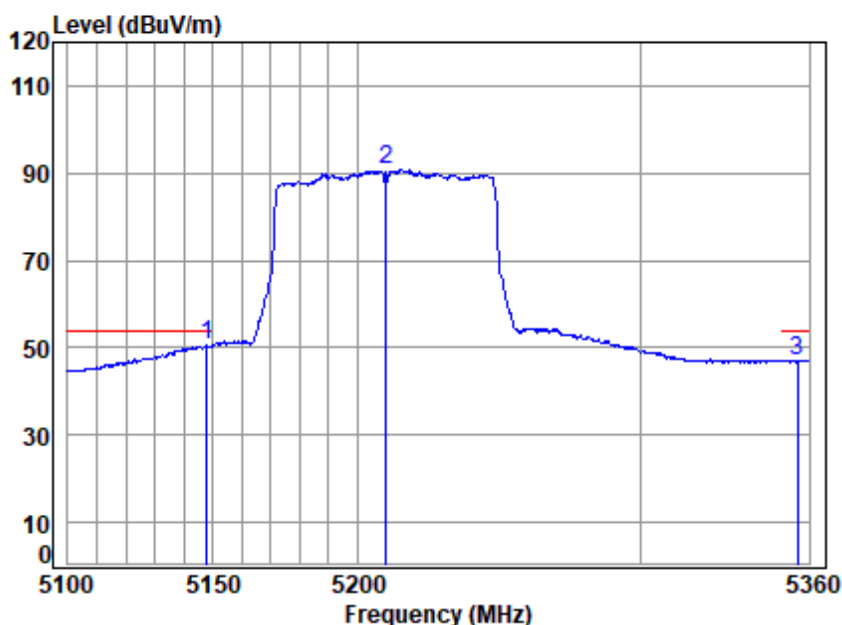

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5210 Band edge

: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5147.643	10.13	32.40	30.84	38.92	50.61	54.00	-3.39	Average
2	5210.000	10.32	32.52	30.82	78.71	90.73	-----	-----	Average
3	5356.004	10.47	32.80	30.76	34.60	47.11	54.00	-6.89	Average



Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

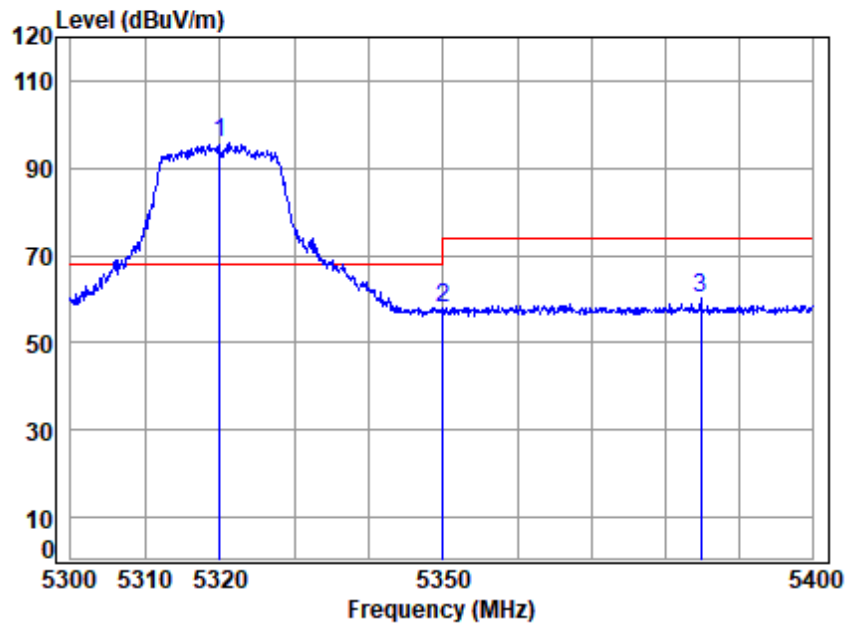

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5320 Band edge  
: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5320.000	10.35	32.74	30.77	83.46	95.78	68.20	27.58	peak
2	5350.020	10.45	32.80	30.76	45.32	57.81	74.00	-16.19	peak
3	5384.880	10.57	32.80	30.75	47.52	60.14	74.00	-13.86	peak





Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

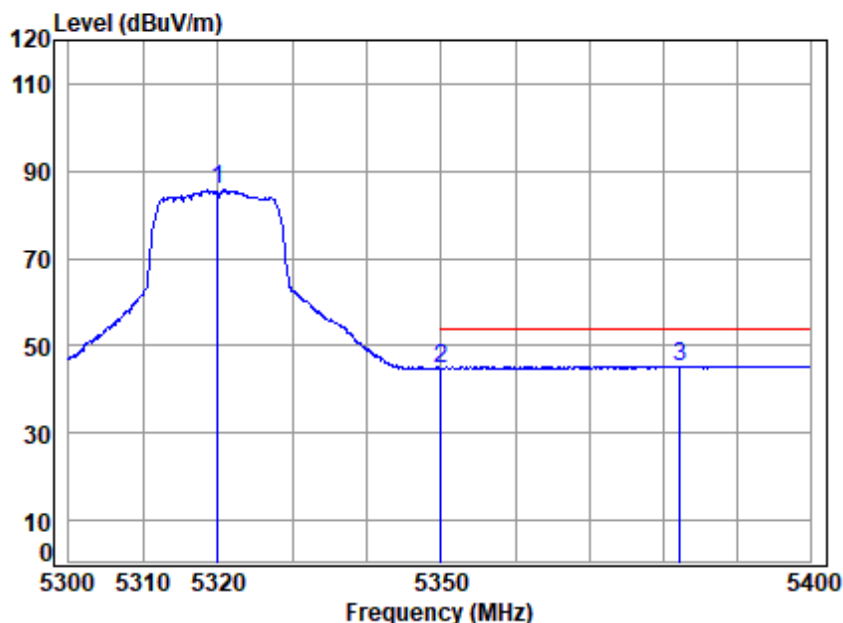

Condition: 3m HORIZONTAL


Job No : 01820MO

Mode : 5320 Band edge  
: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5320.000	10.35	32.74	30.77	73.64	85.96	-----	----- Average
2 5350.020	10.45	32.80	30.76	32.45	44.94	54.00	-9.06 Average
3 pp 5382.365	10.56	32.80	30.75	32.78	45.39	54.00	-8.61 Average



Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

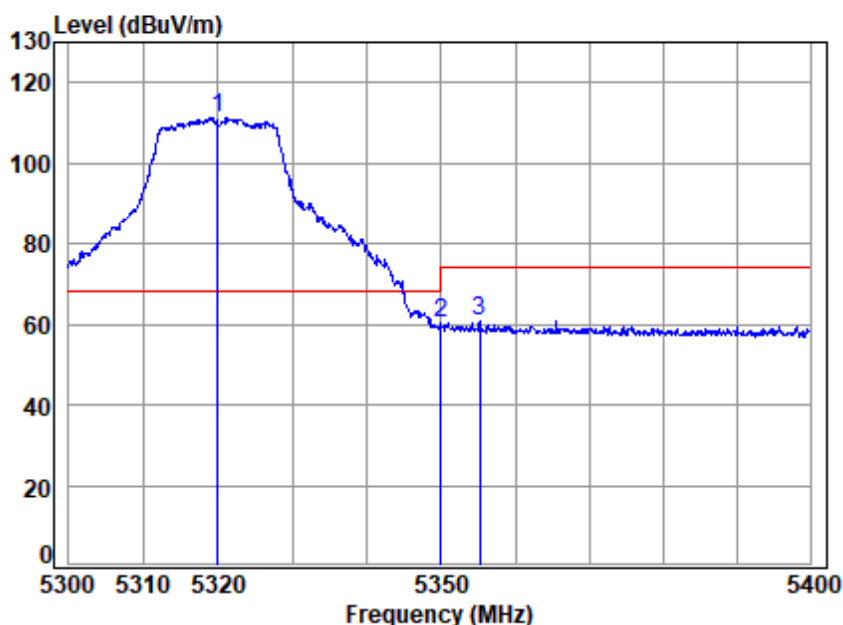

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5320 Band edge

: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5320.000	10.35	32.74	30.77	98.72	111.04	68.20	42.84	Peak
2	5350.020	10.45	32.80	30.76	47.72	60.21	74.00	-13.79	Peak
3	5355.169	10.47	32.80	30.76	48.46	60.97	74.00	-13.03	Peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

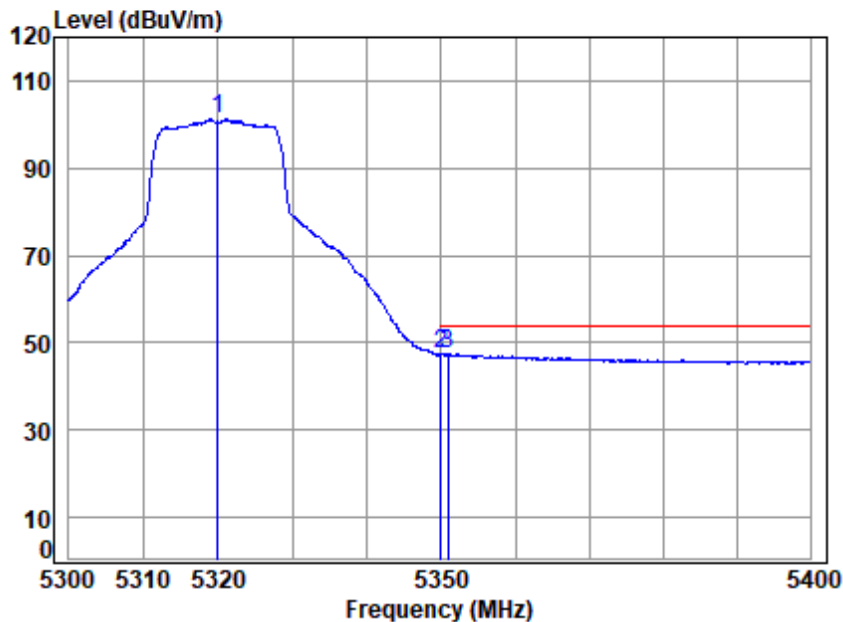

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5320 Band edge  
: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	10.35	32.74	30.77	88.90	101.22	-----	-----	Average
2	5350.020	10.45	32.80	30.76	34.98	47.47	54.00	-6.53	Average
3 pp	5350.966	10.45	32.80	30.76	35.15	47.64	54.00	-6.36	Average



Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

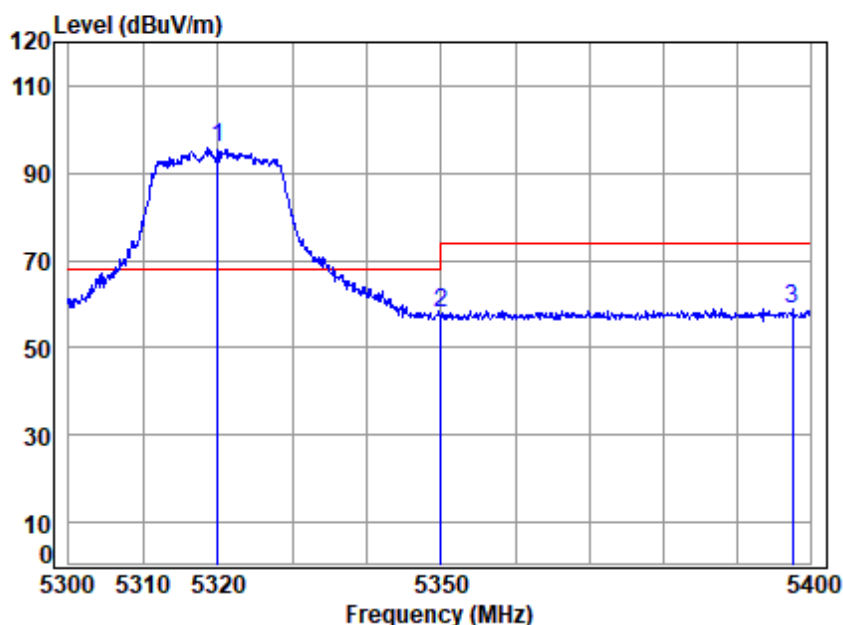

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5320 Band edge  
: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5320.000	10.35	32.74	30.77	83.33	95.65	68.20	27.45	peak
2	5350.020	10.45	32.80	30.76	45.36	57.85	74.00	-16.15	peak
3	5397.578	10.61	32.80	30.74	46.36	59.03	74.00	-14.97	peak





Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

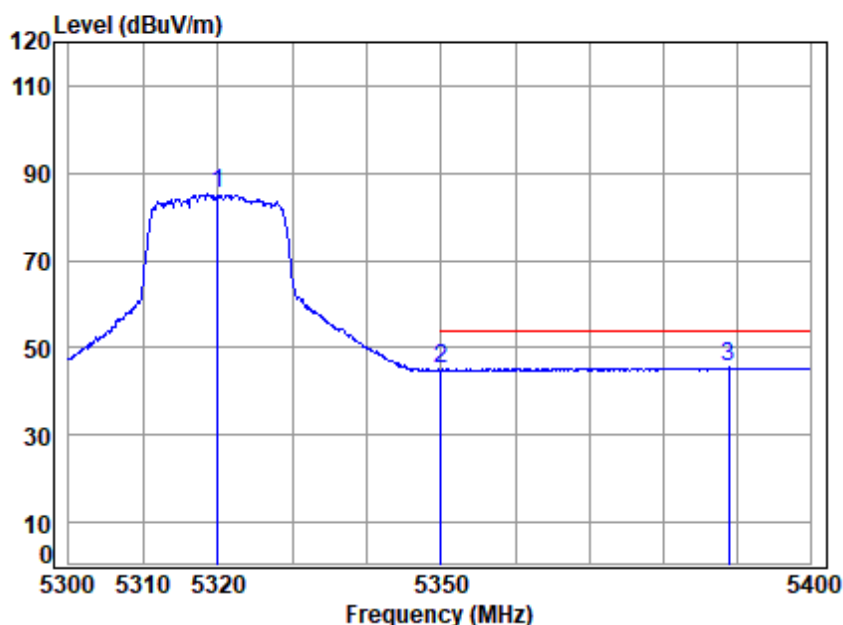

Condition: 3m HORIZONTAL


Job No : 01820MO

Mode : 5320 Band edge  
: 5G Wi-Fi 11n20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5320.000	10.35	32.74	30.77	72.94	85.26	-----	----- Average
2 5350.020	10.45	32.80	30.76	32.49	44.98	54.00	-9.02 Average
3 pp 5388.908	10.58	32.80	30.74	32.77	45.41	54.00	-8.59 Average



Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

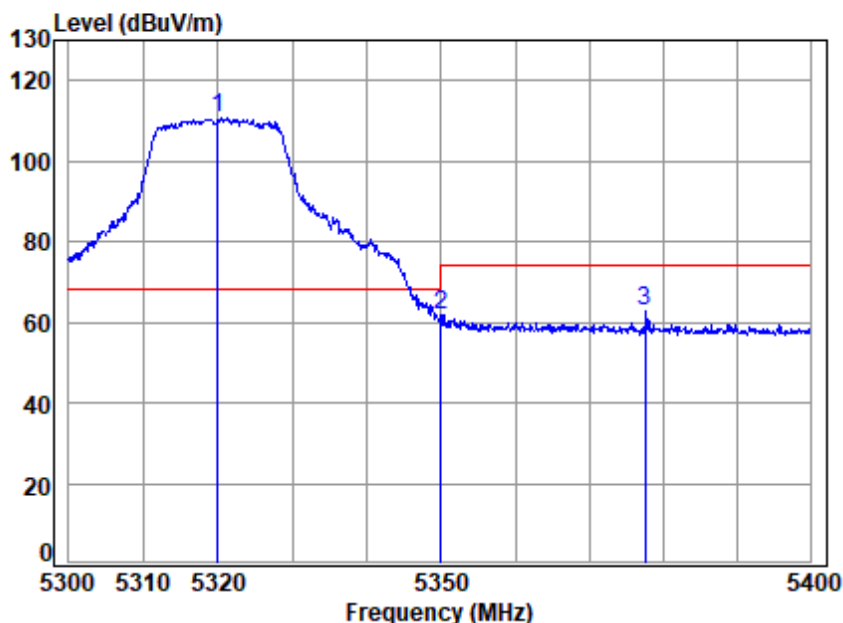

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5320 Band edge  
: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5320.000	10.35	32.74	30.77	98.28	110.60	68.20	42.40	Peak
2	5350.020	10.45	32.80	30.76	49.11	61.60	74.00	-12.40	Peak
3	5377.638	10.54	32.80	30.75	50.23	62.82	74.00	-11.18	Peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

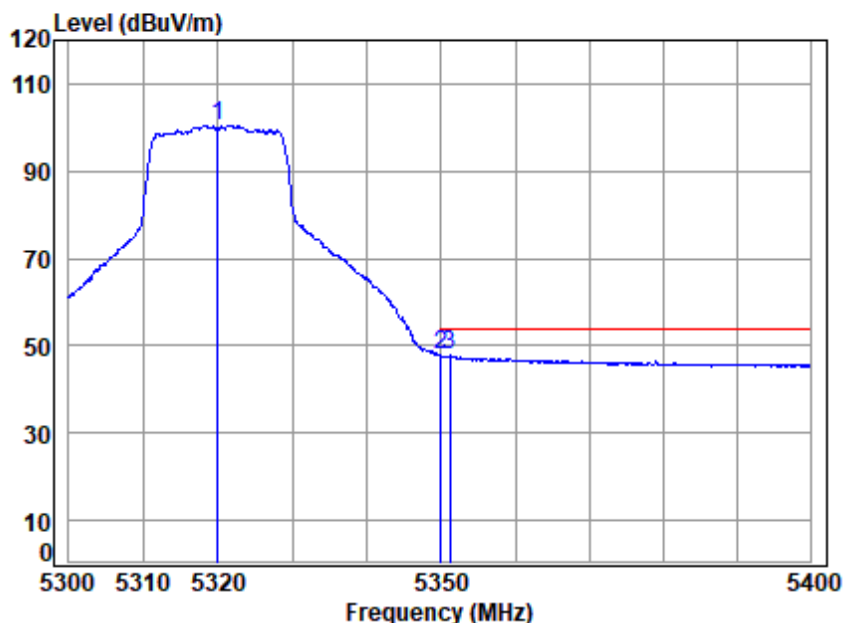

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5320 Band edge

: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	10.35	32.74	30.77	88.23	100.55	-----	-----	Average
2	5350.020	10.45	32.80	30.76	35.20	47.69	54.00	-6.31	Average
3 pp	5351.167	10.45	32.80	30.76	35.22	47.71	54.00	-6.29	Average



Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

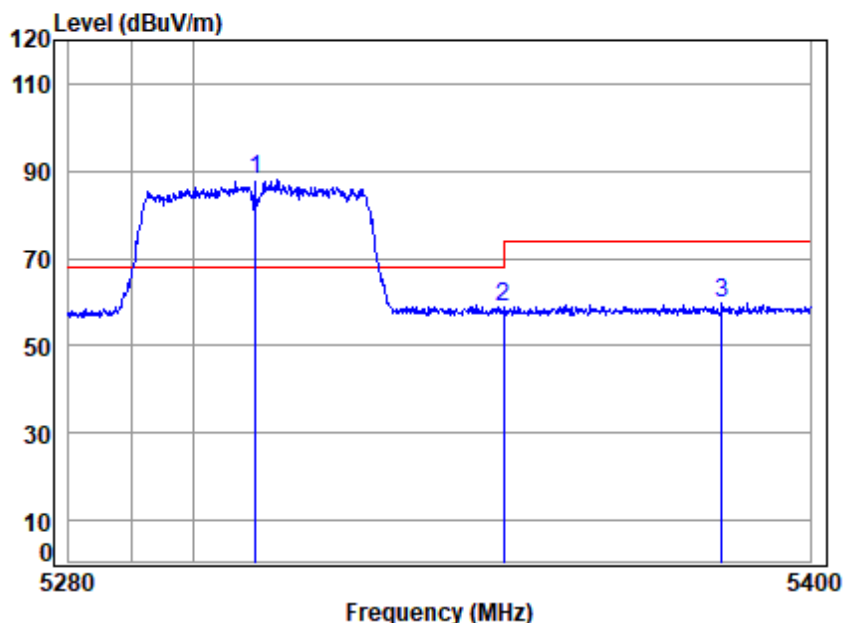

Condition: 3m HORIZONTAL

Job No : 01820MO

Mode : 5310 Band edge

: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5310.000	10.31	32.72	30.78	75.81	88.06	68.20	19.86	peak
2	5350.020	10.45	32.80	30.76	46.33	58.82	74.00	-15.18	peak
3	5385.578	10.57	32.80	30.75	47.16	59.78	74.00	-14.22	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

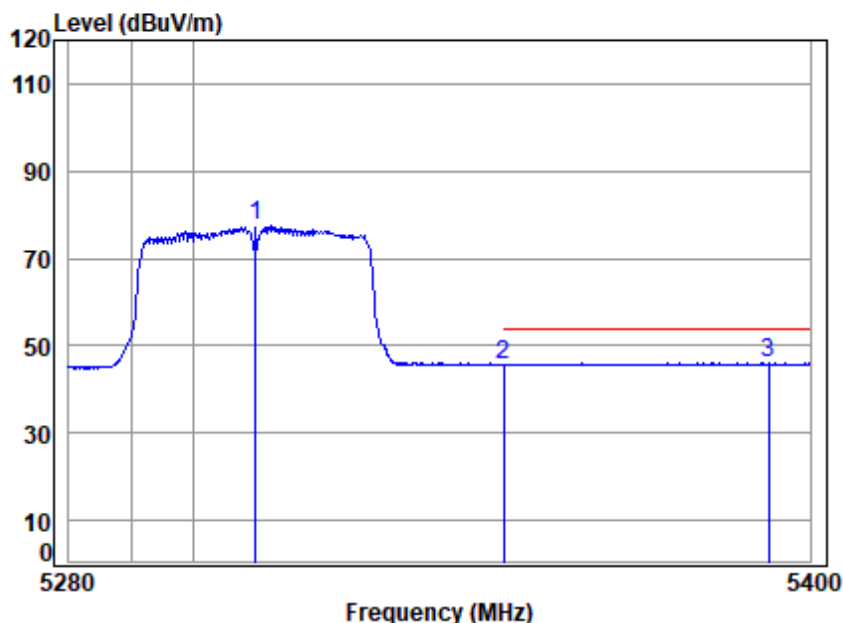

Condition: 3m HORIZONTAL


Job No : 01820MO

Mode : 5310 Band edge  
: 5G Wi-Fi 11n40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5310.000	10.31	32.72	30.78	65.23	77.48	-----	----- Average
2 5350.020	10.45	32.80	30.76	33.13	45.62	54.00	-8.38 Average
3 pp 5393.208	10.60	32.80	30.74	33.30	45.96	54.00	-8.04 Average



Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

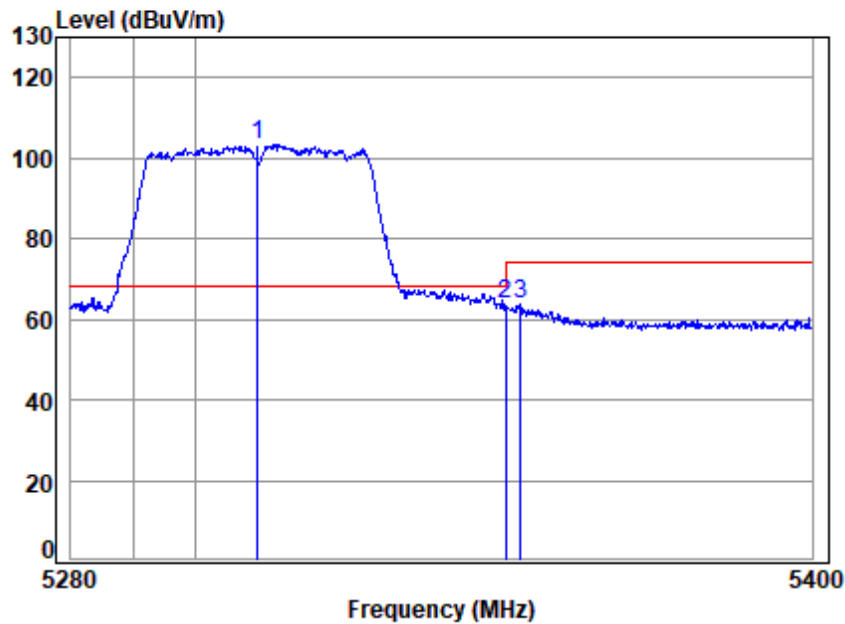

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5310 Band edge  
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5310.000	10.31	32.72	30.78	91.28	103.53	68.20	35.33	Peak
2	5350.020	10.45	32.80	30.76	51.46	63.95	74.00	-10.05	Peak
3	5352.518	10.46	32.80	30.76	51.38	63.88	74.00	-10.12	Peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

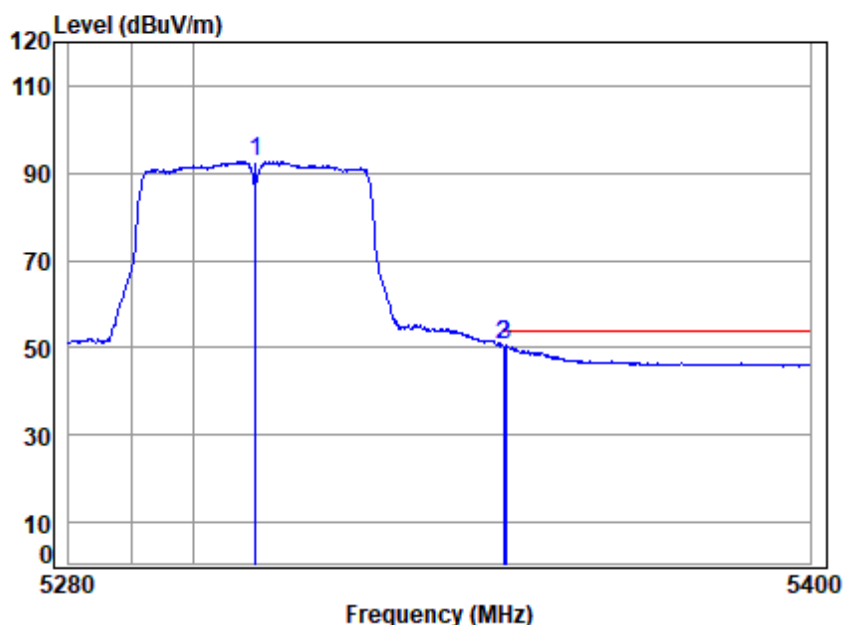

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5310 Band edge

: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5310.000	10.31	32.72	30.78	80.41	92.66	-----	-----	Average
2	5350.020	10.45	32.80	30.76	38.14	50.63	54.00	-3.37	Average
3	pp 5350.474	10.45	32.80	30.76	38.25	50.74	54.00	-3.26	Average



Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

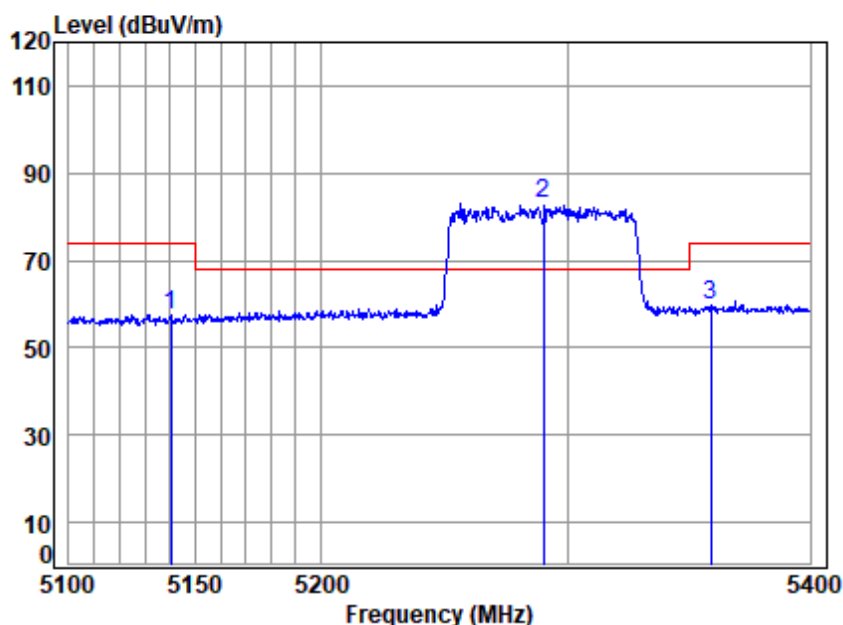

Condition: 3m HORIZONTAL

Job No : 01820MO

Mode : 5290 Band edge


: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5140.387	10.10	32.38	30.84	46.02	57.66	74.00	-16.34	peak
2 pp	5290.000	10.28	32.68	30.78	70.81	82.99	68.20	14.79	peak
3	5358.798	10.48	32.80	30.76	47.33	59.85	74.00	-14.15	peak





Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

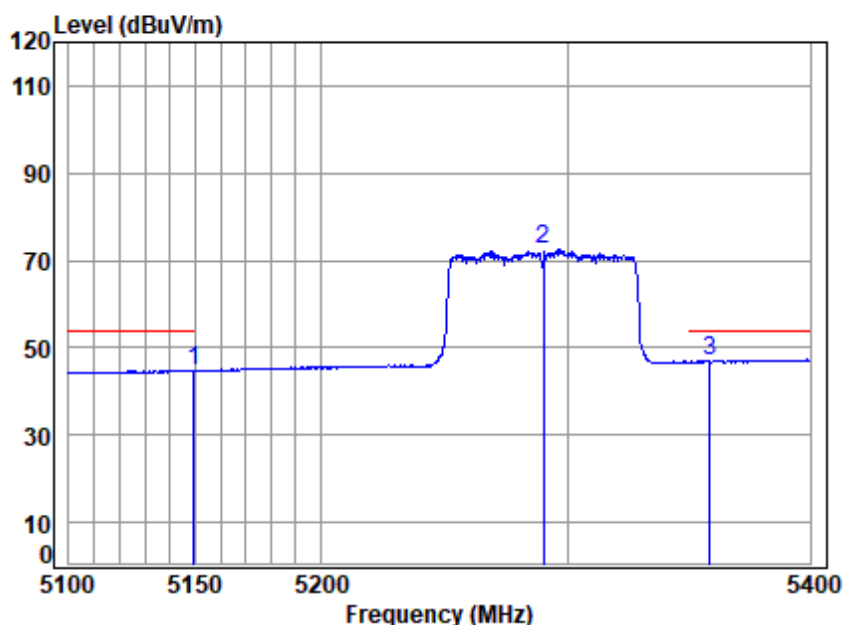

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5290 Band edge

: 5G Wi-Fi 11ac80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5149.503	10.14	32.40	30.84	33.16	44.86	54.00	-9.14 Average
2 5290.000	10.28	32.68	30.78	60.29	72.47	-----	----- Average
3 pp 5358.492	10.48	32.80	30.76	34.45	46.97	54.00	-7.03 Average



Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

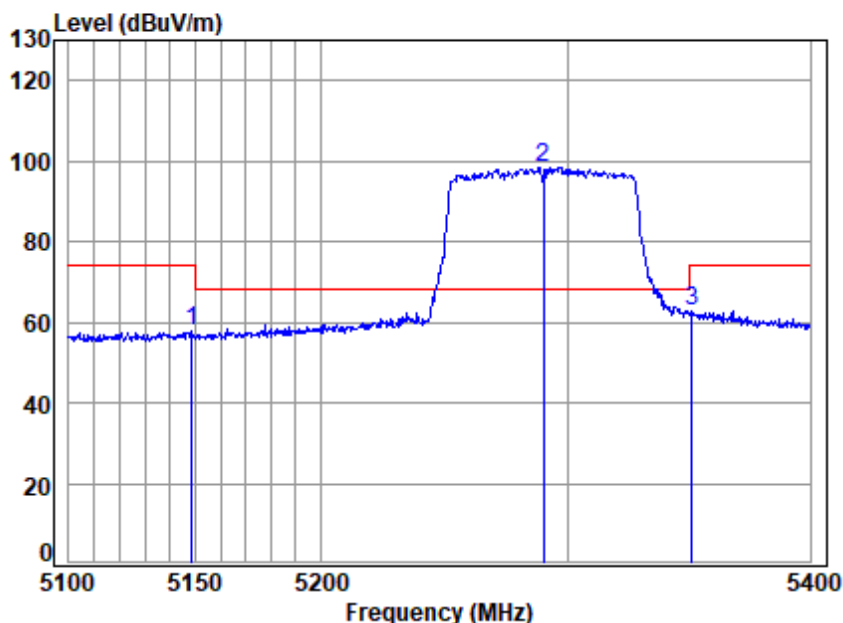

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5290 Band edge

: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.621	10.13	32.40	30.84	46.12	57.81	74.00	-16.19	Peak
2 pp	5290.000	10.28	32.68	30.78	86.21	98.39	68.20	30.19	Peak
3	5350.840	10.45	32.80	30.76	50.06	62.55	74.00	-11.45	Peak



Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

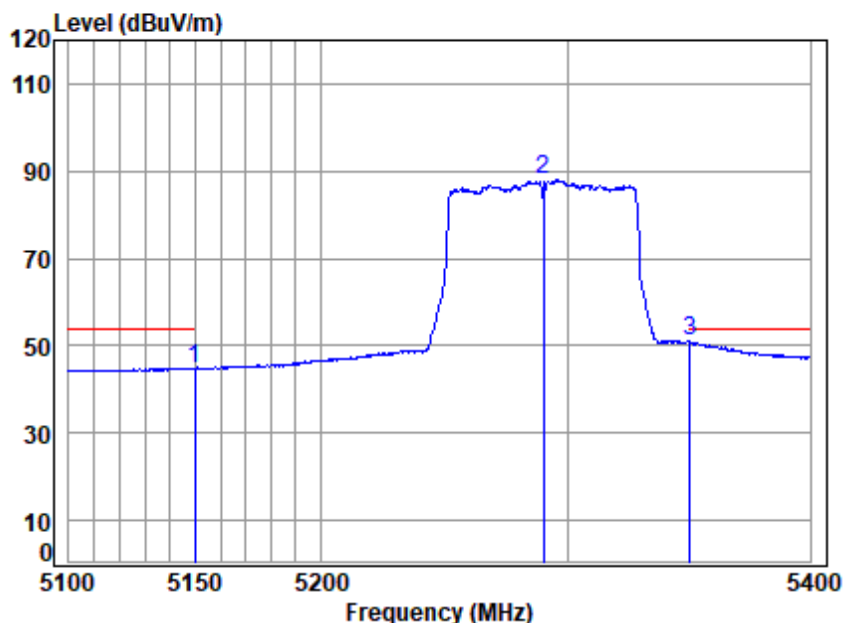

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5290 Band edge

: 5G Wi-Fi 11ac80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5149.798	10.14	32.40	30.84	33.08	44.78	54.00	-9.22 Average
2 5290.000	10.28	32.68	30.78	75.81	87.99	-----	----- Average
3 pp 5350.229	10.45	32.80	30.76	38.50	50.99	54.00	-3.01 Average



Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

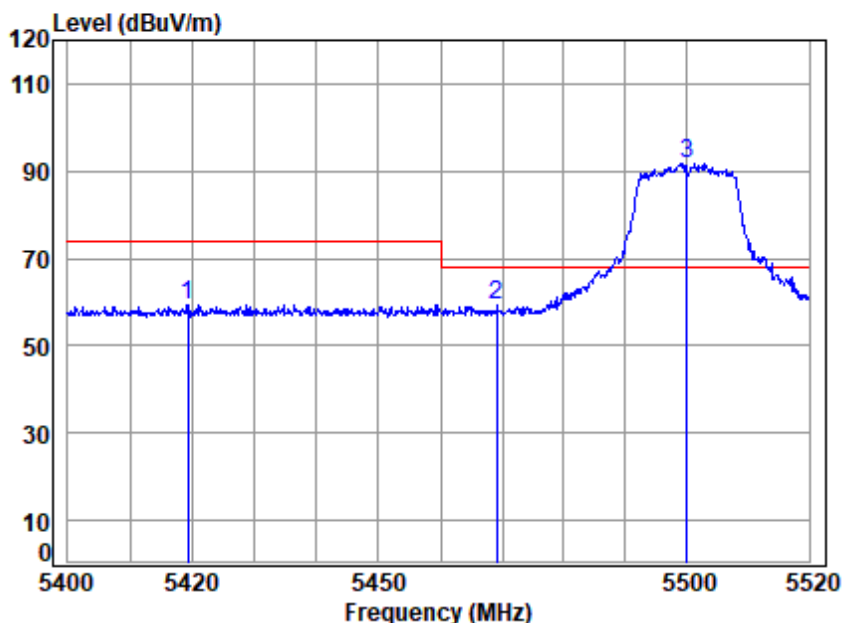

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5500 Band edge  
: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5419.261	10.61	32.84	30.73	46.76	59.48	74.00 -14.52 peak
2	5469.158	10.59	32.90	30.71	46.31	59.09	68.20 -9.11 peak
3	pp 5500.000	10.58	32.90	30.70	79.10	91.88	68.20 23.68 peak





Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

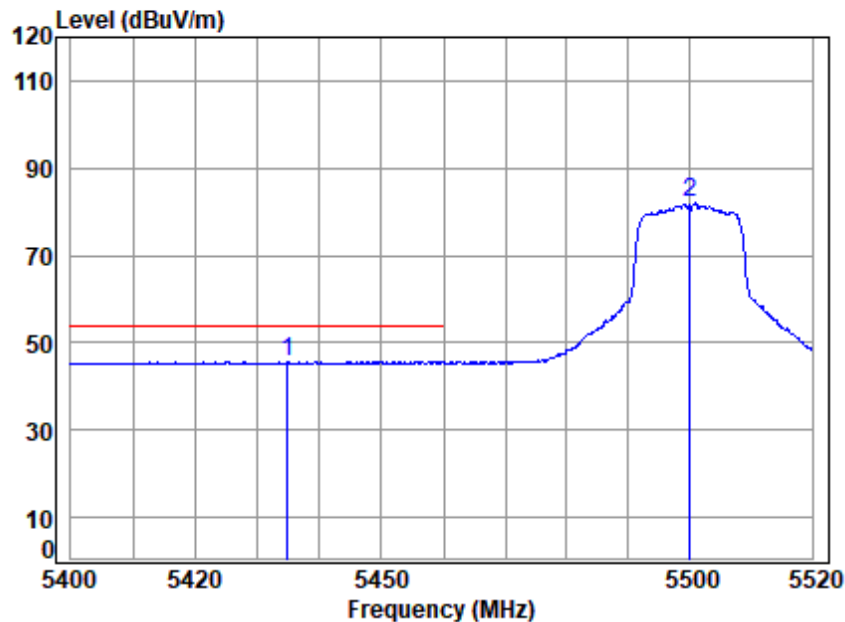

Condition: 3m HORIZONTAL


Job No : 01820MO

Mode : 5500 Band edge  
: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5434.768	10.61	32.87	30.73	32.84	45.59	54.00	-8.41	Average
2	5500.000	10.58	32.90	30.70	69.15	81.93	-----	-----	Average



Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

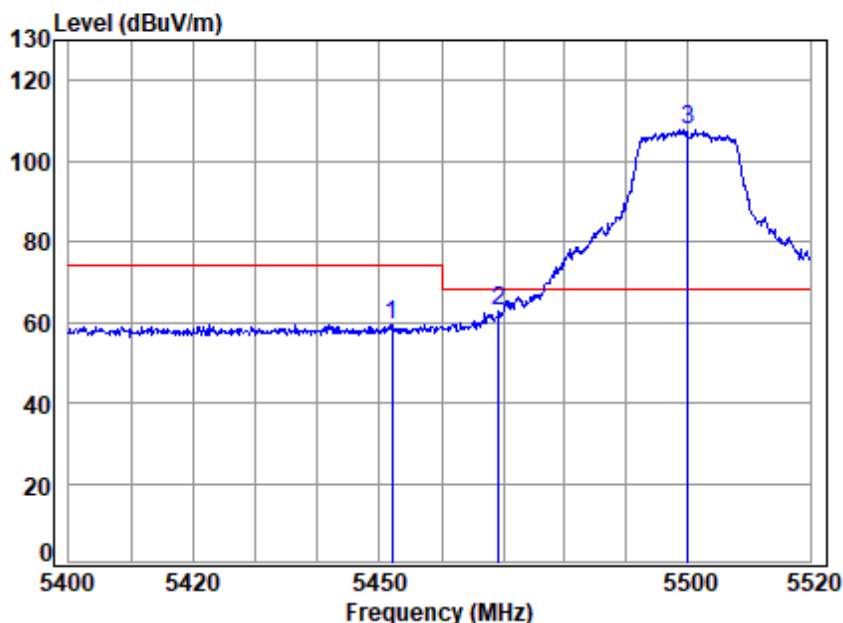

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5500 Band edge  
: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5451.996	10.60	32.90	30.72	46.55	59.33	74.00	-14.67	Peak
2	5469.279	10.59	32.90	30.71	50.00	62.78	68.20	-5.42	peak
3	pp 5500.000	10.58	32.90	30.70	94.90	107.68	68.20	39.48	Peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

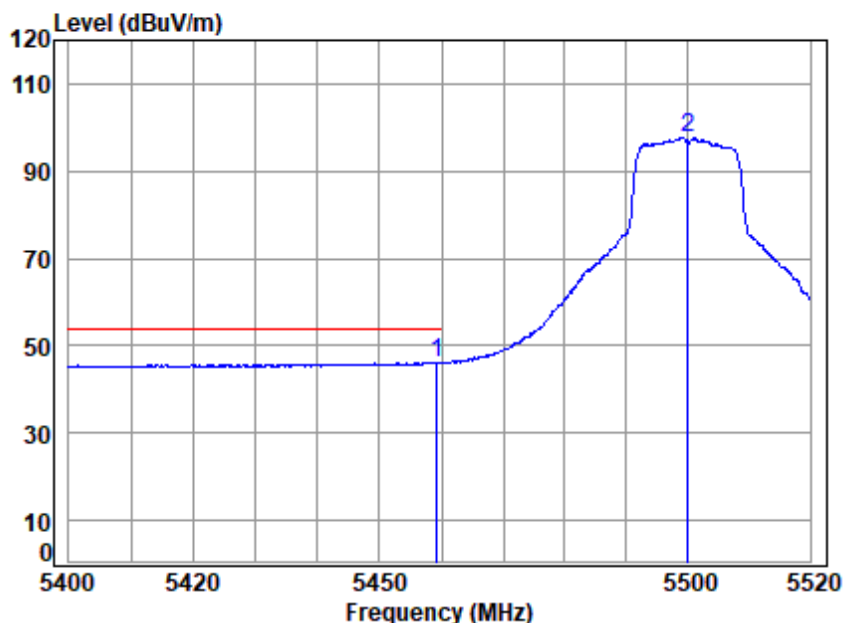

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5500 Band edge

: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5459.311	10.60	32.90	30.72	33.38	46.16	54.00	-7.84	Average
2	5500.000	10.58	32.90	30.70	85.01	97.79	-----	-----	Average



Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

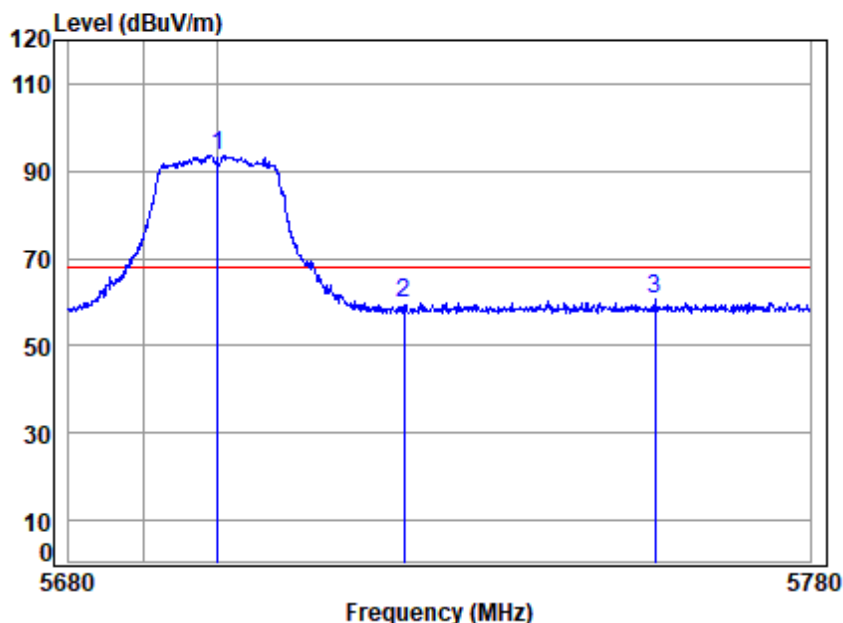

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5700 Band edge  
: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	10.56	33.20	30.62	80.45	93.59	68.20	25.39	peak
2	5725.000	10.68	33.25	30.61	46.23	59.55	68.20	-8.65	peak
3	5758.956	10.83	33.32	30.60	47.11	60.66	68.20	-7.54	peak





Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

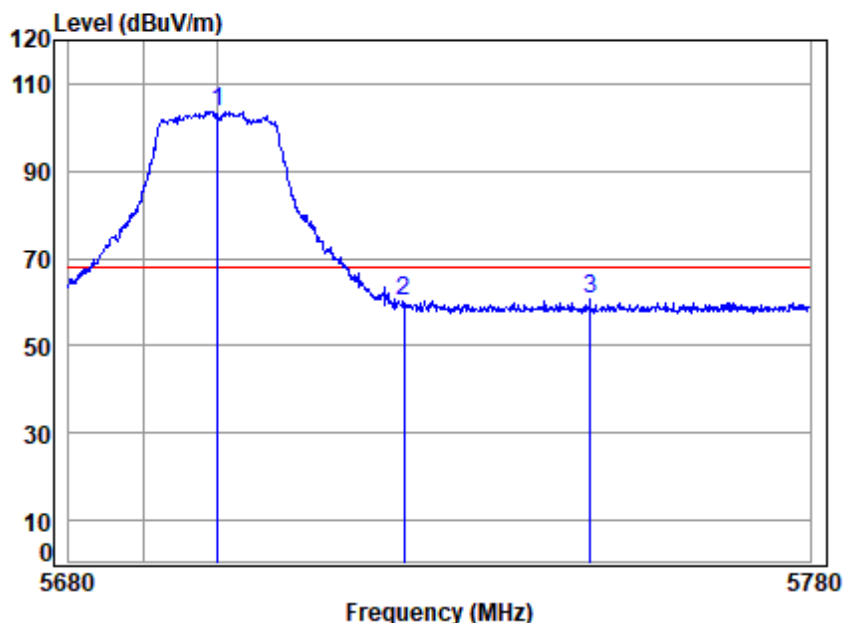

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5700 Band edge  
: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	10.56	33.20	30.62	90.53	103.67	68.20	35.47	Peak
2	5725.000	10.68	33.25	30.61	46.90	60.22	68.20	-7.98	Peak
3	5750.118	10.79	33.30	30.60	47.19	60.68	68.20	-7.52	Peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

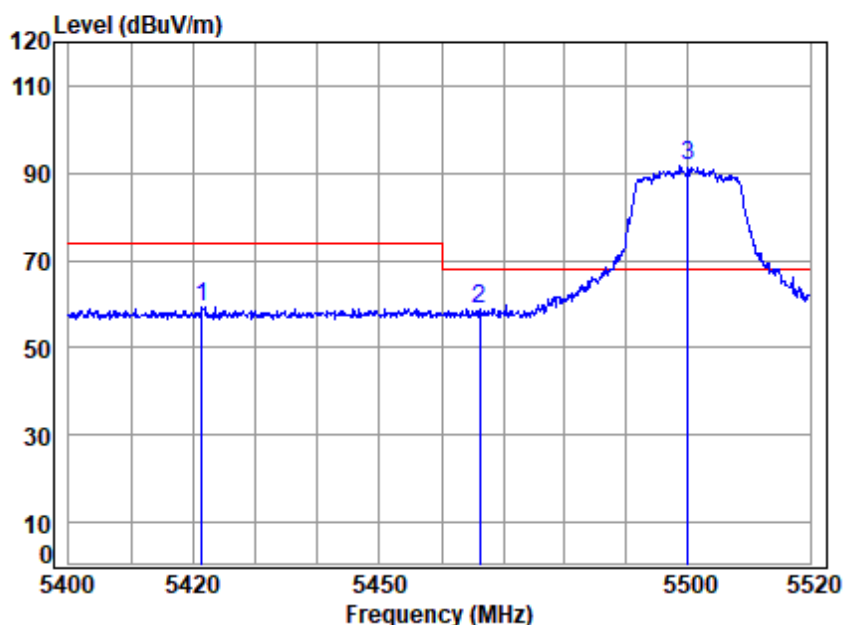

Condition: 3m HORIZONTAL


Job No : 01820MO

Mode : 5500 Band edge  
: 5G Wi-Fi 11n20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5421.287	10.61	32.84	30.73	46.52	59.24	74.00	-14.76	peak
2 5466.274	10.59	32.90	30.71	46.10	58.88	68.20	-9.32	peak
3 pp 5500.000	10.58	32.90	30.70	78.89	91.67	68.20	23.47	peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

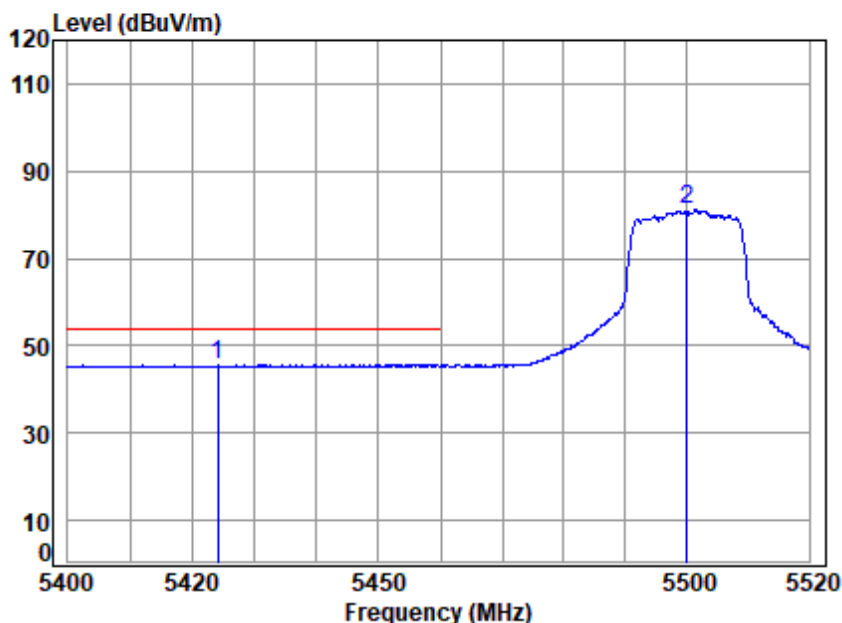

Condition: 3m HORIZONTAL


Job No : 01820MO

Mode : 5500 Band edge  
: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5424.147	10.61	32.85	30.73	32.96	45.69	54.00	-8.31	Average
2	5500.000	10.58	32.90	30.70	68.24	81.02	-----	-----	Average



Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

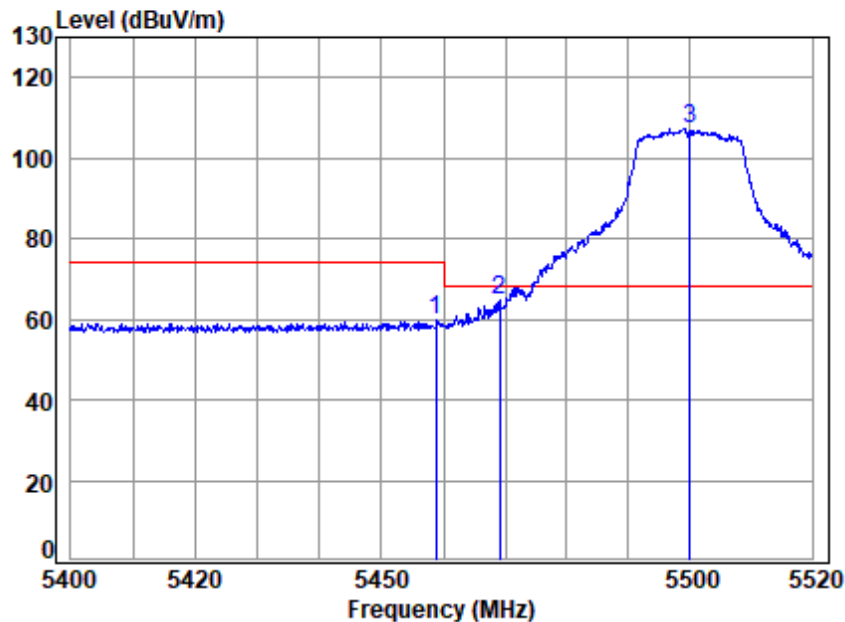

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5500 Band edge  
: 5G Wi-Fi 11n20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5458.831	10.60	32.90	30.72	46.80	59.58	74.00	-14.42 Peak
2	5469.038	10.59	32.90	30.71	52.02	64.80	68.20	-3.40 peak
3	pp 5500.000	10.58	32.90	30.70	94.53	107.31	68.20	39.11 Peak





Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

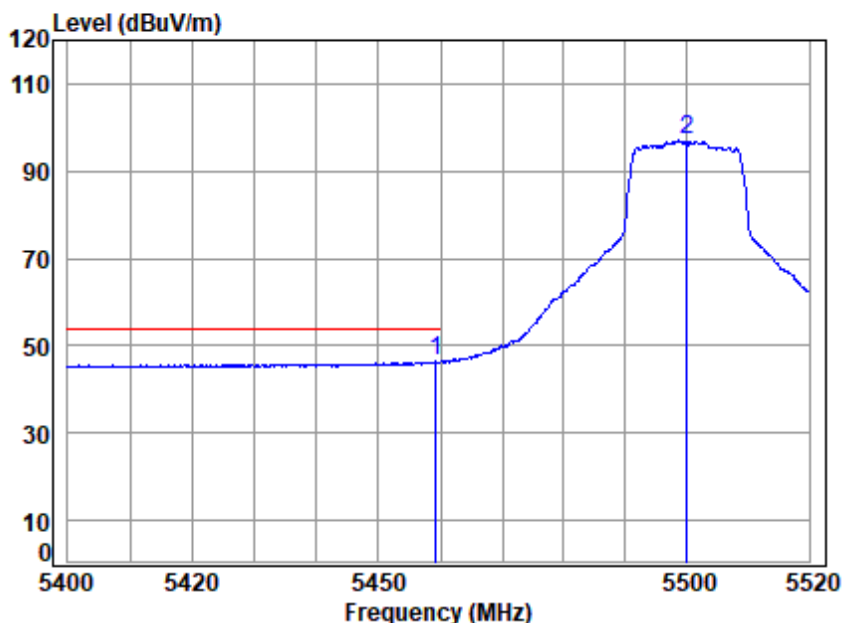

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5500 Band edge  
: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5459.190	10.60	32.90	30.72	33.60	46.38	54.00	-7.62	Average
2 5500.000	10.58	32.90	30.70	84.30	97.08	-----	-----	Average



Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

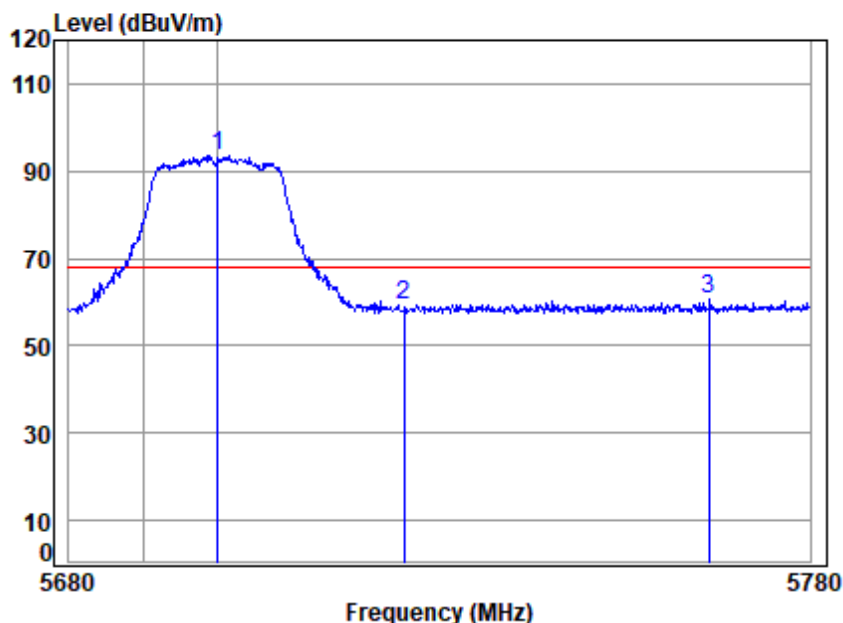

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5700 Band edge

: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	10.56	33.20	30.62	80.26	93.40	68.20	25.20	peak
2	5725.000	10.68	33.25	30.61	45.83	59.15	68.20	-9.05	peak
3	5766.297	10.86	33.33	30.59	46.87	60.47	68.20	-7.73	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

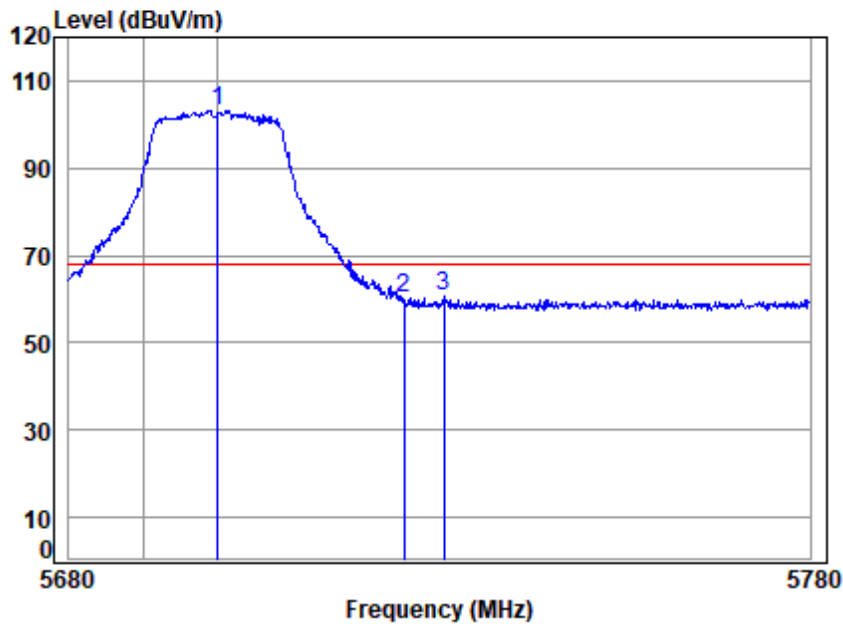

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5700 Band edge  
: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	10.56	33.20	30.62	90.12	103.26	68.20	35.06	Peak
2	5725.000	10.68	33.25	30.61	46.73	60.05	68.20	-8.15	Peak
3	5730.382	10.70	33.26	30.61	47.21	60.56	68.20	-7.64	Peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

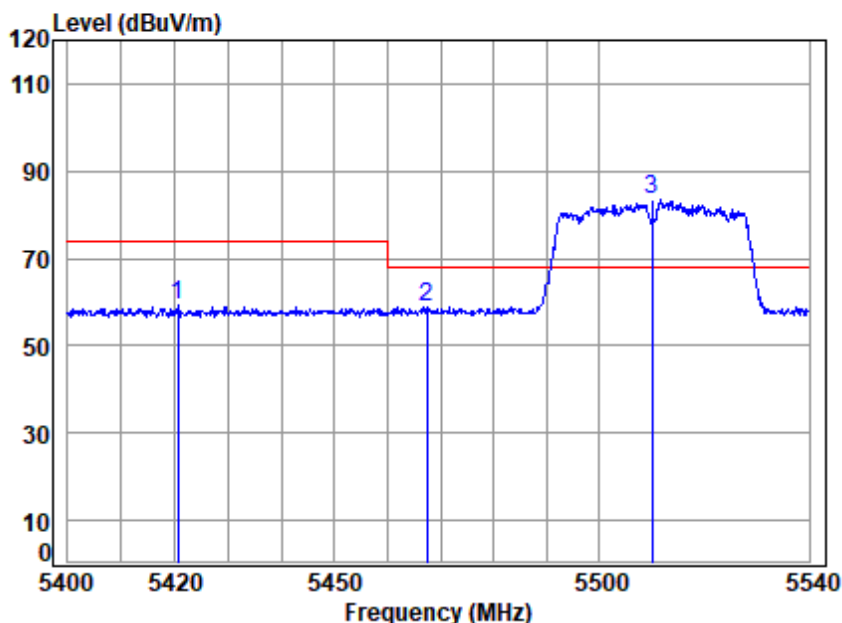

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5510 Band edge  
: 5G Wi-Fi 11n40

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5420.495	10.61	32.84	30.73	46.42	59.14	74.00	-14.86 peak
2	5467.313	10.59	32.90	30.71	46.30	59.08	68.20	-9.12 peak
3	pp 5510.000	10.56	32.90	30.70	70.68	83.44	68.20	15.24 peak





Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

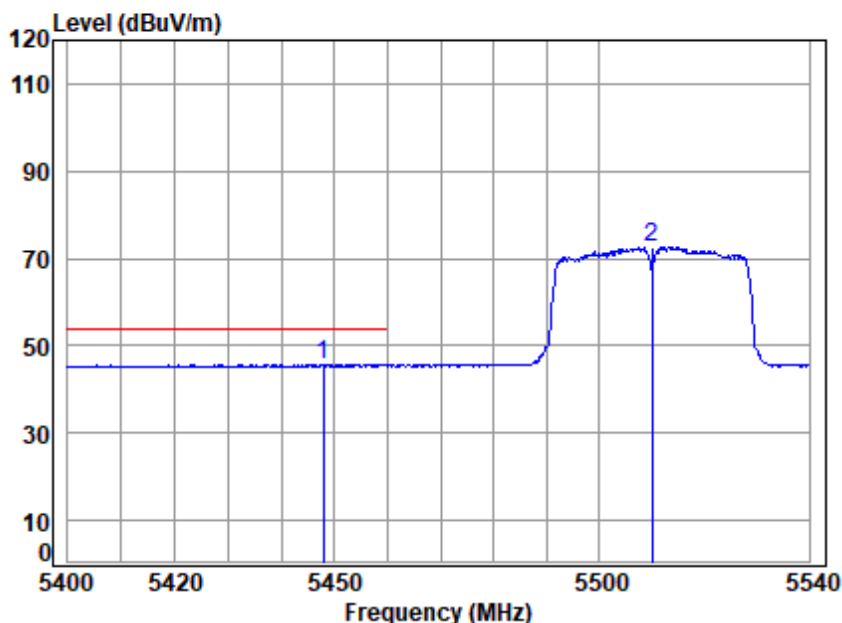

Condition: 3m HORIZONTAL


Job No : 01820MO

Mode : 5510 Band edge  
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5447.896	10.60	32.90	30.72	32.93	45.71	54.00	-8.29	Average
2 5510.000	10.56	32.90	30.70	59.91	72.67	-----	-----	Average



Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

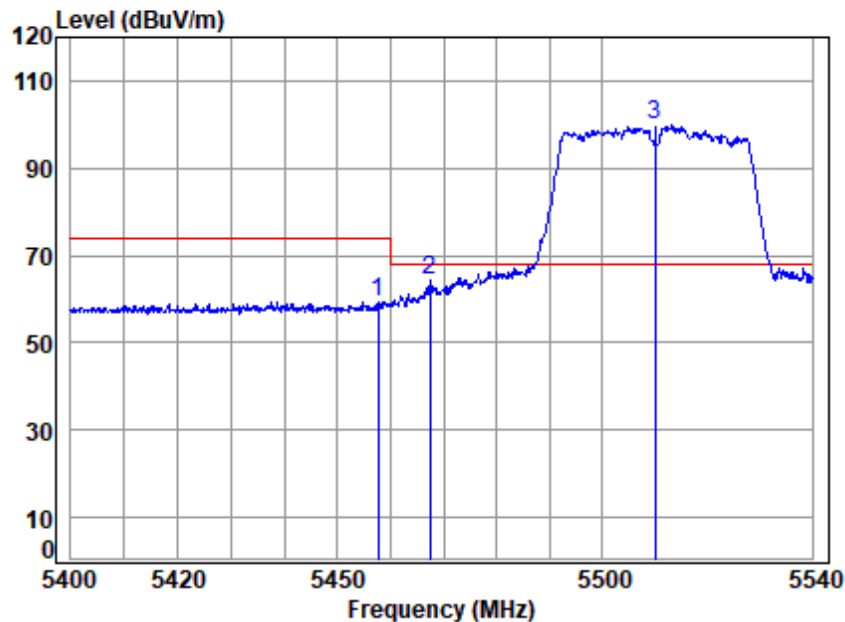

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5510 Band edge  
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5457.666	10.60	32.90	30.72	46.59	59.37	74.00	-14.63 Peak
2	5467.313	10.59	32.90	30.71	51.45	64.23	68.20	-3.97 Peak
3 pp	5510.000	10.56	32.90	30.70	87.04	99.80	68.20	31.60 Peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

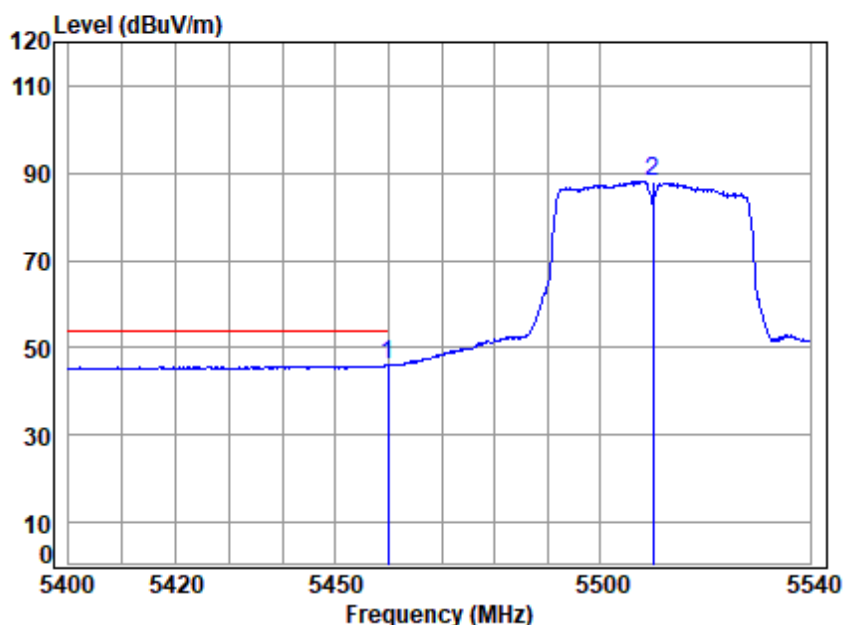

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5510 Band edge

: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5459.901	10.60	32.90	30.72	33.28	46.06	54.00	-7.94	Average
2 5510.000	10.56	32.90	30.70	75.23	87.99	-----	-----	Average



Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

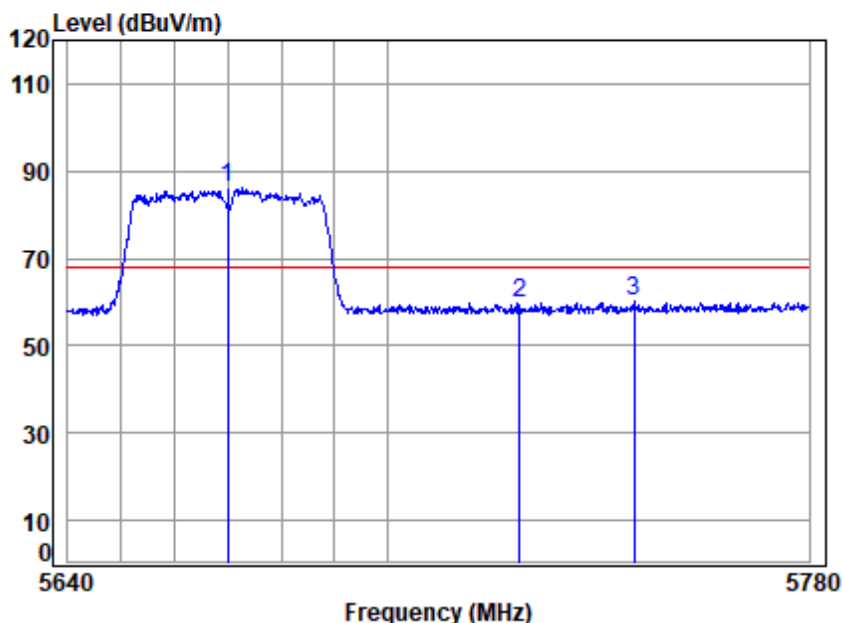

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5670 Band edge  
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5670.000	10.52	33.14	30.63	73.21	86.24	68.20	18.04	peak
2	5725.000	10.68	33.25	30.61	46.28	59.60	68.20	-8.60	peak
3	5746.650	10.77	33.29	30.60	46.59	60.05	68.20	-8.15	peak





Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

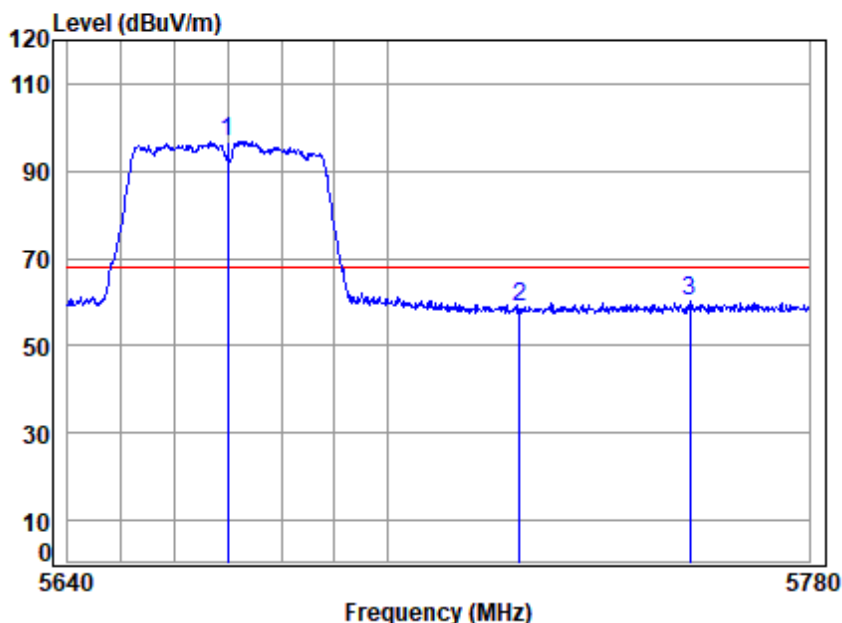

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5670 Band edge  
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5670.000	10.52	33.14	30.63	83.83	96.86	68.20	28.66	Peak
2	5725.000	10.68	33.25	30.61	45.75	59.07	68.20	-9.13	Peak
3	5757.228	10.82	33.31	30.60	46.84	60.37	68.20	-7.83	Peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

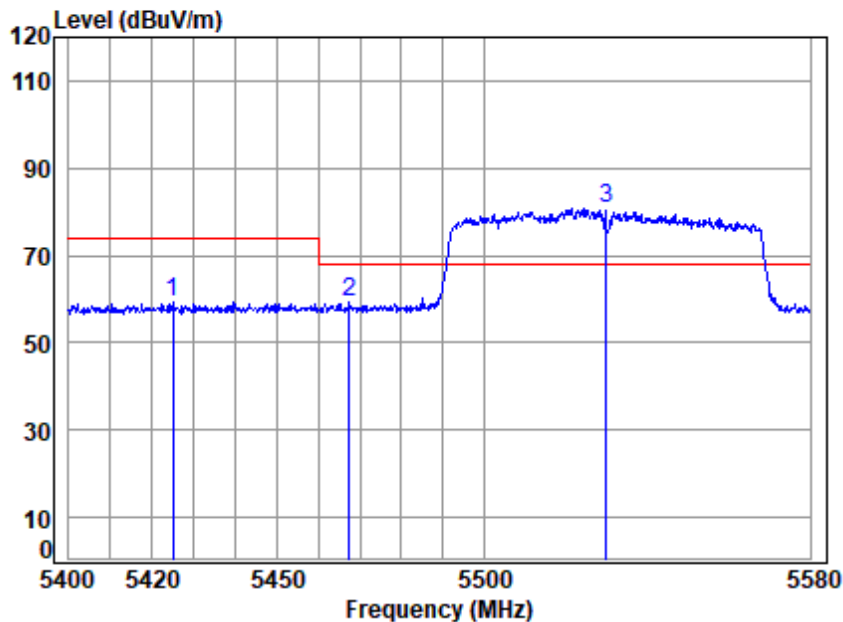

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5530 Band edge

: 5G Wi-Fi 11ac80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5424.846	10.61	32.85	30.73	46.59	59.32	74.00 -14.68 peak
2	5467.347	10.59	32.90	30.71	46.33	59.11	68.20 -9.09 peak
3	pp 5530.000	10.53	32.90	30.69	68.22	80.96	68.20 12.76 peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

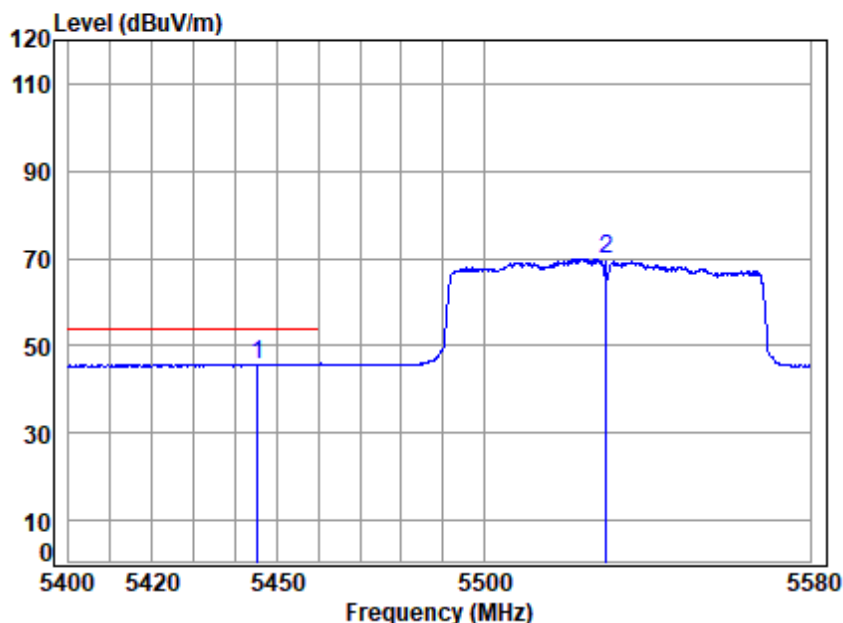

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5530 Band edge

: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5445.341	10.60	32.89	30.72	33.02	45.79	54.00	-8.21	Average
2 5530.000	10.53	32.90	30.69	57.28	70.02	-----	-----	Average



Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

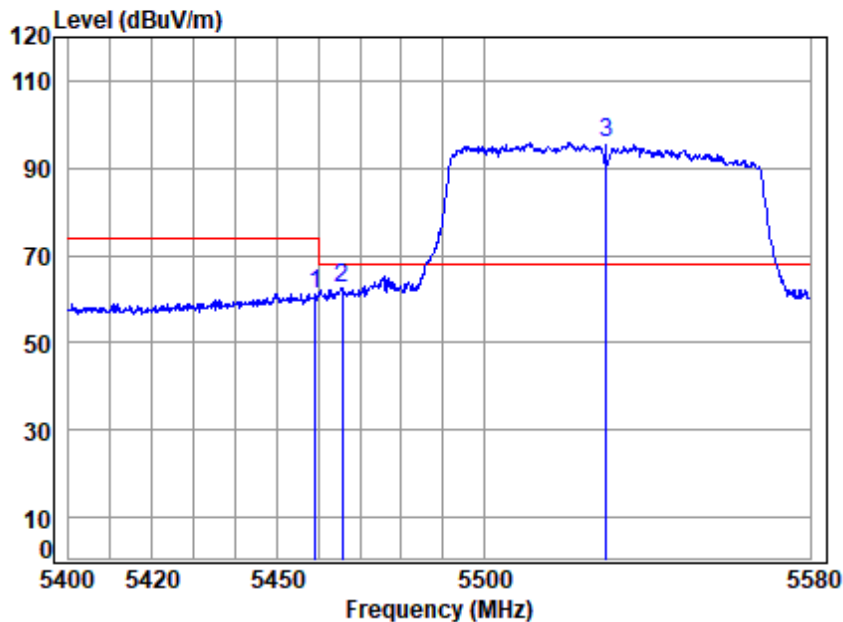

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5530 Band edge  
: 5G Wi-Fi 11ac80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5459.286	10.60	32.90	30.72	48.53	61.31	74.00 -12.69 Peak
2	5465.734	10.59	32.90	30.71	49.69	62.47	68.20 -5.73 peak
3	pp 5530.000	10.53	32.90	30.69	83.03	95.77	68.20 27.57 Peak





Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

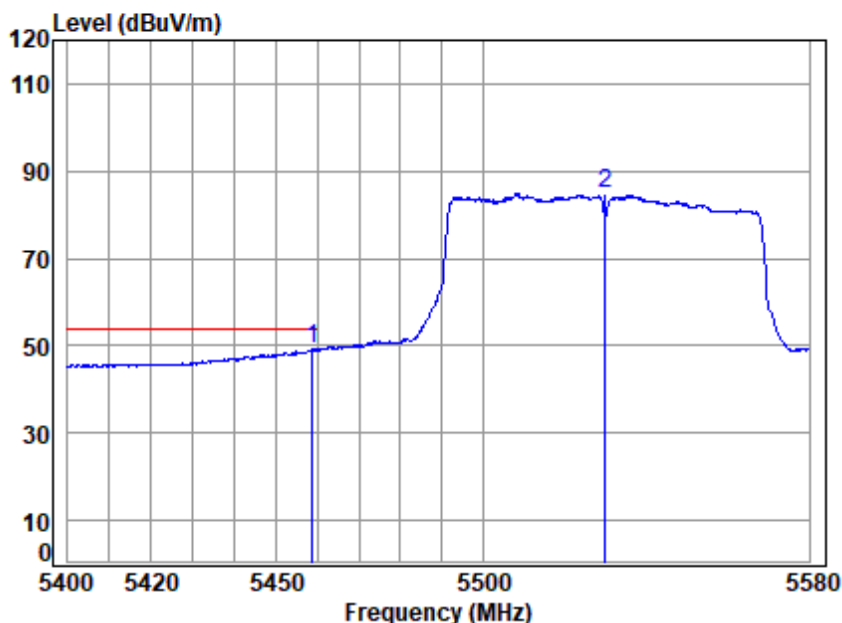

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5530 Band edge

: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5458.749	10.60	32.90	30.72	36.52	49.30	54.00	-4.70	Average
2 5530.000	10.53	32.90	30.69	72.01	84.75	-----	-----	Average



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

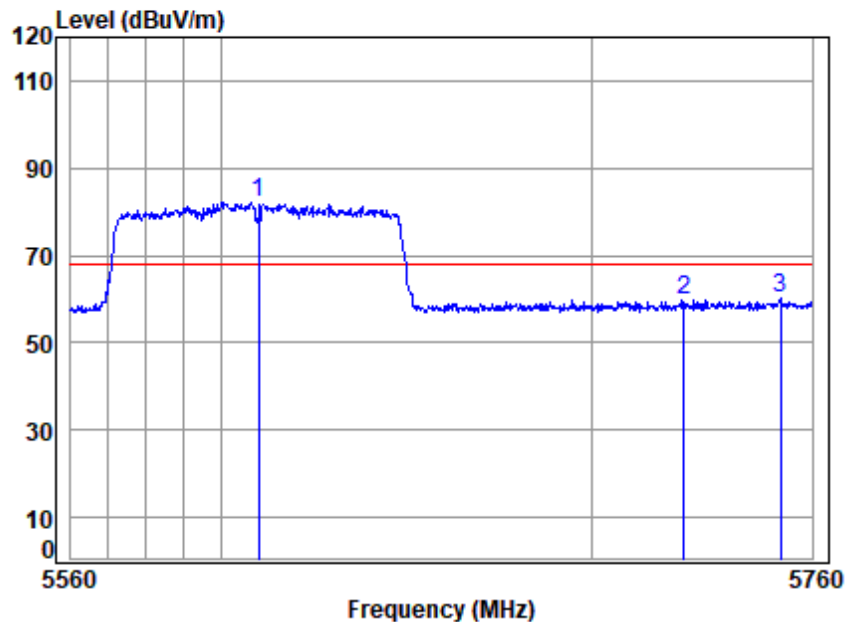

Condition: 3m HORIZONTAL


Job No : 01820MO

Mode : 5610 Band edge  
: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5610.000	10.43	33.02	30.66	69.38	82.17	68.20	13.97	peak
2	5725.000	10.68	33.25	30.61	46.39	59.71	68.20	-8.49	peak
3	5751.457	10.80	33.30	30.60	46.93	60.43	68.20	-7.77	peak



Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

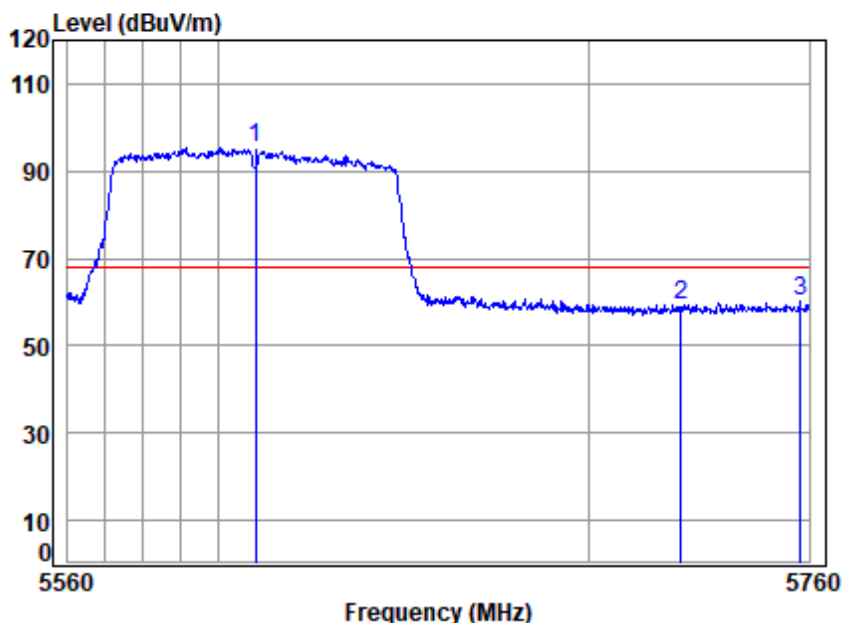

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5610 Band edge  
: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5610.000	10.43	33.02	30.66	82.61	95.40	68.20	27.20	Peak
2	5725.000	10.68	33.25	30.61	46.08	59.40	68.20	-8.80	peak
3	5757.558	10.82	33.32	30.60	46.72	60.26	68.20	-7.94	Peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

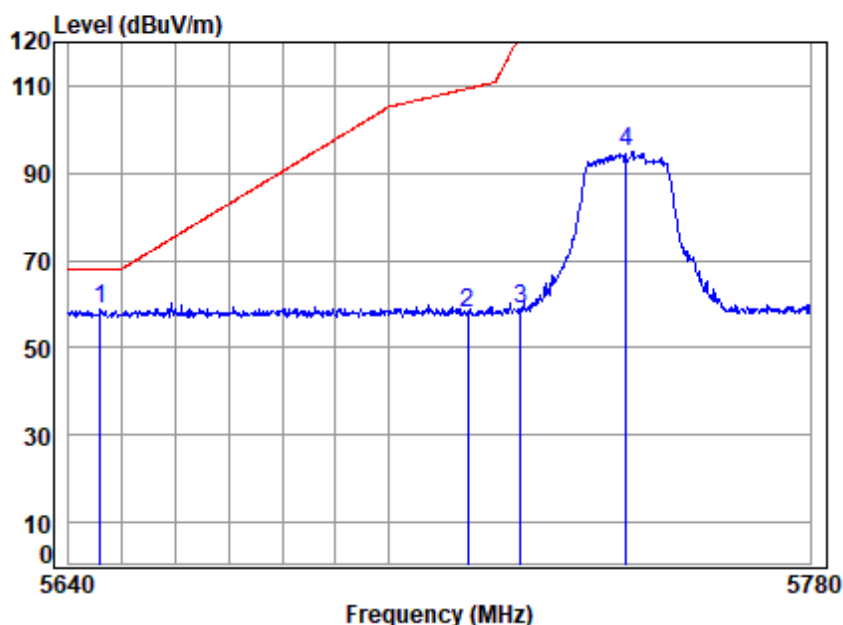

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5745 Band edge  
: 5.8G Wi-Fi 11a

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5645.811	10.48	33.09	30.64	45.83	58.76	68.20	-9.44 peak
2	5715.000	10.63	33.23	30.61	44.86	58.11	109.40	-51.29 peak
3	5725.000	10.68	33.25	30.61	45.58	58.90	122.20	-63.30 peak
4	5745.000	10.77	33.29	30.60	81.27	94.73	-----	----- peak





Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

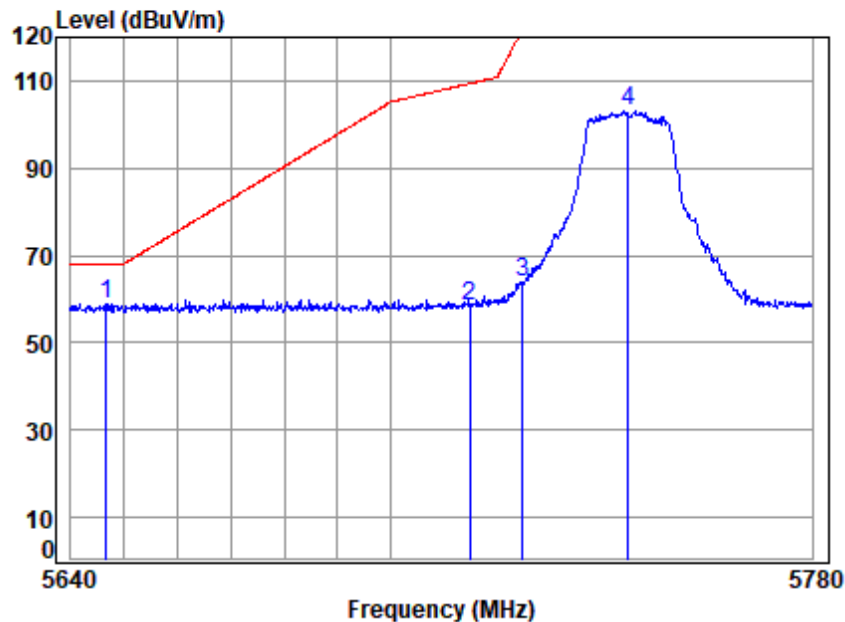

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5745 Band edge  
: 5.8G Wi-Fi 11a

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5646.642	10.48	33.09	30.64	45.91	58.84	68.20	-9.36 peak
2	5715.000	10.63	33.23	30.61	45.36	58.61	109.40	-50.79 peak
3	5725.000	10.68	33.25	30.61	50.58	63.90	122.20	-58.30 peak
4	5745.000	10.77	33.29	30.60	89.83	103.29	-----	----- peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

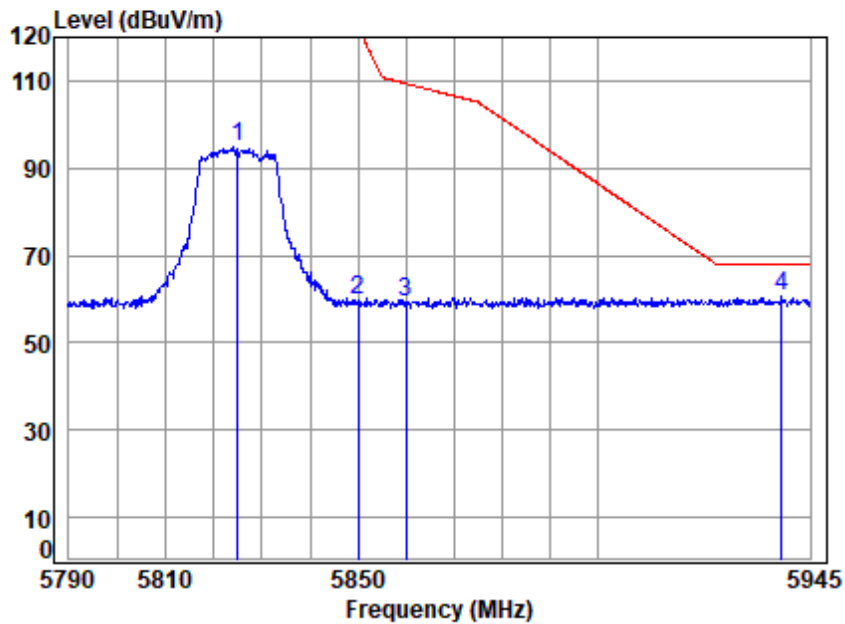

Condition: 3m HORIZONTAL


Job No : 01820MO

Mode : 5825 Band edge  
: 5.8G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5825.000	10.99	33.50	30.57	81.05	94.97	-----	----- peak
2 5850.000	10.95	33.60	30.56	45.65	59.64	122.20	-62.56 peak
3 5860.000	10.94	33.58	30.56	45.33	59.29	109.40	-50.11 peak
4 pp 5939.035	10.86	33.58	30.52	46.75	60.67	68.20	-7.53 peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

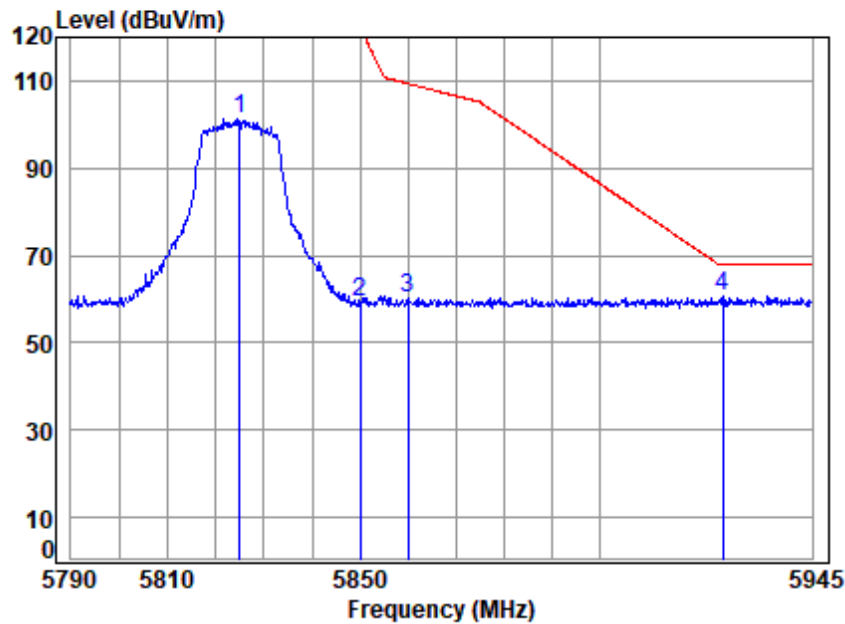

Condition: 3m VERTICAL


Job No : 01820MO

Mode : 5825 Band edge  
: 5.8G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	10.99	33.50	30.57	87.18	101.10	-----	-----	peak
2	5850.000	10.95	33.60	30.56	45.45	59.44	122.20	-62.76	peak
3	5860.000	10.94	33.58	30.56	46.22	60.18	109.40	-49.22	peak
4 pp	5926.183	10.87	33.55	30.53	46.90	60.79	68.20	-7.41	peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

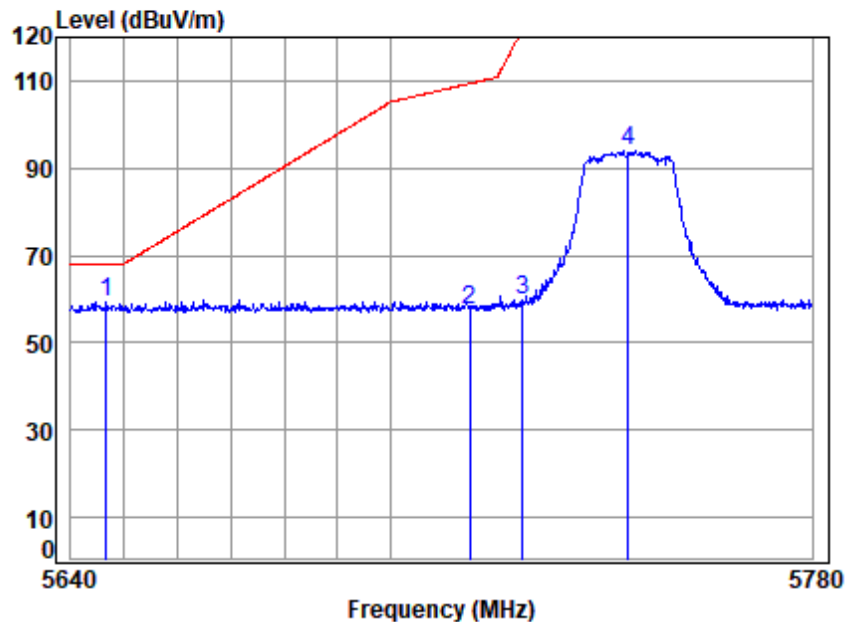

Condition: 3m HORIZONTAL

Job No : 01820MO

Mode : 5745 Band edge


: 5.8G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5646.642	10.48	33.09	30.64	46.51	59.44	68.20	-8.76	peak
2	5715.000	10.63	33.23	30.61	44.39	57.64	109.40	-51.76	peak
3	5725.000	10.68	33.25	30.61	46.43	59.75	122.20	-62.45	peak
4	5745.000	10.77	33.29	30.60	80.68	94.14	-----	-----	peak





Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

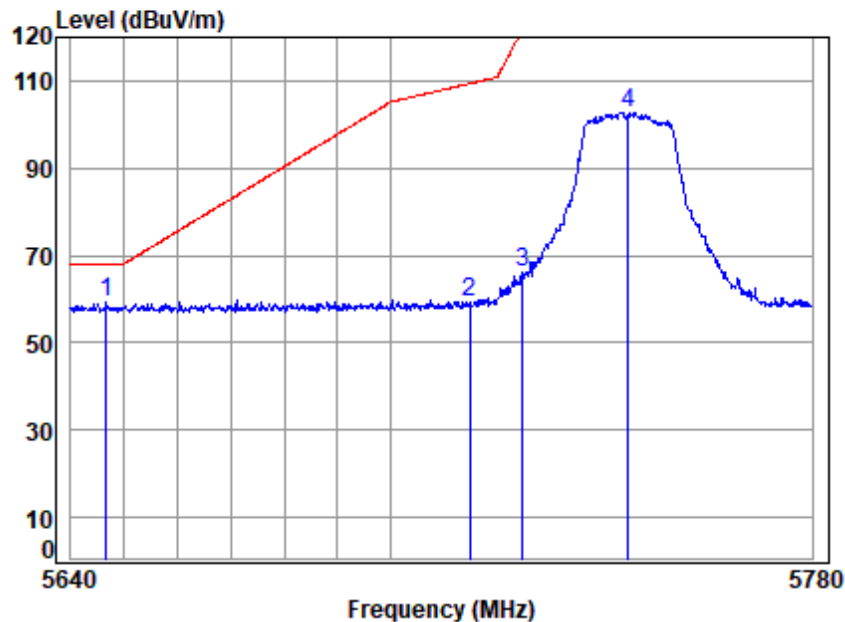

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5745 Band edge

: 5.8G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5646.642	10.48	33.09	30.64	46.41	59.34	68.20	-8.86	peak
2	5715.000	10.63	33.23	30.61	46.23	59.48	109.40	-49.92	peak
3	5725.000	10.68	33.25	30.61	52.76	66.08	122.20	-56.12	peak
4	5745.000	10.77	33.29	30.60	89.36	102.82	-----	-----	peak



Test Mode: 08; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 20MHz; Channel: High

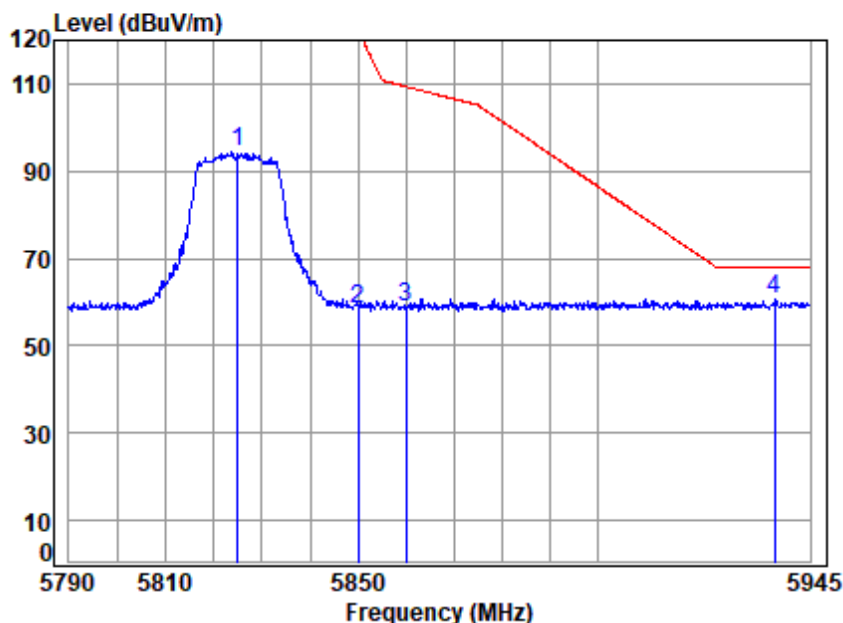

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5825 Band edge

: 5.8G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	10.99	33.50	30.57	80.42	94.34	-----	-----	peak
2	5850.000	10.95	33.60	30.56	44.63	58.62	122.20	-63.58	peak
3	5860.000	10.94	33.58	30.56	44.96	58.92	109.40	-50.48	peak
4 pp	5937.466	10.86	33.57	30.53	46.62	60.52	68.20	-7.68	peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

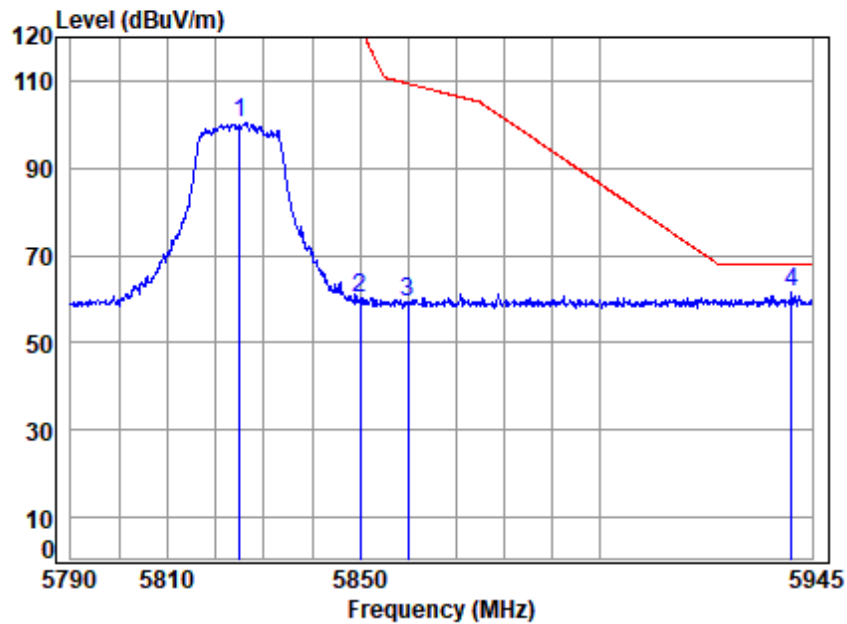

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5825 Band edge

: 5.8G Wi-Fi 11n20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5825.000	10.99	33.50	30.57	86.49	100.41	-----	----- peak
2 5850.000	10.95	33.60	30.56	46.06	60.05	122.20	-62.15 peak
3 5860.000	10.94	33.58	30.56	45.40	59.36	109.40	-50.04 peak
4 pp 5940.604	10.86	33.58	30.52	47.61	61.53	68.20	-6.67 peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

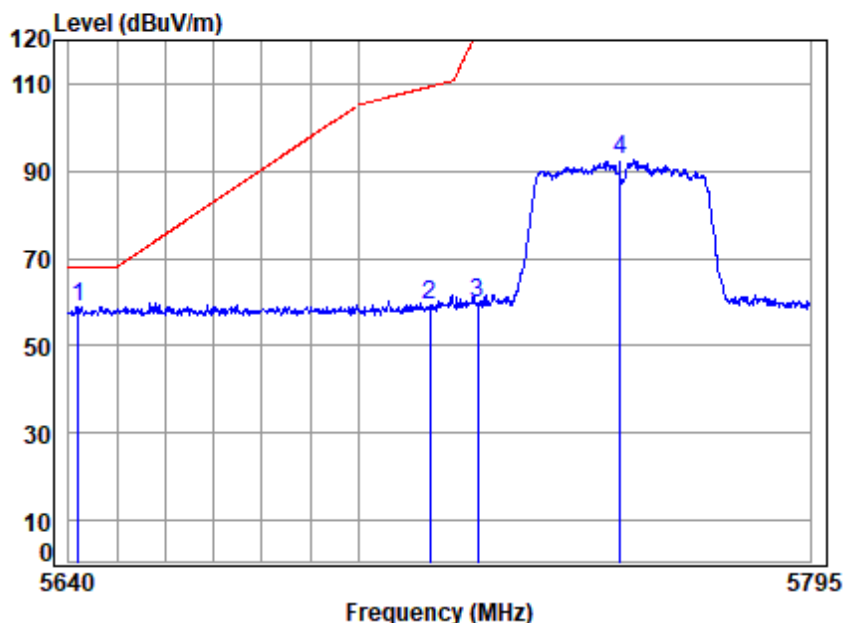

Condition: 3m HORIZONTAL

Job No : 01820MO

Mode : 5755 Band edge


: 5.8G Wi-Fi 11n40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5641.988	10.47	33.08	30.64	46.17	59.08	68.20	-9.12 peak
2	5715.000	10.63	33.23	30.61	45.91	59.16	109.40	-50.24 peak
3	5725.000	10.68	33.25	30.61	46.27	59.59	122.20	-62.61 peak
4	5755.000	10.81	33.31	30.60	78.92	92.44	-----	----- peak





Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

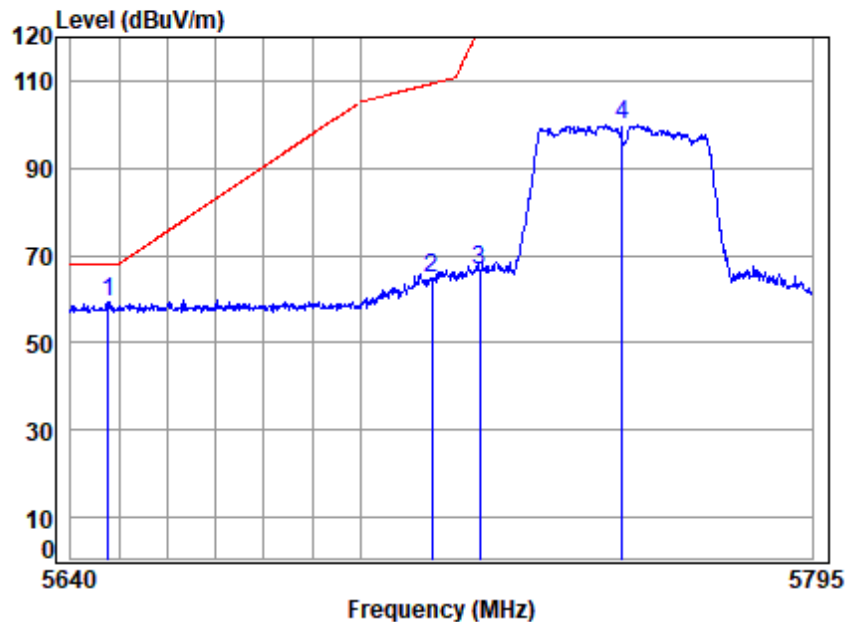

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5755 Band edge

: 5.8G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5647.804	10.48	33.10	30.64	46.53	59.47	68.20	-8.73	peak
2	5715.000	10.63	33.23	30.61	51.53	64.78	109.40	-44.62	peak
3	5725.000	10.68	33.25	30.61	53.35	66.67	122.20	-55.53	peak
4	5755.000	10.81	33.31	30.60	86.50	100.02	-----	-----	peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

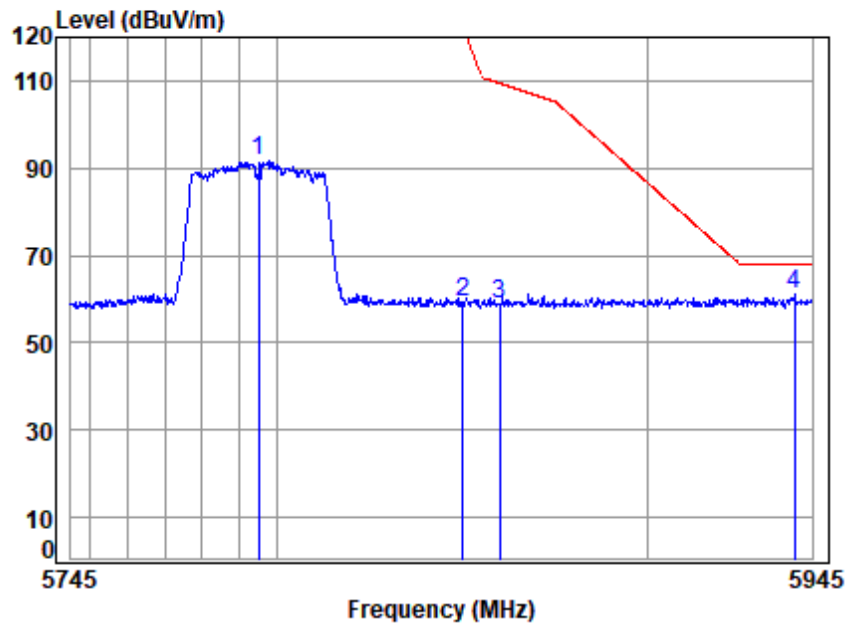

Condition: 3m HORIZONTAL

Job No : 01820MO


Mode : 5795 Band edge

: 5.8G Wi-Fi 11n40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5795.000	11.00	33.39	30.58	77.71	91.52	-----	----- peak
2 5850.000	10.95	33.60	30.56	45.17	59.16	122.20	-63.04 peak
3 5860.000	10.94	33.58	30.56	44.84	58.80	109.40	-50.60 peak
4 pp 5940.120	10.86	33.58	30.52	47.16	61.08	68.20	-7.12 peak



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

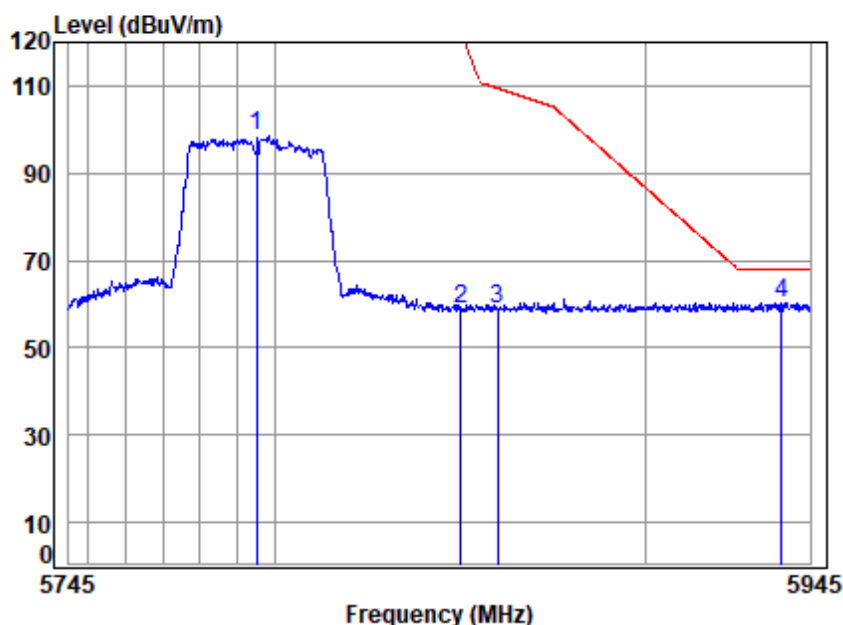

Condition: 3m VERTICAL

Job No : 01820MO


Mode : 5795 Band edge

: 5.8G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5795.000	11.00	33.39	30.58	84.69	98.50	-----	-----	peak
2	5850.000	10.95	33.60	30.56	44.98	58.97	122.20	-63.23	peak
3	5860.000	10.94	33.58	30.56	44.88	58.84	109.40	-50.56	peak
4 pp	5937.274	10.86	33.57	30.53	46.44	60.34	68.20	-7.86	peak



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

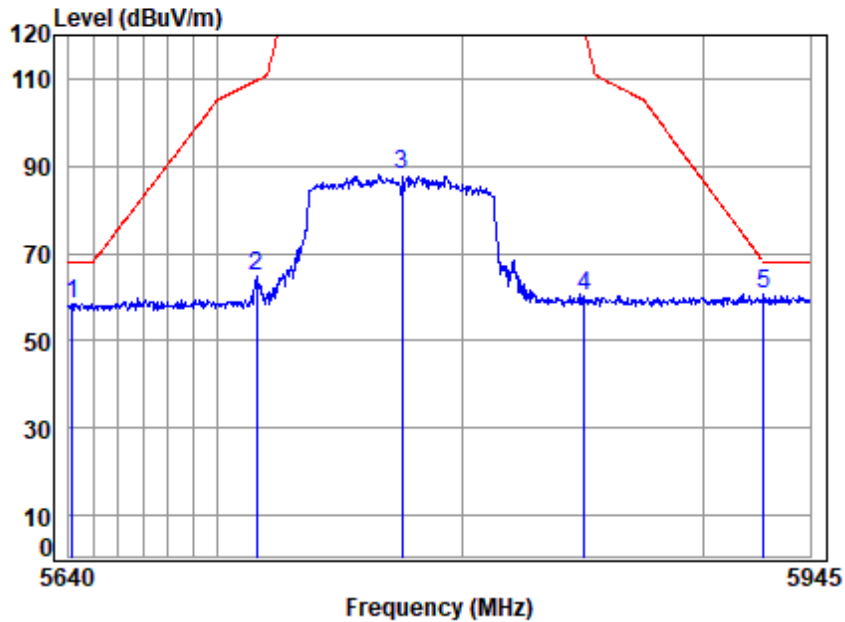

Condition: 3m HORIZONTAL

Job No : 01820MO

Mode : 5775 Band edge


: 5.8G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5641.485	10.47	33.08	30.64	45.53	58.44	68.20	-9.76	Peak
2	5715.654	10.63	33.23	30.61	51.35	64.60	109.58	-44.98	peak
3	5775.000	10.91	33.35	30.59	74.22	87.89	-----	-----	peak
4	5850.267	10.95	33.60	30.56	46.30	60.29	121.59	-61.30	peak
5 pp	5925.619	10.87	33.55	30.53	46.60	60.49	68.20	-7.71	peak





Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

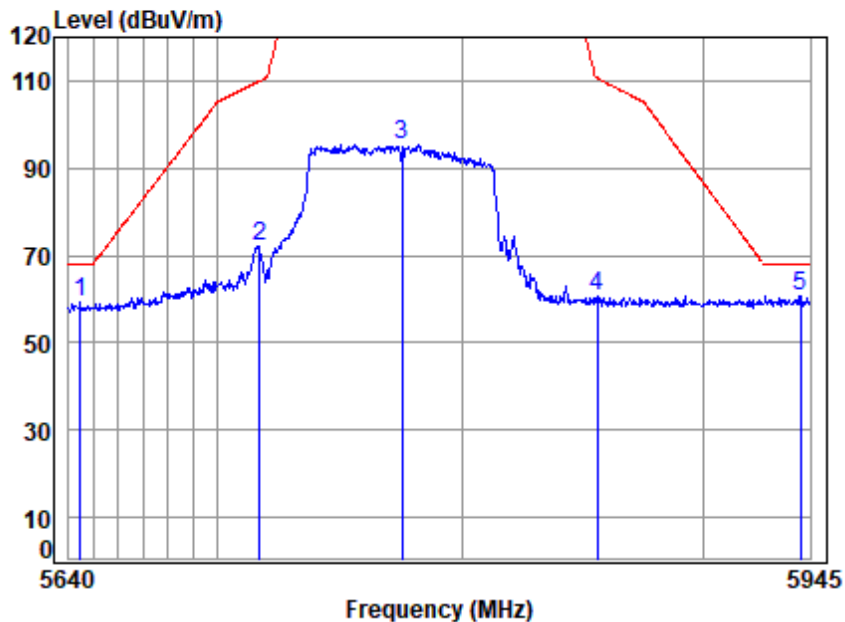

Condition: 3m VERTICAL

Job No : 01820MO

Mode : 5775 Band edge

: 5.8G Wi-Fi 11ac80

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5644.458	10.48	33.09	30.64	46.25	59.18	68.20	-9.02	Peak
2 5716.858	10.64	33.23	30.61	58.65	71.91	109.92	-38.01	peak
3 5775.000	10.91	33.35	30.59	81.77	95.44	-----	-----	peak
4 5855.815	10.95	33.59	30.56	46.62	60.60	110.57	-49.97	peak
5 pp 5940.931	10.86	33.58	30.52	46.80	60.72	68.20	-7.48	peak



## 7.6 Channel Move Time

Test Requirement KDB 905462 D02 V02 Section 5.1  
Test Method: KDB 905462 D02 V02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

### 7.6.1 E.U.T. Operation

Operating Environment:


Temperature: 25.0 °C Humidity: 38.2 % RH Atmospheric Pressure: 3.50 mbar



### 7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	Normal operating_Keep the EUT communication with the companion device.

### 7.6.3 Test Setup Diagram

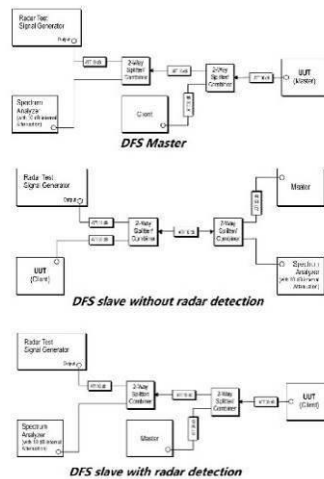

## 7.6.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by:  $Dwell (0.3ms) = S (3.900ms) / B (4000)$ ; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by:  $C (ms) = N \times Dwell (0.3ms)$ ; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details



### 7.7 Duty Cycle

Test Requirement ANSI C63.10 (2013) Section 12.2

Test Method: ANSI C63.10 (2013) Section 12.2

#### 7.7.1 E.U.T. Operation


Operating Environment:

Temperature: 20.0 °C Humidity: 42.2 % RH Atmospheric Pressure: 3.50 mbar

#### 7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

#### 7.7.3 Test Setup Diagram

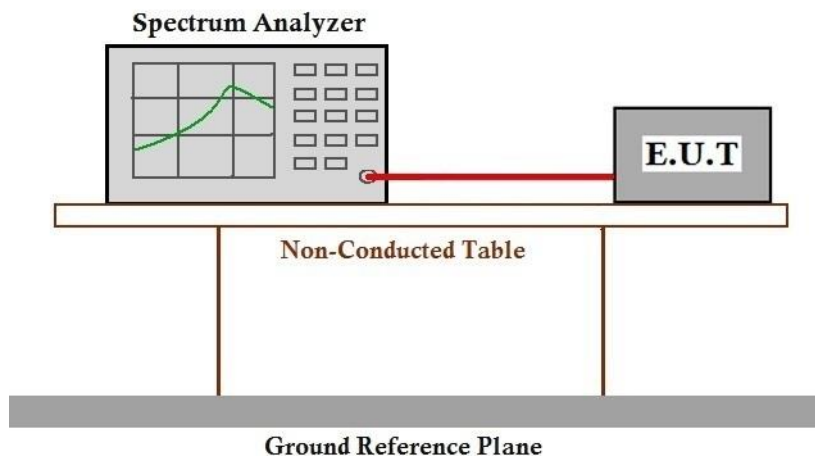

#### 7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

### 7.8 99% Bandwidth

Test Requirement ANSI C63.10 (2013) Section 12.4.2

Test Method: ANSI C63.10 (2013) Section 12.4.2

#### 7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 20.0 °C Humidity: 42.2 % RH Atmospheric Pressure: 3.50 mbar

#### 7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

#### 7.8.3 Test Setup Diagram

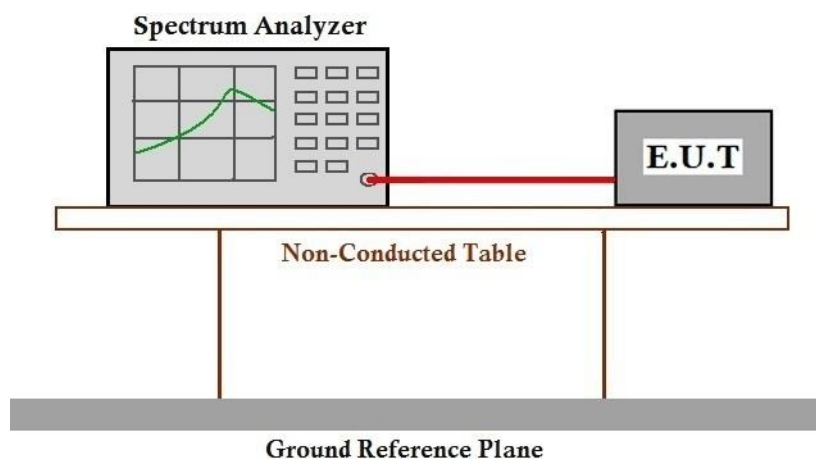

#### 7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

### 7.9 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2013) Section 12.4.1

#### 7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 20.0 °C


Humidity: 42.2 % RH

Atmospheric Pressure: 3.50 mbar

#### 7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

#### 7.9.3 Test Setup Diagram

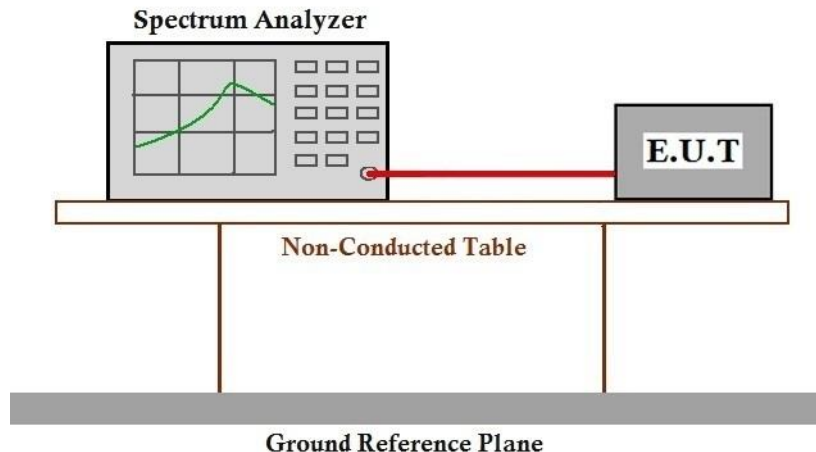

#### 7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details



### 7.10 Minimum 6 dB bandwidth (5.725-5.85 GHz band )

Test Requirement 47 CFR Part 15, Subpart E 15.407 (e)

Test Method: ANSI C63.10 (2013) Section 6.9.2

Limit:

Frequency band(MHz)	Limit
5725-5850	≥500 kHz

#### 7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 20.0 °C


Humidity: 42.2 % RH

Atmospheric Pressure: 3.50 mbar

#### 7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

#### 7.10.3 Test Setup Diagram

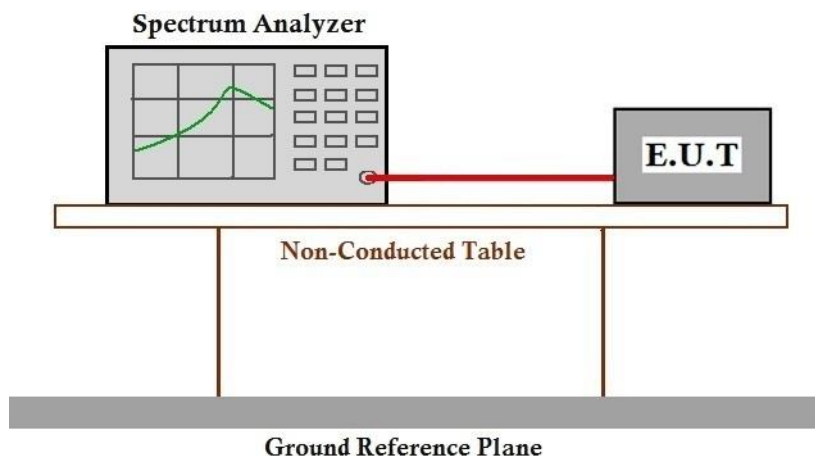

#### 7.10.4 Measurement Procedure and Data

Please Refer to Appendix for Details





## 7.11 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2013) Section 12.5

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

### 7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 20.0 °C

Humidity: 42.2 % RH


Atmospheric Pressure: 3.50 mbar

### 7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.



### 7.11.3 Test Setup Diagram

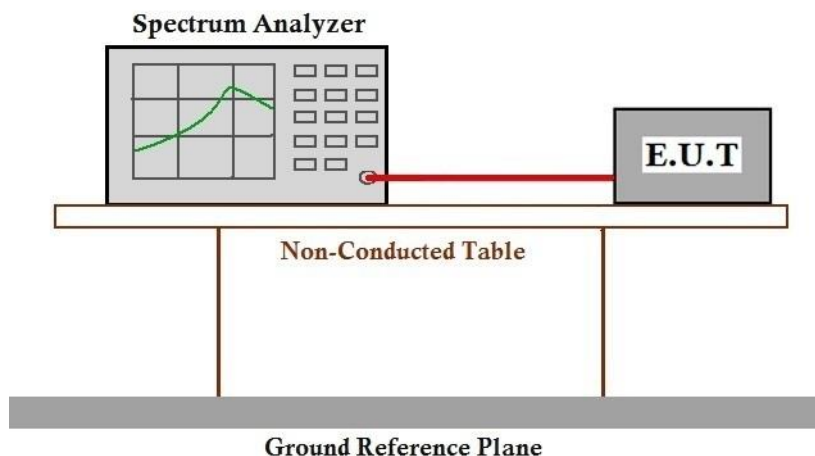

### 7.11.4 Measurement Procedure and Data

RBW conversion factor from 300kHz to 500kHz (2.22dB) for UNII Band 3 has been considered.

Please Refer to Appendix for Details



### 7.12 Frequency Stability

Test Requirement 47 CFR Part 15, Subpart E 15.407 (g)

Test Method: ANSI C63.10 (2013) Section 6.8

#### 7.12.1 E.U.T. Operation

Operating Environment:

Temperature: 20.0 °C


Humidity: 42.2 % RH

Atmospheric Pressure: 3.50 mbar

#### 7.12.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. Only the data of worst case is recorded in the report.

#### 7.12.3 Test Setup Diagram

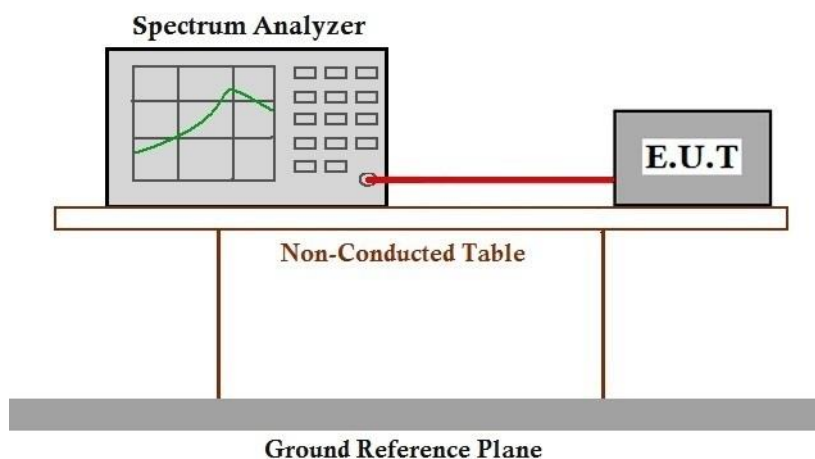

#### 7.12.4 Measurement Procedure and Data

Please Refer to Appendix for Details

## 7.13 Channel Closing Transmission Time

Test Requirement KDB 905462 D02 V02 Section 5.1  
Test Method: KDB 905462 D02 V02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

### 7.13.1 E.U.T. Operation

Operating Environment:

Temperature: 25.0 °C Humidity: 38.2 % RH Atmospheric Pressure: 3.50 mbar






### 7.13.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	Normal operating_Keep the EUT communication with the companion device.

### 7.13.3 Test Setup Diagram

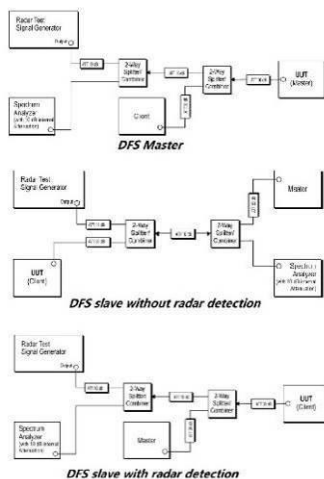

## 7.13.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by:  $Dwell (0.3ms) = S (3.900ms) / B (4000)$ ; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by:  $C (ms) = N \times Dwell (0.3ms)$ ; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details



## 8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SZCR2505001820MO

## 9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SZCR2505001820MO



## 10 Appendix

### 1. Duty Cycle

#### 1.1 Test Result

##### 1.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11a	SISO	5180	2.030	2.065	98.31	0.07	0.04
		5200	2.030	2.065	98.31	0.07	0.04
		5240	2.030	2.065	98.31	0.07	0.07
		5260	2.030	2.065	98.31	0.07	0.04
		5300	2.030	2.065	98.31	0.07	0.04
		5320	2.030	2.065	98.31	0.07	0.04
		5500	2.030	2.065	98.31	0.07	0.04
		5580	2.030	2.065	98.31	0.07	0.04
		5700	2.030	2.065	98.31	0.07	0.04
		5745	2.030	2.065	98.31	0.07	0.04
		5785	2.030	2.065	98.31	0.07	0.04
		5825	2.029	2.065	98.26	0.08	0.04
802.11n (HT20)	SISO	5180	1.890	1.926	98.13	0.08	0.03
		5200	1.890	1.925	98.18	0.08	0.03
		5240	1.890	1.925	98.18	0.08	0.00
		5260	1.890	1.926	98.13	0.08	0.03
		5300	1.890	1.926	98.13	0.08	0.03
		5320	1.890	1.925	98.18	0.08	0.03
		5500	1.890	1.926	98.13	0.08	0.03
		5580	1.889	1.924	98.18	0.08	0.04
		5700	1.889	1.924	98.18	0.08	0.03
		5745	1.889	1.925	98.13	0.08	0.03
		5785	1.890	1.925	98.18	0.08	0.03
		5825	1.890	1.925	98.18	0.08	0.03
802.11n (HT40)	SISO	5190	0.930	0.964	96.47	0.16	0.03
		5230	0.930	0.964	96.47	0.16	0.00
		5270	0.929	0.964	96.37	0.16	0.07
		5310	0.930	0.964	96.47	0.16	0.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250500182005

Page: 141 of 290

		5510	0.929	0.964	96.37	0.16	0.03
		5550	0.929	0.964	96.37	0.16	0.00
		5670	0.929	0.964	96.37	0.16	0.00
		5755	0.930	0.964	96.47	0.16	0.03
		5795	0.929	0.964	96.37	0.16	0.03
802.11ac (VHT20)	SISO	5180	1.901	1.937	98.14	0.08	0.04
		5200	1.902	1.938	98.14	0.08	0.03
		5240	1.901	1.936	98.19	0.08	0.03
		5260	1.902	1.937	98.19	0.08	0.03
		5300	1.902	1.937	98.19	0.08	0.03
		5320	1.902	1.937	98.19	0.08	0.03
		5500	1.902	1.937	98.19	0.08	0.03
		5580	1.901	1.937	98.14	0.08	0.03
		5700	1.902	1.938	98.14	0.08	0.03
		5745	1.901	1.936	98.19	0.08	0.03
		5785	1.902	1.937	98.19	0.08	0.03
		5825	1.902	1.937	98.19	0.08	0.03
802.11ac (VHT40)	SISO	5190	0.938	0.972	96.50	0.15	0.03
		5230	0.937	0.972	96.40	0.16	0.03
		5270	0.937	0.972	96.40	0.16	0.00
		5310	0.938	0.972	96.50	0.15	0.03
		5510	0.937	0.972	96.40	0.16	0.04
		5550	0.937	0.972	96.40	0.16	0.00
		5670	0.937	0.972	96.40	0.16	0.00
		5755	0.937	0.972	96.40	0.16	0.00
		5795	0.937	0.972	96.40	0.16	0.03
802.11ac (VHT80)	SISO	5210	0.457	0.492	92.89	0.32	0.03
		5290	0.457	0.492	92.89	0.32	0.07
		5530	0.457	0.492	92.89	0.32	0.06
		5610	0.457	0.492	92.89	0.32	0.07
		5775	0.456	0.492	92.68	0.33	0.07



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) Laboratory.


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

### 1.2 Test Graph


#### 1.2.1 Ant1

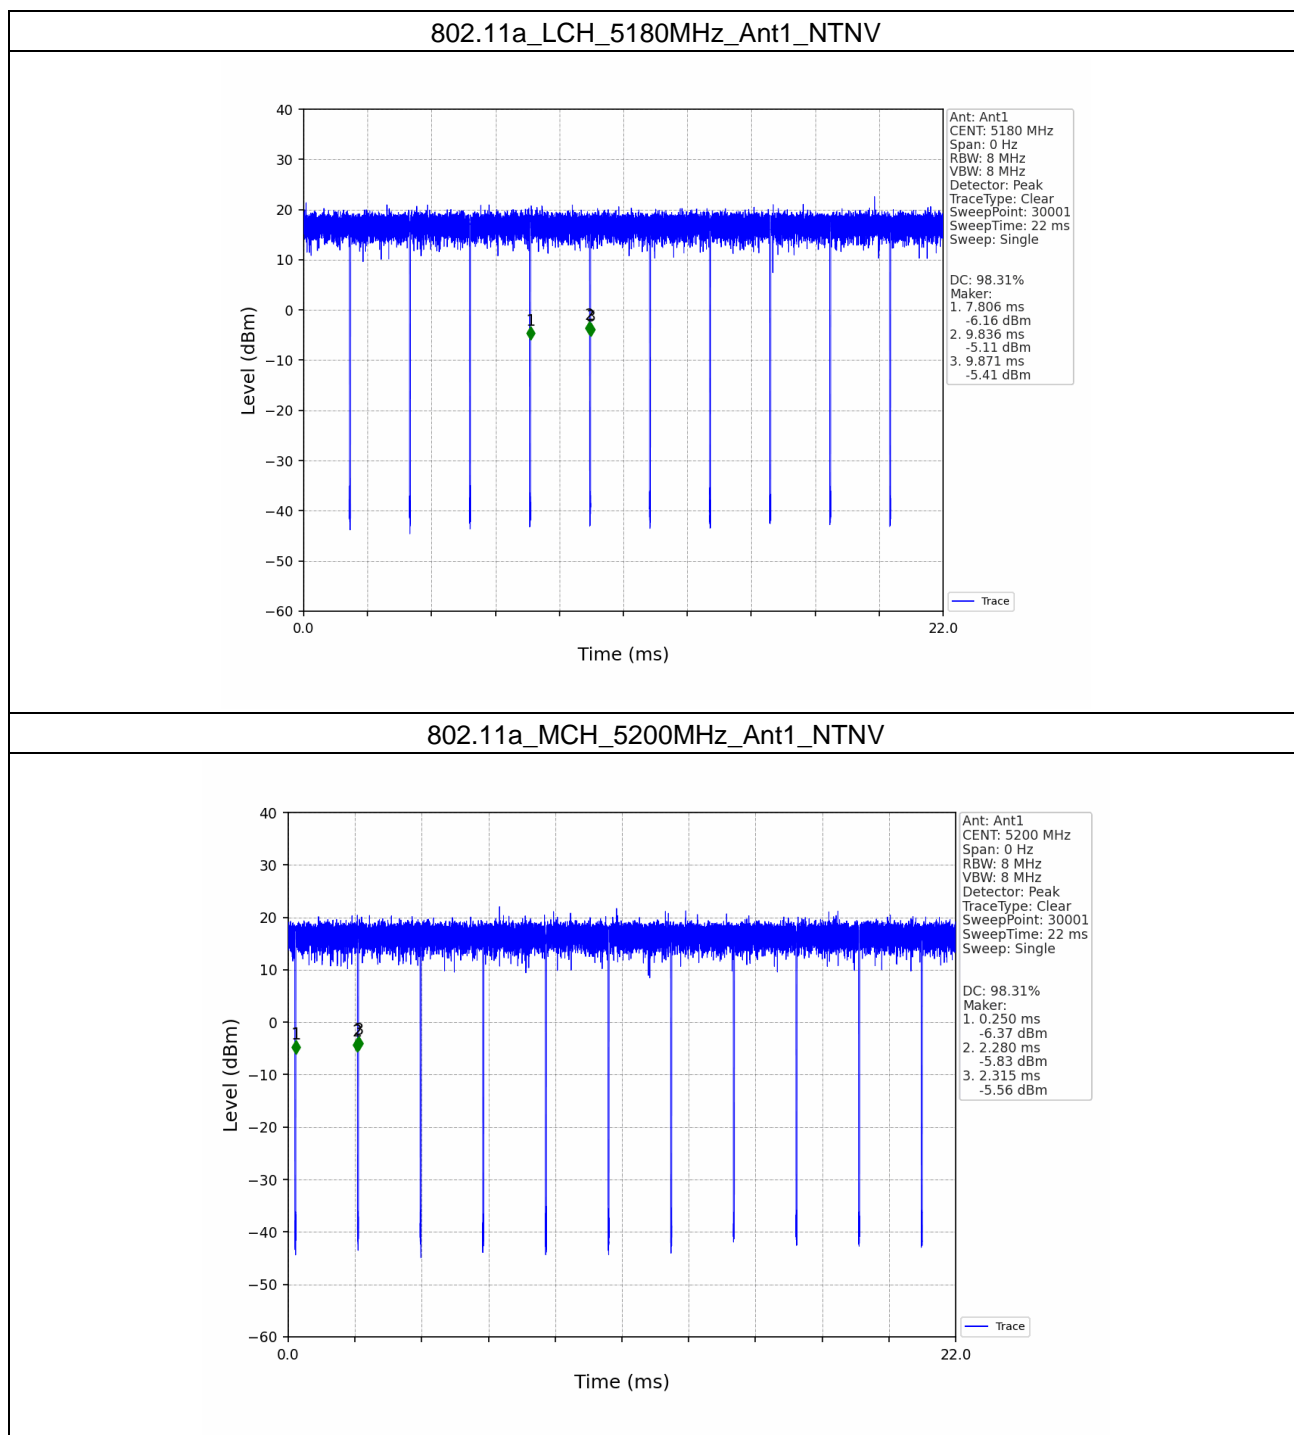


### 802.11a\_HCH\_5240MHz\_Ant1\_NTNV

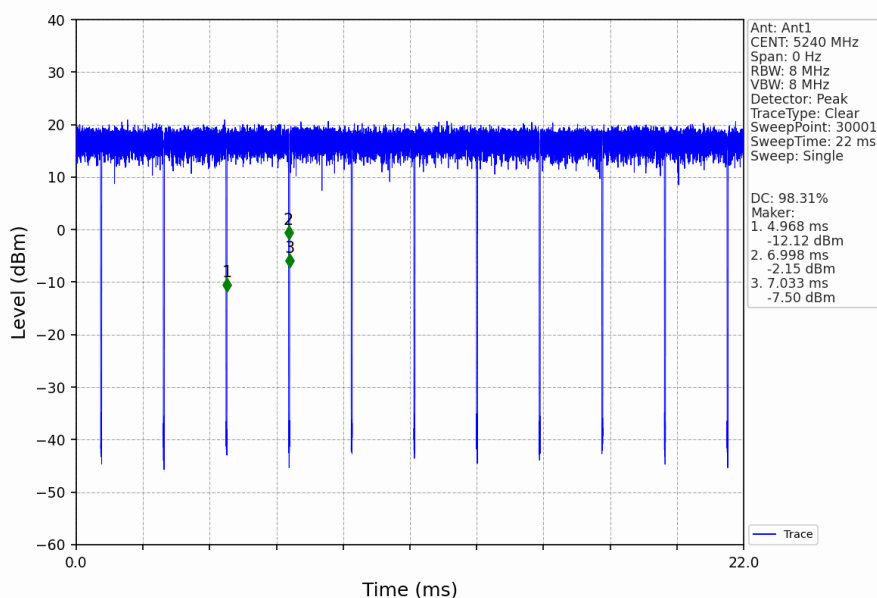


### 802.11a\_LCH\_5260MHz\_Ant1\_NTNV

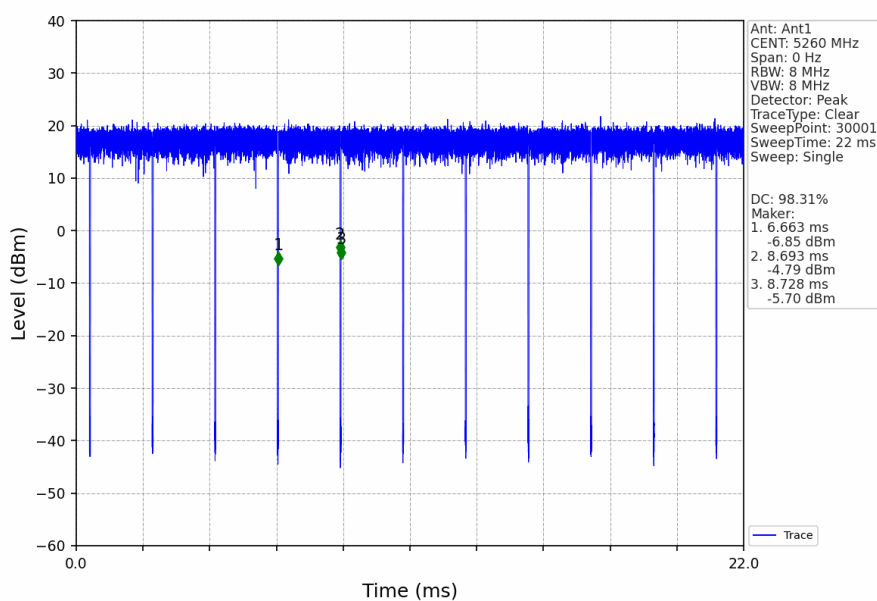

### 802.11a\_MCH\_5300MHz\_Ant1\_NTNV

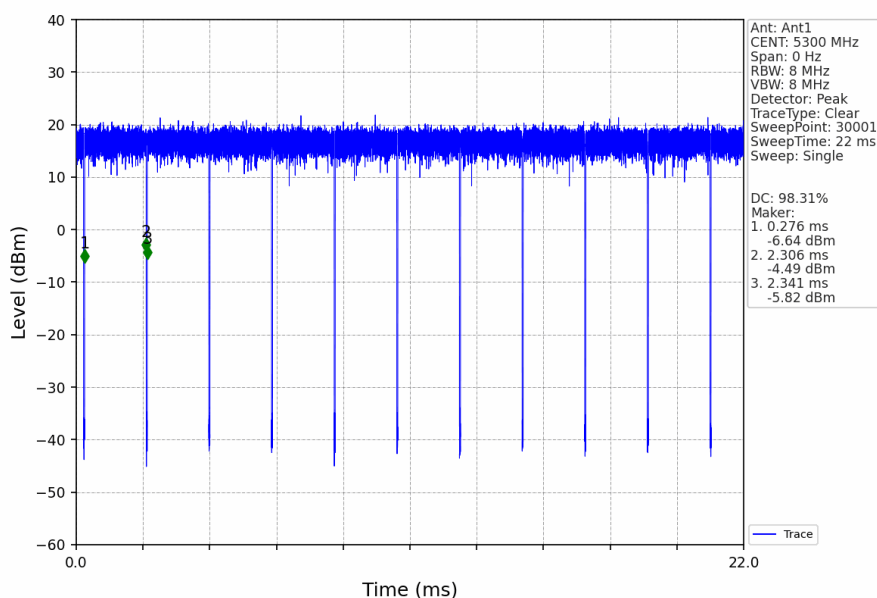


### 802.11a\_HCH\_5320MHz\_Ant1\_NTNV

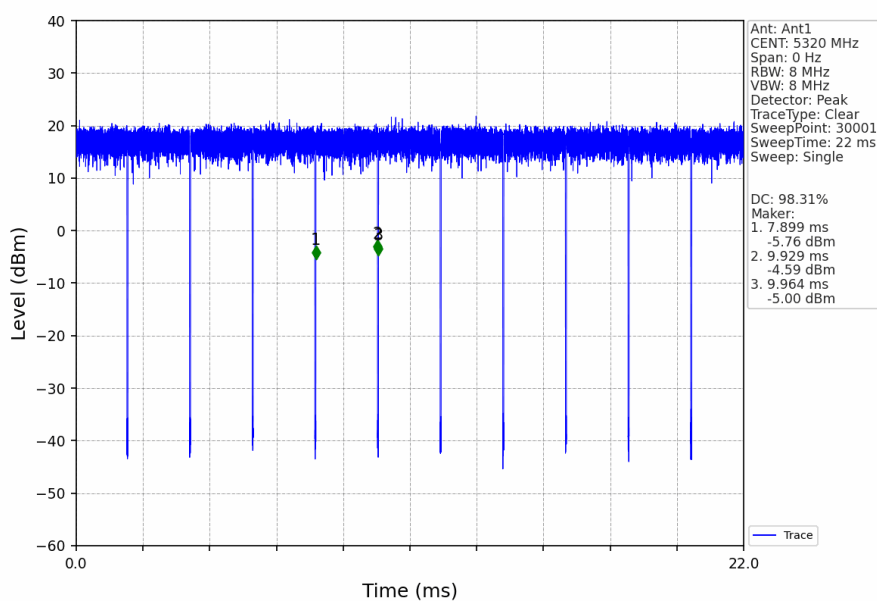




### 802.11a\_LCH\_5500MHz\_Ant1\_NTNV

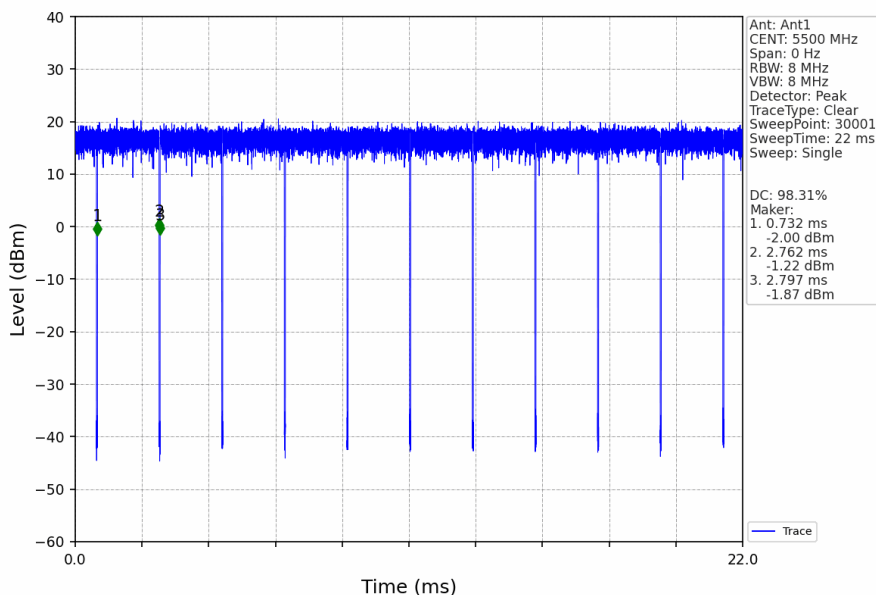

### 802.11a\_MCH\_5580MHz\_Ant1\_NTNV

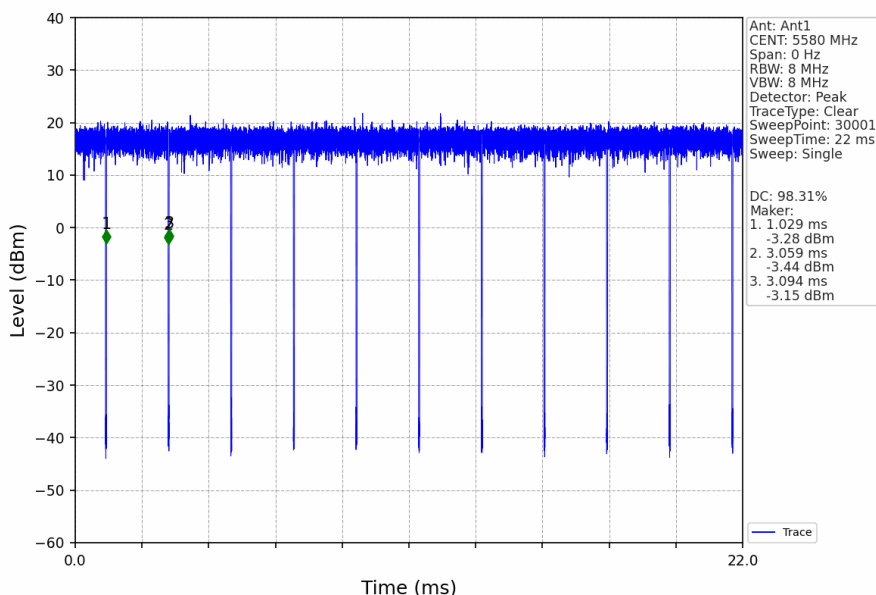


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)


SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


### 802.11a\_HCH\_5700MHz\_Ant1\_NTNV

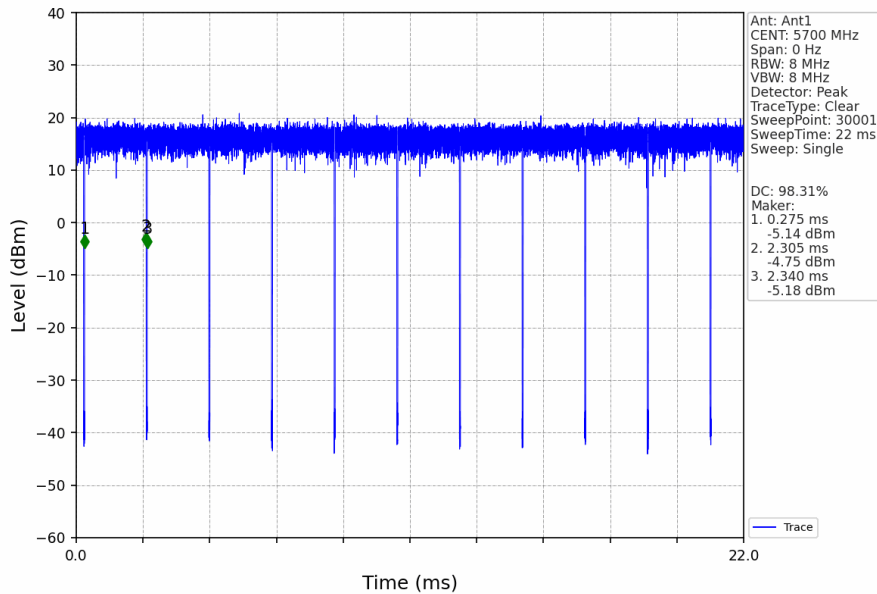


### 802.11a\_LCH\_5745MHz\_Ant1\_NTNV

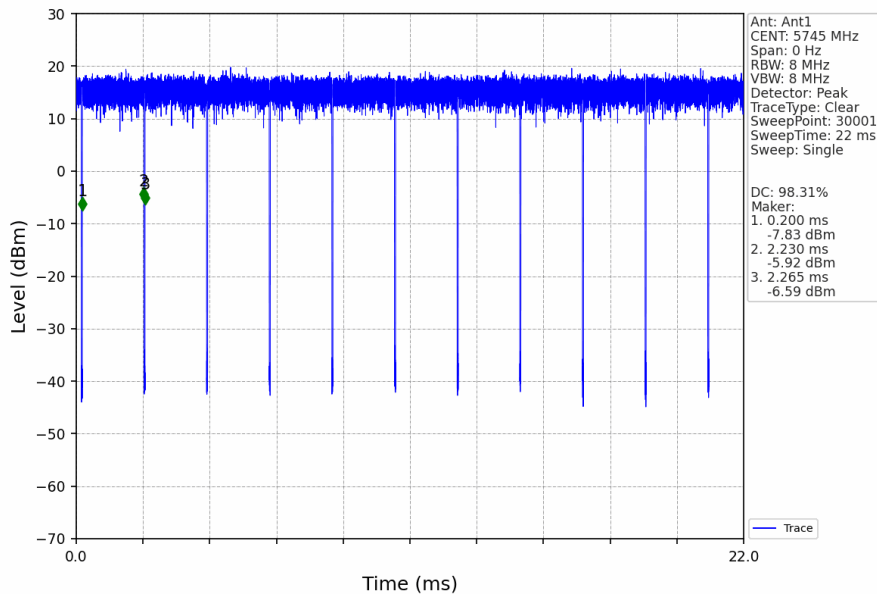


### 802.11a\_MCH\_5785MHz\_Ant1\_NTNV

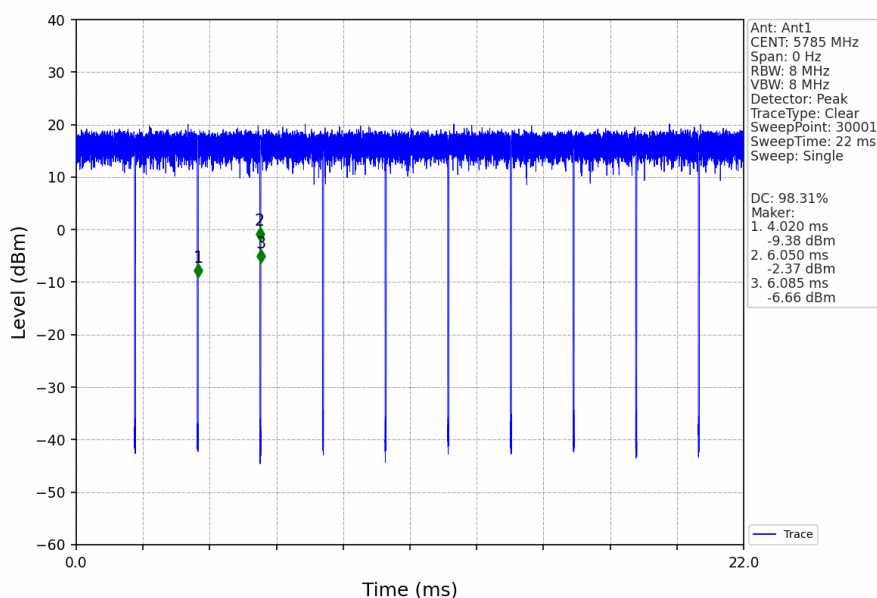


### 802.11a\_HCH\_5825MHz\_Ant1\_NTNV

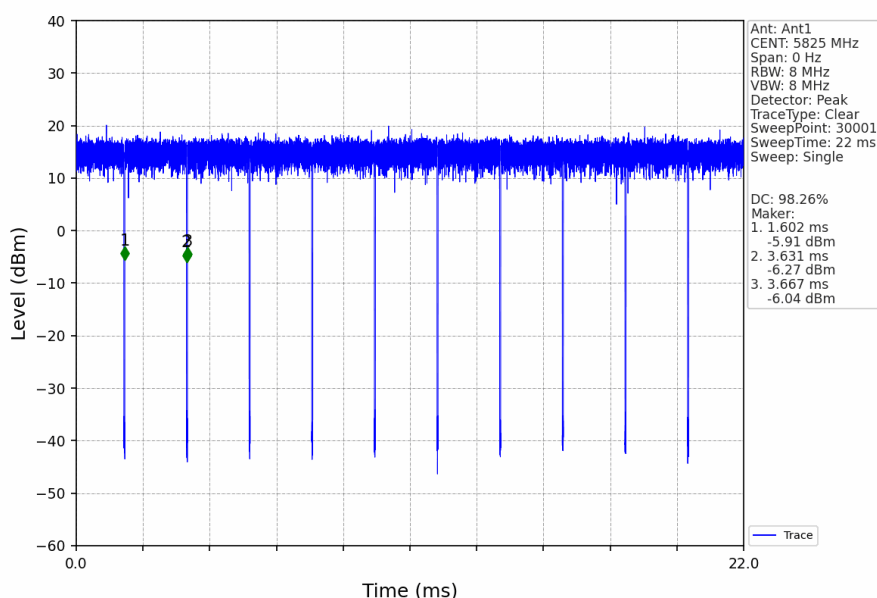

### 802.11n(HT20)\_LCH\_5180MHz\_Ant1\_NTNV

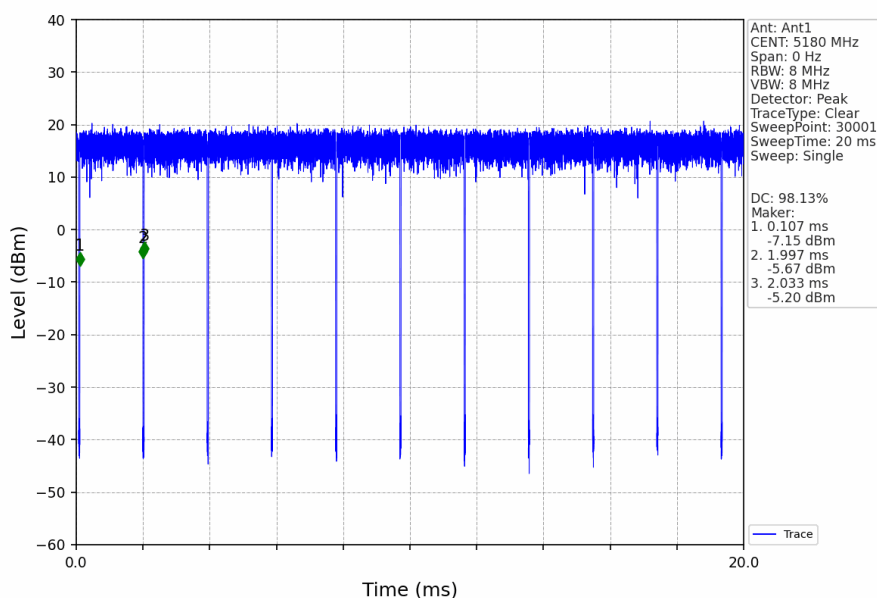


### 802.11n(HT20)\_MCH\_5200MHz\_Ant1\_NTNV

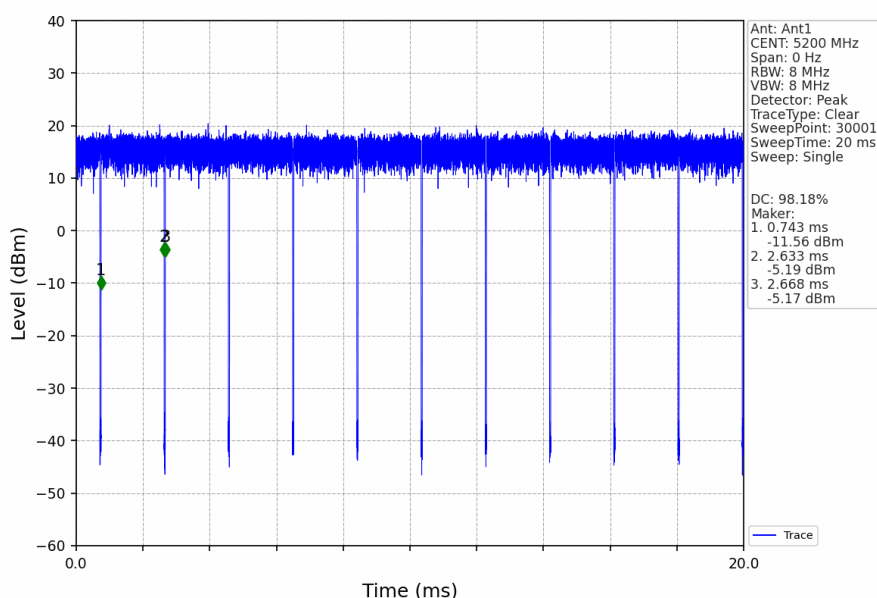





### 802.11n(HT20)\_HCH\_5240MHz\_Ant1\_NTNV

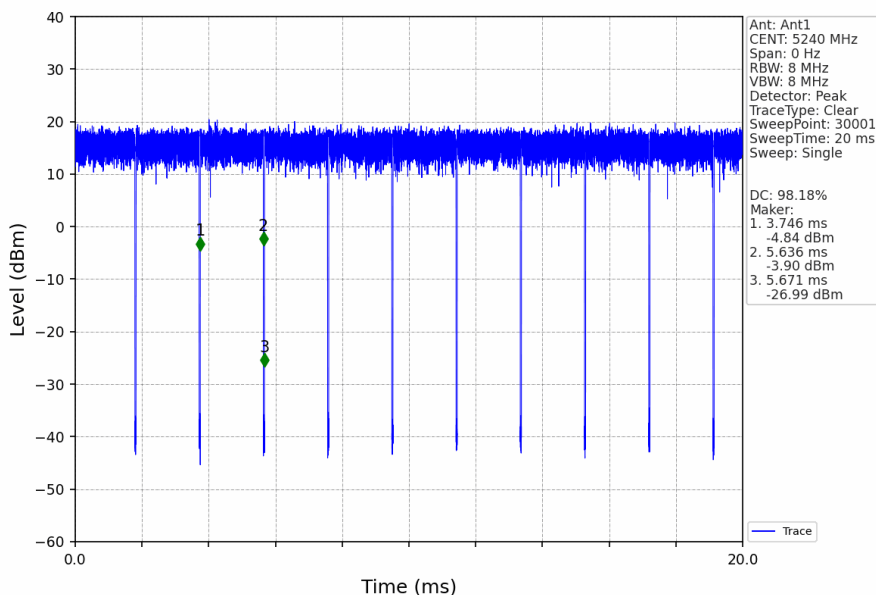


### 802.11n(HT20)\_LCH\_5260MHz\_Ant1\_NTNV

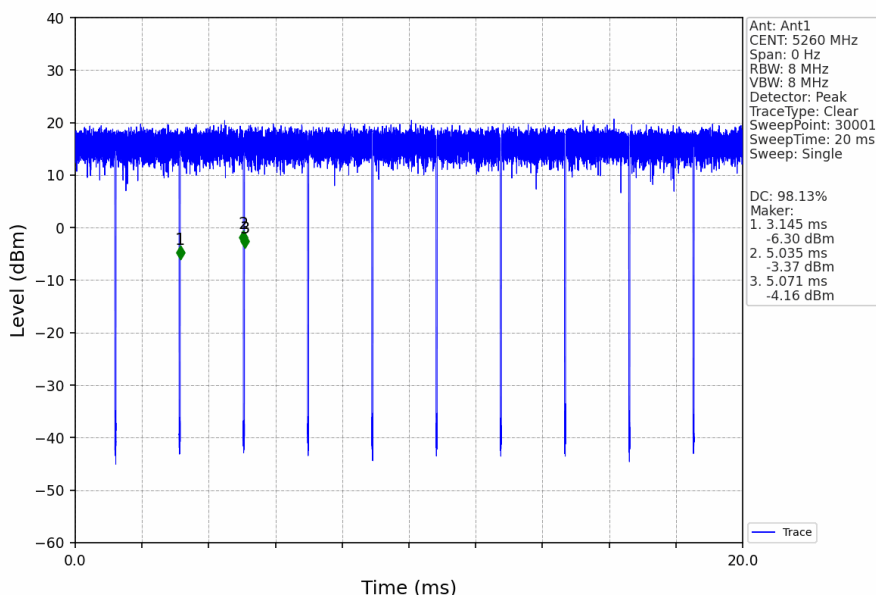

### 802.11n(HT20)\_MCH\_5300MHz\_Ant1\_NTNV

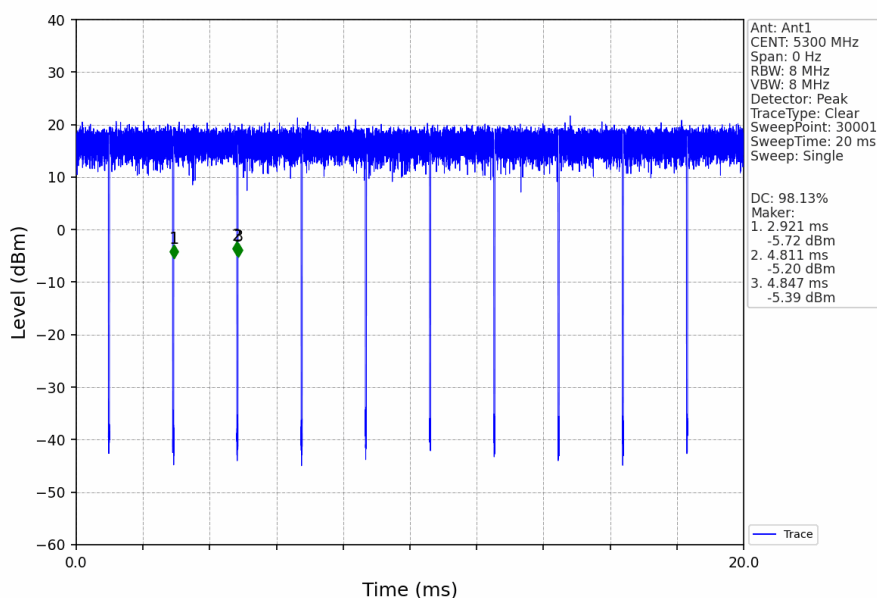

### 802.11n(HT20)\_HCH\_5320MHz\_Ant1\_NTNV

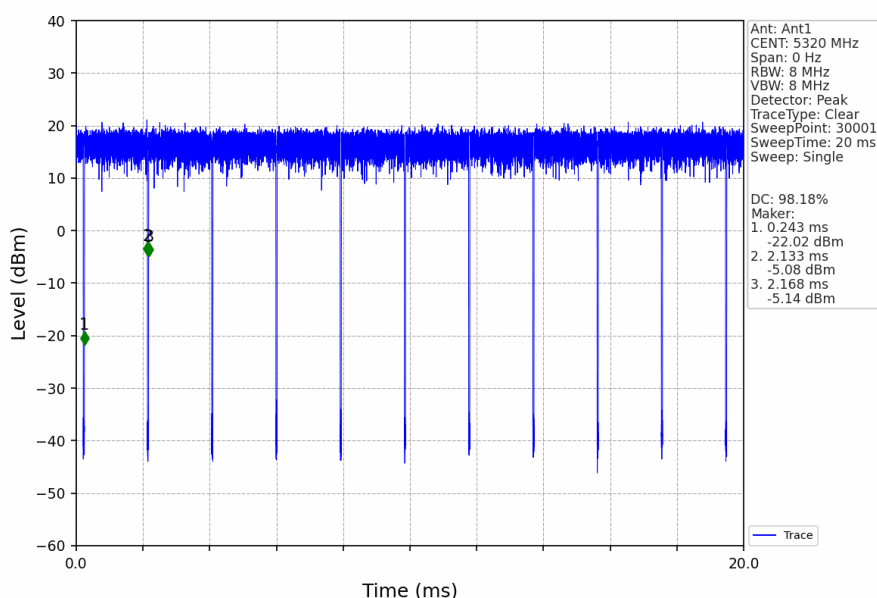


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)


SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


### 802.11n(HT20)\_LCH\_5500MHz\_Ant1\_NTNV

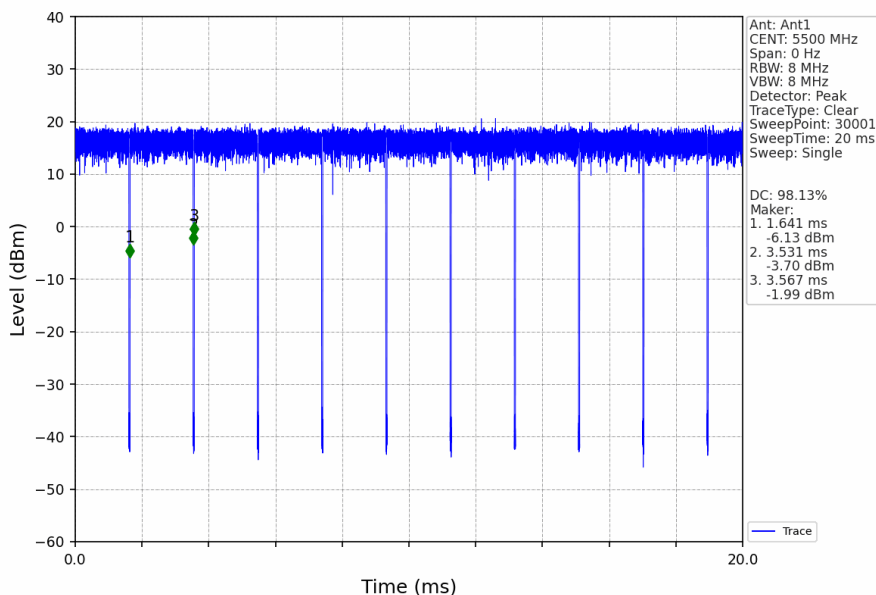


### 802.11n(HT20)\_MCH\_5580MHz\_Ant1\_NTNV

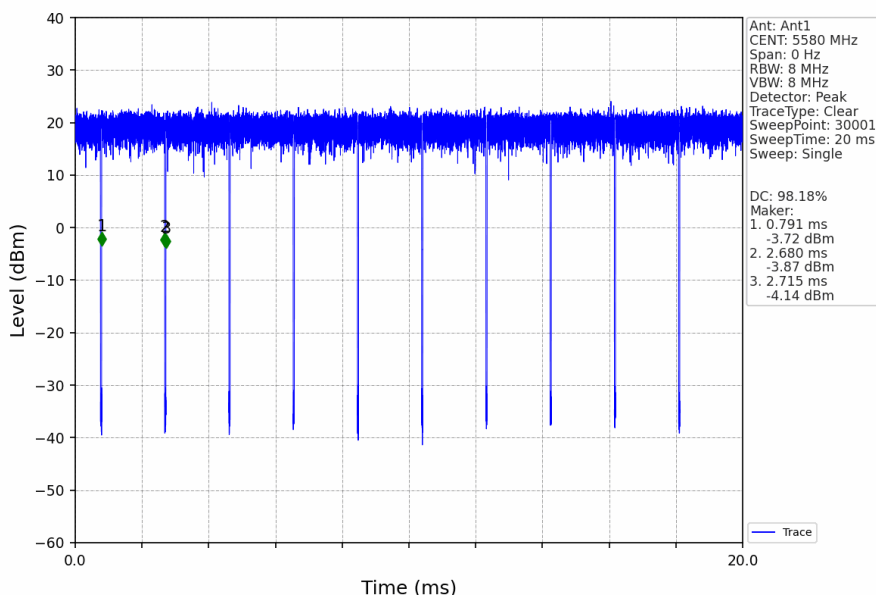

### 802.11n(HT20)\_HCH\_5700MHz\_Ant1\_NTNV

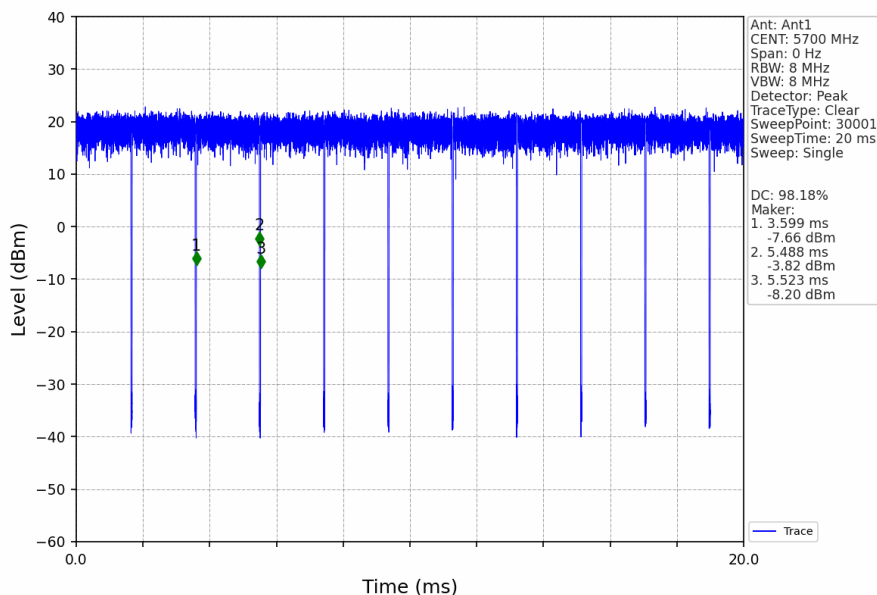


### 802.11n(HT20)\_LCH\_5745MHz\_Ant1\_NTNV

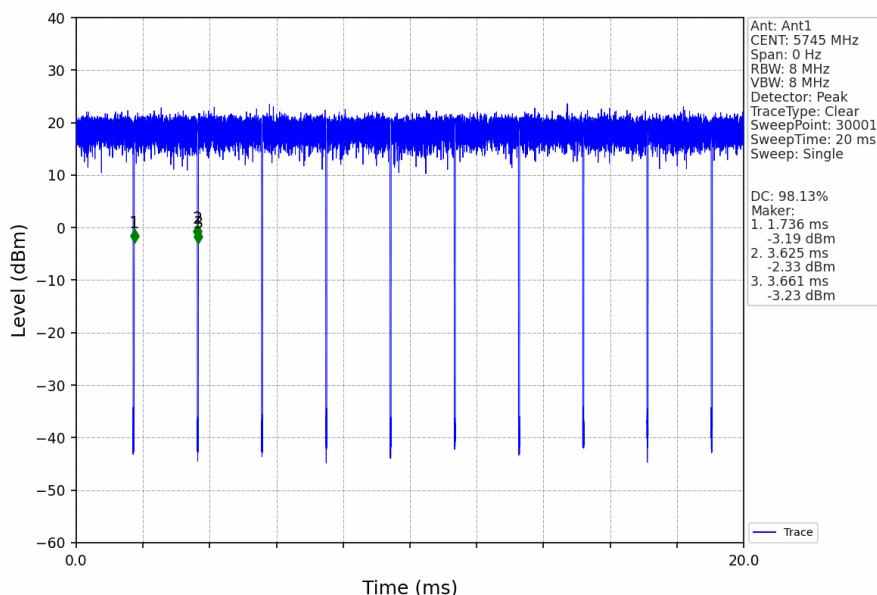





802.11n(HT20)\_MCH\_5785MHz\_Ant1\_NTNV

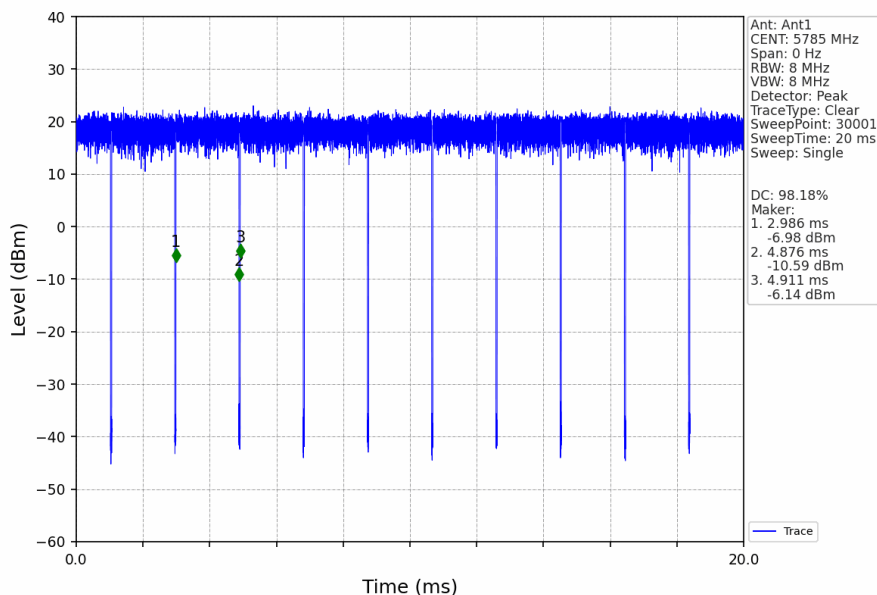


802.11n(HT20)\_HCH\_5825MHz\_Ant1\_NTNV

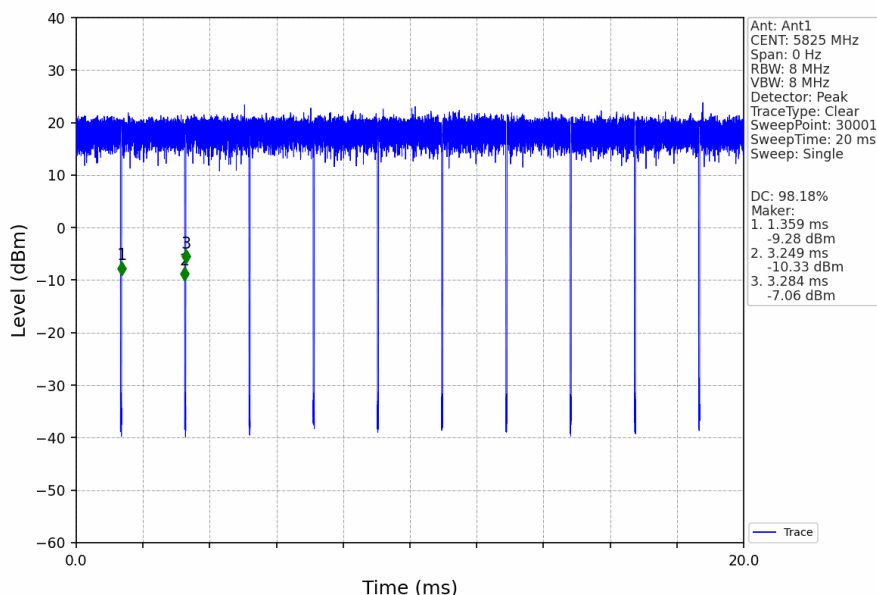

### 802.11n(HT40)\_LCH\_5190MHz\_Ant1\_NTNV

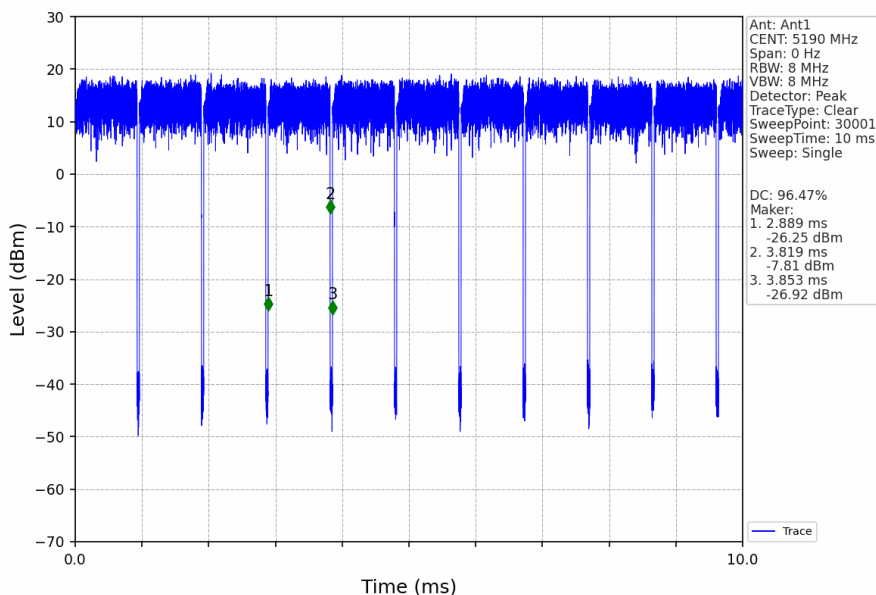

### 802.11n(HT40)\_HCH\_5230MHz\_Ant1\_NTNV

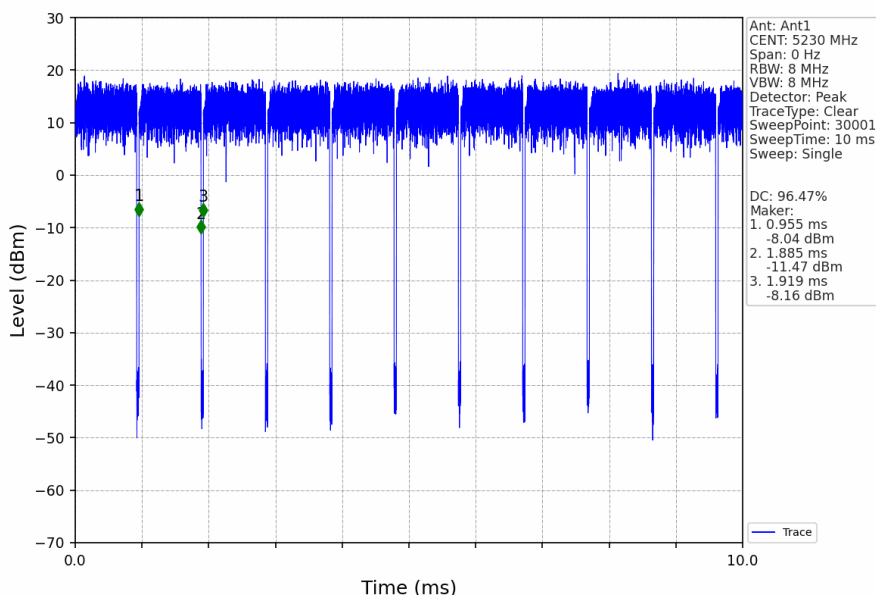


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

### 802.11n(HT40)\_LCH\_5270MHz\_Ant1\_NTNV

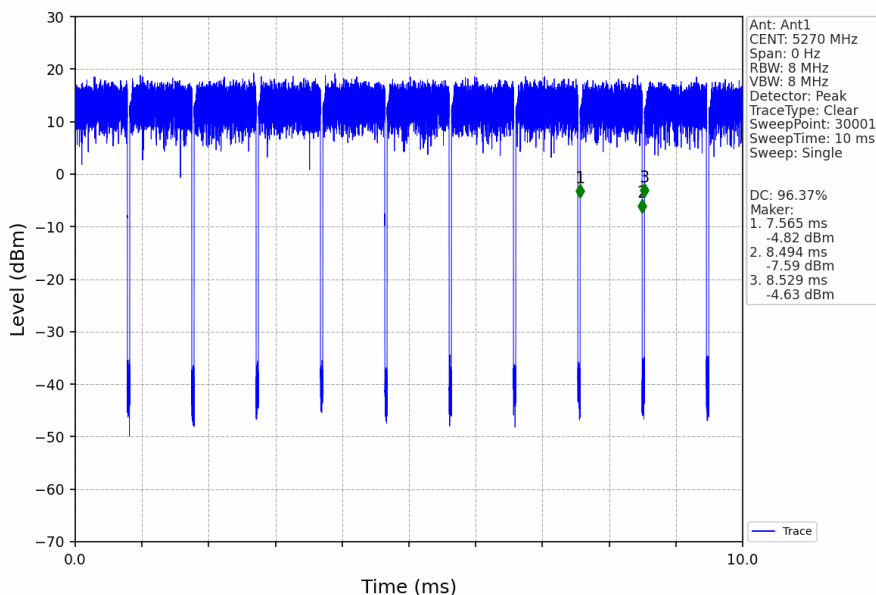

### 802.11n(HT40)\_HCH\_5310MHz\_Ant1\_NTNV

