



RF TEST REPORT

Applicant Quectel Wireless Solutions Co., Ltd
FCC ID XMR2021EC25ADL
Product LTE Module
Brand Quectel
Model EC25-ADL, EC25-ADL MINIPCIE
Report No. R2110A0927-R1V3
Issue Date January 14, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2020)/ FCC CFR 47 Part 24E (2020)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	6
1.1. Notes of the test report	6
1.2. Test facility	6
1.3. Testing Location	6
2. General Description of Equipment under Test	7
3. Applied Standards	8
4. Test Configuration	9
5. Test Case Results	10
5.1. RF Power Output	10
5.2. Effective Isotropic Radiated Power	14
5.3. Radiates Spurious Emission	17
6. Main Test Instruments	24
ANNEX A: The EUT Appearance	25
ANNEX B: Test Setup Photos	26
ANNEX C: Verify data	27
ANNEX D: Product Change Description	28



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	December 31, 2021
Rev.1	Update description in Page 4-5.	January 13, 2022
Rev.2	Added antenna gain information in Page 7.	January 14, 2022
Rev.3	Update information.	January 14, 2022

Note: This revised report (Report No. R2110A0927-R1V3) supersedes and replaces the previously issued report (Report No. R2110A0927-R1V2). Please discard or destroy the previously issued report and dispose of it accordingly.



Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS Refer to the original report: R1805A0226-R8V3; FCC ID: XMR201605EC25A And Variant report R2110A0927-R1V3; FCC ID: XMR2021EC25ADL
2	Effective Isotropic Radiated power	24.232(c)	PASS Refer to the original report: R1805A0226-R8V3; FCC ID: XMR201605EC25A And Variant report R2110A0927-R1V3; FCC ID: XMR2021EC25ADL
3	Occupied Bandwidth	2.1049	Refer to the original report: TWK160705001-00 FCC ID: XMR201605EC25A
4	Band Edge Compliance	2.1051 /24.238(a)	Refer to the original report: TWK160705001-00 FCC ID: XMR201605EC25A
5	Peak-to-Average Power Ratio	24.232/ KDB 971168 D01(5.7)	Refer to the original report: TWK160705001-00 FCC ID: XMR201605EC25A
6	Frequency Stability	2.1055 / 24.235	Refer to the original report: TWK160705001-00 FCC ID: XMR201605EC25A
7	Spurious Emissions at Antenna Terminals	2.1051 / 24.238(a)	Refer to the original report: TWK160705001-00 FCC ID: XMR201605EC25A
8	Radiates Spurious Emission	2.1053 / 24.238(a)	PASS Refer to the original report: R1805A0226-R8V3; FCC ID: XMR201605EC25A And Variant report R2110A0927-R1V3; FCC ID: XMR2021EC25ADL
Date of Testing: (Original): May 24, 2018~ June 3, 2018 (Variant): December 4, 2021 ~ December 16, 2021			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			



EC25-ADL, EC25-ADL MINI PCIe (Report No.: R2110A0927-R1V3) is a variant model of EC25-A, EC25-A MINI PCIe (Report No.: R1805A0226-R8V3).

The differences between the original device and the current one are as follows:

- 1. EC25-A, EC25-A MINI PCIe supports LTE&WCDMA, but EC25-ADL, EC25-ADL MINI PCIe disables WCDMA and voice functions through software.**
- 2. Updated FCC ID, Hardware Version, Software Version and changes Model.**

Verify data refer to the following table, other test values duplicated from the original report (Report No.: TWK160705001-00; R1805A0226-R8V3). Please refer to Appendix C for Verify data.

Test Case	Original (R1805A0226-R8V3)	Variant (R2110A0927-R1V3)
RF Power Output and Effective Radiated Power	PASS	Retest (LTE Band 2)
Radiates Spurious Emission	PASS	Verify the worst combination of each frequency band (LTE Band 2)



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com



2. General Description of Equipment under Test

Client Information

Applicant	Quectel Wireless Solutions Co., Ltd
Applicant address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
Manufacturer	Quectel Wireless Solutions Co., Ltd
Manufacturer address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

General information

EUT Description		
Model	EC25-ADL, EC25-ADL MINIPCIE	
IMEI	Original	861107037143642
	Variant	864572050000267(EC25-ADL) 864572050000036(EC25-ADL MINIPCIE)
Hardware Version	R1.0	
Software Version	EC25ADLFAR07A01M4G	
Power Supply	External Power Supply	
Antenna Type	External Antenna	
Antenna Gain	Frequency(MHz)	Gain(dBi)
	1840	1.36
	1860	1.25
	1880	1.38
	1900	1.59
	1920	1.36
Test Mode(s)	LTE Band 2;	
Test Modulation	(LTE)QPSK,16QAM	
LTE Category	4	
Maximum E.I.R.P	LTE Band 2:	26.33dBm
Rated Power Supply Voltage	3.8V	
Extreme Voltage	Minimum: 3.3V Maximum: 4.3V	
Extreme Temperature	Lowest: -30°C Highest: +50°C	
Operating Frequency Range(s)	Band	Tx (MHz)
	LTE Band 2	1850 ~ 1910
		1930 ~ 1990

Note: The information of the EUT is declared by the manufacturer.
2. The series model number is: EC25-ADL, EC25-ADL MINIPCIE. The difference of these models are have different marketing requirement.



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 24E (2020)

FCC CFR47 Part 2 (2020)

Reference standard:

ANSI C63.26 (2015)

KDB 971168 D01 Power Meas License Digital Systems v03r01



4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below for LTE Band 2:

Test items	Bandwidth (MHz)						Modulation		RB			Test Channel		
	1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	O	O	O	O	O	O	O	O	-	-	O	O	O	O
Radiates Spurious Emission	O	-	O	-	-	O	O	-	O	-	-	O	O	O
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.													

5. Test Case Results

5.1. RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

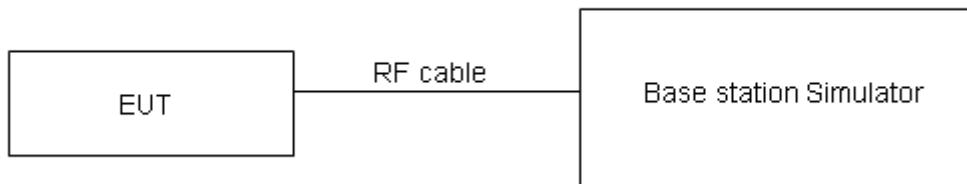

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.



Test Results

LTE Band 2				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18607/1850.7	18900/1880	19193/1909.3
1.4MHz	QPSK	1	0	23.12	22.93	23.04
		1	2	23.07	23.24	22.96
		1	5	23.09	22.98	23.10
		3	0	22.95	22.83	22.87
		3	2	22.84	22.93	22.83
		3	3	22.94	22.97	22.78
		6	0	22.02	21.99	21.87
	16QAM	1	0	22.17	22.13	22.11
		1	2	22.32	22.12	22.08
		1	5	22.13	21.91	22.17
		3	0	21.84	22.03	21.61
		3	2	21.65	21.96	21.73
		3	3	21.78	22.02	21.52
		6	0	21.07	21.03	21.04
3MHz	QPSK	1	0	22.80	23.08	22.70
		1	7	22.94	23.11	22.91
		1	14	22.97	23.04	22.63
		8	0	22.03	22.06	21.81
		8	4	21.95	21.97	21.95
		8	7	21.93	22.07	21.90
		15	0	21.98	21.98	21.88
	16QAM	1	0	21.55	22.51	21.16
		1	7	21.76	22.10	21.45
		1	14	21.83	22.54	21.22
		8	0	21.03	21.03	20.98
		8	4	20.88	21.11	20.69
		8	7	20.82	21.04	20.80
		15	0	20.94	20.99	20.85
5MHz	QPSK	RB size	RB offset	Channel/Frequency (MHz)		
				18625/1852.5	18900/1880	19175/1907.5
				1	0	22.77
				1	13	22.92
				1	24	22.94
						22.99
						22.59



10MHz	16QAM	12	0	22.00	22.01	21.77
		12	6	21.93	21.93	21.90
		12	13	21.91	22.05	21.86
		25	0	21.96	21.97	21.86
		1	0	21.52	22.47	21.13
		1	13	21.73	22.08	21.42
		1	24	21.80	22.52	21.18
		12	0	21.01	20.99	20.95
		12	6	20.85	21.06	20.65
15MHz	QPSK	12	13	20.79	20.99	20.76
		25	0	20.92	20.95	20.80
		Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)
						18650/1855
		1	0	22.79	23.07	22.69
		1	25	22.95	23.12	22.92
		1	49	22.96	23.03	22.62
	16QAM	25	0	22.03	22.06	21.81
		25	13	21.96	21.98	21.94
		25	25	21.93	22.09	21.91
		50	0	22.04	21.99	21.90
		1	0	21.54	22.50	21.15
		1	25	21.76	22.12	21.45
		1	49	21.83	22.54	21.21
	QPSK	25	0	21.04	21.04	20.99
		25	13	20.87	21.10	20.68
		25	25	20.82	21.04	20.80
		50	0	20.95	21.00	20.84
		Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)
						18675/1857.5
	16QAM	1	0	22.78	23.03	22.67
		1	38	22.93	23.11	22.89
		1	74	22.93	22.98	22.58
		36	0	22.01	22.02	21.78
		36	18	21.93	21.93	21.90
		36	39	21.90	22.06	21.87
		75	0	22.02	21.95	21.85



		36	18	20.84	21.05	20.64	
		36	39	20.80	21.00	20.77	
		75	0	20.92	20.95	20.80	
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)	18700/1860	18900/1880	19100/1900
20MHz	QPSK	1	0	22.75	22.99	22.64	
		1	50	22.92	23.07	22.87	
		1	99	22.91	22.97	22.55	
		50	0	21.98	21.97	21.74	
		50	25	21.91	21.89	21.87	
		50	50	21.87	22.01	21.83	
		100	0	21.99	21.90	21.81	
	16QAM	1	0	21.47	22.44	21.08	
		1	50	21.70	22.07	21.39	
		1	99	21.78	22.47	21.16	
		50	0	20.98	20.98	20.93	
		50	25	20.81	21.03	20.61	
		50	50	20.77	20.95	20.73	
		100	0	20.90	20.91	20.77	



5.2. Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement


The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI/TIA-603-E (2016).

- a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. LOSS = Generator Output Power (dBm) – Analyzer reading (dBm)
- e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP\ (dBm) = LVL\ (dBm) + LOSS\ (dB)$
- f) The maximum ERP is the maximum value determined in the preceding step.
- g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $ERP\ (dBm) = Output\ Power\ (dBm) - Losses\ (dB) + Antenna\ Gain\ (dBd)$
where: dBd refers to gain relative to an ideal dipole.

$EIRP\ (dBm) = ERP\ (dBm) + 2.15\ (dB)$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test setup

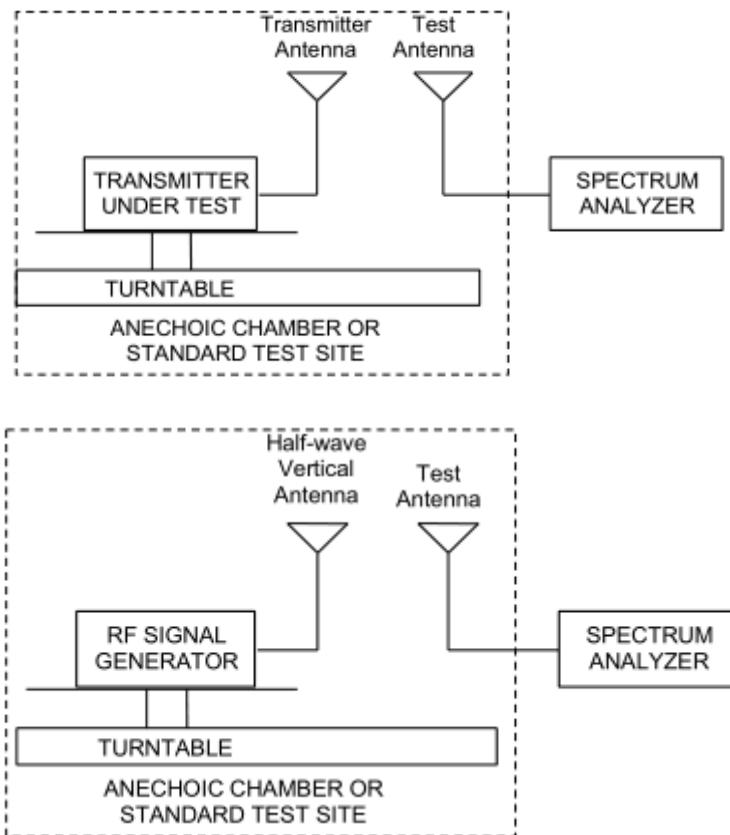

Limits

Rule Part 24.232(c) Mobile and portable stations are limited to 2 watts EIRP.

Rule Part 24.232(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Limit	$\leq 2 \text{ W (33 dBm)}$
-------	-----------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19 \text{ dB}$

**Test Results:**

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

LTE Band 2						
bandwidth	Channel	Frequency (MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	Low	1850.7	Horizontal	25.76	33	Pass
	Mid	1880	Horizontal	26.33	33	Pass
	High	1909.3	Horizontal	26.11	33	Pass
3 MHz (QPSK)	Low	1851.5	Horizontal	25.87	33	Pass
	Mid	1880	Horizontal	26.31	33	Pass
	High	1908.5	Horizontal	26.32	33	Pass
5 MHz (QPSK)	Low	1852.5	Horizontal	25.49	33	Pass
	Mid	1880	Horizontal	26.15	33	Pass
	High	1907.5	Horizontal	25.98	33	Pass
10 MHz (QPSK)	Low	1855	Horizontal	25.59	33	Pass
	Mid	1880	Horizontal	26.32	33	Pass
	High	1905	Horizontal	26.02	33	Pass
15 MHz (QPSK)	Low	1857.5	Horizontal	25.32	33	Pass
	Mid	1880	Horizontal	26.07	33	Pass
	High	1902.5	Horizontal	25.87	33	Pass
20 MHz (QPSK)	Low	1860	Horizontal	25.96	33	Pass
	Mid	1880	Horizontal	26.18	33	Pass
	High	1900	Horizontal	26.10	33	Pass
1.4 MHz (16QAM)	Low	1850.7	Horizontal	25.54	33	Pass
	Mid	1880	Horizontal	26.14	33	Pass
	High	1909.3	Horizontal	25.92	33	Pass
3 MHz (16QAM)	Low	1851.5	Horizontal	25.64	33	Pass
	Mid	1880	Horizontal	26.14	33	Pass
	High	1908.5	Horizontal	26.11	33	Pass
5 MHz (16QAM)	Low	1852.5	Horizontal	25.26	33	Pass
	Mid	1880	Horizontal	26.00	33	Pass
	High	1907.5	Horizontal	25.78	33	Pass
10 MHz (16QAM)	Low	1855	Horizontal	25.46	33	Pass
	Mid	1880	Horizontal	26.15	33	Pass
	High	1905	Horizontal	25.74	33	Pass
15 MHz (16QAM)	Low	1857.5	Horizontal	25.20	33	Pass
	Mid	1880	Horizontal	25.92	33	Pass
	High	1902.5	Horizontal	25.65	33	Pass
20 MHz (16QAM)	Low	1860	Horizontal	25.74	33	Pass
	Mid	1880	Horizontal	25.62	33	Pass
	High	1900	Horizontal	25.78	33	Pass



5.3. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI/TIA-603-E (2016).
2. The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$

The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$

8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

30MHz~~~1GHz

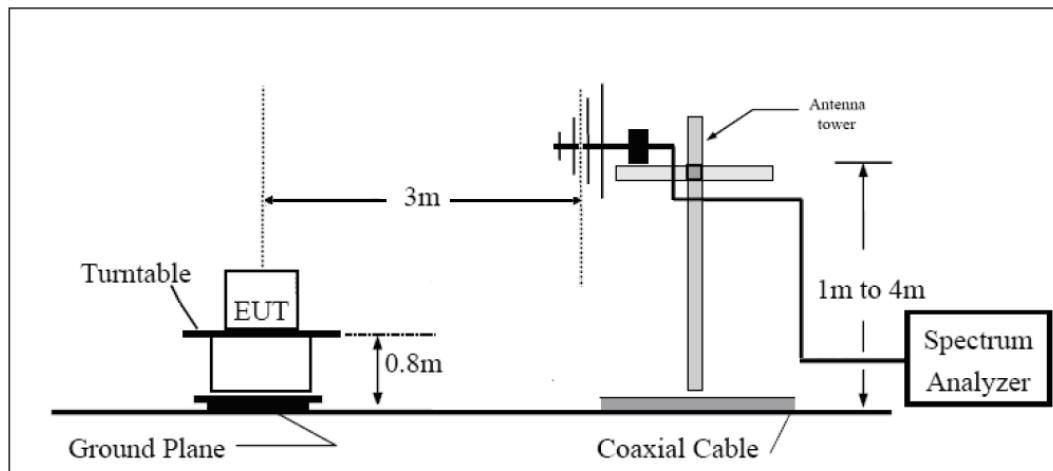

Above 1GHz

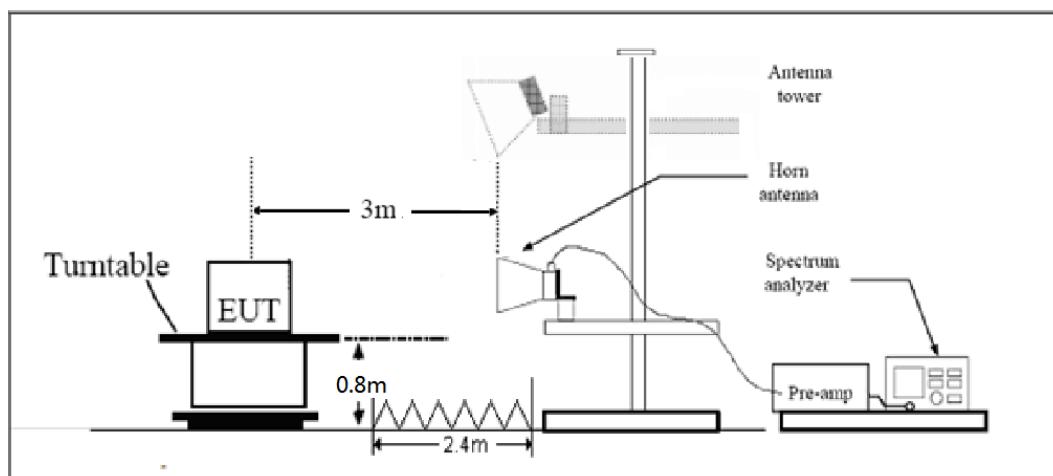

Note: Area side: 2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Limits

Rule Part 24.238(a) specifies that "on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB."

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.



Test Result

Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, from 30MHz to 1GHz and above 18 GHz are all noise floor will not be recorded in the report.

LTE Band 2 1.4MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3700.5	-66.44	5.1	11.05	Horizontal	-60.49	-13.00	47.49	45
3	5550.8	-58.25	5.42	12.65	Horizontal	-51.02	-13.00	38.02	225
4	7402.8	-63.63	6.7	13.85	Horizontal	-56.48	-13.00	43.48	0
5	9253.5	-62.46	7.01	14.75	Horizontal	-54.72	-13.00	41.72	180
6	11104.2	-62.58	7.48	15.95	Horizontal	-54.11	-13.00	41.11	45
7	12954.9	-60.53	7.51	16.55	Horizontal	-51.49	-13.00	38.49	90
8	14805.6	-57.64	8.24	15.35	Horizontal	-50.53	-13.00	37.53	315
9	16656.3	-55.87	8.41	14.95	Horizontal	-49.33	-13.00	36.33	90
10	18507.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.0	-64.51	5.10	11.05	Horizontal	-58.56	-13.00	45.56	45
3	5638.9	-56.76	5.42	12.65	Horizontal	-49.53	-13.00	36.53	225
4	7520.0	-63.09	6.70	13.85	Horizontal	-55.94	-13.00	42.94	315
5	9400.0	-62.31	7.01	14.75	Horizontal	-54.57	-13.00	41.57	225
6	11280.0	-63.44	7.48	15.95	Horizontal	-54.97	-13.00	41.97	225
7	13160.0	-61.88	7.51	16.55	Horizontal	-52.84	-13.00	39.84	270
8	15040.0	-57.03	8.24	15.35	Horizontal	-49.92	-13.00	36.92	135
9	16920.0	-53.61	8.41	14.95	Horizontal	-47.07	-13.00	34.07	90
10	18800.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 1.4MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3817.5	-62.68	5.10	11.05	Horizontal	-56.73	-13.00	43.73	225
3	5726.6	-52.83	5.42	12.65	Horizontal	-45.60	-13.00	32.60	270
4	7637.2	-63.43	6.70	13.85	Horizontal	-56.28	-13.00	43.28	315
5	9546.5	-62.58	7.01	14.75	Horizontal	-54.84	-13.00	41.84	90
6	11455.8	-63.76	7.48	15.95	Horizontal	-55.29	-13.00	42.29	180
7	13365.1	-62.31	7.51	16.55	Horizontal	-53.27	-13.00	40.27	135
8	15274.4	-58.82	8.24	15.35	Horizontal	-51.71	-13.00	38.71	45
9	17183.7	-55.37	8.41	14.95	Horizontal	-48.83	-13.00	35.83	90
10	19093.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 5MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3700.5	-65.52	5.10	11.05	Horizontal	-59.57	-13.00	46.57	225
3	5551.5	-59.48	5.42	12.65	Horizontal	-52.25	-13.00	39.25	270
4	7410.0	-63.88	6.70	13.85	Horizontal	-56.73	-13.00	43.73	90
5	9262.5	-61.69	7.01	14.75	Horizontal	-53.95	-13.00	40.95	0
6	11115.0	-63.45	7.48	15.95	Horizontal	-54.98	-13.00	41.98	135
7	12967.5	-61.33	7.51	16.55	Horizontal	-52.29	-13.00	39.29	0
8	14820.0	-54.51	8.24	15.35	Horizontal	-47.40	-13.00	34.40	45
9	16672.5	-54.65	8.41	14.95	Horizontal	-48.11	-13.00	35.11	45
10	18525.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3755.6	-63.99	5.10	11.05	Horizontal	-58.04	-13.00	45.04	225
3	5633.6	-58.04	5.42	12.65	Horizontal	-50.81	-13.00	37.81	270
4	7520.0	-62.63	6.70	13.85	Horizontal	-55.48	-13.00	42.48	180
5	9400.0	-62.12	7.01	14.75	Horizontal	-54.38	-13.00	41.38	45
6	11280.0	-60.40	7.48	15.95	Horizontal	-51.93	-13.00	38.93	0
7	13160.0	-59.68	7.51	16.55	Horizontal	-50.64	-13.00	37.64	90
8	15040.0	-54.97	8.24	15.35	Horizontal	-47.86	-13.00	34.86	0
9	16920.0	-54.84	8.41	14.95	Horizontal	-48.30	-13.00	35.30	315
10	18800.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 5MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3810.8	-63.41	5.10	11.05	Horizontal	-57.46	-13.00	44.46	225
3	5716.1	-55.86	5.42	12.65	Horizontal	-48.63	-13.00	35.63	135
4	7621.5	-64.39	6.70	13.85	Horizontal	-57.24	-13.00	44.24	315
5	9537.5	-61.85	7.01	14.75	Horizontal	-54.11	-13.00	41.11	90
6	11445.0	-62.00	7.48	15.95	Horizontal	-53.53	-13.00	40.53	0
7	13352.5	-60.29	7.51	16.55	Horizontal	-51.25	-13.00	38.25	180
8	15260.0	-56.11	8.24	15.35	Horizontal	-49.00	-13.00	36.00	45
9	17167.5	-54.25	8.41	14.95	Horizontal	-47.71	-13.00	34.71	45
10	19075.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 20MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3702.0	-67.33	5.10	11.05	Horizontal	-61.38	-13.00	48.38	225
3	5553.4	-56.99	5.42	12.65	Horizontal	-49.76	-13.00	36.76	135
4	7440.0	-63.53	6.70	13.85	Horizontal	-56.38	-13.00	43.38	45
5	9300.0	-62.03	7.01	14.75	Horizontal	-54.29	-13.00	41.29	90
6	11160.0	-63.74	7.48	15.95	Horizontal	-55.27	-13.00	42.27	0
7	13020.0	-63.03	7.51	16.55	Horizontal	-53.99	-13.00	40.99	135
8	14880.0	-59.05	8.24	15.35	Horizontal	-51.94	-13.00	38.94	45
9	16740.0	-54.58	8.41	14.95	Horizontal	-48.04	-13.00	35.04	90
10	18600.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 20MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3742.1	-65.33	5.10	11.05	Horizontal	-59.38	-13.00	46.38	135
3	5613.4	-57.32	5.42	12.65	Horizontal	-50.09	-13.00	37.09	45
4	7484.6	-61.76	6.70	13.85	Horizontal	-54.61	-13.00	41.61	90
5	9400.0	-61.54	7.01	14.75	Horizontal	-53.80	-13.00	40.80	225
6	11280.0	-62.29	7.48	15.95	Horizontal	-53.82	-13.00	40.82	180
7	13160.0	-62.30	7.51	16.55	Horizontal	-53.26	-13.00	40.26	45
8	15040.0	-57.51	8.24	15.35	Horizontal	-50.40	-13.00	37.40	135
9	16920.0	-55.54	8.41	14.95	Horizontal	-49.00	-13.00	36.00	0
10	18800.0	/	/	/	/	/	/	/	/

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 20MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3781.9	-62.52	5.10	11.05	Horizontal	-56.57	-13.00	43.57	135
3	5673.8	-54.83	5.42	12.65	Horizontal	-47.60	-13.00	34.60	0
4	7564.1	-63.79	6.70	13.85	Horizontal	-56.64	-13.00	43.64	315
5	9500.0	-61.72	7.01	14.75	Horizontal	-53.98	-13.00	40.98	80
6	11400.0	-64.02	7.48	15.95	Horizontal	-55.55	-13.00	42.55	225
7	13300.0	-60.34	7.51	16.55	Horizontal	-51.30	-13.00	38.30	180
8	15200.0	-57.35	8.24	15.35	Horizontal	-50.24	-13.00	37.24	90
9	17100.0	-55.17	8.41	14.95	Horizontal	-48.63	-13.00	35.63	135
10	19000.0	/	/	/	/	/	/	/	/

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMU200	118133	2018-05-13	2019-05-12
Base Station Simulator	R&S	CMW500	113645	2018-05-13	2019-05-12
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	NA	NA
Spectrum Analyzer	Agilent	N9010A	MY47191109	2018-05-20	2019-05-19
Universal Radio Communication Tester	Agilent	E5515C	MY48367192	2018-05-20	2019-05-19
Signal Analyzer	R&S	FSV30	100815	2017-12-17	2018-12-16
EMI Test Receiver	R&S	ESCI	100948	2018-05-20	2019-05-19
Signal generator	R&S	SMB 100A	102594	2018-05-13	2019-05-12
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2014-12-06	2019-12-05
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	100126	2014-12-06	2019-12-05
Climatic Chamber	Re Ce	PT-30B	20101891	2015-07-18	2018-07-17
Horn Antenna	ETS-Lindgren	3160-09	00102644	2015-01-30	2020-01-29
RF Cable	Agilent	SMA 15cm	0001	2018-02-03	2018-08-02
Preamplifier	R&S	SCU18	102327	2017-06-18	2018-06-17
Software	R&S	EMC32	V 8.52.0	NA	NA
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2018-05-07	2019-05-06

*****END OF REPORT*****



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.



ANNEX C: Verify data

The Verify data are submitted separately.



ANNEX D: Product Change Description

The Product Change Description are submitted separately.