



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V03

Report Template Revision Date: Mar.1st, 2017

Test Report

Report No. : CQAS20190500394E-03
Applicant: DongGuan Mae Tay Electronic Co.,Ltd
Address of Applicant: Beihuanlu Industrial Area, Changping Town Dongguan, Guangdong, China
Manufacturer: DongGuan Mae Tay Electronic Co.,Ltd
Address of Manufacturer: Beihuanlu Industrial Area, Changping Town Dongguan, Guangdong, China
Equipment Under Test (EUT):
Product: USB Dongle
Model No.: DX-PNC2019
Brand Name: N/A
FCC ID: 2AAIL-DG007
Standards: 47 CFR PART 15, Subpart B
Date of Test: 2019-05-30 to 2019-06-03
Date of Issue: 2019-06-03
Test Result : **PASS***

Tested By:

Daisy Qin

(Daisy Qin)

Reviewed By:

Aaron Ma

((Aaron Ma)

Approved By:

Jack Ai

(Jack Ai)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

Revision History Of Report

Report No.	Version	Description	Issue Date
CQAS20190500394E-03	Rev.01	Initial report	2019-06-03

2 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 25GHz)	47 CFR PART 15, Subpart B ICES-003 Issue 6	ANSI C63.4:2014	Class B	PASS
Conducted Emission (150kHz to 30MHz)	47 CFR PART 15, Subpart B ICES-003 Issue 6	ANSI C63.4:2014	Class B	PASS

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement Range (MHz)
Below 1.705	30
1.705 to 108	1000
108 to 500	2000
500 to 1000	5000
Above 1000	5th harmonic of the highest frequency or 40GHz, whichever is lower

Note:

The highest frequency of the internal sources of the EUT is 2474MHz

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 DETAILS OF E.U.T.....	5
4.2 DESCRIPTION OF SUPPORT UNITS.....	5
4.3 MEASUREMENT UNCERTAINTY.....	5
4.4 TEST LOCATION.....	6
4.5 TEST FACILITY.....	6
5 EQUIPMENT LIST	7
6 TEST RESULTS	8
6.1 CONDUCTED EMISSIONS MAINS TERMINALS, 150kHz TO 30MHz.....	8
6.1.1 <i>E.U.T. Operation</i>	9
6.1.2 <i>Measurement Data</i>	9
6.2 RADIATED EMISSIONS, 30MHz TO 25GHz.....	12
6.2.1 <i>E.U.T. Operation</i>	13
6.2.2 <i>Measurement Data</i>	14
7 PHOTOGRAPHS	18
7.1 CONDUCTED EMISSION TEST SETUP.....	18
7.2 RADIATED EMISSION TEST SETUP.....	19
7.3 EUT CONSTRUCTIONAL DETAILS.....	20

4 General Information

4.1 Details of E.U.T.

Power Supply: DC5.0V from PC

4.2 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
PC	Lenovo	ThinkPad E450c	Provide by lab	ID
AC/DC Adapter	Lenovo	ADLX65NLC3A	Provide by lab	DOC
Wireless Mouse	Mae	DX-PNC2019	Provide by client	/

4.3 Measurement Uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for **CQA** laboratory is reported:

Test	Range	Uncertainty	Notes
Radiated Emission	Below 1GHz	±5.12dB	(1)
Radiated Emission	Above 1GHz	±4.60dB	(1)
Conducted Disturbance	0.15~30MHz	±3.34dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.4 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.,
1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District,
Shenzhen, China

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **ISED No.: 22984**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

5 Equipment List


Radiated Emission					
Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
Horn Antenna	R&S	HF906	CQA-012	2018/9/26	2020/9/25
Bilog Antenna	R&S	HL562	CQA-011	2018/9/26	2020/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-060	2018/9/26	2020/9/25
EMI Test Receiver	R&S	ESR7	CQA-005	2018/9/26	2019/9/25
Spectrum analyzer	R&S	FSU26	CQA-038	2018/10/28	2019/10/27
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2018/9/26	2019/9/25
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2018/11/2	2019/11/1
Coaxial cable (1GHz~40GHz)	CQA	N/A	C019	2018/9/26	2019/9/25
Coaxial cable (9KHz~1GHz)	CQA	N/A	C020	2018/9/26	2019/9/25

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Instrument No.	Due Date
EMI Test Receiver	R&S	ESPI3	CQA-005	2018/9/26	2019/9/25
LISN	R&S	ENV216	CQA-003	2018/11/5	2019/11/4
Coaxial cable (9KHz~300MHz)	CQA	N/A	C009	2018/9/26	2019/9/25

6 Test Results

6.1 Conducted Emissions Mains Terminals, 150kHz to 30MHz

Test Requirement:	47 CFR PART 15, Subpart B ICES-003 Issue 6
Test Method:	ANSI C63.4
Frequency Range:	150kHz to 30MHz
Class / Severity:	Class B
Limit:	
0.15M-0.5MHz	66dB(dB μ V)-56dB(dB μ V) quasi-peak, 56dB(dB μ V)-46dB(dB μ V) average
0.5M-5MHz	56dB(dB μ V) quasi-peak, 46dB(dB μ V) average
5M-30MHz	60dB(dB μ V) quasi-peak, 50dB(dB μ V) average
Test Setup:	

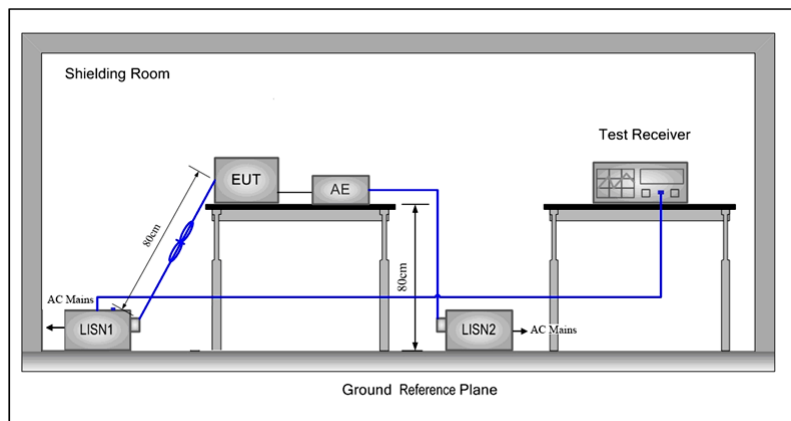

Test Procedure:

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

Detector:

Peak for pre-scan (9kHz Resolution Bandwidth)

Quasi-Peak if maximised peak within 6dB of Quasi-Peak limit

6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.0 °C Humidity: 55 % RH Atmospheric Pressure: 1015 mbar


EUT Operation: Mode a: Data exchange

Test Status: Pretest the EUT at different test mode and found the Mode a which is worst case, the test worst case mode is recorded in the report.

Test voltage: 120V/60Hz

6.1.2 Measurement Data

Mode a:
Live line

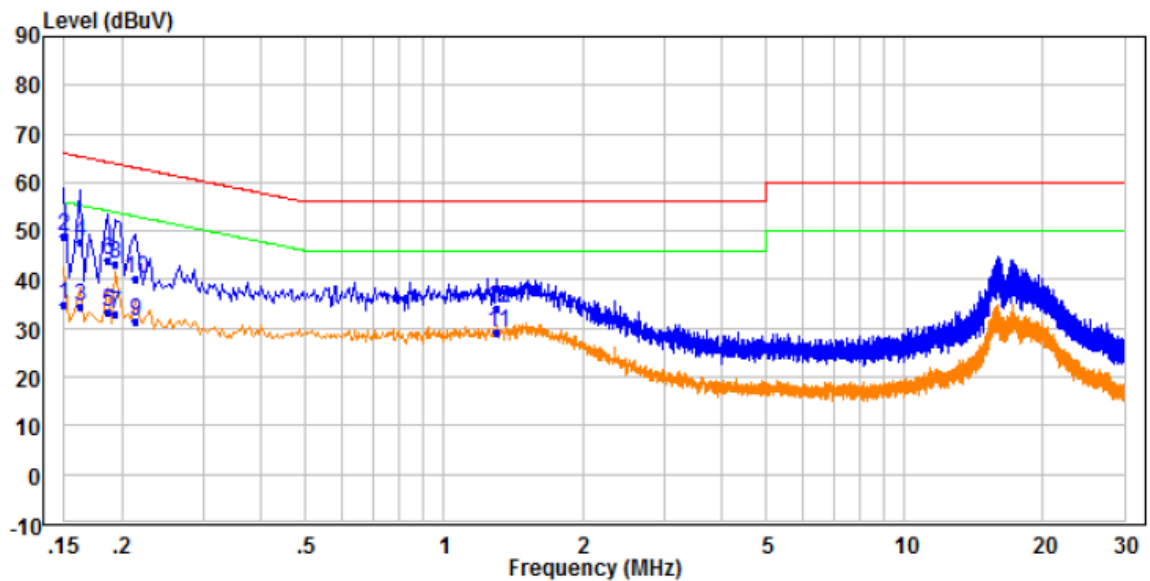


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.150	25.46	9.49	34.95	56.00	-21.05	Average	Line
2	0.150	39.41	9.49	48.90	66.00	-17.10	QP	Line
3	0.162	25.08	9.49	34.57	55.36	-20.79	Average	Line
4	0.162	38.27	9.49	47.76	65.36	-17.60	QP	Line
5	0.186	23.67	9.49	33.16	54.21	-21.05	Average	Line
6	0.186	34.56	9.49	44.05	64.21	-20.16	QP	Line
7	0.194	23.44	9.49	32.93	53.86	-20.93	Average	Line
8	0.194	33.69	9.49	43.18	63.86	-20.68	QP	Line
9	0.214	22.06	9.49	31.55	53.05	-21.50	Average	Line
10	0.214	30.55	9.49	40.04	63.05	-23.01	QP	Line
11	1.306	19.68	9.53	29.21	46.00	-16.79	Average	Line
12	1.306	24.60	9.53	34.13	56.00	-21.87	QP	Line

Remark:

1. The following Peak, Quasi-Peak and Average measurements were performed on the EUT:
2. Correct Factor= LISN Factor + Cable Loss
3. Final Test Level =Receiver Reading + Correct Factor.
4. Over Limit= Final Test Level - Limit

Mode a:
Neutral line

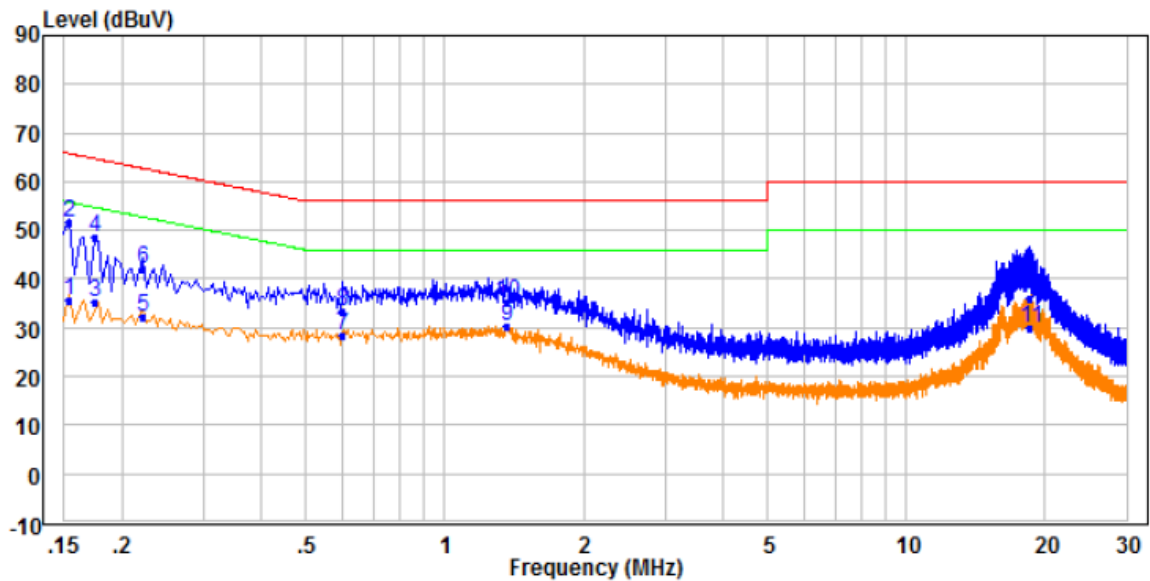

	Read	Limit	Over			Pol/Phase	
Freq	Level	Factor	Level	Line	Limit	Remark	
MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.154	26.16	9.48	35.64	55.78	-20.14 Average	Neutral
2 PP	0.154	42.09	9.48	51.57	65.78	-14.21 QP	Neutral
3	0.174	25.61	9.48	35.09	54.77	-19.68 Average	Neutral
4	0.174	39.13	9.48	48.61	64.77	-16.16 QP	Neutral
5	0.222	22.55	9.48	32.03	52.74	-20.71 Average	Neutral
6	0.222	32.53	9.48	42.01	62.74	-20.73 QP	Neutral
7	0.602	18.70	9.71	28.41	46.00	-17.59 Average	Neutral
8	0.602	23.50	9.71	33.21	56.00	-22.79 QP	Neutral
9 AV	1.358	20.54	9.72	30.26	46.00	-15.74 Average	Neutral
10	1.358	25.35	9.72	35.07	56.00	-20.93 QP	Neutral
11	18.525	19.74	10.02	29.76	50.00	-20.24 Average	Neutral
12	18.525	25.98	10.02	36.00	60.00	-24.00 QP	Neutral

Remark:

1. The following Peak, Quasi-Peak and Average measurements were performed on the EUT:
2. Correct Factor= LISN Factor + Cable Loss
3. Final Test Level =Receiver Reading + Correct Factor.
4. Over Limit= Final Test Level - Limit

6.2 Radiated Emissions, 30MHz to 25GHz

Test Requirement:	47 CFR PART 15, Subpart B
Test Method:	ANSI C63.4
Frequency Range:	30MHz to 25GHz
Measurement Distance:	3m
Class:	Class B
Limit:	40.0 dB μ V/m between 30MHz & 88MHz
	43.5 dB μ V/m between 88MHz & 216MHz
	46.0 dB μ V/m between 216MHz & 960MHz / 54.0 dB μ V/m above 960MHz
The highest frequency:	74 dB μ V/m above 960MHz for peak
	54 dB μ V/m above 960MHz for average

Test Setup:

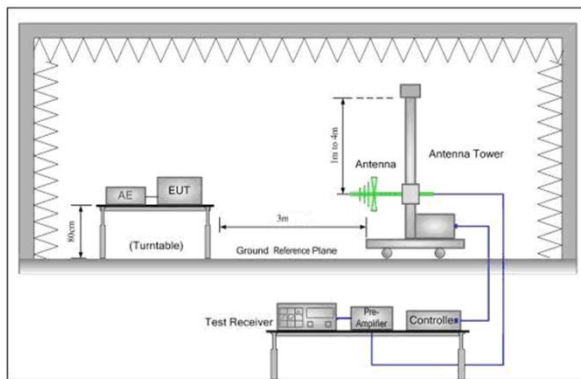


Figure 1. 30MHz to 1GHz

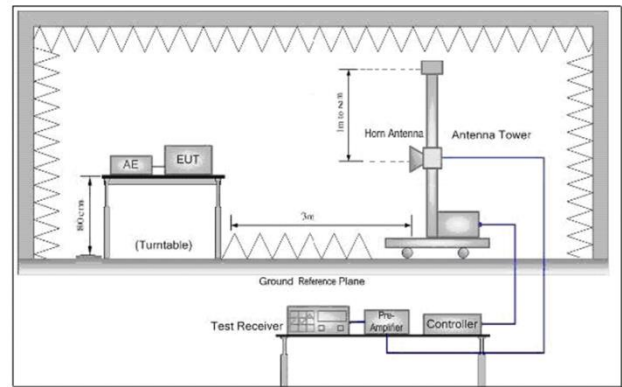


Figure 2. Above 1GHz

Test Procedure:

- 1) The radiated emissions were tested in a semi-anechoic chamber.
 - 2) The EUT is placed on a turntable, which is 0.8m above ground plane.
 - 3) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
 - 4) EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
 - 5) Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
 - 6) And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
 - 7) Repeat above procedures until the measurements for all frequencies are complete.
2. Above 1GHz test procedure as below:
- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and receiving antenna is moved from 1m to 4m.

Detector:

Peak for pre-scan (120kHz resolution bandwidth)
Quasi-Peak if maximised peak within 6dB of limit

6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22.0 °C Humidity: 54 % RH Atmospheric Pressure: 1015 mbar

EUT Operation: Mode a: Data exchange


Test Status: Pretest the EUT at different test mode and found the Mode a which is worst case, the test worst case mode is recorded in the report.

6.2.2 Measurement Data

Below 1GHz:

Mode a

Vertical

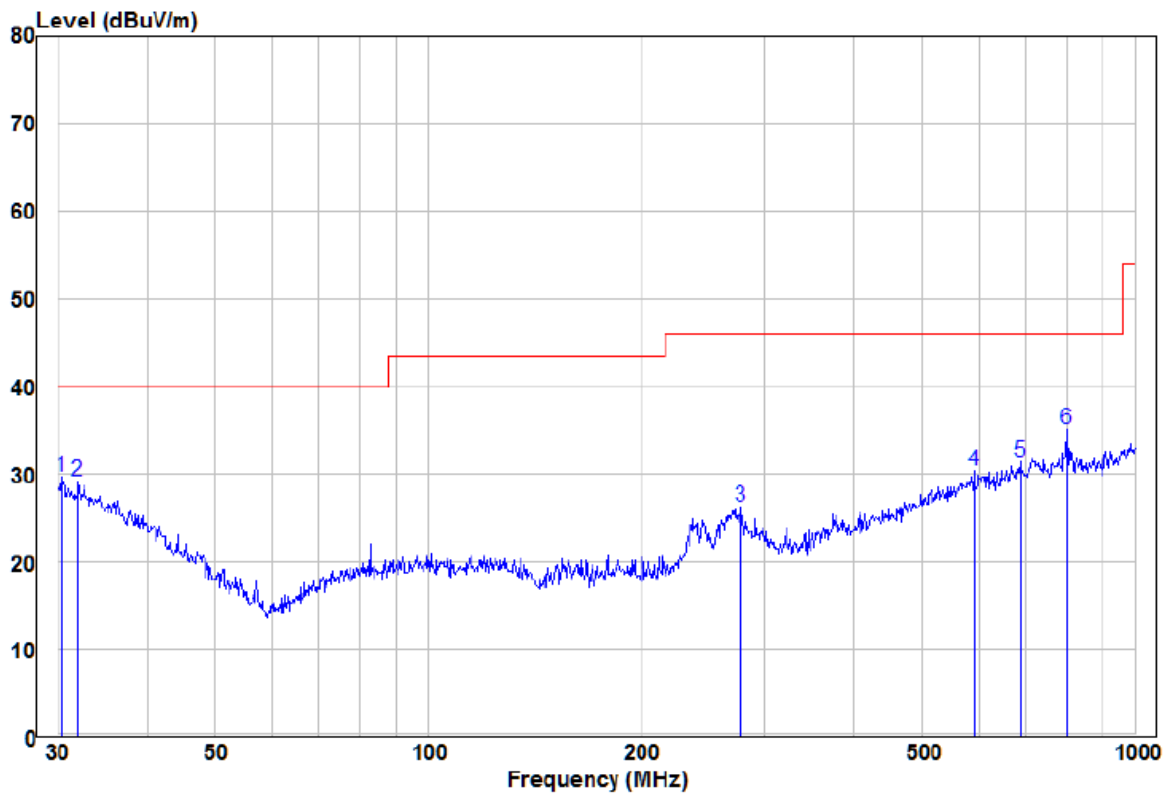

	Read Freq	Read Level	Factor	Level	Limit	Over	Remark	Pol/Phase	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			
1	pp	30.42	1.57	28.16	29.73	40.00	-10.27	Peak	VERTICAL
2		31.95	1.51	27.61	29.12	40.00	-10.88	Peak	VERTICAL
3		277.09	5.41	20.88	26.29	46.00	-19.71	Peak	VERTICAL
4		590.97	2.18	28.15	30.33	46.00	-15.67	Peak	VERTICAL
5		687.15	1.63	29.78	31.41	46.00	-14.59	Peak	VERTICAL
6		798.98	4.37	30.75	35.12	46.00	-10.88	Peak	VERTICAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic

equation with a sample calculation is as follows:


Factor= Antenna Factor + Cable Factor – Pre-amplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Mode a:

Horizontal

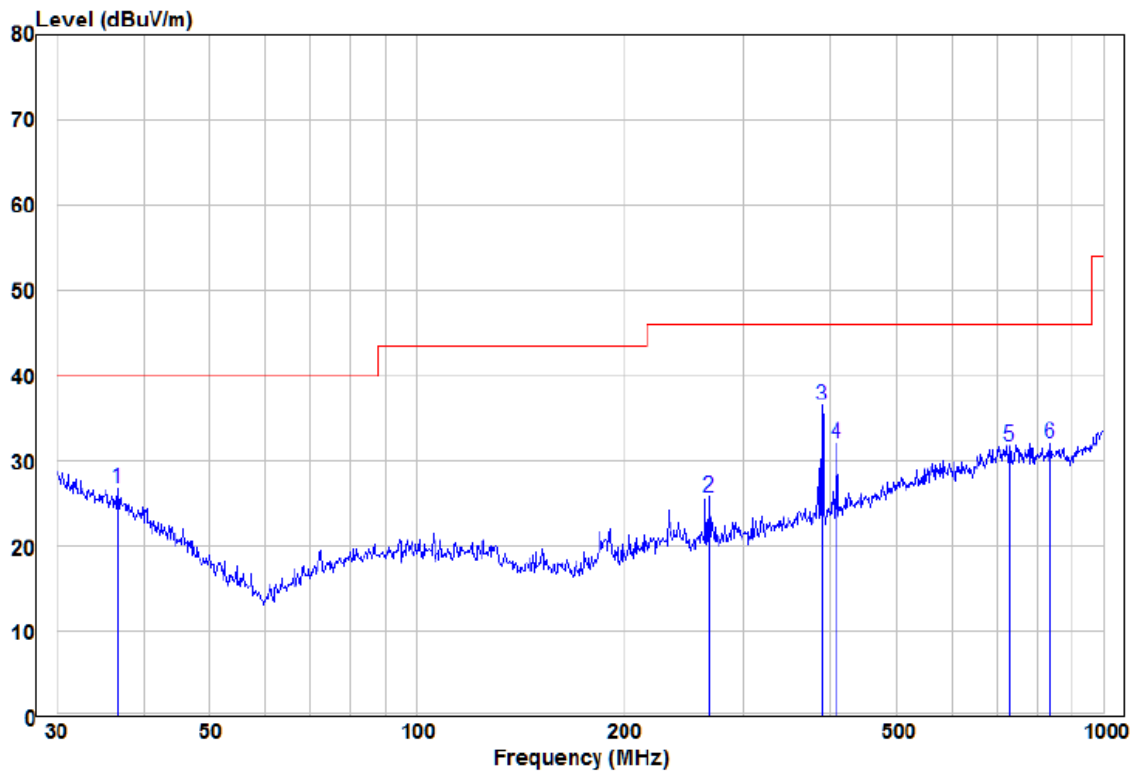

	Read Freq	Read Level	Factor	Limit Level	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	36.77	1.00	25.86	26.86	40.00	-13.14	Peak HORIZONTAL
2	266.61	5.29	20.53	25.82	46.00	-20.18	Peak HORIZONTAL
3 pp	389.35	12.69	23.83	36.52	46.00	-9.48	Peak HORIZONTAL
4	408.95	7.73	24.36	32.09	46.00	-13.91	Peak HORIZONTAL
5	729.36	1.58	30.22	31.80	46.00	-14.20	Peak HORIZONTAL
6	836.24	1.60	30.55	32.15	46.00	-13.85	Peak HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic

equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,


Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Above 1GHz

Mode a:

Horizontal

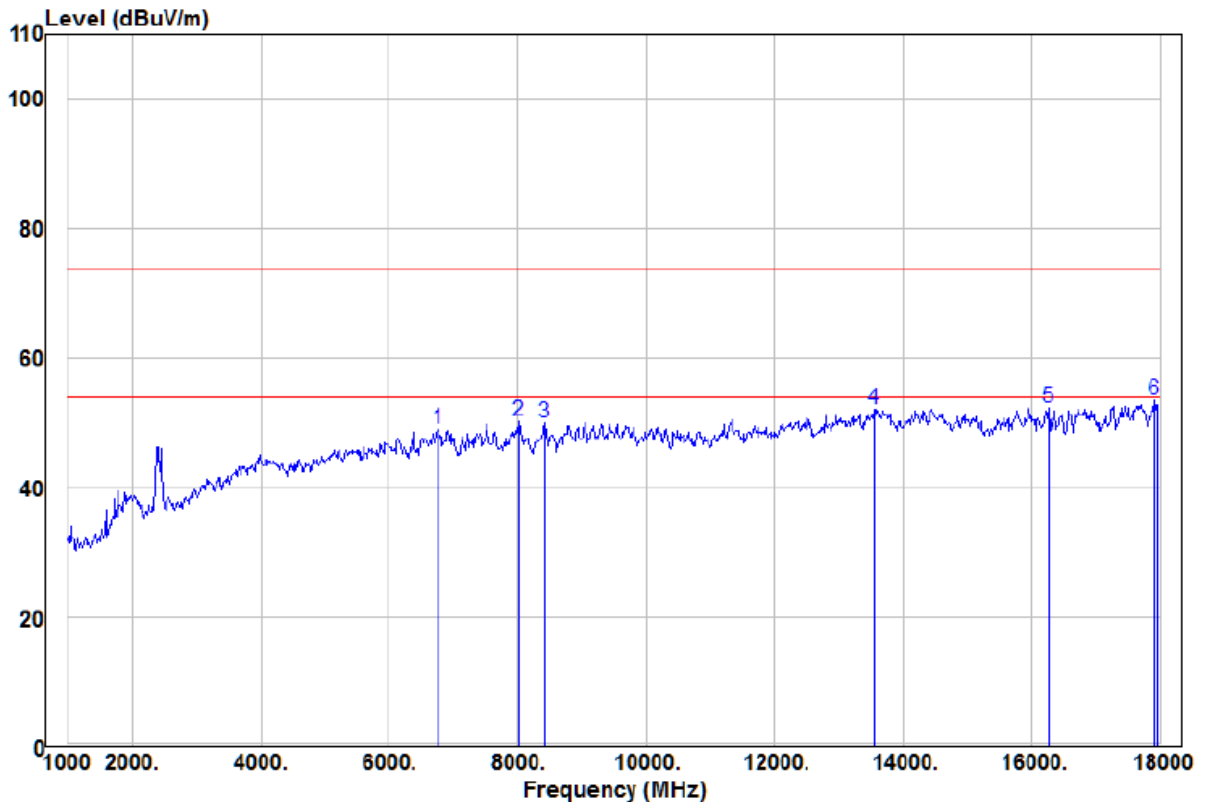


	Read Freq	Read Level	Factor	Limit Level	Over Limit	Over Limit	Remark	Pol/Phase
	MHZ	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	6780.00	41.77	7.36	49.13	74.00	-24.87	Peak	HORIZONTAL
2	8021.00	43.00	7.10	50.10	74.00	-23.90	Peak	HORIZONTAL
3	8429.00	42.66	7.23	49.89	74.00	-24.11	Peak	HORIZONTAL
4	13546.00	42.42	9.66	52.08	74.00	-21.92	Peak	HORIZONTAL
5	16266.00	39.25	13.17	52.42	74.00	-21.58	Peak	HORIZONTAL
6 pp	17915.00	36.32	17.18	53.50	74.00	-20.50	Peak	HORIZONTAL

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 30M to 25GHz, the disturbance above 18GHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.
- 3) 2408~2474MHz was the fundamental frequency range

Mode a:

Vertical

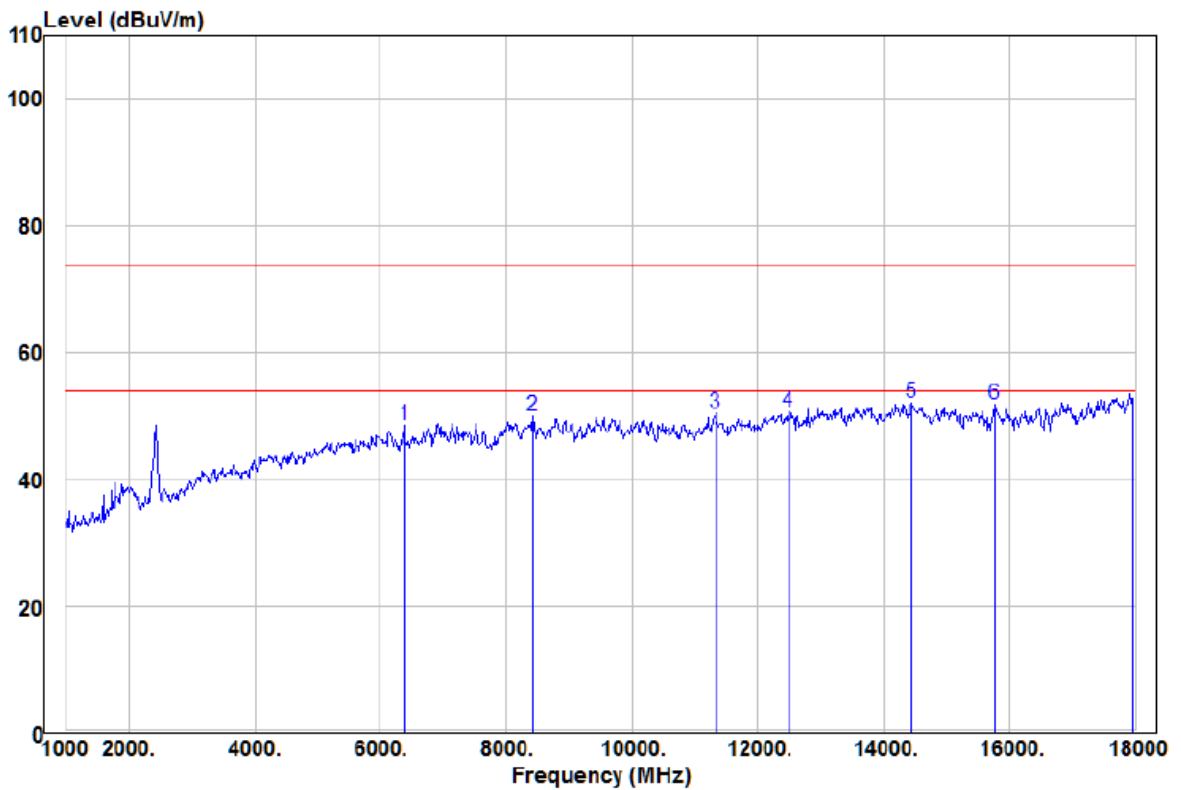

	Read Freq	Read Level	Read Factor	Limit Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	6389.00	44.08	4.56	48.64	74.00	-25.36	Peak	VERTICAL
2	8429.00	42.66	7.23	49.89	74.00	-24.11	Peak	VERTICAL
3	11319.00	43.68	6.69	50.37	74.00	-23.63	Peak	VERTICAL
4	12475.00	43.24	7.38	50.62	74.00	-23.38	Peak	VERTICAL
5	pp 14447.00	41.94	10.06	52.00	74.00	-22.00	Peak	VERTICAL
6	15773.00	38.68	13.06	51.74	74.00	-22.26	Peak	VERTICAL

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 30M to 25GHz, the disturbance above 10GHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.
- 3) 2402~2480MHz was the fundamental frequency range