

FCC Radio Test Report

FCC ID: 2AANU-B8

IC: 11260A-B8

This report concerns (check one): Original Grant Class II Change

Project No. : 1606C249B
Equipment : Soundbar speaker with Dolby Atmos
Model Name For FCC : B8/37, B8/F7, B8/**(the "***"can be 37 or F7 for market use)
Model Name For IC : B8/37
Applicant : Gibson Innovations Limited
Address : 5/F Philips Electronics Building 5 Science Park East Ave, HK Science Park, Shatin NT, Hong Kong

Date of Receipt : Dec. 27, 2016
Date of Test : Dec. 27, 2016 ~ Feb. 21, 2017
Issued Date : Feb. 22, 2017
Tested by : BTL Inc.

Testing Engineer : Vitas Zhou
(Vitas Zhou)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3,Jinshagang 1st Road, Shixia,Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents**Page**

1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 .GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 EUT TEST CONDITIONS	13
4.1.7 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 RADIATED EMISSION LIMITS	14
4.2.2 TESTPROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TESTSETUP	16
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 EUT TEST CONDITIONS	17
4.2.7 TEST RESULTS (9KHZ 30MHZ)	17
4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)	17
4.2.9 TEST RESULTS (ABOVE1000 MHZ)	17
5 . BANDWIDTH TEST	18
5.1 TEST PROCEDURE	18
5.2 DEVIATION FROM STANDARD	18
5.3 TEST SETUP	18
5.4 EUT OPERATION CONDITIONS	18
5.5 EUT TEST CONDITIONS	18
5.6 TEST RESULTS	18
6 . MEASUREMENT INSTRUMENTS LIST AND SETTING	19
7 . EUT TEST PHOTO	21

Table of Contents	Page
ATTACHMENT A - CONDUCTED EMISSION	25
ATTACHMENT B -RADIATED EMISSION (9KHZ to 30MHZ)	28
ATTACHMENT C -RADIATED EMISSION (30MHZ TO 1000MHZ)	33
ATTACHMENT D -RADIATED EMISSION (ABOVE 1000MHZ)	46
ATTACHMENT E - BANDWIDTH	71

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FICP-2-1606C249B	Original Issue.	Feb. 22, 2017

1. CERTIFICATION

Equipment : Soundbar speaker with Dolby Atmos
Brand Name : Philips
Model Name : B8/37, B8/F7, B8/**(the "****"can be 37 or F7 for market use)
For FCC
Model Name : B8/37
For IC
Applicant : Gibson Innovations Limited
Manufacturer : Gibson Innovations Limited
Address : 5/F Philips Electronics Building 5 Science Park East Ave, HK Science Park,
Shatin NT, Hong Kong
Date of Test : Dec. 27, 2016 ~ Feb. 21, 2017
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart C (15.249)/ ANSI C63.10-2013
Canada RSS-210 Issue 9, August 2016
RSS-GEN Issue 4, Nov 2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FICP-2-1606C249B) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart C (15.249)/
Canada RSS-210 Issue 9, August 2016; RSS-GEN Issue 4, Nov 2014

Standard Section		Test Item	Judgment	Remark
15.207(a)	RSS-GEN Issue 4 8.8	Conducted Emission	PASS	
15.205	RSS-210 Issue 9 B.10	Restricted Band of Operation	PASS	
15.209 15.249(a)	RSS-210 Issue 9 B.10	Radiated Emissions	PASS	
15.215(c)	-	20dB Bandwidth Test	PASS	

NOTE:

(1)"N/A" denotes test is not applicable to this device.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

BTL's test firm number for IC: 4428B-1

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cisp} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)
DG-C02	CISPR	150KHz~30MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U ,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U ,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3.GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Soundbar speaker with Dolby Atmos	
Brand Name	Philips	
Model Name for FCC	B8/37, B8/F7, B8/**(the "***can be 37 or F7 for market use)	
Model Name for IC	B8/37	
Model Difference	The "*** can be 37 or F7 for market use.	
Product Description	Operation Frequency	5740MHz ~ 5840MHz
	Modulation Technology	QPSK
	Data rate	100Kbps
	Field Strength	96.32dBuV/m(Peak Max) 91.35dBuV/m(AVG Max)
Power Source	DC voltage supplied from AC/DC adapter. Brand / Model: PHILIPS / DYS902-190473W	
Power Rating	I/P: 100-240V~ 50/60Hz 1.5 MAX O/P: 19.0V---4.73A	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Channel List:

Channel	Frequency (MHz)
01	5743
02	5792
03	5840

3 Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Printed	N/A	2.85
2	N/A	N/A	Printed	N/A	2.85

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode


For Conducted Test	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode

Note:

- (1) The measurements are performed at the high, low available channels.

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

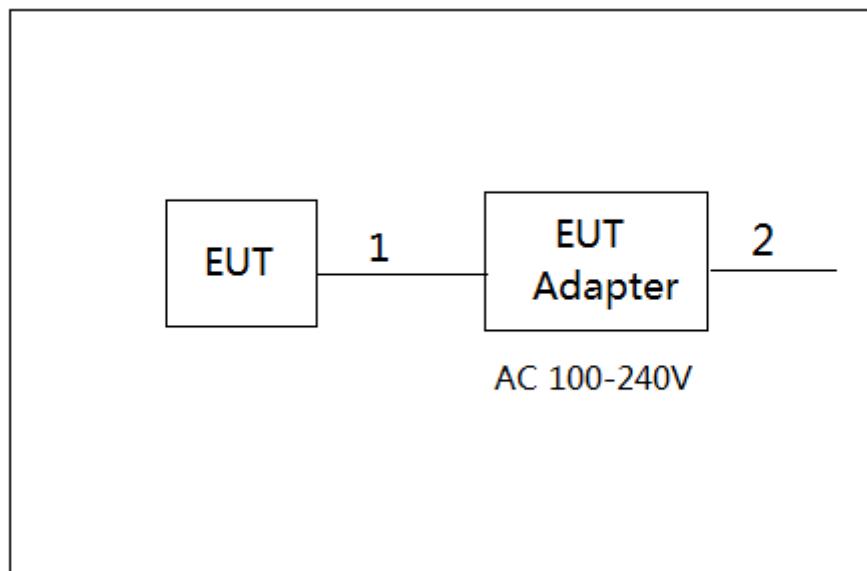

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1m	DC Cable
2	NO	NO	1m	AC Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

(1) The limit of " * " decreases with the logarithm of the frequency

(2) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the groundplane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

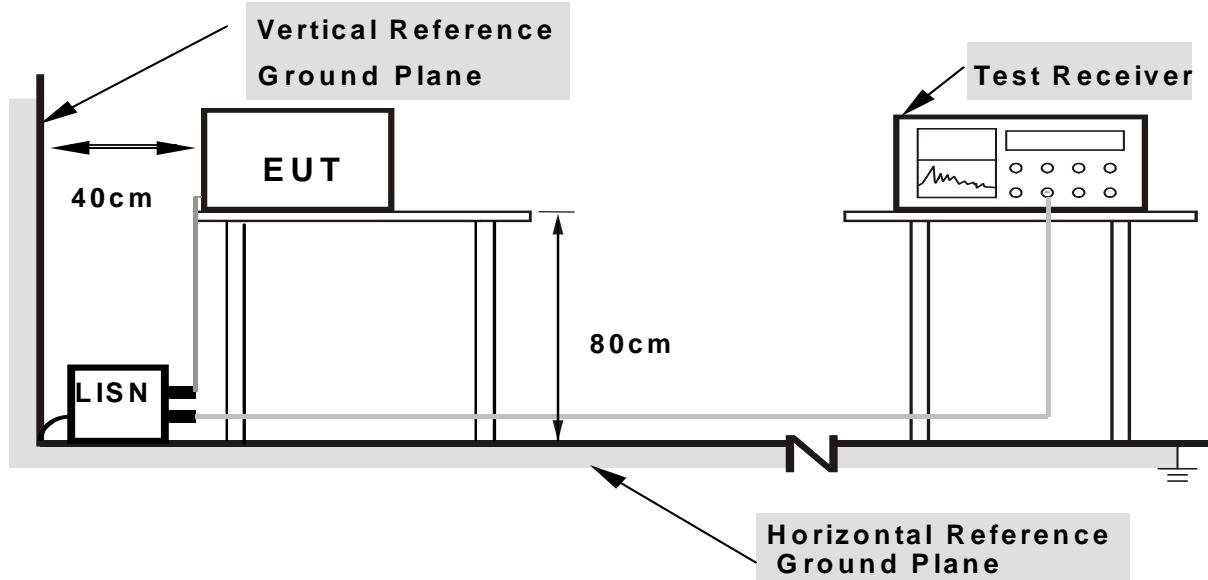

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it).

4.1.6 EUT TEST CONDITIONS

Temperature: N/A

Relative Humidity: N/A

Test Voltage: N/A

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of **Note**. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (FCC 15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.209)

FREQUENCY (MHz)	(dBuV/m) (at 3m)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC Part 15.249)

FCC Part15 (15.249) , Subpart C	
Limit	Frequency Range(MHz)
Field strength of fundamental 50000 μ V/m (94 dB μ V/m) @ 3 m	2400-2483.5
Field strength of harmonics 500 μ V/m (54 dB μ V/m) @ 3 m	Above 2483.5

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz for PK/AVG detector
Start ~ Stop Frequency	90kHz~110kHz for QP detector
Start ~ Stop Frequency	110kHz~490kHz for PK/AVG detector
Start ~ Stop Frequency	490kHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TESTPROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TESTSETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

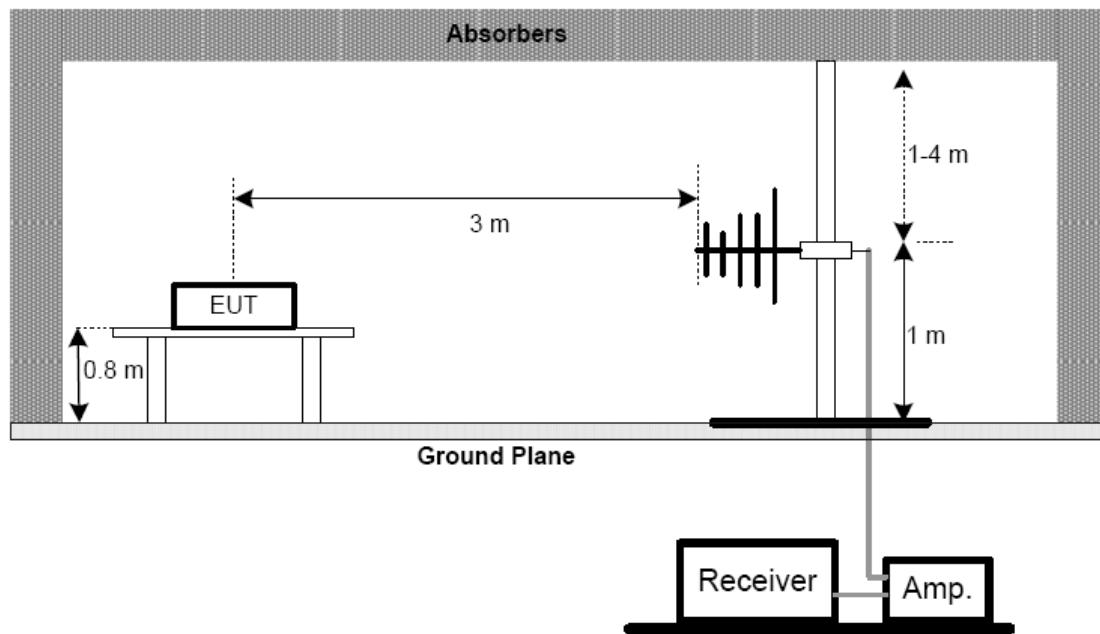

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

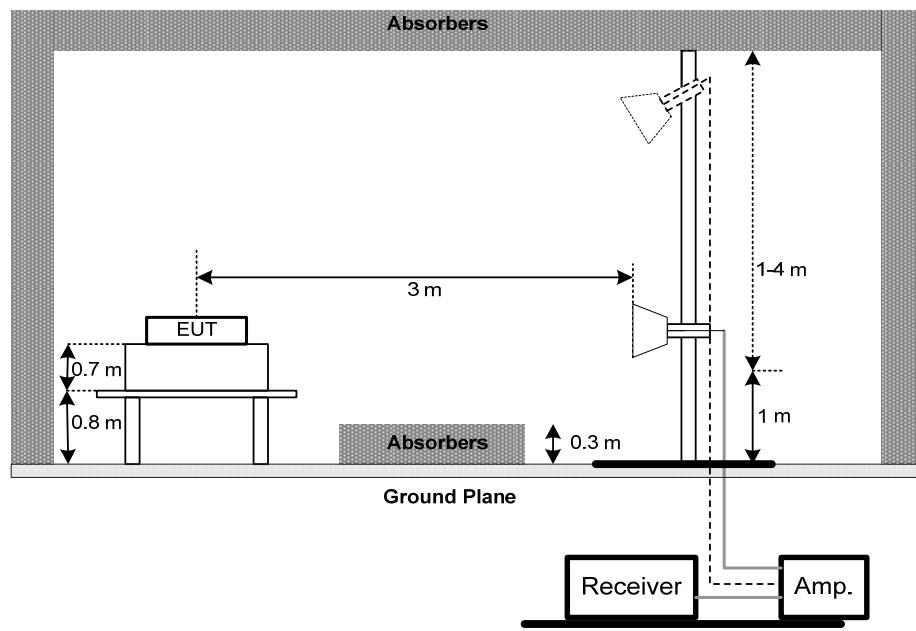

(C) For radiated emissions below 30MHz

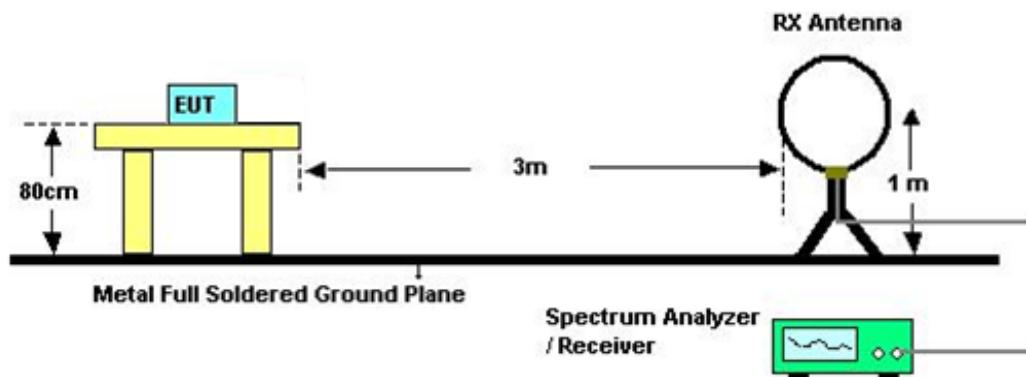

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 26°C

Relative Humidity: 58%

Test Voltage: DC 1.5V

4.2.7 TEST RESULTS (9KHZ 30MHZ)

Please refer to the Attachment B.

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);.
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor..

4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment C

4.2.9 TEST RESULTS (ABOVE1000 MHZ)

Please refer to the Attachment D

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.2 DEVIATION FROM STANDARD

No deviation.

5.3 TEST SETUP



5.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.5 EUT TEST CONDITIONS

Temperature: 26°C

Relative Humidity: 58%

Test Voltage: DC 1.5V

5.6 TEST RESULTS

Please refer to the Attachment E

6. MEASUREMENT INSTRUMENTS LIST AND SETTING

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Oct. 20, 2017
3	Receiver	AGILENT	N9038A	MY52130039	Sep. 04, 2017
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 26, 2017
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Antenna	ETS	3115	00075789	Mar. 27, 2017
8	Amplifier	Agilent	8449B	3008A02274	Mar. 10, 2017
9	Receiver	AGILENT	N9038A	MY52130039	Oct. 10, 2017
10	Test Cable	emci	EMC104-SM-SM-10000(1GHz - 26.5GHz)	C-68	Jun. 26, 2017
11	Controller	CT	SC100	N/A	N/A
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 23, 2017
13	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 27, 2017
14	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 06, 2017
15	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 10, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

7. EUT TEST PHOTO

Conducted Measurement Photos



Radiated Measurement Photos

9KHz to 30MHz



Radiated Measurement Photos

30MHz to 1000MHz



Radiated Measurement Photos


Above 1000MHz



ATTACHMENT A - CONDUCTED EMISSION


Test Mode: TX Mode

Line

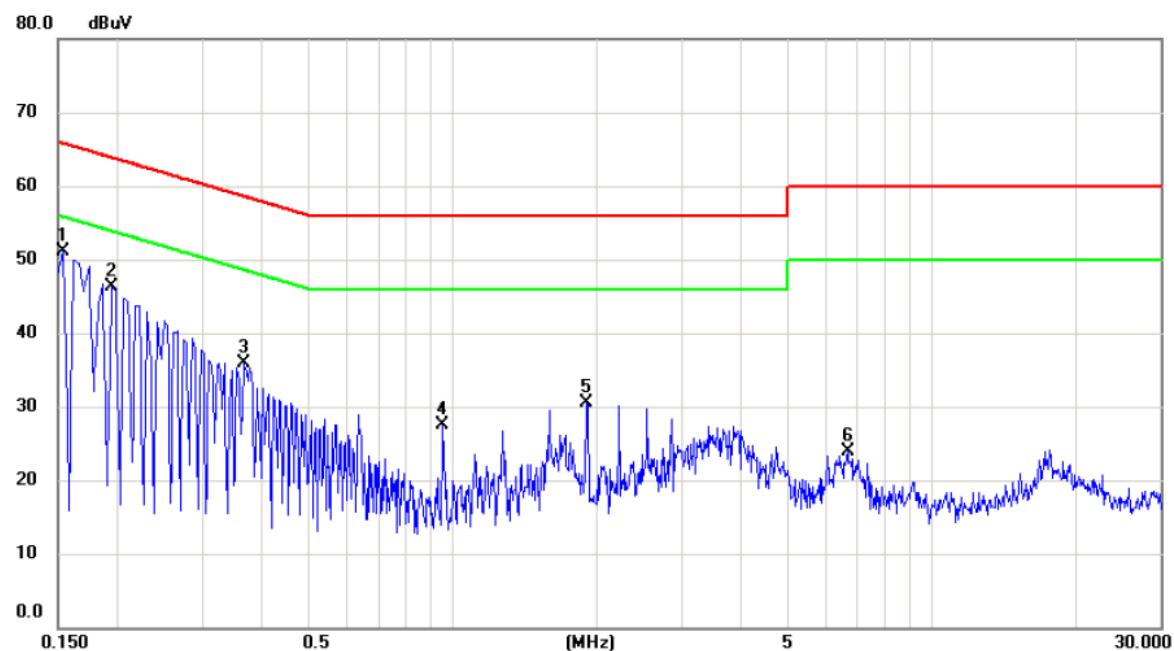

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	Detector	Comment
1	*	0.1540	41.61	9.57	51.18	65.78	-14.60	peak
2		0.1940	36.75	9.57	46.32	63.86	-17.54	peak
3		0.3660	26.29	9.58	35.87	58.59	-22.72	peak
4		0.9540	17.73	9.84	27.57	56.00	-28.43	peak
5		1.9060	20.43	10.00	30.43	56.00	-25.57	peak
6		6.6820	13.49	10.38	23.87	60.00	-36.13	peak

Test Mode: TX Mode

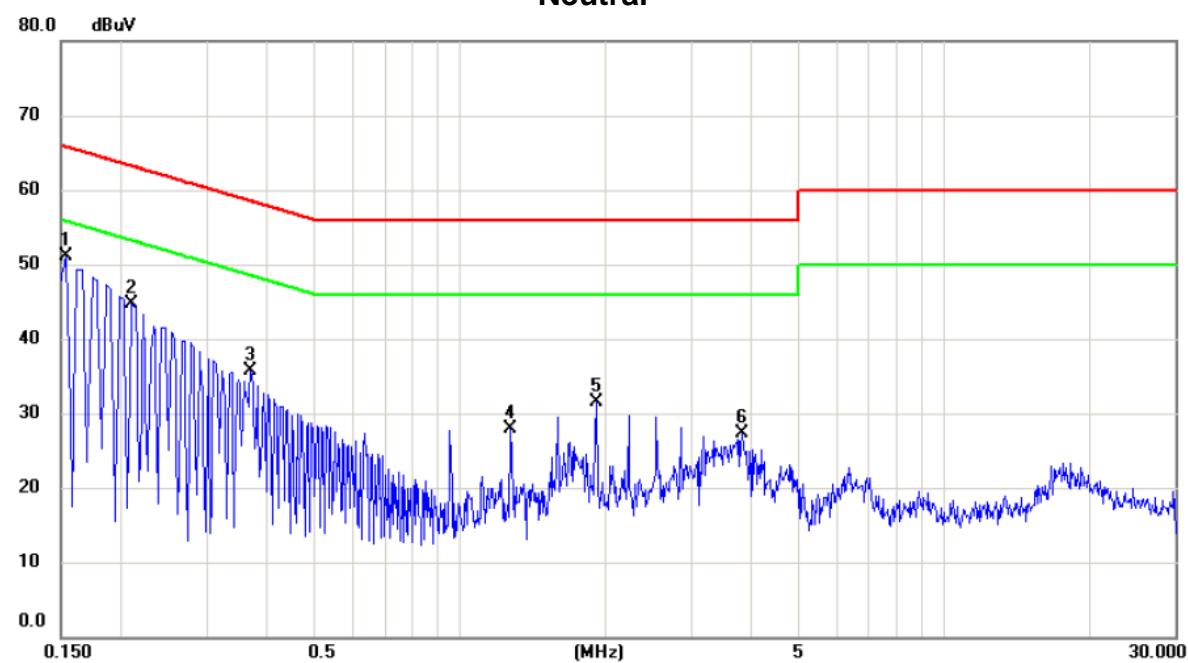
Neutral

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1540	41.50	9.55	51.05	65.78	-14.73	peak	
2		0.2100	35.21	9.57	44.78	63.21	-18.43	peak	
3		0.3700	26.07	9.54	35.61	58.50	-22.89	peak	
4		1.2740	18.11	9.76	27.87	56.00	-28.13	peak	
5		1.9100	21.68	9.80	31.48	56.00	-24.52	peak	
6		3.8220	17.15	10.06	27.21	56.00	-28.79	peak	

ATTACHMENT B -RADIATED EMISSION (9KHZ to 30MHZ)

Test Mode: TX Mode


Ant 0°

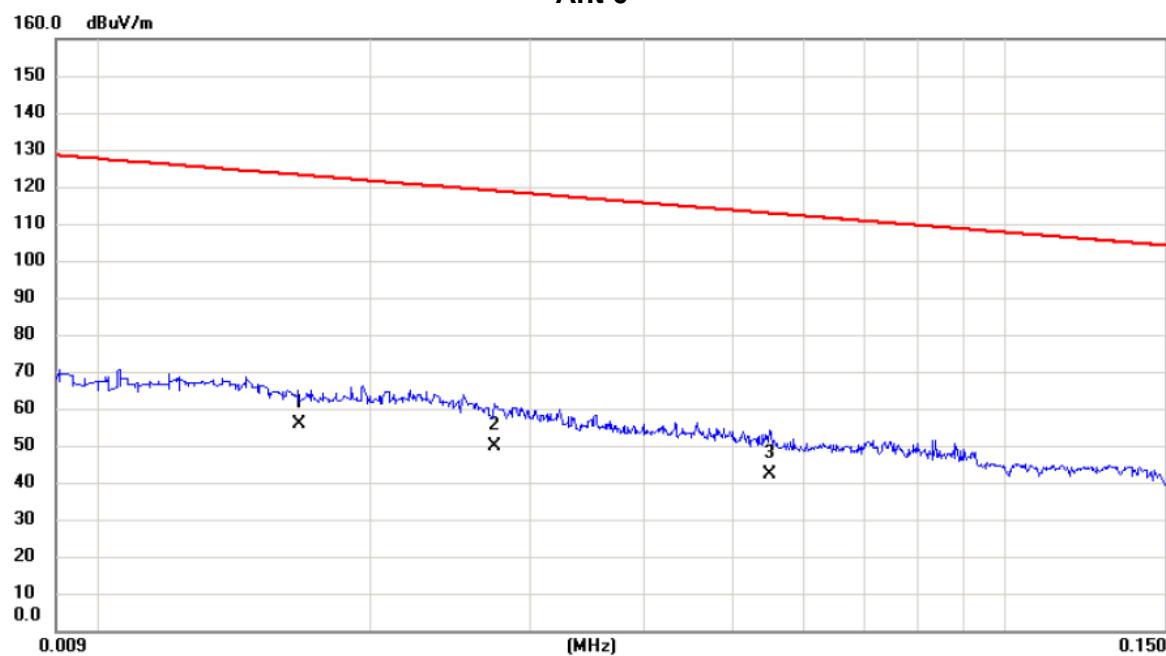

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0167	31.90	23.72	55.62	123.15	-67.53	AVG	
2		0.0274	27.20	22.61	49.81	118.85	-69.04	AVG	
3		0.0550	22.40	19.77	42.17	112.80	-70.63	AVG	

Test Mode: TX Mode


Ant 0°

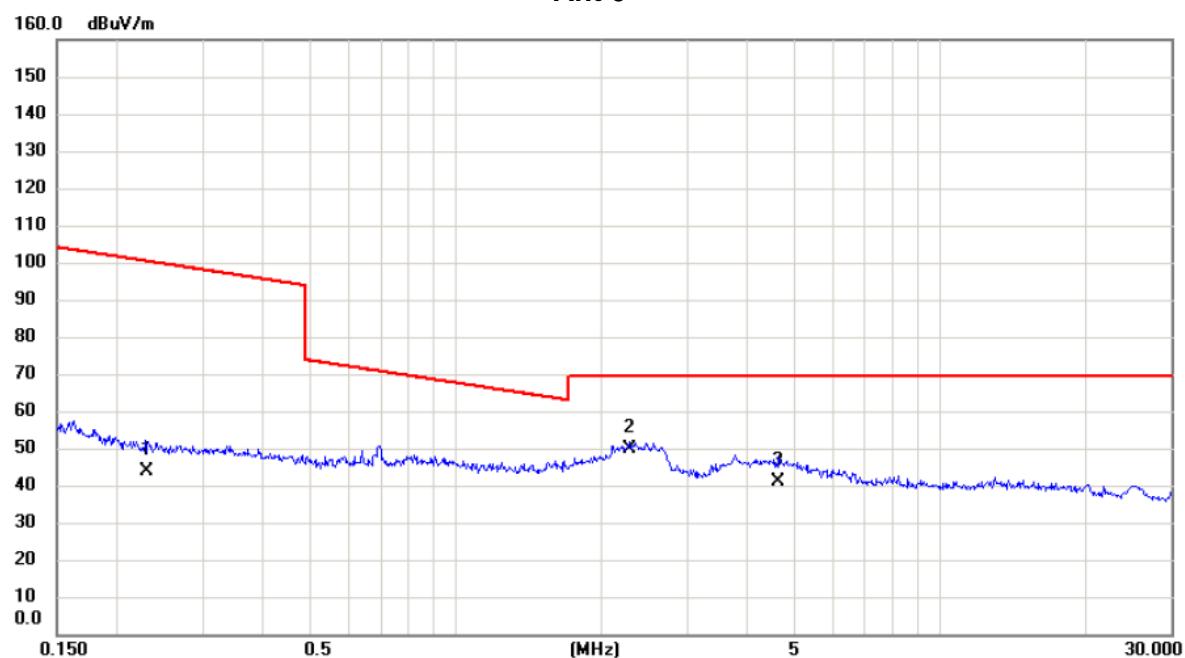

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.2292	25.33	18.67	44.00	100.40	-56.40	AVG	
2	*	2.2847	32.16	17.54	49.70	69.54	-19.84	QP	
3		4.6468	23.60	17.41	41.01	69.54	-28.53	QP	

Test Mode: TX Mode


Ant 90°

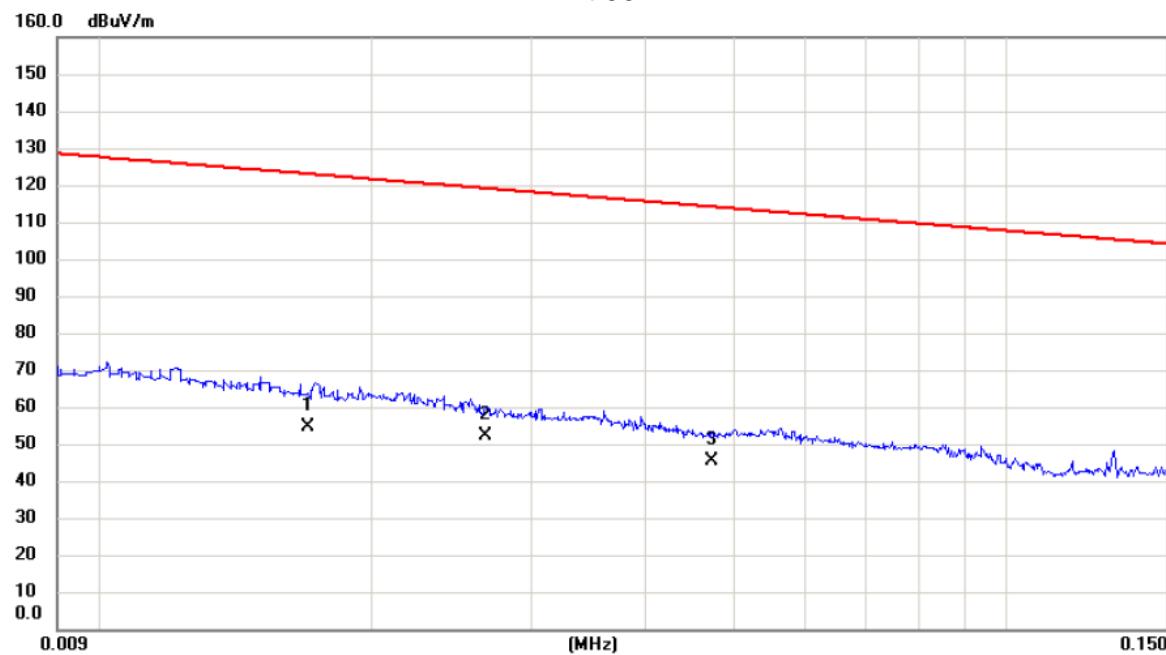

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		0.0170	31.03	23.70	54.73	123.00	-68.27	AVG
2	*	0.0267	29.56	22.69	52.25	119.07	-66.82	AVG
3		0.0473	25.07	20.15	45.22	114.11	-68.89	AVG

Test Mode: TX Mode


Ant 90°

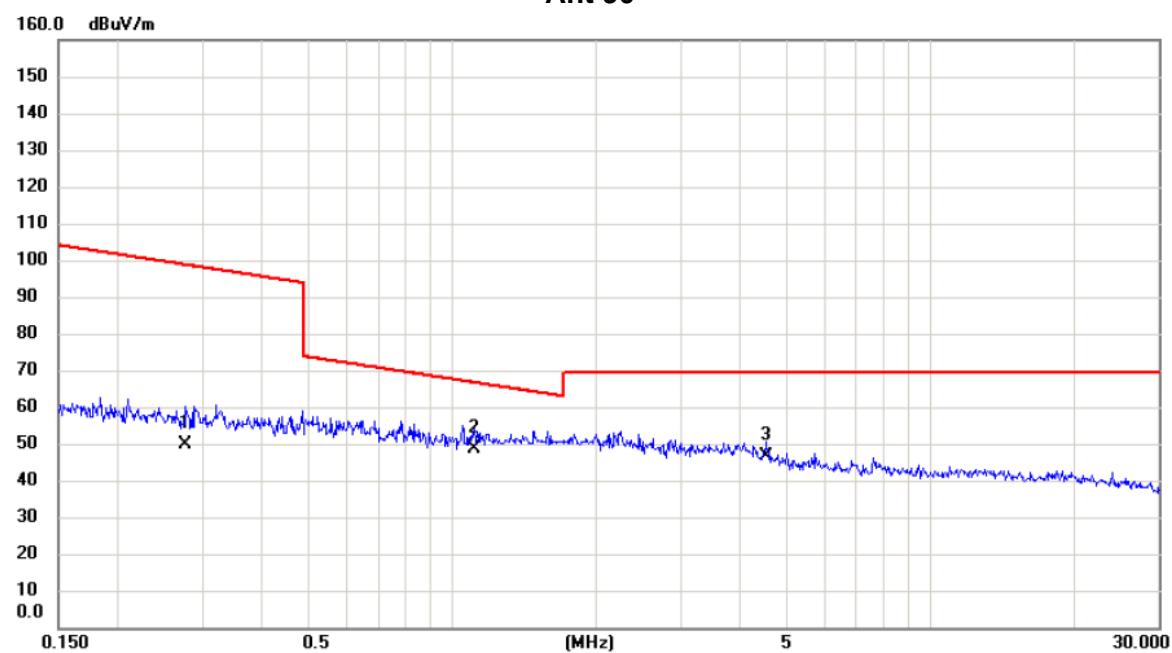

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		0.2773	31.03	18.62	49.65	98.75	-49.10	AVG
2	*	1.1114	30.86	17.70	48.56	66.69	-18.13	QP
3		4.5254	28.76	17.67	46.43	69.54	-23.11	QP


ATTACHMENT C -RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: TX Mode_5743 MHz – Ant 1

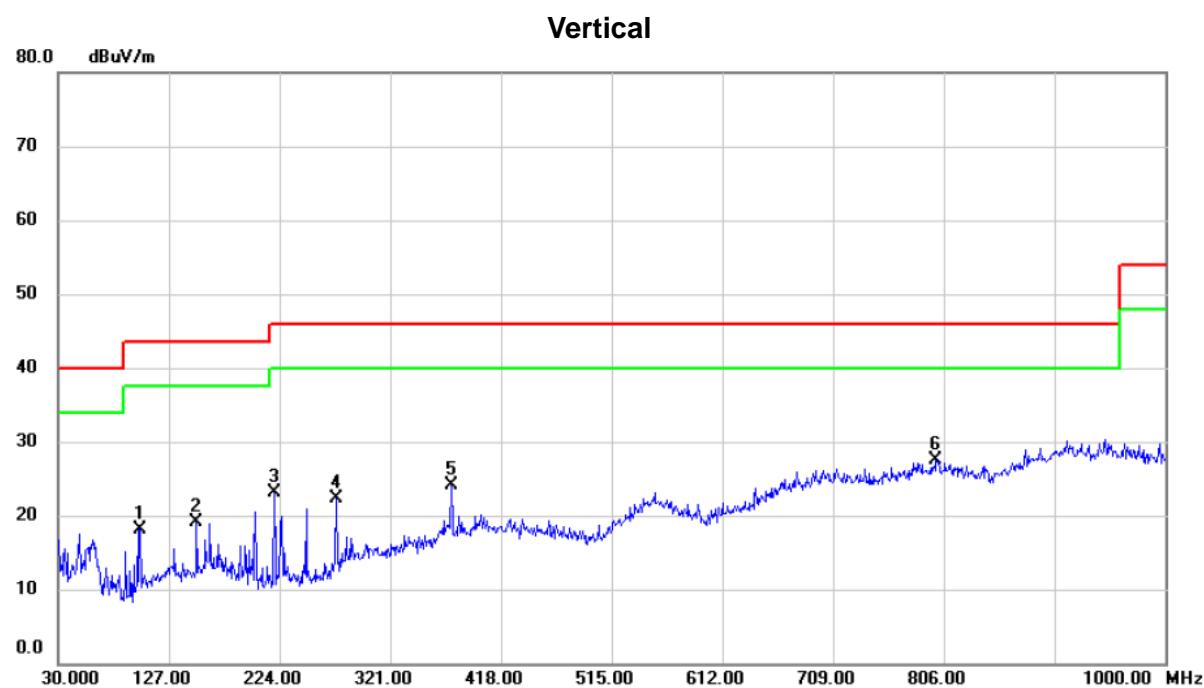


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		101.780	33.34	-15.32	18.02	43.50	-25.48	peak	
2		151.250	31.85	-12.84	19.01	43.50	-24.49	peak	
3		219.150	37.49	-14.29	23.20	46.00	-22.80	peak	
4		273.470	35.17	-12.94	22.23	46.00	-23.77	peak	
5		374.350	33.68	-9.55	24.13	46.00	-21.87	peak	
6 *		799.210	27.22	0.23	27.45	46.00	-18.55	peak	

Test Mode: TX Mode_5743 MHz – Ant 1

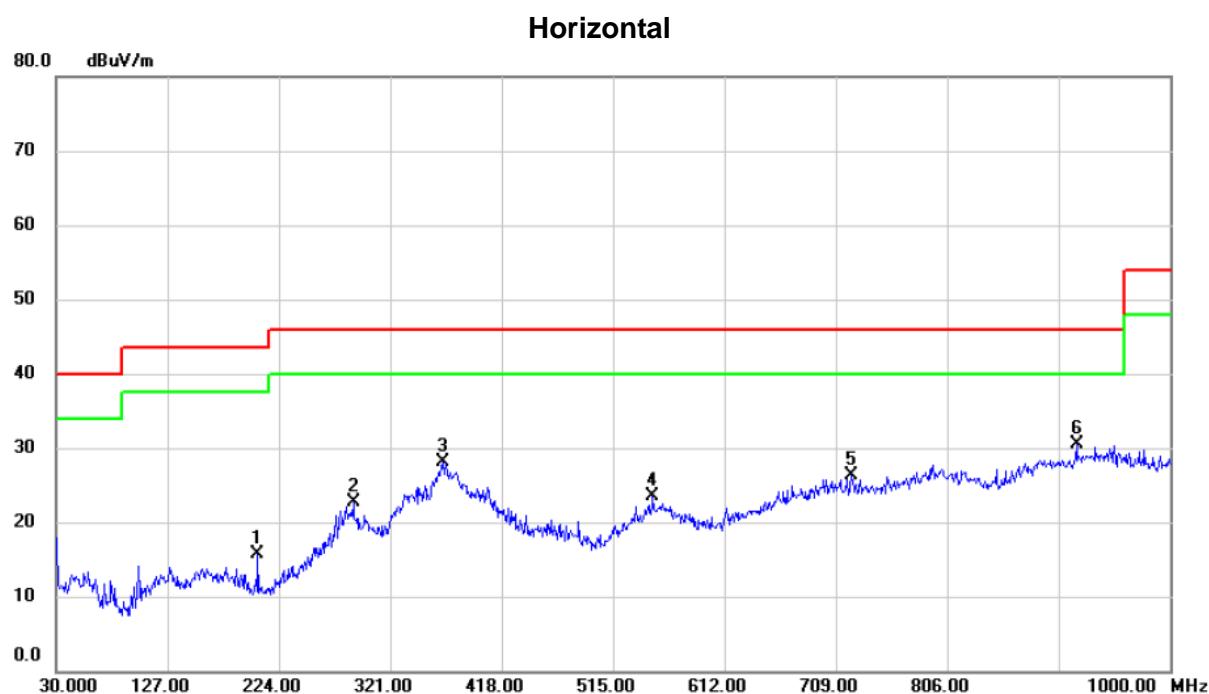

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1		205.570	30.27	-14.55	15.72	43.50	-27.78	peak	
2		288.990	34.06	-11.32	22.74	46.00	-23.26	peak	
3		366.590	38.24	-10.08	28.16	46.00	-17.84	peak	
4		549.920	27.97	-4.55	23.42	46.00	-22.58	peak	
5		722.580	28.30	-2.04	26.26	46.00	-19.74	peak	
6 *		918.520	27.85	2.56	30.41	46.00	-15.59	peak	

Test Mode: TX Mode_5792 MHz – Ant 1

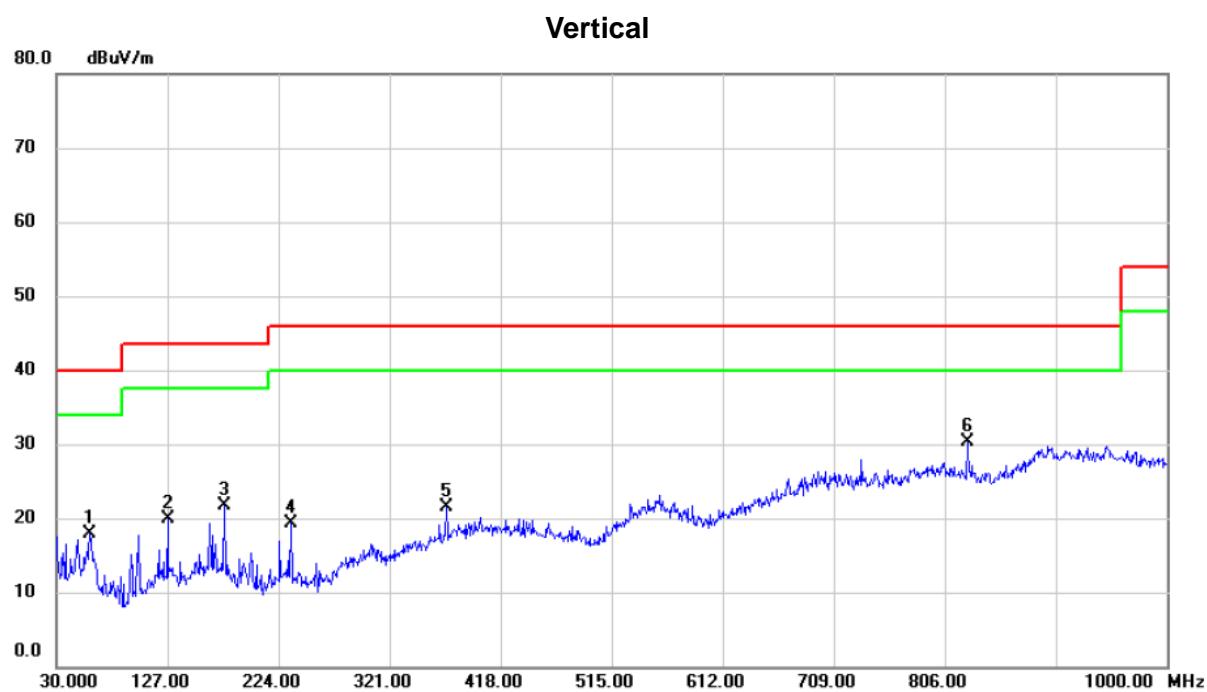


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		59.100	31.74	-13.78	17.96	40.00	-22.04	peak
2		127.000	32.61	-12.68	19.93	43.50	-23.57	peak
3		176.470	34.37	-12.62	21.75	43.50	-21.75	peak
4		234.670	32.82	-13.56	19.26	46.00	-26.74	peak
5		370.470	31.26	-9.82	21.44	46.00	-24.56	peak
6 *		825.400	30.86	-0.51	30.35	46.00	-15.65	peak

Test Mode: TX Mode_5792 MHz – Ant 1



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		101.780	29.33	-15.32	14.01	43.50	-29.49	peak
2		191.990	32.40	-14.03	18.37	43.50	-25.13	peak
3		284.140	33.33	-11.71	21.62	46.00	-24.38	peak
4		357.860	37.25	-10.68	26.57	46.00	-19.43	peak
5		366.590	37.55	-10.08	27.47	46.00	-18.53	peak
6 *		699.300	33.95	-2.13	31.82	46.00	-14.18	peak

Test Mode: TX Mode_5840 MHz – Ant 1

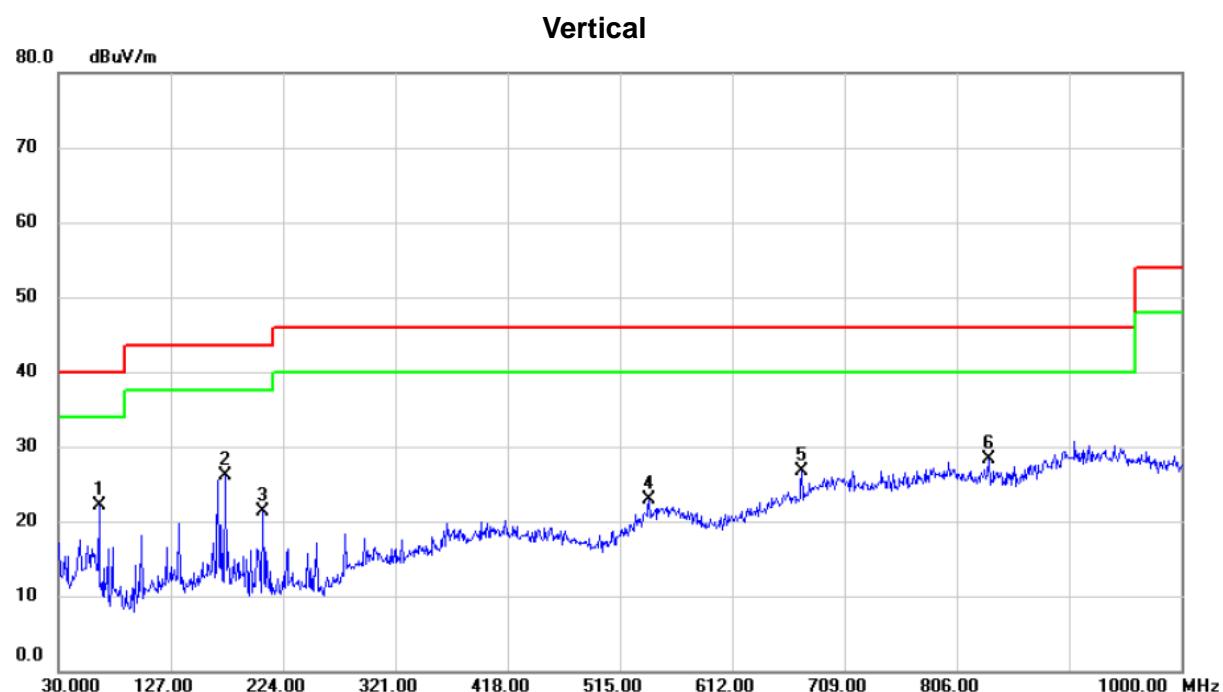

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		64.920	37.28	-15.16	22.12	40.00	-17.88	peak
2 *		173.560	38.62	-12.46	26.16	43.50	-17.34	peak
3		206.540	35.84	-14.58	21.26	43.50	-22.24	peak
4		540.220	28.37	-5.55	22.82	46.00	-23.18	peak
5		672.140	29.95	-3.26	26.69	46.00	-19.31	peak
6		834.130	29.13	-0.78	28.35	46.00	-17.65	peak


Test Mode: TX Mode_5840 MHz – Ant 1

Horizontal




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		101.780	29.27	-15.32	13.95	43.50	-29.55	peak	
2		256.010	41.52	-14.20	27.32	46.00	-18.68	peak	
3		338.460	36.87	-10.98	25.89	46.00	-20.11	peak	
4	*	366.590	39.65	-10.08	29.57	46.00	-16.43	peak	
5		548.950	27.65	-4.64	23.01	46.00	-22.99	peak	
6		785.630	28.01	-0.38	27.63	46.00	-18.37	peak	

Test Mode: TX Mode_5743 MHz – Ant 2

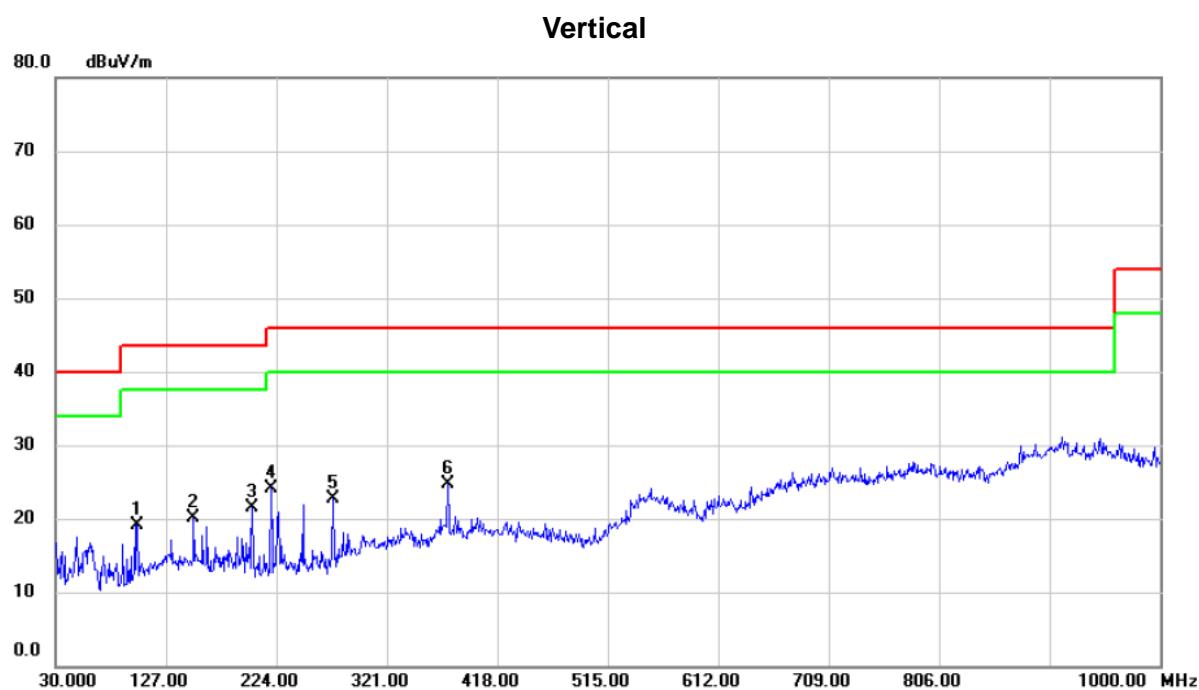


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Margin Detector	Comment
1		101.780	34.34	-15.32	19.02	43.50	-24.48	peak
2		151.250	32.85	-12.84	20.01	43.50	-23.49	peak
3		202.660	35.96	-14.48	21.48	43.50	-22.02	peak
4		219.150	38.49	-14.29	24.20	46.00	-21.80	peak
5		273.470	35.67	-12.94	22.73	46.00	-23.27	peak
6 *		374.350	34.18	-9.55	24.63	46.00	-21.37	peak

Test Mode: TX Mode_5743 MHz – Ant 2

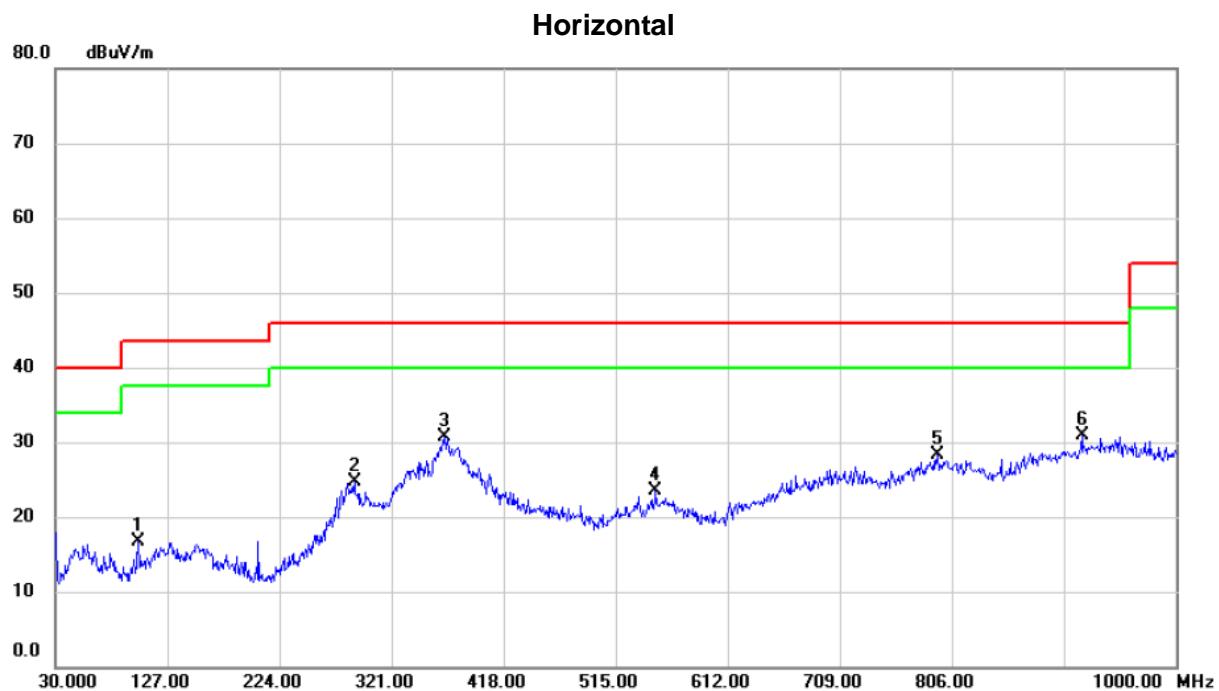

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		101.780	31.93	-15.32	16.61	43.50	-26.89	peak
2		288.990	36.06	-11.32	24.74	46.00	-21.26	peak
3		366.590	40.74	-10.08	30.66	46.00	-15.34	peak
4		549.920	27.97	-4.55	23.42	46.00	-22.58	peak
5		793.390	28.31	-0.03	28.28	46.00	-17.72	peak
6 *		918.520	28.35	2.56	30.91	46.00	-15.09	peak

Test Mode: TX Mode_5792 MHz – Ant 2

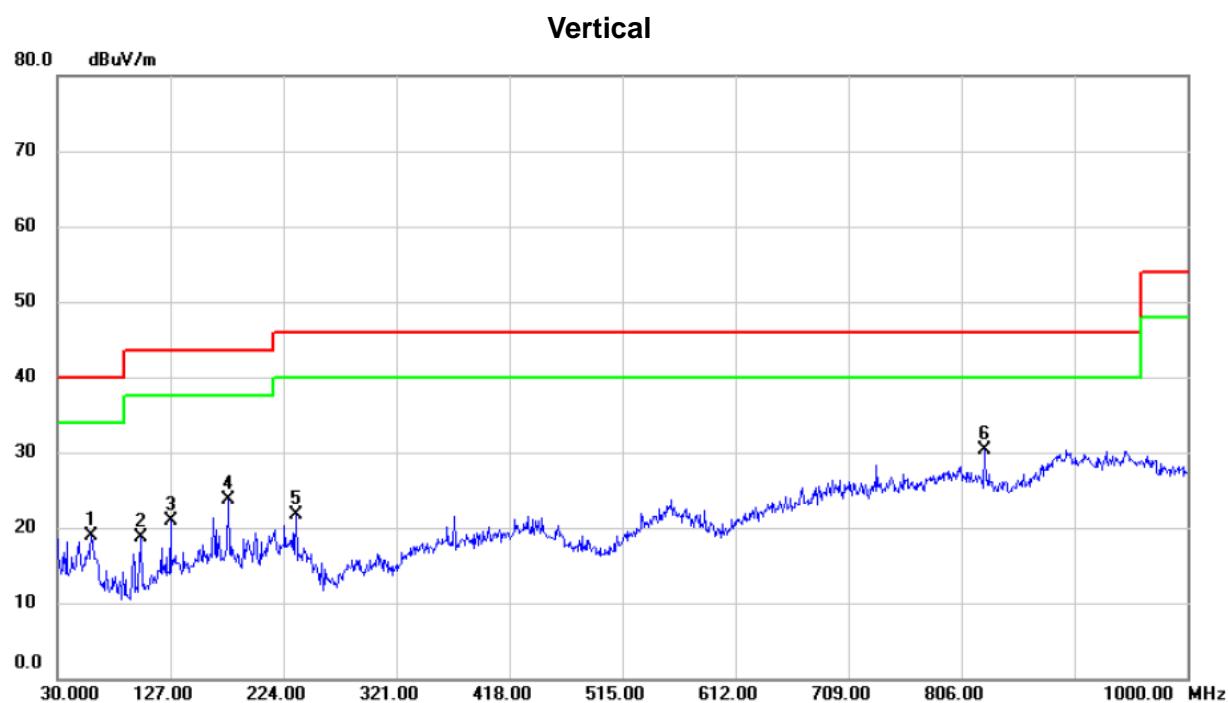

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		59.100	32.74	-13.78	18.96	40.00	-21.04	peak
2		101.780	33.96	-15.32	18.64	43.50	-24.86	peak
3		127.000	33.61	-12.68	20.93	43.50	-22.57	peak
4		176.470	36.37	-12.62	23.75	43.50	-19.75	peak
5		234.670	35.32	-13.56	21.76	46.00	-24.24	peak
6 *		825.400	30.86	-0.51	30.35	46.00	-15.65	peak


Test Mode: TX Mode_5792 MHz – Ant 2

Horizontal



No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	
1		101.780	31.33	-15.32	16.01	43.50	-27.49	peak
2		191.990	33.40	-14.03	19.37	43.50	-24.13	peak
3		284.140	34.33	-11.71	22.62	46.00	-23.38	peak
4		331.670	37.94	-10.83	27.11	46.00	-18.89	peak
5		366.590	39.55	-10.08	29.47	46.00	-16.53	peak
6 *		699.300	33.45	-2.13	31.32	46.00	-14.68	peak

Test Mode: TX Mode_5840 MHz – Ant 2

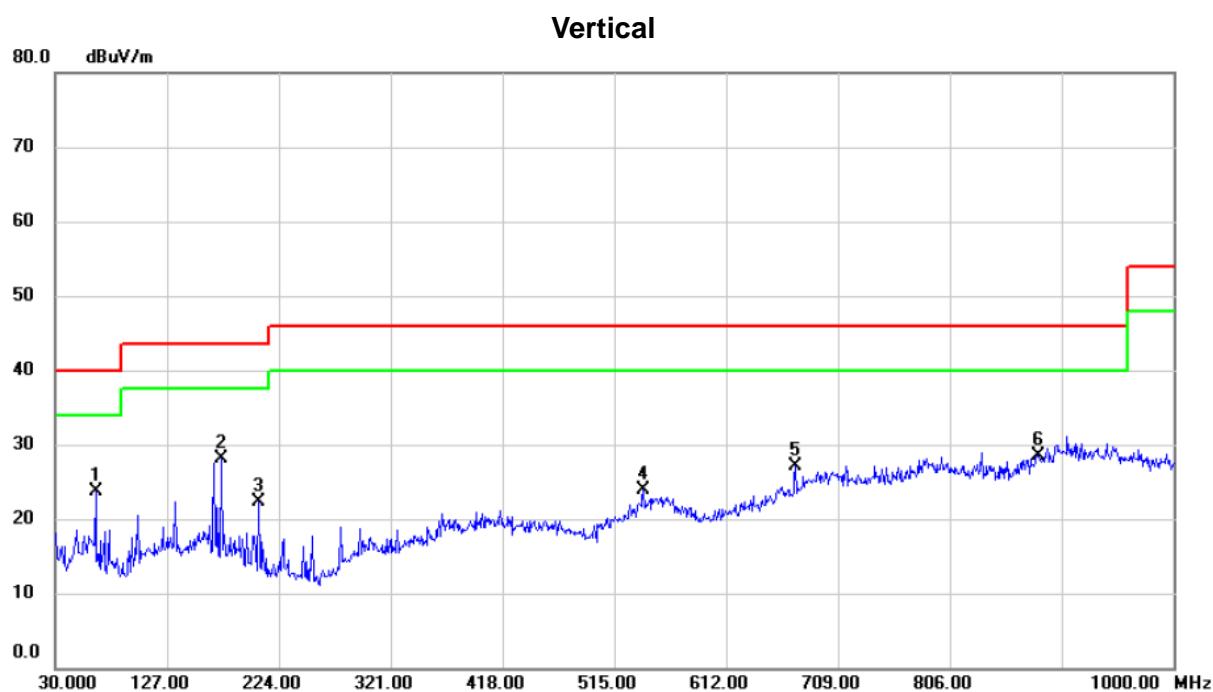

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		64.920	38.78	-15.16	23.62	40.00	-16.38	peak
2 *		173.560	40.62	-12.46	28.16	43.50	-15.34	peak
3		206.540	36.84	-14.58	22.26	43.50	-21.24	peak
4		540.220	29.37	-5.55	23.82	46.00	-22.18	peak
5		672.140	30.45	-3.26	27.19	46.00	-18.81	peak
6		882.630	27.27	1.29	28.56	46.00	-17.44	peak

Test Mode: TX Mode_5840 MHz – Ant 2


Horizontal

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit dBuV/m	Margin dB	Detector	Comment
			Level dBuV	Factor dB	ment dBuV/m				
1		101.780	31.27	-15.32	15.95	43.50	-27.55		peak
2		256.010	42.02	-14.20	27.82	46.00	-18.18		peak
3		338.460	37.87	-10.98	26.89	46.00	-19.11		peak
4		366.590	40.15	-10.08	30.07	46.00	-15.93		peak
5		548.950	28.15	-4.64	23.51	46.00	-22.49		peak
6 *		903.000	28.63	2.63	31.26	46.00	-14.74		peak

ATTACHMENT D -RADIATED EMISSION (ABOVE 1000MHZ)


Test Mode : TX Mode_5743 MHz – Ant 1

Vertical

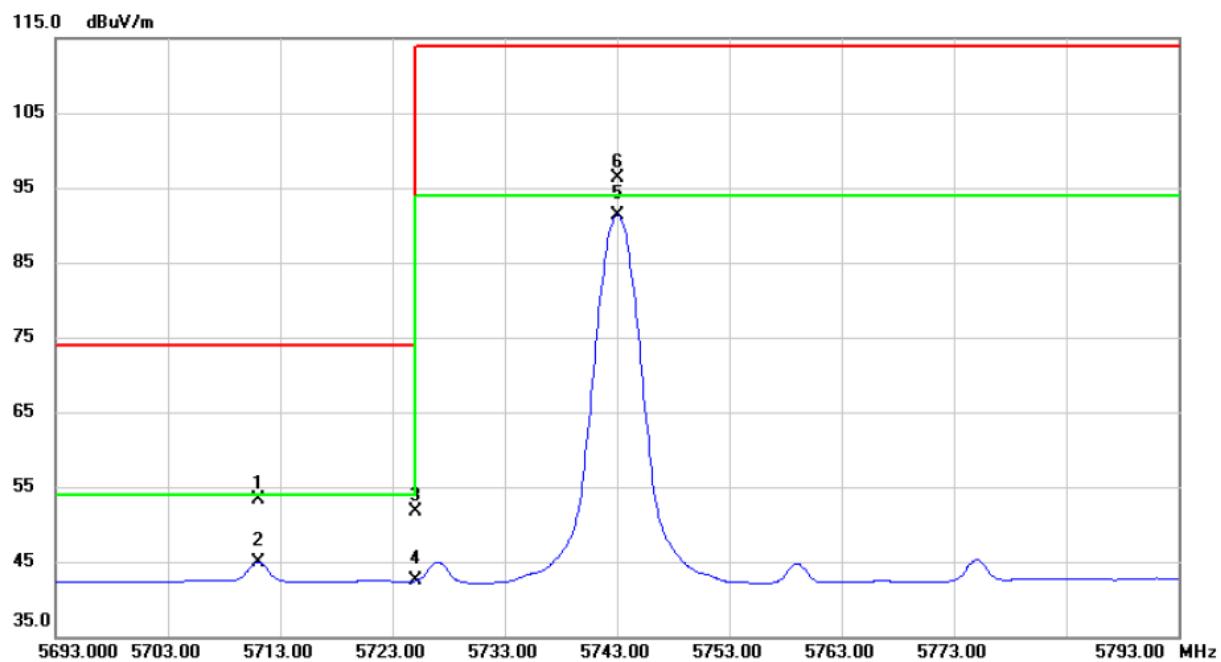


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5711.000	10.67	42.53	53.20	74.00	-20.80	peak	
2		5711.000	2.43	42.53	44.96	54.00	-9.04	AVG	
3		5725.000	9.14	42.58	51.72	74.00	-22.28	peak	
4		5725.000	-0.16	42.58	42.42	54.00	-11.58	AVG	
5	*	5743.000	48.71	42.64	91.35	94.00	-2.65	AVG	
6		5743.100	53.68	42.64	96.32	114.00	-17.68	peak	

Test Mode : TX Mode_5743 MHz – Ant 1

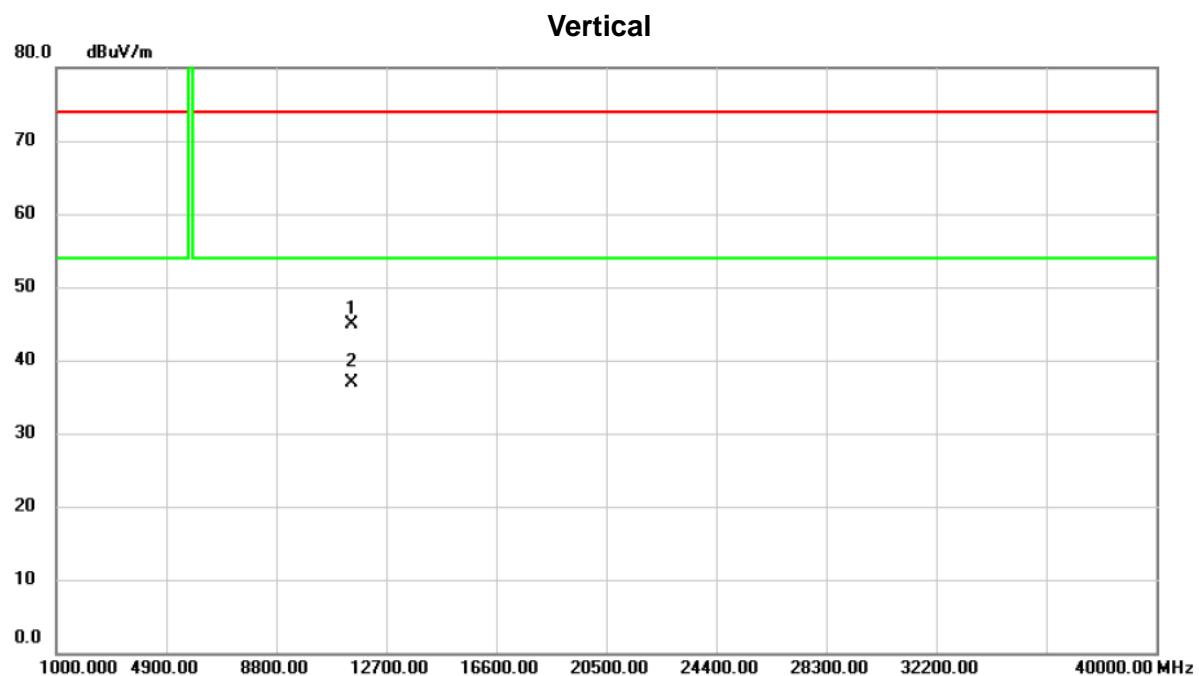


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		11485.890	29.42	15.48	44.90	74.00	-29.10	peak
2 *		11487.360	21.35	15.48	36.83	54.00	-17.17	AVG

Test Mode : TX Mode_5743 MHz – Ant 1

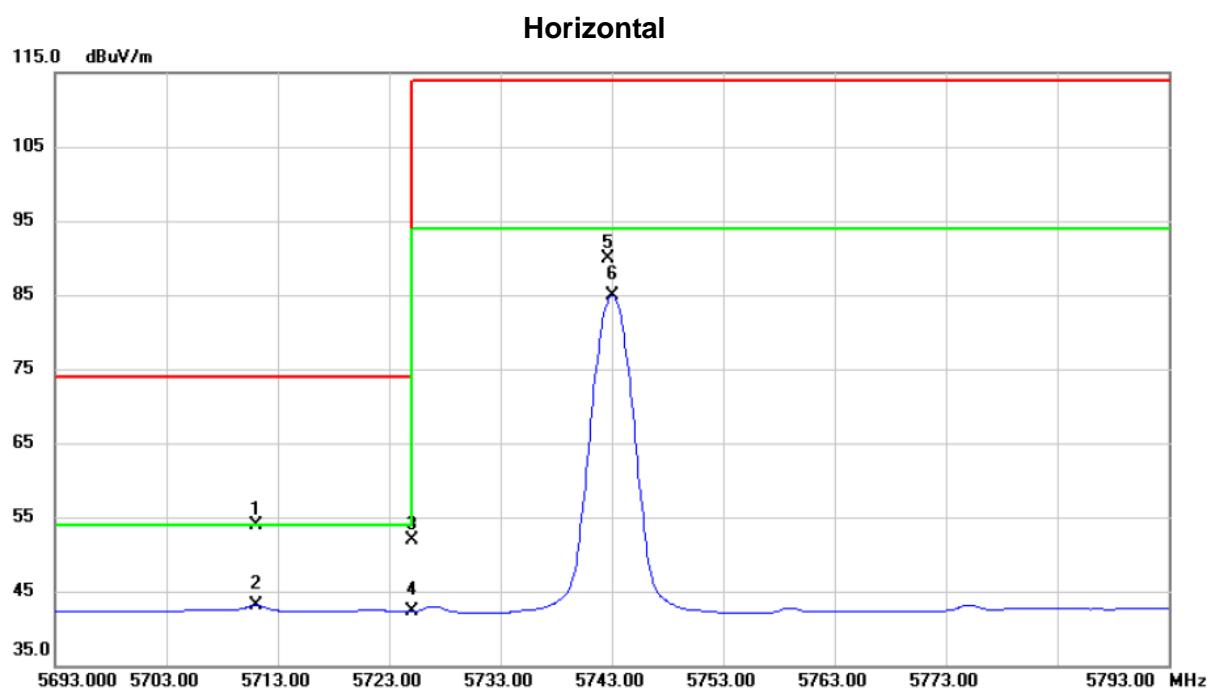


No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	5711.000	11.31	42.53	53.84	74.00	-20.16	peak		
2	5711.000	0.59	42.53	43.12	54.00	-10.88	AVG		
3	5725.000	9.37	42.58	51.95	74.00	-22.05	peak		
4	5725.000	-0.27	42.58	42.31	54.00	-11.69	AVG		
5	5742.700	47.17	42.64	89.81	114.00	-24.19	peak		
6 *	5743.000	42.32	42.64	84.96	94.00	-9.04	AVG		

Test Mode : TX Mode_5743 MHz – Ant 1

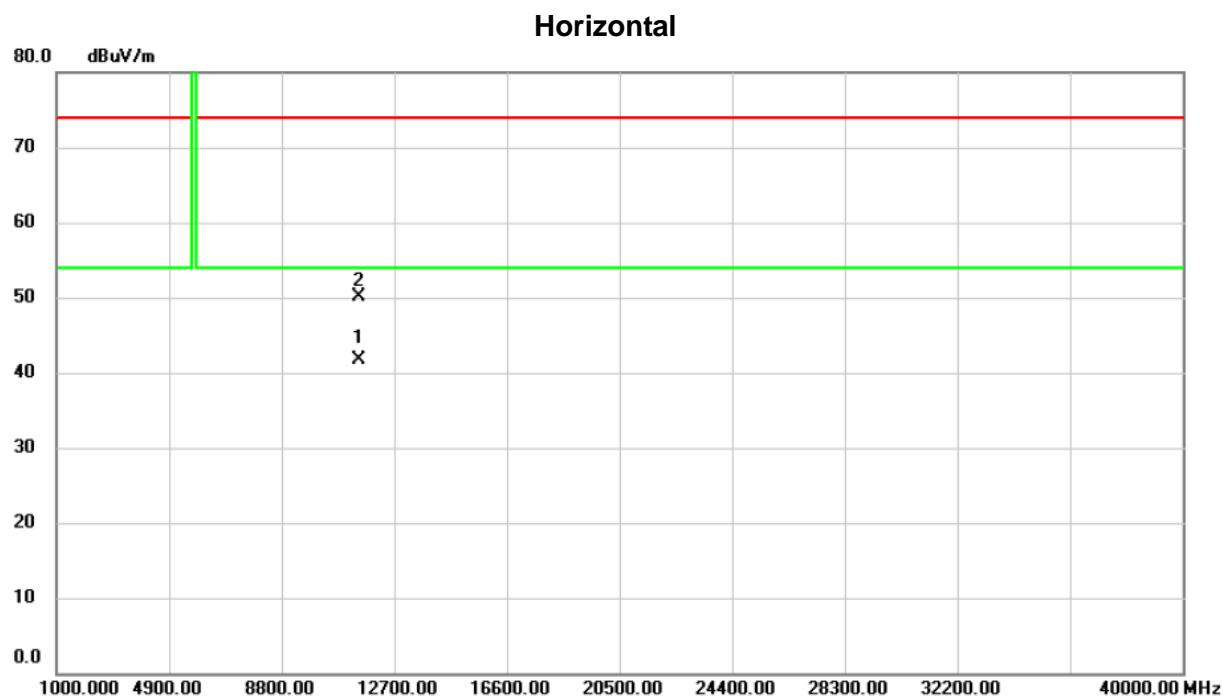


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	11484.745	26.19	15.50	41.69	54.00	-12.31	AVG
2		11486.150	34.55	15.48	50.03	74.00	-23.97	peak

Test Mode : TX Mode_5792 MHz – Ant 1

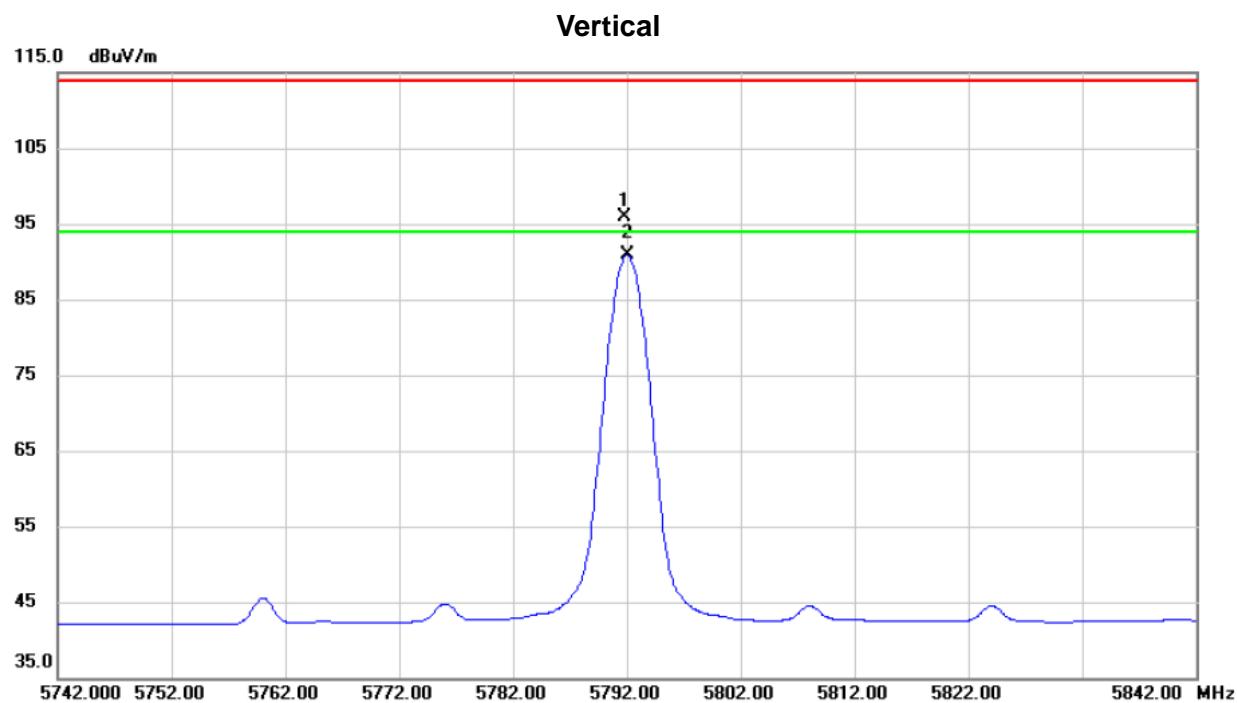


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		5791.800	53.02	42.82	95.84	114.00	-18.16	peak
2 *		5792.000	48.05	42.82	90.87	94.00	-3.13	AVG

Test Mode : TX Mode_5792 MHz – Ant 1

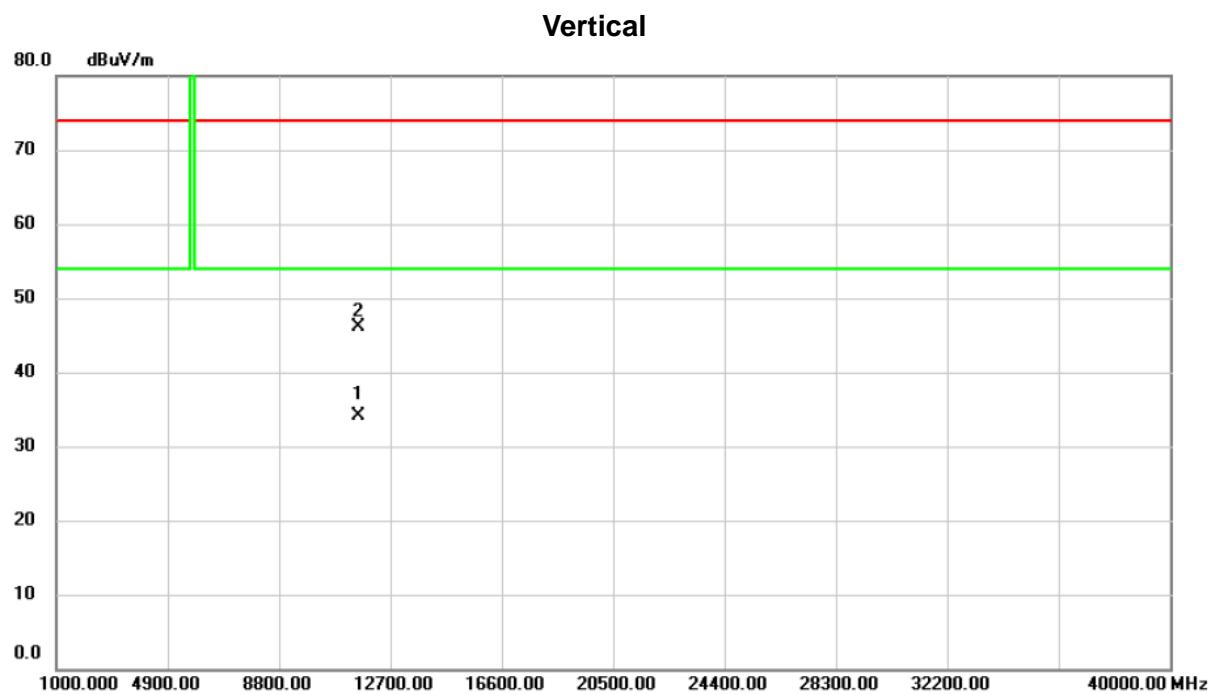


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	11582.210	18.57	15.47	34.04	54.00	-19.96	AVG
2		11583.090	30.63	15.47	46.10	74.00	-27.90	peak

Test Mode : TX Mode_5792 MHz – Ant 1

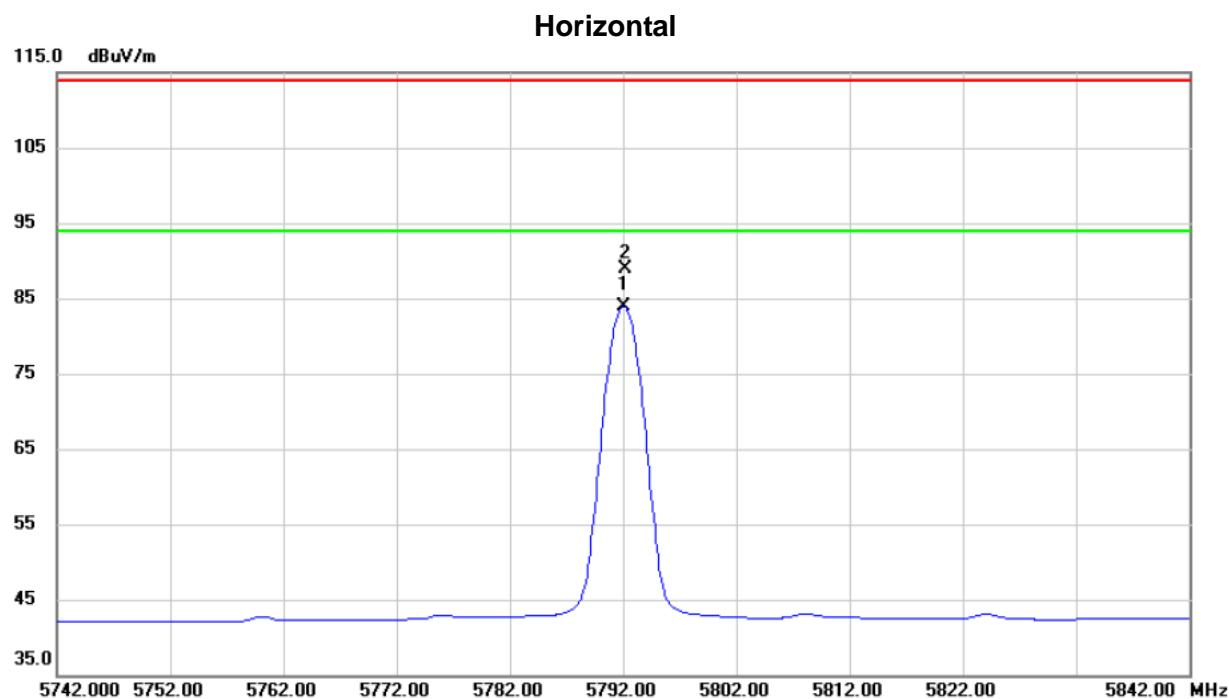


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	5792.000	41.15	42.82	83.97	94.00	-10.03	AVG
2		5792.200	46.13	42.82	88.95	114.00	-25.05	peak

Test Mode : TX Mode_5792 MHz – Ant 1

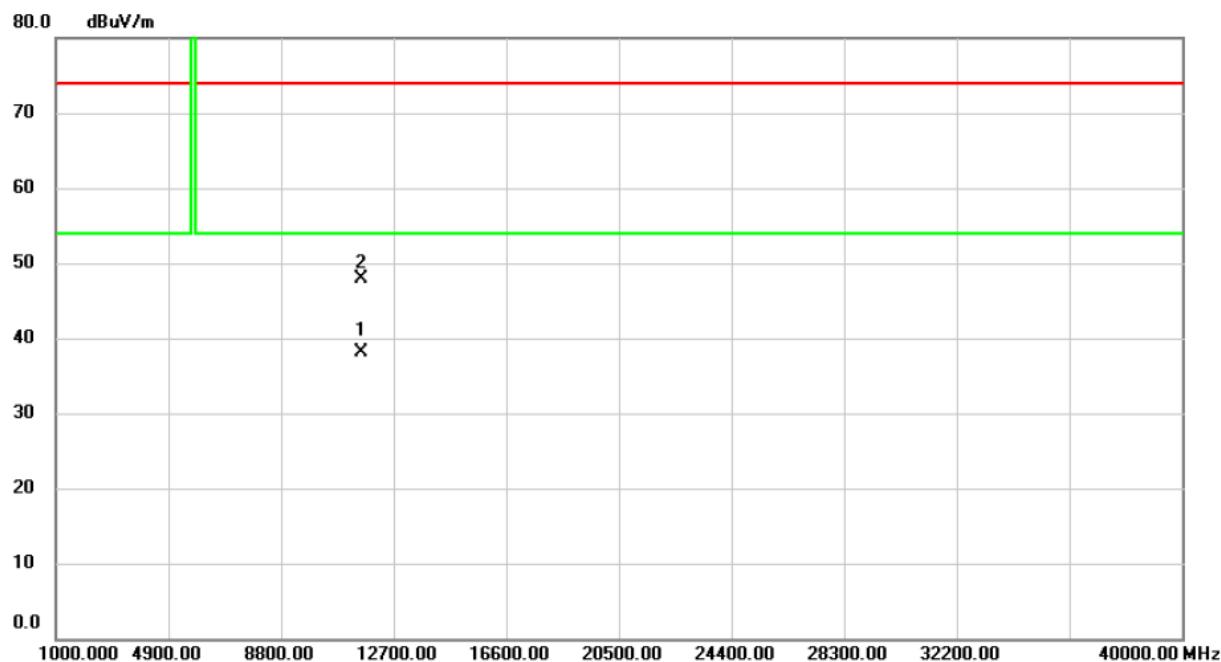Horizontal


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	11581.645	22.67	15.47	38.14	54.00	-15.86	AVG
2		11582.830	32.48	15.47	47.95	74.00	-26.05	peak

Test Mode : TX Mode_5840 MHz – Ant 1

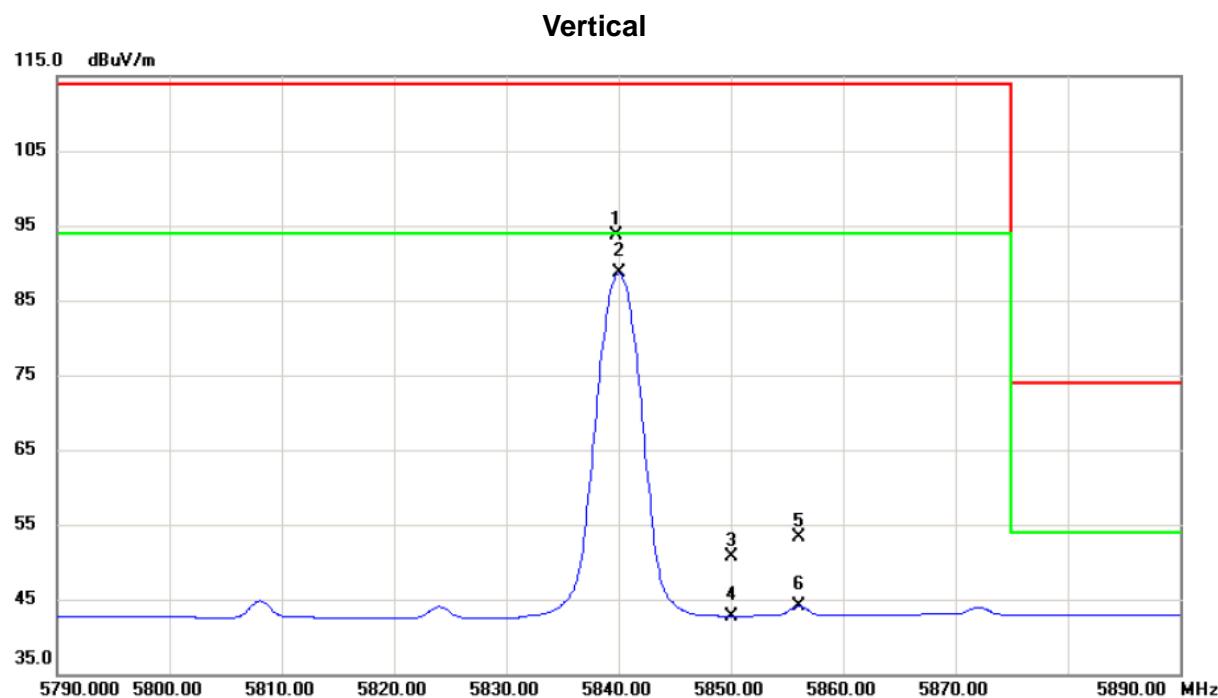


No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5839.800	50.63	42.99	93.62	114.00	-20.38	peak	
2 *		5840.000	45.65	42.99	88.64	94.00	-5.36	AVG	
3		5850.000	7.66	43.03	50.69	114.00	-63.31	peak	
4		5850.000	-0.27	43.03	42.76	94.00	-51.24	AVG	
5		5856.000	10.27	43.04	53.31	114.00	-60.69	peak	
6		5856.000	0.99	43.04	44.03	94.00	-49.97	AVG	

Test Mode : TX Mode_5840 MHz – Ant 1

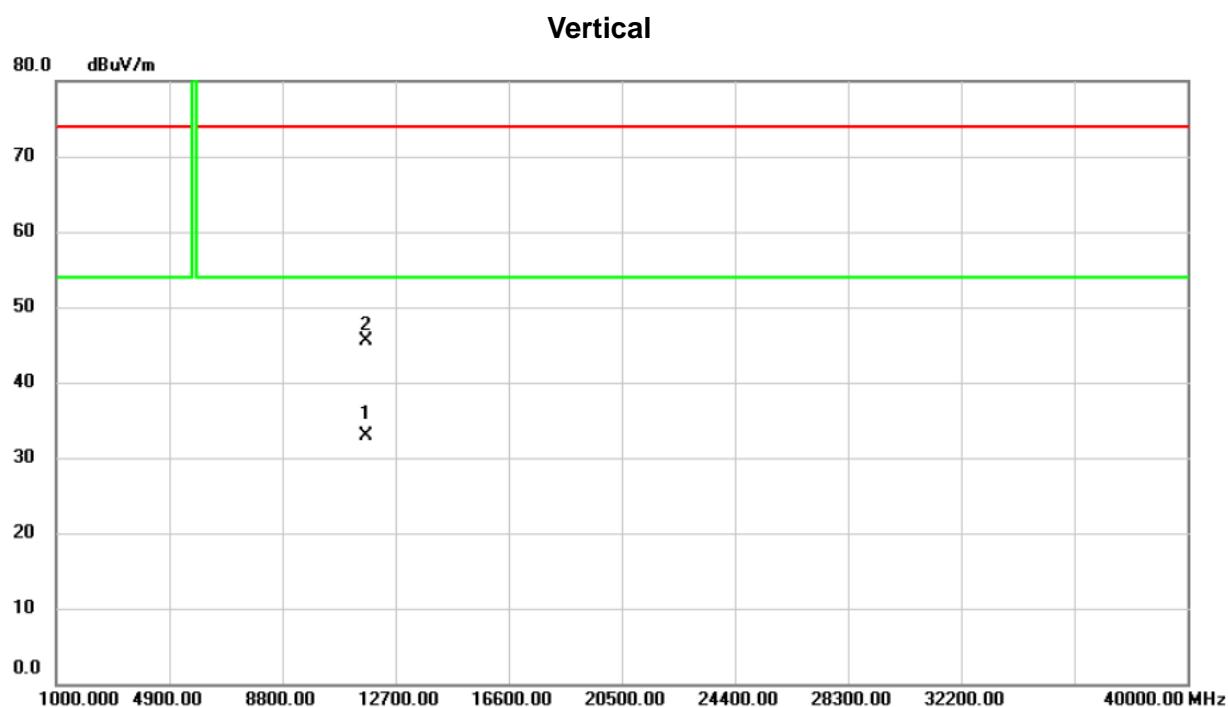


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	11679.760	17.37	15.48	32.85	54.00	-21.15	AVG
2		11680.865	30.11	15.48	45.59	74.00	-28.41	peak

Test Mode : TX Mode_5840 MHz – Ant 1

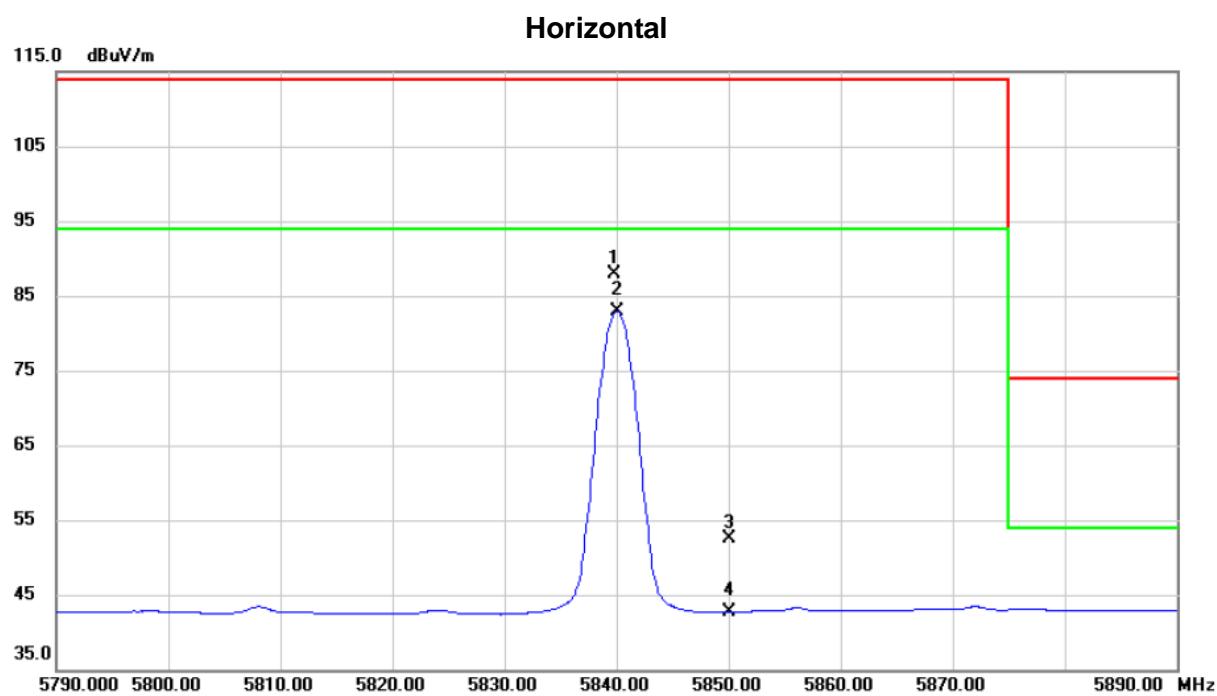


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5839.800	44.86	42.99	87.85	114.00	-26.15	peak	
2 *		5840.000	39.94	42.99	82.93	94.00	-11.07	AVG	
3		5850.000	9.53	43.03	52.56	114.00	-61.44	peak	
4		5850.000	-0.30	43.03	42.73	94.00	-51.27	AVG	

Test Mode : TX Mode_5840 MHz – Ant 1

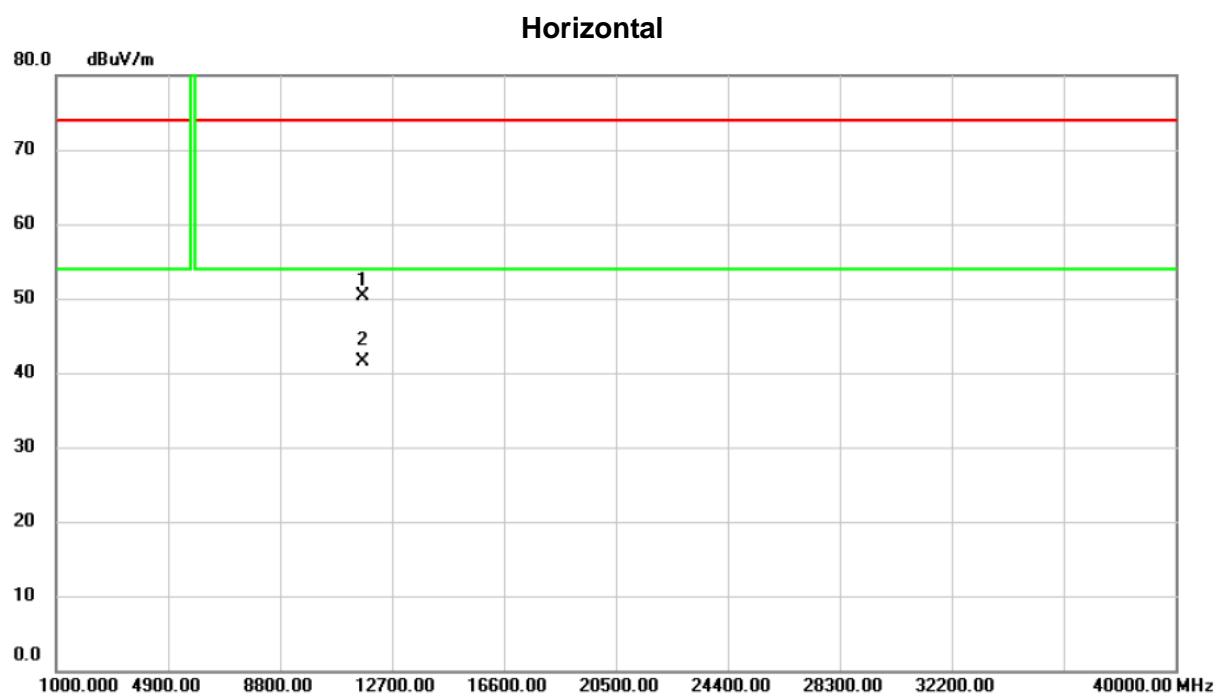


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11679.280	34.77	15.48	50.25	74.00	-23.75	peak	
2 *		11679.580	25.94	15.48	41.42	54.00	-12.58	AVG	

Test Mode : TX Mode_5743 MHz – Ant 2

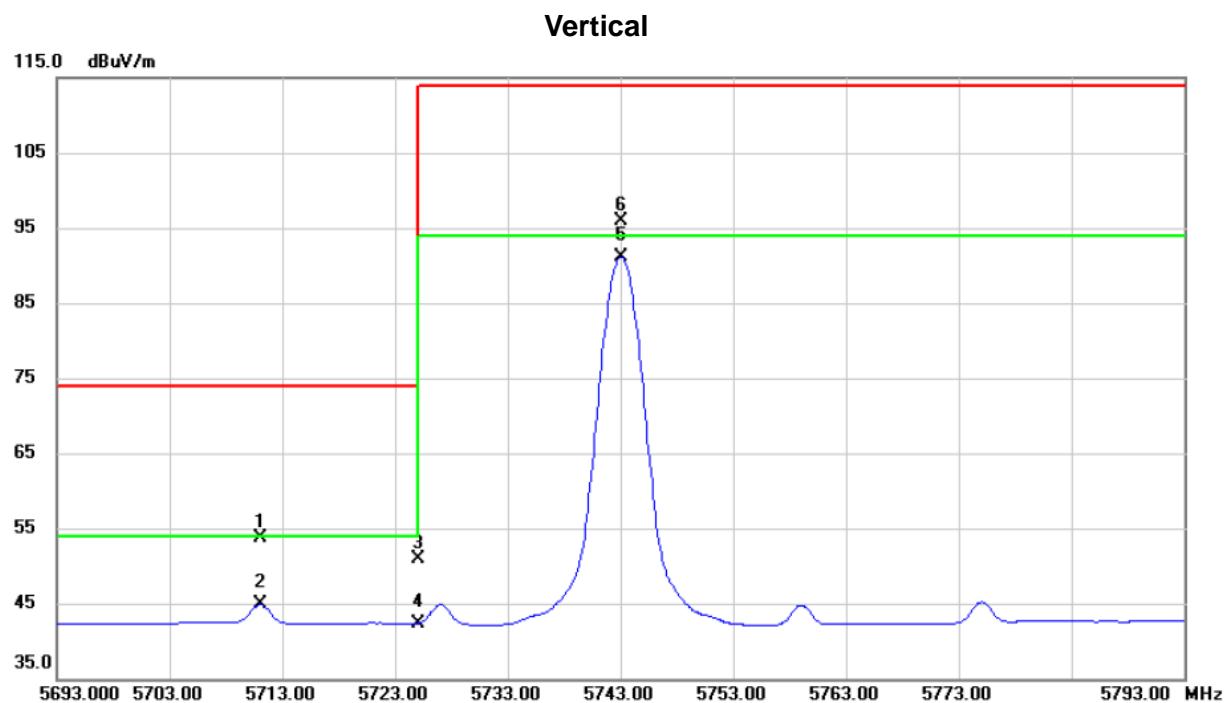


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5711.000	11.25	42.53	53.78	74.00	-20.22	peak		
2	5711.000	2.31	42.53	44.84	54.00	-9.16	AVG		
3	5725.000	8.23	42.58	50.81	74.00	-23.19	peak		
4	5725.000	-0.20	42.58	42.38	54.00	-11.62	AVG		
5 *	5743.000	48.47	42.64	91.11	94.00	-2.89	AVG		
6	5743.100	53.27	42.64	95.91	114.00	-18.09	peak		

Test Mode : TX Mode_5743 MHz – Ant 2

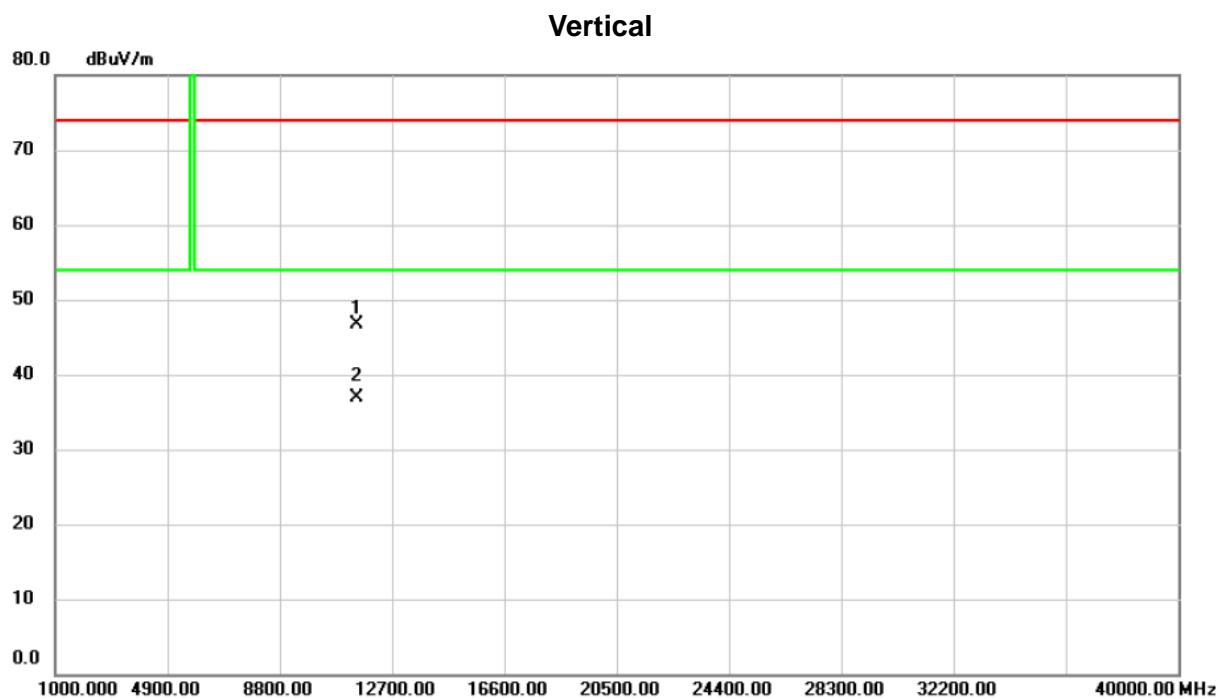

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		11483.720	31.17	15.50	46.67	74.00	-27.33	peak
2 *		11485.250	21.41	15.49	36.90	54.00	-17.10	AVG


Test Mode : TX Mode_5743 MHz – Ant 2

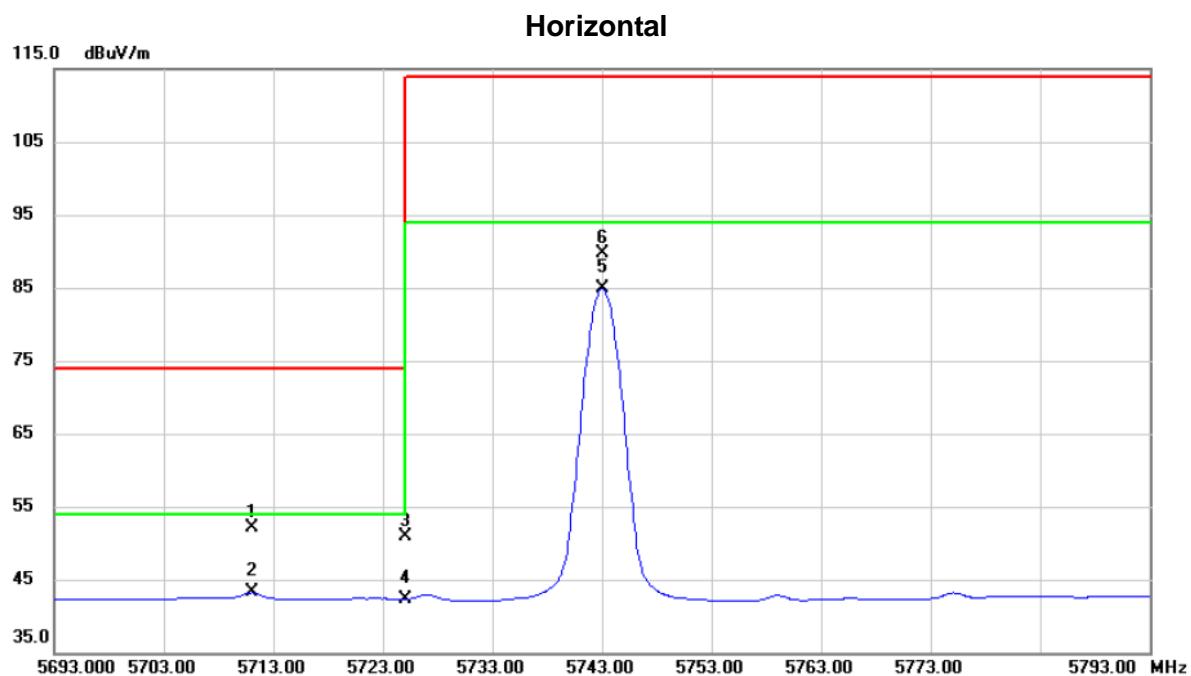

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dB _{uV}	dB	dB _{uV/m}	dB _{uV/m}	Detector	
1	5711.000	9.54	42.53	52.07	74.00	-21.93	peak	
2	5711.000	0.67	42.53	43.20	54.00	-10.80	AVG	
3	5725.000	8.30	42.58	50.88	74.00	-23.12	peak	
4	5725.000	-0.25	42.58	42.33	54.00	-11.67	AVG	
5 *	5743.000	42.23	42.64	84.87	94.00	-9.13	AVG	
6	5743.100	47.09	42.64	89.73	114.00	-24.27	peak	


Test Mode : TX Mode_5743 MHz – Ant 2

Horizontal

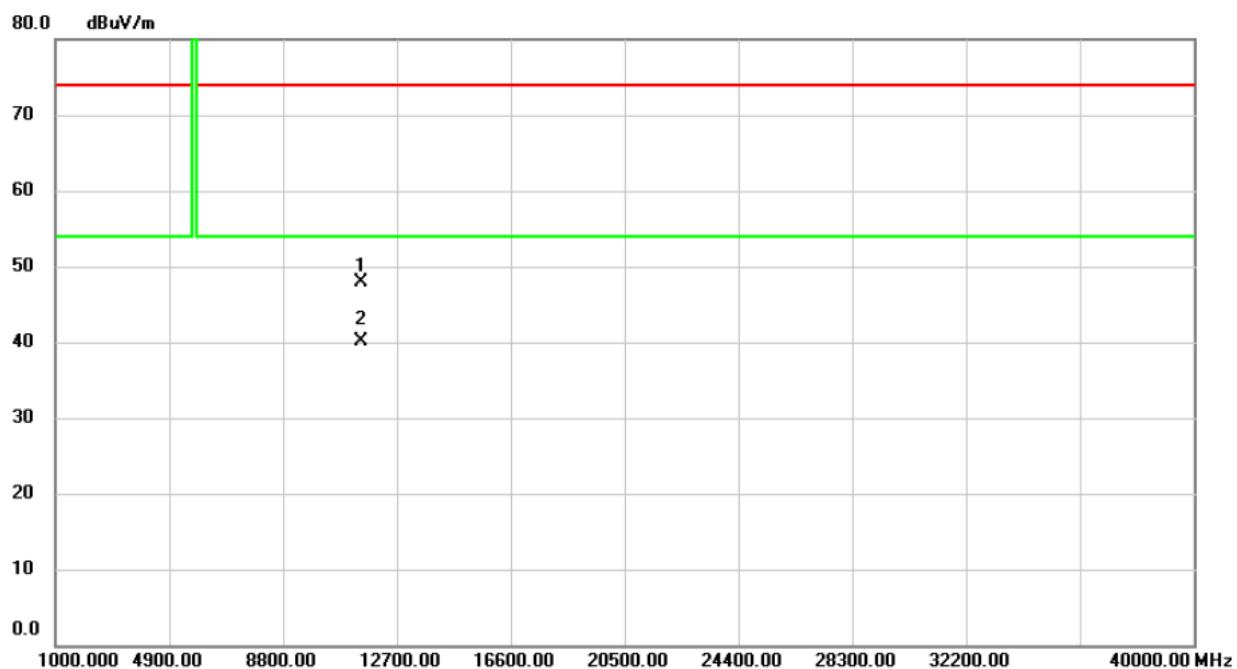


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		11484.555	32.49	15.50	47.99	74.00	-26.01	peak
2 *		11485.070	24.57	15.49	40.06	54.00	-13.94	AVG

Test Mode : TX Mode_5792 MHz – Ant 2

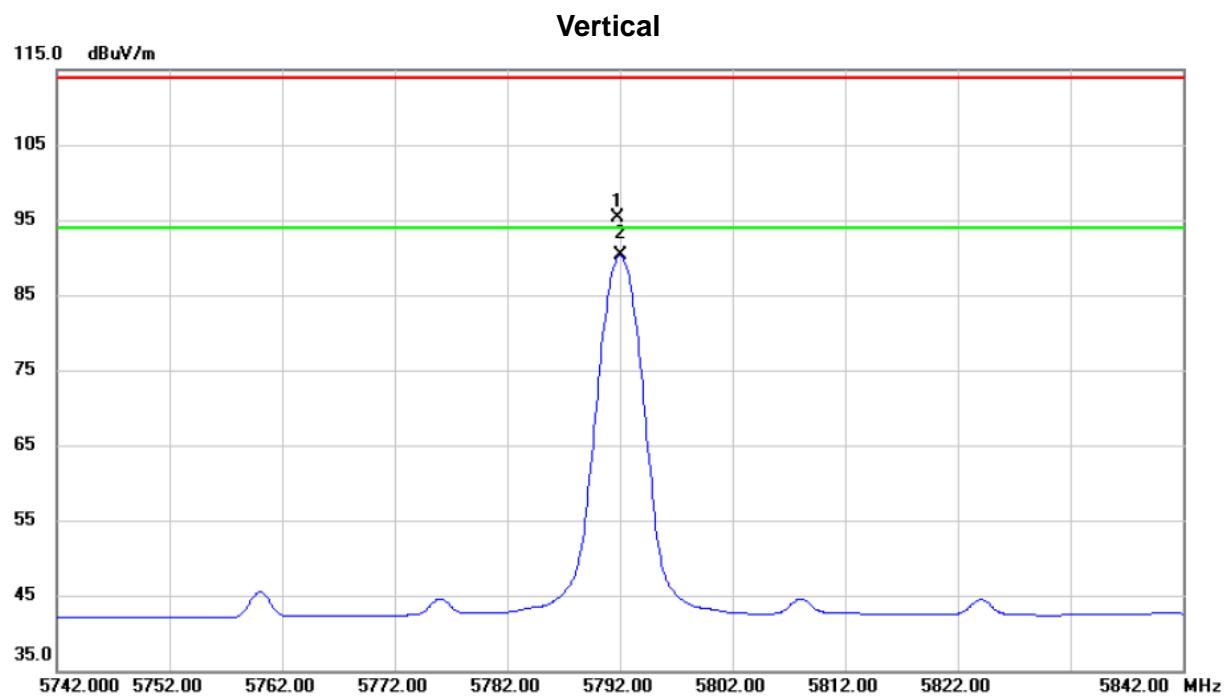


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		5791.800	52.49	42.82	95.31	114.00	-18.69	peak
2 *		5792.000	47.46	42.82	90.28	94.00	-3.72	AVG

Test Mode : TX Mode_5792 MHz – Ant 2

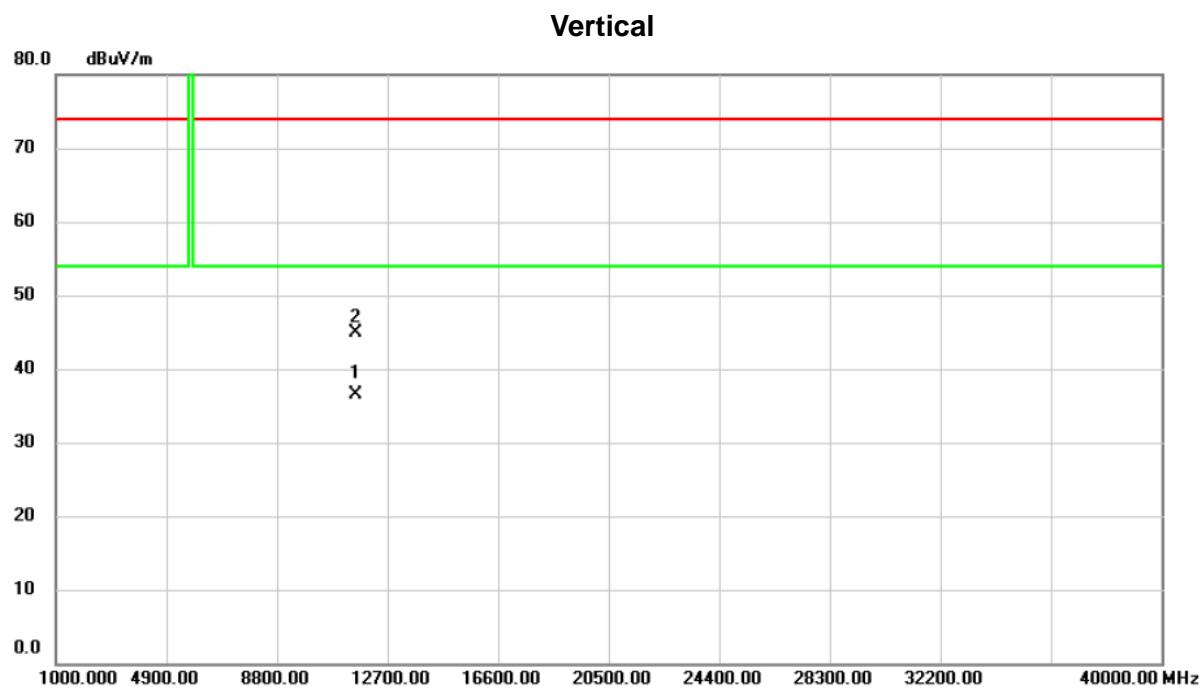


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	11581.510	21.00	15.47	36.47	54.00	-17.53	AVG
2		11585.735	29.51	15.48	44.99	74.00	-29.01	peak

Test Mode : TX Mode_5792 MHz – Ant 2

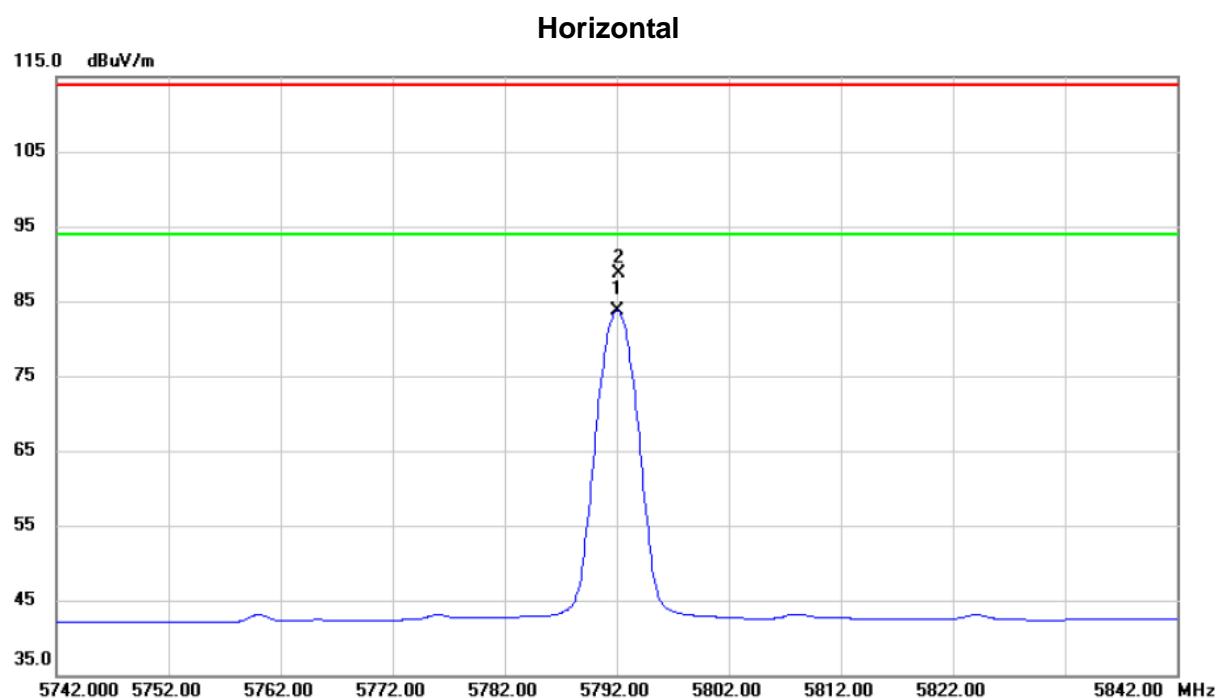


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	5792.000	40.88	42.82	83.70	94.00	-10.30	AVG
2		5792.200	45.90	42.82	88.72	114.00	-25.28	peak

Test Mode : TX Mode_5792 MHz – Ant 2

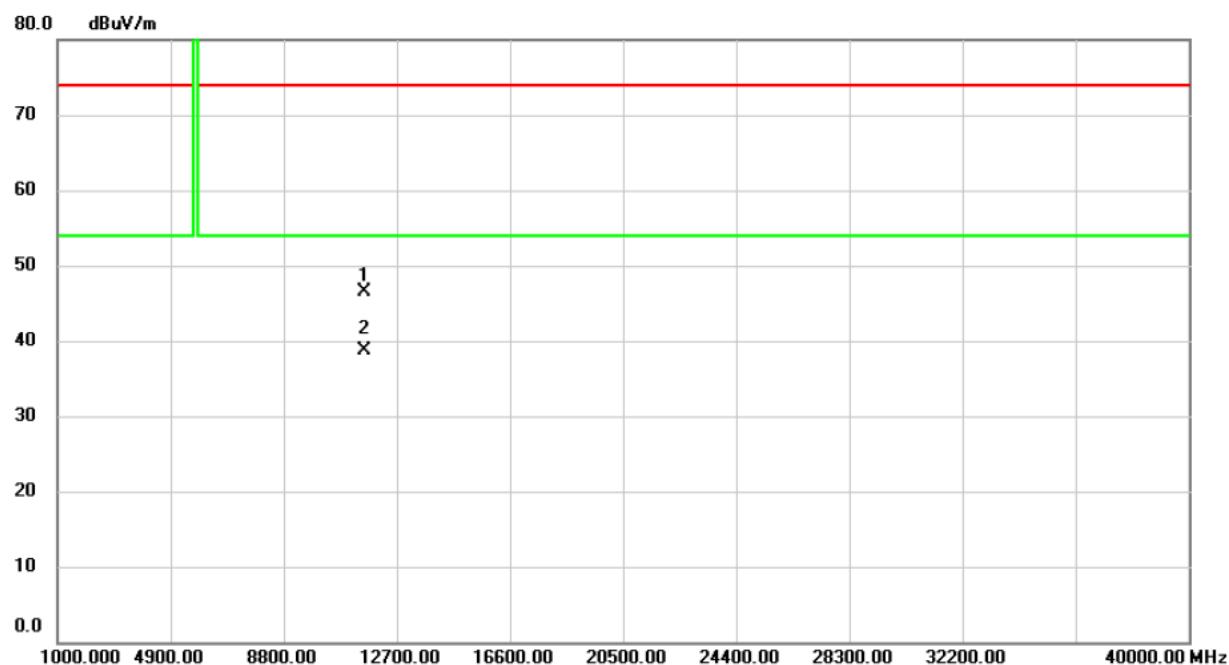Horizontal


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin
		MHz	dBuV	dB	dBuV/m	dB	Detector Comment
1		11584.155	31.00	15.48	46.48	74.00	-27.52 peak
2 *		11586.040	23.17	15.48	38.65	54.00	-15.35 AVG

Test Mode : TX Mode_5840 MHz – Ant 2

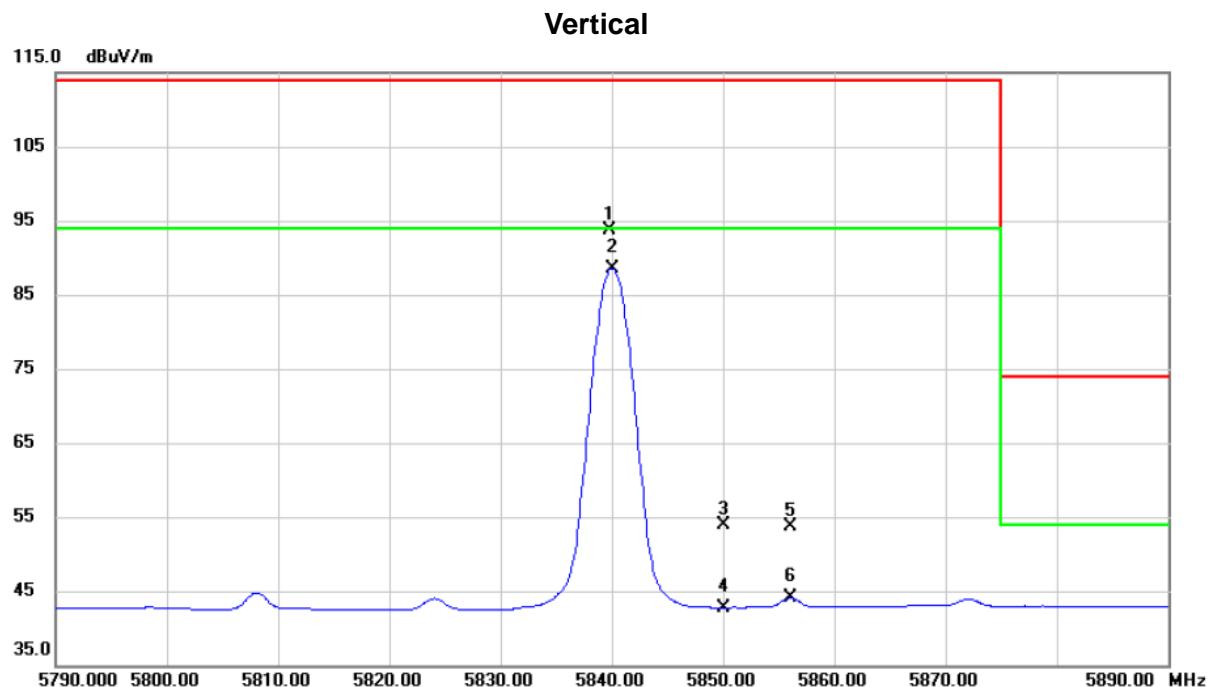


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5839.800	50.66	42.99	93.65	114.00	-20.35	peak	
2 *		5840.000	45.60	42.99	88.59	94.00	-5.41	AVG	
3		5850.000	10.85	43.03	53.88	114.00	-60.12	peak	
4		5850.000	-0.26	43.03	42.77	94.00	-51.23	AVG	
5		5856.000	10.65	43.04	53.69	114.00	-60.31	peak	
6		5856.000	0.99	43.04	44.03	94.00	-49.97	AVG	

Test Mode : TX Mode_5840 MHz – Ant 2

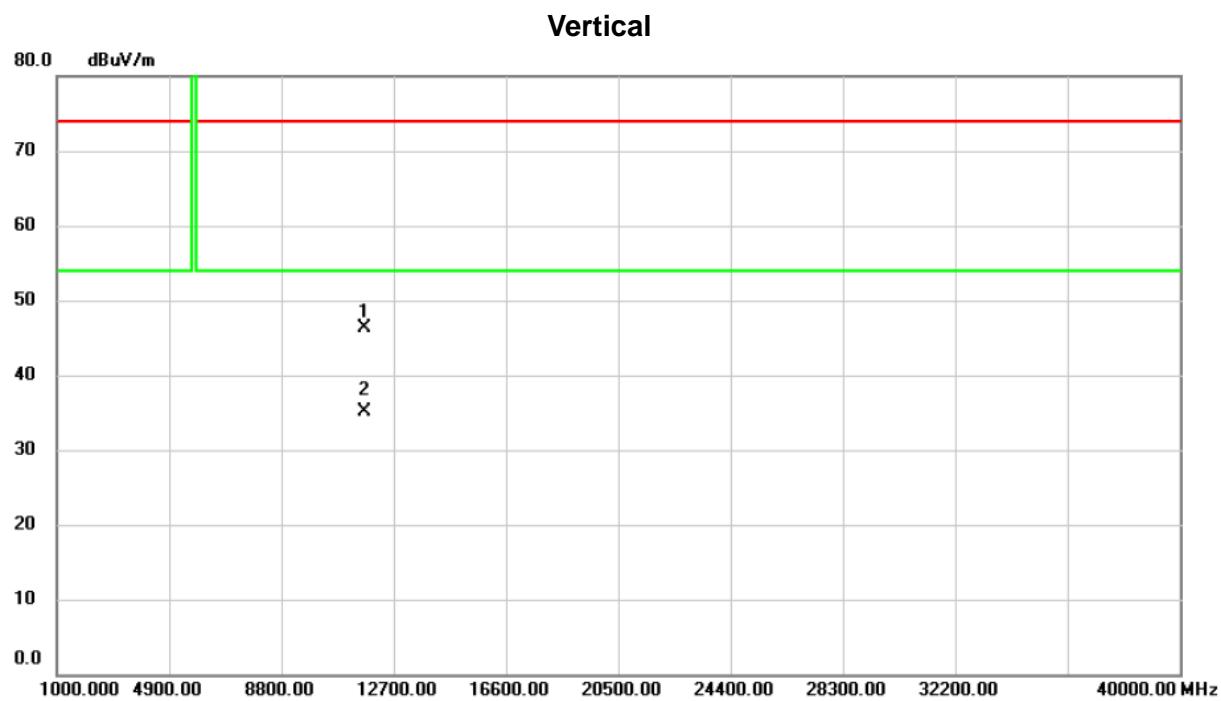


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		11678.300	30.90	15.48	46.38	74.00	-27.62	peak
2 *		11679.300	19.67	15.48	35.15	54.00	-18.85	AVG

Test Mode : TX Mode_5840 MHz – Ant 2

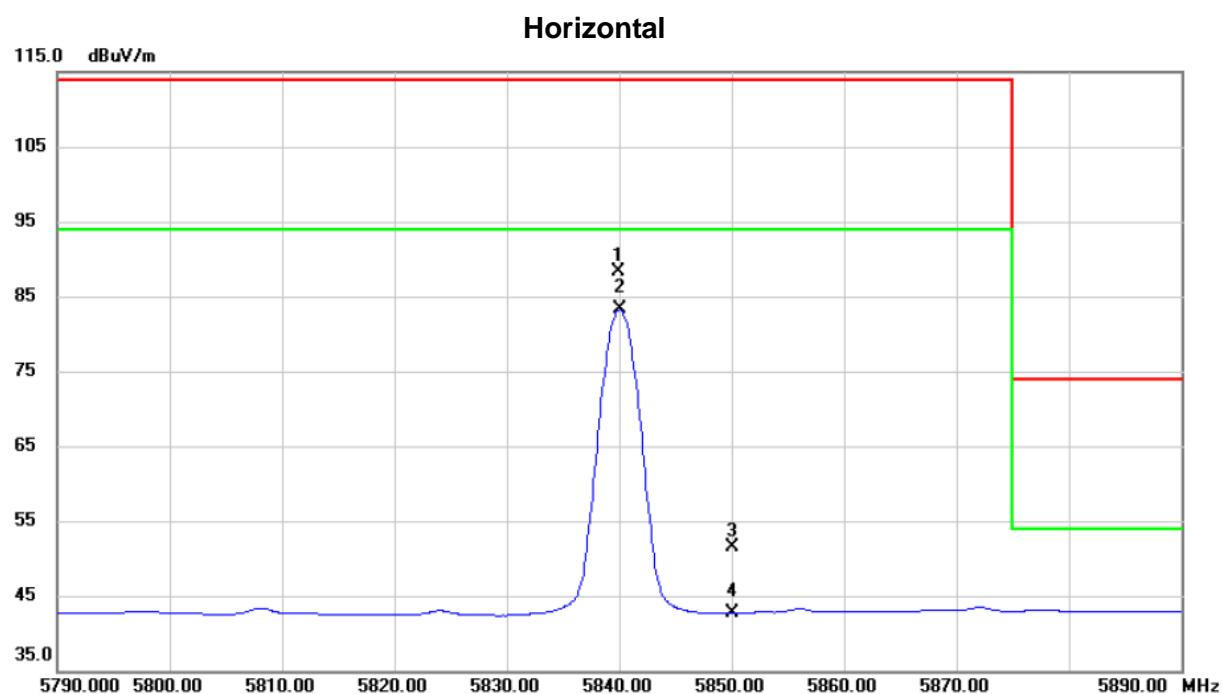

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5839.900	45.22	42.99	88.21	114.00	-25.79	peak	
2 *		5840.000	40.25	42.99	83.24	94.00	-10.76	AVG	
3		5850.000	8.51	43.03	51.54	114.00	-62.46	peak	
4		5850.000	-0.28	43.03	42.75	94.00	-51.25	AVG	

Test Mode : TX Mode_5840 MHz – Ant 2

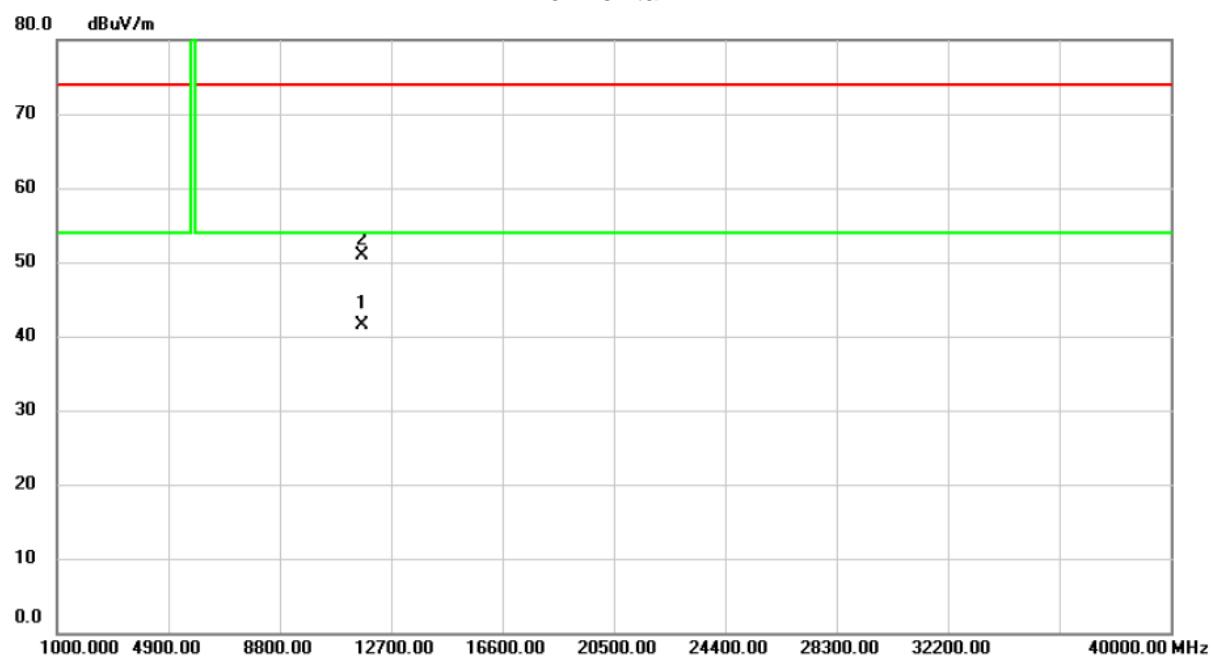Horizontal


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	11679.540	26.02	15.48	41.50	54.00	-12.50	AVG
2		11680.360	35.36	15.48	50.84	74.00	-23.16	peak

ATTACHMENT E - BANDWIDTH


Test Mode:	TX Mode – Ant 1
------------	-----------------

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)
5743	3.44	3.12
5792	3.60	3.28
5840	3.36	3.28

TX Mode_5743 MHz

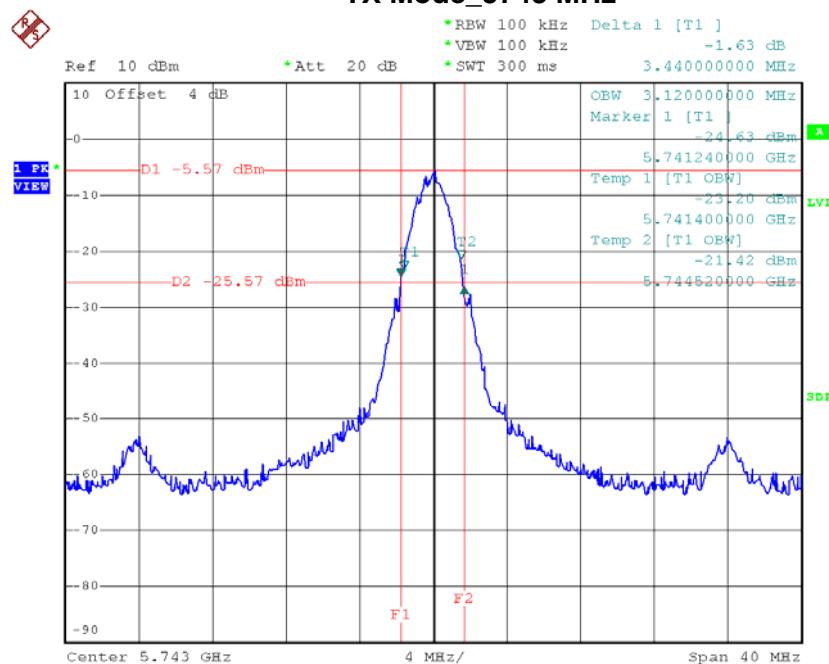


TX Mode_5792 MHz

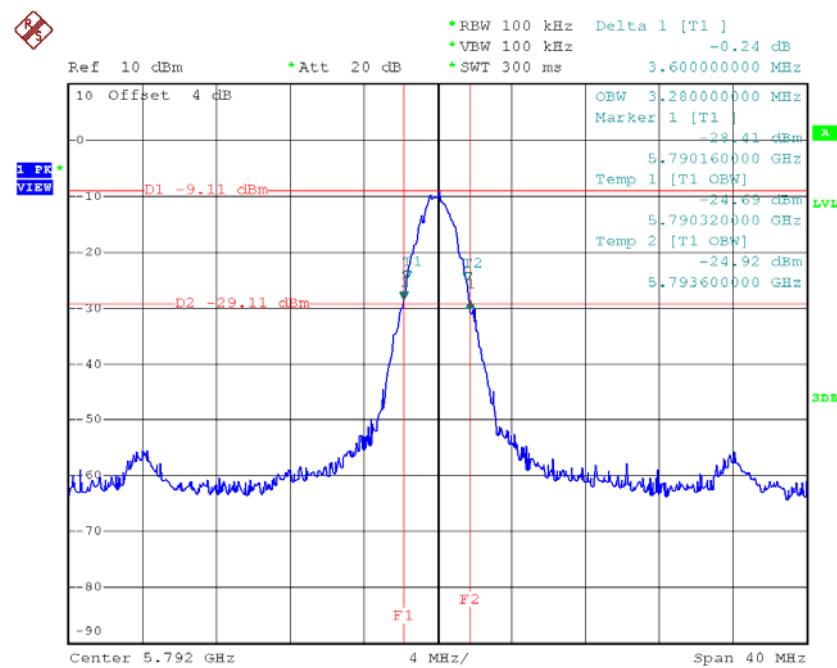

Date: 7.FEB.2017 15:49:41

TX Mode_5840 MHz

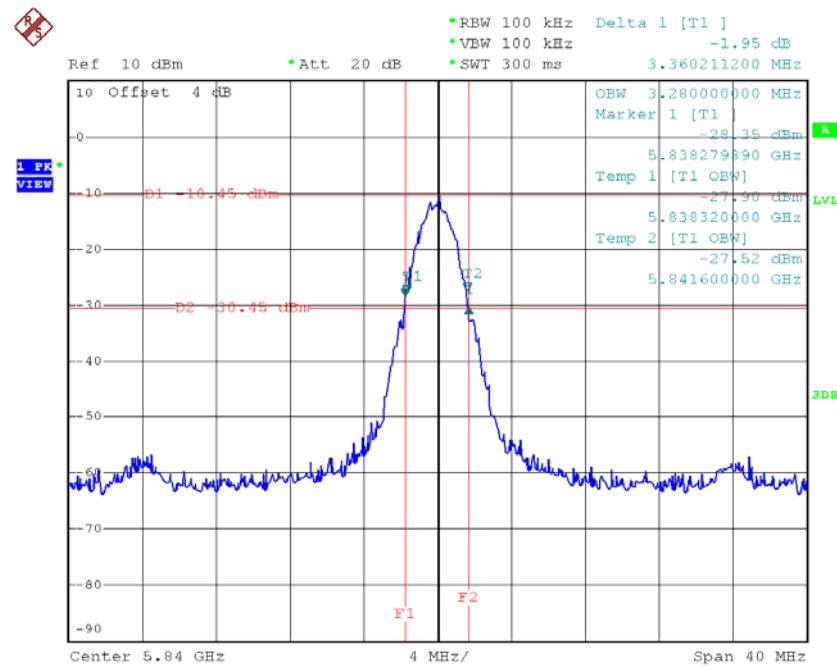


Date: 7.FEB.2017 16:18:42

Test Mode:	TX Mode – Ant 2
------------	-----------------


Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)
5743	3.44	3.28
5792	3.60	3.36
5840	3.52	3.28

TX Mode_5743 MHz

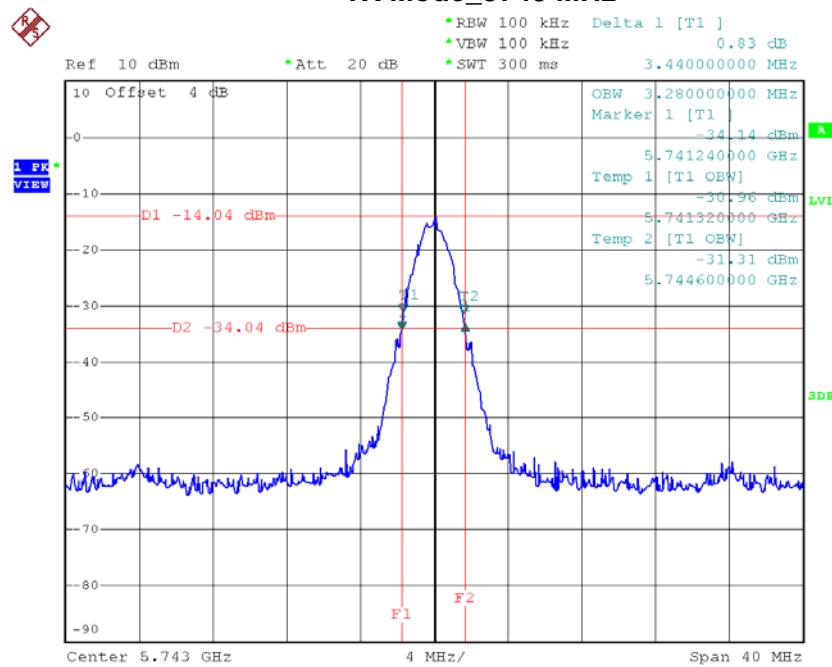


Date: 7.FEB.2017 15:29:31

TX Mode_5792 MHz

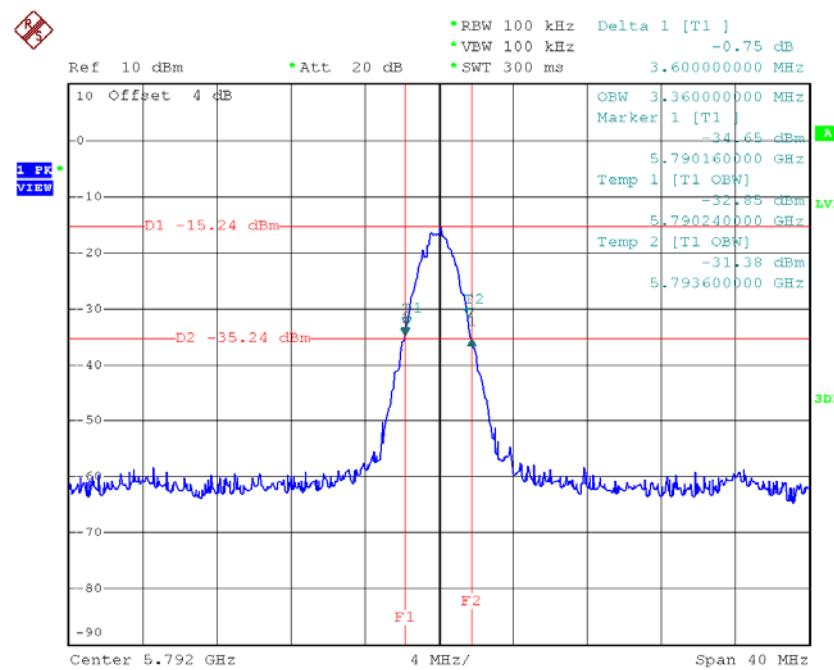

Date: 7.FEB.2017 15:35:55

TX Mode_5840 MHz

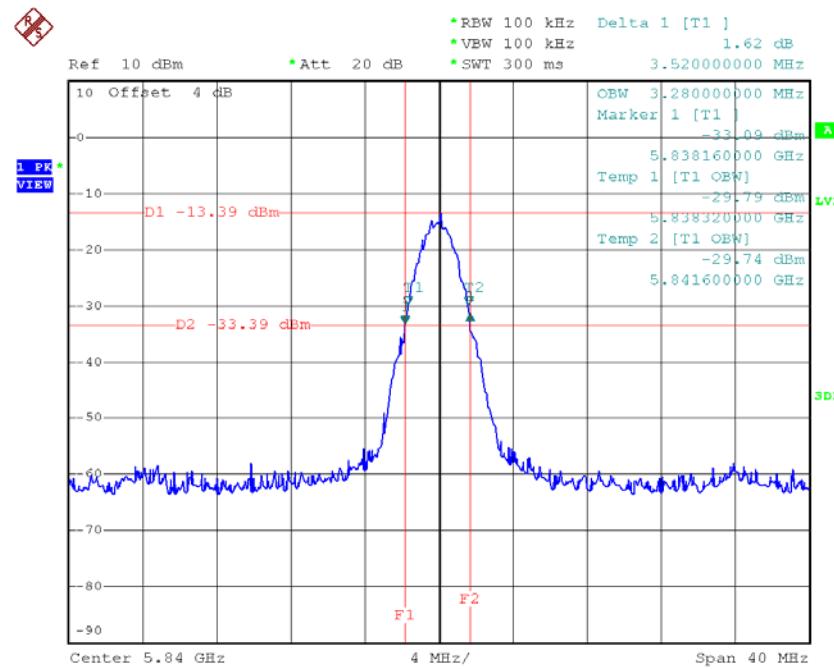

Date: 7.FEB.2017 15:44:19