


Test Mode	TX B Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

86.9 dBuV/m

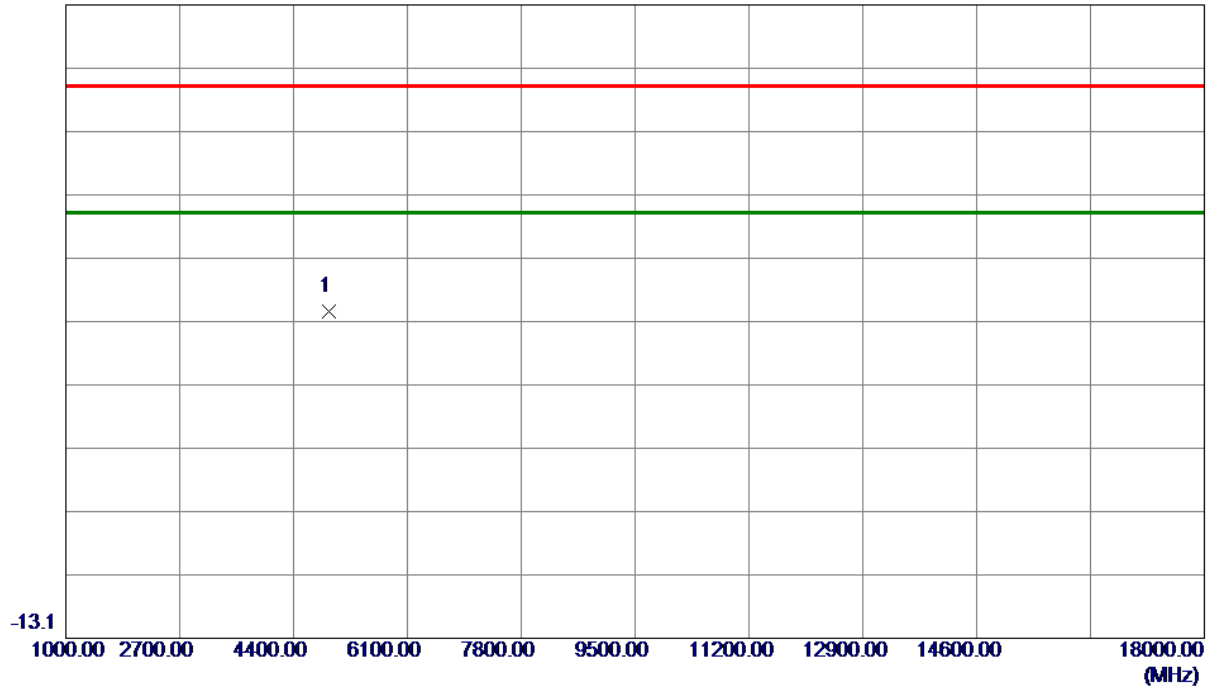


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.0000	52.23	-13.73	38.50	74.00	-35.50	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

120 dBuV/m

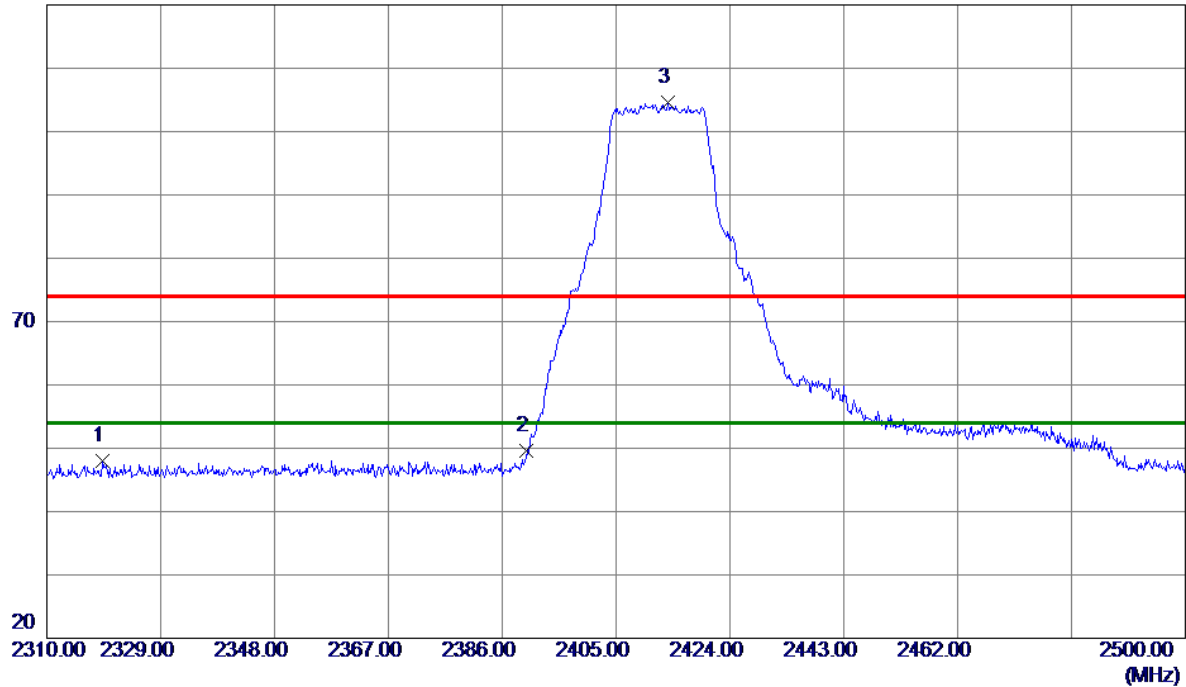


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2319.3670	16.17	31.91	48.08	74.00	-25.92	Peak	
2	2390.0000	17.36	32.20	49.56	74.00	-24.44	Peak	
3 *	2413.7020	72.31	32.30	104.61	74.00	30.61	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

86.9 dBuV/m

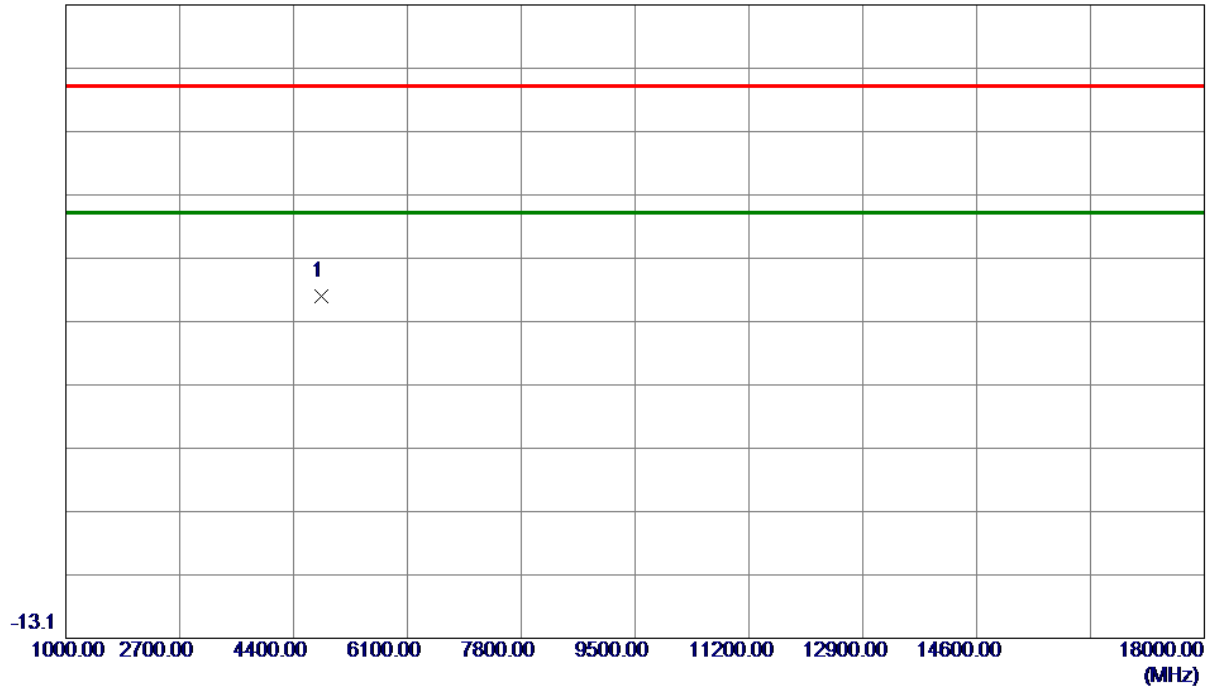


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4824.0000	54.90	-14.06	40.84	74.00	-33.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

120 dBuV/m

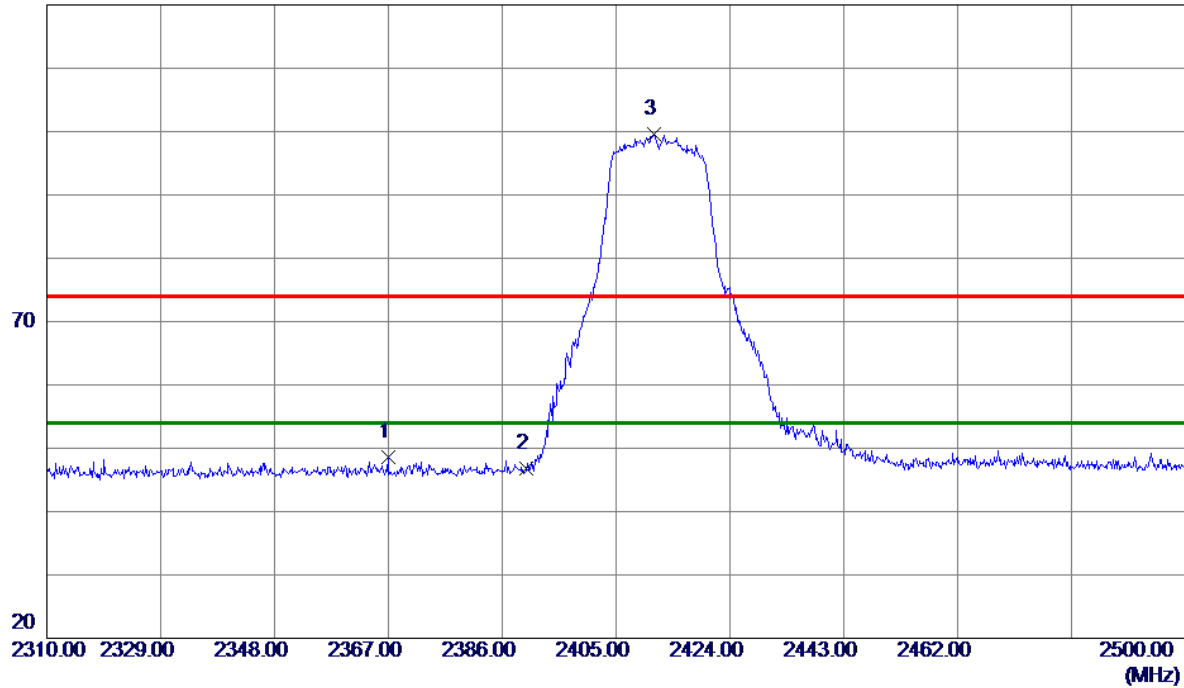


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2366.8959	16.44	32.11	48.55	74.00	-25.45	Peak	
2	2390.0000	14.52	32.20	46.72	74.00	-27.28	Peak	
3 *	2411.3939	67.22	32.29	99.51	74.00	25.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

86.9 dBuV/m

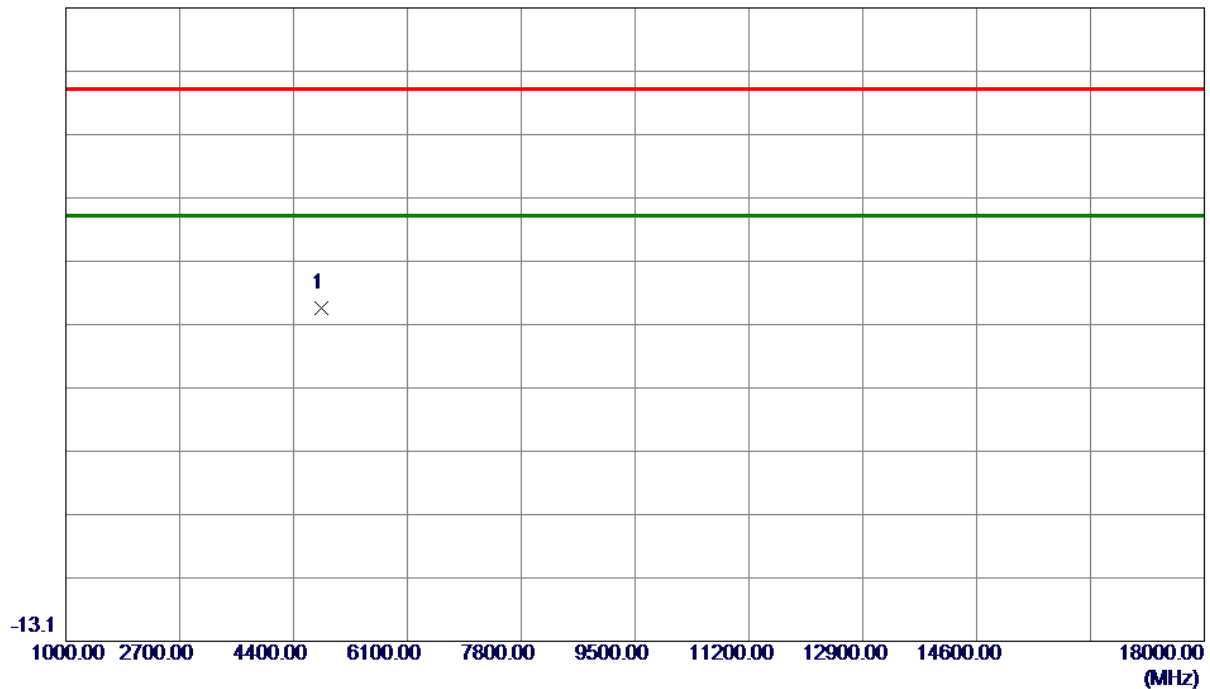


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4824.0000	53.51	-14.06	39.45	74.00	-34.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

86.9 dBuV/m

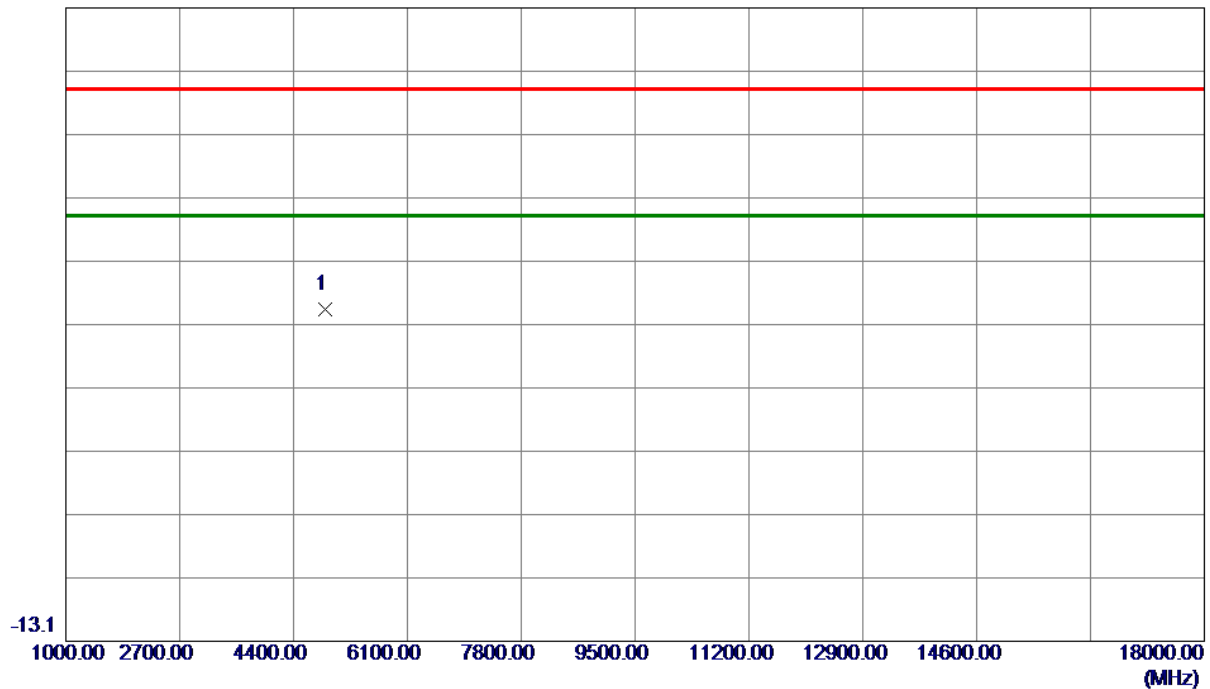


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.0000	53.16	-13.89	39.27	74.00	-34.73	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

86.9 dBuV/m

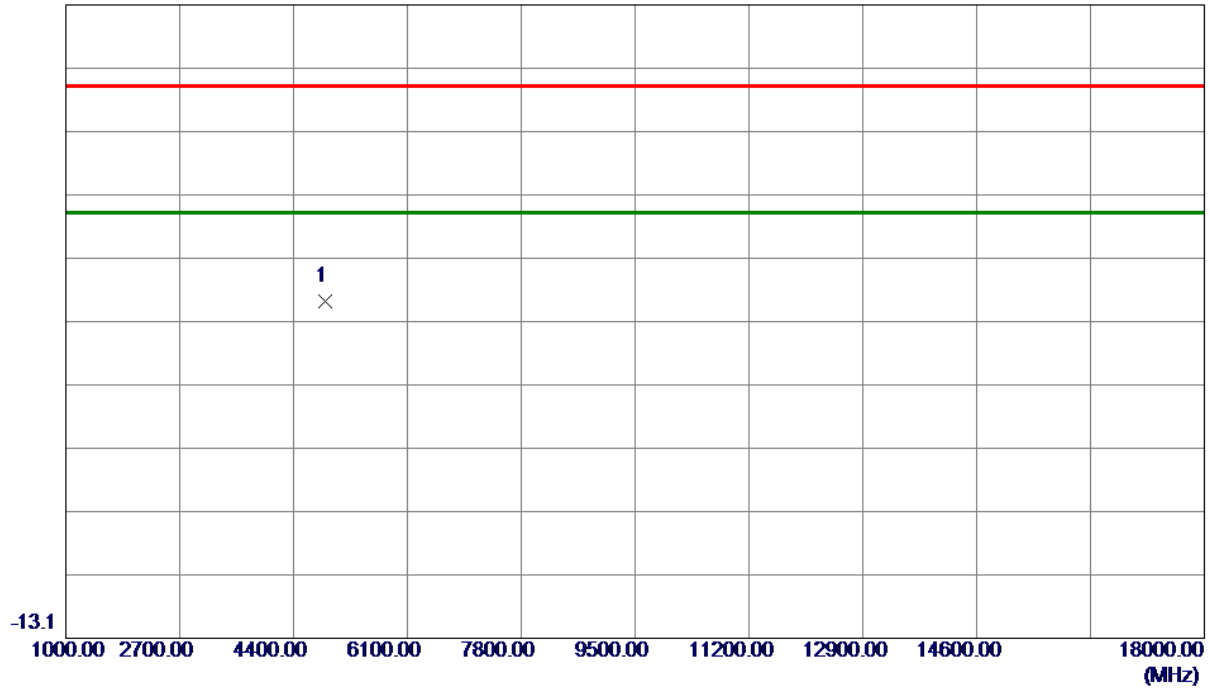


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.0000	54.04	-13.89	40.15	74.00	-33.85	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

120 dBuV/m

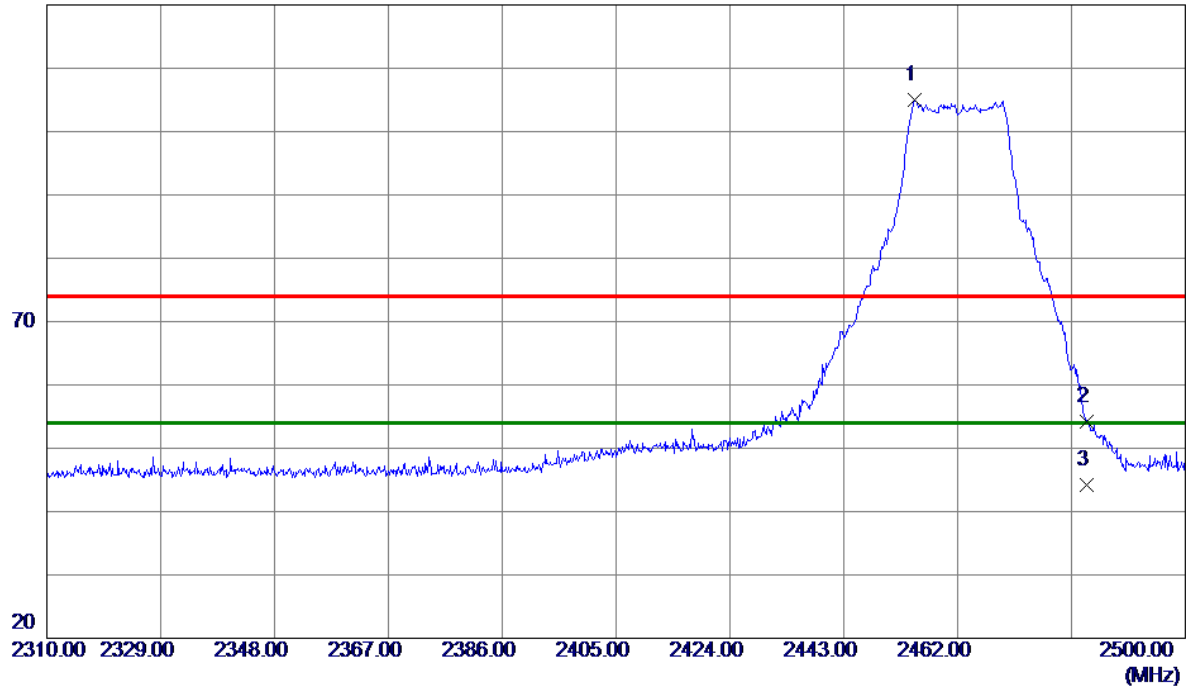

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2454.8850	72.50	32.47	104.97	74.00	30.97	Peak	
2	2483.5000	21.66	32.58	54.24	74.00	-19.76	Peak	
3	2483.5000	11.66	32.58	44.24	54.00	-9.76	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

86.9 dBuV/m

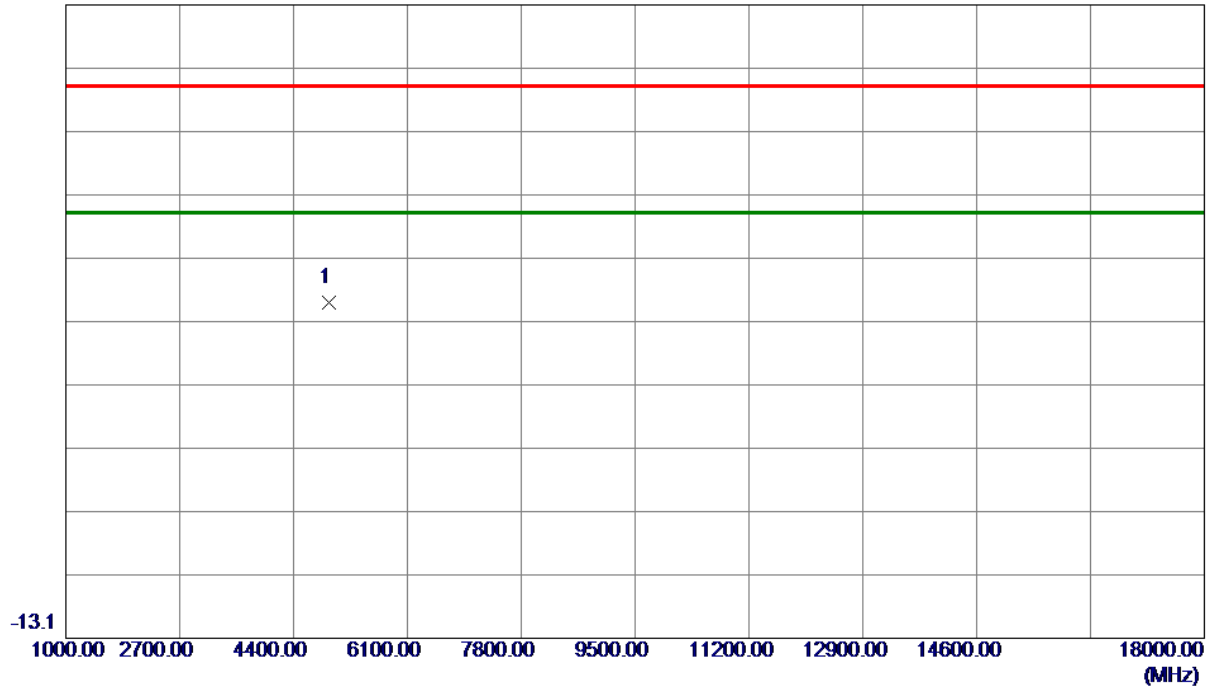


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.0000	53.70	-13.73	39.97	74.00	-34.03	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

120 dBuV/m

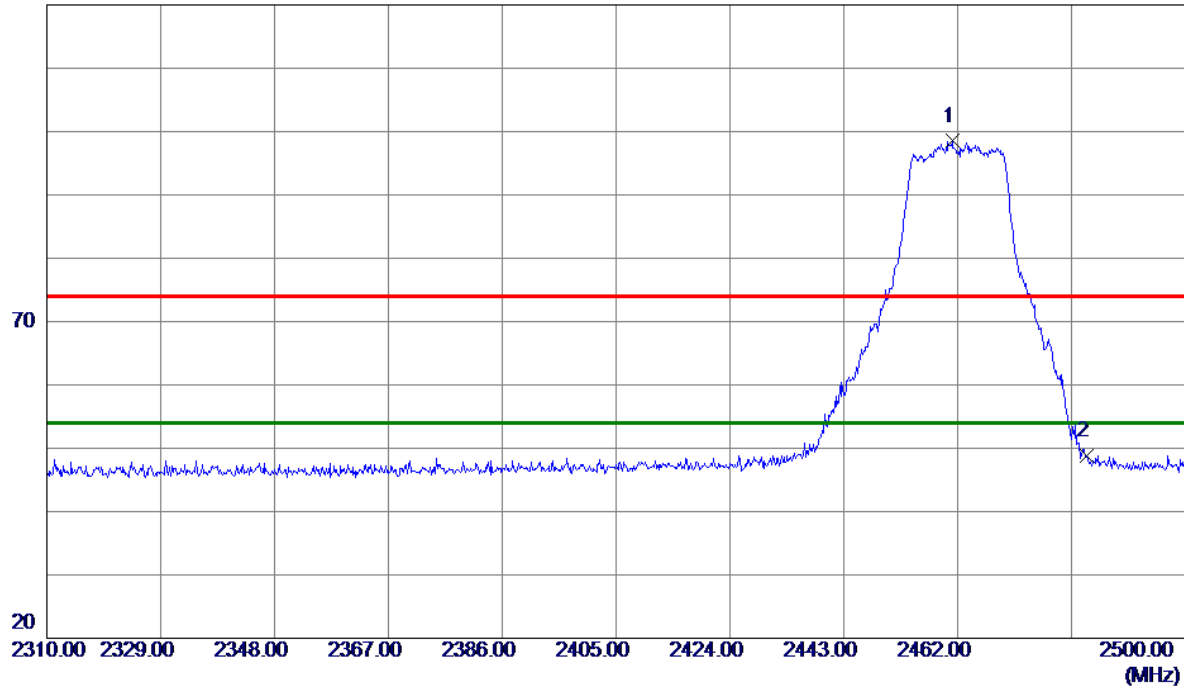

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2461.1640	66.01	32.49	98.50	74.00	24.50	Peak	
2	2483.5000	16.14	32.58	48.72	74.00	-25.28	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

86.9 dBuV/m

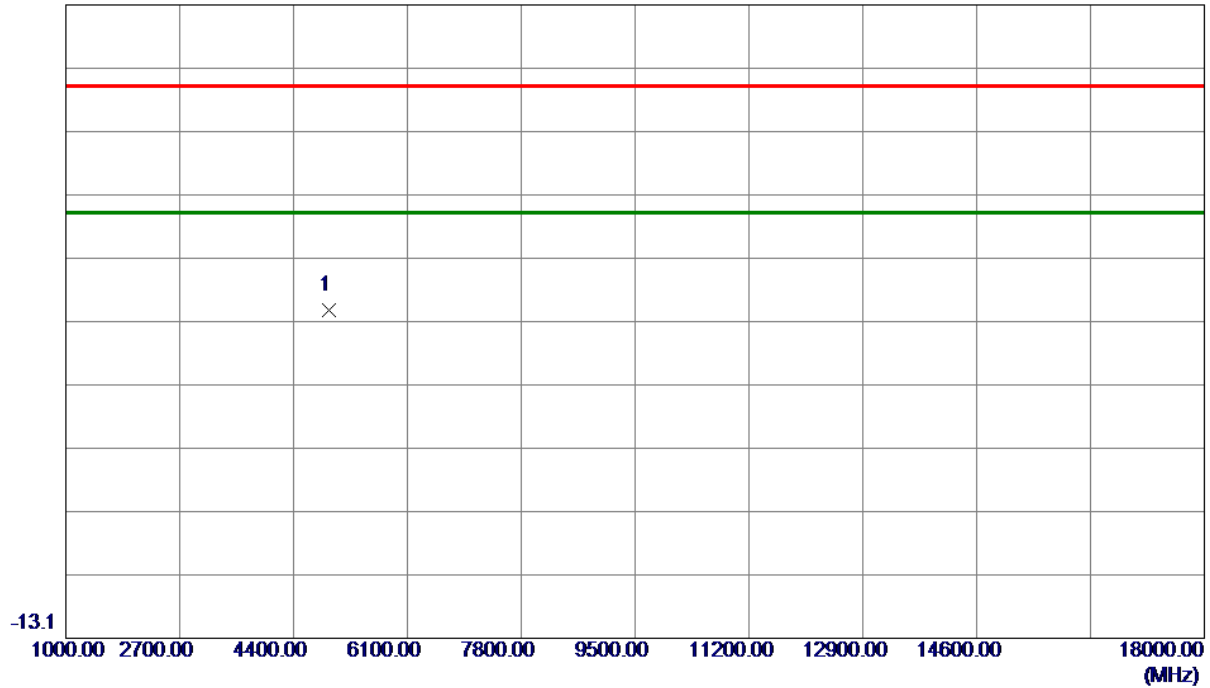


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.0000	52.41	-13.73	38.68	74.00	-35.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

120 dBuV/m

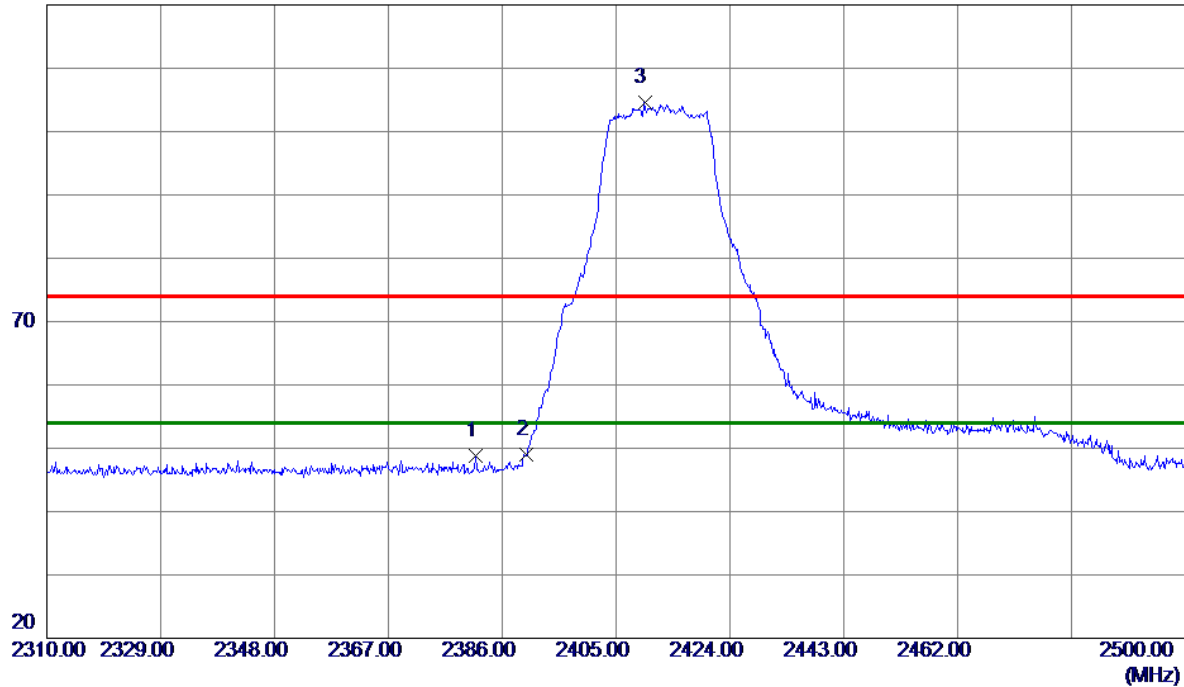


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2381.5730	16.67	32.17	48.84	74.00	-25.16	Peak	
2	2390.0000	16.86	32.20	49.06	74.00	-24.94	Peak	
3 *	2409.7500	72.23	32.28	104.51	74.00	30.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

86.9 dBuV/m

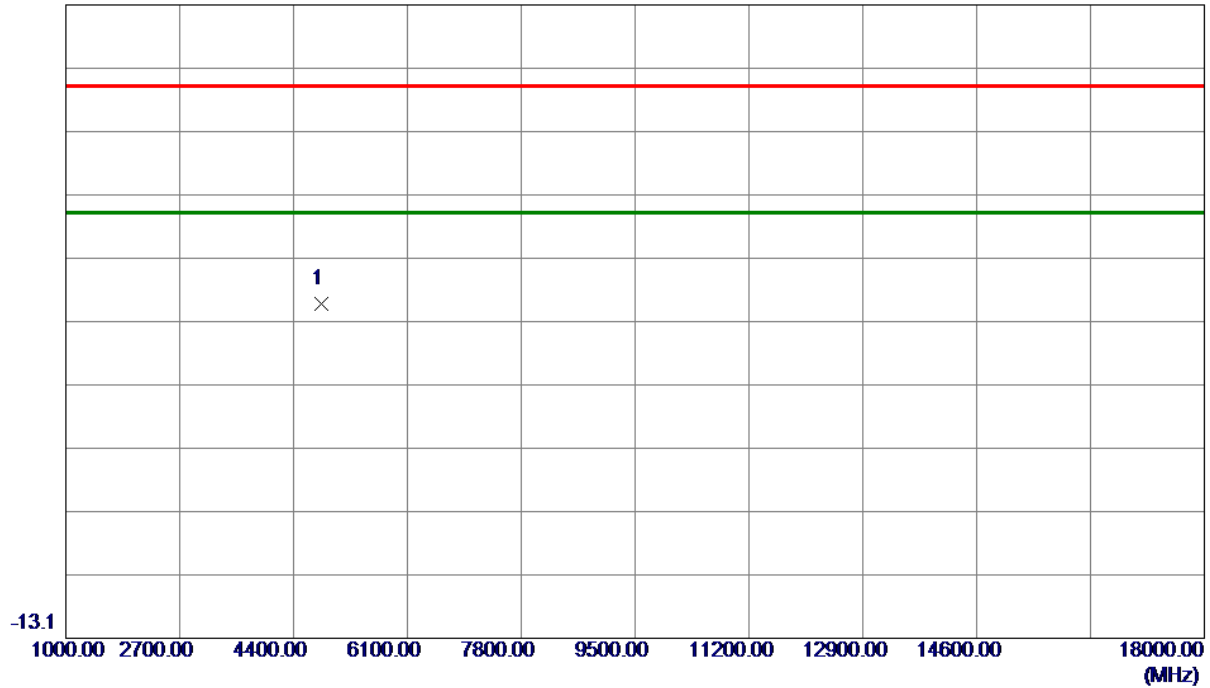


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4824.0000	53.83	-14.06	39.77	74.00	-34.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

120 dBuV/m

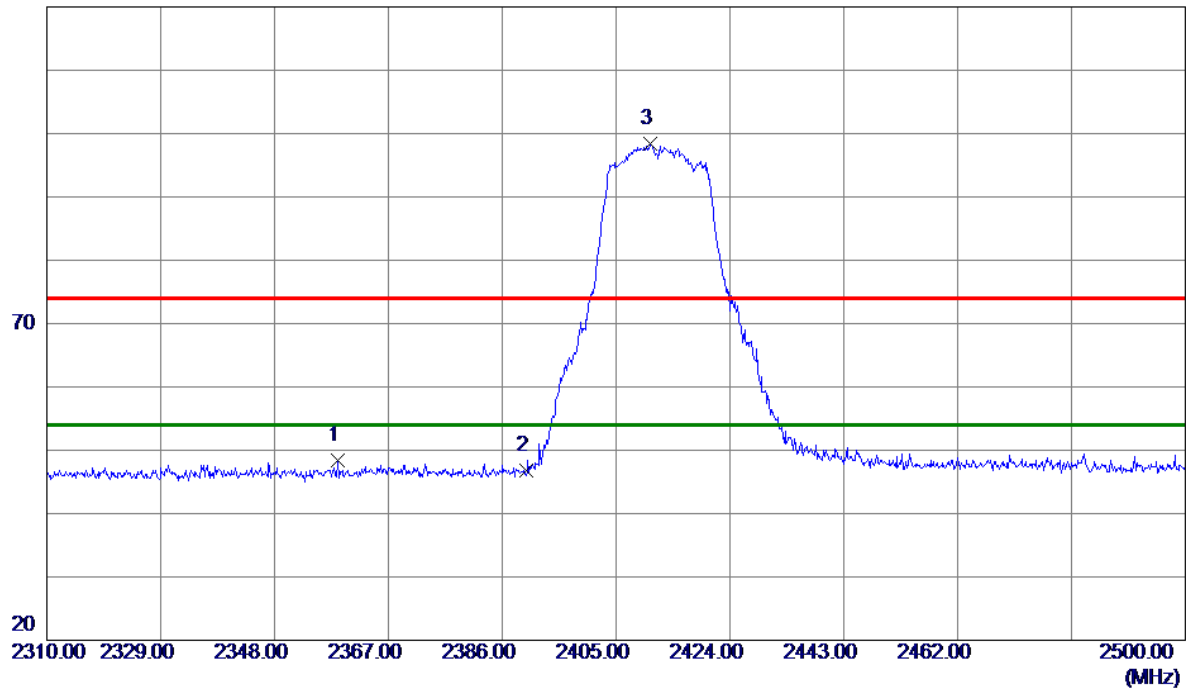


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2358.6399	16.32	32.07	48.39	74.00	-25.61	Peak	
2	2390.0000	14.51	32.20	46.71	74.00	-27.29	Peak	
3 *	2410.7950	66.12	32.29	98.41	74.00	24.41	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

86.9 dBuV/m

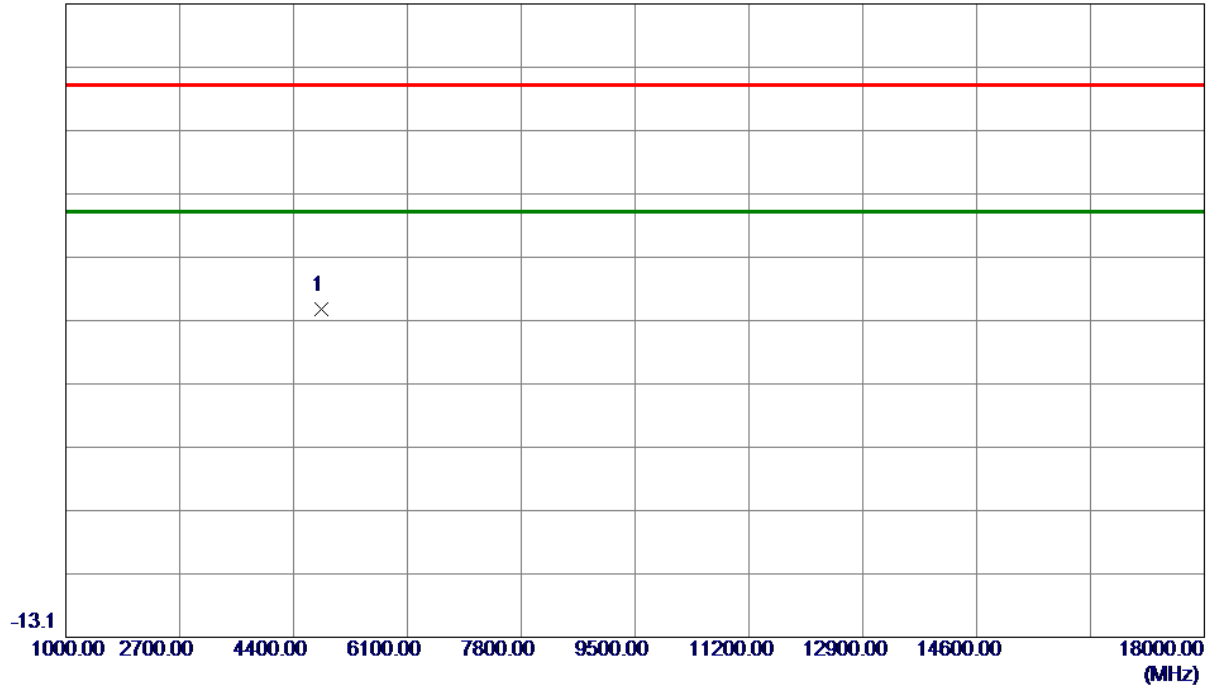


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4824.0000	52.66	-14.06	38.60	74.00	-35.40	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

86.9 dBuV/m

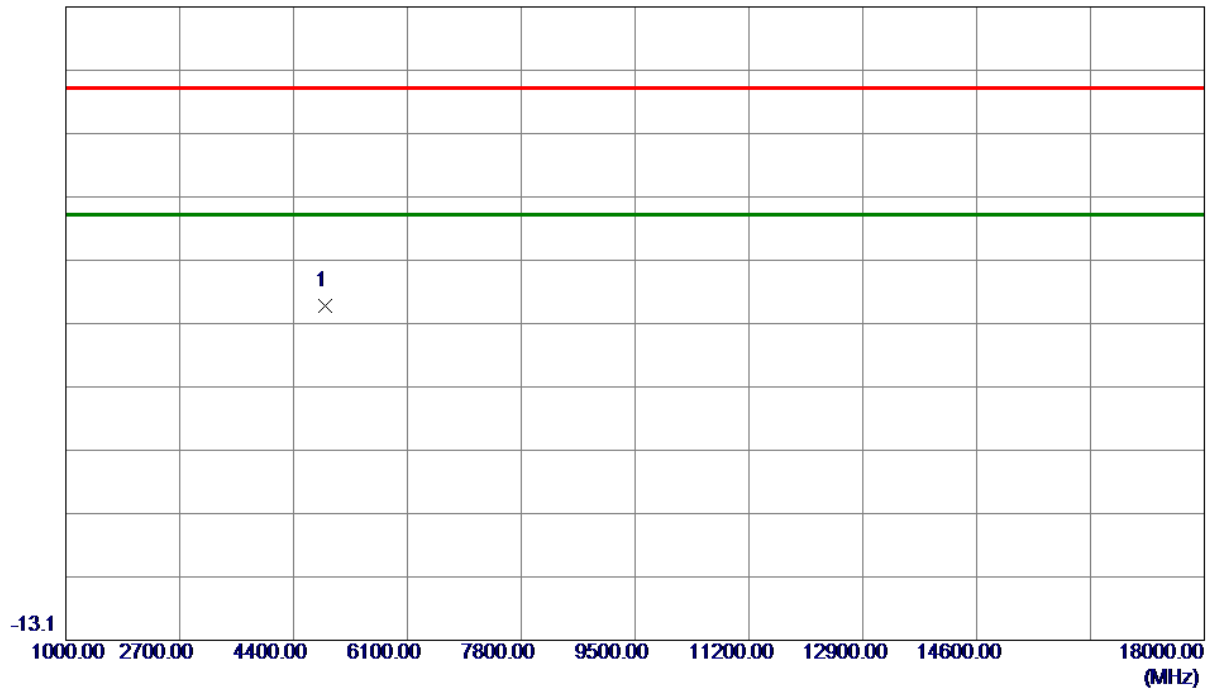


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.0000	53.60	-13.89	39.71	74.00	-34.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

86.9 dBuV/m

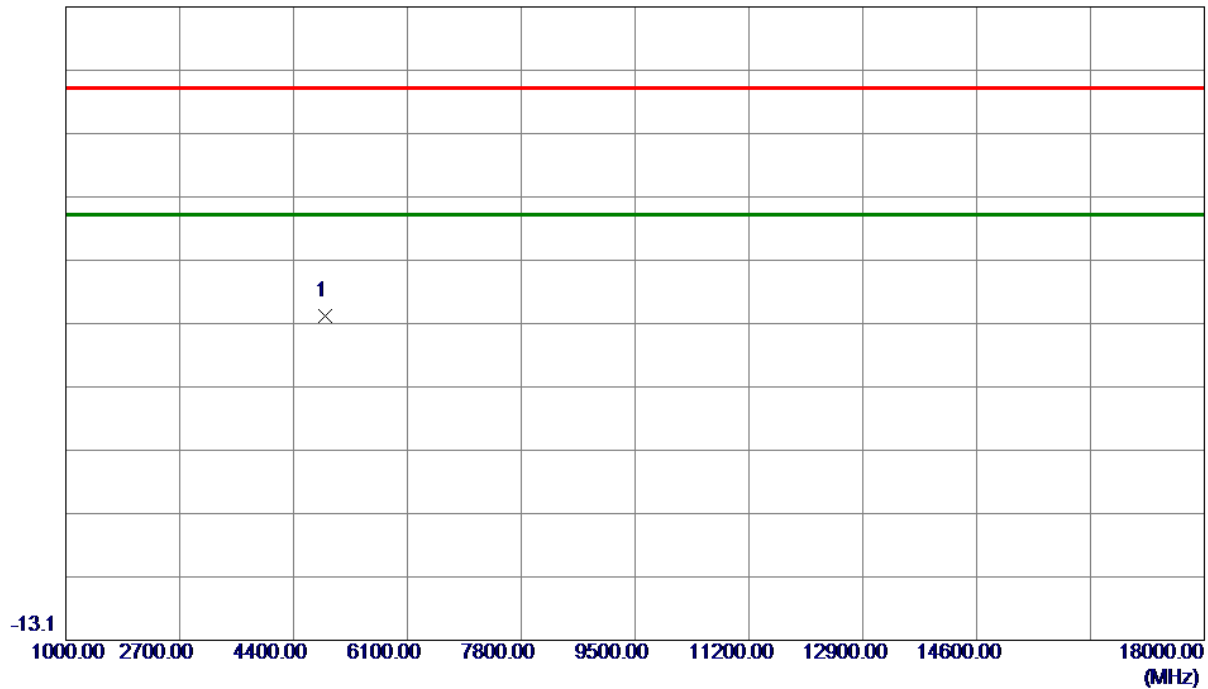


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.0000	51.90	-13.89	38.01	74.00	-35.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

120 dBuV/m

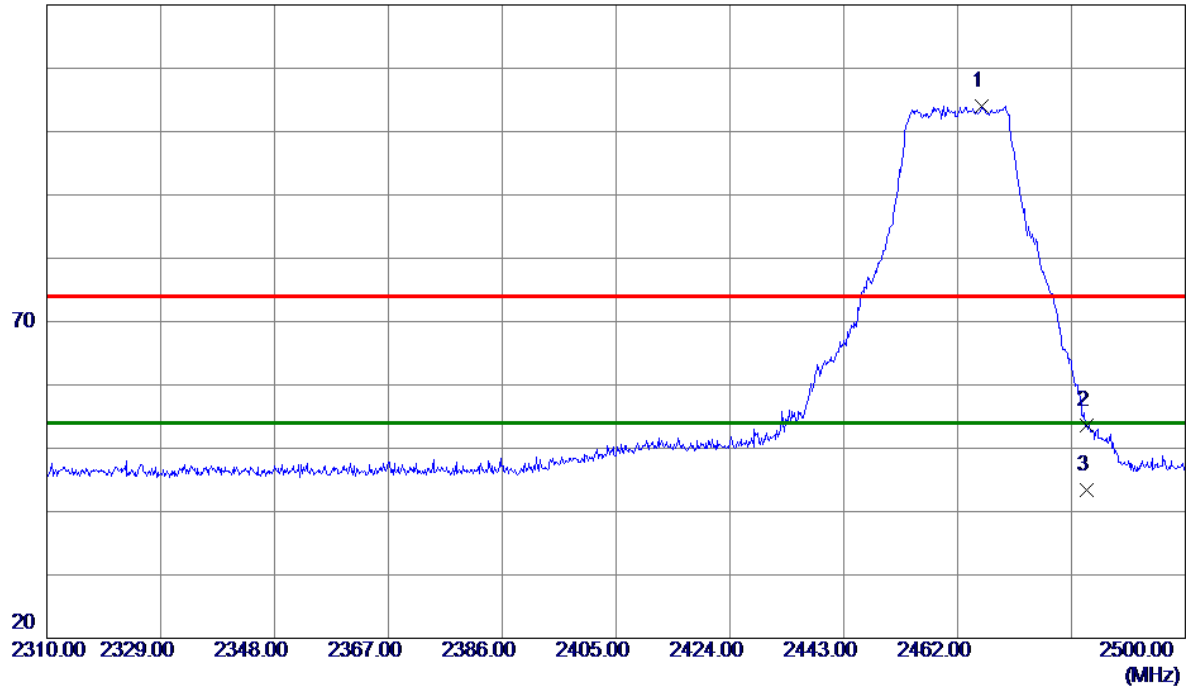

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2465.9900	71.54	32.51	104.05	74.00	30.05	Peak	
2	2483.5000	20.98	32.58	53.56	74.00	-20.44	Peak	
3	2483.5000	10.89	32.58	43.47	54.00	-10.53	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

86.9 dBuV/m

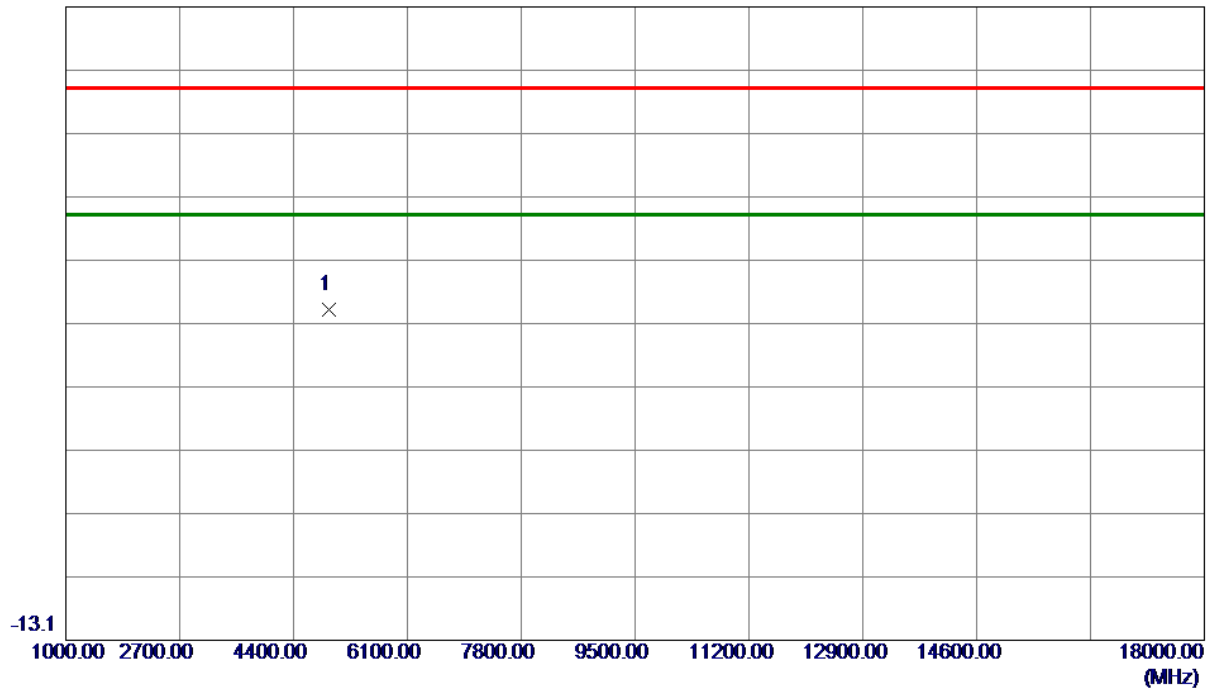


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.0000	52.78	-13.73	39.05	74.00	-34.95	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

120 dBuV/m

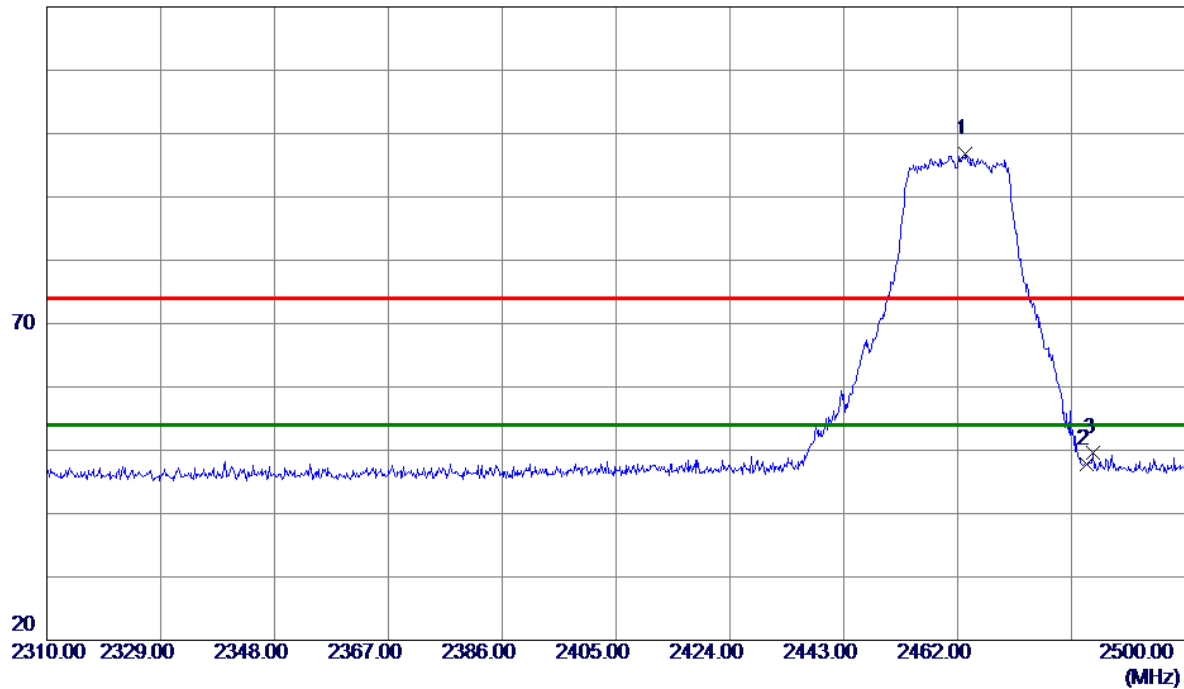


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2463.3490	64.36	32.50	96.86	74.00	22.86	Peak	
2	2483.5000	15.28	32.58	47.86	74.00	-26.14	Peak	
3	2484.4860	17.04	32.59	49.63	74.00	-24.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

86.9 dBuV/m

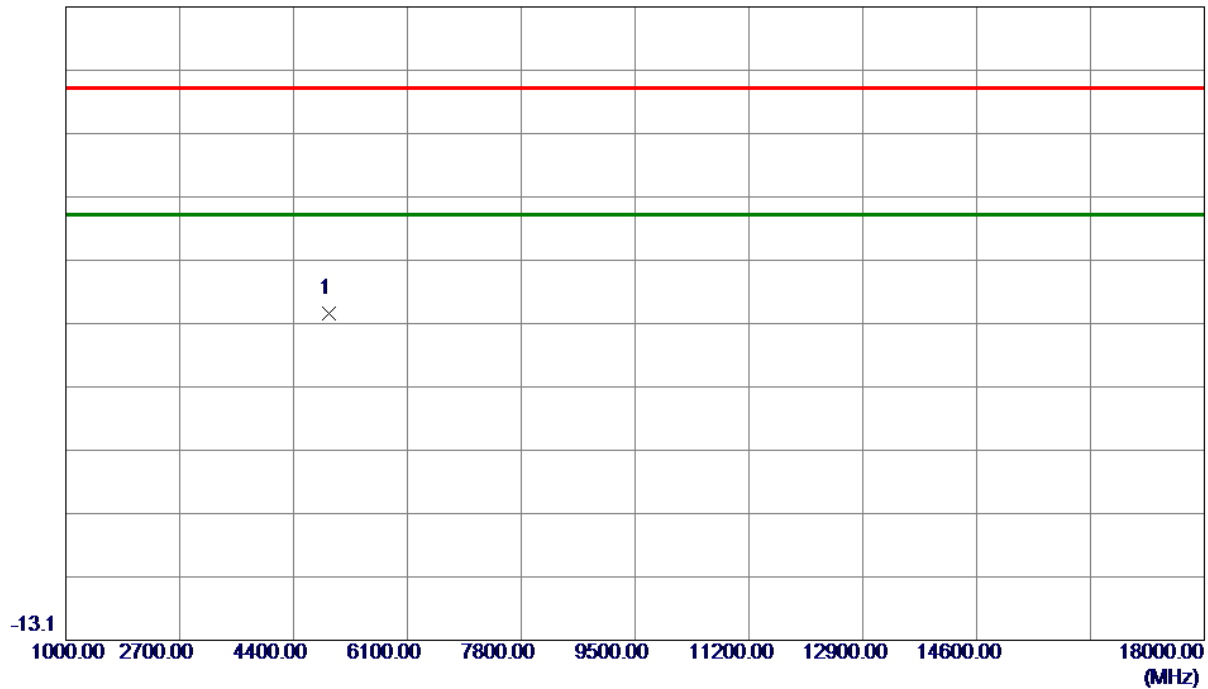


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.0000	52.31	-13.73	38.58	74.00	-35.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

120 dBuV/m

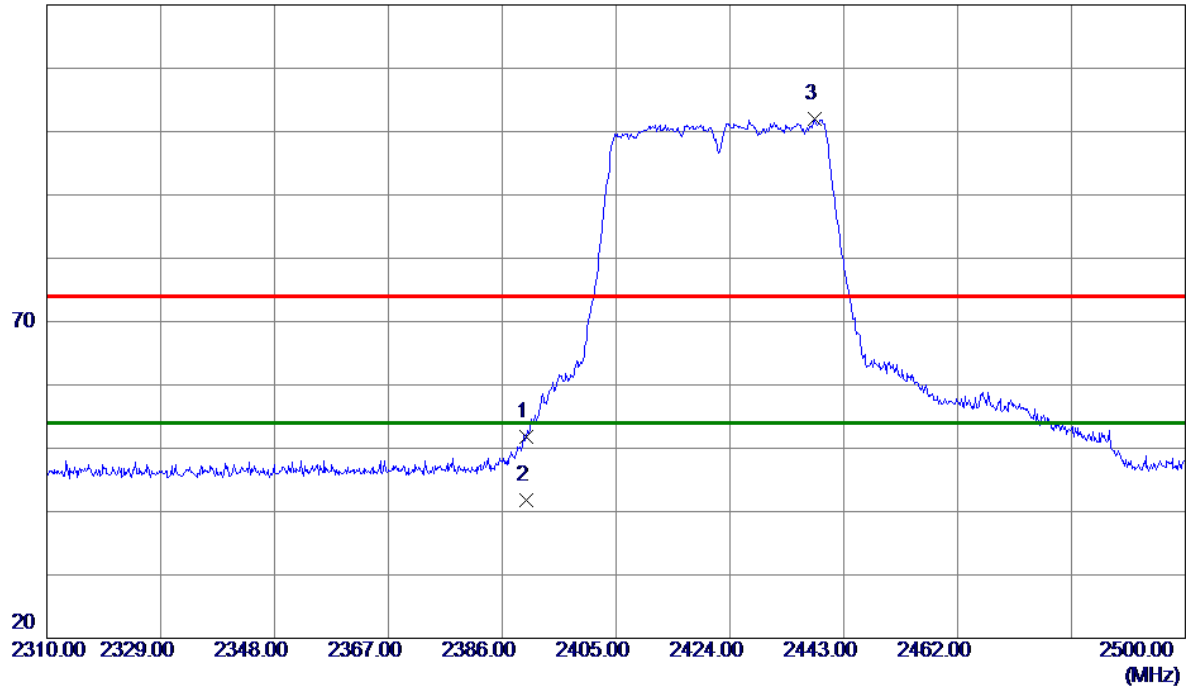


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	19.55	32.20	51.75	74.00	-22.25	Peak	
2	2390.0000	9.64	32.20	41.84	54.00	-12.16	AVG	
3 *	2438.2220	69.50	32.40	101.90	74.00	27.90	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

86.9 dBuV/m

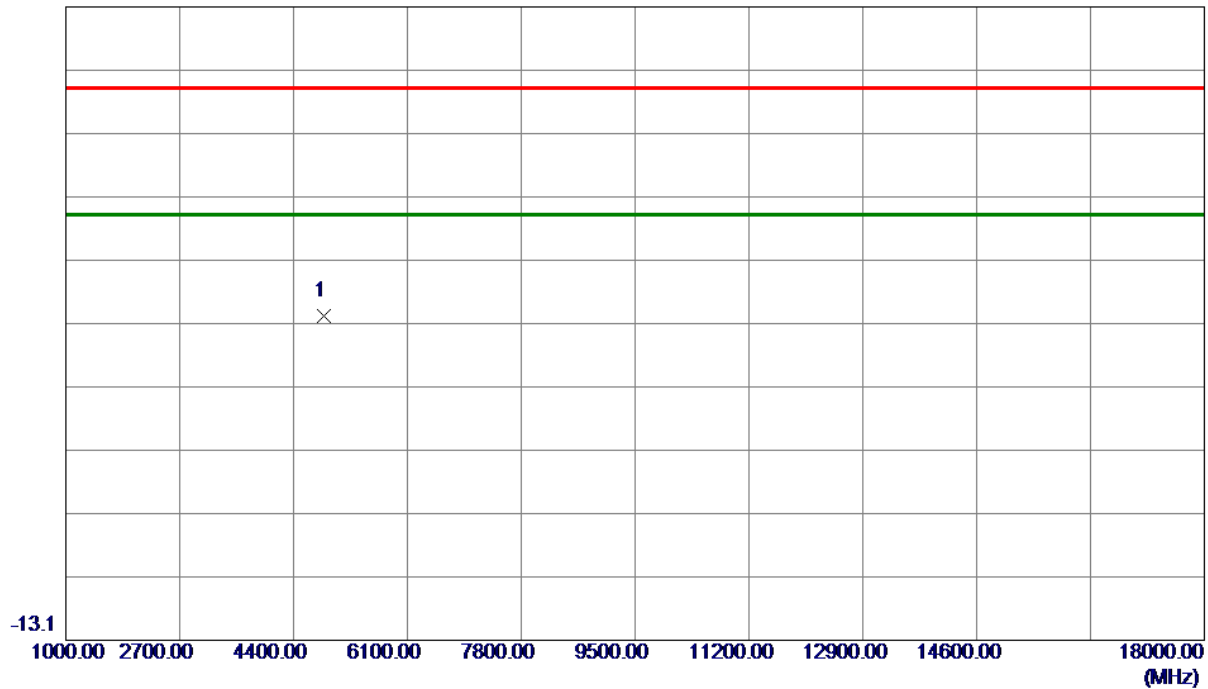


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4844.0000	52.16	-13.99	38.17	74.00	-35.83	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

120 dBuV/m

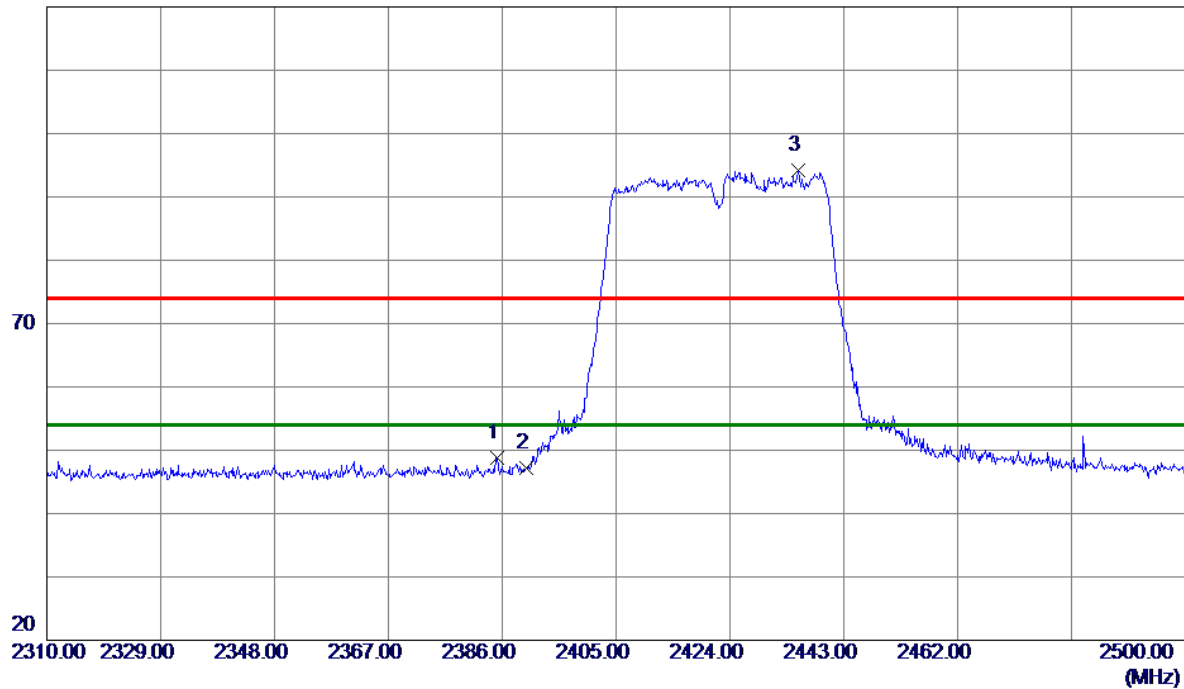


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2385.0500	16.64	32.18	48.82	74.00	-25.18	Peak	
2	2390.0000	15.08	32.20	47.28	74.00	-26.72	Peak	
3 *	2435.4670	61.76	32.39	94.15	74.00	20.15	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

86.9 dBuV/m

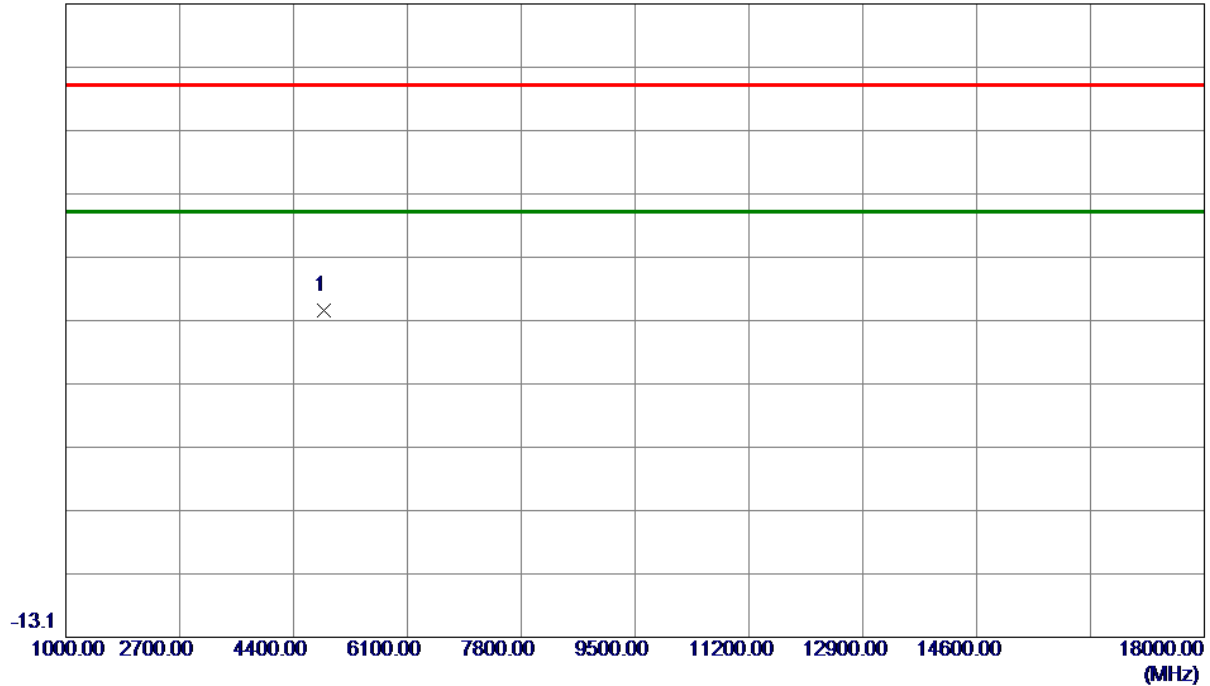


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4844.0000	52.51	-13.99	38.52	74.00	-35.48	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

86.9 dBuV/m

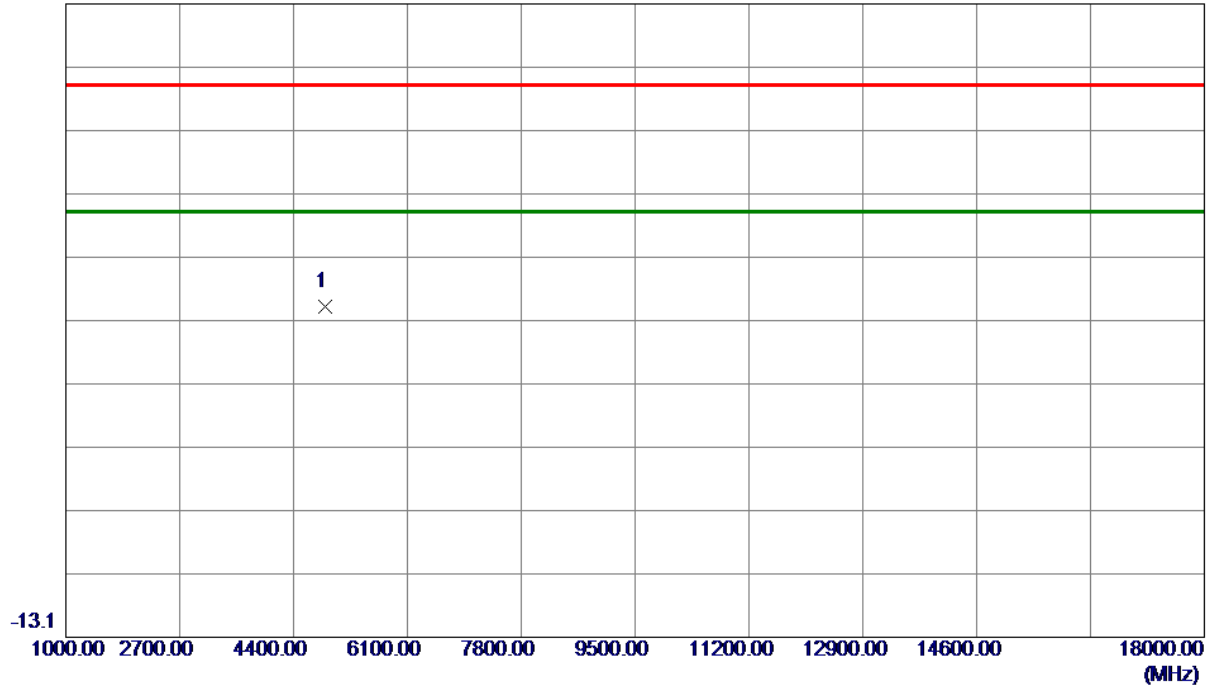


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.0000	52.91	-13.89	39.02	74.00	-34.98	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

86.9 dBuV/m

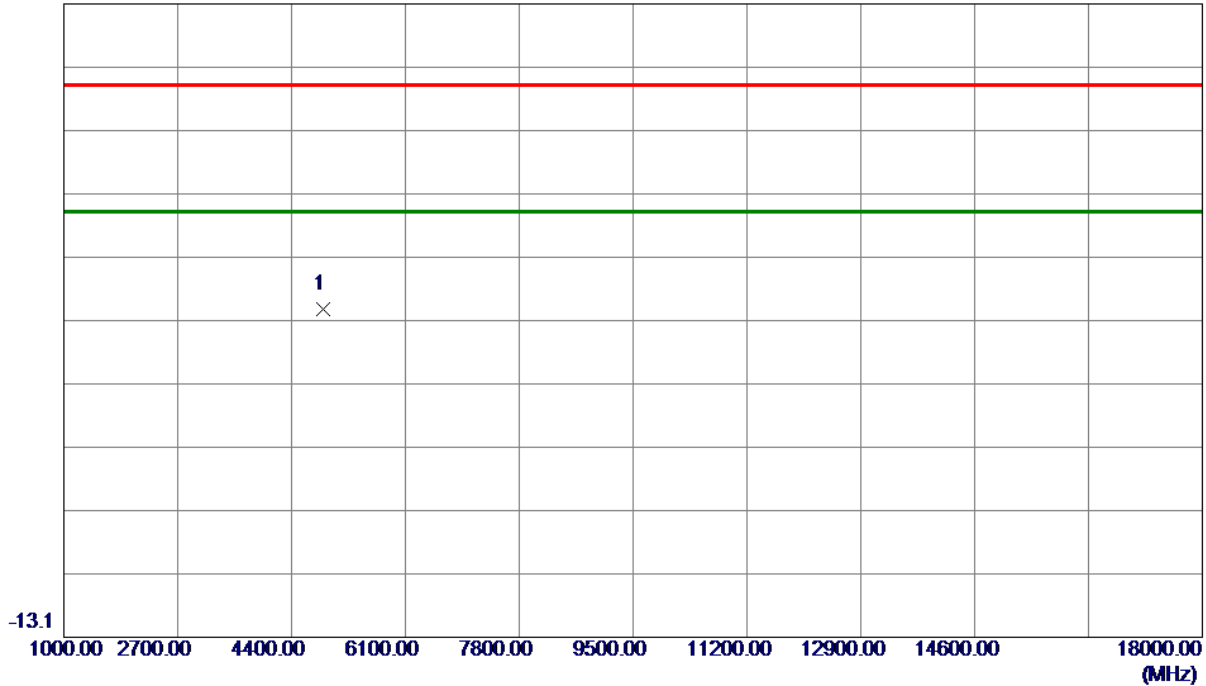


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.0000	52.58	-13.89	38.69	74.00	-35.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

120 dBuV/m

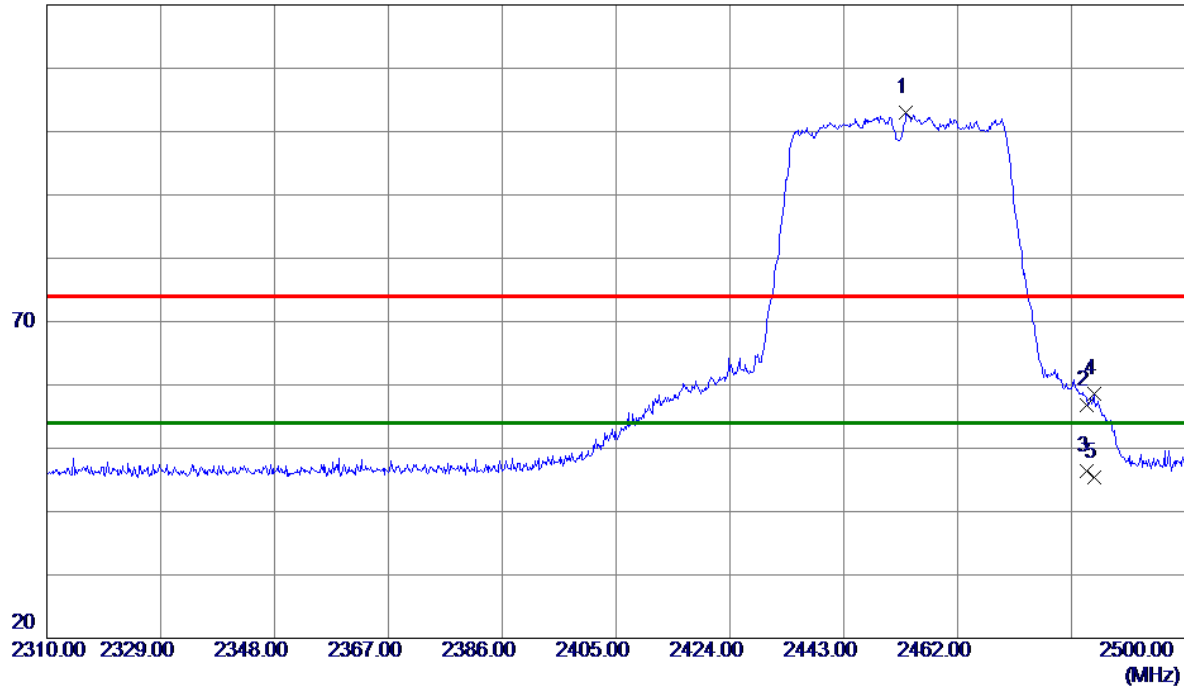

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2453.3650	70.53	32.46	102.99	74.00	28.99	Peak	
2	2483.5000	24.25	32.58	56.83	74.00	-17.17	Peak	
3	2483.5000	13.85	32.58	46.43	54.00	-7.57	AVG	
4	2484.7810	26.02	32.59	58.61	74.00	-15.39	Peak	
5	2484.7810	12.90	32.59	45.49	54.00	-8.51	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

86.9 dBuV/m

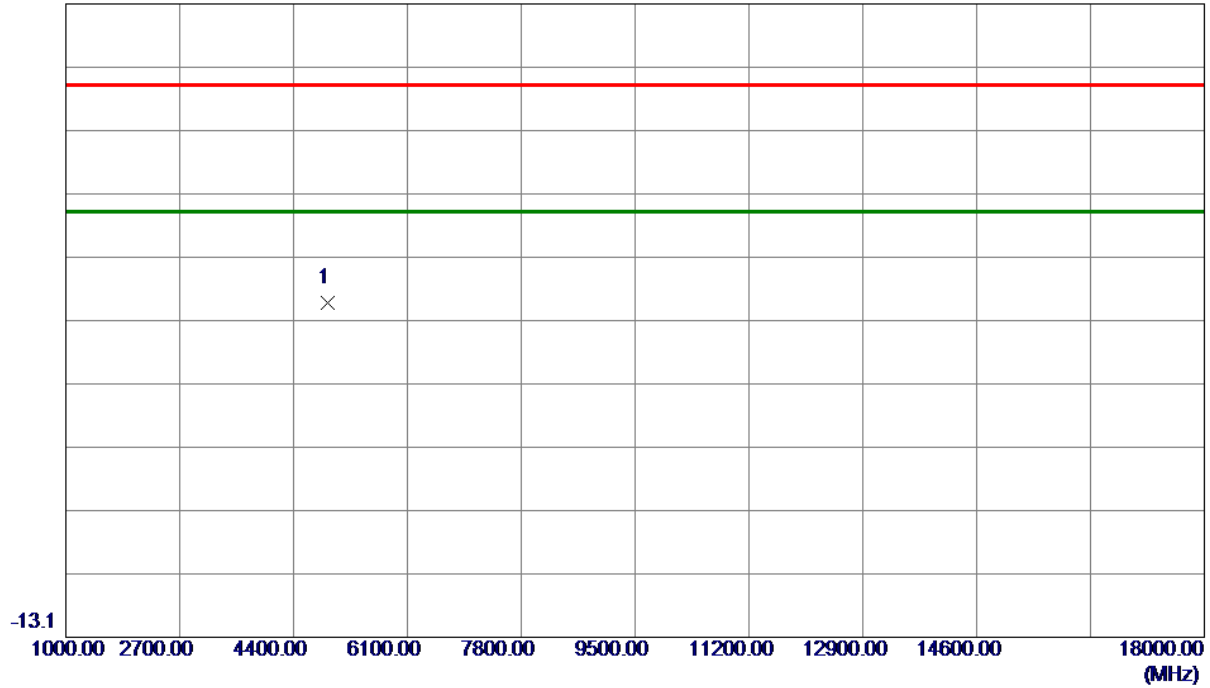


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4904.0000	53.50	-13.80	39.70	74.00	-34.30	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

120 dBuV/m

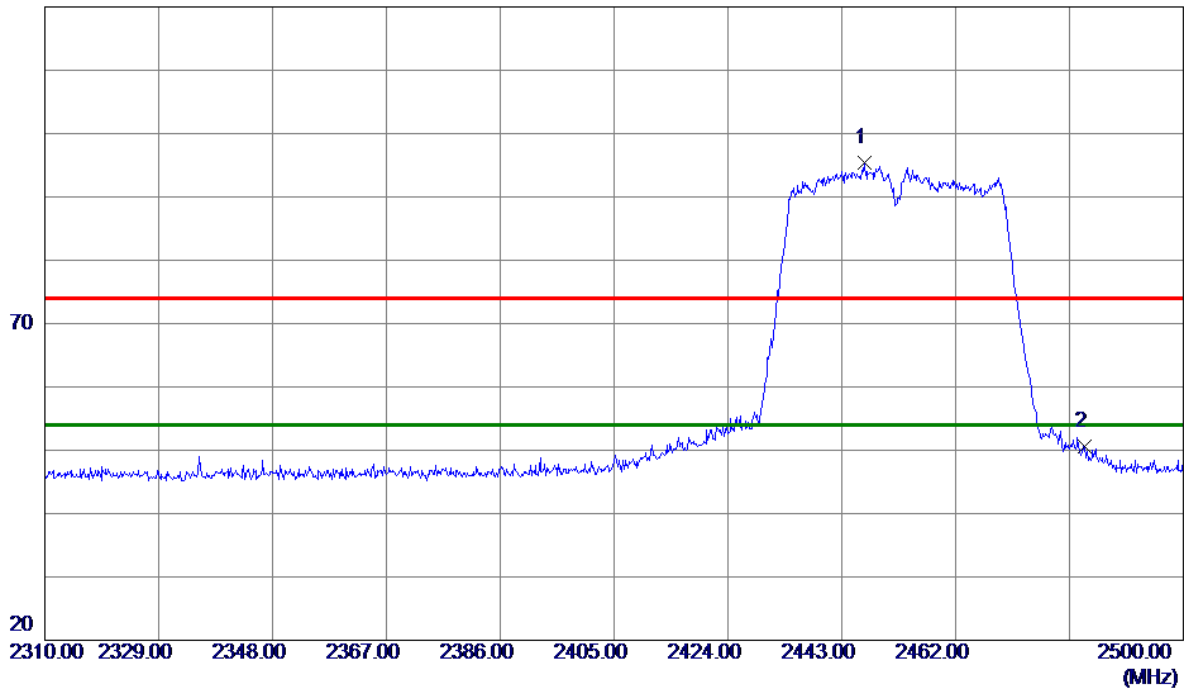


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2446.7430	62.88	32.43	95.31	74.00	21.31	Peak	
2	2483.5000	17.93	32.58	50.51	74.00	-23.49	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

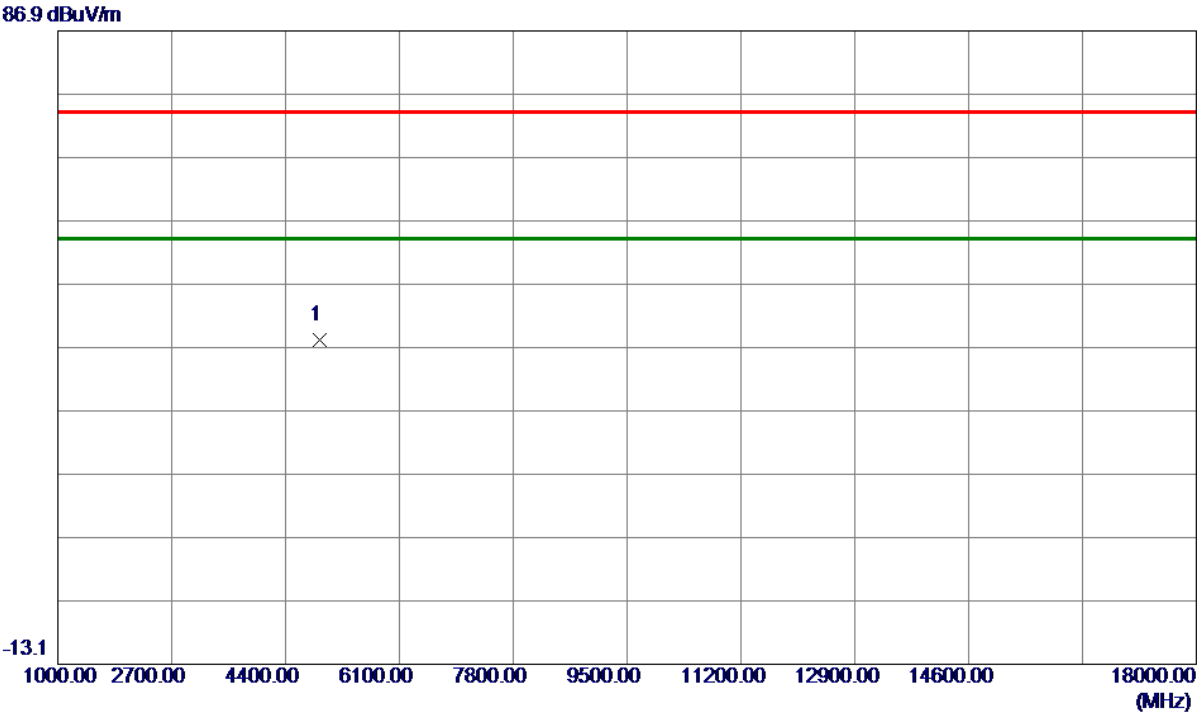


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4904.0000	51.82	-13.80	38.02	74.00	-35.98	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

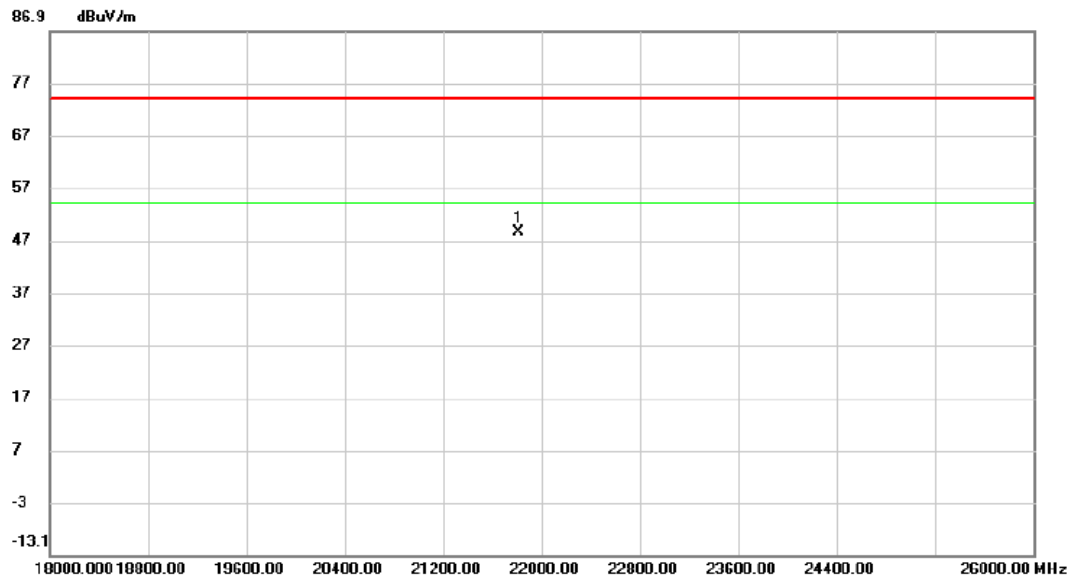


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	21812.672	55.04	-6.53	48.51	74.00	-25.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

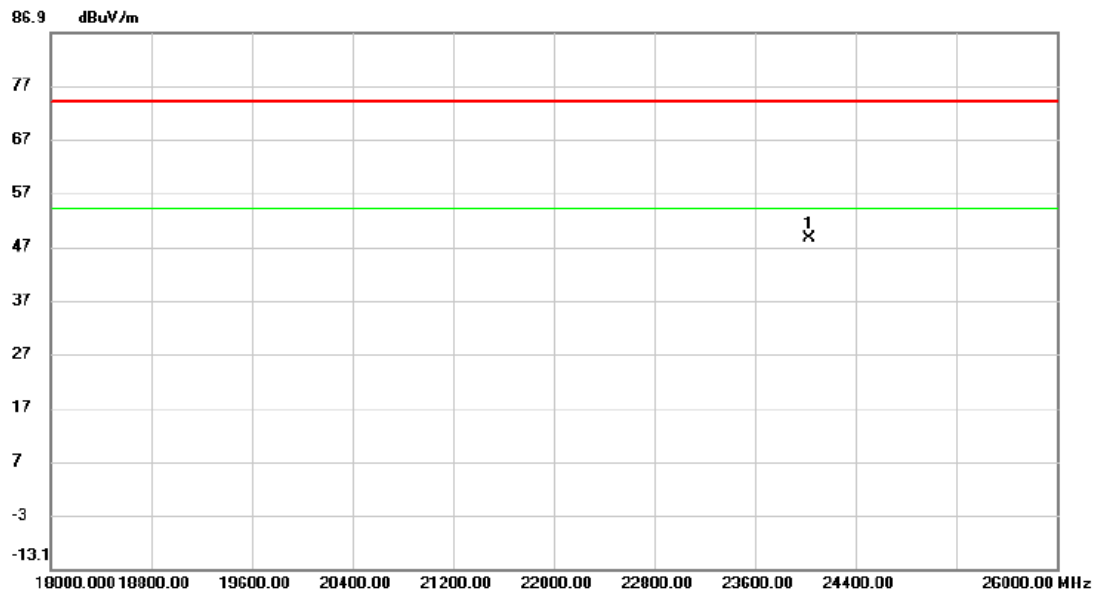


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	24033.149	53.17	-4.74	48.43	74.00	-25.57	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	BT+WIFI 2.4G+WWAN	Polarization	Vertical
-----------	-------------------	--------------	----------

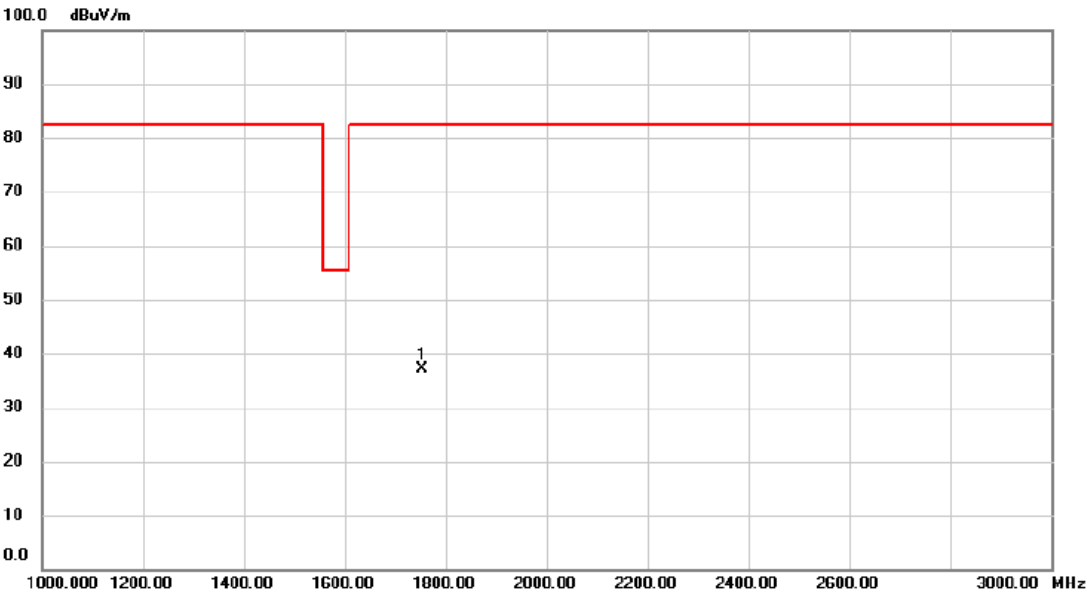

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	1754.000	42.19	-5.18	37.01	82.30	-45.29	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT+WIFI 2.4G+WWAN	Polarization	Horizontal
-----------	-------------------	--------------	------------

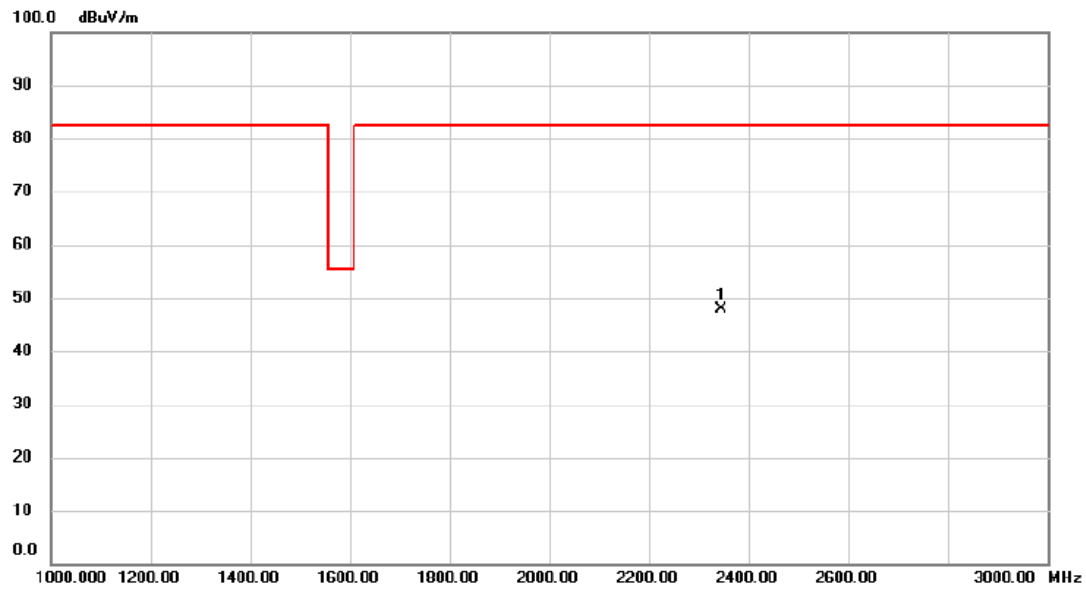


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2344.000	51.12	-3.34	47.78	82.30	-34.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT+WIFI 2.4G+WWAN	Polarization	Vertical
-----------	-------------------	--------------	----------

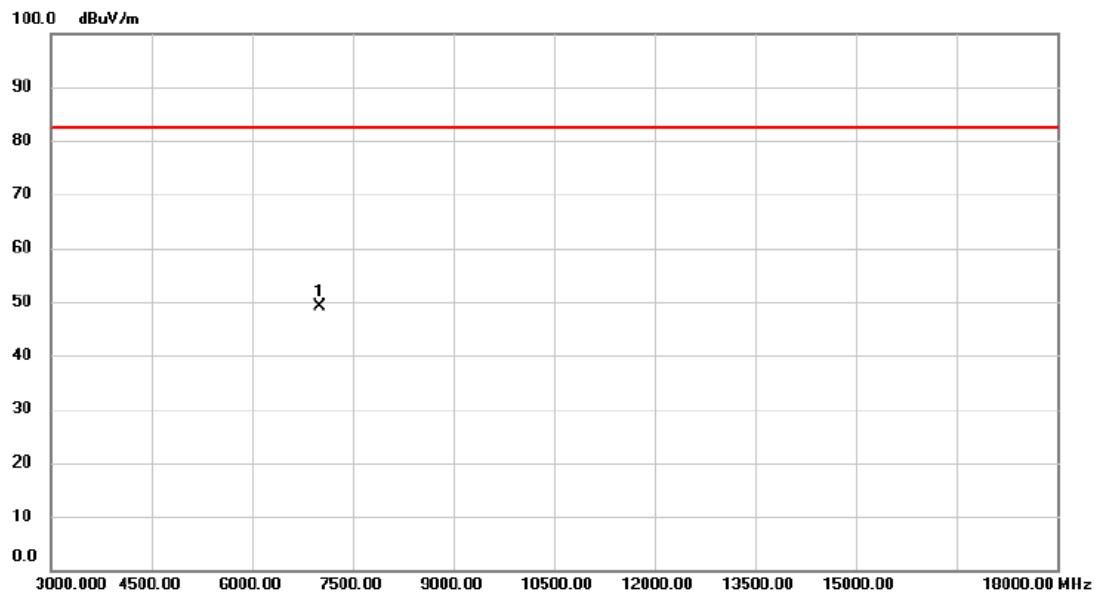


No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	7005.000	40.57	8.52	49.09	82.30	-33.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT+WIFI 2.4G+WWAN	Polarization	Horizontal
-----------	-------------------	--------------	------------

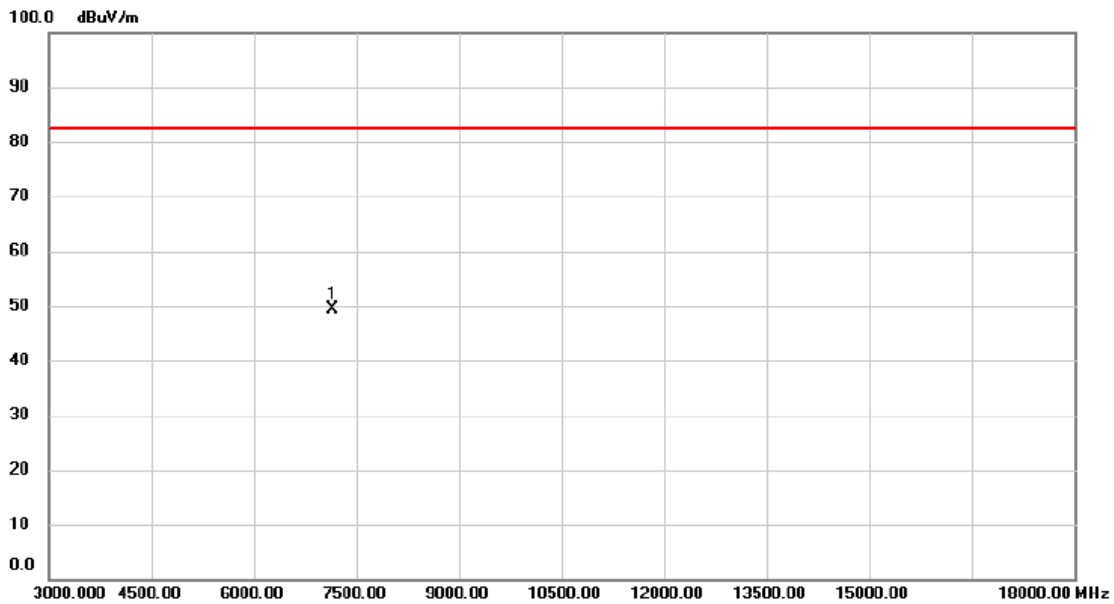


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7140.000	40.81	8.51	49.32	82.30	-32.98	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT+WIFI 2.4G+WWAN	Polarization	Vertical
-----------	-------------------	--------------	----------

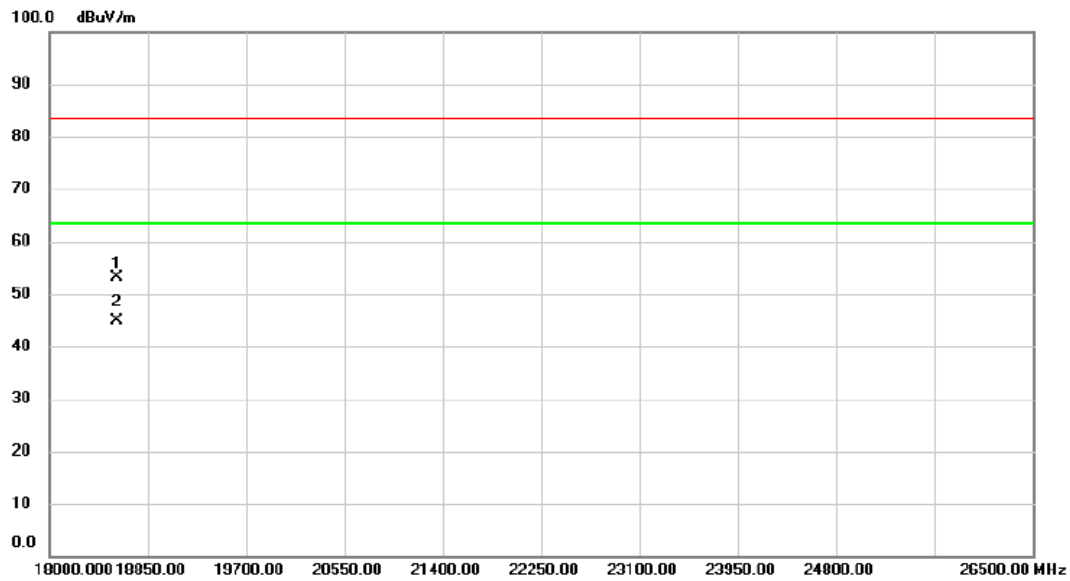


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		18578.000	54.55	-1.54	53.01	83.50	-30.49	peak	
2	*	18578.000	46.36	-1.54	44.82	63.50	-18.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT+WIFI 2.4G+WWAN	Polarization	Horizontal
-----------	-------------------	--------------	------------

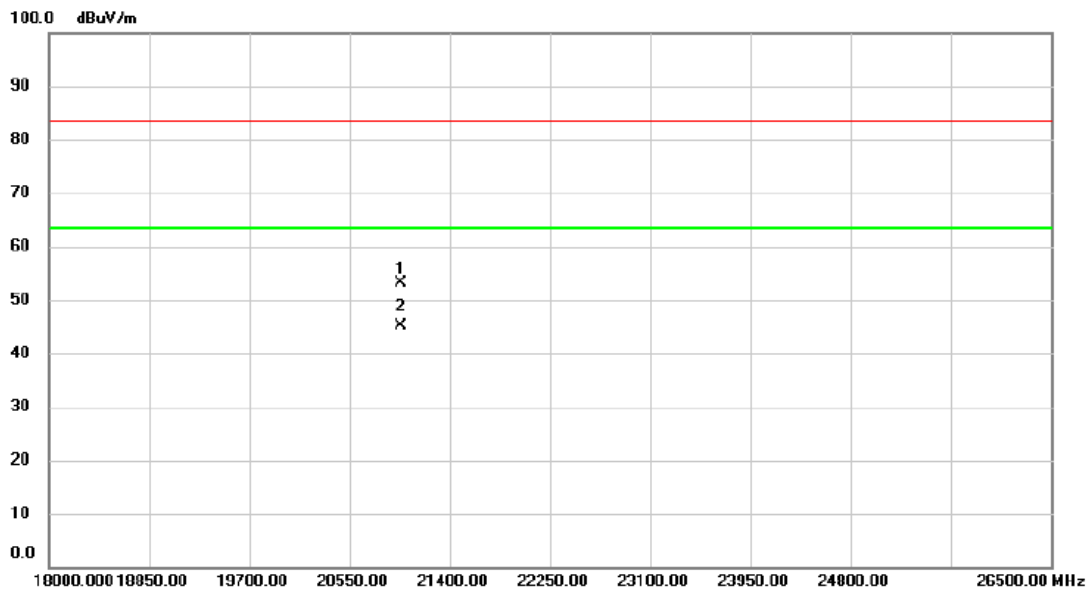

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		20983.500	53.14	-0.04	53.10	83.50	-30.40	peak	
2	*	20983.500	45.28	-0.04	45.24	63.50	-18.26	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - BANDWIDTH

Test Mode	TX B Mode
-----------	-----------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	8.096	13.471	0.5	Complies
06	2437	8.098	13.632	0.5	Complies
11	2462	8.101	13.900	0.5	Complies

CH01

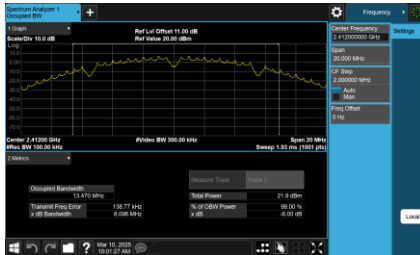


CH06



6 dB Bandwidth

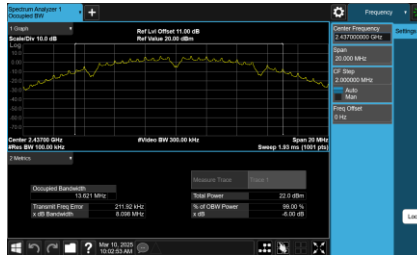

CH11

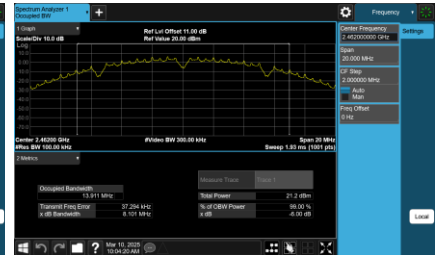


99 % Occupied Bandwidth

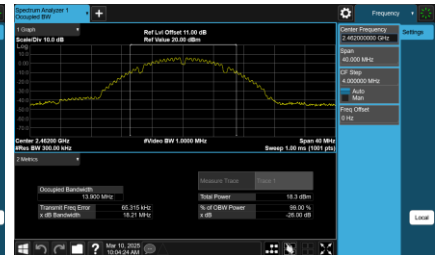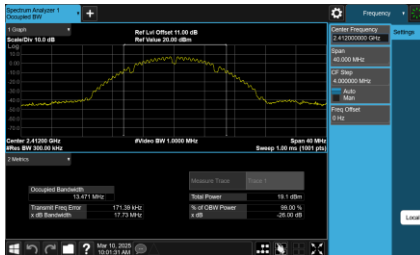


Test Mode	TX G Mode
-----------	-----------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	15.160	16.657	0.5	Complies
06	2437	15.430	16.707	0.5	Complies
11	2462	15.800	16.799	0.5	Complies


CH01

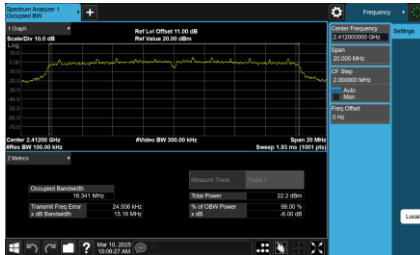




CH06
6 dB Bandwidth

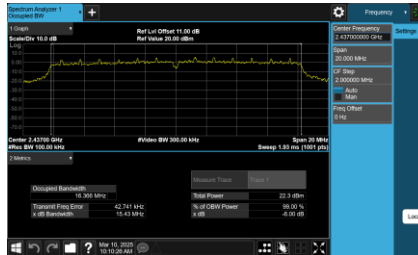

CH11

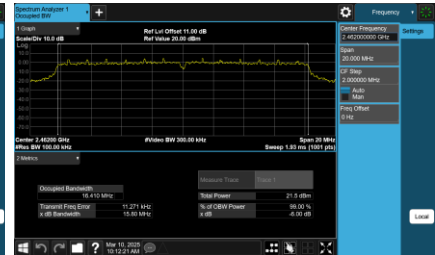


99 % Occupied Bandwidth

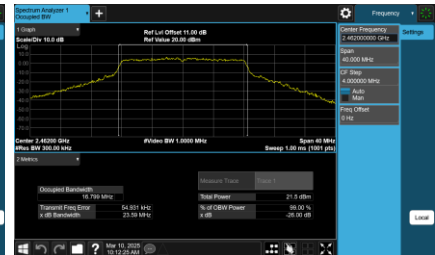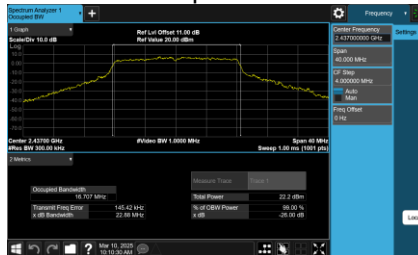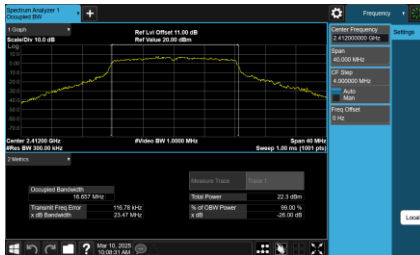

Test Mode	TX N(HT20) Mode
-----------	-----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	15.150	17.821	0.5	Complies
06	2437	15.970	17.874	0.5	Complies
11	2462	15.960	17.960	0.5	Complies

CH01

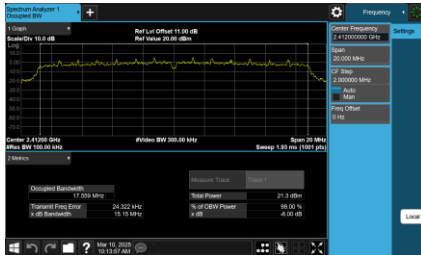


CH06




6 dB Bandwidth

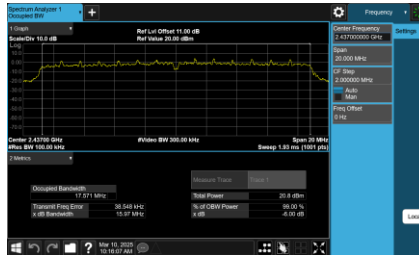

CH11

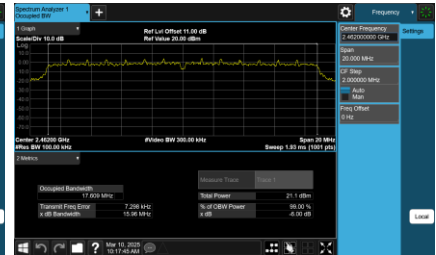


99 % Occupied Bandwidth

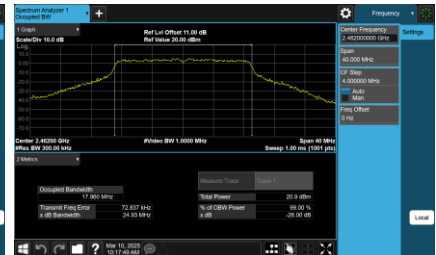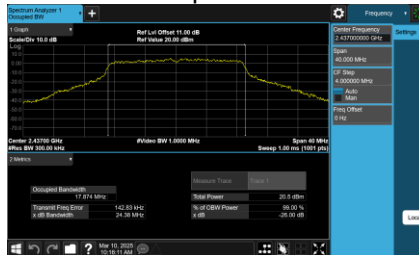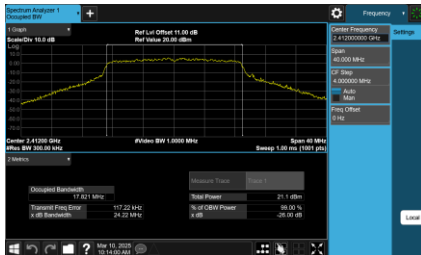

Test Mode	TX N(HT40) Mode
-----------	-----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
03	2422	35.780	36.471	0.5	Complies
06	2437	35.160	36.360	0.5	Complies
09	2452	35.180	36.394	0.5	Complies

CH03

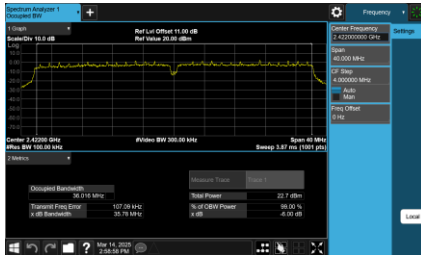


CH06




6 dB Bandwidth

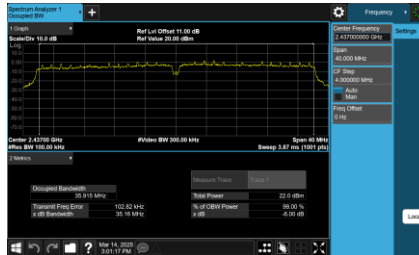

CH09

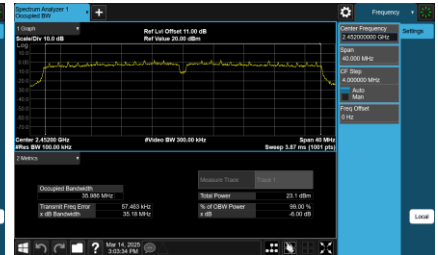

99 % Occupied Bandwidth

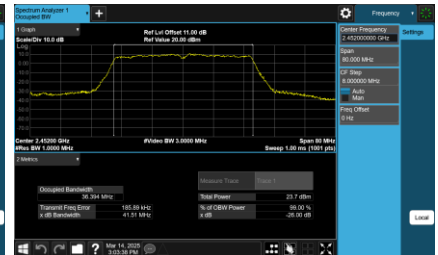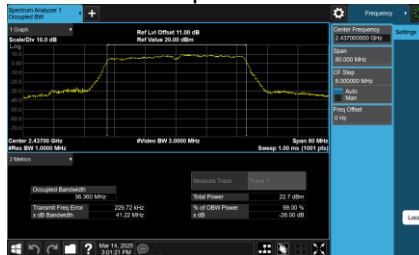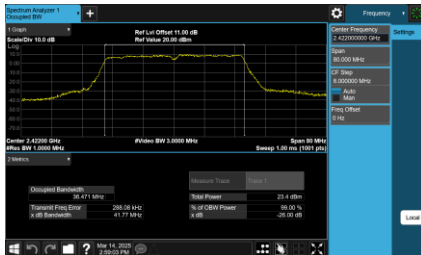

APPENDIX E - MAXIMUM OUTPUT POWER

Test Mode	TX B Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.41	0	16.41	30.00	1.0000	Complies
06	2437	16.31	0	16.31	30.00	1.0000	Complies
11	2462	16.32	0	16.32	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.32	0	16.32	30.00	1.0000	Complies
06	2437	16.11	0	16.11	30.00	1.0000	Complies
11	2462	15.99	0	15.99	30.00	1.0000	Complies

Test Mode	TX N(HT20) Mode_Ant. 1
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	15.18	0	15.18	30.00	1.0000	Complies
06	2437	15.06	0	15.06	30.00	1.0000	Complies
11	2462	15.00	0	15.00	30.00	1.0000	Complies


Test Mode	TX N(HT40) Mode_Ant. 1
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	15.11	0.09	15.20	30.00	1.0000	Complies
06	2437	15.27	0.09	15.36	30.00	1.0000	Complies
09	2452	15.33	0.09	15.42	30.00	1.0000	Complies


APPENDIX F - CONDUCTED SPURIOUS EMISSIONS

Test Mode TX B Mode_Ant. 1


Bandedge-CH01

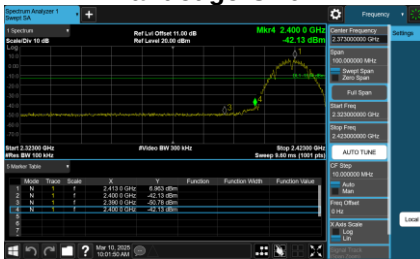




Bandedge-CH11

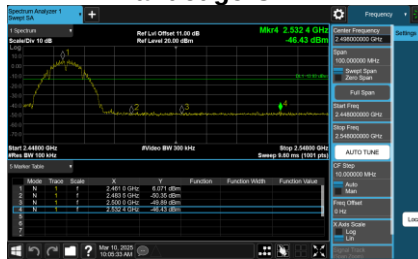




CH01 – 10th Harmonic of the fundamental frequency

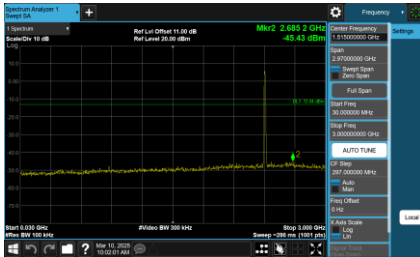

CH06 – 10th Harmonic of the fundamental frequency

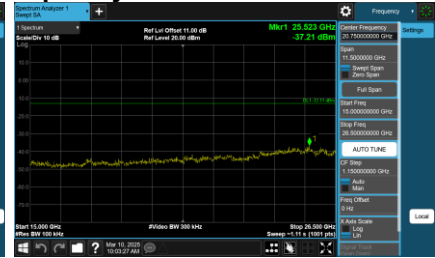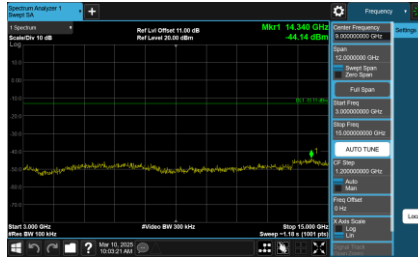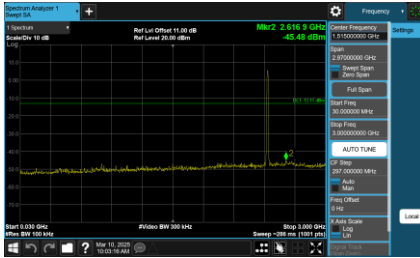

CH11 – 10th Harmonic of the fundamental frequency

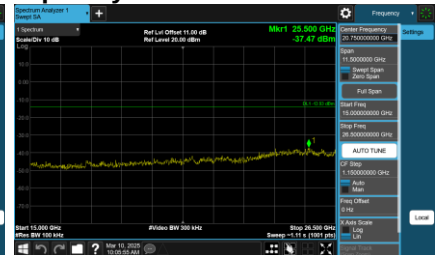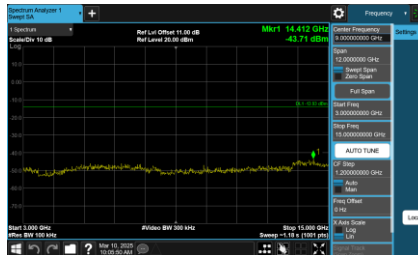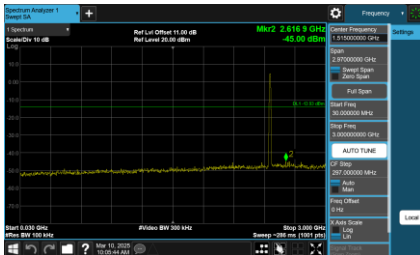

[illegible]

The figure displays three sequential screenshots of the Spectrum Analyzer interface, illustrating the process of tuning and measuring a signal. Each screenshot shows a frequency plot with a yellow trace representing the signal spectrum. The interface includes various controls and readouts:

- Frequency:** The top section shows the current frequency range and center frequency. For example, in the first screenshot, the frequency is 2.843 GHz with a level of -45.03 dBm.
- Settings:** The right side of the interface contains settings for the analyzer, including Span, Sweep, and Auto Tune options.
- Readouts:** The bottom section displays key parameters such as Start Freq, Stop Freq, Span, and the current signal level (e.g., -45.03 dBm).
- Auto Tune:** The 'AUTO TUNE' button is visible in the bottom right corner of each screenshot, indicating the automatic tuning process.

The three screenshots show the analyzer at different frequency points: 2.843 GHz, 14.424 GHz, and 25.069 GHz. The signal level remains relatively constant across the different frequencies, around -45 dBm.

The first screenshot shows a spectrum analyzer with a frequency range from 15.000000 GHz to 15.000000 GHz. The signal level is 45.29 dBm. The second screenshot shows a frequency range from 15.000000 GHz to 15.000000 GHz. The signal level is 44.39 dBm. The third screenshot shows a frequency range from 15.000000 GHz to 15.000000 GHz. The signal level is 46.57 dBm.

Test Mode TX N(HT20) Mode_Ant. 1




Bandedge-CH01





Bandedge-CH11





CH01 – 10th Harmonic of the fundamental frequency

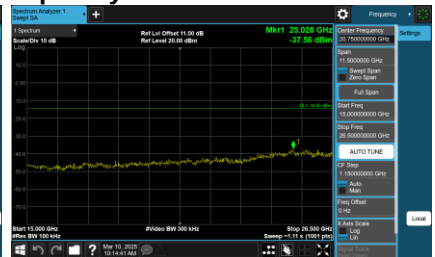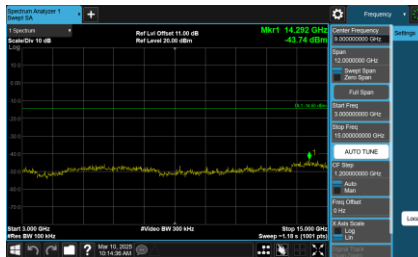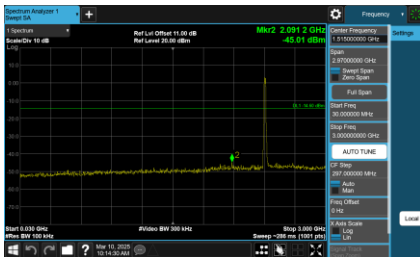

CH06 – 10th Harmonic of the fundamental frequency

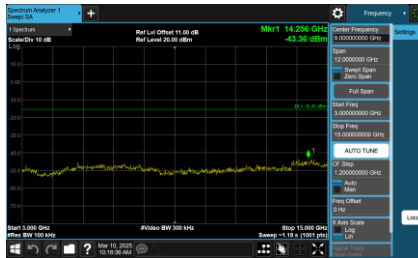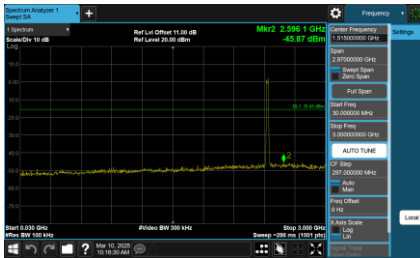

CH11 – 10th Harmonic of the fundamental frequency

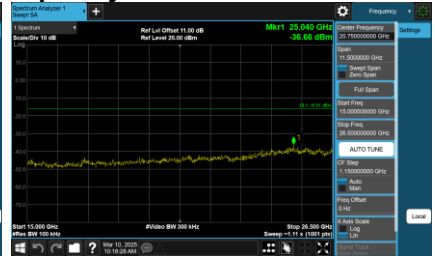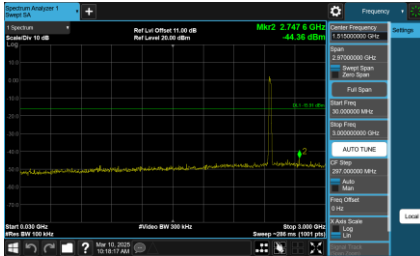

Test Mode TX N(HT40) Mode_Ant. 1




Bandedge-CH03






Bandedge-CH09






CH03 – 10th Harmonic of the fundamental frequency

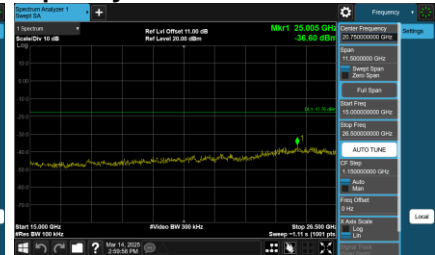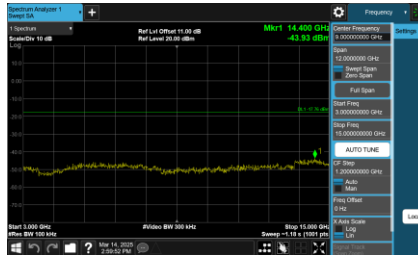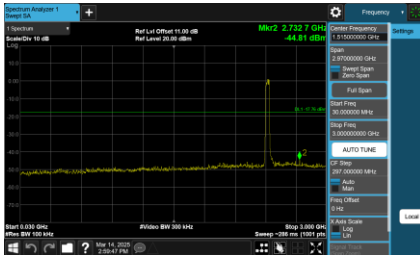

CH06 – 10th Harmonic of the fundamental frequency

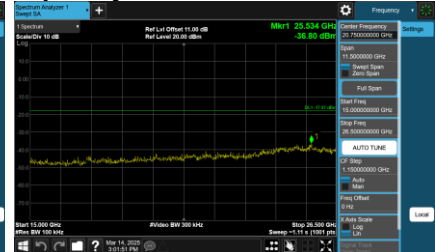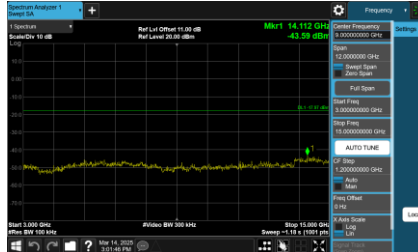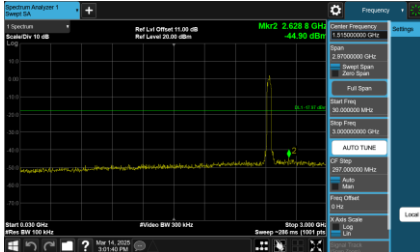

CH09 – 10th Harmonic of the fundamental frequency

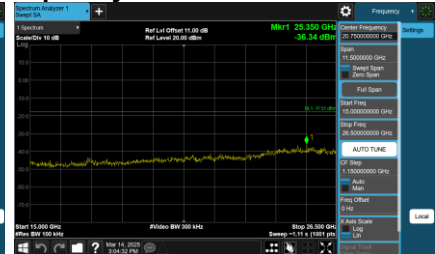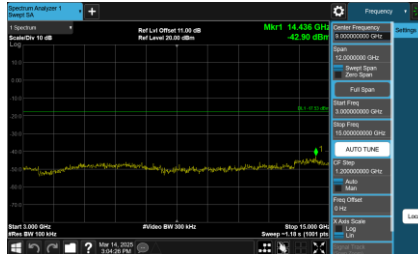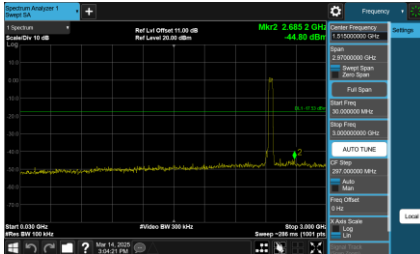


APPENDIX G - POWER SPECTRAL DENSITY

Test Mode	TX B Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-11.94	8.00	Complies
06	2437	-11.52	8.00	Complies
11	2462	-12.23	8.00	Complies

CH01

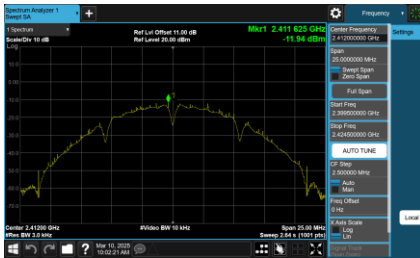

CH06




CH11




Test Mode	TX G Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-12.19	8.00	Complies
06	2437	-12.20	8.00	Complies
11	2462	-12.46	8.00	Complies


CH01

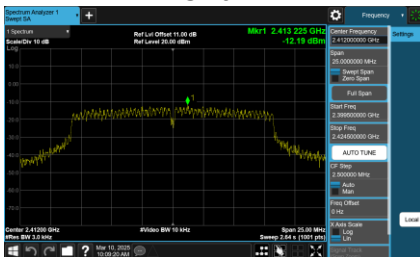

CH06

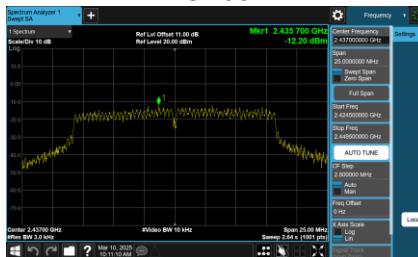


CH11

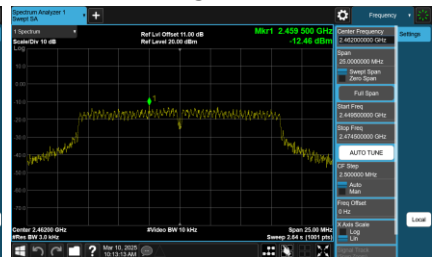


Test Mode	TX N(HT20) Mode_Ant. 1
-----------	------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-12.10	8.00	Complies
06	2437	-12.36	8.00	Complies
11	2462	-12.71	8.00	Complies

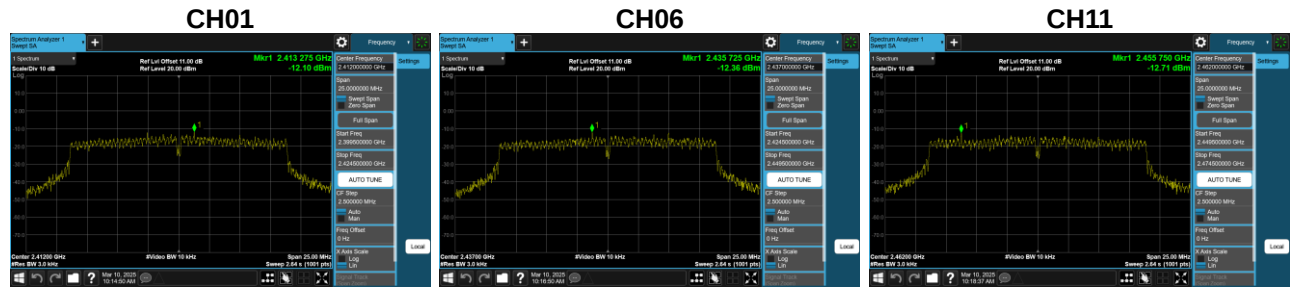

Test Mode	TX N(HT40) Mode_Ant. 1
-----------	------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-14.54	8.00	Complies
06	2437	-13.65	8.00	Complies
09	2452	-14.71	8.00	Complies

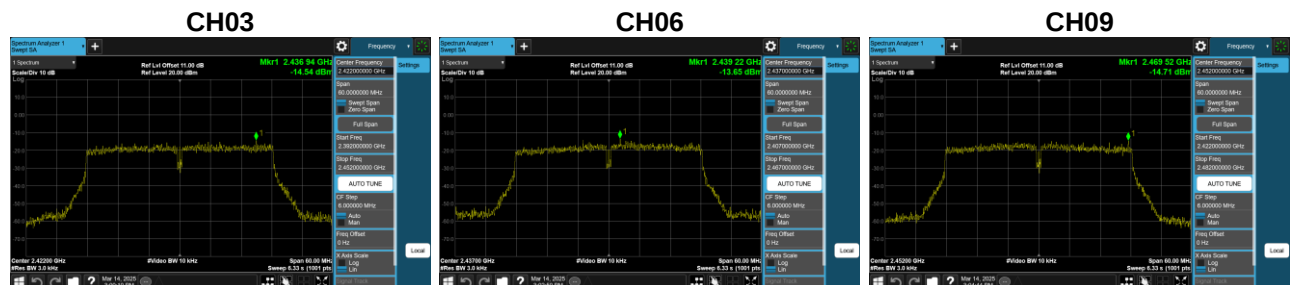

End of Test Report