

User Manual

Model Name: Tiké
Brand Name: Xeuss
FCC ID: Y2X-TIKE

Legal Notices

- Without the prior written permission; in any form is strictly prohibited to copy, transfer, distribution and storage of the user manual for any of the content.
- Spirit of continuous improvement, sustainable development principles, the Company reserves the right to notice, described in this manual for any product right to make changes and improvements.
- No matter the circumstances, the Company shall not for any loss of data or income or any special events, accidents caused directly or indirectly responsible for any losses.
- The contents of this manual provided as is. Unless the law otherwise provides, not its accuracy, reliability or content of any kind, express or implied, including but not limited to a particular purpose, timeliness and usefulness of the guarantee.
- The Company reserves the right to notice, at any time amend or revoke the power of the user manual. All warranty consulting, product features and specifications are subject to change without notice.
- As the software version of the update, apply to different networks or using different settings, the manual cell phone screen display may be different with your phone.

Product Specifications

Processor	ARM9 (156MHZ)
memory	Nor Flash:128M/PSRAM:32M
Support band	GSM1900MHZ、850MHZ
Main screen of information	2.0" QCIF 176*220
Battery Configuration	850mA/H
mode	Tike
mace	internal
Memory Card	Support 4G T-Flash up
Bluetooth chip	internal
Headphone / data line interface	5 PIN
Mode of operation	Standard keyboard
Address Book	<ul style="list-style-type: none"> ✧ 1200 records high-capacity storage ✧ Alphabetical Quick Search ✧ groups and blacklist
Note	<ul style="list-style-type: none"> ✧ Short Message ✧ No message content extraction
Multimedia	<ul style="list-style-type: none"> ✧ MP3/WMA/AAC/AAC + and other audio formats ✧ 3GP/RMVB and other video formats ✧ FM radio ✧ recorder function ✧ video camera and audio functions ✧ Electronic Album
Game	<ul style="list-style-type: none"> ✧ Java ✧ built-in fruit bowl games and e-books
The other can	Calendar, alarm clock, calculator, stopwatch, countdown timer, world clock, quick list

目录

1.	Security and Performance	5
2.	Getting Started.....	8
2.1.	Battery	8
2.1.1.	Battery removal and installation	8
2.1.2.	Battery charge	8
2.1.3.	Battery	8
2.1.4.	Power of direction	8
2.2.	Connect to the network	8
2.2.1.	SIM	8
2.2.2.	SIM insertion.....	9
2.2.3.	SIM card to lock.....	9
2.2.4.	Connected to the network.....	9
2.2.5.	Standby screen and the content.....	9
2.2.6.	Button.....	11
2.3.	Input	12
3.	Make and receive calls	12
3.1.	The phone on / off	12
3.2.	Call	12
3.2.1.	Direct Dial	12
3.2.2.	Call from the phone book.....	13
3.2.3.	Phone not connected.....	13
3.3.	Answer the call	13
3.4.	Call the process	13
3.5.	Emergency calls	14
4.	Main Menu	14
5.	Telephone Directory	14
5.1.	SIM card and phone phonebook	14
5.2.	Contact List	14
5.3.	Contact	14
5.4.	Groups and black	15
6.	Information Center	15
6.1.	Written information	15
6.1.1.	SMS.....	15
6.1.2.	MMS.....	15
6.2.	Inbox	15
6.3.	Drafts	16
6.4.	Sent Box	16
6.5.	Outbox	16
6.6.	Template	16
6.7.	SIM card information	16
6.8.	Voice mail.....	16
6.9.	Cell Broadcast	16
6.10.	Setting.....	16
6.11.	Memory Status.....	16
7.	Call Center.....	16
8.	SetTING.....	17
8.1.	General Settings	17
8.1.1.	Personalization settings.....	17
8.1.1.1.	Display Settings	17
8.1.1.2.	Standby Interface	17
8.1.1.3.	Breathing light.....	17
8.1.1.4.	Ring setting	17
8.1.1.5.	Date / Time.....	17
8.1.1.6.	Profile	17
8.1.1.7.	Languages.....	17
8.1.1.8.	Automatic Switcher.....	17
8.1.1.9.	Mobile	18
8.1.1.10.	Security Settings.....	18
8.1.1.11.	PIN code settings.....	18
8.1.1.12.	Handset lock	18
8.1.1.13.	SIM card lock	18

8.1.1.14. Automatic keyguard	18
8.1.1.15. To restore factory settings	18
8.1.1.16. Handset settings	18
8.1.1.17. Call settings	18
8.1.1.18. Call waiting	18
8.1.1.19. Send the machine number	18
8.1.1.20. Any key answer	18
8.1.1.21. Call time reminder	18
8.1.1.22. Automatic redial	18
8.1.1.23. Automatic answer	18
8.1.1.24. Answer to remind	18
8.1.1.25. Cost settings	18
8.1.1.26. Call Group	18
8.1.1.27. Call Transfer	19
8.1.1.28. Call barring	19
8.1.1.29. Network Settings	19
8.1.1.30. Standby mode	19
8.1.2. Default SIM card	19
8.1.3. Speed Dial	19
8.2. Connection Settings	19
9. Multimedia	19
9.1. Select Camera	19
9.2. Camera	19
9.3. Recorders	20
9.4. Music player	20
9.5. Video player	21
9.6. Electronic Album	21
9.7. Radio	22
9.8. Recorders	22
9.9. Analog TV	22

10. Document Management	22
11. Fun & Games	23
11.1. EBook	23
11.2. MSN	23
12. Network Services	23
12.1. WAP browser	23
12.2. Bluetooth	23
12.3. Operator services	23
13. Toolbox	23
13.1. Calendar	23
13.2. Alarm Clock	24
13.3. Calculator	24
13.4. Stopwatch	24
13.5. World Clock	24
13.6. Countdown	24
13.7. Quick list	24
14. USB mode	24
15. Appendix	25
15.1. Frequently Asked Questions	25
15.2. Display information	25
15.3. Accessories	25
Note :	25
15.4. Maintenance Guide	26

Preface

Dear User:

Hello, Thank you for choosing our TIKE mobile phone.

This manual details the TIKE mobile phone varied functions. In addition to basic call functionality, a variety of network services and game entertainment, peaceful, through benign TIKE mobile phone interface, have a pleasant experience.

In addition, TIKE mobile phone with a 2.5G GSM / GPRS 850/1900 dual-band dual-card support network, you can easily free to use your own door number two, and can enjoy excellent call quality anytime, anywhere and swim free wireless high speed Internet access.

TIKE mobile phone package box contains a rechargeable battery, quick charger and other special wiring.

Attention:

- Use without the approval of the relevant plant parts, may cause danger, damage caused will not be included in the warranty.
- TIKE mobile phone has been tested by the State Ministry of Information Industry of the network, the indicators have reached the national standard, and awarded the State Ministry of Information Industry issued the "Network Access License", if the content described in this manual or picture with your mobile phone does not match, please show your mobile phone prevail, the company may amend the technical rules without prior notice.
- The Company reserves the right technical product specifications and the right to amend this specification without prior notice.

Accessibility statement:

In the manual shows a different layout style of the different details of operation as follows:

Operating	Description	Example
Display	Normal character	0-9

1. SECURITY AND PERFORMANCE

Emergency Services

In any country, if there is a need to allocate an emergency call; direct dial 112 (or other emergency services calls).

NOTE: Due to the special nature of the cellular network, emergency calls can not guarantee success.

Personal

- Including mobile phones, including the use of the RF device may be bad shielding properties of some disruption to medical devices, such as hearing aids and heart pacemakers, so before using the phone, should medical equipment manufacturer or your doctor consultation.
- For users with heart disease, paying particular attention to incoming ring volume and vibrating alert settings.
- In the oil warehouses, chemical plants and other explosive gases, or explosive production sites, should pay close attention to restrictions on the use of RF equipment.
- Your mobile phone is in standby, will send electromagnetic signal, if it needs, you should turn off the phone.
- Should pay attention to traffic safety, do not use mobile phones while driving, such as it is necessary, and park your car first.
- If your phone is lost or stolen, please immediately notify the network operator to disable the SIM card, which will allow you to take phone calls from others, the economic losses.
- When you network operator or its outlet, they need to know your phone's IMEI number, it is printed on the label on the back of the phone (remove the battery can be found) (or dial "* # 06 #" see IMEI number.), please copy down the numbers, and take good care of it for future needs.
- To enable your phone is not being misused, take preventive measures, such as: set up or a mobile phone SIM card PIN, personal security code, and changes in the others know.

- Please do not directly remove the battery in standby mode; this will result in the loss of user data.
- Leave your car, please do not put cell phones on the easy to be seen, the best portable or locked in the trunk.
- Do not let children play with cell phone, charger or battery.

Mobile telephone

Phone contains sophisticated electronic circuits, magnets and battery systems, should be handled with care, in particular the following points need attention:

- Your mobile phone will generate electromagnetic fields; do not put in some categories such as computer disk near the magnetic storage medium.
- Television, telephone, radio and personal calculators and other electrical equipment near the mobile phone may cause interference, thus affecting the phone's performance.
- Any time, do not let the phone and its accessories come into contact with liquid or in a humid environment.
- Do not phone the temperature is too high or too low on the environment.
- Do not use mobile phones on the flame, lit cigarette next.
- Do not graffiti on the phone.
- Do not let the phone drop, or on the phone beat any violent acts.
- Do not use mobile phones and computer disks, credit cards, travel cards or other magnetic objects together, or stored within the disk or credit card information, may be affected by the phone.
- Do not place the phone or the battery temperature may exceed 60 °C in areas such as car dashboard, window sill or in direct sunlight after the other.
- Do not try to open the device or any other accessories.
- Can only use the slightly damp or antistatic cloth cell phone, do not use dry or with a cell phone static cloth.
- Do not use chemicals or cleaning agents containing grinding

elements, or may damage the chassis.

- Handset may be used in normal heating; mobile phones will be hot during charging.
- Do not let the phone a long time not to install the battery or the battery is empty, otherwise some data may be lost.
- Phones contain some of the metal material may cause you to allergic phenomena, depending on your constitution and health status.
- Do not put the phone back pocket pants or skirt, to prevent damage to the phone when sitting down. Also do not want cell phones on the bottom of the bag to prevent the phone by the impact or strong compression.
- If the vibration function turned on, the phone away from heat sources (such as the heater), and to avoid cell phones because of vibration and drop from your desktop.
- Use only the stylus for this model.
- Using other stylus may violate the phone warranty, and may damage the touch screen.

Battery

- Do not make the battery short circuit, which will damage the battery, heat, and may cause a fire.
- Discard the battery in a fire so as not to cause an explosion, used batteries should be returned to the supplier, or on the designated collection points, do not put household garbage.
- Do not use metal objects (such as coins or key ring) contact with the battery of endpoints that make them short.
- Do not remove the phone battery under the boot.
- Do not phone battery in its mouth, because after swallowed the electrolyte may cause poisoning.
- Built a mobile phone battery can only be replaced by a professional maintenance engineer. If you use the wrong type of battery, it may cause an explosion. Be sure to deal with according to the

manufacturer's instructions to the battery used.

- Handset manufacturers to use any non-specified battery charger will have a potential risk; the resulting damage is not warranty on the phone list.
- If the battery is damaged, avoid contact with the inside, and if they come into contact with skin, wash with plenty of clean water, if necessary, should seek medical help.

On the road

- Must always be safety control car, please focus on driving on.
- Please abide by local traffic safety laws and regulations in all its provisions.
- In the send, receive calls; you should pay close attention to the local mobile phone use on the legal system, and in the use of attention.
- According to the requirements of driving conditions, then please stop car make and receive calls.
- Except in case of emergency, ban off the highway side of the road office to answer or make calls.
- vehicle electronic systems, such as: locking brake, fixed degree of control and fuel injection system, generally free of RF effects, such equipment manufacturers tell you whether these devices have good shielding. If you suspect that the fault car radio lead, please contact the car dealer, without qualified personnel inspect the installation before please do not use the phone in the car.
- Airbags inflate with a strong external force, do not secure over the air bag or air bag to hit the region after the commencement of the installation or placement of wireless communications equipment, if the vehicle wireless communication device is not installed correctly, if the airbag inflated will result in serious injury.
- When refueling, turn off your mobile phone, the same situation applies to prohibit the use of two-way wireless devices place. Please do not be flammable, explosive materials and mobile phones

together with the handling or the internal spark may cause fire.

The plane

- In the vicinity of aircraft or aircraft, turn off the phone and remove the battery. The use of mobile phones in aircraft is illegal; it could have dangerous aircraft operations may also undermine the mobile phone network. Offenders may be suspended or canceled phone service, even prosecution, or by double punishment.
- In emergency situations, consent should be in accordance with the safety requirements before allowing the crew to use the phone.

Other manufacturer's equipment

- Unauthorized use of other manufacturers of equipment, cables or accessories may cause the phone warranty, but will also affect the normal use of mobile phones. Be sure to use rationing cable.

Maintenance service

- Phone, battery and charger there are no user serviceable parts. Proposed to your mobile phone to the designated repair facility for service. When you think you need repair service, contact the network service provider for details.

Non-ionizing radiation

- Radio equipment should be no radiation through cable (such as coaxial cable) and the antenna connected. Antenna should not be installed in areas close to the body, unless there is between the metal shields, such as metal roofs. Use only specially designed antenna-based mobile phone. Use of unauthorized antennas, modifications or additions unauthorized attachments that may damage the phone or the breach, or cause performance degradation caused by the radiation level does not meet the relevant standards.

The effective use

- In order to minimize power consumption for optimal performance, please note the following provisions: Do not hand cover the phone antenna site, or it may affect call quality, and cause the phone to the normal level of output power beyond the work, shorten the Battery talk time and standby time.

RF energy

- Your cell phone is a low-power radio transmitter and receiver. Once the boot, it will intermittently receive and transmit radio signals. Network system will control the phone's transmitting power.

2. GETTING STARTED

2.1. Battery

Set box with battery, battery not charging when the purchase, but there may be support boot.

The new battery is completely used up, please boot state without charge at least 12 hours, so after three consecutive charge and discharge, the battery will achieve the best use of the state.

2.1.1. Battery removal and installation

Demolition of the battery set the back of the phone facing you, press and hold the battery cover the top, sliding down the back cover, you can remove the battery located at the bottom to pull the hand out flip, and you can remove the battery.

Installation, insert the battery the edge of the corresponding slot, slot, press the battery down, then cover the back cover, you can install a good battery. Please be sure that the phone battery before booting.

2.1.2. Battery charge

Please phone charger connector into the charger jack, and charger plugged in, it will start charging.

Flashing battery symbol that is charging, when charging symbol stationary, that is fully charged.

During charging, batteries, cell phone and charger become hot, this is normal, charging is completed, please turn the power off, unplug the charger.

Warning:

- provides charging temperature range 0 °C -50 °C, over this range, please do not use the charging equipment.
- Be sure to use the charger provided by the supplier, the use of an unapproved charger may be dangerous and breach of the phone recognition and warranty.

2.1.3. Battery

Providing handset manufacturer's standby time and talk time is an ideal work environment based on the value, the actual use state, battery life may be with the network conditions, work environment and the use of different methods vary.

Dispose of batteries according to local regulations (erg recycling), Do not dispose as household waste.

2.1.4. Power of direction

Cell phone turned on, battery power level displayed in the upper right corner of the screen

2.2. Connect to the network

2.2.1. SIM

Your network operator for your mobile phone to provide a plug-in user identification card, which is SIM card .

SIM card is your key to enter the digital GSM network, access to the network start communications; you must first insert a valid SIM phone card.

And a network connection of all relevant information, are recorded in the SIM card in any future name, phone numbers and information, will also be stored in SIM card.

SIM cards can be removed from your mobile phone; a GSM mobile phone into any use, the majority of new mobile phone SIM card will be automatically read the data.

In order to prevent loss and damage card information, should avoid touching the metal surface area, and away from the SIM card on the electric, magnetic place.

Once the SIM card is damaged, you will not have access to GSM networks.

Warning:

- Remove the SIM card to phone them before shutdown, there is absolutely prohibited in the case of external power supply connected to insert or remove a SIM card, or SIM card will likely be damaged.

2.2.2. SIM insertion

SIM card usually on a special card, in the assembly, you must carefully remove it, then switch off the power, remove the battery and other external power supply.

The SIM card is inserted in the SIM card slot, SIM card slot as lacking in position should be the same direction around the corner missing. Push the SIM card, SIM card into the slot to determine, and the battery, cover the back cover to complete the SIM card inserted.

Similarly, if you want to remove the SIM card, also turn off the cell phone power, remove the battery and the other external power connector, then remove the SIM card.

2.2.3. SIM card to lock

In order to prevent illegal use, SIM cards with personal identification number, PIN code is encrypted and protected.

Elected to use this feature, you must enter the PIN every time boot code, so you can unlock the SIM, and then send or receive calls.

Users can also lift the SIM card protection; in this case, SIM card will not be able to prevent the illegal use.

SIM card lock on the boot mode, please refer to the relevant sections of this manual.

Unlock method:

- Long press the power key to open the phone.
- Enter the PIN code, click confirm, for example: if the PIN is set to 1234, then enter as follows: 1234 and click confirm.

If three consecutive incorrect, your SIM card will be locked, the phone will be asked PUK code.

Note:

- Your network operator SIM card for your Chamber of Commerce to set a standard PIN number, usually 4 to 8 digits, you should change as soon as possible to your personal password.
- PUK code 10 times the wrong row, SIM card will be invalid

2.2.4. Connected to the network

SIM card decryption is successful, the phone will automatically search your network or the registration of other available local network, once contacted, the network operator's network name, will appear in the top of the screen.

Your phone is in a standby status; you can send or receive calls.

2.2.5. Standby screen and the content

The machine provides a standard standby interface, you can display the instructions and symbols to obtain the information you need.

Standby interface standard provides a variety of fast control; you can open the touch drag to a number of functions. In addition, the machine idle screen also provides a lovely pet control, in the call and receives information; it is interesting and vivid way to show expression.



状态栏图标	说明

Button

Phone keypad as shown in (mainly in kind of specific keys)



TV key: standby status, press TV button to enter the analog television interface;

On / off button: On / off, click this button at any interface out to the idle screen;

The arrow keys: the default music player functionality into the interface;

Under the direction of key: the default interface to enter the alarm settings;

Left arrow key: the default settings into the ring layout;

Right arrow key: the default settings into the situation model interface;

Dialing keys: used to answer the phone and call, and you can view the call records.

Note:

- The manual called this action by pressing a button, the button is pressed immediately after the release; long press of a button, the button is pressed and hold at least 1 second and release.

2.3. Input

The mobile phones with built-in input methods, so you can lower the number of keys, find and enter the relevant text:

3. MAKE AND RECEIVE CALLS

Phone set is complete, you can make and receive calls, and this section will give you all the basic information needed.

Note:

- When using the headset, tap plug light pull, so as not to damage the headphone jack.

3.1. The phone on / off

Phone Power

You can press and switch machine key to open the phone. If asked

to enter PIN code, see the front of the section described.

Phone off

In standby mode press and switch machine key to power off the phone.

3.2. Call

When the network operator's text appears in the display, or go into standby screen, then you can make or receive calls. If you insert the two SIM cards, two operators of the text, will appear in the display.

Display the upper left corner of the image were marked to the current dual-card network signal strength (at least when cells expressed the strongest network signal).

The impact of voice quality by the relatively large obstacles, so the movement in a small area can effectively improve the signal strength.

Call from the idle screen in two ways: direct dial, phone book dialing.

3.2.1. Direct Dial

Standby interface press the right software to access the phonebook or press any number key to enter dial-up interface.

Domestic telephone calls

Enter the phone number using the keyboard (if it is a domestic long distance, please add area code), then click card 1 or card 2 to start the call.

Note:

- When using a single card standby mode, click the card 1 and card 2 to correspond to the current dial-up card

- When using dual-card standby mode, click the card 1 and card 2, corresponding to card 1 and card 2 dial
- You can also achieve the appropriate action by a physical keyboard
Dial-up when the display shows the name or phone number, call is connected after the show call time, the other party's phone number or name.
Enter the phone number; you can click the option to choose a variety of operating functions: dial-up, save and send functions.

International calls

To make international calls, you can simply use a long point * Enter symbol "+", then enter your country code to call and complete phone number.

Example: To dial the phone in France, can be a long point *, until the sign "+" appears, then type "33" (the French code), and enter the complete phone number.

3. 2. 2. Call from the phone book

In the main menu to access the address book. Retrieved through the alphabet, after the contacts you need to allocate numbers.

3. 2. 3. Phone not connected

If you set the auto redial, the phone will automatically re-dial the phone number you just dialed.

3. 3. Answer the call

When a new call, the phone will display the new caller's phone number or name, and according to your settings for vibration / ring / vibration plus ringbones, quiet way to inform you of new calls.

When a call comes in, you can achieve through the buttons or touch operation to answer or reject calls.

If you are on a call, phone short tone will prompt you to new calls.

At this point you can touch operation buttons or the realization of answer or reject. If you choose to answer the new call is answered the telephone call will be maintained into the state.

3. 4. Call the process

During a call, you can achieve through the Options menu the following functions: hands-free, mute, hold, end the call, volume, dual tone multi-frequency, sound recording, contacts, and information.

Note: During the call on the SIM card by calling the different operation will be different, the following menu will change.

Hands-free: hands-free calls;

Mute: Turn off the cell phone microphone; the other party will not be able to hear your voice;

To keep: to keep the current call, then call the two sides could not hear each other's voices. Phone to keep in the Options menu you can answer or end calls to maintain;

End call: end the current call.

Volume: adjust the volume of the speaker or headphones

DTMF: You can determine the key tone on / off.

Recording: The recording is saved conversations.

Address: enter the phone book window, and the corresponding operation, facilitate the process of inquiries call phone number.

Information: Enter the short message editor window, and complete the corresponding operation.

You can also dial-up during a call into the interface or address book, open a new call through telephone.

Note:

- Dual cards standby mode, if a card is in the process of the call, then another card is in a non-network status

3. 5. Emergency calls

In any country using digital GSM network, if you are in network coverage, you should be able to call emergency services.

If you are in network coverage, even without the SIM card can also carry out an emergency call.

4. MAIN MENU

In standby mode, press the OK button or press the left software to enter the main menu. You can enter through the main menu features phone applications.

5. TELEPHONE DIRECTORY

This chapter details the various features of Address Book, users can Pinyin, Family Names, or letters to the corresponding search form to find contacts quickly.

5. 1. SIM card and phone phonebook

In the phone's address book, stored in the SIM card and phone contacts, will be displayed in different list.

Stored in SIM card contacts, can only store a phone number and name of the future, replace your phone, these contact data will be replaced with the SIM card, so you can also save the new contact phone personal data.

Stored in the SIM card number of the contact group, will depend on the different restrictions on each SIM card.

Stored in the phone contacts, you can store names, phone, home, office, other, groups, photos, ring tones, company, department, title, address, e-mail, web site, Notepad, these records will be replaced in your phone, will not be able to follow the replacement SIM card directly

save to a new phone.

5. 2. Contact List

Contact List by Chinese Pinyin names and sort alphabetical order, list all Address Book contacts. Options menu you can achieve the **following**: View, dial-up, IP call, send, new, delete, mark, copy to the SIM card or mobile phone, join the group, contacts, fixed dialing, memory status.

View: See contact details of the contact.

Dial: Dial the current contact's phone.

IP calls: dial IP number by the current contact's phone call.

Send: to send SMS or MMS the current contact

New: New Contact

Delete: Delete the current contact

Tags: enter the tag interface, select the tag contacts.

Copy to SIM card or phone: will be saved in SIM card or phone contacts to your phone or SIM card.

Note:

- If stored in the phone contact with a variety of data, copied to the SIM card, it will save all the fields are divided into many.
- Dual cards standby mode, the Copy function is only valid for the default card.

Joined the group: the current contact group is set to add to or blacklist.

(**Note**: only the phone contacts in order to join the group)

Contact: Export and Import to achieve communication

Memory status: View storage status communications path.

5. 3. Contact

Into contact through the contact list interface, you can view contact details to the contact. Options menu you can achieve the **following**: dial-up, IP call, send, edit, delete, set the phone book

that, to set ringbones, join the group

Edit: Edit contact's contact details.

Set the phone book that: to set the phone book that contact.

Set ringbones: ringbones to contacts settings.

5. 4. Groups and black

The phone provides you with a custom address book groups feature. You can edit your contact group classification criteria. At the same time, for you do not want contact with the contacts, you can edit the blacklist approach rejected all his calls and letters.

6. INFORMATION CENTER

This chapter will introduce the GSM network to provide information services; some services may not be local or roaming in network support.

6. 1. Written information

This section will show you how to use the phone to send SMS and MMS.

6. 1. 1. SMS

Enter text editing interface, you can enter your desired text using the keyboard characters and punctuation marks.

When you finish editing the text, you can achieve the following **menu options:** Add the recipient, as a draft, insertion into MMS, sending options, input method.

Add To: Add the recipient into the interface.

Save as draft: this short message stored in the Drafts.

Insert: You can insert pictures in the message content, sounds, videos, templates, contacts, calendar.

Converted into MMS: SMS into MMS format this .

Send options: to enter SMS settings page, the service center number, send mode, valid, messaging formats, send the report directly set back

Input Method: You can insert symbols, copy or paste the text content, switch input methods, switching languages

6. 1. 2. MMS

Access to multimedia editing interface, you can enter text, insert images, sound and video editing MMS can achieve the Cc and Bcc MMS functionality.

When you edit the MMS, you can achieve the following options menu: Send, Add recipient, Insert, insert the page, preview, convert text, save as a draft, set.

Send: send text messages. (Add a recipient without the recipient will enter interface)

Add To: Add the recipient into the interface.

Insert: You may insert in the message content templates, contacts, calendar, pictures, sound and video.

Insert the page: You can choose to insert before or after the current page the new page.

Preview: Preview the current editor of the MMS.

Converted into SMS: this message into SMS format .

Save as draft: this message stored in Drafts.

Page Set: Set MMS time on the size of the text location and photos.

6. 2. Inbox

Inbox way to list out all you receive SMS and MMS. Options menu you can achieve the following: open, write SMS / MMS, reply SMS / MMS, delete, copy to phone or SIM card, tag, details.

Select Open, will open the message. Options menu you can achieve the following: SMS or MMS reply, forward, delete, call sender, copied to the SIM card details.

Marker can select the information or all information marked, in order to achieve the removal of all the tag information.

6.3. Drafts

Drafts way to list out the success of your store or send text messages, you can achieve the following options menu: open, write the information, delete, and copy to the SIM card, tag, details.

Select Open, will enter the text editing interface.

6.4. Sent Box

Sent me a way to list out all the messages you are sent, through the Options menu, you can achieve the following operations: read, delete, delete all, move, mark, details.

Choose to read, to open messages. Options menu you can achieve the following: forward, delete, details.

6.5. Outbox

Outbox way to list out all the information you send, you can achieve the following options menu: open, write the information, delete, copy to the SIM card, tag, details.

Select Open, will open the message. Options menu you can achieve the following: forward, delete, call recipient, IP call, copied to the SIM card details.

6.6. Template

This feature you can customize your frequently used text templates.

6.7. SIM card information

You can view the SIM card through this interface stored in the SMS.

6.8. Voice mail

By calling voice mail to listen to voice mail . First time, you will be asked to enter your voice mailbox number.

6.9. Cell Broadcast

View of the cell broadcast.

6.10. Setting

You will be able to set this for text messaging to do the adjustment before sending text messages, please confirm your short message center number is a set.

Set the options available are: SMS, MMS, cell broadcast, voice mail.

6.11. Memory Status

Storage status interface SIM card and you are prompted to phone text messages stored state and the remaining memory space.

7. CALL CENTER

Record of the call log of all your recent calls, missed calls, received calls and dialed calls. Options menu you can perform the following operations: View, dial-up, send, save, delete, delete all, call timers, call cost.

View: to view the details of call records.

Dial: dial the currently selected phone number.

Send: to the current number to send SMS or MMS.

Save: Save the currently selected phone number.

Delete: Delete the currently selected item.

Delete all: delete all, the card 1 or card 2 for all projects.

Talk time: you can view your last set aside the time a phone call, outgoing calls, received calls total, they can reset the timer (must enter phone password).

Call costs: According to the calculation of call time call charges.

Note:

- phone password settings in other sections

8. SETTING

From the main menu to access the settings menu, here you can set the general settings, phone settings, connection settings.

Note:

- If the phone only to insert a SIM card, the system automatically hide the standby mode and the default SIM card

8.1. General Settings

8.1.1. Personalization settings

Including the display, the idle screen, breathing light, tone settings.

8.1.1.1. Display Settings

Backlight: this feature you can set the backlight brightness and backlight time

8.1.1.2. Standby Interface

You can set this feature standby picture, operators name and shortcut function keys.

8.1.1.3. Breathing light

Short interest in the state, call state, charge state, the standby-type state, the keyboard's appeal to the same light as the flashing .

SMS breathing light: In the short information state, the keyboard lights flash;

Call breathing light: calls when the keyboard lights flash;

Charging breathing light: the keyboard in the charging light flashes;

Standby breathing light: the phone keypad light flashing under leisure.

8.1.1.4. Ring setting

Here you can adjust all the settings on the ring, adjust the items available for vibration, sound, ringbones, startup tone, off ringbones, information, calendar, alarm clock, missed the event reminder tone.

8.1.1.5. Date / Time

You can use this setting to your wants and hopes for the date, time, time zone, date format, time format, daylight saving time.

8.1.1.6. Profile

Phone built-in standards, meeting, outdoor, quiet, self-definition, six headset profiles . You can choose to start any kind of custom functionality can also be a model for each of the parameters reset, restore function through the initial set.

8.1.1.7. Languages

You can set the language settings, write the language, the default input method, keyboard.

The phone available in multiple languages including English mode, you can button to select the language you want to use.

The phone can be written for different languages language settings. When the language is English, you can choose to set the default Input Method: ABC, abc.

8.1.1.8. Automatic Switcher

You can set the automatic open, the shutdown time and status.

Note: The startup and shutdown time, indirectly, more than 5 minutes.

8.1.1.9. Mobile

You can check this ID on your phone, memory information, and software version.

8.1.1.10. Security Settings

8.1.1.11. PIN code settings

You can start this PIN lock mechanism can also modify the PIN1 and PIN2 password; you must first enter the network service provider's default PIN code before they can continue to operate this feature.

8.1.1.12. Handset lock

Here you can activate the phone lock and modify the phone password, you must first enter the mobile phone factory default password, it can continue to operate this feature.

Factory default password is: 0000.

8.1.1.13. SIM card lock

Here you can view the SIM card lock, and change the password

8.1.1.14. Automatic keyguard

You can use manual configuration option, to immediately enter the unlocked mode for mobile phones, you can also choose to automatically lock, so that after the mobile phone into a standby screen without the use of time, automatically locking the screen and keyboard.

Unlock the keypad lock by pressing the OK + # .

8.1.1.15. To restore factory settings

You can use this option to set the phone to restore to factory state, or only to restore the default settings, you must enter your phone password, before continuing movement. Phone default password is: 0000

Phone back factory state all data will be deleted.

8.1.1.16. Handset settings

You will be able to set the phone settings, call forwarding, call

barring, network settings, standby mode, the default SIM card and speed dial.

8.1.1.17. Call settings

You can choose to set the card 1 and card 2, call waiting, sending the machine numbers, any key answer, call time reminder, automatic redial, auto answer, answer the reminder, Cost settings, call group.

8.1.1.18. Call waiting

You can enable or disable call waiting, call waiting can also look at the current state. If the status is closed, when the phone is busy, if a third party into the phone, third party heard the busy tone.

8.1.1.19. Send the machine number

You can set it to open to send the machine number.

8.1.1.20. Any key answer

You can set whether to call this, press any key can be picked it up, or only use the call key.

8.1.1.21. Call time reminder

Here you can set different call time reminder.

8.1.1.22. Automatic redial

You can set whether this automatic redial, busy time when the outgoing call, the phone will automatically redial the decision based on this set or not.

8.1.1.23. Automatic answer

Here you can set the Auto Answer on or off.

8.1.1.24. Answer to remind

You can remind the person to answer this set is off, ring tones, vibration, screen flash.

8.1.1.25. Cost settings

You can engage in a monetary unit setting tariffs and quotas.

8.1.1.26. Call Group

You can call this set the group can view its status, group number, and call the switch outside the state.

8.1.1.27. Call Transfer

You can set, including all voice, data and fax calls transfer of different ways. Call transfer methods are: All transfer, busy time, when no one answered, no network or shutdown, the elimination of all transfers.

8.1.1.28. Call barring

You can set, including all voice, data; fax and SMS call restrictions in different ways. Call barring the way: all exhale, international outbound international calls only national, all calls, roaming calls are prohibited, to remove all restrictions, change password

8.1.1.29. Network Settings

You can set the priority for this network, operators and flight mode.

8.1.1.30. Standby mode

Dual-card mode: in dual standby;

Card 1 Model: Select SIM card 1 click "OK", only the primary card is in standby;

Card 2 mode: Select the SIM card 2, click "OK", only the second card in a standby state;

Flight Mode: This option is used to set the phone into the aircraft used by the state.

8.1.2. Default SIM card

You can set the default phone SIM card.

8.1.3. Speed Dial

You can set the speed dial feature number. When the set speed dials number, you dial-up interface using the number keys + dial key or long press the number key approach can achieve a speed dial.

8.2. Connection Settings

You can account for this set of data, WAP settings, MMS settings, java settings.

9. Multimedia

Enter through the main menu, multimedia menu; you will be able to achieve access to the following features: camera selection, camera, camera, music player, video player, e-albums, radios, tape recorders, analog TV.

9.1. Select Camera

Can choose to pre-and post-lens camera .

9.2. Camera

Before using the camera, make sure your memory card has been inserted, JPG format photos will be stored on your memory card.

Note:

- In the bad light and the camera preview image quality may result in a decline.

Into the camera feature, the camera preview screen will open, through the interface icons, you can view the status of various settings, press the OK button to take pictures.

You can also click the other icons to achieve a variety of different operations.



Open the Settings feature



Into the photo browsing interface



Switch to camera



return

Camera interface can be set to achieve the following functions: Photo size, picture quality, night, special effects, continuous shooting,

self-timer, white balance, to avoid flicker, sound, EV, flash.

Picture Size: calls Diazotize, standby picture, 320x240, 640x480, 800x600, 1024x768.

Photo quality: standard, high, low.

Night mode: open and close.

Effects: fuzzy, standard, monochrome, retro, negative, drawing, painting, relief, mosaic, serrated.

Continuous: none, 4, 6, 9.

Self-timer: off, 5 seconds, 10 seconds, 15 seconds.

White Balance: Auto, cloudy, daylight, fluorescent, white light.

To avoid flicker: 60 Hz, 50 Hz.

Audio: On, Off.

EV: -2, -1, 0, 1, 2





Flash: The camera, the phone comes with lights flashing; there on and off the two states.

9.3. Recorders

Before using the camera function, make sure your memory card has been inserted, 3GP format video will be stored on your memory card.

Into the camera function, the camera preview screen will open, through the interface icons, you can view the status of various settings, press the OK key to start the camera.

You can also key to achieve a variety of different operations.

	Open the Settings feature
	Access to video browsing interface
	Switch to camera
	return

Camera interface can be set to achieve the following functions: image size, picture quality, night, special effects, and white balance, to avoid flicker, sound, file size limit, video time limit, and EV value.

Image Size: CIF (352x288), QCIF (176x144).

Video Quality: High, low, standard.

Night mode: on, off.

Effects: blur, usually monochrome, sepia, negative, drawing, painting, mosaic, serrated.

White Balance: Auto, cloudy, daylight, fluorescent, white light.

To avoid flicker: 60 Hz, 50 Hz.

Sound: open and close.

File size limit: unlimited, MMS size

Camera Time Limit: unlimited, 15 seconds, 30 seconds, 60 seconds

EV: -2, -1, 0, 1, 2

When the video was recorded will be automatically saved, you can preview or delete the appropriate action to achieve.

9.4. Music player

Into the music player you first see the music player list interface, you can use the "all music" See all cell phone music format documents. You can also customize new and editing your personal freedom play list.

Music Play list interface, you can achieve the following options menu: View, New Play list, rename, delete, repeat, shuffle, equalizer, 3D surround, lyrics display.

Music play list interface to select a song into the music player interface, through this interface you can view that album, song title, artist, play time, songs in a play list in the order and other information:











Suspended (you can achieve under the direction key)

Play (you can achieve on the arrow keys)

The former one (you can left direction key operation)

Next song (you can right-arrow key operation)

Increase the volume (you can press the number 2 key operation)

	Decrease the volume (you can press the number 8 key operation)
	Cycle adjustment button
	Single loop
	All loop
	Closed loop
	3D Play
	Random Play
	Show lyrics

You can also use the Options menu to achieve the following: play / pause, stop, repeat, shuffle, equalizer, 3D surround, display lyrics, song information and details.

9. 5. Video player

Into the video player you first see a list of phone video files, you can choose the video into the player interface:



You can also use the Options menu to achieve the following: stop / play, full screen, send, delete, details.

9. 6. Electronic Album

Into electronic albums, photographs taken by the camera to show thumbnails arranged. Options menu you can achieve the following: View, set to, send, rename, delete, slide shows, details.

View: View image.

Set: set to standby pictures or contact head.

Send: send by MMS or Bluetooth to other contacts or equipment.

Rename: To rename a picture












Delete: Delete the picture

Tags: mark the selected picture or all pictures

Slide show: The slide sequence plays the album all the pictures

Details: See the picture name; file type, size, date, and resolution and storage location information.


Choose to view pictures, you can achieve by selecting the corresponding icon on the following:

	Is set to contact picture
	Contact head cut
	Send by MMS or Bluetooth to other contacts or equipment
	Zoom in / out picture
	delete
	Details
	Open a menu
	Previous
	Slide show
	Next
	return

9.7. Radio

Into the FM radio, please make sure you have connected to the headset.

Into the radio interface, you can select the icon to complete the following functions:

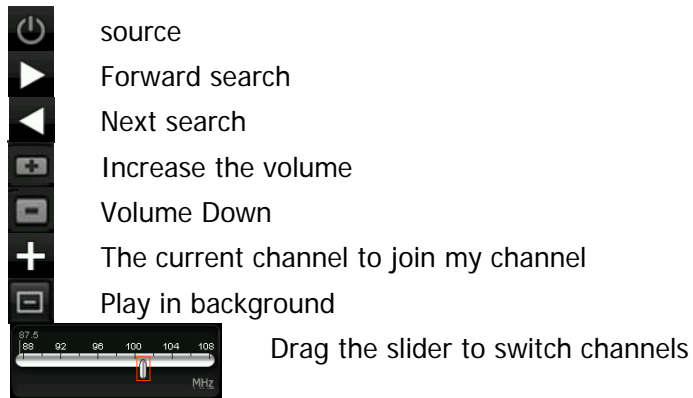

Through the Options menu, you can achieve the following:
(Turn) turn the radio off: open, off FM radio.

My Channel: nine channels for the mobile phone set, you can switch to your favorite channels.

Add to my channel: the current channel to join my channel.

Manual input: open input method and switch directly to your specified channel.

Background play: open and close.

Hands-free: open and close.

The option in my channel, you can achieve the following: Play, edit, remove, and remove all.

9.8. Recorders

Into the recorder feature, click  , To start recording, click  ,

To stop the recording, the completion of a recording, you can immediately play, or through the Options menu to achieve the following: new, send, set, rename, delete, view the file.

New: Start a new recording

Send: send by MMS or Bluetooth to other contacts or equipment.

Set: Set ringtones, a contact phone ring tones, alarm clock.

Rename: To rename a picture

Delete: Delete the picture

View Files: View all sound recordings.

9.9. Analog TV

Entry mode TV function can be up / down arrow keys to select My TV, Channel list, and search platform, screen shots, regional settings, Zoom.

My TV: The function of television broadcast;

Channel List: Displays the search to the channel list;

Tuning: You can search the channels;

Screenshot: view the film when watching television screenshot;

Regional Settings: Select your area, there are several areas to choose from;

Zoom: the proportion of screen play, there 4:3, 16:9.

10. Document Management

This option is used to manage you increase the picture, audio, ring tones, music and animation.

14.1. Select "Phone", select the picture into document management

14.2. Select "Storage Card", the device is an external device, can increase the storage capacity of mobile phones.

Open the folder, you can choose which files or folders stored for the following:

File operations: view, set, send, rename, delete, copy, move, search,

memory status.

Operation on a folder: Open, delete, search, memory status

11. Fun & Games

The phone has JAVA; you can install your favorite games. Another feature for cell phones fruit plate, and e-books .

Note: need to install the T-card packet can use this feature.

11.1. EBook

E-books for your memory card out of all TXT e-book-style catalog, e-books bottom of the screen display size and number of rows, you can choose the arrow keys to scroll, press OK to open.

Click the option, will open the menu, you can perform the following **functions:** view, delete, delete all, flip the format, coding format, the file information

View: Open the e-book

Delete: Delete the currently selected e-book

Remove All: Remove the entire e-book directory

Flip format: Set the time to read e-books flip format, there are four formats to choose from: each scroll line, each rolling three lines, six lines per roll, each roll a

File Information: Displays the name of the currently selected e-book, size, and format

Open the e-book, you can scroll to read the arrow keys can also click Options, start menu, complete the following functions: full screen browsing, my bookmarks, flip, coding format and file information.

Full Screen: full screen browsing, press the OK button can quickly toggle full-screen view and regular view

My Bookmarks: bookmark the current reading position, or choose a

bookmark in the past to join, keep reading. In the bookmarks list, by the mid-point option, may have to rename the saved bookmark, cover, remove, and delete all.

Flip mode: can be set on the flip mode, can be set: each scroll line, each rolling three lines, six lines per roll, each roll a

Coding format: e-book can set the encoding format

Note: need to install the T-card packet can use this feature.

11.2. MSN

Information and communication tools, you can chat by MSN platform, work and life to your unlimited pleasure.

12. Network Services

12.1. WAP browser

Here you can browse WAP sites. Make sure you use the phone before opening the GPRS or EDGE network.

12.2. Bluetooth

You can achieve this Bluetooth-enabled switch, the query has matching equipment, and search and other related equipment and set up the Bluetooth feature.

12.3. Operator services

Operators to offer exciting services will be at this show.

13. Toolbox

From the main menu to access the transaction manager, you can use the functions: calendar, alarm clock, calculator, stopwatch, countdown, world clock, quick list.

13.1. Calendar

You can check the calendar tool by the date and week, and can edit,

and check the date of events in different tasks. Options menu you can **achieve the following functions:** add events, week view, event list, to a specific date, set, delete all, find events, memory status.

Add Events: The editor will be displayed; you can choose to add an appointment or all day event. Editable fields are: subject, location, duplication, start date, start time, end time, alarm clock, and description. Schedule of shows and tips, will be displayed along with your settings and execution.

Week view: switch to a weekly view, each page will display the calendar week.

Event list: the current month for all events will be listed, you can use options to do editing events, delete events, send event.

To a specific date: You can enter by going directly to a specific date.

Settings: You can set the default view mode this week, the start date.

Delete all: You can choose to delete the previous calendar day, or to schedule deleted.

Find events: You can enter text to find events by.

Memory status: You can view this event and the total number of the remaining space.

13.2. Alarm Clock

The phone has six groups of alarm; you can adjust the title for each group of alarm, time, status, period, ring tones. Alarm cycle options are: Once, daily, Monday, Tuesday, Wednesday, Thursday, Friday, Saturday, and Sunday.

Alarm will be set in your time and cycle occurs, and you can choose to stop or delay to remind

Stop: stop the current alarm clock.

Delayed Reminder: suspend alarm clock to remind ; remind again after 5 minutes.

13.3. Calculator

As a general and basic calculator, you can use the point of control figures for input and control point type of operation you want to calculate the required value.

13.4. Stopwatch

The mobile stopwatch functions to provide: full time and lap time of two tools, a total of 20 groups of tag.

13.5. World Clock

You will be in the painted screen to see the world map, time zone line through the points left and right side, switching the currently displayed city, and then simultaneously display the time zone of the city where the local time.

13.6. Countdown

Start by entering the time, you will be able to complete a period of time countdown.

13.7. Quick list

Through the shortcut list you can easily set features a variety of quick and fast card.

14. USB mode

When you connect the phone USB data line, will be through the menu options, your phone as: U-disk, modem, network cameras.

U disk function: You can use the computer to access, manage files on the phone.

Modem: You can set the phone to the modem.

Network Camera: You can use your phone as a network camera.

In addition to these features a modem function, no additional programs are installed, plug to use.

You can set the modem card to find the software, please use the transmission line to connect the phone and computer, and select the modem, then use the computer as the system prompts to install the software, select the memory card software, complete the installation. Your computer's Device Manager can see the Modem project, and monitor its driver software installed successfully.

Note:

- Such devices as mobile phones, the phone functions will not be used.
- If the connection after the USB data cable does not carry out any settings, the phone will enter the state of charge.

15. Appendix

15.1. Frequently Asked Questions

Phone can not boot

When the battery voltage is too low, it may cause phone not to boot, the battery charge.

Can not call certain telephone

Make sure you have done restriction call, the call has set limits will not be exhaled, or only a specific number of exhaled set.

My phone was picked up by other people

Make sure you have set up call forwarding, have set up call forwarding, calls will be transferred to a specific setting.

15.2. Display information

In operation, the following error message may be displayed:

Please insert the SIM card

Make sure you have to insert the SIM card, if your card has been inserted can not use, try using a dry cloth SIM card wipe the site of gold, and then again insert the SIM card, if you still can not use, please contact your system supplier.

No network

If you are no network coverage area, or between you and the transmitter have the physical obstructions, such as confined space, the standby screen will show no network, you can not dial or receive calls, you can try to close the window, has made network coverage.

Emergency calls only

When you are at your service provider outside the network coverage, but be received another network according to the signal, you can only set aside an emergency call, can not do a normal breath.

Invalid SIM card

Your SIM card is locked, or the SIM card in error, please insert correct SIM card or contact your system supplier.

Enter the PUK code

When your SIM PIN code three times lidocaine input error Ezra locked, the phone will ask you to enter the PUK code for unlocking, you must contact your system supplier to obtain the 8 digit PUK code . Warning: If you enter an incorrect PUK code consecutive seven times, your SIM card is permanently locked; you will have your system supplier to obtain a new SIM card.

15.3. Accessories

Quick Charger

Can be quickly filled with lithium batteries, batteries of different capacities, full time is different.

Note :

- Specific standby time and talk time, be based on actual use conditions.

- Use only mobile phone manufacturer approved batteries, chargers and other accessories, the use of other types of attachments, will be in breach of the phone recognition and warranty, and may be dangerous.

15.4. Maintenance Guide

Thank you for using the mobile phone, if your phone in the course of a problem, please contact the dealer or service center .

If your phone needs repair, the repair can be sent to a local point of maintenance, if there is no maintenance point, please phone and purchase your copy of the invoice to the Vendor the mail.

Your phone is a product of superior design and craftsmanship and should be treated with care; the following suggestions will help you to fulfill the obligations of the warranty terms, extending the life of mobile phones.

- The phone and all its parts and accessories of the reach of small children.
- Keep the device dry. Rain, humidity and all types of liquids or moisture can contain minerals that will corrode electronic circuits.
- Do not use in dusty areas or store the device, it will damage its moving parts.
- Do not store the device in hot areas. High temperatures can shorten the life of electronic devices, damage batteries, and warp or melt certain plastics.
- Do not store the device in cold areas. When the device temperature (to room temperature), the phone will be the formation of moisture, which may damage electronic circuit boards.
- Do not attempt to open the phone. The treatment of non-professionals on the phone may damage the phone.
- Do not drop, knock or shake the phone, otherwise they will damage the internal circuit boards.

- Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the phone. Do not paint the phone, Paint debris blocking the moving parts and thus affecting the normal operation.
- Replacement antenna, use only the supplied or approved antenna. Unauthorized antennas, modifications, attachments could damage the phone and violate regulations governing radio devices.

All of the above suggestions apply equally to your phone, battery, charger, accessories, if they do not work, please send it to the nearest qualified service facility.

FCC RF Exposure Information and Statement

The SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of tissue. Device types: Tike(FCC ID: Y2X-Tike) has also been tested against this SAR limit. The highest SAR value reported under this standard during product certification for use at the ear is 0.67W/kg and when properly worn on the body is 0.37W/kg. This device was tested for typical body-worn operations with the back of the handset kept 1.5cm from the body. To maintain compliance with FCC RF exposure requirements, use accessories that maintain a 1.5cm separation distance between the user's body and the back of the handset. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.