

TEST REPORT

Reference No...... : WTX24X04087264W012
FCC ID..... : YHLBLUK50K
Applicant..... : BLU Products, Inc.
Address..... : 8600 NW 36th Street, Suite #300 | Miami, FL 33166, USA
Manufacturer..... : The same as Applicant
Address..... : The same as Applicant
Product Name..... : Smart Phone
Model No...... : K50
FCC Part 2.1093
Standards..... : IEEE Std C95.1: 2019
IEEE Std C95.3: 2002 + Rev. 2008
IEC/IEEE 62209-1528 Ed. 1.0 (2020-10)
Date of Receipt sample..... : 2024-04-18
Date of Test..... : 2024-04-18 to 2024-06-04
Date of Issue..... : 2024-06-06
Test Report Form No...... : WTX_IEEE_1528W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,

Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Jack Sun

Jack Sun

Approved by:

Jason Su

Jason Su

TABLE OF CONTENTS

1. General Information	4
1.1 Product Description for Equipment Under Test (EUT)	4
1.2 Test Standards	11
1.3 Test Methodology	11
1.4 Test Facility	11
2. Summary of Test Results	12
3. Specific Absorption Rate (SAR)	13
3.1 Introduction	13
3.2 SAR Definition	13
4. SAR Measurement System	14
4.1 The Measurement System	14
4.2 Probe	14
4.3 Probe Calibration Process	16
4.4 Phantom	17
4.5 Device Holder	17
4.6 Test Equipment List	18
5. Tissue Simulating Liquids	19
5.1 Composition of Tissue Simulating Liquid	19
5.2 Tissue Dielectric Parameters for Head and Body Phantoms	20
5.3 Tissue Calibration Result	21
6. SAR Measurement Evaluation	22
6.1 Purpose of System Performance Check	22
6.2 System Setup	22
6.3 Validation Results	23
7. EUT Testing Position	25
7.1 Define Two Imaginary Lines on The Handset	25
7.2 Cheek Position	26
7.3 Tilted Position	26
7.4 Body Position	26
7.5 EUT Antenna Position	27
7.6 EUT Testing Position	28
8. SAR Measurement Procedures	30
8.1 Measurement Procedures	30
8.2 Spatial Peak SAR Evaluation	30
8.3 Area & Zoom Scan Procedures	31
8.4 Volume Scan Procedures	31
8.5 SAR Averaged Methods	31
8.6 Power Drift Monitoring	31
9. SAR Test Result	32
9.1 Conducted RF Output Power	32
9.2 Test Results for Standalone SAR Test	302
9.3 Simultaneous Multi-band Transmission SAR Analysis	349
10. Measurement Uncertainty	353
10.1 Uncertainty for SAR Test	353
Annex A. Plots of System Performance Check	355
Annex B. Plots of SAR Measurement	355
Annex C. EUT Photos	355
Annex D. Test Setup Photos	355
Annex E. Calibration Certificate	355

Report version

Version No.	Date of issue	Description
Rev.00	2024-06-06	Original
/	/	/

1. General Information

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT:	
Product Name:	Smart Phone
Brand Name:	BOLD
Model No.:	K50
Adding Model(s):	/
Rated Voltage:	DC3.87V
Battery Capacity:	5000mAh (C886351500P)
Adapter Model:	US-HJ-3024Q
	Input:AC100-240v~50/60Hz 0.8A
	Output:DC5V3000mA; OR DC9V3000mA; OR DC12V2750mA
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT:	
2G	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
RF Output Power:	Normal: GSM850: 32.86dBm, GSM1900: 29.89dBm, EDGE850: 26.50dBm, EDGE1900: 24.91dBm Hotspot ON: GSM1900: 26.97dBm, EDGE1900: 24.62dBm
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: -3.7dBi; GSM1900: -1.5dBi
GPRS/EDGE Class:	Class 12
3G	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 4, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 4: 1710-1755MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 4: 2110-2155MHz WCDMA Band 5: 869~894MHz
RF Output Power:	Normal: WCDMA Band 2: 22.62dBm, WCDMA Band 4: 22.88dBm, WCDMA Band 5: 22.25dBm Hotspot ON: WCDMA Band 2: 19.65dBm, WCDMA Band 4: 19.87dBm, Sar sensor: WCDMA Band 2: 20.64dBm, WCDMA Band 4: 20.87dBm
Type of Modulation:	BPSK, QPSK, 16QAM
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: -1.5dBi, WCDMA Band 4: -1.7dBi, WCDMA Band 5: -3.7dBi
4G	

Support Networks:	FDD-LTE, TDD-LTE
Support Band:	FDD-LTE Band 2, 4, 5, 7, 12, 13, 17, 25, 26, 66, 71 TDD-LTE Band 38, 41
Uplink Frequency:	FDD-LTE Band 2: Tx: 1850-1910MHz, FDD-LTE Band 4: Tx: 1710-1755MHz, FDD-LTE Band 5: Tx: 824-849MHz, FDD-LTE Band 7: Tx: 2500-2570MHz, FDD-LTE Band 12: Tx: 699-716MHz, FDD-LTE Band 13: Tx: 777-787MHz, FDD-LTE Band 17: Tx: 704-716MHz, FDD-LTE Band 25: Tx: 1850-1915MHz, FDD-LTE Band 26-1: Tx: 814-824MHz, FDD-LTE Band 26-2: Tx: 824-849MHz, TDD-LTE Band 38: Tx: 2570-2620MHz TDD-LTE Band 41: Tx: 2496-2690MHz FDD-LTE Band 66: Tx: 1710-1780MHz, FDD-LTE Band 71: Tx: 663-698MHz,
Downlink Frequency:	FDD-LTE Band 2: Rx: 1930-1990MHz, FDD-LTE Band 4: Rx: 2110-2155MHz, FDD-LTE Band 5: Rx: 869-894MHz, FDD-LTE Band 7: Rx: 2620-2690MHz, FDD-LTE Band 12: Rx: 729-746MHz, FDD-LTE Band 13: Rx: 746-756MHz, FDD-LTE Band 17: Rx: 734-746MHz, FDD-LTE Band 25: Rx: 1930-1995MHz, FDD-LTE Band 26: Rx: 859-869MHz, FDD-LTE Band 26: Rx: 869-894MHz, TDD-LTE Band 38: Rx: 2570-2620MHz TDD-LTE Band 41: Rx: 2496-2690MHz FDD-LTE Band 66: Rx: 2110-2200MHz, FDD-LTE Band 71: Rx: 617-652MHz,
RF Output Power:	Normal: FDD-LTE Band 2: 22.84dBm FDD-LTE Band 4: 23.05dBm FDD-LTE Band 5: 23.93dBm FDD-LTE Band 7: 22.86dBm FDD-LTE Band 12: 23.74dBm FDD-LTE Band 13: 23.78dBm FDD-LTE Band 17: 23.79dBm FDD-LTE Band 25: 22.81dBm FDD-LTE Band 26(814-824MHz): 24.07dBm FDD-LTE Band 26(824-849MHz): 23.84dBm TDD-LTE Band 38: 22.32dBm

	TDD-LTE Band 41: 22.45dBm FDD-LTE Band 66: 23.25dBm FDD-LTE Band 71: 23.67dBm Sar sensor: FDD-LTE Band 2: 21.75dBm FDD-LTE Band 4: 20.98dBm FDD-LTE Band 7: 20.87dBm FDD-LTE Band 25: 20.76dBm TDD-LTE Band 38: 21.12dBm TDD-LTE Band 41: 21.91dBm FDD-LTE Band 66: 20.78dBm Hotspot ON: FDD-LTE Band 2: 20.70dBm FDD-LTE Band 4: 20.07dBm FDD-LTE Band 7: 20.96dBm FDD-LTE Band 25: 18.79dBm TDD-LTE Band 38: 20.15dBm TDD-LTE Band 41: 20.99dBm FDD-LTE Band 66: 19.15dBm
Type of Modulation:	QPSK, 16QAM
Antenna Type:	Integral Antenna
Antenna Gain:	FDD-LTE Band 2: -1.5dBi, FDD-LTE Band 4: -1.7dBi, FDD-LTE Band 5: -3.7dBi, FDD-LTE Band 12: -0.8dBi, FDD-LTE Band 13: -5.2dBi, FDD-LTE Band 17: -5.4dBi FDD-LTE Band 25: -1.5dBi FDD-LTE Band 26: -3.7dBi TDD-LTE Band 38: -1.2dBi TDD-LTE Band 41: -1.2dBi FDD-LTE Band 66: -1.7dBi FDD-LTE Band 71: -6.2dBi
5G NR	
Support Networks:	5G NR
Support Band:	n2; n5; n25; n41; n66; n71; n77
EN-DC Mode	DC_2A_n41A; DC_2C_n41A; DC_2A_n66A; DC_2A_n77A; DC_4A_n41A; DC_5A_n2A; DC_5A_n66A; DC_5A_n77A; DC 7A_n2A; DC_7A_n66A; DC_7A_n77A; DC_12A_n2A; DC_12A n41A; DC_12A_n77A; DC_13A_n2A; DC_13A_n66A; DC 26A_n77A; DC_28A_n66A; DC_28A_n77A; DC_66A_n2A; DC_66A_n5A; DC_66A_n41A; DC_66A_n77A; DC_5A-7A_n77A
Frequency Range:	5G NR n2: Tx: 1850-1910MHz, Rx: 1930-1990MHz

	5G NR n5: Tx: 824-849MHz, Rx: 869-894MHz
	5G NR 25: Tx: 1850-1915MHz, Rx: 1930-1995MHz
	5G NR n41: Tx: 2496-2690MHz, Rx: 2496-2690MHz
	5G NR n66: Tx: 1710-1780MHz, Rx: 2110-2200MHz
	5G NR n71: Tx: 663-698MHz, Rx: 617-652MHz
	5G NR n77-1: Tx: 3450-3550MHz, Rx: 3450-3550MHz,
	5G NR n77-2: Tx: 3700-3980MHz, Rx: 3700-3980MHz
Modulation Type:	DFT-s-OFDM: PI/2 BPSK QPSK / 16QAM / 64QAM / 256QAM CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM
Max. RF Output Power:	Normal: 5G NR n2: 22.59dBm, 5G NR n5: 24.83dBm, 5G NR n25: 22.45dBm, 5G NR n41: 25.96dBm, 5G NR n66: 23.75dBm, 5G NR n71: 24.89dBm 5G NR n77_3450-3550MHz: 26.47dBm 5G NR n77_3700-3980MHz: 26.92dBm Sar sensor: 5G NR n2: 21.44dBm, 5G NR n25: 21.90dBm, 5G NR n41: 22.69dBm, 5G NR n66: 21.76dBm, 5G NR n77_3450-3550MHz: 23.11dBm 5G NR n77_3700-3980MHz: 23.30dBm Receiver ON: 5G NR n2: 16.75dBm, 5G NR n25: 16.86dBm, 5G NR n66: 16.65dBm, 5G NR n77_3450-3550MHz: 20.37dBm 5G NR n77_3700-3980MHz: 20.69dBm Hotspot ON: 5G NR n2: 20.92dBm, 5G NR n25: 20.89dBm, 5G NR n41: 22.10dBm, 5G NR n66: 20.81dBm, 5G NR n77_3450-3550MHz: 21.48dBm 5G NR n77_3700-3980MHz: 21.69dBm
Max. RF Output Power(EN-DC):	Normal: DC_7A_n2A: 23.24dBm, DC_66A_n5A: 23.61dBm, DC_4A_n41A: 25.86dBm, DC_5A_n66A: 23.88dBm,

	DC_2A_n77A_3450-3550MHz: 26.98dBm DC_2A_n77A_3700-3980MHz: 27.02dBm
Antenna Type:	Integral Antenna
Antenna Gain:	N2: -2.2dBi N5: -3.7dBi N25: -2.2dBi N41: -1.2dBi N66: -2.4dBi N71: -7.2dBi N77: -0.5dBi
WIFI(5GHz)	
Support Standards:	802.11a, 802.11n-HT20/40, 802.11ac-VHT20/40/80
Frequency Range:	Band 1: 5180-5240MHz,Band 2: 5260-5320MHz, Band 3: 5500-5700MHz,Band 4: 5745-5825MHz
RF Output Power:	Normal: 14.80dBm (Conducted) Receiver ON: 13.93dBm (Conducted)
Type of Modulation:	QPSK, 16QAM, 64QAM;256QAM; 1024QAM
Type of Antenna:	Integral Antenna
Antenna Gain:	-1.2dBi
WIFI(2.4GHz)	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n-HT20, 2422-2452MHz for 802.11n-HT40
RF Output Power:	Normal: 18.86dBm (Conducted) Receiver ON: 14.41dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11 for 802.11b/g/n-HT20 7 for 802.11n-HT40
Channel Separation:	5MHz
Antenna Type:	Integral Antenna
Antenna Gain:	-1dBi
Bluetooth	
Bluetooth Version:	Bluetooth V5.2
Frequency Range:	2402-2480MHz
RF Output Power:	17.61dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Quantity of Channels:	79/40
Channel Separation:	1MHz/2MHz
Antenna Type:	Integral Antenna
Antenna Gain:	-1dBi

NFC	
Support Standards:	NFC
Frequency Range:	13.56MHz
Max. Field Strength:	60.52dBuV/m (at 3m)
Antenna Type:	Integral Antenna
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The following report is accordance with FCC 47 CFR Part 2.1093, IEEE Std C95.1: 2019, IEEE Std C95.3: 2002 + Rev. 2008, IEC/IEEE 62209-1528 Ed. 1.0 (2020-10), KDB 447498 D01 v06, KDB 648474 D04 v01r03, KDB 248227 D01 v02r02, KDB 941225 D01 v03r01, KDB 941225 D05 v02r05 , and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02.

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02. The public notice KDB 447498 D01 v06 for Mobile and Portable Devices RF Exposure Procedure also.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010. Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464 A and the CAB identifier is CN0057.

2. Summary of Test Results

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Head SAR	Body-worn (15mm Gap)	Hotspot (10mm Gap)	SAR _{1g} Limit (W/kg)
	Maximum SAR _{1g} (W/kg)	Maximum SAR _{1g} (W/kg)	Maximum SAR _{1g} (W/kg)	
GSM	0.222	0.172	0.435	1.6
WCDMA	0.177	0.346	0.501	1.6
LTE	0.182	0.479	0.725	1.6
NR SA	0.456	0.271	0.442	1.6
NR EN-DC	0.405	0.245	0.404	1.6
WLAN 5GHz	0.633	0.293	0.466	1.6
WLAN 2.4GHz	0.167	0.068	0.121	1.6
Bluetooth	0.053	0.012	0.026	1.6
Simultaneous Transmission	1.239	0.840	1.220	1.6

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and IEEE Std C95.1: 2019, and had been tested in accordance with the measurement methods and procedure specified in IEC/IEEE 62209-1528 Ed. 1.0 (2020-10) and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02.

3. Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement System

4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.




The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

4.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SSE2 SN 18/21 EPG0356, and refer to the calibration report for probe parameters.

Probe calibration is realized, in compliance with EN 62209-1 and IEC/IEEE 62209-1528:2020, with CALISAR, Antennas proprietary calibration system. The calibration is performed with the EN 62209-1 annexes technique using reference guide at the five frequencies.

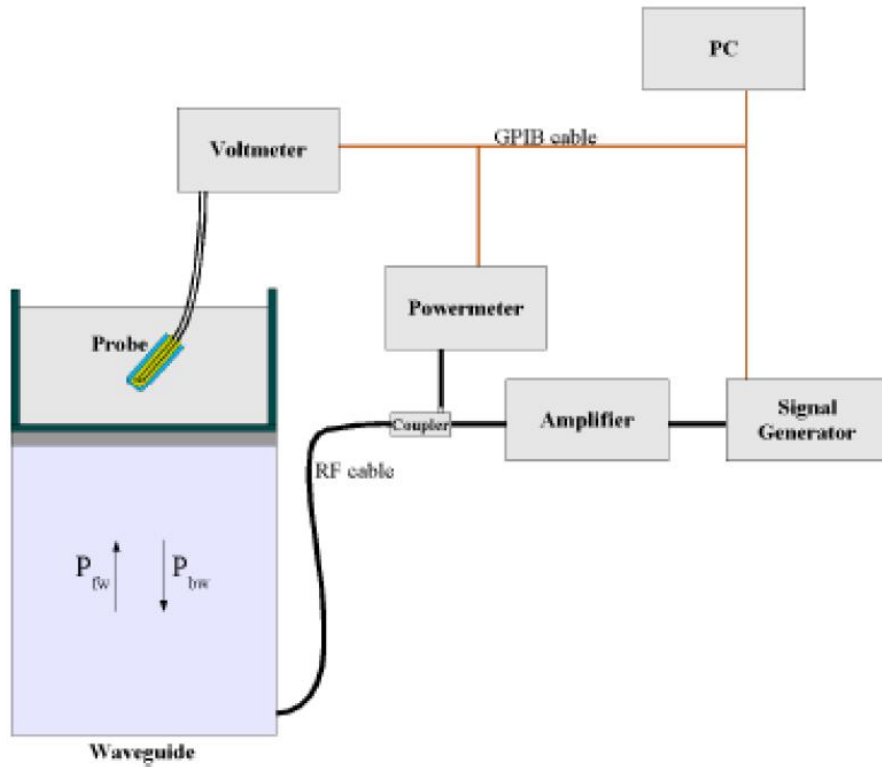

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-(2z/\delta)}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b =Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/Vlin(N) \quad (N=1,2,3)$$

The linearised output voltage Vlin(N) is obtained from the displayed output voltage V(N) using

$$Vlin(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

4.3 Probe Calibration Process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm².

Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

- Δt = exposure time (30 seconds),
- C = heat capacity of tissue (brain or muscle),
- ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

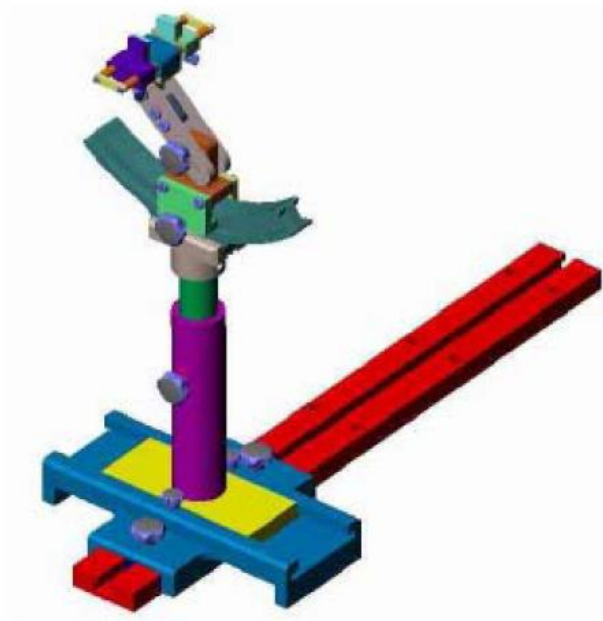

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

4.6 Test Equipment List

Fixed asset Number	Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
WTXE1053A1006	E-Field Probe	MVG	SSE2	SN 18/21 EPGO356	2023-07-07	2024-07-06
WTXE1053A1001-001	750MHz Dipole	MVG	SID750	SN 47/12 DIP 0G750-203	2023-08-20	2026-08-19
WTXE1053A1001-002	835MHz Dipole	MVG	SID835	SN 47/12 DIP 0G835-204	2023-08-20	2026-08-19
WTXE1053A1001-004	1800MHz Dipole	MVG	SID1800	SN 47/12 DIP 1G800-206	2023-08-20	2026-08-19
WTXE1053A1001-005	1900MHz Dipole	MVG	SID1900	SN 47/12 DIP 1G900-207	2023-08-20	2026-08-19
WTXE1053A1001-007	2450MHz Dipole	MVG	SID2450	SN 13/15 DIP 2G450-364	2023-08-20	2026-08-19
WTXE1053A1006-002	2600MHz Dipole	MVG	SID2600	SN 28/21 DIP 2G600-590	2021-07-19	2024-07-18
WTXE1053A1006-004	3500MHz Dipole	MVG	SID3500	SN 28/21 DIP 3G500-592	2021-07-19	2024-07-18
WTXE1053A1006-005	3700MHz Dipole	MVG	SID3700	SN 28/21 DIP 3G700-593	2021-07-19	2024-07-18
WTXE1053A1006-006	3900MHz Dipole	MVG	SID3900	SN 28/21 DIP 3G900-594	2021-07-19	2024-07-18
WTXE1035A1009	5 GHz Dipole	MVG	SID5000	SN 02/21 DIP 5G000-543	2021-07-21	2024-07-20
WTXE1053A1001-010	Dielectric Probe	SATIMO	SCLMP	SN 47/12 OCPG49	2024-02-24	2025-02-23
WTXE1075A1003	Power meter	Keithley	3500	1232959	2024-02-24	2025-02-23
WTXE1075A1002	Power meter	Keithley	3500	1162591	2024-02-24	2025-02-23
WTXE1104A1003	EXG Analog Signal Generator	KEYSIGHT	N5173B	MY61252892	2024-02-24	2025-02-23
WTXE1022A1002	GSM Tester	Rohde & Schwarz	CMU200	114403	2024-02-27	2025-02-26
WTXE1041A1002	Communications Tester	Rohde & Schwarz	CMW500	148650	2024-03-19	2025-03-18
WTXE1036A1001	Network Analyzer	Rohde & Schwarz	ZVB 8	101353	2023-10-17	2024-10-16

5. Tissue Simulating Liquids

5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.



Liquid Height for Body SAR

The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	Sugar (%)	HEC (%)	Preventol (%)	DGBE (%)
Head/Body						
750	41.1	1.4	57.0	0.2	0.3	0
835	40.3	1.4	57.9	0.2	0.2	0
1700-1900	55.2	0.3	0	0	0	44.5
2450	55.0	0.1	0	0	0	44.9
2600	54.9	0.1	0	0	0	45.0
3500	71.6	1.3	10.9	0.7	0.7	14.8
3700	71.7	1.3	10.8	0.6	0.8	14.8
3900	71.7	1.3	10.8	0.6	0.8	14.8

Frequency (MHz)	Water (%)	Hexyl Carbitol (%)	Triton X-100 (%)
Head/Body			
5000-6000	65.52	17.24	17.24

5.2 Tissue Dielectric Parameters for Head and Body Phantoms

According to FCC KDBs, IEC/IEEE 62209-1528 Ed. 1.0 (2020-10) and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

Target Frequency (MHz)	Head		Body	
	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity (σ)	Permittivity (ϵ_r)
150	0.76	52.3	0.80	61.9
300	0.87	45.3	0.92	58.2
450	0.87	43.5	0.94	56.7
750	0.89	41.9	0.96	55.5
835	0.90	41.5	0.97	55.2
900	0.97	41.5	1.05	55.0
915	0.98	41.5	1.06	55.0
1450	1.20	40.5	1.30	54.0
1610	1.29	40.3	1.40	53.8
1800-2000	1.40	40.0	1.52	53.3
2450	1.80	39.2	1.95	52.7
2600	1.96	39.0	2.16	52.5
3000	2.40	38.5	2.73	52.0
3300	2.88	37.2	3.04	49.3
3500	3.07	36.5	3.29	48.6
3700	3.35	35.2	3.62	47.1
3900	3.62	34.6	4.07	46.7
4200	3.58	37.2	4.08	48.9
5200	4.66	36.0	5.30	49.0
5400	4.86	35.8	5.53	48.7
5600	5.07	35.5	5.77	48.5
5800	5.27	35.3	6.00	48.2

5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Head Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading (σ)	Target (σ)	Delta (%)	Reading (εr)	Target (εr)	Delta (%)		
750	22.2	0.90	0.89	0.90	42.23	41.90	0.79	±5	2024-05-06
835	22.2	0.92	0.90	0.92	42.01	41.50	1.23	±5	2024-05-09
1800	22.5	1.76	1.80	-2.22	40.42	39.20	3.11	±5	2024-05-14
1900	22.3	1.95	1.96	-0.51	40.38	39.00	3.54	±5	2024-05-17
2450	22.1	1.76	1.80	-2.22	39.12	39.20	-0.20	±5	2024-05-23
2600	22.1	1.93	1.96	-1.53	38.87	39.0	-0.33	±5	2024-05-20
3500	22.4	3.05	3.07	-0.65	36.86	36.5	0.99	±5	2023-06-05
3700	22.4	3.32	3.35	-0.90	35.46	35.2	0.74	±5	2023-06-05
3900	22.4	3.64	3.62	0.55	34.93	34.6	0.95	±5	2023-06-05
5200	22.8	4.63	4.66	-0.64	37.49	36.00	4.14	±5	2024-05-25
5400	22.8	4.88	4.86	0.41	37.25	35.80	4.05	±5	2024-05-25
5600	22.8	5.06	5.07	-0.20	36.19	35.50	1.94	±5	2024-05-27
5800	22.8	5.24	5.27	-0.57	36.23	35.30	2.63	±5	2024-05-27


6. SAR Measurement Evaluation

6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835MHz, 1800MHz, 1900MHz, 2450MHz, 2600MHz, and 5GHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

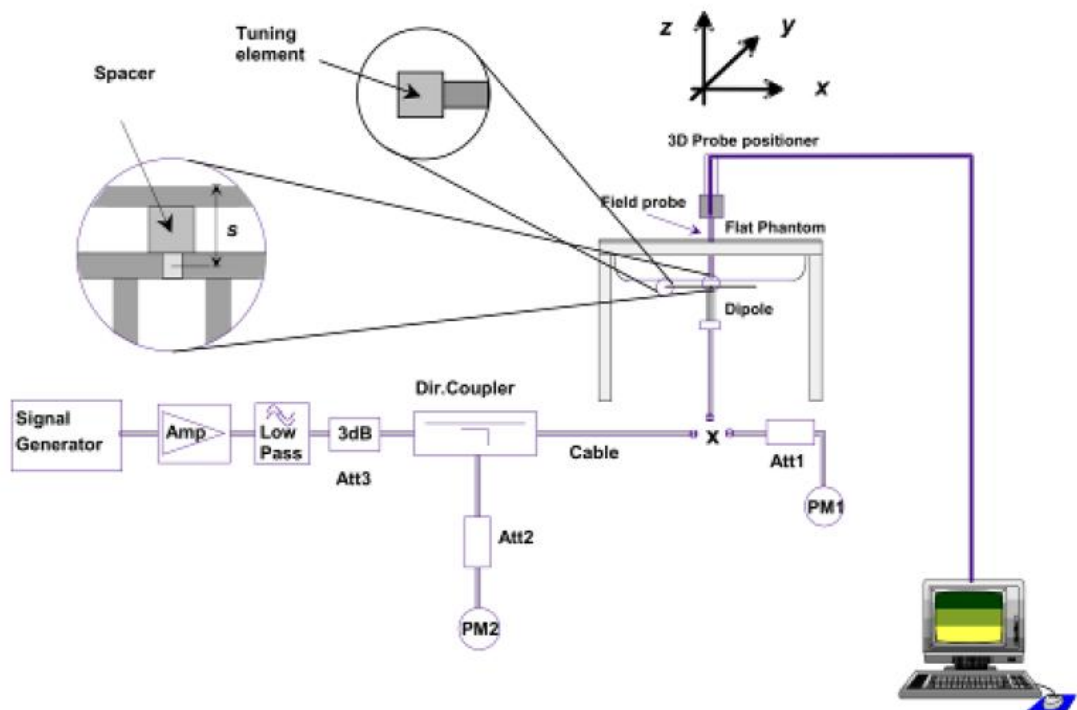

System Verification Setup Block Diagram



Setup Photo of Dipole Antenna

The output power on dipole port must be calibrated to 24 dBm(250 mW) before dipole is connected.

6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency	Targeted SAR _{1g}	Measured SAR _{1g}	Normalized SAR _{1g}	Tolerance	Date
MHz	(W/kg)	(W/kg)	(W/kg)	(%)	
Head					
750	8.78	2.051	8.204	-6.56	2024-05-06
835	9.65	2.210	8.840	-8.39	2024-05-09
1800	38.76	9.624	38.496	-0.68	2024-05-14
1900	39.59	10.223	40.892	3.29	2024-05-17
2450	54.31	13.747	54.988	1.25	2024-05-23
2600	56.81	14.815	59.260	4.31	2024-05-20
3500	68.86	16.854	67.416	-2.10	2023-06-05
3700	67.40	15.827	63.308	-6.07	2023-06-05
3900	67.42	15.499	61.996	-8.05	2023-06-05
5200	75.31	18.567	74.268	-1.38	2024-05-25
5400	79.56	18.979	75.916	-4.58	2024-05-25
5600	78.31	19.008	76.032	-2.91	2024-05-27
5800	78.05	18.087	72.348	-7.31	2024-05-27

Remark: Referring to IEC/IEEE 62209-1528 Ed. 1.0 (2020-10), the system check shall be performed at a test frequency that is within $\pm 10\%$ or ± 100 MHz of the compliance test mid-band frequency, so the 1750 MHz system verification is made of 1800MHz Dipole.

Targeted and Measurement SAR

Please refer to Annex A for the plots of system performance check.

7. EUT Testing Position

7.1 Define Two Imaginary Lines on The Handset

- (a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the Front Side of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

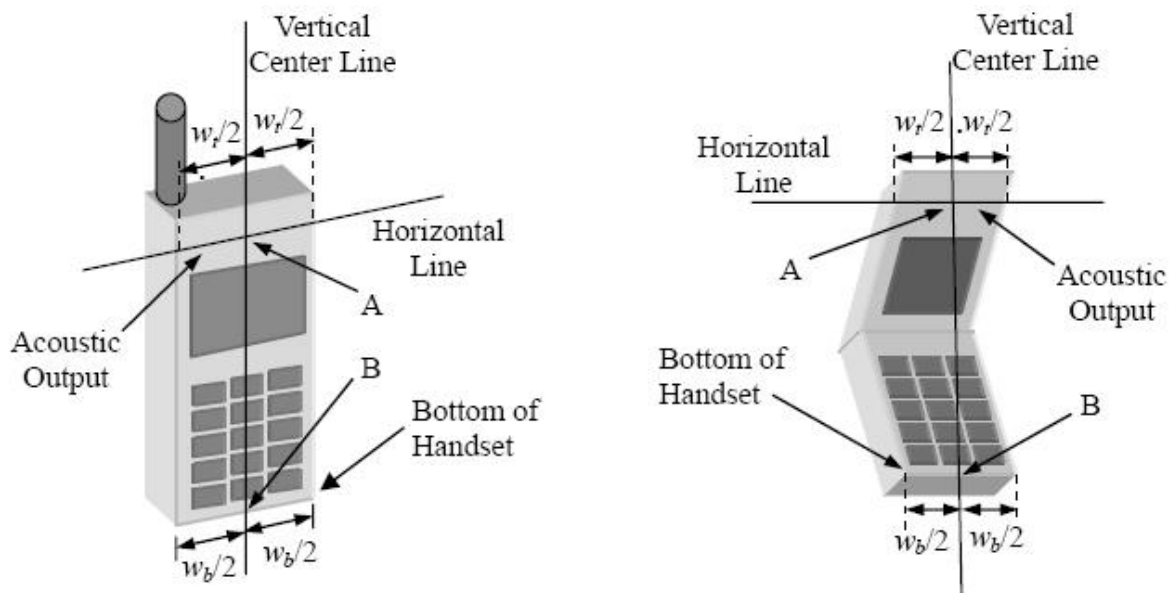


Illustration for Handset Vertical and Horizontal Reference Lines

7.2 Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 7.2).

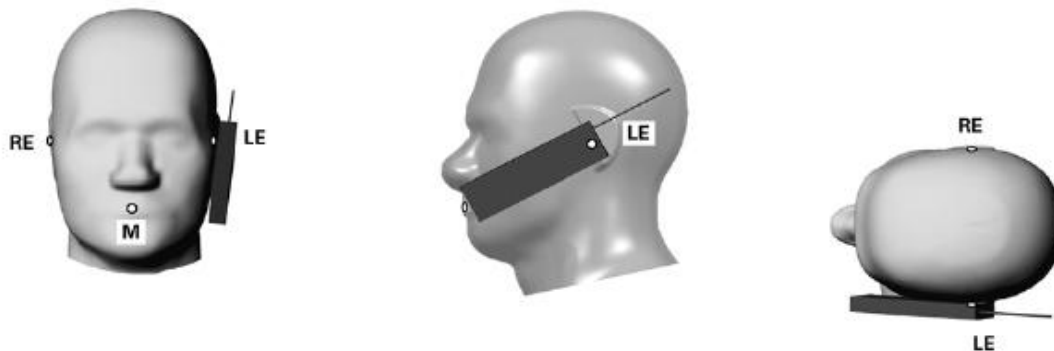


Illustration for Cheek Position

7.3 Tilted Position

- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 7.3).

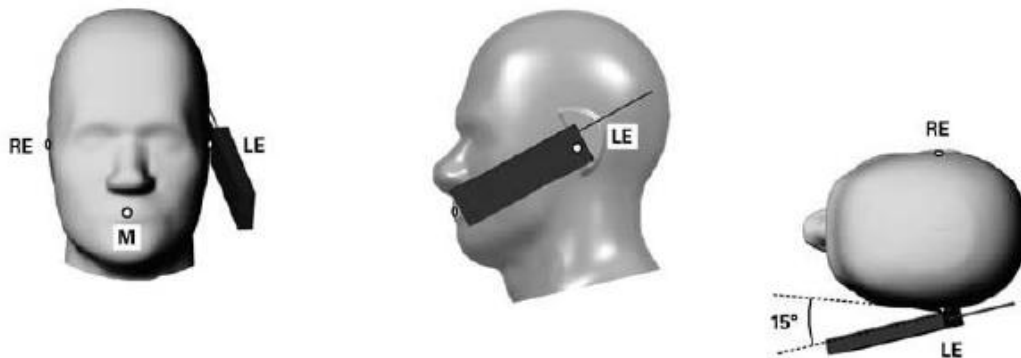


Illustration for Tilted Position

7.4 Body Position

- (a) To position the device parallel to the phantom surface with each side.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 10mm.


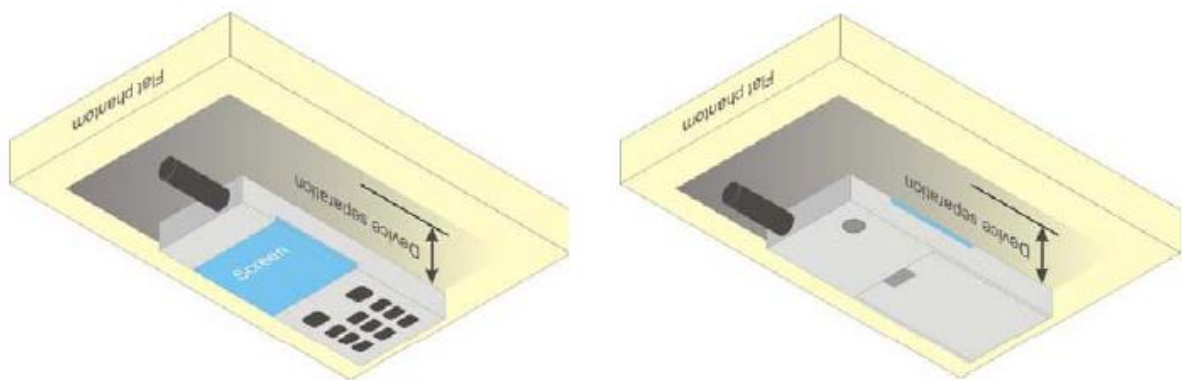


Illustration for Body Position

7.5 EUT Antenna Position

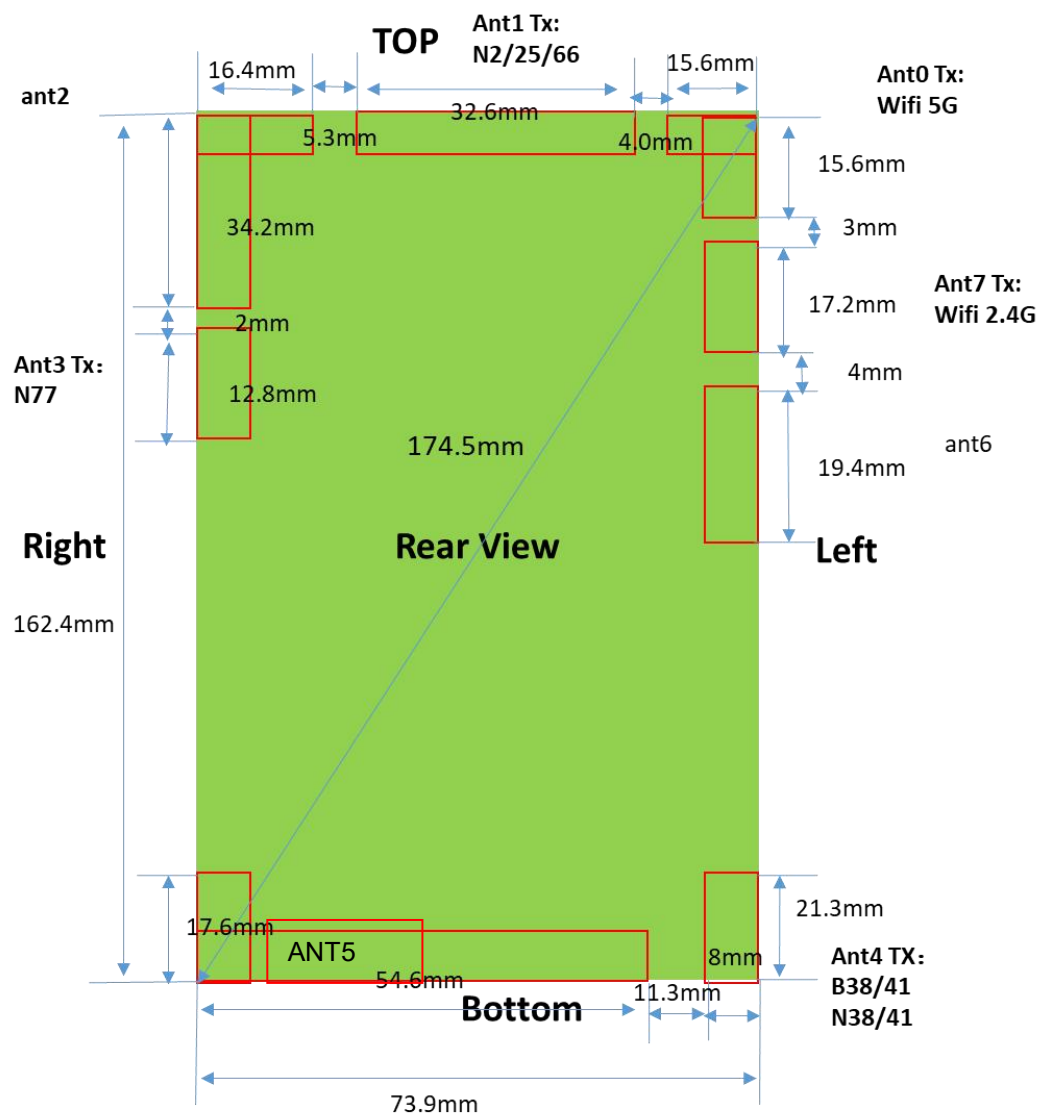

EUT Size: Long*Width =162.4mm*73.9mm
Block Diagram for EUT Antenna Position

Distance of EUT antenna-to-edge/surface(mm),						
Antennas	Back side	Front side	Left Edge	Right Edge	Top Edge	Bottom Edge
ANT0	<25	<25	<25	58.3	<25	146.8
ANT1	<25	<25	<25	<25	<25	>25
ANT3	<25	<25	>25	<25	36.2	126.2
ANT4	<25	<25	<25	54.6	>25	<25
ANT5	<25	<25	<25	<25	>25	<25
ANT7	<25	<25	<25	>25	<25	143.8

7.6 EUT Testing Position

Head/Body mode SAR assessments are required for this device. This EUT was tested in different positions for different SAR test modes, more information as below:

Head SAR tests				
Antennas	Right Cheek	Left Cheek	Right Tilted	Left Tilted
ANT0	Yes	Yes	Yes	Yes
ANT1	Yes	Yes	Yes	Yes
ANT3	Yes	Yes	Yes	Yes
ANT4	Yes	Yes	Yes	Yes
ANT5	Yes	Yes	Yes	Yes
ANT7	Yes	Yes	Yes	Yes

Body-worn SAR tests, Test distance: 10mm		
Antennas	Front	Back
ANT0	Yes	Yes
ANT1	Yes	Yes
ANT3	Yes	Yes
ANT4	Yes	Yes
ANT5	Yes	Yes
ANT7	Yes	Yes

Hotspot SAR tests, Test distance: 10mm						
Antennas	Front	Back	Left Side	Right Side	Top Side	Bottom Side
ANT0	Yes	Yes	Yes	No	Yes	No
ANT1	Yes	Yes	Yes	Yes	Yes	No
ANT3	Yes	Yes	No	Yes	No	No
ANT4	Yes	Yes	Yes	No	No	Yes
ANT5	Yes	Yes	Yes	Yes	No	Yes
ANT7	Yes	Yes	Yes	No	Yes	No

Remark:

1. Referring to KDB 941225 D06, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the Hotspot ON test separation distances is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
2. Referring to KDB 447498 D01v06, a conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets should be used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer according to the typical body-worn accessories users may acquire at the time of equipment certification, but not more than 2.5 cm, to enable users to purchase aftermarket body-worn accessories with the required minimum separation.
3. Referring to KDB 648474 D04 Handset SAR v01r03, 10-g extremity SAR is required only for the surfaces and edges with Hotspot ON 1-g reported SAR $> 1.2 \text{ W/kg}$.
4. ANT0: WLAN(5GHz)
ANT1: 5G NR n2; 5G NR n25; 5G NR n66; DC_7A_n2A; DC_5A_n66A;
ANT3: 5G NR n77; DC_2A_n77A;
ANT4: TDD-LTE B38, TDD-LTE 41; 5G NR n41;
ANT5: GSM850; PCS1900; WCDMA Band 2; WCDMA Band 4; WCDMA Band 5;
FDD-LTE Band 2, 4, 5, 7, 12, 13, 17, 25, 26, 66, 71
5G NR n5; 5G NR n5n71;
ANT7: WLAN(2.4GHz)/Bluetooth
ANT2 and ANT6 Only supports receiver function.

Please refer to Annex D for the EUT test setup photos.

8. SAR Measurement Procedures

8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

8.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.5 SAR Averaged Methods

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

9. SAR Test Result

9.1 Conducted RF Output Power

Summary of Power Reduction:

- Device is support **Receiver ON/ Hotspot / Sensor ON** reduced power, there are 5G NR n2/25/66/77 support **Receiver ON**, there are PCS1900&WCDMA B2/4<E B2/4/7/25/38/41/66&5G NR n2/25/41/66/77 support **Hotspot**, there are PCS1900&WCDMA B2/4<E B2/4/7/25/38/41/66&5G NR n2/25/41/66/77 support **Sensor ON**. The priority order is Receiver ON to Hotspot to Sensor on.
- WIFI2.4GHz&WIFI5GHz are support **Receiver ON** reduced power; WIFI2.4GHz/ WIFI5.2GHz /WIFI5.8GHz support **Hotspot**.


Reduced power off	Receiver ON	Hotspot	Sensor ON
Power Level P1	Power Level P2	Power Level P3	Power Level P4

Note:

The power management for SAR compliance at different exposure conditions (head, hotspot). The device will invoke corresponding work scenarios power level base on frequency bands/antennas. Refer to the KDB 388624 D02 Pre-Approval Guidance List v18r03.


9.1.1 Proximity Sensor Triggering Test

- Proximity sensor triggering distances:

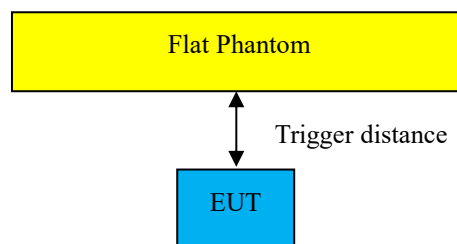


Position	Front side	Back side	Top side	Bottom side	Left side	Right side
Minimum	0	No	No	No	No	No
Required SAR Test	10	10	10	10	10	10

DUT Moving Away the Phantom Output Power:

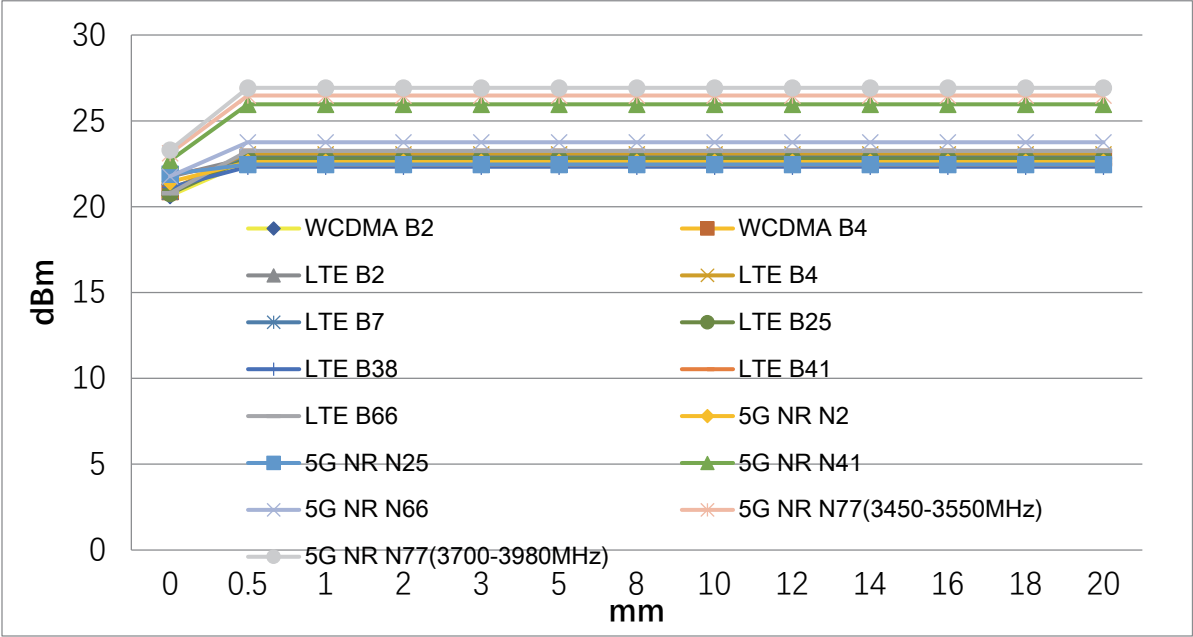

DUT Moving Toward the Phantom Output Power:

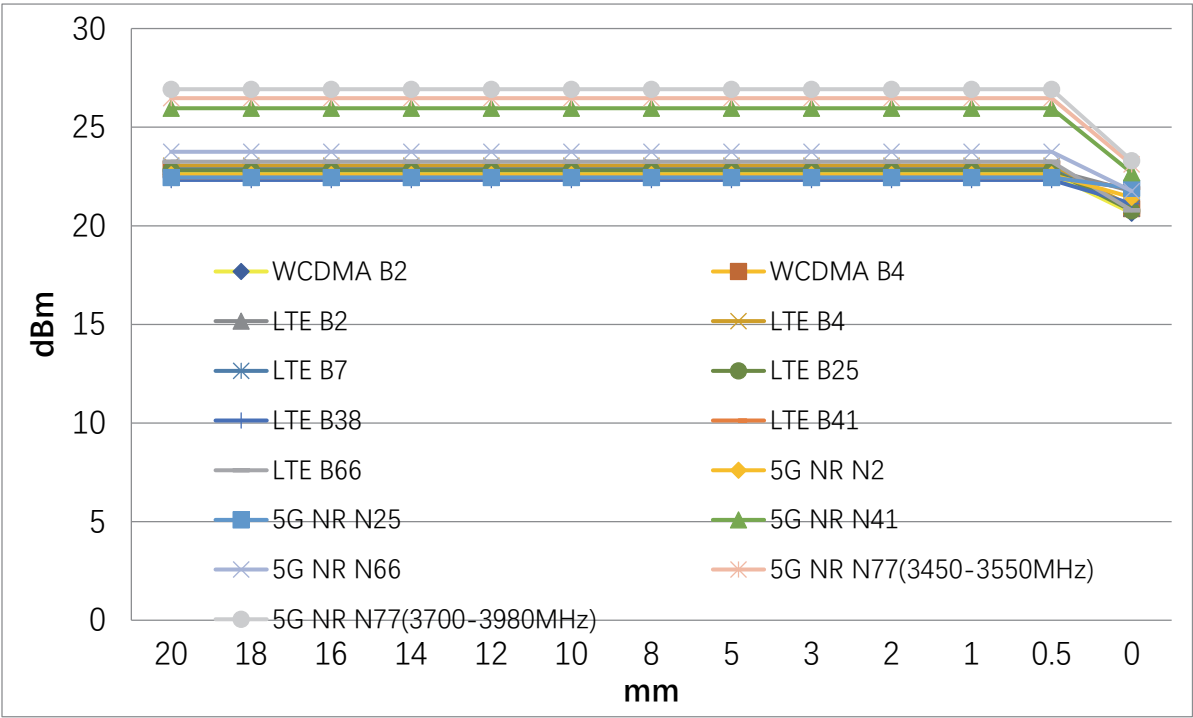


2. Proximity sensor coverage:

If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For p-sensor coverage testing, the device is moved and "along the direction of maximum antenna and sensor offset".

The proximity sensor and main antenna use same metallic electrode, so there is no spatial offset.

3. Device tilt angle influences to proximity sensor triggering

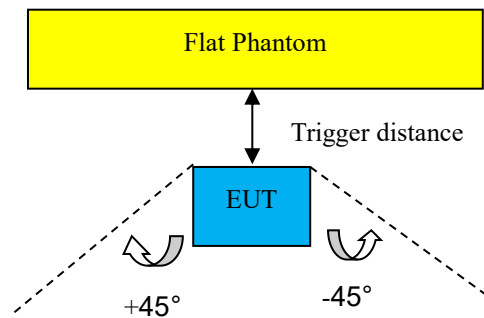

Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering												
Band	Min. trigger distance and maintained over $\pm 45^\circ$	Power Reduction Status										
		-45°	-35°	-25°	-15°	-5°	-0°	-5°	-15°	-25°	-35°	-45°
WCDMA B2	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
WCDMA B4	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
LTE B2	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
LTE B4	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
LTE B7	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
LTE B25	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
LTE B38	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
LTE B41	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
LTE 66	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
5G NR N2	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
5G NR N25	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
5G NR N41	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
5G NR N66	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
5G NR N77	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off

SAR test plan:

For front side, the worst trigger distance of proximity sensor is 0mm, thus we test these side in 10mm/15mm without power reduction.

9.1.2 Conducted RF Output power result:

GSM - Burst Average Power (dBm)								
Band	GSM850(P1)			Tune-up power (dBm)	PCS1900(P1)			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	32.75	32.77	32.56	33.0	29.75	29.89	29.86	30.0
GPRS (1 slot)	32.79	32.86	32.52	33.0	29.10	29.43	29.68	30.0
GPRS (2 slots)	31.83	31.87	31.63	32.0	27.06	27.42	27.68	28.0
GPRS (3 slots)	29.84	29.84	29.63	30.0	25.05	25.41	25.65	26.0
GPRS (4 slots)	28.75	28.77	28.58	29.0	24.09	24.45	24.72	25.0
EDGE (1 slot)	26.35	26.12	26.50	27.0	24.91	24.47	24.27	25.0
EDGE (2 slots)	25.16	25.13	25.41	26.0	23.83	23.48	23.34	24.0
EDGE (3 slots)	23.05	23.05	23.40	24.0	21.64	21.35	21.25	22.0
21EDGE (4 slots)	21.96	21.92	22.24	23.0	20.43	20.08	20.02	21.0

GSM - Source-Based Time-Average Power (dBm)								
Band	GSM850(P1)			Tune-up power (dBm)	PCS1900(P1)			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	23.75	23.77	23.56	24.0	20.75	20.89	20.86	21.0
GPRS (1 slot)	23.79	23.86	23.52	24.0	20.10	20.43	20.68	21.0
GPRS (2 slots)	25.83	25.87	25.63	26.0	21.06	21.42	21.68	22.0
GPRS (3 slots)	25.59	25.59	25.38	26.0	20.80	21.16	21.40	22.0
GPRS (4 slots)	25.75	25.77	25.58	26.0	21.09	21.45	21.72	22.0
EDGE (1 slot)	17.35	17.12	17.50	18.0	15.91	15.47	15.27	17.0
EDGE (2 slots)	19.16	19.13	19.41	20.0	17.83	17.48	17.34	18.0
EDGE (3 slots)	18.80	18.80	19.15	20.0	17.39	17.10	17.00	18.0
EDGE (4 slots)	18.96	18.92	19.24	20.0	17.43	17.08	17.02	18.0

Note: The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time-average power = Burst averaged power - Duty cycle factor in dB

Duty cycle factor = 9 dB for 1 Tx slot, 6 dB for 2 Tx slots, 4.25 dB for 3 Tx slots, 3 dB for 4 Tx slots

GSM - Burst Average Power (dBm)							
Band	GSM 1900 (P3)			Tune-up power (dBm)			
Channel	512	661	810				
Frequency (MHz)	1850.2	1880	1909.8				
GSM	26.97	26.34	26.62	27.0			
GPRS (1 slot)	25.97	26.34	26.67	27.0			
GPRS (2 slots)	22.90	23.29	23.59	24.0			
GPRS (3 slots)	21.92	22.32	22.63	23.0			
GPRS (4 slots)	20.82	21.23	21.55	22.0			
EDGE (1 slot)	24.62	24.31	24.20	25.0			
EDGE (2 slots)	23.52	23.37	23.21	24.0			
EDGE (3 slots)	21.36	21.22	21.08	22.0			
EDGE (4 slots)	20.08	19.94	19.87	21.0			

GSM - Source-Based Time-Average Power (dBm)							
Band	GSM 1900 (P3)			Tune-up power (dBm)			
Channel	512	661	810				
Frequency (MHz)	1850.2	1880	1909.8				
GSM	17.97	17.34	17.62	18.0			
GPRS (1 slot)	16.97	17.34	17.67	18.0			
GPRS (2 slots)	16.90	17.29	17.59	18.0			
GPRS (3 slots)	17.67	18.07	18.38	19.0			
GPRS (4 slots)	17.82	18.23	18.55	19.0			
EDGE (1 slot)	15.62	15.31	15.20	16.0			
EDGE (2 slots)	17.52	17.37	17.21	18.0			
EDGE (3 slots)	17.11	16.97	16.83	18.0			
EDGE (4 slots)	17.08	16.94	16.87	18.0			

Note: The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time-average power = Burst averaged power - Duty cycle factor in dB

Duty cycle factor = 9 dB for 1 Tx slot, 6 dB for 2 Tx slots, 4.25 dB for 3 Tx slots, 3 dB for 4 Tx slots

Remark:

1. For Head SAR testing, GSM should be evaluated, therefore the EUT was set in GSM for GSM850 and GSM1900 due to its highest source-based time-average power.
2. For Body SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS (2TX slots) for GSM850(Normal), GPRS (4TX slots) for GSM1900(Normal), GPRS (4TX slots) for GSM1900(Hotspot), due to its highest source-based time-average power.
3. Per KDB 447498 D01 v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.

4. The DUT do not support DTM function.

WCDMA - Average Power (dBm)								
Band	WCDMA Band II (P1)				WCDMA Band IV(P1)			
Channel	9262	9400	9538	Tune-up power (dBm)	1312	1412	1513	Tune-up power (dBm)
Frequency (MHz)	1852.4	1880.0	1907.6		1712.4	1732.4	1752.6	
RMC 12.2k	22.49	22.45	22.62	23.0	22.88	22.78	22.83	23.0
HSDPA Subtest-1	20.47	20.56	20.79	21.0	20.97	20.86	20.88	21.0
HSDPA Subtest-2	19.98	20.06	20.27	21.0	20.45	20.36	20.37	21.0
HSDPA Subtest-3	19.99	20.09	20.31	21.0	20.52	20.41	20.40	21.0
HSDPA Subtest-4	19.95	20.03	20.28	21.0	20.44	20.36	20.36	21.0
HSUPA Subtest-1	18.43	18.5	18.67	21.0	18.91	18.80	18.83	21.0
HSUPA Subtest-2	18.44	18.49	18.75	21.0	18.92	18.80	18.80	21.0
HSUPA Subtest-3	19.45	19.53	19.72	21.0	19.91	19.81	19.82	21.0
HSUPA Subtest-4	17.95	18.03	18.2	21.0	18.46	18.32	18.32	21.0
HSUPA Subtest-5	19.4	19.47	19.66	21.0	19.74	19.77	19.78	21.0

WCDMA - Average Power (dBm)								
Band	WCDMA Band V(P1)							
Channel	4132	4182	4233	Tune-up power (dBm)				
Frequency (MHz)	826.4	836.4	846.6					
RMC 12.2k	22.25	22.08	22.10	22.5				
HSDPA Subtest-1	21.31	21.12	21.15	22.0				
HSDPA Subtest-2	20.82	20.63	20.65	22.0				
HSDPA Subtest-3	20.85	20.65	20.67	22.0				
HSDPA Subtest-4	20.81	20.60	20.65	22.0				
HSUPA Subtest-1	19.30	19.09	19.14	22.0				
HSUPA Subtest-2	19.30	19.10	19.12	22.0				
HSUPA Subtest-3	20.32	20.12	20.14	22.0				
HSUPA Subtest-4	18.81	18.59	18.65	22.0				
HSUPA Subtest-5	20.09	20.07	20.08	22.0				

WCDMA - Average Power (dBm)								
Band	WCDMA Band II(P3)				WCDMA Band IV(P3)			
Channel	9262	9400	9538	Tune-up power (dBm)	1312	1412	1513	Tune-up power (dBm)
Frequency (MHz)	1852.4	1880.0	1907.6		1712.4	1732.4	1752.6	
RMC 12.2k	19.54	19.65	19.45	20.0	19.36	19.57	19.87	20.0

WCDMA - Average Power (dBm)								
Band	WCDMA Band II (P4)				WCDMA Band IV(P4)			
Channel	9262	9400	9538	Tune-up power (dBm)	1312	1412	1513	Tune-up power (dBm)
Frequency (MHz)	1852.4	1880.0	1907.6		1712.4	1732.4	1752.6	
RMC 12.2k	20.42	20.43	20.64	21.0	20.85	20.76	20.87	21.0

Remark:

1. per KDB 941225 D01 v03, The 12.2kbps RMC mode was selected for SAR testing(the primary mode).
2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

LTE(P1)

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	22.11	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	21.09	PASS
Band2	1.4MHz	QPSK	18607	1RB#2	22.05	PASS
Band2	1.4MHz	16QAM	18607	1RB#2	21.09	PASS
Band2	1.4MHz	QPSK	18607	1RB#5	22.10	PASS
Band2	1.4MHz	16QAM	18607	1RB#5	21.05	PASS
Band2	1.4MHz	QPSK	18607	3RB#0	22.11	PASS
Band2	1.4MHz	16QAM	18607	3RB#0	20.96	PASS
Band2	1.4MHz	QPSK	18607	3RB#1	22.15	PASS
Band2	1.4MHz	16QAM	18607	3RB#1	21.01	PASS
Band2	1.4MHz	QPSK	18607	3RB#3	22.09	PASS
Band2	1.4MHz	16QAM	18607	3RB#3	20.95	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	21.19	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	20.18	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	22.33	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	21.18	PASS
Band2	1.4MHz	QPSK	18900	1RB#2	22.27	PASS
Band2	1.4MHz	16QAM	18900	1RB#2	21.19	PASS
Band2	1.4MHz	QPSK	18900	1RB#5	22.32	PASS
Band2	1.4MHz	16QAM	18900	1RB#5	21.23	PASS
Band2	1.4MHz	QPSK	18900	3RB#0	22.31	PASS
Band2	1.4MHz	16QAM	18900	3RB#0	21.11	PASS
Band2	1.4MHz	QPSK	18900	3RB#1	22.36	PASS
Band2	1.4MHz	16QAM	18900	3RB#1	21.14	PASS
Band2	1.4MHz	QPSK	18900	3RB#3	22.30	PASS
Band2	1.4MHz	16QAM	18900	3RB#3	21.13	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	21.31	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	21.15	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	22.34	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	21.13	PASS
Band2	1.4MHz	QPSK	19193	1RB#2	22.32	PASS
Band2	1.4MHz	16QAM	19193	1RB#2	21.11	PASS
Band2	1.4MHz	QPSK	19193	1RB#5	22.36	PASS
Band2	1.4MHz	16QAM	19193	1RB#5	21.15	PASS
Band2	1.4MHz	QPSK	19193	3RB#0	22.34	PASS
Band2	1.4MHz	16QAM	19193	3RB#0	21.16	PASS
Band2	1.4MHz	QPSK	19193	3RB#1	22.41	PASS
Band2	1.4MHz	16QAM	19193	3RB#1	21.19	PASS
Band2	1.4MHz	QPSK	19193	3RB#3	22.37	PASS

Band2	1.4MHz	16QAM	19193	3RB#3	21.20	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	21.40	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	21.40	PASS
Band2	3MHz	QPSK	18615	1RB#0	22.29	PASS
Band2	3MHz	16QAM	18615	1RB#0	21.33	PASS
Band2	3MHz	QPSK	18615	1RB#8	22.24	PASS
Band2	3MHz	16QAM	18615	1RB#8	21.23	PASS
Band2	3MHz	QPSK	18615	1RB#14	22.24	PASS
Band2	3MHz	16QAM	18615	1RB#14	21.22	PASS
Band2	3MHz	QPSK	18615	8RB#0	21.29	PASS
Band2	3MHz	16QAM	18615	8RB#0	21.27	PASS
Band2	3MHz	QPSK	18615	8RB#4	21.28	PASS
Band2	3MHz	16QAM	18615	8RB#4	21.27	PASS
Band2	3MHz	QPSK	18615	8RB#7	21.23	PASS
Band2	3MHz	16QAM	18615	8RB#7	21.25	PASS
Band2	3MHz	QPSK	18615	15RB#0	21.24	PASS
Band2	3MHz	16QAM	18615	15RB#0	21.23	PASS
Band2	3MHz	QPSK	18900	1RB#0	22.30	PASS
Band2	3MHz	16QAM	18900	1RB#0	21.26	PASS
Band2	3MHz	QPSK	18900	1RB#8	22.36	PASS
Band2	3MHz	16QAM	18900	1RB#8	21.21	PASS
Band2	3MHz	QPSK	18900	1RB#14	22.40	PASS
Band2	3MHz	16QAM	18900	1RB#14	21.24	PASS
Band2	3MHz	QPSK	18900	8RB#0	21.34	PASS
Band2	3MHz	16QAM	18900	8RB#0	20.34	PASS
Band2	3MHz	QPSK	18900	8RB#4	21.33	PASS
Band2	3MHz	16QAM	18900	8RB#4	21.31	PASS
Band2	3MHz	QPSK	18900	8RB#7	21.35	PASS
Band2	3MHz	16QAM	18900	8RB#7	21.35	PASS
Band2	3MHz	QPSK	18900	15RB#0	21.36	PASS
Band2	3MHz	16QAM	18900	15RB#0	21.23	PASS
Band2	3MHz	QPSK	19185	1RB#0	22.39	PASS
Band2	3MHz	16QAM	19185	1RB#0	21.15	PASS
Band2	3MHz	QPSK	19185	1RB#8	22.36	PASS
Band2	3MHz	16QAM	19185	1RB#8	21.17	PASS
Band2	3MHz	QPSK	19185	1RB#14	22.41	PASS
Band2	3MHz	16QAM	19185	1RB#14	21.25	PASS
Band2	3MHz	QPSK	19185	8RB#0	21.53	PASS
Band2	3MHz	16QAM	19185	8RB#0	21.48	PASS
Band2	3MHz	QPSK	19185	8RB#4	21.50	PASS
Band2	3MHz	16QAM	19185	8RB#4	20.46	PASS
Band2	3MHz	QPSK	19185	8RB#7	21.46	PASS

Band2	3MHz	16QAM	19185	8RB#7	20.46	PASS
Band2	3MHz	QPSK	19185	15RB#0	21.48	PASS
Band2	3MHz	16QAM	19185	15RB#0	21.38	PASS
Band2	5MHz	QPSK	18625	1RB#0	22.49	PASS
Band2	5MHz	16QAM	18625	1RB#0	21.32	PASS
Band2	5MHz	QPSK	18625	1RB#12	22.47	PASS
Band2	5MHz	16QAM	18625	1RB#12	21.25	PASS
Band2	5MHz	QPSK	18625	1RB#24	22.44	PASS
Band2	5MHz	16QAM	18625	1RB#24	21.25	PASS
Band2	5MHz	QPSK	18625	12RB#0	21.31	PASS
Band2	5MHz	16QAM	18625	12RB#0	21.32	PASS
Band2	5MHz	QPSK	18625	12RB#6	21.33	PASS
Band2	5MHz	16QAM	18625	12RB#6	21.35	PASS
Band2	5MHz	QPSK	18625	12RB#13	21.25	PASS
Band2	5MHz	16QAM	18625	12RB#13	21.25	PASS
Band2	5MHz	QPSK	18625	25RB#0	21.33	PASS
Band2	5MHz	16QAM	18625	25RB#0	21.33	PASS
Band2	5MHz	QPSK	18900	1RB#0	22.44	PASS
Band2	5MHz	16QAM	18900	1RB#0	21.46	PASS
Band2	5MHz	QPSK	18900	1RB#12	22.42	PASS
Band2	5MHz	16QAM	18900	1RB#12	21.46	PASS
Band2	5MHz	QPSK	18900	1RB#24	22.45	PASS
Band2	5MHz	16QAM	18900	1RB#24	21.51	PASS
Band2	5MHz	QPSK	18900	12RB#0	21.40	PASS
Band2	5MHz	16QAM	18900	12RB#0	21.42	PASS
Band2	5MHz	QPSK	18900	12RB#6	21.38	PASS
Band2	5MHz	16QAM	18900	12RB#6	21.44	PASS
Band2	5MHz	QPSK	18900	12RB#13	21.38	PASS
Band2	5MHz	16QAM	18900	12RB#13	21.47	PASS
Band2	5MHz	QPSK	18900	25RB#0	21.44	PASS
Band2	5MHz	16QAM	18900	25RB#0	21.38	PASS
Band2	5MHz	QPSK	19175	1RB#0	22.59	PASS
Band2	5MHz	16QAM	19175	1RB#0	21.46	PASS
Band2	5MHz	QPSK	19175	1RB#12	22.62	PASS
Band2	5MHz	16QAM	19175	1RB#12	21.43	PASS
Band2	5MHz	QPSK	19175	1RB#24	22.64	PASS
Band2	5MHz	16QAM	19175	1RB#24	21.48	PASS
Band2	5MHz	QPSK	19175	12RB#0	21.61	PASS
Band2	5MHz	16QAM	19175	12RB#0	21.60	PASS
Band2	5MHz	QPSK	19175	12RB#6	21.57	PASS
Band2	5MHz	16QAM	19175	12RB#6	21.58	PASS
Band2	5MHz	QPSK	19175	12RB#13	21.54	PASS

Band2	5MHz	16QAM	19175	12RB#13	21.55	PASS
Band2	5MHz	QPSK	19175	25RB#0	21.61	PASS
Band2	5MHz	16QAM	19175	25RB#0	21.59	PASS
Band2	10MHz	QPSK	18650	1RB#0	22.43	PASS
Band2	10MHz	16QAM	18650	1RB#0	21.38	PASS
Band2	10MHz	QPSK	18650	1RB#24	22.33	PASS
Band2	10MHz	16QAM	18650	1RB#24	21.30	PASS
Band2	10MHz	QPSK	18650	1RB#49	22.35	PASS
Band2	10MHz	16QAM	18650	1RB#49	21.38	PASS
Band2	10MHz	QPSK	18650	25RB#0	21.42	PASS
Band2	10MHz	16QAM	18650	25RB#0	20.36	PASS
Band2	10MHz	QPSK	18650	25RB#12	21.40	PASS
Band2	10MHz	16QAM	18650	25RB#12	21.35	PASS
Band2	10MHz	QPSK	18650	25RB#25	21.34	PASS
Band2	10MHz	16QAM	18650	25RB#25	21.25	PASS
Band2	10MHz	QPSK	18650	50RB#0	21.40	PASS
Band2	10MHz	16QAM	18650	50RB#0	20.36	PASS
Band2	10MHz	QPSK	18900	1RB#0	22.41	PASS
Band2	10MHz	16QAM	18900	1RB#0	21.31	PASS
Band2	10MHz	QPSK	18900	1RB#24	22.46	PASS
Band2	10MHz	16QAM	18900	1RB#24	21.32	PASS
Band2	10MHz	QPSK	18900	1RB#49	22.46	PASS
Band2	10MHz	16QAM	18900	1RB#49	21.35	PASS
Band2	10MHz	QPSK	18900	25RB#0	21.43	PASS
Band2	10MHz	16QAM	18900	25RB#0	21.42	PASS
Band2	10MHz	QPSK	18900	25RB#12	21.44	PASS
Band2	10MHz	16QAM	18900	25RB#12	21.42	PASS
Band2	10MHz	QPSK	18900	25RB#25	21.47	PASS
Band2	10MHz	16QAM	18900	25RB#25	20.49	PASS
Band2	10MHz	QPSK	18900	50RB#0	21.43	PASS
Band2	10MHz	16QAM	18900	50RB#0	21.40	PASS
Band2	10MHz	QPSK	19150	1RB#0	22.61	PASS
Band2	10MHz	16QAM	19150	1RB#0	21.60	PASS
Band2	10MHz	QPSK	19150	1RB#24	22.56	PASS
Band2	10MHz	16QAM	19150	1RB#24	21.57	PASS
Band2	10MHz	QPSK	19150	1RB#49	22.64	PASS
Band2	10MHz	16QAM	19150	1RB#49	21.61	PASS
Band2	10MHz	QPSK	19150	25RB#0	21.60	PASS
Band2	10MHz	16QAM	19150	25RB#0	21.55	PASS
Band2	10MHz	QPSK	19150	25RB#12	21.58	PASS
Band2	10MHz	16QAM	19150	25RB#12	21.55	PASS
Band2	10MHz	QPSK	19150	25RB#25	21.58	PASS

Band2	10MHz	16QAM	19150	25RB#25	21.54	PASS
Band2	10MHz	QPSK	19150	50RB#0	21.61	PASS
Band2	10MHz	16QAM	19150	50RB#0	20.55	PASS
Band2	15MHz	QPSK	18675	1RB#0	22.46	PASS
Band2	15MHz	16QAM	18675	1RB#0	21.41	PASS
Band2	15MHz	QPSK	18675	1RB#38	22.45	PASS
Band2	15MHz	16QAM	18675	1RB#38	21.40	PASS
Band2	15MHz	QPSK	18675	1RB#74	22.39	PASS
Band2	15MHz	16QAM	18675	1RB#74	21.40	PASS
Band2	15MHz	QPSK	18675	38RB#0	21.38	PASS
Band2	15MHz	16QAM	18675	38RB#0	21.37	PASS
Band2	15MHz	QPSK	18675	38RB#18	21.37	PASS
Band2	15MHz	16QAM	18675	38RB#18	21.40	PASS
Band2	15MHz	QPSK	18675	38RB#37	21.40	PASS
Band2	15MHz	16QAM	18675	38RB#37	21.38	PASS
Band2	15MHz	QPSK	18675	75RB#0	21.40	PASS
Band2	15MHz	16QAM	18675	75RB#0	21.35	PASS
Band2	15MHz	QPSK	18900	1RB#0	22.41	PASS
Band2	15MHz	16QAM	18900	1RB#0	21.55	PASS
Band2	15MHz	QPSK	18900	1RB#38	22.46	PASS
Band2	15MHz	16QAM	18900	1RB#38	21.60	PASS
Band2	15MHz	QPSK	18900	1RB#74	22.40	PASS
Band2	15MHz	16QAM	18900	1RB#74	21.54	PASS
Band2	15MHz	QPSK	18900	38RB#0	21.45	PASS
Band2	15MHz	16QAM	18900	38RB#0	21.46	PASS
Band2	15MHz	QPSK	18900	38RB#18	21.45	PASS
Band2	15MHz	16QAM	18900	38RB#18	21.45	PASS
Band2	15MHz	QPSK	18900	38RB#37	21.45	PASS
Band2	15MHz	16QAM	18900	38RB#37	21.45	PASS
Band2	15MHz	QPSK	18900	75RB#0	21.45	PASS
Band2	15MHz	16QAM	18900	75RB#0	21.47	PASS
Band2	15MHz	QPSK	19125	1RB#0	22.69	PASS
Band2	15MHz	16QAM	19125	1RB#0	21.67	PASS
Band2	15MHz	QPSK	19125	1RB#38	22.74	PASS
Band2	15MHz	16QAM	19125	1RB#38	21.68	PASS
Band2	15MHz	QPSK	19125	1RB#74	22.69	PASS
Band2	15MHz	16QAM	19125	1RB#74	21.71	PASS
Band2	15MHz	QPSK	19125	38RB#0	21.65	PASS
Band2	15MHz	16QAM	19125	38RB#0	21.65	PASS
Band2	15MHz	QPSK	19125	38RB#18	21.65	PASS
Band2	15MHz	16QAM	19125	38RB#18	21.65	PASS
Band2	15MHz	QPSK	19125	38RB#37	21.65	PASS

Band2	15MHz	16QAM	19125	38RB#37	21.67	PASS
Band2	15MHz	QPSK	19125	75RB#0	21.65	PASS
Band2	15MHz	16QAM	19125	75RB#0	20.62	PASS
Band2	20MHz	QPSK	18700	1RB#0	22.53	PASS
Band2	20MHz	16QAM	18700	1RB#0	21.41	PASS
Band2	20MHz	QPSK	18700	1RB#49	22.48	PASS
Band2	20MHz	16QAM	18700	1RB#49	21.42	PASS
Band2	20MHz	QPSK	18700	1RB#99	22.56	PASS
Band2	20MHz	16QAM	18700	1RB#99	21.43	PASS
Band2	20MHz	QPSK	18700	50RB#0	21.53	PASS
Band2	20MHz	16QAM	18700	50RB#0	21.52	PASS
Band2	20MHz	QPSK	18700	50RB#25	21.52	PASS
Band2	20MHz	16QAM	18700	50RB#25	20.53	PASS
Band2	20MHz	QPSK	18700	50RB#50	21.46	PASS
Band2	20MHz	16QAM	18700	50RB#50	21.44	PASS
Band2	20MHz	QPSK	18700	100RB#0	21.52	PASS
Band2	20MHz	16QAM	18700	100RB#0	21.48	PASS
Band2	20MHz	QPSK	18900	1RB#0	22.53	PASS
Band2	20MHz	16QAM	18900	1RB#0	21.72	PASS
Band2	20MHz	QPSK	18900	1RB#49	22.61	PASS
Band2	20MHz	16QAM	18900	1RB#49	21.75	PASS
Band2	20MHz	QPSK	18900	1RB#99	22.51	PASS
Band2	20MHz	16QAM	18900	1RB#99	21.77	PASS
Band2	20MHz	QPSK	18900	50RB#0	21.49	PASS
Band2	20MHz	16QAM	18900	50RB#0	21.49	PASS
Band2	20MHz	QPSK	18900	50RB#25	21.48	PASS
Band2	20MHz	16QAM	18900	50RB#25	21.47	PASS
Band2	20MHz	QPSK	18900	50RB#50	21.51	PASS
Band2	20MHz	16QAM	18900	50RB#50	21.50	PASS
Band2	20MHz	QPSK	18900	100RB#0	21.50	PASS
Band2	20MHz	16QAM	18900	100RB#0	21.48	PASS
Band2	20MHz	QPSK	19100	1RB#0	22.70	PASS
Band2	20MHz	16QAM	19100	1RB#0	21.59	PASS
Band2	20MHz	QPSK	19100	1RB#49	22.84	PASS
Band2	20MHz	16QAM	19100	1RB#49	21.67	PASS
Band2	20MHz	QPSK	19100	1RB#99	22.78	PASS
Band2	20MHz	16QAM	19100	1RB#99	21.62	PASS
Band2	20MHz	QPSK	19100	50RB#0	21.68	PASS
Band2	20MHz	16QAM	19100	50RB#0	21.66	PASS
Band2	20MHz	QPSK	19100	50RB#25	21.68	PASS
Band2	20MHz	16QAM	19100	50RB#25	21.67	PASS
Band2	20MHz	QPSK	19100	50RB#50	21.70	PASS

Band2	20MHz	16QAM	19100	50RB#50	21.69	PASS
Band2	20MHz	QPSK	19100	100RB#0	21.71	PASS
Band2	20MHz	16QAM	19100	100RB#0	21.68	PASS

LTE(P4): Sensor ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	21.15	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	20.06	PASS
Band2	1.4MHz	QPSK	18607	1RB#2	21.02	PASS
Band2	1.4MHz	16QAM	18607	1RB#2	20.04	PASS
Band2	1.4MHz	QPSK	18607	1RB#5	21.12	PASS
Band2	1.4MHz	16QAM	18607	1RB#5	20.05	PASS
Band2	1.4MHz	QPSK	18607	3RB#0	21.16	PASS
Band2	1.4MHz	16QAM	18607	3RB#0	20.98	PASS
Band2	1.4MHz	QPSK	18607	3RB#1	21.17	PASS
Band2	1.4MHz	16QAM	18607	3RB#1	20.02	PASS
Band2	1.4MHz	QPSK	18607	3RB#3	21.02	PASS
Band2	1.4MHz	16QAM	18607	3RB#3	20.93	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	20.15	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	20.14	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	21.35	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	20.16	PASS
Band2	1.4MHz	QPSK	18900	1RB#2	20.23	PASS
Band2	1.4MHz	16QAM	18900	1RB#2	20.12	PASS
Band2	1.4MHz	QPSK	18900	1RB#5	20.35	PASS
Band2	1.4MHz	16QAM	18900	1RB#5	20.24	PASS
Band2	1.4MHz	QPSK	18900	3RB#0	20.35	PASS
Band2	1.4MHz	16QAM	18900	3RB#0	20.16	PASS
Band2	1.4MHz	QPSK	18900	3RB#1	21.35	PASS
Band2	1.4MHz	16QAM	18900	3RB#1	20.12	PASS
Band2	1.4MHz	QPSK	18900	3RB#3	21.33	PASS
Band2	1.4MHz	16QAM	18900	3RB#3	20.15	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	20.34	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	20.14	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	20.35	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	20.16	PASS
Band2	1.4MHz	QPSK	19193	1RB#2	21.30	PASS
Band2	1.4MHz	16QAM	19193	1RB#2	20.11	PASS
Band2	1.4MHz	QPSK	19193	1RB#5	21.32	PASS
Band2	1.4MHz	16QAM	19193	1RB#5	20.13	PASS
Band2	1.4MHz	QPSK	19193	3RB#0	21.35	PASS

Band2	1.4MHz	16QAM	19193	3RB#0	20.16	PASS
Band2	1.4MHz	QPSK	19193	3RB#1	21.41	PASS
Band2	1.4MHz	16QAM	19193	3RB#1	20.12	PASS
Band2	1.4MHz	QPSK	19193	3RB#3	21.26	PASS
Band2	1.4MHz	16QAM	19193	3RB#3	20.15	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	20.35	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	20.31	PASS
Band2	3MHz	QPSK	18615	1RB#0	21.21	PASS
Band2	3MHz	16QAM	18615	1RB#0	20.32	PASS
Band2	3MHz	QPSK	18615	1RB#8	21.23	PASS
Band2	3MHz	16QAM	18615	1RB#8	20.14	PASS
Band2	3MHz	QPSK	18615	1RB#14	21.25	PASS
Band2	3MHz	16QAM	18615	1RB#14	20.08	PASS
Band2	3MHz	QPSK	18615	8RB#0	20.41	PASS
Band2	3MHz	16QAM	18615	8RB#0	20.25	PASS
Band2	3MHz	QPSK	18615	8RB#4	20.36	PASS
Band2	3MHz	16QAM	18615	8RB#4	20.45	PASS
Band2	3MHz	QPSK	18615	8RB#7	20.23	PASS
Band2	3MHz	16QAM	18615	8RB#7	20.36	PASS
Band2	3MHz	QPSK	18615	15RB#0	20.24	PASS
Band2	3MHz	16QAM	18615	15RB#0	20.28	PASS
Band2	3MHz	QPSK	18900	1RB#0	21.34	PASS
Band2	3MHz	16QAM	18900	1RB#0	20.28	PASS
Band2	3MHz	QPSK	18900	1RB#8	21.34	PASS
Band2	3MHz	16QAM	18900	1RB#8	20.25	PASS
Band2	3MHz	QPSK	18900	1RB#14	21.36	PASS
Band2	3MHz	16QAM	18900	1RB#14	20.54	PASS
Band2	3MHz	QPSK	18900	8RB#0	20.21	PASS
Band2	3MHz	16QAM	18900	8RB#0	20.25	PASS
Band2	3MHz	QPSK	18900	8RB#4	20.30	PASS
Band2	3MHz	16QAM	18900	8RB#4	20.28	PASS
Band2	3MHz	QPSK	18900	8RB#7	20.45	PASS
Band2	3MHz	16QAM	18900	8RB#7	20.24	PASS
Band2	3MHz	QPSK	18900	15RB#0	20.32	PASS
Band2	3MHz	16QAM	18900	15RB#0	20.24	PASS
Band2	3MHz	QPSK	19185	1RB#0	21.24	PASS
Band2	3MHz	16QAM	19185	1RB#0	20.26	PASS
Band2	3MHz	QPSK	19185	1RB#8	21.26	PASS
Band2	3MHz	16QAM	19185	1RB#8	20.25	PASS
Band2	3MHz	QPSK	19185	1RB#14	21.45	PASS
Band2	3MHz	16QAM	19185	1RB#14	20.25	PASS
Band2	3MHz	QPSK	19185	8RB#0	20.36	PASS

Band2	3MHz	16QAM	19185	8RB#0	20.54	PASS
Band2	3MHz	QPSK	19185	8RB#4	20.28	PASS
Band2	3MHz	16QAM	19185	8RB#4	20.45	PASS
Band2	3MHz	QPSK	19185	8RB#7	20.25	PASS
Band2	3MHz	16QAM	19185	8RB#7	20.36	PASS
Band2	3MHz	QPSK	19185	15RB#0	20.54	PASS
Band2	3MHz	16QAM	19185	15RB#0	20.25	PASS
Band2	5MHz	QPSK	18625	1RB#0	21.24	PASS
Band2	5MHz	16QAM	18625	1RB#0	20.35	PASS
Band2	5MHz	QPSK	18625	1RB#12	21.24	PASS
Band2	5MHz	16QAM	18625	1RB#12	20.25	PASS
Band2	5MHz	QPSK	18625	1RB#24	21.15	PASS
Band2	5MHz	16QAM	18625	1RB#24	20.36	PASS
Band2	5MHz	QPSK	18625	12RB#0	20.28	PASS
Band2	5MHz	16QAM	18625	12RB#0	20.42	PASS
Band2	5MHz	QPSK	18625	12RB#6	20.31	PASS
Band2	5MHz	16QAM	18625	12RB#6	20.26	PASS
Band2	5MHz	QPSK	18625	12RB#13	20.25	PASS
Band2	5MHz	16QAM	18625	12RB#13	20.36	PASS
Band2	5MHz	QPSK	18625	25RB#0	20.41	PASS
Band2	5MHz	16QAM	18625	25RB#0	20.25	PASS
Band2	5MHz	QPSK	18900	1RB#0	21.34	PASS
Band2	5MHz	16QAM	18900	1RB#0	20.28	PASS
Band2	5MHz	QPSK	18900	1RB#12	21.45	PASS
Band2	5MHz	16QAM	18900	1RB#12	20.32	PASS
Band2	5MHz	QPSK	18900	1RB#24	21.42	PASS
Band2	5MHz	16QAM	18900	1RB#24	20.36	PASS
Band2	5MHz	QPSK	18900	12RB#0	20.54	PASS
Band2	5MHz	16QAM	18900	12RB#0	20.45	PASS
Band2	5MHz	QPSK	18900	12RB#6	20.36	PASS
Band2	5MHz	16QAM	18900	12RB#6	20.54	PASS
Band2	5MHz	QPSK	18900	12RB#13	20.25	PASS
Band2	5MHz	16QAM	18900	12RB#13	20.35	PASS
Band2	5MHz	QPSK	18900	25RB#0	20.34	PASS
Band2	5MHz	16QAM	18900	25RB#0	20.37	PASS
Band2	5MHz	QPSK	19175	1RB#0	21.46	PASS
Band2	5MHz	16QAM	19175	1RB#0	20.36	PASS
Band2	5MHz	QPSK	19175	1RB#12	21.45	PASS
Band2	5MHz	16QAM	19175	1RB#12	20.36	PASS
Band2	5MHz	QPSK	19175	1RB#24	21.54	PASS
Band2	5MHz	16QAM	19175	1RB#24	20.25	PASS
Band2	5MHz	QPSK	19175	12RB#0	20.45	PASS

Band2	5MHz	16QAM	19175	12RB#0	20.25	PASS
Band2	5MHz	QPSK	19175	12RB#6	20.36	PASS
Band2	5MHz	16QAM	19175	12RB#6	20.54	PASS
Band2	5MHz	QPSK	19175	12RB#13	20.54	PASS
Band2	5MHz	16QAM	19175	12RB#13	20.57	PASS
Band2	5MHz	QPSK	19175	25RB#0	20.56	PASS
Band2	5MHz	16QAM	19175	25RB#0	20.58	PASS
Band2	10MHz	QPSK	18650	1RB#0	21.42	PASS
Band2	10MHz	16QAM	18650	1RB#0	20.36	PASS
Band2	10MHz	QPSK	18650	1RB#24	21.25	PASS
Band2	10MHz	16QAM	18650	1RB#24	20.45	PASS
Band2	10MHz	QPSK	18650	1RB#49	21.25	PASS
Band2	10MHz	16QAM	18650	1RB#49	20.36	PASS
Band2	10MHz	QPSK	18650	25RB#0	20.57	PASS
Band2	10MHz	16QAM	18650	25RB#0	20.54	PASS
Band2	10MHz	QPSK	18650	25RB#12	20.21	PASS
Band2	10MHz	16QAM	18650	25RB#12	20.25	PASS
Band2	10MHz	QPSK	18650	25RB#25	20.36	PASS
Band2	10MHz	16QAM	18650	25RB#25	20.54	PASS
Band2	10MHz	QPSK	18650	50RB#0	20.74	PASS
Band2	10MHz	16QAM	18650	50RB#0	20.32	PASS
Band2	10MHz	QPSK	18900	1RB#0	21.25	PASS
Band2	10MHz	16QAM	18900	1RB#0	20.25	PASS
Band2	10MHz	QPSK	18900	1RB#24	21.36	PASS
Band2	10MHz	16QAM	18900	1RB#24	20.54	PASS
Band2	10MHz	QPSK	18900	1RB#49	21.57	PASS
Band2	10MHz	16QAM	18900	1RB#49	20.56	PASS
Band2	10MHz	QPSK	18900	25RB#0	20.24	PASS
Band2	10MHz	16QAM	18900	25RB#0	20.25	PASS
Band2	10MHz	QPSK	18900	25RB#12	20.64	PASS
Band2	10MHz	16QAM	18900	25RB#12	20.57	PASS
Band2	10MHz	QPSK	18900	25RB#25	20.46	PASS
Band2	10MHz	16QAM	18900	25RB#25	20.25	PASS
Band2	10MHz	QPSK	18900	50RB#0	20.36	PASS
Band2	10MHz	16QAM	18900	50RB#0	20.56	PASS
Band2	10MHz	QPSK	19150	1RB#0	21.35	PASS
Band2	10MHz	16QAM	19150	1RB#0	20.36	PASS
Band2	10MHz	QPSK	19150	1RB#24	21.45	PASS
Band2	10MHz	16QAM	19150	1RB#24	20.36	PASS
Band2	10MHz	QPSK	19150	1RB#49	21.54	PASS
Band2	10MHz	16QAM	19150	1RB#49	20.12	PASS
Band2	10MHz	QPSK	19150	25RB#0	20.25	PASS

Band2	10MHz	16QAM	19150	25RB#0	20.36	PASS
Band2	10MHz	QPSK	19150	25RB#12	20.54	PASS
Band2	10MHz	16QAM	19150	25RB#12	20.25	PASS
Band2	10MHz	QPSK	19150	25RB#25	20.36	PASS
Band2	10MHz	16QAM	19150	25RB#25	20.54	PASS
Band2	10MHz	QPSK	19150	50RB#0	20.45	PASS
Band2	10MHz	16QAM	19150	50RB#0	20.25	PASS
Band2	15MHz	QPSK	18675	1RB#0	21.36	PASS
Band2	15MHz	16QAM	18675	1RB#0	20.54	PASS
Band2	15MHz	QPSK	18675	1RB#38	20.24	PASS
Band2	15MHz	16QAM	18675	1RB#38	20.24	PASS
Band2	15MHz	QPSK	18675	1RB#74	21.35	PASS
Band2	15MHz	16QAM	18675	1RB#74	20.24	PASS
Band2	15MHz	QPSK	18675	38RB#0	20.28	PASS
Band2	15MHz	16QAM	18675	38RB#0	20.42	PASS
Band2	15MHz	QPSK	18675	38RB#18	20.36	PASS
Band2	15MHz	16QAM	18675	38RB#18	20.54	PASS
Band2	15MHz	QPSK	18675	38RB#37	20.25	PASS
Band2	15MHz	16QAM	18675	38RB#37	20.37	PASS
Band2	15MHz	QPSK	18675	75RB#0	20.42	PASS
Band2	15MHz	16QAM	18675	75RB#0	20.29	PASS
Band2	15MHz	QPSK	18900	1RB#0	21.25	PASS
Band2	15MHz	16QAM	18900	1RB#0	20.36	PASS
Band2	15MHz	QPSK	18900	1RB#38	21.45	PASS
Band2	15MHz	16QAM	18900	1RB#38	20.45	PASS
Band2	15MHz	QPSK	18900	1RB#74	21.23	PASS
Band2	15MHz	16QAM	18900	1RB#74	20.25	PASS
Band2	15MHz	QPSK	18900	38RB#0	20.64	PASS
Band2	15MHz	16QAM	18900	38RB#0	20.25	PASS
Band2	15MHz	QPSK	18900	38RB#18	20.45	PASS
Band2	15MHz	16QAM	18900	38RB#18	20.36	PASS
Band2	15MHz	QPSK	18900	38RB#37	20.54	PASS
Band2	15MHz	16QAM	18900	38RB#37	20.12	PASS
Band2	15MHz	QPSK	18900	75RB#0	20.25	PASS
Band2	15MHz	16QAM	18900	75RB#0	20.55	PASS
Band2	15MHz	QPSK	19125	1RB#0	21.12	PASS
Band2	15MHz	16QAM	19125	1RB#0	20.36	PASS
Band2	15MHz	QPSK	19125	1RB#38	21.75	PASS
Band2	15MHz	16QAM	19125	1RB#38	20.63	PASS
Band2	15MHz	QPSK	19125	1RB#74	21.66	PASS
Band2	15MHz	16QAM	19125	1RB#74	20.75	PASS
Band2	15MHz	QPSK	19125	38RB#0	20.67	PASS

Band2	15MHz	16QAM	19125	38RB#0	20.68	PASS
Band2	15MHz	QPSK	19125	38RB#18	20.69	PASS
Band2	15MHz	16QAM	19125	38RB#18	20.68	PASS
Band2	15MHz	QPSK	19125	38RB#37	20.62	PASS
Band2	15MHz	16QAM	19125	38RB#37	20.63	PASS
Band2	15MHz	QPSK	19125	75RB#0	20.62	PASS
Band2	15MHz	16QAM	19125	75RB#0	20.64	PASS
Band2	20MHz	QPSK	18700	1RB#0	21.52	PASS
Band2	20MHz	16QAM	18700	1RB#0	20.43	PASS
Band2	20MHz	QPSK	18700	1RB#49	21.45	PASS
Band2	20MHz	16QAM	18700	1RB#49	20.44	PASS
Band2	20MHz	QPSK	18700	1RB#99	21.55	PASS
Band2	20MHz	16QAM	18700	1RB#99	20.44	PASS
Band2	20MHz	QPSK	18700	50RB#0	20.52	PASS
Band2	20MHz	16QAM	18700	50RB#0	20.51	PASS
Band2	20MHz	QPSK	18700	50RB#25	20.51	PASS
Band2	20MHz	16QAM	18700	50RB#25	20.50	PASS
Band2	20MHz	QPSK	18700	50RB#50	20.48	PASS
Band2	20MHz	16QAM	18700	50RB#50	20.42	PASS
Band2	20MHz	QPSK	18700	100RB#0	20.12	PASS
Band2	20MHz	16QAM	18700	100RB#0	20.25	PASS
Band2	20MHz	QPSK	18900	1RB#0	21.65	PASS
Band2	20MHz	16QAM	18900	1RB#0	20.45	PASS
Band2	20MHz	QPSK	18900	1RB#49	21.25	PASS
Band2	20MHz	16QAM	18900	1RB#49	20.36	PASS
Band2	20MHz	QPSK	18900	1RB#99	21.24	PASS
Band2	20MHz	16QAM	18900	1RB#99	20.71	PASS
Band2	20MHz	QPSK	18900	50RB#0	20.52	PASS
Band2	20MHz	16QAM	18900	50RB#0	20.36	PASS
Band2	20MHz	QPSK	18900	50RB#25	20.36	PASS
Band2	20MHz	16QAM	18900	50RB#25	20.54	PASS
Band2	20MHz	QPSK	18900	50RB#50	20.28	PASS
Band2	20MHz	16QAM	18900	50RB#50	20.45	PASS
Band2	20MHz	QPSK	18900	100RB#0	20.36	PASS
Band2	20MHz	16QAM	18900	100RB#0	20.54	PASS
Band2	20MHz	QPSK	19100	1RB#0	21.25	PASS
Band2	20MHz	16QAM	19100	1RB#0	20.36	PASS
Band2	20MHz	QPSK	19100	1RB#49	21.54	PASS
Band2	20MHz	16QAM	19100	1RB#49	20.36	PASS
Band2	20MHz	QPSK	19100	1RB#99	21.54	PASS
Band2	20MHz	16QAM	19100	1RB#99	20.52	PASS
Band2	20MHz	QPSK	19100	50RB#0	20.65	PASS

Band2	20MHz	16QAM	19100	50RB#0	20.57	PASS
Band2	20MHz	QPSK	19100	50RB#25	20.67	PASS
Band2	20MHz	16QAM	19100	50RB#25	20.75	PASS
Band2	20MHz	QPSK	19100	50RB#50	20.76	PASS
Band2	20MHz	16QAM	19100	50RB#50	20.54	PASS
Band2	20MHz	QPSK	19100	100RB#0	20.65	PASS
Band2	20MHz	16QAM	19100	100RB#0	20.75	PASS

LTE(P3): Hotspot ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	20.56	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	19.95	PASS
Band2	1.4MHz	QPSK	18607	1RB#2	20.00	PASS
Band2	1.4MHz	16QAM	18607	1RB#2	19.93	PASS
Band2	1.4MHz	QPSK	18607	1RB#5	19.99	PASS
Band2	1.4MHz	16QAM	18607	1RB#5	19.90	PASS
Band2	1.4MHz	QPSK	18607	3RB#0	19.97	PASS
Band2	1.4MHz	16QAM	18607	3RB#0	19.82	PASS
Band2	1.4MHz	QPSK	18607	3RB#1	19.99	PASS
Band2	1.4MHz	16QAM	18607	3RB#1	19.80	PASS
Band2	1.4MHz	QPSK	18607	3RB#3	19.97	PASS
Band2	1.4MHz	16QAM	18607	3RB#3	19.79	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	20.06	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	20.03	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	20.17	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	19.89	PASS
Band2	1.4MHz	QPSK	18900	1RB#2	20.12	PASS
Band2	1.4MHz	16QAM	18900	1RB#2	19.93	PASS
Band2	1.4MHz	QPSK	18900	1RB#5	20.19	PASS
Band2	1.4MHz	16QAM	18900	1RB#5	19.90	PASS
Band2	1.4MHz	QPSK	18900	3RB#0	20.14	PASS
Band2	1.4MHz	16QAM	18900	3RB#0	19.97	PASS
Band2	1.4MHz	QPSK	18900	3RB#1	20.13	PASS
Band2	1.4MHz	16QAM	18900	3RB#1	19.93	PASS
Band2	1.4MHz	QPSK	18900	3RB#3	20.12	PASS
Band2	1.4MHz	16QAM	18900	3RB#3	19.92	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	20.15	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	20.11	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	20.31	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	20.26	PASS
Band2	1.4MHz	QPSK	19193	1RB#2	20.28	PASS

Band2	1.4MHz	16QAM	19193	1RB#2	20.22	PASS
Band2	1.4MHz	QPSK	19193	1RB#5	20.29	PASS
Band2	1.4MHz	16QAM	19193	1RB#5	20.24	PASS
Band2	1.4MHz	QPSK	19193	3RB#0	20.31	PASS
Band2	1.4MHz	16QAM	19193	3RB#0	20.15	PASS
Band2	1.4MHz	QPSK	19193	3RB#1	20.30	PASS
Band2	1.4MHz	16QAM	19193	3RB#1	20.13	PASS
Band2	1.4MHz	QPSK	19193	3RB#3	20.28	PASS
Band2	1.4MHz	16QAM	19193	3RB#3	20.15	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	20.39	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	20.39	PASS
Band2	3MHz	QPSK	18615	1RB#0	20.13	PASS
Band2	3MHz	16QAM	18615	1RB#0	20.08	PASS
Band2	3MHz	QPSK	18615	1RB#8	20.07	PASS
Band2	3MHz	16QAM	18615	1RB#8	20.02	PASS
Band2	3MHz	QPSK	18615	1RB#14	20.09	PASS
Band2	3MHz	16QAM	18615	1RB#14	20.02	PASS
Band2	3MHz	QPSK	18615	8RB#0	20.10	PASS
Band2	3MHz	16QAM	18615	8RB#0	20.12	PASS
Band2	3MHz	QPSK	18615	8RB#4	20.09	PASS
Band2	3MHz	16QAM	18615	8RB#4	20.12	PASS
Band2	3MHz	QPSK	18615	8RB#7	20.04	PASS
Band2	3MHz	16QAM	18615	8RB#7	20.08	PASS
Band2	3MHz	QPSK	18615	15RB#0	20.08	PASS
Band2	3MHz	16QAM	18615	15RB#0	20.06	PASS
Band2	3MHz	QPSK	18900	1RB#0	20.17	PASS
Band2	3MHz	16QAM	18900	1RB#0	20.06	PASS
Band2	3MHz	QPSK	18900	1RB#8	20.19	PASS
Band2	3MHz	16QAM	18900	1RB#8	20.02	PASS
Band2	3MHz	QPSK	18900	1RB#14	20.23	PASS
Band2	3MHz	16QAM	18900	1RB#14	20.06	PASS
Band2	3MHz	QPSK	18900	8RB#0	20.15	PASS
Band2	3MHz	16QAM	18900	8RB#0	20.10	PASS
Band2	3MHz	QPSK	18900	8RB#4	20.20	PASS
Band2	3MHz	16QAM	18900	8RB#4	20.12	PASS
Band2	3MHz	QPSK	18900	8RB#7	20.18	PASS
Band2	3MHz	16QAM	18900	8RB#7	20.14	PASS
Band2	3MHz	QPSK	18900	15RB#0	20.19	PASS
Band2	3MHz	16QAM	18900	15RB#0	20.06	PASS
Band2	3MHz	QPSK	19185	1RB#0	20.26	PASS
Band2	3MHz	16QAM	19185	1RB#0	20.09	PASS
Band2	3MHz	QPSK	19185	1RB#8	20.28	PASS

Band2	3MHz	16QAM	19185	1RB#8	20.08	PASS
Band2	3MHz	QPSK	19185	1RB#14	20.35	PASS
Band2	3MHz	16QAM	19185	1RB#14	20.15	PASS
Band2	3MHz	QPSK	19185	8RB#0	20.42	PASS
Band2	3MHz	16QAM	19185	8RB#0	20.38	PASS
Band2	3MHz	QPSK	19185	8RB#4	20.40	PASS
Band2	3MHz	16QAM	19185	8RB#4	20.38	PASS
Band2	3MHz	QPSK	19185	8RB#7	20.41	PASS
Band2	3MHz	16QAM	19185	8RB#7	20.40	PASS
Band2	3MHz	QPSK	19185	15RB#0	20.38	PASS
Band2	3MHz	16QAM	19185	15RB#0	20.30	PASS
Band2	5MHz	QPSK	18625	1RB#0	20.36	PASS
Band2	5MHz	16QAM	18625	1RB#0	20.20	PASS
Band2	5MHz	QPSK	18625	1RB#12	20.27	PASS
Band2	5MHz	16QAM	18625	1RB#12	20.08	PASS
Band2	5MHz	QPSK	18625	1RB#24	20.28	PASS
Band2	5MHz	16QAM	18625	1RB#24	20.11	PASS
Band2	5MHz	QPSK	18625	12RB#0	20.19	PASS
Band2	5MHz	16QAM	18625	12RB#0	20.17	PASS
Band2	5MHz	QPSK	18625	12RB#6	20.19	PASS
Band2	5MHz	16QAM	18625	12RB#6	20.16	PASS
Band2	5MHz	QPSK	18625	12RB#13	20.10	PASS
Band2	5MHz	16QAM	18625	12RB#13	20.10	PASS
Band2	5MHz	QPSK	18625	25RB#0	20.19	PASS
Band2	5MHz	16QAM	18625	25RB#0	20.18	PASS
Band2	5MHz	QPSK	18900	1RB#0	20.27	PASS
Band2	5MHz	16QAM	18900	1RB#0	20.28	PASS
Band2	5MHz	QPSK	18900	1RB#12	20.33	PASS
Band2	5MHz	16QAM	18900	1RB#12	20.32	PASS
Band2	5MHz	QPSK	18900	1RB#24	20.37	PASS
Band2	5MHz	16QAM	18900	1RB#24	20.35	PASS
Band2	5MHz	QPSK	18900	12RB#0	20.23	PASS
Band2	5MHz	16QAM	18900	12RB#0	20.30	PASS
Band2	5MHz	QPSK	18900	12RB#6	20.25	PASS
Band2	5MHz	16QAM	18900	12RB#6	20.31	PASS
Band2	5MHz	QPSK	18900	12RB#13	20.27	PASS
Band2	5MHz	16QAM	18900	12RB#13	20.33	PASS
Band2	5MHz	QPSK	18900	25RB#0	20.28	PASS
Band2	5MHz	16QAM	18900	25RB#0	20.25	PASS
Band2	5MHz	QPSK	19175	1RB#0	20.47	PASS
Band2	5MHz	16QAM	19175	1RB#0	20.34	PASS
Band2	5MHz	QPSK	19175	1RB#12	20.51	PASS

Band2	5MHz	16QAM	19175	1RB#12	20.30	PASS
Band2	5MHz	QPSK	19175	1RB#24	20.34	PASS
Band2	5MHz	16QAM	19175	1RB#24	20.45	PASS
Band2	5MHz	QPSK	19175	12RB#0	20.48	PASS
Band2	5MHz	16QAM	19175	12RB#0	20.50	PASS
Band2	5MHz	QPSK	19175	12RB#6	20.47	PASS
Band2	5MHz	16QAM	19175	12RB#6	20.49	PASS
Band2	5MHz	QPSK	19175	12RB#13	20.50	PASS
Band2	5MHz	16QAM	19175	12RB#13	20.50	PASS
Band2	5MHz	QPSK	19175	25RB#0	20.52	PASS
Band2	5MHz	16QAM	19175	25RB#0	20.52	PASS
Band2	10MHz	QPSK	18650	1RB#0	20.33	PASS
Band2	10MHz	16QAM	18650	1RB#0	20.31	PASS
Band2	10MHz	QPSK	18650	1RB#24	20.17	PASS
Band2	10MHz	16QAM	18650	1RB#24	20.16	PASS
Band2	10MHz	QPSK	18650	1RB#49	20.22	PASS
Band2	10MHz	16QAM	18650	1RB#49	20.21	PASS
Band2	10MHz	QPSK	18650	25RB#0	20.28	PASS
Band2	10MHz	16QAM	18650	25RB#0	20.21	PASS
Band2	10MHz	QPSK	18650	25RB#12	20.28	PASS
Band2	10MHz	16QAM	18650	25RB#12	20.19	PASS
Band2	10MHz	QPSK	18650	25RB#25	20.17	PASS
Band2	10MHz	16QAM	18650	25RB#25	20.09	PASS
Band2	10MHz	QPSK	18650	50RB#0	20.26	PASS
Band2	10MHz	16QAM	18650	50RB#0	20.17	PASS
Band2	10MHz	QPSK	18900	1RB#0	20.28	PASS
Band2	10MHz	16QAM	18900	1RB#0	20.17	PASS
Band2	10MHz	QPSK	18900	1RB#24	20.31	PASS
Band2	10MHz	16QAM	18900	1RB#24	20.17	PASS
Band2	10MHz	QPSK	18900	1RB#49	20.34	PASS
Band2	10MHz	16QAM	18900	1RB#49	20.24	PASS
Band2	10MHz	QPSK	18900	25RB#0	20.29	PASS
Band2	10MHz	16QAM	18900	25RB#0	20.27	PASS
Band2	10MHz	QPSK	18900	25RB#12	20.30	PASS
Band2	10MHz	16QAM	18900	25RB#12	20.24	PASS
Band2	10MHz	QPSK	18900	25RB#25	20.32	PASS
Band2	10MHz	16QAM	18900	25RB#25	20.32	PASS
Band2	10MHz	QPSK	18900	50RB#0	20.29	PASS
Band2	10MHz	16QAM	18900	50RB#0	20.26	PASS
Band2	10MHz	QPSK	19150	1RB#0	20.50	PASS
Band2	10MHz	16QAM	19150	1RB#0	20.45	PASS
Band2	10MHz	QPSK	19150	1RB#24	20.51	PASS

Band2	10MHz	16QAM	19150	1RB#24	20.52	PASS
Band2	10MHz	QPSK	19150	1RB#49	20.61	PASS
Band2	10MHz	16QAM	19150	1RB#49	20.57	PASS
Band2	10MHz	QPSK	19150	25RB#0	20.48	PASS
Band2	10MHz	16QAM	19150	25RB#0	20.43	PASS
Band2	10MHz	QPSK	19150	25RB#12	20.43	PASS
Band2	10MHz	16QAM	19150	25RB#12	20.39	PASS
Band2	10MHz	QPSK	19150	25RB#25	20.50	PASS
Band2	10MHz	16QAM	19150	25RB#25	20.43	PASS
Band2	10MHz	QPSK	19150	50RB#0	20.45	PASS
Band2	10MHz	16QAM	19150	50RB#0	20.39	PASS
Band2	15MHz	QPSK	18675	1RB#0	20.31	PASS
Band2	15MHz	16QAM	18675	1RB#0	20.29	PASS
Band2	15MHz	QPSK	18675	1RB#38	20.23	PASS
Band2	15MHz	16QAM	18675	1RB#38	20.22	PASS
Band2	15MHz	QPSK	18675	1RB#74	20.12	PASS
Band2	15MHz	16QAM	18675	1RB#74	20.11	PASS
Band2	15MHz	QPSK	18675	38RB#0	20.21	PASS
Band2	15MHz	16QAM	18675	38RB#0	20.18	PASS
Band2	15MHz	QPSK	18675	38RB#18	20.19	PASS
Band2	15MHz	16QAM	18675	38RB#18	20.19	PASS
Band2	15MHz	QPSK	18675	38RB#37	20.19	PASS
Band2	15MHz	16QAM	18675	38RB#37	20.19	PASS
Band2	15MHz	QPSK	18675	75RB#0	20.19	PASS
Band2	15MHz	16QAM	18675	75RB#0	20.15	PASS
Band2	15MHz	QPSK	18900	1RB#0	20.24	PASS
Band2	15MHz	16QAM	18900	1RB#0	20.38	PASS
Band2	15MHz	QPSK	18900	1RB#38	20.32	PASS
Band2	15MHz	16QAM	18900	1RB#38	20.45	PASS
Band2	15MHz	QPSK	18900	1RB#74	20.29	PASS
Band2	15MHz	16QAM	18900	1RB#74	20.43	PASS
Band2	15MHz	QPSK	18900	38RB#0	20.29	PASS
Band2	15MHz	16QAM	18900	38RB#0	20.29	PASS
Band2	15MHz	QPSK	18900	38RB#18	20.29	PASS
Band2	15MHz	16QAM	18900	38RB#18	20.29	PASS
Band2	15MHz	QPSK	18900	38RB#37	20.29	PASS
Band2	15MHz	16QAM	18900	38RB#37	20.29	PASS
Band2	15MHz	QPSK	18900	75RB#0	20.29	PASS
Band2	15MHz	16QAM	18900	75RB#0	20.29	PASS
Band2	15MHz	QPSK	19125	1RB#0	20.48	PASS
Band2	15MHz	16QAM	19125	1RB#0	20.46	PASS
Band2	15MHz	QPSK	19125	1RB#38	20.55	PASS

Band2	15MHz	16QAM	19125	1RB#38	20.50	PASS
Band2	15MHz	QPSK	19125	1RB#74	20.63	PASS
Band2	15MHz	16QAM	19125	1RB#74	20.63	PASS
Band2	15MHz	QPSK	19125	38RB#0	20.50	PASS
Band2	15MHz	16QAM	19125	38RB#0	20.50	PASS
Band2	15MHz	QPSK	19125	38RB#18	20.49	PASS
Band2	15MHz	16QAM	19125	38RB#18	20.47	PASS
Band2	15MHz	QPSK	19125	38RB#37	20.51	PASS
Band2	15MHz	16QAM	19125	38RB#37	20.50	PASS
Band2	15MHz	QPSK	19125	75RB#0	20.50	PASS
Band2	15MHz	16QAM	19125	75RB#0	20.47	PASS
Band2	20MHz	QPSK	18700	1RB#0	20.34	PASS
Band2	20MHz	16QAM	18700	1RB#0	20.52	PASS
Band2	20MHz	QPSK	18700	1RB#49	20.21	PASS
Band2	20MHz	16QAM	18700	1RB#49	20.31	PASS
Band2	20MHz	QPSK	18700	1RB#99	20.27	PASS
Band2	20MHz	16QAM	18700	1RB#99	20.36	PASS
Band2	20MHz	QPSK	18700	50RB#0	20.35	PASS
Band2	20MHz	16QAM	18700	50RB#0	20.33	PASS
Band2	20MHz	QPSK	18700	50RB#25	20.36	PASS
Band2	20MHz	16QAM	18700	50RB#25	20.34	PASS
Band2	20MHz	QPSK	18700	50RB#50	20.16	PASS
Band2	20MHz	16QAM	18700	50RB#50	20.15	PASS
Band2	20MHz	QPSK	18700	100RB#0	20.26	PASS
Band2	20MHz	16QAM	18700	100RB#0	20.27	PASS
Band2	20MHz	QPSK	18900	1RB#0	20.32	PASS
Band2	20MHz	16QAM	18900	1RB#0	20.12	PASS
Band2	20MHz	QPSK	18900	1RB#49	20.46	PASS
Band2	20MHz	16QAM	18900	1RB#49	20.26	PASS
Band2	20MHz	QPSK	18900	1RB#99	20.38	PASS
Band2	20MHz	16QAM	18900	1RB#99	20.20	PASS
Band2	20MHz	QPSK	18900	50RB#0	20.30	PASS
Band2	20MHz	16QAM	18900	50RB#0	20.32	PASS
Band2	20MHz	QPSK	18900	50RB#25	20.29	PASS
Band2	20MHz	16QAM	18900	50RB#25	20.34	PASS
Band2	20MHz	QPSK	18900	50RB#50	20.35	PASS
Band2	20MHz	16QAM	18900	50RB#50	20.38	PASS
Band2	20MHz	QPSK	18900	100RB#0	20.31	PASS
Band2	20MHz	16QAM	18900	100RB#0	20.29	PASS
Band2	20MHz	QPSK	19100	1RB#0	20.56	PASS
Band2	20MHz	16QAM	19100	1RB#0	20.49	PASS
Band2	20MHz	QPSK	19100	1RB#49	20.61	PASS

Band2	20MHz	16QAM	19100	1RB#49	20.51	PASS
Band2	20MHz	QPSK	19100	1RB#99	20.70	PASS
Band2	20MHz	16QAM	19100	1RB#99	20.58	PASS
Band2	20MHz	QPSK	19100	50RB#0	20.51	PASS
Band2	20MHz	16QAM	19100	50RB#0	20.49	PASS
Band2	20MHz	QPSK	19100	50RB#25	20.51	PASS
Band2	20MHz	16QAM	19100	50RB#25	20.52	PASS
Band2	20MHz	QPSK	19100	50RB#50	20.54	PASS
Band2	20MHz	16QAM	19100	50RB#50	20.53	PASS
Band2	20MHz	QPSK	19100	100RB#0	20.55	PASS
Band2	20MHz	16QAM	19100	100RB#0	20.52	PASS

LTE(P1):

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band4	1.4MHz	QPSK	19957	1RB#0	22.72	PASS
Band4	1.4MHz	16QAM	19957	1RB#0	21.70	PASS
Band4	1.4MHz	QPSK	19957	1RB#2	22.70	PASS
Band4	1.4MHz	16QAM	19957	1RB#2	21.71	PASS
Band4	1.4MHz	QPSK	19957	1RB#5	22.71	PASS
Band4	1.4MHz	16QAM	19957	1RB#5	21.66	PASS
Band4	1.4MHz	QPSK	19957	3RB#0	22.77	PASS
Band4	1.4MHz	16QAM	19957	3RB#0	21.63	PASS
Band4	1.4MHz	QPSK	19957	3RB#1	22.76	PASS
Band4	1.4MHz	16QAM	19957	3RB#1	21.62	PASS
Band4	1.4MHz	QPSK	19957	3RB#3	22.72	PASS
Band4	1.4MHz	16QAM	19957	3RB#3	21.62	PASS
Band4	1.4MHz	QPSK	19957	6RB#0	21.79	PASS
Band4	1.4MHz	16QAM	19957	6RB#0	20.90	PASS
Band4	1.4MHz	QPSK	20175	1RB#0	22.71	PASS
Band4	1.4MHz	16QAM	20175	1RB#0	21.67	PASS
Band4	1.4MHz	QPSK	20175	1RB#2	22.68	PASS
Band4	1.4MHz	16QAM	20175	1RB#2	21.66	PASS
Band4	1.4MHz	QPSK	20175	1RB#5	22.69	PASS
Band4	1.4MHz	16QAM	20175	1RB#5	21.64	PASS
Band4	1.4MHz	QPSK	20175	3RB#0	22.71	PASS
Band4	1.4MHz	16QAM	20175	3RB#0	21.61	PASS
Band4	1.4MHz	QPSK	20175	3RB#1	22.69	PASS
Band4	1.4MHz	16QAM	20175	3RB#1	21.63	PASS
Band4	1.4MHz	QPSK	20175	3RB#3	22.70	PASS
Band4	1.4MHz	16QAM	20175	3RB#3	21.53	PASS

Band4	1.4MHz	QPSK	20175	6RB#0	21.74	PASS
Band4	1.4MHz	16QAM	20175	6RB#0	20.88	PASS
Band4	1.4MHz	QPSK	20393	1RB#0	22.58	PASS
Band4	1.4MHz	16QAM	20393	1RB#0	21.55	PASS
Band4	1.4MHz	QPSK	20393	1RB#2	22.56	PASS
Band4	1.4MHz	16QAM	20393	1RB#2	21.59	PASS
Band4	1.4MHz	QPSK	20393	1RB#5	22.60	PASS
Band4	1.4MHz	16QAM	20393	1RB#5	21.55	PASS
Band4	1.4MHz	QPSK	20393	3RB#0	22.66	PASS
Band4	1.4MHz	16QAM	20393	3RB#0	21.52	PASS
Band4	1.4MHz	QPSK	20393	3RB#1	22.64	PASS
Band4	1.4MHz	16QAM	20393	3RB#1	21.50	PASS
Band4	1.4MHz	QPSK	20393	3RB#3	22.61	PASS
Band4	1.4MHz	16QAM	20393	3RB#3	21.47	PASS
Band4	1.4MHz	QPSK	20393	6RB#0	21.64	PASS
Band4	1.4MHz	16QAM	20393	6RB#0	20.79	PASS
Band4	3MHz	QPSK	19965	1RB#0	22.79	PASS
Band4	3MHz	16QAM	19965	1RB#0	21.77	PASS
Band4	3MHz	QPSK	19965	1RB#8	22.77	PASS
Band4	3MHz	16QAM	19965	1RB#8	21.73	PASS
Band4	3MHz	QPSK	19965	1RB#14	22.76	PASS
Band4	3MHz	16QAM	19965	1RB#14	21.72	PASS
Band4	3MHz	QPSK	19965	8RB#0	21.79	PASS
Band4	3MHz	16QAM	19965	8RB#0	20.90	PASS
Band4	3MHz	QPSK	19965	8RB#4	21.78	PASS
Band4	3MHz	16QAM	19965	8RB#4	20.91	PASS
Band4	3MHz	QPSK	19965	8RB#7	21.78	PASS
Band4	3MHz	16QAM	19965	8RB#7	20.91	PASS
Band4	3MHz	QPSK	19965	15RB#0	21.79	PASS
Band4	3MHz	16QAM	19965	15RB#0	20.87	PASS
Band4	3MHz	QPSK	20175	1RB#0	22.82	PASS
Band4	3MHz	16QAM	20175	1RB#0	21.73	PASS
Band4	3MHz	QPSK	20175	1RB#8	22.79	PASS
Band4	3MHz	16QAM	20175	1RB#8	21.65	PASS
Band4	3MHz	QPSK	20175	1RB#14	22.76	PASS
Band4	3MHz	16QAM	20175	1RB#14	21.76	PASS
Band4	3MHz	QPSK	20175	8RB#0	21.74	PASS
Band4	3MHz	16QAM	20175	8RB#0	20.84	PASS
Band4	3MHz	QPSK	20175	8RB#4	21.71	PASS
Band4	3MHz	16QAM	20175	8RB#4	20.86	PASS
Band4	3MHz	QPSK	20175	8RB#7	21.69	PASS
Band4	3MHz	16QAM	20175	8RB#7	20.81	PASS

Band4	3MHz	QPSK	20175	15RB#0	21.70	PASS
Band4	3MHz	16QAM	20175	15RB#0	20.81	PASS
Band4	3MHz	QPSK	20385	1RB#0	22.65	PASS
Band4	3MHz	16QAM	20385	1RB#0	21.61	PASS
Band4	3MHz	QPSK	20385	1RB#8	22.62	PASS
Band4	3MHz	16QAM	20385	1RB#8	21.59	PASS
Band4	3MHz	QPSK	20385	1RB#14	22.69	PASS
Band4	3MHz	16QAM	20385	1RB#14	21.65	PASS
Band4	3MHz	QPSK	20385	8RB#0	21.67	PASS
Band4	3MHz	16QAM	20385	8RB#0	20.80	PASS
Band4	3MHz	QPSK	20385	8RB#4	21.63	PASS
Band4	3MHz	16QAM	20385	8RB#4	20.79	PASS
Band4	3MHz	QPSK	20385	8RB#7	21.65	PASS
Band4	3MHz	16QAM	20385	8RB#7	20.77	PASS
Band4	3MHz	QPSK	20385	15RB#0	21.62	PASS
Band4	3MHz	16QAM	20385	15RB#0	20.79	PASS
Band4	5MHz	QPSK	19975	1RB#0	23.03	PASS
Band4	5MHz	16QAM	19975	1RB#0	21.86	PASS
Band4	5MHz	QPSK	19975	1RB#12	23.00	PASS
Band4	5MHz	16QAM	19975	1RB#12	21.79	PASS
Band4	5MHz	QPSK	19975	1RB#24	23.03	PASS
Band4	5MHz	16QAM	19975	1RB#24	21.85	PASS
Band4	5MHz	QPSK	19975	12RB#0	21.82	PASS
Band4	5MHz	16QAM	19975	12RB#0	20.95	PASS
Band4	5MHz	QPSK	19975	12RB#6	21.86	PASS
Band4	5MHz	16QAM	19975	12RB#6	20.94	PASS
Band4	5MHz	QPSK	19975	12RB#13	21.83	PASS
Band4	5MHz	16QAM	19975	12RB#13	20.92	PASS
Band4	5MHz	QPSK	19975	25RB#0	21.88	PASS
Band4	5MHz	16QAM	19975	25RB#0	20.94	PASS
Band4	5MHz	QPSK	20175	1RB#0	23.00	PASS
Band4	5MHz	16QAM	20175	1RB#0	21.86	PASS
Band4	5MHz	QPSK	20175	1RB#12	22.95	PASS
Band4	5MHz	16QAM	20175	1RB#12	21.71	PASS
Band4	5MHz	QPSK	20175	1RB#24	23.00	PASS
Band4	5MHz	16QAM	20175	1RB#24	21.81	PASS
Band4	5MHz	QPSK	20175	12RB#0	21.79	PASS
Band4	5MHz	16QAM	20175	12RB#0	20.90	PASS
Band4	5MHz	QPSK	20175	12RB#6	21.78	PASS
Band4	5MHz	16QAM	20175	12RB#6	20.90	PASS
Band4	5MHz	QPSK	20175	12RB#13	21.76	PASS
Band4	5MHz	16QAM	20175	12RB#13	20.84	PASS

Band4	5MHz	QPSK	20175	25RB#0	21.85	PASS
Band4	5MHz	16QAM	20175	25RB#0	20.88	PASS
Band4	5MHz	QPSK	20375	1RB#0	22.98	PASS
Band4	5MHz	16QAM	20375	1RB#0	21.80	PASS
Band4	5MHz	QPSK	20375	1RB#12	22.87	PASS
Band4	5MHz	16QAM	20375	1RB#12	21.72	PASS
Band4	5MHz	QPSK	20375	1RB#24	22.91	PASS
Band4	5MHz	16QAM	20375	1RB#24	21.75	PASS
Band4	5MHz	QPSK	20375	12RB#0	21.74	PASS
Band4	5MHz	16QAM	20375	12RB#0	20.90	PASS
Band4	5MHz	QPSK	20375	12RB#6	21.73	PASS
Band4	5MHz	16QAM	20375	12RB#6	20.88	PASS
Band4	5MHz	QPSK	20375	12RB#13	21.77	PASS
Band4	5MHz	16QAM	20375	12RB#13	20.84	PASS
Band4	5MHz	QPSK	20375	25RB#0	21.79	PASS
Band4	5MHz	16QAM	20375	25RB#0	20.89	PASS
Band4	10MHz	QPSK	20000	1RB#0	22.96	PASS
Band4	10MHz	16QAM	20000	1RB#0	22.00	PASS
Band4	10MHz	QPSK	20000	1RB#24	22.92	PASS
Band4	10MHz	16QAM	20000	1RB#24	21.91	PASS
Band4	10MHz	QPSK	20000	1RB#49	22.89	PASS
Band4	10MHz	16QAM	20000	1RB#49	21.83	PASS
Band4	10MHz	QPSK	20000	25RB#0	21.91	PASS
Band4	10MHz	16QAM	20000	25RB#0	20.94	PASS
Band4	10MHz	QPSK	20000	25RB#12	21.92	PASS
Band4	10MHz	16QAM	20000	25RB#12	20.93	PASS
Band4	10MHz	QPSK	20000	25RB#25	21.91	PASS
Band4	10MHz	16QAM	20000	25RB#25	20.96	PASS
Band4	10MHz	QPSK	20000	50RB#0	21.90	PASS
Band4	10MHz	16QAM	20000	50RB#0	20.94	PASS
Band4	10MHz	QPSK	20175	1RB#0	22.82	PASS
Band4	10MHz	16QAM	20175	1RB#0	21.84	PASS
Band4	10MHz	QPSK	20175	1RB#24	22.87	PASS
Band4	10MHz	16QAM	20175	1RB#24	21.89	PASS
Band4	10MHz	QPSK	20175	1RB#49	22.87	PASS
Band4	10MHz	16QAM	20175	1RB#49	21.86	PASS
Band4	10MHz	QPSK	20175	25RB#0	21.89	PASS
Band4	10MHz	16QAM	20175	25RB#0	20.89	PASS
Band4	10MHz	QPSK	20175	25RB#12	21.87	PASS
Band4	10MHz	16QAM	20175	25RB#12	20.89	PASS
Band4	10MHz	QPSK	20175	25RB#25	21.84	PASS
Band4	10MHz	16QAM	20175	25RB#25	20.86	PASS

Band4	10MHz	QPSK	20175	50RB#0	21.85	PASS
Band4	10MHz	16QAM	20175	50RB#0	20.87	PASS
Band4	10MHz	QPSK	20350	1RB#0	22.95	PASS
Band4	10MHz	16QAM	20350	1RB#0	21.98	PASS
Band4	10MHz	QPSK	20350	1RB#24	22.85	PASS
Band4	10MHz	16QAM	20350	1RB#24	21.78	PASS
Band4	10MHz	QPSK	20350	1RB#49	22.81	PASS
Band4	10MHz	16QAM	20350	1RB#49	21.80	PASS
Band4	10MHz	QPSK	20350	25RB#0	21.88	PASS
Band4	10MHz	16QAM	20350	25RB#0	20.93	PASS
Band4	10MHz	QPSK	20350	25RB#12	21.89	PASS
Band4	10MHz	16QAM	20350	25RB#12	20.93	PASS
Band4	10MHz	QPSK	20350	25RB#25	21.83	PASS
Band4	10MHz	16QAM	20350	25RB#25	20.89	PASS
Band4	10MHz	QPSK	20350	50RB#0	21.84	PASS
Band4	10MHz	16QAM	20350	50RB#0	20.90	PASS
Band4	15MHz	QPSK	20025	1RB#0	23.01	PASS
Band4	15MHz	16QAM	20025	1RB#0	22.08	PASS
Band4	15MHz	QPSK	20025	1RB#38	22.99	PASS
Band4	15MHz	16QAM	20025	1RB#38	21.96	PASS
Band4	15MHz	QPSK	20025	1RB#74	22.84	PASS
Band4	15MHz	16QAM	20025	1RB#74	21.86	PASS
Band4	15MHz	QPSK	20025	38RB#0	21.90	PASS
Band4	15MHz	16QAM	20025	38RB#0	21.91	PASS
Band4	15MHz	QPSK	20025	38RB#18	21.91	PASS
Band4	15MHz	16QAM	20025	38RB#18	21.91	PASS
Band4	15MHz	QPSK	20025	38RB#37	21.91	PASS
Band4	15MHz	16QAM	20025	38RB#37	21.88	PASS
Band4	15MHz	QPSK	20025	75RB#0	21.90	PASS
Band4	15MHz	16QAM	20025	75RB#0	20.97	PASS
Band4	15MHz	QPSK	20175	1RB#0	22.94	PASS
Band4	15MHz	16QAM	20175	1RB#0	21.76	PASS
Band4	15MHz	QPSK	20175	1RB#38	22.96	PASS
Band4	15MHz	16QAM	20175	1RB#38	22.00	PASS
Band4	15MHz	QPSK	20175	1RB#74	22.82	PASS
Band4	15MHz	16QAM	20175	1RB#74	21.86	PASS
Band4	15MHz	QPSK	20175	38RB#0	21.83	PASS
Band4	15MHz	16QAM	20175	38RB#0	21.84	PASS
Band4	15MHz	QPSK	20175	38RB#18	21.81	PASS
Band4	15MHz	16QAM	20175	38RB#18	21.83	PASS
Band4	15MHz	QPSK	20175	38RB#37	21.82	PASS
Band4	15MHz	16QAM	20175	38RB#37	21.83	PASS

Band4	15MHz	QPSK	20175	75RB#0	21.82	PASS
Band4	15MHz	16QAM	20175	75RB#0	20.86	PASS
Band4	15MHz	QPSK	20325	1RB#0	23.03	PASS
Band4	15MHz	16QAM	20325	1RB#0	21.94	PASS
Band4	15MHz	QPSK	20325	1RB#38	22.91	PASS
Band4	15MHz	16QAM	20325	1RB#38	21.84	PASS
Band4	15MHz	QPSK	20325	1RB#74	22.85	PASS
Band4	15MHz	16QAM	20325	1RB#74	21.78	PASS
Band4	15MHz	QPSK	20325	38RB#0	21.80	PASS
Band4	15MHz	16QAM	20325	38RB#0	21.79	PASS
Band4	15MHz	QPSK	20325	38RB#18	21.81	PASS
Band4	15MHz	16QAM	20325	38RB#18	21.80	PASS
Band4	15MHz	QPSK	20325	38RB#37	21.80	PASS
Band4	15MHz	16QAM	20325	38RB#37	21.80	PASS
Band4	15MHz	QPSK	20325	75RB#0	21.80	PASS
Band4	15MHz	16QAM	20325	75RB#0	20.87	PASS
Band4	20MHz	QPSK	20050	1RB#0	23.05	PASS
Band4	20MHz	16QAM	20050	1RB#0	21.95	PASS
Band4	20MHz	QPSK	20050	1RB#49	23.03	PASS
Band4	20MHz	16QAM	20050	1RB#49	21.85	PASS
Band4	20MHz	QPSK	20050	1RB#99	23.07	PASS
Band4	20MHz	16QAM	20050	1RB#99	21.90	PASS
Band4	20MHz	QPSK	20050	50RB#0	21.97	PASS
Band4	20MHz	16QAM	20050	50RB#0	21.01	PASS
Band4	20MHz	QPSK	20050	50RB#25	21.95	PASS
Band4	20MHz	16QAM	20050	50RB#25	21.00	PASS
Band4	20MHz	QPSK	20050	50RB#50	21.93	PASS
Band4	20MHz	16QAM	20050	50RB#50	21.04	PASS
Band4	20MHz	QPSK	20050	100RB#0	21.95	PASS
Band4	20MHz	16QAM	20050	100RB#0	20.99	PASS
Band4	20MHz	QPSK	20175	1RB#0	22.92	PASS
Band4	20MHz	16QAM	20175	1RB#0	21.77	PASS
Band4	20MHz	QPSK	20175	1RB#49	22.97	PASS
Band4	20MHz	16QAM	20175	1RB#49	21.77	PASS
Band4	20MHz	QPSK	20175	1RB#99	22.87	PASS
Band4	20MHz	16QAM	20175	1RB#99	21.66	PASS
Band4	20MHz	QPSK	20175	50RB#0	21.87	PASS
Band4	20MHz	16QAM	20175	50RB#0	20.97	PASS
Band4	20MHz	QPSK	20175	50RB#25	21.87	PASS
Band4	20MHz	16QAM	20175	50RB#25	20.96	PASS
Band4	20MHz	QPSK	20175	50RB#50	21.81	PASS
Band4	20MHz	16QAM	20175	50RB#50	20.87	PASS

Band4	20MHz	QPSK	20175	100RB#0	21.87	PASS
Band4	20MHz	16QAM	20175	100RB#0	20.90	PASS
Band4	20MHz	QPSK	20300	1RB#0	23.00	PASS
Band4	20MHz	16QAM	20300	1RB#0	21.87	PASS
Band4	20MHz	QPSK	20300	1RB#49	22.88	PASS
Band4	20MHz	16QAM	20300	1RB#49	21.76	PASS
Band4	20MHz	QPSK	20300	1RB#99	22.81	PASS
Band4	20MHz	16QAM	20300	1RB#99	21.61	PASS
Band4	20MHz	QPSK	20300	50RB#0	21.93	PASS
Band4	20MHz	16QAM	20300	50RB#0	20.94	PASS
Band4	20MHz	QPSK	20300	50RB#25	21.93	PASS
Band4	20MHz	16QAM	20300	50RB#25	20.95	PASS
Band4	20MHz	QPSK	20300	50RB#50	21.75	PASS
Band4	20MHz	16QAM	20300	50RB#50	20.84	PASS
Band4	20MHz	QPSK	20300	100RB#0	21.84	PASS
Band4	20MHz	16QAM	20300	100RB#0	20.90	PASS

LTE(P4): Sensor ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band4	1.4MHz	QPSK	19957	1RB#0	20.56	PASS
Band4	1.4MHz	16QAM	19957	1RB#0	20.65	PASS
Band4	1.4MHz	QPSK	19957	1RB#2	20.45	PASS
Band4	1.4MHz	16QAM	19957	1RB#2	20.72	PASS
Band4	1.4MHz	QPSK	19957	1RB#5	20.83	PASS
Band4	1.4MHz	16QAM	19957	1RB#5	20.72	PASS
Band4	1.4MHz	QPSK	19957	3RB#0	20.85	PASS
Band4	1.4MHz	16QAM	19957	3RB#0	20.67	PASS
Band4	1.4MHz	QPSK	19957	3RB#1	20.82	PASS
Band4	1.4MHz	16QAM	19957	3RB#1	20.65	PASS
Band4	1.4MHz	QPSK	19957	3RB#3	20.76	PASS
Band4	1.4MHz	16QAM	19957	3RB#3	20.54	PASS
Band4	1.4MHz	QPSK	19957	6RB#0	20.81	PASS
Band4	1.4MHz	16QAM	19957	6RB#0	20.82	PASS
Band4	1.4MHz	QPSK	20175	1RB#0	20.83	PASS
Band4	1.4MHz	16QAM	20175	1RB#0	20.65	PASS
Band4	1.4MHz	QPSK	20175	1RB#2	20.76	PASS
Band4	1.4MHz	16QAM	20175	1RB#2	20.68	PASS
Band4	1.4MHz	QPSK	20175	1RB#5	20.87	PASS
Band4	1.4MHz	16QAM	20175	1RB#5	20.68	PASS
Band4	1.4MHz	QPSK	20175	3RB#0	20.82	PASS
Band4	1.4MHz	16QAM	20175	3RB#0	20.56	PASS

Band4	1.4MHz	QPSK	20175	3RB#1	20.72	PASS
Band4	1.4MHz	16QAM	20175	3RB#1	20.55	PASS
Band4	1.4MHz	QPSK	20175	3RB#3	20.74	PASS
Band4	1.4MHz	16QAM	20175	3RB#3	20.55	PASS
Band4	1.4MHz	QPSK	20175	6RB#0	20.76	PASS
Band4	1.4MHz	16QAM	20175	6RB#0	20.56	PASS
Band4	1.4MHz	QPSK	20393	1RB#0	20.45	PASS
Band4	1.4MHz	16QAM	20393	1RB#0	20.36	PASS
Band4	1.4MHz	QPSK	20393	1RB#2	20.45	PASS
Band4	1.4MHz	16QAM	20393	1RB#2	20.25	PASS
Band4	1.4MHz	QPSK	20393	1RB#5	20.65	PASS
Band4	1.4MHz	16QAM	20393	1RB#5	20.45	PASS
Band4	1.4MHz	QPSK	20393	3RB#0	20.25	PASS
Band4	1.4MHz	16QAM	20393	3RB#0	20.36	PASS
Band4	1.4MHz	QPSK	20393	3RB#1	20.54	PASS
Band4	1.4MHz	16QAM	20393	3RB#1	20.45	PASS
Band4	1.4MHz	QPSK	20393	3RB#3	20.25	PASS
Band4	1.4MHz	16QAM	20393	3RB#3	20.36	PASS
Band4	1.4MHz	QPSK	20393	6RB#0	20.54	PASS
Band4	1.4MHz	16QAM	20393	6RB#0	20.58	PASS
Band4	3MHz	QPSK	19965	1RB#0	20.75	PASS
Band4	3MHz	16QAM	19965	1RB#0	20.65	PASS
Band4	3MHz	QPSK	19965	1RB#8	20.74	PASS
Band4	3MHz	16QAM	19965	1RB#8	20.72	PASS
Band4	3MHz	QPSK	19965	1RB#14	20.73	PASS
Band4	3MHz	16QAM	19965	1RB#14	20.75	PASS
Band4	3MHz	QPSK	19965	8RB#0	20.75	PASS
Band4	3MHz	16QAM	19965	8RB#0	20.76	PASS
Band4	3MHz	QPSK	19965	8RB#4	20.75	PASS
Band4	3MHz	16QAM	19965	8RB#4	20.83	PASS
Band4	3MHz	QPSK	19965	8RB#7	20.85	PASS
Band4	3MHz	16QAM	19965	8RB#7	20.84	PASS
Band4	3MHz	QPSK	19965	15RB#0	20.85	PASS
Band4	3MHz	16QAM	19965	15RB#0	20.86	PASS
Band4	3MHz	QPSK	20175	1RB#0	20.75	PASS
Band4	3MHz	16QAM	20175	1RB#0	20.73	PASS
Band4	3MHz	QPSK	20175	1RB#8	20.72	PASS
Band4	3MHz	16QAM	20175	1RB#8	20.71	PASS
Band4	3MHz	QPSK	20175	1RB#14	20.78	PASS
Band4	3MHz	16QAM	20175	1RB#14	20.76	PASS
Band4	3MHz	QPSK	20175	8RB#0	20.75	PASS
Band4	3MHz	16QAM	20175	8RB#0	20.74	PASS

Band4	3MHz	QPSK	20175	8RB#4	20.72	PASS
Band4	3MHz	16QAM	20175	8RB#4	20.73	PASS
Band4	3MHz	QPSK	20175	8RB#7	20.65	PASS
Band4	3MHz	16QAM	20175	8RB#7	20.67	PASS
Band4	3MHz	QPSK	20175	15RB#0	20.75	PASS
Band4	3MHz	16QAM	20175	15RB#0	20.75	PASS
Band4	3MHz	QPSK	20385	1RB#0	20.71	PASS
Band4	3MHz	16QAM	20385	1RB#0	20.76	PASS
Band4	3MHz	QPSK	20385	1RB#8	20.85	PASS
Band4	3MHz	16QAM	20385	1RB#8	20.62	PASS
Band4	3MHz	QPSK	20385	1RB#14	20.35	PASS
Band4	3MHz	16QAM	20385	1RB#14	20.74	PASS
Band4	3MHz	QPSK	20385	8RB#0	20.71	PASS
Band4	3MHz	16QAM	20385	8RB#0	20.72	PASS
Band4	3MHz	QPSK	20385	8RB#4	20.73	PASS
Band4	3MHz	16QAM	20385	8RB#4	20.76	PASS
Band4	3MHz	QPSK	20385	8RB#7	20.75	PASS
Band4	3MHz	16QAM	20385	8RB#7	20.76	PASS
Band4	3MHz	QPSK	20385	15RB#0	20.67	PASS
Band4	3MHz	16QAM	20385	15RB#0	20.78	PASS
Band4	5MHz	QPSK	19975	1RB#0	20.09	PASS
Band4	5MHz	16QAM	19975	1RB#0	20.88	PASS
Band4	5MHz	QPSK	19975	1RB#12	20.97	PASS
Band4	5MHz	16QAM	19975	1RB#12	20.82	PASS
Band4	5MHz	QPSK	19975	1RB#24	20.93	PASS
Band4	5MHz	16QAM	19975	1RB#24	20.86	PASS
Band4	5MHz	QPSK	19975	12RB#0	20.78	PASS
Band4	5MHz	16QAM	19975	12RB#0	20.65	PASS
Band4	5MHz	QPSK	19975	12RB#6	20.36	PASS
Band4	5MHz	16QAM	19975	12RB#6	20.78	PASS
Band4	5MHz	QPSK	19975	12RB#13	20.56	PASS
Band4	5MHz	16QAM	19975	12RB#13	20.58	PASS
Band4	5MHz	QPSK	19975	25RB#0	20.65	PASS
Band4	5MHz	16QAM	19975	25RB#0	20.78	PASS
Band4	5MHz	QPSK	20175	1RB#0	20.58	PASS
Band4	5MHz	16QAM	20175	1RB#0	20.98	PASS
Band4	5MHz	QPSK	20175	1RB#12	20.78	PASS
Band4	5MHz	16QAM	20175	1RB#12	20.76	PASS
Band4	5MHz	QPSK	20175	1RB#24	20.93	PASS
Band4	5MHz	16QAM	20175	1RB#24	20.81	PASS
Band4	5MHz	QPSK	20175	12RB#0	20.85	PASS
Band4	5MHz	16QAM	20175	12RB#0	20.81	PASS

Band4	5MHz	QPSK	20175	12RB#6	20.72	PASS
Band4	5MHz	16QAM	20175	12RB#6	20.83	PASS
Band4	5MHz	QPSK	20175	12RB#13	20.76	PASS
Band4	5MHz	16QAM	20175	12RB#13	20.75	PASS
Band4	5MHz	QPSK	20175	25RB#0	20.84	PASS
Band4	5MHz	16QAM	20175	25RB#0	20.85	PASS
Band4	5MHz	QPSK	20375	1RB#0	20.98	PASS
Band4	5MHz	16QAM	20375	1RB#0	20.89	PASS
Band4	5MHz	QPSK	20375	1RB#12	20.82	PASS
Band4	5MHz	16QAM	20375	1RB#12	20.73	PASS
Band4	5MHz	QPSK	20375	1RB#24	20.86	PASS
Band4	5MHz	16QAM	20375	1RB#24	20.75	PASS
Band4	5MHz	QPSK	20375	12RB#0	20.84	PASS
Band4	5MHz	16QAM	20375	12RB#0	20.85	PASS
Band4	5MHz	QPSK	20375	12RB#6	20.86	PASS
Band4	5MHz	16QAM	20375	12RB#6	20.82	PASS
Band4	5MHz	QPSK	20375	12RB#13	20.81	PASS
Band4	5MHz	16QAM	20375	12RB#13	20.75	PASS
Band4	5MHz	QPSK	20375	25RB#0	20.86	PASS
Band4	5MHz	16QAM	20375	25RB#0	20.85	PASS
Band4	10MHz	QPSK	20000	1RB#0	20.97	PASS
Band4	10MHz	16QAM	20000	1RB#0	20.95	PASS
Band4	10MHz	QPSK	20000	1RB#24	20.86	PASS
Band4	10MHz	16QAM	20000	1RB#24	20.85	PASS
Band4	10MHz	QPSK	20000	1RB#49	20.91	PASS
Band4	10MHz	16QAM	20000	1RB#49	20.92	PASS
Band4	10MHz	QPSK	20000	25RB#0	20.86	PASS
Band4	10MHz	16QAM	20000	25RB#0	20.85	PASS
Band4	10MHz	QPSK	20000	25RB#12	20.83	PASS
Band4	10MHz	16QAM	20000	25RB#12	20.85	PASS
Band4	10MHz	QPSK	20000	25RB#25	20.94	PASS
Band4	10MHz	16QAM	20000	25RB#25	20.97	PASS
Band4	10MHz	QPSK	20000	50RB#0	20.95	PASS
Band4	10MHz	16QAM	20000	50RB#0	20.86	PASS
Band4	10MHz	QPSK	20175	1RB#0	20.85	PASS
Band4	10MHz	16QAM	20175	1RB#0	20.82	PASS
Band4	10MHz	QPSK	20175	1RB#24	20.83	PASS
Band4	10MHz	16QAM	20175	1RB#24	20.85	PASS
Band4	10MHz	QPSK	20175	1RB#49	20.86	PASS
Band4	10MHz	16QAM	20175	1RB#49	20.88	PASS
Band4	10MHz	QPSK	20175	25RB#0	20.83	PASS
Band4	10MHz	16QAM	20175	25RB#0	20.74	PASS

Band4	10MHz	QPSK	20175	25RB#12	20.85	PASS
Band4	10MHz	16QAM	20175	25RB#12	20.76	PASS
Band4	10MHz	QPSK	20175	25RB#25	20.75	PASS
Band4	10MHz	16QAM	20175	25RB#25	20.72	PASS
Band4	10MHz	QPSK	20175	50RB#0	20.85	PASS
Band4	10MHz	16QAM	20175	50RB#0	20.76	PASS
Band4	10MHz	QPSK	20350	1RB#0	20.95	PASS
Band4	10MHz	16QAM	20350	1RB#0	20.94	PASS
Band4	10MHz	QPSK	20350	1RB#24	20.82	PASS
Band4	10MHz	16QAM	20350	1RB#24	20.83	PASS
Band4	10MHz	QPSK	20350	1RB#49	20.86	PASS
Band4	10MHz	16QAM	20350	1RB#49	20.85	PASS
Band4	10MHz	QPSK	20350	25RB#0	20.94	PASS
Band4	10MHz	16QAM	20350	25RB#0	20.87	PASS
Band4	10MHz	QPSK	20350	25RB#12	20.95	PASS
Band4	10MHz	16QAM	20350	25RB#12	20.86	PASS
Band4	10MHz	QPSK	20350	25RB#25	20.85	PASS
Band4	10MHz	16QAM	20350	25RB#25	20.82	PASS
Band4	10MHz	QPSK	20350	50RB#0	20.96	PASS
Band4	10MHz	16QAM	20350	50RB#0	20.81	PASS
Band4	15MHz	QPSK	20025	1RB#0	20.92	PASS
Band4	15MHz	16QAM	20025	1RB#0	20.96	PASS
Band4	15MHz	QPSK	20025	1RB#38	20.95	PASS
Band4	15MHz	16QAM	20025	1RB#38	20.88	PASS
Band4	15MHz	QPSK	20025	1RB#74	20.97	PASS
Band4	15MHz	16QAM	20025	1RB#74	20.95	PASS
Band4	15MHz	QPSK	20025	38RB#0	20.96	PASS
Band4	15MHz	16QAM	20025	38RB#0	20.92	PASS
Band4	15MHz	QPSK	20025	38RB#18	20.93	PASS
Band4	15MHz	16QAM	20025	38RB#18	20.95	PASS
Band4	15MHz	QPSK	20025	38RB#37	20.91	PASS
Band4	15MHz	16QAM	20025	38RB#37	20.92	PASS
Band4	15MHz	QPSK	20025	75RB#0	20.96	PASS
Band4	15MHz	16QAM	20025	75RB#0	20.95	PASS
Band4	15MHz	QPSK	20175	1RB#0	20.97	PASS
Band4	15MHz	16QAM	20175	1RB#0	20.88	PASS
Band4	15MHz	QPSK	20175	1RB#38	20.86	PASS
Band4	15MHz	16QAM	20175	1RB#38	20.85	PASS
Band4	15MHz	QPSK	20175	1RB#74	20.76	PASS
Band4	15MHz	16QAM	20175	1RB#74	20.74	PASS
Band4	15MHz	QPSK	20175	38RB#0	20.72	PASS
Band4	15MHz	16QAM	20175	38RB#0	20.83	PASS

Band4	15MHz	QPSK	20175	38RB#18	20.85	PASS
Band4	15MHz	16QAM	20175	38RB#18	20.86	PASS
Band4	15MHz	QPSK	20175	38RB#37	20.77	PASS
Band4	15MHz	16QAM	20175	38RB#37	20.88	PASS
Band4	15MHz	QPSK	20175	75RB#0	20.86	PASS
Band4	15MHz	16QAM	20175	75RB#0	20.77	PASS
Band4	15MHz	QPSK	20325	1RB#0	20.95	PASS
Band4	15MHz	16QAM	20325	1RB#0	20.06	PASS
Band4	15MHz	QPSK	20325	1RB#38	20.87	PASS
Band4	15MHz	16QAM	20325	1RB#38	20.82	PASS
Band4	15MHz	QPSK	20325	1RB#74	20.73	PASS
Band4	15MHz	16QAM	20325	1RB#74	20.75	PASS
Band4	15MHz	QPSK	20325	38RB#0	20.88	PASS
Band4	15MHz	16QAM	20325	38RB#0	20.87	PASS
Band4	15MHz	QPSK	20325	38RB#18	20.84	PASS
Band4	15MHz	16QAM	20325	38RB#18	20.82	PASS
Band4	15MHz	QPSK	20325	38RB#37	20.83	PASS
Band4	15MHz	16QAM	20325	38RB#37	20.82	PASS
Band4	15MHz	QPSK	20325	75RB#0	20.81	PASS
Band4	15MHz	16QAM	20325	75RB#0	20.82	PASS
Band4	20MHz	QPSK	20050	1RB#0	20.06	PASS
Band4	20MHz	16QAM	20050	1RB#0	20.95	PASS
Band4	20MHz	QPSK	20050	1RB#49	20.05	PASS
Band4	20MHz	16QAM	20050	1RB#49	20.94	PASS
Band4	20MHz	QPSK	20050	1RB#99	20.04	PASS
Band4	20MHz	16QAM	20050	1RB#99	20.82	PASS
Band4	20MHz	QPSK	20050	50RB#0	20.96	PASS
Band4	20MHz	16QAM	20050	50RB#0	20.85	PASS
Band4	20MHz	QPSK	20050	50RB#25	20.91	PASS
Band4	20MHz	16QAM	20050	50RB#25	20.86	PASS
Band4	20MHz	QPSK	20050	50RB#50	20.68	PASS
Band4	20MHz	16QAM	20050	50RB#50	20.74	PASS
Band4	20MHz	QPSK	20050	100RB#0	20.56	PASS
Band4	20MHz	16QAM	20050	100RB#0	20.65	PASS
Band4	20MHz	QPSK	20175	1RB#0	20.81	PASS
Band4	20MHz	16QAM	20175	1RB#0	20.63	PASS
Band4	20MHz	QPSK	20175	1RB#49	20.54	PASS
Band4	20MHz	16QAM	20175	1RB#49	20.65	PASS
Band4	20MHz	QPSK	20175	1RB#99	20.25	PASS
Band4	20MHz	16QAM	20175	1RB#99	20.65	PASS
Band4	20MHz	QPSK	20175	50RB#0	20.42	PASS
Band4	20MHz	16QAM	20175	50RB#0	20.85	PASS

Band4	20MHz	QPSK	20175	50RB#25	20.65	PASS
Band4	20MHz	16QAM	20175	50RB#25	20.37	PASS
Band4	20MHz	QPSK	20175	50RB#50	20.56	PASS
Band4	20MHz	16QAM	20175	50RB#50	20.61	PASS
Band4	20MHz	QPSK	20175	100RB#0	20.81	PASS
Band4	20MHz	16QAM	20175	100RB#0	20.56	PASS
Band4	20MHz	QPSK	20300	1RB#0	20.18	PASS
Band4	20MHz	16QAM	20300	1RB#0	20.65	PASS
Band4	20MHz	QPSK	20300	1RB#49	20.56	PASS
Band4	20MHz	16QAM	20300	1RB#49	20.87	PASS
Band4	20MHz	QPSK	20300	1RB#99	20.75	PASS
Band4	20MHz	16QAM	20300	1RB#99	20.64	PASS
Band4	20MHz	QPSK	20300	50RB#0	20.56	PASS
Band4	20MHz	16QAM	20300	50RB#0	20.87	PASS
Band4	20MHz	QPSK	20300	50RB#25	20.75	PASS
Band4	20MHz	16QAM	20300	50RB#25	20.56	PASS
Band4	20MHz	QPSK	20300	50RB#50	20.75	PASS
Band4	20MHz	16QAM	20300	50RB#50	20.86	PASS
Band4	20MHz	QPSK	20300	100RB#0	20.36	PASS
Band4	20MHz	16QAM	20300	100RB#0	20.54	PASS

LTE(P3): Hotspot ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band4	1.4MHz	QPSK	19957	1RB#0	19.80	PASS
Band4	1.4MHz	16QAM	19957	1RB#0	19.76	PASS
Band4	1.4MHz	QPSK	19957	1RB#2	19.78	PASS
Band4	1.4MHz	16QAM	19957	1RB#2	19.75	PASS
Band4	1.4MHz	QPSK	19957	1RB#5	19.80	PASS
Band4	1.4MHz	16QAM	19957	1RB#5	19.75	PASS
Band4	1.4MHz	QPSK	19957	3RB#0	19.80	PASS
Band4	1.4MHz	16QAM	19957	3RB#0	19.60	PASS
Band4	1.4MHz	QPSK	19957	3RB#1	19.80	PASS
Band4	1.4MHz	16QAM	19957	3RB#1	19.60	PASS
Band4	1.4MHz	QPSK	19957	3RB#3	19.75	PASS
Band4	1.4MHz	16QAM	19957	3RB#3	19.57	PASS
Band4	1.4MHz	QPSK	19957	6RB#0	19.84	PASS
Band4	1.4MHz	16QAM	19957	6RB#0	19.80	PASS
Band4	1.4MHz	QPSK	20175	1RB#0	19.84	PASS
Band4	1.4MHz	16QAM	20175	1RB#0	19.65	PASS
Band4	1.4MHz	QPSK	20175	1RB#2	19.78	PASS
Band4	1.4MHz	16QAM	20175	1RB#2	19.65	PASS

Band4	1.4MHz	QPSK	20175	1RB#5	19.84	PASS
Band4	1.4MHz	16QAM	20175	1RB#5	19.66	PASS
Band4	1.4MHz	QPSK	20175	3RB#0	19.81	PASS
Band4	1.4MHz	16QAM	20175	3RB#0	19.57	PASS
Band4	1.4MHz	QPSK	20175	3RB#1	19.79	PASS
Band4	1.4MHz	16QAM	20175	3RB#1	19.58	PASS
Band4	1.4MHz	QPSK	20175	3RB#3	19.78	PASS
Band4	1.4MHz	16QAM	20175	3RB#3	19.57	PASS
Band4	1.4MHz	QPSK	20175	6RB#0	19.74	PASS
Band4	1.4MHz	16QAM	20175	6RB#0	19.55	PASS
Band4	1.4MHz	QPSK	20393	1RB#0	19.69	PASS
Band4	1.4MHz	16QAM	20393	1RB#0	19.65	PASS
Band4	1.4MHz	QPSK	20393	1RB#2	19.64	PASS
Band4	1.4MHz	16QAM	20393	1RB#2	19.61	PASS
Band4	1.4MHz	QPSK	20393	1RB#5	19.67	PASS
Band4	1.4MHz	16QAM	20393	1RB#5	19.57	PASS
Band4	1.4MHz	QPSK	20393	3RB#0	19.67	PASS
Band4	1.4MHz	16QAM	20393	3RB#0	19.48	PASS
Band4	1.4MHz	QPSK	20393	3RB#1	19.67	PASS
Band4	1.4MHz	16QAM	20393	3RB#1	19.46	PASS
Band4	1.4MHz	QPSK	20393	3RB#3	19.61	PASS
Band4	1.4MHz	16QAM	20393	3RB#3	19.43	PASS
Band4	1.4MHz	QPSK	20393	6RB#0	19.70	PASS
Band4	1.4MHz	16QAM	20393	6RB#0	19.67	PASS
Band4	3MHz	QPSK	19965	1RB#0	19.81	PASS
Band4	3MHz	16QAM	19965	1RB#0	19.78	PASS
Band4	3MHz	QPSK	19965	1RB#8	19.81	PASS
Band4	3MHz	16QAM	19965	1RB#8	19.79	PASS
Band4	3MHz	QPSK	19965	1RB#14	19.79	PASS
Band4	3MHz	16QAM	19965	1RB#14	19.76	PASS
Band4	3MHz	QPSK	19965	8RB#0	19.84	PASS
Band4	3MHz	16QAM	19965	8RB#0	19.82	PASS
Band4	3MHz	QPSK	19965	8RB#4	19.85	PASS
Band4	3MHz	16QAM	19965	8RB#4	19.85	PASS
Band4	3MHz	QPSK	19965	8RB#7	19.83	PASS
Band4	3MHz	16QAM	19965	8RB#7	19.82	PASS
Band4	3MHz	QPSK	19965	15RB#0	19.82	PASS
Band4	3MHz	16QAM	19965	15RB#0	19.82	PASS
Band4	3MHz	QPSK	20175	1RB#0	19.78	PASS
Band4	3MHz	16QAM	20175	1RB#0	19.78	PASS
Band4	3MHz	QPSK	20175	1RB#8	19.78	PASS
Band4	3MHz	16QAM	20175	1RB#8	19.77	PASS

Band4	3MHz	QPSK	20175	1RB#14	19.77	PASS
Band4	3MHz	16QAM	20175	1RB#14	19.73	PASS
Band4	3MHz	QPSK	20175	8RB#0	19.77	PASS
Band4	3MHz	16QAM	20175	8RB#0	19.78	PASS
Band4	3MHz	QPSK	20175	8RB#4	19.76	PASS
Band4	3MHz	16QAM	20175	8RB#4	19.79	PASS
Band4	3MHz	QPSK	20175	8RB#7	19.73	PASS
Band4	3MHz	16QAM	20175	8RB#7	19.77	PASS
Band4	3MHz	QPSK	20175	15RB#0	19.72	PASS
Band4	3MHz	16QAM	20175	15RB#0	19.77	PASS
Band4	3MHz	QPSK	20385	1RB#0	19.72	PASS
Band4	3MHz	16QAM	20385	1RB#0	19.71	PASS
Band4	3MHz	QPSK	20385	1RB#8	19.74	PASS
Band4	3MHz	16QAM	20385	1RB#8	19.69	PASS
Band4	3MHz	QPSK	20385	1RB#14	19.68	PASS
Band4	3MHz	16QAM	20385	1RB#14	19.68	PASS
Band4	3MHz	QPSK	20385	8RB#0	19.75	PASS
Band4	3MHz	16QAM	20385	8RB#0	19.77	PASS
Band4	3MHz	QPSK	20385	8RB#4	19.77	PASS
Band4	3MHz	16QAM	20385	8RB#4	19.77	PASS
Band4	3MHz	QPSK	20385	8RB#7	19.73	PASS
Band4	3MHz	16QAM	20385	8RB#7	19.72	PASS
Band4	3MHz	QPSK	20385	15RB#0	19.69	PASS
Band4	3MHz	16QAM	20385	15RB#0	19.74	PASS
Band4	5MHz	QPSK	19975	1RB#0	20.01	PASS
Band4	5MHz	16QAM	19975	1RB#0	19.88	PASS
Band4	5MHz	QPSK	19975	1RB#12	19.96	PASS
Band4	5MHz	16QAM	19975	1RB#12	19.83	PASS
Band4	5MHz	QPSK	19975	1RB#24	19.95	PASS
Band4	5MHz	16QAM	19975	1RB#24	19.82	PASS
Band4	5MHz	QPSK	19975	12RB#0	19.88	PASS
Band4	5MHz	16QAM	19975	12RB#0	19.88	PASS
Band4	5MHz	QPSK	19975	12RB#6	19.90	PASS
Band4	5MHz	16QAM	19975	12RB#6	19.88	PASS
Band4	5MHz	QPSK	19975	12RB#13	19.87	PASS
Band4	5MHz	16QAM	19975	12RB#13	19.87	PASS
Band4	5MHz	QPSK	19975	25RB#0	19.90	PASS
Band4	5MHz	16QAM	19975	25RB#0	19.89	PASS
Band4	5MHz	QPSK	20175	1RB#0	19.97	PASS
Band4	5MHz	16QAM	20175	1RB#0	19.84	PASS
Band4	5MHz	QPSK	20175	1RB#12	19.93	PASS
Band4	5MHz	16QAM	20175	1RB#12	19.78	PASS

Band4	5MHz	QPSK	20175	1RB#24	19.92	PASS
Band4	5MHz	16QAM	20175	1RB#24	19.81	PASS
Band4	5MHz	QPSK	20175	12RB#0	19.80	PASS
Band4	5MHz	16QAM	20175	12RB#0	19.82	PASS
Band4	5MHz	QPSK	20175	12RB#6	19.79	PASS
Band4	5MHz	16QAM	20175	12RB#6	19.83	PASS
Band4	5MHz	QPSK	20175	12RB#13	19.77	PASS
Band4	5MHz	16QAM	20175	12RB#13	19.79	PASS
Band4	5MHz	QPSK	20175	25RB#0	19.82	PASS
Band4	5MHz	16QAM	20175	25RB#0	19.82	PASS
Band4	5MHz	QPSK	20375	1RB#0	19.96	PASS
Band4	5MHz	16QAM	20375	1RB#0	19.85	PASS
Band4	5MHz	QPSK	20375	1RB#12	19.89	PASS
Band4	5MHz	16QAM	20375	1RB#12	19.78	PASS
Band4	5MHz	QPSK	20375	1RB#24	19.88	PASS
Band4	5MHz	16QAM	20375	1RB#24	19.77	PASS
Band4	5MHz	QPSK	20375	12RB#0	19.85	PASS
Band4	5MHz	16QAM	20375	12RB#0	19.85	PASS
Band4	5MHz	QPSK	20375	12RB#6	19.85	PASS
Band4	5MHz	16QAM	20375	12RB#6	19.85	PASS
Band4	5MHz	QPSK	20375	12RB#13	19.80	PASS
Band4	5MHz	16QAM	20375	12RB#13	19.78	PASS
Band4	5MHz	QPSK	20375	25RB#0	19.84	PASS
Band4	5MHz	16QAM	20375	25RB#0	19.83	PASS
Band4	10MHz	QPSK	20000	1RB#0	19.95	PASS
Band4	10MHz	16QAM	20000	1RB#0	19.90	PASS
Band4	10MHz	QPSK	20000	1RB#24	19.87	PASS
Band4	10MHz	16QAM	20000	1RB#24	19.85	PASS
Band4	10MHz	QPSK	20000	1RB#49	19.99	PASS
Band4	10MHz	16QAM	20000	1RB#49	19.98	PASS
Band4	10MHz	QPSK	20000	25RB#0	19.89	PASS
Band4	10MHz	16QAM	20000	25RB#0	19.84	PASS
Band4	10MHz	QPSK	20000	25RB#12	19.89	PASS
Band4	10MHz	16QAM	20000	25RB#12	19.88	PASS
Band4	10MHz	QPSK	20000	25RB#25	19.92	PASS
Band4	10MHz	16QAM	20000	25RB#25	19.90	PASS
Band4	10MHz	QPSK	20000	50RB#0	19.91	PASS
Band4	10MHz	16QAM	20000	50RB#0	19.86	PASS
Band4	10MHz	QPSK	20175	1RB#0	19.88	PASS
Band4	10MHz	16QAM	20175	1RB#0	19.85	PASS
Band4	10MHz	QPSK	20175	1RB#24	19.80	PASS
Band4	10MHz	16QAM	20175	1RB#24	19.81	PASS

Band4	10MHz	QPSK	20175	1RB#49	19.86	PASS
Band4	10MHz	16QAM	20175	1RB#49	19.83	PASS
Band4	10MHz	QPSK	20175	25RB#0	19.85	PASS
Band4	10MHz	16QAM	20175	25RB#0	19.79	PASS
Band4	10MHz	QPSK	20175	25RB#12	19.82	PASS
Band4	10MHz	16QAM	20175	25RB#12	19.79	PASS
Band4	10MHz	QPSK	20175	25RB#25	19.78	PASS
Band4	10MHz	16QAM	20175	25RB#25	19.74	PASS
Band4	10MHz	QPSK	20175	50RB#0	19.80	PASS
Band4	10MHz	16QAM	20175	50RB#0	19.78	PASS
Band4	10MHz	QPSK	20350	1RB#0	19.97	PASS
Band4	10MHz	16QAM	20350	1RB#0	19.93	PASS
Band4	10MHz	QPSK	20350	1RB#24	19.89	PASS
Band4	10MHz	16QAM	20350	1RB#24	19.82	PASS
Band4	10MHz	QPSK	20350	1RB#49	19.84	PASS
Band4	10MHz	16QAM	20350	1RB#49	19.83	PASS
Band4	10MHz	QPSK	20350	25RB#0	19.93	PASS
Band4	10MHz	16QAM	20350	25RB#0	19.87	PASS
Band4	10MHz	QPSK	20350	25RB#12	19.93	PASS
Band4	10MHz	16QAM	20350	25RB#12	19.88	PASS
Band4	10MHz	QPSK	20350	25RB#25	19.87	PASS
Band4	10MHz	16QAM	20350	25RB#25	19.83	PASS
Band4	10MHz	QPSK	20350	50RB#0	19.91	PASS
Band4	10MHz	16QAM	20350	50RB#0	19.87	PASS
Band4	15MHz	QPSK	20025	1RB#0	19.96	PASS
Band4	15MHz	16QAM	20025	1RB#0	19.96	PASS
Band4	15MHz	QPSK	20025	1RB#38	19.94	PASS
Band4	15MHz	16QAM	20025	1RB#38	19.89	PASS
Band4	15MHz	QPSK	20025	1RB#74	19.93	PASS
Band4	15MHz	16QAM	20025	1RB#74	19.95	PASS
Band4	15MHz	QPSK	20025	38RB#0	19.92	PASS
Band4	15MHz	16QAM	20025	38RB#0	19.93	PASS
Band4	15MHz	QPSK	20025	38RB#18	19.90	PASS
Band4	15MHz	16QAM	20025	38RB#18	19.92	PASS
Band4	15MHz	QPSK	20025	38RB#37	19.92	PASS
Band4	15MHz	16QAM	20025	38RB#37	19.92	PASS
Band4	15MHz	QPSK	20025	75RB#0	19.91	PASS
Band4	15MHz	16QAM	20025	75RB#0	19.91	PASS
Band4	15MHz	QPSK	20175	1RB#0	19.91	PASS
Band4	15MHz	16QAM	20175	1RB#0	19.89	PASS
Band4	15MHz	QPSK	20175	1RB#38	19.84	PASS
Band4	15MHz	16QAM	20175	1RB#38	19.88	PASS

Band4	15MHz	QPSK	20175	1RB#74	19.76	PASS
Band4	15MHz	16QAM	20175	1RB#74	19.77	PASS
Band4	15MHz	QPSK	20175	38RB#0	19.79	PASS
Band4	15MHz	16QAM	20175	38RB#0	19.81	PASS
Band4	15MHz	QPSK	20175	38RB#18	19.80	PASS
Band4	15MHz	16QAM	20175	38RB#18	19.80	PASS
Band4	15MHz	QPSK	20175	38RB#37	19.79	PASS
Band4	15MHz	16QAM	20175	38RB#37	19.80	PASS
Band4	15MHz	QPSK	20175	75RB#0	19.80	PASS
Band4	15MHz	16QAM	20175	75RB#0	19.75	PASS
Band4	15MHz	QPSK	20325	1RB#0	19.97	PASS
Band4	15MHz	16QAM	20325	1RB#0	20.01	PASS
Band4	15MHz	QPSK	20325	1RB#38	19.87	PASS
Band4	15MHz	16QAM	20325	1RB#38	19.84	PASS
Band4	15MHz	QPSK	20325	1RB#74	19.73	PASS
Band4	15MHz	16QAM	20325	1RB#74	19.70	PASS
Band4	15MHz	QPSK	20325	38RB#0	19.84	PASS
Band4	15MHz	16QAM	20325	38RB#0	19.83	PASS
Band4	15MHz	QPSK	20325	38RB#18	19.83	PASS
Band4	15MHz	16QAM	20325	38RB#18	19.83	PASS
Band4	15MHz	QPSK	20325	38RB#37	19.83	PASS
Band4	15MHz	16QAM	20325	38RB#37	19.84	PASS
Band4	15MHz	QPSK	20325	75RB#0	19.84	PASS
Band4	15MHz	16QAM	20325	75RB#0	19.81	PASS
Band4	20MHz	QPSK	20050	1RB#0	20.06	PASS
Band4	20MHz	16QAM	20050	1RB#0	19.92	PASS
Band4	20MHz	QPSK	20050	1RB#49	20.07	PASS
Band4	20MHz	16QAM	20050	1RB#49	19.93	PASS
Band4	20MHz	QPSK	20050	1RB#99	20.01	PASS
Band4	20MHz	16QAM	20050	1RB#99	19.86	PASS
Band4	20MHz	QPSK	20050	50RB#0	19.92	PASS
Band4	20MHz	16QAM	20050	50RB#0	19.89	PASS
Band4	20MHz	QPSK	20050	50RB#25	19.93	PASS
Band4	20MHz	16QAM	20050	50RB#25	19.90	PASS
Band4	20MHz	QPSK	20050	50RB#50	19.94	PASS
Band4	20MHz	16QAM	20050	50RB#50	19.92	PASS
Band4	20MHz	QPSK	20050	100RB#0	19.93	PASS
Band4	20MHz	16QAM	20050	100RB#0	19.90	PASS
Band4	20MHz	QPSK	20175	1RB#0	20.00	PASS
Band4	20MHz	16QAM	20175	1RB#0	19.85	PASS
Band4	20MHz	QPSK	20175	1RB#49	19.89	PASS
Band4	20MHz	16QAM	20175	1RB#49	19.78	PASS

Band4	20MHz	QPSK	20175	1RB#99	19.82	PASS
Band4	20MHz	16QAM	20175	1RB#99	19.71	PASS
Band4	20MHz	QPSK	20175	50RB#0	19.85	PASS
Band4	20MHz	16QAM	20175	50RB#0	19.85	PASS
Band4	20MHz	QPSK	20175	50RB#25	19.86	PASS
Band4	20MHz	16QAM	20175	50RB#25	19.86	PASS
Band4	20MHz	QPSK	20175	50RB#50	19.77	PASS
Band4	20MHz	16QAM	20175	50RB#50	19.76	PASS
Band4	20MHz	QPSK	20175	100RB#0	19.82	PASS
Band4	20MHz	16QAM	20175	100RB#0	19.79	PASS
Band4	20MHz	QPSK	20300	1RB#0	20.03	PASS
Band4	20MHz	16QAM	20300	1RB#0	19.93	PASS
Band4	20MHz	QPSK	20300	1RB#49	19.92	PASS
Band4	20MHz	16QAM	20300	1RB#49	19.78	PASS
Band4	20MHz	QPSK	20300	1RB#99	19.79	PASS
Band4	20MHz	16QAM	20300	1RB#99	19.68	PASS
Band4	20MHz	QPSK	20300	50RB#0	19.90	PASS
Band4	20MHz	16QAM	20300	50RB#0	19.87	PASS
Band4	20MHz	QPSK	20300	50RB#25	19.90	PASS
Band4	20MHz	16QAM	20300	50RB#25	19.87	PASS
Band4	20MHz	QPSK	20300	50RB#50	19.80	PASS
Band4	20MHz	16QAM	20300	50RB#50	19.81	PASS
Band4	20MHz	QPSK	20300	100RB#0	19.85	PASS
Band4	20MHz	16QAM	20300	100RB#0	19.80	PASS

LTE(P1):

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band5	1.4MHz	QPSK	20407	1RB#0	23.12	PASS
Band5	1.4MHz	16QAM	20407	1RB#0	22.23	PASS
Band5	1.4MHz	QPSK	20407	1RB#2	23.24	PASS
Band5	1.4MHz	16QAM	20407	1RB#2	22.56	PASS
Band5	1.4MHz	QPSK	20407	1RB#5	23.54	PASS
Band5	1.4MHz	16QAM	20407	1RB#5	22.45	PASS
Band5	1.4MHz	QPSK	20407	3RB#0	22.69	PASS
Band5	1.4MHz	16QAM	20407	3RB#0	21.57	PASS
Band5	1.4MHz	QPSK	20407	3RB#1	22.12	PASS
Band5	1.4MHz	16QAM	20407	3RB#1	21.35	PASS
Band5	1.4MHz	QPSK	20407	3RB#3	22.42	PASS
Band5	1.4MHz	16QAM	20407	3RB#3	21.25	PASS
Band5	1.4MHz	QPSK	20407	6RB#0	22.45	PASS
Band5	1.4MHz	16QAM	20407	6RB#0	21.65	PASS

Band5	1.4MHz	QPSK	20525	1RB#0	23.57	PASS
Band5	1.4MHz	16QAM	20525	1RB#0	22.58	PASS
Band5	1.4MHz	QPSK	20525	1RB#2	23.36	PASS
Band5	1.4MHz	16QAM	20525	1RB#2	22.42	PASS
Band5	1.4MHz	QPSK	20525	1RB#5	23.25	PASS
Band5	1.4MHz	16QAM	20525	1RB#5	22.34	PASS
Band5	1.4MHz	QPSK	20525	3RB#0	22.25	PASS
Band5	1.4MHz	16QAM	20525	3RB#0	21.45	PASS
Band5	1.4MHz	QPSK	20525	3RB#1	22.69	PASS
Band5	1.4MHz	16QAM	20525	3RB#1	21.44	PASS
Band5	1.4MHz	QPSK	20525	3RB#3	22.25	PASS
Band5	1.4MHz	16QAM	20525	3RB#3	21.45	PASS
Band5	1.4MHz	QPSK	20525	6RB#0	22.25	PASS
Band5	1.4MHz	16QAM	20525	6RB#0	21.36	PASS
Band5	1.4MHz	QPSK	20643	1RB#0	23.54	PASS
Band5	1.4MHz	16QAM	20643	1RB#0	22.51	PASS
Band5	1.4MHz	QPSK	20643	1RB#2	23.39	PASS
Band5	1.4MHz	16QAM	20643	1RB#2	22.41	PASS
Band5	1.4MHz	QPSK	20643	1RB#5	23.12	PASS
Band5	1.4MHz	16QAM	20643	1RB#5	22.22	PASS
Band5	1.4MHz	QPSK	20643	3RB#0	22.26	PASS
Band5	1.4MHz	16QAM	20643	3RB#0	21.54	PASS
Band5	1.4MHz	QPSK	20643	3RB#1	22.56	PASS
Band5	1.4MHz	16QAM	20643	3RB#1	22.24	PASS
Band5	1.4MHz	QPSK	20643	3RB#3	23.49	PASS
Band5	1.4MHz	16QAM	20643	3RB#3	22.16	PASS
Band5	1.4MHz	QPSK	20643	6RB#0	22.48	PASS
Band5	1.4MHz	16QAM	20643	6RB#0	21.41	PASS
Band5	3MHz	QPSK	20415	1RB#0	23.68	PASS
Band5	3MHz	16QAM	20415	1RB#0	22.66	PASS
Band5	3MHz	QPSK	20415	1RB#8	23.64	PASS
Band5	3MHz	16QAM	20415	1RB#8	22.58	PASS
Band5	3MHz	QPSK	20415	1RB#14	23.64	PASS
Band5	3MHz	16QAM	20415	1RB#14	22.61	PASS
Band5	3MHz	QPSK	20415	8RB#0	22.67	PASS
Band5	3MHz	16QAM	20415	8RB#0	21.67	PASS
Band5	3MHz	QPSK	20415	8RB#4	22.65	PASS
Band5	3MHz	16QAM	20415	8RB#4	21.66	PASS
Band5	3MHz	QPSK	20415	8RB#7	22.63	PASS
Band5	3MHz	16QAM	20415	8RB#7	21.62	PASS
Band5	3MHz	QPSK	20415	15RB#0	22.61	PASS
Band5	3MHz	16QAM	20415	15RB#0	21.59	PASS

Band5	3MHz	QPSK	20525	1RB#0	23.58	PASS
Band5	3MHz	16QAM	20525	1RB#0	22.41	PASS
Band5	3MHz	QPSK	20525	1RB#8	23.50	PASS
Band5	3MHz	16QAM	20525	1RB#8	22.29	PASS
Band5	3MHz	QPSK	20525	1RB#14	23.50	PASS
Band5	3MHz	16QAM	20525	1RB#14	22.28	PASS
Band5	3MHz	QPSK	20525	8RB#0	22.49	PASS
Band5	3MHz	16QAM	20525	8RB#0	21.46	PASS
Band5	3MHz	QPSK	20525	8RB#4	22.48	PASS
Band5	3MHz	16QAM	20525	8RB#4	21.46	PASS
Band5	3MHz	QPSK	20525	8RB#7	22.40	PASS
Band5	3MHz	16QAM	20525	8RB#7	21.42	PASS
Band5	3MHz	QPSK	20525	15RB#0	22.44	PASS
Band5	3MHz	16QAM	20525	15RB#0	21.35	PASS
Band5	3MHz	QPSK	20635	1RB#0	23.47	PASS
Band5	3MHz	16QAM	20635	1RB#0	22.43	PASS
Band5	3MHz	QPSK	20635	1RB#8	23.48	PASS
Band5	3MHz	16QAM	20635	1RB#8	22.43	PASS
Band5	3MHz	QPSK	20635	1RB#14	23.53	PASS
Band5	3MHz	16QAM	20635	1RB#14	22.49	PASS
Band5	3MHz	QPSK	20635	8RB#0	22.50	PASS
Band5	3MHz	16QAM	20635	8RB#0	21.55	PASS
Band5	3MHz	QPSK	20635	8RB#4	22.49	PASS
Band5	3MHz	16QAM	20635	8RB#4	21.52	PASS
Band5	3MHz	QPSK	20635	8RB#7	22.49	PASS
Band5	3MHz	16QAM	20635	8RB#7	21.48	PASS
Band5	3MHz	QPSK	20635	15RB#0	22.48	PASS
Band5	3MHz	16QAM	20635	15RB#0	21.46	PASS
Band5	5MHz	QPSK	20425	1RB#0	23.90	PASS
Band5	5MHz	16QAM	20425	1RB#0	22.75	PASS
Band5	5MHz	QPSK	20425	1RB#12	23.82	PASS
Band5	5MHz	16QAM	20425	1RB#12	22.66	PASS
Band5	5MHz	QPSK	20425	1RB#24	23.82	PASS
Band5	5MHz	16QAM	20425	1RB#24	22.69	PASS
Band5	5MHz	QPSK	20425	12RB#0	22.73	PASS
Band5	5MHz	16QAM	20425	12RB#0	21.70	PASS
Band5	5MHz	QPSK	20425	12RB#6	22.73	PASS
Band5	5MHz	16QAM	20425	12RB#6	21.70	PASS
Band5	5MHz	QPSK	20425	12RB#13	22.69	PASS
Band5	5MHz	16QAM	20425	12RB#13	21.66	PASS
Band5	5MHz	QPSK	20425	25RB#0	22.71	PASS
Band5	5MHz	16QAM	20425	25RB#0	21.72	PASS

Band5	5MHz	QPSK	20525	1RB#0	23.67	PASS
Band5	5MHz	16QAM	20525	1RB#0	22.71	PASS
Band5	5MHz	QPSK	20525	1RB#12	23.56	PASS
Band5	5MHz	16QAM	20525	1RB#12	22.61	PASS
Band5	5MHz	QPSK	20525	1RB#24	23.55	PASS
Band5	5MHz	16QAM	20525	1RB#24	22.59	PASS
Band5	5MHz	QPSK	20525	12RB#0	22.59	PASS
Band5	5MHz	16QAM	20525	12RB#0	21.61	PASS
Band5	5MHz	QPSK	20525	12RB#6	22.58	PASS
Band5	5MHz	16QAM	20525	12RB#6	21.64	PASS
Band5	5MHz	QPSK	20525	12RB#13	22.48	PASS
Band5	5MHz	16QAM	20525	12RB#13	21.52	PASS
Band5	5MHz	QPSK	20525	25RB#0	22.56	PASS
Band5	5MHz	16QAM	20525	25RB#0	21.46	PASS
Band5	5MHz	QPSK	20625	1RB#0	23.63	PASS
Band5	5MHz	16QAM	20625	1RB#0	22.51	PASS
Band5	5MHz	QPSK	20625	1RB#12	23.60	PASS
Band5	5MHz	16QAM	20625	1RB#12	22.47	PASS
Band5	5MHz	QPSK	20625	1RB#24	23.71	PASS
Band5	5MHz	16QAM	20625	1RB#24	22.56	PASS
Band5	5MHz	QPSK	20625	12RB#0	22.55	PASS
Band5	5MHz	16QAM	20625	12RB#0	21.51	PASS
Band5	5MHz	QPSK	20625	12RB#6	22.55	PASS
Band5	5MHz	16QAM	20625	12RB#6	21.54	PASS
Band5	5MHz	QPSK	20625	12RB#13	22.51	PASS
Band5	5MHz	16QAM	20625	12RB#13	21.50	PASS
Band5	5MHz	QPSK	20625	25RB#0	22.55	PASS
Band5	5MHz	16QAM	20625	25RB#0	21.52	PASS
Band5	10MHz	QPSK	20450	1RB#0	23.93	PASS
Band5	10MHz	16QAM	20450	1RB#0	22.76	PASS
Band5	10MHz	QPSK	20450	1RB#24	23.64	PASS
Band5	10MHz	16QAM	20450	1RB#24	22.63	PASS
Band5	10MHz	QPSK	20450	1RB#49	23.68	PASS
Band5	10MHz	16QAM	20450	1RB#49	22.67	PASS
Band5	10MHz	QPSK	20450	25RB#0	22.67	PASS
Band5	10MHz	16QAM	20450	25RB#0	21.64	PASS
Band5	10MHz	QPSK	20450	25RB#12	22.67	PASS
Band5	10MHz	16QAM	20450	25RB#12	21.64	PASS
Band5	10MHz	QPSK	20450	25RB#25	22.64	PASS
Band5	10MHz	16QAM	20450	25RB#25	21.58	PASS
Band5	10MHz	QPSK	20450	50RB#0	22.66	PASS
Band5	10MHz	16QAM	20450	50RB#0	21.64	PASS

Band5	10MHz	QPSK	20525	1RB#0	23.70	PASS
Band5	10MHz	16QAM	20525	1RB#0	22.55	PASS
Band5	10MHz	QPSK	20525	1RB#24	23.55	PASS
Band5	10MHz	16QAM	20525	1RB#24	22.40	PASS
Band5	10MHz	QPSK	20525	1RB#49	23.51	PASS
Band5	10MHz	16QAM	20525	1RB#49	22.35	PASS
Band5	10MHz	QPSK	20525	25RB#0	22.60	PASS
Band5	10MHz	16QAM	20525	25RB#0	21.57	PASS
Band5	10MHz	QPSK	20525	25RB#12	22.59	PASS
Band5	10MHz	16QAM	20525	25RB#12	21.57	PASS
Band5	10MHz	QPSK	20525	25RB#25	22.46	PASS
Band5	10MHz	16QAM	20525	25RB#25	21.43	PASS
Band5	10MHz	QPSK	20525	50RB#0	22.53	PASS
Band5	10MHz	16QAM	20525	50RB#0	21.50	PASS
Band5	10MHz	QPSK	20600	1RB#0	23.57	PASS
Band5	10MHz	16QAM	20600	1RB#0	22.56	PASS
Band5	10MHz	QPSK	20600	1RB#24	23.49	PASS
Band5	10MHz	16QAM	20600	1RB#24	22.45	PASS
Band5	10MHz	QPSK	20600	1RB#49	23.63	PASS
Band5	10MHz	16QAM	20600	1RB#49	22.61	PASS
Band5	10MHz	QPSK	20600	25RB#0	22.51	PASS
Band5	10MHz	16QAM	20600	25RB#0	21.47	PASS
Band5	10MHz	QPSK	20600	25RB#12	22.50	PASS
Band5	10MHz	16QAM	20600	25RB#12	21.46	PASS
Band5	10MHz	QPSK	20600	25RB#25	22.49	PASS
Band5	10MHz	16QAM	20600	25RB#25	21.42	PASS
Band5	10MHz	QPSK	20600	50RB#0	22.53	PASS
Band5	10MHz	16QAM	20600	50RB#0	21.51	PASS

LTE(P1):

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band7	5MHz	QPSK	20775	1RB#0	22.73	PASS
Band7	5MHz	16QAM	20775	1RB#0	21.60	PASS
Band7	5MHz	QPSK	20775	1RB#12	22.71	PASS
Band7	5MHz	16QAM	20775	1RB#12	21.56	PASS
Band7	5MHz	QPSK	20775	1RB#24	22.75	PASS
Band7	5MHz	16QAM	20775	1RB#24	21.61	PASS
Band7	5MHz	QPSK	20775	12RB#0	21.62	PASS
Band7	5MHz	16QAM	20775	12RB#0	20.63	PASS
Band7	5MHz	QPSK	20775	12RB#6	21.63	PASS
Band7	5MHz	16QAM	20775	12RB#6	20.62	PASS

Band7	5MHz	QPSK	20775	12RB#13	21.58	PASS
Band7	5MHz	16QAM	20775	12RB#13	20.59	PASS
Band7	5MHz	QPSK	20775	25RB#0	21.66	PASS
Band7	5MHz	16QAM	20775	25RB#0	20.63	PASS
Band7	5MHz	QPSK	21100	1RB#0	22.77	PASS
Band7	5MHz	16QAM	21100	1RB#0	21.76	PASS
Band7	5MHz	QPSK	21100	1RB#12	22.73	PASS
Band7	5MHz	16QAM	21100	1RB#12	21.81	PASS
Band7	5MHz	QPSK	21100	1RB#24	22.81	PASS
Band7	5MHz	16QAM	21100	1RB#24	21.88	PASS
Band7	5MHz	QPSK	21100	12RB#0	21.69	PASS
Band7	5MHz	16QAM	21100	12RB#0	20.79	PASS
Band7	5MHz	QPSK	21100	12RB#6	21.69	PASS
Band7	5MHz	16QAM	21100	12RB#6	20.78	PASS
Band7	5MHz	QPSK	21100	12RB#13	21.72	PASS
Band7	5MHz	16QAM	21100	12RB#13	20.81	PASS
Band7	5MHz	QPSK	21100	25RB#0	21.76	PASS
Band7	5MHz	16QAM	21100	25RB#0	20.72	PASS
Band7	5MHz	QPSK	21425	1RB#0	22.82	PASS
Band7	5MHz	16QAM	21425	1RB#0	21.67	PASS
Band7	5MHz	QPSK	21425	1RB#12	22.73	PASS
Band7	5MHz	16QAM	21425	1RB#12	21.60	PASS
Band7	5MHz	QPSK	21425	1RB#24	22.79	PASS
Band7	5MHz	16QAM	21425	1RB#24	21.61	PASS
Band7	5MHz	QPSK	21425	12RB#0	21.74	PASS
Band7	5MHz	16QAM	21425	12RB#0	20.71	PASS
Band7	5MHz	QPSK	21425	12RB#6	21.70	PASS
Band7	5MHz	16QAM	21425	12RB#6	20.72	PASS
Band7	5MHz	QPSK	21425	12RB#13	21.66	PASS
Band7	5MHz	16QAM	21425	12RB#13	20.69	PASS
Band7	5MHz	QPSK	21425	25RB#0	21.73	PASS
Band7	5MHz	16QAM	21425	25RB#0	20.73	PASS
Band7	10MHz	QPSK	20800	1RB#0	22.68	PASS
Band7	10MHz	16QAM	20800	1RB#0	21.71	PASS
Band7	10MHz	QPSK	20800	1RB#24	22.61	PASS
Band7	10MHz	16QAM	20800	1RB#24	21.55	PASS
Band7	10MHz	QPSK	20800	1RB#49	22.66	PASS
Band7	10MHz	16QAM	20800	1RB#49	21.61	PASS
Band7	10MHz	QPSK	20800	25RB#0	21.65	PASS
Band7	10MHz	16QAM	20800	25RB#0	20.62	PASS
Band7	10MHz	QPSK	20800	25RB#12	21.64	PASS
Band7	10MHz	16QAM	20800	25RB#12	20.62	PASS

Band7	10MHz	QPSK	20800	25RB#25	21.64	PASS
Band7	10MHz	16QAM	20800	25RB#25	20.61	PASS
Band7	10MHz	QPSK	20800	50RB#0	21.64	PASS
Band7	10MHz	16QAM	20800	50RB#0	20.61	PASS
Band7	10MHz	QPSK	21100	1RB#0	22.73	PASS
Band7	10MHz	16QAM	21100	1RB#0	21.64	PASS
Band7	10MHz	QPSK	21100	1RB#24	22.67	PASS
Band7	10MHz	16QAM	21100	1RB#24	21.54	PASS
Band7	10MHz	QPSK	21100	1RB#49	22.73	PASS
Band7	10MHz	16QAM	21100	1RB#49	21.68	PASS
Band7	10MHz	QPSK	21100	25RB#0	21.73	PASS
Band7	10MHz	16QAM	21100	25RB#0	20.73	PASS
Band7	10MHz	QPSK	21100	25RB#12	21.74	PASS
Band7	10MHz	16QAM	21100	25RB#12	20.71	PASS
Band7	10MHz	QPSK	21100	25RB#25	21.76	PASS
Band7	10MHz	16QAM	21100	25RB#25	20.78	PASS
Band7	10MHz	QPSK	21100	50RB#0	21.74	PASS
Band7	10MHz	16QAM	21100	50RB#0	20.72	PASS
Band7	10MHz	QPSK	21400	1RB#0	22.80	PASS
Band7	10MHz	16QAM	21400	1RB#0	21.58	PASS
Band7	10MHz	QPSK	21400	1RB#24	22.66	PASS
Band7	10MHz	16QAM	21400	1RB#24	21.44	PASS
Band7	10MHz	QPSK	21400	1RB#49	22.68	PASS
Band7	10MHz	16QAM	21400	1RB#49	21.49	PASS
Band7	10MHz	QPSK	21400	25RB#0	21.77	PASS
Band7	10MHz	16QAM	21400	25RB#0	20.77	PASS
Band7	10MHz	QPSK	21400	25RB#12	21.78	PASS
Band7	10MHz	16QAM	21400	25RB#12	20.77	PASS
Band7	10MHz	QPSK	21400	25RB#25	21.68	PASS
Band7	10MHz	16QAM	21400	25RB#25	20.71	PASS
Band7	10MHz	QPSK	21400	50RB#0	21.72	PASS
Band7	10MHz	16QAM	21400	50RB#0	20.72	PASS
Band7	15MHz	QPSK	20825	1RB#0	22.79	PASS
Band7	15MHz	16QAM	20825	1RB#0	21.72	PASS
Band7	15MHz	QPSK	20825	1RB#38	22.64	PASS
Band7	15MHz	16QAM	20825	1RB#38	21.71	PASS
Band7	15MHz	QPSK	20825	1RB#74	22.61	PASS
Band7	15MHz	16QAM	20825	1RB#74	21.64	PASS
Band7	15MHz	QPSK	20825	38RB#0	21.65	PASS
Band7	15MHz	16QAM	20825	38RB#0	21.64	PASS
Band7	15MHz	QPSK	20825	38RB#18	21.65	PASS
Band7	15MHz	16QAM	20825	38RB#18	21.64	PASS

Band7	15MHz	QPSK	20825	38RB#37	21.65	PASS
Band7	15MHz	16QAM	20825	38RB#37	21.65	PASS
Band7	15MHz	QPSK	20825	75RB#0	21.64	PASS
Band7	15MHz	16QAM	20825	75RB#0	20.64	PASS
Band7	15MHz	QPSK	21100	1RB#0	22.71	PASS
Band7	15MHz	16QAM	21100	1RB#0	21.81	PASS
Band7	15MHz	QPSK	21100	1RB#38	22.73	PASS
Band7	15MHz	16QAM	21100	1RB#38	21.85	PASS
Band7	15MHz	QPSK	21100	1RB#74	22.78	PASS
Band7	15MHz	16QAM	21100	1RB#74	21.91	PASS
Band7	15MHz	QPSK	21100	38RB#0	21.74	PASS
Band7	15MHz	16QAM	21100	38RB#0	21.75	PASS
Band7	15MHz	QPSK	21100	38RB#18	21.75	PASS
Band7	15MHz	16QAM	21100	38RB#18	21.75	PASS
Band7	15MHz	QPSK	21100	38RB#37	21.76	PASS
Band7	15MHz	16QAM	21100	38RB#37	21.76	PASS
Band7	15MHz	QPSK	21100	75RB#0	21.74	PASS
Band7	15MHz	16QAM	21100	75RB#0	20.77	PASS
Band7	15MHz	QPSK	21375	1RB#0	22.83	PASS
Band7	15MHz	16QAM	21375	1RB#0	21.61	PASS
Band7	15MHz	QPSK	21375	1RB#38	22.75	PASS
Band7	15MHz	16QAM	21375	1RB#38	21.54	PASS
Band7	15MHz	QPSK	21375	1RB#74	22.70	PASS
Band7	15MHz	16QAM	21375	1RB#74	21.45	PASS
Band7	15MHz	QPSK	21375	38RB#0	21.77	PASS
Band7	15MHz	16QAM	21375	38RB#0	21.74	PASS
Band7	15MHz	QPSK	21375	38RB#18	21.77	PASS
Band7	15MHz	16QAM	21375	38RB#18	21.75	PASS
Band7	15MHz	QPSK	21375	38RB#37	21.75	PASS
Band7	15MHz	16QAM	21375	38RB#37	21.74	PASS
Band7	15MHz	QPSK	21375	75RB#0	21.75	PASS
Band7	15MHz	16QAM	21375	75RB#0	20.77	PASS
Band7	20MHz	QPSK	20850	1RB#0	22.78	PASS
Band7	20MHz	16QAM	20850	1RB#0	21.65	PASS
Band7	20MHz	QPSK	20850	1RB#49	22.74	PASS
Band7	20MHz	16QAM	20850	1RB#49	21.56	PASS
Band7	20MHz	QPSK	20850	1RB#99	22.67	PASS
Band7	20MHz	16QAM	20850	1RB#99	21.56	PASS
Band7	20MHz	QPSK	20850	50RB#0	21.69	PASS
Band7	20MHz	16QAM	20850	50RB#0	20.69	PASS
Band7	20MHz	QPSK	20850	50RB#25	21.69	PASS
Band7	20MHz	16QAM	20850	50RB#25	20.67	PASS

Band7	20MHz	QPSK	20850	50RB#50	21.59	PASS
Band7	20MHz	16QAM	20850	50RB#50	20.57	PASS
Band7	20MHz	QPSK	20850	100RB#0	21.63	PASS
Band7	20MHz	16QAM	20850	100RB#0	20.60	PASS
Band7	20MHz	QPSK	21100	1RB#0	22.76	PASS
Band7	20MHz	16QAM	21100	1RB#0	21.92	PASS
Band7	20MHz	QPSK	21100	1RB#49	22.79	PASS
Band7	20MHz	16QAM	21100	1RB#49	22.05	PASS
Band7	20MHz	QPSK	21100	1RB#99	22.86	PASS
Band7	20MHz	16QAM	21100	1RB#99	22.10	PASS
Band7	20MHz	QPSK	21100	50RB#0	21.76	PASS
Band7	20MHz	16QAM	21100	50RB#0	20.75	PASS
Band7	20MHz	QPSK	21100	50RB#25	21.77	PASS
Band7	20MHz	16QAM	21100	50RB#25	20.77	PASS
Band7	20MHz	QPSK	21100	50RB#50	21.84	PASS
Band7	20MHz	16QAM	21100	50RB#50	20.83	PASS
Band7	20MHz	QPSK	21100	100RB#0	21.78	PASS
Band7	20MHz	16QAM	21100	100RB#0	20.77	PASS
Band7	20MHz	QPSK	21350	1RB#0	22.81	PASS
Band7	20MHz	16QAM	21350	1RB#0	21.77	PASS
Band7	20MHz	QPSK	21350	1RB#49	22.71	PASS
Band7	20MHz	16QAM	21350	1RB#49	21.68	PASS
Band7	20MHz	QPSK	21350	1RB#99	22.66	PASS
Band7	20MHz	16QAM	21350	1RB#99	21.61	PASS
Band7	20MHz	QPSK	21350	50RB#0	21.88	PASS
Band7	20MHz	16QAM	21350	50RB#0	20.90	PASS
Band7	20MHz	QPSK	21350	50RB#25	21.87	PASS
Band7	20MHz	16QAM	21350	50RB#25	20.90	PASS
Band7	20MHz	QPSK	21350	50RB#50	21.76	PASS
Band7	20MHz	16QAM	21350	50RB#50	20.78	PASS
Band7	20MHz	QPSK	21350	100RB#0	21.81	PASS
Band7	20MHz	16QAM	21350	100RB#0	20.79	PASS

LTE(P4): Sensor ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band7	5MHz	QPSK	20775	1RB#0	20.56	PASS
Band7	5MHz	16QAM	20775	1RB#0	20.74	PASS
Band7	5MHz	QPSK	20775	1RB#12	20.46	PASS
Band7	5MHz	16QAM	20775	1RB#12	20.36	PASS
Band7	5MHz	QPSK	20775	1RB#24	20.54	PASS
Band7	5MHz	16QAM	20775	1RB#24	20.45	PASS

Band7	5MHz	QPSK	20775	12RB#0	20.45	PASS
Band7	5MHz	16QAM	20775	12RB#0	20.36	PASS
Band7	5MHz	QPSK	20775	12RB#6	20.57	PASS
Band7	5MHz	16QAM	20775	12RB#6	20.57	PASS
Band7	5MHz	QPSK	20775	12RB#13	20.56	PASS
Band7	5MHz	16QAM	20775	12RB#13	20.36	PASS
Band7	5MHz	QPSK	20775	25RB#0	20.54	PASS
Band7	5MHz	16QAM	20775	25RB#0	20.58	PASS
Band7	5MHz	QPSK	21100	1RB#0	20.69	PASS
Band7	5MHz	16QAM	21100	1RB#0	20.74	PASS
Band7	5MHz	QPSK	21100	1RB#12	20.55	PASS
Band7	5MHz	16QAM	21100	1RB#12	20.36	PASS
Band7	5MHz	QPSK	21100	1RB#24	20.57	PASS
Band7	5MHz	16QAM	21100	1RB#24	20.54	PASS
Band7	5MHz	QPSK	21100	12RB#0	20.36	PASS
Band7	5MHz	16QAM	21100	12RB#0	20.54	PASS
Band7	5MHz	QPSK	21100	12RB#6	20.28	PASS
Band7	5MHz	16QAM	21100	12RB#6	20.74	PASS
Band7	5MHz	QPSK	21100	12RB#13	20.71	PASS
Band7	5MHz	16QAM	21100	12RB#13	20.66	PASS
Band7	5MHz	QPSK	21100	25RB#0	20.25	PASS
Band7	5MHz	16QAM	21100	25RB#0	20.61	PASS
Band7	5MHz	QPSK	21425	1RB#0	20.62	PASS
Band7	5MHz	16QAM	21425	1RB#0	20.55	PASS
Band7	5MHz	QPSK	21425	1RB#12	20.56	PASS
Band7	5MHz	16QAM	21425	1RB#12	20.46	PASS
Band7	5MHz	QPSK	21425	1RB#24	20.56	PASS
Band7	5MHz	16QAM	21425	1RB#24	20.43	PASS
Band7	5MHz	QPSK	21425	12RB#0	20.64	PASS
Band7	5MHz	16QAM	21425	12RB#0	20.61	PASS
Band7	5MHz	QPSK	21425	12RB#6	20.54	PASS
Band7	5MHz	16QAM	21425	12RB#6	20.65	PASS
Band7	5MHz	QPSK	21425	12RB#13	20.45	PASS
Band7	5MHz	16QAM	21425	12RB#13	20.41	PASS
Band7	5MHz	QPSK	21425	25RB#0	20.42	PASS
Band7	5MHz	16QAM	21425	25RB#0	20.47	PASS
Band7	10MHz	QPSK	20800	1RB#0	20.46	PASS
Band7	10MHz	16QAM	20800	1RB#0	20.42	PASS
Band7	10MHz	QPSK	20800	1RB#24	20.46	PASS
Band7	10MHz	16QAM	20800	1RB#24	20.49	PASS
Band7	10MHz	QPSK	20800	1RB#49	20.41	PASS
Band7	10MHz	16QAM	20800	1RB#49	20.40	PASS

Band7	10MHz	QPSK	20800	25RB#0	20.46	PASS
Band7	10MHz	16QAM	20800	25RB#0	20.45	PASS
Band7	10MHz	QPSK	20800	25RB#12	20.46	PASS
Band7	10MHz	16QAM	20800	25RB#12	20.41	PASS
Band7	10MHz	QPSK	20800	25RB#25	20.51	PASS
Band7	10MHz	16QAM	20800	25RB#25	20.45	PASS
Band7	10MHz	QPSK	20800	50RB#0	20.36	PASS
Band7	10MHz	16QAM	20800	50RB#0	20.45	PASS
Band7	10MHz	QPSK	21100	1RB#0	20.48	PASS
Band7	10MHz	16QAM	21100	1RB#0	20.45	PASS
Band7	10MHz	QPSK	21100	1RB#24	20.42	PASS
Band7	10MHz	16QAM	21100	1RB#24	20.58	PASS
Band7	10MHz	QPSK	21100	1RB#49	20.42	PASS
Band7	10MHz	16QAM	21100	1RB#49	20.53	PASS
Band7	10MHz	QPSK	21100	25RB#0	20.61	PASS
Band7	10MHz	16QAM	21100	25RB#0	20.74	PASS
Band7	10MHz	QPSK	21100	25RB#12	20.56	PASS
Band7	10MHz	16QAM	21100	25RB#12	20.58	PASS
Band7	10MHz	QPSK	21100	25RB#25	20.69	PASS
Band7	10MHz	16QAM	21100	25RB#25	20.57	PASS
Band7	10MHz	QPSK	21100	50RB#0	20.45	PASS
Band7	10MHz	16QAM	21100	50RB#0	20.64	PASS
Band7	10MHz	QPSK	21400	1RB#0	20.58	PASS
Band7	10MHz	16QAM	21400	1RB#0	20.45	PASS
Band7	10MHz	QPSK	21400	1RB#24	20.54	PASS
Band7	10MHz	16QAM	21400	1RB#24	20.45	PASS
Band7	10MHz	QPSK	21400	1RB#49	20.65	PASS
Band7	10MHz	16QAM	21400	1RB#49	20.45	PASS
Band7	10MHz	QPSK	21400	25RB#0	20.25	PASS
Band7	10MHz	16QAM	21400	25RB#0	20.57	PASS
Band7	10MHz	QPSK	21400	25RB#12	20.45	PASS
Band7	10MHz	16QAM	21400	25RB#12	20.56	PASS
Band7	10MHz	QPSK	21400	25RB#25	20.57	PASS
Band7	10MHz	16QAM	21400	25RB#25	20.64	PASS
Band7	10MHz	QPSK	21400	50RB#0	20.74	PASS
Band7	10MHz	16QAM	21400	50RB#0	20.26	PASS
Band7	15MHz	QPSK	20825	1RB#0	20.35	PASS
Band7	15MHz	16QAM	20825	1RB#0	20.45	PASS
Band7	15MHz	QPSK	20825	1RB#38	20.48	PASS
Band7	15MHz	16QAM	20825	1RB#38	20.46	PASS
Band7	15MHz	QPSK	20825	1RB#74	20.54	PASS
Band7	15MHz	16QAM	20825	1RB#74	20.28	PASS

Band7	15MHz	QPSK	20825	38RB#0	20.46	PASS
Band7	15MHz	16QAM	20825	38RB#0	20.36	PASS
Band7	15MHz	QPSK	20825	38RB#18	20.28	PASS
Band7	15MHz	16QAM	20825	38RB#18	20.45	PASS
Band7	15MHz	QPSK	20825	38RB#37	20.37	PASS
Band7	15MHz	16QAM	20825	38RB#37	20.45	PASS
Band7	15MHz	QPSK	20825	75RB#0	20.36	PASS
Band7	15MHz	16QAM	20825	75RB#0	20.42	PASS
Band7	15MHz	QPSK	21100	1RB#0	20.53	PASS
Band7	15MHz	16QAM	21100	1RB#0	20.46	PASS
Band7	15MHz	QPSK	21100	1RB#38	20.67	PASS
Band7	15MHz	16QAM	21100	1RB#38	20.67	PASS
Band7	15MHz	QPSK	21100	1RB#74	20.56	PASS
Band7	15MHz	16QAM	21100	1RB#74	20.75	PASS
Band7	15MHz	QPSK	21100	38RB#0	20.63	PASS
Band7	15MHz	16QAM	21100	38RB#0	20.72	PASS
Band7	15MHz	QPSK	21100	38RB#18	20.71	PASS
Band7	15MHz	16QAM	21100	38RB#18	20.65	PASS
Band7	15MHz	QPSK	21100	38RB#37	20.75	PASS
Band7	15MHz	16QAM	21100	38RB#37	20.67	PASS
Band7	15MHz	QPSK	21100	75RB#0	20.65	PASS
Band7	15MHz	16QAM	21100	75RB#0	20.72	PASS
Band7	15MHz	QPSK	21375	1RB#0	20.78	PASS
Band7	15MHz	16QAM	21375	1RB#0	20.62	PASS
Band7	15MHz	QPSK	21375	1RB#38	20.72	PASS
Band7	15MHz	16QAM	21375	1RB#38	20.46	PASS
Band7	15MHz	QPSK	21375	1RB#74	20.45	PASS
Band7	15MHz	16QAM	21375	1RB#74	20.53	PASS
Band7	15MHz	QPSK	21375	38RB#0	20.54	PASS
Band7	15MHz	16QAM	21375	38RB#0	20.74	PASS
Band7	15MHz	QPSK	21375	38RB#18	20.56	PASS
Band7	15MHz	16QAM	21375	38RB#18	20.56	PASS
Band7	15MHz	QPSK	21375	38RB#37	20.42	PASS
Band7	15MHz	16QAM	21375	38RB#37	20.56	PASS
Band7	15MHz	QPSK	21375	75RB#0	20.57	PASS
Band7	15MHz	16QAM	21375	75RB#0	20.45	PASS
Band7	20MHz	QPSK	20850	1RB#0	20.56	PASS
Band7	20MHz	16QAM	20850	1RB#0	20.45	PASS
Band7	20MHz	QPSK	20850	1RB#49	20.46	PASS
Band7	20MHz	16QAM	20850	1RB#49	20.54	PASS
Band7	20MHz	QPSK	20850	1RB#99	20.57	PASS
Band7	20MHz	16QAM	20850	1RB#99	20.56	PASS

Band7	20MHz	QPSK	20850	50RB#0	20.57	PASS
Band7	20MHz	16QAM	20850	50RB#0	20.57	PASS
Band7	20MHz	QPSK	20850	50RB#25	20.56	PASS
Band7	20MHz	16QAM	20850	50RB#25	20.51	PASS
Band7	20MHz	QPSK	20850	50RB#50	20.56	PASS
Band7	20MHz	16QAM	20850	50RB#50	20.36	PASS
Band7	20MHz	QPSK	20850	100RB#0	20.54	PASS
Band7	20MHz	16QAM	20850	100RB#0	20.54	PASS
Band7	20MHz	QPSK	21100	1RB#0	20.67	PASS
Band7	20MHz	16QAM	21100	1RB#0	20.84	PASS
Band7	20MHz	QPSK	21100	1RB#49	20.76	PASS
Band7	20MHz	16QAM	21100	1RB#49	20.84	PASS
Band7	20MHz	QPSK	21100	1RB#99	20.61	PASS
Band7	20MHz	16QAM	21100	1RB#99	20.56	PASS
Band7	20MHz	QPSK	21100	50RB#0	20.58	PASS
Band7	20MHz	16QAM	21100	50RB#0	20.45	PASS
Band7	20MHz	QPSK	21100	50RB#25	20.36	PASS
Band7	20MHz	16QAM	21100	50RB#25	20.57	PASS
Band7	20MHz	QPSK	21100	50RB#50	20.45	PASS
Band7	20MHz	16QAM	21100	50RB#50	20.58	PASS
Band7	20MHz	QPSK	21100	100RB#0	20.45	PASS
Band7	20MHz	16QAM	21100	100RB#0	20.65	PASS
Band7	20MHz	QPSK	21350	1RB#0	20.74	PASS
Band7	20MHz	16QAM	21350	1RB#0	20.58	PASS
Band7	20MHz	QPSK	21350	1RB#49	20.36	PASS
Band7	20MHz	16QAM	21350	1RB#49	20.54	PASS
Band7	20MHz	QPSK	21350	1RB#99	20.87	PASS
Band7	20MHz	16QAM	21350	1RB#99	20.48	PASS
Band7	20MHz	QPSK	21350	50RB#0	20.71	PASS
Band7	20MHz	16QAM	21350	50RB#0	20.65	PASS
Band7	20MHz	QPSK	21350	50RB#25	20.57	PASS
Band7	20MHz	16QAM	21350	50RB#25	20.45	PASS
Band7	20MHz	QPSK	21350	50RB#50	20.58	PASS
Band7	20MHz	16QAM	21350	50RB#50	20.65	PASS
Band7	20MHz	QPSK	21350	100RB#0	20.74	PASS
Band7	20MHz	16QAM	21350	100RB#0	20.76	PASS

LTE(P3): Hotspot ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band7	5MHz	QPSK	20775	1RB#0	20.62	PASS
Band7	5MHz	16QAM	20775	1RB#0	20.47	PASS

Band7	5MHz	QPSK	20775	1RB#12	20.56	PASS
Band7	5MHz	16QAM	20775	1RB#12	20.44	PASS
Band7	5MHz	QPSK	20775	1RB#24	20.60	PASS
Band7	5MHz	16QAM	20775	1RB#24	20.47	PASS
Band7	5MHz	QPSK	20775	12RB#0	20.51	PASS
Band7	5MHz	16QAM	20775	12RB#0	20.54	PASS
Band7	5MHz	QPSK	20775	12RB#6	20.51	PASS
Band7	5MHz	16QAM	20775	12RB#6	20.53	PASS
Band7	5MHz	QPSK	20775	12RB#13	20.47	PASS
Band7	5MHz	16QAM	20775	12RB#13	20.49	PASS
Band7	5MHz	QPSK	20775	25RB#0	20.55	PASS
Band7	5MHz	16QAM	20775	25RB#0	20.53	PASS
Band7	5MHz	QPSK	21100	1RB#0	20.78	PASS
Band7	5MHz	16QAM	21100	1RB#0	20.81	PASS
Band7	5MHz	QPSK	21100	1RB#12	20.72	PASS
Band7	5MHz	16QAM	21100	1RB#12	20.78	PASS
Band7	5MHz	QPSK	21100	1RB#24	20.80	PASS
Band7	5MHz	16QAM	21100	1RB#24	20.84	PASS
Band7	5MHz	QPSK	21100	12RB#0	20.71	PASS
Band7	5MHz	16QAM	21100	12RB#0	20.81	PASS
Band7	5MHz	QPSK	21100	12RB#6	20.74	PASS
Band7	5MHz	16QAM	21100	12RB#6	20.82	PASS
Band7	5MHz	QPSK	21100	12RB#13	20.72	PASS
Band7	5MHz	16QAM	21100	12RB#13	20.81	PASS
Band7	5MHz	QPSK	21100	25RB#0	20.76	PASS
Band7	5MHz	16QAM	21100	25RB#0	20.74	PASS
Band7	5MHz	QPSK	21425	1RB#0	20.77	PASS
Band7	5MHz	16QAM	21425	1RB#0	20.63	PASS
Band7	5MHz	QPSK	21425	1RB#12	20.69	PASS
Band7	5MHz	16QAM	21425	1RB#12	20.56	PASS
Band7	5MHz	QPSK	21425	1RB#24	20.69	PASS
Band7	5MHz	16QAM	21425	1RB#24	20.58	PASS
Band7	5MHz	QPSK	21425	12RB#0	20.70	PASS
Band7	5MHz	16QAM	21425	12RB#0	20.72	PASS
Band7	5MHz	QPSK	21425	12RB#6	20.69	PASS
Band7	5MHz	16QAM	21425	12RB#6	20.74	PASS
Band7	5MHz	QPSK	21425	12RB#13	20.65	PASS
Band7	5MHz	16QAM	21425	12RB#13	20.65	PASS
Band7	5MHz	QPSK	21425	25RB#0	20.69	PASS
Band7	5MHz	16QAM	21425	25RB#0	20.69	PASS
Band7	10MHz	QPSK	20800	1RB#0	20.59	PASS
Band7	10MHz	16QAM	20800	1RB#0	20.57	PASS

Band7	10MHz	QPSK	20800	1RB#24	20.51	PASS
Band7	10MHz	16QAM	20800	1RB#24	20.48	PASS
Band7	10MHz	QPSK	20800	1RB#49	20.54	PASS
Band7	10MHz	16QAM	20800	1RB#49	20.53	PASS
Band7	10MHz	QPSK	20800	25RB#0	20.56	PASS
Band7	10MHz	16QAM	20800	25RB#0	20.53	PASS
Band7	10MHz	QPSK	20800	25RB#12	20.56	PASS
Band7	10MHz	16QAM	20800	25RB#12	20.55	PASS
Band7	10MHz	QPSK	20800	25RB#25	20.55	PASS
Band7	10MHz	16QAM	20800	25RB#25	20.49	PASS
Band7	10MHz	QPSK	20800	50RB#0	20.55	PASS
Band7	10MHz	16QAM	20800	50RB#0	20.54	PASS
Band7	10MHz	QPSK	21100	1RB#0	20.87	PASS
Band7	10MHz	16QAM	21100	1RB#0	20.71	PASS
Band7	10MHz	QPSK	21100	1RB#24	20.78	PASS
Band7	10MHz	16QAM	21100	1RB#24	20.63	PASS
Band7	10MHz	QPSK	21100	1RB#49	20.85	PASS
Band7	10MHz	16QAM	21100	1RB#49	20.71	PASS
Band7	10MHz	QPSK	21100	25RB#0	20.79	PASS
Band7	10MHz	16QAM	21100	25RB#0	20.80	PASS
Band7	10MHz	QPSK	21100	25RB#12	20.80	PASS
Band7	10MHz	16QAM	21100	25RB#12	20.79	PASS
Band7	10MHz	QPSK	21100	25RB#25	20.81	PASS
Band7	10MHz	16QAM	21100	25RB#25	20.82	PASS
Band7	10MHz	QPSK	21100	50RB#0	20.80	PASS
Band7	10MHz	16QAM	21100	50RB#0	20.80	PASS
Band7	10MHz	QPSK	21400	1RB#0	20.86	PASS
Band7	10MHz	16QAM	21400	1RB#0	20.61	PASS
Band7	10MHz	QPSK	21400	1RB#24	20.71	PASS
Band7	10MHz	16QAM	21400	1RB#24	20.50	PASS
Band7	10MHz	QPSK	21400	1RB#49	20.71	PASS
Band7	10MHz	16QAM	21400	1RB#49	20.45	PASS
Band7	10MHz	QPSK	21400	25RB#0	20.80	PASS
Band7	10MHz	16QAM	21400	25RB#0	20.78	PASS
Band7	10MHz	QPSK	21400	25RB#12	20.76	PASS
Band7	10MHz	16QAM	21400	25RB#12	20.82	PASS
Band7	10MHz	QPSK	21400	25RB#25	20.72	PASS
Band7	10MHz	16QAM	21400	25RB#25	20.71	PASS
Band7	10MHz	QPSK	21400	50RB#0	20.76	PASS
Band7	10MHz	16QAM	21400	50RB#0	20.75	PASS
Band7	15MHz	QPSK	20825	1RB#0	20.61	PASS
Band7	15MHz	16QAM	20825	1RB#0	20.58	PASS

Band7	15MHz	QPSK	20825	1RB#38	20.51	PASS
Band7	15MHz	16QAM	20825	1RB#38	20.50	PASS
Band7	15MHz	QPSK	20825	1RB#74	20.52	PASS
Band7	15MHz	16QAM	20825	1RB#74	20.54	PASS
Band7	15MHz	QPSK	20825	38RB#0	20.52	PASS
Band7	15MHz	16QAM	20825	38RB#0	20.51	PASS
Band7	15MHz	QPSK	20825	38RB#18	20.51	PASS
Band7	15MHz	16QAM	20825	38RB#18	20.51	PASS
Band7	15MHz	QPSK	20825	38RB#37	20.52	PASS
Band7	15MHz	16QAM	20825	38RB#37	20.51	PASS
Band7	15MHz	QPSK	20825	75RB#0	20.51	PASS
Band7	15MHz	16QAM	20825	75RB#0	20.49	PASS
Band7	15MHz	QPSK	21100	1RB#0	20.67	PASS
Band7	15MHz	16QAM	21100	1RB#0	20.80	PASS
Band7	15MHz	QPSK	21100	1RB#38	20.70	PASS
Band7	15MHz	16QAM	21100	1RB#38	20.86	PASS
Band7	15MHz	QPSK	21100	1RB#74	20.65	PASS
Band7	15MHz	16QAM	21100	1RB#74	20.82	PASS
Band7	15MHz	QPSK	21100	38RB#0	20.75	PASS
Band7	15MHz	16QAM	21100	38RB#0	20.75	PASS
Band7	15MHz	QPSK	21100	38RB#18	20.75	PASS
Band7	15MHz	16QAM	21100	38RB#18	20.75	PASS
Band7	15MHz	QPSK	21100	38RB#37	20.75	PASS
Band7	15MHz	16QAM	21100	38RB#37	20.76	PASS
Band7	15MHz	QPSK	21100	75RB#0	20.74	PASS
Band7	15MHz	16QAM	21100	75RB#0	20.78	PASS
Band7	15MHz	QPSK	21375	1RB#0	20.89	PASS
Band7	15MHz	16QAM	21375	1RB#0	20.64	PASS
Band7	15MHz	QPSK	21375	1RB#38	20.75	PASS
Band7	15MHz	16QAM	21375	1RB#38	20.53	PASS
Band7	15MHz	QPSK	21375	1RB#74	20.68	PASS
Band7	15MHz	16QAM	21375	1RB#74	20.40	PASS
Band7	15MHz	QPSK	21375	38RB#0	20.76	PASS
Band7	15MHz	16QAM	21375	38RB#0	20.76	PASS
Band7	15MHz	QPSK	21375	38RB#18	20.76	PASS
Band7	15MHz	16QAM	21375	38RB#18	20.76	PASS
Band7	15MHz	QPSK	21375	38RB#37	20.76	PASS
Band7	15MHz	16QAM	21375	38RB#37	20.74	PASS
Band7	15MHz	QPSK	21375	75RB#0	20.76	PASS
Band7	15MHz	16QAM	21375	75RB#0	20.77	PASS
Band7	20MHz	QPSK	20850	1RB#0	20.65	PASS
Band7	20MHz	16QAM	20850	1RB#0	20.54	PASS

Band7	20MHz	QPSK	20850	1RB#49	20.61	PASS
Band7	20MHz	16QAM	20850	1RB#49	20.51	PASS
Band7	20MHz	QPSK	20850	1RB#99	20.67	PASS
Band7	20MHz	16QAM	20850	1RB#99	20.53	PASS
Band7	20MHz	QPSK	20850	50RB#0	20.60	PASS
Band7	20MHz	16QAM	20850	50RB#0	20.58	PASS
Band7	20MHz	QPSK	20850	50RB#25	20.60	PASS
Band7	20MHz	16QAM	20850	50RB#25	20.58	PASS
Band7	20MHz	QPSK	20850	50RB#50	20.56	PASS
Band7	20MHz	16QAM	20850	50RB#50	20.56	PASS
Band7	20MHz	QPSK	20850	100RB#0	20.58	PASS
Band7	20MHz	16QAM	20850	100RB#0	20.56	PASS
Band7	20MHz	QPSK	21100	1RB#0	20.75	PASS
Band7	20MHz	16QAM	21100	1RB#0	20.96	PASS
Band7	20MHz	QPSK	21100	1RB#49	20.84	PASS
Band7	20MHz	16QAM	21100	1RB#49	20.93	PASS
Band7	20MHz	QPSK	21100	1RB#99	20.77	PASS
Band7	20MHz	16QAM	21100	1RB#99	20.88	PASS
Band7	20MHz	QPSK	21100	50RB#0	20.83	PASS
Band7	20MHz	16QAM	21100	50RB#0	20.84	PASS
Band7	20MHz	QPSK	21100	50RB#25	20.83	PASS
Band7	20MHz	16QAM	21100	50RB#25	20.83	PASS
Band7	20MHz	QPSK	21100	50RB#50	20.84	PASS
Band7	20MHz	16QAM	21100	50RB#50	20.84	PASS
Band7	20MHz	QPSK	21100	100RB#0	20.84	PASS
Band7	20MHz	16QAM	21100	100RB#0	20.81	PASS
Band7	20MHz	QPSK	21350	1RB#0	20.86	PASS
Band7	20MHz	16QAM	21350	1RB#0	20.74	PASS
Band7	20MHz	QPSK	21350	1RB#49	20.79	PASS
Band7	20MHz	16QAM	21350	1RB#49	20.66	PASS
Band7	20MHz	QPSK	21350	1RB#99	20.65	PASS
Band7	20MHz	16QAM	21350	1RB#99	20.51	PASS
Band7	20MHz	QPSK	21350	50RB#0	20.89	PASS
Band7	20MHz	16QAM	21350	50RB#0	20.94	PASS
Band7	20MHz	QPSK	21350	50RB#25	20.87	PASS
Band7	20MHz	16QAM	21350	50RB#25	20.94	PASS
Band7	20MHz	QPSK	21350	50RB#50	20.78	PASS
Band7	20MHz	16QAM	21350	50RB#50	20.79	PASS
Band7	20MHz	QPSK	21350	100RB#0	20.82	PASS
Band7	20MHz	16QAM	21350	100RB#0	20.82	PASS

LTE(P1):

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band12	1.4MHz	QPSK	23017	1RB#0	23.13	PASS
Band12	1.4MHz	16QAM	23017	1RB#0	22.09	PASS
Band12	1.4MHz	QPSK	23017	1RB#2	23.16	PASS
Band12	1.4MHz	16QAM	23017	1RB#2	22.13	PASS
Band12	1.4MHz	QPSK	23017	1RB#5	23.21	PASS
Band12	1.4MHz	16QAM	23017	1RB#5	22.12	PASS
Band12	1.4MHz	QPSK	23017	3RB#0	23.16	PASS
Band12	1.4MHz	16QAM	23017	3RB#0	22.01	PASS
Band12	1.4MHz	QPSK	23017	3RB#1	23.17	PASS
Band12	1.4MHz	16QAM	23017	3RB#1	22.00	PASS
Band12	1.4MHz	QPSK	23017	3RB#3	23.18	PASS
Band12	1.4MHz	16QAM	23017	3RB#3	22.01	PASS
Band12	1.4MHz	QPSK	23017	6RB#0	22.26	PASS
Band12	1.4MHz	16QAM	23017	6RB#0	21.23	PASS
Band12	1.4MHz	QPSK	23095	1RB#0	23.42	PASS
Band12	1.4MHz	16QAM	23095	1RB#0	22.24	PASS
Band12	1.4MHz	QPSK	23095	1RB#2	23.36	PASS
Band12	1.4MHz	16QAM	23095	1RB#2	22.24	PASS
Band12	1.4MHz	QPSK	23095	1RB#5	23.43	PASS
Band12	1.4MHz	16QAM	23095	1RB#5	22.26	PASS
Band12	1.4MHz	QPSK	23095	3RB#0	23.42	PASS
Band12	1.4MHz	16QAM	23095	3RB#0	22.20	PASS
Band12	1.4MHz	QPSK	23095	3RB#1	23.39	PASS
Band12	1.4MHz	16QAM	23095	3RB#1	22.21	PASS
Band12	1.4MHz	QPSK	23095	3RB#3	23.42	PASS
Band12	1.4MHz	16QAM	23095	3RB#3	22.21	PASS
Band12	1.4MHz	QPSK	23095	6RB#0	22.36	PASS
Band12	1.4MHz	16QAM	23095	6RB#0	21.22	PASS
Band12	1.4MHz	QPSK	23173	1RB#0	23.37	PASS
Band12	1.4MHz	16QAM	23173	1RB#0	22.33	PASS
Band12	1.4MHz	QPSK	23173	1RB#2	23.33	PASS
Band12	1.4MHz	16QAM	23173	1RB#2	22.36	PASS
Band12	1.4MHz	QPSK	23173	1RB#5	23.34	PASS
Band12	1.4MHz	16QAM	23173	1RB#5	22.31	PASS
Band12	1.4MHz	QPSK	23173	3RB#0	23.38	PASS
Band12	1.4MHz	16QAM	23173	3RB#0	22.25	PASS
Band12	1.4MHz	QPSK	23173	3RB#1	23.39	PASS
Band12	1.4MHz	16QAM	23173	3RB#1	22.21	PASS
Band12	1.4MHz	QPSK	23173	3RB#3	23.38	PASS

Band12	1.4MHz	16QAM	23173	3RB#3	22.26	PASS
Band12	1.4MHz	QPSK	23173	6RB#0	22.41	PASS
Band12	1.4MHz	16QAM	23173	6RB#0	21.42	PASS
Band12	3MHz	QPSK	23025	1RB#0	23.30	PASS
Band12	3MHz	16QAM	23025	1RB#0	22.28	PASS
Band12	3MHz	QPSK	23025	1RB#8	23.38	PASS
Band12	3MHz	16QAM	23025	1RB#8	22.31	PASS
Band12	3MHz	QPSK	23025	1RB#14	23.39	PASS
Band12	3MHz	16QAM	23025	1RB#14	22.36	PASS
Band12	3MHz	QPSK	23025	8RB#0	22.36	PASS
Band12	3MHz	16QAM	23025	8RB#0	21.35	PASS
Band12	3MHz	QPSK	23025	8RB#4	22.37	PASS
Band12	3MHz	16QAM	23025	8RB#4	21.36	PASS
Band12	3MHz	QPSK	23025	8RB#7	22.38	PASS
Band12	3MHz	16QAM	23025	8RB#7	21.37	PASS
Band12	3MHz	QPSK	23025	15RB#0	22.37	PASS
Band12	3MHz	16QAM	23025	15RB#0	21.39	PASS
Band12	3MHz	QPSK	23095	1RB#0	23.49	PASS
Band12	3MHz	16QAM	23095	1RB#0	22.34	PASS
Band12	3MHz	QPSK	23095	1RB#8	23.44	PASS
Band12	3MHz	16QAM	23095	1RB#8	22.22	PASS
Band12	3MHz	QPSK	23095	1RB#14	23.46	PASS
Band12	3MHz	16QAM	23095	1RB#14	22.28	PASS
Band12	3MHz	QPSK	23095	8RB#0	22.40	PASS
Band12	3MHz	16QAM	23095	8RB#0	21.40	PASS
Band12	3MHz	QPSK	23095	8RB#4	22.40	PASS
Band12	3MHz	16QAM	23095	8RB#4	21.41	PASS
Band12	3MHz	QPSK	23095	8RB#7	22.39	PASS
Band12	3MHz	16QAM	23095	8RB#7	21.36	PASS
Band12	3MHz	QPSK	23095	15RB#0	22.40	PASS
Band12	3MHz	16QAM	23095	15RB#0	21.29	PASS
Band12	3MHz	QPSK	23165	1RB#0	23.49	PASS
Band12	3MHz	16QAM	23165	1RB#0	22.48	PASS
Band12	3MHz	QPSK	23165	1RB#8	23.45	PASS
Band12	3MHz	16QAM	23165	1RB#8	22.40	PASS
Band12	3MHz	QPSK	23165	1RB#14	23.47	PASS
Band12	3MHz	16QAM	23165	1RB#14	22.51	PASS
Band12	3MHz	QPSK	23165	8RB#0	22.47	PASS
Band12	3MHz	16QAM	23165	8RB#0	21.52	PASS
Band12	3MHz	QPSK	23165	8RB#4	22.47	PASS
Band12	3MHz	16QAM	23165	8RB#4	21.46	PASS
Band12	3MHz	QPSK	23165	8RB#7	22.42	PASS

Band12	3MHz	16QAM	23165	8RB#7	21.42	PASS
Band12	3MHz	QPSK	23165	15RB#0	22.47	PASS
Band12	3MHz	16QAM	23165	15RB#0	21.46	PASS
Band12	5MHz	QPSK	23035	1RB#0	23.55	PASS
Band12	5MHz	16QAM	23035	1RB#0	22.38	PASS
Band12	5MHz	QPSK	23035	1RB#12	23.56	PASS
Band12	5MHz	16QAM	23035	1RB#12	22.40	PASS
Band12	5MHz	QPSK	23035	1RB#24	23.58	PASS
Band12	5MHz	16QAM	23035	1RB#24	22.45	PASS
Band12	5MHz	QPSK	23035	12RB#0	22.43	PASS
Band12	5MHz	16QAM	23035	12RB#0	21.40	PASS
Band12	5MHz	QPSK	23035	12RB#6	22.43	PASS
Band12	5MHz	16QAM	23035	12RB#6	21.41	PASS
Band12	5MHz	QPSK	23035	12RB#13	22.43	PASS
Band12	5MHz	16QAM	23035	12RB#13	21.42	PASS
Band12	5MHz	QPSK	23035	25RB#0	22.46	PASS
Band12	5MHz	16QAM	23035	25RB#0	21.43	PASS
Band12	5MHz	QPSK	23095	1RB#0	23.45	PASS
Band12	5MHz	16QAM	23095	1RB#0	22.50	PASS
Band12	5MHz	QPSK	23095	1RB#12	23.55	PASS
Band12	5MHz	16QAM	23095	1RB#12	22.53	PASS
Band12	5MHz	QPSK	23095	1RB#24	23.54	PASS
Band12	5MHz	16QAM	23095	1RB#24	22.56	PASS
Band12	5MHz	QPSK	23095	12RB#0	22.45	PASS
Band12	5MHz	16QAM	23095	12RB#0	21.52	PASS
Band12	5MHz	QPSK	23095	12RB#6	22.47	PASS
Band12	5MHz	16QAM	23095	12RB#6	21.53	PASS
Band12	5MHz	QPSK	23095	12RB#13	22.45	PASS
Band12	5MHz	16QAM	23095	12RB#13	21.52	PASS
Band12	5MHz	QPSK	23095	25RB#0	22.48	PASS
Band12	5MHz	16QAM	23095	25RB#0	21.43	PASS
Band12	5MHz	QPSK	23155	1RB#0	23.68	PASS
Band12	5MHz	16QAM	23155	1RB#0	22.52	PASS
Band12	5MHz	QPSK	23155	1RB#12	23.66	PASS
Band12	5MHz	16QAM	23155	1RB#12	22.48	PASS
Band12	5MHz	QPSK	23155	1RB#24	23.72	PASS
Band12	5MHz	16QAM	23155	1RB#24	22.52	PASS
Band12	5MHz	QPSK	23155	12RB#0	22.51	PASS
Band12	5MHz	16QAM	23155	12RB#0	21.52	PASS
Band12	5MHz	QPSK	23155	12RB#6	22.50	PASS
Band12	5MHz	16QAM	23155	12RB#6	21.49	PASS
Band12	5MHz	QPSK	23155	12RB#13	22.46	PASS

Band12	5MHz	16QAM	23155	12RB#13	21.45	PASS
Band12	5MHz	QPSK	23155	25RB#0	22.51	PASS
Band12	5MHz	16QAM	23155	25RB#0	21.51	PASS
Band12	10MHz	QPSK	23060	1RB#0	23.44	PASS
Band12	10MHz	16QAM	23060	1RB#0	22.43	PASS
Band12	10MHz	QPSK	23060	1RB#24	23.43	PASS
Band12	10MHz	16QAM	23060	1RB#24	22.42	PASS
Band12	10MHz	QPSK	23060	1RB#49	23.74	PASS
Band12	10MHz	16QAM	23060	1RB#49	22.52	PASS
Band12	10MHz	QPSK	23060	25RB#0	22.44	PASS
Band12	10MHz	16QAM	23060	25RB#0	21.42	PASS
Band12	10MHz	QPSK	23060	25RB#12	22.43	PASS
Band12	10MHz	16QAM	23060	25RB#12	21.39	PASS
Band12	10MHz	QPSK	23060	25RB#25	22.47	PASS
Band12	10MHz	16QAM	23060	25RB#25	21.45	PASS
Band12	10MHz	QPSK	23060	50RB#0	22.44	PASS
Band12	10MHz	16QAM	23060	50RB#0	21.41	PASS
Band12	10MHz	QPSK	23095	1RB#0	23.51	PASS
Band12	10MHz	16QAM	23095	1RB#0	22.39	PASS
Band12	10MHz	QPSK	23095	1RB#24	23.48	PASS
Band12	10MHz	16QAM	23095	1RB#24	22.35	PASS
Band12	10MHz	QPSK	23095	1RB#49	23.56	PASS
Band12	10MHz	16QAM	23095	1RB#49	22.44	PASS
Band12	10MHz	QPSK	23095	25RB#0	22.46	PASS
Band12	10MHz	16QAM	23095	25RB#0	21.44	PASS
Band12	10MHz	QPSK	23095	25RB#12	22.45	PASS
Band12	10MHz	16QAM	23095	25RB#12	21.43	PASS
Band12	10MHz	QPSK	23095	25RB#25	22.49	PASS
Band12	10MHz	16QAM	23095	25RB#25	21.48	PASS
Band12	10MHz	QPSK	23095	50RB#0	22.45	PASS
Band12	10MHz	16QAM	23095	50RB#0	21.43	PASS
Band12	10MHz	QPSK	23130	1RB#0	23.54	PASS
Band12	10MHz	16QAM	23130	1RB#0	22.30	PASS
Band12	10MHz	QPSK	23130	1RB#24	23.46	PASS
Band12	10MHz	16QAM	23130	1RB#24	22.23	PASS
Band12	10MHz	QPSK	23130	1RB#49	23.50	PASS
Band12	10MHz	16QAM	23130	1RB#49	22.35	PASS
Band12	10MHz	QPSK	23130	25RB#0	22.48	PASS
Band12	10MHz	16QAM	23130	25RB#0	21.49	PASS
Band12	10MHz	QPSK	23130	25RB#12	22.47	PASS
Band12	10MHz	16QAM	23130	25RB#12	21.47	PASS
Band12	10MHz	QPSK	23130	25RB#25	22.40	PASS

Band12	10MHz	16QAM	23130	25RB#25	21.44	PASS
Band12	10MHz	QPSK	23130	50RB#0	22.48	PASS
Band12	10MHz	16QAM	23130	50RB#0	21.44	PASS

LTE(P1):

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band13	5MHz	QPSK	23205	1RB#0	23.62	PASS
Band13	5MHz	16QAM	23205	1RB#0	22.50	PASS
Band13	5MHz	QPSK	23205	1RB#12	23.69	PASS
Band13	5MHz	16QAM	23205	1RB#12	22.51	PASS
Band13	5MHz	QPSK	23205	1RB#24	23.67	PASS
Band13	5MHz	16QAM	23205	1RB#24	22.51	PASS
Band13	5MHz	QPSK	23205	12RB#0	22.54	PASS
Band13	5MHz	16QAM	23205	12RB#0	21.53	PASS
Band13	5MHz	QPSK	23205	12RB#6	22.55	PASS
Band13	5MHz	16QAM	23205	12RB#6	21.51	PASS
Band13	5MHz	QPSK	23205	12RB#13	22.51	PASS
Band13	5MHz	16QAM	23205	12RB#13	21.48	PASS
Band13	5MHz	QPSK	23205	25RB#0	22.58	PASS
Band13	5MHz	16QAM	23205	25RB#0	21.57	PASS
Band13	5MHz	QPSK	23230	1RB#0	23.60	PASS
Band13	5MHz	16QAM	23230	1RB#0	22.63	PASS
Band13	5MHz	QPSK	23230	1RB#12	23.53	PASS
Band13	5MHz	16QAM	23230	1RB#12	22.56	PASS
Band13	5MHz	QPSK	23230	1RB#24	23.53	PASS
Band13	5MHz	16QAM	23230	1RB#24	22.60	PASS
Band13	5MHz	QPSK	23230	12RB#0	22.52	PASS
Band13	5MHz	16QAM	23230	12RB#0	21.58	PASS
Band13	5MHz	QPSK	23230	12RB#6	22.51	PASS
Band13	5MHz	16QAM	23230	12RB#6	21.57	PASS
Band13	5MHz	QPSK	23230	12RB#13	22.48	PASS
Band13	5MHz	16QAM	23230	12RB#13	21.57	PASS
Band13	5MHz	QPSK	23230	25RB#0	22.53	PASS
Band13	5MHz	16QAM	23230	25RB#0	21.46	PASS
Band13	5MHz	QPSK	23255	1RB#0	23.59	PASS
Band13	5MHz	16QAM	23255	1RB#0	22.46	PASS
Band13	5MHz	QPSK	23255	1RB#12	23.52	PASS
Band13	5MHz	16QAM	23255	1RB#12	22.38	PASS
Band13	5MHz	QPSK	23255	1RB#24	23.55	PASS
Band13	5MHz	16QAM	23255	1RB#24	22.39	PASS

Band13	5MHz	QPSK	23255	12RB#0	22.52	PASS
Band13	5MHz	16QAM	23255	12RB#0	21.53	PASS
Band13	5MHz	QPSK	23255	12RB#6	22.55	PASS
Band13	5MHz	16QAM	23255	12RB#6	21.55	PASS
Band13	5MHz	QPSK	23255	12RB#13	22.44	PASS
Band13	5MHz	16QAM	23255	12RB#13	21.47	PASS
Band13	5MHz	QPSK	23255	25RB#0	22.51	PASS
Band13	5MHz	16QAM	23255	25RB#0	21.51	PASS
Band13	10MHz	QPSK	23230	1RB#0	23.78	PASS
Band13	10MHz	16QAM	23230	1RB#0	22.58	PASS
Band13	10MHz	QPSK	23230	1RB#24	23.51	PASS
Band13	10MHz	16QAM	23230	1RB#24	22.50	PASS
Band13	10MHz	QPSK	23230	1RB#49	23.53	PASS
Band13	10MHz	16QAM	23230	1RB#49	22.55	PASS
Band13	10MHz	QPSK	23230	25RB#0	22.56	PASS
Band13	10MHz	16QAM	23230	25RB#0	21.53	PASS
Band13	10MHz	QPSK	23230	25RB#12	22.58	PASS
Band13	10MHz	16QAM	23230	25RB#12	21.50	PASS
Band13	10MHz	QPSK	23230	25RB#25	22.52	PASS
Band13	10MHz	16QAM	23230	25RB#25	21.48	PASS
Band13	10MHz	QPSK	23230	50RB#0	22.53	PASS
Band13	10MHz	16QAM	23230	50RB#0	21.49	PASS

LTE(P1):

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band17	5MHz	QPSK	23755	1RB#0	23.60	PASS
Band17	5MHz	16QAM	23755	1RB#0	22.46	PASS
Band17	5MHz	QPSK	23755	1RB#12	23.58	PASS
Band17	5MHz	16QAM	23755	1RB#12	22.39	PASS
Band17	5MHz	QPSK	23755	1RB#24	23.67	PASS
Band17	5MHz	16QAM	23755	1RB#24	22.50	PASS
Band17	5MHz	QPSK	23755	12RB#0	22.42	PASS
Band17	5MHz	16QAM	23755	12RB#0	21.43	PASS
Band17	5MHz	QPSK	23755	12RB#6	22.41	PASS
Band17	5MHz	16QAM	23755	12RB#6	21.41	PASS
Band17	5MHz	QPSK	23755	12RB#13	22.43	PASS
Band17	5MHz	16QAM	23755	12RB#13	21.45	PASS
Band17	5MHz	QPSK	23755	25RB#0	22.47	PASS
Band17	5MHz	16QAM	23755	25RB#0	21.46	PASS
Band17	5MHz	QPSK	23790	1RB#0	23.51	PASS
Band17	5MHz	16QAM	23790	1RB#0	22.50	PASS

Band17	5MHz	QPSK	23790	1RB#12	23.50	PASS
Band17	5MHz	16QAM	23790	1RB#12	22.54	PASS
Band17	5MHz	QPSK	23790	1RB#24	23.56	PASS
Band17	5MHz	16QAM	23790	1RB#24	22.58	PASS
Band17	5MHz	QPSK	23790	12RB#0	22.49	PASS
Band17	5MHz	16QAM	23790	12RB#0	21.57	PASS
Band17	5MHz	QPSK	23790	12RB#6	22.50	PASS
Band17	5MHz	16QAM	23790	12RB#6	21.58	PASS
Band17	5MHz	QPSK	23790	12RB#13	22.44	PASS
Band17	5MHz	16QAM	23790	12RB#13	21.54	PASS
Band17	5MHz	QPSK	23790	25RB#0	22.52	PASS
Band17	5MHz	16QAM	23790	25RB#0	21.46	PASS
Band17	5MHz	QPSK	23825	1RB#0	23.69	PASS
Band17	5MHz	16QAM	23825	1RB#0	22.54	PASS
Band17	5MHz	QPSK	23825	1RB#12	23.67	PASS
Band17	5MHz	16QAM	23825	1RB#12	22.50	PASS
Band17	5MHz	QPSK	23825	1RB#24	23.75	PASS
Band17	5MHz	16QAM	23825	1RB#24	22.56	PASS
Band17	5MHz	QPSK	23825	12RB#0	22.56	PASS
Band17	5MHz	16QAM	23825	12RB#0	21.53	PASS
Band17	5MHz	QPSK	23825	12RB#6	22.53	PASS
Band17	5MHz	16QAM	23825	12RB#6	21.53	PASS
Band17	5MHz	QPSK	23825	12RB#13	22.44	PASS
Band17	5MHz	16QAM	23825	12RB#13	21.47	PASS
Band17	5MHz	QPSK	23825	25RB#0	22.57	PASS
Band17	5MHz	16QAM	23825	25RB#0	21.57	PASS
Band17	10MHz	QPSK	23780	1RB#0	23.79	PASS
Band17	10MHz	16QAM	23780	1RB#0	22.50	PASS
Band17	10MHz	QPSK	23780	1RB#24	23.49	PASS
Band17	10MHz	16QAM	23780	1RB#24	22.54	PASS
Band17	10MHz	QPSK	23780	1RB#49	23.61	PASS
Band17	10MHz	16QAM	23780	1RB#49	22.63	PASS
Band17	10MHz	QPSK	23780	25RB#0	22.46	PASS
Band17	10MHz	16QAM	23780	25RB#0	21.45	PASS
Band17	10MHz	QPSK	23780	25RB#12	22.45	PASS
Band17	10MHz	16QAM	23780	25RB#12	21.43	PASS
Band17	10MHz	QPSK	23780	25RB#25	22.50	PASS
Band17	10MHz	16QAM	23780	25RB#25	21.43	PASS
Band17	10MHz	QPSK	23780	50RB#0	22.45	PASS
Band17	10MHz	16QAM	23780	50RB#0	21.44	PASS
Band17	10MHz	QPSK	23790	1RB#0	23.49	PASS
Band17	10MHz	16QAM	23790	1RB#0	22.40	PASS

Band17	10MHz	QPSK	23790	1RB#24	23.49	PASS
Band17	10MHz	16QAM	23790	1RB#24	22.34	PASS
Band17	10MHz	QPSK	23790	1RB#49	23.54	PASS
Band17	10MHz	16QAM	23790	1RB#49	22.42	PASS
Band17	10MHz	QPSK	23790	25RB#0	22.47	PASS
Band17	10MHz	16QAM	23790	25RB#0	21.44	PASS
Band17	10MHz	QPSK	23790	25RB#12	22.47	PASS
Band17	10MHz	16QAM	23790	25RB#12	21.45	PASS
Band17	10MHz	QPSK	23790	25RB#25	22.47	PASS
Band17	10MHz	16QAM	23790	25RB#25	21.49	PASS
Band17	10MHz	QPSK	23790	50RB#0	22.47	PASS
Band17	10MHz	16QAM	23790	50RB#0	21.48	PASS
Band17	10MHz	QPSK	23800	1RB#0	23.59	PASS
Band17	10MHz	16QAM	23800	1RB#0	22.36	PASS
Band17	10MHz	QPSK	23800	1RB#24	23.51	PASS
Band17	10MHz	16QAM	23800	1RB#24	22.25	PASS
Band17	10MHz	QPSK	23800	1RB#49	23.52	PASS
Band17	10MHz	16QAM	23800	1RB#49	22.31	PASS
Band17	10MHz	QPSK	23800	25RB#0	22.52	PASS
Band17	10MHz	16QAM	23800	25RB#0	21.50	PASS
Band17	10MHz	QPSK	23800	25RB#12	22.49	PASS
Band17	10MHz	16QAM	23800	25RB#12	21.50	PASS
Band17	10MHz	QPSK	23800	25RB#25	22.48	PASS
Band17	10MHz	16QAM	23800	25RB#25	21.49	PASS
Band17	10MHz	QPSK	23800	50RB#0	22.48	PASS
Band17	10MHz	16QAM	23800	50RB#0	21.48	PASS

LTE(P1):

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band25	1.4MHz	QPSK	26047	1RB#0	22.23	PASS
Band25	1.4MHz	16QAM	26047	1RB#0	21.22	PASS
Band25	1.4MHz	QPSK	26047	1RB#2	22.20	PASS
Band25	1.4MHz	16QAM	26047	1RB#2	21.25	PASS
Band25	1.4MHz	QPSK	26047	1RB#5	22.22	PASS
Band25	1.4MHz	16QAM	26047	1RB#5	21.17	PASS
Band25	1.4MHz	QPSK	26047	3RB#0	22.26	PASS
Band25	1.4MHz	16QAM	26047	3RB#0	21.13	PASS
Band25	1.4MHz	QPSK	26047	3RB#1	22.27	PASS
Band25	1.4MHz	16QAM	26047	3RB#1	21.15	PASS
Band25	1.4MHz	QPSK	26047	3RB#3	22.23	PASS

Band25	1.4MHz	16QAM	26047	3RB#3	21.10	PASS
Band25	1.4MHz	QPSK	26047	6RB#0	21.33	PASS
Band25	1.4MHz	16QAM	26047	6RB#0	20.31	PASS
Band25	1.4MHz	QPSK	26365	1RB#0	22.38	PASS
Band25	1.4MHz	16QAM	26365	1RB#0	21.22	PASS
Band25	1.4MHz	QPSK	26365	1RB#2	22.38	PASS
Band25	1.4MHz	16QAM	26365	1RB#2	21.14	PASS
Band25	1.4MHz	QPSK	26365	1RB#5	22.42	PASS
Band25	1.4MHz	16QAM	26365	1RB#5	21.17	PASS
Band25	1.4MHz	QPSK	26365	3RB#0	22.42	PASS
Band25	1.4MHz	16QAM	26365	3RB#0	21.21	PASS
Band25	1.4MHz	QPSK	26365	3RB#1	22.37	PASS
Band25	1.4MHz	16QAM	26365	3RB#1	21.23	PASS
Band25	1.4MHz	QPSK	26365	3RB#3	22.41	PASS
Band25	1.4MHz	16QAM	26365	3RB#3	21.15	PASS
Band25	1.4MHz	QPSK	26365	6RB#0	21.43	PASS
Band25	1.4MHz	16QAM	26365	6RB#0	20.42	PASS
Band25	1.4MHz	QPSK	26683	1RB#0	22.59	PASS
Band25	1.4MHz	16QAM	26683	1RB#0	21.43	PASS
Band25	1.4MHz	QPSK	26683	1RB#2	22.55	PASS
Band25	1.4MHz	16QAM	26683	1RB#2	21.54	PASS
Band25	1.4MHz	QPSK	26683	1RB#5	22.66	PASS
Band25	1.4MHz	16QAM	26683	1RB#5	21.53	PASS
Band25	1.4MHz	QPSK	26683	3RB#0	22.68	PASS
Band25	1.4MHz	16QAM	26683	3RB#0	21.53	PASS
Band25	1.4MHz	QPSK	26683	3RB#1	22.73	PASS
Band25	1.4MHz	16QAM	26683	3RB#1	21.56	PASS
Band25	1.4MHz	QPSK	26683	3RB#3	22.73	PASS
Band25	1.4MHz	16QAM	26683	3RB#3	21.54	PASS
Band25	1.4MHz	QPSK	26683	6RB#0	21.65	PASS
Band25	1.4MHz	16QAM	26683	6RB#0	20.52	PASS
Band25	3MHz	QPSK	26055	1RB#0	22.33	PASS
Band25	3MHz	16QAM	26055	1RB#0	21.33	PASS
Band25	3MHz	QPSK	26055	1RB#8	22.28	PASS
Band25	3MHz	16QAM	26055	1RB#8	21.30	PASS
Band25	3MHz	QPSK	26055	1RB#14	22.30	PASS
Band25	3MHz	16QAM	26055	1RB#14	21.28	PASS
Band25	3MHz	QPSK	26055	8RB#0	21.33	PASS
Band25	3MHz	16QAM	26055	8RB#0	20.32	PASS
Band25	3MHz	QPSK	26055	8RB#4	21.33	PASS
Band25	3MHz	16QAM	26055	8RB#4	20.34	PASS
Band25	3MHz	QPSK	26055	8RB#7	21.30	PASS

Band25	3MHz	16QAM	26055	8RB#7	20.28	PASS
Band25	3MHz	QPSK	26055	15RB#0	21.29	PASS
Band25	3MHz	16QAM	26055	15RB#0	20.29	PASS
Band25	3MHz	QPSK	26365	1RB#0	22.40	PASS
Band25	3MHz	16QAM	26365	1RB#0	21.30	PASS
Band25	3MHz	QPSK	26365	1RB#8	22.42	PASS
Band25	3MHz	16QAM	26365	1RB#8	21.26	PASS
Band25	3MHz	QPSK	26365	1RB#14	22.42	PASS
Band25	3MHz	16QAM	26365	1RB#14	21.29	PASS
Band25	3MHz	QPSK	26365	8RB#0	21.40	PASS
Band25	3MHz	16QAM	26365	8RB#0	20.35	PASS
Band25	3MHz	QPSK	26365	8RB#4	21.40	PASS
Band25	3MHz	16QAM	26365	8RB#4	20.36	PASS
Band25	3MHz	QPSK	26365	8RB#7	21.42	PASS
Band25	3MHz	16QAM	26365	8RB#7	20.38	PASS
Band25	3MHz	QPSK	26365	15RB#0	21.41	PASS
Band25	3MHz	16QAM	26365	15RB#0	20.32	PASS
Band25	3MHz	QPSK	26675	1RB#0	22.49	PASS
Band25	3MHz	16QAM	26675	1RB#0	21.37	PASS
Band25	3MHz	QPSK	26675	1RB#8	22.51	PASS
Band25	3MHz	16QAM	26675	1RB#8	21.33	PASS
Band25	3MHz	QPSK	26675	1RB#14	22.56	PASS
Band25	3MHz	16QAM	26675	1RB#14	21.39	PASS
Band25	3MHz	QPSK	26675	8RB#0	21.69	PASS
Band25	3MHz	16QAM	26675	8RB#0	20.66	PASS
Band25	3MHz	QPSK	26675	8RB#4	21.70	PASS
Band25	3MHz	16QAM	26675	8RB#4	20.67	PASS
Band25	3MHz	QPSK	26675	8RB#7	21.67	PASS
Band25	3MHz	16QAM	26675	8RB#7	20.66	PASS
Band25	3MHz	QPSK	26675	15RB#0	21.64	PASS
Band25	3MHz	16QAM	26675	15RB#0	20.54	PASS
Band25	5MHz	QPSK	26065	1RB#0	22.55	PASS
Band25	5MHz	16QAM	26065	1RB#0	21.39	PASS
Band25	5MHz	QPSK	26065	1RB#12	22.49	PASS
Band25	5MHz	16QAM	26065	1RB#12	21.32	PASS
Band25	5MHz	QPSK	26065	1RB#24	22.54	PASS
Band25	5MHz	16QAM	26065	1RB#24	21.31	PASS
Band25	5MHz	QPSK	26065	12RB#0	21.37	PASS
Band25	5MHz	16QAM	26065	12RB#0	20.36	PASS
Band25	5MHz	QPSK	26065	12RB#6	21.37	PASS
Band25	5MHz	16QAM	26065	12RB#6	20.36	PASS
Band25	5MHz	QPSK	26065	12RB#13	21.29	PASS

Band25	5MHz	16QAM	26065	12RB#13	20.28	PASS
Band25	5MHz	QPSK	26065	25RB#0	21.39	PASS
Band25	5MHz	16QAM	26065	25RB#0	20.34	PASS
Band25	5MHz	QPSK	26365	1RB#0	22.47	PASS
Band25	5MHz	16QAM	26365	1RB#0	21.51	PASS
Band25	5MHz	QPSK	26365	1RB#12	22.54	PASS
Band25	5MHz	16QAM	26365	1RB#12	21.54	PASS
Band25	5MHz	QPSK	26365	1RB#24	22.55	PASS
Band25	5MHz	16QAM	26365	1RB#24	21.60	PASS
Band25	5MHz	QPSK	26365	12RB#0	21.44	PASS
Band25	5MHz	16QAM	26365	12RB#0	20.52	PASS
Band25	5MHz	QPSK	26365	12RB#6	21.44	PASS
Band25	5MHz	16QAM	26365	12RB#6	20.54	PASS
Band25	5MHz	QPSK	26365	12RB#13	21.46	PASS
Band25	5MHz	16QAM	26365	12RB#13	20.54	PASS
Band25	5MHz	QPSK	26365	25RB#0	21.51	PASS
Band25	5MHz	16QAM	26365	25RB#0	20.45	PASS
Band25	5MHz	QPSK	26665	1RB#0	22.64	PASS
Band25	5MHz	16QAM	26665	1RB#0	21.54	PASS
Band25	5MHz	QPSK	26665	1RB#12	22.68	PASS
Band25	5MHz	16QAM	26665	1RB#12	21.52	PASS
Band25	5MHz	QPSK	26665	1RB#24	22.77	PASS
Band25	5MHz	16QAM	26665	1RB#24	21.65	PASS
Band25	5MHz	QPSK	26665	12RB#0	21.70	PASS
Band25	5MHz	16QAM	26665	12RB#0	20.68	PASS
Band25	5MHz	QPSK	26665	12RB#6	21.68	PASS
Band25	5MHz	16QAM	26665	12RB#6	20.69	PASS
Band25	5MHz	QPSK	26665	12RB#13	21.69	PASS
Band25	5MHz	16QAM	26665	12RB#13	20.67	PASS
Band25	5MHz	QPSK	26665	25RB#0	21.72	PASS
Band25	5MHz	16QAM	26665	25RB#0	20.73	PASS
Band25	10MHz	QPSK	26090	1RB#0	22.44	PASS
Band25	10MHz	16QAM	26090	1RB#0	21.45	PASS
Band25	10MHz	QPSK	26090	1RB#24	22.39	PASS
Band25	10MHz	16QAM	26090	1RB#24	21.37	PASS
Band25	10MHz	QPSK	26090	1RB#49	22.42	PASS
Band25	10MHz	16QAM	26090	1RB#49	21.42	PASS
Band25	10MHz	QPSK	26090	25RB#0	21.47	PASS
Band25	10MHz	16QAM	26090	25RB#0	20.39	PASS
Band25	10MHz	QPSK	26090	25RB#12	21.47	PASS
Band25	10MHz	16QAM	26090	25RB#12	20.42	PASS
Band25	10MHz	QPSK	26090	25RB#25	21.40	PASS

Band25	10MHz	16QAM	26090	25RB#25	20.33	PASS
Band25	10MHz	QPSK	26090	50RB#0	21.46	PASS
Band25	10MHz	16QAM	26090	50RB#0	20.42	PASS
Band25	10MHz	QPSK	26365	1RB#0	22.51	PASS
Band25	10MHz	16QAM	26365	1RB#0	21.37	PASS
Band25	10MHz	QPSK	26365	1RB#24	22.56	PASS
Band25	10MHz	16QAM	26365	1RB#24	21.42	PASS
Band25	10MHz	QPSK	26365	1RB#49	22.53	PASS
Band25	10MHz	16QAM	26365	1RB#49	21.45	PASS
Band25	10MHz	QPSK	26365	25RB#0	21.54	PASS
Band25	10MHz	16QAM	26365	25RB#0	20.55	PASS
Band25	10MHz	QPSK	26365	25RB#12	21.56	PASS
Band25	10MHz	16QAM	26365	25RB#12	20.54	PASS
Band25	10MHz	QPSK	26365	25RB#25	21.54	PASS
Band25	10MHz	16QAM	26365	25RB#25	20.58	PASS
Band25	10MHz	QPSK	26365	50RB#0	21.52	PASS
Band25	10MHz	16QAM	26365	50RB#0	20.50	PASS
Band25	10MHz	QPSK	26640	1RB#0	22.51	PASS
Band25	10MHz	16QAM	26640	1RB#0	21.36	PASS
Band25	10MHz	QPSK	26640	1RB#24	22.51	PASS
Band25	10MHz	16QAM	26640	1RB#24	21.28	PASS
Band25	10MHz	QPSK	26640	1RB#49	22.60	PASS
Band25	10MHz	16QAM	26640	1RB#49	21.43	PASS
Band25	10MHz	QPSK	26640	25RB#0	21.64	PASS
Band25	10MHz	16QAM	26640	25RB#0	20.65	PASS
Band25	10MHz	QPSK	26640	25RB#12	21.63	PASS
Band25	10MHz	16QAM	26640	25RB#12	20.65	PASS
Band25	10MHz	QPSK	26640	25RB#25	21.66	PASS
Band25	10MHz	16QAM	26640	25RB#25	20.64	PASS
Band25	10MHz	QPSK	26640	50RB#0	21.64	PASS
Band25	10MHz	16QAM	26640	50RB#0	20.65	PASS
Band25	15MHz	QPSK	26115	1RB#0	22.55	PASS
Band25	15MHz	16QAM	26115	1RB#0	21.44	PASS
Band25	15MHz	QPSK	26115	1RB#38	22.40	PASS
Band25	15MHz	16QAM	26115	1RB#38	21.40	PASS
Band25	15MHz	QPSK	26115	1RB#74	22.41	PASS
Band25	15MHz	16QAM	26115	1RB#74	21.41	PASS
Band25	15MHz	QPSK	26115	38RB#0	21.42	PASS
Band25	15MHz	16QAM	26115	38RB#0	21.43	PASS
Band25	15MHz	QPSK	26115	38RB#18	21.42	PASS
Band25	15MHz	16QAM	26115	38RB#18	21.43	PASS
Band25	15MHz	QPSK	26115	38RB#37	21.44	PASS

Band25	15MHz	16QAM	26115	38RB#37	21.42	PASS
Band25	15MHz	QPSK	26115	75RB#0	21.44	PASS
Band25	15MHz	16QAM	26115	75RB#0	20.38	PASS
Band25	15MHz	QPSK	26365	1RB#0	22.48	PASS
Band25	15MHz	16QAM	26365	1RB#0	21.60	PASS
Band25	15MHz	QPSK	26365	1RB#38	22.54	PASS
Band25	15MHz	16QAM	26365	1RB#38	21.65	PASS
Band25	15MHz	QPSK	26365	1RB#74	22.47	PASS
Band25	15MHz	16QAM	26365	1RB#74	21.61	PASS
Band25	15MHz	QPSK	26365	38RB#0	21.52	PASS
Band25	15MHz	16QAM	26365	38RB#0	21.51	PASS
Band25	15MHz	QPSK	26365	38RB#18	21.50	PASS
Band25	15MHz	16QAM	26365	38RB#18	21.51	PASS
Band25	15MHz	QPSK	26365	38RB#37	21.54	PASS
Band25	15MHz	16QAM	26365	38RB#37	21.51	PASS
Band25	15MHz	QPSK	26365	75RB#0	21.52	PASS
Band25	15MHz	16QAM	26365	75RB#0	20.54	PASS
Band25	15MHz	QPSK	26615	1RB#0	22.68	PASS
Band25	15MHz	16QAM	26615	1RB#0	21.42	PASS
Band25	15MHz	QPSK	26615	1RB#38	22.58	PASS
Band25	15MHz	16QAM	26615	1RB#38	21.43	PASS
Band25	15MHz	QPSK	26615	1RB#74	22.68	PASS
Band25	15MHz	16QAM	26615	1RB#74	21.51	PASS
Band25	15MHz	QPSK	26615	38RB#0	21.68	PASS
Band25	15MHz	16QAM	26615	38RB#0	21.68	PASS
Band25	15MHz	QPSK	26615	38RB#18	21.67	PASS
Band25	15MHz	16QAM	26615	38RB#18	21.68	PASS
Band25	15MHz	QPSK	26615	38RB#37	21.67	PASS
Band25	15MHz	16QAM	26615	38RB#37	21.68	PASS
Band25	15MHz	QPSK	26615	75RB#0	21.66	PASS
Band25	15MHz	16QAM	26615	75RB#0	20.69	PASS
Band25	20MHz	QPSK	26140	1RB#0	22.62	PASS
Band25	20MHz	16QAM	26140	1RB#0	21.42	PASS
Band25	20MHz	QPSK	26140	1RB#49	22.48	PASS
Band25	20MHz	16QAM	26140	1RB#49	21.38	PASS
Band25	20MHz	QPSK	26140	1RB#99	22.56	PASS
Band25	20MHz	16QAM	26140	1RB#99	21.37	PASS
Band25	20MHz	QPSK	26140	50RB#0	21.54	PASS
Band25	20MHz	16QAM	26140	50RB#0	20.53	PASS
Band25	20MHz	QPSK	26140	50RB#25	21.50	PASS
Band25	20MHz	16QAM	26140	50RB#25	20.51	PASS
Band25	20MHz	QPSK	26140	50RB#50	21.47	PASS

Band25	20MHz	16QAM	26140	50RB#50	20.46	PASS
Band25	20MHz	QPSK	26140	100RB#0	21.52	PASS
Band25	20MHz	16QAM	26140	100RB#0	20.47	PASS
Band25	20MHz	QPSK	26365	1RB#0	22.54	PASS
Band25	20MHz	16QAM	26365	1RB#0	21.73	PASS
Band25	20MHz	QPSK	26365	1RB#49	22.60	PASS
Band25	20MHz	16QAM	26365	1RB#49	21.79	PASS
Band25	20MHz	QPSK	26365	1RB#99	22.55	PASS
Band25	20MHz	16QAM	26365	1RB#99	21.75	PASS
Band25	20MHz	QPSK	26365	50RB#0	21.56	PASS
Band25	20MHz	16QAM	26365	50RB#0	20.56	PASS
Band25	20MHz	QPSK	26365	50RB#25	21.57	PASS
Band25	20MHz	16QAM	26365	50RB#25	20.53	PASS
Band25	20MHz	QPSK	26365	50RB#50	21.54	PASS
Band25	20MHz	16QAM	26365	50RB#50	20.51	PASS
Band25	20MHz	QPSK	26365	100RB#0	21.53	PASS
Band25	20MHz	16QAM	26365	100RB#0	20.49	PASS
Band25	20MHz	QPSK	26590	1RB#0	22.70	PASS
Band25	20MHz	16QAM	26590	1RB#0	21.58	PASS
Band25	20MHz	QPSK	26590	1RB#49	22.81	PASS
Band25	20MHz	16QAM	26590	1RB#49	21.59	PASS
Band25	20MHz	QPSK	26590	1RB#99	22.84	PASS
Band25	20MHz	16QAM	26590	1RB#99	21.66	PASS
Band25	20MHz	QPSK	26590	50RB#0	21.67	PASS
Band25	20MHz	16QAM	26590	50RB#0	20.61	PASS
Band25	20MHz	QPSK	26590	50RB#25	21.64	PASS
Band25	20MHz	16QAM	26590	50RB#25	20.63	PASS
Band25	20MHz	QPSK	26590	50RB#50	21.65	PASS
Band25	20MHz	16QAM	26590	50RB#50	20.67	PASS
Band25	20MHz	QPSK	26590	100RB#0	21.67	PASS
Band25	20MHz	16QAM	26590	100RB#0	20.62	PASS

LTE(P4): Sensor ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band25	1.4MHz	QPSK	26047	1RB#0	20.05	PASS
Band25	1.4MHz	16QAM	26047	1RB#0	20.12	PASS
Band25	1.4MHz	QPSK	26047	1RB#2	20.15	PASS
Band25	1.4MHz	16QAM	26047	1RB#2	20.09	PASS
Band25	1.4MHz	QPSK	26047	1RB#5	20.18	PASS
Band25	1.4MHz	16QAM	26047	1RB#5	20.19	PASS
Band25	1.4MHz	QPSK	26047	3RB#0	20.28	PASS

Band25	1.4MHz	16QAM	26047	3RB#0	20.12	PASS
Band25	1.4MHz	QPSK	26047	3RB#1	20.23	PASS
Band25	1.4MHz	16QAM	26047	3RB#1	20.15	PASS
Band25	1.4MHz	QPSK	26047	3RB#3	20.24	PASS
Band25	1.4MHz	16QAM	26047	3RB#3	20.15	PASS
Band25	1.4MHz	QPSK	26047	6RB#0	20.35	PASS
Band25	1.4MHz	16QAM	26047	6RB#0	20.36	PASS
Band25	1.4MHz	QPSK	26365	1RB#0	20.35	PASS
Band25	1.4MHz	16QAM	26365	1RB#0	20.24	PASS
Band25	1.4MHz	QPSK	26365	1RB#2	20.37	PASS
Band25	1.4MHz	16QAM	26365	1RB#2	20.11	PASS
Band25	1.4MHz	QPSK	26365	1RB#5	20.41	PASS
Band25	1.4MHz	16QAM	26365	1RB#5	20.12	PASS
Band25	1.4MHz	QPSK	26365	3RB#0	20.43	PASS
Band25	1.4MHz	16QAM	26365	3RB#0	20.22	PASS
Band25	1.4MHz	QPSK	26365	3RB#1	20.31	PASS
Band25	1.4MHz	16QAM	26365	3RB#1	20.25	PASS
Band25	1.4MHz	QPSK	26365	3RB#3	20.44	PASS
Band25	1.4MHz	16QAM	26365	3RB#3	20.15	PASS
Band25	1.4MHz	QPSK	26365	6RB#0	20.46	PASS
Band25	1.4MHz	16QAM	26365	6RB#0	20.41	PASS
Band25	1.4MHz	QPSK	26683	1RB#0	20.52	PASS
Band25	1.4MHz	16QAM	26683	1RB#0	20.46	PASS
Band25	1.4MHz	QPSK	26683	1RB#2	20.55	PASS
Band25	1.4MHz	16QAM	26683	1RB#2	20.54	PASS
Band25	1.4MHz	QPSK	26683	1RB#5	20.64	PASS
Band25	1.4MHz	16QAM	26683	1RB#5	20.52	PASS
Band25	1.4MHz	QPSK	26683	3RB#0	20.62	PASS
Band25	1.4MHz	16QAM	26683	3RB#0	20.53	PASS
Band25	1.4MHz	QPSK	26683	3RB#1	20.76	PASS
Band25	1.4MHz	16QAM	26683	3RB#1	20.54	PASS
Band25	1.4MHz	QPSK	26683	3RB#3	20.72	PASS
Band25	1.4MHz	16QAM	26683	3RB#3	20.54	PASS
Band25	1.4MHz	QPSK	26683	6RB#0	20.62	PASS
Band25	1.4MHz	16QAM	26683	6RB#0	20.51	PASS
Band25	3MHz	QPSK	26055	1RB#0	20.32	PASS
Band25	3MHz	16QAM	26055	1RB#0	20.33	PASS
Band25	3MHz	QPSK	26055	1RB#8	20.21	PASS
Band25	3MHz	16QAM	26055	1RB#8	20.32	PASS
Band25	3MHz	QPSK	26055	1RB#14	20.32	PASS
Band25	3MHz	16QAM	26055	1RB#14	20.21	PASS
Band25	3MHz	QPSK	26055	8RB#0	20.35	PASS

Band25	3MHz	16QAM	26055	8RB#0	20.36	PASS
Band25	3MHz	QPSK	26055	8RB#4	20.34	PASS
Band25	3MHz	16QAM	26055	8RB#4	20.32	PASS
Band25	3MHz	QPSK	26055	8RB#7	20.33	PASS
Band25	3MHz	16QAM	26055	8RB#7	20.21	PASS
Band25	3MHz	QPSK	26055	15RB#0	20.22	PASS
Band25	3MHz	16QAM	26055	15RB#0	20.22	PASS
Band25	3MHz	QPSK	26365	1RB#0	20.43	PASS
Band25	3MHz	16QAM	26365	1RB#0	20.35	PASS
Band25	3MHz	QPSK	26365	1RB#8	20.45	PASS
Band25	3MHz	16QAM	26365	1RB#8	20.21	PASS
Band25	3MHz	QPSK	26365	1RB#14	20.42	PASS
Band25	3MHz	16QAM	26365	1RB#14	20.22	PASS
Band25	3MHz	QPSK	26365	8RB#0	20.28	PASS
Band25	3MHz	16QAM	26365	8RB#0	20.31	PASS
Band25	3MHz	QPSK	26365	8RB#4	20.29	PASS
Band25	3MHz	16QAM	26365	8RB#4	20.25	PASS
Band25	3MHz	QPSK	26365	8RB#7	20.36	PASS
Band25	3MHz	16QAM	26365	8RB#7	20.25	PASS
Band25	3MHz	QPSK	26365	15RB#0	20.21	PASS
Band25	3MHz	16QAM	26365	15RB#0	20.28	PASS
Band25	3MHz	QPSK	26675	1RB#0	20.36	PASS
Band25	3MHz	16QAM	26675	1RB#0	20.24	PASS
Band25	3MHz	QPSK	26675	1RB#8	20.25	PASS
Band25	3MHz	16QAM	26675	1RB#8	20.31	PASS
Band25	3MHz	QPSK	26675	1RB#14	20.32	PASS
Band25	3MHz	16QAM	26675	1RB#14	20.21	PASS
Band25	3MHz	QPSK	26675	8RB#0	20.24	PASS
Band25	3MHz	16QAM	26675	8RB#0	20.64	PASS
Band25	3MHz	QPSK	26675	8RB#4	20.45	PASS
Band25	3MHz	16QAM	26675	8RB#4	20.23	PASS
Band25	3MHz	QPSK	26675	8RB#7	20.35	PASS
Band25	3MHz	16QAM	26675	8RB#7	20.56	PASS
Band25	3MHz	QPSK	26675	15RB#0	20.56	PASS
Band25	3MHz	16QAM	26675	15RB#0	20.42	PASS
Band25	5MHz	QPSK	26065	1RB#0	20.25	PASS
Band25	5MHz	16QAM	26065	1RB#0	20.35	PASS
Band25	5MHz	QPSK	26065	1RB#12	20.54	PASS
Band25	5MHz	16QAM	26065	1RB#12	20.21	PASS
Band25	5MHz	QPSK	26065	1RB#24	20.28	PASS
Band25	5MHz	16QAM	26065	1RB#24	20.25	PASS
Band25	5MHz	QPSK	26065	12RB#0	20.36	PASS

Band25	5MHz	16QAM	26065	12RB#0	20.54	PASS
Band25	5MHz	QPSK	26065	12RB#6	20.25	PASS
Band25	5MHz	16QAM	26065	12RB#6	20.15	PASS
Band25	5MHz	QPSK	26065	12RB#13	20.25	PASS
Band25	5MHz	16QAM	26065	12RB#13	20.26	PASS
Band25	5MHz	QPSK	26065	25RB#0	20.24	PASS
Band25	5MHz	16QAM	26065	25RB#0	20.21	PASS
Band25	5MHz	QPSK	26365	1RB#0	20.25	PASS
Band25	5MHz	16QAM	26365	1RB#0	20.38	PASS
Band25	5MHz	QPSK	26365	1RB#12	20.31	PASS
Band25	5MHz	16QAM	26365	1RB#12	20.35	PASS
Band25	5MHz	QPSK	26365	1RB#24	20.51	PASS
Band25	5MHz	16QAM	26365	1RB#24	20.25	PASS
Band25	5MHz	QPSK	26365	12RB#0	20.36	PASS
Band25	5MHz	16QAM	26365	12RB#0	20.54	PASS
Band25	5MHz	QPSK	26365	12RB#6	20.25	PASS
Band25	5MHz	16QAM	26365	12RB#6	20.35	PASS
Band25	5MHz	QPSK	26365	12RB#13	20.24	PASS
Band25	5MHz	16QAM	26365	12RB#13	20.54	PASS
Band25	5MHz	QPSK	26365	25RB#0	20.36	PASS
Band25	5MHz	16QAM	26365	25RB#0	20.54	PASS
Band25	5MHz	QPSK	26665	1RB#0	20.25	PASS
Band25	5MHz	16QAM	26665	1RB#0	20.36	PASS
Band25	5MHz	QPSK	26665	1RB#12	20.54	PASS
Band25	5MHz	16QAM	26665	1RB#12	20.41	PASS
Band25	5MHz	QPSK	26665	1RB#24	20.71	PASS
Band25	5MHz	16QAM	26665	1RB#24	20.62	PASS
Band25	5MHz	QPSK	26665	12RB#0	20.73	PASS
Band25	5MHz	16QAM	26665	12RB#0	20.65	PASS
Band25	5MHz	QPSK	26665	12RB#6	20.61	PASS
Band25	5MHz	16QAM	26665	12RB#6	20.62	PASS
Band25	5MHz	QPSK	26665	12RB#13	20.62	PASS
Band25	5MHz	16QAM	26665	12RB#13	20.63	PASS
Band25	5MHz	QPSK	26665	25RB#0	20.74	PASS
Band25	5MHz	16QAM	26665	25RB#0	20.75	PASS
Band25	10MHz	QPSK	26090	1RB#0	20.41	PASS
Band25	10MHz	16QAM	26090	1RB#0	20.42	PASS
Band25	10MHz	QPSK	26090	1RB#24	20.33	PASS
Band25	10MHz	16QAM	26090	1RB#24	20.31	PASS
Band25	10MHz	QPSK	26090	1RB#49	20.28	PASS
Band25	10MHz	16QAM	26090	1RB#49	20.36	PASS
Band25	10MHz	QPSK	26090	25RB#0	20.54	PASS

Band25	10MHz	16QAM	26090	25RB#0	20.36	PASS
Band25	10MHz	QPSK	26090	25RB#12	20.26	PASS
Band25	10MHz	16QAM	26090	25RB#12	20.24	PASS
Band25	10MHz	QPSK	26090	25RB#25	20.26	PASS
Band25	10MHz	16QAM	26090	25RB#25	20.32	PASS
Band25	10MHz	QPSK	26090	50RB#0	20.12	PASS
Band25	10MHz	16QAM	26090	50RB#0	20.23	PASS
Band25	10MHz	QPSK	26365	1RB#0	20.42	PASS
Band25	10MHz	16QAM	26365	1RB#0	20.25	PASS
Band25	10MHz	QPSK	26365	1RB#24	20.35	PASS
Band25	10MHz	16QAM	26365	1RB#24	20.27	PASS
Band25	10MHz	QPSK	26365	1RB#49	20.34	PASS
Band25	10MHz	16QAM	26365	1RB#49	20.26	PASS
Band25	10MHz	QPSK	26365	25RB#0	20.35	PASS
Band25	10MHz	16QAM	26365	25RB#0	20.14	PASS
Band25	10MHz	QPSK	26365	25RB#12	20.23	PASS
Band25	10MHz	16QAM	26365	25RB#12	20.32	PASS
Band25	10MHz	QPSK	26365	25RB#25	20.34	PASS
Band25	10MHz	16QAM	26365	25RB#25	20.38	PASS
Band25	10MHz	QPSK	26365	50RB#0	20.42	PASS
Band25	10MHz	16QAM	26365	50RB#0	20.42	PASS
Band25	10MHz	QPSK	26640	1RB#0	20.36	PASS
Band25	10MHz	16QAM	26640	1RB#0	20.25	PASS
Band25	10MHz	QPSK	26640	1RB#24	20.48	PASS
Band25	10MHz	16QAM	26640	1RB#24	20.31	PASS
Band25	10MHz	QPSK	26640	1RB#49	20.12	PASS
Band25	10MHz	16QAM	26640	1RB#49	20.25	PASS
Band25	10MHz	QPSK	26640	25RB#0	20.42	PASS
Band25	10MHz	16QAM	26640	25RB#0	20.23	PASS
Band25	10MHz	QPSK	26640	25RB#12	20.25	PASS
Band25	10MHz	16QAM	26640	25RB#12	20.12	PASS
Band25	10MHz	QPSK	26640	25RB#25	20.25	PASS
Band25	10MHz	16QAM	26640	25RB#25	20.35	PASS
Band25	10MHz	QPSK	26640	50RB#0	20.25	PASS
Band25	10MHz	16QAM	26640	50RB#0	20.12	PASS
Band25	15MHz	QPSK	26115	1RB#0	20.25	PASS
Band25	15MHz	16QAM	26115	1RB#0	20.36	PASS
Band25	15MHz	QPSK	26115	1RB#38	20.54	PASS
Band25	15MHz	16QAM	26115	1RB#38	20.25	PASS
Band25	15MHz	QPSK	26115	1RB#74	20.21	PASS
Band25	15MHz	16QAM	26115	1RB#74	20.24	PASS
Band25	15MHz	QPSK	26115	38RB#0	20.26	PASS

Band25	15MHz	16QAM	26115	38RB#0	20.36	PASS
Band25	15MHz	QPSK	26115	38RB#18	20.54	PASS
Band25	15MHz	16QAM	26115	38RB#18	20.12	PASS
Band25	15MHz	QPSK	26115	38RB#37	20.15	PASS
Band25	15MHz	16QAM	26115	38RB#37	20.25	PASS
Band25	15MHz	QPSK	26115	75RB#0	20.36	PASS
Band25	15MHz	16QAM	26115	75RB#0	20.25	PASS
Band25	15MHz	QPSK	26365	1RB#0	20.45	PASS
Band25	15MHz	16QAM	26365	1RB#0	20.41	PASS
Band25	15MHz	QPSK	26365	1RB#38	20.32	PASS
Band25	15MHz	16QAM	26365	1RB#38	20.15	PASS
Band25	15MHz	QPSK	26365	1RB#74	20.25	PASS
Band25	15MHz	16QAM	26365	1RB#74	20.36	PASS
Band25	15MHz	QPSK	26365	38RB#0	20.54	PASS
Band25	15MHz	16QAM	26365	38RB#0	20.41	PASS
Band25	15MHz	QPSK	26365	38RB#18	20.25	PASS
Band25	15MHz	16QAM	26365	38RB#18	20.36	PASS
Band25	15MHz	QPSK	26365	38RB#37	20.28	PASS
Band25	15MHz	16QAM	26365	38RB#37	20.25	PASS
Band25	15MHz	QPSK	26365	75RB#0	20.24	PASS
Band25	15MHz	16QAM	26365	75RB#0	20.15	PASS
Band25	15MHz	QPSK	26615	1RB#0	20.26	PASS
Band25	15MHz	16QAM	26615	1RB#0	20.25	PASS
Band25	15MHz	QPSK	26615	1RB#38	20.14	PASS
Band25	15MHz	16QAM	26615	1RB#38	20.36	PASS
Band25	15MHz	QPSK	26615	1RB#74	20.54	PASS
Band25	15MHz	16QAM	26615	1RB#74	20.23	PASS
Band25	15MHz	QPSK	26615	38RB#0	20.21	PASS
Band25	15MHz	16QAM	26615	38RB#0	20.24	PASS
Band25	15MHz	QPSK	26615	38RB#18	20.25	PASS
Band25	15MHz	16QAM	26615	38RB#18	20.36	PASS
Band25	15MHz	QPSK	26615	38RB#37	20.25	PASS
Band25	15MHz	16QAM	26615	38RB#37	20.45	PASS
Band25	15MHz	QPSK	26615	75RB#0	20.25	PASS
Band25	15MHz	16QAM	26615	75RB#0	20.35	PASS
Band25	20MHz	QPSK	26140	1RB#0	20.41	PASS
Band25	20MHz	16QAM	26140	1RB#0	20.25	PASS
Band25	20MHz	QPSK	26140	1RB#49	20.36	PASS
Band25	20MHz	16QAM	26140	1RB#49	20.25	PASS
Band25	20MHz	QPSK	26140	1RB#99	20.12	PASS
Band25	20MHz	16QAM	26140	1RB#99	20.25	PASS
Band25	20MHz	QPSK	26140	50RB#0	20.36	PASS

Band25	20MHz	16QAM	26140	50RB#0	20.24	PASS
Band25	20MHz	QPSK	26140	50RB#25	20.24	PASS
Band25	20MHz	16QAM	26140	50RB#25	20.42	PASS
Band25	20MHz	QPSK	26140	50RB#50	20.23	PASS
Band25	20MHz	16QAM	26140	50RB#50	20.25	PASS
Band25	20MHz	QPSK	26140	100RB#0	20.38	PASS
Band25	20MHz	16QAM	26140	100RB#0	20.25	PASS
Band25	20MHz	QPSK	26365	1RB#0	20.31	PASS
Band25	20MHz	16QAM	26365	1RB#0	20.25	PASS
Band25	20MHz	QPSK	26365	1RB#49	20.32	PASS
Band25	20MHz	16QAM	26365	1RB#49	20.41	PASS
Band25	20MHz	QPSK	26365	1RB#99	20.25	PASS
Band25	20MHz	16QAM	26365	1RB#99	20.36	PASS
Band25	20MHz	QPSK	26365	50RB#0	20.54	PASS
Band25	20MHz	16QAM	26365	50RB#0	20.41	PASS
Band25	20MHz	QPSK	26365	50RB#25	20.25	PASS
Band25	20MHz	16QAM	26365	50RB#25	20.36	PASS
Band25	20MHz	QPSK	26365	50RB#50	20.54	PASS
Band25	20MHz	16QAM	26365	50RB#50	20.25	PASS
Band25	20MHz	QPSK	26365	100RB#0	20.54	PASS
Band25	20MHz	16QAM	26365	100RB#0	20.46	PASS
Band25	20MHz	QPSK	26590	1RB#0	20.61	PASS
Band25	20MHz	16QAM	26590	1RB#0	20.54	PASS
Band25	20MHz	QPSK	26590	1RB#49	20.25	PASS
Band25	20MHz	16QAM	26590	1RB#49	20.36	PASS
Band25	20MHz	QPSK	26590	1RB#99	20.54	PASS
Band25	20MHz	16QAM	26590	1RB#99	20.45	PASS
Band25	20MHz	QPSK	26590	50RB#0	20.25	PASS
Band25	20MHz	16QAM	26590	50RB#0	20.36	PASS
Band25	20MHz	QPSK	26590	50RB#25	20.54	PASS
Band25	20MHz	16QAM	26590	50RB#25	20.42	PASS
Band25	20MHz	QPSK	26590	50RB#50	20.63	PASS
Band25	20MHz	16QAM	26590	50RB#50	20.45	PASS
Band25	20MHz	QPSK	26590	100RB#0	20.25	PASS
Band25	20MHz	16QAM	26590	100RB#0	20.36	PASS

LTE(P3): Hotspot ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band25	1.4MHz	QPSK	26047	1RB#0	18.37	PASS
Band25	1.4MHz	16QAM	26047	1RB#0	18.29	PASS
Band25	1.4MHz	QPSK	26047	1RB#2	18.33	PASS

Band25	1.4MHz	16QAM	26047	1RB#2	18.34	PASS
Band25	1.4MHz	QPSK	26047	1RB#5	18.36	PASS
Band25	1.4MHz	16QAM	26047	1RB#5	18.26	PASS
Band25	1.4MHz	QPSK	26047	3RB#0	18.36	PASS
Band25	1.4MHz	16QAM	26047	3RB#0	18.15	PASS
Band25	1.4MHz	QPSK	26047	3RB#1	18.36	PASS
Band25	1.4MHz	16QAM	26047	3RB#1	18.15	PASS
Band25	1.4MHz	QPSK	26047	3RB#3	18.29	PASS
Band25	1.4MHz	16QAM	26047	3RB#3	18.10	PASS
Band25	1.4MHz	QPSK	26047	6RB#0	18.40	PASS
Band25	1.4MHz	16QAM	26047	6RB#0	18.35	PASS
Band25	1.4MHz	QPSK	26365	1RB#0	18.58	PASS
Band25	1.4MHz	16QAM	26365	1RB#0	18.36	PASS
Band25	1.4MHz	QPSK	26365	1RB#2	18.53	PASS
Band25	1.4MHz	16QAM	26365	1RB#2	18.36	PASS
Band25	1.4MHz	QPSK	26365	1RB#5	18.58	PASS
Band25	1.4MHz	16QAM	26365	1RB#5	18.38	PASS
Band25	1.4MHz	QPSK	26365	3RB#0	18.53	PASS
Band25	1.4MHz	16QAM	26365	3RB#0	18.27	PASS
Band25	1.4MHz	QPSK	26365	3RB#1	18.51	PASS
Band25	1.4MHz	16QAM	26365	3RB#1	18.28	PASS
Band25	1.4MHz	QPSK	26365	3RB#3	18.50	PASS
Band25	1.4MHz	16QAM	26365	3RB#3	18.25	PASS
Band25	1.4MHz	QPSK	26365	6RB#0	18.47	PASS
Band25	1.4MHz	16QAM	26365	6RB#0	18.30	PASS
Band25	1.4MHz	QPSK	26683	1RB#0	18.62	PASS
Band25	1.4MHz	16QAM	26683	1RB#0	18.41	PASS
Band25	1.4MHz	QPSK	26683	1RB#2	18.61	PASS
Band25	1.4MHz	16QAM	26683	1RB#2	18.39	PASS
Band25	1.4MHz	QPSK	26683	1RB#5	18.66	PASS
Band25	1.4MHz	16QAM	26683	1RB#5	18.38	PASS
Band25	1.4MHz	QPSK	26683	3RB#0	18.66	PASS
Band25	1.4MHz	16QAM	26683	3RB#0	18.40	PASS
Band25	1.4MHz	QPSK	26683	3RB#1	18.64	PASS
Band25	1.4MHz	16QAM	26683	3RB#1	18.42	PASS
Band25	1.4MHz	QPSK	26683	3RB#3	18.65	PASS
Band25	1.4MHz	16QAM	26683	3RB#3	18.37	PASS
Band25	1.4MHz	QPSK	26683	6RB#0	18.65	PASS
Band25	1.4MHz	16QAM	26683	6RB#0	18.59	PASS
Band25	3MHz	QPSK	26055	1RB#0	18.37	PASS
Band25	3MHz	16QAM	26055	1RB#0	18.34	PASS
Band25	3MHz	QPSK	26055	1RB#8	18.35	PASS

Band25	3MHz	16QAM	26055	1RB#8	18.33	PASS
Band25	3MHz	QPSK	26055	1RB#14	18.31	PASS
Band25	3MHz	16QAM	26055	1RB#14	18.29	PASS
Band25	3MHz	QPSK	26055	8RB#0	18.37	PASS
Band25	3MHz	16QAM	26055	8RB#0	18.39	PASS
Band25	3MHz	QPSK	26055	8RB#4	18.40	PASS
Band25	3MHz	16QAM	26055	8RB#4	18.41	PASS
Band25	3MHz	QPSK	26055	8RB#7	18.36	PASS
Band25	3MHz	16QAM	26055	8RB#7	18.35	PASS
Band25	3MHz	QPSK	26055	15RB#0	18.36	PASS
Band25	3MHz	16QAM	26055	15RB#0	18.34	PASS
Band25	3MHz	QPSK	26365	1RB#0	18.46	PASS
Band25	3MHz	16QAM	26365	1RB#0	18.31	PASS
Band25	3MHz	QPSK	26365	1RB#8	18.54	PASS
Band25	3MHz	16QAM	26365	1RB#8	18.34	PASS
Band25	3MHz	QPSK	26365	1RB#14	18.53	PASS
Band25	3MHz	16QAM	26365	1RB#14	18.32	PASS
Band25	3MHz	QPSK	26365	8RB#0	18.44	PASS
Band25	3MHz	16QAM	26365	8RB#0	18.44	PASS
Band25	3MHz	QPSK	26365	8RB#4	18.41	PASS
Band25	3MHz	16QAM	26365	8RB#4	18.43	PASS
Band25	3MHz	QPSK	26365	8RB#7	18.44	PASS
Band25	3MHz	16QAM	26365	8RB#7	18.45	PASS
Band25	3MHz	QPSK	26365	15RB#0	18.45	PASS
Band25	3MHz	16QAM	26365	15RB#0	18.37	PASS
Band25	3MHz	QPSK	26675	1RB#0	18.63	PASS
Band25	3MHz	16QAM	26675	1RB#0	18.39	PASS
Band25	3MHz	QPSK	26675	1RB#8	18.63	PASS
Band25	3MHz	16QAM	26675	1RB#8	18.41	PASS
Band25	3MHz	QPSK	26675	1RB#14	18.63	PASS
Band25	3MHz	16QAM	26675	1RB#14	18.38	PASS
Band25	3MHz	QPSK	26675	8RB#0	18.69	PASS
Band25	3MHz	16QAM	26675	8RB#0	18.67	PASS
Band25	3MHz	QPSK	26675	8RB#4	18.68	PASS
Band25	3MHz	16QAM	26675	8RB#4	18.69	PASS
Band25	3MHz	QPSK	26675	8RB#7	18.69	PASS
Band25	3MHz	16QAM	26675	8RB#7	18.66	PASS
Band25	3MHz	QPSK	26675	15RB#0	18.63	PASS
Band25	3MHz	16QAM	26675	15RB#0	18.56	PASS
Band25	5MHz	QPSK	26065	1RB#0	18.54	PASS
Band25	5MHz	16QAM	26065	1RB#0	18.41	PASS
Band25	5MHz	QPSK	26065	1RB#12	18.46	PASS

Band25	5MHz	16QAM	26065	1RB#12	18.32	PASS
Band25	5MHz	QPSK	26065	1RB#24	18.45	PASS
Band25	5MHz	16QAM	26065	1RB#24	18.32	PASS
Band25	5MHz	QPSK	26065	12RB#0	18.42	PASS
Band25	5MHz	16QAM	26065	12RB#0	18.39	PASS
Band25	5MHz	QPSK	26065	12RB#6	18.42	PASS
Band25	5MHz	16QAM	26065	12RB#6	18.38	PASS
Band25	5MHz	QPSK	26065	12RB#13	18.34	PASS
Band25	5MHz	16QAM	26065	12RB#13	18.31	PASS
Band25	5MHz	QPSK	26065	25RB#0	18.41	PASS
Band25	5MHz	16QAM	26065	25RB#0	18.37	PASS
Band25	5MHz	QPSK	26365	1RB#0	18.51	PASS
Band25	5MHz	16QAM	26365	1RB#0	18.57	PASS
Band25	5MHz	QPSK	26365	1RB#12	18.56	PASS
Band25	5MHz	16QAM	26365	1RB#12	18.59	PASS
Band25	5MHz	QPSK	26365	1RB#24	18.56	PASS
Band25	5MHz	16QAM	26365	1RB#24	18.61	PASS
Band25	5MHz	QPSK	26365	12RB#0	18.49	PASS
Band25	5MHz	16QAM	26365	12RB#0	18.55	PASS
Band25	5MHz	QPSK	26365	12RB#6	18.50	PASS
Band25	5MHz	16QAM	26365	12RB#6	18.55	PASS
Band25	5MHz	QPSK	26365	12RB#13	18.48	PASS
Band25	5MHz	16QAM	26365	12RB#13	18.53	PASS
Band25	5MHz	QPSK	26365	25RB#0	18.55	PASS
Band25	5MHz	16QAM	26365	25RB#0	18.47	PASS
Band25	5MHz	QPSK	26665	1RB#0	18.74	PASS
Band25	5MHz	16QAM	26665	1RB#0	18.60	PASS
Band25	5MHz	QPSK	26665	1RB#12	18.73	PASS
Band25	5MHz	16QAM	26665	1RB#12	18.59	PASS
Band25	5MHz	QPSK	26665	1RB#24	18.77	PASS
Band25	5MHz	16QAM	26665	1RB#24	18.61	PASS
Band25	5MHz	QPSK	26665	12RB#0	18.72	PASS
Band25	5MHz	16QAM	26665	12RB#0	18.74	PASS
Band25	5MHz	QPSK	26665	12RB#6	18.70	PASS
Band25	5MHz	16QAM	26665	12RB#6	18.75	PASS
Band25	5MHz	QPSK	26665	12RB#13	18.68	PASS
Band25	5MHz	16QAM	26665	12RB#13	18.70	PASS
Band25	5MHz	QPSK	26665	25RB#0	18.74	PASS
Band25	5MHz	16QAM	26665	25RB#0	18.74	PASS
Band25	10MHz	QPSK	26090	1RB#0	18.48	PASS
Band25	10MHz	16QAM	26090	1RB#0	18.46	PASS
Band25	10MHz	QPSK	26090	1RB#24	18.34	PASS

Band25	10MHz	16QAM	26090	1RB#24	18.36	PASS
Band25	10MHz	QPSK	26090	1RB#49	18.32	PASS
Band25	10MHz	16QAM	26090	1RB#49	18.30	PASS
Band25	10MHz	QPSK	26090	25RB#0	18.42	PASS
Band25	10MHz	16QAM	26090	25RB#0	18.39	PASS
Band25	10MHz	QPSK	26090	25RB#12	18.44	PASS
Band25	10MHz	16QAM	26090	25RB#12	18.37	PASS
Band25	10MHz	QPSK	26090	25RB#25	18.29	PASS
Band25	10MHz	16QAM	26090	25RB#25	18.24	PASS
Band25	10MHz	QPSK	26090	50RB#0	18.37	PASS
Band25	10MHz	16QAM	26090	50RB#0	18.32	PASS
Band25	10MHz	QPSK	26365	1RB#0	18.54	PASS
Band25	10MHz	16QAM	26365	1RB#0	18.37	PASS
Band25	10MHz	QPSK	26365	1RB#24	18.57	PASS
Band25	10MHz	16QAM	26365	1RB#24	18.40	PASS
Band25	10MHz	QPSK	26365	1RB#49	18.59	PASS
Band25	10MHz	16QAM	26365	1RB#49	18.40	PASS
Band25	10MHz	QPSK	26365	25RB#0	18.51	PASS
Band25	10MHz	16QAM	26365	25RB#0	18.49	PASS
Band25	10MHz	QPSK	26365	25RB#12	18.51	PASS
Band25	10MHz	16QAM	26365	25RB#12	18.49	PASS
Band25	10MHz	QPSK	26365	25RB#25	18.51	PASS
Band25	10MHz	16QAM	26365	25RB#25	18.50	PASS
Band25	10MHz	QPSK	26365	50RB#0	18.49	PASS
Band25	10MHz	16QAM	26365	50RB#0	18.47	PASS
Band25	10MHz	QPSK	26640	1RB#0	18.62	PASS
Band25	10MHz	16QAM	26640	1RB#0	18.37	PASS
Band25	10MHz	QPSK	26640	1RB#24	18.58	PASS
Band25	10MHz	16QAM	26640	1RB#24	18.34	PASS
Band25	10MHz	QPSK	26640	1RB#49	18.68	PASS
Band25	10MHz	16QAM	26640	1RB#49	18.45	PASS
Band25	10MHz	QPSK	26640	25RB#0	18.66	PASS
Band25	10MHz	16QAM	26640	25RB#0	18.69	PASS
Band25	10MHz	QPSK	26640	25RB#12	18.66	PASS
Band25	10MHz	16QAM	26640	25RB#12	18.65	PASS
Band25	10MHz	QPSK	26640	25RB#25	18.65	PASS
Band25	10MHz	16QAM	26640	25RB#25	18.67	PASS
Band25	10MHz	QPSK	26640	50RB#0	18.64	PASS
Band25	10MHz	16QAM	26640	50RB#0	18.63	PASS
Band25	15MHz	QPSK	26115	1RB#0	18.45	PASS
Band25	15MHz	16QAM	26115	1RB#0	18.43	PASS
Band25	15MHz	QPSK	26115	1RB#38	18.30	PASS

Band25	15MHz	16QAM	26115	1RB#38	18.24	PASS
Band25	15MHz	QPSK	26115	1RB#74	18.19	PASS
Band25	15MHz	16QAM	26115	1RB#74	18.19	PASS
Band25	15MHz	QPSK	26115	38RB#0	18.32	PASS
Band25	15MHz	16QAM	26115	38RB#0	18.31	PASS
Band25	15MHz	QPSK	26115	38RB#18	18.36	PASS
Band25	15MHz	16QAM	26115	38RB#18	18.34	PASS
Band25	15MHz	QPSK	26115	38RB#37	18.33	PASS
Band25	15MHz	16QAM	26115	38RB#37	18.34	PASS
Band25	15MHz	QPSK	26115	75RB#0	18.34	PASS
Band25	15MHz	16QAM	26115	75RB#0	18.27	PASS
Band25	15MHz	QPSK	26365	1RB#0	18.41	PASS
Band25	15MHz	16QAM	26365	1RB#0	18.53	PASS
Band25	15MHz	QPSK	26365	1RB#38	18.48	PASS
Band25	15MHz	16QAM	26365	1RB#38	18.62	PASS
Band25	15MHz	QPSK	26365	1RB#74	18.41	PASS
Band25	15MHz	16QAM	26365	1RB#74	18.57	PASS
Band25	15MHz	QPSK	26365	38RB#0	18.48	PASS
Band25	15MHz	16QAM	26365	38RB#0	18.49	PASS
Band25	15MHz	QPSK	26365	38RB#18	18.48	PASS
Band25	15MHz	16QAM	26365	38RB#18	18.48	PASS
Band25	15MHz	QPSK	26365	38RB#37	18.48	PASS
Band25	15MHz	16QAM	26365	38RB#37	18.48	PASS
Band25	15MHz	QPSK	26365	75RB#0	18.48	PASS
Band25	15MHz	16QAM	26365	75RB#0	18.49	PASS
Band25	15MHz	QPSK	26615	1RB#0	18.61	PASS
Band25	15MHz	16QAM	26615	1RB#0	18.39	PASS
Band25	15MHz	QPSK	26615	1RB#38	18.67	PASS
Band25	15MHz	16QAM	26615	1RB#38	18.42	PASS
Band25	15MHz	QPSK	26615	1RB#74	18.65	PASS
Band25	15MHz	16QAM	26615	1RB#74	18.42	PASS
Band25	15MHz	QPSK	26615	38RB#0	18.63	PASS
Band25	15MHz	16QAM	26615	38RB#0	18.64	PASS
Band25	15MHz	QPSK	26615	38RB#18	18.61	PASS
Band25	15MHz	16QAM	26615	38RB#18	18.62	PASS
Band25	15MHz	QPSK	26615	38RB#37	18.62	PASS
Band25	15MHz	16QAM	26615	38RB#37	18.61	PASS
Band25	15MHz	QPSK	26615	75RB#0	18.62	PASS
Band25	15MHz	16QAM	26615	75RB#0	18.65	PASS
Band25	20MHz	QPSK	26140	1RB#0	18.56	PASS
Band25	20MHz	16QAM	26140	1RB#0	18.41	PASS
Band25	20MHz	QPSK	26140	1RB#49	18.31	PASS

Band25	20MHz	16QAM	26140	1RB#49	18.21	PASS
Band25	20MHz	QPSK	26140	1RB#99	18.40	PASS
Band25	20MHz	16QAM	26140	1RB#99	18.27	PASS
Band25	20MHz	QPSK	26140	50RB#0	18.44	PASS
Band25	20MHz	16QAM	26140	50RB#0	18.41	PASS
Band25	20MHz	QPSK	26140	50RB#25	18.42	PASS
Band25	20MHz	16QAM	26140	50RB#25	18.41	PASS
Band25	20MHz	QPSK	26140	50RB#50	18.26	PASS
Band25	20MHz	16QAM	26140	50RB#50	18.27	PASS
Band25	20MHz	QPSK	26140	100RB#0	18.36	PASS
Band25	20MHz	16QAM	26140	100RB#0	18.33	PASS
Band25	20MHz	QPSK	26365	1RB#0	18.52	PASS
Band25	20MHz	16QAM	26365	1RB#0	18.61	PASS
Band25	20MHz	QPSK	26365	1RB#49	18.57	PASS
Band25	20MHz	16QAM	26365	1RB#49	18.72	PASS
Band25	20MHz	QPSK	26365	1RB#99	18.55	PASS
Band25	20MHz	16QAM	26365	1RB#99	18.70	PASS
Band25	20MHz	QPSK	26365	50RB#0	18.49	PASS
Band25	20MHz	16QAM	26365	50RB#0	18.48	PASS
Band25	20MHz	QPSK	26365	50RB#25	18.48	PASS
Band25	20MHz	16QAM	26365	50RB#25	18.49	PASS
Band25	20MHz	QPSK	26365	50RB#50	18.47	PASS
Band25	20MHz	16QAM	26365	50RB#50	18.46	PASS
Band25	20MHz	QPSK	26365	100RB#0	18.45	PASS
Band25	20MHz	16QAM	26365	100RB#0	18.43	PASS
Band25	20MHz	QPSK	26590	1RB#0	18.68	PASS
Band25	20MHz	16QAM	26590	1RB#0	18.54	PASS
Band25	20MHz	QPSK	26590	1RB#49	18.71	PASS
Band25	20MHz	16QAM	26590	1RB#49	18.57	PASS
Band25	20MHz	QPSK	26590	1RB#99	18.79	PASS
Band25	20MHz	16QAM	26590	1RB#99	18.64	PASS
Band25	20MHz	QPSK	26590	50RB#0	18.51	PASS
Band25	20MHz	16QAM	26590	50RB#0	18.51	PASS
Band25	20MHz	QPSK	26590	50RB#25	18.53	PASS
Band25	20MHz	16QAM	26590	50RB#25	18.49	PASS
Band25	20MHz	QPSK	26590	50RB#50	18.61	PASS
Band25	20MHz	16QAM	26590	50RB#50	18.61	PASS
Band25	20MHz	QPSK	26590	100RB#0	18.59	PASS
Band25	20MHz	16QAM	26590	100RB#0	18.54	PASS

Band 26(814-824MHz) (P1):

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
26(814-824)	1.4MHz	QPSK	26697	1RB#0	23.77	PASS
26(814-824)	1.4MHz	16QAM	26697	1RB#0	22.71	PASS
26(814-824)	1.4MHz	QPSK	26697	1RB#2	23.74	PASS
26(814-824)	1.4MHz	16QAM	26697	1RB#2	22.72	PASS
26(814-824)	1.4MHz	QPSK	26697	1RB#5	23.76	PASS
26(814-824)	1.4MHz	16QAM	26697	1RB#5	22.69	PASS
26(814-824)	1.4MHz	QPSK	26697	3RB#0	23.77	PASS
26(814-824)	1.4MHz	16QAM	26697	3RB#0	22.65	PASS
26(814-824)	1.4MHz	QPSK	26697	3RB#1	23.78	PASS
26(814-824)	1.4MHz	16QAM	26697	3RB#1	22.65	PASS
26(814-824)	1.4MHz	QPSK	26697	3RB#3	23.74	PASS
26(814-824)	1.4MHz	16QAM	26697	3RB#3	22.59	PASS
26(814-824)	1.4MHz	QPSK	26697	6RB#0	22.84	PASS
26(814-824)	1.4MHz	16QAM	26697	6RB#0	21.82	PASS
26(814-824)	1.4MHz	QPSK	26740	1RB#0	23.84	PASS
26(814-824)	1.4MHz	16QAM	26740	1RB#0	22.78	PASS
26(814-824)	1.4MHz	QPSK	26740	1RB#2	23.84	PASS
26(814-824)	1.4MHz	16QAM	26740	1RB#2	22.82	PASS
26(814-824)	1.4MHz	QPSK	26740	1RB#5	23.84	PASS
26(814-824)	1.4MHz	16QAM	26740	1RB#5	22.73	PASS
26(814-824)	1.4MHz	QPSK	26740	3RB#0	23.84	PASS
26(814-824)	1.4MHz	16QAM	26740	3RB#0	22.65	PASS
26(814-824)	1.4MHz	QPSK	26740	3RB#1	23.83	PASS
26(814-824)	1.4MHz	16QAM	26740	3RB#1	22.65	PASS
26(814-824)	1.4MHz	QPSK	26740	3RB#3	23.80	PASS
26(814-824)	1.4MHz	16QAM	26740	3RB#3	22.59	PASS
26(814-824)	1.4MHz	QPSK	26740	6RB#0	22.88	PASS
26(814-824)	1.4MHz	16QAM	26740	6RB#0	21.86	PASS
26(814-824)	1.4MHz	QPSK	26783	1RB#0	23.80	PASS
26(814-824)	1.4MHz	16QAM	26783	1RB#0	22.60	PASS
26(814-824)	1.4MHz	QPSK	26783	1RB#2	23.74	PASS
26(814-824)	1.4MHz	16QAM	26783	1RB#2	22.65	PASS
26(814-824)	1.4MHz	QPSK	26783	1RB#5	23.78	PASS
26(814-824)	1.4MHz	16QAM	26783	1RB#5	22.61	PASS
26(814-824)	1.4MHz	QPSK	26783	3RB#0	23.79	PASS
26(814-824)	1.4MHz	16QAM	26783	3RB#0	22.58	PASS
26(814-824)	1.4MHz	QPSK	26783	3RB#1	23.81	PASS
26(814-824)	1.4MHz	16QAM	26783	3RB#1	22.58	PASS
26(814-824)	1.4MHz	QPSK	26783	3RB#3	23.77	PASS

26(814-824)	1.4MHz	16QAM	26783	3RB#3	22.56	PASS
26(814-824)	1.4MHz	QPSK	26783	6RB#0	22.78	PASS
26(814-824)	1.4MHz	16QAM	26783	6RB#0	21.60	PASS
26(814-824)	3MHz	QPSK	26705	1RB#0	23.84	PASS
26(814-824)	3MHz	16QAM	26705	1RB#0	22.81	PASS
26(814-824)	3MHz	QPSK	26705	1RB#8	23.79	PASS
26(814-824)	3MHz	16QAM	26705	1RB#8	22.78	PASS
26(814-824)	3MHz	QPSK	26705	1RB#14	23.81	PASS
26(814-824)	3MHz	16QAM	26705	1RB#14	22.78	PASS
26(814-824)	3MHz	QPSK	26705	8RB#0	22.82	PASS
26(814-824)	3MHz	16QAM	26705	8RB#0	21.86	PASS
26(814-824)	3MHz	QPSK	26705	8RB#4	22.83	PASS
26(814-824)	3MHz	16QAM	26705	8RB#4	21.82	PASS
26(814-824)	3MHz	QPSK	26705	8RB#7	22.81	PASS
26(814-824)	3MHz	16QAM	26705	8RB#7	21.79	PASS
26(814-824)	3MHz	QPSK	26705	15RB#0	22.80	PASS
26(814-824)	3MHz	16QAM	26705	15RB#0	21.81	PASS
26(814-824)	3MHz	QPSK	26740	1RB#0	23.86	PASS
26(814-824)	3MHz	16QAM	26740	1RB#0	22.72	PASS
26(814-824)	3MHz	QPSK	26740	1RB#8	23.88	PASS
26(814-824)	3MHz	16QAM	26740	1RB#8	22.68	PASS
26(814-824)	3MHz	QPSK	26740	1RB#14	23.88	PASS
26(814-824)	3MHz	16QAM	26740	1RB#14	22.66	PASS
26(814-824)	3MHz	QPSK	26740	8RB#0	22.86	PASS
26(814-824)	3MHz	16QAM	26740	8RB#0	21.83	PASS
26(814-824)	3MHz	QPSK	26740	8RB#4	22.84	PASS
26(814-824)	3MHz	16QAM	26740	8RB#4	21.84	PASS
26(814-824)	3MHz	QPSK	26740	8RB#7	22.83	PASS
26(814-824)	3MHz	16QAM	26740	8RB#7	21.82	PASS
26(814-824)	3MHz	QPSK	26740	15RB#0	22.86	PASS
26(814-824)	3MHz	16QAM	26740	15RB#0	21.76	PASS
26(814-824)	3MHz	QPSK	26775	1RB#0	23.81	PASS
26(814-824)	3MHz	16QAM	26775	1RB#0	22.56	PASS
26(814-824)	3MHz	QPSK	26775	1RB#8	23.76	PASS
26(814-824)	3MHz	16QAM	26775	1RB#8	22.51	PASS
26(814-824)	3MHz	QPSK	26775	1RB#14	23.77	PASS
26(814-824)	3MHz	16QAM	26775	1RB#14	22.50	PASS
26(814-824)	3MHz	QPSK	26775	8RB#0	22.81	PASS
26(814-824)	3MHz	16QAM	26775	8RB#0	21.78	PASS
26(814-824)	3MHz	QPSK	26775	8RB#4	22.82	PASS
26(814-824)	3MHz	16QAM	26775	8RB#4	21.79	PASS
26(814-824)	3MHz	QPSK	26775	8RB#7	22.81	PASS

26(814-824)	3MHz	16QAM	26775	8RB#7	21.79	PASS
26(814-824)	3MHz	QPSK	26775	15RB#0	22.77	PASS
26(814-824)	3MHz	16QAM	26775	15RB#0	21.66	PASS
26(814-824)	5MHz	QPSK	26715	1RB#0	24.08	PASS
26(814-824)	5MHz	16QAM	26715	1RB#0	22.86	PASS
26(814-824)	5MHz	QPSK	26715	1RB#12	23.98	PASS
26(814-824)	5MHz	16QAM	26715	1RB#12	22.79	PASS
26(814-824)	5MHz	QPSK	26715	1RB#24	24.00	PASS
26(814-824)	5MHz	16QAM	26715	1RB#24	22.87	PASS
26(814-824)	5MHz	QPSK	26715	12RB#0	22.86	PASS
26(814-824)	5MHz	16QAM	26715	12RB#0	21.85	PASS
26(814-824)	5MHz	QPSK	26715	12RB#6	22.85	PASS
26(814-824)	5MHz	16QAM	26715	12RB#6	21.85	PASS
26(814-824)	5MHz	QPSK	26715	12RB#13	22.86	PASS
26(814-824)	5MHz	16QAM	26715	12RB#13	21.85	PASS
26(814-824)	5MHz	QPSK	26715	25RB#0	22.91	PASS
26(814-824)	5MHz	16QAM	26715	25RB#0	21.88	PASS
26(814-824)	5MHz	QPSK	26740	1RB#0	23.91	PASS
26(814-824)	5MHz	16QAM	26740	1RB#0	22.92	PASS
26(814-824)	5MHz	QPSK	26740	1RB#12	23.88	PASS
26(814-824)	5MHz	16QAM	26740	1RB#12	22.93	PASS
26(814-824)	5MHz	QPSK	26740	1RB#24	23.88	PASS
26(814-824)	5MHz	16QAM	26740	1RB#24	22.95	PASS
26(814-824)	5MHz	QPSK	26740	12RB#0	22.90	PASS
26(814-824)	5MHz	16QAM	26740	12RB#0	21.93	PASS
26(814-824)	5MHz	QPSK	26740	12RB#6	22.88	PASS
26(814-824)	5MHz	16QAM	26740	12RB#6	21.93	PASS
26(814-824)	5MHz	QPSK	26740	12RB#13	22.88	PASS
26(814-824)	5MHz	16QAM	26740	12RB#13	21.93	PASS
26(814-824)	5MHz	QPSK	26740	25RB#0	22.92	PASS
26(814-824)	5MHz	16QAM	26740	25RB#0	21.86	PASS
26(814-824)	5MHz	QPSK	26765	1RB#0	23.94	PASS
26(814-824)	5MHz	16QAM	26765	1RB#0	22.82	PASS
26(814-824)	5MHz	QPSK	26765	1RB#12	23.87	PASS
26(814-824)	5MHz	16QAM	26765	1RB#12	22.73	PASS
26(814-824)	5MHz	QPSK	26765	1RB#24	23.87	PASS
26(814-824)	5MHz	16QAM	26765	1RB#24	22.73	PASS
26(814-824)	5MHz	QPSK	26765	12RB#0	22.86	PASS
26(814-824)	5MHz	16QAM	26765	12RB#0	21.89	PASS
26(814-824)	5MHz	QPSK	26765	12RB#6	22.87	PASS
26(814-824)	5MHz	16QAM	26765	12RB#6	21.88	PASS
26(814-824)	5MHz	QPSK	26765	12RB#13	22.80	PASS

26(814-824)	5MHz	16QAM	26765	12RB#13	21.84	PASS
26(814-824)	5MHz	QPSK	26765	25RB#0	22.87	PASS
26(814-824)	5MHz	16QAM	26765	25RB#0	21.88	PASS
26(814-824)	10MHz	QPSK	26740	1RB#0	24.07	PASS
26(814-824)	10MHz	16QAM	26740	1RB#0	22.92	PASS
26(814-824)	10MHz	QPSK	26740	1RB#24	23.90	PASS
26(814-824)	10MHz	16QAM	26740	1RB#24	22.84	PASS
26(814-824)	10MHz	QPSK	26740	1RB#49	23.85	PASS
26(814-824)	10MHz	16QAM	26740	1RB#49	22.86	PASS
26(814-824)	10MHz	QPSK	26740	25RB#0	22.88	PASS
26(814-824)	10MHz	16QAM	26740	25RB#0	21.85	PASS
26(814-824)	10MHz	QPSK	26740	25RB#12	22.88	PASS
26(814-824)	10MHz	16QAM	26740	25RB#12	21.85	PASS
26(814-824)	10MHz	QPSK	26740	25RB#25	22.89	PASS
26(814-824)	10MHz	16QAM	26740	25RB#25	21.84	PASS
26(814-824)	10MHz	QPSK	26740	50RB#0	22.88	PASS
26(814-824)	10MHz	16QAM	26740	50RB#0	21.84	PASS

Band26(824-849MHz) (P1):

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
26(824-849)	1.4MHz	QPSK	26797	1RB#0	23.66	PASS
26(824-849)	1.4MHz	16QAM	26797	1RB#0	22.40	PASS
26(824-849)	1.4MHz	QPSK	26797	1RB#2	23.66	PASS
26(824-849)	1.4MHz	16QAM	26797	1RB#2	22.42	PASS
26(824-849)	1.4MHz	QPSK	26797	1RB#5	23.66	PASS
26(824-849)	1.4MHz	16QAM	26797	1RB#5	22.41	PASS
26(824-849)	1.4MHz	QPSK	26797	3RB#0	23.67	PASS
26(824-849)	1.4MHz	16QAM	26797	3RB#0	22.44	PASS
26(824-849)	1.4MHz	QPSK	26797	3RB#1	23.67	PASS
26(824-849)	1.4MHz	16QAM	26797	3RB#1	22.49	PASS
26(824-849)	1.4MHz	QPSK	26797	3RB#3	23.68	PASS
26(824-849)	1.4MHz	16QAM	26797	3RB#3	22.44	PASS
26(824-849)	1.4MHz	QPSK	26797	6RB#0	22.64	PASS
26(824-849)	1.4MHz	16QAM	26797	6RB#0	21.61	PASS
26(824-849)	1.4MHz	QPSK	26915	1RB#0	23.47	PASS
26(824-849)	1.4MHz	16QAM	26915	1RB#0	22.39	PASS
26(824-849)	1.4MHz	QPSK	26915	1RB#2	23.42	PASS
26(824-849)	1.4MHz	16QAM	26915	1RB#2	22.36	PASS
26(824-849)	1.4MHz	QPSK	26915	1RB#5	23.42	PASS
26(824-849)	1.4MHz	16QAM	26915	1RB#5	22.32	PASS
26(824-849)	1.4MHz	QPSK	26915	3RB#0	23.42	PASS

26(824-849)	1.4MHz	16QAM	26915	3RB#0	22.22	PASS
26(824-849)	1.4MHz	QPSK	26915	3RB#1	23.42	PASS
26(824-849)	1.4MHz	16QAM	26915	3RB#1	22.23	PASS
26(824-849)	1.4MHz	QPSK	26915	3RB#3	23.36	PASS
26(824-849)	1.4MHz	16QAM	26915	3RB#3	22.18	PASS
26(824-849)	1.4MHz	QPSK	26915	6RB#0	22.42	PASS
26(824-849)	1.4MHz	16QAM	26915	6RB#0	21.42	PASS
26(824-849)	1.4MHz	QPSK	27033	1RB#0	23.50	PASS
26(824-849)	1.4MHz	16QAM	27033	1RB#0	22.46	PASS
26(824-849)	1.4MHz	QPSK	27033	1RB#2	23.45	PASS
26(824-849)	1.4MHz	16QAM	27033	1RB#2	22.42	PASS
26(824-849)	1.4MHz	QPSK	27033	1RB#5	23.49	PASS
26(824-849)	1.4MHz	16QAM	27033	1RB#5	22.42	PASS
26(824-849)	1.4MHz	QPSK	27033	3RB#0	23.51	PASS
26(824-849)	1.4MHz	16QAM	27033	3RB#0	22.31	PASS
26(824-849)	1.4MHz	QPSK	27033	3RB#1	23.50	PASS
26(824-849)	1.4MHz	16QAM	27033	3RB#1	22.30	PASS
26(824-849)	1.4MHz	QPSK	27033	3RB#3	23.46	PASS
26(824-849)	1.4MHz	16QAM	27033	3RB#3	22.29	PASS
26(824-849)	1.4MHz	QPSK	27033	6RB#0	22.57	PASS
26(824-849)	1.4MHz	16QAM	27033	6RB#0	21.51	PASS
26(824-849)	3MHz	QPSK	26805	1RB#0	23.70	PASS
26(824-849)	3MHz	16QAM	26805	1RB#0	22.67	PASS
26(824-849)	3MHz	QPSK	26805	1RB#8	23.67	PASS
26(824-849)	3MHz	16QAM	26805	1RB#8	22.62	PASS
26(824-849)	3MHz	QPSK	26805	1RB#14	23.67	PASS
26(824-849)	3MHz	16QAM	26805	1RB#14	22.66	PASS
26(824-849)	3MHz	QPSK	26805	8RB#0	22.69	PASS
26(824-849)	3MHz	16QAM	26805	8RB#0	21.70	PASS
26(824-849)	3MHz	QPSK	26805	8RB#4	22.73	PASS
26(824-849)	3MHz	16QAM	26805	8RB#4	21.74	PASS
26(824-849)	3MHz	QPSK	26805	8RB#7	22.70	PASS
26(824-849)	3MHz	16QAM	26805	8RB#7	21.68	PASS
26(824-849)	3MHz	QPSK	26805	15RB#0	22.67	PASS
26(824-849)	3MHz	16QAM	26805	15RB#0	21.69	PASS
26(824-849)	3MHz	QPSK	26915	1RB#0	23.55	PASS
26(824-849)	3MHz	16QAM	26915	1RB#0	22.39	PASS
26(824-849)	3MHz	QPSK	26915	1RB#8	23.49	PASS
26(824-849)	3MHz	16QAM	26915	1RB#8	22.28	PASS
26(824-849)	3MHz	QPSK	26915	1RB#14	23.50	PASS
26(824-849)	3MHz	16QAM	26915	1RB#14	22.27	PASS
26(824-849)	3MHz	QPSK	26915	8RB#0	22.48	PASS

26(824-849)	3MHz	16QAM	26915	8RB#0	21.45	PASS
26(824-849)	3MHz	QPSK	26915	8RB#4	22.47	PASS
26(824-849)	3MHz	16QAM	26915	8RB#4	21.46	PASS
26(824-849)	3MHz	QPSK	26915	8RB#7	22.43	PASS
26(824-849)	3MHz	16QAM	26915	8RB#7	21.46	PASS
26(824-849)	3MHz	QPSK	26915	15RB#0	22.49	PASS
26(824-849)	3MHz	16QAM	26915	15RB#0	21.37	PASS
26(824-849)	3MHz	QPSK	27025	1RB#0	23.55	PASS
26(824-849)	3MHz	16QAM	27025	1RB#0	22.52	PASS
26(824-849)	3MHz	QPSK	27025	1RB#8	23.54	PASS
26(824-849)	3MHz	16QAM	27025	1RB#8	22.50	PASS
26(824-849)	3MHz	QPSK	27025	1RB#14	23.56	PASS
26(824-849)	3MHz	16QAM	27025	1RB#14	22.53	PASS
26(824-849)	3MHz	QPSK	27025	8RB#0	22.59	PASS
26(824-849)	3MHz	16QAM	27025	8RB#0	21.56	PASS
26(824-849)	3MHz	QPSK	27025	8RB#4	22.58	PASS
26(824-849)	3MHz	16QAM	27025	8RB#4	21.57	PASS
26(824-849)	3MHz	QPSK	27025	8RB#7	22.54	PASS
26(824-849)	3MHz	16QAM	27025	8RB#7	21.54	PASS
26(824-849)	3MHz	QPSK	27025	15RB#0	22.53	PASS
26(824-849)	3MHz	16QAM	27025	15RB#0	21.54	PASS
26(824-849)	5MHz	QPSK	26815	1RB#0	23.86	PASS
26(824-849)	5MHz	16QAM	26815	1RB#0	22.72	PASS
26(824-849)	5MHz	QPSK	26815	1RB#12	23.82	PASS
26(824-849)	5MHz	16QAM	26815	1RB#12	22.70	PASS
26(824-849)	5MHz	QPSK	26815	1RB#24	23.80	PASS
26(824-849)	5MHz	16QAM	26815	1RB#24	22.66	PASS
26(824-849)	5MHz	QPSK	26815	12RB#0	22.75	PASS
26(824-849)	5MHz	16QAM	26815	12RB#0	21.72	PASS
26(824-849)	5MHz	QPSK	26815	12RB#6	22.74	PASS
26(824-849)	5MHz	16QAM	26815	12RB#6	21.71	PASS
26(824-849)	5MHz	QPSK	26815	12RB#13	22.69	PASS
26(824-849)	5MHz	16QAM	26815	12RB#13	21.67	PASS
26(824-849)	5MHz	QPSK	26815	25RB#0	22.75	PASS
26(824-849)	5MHz	16QAM	26815	25RB#0	21.74	PASS
26(824-849)	5MHz	QPSK	26915	1RB#0	23.63	PASS
26(824-849)	5MHz	16QAM	26915	1RB#0	22.66	PASS
26(824-849)	5MHz	QPSK	26915	1RB#12	23.55	PASS
26(824-849)	5MHz	16QAM	26915	1RB#12	22.58	PASS
26(824-849)	5MHz	QPSK	26915	1RB#24	23.53	PASS
26(824-849)	5MHz	16QAM	26915	1RB#24	22.60	PASS
26(824-849)	5MHz	QPSK	26915	12RB#0	22.54	PASS

26(824-849)	5MHz	16QAM	26915	12RB#0	21.62	PASS
26(824-849)	5MHz	QPSK	26915	12RB#6	22.52	PASS
26(824-849)	5MHz	16QAM	26915	12RB#6	21.61	PASS
26(824-849)	5MHz	QPSK	26915	12RB#13	22.48	PASS
26(824-849)	5MHz	16QAM	26915	12RB#13	21.55	PASS
26(824-849)	5MHz	QPSK	26915	25RB#0	22.58	PASS
26(824-849)	5MHz	16QAM	26915	25RB#0	21.49	PASS
26(824-849)	5MHz	QPSK	27015	1RB#0	23.64	PASS
26(824-849)	5MHz	16QAM	27015	1RB#0	22.53	PASS
26(824-849)	5MHz	QPSK	27015	1RB#12	23.68	PASS
26(824-849)	5MHz	16QAM	27015	1RB#12	22.53	PASS
26(824-849)	5MHz	QPSK	27015	1RB#24	23.74	PASS
26(824-849)	5MHz	16QAM	27015	1RB#24	22.58	PASS
26(824-849)	5MHz	QPSK	27015	12RB#0	22.61	PASS
26(824-849)	5MHz	16QAM	27015	12RB#0	21.59	PASS
26(824-849)	5MHz	QPSK	27015	12RB#6	22.59	PASS
26(824-849)	5MHz	16QAM	27015	12RB#6	21.59	PASS
26(824-849)	5MHz	QPSK	27015	12RB#13	22.56	PASS
26(824-849)	5MHz	16QAM	27015	12RB#13	21.54	PASS
26(824-849)	5MHz	QPSK	27015	25RB#0	22.62	PASS
26(824-849)	5MHz	16QAM	27015	25RB#0	21.60	PASS
26(824-849)	10MHz	QPSK	26840	1RB#0	23.79	PASS
26(824-849)	10MHz	16QAM	26840	1RB#0	22.76	PASS
26(824-849)	10MHz	QPSK	26840	1RB#24	23.65	PASS
26(824-849)	10MHz	16QAM	26840	1RB#24	22.61	PASS
26(824-849)	10MHz	QPSK	26840	1RB#49	23.65	PASS
26(824-849)	10MHz	16QAM	26840	1RB#49	22.67	PASS
26(824-849)	10MHz	QPSK	26840	25RB#0	22.72	PASS
26(824-849)	10MHz	16QAM	26840	25RB#0	21.68	PASS
26(824-849)	10MHz	QPSK	26840	25RB#12	22.72	PASS
26(824-849)	10MHz	16QAM	26840	25RB#12	21.69	PASS
26(824-849)	10MHz	QPSK	26840	25RB#25	22.63	PASS
26(824-849)	10MHz	16QAM	26840	25RB#25	21.58	PASS
26(824-849)	10MHz	QPSK	26840	50RB#0	22.68	PASS
26(824-849)	10MHz	16QAM	26840	50RB#0	21.68	PASS
26(824-849)	10MHz	QPSK	26915	1RB#0	23.76	PASS
26(824-849)	10MHz	16QAM	26915	1RB#0	22.59	PASS
26(824-849)	10MHz	QPSK	26915	1RB#24	23.56	PASS
26(824-849)	10MHz	16QAM	26915	1RB#24	22.38	PASS
26(824-849)	10MHz	QPSK	26915	1RB#49	23.64	PASS
26(824-849)	10MHz	16QAM	26915	1RB#49	22.46	PASS
26(824-849)	10MHz	QPSK	26915	25RB#0	22.58	PASS

26(824-849)	10MHz	16QAM	26915	25RB#0	21.59	PASS
26(824-849)	10MHz	QPSK	26915	25RB#12	22.59	PASS
26(824-849)	10MHz	16QAM	26915	25RB#12	21.58	PASS
26(824-849)	10MHz	QPSK	26915	25RB#25	22.52	PASS
26(824-849)	10MHz	16QAM	26915	25RB#25	21.53	PASS
26(824-849)	10MHz	QPSK	26915	50RB#0	22.57	PASS
26(824-849)	10MHz	16QAM	26915	50RB#0	21.55	PASS
26(824-849)	10MHz	QPSK	26990	1RB#0	23.62	PASS
26(824-849)	10MHz	16QAM	26990	1RB#0	22.62	PASS
26(824-849)	10MHz	QPSK	26990	1RB#24	23.53	PASS
26(824-849)	10MHz	16QAM	26990	1RB#24	22.51	PASS
26(824-849)	10MHz	QPSK	26990	1RB#49	23.64	PASS
26(824-849)	10MHz	16QAM	26990	1RB#49	22.63	PASS
26(824-849)	10MHz	QPSK	26990	25RB#0	22.63	PASS
26(824-849)	10MHz	16QAM	26990	25RB#0	21.56	PASS
26(824-849)	10MHz	QPSK	26990	25RB#12	22.62	PASS
26(824-849)	10MHz	16QAM	26990	25RB#12	21.57	PASS
26(824-849)	10MHz	QPSK	26990	25RB#25	22.54	PASS
26(824-849)	10MHz	16QAM	26990	25RB#25	21.49	PASS
26(824-849)	10MHz	QPSK	26990	50RB#0	22.57	PASS
26(824-849)	10MHz	16QAM	26990	50RB#0	21.53	PASS
26(824-849)	15MHz	QPSK	26865	1RB#0	23.84	PASS
26(824-849)	15MHz	16QAM	26865	1RB#0	22.82	PASS
26(824-849)	15MHz	QPSK	26865	1RB#38	23.75	PASS
26(824-849)	15MHz	16QAM	26865	1RB#38	22.72	PASS
26(824-849)	15MHz	QPSK	26865	1RB#74	23.56	PASS
26(824-849)	15MHz	16QAM	26865	1RB#74	22.55	PASS
26(824-849)	15MHz	QPSK	26865	38RB#0	22.66	PASS
26(824-849)	15MHz	16QAM	26865	38RB#0	22.66	PASS
26(824-849)	15MHz	QPSK	26865	38RB#18	22.66	PASS
26(824-849)	15MHz	16QAM	26865	38RB#18	22.67	PASS
26(824-849)	15MHz	QPSK	26865	38RB#37	22.67	PASS
26(824-849)	15MHz	16QAM	26865	38RB#37	22.67	PASS
26(824-849)	15MHz	QPSK	26865	75RB#0	22.67	PASS
26(824-849)	15MHz	16QAM	26865	75RB#0	21.63	PASS
26(824-849)	15MHz	QPSK	26915	1RB#0	23.67	PASS
26(824-849)	15MHz	16QAM	26915	1RB#0	22.80	PASS
26(824-849)	15MHz	QPSK	26915	1RB#38	23.53	PASS
26(824-849)	15MHz	16QAM	26915	1RB#38	22.67	PASS
26(824-849)	15MHz	QPSK	26915	1RB#74	23.48	PASS
26(824-849)	15MHz	16QAM	26915	1RB#74	22.62	PASS
26(824-849)	15MHz	QPSK	26915	38RB#0	22.62	PASS

26(824-849)	15MHz	16QAM	26915	38RB#0	22.62	PASS
26(824-849)	15MHz	QPSK	26915	38RB#18	22.61	PASS
26(824-849)	15MHz	16QAM	26915	38RB#18	22.63	PASS
26(824-849)	15MHz	QPSK	26915	38RB#37	22.60	PASS
26(824-849)	15MHz	16QAM	26915	38RB#37	22.60	PASS
26(824-849)	15MHz	QPSK	26915	75RB#0	22.63	PASS
26(824-849)	15MHz	16QAM	26915	75RB#0	21.64	PASS
26(824-849)	15MHz	QPSK	26965	1RB#0	23.68	PASS
26(824-849)	15MHz	16QAM	26965	1RB#0	22.66	PASS
26(824-849)	15MHz	QPSK	26965	1RB#38	23.63	PASS
26(824-849)	15MHz	16QAM	26965	1RB#38	22.59	PASS
26(824-849)	15MHz	QPSK	26965	1RB#74	23.62	PASS
26(824-849)	15MHz	16QAM	26965	1RB#74	22.60	PASS
26(824-849)	15MHz	QPSK	26965	38RB#0	22.60	PASS
26(824-849)	15MHz	16QAM	26965	38RB#0	22.59	PASS
26(824-849)	15MHz	QPSK	26965	38RB#18	22.60	PASS
26(824-849)	15MHz	16QAM	26965	38RB#18	22.61	PASS
26(824-849)	15MHz	QPSK	26965	38RB#37	22.60	PASS
26(824-849)	15MHz	16QAM	26965	38RB#37	22.59	PASS
26(824-849)	15MHz	QPSK	26965	75RB#0	22.60	PASS
26(824-849)	15MHz	16QAM	26965	75RB#0	21.56	PASS

LTE(P1):

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band38	5MHz	QPSK	37775	1RB#0	21.13	PASS
Band38	5MHz	16QAM	37775	1RB#0	21.56	PASS
Band38	5MHz	QPSK	37775	1RB#12	21.80	PASS
Band38	5MHz	16QAM	37775	1RB#12	21.69	PASS
Band38	5MHz	QPSK	37775	1RB#24	21.88	PASS
Band38	5MHz	16QAM	37775	1RB#24	21.76	PASS
Band38	5MHz	QPSK	37775	12RB#0	21.59	PASS
Band38	5MHz	16QAM	37775	12RB#0	21.60	PASS
Band38	5MHz	QPSK	37775	12RB#6	21.60	PASS
Band38	5MHz	16QAM	37775	12RB#6	21.59	PASS
Band38	5MHz	QPSK	37775	12RB#13	21.67	PASS
Band38	5MHz	16QAM	37775	12RB#13	21.68	PASS
Band38	5MHz	QPSK	37775	25RB#0	21.67	PASS
Band38	5MHz	16QAM	37775	25RB#0	21.65	PASS
Band38	5MHz	QPSK	38000	1RB#0	21.89	PASS
Band38	5MHz	16QAM	38000	1RB#0	21.97	PASS

Band38	5MHz	QPSK	38000	1RB#12	21.85	PASS
Band38	5MHz	16QAM	38000	1RB#12	21.88	PASS
Band38	5MHz	QPSK	38000	1RB#24	21.88	PASS
Band38	5MHz	16QAM	38000	1RB#24	21.92	PASS
Band38	5MHz	QPSK	38000	12RB#0	21.87	PASS
Band38	5MHz	16QAM	38000	12RB#0	21.92	PASS
Band38	5MHz	QPSK	38000	12RB#6	21.86	PASS
Band38	5MHz	16QAM	38000	12RB#6	21.90	PASS
Band38	5MHz	QPSK	38000	12RB#13	21.85	PASS
Band38	5MHz	16QAM	38000	12RB#13	21.86	PASS
Band38	5MHz	QPSK	38000	25RB#0	21.86	PASS
Band38	5MHz	16QAM	38000	25RB#0	21.89	PASS
Band38	5MHz	QPSK	38225	1RB#0	22.23	PASS
Band38	5MHz	16QAM	38225	1RB#0	21.43	PASS
Band38	5MHz	QPSK	38225	1RB#12	22.15	PASS
Band38	5MHz	16QAM	38225	1RB#12	21.36	PASS
Band38	5MHz	QPSK	38225	1RB#24	22.15	PASS
Band38	5MHz	16QAM	38225	1RB#24	21.37	PASS
Band38	5MHz	QPSK	38225	12RB#0	21.14	PASS
Band38	5MHz	16QAM	38225	12RB#0	21.22	PASS
Band38	5MHz	QPSK	38225	12RB#6	21.14	PASS
Band38	5MHz	16QAM	38225	12RB#6	21.19	PASS
Band38	5MHz	QPSK	38225	12RB#13	21.06	PASS
Band38	5MHz	16QAM	38225	12RB#13	21.14	PASS
Band38	5MHz	QPSK	38225	25RB#0	21.15	PASS
Band38	5MHz	16QAM	38225	25RB#0	21.09	PASS
Band38	10MHz	QPSK	37800	1RB#0	21.64	PASS
Band38	10MHz	16QAM	37800	1RB#0	21.79	PASS
Band38	10MHz	QPSK	37800	1RB#24	21.74	PASS
Band38	10MHz	16QAM	37800	1RB#24	21.87	PASS
Band38	10MHz	QPSK	37800	1RB#49	21.45	PASS
Band38	10MHz	16QAM	37800	1RB#49	21.69	PASS
Band38	10MHz	QPSK	37800	25RB#0	21.53	PASS
Band38	10MHz	16QAM	37800	25RB#0	21.52	PASS
Band38	10MHz	QPSK	37800	25RB#12	21.55	PASS
Band38	10MHz	16QAM	37800	25RB#12	21.51	PASS
Band38	10MHz	QPSK	37800	25RB#25	21.68	PASS
Band38	10MHz	16QAM	37800	25RB#25	21.64	PASS
Band38	10MHz	QPSK	37800	50RB#0	21.63	PASS
Band38	10MHz	16QAM	37800	50RB#0	21.60	PASS
Band38	10MHz	QPSK	38000	1RB#0	21.83	PASS
Band38	10MHz	16QAM	38000	1RB#0	21.49	PASS

Band38	10MHz	QPSK	38000	1RB#24	21.69	PASS
Band38	10MHz	16QAM	38000	1RB#24	21.38	PASS
Band38	10MHz	QPSK	38000	1RB#49	21.80	PASS
Band38	10MHz	16QAM	38000	1RB#49	21.51	PASS
Band38	10MHz	QPSK	38000	25RB#0	21.73	PASS
Band38	10MHz	16QAM	38000	25RB#0	21.70	PASS
Band38	10MHz	QPSK	38000	25RB#12	21.74	PASS
Band38	10MHz	16QAM	38000	25RB#12	21.68	PASS
Band38	10MHz	QPSK	38000	25RB#25	21.71	PASS
Band38	10MHz	16QAM	38000	25RB#25	21.68	PASS
Band38	10MHz	QPSK	38000	50RB#0	21.73	PASS
Band38	10MHz	16QAM	38000	50RB#0	21.74	PASS
Band38	10MHz	QPSK	38200	1RB#0	22.18	PASS
Band38	10MHz	16QAM	38200	1RB#0	21.29	PASS
Band38	10MHz	QPSK	38200	1RB#24	22.07	PASS
Band38	10MHz	16QAM	38200	1RB#24	21.22	PASS
Band38	10MHz	QPSK	38200	1RB#49	22.11	PASS
Band38	10MHz	16QAM	38200	1RB#49	21.24	PASS
Band38	10MHz	QPSK	38200	25RB#0	21.04	PASS
Band38	10MHz	16QAM	38200	25RB#0	21.09	PASS
Band38	10MHz	QPSK	38200	25RB#12	21.06	PASS
Band38	10MHz	16QAM	38200	25RB#12	21.10	PASS
Band38	10MHz	QPSK	38200	25RB#25	21.03	PASS
Band38	10MHz	16QAM	38200	25RB#25	21.06	PASS
Band38	10MHz	QPSK	38200	50RB#0	21.06	PASS
Band38	10MHz	16QAM	38200	50RB#0	21.00	PASS
Band38	15MHz	QPSK	37825	1RB#0	21.67	PASS
Band38	15MHz	16QAM	37825	1RB#0	21.82	PASS
Band38	15MHz	QPSK	37825	1RB#38	21.89	PASS
Band38	15MHz	16QAM	37825	1RB#38	21.02	PASS
Band38	15MHz	QPSK	37825	1RB#74	21.92	PASS
Band38	15MHz	16QAM	37825	1RB#74	21.05	PASS
Band38	15MHz	QPSK	37825	38RB#0	21.78	PASS
Band38	15MHz	16QAM	37825	38RB#0	21.75	PASS
Band38	15MHz	QPSK	37825	38RB#18	21.74	PASS
Band38	15MHz	16QAM	37825	38RB#18	21.78	PASS
Band38	15MHz	QPSK	37825	38RB#37	21.75	PASS
Band38	15MHz	16QAM	37825	38RB#37	21.76	PASS
Band38	15MHz	QPSK	37825	75RB#0	21.78	PASS
Band38	15MHz	16QAM	37825	75RB#0	21.80	PASS
Band38	15MHz	QPSK	38000	1RB#0	21.93	PASS
Band38	15MHz	16QAM	38000	1RB#0	21.84	PASS

Band38	15MHz	QPSK	38000	1RB#38	21.92	PASS
Band38	15MHz	16QAM	38000	1RB#38	21.76	PASS
Band38	15MHz	QPSK	38000	1RB#74	21.85	PASS
Band38	15MHz	16QAM	38000	1RB#74	21.80	PASS
Band38	15MHz	QPSK	38000	38RB#0	21.83	PASS
Band38	15MHz	16QAM	38000	38RB#0	21.83	PASS
Band38	15MHz	QPSK	38000	38RB#18	21.81	PASS
Band38	15MHz	16QAM	38000	38RB#18	21.81	PASS
Band38	15MHz	QPSK	38000	38RB#37	21.82	PASS
Band38	15MHz	16QAM	38000	38RB#37	21.82	PASS
Band38	15MHz	QPSK	38000	75RB#0	21.81	PASS
Band38	15MHz	16QAM	38000	75RB#0	21.81	PASS
Band38	15MHz	QPSK	38175	1RB#0	22.16	PASS
Band38	15MHz	16QAM	38175	1RB#0	21.89	PASS
Band38	15MHz	QPSK	38175	1RB#38	22.25	PASS
Band38	15MHz	16QAM	38175	1RB#38	21.96	PASS
Band38	15MHz	QPSK	38175	1RB#74	22.22	PASS
Band38	15MHz	16QAM	38175	1RB#74	21.85	PASS
Band38	15MHz	QPSK	38175	38RB#0	21.06	PASS
Band38	15MHz	16QAM	38175	38RB#0	21.04	PASS
Band38	15MHz	QPSK	38175	38RB#18	21.06	PASS
Band38	15MHz	16QAM	38175	38RB#18	21.06	PASS
Band38	15MHz	QPSK	38175	38RB#37	21.05	PASS
Band38	15MHz	16QAM	38175	38RB#37	21.05	PASS
Band38	15MHz	QPSK	38175	75RB#0	21.06	PASS
Band38	15MHz	16QAM	38175	75RB#0	21.07	PASS
Band38	20MHz	QPSK	37850	1RB#0	21.64	PASS
Band38	20MHz	16QAM	37850	1RB#0	21.71	PASS
Band38	20MHz	QPSK	37850	1RB#49	21.89	PASS
Band38	20MHz	16QAM	37850	1RB#49	21.91	PASS
Band38	20MHz	QPSK	37850	1RB#99	21.89	PASS
Band38	20MHz	16QAM	37850	1RB#99	21.90	PASS
Band38	20MHz	QPSK	37850	50RB#0	21.82	PASS
Band38	20MHz	16QAM	37850	50RB#0	21.82	PASS
Band38	20MHz	QPSK	37850	50RB#25	21.83	PASS
Band38	20MHz	16QAM	37850	50RB#25	21.79	PASS
Band38	20MHz	QPSK	37850	50RB#50	21.86	PASS
Band38	20MHz	16QAM	37850	50RB#50	21.89	PASS
Band38	20MHz	QPSK	37850	100RB#0	21.87	PASS
Band38	20MHz	16QAM	37850	100RB#0	21.81	PASS
Band38	20MHz	QPSK	38000	1RB#0	22.32	PASS
Band38	20MHz	16QAM	38000	1RB#0	20.67	PASS

Band38	20MHz	QPSK	38000	1RB#49	21.99	PASS
Band38	20MHz	16QAM	38000	1RB#49	21.59	PASS
Band38	20MHz	QPSK	38000	1RB#99	22.01	PASS
Band38	20MHz	16QAM	38000	1RB#99	21.63	PASS
Band38	20MHz	QPSK	38000	50RB#0	21.92	PASS
Band38	20MHz	16QAM	38000	50RB#0	21.84	PASS
Band38	20MHz	QPSK	38000	50RB#25	21.91	PASS
Band38	20MHz	16QAM	38000	50RB#25	21.83	PASS
Band38	20MHz	QPSK	38000	50RB#50	21.87	PASS
Band38	20MHz	16QAM	38000	50RB#50	21.81	PASS
Band38	20MHz	QPSK	38000	100RB#0	21.85	PASS
Band38	20MHz	16QAM	38000	100RB#0	21.84	PASS
Band38	20MHz	QPSK	38150	1RB#0	21.82	PASS
Band38	20MHz	16QAM	38150	1RB#0	21.49	PASS
Band38	20MHz	QPSK	38150	1RB#49	21.97	PASS
Band38	20MHz	16QAM	38150	1RB#49	21.62	PASS
Band38	20MHz	QPSK	38150	1RB#99	21.95	PASS
Band38	20MHz	16QAM	38150	1RB#99	21.54	PASS
Band38	20MHz	QPSK	38150	50RB#0	21.03	PASS
Band38	20MHz	16QAM	38150	50RB#0	21.02	PASS
Band38	20MHz	QPSK	38150	50RB#25	21.03	PASS
Band38	20MHz	16QAM	38150	50RB#25	21.03	PASS
Band38	20MHz	QPSK	38150	50RB#50	21.03	PASS
Band38	20MHz	16QAM	38150	50RB#50	21.10	PASS
Band38	20MHz	QPSK	38150	100RB#0	21.03	PASS
Band38	20MHz	16QAM	38150	100RB#0	21.02	PASS

LTE(P4): Sensor ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band38	5MHz	QPSK	37775	1RB#0	21.12	PASS
Band38	5MHz	16QAM	37775	1RB#0	20.36	PASS
Band38	5MHz	QPSK	37775	1RB#12	20.54	PASS
Band38	5MHz	16QAM	37775	1RB#12	20.25	PASS
Band38	5MHz	QPSK	37775	1RB#24	20.25	PASS
Band38	5MHz	16QAM	37775	1RB#24	20.65	PASS
Band38	5MHz	QPSK	37775	12RB#0	20.41	PASS
Band38	5MHz	16QAM	37775	12RB#0	20.25	PASS
Band38	5MHz	QPSK	37775	12RB#6	20.36	PASS
Band38	5MHz	16QAM	37775	12RB#6	20.54	PASS
Band38	5MHz	QPSK	37775	12RB#13	20.25	PASS
Band38	5MHz	16QAM	37775	12RB#13	20.35	PASS

Band38	5MHz	QPSK	37775	25RB#0	20.22	PASS
Band38	5MHz	16QAM	37775	25RB#0	20.35	PASS
Band38	5MHz	QPSK	38000	1RB#0	20.25	PASS
Band38	5MHz	16QAM	38000	1RB#0	20.35	PASS
Band38	5MHz	QPSK	38000	1RB#12	20.45	PASS
Band38	5MHz	16QAM	38000	1RB#12	20.52	PASS
Band38	5MHz	QPSK	38000	1RB#24	20.65	PASS
Band38	5MHz	16QAM	38000	1RB#24	20.25	PASS
Band38	5MHz	QPSK	38000	12RB#0	20.62	PASS
Band38	5MHz	16QAM	38000	12RB#0	20.25	PASS
Band38	5MHz	QPSK	38000	12RB#6	20.64	PASS
Band38	5MHz	16QAM	38000	12RB#6	20.54	PASS
Band38	5MHz	QPSK	38000	12RB#13	20.25	PASS
Band38	5MHz	16QAM	38000	12RB#13	20.36	PASS
Band38	5MHz	QPSK	38000	25RB#0	20.54	PASS
Band38	5MHz	16QAM	38000	25RB#0	20.54	PASS
Band38	5MHz	QPSK	38225	1RB#0	20.54	PASS
Band38	5MHz	16QAM	38225	1RB#0	20.65	PASS
Band38	5MHz	QPSK	38225	1RB#12	20.08	PASS
Band38	5MHz	16QAM	38225	1RB#12	20.09	PASS
Band38	5MHz	QPSK	38225	1RB#24	20.12	PASS
Band38	5MHz	16QAM	38225	1RB#24	20.05	PASS
Band38	5MHz	QPSK	38225	12RB#0	20.02	PASS
Band38	5MHz	16QAM	38225	12RB#0	20.03	PASS
Band38	5MHz	QPSK	38225	12RB#6	20.01	PASS
Band38	5MHz	16QAM	38225	12RB#6	20.02	PASS
Band38	5MHz	QPSK	38225	12RB#13	20.03	PASS
Band38	5MHz	16QAM	38225	12RB#13	20.06	PASS
Band38	5MHz	QPSK	38225	25RB#0	20.05	PASS
Band38	5MHz	16QAM	38225	25RB#0	20.05	PASS
Band38	10MHz	QPSK	37800	1RB#0	20.53	PASS
Band38	10MHz	16QAM	37800	1RB#0	20.42	PASS
Band38	10MHz	QPSK	37800	1RB#24	20.40	PASS
Band38	10MHz	16QAM	37800	1RB#24	20.29	PASS
Band38	10MHz	QPSK	37800	1RB#49	20.12	PASS
Band38	10MHz	16QAM	37800	1RB#49	20.25	PASS
Band38	10MHz	QPSK	37800	25RB#0	20.35	PASS
Band38	10MHz	16QAM	37800	25RB#0	20.54	PASS
Band38	10MHz	QPSK	37800	25RB#12	20.23	PASS
Band38	10MHz	16QAM	37800	25RB#12	20.25	PASS
Band38	10MHz	QPSK	37800	25RB#25	20.42	PASS
Band38	10MHz	16QAM	37800	25RB#25	20.36	PASS

Band38	10MHz	QPSK	37800	50RB#0	20.54	PASS
Band38	10MHz	16QAM	37800	50RB#0	20.25	PASS
Band38	10MHz	QPSK	38000	1RB#0	20.36	PASS
Band38	10MHz	16QAM	38000	1RB#0	20.54	PASS
Band38	10MHz	QPSK	38000	1RB#24	20.25	PASS
Band38	10MHz	16QAM	38000	1RB#24	20.24	PASS
Band38	10MHz	QPSK	38000	1RB#49	20.26	PASS
Band38	10MHz	16QAM	38000	1RB#49	20.25	PASS
Band38	10MHz	QPSK	38000	25RB#0	20.36	PASS
Band38	10MHz	16QAM	38000	25RB#0	20.54	PASS
Band38	10MHz	QPSK	38000	25RB#12	20.25	PASS
Band38	10MHz	16QAM	38000	25RB#12	20.36	PASS
Band38	10MHz	QPSK	38000	25RB#25	20.54	PASS
Band38	10MHz	16QAM	38000	25RB#25	20.25	PASS
Band38	10MHz	QPSK	38000	50RB#0	20.36	PASS
Band38	10MHz	16QAM	38000	50RB#0	20.54	PASS
Band38	10MHz	QPSK	38200	1RB#0	20.25	PASS
Band38	10MHz	16QAM	38200	1RB#0	20.45	PASS
Band38	10MHz	QPSK	38200	1RB#24	20.25	PASS
Band38	10MHz	16QAM	38200	1RB#24	20.24	PASS
Band38	10MHz	QPSK	38200	1RB#49	20.25	PASS
Band38	10MHz	16QAM	38200	1RB#49	20.36	PASS
Band38	10MHz	QPSK	38200	25RB#0	20.45	PASS
Band38	10MHz	16QAM	38200	25RB#0	20.25	PASS
Band38	10MHz	QPSK	38200	25RB#12	20.25	PASS
Band38	10MHz	16QAM	38200	25RB#12	20.24	PASS
Band38	10MHz	QPSK	38200	25RB#25	20.14	PASS
Band38	10MHz	16QAM	38200	25RB#25	20.25	PASS
Band38	10MHz	QPSK	38200	50RB#0	20.25	PASS
Band38	10MHz	16QAM	38200	50RB#0	20.35	PASS
Band38	15MHz	QPSK	37825	1RB#0	20.45	PASS
Band38	15MHz	16QAM	37825	1RB#0	20.25	PASS
Band38	15MHz	QPSK	37825	1RB#38	20.35	PASS
Band38	15MHz	16QAM	37825	1RB#38	20.45	PASS
Band38	15MHz	QPSK	37825	1RB#74	20.25	PASS
Band38	15MHz	16QAM	37825	1RB#74	20.42	PASS
Band38	15MHz	QPSK	37825	38RB#0	20.35	PASS
Band38	15MHz	16QAM	37825	38RB#0	20.54	PASS
Band38	15MHz	QPSK	37825	38RB#18	20.45	PASS
Band38	15MHz	16QAM	37825	38RB#18	20.35	PASS
Band38	15MHz	QPSK	37825	38RB#37	20.54	PASS
Band38	15MHz	16QAM	37825	38RB#37	20.25	PASS

Band38	15MHz	QPSK	37825	75RB#0	20.36	PASS
Band38	15MHz	16QAM	37825	75RB#0	20.54	PASS
Band38	15MHz	QPSK	38000	1RB#0	20.25	PASS
Band38	15MHz	16QAM	38000	1RB#0	20.35	PASS
Band38	15MHz	QPSK	38000	1RB#38	20.45	PASS
Band38	15MHz	16QAM	38000	1RB#38	20.25	PASS
Band38	15MHz	QPSK	38000	1RB#74	20.35	PASS
Band38	15MHz	16QAM	38000	1RB#74	20.54	PASS
Band38	15MHz	QPSK	38000	38RB#0	20.25	PASS
Band38	15MHz	16QAM	38000	38RB#0	20.36	PASS
Band38	15MHz	QPSK	38000	38RB#18	20.54	PASS
Band38	15MHz	16QAM	38000	38RB#18	20.24	PASS
Band38	15MHz	QPSK	38000	38RB#37	20.54	PASS
Band38	15MHz	16QAM	38000	38RB#37	20.74	PASS
Band38	15MHz	QPSK	38000	75RB#0	20.26	PASS
Band38	15MHz	16QAM	38000	75RB#0	20.54	PASS
Band38	15MHz	QPSK	38175	1RB#0	20.08	PASS
Band38	15MHz	16QAM	38175	1RB#0	20.45	PASS
Band38	15MHz	QPSK	38175	1RB#38	20.01	PASS
Band38	15MHz	16QAM	38175	1RB#38	20.02	PASS
Band38	15MHz	QPSK	38175	1RB#74	20.02	PASS
Band38	15MHz	16QAM	38175	1RB#74	20.36	PASS
Band38	15MHz	QPSK	38175	38RB#0	20.12	PASS
Band38	15MHz	16QAM	38175	38RB#0	20.25	PASS
Band38	15MHz	QPSK	38175	38RB#18	20.25	PASS
Band38	15MHz	16QAM	38175	38RB#18	20.25	PASS
Band38	15MHz	QPSK	38175	38RB#37	20.41	PASS
Band38	15MHz	16QAM	38175	38RB#37	20.05	PASS
Band38	15MHz	QPSK	38175	75RB#0	20.08	PASS
Band38	15MHz	16QAM	38175	75RB#0	20.06	PASS
Band38	20MHz	QPSK	37850	1RB#0	20.65	PASS
Band38	20MHz	16QAM	37850	1RB#0	20.64	PASS
Band38	20MHz	QPSK	37850	1RB#49	20.54	PASS
Band38	20MHz	16QAM	37850	1RB#49	20.25	PASS
Band38	20MHz	QPSK	37850	1RB#99	20.35	PASS
Band38	20MHz	16QAM	37850	1RB#99	20.25	PASS
Band38	20MHz	QPSK	37850	50RB#0	20.45	PASS
Band38	20MHz	16QAM	37850	50RB#0	20.25	PASS
Band38	20MHz	QPSK	37850	50RB#25	20.35	PASS
Band38	20MHz	16QAM	37850	50RB#25	20.12	PASS
Band38	20MHz	QPSK	37850	50RB#50	20.25	PASS
Band38	20MHz	16QAM	37850	50RB#50	20.54	PASS

Band38	20MHz	QPSK	37850	100RB#0	20.24	PASS
Band38	20MHz	16QAM	37850	100RB#0	20.25	PASS
Band38	20MHz	QPSK	38000	1RB#0	20.36	PASS
Band38	20MHz	16QAM	38000	1RB#0	20.54	PASS
Band38	20MHz	QPSK	38000	1RB#49	20.25	PASS
Band38	20MHz	16QAM	38000	1RB#49	20.45	PASS
Band38	20MHz	QPSK	38000	1RB#99	20.25	PASS
Band38	20MHz	16QAM	38000	1RB#99	20.24	PASS
Band38	20MHz	QPSK	38000	50RB#0	20.75	PASS
Band38	20MHz	16QAM	38000	50RB#0	20.56	PASS
Band38	20MHz	QPSK	38000	50RB#25	20.45	PASS
Band38	20MHz	16QAM	38000	50RB#25	20.64	PASS
Band38	20MHz	QPSK	38000	50RB#50	20.54	PASS
Band38	20MHz	16QAM	38000	50RB#50	20.54	PASS
Band38	20MHz	QPSK	38000	100RB#0	20.25	PASS
Band38	20MHz	16QAM	38000	100RB#0	20.36	PASS
Band38	20MHz	QPSK	38150	1RB#0	20.54	PASS
Band38	20MHz	16QAM	38150	1RB#0	20.45	PASS
Band38	20MHz	QPSK	38150	1RB#49	20.25	PASS
Band38	20MHz	16QAM	38150	1RB#49	20.54	PASS
Band38	20MHz	QPSK	38150	1RB#99	20.25	PASS
Band38	20MHz	16QAM	38150	1RB#99	20.35	PASS
Band38	20MHz	QPSK	38150	50RB#0	20.54	PASS
Band38	20MHz	16QAM	38150	50RB#0	20.25	PASS
Band38	20MHz	QPSK	38150	50RB#25	20.45	PASS
Band38	20MHz	16QAM	38150	50RB#25	20.25	PASS
Band38	20MHz	QPSK	38150	50RB#50	20.65	PASS
Band38	20MHz	16QAM	38150	50RB#50	20.45	PASS
Band38	20MHz	QPSK	38150	100RB#0	20.25	PASS
Band38	20MHz	16QAM	38150	100RB#0	20.25	PASS

LTE(P3): Hotspot ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band38	5MHz	QPSK	37775	1RB#0	19.54	PASS
Band38	5MHz	16QAM	37775	1RB#0	19.84	PASS
Band38	5MHz	QPSK	37775	1RB#12	19.60	PASS
Band38	5MHz	16QAM	37775	1RB#12	19.94	PASS
Band38	5MHz	QPSK	37775	1RB#24	19.72	PASS
Band38	5MHz	16QAM	37775	1RB#24	20.04	PASS
Band38	5MHz	QPSK	37775	12RB#0	19.50	PASS
Band38	5MHz	16QAM	37775	12RB#0	19.47	PASS

Band38	5MHz	QPSK	37775	12RB#6	19.54	PASS
Band38	5MHz	16QAM	37775	12RB#6	19.48	PASS
Band38	5MHz	QPSK	37775	12RB#13	19.60	PASS
Band38	5MHz	16QAM	37775	12RB#13	19.59	PASS
Band38	5MHz	QPSK	37775	25RB#0	19.61	PASS
Band38	5MHz	16QAM	37775	25RB#0	19.56	PASS
Band38	5MHz	QPSK	38000	1RB#0	19.77	PASS
Band38	5MHz	16QAM	38000	1RB#0	19.89	PASS
Band38	5MHz	QPSK	38000	1RB#12	19.71	PASS
Band38	5MHz	16QAM	38000	1RB#12	19.83	PASS
Band38	5MHz	QPSK	38000	1RB#24	19.72	PASS
Band38	5MHz	16QAM	38000	1RB#24	19.85	PASS
Band38	5MHz	QPSK	38000	12RB#0	19.77	PASS
Band38	5MHz	16QAM	38000	12RB#0	19.78	PASS
Band38	5MHz	QPSK	38000	12RB#6	19.77	PASS
Band38	5MHz	16QAM	38000	12RB#6	19.82	PASS
Band38	5MHz	QPSK	38000	12RB#13	19.71	PASS
Band38	5MHz	16QAM	38000	12RB#13	19.81	PASS
Band38	5MHz	QPSK	38000	25RB#0	19.78	PASS
Band38	5MHz	16QAM	38000	25RB#0	19.73	PASS
Band38	5MHz	QPSK	38225	1RB#0	20.14	PASS
Band38	5MHz	16QAM	38225	1RB#0	20.13	PASS
Band38	5MHz	QPSK	38225	1RB#12	20.07	PASS
Band38	5MHz	16QAM	38225	1RB#12	20.06	PASS
Band38	5MHz	QPSK	38225	1RB#24	20.08	PASS
Band38	5MHz	16QAM	38225	1RB#24	20.05	PASS
Band38	5MHz	QPSK	38225	12RB#0	20.08	PASS
Band38	5MHz	16QAM	38225	12RB#0	20.04	PASS
Band38	5MHz	QPSK	38225	12RB#6	20.09	PASS
Band38	5MHz	16QAM	38225	12RB#6	20.06	PASS
Band38	5MHz	QPSK	38225	12RB#13	20.02	PASS
Band38	5MHz	16QAM	38225	12RB#13	20.00	PASS
Band38	5MHz	QPSK	38225	25RB#0	20.09	PASS
Band38	5MHz	16QAM	38225	25RB#0	20.05	PASS
Band38	10MHz	QPSK	37800	1RB#0	19.56	PASS
Band38	10MHz	16QAM	37800	1RB#0	19.73	PASS
Band38	10MHz	QPSK	37800	1RB#24	19.70	PASS
Band38	10MHz	16QAM	37800	1RB#24	19.89	PASS
Band38	10MHz	QPSK	37800	1RB#49	19.82	PASS
Band38	10MHz	16QAM	37800	1RB#49	20.02	PASS
Band38	10MHz	QPSK	37800	25RB#0	19.61	PASS
Band38	10MHz	16QAM	37800	25RB#0	19.64	PASS

Band38	10MHz	QPSK	37800	25RB#12	19.60	PASS
Band38	10MHz	16QAM	37800	25RB#12	19.64	PASS
Band38	10MHz	QPSK	37800	25RB#25	19.77	PASS
Band38	10MHz	16QAM	37800	25RB#25	19.78	PASS
Band38	10MHz	QPSK	37800	50RB#0	19.69	PASS
Band38	10MHz	16QAM	37800	50RB#0	19.67	PASS
Band38	10MHz	QPSK	38000	1RB#0	19.89	PASS
Band38	10MHz	16QAM	38000	1RB#0	19.49	PASS
Band38	10MHz	QPSK	38000	1RB#24	19.75	PASS
Band38	10MHz	16QAM	38000	1RB#24	19.40	PASS
Band38	10MHz	QPSK	38000	1RB#49	19.83	PASS
Band38	10MHz	16QAM	38000	1RB#49	19.50	PASS
Band38	10MHz	QPSK	38000	25RB#0	19.75	PASS
Band38	10MHz	16QAM	38000	25RB#0	19.73	PASS
Band38	10MHz	QPSK	38000	25RB#12	19.75	PASS
Band38	10MHz	16QAM	38000	25RB#12	19.72	PASS
Band38	10MHz	QPSK	38000	25RB#25	19.76	PASS
Band38	10MHz	16QAM	38000	25RB#25	19.73	PASS
Band38	10MHz	QPSK	38000	50RB#0	19.76	PASS
Band38	10MHz	16QAM	38000	50RB#0	19.74	PASS
Band38	10MHz	QPSK	38200	1RB#0	20.11	PASS
Band38	10MHz	16QAM	38200	1RB#0	20.05	PASS
Band38	10MHz	QPSK	38200	1RB#24	20.08	PASS
Band38	10MHz	16QAM	38200	1RB#24	19.98	PASS
Band38	10MHz	QPSK	38200	1RB#49	20.04	PASS
Band38	10MHz	16QAM	38200	1RB#49	19.96	PASS
Band38	10MHz	QPSK	38200	25RB#0	20.06	PASS
Band38	10MHz	16QAM	38200	25RB#0	20.08	PASS
Band38	10MHz	QPSK	38200	25RB#12	20.10	PASS
Band38	10MHz	16QAM	38200	25RB#12	20.09	PASS
Band38	10MHz	QPSK	38200	25RB#25	20.08	PASS
Band38	10MHz	16QAM	38200	25RB#25	20.05	PASS
Band38	10MHz	QPSK	38200	50RB#0	20.07	PASS
Band38	10MHz	16QAM	38200	50RB#0	20.03	PASS
Band38	15MHz	QPSK	37825	1RB#0	19.57	PASS
Band38	15MHz	16QAM	37825	1RB#0	19.76	PASS
Band38	15MHz	QPSK	37825	1RB#38	19.78	PASS
Band38	15MHz	16QAM	37825	1RB#38	19.96	PASS
Band38	15MHz	QPSK	37825	1RB#74	19.81	PASS
Band38	15MHz	16QAM	37825	1RB#74	19.99	PASS
Band38	15MHz	QPSK	37825	38RB#0	19.72	PASS
Band38	15MHz	16QAM	37825	38RB#0	19.70	PASS

Band38	15MHz	QPSK	37825	38RB#18	19.72	PASS
Band38	15MHz	16QAM	37825	38RB#18	19.72	PASS
Band38	15MHz	QPSK	37825	38RB#37	19.70	PASS
Band38	15MHz	16QAM	37825	38RB#37	19.73	PASS
Band38	15MHz	QPSK	37825	75RB#0	19.71	PASS
Band38	15MHz	16QAM	37825	75RB#0	19.73	PASS
Band38	15MHz	QPSK	38000	1RB#0	19.95	PASS
Band38	15MHz	16QAM	38000	1RB#0	19.71	PASS
Band38	15MHz	QPSK	38000	1RB#38	19.83	PASS
Band38	15MHz	16QAM	38000	1RB#38	19.60	PASS
Band38	15MHz	QPSK	38000	1RB#74	19.86	PASS
Band38	15MHz	16QAM	38000	1RB#74	19.60	PASS
Band38	15MHz	QPSK	38000	38RB#0	19.74	PASS
Band38	15MHz	16QAM	38000	38RB#0	19.76	PASS
Band38	15MHz	QPSK	38000	38RB#18	19.73	PASS
Band38	15MHz	16QAM	38000	38RB#18	19.75	PASS
Band38	15MHz	QPSK	38000	38RB#37	19.74	PASS
Band38	15MHz	16QAM	38000	38RB#37	19.75	PASS
Band38	15MHz	QPSK	38000	75RB#0	19.75	PASS
Band38	15MHz	16QAM	38000	75RB#0	19.77	PASS
Band38	15MHz	QPSK	38175	1RB#0	20.00	PASS
Band38	15MHz	16QAM	38175	1RB#0	19.92	PASS
Band38	15MHz	QPSK	38175	1RB#38	20.07	PASS
Band38	15MHz	16QAM	38175	1RB#38	20.00	PASS
Band38	15MHz	QPSK	38175	1RB#74	20.00	PASS
Band38	15MHz	16QAM	38175	1RB#74	19.92	PASS
Band38	15MHz	QPSK	38175	38RB#0	20.02	PASS
Band38	15MHz	16QAM	38175	38RB#0	20.06	PASS
Band38	15MHz	QPSK	38175	38RB#18	20.03	PASS
Band38	15MHz	16QAM	38175	38RB#18	20.07	PASS
Band38	15MHz	QPSK	38175	38RB#37	20.03	PASS
Band38	15MHz	16QAM	38175	38RB#37	20.01	PASS
Band38	15MHz	QPSK	38175	75RB#0	20.01	PASS
Band38	15MHz	16QAM	38175	75RB#0	20.05	PASS
Band38	20MHz	QPSK	37850	1RB#0	19.61	PASS
Band38	20MHz	16QAM	37850	1RB#0	19.65	PASS
Band38	20MHz	QPSK	37850	1RB#49	19.83	PASS
Band38	20MHz	16QAM	37850	1RB#49	19.84	PASS
Band38	20MHz	QPSK	37850	1RB#99	19.83	PASS
Band38	20MHz	16QAM	37850	1RB#99	19.85	PASS
Band38	20MHz	QPSK	37850	50RB#0	19.76	PASS
Band38	20MHz	16QAM	37850	50RB#0	19.76	PASS

Band38	20MHz	QPSK	37850	50RB#25	19.73	PASS
Band38	20MHz	16QAM	37850	50RB#25	19.76	PASS
Band38	20MHz	QPSK	37850	50RB#50	19.81	PASS
Band38	20MHz	16QAM	37850	50RB#50	19.80	PASS
Band38	20MHz	QPSK	37850	100RB#0	19.75	PASS
Band38	20MHz	16QAM	37850	100RB#0	19.75	PASS
Band38	20MHz	QPSK	38000	1RB#0	19.85	PASS
Band38	20MHz	16QAM	38000	1RB#0	19.47	PASS
Band38	20MHz	QPSK	38000	1RB#49	19.70	PASS
Band38	20MHz	16QAM	38000	1RB#49	19.31	PASS
Band38	20MHz	QPSK	38000	1RB#99	19.79	PASS
Band38	20MHz	16QAM	38000	1RB#99	19.36	PASS
Band38	20MHz	QPSK	38000	50RB#0	19.81	PASS
Band38	20MHz	16QAM	38000	50RB#0	19.83	PASS
Band38	20MHz	QPSK	38000	50RB#25	19.81	PASS
Band38	20MHz	16QAM	38000	50RB#25	19.85	PASS
Band38	20MHz	QPSK	38000	50RB#50	19.75	PASS
Band38	20MHz	16QAM	38000	50RB#50	19.79	PASS
Band38	20MHz	QPSK	38000	100RB#0	19.79	PASS
Band38	20MHz	16QAM	38000	100RB#0	19.77	PASS
Band38	20MHz	QPSK	38150	1RB#0	19.94	PASS
Band38	20MHz	16QAM	38150	1RB#0	19.62	PASS
Band38	20MHz	QPSK	38150	1RB#49	20.15	PASS
Band38	20MHz	16QAM	38150	1RB#49	19.74	PASS
Band38	20MHz	QPSK	38150	1RB#99	20.03	PASS
Band38	20MHz	16QAM	38150	1RB#99	19.68	PASS
Band38	20MHz	QPSK	38150	50RB#0	19.95	PASS
Band38	20MHz	16QAM	38150	50RB#0	19.92	PASS
Band38	20MHz	QPSK	38150	50RB#25	19.97	PASS
Band38	20MHz	16QAM	38150	50RB#25	19.92	PASS
Band38	20MHz	QPSK	38150	50RB#50	20.05	PASS
Band38	20MHz	16QAM	38150	50RB#50	20.01	PASS
Band38	20MHz	QPSK	38150	100RB#0	20.00	PASS
Band38	20MHz	16QAM	38150	100RB#0	19.98	PASS

LTE(P1):

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band41	5MHz	QPSK	39675	1RB#0	21.21	PASS
Band41	5MHz	16QAM	39675	1RB#0	21.40	PASS
Band41	5MHz	QPSK	39675	1RB#12	21.18	PASS
Band41	5MHz	16QAM	39675	1RB#12	21.38	PASS

Band41	5MHz	QPSK	39675	1RB#24	21.28	PASS
Band41	5MHz	16QAM	39675	1RB#24	21.45	PASS
Band41	5MHz	QPSK	39675	12RB#0	21.14	PASS
Band41	5MHz	16QAM	39675	12RB#0	21.12	PASS
Band41	5MHz	QPSK	39675	12RB#6	21.09	PASS
Band41	5MHz	16QAM	39675	12RB#6	21.06	PASS
Band41	5MHz	QPSK	39675	12RB#13	21.11	PASS
Band41	5MHz	16QAM	39675	12RB#13	21.12	PASS
Band41	5MHz	QPSK	39675	25RB#0	21.18	PASS
Band41	5MHz	16QAM	39675	25RB#0	21.14	PASS
Band41	5MHz	QPSK	40620	1RB#0	21.13	PASS
Band41	5MHz	16QAM	40620	1RB#0	21.26	PASS
Band41	5MHz	QPSK	40620	1RB#12	21.08	PASS
Band41	5MHz	16QAM	40620	1RB#12	21.19	PASS
Band41	5MHz	QPSK	40620	1RB#24	21.09	PASS
Band41	5MHz	16QAM	40620	1RB#24	21.23	PASS
Band41	5MHz	QPSK	40620	12RB#0	21.12	PASS
Band41	5MHz	16QAM	40620	12RB#0	21.21	PASS
Band41	5MHz	QPSK	40620	12RB#6	21.15	PASS
Band41	5MHz	16QAM	40620	12RB#6	21.20	PASS
Band41	5MHz	QPSK	40620	12RB#13	21.10	PASS
Band41	5MHz	16QAM	40620	12RB#13	21.14	PASS
Band41	5MHz	QPSK	40620	25RB#0	21.14	PASS
Band41	5MHz	16QAM	40620	25RB#0	21.11	PASS
Band41	5MHz	QPSK	41565	1RB#0	21.86	PASS
Band41	5MHz	16QAM	41565	1RB#0	21.88	PASS
Band41	5MHz	QPSK	41565	1RB#12	21.80	PASS
Band41	5MHz	16QAM	41565	1RB#12	21.85	PASS
Band41	5MHz	QPSK	41565	1RB#24	21.84	PASS
Band41	5MHz	16QAM	41565	1RB#24	21.83	PASS
Band41	5MHz	QPSK	41565	12RB#0	21.84	PASS
Band41	5MHz	16QAM	41565	12RB#0	21.85	PASS
Band41	5MHz	QPSK	41565	12RB#6	21.85	PASS
Band41	5MHz	16QAM	41565	12RB#6	21.83	PASS
Band41	5MHz	QPSK	41565	12RB#13	21.83	PASS
Band41	5MHz	16QAM	41565	12RB#13	21.80	PASS
Band41	5MHz	QPSK	41565	25RB#0	21.88	PASS
Band41	5MHz	16QAM	41565	25RB#0	21.82	PASS
Band41	10MHz	QPSK	39700	1RB#0	21.24	PASS
Band41	10MHz	16QAM	39700	1RB#0	21.38	PASS
Band41	10MHz	QPSK	39700	1RB#24	21.21	PASS
Band41	10MHz	16QAM	39700	1RB#24	21.34	PASS

Band41	10MHz	QPSK	39700	1RB#49	21.40	PASS
Band41	10MHz	16QAM	39700	1RB#49	21.57	PASS
Band41	10MHz	QPSK	39700	25RB#0	21.17	PASS
Band41	10MHz	16QAM	39700	25RB#0	21.22	PASS
Band41	10MHz	QPSK	39700	25RB#12	21.18	PASS
Band41	10MHz	16QAM	39700	25RB#12	21.23	PASS
Band41	10MHz	QPSK	39700	25RB#25	21.26	PASS
Band41	10MHz	16QAM	39700	25RB#25	21.32	PASS
Band41	10MHz	QPSK	39700	50RB#0	21.22	PASS
Band41	10MHz	16QAM	39700	50RB#0	21.22	PASS
Band41	10MHz	QPSK	40620	1RB#0	21.26	PASS
Band41	10MHz	16QAM	40620	1RB#0	21.89	PASS
Band41	10MHz	QPSK	40620	1RB#24	21.12	PASS
Band41	10MHz	16QAM	40620	1RB#24	21.77	PASS
Band41	10MHz	QPSK	40620	1RB#49	21.21	PASS
Band41	10MHz	16QAM	40620	1RB#49	21.86	PASS
Band41	10MHz	QPSK	40620	25RB#0	21.14	PASS
Band41	10MHz	16QAM	40620	25RB#0	21.13	PASS
Band41	10MHz	QPSK	40620	25RB#12	21.17	PASS
Band41	10MHz	16QAM	40620	25RB#12	21.14	PASS
Band41	10MHz	QPSK	40620	25RB#25	21.09	PASS
Band41	10MHz	16QAM	40620	25RB#25	21.07	PASS
Band41	10MHz	QPSK	40620	50RB#0	21.13	PASS
Band41	10MHz	16QAM	40620	50RB#0	21.14	PASS
Band41	10MHz	QPSK	41540	1RB#0	21.94	PASS
Band41	10MHz	16QAM	41540	1RB#0	21.85	PASS
Band41	10MHz	QPSK	41540	1RB#24	21.79	PASS
Band41	10MHz	16QAM	41540	1RB#24	21.78	PASS
Band41	10MHz	QPSK	41540	1RB#49	21.90	PASS
Band41	10MHz	16QAM	41540	1RB#49	21.80	PASS
Band41	10MHz	QPSK	41540	25RB#0	21.86	PASS
Band41	10MHz	16QAM	41540	25RB#0	21.85	PASS
Band41	10MHz	QPSK	41540	25RB#12	21.87	PASS
Band41	10MHz	16QAM	41540	25RB#12	21.84	PASS
Band41	10MHz	QPSK	41540	25RB#25	21.83	PASS
Band41	10MHz	16QAM	41540	25RB#25	21.84	PASS
Band41	10MHz	QPSK	41540	50RB#0	21.82	PASS
Band41	10MHz	16QAM	41540	50RB#0	21.83	PASS
Band41	15MHz	QPSK	39725	1RB#0	21.21	PASS
Band41	15MHz	16QAM	39725	1RB#0	21.39	PASS
Band41	15MHz	QPSK	39725	1RB#38	21.34	PASS
Band41	15MHz	16QAM	39725	1RB#38	21.47	PASS

Band41	15MHz	QPSK	39725	1RB#74	21.46	PASS
Band41	15MHz	16QAM	39725	1RB#74	21.65	PASS
Band41	15MHz	QPSK	39725	38RB#0	21.29	PASS
Band41	15MHz	16QAM	39725	38RB#0	21.28	PASS
Band41	15MHz	QPSK	39725	38RB#18	21.30	PASS
Band41	15MHz	16QAM	39725	38RB#18	21.29	PASS
Band41	15MHz	QPSK	39725	38RB#37	21.28	PASS
Band41	15MHz	16QAM	39725	38RB#37	21.29	PASS
Band41	15MHz	QPSK	39725	75RB#0	21.29	PASS
Band41	15MHz	16QAM	39725	75RB#0	21.34	PASS
Band41	15MHz	QPSK	40620	1RB#0	21.39	PASS
Band41	15MHz	16QAM	40620	1RB#0	21.13	PASS
Band41	15MHz	QPSK	40620	1RB#38	21.27	PASS
Band41	15MHz	16QAM	40620	1RB#38	21.02	PASS
Band41	15MHz	QPSK	40620	1RB#74	21.23	PASS
Band41	15MHz	16QAM	40620	1RB#74	21.00	PASS
Band41	15MHz	QPSK	40620	38RB#0	21.19	PASS
Band41	15MHz	16QAM	40620	38RB#0	21.19	PASS
Band41	15MHz	QPSK	40620	38RB#18	21.18	PASS
Band41	15MHz	16QAM	40620	38RB#18	21.20	PASS
Band41	15MHz	QPSK	40620	38RB#37	21.19	PASS
Band41	15MHz	16QAM	40620	38RB#37	21.18	PASS
Band41	15MHz	QPSK	40620	75RB#0	21.18	PASS
Band41	15MHz	16QAM	40620	75RB#0	21.20	PASS
Band41	15MHz	QPSK	41515	1RB#0	21.84	PASS
Band41	15MHz	16QAM	41515	1RB#0	21.74	PASS
Band41	15MHz	QPSK	41515	1RB#38	21.88	PASS
Band41	15MHz	16QAM	41515	1RB#38	21.80	PASS
Band41	15MHz	QPSK	41515	1RB#74	21.84	PASS
Band41	15MHz	16QAM	41515	1RB#74	21.76	PASS
Band41	15MHz	QPSK	41515	38RB#0	21.86	PASS
Band41	15MHz	16QAM	41515	38RB#0	21.86	PASS
Band41	15MHz	QPSK	41515	38RB#18	21.86	PASS
Band41	15MHz	16QAM	41515	38RB#18	21.85	PASS
Band41	15MHz	QPSK	41515	38RB#37	21.85	PASS
Band41	15MHz	16QAM	41515	38RB#37	21.86	PASS
Band41	15MHz	QPSK	41515	75RB#0	21.84	PASS
Band41	15MHz	16QAM	41515	75RB#0	21.86	PASS
Band41	20MHz	QPSK	39750	1RB#0	21.13	PASS
Band41	20MHz	16QAM	39750	1RB#0	21.15	PASS
Band41	20MHz	QPSK	39750	1RB#49	21.35	PASS
Band41	20MHz	16QAM	39750	1RB#49	21.36	PASS

Band41	20MHz	QPSK	39750	1RB#99	21.49	PASS
Band41	20MHz	16QAM	39750	1RB#99	21.55	PASS
Band41	20MHz	QPSK	39750	50RB#0	21.26	PASS
Band41	20MHz	16QAM	39750	50RB#0	21.26	PASS
Band41	20MHz	QPSK	39750	50RB#25	21.26	PASS
Band41	20MHz	16QAM	39750	50RB#25	21.26	PASS
Band41	20MHz	QPSK	39750	50RB#50	21.42	PASS
Band41	20MHz	16QAM	39750	50RB#50	21.46	PASS
Band41	20MHz	QPSK	39750	100RB#0	21.38	PASS
Band41	20MHz	16QAM	39750	100RB#0	21.36	PASS
Band41	20MHz	QPSK	40620	1RB#0	21.24	PASS
Band41	20MHz	16QAM	40620	1RB#0	21.85	PASS
Band41	20MHz	QPSK	40620	1RB#49	21.11	PASS
Band41	20MHz	16QAM	40620	1RB#49	21.73	PASS
Band41	20MHz	QPSK	40620	1RB#99	21.16	PASS
Band41	20MHz	16QAM	40620	1RB#99	21.75	PASS
Band41	20MHz	QPSK	40620	50RB#0	21.22	PASS
Band41	20MHz	16QAM	40620	50RB#0	21.25	PASS
Band41	20MHz	QPSK	40620	50RB#25	21.24	PASS
Band41	20MHz	16QAM	40620	50RB#25	21.26	PASS
Band41	20MHz	QPSK	40620	50RB#50	21.18	PASS
Band41	20MHz	16QAM	40620	50RB#50	21.21	PASS
Band41	20MHz	QPSK	40620	100RB#0	21.21	PASS
Band41	20MHz	16QAM	40620	100RB#0	21.20	PASS
Band41	20MHz	QPSK	41490	1RB#0	21.80	PASS
Band41	20MHz	16QAM	41490	1RB#0	21.47	PASS
Band41	20MHz	QPSK	41490	1RB#49	22.01	PASS
Band41	20MHz	16QAM	41490	1RB#49	21.58	PASS
Band41	20MHz	QPSK	41490	1RB#99	22.45	PASS
Band41	20MHz	16QAM	41490	1RB#99	21.59	PASS
Band41	20MHz	QPSK	41490	50RB#0	21.83	PASS
Band41	20MHz	16QAM	41490	50RB#0	21.76	PASS
Band41	20MHz	QPSK	41490	50RB#25	21.83	PASS
Band41	20MHz	16QAM	41490	50RB#25	21.79	PASS
Band41	20MHz	QPSK	41490	50RB#50	21.89	PASS
Band41	20MHz	16QAM	41490	50RB#50	21.83	PASS
Band41	20MHz	QPSK	41490	100RB#0	21.83	PASS
Band41	20MHz	16QAM	41490	100RB#0	21.83	PASS

LTE(P4): Sensor ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band41	5MHz	QPSK	39675	1RB#0	20.78	PASS
Band41	5MHz	16QAM	39675	1RB#0	20.98	PASS
Band41	5MHz	QPSK	39675	1RB#12	20.78	PASS
Band41	5MHz	16QAM	39675	1RB#12	20.87	PASS
Band41	5MHz	QPSK	39675	1RB#24	20.87	PASS
Band41	5MHz	16QAM	39675	1RB#24	20.87	PASS
Band41	5MHz	QPSK	39675	12RB#0	20.13	PASS
Band41	5MHz	16QAM	39675	12RB#0	20.04	PASS
Band41	5MHz	QPSK	39675	12RB#6	20.15	PASS
Band41	5MHz	16QAM	39675	12RB#6	20.25	PASS
Band41	5MHz	QPSK	39675	12RB#13	20.28	PASS
Band41	5MHz	16QAM	39675	12RB#13	20.98	PASS
Band41	5MHz	QPSK	39675	25RB#0	20.78	PASS
Band41	5MHz	16QAM	39675	25RB#0	20.87	PASS
Band41	5MHz	QPSK	40620	1RB#0	20.98	PASS
Band41	5MHz	16QAM	40620	1RB#0	20.87	PASS
Band41	5MHz	QPSK	40620	1RB#12	20.87	PASS
Band41	5MHz	16QAM	40620	1RB#12	21.24	PASS
Band41	5MHz	QPSK	40620	1RB#24	21.11	PASS
Band41	5MHz	16QAM	40620	1RB#24	21.24	PASS
Band41	5MHz	QPSK	40620	12RB#0	21.13	PASS
Band41	5MHz	16QAM	40620	12RB#0	21.28	PASS
Band41	5MHz	QPSK	40620	12RB#6	21.13	PASS
Band41	5MHz	16QAM	40620	12RB#6	20.48	PASS
Band41	5MHz	QPSK	40620	12RB#13	21.08	PASS
Band41	5MHz	16QAM	40620	12RB#13	21.13	PASS
Band41	5MHz	QPSK	40620	25RB#0	20.54	PASS
Band41	5MHz	16QAM	40620	25RB#0	20.56	PASS
Band41	5MHz	QPSK	41565	1RB#0	21.08	PASS
Band41	5MHz	16QAM	41565	1RB#0	20.15	PASS
Band41	5MHz	QPSK	41565	1RB#12	21.25	PASS
Band41	5MHz	16QAM	41565	1RB#12	21.35	PASS
Band41	5MHz	QPSK	41565	1RB#24	21.25	PASS
Band41	5MHz	16QAM	41565	1RB#24	20.03	PASS
Band41	5MHz	QPSK	41565	12RB#0	20.45	PASS
Band41	5MHz	16QAM	41565	12RB#0	20.25	PASS
Band41	5MHz	QPSK	41565	12RB#6	20.35	PASS
Band41	5MHz	16QAM	41565	12RB#6	20.54	PASS
Band41	5MHz	QPSK	41565	12RB#13	20.54	PASS

Band41	5MHz	16QAM	41565	12RB#13	20.54	PASS
Band41	5MHz	QPSK	41565	25RB#0	20.65	PASS
Band41	5MHz	16QAM	41565	25RB#0	20.54	PASS
Band41	10MHz	QPSK	39700	1RB#0	20.58	PASS
Band41	10MHz	16QAM	39700	1RB#0	20.58	PASS
Band41	10MHz	QPSK	39700	1RB#24	20.78	PASS
Band41	10MHz	16QAM	39700	1RB#24	20.58	PASS
Band41	10MHz	QPSK	39700	1RB#49	20.65	PASS
Band41	10MHz	16QAM	39700	1RB#49	20.45	PASS
Band41	10MHz	QPSK	39700	25RB#0	20.65	PASS
Band41	10MHz	16QAM	39700	25RB#0	20.57	PASS
Band41	10MHz	QPSK	39700	25RB#12	20.58	PASS
Band41	10MHz	16QAM	39700	25RB#12	20.45	PASS
Band41	10MHz	QPSK	39700	25RB#25	20.56	PASS
Band41	10MHz	16QAM	39700	25RB#25	20.55	PASS
Band41	10MHz	QPSK	39700	50RB#0	20.65	PASS
Band41	10MHz	16QAM	39700	50RB#0	20.54	PASS
Band41	10MHz	QPSK	40620	1RB#0	20.45	PASS
Band41	10MHz	16QAM	40620	1RB#0	20.65	PASS
Band41	10MHz	QPSK	40620	1RB#24	20.54	PASS
Band41	10MHz	16QAM	40620	1RB#24	20.45	PASS
Band41	10MHz	QPSK	40620	1RB#49	20.25	PASS
Band41	10MHz	16QAM	40620	1RB#49	20.65	PASS
Band41	10MHz	QPSK	40620	25RB#0	20.45	PASS
Band41	10MHz	16QAM	40620	25RB#0	20.54	PASS
Band41	10MHz	QPSK	40620	25RB#12	20.57	PASS
Band41	10MHz	16QAM	40620	25RB#12	20.56	PASS
Band41	10MHz	QPSK	40620	25RB#25	20.57	PASS
Band41	10MHz	16QAM	40620	25RB#25	21.01	PASS
Band41	10MHz	QPSK	40620	50RB#0	21.10	PASS
Band41	10MHz	16QAM	40620	50RB#0	21.07	PASS
Band41	10MHz	QPSK	41540	1RB#0	21.10	PASS
Band41	10MHz	16QAM	41540	1RB#0	21.15	PASS
Band41	10MHz	QPSK	41540	1RB#24	21.06	PASS
Band41	10MHz	16QAM	41540	1RB#24	20.94	PASS
Band41	10MHz	QPSK	41540	1RB#49	21.10	PASS
Band41	10MHz	16QAM	41540	1RB#49	21.02	PASS
Band41	10MHz	QPSK	41540	25RB#0	20.56	PASS
Band41	10MHz	16QAM	41540	25RB#0	21.03	PASS
Band41	10MHz	QPSK	41540	25RB#12	20.55	PASS
Band41	10MHz	16QAM	41540	25RB#12	20.63	PASS
Band41	10MHz	QPSK	41540	25RB#25	20.55	PASS

Band41	10MHz	16QAM	41540	25RB#25	21.04	PASS
Band41	10MHz	QPSK	41540	50RB#0	21.06	PASS
Band41	10MHz	16QAM	41540	50RB#0	20.54	PASS
Band41	15MHz	QPSK	39725	1RB#0	20.35	PASS
Band41	15MHz	16QAM	39725	1RB#0	20.54	PASS
Band41	15MHz	QPSK	39725	1RB#38	20.65	PASS
Band41	15MHz	16QAM	39725	1RB#38	20.87	PASS
Band41	15MHz	QPSK	39725	1RB#74	20.87	PASS
Band41	15MHz	16QAM	39725	1RB#74	20.98	PASS
Band41	15MHz	QPSK	39725	38RB#0	20.78	PASS
Band41	15MHz	16QAM	39725	38RB#0	20.54	PASS
Band41	15MHz	QPSK	39725	38RB#18	20.65	PASS
Band41	15MHz	16QAM	39725	38RB#18	20.54	PASS
Band41	15MHz	QPSK	39725	38RB#37	20.65	PASS
Band41	15MHz	16QAM	39725	38RB#37	20.45	PASS
Band41	15MHz	QPSK	39725	75RB#0	20.25	PASS
Band41	15MHz	16QAM	39725	75RB#0	20.65	PASS
Band41	15MHz	QPSK	40620	1RB#0	20.45	PASS
Band41	15MHz	16QAM	40620	1RB#0	20.54	PASS
Band41	15MHz	QPSK	40620	1RB#38	20.25	PASS
Band41	15MHz	16QAM	40620	1RB#38	20.95	PASS
Band41	15MHz	QPSK	40620	1RB#74	21.17	PASS
Band41	15MHz	16QAM	40620	1RB#74	21.91	PASS
Band41	15MHz	QPSK	40620	38RB#0	21.10	PASS
Band41	15MHz	16QAM	40620	38RB#0	20.59	PASS
Band41	15MHz	QPSK	40620	38RB#18	20.65	PASS
Band41	15MHz	16QAM	40620	38RB#18	20.65	PASS
Band41	15MHz	QPSK	40620	38RB#37	20.45	PASS
Band41	15MHz	16QAM	40620	38RB#37	20.65	PASS
Band41	15MHz	QPSK	40620	75RB#0	20.53	PASS
Band41	15MHz	16QAM	40620	75RB#0	20.42	PASS
Band41	15MHz	QPSK	41515	1RB#0	20.58	PASS
Band41	15MHz	16QAM	41515	1RB#0	20.65	PASS
Band41	15MHz	QPSK	41515	1RB#38	21.05	PASS
Band41	15MHz	16QAM	41515	1RB#38	20.54	PASS
Band41	15MHz	QPSK	41515	1RB#74	20.54	PASS
Band41	15MHz	16QAM	41515	1RB#74	20.25	PASS
Band41	15MHz	QPSK	41515	38RB#0	20.35	PASS
Band41	15MHz	16QAM	41515	38RB#0	20.54	PASS
Band41	15MHz	QPSK	41515	38RB#18	20.55	PASS
Band41	15MHz	16QAM	41515	38RB#18	20.65	PASS
Band41	15MHz	QPSK	41515	38RB#37	20.45	PASS

Band41	15MHz	16QAM	41515	38RB#37	20.54	PASS
Band41	15MHz	QPSK	41515	75RB#0	20.51	PASS
Band41	15MHz	16QAM	41515	75RB#0	20.25	PASS
Band41	20MHz	QPSK	39750	1RB#0	20.65	PASS
Band41	20MHz	16QAM	39750	1RB#0	20.25	PASS
Band41	20MHz	QPSK	39750	1RB#49	20.54	PASS
Band41	20MHz	16QAM	39750	1RB#49	20.57	PASS
Band41	20MHz	QPSK	39750	1RB#99	20.45	PASS
Band41	20MHz	16QAM	39750	1RB#99	20.65	PASS
Band41	20MHz	QPSK	39750	50RB#0	20.54	PASS
Band41	20MHz	16QAM	39750	50RB#0	20.25	PASS
Band41	20MHz	QPSK	39750	50RB#25	20.65	PASS
Band41	20MHz	16QAM	39750	50RB#25	20.45	PASS
Band41	20MHz	QPSK	39750	50RB#50	20.58	PASS
Band41	20MHz	16QAM	39750	50RB#50	20.65	PASS
Band41	20MHz	QPSK	39750	100RB#0	20.78	PASS
Band41	20MHz	16QAM	39750	100RB#0	20.56	PASS
Band41	20MHz	QPSK	40620	1RB#0	20.58	PASS
Band41	20MHz	16QAM	40620	1RB#0	20.67	PASS
Band41	20MHz	QPSK	40620	1RB#49	20.54	PASS
Band41	20MHz	16QAM	40620	1RB#49	20.56	PASS
Band41	20MHz	QPSK	40620	1RB#99	20.78	PASS
Band41	20MHz	16QAM	40620	1RB#99	20.54	PASS
Band41	20MHz	QPSK	40620	50RB#0	21.03	PASS
Band41	20MHz	16QAM	40620	50RB#0	21.12	PASS
Band41	20MHz	QPSK	40620	50RB#25	20.87	PASS
Band41	20MHz	16QAM	40620	50RB#25	20.45	PASS
Band41	20MHz	QPSK	40620	50RB#50	20.32	PASS
Band41	20MHz	16QAM	40620	50RB#50	20.54	PASS
Band41	20MHz	QPSK	40620	100RB#0	20.54	PASS
Band41	20MHz	16QAM	40620	100RB#0	20.65	PASS
Band41	20MHz	QPSK	41490	1RB#0	20.45	PASS
Band41	20MHz	16QAM	41490	1RB#0	20.58	PASS
Band41	20MHz	QPSK	41490	1RB#49	21.56	PASS
Band41	20MHz	16QAM	41490	1RB#49	21.54	PASS
Band41	20MHz	QPSK	41490	1RB#99	21.65	PASS
Band41	20MHz	16QAM	41490	1RB#99	20.45	PASS
Band41	20MHz	QPSK	41490	50RB#0	21.54	PASS
Band41	20MHz	16QAM	41490	50RB#0	21.50	PASS
Band41	20MHz	QPSK	41490	50RB#25	20.92	PASS
Band41	20MHz	16QAM	41490	50RB#25	20.92	PASS
Band41	20MHz	QPSK	41490	50RB#50	20.03	PASS

Band41	20MHz	16QAM	41490	50RB#50	20.92	PASS
Band41	20MHz	QPSK	41490	100RB#0	20.05	PASS
Band41	20MHz	16QAM	41490	100RB#0	20.95	PASS

LTE(P3): Hotspot ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band41	5MHz	QPSK	39675	1RB#0	20.12	PASS
Band41	5MHz	16QAM	39675	1RB#0	20.46	PASS
Band41	5MHz	QPSK	39675	1RB#12	20.11	PASS
Band41	5MHz	16QAM	39675	1RB#12	20.45	PASS
Band41	5MHz	QPSK	39675	1RB#24	20.16	PASS
Band41	5MHz	16QAM	39675	1RB#24	20.53	PASS
Band41	5MHz	QPSK	39675	12RB#0	20.13	PASS
Band41	5MHz	16QAM	39675	12RB#0	20.04	PASS
Band41	5MHz	QPSK	39675	12RB#6	20.15	PASS
Band41	5MHz	16QAM	39675	12RB#6	20.07	PASS
Band41	5MHz	QPSK	39675	12RB#13	20.15	PASS
Band41	5MHz	16QAM	39675	12RB#13	20.10	PASS
Band41	5MHz	QPSK	39675	25RB#0	20.18	PASS
Band41	5MHz	16QAM	39675	25RB#0	20.14	PASS
Band41	5MHz	QPSK	40620	1RB#0	20.17	PASS
Band41	5MHz	16QAM	40620	1RB#0	20.29	PASS
Band41	5MHz	QPSK	40620	1RB#12	20.10	PASS
Band41	5MHz	16QAM	40620	1RB#12	20.24	PASS
Band41	5MHz	QPSK	40620	1RB#24	20.11	PASS
Band41	5MHz	16QAM	40620	1RB#24	20.24	PASS
Band41	5MHz	QPSK	40620	12RB#0	20.13	PASS
Band41	5MHz	16QAM	40620	12RB#0	20.20	PASS
Band41	5MHz	QPSK	40620	12RB#6	20.13	PASS
Band41	5MHz	16QAM	40620	12RB#6	20.18	PASS
Band41	5MHz	QPSK	40620	12RB#13	20.08	PASS
Band41	5MHz	16QAM	40620	12RB#13	20.14	PASS
Band41	5MHz	QPSK	40620	25RB#0	20.14	PASS
Band41	5MHz	16QAM	40620	25RB#0	20.09	PASS
Band41	5MHz	QPSK	41565	1RB#0	20.08	PASS
Band41	5MHz	16QAM	41565	1RB#0	20.07	PASS
Band41	5MHz	QPSK	41565	1RB#12	20.02	PASS
Band41	5MHz	16QAM	41565	1RB#12	20.01	PASS
Band41	5MHz	QPSK	41565	1RB#24	20.06	PASS
Band41	5MHz	16QAM	41565	1RB#24	20.03	PASS
Band41	5MHz	QPSK	41565	12RB#0	20.05	PASS

Band41	5MHz	16QAM	41565	12RB#0	20.98	PASS
Band41	5MHz	QPSK	41565	12RB#6	20.06	PASS
Band41	5MHz	16QAM	41565	12RB#6	20.97	PASS
Band41	5MHz	QPSK	41565	12RB#13	20.00	PASS
Band41	5MHz	16QAM	41565	12RB#13	20.94	PASS
Band41	5MHz	QPSK	41565	25RB#0	20.03	PASS
Band41	5MHz	16QAM	41565	25RB#0	20.95	PASS
Band41	10MHz	QPSK	39700	1RB#0	20.23	PASS
Band41	10MHz	16QAM	39700	1RB#0	20.43	PASS
Band41	10MHz	QPSK	39700	1RB#24	20.21	PASS
Band41	10MHz	16QAM	39700	1RB#24	20.38	PASS
Band41	10MHz	QPSK	39700	1RB#49	20.36	PASS
Band41	10MHz	16QAM	39700	1RB#49	20.56	PASS
Band41	10MHz	QPSK	39700	25RB#0	20.19	PASS
Band41	10MHz	16QAM	39700	25RB#0	20.21	PASS
Band41	10MHz	QPSK	39700	25RB#12	20.21	PASS
Band41	10MHz	16QAM	39700	25RB#12	20.21	PASS
Band41	10MHz	QPSK	39700	25RB#25	20.28	PASS
Band41	10MHz	16QAM	39700	25RB#25	20.33	PASS
Band41	10MHz	QPSK	39700	50RB#0	20.25	PASS
Band41	10MHz	16QAM	39700	50RB#0	20.21	PASS
Band41	10MHz	QPSK	40620	1RB#0	20.26	PASS
Band41	10MHz	16QAM	40620	1RB#0	20.86	PASS
Band41	10MHz	QPSK	40620	1RB#24	20.12	PASS
Band41	10MHz	16QAM	40620	1RB#24	20.74	PASS
Band41	10MHz	QPSK	40620	1RB#49	20.19	PASS
Band41	10MHz	16QAM	40620	1RB#49	20.78	PASS
Band41	10MHz	QPSK	40620	25RB#0	20.11	PASS
Band41	10MHz	16QAM	40620	25RB#0	20.06	PASS
Band41	10MHz	QPSK	40620	25RB#12	20.10	PASS
Band41	10MHz	16QAM	40620	25RB#12	20.06	PASS
Band41	10MHz	QPSK	40620	25RB#25	20.07	PASS
Band41	10MHz	16QAM	40620	25RB#25	20.01	PASS
Band41	10MHz	QPSK	40620	50RB#0	20.10	PASS
Band41	10MHz	16QAM	40620	50RB#0	20.07	PASS
Band41	10MHz	QPSK	41540	1RB#0	20.10	PASS
Band41	10MHz	16QAM	41540	1RB#0	20.05	PASS
Band41	10MHz	QPSK	41540	1RB#24	20.06	PASS
Band41	10MHz	16QAM	41540	1RB#24	20.94	PASS
Band41	10MHz	QPSK	41540	1RB#49	20.10	PASS
Band41	10MHz	16QAM	41540	1RB#49	20.02	PASS
Band41	10MHz	QPSK	41540	25RB#0	20.06	PASS

Band41	10MHz	16QAM	41540	25RB#0	20.03	PASS
Band41	10MHz	QPSK	41540	25RB#12	20.05	PASS
Band41	10MHz	16QAM	41540	25RB#12	20.03	PASS
Band41	10MHz	QPSK	41540	25RB#25	20.05	PASS
Band41	10MHz	16QAM	41540	25RB#25	20.04	PASS
Band41	10MHz	QPSK	41540	50RB#0	20.06	PASS
Band41	10MHz	16QAM	41540	50RB#0	20.00	PASS
Band41	15MHz	QPSK	39725	1RB#0	20.16	PASS
Band41	15MHz	16QAM	39725	1RB#0	20.32	PASS
Band41	15MHz	QPSK	39725	1RB#38	20.24	PASS
Band41	15MHz	16QAM	39725	1RB#38	20.41	PASS
Band41	15MHz	QPSK	39725	1RB#74	20.42	PASS
Band41	15MHz	16QAM	39725	1RB#74	20.61	PASS
Band41	15MHz	QPSK	39725	38RB#0	20.25	PASS
Band41	15MHz	16QAM	39725	38RB#0	20.23	PASS
Band41	15MHz	QPSK	39725	38RB#18	20.24	PASS
Band41	15MHz	16QAM	39725	38RB#18	20.22	PASS
Band41	15MHz	QPSK	39725	38RB#37	20.23	PASS
Band41	15MHz	16QAM	39725	38RB#37	20.23	PASS
Band41	15MHz	QPSK	39725	75RB#0	20.21	PASS
Band41	15MHz	16QAM	39725	75RB#0	20.27	PASS
Band41	15MHz	QPSK	40620	1RB#0	20.30	PASS
Band41	15MHz	16QAM	40620	1RB#0	20.00	PASS
Band41	15MHz	QPSK	40620	1RB#38	20.18	PASS
Band41	15MHz	16QAM	40620	1RB#38	20.96	PASS
Band41	15MHz	QPSK	40620	1RB#74	20.17	PASS
Band41	15MHz	16QAM	40620	1RB#74	20.96	PASS
Band41	15MHz	QPSK	40620	38RB#0	20.10	PASS
Band41	15MHz	16QAM	40620	38RB#0	20.09	PASS
Band41	15MHz	QPSK	40620	38RB#18	20.09	PASS
Band41	15MHz	16QAM	40620	38RB#18	20.10	PASS
Band41	15MHz	QPSK	40620	38RB#37	20.12	PASS
Band41	15MHz	16QAM	40620	38RB#37	20.12	PASS
Band41	15MHz	QPSK	40620	75RB#0	20.10	PASS
Band41	15MHz	16QAM	40620	75RB#0	20.11	PASS
Band41	15MHz	QPSK	41515	1RB#0	20.00	PASS
Band41	15MHz	16QAM	41515	1RB#0	20.94	PASS
Band41	15MHz	QPSK	41515	1RB#38	20.08	PASS
Band41	15MHz	16QAM	41515	1RB#38	20.02	PASS
Band41	15MHz	QPSK	41515	1RB#74	20.03	PASS
Band41	15MHz	16QAM	41515	1RB#74	20.97	PASS
Band41	15MHz	QPSK	41515	38RB#0	20.01	PASS

Band41	15MHz	16QAM	41515	38RB#0	20.02	PASS
Band41	15MHz	QPSK	41515	38RB#18	20.01	PASS
Band41	15MHz	16QAM	41515	38RB#18	20.01	PASS
Band41	15MHz	QPSK	41515	38RB#37	20.02	PASS
Band41	15MHz	16QAM	41515	38RB#37	20.01	PASS
Band41	15MHz	QPSK	41515	75RB#0	20.02	PASS
Band41	15MHz	16QAM	41515	75RB#0	20.01	PASS
Band41	20MHz	QPSK	39750	1RB#0	20.20	PASS
Band41	20MHz	16QAM	39750	1RB#0	20.24	PASS
Band41	20MHz	QPSK	39750	1RB#49	20.34	PASS
Band41	20MHz	16QAM	39750	1RB#49	20.39	PASS
Band41	20MHz	QPSK	39750	1RB#99	20.51	PASS
Band41	20MHz	16QAM	39750	1RB#99	20.51	PASS
Band41	20MHz	QPSK	39750	50RB#0	20.22	PASS
Band41	20MHz	16QAM	39750	50RB#0	20.22	PASS
Band41	20MHz	QPSK	39750	50RB#25	20.20	PASS
Band41	20MHz	16QAM	39750	50RB#25	20.24	PASS
Band41	20MHz	QPSK	39750	50RB#50	20.44	PASS
Band41	20MHz	16QAM	39750	50RB#50	20.41	PASS
Band41	20MHz	QPSK	39750	100RB#0	20.32	PASS
Band41	20MHz	16QAM	39750	100RB#0	20.29	PASS
Band41	20MHz	QPSK	40620	1RB#0	20.22	PASS
Band41	20MHz	16QAM	40620	1RB#0	20.78	PASS
Band41	20MHz	QPSK	40620	1RB#49	20.08	PASS
Band41	20MHz	16QAM	40620	1RB#49	20.69	PASS
Band41	20MHz	QPSK	40620	1RB#99	20.12	PASS
Band41	20MHz	16QAM	40620	1RB#99	20.70	PASS
Band41	20MHz	QPSK	40620	50RB#0	20.13	PASS
Band41	20MHz	16QAM	40620	50RB#0	20.16	PASS
Band41	20MHz	QPSK	40620	50RB#25	20.14	PASS
Band41	20MHz	16QAM	40620	50RB#25	20.20	PASS
Band41	20MHz	QPSK	40620	50RB#50	20.09	PASS
Band41	20MHz	16QAM	40620	50RB#50	20.12	PASS
Band41	20MHz	QPSK	40620	100RB#0	20.11	PASS
Band41	20MHz	16QAM	40620	100RB#0	20.08	PASS
Band41	20MHz	QPSK	41490	1RB#0	20.87	PASS
Band41	20MHz	16QAM	41490	1RB#0	20.53	PASS
Band41	20MHz	QPSK	41490	1RB#49	20.10	PASS
Band41	20MHz	16QAM	41490	1RB#49	20.70	PASS
Band41	20MHz	QPSK	41490	1RB#99	20.10	PASS
Band41	20MHz	16QAM	41490	1RB#99	20.74	PASS
Band41	20MHz	QPSK	41490	50RB#0	20.94	PASS

Band41	20MHz	16QAM	41490	50RB#0	20.90	PASS
Band41	20MHz	QPSK	41490	50RB#25	20.99	PASS
Band41	20MHz	16QAM	41490	50RB#25	20.90	PASS
Band41	20MHz	QPSK	41490	50RB#50	20.04	PASS
Band41	20MHz	16QAM	41490	50RB#50	20.97	PASS
Band41	20MHz	QPSK	41490	100RB#0	20.00	PASS
Band41	20MHz	16QAM	41490	100RB#0	20.97	PASS

LTE(P1):

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band66	1.4MHz	QPSK	131979	1RB#0	22.87	PASS
Band66	1.4MHz	16QAM	131979	1RB#0	21.83	PASS
Band66	1.4MHz	QPSK	131979	1RB#2	22.87	PASS
Band66	1.4MHz	16QAM	131979	1RB#2	21.87	PASS
Band66	1.4MHz	QPSK	131979	1RB#5	22.87	PASS
Band66	1.4MHz	16QAM	131979	1RB#5	21.84	PASS
Band66	1.4MHz	QPSK	131979	3RB#0	22.86	PASS
Band66	1.4MHz	16QAM	131979	3RB#0	21.70	PASS
Band66	1.4MHz	QPSK	131979	3RB#1	22.90	PASS
Band66	1.4MHz	16QAM	131979	3RB#1	21.81	PASS
Band66	1.4MHz	QPSK	131979	3RB#3	22.87	PASS
Band66	1.4MHz	16QAM	131979	3RB#3	21.75	PASS
Band66	1.4MHz	QPSK	131979	6RB#0	21.93	PASS
Band66	1.4MHz	16QAM	131979	6RB#0	21.01	PASS
Band66	1.4MHz	QPSK	132322	1RB#0	22.84	PASS
Band66	1.4MHz	16QAM	132322	1RB#0	21.69	PASS
Band66	1.4MHz	QPSK	132322	1RB#2	22.78	PASS
Band66	1.4MHz	16QAM	132322	1RB#2	21.71	PASS
Band66	1.4MHz	QPSK	132322	1RB#5	22.79	PASS
Band66	1.4MHz	16QAM	132322	1RB#5	21.66	PASS
Band66	1.4MHz	QPSK	132322	3RB#0	22.87	PASS
Band66	1.4MHz	16QAM	132322	3RB#0	21.66	PASS
Band66	1.4MHz	QPSK	132322	3RB#1	22.81	PASS
Band66	1.4MHz	16QAM	132322	3RB#1	21.66	PASS
Band66	1.4MHz	QPSK	132322	3RB#3	22.80	PASS
Band66	1.4MHz	16QAM	132322	3RB#3	21.65	PASS
Band66	1.4MHz	QPSK	132322	6RB#0	21.80	PASS
Band66	1.4MHz	16QAM	132322	6RB#0	20.69	PASS
Band66	1.4MHz	QPSK	132665	1RB#0	22.56	PASS
Band66	1.4MHz	16QAM	132665	1RB#0	21.43	PASS
Band66	1.4MHz	QPSK	132665	1RB#2	22.51	PASS

Band66	1.4MHz	16QAM	132665	1RB#2	21.39	PASS
Band66	1.4MHz	QPSK	132665	1RB#5	22.56	PASS
Band66	1.4MHz	16QAM	132665	1RB#5	21.42	PASS
Band66	1.4MHz	QPSK	132665	3RB#0	22.61	PASS
Band66	1.4MHz	16QAM	132665	3RB#0	21.42	PASS
Band66	1.4MHz	QPSK	132665	3RB#1	22.62	PASS
Band66	1.4MHz	16QAM	132665	3RB#1	21.36	PASS
Band66	1.4MHz	QPSK	132665	3RB#3	22.58	PASS
Band66	1.4MHz	16QAM	132665	3RB#3	21.37	PASS
Band66	1.4MHz	QPSK	132665	6RB#0	21.54	PASS
Band66	1.4MHz	16QAM	132665	6RB#0	20.52	PASS
Band66	3MHz	QPSK	131987	1RB#0	23.03	PASS
Band66	3MHz	16QAM	131987	1RB#0	21.99	PASS
Band66	3MHz	QPSK	131987	1RB#8	22.92	PASS
Band66	3MHz	16QAM	131987	1RB#8	21.84	PASS
Band66	3MHz	QPSK	131987	1RB#14	22.86	PASS
Band66	3MHz	16QAM	131987	1RB#14	21.84	PASS
Band66	3MHz	QPSK	131987	8RB#0	21.90	PASS
Band66	3MHz	16QAM	131987	8RB#0	20.98	PASS
Band66	3MHz	QPSK	131987	8RB#4	21.92	PASS
Band66	3MHz	16QAM	131987	8RB#4	20.99	PASS
Band66	3MHz	QPSK	131987	8RB#7	21.91	PASS
Band66	3MHz	16QAM	131987	8RB#7	20.98	PASS
Band66	3MHz	QPSK	131987	15RB#0	21.89	PASS
Band66	3MHz	16QAM	131987	15RB#0	20.96	PASS
Band66	3MHz	QPSK	132322	1RB#0	22.87	PASS
Band66	3MHz	16QAM	132322	1RB#0	21.84	PASS
Band66	3MHz	QPSK	132322	1RB#8	22.81	PASS
Band66	3MHz	16QAM	132322	1RB#8	21.80	PASS
Band66	3MHz	QPSK	132322	1RB#14	22.81	PASS
Band66	3MHz	16QAM	132322	1RB#14	21.77	PASS
Band66	3MHz	QPSK	132322	8RB#0	21.81	PASS
Band66	3MHz	16QAM	132322	8RB#0	20.88	PASS
Band66	3MHz	QPSK	132322	8RB#4	21.79	PASS
Band66	3MHz	16QAM	132322	8RB#4	20.90	PASS
Band66	3MHz	QPSK	132322	8RB#7	21.74	PASS
Band66	3MHz	16QAM	132322	8RB#7	20.87	PASS
Band66	3MHz	QPSK	132322	15RB#0	21.77	PASS
Band66	3MHz	16QAM	132322	15RB#0	20.86	PASS
Band66	3MHz	QPSK	132657	1RB#0	22.59	PASS
Band66	3MHz	16QAM	132657	1RB#0	21.57	PASS
Band66	3MHz	QPSK	132657	1RB#8	22.54	PASS

Band66	3MHz	16QAM	132657	1RB#8	21.49	PASS
Band66	3MHz	QPSK	132657	1RB#14	22.54	PASS
Band66	3MHz	16QAM	132657	1RB#14	21.51	PASS
Band66	3MHz	QPSK	132657	8RB#0	21.58	PASS
Band66	3MHz	16QAM	132657	8RB#0	20.74	PASS
Band66	3MHz	QPSK	132657	8RB#4	21.56	PASS
Band66	3MHz	16QAM	132657	8RB#4	20.72	PASS
Band66	3MHz	QPSK	132657	8RB#7	21.52	PASS
Band66	3MHz	16QAM	132657	8RB#7	20.68	PASS
Band66	3MHz	QPSK	132657	15RB#0	21.52	PASS
Band66	3MHz	16QAM	132657	15RB#0	20.68	PASS
Band66	5MHz	QPSK	131997	1RB#0	23.20	PASS
Band66	5MHz	16QAM	131997	1RB#0	22.04	PASS
Band66	5MHz	QPSK	131997	1RB#12	23.09	PASS
Band66	5MHz	16QAM	131997	1RB#12	21.93	PASS
Band66	5MHz	QPSK	131997	1RB#24	23.12	PASS
Band66	5MHz	16QAM	131997	1RB#24	21.91	PASS
Band66	5MHz	QPSK	131997	12RB#0	21.96	PASS
Band66	5MHz	16QAM	131997	12RB#0	21.03	PASS
Band66	5MHz	QPSK	131997	12RB#6	21.96	PASS
Band66	5MHz	16QAM	131997	12RB#6	21.04	PASS
Band66	5MHz	QPSK	131997	12RB#13	21.91	PASS
Band66	5MHz	16QAM	131997	12RB#13	20.97	PASS
Band66	5MHz	QPSK	131997	25RB#0	22.00	PASS
Band66	5MHz	16QAM	131997	25RB#0	21.03	PASS
Band66	5MHz	QPSK	132322	1RB#0	23.13	PASS
Band66	5MHz	16QAM	132322	1RB#0	21.95	PASS
Band66	5MHz	QPSK	132322	1RB#12	23.00	PASS
Band66	5MHz	16QAM	132322	1RB#12	21.83	PASS
Band66	5MHz	QPSK	132322	1RB#24	23.06	PASS
Band66	5MHz	16QAM	132322	1RB#24	21.83	PASS
Band66	5MHz	QPSK	132322	12RB#0	21.90	PASS
Band66	5MHz	16QAM	132322	12RB#0	20.94	PASS
Band66	5MHz	QPSK	132322	12RB#6	21.87	PASS
Band66	5MHz	16QAM	132322	12RB#6	20.94	PASS
Band66	5MHz	QPSK	132322	12RB#13	21.80	PASS
Band66	5MHz	16QAM	132322	12RB#13	20.87	PASS
Band66	5MHz	QPSK	132322	25RB#0	21.87	PASS
Band66	5MHz	16QAM	132322	25RB#0	20.92	PASS
Band66	5MHz	QPSK	132647	1RB#0	22.79	PASS
Band66	5MHz	16QAM	132647	1RB#0	21.62	PASS
Band66	5MHz	QPSK	132647	1RB#12	22.73	PASS

Band66	5MHz	16QAM	132647	1RB#12	21.54	PASS
Band66	5MHz	QPSK	132647	1RB#24	22.72	PASS
Band66	5MHz	16QAM	132647	1RB#24	21.54	PASS
Band66	5MHz	QPSK	132647	12RB#0	21.63	PASS
Band66	5MHz	16QAM	132647	12RB#0	20.76	PASS
Band66	5MHz	QPSK	132647	12RB#6	21.62	PASS
Band66	5MHz	16QAM	132647	12RB#6	20.76	PASS
Band66	5MHz	QPSK	132647	12RB#13	21.56	PASS
Band66	5MHz	16QAM	132647	12RB#13	20.68	PASS
Band66	5MHz	QPSK	132647	25RB#0	21.63	PASS
Band66	5MHz	16QAM	132647	25RB#0	20.75	PASS
Band66	10MHz	QPSK	132022	1RB#0	23.09	PASS
Band66	10MHz	16QAM	132022	1RB#0	22.14	PASS
Band66	10MHz	QPSK	132022	1RB#24	22.98	PASS
Band66	10MHz	16QAM	132022	1RB#24	21.95	PASS
Band66	10MHz	QPSK	132022	1RB#49	22.98	PASS
Band66	10MHz	16QAM	132022	1RB#49	21.97	PASS
Band66	10MHz	QPSK	132022	25RB#0	22.06	PASS
Band66	10MHz	16QAM	132022	25RB#0	21.02	PASS
Band66	10MHz	QPSK	132022	25RB#12	22.05	PASS
Band66	10MHz	16QAM	132022	25RB#12	21.01	PASS
Band66	10MHz	QPSK	132022	25RB#25	21.96	PASS
Band66	10MHz	16QAM	132022	25RB#25	20.96	PASS
Band66	10MHz	QPSK	132022	50RB#0	22.00	PASS
Band66	10MHz	16QAM	132022	50RB#0	21.01	PASS
Band66	10MHz	QPSK	132322	1RB#0	23.07	PASS
Band66	10MHz	16QAM	132322	1RB#0	21.93	PASS
Band66	10MHz	QPSK	132322	1RB#24	22.95	PASS
Band66	10MHz	16QAM	132322	1RB#24	21.93	PASS
Band66	10MHz	QPSK	132322	1RB#49	22.87	PASS
Band66	10MHz	16QAM	132322	1RB#49	21.80	PASS
Band66	10MHz	QPSK	132322	25RB#0	21.96	PASS
Band66	10MHz	16QAM	132322	25RB#0	20.95	PASS
Band66	10MHz	QPSK	132322	25RB#12	21.94	PASS
Band66	10MHz	16QAM	132322	25RB#12	20.94	PASS
Band66	10MHz	QPSK	132322	25RB#25	21.84	PASS
Band66	10MHz	16QAM	132322	25RB#25	20.82	PASS
Band66	10MHz	QPSK	132322	50RB#0	21.88	PASS
Band66	10MHz	16QAM	132322	50RB#0	20.91	PASS
Band66	10MHz	QPSK	132622	1RB#0	22.67	PASS
Band66	10MHz	16QAM	132622	1RB#0	21.62	PASS
Band66	10MHz	QPSK	132622	1RB#24	22.57	PASS

Band66	10MHz	16QAM	132622	1RB#24	21.50	PASS
Band66	10MHz	QPSK	132622	1RB#49	22.52	PASS
Band66	10MHz	16QAM	132622	1RB#49	21.56	PASS
Band66	10MHz	QPSK	132622	25RB#0	21.66	PASS
Band66	10MHz	16QAM	132622	25RB#0	20.72	PASS
Band66	10MHz	QPSK	132622	25RB#12	21.68	PASS
Band66	10MHz	16QAM	132622	25RB#12	20.69	PASS
Band66	10MHz	QPSK	132622	25RB#25	21.57	PASS
Band66	10MHz	16QAM	132622	25RB#25	20.61	PASS
Band66	10MHz	QPSK	132622	50RB#0	21.60	PASS
Band66	10MHz	16QAM	132622	50RB#0	20.65	PASS
Band66	15MHz	QPSK	132047	1RB#0	23.14	PASS
Band66	15MHz	16QAM	132047	1RB#0	22.15	PASS
Band66	15MHz	QPSK	132047	1RB#38	22.97	PASS
Band66	15MHz	16QAM	132047	1RB#38	22.03	PASS
Band66	15MHz	QPSK	132047	1RB#74	22.94	PASS
Band66	15MHz	16QAM	132047	1RB#74	21.90	PASS
Band66	15MHz	QPSK	132047	38RB#0	21.98	PASS
Band66	15MHz	16QAM	132047	38RB#0	21.97	PASS
Band66	15MHz	QPSK	132047	38RB#18	21.97	PASS
Band66	15MHz	16QAM	132047	38RB#18	21.98	PASS
Band66	15MHz	QPSK	132047	38RB#37	21.99	PASS
Band66	15MHz	16QAM	132047	38RB#37	21.99	PASS
Band66	15MHz	QPSK	132047	75RB#0	21.98	PASS
Band66	15MHz	16QAM	132047	75RB#0	21.01	PASS
Band66	15MHz	QPSK	132322	1RB#0	22.98	PASS
Band66	15MHz	16QAM	132322	1RB#0	22.01	PASS
Band66	15MHz	QPSK	132322	1RB#38	22.90	PASS
Band66	15MHz	16QAM	132322	1RB#38	21.87	PASS
Band66	15MHz	QPSK	132322	1RB#74	22.80	PASS
Band66	15MHz	16QAM	132322	1RB#74	21.72	PASS
Band66	15MHz	QPSK	132322	38RB#0	21.89	PASS
Band66	15MHz	16QAM	132322	38RB#0	21.87	PASS
Band66	15MHz	QPSK	132322	38RB#18	21.86	PASS
Band66	15MHz	16QAM	132322	38RB#18	21.86	PASS
Band66	15MHz	QPSK	132322	38RB#37	21.87	PASS
Band66	15MHz	16QAM	132322	38RB#37	21.86	PASS
Band66	15MHz	QPSK	132322	75RB#0	21.87	PASS
Band66	15MHz	16QAM	132322	75RB#0	20.87	PASS
Band66	15MHz	QPSK	132597	1RB#0	22.67	PASS
Band66	15MHz	16QAM	132597	1RB#0	21.54	PASS
Band66	15MHz	QPSK	132597	1RB#38	22.59	PASS

Band66	15MHz	16QAM	132597	1RB#38	21.65	PASS
Band66	15MHz	QPSK	132597	1RB#74	22.46	PASS
Band66	15MHz	16QAM	132597	1RB#74	21.45	PASS
Band66	15MHz	QPSK	132597	38RB#0	21.57	PASS
Band66	15MHz	16QAM	132597	38RB#0	21.56	PASS
Band66	15MHz	QPSK	132597	38RB#18	21.55	PASS
Band66	15MHz	16QAM	132597	38RB#18	21.58	PASS
Band66	15MHz	QPSK	132597	38RB#37	21.57	PASS
Band66	15MHz	16QAM	132597	38RB#37	21.56	PASS
Band66	15MHz	QPSK	132597	75RB#0	21.56	PASS
Band66	15MHz	16QAM	132597	75RB#0	20.59	PASS
Band66	20MHz	QPSK	132072	1RB#0	23.25	PASS
Band66	20MHz	16QAM	132072	1RB#0	22.06	PASS
Band66	20MHz	QPSK	132072	1RB#49	23.02	PASS
Band66	20MHz	16QAM	132072	1RB#49	21.93	PASS
Band66	20MHz	QPSK	132072	1RB#99	23.04	PASS
Band66	20MHz	16QAM	132072	1RB#99	21.79	PASS
Band66	20MHz	QPSK	132072	50RB#0	22.03	PASS
Band66	20MHz	16QAM	132072	50RB#0	21.04	PASS
Band66	20MHz	QPSK	132072	50RB#25	22.03	PASS
Band66	20MHz	16QAM	132072	50RB#25	21.05	PASS
Band66	20MHz	QPSK	132072	50RB#50	22.01	PASS
Band66	20MHz	16QAM	132072	50RB#50	21.02	PASS
Band66	20MHz	QPSK	132072	100RB#0	22.04	PASS
Band66	20MHz	16QAM	132072	100RB#0	21.02	PASS
Band66	20MHz	QPSK	132322	1RB#0	23.02	PASS
Band66	20MHz	16QAM	132322	1RB#0	21.91	PASS
Band66	20MHz	QPSK	132322	1RB#49	23.03	PASS
Band66	20MHz	16QAM	132322	1RB#49	21.85	PASS
Band66	20MHz	QPSK	132322	1RB#99	22.81	PASS
Band66	20MHz	16QAM	132322	1RB#99	21.68	PASS
Band66	20MHz	QPSK	132322	50RB#0	21.98	PASS
Band66	20MHz	16QAM	132322	50RB#0	21.01	PASS
Band66	20MHz	QPSK	132322	50RB#25	22.00	PASS
Band66	20MHz	16QAM	132322	50RB#25	21.01	PASS
Band66	20MHz	QPSK	132322	50RB#50	21.83	PASS
Band66	20MHz	16QAM	132322	50RB#50	20.88	PASS
Band66	20MHz	QPSK	132322	100RB#0	21.92	PASS
Band66	20MHz	16QAM	132322	100RB#0	20.92	PASS
Band66	20MHz	QPSK	132572	1RB#0	22.67	PASS
Band66	20MHz	16QAM	132572	1RB#0	21.48	PASS
Band66	20MHz	QPSK	132572	1RB#49	22.59	PASS

Band66	20MHz	16QAM	132572	1RB#49	21.52	PASS
Band66	20MHz	QPSK	132572	1RB#99	22.50	PASS
Band66	20MHz	16QAM	132572	1RB#99	21.36	PASS
Band66	20MHz	QPSK	132572	50RB#0	21.59	PASS
Band66	20MHz	16QAM	132572	50RB#0	20.66	PASS
Band66	20MHz	QPSK	132572	50RB#25	21.59	PASS
Band66	20MHz	16QAM	132572	50RB#25	20.64	PASS
Band66	20MHz	QPSK	132572	50RB#50	21.49	PASS
Band66	20MHz	16QAM	132572	50RB#50	20.55	PASS
Band66	20MHz	QPSK	132572	100RB#0	21.52	PASS
Band66	20MHz	16QAM	132572	100RB#0	20.56	PASS

LTE(P4): Sensor ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band66	1.4MHz	QPSK	131979	1RB#0	19.87	PASS
Band66	1.4MHz	16QAM	131979	1RB#0	19.45	PASS
Band66	1.4MHz	QPSK	131979	1RB#2	19.25	PASS
Band66	1.4MHz	16QAM	131979	1RB#2	19.65	PASS
Band66	1.4MHz	QPSK	131979	1RB#5	19.25	PASS
Band66	1.4MHz	16QAM	131979	1RB#5	19.45	PASS
Band66	1.4MHz	QPSK	131979	3RB#0	19.36	PASS
Band66	1.4MHz	16QAM	131979	3RB#0	19.54	PASS
Band66	1.4MHz	QPSK	131979	3RB#1	19.45	PASS
Band66	1.4MHz	16QAM	131979	3RB#1	19.65	PASS
Band66	1.4MHz	QPSK	131979	3RB#3	19.54	PASS
Band66	1.4MHz	16QAM	131979	3RB#3	19.56	PASS
Band66	1.4MHz	QPSK	131979	6RB#0	19.57	PASS
Band66	1.4MHz	16QAM	131979	6RB#0	19.56	PASS
Band66	1.4MHz	QPSK	132322	1RB#0	19.75	PASS
Band66	1.4MHz	16QAM	132322	1RB#0	19.65	PASS
Band66	1.4MHz	QPSK	132322	1RB#2	19.54	PASS
Band66	1.4MHz	16QAM	132322	1RB#2	19.54	PASS
Band66	1.4MHz	QPSK	132322	1RB#5	19.65	PASS
Band66	1.4MHz	16QAM	132322	1RB#5	19.56	PASS
Band66	1.4MHz	QPSK	132322	3RB#0	19.54	PASS
Band66	1.4MHz	16QAM	132322	3RB#0	19.25	PASS
Band66	1.4MHz	QPSK	132322	3RB#1	19.65	PASS
Band66	1.4MHz	16QAM	132322	3RB#1	19.45	PASS
Band66	1.4MHz	QPSK	132322	3RB#3	19.76	PASS
Band66	1.4MHz	16QAM	132322	3RB#3	19.75	PASS

Band66	1.4MHz	QPSK	132322	6RB#0	19.54	PASS
Band66	1.4MHz	16QAM	132322	6RB#0	19.65	PASS
Band66	1.4MHz	QPSK	132665	1RB#0	19.45	PASS
Band66	1.4MHz	16QAM	132665	1RB#0	19.68	PASS
Band66	1.4MHz	QPSK	132665	1RB#2	19.74	PASS
Band66	1.4MHz	16QAM	132665	1RB#2	19.46	PASS
Band66	1.4MHz	QPSK	132665	1RB#5	19.68	PASS
Band66	1.4MHz	16QAM	132665	1RB#5	19.45	PASS
Band66	1.4MHz	QPSK	132665	3RB#0	19.35	PASS
Band66	1.4MHz	16QAM	132665	3RB#0	19.54	PASS
Band66	1.4MHz	QPSK	132665	3RB#1	19.28	PASS
Band66	1.4MHz	16QAM	132665	3RB#1	19.45	PASS
Band66	1.4MHz	QPSK	132665	3RB#3	19.36	PASS
Band66	1.4MHz	16QAM	132665	3RB#3	19.57	PASS
Band66	1.4MHz	QPSK	132665	6RB#0	19.45	PASS
Band66	1.4MHz	16QAM	132665	6RB#0	19.65	PASS
Band66	3MHz	QPSK	131987	1RB#0	19.78	PASS
Band66	3MHz	16QAM	131987	1RB#0	19.58	PASS
Band66	3MHz	QPSK	131987	1RB#8	19.45	PASS
Band66	3MHz	16QAM	131987	1RB#8	19.65	PASS
Band66	3MHz	QPSK	131987	1RB#14	19.71	PASS
Band66	3MHz	16QAM	131987	1RB#14	19.45	PASS
Band66	3MHz	QPSK	131987	8RB#0	19.65	PASS
Band66	3MHz	16QAM	131987	8RB#0	19.54	PASS
Band66	3MHz	QPSK	131987	8RB#4	19.74	PASS
Band66	3MHz	16QAM	131987	8RB#4	19.56	PASS
Band66	3MHz	QPSK	131987	8RB#7	19.54	PASS
Band66	3MHz	16QAM	131987	8RB#7	19.46	PASS
Band66	3MHz	QPSK	131987	15RB#0	19.57	PASS
Band66	3MHz	16QAM	131987	15RB#0	19.54	PASS
Band66	3MHz	QPSK	132322	1RB#0	19.65	PASS
Band66	3MHz	16QAM	132322	1RB#0	19.54	PASS
Band66	3MHz	QPSK	132322	1RB#8	19.56	PASS
Band66	3MHz	16QAM	132322	1RB#8	19.25	PASS
Band66	3MHz	QPSK	132322	1RB#14	19.74	PASS
Band66	3MHz	16QAM	132322	1RB#14	19.56	PASS
Band66	3MHz	QPSK	132322	8RB#0	19.54	PASS
Band66	3MHz	16QAM	132322	8RB#0	19.54	PASS
Band66	3MHz	QPSK	132322	8RB#4	19.45	PASS
Band66	3MHz	16QAM	132322	8RB#4	19.65	PASS
Band66	3MHz	QPSK	132322	8RB#7	19.54	PASS
Band66	3MHz	16QAM	132322	8RB#7	19.74	PASS

Band66	3MHz	QPSK	132322	15RB#0	19.56	PASS
Band66	3MHz	16QAM	132322	15RB#0	19.54	PASS
Band66	3MHz	QPSK	132657	1RB#0	19.74	PASS
Band66	3MHz	16QAM	132657	1RB#0	19.56	PASS
Band66	3MHz	QPSK	132657	1RB#8	19.74	PASS
Band66	3MHz	16QAM	132657	1RB#8	19.56	PASS
Band66	3MHz	QPSK	132657	1RB#14	19.57	PASS
Band66	3MHz	16QAM	132657	1RB#14	19.56	PASS
Band66	3MHz	QPSK	132657	8RB#0	19.57	PASS
Band66	3MHz	16QAM	132657	8RB#0	19.57	PASS
Band66	3MHz	QPSK	132657	8RB#4	19.56	PASS
Band66	3MHz	16QAM	132657	8RB#4	19.87	PASS
Band66	3MHz	QPSK	132657	8RB#7	19.45	PASS
Band66	3MHz	16QAM	132657	8RB#7	19.65	PASS
Band66	3MHz	QPSK	132657	15RB#0	19.12	PASS
Band66	3MHz	16QAM	132657	15RB#0	19.65	PASS
Band66	5MHz	QPSK	131997	1RB#0	20.45	PASS
Band66	5MHz	16QAM	131997	1RB#0	20.54	PASS
Band66	5MHz	QPSK	131997	1RB#12	20.12	PASS
Band66	5MHz	16QAM	131997	1RB#12	19.23	PASS
Band66	5MHz	QPSK	131997	1RB#24	20.24	PASS
Band66	5MHz	16QAM	131997	1RB#24	19.25	PASS
Band66	5MHz	QPSK	131997	12RB#0	20.12	PASS
Band66	5MHz	16QAM	131997	12RB#0	19.25	PASS
Band66	5MHz	QPSK	131997	12RB#6	20.08	PASS
Band66	5MHz	16QAM	131997	12RB#6	19.78	PASS
Band66	5MHz	QPSK	131997	12RB#13	19.75	PASS
Band66	5MHz	16QAM	131997	12RB#13	19.65	PASS
Band66	5MHz	QPSK	131997	25RB#0	20.05	PASS
Band66	5MHz	16QAM	131997	25RB#0	19.65	PASS
Band66	5MHz	QPSK	132322	1RB#0	20.45	PASS
Band66	5MHz	16QAM	132322	1RB#0	19.25	PASS
Band66	5MHz	QPSK	132322	1RB#12	20.32	PASS
Band66	5MHz	16QAM	132322	1RB#12	19.15	PASS
Band66	5MHz	QPSK	132322	1RB#24	20.25	PASS
Band66	5MHz	16QAM	132322	1RB#24	19.15	PASS
Band66	5MHz	QPSK	132322	12RB#0	19.54	PASS
Band66	5MHz	16QAM	132322	12RB#0	19.54	PASS
Band66	5MHz	QPSK	132322	12RB#6	19.87	PASS
Band66	5MHz	16QAM	132322	12RB#6	19.87	PASS
Band66	5MHz	QPSK	132322	12RB#13	19.45	PASS
Band66	5MHz	16QAM	132322	12RB#13	19.65	PASS

Band66	5MHz	QPSK	132322	25RB#0	19.25	PASS
Band66	5MHz	16QAM	132322	25RB#0	19.65	PASS
Band66	5MHz	QPSK	132647	1RB#0	19.45	PASS
Band66	5MHz	16QAM	132647	1RB#0	19.58	PASS
Band66	5MHz	QPSK	132647	1RB#12	19.62	PASS
Band66	5MHz	16QAM	132647	1RB#12	19.54	PASS
Band66	5MHz	QPSK	132647	1RB#24	19.25	PASS
Band66	5MHz	16QAM	132647	1RB#24	19.54	PASS
Band66	5MHz	QPSK	132647	12RB#0	19.25	PASS
Band66	5MHz	16QAM	132647	12RB#0	19.45	PASS
Band66	5MHz	QPSK	132647	12RB#6	19.26	PASS
Band66	5MHz	16QAM	132647	12RB#6	19.54	PASS
Band66	5MHz	QPSK	132647	12RB#13	19.57	PASS
Band66	5MHz	16QAM	132647	12RB#13	19.45	PASS
Band66	5MHz	QPSK	132647	25RB#0	19.65	PASS
Band66	5MHz	16QAM	132647	25RB#0	19.54	PASS
Band66	10MHz	QPSK	132022	1RB#0	20.12	PASS
Band66	10MHz	16QAM	132022	1RB#0	19.26	PASS
Band66	10MHz	QPSK	132022	1RB#24	19.25	PASS
Band66	10MHz	16QAM	132022	1RB#24	19.36	PASS
Band66	10MHz	QPSK	132022	1RB#49	19.54	PASS
Band66	10MHz	16QAM	132022	1RB#49	19.45	PASS
Band66	10MHz	QPSK	132022	25RB#0	19.25	PASS
Band66	10MHz	16QAM	132022	25RB#0	19.74	PASS
Band66	10MHz	QPSK	132022	25RB#12	19.65	PASS
Band66	10MHz	16QAM	132022	25RB#12	19.75	PASS
Band66	10MHz	QPSK	132022	25RB#25	19.94	PASS
Band66	10MHz	16QAM	132022	25RB#25	19.45	PASS
Band66	10MHz	QPSK	132022	50RB#0	20.08	PASS
Band66	10MHz	16QAM	132022	50RB#0	19.46	PASS
Band66	10MHz	QPSK	132322	1RB#0	20.12	PASS
Band66	10MHz	16QAM	132322	1RB#0	20.21	PASS
Band66	10MHz	QPSK	132322	1RB#24	19.12	PASS
Band66	10MHz	16QAM	132322	1RB#24	19.26	PASS
Band66	10MHz	QPSK	132322	1RB#49	19.54	PASS
Band66	10MHz	16QAM	132322	1RB#49	19.45	PASS
Band66	10MHz	QPSK	132322	25RB#0	19.26	PASS
Band66	10MHz	16QAM	132322	25RB#0	19.25	PASS
Band66	10MHz	QPSK	132322	25RB#12	19.35	PASS
Band66	10MHz	16QAM	132322	25RB#12	19.12	PASS
Band66	10MHz	QPSK	132322	25RB#25	19.15	PASS
Band66	10MHz	16QAM	132322	25RB#25	19.54	PASS

Band66	10MHz	QPSK	132322	50RB#0	19.65	PASS
Band66	10MHz	16QAM	132322	50RB#0	19.54	PASS
Band66	10MHz	QPSK	132622	1RB#0	19.25	PASS
Band66	10MHz	16QAM	132622	1RB#0	19.34	PASS
Band66	10MHz	QPSK	132622	1RB#24	19.42	PASS
Band66	10MHz	16QAM	132622	1RB#24	19.36	PASS
Band66	10MHz	QPSK	132622	1RB#49	19.54	PASS
Band66	10MHz	16QAM	132622	1RB#49	19.25	PASS
Band66	10MHz	QPSK	132622	25RB#0	19.36	PASS
Band66	10MHz	16QAM	132622	25RB#0	19.54	PASS
Band66	10MHz	QPSK	132622	25RB#12	19.45	PASS
Band66	10MHz	16QAM	132622	25RB#12	19.54	PASS
Band66	10MHz	QPSK	132622	25RB#25	19.36	PASS
Band66	10MHz	16QAM	132622	25RB#25	19.54	PASS
Band66	10MHz	QPSK	132622	50RB#0	19.25	PASS
Band66	10MHz	16QAM	132622	50RB#0	19.35	PASS
Band66	15MHz	QPSK	132047	1RB#0	20.12	PASS
Band66	15MHz	16QAM	132047	1RB#0	20.08	PASS
Band66	15MHz	QPSK	132047	1RB#38	19.67	PASS
Band66	15MHz	16QAM	132047	1RB#38	19.58	PASS
Band66	15MHz	QPSK	132047	1RB#74	19.64	PASS
Band66	15MHz	16QAM	132047	1RB#74	19.45	PASS
Band66	15MHz	QPSK	132047	38RB#0	19.45	PASS
Band66	15MHz	16QAM	132047	38RB#0	19.25	PASS
Band66	15MHz	QPSK	132047	38RB#18	19.36	PASS
Band66	15MHz	16QAM	132047	38RB#18	19.71	PASS
Band66	15MHz	QPSK	132047	38RB#37	19.84	PASS
Band66	15MHz	16QAM	132047	38RB#37	19.61	PASS
Band66	15MHz	QPSK	132047	75RB#0	19.75	PASS
Band66	15MHz	16QAM	132047	75RB#0	19.85	PASS
Band66	15MHz	QPSK	132322	1RB#0	19.93	PASS
Band66	15MHz	16QAM	132322	1RB#0	19.92	PASS
Band66	15MHz	QPSK	132322	1RB#38	19.95	PASS
Band66	15MHz	16QAM	132322	1RB#38	19.91	PASS
Band66	15MHz	QPSK	132322	1RB#74	19.85	PASS
Band66	15MHz	16QAM	132322	1RB#74	19.75	PASS
Band66	15MHz	QPSK	132322	38RB#0	19.76	PASS
Band66	15MHz	16QAM	132322	38RB#0	19.86	PASS
Band66	15MHz	QPSK	132322	38RB#18	19.87	PASS
Band66	15MHz	16QAM	132322	38RB#18	19.78	PASS
Band66	15MHz	QPSK	132322	38RB#37	19.68	PASS
Band66	15MHz	16QAM	132322	38RB#37	19.75	PASS

Band66	15MHz	QPSK	132322	75RB#0	19.68	PASS
Band66	15MHz	16QAM	132322	75RB#0	19.78	PASS
Band66	15MHz	QPSK	132597	1RB#0	19.68	PASS
Band66	15MHz	16QAM	132597	1RB#0	19.72	PASS
Band66	15MHz	QPSK	132597	1RB#38	19.65	PASS
Band66	15MHz	16QAM	132597	1RB#38	19.58	PASS
Band66	15MHz	QPSK	132597	1RB#74	19.46	PASS
Band66	15MHz	16QAM	132597	1RB#74	19.58	PASS
Band66	15MHz	QPSK	132597	38RB#0	19.46	PASS
Band66	15MHz	16QAM	132597	38RB#0	19.58	PASS
Band66	15MHz	QPSK	132597	38RB#18	19.45	PASS
Band66	15MHz	16QAM	132597	38RB#18	19.58	PASS
Band66	15MHz	QPSK	132597	38RB#37	19.79	PASS
Band66	15MHz	16QAM	132597	38RB#37	19.58	PASS
Band66	15MHz	QPSK	132597	75RB#0	19.98	PASS
Band66	15MHz	16QAM	132597	75RB#0	19.58	PASS
Band66	20MHz	QPSK	132072	1RB#0	20.78	PASS
Band66	20MHz	16QAM	132072	1RB#0	20.58	PASS
Band66	20MHz	QPSK	132072	1RB#49	20.45	PASS
Band66	20MHz	16QAM	132072	1RB#49	19.55	PASS
Band66	20MHz	QPSK	132072	1RB#99	20.69	PASS
Band66	20MHz	16QAM	132072	1RB#99	19.87	PASS
Band66	20MHz	QPSK	132072	50RB#0	19.57	PASS
Band66	20MHz	16QAM	132072	50RB#0	19.78	PASS
Band66	20MHz	QPSK	132072	50RB#25	19.58	PASS
Band66	20MHz	16QAM	132072	50RB#25	19.69	PASS
Band66	20MHz	QPSK	132072	50RB#50	19.78	PASS
Band66	20MHz	16QAM	132072	50RB#50	19.58	PASS
Band66	20MHz	QPSK	132072	100RB#0	19.69	PASS
Band66	20MHz	16QAM	132072	100RB#0	19.74	PASS
Band66	20MHz	QPSK	132322	1RB#0	20.04	PASS
Band66	20MHz	16QAM	132322	1RB#0	19.75	PASS
Band66	20MHz	QPSK	132322	1RB#49	20.06	PASS
Band66	20MHz	16QAM	132322	1RB#49	19.78	PASS
Band66	20MHz	QPSK	132322	1RB#99	19.65	PASS
Band66	20MHz	16QAM	132322	1RB#99	19.72	PASS
Band66	20MHz	QPSK	132322	50RB#0	19.65	PASS
Band66	20MHz	16QAM	132322	50RB#0	19.45	PASS
Band66	20MHz	QPSK	132322	50RB#25	20.05	PASS
Band66	20MHz	16QAM	132322	50RB#25	19.67	PASS
Band66	20MHz	QPSK	132322	50RB#50	19.54	PASS
Band66	20MHz	16QAM	132322	50RB#50	19.65	PASS

Band66	20MHz	QPSK	132322	100RB#0	19.25	PASS
Band66	20MHz	16QAM	132322	100RB#0	19.65	PASS
Band66	20MHz	QPSK	132572	1RB#0	19.71	PASS
Band66	20MHz	16QAM	132572	1RB#0	19.56	PASS
Band66	20MHz	QPSK	132572	1RB#49	19.42	PASS
Band66	20MHz	16QAM	132572	1RB#49	19.36	PASS
Band66	20MHz	QPSK	132572	1RB#99	19.54	PASS
Band66	20MHz	16QAM	132572	1RB#99	19.25	PASS
Band66	20MHz	QPSK	132572	50RB#0	19.36	PASS
Band66	20MHz	16QAM	132572	50RB#0	19.45	PASS
Band66	20MHz	QPSK	132572	50RB#25	19.26	PASS
Band66	20MHz	16QAM	132572	50RB#25	19.36	PASS
Band66	20MHz	QPSK	132572	50RB#50	19.54	PASS
Band66	20MHz	16QAM	132572	50RB#50	19.25	PASS
Band66	20MHz	QPSK	132572	100RB#0	19.35	PASS
Band66	20MHz	16QAM	132572	100RB#0	19.45	PASS

LTE(P3): Hotspot ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band66	1.4MHz	QPSK	131979	1RB#0	18.95	PASS
Band66	1.4MHz	16QAM	131979	1RB#0	18.74	PASS
Band66	1.4MHz	QPSK	131979	1RB#2	18.91	PASS
Band66	1.4MHz	16QAM	131979	1RB#2	18.69	PASS
Band66	1.4MHz	QPSK	131979	1RB#5	18.96	PASS
Band66	1.4MHz	16QAM	131979	1RB#5	18.71	PASS
Band66	1.4MHz	QPSK	131979	3RB#0	18.95	PASS
Band66	1.4MHz	16QAM	131979	3RB#0	18.72	PASS
Band66	1.4MHz	QPSK	131979	3RB#1	18.94	PASS
Band66	1.4MHz	16QAM	131979	3RB#1	18.72	PASS
Band66	1.4MHz	QPSK	131979	3RB#3	18.94	PASS
Band66	1.4MHz	16QAM	131979	3RB#3	18.68	PASS
Band66	1.4MHz	QPSK	131979	6RB#0	18.92	PASS
Band66	1.4MHz	16QAM	131979	6RB#0	18.88	PASS
Band66	1.4MHz	QPSK	132322	1RB#0	18.97	PASS
Band66	1.4MHz	16QAM	132322	1RB#0	18.77	PASS
Band66	1.4MHz	QPSK	132322	1RB#2	18.92	PASS
Band66	1.4MHz	16QAM	132322	1RB#2	18.76	PASS
Band66	1.4MHz	QPSK	132322	1RB#5	18.94	PASS
Band66	1.4MHz	16QAM	132322	1RB#5	18.77	PASS
Band66	1.4MHz	QPSK	132322	3RB#0	18.91	PASS
Band66	1.4MHz	16QAM	132322	3RB#0	18.68	PASS

Band66	1.4MHz	QPSK	132322	3RB#1	18.89	PASS
Band66	1.4MHz	16QAM	132322	3RB#1	18.68	PASS
Band66	1.4MHz	QPSK	132322	3RB#3	18.90	PASS
Band66	1.4MHz	16QAM	132322	3RB#3	18.68	PASS
Band66	1.4MHz	QPSK	132322	6RB#0	18.87	PASS
Band66	1.4MHz	16QAM	132322	6RB#0	18.71	PASS
Band66	1.4MHz	QPSK	132665	1RB#0	18.73	PASS
Band66	1.4MHz	16QAM	132665	1RB#0	18.54	PASS
Band66	1.4MHz	QPSK	132665	1RB#2	18.66	PASS
Band66	1.4MHz	16QAM	132665	1RB#2	18.51	PASS
Band66	1.4MHz	QPSK	132665	1RB#5	18.70	PASS
Band66	1.4MHz	16QAM	132665	1RB#5	18.54	PASS
Band66	1.4MHz	QPSK	132665	3RB#0	18.68	PASS
Band66	1.4MHz	16QAM	132665	3RB#0	18.46	PASS
Band66	1.4MHz	QPSK	132665	3RB#1	18.69	PASS
Band66	1.4MHz	16QAM	132665	3RB#1	18.44	PASS
Band66	1.4MHz	QPSK	132665	3RB#3	18.64	PASS
Band66	1.4MHz	16QAM	132665	3RB#3	18.43	PASS
Band66	1.4MHz	QPSK	132665	6RB#0	18.63	PASS
Band66	1.4MHz	16QAM	132665	6RB#0	18.49	PASS
Band66	3MHz	QPSK	131987	1RB#0	18.93	PASS
Band66	3MHz	16QAM	131987	1RB#0	18.92	PASS
Band66	3MHz	QPSK	131987	1RB#8	18.94	PASS
Band66	3MHz	16QAM	131987	1RB#8	18.93	PASS
Band66	3MHz	QPSK	131987	1RB#14	18.92	PASS
Band66	3MHz	16QAM	131987	1RB#14	18.86	PASS
Band66	3MHz	QPSK	131987	8RB#0	18.94	PASS
Band66	3MHz	16QAM	131987	8RB#0	18.97	PASS
Band66	3MHz	QPSK	131987	8RB#4	18.96	PASS
Band66	3MHz	16QAM	131987	8RB#4	18.97	PASS
Band66	3MHz	QPSK	131987	8RB#7	18.95	PASS
Band66	3MHz	16QAM	131987	8RB#7	18.92	PASS
Band66	3MHz	QPSK	131987	15RB#0	18.92	PASS
Band66	3MHz	16QAM	131987	15RB#0	18.94	PASS
Band66	3MHz	QPSK	132322	1RB#0	18.92	PASS
Band66	3MHz	16QAM	132322	1RB#0	18.90	PASS
Band66	3MHz	QPSK	132322	1RB#8	18.91	PASS
Band66	3MHz	16QAM	132322	1RB#8	18.90	PASS
Band66	3MHz	QPSK	132322	1RB#14	18.86	PASS
Band66	3MHz	16QAM	132322	1RB#14	18.82	PASS
Band66	3MHz	QPSK	132322	8RB#0	18.91	PASS
Band66	3MHz	16QAM	132322	8RB#0	18.91	PASS

Band66	3MHz	QPSK	132322	8RB#4	18.91	PASS
Band66	3MHz	16QAM	132322	8RB#4	18.92	PASS
Band66	3MHz	QPSK	132322	8RB#7	18.88	PASS
Band66	3MHz	16QAM	132322	8RB#7	18.87	PASS
Band66	3MHz	QPSK	132322	15RB#0	18.87	PASS
Band66	3MHz	16QAM	132322	15RB#0	18.90	PASS
Band66	3MHz	QPSK	132657	1RB#0	18.69	PASS
Band66	3MHz	16QAM	132657	1RB#0	18.68	PASS
Band66	3MHz	QPSK	132657	1RB#8	18.66	PASS
Band66	3MHz	16QAM	132657	1RB#8	18.61	PASS
Band66	3MHz	QPSK	132657	1RB#14	18.62	PASS
Band66	3MHz	16QAM	132657	1RB#14	18.59	PASS
Band66	3MHz	QPSK	132657	8RB#0	18.73	PASS
Band66	3MHz	16QAM	132657	8RB#0	18.72	PASS
Band66	3MHz	QPSK	132657	8RB#4	18.71	PASS
Band66	3MHz	16QAM	132657	8RB#4	18.76	PASS
Band66	3MHz	QPSK	132657	8RB#7	18.67	PASS
Band66	3MHz	16QAM	132657	8RB#7	18.66	PASS
Band66	3MHz	QPSK	132657	15RB#0	18.65	PASS
Band66	3MHz	16QAM	132657	15RB#0	18.65	PASS
Band66	5MHz	QPSK	131997	1RB#0	19.13	PASS
Band66	5MHz	16QAM	131997	1RB#0	19.00	PASS
Band66	5MHz	QPSK	131997	1RB#12	19.12	PASS
Band66	5MHz	16QAM	131997	1RB#12	18.95	PASS
Band66	5MHz	QPSK	131997	1RB#24	19.10	PASS
Band66	5MHz	16QAM	131997	1RB#24	18.95	PASS
Band66	5MHz	QPSK	131997	12RB#0	19.00	PASS
Band66	5MHz	16QAM	131997	12RB#0	18.99	PASS
Band66	5MHz	QPSK	131997	12RB#6	19.02	PASS
Band66	5MHz	16QAM	131997	12RB#6	18.99	PASS
Band66	5MHz	QPSK	131997	12RB#13	18.99	PASS
Band66	5MHz	16QAM	131997	12RB#13	18.97	PASS
Band66	5MHz	QPSK	131997	25RB#0	19.02	PASS
Band66	5MHz	16QAM	131997	25RB#0	18.98	PASS
Band66	5MHz	QPSK	132322	1RB#0	19.12	PASS
Band66	5MHz	16QAM	132322	1RB#0	18.99	PASS
Band66	5MHz	QPSK	132322	1RB#12	19.05	PASS
Band66	5MHz	16QAM	132322	1RB#12	18.88	PASS
Band66	5MHz	QPSK	132322	1RB#24	19.02	PASS
Band66	5MHz	16QAM	132322	1RB#24	18.89	PASS
Band66	5MHz	QPSK	132322	12RB#0	18.94	PASS
Band66	5MHz	16QAM	132322	12RB#0	18.90	PASS

Band66	5MHz	QPSK	132322	12RB#6	18.92	PASS
Band66	5MHz	16QAM	132322	12RB#6	18.92	PASS
Band66	5MHz	QPSK	132322	12RB#13	18.89	PASS
Band66	5MHz	16QAM	132322	12RB#13	18.88	PASS
Band66	5MHz	QPSK	132322	25RB#0	18.95	PASS
Band66	5MHz	16QAM	132322	25RB#0	18.91	PASS
Band66	5MHz	QPSK	132647	1RB#0	18.86	PASS
Band66	5MHz	16QAM	132647	1RB#0	18.70	PASS
Band66	5MHz	QPSK	132647	1RB#12	18.80	PASS
Band66	5MHz	16QAM	132647	1RB#12	18.65	PASS
Band66	5MHz	QPSK	132647	1RB#24	18.76	PASS
Band66	5MHz	16QAM	132647	1RB#24	18.61	PASS
Band66	5MHz	QPSK	132647	12RB#0	18.73	PASS
Band66	5MHz	16QAM	132647	12RB#0	18.71	PASS
Band66	5MHz	QPSK	132647	12RB#6	18.74	PASS
Band66	5MHz	16QAM	132647	12RB#6	18.69	PASS
Band66	5MHz	QPSK	132647	12RB#13	18.64	PASS
Band66	5MHz	16QAM	132647	12RB#13	18.63	PASS
Band66	5MHz	QPSK	132647	25RB#0	18.72	PASS
Band66	5MHz	16QAM	132647	25RB#0	18.70	PASS
Band66	10MHz	QPSK	132022	1RB#0	19.04	PASS
Band66	10MHz	16QAM	132022	1RB#0	19.05	PASS
Band66	10MHz	QPSK	132022	1RB#24	18.99	PASS
Band66	10MHz	16QAM	132022	1RB#24	18.94	PASS
Band66	10MHz	QPSK	132022	1RB#49	18.90	PASS
Band66	10MHz	16QAM	132022	1RB#49	18.90	PASS
Band66	10MHz	QPSK	132022	25RB#0	18.99	PASS
Band66	10MHz	16QAM	132022	25RB#0	18.96	PASS
Band66	10MHz	QPSK	132022	25RB#12	18.99	PASS
Band66	10MHz	16QAM	132022	25RB#12	18.95	PASS
Band66	10MHz	QPSK	132022	25RB#25	18.94	PASS
Band66	10MHz	16QAM	132022	25RB#25	18.91	PASS
Band66	10MHz	QPSK	132022	50RB#0	19.00	PASS
Band66	10MHz	16QAM	132022	50RB#0	18.96	PASS
Band66	10MHz	QPSK	132322	1RB#0	19.05	PASS
Band66	10MHz	16QAM	132322	1RB#0	19.02	PASS
Band66	10MHz	QPSK	132322	1RB#24	18.93	PASS
Band66	10MHz	16QAM	132322	1RB#24	18.85	PASS
Band66	10MHz	QPSK	132322	1RB#49	18.87	PASS
Band66	10MHz	16QAM	132322	1RB#49	18.92	PASS
Band66	10MHz	QPSK	132322	25RB#0	18.95	PASS
Band66	10MHz	16QAM	132322	25RB#0	18.92	PASS

Band66	10MHz	QPSK	132322	25RB#12	18.93	PASS
Band66	10MHz	16QAM	132322	25RB#12	18.91	PASS
Band66	10MHz	QPSK	132322	25RB#25	18.88	PASS
Band66	10MHz	16QAM	132322	25RB#25	18.82	PASS
Band66	10MHz	QPSK	132322	50RB#0	18.90	PASS
Band66	10MHz	16QAM	132322	50RB#0	18.87	PASS
Band66	10MHz	QPSK	132622	1RB#0	18.68	PASS
Band66	10MHz	16QAM	132622	1RB#0	18.64	PASS
Band66	10MHz	QPSK	132622	1RB#24	18.65	PASS
Band66	10MHz	16QAM	132622	1RB#24	18.63	PASS
Band66	10MHz	QPSK	132622	1RB#49	18.60	PASS
Band66	10MHz	16QAM	132622	1RB#49	18.65	PASS
Band66	10MHz	QPSK	132622	25RB#0	18.69	PASS
Band66	10MHz	16QAM	132622	25RB#0	18.66	PASS
Band66	10MHz	QPSK	132622	25RB#12	18.70	PASS
Band66	10MHz	16QAM	132622	25RB#12	18.65	PASS
Band66	10MHz	QPSK	132622	25RB#25	18.62	PASS
Band66	10MHz	16QAM	132622	25RB#25	18.56	PASS
Band66	10MHz	QPSK	132622	50RB#0	18.68	PASS
Band66	10MHz	16QAM	132622	50RB#0	18.64	PASS
Band66	15MHz	QPSK	132047	1RB#0	19.07	PASS
Band66	15MHz	16QAM	132047	1RB#0	19.03	PASS
Band66	15MHz	QPSK	132047	1RB#38	18.98	PASS
Band66	15MHz	16QAM	132047	1RB#38	18.95	PASS
Band66	15MHz	QPSK	132047	1RB#74	18.97	PASS
Band66	15MHz	16QAM	132047	1RB#74	18.96	PASS
Band66	15MHz	QPSK	132047	38RB#0	18.94	PASS
Band66	15MHz	16QAM	132047	38RB#0	18.94	PASS
Band66	15MHz	QPSK	132047	38RB#18	18.98	PASS
Band66	15MHz	16QAM	132047	38RB#18	18.96	PASS
Band66	15MHz	QPSK	132047	38RB#37	18.95	PASS
Band66	15MHz	16QAM	132047	38RB#37	18.96	PASS
Band66	15MHz	QPSK	132047	75RB#0	18.95	PASS
Band66	15MHz	16QAM	132047	75RB#0	18.91	PASS
Band66	15MHz	QPSK	132322	1RB#0	18.99	PASS
Band66	15MHz	16QAM	132322	1RB#0	18.97	PASS
Band66	15MHz	QPSK	132322	1RB#38	18.93	PASS
Band66	15MHz	16QAM	132322	1RB#38	18.94	PASS
Band66	15MHz	QPSK	132322	1RB#74	18.80	PASS
Band66	15MHz	16QAM	132322	1RB#74	18.82	PASS
Band66	15MHz	QPSK	132322	38RB#0	18.89	PASS
Band66	15MHz	16QAM	132322	38RB#0	18.89	PASS

Band66	15MHz	QPSK	132322	38RB#18	18.89	PASS
Band66	15MHz	16QAM	132322	38RB#18	18.88	PASS
Band66	15MHz	QPSK	132322	38RB#37	18.89	PASS
Band66	15MHz	16QAM	132322	38RB#37	18.88	PASS
Band66	15MHz	QPSK	132322	75RB#0	18.91	PASS
Band66	15MHz	16QAM	132322	75RB#0	18.85	PASS
Band66	15MHz	QPSK	132597	1RB#0	18.64	PASS
Band66	15MHz	16QAM	132597	1RB#0	18.64	PASS
Band66	15MHz	QPSK	132597	1RB#38	18.60	PASS
Band66	15MHz	16QAM	132597	1RB#38	18.57	PASS
Band66	15MHz	QPSK	132597	1RB#74	18.49	PASS
Band66	15MHz	16QAM	132597	1RB#74	18.49	PASS
Band66	15MHz	QPSK	132597	38RB#0	18.60	PASS
Band66	15MHz	16QAM	132597	38RB#0	18.59	PASS
Band66	15MHz	QPSK	132597	38RB#18	18.59	PASS
Band66	15MHz	16QAM	132597	38RB#18	18.59	PASS
Band66	15MHz	QPSK	132597	38RB#37	18.59	PASS
Band66	15MHz	16QAM	132597	38RB#37	18.59	PASS
Band66	15MHz	QPSK	132597	75RB#0	18.60	PASS
Band66	15MHz	16QAM	132597	75RB#0	18.55	PASS
Band66	20MHz	QPSK	132072	1RB#0	19.15	PASS
Band66	20MHz	16QAM	132072	1RB#0	19.06	PASS
Band66	20MHz	QPSK	132072	1RB#49	19.00	PASS
Band66	20MHz	16QAM	132072	1RB#49	18.88	PASS
Band66	20MHz	QPSK	132072	1RB#99	19.02	PASS
Band66	20MHz	16QAM	132072	1RB#99	18.86	PASS
Band66	20MHz	QPSK	132072	50RB#0	18.97	PASS
Band66	20MHz	16QAM	132072	50RB#0	18.96	PASS
Band66	20MHz	QPSK	132072	50RB#25	18.99	PASS
Band66	20MHz	16QAM	132072	50RB#25	18.97	PASS
Band66	20MHz	QPSK	132072	50RB#50	18.96	PASS
Band66	20MHz	16QAM	132072	50RB#50	18.93	PASS
Band66	20MHz	QPSK	132072	100RB#0	18.99	PASS
Band66	20MHz	16QAM	132072	100RB#0	18.96	PASS
Band66	20MHz	QPSK	132322	1RB#0	19.06	PASS
Band66	20MHz	16QAM	132322	1RB#0	18.93	PASS
Band66	20MHz	QPSK	132322	1RB#49	19.00	PASS
Band66	20MHz	16QAM	132322	1RB#49	18.91	PASS
Band66	20MHz	QPSK	132322	1RB#99	18.86	PASS
Band66	20MHz	16QAM	132322	1RB#99	18.77	PASS
Band66	20MHz	QPSK	132322	50RB#0	18.97	PASS
Band66	20MHz	16QAM	132322	50RB#0	18.98	PASS

Band66	20MHz	QPSK	132322	50RB#25	19.01	PASS
Band66	20MHz	16QAM	132322	50RB#25	18.98	PASS
Band66	20MHz	QPSK	132322	50RB#50	18.84	PASS
Band66	20MHz	16QAM	132322	50RB#50	18.81	PASS
Band66	20MHz	QPSK	132322	100RB#0	18.90	PASS
Band66	20MHz	16QAM	132322	100RB#0	18.89	PASS
Band66	20MHz	QPSK	132572	1RB#0	18.65	PASS
Band66	20MHz	16QAM	132572	1RB#0	18.52	PASS
Band66	20MHz	QPSK	132572	1RB#49	18.58	PASS
Band66	20MHz	16QAM	132572	1RB#49	18.47	PASS
Band66	20MHz	QPSK	132572	1RB#99	18.53	PASS
Band66	20MHz	16QAM	132572	1RB#99	18.41	PASS
Band66	20MHz	QPSK	132572	50RB#0	18.57	PASS
Band66	20MHz	16QAM	132572	50RB#0	18.53	PASS
Band66	20MHz	QPSK	132572	50RB#25	18.55	PASS
Band66	20MHz	16QAM	132572	50RB#25	18.52	PASS
Band66	20MHz	QPSK	132572	50RB#50	18.49	PASS
Band66	20MHz	16QAM	132572	50RB#50	18.52	PASS
Band66	20MHz	QPSK	132572	100RB#0	18.57	PASS
Band66	20MHz	16QAM	132572	100RB#0	18.54	PASS

LTE(P1):

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band71	5MHz	QPSK	133147	1RB#0	23.42	PASS
Band71	5MHz	16QAM	133147	1RB#0	22.36	PASS
Band71	5MHz	QPSK	133147	1RB#12	23.54	PASS
Band71	5MHz	16QAM	133147	1RB#12	22.25	PASS
Band71	5MHz	QPSK	133147	1RB#24	23.36	PASS
Band71	5MHz	16QAM	133147	1RB#24	22.54	PASS
Band71	5MHz	QPSK	133147	12RB#0	22.25	PASS
Band71	5MHz	16QAM	133147	12RB#0	21.36	PASS
Band71	5MHz	QPSK	133147	12RB#6	22.57	PASS
Band71	5MHz	16QAM	133147	12RB#6	21.56	PASS
Band71	5MHz	QPSK	133147	12RB#13	22.58	PASS
Band71	5MHz	16QAM	133147	12RB#13	21.12	PASS
Band71	5MHz	QPSK	133147	25RB#0	22.26	PASS
Band71	5MHz	16QAM	133147	25RB#0	21.25	PASS
Band71	5MHz	QPSK	133297	1RB#0	23.65	PASS
Band71	5MHz	16QAM	133297	1RB#0	22.11	PASS
Band71	5MHz	QPSK	133297	1RB#12	23.45	PASS
Band71	5MHz	16QAM	133297	1RB#12	22.36	PASS

Band71	5MHz	QPSK	133297	1RB#24	23.42	PASS
Band71	5MHz	16QAM	133297	1RB#24	22.36	PASS
Band71	5MHz	QPSK	133297	12RB#0	22.36	PASS
Band71	5MHz	16QAM	133297	12RB#0	21.45	PASS
Band71	5MHz	QPSK	133297	12RB#6	22.25	PASS
Band71	5MHz	16QAM	133297	12RB#6	21.36	PASS
Band71	5MHz	QPSK	133297	12RB#13	22.54	PASS
Band71	5MHz	16QAM	133297	12RB#13	21.28	PASS
Band71	5MHz	QPSK	133297	25RB#0	22.45	PASS
Band71	5MHz	16QAM	133297	25RB#0	21.36	PASS
Band71	5MHz	QPSK	133447	1RB#0	23.54	PASS
Band71	5MHz	16QAM	133447	1RB#0	22.25	PASS
Band71	5MHz	QPSK	133447	1RB#12	23.65	PASS
Band71	5MHz	16QAM	133447	1RB#12	22.45	PASS
Band71	5MHz	QPSK	133447	1RB#24	23.57	PASS
Band71	5MHz	16QAM	133447	1RB#24	22.64	PASS
Band71	5MHz	QPSK	133447	12RB#0	22.65	PASS
Band71	5MHz	16QAM	133447	12RB#0	21.52	PASS
Band71	5MHz	QPSK	133447	12RB#6	22.36	PASS
Band71	5MHz	16QAM	133447	12RB#6	21.45	PASS
Band71	5MHz	QPSK	133447	12RB#13	22.25	PASS
Band71	5MHz	16QAM	133447	12RB#13	21.45	PASS
Band71	5MHz	QPSK	133447	25RB#0	22.25	PASS
Band71	5MHz	16QAM	133447	25RB#0	21.36	PASS
Band71	10MHz	QPSK	133172	1RB#0	23.56	PASS
Band71	10MHz	16QAM	133172	1RB#0	22.46	PASS
Band71	10MHz	QPSK	133172	1RB#24	23.57	PASS
Band71	10MHz	16QAM	133172	1RB#24	22.42	PASS
Band71	10MHz	QPSK	133172	1RB#49	23.63	PASS
Band71	10MHz	16QAM	133172	1RB#49	22.49	PASS
Band71	10MHz	QPSK	133172	25RB#0	22.56	PASS
Band71	10MHz	16QAM	133172	25RB#0	21.51	PASS
Band71	10MHz	QPSK	133172	25RB#12	22.56	PASS
Band71	10MHz	16QAM	133172	25RB#12	21.52	PASS
Band71	10MHz	QPSK	133172	25RB#25	22.57	PASS
Band71	10MHz	16QAM	133172	25RB#25	21.58	PASS
Band71	10MHz	QPSK	133172	50RB#0	22.55	PASS
Band71	10MHz	16QAM	133172	50RB#0	21.55	PASS
Band71	10MHz	QPSK	133297	1RB#0	23.54	PASS
Band71	10MHz	16QAM	133297	1RB#0	22.31	PASS
Band71	10MHz	QPSK	133297	1RB#24	23.49	PASS
Band71	10MHz	16QAM	133297	1RB#24	22.24	PASS

Band71	10MHz	QPSK	133297	1RB#49	23.52	PASS
Band71	10MHz	16QAM	133297	1RB#49	22.26	PASS
Band71	10MHz	QPSK	133297	25RB#0	22.49	PASS
Band71	10MHz	16QAM	133297	25RB#0	21.58	PASS
Band71	10MHz	QPSK	133297	25RB#12	22.50	PASS
Band71	10MHz	16QAM	133297	25RB#12	21.57	PASS
Band71	10MHz	QPSK	133297	25RB#25	22.44	PASS
Band71	10MHz	16QAM	133297	25RB#25	21.57	PASS
Band71	10MHz	QPSK	133297	50RB#0	22.49	PASS
Band71	10MHz	16QAM	133297	50RB#0	21.58	PASS
Band71	10MHz	QPSK	133422	1RB#0	23.54	PASS
Band71	10MHz	16QAM	133422	1RB#0	22.51	PASS
Band71	10MHz	QPSK	133422	1RB#24	23.54	PASS
Band71	10MHz	16QAM	133422	1RB#24	22.51	PASS
Band71	10MHz	QPSK	133422	1RB#49	23.58	PASS
Band71	10MHz	16QAM	133422	1RB#49	22.56	PASS
Band71	10MHz	QPSK	133422	25RB#0	22.50	PASS
Band71	10MHz	16QAM	133422	25RB#0	21.54	PASS
Band71	10MHz	QPSK	133422	25RB#12	22.50	PASS
Band71	10MHz	16QAM	133422	25RB#12	21.53	PASS
Band71	10MHz	QPSK	133422	25RB#25	22.51	PASS
Band71	10MHz	16QAM	133422	25RB#25	21.52	PASS
Band71	10MHz	QPSK	133422	50RB#0	22.50	PASS
Band71	10MHz	16QAM	133422	50RB#0	21.55	PASS
Band71	15MHz	QPSK	133197	1RB#0	23.54	PASS
Band71	15MHz	16QAM	133197	1RB#0	22.34	PASS
Band71	15MHz	QPSK	133197	1RB#38	23.59	PASS
Band71	15MHz	16QAM	133197	1RB#38	22.35	PASS
Band71	15MHz	QPSK	133197	1RB#74	23.47	PASS
Band71	15MHz	16QAM	133197	1RB#74	22.22	PASS
Band71	15MHz	QPSK	133197	38RB#0	22.35	PASS
Band71	15MHz	16QAM	133197	38RB#0	22.35	PASS
Band71	15MHz	QPSK	133197	38RB#18	22.38	PASS
Band71	15MHz	16QAM	133197	38RB#18	22.34	PASS
Band71	15MHz	QPSK	133197	38RB#37	22.25	PASS
Band71	15MHz	16QAM	133197	38RB#37	22.24	PASS
Band71	15MHz	QPSK	133197	75RB#0	22.58	PASS
Band71	15MHz	16QAM	133197	75RB#0	21.61	PASS
Band71	15MHz	QPSK	133297	1RB#0	23.61	PASS
Band71	15MHz	16QAM	133297	1RB#0	22.57	PASS
Band71	15MHz	QPSK	133297	1RB#38	23.61	PASS
Band71	15MHz	16QAM	133297	1RB#38	22.55	PASS

Band71	15MHz	QPSK	133297	1RB#74	23.53	PASS
Band71	15MHz	16QAM	133297	1RB#74	22.56	PASS
Band71	15MHz	QPSK	133297	38RB#0	22.58	PASS
Band71	15MHz	16QAM	133297	38RB#0	22.65	PASS
Band71	15MHz	QPSK	133297	38RB#18	22.52	PASS
Band71	15MHz	16QAM	133297	38RB#18	22.55	PASS
Band71	15MHz	QPSK	133297	38RB#37	22.55	PASS
Band71	15MHz	16QAM	133297	38RB#37	22.56	PASS
Band71	15MHz	QPSK	133297	75RB#0	22.50	PASS
Band71	15MHz	16QAM	133297	75RB#0	21.56	PASS
Band71	15MHz	QPSK	133397	1RB#0	23.39	PASS
Band71	15MHz	16QAM	133397	1RB#0	22.54	PASS
Band71	15MHz	QPSK	133397	1RB#38	23.42	PASS
Band71	15MHz	16QAM	133397	1RB#38	22.55	PASS
Band71	15MHz	QPSK	133397	1RB#74	23.44	PASS
Band71	15MHz	16QAM	133397	1RB#74	22.58	PASS
Band71	15MHz	QPSK	133397	38RB#0	22.55	PASS
Band71	15MHz	16QAM	133397	38RB#0	22.53	PASS
Band71	15MHz	QPSK	133397	38RB#18	22.56	PASS
Band71	15MHz	16QAM	133397	38RB#18	22.57	PASS
Band71	15MHz	QPSK	133397	38RB#37	22.58	PASS
Band71	15MHz	16QAM	133397	38RB#37	22.58	PASS
Band71	15MHz	QPSK	133397	75RB#0	22.48	PASS
Band71	15MHz	16QAM	133397	75RB#0	21.60	PASS
Band71	20MHz	QPSK	133222	1RB#0	23.58	PASS
Band71	20MHz	16QAM	133222	1RB#0	22.82	PASS
Band71	20MHz	QPSK	133222	1RB#49	23.60	PASS
Band71	20MHz	16QAM	133222	1RB#49	22.77	PASS
Band71	20MHz	QPSK	133222	1RB#99	23.51	PASS
Band71	20MHz	16QAM	133222	1RB#99	22.68	PASS
Band71	20MHz	QPSK	133222	50RB#0	22.65	PASS
Band71	20MHz	16QAM	133222	50RB#0	21.65	PASS
Band71	20MHz	QPSK	133222	50RB#25	22.64	PASS
Band71	20MHz	16QAM	133222	50RB#25	21.65	PASS
Band71	20MHz	QPSK	133222	50RB#50	22.57	PASS
Band71	20MHz	16QAM	133222	50RB#50	21.64	PASS
Band71	20MHz	QPSK	133222	100RB#0	22.58	PASS
Band71	20MHz	16QAM	133222	100RB#0	21.58	PASS
Band71	20MHz	QPSK	133322	1RB#0	23.53	PASS
Band71	20MHz	16QAM	133322	1RB#0	22.39	PASS
Band71	20MHz	QPSK	133322	1RB#49	23.49	PASS
Band71	20MHz	16QAM	133322	1RB#49	22.35	PASS

Band71	20MHz	QPSK	133322	1RB#99	23.50	PASS
Band71	20MHz	16QAM	133322	1RB#99	22.39	PASS
Band71	20MHz	QPSK	133322	50RB#0	22.52	PASS
Band71	20MHz	16QAM	133322	50RB#0	21.65	PASS
Band71	20MHz	QPSK	133322	50RB#25	22.54	PASS
Band71	20MHz	16QAM	133322	50RB#25	21.66	PASS
Band71	20MHz	QPSK	133322	50RB#50	22.57	PASS
Band71	20MHz	16QAM	133322	50RB#50	21.70	PASS
Band71	20MHz	QPSK	133322	100RB#0	22.55	PASS
Band71	20MHz	16QAM	133322	100RB#0	21.63	PASS
Band71	20MHz	QPSK	133372	1RB#0	23.58	PASS
Band71	20MHz	16QAM	133372	1RB#0	22.46	PASS
Band71	20MHz	QPSK	133372	1RB#49	23.62	PASS
Band71	20MHz	16QAM	133372	1RB#49	22.50	PASS
Band71	20MHz	QPSK	133372	1RB#99	23.67	PASS
Band71	20MHz	16QAM	133372	1RB#99	22.45	PASS
Band71	20MHz	QPSK	133372	50RB#0	22.53	PASS
Band71	20MHz	16QAM	133372	50RB#0	21.61	PASS
Band71	20MHz	QPSK	133372	50RB#25	22.53	PASS
Band71	20MHz	16QAM	133372	50RB#25	21.61	PASS
Band71	20MHz	QPSK	133372	50RB#50	22.55	PASS
Band71	20MHz	16QAM	133372	50RB#50	21.62	PASS
Band71	20MHz	QPSK	133372	100RB#0	22.53	PASS
Band71	20MHz	16QAM	133372	100RB#0	21.60	PASS

5G NR**5G NR(P1):**

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N2	15	5	DFT-QPSK	L	Outer_Full	21.38	PC3	PASS
N2	15	5	DFT-QPSK	L	Inner_Full	22.40	PC3	PASS
N2	15	5	DFT-QPSK	L	Edge_1RB_Left	21.27	PC3	PASS
N2	15	5	DFT-QPSK	L	Edge_1RB_Right	21.21	PC3	PASS
N2	15	5	DFT-16QAM	L	Outer_Full	20.37	PC3	PASS
N2	15	5	DFT-16QAM	L	Inner_Full	21.40	PC3	PASS
N2	15	5	DFT-16QAM	L	Edge_1RB_Left	20.57	PC3	PASS
N2	15	5	DFT-16QAM	L	Edge_1RB_Right	20.45	PC3	PASS
N2	15	5	DFT-QPSK	M	Outer_Full	20.84	PC3	PASS
N2	15	5	DFT-QPSK	M	Inner_Full	20.79	PC3	PASS
N2	15	5	DFT-QPSK	M	Edge_1RB_Left	20.81	PC3	PASS
N2	15	5	DFT-QPSK	M	Edge_1RB_Right	20.86	PC3	PASS
N2	15	5	DFT-16QAM	M	Outer_Full	20.82	PC3	PASS
N2	15	5	DFT-16QAM	M	Inner_Full	20.83	PC3	PASS
N2	15	5	DFT-16QAM	M	Edge_1RB_Left	20.02	PC3	PASS
N2	15	5	DFT-16QAM	M	Edge_1RB_Right	20.05	PC3	PASS
N2	15	5	DFT-QPSK	H	Outer_Full	20.94	PC3	PASS
N2	15	5	DFT-QPSK	H	Inner_Full	20.86	PC3	PASS
N2	15	5	DFT-QPSK	H	Edge_1RB_Left	20.96	PC3	PASS
N2	15	5	DFT-QPSK	H	Edge_1RB_Right	20.98	PC3	PASS
N2	15	5	DFT-16QAM	H	Outer_Full	20.92	PC3	PASS
N2	15	5	DFT-16QAM	H	Inner_Full	20.97	PC3	PASS
N2	15	5	DFT-16QAM	H	Edge_1RB_Left	20.06	PC3	PASS
N2	15	5	DFT-16QAM	H	Edge_1RB_Right	20.28	PC3	PASS
N2	15	10	DFT-QPSK	L	Outer_Full	21.32	PC3	PASS
N2	15	10	DFT-QPSK	L	Inner_Full	22.34	PC3	PASS
N2	15	10	DFT-QPSK	L	Edge_1RB_Left	21.19	PC3	PASS
N2	15	10	DFT-QPSK	L	Edge_1RB_Right	21.01	PC3	PASS
N2	15	10	DFT-16QAM	L	Outer_Full	20.37	PC3	PASS
N2	15	10	DFT-16QAM	L	Inner_Full	21.42	PC3	PASS
N2	15	10	DFT-16QAM	L	Edge_1RB_Left	20.45	PC3	PASS
N2	15	10	DFT-16QAM	L	Edge_1RB_Right	20.28	PC3	PASS
N2	15	10	DFT-QPSK	M	Outer_Full	20.80	PC3	PASS
N2	15	10	DFT-QPSK	M	Inner_Full	20.69	PC3	PASS
N2	15	10	DFT-QPSK	M	Edge_1RB_Left	20.73	PC3	PASS
N2	15	10	DFT-QPSK	M	Edge_1RB_Right	20.84	PC3	PASS
N2	15	10	DFT-16QAM	M	Outer_Full	20.79	PC3	PASS
N2	15	10	DFT-16QAM	M	Inner_Full	20.77	PC3	PASS

N2	15	10	DFT-16QAM	M	Edge_1RB_Left	20.17	PC3	PASS
N2	15	10	DFT-16QAM	M	Edge_1RB_Right	20.12	PC3	PASS
N2	15	10	DFT-QPSK	H	Outer_Full	20.01	PC3	PASS
N2	15	10	DFT-QPSK	H	Inner_Full	20.96	PC3	PASS
N2	15	10	DFT-QPSK	H	Edge_1RB_Left	20.28	PC3	PASS
N2	15	10	DFT-QPSK	H	Edge_1RB_Right	20.91	PC3	PASS
N2	15	10	DFT-16QAM	H	Outer_Full	20.01	PC3	PASS
N2	15	10	DFT-16QAM	H	Inner_Full	20.99	PC3	PASS
N2	15	10	DFT-16QAM	H	Edge_1RB_Left	20.45	PC3	PASS
N2	15	10	DFT-16QAM	H	Edge_1RB_Right	20.06	PC3	PASS
N2	15	15	DFT-QPSK	L	Outer_Full	21.22	PC3	PASS
N2	15	15	DFT-QPSK	L	Inner_Full	22.26	PC3	PASS
N2	15	15	DFT-QPSK	L	Edge_1RB_Left	21.13	PC3	PASS
N2	15	15	DFT-QPSK	L	Edge_1RB_Right	20.52	PC3	PASS
N2	15	15	DFT-16QAM	L	Outer_Full	20.23	PC3	PASS
N2	15	15	DFT-16QAM	L	Inner_Full	21.33	PC3	PASS
N2	15	15	DFT-16QAM	L	Edge_1RB_Left	20.25	PC3	PASS
N2	15	15	DFT-16QAM	L	Edge_1RB_Right	20.66	PC3	PASS
N2	15	15	DFT-QPSK	M	Outer_Full	20.78	PC3	PASS
N2	15	15	DFT-QPSK	M	Inner_Full	20.72	PC3	PASS
N2	15	15	DFT-QPSK	M	Edge_1RB_Left	20.80	PC3	PASS
N2	15	15	DFT-QPSK	M	Edge_1RB_Right	20.70	PC3	PASS
N2	15	15	DFT-16QAM	M	Outer_Full	20.79	PC3	PASS
N2	15	15	DFT-16QAM	M	Inner_Full	20.74	PC3	PASS
N2	15	15	DFT-16QAM	M	Edge_1RB_Left	20.20	PC3	PASS
N2	15	15	DFT-16QAM	M	Edge_1RB_Right	20.91	PC3	PASS
N2	15	15	DFT-QPSK	H	Outer_Full	20.22	PC3	PASS
N2	15	15	DFT-QPSK	H	Inner_Full	20.19	PC3	PASS
N2	15	15	DFT-QPSK	H	Edge_1RB_Left	20.86	PC3	PASS
N2	15	15	DFT-QPSK	H	Edge_1RB_Right	20.86	PC3	PASS
N2	15	15	DFT-16QAM	H	Outer_Full	20.28	PC3	PASS
N2	15	15	DFT-16QAM	H	Inner_Full	20.23	PC3	PASS
N2	15	15	DFT-16QAM	H	Edge_1RB_Left	20.12	PC3	PASS
N2	15	15	DFT-16QAM	H	Edge_1RB_Right	20.02	PC3	PASS
N2	15	20	DFT-QPSK	L	Outer_Full	21.11	PC3	PASS
N2	15	20	DFT-QPSK	L	Inner_Full	22.59	PC3	PASS
N2	15	20	DFT-QPSK	L	Edge_1RB_Left	21.23	PC3	PASS
N2	15	20	DFT-QPSK	L	Edge_1RB_Right	20.06	PC3	PASS
N2	15	20	DFT-16QAM	L	Outer_Full	20.13	PC3	PASS
N2	15	20	DFT-16QAM	L	Inner_Full	21.24	PC3	PASS
N2	15	20	DFT-16QAM	L	Edge_1RB_Left	20.41	PC3	PASS
N2	15	20	DFT-16QAM	L	Edge_1RB_Right	20.34	PC3	PASS

N2	15	20	DFT-QPSK	M	Outer_Full	20.85	PC3	PASS
N2	15	20	DFT-QPSK	M	Inner_Full	20.78	PC3	PASS
N2	15	20	DFT-QPSK	M	Edge_1RB_Left	20.05	PC3	PASS
N2	15	20	DFT-QPSK	M	Edge_1RB_Right	20.85	PC3	PASS
N2	15	20	DFT-16QAM	M	Outer_Full	20.84	PC3	PASS
N2	15	20	DFT-16QAM	M	Inner_Full	20.78	PC3	PASS
N2	15	20	DFT-16QAM	M	Edge_1RB_Left	20.23	PC3	PASS
N2	15	20	DFT-16QAM	M	Edge_1RB_Right	20.95	PC3	PASS
N2	15	20	DFT-QPSK	H	Outer_Full	20.53	PC3	PASS
N2	15	20	DFT-QPSK	H	Inner_Full	20.50	PC3	PASS
N2	15	20	DFT-QPSK	H	Edge_1RB_Left	20.42	PC3	PASS
N2	15	20	DFT-QPSK	H	Edge_1RB_Right	20.90	PC3	PASS
N2	15	20	DFT-16QAM	H	Outer_Full	20.50	PC3	PASS
N2	15	20	DFT-16QAM	H	Inner_Full	20.52	PC3	PASS
N2	15	20	DFT-16QAM	H	Edge_1RB_Left	20.65	PC3	PASS
N2	15	20	DFT-16QAM	H	Edge_1RB_Right	20.01	PC3	PASS

5G NR(P1):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N5	15	5	DFT-QPSK	L	Outer_Full	23.52	PC3	PASS
N5	15	5	DFT-QPSK	L	Inner_Full	24.53	PC3	PASS
N5	15	5	DFT-QPSK	L	Edge_1RB_Left	23.33	PC3	PASS
N5	15	5	DFT-QPSK	L	Edge_1RB_Right	23.47	PC3	PASS
N5	15	5	DFT-16QAM	L	Outer_Full	22.50	PC3	PASS
N5	15	5	DFT-16QAM	L	Inner_Full	23.53	PC3	PASS
N5	15	5	DFT-16QAM	L	Edge_1RB_Left	22.61	PC3	PASS
N5	15	5	DFT-16QAM	L	Edge_1RB_Right	22.66	PC3	PASS
N5	15	5	DFT-QPSK	M	Outer_Full	23.65	PC3	PASS
N5	15	5	DFT-QPSK	M	Inner_Full	24.64	PC3	PASS
N5	15	5	DFT-QPSK	M	Edge_1RB_Left	23.56	PC3	PASS
N5	15	5	DFT-QPSK	M	Edge_1RB_Right	23.51	PC3	PASS
N5	15	5	DFT-16QAM	M	Outer_Full	22.58	PC3	PASS
N5	15	5	DFT-16QAM	M	Inner_Full	23.65	PC3	PASS
N5	15	5	DFT-16QAM	M	Edge_1RB_Left	22.76	PC3	PASS
N5	15	5	DFT-16QAM	M	Edge_1RB_Right	22.77	PC3	PASS
N5	15	5	DFT-QPSK	H	Outer_Full	23.69	PC3	PASS
N5	15	5	DFT-QPSK	H	Inner_Full	24.74	PC3	PASS
N5	15	5	DFT-QPSK	H	Edge_1RB_Left	23.54	PC3	PASS
N5	15	5	DFT-QPSK	H	Edge_1RB_Right	23.49	PC3	PASS
N5	15	5	DFT-16QAM	H	Outer_Full	22.61	PC3	PASS

N5	15	5	DFT-16QAM	H	Inner_Full	23.76	PC3	PASS
N5	15	5	DFT-16QAM	H	Edge_1RB_Left	22.78	PC3	PASS
N5	15	5	DFT-16QAM	H	Edge_1RB_Right	22.75	PC3	PASS
N5	15	10	DFT-QPSK	L	Outer_Full	23.46	PC3	PASS
N5	15	10	DFT-QPSK	L	Inner_Full	24.49	PC3	PASS
N5	15	10	DFT-QPSK	L	Edge_1RB_Left	23.40	PC3	PASS
N5	15	10	DFT-QPSK	L	Edge_1RB_Right	23.46	PC3	PASS
N5	15	10	DFT-16QAM	L	Outer_Full	22.44	PC3	PASS
N5	15	10	DFT-16QAM	L	Inner_Full	23.48	PC3	PASS
N5	15	10	DFT-16QAM	L	Edge_1RB_Left	22.66	PC3	PASS
N5	15	10	DFT-16QAM	L	Edge_1RB_Right	22.75	PC3	PASS
N5	15	10	DFT-QPSK	M	Outer_Full	23.59	PC3	PASS
N5	15	10	DFT-QPSK	M	Inner_Full	24.58	PC3	PASS
N5	15	10	DFT-QPSK	M	Edge_1RB_Left	23.43	PC3	PASS
N5	15	10	DFT-QPSK	M	Edge_1RB_Right	23.55	PC3	PASS
N5	15	10	DFT-16QAM	M	Outer_Full	22.64	PC3	PASS
N5	15	10	DFT-16QAM	M	Inner_Full	23.56	PC3	PASS
N5	15	10	DFT-16QAM	M	Edge_1RB_Left	22.69	PC3	PASS
N5	15	10	DFT-16QAM	M	Edge_1RB_Right	22.83	PC3	PASS
N5	15	10	DFT-QPSK	H	Outer_Full	23.66	PC3	PASS
N5	15	10	DFT-QPSK	H	Inner_Full	24.65	PC3	PASS
N5	15	10	DFT-QPSK	H	Edge_1RB_Left	23.66	PC3	PASS
N5	15	10	DFT-QPSK	H	Edge_1RB_Right	23.56	PC3	PASS
N5	15	10	DFT-16QAM	H	Outer_Full	22.64	PC3	PASS
N5	15	10	DFT-16QAM	H	Inner_Full	23.63	PC3	PASS
N5	15	10	DFT-16QAM	H	Edge_1RB_Left	22.84	PC3	PASS
N5	15	10	DFT-16QAM	H	Edge_1RB_Right	22.84	PC3	PASS
N5	15	15	DFT-QPSK	L	Outer_Full	23.49	PC3	PASS
N5	15	15	DFT-QPSK	L	Inner_Full	24.47	PC3	PASS
N5	15	15	DFT-QPSK	L	Edge_1RB_Left	23.35	PC3	PASS
N5	15	15	DFT-QPSK	L	Edge_1RB_Right	23.54	PC3	PASS
N5	15	15	DFT-16QAM	L	Outer_Full	22.52	PC3	PASS
N5	15	15	DFT-16QAM	L	Inner_Full	23.52	PC3	PASS
N5	15	15	DFT-16QAM	L	Edge_1RB_Left	22.50	PC3	PASS
N5	15	15	DFT-16QAM	L	Edge_1RB_Right	22.88	PC3	PASS
N5	15	15	DFT-QPSK	M	Outer_Full	23.57	PC3	PASS
N5	15	15	DFT-QPSK	M	Inner_Full	24.53	PC3	PASS
N5	15	15	DFT-QPSK	M	Edge_1RB_Left	23.45	PC3	PASS
N5	15	15	DFT-QPSK	M	Edge_1RB_Right	23.49	PC3	PASS
N5	15	15	DFT-16QAM	M	Outer_Full	22.59	PC3	PASS
N5	15	15	DFT-16QAM	M	Inner_Full	23.59	PC3	PASS
N5	15	15	DFT-16QAM	M	Edge_1RB_Left	22.58	PC3	PASS

N5	15	15	DFT-16QAM	M	Edge_1RB_Right	22.66	PC3	PASS
N5	15	15	DFT-QPSK	H	Outer_Full	23.62	PC3	PASS
N5	15	15	DFT-QPSK	H	Inner_Full	24.65	PC3	PASS
N5	15	15	DFT-QPSK	H	Edge_1RB_Left	23.59	PC3	PASS
N5	15	15	DFT-QPSK	H	Edge_1RB_Right	23.56	PC3	PASS
N5	15	15	DFT-16QAM	H	Outer_Full	22.66	PC3	PASS
N5	15	15	DFT-16QAM	H	Inner_Full	23.72	PC3	PASS
N5	15	15	DFT-16QAM	H	Edge_1RB_Left	22.74	PC3	PASS
N5	15	15	DFT-16QAM	H	Edge_1RB_Right	22.89	PC3	PASS
N5	15	20	DFT-QPSK	L	Outer_Full	23.52	PC3	PASS
N5	15	20	DFT-QPSK	L	Inner_Full	24.83	PC3	PASS
N5	15	20	DFT-QPSK	L	Edge_1RB_Left	23.36	PC3	PASS
N5	15	20	DFT-QPSK	L	Edge_1RB_Right	23.54	PC3	PASS
N5	15	20	DFT-16QAM	L	Outer_Full	22.52	PC3	PASS
N5	15	20	DFT-16QAM	L	Inner_Full	23.54	PC3	PASS
N5	15	20	DFT-16QAM	L	Edge_1RB_Left	22.58	PC3	PASS
N5	15	20	DFT-16QAM	L	Edge_1RB_Right	22.81	PC3	PASS
N5	15	20	DFT-QPSK	M	Outer_Full	23.52	PC3	PASS
N5	15	20	DFT-QPSK	M	Inner_Full	24.61	PC3	PASS
N5	15	20	DFT-QPSK	M	Edge_1RB_Left	23.35	PC3	PASS
N5	15	20	DFT-QPSK	M	Edge_1RB_Right	23.53	PC3	PASS
N5	15	20	DFT-16QAM	M	Outer_Full	22.58	PC3	PASS
N5	15	20	DFT-16QAM	M	Inner_Full	23.63	PC3	PASS
N5	15	20	DFT-16QAM	M	Edge_1RB_Left	22.61	PC3	PASS
N5	15	20	DFT-16QAM	M	Edge_1RB_Right	22.73	PC3	PASS
N5	15	20	DFT-QPSK	H	Outer_Full	23.55	PC3	PASS
N5	15	20	DFT-QPSK	H	Inner_Full	24.62	PC3	PASS
N5	15	20	DFT-QPSK	H	Edge_1RB_Left	23.44	PC3	PASS
N5	15	20	DFT-QPSK	H	Edge_1RB_Right	23.44	PC3	PASS
N5	15	20	DFT-16QAM	H	Outer_Full	22.59	PC3	PASS
N5	15	20	DFT-16QAM	H	Inner_Full	23.63	PC3	PASS
N5	15	20	DFT-16QAM	H	Edge_1RB_Left	22.72	PC3	PASS
N5	15	20	DFT-16QAM	H	Edge_1RB_Right	22.76	PC3	PASS

5G NR(P1):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N25	15	5	DFT-QPSK	L	Outer_Full	21.38	PC3	PASS
N25	15	5	DFT-QPSK	L	Inner_Full	22.36	PC3	PASS
N25	15	5	DFT-QPSK	L	Edge_1RB_Left	21.26	PC3	PASS

N25	15	5	DFT-QPSK	L	Edge_1RB_Right	21.22	PC3	PASS
N25	15	5	DFT-16QAM	L	Outer_Full	20.40	PC3	PASS
N25	15	5	DFT-16QAM	L	Inner_Full	21.43	PC3	PASS
N25	15	5	DFT-16QAM	L	Edge_1RB_Left	20.41	PC3	PASS
N25	15	5	DFT-16QAM	L	Edge_1RB_Right	20.44	PC3	PASS
N25	15	5	DFT-QPSK	M	Outer_Full	20.85	PC3	PASS
N25	15	5	DFT-QPSK	M	Inner_Full	20.80	PC3	PASS
N25	15	5	DFT-QPSK	M	Edge_1RB_Left	20.84	PC3	PASS
N25	15	5	DFT-QPSK	M	Edge_1RB_Right	20.83	PC3	PASS
N25	15	5	DFT-16QAM	M	Outer_Full	20.82	PC3	PASS
N25	15	5	DFT-16QAM	M	Inner_Full	20.87	PC3	PASS
N25	15	5	DFT-16QAM	M	Edge_1RB_Left	20.98	PC3	PASS
N25	15	5	DFT-16QAM	M	Edge_1RB_Right	20.05	PC3	PASS
N25	15	5	DFT-QPSK	H	Outer_Full	20.14	PC3	PASS
N25	15	5	DFT-QPSK	H	Inner_Full	20.14	PC3	PASS
N25	15	5	DFT-QPSK	H	Edge_1RB_Left	20.97	PC3	PASS
N25	15	5	DFT-QPSK	H	Edge_1RB_Right	20.12	PC3	PASS
N25	15	5	DFT-16QAM	H	Outer_Full	20.03	PC3	PASS
N25	15	5	DFT-16QAM	H	Inner_Full	20.16	PC3	PASS
N25	15	5	DFT-16QAM	H	Edge_1RB_Left	20.28	PC3	PASS
N25	15	5	DFT-16QAM	H	Edge_1RB_Right	20.37	PC3	PASS
N25	15	10	DFT-QPSK	L	Outer_Full	21.31	PC3	PASS
N25	15	10	DFT-QPSK	L	Inner_Full	22.32	PC3	PASS
N25	15	10	DFT-QPSK	L	Edge_1RB_Left	21.17	PC3	PASS
N25	15	10	DFT-QPSK	L	Edge_1RB_Right	20.99	PC3	PASS
N25	15	10	DFT-16QAM	L	Outer_Full	20.35	PC3	PASS
N25	15	10	DFT-16QAM	L	Inner_Full	21.48	PC3	PASS
N25	15	10	DFT-16QAM	L	Edge_1RB_Left	20.44	PC3	PASS
N25	15	10	DFT-16QAM	L	Edge_1RB_Right	20.27	PC3	PASS
N25	15	10	DFT-QPSK	M	Outer_Full	20.32	PC3	PASS
N25	15	10	DFT-QPSK	M	Inner_Full	20.70	PC3	PASS
N25	15	10	DFT-QPSK	M	Edge_1RB_Left	20.77	PC3	PASS
N25	15	10	DFT-QPSK	M	Edge_1RB_Right	20.76	PC3	PASS
N25	15	10	DFT-16QAM	M	Outer_Full	20.84	PC3	PASS
N25	15	10	DFT-16QAM	M	Inner_Full	20.78	PC3	PASS
N25	15	10	DFT-16QAM	M	Edge_1RB_Left	20.02	PC3	PASS
N25	15	10	DFT-16QAM	M	Edge_1RB_Right	20.03	PC3	PASS
N25	15	10	DFT-QPSK	H	Outer_Full	20.93	PC3	PASS
N25	15	10	DFT-QPSK	H	Inner_Full	20.88	PC3	PASS
N25	15	10	DFT-QPSK	H	Edge_1RB_Left	20.95	PC3	PASS
N25	15	10	DFT-QPSK	H	Edge_1RB_Right	20.10	PC3	PASS
N25	15	10	DFT-16QAM	H	Outer_Full	20.92	PC3	PASS

N25	15	10	DFT-16QAM	H	Inner_Full	20.95	PC3	PASS
N25	15	10	DFT-16QAM	H	Edge_1RB_Left	20.10	PC3	PASS
N25	15	10	DFT-16QAM	H	Edge_1RB_Right	20.38	PC3	PASS
N25	15	15	DFT-QPSK	L	Outer_Full	21.19	PC3	PASS
N25	15	15	DFT-QPSK	L	Inner_Full	22.20	PC3	PASS
N25	15	15	DFT-QPSK	L	Edge_1RB_Left	21.16	PC3	PASS
N25	15	15	DFT-QPSK	L	Edge_1RB_Right	20.49	PC3	PASS
N25	15	15	DFT-16QAM	L	Outer_Full	20.23	PC3	PASS
N25	15	15	DFT-16QAM	L	Inner_Full	21.33	PC3	PASS
N25	15	15	DFT-16QAM	L	Edge_1RB_Left	20.28	PC3	PASS
N25	15	15	DFT-16QAM	L	Edge_1RB_Right	20.78	PC3	PASS
N25	15	15	DFT-QPSK	M	Outer_Full	20.76	PC3	PASS
N25	15	15	DFT-QPSK	M	Inner_Full	20.75	PC3	PASS
N25	15	15	DFT-QPSK	M	Edge_1RB_Left	20.69	PC3	PASS
N25	15	15	DFT-QPSK	M	Edge_1RB_Right	20.68	PC3	PASS
N25	15	15	DFT-16QAM	M	Outer_Full	20.79	PC3	PASS
N25	15	15	DFT-16QAM	M	Inner_Full	20.79	PC3	PASS
N25	15	15	DFT-16QAM	M	Edge_1RB_Left	20.02	PC3	PASS
N25	15	15	DFT-16QAM	M	Edge_1RB_Right	20.79	PC3	PASS
N25	15	15	DFT-QPSK	H	Outer_Full	20.99	PC3	PASS
N25	15	15	DFT-QPSK	H	Inner_Full	20.87	PC3	PASS
N25	15	15	DFT-QPSK	H	Edge_1RB_Left	20.25	PC3	PASS
N25	15	15	DFT-QPSK	H	Edge_1RB_Right	20.08	PC3	PASS
N25	15	15	DFT-16QAM	H	Outer_Full	20.04	PC3	PASS
N25	15	15	DFT-16QAM	H	Inner_Full	20.94	PC3	PASS
N25	15	15	DFT-16QAM	H	Edge_1RB_Left	20.51	PC3	PASS
N25	15	15	DFT-16QAM	H	Edge_1RB_Right	20.36	PC3	PASS
N25	15	20	DFT-QPSK	L	Outer_Full	21.06	PC3	PASS
N25	15	20	DFT-QPSK	L	Inner_Full	22.45	PC3	PASS
N25	15	20	DFT-QPSK	L	Edge_1RB_Left	21.24	PC3	PASS
N25	15	20	DFT-QPSK	L	Edge_1RB_Right	20.02	PC3	PASS
N25	15	20	DFT-16QAM	L	Outer_Full	20.13	PC3	PASS
N25	15	20	DFT-16QAM	L	Inner_Full	21.17	PC3	PASS
N25	15	20	DFT-16QAM	L	Edge_1RB_Left	20.49	PC3	PASS
N25	15	20	DFT-16QAM	L	Edge_1RB_Right	20.29	PC3	PASS
N25	15	20	DFT-QPSK	M	Outer_Full	20.75	PC3	PASS
N25	15	20	DFT-QPSK	M	Inner_Full	20.77	PC3	PASS
N25	15	20	DFT-QPSK	M	Edge_1RB_Left	20.67	PC3	PASS
N25	15	20	DFT-QPSK	M	Edge_1RB_Right	20.57	PC3	PASS
N25	15	20	DFT-16QAM	M	Outer_Full	20.76	PC3	PASS
N25	15	20	DFT-16QAM	M	Inner_Full	20.80	PC3	PASS
N25	15	20	DFT-16QAM	M	Edge_1RB_Left	20.03	PC3	PASS

N25	15	20	DFT-16QAM	M	Edge_1RB_Right	20.69	PC3	PASS
N25	15	20	DFT-QPSK	H	Outer_Full	20.15	PC3	PASS
N25	15	20	DFT-QPSK	H	Inner_Full	20.06	PC3	PASS
N25	15	20	DFT-QPSK	H	Edge_1RB_Left	20.89	PC3	PASS
N25	15	20	DFT-QPSK	H	Edge_1RB_Right	20.20	PC3	PASS
N25	15	20	DFT-16QAM	H	Outer_Full	20.11	PC3	PASS
N25	15	20	DFT-16QAM	H	Inner_Full	20.03	PC3	PASS
N25	15	20	DFT-16QAM	H	Edge_1RB_Left	20.22	PC3	PASS
N25	15	20	DFT-16QAM	H	Edge_1RB_Right	20.36	PC3	PASS

5G NR(P1):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N41	30	10	CP-QPSK	L	Outer_Full	22.62	PC2	PASS
N41	30	10	CP-QPSK	L	Edge_1RB_Left	22.33	PC2	PASS
N41	30	10	CP-QPSK	L	Inner_Full	24.20	PC2	PASS
N41	30	10	CP-QPSK	L	Edge_1RB_Right	22.29	PC2	PASS
N41	30	10	CP-16QAM	L	Outer_Full	22.56	PC2	PASS
N41	30	10	CP-16QAM	L	Edge_1RB_Left	22.33	PC2	PASS
N41	30	10	CP-16QAM	L	Inner_Full	23.72	PC2	PASS
N41	30	10	CP-16QAM	L	Edge_1RB_Right	22.34	PC2	PASS
N41	30	10	CP-QPSK	M	Outer_Full	22.40	PC2	PASS
N41	30	10	CP-QPSK	M	Edge_1RB_Left	21.89	PC2	PASS
N41	30	10	CP-QPSK	M	Inner_Full	23.92	PC2	PASS
N41	30	10	CP-QPSK	M	Edge_1RB_Right	22.30	PC2	PASS
N41	30	10	CP-16QAM	M	Outer_Full	22.39	PC2	PASS
N41	30	10	CP-16QAM	M	Edge_1RB_Left	22.14	PC2	PASS
N41	30	10	CP-16QAM	M	Inner_Full	23.69	PC2	PASS
N41	30	10	CP-16QAM	M	Edge_1RB_Right	22.32	PC2	PASS
N41	30	10	CP-QPSK	H	Outer_Full	22.88	PC2	PASS
N41	30	10	CP-QPSK	H	Edge_1RB_Left	22.24	PC2	PASS
N41	30	10	CP-QPSK	H	Inner_Full	24.30	PC2	PASS
N41	30	10	CP-QPSK	H	Edge_1RB_Right	22.37	PC2	PASS
N41	30	10	CP-16QAM	H	Outer_Full	22.69	PC2	PASS
N41	30	10	DFT-QPSK	L	Outer_Full	24.68	PC2	PASS
N41	30	10	DFT-QPSK	L	Inner_Full	25.88	PC2	PASS
N41	30	10	DFT-QPSK	L	Edge_1RB_Left	22.35	PC2	PASS
N41	30	10	DFT-QPSK	L	Edge_1RB_Right	22.34	PC2	PASS
N41	30	10	DFT-16QAM	L	Outer_Full	23.84	PC2	PASS
N41	30	10	DFT-16QAM	L	Inner_Full	24.95	PC2	PASS

N41	30	10	DFT-16QAM	L	Edge_1RB_Left	22.45	PC2	PASS
N41	30	10	DFT-16QAM	L	Edge_1RB_Right	22.47	PC2	PASS
N41	30	10	DFT-QPSK	M	Outer_Full	24.56	PC2	PASS
N41	30	10	DFT-QPSK	M	Inner_Full	25.63	PC2	PASS
N41	30	10	DFT-QPSK	M	Edge_1RB_Left	22.02	PC2	PASS
N41	30	10	DFT-QPSK	M	Edge_1RB_Right	22.30	PC2	PASS
N41	30	10	DFT-16QAM	M	Outer_Full	23.75	PC2	PASS
N41	30	10	DFT-16QAM	M	Inner_Full	24.61	PC2	PASS
N41	30	10	DFT-16QAM	M	Edge_1RB_Left	22.03	PC2	PASS
N41	30	10	DFT-16QAM	M	Edge_1RB_Right	22.43	PC2	PASS
N41	30	10	DFT-QPSK	H	Outer_Full	24.80	PC2	PASS
N41	30	10	DFT-QPSK	H	Inner_Full	25.91	PC2	PASS
N41	30	10	DFT-QPSK	H	Edge_1RB_Left	22.36	PC2	PASS
N41	30	10	DFT-QPSK	H	Edge_1RB_Right	22.45	PC2	PASS
N41	30	10	DFT-16QAM	H	Outer_Full	23.99	PC2	PASS
N41	30	10	DFT-16QAM	H	Inner_Full	24.81	PC2	PASS
N41	30	10	DFT-16QAM	H	Edge_1RB_Left	22.47	PC2	PASS
N41	30	10	DFT-16QAM	H	Edge_1RB_Right	22.50	PC2	PASS
N41	30	15	DFT-QPSK	L	Outer_Full	24.67	PC2	PASS
N41	30	15	DFT-QPSK	L	Inner_Full	25.71	PC2	PASS
N41	30	15	DFT-QPSK	L	Edge_1RB_Left	22.23	PC2	PASS
N41	30	15	DFT-QPSK	L	Edge_1RB_Right	22.09	PC2	PASS
N41	30	15	DFT-16QAM	L	Outer_Full	23.75	PC2	PASS
N41	30	15	DFT-16QAM	L	Inner_Full	24.75	PC2	PASS
N41	30	15	DFT-16QAM	L	Edge_1RB_Left	22.41	PC2	PASS
N41	30	15	DFT-16QAM	L	Edge_1RB_Right	22.24	PC2	PASS
N41	30	15	DFT-QPSK	M	Outer_Full	24.52	PC2	PASS
N41	30	15	DFT-QPSK	M	Inner_Full	25.57	PC2	PASS
N41	30	15	DFT-QPSK	M	Edge_1RB_Left	21.86	PC2	PASS
N41	30	15	DFT-QPSK	M	Edge_1RB_Right	22.21	PC2	PASS
N41	30	15	DFT-16QAM	M	Outer_Full	23.60	PC2	PASS
N41	30	15	DFT-16QAM	M	Inner_Full	24.64	PC2	PASS
N41	30	15	DFT-16QAM	M	Edge_1RB_Left	22.42	PC2	PASS
N41	30	15	DFT-16QAM	M	Edge_1RB_Right	22.34	PC2	PASS
N41	30	15	DFT-QPSK	H	Outer_Full	24.72	PC2	PASS
N41	30	15	DFT-QPSK	H	Inner_Full	25.73	PC2	PASS
N41	30	15	DFT-QPSK	H	Edge_1RB_Left	22.22	PC2	PASS
N41	30	15	DFT-QPSK	H	Edge_1RB_Right	22.37	PC2	PASS
N41	30	15	DFT-16QAM	H	Outer_Full	23.83	PC2	PASS
N41	30	15	DFT-16QAM	H	Inner_Full	24.78	PC2	PASS
N41	30	15	DFT-16QAM	H	Edge_1RB_Left	22.71	PC2	PASS
N41	30	15	DFT-16QAM	H	Edge_1RB_Right	22.92	PC2	PASS

N41	30	20	DFT-QPSK	L	Outer_Full	24.60	PC2	PASS
N41	30	20	DFT-QPSK	L	Inner_Full	25.67	PC2	PASS
N41	30	20	DFT-QPSK	L	Edge_1RB_Left	22.16	PC2	PASS
N41	30	20	DFT-QPSK	L	Edge_1RB_Right	22.01	PC2	PASS
N41	30	20	DFT-16QAM	L	Outer_Full	23.74	PC2	PASS
N41	30	20	DFT-16QAM	L	Inner_Full	24.83	PC2	PASS
N41	30	20	DFT-16QAM	L	Edge_1RB_Left	22.36	PC2	PASS
N41	30	20	DFT-16QAM	L	Edge_1RB_Right	21.93	PC2	PASS
N41	30	20	DFT-QPSK	M	Outer_Full	24.56	PC2	PASS
N41	30	20	DFT-QPSK	M	Inner_Full	25.63	PC2	PASS
N41	30	20	DFT-QPSK	M	Edge_1RB_Left	21.88	PC2	PASS
N41	30	20	DFT-QPSK	M	Edge_1RB_Right	22.11	PC2	PASS
N41	30	20	DFT-16QAM	M	Outer_Full	23.61	PC2	PASS
N41	30	20	DFT-16QAM	M	Inner_Full	24.58	PC2	PASS
N41	30	20	DFT-16QAM	M	Edge_1RB_Left	21.80	PC2	PASS
N41	30	20	DFT-16QAM	M	Edge_1RB_Right	22.30	PC2	PASS
N41	30	20	DFT-QPSK	H	Outer_Full	24.78	PC2	PASS
N41	30	20	DFT-QPSK	H	Inner_Full	25.75	PC2	PASS
N41	30	20	DFT-QPSK	H	Edge_1RB_Left	22.19	PC2	PASS
N41	30	20	DFT-QPSK	H	Edge_1RB_Right	22.45	PC2	PASS
N41	30	20	DFT-16QAM	H	Outer_Full	23.84	PC2	PASS
N41	30	20	DFT-16QAM	H	Inner_Full	24.86	PC2	PASS
N41	30	20	DFT-16QAM	H	Edge_1RB_Left	22.12	PC2	PASS
N41	30	20	DFT-16QAM	H	Edge_1RB_Right	22.31	PC2	PASS
N41	30	30	DFT-QPSK	L	Outer_Full	24.62	PC2	PASS
N41	30	30	DFT-QPSK	L	Inner_Full	25.52	PC2	PASS
N41	30	30	DFT-QPSK	L	Edge_1RB_Left	22.38	PC2	PASS
N41	30	30	DFT-QPSK	L	Edge_1RB_Right	22.22	PC2	PASS
N41	30	30	DFT-16QAM	L	Outer_Full	23.70	PC2	PASS
N41	30	30	DFT-16QAM	L	Inner_Full	24.63	PC2	PASS
N41	30	30	DFT-16QAM	L	Edge_1RB_Left	22.81	PC2	PASS
N41	30	30	DFT-16QAM	L	Edge_1RB_Right	22.49	PC2	PASS
N41	30	30	DFT-QPSK	M	Outer_Full	24.48	PC2	PASS
N41	30	30	DFT-QPSK	M	Inner_Full	25.49	PC2	PASS
N41	30	30	DFT-QPSK	M	Edge_1RB_Left	21.80	PC2	PASS
N41	30	30	DFT-QPSK	M	Edge_1RB_Right	21.99	PC2	PASS
N41	30	30	DFT-16QAM	M	Outer_Full	23.51	PC2	PASS
N41	30	30	DFT-16QAM	M	Inner_Full	24.51	PC2	PASS
N41	30	30	DFT-16QAM	M	Edge_1RB_Left	22.33	PC2	PASS
N41	30	30	DFT-16QAM	M	Edge_1RB_Right	22.53	PC2	PASS
N41	30	30	DFT-QPSK	H	Outer_Full	24.71	PC2	PASS
N41	30	30	DFT-QPSK	H	Inner_Full	25.63	PC2	PASS

N41	30	30	DFT-QPSK	H	Edge_1RB_Left	22.06	PC2	PASS
N41	30	30	DFT-QPSK	H	Edge_1RB_Right	22.29	PC2	PASS
N41	30	30	DFT-16QAM	H	Outer_Full	23.71	PC2	PASS
N41	30	30	DFT-16QAM	H	Inner_Full	24.68	PC2	PASS
N41	30	30	DFT-16QAM	H	Edge_1RB_Left	22.52	PC2	PASS
N41	30	30	DFT-16QAM	H	Edge_1RB_Right	22.79	PC2	PASS
N41	30	40	DFT-QPSK	L	Outer_Full	24.67	PC2	PASS
N41	30	40	DFT-QPSK	L	Inner_Full	25.50	PC2	PASS
N41	30	40	DFT-QPSK	L	Edge_1RB_Left	22.26	PC2	PASS
N41	30	40	DFT-QPSK	L	Edge_1RB_Right	22.29	PC2	PASS
N41	30	40	DFT-16QAM	L	Outer_Full	23.71	PC2	PASS
N41	30	40	DFT-16QAM	L	Inner_Full	24.53	PC2	PASS
N41	30	40	DFT-16QAM	L	Edge_1RB_Left	22.45	PC2	PASS
N41	30	40	DFT-16QAM	L	Edge_1RB_Right	22.26	PC2	PASS
N41	30	40	DFT-QPSK	M	Outer_Full	24.44	PC2	PASS
N41	30	40	DFT-QPSK	M	Inner_Full	25.44	PC2	PASS
N41	30	40	DFT-QPSK	M	Edge_1RB_Left	22.11	PC2	PASS
N41	30	40	DFT-QPSK	M	Edge_1RB_Right	21.80	PC2	PASS
N41	30	40	DFT-16QAM	M	Outer_Full	23.50	PC2	PASS
N41	30	40	DFT-16QAM	M	Inner_Full	24.49	PC2	PASS
N41	30	40	DFT-16QAM	M	Edge_1RB_Left	22.24	PC2	PASS
N41	30	40	DFT-16QAM	M	Edge_1RB_Right	21.71	PC2	PASS
N41	30	40	DFT-QPSK	H	Outer_Full	24.62	PC2	PASS
N41	30	40	DFT-QPSK	H	Inner_Full	25.60	PC2	PASS
N41	30	40	DFT-QPSK	H	Edge_1RB_Left	21.85	PC2	PASS
N41	30	40	DFT-QPSK	H	Edge_1RB_Right	22.27	PC2	PASS
N41	30	40	DFT-16QAM	H	Outer_Full	23.64	PC2	PASS
N41	30	40	DFT-16QAM	H	Inner_Full	24.68	PC2	PASS
N41	30	40	DFT-16QAM	H	Edge_1RB_Left	21.73	PC2	PASS
N41	30	40	DFT-16QAM	H	Edge_1RB_Right	22.51	PC2	PASS
N41	30	60	DFT-QPSK	L	Outer_Full	24.54	PC2	PASS
N41	30	60	DFT-QPSK	L	Inner_Full	25.58	PC2	PASS
N41	30	60	DFT-QPSK	L	Edge_1RB_Left	22.15	PC2	PASS
N41	30	60	DFT-QPSK	L	Edge_1RB_Right	21.83	PC2	PASS
N41	30	60	DFT-16QAM	L	Outer_Full	23.57	PC2	PASS
N41	30	60	DFT-16QAM	L	Inner_Full	24.59	PC2	PASS
N41	30	60	DFT-16QAM	L	Edge_1RB_Left	22.29	PC2	PASS
N41	30	60	DFT-16QAM	L	Edge_1RB_Right	22.07	PC2	PASS
N41	30	60	DFT-QPSK	M	Outer_Full	24.38	PC2	PASS
N41	30	60	DFT-QPSK	M	Inner_Full	25.43	PC2	PASS
N41	30	60	DFT-QPSK	M	Edge_1RB_Left	22.19	PC2	PASS
N41	30	60	DFT-QPSK	M	Edge_1RB_Right	21.56	PC2	PASS

N41	30	60	DFT-16QAM	M	Outer_Full	23.37	PC2	PASS
N41	30	60	DFT-16QAM	M	Inner_Full	24.42	PC2	PASS
N41	30	60	DFT-16QAM	M	Edge_1RB_Left	22.73	PC2	PASS
N41	30	60	DFT-16QAM	M	Edge_1RB_Right	21.77	PC2	PASS
N41	30	60	DFT-QPSK	H	Outer_Full	24.47	PC2	PASS
N41	30	60	DFT-QPSK	H	Inner_Full	25.47	PC2	PASS
N41	30	60	DFT-QPSK	H	Edge_1RB_Left	21.85	PC2	PASS
N41	30	60	DFT-QPSK	H	Edge_1RB_Right	22.14	PC2	PASS
N41	30	60	DFT-16QAM	H	Outer_Full	23.45	PC2	PASS
N41	30	60	DFT-16QAM	H	Inner_Full	24.49	PC2	PASS
N41	30	60	DFT-16QAM	H	Edge_1RB_Left	22.37	PC2	PASS
N41	30	60	DFT-16QAM	H	Edge_1RB_Right	22.69	PC2	PASS
N41	30	80	DFT-QPSK	L	Outer_Full	24.65	PC2	PASS
N41	30	80	DFT-QPSK	L	Inner_Full	25.63	PC2	PASS
N41	30	80	DFT-QPSK	L	Edge_1RB_Left	22.31	PC2	PASS
N41	30	80	DFT-QPSK	L	Edge_1RB_Right	22.03	PC2	PASS
N41	30	80	DFT-16QAM	L	Outer_Full	23.66	PC2	PASS
N41	30	80	DFT-16QAM	L	Inner_Full	24.67	PC2	PASS
N41	30	80	DFT-16QAM	L	Edge_1RB_Left	22.32	PC2	PASS
N41	30	80	DFT-16QAM	L	Edge_1RB_Right	22.32	PC2	PASS
N41	30	80	DFT-QPSK	M	Outer_Full	24.55	PC2	PASS
N41	30	80	DFT-QPSK	M	Inner_Full	25.54	PC2	PASS
N41	30	80	DFT-QPSK	M	Edge_1RB_Left	21.99	PC2	PASS
N41	30	80	DFT-QPSK	M	Edge_1RB_Right	21.93	PC2	PASS
N41	30	80	DFT-16QAM	M	Outer_Full	23.52	PC2	PASS
N41	30	80	DFT-16QAM	M	Inner_Full	24.56	PC2	PASS
N41	30	80	DFT-16QAM	M	Edge_1RB_Left	22.30	PC2	PASS
N41	30	80	DFT-16QAM	M	Edge_1RB_Right	22.26	PC2	PASS
N41	30	80	DFT-QPSK	H	Outer_Full	24.48	PC2	PASS
N41	30	80	DFT-QPSK	H	Inner_Full	25.51	PC2	PASS
N41	30	80	DFT-QPSK	H	Edge_1RB_Left	21.89	PC2	PASS
N41	30	80	DFT-QPSK	H	Edge_1RB_Right	22.24	PC2	PASS
N41	30	80	DFT-16QAM	H	Outer_Full	23.50	PC2	PASS
N41	30	80	DFT-16QAM	H	Inner_Full	24.54	PC2	PASS
N41	30	80	DFT-16QAM	H	Edge_1RB_Left	21.82	PC2	PASS
N41	30	80	DFT-16QAM	H	Edge_1RB_Right	22.55	PC2	PASS
N41	30	100	DFT-QPSK	L	Outer_Full	24.60	PC2	PASS
N41	30	100	DFT-QPSK	L	Inner_Full	25.96	PC2	PASS
N41	30	100	DFT-QPSK	L	Edge_1RB_Left	22.15	PC2	PASS
N41	30	100	DFT-QPSK	L	Edge_1RB_Right	22.00	PC2	PASS
N41	30	100	DFT-16QAM	L	Outer_Full	23.66	PC2	PASS
N41	30	100	DFT-16QAM	L	Inner_Full	24.74	PC2	PASS

N41	30	100	DFT-16QAM	L	Edge_1RB_Left	22.32	PC2	PASS
N41	30	100	DFT-16QAM	L	Edge_1RB_Right	22.21	PC2	PASS
N41	30	100	DFT-QPSK	M	Outer_Full	24.47	PC2	PASS
N41	30	100	DFT-QPSK	M	Inner_Full	25.47	PC2	PASS
N41	30	100	DFT-QPSK	M	Edge_1RB_Left	21.74	PC2	PASS
N41	30	100	DFT-QPSK	M	Edge_1RB_Right	21.70	PC2	PASS
N41	30	100	DFT-16QAM	M	Outer_Full	23.54	PC2	PASS
N41	30	100	DFT-16QAM	M	Inner_Full	24.60	PC2	PASS
N41	30	100	DFT-16QAM	M	Edge_1RB_Left	22.34	PC2	PASS
N41	30	100	DFT-16QAM	M	Edge_1RB_Right	22.22	PC2	PASS
N41	30	100	DFT-QPSK	H	Outer_Full	24.50	PC2	PASS
N41	30	100	DFT-QPSK	H	Inner_Full	25.35	PC2	PASS
N41	30	100	DFT-QPSK	H	Edge_1RB_Left	21.77	PC2	PASS
N41	30	100	DFT-QPSK	H	Edge_1RB_Right	22.03	PC2	PASS
N41	30	100	DFT-16QAM	H	Outer_Full	23.51	PC2	PASS
N41	30	100	DFT-16QAM	H	Inner_Full	24.42	PC2	PASS
N41	30	100	DFT-16QAM	H	Edge_1RB_Left	22.23	PC2	PASS
N41	30	100	DFT-16QAM	H	Edge_1RB_Right	22.48	PC2	PASS

5G NR(P1):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N66	15	5	DFT-QPSK	L	Outer_Full	22.55	PC3	PASS
N66	15	5	DFT-QPSK	L	Inner_Full	23.44	PC3	PASS
N66	15	5	DFT-QPSK	L	Edge_1RB_Left	22.48	PC3	PASS
N66	15	5	DFT-QPSK	L	Edge_1RB_Right	22.50	PC3	PASS
N66	15	5	DFT-16QAM	L	Outer_Full	21.52	PC3	PASS
N66	15	5	DFT-16QAM	L	Inner_Full	22.66	PC3	PASS
N66	15	5	DFT-16QAM	L	Edge_1RB_Left	21.86	PC3	PASS
N66	15	5	DFT-16QAM	L	Edge_1RB_Right	21.91	PC3	PASS
N66	15	5	DFT-QPSK	M	Outer_Full	22.44	PC3	PASS
N66	15	5	DFT-QPSK	M	Inner_Full	23.34	PC3	PASS
N66	15	5	DFT-QPSK	M	Edge_1RB_Left	22.25	PC3	PASS
N66	15	5	DFT-QPSK	M	Edge_1RB_Right	22.44	PC3	PASS
N66	15	5	DFT-16QAM	M	Outer_Full	21.30	PC3	PASS
N66	15	5	DFT-16QAM	M	Inner_Full	22.41	PC3	PASS
N66	15	5	DFT-16QAM	M	Edge_1RB_Left	21.73	PC3	PASS
N66	15	5	DFT-16QAM	M	Edge_1RB_Right	21.53	PC3	PASS
N66	15	5	DFT-QPSK	H	Outer_Full	21.75	PC3	PASS
N66	15	5	DFT-QPSK	H	Inner_Full	22.73	PC3	PASS

N66	15	5	DFT-QPSK	H	Edge_1RB_Left	21.68	PC3	PASS
N66	15	5	DFT-QPSK	H	Edge_1RB_Right	21.79	PC3	PASS
N66	15	5	DFT-16QAM	H	Outer_Full	20.70	PC3	PASS
N66	15	5	DFT-16QAM	H	Inner_Full	21.72	PC3	PASS
N66	15	5	DFT-16QAM	H	Edge_1RB_Left	21.04	PC3	PASS
N66	15	5	DFT-16QAM	H	Edge_1RB_Right	21.14	PC3	PASS
N66	15	10	DFT-QPSK	L	Outer_Full	22.80	PC3	PASS
N66	15	10	DFT-QPSK	L	Inner_Full	23.68	PC3	PASS
N66	15	10	DFT-QPSK	L	Edge_1RB_Left	22.50	PC3	PASS
N66	15	10	DFT-QPSK	L	Edge_1RB_Right	22.79	PC3	PASS
N66	15	10	DFT-16QAM	L	Outer_Full	21.82	PC3	PASS
N66	15	10	DFT-16QAM	L	Inner_Full	22.78	PC3	PASS
N66	15	10	DFT-16QAM	L	Edge_1RB_Left	21.84	PC3	PASS
N66	15	10	DFT-16QAM	L	Edge_1RB_Right	22.00	PC3	PASS
N66	15	10	DFT-QPSK	M	Outer_Full	22.47	PC3	PASS
N66	15	10	DFT-QPSK	M	Inner_Full	23.43	PC3	PASS
N66	15	10	DFT-QPSK	M	Edge_1RB_Left	22.39	PC3	PASS
N66	15	10	DFT-QPSK	M	Edge_1RB_Right	22.58	PC3	PASS
N66	15	10	DFT-16QAM	M	Outer_Full	21.50	PC3	PASS
N66	15	10	DFT-16QAM	M	Inner_Full	22.41	PC3	PASS
N66	15	10	DFT-16QAM	M	Edge_1RB_Left	21.48	PC3	PASS
N66	15	10	DFT-16QAM	M	Edge_1RB_Right	21.64	PC3	PASS
N66	15	10	DFT-QPSK	H	Outer_Full	21.69	PC3	PASS
N66	15	10	DFT-QPSK	H	Inner_Full	22.69	PC3	PASS
N66	15	10	DFT-QPSK	H	Edge_1RB_Left	21.63	PC3	PASS
N66	15	10	DFT-QPSK	H	Edge_1RB_Right	21.70	PC3	PASS
N66	15	10	DFT-16QAM	H	Outer_Full	20.69	PC3	PASS
N66	15	10	DFT-16QAM	H	Inner_Full	21.61	PC3	PASS
N66	15	10	DFT-16QAM	H	Edge_1RB_Left	20.68	PC3	PASS
N66	15	10	DFT-16QAM	H	Edge_1RB_Right	21.23	PC3	PASS
N66	15	15	DFT-QPSK	L	Outer_Full	22.59	PC3	PASS
N66	15	15	DFT-QPSK	L	Inner_Full	23.50	PC3	PASS
N66	15	15	DFT-QPSK	L	Edge_1RB_Left	22.34	PC3	PASS
N66	15	15	DFT-QPSK	L	Edge_1RB_Right	22.64	PC3	PASS
N66	15	15	DFT-16QAM	L	Outer_Full	21.64	PC3	PASS
N66	15	15	DFT-16QAM	L	Inner_Full	22.65	PC3	PASS
N66	15	15	DFT-16QAM	L	Edge_1RB_Left	21.52	PC3	PASS
N66	15	15	DFT-16QAM	L	Edge_1RB_Right	21.78	PC3	PASS
N66	15	15	DFT-QPSK	M	Outer_Full	22.25	PC3	PASS
N66	15	15	DFT-QPSK	M	Inner_Full	23.24	PC3	PASS
N66	15	15	DFT-QPSK	M	Edge_1RB_Left	22.17	PC3	PASS
N66	15	15	DFT-QPSK	M	Edge_1RB_Right	22.36	PC3	PASS

N66	15	15	DFT-16QAM	M	Outer_Full	21.29	PC3	PASS
N66	15	15	DFT-16QAM	M	Inner_Full	22.31	PC3	PASS
N66	15	15	DFT-16QAM	M	Edge_1RB_Left	21.30	PC3	PASS
N66	15	15	DFT-16QAM	M	Edge_1RB_Right	21.78	PC3	PASS
N66	15	15	DFT-QPSK	H	Outer_Full	21.53	PC3	PASS
N66	15	15	DFT-QPSK	H	Inner_Full	22.50	PC3	PASS
N66	15	15	DFT-QPSK	H	Edge_1RB_Left	21.61	PC3	PASS
N66	15	15	DFT-QPSK	H	Edge_1RB_Right	21.64	PC3	PASS
N66	15	15	DFT-16QAM	H	Outer_Full	20.56	PC3	PASS
N66	15	15	DFT-16QAM	H	Inner_Full	21.54	PC3	PASS
N66	15	15	DFT-16QAM	H	Edge_1RB_Left	20.85	PC3	PASS
N66	15	15	DFT-16QAM	H	Edge_1RB_Right	20.94	PC3	PASS
N66	15	20	DFT-QPSK	L	Outer_Full	22.44	PC3	PASS
N66	15	20	DFT-QPSK	L	Inner_Full	23.75	PC3	PASS
N66	15	20	DFT-QPSK	L	Edge_1RB_Left	22.23	PC3	PASS
N66	15	20	DFT-QPSK	L	Edge_1RB_Right	22.23	PC3	PASS
N66	15	20	DFT-16QAM	L	Outer_Full	21.44	PC3	PASS
N66	15	20	DFT-16QAM	L	Inner_Full	22.48	PC3	PASS
N66	15	20	DFT-16QAM	L	Edge_1RB_Left	21.42	PC3	PASS
N66	15	20	DFT-16QAM	L	Edge_1RB_Right	21.64	PC3	PASS
N66	15	20	DFT-QPSK	M	Outer_Full	22.26	PC3	PASS
N66	15	20	DFT-QPSK	M	Inner_Full	23.27	PC3	PASS
N66	15	20	DFT-QPSK	M	Edge_1RB_Left	22.18	PC3	PASS
N66	15	20	DFT-QPSK	M	Edge_1RB_Right	22.32	PC3	PASS
N66	15	20	DFT-16QAM	M	Outer_Full	21.28	PC3	PASS
N66	15	20	DFT-16QAM	M	Inner_Full	22.30	PC3	PASS
N66	15	20	DFT-16QAM	M	Edge_1RB_Left	21.26	PC3	PASS
N66	15	20	DFT-16QAM	M	Edge_1RB_Right	21.50	PC3	PASS
N66	15	20	DFT-QPSK	H	Outer_Full	21.63	PC3	PASS
N66	15	20	DFT-QPSK	H	Inner_Full	22.59	PC3	PASS
N66	15	20	DFT-QPSK	H	Edge_1RB_Left	21.89	PC3	PASS
N66	15	20	DFT-QPSK	H	Edge_1RB_Right	21.57	PC3	PASS
N66	15	20	DFT-16QAM	H	Outer_Full	20.64	PC3	PASS
N66	15	20	DFT-16QAM	H	Inner_Full	21.55	PC3	PASS
N66	15	20	DFT-16QAM	H	Edge_1RB_Left	21.34	PC3	PASS
N66	15	20	DFT-16QAM	H	Edge_1RB_Right	21.07	PC3	PASS

5G NR(P1):

Band	SCS	Bandw	Modulation	Chan	RB Config	Power	Power	Verdict
------	-----	-------	------------	------	-----------	-------	-------	---------

		idth		nel		(dBm)	Class	
N71	15	5	CP-QPSK	L	Outer_Full	21.96	PC3	PASS
N71	15	5	CP-QPSK	L	Edge_1RB_Left	21.73	PC3	PASS
N71	15	5	CP-QPSK	L	Inner_Full	23.36	PC3	PASS
N71	15	5	CP-QPSK	L	Edge_1RB_Right	21.84	PC3	PASS
N71	15	5	CP-16QAM	L	Outer_Full	21.97	PC3	PASS
N71	15	5	CP-16QAM	L	Edge_1RB_Left	22.25	PC3	PASS
N71	15	5	CP-16QAM	L	Inner_Full	23.00	PC3	PASS
N71	15	5	CP-16QAM	L	Edge_1RB_Right	22.27	PC3	PASS
N71	15	5	CP-QPSK	M	Outer_Full	21.94	PC3	PASS
N71	15	5	CP-QPSK	M	Edge_1RB_Left	21.88	PC3	PASS
N71	15	5	CP-QPSK	M	Inner_Full	23.31	PC3	PASS
N71	15	5	CP-QPSK	M	Edge_1RB_Right	21.80	PC3	PASS
N71	15	5	CP-16QAM	M	Outer_Full	21.99	PC3	PASS
N71	15	5	CP-16QAM	M	Edge_1RB_Left	21.95	PC3	PASS
N71	15	5	CP-16QAM	M	Inner_Full	22.99	PC3	PASS
N71	15	5	CP-16QAM	M	Edge_1RB_Right	21.85	PC3	PASS
N71	15	5	CP-QPSK	H	Outer_Full	21.98	PC3	PASS
N71	15	5	CP-QPSK	H	Edge_1RB_Left	21.77	PC3	PASS
N71	15	5	CP-QPSK	H	Inner_Full	23.32	PC3	PASS
N71	15	5	CP-QPSK	H	Edge_1RB_Right	21.89	PC3	PASS
N71	15	5	CP-16QAM	H	Outer_Full	21.98	PC3	PASS
N71	15	5	CP-16QAM	H	Edge_1RB_Left	21.99	PC3	PASS
N71	15	5	CP-16QAM	H	Inner_Full	23.05	PC3	PASS
N71	15	5	CP-16QAM	H	Edge_1RB_Right	22.01	PC3	PASS
N71	15	10	CP-QPSK	L	Outer_Full	21.86	PC3	PASS
N71	15	10	CP-QPSK	L	Edge_1RB_Left	21.73	PC3	PASS
N71	15	10	CP-QPSK	L	Inner_Full	23.33	PC3	PASS
N71	15	10	CP-QPSK	L	Edge_1RB_Right	21.82	PC3	PASS
N71	15	10	CP-16QAM	L	Outer_Full	21.82	PC3	PASS
N71	15	10	CP-16QAM	L	Edge_1RB_Left	22.35	PC3	PASS
N71	15	10	CP-16QAM	L	Inner_Full	22.90	PC3	PASS
N71	15	10	CP-16QAM	L	Edge_1RB_Right	22.06	PC3	PASS
N71	15	10	CP-QPSK	M	Outer_Full	21.87	PC3	PASS
N71	15	10	CP-QPSK	M	Edge_1RB_Left	21.80	PC3	PASS
N71	15	10	CP-QPSK	M	Inner_Full	23.24	PC3	PASS
N71	15	10	CP-QPSK	M	Edge_1RB_Right	21.87	PC3	PASS
N71	15	10	CP-16QAM	M	Outer_Full	21.88	PC3	PASS
N71	15	10	CP-16QAM	M	Edge_1RB_Left	21.95	PC3	PASS
N71	15	10	CP-16QAM	M	Inner_Full	22.90	PC3	PASS
N71	15	10	CP-16QAM	M	Edge_1RB_Right	22.37	PC3	PASS
N71	15	10	CP-QPSK	H	Outer_Full	21.92	PC3	PASS

N71	15	10	CP-QPSK	H	Edge_1RB_Left	21.78	PC3	PASS
N71	15	10	CP-QPSK	H	Inner_Full	23.33	PC3	PASS
N71	15	10	CP-QPSK	H	Edge_1RB_Right	21.83	PC3	PASS
N71	15	10	CP-16QAM	H	Outer_Full	21.95	PC3	PASS
N71	15	10	CP-16QAM	H	Edge_1RB_Left	22.08	PC3	PASS
N71	15	10	CP-16QAM	H	Inner_Full	22.98	PC3	PASS
N71	15	10	CP-16QAM	H	Edge_1RB_Right	22.39	PC3	PASS
N71	15	15	CP-QPSK	L	Outer_Full	21.90	PC3	PASS
N71	15	15	CP-QPSK	L	Edge_1RB_Left	21.74	PC3	PASS
N71	15	15	CP-QPSK	L	Inner_Full	23.36	PC3	PASS
N71	15	15	CP-QPSK	L	Edge_1RB_Right	21.77	PC3	PASS
N71	15	15	CP-16QAM	L	Outer_Full	21.93	PC3	PASS
N71	15	15	CP-16QAM	L	Edge_1RB_Left	21.87	PC3	PASS
N71	15	15	CP-16QAM	L	Inner_Full	22.96	PC3	PASS
N71	15	15	CP-16QAM	L	Edge_1RB_Right	22.06	PC3	PASS
N71	15	15	CP-QPSK	M	Outer_Full	21.96	PC3	PASS
N71	15	15	CP-QPSK	M	Edge_1RB_Left	21.78	PC3	PASS
N71	15	15	CP-QPSK	M	Inner_Full	23.30	PC3	PASS
N71	15	15	CP-QPSK	M	Edge_1RB_Right	21.87	PC3	PASS
N71	15	15	CP-16QAM	M	Outer_Full	21.97	PC3	PASS
N71	15	15	CP-16QAM	M	Edge_1RB_Left	22.28	PC3	PASS
N71	15	15	CP-16QAM	M	Inner_Full	22.99	PC3	PASS
N71	15	15	CP-16QAM	M	Edge_1RB_Right	22.09	PC3	PASS
N71	15	15	CP-QPSK	H	Outer_Full	22.00	PC3	PASS
N71	15	15	CP-QPSK	H	Edge_1RB_Left	21.81	PC3	PASS
N71	15	15	CP-QPSK	H	Inner_Full	23.34	PC3	PASS
N71	15	15	CP-QPSK	H	Edge_1RB_Right	21.85	PC3	PASS
N71	15	15	CP-16QAM	H	Outer_Full	21.97	PC3	PASS
N71	15	15	CP-16QAM	H	Edge_1RB_Left	22.30	PC3	PASS
N71	15	15	CP-16QAM	H	Inner_Full	22.96	PC3	PASS
N71	15	15	CP-16QAM	H	Edge_1RB_Right	22.07	PC3	PASS
N71	15	20	CP-QPSK	L	Outer_Full	21.87	PC3	PASS
N71	15	20	CP-QPSK	L	Edge_1RB_Left	21.70	PC3	PASS
N71	15	20	CP-QPSK	L	Inner_Full	23.38	PC3	PASS
N71	15	20	CP-QPSK	L	Edge_1RB_Right	21.80	PC3	PASS
N71	15	20	CP-16QAM	L	Outer_Full	21.91	PC3	PASS
N71	15	20	CP-16QAM	L	Edge_1RB_Left	21.91	PC3	PASS
N71	15	20	CP-16QAM	L	Inner_Full	23.00	PC3	PASS
N71	15	20	CP-16QAM	L	Edge_1RB_Right	21.93	PC3	PASS
N71	15	20	CP-QPSK	M	Outer_Full	21.88	PC3	PASS
N71	15	20	CP-QPSK	M	Edge_1RB_Left	21.69	PC3	PASS
N71	15	20	CP-QPSK	M	Inner_Full	23.28	PC3	PASS

N71	15	20	CP-QPSK	M	Edge_1RB_Right	21.77	PC3	PASS
N71	15	20	CP-16QAM	M	Outer_Full	21.89	PC3	PASS
N71	15	20	CP-16QAM	M	Edge_1RB_Left	22.02	PC3	PASS
N71	15	20	CP-16QAM	M	Inner_Full	22.90	PC3	PASS
N71	15	20	CP-16QAM	M	Edge_1RB_Right	22.10	PC3	PASS
N71	15	20	CP-QPSK	H	Outer_Full	21.86	PC3	PASS
N71	15	20	CP-QPSK	H	Edge_1RB_Left	21.73	PC3	PASS
N71	15	20	CP-QPSK	H	Inner_Full	23.29	PC3	PASS
N71	15	20	CP-QPSK	H	Edge_1RB_Right	21.77	PC3	PASS
N71	15	20	CP-16QAM	H	Outer_Full	21.87	PC3	PASS
N71	15	20	CP-16QAM	H	Edge_1RB_Left	21.79	PC3	PASS
N71	15	20	CP-16QAM	H	Inner_Full	22.92	PC3	PASS
N71	15	20	CP-16QAM	H	Edge_1RB_Right	22.02	PC3	PASS
N71	15	5	DFT-QPSK	L	Outer_Full	23.79	PC3	PASS
N71	15	5	DFT-QPSK	L	Inner_Full	24.82	PC3	PASS
N71	15	5	DFT-QPSK	L	Edge_1RB_Left	23.62	PC3	PASS
N71	15	5	DFT-QPSK	L	Edge_1RB_Right	23.70	PC3	PASS
N71	15	5	DFT-16QAM	L	Outer_Full	22.88	PC3	PASS
N71	15	5	DFT-16QAM	L	Inner_Full	23.86	PC3	PASS
N71	15	5	DFT-16QAM	L	Edge_1RB_Left	23.00	PC3	PASS
N71	15	5	DFT-16QAM	L	Edge_1RB_Right	22.99	PC3	PASS
N71	15	5	DFT-QPSK	M	Outer_Full	23.81	PC3	PASS
N71	15	5	DFT-QPSK	M	Inner_Full	24.80	PC3	PASS
N71	15	5	DFT-QPSK	M	Edge_1RB_Left	23.69	PC3	PASS
N71	15	5	DFT-QPSK	M	Edge_1RB_Right	23.79	PC3	PASS
N71	15	5	DFT-16QAM	M	Outer_Full	22.93	PC3	PASS
N71	15	5	DFT-16QAM	M	Inner_Full	23.86	PC3	PASS
N71	15	5	DFT-16QAM	M	Edge_1RB_Left	22.98	PC3	PASS
N71	15	5	DFT-16QAM	M	Edge_1RB_Right	23.08	PC3	PASS
N71	15	5	DFT-QPSK	H	Outer_Full	23.83	PC3	PASS
N71	15	5	DFT-QPSK	H	Inner_Full	24.86	PC3	PASS
N71	15	5	DFT-QPSK	H	Edge_1RB_Left	23.81	PC3	PASS
N71	15	5	DFT-QPSK	H	Edge_1RB_Right	23.75	PC3	PASS
N71	15	5	DFT-16QAM	H	Outer_Full	22.91	PC3	PASS
N71	15	5	DFT-16QAM	H	Inner_Full	23.89	PC3	PASS
N71	15	5	DFT-16QAM	H	Edge_1RB_Left	23.15	PC3	PASS
N71	15	5	DFT-16QAM	H	Edge_1RB_Right	23.06	PC3	PASS
N71	15	10	DFT-QPSK	L	Outer_Full	23.82	PC3	PASS
N71	15	10	DFT-QPSK	L	Inner_Full	24.82	PC3	PASS
N71	15	10	DFT-QPSK	L	Edge_1RB_Left	23.79	PC3	PASS
N71	15	10	DFT-QPSK	L	Edge_1RB_Right	23.77	PC3	PASS
N71	15	10	DFT-16QAM	L	Outer_Full	22.85	PC3	PASS

N71	15	10	DFT-16QAM	L	Inner_Full	23.84	PC3	PASS
N71	15	10	DFT-16QAM	L	Edge_1RB_Left	22.98	PC3	PASS
N71	15	10	DFT-16QAM	L	Edge_1RB_Right	23.02	PC3	PASS
N71	15	10	DFT-QPSK	M	Outer_Full	23.74	PC3	PASS
N71	15	10	DFT-QPSK	M	Inner_Full	24.77	PC3	PASS
N71	15	10	DFT-QPSK	M	Edge_1RB_Left	23.70	PC3	PASS
N71	15	10	DFT-QPSK	M	Edge_1RB_Right	23.78	PC3	PASS
N71	15	10	DFT-16QAM	M	Outer_Full	22.88	PC3	PASS
N71	15	10	DFT-16QAM	M	Inner_Full	23.73	PC3	PASS
N71	15	10	DFT-16QAM	M	Edge_1RB_Left	23.03	PC3	PASS
N71	15	10	DFT-16QAM	M	Edge_1RB_Right	23.05	PC3	PASS
N71	15	10	DFT-QPSK	H	Outer_Full	23.77	PC3	PASS
N71	15	10	DFT-QPSK	H	Inner_Full	24.81	PC3	PASS
N71	15	10	DFT-QPSK	H	Edge_1RB_Left	23.77	PC3	PASS
N71	15	10	DFT-QPSK	H	Edge_1RB_Right	23.76	PC3	PASS
N71	15	10	DFT-16QAM	H	Outer_Full	22.91	PC3	PASS
N71	15	10	DFT-16QAM	H	Inner_Full	23.82	PC3	PASS
N71	15	10	DFT-16QAM	H	Edge_1RB_Left	23.03	PC3	PASS
N71	15	10	DFT-16QAM	H	Edge_1RB_Right	23.05	PC3	PASS
N71	15	15	DFT-QPSK	L	Outer_Full	23.75	PC3	PASS
N71	15	15	DFT-QPSK	L	Inner_Full	24.74	PC3	PASS
N71	15	15	DFT-QPSK	L	Edge_1RB_Left	23.66	PC3	PASS
N71	15	15	DFT-QPSK	L	Edge_1RB_Right	23.74	PC3	PASS
N71	15	15	DFT-16QAM	L	Outer_Full	22.85	PC3	PASS
N71	15	15	DFT-16QAM	L	Inner_Full	23.82	PC3	PASS
N71	15	15	DFT-16QAM	L	Edge_1RB_Left	22.87	PC3	PASS
N71	15	15	DFT-16QAM	L	Edge_1RB_Right	23.09	PC3	PASS
N71	15	15	DFT-QPSK	M	Outer_Full	23.80	PC3	PASS
N71	15	15	DFT-QPSK	M	Inner_Full	24.75	PC3	PASS
N71	15	15	DFT-QPSK	M	Edge_1RB_Left	23.71	PC3	PASS
N71	15	15	DFT-QPSK	M	Edge_1RB_Right	23.75	PC3	PASS
N71	15	15	DFT-16QAM	M	Outer_Full	22.85	PC3	PASS
N71	15	15	DFT-16QAM	M	Inner_Full	23.75	PC3	PASS
N71	15	15	DFT-16QAM	M	Edge_1RB_Left	23.02	PC3	PASS
N71	15	15	DFT-16QAM	M	Edge_1RB_Right	22.92	PC3	PASS
N71	15	15	DFT-QPSK	H	Outer_Full	23.79	PC3	PASS
N71	15	15	DFT-QPSK	H	Inner_Full	24.79	PC3	PASS
N71	15	15	DFT-QPSK	H	Edge_1RB_Left	23.76	PC3	PASS
N71	15	15	DFT-QPSK	H	Edge_1RB_Right	23.75	PC3	PASS
N71	15	15	DFT-16QAM	H	Outer_Full	22.88	PC3	PASS
N71	15	15	DFT-16QAM	H	Inner_Full	23.81	PC3	PASS
N71	15	15	DFT-16QAM	H	Edge_1RB_Left	23.09	PC3	PASS

N71	15	15	DFT-16QAM	H	Edge_1RB_Right	23.06	PC3	PASS
N71	15	20	DFT-QPSK	L	Outer_Full	23.81	PC3	PASS
N71	15	20	DFT-QPSK	L	Inner_Full	24.84	PC3	PASS
N71	15	20	DFT-QPSK	L	Edge_1RB_Left	23.82	PC3	PASS
N71	15	20	DFT-QPSK	L	Edge_1RB_Right	23.78	PC3	PASS
N71	15	20	DFT-16QAM	L	Outer_Full	22.86	PC3	PASS
N71	15	20	DFT-16QAM	L	Inner_Full	23.83	PC3	PASS
N71	15	20	DFT-16QAM	L	Edge_1RB_Left	22.98	PC3	PASS
N71	15	20	DFT-16QAM	L	Edge_1RB_Right	23.17	PC3	PASS
N71	15	20	DFT-QPSK	M	Outer_Full	23.75	PC3	PASS
N71	15	20	DFT-QPSK	M	Inner_Full	24.81	PC3	PASS
N71	15	20	DFT-QPSK	M	Edge_1RB_Left	23.74	PC3	PASS
N71	15	20	DFT-QPSK	M	Edge_1RB_Right	23.70	PC3	PASS
N71	15	20	DFT-16QAM	M	Outer_Full	22.85	PC3	PASS
N71	15	20	DFT-16QAM	M	Inner_Full	23.83	PC3	PASS
N71	15	20	DFT-16QAM	M	Edge_1RB_Left	22.94	PC3	PASS
N71	15	20	DFT-16QAM	M	Edge_1RB_Right	23.07	PC3	PASS
N71	15	20	DFT-QPSK	H	Outer_Full	23.86	PC3	PASS
N71	15	20	DFT-QPSK	H	Inner_Full	24.89	PC3	PASS
N71	15	20	DFT-QPSK	H	Edge_1RB_Left	23.71	PC3	PASS
N71	15	20	DFT-QPSK	H	Edge_1RB_Right	23.70	PC3	PASS
N71	15	20	DFT-16QAM	H	Outer_Full	22.91	PC3	PASS
N71	15	20	DFT-16QAM	H	Inner_Full	23.87	PC3	PASS
N71	15	20	DFT-16QAM	H	Edge_1RB_Left	23.03	PC3	PASS
N71	15	20	DFT-16QAM	H	Edge_1RB_Right	23.05	PC3	PASS

5G NR(P1): N77_3450-3550MHz

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N77-3450-3550	30	10	DFT-QPSK	L	Outer_Full	25.30	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Inner_Full	26.29	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Edge_1RB_Left	22.88	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Edge_1RB_Right	22.93	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	L	Outer_Full	24.39	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	L	Inner_Full	25.33	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	L	Edge_1RB_Left	23.09	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	L	Edge_1RB_Right	22.92	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Outer_Full	25.02	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Inner_Full	26.18	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Edge_1RB_Left	22.76	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Edge_1RB_Right	22.68	PC2	PASS

N77-3450-3550	30	10	DFT-16QAM	M	Outer_Full	24.22	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	M	Inner_Full	25.07	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	M	Edge_1RB_Left	22.94	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	M	Edge_1RB_Right	23.26	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Outer_Full	24.73	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Inner_Full	25.76	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Edge_1RB_Left	22.30	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Edge_1RB_Right	22.44	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	H	Outer_Full	23.94	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	H	Inner_Full	24.84	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	H	Edge_1RB_Left	22.47	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	H	Edge_1RB_Right	22.51	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Outer_Full	25.32	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Inner_Full	26.36	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Edge_1RB_Left	22.74	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Edge_1RB_Right	22.97	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	L	Outer_Full	24.40	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	L	Inner_Full	25.31	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	L	Edge_1RB_Left	23.10	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	L	Edge_1RB_Right	23.36	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Outer_Full	25.09	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Inner_Full	26.07	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Edge_1RB_Left	22.71	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Edge_1RB_Right	22.48	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	M	Outer_Full	24.14	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	M	Inner_Full	25.12	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	M	Edge_1RB_Left	23.17	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	M	Edge_1RB_Right	22.93	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Outer_Full	24.67	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Inner_Full	25.72	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Edge_1RB_Left	22.27	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Edge_1RB_Right	22.33	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	H	Outer_Full	23.78	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	H	Inner_Full	24.72	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	H	Edge_1RB_Left	22.72	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	H	Edge_1RB_Right	22.77	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Outer_Full	25.36	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Inner_Full	26.32	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Edge_1RB_Left	22.81	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Edge_1RB_Right	23.08	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	L	Outer_Full	24.51	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	L	Inner_Full	25.30	PC2	PASS

N77-3450-3550	30	20	DFT-16QAM	L	Edge_1RB_Left	22.93	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	L	Edge_1RB_Right	23.11	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Outer_Full	25.13	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Inner_Full	26.08	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Edge_1RB_Left	22.86	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Edge_1RB_Right	22.61	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	M	Outer_Full	24.20	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	M	Inner_Full	25.09	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	M	Edge_1RB_Left	23.36	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	M	Edge_1RB_Right	22.75	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Outer_Full	24.69	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Inner_Full	25.72	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Edge_1RB_Left	22.35	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Edge_1RB_Right	22.30	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	H	Outer_Full	23.75	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	H	Inner_Full	24.72	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	H	Edge_1RB_Left	22.53	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	H	Edge_1RB_Right	22.86	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Outer_Full	25.34	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Inner_Full	26.44	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Edge_1RB_Left	22.80	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Edge_1RB_Right	22.70	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	L	Outer_Full	24.41	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	L	Inner_Full	25.52	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	L	Edge_1RB_Left	22.71	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	L	Edge_1RB_Right	22.88	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Outer_Full	25.14	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Inner_Full	26.12	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Edge_1RB_Left	22.85	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Edge_1RB_Right	22.40	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	M	Outer_Full	24.16	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	M	Inner_Full	25.16	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	M	Edge_1RB_Left	23.37	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	M	Edge_1RB_Right	23.03	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Outer_Full	24.81	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Inner_Full	25.88	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Edge_1RB_Left	22.32	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Edge_1RB_Right	22.21	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	H	Outer_Full	23.86	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	H	Inner_Full	24.89	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	H	Edge_1RB_Left	22.56	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	H	Edge_1RB_Right	22.78	PC2	PASS

N77-3450-3550	30	50	DFT-QPSK	L	Outer_Full	25.33	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Inner_Full	26.43	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Edge_1RB_Left	22.74	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Edge_1RB_Right	22.50	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	L	Outer_Full	24.34	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	L	Inner_Full	25.43	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	L	Edge_1RB_Left	22.99	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	L	Edge_1RB_Right	22.79	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Outer_Full	25.15	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Inner_Full	26.21	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Edge_1RB_Left	22.87	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Edge_1RB_Right	22.48	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	M	Outer_Full	24.18	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	M	Inner_Full	25.18	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	M	Edge_1RB_Left	23.19	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	M	Edge_1RB_Right	22.71	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Outer_Full	24.85	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Inner_Full	25.98	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Edge_1RB_Left	22.49	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Edge_1RB_Right	22.18	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	H	Outer_Full	23.88	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	H	Inner_Full	24.95	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	H	Edge_1RB_Left	22.66	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	H	Edge_1RB_Right	22.21	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Outer_Full	25.20	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Inner_Full	26.25	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Edge_1RB_Left	22.71	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Edge_1RB_Right	22.24	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	L	Outer_Full	24.23	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	L	Inner_Full	25.31	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	L	Edge_1RB_Left	22.88	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	L	Edge_1RB_Right	22.50	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Outer_Full	25.10	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Inner_Full	26.12	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Edge_1RB_Left	22.88	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Edge_1RB_Right	22.33	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	M	Outer_Full	24.13	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	M	Inner_Full	25.14	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	M	Edge_1RB_Left	23.12	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	M	Edge_1RB_Right	22.59	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Outer_Full	24.92	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Inner_Full	25.94	PC2	PASS

N77-3450-3550	30	60	DFT-QPSK	H	Edge_1RB_Left	22.69	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Edge_1RB_Right	22.18	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	H	Outer_Full	23.93	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	H	Inner_Full	24.89	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	H	Edge_1RB_Left	22.94	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	H	Edge_1RB_Right	22.69	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Outer_Full	25.18	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Inner_Full	26.27	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Edge_1RB_Left	22.81	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Edge_1RB_Right	22.34	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	L	Outer_Full	24.24	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	L	Inner_Full	25.29	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	L	Edge_1RB_Left	22.98	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	L	Edge_1RB_Right	22.59	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Outer_Full	25.16	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Inner_Full	26.21	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Edge_1RB_Left	22.89	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Edge_1RB_Right	22.20	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	M	Outer_Full	24.21	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	M	Inner_Full	25.24	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	M	Edge_1RB_Left	22.90	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	M	Edge_1RB_Right	22.49	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Outer_Full	25.12	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Inner_Full	26.12	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Edge_1RB_Left	22.89	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Edge_1RB_Right	22.34	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	H	Outer_Full	24.11	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	H	Inner_Full	25.14	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	H	Edge_1RB_Left	23.17	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	H	Edge_1RB_Right	22.24	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Outer_Full	25.17	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Inner_Full	26.23	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Edge_1RB_Left	22.73	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Edge_1RB_Right	22.13	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	L	Outer_Full	24.19	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	L	Inner_Full	25.21	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	L	Edge_1RB_Left	22.91	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	L	Edge_1RB_Right	22.08	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Outer_Full	25.24	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Inner_Full	26.25	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Edge_1RB_Left	22.78	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Edge_1RB_Right	22.20	PC2	PASS

N77-3450-3550	30	90	DFT-16QAM	M	Outer_Full	24.22	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	M	Inner_Full	25.22	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	M	Edge_1RB_Left	22.75	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	M	Edge_1RB_Right	22.17	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Outer_Full	25.19	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Inner_Full	26.21	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Edge_1RB_Left	22.90	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Edge_1RB_Right	22.23	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	H	Outer_Full	24.19	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	H	Inner_Full	25.21	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	H	Edge_1RB_Left	23.09	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	H	Edge_1RB_Right	22.52	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	L	Outer_Full	25.22	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	L	Inner_Full	26.47	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	L	Edge_1RB_Left	22.59	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	L	Edge_1RB_Right	22.06	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	L	Outer_Full	24.18	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	L	Inner_Full	25.29	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	L	Edge_1RB_Left	22.97	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	L	Edge_1RB_Right	22.34	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Outer_Full	25.25	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Inner_Full	26.22	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Edge_1RB_Left	22.59	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Edge_1RB_Right	22.10	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	M	Outer_Full	24.21	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	M	Inner_Full	25.22	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	M	Edge_1RB_Left	22.84	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	M	Edge_1RB_Right	22.42	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	H	Outer_Full	25.25	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	H	Inner_Full	26.22	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	H	Edge_1RB_Left	22.56	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	H	Edge_1RB_Right	22.09	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	H	Outer_Full	24.17	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	H	Inner_Full	25.24	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	H	Edge_1RB_Left	22.86	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	H	Edge_1RB_Right	22.59	PC2	PASS

5G NR(P1): N77_3700-3980MHz

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N77-3700-3980	30	10	DFT-QPSK	L	Outer_Full	25.13	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Inner_Full	26.22	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Edge_1RB_Left	22.70	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Edge_1RB_Right	22.75	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	L	Outer_Full	24.26	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	L	Inner_Full	25.24	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	L	Edge_1RB_Left	22.71	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	L	Edge_1RB_Right	22.74	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Outer_Full	25.65	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Inner_Full	26.82	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Edge_1RB_Left	23.23	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Edge_1RB_Right	23.22	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	M	Outer_Full	24.89	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	M	Inner_Full	25.74	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	M	Edge_1RB_Left	23.25	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	M	Edge_1RB_Right	23.23	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Outer_Full	25.78	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Inner_Full	26.81	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Edge_1RB_Left	23.40	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Edge_1RB_Right	23.37	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	H	Outer_Full	24.82	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	H	Inner_Full	26.03	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	H	Edge_1RB_Left	23.35	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	H	Edge_1RB_Right	23.38	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Outer_Full	25.29	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Inner_Full	26.28	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Edge_1RB_Left	22.68	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Edge_1RB_Right	22.84	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	L	Outer_Full	24.34	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	L	Inner_Full	25.29	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	L	Edge_1RB_Left	22.88	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	L	Edge_1RB_Right	22.94	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Outer_Full	25.74	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Inner_Full	26.78	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Edge_1RB_Left	23.29	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Edge_1RB_Right	23.17	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	M	Outer_Full	24.73	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	M	Inner_Full	25.78	PC2	PASS

N77-3700-3980	30	15	DFT-16QAM	M	Edge_1RB_Left	23.35	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	M	Edge_1RB_Right	23.34	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Outer_Full	25.90	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Inner_Full	26.84	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Edge_1RB_Left	23.40	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Edge_1RB_Right	23.36	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	H	Outer_Full	24.91	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	H	Inner_Full	25.85	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	H	Edge_1RB_Left	23.95	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	H	Edge_1RB_Right	23.87	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Outer_Full	25.28	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Inner_Full	26.31	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Edge_1RB_Left	22.78	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Edge_1RB_Right	22.85	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	L	Outer_Full	24.28	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	L	Inner_Full	25.30	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	L	Edge_1RB_Left	22.90	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	L	Edge_1RB_Right	22.77	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Outer_Full	25.75	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Inner_Full	26.74	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Edge_1RB_Left	23.29	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Edge_1RB_Right	23.23	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	M	Outer_Full	24.76	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	M	Inner_Full	25.78	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	M	Edge_1RB_Left	23.39	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	M	Edge_1RB_Right	23.12	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Outer_Full	25.86	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Inner_Full	26.90	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Edge_1RB_Left	23.39	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Edge_1RB_Right	23.38	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	H	Outer_Full	24.96	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	H	Inner_Full	25.90	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	H	Edge_1RB_Left	23.51	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	H	Edge_1RB_Right	23.30	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Outer_Full	25.26	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Inner_Full	26.27	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Edge_1RB_Left	22.71	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Edge_1RB_Right	22.79	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	L	Outer_Full	24.26	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	L	Inner_Full	25.27	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	L	Edge_1RB_Left	22.62	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	L	Edge_1RB_Right	22.99	PC2	PASS

N77-3700-3980	30	40	DFT-QPSK	M	Outer_Full	25.77	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Inner_Full	26.68	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Edge_1RB_Left	23.16	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Edge_1RB_Right	23.39	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	M	Outer_Full	24.77	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	M	Inner_Full	25.77	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	M	Edge_1RB_Left	23.40	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	M	Edge_1RB_Right	23.61	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Outer_Full	25.83	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Inner_Full	26.86	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Edge_1RB_Left	23.05	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Edge_1RB_Right	23.49	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	H	Outer_Full	24.82	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	H	Inner_Full	25.91	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	H	Edge_1RB_Left	23.27	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	H	Edge_1RB_Right	23.87	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Outer_Full	25.32	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Inner_Full	26.38	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Edge_1RB_Left	22.75	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Edge_1RB_Right	22.76	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	L	Outer_Full	24.36	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	L	Inner_Full	25.37	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	L	Edge_1RB_Left	22.92	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	L	Edge_1RB_Right	23.34	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Outer_Full	25.73	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Inner_Full	26.75	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Edge_1RB_Left	23.05	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Edge_1RB_Right	23.36	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	M	Outer_Full	24.76	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	M	Inner_Full	25.77	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	M	Edge_1RB_Left	23.69	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	M	Edge_1RB_Right	23.97	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Outer_Full	25.82	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Inner_Full	26.81	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Edge_1RB_Left	23.19	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Edge_1RB_Right	23.39	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	H	Outer_Full	24.80	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	H	Inner_Full	25.84	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	H	Edge_1RB_Left	23.39	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	H	Edge_1RB_Right	23.63	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Outer_Full	25.26	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Inner_Full	26.31	PC2	PASS

N77-3700-3980	30	60	DFT-QPSK	L	Edge_1RB_Left	22.61	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Edge_1RB_Right	22.69	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	L	Outer_Full	24.27	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	L	Inner_Full	25.32	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	L	Edge_1RB_Left	22.86	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	L	Edge_1RB_Right	22.97	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Outer_Full	25.73	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Inner_Full	26.75	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Edge_1RB_Left	23.07	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Edge_1RB_Right	23.24	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	M	Outer_Full	24.73	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	M	Inner_Full	25.75	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	M	Edge_1RB_Left	23.58	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	M	Edge_1RB_Right	23.51	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Outer_Full	25.77	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Inner_Full	26.68	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Edge_1RB_Left	23.04	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Edge_1RB_Right	23.37	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	H	Outer_Full	24.74	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	H	Inner_Full	25.69	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	H	Edge_1RB_Left	23.02	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	H	Edge_1RB_Right	23.36	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Outer_Full	25.69	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Inner_Full	26.73	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Edge_1RB_Left	23.16	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Edge_1RB_Right	23.13	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	L	Outer_Full	24.70	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	L	Inner_Full	25.74	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	L	Edge_1RB_Left	23.70	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	L	Edge_1RB_Right	23.69	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Outer_Full	25.73	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Inner_Full	26.81	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Edge_1RB_Left	23.08	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Edge_1RB_Right	23.24	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	M	Outer_Full	24.74	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	M	Inner_Full	25.78	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	M	Edge_1RB_Left	23.55	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	M	Edge_1RB_Right	23.69	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Outer_Full	25.74	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Inner_Full	26.72	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Edge_1RB_Left	23.20	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Edge_1RB_Right	23.47	PC2	PASS

N77-3700-3980	30	80	DFT-16QAM	H	Outer_Full	24.77	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	H	Inner_Full	25.71	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	H	Edge_1RB_Left	23.44	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	H	Edge_1RB_Right	23.74	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Outer_Full	25.71	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Inner_Full	26.75	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Edge_1RB_Left	23.10	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Edge_1RB_Right	23.11	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	L	Outer_Full	24.72	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	L	Inner_Full	25.75	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	L	Edge_1RB_Left	23.70	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	L	Edge_1RB_Right	23.66	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Outer_Full	25.79	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Inner_Full	26.74	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Edge_1RB_Left	23.04	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Edge_1RB_Right	23.26	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	M	Outer_Full	24.78	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	M	Inner_Full	25.73	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	M	Edge_1RB_Left	23.19	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	M	Edge_1RB_Right	23.43	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Outer_Full	25.80	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Inner_Full	26.75	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Edge_1RB_Left	23.19	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Edge_1RB_Right	23.38	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	H	Outer_Full	24.77	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	H	Inner_Full	25.72	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	H	Edge_1RB_Left	23.55	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	H	Edge_1RB_Right	23.83	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Outer_Full	25.65	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Inner_Full	26.92	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Edge_1RB_Left	22.85	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Edge_1RB_Right	23.19	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	L	Outer_Full	24.70	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	L	Inner_Full	25.71	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	L	Edge_1RB_Left	23.45	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	L	Edge_1RB_Right	23.32	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Outer_Full	25.76	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Inner_Full	26.76	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Edge_1RB_Left	22.70	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Edge_1RB_Right	23.04	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	M	Outer_Full	24.76	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	M	Inner_Full	25.80	PC2	PASS

N77-3700-3980	30	100	DFT-16QAM	M	Edge_1RB_Left	22.98	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	M	Edge_1RB_Right	23.45	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Outer_Full	25.76	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Inner_Full	26.69	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Edge_1RB_Left	23.08	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Edge_1RB_Right	23.20	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	H	Outer_Full	24.78	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	H	Inner_Full	25.70	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	H	Edge_1RB_Left	23.56	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	H	Edge_1RB_Right	23.50	PC2	PASS

5G NR(P2): Receiver ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N2	15	5	CP-QPSK	L	Outer_Full	14.90	PC3	PASS
N2	15	5	CP-QPSK	L	Edge_1RB_Left	14.76	PC3	PASS
N2	15	5	CP-QPSK	L	Inner_Full	14.82	PC3	PASS
N2	15	5	CP-QPSK	L	Edge_1RB_Right	14.87	PC3	PASS
N2	15	5	CP-16QAM	L	Outer_Full	14.92	PC3	PASS
N2	15	5	CP-16QAM	L	Edge_1RB_Left	15.15	PC3	PASS
N2	15	5	CP-16QAM	L	Inner_Full	14.80	PC3	PASS
N2	15	5	CP-16QAM	L	Edge_1RB_Right	15.04	PC3	PASS
N2	15	5	CP-QPSK	M	Outer_Full	14.02	PC3	PASS
N2	15	5	CP-QPSK	M	Edge_1RB_Left	14.07	PC3	PASS
N2	15	5	CP-QPSK	M	Inner_Full	13.89	PC3	PASS
N2	15	5	CP-QPSK	M	Edge_1RB_Right	13.94	PC3	PASS
N2	15	5	CP-16QAM	M	Outer_Full	14.03	PC3	PASS
N2	15	5	CP-16QAM	M	Edge_1RB_Left	14.32	PC3	PASS
N2	15	5	CP-16QAM	M	Inner_Full	14.03	PC3	PASS
N2	15	5	CP-16QAM	M	Edge_1RB_Right	14.37	PC3	PASS
N2	15	5	CP-QPSK	H	Outer_Full	12.77	PC3	PASS
N2	15	5	CP-QPSK	H	Edge_1RB_Left	12.94	PC3	PASS
N2	15	5	CP-QPSK	H	Inner_Full	12.70	PC3	PASS
N2	15	5	CP-QPSK	H	Edge_1RB_Right	12.68	PC3	PASS
N2	15	5	CP-16QAM	H	Outer_Full	12.76	PC3	PASS
N2	15	5	CP-16QAM	H	Edge_1RB_Left	13.04	PC3	PASS
N2	15	5	CP-16QAM	H	Inner_Full	12.81	PC3	PASS
N2	15	5	CP-16QAM	H	Edge_1RB_Right	12.96	PC3	PASS
N2	15	10	CP-QPSK	L	Outer_Full	14.76	PC3	PASS
N2	15	10	CP-QPSK	L	Edge_1RB_Left	14.86	PC3	PASS

N2	15	10	CP-QPSK	L	Inner_Full	14.76	PC3	PASS
N2	15	10	CP-QPSK	L	Edge_1RB_Right	14.64	PC3	PASS
N2	15	10	CP-16QAM	L	Outer_Full	14.83	PC3	PASS
N2	15	10	CP-16QAM	L	Edge_1RB_Left	15.11	PC3	PASS
N2	15	10	CP-16QAM	L	Inner_Full	14.83	PC3	PASS
N2	15	10	CP-16QAM	L	Edge_1RB_Right	14.96	PC3	PASS
N2	15	10	CP-QPSK	M	Outer_Full	13.90	PC3	PASS
N2	15	10	CP-QPSK	M	Edge_1RB_Left	13.96	PC3	PASS
N2	15	10	CP-QPSK	M	Inner_Full	13.93	PC3	PASS
N2	15	10	CP-QPSK	M	Edge_1RB_Right	14.03	PC3	PASS
N2	15	10	CP-16QAM	M	Outer_Full	13.95	PC3	PASS
N2	15	10	CP-16QAM	M	Edge_1RB_Left	14.28	PC3	PASS
N2	15	10	CP-16QAM	M	Inner_Full	13.95	PC3	PASS
N2	15	10	CP-16QAM	M	Edge_1RB_Right	14.17	PC3	PASS
N2	15	10	CP-QPSK	H	Outer_Full	12.84	PC3	PASS
N2	15	10	CP-QPSK	H	Edge_1RB_Left	13.17	PC3	PASS
N2	15	10	CP-QPSK	H	Inner_Full	12.73	PC3	PASS
N2	15	10	CP-QPSK	H	Edge_1RB_Right	12.67	PC3	PASS
N2	15	10	CP-16QAM	H	Outer_Full	12.79	PC3	PASS
N2	15	10	CP-16QAM	H	Edge_1RB_Left	13.33	PC3	PASS
N2	15	10	CP-16QAM	H	Inner_Full	12.77	PC3	PASS
N2	15	10	CP-16QAM	H	Edge_1RB_Right	12.88	PC3	PASS
N2	15	15	CP-QPSK	L	Outer_Full	14.82	PC3	PASS
N2	15	15	CP-QPSK	L	Edge_1RB_Left	14.85	PC3	PASS
N2	15	15	CP-QPSK	L	Inner_Full	14.81	PC3	PASS
N2	15	15	CP-QPSK	L	Edge_1RB_Right	14.43	PC3	PASS
N2	15	15	CP-16QAM	L	Outer_Full	14.83	PC3	PASS
N2	15	15	CP-16QAM	L	Edge_1RB_Left	15.19	PC3	PASS
N2	15	15	CP-16QAM	L	Inner_Full	14.83	PC3	PASS
N2	15	15	CP-16QAM	L	Edge_1RB_Right	14.88	PC3	PASS
N2	15	15	CP-QPSK	M	Outer_Full	13.98	PC3	PASS
N2	15	15	CP-QPSK	M	Edge_1RB_Left	14.23	PC3	PASS
N2	15	15	CP-QPSK	M	Inner_Full	13.92	PC3	PASS
N2	15	15	CP-QPSK	M	Edge_1RB_Right	13.97	PC3	PASS
N2	15	15	CP-16QAM	M	Outer_Full	13.99	PC3	PASS
N2	15	15	CP-16QAM	M	Edge_1RB_Left	14.37	PC3	PASS
N2	15	15	CP-16QAM	M	Inner_Full	13.95	PC3	PASS
N2	15	15	CP-16QAM	M	Edge_1RB_Right	14.16	PC3	PASS
N2	15	15	CP-QPSK	H	Outer_Full	13.05	PC3	PASS
N2	15	15	CP-QPSK	H	Edge_1RB_Left	13.58	PC3	PASS
N2	15	15	CP-QPSK	H	Inner_Full	12.99	PC3	PASS
N2	15	15	CP-QPSK	H	Edge_1RB_Right	12.71	PC3	PASS

N2	15	15	CP-16QAM	H	Outer_Full	13.06	PC3	PASS
N2	15	15	CP-16QAM	H	Edge_1RB_Left	13.66	PC3	PASS
N2	15	15	CP-16QAM	H	Inner_Full	13.05	PC3	PASS
N2	15	15	CP-16QAM	H	Edge_1RB_Right	13.02	PC3	PASS
N2	15	20	CP-QPSK	L	Outer_Full	14.76	PC3	PASS
N2	15	20	CP-QPSK	L	Edge_1RB_Left	14.79	PC3	PASS
N2	15	20	CP-QPSK	L	Inner_Full	14.75	PC3	PASS
N2	15	20	CP-QPSK	L	Edge_1RB_Right	14.10	PC3	PASS
N2	15	20	CP-16QAM	L	Outer_Full	14.78	PC3	PASS
N2	15	20	CP-16QAM	L	Edge_1RB_Left	15.14	PC3	PASS
N2	15	20	CP-16QAM	L	Inner_Full	14.76	PC3	PASS
N2	15	20	CP-16QAM	L	Edge_1RB_Right	14.43	PC3	PASS
N2	15	20	CP-QPSK	M	Outer_Full	14.01	PC3	PASS
N2	15	20	CP-QPSK	M	Edge_1RB_Left	14.23	PC3	PASS
N2	15	20	CP-QPSK	M	Inner_Full	13.98	PC3	PASS
N2	15	20	CP-QPSK	M	Edge_1RB_Right	13.95	PC3	PASS
N2	15	20	CP-16QAM	M	Outer_Full	13.98	PC3	PASS
N2	15	20	CP-16QAM	M	Edge_1RB_Left	14.62	PC3	PASS
N2	15	20	CP-16QAM	M	Inner_Full	13.98	PC3	PASS
N2	15	20	CP-16QAM	M	Edge_1RB_Right	14.17	PC3	PASS
N2	15	20	CP-QPSK	H	Outer_Full	13.19	PC3	PASS
N2	15	20	CP-QPSK	H	Edge_1RB_Left	13.79	PC3	PASS
N2	15	20	CP-QPSK	H	Inner_Full	13.18	PC3	PASS
N2	15	20	CP-QPSK	H	Edge_1RB_Right	12.73	PC3	PASS
N2	15	20	CP-16QAM	H	Outer_Full	13.20	PC3	PASS
N2	15	20	CP-16QAM	H	Edge_1RB_Left	13.92	PC3	PASS
N2	15	20	CP-16QAM	H	Inner_Full	13.19	PC3	PASS
N2	15	20	CP-16QAM	H	Edge_1RB_Right	12.98	PC3	PASS
N2	15	5	DFT-QPSK	L	Outer_Full	16.23	PC3	PASS
N2	15	5	DFT-QPSK	L	Inner_Full	16.29	PC3	PASS
N2	15	5	DFT-QPSK	L	Edge_1RB_Left	16.47	PC3	PASS
N2	15	5	DFT-QPSK	L	Edge_1RB_Right	16.46	PC3	PASS
N2	15	5	DFT-16QAM	L	Outer_Full	16.13	PC3	PASS
N2	15	5	DFT-16QAM	L	Inner_Full	16.26	PC3	PASS
N2	15	5	DFT-16QAM	L	Edge_1RB_Left	15.97	PC3	PASS
N2	15	5	DFT-16QAM	L	Edge_1RB_Right	15.97	PC3	PASS
N2	15	5	DFT-QPSK	M	Outer_Full	16.28	PC3	PASS
N2	15	5	DFT-QPSK	M	Inner_Full	16.28	PC3	PASS
N2	15	5	DFT-QPSK	M	Edge_1RB_Left	16.42	PC3	PASS
N2	15	5	DFT-QPSK	M	Edge_1RB_Right	16.46	PC3	PASS
N2	15	5	DFT-16QAM	M	Outer_Full	16.15	PC3	PASS
N2	15	5	DFT-16QAM	M	Inner_Full	16.25	PC3	PASS

N2	15	5	DFT-16QAM	M	Edge_1RB_Left	16.39	PC3	PASS
N2	15	5	DFT-16QAM	M	Edge_1RB_Right	16.36	PC3	PASS
N2	15	5	DFT-QPSK	H	Outer_Full	16.13	PC3	PASS
N2	15	5	DFT-QPSK	H	Inner_Full	16.14	PC3	PASS
N2	15	5	DFT-QPSK	H	Edge_1RB_Left	16.05	PC3	PASS
N2	15	5	DFT-QPSK	H	Edge_1RB_Right	16.08	PC3	PASS
N2	15	5	DFT-16QAM	H	Outer_Full	16.23	PC3	PASS
N2	15	5	DFT-16QAM	H	Inner_Full	16.05	PC3	PASS
N2	15	5	DFT-16QAM	H	Edge_1RB_Left	16.35	PC3	PASS
N2	15	5	DFT-16QAM	H	Edge_1RB_Right	16.40	PC3	PASS
N2	15	10	DFT-QPSK	L	Outer_Full	16.15	PC3	PASS
N2	15	10	DFT-QPSK	L	Inner_Full	16.18	PC3	PASS
N2	15	10	DFT-QPSK	L	Edge_1RB_Left	16.40	PC3	PASS
N2	15	10	DFT-QPSK	L	Edge_1RB_Right	16.35	PC3	PASS
N2	15	10	DFT-16QAM	L	Outer_Full	16.17	PC3	PASS
N2	15	10	DFT-16QAM	L	Inner_Full	16.25	PC3	PASS
N2	15	10	DFT-16QAM	L	Edge_1RB_Left	16.28	PC3	PASS
N2	15	10	DFT-16QAM	L	Edge_1RB_Right	16.25	PC3	PASS
N2	15	10	DFT-QPSK	M	Outer_Full	16.24	PC3	PASS
N2	15	10	DFT-QPSK	M	Inner_Full	16.29	PC3	PASS
N2	15	10	DFT-QPSK	M	Edge_1RB_Left	16.18	PC3	PASS
N2	15	10	DFT-QPSK	M	Edge_1RB_Right	16.18	PC3	PASS
N2	15	10	DFT-16QAM	M	Outer_Full	16.27	PC3	PASS
N2	15	10	DFT-16QAM	M	Inner_Full	16.19	PC3	PASS
N2	15	10	DFT-16QAM	M	Edge_1RB_Left	16.01	PC3	PASS
N2	15	10	DFT-16QAM	M	Edge_1RB_Right	15.98	PC3	PASS
N2	15	10	DFT-QPSK	H	Outer_Full	16.04	PC3	PASS
N2	15	10	DFT-QPSK	H	Inner_Full	16.05	PC3	PASS
N2	15	10	DFT-QPSK	H	Edge_1RB_Left	15.70	PC3	PASS
N2	15	10	DFT-QPSK	H	Edge_1RB_Right	15.78	PC3	PASS
N2	15	10	DFT-16QAM	H	Outer_Full	16.10	PC3	PASS
N2	15	10	DFT-16QAM	H	Inner_Full	16.00	PC3	PASS
N2	15	10	DFT-16QAM	H	Edge_1RB_Left	15.91	PC3	PASS
N2	15	10	DFT-16QAM	H	Edge_1RB_Right	16.00	PC3	PASS
N2	15	15	DFT-QPSK	L	Outer_Full	16.26	PC3	PASS
N2	15	15	DFT-QPSK	L	Inner_Full	16.24	PC3	PASS
N2	15	15	DFT-QPSK	L	Edge_1RB_Left	16.19	PC3	PASS
N2	15	15	DFT-QPSK	L	Edge_1RB_Right	16.09	PC3	PASS
N2	15	15	DFT-16QAM	L	Outer_Full	16.27	PC3	PASS
N2	15	15	DFT-16QAM	L	Inner_Full	16.14	PC3	PASS
N2	15	15	DFT-16QAM	L	Edge_1RB_Left	15.86	PC3	PASS
N2	15	15	DFT-16QAM	L	Edge_1RB_Right	15.78	PC3	PASS

N2	15	15	DFT-QPSK	M	Outer_Full	16.26	PC3	PASS
N2	15	15	DFT-QPSK	M	Inner_Full	16.28	PC3	PASS
N2	15	15	DFT-QPSK	M	Edge_1RB_Left	16.26	PC3	PASS
N2	15	15	DFT-QPSK	M	Edge_1RB_Right	16.24	PC3	PASS
N2	15	15	DFT-16QAM	M	Outer_Full	16.28	PC3	PASS
N2	15	15	DFT-16QAM	M	Inner_Full	16.26	PC3	PASS
N2	15	15	DFT-16QAM	M	Edge_1RB_Left	16.12	PC3	PASS
N2	15	15	DFT-16QAM	M	Edge_1RB_Right	16.05	PC3	PASS
N2	15	15	DFT-QPSK	H	Outer_Full	16.12	PC3	PASS
N2	15	15	DFT-QPSK	H	Inner_Full	16.10	PC3	PASS
N2	15	15	DFT-QPSK	H	Edge_1RB_Left	16.31	PC3	PASS
N2	15	15	DFT-QPSK	H	Edge_1RB_Right	16.37	PC3	PASS
N2	15	15	DFT-16QAM	H	Outer_Full	16.13	PC3	PASS
N2	15	15	DFT-16QAM	H	Inner_Full	16.14	PC3	PASS
N2	15	15	DFT-16QAM	H	Edge_1RB_Left	16.40	PC3	PASS
N2	15	15	DFT-16QAM	H	Edge_1RB_Right	16.40	PC3	PASS
N2	15	20	DFT-QPSK	L	Outer_Full	16.23	PC3	PASS
N2	15	20	DFT-QPSK	L	Inner_Full	16.24	PC3	PASS
N2	15	20	DFT-QPSK	L	Edge_1RB_Left	16.44	PC3	PASS
N2	15	20	DFT-QPSK	L	Edge_1RB_Right	16.37	PC3	PASS
N2	15	20	DFT-16QAM	L	Outer_Full	16.22	PC3	PASS
N2	15	20	DFT-16QAM	L	Inner_Full	16.31	PC3	PASS
N2	15	20	DFT-16QAM	L	Edge_1RB_Left	16.34	PC3	PASS
N2	15	20	DFT-16QAM	L	Edge_1RB_Right	16.32	PC3	PASS
N2	15	20	DFT-QPSK	M	Outer_Full	16.23	PC3	PASS
N2	15	20	DFT-QPSK	M	Inner_Full	16.29	PC3	PASS
N2	15	20	DFT-QPSK	M	Edge_1RB_Left	16.31	PC3	PASS
N2	15	20	DFT-QPSK	M	Edge_1RB_Right	16.75	PC3	PASS
N2	15	20	DFT-16QAM	M	Outer_Full	16.26	PC3	PASS
N2	15	20	DFT-16QAM	M	Inner_Full	16.23	PC3	PASS
N2	15	20	DFT-16QAM	M	Edge_1RB_Left	16.71	PC3	PASS
N2	15	20	DFT-16QAM	M	Edge_1RB_Right	16.33	PC3	PASS
N2	15	20	DFT-QPSK	H	Outer_Full	16.11	PC3	PASS
N2	15	20	DFT-QPSK	H	Inner_Full	16.16	PC3	PASS
N2	15	20	DFT-QPSK	H	Edge_1RB_Left	16.19	PC3	PASS
N2	15	20	DFT-QPSK	H	Edge_1RB_Right	16.22	PC3	PASS
N2	15	20	DFT-16QAM	H	Outer_Full	16.06	PC3	PASS
N2	15	20	DFT-16QAM	H	Inner_Full	16.19	PC3	PASS
N2	15	20	DFT-16QAM	H	Edge_1RB_Left	16.20	PC3	PASS
N2	15	20	DFT-16QAM	H	Edge_1RB_Right	16.13	PC3	PASS

5G NR(P2): Receiver ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N25	15	5	DFT-QPSK	L	Outer_Full	16.28	PC3	PASS
N25	15	5	DFT-QPSK	L	Inner_Full	16.35	PC3	PASS
N25	15	5	DFT-QPSK	L	Edge_1RB_Left	16.51	PC3	PASS
N25	15	5	DFT-QPSK	L	Edge_1RB_Right	16.54	PC3	PASS
N25	15	5	DFT-16QAM	L	Outer_Full	16.15	PC3	PASS
N25	15	5	DFT-16QAM	L	Inner_Full	16.31	PC3	PASS
N25	15	5	DFT-16QAM	L	Edge_1RB_Left	15.99	PC3	PASS
N25	15	5	DFT-16QAM	L	Edge_1RB_Right	16.02	PC3	PASS
N25	15	5	DFT-QPSK	M	Outer_Full	16.29	PC3	PASS
N25	15	5	DFT-QPSK	M	Inner_Full	16.28	PC3	PASS
N25	15	5	DFT-QPSK	M	Edge_1RB_Left	16.45	PC3	PASS
N25	15	5	DFT-QPSK	M	Edge_1RB_Right	16.47	PC3	PASS
N25	15	5	DFT-16QAM	M	Outer_Full	16.18	PC3	PASS
N25	15	5	DFT-16QAM	M	Inner_Full	16.25	PC3	PASS
N25	15	5	DFT-16QAM	M	Edge_1RB_Left	16.35	PC3	PASS
N25	15	5	DFT-16QAM	M	Edge_1RB_Right	16.36	PC3	PASS
N25	15	5	DFT-QPSK	H	Outer_Full	16.22	PC3	PASS
N25	15	5	DFT-QPSK	H	Inner_Full	16.26	PC3	PASS
N25	15	5	DFT-QPSK	H	Edge_1RB_Left	16.17	PC3	PASS
N25	15	5	DFT-QPSK	H	Edge_1RB_Right	16.16	PC3	PASS
N25	15	5	DFT-16QAM	H	Outer_Full	16.24	PC3	PASS
N25	15	5	DFT-16QAM	H	Inner_Full	16.12	PC3	PASS
N25	15	5	DFT-16QAM	H	Edge_1RB_Left	16.43	PC3	PASS
N25	15	5	DFT-16QAM	H	Edge_1RB_Right	16.48	PC3	PASS
N25	15	10	DFT-QPSK	L	Outer_Full	16.15	PC3	PASS
N25	15	10	DFT-QPSK	L	Inner_Full	16.21	PC3	PASS
N25	15	10	DFT-QPSK	L	Edge_1RB_Left	16.44	PC3	PASS
N25	15	10	DFT-QPSK	L	Edge_1RB_Right	16.39	PC3	PASS
N25	15	10	DFT-16QAM	L	Outer_Full	16.17	PC3	PASS
N25	15	10	DFT-16QAM	L	Inner_Full	16.18	PC3	PASS
N25	15	10	DFT-16QAM	L	Edge_1RB_Left	16.35	PC3	PASS
N25	15	10	DFT-16QAM	L	Edge_1RB_Right	16.21	PC3	PASS
N25	15	10	DFT-QPSK	M	Outer_Full	16.25	PC3	PASS
N25	15	10	DFT-QPSK	M	Inner_Full	16.25	PC3	PASS
N25	15	10	DFT-QPSK	M	Edge_1RB_Left	16.24	PC3	PASS
N25	15	10	DFT-QPSK	M	Edge_1RB_Right	16.21	PC3	PASS
N25	15	10	DFT-16QAM	M	Outer_Full	16.28	PC3	PASS
N25	15	10	DFT-16QAM	M	Inner_Full	16.20	PC3	PASS

N25	15	10	DFT-16QAM	M	Edge_1RB_Left	16.04	PC3	PASS
N25	15	10	DFT-16QAM	M	Edge_1RB_Right	15.98	PC3	PASS
N25	15	10	DFT-QPSK	H	Outer_Full	16.19	PC3	PASS
N25	15	10	DFT-QPSK	H	Inner_Full	16.14	PC3	PASS
N25	15	10	DFT-QPSK	H	Edge_1RB_Left	15.73	PC3	PASS
N25	15	10	DFT-QPSK	H	Edge_1RB_Right	15.84	PC3	PASS
N25	15	10	DFT-16QAM	H	Outer_Full	16.18	PC3	PASS
N25	15	10	DFT-16QAM	H	Inner_Full	16.12	PC3	PASS
N25	15	10	DFT-16QAM	H	Edge_1RB_Left	15.97	PC3	PASS
N25	15	10	DFT-16QAM	H	Edge_1RB_Right	16.09	PC3	PASS
N25	15	15	DFT-QPSK	L	Outer_Full	16.25	PC3	PASS
N25	15	15	DFT-QPSK	L	Inner_Full	16.21	PC3	PASS
N25	15	15	DFT-QPSK	L	Edge_1RB_Left	16.55	PC3	PASS
N25	15	15	DFT-QPSK	L	Edge_1RB_Right	16.45	PC3	PASS
N25	15	15	DFT-16QAM	L	Outer_Full	16.21	PC3	PASS
N25	15	15	DFT-16QAM	L	Inner_Full	16.28	PC3	PASS
N25	15	15	DFT-16QAM	L	Edge_1RB_Left	16.59	PC3	PASS
N25	15	15	DFT-16QAM	L	Edge_1RB_Right	16.51	PC3	PASS
N25	15	15	DFT-QPSK	M	Outer_Full	16.25	PC3	PASS
N25	15	15	DFT-QPSK	M	Inner_Full	16.30	PC3	PASS
N25	15	15	DFT-QPSK	M	Edge_1RB_Left	16.19	PC3	PASS
N25	15	15	DFT-QPSK	M	Edge_1RB_Right	16.20	PC3	PASS
N25	15	15	DFT-16QAM	M	Outer_Full	16.24	PC3	PASS
N25	15	15	DFT-16QAM	M	Inner_Full	16.17	PC3	PASS
N25	15	15	DFT-16QAM	M	Edge_1RB_Left	16.15	PC3	PASS
N25	15	15	DFT-16QAM	M	Edge_1RB_Right	16.15	PC3	PASS
N25	15	15	DFT-QPSK	H	Outer_Full	16.20	PC3	PASS
N25	15	15	DFT-QPSK	H	Inner_Full	16.13	PC3	PASS
N25	15	15	DFT-QPSK	H	Edge_1RB_Left	16.01	PC3	PASS
N25	15	15	DFT-QPSK	H	Edge_1RB_Right	16.14	PC3	PASS
N25	15	15	DFT-16QAM	H	Outer_Full	16.14	PC3	PASS
N25	15	15	DFT-16QAM	H	Inner_Full	16.14	PC3	PASS
N25	15	15	DFT-16QAM	H	Edge_1RB_Left	16.65	PC3	PASS
N25	15	15	DFT-16QAM	H	Edge_1RB_Right	16.36	PC3	PASS
N25	15	20	DFT-QPSK	L	Outer_Full	16.27	PC3	PASS
N25	15	20	DFT-QPSK	L	Inner_Full	16.22	PC3	PASS
N25	15	20	DFT-QPSK	L	Edge_1RB_Left	16.86	PC3	PASS
N25	15	20	DFT-QPSK	L	Edge_1RB_Right	16.22	PC3	PASS
N25	15	20	DFT-16QAM	L	Outer_Full	16.23	PC3	PASS
N25	15	20	DFT-16QAM	L	Inner_Full	16.28	PC3	PASS
N25	15	20	DFT-16QAM	L	Edge_1RB_Left	16.35	PC3	PASS
N25	15	20	DFT-16QAM	L	Edge_1RB_Right	16.14	PC3	PASS

N25	15	20	DFT-QPSK	M	Outer_Full	16.28	PC3	PASS
N25	15	20	DFT-QPSK	M	Inner_Full	16.27	PC3	PASS
N25	15	20	DFT-QPSK	M	Edge_1RB_Left	16.15	PC3	PASS
N25	15	20	DFT-QPSK	M	Edge_1RB_Right	16.14	PC3	PASS
N25	15	20	DFT-16QAM	M	Outer_Full	16.26	PC3	PASS
N25	15	20	DFT-16QAM	M	Inner_Full	16.33	PC3	PASS
N25	15	20	DFT-16QAM	M	Edge_1RB_Left	16.24	PC3	PASS
N25	15	20	DFT-16QAM	M	Edge_1RB_Right	16.24	PC3	PASS
N25	15	20	DFT-QPSK	H	Outer_Full	16.13	PC3	PASS
N25	15	20	DFT-QPSK	H	Inner_Full	16.13	PC3	PASS
N25	15	20	DFT-QPSK	H	Edge_1RB_Left	16.04	PC3	PASS
N25	15	20	DFT-QPSK	H	Edge_1RB_Right	16.18	PC3	PASS
N25	15	20	DFT-16QAM	H	Outer_Full	16.13	PC3	PASS
N25	15	20	DFT-16QAM	H	Inner_Full	16.15	PC3	PASS
N25	15	20	DFT-16QAM	H	Edge_1RB_Left	15.82	PC3	PASS
N25	15	20	DFT-16QAM	H	Edge_1RB_Right	15.97	PC3	PASS

5G NR(P2): Receiver ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N66	15	5	DFT-QPSK	L	Outer_Full	16.11	PC3	PASS
N66	15	5	DFT-QPSK	L	Inner_Full	16.15	PC3	PASS
N66	15	5	DFT-QPSK	L	Edge_1RB_Left	16.41	PC3	PASS
N66	15	5	DFT-QPSK	L	Edge_1RB_Right	16.35	PC3	PASS
N66	15	5	DFT-16QAM	L	Outer_Full	15.98	PC3	PASS
N66	15	5	DFT-16QAM	L	Inner_Full	16.09	PC3	PASS
N66	15	5	DFT-16QAM	L	Edge_1RB_Left	15.91	PC3	PASS
N66	15	5	DFT-16QAM	L	Edge_1RB_Right	15.81	PC3	PASS
N66	15	5	DFT-QPSK	M	Outer_Full	16.05	PC3	PASS
N66	15	5	DFT-QPSK	M	Inner_Full	16.01	PC3	PASS
N66	15	5	DFT-QPSK	M	Edge_1RB_Left	16.26	PC3	PASS
N66	15	5	DFT-QPSK	M	Edge_1RB_Right	16.25	PC3	PASS
N66	15	5	DFT-16QAM	M	Outer_Full	15.96	PC3	PASS
N66	15	5	DFT-16QAM	M	Inner_Full	15.97	PC3	PASS
N66	15	5	DFT-16QAM	M	Edge_1RB_Left	16.25	PC3	PASS
N66	15	5	DFT-16QAM	M	Edge_1RB_Right	16.22	PC3	PASS
N66	15	5	DFT-QPSK	H	Outer_Full	15.87	PC3	PASS
N66	15	5	DFT-QPSK	H	Inner_Full	15.79	PC3	PASS
N66	15	5	DFT-QPSK	H	Edge_1RB_Left	15.83	PC3	PASS
N66	15	5	DFT-QPSK	H	Edge_1RB_Right	15.89	PC3	PASS
N66	15	5	DFT-16QAM	H	Outer_Full	15.91	PC3	PASS

N66	15	5	DFT-16QAM	H	Inner_Full	15.76	PC3	PASS
N66	15	5	DFT-16QAM	H	Edge_1RB_Left	16.06	PC3	PASS
N66	15	5	DFT-16QAM	H	Edge_1RB_Right	16.11	PC3	PASS
N66	15	10	DFT-QPSK	L	Outer_Full	16.07	PC3	PASS
N66	15	10	DFT-QPSK	L	Inner_Full	16.03	PC3	PASS
N66	15	10	DFT-QPSK	L	Edge_1RB_Left	16.42	PC3	PASS
N66	15	10	DFT-QPSK	L	Edge_1RB_Right	16.28	PC3	PASS
N66	15	10	DFT-16QAM	L	Outer_Full	16.02	PC3	PASS
N66	15	10	DFT-16QAM	L	Inner_Full	16.02	PC3	PASS
N66	15	10	DFT-16QAM	L	Edge_1RB_Left	16.20	PC3	PASS
N66	15	10	DFT-16QAM	L	Edge_1RB_Right	16.06	PC3	PASS
N66	15	10	DFT-QPSK	M	Outer_Full	16.07	PC3	PASS
N66	15	10	DFT-QPSK	M	Inner_Full	16.06	PC3	PASS
N66	15	10	DFT-QPSK	M	Edge_1RB_Left	16.02	PC3	PASS
N66	15	10	DFT-QPSK	M	Edge_1RB_Right	16.03	PC3	PASS
N66	15	10	DFT-16QAM	M	Outer_Full	16.08	PC3	PASS
N66	15	10	DFT-16QAM	M	Inner_Full	16.00	PC3	PASS
N66	15	10	DFT-16QAM	M	Edge_1RB_Left	15.92	PC3	PASS
N66	15	10	DFT-16QAM	M	Edge_1RB_Right	15.90	PC3	PASS
N66	15	10	DFT-QPSK	H	Outer_Full	15.74	PC3	PASS
N66	15	10	DFT-QPSK	H	Inner_Full	15.72	PC3	PASS
N66	15	10	DFT-QPSK	H	Edge_1RB_Left	15.47	PC3	PASS
N66	15	10	DFT-QPSK	H	Edge_1RB_Right	15.45	PC3	PASS
N66	15	10	DFT-16QAM	H	Outer_Full	15.81	PC3	PASS
N66	15	10	DFT-16QAM	H	Inner_Full	15.72	PC3	PASS
N66	15	10	DFT-16QAM	H	Edge_1RB_Left	15.70	PC3	PASS
N66	15	10	DFT-16QAM	H	Edge_1RB_Right	15.73	PC3	PASS
N66	15	15	DFT-QPSK	L	Outer_Full	16.16	PC3	PASS
N66	15	15	DFT-QPSK	L	Inner_Full	16.09	PC3	PASS
N66	15	15	DFT-QPSK	L	Edge_1RB_Left	16.22	PC3	PASS
N66	15	15	DFT-QPSK	L	Edge_1RB_Right	16.16	PC3	PASS
N66	15	15	DFT-16QAM	L	Outer_Full	16.15	PC3	PASS
N66	15	15	DFT-16QAM	L	Inner_Full	16.04	PC3	PASS
N66	15	15	DFT-16QAM	L	Edge_1RB_Left	15.98	PC3	PASS
N66	15	15	DFT-16QAM	L	Edge_1RB_Right	15.88	PC3	PASS
N66	15	15	DFT-QPSK	M	Outer_Full	16.10	PC3	PASS
N66	15	15	DFT-QPSK	M	Inner_Full	16.09	PC3	PASS
N66	15	15	DFT-QPSK	M	Edge_1RB_Left	16.18	PC3	PASS
N66	15	15	DFT-QPSK	M	Edge_1RB_Right	16.12	PC3	PASS
N66	15	15	DFT-16QAM	M	Outer_Full	16.05	PC3	PASS
N66	15	15	DFT-16QAM	M	Inner_Full	16.07	PC3	PASS
N66	15	15	DFT-16QAM	M	Edge_1RB_Left	16.11	PC3	PASS

N66	15	15	DFT-16QAM	M	Edge_1RB_Right	16.04	PC3	PASS
N66	15	15	DFT-QPSK	H	Outer_Full	15.90	PC3	PASS
N66	15	15	DFT-QPSK	H	Inner_Full	15.82	PC3	PASS
N66	15	15	DFT-QPSK	H	Edge_1RB_Left	16.13	PC3	PASS
N66	15	15	DFT-QPSK	H	Edge_1RB_Right	16.10	PC3	PASS
N66	15	15	DFT-16QAM	H	Outer_Full	15.83	PC3	PASS
N66	15	15	DFT-16QAM	H	Inner_Full	15.85	PC3	PASS
N66	15	15	DFT-16QAM	H	Edge_1RB_Left	16.22	PC3	PASS
N66	15	15	DFT-16QAM	H	Edge_1RB_Right	16.21	PC3	PASS
N66	15	20	DFT-QPSK	L	Outer_Full	16.03	PC3	PASS
N66	15	20	DFT-QPSK	L	Inner_Full	16.02	PC3	PASS
N66	15	20	DFT-QPSK	L	Edge_1RB_Left	16.30	PC3	PASS
N66	15	20	DFT-QPSK	L	Edge_1RB_Right	16.24	PC3	PASS
N66	15	20	DFT-16QAM	L	Outer_Full	16.01	PC3	PASS
N66	15	20	DFT-16QAM	L	Inner_Full	16.06	PC3	PASS
N66	15	20	DFT-16QAM	L	Edge_1RB_Left	16.25	PC3	PASS
N66	15	20	DFT-16QAM	L	Edge_1RB_Right	16.17	PC3	PASS
N66	15	20	DFT-QPSK	M	Outer_Full	16.09	PC3	PASS
N66	15	20	DFT-QPSK	M	Inner_Full	16.11	PC3	PASS
N66	15	20	DFT-QPSK	M	Edge_1RB_Left	16.65	PC3	PASS
N66	15	20	DFT-QPSK	M	Edge_1RB_Right	16.15	PC3	PASS
N66	15	20	DFT-16QAM	M	Outer_Full	16.10	PC3	PASS
N66	15	20	DFT-16QAM	M	Inner_Full	16.04	PC3	PASS
N66	15	20	DFT-16QAM	M	Edge_1RB_Left	16.23	PC3	PASS
N66	15	20	DFT-16QAM	M	Edge_1RB_Right	16.59	PC3	PASS
N66	15	20	DFT-QPSK	H	Outer_Full	15.82	PC3	PASS
N66	15	20	DFT-QPSK	H	Inner_Full	15.85	PC3	PASS
N66	15	20	DFT-QPSK	H	Edge_1RB_Left	15.96	PC3	PASS
N66	15	20	DFT-QPSK	H	Edge_1RB_Right	15.97	PC3	PASS
N66	15	20	DFT-16QAM	H	Outer_Full	15.83	PC3	PASS
N66	15	20	DFT-16QAM	H	Inner_Full	15.88	PC3	PASS
N66	15	20	DFT-16QAM	H	Edge_1RB_Left	15.89	PC3	PASS
N66	15	20	DFT-16QAM	H	Edge_1RB_Right	15.85	PC3	PASS

5G NR(P2): N77_3450-3550MHz

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N77-3450-3550	30	10	DFT-QPSK	L	Outer_Full	19.93	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Inner_Full	19.85	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Edge_1RB_Left	20.00	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Edge_1RB_Right	19.99	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	L	Outer_Full	19.88	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	L	Inner_Full	19.94	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	L	Edge_1RB_Left	20.26	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	L	Edge_1RB_Right	20.24	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Outer_Full	20.01	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Inner_Full	19.96	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Edge_1RB_Left	20.06	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Edge_1RB_Right	19.99	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	M	Outer_Full	20.17	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	M	Inner_Full	20.03	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	M	Edge_1RB_Left	20.09	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	M	Edge_1RB_Right	20.03	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Outer_Full	19.59	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Inner_Full	19.62	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Edge_1RB_Left	19.64	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Edge_1RB_Right	19.54	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	H	Outer_Full	19.54	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	H	Inner_Full	19.56	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	H	Edge_1RB_Left	19.68	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	H	Edge_1RB_Right	19.57	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Outer_Full	19.93	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Inner_Full	19.87	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Edge_1RB_Left	19.61	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Edge_1RB_Right	19.65	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	L	Outer_Full	19.90	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	L	Inner_Full	20.00	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	L	Edge_1RB_Left	19.91	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	L	Edge_1RB_Right	19.96	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Outer_Full	20.09	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Inner_Full	19.91	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Edge_1RB_Left	20.06	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Edge_1RB_Right	19.99	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	M	Outer_Full	20.02	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	M	Inner_Full	20.08	PC2	PASS

N77-3450-3550	30	15	DFT-16QAM	M	Edge_1RB_Left	19.68	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	M	Edge_1RB_Right	19.60	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Outer_Full	19.71	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Inner_Full	19.54	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Edge_1RB_Left	19.72	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Edge_1RB_Right	19.63	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	H	Outer_Full	19.72	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	H	Inner_Full	19.56	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	H	Edge_1RB_Left	19.52	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	H	Edge_1RB_Right	19.45	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Outer_Full	20.03	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Inner_Full	19.91	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Edge_1RB_Left	19.83	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Edge_1RB_Right	20.00	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	L	Outer_Full	19.95	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	L	Inner_Full	19.95	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	L	Edge_1RB_Left	20.30	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	L	Edge_1RB_Right	20.24	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Outer_Full	20.06	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Inner_Full	20.02	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Edge_1RB_Left	20.04	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Edge_1RB_Right	19.96	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	M	Outer_Full	19.94	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	M	Inner_Full	20.05	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	M	Edge_1RB_Left	20.10	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	M	Edge_1RB_Right	19.97	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Outer_Full	19.59	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Inner_Full	19.57	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Edge_1RB_Left	19.71	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Edge_1RB_Right	19.53	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	H	Outer_Full	19.60	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	H	Inner_Full	19.57	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	H	Edge_1RB_Left	19.63	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	H	Edge_1RB_Right	19.51	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Outer_Full	19.97	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Inner_Full	20.00	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Edge_1RB_Left	19.86	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Edge_1RB_Right	19.95	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	L	Outer_Full	19.96	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	L	Inner_Full	20.13	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	L	Edge_1RB_Left	20.07	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	L	Edge_1RB_Right	20.16	PC2	PASS

N77-3450-3550	30	40	DFT-QPSK	M	Outer_Full	20.03	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Inner_Full	19.98	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Edge_1RB_Left	20.21	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Edge_1RB_Right	19.92	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	M	Outer_Full	19.97	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	M	Inner_Full	20.01	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	M	Edge_1RB_Left	19.72	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	M	Edge_1RB_Right	19.52	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Outer_Full	19.70	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Inner_Full	19.72	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Edge_1RB_Left	19.76	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Edge_1RB_Right	19.53	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	H	Outer_Full	19.70	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	H	Inner_Full	19.73	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	H	Edge_1RB_Left	19.76	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	H	Edge_1RB_Right	19.49	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Outer_Full	20.01	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Inner_Full	19.97	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Edge_1RB_Left	19.87	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Edge_1RB_Right	19.89	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	L	Outer_Full	20.04	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	L	Inner_Full	20.12	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	L	Edge_1RB_Left	20.17	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	L	Edge_1RB_Right	20.16	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Outer_Full	20.11	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Inner_Full	20.05	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Edge_1RB_Left	20.24	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Edge_1RB_Right	20.03	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	M	Outer_Full	20.02	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	M	Inner_Full	20.03	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	M	Edge_1RB_Left	20.18	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	M	Edge_1RB_Right	19.91	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Outer_Full	19.83	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Inner_Full	19.78	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Edge_1RB_Left	19.88	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Edge_1RB_Right	19.62	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	H	Outer_Full	19.75	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	H	Inner_Full	19.79	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	H	Edge_1RB_Left	19.94	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	H	Edge_1RB_Right	19.60	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Outer_Full	19.99	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Inner_Full	20.11	PC2	PASS

N77-3450-3550	30	60	DFT-QPSK	L	Edge_1RB_Left	19.82	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Edge_1RB_Right	19.75	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	L	Outer_Full	20.06	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	L	Inner_Full	20.18	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	L	Edge_1RB_Left	19.91	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	L	Edge_1RB_Right	19.88	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Outer_Full	20.02	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Inner_Full	19.97	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Edge_1RB_Left	20.12	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Edge_1RB_Right	19.80	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	M	Outer_Full	20.05	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	M	Inner_Full	20.08	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	M	Edge_1RB_Left	19.80	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	M	Edge_1RB_Right	19.48	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Outer_Full	19.89	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Inner_Full	19.76	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Edge_1RB_Left	20.01	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Edge_1RB_Right	19.65	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	H	Outer_Full	19.90	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	H	Inner_Full	19.88	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	H	Edge_1RB_Left	19.90	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	H	Edge_1RB_Right	19.57	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Outer_Full	20.09	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Inner_Full	20.09	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Edge_1RB_Left	20.08	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Edge_1RB_Right	19.79	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	L	Outer_Full	19.98	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	L	Inner_Full	20.18	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	L	Edge_1RB_Left	20.37	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	L	Edge_1RB_Right	20.14	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Outer_Full	20.12	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Inner_Full	20.04	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Edge_1RB_Left	20.17	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Edge_1RB_Right	19.92	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	M	Outer_Full	20.10	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	M	Inner_Full	20.08	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	M	Edge_1RB_Left	20.12	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	M	Edge_1RB_Right	19.82	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Outer_Full	19.98	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Inner_Full	19.92	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Edge_1RB_Left	20.21	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Edge_1RB_Right	19.77	PC2	PASS

N77-3450-3550	30	80	DFT-16QAM	H	Outer_Full	19.94	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	H	Inner_Full	20.05	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	H	Edge_1RB_Left	20.20	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	H	Edge_1RB_Right	19.76	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Outer_Full	20.09	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Inner_Full	20.11	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Edge_1RB_Left	19.99	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Edge_1RB_Right	19.64	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	L	Outer_Full	20.09	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	L	Inner_Full	20.18	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	L	Edge_1RB_Left	20.07	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	L	Edge_1RB_Right	19.82	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Outer_Full	20.08	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Inner_Full	20.10	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Edge_1RB_Left	20.05	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Edge_1RB_Right	19.71	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	M	Outer_Full	20.11	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	M	Inner_Full	20.13	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	M	Edge_1RB_Left	19.78	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	M	Edge_1RB_Right	19.45	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Outer_Full	20.10	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Inner_Full	20.05	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Edge_1RB_Left	20.06	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Edge_1RB_Right	19.74	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	H	Outer_Full	20.14	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	H	Inner_Full	20.12	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	H	Edge_1RB_Left	19.90	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	H	Edge_1RB_Right	19.64	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	L	Outer_Full	20.11	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	L	Inner_Full	20.09	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	L	Edge_1RB_Left	19.97	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	L	Edge_1RB_Right	19.66	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	L	Outer_Full	20.07	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	L	Inner_Full	20.20	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	L	Edge_1RB_Left	20.22	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	L	Edge_1RB_Right	19.92	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Outer_Full	20.10	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Inner_Full	20.08	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Edge_1RB_Left	19.95	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Edge_1RB_Right	19.65	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	M	Outer_Full	20.14	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	M	Inner_Full	20.17	PC2	PASS

N77-3450-3550	30	100	DFT-16QAM	M	Edge_1RB_Left	20.22	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	M	Edge_1RB_Right	19.96	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	H	Outer_Full	20.37	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	H	Inner_Full	20.09	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	H	Edge_1RB_Left	19.98	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	H	Edge_1RB_Right	19.64	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	H	Outer_Full	20.07	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	H	Inner_Full	20.16	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	H	Edge_1RB_Left	20.24	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	H	Edge_1RB_Right	19.95	PC2	PASS

5G NR(P2): N77_3700-3980MHz

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N77-3700-3980	30	10	DFT-QPSK	L	Outer_Full	19.70	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Inner_Full	19.63	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Edge_1RB_Left	19.63	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Edge_1RB_Right	19.76	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	L	Outer_Full	19.65	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	L	Inner_Full	19.75	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	L	Edge_1RB_Left	19.94	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	L	Edge_1RB_Right	20.08	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Outer_Full	20.21	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Inner_Full	20.22	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Edge_1RB_Left	20.14	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Edge_1RB_Right	20.19	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	M	Outer_Full	20.14	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	M	Inner_Full	20.13	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	M	Edge_1RB_Left	20.20	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	M	Edge_1RB_Right	20.24	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Outer_Full	20.33	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Inner_Full	20.28	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Edge_1RB_Left	20.36	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Edge_1RB_Right	20.36	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	H	Outer_Full	20.30	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	H	Inner_Full	20.42	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	H	Edge_1RB_Left	20.35	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	H	Edge_1RB_Right	20.34	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Outer_Full	19.86	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Inner_Full	19.71	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Edge_1RB_Left	19.38	PC2	PASS

N77-3700-3980	30	15	DFT-QPSK	L	Edge_1RB_Right	19.57	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	L	Outer_Full	19.75	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	L	Inner_Full	19.68	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	L	Edge_1RB_Left	19.62	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	L	Edge_1RB_Right	19.79	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Outer_Full	20.27	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Inner_Full	20.17	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Edge_1RB_Left	20.14	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Edge_1RB_Right	20.23	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	M	Outer_Full	20.14	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	M	Inner_Full	20.23	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	M	Edge_1RB_Left	19.78	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	M	Edge_1RB_Right	19.86	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Outer_Full	20.41	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Inner_Full	20.26	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Edge_1RB_Left	20.36	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Edge_1RB_Right	20.41	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	H	Outer_Full	20.46	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	H	Inner_Full	20.36	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	H	Edge_1RB_Left	20.10	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	H	Edge_1RB_Right	20.20	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Outer_Full	19.80	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Inner_Full	19.73	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Edge_1RB_Left	19.57	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Edge_1RB_Right	19.79	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	L	Outer_Full	19.71	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	L	Inner_Full	19.78	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	L	Edge_1RB_Left	19.98	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	L	Edge_1RB_Right	20.21	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Outer_Full	20.21	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Inner_Full	20.12	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Edge_1RB_Left	20.11	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Edge_1RB_Right	20.21	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	M	Outer_Full	20.10	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	M	Inner_Full	20.16	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	M	Edge_1RB_Left	20.17	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	M	Edge_1RB_Right	20.23	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Outer_Full	20.35	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Inner_Full	20.30	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Edge_1RB_Left	20.21	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Edge_1RB_Right	20.40	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	H	Outer_Full	20.39	PC2	PASS

N77-3700-3980	30	20	DFT-16QAM	H	Inner_Full	20.34	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	H	Edge_1RB_Left	20.18	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	H	Edge_1RB_Right	20.39	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Outer_Full	19.79	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Inner_Full	19.74	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Edge_1RB_Left	19.57	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Edge_1RB_Right	19.95	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	L	Outer_Full	19.81	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	L	Inner_Full	19.87	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	L	Edge_1RB_Left	19.71	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	L	Edge_1RB_Right	20.12	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Outer_Full	20.23	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Inner_Full	20.16	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Edge_1RB_Left	20.15	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Edge_1RB_Right	20.23	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	M	Outer_Full	20.17	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	M	Inner_Full	20.27	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	M	Edge_1RB_Left	19.63	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	M	Edge_1RB_Right	19.77	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Outer_Full	20.22	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Inner_Full	20.15	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Edge_1RB_Left	19.95	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Edge_1RB_Right	20.34	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	H	Outer_Full	20.29	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	H	Inner_Full	20.26	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	H	Edge_1RB_Left	19.99	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	H	Edge_1RB_Right	20.43	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Outer_Full	19.96	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Inner_Full	19.87	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Edge_1RB_Left	19.64	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Edge_1RB_Right	20.00	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	L	Outer_Full	19.97	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	L	Inner_Full	19.99	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	L	Edge_1RB_Left	19.94	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	L	Edge_1RB_Right	20.30	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Outer_Full	20.24	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Inner_Full	20.24	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Edge_1RB_Left	20.26	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Edge_1RB_Right	20.31	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	M	Outer_Full	20.21	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	M	Inner_Full	20.29	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	M	Edge_1RB_Left	20.17	PC2	PASS

N77-3700-3980	30	50	DFT-16QAM	M	Edge_1RB_Right	20.27	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Outer_Full	20.31	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Inner_Full	20.11	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Edge_1RB_Left	20.03	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Edge_1RB_Right	20.43	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	H	Outer_Full	20.21	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	H	Inner_Full	20.11	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	H	Edge_1RB_Left	20.03	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	H	Edge_1RB_Right	20.42	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Outer_Full	19.90	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Inner_Full	19.96	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Edge_1RB_Left	19.58	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Edge_1RB_Right	19.80	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	L	Outer_Full	19.91	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	L	Inner_Full	20.00	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	L	Edge_1RB_Left	19.63	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	L	Edge_1RB_Right	19.89	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Outer_Full	20.18	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Inner_Full	20.20	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Edge_1RB_Left	20.12	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Edge_1RB_Right	20.21	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	M	Outer_Full	20.20	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	M	Inner_Full	20.29	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	M	Edge_1RB_Left	19.80	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	M	Edge_1RB_Right	19.90	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Outer_Full	20.23	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Inner_Full	20.06	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Edge_1RB_Left	19.98	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Edge_1RB_Right	20.44	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	H	Outer_Full	20.17	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	H	Inner_Full	20.12	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	H	Edge_1RB_Left	19.83	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	H	Edge_1RB_Right	20.36	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Outer_Full	20.35	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Inner_Full	20.39	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Edge_1RB_Left	20.10	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Edge_1RB_Right	20.38	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	L	Outer_Full	20.28	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	L	Inner_Full	20.42	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	L	Edge_1RB_Left	20.40	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	L	Edge_1RB_Right	20.47	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Outer_Full	20.29	PC2	PASS

N77-3700-3980	30	80	DFT-QPSK	M	Inner_Full	20.25	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Edge_1RB_Left	20.13	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Edge_1RB_Right	20.38	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	M	Outer_Full	20.24	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	M	Inner_Full	20.28	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	M	Edge_1RB_Left	20.10	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	M	Edge_1RB_Right	20.33	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Outer_Full	20.34	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Inner_Full	20.23	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Edge_1RB_Left	20.25	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Edge_1RB_Right	20.61	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	H	Outer_Full	20.36	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	H	Inner_Full	20.24	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	H	Edge_1RB_Left	20.20	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	H	Edge_1RB_Right	20.61	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Outer_Full	20.43	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Inner_Full	20.37	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Edge_1RB_Left	20.00	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Edge_1RB_Right	20.11	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	L	Outer_Full	20.42	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	L	Inner_Full	20.46	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	L	Edge_1RB_Left	20.13	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	L	Edge_1RB_Right	20.28	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Outer_Full	20.28	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Inner_Full	20.20	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Edge_1RB_Left	19.91	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Edge_1RB_Right	20.25	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	M	Outer_Full	20.23	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	M	Inner_Full	20.27	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	M	Edge_1RB_Left	19.58	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	M	Edge_1RB_Right	19.87	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Outer_Full	20.33	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Inner_Full	20.14	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Edge_1RB_Left	20.15	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Edge_1RB_Right	20.58	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	H	Outer_Full	20.36	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	H	Inner_Full	20.30	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	H	Edge_1RB_Left	20.01	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	H	Edge_1RB_Right	20.49	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Outer_Full	20.38	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Inner_Full	20.69	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Edge_1RB_Left	19.96	PC2	PASS

N77-3700-3980	30	100	DFT-QPSK	L	Edge_1RB_Right	20.10	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	L	Outer_Full	20.40	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	L	Inner_Full	20.43	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	L	Edge_1RB_Left	20.16	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	L	Edge_1RB_Right	20.35	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Outer_Full	20.22	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Inner_Full	20.21	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Edge_1RB_Left	19.84	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Edge_1RB_Right	20.09	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	M	Outer_Full	20.24	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	M	Inner_Full	20.28	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	M	Edge_1RB_Left	19.73	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	M	Edge_1RB_Right	20.14	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Outer_Full	20.31	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Inner_Full	20.20	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Edge_1RB_Left	19.99	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Edge_1RB_Right	20.44	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	H	Outer_Full	20.36	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	H	Inner_Full	20.28	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	H	Edge_1RB_Left	19.96	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	H	Edge_1RB_Right	20.40	PC2	PASS

5G NR(P3): Hotspot ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N2	15	5	DFT-QPSK	L	Outer_Full	20.35	PC3	PASS
N2	15	5	DFT-QPSK	L	Inner_Full	20.42	PC3	PASS
N2	15	5	DFT-QPSK	L	Edge_1RB_Left	20.57	PC3	PASS
N2	15	5	DFT-QPSK	L	Edge_1RB_Right	20.59	PC3	PASS
N2	15	5	DFT-16QAM	L	Outer_Full	20.25	PC3	PASS
N2	15	5	DFT-16QAM	L	Inner_Full	20.41	PC3	PASS
N2	15	5	DFT-16QAM	L	Edge_1RB_Left	20.07	PC3	PASS
N2	15	5	DFT-16QAM	L	Edge_1RB_Right	20.09	PC3	PASS
N2	15	5	DFT-QPSK	M	Outer_Full	20.41	PC3	PASS
N2	15	5	DFT-QPSK	M	Inner_Full	20.42	PC3	PASS
N2	15	5	DFT-QPSK	M	Edge_1RB_Left	20.53	PC3	PASS
N2	15	5	DFT-QPSK	M	Edge_1RB_Right	20.55	PC3	PASS
N2	15	5	DFT-16QAM	M	Outer_Full	20.32	PC3	PASS
N2	15	5	DFT-16QAM	M	Inner_Full	20.31	PC3	PASS
N2	15	5	DFT-16QAM	M	Edge_1RB_Left	20.51	PC3	PASS

N2	15	5	DFT-16QAM	M	Edge_1RB_Right	20.52	PC3	PASS
N2	15	5	DFT-QPSK	H	Outer_Full	20.25	PC3	PASS
N2	15	5	DFT-QPSK	H	Inner_Full	20.26	PC3	PASS
N2	15	5	DFT-QPSK	H	Edge_1RB_Left	20.24	PC3	PASS
N2	15	5	DFT-QPSK	H	Edge_1RB_Right	20.28	PC3	PASS
N2	15	5	DFT-16QAM	H	Outer_Full	20.34	PC3	PASS
N2	15	5	DFT-16QAM	H	Inner_Full	20.19	PC3	PASS
N2	15	5	DFT-16QAM	H	Edge_1RB_Left	20.46	PC3	PASS
N2	15	5	DFT-16QAM	H	Edge_1RB_Right	20.51	PC3	PASS
N2	15	10	DFT-QPSK	L	Outer_Full	20.31	PC3	PASS
N2	15	10	DFT-QPSK	L	Inner_Full	20.32	PC3	PASS
N2	15	10	DFT-QPSK	L	Edge_1RB_Left	20.56	PC3	PASS
N2	15	10	DFT-QPSK	L	Edge_1RB_Right	20.55	PC3	PASS
N2	15	10	DFT-16QAM	L	Outer_Full	20.29	PC3	PASS
N2	15	10	DFT-16QAM	L	Inner_Full	20.34	PC3	PASS
N2	15	10	DFT-16QAM	L	Edge_1RB_Left	20.39	PC3	PASS
N2	15	10	DFT-16QAM	L	Edge_1RB_Right	20.37	PC3	PASS
N2	15	10	DFT-QPSK	M	Outer_Full	20.36	PC3	PASS
N2	15	10	DFT-QPSK	M	Inner_Full	20.37	PC3	PASS
N2	15	10	DFT-QPSK	M	Edge_1RB_Left	20.30	PC3	PASS
N2	15	10	DFT-QPSK	M	Edge_1RB_Right	20.31	PC3	PASS
N2	15	10	DFT-16QAM	M	Outer_Full	20.43	PC3	PASS
N2	15	10	DFT-16QAM	M	Inner_Full	20.33	PC3	PASS
N2	15	10	DFT-16QAM	M	Edge_1RB_Left	20.18	PC3	PASS
N2	15	10	DFT-16QAM	M	Edge_1RB_Right	20.17	PC3	PASS
N2	15	10	DFT-QPSK	H	Outer_Full	20.21	PC3	PASS
N2	15	10	DFT-QPSK	H	Inner_Full	20.16	PC3	PASS
N2	15	10	DFT-QPSK	H	Edge_1RB_Left	19.82	PC3	PASS
N2	15	10	DFT-QPSK	H	Edge_1RB_Right	19.91	PC3	PASS
N2	15	10	DFT-16QAM	H	Outer_Full	20.25	PC3	PASS
N2	15	10	DFT-16QAM	H	Inner_Full	20.17	PC3	PASS
N2	15	10	DFT-16QAM	H	Edge_1RB_Left	20.08	PC3	PASS
N2	15	10	DFT-16QAM	H	Edge_1RB_Right	20.16	PC3	PASS
N2	15	15	DFT-QPSK	L	Outer_Full	20.40	PC3	PASS
N2	15	15	DFT-QPSK	L	Inner_Full	20.38	PC3	PASS
N2	15	15	DFT-QPSK	L	Edge_1RB_Left	20.34	PC3	PASS
N2	15	15	DFT-QPSK	L	Edge_1RB_Right	20.22	PC3	PASS
N2	15	15	DFT-16QAM	L	Outer_Full	20.40	PC3	PASS
N2	15	15	DFT-16QAM	L	Inner_Full	20.30	PC3	PASS
N2	15	15	DFT-16QAM	L	Edge_1RB_Left	20.05	PC3	PASS
N2	15	15	DFT-16QAM	L	Edge_1RB_Right	19.92	PC3	PASS
N2	15	15	DFT-QPSK	M	Outer_Full	20.40	PC3	PASS

N2	15	15	DFT-QPSK	M	Inner_Full	20.39	PC3	PASS
N2	15	15	DFT-QPSK	M	Edge_1RB_Left	20.35	PC3	PASS
N2	15	15	DFT-QPSK	M	Edge_1RB_Right	20.36	PC3	PASS
N2	15	15	DFT-16QAM	M	Outer_Full	20.42	PC3	PASS
N2	15	15	DFT-16QAM	M	Inner_Full	20.41	PC3	PASS
N2	15	15	DFT-16QAM	M	Edge_1RB_Left	20.27	PC3	PASS
N2	15	15	DFT-16QAM	M	Edge_1RB_Right	20.21	PC3	PASS
N2	15	15	DFT-QPSK	H	Outer_Full	20.28	PC3	PASS
N2	15	15	DFT-QPSK	H	Inner_Full	20.26	PC3	PASS
N2	15	15	DFT-QPSK	H	Edge_1RB_Left	20.46	PC3	PASS
N2	15	15	DFT-QPSK	H	Edge_1RB_Right	20.48	PC3	PASS
N2	15	15	DFT-16QAM	H	Outer_Full	20.27	PC3	PASS
N2	15	15	DFT-16QAM	H	Inner_Full	20.31	PC3	PASS
N2	15	15	DFT-16QAM	H	Edge_1RB_Left	20.54	PC3	PASS
N2	15	15	DFT-16QAM	H	Edge_1RB_Right	20.55	PC3	PASS
N2	15	20	DFT-QPSK	L	Outer_Full	20.36	PC3	PASS
N2	15	20	DFT-QPSK	L	Inner_Full	20.40	PC3	PASS
N2	15	20	DFT-QPSK	L	Edge_1RB_Left	20.56	PC3	PASS
N2	15	20	DFT-QPSK	L	Edge_1RB_Right	20.48	PC3	PASS
N2	15	20	DFT-16QAM	L	Outer_Full	20.37	PC3	PASS
N2	15	20	DFT-16QAM	L	Inner_Full	20.44	PC3	PASS
N2	15	20	DFT-16QAM	L	Edge_1RB_Left	20.51	PC3	PASS
N2	15	20	DFT-16QAM	L	Edge_1RB_Right	20.44	PC3	PASS
N2	15	20	DFT-QPSK	M	Outer_Full	20.38	PC3	PASS
N2	15	20	DFT-QPSK	M	Inner_Full	20.45	PC3	PASS
N2	15	20	DFT-QPSK	M	Edge_1RB_Left	20.92	PC3	PASS
N2	15	20	DFT-QPSK	M	Edge_1RB_Right	20.45	PC3	PASS
N2	15	20	DFT-16QAM	M	Outer_Full	20.42	PC3	PASS
N2	15	20	DFT-16QAM	M	Inner_Full	20.38	PC3	PASS
N2	15	20	DFT-16QAM	M	Edge_1RB_Left	20.87	PC3	PASS
N2	15	20	DFT-16QAM	M	Edge_1RB_Right	20.47	PC3	PASS
N2	15	20	DFT-QPSK	H	Outer_Full	20.29	PC3	PASS
N2	15	20	DFT-QPSK	H	Inner_Full	20.29	PC3	PASS
N2	15	20	DFT-QPSK	H	Edge_1RB_Left	20.38	PC3	PASS
N2	15	20	DFT-QPSK	H	Edge_1RB_Right	20.37	PC3	PASS
N2	15	20	DFT-16QAM	H	Outer_Full	20.23	PC3	PASS
N2	15	20	DFT-16QAM	H	Inner_Full	20.33	PC3	PASS
N2	15	20	DFT-16QAM	H	Edge_1RB_Left	20.28	PC3	PASS
N2	15	20	DFT-16QAM	H	Edge_1RB_Right	20.25	PC3	PASS

5G NR(P3):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N25	15	5	DFT-QPSK	L	Outer_Full	20.38	PC3	PASS
N25	15	5	DFT-QPSK	L	Inner_Full	20.47	PC3	PASS
N25	15	5	DFT-QPSK	L	Edge_1RB_Left	20.67	PC3	PASS
N25	15	5	DFT-QPSK	L	Edge_1RB_Right	20.65	PC3	PASS
N25	15	5	DFT-16QAM	L	Outer_Full	20.31	PC3	PASS
N25	15	5	DFT-16QAM	L	Inner_Full	20.49	PC3	PASS
N25	15	5	DFT-16QAM	L	Edge_1RB_Left	20.14	PC3	PASS
N25	15	5	DFT-16QAM	L	Edge_1RB_Right	20.14	PC3	PASS
N25	15	5	DFT-QPSK	M	Outer_Full	20.39	PC3	PASS
N25	15	5	DFT-QPSK	M	Inner_Full	20.37	PC3	PASS
N25	15	5	DFT-QPSK	M	Edge_1RB_Left	20.57	PC3	PASS
N25	15	5	DFT-QPSK	M	Edge_1RB_Right	20.60	PC3	PASS
N25	15	5	DFT-16QAM	M	Outer_Full	20.34	PC3	PASS
N25	15	5	DFT-16QAM	M	Inner_Full	20.35	PC3	PASS
N25	15	5	DFT-16QAM	M	Edge_1RB_Left	20.51	PC3	PASS
N25	15	5	DFT-16QAM	M	Edge_1RB_Right	20.54	PC3	PASS
N25	15	5	DFT-QPSK	H	Outer_Full	20.40	PC3	PASS
N25	15	5	DFT-QPSK	H	Inner_Full	20.46	PC3	PASS
N25	15	5	DFT-QPSK	H	Edge_1RB_Left	20.34	PC3	PASS
N25	15	5	DFT-QPSK	H	Edge_1RB_Right	20.32	PC3	PASS
N25	15	5	DFT-16QAM	H	Outer_Full	20.43	PC3	PASS
N25	15	5	DFT-16QAM	H	Inner_Full	20.30	PC3	PASS
N25	15	5	DFT-16QAM	H	Edge_1RB_Left	20.58	PC3	PASS
N25	15	5	DFT-16QAM	H	Edge_1RB_Right	20.57	PC3	PASS
N25	15	10	DFT-QPSK	L	Outer_Full	20.36	PC3	PASS
N25	15	10	DFT-QPSK	L	Inner_Full	20.37	PC3	PASS
N25	15	10	DFT-QPSK	L	Edge_1RB_Left	20.63	PC3	PASS
N25	15	10	DFT-QPSK	L	Edge_1RB_Right	20.51	PC3	PASS
N25	15	10	DFT-16QAM	L	Outer_Full	20.32	PC3	PASS
N25	15	10	DFT-16QAM	L	Inner_Full	20.36	PC3	PASS
N25	15	10	DFT-16QAM	L	Edge_1RB_Left	20.47	PC3	PASS
N25	15	10	DFT-16QAM	L	Edge_1RB_Right	20.37	PC3	PASS
N25	15	10	DFT-QPSK	M	Outer_Full	20.39	PC3	PASS
N25	15	10	DFT-QPSK	M	Inner_Full	20.42	PC3	PASS
N25	15	10	DFT-QPSK	M	Edge_1RB_Left	20.36	PC3	PASS
N25	15	10	DFT-QPSK	M	Edge_1RB_Right	20.35	PC3	PASS
N25	15	10	DFT-16QAM	M	Outer_Full	20.44	PC3	PASS
N25	15	10	DFT-16QAM	M	Inner_Full	20.34	PC3	PASS

N25	15	10	DFT-16QAM	M	Edge_1RB_Left	20.19	PC3	PASS
N25	15	10	DFT-16QAM	M	Edge_1RB_Right	20.14	PC3	PASS
N25	15	10	DFT-QPSK	H	Outer_Full	20.33	PC3	PASS
N25	15	10	DFT-QPSK	H	Inner_Full	20.33	PC3	PASS
N25	15	10	DFT-QPSK	H	Edge_1RB_Left	19.93	PC3	PASS
N25	15	10	DFT-QPSK	H	Edge_1RB_Right	19.99	PC3	PASS
N25	15	10	DFT-16QAM	H	Outer_Full	20.35	PC3	PASS
N25	15	10	DFT-16QAM	H	Inner_Full	20.26	PC3	PASS
N25	15	10	DFT-16QAM	H	Edge_1RB_Left	20.13	PC3	PASS
N25	15	10	DFT-16QAM	H	Edge_1RB_Right	20.24	PC3	PASS
N25	15	15	DFT-QPSK	L	Outer_Full	20.41	PC3	PASS
N25	15	15	DFT-QPSK	L	Inner_Full	20.36	PC3	PASS
N25	15	15	DFT-QPSK	L	Edge_1RB_Left	20.30	PC3	PASS
N25	15	15	DFT-QPSK	L	Edge_1RB_Right	20.26	PC3	PASS
N25	15	15	DFT-16QAM	L	Outer_Full	20.38	PC3	PASS
N25	15	15	DFT-16QAM	L	Inner_Full	20.30	PC3	PASS
N25	15	15	DFT-16QAM	L	Edge_1RB_Left	20.09	PC3	PASS
N25	15	15	DFT-16QAM	L	Edge_1RB_Right	19.98	PC3	PASS
N25	15	15	DFT-QPSK	M	Outer_Full	20.46	PC3	PASS
N25	15	15	DFT-QPSK	M	Inner_Full	20.43	PC3	PASS
N25	15	15	DFT-QPSK	M	Edge_1RB_Left	20.40	PC3	PASS
N25	15	15	DFT-QPSK	M	Edge_1RB_Right	20.37	PC3	PASS
N25	15	15	DFT-16QAM	M	Outer_Full	20.41	PC3	PASS
N25	15	15	DFT-16QAM	M	Inner_Full	20.42	PC3	PASS
N25	15	15	DFT-16QAM	M	Edge_1RB_Left	20.28	PC3	PASS
N25	15	15	DFT-16QAM	M	Edge_1RB_Right	20.25	PC3	PASS
N25	15	15	DFT-QPSK	H	Outer_Full	20.33	PC3	PASS
N25	15	15	DFT-QPSK	H	Inner_Full	20.29	PC3	PASS
N25	15	15	DFT-QPSK	H	Edge_1RB_Left	20.46	PC3	PASS
N25	15	15	DFT-QPSK	H	Edge_1RB_Right	20.61	PC3	PASS
N25	15	15	DFT-16QAM	H	Outer_Full	20.26	PC3	PASS
N25	15	15	DFT-16QAM	H	Inner_Full	20.39	PC3	PASS
N25	15	15	DFT-16QAM	H	Edge_1RB_Left	20.53	PC3	PASS
N25	15	15	DFT-16QAM	H	Edge_1RB_Right	20.62	PC3	PASS
N25	15	20	DFT-QPSK	L	Outer_Full	20.38	PC3	PASS
N25	15	20	DFT-QPSK	L	Inner_Full	20.41	PC3	PASS
N25	15	20	DFT-QPSK	L	Edge_1RB_Left	20.64	PC3	PASS
N25	15	20	DFT-QPSK	L	Edge_1RB_Right	20.48	PC3	PASS
N25	15	20	DFT-16QAM	L	Outer_Full	20.36	PC3	PASS
N25	15	20	DFT-16QAM	L	Inner_Full	20.44	PC3	PASS
N25	15	20	DFT-16QAM	L	Edge_1RB_Left	20.54	PC3	PASS
N25	15	20	DFT-16QAM	L	Edge_1RB_Right	20.46	PC3	PASS

N25	15	20	DFT-QPSK	M	Outer_Full	20.38	PC3	PASS
N25	15	20	DFT-QPSK	M	Inner_Full	20.89	PC3	PASS
N25	15	20	DFT-QPSK	M	Edge_1RB_Left	20.42	PC3	PASS
N25	15	20	DFT-QPSK	M	Edge_1RB_Right	20.42	PC3	PASS
N25	15	20	DFT-16QAM	M	Outer_Full	20.40	PC3	PASS
N25	15	20	DFT-16QAM	M	Inner_Full	20.35	PC3	PASS
N25	15	20	DFT-16QAM	M	Edge_1RB_Left	20.88	PC3	PASS
N25	15	20	DFT-16QAM	M	Edge_1RB_Right	20.46	PC3	PASS
N25	15	20	DFT-QPSK	H	Outer_Full	20.30	PC3	PASS
N25	15	20	DFT-QPSK	H	Inner_Full	20.28	PC3	PASS
N25	15	20	DFT-QPSK	H	Edge_1RB_Left	20.27	PC3	PASS
N25	15	20	DFT-QPSK	H	Edge_1RB_Right	20.44	PC3	PASS
N25	15	20	DFT-16QAM	H	Outer_Full	20.25	PC3	PASS
N25	15	20	DFT-16QAM	H	Inner_Full	20.34	PC3	PASS
N25	15	20	DFT-16QAM	H	Edge_1RB_Left	20.19	PC3	PASS
N25	15	20	DFT-16QAM	H	Edge_1RB_Right	20.36	PC3	PASS

5G NR(P3):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N41	30	10	DFT-QPSK	L	Outer_Full	21.78	PC2	PASS
N41	30	10	DFT-QPSK	L	Inner_Full	21.87	PC2	PASS
N41	30	10	DFT-QPSK	L	Edge_1RB_Left	21.75	PC2	PASS
N41	30	10	DFT-QPSK	L	Edge_1RB_Right	21.62	PC2	PASS
N41	30	10	DFT-16QAM	L	Outer_Full	21.56	PC2	PASS
N41	30	10	DFT-16QAM	L	Inner_Full	21.65	PC2	PASS
N41	30	10	DFT-16QAM	L	Edge_1RB_Left	21.76	PC2	PASS
N41	30	10	DFT-16QAM	L	Edge_1RB_Right	21.69	PC2	PASS
N41	30	10	DFT-QPSK	M	Outer_Full	21.61	PC2	PASS
N41	30	10	DFT-QPSK	M	Inner_Full	21.66	PC2	PASS
N41	30	10	DFT-QPSK	M	Edge_1RB_Left	21.41	PC2	PASS
N41	30	10	DFT-QPSK	M	Edge_1RB_Right	21.46	PC2	PASS
N41	30	10	DFT-16QAM	M	Outer_Full	21.70	PC2	PASS
N41	30	10	DFT-16QAM	M	Inner_Full	21.62	PC2	PASS
N41	30	10	DFT-16QAM	M	Edge_1RB_Left	21.73	PC2	PASS
N41	30	10	DFT-16QAM	M	Edge_1RB_Right	21.83	PC2	PASS
N41	30	10	DFT-QPSK	H	Outer_Full	21.98	PC2	PASS
N41	30	10	DFT-QPSK	H	Inner_Full	22.02	PC2	PASS
N41	30	10	DFT-QPSK	H	Edge_1RB_Left	21.64	PC2	PASS
N41	30	10	DFT-QPSK	H	Edge_1RB_Right	21.84	PC2	PASS
N41	30	10	DFT-16QAM	H	Outer_Full	22.09	PC2	PASS

N41	30	10	DFT-16QAM	H	Inner_Full	21.87	PC2	PASS
N41	30	10	DFT-16QAM	H	Edge_1RB_Left	21.66	PC2	PASS
N41	30	10	DFT-16QAM	H	Edge_1RB_Right	21.94	PC2	PASS
N41	30	15	DFT-QPSK	L	Outer_Full	21.76	PC2	PASS
N41	30	15	DFT-QPSK	L	Inner_Full	21.76	PC2	PASS
N41	30	15	DFT-QPSK	L	Edge_1RB_Left	21.39	PC2	PASS
N41	30	15	DFT-QPSK	L	Edge_1RB_Right	21.27	PC2	PASS
N41	30	15	DFT-16QAM	L	Outer_Full	21.73	PC2	PASS
N41	30	15	DFT-16QAM	L	Inner_Full	21.68	PC2	PASS
N41	30	15	DFT-16QAM	L	Edge_1RB_Left	21.59	PC2	PASS
N41	30	15	DFT-16QAM	L	Edge_1RB_Right	21.51	PC2	PASS
N41	30	15	DFT-QPSK	M	Outer_Full	21.66	PC2	PASS
N41	30	15	DFT-QPSK	M	Inner_Full	21.64	PC2	PASS
N41	30	15	DFT-QPSK	M	Edge_1RB_Left	21.17	PC2	PASS
N41	30	15	DFT-QPSK	M	Edge_1RB_Right	21.37	PC2	PASS
N41	30	15	DFT-16QAM	M	Outer_Full	21.74	PC2	PASS
N41	30	15	DFT-16QAM	M	Inner_Full	21.67	PC2	PASS
N41	30	15	DFT-16QAM	M	Edge_1RB_Left	21.07	PC2	PASS
N41	30	15	DFT-16QAM	M	Edge_1RB_Right	21.22	PC2	PASS
N41	30	15	DFT-QPSK	H	Outer_Full	21.96	PC2	PASS
N41	30	15	DFT-QPSK	H	Inner_Full	21.96	PC2	PASS
N41	30	15	DFT-QPSK	H	Edge_1RB_Left	21.23	PC2	PASS
N41	30	15	DFT-QPSK	H	Edge_1RB_Right	21.54	PC2	PASS
N41	30	15	DFT-16QAM	H	Outer_Full	21.92	PC2	PASS
N41	30	15	DFT-16QAM	H	Inner_Full	21.89	PC2	PASS
N41	30	15	DFT-16QAM	H	Edge_1RB_Left	21.53	PC2	PASS
N41	30	15	DFT-16QAM	H	Edge_1RB_Right	21.78	PC2	PASS
N41	30	20	DFT-QPSK	L	Outer_Full	21.67	PC2	PASS
N41	30	20	DFT-QPSK	L	Inner_Full	21.72	PC2	PASS
N41	30	20	DFT-QPSK	L	Edge_1RB_Left	21.52	PC2	PASS
N41	30	20	DFT-QPSK	L	Edge_1RB_Right	21.36	PC2	PASS
N41	30	20	DFT-16QAM	L	Outer_Full	21.70	PC2	PASS
N41	30	20	DFT-16QAM	L	Inner_Full	21.68	PC2	PASS
N41	30	20	DFT-16QAM	L	Edge_1RB_Left	21.29	PC2	PASS
N41	30	20	DFT-16QAM	L	Edge_1RB_Right	21.15	PC2	PASS
N41	30	20	DFT-QPSK	M	Outer_Full	21.65	PC2	PASS
N41	30	20	DFT-QPSK	M	Inner_Full	21.65	PC2	PASS
N41	30	20	DFT-QPSK	M	Edge_1RB_Left	21.24	PC2	PASS
N41	30	20	DFT-QPSK	M	Edge_1RB_Right	21.37	PC2	PASS
N41	30	20	DFT-16QAM	M	Outer_Full	21.62	PC2	PASS
N41	30	20	DFT-16QAM	M	Inner_Full	21.55	PC2	PASS
N41	30	20	DFT-16QAM	M	Edge_1RB_Left	21.07	PC2	PASS

N41	30	20	DFT-16QAM	M	Edge_1RB_Right	21.23	PC2	PASS
N41	30	20	DFT-QPSK	H	Outer_Full	21.86	PC2	PASS
N41	30	20	DFT-QPSK	H	Inner_Full	21.87	PC2	PASS
N41	30	20	DFT-QPSK	H	Edge_1RB_Left	21.56	PC2	PASS
N41	30	20	DFT-QPSK	H	Edge_1RB_Right	21.76	PC2	PASS
N41	30	20	DFT-16QAM	H	Outer_Full	21.86	PC2	PASS
N41	30	20	DFT-16QAM	H	Inner_Full	21.81	PC2	PASS
N41	30	20	DFT-16QAM	H	Edge_1RB_Left	21.51	PC2	PASS
N41	30	20	DFT-16QAM	H	Edge_1RB_Right	21.73	PC2	PASS
N41	30	30	DFT-QPSK	L	Outer_Full	21.71	PC2	PASS
N41	30	30	DFT-QPSK	L	Inner_Full	21.68	PC2	PASS
N41	30	30	DFT-QPSK	L	Edge_1RB_Left	21.54	PC2	PASS
N41	30	30	DFT-QPSK	L	Edge_1RB_Right	21.47	PC2	PASS
N41	30	30	DFT-16QAM	L	Outer_Full	21.70	PC2	PASS
N41	30	30	DFT-16QAM	L	Inner_Full	21.68	PC2	PASS
N41	30	30	DFT-16QAM	L	Edge_1RB_Left	21.83	PC2	PASS
N41	30	30	DFT-16QAM	L	Edge_1RB_Right	21.76	PC2	PASS
N41	30	30	DFT-QPSK	M	Outer_Full	21.66	PC2	PASS
N41	30	30	DFT-QPSK	M	Inner_Full	21.67	PC2	PASS
N41	30	30	DFT-QPSK	M	Edge_1RB_Left	21.27	PC2	PASS
N41	30	30	DFT-QPSK	M	Edge_1RB_Right	21.39	PC2	PASS
N41	30	30	DFT-16QAM	M	Outer_Full	21.61	PC2	PASS
N41	30	30	DFT-16QAM	M	Inner_Full	21.63	PC2	PASS
N41	30	30	DFT-16QAM	M	Edge_1RB_Left	21.25	PC2	PASS
N41	30	30	DFT-16QAM	M	Edge_1RB_Right	21.34	PC2	PASS
N41	30	30	DFT-QPSK	H	Outer_Full	21.92	PC2	PASS
N41	30	30	DFT-QPSK	H	Inner_Full	21.88	PC2	PASS
N41	30	30	DFT-QPSK	H	Edge_1RB_Left	21.71	PC2	PASS
N41	30	30	DFT-QPSK	H	Edge_1RB_Right	21.78	PC2	PASS
N41	30	30	DFT-16QAM	H	Outer_Full	21.90	PC2	PASS
N41	30	30	DFT-16QAM	H	Inner_Full	21.89	PC2	PASS
N41	30	30	DFT-16QAM	H	Edge_1RB_Left	21.64	PC2	PASS
N41	30	30	DFT-16QAM	H	Edge_1RB_Right	21.68	PC2	PASS
N41	30	40	DFT-QPSK	L	Outer_Full	21.71	PC2	PASS
N41	30	40	DFT-QPSK	L	Inner_Full	21.73	PC2	PASS
N41	30	40	DFT-QPSK	L	Edge_1RB_Left	21.44	PC2	PASS
N41	30	40	DFT-QPSK	L	Edge_1RB_Right	21.34	PC2	PASS
N41	30	40	DFT-16QAM	L	Outer_Full	21.66	PC2	PASS
N41	30	40	DFT-16QAM	L	Inner_Full	21.73	PC2	PASS
N41	30	40	DFT-16QAM	L	Edge_1RB_Left	21.50	PC2	PASS
N41	30	40	DFT-16QAM	L	Edge_1RB_Right	21.31	PC2	PASS
N41	30	40	DFT-QPSK	M	Outer_Full	21.62	PC2	PASS

N41	30	40	DFT-QPSK	M	Inner_Full	21.67	PC2	PASS
N41	30	40	DFT-QPSK	M	Edge_1RB_Left	21.10	PC2	PASS
N41	30	40	DFT-QPSK	M	Edge_1RB_Right	21.14	PC2	PASS
N41	30	40	DFT-16QAM	M	Outer_Full	21.55	PC2	PASS
N41	30	40	DFT-16QAM	M	Inner_Full	21.64	PC2	PASS
N41	30	40	DFT-16QAM	M	Edge_1RB_Left	21.41	PC2	PASS
N41	30	40	DFT-16QAM	M	Edge_1RB_Right	21.40	PC2	PASS
N41	30	40	DFT-QPSK	H	Outer_Full	21.88	PC2	PASS
N41	30	40	DFT-QPSK	H	Inner_Full	21.91	PC2	PASS
N41	30	40	DFT-QPSK	H	Edge_1RB_Left	21.37	PC2	PASS
N41	30	40	DFT-QPSK	H	Edge_1RB_Right	21.75	PC2	PASS
N41	30	40	DFT-16QAM	H	Outer_Full	21.81	PC2	PASS
N41	30	40	DFT-16QAM	H	Inner_Full	21.93	PC2	PASS
N41	30	40	DFT-16QAM	H	Edge_1RB_Left	20.92	PC2	PASS
N41	30	40	DFT-16QAM	H	Edge_1RB_Right	21.26	PC2	PASS
N41	30	60	DFT-QPSK	L	Outer_Full	21.57	PC2	PASS
N41	30	60	DFT-QPSK	L	Inner_Full	21.64	PC2	PASS
N41	30	60	DFT-QPSK	L	Edge_1RB_Left	21.43	PC2	PASS
N41	30	60	DFT-QPSK	L	Edge_1RB_Right	21.20	PC2	PASS
N41	30	60	DFT-16QAM	L	Outer_Full	21.58	PC2	PASS
N41	30	60	DFT-16QAM	L	Inner_Full	21.60	PC2	PASS
N41	30	60	DFT-16QAM	L	Edge_1RB_Left	21.34	PC2	PASS
N41	30	60	DFT-16QAM	L	Edge_1RB_Right	21.08	PC2	PASS
N41	30	60	DFT-QPSK	M	Outer_Full	21.54	PC2	PASS
N41	30	60	DFT-QPSK	M	Inner_Full	21.62	PC2	PASS
N41	30	60	DFT-QPSK	M	Edge_1RB_Left	21.26	PC2	PASS
N41	30	60	DFT-QPSK	M	Edge_1RB_Right	21.31	PC2	PASS
N41	30	60	DFT-16QAM	M	Outer_Full	21.52	PC2	PASS
N41	30	60	DFT-16QAM	M	Inner_Full	21.61	PC2	PASS
N41	30	60	DFT-16QAM	M	Edge_1RB_Left	21.20	PC2	PASS
N41	30	60	DFT-16QAM	M	Edge_1RB_Right	21.23	PC2	PASS
N41	30	60	DFT-QPSK	H	Outer_Full	21.80	PC2	PASS
N41	30	60	DFT-QPSK	H	Inner_Full	21.86	PC2	PASS
N41	30	60	DFT-QPSK	H	Edge_1RB_Left	21.38	PC2	PASS
N41	30	60	DFT-QPSK	H	Edge_1RB_Right	21.61	PC2	PASS
N41	30	60	DFT-16QAM	H	Outer_Full	21.74	PC2	PASS
N41	30	60	DFT-16QAM	H	Inner_Full	21.85	PC2	PASS
N41	30	60	DFT-16QAM	H	Edge_1RB_Left	21.74	PC2	PASS
N41	30	60	DFT-16QAM	H	Edge_1RB_Right	22.00	PC2	PASS
N41	30	80	DFT-QPSK	L	Outer_Full	21.65	PC2	PASS
N41	30	80	DFT-QPSK	L	Inner_Full	21.64	PC2	PASS
N41	30	80	DFT-QPSK	L	Edge_1RB_Left	21.58	PC2	PASS

N41	30	80	DFT-QPSK	L	Edge_1RB_Right	21.22	PC2	PASS
N41	30	80	DFT-16QAM	L	Outer_Full	21.57	PC2	PASS
N41	30	80	DFT-16QAM	L	Inner_Full	21.59	PC2	PASS
N41	30	80	DFT-16QAM	L	Edge_1RB_Left	21.60	PC2	PASS
N41	30	80	DFT-16QAM	L	Edge_1RB_Right	21.21	PC2	PASS
N41	30	80	DFT-QPSK	M	Outer_Full	21.59	PC2	PASS
N41	30	80	DFT-QPSK	M	Inner_Full	21.64	PC2	PASS
N41	30	80	DFT-QPSK	M	Edge_1RB_Left	21.20	PC2	PASS
N41	30	80	DFT-QPSK	M	Edge_1RB_Right	21.43	PC2	PASS
N41	30	80	DFT-16QAM	M	Outer_Full	21.53	PC2	PASS
N41	30	80	DFT-16QAM	M	Inner_Full	21.63	PC2	PASS
N41	30	80	DFT-16QAM	M	Edge_1RB_Left	21.19	PC2	PASS
N41	30	80	DFT-16QAM	M	Edge_1RB_Right	21.43	PC2	PASS
N41	30	80	DFT-QPSK	H	Outer_Full	21.75	PC2	PASS
N41	30	80	DFT-QPSK	H	Inner_Full	21.82	PC2	PASS
N41	30	80	DFT-QPSK	H	Edge_1RB_Left	21.13	PC2	PASS
N41	30	80	DFT-QPSK	H	Edge_1RB_Right	21.60	PC2	PASS
N41	30	80	DFT-16QAM	H	Outer_Full	21.73	PC2	PASS
N41	30	80	DFT-16QAM	H	Inner_Full	21.76	PC2	PASS
N41	30	80	DFT-16QAM	H	Edge_1RB_Left	21.02	PC2	PASS
N41	30	80	DFT-16QAM	H	Edge_1RB_Right	21.47	PC2	PASS
N41	30	100	DFT-QPSK	L	Outer_Full	21.53	PC2	PASS
N41	30	100	DFT-QPSK	L	Inner_Full	21.66	PC2	PASS
N41	30	100	DFT-QPSK	L	Edge_1RB_Left	21.24	PC2	PASS
N41	30	100	DFT-QPSK	L	Edge_1RB_Right	21.07	PC2	PASS
N41	30	100	DFT-16QAM	L	Outer_Full	21.58	PC2	PASS
N41	30	100	DFT-16QAM	L	Inner_Full	21.59	PC2	PASS
N41	30	100	DFT-16QAM	L	Edge_1RB_Left	21.41	PC2	PASS
N41	30	100	DFT-16QAM	L	Edge_1RB_Right	21.36	PC2	PASS
N41	30	100	DFT-QPSK	M	Outer_Full	21.59	PC2	PASS
N41	30	100	DFT-QPSK	M	Inner_Full	21.61	PC2	PASS
N41	30	100	DFT-QPSK	M	Edge_1RB_Left	20.91	PC2	PASS
N41	30	100	DFT-QPSK	M	Edge_1RB_Right	21.09	PC2	PASS
N41	30	100	DFT-16QAM	M	Outer_Full	21.57	PC2	PASS
N41	30	100	DFT-16QAM	M	Inner_Full	21.59	PC2	PASS
N41	30	100	DFT-16QAM	M	Edge_1RB_Left	20.72	PC2	PASS
N41	30	100	DFT-16QAM	M	Edge_1RB_Right	20.86	PC2	PASS
N41	30	100	DFT-QPSK	H	Outer_Full	21.74	PC2	PASS
N41	30	100	DFT-QPSK	H	Inner_Full	22.10	PC2	PASS
N41	30	100	DFT-QPSK	H	Edge_1RB_Left	21.25	PC2	PASS
N41	30	100	DFT-QPSK	H	Edge_1RB_Right	21.45	PC2	PASS
N41	30	100	DFT-16QAM	H	Outer_Full	21.69	PC2	PASS

N41	30	100	DFT-16QAM	H	Inner_Full	21.74	PC2	PASS
N41	30	100	DFT-16QAM	H	Edge_1RB_Left	21.07	PC2	PASS
N41	30	100	DFT-16QAM	H	Edge_1RB_Right	21.39	PC2	PASS

5G NR(P3):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N66	15	5	DFT-QPSK	L	Outer_Full	20.20	PC3	PASS
N66	15	5	DFT-QPSK	L	Inner_Full	20.28	PC3	PASS
N66	15	5	DFT-QPSK	L	Edge_1RB_Left	20.56	PC3	PASS
N66	15	5	DFT-QPSK	L	Edge_1RB_Right	20.41	PC3	PASS
N66	15	5	DFT-16QAM	L	Outer_Full	20.16	PC3	PASS
N66	15	5	DFT-16QAM	L	Inner_Full	20.24	PC3	PASS
N66	15	5	DFT-16QAM	L	Edge_1RB_Left	20.08	PC3	PASS
N66	15	5	DFT-16QAM	L	Edge_1RB_Right	19.96	PC3	PASS
N66	15	5	DFT-QPSK	M	Outer_Full	20.19	PC3	PASS
N66	15	5	DFT-QPSK	M	Inner_Full	20.17	PC3	PASS
N66	15	5	DFT-QPSK	M	Edge_1RB_Left	20.41	PC3	PASS
N66	15	5	DFT-QPSK	M	Edge_1RB_Right	20.36	PC3	PASS
N66	15	5	DFT-16QAM	M	Outer_Full	20.07	PC3	PASS
N66	15	5	DFT-16QAM	M	Inner_Full	20.12	PC3	PASS
N66	15	5	DFT-16QAM	M	Edge_1RB_Left	20.36	PC3	PASS
N66	15	5	DFT-16QAM	M	Edge_1RB_Right	20.33	PC3	PASS
N66	15	5	DFT-QPSK	H	Outer_Full	19.98	PC3	PASS
N66	15	5	DFT-QPSK	H	Inner_Full	19.99	PC3	PASS
N66	15	5	DFT-QPSK	H	Edge_1RB_Left	19.95	PC3	PASS
N66	15	5	DFT-QPSK	H	Edge_1RB_Right	20.01	PC3	PASS
N66	15	5	DFT-16QAM	H	Outer_Full	20.06	PC3	PASS
N66	15	5	DFT-16QAM	H	Inner_Full	19.95	PC3	PASS
N66	15	5	DFT-16QAM	H	Edge_1RB_Left	20.21	PC3	PASS
N66	15	5	DFT-16QAM	H	Edge_1RB_Right	20.24	PC3	PASS
N66	15	10	DFT-QPSK	L	Outer_Full	20.23	PC3	PASS
N66	15	10	DFT-QPSK	L	Inner_Full	20.19	PC3	PASS
N66	15	10	DFT-QPSK	L	Edge_1RB_Left	20.45	PC3	PASS
N66	15	10	DFT-QPSK	L	Edge_1RB_Right	20.36	PC3	PASS
N66	15	10	DFT-16QAM	L	Outer_Full	20.23	PC3	PASS
N66	15	10	DFT-16QAM	L	Inner_Full	20.15	PC3	PASS
N66	15	10	DFT-16QAM	L	Edge_1RB_Left	20.33	PC3	PASS
N66	15	10	DFT-16QAM	L	Edge_1RB_Right	20.21	PC3	PASS
N66	15	10	DFT-QPSK	M	Outer_Full	20.22	PC3	PASS

N66	15	10	DFT-QPSK	M	Inner_Full	20.21	PC3	PASS
N66	15	10	DFT-QPSK	M	Edge_1RB_Left	20.20	PC3	PASS
N66	15	10	DFT-QPSK	M	Edge_1RB_Right	20.22	PC3	PASS
N66	15	10	DFT-16QAM	M	Outer_Full	20.20	PC3	PASS
N66	15	10	DFT-16QAM	M	Inner_Full	20.14	PC3	PASS
N66	15	10	DFT-16QAM	M	Edge_1RB_Left	20.03	PC3	PASS
N66	15	10	DFT-16QAM	M	Edge_1RB_Right	20.05	PC3	PASS
N66	15	10	DFT-QPSK	H	Outer_Full	19.95	PC3	PASS
N66	15	10	DFT-QPSK	H	Inner_Full	19.87	PC3	PASS
N66	15	10	DFT-QPSK	H	Edge_1RB_Left	19.60	PC3	PASS
N66	15	10	DFT-QPSK	H	Edge_1RB_Right	19.62	PC3	PASS
N66	15	10	DFT-16QAM	H	Outer_Full	19.98	PC3	PASS
N66	15	10	DFT-16QAM	H	Inner_Full	19.90	PC3	PASS
N66	15	10	DFT-16QAM	H	Edge_1RB_Left	19.87	PC3	PASS
N66	15	10	DFT-16QAM	H	Edge_1RB_Right	19.96	PC3	PASS
N66	15	15	DFT-QPSK	L	Outer_Full	20.28	PC3	PASS
N66	15	15	DFT-QPSK	L	Inner_Full	20.22	PC3	PASS
N66	15	15	DFT-QPSK	L	Edge_1RB_Left	20.26	PC3	PASS
N66	15	15	DFT-QPSK	L	Edge_1RB_Right	20.26	PC3	PASS
N66	15	15	DFT-16QAM	L	Outer_Full	20.28	PC3	PASS
N66	15	15	DFT-16QAM	L	Inner_Full	20.18	PC3	PASS
N66	15	15	DFT-16QAM	L	Edge_1RB_Left	20.07	PC3	PASS
N66	15	15	DFT-16QAM	L	Edge_1RB_Right	20.02	PC3	PASS
N66	15	15	DFT-QPSK	M	Outer_Full	20.24	PC3	PASS
N66	15	15	DFT-QPSK	M	Inner_Full	20.22	PC3	PASS
N66	15	15	DFT-QPSK	M	Edge_1RB_Left	20.21	PC3	PASS
N66	15	15	DFT-QPSK	M	Edge_1RB_Right	20.19	PC3	PASS
N66	15	15	DFT-16QAM	M	Outer_Full	20.22	PC3	PASS
N66	15	15	DFT-16QAM	M	Inner_Full	20.23	PC3	PASS
N66	15	15	DFT-16QAM	M	Edge_1RB_Left	20.15	PC3	PASS
N66	15	15	DFT-16QAM	M	Edge_1RB_Right	20.10	PC3	PASS
N66	15	15	DFT-QPSK	H	Outer_Full	19.99	PC3	PASS
N66	15	15	DFT-QPSK	H	Inner_Full	19.95	PC3	PASS
N66	15	15	DFT-QPSK	H	Edge_1RB_Left	20.24	PC3	PASS
N66	15	15	DFT-QPSK	H	Edge_1RB_Right	20.26	PC3	PASS
N66	15	15	DFT-16QAM	H	Outer_Full	19.94	PC3	PASS
N66	15	15	DFT-16QAM	H	Inner_Full	20.02	PC3	PASS
N66	15	15	DFT-16QAM	H	Edge_1RB_Left	20.34	PC3	PASS
N66	15	15	DFT-16QAM	H	Edge_1RB_Right	20.34	PC3	PASS
N66	15	20	DFT-QPSK	L	Outer_Full	20.16	PC3	PASS
N66	15	20	DFT-QPSK	L	Inner_Full	20.16	PC3	PASS
N66	15	20	DFT-QPSK	L	Edge_1RB_Left	20.39	PC3	PASS

N66	15	20	DFT-QPSK	L	Edge_1RB_Right	20.39	PC3	PASS
N66	15	20	DFT-16QAM	L	Outer_Full	20.12	PC3	PASS
N66	15	20	DFT-16QAM	L	Inner_Full	20.23	PC3	PASS
N66	15	20	DFT-16QAM	L	Edge_1RB_Left	20.35	PC3	PASS
N66	15	20	DFT-16QAM	L	Edge_1RB_Right	20.30	PC3	PASS
N66	15	20	DFT-QPSK	M	Outer_Full	20.23	PC3	PASS
N66	15	20	DFT-QPSK	M	Inner_Full	20.22	PC3	PASS
N66	15	20	DFT-QPSK	M	Edge_1RB_Left	20.32	PC3	PASS
N66	15	20	DFT-QPSK	M	Edge_1RB_Right	20.81	PC3	PASS
N66	15	20	DFT-16QAM	M	Outer_Full	20.24	PC3	PASS
N66	15	20	DFT-16QAM	M	Inner_Full	20.18	PC3	PASS
N66	15	20	DFT-16QAM	M	Edge_1RB_Left	20.27	PC3	PASS
N66	15	20	DFT-16QAM	M	Edge_1RB_Right	20.72	PC3	PASS
N66	15	20	DFT-QPSK	H	Outer_Full	19.94	PC3	PASS
N66	15	20	DFT-QPSK	H	Inner_Full	19.99	PC3	PASS
N66	15	20	DFT-QPSK	H	Edge_1RB_Left	20.11	PC3	PASS
N66	15	20	DFT-QPSK	H	Edge_1RB_Right	20.08	PC3	PASS
N66	15	20	DFT-16QAM	H	Outer_Full	19.88	PC3	PASS
N66	15	20	DFT-16QAM	H	Inner_Full	19.99	PC3	PASS
N66	15	20	DFT-16QAM	H	Edge_1RB_Left	20.00	PC3	PASS
N66	15	20	DFT-16QAM	H	Edge_1RB_Right	19.95	PC3	PASS

5G NR(P3): N77_3450-3550MHz

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N77-3450-3550	30	10	DFT-QPSK	L	Outer_Full	20.89	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Inner_Full	20.95	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Edge_1RB_Left	20.98	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Edge_1RB_Right	21.04	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	L	Outer_Full	20.87	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	L	Inner_Full	21.01	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	L	Edge_1RB_Left	21.36	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	L	Edge_1RB_Right	21.33	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Outer_Full	21.09	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Inner_Full	21.05	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Edge_1RB_Left	21.12	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Edge_1RB_Right	21.03	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	M	Outer_Full	21.17	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	M	Inner_Full	21.07	PC2	PASS

N77-3450-3550	30	10	DFT-16QAM	M	Edge_1RB_Left	21.15	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	M	Edge_1RB_Right	21.10	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Outer_Full	20.61	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Inner_Full	20.72	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Edge_1RB_Left	20.64	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Edge_1RB_Right	20.59	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	H	Outer_Full	20.60	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	H	Inner_Full	20.53	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	H	Edge_1RB_Left	20.62	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	H	Edge_1RB_Right	20.60	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Outer_Full	21.00	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Inner_Full	20.94	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Edge_1RB_Left	20.66	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Edge_1RB_Right	20.70	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	L	Outer_Full	20.97	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	L	Inner_Full	20.94	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	L	Edge_1RB_Left	20.89	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	L	Edge_1RB_Right	20.98	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Outer_Full	21.07	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Inner_Full	21.03	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Edge_1RB_Left	21.04	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Edge_1RB_Right	21.02	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	M	Outer_Full	21.01	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	M	Inner_Full	21.08	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	M	Edge_1RB_Left	20.74	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	M	Edge_1RB_Right	20.60	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Outer_Full	20.69	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Inner_Full	20.61	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Edge_1RB_Left	20.75	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Edge_1RB_Right	20.66	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	H	Outer_Full	20.70	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	H	Inner_Full	20.56	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	H	Edge_1RB_Left	20.55	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	H	Edge_1RB_Right	20.50	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Outer_Full	21.02	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Inner_Full	20.97	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Edge_1RB_Left	20.88	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Edge_1RB_Right	21.03	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	L	Outer_Full	20.96	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	L	Inner_Full	20.94	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	L	Edge_1RB_Left	21.36	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	L	Edge_1RB_Right	21.47	PC2	PASS

N77-3450-3550	30	20	DFT-QPSK	M	Outer_Full	21.05	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Inner_Full	21.08	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Edge_1RB_Left	21.12	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Edge_1RB_Right	21.03	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	M	Outer_Full	20.92	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	M	Inner_Full	21.02	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	M	Edge_1RB_Left	21.16	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	M	Edge_1RB_Right	21.01	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Outer_Full	20.60	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Inner_Full	20.67	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Edge_1RB_Left	20.69	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Edge_1RB_Right	20.58	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	H	Outer_Full	20.72	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	H	Inner_Full	20.67	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	H	Edge_1RB_Left	20.65	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	H	Edge_1RB_Right	20.58	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Outer_Full	21.00	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Inner_Full	21.06	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Edge_1RB_Left	20.87	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Edge_1RB_Right	21.01	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	L	Outer_Full	21.01	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	L	Inner_Full	21.07	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	L	Edge_1RB_Left	21.09	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	L	Edge_1RB_Right	21.16	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Outer_Full	21.03	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Inner_Full	21.06	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Edge_1RB_Left	21.27	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Edge_1RB_Right	20.99	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	M	Outer_Full	20.97	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	M	Inner_Full	21.05	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	M	Edge_1RB_Left	20.75	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	M	Edge_1RB_Right	20.51	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Outer_Full	20.69	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Inner_Full	20.82	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Edge_1RB_Left	20.77	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Edge_1RB_Right	20.55	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	H	Outer_Full	20.78	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	H	Inner_Full	20.76	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	H	Edge_1RB_Left	20.85	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	H	Edge_1RB_Right	20.58	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Outer_Full	21.08	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Inner_Full	21.13	PC2	PASS

N77-3450-3550	30	50	DFT-QPSK	L	Edge_1RB_Left	20.92	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Edge_1RB_Right	20.91	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	L	Outer_Full	21.08	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	L	Inner_Full	21.16	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	L	Edge_1RB_Left	21.22	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	L	Edge_1RB_Right	21.24	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Outer_Full	21.08	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Inner_Full	21.13	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Edge_1RB_Left	21.31	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Edge_1RB_Right	21.01	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	M	Outer_Full	21.05	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	M	Inner_Full	21.01	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	M	Edge_1RB_Left	21.26	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	M	Edge_1RB_Right	20.93	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Outer_Full	20.84	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Inner_Full	20.84	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Edge_1RB_Left	20.93	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Edge_1RB_Right	20.62	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	H	Outer_Full	20.75	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	H	Inner_Full	20.87	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	H	Edge_1RB_Left	20.92	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	H	Edge_1RB_Right	20.59	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Outer_Full	21.01	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Inner_Full	21.14	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Edge_1RB_Left	20.88	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Edge_1RB_Right	20.75	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	L	Outer_Full	21.05	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	L	Inner_Full	21.18	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	L	Edge_1RB_Left	21.00	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	L	Edge_1RB_Right	20.94	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Outer_Full	21.05	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Inner_Full	21.06	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Edge_1RB_Left	21.18	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Edge_1RB_Right	20.81	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	M	Outer_Full	21.05	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	M	Inner_Full	21.10	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	M	Edge_1RB_Left	20.91	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	M	Edge_1RB_Right	20.51	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Outer_Full	20.93	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Inner_Full	20.91	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Edge_1RB_Left	21.07	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Edge_1RB_Right	20.68	PC2	PASS

N77-3450-3550	30	60	DFT-16QAM	H	Outer_Full	20.85	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	H	Inner_Full	20.88	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	H	Edge_1RB_Left	20.97	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	H	Edge_1RB_Right	20.54	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Outer_Full	21.13	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Inner_Full	21.22	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Edge_1RB_Left	21.12	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Edge_1RB_Right	20.83	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	L	Outer_Full	21.05	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	L	Inner_Full	21.21	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	L	Edge_1RB_Left	21.42	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	L	Edge_1RB_Right	21.19	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Outer_Full	21.20	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Inner_Full	21.21	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Edge_1RB_Left	21.28	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Edge_1RB_Right	20.94	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	M	Outer_Full	21.11	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	M	Inner_Full	21.16	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	M	Edge_1RB_Left	21.19	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	M	Edge_1RB_Right	20.85	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Outer_Full	21.04	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Inner_Full	21.05	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Edge_1RB_Left	21.28	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Edge_1RB_Right	20.83	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	H	Outer_Full	21.09	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	H	Inner_Full	21.05	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	H	Edge_1RB_Left	21.29	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	H	Edge_1RB_Right	20.81	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Outer_Full	21.08	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Inner_Full	21.18	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Edge_1RB_Left	20.94	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Edge_1RB_Right	20.67	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	L	Outer_Full	21.09	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	L	Inner_Full	21.20	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	L	Edge_1RB_Left	21.12	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	L	Edge_1RB_Right	20.83	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Outer_Full	21.12	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Inner_Full	21.23	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Edge_1RB_Left	21.09	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Edge_1RB_Right	20.84	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	M	Outer_Full	21.11	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	M	Inner_Full	21.12	PC2	PASS

N77-3450-3550	30	90	DFT-16QAM	M	Edge_1RB_Left	20.84	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	M	Edge_1RB_Right	20.49	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Outer_Full	21.13	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Inner_Full	21.18	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Edge_1RB_Left	21.14	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Edge_1RB_Right	20.78	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	H	Outer_Full	21.13	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	H	Inner_Full	21.17	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	H	Edge_1RB_Left	21.01	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	H	Edge_1RB_Right	20.68	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	L	Outer_Full	21.14	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	L	Inner_Full	21.20	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	L	Edge_1RB_Left	20.98	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	L	Edge_1RB_Right	20.60	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	L	Outer_Full	21.09	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	L	Inner_Full	21.21	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	L	Edge_1RB_Left	21.26	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	L	Edge_1RB_Right	20.95	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Outer_Full	21.14	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Inner_Full	21.48	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Edge_1RB_Left	20.96	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Edge_1RB_Right	20.60	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	M	Outer_Full	21.15	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	M	Inner_Full	21.21	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	M	Edge_1RB_Left	21.21	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	M	Edge_1RB_Right	20.96	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	H	Outer_Full	21.17	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	H	Inner_Full	21.16	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	H	Edge_1RB_Left	20.97	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	H	Edge_1RB_Right	20.65	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	H	Outer_Full	21.08	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	H	Inner_Full	21.19	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	H	Edge_1RB_Left	21.29	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	H	Edge_1RB_Right	20.96	PC2	PASS

5G NR(P3): N77_3700-3980MHz

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N77-3700-3980	30	10	DFT-QPSK	L	Outer_Full	20.72	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Inner_Full	20.80	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Edge_1RB_Left	20.66	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Edge_1RB_Right	20.86	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	L	Outer_Full	20.76	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	L	Inner_Full	20.78	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	L	Edge_1RB_Left	21.04	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	L	Edge_1RB_Right	21.15	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Outer_Full	21.19	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Inner_Full	21.39	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Edge_1RB_Left	21.18	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Edge_1RB_Right	21.24	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	M	Outer_Full	21.13	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	M	Inner_Full	21.17	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	M	Edge_1RB_Left	21.24	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	M	Edge_1RB_Right	21.29	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Outer_Full	21.31	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Inner_Full	21.46	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Edge_1RB_Left	21.37	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Edge_1RB_Right	21.41	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	H	Outer_Full	21.32	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	H	Inner_Full	21.38	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	H	Edge_1RB_Left	21.38	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	H	Edge_1RB_Right	21.42	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Outer_Full	20.77	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Inner_Full	20.82	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Edge_1RB_Left	20.41	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Edge_1RB_Right	20.60	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	L	Outer_Full	20.80	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	L	Inner_Full	20.77	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	L	Edge_1RB_Left	20.66	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	L	Edge_1RB_Right	20.87	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Outer_Full	21.23	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Inner_Full	21.28	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Edge_1RB_Left	21.12	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Edge_1RB_Right	21.21	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	M	Outer_Full	21.13	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	M	Inner_Full	21.32	PC2	PASS

N77-3700-3980	30	15	DFT-16QAM	M	Edge_1RB_Left	20.84	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	M	Edge_1RB_Right	20.87	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Outer_Full	21.39	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Inner_Full	21.37	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Edge_1RB_Left	21.35	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Edge_1RB_Right	21.41	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	H	Outer_Full	21.43	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	H	Inner_Full	21.33	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	H	Edge_1RB_Left	21.10	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	H	Edge_1RB_Right	21.22	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Outer_Full	20.82	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Inner_Full	20.86	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Edge_1RB_Left	20.59	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Edge_1RB_Right	20.76	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	L	Outer_Full	20.78	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	L	Inner_Full	20.81	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	L	Edge_1RB_Left	21.01	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	L	Edge_1RB_Right	21.21	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Outer_Full	21.18	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Inner_Full	21.28	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Edge_1RB_Left	21.11	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Edge_1RB_Right	21.19	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	M	Outer_Full	21.20	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	M	Inner_Full	21.15	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	M	Edge_1RB_Left	21.21	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	M	Edge_1RB_Right	21.28	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Outer_Full	21.35	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Inner_Full	21.39	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Edge_1RB_Left	21.20	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Edge_1RB_Right	21.41	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	H	Outer_Full	21.38	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	H	Inner_Full	21.43	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	H	Edge_1RB_Left	21.21	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	H	Edge_1RB_Right	21.42	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Outer_Full	20.79	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Inner_Full	20.86	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Edge_1RB_Left	20.58	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Edge_1RB_Right	20.96	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	L	Outer_Full	20.79	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	L	Inner_Full	20.89	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	L	Edge_1RB_Left	20.74	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	L	Edge_1RB_Right	21.09	PC2	PASS

N77-3700-3980	30	40	DFT-QPSK	M	Outer_Full	21.22	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Inner_Full	21.28	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Edge_1RB_Left	21.15	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Edge_1RB_Right	21.20	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	M	Outer_Full	21.12	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	M	Inner_Full	21.25	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	M	Edge_1RB_Left	20.66	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	M	Edge_1RB_Right	20.74	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Outer_Full	21.16	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Inner_Full	21.20	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Edge_1RB_Left	20.97	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Edge_1RB_Right	21.34	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	H	Outer_Full	21.22	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	H	Inner_Full	21.24	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	H	Edge_1RB_Left	20.99	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	H	Edge_1RB_Right	21.41	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Outer_Full	21.02	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Inner_Full	21.00	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Edge_1RB_Left	20.63	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Edge_1RB_Right	21.01	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	L	Outer_Full	20.96	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	L	Inner_Full	21.00	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	L	Edge_1RB_Left	20.98	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	L	Edge_1RB_Right	21.29	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Outer_Full	21.24	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Inner_Full	21.34	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Edge_1RB_Left	21.23	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Edge_1RB_Right	21.30	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	M	Outer_Full	21.26	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	M	Inner_Full	21.26	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	M	Edge_1RB_Left	21.21	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	M	Edge_1RB_Right	21.26	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Outer_Full	21.25	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Inner_Full	21.17	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Edge_1RB_Left	21.04	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Edge_1RB_Right	21.43	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	H	Outer_Full	21.17	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	H	Inner_Full	21.09	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	H	Edge_1RB_Left	21.04	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	H	Edge_1RB_Right	21.41	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Outer_Full	20.96	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Inner_Full	20.99	PC2	PASS

N77-3700-3980	30	60	DFT-QPSK	L	Edge_1RB_Left	20.57	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Edge_1RB_Right	20.79	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	L	Outer_Full	20.92	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	L	Inner_Full	20.94	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	L	Edge_1RB_Left	20.65	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	L	Edge_1RB_Right	20.95	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Outer_Full	21.21	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Inner_Full	21.27	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Edge_1RB_Left	21.12	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Edge_1RB_Right	21.21	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	M	Outer_Full	21.22	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	M	Inner_Full	21.23	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	M	Edge_1RB_Left	20.84	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	M	Edge_1RB_Right	20.94	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Outer_Full	21.20	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Inner_Full	21.18	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Edge_1RB_Left	20.96	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Edge_1RB_Right	21.45	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	H	Outer_Full	21.17	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	H	Inner_Full	21.13	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	H	Edge_1RB_Left	20.83	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	H	Edge_1RB_Right	21.32	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Outer_Full	21.35	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Inner_Full	21.46	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Edge_1RB_Left	21.08	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Edge_1RB_Right	21.37	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	L	Outer_Full	21.30	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	L	Inner_Full	21.42	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	L	Edge_1RB_Left	21.40	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	L	Edge_1RB_Right	21.68	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Outer_Full	21.22	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Inner_Full	21.29	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Edge_1RB_Left	21.13	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Edge_1RB_Right	21.38	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	M	Outer_Full	21.25	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	M	Inner_Full	21.24	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	M	Edge_1RB_Left	21.12	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	M	Edge_1RB_Right	21.36	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Outer_Full	21.32	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Inner_Full	21.32	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Edge_1RB_Left	21.26	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Edge_1RB_Right	21.59	PC2	PASS

N77-3700-3980	30	80	DFT-16QAM	H	Outer_Full	21.32	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	H	Inner_Full	21.24	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	H	Edge_1RB_Left	21.24	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	H	Edge_1RB_Right	21.57	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Outer_Full	21.37	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Inner_Full	21.49	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Edge_1RB_Left	21.03	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Edge_1RB_Right	21.12	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	L	Outer_Full	21.45	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	L	Inner_Full	21.46	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	L	Edge_1RB_Left	21.15	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	L	Edge_1RB_Right	21.31	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Outer_Full	21.29	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Inner_Full	21.35	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Edge_1RB_Left	20.89	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Edge_1RB_Right	21.24	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	M	Outer_Full	21.27	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	M	Inner_Full	21.31	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	M	Edge_1RB_Left	20.61	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	M	Edge_1RB_Right	20.91	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Outer_Full	21.28	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Inner_Full	21.31	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Edge_1RB_Left	21.15	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Edge_1RB_Right	21.58	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	H	Outer_Full	21.35	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	H	Inner_Full	21.32	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	H	Edge_1RB_Left	21.05	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	H	Edge_1RB_Right	21.51	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Outer_Full	21.37	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Inner_Full	21.69	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Edge_1RB_Left	20.93	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Edge_1RB_Right	21.11	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	L	Outer_Full	21.43	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	L	Inner_Full	21.43	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	L	Edge_1RB_Left	21.23	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	L	Edge_1RB_Right	21.43	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Outer_Full	21.25	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Inner_Full	21.28	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Edge_1RB_Left	20.85	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Edge_1RB_Right	21.11	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	M	Outer_Full	21.22	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	M	Inner_Full	21.21	PC2	PASS

N77-3700-3980	30	100	DFT-16QAM	M	Edge_1RB_Left	20.80	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	M	Edge_1RB_Right	21.09	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Outer_Full	21.30	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Inner_Full	21.31	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Edge_1RB_Left	20.98	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Edge_1RB_Right	21.45	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	H	Outer_Full	21.29	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	H	Inner_Full	21.25	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	H	Edge_1RB_Left	20.96	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	H	Edge_1RB_Right	21.40	PC2	PASS

5G NR(P4): Sensor ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N2	15	5	DFT-QPSK	L	Outer_Full	20.82	PC3	PASS
N2	15	5	DFT-QPSK	L	Inner_Full	20.88	PC3	PASS
N2	15	5	DFT-QPSK	L	Edge_1RB_Left	21.11	PC3	PASS
N2	15	5	DFT-QPSK	L	Edge_1RB_Right	21.10	PC3	PASS
N2	15	5	DFT-16QAM	L	Outer_Full	20.75	PC3	PASS
N2	15	5	DFT-16QAM	L	Inner_Full	20.86	PC3	PASS
N2	15	5	DFT-16QAM	L	Edge_1RB_Left	20.58	PC3	PASS
N2	15	5	DFT-16QAM	L	Edge_1RB_Right	20.57	PC3	PASS
N2	15	5	DFT-QPSK	M	Outer_Full	20.89	PC3	PASS
N2	15	5	DFT-QPSK	M	Inner_Full	20.87	PC3	PASS
N2	15	5	DFT-QPSK	M	Edge_1RB_Left	21.03	PC3	PASS
N2	15	5	DFT-QPSK	M	Edge_1RB_Right	21.04	PC3	PASS
N2	15	5	DFT-16QAM	M	Outer_Full	20.77	PC3	PASS
N2	15	5	DFT-16QAM	M	Inner_Full	20.85	PC3	PASS
N2	15	5	DFT-16QAM	M	Edge_1RB_Left	21.00	PC3	PASS
N2	15	5	DFT-16QAM	M	Edge_1RB_Right	20.99	PC3	PASS
N2	15	5	DFT-QPSK	H	Outer_Full	20.78	PC3	PASS
N2	15	5	DFT-QPSK	H	Inner_Full	20.80	PC3	PASS
N2	15	5	DFT-QPSK	H	Edge_1RB_Left	20.73	PC3	PASS
N2	15	5	DFT-QPSK	H	Edge_1RB_Right	20.76	PC3	PASS
N2	15	5	DFT-16QAM	H	Outer_Full	20.84	PC3	PASS
N2	15	5	DFT-16QAM	H	Inner_Full	20.74	PC3	PASS
N2	15	5	DFT-16QAM	H	Edge_1RB_Left	20.99	PC3	PASS
N2	15	5	DFT-16QAM	H	Edge_1RB_Right	21.04	PC3	PASS
N2	15	10	DFT-QPSK	L	Outer_Full	20.81	PC3	PASS
N2	15	10	DFT-QPSK	L	Inner_Full	20.85	PC3	PASS

N2	15	10	DFT-QPSK	L	Edge_1RB_Left	21.09	PC3	PASS
N2	15	10	DFT-QPSK	L	Edge_1RB_Right	21.04	PC3	PASS
N2	15	10	DFT-16QAM	L	Outer_Full	20.78	PC3	PASS
N2	15	10	DFT-16QAM	L	Inner_Full	20.82	PC3	PASS
N2	15	10	DFT-16QAM	L	Edge_1RB_Left	20.90	PC3	PASS
N2	15	10	DFT-16QAM	L	Edge_1RB_Right	20.89	PC3	PASS
N2	15	10	DFT-QPSK	M	Outer_Full	20.87	PC3	PASS
N2	15	10	DFT-QPSK	M	Inner_Full	20.89	PC3	PASS
N2	15	10	DFT-QPSK	M	Edge_1RB_Left	20.79	PC3	PASS
N2	15	10	DFT-QPSK	M	Edge_1RB_Right	20.79	PC3	PASS
N2	15	10	DFT-16QAM	M	Outer_Full	20.85	PC3	PASS
N2	15	10	DFT-16QAM	M	Inner_Full	20.81	PC3	PASS
N2	15	10	DFT-16QAM	M	Edge_1RB_Left	20.69	PC3	PASS
N2	15	10	DFT-16QAM	M	Edge_1RB_Right	20.56	PC3	PASS
N2	15	10	DFT-QPSK	H	Outer_Full	20.75	PC3	PASS
N2	15	10	DFT-QPSK	H	Inner_Full	20.74	PC3	PASS
N2	15	10	DFT-QPSK	H	Edge_1RB_Left	20.34	PC3	PASS
N2	15	10	DFT-QPSK	H	Edge_1RB_Right	20.43	PC3	PASS
N2	15	10	DFT-16QAM	H	Outer_Full	20.81	PC3	PASS
N2	15	10	DFT-16QAM	H	Inner_Full	20.70	PC3	PASS
N2	15	10	DFT-16QAM	H	Edge_1RB_Left	20.63	PC3	PASS
N2	15	10	DFT-16QAM	H	Edge_1RB_Right	20.74	PC3	PASS
N2	15	15	DFT-QPSK	L	Outer_Full	20.85	PC3	PASS
N2	15	15	DFT-QPSK	L	Inner_Full	20.85	PC3	PASS
N2	15	15	DFT-QPSK	L	Edge_1RB_Left	20.80	PC3	PASS
N2	15	15	DFT-QPSK	L	Edge_1RB_Right	20.72	PC3	PASS
N2	15	15	DFT-16QAM	L	Outer_Full	20.85	PC3	PASS
N2	15	15	DFT-16QAM	L	Inner_Full	20.74	PC3	PASS
N2	15	15	DFT-16QAM	L	Edge_1RB_Left	20.53	PC3	PASS
N2	15	15	DFT-16QAM	L	Edge_1RB_Right	20.44	PC3	PASS
N2	15	15	DFT-QPSK	M	Outer_Full	20.91	PC3	PASS
N2	15	15	DFT-QPSK	M	Inner_Full	20.91	PC3	PASS
N2	15	15	DFT-QPSK	M	Edge_1RB_Left	20.91	PC3	PASS
N2	15	15	DFT-QPSK	M	Edge_1RB_Right	20.78	PC3	PASS
N2	15	15	DFT-16QAM	M	Outer_Full	20.89	PC3	PASS
N2	15	15	DFT-16QAM	M	Inner_Full	20.92	PC3	PASS
N2	15	15	DFT-16QAM	M	Edge_1RB_Left	20.85	PC3	PASS
N2	15	15	DFT-16QAM	M	Edge_1RB_Right	20.66	PC3	PASS
N2	15	15	DFT-QPSK	H	Outer_Full	20.82	PC3	PASS
N2	15	15	DFT-QPSK	H	Inner_Full	20.78	PC3	PASS
N2	15	15	DFT-QPSK	H	Edge_1RB_Left	21.02	PC3	PASS
N2	15	15	DFT-QPSK	H	Edge_1RB_Right	21.07	PC3	PASS

N2	15	15	DFT-16QAM	H	Outer_Full	20.79	PC3	PASS
N2	15	15	DFT-16QAM	H	Inner_Full	20.84	PC3	PASS
N2	15	15	DFT-16QAM	H	Edge_1RB_Left	21.07	PC3	PASS
N2	15	15	DFT-16QAM	H	Edge_1RB_Right	21.09	PC3	PASS
N2	15	20	DFT-QPSK	L	Outer_Full	20.90	PC3	PASS
N2	15	20	DFT-QPSK	L	Inner_Full	20.89	PC3	PASS
N2	15	20	DFT-QPSK	L	Edge_1RB_Left	21.12	PC3	PASS
N2	15	20	DFT-QPSK	L	Edge_1RB_Right	21.08	PC3	PASS
N2	15	20	DFT-16QAM	L	Outer_Full	20.87	PC3	PASS
N2	15	20	DFT-16QAM	L	Inner_Full	20.97	PC3	PASS
N2	15	20	DFT-16QAM	L	Edge_1RB_Left	20.98	PC3	PASS
N2	15	20	DFT-16QAM	L	Edge_1RB_Right	21.03	PC3	PASS
N2	15	20	DFT-QPSK	M	Outer_Full	20.89	PC3	PASS
N2	15	20	DFT-QPSK	M	Inner_Full	20.94	PC3	PASS
N2	15	20	DFT-QPSK	M	Edge_1RB_Left	21.00	PC3	PASS
N2	15	20	DFT-QPSK	M	Edge_1RB_Right	20.88	PC3	PASS
N2	15	20	DFT-16QAM	M	Outer_Full	20.93	PC3	PASS
N2	15	20	DFT-16QAM	M	Inner_Full	20.87	PC3	PASS
N2	15	20	DFT-16QAM	M	Edge_1RB_Left	21.44	PC3	PASS
N2	15	20	DFT-16QAM	M	Edge_1RB_Right	21.38	PC3	PASS
N2	15	20	DFT-QPSK	H	Outer_Full	20.80	PC3	PASS
N2	15	20	DFT-QPSK	H	Inner_Full	20.83	PC3	PASS
N2	15	20	DFT-QPSK	H	Edge_1RB_Left	20.83	PC3	PASS
N2	15	20	DFT-QPSK	H	Edge_1RB_Right	20.91	PC3	PASS
N2	15	20	DFT-16QAM	H	Outer_Full	20.79	PC3	PASS
N2	15	20	DFT-16QAM	H	Inner_Full	20.85	PC3	PASS
N2	15	20	DFT-16QAM	H	Edge_1RB_Left	20.81	PC3	PASS
N2	15	20	DFT-16QAM	H	Edge_1RB_Right	20.83	PC3	PASS

5G NR(P4): Sensor ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N25	15	5	DFT-QPSK	L	Outer_Full	20.83	PC3	PASS
N25	15	5	DFT-QPSK	L	Inner_Full	21.89	PC3	PASS
N25	15	5	DFT-QPSK	L	Edge_1RB_Left	21.10	PC3	PASS
N25	15	5	DFT-QPSK	L	Edge_1RB_Right	21.06	PC3	PASS
N25	15	5	DFT-16QAM	L	Outer_Full	19.76	PC3	PASS
N25	15	5	DFT-16QAM	L	Inner_Full	20.87	PC3	PASS
N25	15	5	DFT-16QAM	L	Edge_1RB_Left	19.55	PC3	PASS
N25	15	5	DFT-16QAM	L	Edge_1RB_Right	19.55	PC3	PASS

N25	15	5	DFT-QPSK	M	Outer_Full	20.80	PC3	PASS
N25	15	5	DFT-QPSK	M	Inner_Full	21.80	PC3	PASS
N25	15	5	DFT-QPSK	M	Edge_1RB_Left	21.02	PC3	PASS
N25	15	5	DFT-QPSK	M	Edge_1RB_Right	20.95	PC3	PASS
N25	15	5	DFT-16QAM	M	Outer_Full	19.72	PC3	PASS
N25	15	5	DFT-16QAM	M	Inner_Full	20.78	PC3	PASS
N25	15	5	DFT-16QAM	M	Edge_1RB_Left	19.90	PC3	PASS
N25	15	5	DFT-16QAM	M	Edge_1RB_Right	19.88	PC3	PASS
N25	15	5	DFT-QPSK	H	Outer_Full	20.84	PC3	PASS
N25	15	5	DFT-QPSK	H	Inner_Full	21.87	PC3	PASS
N25	15	5	DFT-QPSK	H	Edge_1RB_Left	20.71	PC3	PASS
N25	15	5	DFT-QPSK	H	Edge_1RB_Right	20.72	PC3	PASS
N25	15	5	DFT-16QAM	H	Outer_Full	19.86	PC3	PASS
N25	15	5	DFT-16QAM	H	Inner_Full	20.77	PC3	PASS
N25	15	5	DFT-16QAM	H	Edge_1RB_Left	20.07	PC3	PASS
N25	15	5	DFT-16QAM	H	Edge_1RB_Right	20.05	PC3	PASS
N25	15	10	DFT-QPSK	L	Outer_Full	20.79	PC3	PASS
N25	15	10	DFT-QPSK	L	Inner_Full	21.79	PC3	PASS
N25	15	10	DFT-QPSK	L	Edge_1RB_Left	21.05	PC3	PASS
N25	15	10	DFT-QPSK	L	Edge_1RB_Right	20.97	PC3	PASS
N25	15	10	DFT-16QAM	L	Outer_Full	19.74	PC3	PASS
N25	15	10	DFT-16QAM	L	Inner_Full	20.80	PC3	PASS
N25	15	10	DFT-16QAM	L	Edge_1RB_Left	19.91	PC3	PASS
N25	15	10	DFT-16QAM	L	Edge_1RB_Right	19.81	PC3	PASS
N25	15	10	DFT-QPSK	M	Outer_Full	20.85	PC3	PASS
N25	15	10	DFT-QPSK	M	Inner_Full	21.83	PC3	PASS
N25	15	10	DFT-QPSK	M	Edge_1RB_Left	20.79	PC3	PASS
N25	15	10	DFT-QPSK	M	Edge_1RB_Right	20.73	PC3	PASS
N25	15	10	DFT-16QAM	M	Outer_Full	19.88	PC3	PASS
N25	15	10	DFT-16QAM	M	Inner_Full	20.75	PC3	PASS
N25	15	10	DFT-16QAM	M	Edge_1RB_Left	19.63	PC3	PASS
N25	15	10	DFT-16QAM	M	Edge_1RB_Right	19.51	PC3	PASS
N25	15	10	DFT-QPSK	H	Outer_Full	20.83	PC3	PASS
N25	15	10	DFT-QPSK	H	Inner_Full	21.83	PC3	PASS
N25	15	10	DFT-QPSK	H	Edge_1RB_Left	20.45	PC3	PASS
N25	15	10	DFT-QPSK	H	Edge_1RB_Right	20.48	PC3	PASS
N25	15	10	DFT-16QAM	H	Outer_Full	19.81	PC3	PASS
N25	15	10	DFT-16QAM	H	Inner_Full	20.73	PC3	PASS
N25	15	10	DFT-16QAM	H	Edge_1RB_Left	19.64	PC3	PASS
N25	15	10	DFT-16QAM	H	Edge_1RB_Right	19.71	PC3	PASS
N25	15	15	DFT-QPSK	L	Outer_Full	20.83	PC3	PASS
N25	15	15	DFT-QPSK	L	Inner_Full	21.79	PC3	PASS

N25	15	15	DFT-QPSK	L	Edge_1RB_Left	20.70	PC3	PASS
N25	15	15	DFT-QPSK	L	Edge_1RB_Right	20.65	PC3	PASS
N25	15	15	DFT-16QAM	L	Outer_Full	19.83	PC3	PASS
N25	15	15	DFT-16QAM	L	Inner_Full	20.71	PC3	PASS
N25	15	15	DFT-16QAM	L	Edge_1RB_Left	19.51	PC3	PASS
N25	15	15	DFT-16QAM	L	Edge_1RB_Right	19.41	PC3	PASS
N25	15	15	DFT-QPSK	M	Outer_Full	20.83	PC3	PASS
N25	15	15	DFT-QPSK	M	Inner_Full	21.83	PC3	PASS
N25	15	15	DFT-QPSK	M	Edge_1RB_Left	20.86	PC3	PASS
N25	15	15	DFT-QPSK	M	Edge_1RB_Right	20.75	PC3	PASS
N25	15	15	DFT-16QAM	M	Outer_Full	19.82	PC3	PASS
N25	15	15	DFT-16QAM	M	Inner_Full	20.81	PC3	PASS
N25	15	15	DFT-16QAM	M	Edge_1RB_Left	19.78	PC3	PASS
N25	15	15	DFT-16QAM	M	Edge_1RB_Right	19.66	PC3	PASS
N25	15	15	DFT-QPSK	H	Outer_Full	20.80	PC3	PASS
N25	15	15	DFT-QPSK	H	Inner_Full	21.79	PC3	PASS
N25	15	15	DFT-QPSK	H	Edge_1RB_Left	20.93	PC3	PASS
N25	15	15	DFT-QPSK	H	Edge_1RB_Right	21.02	PC3	PASS
N25	15	15	DFT-16QAM	H	Outer_Full	19.75	PC3	PASS
N25	15	15	DFT-16QAM	H	Inner_Full	20.86	PC3	PASS
N25	15	15	DFT-16QAM	H	Edge_1RB_Left	19.97	PC3	PASS
N25	15	15	DFT-16QAM	H	Edge_1RB_Right	20.03	PC3	PASS
N25	15	20	DFT-QPSK	L	Outer_Full	20.83	PC3	PASS
N25	15	20	DFT-QPSK	L	Inner_Full	21.84	PC3	PASS
N25	15	20	DFT-QPSK	L	Edge_1RB_Left	21.02	PC3	PASS
N25	15	20	DFT-QPSK	L	Edge_1RB_Right	20.99	PC3	PASS
N25	15	20	DFT-16QAM	L	Outer_Full	19.83	PC3	PASS
N25	15	20	DFT-16QAM	L	Inner_Full	20.91	PC3	PASS
N25	15	20	DFT-16QAM	L	Edge_1RB_Left	19.94	PC3	PASS
N25	15	20	DFT-16QAM	L	Edge_1RB_Right	19.94	PC3	PASS
N25	15	20	DFT-QPSK	M	Outer_Full	20.84	PC3	PASS
N25	15	20	DFT-QPSK	M	Inner_Full	21.90	PC3	PASS
N25	15	20	DFT-QPSK	M	Edge_1RB_Left	20.91	PC3	PASS
N25	15	20	DFT-QPSK	M	Edge_1RB_Right	20.87	PC3	PASS
N25	15	20	DFT-16QAM	M	Outer_Full	19.85	PC3	PASS
N25	15	20	DFT-16QAM	M	Inner_Full	20.84	PC3	PASS
N25	15	20	DFT-16QAM	M	Edge_1RB_Left	20.39	PC3	PASS
N25	15	20	DFT-16QAM	M	Edge_1RB_Right	20.28	PC3	PASS
N25	15	20	DFT-QPSK	H	Outer_Full	20.79	PC3	PASS
N25	15	20	DFT-QPSK	H	Inner_Full	21.80	PC3	PASS
N25	15	20	DFT-QPSK	H	Edge_1RB_Left	20.72	PC3	PASS
N25	15	20	DFT-QPSK	H	Edge_1RB_Right	20.83	PC3	PASS

N25	15	20	DFT-16QAM	H	Outer_Full	19.73	PC3	PASS
N25	15	20	DFT-16QAM	H	Inner_Full	20.81	PC3	PASS
N25	15	20	DFT-16QAM	H	Edge_1RB_Left	19.64	PC3	PASS
N25	15	20	DFT-16QAM	H	Edge_1RB_Right	19.84	PC3	PASS

5G NR(P4): Sensor ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N41	30	10	DFT-QPSK	L	Outer_Full	21.53	PC2	PASS
N41	30	10	DFT-QPSK	L	Inner_Full	22.59	PC2	PASS
N41	30	10	DFT-QPSK	L	Edge_1RB_Left	19.22	PC2	PASS
N41	30	10	DFT-QPSK	L	Edge_1RB_Right	19.15	PC2	PASS
N41	30	10	DFT-16QAM	L	Outer_Full	20.35	PC2	PASS
N41	30	10	DFT-16QAM	L	Inner_Full	21.52	PC2	PASS
N41	30	10	DFT-16QAM	L	Edge_1RB_Left	19.23	PC2	PASS
N41	30	10	DFT-16QAM	L	Edge_1RB_Right	19.15	PC2	PASS
N41	30	10	DFT-QPSK	M	Outer_Full	21.41	PC2	PASS
N41	30	10	DFT-QPSK	M	Inner_Full	22.40	PC2	PASS
N41	30	10	DFT-QPSK	M	Edge_1RB_Left	18.88	PC2	PASS
N41	30	10	DFT-QPSK	M	Edge_1RB_Right	18.97	PC2	PASS
N41	30	10	DFT-16QAM	M	Outer_Full	20.33	PC2	PASS
N41	30	10	DFT-16QAM	M	Inner_Full	21.41	PC2	PASS
N41	30	10	DFT-16QAM	M	Edge_1RB_Left	19.21	PC2	PASS
N41	30	10	DFT-16QAM	M	Edge_1RB_Right	19.33	PC2	PASS
N41	30	10	DFT-QPSK	H	Outer_Full	21.74	PC2	PASS
N41	30	10	DFT-QPSK	H	Inner_Full	22.54	PC2	PASS
N41	30	10	DFT-QPSK	H	Edge_1RB_Left	19.05	PC2	PASS
N41	30	10	DFT-QPSK	H	Edge_1RB_Right	19.35	PC2	PASS
N41	30	10	DFT-16QAM	H	Outer_Full	20.59	PC2	PASS
N41	30	10	DFT-16QAM	H	Inner_Full	21.58	PC2	PASS
N41	30	10	DFT-16QAM	H	Edge_1RB_Left	19.17	PC2	PASS
N41	30	10	DFT-16QAM	H	Edge_1RB_Right	19.38	PC2	PASS
N41	30	15	DFT-QPSK	L	Outer_Full	21.55	PC2	PASS
N41	30	15	DFT-QPSK	L	Inner_Full	22.54	PC2	PASS
N41	30	15	DFT-QPSK	L	Edge_1RB_Left	18.86	PC2	PASS
N41	30	15	DFT-QPSK	L	Edge_1RB_Right	18.76	PC2	PASS
N41	30	15	DFT-16QAM	L	Outer_Full	20.53	PC2	PASS
N41	30	15	DFT-16QAM	L	Inner_Full	21.42	PC2	PASS
N41	30	15	DFT-16QAM	L	Edge_1RB_Left	19.02	PC2	PASS
N41	30	15	DFT-16QAM	L	Edge_1RB_Right	18.95	PC2	PASS

N41	30	15	DFT-QPSK	M	Outer_Full	21.40	PC2	PASS
N41	30	15	DFT-QPSK	M	Inner_Full	22.37	PC2	PASS
N41	30	15	DFT-QPSK	M	Edge_1RB_Left	18.67	PC2	PASS
N41	30	15	DFT-QPSK	M	Edge_1RB_Right	18.83	PC2	PASS
N41	30	15	DFT-16QAM	M	Outer_Full	20.43	PC2	PASS
N41	30	15	DFT-16QAM	M	Inner_Full	21.49	PC2	PASS
N41	30	15	DFT-16QAM	M	Edge_1RB_Left	18.55	PC2	PASS
N41	30	15	DFT-16QAM	M	Edge_1RB_Right	18.68	PC2	PASS
N41	30	15	DFT-QPSK	H	Outer_Full	21.67	PC2	PASS
N41	30	15	DFT-QPSK	H	Inner_Full	22.68	PC2	PASS
N41	30	15	DFT-QPSK	H	Edge_1RB_Left	18.72	PC2	PASS
N41	30	15	DFT-QPSK	H	Edge_1RB_Right	19.04	PC2	PASS
N41	30	15	DFT-16QAM	H	Outer_Full	20.66	PC2	PASS
N41	30	15	DFT-16QAM	H	Inner_Full	21.61	PC2	PASS
N41	30	15	DFT-16QAM	H	Edge_1RB_Left	18.99	PC2	PASS
N41	30	15	DFT-16QAM	H	Edge_1RB_Right	19.27	PC2	PASS
N41	30	20	DFT-QPSK	L	Outer_Full	21.40	PC2	PASS
N41	30	20	DFT-QPSK	L	Inner_Full	22.55	PC2	PASS
N41	30	20	DFT-QPSK	L	Edge_1RB_Left	19.00	PC2	PASS
N41	30	20	DFT-QPSK	L	Edge_1RB_Right	18.84	PC2	PASS
N41	30	20	DFT-16QAM	L	Outer_Full	20.47	PC2	PASS
N41	30	20	DFT-16QAM	L	Inner_Full	21.49	PC2	PASS
N41	30	20	DFT-16QAM	L	Edge_1RB_Left	18.76	PC2	PASS
N41	30	20	DFT-16QAM	L	Edge_1RB_Right	18.61	PC2	PASS
N41	30	20	DFT-QPSK	M	Outer_Full	21.35	PC2	PASS
N41	30	20	DFT-QPSK	M	Inner_Full	22.43	PC2	PASS
N41	30	20	DFT-QPSK	M	Edge_1RB_Left	18.70	PC2	PASS
N41	30	20	DFT-QPSK	M	Edge_1RB_Right	18.86	PC2	PASS
N41	30	20	DFT-16QAM	M	Outer_Full	20.36	PC2	PASS
N41	30	20	DFT-16QAM	M	Inner_Full	21.29	PC2	PASS
N41	30	20	DFT-16QAM	M	Edge_1RB_Left	18.54	PC2	PASS
N41	30	20	DFT-16QAM	M	Edge_1RB_Right	18.70	PC2	PASS
N41	30	20	DFT-QPSK	H	Outer_Full	21.55	PC2	PASS
N41	30	20	DFT-QPSK	H	Inner_Full	22.68	PC2	PASS
N41	30	20	DFT-QPSK	H	Edge_1RB_Left	19.08	PC2	PASS
N41	30	20	DFT-QPSK	H	Edge_1RB_Right	19.28	PC2	PASS
N41	30	20	DFT-16QAM	H	Outer_Full	20.55	PC2	PASS
N41	30	20	DFT-16QAM	H	Inner_Full	21.46	PC2	PASS
N41	30	20	DFT-16QAM	H	Edge_1RB_Left	19.03	PC2	PASS
N41	30	20	DFT-16QAM	H	Edge_1RB_Right	19.20	PC2	PASS
N41	30	30	DFT-QPSK	L	Outer_Full	21.49	PC2	PASS
N41	30	30	DFT-QPSK	L	Inner_Full	22.39	PC2	PASS

N41	30	30	DFT-QPSK	L	Edge_1RB_Left	19.03	PC2	PASS
N41	30	30	DFT-QPSK	L	Edge_1RB_Right	18.97	PC2	PASS
N41	30	30	DFT-16QAM	L	Outer_Full	20.43	PC2	PASS
N41	30	30	DFT-16QAM	L	Inner_Full	21.44	PC2	PASS
N41	30	30	DFT-16QAM	L	Edge_1RB_Left	19.34	PC2	PASS
N41	30	30	DFT-16QAM	L	Edge_1RB_Right	19.24	PC2	PASS
N41	30	30	DFT-QPSK	M	Outer_Full	21.39	PC2	PASS
N41	30	30	DFT-QPSK	M	Inner_Full	22.39	PC2	PASS
N41	30	30	DFT-QPSK	M	Edge_1RB_Left	18.80	PC2	PASS
N41	30	30	DFT-QPSK	M	Edge_1RB_Right	18.87	PC2	PASS
N41	30	30	DFT-16QAM	M	Outer_Full	20.36	PC2	PASS
N41	30	30	DFT-16QAM	M	Inner_Full	21.39	PC2	PASS
N41	30	30	DFT-16QAM	M	Edge_1RB_Left	18.74	PC2	PASS
N41	30	30	DFT-16QAM	M	Edge_1RB_Right	18.84	PC2	PASS
N41	30	30	DFT-QPSK	H	Outer_Full	21.64	PC2	PASS
N41	30	30	DFT-QPSK	H	Inner_Full	22.61	PC2	PASS
N41	30	30	DFT-QPSK	H	Edge_1RB_Left	19.16	PC2	PASS
N41	30	30	DFT-QPSK	H	Edge_1RB_Right	19.23	PC2	PASS
N41	30	30	DFT-16QAM	H	Outer_Full	20.57	PC2	PASS
N41	30	30	DFT-16QAM	H	Inner_Full	21.64	PC2	PASS
N41	30	30	DFT-16QAM	H	Edge_1RB_Left	19.12	PC2	PASS
N41	30	30	DFT-16QAM	H	Edge_1RB_Right	19.17	PC2	PASS
N41	30	40	DFT-QPSK	L	Outer_Full	21.46	PC2	PASS
N41	30	40	DFT-QPSK	L	Inner_Full	22.49	PC2	PASS
N41	30	40	DFT-QPSK	L	Edge_1RB_Left	18.94	PC2	PASS
N41	30	40	DFT-QPSK	L	Edge_1RB_Right	18.82	PC2	PASS
N41	30	40	DFT-16QAM	L	Outer_Full	20.43	PC2	PASS
N41	30	40	DFT-16QAM	L	Inner_Full	21.44	PC2	PASS
N41	30	40	DFT-16QAM	L	Edge_1RB_Left	18.91	PC2	PASS
N41	30	40	DFT-16QAM	L	Edge_1RB_Right	18.74	PC2	PASS
N41	30	40	DFT-QPSK	M	Outer_Full	21.33	PC2	PASS
N41	30	40	DFT-QPSK	M	Inner_Full	22.39	PC2	PASS
N41	30	40	DFT-QPSK	M	Edge_1RB_Left	18.57	PC2	PASS
N41	30	40	DFT-QPSK	M	Edge_1RB_Right	18.66	PC2	PASS
N41	30	40	DFT-16QAM	M	Outer_Full	20.27	PC2	PASS
N41	30	40	DFT-16QAM	M	Inner_Full	21.39	PC2	PASS
N41	30	40	DFT-16QAM	M	Edge_1RB_Left	18.86	PC2	PASS
N41	30	40	DFT-16QAM	M	Edge_1RB_Right	18.89	PC2	PASS
N41	30	40	DFT-QPSK	H	Outer_Full	21.55	PC2	PASS
N41	30	40	DFT-QPSK	H	Inner_Full	22.59	PC2	PASS
N41	30	40	DFT-QPSK	H	Edge_1RB_Left	18.85	PC2	PASS
N41	30	40	DFT-QPSK	H	Edge_1RB_Right	19.27	PC2	PASS

N41	30	40	DFT-16QAM	H	Outer_Full	20.51	PC2	PASS
N41	30	40	DFT-16QAM	H	Inner_Full	21.64	PC2	PASS
N41	30	40	DFT-16QAM	H	Edge_1RB_Left	18.37	PC2	PASS
N41	30	40	DFT-16QAM	H	Edge_1RB_Right	18.76	PC2	PASS
N41	30	60	DFT-QPSK	L	Outer_Full	21.34	PC2	PASS
N41	30	60	DFT-QPSK	L	Inner_Full	22.40	PC2	PASS
N41	30	60	DFT-QPSK	L	Edge_1RB_Left	18.89	PC2	PASS
N41	30	60	DFT-QPSK	L	Edge_1RB_Right	18.68	PC2	PASS
N41	30	60	DFT-16QAM	L	Outer_Full	20.33	PC2	PASS
N41	30	60	DFT-16QAM	L	Inner_Full	21.40	PC2	PASS
N41	30	60	DFT-16QAM	L	Edge_1RB_Left	18.82	PC2	PASS
N41	30	60	DFT-16QAM	L	Edge_1RB_Right	18.58	PC2	PASS
N41	30	60	DFT-QPSK	M	Outer_Full	21.26	PC2	PASS
N41	30	60	DFT-QPSK	M	Inner_Full	22.34	PC2	PASS
N41	30	60	DFT-QPSK	M	Edge_1RB_Left	18.71	PC2	PASS
N41	30	60	DFT-QPSK	M	Edge_1RB_Right	18.77	PC2	PASS
N41	30	60	DFT-16QAM	M	Outer_Full	20.22	PC2	PASS
N41	30	60	DFT-16QAM	M	Inner_Full	21.30	PC2	PASS
N41	30	60	DFT-16QAM	M	Edge_1RB_Left	18.67	PC2	PASS
N41	30	60	DFT-16QAM	M	Edge_1RB_Right	18.73	PC2	PASS
N41	30	60	DFT-QPSK	H	Outer_Full	21.50	PC2	PASS
N41	30	60	DFT-QPSK	H	Inner_Full	22.58	PC2	PASS
N41	30	60	DFT-QPSK	H	Edge_1RB_Left	18.86	PC2	PASS
N41	30	60	DFT-QPSK	H	Edge_1RB_Right	19.12	PC2	PASS
N41	30	60	DFT-16QAM	H	Outer_Full	20.44	PC2	PASS
N41	30	60	DFT-16QAM	H	Inner_Full	21.56	PC2	PASS
N41	30	60	DFT-16QAM	H	Edge_1RB_Left	19.23	PC2	PASS
N41	30	60	DFT-16QAM	H	Edge_1RB_Right	19.50	PC2	PASS
N41	30	80	DFT-QPSK	L	Outer_Full	21.37	PC2	PASS
N41	30	80	DFT-QPSK	L	Inner_Full	22.33	PC2	PASS
N41	30	80	DFT-QPSK	L	Edge_1RB_Left	19.09	PC2	PASS
N41	30	80	DFT-QPSK	L	Edge_1RB_Right	18.74	PC2	PASS
N41	30	80	DFT-16QAM	L	Outer_Full	20.31	PC2	PASS
N41	30	80	DFT-16QAM	L	Inner_Full	21.31	PC2	PASS
N41	30	80	DFT-16QAM	L	Edge_1RB_Left	19.11	PC2	PASS
N41	30	80	DFT-16QAM	L	Edge_1RB_Right	18.69	PC2	PASS
N41	30	80	DFT-QPSK	M	Outer_Full	21.26	PC2	PASS
N41	30	80	DFT-QPSK	M	Inner_Full	22.35	PC2	PASS
N41	30	80	DFT-QPSK	M	Edge_1RB_Left	18.65	PC2	PASS
N41	30	80	DFT-QPSK	M	Edge_1RB_Right	18.91	PC2	PASS
N41	30	80	DFT-16QAM	M	Outer_Full	20.26	PC2	PASS
N41	30	80	DFT-16QAM	M	Inner_Full	21.36	PC2	PASS

N41	30	80	DFT-16QAM	M	Edge_1RB_Left	18.64	PC2	PASS
N41	30	80	DFT-16QAM	M	Edge_1RB_Right	18.87	PC2	PASS
N41	30	80	DFT-QPSK	H	Outer_Full	21.41	PC2	PASS
N41	30	80	DFT-QPSK	H	Inner_Full	22.57	PC2	PASS
N41	30	80	DFT-QPSK	H	Edge_1RB_Left	18.64	PC2	PASS
N41	30	80	DFT-QPSK	H	Edge_1RB_Right	19.07	PC2	PASS
N41	30	80	DFT-16QAM	H	Outer_Full	20.40	PC2	PASS
N41	30	80	DFT-16QAM	H	Inner_Full	21.42	PC2	PASS
N41	30	80	DFT-16QAM	H	Edge_1RB_Left	18.49	PC2	PASS
N41	30	80	DFT-16QAM	H	Edge_1RB_Right	18.97	PC2	PASS
N41	30	100	DFT-QPSK	L	Outer_Full	21.26	PC2	PASS
N41	30	100	DFT-QPSK	L	Inner_Full	22.37	PC2	PASS
N41	30	100	DFT-QPSK	L	Edge_1RB_Left	18.72	PC2	PASS
N41	30	100	DFT-QPSK	L	Edge_1RB_Right	18.59	PC2	PASS
N41	30	100	DFT-16QAM	L	Outer_Full	20.28	PC2	PASS
N41	30	100	DFT-16QAM	L	Inner_Full	21.31	PC2	PASS
N41	30	100	DFT-16QAM	L	Edge_1RB_Left	18.88	PC2	PASS
N41	30	100	DFT-16QAM	L	Edge_1RB_Right	18.80	PC2	PASS
N41	30	100	DFT-QPSK	M	Outer_Full	21.32	PC2	PASS
N41	30	100	DFT-QPSK	M	Inner_Full	22.34	PC2	PASS
N41	30	100	DFT-QPSK	M	Edge_1RB_Left	18.37	PC2	PASS
N41	30	100	DFT-QPSK	M	Edge_1RB_Right	18.52	PC2	PASS
N41	30	100	DFT-16QAM	M	Outer_Full	20.29	PC2	PASS
N41	30	100	DFT-16QAM	M	Inner_Full	21.27	PC2	PASS
N41	30	100	DFT-16QAM	M	Edge_1RB_Left	18.13	PC2	PASS
N41	30	100	DFT-16QAM	M	Edge_1RB_Right	18.34	PC2	PASS
N41	30	100	DFT-QPSK	H	Outer_Full	21.43	PC2	PASS
N41	30	100	DFT-QPSK	H	Inner_Full	22.69	PC2	PASS
N41	30	100	DFT-QPSK	H	Edge_1RB_Left	18.66	PC2	PASS
N41	30	100	DFT-QPSK	H	Edge_1RB_Right	18.94	PC2	PASS
N41	30	100	DFT-16QAM	H	Outer_Full	20.38	PC2	PASS
N41	30	100	DFT-16QAM	H	Inner_Full	21.50	PC2	PASS
N41	30	100	DFT-16QAM	H	Edge_1RB_Left	18.55	PC2	PASS
N41	30	100	DFT-16QAM	H	Edge_1RB_Right	18.85	PC2	PASS

5G NR(P4): Sensor ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N66	15	5	DFT-QPSK	L	Outer_Full	20.66	PC3	PASS
N66	15	5	DFT-QPSK	L	Inner_Full	21.71	PC3	PASS
N66	15	5	DFT-QPSK	L	Edge_1RB_Left	21.04	PC3	PASS
N66	15	5	DFT-QPSK	L	Edge_1RB_Right	20.86	PC3	PASS
N66	15	5	DFT-16QAM	L	Outer_Full	19.67	PC3	PASS
N66	15	5	DFT-16QAM	L	Inner_Full	20.73	PC3	PASS
N66	15	5	DFT-16QAM	L	Edge_1RB_Left	19.56	PC3	PASS
N66	15	5	DFT-16QAM	L	Edge_1RB_Right	19.43	PC3	PASS
N66	15	5	DFT-QPSK	M	Outer_Full	20.64	PC3	PASS
N66	15	5	DFT-QPSK	M	Inner_Full	21.61	PC3	PASS
N66	15	5	DFT-QPSK	M	Edge_1RB_Left	20.84	PC3	PASS
N66	15	5	DFT-QPSK	M	Edge_1RB_Right	20.83	PC3	PASS
N66	15	5	DFT-16QAM	M	Outer_Full	19.55	PC3	PASS
N66	15	5	DFT-16QAM	M	Inner_Full	20.54	PC3	PASS
N66	15	5	DFT-16QAM	M	Edge_1RB_Left	19.88	PC3	PASS
N66	15	5	DFT-16QAM	M	Edge_1RB_Right	19.87	PC3	PASS
N66	15	5	DFT-QPSK	H	Outer_Full	20.45	PC3	PASS
N66	15	5	DFT-QPSK	H	Inner_Full	21.43	PC3	PASS
N66	15	5	DFT-QPSK	H	Edge_1RB_Left	20.43	PC3	PASS
N66	15	5	DFT-QPSK	H	Edge_1RB_Right	20.45	PC3	PASS
N66	15	5	DFT-16QAM	H	Outer_Full	19.51	PC3	PASS
N66	15	5	DFT-16QAM	H	Inner_Full	20.37	PC3	PASS
N66	15	5	DFT-16QAM	H	Edge_1RB_Left	19.65	PC3	PASS
N66	15	5	DFT-16QAM	H	Edge_1RB_Right	19.68	PC3	PASS
N66	15	10	DFT-QPSK	L	Outer_Full	20.69	PC3	PASS
N66	15	10	DFT-QPSK	L	Inner_Full	21.68	PC3	PASS
N66	15	10	DFT-QPSK	L	Edge_1RB_Left	20.96	PC3	PASS
N66	15	10	DFT-QPSK	L	Edge_1RB_Right	20.83	PC3	PASS
N66	15	10	DFT-16QAM	L	Outer_Full	19.66	PC3	PASS
N66	15	10	DFT-16QAM	L	Inner_Full	20.68	PC3	PASS
N66	15	10	DFT-16QAM	L	Edge_1RB_Left	19.83	PC3	PASS
N66	15	10	DFT-16QAM	L	Edge_1RB_Right	19.71	PC3	PASS
N66	15	10	DFT-QPSK	M	Outer_Full	20.65	PC3	PASS
N66	15	10	DFT-QPSK	M	Inner_Full	21.69	PC3	PASS
N66	15	10	DFT-QPSK	M	Edge_1RB_Left	20.68	PC3	PASS
N66	15	10	DFT-QPSK	M	Edge_1RB_Right	20.63	PC3	PASS
N66	15	10	DFT-16QAM	M	Outer_Full	19.66	PC3	PASS
N66	15	10	DFT-16QAM	M	Inner_Full	20.59	PC3	PASS

N66	15	10	DFT-16QAM	M	Edge_1RB_Left	19.52	PC3	PASS
N66	15	10	DFT-16QAM	M	Edge_1RB_Right	19.46	PC3	PASS
N66	15	10	DFT-QPSK	H	Outer_Full	20.42	PC3	PASS
N66	15	10	DFT-QPSK	H	Inner_Full	21.41	PC3	PASS
N66	15	10	DFT-QPSK	H	Edge_1RB_Left	20.07	PC3	PASS
N66	15	10	DFT-QPSK	H	Edge_1RB_Right	20.10	PC3	PASS
N66	15	10	DFT-16QAM	H	Outer_Full	19.45	PC3	PASS
N66	15	10	DFT-16QAM	H	Inner_Full	20.32	PC3	PASS
N66	15	10	DFT-16QAM	H	Edge_1RB_Left	19.38	PC3	PASS
N66	15	10	DFT-16QAM	H	Edge_1RB_Right	19.38	PC3	PASS
N66	15	15	DFT-QPSK	L	Outer_Full	20.76	PC3	PASS
N66	15	15	DFT-QPSK	L	Inner_Full	21.68	PC3	PASS
N66	15	15	DFT-QPSK	L	Edge_1RB_Left	20.77	PC3	PASS
N66	15	15	DFT-QPSK	L	Edge_1RB_Right	20.72	PC3	PASS
N66	15	15	DFT-16QAM	L	Outer_Full	19.75	PC3	PASS
N66	15	15	DFT-16QAM	L	Inner_Full	20.58	PC3	PASS
N66	15	15	DFT-16QAM	L	Edge_1RB_Left	19.57	PC3	PASS
N66	15	15	DFT-16QAM	L	Edge_1RB_Right	19.51	PC3	PASS
N66	15	15	DFT-QPSK	M	Outer_Full	20.70	PC3	PASS
N66	15	15	DFT-QPSK	M	Inner_Full	21.70	PC3	PASS
N66	15	15	DFT-QPSK	M	Edge_1RB_Left	20.75	PC3	PASS
N66	15	15	DFT-QPSK	M	Edge_1RB_Right	20.66	PC3	PASS
N66	15	15	DFT-16QAM	M	Outer_Full	19.68	PC3	PASS
N66	15	15	DFT-16QAM	M	Inner_Full	20.65	PC3	PASS
N66	15	15	DFT-16QAM	M	Edge_1RB_Left	19.66	PC3	PASS
N66	15	15	DFT-16QAM	M	Edge_1RB_Right	19.59	PC3	PASS
N66	15	15	DFT-QPSK	H	Outer_Full	20.50	PC3	PASS
N66	15	15	DFT-QPSK	H	Inner_Full	21.44	PC3	PASS
N66	15	15	DFT-QPSK	H	Edge_1RB_Left	20.69	PC3	PASS
N66	15	15	DFT-QPSK	H	Edge_1RB_Right	20.70	PC3	PASS
N66	15	15	DFT-16QAM	H	Outer_Full	19.46	PC3	PASS
N66	15	15	DFT-16QAM	H	Inner_Full	20.49	PC3	PASS
N66	15	15	DFT-16QAM	H	Edge_1RB_Left	19.83	PC3	PASS
N66	15	15	DFT-16QAM	H	Edge_1RB_Right	19.80	PC3	PASS
N66	15	20	DFT-QPSK	L	Outer_Full	20.61	PC3	PASS
N66	15	20	DFT-QPSK	L	Inner_Full	21.64	PC3	PASS
N66	15	20	DFT-QPSK	L	Edge_1RB_Left	20.89	PC3	PASS
N66	15	20	DFT-QPSK	L	Edge_1RB_Right	20.87	PC3	PASS
N66	15	20	DFT-16QAM	L	Outer_Full	19.64	PC3	PASS
N66	15	20	DFT-16QAM	L	Inner_Full	20.66	PC3	PASS
N66	15	20	DFT-16QAM	L	Edge_1RB_Left	19.83	PC3	PASS
N66	15	20	DFT-16QAM	L	Edge_1RB_Right	19.76	PC3	PASS

N66	15	20	DFT-QPSK	M	Outer_Full	20.69	PC3	PASS
N66	15	20	DFT-QPSK	M	Inner_Full	21.76	PC3	PASS
N66	15	20	DFT-QPSK	M	Edge_1RB_Left	20.86	PC3	PASS
N66	15	20	DFT-QPSK	M	Edge_1RB_Right	20.74	PC3	PASS
N66	15	20	DFT-16QAM	M	Outer_Full	19.71	PC3	PASS
N66	15	20	DFT-16QAM	M	Inner_Full	20.63	PC3	PASS
N66	15	20	DFT-16QAM	M	Edge_1RB_Left	20.28	PC3	PASS
N66	15	20	DFT-16QAM	M	Edge_1RB_Right	20.20	PC3	PASS
N66	15	20	DFT-QPSK	H	Outer_Full	20.46	PC3	PASS
N66	15	20	DFT-QPSK	H	Inner_Full	21.46	PC3	PASS
N66	15	20	DFT-QPSK	H	Edge_1RB_Left	20.55	PC3	PASS
N66	15	20	DFT-QPSK	H	Edge_1RB_Right	20.56	PC3	PASS
N66	15	20	DFT-16QAM	H	Outer_Full	19.39	PC3	PASS
N66	15	20	DFT-16QAM	H	Inner_Full	20.48	PC3	PASS
N66	15	20	DFT-16QAM	H	Edge_1RB_Left	19.47	PC3	PASS
N66	15	20	DFT-16QAM	H	Edge_1RB_Right	19.42	PC3	PASS

5G NR(P4): N77_3450-3550MHz

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N77-3450-3550	30	10	DFT-QPSK	L	Outer_Full	21.89	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Inner_Full	22.81	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Edge_1RB_Left	19.42	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Edge_1RB_Right	19.50	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	L	Outer_Full	20.87	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	L	Inner_Full	21.85	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	L	Edge_1RB_Left	19.73	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	L	Edge_1RB_Right	19.78	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Outer_Full	22.00	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Inner_Full	22.96	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Edge_1RB_Left	19.54	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Edge_1RB_Right	19.39	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	M	Outer_Full	21.01	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	M	Inner_Full	21.86	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	M	Edge_1RB_Left	19.61	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	M	Edge_1RB_Right	19.49	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Outer_Full	21.44	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Inner_Full	22.49	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Edge_1RB_Left	19.02	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Edge_1RB_Right	19.03	PC2	PASS

N77-3450-3550	30	10	DFT-16QAM	H	Outer_Full	20.41	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	H	Inner_Full	21.45	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	H	Edge_1RB_Left	18.99	PC2	PASS
N77-3450-3550	30	10	DFT-16QAM	H	Edge_1RB_Right	19.01	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Outer_Full	21.88	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Inner_Full	22.92	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Edge_1RB_Left	19.09	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Edge_1RB_Right	19.18	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	L	Outer_Full	20.96	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	L	Inner_Full	21.91	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	L	Edge_1RB_Left	19.44	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	L	Edge_1RB_Right	19.49	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Outer_Full	22.02	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Inner_Full	22.92	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Edge_1RB_Left	19.57	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Edge_1RB_Right	19.40	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	M	Outer_Full	20.94	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	M	Inner_Full	21.97	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	M	Edge_1RB_Left	19.19	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	M	Edge_1RB_Right	19.04	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Outer_Full	21.55	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Inner_Full	22.47	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Edge_1RB_Left	19.08	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Edge_1RB_Right	19.04	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	H	Outer_Full	20.56	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	H	Inner_Full	21.44	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	H	Edge_1RB_Left	18.89	PC2	PASS
N77-3450-3550	30	15	DFT-16QAM	H	Edge_1RB_Right	18.86	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Outer_Full	21.97	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Inner_Full	22.92	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Edge_1RB_Left	19.30	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Edge_1RB_Right	19.49	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	L	Outer_Full	20.89	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	L	Inner_Full	21.88	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	L	Edge_1RB_Left	19.79	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	L	Edge_1RB_Right	19.93	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Outer_Full	21.93	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Inner_Full	22.98	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Edge_1RB_Left	19.62	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Edge_1RB_Right	19.43	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	M	Outer_Full	20.90	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	M	Inner_Full	21.93	PC2	PASS

N77-3450-3550	30	20	DFT-16QAM	M	Edge_1RB_Left	19.62	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	M	Edge_1RB_Right	19.44	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Outer_Full	21.47	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Inner_Full	22.54	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Edge_1RB_Left	19.12	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Edge_1RB_Right	18.99	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	H	Outer_Full	20.52	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	H	Inner_Full	21.43	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	H	Edge_1RB_Left	19.10	PC2	PASS
N77-3450-3550	30	20	DFT-16QAM	H	Edge_1RB_Right	18.94	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Outer_Full	22.00	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Inner_Full	22.98	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Edge_1RB_Left	19.41	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Edge_1RB_Right	19.50	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	L	Outer_Full	20.97	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	L	Inner_Full	22.04	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	L	Edge_1RB_Left	19.57	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	L	Edge_1RB_Right	19.72	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Outer_Full	21.98	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Inner_Full	22.91	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Edge_1RB_Left	19.75	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Edge_1RB_Right	19.36	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	M	Outer_Full	20.89	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	M	Inner_Full	21.95	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	M	Edge_1RB_Left	19.22	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	M	Edge_1RB_Right	18.87	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Outer_Full	21.57	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Inner_Full	22.63	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Edge_1RB_Left	19.15	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Edge_1RB_Right	18.96	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	H	Outer_Full	20.64	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	H	Inner_Full	21.65	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	H	Edge_1RB_Left	19.17	PC2	PASS
N77-3450-3550	30	40	DFT-16QAM	H	Edge_1RB_Right	18.92	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Outer_Full	22.00	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Inner_Full	23.07	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Edge_1RB_Left	19.39	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Edge_1RB_Right	19.39	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	L	Outer_Full	21.02	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	L	Inner_Full	22.05	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	L	Edge_1RB_Left	19.69	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	L	Edge_1RB_Right	19.67	PC2	PASS

N77-3450-3550	30	50	DFT-QPSK	M	Outer_Full	21.97	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Inner_Full	23.01	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Edge_1RB_Left	19.79	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Edge_1RB_Right	19.42	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	M	Outer_Full	21.00	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	M	Inner_Full	21.94	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	M	Edge_1RB_Left	19.73	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	M	Edge_1RB_Right	19.36	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Outer_Full	21.67	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Inner_Full	22.69	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Edge_1RB_Left	19.35	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Edge_1RB_Right	19.03	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	H	Outer_Full	20.60	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	H	Inner_Full	21.65	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	H	Edge_1RB_Left	19.34	PC2	PASS
N77-3450-3550	30	50	DFT-16QAM	H	Edge_1RB_Right	19.00	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Outer_Full	21.96	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Inner_Full	22.97	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Edge_1RB_Left	19.29	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Edge_1RB_Right	19.13	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	L	Outer_Full	20.97	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	L	Inner_Full	21.99	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	L	Edge_1RB_Left	19.40	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	L	Edge_1RB_Right	19.26	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Outer_Full	21.94	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Inner_Full	22.94	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Edge_1RB_Left	19.63	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Edge_1RB_Right	19.20	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	M	Outer_Full	20.94	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	M	Inner_Full	22.00	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	M	Edge_1RB_Left	19.36	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	M	Edge_1RB_Right	18.90	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Outer_Full	21.74	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Inner_Full	22.74	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Edge_1RB_Left	19.52	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Edge_1RB_Right	19.05	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	H	Outer_Full	20.80	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	H	Inner_Full	21.74	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	H	Edge_1RB_Left	19.38	PC2	PASS
N77-3450-3550	30	60	DFT-16QAM	H	Edge_1RB_Right	18.94	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Outer_Full	21.99	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Inner_Full	23.06	PC2	PASS

N77-3450-3550	30	80	DFT-QPSK	L	Edge_1RB_Left	19.56	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Edge_1RB_Right	19.24	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	L	Outer_Full	20.96	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	L	Inner_Full	22.09	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	L	Edge_1RB_Left	19.82	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	L	Edge_1RB_Right	19.55	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Outer_Full	22.05	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Inner_Full	23.04	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Edge_1RB_Left	19.74	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Edge_1RB_Right	19.31	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	M	Outer_Full	21.03	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	M	Inner_Full	22.06	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	M	Edge_1RB_Left	19.69	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	M	Edge_1RB_Right	19.19	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Outer_Full	21.95	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Inner_Full	23.00	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Edge_1RB_Left	19.73	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Edge_1RB_Right	19.19	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	H	Outer_Full	20.94	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	H	Inner_Full	21.95	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	H	Edge_1RB_Left	19.71	PC2	PASS
N77-3450-3550	30	80	DFT-16QAM	H	Edge_1RB_Right	19.16	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Outer_Full	21.99	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Inner_Full	23.07	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Edge_1RB_Left	19.44	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Edge_1RB_Right	18.98	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	L	Outer_Full	21.02	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	L	Inner_Full	22.06	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	L	Edge_1RB_Left	19.60	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	L	Edge_1RB_Right	19.14	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Outer_Full	22.04	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Inner_Full	23.10	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Edge_1RB_Left	19.58	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Edge_1RB_Right	19.15	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	M	Outer_Full	21.04	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	M	Inner_Full	22.08	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	M	Edge_1RB_Left	19.30	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	M	Edge_1RB_Right	18.85	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Outer_Full	22.02	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Inner_Full	23.08	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Edge_1RB_Left	19.62	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Edge_1RB_Right	19.17	PC2	PASS

N77-3450-3550	30	90	DFT-16QAM	H	Outer_Full	21.06	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	H	Inner_Full	22.06	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	H	Edge_1RB_Left	19.50	PC2	PASS
N77-3450-3550	30	90	DFT-16QAM	H	Edge_1RB_Right	19.01	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	L	Outer_Full	22.03	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	L	Inner_Full	23.10	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	L	Edge_1RB_Left	19.43	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	L	Edge_1RB_Right	19.04	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	L	Outer_Full	21.05	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	L	Inner_Full	22.08	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	L	Edge_1RB_Left	19.72	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	L	Edge_1RB_Right	19.34	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Outer_Full	22.06	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Inner_Full	23.09	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Edge_1RB_Left	19.45	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Edge_1RB_Right	19.01	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	M	Outer_Full	21.02	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	M	Inner_Full	22.08	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	M	Edge_1RB_Left	19.71	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	M	Edge_1RB_Right	19.31	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	H	Outer_Full	22.03	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	H	Inner_Full	23.11	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	H	Edge_1RB_Left	19.49	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	H	Edge_1RB_Right	18.99	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	H	Outer_Full	21.10	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	H	Inner_Full	22.10	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	H	Edge_1RB_Left	19.77	PC2	PASS
N77-3450-3550	30	100	DFT-16QAM	H	Edge_1RB_Right	19.32	PC2	PASS

5G NR(P4): N77_3700-3980MHz

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N77-3700-3980	30	10	DFT-QPSK	L	Outer_Full	21.71	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Inner_Full	22.65	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Edge_1RB_Left	19.19	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Edge_1RB_Right	19.28	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	L	Outer_Full	20.67	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	L	Inner_Full	21.75	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	L	Edge_1RB_Left	19.51	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	L	Edge_1RB_Right	19.63	PC2	PASS

N77-3700-3980	30	10	DFT-QPSK	M	Outer_Full	22.21	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Inner_Full	23.25	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Edge_1RB_Left	19.71	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Edge_1RB_Right	19.68	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	M	Outer_Full	21.18	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	M	Inner_Full	22.09	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	M	Edge_1RB_Left	19.76	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	M	Edge_1RB_Right	19.71	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Outer_Full	22.18	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Inner_Full	23.21	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Edge_1RB_Left	19.78	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Edge_1RB_Right	19.81	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	H	Outer_Full	21.18	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	H	Inner_Full	22.25	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	H	Edge_1RB_Left	19.74	PC2	PASS
N77-3700-3980	30	10	DFT-16QAM	H	Edge_1RB_Right	19.79	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Outer_Full	21.73	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Inner_Full	22.69	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Edge_1RB_Left	18.89	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Edge_1RB_Right	19.00	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	L	Outer_Full	20.78	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	L	Inner_Full	21.74	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	L	Edge_1RB_Left	19.11	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	L	Edge_1RB_Right	19.27	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Outer_Full	22.17	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Inner_Full	23.12	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Edge_1RB_Left	19.69	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Edge_1RB_Right	19.65	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	M	Outer_Full	21.16	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	M	Inner_Full	22.20	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	M	Edge_1RB_Left	19.35	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	M	Edge_1RB_Right	19.25	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Outer_Full	22.27	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Inner_Full	23.22	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Edge_1RB_Left	19.86	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Edge_1RB_Right	19.91	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	H	Outer_Full	21.33	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	H	Inner_Full	22.17	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	H	Edge_1RB_Left	19.63	PC2	PASS
N77-3700-3980	30	15	DFT-16QAM	H	Edge_1RB_Right	19.70	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Outer_Full	21.75	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Inner_Full	22.75	PC2	PASS

N77-3700-3980	30	20	DFT-QPSK	L	Edge_1RB_Left	19.06	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Edge_1RB_Right	19.19	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	L	Outer_Full	20.67	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	L	Inner_Full	21.70	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	L	Edge_1RB_Left	19.49	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	L	Edge_1RB_Right	19.64	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Outer_Full	22.13	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Inner_Full	23.14	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Edge_1RB_Left	19.68	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Edge_1RB_Right	19.66	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	M	Outer_Full	21.07	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	M	Inner_Full	22.14	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	M	Edge_1RB_Left	19.75	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	M	Edge_1RB_Right	19.74	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Outer_Full	22.25	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Inner_Full	23.29	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Edge_1RB_Left	19.75	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Edge_1RB_Right	19.90	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	H	Outer_Full	21.28	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	H	Inner_Full	22.20	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	H	Edge_1RB_Left	19.71	PC2	PASS
N77-3700-3980	30	20	DFT-16QAM	H	Edge_1RB_Right	19.83	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Outer_Full	21.70	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Inner_Full	22.67	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Edge_1RB_Left	19.01	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Edge_1RB_Right	19.36	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	L	Outer_Full	20.67	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	L	Inner_Full	21.68	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	L	Edge_1RB_Left	19.21	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	L	Edge_1RB_Right	19.57	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Outer_Full	22.19	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Inner_Full	23.17	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Edge_1RB_Left	19.68	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Edge_1RB_Right	19.80	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	M	Outer_Full	21.18	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	M	Inner_Full	22.22	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	M	Edge_1RB_Left	19.17	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	M	Edge_1RB_Right	19.31	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Outer_Full	22.10	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Inner_Full	23.14	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Edge_1RB_Left	19.35	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Edge_1RB_Right	19.83	PC2	PASS

N77-3700-3980	30	40	DFT-16QAM	H	Outer_Full	21.15	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	H	Inner_Full	22.17	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	H	Edge_1RB_Left	19.30	PC2	PASS
N77-3700-3980	30	40	DFT-16QAM	H	Edge_1RB_Right	19.79	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Outer_Full	21.85	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Inner_Full	22.86	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Edge_1RB_Left	19.13	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Edge_1RB_Right	19.40	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	L	Outer_Full	20.88	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	L	Inner_Full	21.85	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	L	Edge_1RB_Left	19.40	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	L	Edge_1RB_Right	19.67	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Outer_Full	22.20	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Inner_Full	23.23	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Edge_1RB_Left	19.74	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Edge_1RB_Right	19.87	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	M	Outer_Full	21.16	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	M	Inner_Full	22.14	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	M	Edge_1RB_Left	19.67	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	M	Edge_1RB_Right	19.80	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Outer_Full	22.13	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Inner_Full	23.05	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Edge_1RB_Left	19.50	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Edge_1RB_Right	19.92	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	H	Outer_Full	21.06	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	H	Inner_Full	22.01	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	H	Edge_1RB_Left	19.51	PC2	PASS
N77-3700-3980	30	50	DFT-16QAM	H	Edge_1RB_Right	19.83	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Outer_Full	21.79	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Inner_Full	22.85	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Edge_1RB_Left	19.02	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Edge_1RB_Right	19.24	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	L	Outer_Full	20.82	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	L	Inner_Full	21.84	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	L	Edge_1RB_Left	19.14	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	L	Edge_1RB_Right	19.40	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Outer_Full	22.15	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Inner_Full	23.16	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Edge_1RB_Left	19.62	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Edge_1RB_Right	19.74	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	M	Outer_Full	21.20	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	M	Inner_Full	22.21	PC2	PASS

N77-3700-3980	30	60	DFT-16QAM	M	Edge_1RB_Left	19.32	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	M	Edge_1RB_Right	19.42	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Outer_Full	22.08	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Inner_Full	22.97	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Edge_1RB_Left	19.40	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Edge_1RB_Right	19.84	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	H	Outer_Full	21.05	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	H	Inner_Full	21.96	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	H	Edge_1RB_Left	19.28	PC2	PASS
N77-3700-3980	30	60	DFT-16QAM	H	Edge_1RB_Right	19.73	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Outer_Full	22.25	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Inner_Full	23.29	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Edge_1RB_Left	19.56	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Edge_1RB_Right	19.82	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	L	Outer_Full	21.23	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	L	Inner_Full	22.26	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	L	Edge_1RB_Left	19.85	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	L	Edge_1RB_Right	20.16	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Outer_Full	22.21	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Inner_Full	23.22	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Edge_1RB_Left	19.74	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Edge_1RB_Right	19.82	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	M	Outer_Full	21.23	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	M	Inner_Full	22.25	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	M	Edge_1RB_Left	19.69	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	M	Edge_1RB_Right	19.75	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Outer_Full	22.22	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Inner_Full	23.17	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Edge_1RB_Left	19.73	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Edge_1RB_Right	20.05	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	H	Outer_Full	21.22	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	H	Inner_Full	22.12	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	H	Edge_1RB_Left	19.68	PC2	PASS
N77-3700-3980	30	80	DFT-16QAM	H	Edge_1RB_Right	20.00	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Outer_Full	22.27	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Inner_Full	23.29	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Edge_1RB_Left	19.42	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Edge_1RB_Right	19.60	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	L	Outer_Full	21.31	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	L	Inner_Full	22.28	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	L	Edge_1RB_Left	19.55	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	L	Edge_1RB_Right	19.80	PC2	PASS

N77-3700-3980	30	90	DFT-QPSK	M	Outer_Full	22.22	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Inner_Full	23.27	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Edge_1RB_Left	19.46	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Edge_1RB_Right	19.67	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	M	Outer_Full	21.22	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	M	Inner_Full	22.24	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	M	Edge_1RB_Left	19.17	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	M	Edge_1RB_Right	19.35	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Outer_Full	22.22	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Inner_Full	23.12	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Edge_1RB_Left	19.68	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Edge_1RB_Right	19.97	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	H	Outer_Full	21.21	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	H	Inner_Full	22.13	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	H	Edge_1RB_Left	19.59	PC2	PASS
N77-3700-3980	30	90	DFT-16QAM	H	Edge_1RB_Right	19.90	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Outer_Full	22.24	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Inner_Full	23.30	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Edge_1RB_Left	19.31	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Edge_1RB_Right	19.65	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	L	Outer_Full	21.30	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	L	Inner_Full	22.26	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	L	Edge_1RB_Left	19.61	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	L	Edge_1RB_Right	19.99	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Outer_Full	22.22	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Inner_Full	23.20	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Edge_1RB_Left	19.37	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Edge_1RB_Right	19.65	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	M	Outer_Full	21.22	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	M	Inner_Full	22.20	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	M	Edge_1RB_Left	19.29	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	M	Edge_1RB_Right	19.61	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Outer_Full	22.18	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Inner_Full	23.11	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Edge_1RB_Left	19.40	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Edge_1RB_Right	19.85	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	H	Outer_Full	21.18	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	H	Inner_Full	22.08	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	H	Edge_1RB_Left	19.40	PC2	PASS
N77-3700-3980	30	100	DFT-16QAM	H	Edge_1RB_Right	19.81	PC2	PASS

5G NR EN_DC(P1):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
DC_7A_n2A	15	5+5	DFT-QPSK	M+L	Outer_Full	22.25	PC3	PASS
DC_7A_n2A	15	5+5	DFT-QPSK	M+L	Inner_Full	23.17	PC3	PASS
DC_7A_n2A	15	5+5	DFT-QPSK	M+L	Edge_1RB_Left	22.40	PC3	PASS
DC_7A_n2A	15	5+5	DFT-QPSK	M+L	Edge_1RB_Right	22.21	PC3	PASS
DC_7A_n2A	15	5+5	DFT-16QAM	M+L	Outer_Full	21.30	PC3	PASS
DC_7A_n2A	15	5+5	DFT-16QAM	M+L	Inner_Full	22.26	PC3	PASS
DC_7A_n2A	15	5+5	DFT-16QAM	M+L	Edge_1RB_Left	21.35	PC3	PASS
DC_7A_n2A	15	5+5	DFT-16QAM	M+L	Edge_1RB_Right	21.40	PC3	PASS
DC_7A_n2A	15	5+5	DFT-QPSK	M+M	Outer_Full	20.90	PC3	PASS
DC_7A_n2A	15	5+5	DFT-QPSK	M+M	Inner_Full	21.87	PC3	PASS
DC_7A_n2A	15	5+5	DFT-QPSK	M+M	Edge_1RB_Left	21.06	PC3	PASS
DC_7A_n2A	15	5+5	DFT-QPSK	M+M	Edge_1RB_Right	20.85	PC3	PASS
DC_7A_n2A	15	5+5	DFT-16QAM	M+M	Outer_Full	20.87	PC3	PASS
DC_7A_n2A	15	5+5	DFT-16QAM	M+M	Inner_Full	20.87	PC3	PASS
DC_7A_n2A	15	5+5	DFT-16QAM	M+M	Edge_1RB_Left	20.27	PC3	PASS
DC_7A_n2A	15	5+5	DFT-16QAM	M+M	Edge_1RB_Right	20.08	PC3	PASS
DC_7A_n2A	15	5+5	DFT-QPSK	M+H	Outer_Full	20.48	PC3	PASS
DC_7A_n2A	15	5+5	DFT-QPSK	M+H	Inner_Full	20.42	PC3	PASS
DC_7A_n2A	15	5+5	DFT-QPSK	M+H	Edge_1RB_Left	20.65	PC3	PASS
DC_7A_n2A	15	5+5	DFT-QPSK	M+H	Edge_1RB_Right	20.43	PC3	PASS
DC_7A_n2A	15	5+5	DFT-16QAM	M+H	Outer_Full	20.55	PC3	PASS
DC_7A_n2A	15	5+5	DFT-16QAM	M+H	Inner_Full	20.42	PC3	PASS
DC_7A_n2A	15	5+5	DFT-16QAM	M+H	Edge_1RB_Left	20.83	PC3	PASS
DC_7A_n2A	15	5+5	DFT-16QAM	M+H	Edge_1RB_Right	20.64	PC3	PASS
DC_7A_n2A	15	5+10	DFT-QPSK	M+L	Outer_Full	22.11	PC3	PASS
DC_7A_n2A	15	5+10	DFT-QPSK	M+L	Inner_Full	23.18	PC3	PASS
DC_7A_n2A	15	5+10	DFT-QPSK	M+L	Edge_1RB_Left	22.30	PC3	PASS
DC_7A_n2A	15	5+10	DFT-QPSK	M+L	Edge_1RB_Right	21.91	PC3	PASS
DC_7A_n2A	15	5+10	DFT-16QAM	M+L	Outer_Full	21.10	PC3	PASS
DC_7A_n2A	15	5+10	DFT-16QAM	M+L	Inner_Full	22.12	PC3	PASS
DC_7A_n2A	15	5+10	DFT-16QAM	M+L	Edge_1RB_Left	21.56	PC3	PASS
DC_7A_n2A	15	5+10	DFT-16QAM	M+L	Edge_1RB_Right	21.10	PC3	PASS
DC_7A_n2A	15	5+10	DFT-QPSK	M+M	Outer_Full	20.88	PC3	PASS
DC_7A_n2A	15	5+10	DFT-QPSK	M+M	Inner_Full	21.87	PC3	PASS
DC_7A_n2A	15	5+10	DFT-QPSK	M+M	Edge_1RB_Left	21.19	PC3	PASS
DC_7A_n2A	15	5+10	DFT-QPSK	M+M	Edge_1RB_Right	20.72	PC3	PASS
DC_7A_n2A	15	5+10	DFT-16QAM	M+M	Outer_Full	20.83	PC3	PASS
DC_7A_n2A	15	5+10	DFT-16QAM	M+M	Inner_Full	20.86	PC3	PASS

DC_7A_n2A	15	5+10	DFT-16QAM	M+M	Edge_1RB_Left	20.40	PC3	PASS
DC_7A_n2A	15	5+10	DFT-16QAM	M+M	Edge_1RB_Right	20.90	PC3	PASS
DC_7A_n2A	15	5+10	DFT-QPSK	M+H	Outer_Full	20.61	PC3	PASS
DC_7A_n2A	15	5+10	DFT-QPSK	M+H	Inner_Full	20.66	PC3	PASS
DC_7A_n2A	15	5+10	DFT-QPSK	M+H	Edge_1RB_Left	20.97	PC3	PASS
DC_7A_n2A	15	5+10	DFT-QPSK	M+H	Edge_1RB_Right	20.43	PC3	PASS
DC_7A_n2A	15	5+10	DFT-16QAM	M+H	Outer_Full	20.60	PC3	PASS
DC_7A_n2A	15	5+10	DFT-16QAM	M+H	Inner_Full	20.61	PC3	PASS
DC_7A_n2A	15	5+10	DFT-16QAM	M+H	Edge_1RB_Left	20.24	PC3	PASS
DC_7A_n2A	15	5+10	DFT-16QAM	M+H	Edge_1RB_Right	20.04	PC3	PASS
DC_7A_n2A	15	5+15	DFT-QPSK	M+L	Outer_Full	22.01	PC3	PASS
DC_7A_n2A	15	5+15	DFT-QPSK	M+L	Inner_Full	22.94	PC3	PASS
DC_7A_n2A	15	5+15	DFT-QPSK	M+L	Edge_1RB_Left	22.12	PC3	PASS
DC_7A_n2A	15	5+15	DFT-QPSK	M+L	Edge_1RB_Right	21.72	PC3	PASS
DC_7A_n2A	15	5+15	DFT-16QAM	M+L	Outer_Full	20.98	PC3	PASS
DC_7A_n2A	15	5+15	DFT-16QAM	M+L	Inner_Full	22.00	PC3	PASS
DC_7A_n2A	15	5+15	DFT-16QAM	M+L	Edge_1RB_Left	21.07	PC3	PASS
DC_7A_n2A	15	5+15	DFT-16QAM	M+L	Edge_1RB_Right	20.24	PC3	PASS
DC_7A_n2A	15	5+15	DFT-QPSK	M+M	Outer_Full	20.90	PC3	PASS
DC_7A_n2A	15	5+15	DFT-QPSK	M+M	Inner_Full	21.80	PC3	PASS
DC_7A_n2A	15	5+15	DFT-QPSK	M+M	Edge_1RB_Left	21.28	PC3	PASS
DC_7A_n2A	15	5+15	DFT-QPSK	M+M	Edge_1RB_Right	20.60	PC3	PASS
DC_7A_n2A	15	5+15	DFT-16QAM	M+M	Outer_Full	20.90	PC3	PASS
DC_7A_n2A	15	5+15	DFT-16QAM	M+M	Inner_Full	20.88	PC3	PASS
DC_7A_n2A	15	5+15	DFT-16QAM	M+M	Edge_1RB_Left	20.49	PC3	PASS
DC_7A_n2A	15	5+15	DFT-16QAM	M+M	Edge_1RB_Right	20.37	PC3	PASS
DC_7A_n2A	15	5+15	DFT-QPSK	M+H	Outer_Full	20.83	PC3	PASS
DC_7A_n2A	15	5+15	DFT-QPSK	M+H	Inner_Full	20.86	PC3	PASS
DC_7A_n2A	15	5+15	DFT-QPSK	M+H	Edge_1RB_Left	20.20	PC3	PASS
DC_7A_n2A	15	5+15	DFT-QPSK	M+H	Edge_1RB_Right	20.42	PC3	PASS
DC_7A_n2A	15	5+15	DFT-16QAM	M+H	Outer_Full	20.79	PC3	PASS
DC_7A_n2A	15	5+15	DFT-16QAM	M+H	Inner_Full	20.78	PC3	PASS
DC_7A_n2A	15	5+15	DFT-16QAM	M+H	Edge_1RB_Left	20.96	PC3	PASS
DC_7A_n2A	15	5+15	DFT-16QAM	M+H	Edge_1RB_Right	20.62	PC3	PASS
DC_7A_n2A	15	5+20	DFT-QPSK	M+L	Outer_Full	21.95	PC3	PASS
DC_7A_n2A	15	5+20	DFT-QPSK	M+L	Inner_Full	23.24	PC3	PASS
DC_7A_n2A	15	5+20	DFT-QPSK	M+L	Edge_1RB_Left	22.17	PC3	PASS
DC_7A_n2A	15	5+20	DFT-QPSK	M+L	Edge_1RB_Right	21.48	PC3	PASS
DC_7A_n2A	15	5+20	DFT-16QAM	M+L	Outer_Full	20.94	PC3	PASS
DC_7A_n2A	15	5+20	DFT-16QAM	M+L	Inner_Full	21.93	PC3	PASS
DC_7A_n2A	15	5+20	DFT-16QAM	M+L	Edge_1RB_Left	21.59	PC3	PASS
DC_7A_n2A	15	5+20	DFT-16QAM	M+L	Edge_1RB_Right	20.68	PC3	PASS

DC_7A_n2A	15	5+20	DFT-QPSK	M+M	Outer_Full	20.90	PC3	PASS
DC_7A_n2A	15	5+20	DFT-QPSK	M+M	Inner_Full	21.86	PC3	PASS
DC_7A_n2A	15	5+20	DFT-QPSK	M+M	Edge_1RB_Left	21.47	PC3	PASS
DC_7A_n2A	15	5+20	DFT-QPSK	M+M	Edge_1RB_Right	20.55	PC3	PASS
DC_7A_n2A	15	5+20	DFT-16QAM	M+M	Outer_Full	20.89	PC3	PASS
DC_7A_n2A	15	5+20	DFT-16QAM	M+M	Inner_Full	20.80	PC3	PASS
DC_7A_n2A	15	5+20	DFT-16QAM	M+M	Edge_1RB_Left	20.30	PC3	PASS
DC_7A_n2A	15	5+20	DFT-16QAM	M+M	Edge_1RB_Right	20.85	PC3	PASS
DC_7A_n2A	15	5+20	DFT-QPSK	M+H	Outer_Full	20.95	PC3	PASS
DC_7A_n2A	15	5+20	DFT-QPSK	M+H	Inner_Full	20.98	PC3	PASS
DC_7A_n2A	15	5+20	DFT-QPSK	M+H	Edge_1RB_Left	20.43	PC3	PASS
DC_7A_n2A	15	5+20	DFT-QPSK	M+H	Edge_1RB_Right	20.52	PC3	PASS
DC_7A_n2A	15	5+20	DFT-16QAM	M+H	Outer_Full	20.92	PC3	PASS
DC_7A_n2A	15	5+20	DFT-16QAM	M+H	Inner_Full	20.91	PC3	PASS
DC_7A_n2A	15	5+20	DFT-16QAM	M+H	Edge_1RB_Left	20.61	PC3	PASS
DC_7A_n2A	15	5+20	DFT-16QAM	M+H	Edge_1RB_Right	20.17	PC3	PASS

5G NR EN_DC(P1):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
DC_66A_n5A	15	5+5	DFT-QPSK	M+L	Outer_Full	22.20	PC3	PASS
DC_66A_n5A	15	5+5	DFT-QPSK	M+L	Inner_Full	23.29	PC3	PASS
DC_66A_n5A	15	5+5	DFT-QPSK	M+L	Edge_1RB_Left	22.33	PC3	PASS
DC_66A_n5A	15	5+5	DFT-QPSK	M+L	Edge_1RB_Right	22.23	PC3	PASS
DC_66A_n5A	15	5+5	DFT-16QAM	M+L	Outer_Full	21.34	PC3	PASS
DC_66A_n5A	15	5+5	DFT-16QAM	M+L	Inner_Full	22.18	PC3	PASS
DC_66A_n5A	15	5+5	DFT-16QAM	M+L	Edge_1RB_Left	21.49	PC3	PASS
DC_66A_n5A	15	5+5	DFT-16QAM	M+L	Edge_1RB_Right	21.41	PC3	PASS
DC_66A_n5A	15	5+5	DFT-QPSK	M+M	Outer_Full	22.07	PC3	PASS
DC_66A_n5A	15	5+5	DFT-QPSK	M+M	Inner_Full	23.26	PC3	PASS
DC_66A_n5A	15	5+5	DFT-QPSK	M+M	Edge_1RB_Left	22.27	PC3	PASS
DC_66A_n5A	15	5+5	DFT-QPSK	M+M	Edge_1RB_Right	22.47	PC3	PASS
DC_66A_n5A	15	5+5	DFT-16QAM	M+M	Outer_Full	21.27	PC3	PASS
DC_66A_n5A	15	5+5	DFT-16QAM	M+M	Inner_Full	22.28	PC3	PASS
DC_66A_n5A	15	5+5	DFT-16QAM	M+M	Edge_1RB_Left	21.21	PC3	PASS
DC_66A_n5A	15	5+5	DFT-16QAM	M+M	Edge_1RB_Right	21.58	PC3	PASS
DC_66A_n5A	15	5+5	DFT-QPSK	M+H	Outer_Full	22.32	PC3	PASS
DC_66A_n5A	15	5+5	DFT-QPSK	M+H	Inner_Full	23.34	PC3	PASS
DC_66A_n5A	15	5+5	DFT-QPSK	M+H	Edge_1RB_Left	22.46	PC3	PASS
DC_66A_n5A	15	5+5	DFT-QPSK	M+H	Edge_1RB_Right	22.42	PC3	PASS
DC_66A_n5A	15	5+5	DFT-16QAM	M+H	Outer_Full	21.44	PC3	PASS

DC_66A_n5A	15	5+5	DFT-16QAM	M+H	Inner_Full	22.26	PC3	PASS
DC_66A_n5A	15	5+5	DFT-16QAM	M+H	Edge_1RB_Left	21.50	PC3	PASS
DC_66A_n5A	15	5+5	DFT-16QAM	M+H	Edge_1RB_Right	20.96	PC3	PASS
DC_66A_n5A	15	5+10	DFT-QPSK	M+L	Outer_Full	22.23	PC3	PASS
DC_66A_n5A	15	5+10	DFT-QPSK	M+L	Inner_Full	23.22	PC3	PASS
DC_66A_n5A	15	5+10	DFT-QPSK	M+L	Edge_1RB_Left	22.32	PC3	PASS
DC_66A_n5A	15	5+10	DFT-QPSK	M+L	Edge_1RB_Right	22.14	PC3	PASS
DC_66A_n5A	15	5+10	DFT-16QAM	M+L	Outer_Full	21.31	PC3	PASS
DC_66A_n5A	15	5+10	DFT-16QAM	M+L	Inner_Full	22.38	PC3	PASS
DC_66A_n5A	15	5+10	DFT-16QAM	M+L	Edge_1RB_Left	21.26	PC3	PASS
DC_66A_n5A	15	5+10	DFT-16QAM	M+L	Edge_1RB_Right	21.19	PC3	PASS
DC_66A_n5A	15	5+10	DFT-QPSK	M+M	Outer_Full	22.31	PC3	PASS
DC_66A_n5A	15	5+10	DFT-QPSK	M+M	Inner_Full	23.18	PC3	PASS
DC_66A_n5A	15	5+10	DFT-QPSK	M+M	Edge_1RB_Left	22.13	PC3	PASS
DC_66A_n5A	15	5+10	DFT-QPSK	M+M	Edge_1RB_Right	22.43	PC3	PASS
DC_66A_n5A	15	5+10	DFT-16QAM	M+M	Outer_Full	21.28	PC3	PASS
DC_66A_n5A	15	5+10	DFT-16QAM	M+M	Inner_Full	22.29	PC3	PASS
DC_66A_n5A	15	5+10	DFT-16QAM	M+M	Edge_1RB_Left	21.14	PC3	PASS
DC_66A_n5A	15	5+10	DFT-16QAM	M+M	Edge_1RB_Right	21.55	PC3	PASS
DC_66A_n5A	15	5+10	DFT-QPSK	M+H	Outer_Full	22.56	PC3	PASS
DC_66A_n5A	15	5+10	DFT-QPSK	M+H	Inner_Full	23.53	PC3	PASS
DC_66A_n5A	15	5+10	DFT-QPSK	M+H	Edge_1RB_Left	22.52	PC3	PASS
DC_66A_n5A	15	5+10	DFT-QPSK	M+H	Edge_1RB_Right	22.41	PC3	PASS
DC_66A_n5A	15	5+10	DFT-16QAM	M+H	Outer_Full	21.55	PC3	PASS
DC_66A_n5A	15	5+10	DFT-16QAM	M+H	Inner_Full	22.58	PC3	PASS
DC_66A_n5A	15	5+10	DFT-16QAM	M+H	Edge_1RB_Left	21.47	PC3	PASS
DC_66A_n5A	15	5+10	DFT-16QAM	M+H	Edge_1RB_Right	20.88	PC3	PASS
DC_66A_n5A	15	5+15	DFT-QPSK	M+L	Outer_Full	22.42	PC3	PASS
DC_66A_n5A	15	5+15	DFT-QPSK	M+L	Inner_Full	23.37	PC3	PASS
DC_66A_n5A	15	5+15	DFT-QPSK	M+L	Edge_1RB_Left	22.46	PC3	PASS
DC_66A_n5A	15	5+15	DFT-QPSK	M+L	Edge_1RB_Right	22.46	PC3	PASS
DC_66A_n5A	15	5+15	DFT-16QAM	M+L	Outer_Full	21.35	PC3	PASS
DC_66A_n5A	15	5+15	DFT-16QAM	M+L	Inner_Full	22.29	PC3	PASS
DC_66A_n5A	15	5+15	DFT-16QAM	M+L	Edge_1RB_Left	21.16	PC3	PASS
DC_66A_n5A	15	5+15	DFT-16QAM	M+L	Edge_1RB_Right	21.56	PC3	PASS
DC_66A_n5A	15	5+15	DFT-QPSK	M+M	Outer_Full	22.44	PC3	PASS
DC_66A_n5A	15	5+15	DFT-QPSK	M+M	Inner_Full	23.45	PC3	PASS
DC_66A_n5A	15	5+15	DFT-QPSK	M+M	Edge_1RB_Left	22.45	PC3	PASS
DC_66A_n5A	15	5+15	DFT-QPSK	M+M	Edge_1RB_Right	22.47	PC3	PASS
DC_66A_n5A	15	5+15	DFT-16QAM	M+M	Outer_Full	21.37	PC3	PASS
DC_66A_n5A	15	5+15	DFT-16QAM	M+M	Inner_Full	22.47	PC3	PASS
DC_66A_n5A	15	5+15	DFT-16QAM	M+M	Edge_1RB_Left	21.29	PC3	PASS

DC_66A_n5A	15	5+15	DFT-16QAM	M+M	Edge_1RB_Right	21.26	PC3	PASS
DC_66A_n5A	15	5+15	DFT-QPSK	M+H	Outer_Full	22.47	PC3	PASS
DC_66A_n5A	15	5+15	DFT-QPSK	M+H	Inner_Full	23.54	PC3	PASS
DC_66A_n5A	15	5+15	DFT-QPSK	M+H	Edge_1RB_Left	22.47	PC3	PASS
DC_66A_n5A	15	5+15	DFT-QPSK	M+H	Edge_1RB_Right	22.45	PC3	PASS
DC_66A_n5A	15	5+15	DFT-16QAM	M+H	Outer_Full	21.61	PC3	PASS
DC_66A_n5A	15	5+15	DFT-16QAM	M+H	Inner_Full	22.52	PC3	PASS
DC_66A_n5A	15	5+15	DFT-16QAM	M+H	Edge_1RB_Left	21.68	PC3	PASS
DC_66A_n5A	15	5+15	DFT-16QAM	M+H	Edge_1RB_Right	21.56	PC3	PASS
DC_66A_n5A	15	5+20	DFT-QPSK	M+L	Outer_Full	22.46	PC3	PASS
DC_66A_n5A	15	5+20	DFT-QPSK	M+L	Inner_Full	23.43	PC3	PASS
DC_66A_n5A	15	5+20	DFT-QPSK	M+L	Edge_1RB_Left	22.47	PC3	PASS
DC_66A_n5A	15	5+20	DFT-QPSK	M+L	Edge_1RB_Right	22.54	PC3	PASS
DC_66A_n5A	15	5+20	DFT-16QAM	M+L	Outer_Full	21.43	PC3	PASS
DC_66A_n5A	15	5+20	DFT-16QAM	M+L	Inner_Full	22.31	PC3	PASS
DC_66A_n5A	15	5+20	DFT-16QAM	M+L	Edge_1RB_Left	21.33	PC3	PASS
DC_66A_n5A	15	5+20	DFT-16QAM	M+L	Edge_1RB_Right	20.94	PC3	PASS
DC_66A_n5A	15	5+20	DFT-QPSK	M+M	Outer_Full	22.39	PC3	PASS
DC_66A_n5A	15	5+20	DFT-QPSK	M+M	Inner_Full	23.42	PC3	PASS
DC_66A_n5A	15	5+20	DFT-QPSK	M+M	Edge_1RB_Left	22.40	PC3	PASS
DC_66A_n5A	15	5+20	DFT-QPSK	M+M	Edge_1RB_Right	22.50	PC3	PASS
DC_66A_n5A	15	5+20	DFT-16QAM	M+M	Outer_Full	21.47	PC3	PASS
DC_66A_n5A	15	5+20	DFT-16QAM	M+M	Inner_Full	22.36	PC3	PASS
DC_66A_n5A	15	5+20	DFT-16QAM	M+M	Edge_1RB_Left	21.36	PC3	PASS
DC_66A_n5A	15	5+20	DFT-16QAM	M+M	Edge_1RB_Right	20.98	PC3	PASS
DC_66A_n5A	15	5+20	DFT-QPSK	M+H	Outer_Full	22.36	PC3	PASS
DC_66A_n5A	15	5+20	DFT-QPSK	M+H	Inner_Full	23.61	PC3	PASS
DC_66A_n5A	15	5+20	DFT-QPSK	M+H	Edge_1RB_Left	22.43	PC3	PASS
DC_66A_n5A	15	5+20	DFT-QPSK	M+H	Edge_1RB_Right	22.32	PC3	PASS
DC_66A_n5A	15	5+20	DFT-16QAM	M+H	Outer_Full	21.40	PC3	PASS
DC_66A_n5A	15	5+20	DFT-16QAM	M+H	Inner_Full	22.43	PC3	PASS
DC_66A_n5A	15	5+20	DFT-16QAM	M+H	Edge_1RB_Left	21.19	PC3	PASS
DC_66A_n5A	15	5+20	DFT-16QAM	M+H	Edge_1RB_Right	21.02	PC3	PASS

5G NR EN_DC(P1):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
DC_4A_n41A	30	5+10	DFT-QPSK	M+L	Outer_Full	24.54	PC2	PASS
DC_4A_n41A	30	5+10	DFT-QPSK	M+L	Inner_Full	25.58	PC2	PASS
DC_4A_n41A	30	5+10	DFT-QPSK	M+L	Edge_1RB_Left	22.31	PC2	PASS
DC_4A_n41A	30	5+10	DFT-QPSK	M+L	Edge_1RB_Right	22.19	PC2	PASS

DC_4A_n41A	30	5+10	DFT-16QAM	M+L	Outer_Full	23.63	PC2	PASS
DC_4A_n41A	30	5+10	DFT-16QAM	M+L	Inner_Full	24.59	PC2	PASS
DC_4A_n41A	30	5+10	DFT-16QAM	M+L	Edge_1RB_Left	22.33	PC2	PASS
DC_4A_n41A	30	5+10	DFT-16QAM	M+L	Edge_1RB_Right	22.39	PC2	PASS
DC_4A_n41A	30	5+10	DFT-QPSK	M+M	Outer_Full	24.41	PC2	PASS
DC_4A_n41A	30	5+10	DFT-QPSK	M+M	Inner_Full	25.33	PC2	PASS
DC_4A_n41A	30	5+10	DFT-QPSK	M+M	Edge_1RB_Left	21.83	PC2	PASS
DC_4A_n41A	30	5+10	DFT-QPSK	M+M	Edge_1RB_Right	22.22	PC2	PASS
DC_4A_n41A	30	5+10	DFT-16QAM	M+M	Outer_Full	23.41	PC2	PASS
DC_4A_n41A	30	5+10	DFT-16QAM	M+M	Inner_Full	24.34	PC2	PASS
DC_4A_n41A	30	5+10	DFT-16QAM	M+M	Edge_1RB_Left	21.92	PC2	PASS
DC_4A_n41A	30	5+10	DFT-16QAM	M+M	Edge_1RB_Right	22.27	PC2	PASS
DC_4A_n41A	30	5+10	DFT-QPSK	M+H	Outer_Full	24.74	PC2	PASS
DC_4A_n41A	30	5+10	DFT-QPSK	M+H	Inner_Full	25.81	PC2	PASS
DC_4A_n41A	30	5+10	DFT-QPSK	M+H	Edge_1RB_Left	22.20	PC2	PASS
DC_4A_n41A	30	5+10	DFT-QPSK	M+H	Edge_1RB_Right	22.49	PC2	PASS
DC_4A_n41A	30	5+10	DFT-16QAM	M+H	Outer_Full	23.82	PC2	PASS
DC_4A_n41A	30	5+10	DFT-16QAM	M+H	Inner_Full	24.81	PC2	PASS
DC_4A_n41A	30	5+10	DFT-16QAM	M+H	Edge_1RB_Left	22.37	PC2	PASS
DC_4A_n41A	30	5+10	DFT-16QAM	M+H	Edge_1RB_Right	22.56	PC2	PASS
DC_4A_n41A	30	5+15	DFT-QPSK	M+L	Outer_Full	24.63	PC2	PASS
DC_4A_n41A	30	5+15	DFT-QPSK	M+L	Inner_Full	25.52	PC2	PASS
DC_4A_n41A	30	5+15	DFT-QPSK	M+L	Edge_1RB_Left	22.05	PC2	PASS
DC_4A_n41A	30	5+15	DFT-QPSK	M+L	Edge_1RB_Right	21.79	PC2	PASS
DC_4A_n41A	30	5+15	DFT-16QAM	M+L	Outer_Full	23.50	PC2	PASS
DC_4A_n41A	30	5+15	DFT-16QAM	M+L	Inner_Full	24.68	PC2	PASS
DC_4A_n41A	30	5+15	DFT-16QAM	M+L	Edge_1RB_Left	22.33	PC2	PASS
DC_4A_n41A	30	5+15	DFT-16QAM	M+L	Edge_1RB_Right	21.77	PC2	PASS
DC_4A_n41A	30	5+15	DFT-QPSK	M+M	Outer_Full	24.39	PC2	PASS
DC_4A_n41A	30	5+15	DFT-QPSK	M+M	Inner_Full	25.31	PC2	PASS
DC_4A_n41A	30	5+15	DFT-QPSK	M+M	Edge_1RB_Left	21.70	PC2	PASS
DC_4A_n41A	30	5+15	DFT-QPSK	M+M	Edge_1RB_Right	22.24	PC2	PASS
DC_4A_n41A	30	5+15	DFT-16QAM	M+M	Outer_Full	23.37	PC2	PASS
DC_4A_n41A	30	5+15	DFT-16QAM	M+M	Inner_Full	24.38	PC2	PASS
DC_4A_n41A	30	5+15	DFT-16QAM	M+M	Edge_1RB_Left	21.67	PC2	PASS
DC_4A_n41A	30	5+15	DFT-16QAM	M+M	Edge_1RB_Right	22.11	PC2	PASS
DC_4A_n41A	30	5+15	DFT-QPSK	M+H	Outer_Full	24.79	PC2	PASS
DC_4A_n41A	30	5+15	DFT-QPSK	M+H	Inner_Full	25.68	PC2	PASS
DC_4A_n41A	30	5+15	DFT-QPSK	M+H	Edge_1RB_Left	22.24	PC2	PASS
DC_4A_n41A	30	5+15	DFT-QPSK	M+H	Edge_1RB_Right	22.39	PC2	PASS
DC_4A_n41A	30	5+15	DFT-16QAM	M+H	Outer_Full	23.66	PC2	PASS
DC_4A_n41A	30	5+15	DFT-16QAM	M+H	Inner_Full	24.82	PC2	PASS

DC_4A_n41A	30	5+15	DFT-16QAM	M+H	Edge_1RB_Left	22.29	PC2	PASS
DC_4A_n41A	30	5+15	DFT-16QAM	M+H	Edge_1RB_Right	22.29	PC2	PASS
DC_4A_n41A	30	5+20	DFT-QPSK	M+L	Outer_Full	24.43	PC2	PASS
DC_4A_n41A	30	5+20	DFT-QPSK	M+L	Inner_Full	25.48	PC2	PASS
DC_4A_n41A	30	5+20	DFT-QPSK	M+L	Edge_1RB_Left	22.23	PC2	PASS
DC_4A_n41A	30	5+20	DFT-QPSK	M+L	Edge_1RB_Right	21.75	PC2	PASS
DC_4A_n41A	30	5+20	DFT-16QAM	M+L	Outer_Full	23.40	PC2	PASS
DC_4A_n41A	30	5+20	DFT-16QAM	M+L	Inner_Full	24.63	PC2	PASS
DC_4A_n41A	30	5+20	DFT-16QAM	M+L	Edge_1RB_Left	22.20	PC2	PASS
DC_4A_n41A	30	5+20	DFT-16QAM	M+L	Edge_1RB_Right	21.56	PC2	PASS
DC_4A_n41A	30	5+20	DFT-QPSK	M+M	Outer_Full	24.36	PC2	PASS
DC_4A_n41A	30	5+20	DFT-QPSK	M+M	Inner_Full	25.34	PC2	PASS
DC_4A_n41A	30	5+20	DFT-QPSK	M+M	Edge_1RB_Left	21.61	PC2	PASS
DC_4A_n41A	30	5+20	DFT-QPSK	M+M	Edge_1RB_Right	22.32	PC2	PASS
DC_4A_n41A	30	5+20	DFT-16QAM	M+M	Outer_Full	23.36	PC2	PASS
DC_4A_n41A	30	5+20	DFT-16QAM	M+M	Inner_Full	24.42	PC2	PASS
DC_4A_n41A	30	5+20	DFT-16QAM	M+M	Edge_1RB_Left	21.76	PC2	PASS
DC_4A_n41A	30	5+20	DFT-16QAM	M+M	Edge_1RB_Right	22.14	PC2	PASS
DC_4A_n41A	30	5+20	DFT-QPSK	M+H	Outer_Full	24.67	PC2	PASS
DC_4A_n41A	30	5+20	DFT-QPSK	M+H	Inner_Full	25.80	PC2	PASS
DC_4A_n41A	30	5+20	DFT-QPSK	M+H	Edge_1RB_Left	22.36	PC2	PASS
DC_4A_n41A	30	5+20	DFT-QPSK	M+H	Edge_1RB_Right	22.29	PC2	PASS
DC_4A_n41A	30	5+20	DFT-16QAM	M+H	Outer_Full	23.74	PC2	PASS
DC_4A_n41A	30	5+20	DFT-16QAM	M+H	Inner_Full	24.74	PC2	PASS
DC_4A_n41A	30	5+20	DFT-16QAM	M+H	Edge_1RB_Left	22.32	PC2	PASS
DC_4A_n41A	30	5+20	DFT-16QAM	M+H	Edge_1RB_Right	22.30	PC2	PASS
DC_4A_n41A	30	5+30	DFT-QPSK	M+L	Outer_Full	24.48	PC2	PASS
DC_4A_n41A	30	5+30	DFT-QPSK	M+L	Inner_Full	25.40	PC2	PASS
DC_4A_n41A	30	5+30	DFT-QPSK	M+L	Edge_1RB_Left	22.23	PC2	PASS
DC_4A_n41A	30	5+30	DFT-QPSK	M+L	Edge_1RB_Right	21.93	PC2	PASS
DC_4A_n41A	30	5+30	DFT-16QAM	M+L	Outer_Full	23.38	PC2	PASS
DC_4A_n41A	30	5+30	DFT-16QAM	M+L	Inner_Full	24.32	PC2	PASS
DC_4A_n41A	30	5+30	DFT-16QAM	M+L	Edge_1RB_Left	22.09	PC2	PASS
DC_4A_n41A	30	5+30	DFT-16QAM	M+L	Edge_1RB_Right	22.09	PC2	PASS
DC_4A_n41A	30	5+30	DFT-QPSK	M+M	Outer_Full	24.42	PC2	PASS
DC_4A_n41A	30	5+30	DFT-QPSK	M+M	Inner_Full	25.43	PC2	PASS
DC_4A_n41A	30	5+30	DFT-QPSK	M+M	Edge_1RB_Left	21.72	PC2	PASS
DC_4A_n41A	30	5+30	DFT-QPSK	M+M	Edge_1RB_Right	22.09	PC2	PASS
DC_4A_n41A	30	5+30	DFT-16QAM	M+M	Outer_Full	23.41	PC2	PASS
DC_4A_n41A	30	5+30	DFT-16QAM	M+M	Inner_Full	24.41	PC2	PASS
DC_4A_n41A	30	5+30	DFT-16QAM	M+M	Edge_1RB_Left	21.64	PC2	PASS
DC_4A_n41A	30	5+30	DFT-16QAM	M+M	Edge_1RB_Right	22.15	PC2	PASS

DC_4A_n41A	30	5+30	DFT-QPSK	M+H	Outer_Full	24.75	PC2	PASS
DC_4A_n41A	30	5+30	DFT-QPSK	M+H	Inner_Full	25.83	PC2	PASS
DC_4A_n41A	30	5+30	DFT-QPSK	M+H	Edge_1RB_Left	22.09	PC2	PASS
DC_4A_n41A	30	5+30	DFT-QPSK	M+H	Edge_1RB_Right	22.30	PC2	PASS
DC_4A_n41A	30	5+30	DFT-16QAM	M+H	Outer_Full	23.73	PC2	PASS
DC_4A_n41A	30	5+30	DFT-16QAM	M+H	Inner_Full	24.84	PC2	PASS
DC_4A_n41A	30	5+30	DFT-16QAM	M+H	Edge_1RB_Left	22.23	PC2	PASS
DC_4A_n41A	30	5+30	DFT-16QAM	M+H	Edge_1RB_Right	22.25	PC2	PASS
DC_4A_n41A	30	5+40	DFT-QPSK	M+L	Outer_Full	24.42	PC2	PASS
DC_4A_n41A	30	5+40	DFT-QPSK	M+L	Inner_Full	25.29	PC2	PASS
DC_4A_n41A	30	5+40	DFT-QPSK	M+L	Edge_1RB_Left	21.99	PC2	PASS
DC_4A_n41A	30	5+40	DFT-QPSK	M+L	Edge_1RB_Right	22.08	PC2	PASS
DC_4A_n41A	30	5+40	DFT-16QAM	M+L	Outer_Full	23.37	PC2	PASS
DC_4A_n41A	30	5+40	DFT-16QAM	M+L	Inner_Full	24.32	PC2	PASS
DC_4A_n41A	30	5+40	DFT-16QAM	M+L	Edge_1RB_Left	22.15	PC2	PASS
DC_4A_n41A	30	5+40	DFT-16QAM	M+L	Edge_1RB_Right	22.21	PC2	PASS
DC_4A_n41A	30	5+40	DFT-QPSK	M+M	Outer_Full	24.45	PC2	PASS
DC_4A_n41A	30	5+40	DFT-QPSK	M+M	Inner_Full	25.45	PC2	PASS
DC_4A_n41A	30	5+40	DFT-QPSK	M+M	Edge_1RB_Left	21.97	PC2	PASS
DC_4A_n41A	30	5+40	DFT-QPSK	M+M	Edge_1RB_Right	21.78	PC2	PASS
DC_4A_n41A	30	5+40	DFT-16QAM	M+M	Outer_Full	23.39	PC2	PASS
DC_4A_n41A	30	5+40	DFT-16QAM	M+M	Inner_Full	24.49	PC2	PASS
DC_4A_n41A	30	5+40	DFT-16QAM	M+M	Edge_1RB_Left	21.85	PC2	PASS
DC_4A_n41A	30	5+40	DFT-16QAM	M+M	Edge_1RB_Right	21.92	PC2	PASS
DC_4A_n41A	30	5+40	DFT-QPSK	M+H	Outer_Full	24.72	PC2	PASS
DC_4A_n41A	30	5+40	DFT-QPSK	M+H	Inner_Full	25.77	PC2	PASS
DC_4A_n41A	30	5+40	DFT-QPSK	M+H	Edge_1RB_Left	21.83	PC2	PASS
DC_4A_n41A	30	5+40	DFT-QPSK	M+H	Edge_1RB_Right	22.40	PC2	PASS
DC_4A_n41A	30	5+40	DFT-16QAM	M+H	Outer_Full	23.69	PC2	PASS
DC_4A_n41A	30	5+40	DFT-16QAM	M+H	Inner_Full	24.83	PC2	PASS
DC_4A_n41A	30	5+40	DFT-16QAM	M+H	Edge_1RB_Left	21.91	PC2	PASS
DC_4A_n41A	30	5+40	DFT-16QAM	M+H	Edge_1RB_Right	22.33	PC2	PASS
DC_4A_n41A	30	5+60	DFT-QPSK	M+L	Outer_Full	24.29	PC2	PASS
DC_4A_n41A	30	5+60	DFT-QPSK	M+L	Inner_Full	25.36	PC2	PASS
DC_4A_n41A	30	5+60	DFT-QPSK	M+L	Edge_1RB_Left	21.88	PC2	PASS
DC_4A_n41A	30	5+60	DFT-QPSK	M+L	Edge_1RB_Right	21.54	PC2	PASS
DC_4A_n41A	30	5+60	DFT-16QAM	M+L	Outer_Full	23.37	PC2	PASS
DC_4A_n41A	30	5+60	DFT-16QAM	M+L	Inner_Full	24.30	PC2	PASS
DC_4A_n41A	30	5+60	DFT-16QAM	M+L	Edge_1RB_Left	22.03	PC2	PASS
DC_4A_n41A	30	5+60	DFT-16QAM	M+L	Edge_1RB_Right	21.67	PC2	PASS
DC_4A_n41A	30	5+60	DFT-QPSK	M+M	Outer_Full	24.27	PC2	PASS
DC_4A_n41A	30	5+60	DFT-QPSK	M+M	Inner_Full	25.37	PC2	PASS

DC_4A_n41A	30	5+60	DFT-QPSK	M+M	Edge_1RB_Left	21.96	PC2	PASS
DC_4A_n41A	30	5+60	DFT-QPSK	M+M	Edge_1RB_Right	21.60	PC2	PASS
DC_4A_n41A	30	5+60	DFT-16QAM	M+M	Outer_Full	23.27	PC2	PASS
DC_4A_n41A	30	5+60	DFT-16QAM	M+M	Inner_Full	24.38	PC2	PASS
DC_4A_n41A	30	5+60	DFT-16QAM	M+M	Edge_1RB_Left	21.87	PC2	PASS
DC_4A_n41A	30	5+60	DFT-16QAM	M+M	Edge_1RB_Right	21.72	PC2	PASS
DC_4A_n41A	30	5+60	DFT-QPSK	M+H	Outer_Full	24.70	PC2	PASS
DC_4A_n41A	30	5+60	DFT-QPSK	M+H	Inner_Full	25.60	PC2	PASS
DC_4A_n41A	30	5+60	DFT-QPSK	M+H	Edge_1RB_Left	21.98	PC2	PASS
DC_4A_n41A	30	5+60	DFT-QPSK	M+H	Edge_1RB_Right	22.17	PC2	PASS
DC_4A_n41A	30	5+60	DFT-16QAM	M+H	Outer_Full	23.52	PC2	PASS
DC_4A_n41A	30	5+60	DFT-16QAM	M+H	Inner_Full	24.51	PC2	PASS
DC_4A_n41A	30	5+60	DFT-16QAM	M+H	Edge_1RB_Left	22.02	PC2	PASS
DC_4A_n41A	30	5+60	DFT-16QAM	M+H	Edge_1RB_Right	22.34	PC2	PASS
DC_4A_n41A	30	5+80	DFT-QPSK	M+L	Outer_Full	24.42	PC2	PASS
DC_4A_n41A	30	5+80	DFT-QPSK	M+L	Inner_Full	25.44	PC2	PASS
DC_4A_n41A	30	5+80	DFT-QPSK	M+L	Edge_1RB_Left	22.42	PC2	PASS
DC_4A_n41A	30	5+80	DFT-QPSK	M+L	Edge_1RB_Right	22.00	PC2	PASS
DC_4A_n41A	30	5+80	DFT-16QAM	M+L	Outer_Full	23.44	PC2	PASS
DC_4A_n41A	30	5+80	DFT-16QAM	M+L	Inner_Full	24.41	PC2	PASS
DC_4A_n41A	30	5+80	DFT-16QAM	M+L	Edge_1RB_Left	22.40	PC2	PASS
DC_4A_n41A	30	5+80	DFT-16QAM	M+L	Edge_1RB_Right	21.88	PC2	PASS
DC_4A_n41A	30	5+80	DFT-QPSK	M+M	Outer_Full	24.45	PC2	PASS
DC_4A_n41A	30	5+80	DFT-QPSK	M+M	Inner_Full	25.53	PC2	PASS
DC_4A_n41A	30	5+80	DFT-QPSK	M+M	Edge_1RB_Left	21.78	PC2	PASS
DC_4A_n41A	30	5+80	DFT-QPSK	M+M	Edge_1RB_Right	22.17	PC2	PASS
DC_4A_n41A	30	5+80	DFT-16QAM	M+M	Outer_Full	23.41	PC2	PASS
DC_4A_n41A	30	5+80	DFT-16QAM	M+M	Inner_Full	24.49	PC2	PASS
DC_4A_n41A	30	5+80	DFT-16QAM	M+M	Edge_1RB_Left	21.88	PC2	PASS
DC_4A_n41A	30	5+80	DFT-16QAM	M+M	Edge_1RB_Right	22.07	PC2	PASS
DC_4A_n41A	30	5+80	DFT-QPSK	M+H	Outer_Full	24.64	PC2	PASS
DC_4A_n41A	30	5+80	DFT-QPSK	M+H	Inner_Full	25.80	PC2	PASS
DC_4A_n41A	30	5+80	DFT-QPSK	M+H	Edge_1RB_Left	22.09	PC2	PASS
DC_4A_n41A	30	5+80	DFT-QPSK	M+H	Edge_1RB_Right	22.44	PC2	PASS
DC_4A_n41A	30	5+80	DFT-16QAM	M+H	Outer_Full	23.62	PC2	PASS
DC_4A_n41A	30	5+80	DFT-16QAM	M+H	Inner_Full	24.62	PC2	PASS
DC_4A_n41A	30	5+80	DFT-16QAM	M+H	Edge_1RB_Left	22.10	PC2	PASS
DC_4A_n41A	30	5+80	DFT-16QAM	M+H	Edge_1RB_Right	22.28	PC2	PASS
DC_4A_n41A	30	5+90	DFT-QPSK	M+L	Outer_Full	24.49	PC2	PASS
DC_4A_n41A	30	5+90	DFT-QPSK	M+L	Inner_Full	25.49	PC2	PASS
DC_4A_n41A	30	5+90	DFT-QPSK	M+L	Edge_1RB_Left	22.14	PC2	PASS
DC_4A_n41A	30	5+90	DFT-QPSK	M+L	Edge_1RB_Right	21.67	PC2	PASS

DC_4A_n41A	30	5+90	DFT-16QAM	M+L	Outer_Full	23.41	PC2	PASS
DC_4A_n41A	30	5+90	DFT-16QAM	M+L	Inner_Full	24.43	PC2	PASS
DC_4A_n41A	30	5+90	DFT-16QAM	M+L	Edge_1RB_Left	22.07	PC2	PASS
DC_4A_n41A	30	5+90	DFT-16QAM	M+L	Edge_1RB_Right	21.57	PC2	PASS
DC_4A_n41A	30	5+90	DFT-QPSK	M+M	Outer_Full	24.48	PC2	PASS
DC_4A_n41A	30	5+90	DFT-QPSK	M+M	Inner_Full	25.53	PC2	PASS
DC_4A_n41A	30	5+90	DFT-QPSK	M+M	Edge_1RB_Left	21.63	PC2	PASS
DC_4A_n41A	30	5+90	DFT-QPSK	M+M	Edge_1RB_Right	22.09	PC2	PASS
DC_4A_n41A	30	5+90	DFT-16QAM	M+M	Outer_Full	23.43	PC2	PASS
DC_4A_n41A	30	5+90	DFT-16QAM	M+M	Inner_Full	24.45	PC2	PASS
DC_4A_n41A	30	5+90	DFT-16QAM	M+M	Edge_1RB_Left	21.77	PC2	PASS
DC_4A_n41A	30	5+90	DFT-16QAM	M+M	Edge_1RB_Right	22.30	PC2	PASS
DC_4A_n41A	30	5+90	DFT-QPSK	M+H	Outer_Full	24.67	PC2	PASS
DC_4A_n41A	30	5+90	DFT-QPSK	M+H	Inner_Full	25.69	PC2	PASS
DC_4A_n41A	30	5+90	DFT-QPSK	M+H	Edge_1RB_Left	22.32	PC2	PASS
DC_4A_n41A	30	5+90	DFT-QPSK	M+H	Edge_1RB_Right	22.30	PC2	PASS
DC_4A_n41A	30	5+90	DFT-16QAM	M+H	Outer_Full	23.62	PC2	PASS
DC_4A_n41A	30	5+90	DFT-16QAM	M+H	Inner_Full	24.57	PC2	PASS
DC_4A_n41A	30	5+90	DFT-16QAM	M+H	Edge_1RB_Left	22.39	PC2	PASS
DC_4A_n41A	30	5+90	DFT-16QAM	M+H	Edge_1RB_Right	22.21	PC2	PASS
DC_4A_n41A	30	5+100	DFT-QPSK	M+L	Outer_Full	24.43	PC2	PASS
DC_4A_n41A	30	5+100	DFT-QPSK	M+L	Inner_Full	25.46	PC2	PASS
DC_4A_n41A	30	5+100	DFT-QPSK	M+L	Edge_1RB_Left	21.95	PC2	PASS
DC_4A_n41A	30	5+100	DFT-QPSK	M+L	Edge_1RB_Right	21.92	PC2	PASS
DC_4A_n41A	30	5+100	DFT-16QAM	M+L	Outer_Full	23.37	PC2	PASS
DC_4A_n41A	30	5+100	DFT-16QAM	M+L	Inner_Full	24.41	PC2	PASS
DC_4A_n41A	30	5+100	DFT-16QAM	M+L	Edge_1RB_Left	21.93	PC2	PASS
DC_4A_n41A	30	5+100	DFT-16QAM	M+L	Edge_1RB_Right	22.03	PC2	PASS
DC_4A_n41A	30	5+100	DFT-QPSK	M+M	Outer_Full	24.44	PC2	PASS
DC_4A_n41A	30	5+100	DFT-QPSK	M+M	Inner_Full	25.49	PC2	PASS
DC_4A_n41A	30	5+100	DFT-QPSK	M+M	Edge_1RB_Left	21.65	PC2	PASS
DC_4A_n41A	30	5+100	DFT-QPSK	M+M	Edge_1RB_Right	21.95	PC2	PASS
DC_4A_n41A	30	5+100	DFT-16QAM	M+M	Outer_Full	23.44	PC2	PASS
DC_4A_n41A	30	5+100	DFT-16QAM	M+M	Inner_Full	24.45	PC2	PASS
DC_4A_n41A	30	5+100	DFT-16QAM	M+M	Edge_1RB_Left	21.51	PC2	PASS
DC_4A_n41A	30	5+100	DFT-16QAM	M+M	Edge_1RB_Right	21.99	PC2	PASS
DC_4A_n41A	30	5+100	DFT-QPSK	M+H	Outer_Full	23.94	PC2	PASS
DC_4A_n41A	30	5+100	DFT-QPSK	M+H	Inner_Full	25.86	PC2	PASS
DC_4A_n41A	30	5+100	DFT-QPSK	M+H	Edge_1RB_Left	21.77	PC2	PASS
DC_4A_n41A	30	5+100	DFT-QPSK	M+H	Edge_1RB_Right	22.19	PC2	PASS
DC_4A_n41A	30	5+100	DFT-16QAM	M+H	Outer_Full	23.60	PC2	PASS
DC_4A_n41A	30	5+100	DFT-16QAM	M+H	Inner_Full	24.53	PC2	PASS

DC_4A_n41A	30	5+100	DFT-16QAM	M+H	Edge_1RB_Left	21.87	PC2	PASS
DC_4A_n41A	30	5+100	DFT-16QAM	M+H	Edge_1RB_Right	22.03	PC2	PASS

5G NR EN_DC(P1):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
DC_5A_n66A	15	5+5	DFT-QPSK	M+L	Outer_Full	22.57	PC3	PASS
DC_5A_n66A	15	5+5	DFT-QPSK	M+L	Inner_Full	23.48	PC3	PASS
DC_5A_n66A	15	5+5	DFT-QPSK	M+L	Edge_1RB_Left	22.54	PC3	PASS
DC_5A_n66A	15	5+5	DFT-QPSK	M+L	Edge_1RB_Right	22.93	PC3	PASS
DC_5A_n66A	15	5+5	DFT-16QAM	M+L	Outer_Full	21.58	PC3	PASS
DC_5A_n66A	15	5+5	DFT-16QAM	M+L	Inner_Full	22.83	PC3	PASS
DC_5A_n66A	15	5+5	DFT-16QAM	M+L	Edge_1RB_Left	21.77	PC3	PASS
DC_5A_n66A	15	5+5	DFT-16QAM	M+L	Edge_1RB_Right	21.94	PC3	PASS
DC_5A_n66A	15	5+5	DFT-QPSK	M+M	Outer_Full	22.64	PC3	PASS
DC_5A_n66A	15	5+5	DFT-QPSK	M+M	Inner_Full	23.42	PC3	PASS
DC_5A_n66A	15	5+5	DFT-QPSK	M+M	Edge_1RB_Left	22.48	PC3	PASS
DC_5A_n66A	15	5+5	DFT-QPSK	M+M	Edge_1RB_Right	22.54	PC3	PASS
DC_5A_n66A	15	5+5	DFT-16QAM	M+M	Outer_Full	21.44	PC3	PASS
DC_5A_n66A	15	5+5	DFT-16QAM	M+M	Inner_Full	22.42	PC3	PASS
DC_5A_n66A	15	5+5	DFT-16QAM	M+M	Edge_1RB_Left	21.59	PC3	PASS
DC_5A_n66A	15	5+5	DFT-16QAM	M+M	Edge_1RB_Right	21.82	PC3	PASS
DC_5A_n66A	15	5+5	DFT-QPSK	M+H	Outer_Full	22.00	PC3	PASS
DC_5A_n66A	15	5+5	DFT-QPSK	M+H	Inner_Full	22.69	PC3	PASS
DC_5A_n66A	15	5+5	DFT-QPSK	M+H	Edge_1RB_Left	21.80	PC3	PASS
DC_5A_n66A	15	5+5	DFT-QPSK	M+H	Edge_1RB_Right	21.89	PC3	PASS
DC_5A_n66A	15	5+5	DFT-16QAM	M+H	Outer_Full	20.76	PC3	PASS
DC_5A_n66A	15	5+5	DFT-16QAM	M+H	Inner_Full	21.99	PC3	PASS
DC_5A_n66A	15	5+5	DFT-16QAM	M+H	Edge_1RB_Left	20.66	PC3	PASS
DC_5A_n66A	15	5+5	DFT-16QAM	M+H	Edge_1RB_Right	20.66	PC3	PASS
DC_5A_n66A	15	5+10	DFT-QPSK	M+L	Outer_Full	22.60	PC3	PASS
DC_5A_n66A	15	5+10	DFT-QPSK	M+L	Inner_Full	23.80	PC3	PASS
DC_5A_n66A	15	5+10	DFT-QPSK	M+L	Edge_1RB_Left	22.58	PC3	PASS
DC_5A_n66A	15	5+10	DFT-QPSK	M+L	Edge_1RB_Right	22.84	PC3	PASS
DC_5A_n66A	15	5+10	DFT-16QAM	M+L	Outer_Full	21.65	PC3	PASS
DC_5A_n66A	15	5+10	DFT-16QAM	M+L	Inner_Full	22.59	PC3	PASS
DC_5A_n66A	15	5+10	DFT-16QAM	M+L	Edge_1RB_Left	21.33	PC3	PASS
DC_5A_n66A	15	5+10	DFT-16QAM	M+L	Edge_1RB_Right	22.05	PC3	PASS
DC_5A_n66A	15	5+10	DFT-QPSK	M+M	Outer_Full	22.63	PC3	PASS
DC_5A_n66A	15	5+10	DFT-QPSK	M+M	Inner_Full	23.64	PC3	PASS
DC_5A_n66A	15	5+10	DFT-QPSK	M+M	Edge_1RB_Left	22.35	PC3	PASS

DC_5A_n66A	15	5+10	DFT-QPSK	M+M	Edge_1RB_Right	22.86	PC3	PASS
DC_5A_n66A	15	5+10	DFT-16QAM	M+M	Outer_Full	21.42	PC3	PASS
DC_5A_n66A	15	5+10	DFT-16QAM	M+M	Inner_Full	22.63	PC3	PASS
DC_5A_n66A	15	5+10	DFT-16QAM	M+M	Edge_1RB_Left	21.62	PC3	PASS
DC_5A_n66A	15	5+10	DFT-16QAM	M+M	Edge_1RB_Right	21.83	PC3	PASS
DC_5A_n66A	15	5+10	DFT-QPSK	M+H	Outer_Full	21.70	PC3	PASS
DC_5A_n66A	15	5+10	DFT-QPSK	M+H	Inner_Full	22.66	PC3	PASS
DC_5A_n66A	15	5+10	DFT-QPSK	M+H	Edge_1RB_Left	21.68	PC3	PASS
DC_5A_n66A	15	5+10	DFT-QPSK	M+H	Edge_1RB_Right	21.93	PC3	PASS
DC_5A_n66A	15	5+10	DFT-16QAM	M+H	Outer_Full	20.70	PC3	PASS
DC_5A_n66A	15	5+10	DFT-16QAM	M+H	Inner_Full	21.71	PC3	PASS
DC_5A_n66A	15	5+10	DFT-16QAM	M+H	Edge_1RB_Left	20.94	PC3	PASS
DC_5A_n66A	15	5+10	DFT-16QAM	M+H	Edge_1RB_Right	21.15	PC3	PASS
DC_5A_n66A	15	5+15	DFT-QPSK	M+L	Outer_Full	22.63	PC3	PASS
DC_5A_n66A	15	5+15	DFT-QPSK	M+L	Inner_Full	23.58	PC3	PASS
DC_5A_n66A	15	5+15	DFT-QPSK	M+L	Edge_1RB_Left	22.53	PC3	PASS
DC_5A_n66A	15	5+15	DFT-QPSK	M+L	Edge_1RB_Right	22.82	PC3	PASS
DC_5A_n66A	15	5+15	DFT-16QAM	M+L	Outer_Full	21.69	PC3	PASS
DC_5A_n66A	15	5+15	DFT-16QAM	M+L	Inner_Full	22.99	PC3	PASS
DC_5A_n66A	15	5+15	DFT-16QAM	M+L	Edge_1RB_Left	21.68	PC3	PASS
DC_5A_n66A	15	5+15	DFT-16QAM	M+L	Edge_1RB_Right	21.39	PC3	PASS
DC_5A_n66A	15	5+15	DFT-QPSK	M+M	Outer_Full	22.40	PC3	PASS
DC_5A_n66A	15	5+15	DFT-QPSK	M+M	Inner_Full	23.36	PC3	PASS
DC_5A_n66A	15	5+15	DFT-QPSK	M+M	Edge_1RB_Left	22.38	PC3	PASS
DC_5A_n66A	15	5+15	DFT-QPSK	M+M	Edge_1RB_Right	22.82	PC3	PASS
DC_5A_n66A	15	5+15	DFT-16QAM	M+M	Outer_Full	21.42	PC3	PASS
DC_5A_n66A	15	5+15	DFT-16QAM	M+M	Inner_Full	22.45	PC3	PASS
DC_5A_n66A	15	5+15	DFT-16QAM	M+M	Edge_1RB_Left	21.09	PC3	PASS
DC_5A_n66A	15	5+15	DFT-16QAM	M+M	Edge_1RB_Right	21.34	PC3	PASS
DC_5A_n66A	15	5+15	DFT-QPSK	M+H	Outer_Full	21.94	PC3	PASS
DC_5A_n66A	15	5+15	DFT-QPSK	M+H	Inner_Full	22.62	PC3	PASS
DC_5A_n66A	15	5+15	DFT-QPSK	M+H	Edge_1RB_Left	21.84	PC3	PASS
DC_5A_n66A	15	5+15	DFT-QPSK	M+H	Edge_1RB_Right	21.89	PC3	PASS
DC_5A_n66A	15	5+15	DFT-16QAM	M+H	Outer_Full	20.71	PC3	PASS
DC_5A_n66A	15	5+15	DFT-16QAM	M+H	Inner_Full	21.92	PC3	PASS
DC_5A_n66A	15	5+15	DFT-16QAM	M+H	Edge_1RB_Left	21.07	PC3	PASS
DC_5A_n66A	15	5+15	DFT-16QAM	M+H	Edge_1RB_Right	21.14	PC3	PASS
DC_5A_n66A	15	5+20	DFT-QPSK	M+L	Outer_Full	22.59	PC3	PASS
DC_5A_n66A	15	5+20	DFT-QPSK	M+L	Inner_Full	23.88	PC3	PASS
DC_5A_n66A	15	5+20	DFT-QPSK	M+L	Edge_1RB_Left	22.54	PC3	PASS
DC_5A_n66A	15	5+20	DFT-QPSK	M+L	Edge_1RB_Right	22.48	PC3	PASS
DC_5A_n66A	15	5+20	DFT-16QAM	M+L	Outer_Full	21.57	PC3	PASS

DC_5A_n66A	15	5+20	DFT-16QAM	M+L	Inner_Full	22.59	PC3	PASS
DC_5A_n66A	15	5+20	DFT-16QAM	M+L	Edge_1RB_Left	21.25	PC3	PASS
DC_5A_n66A	15	5+20	DFT-16QAM	M+L	Edge_1RB_Right	21.86	PC3	PASS
DC_5A_n66A	15	5+20	DFT-QPSK	M+M	Outer_Full	22.39	PC3	PASS
DC_5A_n66A	15	5+20	DFT-QPSK	M+M	Inner_Full	23.41	PC3	PASS
DC_5A_n66A	15	5+20	DFT-QPSK	M+M	Edge_1RB_Left	22.56	PC3	PASS
DC_5A_n66A	15	5+20	DFT-QPSK	M+M	Edge_1RB_Right	22.56	PC3	PASS
DC_5A_n66A	15	5+20	DFT-16QAM	M+M	Outer_Full	21.40	PC3	PASS
DC_5A_n66A	15	5+20	DFT-16QAM	M+M	Inner_Full	22.42	PC3	PASS
DC_5A_n66A	15	5+20	DFT-16QAM	M+M	Edge_1RB_Left	21.27	PC3	PASS
DC_5A_n66A	15	5+20	DFT-16QAM	M+M	Edge_1RB_Right	21.40	PC3	PASS
DC_5A_n66A	15	5+20	DFT-QPSK	M+H	Outer_Full	21.76	PC3	PASS
DC_5A_n66A	15	5+20	DFT-QPSK	M+H	Inner_Full	22.69	PC3	PASS
DC_5A_n66A	15	5+20	DFT-QPSK	M+H	Edge_1RB_Left	22.20	PC3	PASS
DC_5A_n66A	15	5+20	DFT-QPSK	M+H	Edge_1RB_Right	21.93	PC3	PASS
DC_5A_n66A	15	5+20	DFT-16QAM	M+H	Outer_Full	20.94	PC3	PASS
DC_5A_n66A	15	5+20	DFT-16QAM	M+H	Inner_Full	21.66	PC3	PASS
DC_5A_n66A	15	5+20	DFT-16QAM	M+H	Edge_1RB_Left	21.42	PC3	PASS
DC_5A_n66A	15	5+20	DFT-16QAM	M+H	Edge_1RB_Right	21.16	PC3	PASS

5G NR EN_DC (P1): DC_2A_N77_3450-3550MHz

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+L	Outer_Full	25.00	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+L	Inner_Full	25.93	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+L	Edge_1RB_Left	22.55	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+L	Edge_1RB_Right	22.61	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+L	Outer_Full	23.98	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+L	Inner_Full	24.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+L	Edge_1RB_Left	22.64	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+L	Edge_1RB_Right	22.74	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+M	Outer_Full	25.40	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+M	Inner_Full	26.60	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+M	Edge_1RB_Left	23.12	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+M	Edge_1RB_Right	23.09	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+M	Outer_Full	24.60	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+M	Inner_Full	25.42	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+M	Edge_1RB_Left	23.04	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+M	Edge_1RB_Right	23.20	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+H	Outer_Full	25.69	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+H	Inner_Full	26.72	PC2	PASS

DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+H	Edge_1RB_Left	23.37	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+H	Edge_1RB_Right	23.44	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+H	Outer_Full	24.73	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+H	Inner_Full	25.63	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+H	Edge_1RB_Left	23.54	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+H	Edge_1RB_Right	23.36	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+L	Outer_Full	24.96	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+L	Inner_Full	25.93	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+L	Edge_1RB_Left	22.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+L	Edge_1RB_Right	22.69	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+L	Outer_Full	24.02	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+L	Inner_Full	25.02	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+L	Edge_1RB_Left	22.65	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+L	Edge_1RB_Right	22.55	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+M	Outer_Full	25.51	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+M	Inner_Full	26.42	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+M	Edge_1RB_Left	23.14	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+M	Edge_1RB_Right	23.03	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+M	Outer_Full	24.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+M	Inner_Full	25.54	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+M	Edge_1RB_Left	23.23	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+M	Edge_1RB_Right	23.12	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+H	Outer_Full	25.84	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+H	Inner_Full	26.67	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+H	Edge_1RB_Left	23.47	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+H	Edge_1RB_Right	23.41	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+H	Outer_Full	24.72	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+H	Inner_Full	25.85	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+H	Edge_1RB_Left	23.34	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+H	Edge_1RB_Right	23.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+L	Outer_Full	24.98	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+L	Inner_Full	25.94	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+L	Edge_1RB_Left	22.61	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+L	Edge_1RB_Right	22.69	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+L	Outer_Full	23.96	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+L	Inner_Full	24.98	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+L	Edge_1RB_Left	22.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+L	Edge_1RB_Right	22.77	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+M	Outer_Full	25.44	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+M	Inner_Full	26.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+M	Edge_1RB_Left	23.09	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+M	Edge_1RB_Right	23.03	PC2	PASS

DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+M	Outer_Full	24.49	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+M	Inner_Full	25.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+M	Edge_1RB_Left	23.25	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+M	Edge_1RB_Right	23.00	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+H	Outer_Full	25.74	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+H	Inner_Full	26.84	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+H	Edge_1RB_Left	23.31	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+H	Edge_1RB_Right	23.52	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+H	Outer_Full	24.85	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+H	Inner_Full	25.82	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+H	Edge_1RB_Left	23.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+H	Edge_1RB_Right	23.37	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+L	Outer_Full	24.97	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+L	Inner_Full	26.04	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+L	Edge_1RB_Left	22.43	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+L	Edge_1RB_Right	22.57	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+L	Outer_Full	24.05	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+L	Inner_Full	25.00	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+L	Edge_1RB_Left	22.52	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+L	Edge_1RB_Right	22.60	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+M	Outer_Full	25.41	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+M	Inner_Full	26.44	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+M	Edge_1RB_Left	22.89	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+M	Edge_1RB_Right	23.00	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+M	Outer_Full	24.45	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+M	Inner_Full	25.47	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+M	Edge_1RB_Left	23.01	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+M	Edge_1RB_Right	23.12	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+H	Outer_Full	25.67	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+H	Inner_Full	26.70	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+H	Edge_1RB_Left	22.89	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+H	Edge_1RB_Right	23.31	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+H	Outer_Full	24.69	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+H	Inner_Full	25.76	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+H	Edge_1RB_Left	22.99	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+H	Edge_1RB_Right	23.25	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+L	Outer_Full	25.41	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+L	Inner_Full	26.47	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+L	Edge_1RB_Left	22.89	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+L	Edge_1RB_Right	22.99	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+L	Outer_Full	24.47	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+L	Inner_Full	25.48	PC2	PASS

DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+L	Edge_1RB_Left	23.00	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+L	Edge_1RB_Right	23.08	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+M	Outer_Full	25.93	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+M	Inner_Full	26.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+M	Edge_1RB_Left	23.38	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+M	Edge_1RB_Right	23.63	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+M	Outer_Full	25.01	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+M	Inner_Full	25.96	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+M	Edge_1RB_Left	23.38	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+M	Edge_1RB_Right	23.75	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+H	Outer_Full	25.91	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+H	Inner_Full	26.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+H	Edge_1RB_Left	23.40	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+H	Edge_1RB_Right	23.66	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+H	Outer_Full	24.90	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+H	Inner_Full	25.94	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+H	Edge_1RB_Left	23.49	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+H	Edge_1RB_Right	23.69	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+L	Outer_Full	25.41	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+L	Inner_Full	26.40	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+L	Edge_1RB_Left	22.81	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+L	Edge_1RB_Right	22.97	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+L	Outer_Full	24.41	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+L	Inner_Full	25.43	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+L	Edge_1RB_Left	22.55	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+L	Edge_1RB_Right	23.09	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+M	Outer_Full	25.79	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+M	Inner_Full	26.90	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+M	Edge_1RB_Left	23.25	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+M	Edge_1RB_Right	23.54	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+M	Outer_Full	24.90	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+M	Inner_Full	25.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+M	Edge_1RB_Left	23.41	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+M	Edge_1RB_Right	23.51	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+H	Outer_Full	25.89	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+H	Inner_Full	26.84	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+H	Edge_1RB_Left	23.29	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+H	Edge_1RB_Right	23.59	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+H	Outer_Full	24.88	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+H	Inner_Full	25.86	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+H	Edge_1RB_Left	23.41	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+H	Edge_1RB_Right	23.66	PC2	PASS

DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+L	Outer_Full	25.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+L	Inner_Full	26.48	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+L	Edge_1RB_Left	22.91	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+L	Edge_1RB_Right	23.04	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+L	Outer_Full	24.49	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+L	Inner_Full	25.51	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+L	Edge_1RB_Left	22.83	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+L	Edge_1RB_Right	23.06	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+M	Outer_Full	25.98	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+M	Inner_Full	26.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+M	Edge_1RB_Left	23.37	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+M	Edge_1RB_Right	23.52	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+M	Outer_Full	24.99	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+M	Inner_Full	25.96	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+M	Edge_1RB_Left	23.21	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+M	Edge_1RB_Right	23.63	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+H	Outer_Full	25.91	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+H	Inner_Full	26.86	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+H	Edge_1RB_Left	23.24	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+H	Edge_1RB_Right	23.60	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+H	Outer_Full	24.98	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+H	Inner_Full	25.81	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+H	Edge_1RB_Left	23.33	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+H	Edge_1RB_Right	23.68	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+L	Outer_Full	25.82	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+L	Inner_Full	26.89	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+L	Edge_1RB_Left	23.31	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+L	Edge_1RB_Right	23.27	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+L	Outer_Full	24.72	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+L	Inner_Full	25.85	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+L	Edge_1RB_Left	23.49	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+L	Edge_1RB_Right	23.42	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+M	Outer_Full	25.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+M	Inner_Full	27.00	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+M	Edge_1RB_Left	23.43	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+M	Edge_1RB_Right	23.52	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+M	Outer_Full	24.79	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+M	Inner_Full	25.90	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+M	Edge_1RB_Left	23.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+M	Edge_1RB_Right	23.66	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+H	Outer_Full	25.94	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+H	Inner_Full	26.91	PC2	PASS

DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+H	Edge_1RB_Left	23.43	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+H	Edge_1RB_Right	23.68	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+H	Outer_Full	24.91	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+H	Inner_Full	25.86	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+H	Edge_1RB_Left	23.44	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+H	Edge_1RB_Right	23.67	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+L	Outer_Full	25.84	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+L	Inner_Full	26.91	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+L	Edge_1RB_Left	23.25	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+L	Edge_1RB_Right	23.34	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+L	Outer_Full	24.88	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+L	Inner_Full	25.91	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+L	Edge_1RB_Left	23.24	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+L	Edge_1RB_Right	23.47	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+M	Outer_Full	25.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+M	Inner_Full	26.97	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+M	Edge_1RB_Left	23.24	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+M	Edge_1RB_Right	23.49	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+M	Outer_Full	24.86	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+M	Inner_Full	25.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+M	Edge_1RB_Left	23.28	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+M	Edge_1RB_Right	23.53	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+H	Outer_Full	25.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+H	Inner_Full	26.88	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+H	Edge_1RB_Left	23.43	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+H	Edge_1RB_Right	23.53	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+H	Outer_Full	24.94	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+H	Inner_Full	25.89	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+H	Edge_1RB_Left	23.54	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+H	Edge_1RB_Right	23.75	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+L	Outer_Full	25.83	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+L	Inner_Full	26.81	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+L	Edge_1RB_Left	22.94	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+L	Edge_1RB_Right	23.40	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+L	Outer_Full	24.86	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+L	Inner_Full	25.86	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+L	Edge_1RB_Left	22.98	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+L	Edge_1RB_Right	23.42	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+M	Outer_Full	25.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+M	Inner_Full	26.98	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+M	Edge_1RB_Left	22.99	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+M	Edge_1RB_Right	23.27	PC2	PASS

DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+M	Outer_Full	24.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+M	Inner_Full	25.99	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+M	Edge_1RB_Left	23.07	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+M	Edge_1RB_Right	23.40	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+H	Outer_Full	25.90	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+H	Inner_Full	26.70	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+H	Edge_1RB_Left	23.26	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+H	Edge_1RB_Right	23.45	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+H	Outer_Full	24.90	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+H	Inner_Full	25.82	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+H	Edge_1RB_Left	23.17	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+H	Edge_1RB_Right	23.54	PC2	PASS

5G NR EN_DC (P1): DC_2A_N77_3700-3980MHz

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+L	Outer_Full	25.00	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+L	Inner_Full	25.93	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+L	Edge_1RB_Left	22.55	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+L	Edge_1RB_Right	22.61	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+L	Outer_Full	23.98	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+L	Inner_Full	24.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+L	Edge_1RB_Left	22.64	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+L	Edge_1RB_Right	22.74	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+M	Outer_Full	25.40	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+M	Inner_Full	26.60	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+M	Edge_1RB_Left	23.12	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+M	Edge_1RB_Right	23.09	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+M	Outer_Full	24.60	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+M	Inner_Full	25.42	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+M	Edge_1RB_Left	23.04	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+M	Edge_1RB_Right	23.20	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+H	Outer_Full	25.69	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+H	Inner_Full	26.72	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+H	Edge_1RB_Left	23.37	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-QPSK	M+H	Edge_1RB_Right	23.44	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+H	Outer_Full	24.73	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+H	Inner_Full	25.63	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+H	Edge_1RB_Left	23.54	PC2	PASS
DC_2A_n77A-3700-3980	30	5+10	DFT-16QAM	M+H	Edge_1RB_Right	23.36	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+L	Outer_Full	24.96	PC2	PASS

DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+L	Inner_Full	25.93	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+L	Edge_1RB_Left	22.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+L	Edge_1RB_Right	22.69	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+L	Outer_Full	24.02	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+L	Inner_Full	25.02	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+L	Edge_1RB_Left	22.65	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+L	Edge_1RB_Right	22.55	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+M	Outer_Full	25.51	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+M	Inner_Full	26.42	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+M	Edge_1RB_Left	23.14	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+M	Edge_1RB_Right	23.03	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+M	Outer_Full	24.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+M	Inner_Full	25.54	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+M	Edge_1RB_Left	23.23	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+M	Edge_1RB_Right	23.12	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+H	Outer_Full	25.84	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+H	Inner_Full	26.67	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+H	Edge_1RB_Left	23.47	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-QPSK	M+H	Edge_1RB_Right	23.41	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+H	Outer_Full	24.72	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+H	Inner_Full	25.85	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+H	Edge_1RB_Left	23.34	PC2	PASS
DC_2A_n77A-3700-3980	30	5+15	DFT-16QAM	M+H	Edge_1RB_Right	23.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+L	Outer_Full	24.98	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+L	Inner_Full	25.94	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+L	Edge_1RB_Left	22.61	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+L	Edge_1RB_Right	22.69	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+L	Outer_Full	23.96	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+L	Inner_Full	24.98	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+L	Edge_1RB_Left	22.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+L	Edge_1RB_Right	22.77	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+M	Outer_Full	25.44	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+M	Inner_Full	26.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+M	Edge_1RB_Left	23.09	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+M	Edge_1RB_Right	23.03	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+M	Outer_Full	24.49	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+M	Inner_Full	25.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+M	Edge_1RB_Left	23.25	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+M	Edge_1RB_Right	23.00	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+H	Outer_Full	25.74	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+H	Inner_Full	26.84	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+H	Edge_1RB_Left	23.31	PC2	PASS

DC_2A_n77A-3700-3980	30	5+20	DFT-QPSK	M+H	Edge_1RB_Right	23.52	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+H	Outer_Full	24.85	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+H	Inner_Full	25.82	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+H	Edge_1RB_Left	23.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+20	DFT-16QAM	M+H	Edge_1RB_Right	23.37	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+L	Outer_Full	24.97	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+L	Inner_Full	26.04	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+L	Edge_1RB_Left	22.43	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+L	Edge_1RB_Right	22.57	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+L	Outer_Full	24.05	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+L	Inner_Full	25.00	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+L	Edge_1RB_Left	22.52	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+L	Edge_1RB_Right	22.60	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+M	Outer_Full	25.41	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+M	Inner_Full	26.44	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+M	Edge_1RB_Left	22.89	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+M	Edge_1RB_Right	23.00	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+M	Outer_Full	24.45	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+M	Inner_Full	25.47	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+M	Edge_1RB_Left	23.01	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+M	Edge_1RB_Right	23.12	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+H	Outer_Full	25.67	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+H	Inner_Full	26.70	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+H	Edge_1RB_Left	22.89	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-QPSK	M+H	Edge_1RB_Right	23.31	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+H	Outer_Full	24.69	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+H	Inner_Full	25.76	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+H	Edge_1RB_Left	22.99	PC2	PASS
DC_2A_n77A-3700-3980	30	5+40	DFT-16QAM	M+H	Edge_1RB_Right	23.25	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+L	Outer_Full	25.41	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+L	Inner_Full	26.47	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+L	Edge_1RB_Left	22.89	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+L	Edge_1RB_Right	22.99	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+L	Outer_Full	24.47	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+L	Inner_Full	25.48	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+L	Edge_1RB_Left	23.00	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+L	Edge_1RB_Right	23.08	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+M	Outer_Full	25.93	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+M	Inner_Full	26.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+M	Edge_1RB_Left	23.38	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+M	Edge_1RB_Right	23.63	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+M	Outer_Full	25.01	PC2	PASS

DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+M	Inner_Full	25.96	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+M	Edge_1RB_Left	23.38	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+M	Edge_1RB_Right	23.75	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+H	Outer_Full	25.91	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+H	Inner_Full	26.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+H	Edge_1RB_Left	23.40	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-QPSK	M+H	Edge_1RB_Right	23.66	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+H	Outer_Full	24.90	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+H	Inner_Full	25.94	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+H	Edge_1RB_Left	23.49	PC2	PASS
DC_2A_n77A-3700-3980	30	5+50	DFT-16QAM	M+H	Edge_1RB_Right	23.69	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+L	Outer_Full	25.41	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+L	Inner_Full	26.40	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+L	Edge_1RB_Left	22.81	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+L	Edge_1RB_Right	22.97	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+L	Outer_Full	24.41	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+L	Inner_Full	25.43	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+L	Edge_1RB_Left	22.55	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+L	Edge_1RB_Right	23.09	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+M	Outer_Full	25.79	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+M	Inner_Full	26.90	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+M	Edge_1RB_Left	23.25	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+M	Edge_1RB_Right	23.54	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+M	Outer_Full	24.90	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+M	Inner_Full	25.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+M	Edge_1RB_Left	23.41	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+M	Edge_1RB_Right	23.51	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+H	Outer_Full	25.89	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+H	Inner_Full	26.84	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+H	Edge_1RB_Left	23.29	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-QPSK	M+H	Edge_1RB_Right	23.59	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+H	Outer_Full	24.88	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+H	Inner_Full	25.86	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+H	Edge_1RB_Left	23.41	PC2	PASS
DC_2A_n77A-3700-3980	30	5+60	DFT-16QAM	M+H	Edge_1RB_Right	23.66	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+L	Outer_Full	25.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+L	Inner_Full	26.48	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+L	Edge_1RB_Left	22.91	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+L	Edge_1RB_Right	23.04	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+L	Outer_Full	24.49	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+L	Inner_Full	25.51	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+L	Edge_1RB_Left	22.83	PC2	PASS

DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+L	Edge_1RB_Right	23.06	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+M	Outer_Full	25.98	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+M	Inner_Full	26.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+M	Edge_1RB_Left	23.37	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+M	Edge_1RB_Right	23.52	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+M	Outer_Full	24.99	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+M	Inner_Full	25.96	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+M	Edge_1RB_Left	23.21	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+M	Edge_1RB_Right	23.63	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+H	Outer_Full	25.91	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+H	Inner_Full	26.86	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+H	Edge_1RB_Left	23.24	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-QPSK	M+H	Edge_1RB_Right	23.60	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+H	Outer_Full	24.98	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+H	Inner_Full	25.81	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+H	Edge_1RB_Left	23.33	PC2	PASS
DC_2A_n77A-3700-3980	30	5+70	DFT-16QAM	M+H	Edge_1RB_Right	23.68	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+L	Outer_Full	25.82	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+L	Inner_Full	26.89	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+L	Edge_1RB_Left	23.31	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+L	Edge_1RB_Right	23.27	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+L	Outer_Full	24.72	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+L	Inner_Full	25.85	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+L	Edge_1RB_Left	23.49	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+L	Edge_1RB_Right	23.42	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+M	Outer_Full	25.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+M	Inner_Full	27.00	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+M	Edge_1RB_Left	23.43	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+M	Edge_1RB_Right	23.52	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+M	Outer_Full	24.79	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+M	Inner_Full	25.90	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+M	Edge_1RB_Left	23.50	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+M	Edge_1RB_Right	23.66	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+H	Outer_Full	25.94	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+H	Inner_Full	26.91	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+H	Edge_1RB_Left	23.43	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-QPSK	M+H	Edge_1RB_Right	23.68	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+H	Outer_Full	24.91	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+H	Inner_Full	25.86	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+H	Edge_1RB_Left	23.44	PC2	PASS
DC_2A_n77A-3700-3980	30	5+80	DFT-16QAM	M+H	Edge_1RB_Right	23.67	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+L	Outer_Full	25.84	PC2	PASS

DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+L	Inner_Full	26.91	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+L	Edge_1RB_Left	23.25	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+L	Edge_1RB_Right	23.34	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+L	Outer_Full	24.88	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+L	Inner_Full	25.91	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+L	Edge_1RB_Left	23.24	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+L	Edge_1RB_Right	23.47	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+M	Outer_Full	25.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+M	Inner_Full	26.97	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+M	Edge_1RB_Left	23.24	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+M	Edge_1RB_Right	23.49	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+M	Outer_Full	24.86	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+M	Inner_Full	25.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+M	Edge_1RB_Left	23.28	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+M	Edge_1RB_Right	23.53	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+H	Outer_Full	25.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+H	Inner_Full	26.88	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+H	Edge_1RB_Left	23.43	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-QPSK	M+H	Edge_1RB_Right	23.53	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+H	Outer_Full	24.94	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+H	Inner_Full	25.89	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+H	Edge_1RB_Left	23.54	PC2	PASS
DC_2A_n77A-3700-3980	30	5+90	DFT-16QAM	M+H	Edge_1RB_Right	23.75	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+L	Outer_Full	25.83	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+L	Inner_Full	26.81	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+L	Edge_1RB_Left	22.94	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+L	Edge_1RB_Right	23.40	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+L	Outer_Full	24.86	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+L	Inner_Full	25.86	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+L	Edge_1RB_Left	22.98	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+L	Edge_1RB_Right	23.42	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+M	Outer_Full	25.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+M	Inner_Full	27.02	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+M	Edge_1RB_Left	22.99	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+M	Edge_1RB_Right	23.27	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+M	Outer_Full	24.95	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+M	Inner_Full	25.99	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+M	Edge_1RB_Left	23.07	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+M	Edge_1RB_Right	23.40	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+H	Outer_Full	25.90	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+H	Inner_Full	26.70	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+H	Edge_1RB_Left	23.26	PC2	PASS

DC_2A_n77A-3700-3980	30	5+100	DFT-QPSK	M+H	Edge_1RB_Right	23.45	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+H	Outer_Full	24.90	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+H	Inner_Full	25.82	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+H	Edge_1RB_Left	23.17	PC2	PASS
DC_2A_n77A-3700-3980	30	5+100	DFT-16QAM	M+H	Edge_1RB_Right	23.54	PC2	PASS

Remark:

1. Per KDB941225 D05 v02r05, Start with the largest channel bandwidth then measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle, and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.
2. Per KDB941225 D05 v02r05, The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
3. Per KDB941225 D05 v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations, and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB941225 D05 v02r05, For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in 5.2.1, 5.2.2, and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

WLAN(5.2GHz)(P1)-Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 36	5180	14.45	15.0
	CH 40	5200	14.51	15.0
	CH 48	5240	14.60	15.0
802.11n (HT20)	CH 36	5180	13.27	15.0
	CH 40	5200	13.37	15.0
	CH 48	5240	13.49	15.0
802.11n (HT40)	CH 38	5190	13.35	15.0
	CH 46	5230	13.40	15.0
802.11ac-VHT20	CH 36	5180	13.18	15.0
	CH 40	5200	13.29	15.0
	CH 48	5240	13.46	15.0
802.11ac-VHT40	CH 38	5190	13.26	15.0
	CH 46	5230	13.38	15.0
802.11ac-VHT80	CH42	5210	13.07	15.0

WLAN(5.3GHz)(P1) Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 52	5260	14.75	15.0
	CH 56	5280	14.66	15.0
	CH 64	5320	14.51	15.0
802.11n (HT20)	CH 52	5260	13.68	15.0
	CH 56	5280	13.89	15.0
	CH 64	5320	13.76	15.0
802.11n (HT40)	CH 54	5270	13.65	15.0
	CH62	5310	13.21	15.0
802.11ac-VHT20	CH 52	5260	13.69	15.0
	CH 56	5280	13.89	15.0
	CH 64	5320	13.84	15.0
802.11ac-VHT40	CH 54	5270	13.70	15.0
	CH 62	5310	13.90	15.0
802.11ac-VHT80	CH 58	5290	13.57	15.0

WLAN(5.6GHz)(P1)-Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 100	5500	14.42	14.5
	CH 120	5600	14.28	14.5
	CH 140	5700	14.20	14.5
802.11n (HT20)	CH 100	5500	13.41	14.5
	CH 120	5600	13.51	14.5
	CH 140	5700	13.48	14.5
802.11n (HT40)	CH 102	5510	13.22	14.5
	CH 118	5590	13.51	14.5
	CH 134	5670	13.13	14.5
802.11ac-VHT20	CH 100	5500	13.35	14.5
	CH 120	5600	13.53	14.5
	CH 140	5700	13.52	14.5
802.11ac-VHT40	CH 102	5510	13.16	14.5
	CH 118	5590	13.38	14.5
	CH 134	5670	13.48	14.5
802.11ac-VHT80	CH 106	5530	12.85	14.5
	CH 122	5610	13.38	14.5

WLAN(5.8GHz)(P1) Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 149	5745	14.36	15.0
	CH 157	5785	14.61	15.0
	CH 165	5825	14.80	15.0
802.11n (HT20)	CH 149	5745	13.32	15.0
	CH 157	5785	13.43	15.0
	CH 165	5825	13.53	15.0
802.11n (HT40)	CH 151	5755	13.34	15.0
	CH 159	5795	13.39	15.0
802.11ac-VHT20	CH 149	5745	13.36	15.0
	CH 157	5785	13.30	15.0
	CH 165	5825	13.56	15.0
802.11ac-VHT40	CH 151	5755	13.38	15.0
	CH 159	5795	13.37	15.0
802.11ac-VHT80	CH 155	5755	13.06	15.0

WLAN(5.2GHz)(P2)-Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 36	5180	13.29	13.5
	CH 40	5200	13.12	13.5
	CH 48	5240	13.05	13.5
802.11n (HT20)	CH 36	5180	12.51	13.5
	CH 40	5200	12.65	13.5
	CH 48	5240	12.39	13.5
802.11n (HT40)	CH 38	5190	12.51	13.5
	CH 46	5230	12.70	13.5
802.11ac-VHT20	CH 36	5180	12.59	13.5
	CH 40	5200	12.69	13.5
	CH 48	5240	12.77	13.5
802.11ac-VHT40	CH 38	5190	12.55	13.5
	CH 46	5230	12.66	13.5
802.11ac-VHT80	CH 42	5210	12.46	13.5

WLAN(5.3GHz)(P2) Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 52	5260	13.62	14.0
	CH 56	5280	13.93	14.0
	CH 64	5320	13.85	14.0
802.11n (HT20)	CH 52	5260	12.45	14.0
	CH 56	5280	12.77	14.0
	CH 64	5320	12.83	14.0
802.11n (HT40)	CH 54	5270	12.56	14.0
	CH 62	5310	12.79	14.0
802.11ac-VHT20	CH 52	5260	12.44	14.0
	CH 56	5280	12.87	14.0
	CH 64	5320	12.79	14.0
802.11ac-VHT40	CH 54	5270	12.45	14.0
	CH 62	5310	12.83	14.0
802.11ac-VHT80	CH 58	5290	12.65	14.0

WLAN(5.6GHz)(P2)-Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 100	5500	13.45	13.5
	CH 120	5600	13.12	13.5
	CH 140	5700	13.07	13.5
802.11n (HT20)	CH 100	5500	12.82	13.5
	CH 120	5600	12.94	13.5
	CH 140	5700	12.84	13.5
802.11n (HT40)	CH 102	5510	12.25	13.5
	CH 118	5590	12.98	13.5
	CH 134	5670	12.51	13.5
802.11ac-VHT20	CH 100	5500	12.85	13.5
	CH 120	5600	12.99	13.5
	CH 140	5700	12.46	13.5
802.11ac-VHT40	CH 102	5510	12.16	13.5
	CH 118	5590	12.30	13.5
	CH 134	5670	12.48	13.5
802.11ac-VHT80	CH 106	5530	12.37	13.5
	CH 122	5610	12.75	13.5

WLAN(5.8GHz)(P2) Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 149	5745	13.27	13.5
	CH 157	5785	13.45	13.5
	CH 165	5825	13.48	13.5
802.11n (HT20)	CH 149	5745	12.09	13.5
	CH 157	5785	12.11	13.5
	CH 165	5825	12.28	13.5
802.11n (HT40)	CH 151	5755	12.73	13.5
	CH 159	5795	12.25	13.5
802.11ac-VHT20	CH 149	5745	12.08	13.5
	CH 157	5785	12.13	13.5
	CH 165	5825	12.33	13.5
802.11ac-VHT40	CH 151	5755	12.12	13.5
	CH 159	5795	12.63	13.5
802.11ac-VHT80	CH 155	5755	12.41	13.5

WLAN(2.4GHz)(P1) Antenna 7					
Test Mode	Data Rate	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	18.86	19.0
		CH 06	2437	18.64	19.0
		CH 11	2462	18.37	19.0
802.11g	6Mbps	CH 01	2412	16.29	17.0
		CH 06	2437	15.96	17.0
		CH 11	2462	15.78	17.0
802.11n (20MHz)	MCS0	CH 01	2412	15.67	16.0
		CH 06	2437	15.41	16.0
		CH 11	2462	15.01	16.0
802.11n (40MHz)	MCS0	CH 03	2422	14.90	15.0
		CH 06	2437	14.58	15.0
		CH 09	2452	14.57	15.0

WLAN(2.4GHz)(P2) Antenna 7					
Test Mode	Data Rate	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	14.34	14.5
		CH 06	2437	14.41	14.5
		CH 11	2462	14.19	14.5
802.11g	6Mbps	CH 01	2412	13.50	14.0
		CH 06	2437	13.46	14.0
		CH 11	2462	13.28	14.0
802.11n (20MHz)	MCS0	CH 01	2412	13.35	14.0
		CH 06	2437	13.15	14.0
		CH 11	2462	13.05	14.0
802.11n (40MHz)	MCS0	CH 03	2422	13.43	14.0
		CH 06	2437	13.19	14.0
		CH 09	2452	13.09	14.0

Remark:

1. Per KDB 248227 D01 v02r02, for 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.
2. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements ,when the reported SAR of the highest measured maximum output power channel (see 3.1) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

3. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg.

4. Per KDB 248227 D01 v02r02, When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined by applying the following steps sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations in a frequency band with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

Test Mode	Data Rate	Channel	Conducted Power (dBm)	Tune-up power (dBm)
GFSK	1Mbps	Low	14.08	18.0
		Middle	14.09	18.0
		High	17.61	18.0
Pi/4 QDPSK	2Mbps	Low	13.37	18.0
		Middle	13.40	18.0
		High	17.18	18.0
8DPSK	3Mbps	Low	13.09	18.0
		Middle	13.12	18.0
		High	16.91	18.0

Bluetooth					
Test Mode	Data Rate	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
BLE	1Mbps	CH 00	2402	-2.57	-2.0
		CH 19	2440	-2.27	-2.0
		CH 39	2480	-2.21	-2.0

NFC				
Test Mode	Channel(MHz)	Max. Field Strength(dBuV/m)	Conducted Power (dBm)	Tune- up power (dBm)
NFC	13.56	60.52	-34.7	-34.0

Remark:

NFC maximum output power is -34.7dBm respectively, and Maximum Tune-Up output power is -34.0dBm respectively,. Per KDB 447498 D01 V06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR,16 where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation¹⁷
- The result is rounded to one decimal place for comparison

NFC:

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	Result	Limit
-34.0	0.0004	5	0.01356	0.0001	3

The exclusion thresholds is $0.0001 < 3$, therefore, the RF exposure evaluation is not required.

9.2 Test Results for Standalone SAR Test

Head SAR

GSM850(P1) – Head SAR Test									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
1.	GSM	Right Cheek	190	836.6	32.77	33.0	1.054	0.133	0.140
	GSM	Right Tilted	190	836.6	32.77	33.0	1.054	0.124	0.131
	GSM	Left Cheek	190	836.6	32.77	33.0	1.054	0.129	0.136
	GSM	Left Tilted	190	836.6	32.77	33.0	1.054	0.122	0.129

GPRS850(P1) – Head SAR Test									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
2.	GPRS_2TX	Right Cheek	190	836.6	31.87	32.0	1.030	0.215	0.222
	GPRS_2TX	Right Tilted	190	836.6	31.87	32.0	1.030	0.201	0.207
	GPRS_2TX	Left Cheek	190	836.6	31.87	32.0	1.030	0.178	0.183
	GPRS_2TX	Left Tilted	190	836.6	31.87	32.0	1.030	0.167	0.172

GSM1900(P1) – Head SAR Test									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	GSM	Right Cheek	661	1880	29.89	30.0	1.026	0.075	0.077
	GSM	Right Tilted	661	1880	29.89	30.0	1.026	0.071	0.073
3.	GSM	Left Cheek	661	1880	29.89	30.0	1.026	0.097	0.099
	GSM	Left Tilted	661	1880	29.89	30.0	1.026	0.089	0.091

GPRS1900(P1) – Head SAR Test									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	M Hz					
	GPRS_4TX	Right Cheek	810	1909.8	24.72	25.0	1.067	0.037	0.039
	GPRS_4TX	Right Tilted	810	1909.8	24.72	25.0	1.067	0.034	0.036
4.	GPRS_4TX	Left Cheek	810	1909.8	24.72	25.0	1.067	0.091	0.097
	GPRS_4TX	Left Tilted	810	1909.8	24.72	25.0	1.067	0.085	0.091

WCDMA Band 2(P1) – Head SAR Test									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	RMC	Right Cheek	9538	1907.6	22.62	23.0	1.091	0.048	0.052
	RMC	Right Tilted	9538	1907.6	22.62	23.0	1.091	0.042	0.046
5.	RMC	Left Cheek	9538	1907.6	22.62	23.0	1.091	0.162	0.177
	RMC	Left Tilted	9538	1907.6	22.62	23.0	1.091	0.151	0.165

WCDMA Band 4(P1) – Head SAR Test									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	RMC	Right Cheek	1312	1712.4	22.88	23.0	1.028	0.062	0.064
	RMC	Right Tilted	1312	1712.4	22.88	23.0	1.028	0.056	0.058
6.	RMC	Left Cheek	1312	1712.4	22.88	23.0	1.028	0.194	0.199
	RMC	Left Tilted	1312	1712.4	22.88	23.0	1.028	0.182	0.187

WCDMA Band 5(P1) – Head SAR Test									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
7.	RMC	Right Cheek	4132	826.4	22.25	22.5	1.059	0.099	0.105
	RMC	Right Tilted	4132	826.4	22.25	22.5	1.059	0.084	0.089
	RMC	Left Cheek	4132	826.4	22.25	22.5	1.059	0.072	0.076
	RMC	Left Tilted	4132	826.4	22.25	22.5	1.059	0.068	0.072

LTE Band 2(P1)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
8.	QPSK 20MHz 1RB	Right Cheek	1900	22.84	23.0	1.038	0.124	0.129
	QPSK 20MHz 1RB	Right Tilted	1900	22.84	23.0	1.038	0.118	0.122
	QPSK 20MHz 1RB	Left Cheek	1900	22.84	23.0	1.038	0.075	0.078
	QPSK 20MHz 1RB	Left Tilted	1900	22.84	23.0	1.038	0.071	0.074
	QPSK 20MHz 50%RB	Right Cheek	1900	22.84	23.0	1.038	0.116	0.120
	QPSK 20MHz 50%RB	Right Tilted	1900	22.84	23.0	1.038	0.108	0.112
	QPSK 20MHz 50%RB	Left Cheek	1900	22.84	23.0	1.038	0.072	0.075
	QPSK 20MHz 50%RB	Left Tilted	1900	22.84	23.0	1.038	0.067	0.070

LTE Band 4(P1)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 20MHz 1RB	Right Cheek	1720	23.05	23.5	1.109	0.102	0.113
	QPSK 20MHz 1RB	Right Tilted	1720	23.05	23.5	1.109	0.096	0.106
9.	QPSK 20MHz 1RB	Left Cheek	1720	23.05	23.5	1.109	0.114	0.126
	QPSK 20MHz 1RB	Left Tilted	1720	23.05	23.5	1.109	0.108	0.120
	QPSK 20MHz 50%RB	Right Cheek	1720	23.05	23.5	1.109	0.099	0.110
	QPSK 20MHz 50%RB	Right Tilted	1720	23.05	23.5	1.109	0.091	0.101
	QPSK 20MHz 50%RB	Left Cheek	1720	23.05	23.5	1.109	0.109	0.121
	QPSK 20MHz 50%RB	Left Tilted	1720	23.05	23.5	1.109	0.106	0.118

LTE Band 5(P1)-Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 10MHz 1RB	Right Cheek	829	23.93	24.0	1.016	0.090	0.091
	QPSK 10MHz 1RB	Right Tilted	829	23.93	24.0	1.016	0.083	0.084
10.	QPSK 10MHz 1RB	Left Cheek	829	23.93	24.0	1.016	0.134	0.136
	QPSK 10MHz 1RB	Left Tilted	829	23.93	24.0	1.016	0.125	0.127
	QPSK 10MHz 50%RB	Right Cheek	829	23.93	24.0	1.016	0.087	0.088
	QPSK 10MHz 50%RB	Right Tilted	829	23.93	24.0	1.016	0.079	0.080
	QPSK 10MHz 50%RB	Left Cheek	829	23.93	24.0	1.016	0.129	0.131
	QPSK 10MHz 50%RB	Left Tilted	829	23.93	24.0	1.016	0.118	0.120

LTE Band 7(P1)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
11.	QPSK 20MHz 1RB	Right Cheek	2535	22.86	23.0	1.033	0.162	0.167
	QPSK 20MHz 1RB	Right Tilted	2535	22.86	23.0	1.033	0.154	0.159
	QPSK 20MHz 1RB	Left Cheek	2535	22.86	23.0	1.033	0.113	0.117
	QPSK 20MHz 1RB	Left Tilted	2535	22.86	23.0	1.033	0.104	0.107
	QPSK 20MHz 50%RB	Right Cheek	2535	22.86	23.0	1.033	0.157	0.162
	QPSK 20MHz 50%RB	Right Tilted	2535	22.86	23.0	1.033	0.148	0.153
	QPSK 20MHz 50%RB	Left Cheek	2535	22.86	23.0	1.033	0.108	0.112
	QPSK 20MHz 50%RB	Left Tilted	2535	22.86	23.0	1.033	0.099	0.102

LTE Band 12(P1)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 10MHz 1RB	Right Cheek	704	23.74	24.0	1.062	0.091	0.097
	QPSK 10MHz 1RB	Right Tilted	704	23.74	24.0	1.062	0.088	0.093
12.	QPSK 10MHz 1RB	Left Cheek	704	23.74	24.0	1.062	0.163	0.173
	QPSK 10MHz 1RB	Left Tilted	704	23.74	24.0	1.062	0.152	0.161
	QPSK 10MHz 50%RB	Right Cheek	704	23.74	24.0	1.062	0.085	0.090
	QPSK 10MHz 50%RB	Right Tilted	704	23.74	24.0	1.062	0.082	0.087
	QPSK 10MHz 50%RB	Left Cheek	704	23.74	24.0	1.062	0.154	0.164
	QPSK 10MHz 50%RB	Left Tilted	704	23.74	24.0	1.062	0.146	0.155

LTE Band 13(P1)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
13.	QPSK 10MHz 1RB	Right Cheek	782	23.78	24.0	1.052	0.111	0.117
	QPSK 10MHz 1RB	Right Tilted	782	23.78	24.0	1.052	0.100	0.105
	QPSK 10MHz 1RB	Left Cheek	782	23.78	24.0	1.052	0.091	0.096
	QPSK 10MHz 1RB	Left Tilted	782	23.78	24.0	1.052	0.086	0.090
	QPSK 10MHz 50%RB	Right Cheek	782	23.78	24.0	1.052	0.108	0.114
	QPSK 10MHz 50%RB	Right Tilted	782	23.78	24.0	1.052	0.095	0.100
	QPSK 10MHz 50%RB	Left Cheek	782	23.78	24.0	1.052	0.087	0.092
	QPSK 10MHz 50%RB	Left Tilted	782	23.78	24.0	1.052	0.081	0.085

LTE Band 17(P1)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 10MHz 1RB	Right Cheek	709	23.79	24.0	1.050	0.140	0.147
	QPSK 10MHz 1RB	Right Tilted	709	23.79	24.0	1.050	0.122	0.128
14.	QPSK 10MHz 1RB	Left Cheek	709	23.79	24.0	1.050	0.173	0.182
	QPSK 10MHz 1RB	Left Tilted	709	23.79	24.0	1.050	0.161	0.169
	QPSK 10MHz 50%RB	Right Cheek	709	23.79	24.0	1.050	0.136	0.143
	QPSK 10MHz 50%RB	Right Tilted	709	23.79	24.0	1.050	0.118	0.124
	QPSK 10MHz 50%RB	Left Cheek	709	23.79	24.0	1.050	0.159	0.167
	QPSK 10MHz 50%RB	Left Tilted	709	23.79	24.0	1.050	0.152	0.160

LTE Band 25(P1)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
15.	QPSK 20MHz 1RB	Right Cheek	1905	22.81	23.0	1.045	0.123	0.129
	QPSK 20MHz 1RB	Right Tilted	1905	22.81	23.0	1.045	0.115	0.120
	QPSK 20MHz 1RB	Left Cheek	1905	22.81	23.0	1.045	0.075	0.078
	QPSK 20MHz 1RB	Left Tilted	1905	22.81	23.0	1.045	0.068	0.071
	QPSK 20MHz 50%RB	Right Cheek	1905	22.81	23.0	1.045	0.117	0.122
	QPSK 20MHz 50%RB	Right Tilted	1905	22.81	23.0	1.045	0.109	0.114
	QPSK 20MHz 50%RB	Left Cheek	1905	22.81	23.0	1.045	0.071	0.074
	QPSK 20MHz 50%RB	Left Tilted	1905	22.81	23.0	1.045	0.065	0.068

LTE Band 26(814-824MHz) (P1)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 10MHz 1RB	Right Cheek	819	24.07	24.5	1.104	0.114	0.126
	QPSK 10MHz 1RB	Right Tilted	819	24.07	24.5	1.104	0.099	0.109
16.	QPSK 10MHz 1RB	Left Cheek	819	24.07	24.5	1.104	0.119	0.131
	QPSK 10MHz 1RB	Left Tilted	819	24.07	24.5	1.104	0.101	0.112
	QPSK 10MHz 50%RB	Right Cheek	819	24.07	24.5	1.104	0.108	0.119
	QPSK 10MHz 50%RB	Right Tilted	819	24.07	24.5	1.104	0.095	0.105
	QPSK 15MHz 50%RB	Left Cheek	819	24.07	24.5	1.104	0.113	0.125
	QPSK 15MHz 50%RB	Left Tilted	819	24.07	24.5	1.104	0.096	0.106

LTE Band 26(824-849MHz) (P1)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 15MHz 1RB	Right Cheek	831.5	23.84	24.0	1.038	0.091	0.094
	QPSK 15MHz 1RB	Right Tilted	831.5	23.84	24.0	1.038	0.088	0.091
17.	QPSK 15MHz 1RB	Left Cheek	831.5	23.84	24.0	1.038	0.099	0.103
	QPSK 15MHz 1RB	Left Tilted	831.5	23.84	24.0	1.038	0.092	0.095
	QPSK 15MHz 50%RB	Right Cheek	831.5	23.84	24.0	1.038	0.086	0.089
	QPSK 15MHz 50%RB	Right Tilted	831.5	23.84	24.0	1.038	0.082	0.085
	QPSK 15MHz 50%RB	Left Cheek	831.5	23.84	24.0	1.038	0.091	0.094
	QPSK 15MHz 50%RB	Left Tilted	831.5	23.84	24.0	1.038	0.087	0.090

LTE Band 38(P1)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 20MHz 1RB	Right Cheek	2595	22.32	22.5	1.042	0.052	0.054
	QPSK 20MHz 1RB	Right Tilted	2595	22.32	22.5	1.042	0.048	0.050
18.	QPSK 20MHz 1RB	Left Cheek	2595	22.32	22.5	1.042	0.095	0.099
	QPSK 20MHz 1RB	Left Tilted	2595	22.32	22.5	1.042	0.091	0.095
	QPSK 20MHz 50%RB	Right Cheek	2595	22.32	22.5	1.042	0.047	0.049
	QPSK 20MHz 50%RB	Right Tilted	2595	22.32	22.5	1.042	0.042	0.044
	QPSK 20MHz 50%RB	Left Cheek	2595	22.32	22.5	1.042	0.091	0.095
	QPSK 20MHz 50%RB	Left Tilted	2595	22.32	22.5	1.042	0.085	0.089

LTE Band 41(P1)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 20MHz 1RB	Right Cheek	2680	22.45	23.0	1.135	0.075	0.085
	QPSK 20MHz 1RB	Right Tilted	2680	22.45	23.0	1.135	0.074	0.084
19.	QPSK 20MHz 1RB	Left Cheek	2680	22.45	23.0	1.135	0.149	0.169
	QPSK 20MHz 1RB	Left Tilted	2680	22.45	23.0	1.135	0.142	0.161
	QPSK 20MHz 50%RB	Right Cheek	2680	22.45	23.0	1.135	0.071	0.081
	QPSK 20MHz 50%RB	Right Tilted	2680	22.45	23.0	1.135	0.068	0.077
	QPSK 20MHz 50%RB	Left Cheek	2680	22.45	23.0	1.135	0.143	0.162
	QPSK 20MHz 50%RB	Left Tilted	2680	22.45	23.0	1.135	0.138	0.157

LTE Band66(P1)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 20MHz 1RB	Right Cheek	1720	23.25	23.5	1.059	0.105	0.111
	QPSK 20MHz 1RB	Right Tilted	1720	23.25	23.5	1.059	0.101	0.107
20.	QPSK 20MHz 1RB	Left Cheek	1720	23.25	23.5	1.059	0.124	0.131
	QPSK 20MHz 1RB	Left Tilted	1720	23.25	23.5	1.059	0.119	0.126
	QPSK 20MHz 50%RB	Right Cheek	1720	23.25	23.5	1.059	0.099	0.105
	QPSK 20MHz 50%RB	Right Tilted	1720	23.25	23.5	1.059	0.093	0.099
	QPSK 20MHz 50%RB	Left Cheek	1720	23.25	23.5	1.059	0.117	0.124
	QPSK 20MHz 50%RB	Left Tilted	1720	23.25	23.5	1.059	0.113	0.120

LTE Band 71(P1)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
21.	QPSK 20MHz 1RB	Right Cheek	688	23.67	24.0	1.079	0.094	0.101
	QPSK 20MHz 1RB	Right Tilted	688	23.67	24.0	1.079	0.089	0.096
	QPSK 20MHz 1RB	Left Cheek	688	23.67	24.0	1.079	0.084	0.091
	QPSK 20MHz 1RB	Left Tilted	688	23.67	24.0	1.079	0.076	0.082
	QPSK 20MHz 50%RB	Right Cheek	688	23.67	24.0	1.079	0.091	0.098
	QPSK 20MHz 50%RB	Right Tilted	688	23.67	24.0	1.079	0.086	0.093
	QPSK 20MHz 50%RB	Left Cheek	688	23.67	24.0	1.079	0.079	0.085
	QPSK 20MHz 50%RB	Left Tilted	688	23.67	24.0	1.079	0.071	0.077

NR n2(P2)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	DFT-s-OFDM QPSK 20MHz 1RB	Right Cheek	1880	16.75	17.0	1.059	0.317	0.336
	DFT-s-OFDM QPSK 20MHz 1RB	Right Tilted	1880	16.75	17.0	1.059	0.312	0.330
22.	DFT-s-OFDM QPSK 20MHz 1RB	Left Cheek	1880	16.75	17.0	1.059	0.413	0.437
	DFT-s-OFDM QPSK 20MHz 1RB	Left Tilted	1880	16.75	17.0	1.059	0.406	0.430
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Cheek	1880	16.75	17.0	1.059	0.314	0.333
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Tilted	1880	16.75	17.0	1.059	0.308	0.326
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Cheek	1880	16.75	17.0	1.059	0.410	0.434
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Tilted	1880	16.75	17.0	1.059	0.406	0.430

NR n5(P1)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
23.	DFT-s-OFDM QPSK 20MHz 1RB	Right Cheek	834	24.83	25.0	1.040	0.129	0.134
	DFT-s-OFDM QPSK 20MHz 1RB	Right Tilted	834	24.83	25.0	1.040	0.123	0.128
	DFT-s-OFDM QPSK 20MHz 1RB	Left Cheek	834	24.83	25.0	1.040	0.083	0.086
	DFT-s-OFDM QPSK 20MHz 1RB	Left Tilted	834	24.83	25.0	1.040	0.074	0.077
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Cheek	834	24.83	25.0	1.040	0.125	0.130
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Tilted	834	24.83	25.0	1.040	0.120	0.125
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Cheek	834	24.83	25.0	1.040	0.080	0.083
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Tilted	834	24.83	25.0	1.040	0.071	0.074

NR n25(P2)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	DFT-s-OFDM QPSK 20MHz 1RB	Right Cheek	1860	16.86	17.0	1.033	0.326	0.337
	DFT-s-OFDM QPSK 20MHz 1RB	Right Tilted	1860	16.86	17.0	1.033	0.310	0.320
24.	DFT-s-OFDM QPSK 20MHz 1RB	Left Cheek	1860	16.86	17.0	1.033	0.431	0.445
	DFT-s-OFDM QPSK 20MHz 1RB	Left Tilted	1860	16.86	17.0	1.033	0.422	0.436
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Cheek	1860	16.86	17.0	1.033	0.315	0.325
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Tilted	1860	16.86	17.0	1.033	0.309	0.319
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Cheek	1860	16.86	17.0	1.033	0.423	0.437
	DFT-s-OFDM QPSK	Left Tilted	1860	16.86	17.0	1.033	0.420	0.434

	20MHz 50%RB							
--	-------------	--	--	--	--	--	--	--

NR n41(P1)–Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	DFT-s-OFDM QPSK 100MHz 1RB	Right Cheek	2546	25.96	26.0	1.009	0.018	0.018
	DFT-s-OFDM QPSK 100MHz 1RB	Right Tilted	2546	25.96	26.0	1.009	0.017	0.017
25.	DFT-s-OFDM QPSK 100MHz 1RB	Left Cheek	2546	25.96	26.0	1.009	0.030	0.030
	DFT-s-OFDM QPSK 100MHz 1RB	Left Tilted	2546	25.96	26.0	1.009	0.028	0.028
	DFT-s-OFDM QPSK 100MHz 50%RB	Right Cheek	2546	25.96	26.0	1.009	0.016	0.016
	DFT-s-OFDM QPSK 100MHz 50%RB	Right Tilted	2546	25.96	26.0	1.009	0.014	0.014
	CP-OFDM-QPSK 100MHz 50%RB	Left Cheek	2546	25.96	26.0	1.009	0.027	0.027
	DFT-s-OFDM QPSK 100MHz 50%RB	Left Tilted	2546	25.96	26.0	1.009	0.024	0.024

NR n66(P2)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	DFT-s-OFDM QPSK 20MHz 1RB	Right Cheek	1745	16.65	17.0	1.084	0.405	0.439
	DFT-s-OFDM QPSK 20MHz 1RB	Right Tilted	1745	16.65	17.0	1.084	0.393	0.426
26.	DFT-s-OFDM QPSK 20MHz 1RB	Left Cheek	1745	16.65	17.0	1.084	0.421	0.456
	DFT-s-OFDM QPSK 20MHz 1RB	Left Tilted	1745	16.65	17.0	1.084	0.410	0.444
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Cheek	1745	16.65	17.0	1.084	0.400	0.434
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Tilted	1745	16.65	17.0	1.084	0.398	0.431
	DFT-s-OFDM QPSK	Left Cheek	1745	16.65	17.0	1.084	0.415	0.450

	20MHz 50%RB							
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Tilted	1745	16.65	17.0	1.084	0.406	0.440

NR n71(P1)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
27.	CP-OFDM-QPSK 20MHz 1RB	Right Cheek	688	24.89	25.0	1.026	0.083	0.085
	CP-OFDM-QPSK 20MHz 1RB	Right Tilted	688	24.89	25.0	1.026	0.075	0.077
	CP-OFDM-QPSK 20MHz 1RB	Left Cheek	688	24.89	25.0	1.026	0.030	0.031
	CP-OFDM-QPSK 20MHz 1RB	Left Tilted	688	24.89	25.0	1.026	0.026	0.027
	CP-OFDM-QPSK 20MHz 50%RB	Right Cheek	688	24.89	25.0	1.026	0.079	0.081
	CP-OFDM-QPSK 20MHz 50%RB	Right Tilted	688	24.89	25.0	1.026	0.073	0.075
	CP-OFDM-QPSK 20MHz 50%RB	Left Cheek	688	24.89	25.0	1.026	0.026	0.027
	CP-OFDM-QPSK 20MHz 50%RB	Left Tilted	688	24.89	25.0	1.026	0.021	0.022

NR n77_3450-3550MHz(P2)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	CP-OFDM-QPSK 100MHz 1RB	Right Cheek	3500	20.37	20.5	1.030	0.076	0.078
	CP-OFDM-QPSK 100MHz 1RB	Right Tilted	3500	20.37	20.5	1.030	0.071	0.073
28.	CP-OFDM-QPSK 100MHz 1RB	Left Cheek	3500	20.37	20.5	1.030	0.175	0.180
	CP-OFDM-QPSK 100MHz 1RB	Left Tilted	3500	20.37	20.5	1.030	0.167	0.172
	CP-OFDM-QPSK 100MHz 50%RB	Right Cheek	3500	20.37	20.5	1.030	0.072	0.074
	CP-OFDM-QPSK	Right Tilted	3500	20.37	20.5	1.030	0.068	0.070

	100MHz 50%RB							
	CP-OFDM-QPSK 100MHz 50%RB	Left Cheek	3500	20.37	20.5	1.030	0.169	0.174
	CP-OFDM-QPSK 100MHz 50%RB	Left Tilted	3500	20.37	20.5	1.030	0.161	0.166

NR n77_3700-3980MHz(P2)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	DFT-s-OFDM QPSK 100MHz 1RB	Right Cheek	3750	20.69	21.0	1.074	0.063	0.068
	DFT-s-OFDM QPSK 100MHz 1RB	Right Tilted	3750	20.69	21.0	1.074	0.060	0.064
29.	DFT-s-OFDM QPSK 100MHz 1RB	Left Cheek	3750	20.69	21.0	1.074	0.173	0.186
	DFT-s-OFDM QPSK 100MHz 1RB	Left Tilted	3750	20.69	21.0	1.074	0.168	0.180
	DFT-s-OFDM QPSK 100MHz 50%RB	Right Cheek	3750	20.69	21.0	1.074	0.061	0.066
	DFT-s-OFDM QPSK 100MHz 50%RB	Right Tilted	3750	20.69	21.0	1.074	0.057	0.061
	DFT-s-OFDM QPSK 100MHz 50%RB	Left Cheek	3750	20.69	21.0	1.074	0.166	0.178
	DFT-s-OFDM QPSK 100MHz 50%RB	Left Tilted	3750	20.69	21.0	1.074	0.162	0.174

NR DC_7A_n2A(P1)–Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	DFT-s-OFDM QPSK 20MHz 1RB	Right Cheek	1860	23.24	23.5	1.062	0.291	0.309
	DFT-s-OFDM QPSK 20MHz 1RB	Right Tilted	1860	23.24	23.5	1.062	0.285	0.303
30.	DFT-s-OFDM QPSK 20MHz 1RB	Left Cheek	1860	23.24	23.5	1.062	0.366	0.389
	DFT-s-OFDM QPSK 20MHz 1RB	Left Tilted	1860	23.24	23.5	1.062	0.354	0.376

	DFT-s-OFDM QPSK 20MHz 50%RB	Right Cheek	1860	23.24	23.5	1.062	0.289	0.307
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Tilted	1860	23.24	23.5	1.062	0.274	0.291
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Cheek	1860	23.24	23.5	1.062	0.360	0.382
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Tilted	1860	23.24	23.5	1.062	0.356	0.378

NR DC_66A_n5A(P1)–Head SAR Test

Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
31.	DFT-s-OFDM QPSK 20MHz 1RB	Right Cheek	839	23.61	24.0	1.094	0.115	0.126
	DFT-s-OFDM QPSK 20MHz 1RB	Right Tilted	839	23.61	24.0	1.094	0.106	0.116
	DFT-s-OFDM QPSK 20MHz 1RB	Left Cheek	839	23.61	24.0	1.094	0.073	0.080
	DFT-s-OFDM QPSK 20MHz 1RB	Left Tilted	839	23.61	24.0	1.094	0.062	0.068
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Cheek	839	23.61	24.0	1.094	0.109	0.119
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Tilted	839	23.61	24.0	1.094	0.099	0.108
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Cheek	839	23.61	24.0	1.094	0.069	0.075
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Tilted	839	23.61	24.0	1.094	0.058	0.063

NR DC_4A_n41A(P1)–Head SAR Test

Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	DFT-s-OFDM QPSK 100MHz 1RB	Right Cheek	2640	25.86	26.0	1.033	0.018	0.019
	DFT-s-OFDM QPSK 100MHz 1RB	Right Tilted	2640	25.86	26.0	1.033	0.016	0.017
32.	DFT-s-OFDM QPSK 100MHz 1RB	Left Cheek	2640	25.86	26.0	1.033	0.029	0.030

	DFT-s-OFDM QPSK 100MHz 1RB	Left Tilted	2640	25.86	26.0	1.033	0.025	0.026
	DFT-s-OFDM QPSK 100MHz 50%RB	Right Cheek	2640	25.86	26.0	1.033	0.017	0.018
	DFT-s-OFDM QPSK 100MHz 50%RB	Right Tilted	2640	25.86	26.0	1.033	0.015	0.015
	CP-OFDM-QPSK 100MHz 50%RB	Left Cheek	2640	25.86	26.0	1.033	0.027	0.028
	DFT-s-OFDM QPSK 100MHz 50%RB	Left Tilted	2640	25.86	26.0	1.033	0.024	0.025

NR DC_5A_n66A(P1)–Head SAR Test

Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	DFT-s-OFDM QPSK 20MHz 1RB	Right Cheek	1720	23.88	24.0	1.028	0.363	0.373
	DFT-s-OFDM QPSK 20MHz 1RB	Right Tilted	1720	23.88	24.0	1.028	0.351	0.361
33.	DFT-s-OFDM QPSK 20MHz 1RB	Left Cheek	1720	23.88	24.0	1.028	0.394	0.405
	DFT-s-OFDM QPSK 20MHz 1RB	Left Tilted	1720	23.88	24.0	1.028	0.376	0.387
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Cheek	1720	23.88	24.0	1.028	0.360	0.370
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Tilted	1720	23.88	24.0	1.028	0.349	0.359
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Cheek	1720	23.88	24.0	1.028	0.386	0.397
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Tilted	1720	23.88	24.0	1.028	0.366	0.376

NR DC_2A_n77A_3450-3550MHz(P1)–Head SAR Test

Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	DFT-s-OFD QPSK 100MHz 1RB	Right Cheek	3500	26.98	27.5	1.127	0.065	0.073
	DFT-s-OFD QPSK 100MHz 1RB	Right Tilted	3500	26.98	27.5	1.127	0.062	0.070

34.	DFT-s-OFD QPSK 100MHz 1RB	Left Cheek	3500	26.98	27.5	1.127	0.166	0.187
	DFT-s-OFD QPSK 100MHz 1RB	Left Tilted	3500	26.98	27.5	1.127	0.161	0.181
	DFT-s-OFD QPSK 100MHz 50%RB	Right Cheek	3500	26.98	27.5	1.127	0.062	0.070
	DFT-s-OFD QPSK 100MHz 50%RB	Right Tilted	3500	26.98	27.5	1.127	0.058	0.065
	DFT-s-OFD QPSK 100MHz 50%RB	Left Cheek	3500	26.98	27.5	1.127	0.162	0.183
	DFT-s-OFD QPSK 100MHz 50%RB	Left Tilted	3500	26.98	27.5	1.127	0.157	0.177

NR DC_2A_n77A_3700-3980MHz(P1)–Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	DFT-s-OFDM QPSK 100MHz 1RB	Right Cheek	3840	27.02	27.5	1.117	0.063	0.070
	DFT-s-OFDM QPSK 100MHz 1RB	Right Tilted	3840	27.02	27.5	1.117	0.059	0.066
35.	DFT-s-OFDM QPSK 100MHz 1RB	Left Cheek	3840	27.02	27.5	1.117	0.156	0.174
	DFT-s-OFDM QPSK 100MHz 1RB	Left Tilted	3840	27.02	27.5	1.117	0.151	0.169
	DFT-s-OFDM QPSK 100MHz 50%RB	Right Cheek	3840	27.02	27.5	1.117	0.061	0.068
	DFT-s-OFDM QPSK 100MHz 50%RB	Right Tilted	3840	27.02	27.5	1.117	0.056	0.063
	DFT-s-OFDM QPSK 100MHz 50%RB	Left Cheek	3840	27.02	27.5	1.117	0.152	0.170
	DFT-s-OFDM QPSK 100MHz 50%RB	Left Tilted	3840	27.02	27.5	1.117	0.147	0.164

WLAN 5.2GHz(P2)–Head SAR Test-ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11a	Right Cheek	36	5180	13.29	13.5	1.050	0.558	0.586
	802.11a	Right Tilted	36	5180	13.29	13.5	1.050	0.534	0.560
36.	802.11a	Left Cheek	36	5180	13.29	13.5	1.050	0.273	0.287
	802.11a	Left Tilted	36	5180	13.29	13.5	1.050	0.261	0.274

WLAN 5.3GHz(P2)–Head SAR Test-ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
37.	802.11a	Right Cheek	56	5280	13.93	14.0	1.016	0.623	0.633
	802.11a	Right Tilted	56	5280	13.93	14.0	1.016	0.605	0.615
	802.11a	Left Cheek	56	5280	13.93	14.0	1.016	0.304	0.309
	802.11a	Left Tilted	56	5280	13.93	14.0	1.016	0.293	0.298

WLAN 5.6GHz(P2)–Head SAR Test-ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
38.	802.11a	Right Cheek	100	5500	13.45	13.5	1.012	0.582	0.589
	802.11a	Right Tilted	100	5500	13.45	13.5	1.012	0.561	0.567
	802.11a	Left Cheek	100	5500	13.45	13.5	1.012	0.279	0.282
	802.11a	Left Tilted	100	5500	13.45	13.5	1.012	0.254	0.257

WLAN 5.8GHz(P2)–Head SAR Test-ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
39.	802.11a	Right Cheek	165	5825	13.48	13.5	1.005	0.446	0.448
	802.11a	Right Tilted	165	5825	13.48	13.5	1.005	0.423	0.425
	802.11a	Left Cheek	165	5825	13.48	13.5	1.005	0.207	0.208
	802.11a	Left Tilted	165	5825	13.48	13.5	1.005	0.186	0.187

WLAN 2.4GHz(P2)–Head SAR Test-ANT7									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
40.	802.11b	Right Cheek	06	2437	14.41	14.5	1.021	0.164	0.167
	802.11b	Right Tilted	06	2437	14.41	14.5	1.021	0.159	0.162
	802.11b	Left Cheek	06	2437	14.41	14.5	1.021	0.067	0.068
	802.11b	Left Tilted	06	2437	14.41	14.5	1.021	0.063	0.064

Bluetooth–Head SAR Test-ANT7								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			MHz					
41.	GFSK	Right Cheek	2480	17.61	18.0	1.094	0.048	0.053
	GFSK	Right Tilted	2480	17.61	18.0	1.094	0.045	0.049
	GFSK	Left Cheek	2480	17.61	18.0	1.094	0.022	0.024
	GFSK	Left Tilted	2480	17.61	18.0	1.094	0.019	0.021

Remark: Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

Body-worn SAR

GSM850(P1) – Body SAR Test (Gap: 15mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
42.	GSM	Back	190	836.6	32.77	33.0	1.054	0.150	0.158
	GSM	Front	190	836.6	32.77	33.0	1.054	0.100	0.105

GSM1900(P1)– Body SAR Test (Gap: 15mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
43.	GSM	Back	661	1880	29.89	30.0	1.026	0.168	0.172
	GSM	Front	661	1880	29.89	30.0	1.026	0.140	0.144

WCDMA Band 2(P1) – Body SAR Test (Gap: 15mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
44.	RMC 12.2k	Back Side	9538	1907.6	22.62	23.0	1.091	0.218	0.238
	RMC 12.2k	Front Side	9538	1907.6	22.62	23.0	1.091	0.192	0.210

WCDMA Band 4(P1)– Body SAR Test (Gap: 15mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
45.	RMC 12.2k	Back Side	1312	1712.4	22.88	23.0	1.028	0.337	0.346
	RMC 12.2k	Front Side	1312	1712.4	22.88	23.0	1.028	0.172	0.177

WCDMA Band 5(P1) – Body SAR Test (Gap: 15mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
46.	RMC 12.2k	Back Side	4132	826.4	22.25	22.5	1.059	0.109	0.115
	RMC 12.2k	Front Side	4132	826.4	22.25	22.5	1.059	0.064	0.068

LTE Band 2(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
47.	QPSK 20MHz 1RB	Back Side	1900	22.84	23.0	1.038	0.331	0.343
	QPSK 20MHz 1RB	Front Side	1900	22.84	23.0	1.038	0.296	0.307
	QPSK 20MHz 50%RB	Back Side	1900	22.84	23.0	1.038	0.318	0.330
	QPSK 20MHz 50%RB	Front Side	1900	22.84	23.0	1.038	0.278	0.288

LTE Band 4(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
48.	QPSK 20MHz 1RB	Back Side	1720	23.05	23.5	1.109	0.432	0.479
	QPSK 20MHz 1RB	Front Side	1720	23.05	23.5	1.109	0.387	0.429
	QPSK 20MHz 50%RB	Back Side	1720	23.05	23.5	1.109	0.425	0.471
	QPSK 20MHz 50%RB	Front Side	1720	23.05	23.5	1.109	0.371	0.412

LTE Band 5(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
49.	QPSK 10MHz 1RB	Back Side	829	23.93	24.0	1.016	0.147	0.149
	QPSK 10MHz 1RB	Front Side	829	23.93	24.0	1.016	0.133	0.135
	QPSK 10MHz 50%RB	Back Side	829	23.93	24.0	1.016	0.135	0.137
	QPSK 10MHz 50%RB	Front Side	829	23.93	24.0	1.016	0.121	0.123

LTE Band 7(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
50.	QPSK 20MHz 1RB	Back Side	2535	22.86	23.0	1.033	0.339	0.350
	QPSK 20MHz 1RB	Front Side	2535	22.86	23.0	1.033	0.312	0.322
	QPSK 20MHz 50%RB	Back Side	2535	22.86	23.0	1.033	0.321	0.332
	QPSK 20MHz 50%RB	Front Side	2535	22.86	23.0	1.033	0.304	0.314

LTE Band 12(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
51.	QPSK 10MHz 1RB	Back Side	704	23.74	24.0	1.062	0.215	0.228
	QPSK 10MHz 1RB	Front Side	704	23.74	24.0	1.062	0.184	0.195
	QPSK 10MHz 50%RB	Back Side	704	23.74	24.0	1.062	0.206	0.219
	QPSK 10MHz 50%RB	Front Side	704	23.74	24.0	1.062	0.169	0.179

LTE Band 13(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
52.	QPSK 10MHz 1RB	Back Side	782	23.78	24.0	1.052	0.124	0.130
	QPSK 10MHz 1RB	Front Side	782	23.78	24.0	1.052	0.103	0.108
	QPSK 10MHz 50%RB	Back Side	782	23.78	24.0	1.052	0.116	0.122
	QPSK 10MHz 50%RB	Front Side	782	23.78	24.0	1.052	0.098	0.103

LTE Band 17(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
53.	QPSK 10MHz 1RB	Back Side	709	23.79	24.0	1.050	0.188	0.197
	QPSK 10MHz 1RB	Front Side	709	23.79	24.0	1.050	0.121	0.127
	QPSK 10MHz 50%RB	Back Side	709	23.79	24.0	1.050	0.179	0.188
	QPSK 10MHz 50%RB	Front Side	709	23.79	24.0	1.050	0.113	0.119

LTE Band 25(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
54.	QPSK 20MHz 1RB	Back Side	1905	22.81	23.0	1.045	0.321	0.335
	QPSK 20MHz 1RB	Front Side	1905	22.81	23.0	1.045	0.304	0.318
	QPSK 20MHz 50%RB	Back Side	1905	22.81	23.0	1.045	0.316	0.330
	QPSK 20MHz 50%RB	Front Side	1905	22.81	23.0	1.045	0.285	0.298

LTE Band 26(814-824MHz) (P1)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
55.	QPSK 10MHz 1RB	Back Side	819	24.07	24.5	1.104	0.131	0.145
	QPSK 10MHz 1RB	Front Side	819	24.07	24.5	1.104	0.121	0.134
	QPSK 10MHz 50%RB	Back Side	819	24.07	24.5	1.104	0.126	0.139
	QPSK 10MHz 50%RB	Front Side	819	24.07	24.5	1.104	0.113	0.125

LTE Band 26(824-849MHz) (P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
56.	QPSK 15MHz 1RB	Back Side	831.5	23.84	24.0	1.038	0.112	0.116
	QPSK 15MHz 1RB	Front Side	831.5	23.84	24.0	1.038	0.089	0.092
	QPSK 15MHz 50%RB	Back Side	831.5	23.84	24.0	1.038	0.105	0.109
	QPSK 15MHz 50%RB	Front Side	831.5	23.84	24.0	1.038	0.081	0.084

LTE Band 38(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
57.	QPSK 20MHz 1RB	Back Side	2595	22.32	22.5	1.042	0.165	0.172
	QPSK 20MHz 1RB	Front Side	2595	22.32	22.5	1.042	0.143	0.149
	QPSK 20MHz 50%RB	Back Side	2595	22.32	22.5	1.042	0.152	0.158
	QPSK 20MHz 50%RB	Front Side	2595	22.32	22.5	1.042	0.131	0.137

LTE Band 41(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
58.	QPSK 20MHz 1RB	Back Side	2680	22.45	23.0	1.135	0.218	0.247
	QPSK 20MHz 1RB	Front Side	2680	22.45	23.0	1.135	0.175	0.199
	QPSK 20MHz 50%RB	Back Side	2680	22.45	23.0	1.135	0.211	0.239
	QPSK 20MHz 50%RB	Front Side	2680	22.45	23.0	1.135	0.164	0.186

LTE Band 66(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
59.	QPSK 20MHz 1RB	Back Side	1720	23.25	23.5	1.059	0.408	0.432
	QPSK 20MHz 1RB	Front Side	1720	23.25	23.5	1.059	0.354	0.375
	QPSK 20MHz 50%RB	Back Side	1720	23.25	23.5	1.059	0.387	0.410
	QPSK 20MHz 50%RB	Front Side	1720	23.25	23.5	1.059	0.339	0.359

LTE Band 71(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
60.	QPSK 20MHz 1RB	Back Side	688	23.67	24.0	1.079	0.174	0.188
	QPSK 20MHz 1RB	Front Side	688	23.67	24.0	1.079	0.135	0.146
	QPSK 20MHz 50%RB	Back Side	688	23.67	24.0	1.079	0.166	0.179
	QPSK 20MHz 50%RB	Front Side	688	23.67	24.0	1.079	0.128	0.138

NR n2(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
61.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	1860	22.59	23.0	1.099	0.190	0.209
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	1860	22.59	23.0	1.099	0.115	0.126
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	1860	22.59	23.0	1.099	0.176	0.193
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	1860	22.59	23.0	1.099	0.106	0.116

NR n5(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
62.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	834	24.83	25.0	1.040	0.082	0.085
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	834	24.83	25.0	1.040	0.054	0.056
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	834	24.83	25.0	1.040	0.076	0.079
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	834	24.83	25.0	1.040	0.048	0.050

NR n25(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
63.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	1860	22.45	22.5	1.012	0.205	0.207
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	1860	22.45	22.5	1.012	0.120	0.121
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	1860	22.45	22.5	1.012	0.189	0.191
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	1860	22.45	22.5	1.012	0.116	0.117

NR n41(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
64.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	2546	25.96	26.0	1.009	0.051	0.051
	DFT-s-OFDM QPSK 100MHz 1RB	Front Side	2546	25.96	26.0	1.009	0.036	0.036
	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	2546	25.96	26.0	1.009	0.048	0.048
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	2546	25.96	26.0	1.009	0.030	0.030

NR n66(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
65.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	1720	23.75	24.0	1.059	0.256	0.271
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	1720	23.75	24.0	1.059	0.189	0.200
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	1720	23.75	24.0	1.059	0.238	0.252
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	1720	23.75	24.0	1.059	0.165	0.175

NR n71(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
66.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	688	24.89	25.0	1.026	0.077	0.079
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	688	24.89	25.0	1.026	0.059	0.061
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	688	24.89	25.0	1.026	0.068	0.070
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	688	24.89	25.0	1.026	0.046	0.047

NR n77_3450-3550MHz(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
67.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	3500	26.47	27.0	1.130	0.033	0.037
	DFT-s-OFDM QPSK K 100MHz 1RB	Front Side	3500	26.47	27.0	1.130	0.031	0.035
	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	3500	26.47	27.0	1.130	0.031	0.035
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	3500	26.47	27.0	1.130	0.029	0.033

NR n77_3700-3980MHz(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
68.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	3750	26.92	27.0	1.019	0.016	0.016
	DFT-s-OFDM QPSK 100MHz 1RB	Front Side	3750	26.92	27.0	1.019	0.015	0.015
	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	3750	26.92	27.0	1.019	0.015	0.015
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	3750	26.92	27.0	1.019	0.013	0.013

NR DC_7A_n2A(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
69.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	1860	23.24	23.5	1.062	0.168	0.178
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	1860	23.24	23.5	1.062	0.122	0.130
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	1860	23.24	23.5	1.062	0.156	0.166
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	1860	23.24	23.5	1.062	0.106	0.113

NR DC_66A_n5A(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
70.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	839	23.61	24.0	1.094	0.073	0.080
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	839	23.61	24.0	1.094	0.045	0.049
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	839	23.61	24.0	1.094	0.068	0.074
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	839	23.61	24.0	1.094	0.032	0.035

NR DC_4A_n41AP1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
71.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	2640	25.86	26.0	1.033	0.045	0.046
	DFT-s-OFDM QPSK 100MHz 1RB	Front Side	2640	25.86	26.0	1.033	0.038	0.039
	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	2640	25.86	26.0	1.033	0.040	0.041
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	2640	25.86	26.0	1.033	0.034	0.035

NR DC_5A_n66A(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
72.	DFT-s-OFDM QPSK 200MHz 1RB	Back Side	1720	23.88	24.0	1.028	0.238	0.245
	DFT-s-OFDM QPSK 200MHz 1RB	Front Side	1720	23.88	24.0	1.028	0.198	0.204
	DFT-s-OFDM QPSK 200MHz 50%RB	Back Side	1720	23.88	24.0	1.028	0.216	0.222
	DFT-s-OFDM QPSK 200MHz 50%RB	Front Side	1720	23.88	24.0	1.028	0.165	0.170

NR DC_2A_n77A_3450-3550MHz(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
73.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	3500	26.98	27.5	1.127	0.033	0.037
	DFT-s-OFDM QPSK K 100MHz 1RB	Front Side	3500	26.98	27.5	1.127	0.028	0.032
	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	3500	26.98	27.5	1.127	0.031	0.035
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	3500	26.98	27.5	1.127	0.026	0.029

NR DC_2A_n77A_3700-3980MHz(P1)–Body SAR Test (Gap: 15mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
74.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	3840	27.02	27.5	1.117	0.011	0.012
	DFT-s-OFDM QPSK 100MHz 1RB	Front Side	3840	27.02	27.5	1.117	0.010	0.011
	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	3840	27.02	27.5	1.117	0.010	0.011
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	3840	27.02	27.5	1.117	0.008	0.009

WLAN 5.2GHz(P1) –Body SAR Test (Gap: 15mm)-ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
75.	802.11a	Back Side	CH 48	5240	14.60	15.0	1.096	0.267	0.293
	802.11a	Front Side	CH 48	5240	14.60	15.0	1.096	0.193	0.212

WLAN 5.3GHz(P1) –Body SAR Test (Gap: 15mm) -ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
76.	802.11a	Back Side	CH 52	5260	14.75	15.0	1.059	0.251	0.266
	802.11a	Front Side	CH 52	5260	14.75	15.0	1.059	0.179	0.190

WLAN 5.6GHz (P1)–Body SAR Test (Gap: 15mm) -ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
77.	802.11a	Back Side	100	5500	14.42	14.5	1.019	0.231	0.235
	802.11a	Front Side	100	5500	14.42	14.5	1.019	0.167	0.170

WLAN 5.8GHz(P1) –Body SAR Test (Gap: 15mm) -ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
78.	802.11a	Back Side	165	5825	14.80	15.0	1.047	0.227	0.238
	802.11a	Front Side	165	5825	14.80	15.0	1.047	0.158	0.165

WLAN 2.4GHz(P1) –Body SAR Test (Gap: 15mm) –ANT7									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
79.	802.11b	Back Side	CH 01	2412	18.86	19.0	1.033	0.066	0.068
	802.11b	Front Side	CH 01	2412	18.86	19.0	1.033	0.045	0.046

Bluetooth –Body SAR Test(Gap: 15mm) –ANT7								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			MHz					
80.	GFSK	Back Side	2480	17.61	18.0	1.094	0.011	0.012
	GFSK	Front Side	2480	17.61	18.0	1.094	0.007	0.008

Hotspot SAR

GSM850(P1) – Body SAR Test (Gap: 10mm)									
Plo t No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
81.	GPRS_2TX	Back Side	190	836.6	31.87	32.0	1.030	0.422	0.435
	GPRS_2TX	Front Side	190	836.6	31.87	32.0	1.030	0.248	0.256
	GPRS_2TX	Right side	190	836.6	31.87	32.0	1.030	0.147	0.151
	GPRS_2TX	Left side	190	836.6	31.87	32.0	1.030	0.021	0.022
	GPRS_2TX	Bottom side	190	836.6	31.87	32.0	1.030	0.282	0.291

GSM1900(P3) – Body SAR Test (Gap: 10mm)									
Plo t No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
82.	GPRS_4TX	Back Side	810	1909.8	21.55	22.0	1.109	0.389	0.431
	GPRS_4TX	Front Side	810	1909.8	21.55	22.0	1.109	0.293	0.325
	GPRS_4TX	Right side	810	1909.8	21.55	22.0	1.109	0.227	0.252
	GPRS_4TX	Left side	810	1909.8	21.55	22.0	1.109	0.075	0.083
	GPRS_4TX	Bottom side	810	1909.8	21.55	22.0	1.109	0.306	0.339

WCDMA Band 2(P3) – Body SAR Test (Gap: 10mm)									
Plo t No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
83.	RMC 12.2k	Back Side	9400	1880.0	19.65	20.0	1.084	0.405	0.439
	RMC 12.2k	Front Side	9400	1880.0	19.65	20.0	1.084	0.257	0.279
	RMC 12.2k	Right side	9400	1880.0	19.65	20.0	1.084	0.186	0.202
	RMC 12.2k	Left side	9400	1880.0	19.65	20.0	1.084	0.087	0.094
	RMC 12.2k	Bottom side	9400	1880.0	19.65	20.0	1.084	0.286	0.310

WCDMA Band 4(P3) – Body SAR Test (Gap: 10mm)									
Plo t No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
84.	RMC 12.2k	Back Side	1513	1752.6	19.87	20.0	1.030	0.486	0.501
	RMC 12.2k	Front Side	1513	1752.6	19.87	20.0	1.030	0.284	0.293
	RMC 12.2k	Right side	1513	1752.6	19.87	20.0	1.030	0.182	0.188
	RMC 12.2k	Left side	1513	1752.6	19.87	20.0	1.030	0.103	0.106
	RMC 12.2k	Bottom side	1513	1752.6	19.87	20.0	1.030	0.328	0.338

WCDMA Band 5(P1) – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
85.	RMC 12.2k	Back Side	4132	826.4	22.25	22.5	1.059	0.210	0.222
	RMC 12.2k	Front Side	4132	826.4	22.25	22.5	1.059	0.071	0.075
	RMC 12.2k	Right side	4132	826.4	22.25	22.5	1.059	0.065	0.069
	RMC 12.2k	Left side	4132	826.4	22.25	22.5	1.059	0.105	0.111
	RMC 12.2k	Bottom side	4132	826.4	22.25	22.5	1.059	0.134	0.142

LTE Band 2(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
86.	QPSK 20MHz 1RB	Back Side	1900	20.70	21.0	1.072	0.597	0.640
	QPSK 20MHz 1RB	Front Side	1900	20.70	21.0	1.072	0.456	0.489
	QPSK 20MHz 1RB	Right side	1900	20.70	21.0	1.072	0.324	0.347
	QPSK 20MHz 1RB	Left side	1900	20.70	21.0	1.072	0.112	0.120
	QPSK 20MHz 1RB	Bottom side	1900	20.70	21.0	1.072	0.268	0.287
	QPSK 20MHz 50%RB	Back Side	1900	20.70	21.0	1.072	0.575	0.616
	QPSK 20MHz 50%RB	Front Side	1900	20.70	21.0	1.072	0.423	0.453
	QPSK 20MHz 50%RB	Right side	1900	20.70	21.0	1.072	0.309	0.331
	QPSK 20MHz 50%RB	Left side	1900	20.70	21.0	1.072	0.108	0.116
	QPSK 20MHz 50%RB	Bottom side	1900	20.70	21.0	1.072	0.241	0.258

LTE Band 4(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
87.	QPSK 20MHz 1RB	Back Side	1720	20.07	20.5	1.104	0.630	0.696
	QPSK 20MHz 1RB	Front Side	1720	20.07	20.5	1.104	0.494	0.545
	QPSK 20MHz 1RB	Right side	1720	20.07	20.5	1.104	0.354	0.391
	QPSK 20MHz 1RB	Left side	1720	20.07	20.5	1.104	0.164	0.181
	QPSK 20MHz 1RB	Bottom side	1720	20.07	20.5	1.104	0.302	0.333
	QPSK 20MHz 50%RB	Back Side	1720	20.07	20.5	1.104	0.603	0.666
	QPSK 20MHz 50%RB	Front Side	1720	20.07	20.5	1.104	0.471	0.520
	QPSK 20MHz 50%RB	Right side	1720	20.07	20.5	1.104	0.312	0.344
	QPSK 20MHz 50%RB	Left side	1720	20.07	20.5	1.104	0.142	0.157
	QPSK 20MHz 50%RB	Bottom side	1720	20.07	20.5	1.104	0.293	0.323

LTE Band 5(P1)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
88.	QPSK 10MHz 1RB	Back Side	829	23.93	24.0	1.016	0.262	0.266
	QPSK 10MHz 1RB	Front Side	829	23.93	24.0	1.016	0.130	0.132
	QPSK 10MHz 1RB	Right side	829	23.93	24.0	1.016	0.087	0.088
	QPSK 10MHz 1RB	Left side	829	23.93	24.0	1.016	0.102	0.104
	QPSK 10MHz 1RB	Bottom side	829	23.93	24.0	1.016	0.113	0.115
	QPSK 10MHz 50%RB	Back Side	829	23.93	24.0	1.016	0.256	0.260
	QPSK 10MHz 50%RB	Front Side	829	23.93	24.0	1.016	0.121	0.123
	QPSK 10MHz 50%RB	Right side	829	23.93	24.0	1.016	0.081	0.082
	QPSK 10MHz 50%RB	Left side	829	23.93	24.0	1.016	0.096	0.098
	QPSK 10MHz 50%RB	Bottom side	829	23.93	24.0	1.016	0.106	0.108

LTE Band 7(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
89.	QPSK 20MHz 1RB	Back Side	2535	20.96	21.0	1.009	0.405	0.409
	QPSK 20MHz 1RB	Front Side	2535	20.96	21.0	1.009	0.284	0.287
	QPSK 20MHz 1RB	Right side	2535	20.96	21.0	1.009	0.102	0.103
	QPSK 20MHz 1RB	Left side	2535	20.96	21.0	1.009	0.256	0.258
	QPSK 20MHz 1RB	Bottom side	2535	20.96	21.0	1.009	0.323	0.326
	QPSK 20MHz 50%RB	Back Side	2535	20.96	21.0	1.009	0.382	0.386
	QPSK 20MHz 50%RB	Front Side	2535	20.96	21.0	1.009	0.271	0.274
	QPSK 20MHz 50%RB	Right side	2535	20.96	21.0	1.009	0.096	0.097
	QPSK 20MHz 50%RB	Left side	2535	20.96	21.0	1.009	0.231	0.233
	QPSK 20MHz 50%RB	Bottom side	2535	20.96	21.0	1.009	0.298	0.301

LTE Band 12(P1)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
90.	QPSK 10MHz 1RB	Back Side	704	23.74	24.0	1.062	0.245	0.260
	QPSK 10MHz 1RB	Front Side	704	23.74	24.0	1.062	0.164	0.174
	QPSK 10MHz 1RB	Right side	704	23.74	24.0	1.062	0.096	0.102
	QPSK 10MHz 1RB	Left side	704	23.74	24.0	1.062	0.119	0.126
	QPSK 10MHz 1RB	Bottom side	704	23.74	24.0	1.062	0.185	0.196
	QPSK 10MHz 50%RB	Back Side	704	23.74	24.0	1.062	0.234	0.248
	QPSK 10MHz 50%RB	Front Side	704	23.74	24.0	1.062	0.159	0.169
	QPSK 10MHz 50%RB	Right side	704	23.74	24.0	1.062	0.092	0.098
	QPSK 10MHz 50%RB	Left side	704	23.74	24.0	1.062	0.111	0.118
	QPSK 10MHz 50%RB	Bottom side	704	23.74	24.0	1.062	0.176	0.187

LTE Band 13(P1)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
91.	QPSK 10MHz 1RB	Back Side	782	23.78	24.0	1.052	0.206	0.217
	QPSK 10MHz 1RB	Front Side	782	23.78	24.0	1.052	0.122	0.128
	QPSK 10MHz 1RB	Right side	782	23.78	24.0	1.052	0.085	0.089
	QPSK 10MHz 1RB	Left side	782	23.78	24.0	1.052	0.096	0.101
	QPSK 10MHz 1RB	Bottom side	782	23.78	24.0	1.052	0.143	0.150
	QPSK 10MHz 50%RB	Back Side	782	23.78	24.0	1.052	0.199	0.209
	QPSK 10MHz 50%RB	Front Side	782	23.78	24.0	1.052	0.115	0.121
	QPSK 10MHz 50%RB	Right side	782	23.78	24.0	1.052	0.081	0.085
	QPSK 10MHz 50%RB	Left side	782	23.78	24.0	1.052	0.092	0.097
	QPSK 10MHz 50%RB	Bottom side	782	23.78	24.0	1.052	0.136	0.143

LTE Band 17(P1)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
92.	QPSK 10MHz 1RB	Back Side	709	23.79	24.0	1.050	0.209	0.219
	QPSK 10MHz 1RB	Front Side	709	23.79	24.0	1.050	0.140	0.147
	QPSK 10MHz 1RB	Right side	709	23.79	24.0	1.050	0.097	0.102
	QPSK 10MHz 1RB	Left side	709	23.79	24.0	1.050	0.113	0.119
	QPSK 10MHz 1RB	Bottom side	709	23.79	24.0	1.050	0.164	0.172
	QPSK 10MHz 50%RB	Back Side	709	23.79	24.0	1.050	0.201	0.211
	QPSK 10MHz 50%RB	Front Side	709	23.79	24.0	1.050	0.135	0.142
	QPSK 10MHz 50%RB	Right side	709	23.79	24.0	1.050	0.092	0.097
	QPSK 10MHz 50%RB	Left side	709	23.79	24.0	1.050	0.108	0.113
	QPSK 10MHz 50%RB	Bottom side	709	23.79	24.0	1.050	0.153	0.161

LTE Band 25(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
93.	QPSK 20MHz 1RB	Back Side	1905	18.79	19.0	1.050	0.599	0.629
	QPSK 20MHz 1RB	Front Side	1905	18.79	19.0	1.050	0.447	0.469
	QPSK 20MHz 1RB	Right side	1905	18.79	19.0	1.050	0.262	0.275
	QPSK 20MHz 1RB	Left side	1905	18.79	19.0	1.050	0.312	0.327
	QPSK 20MHz 1RB	Bottom side	1905	18.79	19.0	1.050	0.401	0.421
	QPSK 20MHz 50%RB	Back Side	1905	18.79	19.0	1.050	0.575	0.603
	QPSK 20MHz 50%RB	Front Side	1905	18.79	19.0	1.050	0.421	0.442
	QPSK 20MHz 50%RB	Right side	1905	18.79	19.0	1.050	0.247	0.259
	QPSK 20MHz 50%RB	Left side	1905	18.79	19.0	1.050	0.298	0.313
	QPSK 20MHz 50%RB	Bottom side	1905	18.79	19.0	1.050	0.387	0.406

LTE Band 26(814-824MHz) (P1)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
94.	QPSK 10MHz 1RB	Back Side	819	24.07	24.5	1.104	0.209	0.231
	QPSK 10MHz 1RB	Front Side	819	24.07	24.5	1.104	0.137	0.151
	QPSK 10MHz 1RB	Right side	819	24.07	24.5	1.104	0.062	0.068
	QPSK 10MHz 1RB	Left side	819	24.07	24.5	1.104	0.096	0.106
	QPSK 10MHz 1RB	Bottom side	819	24.07	24.5	1.104	0.146	0.161
	QPSK 10MHz 50%RB	Back Side	819	24.07	24.5	1.104	0.201	0.222
	QPSK 10MHz 50%RB	Front Side	819	24.07	24.5	1.104	0.109	0.120
	QPSK 10MHz 50%RB	Right side	819	24.07	24.5	1.104	0.058	0.064
	QPSK 10MHz 50%RB	Left side	819	24.07	24.5	1.104	0.093	0.103
	QPSK 10MHz 50%RB	Bottom side	819	24.07	24.5	1.104	0.142	0.157

LTE Band 26(824-849MHz) (P1)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
95.	QPSK 15MHz 1RB	Back Side	831.5	23.84	24.0	1.038	0.226	0.234
	QPSK 15MHz 1RB	Front Side	831.5	23.84	24.0	1.038	0.104	0.108
	QPSK 15MHz 1RB	Right side	831.5	23.84	24.0	1.038	0.074	0.077
	QPSK 15MHz 1RB	Left side	831.5	23.84	24.0	1.038	0.103	0.107
	QPSK 15MHz 1RB	Bottom side	831.5	23.84	24.0	1.038	0.154	0.160
	QPSK 15MHz 50%RB	Back Side	831.5	23.84	24.0	1.038	0.218	0.226
	QPSK 15MHz 50%RB	Front Side	831.5	23.84	24.0	1.038	0.096	0.100
	QPSK 15MHz 50%RB	Right side	831.5	23.84	24.0	1.038	0.071	0.074
	QPSK 15MHz 50%RB	Left side	831.5	23.84	24.0	1.038	0.099	0.103
	QPSK 15MHz 50%RB	Bottom side	831.5	23.84	24.0	1.038	0.147	0.153

LTE Band 38(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
96.	QPSK 20MHz 1RB	Back Side	2610	20.15	20.5	1.084	0.329	0.357
	QPSK 20MHz 1RB	Front Side	2610	20.15	20.5	1.084	0.286	0.310
	QPSK 20MHz 1RB	Left side	2610	20.15	20.5	1.084	0.213	0.231
	QPSK 20MHz 1RB	Bottom side	2610	20.15	20.5	1.084	0.254	0.275
	QPSK 20MHz 50%RB	Back Side	2610	20.15	20.5	1.084	0.327	0.354
	QPSK 20MHz 50%RB	Front Side	2610	20.15	20.5	1.084	0.272	0.295
	QPSK 20MHz 50%RB	Left side	2610	20.15	20.5	1.084	0.202	0.219
	QPSK 20MHz 50%RB	Bottom side	2610	20.15	20.5	1.084	0.234	0.254

LTE Band 41(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
97.	QPSK 20MHz 1RB	Back Side	2680	20.99	21.0	1.002	0.431	0.432
	QPSK 20MHz 1RB	Front Side	2680	20.99	21.0	1.002	0.375	0.376
	QPSK 20MHz 1RB	Left side	2680	20.99	21.0	1.002	0.265	0.266
	QPSK 20MHz 1RB	Bottom side	2680	20.99	21.0	1.002	0.207	0.207
	QPSK 20MHz 50%RB	Back Side	2680	20.99	21.0	1.002	0.419	0.420
	QPSK 20MHz 50%RB	Front Side	2680	20.99	21.0	1.002	0.362	0.363
	QPSK 20MHz 50%RB	Left side	2680	20.99	21.0	1.002	0.243	0.244
	QPSK 20MHz 50%RB	Bottom side	2680	20.99	21.0	1.002	0.186	0.186

LTE Band 66(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
98.	QPSK 20MHz 1RB	Back Side	1720	19.15	19.5	1.084	0.669	0.725
	QPSK 20MHz 1RB	Front Side	1720	19.15	19.5	1.084	0.501	0.543
	QPSK 20MHz 1RB	Right side	1720	19.15	19.5	1.084	0.372	0.403
	QPSK 20MHz 1RB	Left side	1720	19.15	19.5	1.084	0.185	0.201
	QPSK 20MHz 1RB	Bottom side	1720	19.15	19.5	1.084	0.314	0.340
	QPSK 20MHz 50%RB	Back Side	1720	19.15	19.5	1.084	0.641	0.695
	QPSK 20MHz 50%RB	Front Side	1720	19.15	19.5	1.084	0.482	0.522
	QPSK 20MHz 50%RB	Right side	1720	19.15	19.5	1.084	0.341	0.370
	QPSK 20MHz 50%RB	Left side	1720	19.15	19.5	1.084	0.168	0.182
	QPSK 20MHz 50%RB	Bottom side	1720	19.15	19.5	1.084	0.317	0.344

LTE Band 71(P1)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
99.	QPSK 20MHz 1RB	Back Side	688	23.67	24.0	1.079	0.186	0.201
	QPSK 20MHz 1RB	Front Side	688	23.67	24.0	1.079	0.140	0.151
	QPSK 20MHz 1RB	Right side	688	23.67	24.0	1.079	0.077	0.083
	QPSK 20MHz 1RB	Left side	688	23.67	24.0	1.079	0.097	0.105
	QPSK 20MHz 1RB	Bottom side	688	23.67	24.0	1.079	0.152	0.164
	QPSK 20MHz 50%RB	Back Side	688	23.67	24.0	1.079	0.181	0.195
	QPSK 20MHz 50%RB	Front Side	688	23.67	24.0	1.079	0.135	0.146
	QPSK 20MHz 50%RB	Right side	688	23.67	24.0	1.079	0.074	0.080
	QPSK 20MHz 50%RB	Left side	688	23.67	24.0	1.079	0.092	0.099
	QPSK 20MHz 50%RB	Bottom side	688	23.67	24.0	1.079	0.147	0.159

NR n2(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
100.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	1880	20.92	21.0	1.019	0.388	0.395
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	1880	20.92	21.0	1.019	0.234	0.238
	DFT-s-OFDM QPSK 20MHz 1RB	Right Side	1880	20.92	21.0	1.019	0.152	0.155
	DFT-s-OFDM QPSK 20MHz 1RB	Left Side	1880	20.92	21.0	1.019	0.168	0.171
	DFT-s-OFDM QPSK 20MHz 1RB	Top Side	1880	20.92	21.0	1.019	0.255	0.260
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	1880	20.92	21.0	1.019	0.376	0.383
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	1880	20.92	21.0	1.019	0.214	0.218
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Side	1880	20.92	21.0	1.019	0.130	0.132
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Side	1880	20.92	21.0	1.019	0.153	0.156
	DFT-s-OFDM QPSK 20MHz 50%RB	Top Side	1880	20.92	21.0	1.019	0.241	0.245

NR n5(P1)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
101.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	834	24.83	25.0	1.040	0.170	0.177
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	834	24.83	25.0	1.040	0.142	0.148
	DFT-s-OFDM QPSK 20MHz 1RB	Right side	834	24.83	25.0	1.040	0.125	0.130
	DFT-s-OFDM QPSK 20MHz 1RB	Left side	834	24.83	25.0	1.040	0.113	0.118
	DFT-s-OFDM QPSK 20MHz 50%RB	Bottom side	834	24.83	25.0	1.040	0.151	0.157
	DFT-s-OFDM QPSK 20MHz	Back Side	834	24.83	25.0	1.040	0.167	0.174

	50%RB							
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	834	24.83	25.0	1.040	0.133	0.138
	DFT-s-OFDM QPSK 20MHz 50%RB	Right side	834	24.83	25.0	1.040	0.120	0.125
	DFT-s-OFDM QPSK 20MHz 50%RB	Left side	834	24.83	25.0	1.040	0.106	0.110
	DFT-s-OFDM QPSK 20MHz 50%RB	Bottom side	834	24.83	25.0	1.040	0.145	0.151

NR n25(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
102.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	1882.5	20.89	21.0	1.026	0.402	0.412
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	1882.5	20.89	21.0	1.026	0.356	0.365
	DFT-s-OFDM QPSK 20MHz 1RB	Right Side	1882.5	20.89	21.0	1.026	0.189	0.194
	DFT-s-OFDM QPSK 20MHz 1RB	Left Side	1882.5	20.89	21.0	1.026	0.223	0.229
	DFT-s-OFDM QPSK 20MHz 1RB	Top Side	1882.5	20.89	21.0	1.026	0.387	0.397
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	1882.5	20.89	21.0	1.026	0.399	0.409
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	1882.5	20.89	21.0	1.026	0.324	0.332
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Side	1882.5	20.89	21.0	1.026	0.172	0.176
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Side	1882.5	20.89	21.0	1.026	0.203	0.208
	DFT-s-OFDM QPSK 20MHz 50%RB	Top Side	1882.5	20.89	21.0	1.026	0.367	0.376

NR n41(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
103.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	2650	22.10	22.5	1.096	0.109	0.120
	DFT-s-OFDM QPSK 100MHz 1RB	Front Side	2650	22.10	22.5	1.096	0.076	0.083
	DFT-s-OFDM QPSK 100MHz 1RB	Left Side	2650	22.10	22.5	1.096	0.081	0.089
	DFT-s-OFDM QPSK 100MHz 1RB	Bottom Side	2650	22.10	22.5	1.096	0.086	0.094
	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	2650	22.10	22.5	1.096	0.099	0.109
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	2650	22.10	22.5	1.096	0.068	0.075
	DFT-s-OFDM QPSK 100MHz 50%RB	Left Side	2650	22.10	22.5	1.096	0.079	0.087
	DFT-s-OFDM QPSK 100MHz 50%RB	Bottom Side	2650	22.10	22.5	1.096	0.082	0.090

NR n66(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
104.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	1745	20.81	21.0	1.045	0.423	0.442
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	1745	20.81	21.0	1.045	0.236	0.247
	DFT-s-OFDM QPSK 20MHz 1RB	Right Side	1745	20.81	21.0	1.045	0.123	0.129
	DFT-s-OFDM QPSK 20MHz 1RB	Left Side	1745	20.81	21.0	1.045	0.142	0.148
	DFT-s-OFDM QPSK 20MHz 1RB	Top Side	1745	20.81	21.0	1.045	0.315	0.329
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	1745	20.81	21.0	1.045	0.399	0.417
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	1745	20.81	21.0	1.045	0.210	0.219

	DFT-s-OFDM QPSK 20MHz 50%RB	Right Side	1745	20.81	21.0	1.045	0.112	0.117
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Side	1745	20.81	21.0	1.045	0.130	0.136
	DFT-s-OFDM QPSK 20MHz 50%RB	Top Side	1745	20.81	21.0	1.045	0.301	0.314

NR n71(P1)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1 g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
105.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	688	24.89	25.0	1.026	0.087	0.089
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	688	24.89	25.0	1.026	0.076	0.078
	DFT-s-OFDM QPSK 20MHz 1RB	Right side	688	24.89	25.0	1.026	0.062	0.064
	DFT-s-OFDM QPSK K 20MHz 1RB	Left side	688	24.89	25.0	1.026	0.056	0.057
	DFT-s-OFDM QPSK 20MHz 1RB	Bottom side	688	24.89	25.0	1.026	0.080	0.082
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	688	24.89	25.0	1.026	0.083	0.085
	DFT-s-OFDM QPSK K 20MHz 50%RB	Front Side	688	24.89	25.0	1.026	0.074	0.076
	DFT-s-OFDM QPSK 20MHz 50%RB	Right side	688	24.89	25.0	1.026	0.058	0.059
	DFT-s-OFDM QPSK 20MHz 50%RB	Left side	688	24.89	25.0	1.026	0.050	0.051
	DFT-s-OFDM QPSK 20MHz 50%RB	Bottom side	688	24.89	25.0	1.026	0.078	0.080

NR n77_3450-3550MHz(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
106.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	3500	21.48	22.0	1.127	0.032	0.036
	DFT-s-OFDM QPSK 100MHz 1RB	Front Side	3500	21.48	22.0	1.127	0.029	0.033
	DFT-s-OFDM QPSK 100MHz 1RB	Right Side	3500	21.48	22.0	1.127	0.018	0.020
	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	3500	21.48	22.0	1.127	0.031	0.035
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	3500	21.48	22.0	1.127	0.027	0.030
	DFT-s-OFDM QPSK 100MHz 50%RB	Right side	3500	21.48	22.0	1.127	0.016	0.018

NR n77_3700-3980MHz(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
107.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	3750	21.69	22.0	1.074	0.035	0.038
	DFT-s-OFDM QPSK 100MHz 1RB	Front Side	3750	21.69	22.0	1.074	0.031	0.033
	DFT-s-OFDM QPSK 100MHz 1RB	Right side	3750	21.69	22.0	1.074	0.017	0.018
	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	3750	21.69	22.0	1.074	0.033	0.035
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	3750	21.69	22.0	1.074	0.029	0.031
	DFT-s-OFDM QPSK 100MHz 50%RB	Right side	3750	21.69	22.0	1.074	0.015	0.016

NR DC 7A_n2A(P1)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
108.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	1860	23.24	23.5	1.062	0.344	0.365
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	1860	23.24	23.5	1.062	0.216	0.229
	DFT-s-OFDM QPSK 20MHz 1RB	Right side	1860	23.24	23.5	1.062	0.122	0.130
	DFT-s-OFDM QPSK 20MHz 1RB	Left side	1860	23.24	23.5	1.062	0.203	0.216
	DFT-s-OFDM QPSK 20MHz 1RB	Top Side	1860	23.24	23.5	1.062	0.278	0.295
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	1860	23.24	23.5	1.062	0.332	0.352
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	1860	23.24	23.5	1.062	0.210	0.223
	DFT-s-OFDM QPSK 20MHz 50%RB	Right side	1860	23.24	23.5	1.062	0.118	0.125
	DFT-s-OFDM QPSK 20MHz 50%RB	Left side	1860	23.24	23.5	1.062	0.198	0.210
	DFT-s-OFDM QPSK 20MHz 50%RB	Top Side	1860	23.24	23.5	1.062	0.267	0.283

NR DC 66A_n5A(P1)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
109.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	839	23.61	24.0	1.094	0.151	0.165
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	839	23.61	24.0	1.094	0.123	0.135
	DFT-s-OFDM QPSK 20MHz 1RB	Right side	839	23.61	24.0	1.094	0.116	0.127
	DFT-s-OFDM QPSK 20MHz 1RB	Left side	839	23.61	24.0	1.094	0.103	0.113
	DFT-s-OFDM QPSK 20MHz 50%RB	Bottom side	839	23.61	24.0	1.094	0.131	0.143
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	839	23.61	24.0	1.094	0.142	0.155
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	839	23.61	24.0	1.094	0.112	0.123
	DFT-s-OFDM QPSK 20MHz 50%RB	Right side	839	23.61	24.0	1.094	0.108	0.118
	DFT-s-OFDM QPSK 20MHz 50%RB	Left side	839	23.61	24.0	1.094	0.099	0.108
	DFT-s-OFDM QPSK 20MHz 50%RB	Bottom side	839	23.61	24.0	1.094	0.128	0.140

NR DC 4A_n41A(P1)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
110.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	2640	25.86	26.0	1.033	0.096	0.099
	DFT-s-OFDM QPSK 100MHz 1RB	Front Side	2640	25.86	26.0	1.033	0.073	0.075
	DFT-s-OFDM QPSK 100MHz 1RB	Left Side	2640	25.86	26.0	1.033	0.080	0.083
	DFT-s-OFDM QPSK 100MHz 1RB	Bottom Side	2640	25.86	26.0	1.033	0.082	0.085
	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	2640	25.86	26.0	1.033	0.092	0.095
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	2640	25.86	26.0	1.033	0.068	0.070
	DFT-s-OFDM QPSK 100MHz 50%RB	Left Side	2640	25.86	26.0	1.033	0.075	0.077
	DFT-s-OFDM QPSK 100MHz 50%RB	Bottom Side	2640	25.86	26.0	1.033	0.077	0.080

NR DC 5A_n66A(P1)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
111.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	1720	23.88	24.0	1.028	0.393	0.404
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	1720	23.88	24.0	1.028	0.219	0.225
	DFT-s-OFDM QPSK 20MHz 1RB	Right Side	1720	23.88	24.0	1.028	0.135	0.139
	DFT-s-OFDM QPSK 20MHz 1RB	Left Side	1720	23.88	24.0	1.028	0.143	0.147
	DFT-s-OFDM QPSK 20MHz 1RB	Top Side	1720	23.88	24.0	1.028	0.354	0.364
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	1720	23.88	24.0	1.028	0.378	0.389
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	1720	23.88	24.0	1.028	0.216	0.222
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Side	1720	23.88	24.0	1.028	0.129	0.133
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Side	1720	23.88	24.0	1.028	0.152	0.156
	DFT-s-OFDM QPSK 20MHz 50%RB	Top Side	1720	23.88	24.0	1.028	0.344	0.354

NR DC 2A_n77A_3450-3550MHz(P1)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
112.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	3500	26.98	27.5	1.127	0.033	0.037
	DFT-s-OFDM QPSK 100MHz 1RB	Front Side	3500	26.98	27.5	1.127	0.029	0.033
	DFT-s-OFDM QPSK 100MHz 1RB	Right side	3500	26.98	27.5	1.127	0.020	0.023
	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	3500	26.98	27.5	1.127	0.031	0.035
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	3500	26.98	27.5	1.127	0.028	0.032
	DFT-s-OFDM QPSK 100MHz 50%RB	Right side	3500	26.98	27.5	1.127	0.018	0.020

NR DC 2A_n77A_3700-3980MHz(P1)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
113.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	3840	27.02	27.5	1.117	0.032	0.036
	DFT-s-OFDM QPSK 100MHz 1RB	Front Side	3840	27.02	27.5	1.117	0.030	0.034
	DFT-s-OFDM QPSK 100MHz 1RB	Right side	3840	27.02	27.5	1.117	0.019	0.021
	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	3840	27.02	27.5	1.117	0.031	0.035
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	3840	27.02	27.5	1.117	0.028	0.031
	DFT-s-OFDM QPSK 100MHz 50%RB	Right side	3840	27.02	27.5	1.117	0.017	0.019

WLAN 5.2GHz(P1) –Body SAR Test(10mm) –ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11a	Back Side	CH 48	5240	14.60	15.0	1.096	0.341	0.374
	802.11a	Front Side	CH 48	5240	14.60	15.0	1.096	0.259	0.284
	802.11a	Left side	CH 48	5240	14.60	15.0	1.096	0.234	0.257
114.	802.11a	Top side	CH 48	5240	14.60	15.0	1.096	0.425	0.466

WLAN 5.8GHz (P1)–Body SAR Test(10mm) –ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11a	Back Side	165	5825	14.80	15.0	1.047	0.298	0.312
	802.11a	Front Side	165	5825	14.80	15.0	1.047	0.199	0.208
	802.11a	Left side	165	5825	14.80	15.0	1.047	0.188	0.197
115.	802.11a	Top side	165	5825	14.80	15.0	1.047	0.383	0.401

WLAN 2.4GHz(P1) –Body SAR Test(10mm)-ANT7									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
116.	802.11b	Back Side	CH 01	2412	18.86	19.0	1.033	0.117	0.121
	802.11b	Front Side	CH 01	2412	18.86	19.0	1.033	0.069	0.071
	802.11b	Left side	CH 01	2412	18.86	19.0	1.033	0.135	0.139
	802.11b	Top side	CH 01	2412	18.86	19.0	1.033	0.028	0.029

Bluetooth –Body SAR Test(10mm))-ANT7								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			MHz					
117.	GFSK	Back Side	2480	17.61	18.0	1.094	0.024	0.026
	GFSK	Front Side	2480	17.61	18.0	1.094	0.010	0.011
	GFSK	Left side	2480	17.61	18.0	1.094	0.035	0.038
	GFSK	Top side	2480	17.61	18.0	1.094	0.007	0.008

Remark:1. Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

2. Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 3) through 5) do not apply.

3. When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
4. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
5. Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

9.3 Simultaneous Multi-band Transmission SAR Analysis

List of Mode for Simultaneous Multi-band Transmission

No.	Configurations	Head SAR	Body SAR
1	GSM(Voice/Data) + WLAN(2.4GHz) (Data)+ WLAN(5GHz)(Data)+ NFC)(Data)	Yes	Yes
2	WCDMA (Voice/Data)+ WLAN(2.4GHz) (Data)+ WLAN(5GHz)(Data)+ NFC)(Data)	Yes	Yes
3	LTE(Data) + WLAN(2.4GHz) (Data)+ WLAN(5GHz)(Data)+ NFC)(Data)	Yes	Yes
4	NR(Data) + WLAN(2.4GHz) (Data)+ WLAN(5GHz)(Data)+ NFC)(Data)	Yes	Yes
5	GSM(Voice/Data) + Bluetooth(Data))+ WLAN(5GHz)(Data)+ NFC)(Data)	Yes	Yes
6	WCDMA (Voice/Data) + Bluetooth(Data))+ WLAN(5GHz)(Data)+ NFC)(Data)	Yes	Yes
7	LTE(Data) + Bluetooth(Data))+ WLAN(5GHz)(Data)+ NFC)(Data)	Yes	Yes
8	NR(Data) + Bluetooth(Data))+ WLAN(5GHz)(Data)+ NFC)(Data)	Yes	Yes

Remark:

1. GSM, WCDMA, LTE and NR share the same antenna, and cannot transmit simultaneously.
2. WLAN(2.4GHz) and Bluetooth share the same antenna, and cannot transmit simultaneously.
3. WLAN(2.4GHz) and WLAN(5GHz) can transmit simultaneously.
4. According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})}/x]$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

For simultaneous transmission analysis, NFC SAR is estimated per KDB 447498 D01 v06 as below:

NFC:

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	X	SAR(1g) 5mm	SAR(1g) 10mm	SAR(1g) 15mm
-34.0	0.0004	5/10	0.01356	7.5	0.0001	0.0001	0.0001

4. The maximum SAR summation is calculated based on the same configuration and test position.

Head SAR**WWAN and WLAN**

	WWAN		WLAN(2.4GHz)	WLAN(5GHz)	NFC	Summed SAR (W/kg)
Position	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM	0.222	0.167	0.633	0.0001	1.022
Right Tilted	GSM	0.207	0.162	0.615	0.0001	0.984
Left Cheek	GSM	0.183	0.068	0.309	0.0001	0.560
Left Tilted	GSM	0.172	0.064	0.298	0.0001	0.534
Right Cheek	WCDMA	0.077	0.167	0.633	0.0001	0.877
Right Tilted	WCDMA	0.073	0.162	0.615	0.0001	0.850
Left Cheek	WCDMA	0.177	0.068	0.309	0.0001	0.554
Left Tilted	WCDMA	0.165	0.064	0.298	0.0001	0.527
Right Cheek	LTE	0.167	0.167	0.633	0.0001	0.967
Right Tilted	LTE	0.159	0.162	0.615	0.0001	0.936
Left Cheek	LTE	0.182	0.068	0.309	0.0001	0.559
Left Tilted	LTE	0.169	0.064	0.298	0.0001	0.531
Right Cheek	NR SA	0.439	0.167	0.633	0.0001	1.239
Right Tilted	NR SA	0.431	0.162	0.615	0.0001	1.208
Left Cheek	NR SA	0.456	0.068	0.309	0.0001	0.833
Left Tilted	NR SA	0.444	0.064	0.298	0.0001	0.806
Right Cheek	NR EN-DC	0.373	0.167	0.633	0.0001	1.173
Right Tilted	NR EN-DC	0.361	0.162	0.615	0.0001	1.138
Left Cheek	NR EN-DC	0.405	0.068	0.309	0.0001	0.782
Left Tilted	NR EN-DC	0.387	0.064	0.298	0.0001	0.749

Note:

1. WWAN + Bluetooth test result less than the WWAN + WLAN (2.4GHz/5GHz) test result, so the WWAN + Bluetooth test result is not show in the test report.

Body-worn SAR**WWAN and WLAN**

	WWAN		WLAN(2.4GHz)	WLAN(5GHz)	NFC	Summed SAR (W/kg)
Position	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back side	GSM	0.172	0.068	0.293	0.0001	0.533
Front side	GSM	0.144	0.046	0.212	0.0001	0.402
Back side	WCDMA	0.346	0.068	0.293	0.0001	0.707
Front side	WCDMA	0.210	0.046	0.212	0.0001	0.468
Back side	LTE	0.479	0.068	0.293	0.0001	0.840
Front side	LTE	0.429	0.046	0.212	0.0001	0.687
Back side	NR SA	0.271	0.068	0.293	0.0001	0.632
Front side	NR SA	0.200	0.046	0.212	0.0001	0.458
Back side	NR EN-DC	0.245	0.068	0.293	0.0001	0.606
Front side	NR EN-DC	0.204	0.046	0.212	0.0001	0.462

Note:

1. WWAN + Bluetooth test result less than the WWAN + WLAN (2.4GHz/5GHz) test result, so the WWAN + Bluetooth test result is not show in the test report.

Hotspot SAR

WWAN and WLAN

	WWAN		WLAN(2.4GHz)	WLAN(5GHz)	NFC	Summed SAR (W/kg)
Position	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM	0.435	0.121	0.374	0.0001	0.930
Front	GSM	0.325	0.071	0.284	0.0001	0.680
Right side	GSM	0.252	--	--	0.0001	0.252
Left side	GSM	0.083	0.139	0.257	0.0001	0.479
Top side	GSM	--	0.029	0.466	0.0001	0.495
Bottom side	GSM	0.339	--	--	0.0001	0.339
Back	WCDMA	0.501	0.121	0.374	0.0001	0.996
Front	WCDMA	0.293	0.071	0.284	0.0001	0.648
Right side	WCDMA	0.202	--	--	0.0001	0.202
Left side	WCDMA	0.106	0.139	0.257	0.0001	0.502
Top side	WCDMA	--	0.029	0.466	0.0001	0.495
Bottom side	WCDMA	0.338	--	--	0.0001	0.338
Back	LTE	0.725	0.121	0.374	0.0001	1.220
Front	LTE	0.545	0.071	0.284	0.0001	0.900
Right side	LTE	0.403	--	--	0.0001	0.403
Left side	LTE	0.327	0.139	0.257	0.0001	0.723
Top side	LTE	--	0.029	0.466	0.0001	0.495
Bottom side	LTE	0.421	--	--	0.0001	0.421
Back	NR SA	0.442	0.121	0.374	0.0001	0.937
Front	NR SA	0.365	0.071	0.284	0.0001	0.720
Right side	NR SA	0.194	--	--	0.0001	0.194
Left side	NR SA	0.229	0.139	0.257	0.0001	0.625
Top side	NR SA	0.397	0.029	0.466	0.0001	0.892
Bottom side	NR SA	0.157	--	--	0.0001	0.157
Back	NR EN-DC	0.404	0.121	0.374	0.0001	0.899
Front	NR EN-DC	0.229	0.071	0.284	0.0001	0.584
Right side	NR EN-DC	0.139	--	--	0.0001	0.139
Left side	NR EN-DC	0.216	0.139	0.257	0.0001	0.612
Top side	NR EN-DC	0.364	0.029	0.466	0.0001	0.859
Bottom side	NR EN-DC	0.143	--	--	0.0001	0.143

Note:

1. WWAN + Bluetooth test result less than the WWAN + WLAN (2.4GHz/5GHz) test result, so the WWAN + Bluetooth test result is not show in the test report.

10. Measurement Uncertainty

10.1 Uncertainty for SAR Test

Input quantity X_i (source of uncertainty)	Ref.	Prob. Dist PDF_i	Unc. $a(x_i)$	Div. q_i	$u(x_i) =$ $a(x_i)/q_i$	c_i (1 g; 10 g)	$u(y) = c_i \cdot u(x_i)$	v_i or v_{eff}
Measurement System errors								
Probe calibration	8.4.1.1	N	7.00	2	3.5	1	3.5	∞
Probe calibration drift	8.4.1.2	R	0	$\sqrt{3}$	0	1	0	∞
Probe linearity and detection limit	8.4.1.3	R	5.00	$\sqrt{3}$	2.89	1	2.89	∞
Broadband signal	8.4.1.4	R	0	$\sqrt{3}$	0	1	0	∞
Probe isotropy	8.4.1.5	R	2.50	$\sqrt{3}$	1.44	1	1.44	∞
Other probe and data acquisition errors	8.4.1.6	N	0.02	1	0.02	1	0.02	∞
RF ambient and noise	8.4.1.7	N	0	1	0	1	0	∞
Probe positioning errors	8.4.1.8	N	1.40	1	1.40	$2/TM$	0.70	
Data processing errors	8.4.1.9	N	0.05	1	0.05	1	0.05	∞
Phantom and device (DUT or validation antenna) errors								
Measurement of phantom conductivity(σ)	8.4.2.1	N	4.00	1	4.00	$c_{\epsilon_s}, c_{\sigma}$	4.00	∞
Temperature effects (medium)	8.4.2.2	R	2.50	$\sqrt{3}$	1.44	$c_{\epsilon_s}, c_{\sigma}$	1.44	∞
Shell permittivity	8.4.2.3	R	5.00	$\sqrt{3}$	2.88	See 8.4.2.3	2.88	∞
Distance between the radiating element of the DUT and the phantom medium	8.4.2.4	N	0.03	1	0.03	2	0.02	∞
Repeatability of positioning the DUT or source against the phantom	8.4.2.5	N	0.05	1	0.05	1	0.05	5
Device holder effects	8.4.2.6	N	5.00	1	5.00	1	5.00	
Effect of operating mode on probe sensitivity	8.4.2.7	R	0	$\sqrt{3}$	0	1	0	∞
Time-average SAR	8.4.2.8	R	0	$\sqrt{3}$	0	1	0	∞
Variation in SAR due to drift in output of DUT	8.4.2.9	N	5.00	1	5.00	1	5.00	
Validation antenna uncertainty (validation measurement only)	8.4.2.10	N	0	1	0	1	0	
Uncertainty in accepted power	8.4.2.11	N	0	1	0	1	0	

(validation measurement only)								
Corrections to the SAR result								
Phantom deviation from target (ϵ', σ)	8.4.3.1	N	0.05	1	0.05	1	0.05	
SAR scaling	8.4.3.2	R	2.00	$\sqrt{3}$	1.15	1	1.15	
Combined Standard Uncertainty		RSS			10.11		10.11	$V_{\text{eff}}^{\text{C}}$
Expanded uncertainty, U		K=2			20.23		20.23	

Annex A. Plots of System Performance Check

Please refer to the Annex for SAR

Annex B. Plots of SAR Measurement

Please refer to the Annex for SAR

Annex C. EUT Photos

Please refer to the Annex for SAR

Annex D. Test Setup Photos

Please refer to the Annex for SAR

Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

***** END OF REPORT *****