



www.ecmg-global.net

EMI TEST REPORT

On Model Name: IP Camera

Model Number: GXV3610_HD, GXV3610_FHD

Brand Name: Grandstream

Prepared for Grandstream Networks, INC

FCC ID Number: YZZGXV3610-FHD

According to FCC 47 CFR Part 15, Subpart B

Test Report #: SHE-1307-11029-FCC

Tested by: Daomen Galanz
Daomen/Engineer Company Name

Reviewed by: Jawen Yin ECMG
Jawen Yin/ Senior Engineer Company Name

QC Manager: Swall Zhang ECMG
Swall Zhang/QC Manager Company Name

Test Report Released by: Swall Zhang August 7th, 2013
Swall Zhang Date

Test Location

Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room.

<i>Test Site Location</i>	<i>: Galanz</i>
	<i>: 25 South Ronggui Rd., Shunde, Foshan, Guangdong, China</i>
<i>Tel</i>	<i>: (86)-757-23612785</i>
<i>Fax</i>	<i>: (86)-757-23612537</i>

Test Facility

The test facility was recognized, certified, or accredited by the following organizations:

- **CNAL - LAB Code: L2244**

Galanz EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC - Registration No.: 580210**

Galanz EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC was maintained in our files.

Table of Contents

<i>GOVERNMENT DISCLAIMER NOTICE</i>	2
<i>REPRODUCTION CLAUSE</i>	2
<i>OPINIONS AND INTERPRETATIONS</i>	2
<i>STATEMENT OF MEASUREMENT UNCERTAINTY</i>	2
<i>ADMINISTRATIVE DATA</i>	3
<i>EUT DESCRIPTION</i>	4
<i>EUT MODEL DERIVED</i>	10
<i>TEST SUMMARY</i>	11
<i>EUT OPERATION</i>	12
<i>EUT EXERCISE SOFTWARE</i>	12
<i>EQUIPMENT MODIFICATION</i>	12
<i>EUT SAMPLE PHOTOS</i>	13
<i>TEST SYSTEM DETAILS</i>	20
<i>CONFIGURATION OF TESTED SYSTEM</i>	22
<i>ATTACHMENT 1 - CONDUCTED EMISSION TEST RESULTS</i>	23
<i>ATTACHMENT 2 - RADIATED EMISSION MEASUREMENT</i>	27

List Attached Files

Exhibit Type	File Description	File Name
<i>Test Report</i>	<i>Test Report</i>	YZZGV3610-FHD _Test report.pdf
<i>Operation Description</i>	<i>Technical Description</i>	YZZGV3610-FHD _operation description.pdf
<i>External Photos</i>	<i>External Photos</i>	YZZGV3610-FHD _External Photos
<i>Internal Photos</i>	<i>Internal Photos</i>	YZZGV3610-FHD _Internal Photos
<i>Block Diagram</i>	<i>Block Diagram</i>	YZZGV3610-FHD _Block Diagram.pdf
<i>Schematics</i>	<i>Circuit Diagram</i>	YZZGV3610-FHD _Schematics.pdf
<i>ID Label/Location</i>	<i>Label and Location</i>	YZZGV3610-FHD _Label & Location.pdf
<i>User Manual</i>	<i>User Manual</i>	YZZGV3610-FHD _User Manual.pdf
<i>Test setup photos</i>	<i>Test set-up photos</i>	YZZGV3610-FHD _Test Set-up Photos

Government Disclaimer Notice

When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

Reproduction Clause

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from ECMG Electronic Technical Testing Corp (Shenzhen).

Opinions and Interpretations

This test report relates to the abovementioned equipment under test (EUT). Without the permission of ECMG Electronic Technical Testing Corp (Shenzhen). Test Lab this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.

Statement of Measurement Uncertainty

The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

Administrative Data

Test Sample : IP Camera

Model Numbers : G_XV3610_HD, G_XV3610_FHD

Model Tested : G_XV3610_FHD

Date of Received : August 1st, 2013

Date Tested : August 2nd, 2013

Applicant : Grandstream Networks, INC

Address : 5F, Bldg #1, No.2 Kefa Rd., Science & Technology Park, Shenzhen, China

Telephone : (86)-755-26014600

Fax : (86)-755-26014601

Manufacturer : Grandstream Networks, INC

Address : 5F, Bldg #1, No.2 Kefa Rd., Science & Technology Park, Shenzhen, China

Telephone : (86)-755-26014600

Fax : (86)-755-26014601

Factory : Grandstream Networks, INC

Address : 5F, Bldg #1, No.2 Kefa Rd., Science & Technology Park, Shenzhen, China

Telephone : (86)-755-26014600

Fax : (86)-755-26014601

EUT Description

Grandstream Networks, INC., Model Tested GXV3610_FHD (referred to as the EUT in this report) is an IP Camera.

The EUT is an IP Camera and technical specifications of EUT are as belows:

Parameter		Range
<i>Basic parameters</i>	<i>Rated voltage</i>	12V
	<i>Rated Current</i>	1A
<i>I/O Ports</i>	<i>Network Port</i>	<i>10/100Mbps RJ-45 ports for PC (downlink) connection</i>
	<i>Power Jack</i>	<i>12V DC power port; UL Certified</i>
<i>Power Adapter #1</i>	<i>Input</i>	<i>100-240VAC 50/60Hz 0.3A</i>
	<i>Output</i>	<i>12VDC, 1.0A</i>
	<i>Model</i>	<i>SEF1200100A1BB</i>
	<i>Brand name</i>	<i>Mass power</i>
<i>Power Adapter #2</i>	<i>Input</i>	<i>100-240VAC 50/60Hz 0.3A</i>
	<i>Output</i>	<i>12VDC, 1.0A</i>
	<i>Model</i>	<i>WEF1200100A1BA</i>
	<i>Brand name</i>	<i>Mass power</i>

Note:

- 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available power adapter. power adapter #2 was selected for the final test.*
- 2. For more detailed informations or features please refer to user's manual of EUT.*

EUT Modifications:


This is an updating test report based on original report # : SHE-1306-11008-FCC, Differences between them are as belows:

1. *Changed the shape of main board from quadrate board to circular board. they are all identical except for PCB Layout(see the following photos);*
2. *Added a power adapter #2(see EUT description);*
3. *Added a metallic board under main board. (see the following photos);*
4. *Removed a ferrite core on I/O cables. (see the following photos);*
5. *Updated conducted emission&radiated emission test(see Attachment 1 and Attachment 2);*
6. *Anything elses are the same as before.*


Top view for original main board:




Top view for new main board:

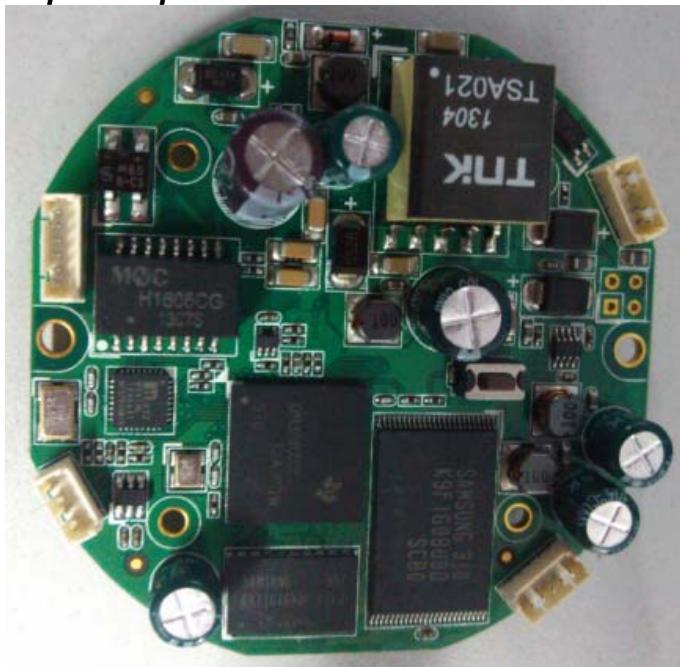


Bottom view for original main board:

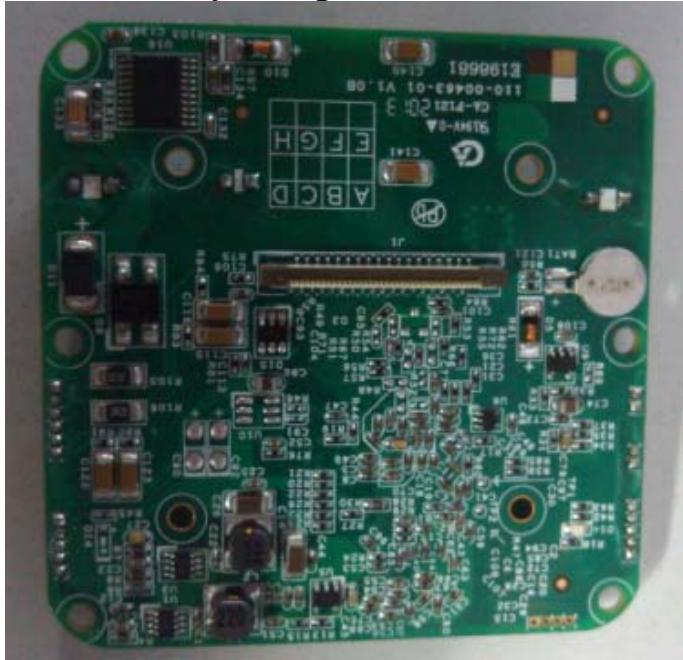


Bottom view for new main board:

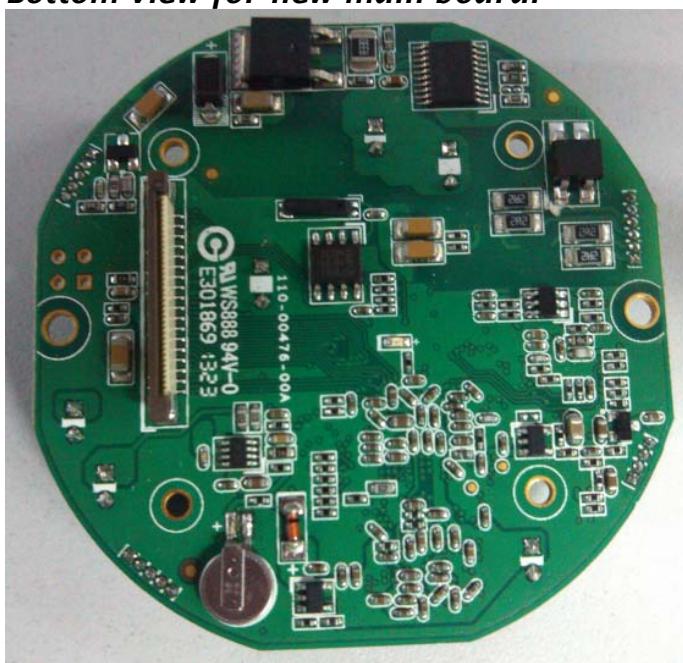

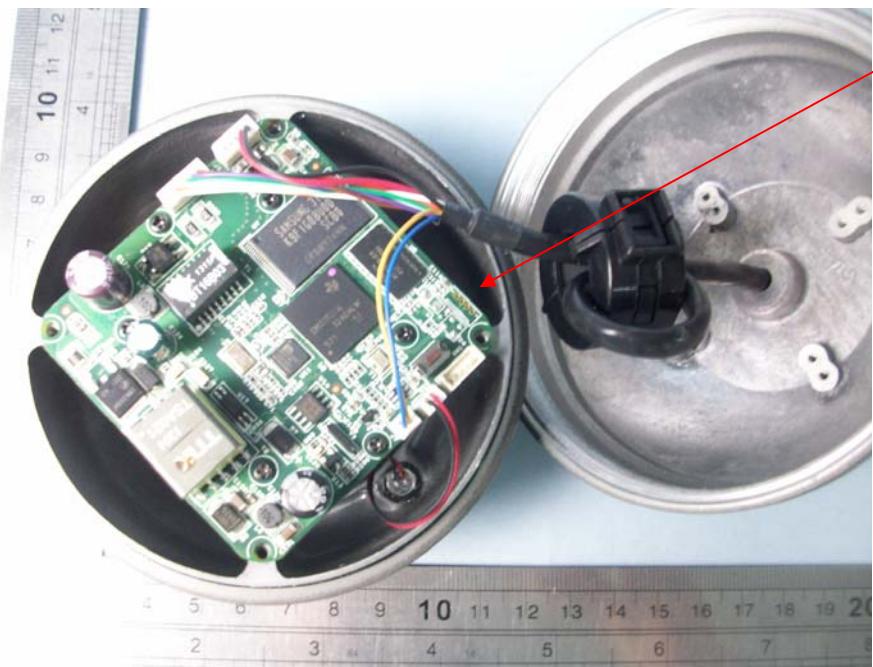


*Original product
without metallic
board*

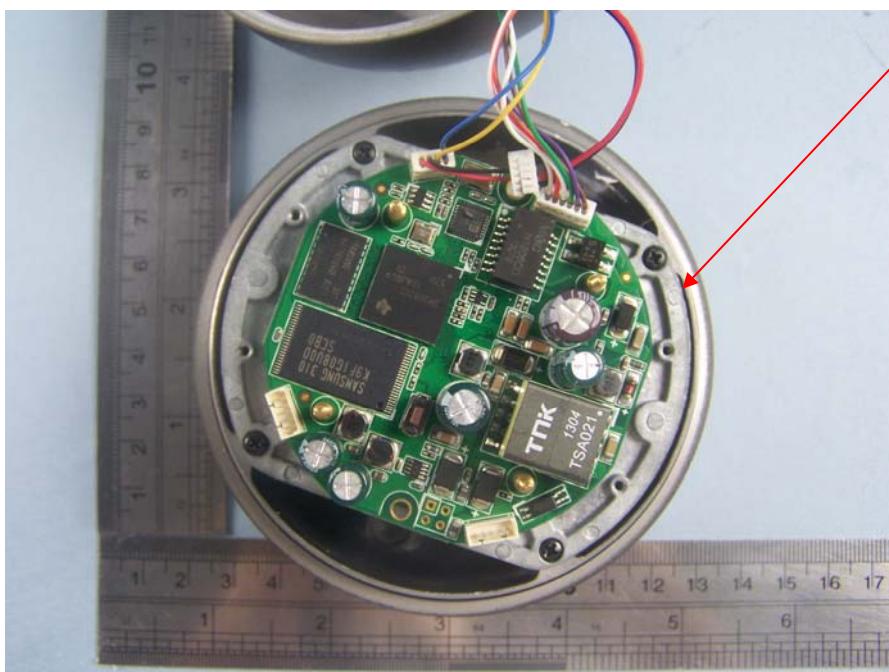

*New product with
metallic board*



Original product
with a ferrite core.

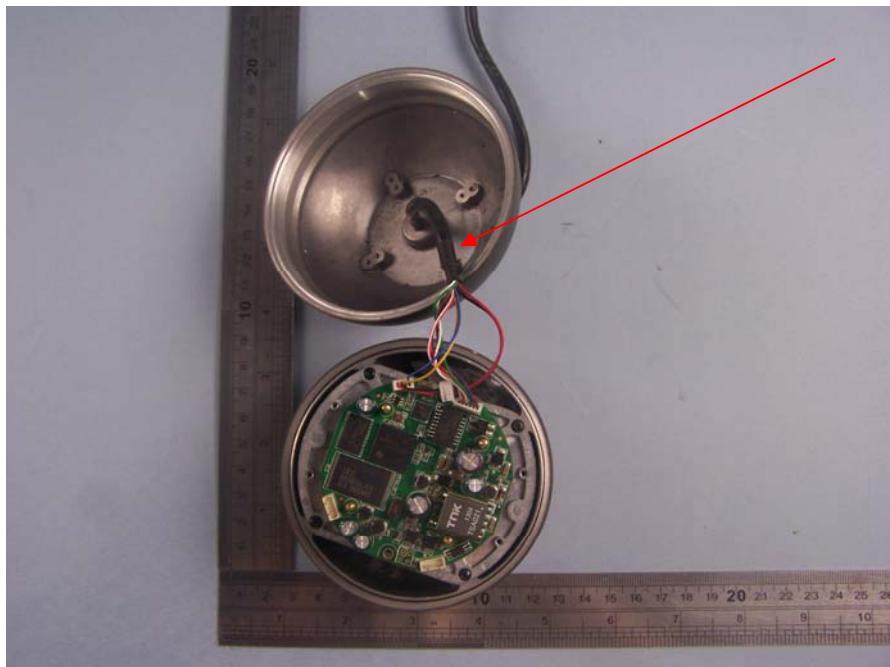

New product without
a ferrite core.

EUT Model Derived

Model GXV3610_HD and GXV3610_FHD are series product, The differences between them are as follows:

GXV3610_HD is High Definition digital which uses the DSP of DM365-300 and the Sensor of AR0130. GXV3610_FHD is Full High Definition digital which uses the DSP of DM368-400 and the Sensor of AR0331.

Pre-scan has been conducted to determine the worst-case between this two models, model GXV3610_FHD was selected for the final testing.

Test Summary

The Electromagnetic Compatibility requirements on model GXB3610_FHD for this test are stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

Emission Tests				
Specifications	Description	Test Results	Test Point	Remark
FCC Part 15.107 ANSI C63.4 -2003	Conducted Emission	Passed	AC Input Port	Attachment 1
FCC Part 15.109 ANSI C63.4 -2003	Radiated Emission	Passed	Enclosure	Attachment 2

EUT Operation Mode

The system was tested in as normal use status. The following modes were selected for the final testing:

IP Camera mode:

Connected the EUT to an notebook PC by an RJ-45 cord and established a video Links between them and measured it.

PoE mode:

Let the EUT operates in PoE mode and measured it.

EUT Exercise Software

The device is not programmable and does not use software.

Equipment Modification

Any modifications installed previous to testing by Grandstream Networks, INC. will be incorporated in each production model sold or leased in United States.

There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen).

EUT Sample Photos for model GXV3610_FHD




EUT- Front View




EUT- Rear View




EUT- Side View

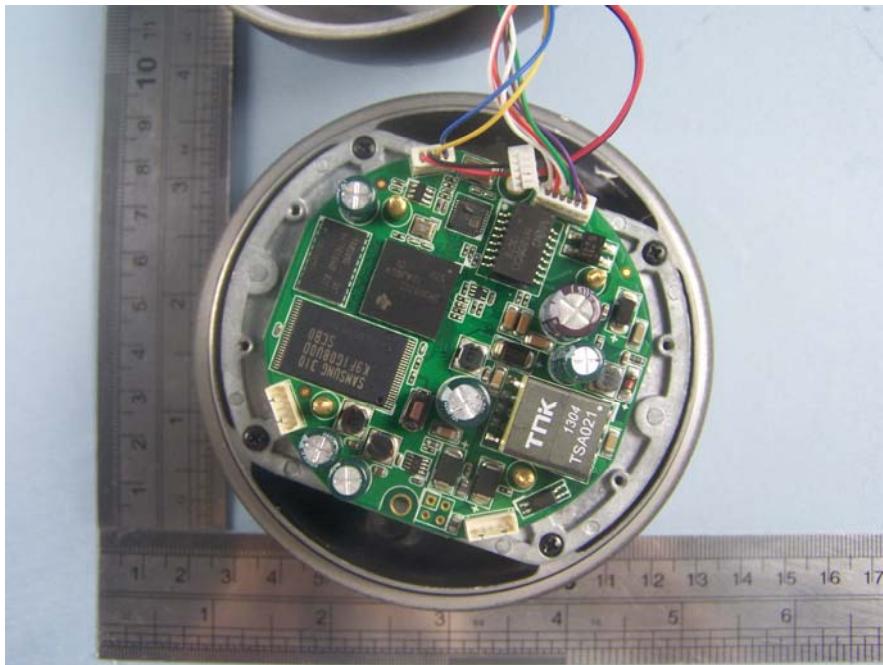


EUT-Uncovered View

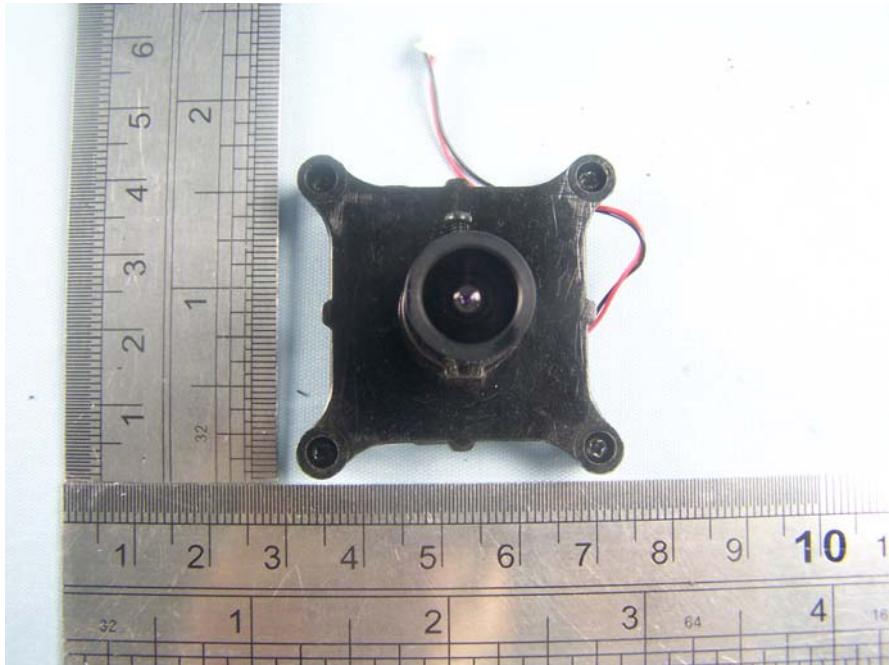


Lens Front View

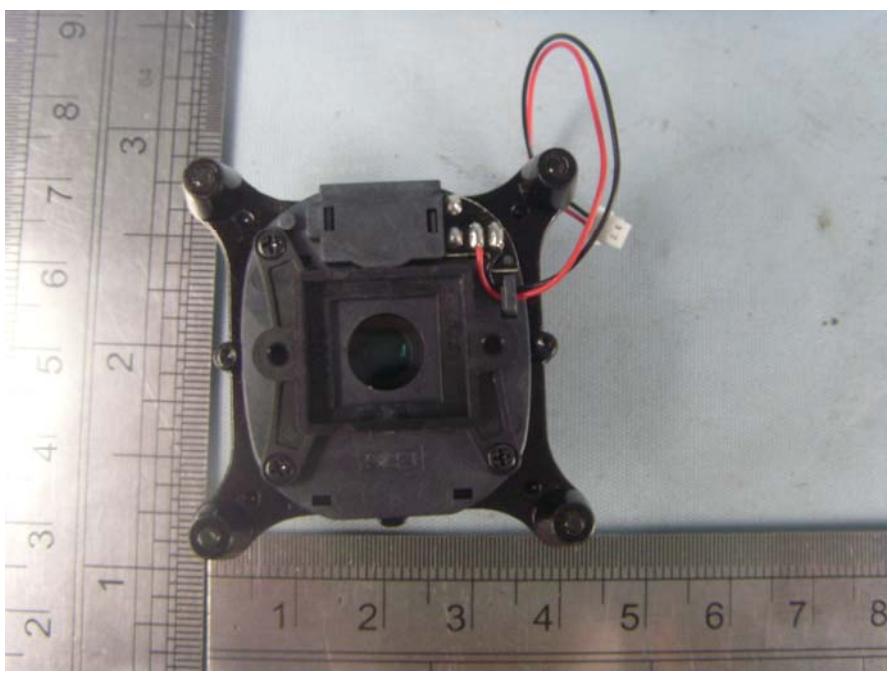


Lens Rear View

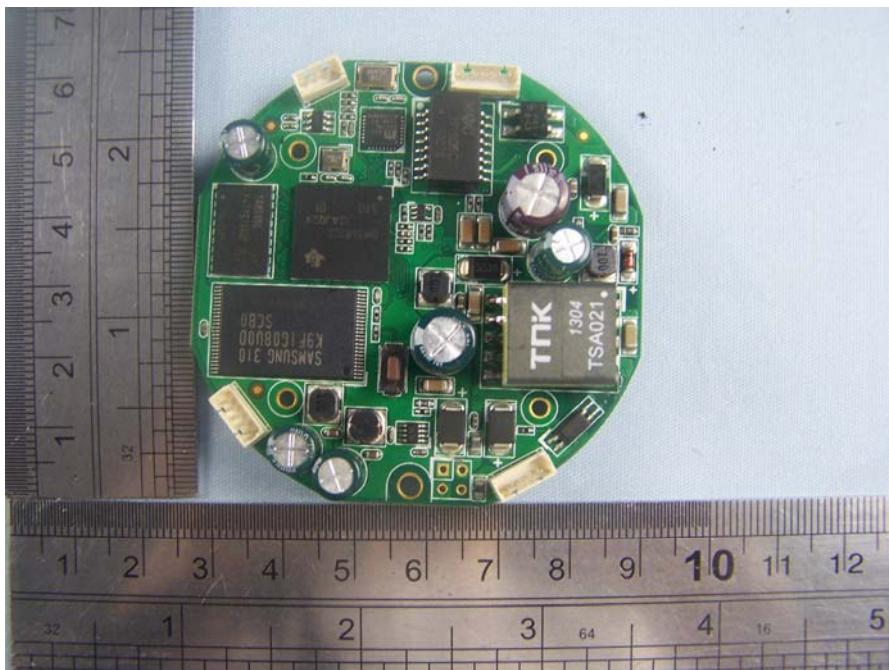


Main board- Top View

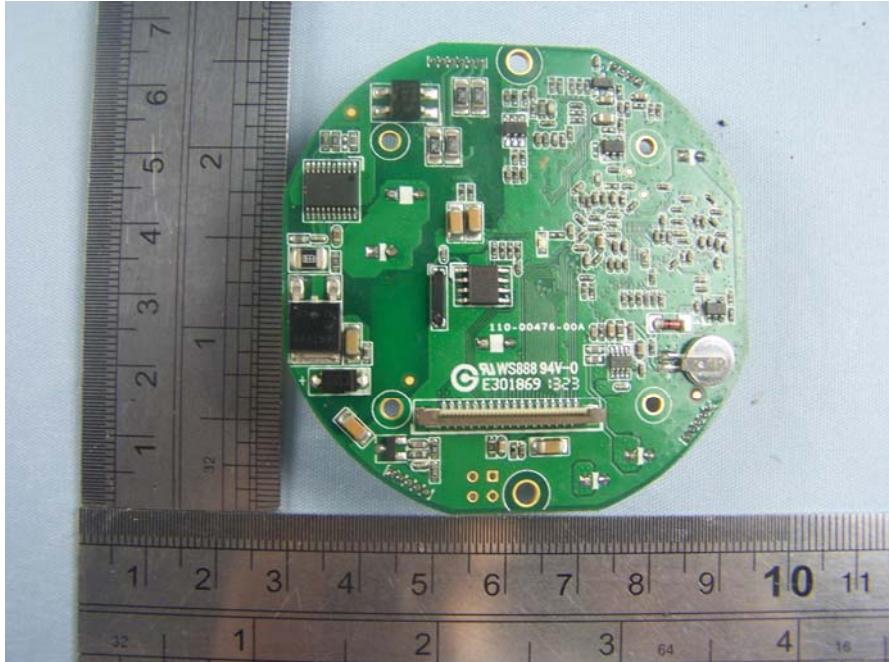


Main board- Bottom View

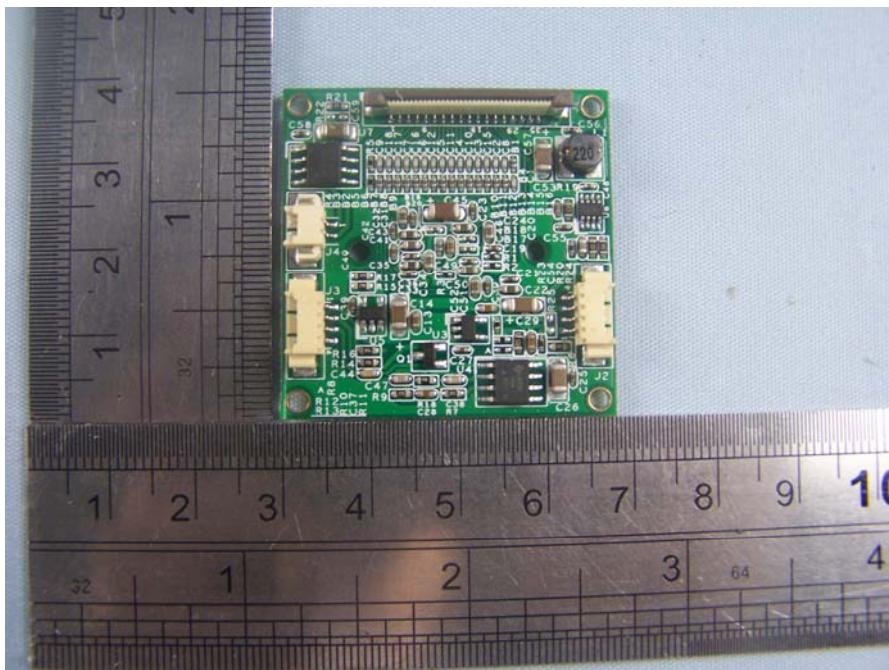


Sensor board - Top View

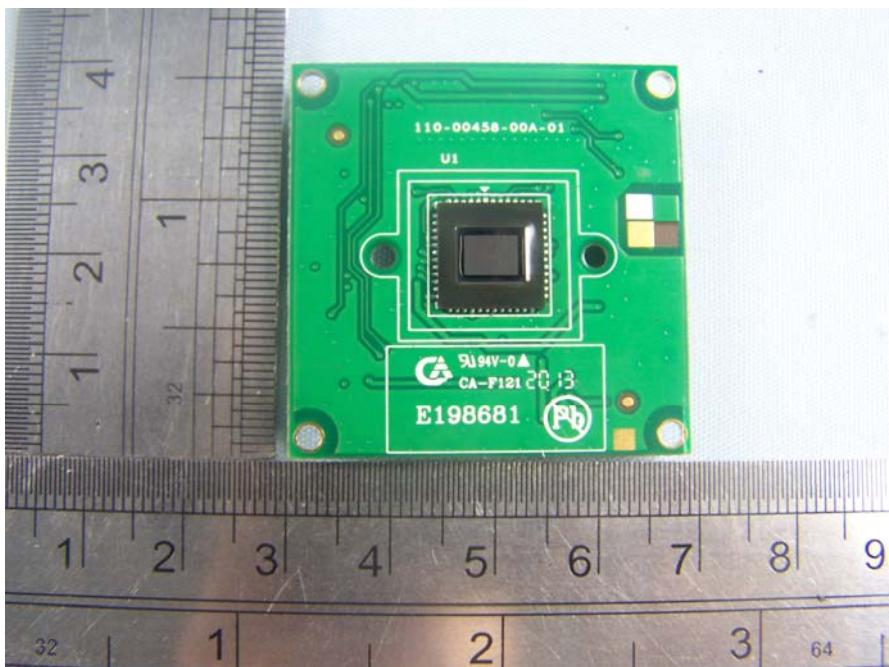

Sensor board - bottom View

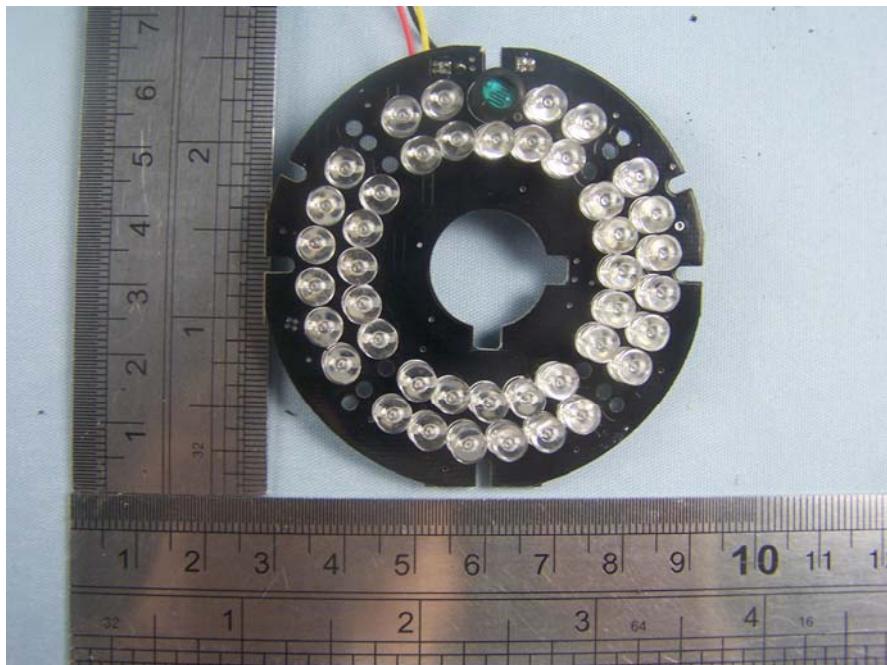

LED board - Top View

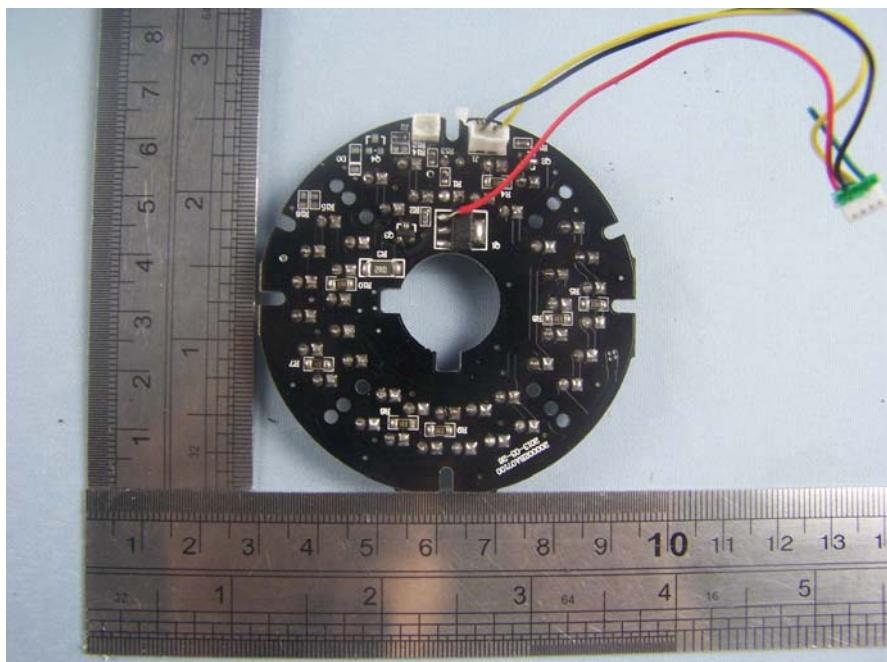

LED board- Bottom View



Power Adaptor #1 View (Manufacturer: Mass Power)



Adaptor View #2 (Manufacturer: Mass Power)

Test System Details

EUT			
Model Number:	<i>GXV3610_HD,GXV3610_FHD</i>		
Model Tested:	<i>GXV3610_FHD</i>		
Description:	<i>IP Camera</i>		
Input:	<i>AC 120V/60Hz</i>		
Manufacturer:	<i>Grandstream Networks, INC</i>		
Support Equipment			
Description	Model Number	Serial Number	Manufacturer
<i>Notebook PC</i>	<i>ThinkPad X121e</i>	<i>---</i>	<i>Lenovo</i>
<i>Mouse</i>	<i>MO32B0</i>	<i>23-033131</i>	<i>IBM</i>
<i>Keyboard</i>	<i>SK-1788</i>	<i>---</i>	<i>LENOVO</i>
<i>Monitor</i>	<i>TFT1780PS</i>	<i>---</i>	<i>AOC</i>


<i>Cable Description</i>					
<i>Description</i>	<i>From</i>	<i>To</i>	<i>Length (Meters)</i>	<i>Shielded (Y/N)</i>	<i>Ferrite (Y/N)</i>
<i>Adaptor Cord Of Notebook PC</i>	AC Adaptor	Notebook PC	1.6	N	Y
	AC Plug	AC Adaptor	1.2	N	Y
<i>Power cord of monitor</i>	Monitor	Plug	1.2	N	Y
<i>Mouse cord</i>	Mouse	Notebook PC	1.2	N	Y
<i>Keyboard cord</i>	Keyboard	Notebook PC	1.2	N	Y
<i>VGA cord</i>	Notebook PC	Monitor	1.2	Y	Y
<i>RJ-45 Cord</i>	EUT	Notebook PC	2.0	N	N
<i>AC Adaptor cord</i>	EUT	Plug	1.8	N	N

Note: The "EUT" means "IP Camera".


NOTE:


The EUT has been tested as an independent unit together with other necessary accessories or support units. The above support units or accessories were used to form a representative test configuration during the test tests.

Configuration of Tested System

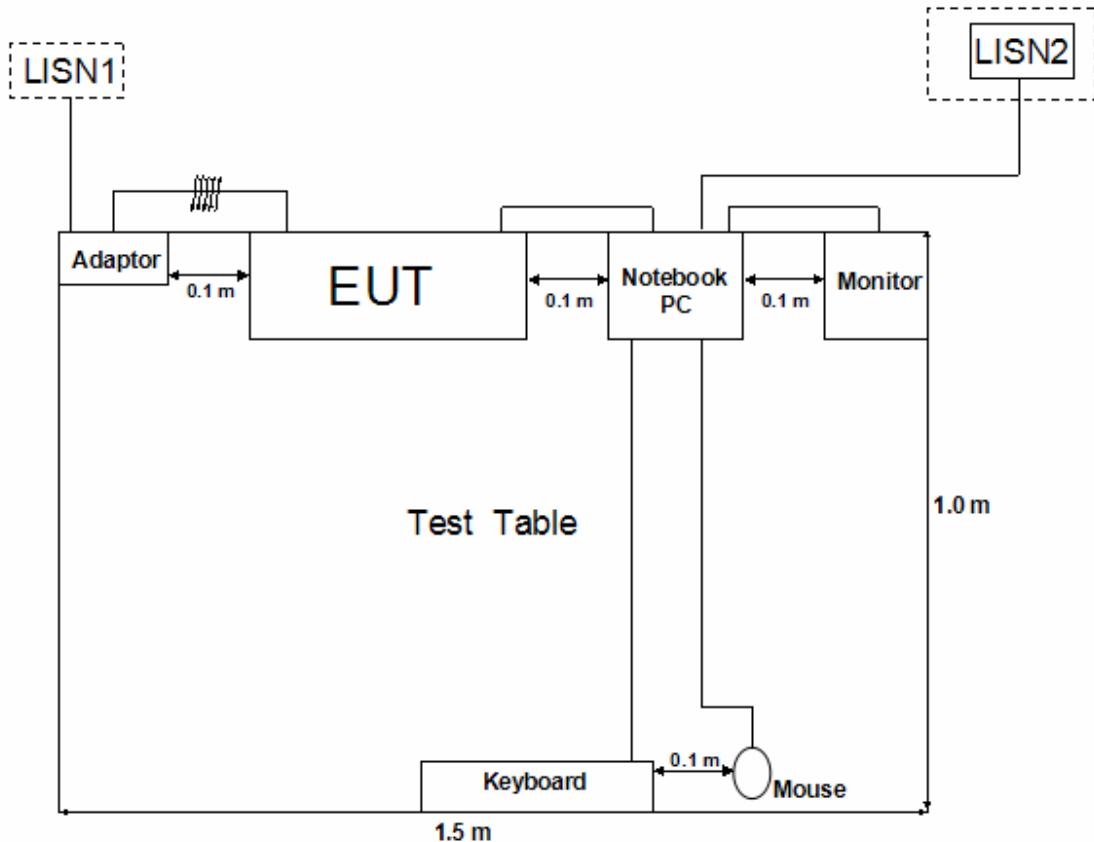


ATTACHMENT 1 - CONDUCTED EMISSION TEST RESULTS

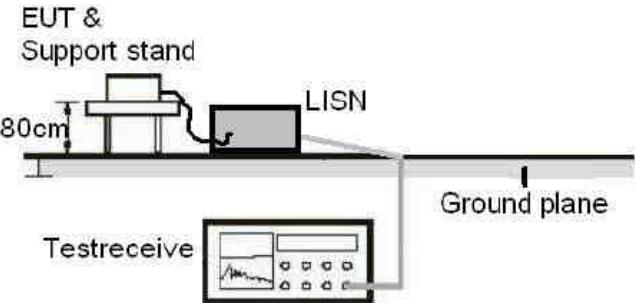CLIENT:	Grandstream Networks, INC	TEST STANDERD:	FCC Part 15, Subpart B, Section 15.107
MODEL NUMBERS:	GXV3610_HD,GXV3610_FHD	PRODUCT:	IP Camera
MODEL TESTED:	GXV3610_FHD	EUT DESIGNATION:	Home or Office
TEMPERATURE:	22°C	HUMIDITY:	48%
ATM PRESSURE:	103kPa	GROUNDING:	None
TESTED BY:	Daomen	DATE OF TEST:	August 2 nd , 2013
TEST REFERENCE:	ANSI C63.4- 2003		
TEST PROCEDURE:	The EUT was set up according to the guidelines of ANSI C63.4: 2003 for conducted emissions. The measurement was using a AMN on each line and an EMI receiver peak scan was made at the frequency measurement range. The six highest significant peaks were then marked, and these signals were then quasi-peaked and averaged. The frequency range investigated was from 150KHz to 30MHz.		
DESCRIPTION OF TEST MODE:	IP Camera mode		
TEST SET UP:			
TESTED RANGE:	150kHz to 30MHz		
TEST VOLTAGE:	AC 120V/60Hz		
RESULTS:	The EUT meets the requirements of test reference for Conducted Emissions. The test results relate only to the equipment under test provided by client.		
Changes or Modifications:	There were no modifications installed by ECMG Electronic Technical Testing Corp(Shenzhen) test personnel.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp ± 2.6 dB		

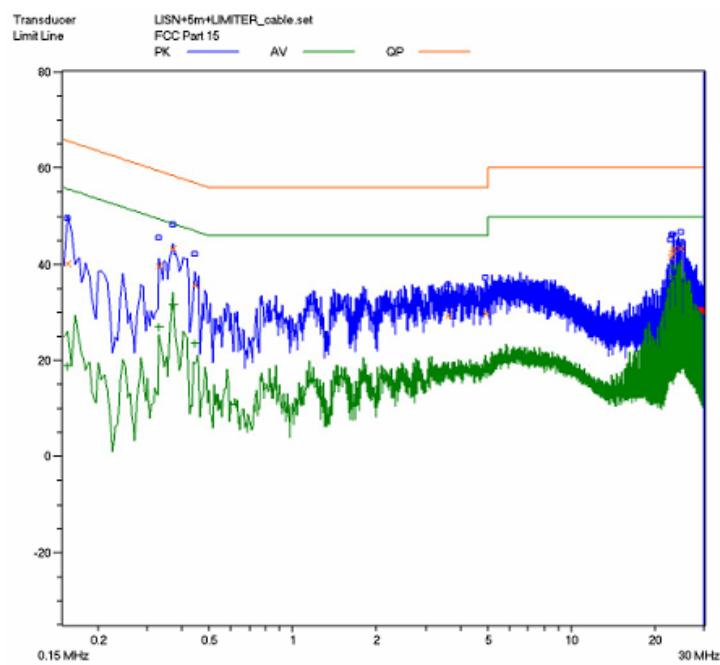

**Line L Conducted Emission Graph -
IP Camera mode**

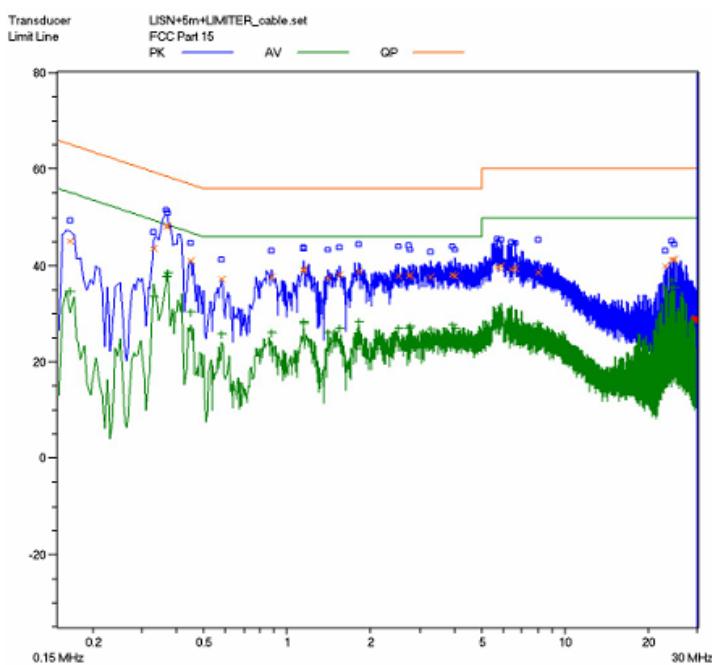

**Line N Conducted Emission Graph -
IP Camera mode**

Test Data:
IP Camera mode:

Lines (L/N)	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AV Level (dBuV)	Limits AV (dBuV)	Margin QP (dB)
L	4.755	43.4	56	-12.6	4.755	30.0	46	-16.0
L	6.150	43.5	60	-16.5	6.150	31.8	50	-18.2
L	6.240	44.0	60	-16.0	6.240	31.9	50	-18.1
N	0.170	45.9	65	-19.1	0.170	22.9	55	-32.1
N	0.215	43.9	63	-19.1	0.215	23.4	53	-29.6
N	0.420	39.5	57.4	-17.9	0.420	29.3	47.4	-18.1

Note :

- 1) All readings are using a bandwidth of 9 kHz, with a 500 ms sweep time. A video filter was not used.
- 2) "QP" means "Quasi-Peak" values, "AV" means "Average" values.
- 3) The other reading are too low against official limits that are not be recorded.

Test Equipment List:

Test Equipment	Model No.	Manufacturer	Serial No.	Last Cal.	Cal. Interval
Receiver	SMR4503	SCHAFFNER	11725	2012.07.08	2013.07.08
Line impedance stabilization network	ESH2-Z5	R&S	0338.5219.53-100396-vj	2013.03.14	2014.03.13


Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.

TESTED BY: *Severino* **ECMG**
ENGINEER **COMPANY NAME**

REVIEWED BY: *Jamonyan* **ECMG**
SENIOR ENGINEER **COMPANY NAME**



Conducted Emission Test Set-up -Front view


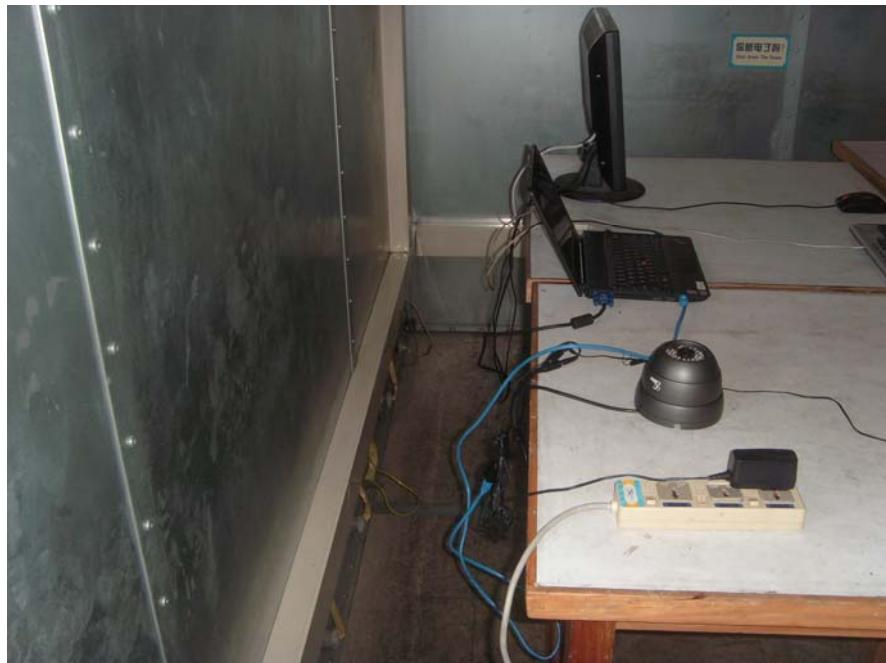



Conducted Emission Test Set-up -Rear view

ATTACHMENT 2 - RADIATED EMISSION MEASUREMENT


CLIENT:	Grandstream Networks, INC	TEST STANDERD:	FCC Part 15,Subpart B, Section 15.109
MODEL NUMBERS:	GXV3610_HD,GXV3610_FHD	PRODUCT:	IP Camera
EUT MODEL:	GXV3610_FHD	EUT DESIGNATION:	Home or Office
TEMPERATURE:	22°C	HUMIDITY:	47%RH
ATM PRESSURE:	103.0kPa	GROUNDING:	None
TESTED BY:	Daomen	DATE OF TEST:	August 2 nd , 2013
TEST REFERENCE:	ANSI C63.4: 2003		
TEST PROCEDURE:	<p>The EUT was set up according to the guidelines of ANSI C63.4: 2003 for radiated emissions.</p> <p>An EMI receiver peak scan was made at the frequency measurement range (pre-scan) in an Anechoic chamber. signal discrimination was then performed and the significant peaks marked. these peaks were then quasi-peaked in the frequency range of 30 MHz to 1GHz and average and peak in the frequency range of 1GHz to 5GHz at an anechoic chamber.</p> <p>The following data lists the significant emission frequencies, measured levels, correction factors (including cable and antenna correction factors), and the corrected readings against the limits. Explanation of the Correction Factor are given as follows:</p> <p>FS= RA + AF + CF - AG</p> <p>Where: FS = Field Strength</p> <p>RA = Receiver Amplitude</p> <p>AF = Antenna Factor</p> <p>CF = Cable Attenuation Factor</p> <p>AG = Amplifier Gain</p>		
TEST MODE	<p>Pre-scan has been conducted to determine the worst-case modes from all possible combinations between available operation mode. The following mode was selected for the final testing.</p> <p>For 9KHz to 30MHz: IP Camera mode</p> <p>FOR 30MHZ TO 5,000MHZ: IP Camera mode and PoE mode</p>		
TESTED RANGE:	30MHz to 5GHz		
TEST VOLTAGE:	AC 120V/60Hz		
RESULTS:	The EUT meet the requirements of test reference for radiated emissions. The test results relate only to the equipment under test provided by client.		

Continue on to next page...

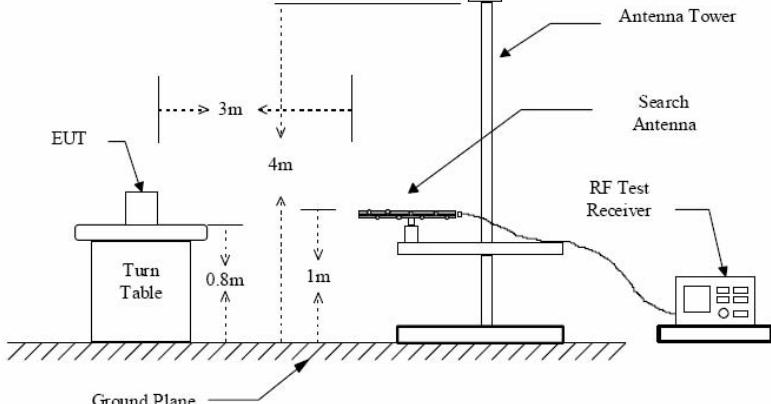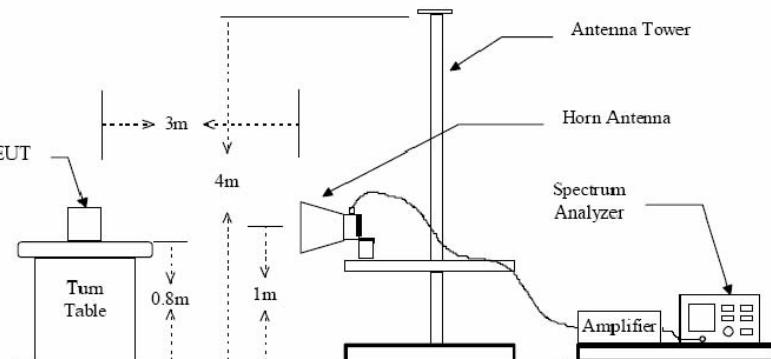
	<p>Figure 1 : Frequencies measured below 1 GHz configuration</p> 
TEST SET-UP	<p>Figure 2 : Frequencies measured above 1 GHz configuration</p> 
CHANGES OR MODIFICATIONS:	<p>There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen). Test personnel.</p>
M. UNCERTAINTY:	<p>Freq. $\pm 2 \times 10^{-7} \times$ Center Freq., Amp ± 2.6 dB</p>

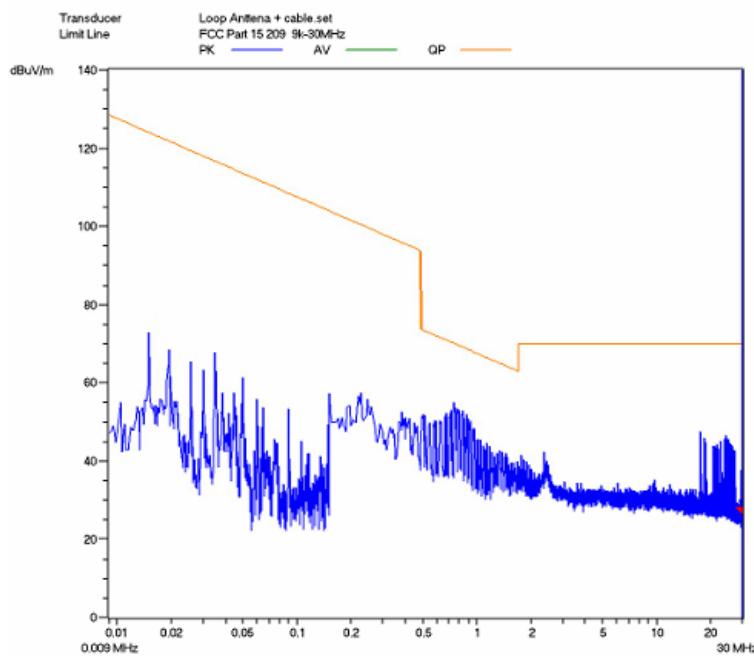


**Radiated Filed Strength Emission Test Plot
(9KHz-30MHz)- IP Camera mode**

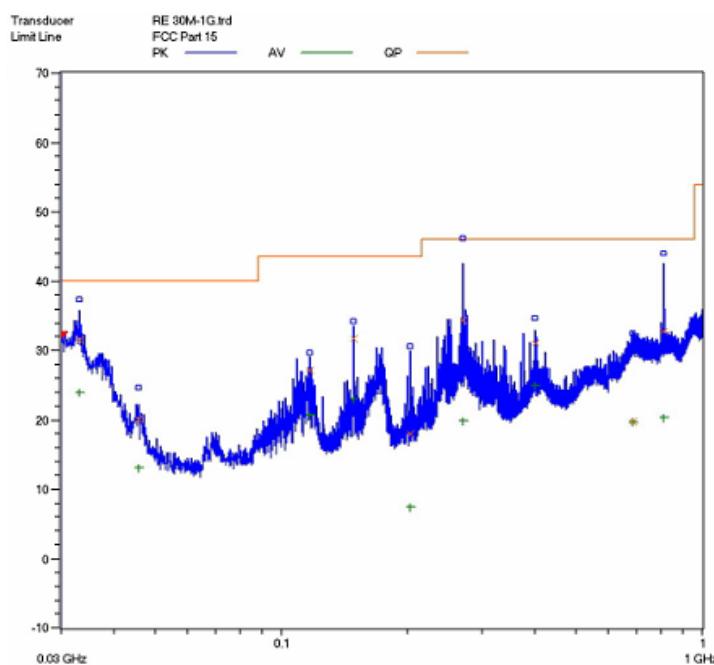


**Horizontal: Radiated Emission Test Plot
(30-1000MHz) - IP Camera mode**

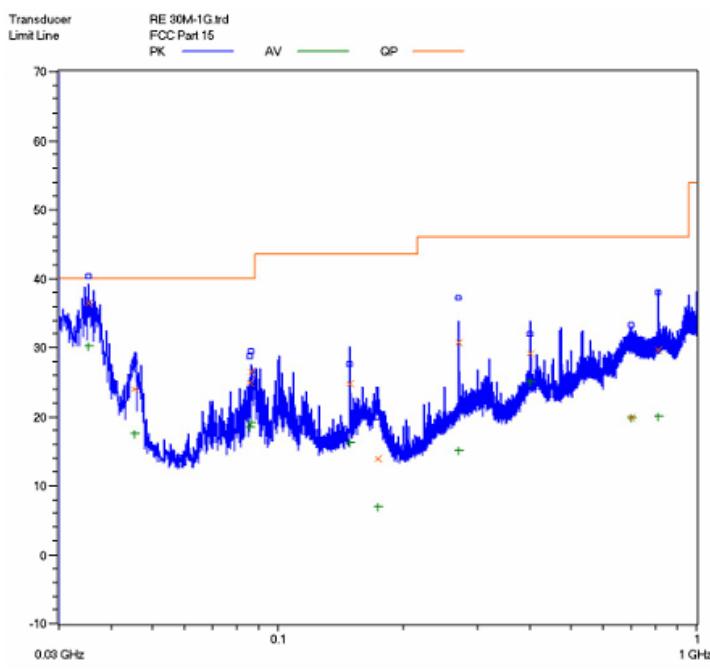

**Vertical:Radiated Emission Test Plot
(30-1000MHz) - IP Camera mode**

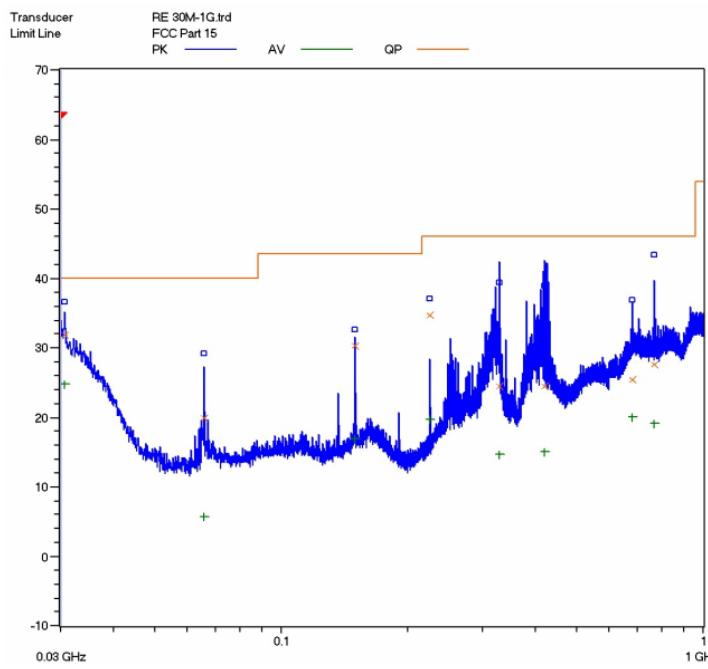

Horizontal:Radiated Emission Test Plot-PoE Mode

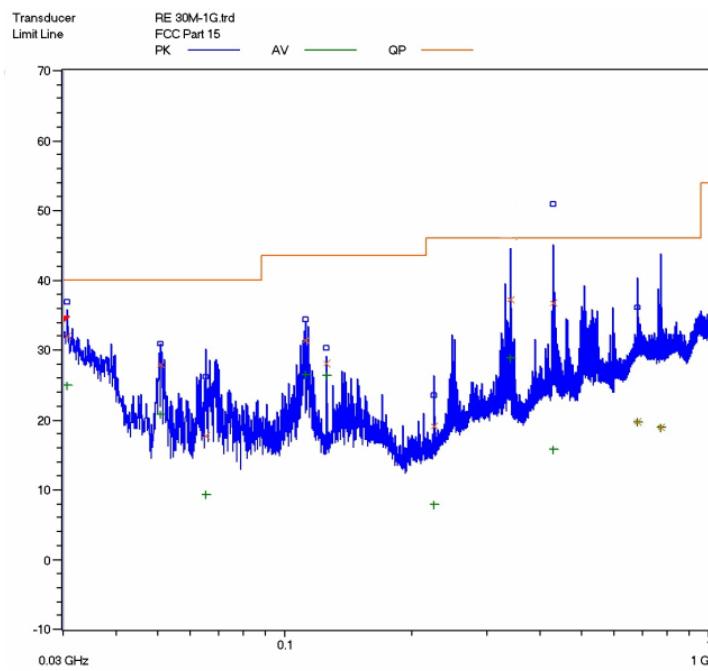

Vertical:Radiated Emission Test Plot -PoE Mode

Test Data:

9KHz to 30MHz:

Test No. #:	Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Reading Level QP (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	/	/	/	/	/	/	/
2	/	/	/	/	/	/	/
3	/	/	/	/	/	/	/
4	/	/	/	/	/	/	/
5	/	/	/	/	/	/	/
6	/	/	/	/	/	/	/

Note:

1. The field strength is calculated by adding the antenna factor, cable factor. The basic equation with a sample calculation is as follows:
Emission Level =Reading Level + Antenna Factor + Cable Loss.
2. The limits shown are based on quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. the bandwidth of Test Receiver was set at 200Hz in frequency range of 9KHz to 150KHz, 9kHz in the frequency range of 150KHz to 30MHz.
3. All emission levels in the frequency range of 9KHz to 30MHz are 20dB below the official limits that are not reported.

Test Data:**Below 1GHz:****IP Camera mode:**

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level QP (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Horizontal							
33.200	0.06	16.8	/	14.7	31.6	40	-8.4
148.480	0.14	8.8	/	22.8	31.7	43.5	-11.8
269.920	0.24	12.8	/	21.4	34.4	46	-11.6
810.080	0.48	20.05	/	11.8	32.8	46	-13.2
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/
Vertical							
35.360	0.05	12.0	/	24.4	36.4	40	-3.6
86.080	0.11	7.1	/	19.3	26.5	40	-13.5
270.000	0.25	12.9	/	26.7	38.8	46	-7.2
810.010	0.48	20.05	/	9.07	29.6	46	-16.4
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/

Note:

1. All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 60 s sweep time. A video filter was not used.
2. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
3. The other emission levels are 20dB below the official limits that are not reported.

Above 1GHz:
IP Camera mode:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
1.016	1.40	23.9	-33.6	21.81	47.11	74	-26.89	H
1.190	1.45	24.5	-33.6	23.76	49.71	74	-24.29	H
1.330	1.57	25.1	-33.6	23.53	50.20	74	-23.8	H
1.365	1.58	25.1	-33.6	24.62	51.30	74	-22.7	V
1.450	1.65	25.7	-33.6	22.47	49.82	74	-24.18	V
1.590	1.76	26.7	-33	23.3	51.76	74	-22.24	V
Average Measurement								
1.016	1.40	23.9	-33.6	18.42	43.72	54	-10.28	H
1.190	1.45	24.5	-33.6	19.65	45.60	54	-8.4	H
1.330	1.57	25.1	-33.6	13.6	40.27	54	-13.73	H
1.365	1.58	25.1	-33.6	14.95	41.63	54	-12.37	V
1.450	1.65	25.7	-33.6	18.42	45.77	54	-8.23	V
1.590	1.76	26.7	-33	11.66	40.12	54	-13.88	V

Note:

1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
2. The limits shown are based on Peak value and Average value detector above 1GHz, the bandwidth of Test Receiver was set at 1MHz above 1GHz.
3. The other emission levels are 20dB below the official limits that are not reported.

For PoE Mode/Below 1GHz:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level QP (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Horizontal							
30.640	0.02	16.7	/	15.28	32	40.0	-8.0
149.600	0.02	8.8	/	21.48	30.3	43.5	-13.2
224.400	0.12	9.0	/	25.68	34.8	46	-11.2
328.000	0.16	13.4	/	10.94	24.5	46	-21.5
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/
Vertical							
30.640	0.02	16.7	/	15.28	32.0	40	-8.0
51.040	0.02	6.2	/	21.78	28.0	40	-12.0
340.000	0.16	13.8	/	23.34	37.3	46	-8.7
428.240	0.2	15.8	/	20.8	36.8	46	-9.2
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/

Note:

1. All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 60 s sweep time. A video filter was not used.
2. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
3. The other emission levels are 20dB below the official limits that are not reported.

For PoE Mode/Above 1GHz:

Frequenc y (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarizati on (H/V)
Peak Measurement								
1.016	1.40	23.9	-33.6	29.37	54.67	74	-19.33	H
1.190	1.45	24.5	-33.6	26.28	52.23	74	-21.77	H
1.330	1.57	25.1	-33.6	23.03	49.70	74	-24.3	H
1.365	1.58	25.1	-33.6	21.68	48.36	74	-25.64	V
1.450	1.65	25.7	-33.6	22	49.35	74	-24.65	V
1.590	1.76	26.7	-33	24.25	52.71	74	-21.29	V
Average Measurement								
1.016	1.40	23.9	-33.6	21.2	46.50	54	-7.5	H
1.190	1.45	24.5	-33.6	17.26	43.21	54	-10.79	H
1.330	1.57	25.1	-33.6	19	45.67	54	-8.33	H
1.365	1.58	25.1	-33.6	16.09	42.77	54	-11.23	V
1.450	1.65	25.7	-33.6	14.75	42.10	54	-11.9	V
1.590	1.76	26.7	-33	11.9	40.36	54	-13.64	V

Note:

1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
2. The limits shown are based on Peak value and Average value detector above 1GHz, the bandwidth of Test Receiver was set at 1MHz above 1GHz.
3. The other emission levels are 20dB below the official limits that are not reported.

Test Equipment List:

Test Equipment	Model No.	Manufacturer	Serial No.	Last Cal.	Cal. Due
Receiver	SMR4503	SCHAFFNER	11725	2012.07.08	2013.07.07
Double-ridged Wave guide horn	3115	ETS	6587	2012.08.02	2013.08.01
Microwave system amplifier	83017A	Agilent	MY39500438	2012.07.11	2013.07.10
Biconilog Antenna	3142C	ETS	00042672	2012.09.28	2013.09.27
Band-pass Filter	BRM50702	Micro-Tronic	S/N-030	2012.11.30	2013.11.29
Spectrum Analyzer	FSP30	R&S	100755	2012.11.30	2013.11.29
HF Loop Antenna	HLA6120	TESEQ	26348	2012-10-11	2013-10-12
<i>Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.</i>					

TESTED BY: Severino **ECMG**
ENGINEER **COMPANY NAME**

REVIEWED BY: Janetym **ECMG**
SENIOR ENGINEER **COMPANY NAME**



Radiated Emission Test Set-up(9KHz-30MHz)



Radiated Emission Test Set-up(Below 1GHz)



Radiated Emission Test Set-up(Above 1GHz)



Radiated Emission Test Set-up (Rear View)