


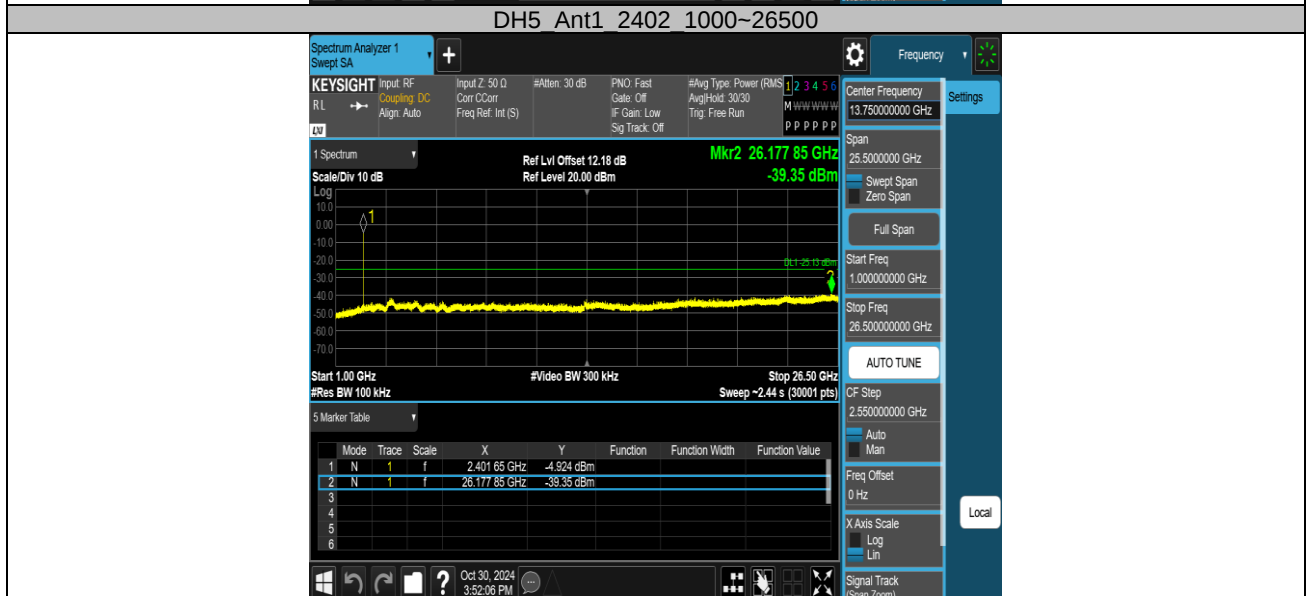
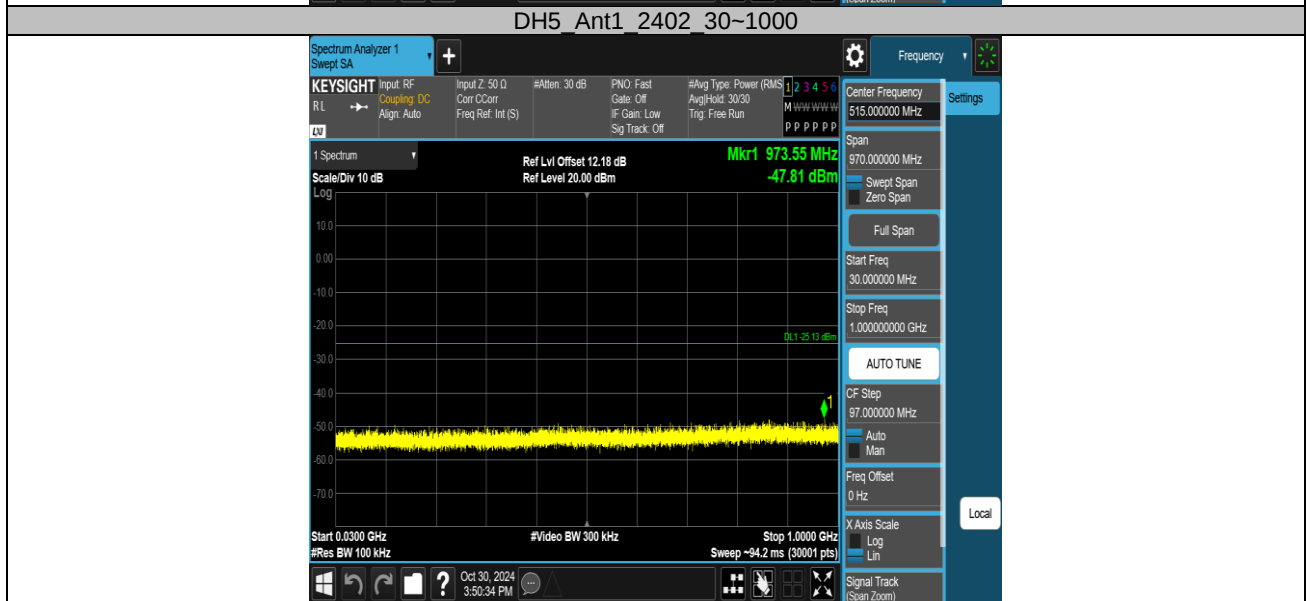
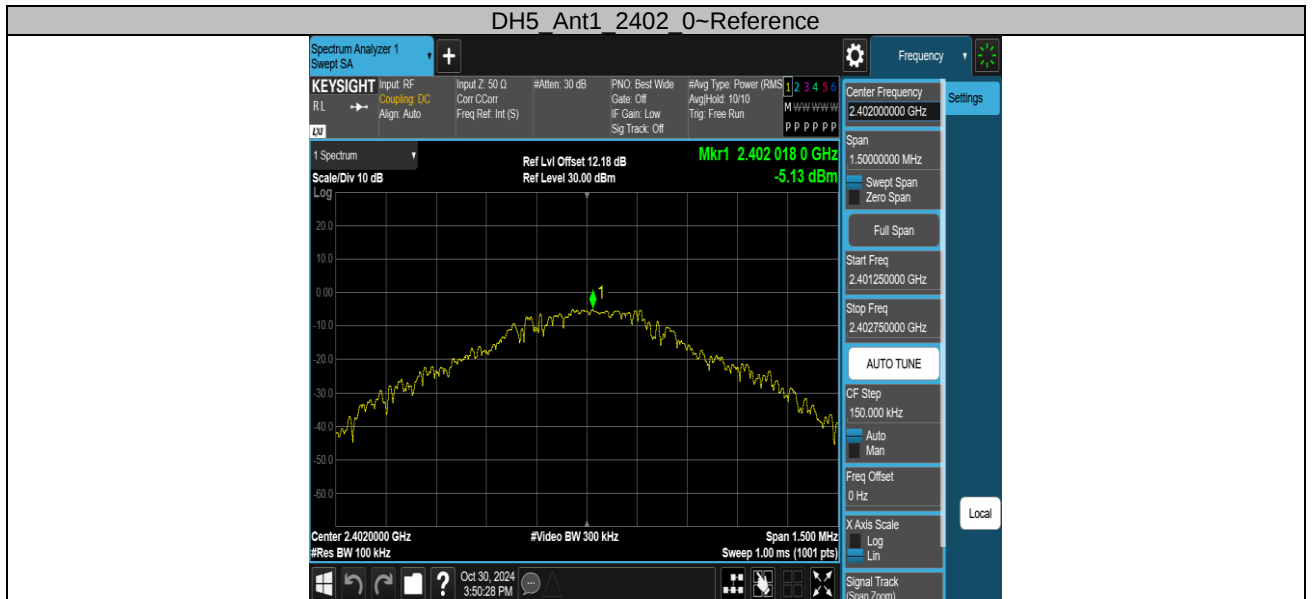
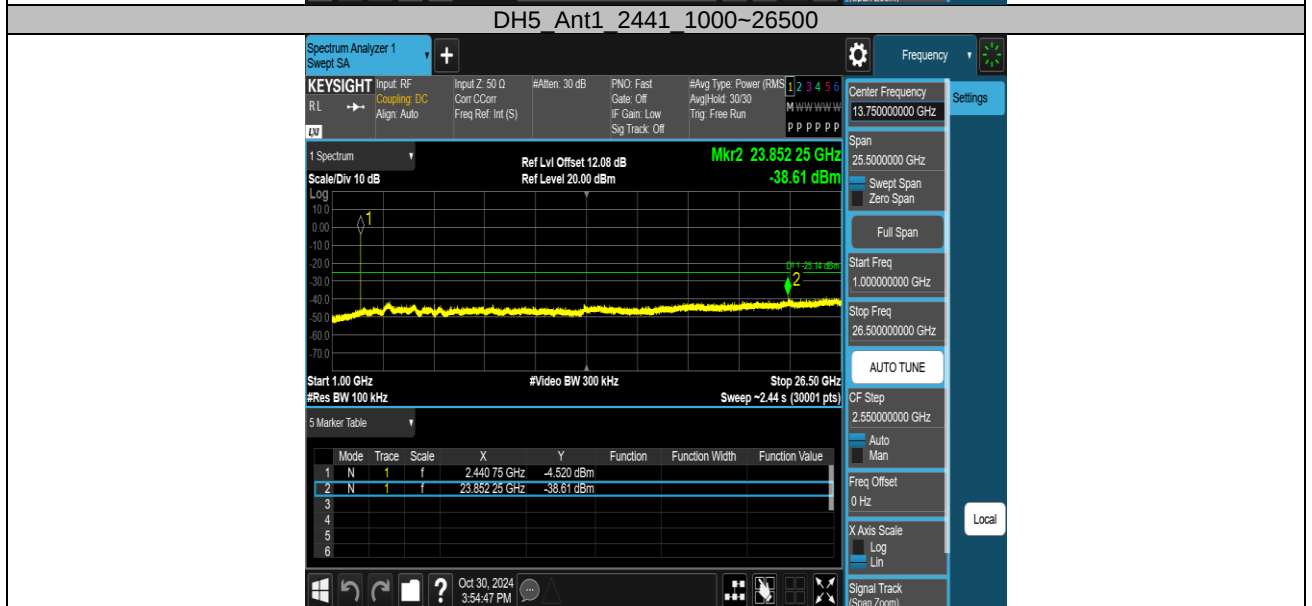




Conducted Spurious Emission

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	-5.13	-5.13	---	PASS
			30~1000	-5.13	-47.81	≤-25.13	PASS
			1000~26500	-5.13	-39.35	≤-25.13	PASS
		2441	Reference	-5.14	-5.14	---	PASS
			30~1000	-5.14	-47.28	≤-25.14	PASS
			1000~26500	-5.14	-38.61	≤-25.14	PASS
		2480	Reference	-5.87	-5.87	---	PASS
			30~1000	-5.87	-46.15	≤-25.87	PASS
			1000~26500	-5.87	-38.58	≤-25.87	PASS
3DH5	Ant1	2402	Reference	-7.87	-7.87	---	PASS
			30~1000	-7.87	-46.7	≤-27.87	PASS
			1000~26500	-7.87	-37.71	≤-27.87	PASS
		2441	Reference	-6.37	-6.37	---	PASS
			30~1000	-6.37	-47.71	≤-26.37	PASS
			1000~26500	-6.37	-38.32	≤-26.37	PASS
		2480	Reference	-8.70	-8.70	---	PASS
			30~1000	-8.70	-47.54	≤-28.7	PASS
			1000~26500	-8.70	-38.45	≤-28.7	PASS

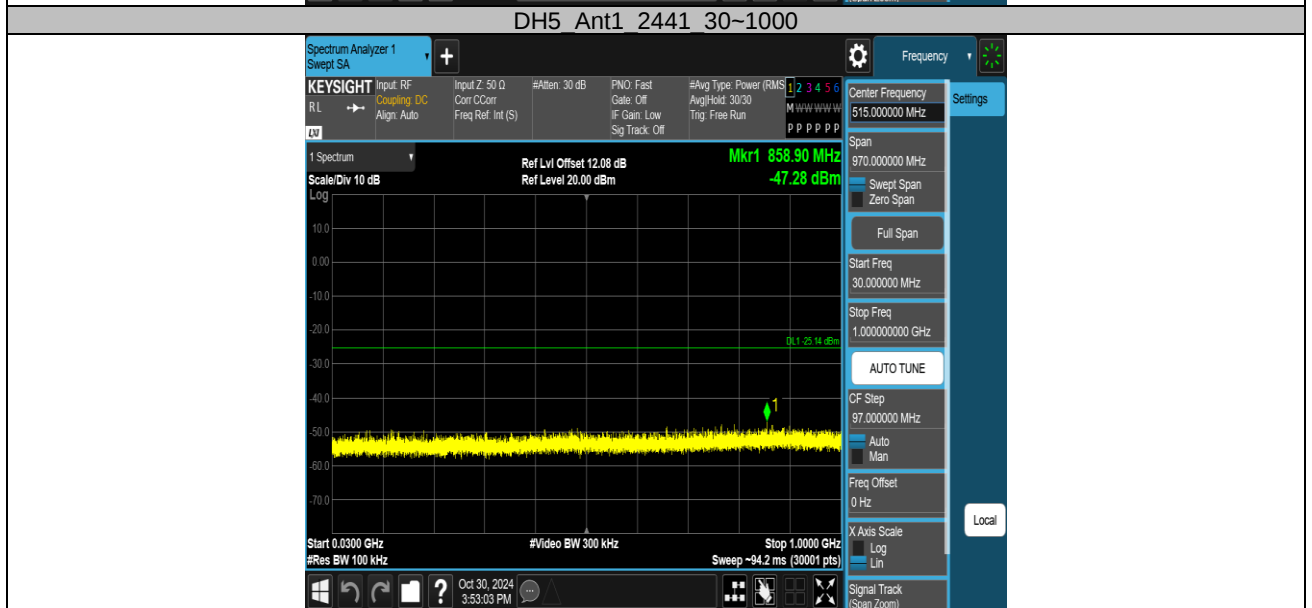

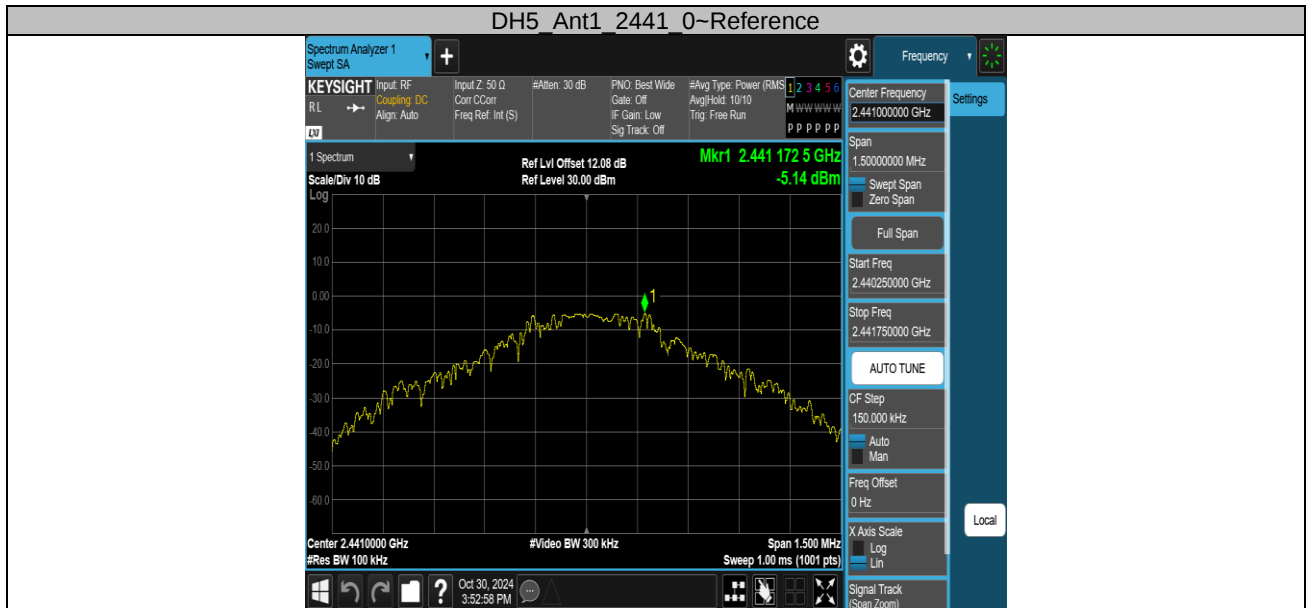

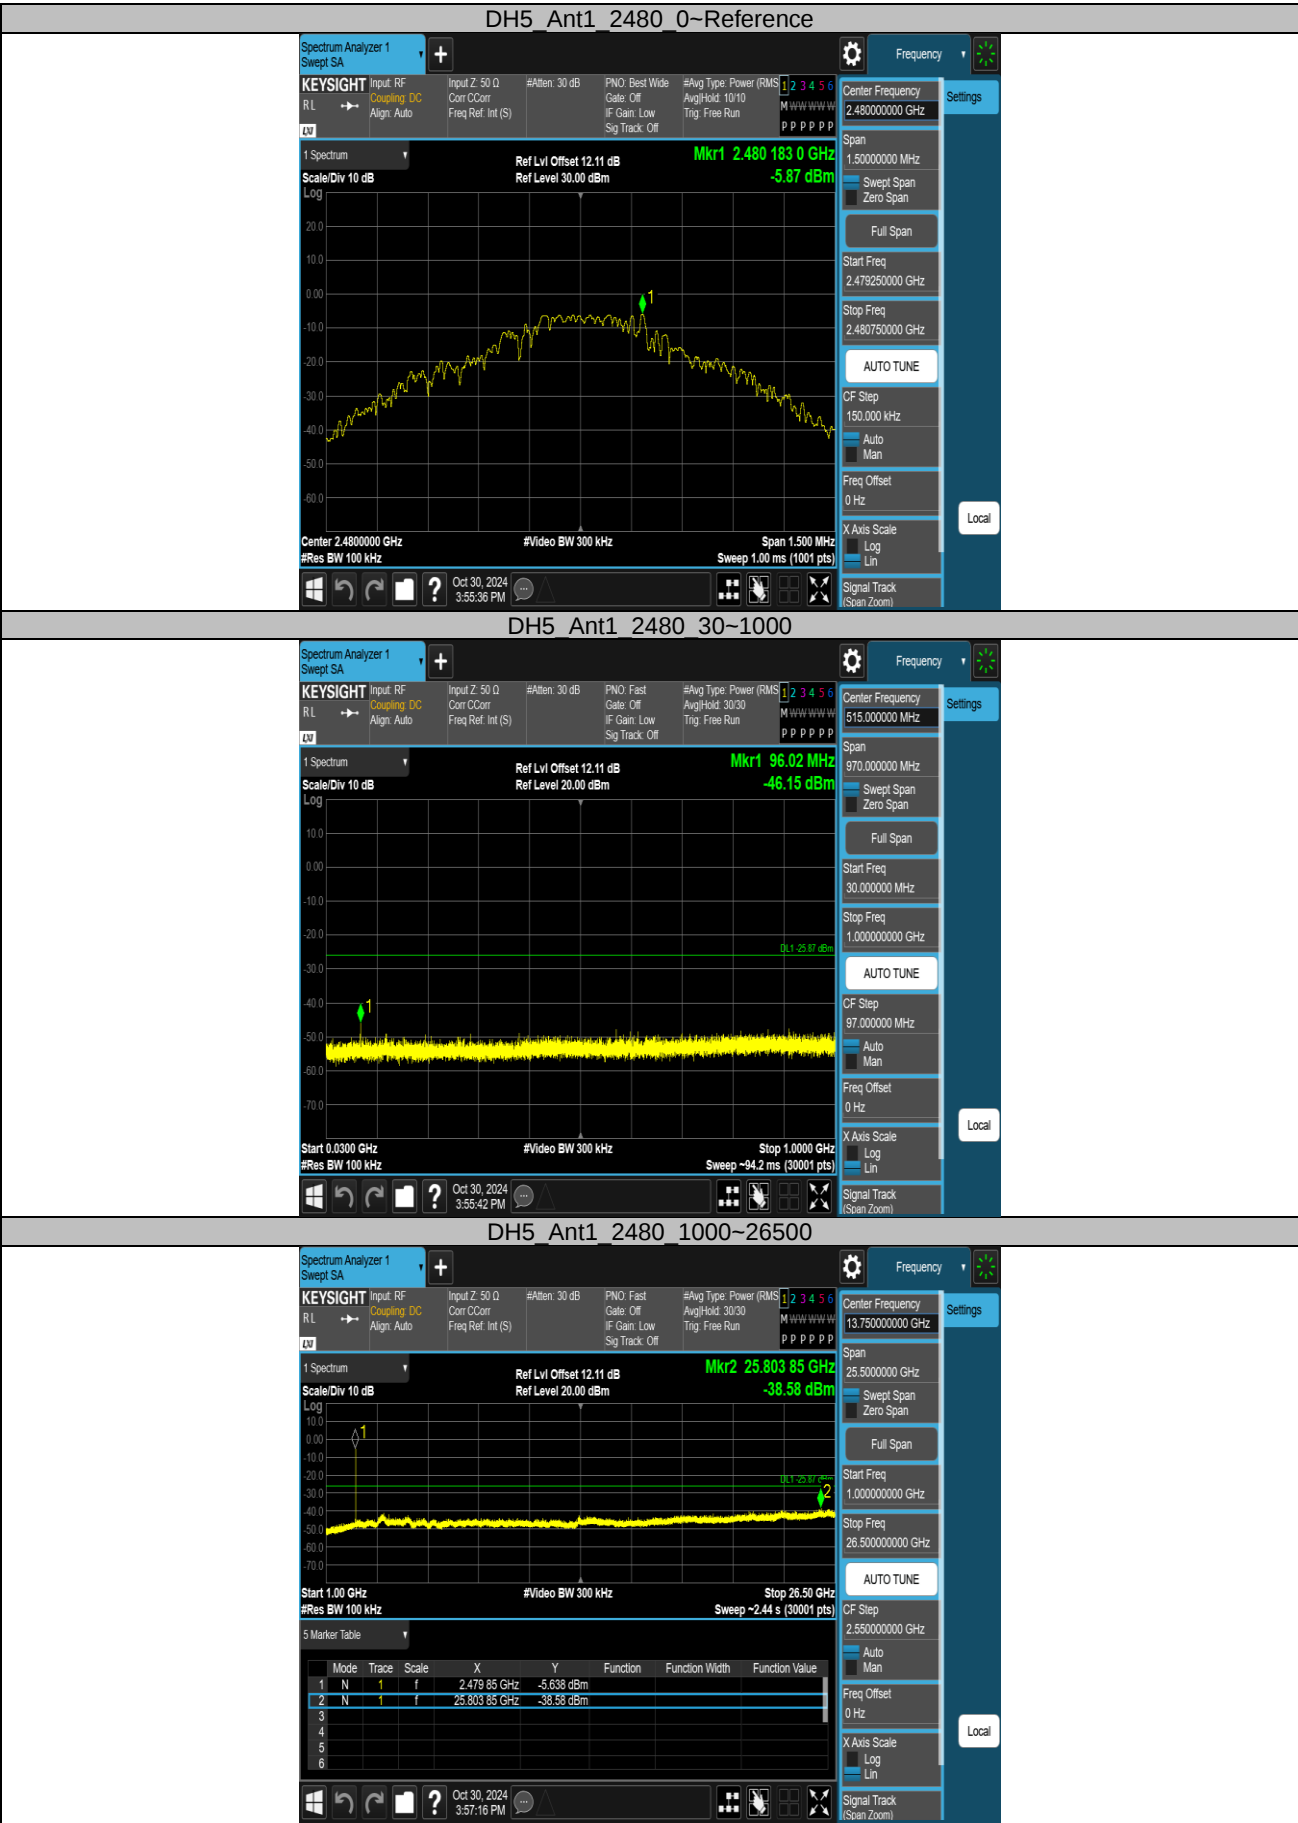

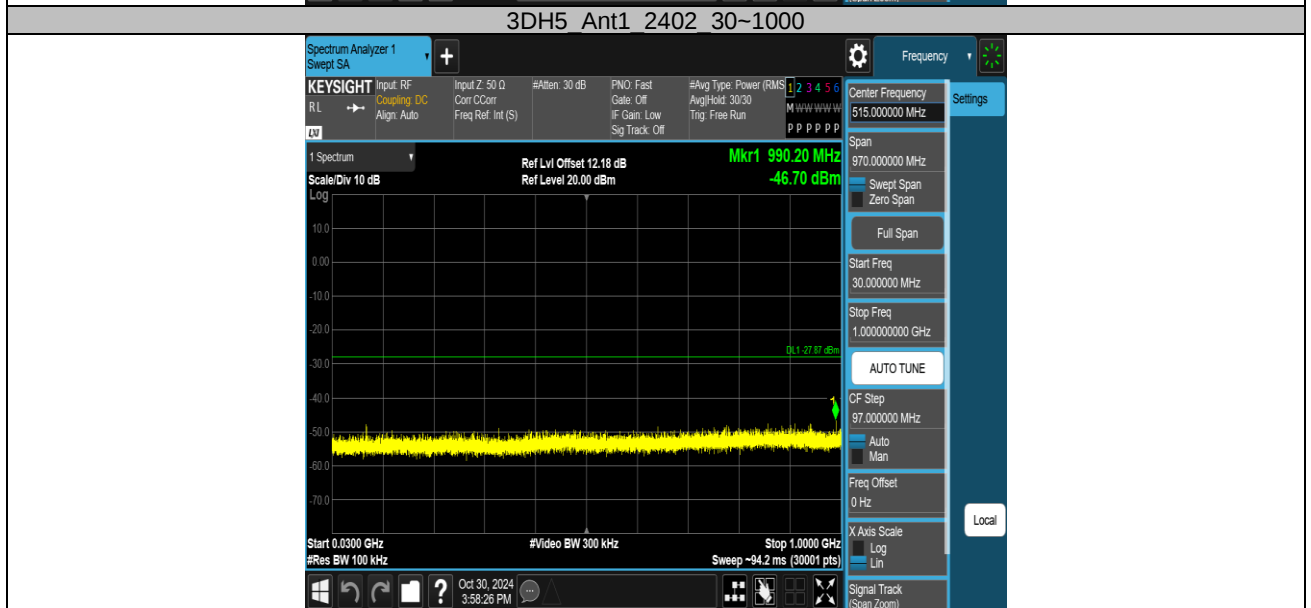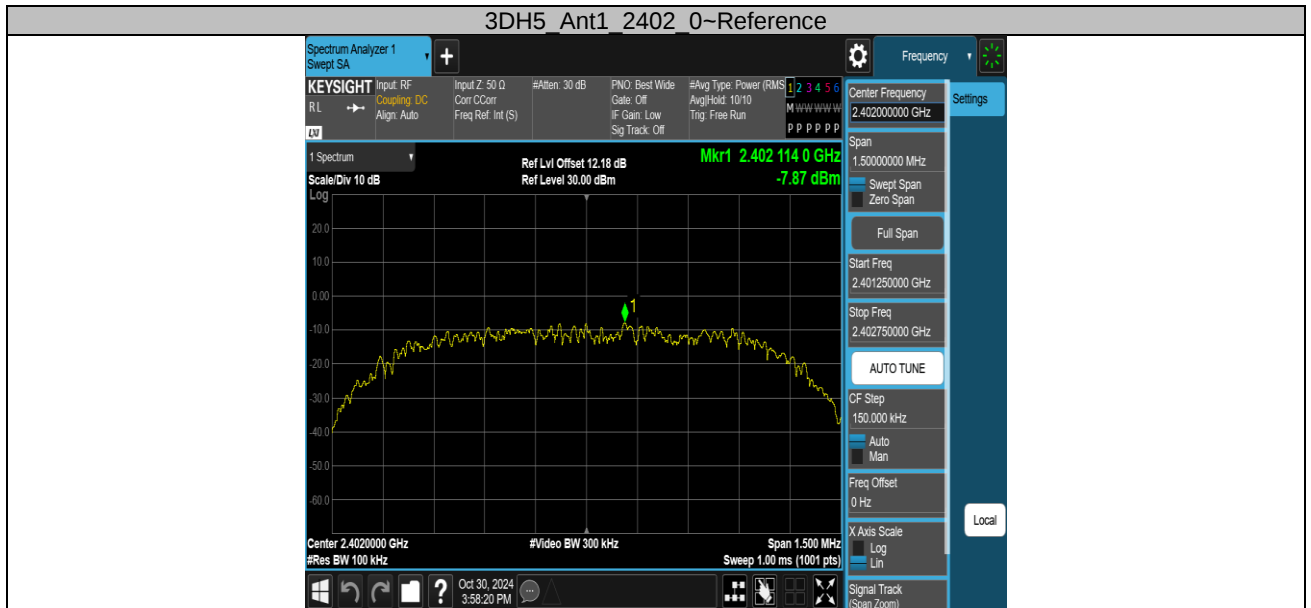





Appendix A.7: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz

EUT Information

EUT Name:	LED MINI SPEAKER
Model:	EE7873
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168508118/A003841318-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

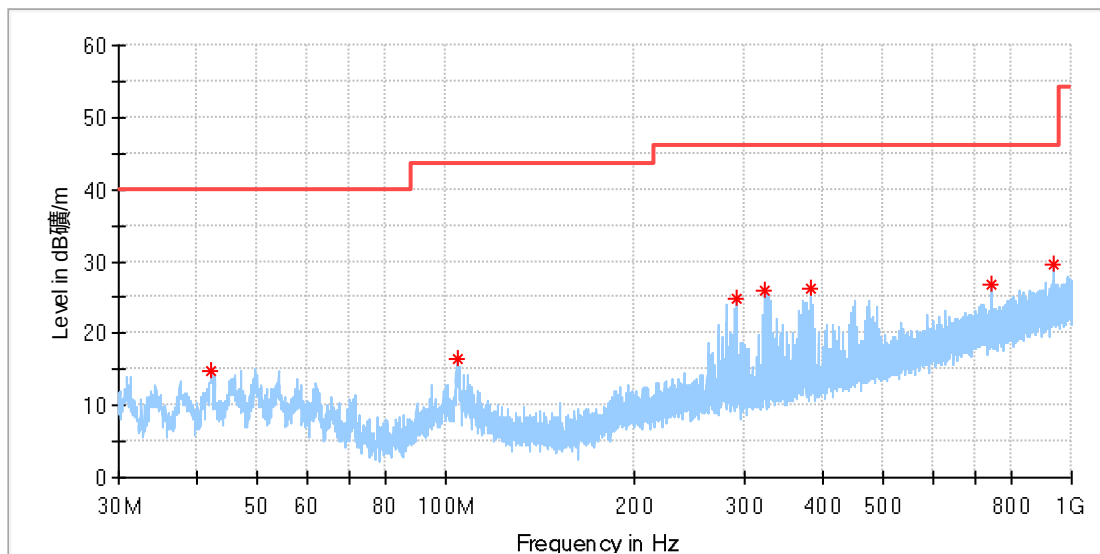

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.274231	14.90	40.00	25.10	100.0	H	214.0	-19.6
104.205000	16.57	43.50	26.93	100.0	H	189.0	-18.9
291.750769	24.83	46.00	21.17	100.0	H	58.0	-16.5
323.760769	25.82	46.00	20.18	100.0	H	231.0	-15.5
382.147308	26.12	46.00	19.88	100.0	H	247.0	-14.2
742.502308	26.91	46.00	19.09	100.0	H	317.0	-7.2
936.950000	29.57	46.00	16.43	100.0	H	91.0	-4.4

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	LED MINI SPEAKER
Model:	EE7873
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168508118/A003841318-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

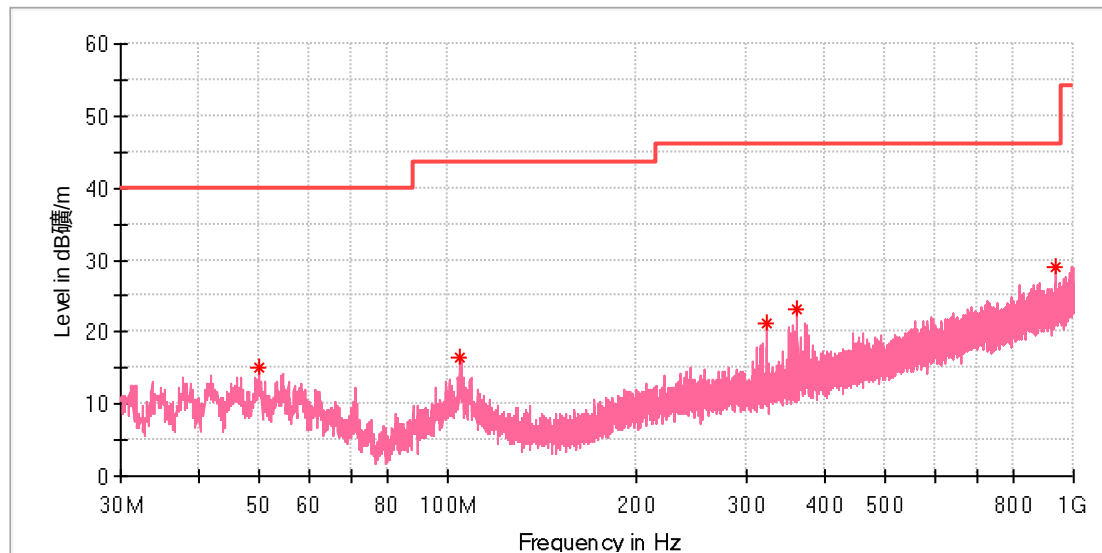

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.885000	14.98	40.00	25.02	100.0	V	40.0	-18.4
104.839231	16.35	43.50	27.15	100.0	V	296.0	-18.9
323.723462	21.11	46.00	24.89	100.0	V	73.0	-15.5
362.299615	23.04	46.00	22.96	100.0	V	122.0	-14.6
936.950000	28.95	46.00	17.05	100.0	V	50.0	-4.4

Final_Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	LED MINI SPEAKER
Model:	EE7873
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168508118/A003841318-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

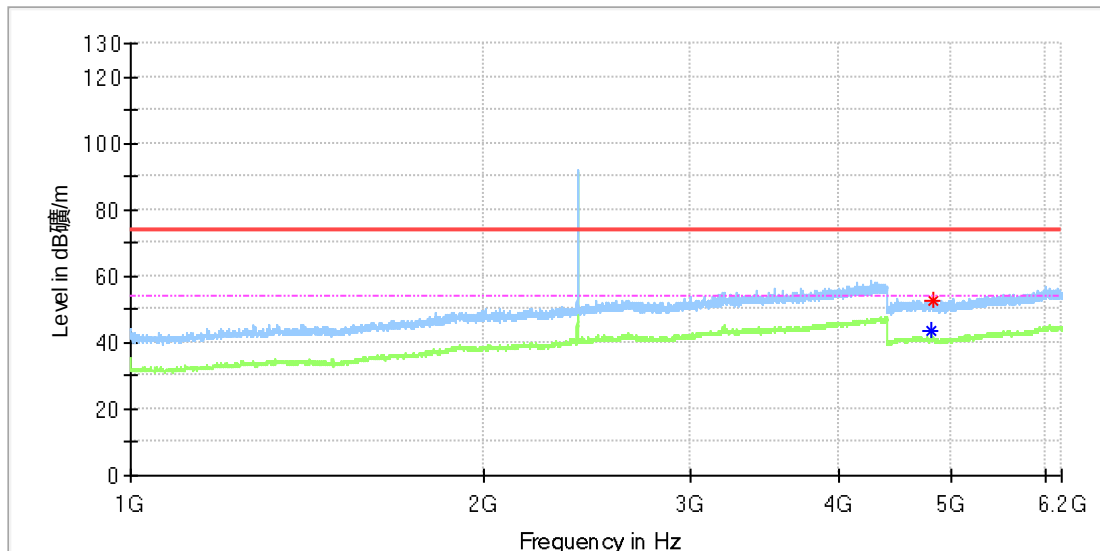

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4801.000000	---	43.54	54.00	10.46	150.0	H	62.0	13.3
4816.000000	52.86	---	74.00	21.14	150.0	H	154.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: LED MINI SPEAKER
Model: EE7873
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168508118/A003841318-003
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

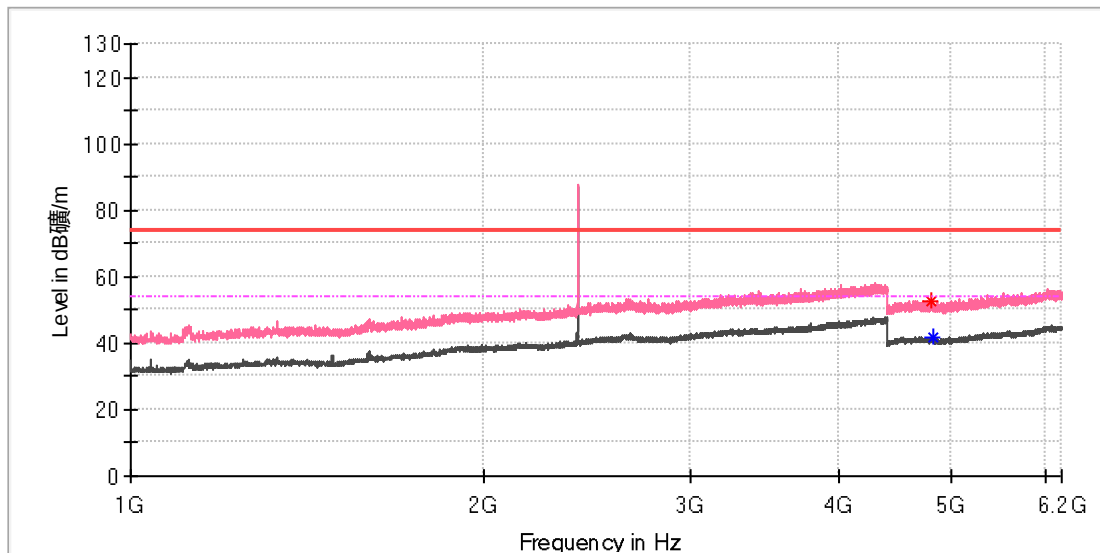

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4811.000000	52.82	---	74.00	21.18	150.0	V	26.0	13.3
4822.500000	---	41.70	54.00	12.30	150.0	V	242.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: LED MINI SPEAKER
Model: EE7873
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168508118/A003841318-003
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

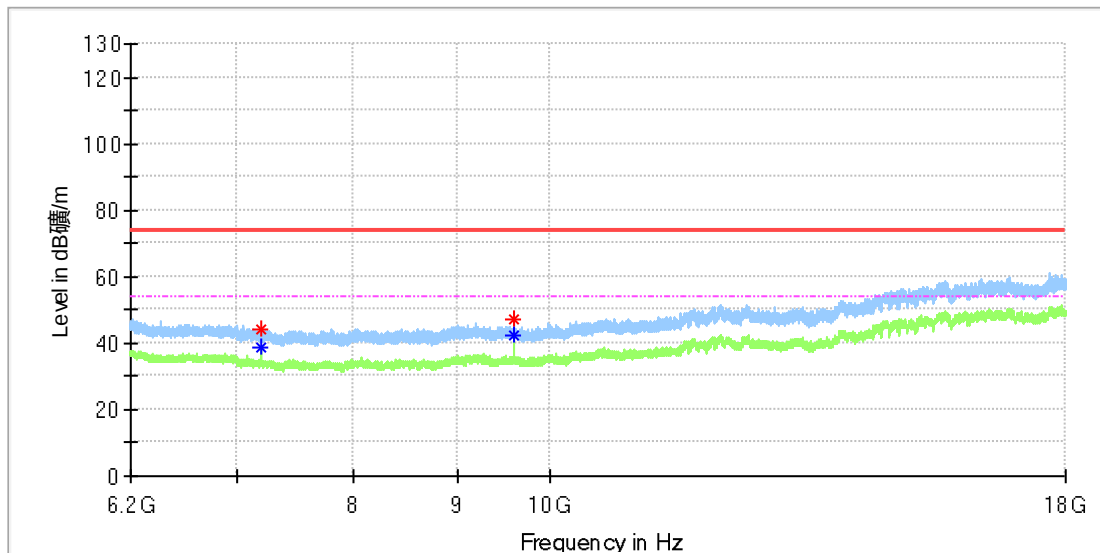

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7200.050000	44.17	---	74.00	29.83	150.0	H	249.0	8.8
7200.050000	---	38.46	54.00	15.54	150.0	H	249.0	8.8
9601.841667	46.95	---	74.00	27.05	150.0	H	203.0	10.4
9601.841667	---	42.06	54.00	11.94	150.0	H	203.0	10.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: LED MINI SPEAKER
Model: EE7873
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168508118/A003841318-003
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

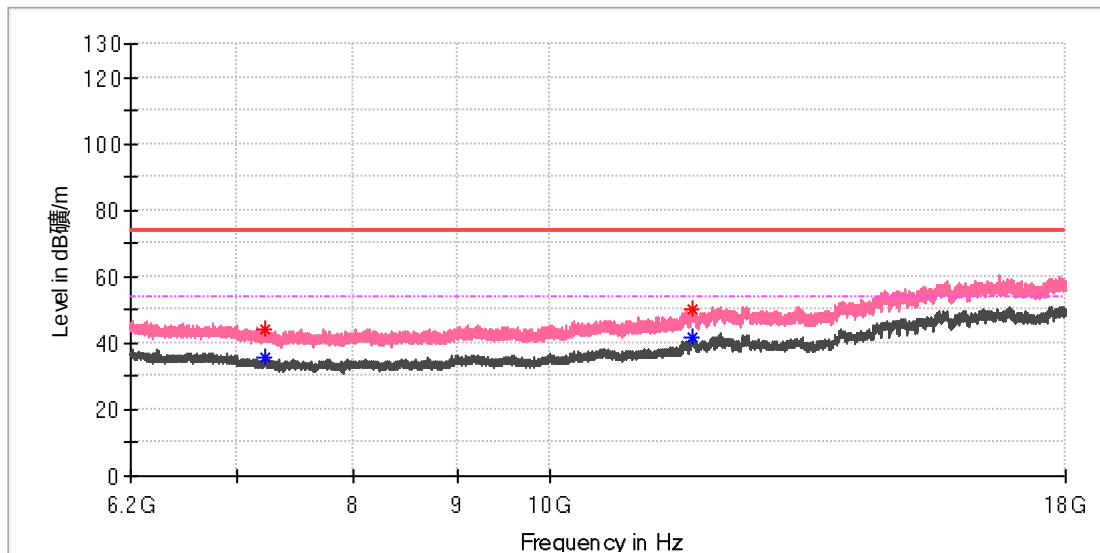

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7228.075000	---	35.60	54.00	18.40	150.0	V	138.0	8.7
7232.991667	43.91	---	74.00	30.09	150.0	V	39.0	8.6
11754.358333	---	41.68	54.00	12.32	150.0	V	14.0	15.5
11766.158333	50.25	---	74.00	23.75	150.0	V	150.0	15.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: LED MINI SPEAKER
Model: EE7873
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168508118/A003841318-003
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

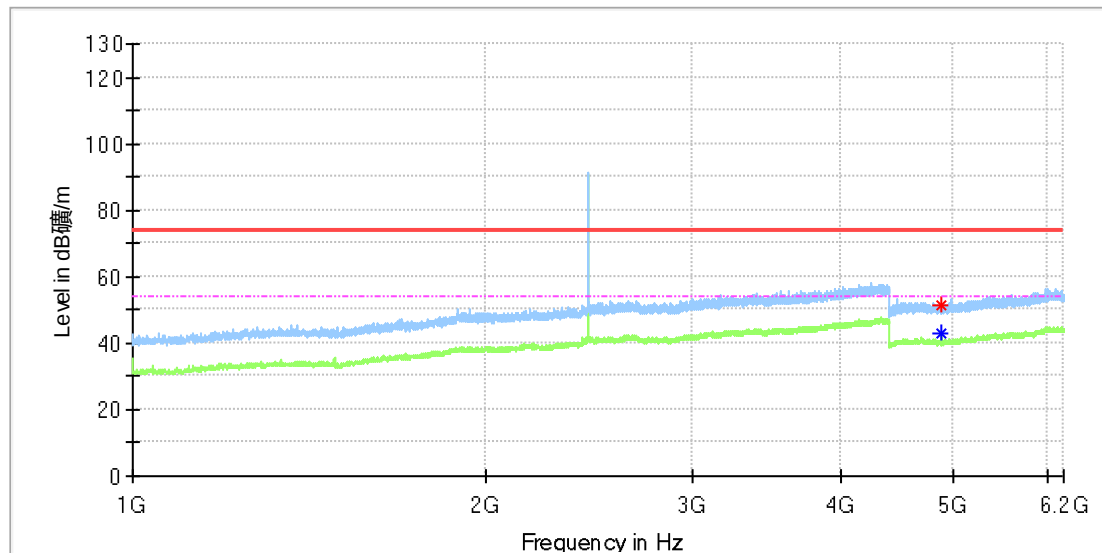

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4879.000000	---	42.70	54.00	11.30	150.0	H	158.0	13.3
4881.500000	51.23	---	74.00	22.77	150.0	H	259.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: LED MINI SPEAKER
Model: EE7873
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168508118/A003841318-003
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

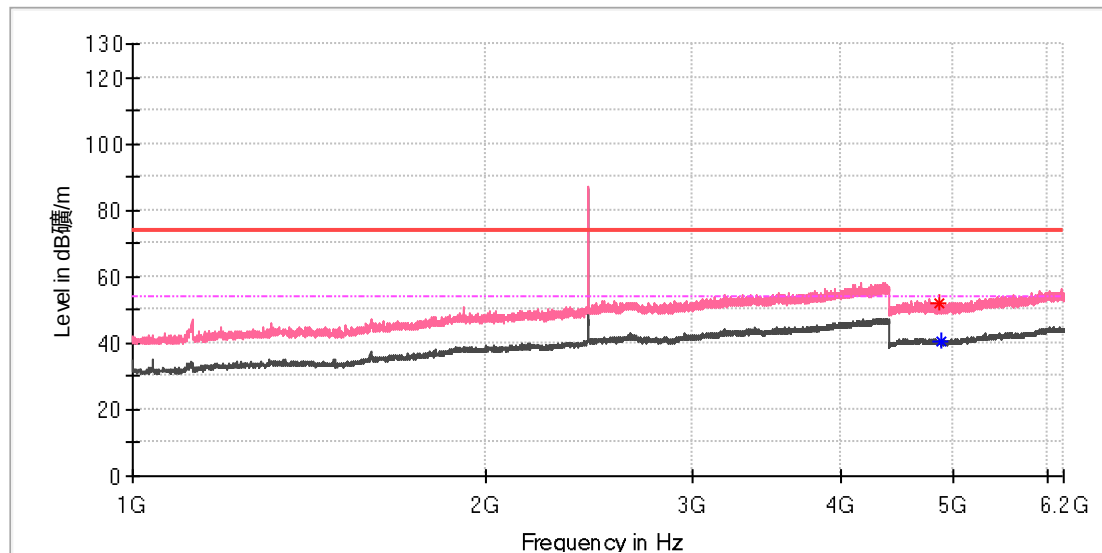

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4857.500000	52.20	---	74.00	21.80	150.0	V	159.0	13.3
4878.500000	---	40.64	54.00	13.36	150.0	V	18.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: LED MINI SPEAKER
Model: EE7873
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168508118/A003841318-003
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

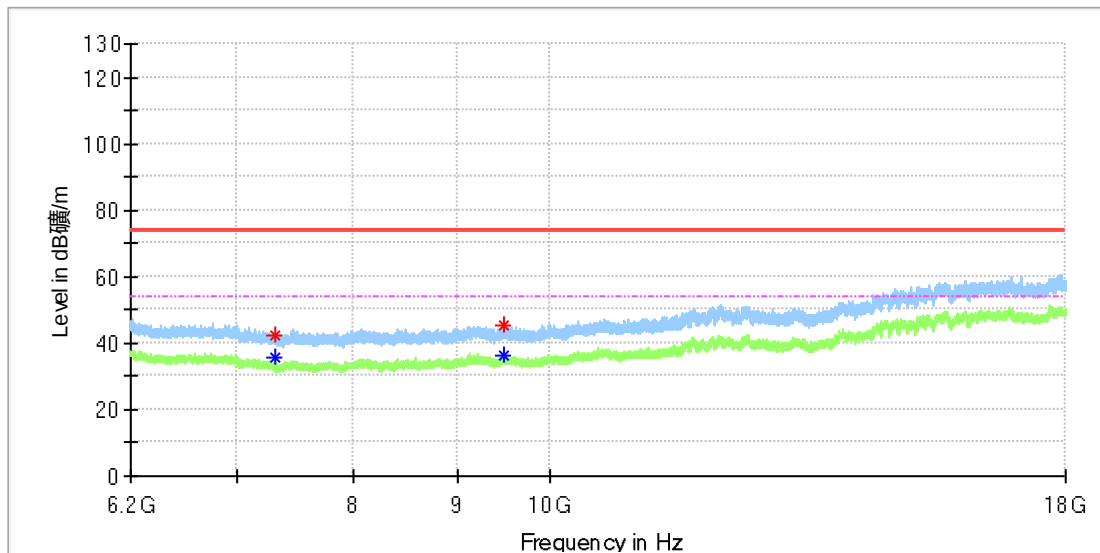

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7316.575000	42.62	---	74.00	31.38	150.0	H	194.0	8.2
7316.575000	---	35.72	54.00	18.28	150.0	H	194.0	8.2
9482.858333	45.54	---	74.00	28.46	150.0	H	83.0	9.9
9497.608333	---	36.14	54.00	17.86	150.0	H	3.0	9.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: LED MINI SPEAKER
Model: EE7873
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168508118/A003841318-003
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

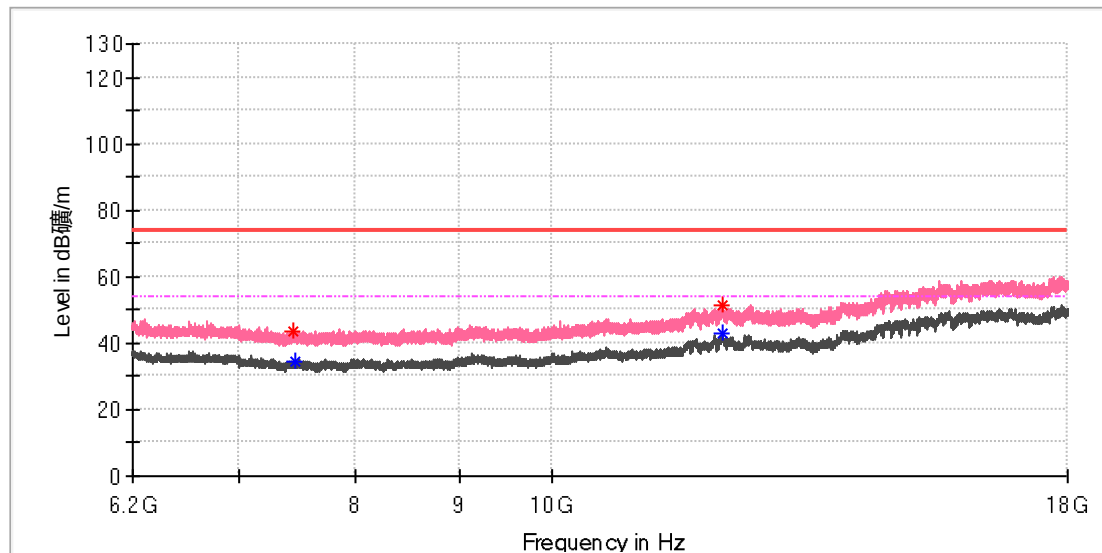

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7450.308333	43.74	---	74.00	30.26	150.0	V	327.0	8.5
7458.666667	---	34.42	54.00	19.58	150.0	V	0.0	8.5
12135.891667	51.57	---	74.00	22.43	150.0	V	278.0	16.4
12147.691667	---	42.80	54.00	11.20	150.0	V	231.0	16.7

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: LED MINI SPEAKER
Model: EE7873
Test Mode: BR_DH5_High channel
Order No/Sample No: 168508118/A003841318-003
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

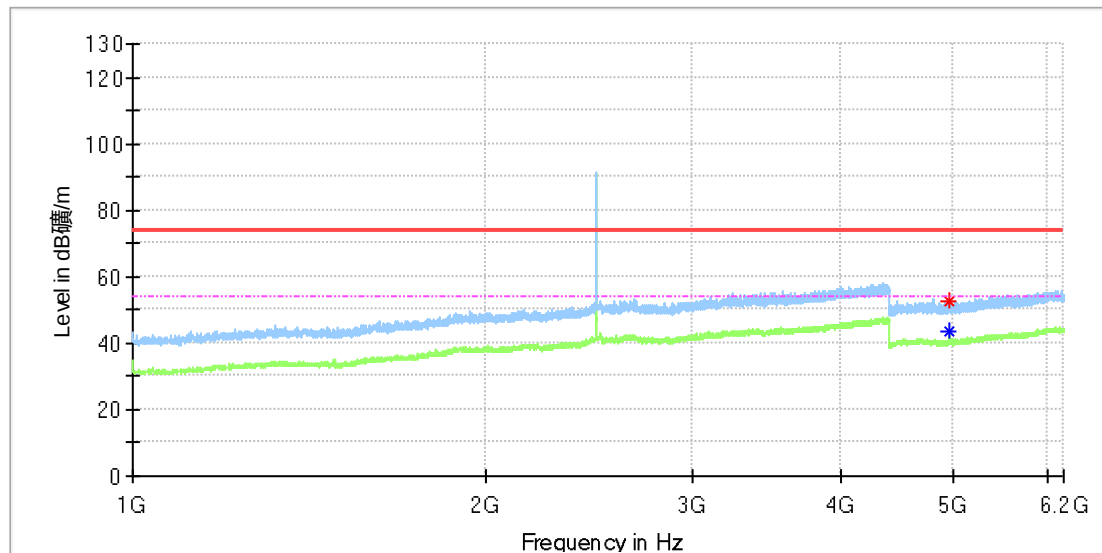

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4957.000000	---	43.48	54.00	10.52	150.0	H	146.0	13.3
4959.500000	52.36	---	74.00	21.64	150.0	H	140.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: LED MINI SPEAKER
Model: EE7873
Test Mode: BR_DH5_High channel
Order No/Sample No: 168508118/A003841318-003
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

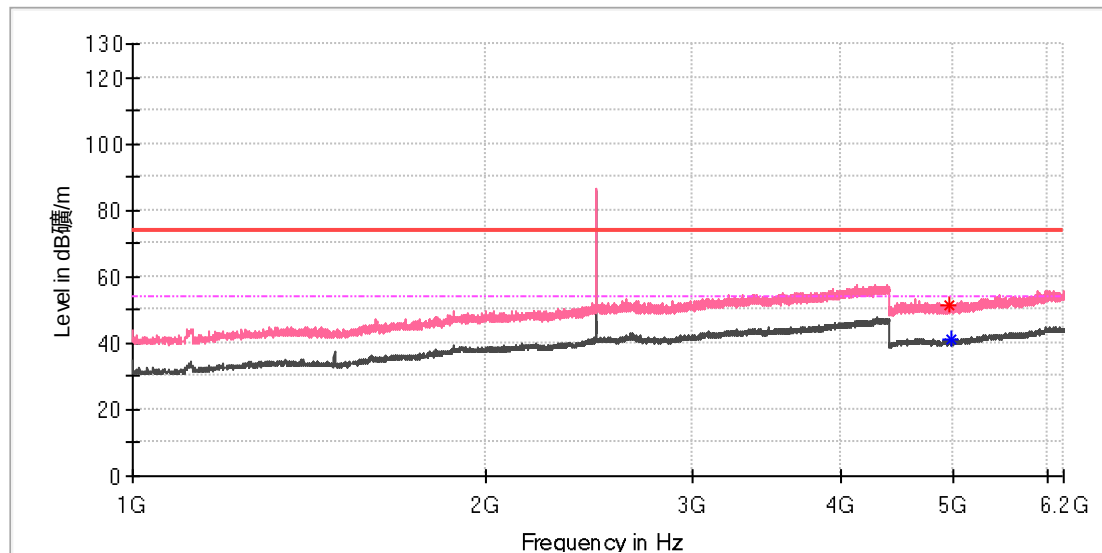

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4961.000000	51.63	---	74.00	22.37	150.0	V	102.0	13.3
4977.500000	---	41.02	54.00	12.98	150.0	V	265.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: LED MINI SPEAKER
Model: EE7873
Test Mode: BR_DH5_High channel
Order No/Sample No: 168508118/A003841318-003
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

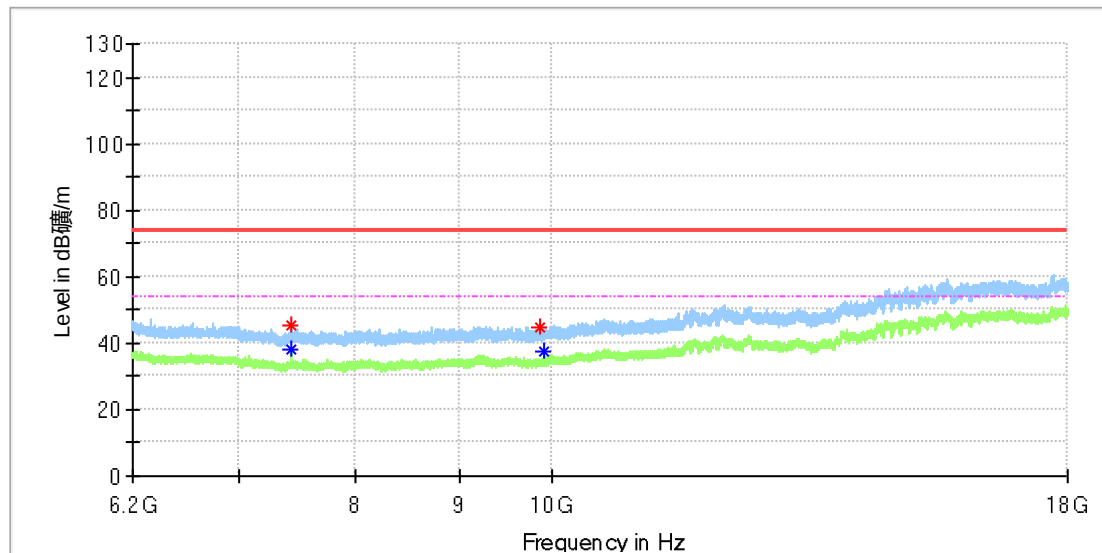

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7434.083333	---	37.99	54.00	16.01	150.0	H	268.0	8.4
7434.083333	45.33	---	74.00	28.67	150.0	H	268.0	8.4
9854.558333	44.83	---	74.00	29.17	150.0	H	167.0	10.6
9914.050000	---	37.67	54.00	16.33	150.0	H	37.0	10.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: LED MINI SPEAKER
Model: EE7873
Test Mode: BR_DH5_High channel
Order No/Sample No: 168508118/A003841318-003
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

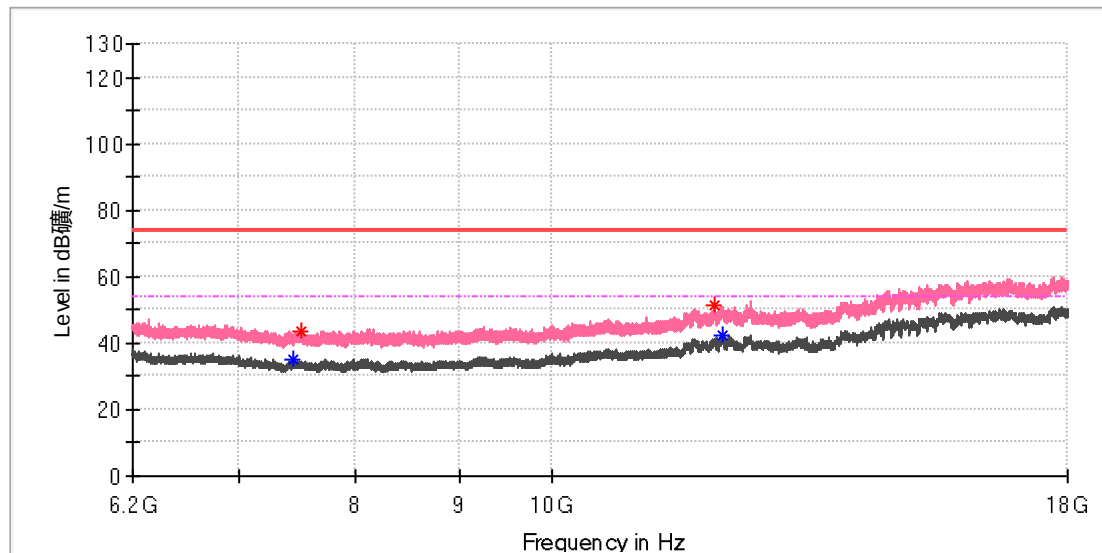

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7452.766667	---	34.81	54.00	19.19	150.0	V	139.0	8.5
7521.108333	43.67	---	74.00	30.33	150.0	V	295.0	8.7
12047.883333	51.58	---	74.00	22.42	150.0	V	0.0	16.4
12136.383333	---	42.26	54.00	11.74	150.0	V	187.0	16.4


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.8: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	LED MINI SPEAKER
Model:	EE7873
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168508118/A003841318-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

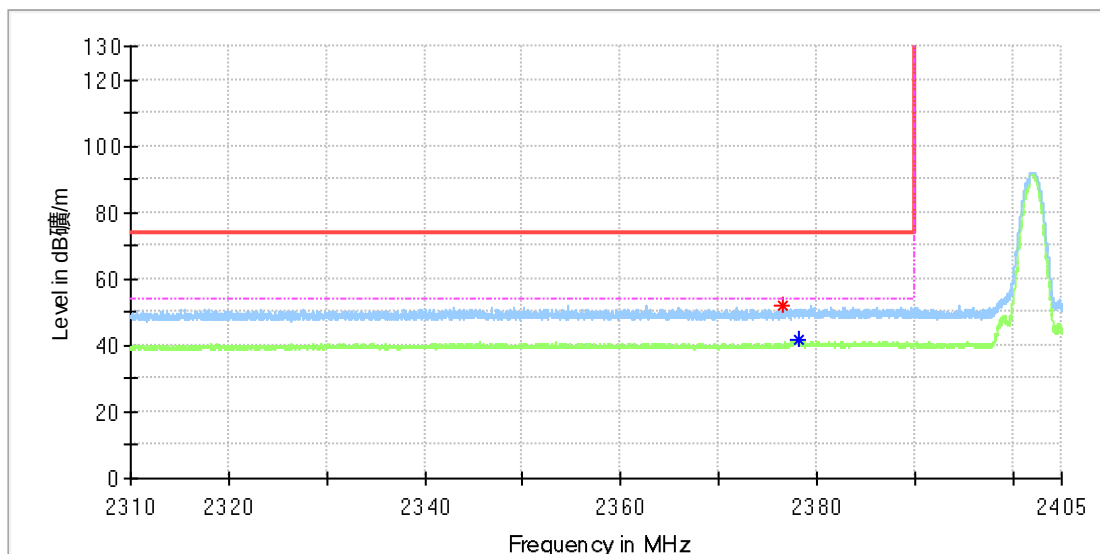

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2376.602941	51.90	---	74.00	22.10	150.0	H	119.0	8.5
2378.102941	---	41.75	54.00	12.25	150.0	H	225.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: LED MINI SPEAKER
Model: EE7873
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168508118/A003841318-003
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

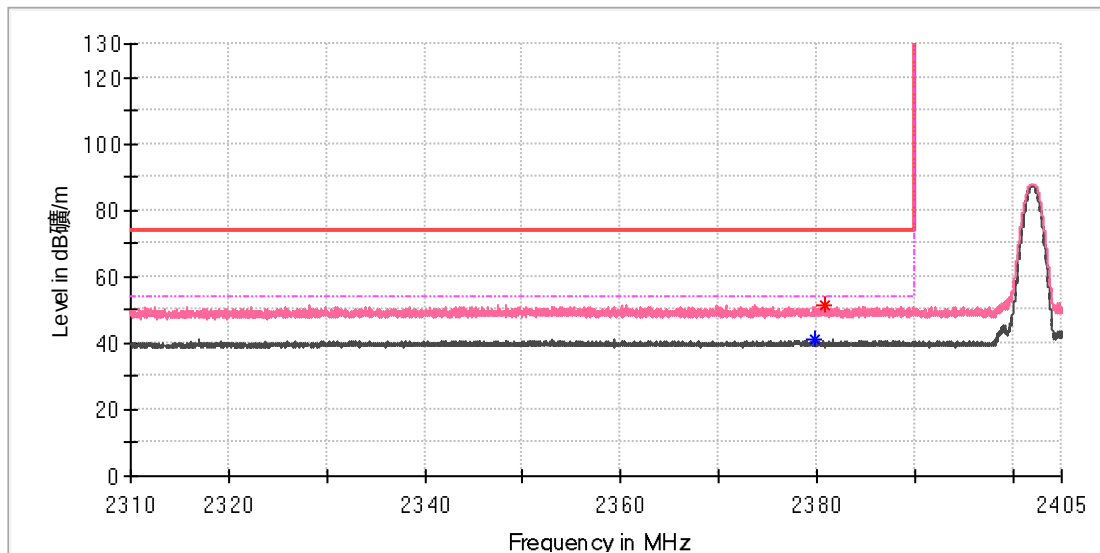

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2379.897059	---	41.22	54.00	12.78	150.0	V	59.0	8.5
2380.838235	51.70	---	74.00	22.30	150.0	V	324.0	8.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: LED MINI SPEAKER
Model: EE7873
Test Mode: BR_DH5_High channel
Order No/Sample No: 168508118/A003841318-003
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

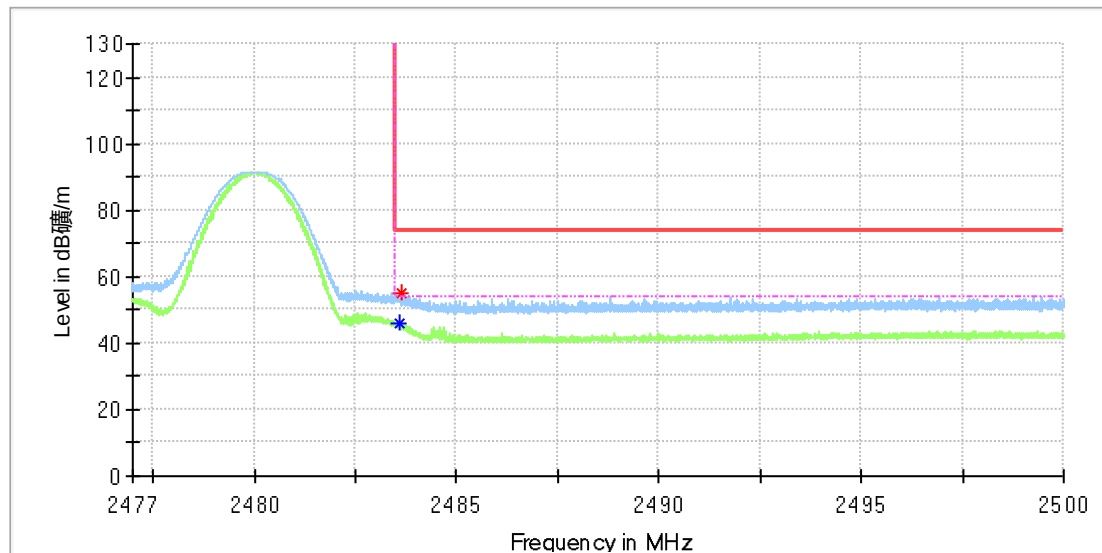

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.584559	---	46.19	54.00	7.81	150.0	H	314.0	9.0
2483.628677	55.06	---	74.00	18.94	150.0	H	286.0	9.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: LED MINI SPEAKER
Model: EE7873
Test Mode: BR_DH5_High channel
Order No/Sample No: 168508118/A003841318-003
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

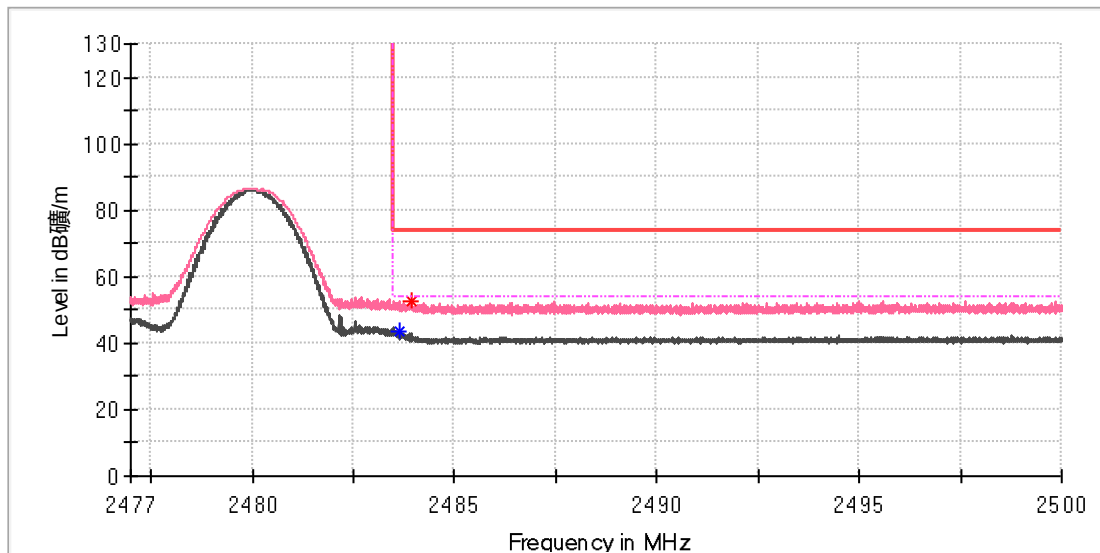

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.658088	---	43.34	54.00	10.66	150.0	V	329.0	9.0
2483.915441	52.72	---	74.00	21.28	150.0	V	14.0	9.0


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.9: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name: LED MINI SPEAKER
Order Number: 168508118
Model: EE7873
Test Mode: BT Link
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15
Test By:/Review By: Aric Wang / Shower Dai
Tem./Hum./Pressure: 24.2°C/52.2%/101kPa
Remark: SR3

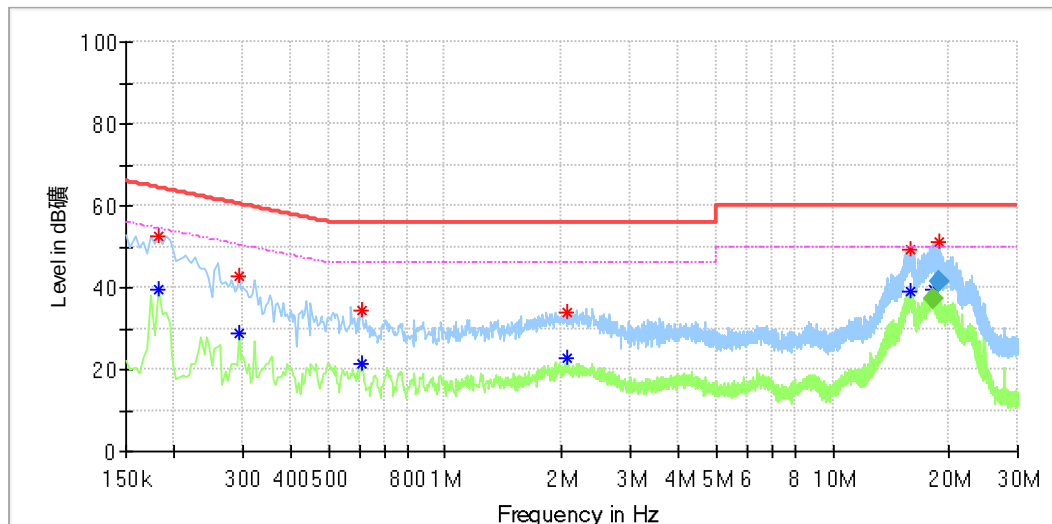

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.182000	52.51	---	64.39	11.88	L1	9.9
0.182000	---	39.40	54.39	14.99	L1	9.9
0.294000	42.97	---	60.41	17.44	L1	9.9
0.294000	---	29.01	50.41	21.40	L1	9.9
0.606000	34.28	---	56.00	21.72	L1	10.0
0.610000	---	21.54	46.00	24.46	L1	10.0
2.070000	34.02	---	56.00	21.98	L1	10.1
2.070000	---	22.67	46.00	23.33	L1	10.1
15.782000	49.34	---	60.00	10.66	L1	10.4
15.782000	---	38.86	50.00	11.14	L1	10.4
18.250500	---	39.74	50.00	10.26	L1	10.4
18.790500	51.24	---	60.00	8.76	L1	10.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
18.250500	---	37.30	50.00	12.70	1000.0	9.000	L1	10.4
18.790500	41.62	---	60.00	18.38	1000.0	9.000	L1	10.4

EUT Information

EUT Name: LED MINI SPEAKER
Order Number: 168508118
Model: EE7873
Test Mode: BT Link
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15
Test By:/Review By: Aric Wang / Shower Dai
Tem./Hum./Pressure: 24.2°C/52.2%/101kPa
Remark: SR3

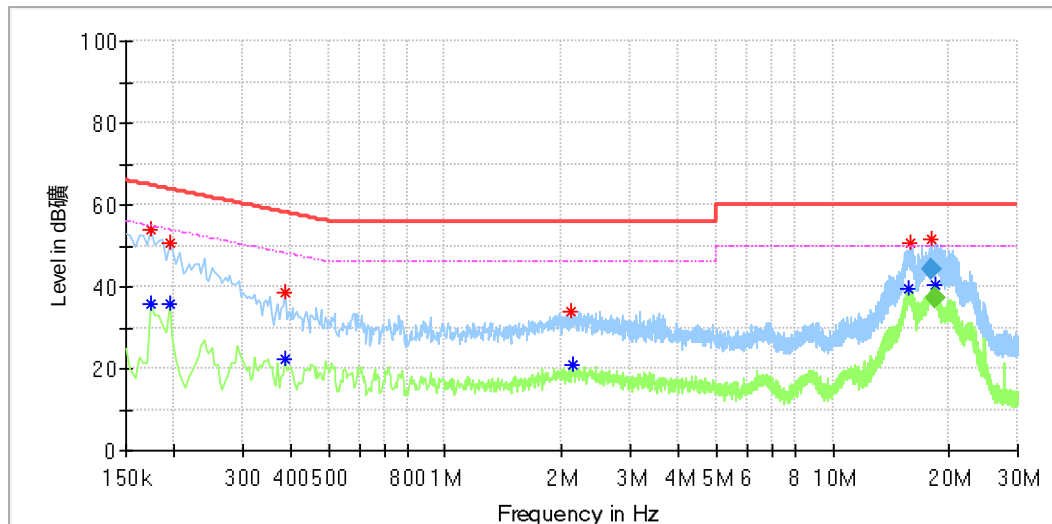

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.174000	54.11	---	64.77	10.66	N	9.8
0.174000	---	36.00	54.77	18.77	N	9.8
0.194000	---	35.62	53.86	18.24	N	9.8
0.194000	50.93	---	63.86	12.94	N	9.8
0.386000	38.74	---	58.15	19.41	N	9.8
0.386000	---	22.41	48.15	25.74	N	9.8
2.098000	33.73	---	56.00	22.27	N	9.9
2.130000	---	20.82	46.00	25.18	N	9.9
15.670000	---	39.58	50.00	10.42	N	10.1
15.798000	50.65	---	60.00	9.35	N	10.1
17.925500	51.40	---	60.00	8.60	N	10.2
18.422500	---	40.57	50.00	9.43	N	10.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
17.925500	44.30	---	60.00	15.70	1000.0	9.000	N	10.2
18.422500	---	37.33	50.00	12.67	1000.0	9.000	N	10.2