



America

Choose certainty.
Add value.

Report On

RF Exposure MPE Evaluation
Viableware, Inc. (DBA TableSafe)
Model: TS-CS5

FCC Part 1.1310 and Part 2.1091
KDB 680106 D01 V02

Report No. RD72128524.300

November 2017



America

TÜV SÜD America Inc., 2320 Presidential Drive Ste. 101, Durham, NC 27703
Tel: (919) 381-4235. Website: www.TUVamerica.com

REPORT ON RF Exposure MPE Evaluation
Viableware, Inc.
Model: TS-CS5
FCC ID: 2AAUJ-C002

TEST REPORT NUMBER RD72128524.300

REPORT DATE November 17, 2017

PREPARED FOR Viableware, Inc.
12220 - 113th Ave, NE Suite 210
Kirkland, WA 98034

CONTACT PERSON Joshua Pederson
Hardware Program Manager
206-516-6108
jpederson@tablesafe.com

PREPARED BY

A handwritten signature in black ink, appearing to read "Randle Sherian".

Randle Sherian
Title: EMC Lab Manager, RTP

APPROVED BY

A handwritten signature in black ink, appearing to read "Jean Tezil".

Jean Tezil
Title: Wireless Test Engineer

DATED November 17, 2017



America

TÜV SÜD America Inc., 2320 Presidential Drive Ste. 101, Durham, NC 27703
Tel: (919) 381-4235. Website: www.TUVamerica.com

Revision History

Report Number: RD72128524.300					
Client Name: Viableware, Inc.					
Client Model: TS-CS5					
DATE	OLD REVISION	NEW REVISION	REASON	PAGES AFFECTED	APPROVED BY
November 17, 2017	Initial Release	.300			J. Tezil

TABLE OF CONTENTS

1.1	Introduction	6
1.2	Brief Summary of Results.....	6
1.3	Product Information	7
1.3.1	EUT General Description	7
1.4	EUT Test configuration	8
1.4.1	Test Configuration Description.....	8
1.4.2	EUT Exercise Software	8
1.4.3	Support Equipment and I/O cables	8
1.4.4	Simplified Test Configuration Diagram	8
1.5	Maximum Permissible Exposure (MPE) Limits	9
1.5.1	FCC Part 1.1310 MPE Limits	9
1.6	Deviations from the Standard	10
1.7	Test Methodology	10
1.8	Test Facility.....	10
1.8.1	FCC – Site Registration	10
1.8.2	Canadian ISED Site Registration.....	10
1	FIELD STRENGTH TEST DETAILS.....	11
2.1	Field Strength Level.....	12
2.1.1	Specification Reference	12
2.1.2	Test Methodology.....	12
2.1.3	Test Limits	12
2.1.4	Equipment Under Test and Modification State	12
2.1.5	Date of Test/Test Engineer's Initials	12
2.1.6	Test Equipment Used.....	12
2.1.7	Environmental Conditions	12
2.1.8	Test Results	12
2.1.9	Test Setup Photo	21
2	TEST EQUIPMENT USED	23
3.1	Test Equipment Used	24
3.2	Measurement Uncertainty	25
3.2.1	MU for Magnetic Field Strength Measurement	25
3.2.2	MU for Electric Field Strength Measurement	25
3	ACCREDITATION, DISCLAIMERS AND COPYRIGHT.....	26
4.1	Accreditation, Disclaimers and Copyright.....	27

SECTION 1

1.1 INTRODUCTION

The information contained in this report is intended to show conformance of the Viableware Inc model TS-CS5 to the requirements of the FCC Part 1.1310, Part 2.1091 and KDB 680106 D01 v02 which provides the exposure limits and test procedure.

Objective	To perform magnetic and electric field strength measurements to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Viableware, Inc.
Model Name	Rail Charger
Model Number(s)	TS-CS5
Serial Number(s)	Sample #22
Number of Samples Tested	1
Date sample(s) received	March 21, 2017
Highest Frequency Generated or Used	132kHz
Input Voltage Used/Verified	120VAC/60Hz
Test Specifications	KDB 680106 D01 v02
Test Start Date	November 14, 2017
Test End Date	November 14, 2017
Name of Engineer(s)	Jean Tezil
Related Document(s)	None

1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with standards listed in Section 1.1 is shown below.

Emissions Product Standards			
Standard	Test Description	Test Level/Limits	Results
FCC Part 1.1310	Electric Field	614 V/m	Pass
FCC Part 1.1310	Magnetic Field	1.63 A/m	Pass

1.3 PRODUCT INFORMATION

1.3.1 EUT General Description

The TS-CS5 is comprised of 5 wireless charging ports. It is based on the Qi standard, version 1.0.2 for wireless power transfer, a loosely coupled inductive charging system. The dock contains transmitter design A1 of the Qi specification which is basically a series loaded LC resonant half bridge converter which operates within 110kHz to 205kHz to provide 5W of power to the receiver circuit. Due to the nature of the LC resonance, a quasi-sinusoidal current waveform is induced in the receiver coil, which is full-wave rectified. This power is then used to feed the battery charger. The whole system can be seen as a 'smart transformer' with loosely coupled primary and secondary windings.

The transmitter and receiver communicate by modulating the power signal with a specific protocol to monitor energy transmission to achieve a target system efficiency and thus control the power transmitter using PWM signals. Both transmitter and receiver are capable of measuring power and thus perform various system control strategies, e.g. efficiency, foreign object detection and fault detection.



Photo 1.3.1-1 - Front View



Photo 1.3.1-2 - Rear View

1.4 EUT TEST CONFIGURATION

1.4.1 Test Configuration Description

Test Configuration	Description
Default	The EUT had a RAIL with a discharged battery (5 each) installed into each wireless charging slot to produce maximum output charge state which is worst-case. All 5 wireless charging pads were actively charging at the same time during the evaluation.

1.4.2 EUT Exercise Software

No special software was used as the EUT was tested in a normal operating mode.

1.4.3 Support Equipment and I/O cables

Manufacturer	Equipment/Cable	Description
TableSafe, Inc	Equipment	EUT
TableSafe, Inc	Equipment	Test RAILS with discharged battery.
N/A	Cable	Power Cable

1.4.4 Simplified Test Configuration Diagram

As the EUT was tested in a standalone fashion, a connection diagram was not necessary.

1.5 MAXIMUM PERMISSIBLE EXPOSURE (MPE) LIMITS

1.5.1 FCC Part 1.1310 MPE Limits

In accordance with FCC Part 1.1310, the limits are as follows:

Table 1.5.1-1 –FCC Part 1.1310 Limits

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (Minutes)
(A) Limits For Occupational / Control Exposures (f = frequency)				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	f/300	6
1500-100,000	5.0	6
(B) Limits For General Population / Uncontrolled Exposure (f = frequency)				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	f/1500	30
1500-100,000	1.0	30

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the standard were taken.

1.7 TEST METHODOLOGY

All measurements contained in this report were conducted in accordance with KDB 680106 D01 v02 guidance document.

The H-Field and E-Field field strength were measured at a separation distance of 10cm from the probe to the EUT. The measurements were made on all sides which come into close contact to the user. See section 2.2.9 for photos identifying the sides. During testing, the probe was slowly maneuvered on each side maintaining the 10cm distance to capture the peak emissions.

For H-Field measurements, a Narda EHP-200AC magnetic probe was used. The frequency response was set to 9kHz – 30 MHz. Scans were performed and the peak measurement was recorded in A/m for each side of the EUT.

For E-Field measurements, a Narda EHP-200AC E-Field probe was used. The frequency response was set to 9kHz – 30 MHz. Scans were performed and the peak measurement was recorded in V/m for each side of the EUT.

See section 1.4 for mode and configuration of the EUT during testing.

1.8 TEST FACILITY

1.8.1 FCC – Site Registration

The TUV SUD America Inc. (Durham), test facility has been registered with the Federal Communication Commission as an ISO/IEC 17025 accredited test laboratory and assigned the designation number US1921.

1.8.2 Canadian ISED Site Registration

The TUV SUD America Inc. (Durham), test facility has been registered with Innovation, Science and Economic Development Canada and assigned the site number 20446.

SECTION 2

FIELD STRENGTH TEST DETAILS

2.1 FIELD STRENGTH LEVEL

2.1.1 Specification Reference

KDB 680106 D01 v02

2.1.2 Test Methodology

Per KDB 680106 D01 v02

2.1.3 Test Limits

Limits described in Section 1.5.1 of this test report.

2.1.4 Equipment Under Test and Modification State

Serial No: Sample #22 / Default Test Configuration

2.1.5 Date of Test/Test Engineer's Initials

November 14, 2017/JT

2.1.6 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.7 Environmental Conditions

Ambient Temperature 22 °C
Relative Humidity 36 %

2.1.8 Test Results


Table 2.1.8-1 – E-Field Measurement Results

Distance	Side A (V/m)	Side B (V/m)	Side C (V/m)	Side D (V/m)	Side E (V/m)	Side F (V/m)	Limit (V/m)	Results
10cm	7.18	6.49	6.23	6.81	8.58	5.35	614.00	Pass


Table 2.1.8-2 – H-Field Measurement Results

Distance	Side A (A/m)	Side B (A/m)	Side C (A/m)	Side D (A/m)	Side E (A/m)	Side F (A/m)	Limit (A/m)	Results
10cm	0.66	0.22	0.40	0.21	0.23	0.60	1.63	Pass


2.1.8.1 Plots

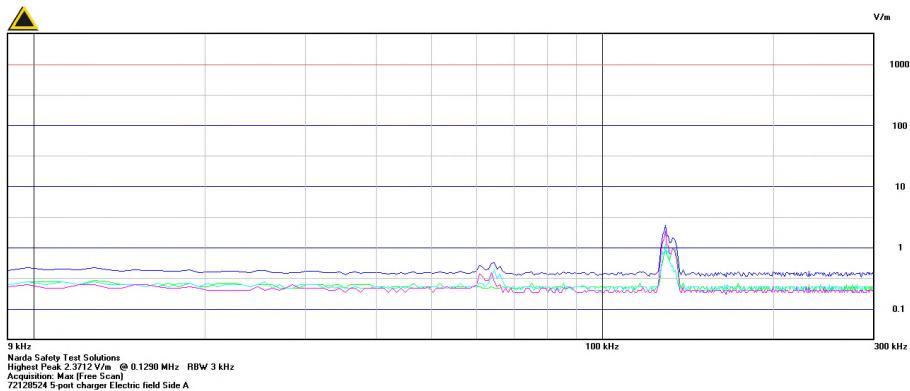




Graph 2.1.8.1-1 – E-Field Side A Plot 9kHz to 300kHz

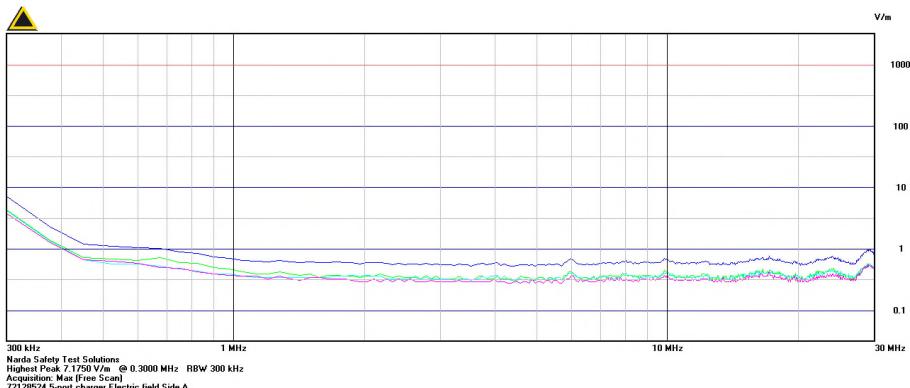


Graph 2.1.8.1-2 – E-Field Side A Plot 300kHz to 30MHz

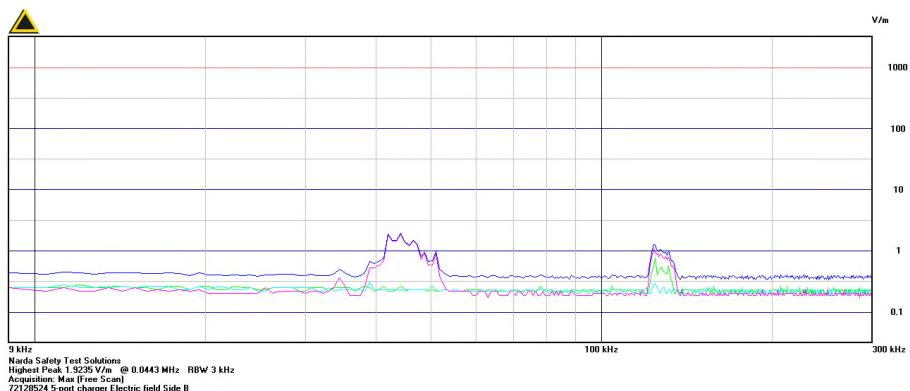


Graph 2.1.8.1-3 – E-Field Side B Plot 9kHz to 300kHz

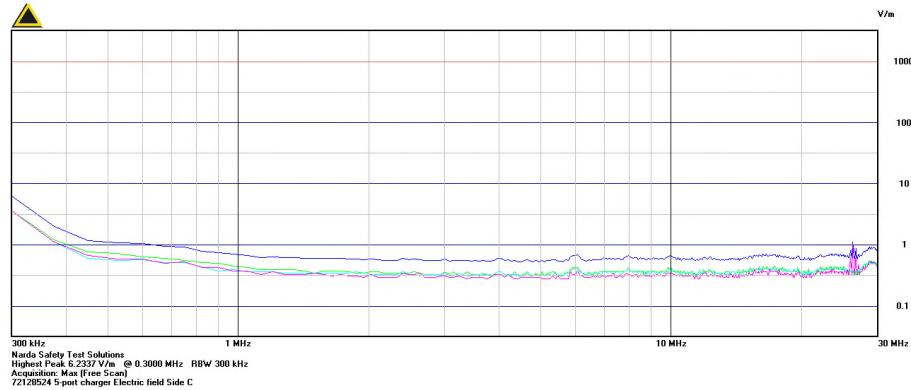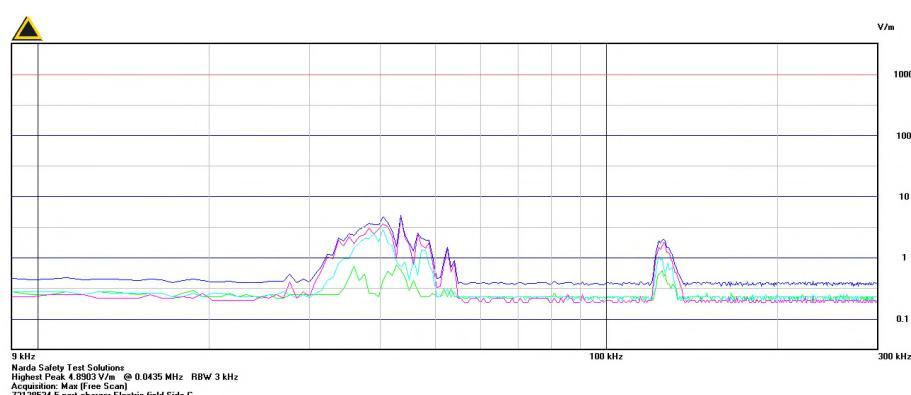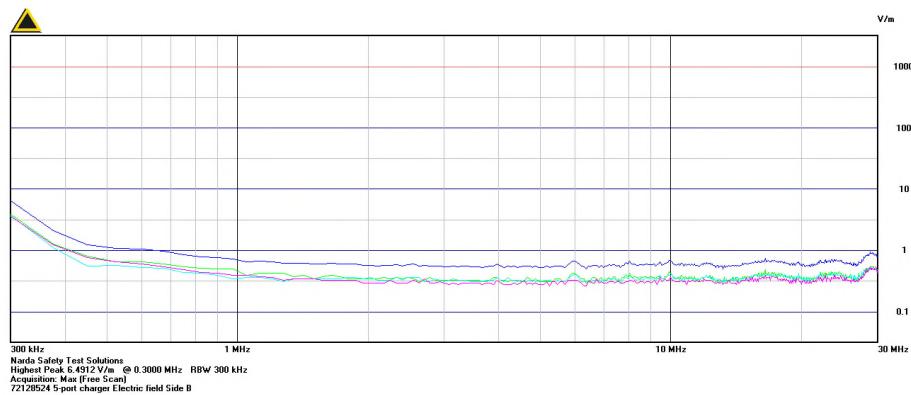


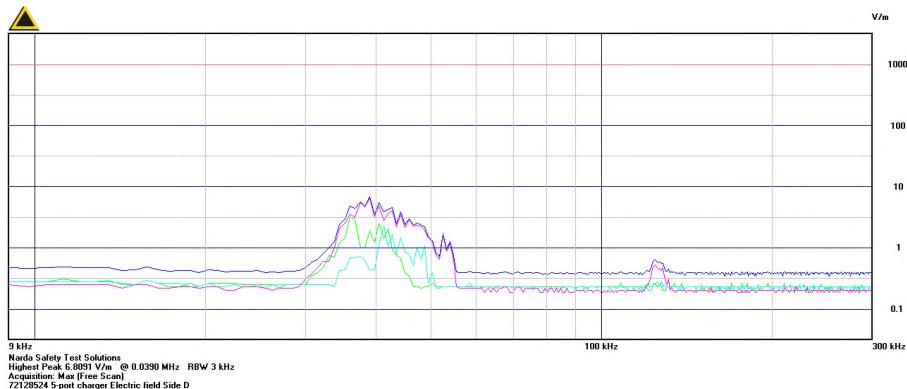




Graph 2.1.8.1-7 – E-Field Side D Plot 9kHz to 300kHz

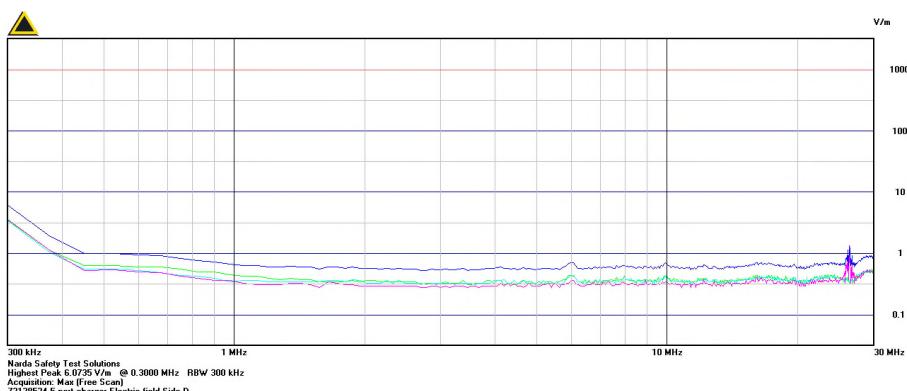


Graph 2.1.8.1-8 – E-Field Side D 300kHz to 30MHz

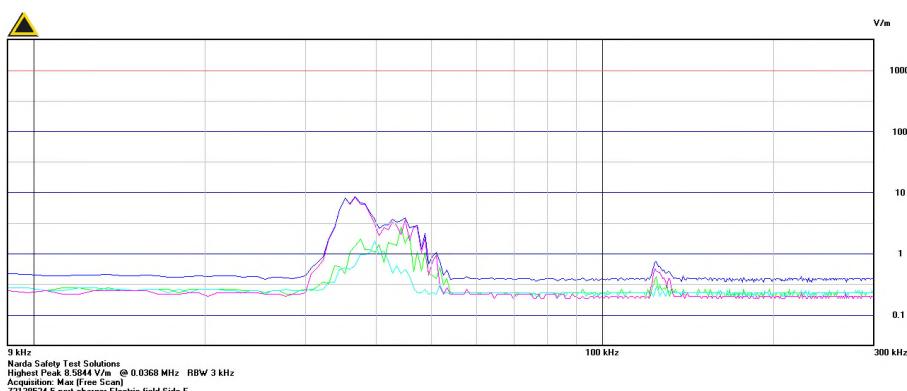


Graph 2.1.8.1-9 – E-Field Side E Plot 9kHz to 300kHz

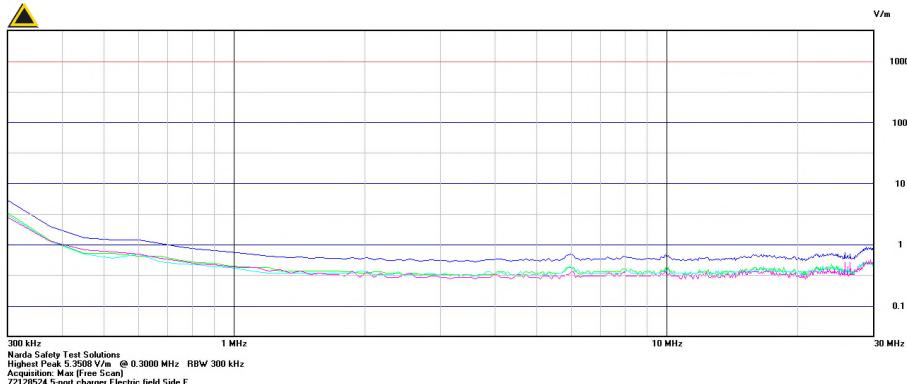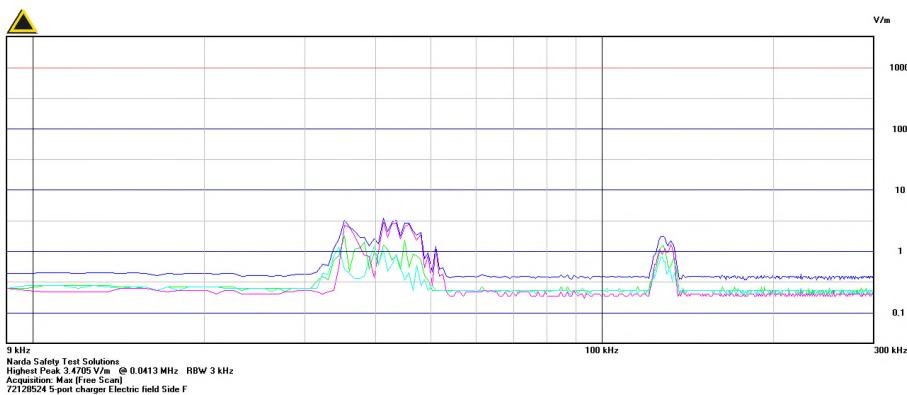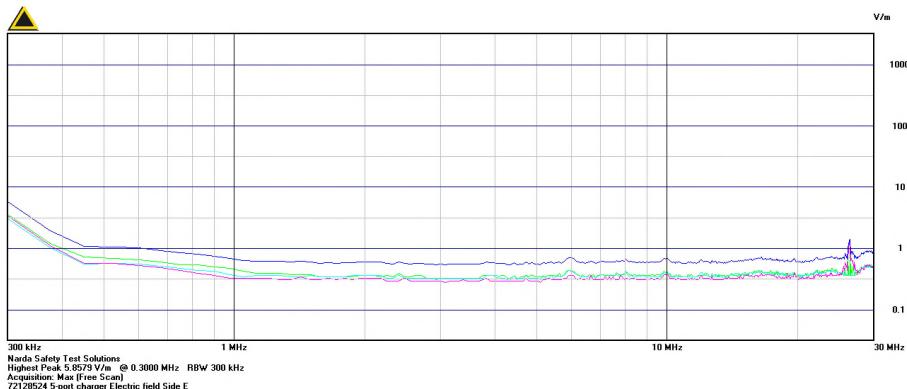


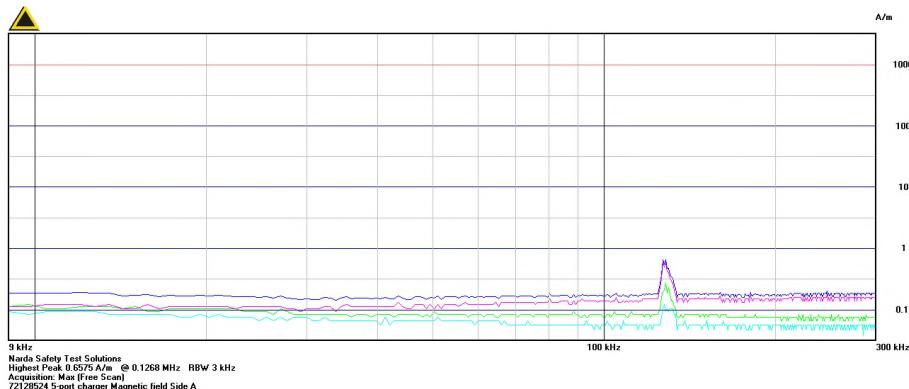


Graph 2.1.8.1-13 – H-Field Side A Plot 9kHz to 300kHz

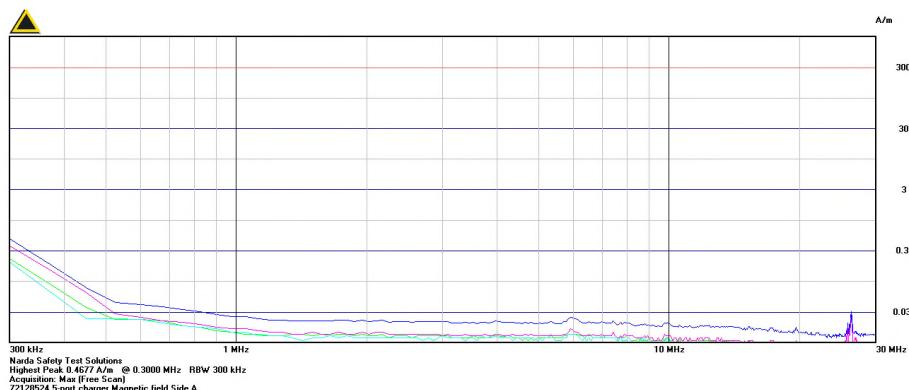


Graph 2.1.8.1-14 – H-Field Side A 300kHz to 30MHz

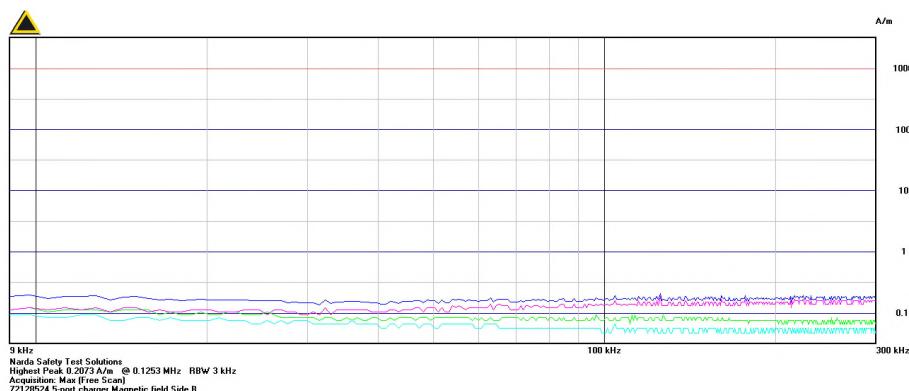


Graph 2.1.8.1-15 – H-Field Side B Plot 9kHz to 300kHz

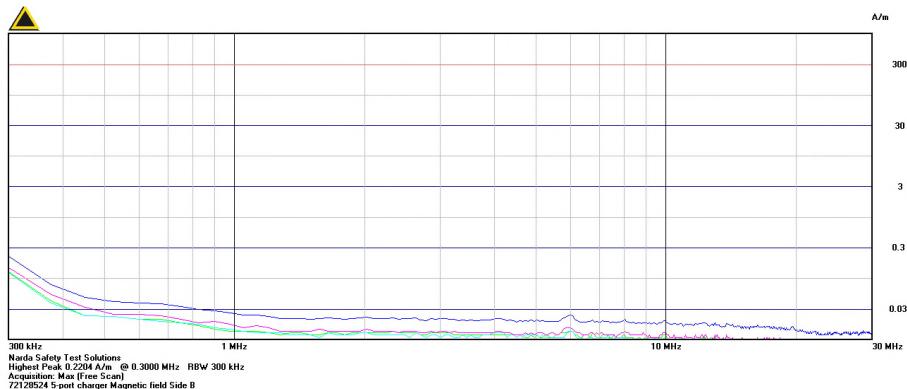


Graph 2.1.8.1-16 – H-Field Side B 300kHz to 30MHz

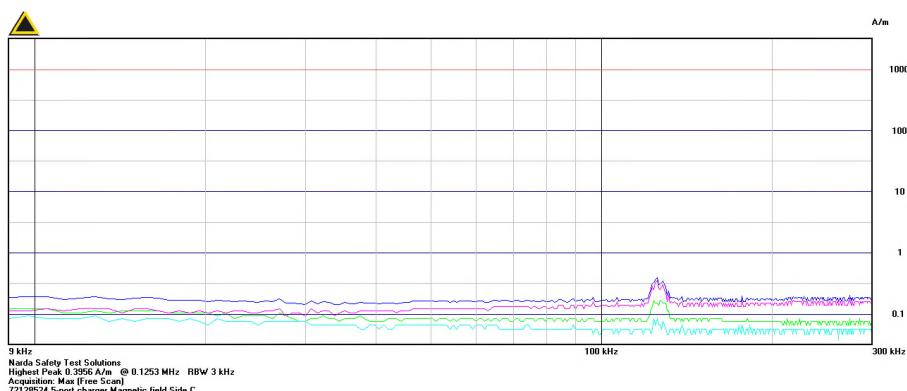


Graph 2.1.8.1-17 – H-Field Side C Plot 9kHz to 300kHz

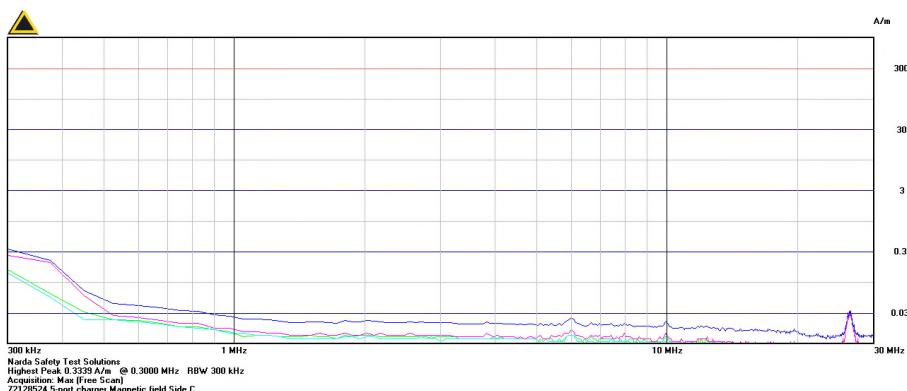


Graph 2.1.8.1-18 – H-Field Side C 300kHz to 30MHz

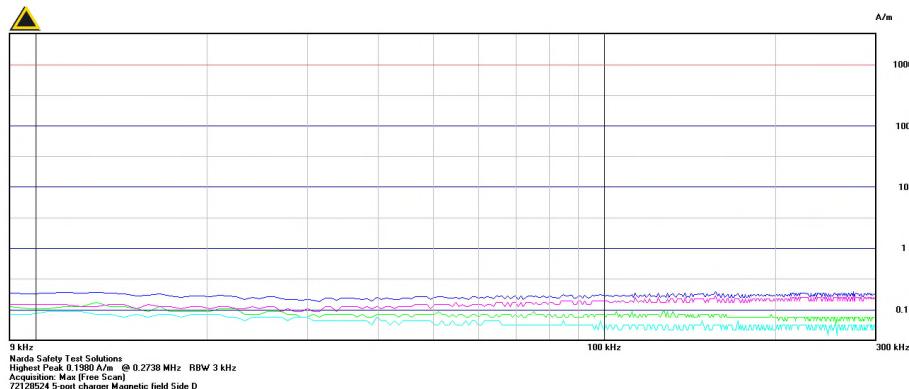


Graph 2.1.8.1-19 – H-Field Side D Plot 9kHz to 300kHz

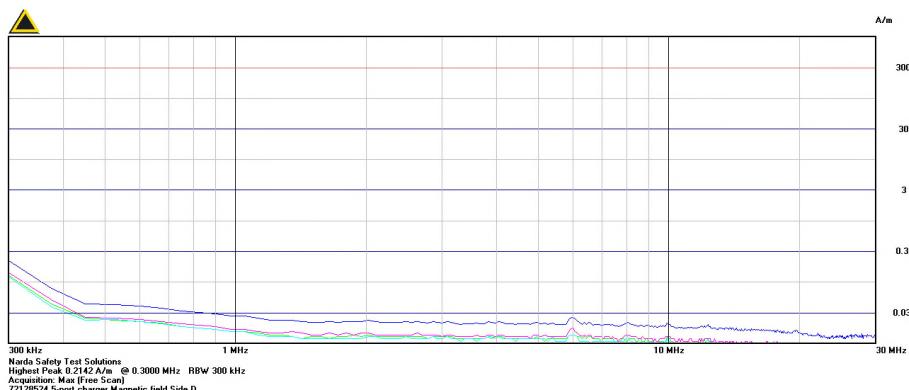


Graph 2.1.8.1-20 – H-Field Side D 300kHz to 30MHz

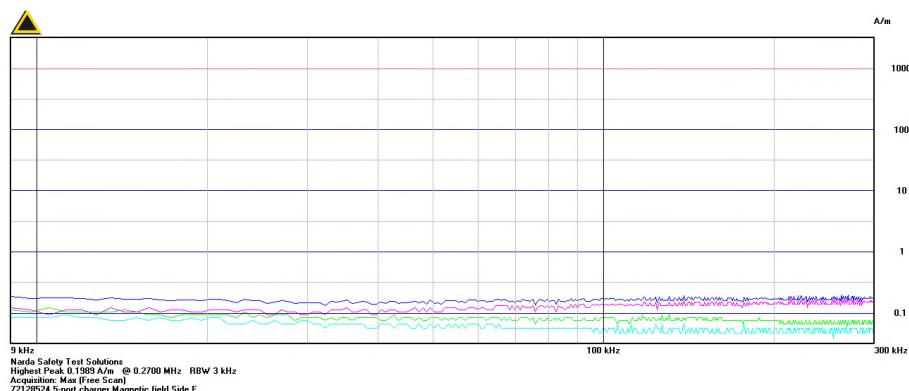


Graph 2.1.8.1-21 – H-Field Side E Plot 9kHz to 300kHz

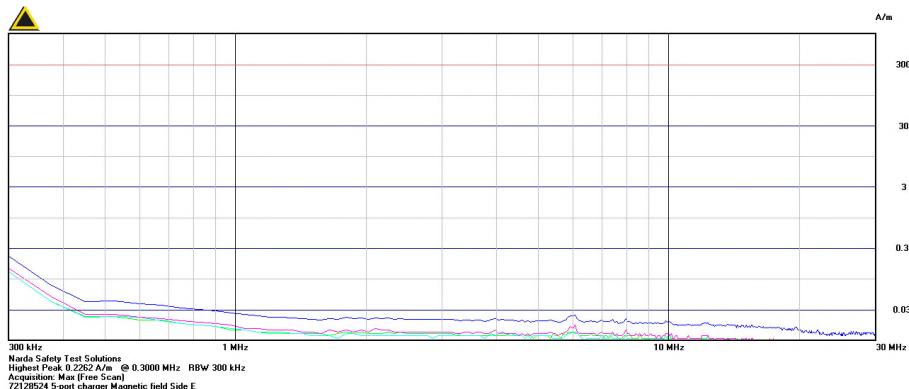

Graph 2.1.8.1-22 – H-Field SideE 300kHz to 30MHz

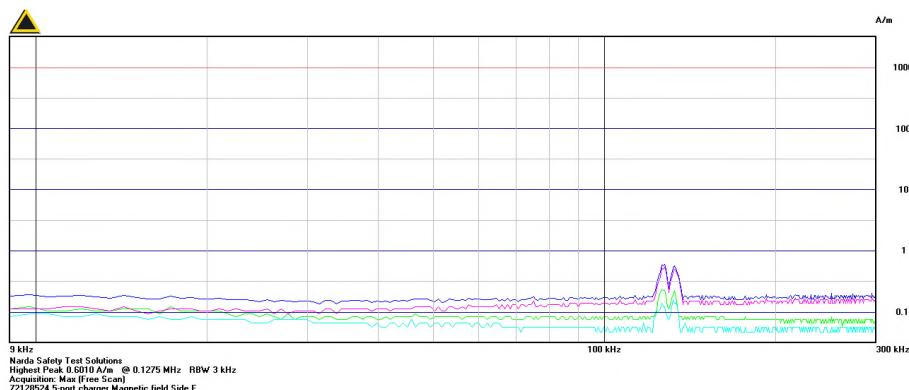

Graph 2.1.8.1-23 – H-Field Side F Plot 9kHz to 300kHz

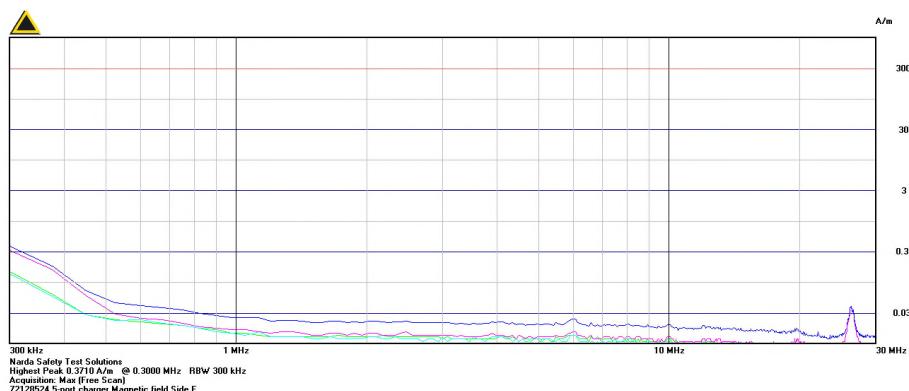

Graph 2.1.8.1-24 – H-Field Side F 300kHz to 30MHz

2.1.9 Test Setup Photo



Photo 2.1.9-1 –View of the Test Set-up

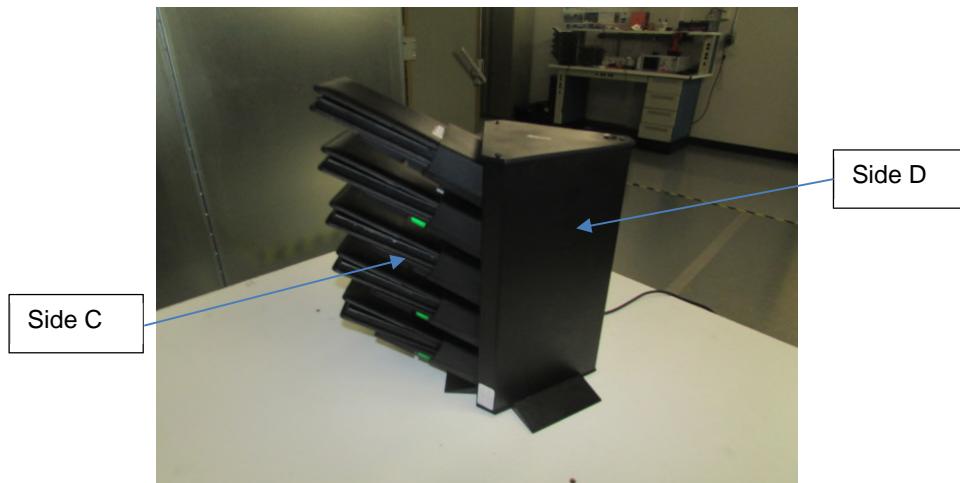


Photo 2.1.9-3 – Side Identification

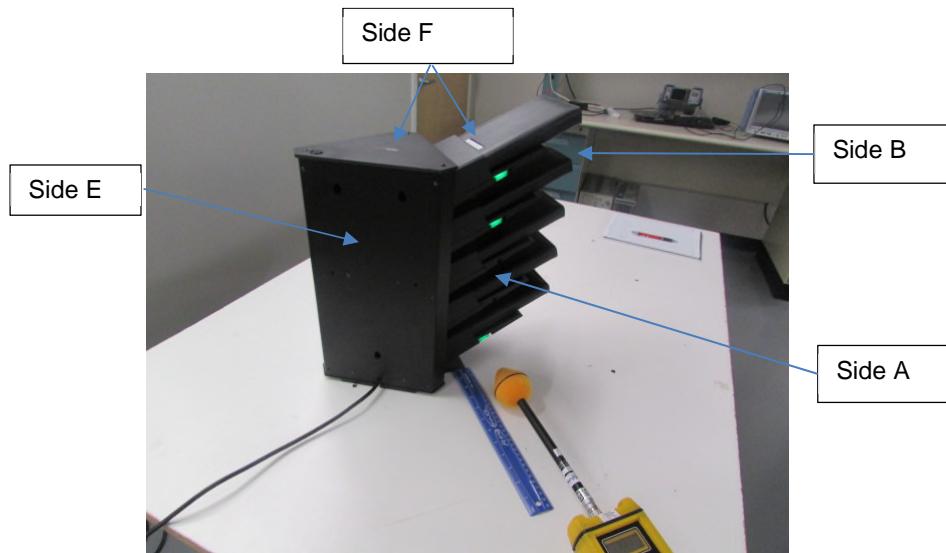


Photo 2.1.9-4 – Side Identification

SECTION 3

TEST EQUIPMENT USED

3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

ID Number	Test Equipment	Type	Serial Number	Manufacturer	Cal Due Date
AEMC818	Electric and Magnetic Field Probe	EHP-200AC	170WX71004	Narda	10/18/2018

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:

3.2.1 MU for Magnetic Field Strength Measurement

1.1 dB

3.2.2 MU for Electric Field Strength Measurement

0.97 dB

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by ANAB, NIST, or any agency of the federal government.