

**CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 Issue 4**

**TEST REPORT**

*For*

**Wireless Module**

**MODEL NUMBER: LA02306**

**REPORT NUMBER: 4791885357.1-1-RF-1**

**ISSUE DATE: August 28, 2025**

**FCC ID: 2AB2Q-LA02306**

**IC: 10256A-LA02306**

*Prepared for*

**LEEDARSON LIGHTING CO., LTD.  
Xingtai Industrial Park, Economic Development Zone of Changtai County.  
ZHANGZHOU CITY Fujian 363900**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch  
Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,  
Guangdong, China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

## Revision History

Rev.	Issue Date	Revisions	Revised By
V0	August 28, 2025	Initial Issue	

### Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c) RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2020, Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
Conducted Output Power	ANSI C63.10-2020, Clause 11.9.1.2	FCC Part 15.247 (b)(3) RSS-247 Clause 6.3.2	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2020, Clause 11.8.1	FCC Part 15.247 (a)(2) RSS-247 Clause 6.3.1 (a) ISED RSS-Gen Clause 6.7	Pass
Power Spectral Density	ANSI C63.10-2020, Clause 11.10.2	FCC Part 15.247 (e) RSS-247 Clause 6.3.1 (b)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2020, Clause 11.11	FCC Part 15.247(d) RSS-247 Clause 6.6	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2020, Clause 11.12	FCC Part 15.247 (d) FCC Part 15.205/15.209 RSS-247 Clause 6.6 RSS-GEN Clause 8.9	Pass
Duty Cycle	ANSI C63.10-2020, Clause 11.6	None; for reporting purposes only.	Pass

Note: For ISED, this report is also performed according to ANSI C63.10-2020 + Cor.1-2023 standards.

\*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

\*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C, ISED RSS-247 Issue 4> when <Simple Acceptance> decision rule is applied.

## CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>6</b>
<b>2. TEST METHODOLOGY.....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>9</i>
5.2. <i>CHANNEL LIST .....</i>	<i>9</i>
5.3. <i>MAXIMUM POWER .....</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>10</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>11</i>
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST.....</i>	<i>12</i>
<b>6. MEASURING EQUIPMENT AND SOFTWARE USED.....</b>	<b>13</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>16</b>
7.1. <i>CONDUCTED OUTPUT POWER .....</i>	<i>16</i>
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....</i>	<i>17</i>
7.3. <i>POWER SPECTRAL DENSITY .....</i>	<i>19</i>
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION.....</i>	<i>21</i>
7.5. <i>DUTY CYCLE .....</i>	<i>23</i>
<b>8. RADIATED TEST RESULTS .....</b>	<b>24</b>
8.1. <i>RESTRICTED BANDEDGE .....</i>	<i>32</i>
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ) .....</i>	<i>44</i>
8.3. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ) .....</i>	<i>50</i>
8.4. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ) .....</i>	<i>74</i>
8.5. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ) .....</i>	<i>77</i>
8.6. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ).....</i>	<i>79</i>
<b>9. ANTENNA REQUIREMENT .....</b>	<b>81</b>
<b>10. AC POWER LINE CONDUCTED EMISSION .....</b>	<b>82</b>
<b>11. TEST DATA.....</b>	<b>86</b>

11.1.	<i>APPENDIX A: DTS BANDWIDTH</i> .....	86
11.1.1.	Test Result.....	86
11.1.2.	Test Graphs.....	87
11.2.	<i>APPENDIX B: OCCUPIED CHANNEL BANDWIDTH</i> .....	93
11.2.1.	Test Result.....	93
11.2.2.	Test Graphs.....	94
11.3.	<i>APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER</i> .....	100
11.3.1.	Test Result.....	100
11.4.	<i>APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY</i> .....	101
11.4.1.	Test Result.....	101
11.4.2.	Test Graphs.....	102
11.5.	<i>APPENDIX E: BAND EDGE MEASUREMENTS</i> .....	108
11.5.1.	Test Result.....	108
11.5.2.	Test Graphs.....	109
11.6.	<i>APPENDIX F: CONDUCTED SPURIOUS EMISSION</i> .....	113
11.6.1.	Test Result.....	113
11.6.2.	Test Graphs.....	114
11.7.	<i>APPENDIX G: DUTY CYCLE</i> .....	132
11.7.1.	Test Result.....	132
11.7.2.	Test Graphs.....	133

# 1. ATTESTATION OF TEST RESULTS

## Applicant Information

Company Name: LEEDARSON LIGHTING CO., LTD.  
Address: Xingtai Industrial Park, Economic Development Zone of Changtai County. ZHANGZHOU CITY Fujian 363900

## Manufacturer Information


Company Name: LEEDARSON LIGHTING CO., LTD.  
Address: Xingtai Industrial Park, Economic Development Zone of Changtai County. ZHANGZHOU CITY Fujian 363900

## EUT Information

EUT Name: Wireless Module  
Model: LA02306  
Sample Received Date: July 28, 2025  
Sample Status: Normal  
Sample ID: 8753142  
Date of Tested: July 28, 2025 to August 28, 2025

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 4	Pass

Prepared By:



Fanny Huang  
Project Engineer

Checked By:



Kebo Zhang  
Operations Leader

Approved By:



Stephen Guo  
Operations Manager

## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 4, KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, ANSI C63.10-2013, ANSI C63.10-2020+Cor.1-2023 and ISED RSS-GEN Issue 5.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202</p>
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	Wireless Module
Model	LA02306

Frequency Range:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK
Data Rates:	1Mbps/2Mbps/125kbps/500kbps
Normal Test Voltage:	DC 3.3 V

### 5.2. CHANNEL LIST

Channel	Frequency (MHz)						
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460	/	/
8	2418	19	2440	30	2462	/	/
9	2420	20	2442	31	2464	/	/
10	2422	21	2444	32	2466	/	/

### 5.3. MAXIMUM POWER

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)	Maximum EIRP (dBm)
LE 1M	2402 ~ 2480	0-39[40]	12.09	13.79
LE 2M	2402 ~ 2480	0-39[40]	12.12	13.82
LE 125k	2402 ~ 2480	0-39[40]	12.11	13.81
LE 500k	2402 ~ 2480	0-39[40]	12.10	13.80

#### 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
LE 1M	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz
LE 2M	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz
LE 125k	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz
LE 500k	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz

#### 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software Version		Atmosic RF Tool		
Modulation Type	Transmit Antenna Number	Test Software setting value		
		CH 0	CH 19	CH 39
GFSK(1Mbps)	1	11	11	11
GFSK(2Mbps)	1	11	11	11
GFSK(125kbps)	1	11	11	11
GFSK(500kbps)	1	11	11	11

### 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	PCB Antenna	1.7

Test Mode	Transmit and Receive Mode	Description
LE 1M	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
LE 2M	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
LE 125k	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
LE 500k	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

## 5.7. SUPPORT UNITS FOR SYSTEM TEST

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	PC	Lenovo	E42-80	/
2	AC Adaptor	Lenovo	ADLX65YCC3D	Input: AC 100-240V, 1.8A, 50-60Hz Output: DC 20V, 3.25A,65.0W Max

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

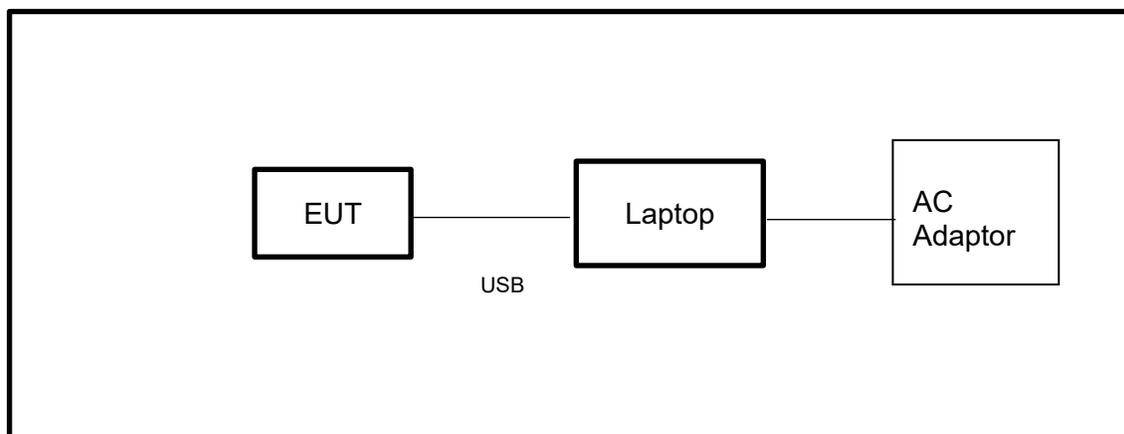

Note: AC Adaptor only use for AC POWER LINE CONDUCTED EMISSION test.

## 6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Dec.27,2024	Dec.26,2025
Vector Signal Generator	R&S	SMBV100A	261637	Sep.28, 2024	Sep.27, 2025
Signal Generator	R&S	SMB100A	178553	Sep.28, 2024	Sep.27, 2025
Signal Analyzer	R&S	FSV40	101118	Sep.28, 2024	Sep.27, 2025
Software					
Description	Manufacturer	Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.13, 2024	Sep.12, 2025
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.28, 2024	Sep.27, 2025
DC power supply	Keysight	E3642A	MY55159130	Sep.28, 2024	Sep.27, 2025
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.28, 2024	Sep.27, 2025
Attenuator	Aglient	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025
RF Control Unit	Tonscend	JS0806-2	23B80620666	Dec.27,2024	Dec.26,2025
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Sep.28, 2024	Sep.27, 2025
Two-Line V-Network	R&S	ENV216	101983	Sep.28, 2024	Sep.27, 2025
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Sep.28, 2024	Sep.27, 2025
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.28, 2024	Sep.27, 2025
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.28, 2024	Sep.27, 2025
EMI Measurement Receiver	R&S	ESR26	101377	Sep.28, 2024	Sep.27, 2025
Horn Antenna	TDK	HRN-0118	130940	Dec.10, 2024	Dec.11, 2027
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.28, 2024	Sep.27, 2025
Horn Antenna	Schwarzbeck	BBHA9170	697	Jun 30, 2024	Jun 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.28, 2024	Sep.27, 2025
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.28, 2024	Sep.27, 2025
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Sep.28, 2024	Sep.27, 2025
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Sep.28, 2024	Sep.27, 2025
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.8, 2024	Oct.7, 2025
Barometer	Yiyi	Baro	N/A	Oct.10, 2024	Oct.9, 2025
Attenuator	Agilent	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025

## 7. ANTENNA PORT TEST RESULTS

### 7.1. CONDUCTED OUTPUT POWER

#### LIMITS


CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 6.3.2	Peak Conduct Output Power	1 watt or 30 dBm	2400-2483.5

#### TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

#### TEST SETUP

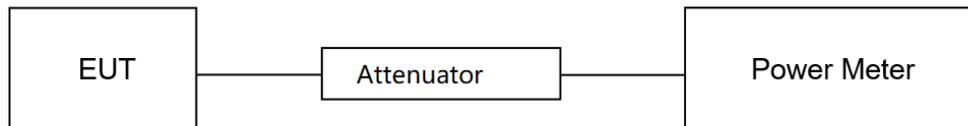

#### TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	64.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

#### TEST DATE / ENGINEER

Test Date	August 22, 2025	Test By	Bairong Liu
-----------	-----------------	---------	-------------

#### TEST RESULTS

Please refer to section "Test Data" - Appendix C

## 7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 6.3.1(a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

### TEST PROCEDURE


Refer to ANSI C63.10-2020 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 1 % to 5 % of the OBW but not less than 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: ≥3 × RBW For 99 % Occupied Bandwidth: ≥3 × RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

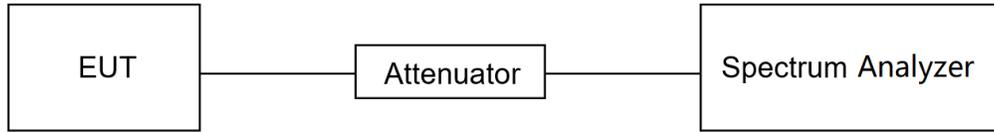**TEST SETUP****TEST ENVIRONMENT**

Temperature	24.2°C	Relative Humidity	64.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

**TEST DATE / ENGINEER**

Test Date	August 22, 2025	Test By	Bairong Liu
-----------	-----------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix A&B

### 7.3. POWER SPECTRAL DENSITY

#### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 6.3.1 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

#### TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.10.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$> 1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### TEST SETUP

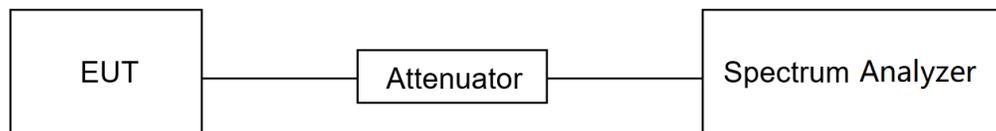

**TEST ENVIRONMENT**

Temperature	24.2°C	Relative Humidity	64.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

**TEST DATE / ENGINEER**

Test Date	August 22, 2025	Test By	Bairong Liu
-----------	-----------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix D

## 7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 6.6	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.11.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	$\geq 1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	No faster than coupled (auto) time

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	No faster than coupled (auto) time

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

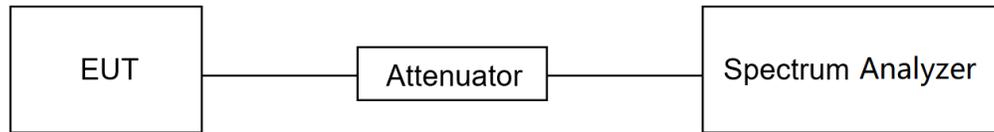**TEST SETUP****TEST ENVIRONMENT**

Temperature	24.2°C	Relative Humidity	64.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

**TEST DATE / ENGINEER**

Test Date	August 22, 2025	Test By	Bairong Liu
-----------	-----------------	---------	-------------

**TEST RESULTS**

Please refer to section "Test Data" - Appendix E&F

## 7.5. DUTY CYCLE


### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.6 Zero – Span Spectrum Analyzer method.

### TEST SETUP

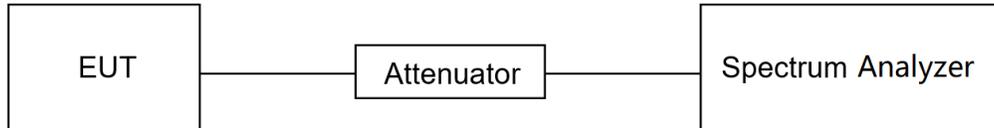

### TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	64.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

### TEST DATE / ENGINEER

Test Date	August 22, 2025	Test By	Bairong Liu
-----------	-----------------	---------	-------------

### TEST RESULTS

Please refer to section "Test Data" - Appendix G

## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands <sup>Note 1</sup>		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.6
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.877 - 5.883	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

**Note 1:** Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.  
<sup>2</sup>Above 38.6c

**TEST PROCEDURE**

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to  $Y-51.5 = Z$  dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

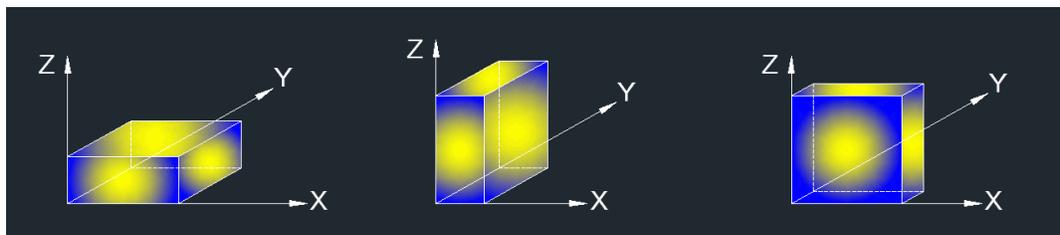

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


### TEST SETUP

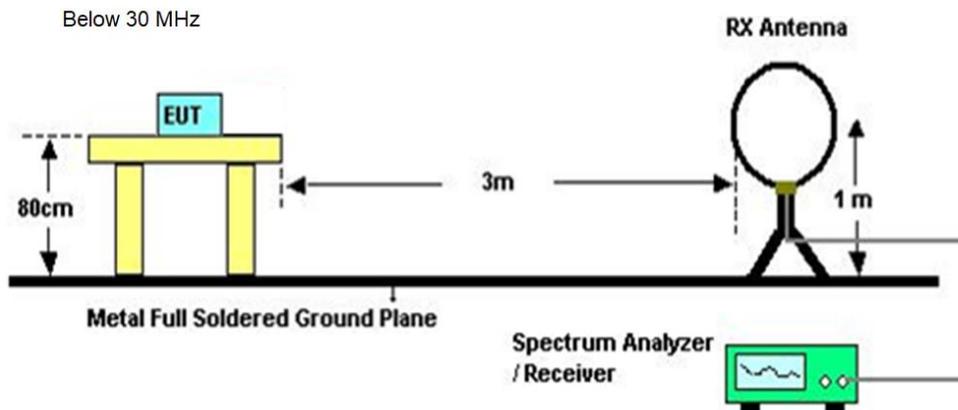

Below 1 GHz and above 30 MHz

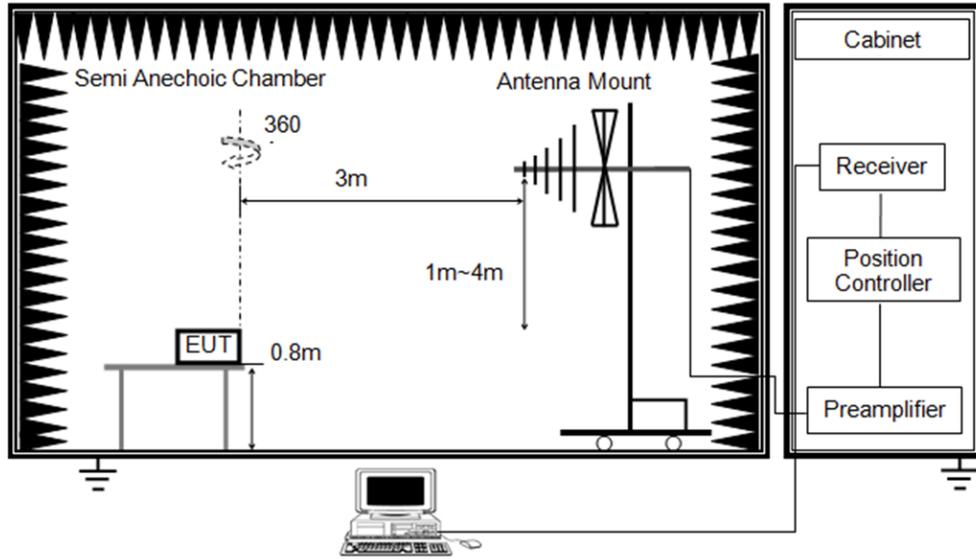

Above 1GHz

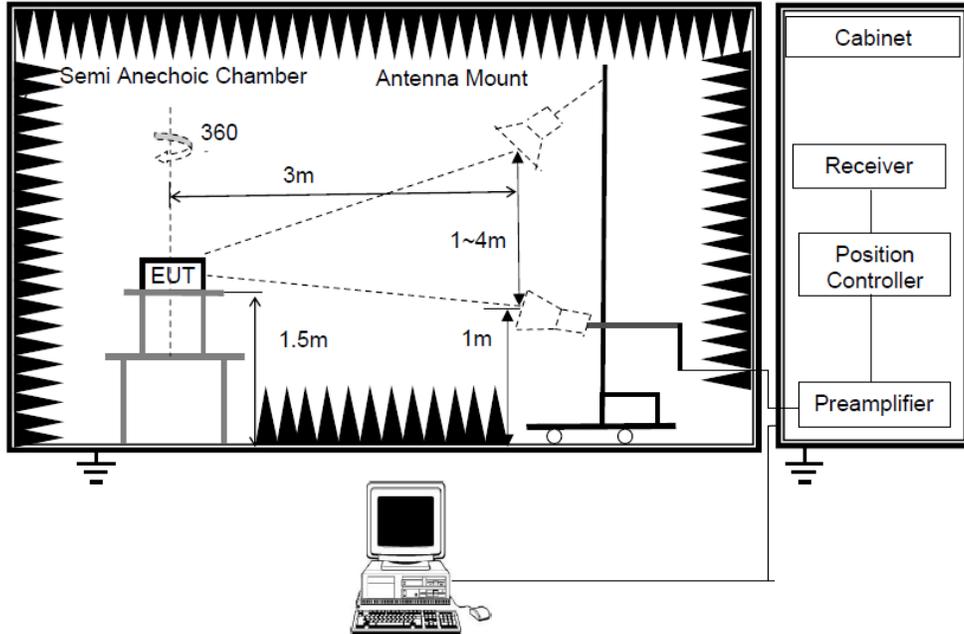

**TEST ENVIRONMENT**

Temperature	21.6°C	Relative Humidity	61.6%
Atmosphere Pressure	101kPa	Test Voltage	


**TEST DATE / ENGINEER**

Test Date	August 27, 2025	Test By	Stipe Zheng
-----------	-----------------	---------	-------------

**TEST RESULTS**


**8.1. RESTRICTED BANDEDGE**

Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.3V

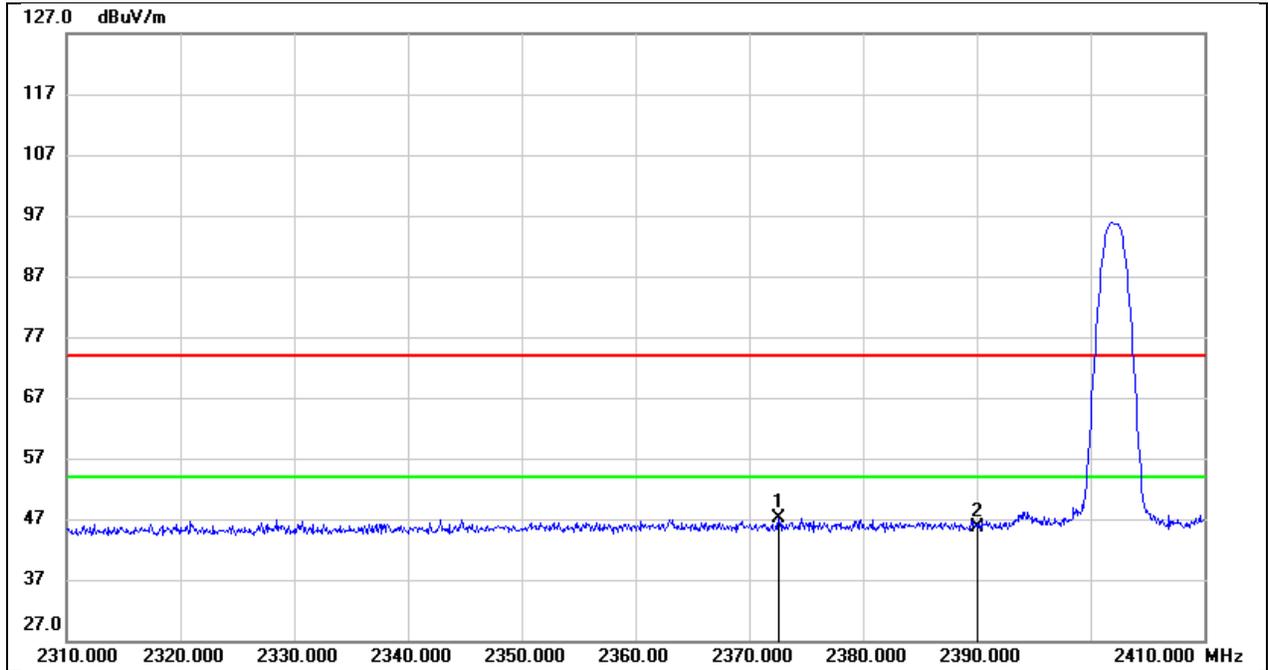


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2372.600	15.50	31.61	47.11	74.00	-26.89	peak
2	2390.000	13.90	31.69	45.59	74.00	-28.41	peak

Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 3.3V

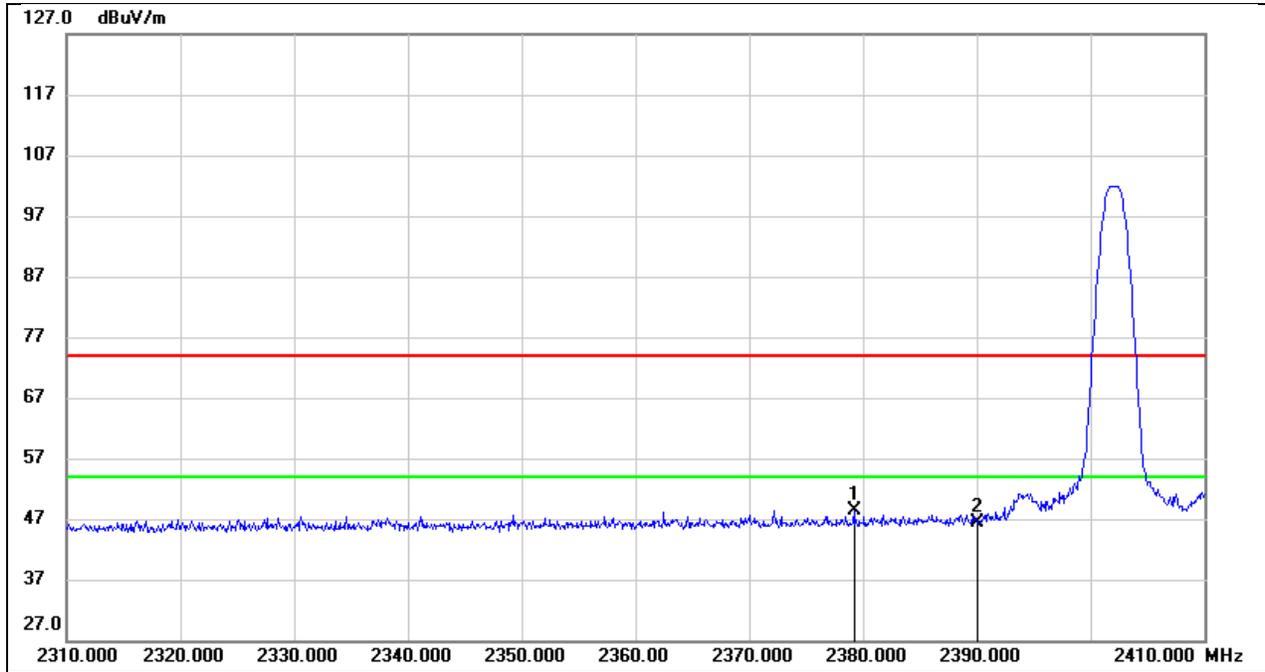


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.200	16.86	31.64	48.50	74.00	-25.50	peak
2	2390.000	14.64	31.69	46.33	74.00	-27.67	peak

Test Mode:	BLE 1M PK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	DC 3.3V

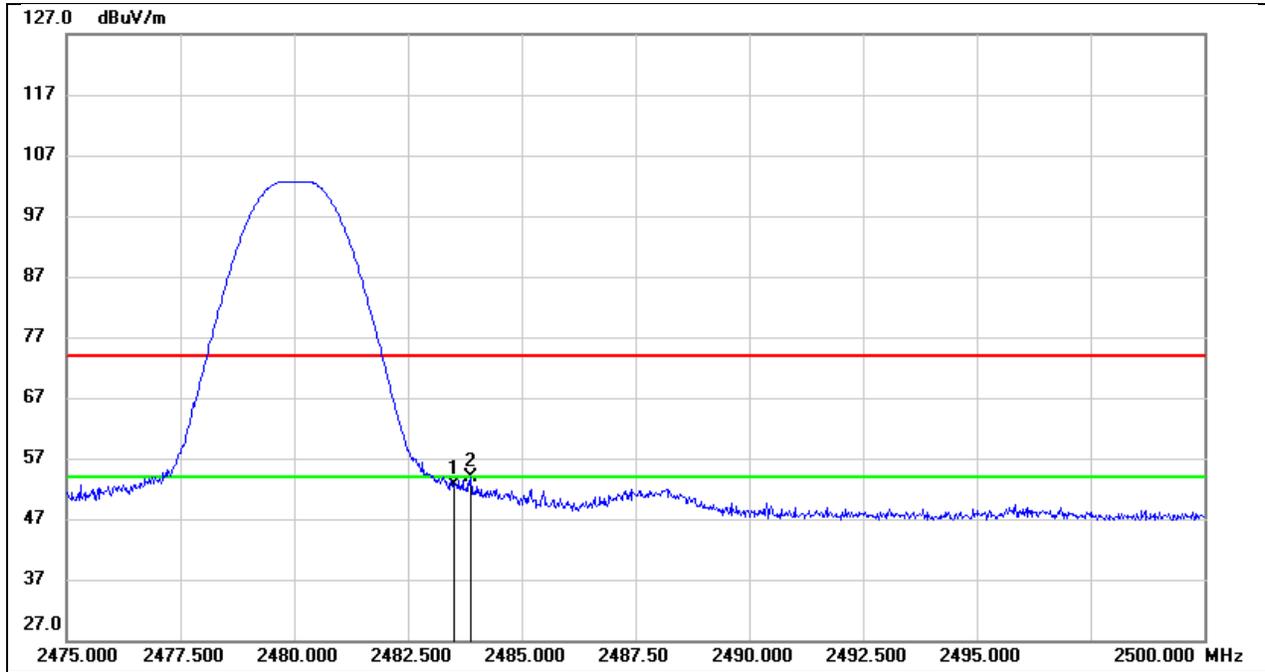


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.58	31.99	52.57	74.00	-21.43	peak
2	2483.875	21.82	31.99	53.81	74.00	-20.19	peak

Test Mode:	BLE 2M PK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 3.3V

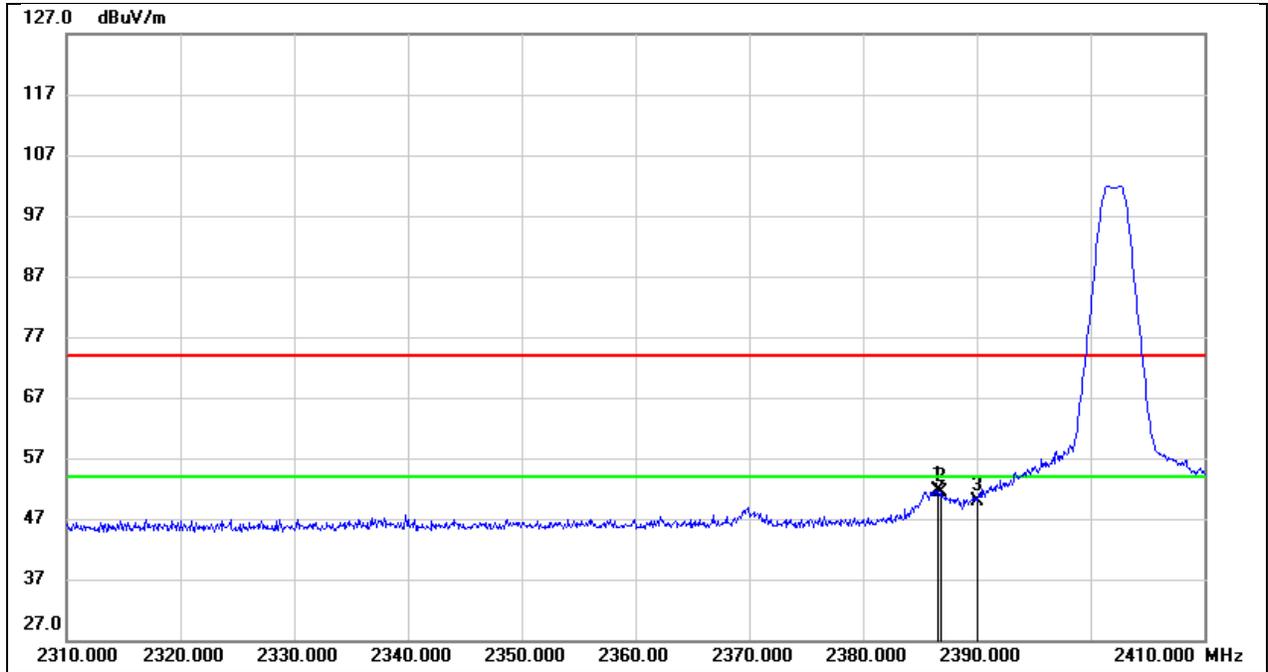


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.600	19.89	31.68	51.57	74.00	-22.43	peak
2	2386.900	19.58	31.68	51.26	74.00	-22.74	peak
3	2390.000	18.24	31.69	49.93	74.00	-24.07	peak

Test Mode:	BLE 2M PK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	DC 3.3V

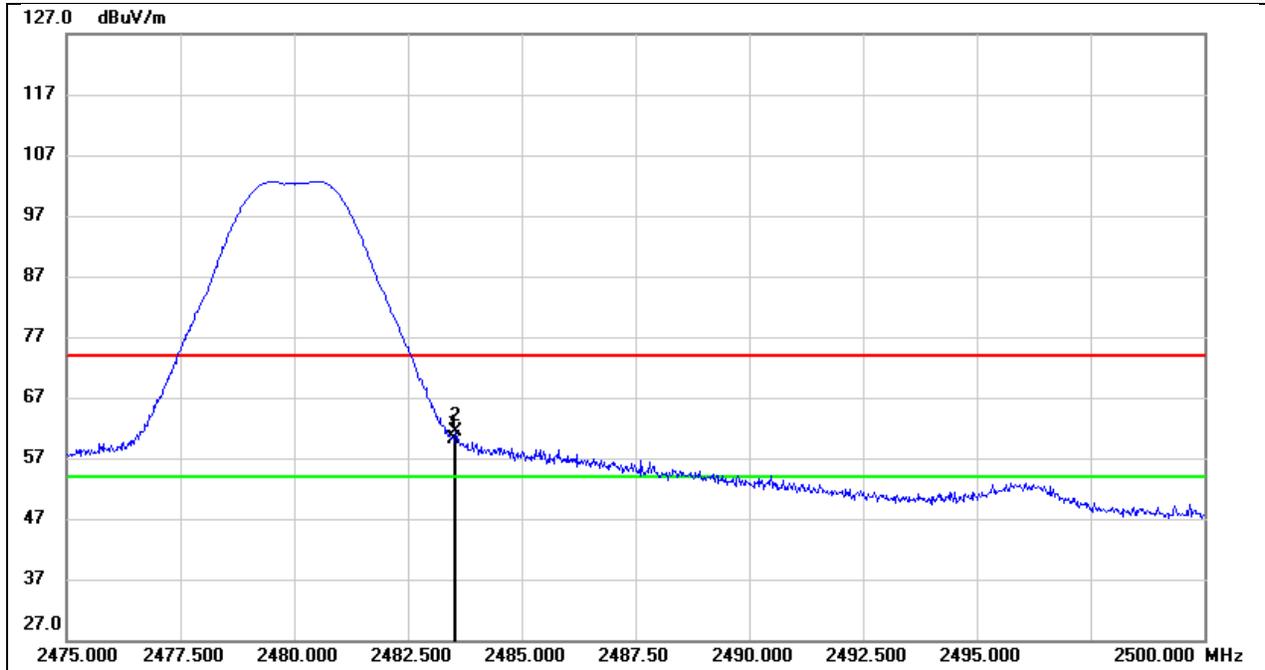


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	28.25	31.99	60.24	74.00	-13.76	peak
2	2483.550	29.46	31.99	61.45	74.00	-12.55	peak

Test Mode:	BLE 2M AV	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	DC 3.3V

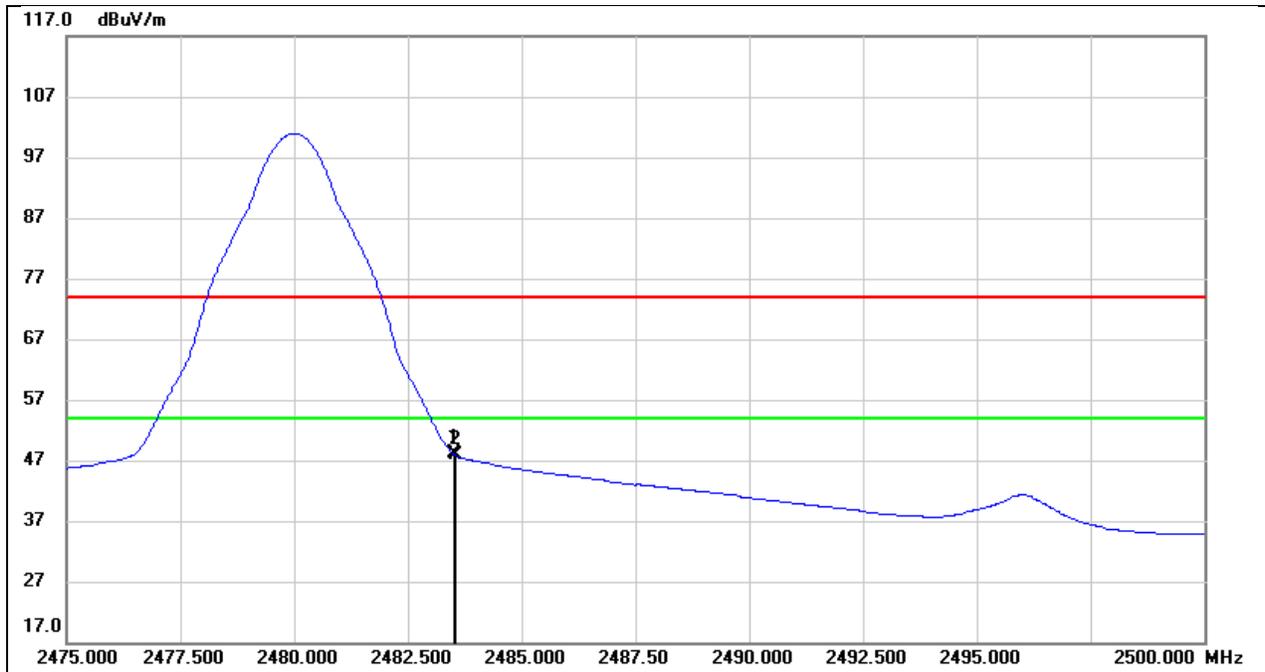


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.20	31.99	48.19	54.00	-5.81	AVG
2	2483.550	15.93	31.99	47.92	54.00	-6.08	AVG

Test Mode:	BLE 125k PK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 3.3V

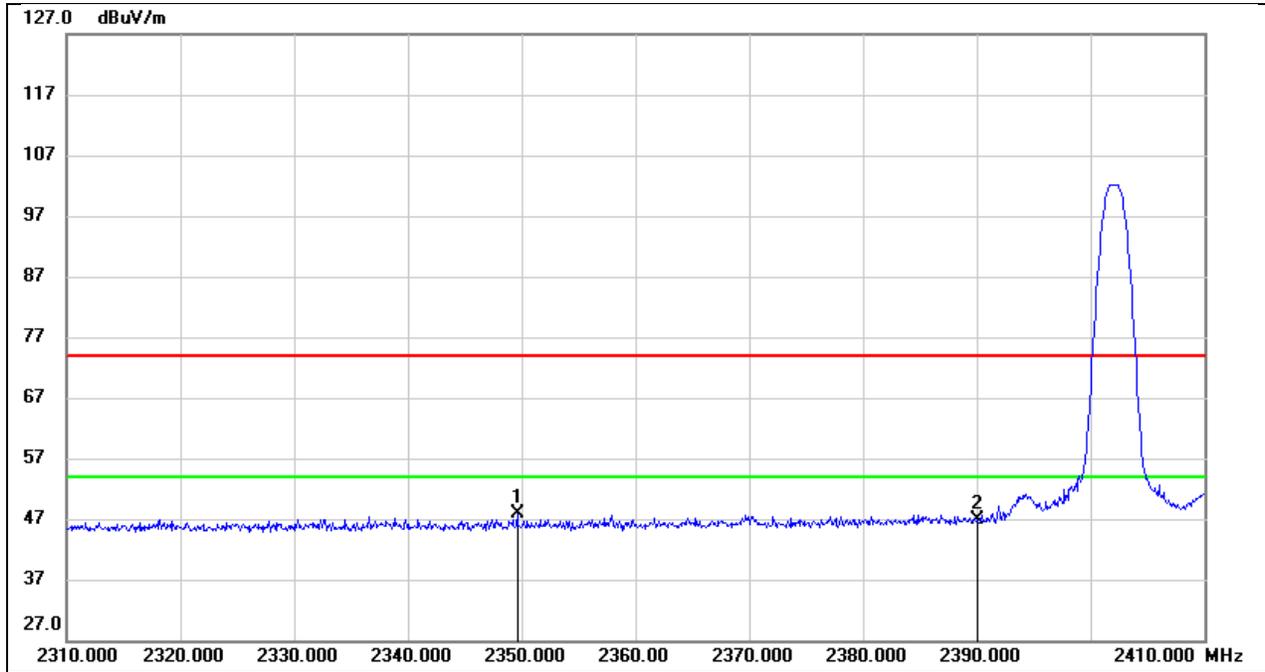


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2349.600	16.27	31.52	47.79	74.00	-26.21	peak
2	2390.000	15.19	31.69	46.88	74.00	-27.12	peak

Test Mode:	BLE 125k PK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	DC 3.3V

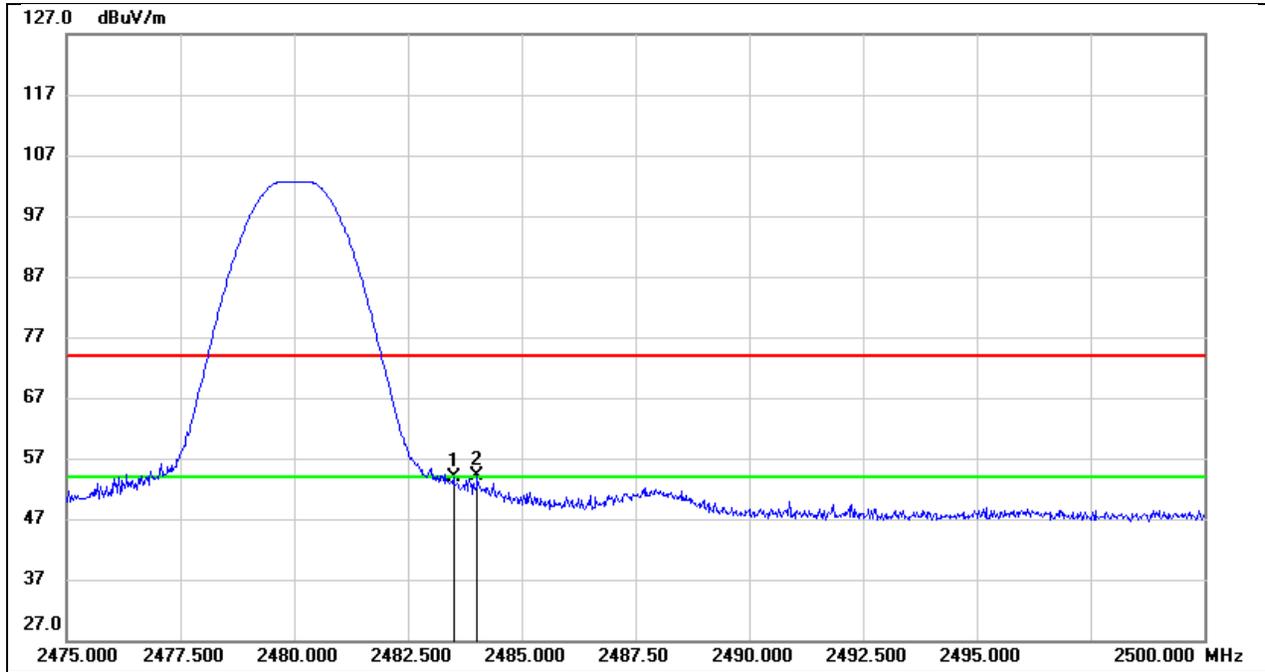


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	22.01	31.99	54.00	74.00	-20.00	peak
2	2484.025	22.18	31.99	54.17	74.00	-19.83	peak

Test Mode:	BLE 125k AV	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	DC 3.3V

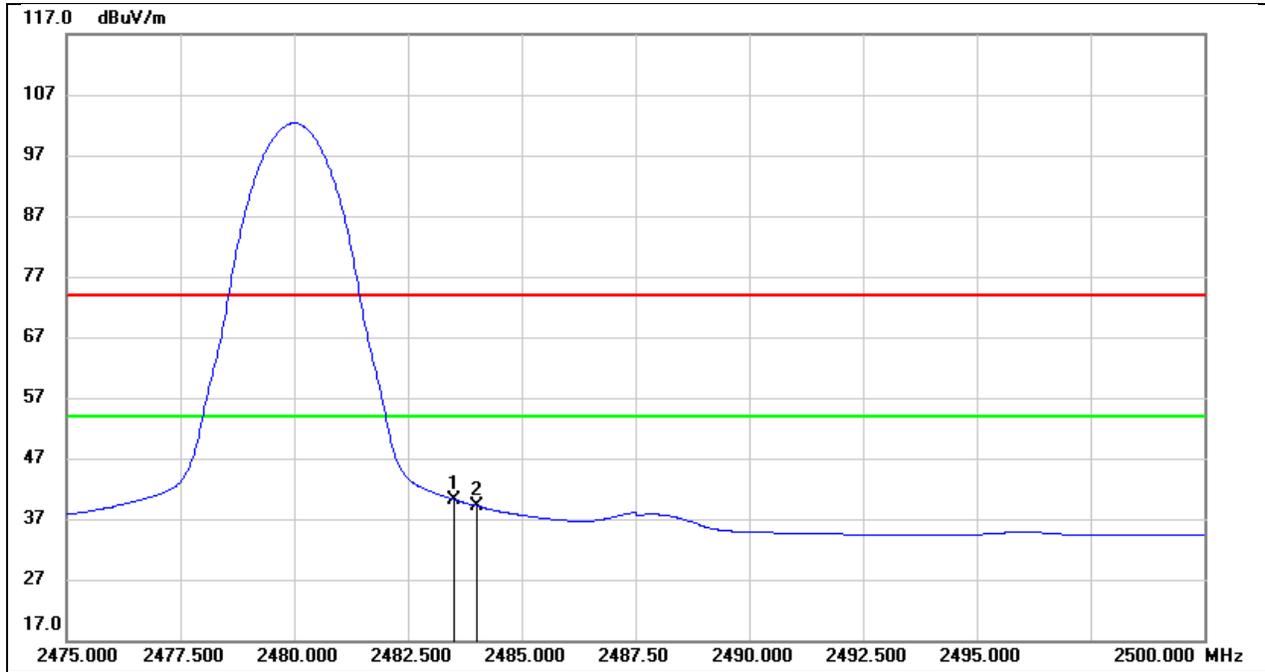


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	8.23	31.99	40.22	54.00	-13.78	AVG
2	2484.025	7.11	31.99	39.10	54.00	-14.90	AVG

Test Mode:	BLE 500k PK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 3.3V

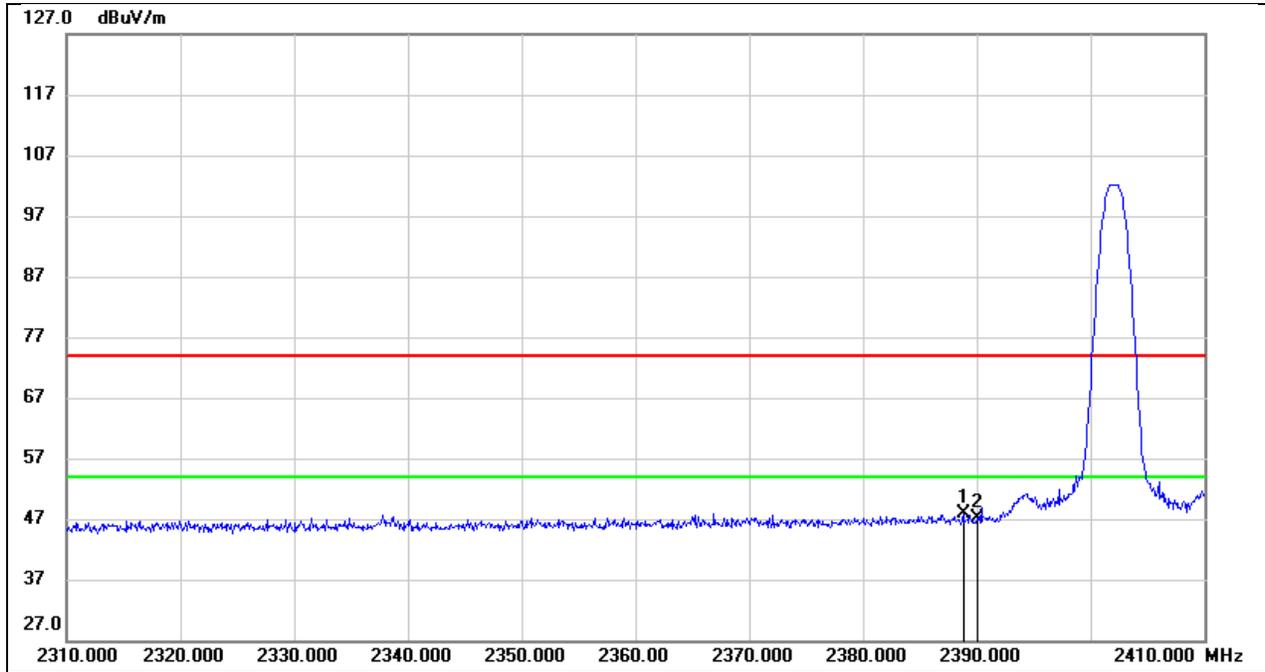


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.800	16.19	31.68	47.87	74.00	-26.13	peak
2	2390.000	15.34	31.69	47.03	74.00	-26.97	peak

Test Mode:	BLE 500k PK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	DC 3.3V

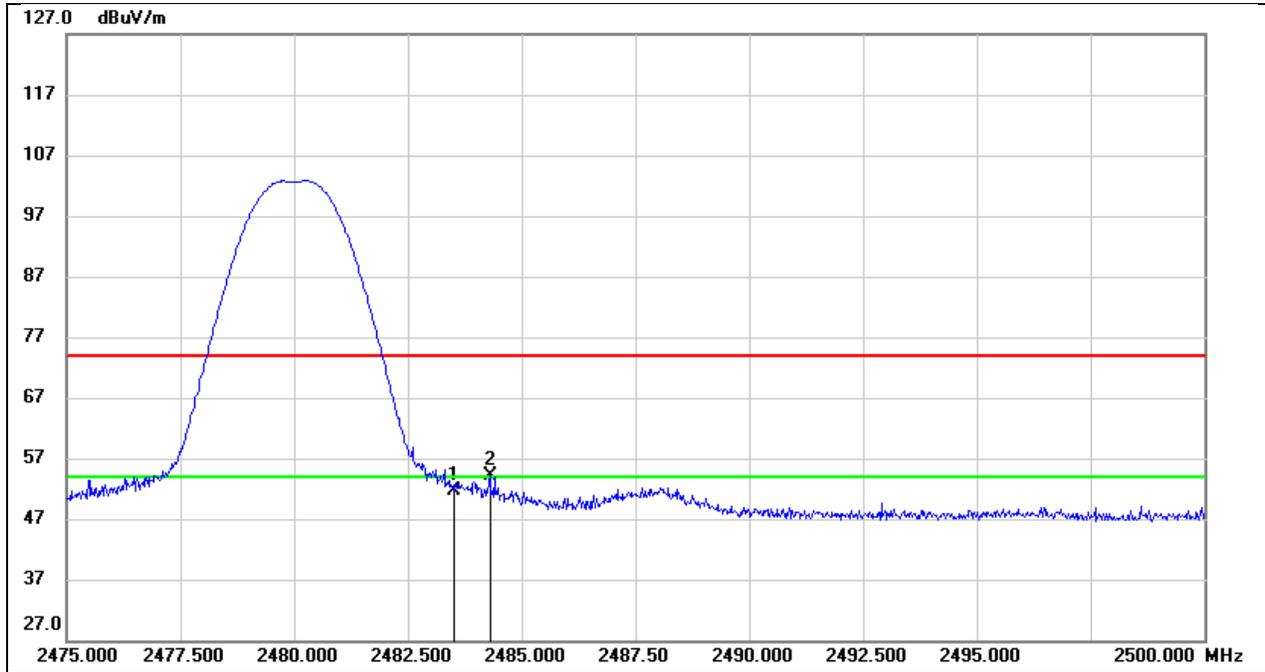

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.70	31.99	51.69	74.00	-22.31	peak
2	2484.300	22.12	31.99	54.11	74.00	-19.89	peak


Test Mode:	BLE 500k AV	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	DC 3.3V

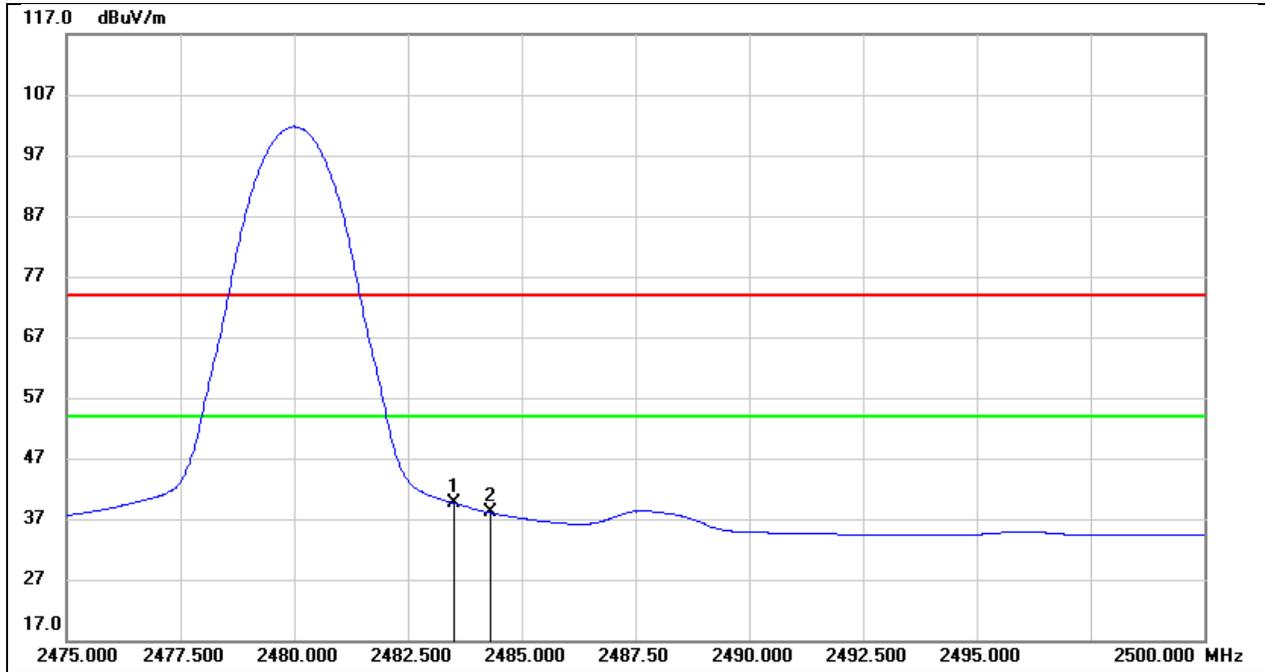

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	7.60	31.99	39.59	54.00	-14.41	AVG
2	2484.300	6.07	31.99	38.06	54.00	-15.94	AVG


### 8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.3V

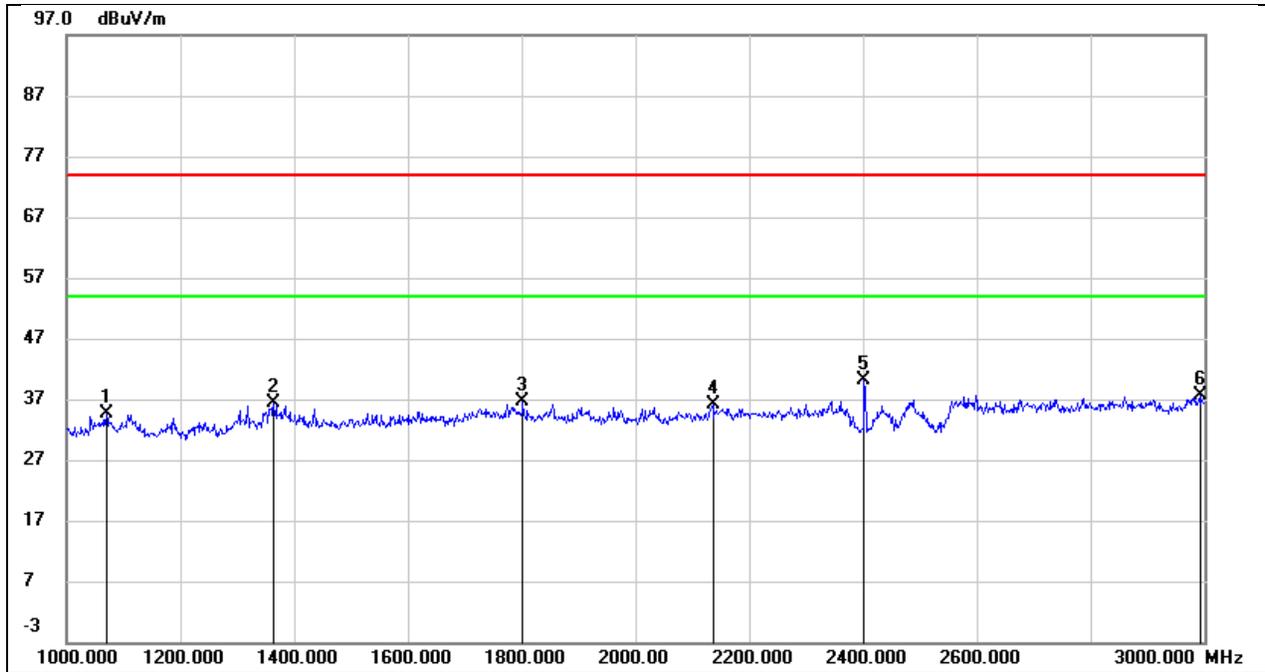


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1070.000	48.64	-14.01	34.63	74.00	-39.37	peak
2	1364.000	49.02	-12.62	36.40	74.00	-37.60	peak
3	1802.000	46.63	-10.09	36.54	74.00	-37.46	peak
4	2136.000	45.97	-9.73	36.24	74.00	-37.76	peak
5	2402.000	48.71	-8.63	40.08	/	/	fundamental
6	2992.000	43.88	-6.24	37.64	74.00	-36.36	peak

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 3.3V

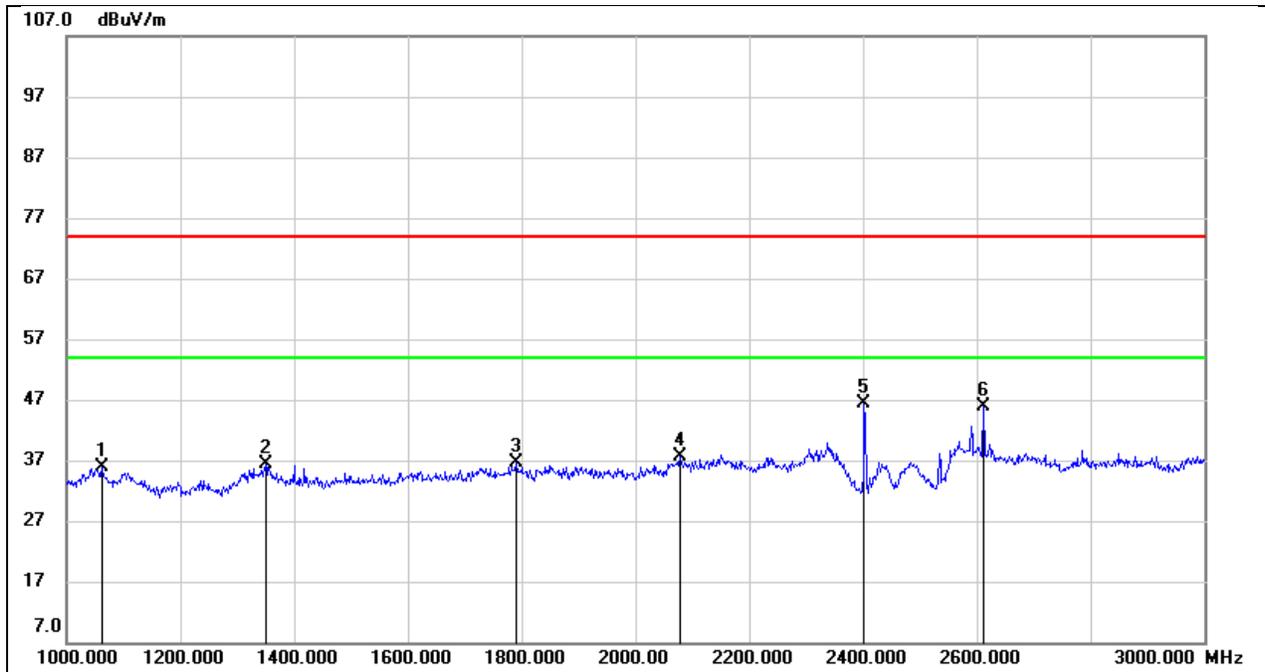


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1062.000	49.96	-14.06	35.90	74.00	-38.10	peak
2	1350.000	49.07	-12.68	36.39	74.00	-37.61	peak
3	1790.000	46.87	-10.15	36.72	74.00	-37.28	peak
4	2078.000	47.53	-9.97	37.56	74.00	-36.44	peak
5	2402.000	54.98	-8.63	46.35	/	/	fundamental
6	2612.000	53.72	-7.75	45.97	74.00	-28.03	peak

Test Mode:	BLE 1M	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	DC 3.3V

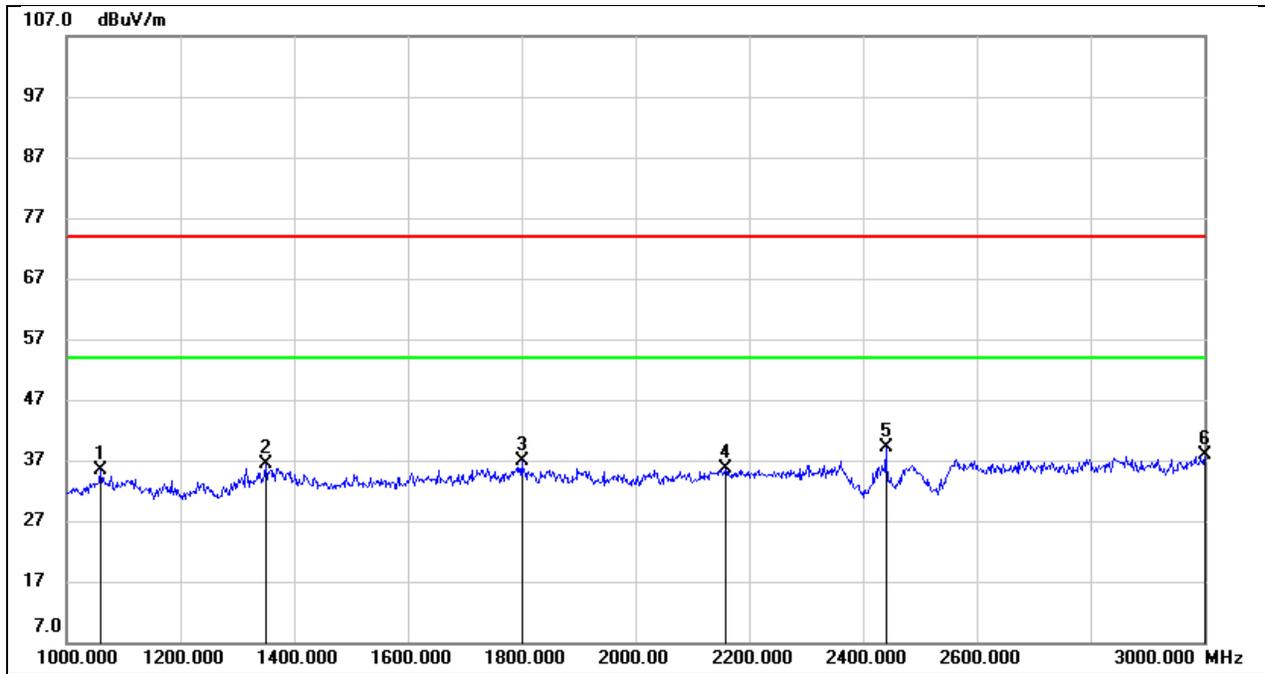


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1060.000	49.42	-14.06	35.36	74.00	-38.64	peak
2	1350.000	48.95	-12.68	36.27	74.00	-37.73	peak
3	1800.000	46.89	-10.08	36.81	74.00	-37.19	peak
4	2158.000	45.34	-9.64	35.70	74.00	-38.30	peak
5	2440.000	47.69	-8.46	39.23	/	/	fundamental
6	3000.000	44.07	-6.21	37.86	74.00	-36.14	peak

Test Mode:	BLE 1M	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	DC 3.3V

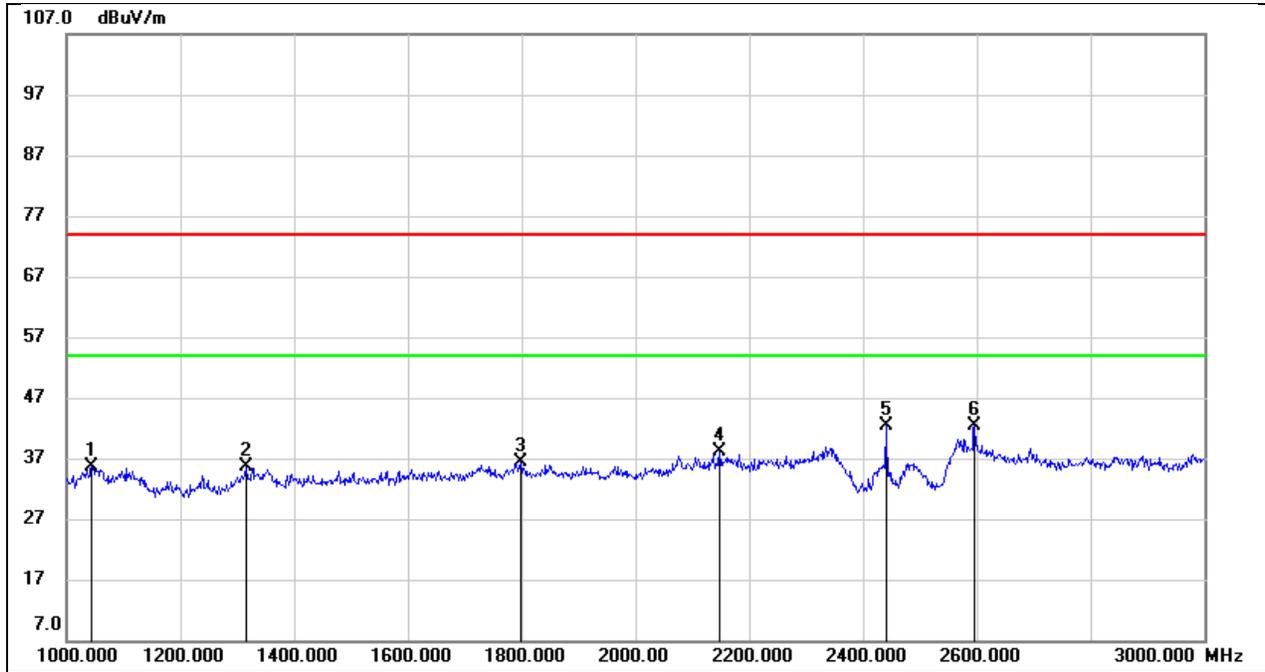


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1044.000	49.78	-14.14	35.64	74.00	-38.36	peak
2	1316.000	48.46	-12.86	35.60	74.00	-38.40	peak
3	1798.000	46.46	-10.09	36.37	74.00	-37.63	peak
4	2148.000	47.76	-9.68	38.08	74.00	-35.92	peak
5	2440.000	50.80	-8.46	42.34	/	/	fundamental
6	2596.000	50.08	-7.82	42.26	74.00	-31.74	peak

Test Mode:	BLE 1M	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	DC 3.3V

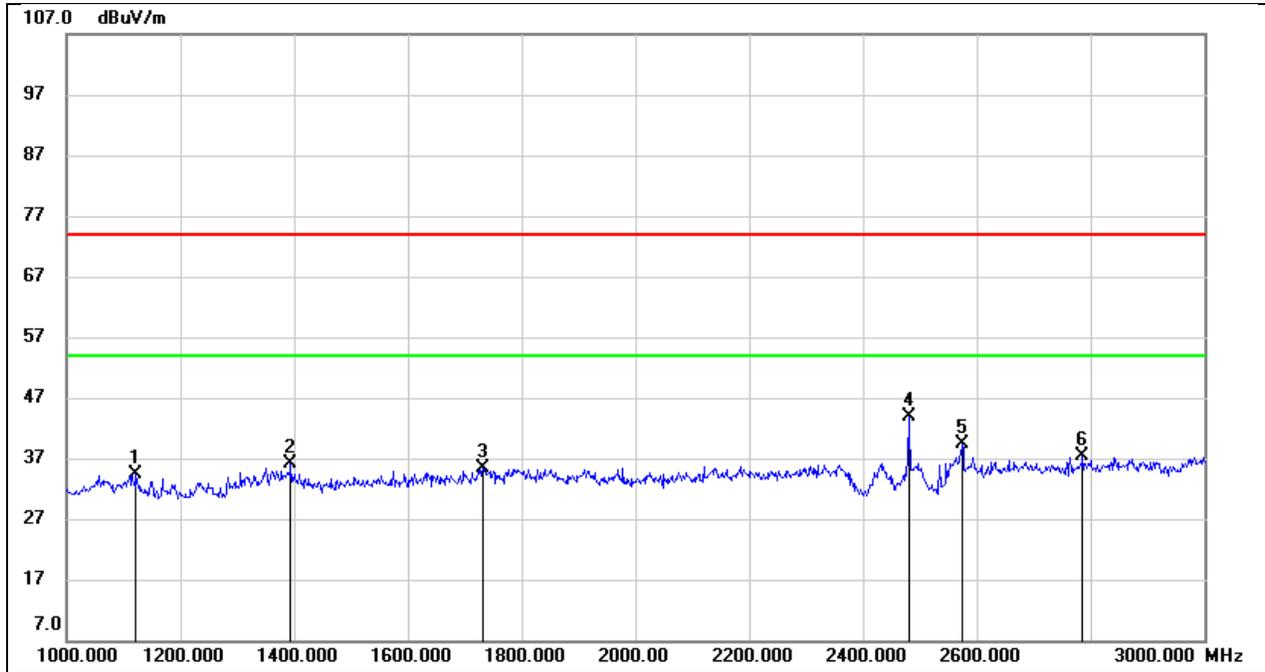

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1122.000	48.05	-13.78	34.27	74.00	-39.73	peak
2	1394.000	48.56	-12.47	36.09	74.00	-37.91	peak
3	1732.000	46.01	-10.53	35.48	74.00	-38.52	peak
4	2480.000	52.18	-8.29	43.89	/	/	fundamental
5	2574.000	47.22	-7.91	39.31	74.00	-34.69	peak
6	2786.000	44.38	-7.09	37.29	74.00	-36.71	peak


Test Mode:	BLE 1M	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	DC 3.3V

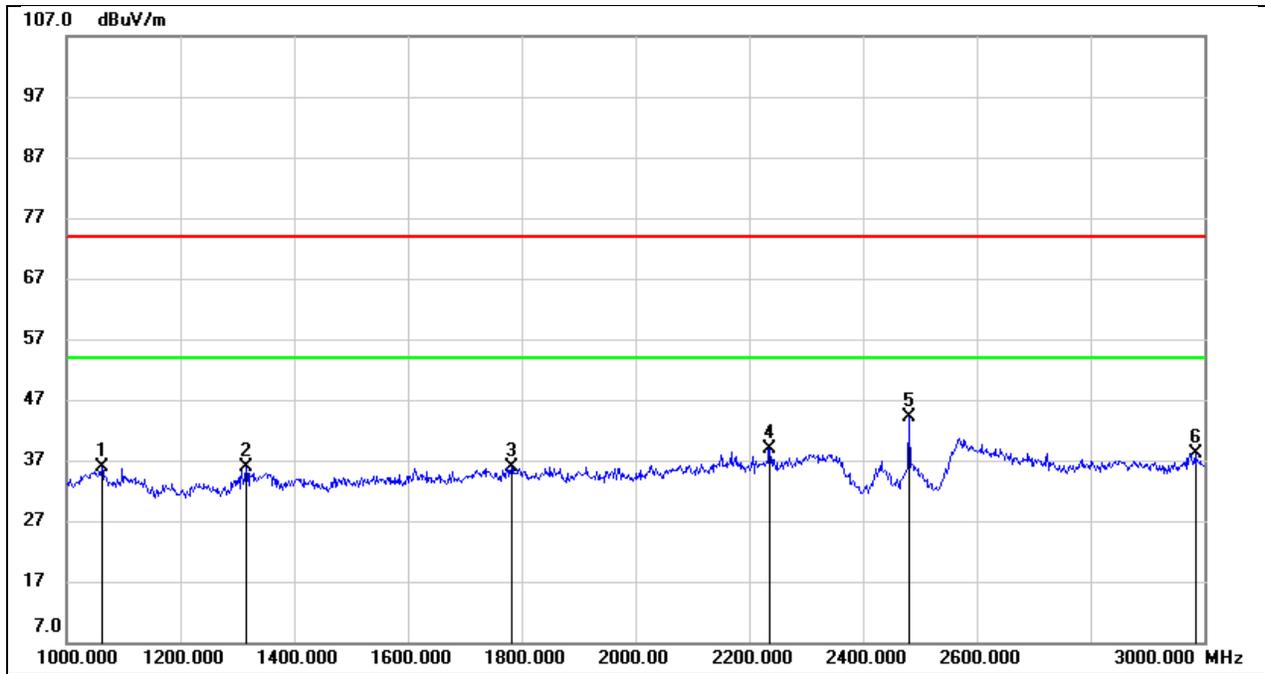

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1062.000	49.98	-14.06	35.92	74.00	-38.08	peak
2	1316.000	48.82	-12.86	35.96	74.00	-38.04	peak
3	1782.000	46.17	-10.19	35.98	74.00	-38.02	peak
4	2236.000	48.22	-9.31	38.91	74.00	-35.09	peak
5	2480.000	52.39	-8.29	44.10	/	/	fundamental
6	2984.000	44.51	-6.28	38.23	74.00	-35.77	peak


### 8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.3V

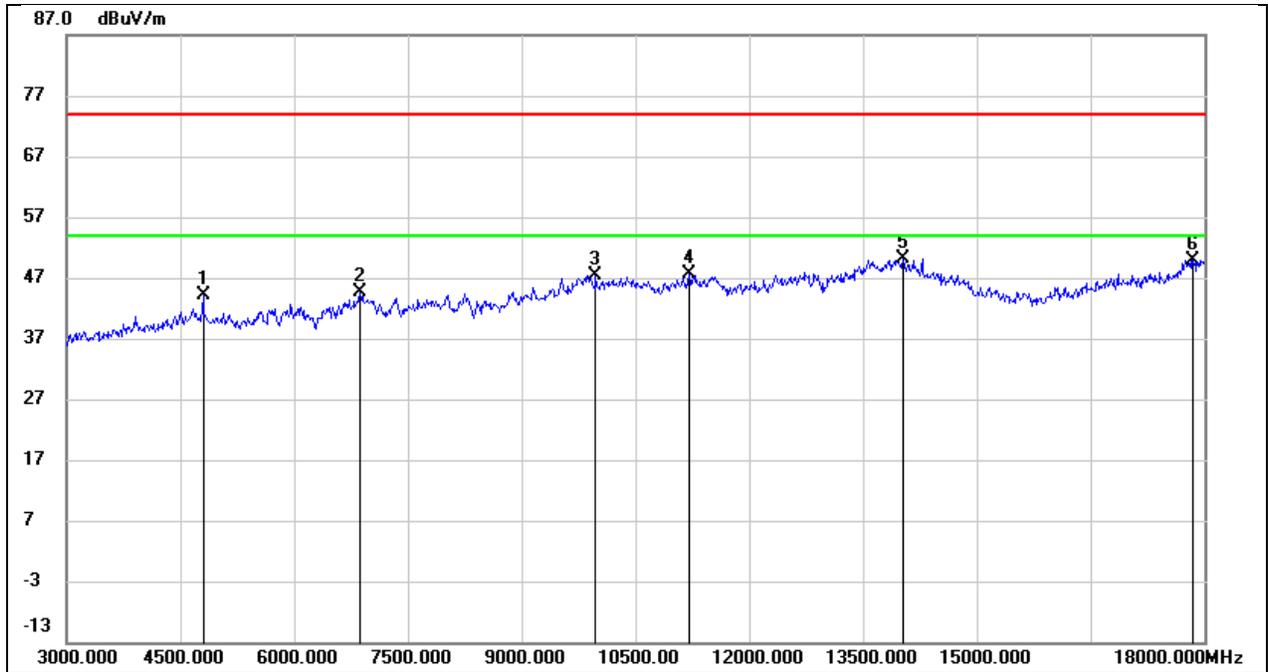


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	43.59	0.57	44.16	74.00	-29.84	peak
2	6870.000	38.43	6.12	44.55	74.00	-29.45	peak
3	9975.000	34.03	13.23	47.26	74.00	-26.74	peak
4	11205.000	30.32	17.27	47.59	74.00	-26.41	peak
5	14025.000	26.13	24.02	50.15	74.00	-23.85	peak
6	17850.000	22.67	27.22	49.89	74.00	-24.11	peak

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 3.3V

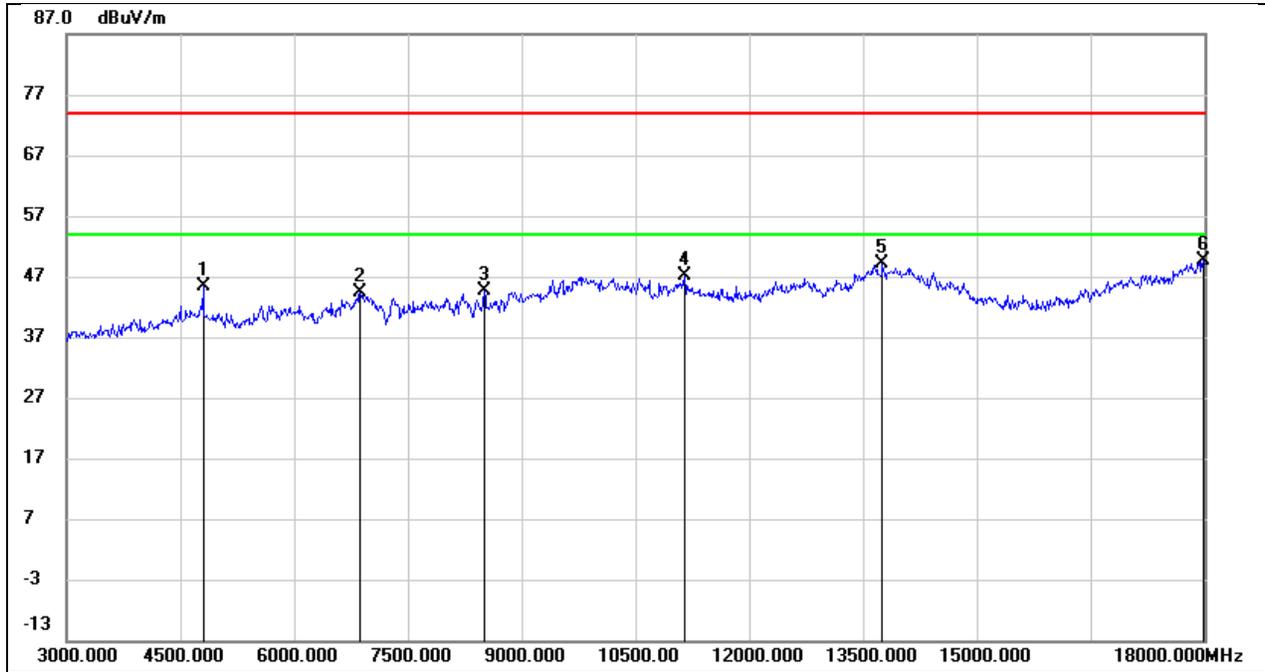


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	44.82	0.57	45.39	74.00	-28.61	peak
2	6870.000	38.18	6.12	44.30	74.00	-29.70	peak
3	8505.000	35.67	9.03	44.70	74.00	-29.30	peak
4	11145.000	30.04	17.02	47.06	74.00	-26.94	peak
5	13755.000	25.82	23.21	49.03	74.00	-24.97	peak
6	17985.000	21.18	28.41	49.59	74.00	-24.41	peak

Test Mode:	BLE 1M	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	DC 3.3V

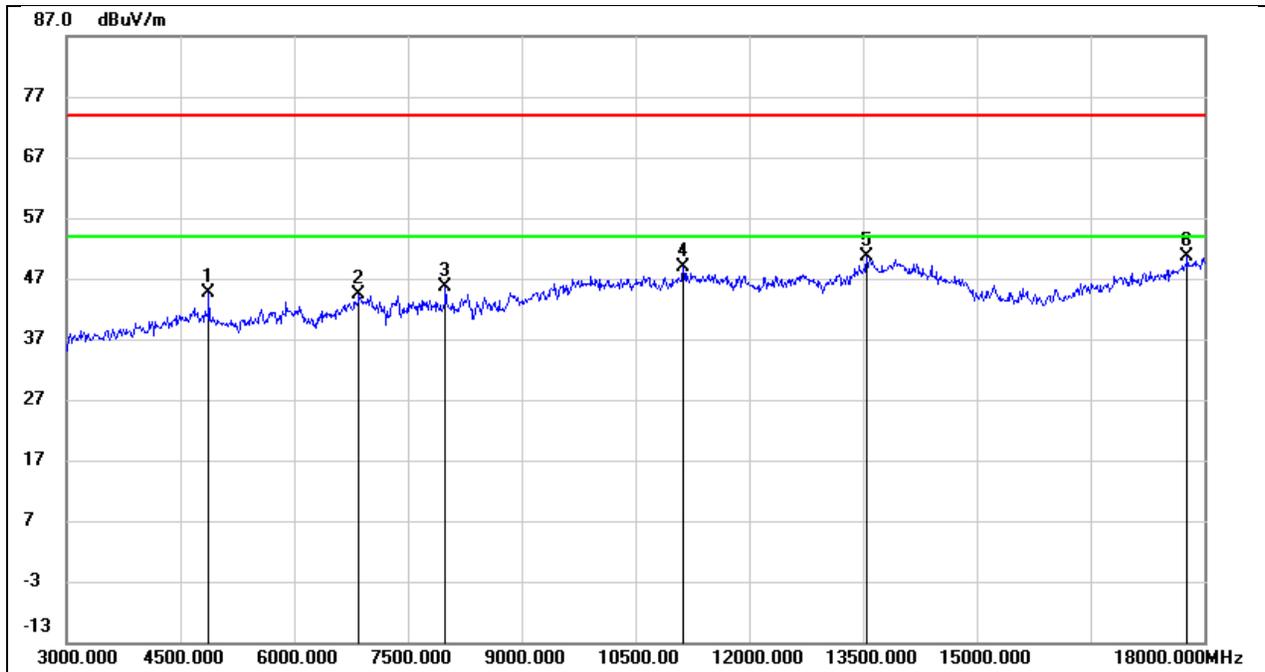


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	43.95	0.75	44.70	74.00	-29.30	peak
2	6855.000	38.28	6.08	44.36	74.00	-29.64	peak
3	7995.000	37.39	8.12	45.51	74.00	-28.49	peak
4	11130.000	31.99	16.94	48.93	74.00	-25.07	peak
5	13545.000	27.60	22.91	50.51	74.00	-23.49	peak
6	17775.000	23.88	26.63	50.51	74.00	-23.49	peak

Test Mode:	BLE 1M	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	DC 3.3V

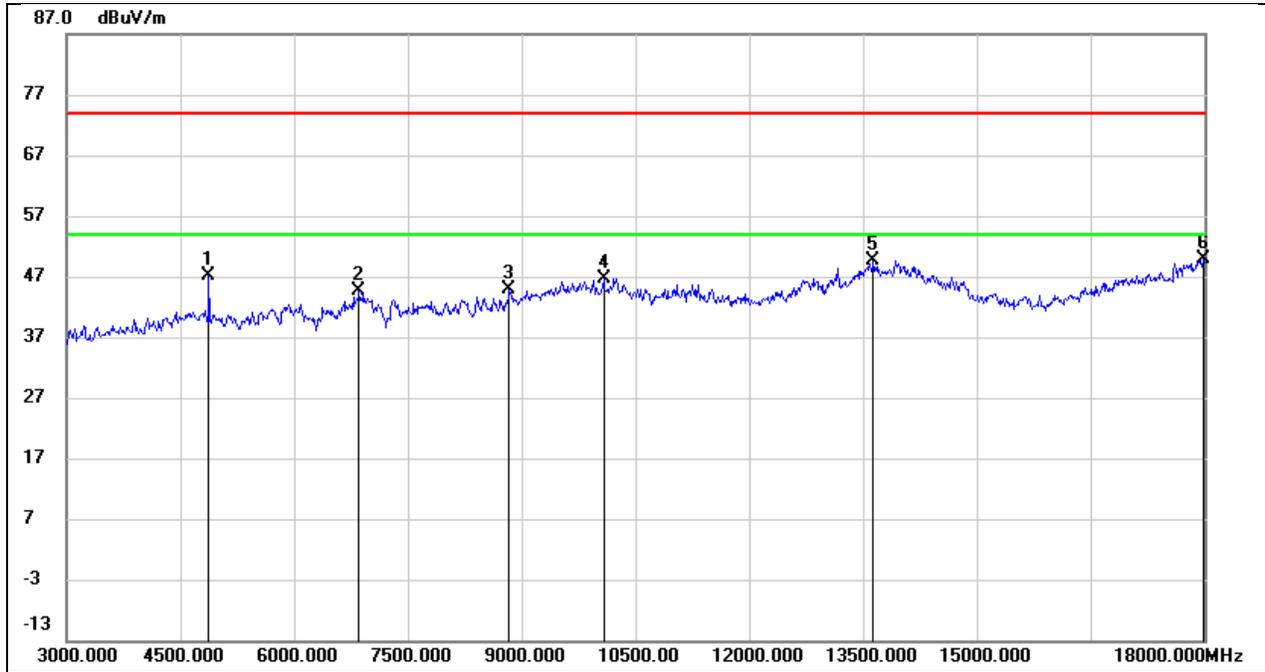


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	46.41	0.75	47.16	74.00	-26.84	peak
2	6855.000	38.47	6.08	44.55	74.00	-29.45	peak
3	8835.000	35.25	9.60	44.85	74.00	-29.15	peak
4	10080.000	33.34	13.30	46.64	74.00	-27.36	peak
5	13635.000	26.49	23.05	49.54	74.00	-24.46	peak
6	17985.000	21.56	28.41	49.97	74.00	-24.03	peak

Test Mode:	BLE 1M	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	DC 3.3V

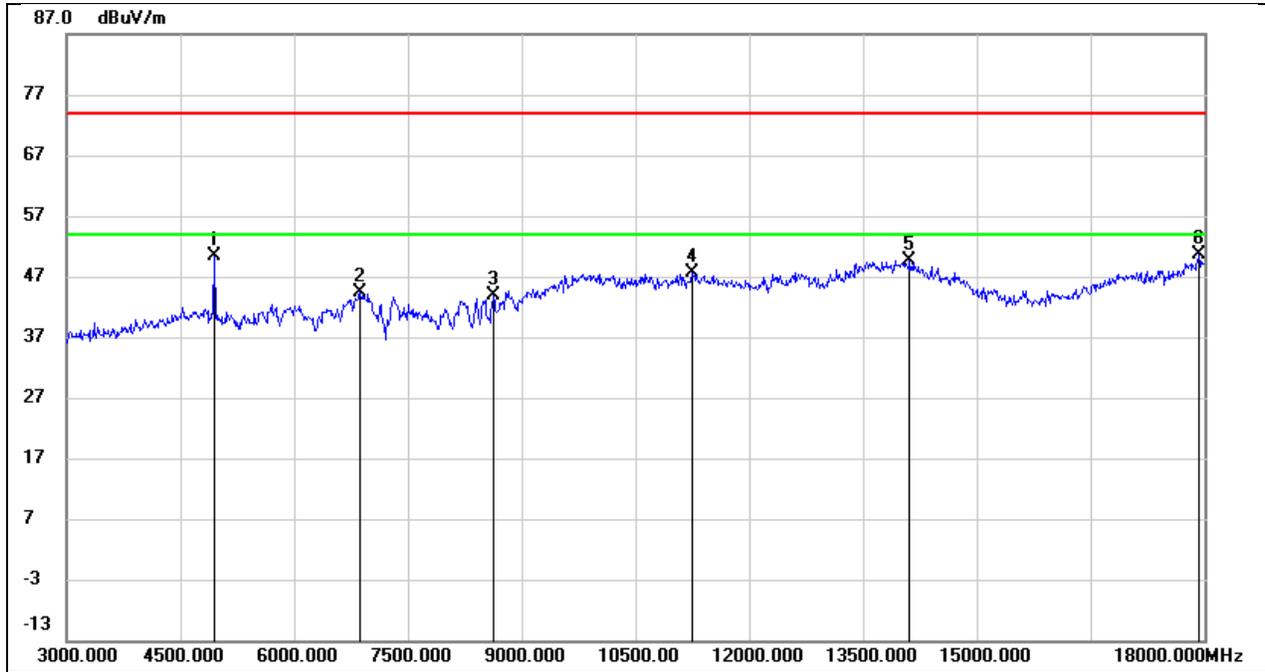


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	49.34	0.93	50.27	74.00	-23.73	peak
2	6870.000	38.27	6.12	44.39	74.00	-29.61	peak
3	8625.000	34.45	9.31	43.76	74.00	-30.24	peak
4	11250.000	30.21	17.31	47.52	74.00	-26.48	peak
5	14115.000	25.78	23.75	49.53	74.00	-24.47	peak
6	17925.000	22.64	27.87	50.51	74.00	-23.49	peak

Test Mode:	BLE 1M	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	DC 3.3V

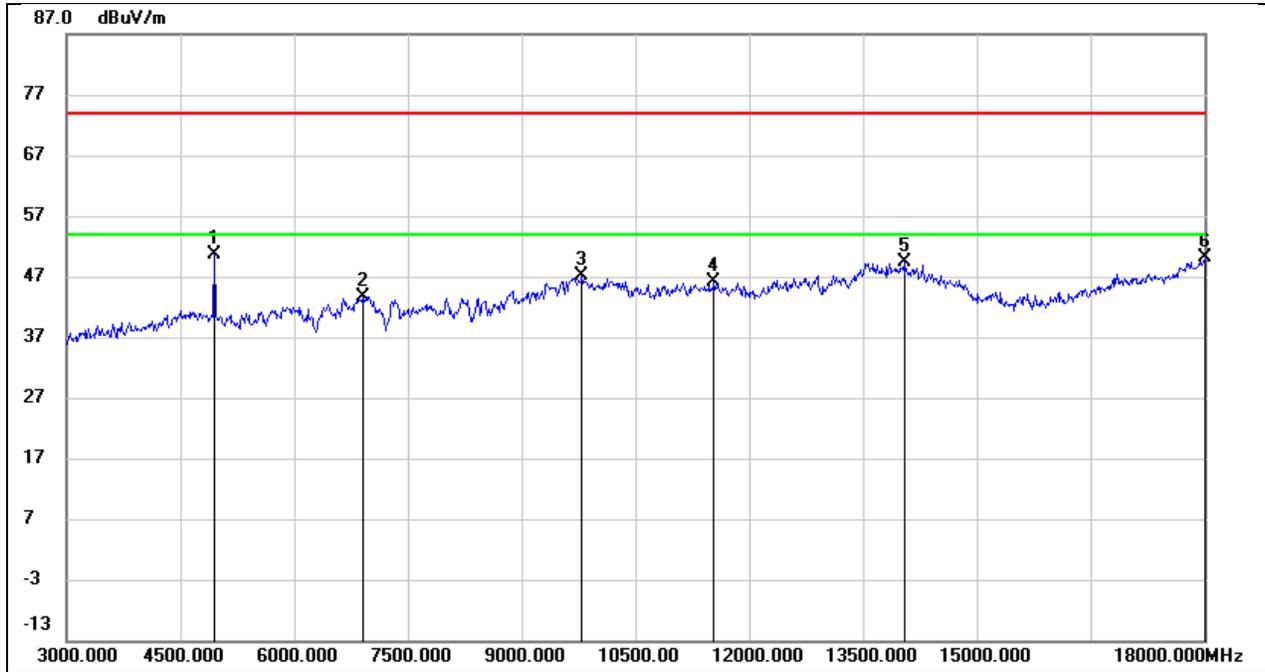


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	49.79	0.93	50.72	74.00	-23.28	peak
2	6900.000	37.54	6.19	43.73	74.00	-30.27	peak
3	9795.000	34.09	13.13	47.22	74.00	-26.78	peak
4	11535.000	28.42	17.77	46.19	74.00	-27.81	peak
5	14040.000	25.47	23.97	49.44	74.00	-24.56	peak
6	18000.000	21.70	28.54	50.24	74.00	-23.76	peak

Test Mode:	BLE 2M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.3V

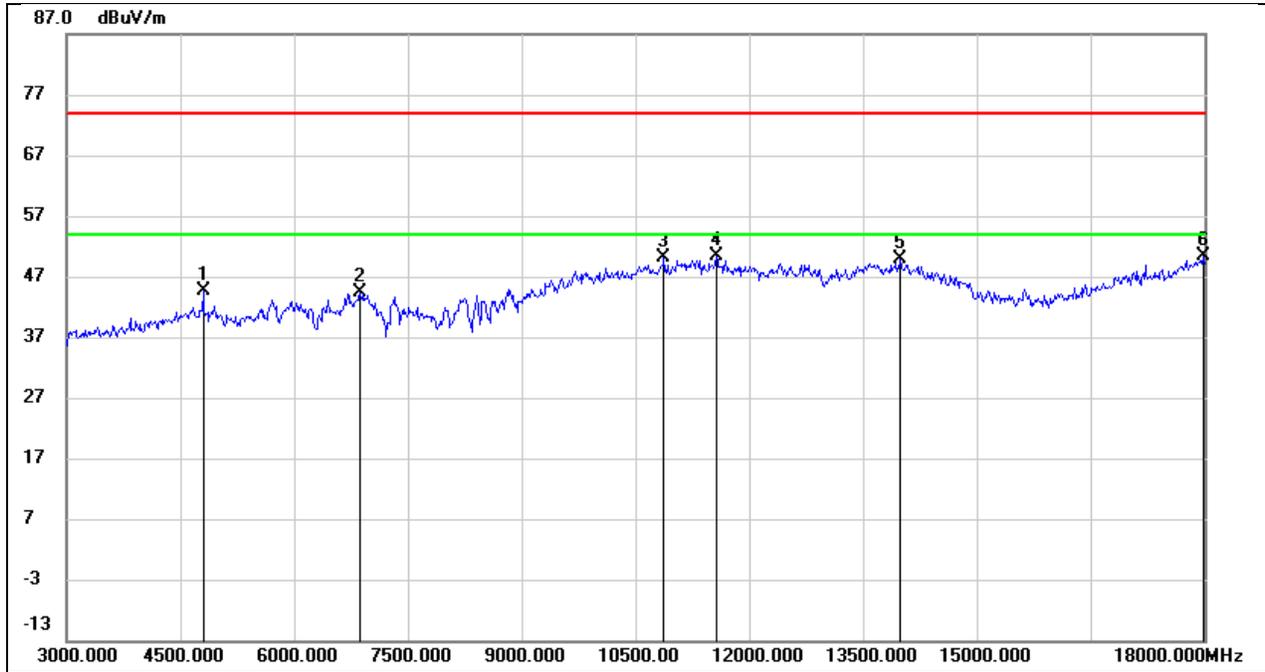


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	44.12	0.57	44.69	74.00	-29.31	peak
2	6870.000	38.37	6.12	44.49	74.00	-29.51	peak
3	10875.000	34.47	15.70	50.17	74.00	-23.83	peak
4	11565.000	32.41	17.86	50.27	74.00	-23.73	peak
5	13995.000	25.89	24.08	49.97	74.00	-24.03	peak
6	17985.000	21.95	28.41	50.36	74.00	-23.64	peak

Test Mode:	BLE 2M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 3.3V

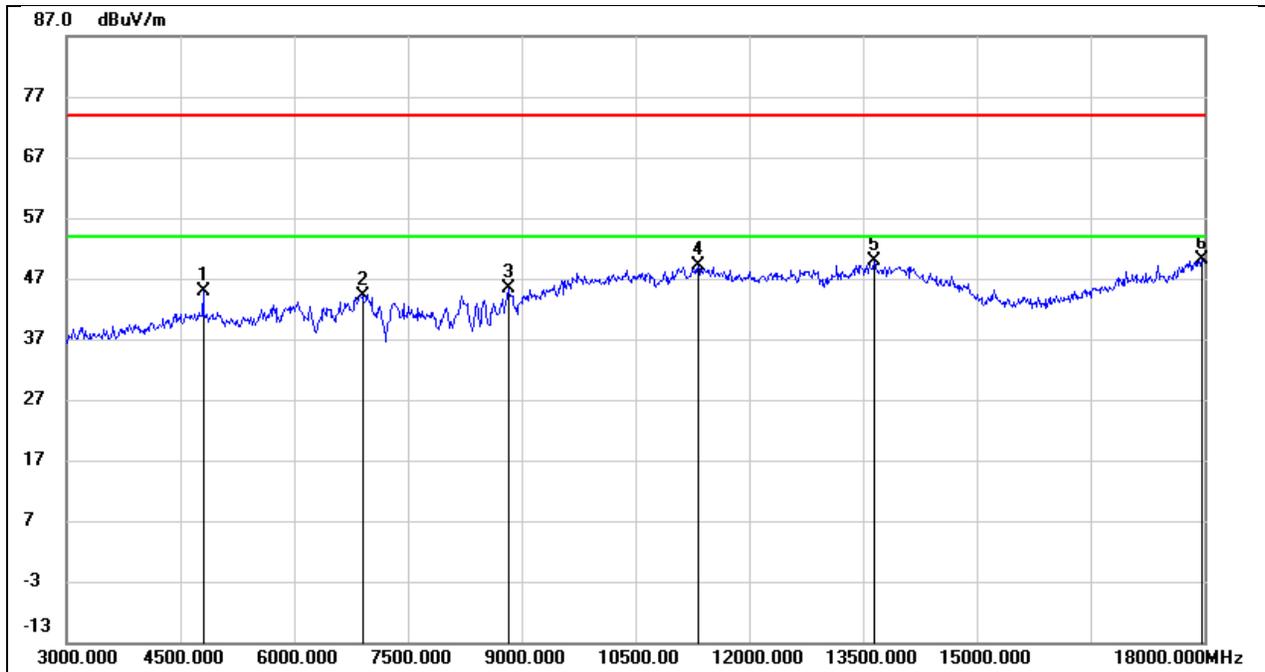


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	44.40	0.57	44.97	74.00	-29.03	peak
2	6900.000	38.04	6.19	44.23	74.00	-29.77	peak
3	8820.000	35.81	9.56	45.37	74.00	-28.63	peak
4	11325.000	31.71	17.38	49.09	74.00	-24.91	peak
5	13650.000	26.70	23.06	49.76	74.00	-24.24	peak
6	17970.000	21.88	28.27	50.15	74.00	-23.85	peak

Test Mode:	BLE 2M	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	DC 3.3V

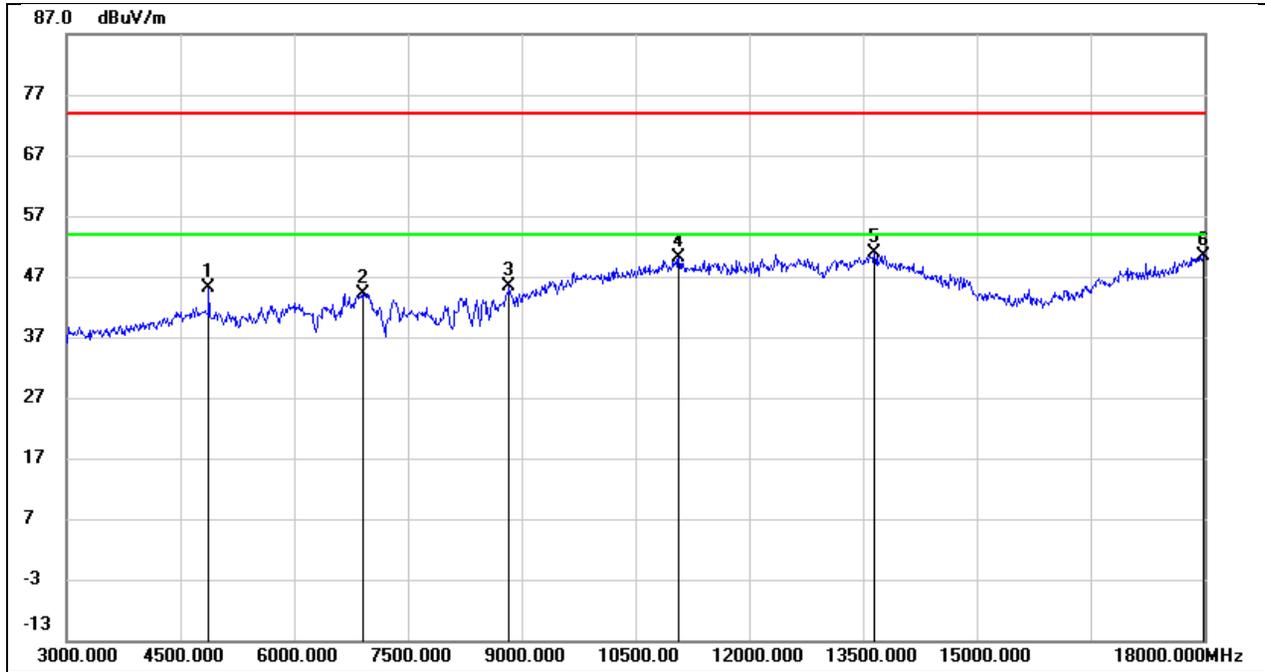


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.46	0.75	45.21	74.00	-28.79	peak
2	6915.000	37.99	6.24	44.23	74.00	-29.77	peak
3	8835.000	35.77	9.60	45.37	74.00	-28.63	peak
4	11070.000	33.35	16.67	50.02	74.00	-23.98	peak
5	13650.000	27.80	23.06	50.86	74.00	-23.14	peak
6	17985.000	22.04	28.41	50.45	74.00	-23.55	peak

Test Mode:	BLE 2M	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	DC 3.3V

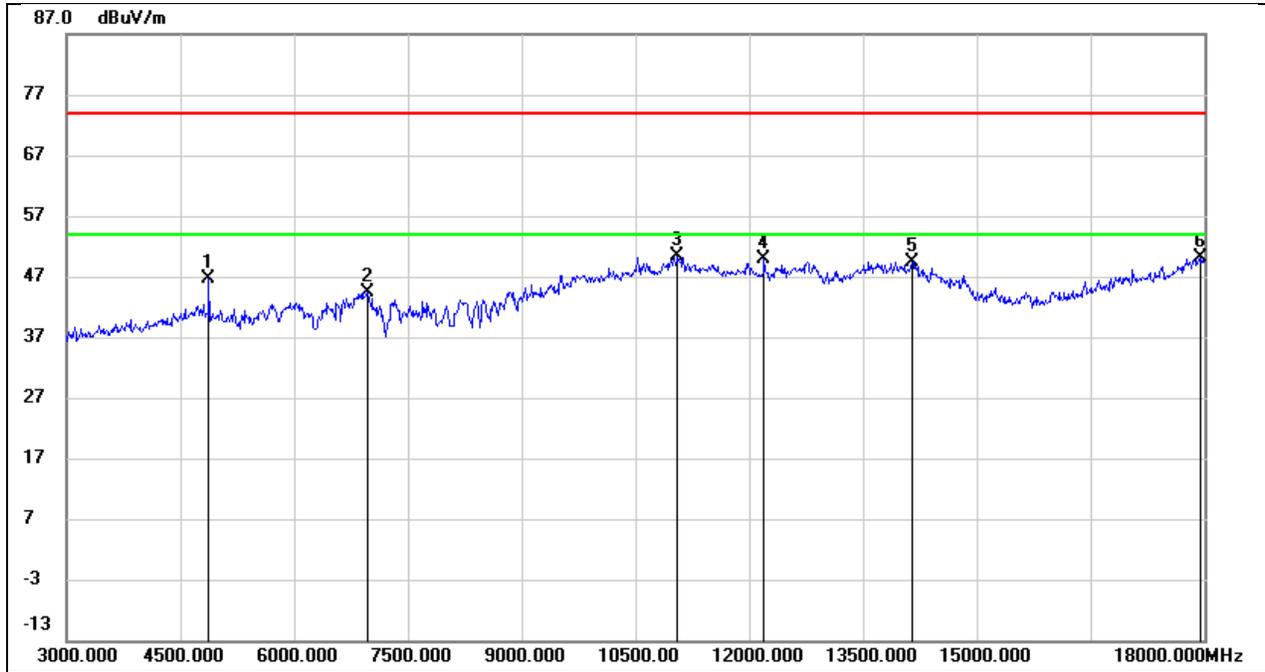


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	45.91	0.75	46.66	74.00	-27.34	peak
2	6960.000	38.14	6.35	44.49	74.00	-29.51	peak
3	11055.000	33.67	16.60	50.27	74.00	-23.73	peak
4	12195.000	30.70	19.10	49.80	74.00	-24.20	peak
5	14145.000	25.81	23.65	49.46	74.00	-24.54	peak
6	17955.000	22.03	28.14	50.17	74.00	-23.83	peak

Test Mode:	BLE 2M	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	DC 3.3V

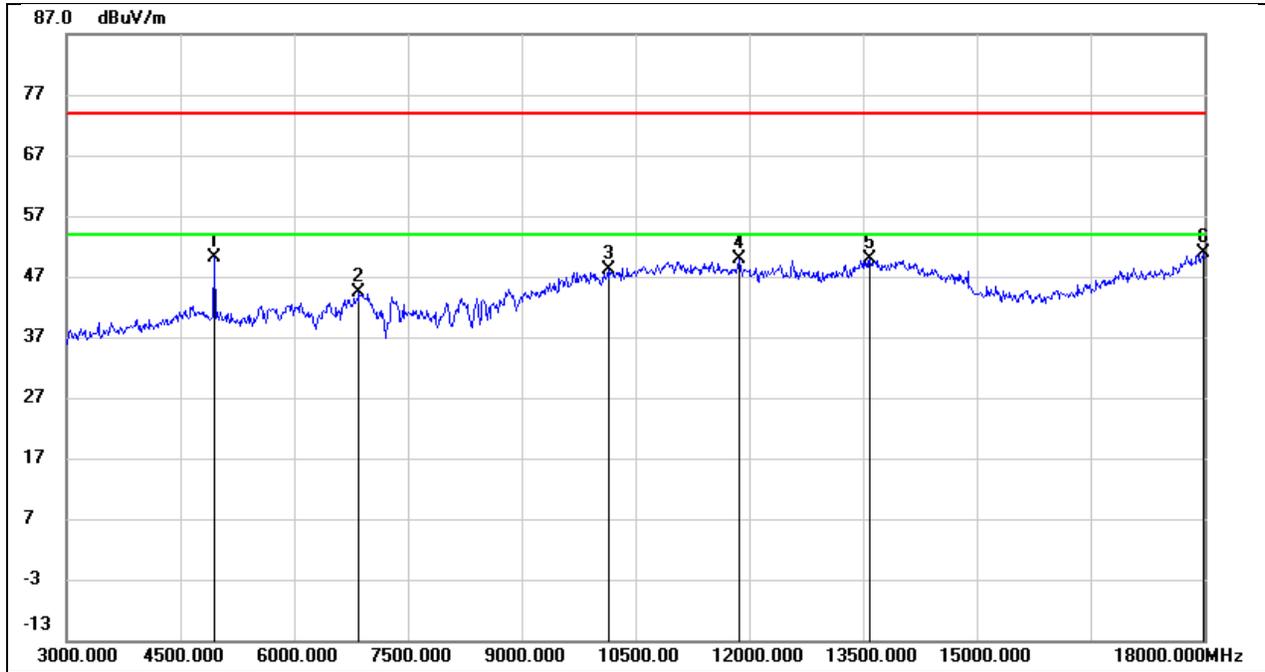


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	49.24	0.93	50.17	74.00	-23.83	peak
2	6855.000	38.28	6.08	44.36	74.00	-29.64	peak
3	10140.000	34.65	13.36	48.01	74.00	-25.99	peak
4	11865.000	31.21	18.57	49.78	74.00	-24.22	peak
5	13590.000	26.89	22.98	49.87	74.00	-24.13	peak
6	17985.000	22.40	28.41	50.81	74.00	-23.19	peak

Test Mode:	BLE 2M	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	DC 3.3V

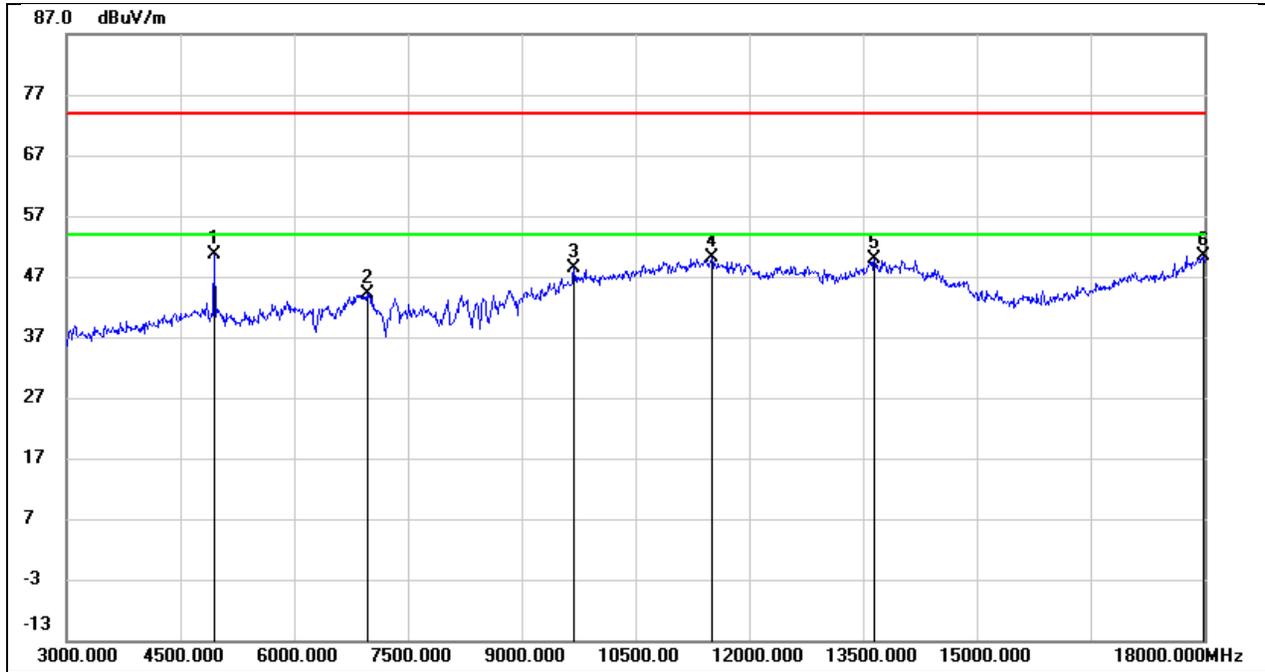


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	49.70	0.93	50.63	74.00	-23.37	peak
2	6960.000	37.79	6.35	44.14	74.00	-29.86	peak
3	9690.000	35.52	12.88	48.40	74.00	-25.60	peak
4	11505.000	32.32	17.70	50.02	74.00	-23.98	peak
5	13650.000	26.81	23.06	49.87	74.00	-24.13	peak
6	17985.000	22.05	28.41	50.46	74.00	-23.54	peak

Test Mode:	BLE 125K	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.3V

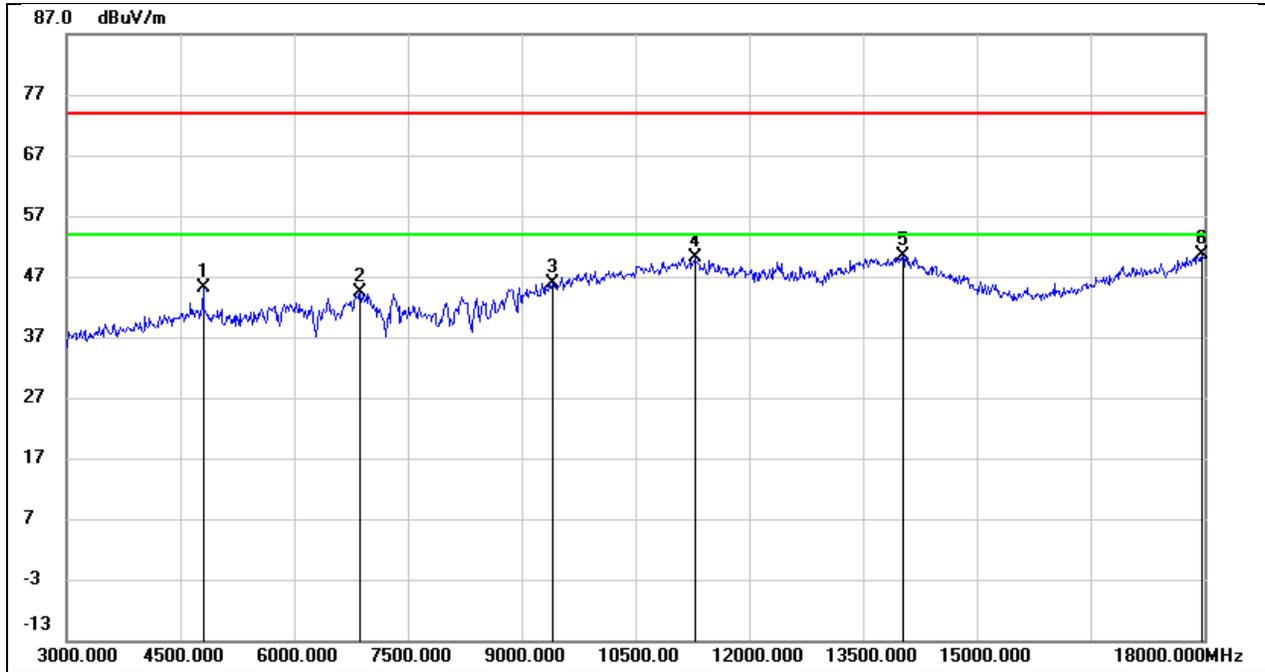


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	44.50	0.57	45.07	74.00	-28.93	peak
2	6870.000	38.21	6.12	44.33	74.00	-29.67	peak
3	9405.000	34.19	11.79	45.98	74.00	-28.02	peak
4	11280.000	32.87	17.33	50.20	74.00	-23.80	peak
5	14025.000	26.36	24.02	50.38	74.00	-23.62	peak
6	17970.000	22.46	28.27	50.73	74.00	-23.27	peak

Test Mode:	BLE 125K	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 3.3V

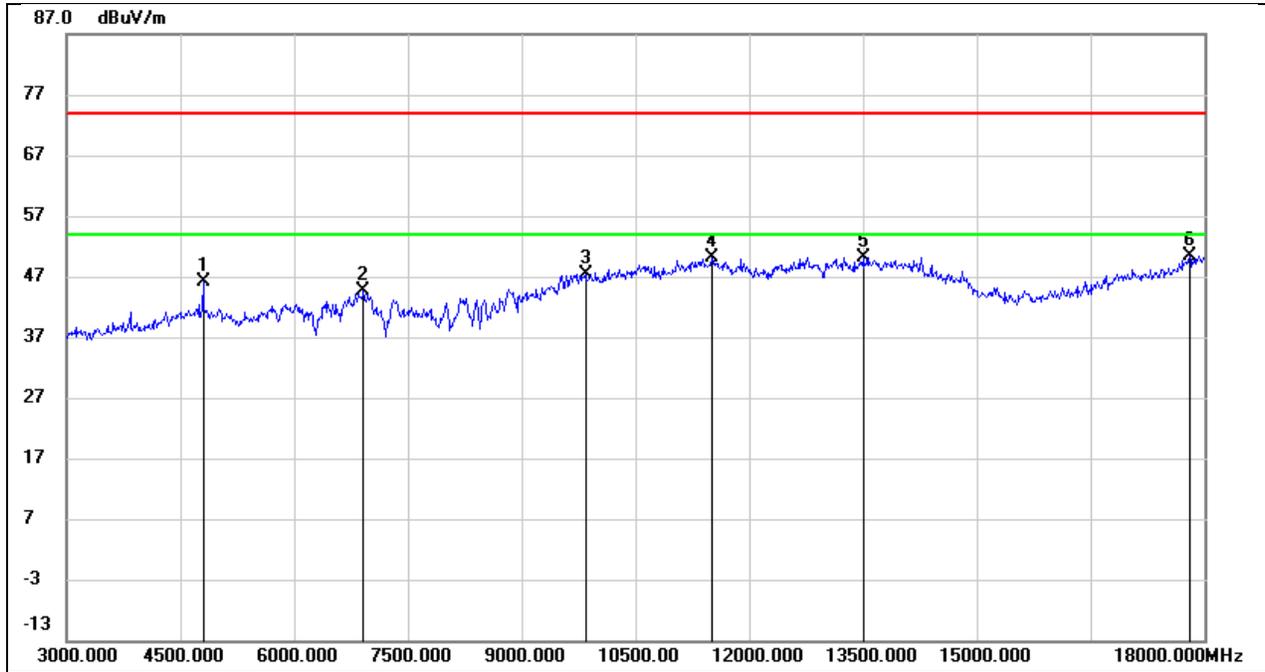


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	45.63	0.57	46.20	74.00	-27.80	peak
2	6915.000	38.41	6.24	44.65	74.00	-29.35	peak
3	9840.000	34.23	13.17	47.40	74.00	-26.60	peak
4	11505.000	32.51	17.70	50.21	74.00	-23.79	peak
5	13500.000	27.39	22.84	50.23	74.00	-23.77	peak
6	17805.000	23.47	26.82	50.29	74.00	-23.71	peak

Test Mode:	BLE 125K	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	DC 3.3V

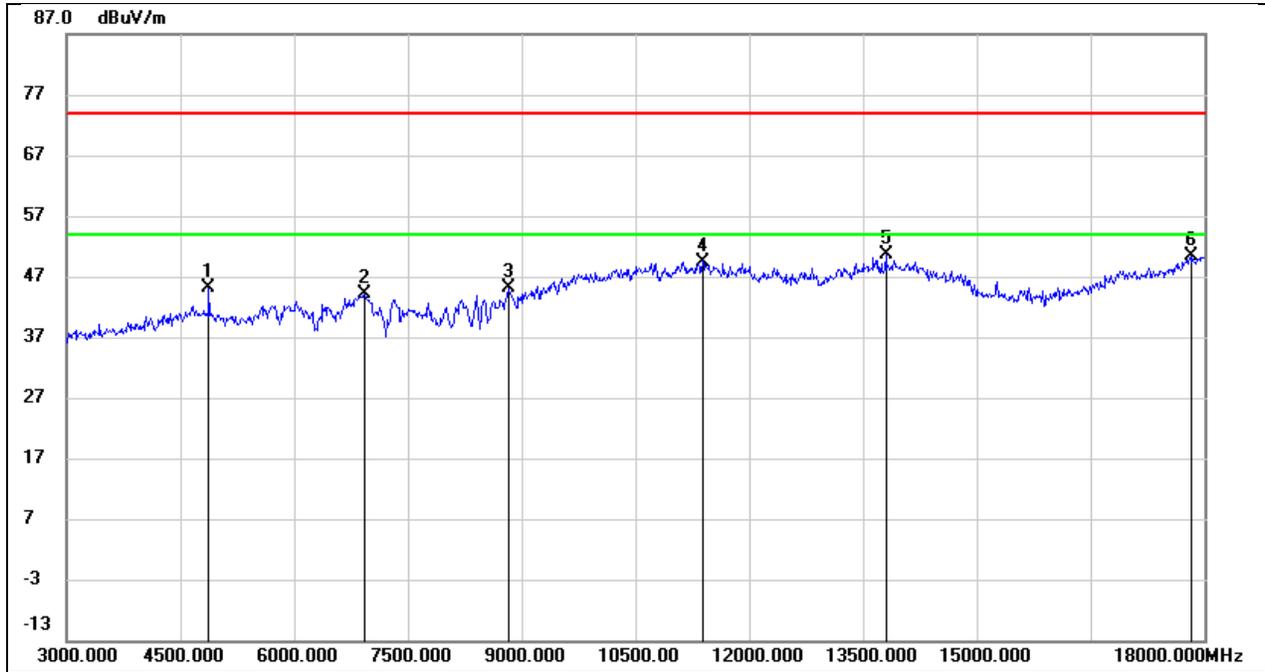


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.47	0.75	45.22	74.00	-28.78	peak
2	6930.000	37.94	6.27	44.21	74.00	-29.79	peak
3	8820.000	35.61	9.56	45.17	74.00	-28.83	peak
4	11385.000	32.07	17.43	49.50	74.00	-24.50	peak
5	13800.000	27.40	23.27	50.67	74.00	-23.33	peak
6	17835.000	23.26	27.09	50.35	74.00	-23.65	peak

Test Mode:	BLE 125K	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	DC 3.3V

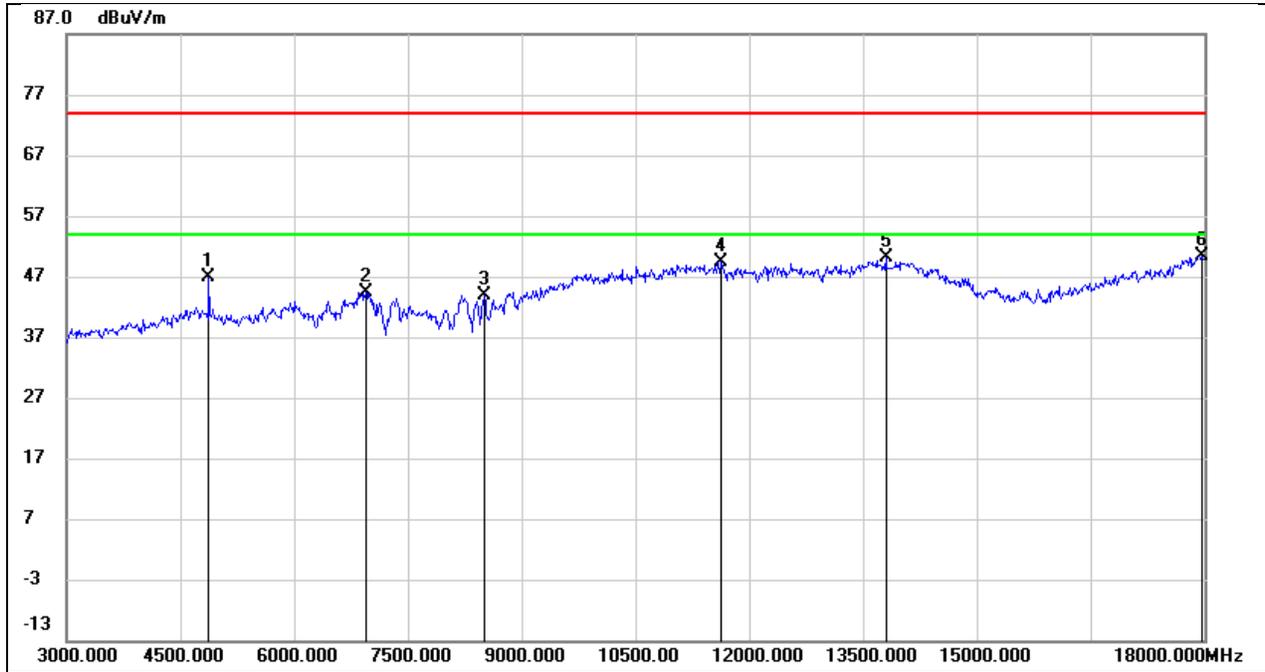


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	46.19	0.75	46.94	74.00	-27.06	peak
2	6945.000	38.13	6.31	44.44	74.00	-29.56	peak
3	8505.000	34.84	9.03	43.87	74.00	-30.13	peak
4	11625.000	31.33	18.01	49.34	74.00	-24.66	peak
5	13800.000	26.74	23.27	50.01	74.00	-23.99	peak
6	17970.000	22.06	28.27	50.33	74.00	-23.67	peak

Test Mode:	BLE 125K	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	DC 3.3V

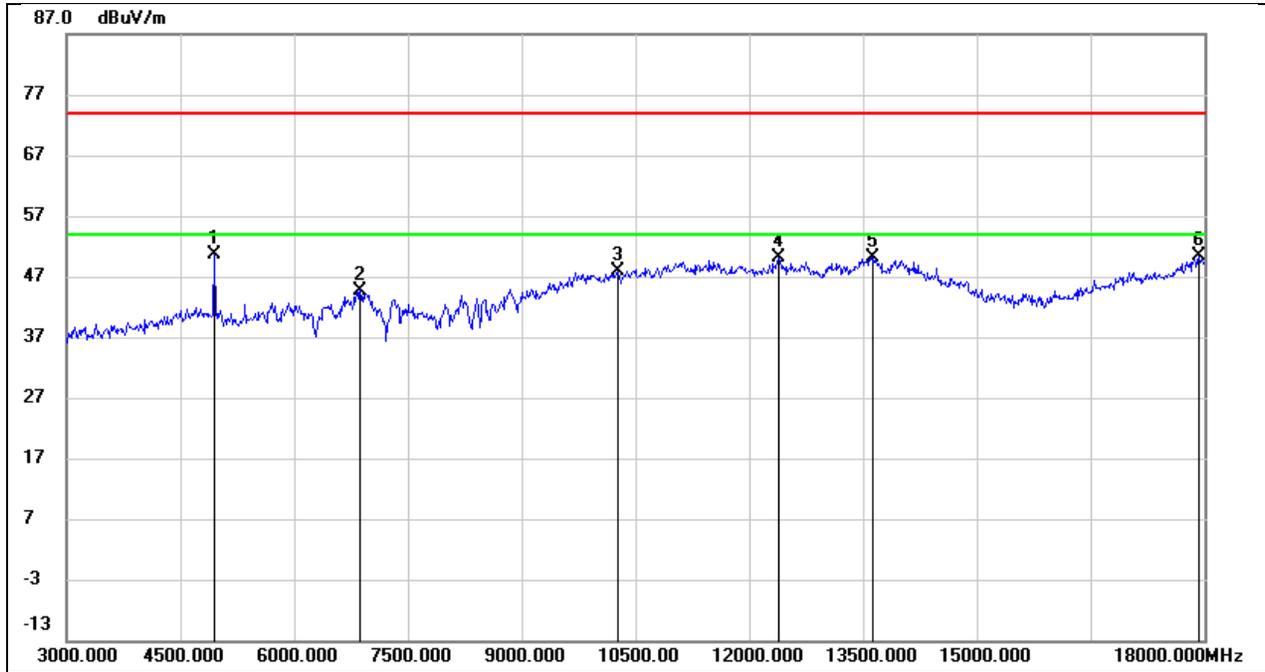


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	49.69	0.93	50.62	74.00	-23.38	peak
2	6870.000	38.63	6.12	44.75	74.00	-29.25	peak
3	10260.000	34.39	13.55	47.94	74.00	-26.06	peak
4	12390.000	30.40	19.61	50.01	74.00	-23.99	peak
5	13635.000	27.00	23.05	50.05	74.00	-23.95	peak
6	17925.000	22.39	27.87	50.26	74.00	-23.74	peak

Test Mode:	BLE 125K	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	DC 3.3V

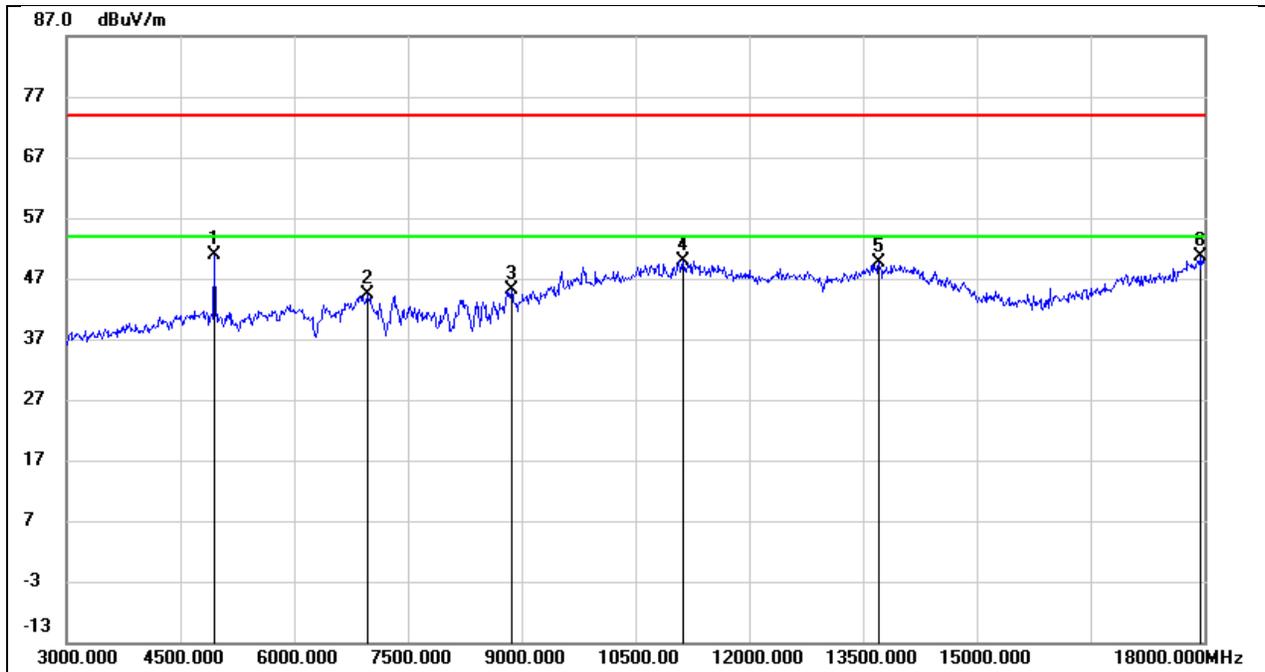


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	49.97	0.93	50.90	74.00	-23.10	peak
2	6975.000	37.98	6.39	44.37	74.00	-29.63	peak
3	8865.000	35.54	9.68	45.22	74.00	-28.78	peak
4	11130.000	32.92	16.94	49.86	74.00	-24.14	peak
5	13710.000	26.36	23.15	49.51	74.00	-24.49	peak
6	17955.000	22.55	28.14	50.69	74.00	-23.31	peak

Test Mode:	BLE 500K	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.3V

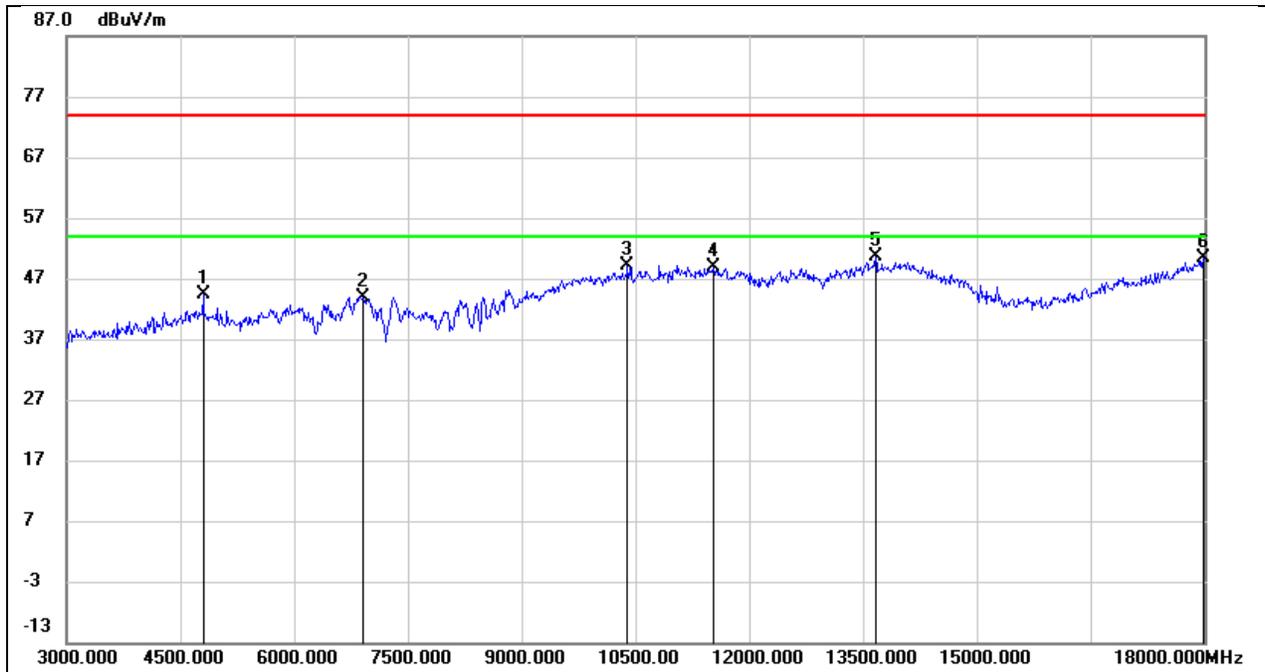


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	43.70	0.57	44.27	74.00	-29.73	peak
2	6900.000	37.77	6.19	43.96	74.00	-30.04	peak
3	10395.000	35.27	13.85	49.12	74.00	-24.88	peak
4	11520.000	31.22	17.73	48.95	74.00	-25.05	peak
5	13665.000	27.64	23.09	50.73	74.00	-23.27	peak
6	17985.000	22.05	28.41	50.46	74.00	-23.54	peak

Test Mode:	BLE 500K	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 3.3V

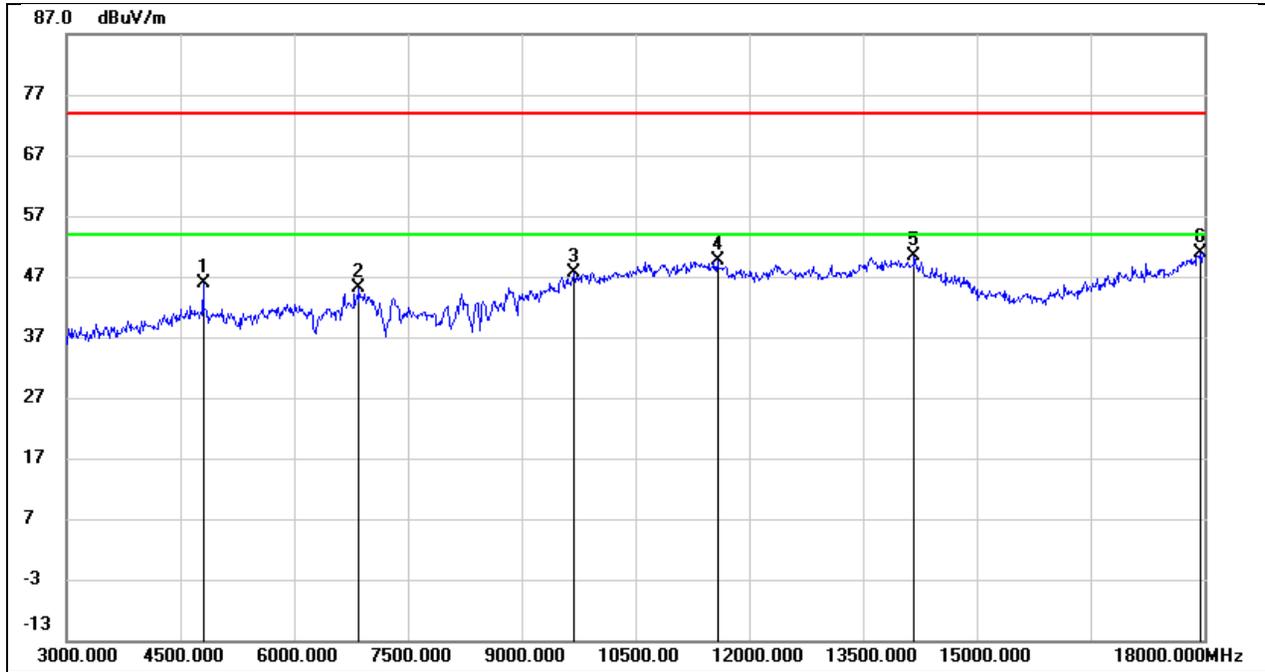


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	45.23	0.57	45.80	74.00	-28.20	peak
2	6855.000	38.96	6.08	45.04	74.00	-28.96	peak
3	9690.000	34.73	12.88	47.61	74.00	-26.39	peak
4	11580.000	31.62	17.89	49.51	74.00	-24.49	peak
5	14175.000	26.74	23.57	50.31	74.00	-23.69	peak
6	17940.000	22.84	28.02	50.86	74.00	-23.14	peak

Test Mode:	BLE 500K	Frequency(MHz):	2440
Polarity:	Horizontal	Test Voltage:	DC 3.3V

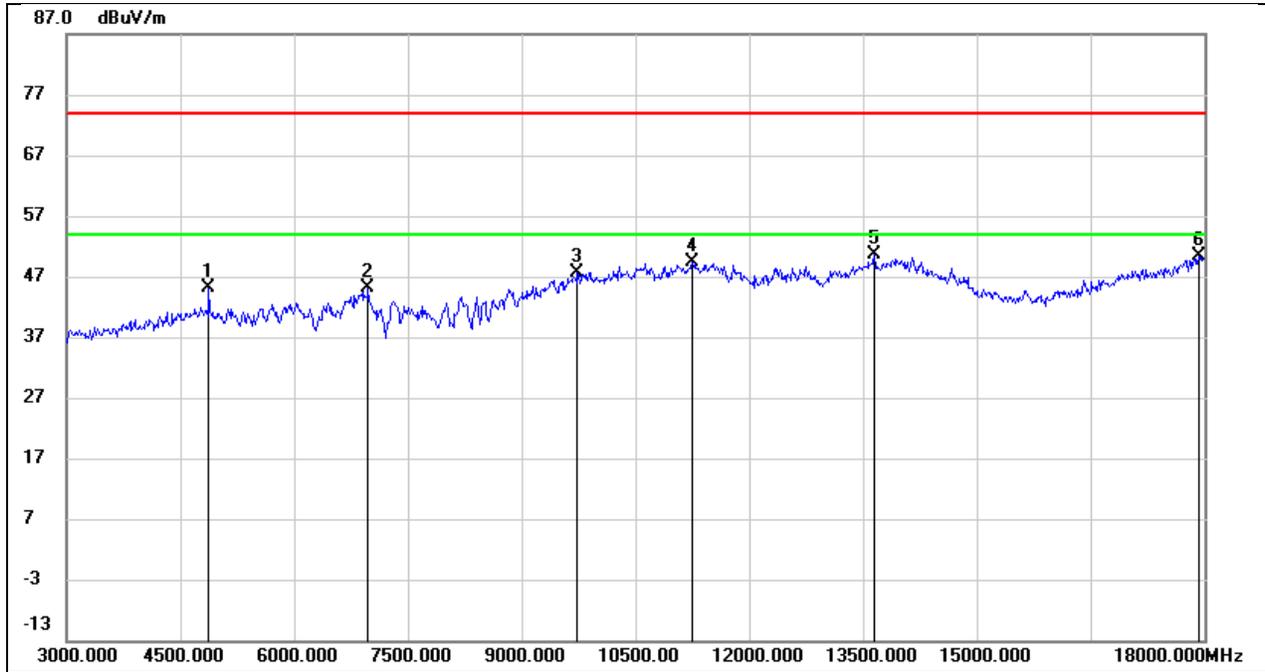


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.45	0.75	45.20	74.00	-28.80	peak
2	6975.000	38.83	6.39	45.22	74.00	-28.78	peak
3	9735.000	34.57	12.99	47.56	74.00	-26.44	peak
4	11250.000	32.01	17.31	49.32	74.00	-24.68	peak
5	13650.000	27.50	23.06	50.56	74.00	-23.44	peak
6	17925.000	22.39	27.87	50.26	74.00	-23.74	peak

Test Mode:	BLE 500K	Frequency(MHz):	2440
Polarity:	Vertical	Test Voltage:	DC 3.3V

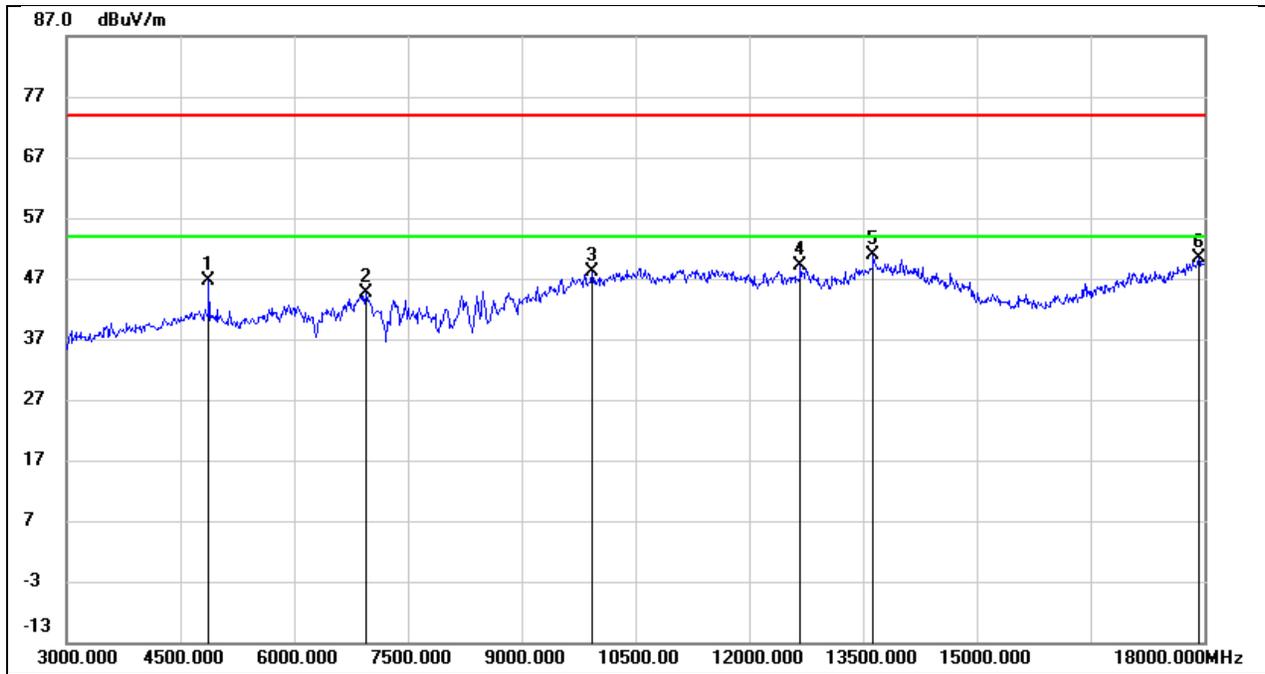


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	45.97	0.75	46.72	74.00	-27.28	peak
2	6945.000	38.25	6.31	44.56	74.00	-29.44	peak
3	9930.000	34.91	13.21	48.12	74.00	-25.88	peak
4	12675.000	29.35	19.83	49.18	74.00	-24.82	peak
5	13635.000	27.92	23.05	50.97	74.00	-23.03	peak
6	17925.000	22.46	27.87	50.33	74.00	-23.67	peak

Test Mode:	BLE 500K	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	DC 3.3V

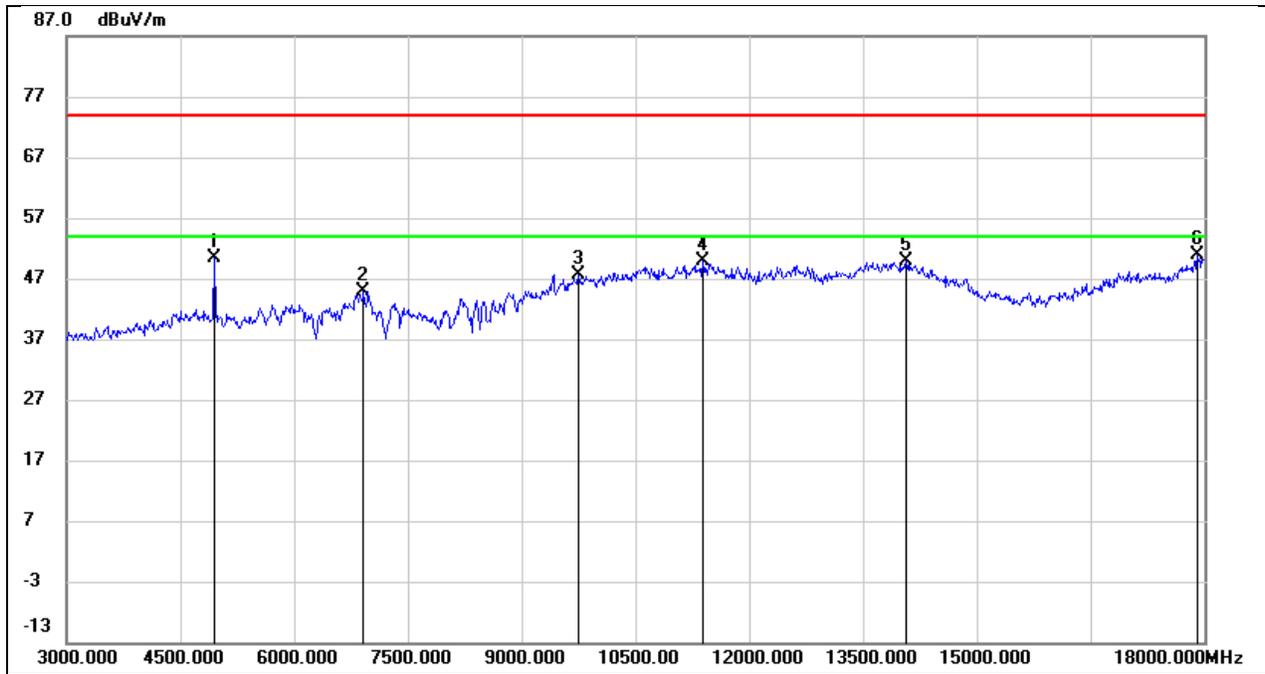

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	49.37	0.93	50.30	74.00	-23.70	peak
2	6915.000	38.57	6.24	44.81	74.00	-29.19	peak
3	9750.000	34.62	13.03	47.65	74.00	-26.35	peak
4	11385.000	32.54	17.43	49.97	74.00	-24.03	peak
5	14070.000	25.99	23.89	49.88	74.00	-24.12	peak
6	17910.000	23.09	27.75	50.84	74.00	-23.16	peak


Test Mode:	BLE 500K	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	DC 3.3V

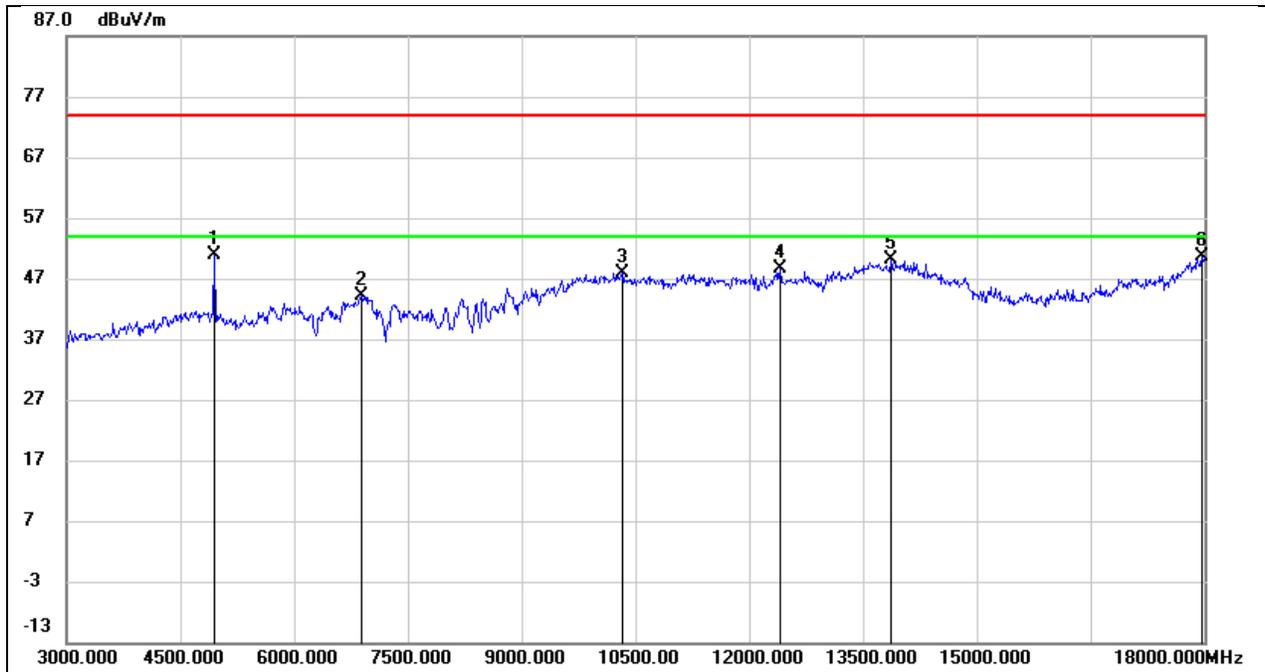

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	49.98	0.93	50.91	74.00	-23.09	peak
2	6885.000	38.02	6.15	44.17	74.00	-29.83	peak
3	10335.000	34.29	13.71	48.00	74.00	-26.00	peak
4	12405.000	29.05	19.64	48.69	74.00	-25.31	peak
5	13875.000	26.61	23.59	50.20	74.00	-23.80	peak
6	17970.000	22.34	28.27	50.61	74.00	-23.39	peak


### 8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Loop antenna Face on EUT	Test Voltage:	DC 3.3V

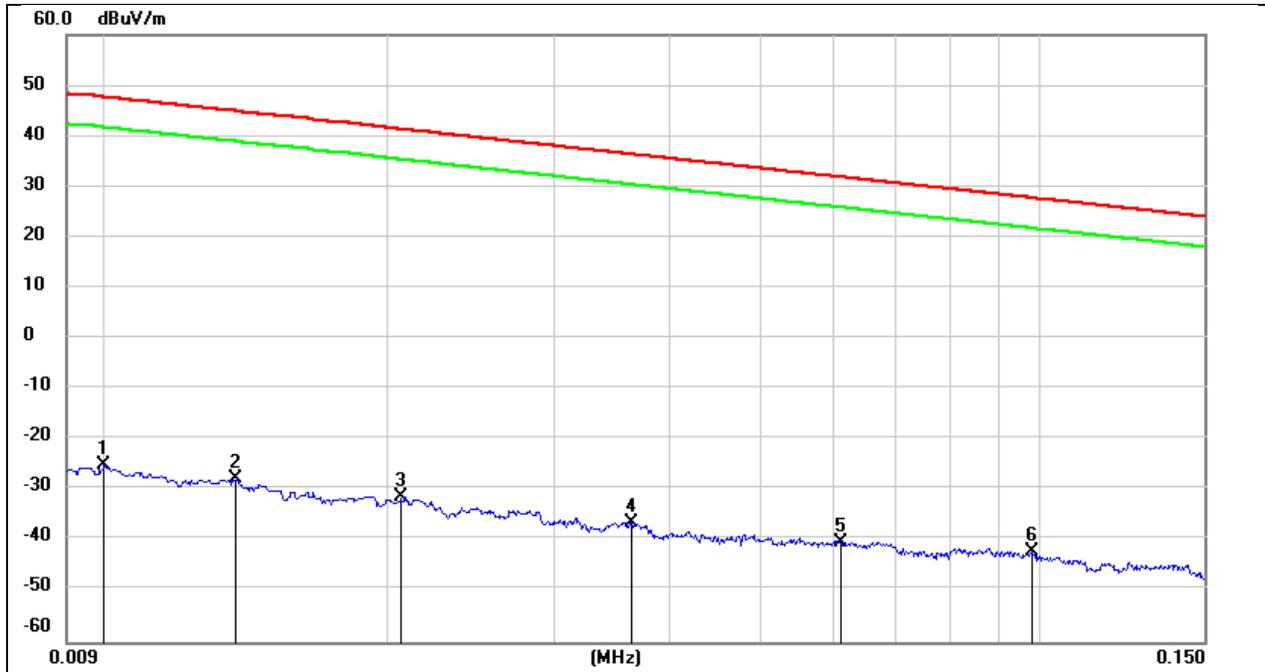


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	76.22	-101.40	-25.18	47.60	-76.68	-3.90	-72.78	peak
2	0.0137	73.72	-101.38	-27.66	44.87	-79.16	-6.63	-72.53	peak
3	0.0206	69.92	-101.35	-31.43	41.32	-82.93	-10.18	-72.75	peak
4	0.0364	64.88	-101.42	-36.54	36.38	-88.04	-15.12	-72.92	peak
5	0.0611	61.28	-101.53	-40.25	31.88	-91.75	-19.62	-72.13	peak
6	0.0981	59.77	-101.78	-42.01	27.77	-93.51	-23.73	-69.78	peak

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Loop antenna Face on EUT	Test Voltage:	DC 3.3V

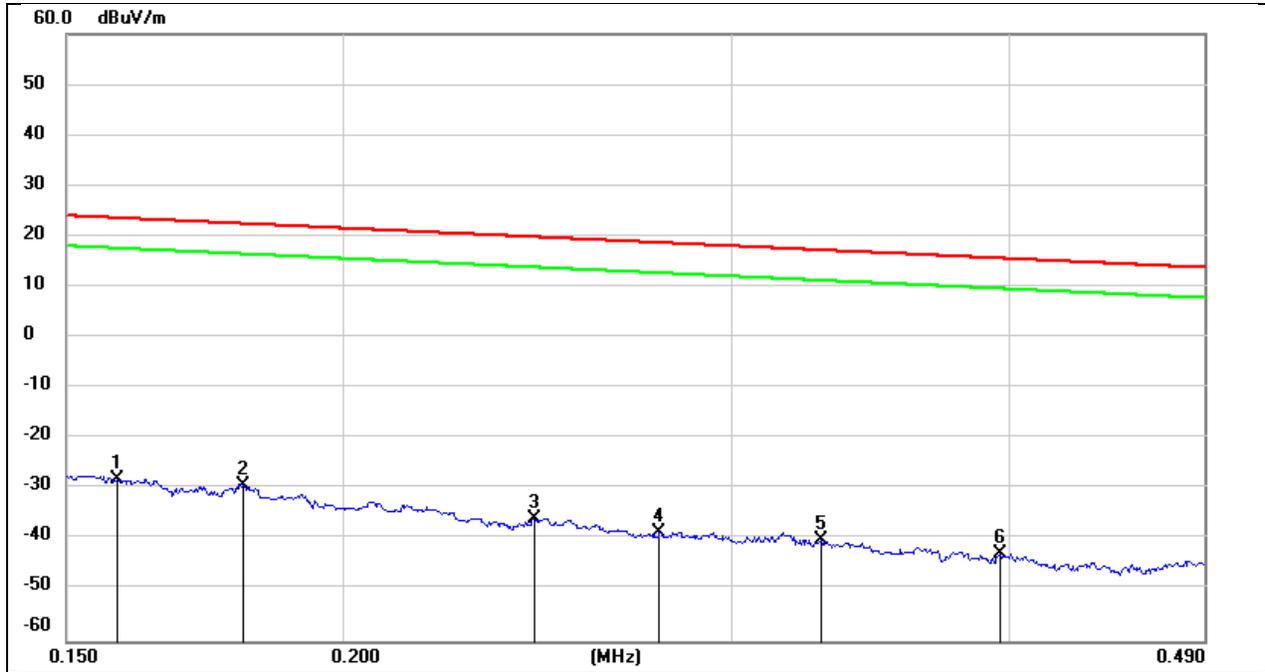

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1582	73.55	-101.65	-28.10	23.62	-79.60	-27.88	-51.72	peak
2	0.1801	72.53	-101.68	-29.15	22.50	-80.65	-29.00	-51.65	peak
3	0.2442	66.03	-101.79	-35.76	19.85	-87.26	-31.65	-55.61	peak
4	0.2782	63.29	-101.83	-38.54	18.71	-90.04	-32.79	-57.25	peak
5	0.3286	61.71	-101.88	-40.17	17.27	-91.67	-34.23	-57.44	peak
6	0.3966	59.18	-101.96	-42.78	15.63	-94.28	-35.87	-58.41	peak


Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Loop antenna Face on EUT	Test Voltage:	DC 3.3V

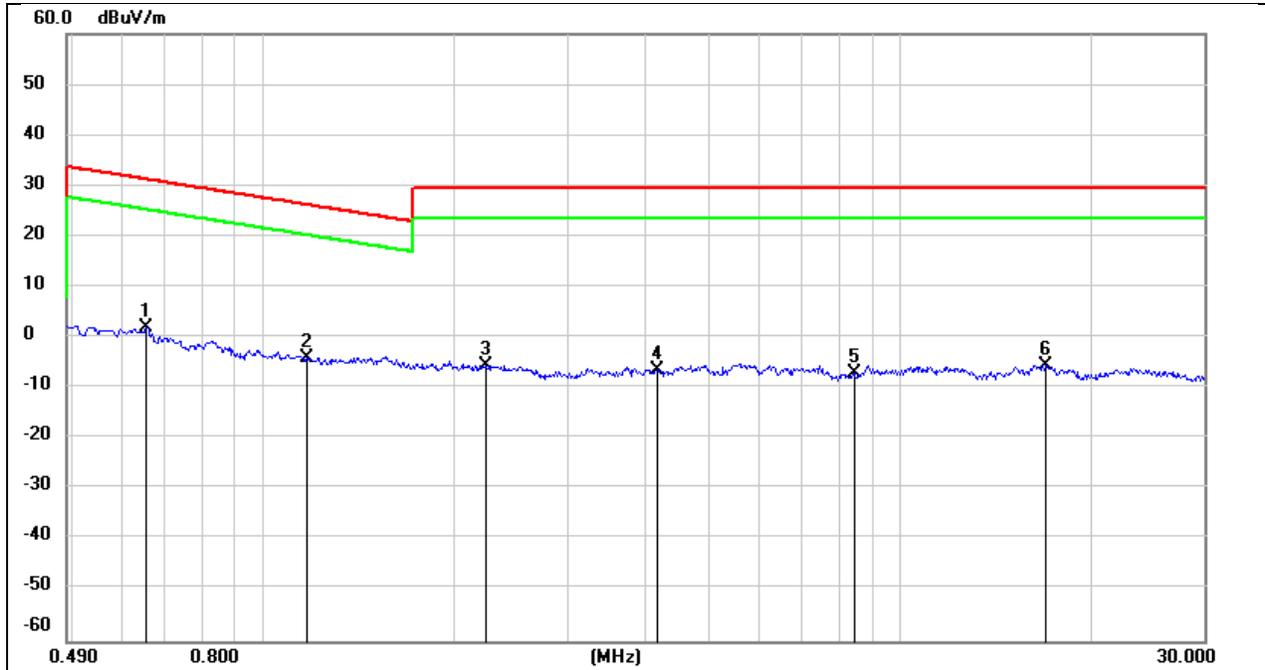

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.6561	63.93	-62.10	1.83	31.26	-49.67	-20.24	-29.43	peak
2	1.1687	58.22	-62.19	-3.97	26.25	-55.47	-25.25	-30.22	peak
3	2.2364	56.30	-61.76	-5.46	29.54	-56.96	-21.96	-35.00	peak
4	4.1492	55.00	-61.36	-6.36	29.54	-57.86	-21.96	-35.90	peak
5	8.4577	53.92	-61.01	-7.09	29.54	-58.59	-21.96	-36.63	peak
6	16.9566	55.37	-60.94	-5.57	29.54	-57.07	-21.96	-35.11	peak


### 8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.3V

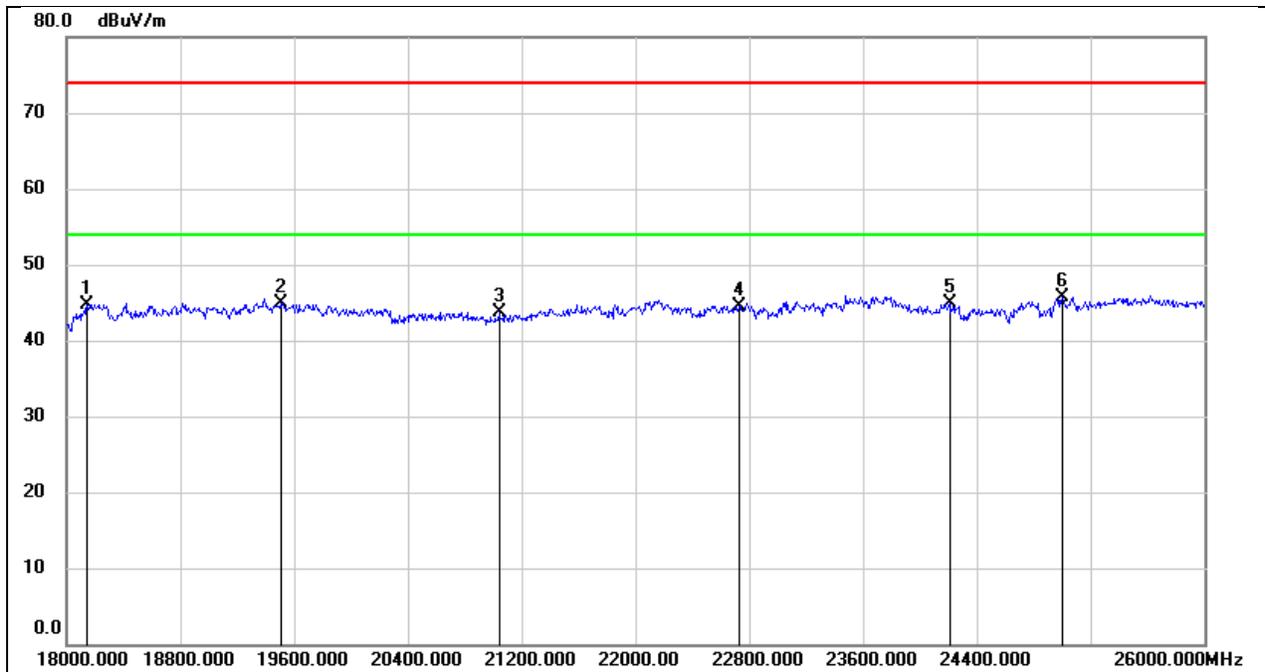

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18144.000	50.27	-5.48	44.79	74.00	-29.21	peak
2	19504.000	50.47	-5.54	44.93	74.00	-29.07	peak
3	21040.000	48.55	-4.86	43.69	74.00	-30.31	peak
4	22728.000	48.27	-3.71	44.56	74.00	-29.44	peak
5	24208.000	47.71	-2.81	44.90	74.00	-29.10	peak
6	25000.000	47.86	-2.10	45.76	74.00	-28.24	peak


Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 3.3V

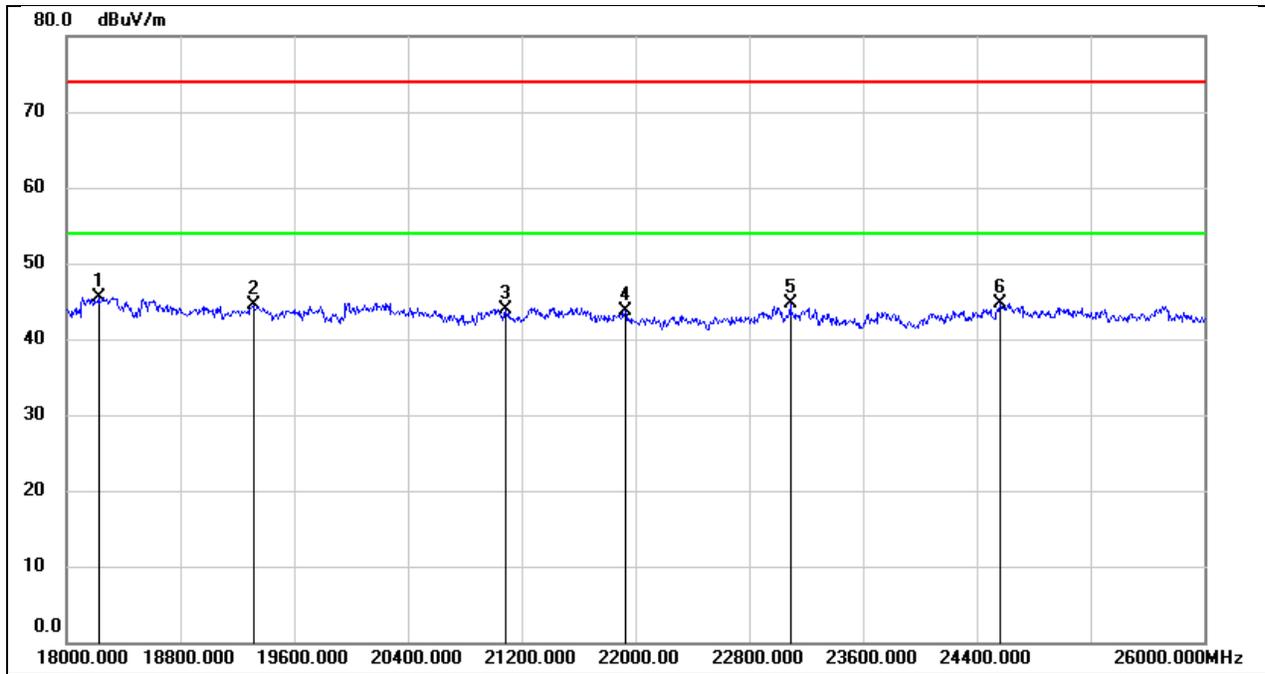

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18224.000	51.08	-5.53	45.55	74.00	-28.45	peak
2	19312.000	50.05	-5.57	44.48	74.00	-29.52	peak
3	21088.000	48.78	-4.84	43.94	74.00	-30.06	peak
4	21928.000	48.05	-4.43	43.62	74.00	-30.38	peak
5	23088.000	48.02	-3.41	44.61	74.00	-29.39	peak
6	24568.000	47.10	-2.33	44.77	74.00	-29.23	peak


### 8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.3V

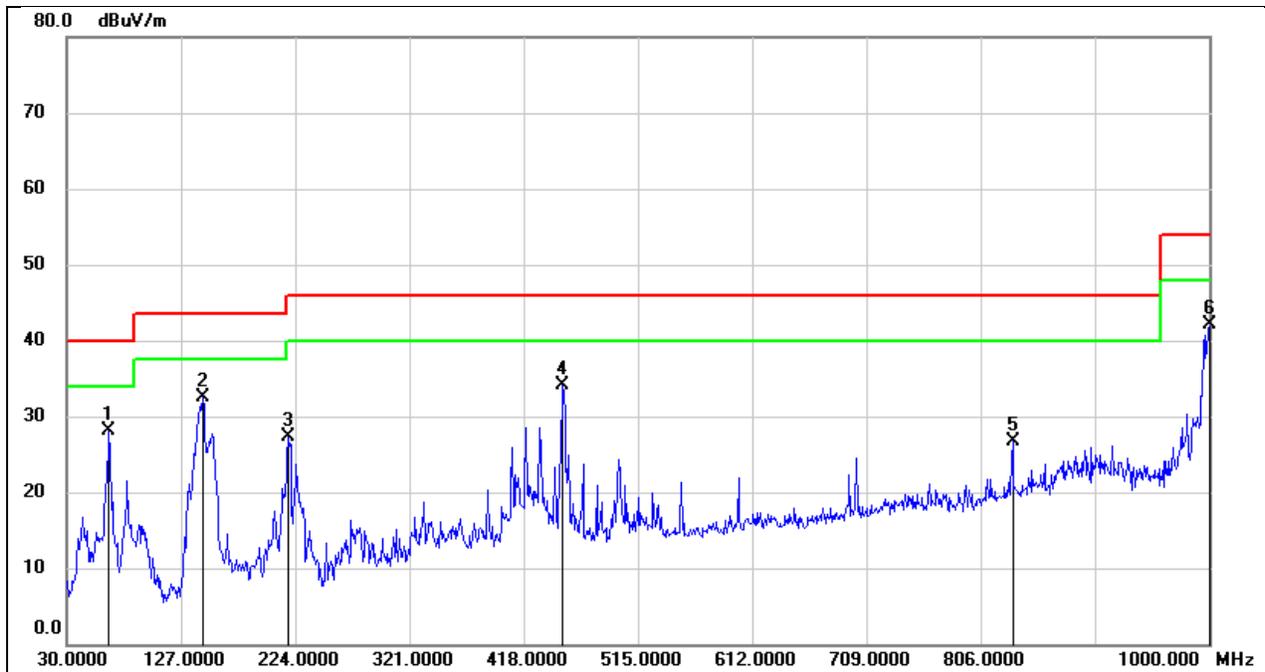

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	65.8900	43.66	-15.63	28.03	40.00	-11.97	QP
2	145.4299	46.96	-14.42	32.54	43.50	-10.96	QP
3	218.1800	41.35	-13.95	27.40	46.00	-18.60	QP
4	450.9800	43.54	-9.44	34.10	46.00	-11.90	QP
5	833.1599	30.19	-3.57	26.62	46.00	-19.38	QP
6	1000.0000	44.19	-2.10	42.09	54.00	-11.91	QP

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 3.3V

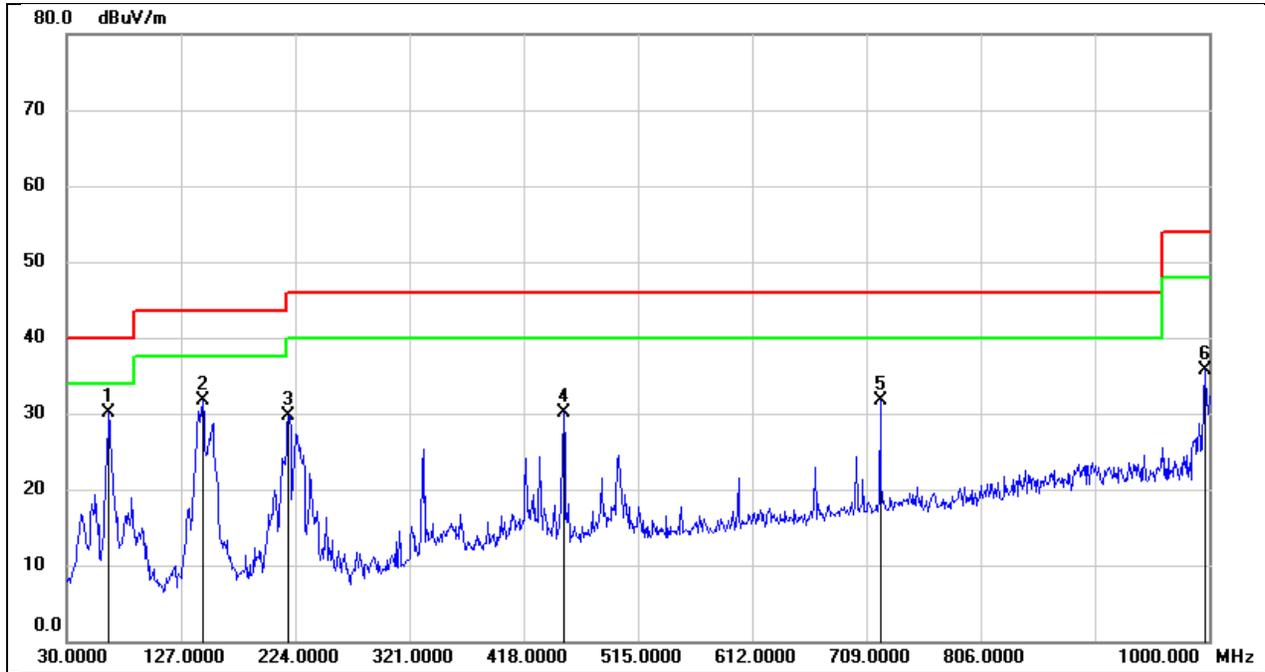

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	65.8900	45.79	-15.63	30.16	40.00	-9.84	QP
2	145.4299	46.05	-14.42	31.63	43.50	-11.87	QP
3	218.1800	43.74	-13.95	29.79	46.00	-16.21	QP
4	451.9500	39.58	-9.44	30.14	46.00	-15.86	QP
5	720.6400	37.25	-5.61	31.64	46.00	-14.36	QP
6	996.1200	37.93	-2.15	35.78	54.00	-18.22	QP

## 9. ANTENNA REQUIREMENT

### REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DESCRIPTION

Pass

## 10. AC POWER LINE CONDUCTED EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2020. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST SETUP

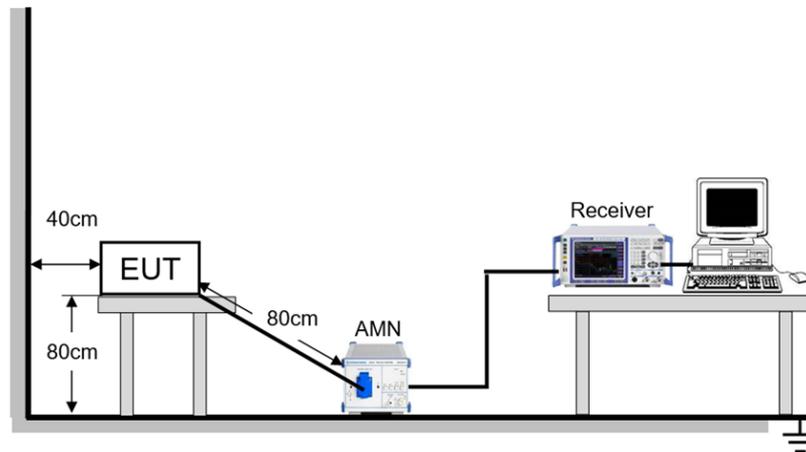

**TEST ENVIRONMENT**


Temperature	22.4°C	Relative Humidity	56.8%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

**TEST DATE / ENGINEER**

Test Date	August 27, 2025	Test By	Deacon Tan
-----------	-----------------	---------	------------

**TEST RESULTS**

Test Mode:	BLE 1M	Frequency(MHz):	2402
Line:	Line		

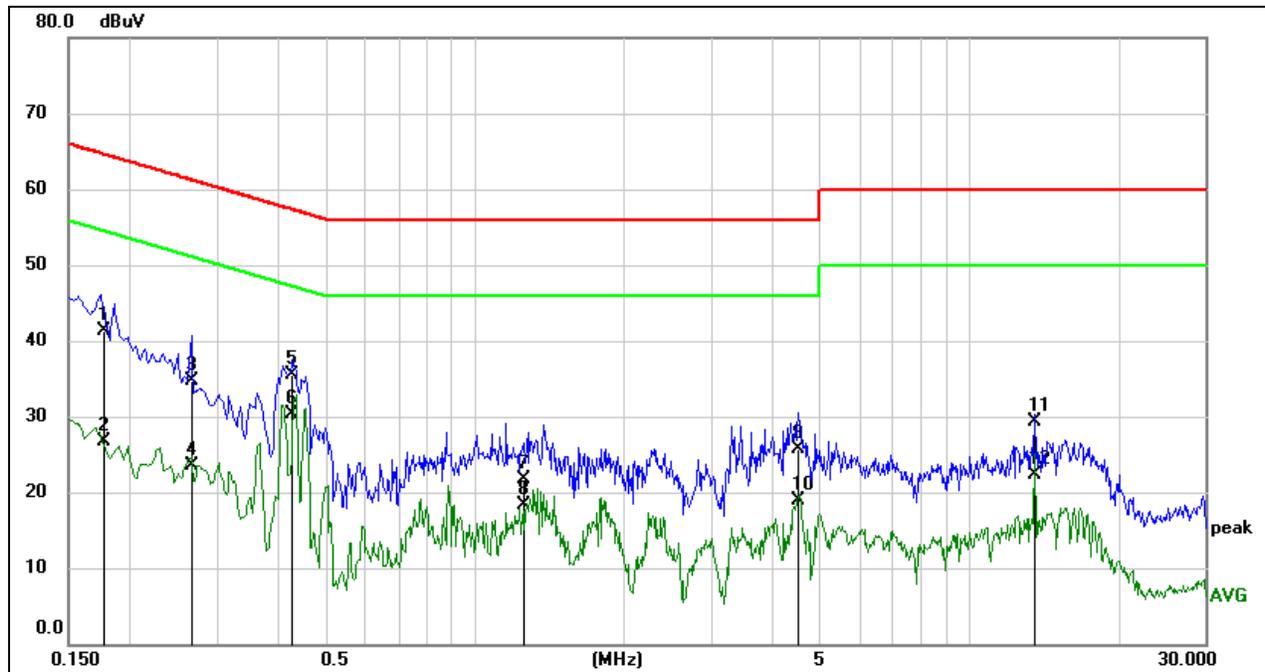


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1779	31.68	9.68	41.36	64.58	-23.22	QP
2	0.1779	17.00	9.68	26.68	54.58	-27.90	AVG
3	0.2669	24.98	9.64	34.62	61.21	-26.59	QP
4	0.2669	13.82	9.64	23.46	51.21	-27.75	AVG
5	0.4278	25.92	9.64	35.56	57.30	-21.74	QP
6	0.4278	20.67	9.64	30.31	47.30	-16.99	AVG
7	1.2498	12.05	9.65	21.70	56.00	-34.30	QP
8	1.2498	8.62	9.65	18.27	46.00	-27.73	AVG
9	4.5139	15.89	9.73	25.62	56.00	-30.38	QP
10	4.5139	9.08	9.73	18.81	46.00	-27.19	AVG
11	13.5599	19.64	9.74	29.38	60.00	-30.62	QP
12	13.5599	12.50	9.74	22.24	50.00	-27.76	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	BLE 1M	Frequency(MHz):	2402
Line:	Neutral		

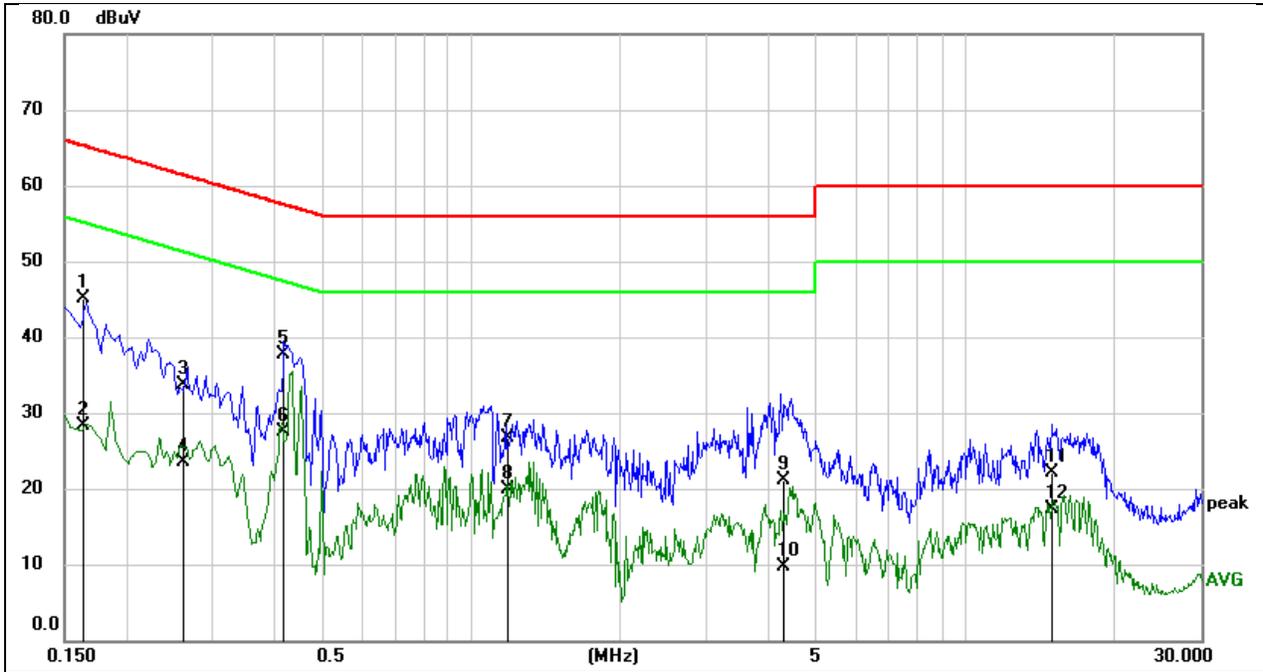

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1629	35.53	9.64	45.17	65.31	-20.14	QP
2	0.1629	18.59	9.64	28.23	55.31	-27.08	AVG
3	0.2614	24.10	9.64	33.74	61.39	-27.65	QP
4	0.2614	13.77	9.64	23.41	51.39	-27.98	AVG
5	0.4171	28.01	9.64	37.65	57.51	-19.86	QP
6	0.4171	17.78	9.64	27.42	47.51	-20.09	AVG
7	1.1858	17.05	9.63	26.68	56.00	-29.32	QP
8	1.1858	10.30	9.63	19.93	46.00	-26.07	AVG
9	4.2623	11.47	9.64	21.11	56.00	-34.89	QP
10	4.2623	0.11	9.64	9.75	46.00	-36.25	AVG
11	14.9767	12.37	9.74	22.11	60.00	-37.89	QP
12	14.9767	7.52	9.74	17.26	50.00	-32.74	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.


## 11. TEST DATA


### 11.1. APPENDIX A: DTS BANDWIDTH

#### 11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.668	2401.656	2402.324	≥0.5	PASS
		2440	0.656	2439.660	2440.316	≥0.5	PASS
		2480	0.644	2479.668	2480.312	≥0.5	PASS
BLE_2M	Ant1	2402	1.388	2401.296	2402.684	≥0.5	PASS
		2440	1.400	2439.288	2440.688	≥0.5	PASS
		2480	1.400	2479.292	2480.692	≥0.5	PASS
BLE_125K	Ant1	2402	0.664	2401.656	2402.320	≥0.5	PASS
		2440	0.604	2439.688	2440.292	≥0.5	PASS
		2480	0.596	2479.692	2480.288	≥0.5	PASS
BLE_500K	Ant1	2402	0.644	2401.672	2402.316	≥0.5	PASS
		2440	0.644	2439.680	2440.324	≥0.5	PASS
		2480	0.668	2479.664	2480.332	≥0.5	PASS

### 11.1.2. Test Graphs

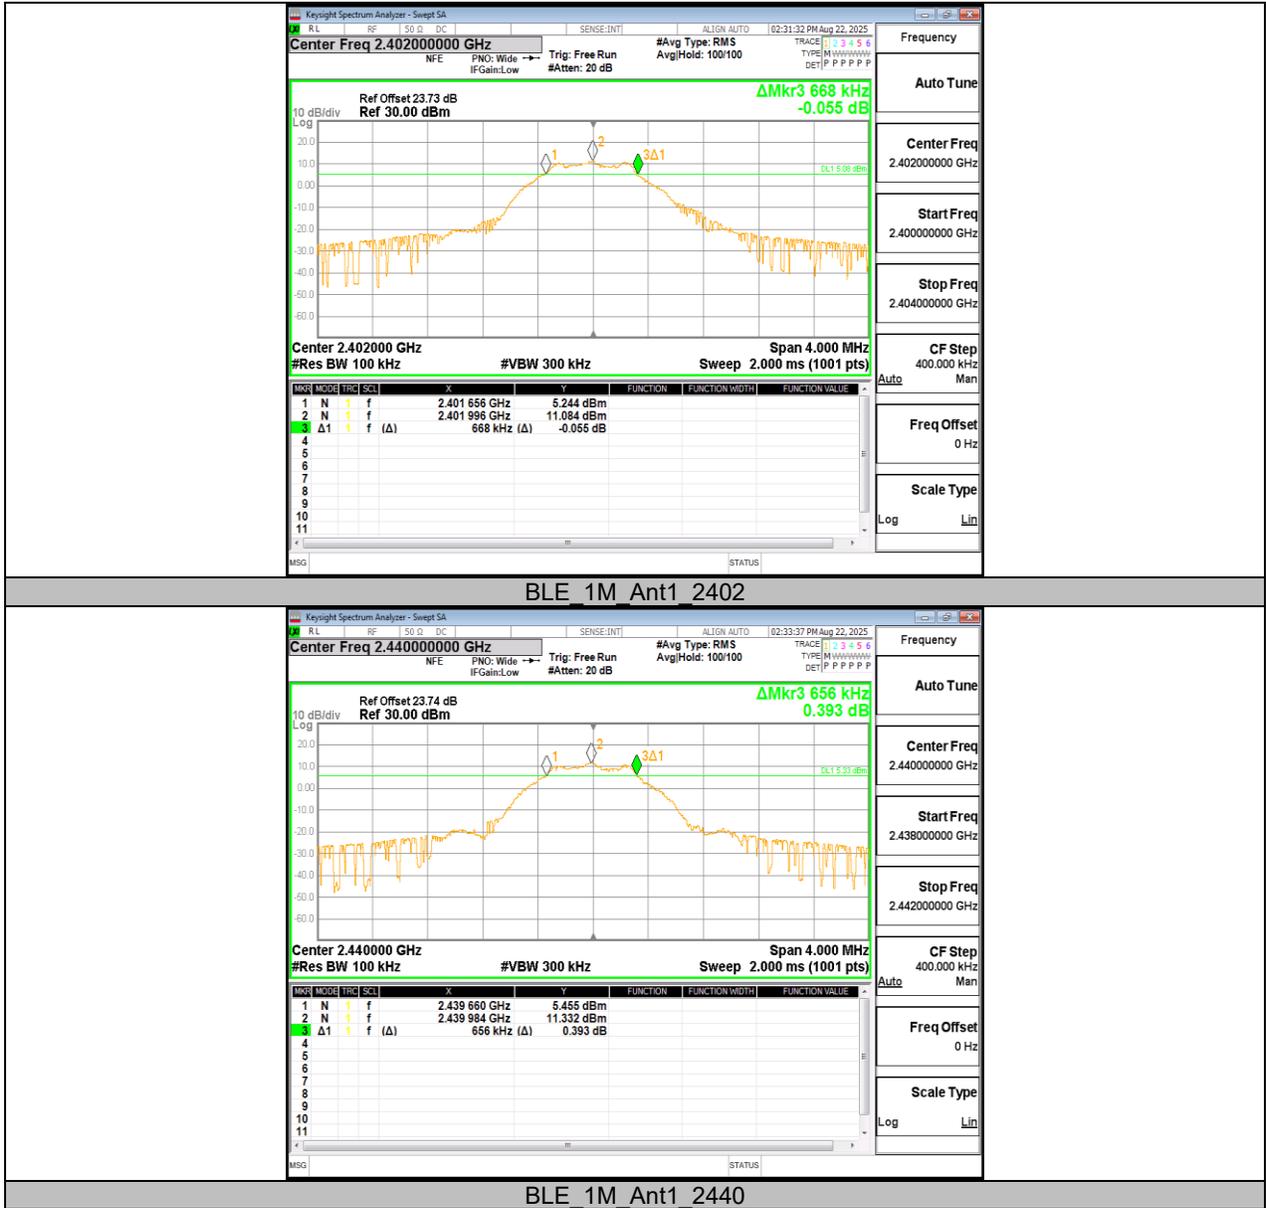


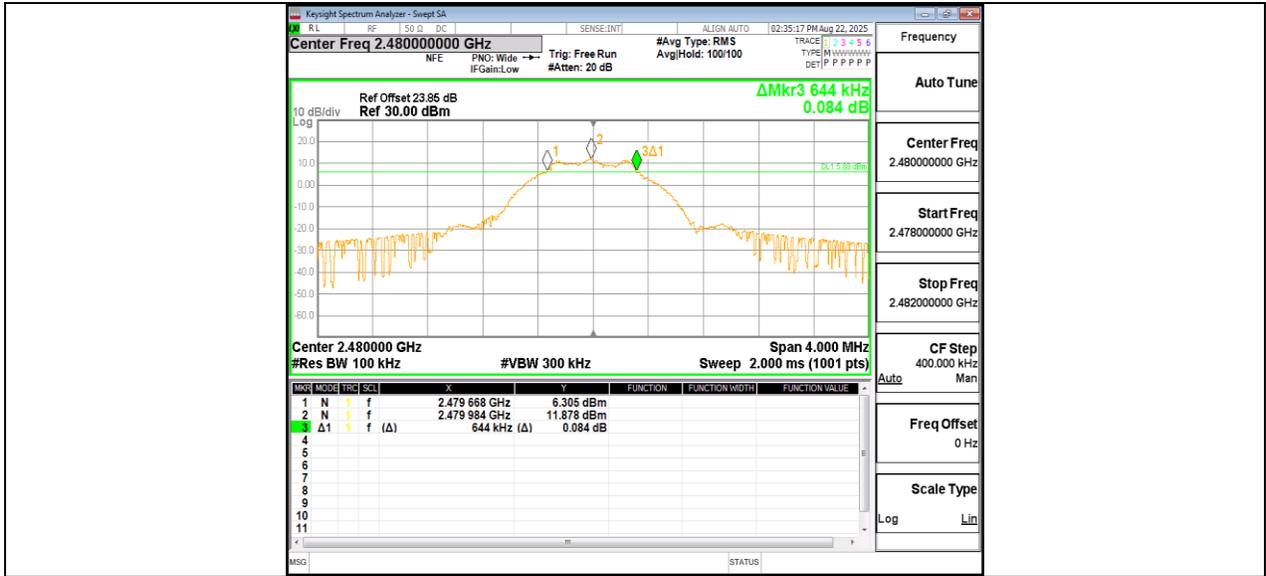

BLE 1M Ant1 2480



BLE 2M Ant1 2402

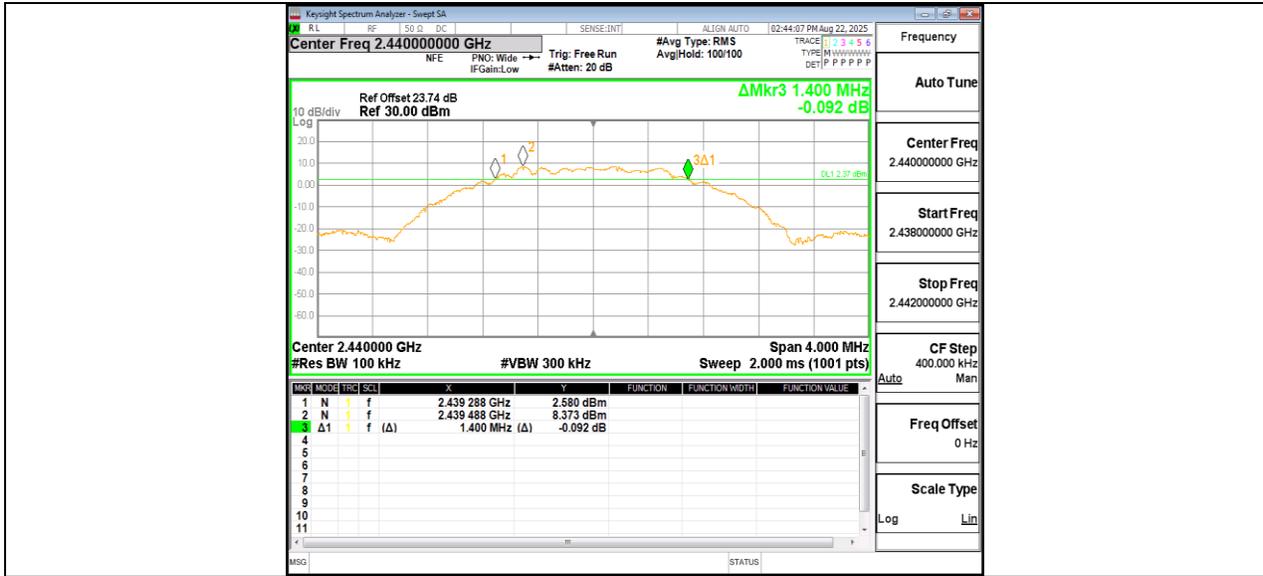

BLE\_2M\_Ant1\_2440




BLE\_2M\_Ant1\_2480



BLE\_125K\_Ant1\_2402




BLE\_125K\_Ant1\_2440

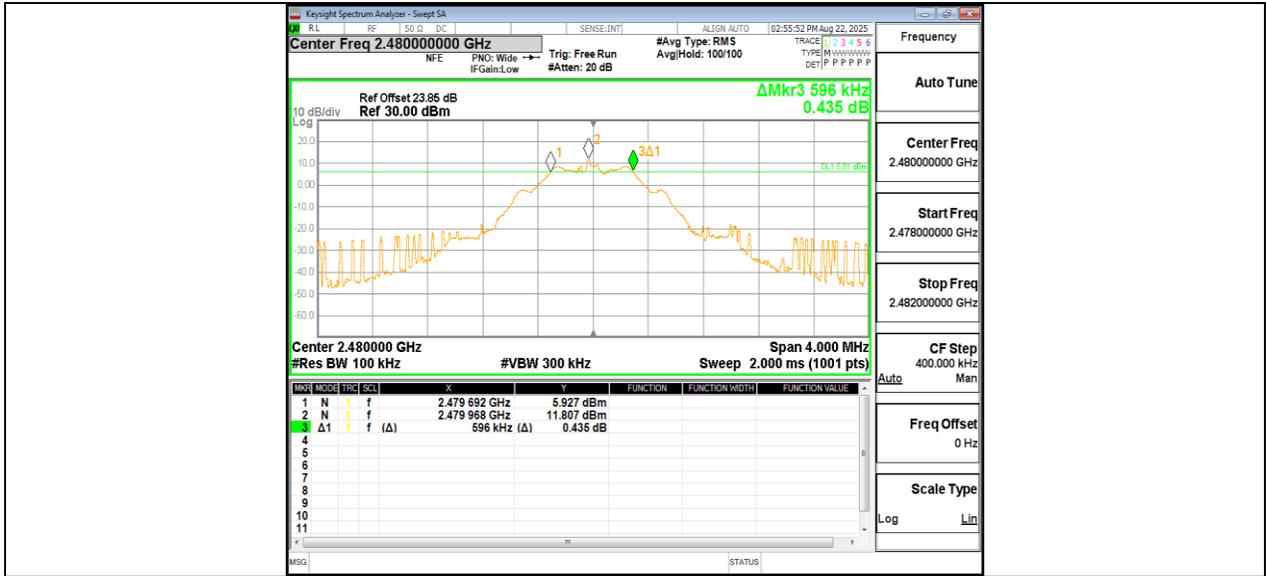

BLE 125K Ant1 2480



BLE 500K Ant1 2402

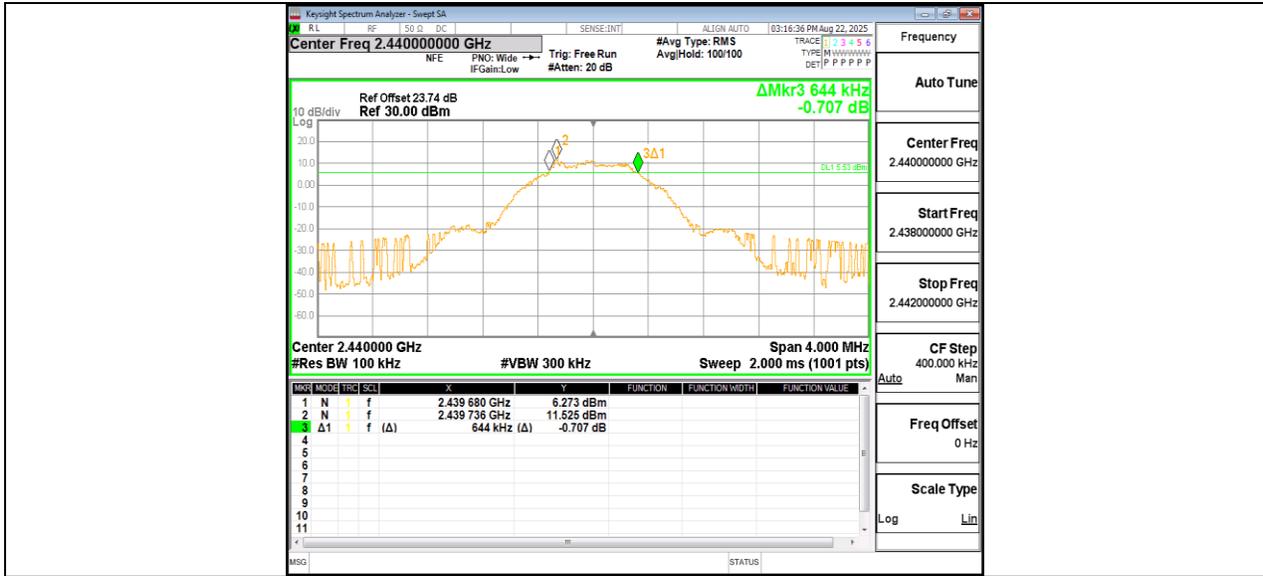

BLE 500K Ant1 2440





BLE 500K Ant1 2480

**11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH**  
**11.2.1. Test Result**


Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
BLE_1M	Ant1	2402	1.0357	2401.4810	2402.5167	PASS
		2440	1.0435	2439.4756	2440.5191	PASS
		2480	1.0471	2479.4731	2480.5202	PASS
BLE_2M	Ant1	2402	2.0915	2400.9554	2403.0469	PASS
		2440	2.1032	2438.9537	2441.0569	PASS
		2480	2.1202	2478.9397	2481.0599	PASS
BLE_125K	Ant1	2402	1.0676	2401.4606	2402.5282	PASS
		2440	1.0606	2439.4615	2440.5221	PASS
		2480	1.0693	2479.4535	2480.5228	PASS
BLE_500K	Ant1	2402	1.0258	2401.4852	2402.5110	PASS
		2440	1.0292	2439.4785	2440.5077	PASS
		2480	1.0363	2479.4763	2480.5126	PASS

### 11.2.2. Test Graphs

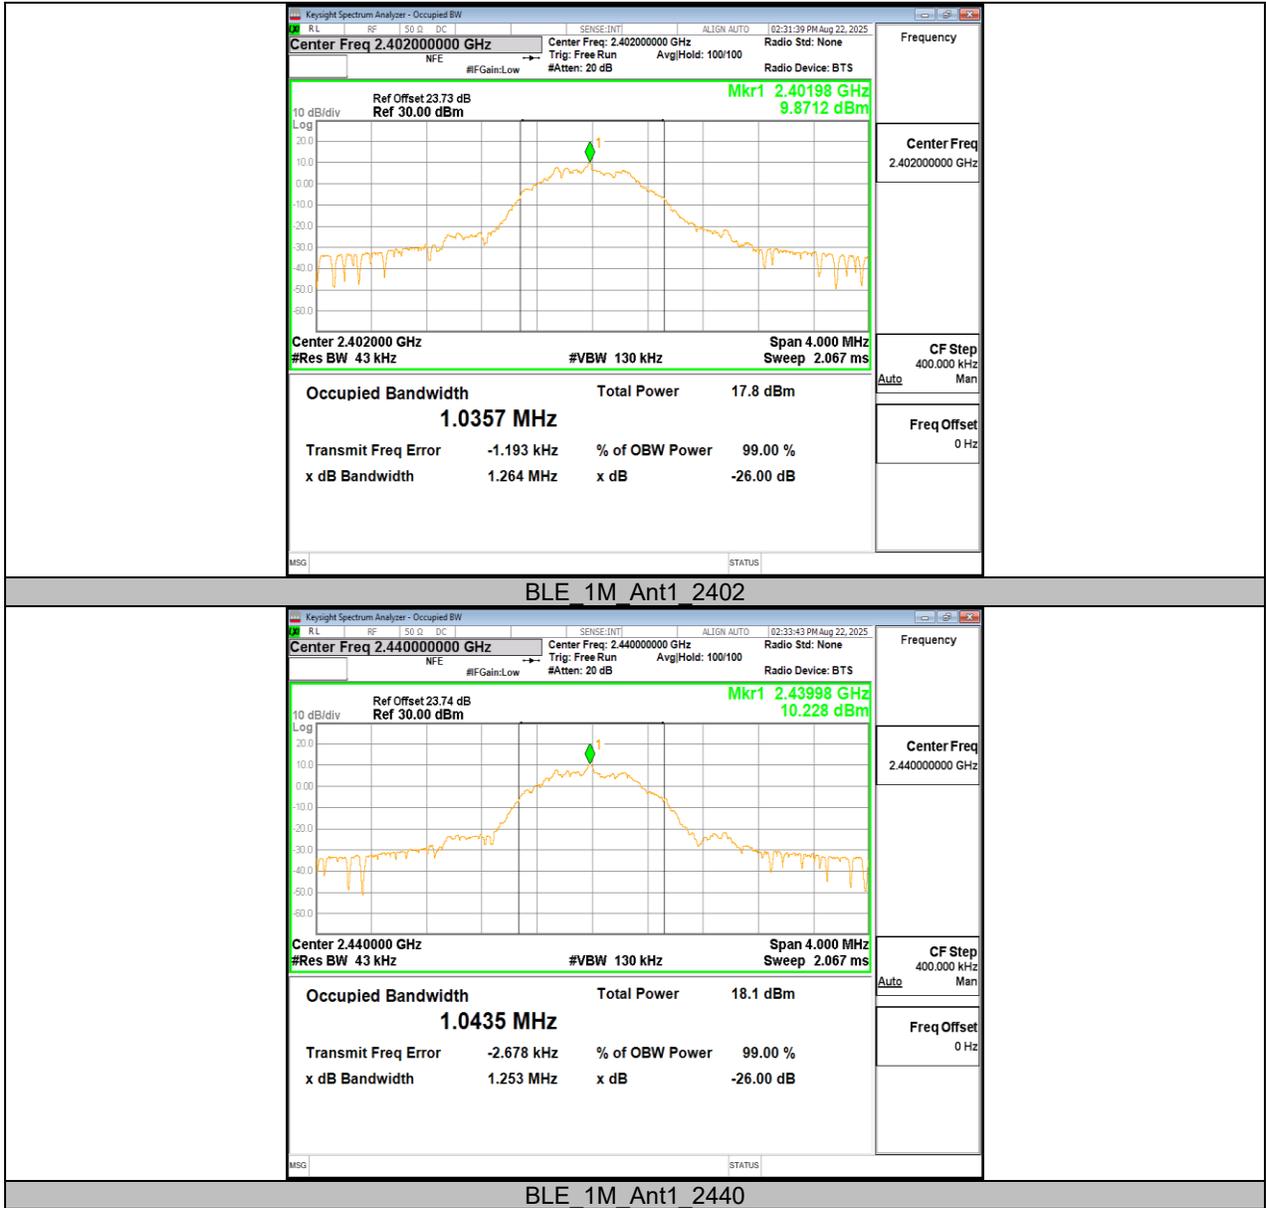


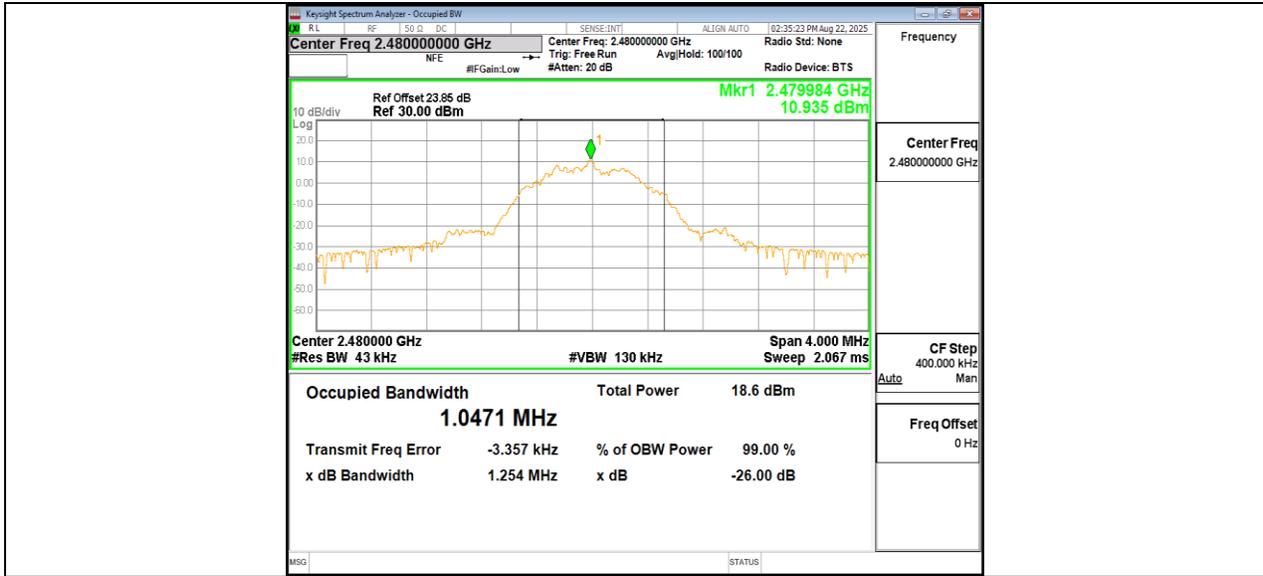


BLE 1M Ant1 2480

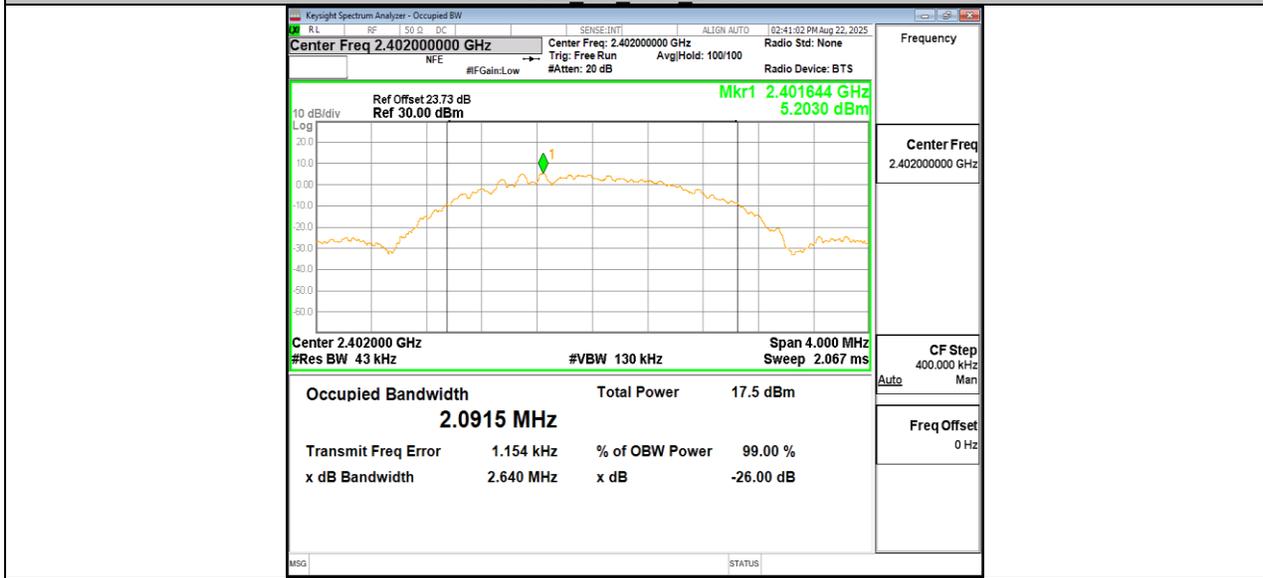


BLE 2M Ant1 2402

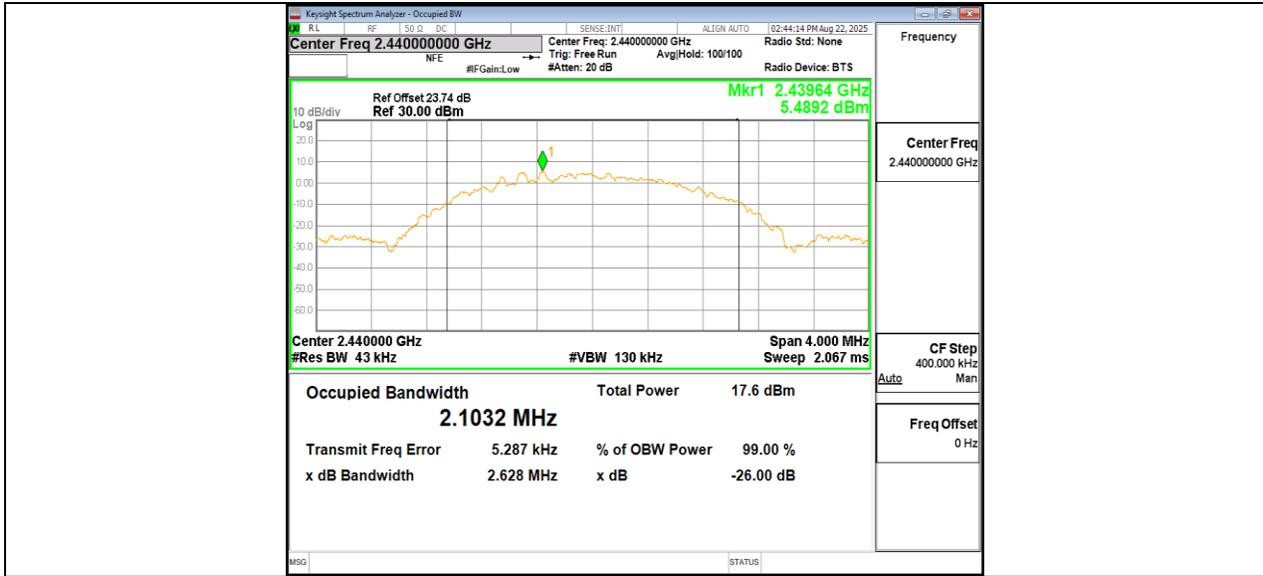


BLE\_2M\_Ant1\_2440

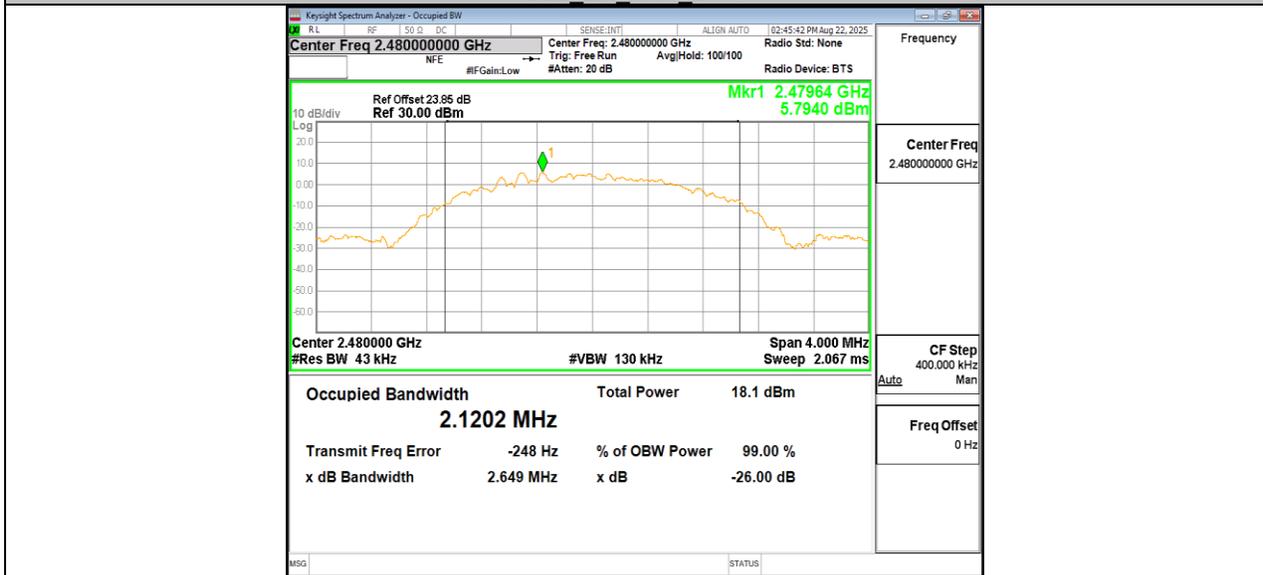


BLE\_2M\_Ant1\_2480

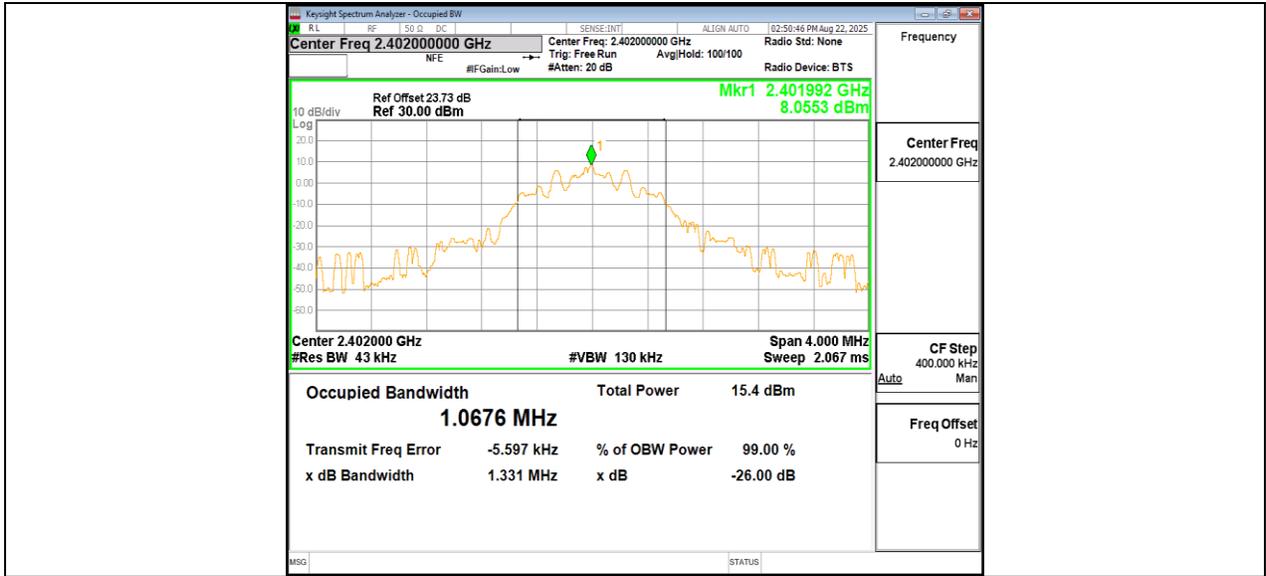


BLE 125K Ant1 2402

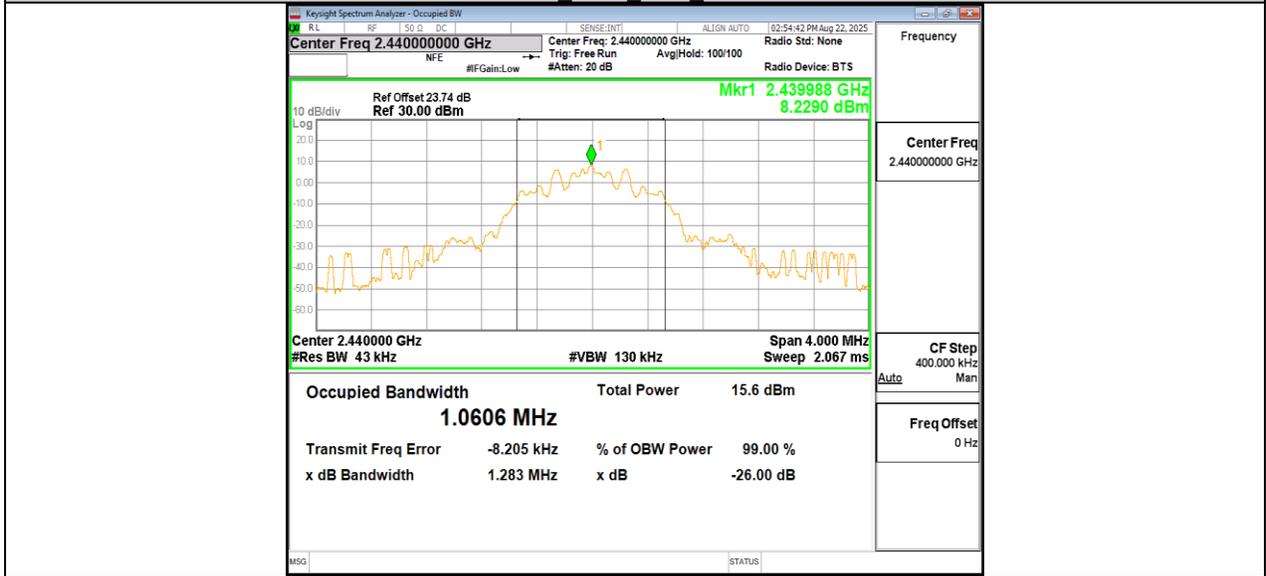


BLE 125K Ant1 2440

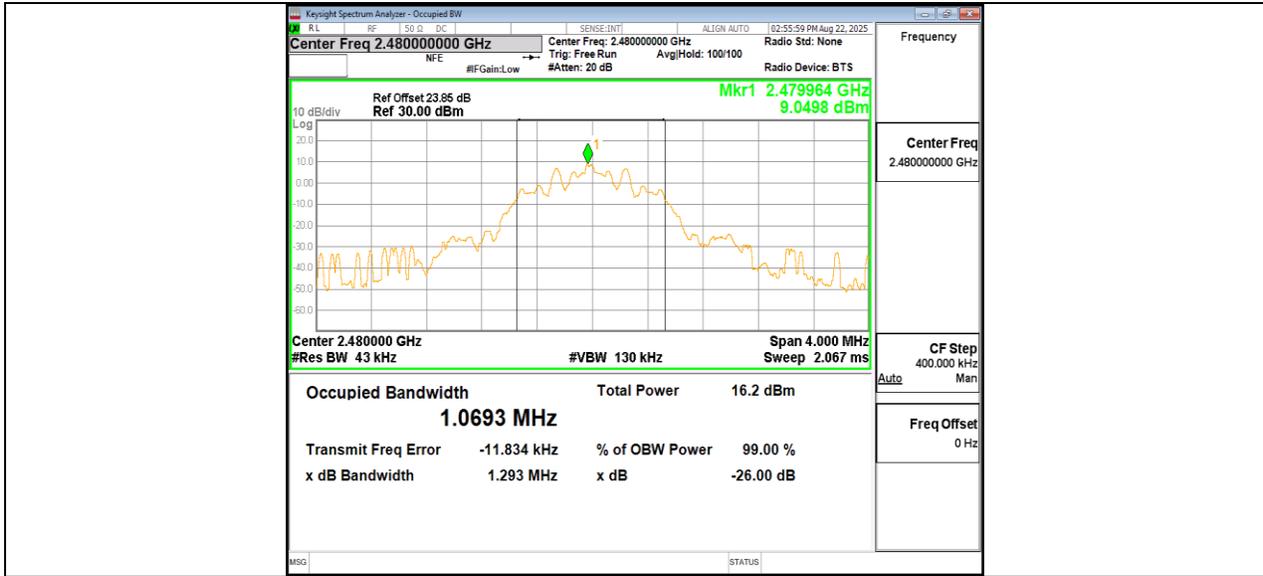


BLE 125K Ant1 2480

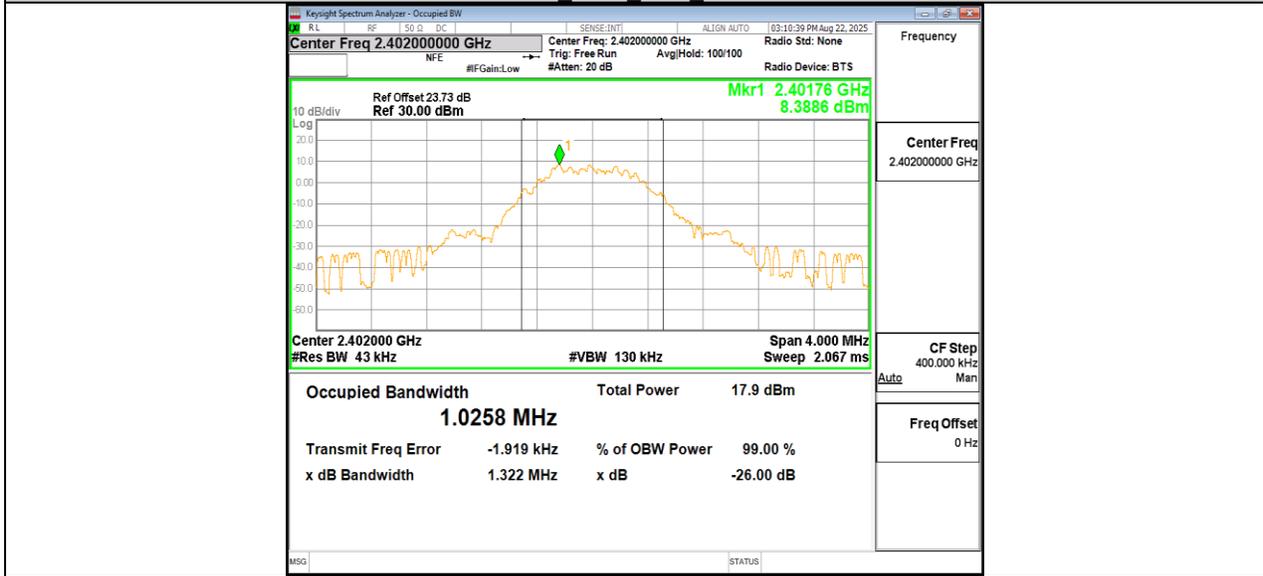

BLE 500K Ant1 2402

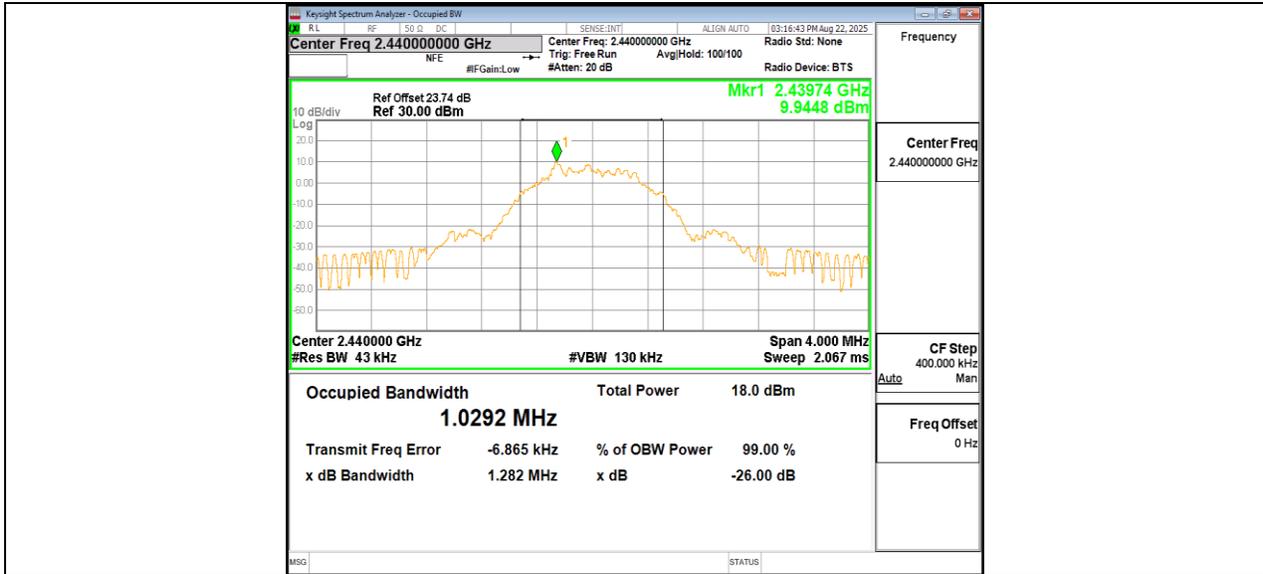

BLE 500K Ant1 2440

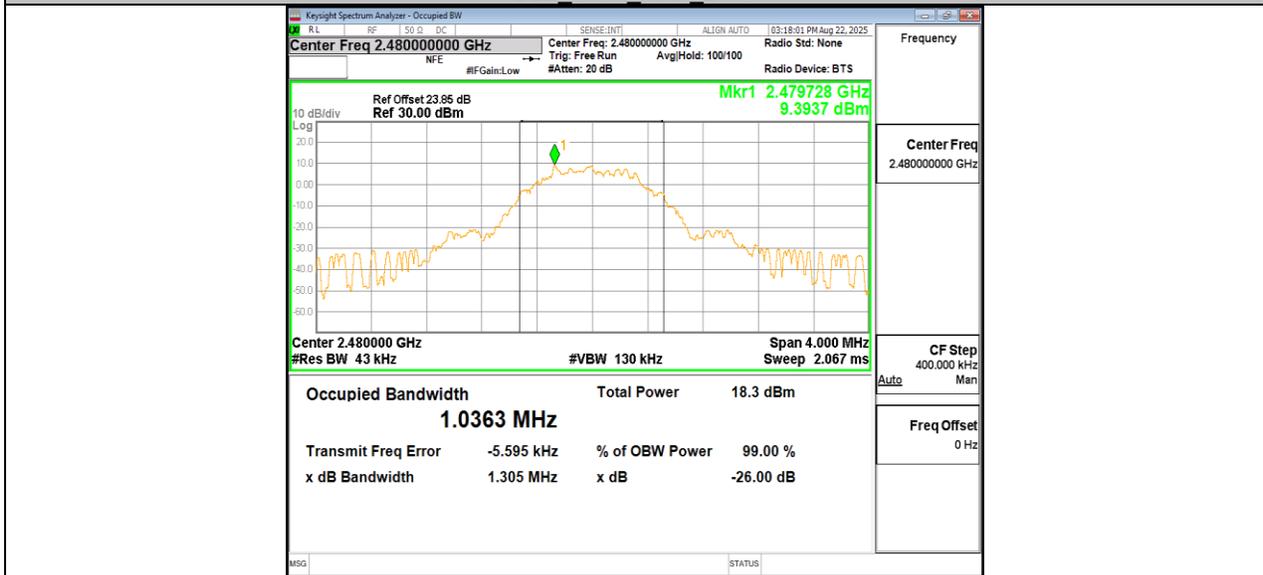

BLE 500K Ant1 2480

### 11.3. APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER


#### 11.3.1. Test Result


Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	11.50	≤30	PASS
		2440	11.65	≤30	PASS
		2480	12.09	≤30	PASS
BLE_2M	Ant1	2402	11.52	≤30	PASS
		2440	11.66	≤30	PASS
		2480	12.12	≤30	PASS
BLE_125K	Ant1	2402	11.51	≤30	PASS
		2440	11.66	≤30	PASS
		2480	12.11	≤30	PASS
BLE_500K	Ant1	2402	11.51	≤30	PASS
		2440	11.66	≤30	PASS
		2480	12.10	≤30	PASS

**11.4. APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY**  
**11.4.1. Test Result**


Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-3.00	≤8.00	PASS
		2440	-2.59	≤8.00	PASS
		2480	-2.53	≤8.00	PASS
BLE_2M	Ant1	2402	-10.53	≤8.00	PASS
		2440	-10.43	≤8.00	PASS
		2480	-10.07	≤8.00	PASS
BLE_125K	Ant1	2402	5.23	≤8.00	PASS
		2440	5.44	≤8.00	PASS
		2480	5.93	≤8.00	PASS
BLE_500K	Ant1	2402	5.00	≤8.00	PASS
		2440	5.18	≤8.00	PASS
		2480	5.69	≤8.00	PASS

**11.4.2. Test Graphs**

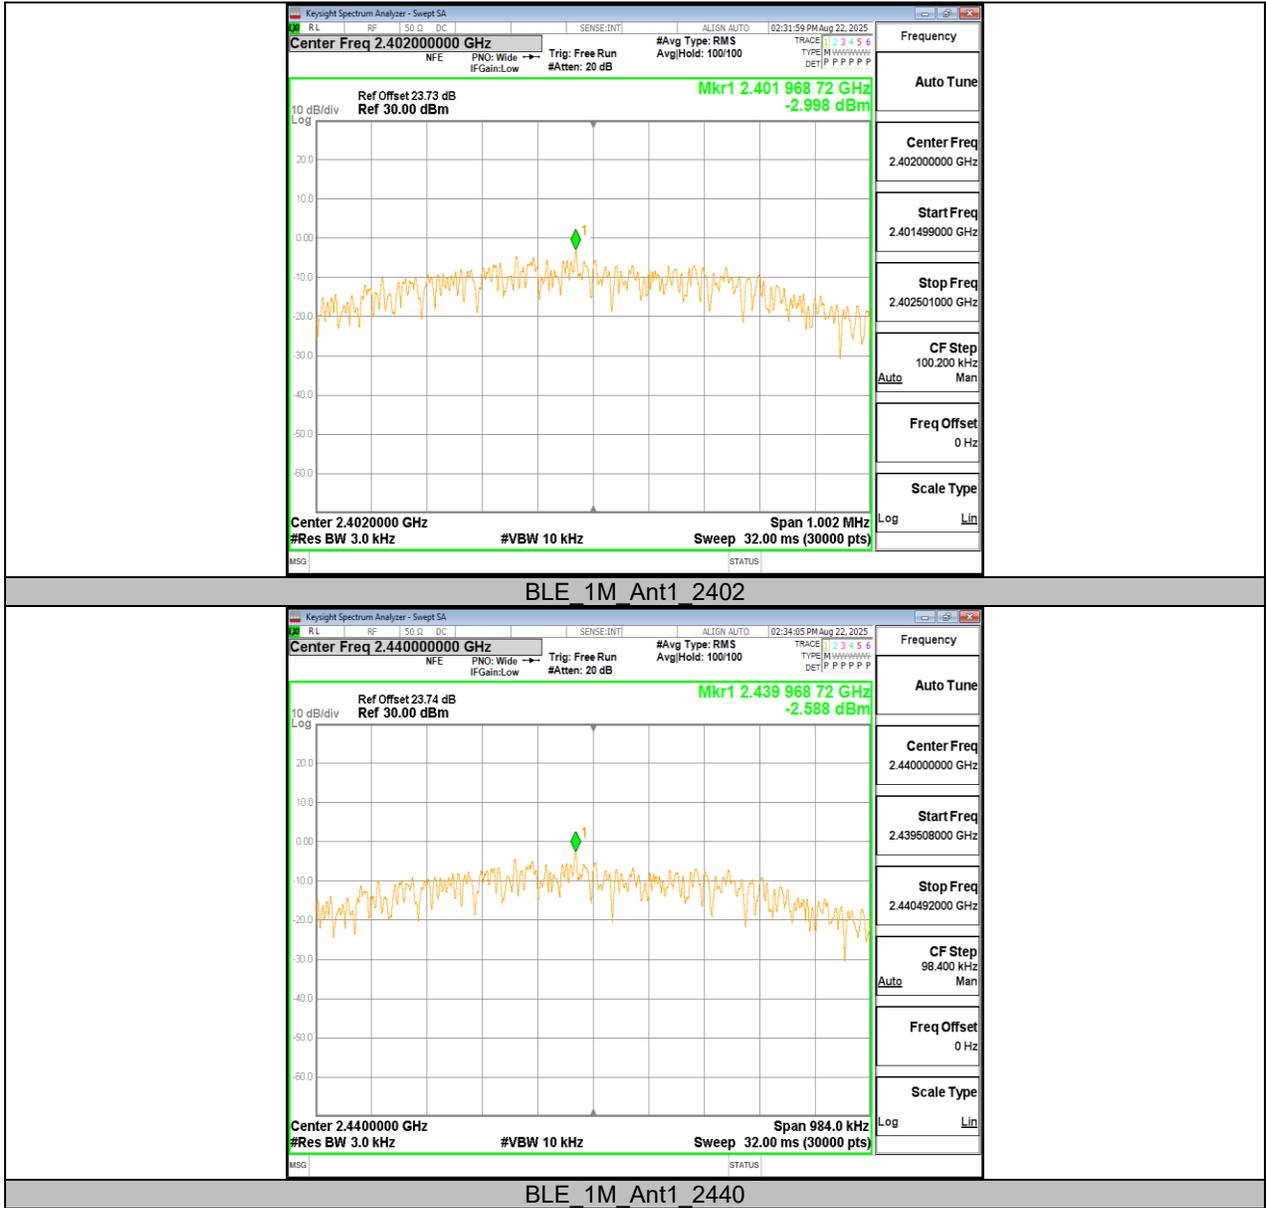


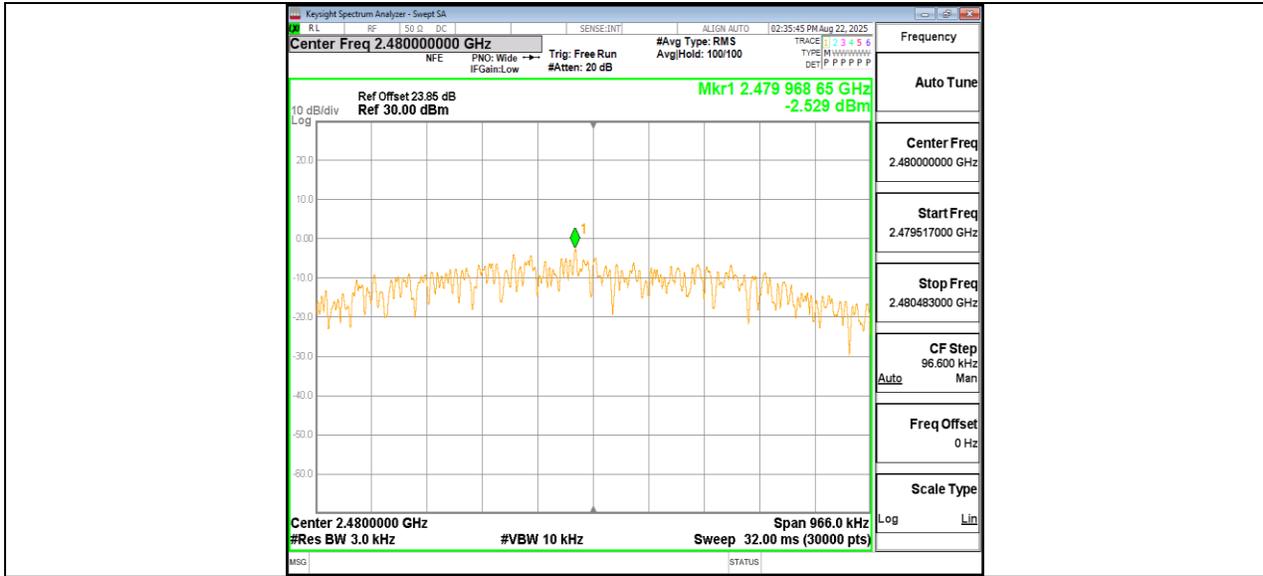


BLE\_1M\_Ant1\_2480

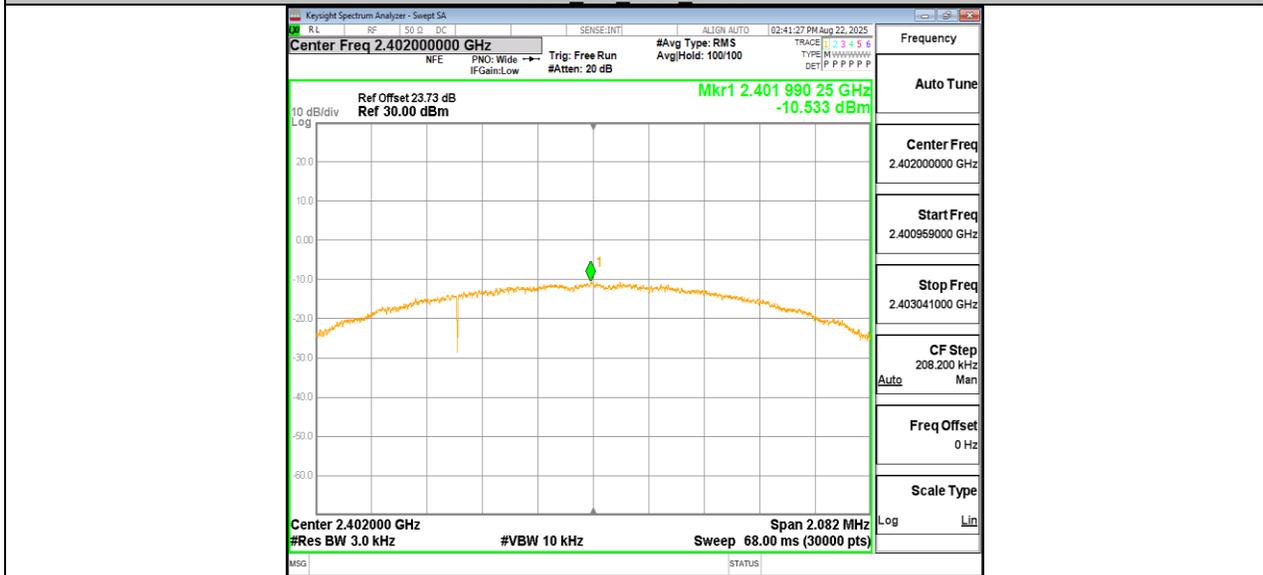


BLE\_2M\_Ant1\_2402

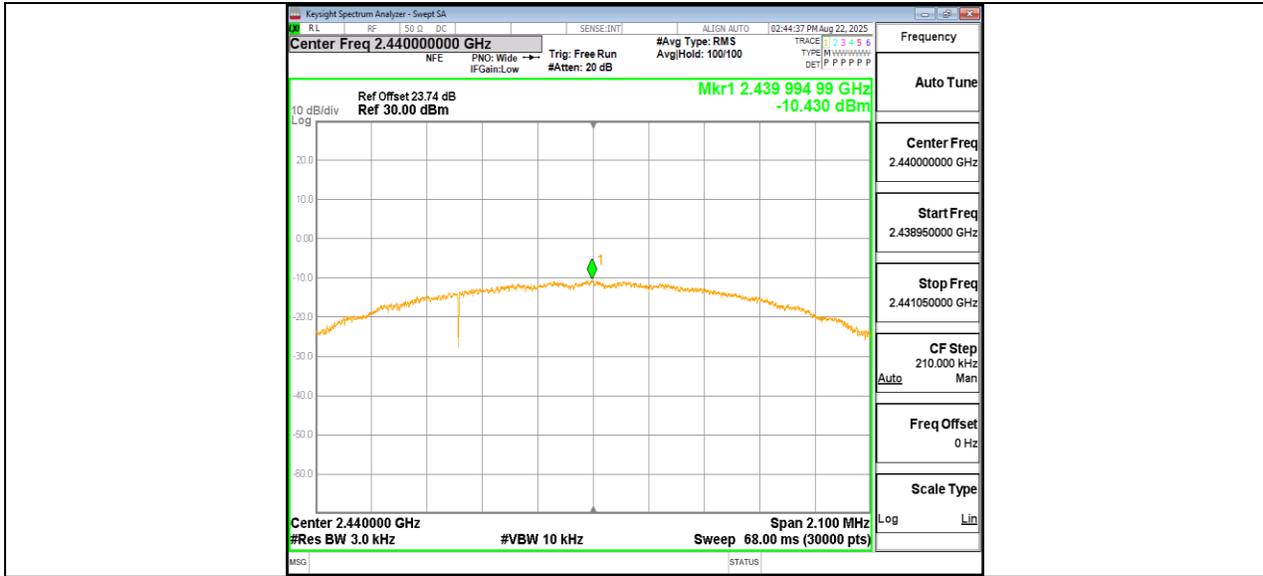


BLE\_2M\_Ant1\_2440

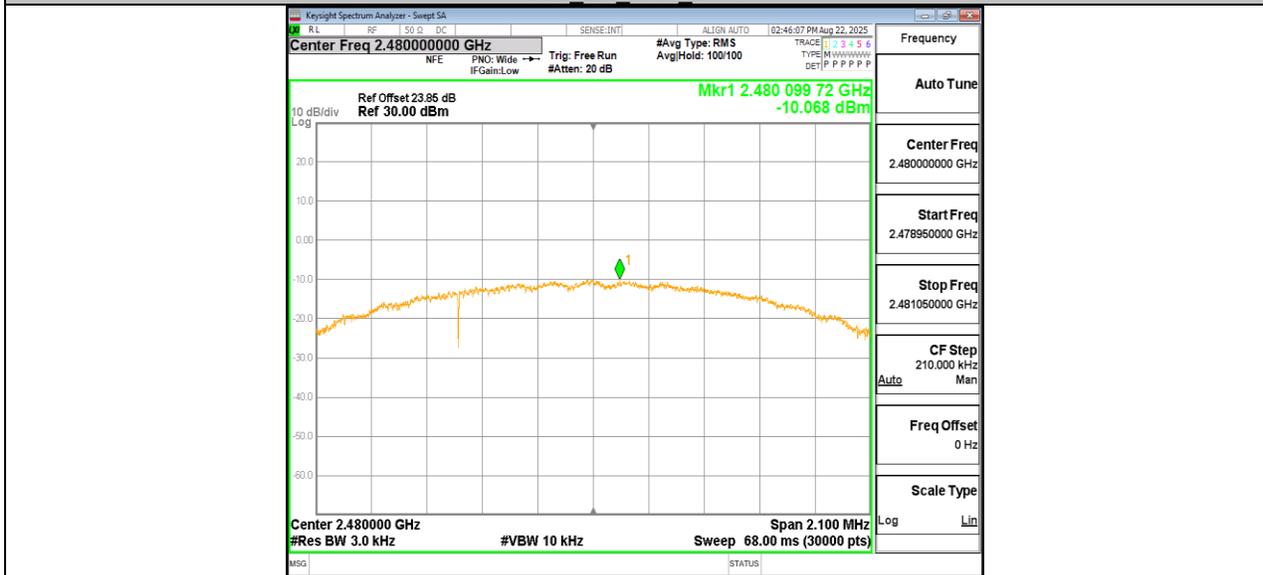


BLE\_2M\_Ant1\_2480

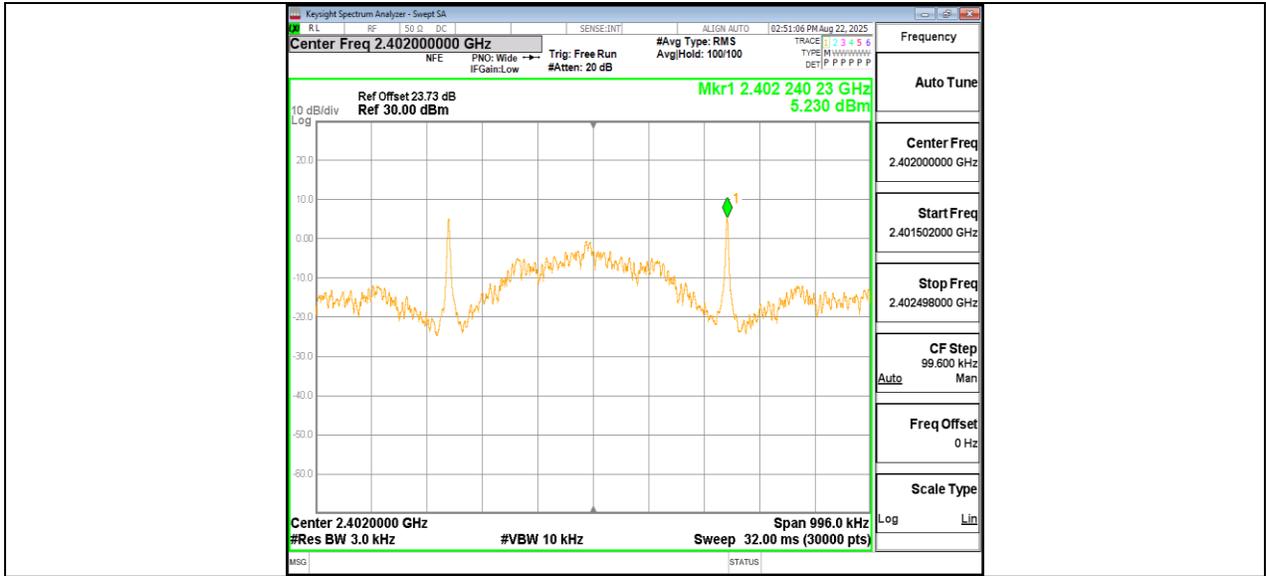


BLE\_125K\_Ant1\_2402

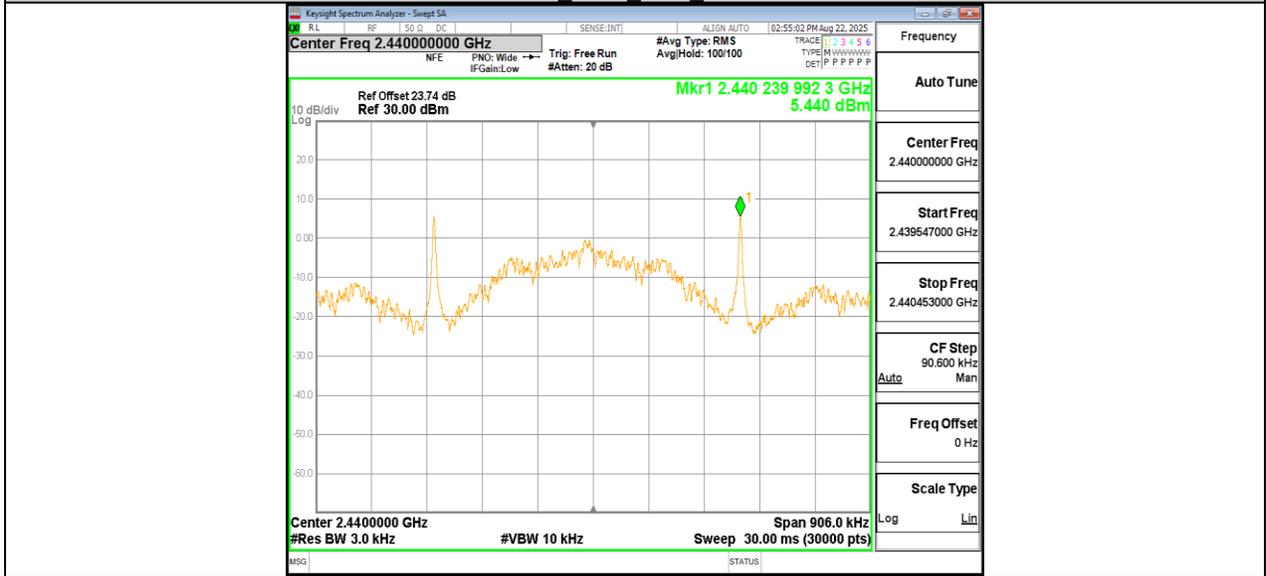


BLE\_125K\_Ant1\_2440

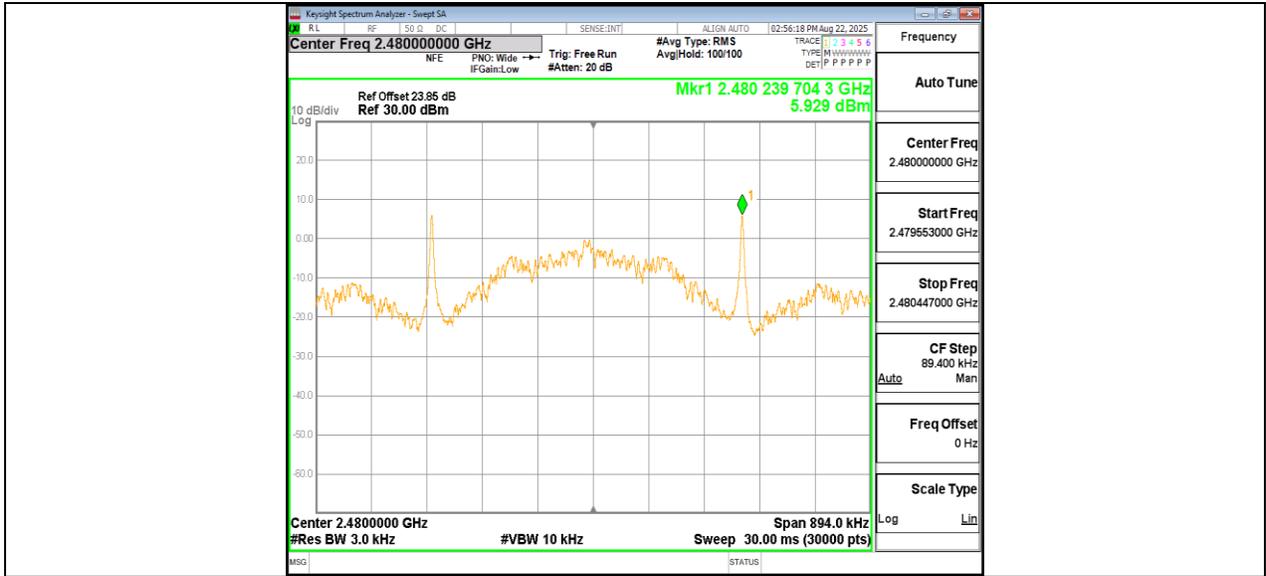


BLE 125K Ant1 2480

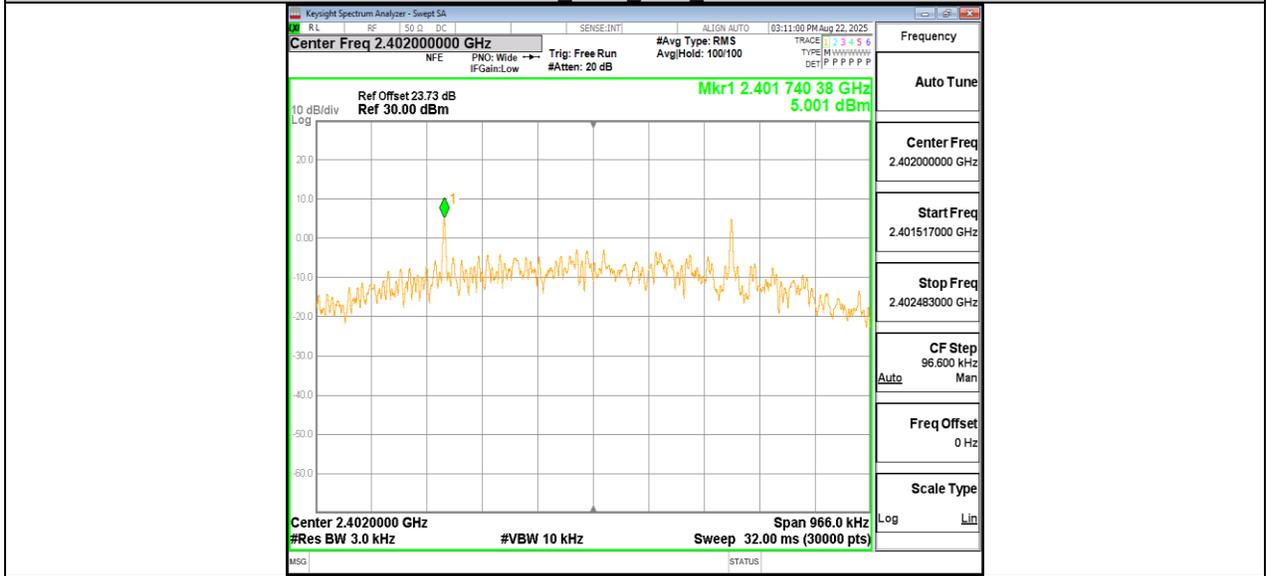

BLE 500K Ant1 2402

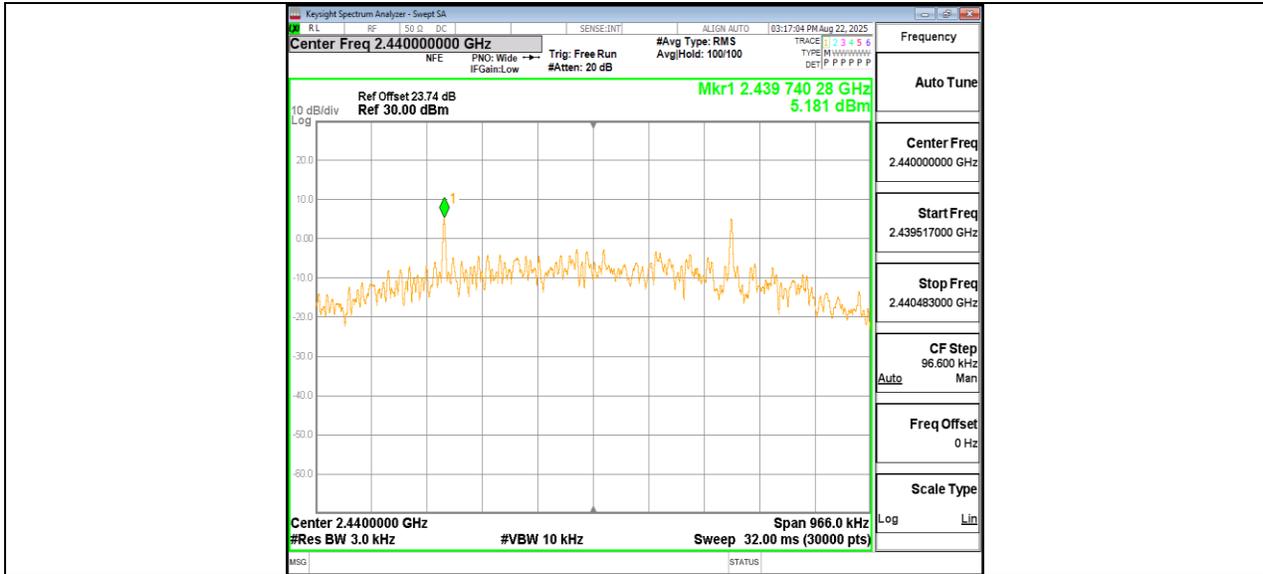

BLE 500K Ant1 2440

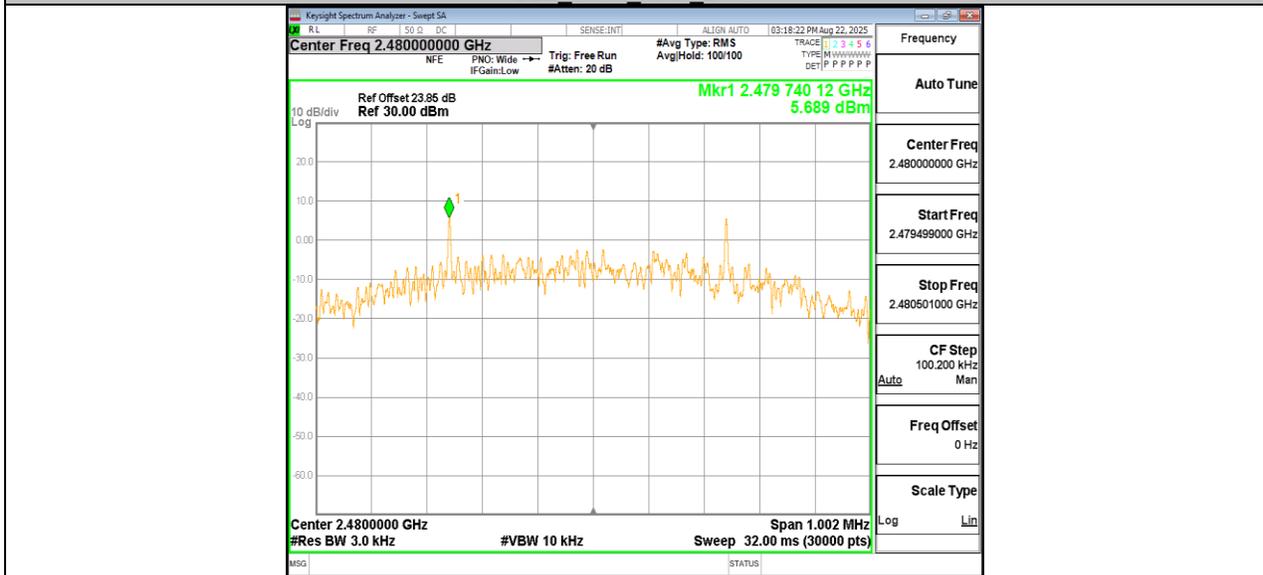

BLE 500K Ant1 2480


## 11.5. APPENDIX E: BAND EDGE MEASUREMENTS

### 11.5.1. Test Result


Test Mode	Antenna	ChName	Frequency [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	11.08	-27.65	≤-8.92	PASS
		High	2480	11.70	-31.33	≤-8.3	PASS
BLE_2M	Ant1	Low	2402	8.39	-23.28	≤-11.61	PASS
		High	2480	8.60	-42.86	≤-11.4	PASS
BLE_125K	Ant1	Low	2402	8.31	-29.64	≤-11.69	PASS
		High	2480	8.54	-32.76	≤-11.47	PASS
BLE_500K	Ant1	Low	2402	11.41	-29.34	≤-8.59	PASS
		High	2480	11.76	-32.18	≤-8.24	PASS

### 11.5.2. Test Graphs



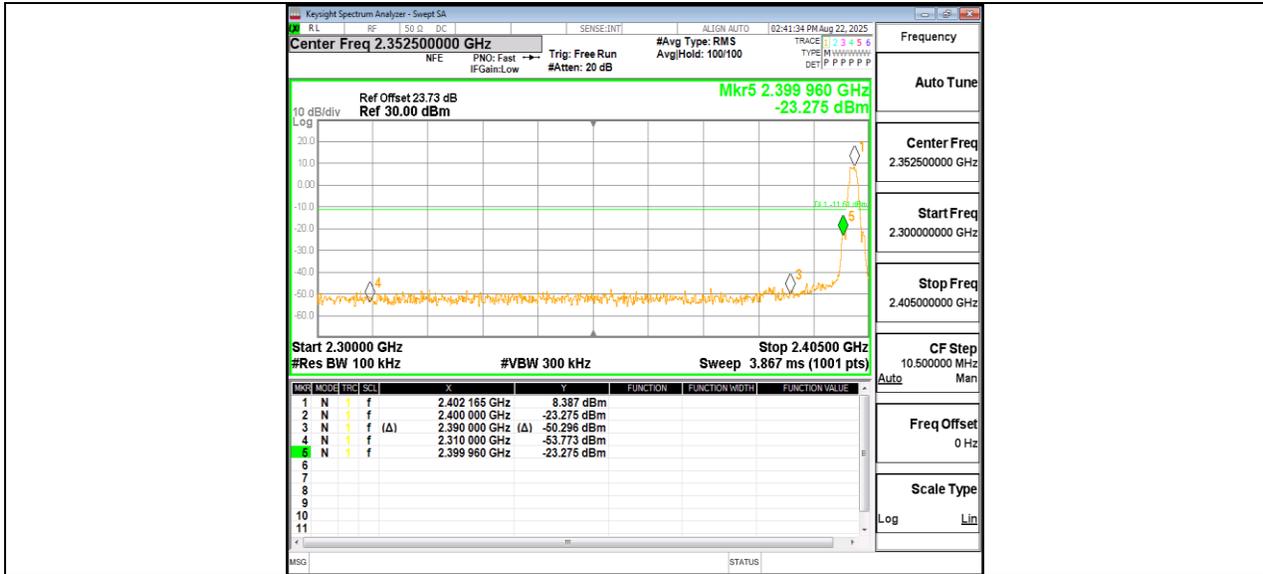

BLE 2M Ant1 Low 2402

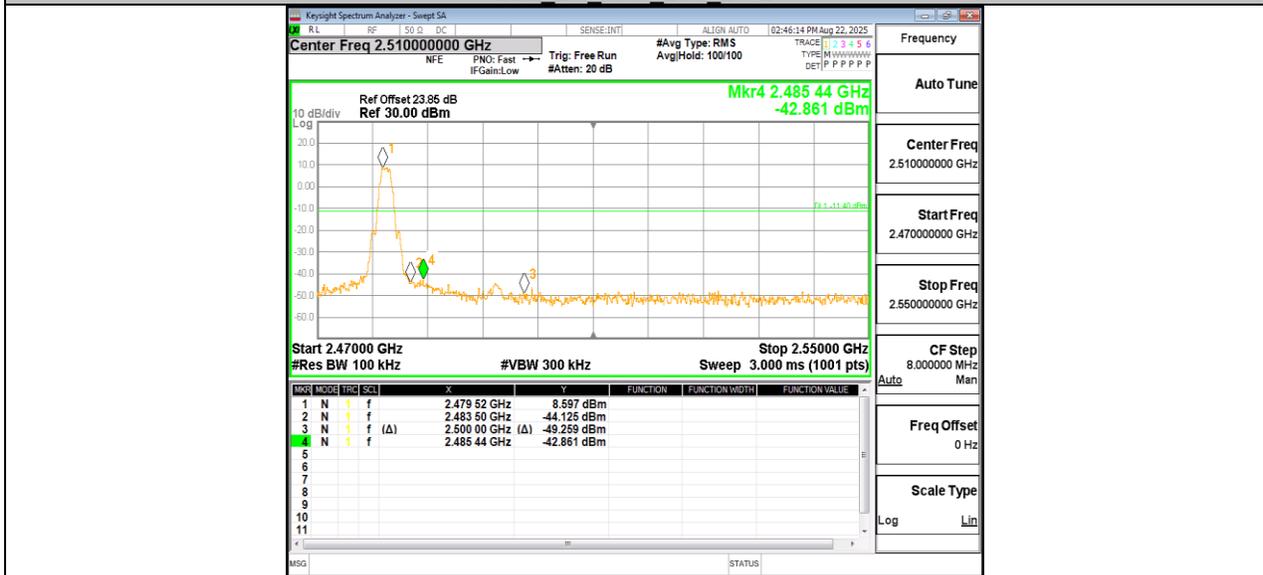

BLE 2M Ant1 High 2480