



Inter|Lab®

FCC Measurement/Technical Report on

Remote Control Transceiver 433MHz

Cobra100TxCS4S

Report Reference: MDE_SCHMI_1301_FCCa

FCC ID: 2AB65COBRA100TXCS4S

Test Laboratory:

7Layers AG
Borsigstrasse 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Peter Mertel
Vorstand • Board:
Dr. H.-J. Meckelburg
Dr. H. Ansorge

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT No.:
DE 203159652
TAX No. 147/5869/0385



Table of Contents

0	Summary	3
0.1	Technical Report Summary	3
0.2	Measurement Summary	4
1	Administrative Data	5
1.1	Testing Laboratory	5
1.2	Project Data	5
1.3	Applicant Data	5
1.4	Manufacturer Data	5
2	Test object Data	6
2.1	General EUT Description	6
2.2	EUT Main components	7
2.3	Ancillary Equipment	7
2.4	Auxiliary Equipment	7
2.5	EUT Setups	7
2.6	Operating Modes	8
2.7	Product labelling	8
3	Test Results	9
3.1	Duty cycle measurement (based on dwell time measurement)	9
3.2	Spurious radiated emissions	11
3.3	Peak power output	18
3.4	Occupied bandwidth	19
4	Test Equipment	20
5	Photo Report	26
6	Setup Drawings	26
7	Correlation of measurement requirements for Momentarily (incl. Periodically) Operated Devices and Remote Control from FCC and IC	27
8	Annex measurement plots	28
8.1	Duty cycle measurement (based on dwell time measurement)	28
8.2	Spurious radiated emissions	30
8.3	Occupied bandwidth	34



0 Summary

0.1 Technical Report Summary

Type of Authorization

Certification for an Intentional Radiator (Periodic operation in the band above 70 MHz)

Applicable FCC Rules

Edition of FCC Rules: 10-1-13

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15. The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.231 Periodic operation in the band 40.66-40.70 MHz, above 70 MHz

Note:
none

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 0.2 Measurement Summary.



0.2 Measurement Summary

FCC Part 15, Subpart C		§ 15.207	
Conducted emissions (AC power line)			
The measurement should be performed according to ANSI C63.4		2009	
OP-Mode	Setup	Port	Final Result
		AC Port (power line)	N/A
FCC Part 15, Subpart C		§ 15.231	
Duty cycle measurement (based on dwell time measurement)			
The measurement was performed according to FCC § 15.31		10-1-13 Edition	
OP-Mode	Setup	Port	Final Result
op-mode 1	Setup_01	Enclosure	No verdict*
FCC Part 15, Subpart C		§ 15.231	
Spurious Radiated Emissions			
The measurement was performed according to ANSI C63.4		2009	
OP-Mode	Setup	Port	Final Result
op-mode 2	Setup_01	Enclosure	passed
FCC Part 15, Subpart C		§ 15.231	
Peak power output			
The measurement was performed according to ANSI C63.4		2009	
OP-Mode	Setup	Port	Final Result
op-mode 3	Setup_01	Enclosure	passed
FCC Part 15, Subpart C		§ 15.231	
Occupied Bandwidth			
The measurement was performed according to FCC § 15.31		10-1-13 Edition	
OP-Mode	Setup	Port	Final Result
op-mode 1	Setup_01	Enclosure	passed

N/A not applicable (the EUT is powered by DC)

*) The test was only performed to determine the duty cycle correction factor. No limits are defined and consequently no verdict is given.

Responsible for Accreditation Scope:

B. Patk

Responsible for Test Report:

M. Kullik



1 Administrative Data

1.1 Testing Laboratory

Company Name: 7Layers AG
Address Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716.

The test facility is also accredited by the following accreditation organisation:
Laboratory accreditation no.: DAkKS D-PL-12140-01-01

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka
Dipl.-Ing. Robert Machulec
Dipl.-Ing. Andreas Petz
Dipl.-Ing. Marco Kullik

Report Template Version: 2012-03-14

1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Marco Kullik
Date of Test(s): 2014-05-05 to 2014-08-04
Date of Report: 2014-08-08

1.3 Applicant Data

Company Name: Schmidiger GmbH
Address: Gutenegg
6125 Menzberg
Switzerland
Contact Person: Mr. Fabian Kugler

1.4 Manufacturer Data

Company Name: please see applicants data
Address:

Company Name:

Address:



2 Test object Data

2.1 General EUT Description

Equipment under Test	Handheld Transceiver
Type Designation:	Cobra100TxCS4S
Kind of Device:	Remote Control Transceiver 433MHz
Voltage Type:	DC battery
Voltage level:	3.0 V
Repeated Operation:	Manually
The EUT is part of a security or safety system:	No

General product description:

The Equipment Under Test (EUT) is a wireless handheld transceiver. According to its technical specification FCC Rule Part 15.231 (Periodic operation in the band 40.66-40.70 MHz and above 70 MHz) applies. The handheld transceiver is part of the bidirectional Cobra 100 radio control system. The system has 14 channels with channel spacing of 100 kHz between 433.125 (channel 1) and 434.725 MHz (channel 14).

The EUT is available in two configurations: 8+1 buttons and 4+1 buttons. Besides the different number of buttons the Hardware and Software of the different configurations are identical. A comparison measurement showed that EUT A (8+1 buttons) produces higher emissions than EUT B (4+1 buttons). Thus all testing was performed with EUT A (worst case). Please refer to next page for the definition of EUT A and EUT B.

The product name which is used by the manufacturer in the user manual and in the internal documentation is "Handheld Transmitter" or just "Transmitter", since its main function within the Cobra 100 radio control system is transmitting data.

Specific product description for the EUT:

none

The EUT provides the following ports:

Ports

Enclosure

The main components of the EUT are listed and described in Chapter 2.2.



2.2 EUT Main components

Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A (7Layers Code: DE1033000aa01)	Handheld Transceiver	Cobra100Tx CS4S	Test sample aa01	8+1 buttons	01/20/13	2014-04-07
Remark: EUT A is equipped with an integral antenna.						
EUT B (7Layers Code: DE1033000ab01)	Handheld Transceiver	Cobra100Tx CS4S	Test sample ab01	4+1 buttons	01/20/13	2014-04-07
Remark: EUT B is equipped with an integral antenna.						

NOTE: The short description is used to simplify the identification of the EUT in this test report.

2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	HW Status	SW Status	Serial no.	FCC ID
-	-	-	-	-	-	-

2.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial no.	HW Status	SW Status	FCC ID
-	-	-	-	-	-	-

2.5 EUT Setups

This chapter describes the combination of EUTs and ancillary equipment used for testing.

Setup No.	Combination of EUTs	Description
Setup_01	EUT A	setup used for all measurements



2.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

Op. Mode	Description of Operating Modes	Remarks
op-mode 1	periodic operation	Transmitter is sending multiple telegram sequences with 12 ms pulse and 56 ms pause (normal operation)
op-mode 2	continuous operation, modulated	Transmitter is sending continuously. The carrier is modulated (Continuous Modulation - CM) (special operating mode for test purpose only)
op-mode 3	continuous operation, unmodulated	Transmitter is sending continuously. The carrier is unmodulated (Continuous Wave - CW) (special operating mode for test purpose only)

2.7 Product labelling

2.7.1 FCC ID label

FCC ID: 2AB65COBRA100TXCS4S

2.7.2 Location of the label on the EUT

Please refer to separate documentation.



3 Test Results

3.1 Duty cycle measurement (based on dwell time measurement)

Standard FCC Part 15, 10-1-13 Edition Subpart C

The test was performed according to: FCC §15.35, §15.231

3.1.1 Test Description

The Equipment Under Test (EUT) was setup in a shielded room to perform the dwell time measurements. For analyzer settings please see measurement plots in annex.

3.1.2 Test Limits

Depending on the function of the EUT different paragraphs of FCC §15.231 apply:

Either

(a)(1): A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Or

(a)(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

And

(a)(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

Otherwise

(e) Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation [...]. In addition, [...] the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

This test is also performed to determine the pulse train of the transmitter and calculate the correction factor for pulse modulated transmitters according to FCC §15.35. This factor is used as a correction factor for the field strength measurements, both for Spurious radiated emissions and Peak power output.



3.1.3 Test Protocol

Temperature: 22 °C
 Air Pressure: 1010 hPa
 Humidity: 38 %

Op. Mode	Setup	Port
op-mode 1	Setup_01	Enclosure

Determine the total duration of a transmission within 100 ms:

Duty cycle = $(L1 \cdot N1) + (L2 \cdot N2) + \dots + (Ln \cdot Nn) / 100 \text{ ms or } T$, whichever is less
 Correction factor = $20 \cdot \text{LOG}(\text{Duty cycle}) \text{ [dB]}$

Step 1	Holdover time	Less than 5 s
Step 2	Cycle to determine the on/off ratio within a cycle (period T)	69.7 ms
Step 3	Determine the number of pulses (N1-NN). First range (trigger offset = -2 ms).	N1 = 1 L1 = 12.2 ms

The longest transmission period within the transmitter is "on" is the worst case.
 According to the measured values, the pulse with 12.2 ms length is the worst case.

Calculation of Duty Cycle / Correction Factor:
 If $T > 100 \text{ ms} \Rightarrow T = 100 \text{ ms}$;

Duty Cycle = $L1 \cdot N1 / T = 12.2 / 69.7 = 0.175$

Correction factor = $20 \cdot \text{LOG}(0.175) \text{ dB} = 20 \cdot (-0.75696) \text{ dB} = -15.139 \text{ dB}$

The worst case duty cycle correction factor is rounded to: **-15 dB**.

3.1.4 Test result: Duty cycle / correction factor

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	no verdict*

*) The test was only performed to determine the duty cycle correction factor. No limits are defined and consequently no verdict is given.

3.2 Spurious radiated emissions

Standard FCC Part 15, 10-1-13 Edition Subpart C

The test was performed according to: FCC §15.31, ANSI C 63.4

3.2.1 Test Description

The radiated emissions measurements were performed in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C 63.4. The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 – 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 10 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level with QP detector.

- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz - 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 μ s
- Turntable angle range: -180 to 180°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180 to 180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved.

This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by $\pm 22.5^\circ$ around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by ± 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -22.5° to $+ 22.5^\circ$ around the determined value
- Height variation range: -0.25 m to $+0.25$ m around the determined value

Step 4a: final measurement with QP detector in case of non-pulsing signals

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

Step 4b: applying a duty cycle correction factor in case of pulsing signals

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18-25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

Important EMI receiver settings:

- Detector: Peak, Average
- RBW = 1 MHz, VBW = 10 MHz
- Sweptime = 100 ms / per 100 MHz sweep

In case of pulsing signals the average value is derived by applying a duty cycle correction factor to the measured peak value instead of using the average detector.

3.2.2 Test Requirements / Limits

1) A radiated emission test is relating to the fundamental frequency.

a) Either for “non-periodic” operation of the EUT as defined in §15.231(a) the limits for the average field strength apply according to FCC Part 15, Subpart C, §15.231(b):

For fundamental frequency (MHz)	Limit Fundamental (dBµV/m)	Limit Spurious (dBµV/m)
40.66 – 40.70	67.0	47.0
70 – 130	67.0	47.0
130 – 174	67.0 – 71.5 *)	47.0 – 51.5 *)
174 – 260	71.5	51.5
260 – 470	71.5 – 81.9 *)	51.5 – 61.9 *)
above 470	81.9	61.9

b) Or for “periodic” operation of the EUT the limits for the average field strength apply according to FCC Part 15, Subpart C, §15.231(e):

For fundamental frequency (MHz)	Limit Fundamental (dBµV/m)	Limit Spurious (dBµV/m)
40.66 – 40.70	60.0	40.0
70 – 130	54.0	34.0
130 – 174	54.0 – 63.5 *)	34.0 – 43.5 *)
174 – 260	63.5	43.5
260 – 470	63.5 – 74.0 *)	43.5 – 54.0 *)
above 470	74.0	54.0

*) linear interpolation

(1) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.



2) A radiated emission test applies to harmonic/spurs that fall in the restricted bands as listed in § 15.205(a). The maximum permitted QP (< 1 GHz) and Average (> 1GHz) field strength is listed in § 15.209(a):

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Calculate Limit(dBµV/m @10m)	Limit (dBµV/m) @10m
0.009 – 0.49	2400/F (kHz)	300	(48.5 – 13.8) + 59.1 dB	107.6 – 77.9
0.49 – 1.705	24000/F (kHz)	30	(48.9 – 23.0) + 19.1 dB	68.0 – 42.1
1.705 – 30	30	30	29.5 + 19.1 dB	48.6

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
30 – 88	100	3	40.0
88 – 216	150	3	43.5
216 – 960	200	3	46.0
above 960	500	3	54.0

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)

§15.35(c):

[...] when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted [...].

§15.231(b)(3)

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator.

Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

Interpretation of the test laboratory:

The last subordinate clause of §15.231(b)(3) is overruled by §15.205/209, therefore within the restricted bands the limits defined at §15.205/209 and outside the restricted bands the limits defined at §15.231(b) resp. §15.231(e) are applied.

3.2.3 Test Protocol

3.2.3.1 Measurement up to 30 MHz

Temperature: 24 °C
 Air Pressure: 1006 hPa
 Humidity: 38 %

Op. Mode	Setup	Port
op-mode 2	Setup_01	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Margin to limit dB	Margin to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
0°	–	–	–	–	–	–	–	–	–
90°	–	–	–	–	–	–	–	–	–

Remarks:

- No relevant spurious emissions found in step 1, therefore step 2 was not performed.

3.2.3.2 Measurement 30 MHz – 1 GHz

Temperature: 24 °C
 Air Pressure: 1006 hPa
 Humidity: 38 %

Op. Mode	Setup	Port
op-mode 2	Setup_01	Enclosure

channel 1									
Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Margin to limit dB	Margin to limit dB
		QP	Peak	AV	QP	Peak	AV	Peak	AV
horiz+vert	435.0	–	44.7	29.7	–	66	46	21.3	16.3
horiz+vert	436.8	–	43.7	28.7	–	66	46	22.3	17.3
horiz+vert	438.7	–	47.9	32.9	–	66	46	18.1	13.1
horiz+vert	475.5	–	46.7	31.7	–	66	46	19.3	14.3
horiz+vert	482.9	–	46.1	31.1	–	66	46	19.9	14.9
horiz+vert	866.2	–	41.9	26.9	–	66	46	24.1	19.1
channel 14									
Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Margin to limit dB	Margin to limit dB
		QP	Peak	AV	QP	Peak	AV	Peak	AV
horiz+vert	427.1	–	43.8	28.8	–	66	46	22.2	17.2
horiz+vert	441.8	–	46.4	31.4	–	66	46	19.6	14.6
horiz+vert	442.4	–	44.5	29.5	–	66	46	21.5	16.5
horiz+vert	478.7	–	47.9	32.9	–	66	46	18.1	13.1
horiz+vert	486.1	–	45.3	30.3	–	66	46	20.7	15.7
horiz+vert	891.7	–	43.2	28.2	–	66	46	22.8	17.8



Remarks:

- Maximum radiated spurious emissions. All three axis (Y,Y,Z) of the device and both antenna polarizations (H/V) were considered.
- The Transmitter is sending continuously (special operating mode for test purpose only). The carrier is modulated.
- The values given in the columns "AV" represent the peak values corrected with the Duty Cycle Correction Factor of -15 dB, calculated in 3.1.3. It was checked by the laboratory that the corresponding emissions are pulsed in the same manner as the wanted signal.
- Only the highest emissions are reported.



3.2.3.3 Measurement above 1 GHz

Temperature: 24 °C
 Air Pressure: 1006 hPa
 Humidity: 38 %

Op. Mode	Setup	Port
op-mode 2	Setup_01	Enclosure

channel 1									
Polarisation	Frequency GHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Margin to limit dB	Margin to limit dB
		QP	Peak	AV	QP	Peak	AV	Peak	AV
horiz+vert	1.733	-	44.4	29.3	-	74	54	29.6	24.6
horiz+vert	2.166	-	46.2	31.2	-	74	54	27.8	22.8
horiz+vert	2.599	-	48.7	33.7	-	74	54	25.3	20.3
horiz+vert	3.032	-	62.6	47.6	-	74	54	11.4	6.4
horiz+vert	3.465	-	43.2	28.2	-	74	54	30.8	25.8
channel 14									
Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Margin to limit dB	Margin to limit dB
		QP	Peak	AV	QP	Peak	AV	Peak	AV
horiz+vert	1.739	-	44.6	29.6	-	74	54	29.4	24.4
horiz+vert	1.897	-	35.6	20.6	-	74	54	38.4	33.4
horiz+vert	2.174	-	47.0	32.0	-	74	54	27.0	22.0
horiz+vert	2.609	-	49.8	34.8	-	74	54	24.2	19.2
horiz+vert	3.043	-	63.9	48.9	-	74	54	10.1	5.1
horiz+vert	3.478	-	42.8	27.8	-	74	54	31.2	26.2

Remarks:

- Maximum radiated spurious emissions. All three axis (Y,Y,Z) of the device and both antenna polarizations (H/V) were considered.
- The Transmitter is sending continuously (special operating mode for test purpose only). The carrier is modulated.
- The values given in the columns "AV" represent the peak values corrected with the Duty Cycle Correction Factor of -15 dB, calculated in 3.1.3. It was checked by the laboratory that the corresponding emissions are pulsed in the same manner as the wanted signal.
- Only the highest emissions are reported.
- The test was performed in the frequency range from 1 GHz to 4.5 GHz.

3.2.4 Test result: Spurious radiated emissions

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 2	passed



3.3 Peak power output

Standard FCC Part 15, 10-1-13 Edition Subpart C

The test was performed according to: FCC §15.31, §15.231, ANSI C 63.4

3.3.1 Test Description

Please refer to sub-clause 3.2.1.

3.3.2 Test Limits

Please refer to sub-clause 3.2.2.

3.3.3 Test Protocol

Temperature: 23 °C
 Air Pressure: 1006 hPa
 Humidity: 38 %

Op. Mode	Setup	Port
op-mode 2	Setup_01	Enclosure

Channel	Frequency MHz	Output power dBµV/m (Peak)	Output Power dBµV/m (AV)	Limit dBµV/m (AV)	Margin dB
1	433.125	95.5	80.5	80.8	0.3
14	434.725	94.3	79.3	80.8	1.5

Remarks:

- Maximum radiated field strength at fundamental frequency. All three axis (Y,Y,Z) of the device and both antenna polarizations (H/V) were considered.
- The Transmitter is sending continuously (special operating mode for test purpose only). The carrier is unmodulated.
- The measured peak values are corrected in order to obtain the AV value using the Duty Cycle Correction Factor = -15 dB, calculated in 3.1.3..

3.3.4 Test result: Peak power output

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 3	passed



3.4 Occupied bandwidth

Standard FCC Part 15, 10-1-13 Edition Subpart C

The test was performed according to: FCC §15.231

3.4.1 Test Description

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

For analyzer settings please see measurement plots in annex.

3.4.2 Test Limits

FCC Part 15, Subpart C, §15.231(c)

The maximum 20 dB bandwidth of a transmitter operating at a frequency range:

70 to 900 MHz is 0.25% of the centre frequency

above 900 MHz is 0.5% of the centre frequency

3.4.3 Test Protocol

Temperature: 22 °C

Air Pressure: 1006 hPa

Humidity: 38 %

Op. Mode	Setup	Port
op-mode 1	Setup_01	Enclosure

20 dB bandwidth kHz	Limit kHz	Remarks
		channel 1
37.5	1086.875	The limit is calculated as 434.725 MHz * 0.25% = 1086.875 kHz.
		channel 14
37.7	1086.875	The limit is calculated as 434.725 MHz * 0.25% = 1086.875 kHz.

Remark: Please see annex for the measurement plots.

For information: The 99% Bandwidth for channel 1 is 36.5 kHz.

The 99% Bandwidth for channel 14 is 36.3 kHz.

3.4.4 Test result: Occupied bandwidth

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed

4 Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 2		
Manufacturer:	Frankonia		
Description:	Anechoic Chamber for radiated testing		
Type:	10.58x6.38x6.00 m ³		
	NSA (FCC)	2014/01/09	2017/01/09

Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³ FCC listing 96716 3m Part15/18	none	Frankonia 2014/01/09 2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Conducted emissions

Lab ID:	Lab 1
Manufacturer:	Rohde & Schwarz GmbH & Co.KG
Description:	EMI Conducted Auxiliary Equipment

Single Devices for Auxiliary Equipment for Conducted emissions

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Impedance Stabilization Network	ISN T800	36159	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/02/06 2016/02/28
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/03/01 2015/03/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ST08	36292	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/01/10 2016/01/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN T8-Cat6	32187	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/01/08 2016/01/31



Single Devices for Auxiliary Equipment for Conducted emissions (continued)

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
One-Line V-Network	ESH 3-Z6	100489	Rohde & Schwarz GmbH & Co. KG	
One-Line V-Network	ESH 3-Z6	100570	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2013/11/25	2016/11/24
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standart Calibration		2013/03/01	2015/02/28
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2013/03/01	2015/02/28

Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID: Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>		
Antenna mast	AM 4.0	AM4.0/180/119205 13	Maturo GmbH		
Antenna mast	AS 620 P	620/37	HD GmbH		
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck		
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard Calibration		2012/01/18	2015/01/17	
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq		
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq		
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq		
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01- 2	Kabel Kusch		
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02- 2	Rosenberger Micro-Coax		
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard Calibration		2012/05/18	2015/05/17	
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard Calibration		2012/06/26	2015/06/25	
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic		
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic		
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic		
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright		
Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170	BBHA 9170				
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard Calibration		2012/12/18	2015/12/17	
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG		
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard calibration		2011/10/27	2014/10/26	



Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5- 10kg/024/3790709	Maturo GmbH

Test Equipment Auxiliary Test Equipment

Lab ID:	Lab 2, Lab 3
Manufacturer:	see single devices
Description:	Single Devices for various Test Equipment
Type:	various
Serial Number:	none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03
Fibre optic link (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorwerke GmbH
Notch Filter (Aux)	Ultra Stable WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2014/02/10 2016/02/09
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2012/06/13 2015/06/12
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/07/29 2014/07/28
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG



Test Equipment Radio Lab Test Equipment

Lab ID: Lab 3
Description: Radio Lab Test Equipment

Single Devices for Radio Lab Test Equipment

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
Broadband Power Divider SMA	WA1515	A856	Weinschel Associates	
Coax Attenuator 10dB SMA 2W	4T-10	F9401	Weinschel Associates	
Coax Attenuator 10dB SMA 2W	56-10	W3702	Weinschel Associates	
Coax Attenuator 10dB SMA 2W	56-10	W3711	Weinschel Associates	
Coax Cable Huber&Suhner	Sucotest 2,0m		Huber&Suhner	
Coax Cable Rosenberger Micro Coax SMA/SMA 1,0m	FA210A0010003030	54491-2	Rosenberger Micro-Coax	
Signal Generator SME	SME03	827460/016	Rohde & Schwarz GmbH & Co.KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration		2011/11/25	2014/11/24
Signal Generator SMP	SMP02	836402/008	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration		2013/05/06	2016/05/05
Spectrum Analyser	FSIQ26	840061/005	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2013/02/12	2015/02/11
Temperature Chamber Vötsch 03	VT 4002	58566002150010	Vötsch	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Customized calibration		2012/03/12	2014/03/11
	Customized calibration		2014/03/11	2016/03/10



Test Equipment Temperature Chamber 01

Lab ID: Lab 4
Manufacturer: see single devices
Description: Temperature Chamber KWP 120/70
Type: Weiss
Serial Number: see single devices


Single Devices for Temperature Chamber 01

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Customized calibration		2012/03/12	2014/03/11
	Customized calibration		2014/03/12	2016/03/11

5 Photo Report

Photos are included in an external report.

6 Setup Drawings

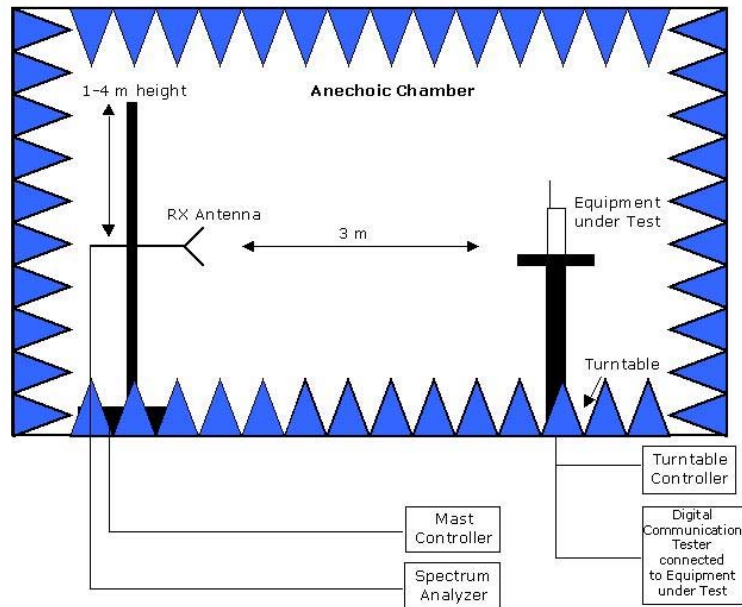

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.



7 Correlation of measurement requirements for Momentarily (incl. Periodically) Operated Devices and Remote Control from FCC and IC

Radio equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 3: 7.2.4
Transmitter spurious radiated emissions	§ 15.231 (b) / (e)	RSS Gen Issue 3: 7.2.3, 7.2.5; RSS-210 Issue 8: A1.1.2, A1.1.5
Duty cycle measurement (based on dwell time measurement)	§ 15.231 (a)	RSS-210 Issue 8: A1.1.1, A1.1.5
Peak power output	§ 15.231 (b) / (e)	RSS-210 Issue 8: A1.1.2, A1.1.5; RSS Gen Issue 3: 7.2.3
Occupied bandwidth	§ 15.231 (c)	RSS-210 Issue 8: A1.1.3
Frequency Stability	§ 15.231 (d)	RSS-210 Issue 8: A1.1.4
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 3: 7.1.2
Receiver spurious emissions	–	RSS-210 Issue 8: 2.3 RSS Gen Issue 3: 6 *)

*) Receivers which are part of Transceivers are exempted with respect to Notice 2012-DRS0126.




8 Annex measurement plots

8.1 Duty cycle measurement (based on dwell time measurement)


Op. Mode

Op-mode 1

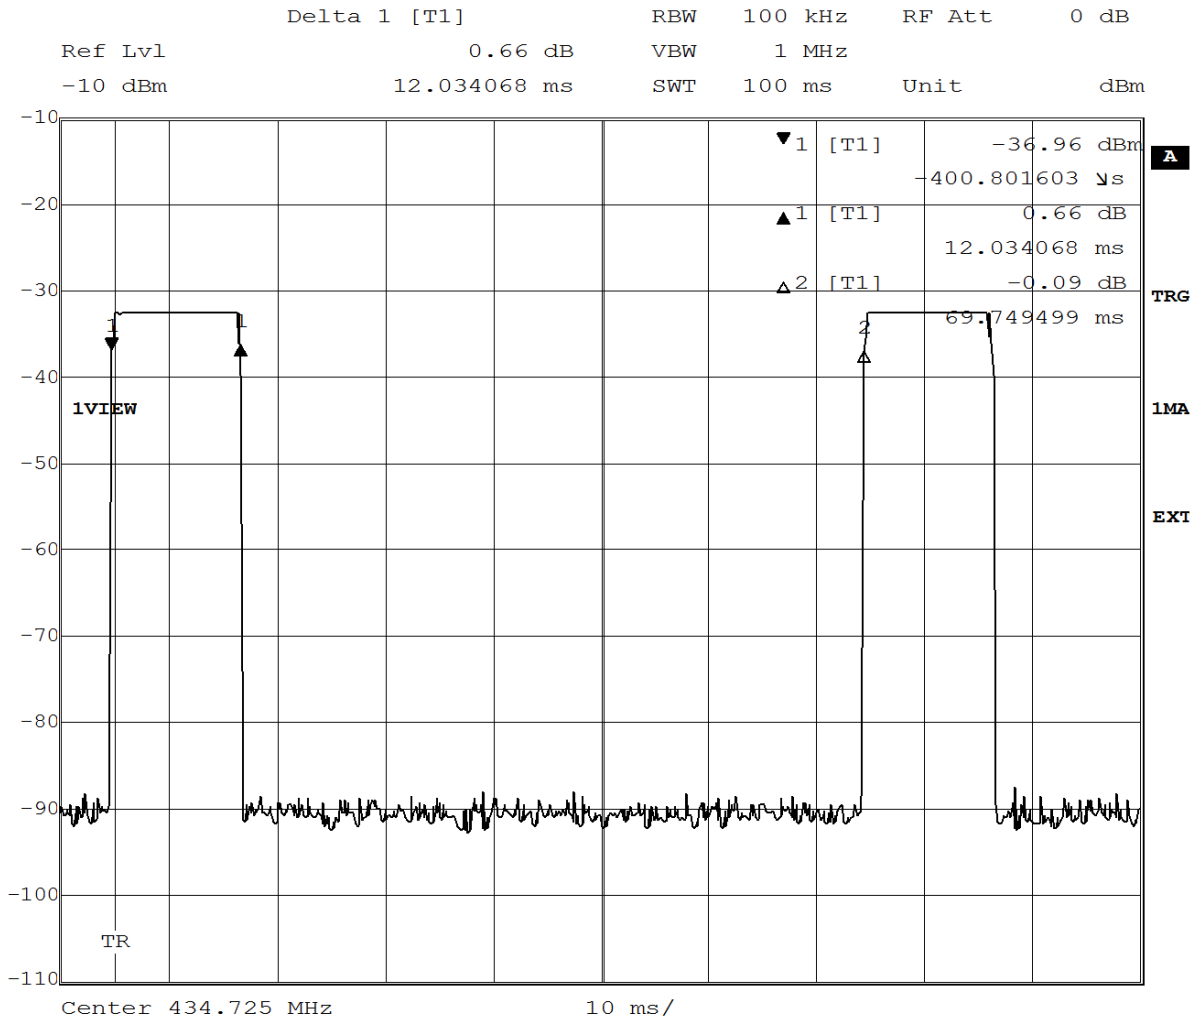

Date: 3.JUN.2014 10:46:57

Step 1: Holdover time, $T_c = 69.7$ ms.

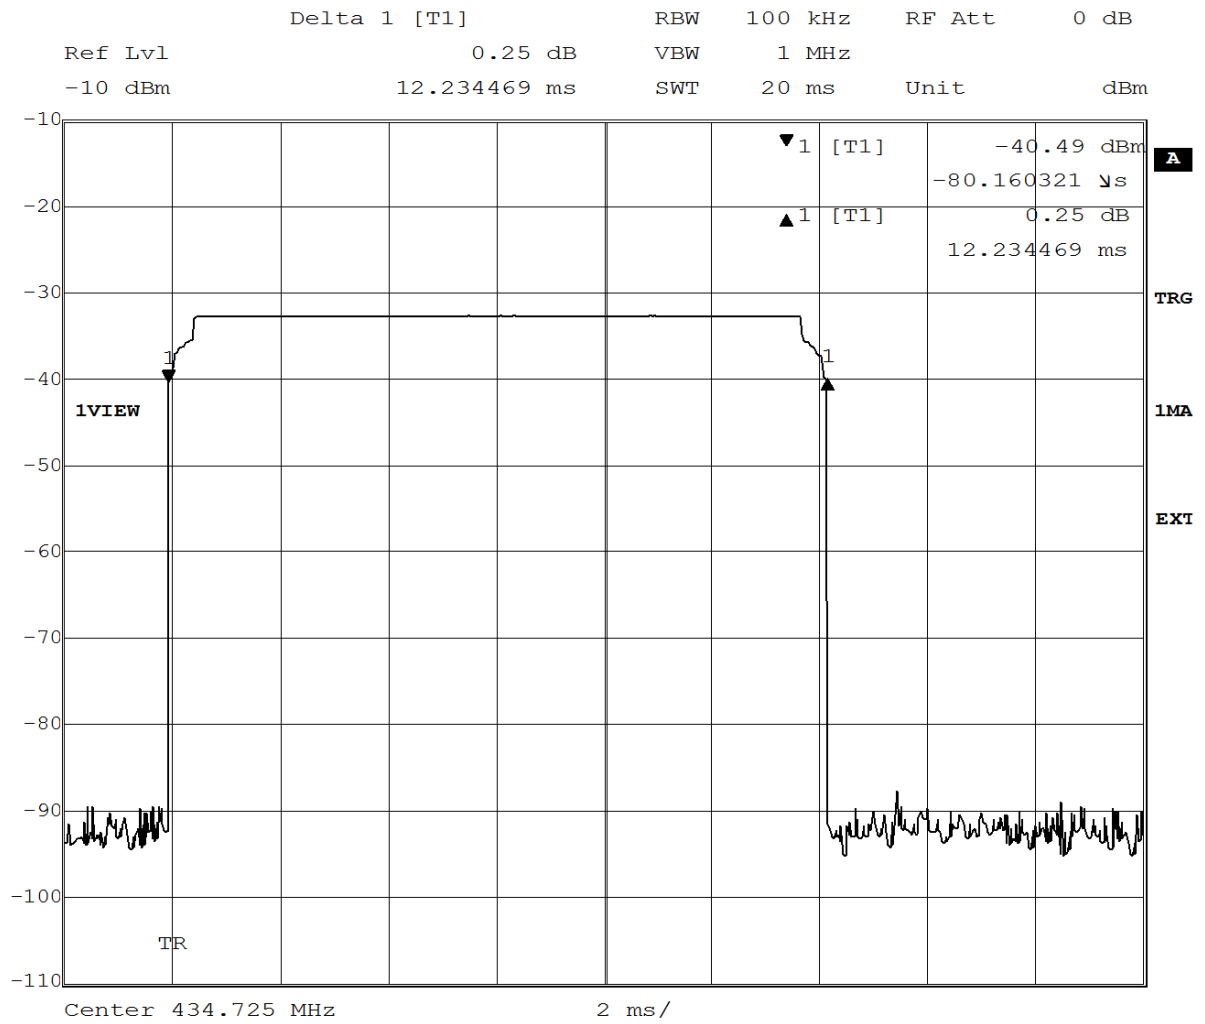


Date: 3.JUN.2014 10:49:27

Step 2: 20 ms sweep, cycle to determine the on/off ratio within a period of 69.7 ms.
 $T_{on} = 12.2$ ms

8.2 Spurious radiated emissions

8.2.1 Spurious radiated emissions for $f < 30$ MHz channel 1, worst case position/configuration


EUT: (DE1033000aa01)
 Manufacturer: Schmidiger GmbH
 Operating Condition: TX on 433,125 MHz, CH: 1
 Test Site: 7 layers, Ratingen
 Test Specification: FCC 15.231
 Comment: Antenna position 90° Side 2 horizontal EUT position

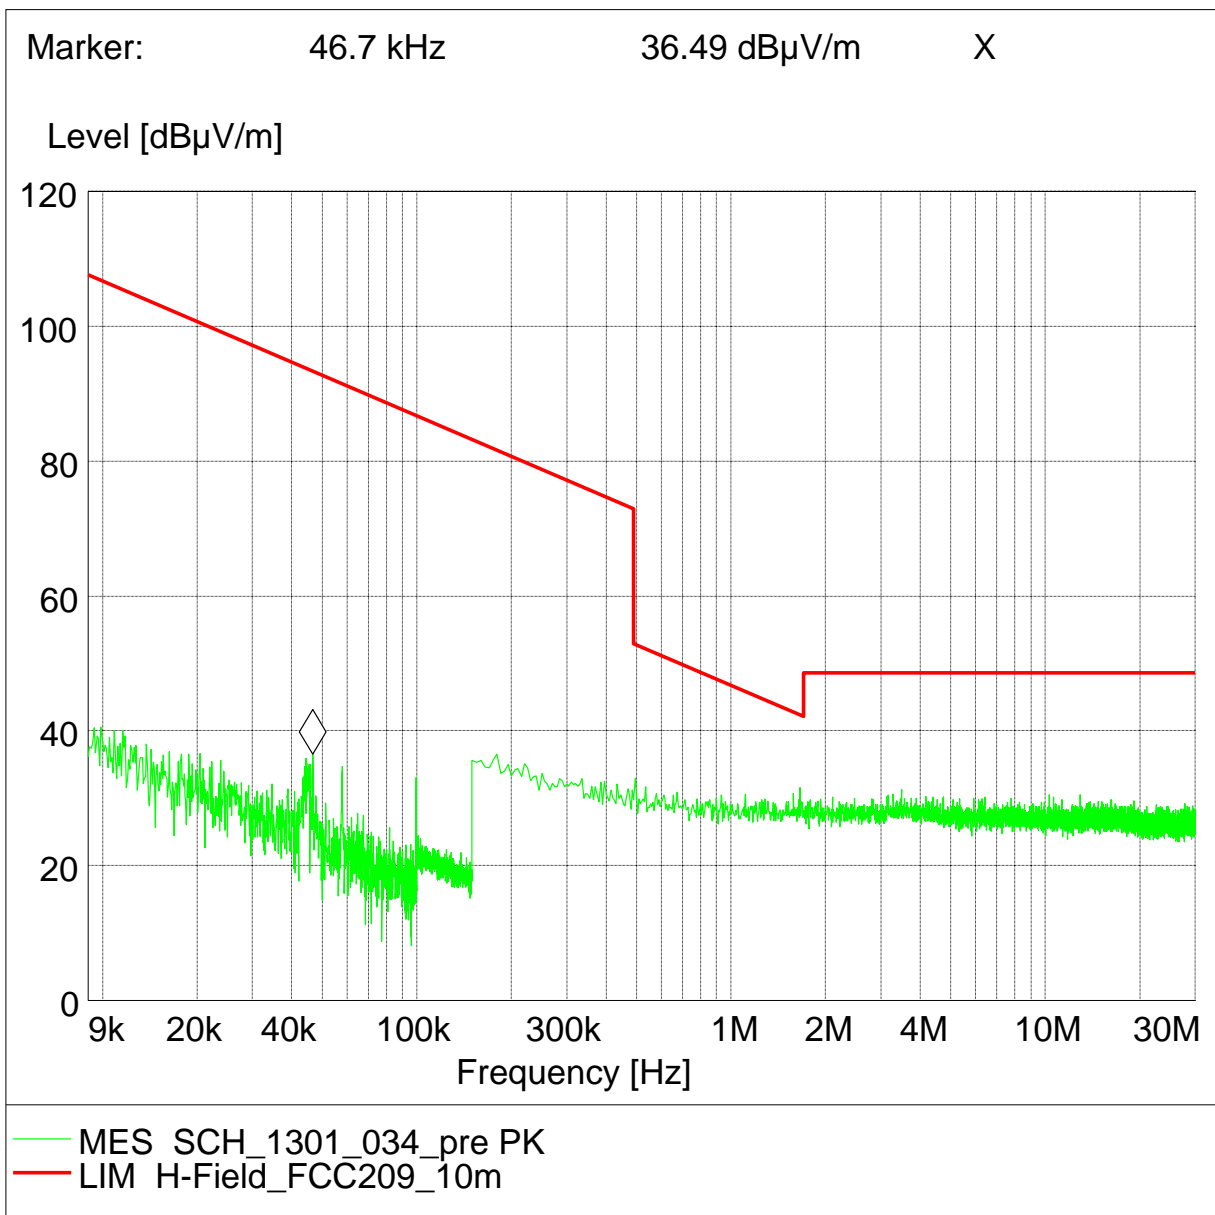



**Spurious radiated emissions for f < 30 MHz
channel 14, worst case position/configuration**

EUT: (DE1033000aa01)
Manufacturer: Schmidiger GmbH
Operating Condition: TX on 434,725 MHz, CH: 14
Test Site: 7 layers, Ratingen
Test Specification: FCC15.231
Comment: Antenna position 90° Side 1 horizontal EUT position

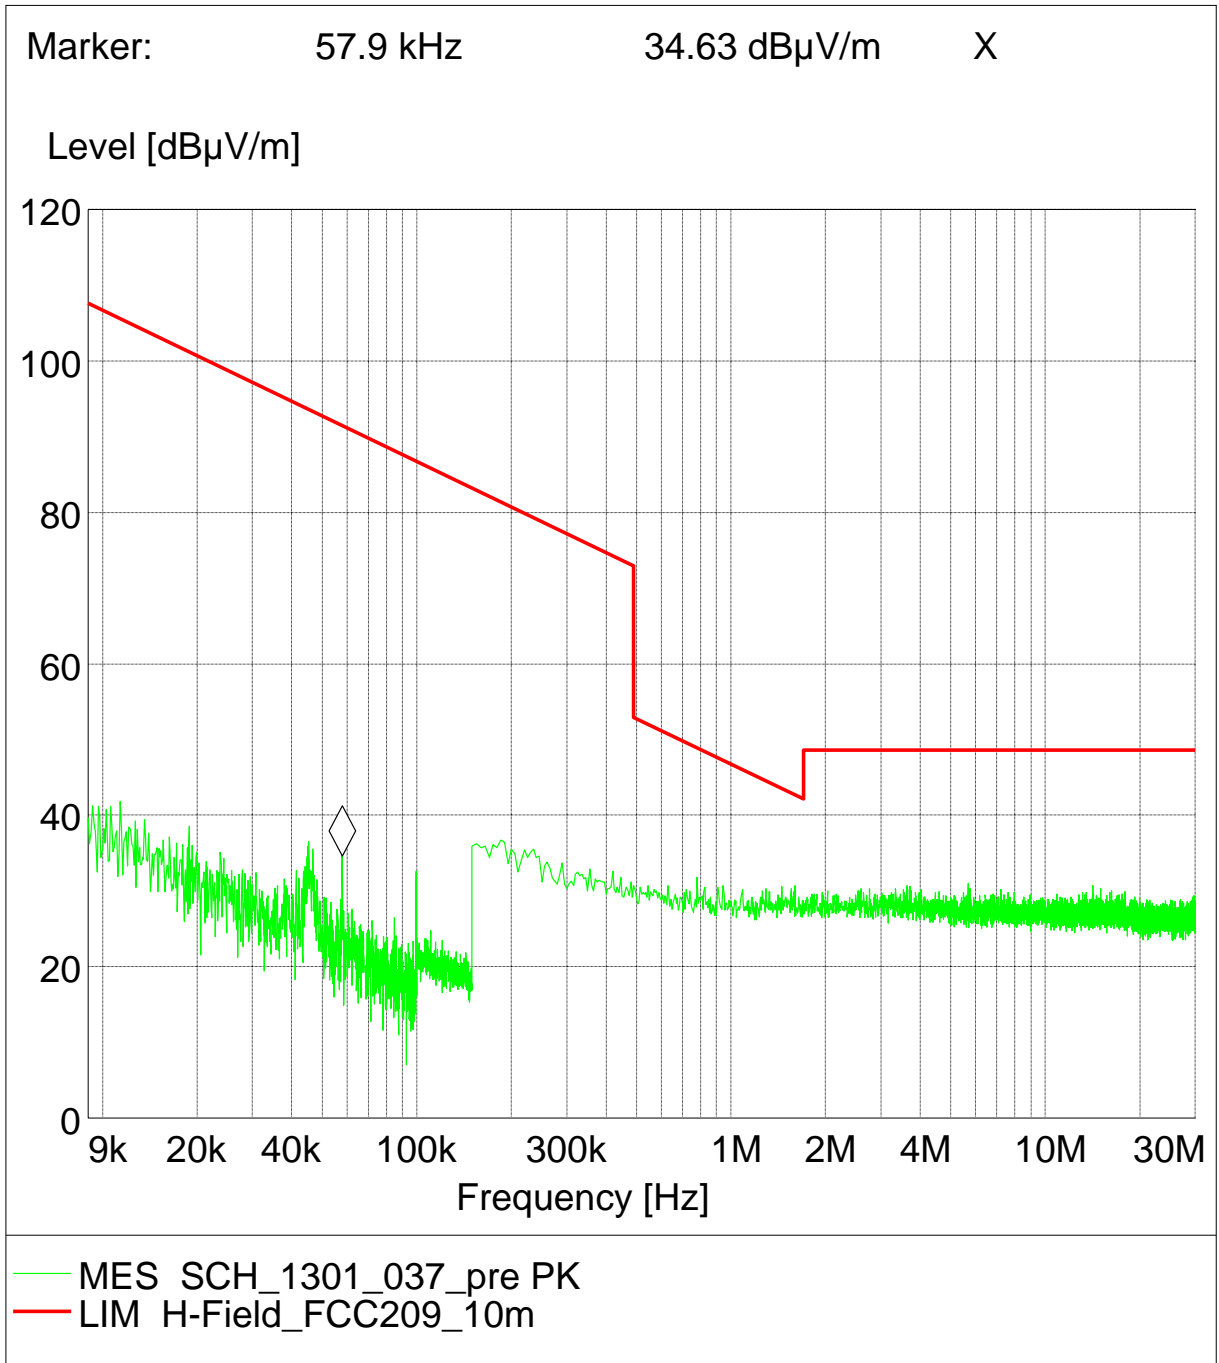


8.2.2 Spurious radiated emissions for 30 MHz < f < 1 GHz

worst case plot

channel 14 - values are not corrected by duty cycle correction factor

SCAN TABLE: "FCC 15.231 C F433MHz"


Short Description:		Field Strength				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
30.0 MHz	1.0 GHz	60.0 kHz	MaxPeak	1.0 ms	120 kHz	HL562

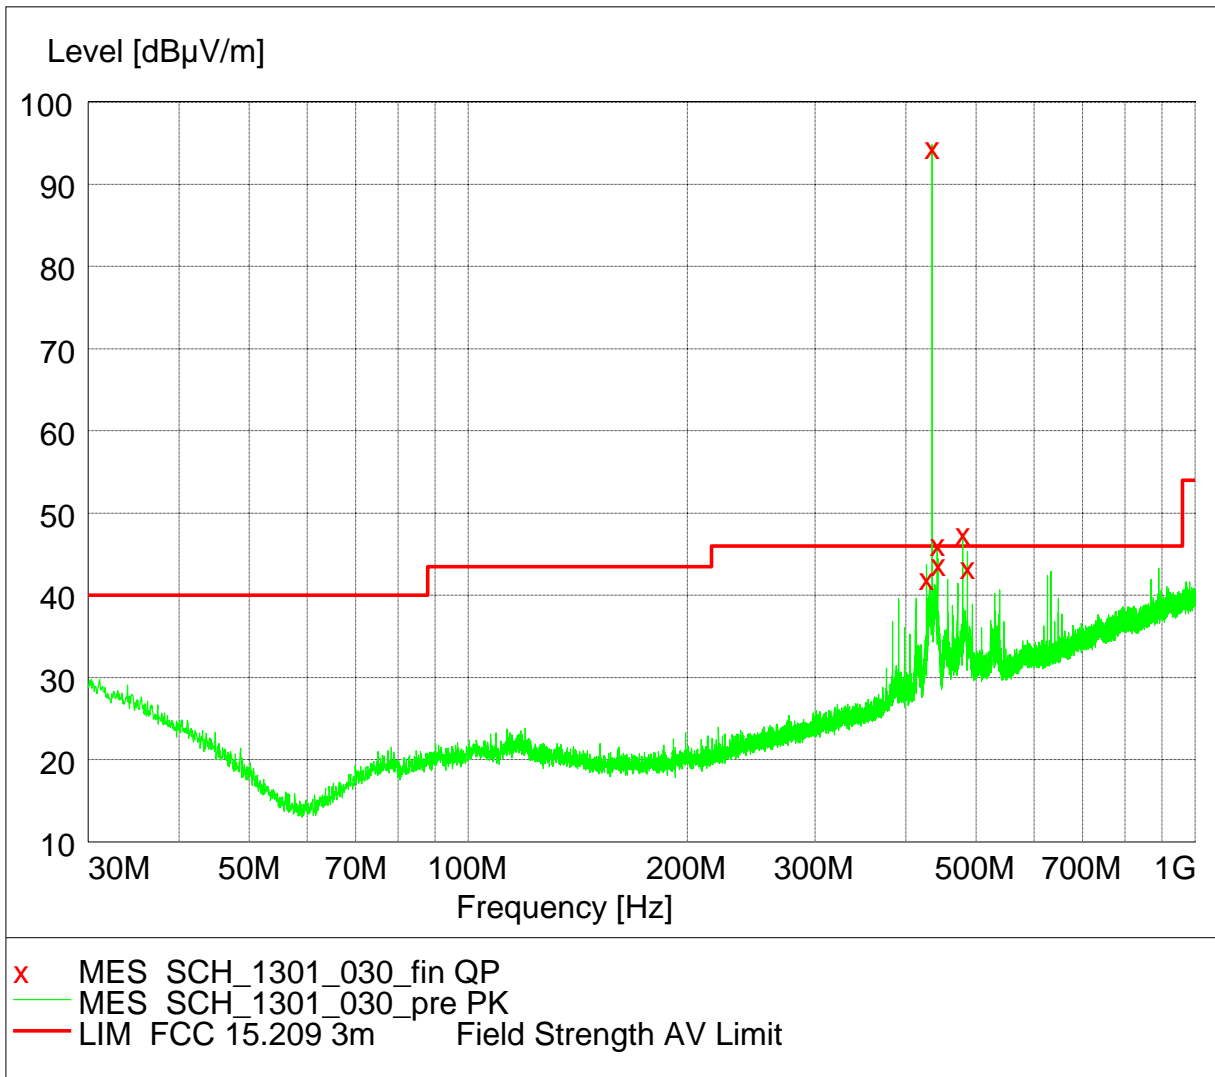

8.2.3 Spurious radiated emissions for 1 GHz < f < 4.5 GHz

worst case plot

channel 14 - values are not corrected by duty cycle correction factor

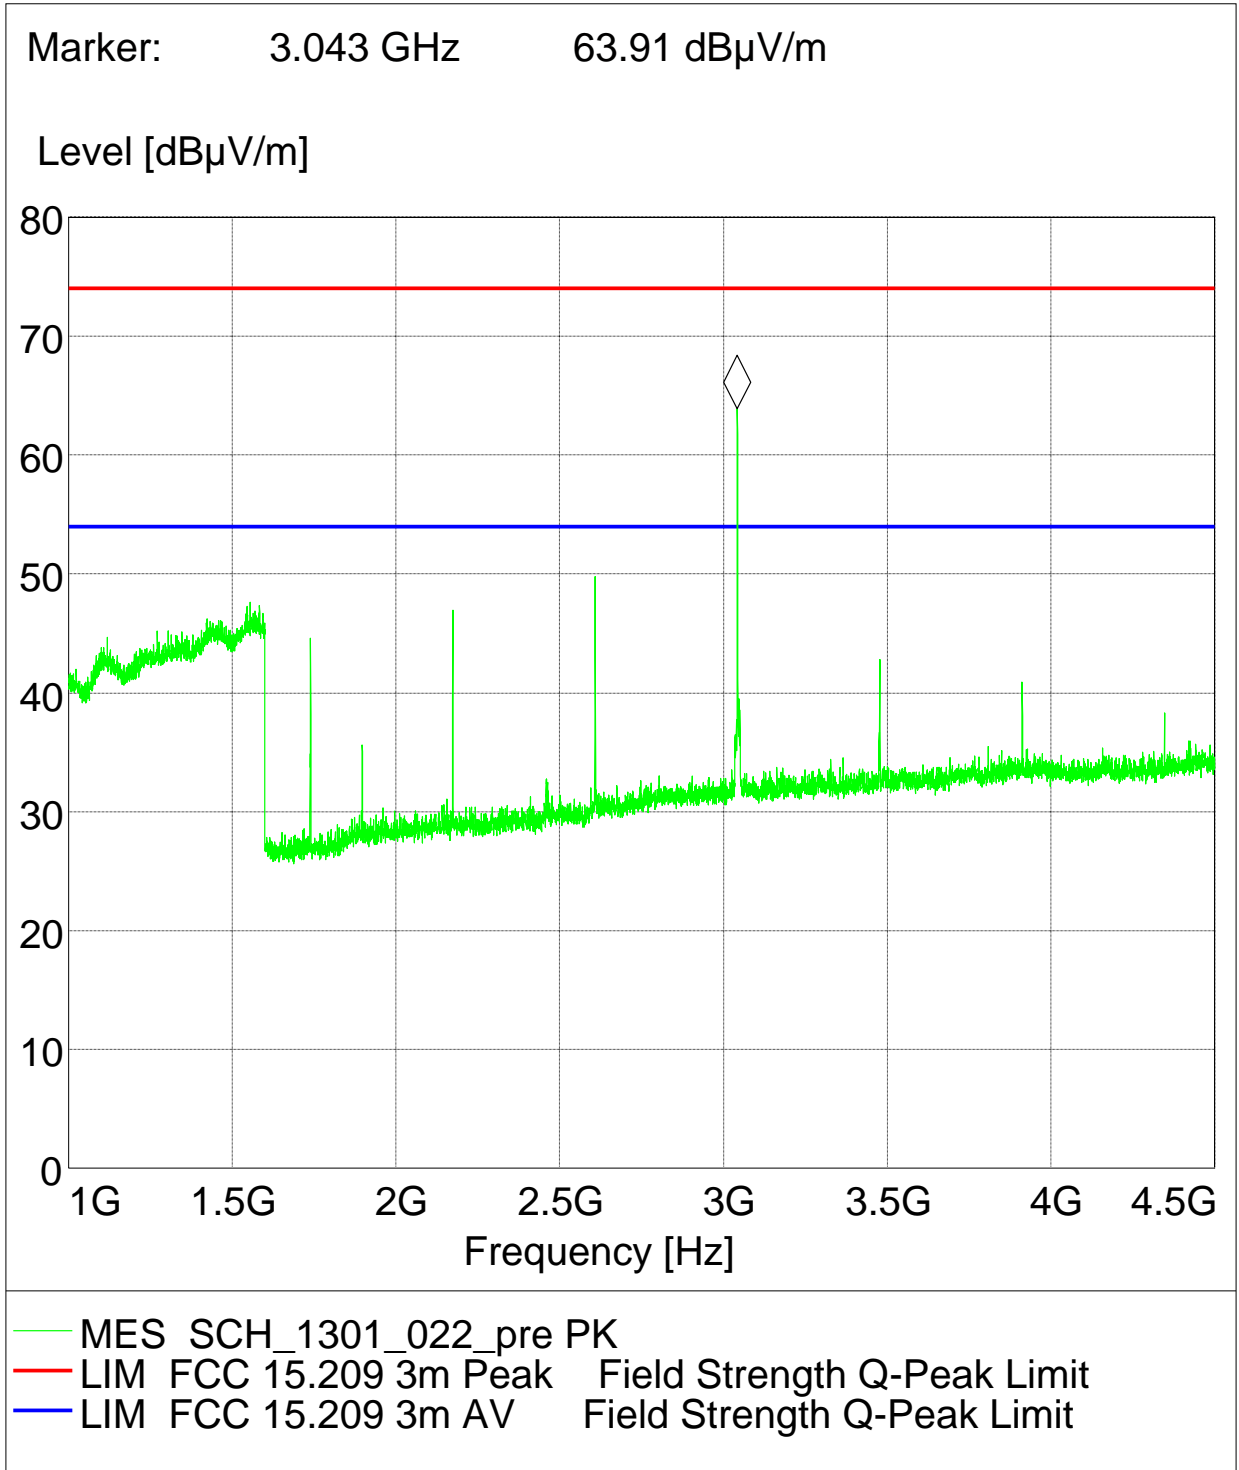




8.3 Occupied bandwidth


8.3.1 Occupied bandwidth operating mode 1

20 dB Occupied bandwidth channel 1

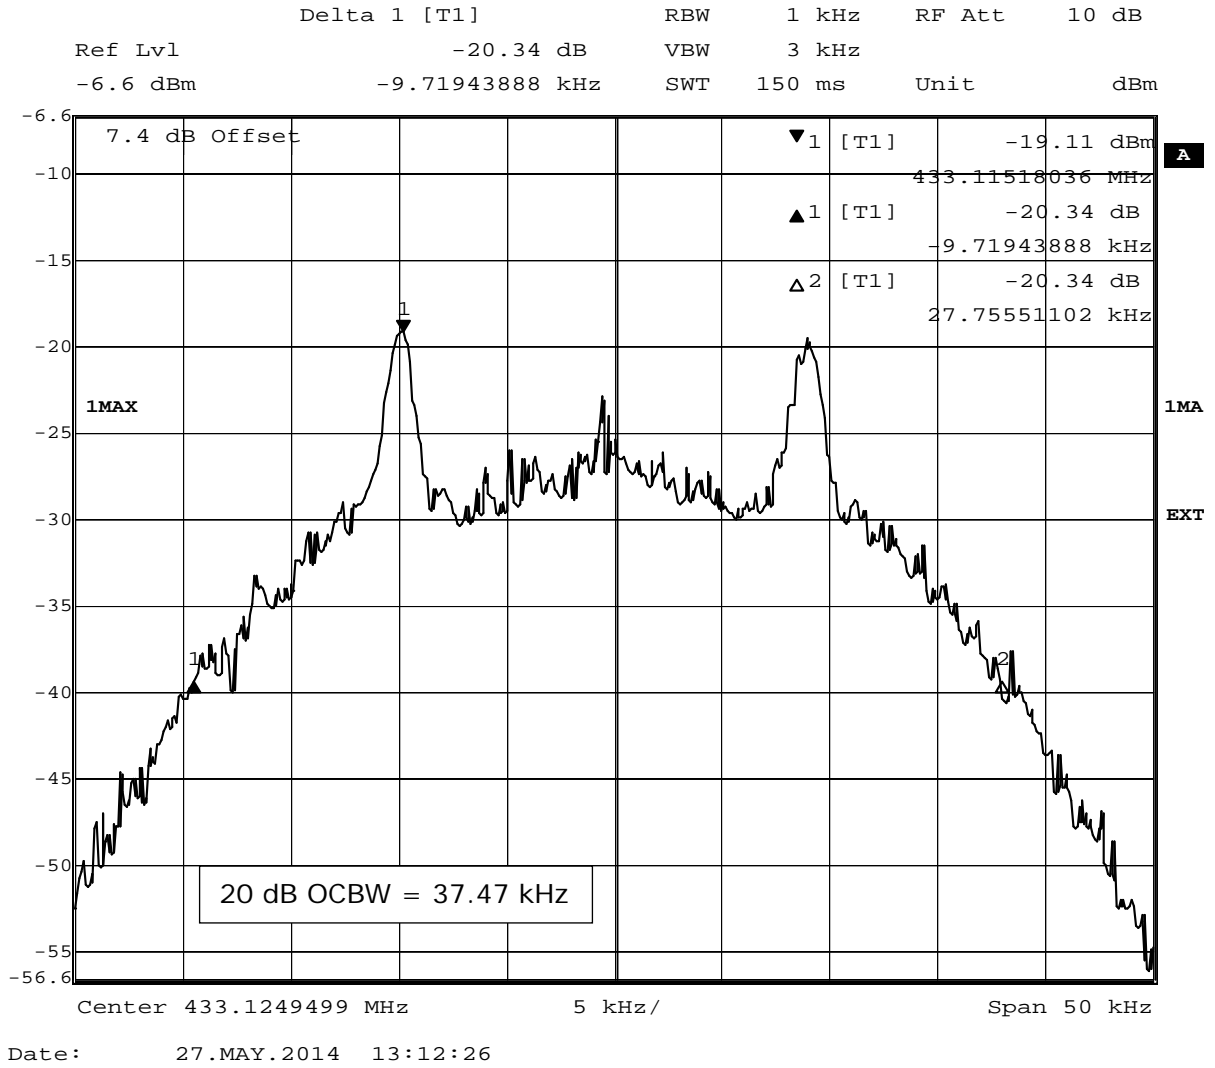




20 dB Occupied bandwidth channel 14

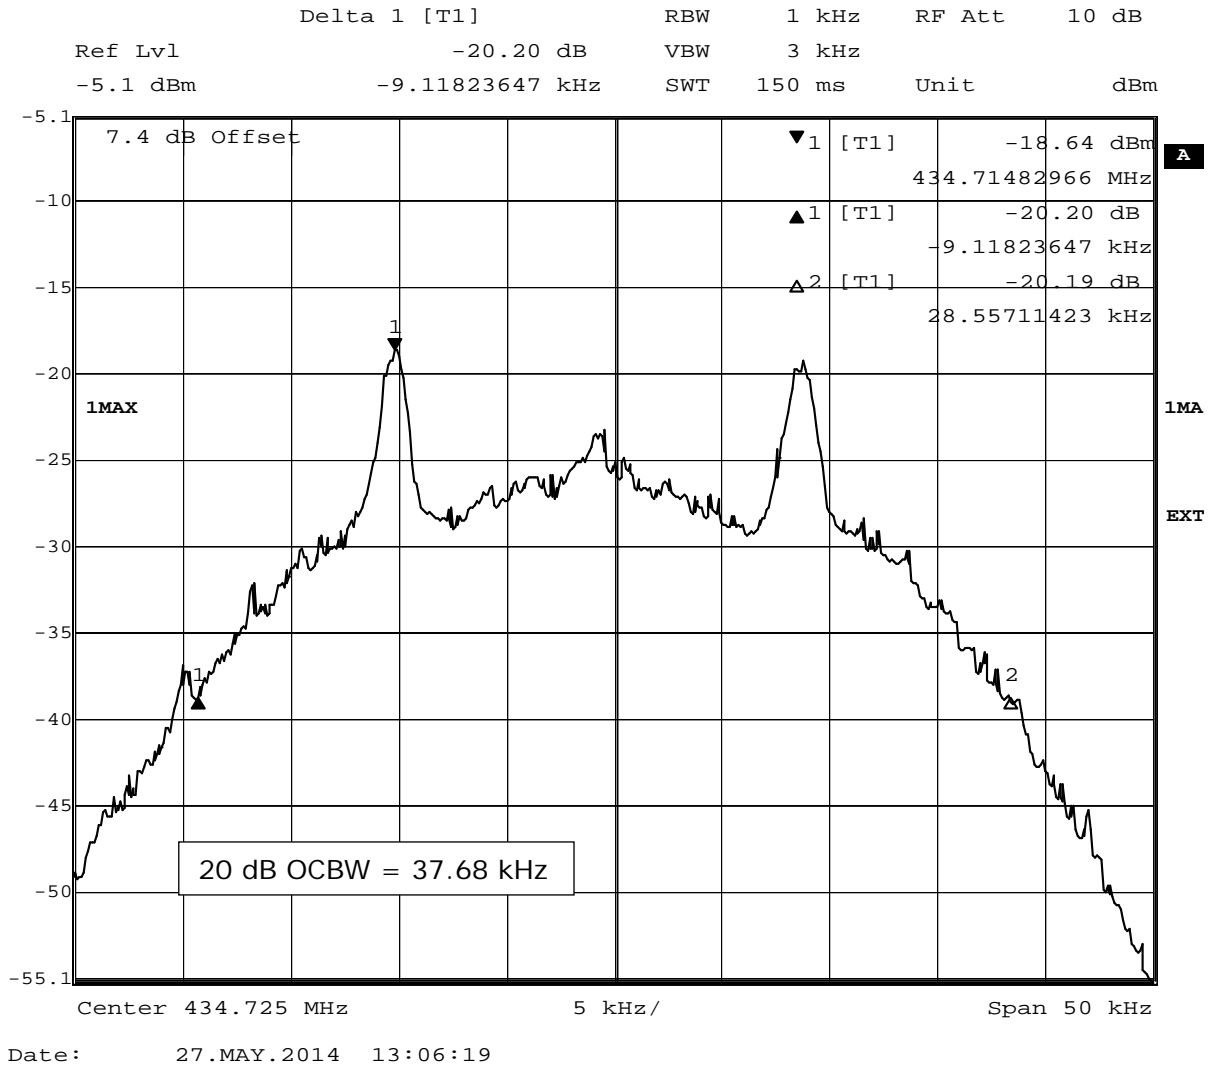



99% occupied bandwidth channel 1

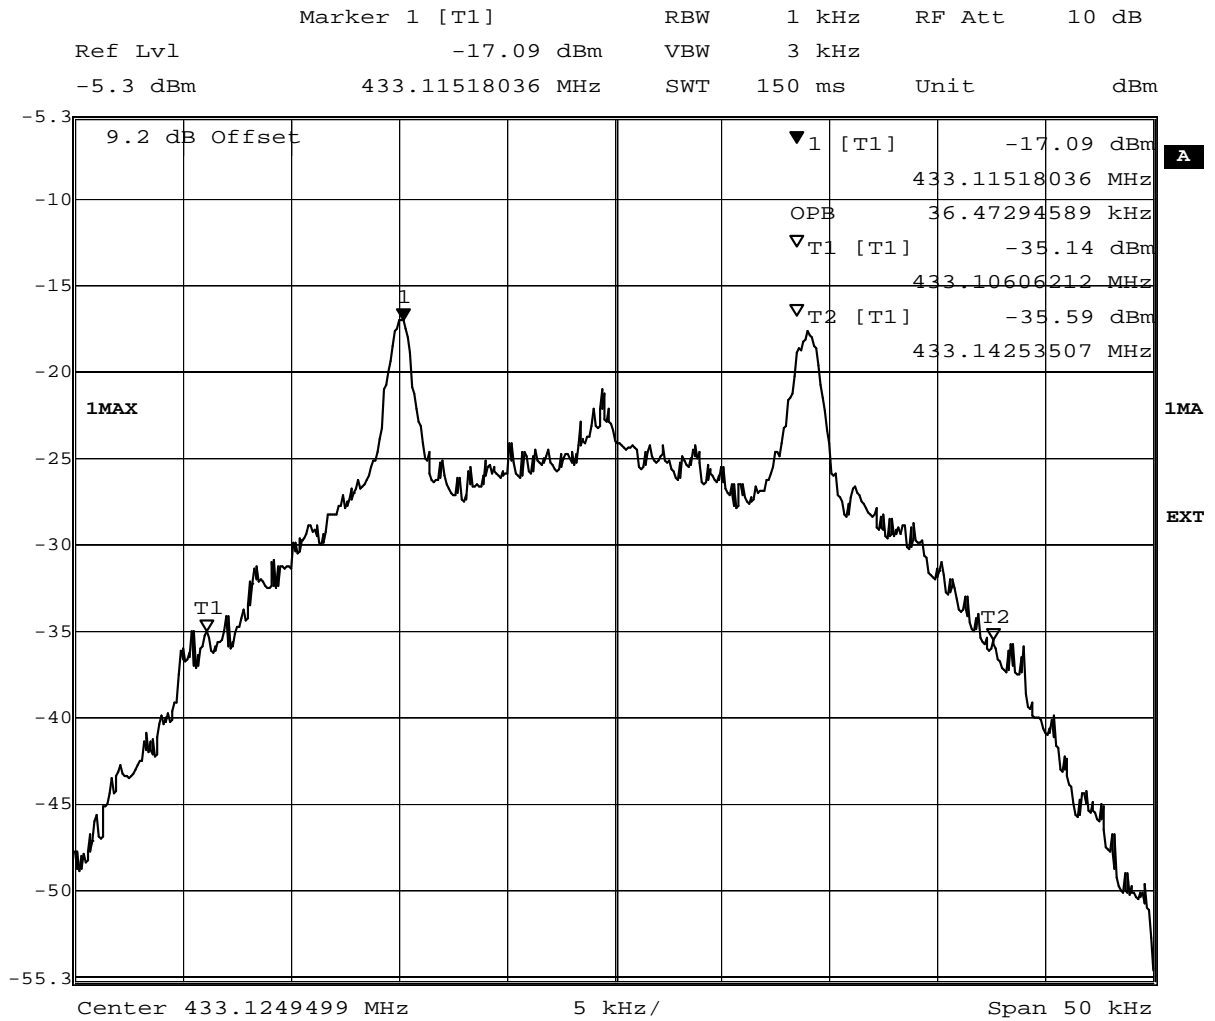

Date: 27.MAY.2014 13:14:52



99% Occupied bandwidth channel 14

