


## FCC PART 15B, CLASS B TEST REPORT

For

### Playday Manufacturers Group Ltd

Room 245, 2/F, Houston Centre, 63 Mody Road, TST East, Kowloon, Hong Kong

**FCC ID: 2AB69-49R17**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Radio control vehicle-49MHz – Receiver(Car)
<b>Report Number:</b> RSZ170619832-00	
<b>Report Date:</b> 2017-07-20	
Hill He 	
<b>Reviewed By:</b>	EMC Engineer
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY .....	3
TEST FACILITY .....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION .....	5
EUT EXERCISE SOFTWARE .....	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS .....	5
SUPPORT EQUIPMENT LIST AND DETAILS .....	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP .....	6
<b>SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>8</b>
<b>FCC §15.109 - RADIATED SPURIOUS EMISSIONS .....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
EUT SETUP .....	9
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE .....	9
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	10
TEST RESULTS SUMMARY .....	10
TEST DATA .....	10

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The *Playday Manufacturers Group Ltd*'s product, model number: 19580 (FCC ID: 2AB69-49R17) or the "EUT" in this report was a *Radio control vehicle-49MHz –Receiver(Car)*, which was measured approximately: 34.0 cm (L) × 13.5 cm (W) × 11.0 cm (H), rated with input voltage: DC 1.5 V\*6 Battery. The highest operational frequency is 49 MHz.

*\*All measurement and test data in this report was gathered from production sample serial number: 20170619 (Assigned by BACL, Shenzhen).The EUT supplied by the applicant was received on 2017-06-19.*

### Objective

This test report is prepared on behalf of *Playday Manufacturers Group Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A, B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15 B.

### Related Submittal(s)/Grant(s)

FCC PART 15.235 DSR submissions with FCC ID: 2AB69-49T17.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will be taken into consideration for the test data recorded in the report

Item			Expanded Measurement uncertainty
AC Power Line Conducted Disturbance			2.20 dB (k=2, 95% level of confidence)
Radiated Disturbance	30MHz~200MHz	Horizontal	4.58 dB (k=2, 95% level of confidence)
		Vertical	4.59 dB (k=2, 95% level of confidence)
	200MHz~1 GHz	Horizontal	4.83 dB (k=2, 95% level of confidence)
		Vertical	5.85 dB (k=2, 95% level of confidence)

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

Bay Area Compliance Laboratories Corp. (Shenzhen) has been accredited to ISO/IEC 17025 by CNAS(Lab code: L2408). And accredited to ISO/IEC 17025 by NVLAP(Lab code: 200707-0), the FCC Designation No. CN5001 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Shenzhen) was registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in a manufacturer testing fashion.

### EUT Exercise Software

No exercise software was used.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.


### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

### External I/O Cable

Cable Description	Length (m)	From/Port	To
/	/	/	/

### Block Diagram of Test Setup

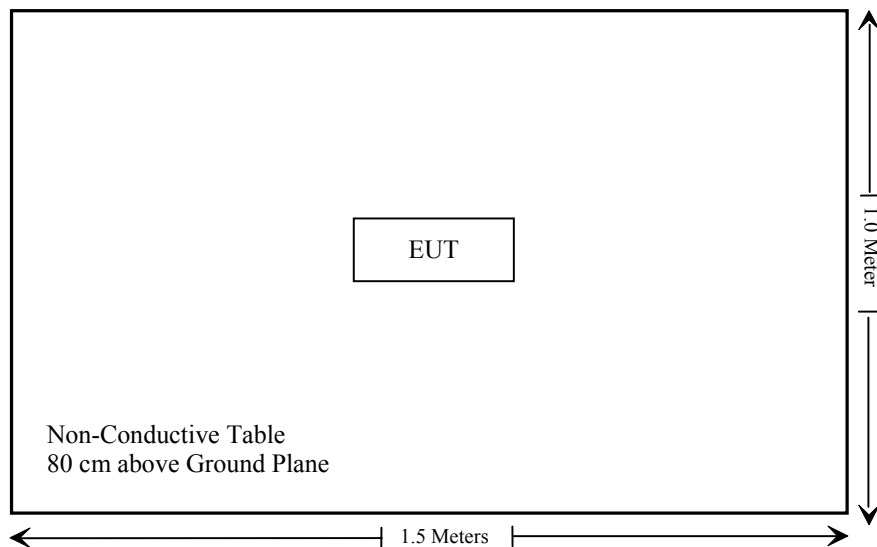

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Not Applicable*
§15.109	Radiated Spurious Emissions	Compliance

Not Applicable\*: EUT is powered by battery

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMI					
HP	Amplifier	HP8447E	1937A01046	2017-05-12	2017-11-13
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2016-12-07	2017-12-07
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-17	2017-12-17
Rohde & Schwarz	Auto test Software	EMC32	V9.10	NCR	NCR

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI)




## FCC §15.109 - RADIATED SPURIOUS EMISSIONS

### Applicable Standard

FCC §15.109

### EUT Setup

Below 1GHz:

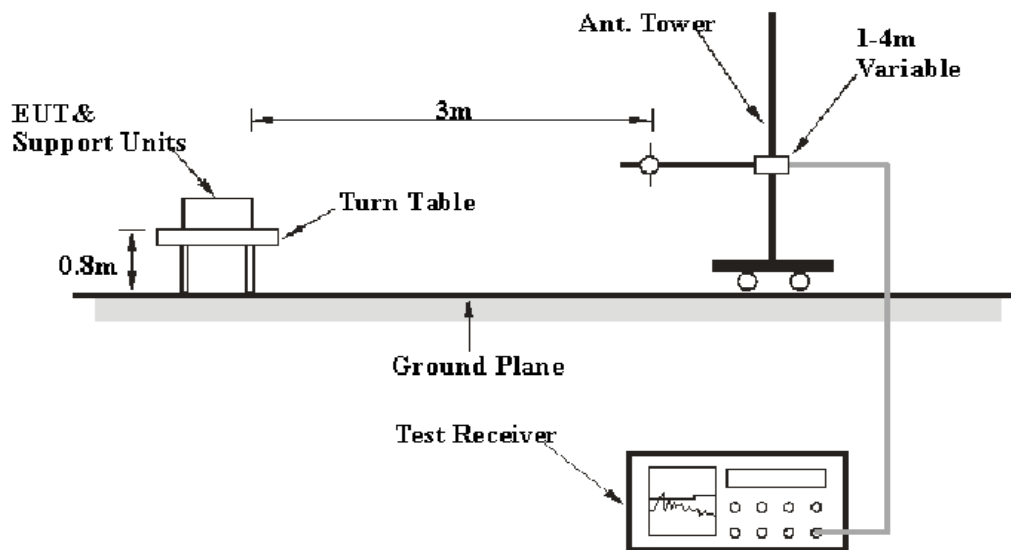

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The system was investigated from 30 MHz to 1000 MHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP

### Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz.

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109 Class B,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL,  $U_{(Lm)}$  is less than  $U_{\text{cispr}}$ , if  $L_m$  is less than  $L_{\text{lim}}$ , it implies that the EUT complies with the limit.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	54 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Joson Xiao on 2017-07-18.*

*EUT Operation Mode: Running (Receiving the operation frequency in 49MHz from the remote controller, then wheel rotating while testing)*

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.109	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
214.654500	32.29	QP	190.0	137.0	H	-12.40	19.89	43.50	23.61
353.701000	38.36	QP	194.0	111.0	H	-9.46	28.90	46.00	17.10
453.509875	31.48	QP	320.0	246.0	H	-7.21	24.27	46.00	21.73
515.435625	31.92	QP	263.0	400.0	V	-5.36	26.56	46.00	19.44
674.896625	32.21	QP	22.0	105.0	V	-3.74	28.47	46.00	17.53
730.218625	32.66	QP	340.0	108.0	V	-2.45	30.21	46.00	15.79

**Note:**

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor(RX)+cable loss - amplifier factor

Margin = Limit- Corr. Amplitude

All signals exceeding 20 microvolts/meter at 3 meters have been recorded.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***