


General Specifications




Frequency Range	5925 – 7125 MHz
Gain	2.4 dBi
V.S.W.R	≤ 2.0
Radiation	Omni Direction
Polarization	Vertical
Impedance	50 Ω
Connector	RP-SMA Female
Dimensions	108.5 x Ø8 mm
Weight	7 g
Operating Temperature	-40 °C to 70 °C

RF Specifications


Frequency (MHz)	Gain (dBi)
5925	2.08
6500	2.05
7125	2.40

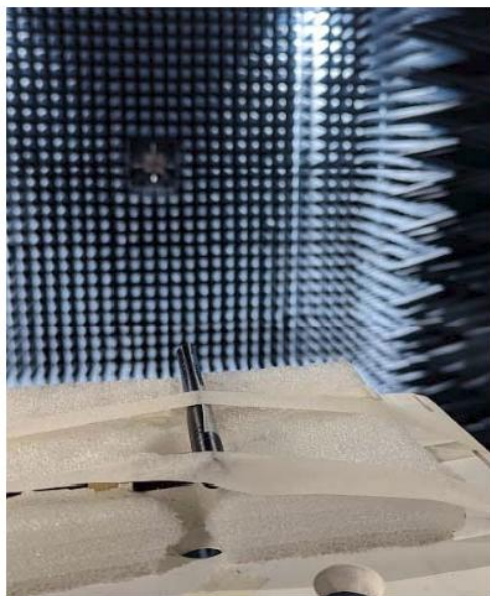

5925MHz

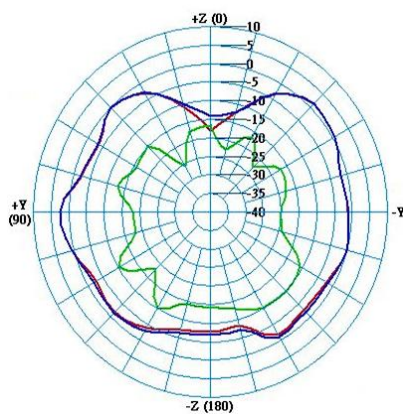

6500 MHz

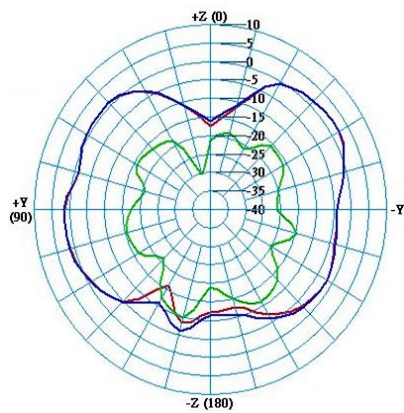

7125 MHz

