




CINCH Systems

Temp Sensor

FCC 15.231:2017

Low Power Transmitter

Report # CINC0008.5

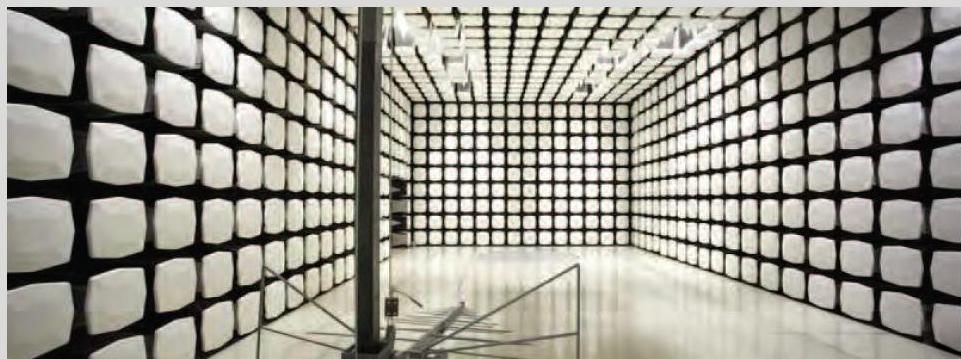

NVLAP Lab Code: 200881-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report shall not be reproduced, except in full without written approval of the laboratory.

CERTIFICATE OF TEST



2017-1-25

Last Date of Test: June 9, 2017
CINCH Systems
Model: Temp Sensor

Radio Equipment Testing

Standards

Specification	Method
FCC 15.231:2017	ANSI C63.10:2013

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	AC - Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
6.5, 6.6	Field Strength of Fundamental	Yes	Pass	
6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	
6.9.2	Occupied Bandwidth	Yes	Pass	
7.5	Duty Cycle	Yes	Pass	

Deviations From Test Standards

None

Approved By:

A handwritten signature in blue ink, appearing to read 'Matt Nuernberg'.

Matt Nuernberg, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY



Revision Number	Description	Date	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIP / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:


<http://portlandcustomer.element.com/ts/scope/scope.htm>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

FACILITIES



California Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-08, MN10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Oregon Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code: 201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada					
2834B-1, 2834B-3	2834E-1	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157

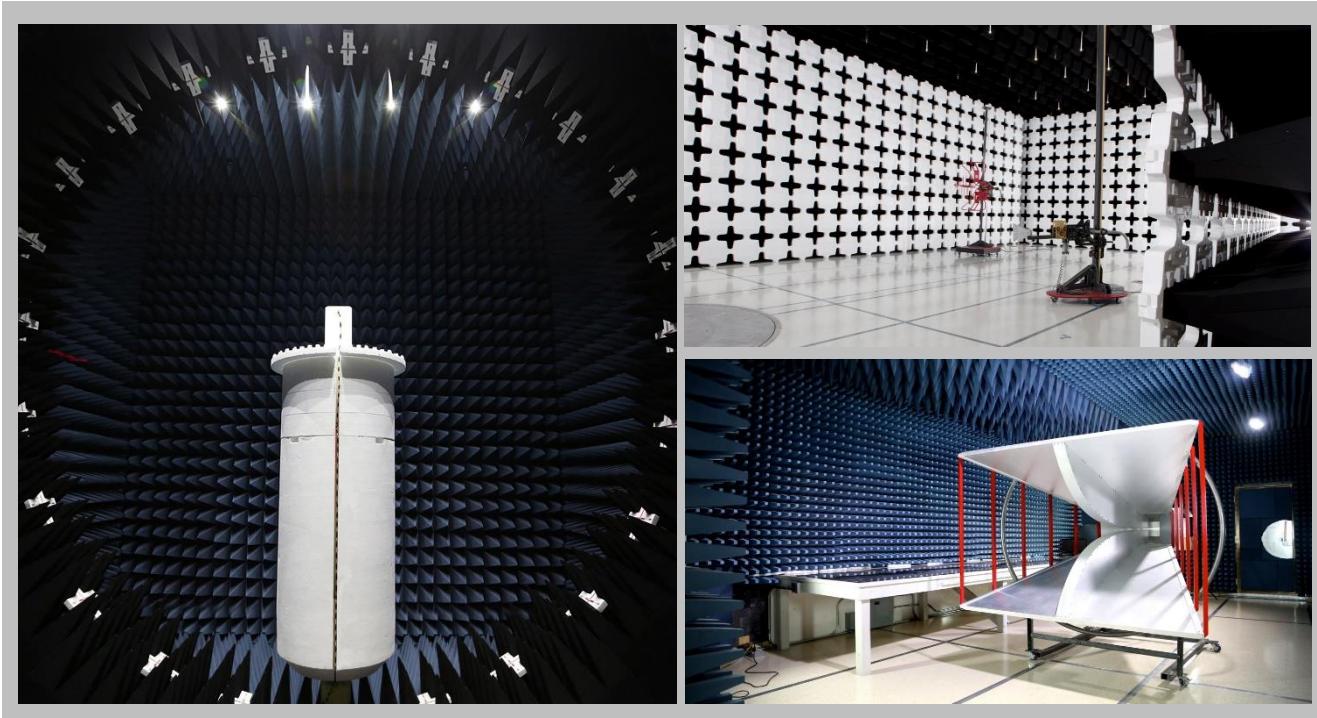

MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.


A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

<u>Test</u>	<u>+ MU</u>	<u>- MU</u>
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

Test Setup Block Diagrams


Antenna Port Conducted Measurements

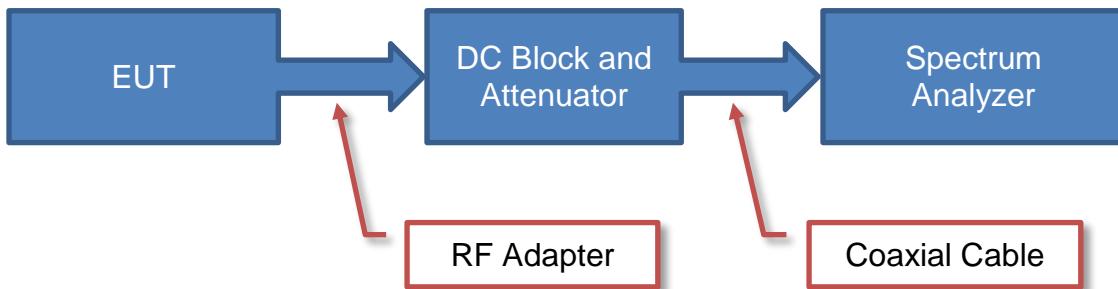

Near Field Test Fixture Measurements



Spurious Radiated Emissions

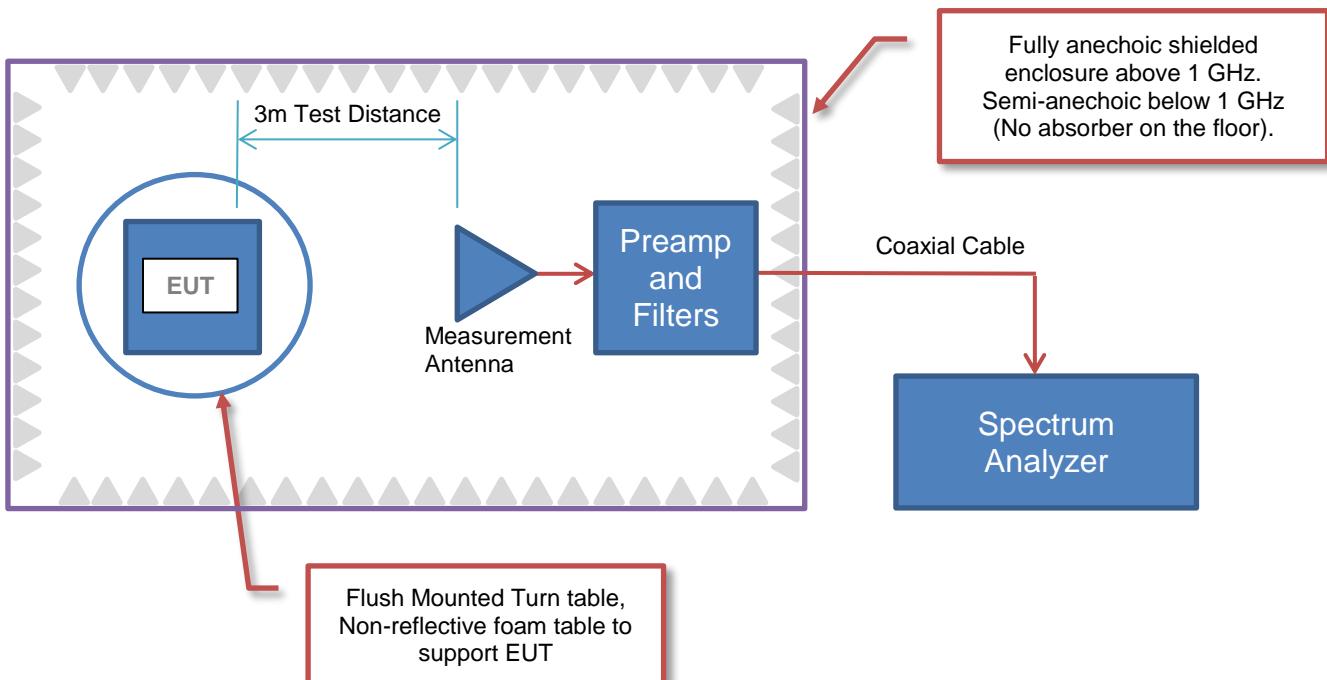

PRODUCT DESCRIPTION



Client and Equipment Under Test (EUT) Information

Company Name:	CINCH Systems
Address:	Suite 300 12075 43rd Street NE
City, State, Zip:	St. Michael, MN 55376
Test Requested By:	Jibril Aga
Model:	Temp Sensor
First Date of Test:	June 7, 2017
Last Date of Test:	June 9, 2017
Receipt Date of Samples:	June 7, 2017
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:

Temperature sensor containing a low power transmitter which operates at 319.5 MHz utilizing AM modulation (OOK)

Testing Objective:

To demonstrate compliance of the periodic radio to FCC 15.231(b) requirements.



CONFIGURATIONS

Configuration CINC0008- 3

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Temp (Normal)	CINCH Systems Inc.	QS5515-840	7F6EA2

Configuration CINC0008- 7

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Temp (CW)	CINCH Systems Inc.	QS5515-840	H:7602A6

MODIFICATIONS



2017-1-25

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	6/7/2017	Field Strength of Fundamental	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	6/8/2017	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	6/9/2017	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	6/9/2017	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

FIELD STRENGTH OF FUNDAMENTAL



PSA-ESCI 2017.01.26

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting at 319.5MHz

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

CINC0008 - 7

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	1000 MHz
-----------------	--------	----------------	----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	1/6/2017	12 mo
Cable	ESM Cable Corp.	Bilog Cables	MNH	12/1/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AVO	12/1/2016	12 mo
Antenna - Biconilog	Teseq	CBL 6141B	AYD	1/6/2016	24 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

TEST DESCRIPTION

The measurement was made in a radiated configuration of the fundamental with the carrier fully maximized for its highest radiated power. For software controlled or pre-programmed devices, the manufacturer shall declare the duty cycle class or classes for the equipment under test. For manually operated or event dependant devices, with or without software controlled functions, the manufacturer shall declare whether the device once triggered, follows a pre-programmed cycle, or whether the transmission is constant until the trigger is released or manually reset. The manufacturer shall also give a description of the application for the device and include a typical usage pattern. The typical usage pattern as declared by the manufacturer shall be used to determine the duty cycle and hence the duty class.

Where an acknowledgement is required, the additional transmitter on-time shall be included and declared by the manufacturer.

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = $N1L1 + N2L2 + \dots$

Where $N1$ is the number of type 1 pulses, $L1$ is length of type 1 pulses, $N2$ is the number of type 2 pulses, $L2$ is the length of type 2 pulses, etc.

Therefore, Duty Cycle = $(N1L1 + N2L2 + \dots)/100mS$ or T , whichever is less. (Where T is the period of the pulse train.)

The measured values for the EUT's pulse train are as follows:

Period = 100 mSec

Pulsewidth of Type 1 Pulse = 106 uSec

Pulsewidth of Type 2 Pulse = 446 uSec

Number of Type 1 Pulses = 59

Number of Type 2 Pulses = 1

Duty Cycle = $20 \log [((59)(.106) + (1)(.446))/100] = -23.47 \text{ dB}$

The duty cycle correction factor of -23.47dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz.

FIELD STRENGTH OF FUNDAMENTAL




EmiR5 2017.01.25

PSA-ESCI 2017.01.26

Work Order:	CINC0008	Date:	06/07/17	
Project:	None	Temperature:	23 °C	
Job Site:	MN05	Humidity:	44.1% RH	
Serial Number:	H:7602A6	Barometric Pres.:	1020 mbar	
EUT:	Temp Sensor			
Configuration:	7			
Customer:	CINCH Systems			
Attendees:	Jibril Aga			
EUT Power:	Battery			
Operating Mode:	Transmitting at 319.5MHz			
Deviations:	None			
Comments:	None			

Test Specifications	Test Method
FCC 15.231:2017	ANSI C63.10:2013

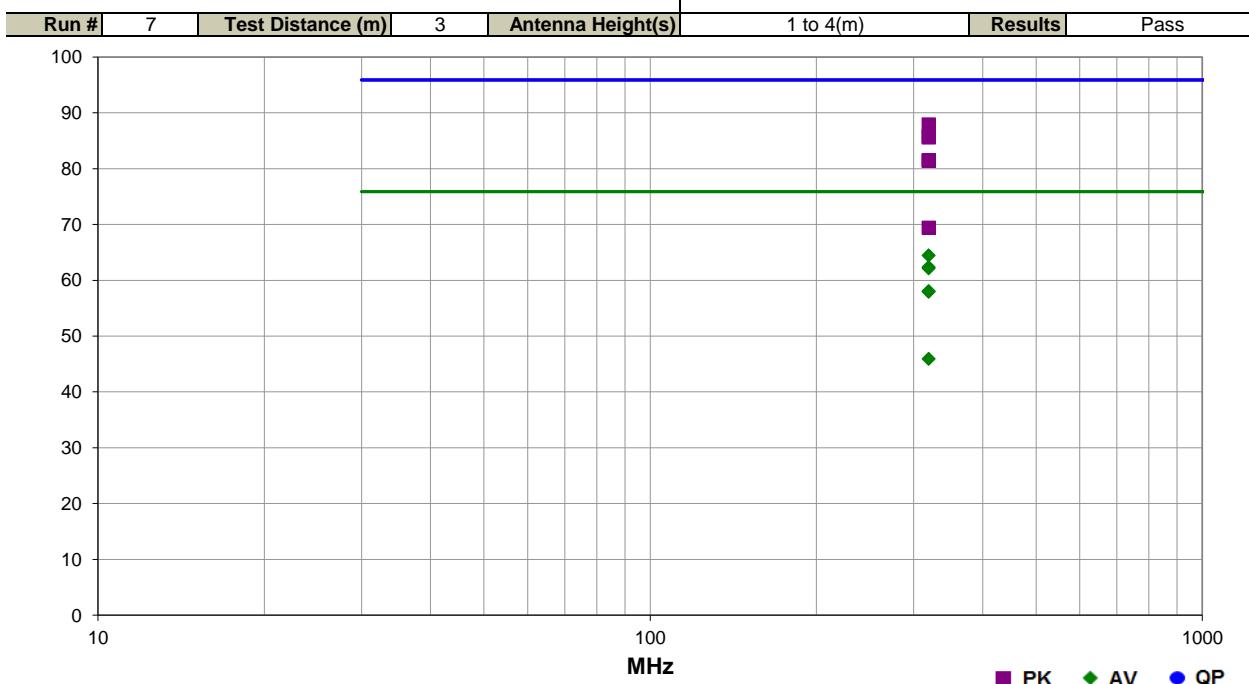

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
319.510	68.0	19.9	1.0	92.0		0.0	Horz	PK	0.0	87.9	95.9	-8.0	EUT Horz, CW
319.510	65.9	19.9	1.8	155.1		0.0	Vert	PK	0.0	85.8	95.9	-10.1	EUT On Side, CW
319.510	65.7	19.9	1.8	152.1		0.0	Vert	PK	0.0	85.6	95.9	-10.3	EUT Vert, CW
319.510	68.0	19.9	1.0	92.0	-23.5	0.0	Horz	AV	0.0	64.4	75.9	-11.5	EUT Horz, CW
319.510	65.9	19.9	1.8	155.1	-23.5	0.0	Vert	AV	0.0	62.3	75.9	-13.6	EUT On Side, CW
319.510	65.7	19.9	1.8	152.1	-23.5	0.0	Vert	AV	0.0	62.1	75.9	-13.8	EUT Vert, CW
319.510	61.6	19.9	2.4	228.1		0.0	Horz	PK	0.0	81.5	95.9	-14.4	EUT Vert, CW
319.510	61.5	19.9	2.2	227.2		0.0	Horz	PK	0.0	81.4	95.9	-14.5	EUT On Side, CW
319.510	61.6	19.9	2.4	228.1	-23.5	0.0	Horz	AV	0.0	58.0	75.9	-17.9	EUT Vert, CW
319.510	61.5	19.9	2.2	227.2	-23.5	0.0	Horz	AV	0.0	57.9	75.9	-18.0	EUT On Side, CW
319.510	49.5	19.9	2.7	253.9		0.0	Vert	PK	0.0	69.4	95.9	-26.5	EUT Horz, CW
319.510	49.5	19.9	2.7	253.9	-23.5	0.0	Vert	AV	0.0	45.9	75.9	-30.0	EUT Horz, CW

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2017.01.26

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting at 319.5MHz

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

CINC0008 - 7

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	6000 MHz
-----------------	--------	----------------	----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	1/6/2017	12 mo
Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	12/1/2016	12 mo
Cable	ESM Cable Corp.	Bilog Cables	MNH	12/1/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	2/14/2017	12 mo
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AVO	12/1/2016	12 mo
Antenna - Double Ridge	ETS Lindgren	3115	AJA	6/23/2016	24 mo
Antenna - Biconilog	Teseq	CBL 6141B	AYD	1/6/2016	24 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequency in each operational band and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = $N1L1 + N2L2 + \dots$

Where $N1$ is the number of type 1 pulses, $L1$ is length of type 1 pulses, $N2$ is the number of type 2 pulses, $L2$ is the length of type 2 pulses, etc.

Therefore, Duty Cycle = $(N1L1 + N2L2 + \dots)/100\text{mS}$ or T , whichever is less. Where T is the period of the pulse train.

The measured values for the EUT's pulse train are as follows:

Period = 100 mSec

Pulsewidth of Type 1 Pulse = 106 uSec

Pulsewidth of Type 2 Pulse = 446 uSec

Number of Type 1 Pulses = 59

Number of Type 2 Pulses = 1

Duty Cycle = $20 \log [((59)(.106) + (1)(.446))/100] = -23.47 \text{ dB}$


The duty cycle correction factor of -23.47dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz for measurements at or below 1GHz. Above 1GHz, a resolution bandwidth of 1MHz and a video bandwidth of 3MHz was used.

SPURIOUS RADIATED EMISSIONS




EmiR5 2017.01.25

PSA-ESCI 2017.01.26

Work Order:	CINC0008	Date:	06/08/17	
Project:	None	Temperature:	23.1 °C	
Job Site:	MN05	Humidity:	50.9% RH	
Serial Number:	H:7602A6	Barometric Pres.:	1012 mbar	
EUT:	Temp Sensor	Tested by:	Trevor Buls, Chris Patterson	
Configuration:	7			
Customer:	CINCH Systems			
Attendees:	Jibril Aga			
EUT Power:	Battery			
Operating Mode:	Transmitting at 319.5MHz			
Deviations:	None			
Comments:	None			

Test Specifications	Test Method
FCC 15.231:2017	ANSI C63.10:2013

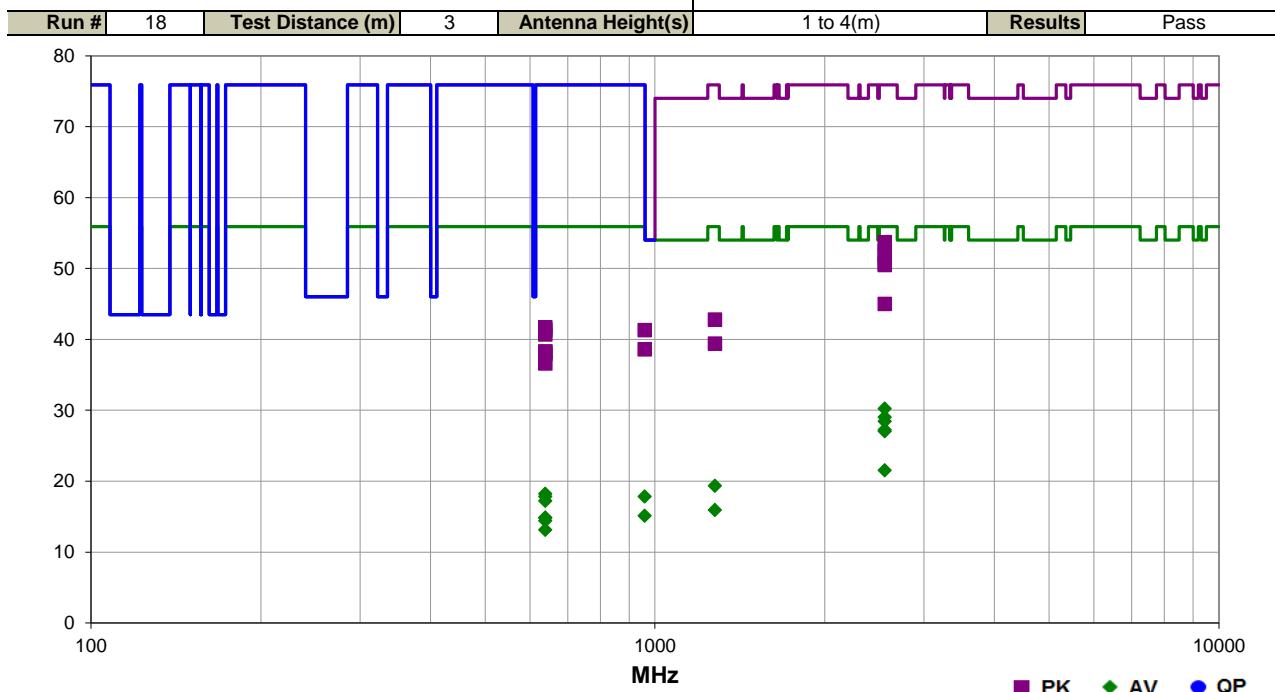

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2555.958	55.9	-2.2	1.0	18.0		0.0	Vert	PK	0.0	53.7	75.9	-22.2	EUT On Side, CW
2556.117	54.7	-2.2	1.0	24.0		0.0	Horz	PK	0.0	52.5	75.9	-23.4	EUT Vert, CW
2555.900	54.1	-2.2	1.0	347.9		0.0	Horz	PK	0.0	51.9	75.9	-24.0	EUT Horz, CW
2556.083	52.9	-2.2	1.0	200.0		0.0	Vert	PK	0.0	50.7	75.9	-25.2	EUT Vert, CW
2555.858	52.7	-2.2	1.0	216.0		0.0	Horz	PK	0.0	50.5	75.9	-25.4	EUT On Side, CW
2555.958	55.9	-2.2	1.0	18.0	-23.5	0.0	Vert	AV	0.0	30.2	55.9	-25.7	EUT On Side, CW
2556.117	54.7	-2.2	1.0	24.0	-23.5	0.0	Horz	AV	0.0	29.0	55.9	-26.9	EUT Vert, CW
2555.900	54.1	-2.2	1.0	347.9	-23.5	0.0	Horz	AV	0.0	28.4	55.9	-27.5	EUT Horz, CW
2556.083	52.9	-2.2	1.0	200.0	-23.5	0.0	Vert	AV	0.0	27.2	55.9	-28.7	EUT Vert, CW
2555.858	52.7	-2.2	1.0	216.0	-23.5	0.0	Horz	AV	0.0	27.0	55.9	-28.9	EUT On Side, CW
2556.167	47.2	-2.2	1.0	193.0		0.0	Vert	PK	0.0	45.0	75.9	-30.9	EUT Horz, CW
1277.658	49.1	-6.3	1.0	92.0		0.0	Horz	PK	0.0	42.8	75.9	-33.1	EUT Vert, CW
639.020	34.7	7.0	1.0	226.0		0.0	Vert	PK	0.0	41.7	75.9	-34.2	EUT Vert, CW
2556.167	47.2	-2.2	1.0	193.0	-23.5	0.0	Vert	AV	0.0	21.5	55.9	-34.4	EUT Horz, CW
639.010	34.3	7.0	1.3	104.0		0.0	Horz	PK	0.0	41.3	75.9	-34.6	EUT Horz, CW
958.540	28.0	13.3	1.0	250.9		0.0	Horz	PK	0.0	41.3	75.9	-34.6	EUT Horz, CW

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
639.015	33.7	7.0	1.0	283.9		0.0	Vert	PK	0.0	40.7	75.9	-35.2	EUT On Side, CW
1277.825	45.7	-6.3	1.2	101.1		0.0	Vert	PK	0.0	39.4	75.9	-36.5	EUT On Side, CW
1277.658	49.1	-6.3	1.0	92.0	-23.5	0.0	Horz	AV	0.0	19.3	55.9	-36.6	EUT Vert, CW
958.495	25.3	13.3	1.0	173.1		0.0	Vert	PK	0.0	38.6	75.9	-37.3	EUT Vert, CW
638.990	31.3	7.0	4.0	344.9		0.0	Horz	PK	0.0	38.3	75.9	-37.6	EUT On Side, CW
639.000	31.3	7.0	1.2	342.0		0.0	Horz	PK	0.0	38.3	75.9	-37.6	EUT Vert, CW
639.020	34.7	7.0	1.0	226.0	-23.5	0.0	Vert	AV	0.0	18.2	55.9	-37.7	EUT Vert, CW
639.010	30.9	7.0	1.4	306.0		0.0	Horz	PK	0.0	37.9	75.9	-38.0	EUT On Side, CW
639.010	34.3	7.0	1.3	104.0	-23.5	0.0	Horz	AV	0.0	17.8	55.9	-38.1	EUT Horz, CW
958.540	28.0	13.3	1.0	250.9	-23.5	0.0	Horz	AV	0.0	17.8	55.9	-38.1	EUT Horz, CW
639.015	33.7	7.0	1.0	283.9	-23.5	0.0	Vert	AV	0.0	17.2	55.9	-38.7	EUT On Side, CW
639.020	29.6	7.0	1.0	360.0		0.0	Vert	PK	0.0	36.6	75.9	-39.3	EUT Horz, CW
1277.825	45.7	-6.3	1.2	101.1	-23.5	0.0	Vert	AV	0.0	15.9	55.9	-40.0	EUT On Side, CW
958.495	25.3	13.3	1.0	173.1	-23.5	0.0	Vert	AV	0.0	15.1	55.9	-40.8	EUT Vert, CW
638.990	31.3	7.0	4.0	344.9	-23.5	0.0	Horz	AV	0.0	14.8	55.9	-41.1	EUT On Side, CW
639.000	31.3	7.0	1.2	342.0	-23.5	0.0	Horz	AV	0.0	14.8	55.9	-41.1	EUT Vert, CW
639.010	30.9	7.0	1.4	306.0	-23.5	0.0	Horz	AV	0.0	14.4	55.9	-41.5	EUT On Side, CW
639.020	29.6	7.0	1.0	360.0	-23.5	0.0	Vert	AV	0.0	13.1	55.9	-42.8	EUT Horz, CW

OCCUPIED BANDWIDTH



XMit 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	1/6/2017	1/6/2018
Antenna - Biconilog	Teseq	CBL 6141B	AYD	1/6/2016	1/6/2018
Cable	ESM Cable Corp.	Bilog Cables	MNH	12/1/2016	12/1/2017

TEST DESCRIPTION

The measurement was made in a radiated configuration of the fundamental with the carrier fully maximized for its highest radiated power. The EUT was transmitting at its maximum data rate.

The 20 dB occupied bandwidth is required to be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz.

OCCUPIED BANDWIDTH



XMIT 2017.02.08


EUT: Temp Sensor	Work Order: CINC0008			
Serial Number: 7F6EA2	Date: 06/09/17			
Customer: CINCH Systems	Temperature: 23.1 °C			
Attendees: Jibril Aga	Humidity: 50.2% RH			
Project: None	Barometric Pres.: 1011 mbar			
Tested by: Trevor Buls, Chris Patterson	Job Site: MN05			
TEST SPECIFICATIONS				
FCC 15.231:2017	Test Method: ANSI C63.10:2013			
COMMENTS				
Transmitting at 319.5MHz				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	3			
Signature: <i>Trevor Buls</i>				
		Value: 26.78	Limit: 798.8	Result: Pass
319.5MHz				

OCCUPIED BANDWIDTH



XMI 2017.02.08

319.5MHz				Value (kHz)	Limit (kHz)	Result
				26.78	798.8	Pass

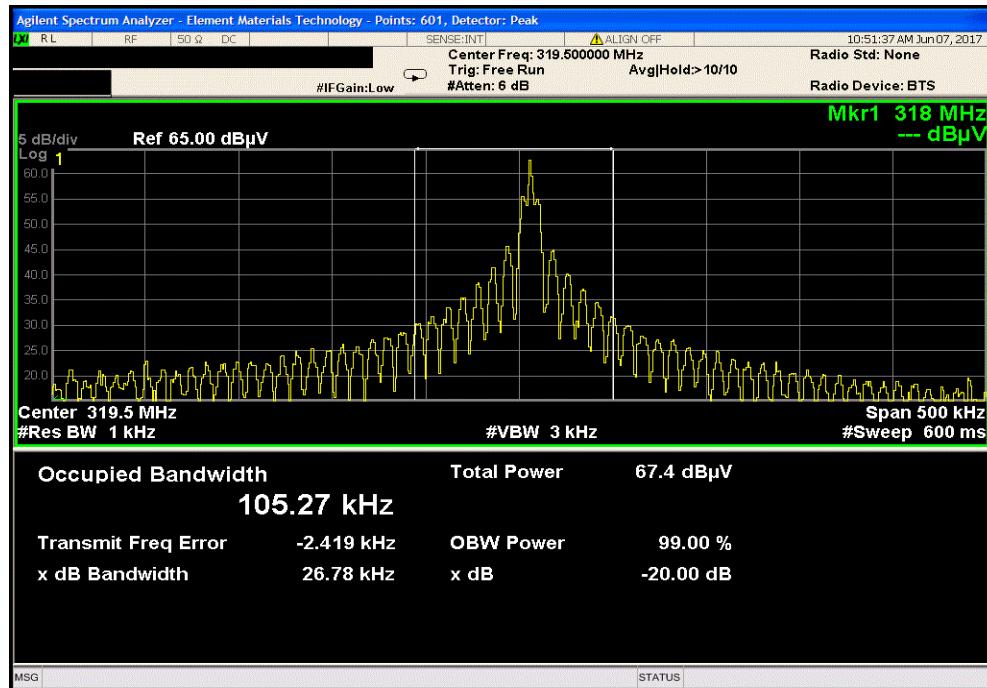

DUTY CYCLE



XMIT 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	1/6/2017	1/6/2018
Antenna - Biconilog	Teseq	CBL 6141B	AYD	1/6/2016	1/6/2018
Cable	ESM Cable Corp.	Bilog Cables	MNH	12/1/2016	12/1/2017

TEST DESCRIPTION

The measurement was made in a radiated configuration of the fundamental with the carrier fully maximized for its highest radiated power. For software controlled or pre-programmed devices, the manufacturer shall declare the duty cycle class or classes for the equipment under test. For manually operated or event dependant devices, with or without software controlled functions, the manufacturer shall declare whether the device once triggered, follows a pre-programmed cycle, or whether the transmission is constant until the trigger is released or manually reset. The manufacturer shall also give a description of the application for the device and include a typical usage pattern. The typical usage pattern as declared by the manufacturer shall be used to determine the duty cycle and hence the duty class.

Where an acknowledgement is required, the additional transmitter on-time shall be included and declared by the manufacturer.

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = $N1L1 + N2L2 + \dots$

Where $N1$ is the number of type 1 pulses, $L1$ is length of type 1 pulses, $N2$ is the number of type 2 pulses, $L2$ is the length of type 2 pulses, etc.

Therefore, Duty Cycle = $(N1L1 + N2L2 + \dots)/100\text{mS}$ or T , whichever is less. (Where T is the period of the pulse train.)

The measured values for the EUT's pulse train are as follows:

Period = 100 mSec

Pulsewidth of Type 1 Pulse = 106 uSec

Pulsewidth of Type 2 Pulse = 446 uSec

Number of Type 1 Pulses = 59

Number of Type 2 Pulses = 1

Duty Cycle = $20 \log [((59)(.106) + (1)(.446))/100] = -23.47 \text{ dB}$

The duty cycle correction factor of **-23.47dB** was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz.

DUTY CYCLE



XMI 2017.02.08


EUT: Temp Sensor	Work Order: CINC0008		
Serial Number: 7F6EA2	Date: 06/09/17		
Customer: CINCH Systems	Temperature: 23.1 °C		
Attendees: Jibril Aga	Humidity: 50.9% RH		
Project: None	Barometric Pres.: 1012 mbar		
Tested by: Trevor Buis, Chris Patterson	Job Site: MN05		
TEST SPECIFICATIONS			
FCC 15.231:2017			
Test Method			
ANSI C63.10:2013			
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature	Trevor Buis
		Value	Limit
1sec		See Test Description	N/A
10sec		See Test Description	N/A
20ms		See Test Description	N/A

DUTY CYCLE




XMit 2017.02.08

Value	Limit	Result
See Test Description	N/A	N/A

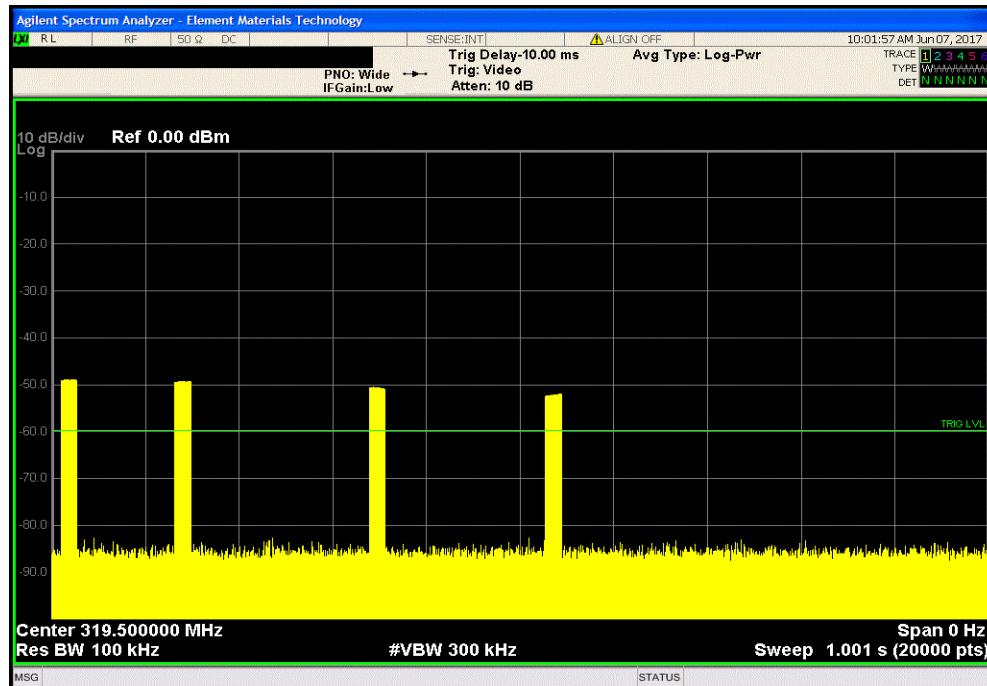

10sec					
	Value		Limit	Result	
	See Test Description		N/A	N/A	

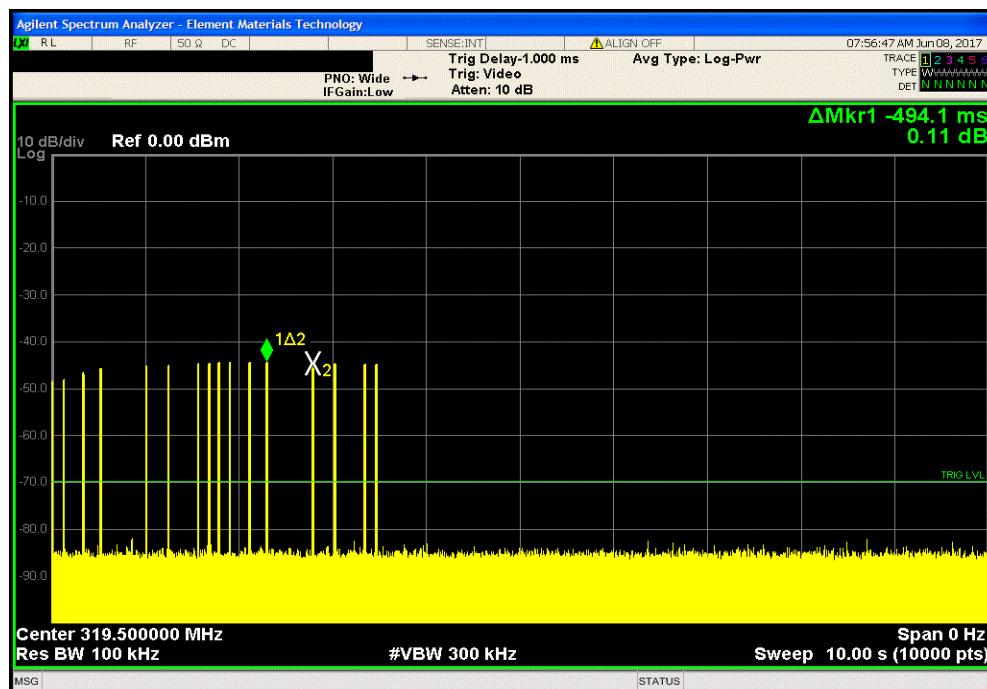

DUTY CYCLE



XMI 2017.02.08

20ms			
	Value	Limit	Result
	See Test Description	N/A	N/A

