

# COMERCIALIZADORA MILENIO SA DE CV

## POLAROID PMID705GTV

**Main Model: PMID705GTV**

**Serial Model: N/A**

**May 09, 2014**

**Report No.: 14070068-FCC-E1**

(This report supersedes NONE)



Modifications made to the product : None

This Test Report is Issued Under the Authority of:

Kahn Yang Compliance Engineer	Alex Liu Technical Manager	

This test report may be reproduced in full only.  
Test result presented in this test report is applicable to the representative sample only.

**EMC Test Report**

FCC Part 15 Subpart B Class B; 2013, ANSI C63.4; 2009

**SIEMIC, INC.**  
Addressing global markets



## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management through out a project. Our extensive experience with China, Asia Pacific, North America, European, and international compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### SIEMIC (Shenzhen-China) Laboratories Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC , RF/Wireless , Telecom
Canada	EMC, RF/Wireless , Telecom
Taiwan	EMC, RF, Telecom , Safety
Hong Kong	RF/Wireless ,Telecom
Australia	EMC, RF, Telecom , Safety
Korea	EMI, EMS, RF , Telecom, Safety
Japan	EMI, RF/Wireless, Telecom
Singapore	EMC , RF , Telecom
Europe	EMC, RF, Telecom , Safety



**SIEMIC, INC.**

*Accessing global markets*

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 3 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

---

This page has been left blank intentionally.



**SIEMIC, INC.**

*Accessing global markets*

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 4 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

# CONTENTS

<b>1</b>	<b>EXECUTIVE SUMMARY &amp; EUT INFORMATION</b>	<b>5</b>
<b>2</b>	<b>TECHNICAL DETAILS</b>	<b>6</b>
<b>3</b>	<b>MODIFICATION</b>	<b>7</b>
<b>4</b>	<b>TEST SUMMARY</b>	<b>8</b>
<b>5</b>	<b>MEASUREMENTS, EXAMINATION AND DERIVED RESULTS</b>	<b>9</b>
<b>ANNEX A. TEST INSTRUMENTATION &amp; GENERAL PROCEDURES</b>		<b>14</b>
<b>ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS</b>		<b>19</b>
<b>ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT</b>		<b>32</b>
<b>ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST</b>		<b>36</b>
<b>ANNEX E. DECLARATION OF SIMILARITY</b>		<b>37</b>



**SIEMIC, INC.**

*Accessing global markets*

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 5 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **1 EXECUTIVE SUMMARY & EUT INFORMATION**

**The purpose of this test programme was to demonstrate compliance of the COMERCIALIZADORA MILENIO SA DE CV, POLAROID PMID705GTV and Model: PMID705GTV against the current Stipulated Standards. The POLAROID PMID705GTV has demonstrated compliance with the FCC Part 15 Subpart B Class B: 2013, ANSI C63.4: 2009.**

### **EUT Information**

**EUT Description** : POLAROID PMID705GTV

**Main Model** : PMID705GTV

**Serial Model** N/A

**Antenna Gain** : UMTS-FDD Band V/GPRS850: 2 dBi  
UMTS-FDD Band II/GPRS1900: 2 dBi  
WIFI: 1.5dBi  
Bluetooth: 1.5 dBi

**Input Power** : Battery:  
Model: 3057122P  
Spec: 3.7V 2500mAh  
Limited charger voltage: 4.2V  
Adapter:  
Model: TS121X150-0502USS  
Input: 100-240V; 50/60Hz 0.45A  
Output: 5.0V; 1.5A

**Classification Per Stipulated Test Standard** : Class B Emission Product Per FCC Part 15 Subpart B Class B: 2013, ANSI C63.4: 2009

***Note:***

*The models of type A and type B, the difference is the SIM card slot. This was blocked by plastic cover. See Page 23. Details please refer to Declaration Letter.*

**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 6 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **2 TECHNICAL DETAILS**

<b>Purpose</b>	Compliance testing of POLAROID PMID705GTV with stipulated standards
<b>Applicant / Client</b>	COMERCIALIZADORA MILENIO SA DE CV Vasco de Quiroga 3900 Office 704, Mexico City 05300, Mexico
<b>Manufacturer</b>	Megatron Technology Corporation Limited Room No. 1605, Building A, T-Share Jinniu Square (T-Share International Centre), Taoyuan Road, Nanshan District, Shenzhen, Guangdong, China 518033
<b>Laboratory performing the tests</b>	SIEMIC (Shenzhen-China) Laboratories Zone A, Floor 1, Building 2, Wan Ye Long Technology Park, South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong, China Tel: +86-0755-2601 4629 / 2601 4953 Fax: +86-0755-2601 4953-810 Email: <a href="mailto:China@siemic.com.cn">China@siemic.com.cn</a>
<b>Test report reference number</b>	14070068-FCC-E1
<b>Date EUT received</b>	March 17, 2014
<b>Standard applied</b>	FCC Part 15 Subpart B Class B: 2013, ANSI C63.4: 2009
<b>Dates of test (from – to)</b>	March 17 to May 07, 2014
<b>No of Units</b>	#1
<b>Equipment Category</b>	JBC
<b>Trade Name</b>	POLAROID JET 705
<b>RF Operating Frequency (ies)</b>	GPRS850 TX : 824.2 ~ 848.8 MHz; RX : 869.2 ~ 893.8 MHz GPRS1900 TX : 1850.2 ~ 1909.8 MHz; RX : 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX : 826.4 ~ 846.6 MHz; RX : 871.4 ~ 891.6 MHz UMTS-FDD Band II TX : 1852.4 ~ 1907.6 MHz; RX : 1932.4 ~ 1987.6 MHz 802.11b/g/n: 2412~2462 MHz Bluetooth: 2402~2480 MHz
<b>Number of Channels</b>	299CH (GPRS1900) and 124CH (GPRS850) UMTS-FDD Band V: 102CH UMTS-FDD Band II : 277CH 802.11b/g/n: 11CH Bluetooth: 79CH
<b>Modulation</b>	GPRS: GMSK UMTS-FDD: QPSK 802.11b/g/n: DSSS/OFDM Bluetooth: GFSK& π/4DQPSK&8DPSK
<b>GPRS Multi-slot class</b>	N/A
<b>FCC ID</b>	2ABD2PMID705GTV



**SIEMIC, INC.**

*Accessing global markets*

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 7 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

### **3 MODIFICATION**

**NONE**

**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 8 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

## 4 TEST SUMMARY

The product was tested in accordance with the following specifications.  
All testing has been performed according to below product classification:

### Class B Emission Product

#### Test Results Summary

Emissions			
Test Standard	Description	Product Class	Pass / Fail
FCC Part 15 Subpart B Class B: 2013, ANSI C63.4: 2009	Conducted Emissions	See Above	Pass
FCC Part 15 Subpart B Class B: 2013, ANSI C63.4: 2009	Radiated Emissions	See Above	Pass

All measurement uncertainty is not taken into consideration for all presented test result.



**SIEMIC, INC.**

*Accessing global markets*

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 9 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS**

### **5.1 Conducted Emissions Test Result**

**Note:**

1. All possible modes of operation were investigated. Only the several worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. **Conducted Emissions Measurement Uncertainty**  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is  $\pm 3.86$ dB.
4. Environmental Conditions      Temperature      21°C  
    Relative Humidity      50%  
    Atmospheric Pressure      1020mbar
5. Test date : March 17, 2014  
Tested By : Kahn Yang


**Test Result: Pass**

**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 10 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

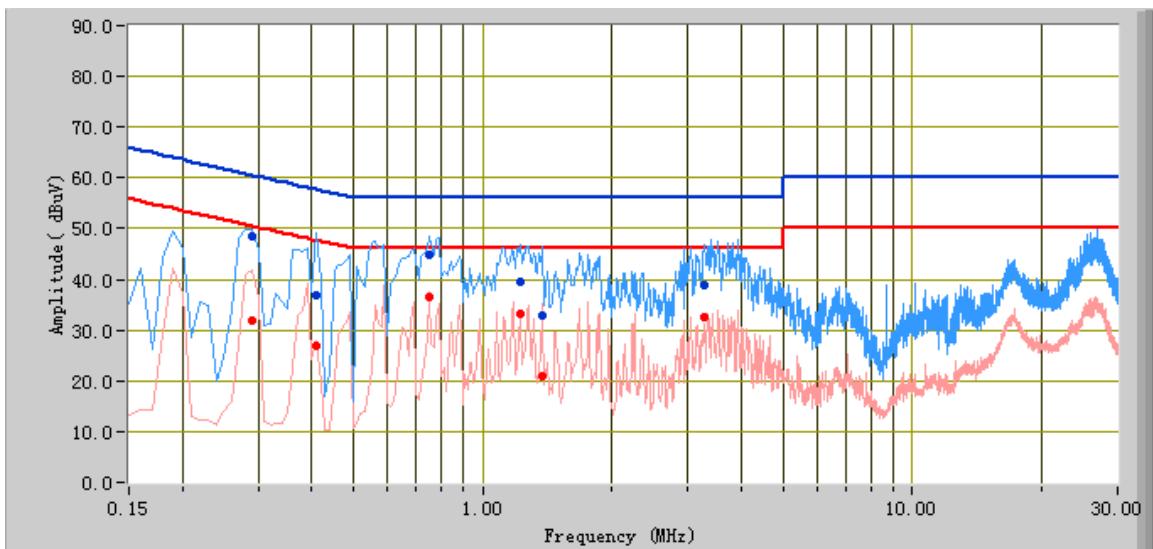**Test Mode:****Charging & Downloading****Peak Detector****Quasi Peak Limit****Average Detector****Average Limit**

## Test Data

### Phase Line Plot at 120V AC, 60Hz


Frequency (MHz)	Quasi Peak (dBuV)	Limit (dBuV)	Margin (dB)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Factors (dB)
0.75	44.85	56.00	-11.15	36.54	46.00	-9.46	10.42
0.41	36.79	57.65	-20.86	26.74	47.65	-20.91	10.96
1.22	39.65	56.00	-16.35	33.27	46.00	-12.73	10.30
3.26	38.98	56.00	-17.02	32.70	46.00	-13.30	10.67
1.38	32.78	56.00	-23.22	21.03	46.00	-24.97	10.33
0.29	48.44	60.52	-12.08	32.01	50.52	-18.51	11.57

**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 11 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

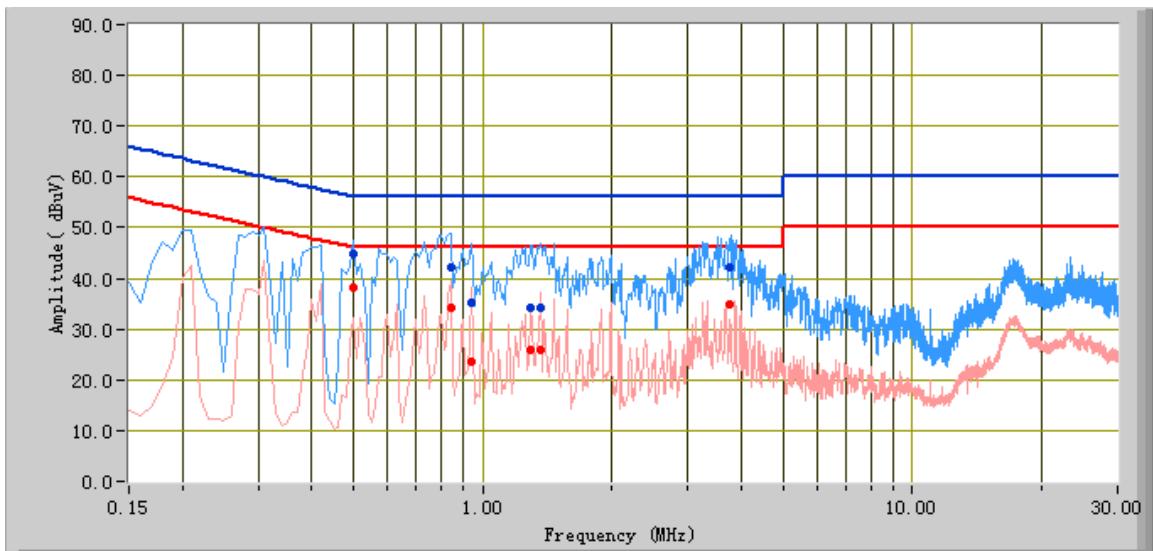**Test Mode:****Charging & Downloading****Peak Detector** **Quasi Peak Limit****Average Detector** **Average Limit**

### **Test Data**

#### **Phase Natural Plot at 120V AC, 60Hz**

Frequency (MHz)	Quasi Peak (dBuV)	Limit (dBuV)	Margin (dB)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Factors (dB)
0.84	42.03	56.00	-13.97	34.21	46.00	-11.79	10.37
3.74	42.18	56.00	-13.82	34.87	46.00	-11.13	10.76
0.50	44.92	56.00	-11.08	38.06	46.00	-7.94	10.60
0.94	35.11	56.00	-20.89	23.71	46.00	-22.29	10.33
1.36	34.12	56.00	-21.88	25.75	46.00	-20.25	10.32
1.29	34.22	56.00	-21.78	25.99	46.00	-20.01	10.31



## **5.2 Radiated Emissions Test Result**

Note:

## Test Result: Pass

**SIEMIC, INC.**


Accessing global markets

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 13 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

**Test Mode:****Charging & Downloading****Below 1GHz**

Peak Detector   
Quasi Peak Limit 

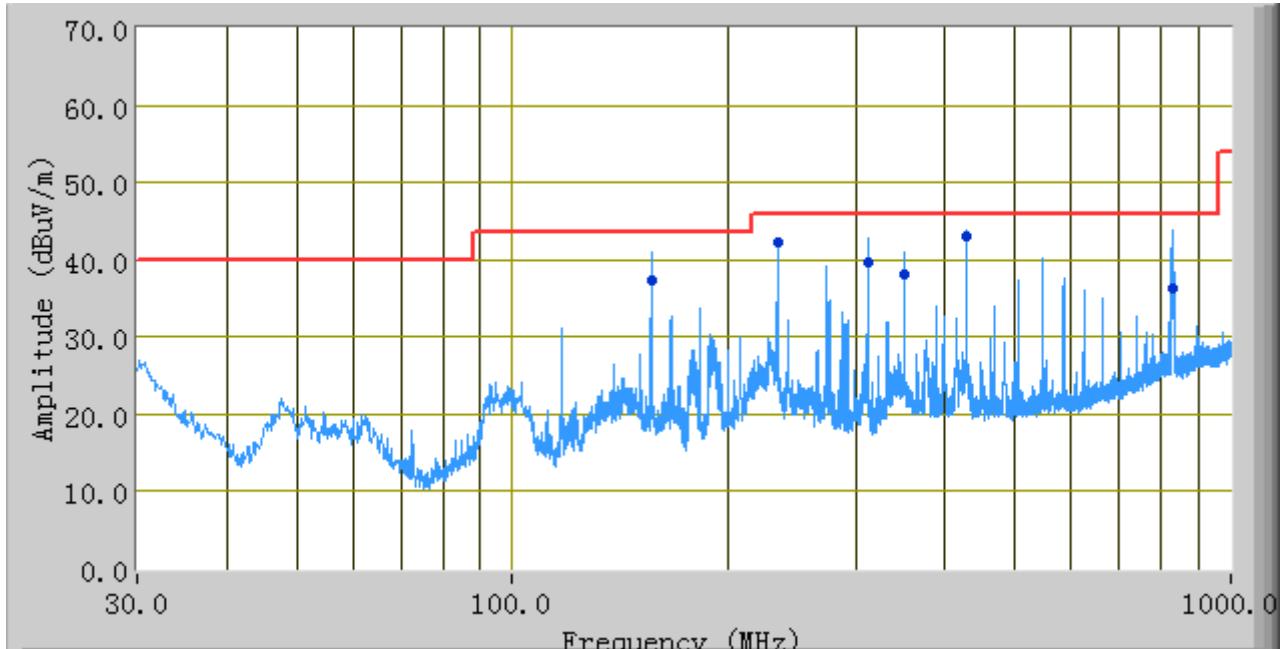**Test Data**

Frequency (MHz)	Quasi Peak (dBuV/m)	Azimuth	Polarity(H/V)	Height (cm)	Factors (dB)	Limit (dBuV)	Margin (dB)
828.85	36.38	86.00	H	113.00	3.86	46.00	-9.62
428.96	43.15	37.00	H	101.00	-2.70	46.00	-2.85
156.03	37.37	273.00	H	223.00	-7.90	43.52	-6.15
311.91	39.56	276.00	H	124.00	-6.24	46.00	-6.44
233.99	42.14	314.00	H	127.00	-7.62	46.00	-3.86
350.91	38.04	289.00	H	110.00	-4.81	46.00	-7.96

*Note: The data above 1 GHz which below 20 dB to the limit was not recorded.*



## **Annex A. TEST INSTRUMENTATION & GENERAL PROCEDURES**

### **Annex A.i. TEST INSTRUMENTATION**

<b>Instrument</b>	<b>Model</b>	<b>Serial #</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
<b>AC Line Conducted Emissions</b>				
EMI test receiver	ESCS30	8471241027	05/27/2013	05/26/2014
Line Impedance Stabilization Network	LI-125A	191106	11/14/2013	11/13/2014
Line Impedance Stabilization Network	LI-125A	191107	11/14/2013	11/13/2014
LISN	ISN T800	34373	01/11/2014	01/10/2015
Transient Limiter	LIT-153	531118	09/02/2013	09/01/2014
<b>Radiated Emissions</b>				
EMI test receiver	ESL6	100262	11/23/2013	11/22/2014
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/02/2013	09/01/2014
Microwave Preamplifier (0.5~18GHz)	PAM-118	443008	09/02/2013	09/01/2014
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/23/2013	09/22/2014
Double Ridge Horn Antenna	AH-118	71259	11/20/2013	11/19/2014



**SIEMIC, INC.**


Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 15 of 37  
www.siemic.com  
www.siemic.com.cn

## **Annex A.ii. AC LINE CONDUCTED EMISSIONS TEST DESCRIPTION**

### **Test Set-up**

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.
2. The power supply for the EUT was fed through a  $50\Omega/50\mu\text{H}$  EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipments were powered separately from another main supply.

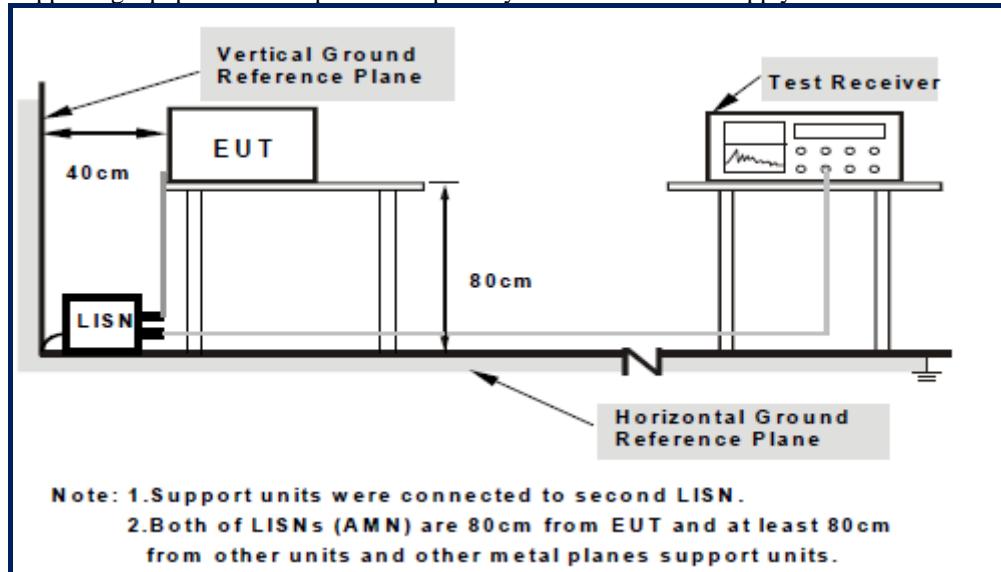

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration1

### **Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line (for AC mains) or DC line (for DC power).

### **Description of Conducted Emission Program**

This EMC Measurement software run LabView automation software and offers a common user interface for electromagnetic interference (EMI) measurements. This software is a modern and powerful tool for controlling and monitoring EMI test receivers and EMC test systems. It guarantees reliable collection, evaluation, and documentation of measurement results. Basically, this program will run a pre-scan measurement before it proceeds with the final measurement. The pre-scan routine will run the common scan range from 150 kHz to 30 MHz; the program will first start a peak and average scan on selectable measurement time and step size. After the program complete the pre-scan, this program will perform the Quasi Peak and Average measurement, based on the pre-scan peak data reduction result.



SIEMIC, INC.

## Accessing global markets

Title: Assessing global internet  
Main Model: Polaroid Test Report for POLAROID PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1

Issue Date: May 09, 2014

Page: 16 of 37

www.siemic.com

[www.siemic.com.cn](http://www.siemic.com.cn)

### Sample Calculation Example

At 20 MHz

$$\text{limit} = 250 \mu\text{V} = 47.96 \text{ dB}\mu\text{V}$$

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.20 dB

Q-P reading obtained directly from EMI Receiver = 40.00 dB $\mu$ V  
(Calibrated for system losses)

Therefore, Q-P margin =  $47.96 - 40.00 = 7.96$  i.e. **7.96 dB below limit**



## **Annex A. iii. RADIATED EMISSIONS TEST DESCRIPTION**


### **EUT Characterisation**

EUT characterisation, over the frequency range from 30MHz to 10<sup>th</sup> Harmonic, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8 m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer /receiver with the appropriate broadband antenna placed 3m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred; clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS) or 3m EMC chamber.

### **Test Set-up**

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5mX1.0mX0.8m high, non-conductive table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

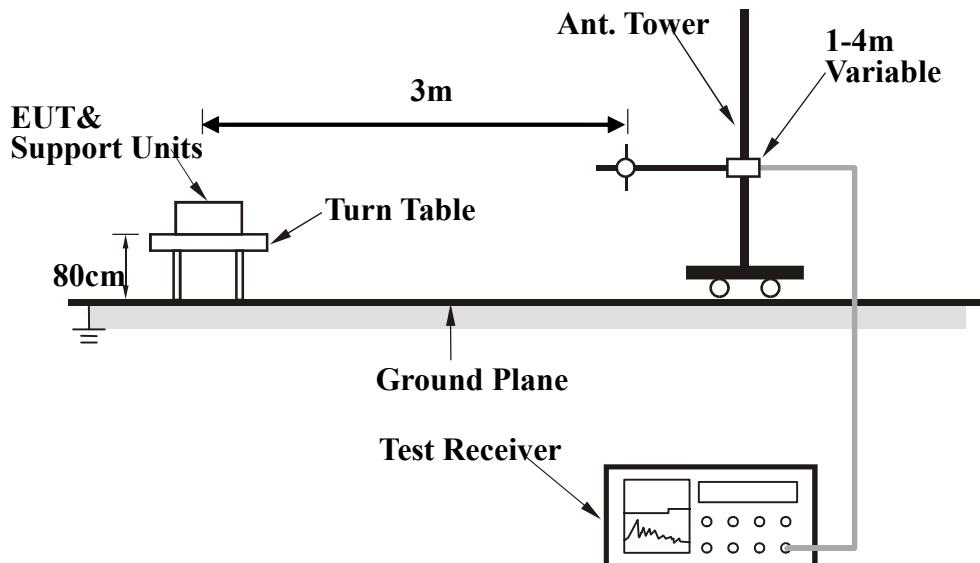

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration2

**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 18 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **Test Method**

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

### **Final Radiated Emission Measurement**

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on an open test site. As the same purpose, for emission frequencies measured above 1GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1GHz, set the spectrum analyzer on a 100kHz and 1MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured was complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100kHz	100kHz
Above 1000	Peak	1MHz	1MHz
	Average	1MHz	10Hz

## **Sample Calculation Example**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain (if any)}$$

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor} \text{ or}$$
$$\text{Set RBW} = 1\text{MHz}, \text{VBW} = 10\text{Hz}.$$

Note:

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1GHz. And the measuring instrument is set to quasi peak detector function.



**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009


Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 19 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **Annex B. EUT AND TEST SETUP PHOTOGRAPHS**

### **Annex B.i. Photograph 1: EUT External Photo**



Whole Package - Top View

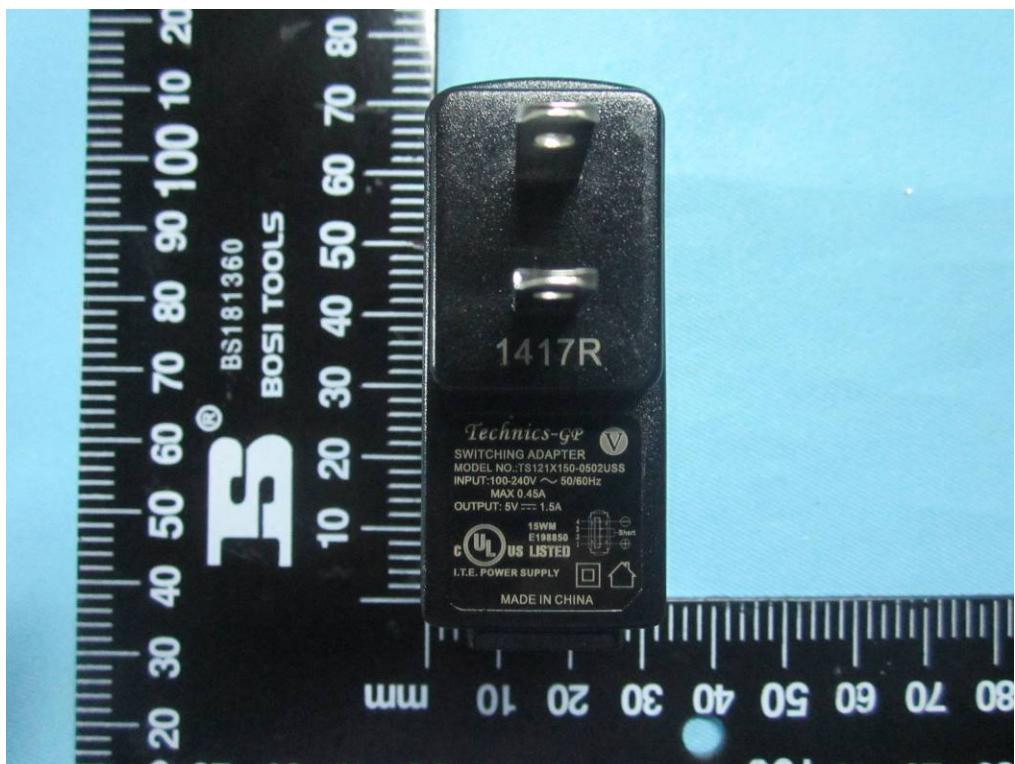

Adapter – Front View



**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 20 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)



EUT - Front View



EUT - Rear View




**SIEMIC, INC.**


*Accessing global markets*

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 21 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

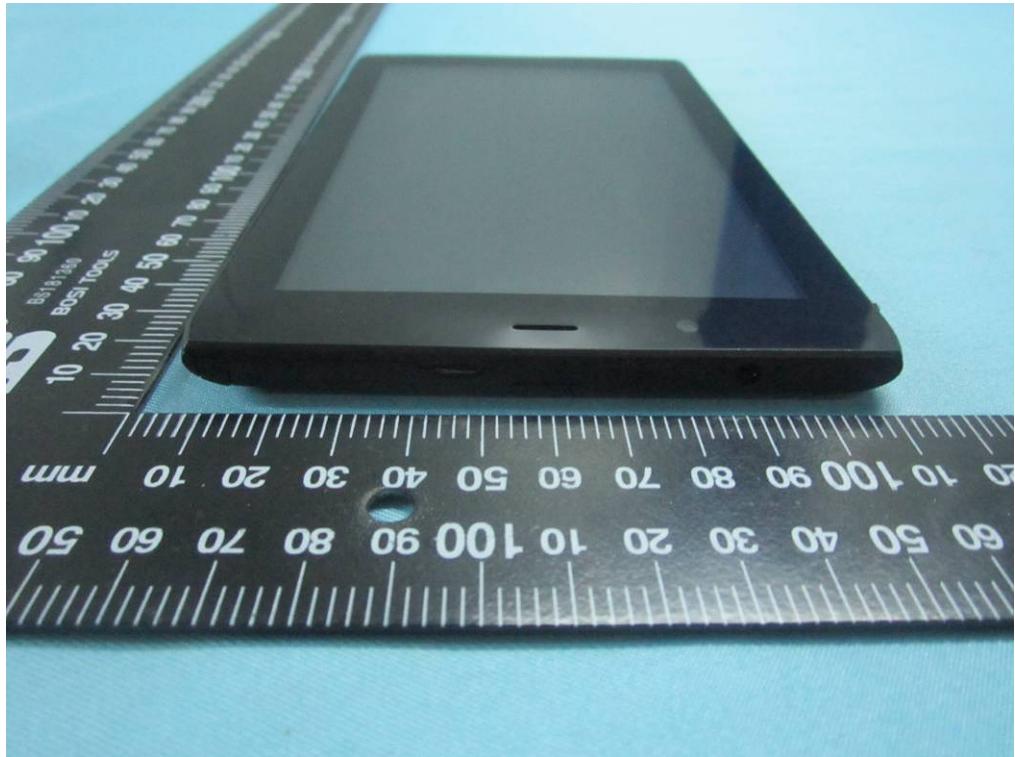

EUT - Top View

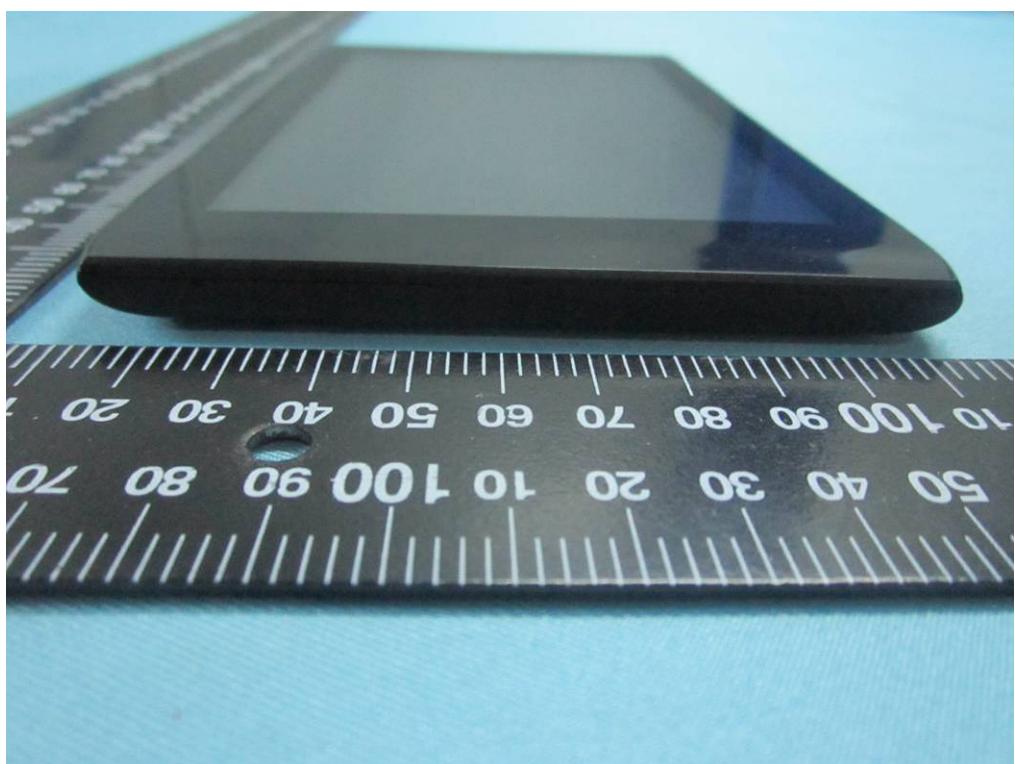

EUT - Bottom View




**SIEMIC, INC.**


*Accessing global markets*

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 22 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

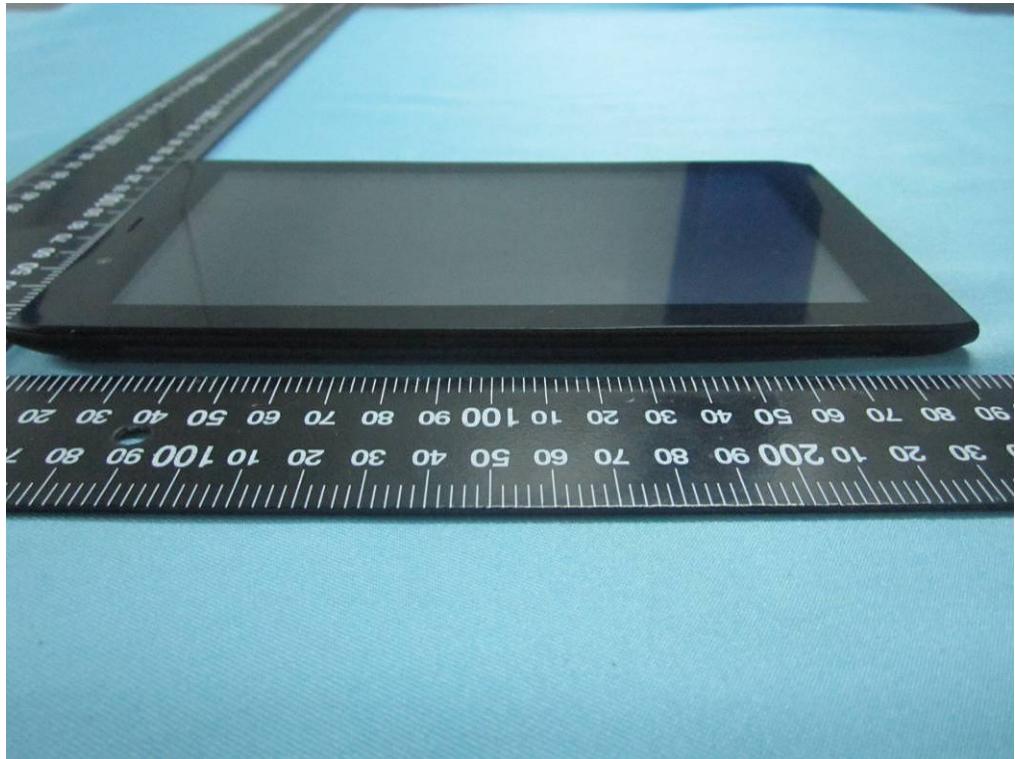

EUT - Left View

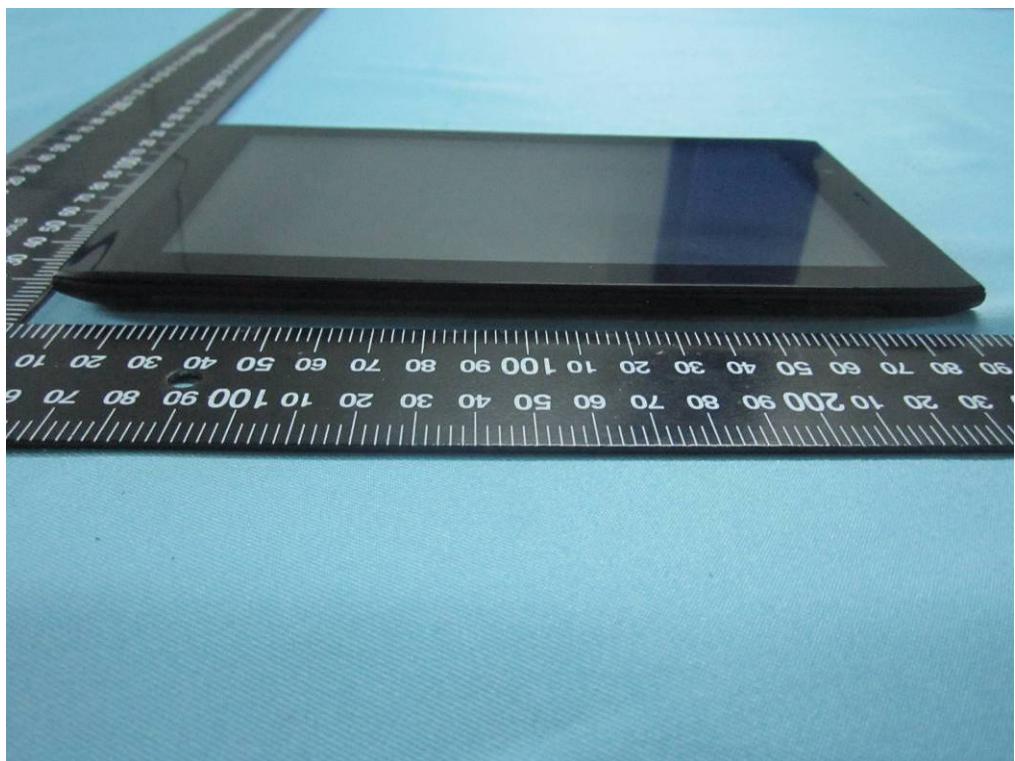

EUT - Right View




**SIEMIC, INC.**

Accessing global markets


Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 23 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

## Annex B.ii. Photograph 2: EUT Internal Photo

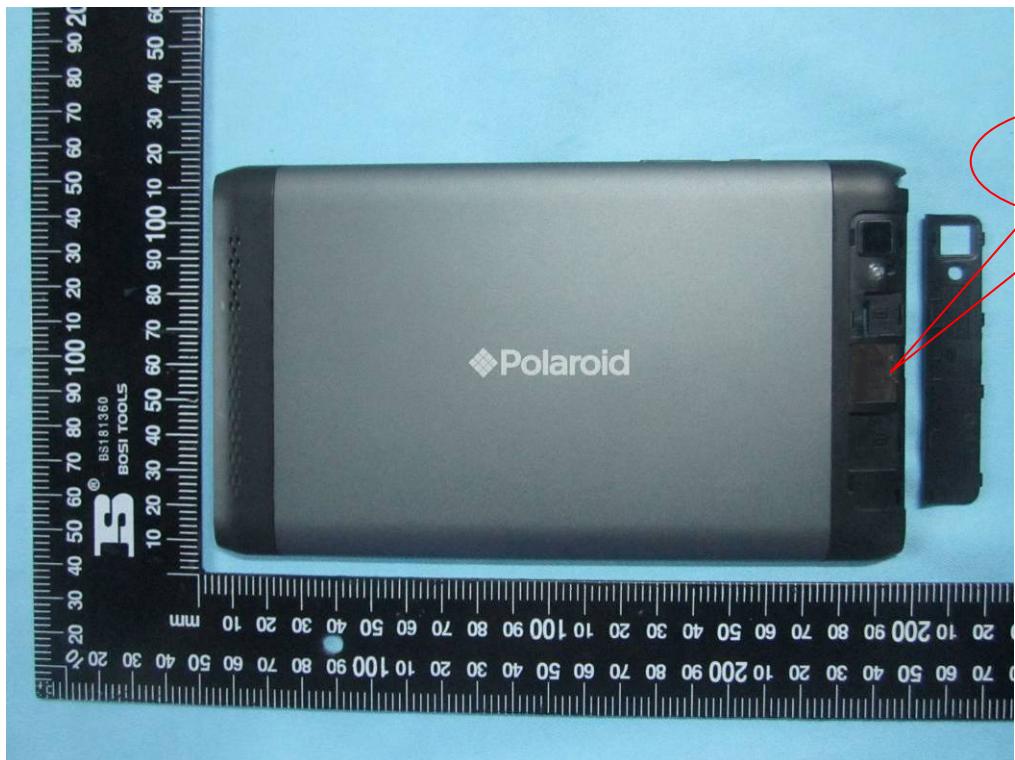


Cover Off - Top View 1

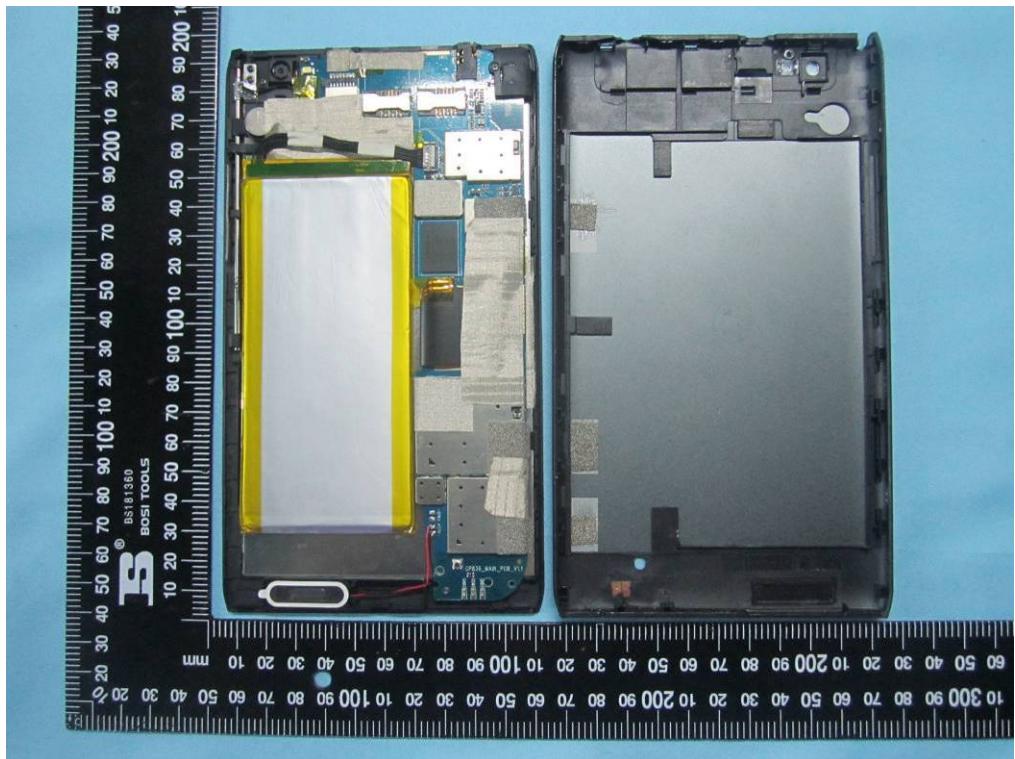


Cover Off - Top View 2


This SIM card slot is blocked

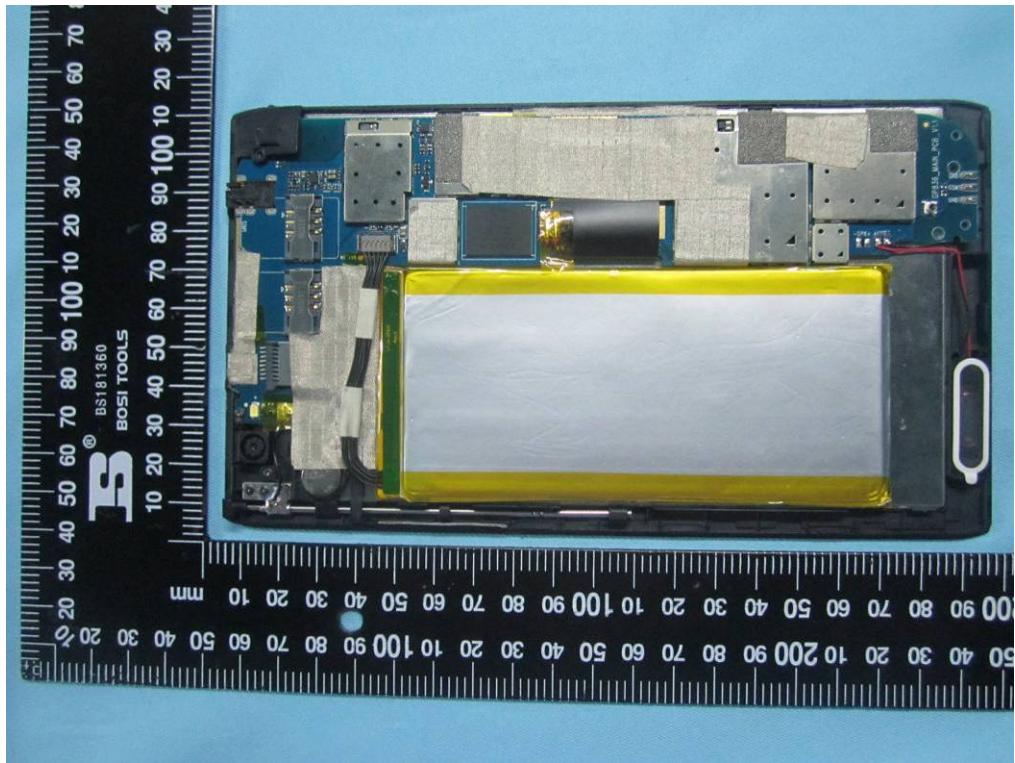


Cover Off - Top View 3

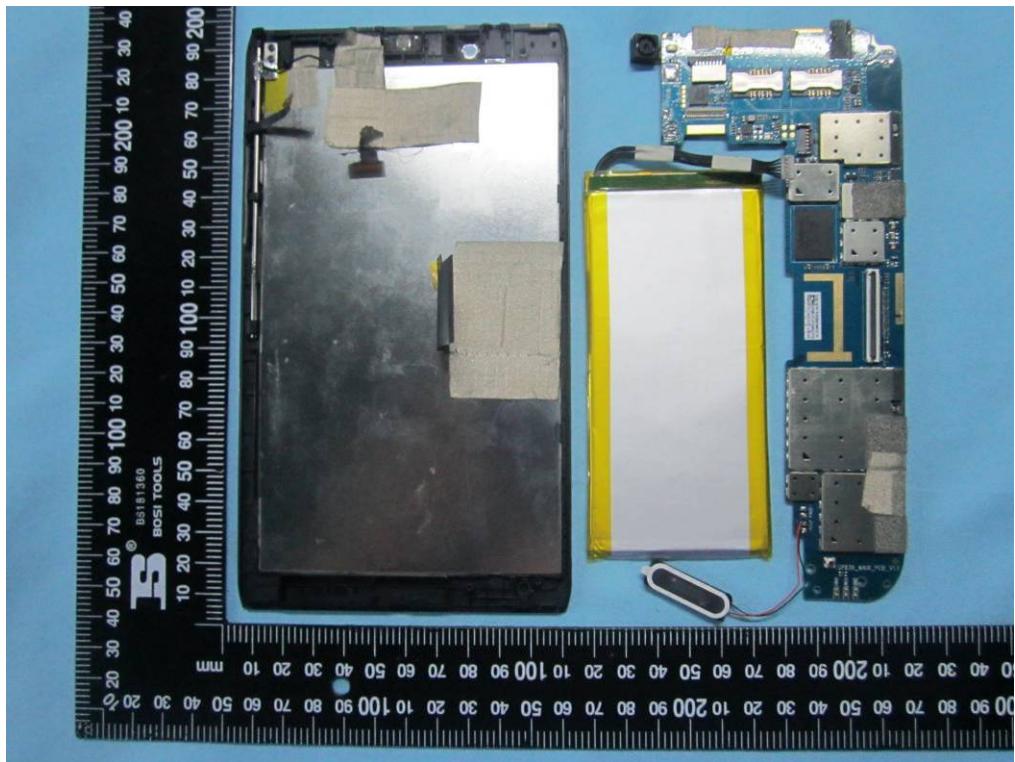

Cover Off - Top View 4

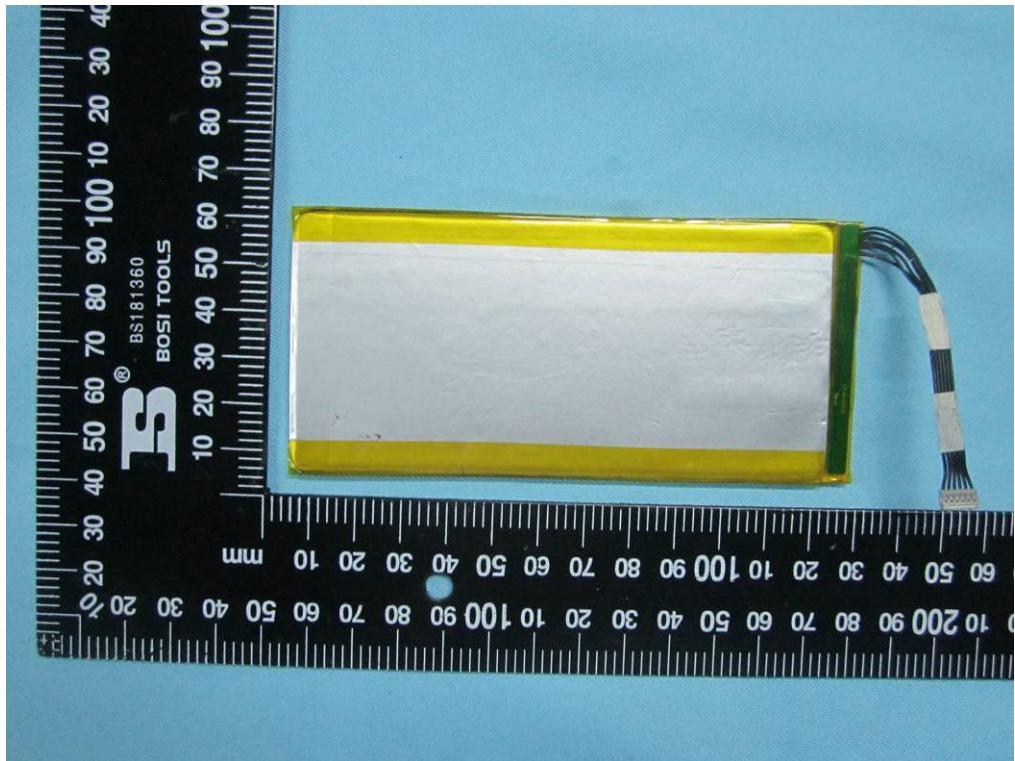

Battery - Front View

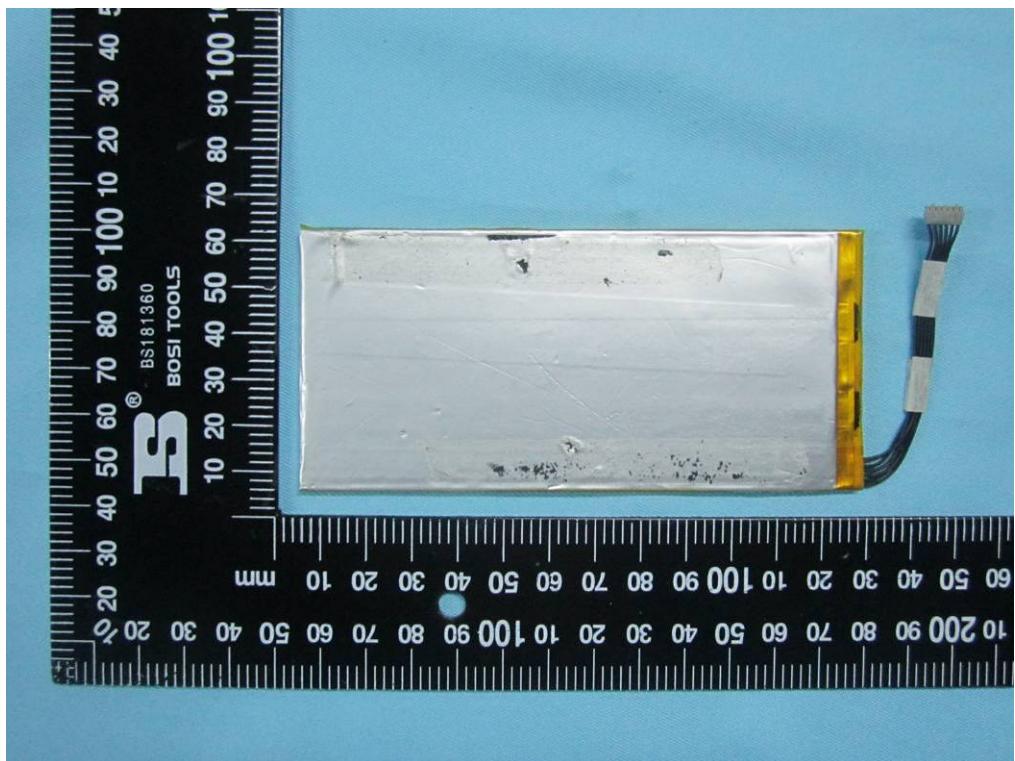

Battery – Rear View




**SIEMIC, INC.**


Accessing global markets

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 26 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

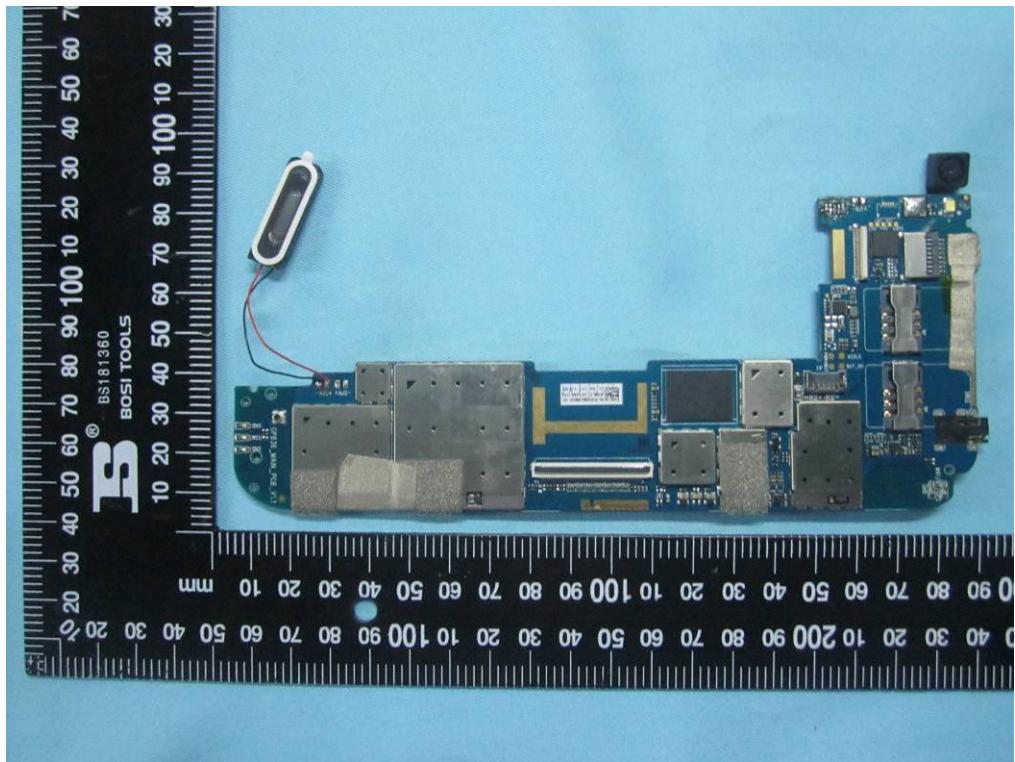

Mainborad With Shielding - Front View

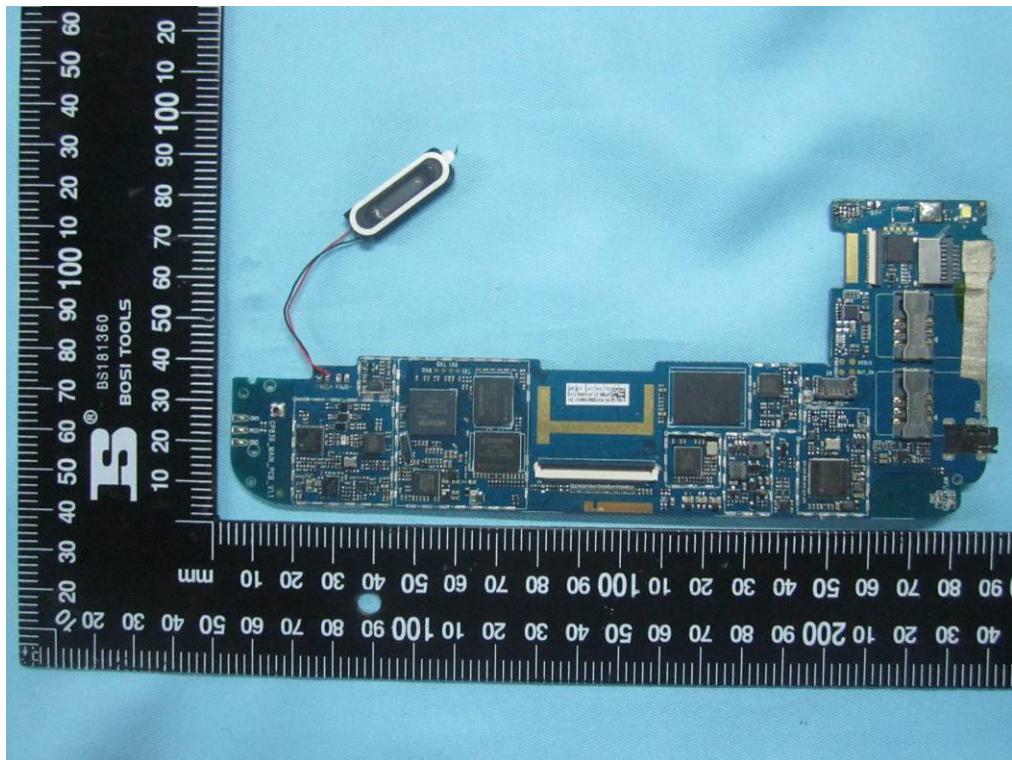

Mainborad Without Shielding - Front View




**SIEMIC, INC.**


Accessing global markets

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 27 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

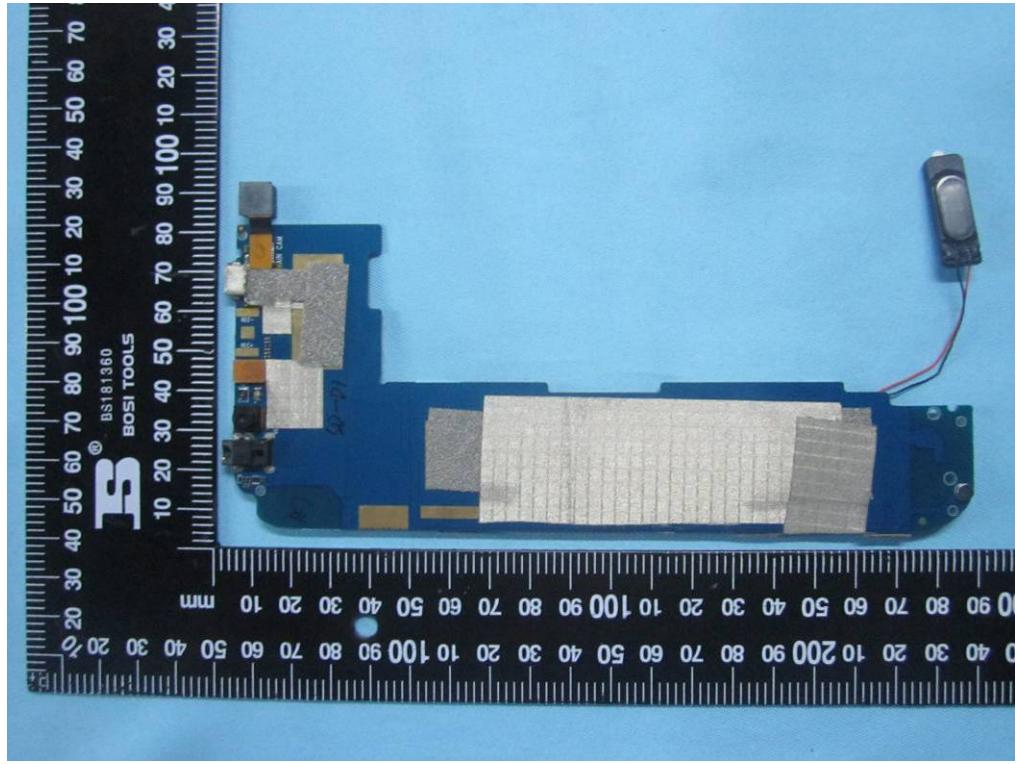

Mainborad – Rear View

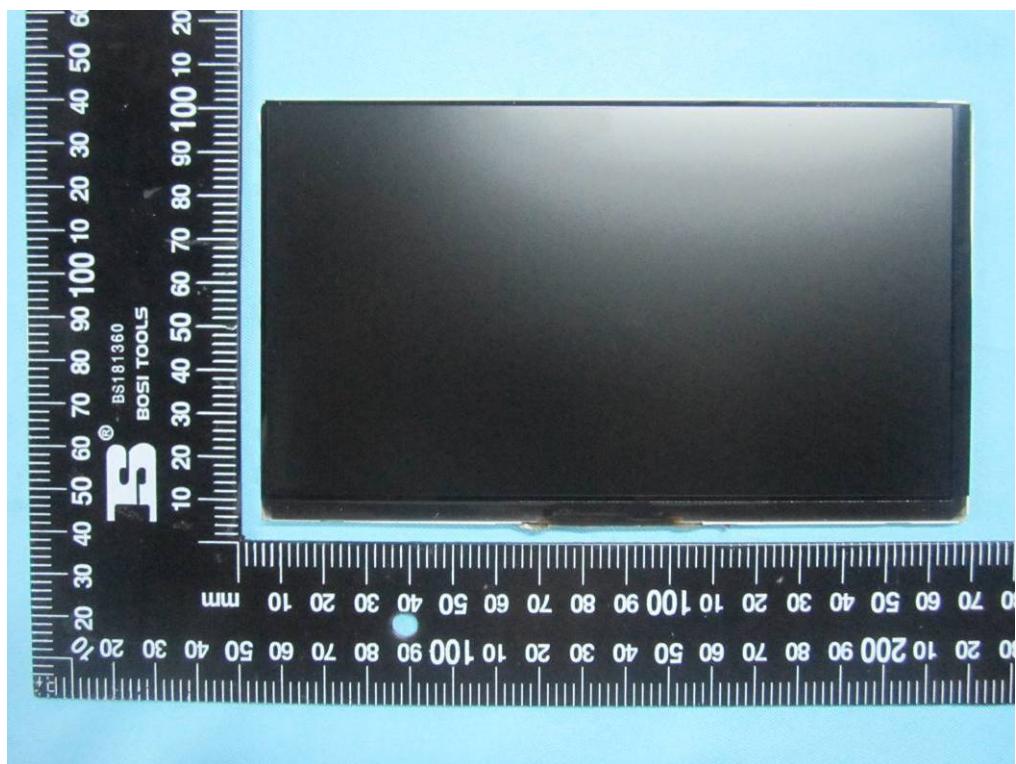

LCD - Front View




**SIEMIC, INC.**


Accessing global markets

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 28 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

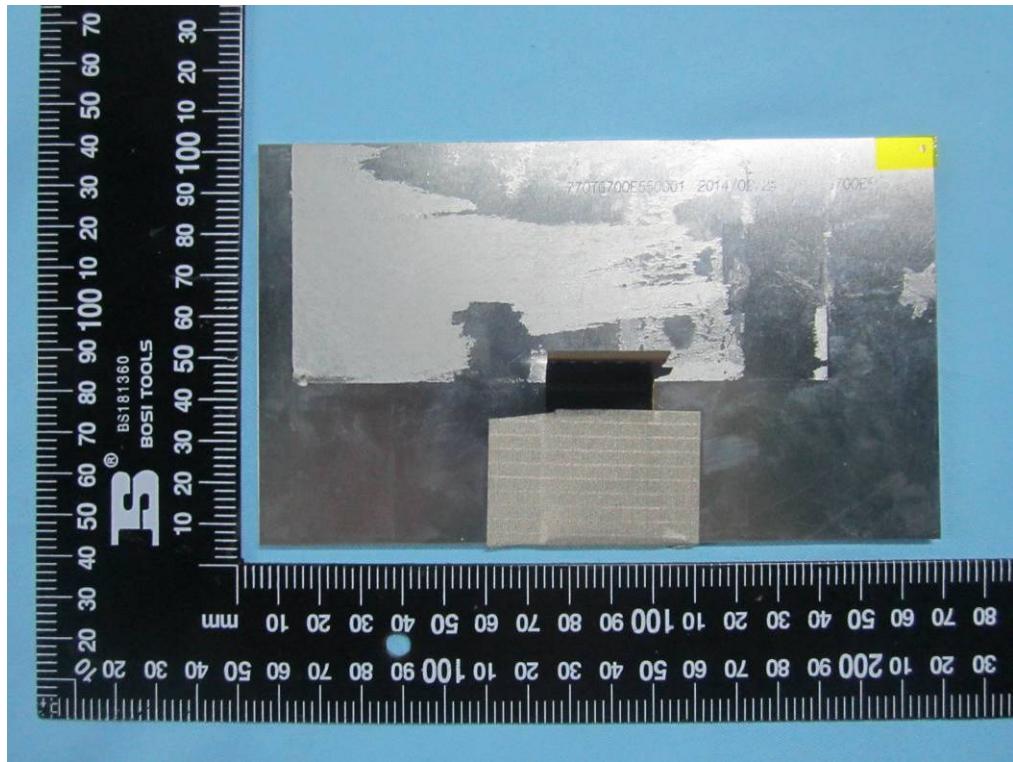

LCD - Rear View

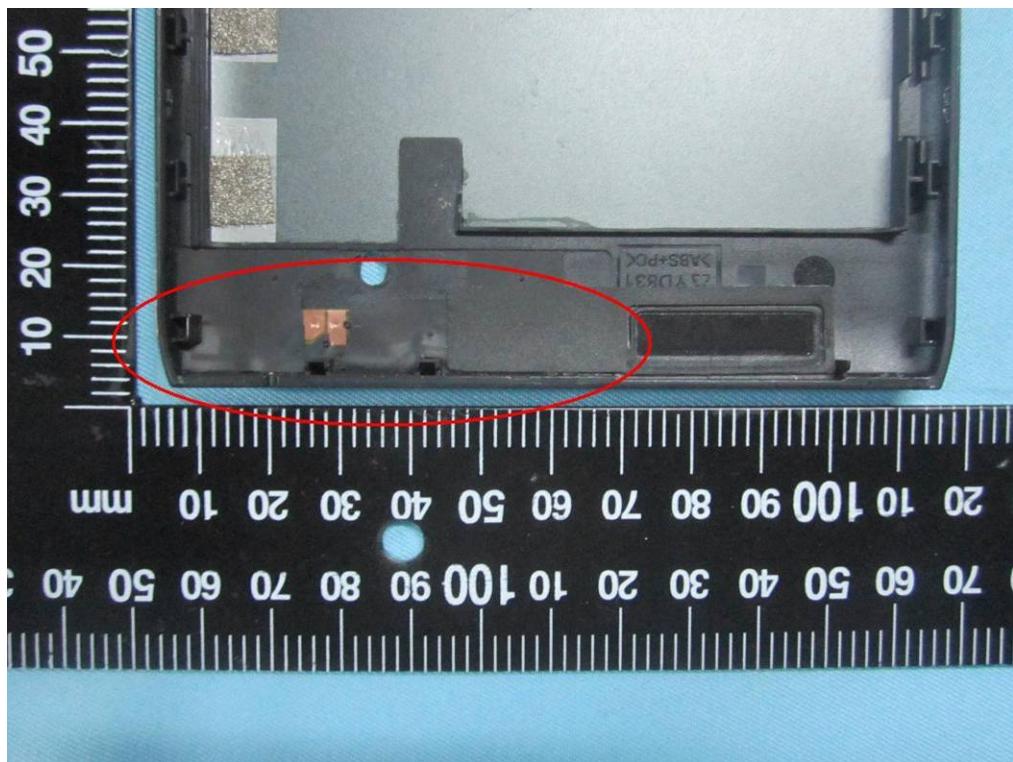

GSM/PCS/UMTS-FDD Antenna View




**SIEMIC, INC.**

*Accessing global markets*

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 29 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

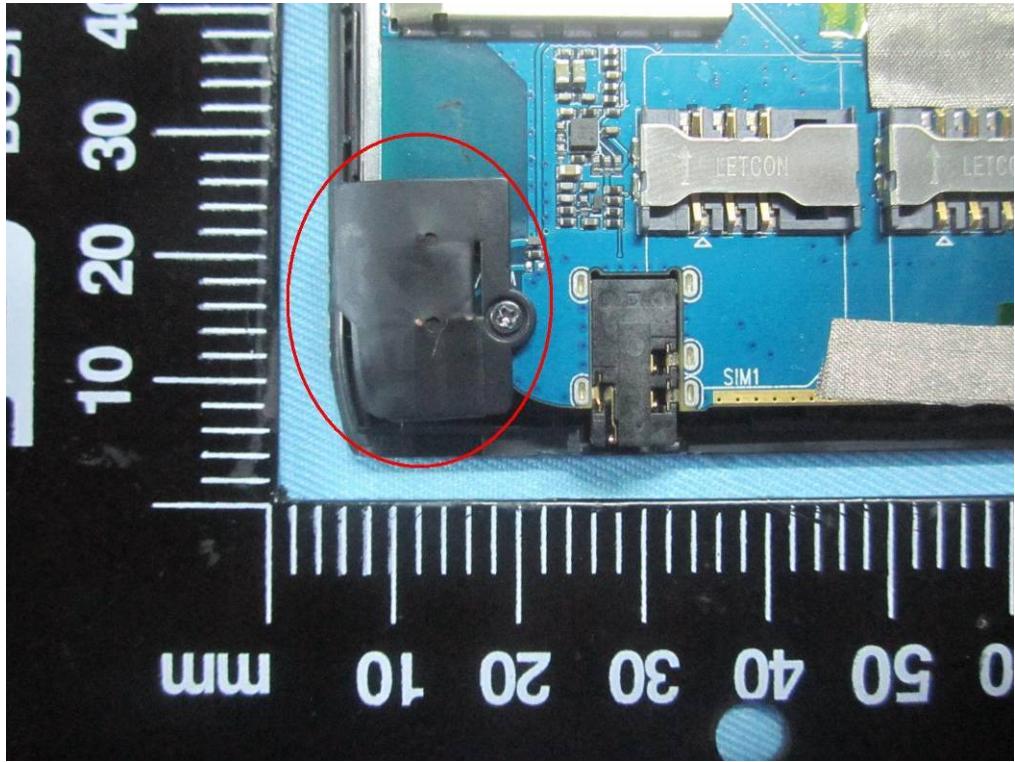

Bluetooth/WIFI Antenna View




**SIEMIC, INC.**  
Accessing global markets  
Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 30 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

### **Annex B.iii. Photograph 3: Test Setup Photo**



Conducted Emissions Test Setup Front View

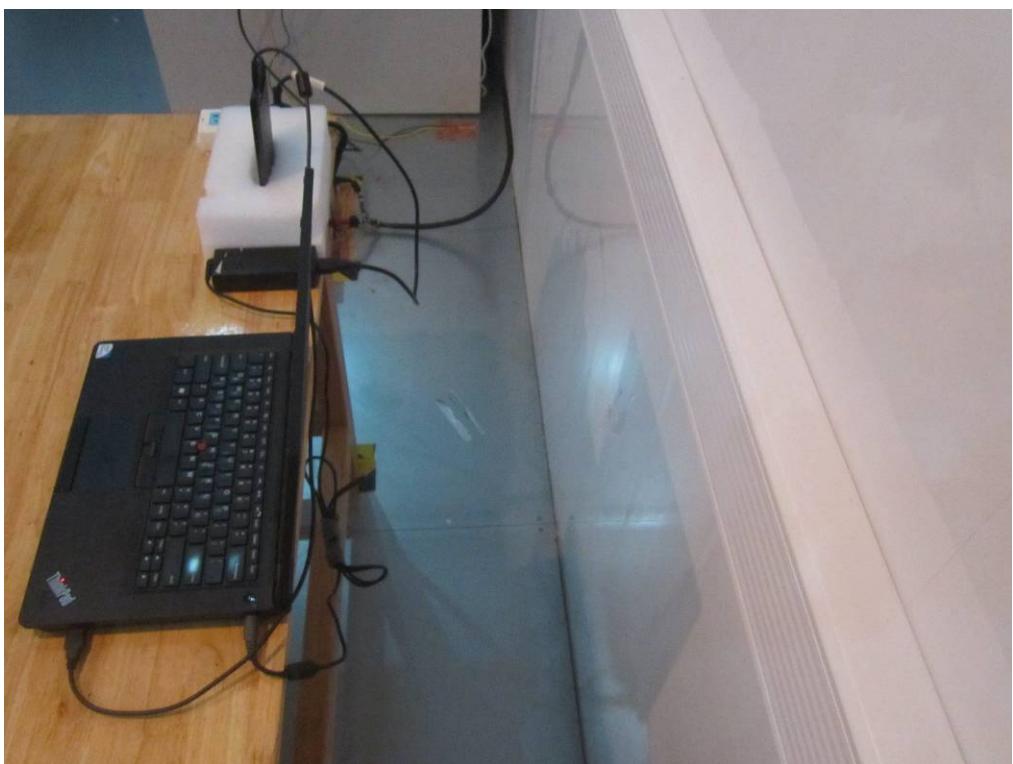

Conducted Emissions Test Setup Side View



**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 31 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)



Radiated Spurious Emissions Test Setup Below 1GHz - Front View



Radiated Spurious Emissions Test Setup Above 1GHz –Front View

**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 32 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **Annex C. TEST SETUP AND SUPPORTING EQUIPMENT**

### **EUT TEST CONDITIONS**

#### **Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION**

The following is a description of supporting equipment and details of cables used with the EUT.

<b>Equipment Description (Including Brand Name)</b>	<b>Model &amp; Serial Number</b>	<b>Cable Description (List Length, Type &amp; Purpose)</b>
Lenovo Laptop	E40& 0579A52	N/A



**SIEMIC, INC.**


*Accessing global markets*

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 33 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

## Block Configuration Diagram for Conducted Emissions

**Mode: Charging & Downloading**

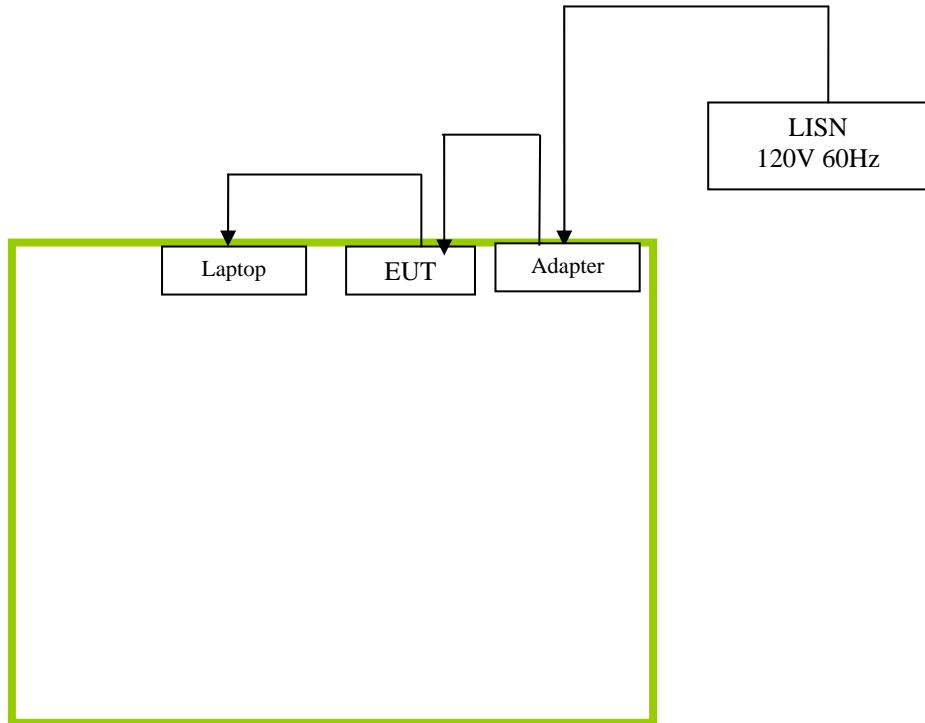



**SIEMIC, INC.**


*Accessing global markets*

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 34 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

## Block Configuration Diagram for Radiated Emissions

**Mode: Charging & Downloading**

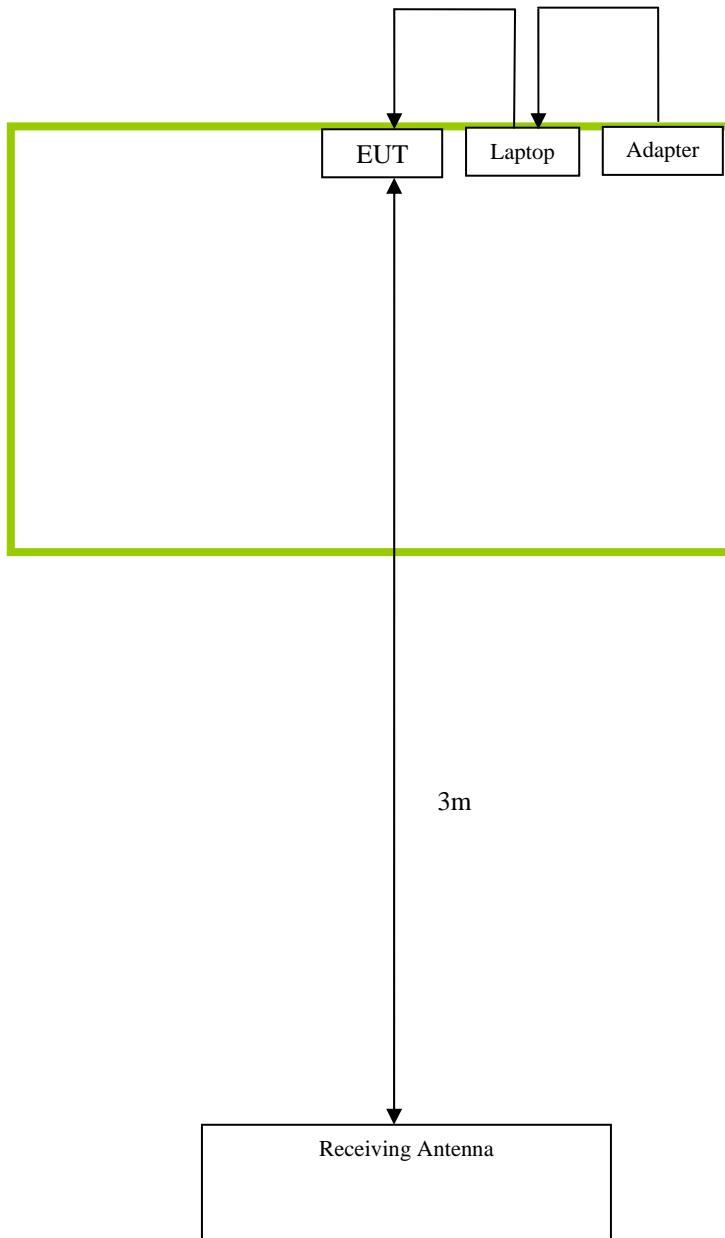

**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 35 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

### **Annex C.ii. EUT OPERATING CONDITIONS**

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
<b>Emissions</b>	Charging & Downloading



**SIEMIC, INC.**

*Accessing global markets*

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 36 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **Annex D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST**

**Please see attachment**



**SIEMIC, INC.**

*Accessing global markets*

Title: EMC Test Report for POLAROID PMID705GTV  
Main Model: PMID705GTV  
Serial Model: N/A  
To: FCC Part 15 Subpart B Class B: 2013 , ANSI C63.4:2009

Report No.: 14070068-FCC-E1  
Issue Date: May 09, 2014  
Page: 37 of 37  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **Annex E. DECLARATION OF SIMILARITY**



Mexico City, May 8<sup>th</sup> 2014

COMERCIALIZADORA MILENIO SA DE CV.  
Juan Salvador Agraz 65, 22nd Floor,  
Mexico City 05300, Mexico  
Tel: +5255 8851 4400  
Date: 2014-05-08

### **Declaration of Similarity**

To:

**SIEMIC (Shenzhen-China) Laboratories**  
Zone A, Floor 1, Building 2, Wan Ye Long Technology Park,  
South Side of Zhoushi Road,  
Shiyan Street, Bao'an District, Shenzhen 518108, Guangdong, P.R.C.  
Tel: +(86) 0755-26014629, 26014953, 27629948, 27628616-808

We, COMERCIALIZADORA MILENIO S.A. DE C.V., hereby declare that our product, POLAROID PMID705GTV, Model: PMID705GTV includes two types: Type A and Type B, these two models are electrically and mechanically identical, share the same PCB Layout and components. And the only difference between them is that Type A has dual SIM card slots. Type B has single SIM card slot.

Sincerely,

**Ronnie Vera**  
Engineering Manager