

FCC ID TEST REPORT

for

Bluetooth Stereo Headset

Model: BH-07(NFC)

FCC ID: 2ABDCBH-07

Prepared for: BRIGHT DRAGON TECHNOLOGY LIMITED
FLAT 52, 9/F., SINO LND.PLAZA, NO.9, KAI CHEUNG RD.,
KOWLOONBAY, KLN. H.K.

Prepared by: Shenzhen TCT Testing Technology Co.,Ltd
1F, Building 1, Yibaolai Industrial Park, Qiaotou Village, Fuyong Town,
Baoan District, Shenzhen, Guangdong, China

TEL: +86-0755-27363339

FAX: +86-0755-27673332

Report Number: TCT131209003F2-2
Date of Test: Dec. 15-Dec. 27, 2013
Date of Report: Dec. 27, 2013

The results detailed in this test report relate only to the specific sample(s) tested. It is the Application's responsibility to ensure that all production units are manufactured with equivalent EMC characteristics. This report is not to be reproduced except in full, without written approval from TCT Testing Technology.

Table of Contents

1.0 General Details.....	3
1.1 Test Lab Details	3
1.2 Applicant Details	3
1.3 Description of EUT.....	4
1.4 Test Engineer	4
2.0 Test equipments and Associated Equipment used during the test.....	5
2.1 Test Equipments.....	5
2.2 AE used during the test	5
2.3. Block Diagram of EUT Configuration	5
3.0 Technical Details	6
3.1 Summary of test results	6
3.2 Test Standards	6
4.0 EUT Modification	6
5.0 Measurement Uncertainty	6
6.0 Power Line Conducted Emission Test.....	7
6.1 Schematics of the test	7
6.2 Test Method and test Procedure.....	7
6.3 EUT Operating Condition.....	7
6.4 Test Equipment	7
6.5 Conducted Emission Limit	8
6.6 Test specification:	8
6.7 Test result.....	8
7.0 Radiated Emission Test	11
7.1 Test Method and test Procedure:.....	11
7.2 Block diagram of Test setup	11
7.3 Limit	13
7.4 Test Equipment:	14
7.5 Test specification:	14
8.0 Occupied Bandwidth	20
8.1 Test Equipment	20
8.2 Test Specification:.....	20
8.3 Limit	20
8.4 Test Result:	20
9.0 Frequency Stability Measurement	21
9.1 Test equipment.....	21
9.2 Test Method and test Procedure:.....	21
9.3 Block diagram of Test setup	21
9.4 Test Specification:.....	21
9.5 Limit	21
9.6 Test Result:	22
10.0 Antenna Requirement	23

1.0 General Details

1.1 Test Lab Details

Name :	Shenzhen Tongce Testing Lab
Address:	1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China
Telephone:	13410377511
Fax:	--

The test facility is recognized, certified, or accredited by the following organizations:

FCC Registration Number: 572331

Shenzhen TCT Testing Technology Co., Ltd., Shenzhen EMC Laboratory: Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

Registration Number: 572331

Industry Canada (IC)

Site Listed with Industry Canada of Ottawa, Canada

Registration Number IC: 10668A-1

For 3m chamber

1.2 Applicant Details

Applicant:	BRIGHT DRAGON TECHNOLOGY LIMITED
Address:	FLAT 52, 9/F., SINO LND.PLAZA, NO.9, KAI CHEUNG RD., KOWLOONBAY, KLN. H.K.
Telephone:	--
Fax:	--

Manufacturer:	ODSONIC COMPUTER CO.,
Address:	4F. #5 BUILDING(JI AN TAI INDUSTRIAL PARK) FU QIAO, FU YONG TOWN, BAO AN AREA, SHEN ZHEN, GUANGDONG P.R.C
Telephone:	86-13602681220
Fax:	86-755-29929245

1.3 Description of EUT

Product:	Bluetooth Stereo Headset
Model No.:	BH-07(NFC)
Additional Model:	BH-01, BH-01A, BH-01B, BH-02, BH-02A, BH-02B, BH-03, BH-03A, BH-03B, BH-04, BH-04A, BH-04B, BH-05, BH-05A, BH-05B, BH-06, BH-06A, BH-06B, BH-07, BH-07A, BH-07B, BH-08, BH-08A, BH-08B, BH-09, BH-09A, BH-09B, NU-BTH(BH-07), Xstream H2, Xstream H3.
Rating:	DC 3.7V via Battery or DC 5V via USB line
Operation Frequency:	13.56MHz
Antenna Designation:	A loop antenna and the maximum gain is 0 dBi.
Model Difference:	All modes above are identical in interior structure, electrical circuits and components, and just model names are different for the marketing requirement.

1.4 Test Engineer

The sample tested by



Printed name: Jack Kang

2.0 Test equipments and Associated Equipment used during the test.


2.1 Test Equipments

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	July 07, 2013	July 06, 2014
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	July 07, 2013	July 06, 2014
Pre-amplifier	Teseq	LAN6900	--	July 08, 2013	July 07, 2014
Pre-amplifier	Agilent	8447D	83153007374	July 08, 2013	July 07, 2014
Pre-amplifier	Agilent	8449B	3008A01738	July 08, 2013	July 07, 2014
Loop antenna	A.R.A.	PLA-1030/B	1029	July 8, 2013	July 7, 2014
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	July 08, 2013	July 07, 2014
Temperature/Humidity chamber	Shenzhen hongjian	SDJ-80L	SDJ-80J	Feb. 20, 2013	Feb. 19, 2014
EMI Test Receiver	R&S	ESCS30	100139	July 7, 2013	July 6, 2014
LISN	AFJ	LS16C	16010222119	July 7, 2013	July 6, 2014

2.2 AE used during the test

Equipment type	Manufacturer	Model
Notebook	Lenovo	G485
N.A.		
N.A.		
N.A.		

2.3. Block Diagram of EUT Configuration



Note: 1) The EUT is a Bluetooth Stereo Headset With NFC function.

2) N.A. means Not Applicable.

3) The EUT is a portable device, and measurements were conducted in all three axis (X, Y, Z), and the worst case (X axis) was submitted only.

3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications

Requirement	CFR 47 Section	Result	Notes
Conduction Emission, 0.15MHz to 30MHz	15.207	PASS	Complies
Radiation Emission	15.225(a) (b) (c) (d), 15.209,15.35	PASS	Complies
Frequency Stability Over Extreme Temperature And Voltage Conditions	15.225(e)	PASS	Complies
Occupied Bandwidth	15.215	PASS	Complies
Antenna Requirements	15.203	PASS	Complies

3.2 Test Standards

FCC Part 15:2012 Subpart C, Paragraph 15.225

4.0 EUT Modification

No modification by Shenzhen TCT Testing Technology Co., Ltd


5.0 Measurement Uncertainty

(95% confidence levels, k=2)

No.	Item	MU
1.	Radio Frequency	$\pm 1 \times 10^{-9}$
2.	Temperature	$\pm 0.1^{\circ}\text{C}$
3.	Humidity	$\pm 1.0\%$
4.	RF power, conducted	$\pm 0.34\text{dB}$
5.	RF power density, conducted	$\pm 1.45\text{dB}$
6.	Spurious emissions, conducted	$\pm 3.70\text{dB}$
7.	All emissions, radiated	$\pm 4.50\text{dB}$

6.0 Power Line Conducted Emission Test

6.1 Schematics of the test

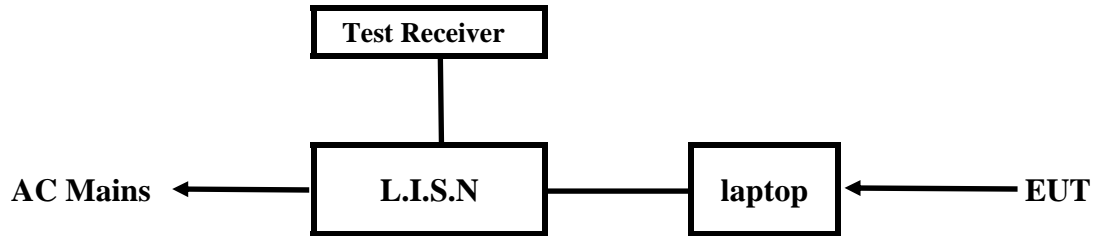


6.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2009. The Frequency spectrum From 0.15MHz to 30MHz was investigated.

Test Voltage: 120V~, 60Hz

Block diagram of Test setup

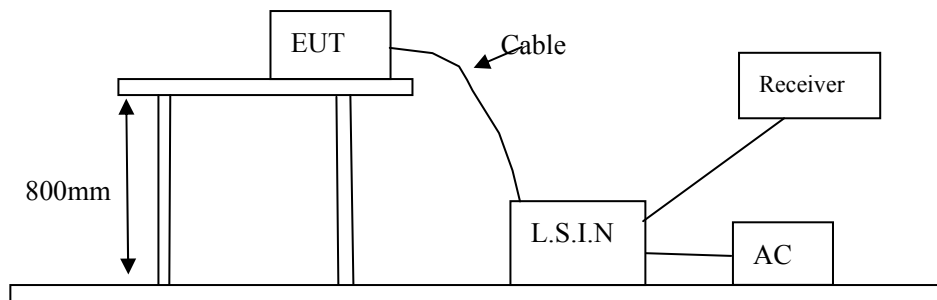

6.3 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2009

- 1) Setup the EUT and simulators as shown on the following
- 2) Enable AF signal and confirm EUT active to normal condition

6.4 Test Equipment

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCS30	100139	July 7, 2013	July 6, 2014
LISN	AFJ	LS16C	16010222119	July 7, 2013	July 6, 2014

6.5 Conducted Emission Limit

Frequency(MHz)	Class A Limits (dBμV)		Class B Limits (dBμV)	
	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	79.0	66.0	66.0~56.0*	56.0~46.0*
0.50 ~ 5.00	73.0	60.0	56.0	46.0
5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes: 1) *Decreasing linearly with logarithm of frequency.
2) The tighter limit shall apply at the transition frequencies

6.6 Test specification:

Environmental conditions: Temperature: 22° C Humidity: 52% Atmospheric pressure: 103kPa

Frequency range: 0.15 MHz – 30 MHz

The test was carried out in the following operation mode(s):

- NFC Tx Mode

6.7 Test result

Pass

Min. limit margin 8.97dB at 0.4429MHz

The requirements are FULFILLED

Remarks:

A Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)


EUT Description: Bluetooth Stereo Headset

Operation Mode: NFC Tx Mode

Tested By: Beryl Zhao

Test date: Dec. 18, 2013

Start Frequency	Stop Frequency	Step	IF BW	Detector	Final M-Time
0.15MHz	30MHz	4.5KHz	10KHz	QP+AV	1s

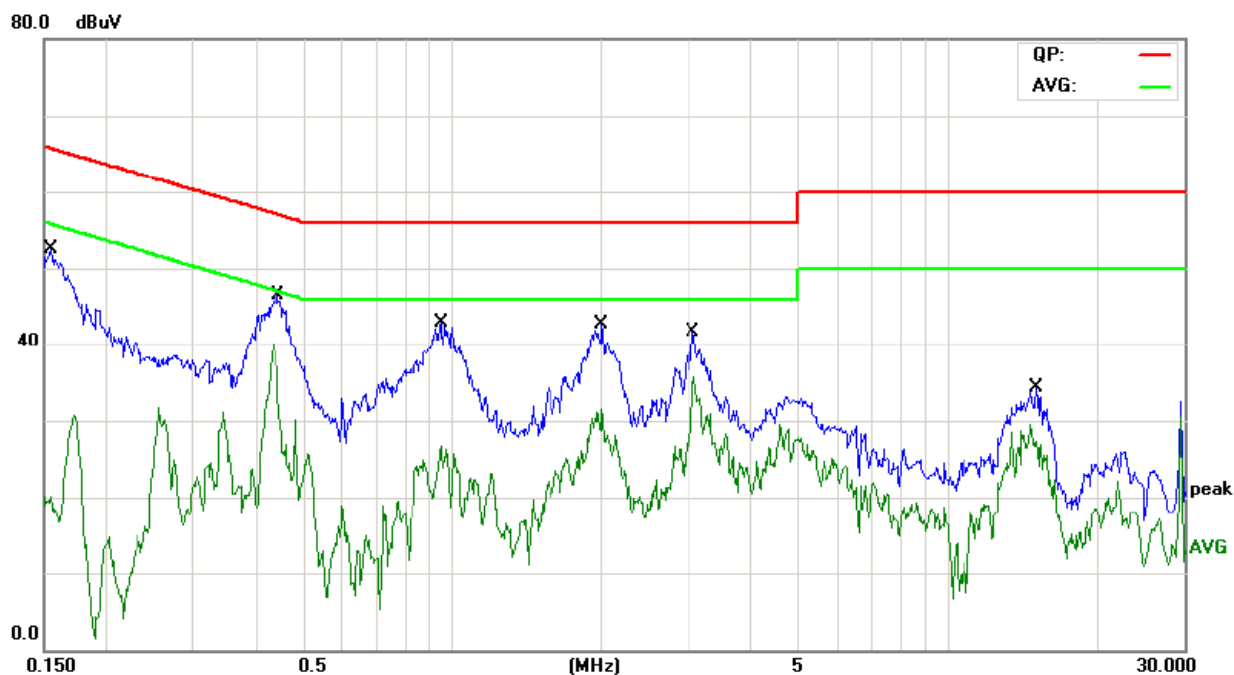

Frequency (MHz)	Reading(dBμV)				Limit (dBμV)	
	Live		Neutral		Quasi-peak	Average
	Quasi-peak	Average	Quasi-peak	Average		
0.1547	52.45	19.27	--	--	65.74	55.74
0.4429	46.41	38.04	--	--	57.01	47.01
0.9475	42.95	35.46	--	--	56.00	46.00
2.0011	42.63	29.01	--	--	56.00	46.00
3.0574	41.63	33.57	--	--	56.00	46.00
15.0898	34.37	27.18	--	--	60.00	50.00

B Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)


EUT Description: Bluetooth Stereo Headset

Operation Mode: NFC Tx Mode

Tested By: Beryl Zhao

Test Data: Dec. 18, 2013

Start Frequency	Stop Frequency	Step	IF BW	Detector	Final M-Time
0.15MHz	30MHz	4.5KHz	10KHz	QP+AV	1s

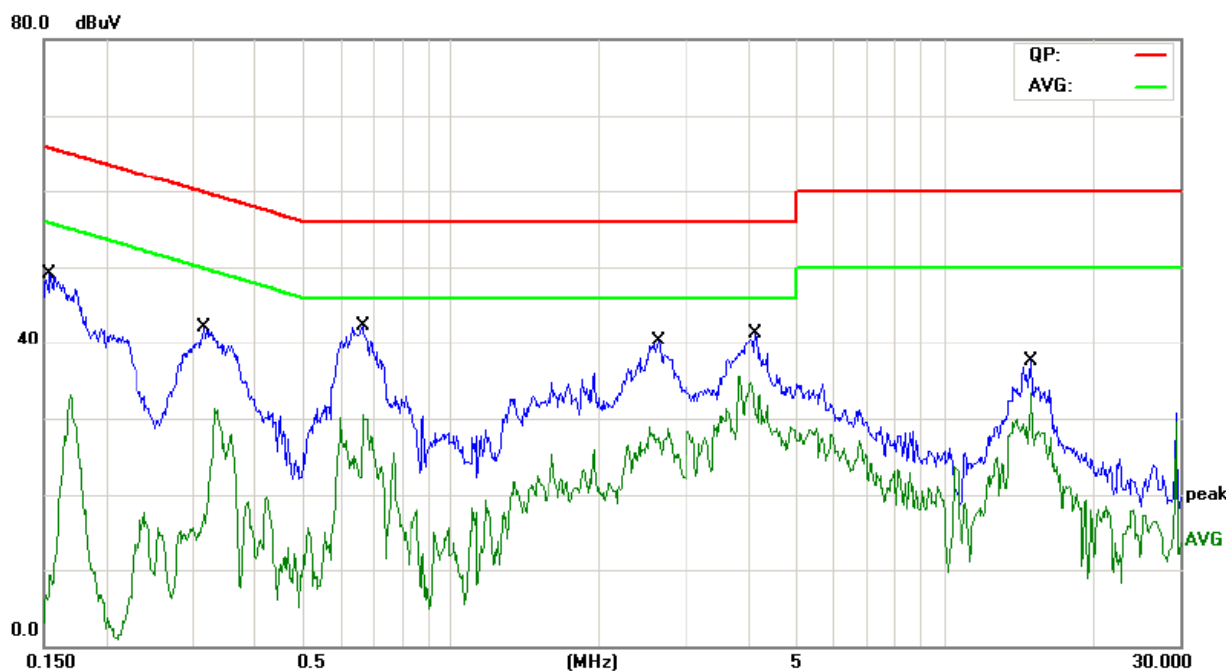

Frequency (MHz)	Reading(dBμV)				Limit (dBμV)	
	Live		Neutral		Quasi-peak	Average
	Quasi-peak	Average	Quasi-peak	Average		
0.1539	--	--	49.09	8.33	65.78	55.78
0.3178	--	--	42.15	17.85	59.76	49.76
0.6611	--	--	42.39	27.06	56.00	46.00
2.6459	--	--	40.22	28.45	56.00	46.00
4.1523	--	--	41.23	31.74	56.00	46.00
15.0114	--	--	37.42	31.08	60.00	50.00


7.0 Radiated Emission Test

7.1 Test Method and test Procedure:


- 1) The EUT was tested according to ANSI C63.10 –2009.
- 2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2009.
- 3) The frequency spectrum from 9kHz to 5GHz was investigated. All readings from 9kHz to 30MHz are quasi-peak values with a resolution bandwidth of 10 kHz, measured with loop antenna. All readings from 30MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz, measured with Bi-log antenna. All readings are above 1 GHz are peak values with a resolution bandwidth of 1 MHz, measured with horn antenna.
- 4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for above 30MHz each frequency. The antenna high is 1 m to find the maximum emission for each frequency below 30MHz
- 5) Tested distance: 3 meters
- 6) The antenna polarization: Vertical polarization and Horizontal polarization.
- 7) Each azimuth of E.U.T will be tested.

7.2 Block diagram of Test setup


Block diagram of Test setup for frequency 30-1000MHz

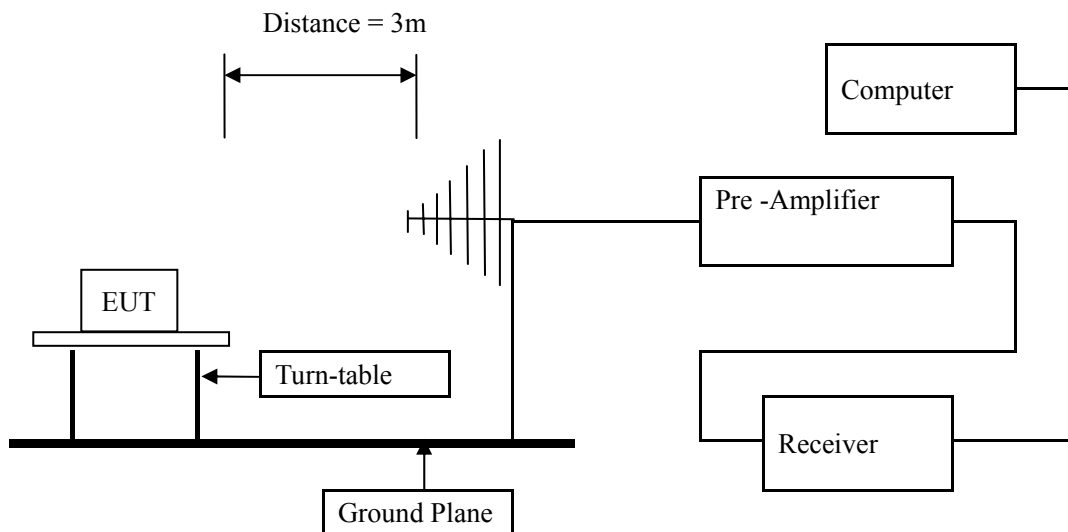

Block diagram of Test setup for frequency below 30MHz

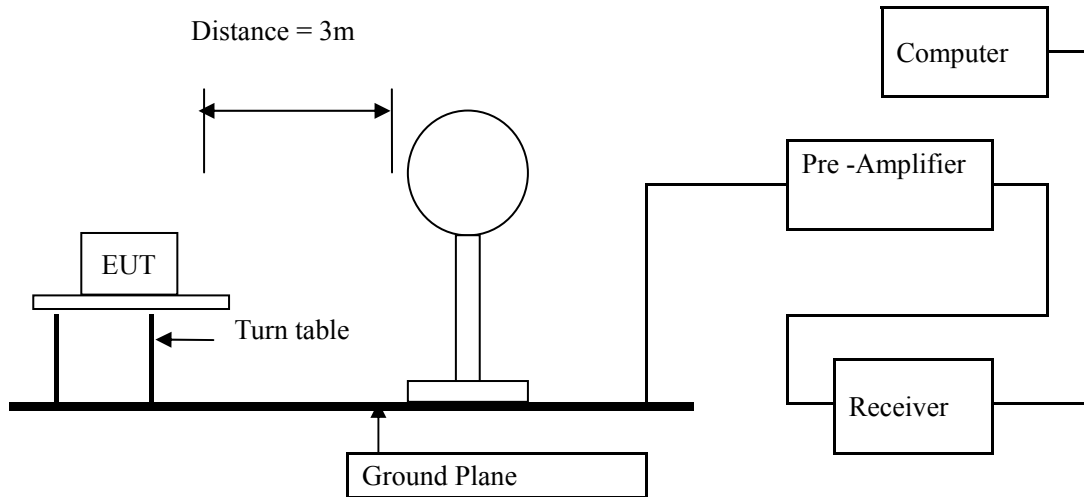

Block diagram of Test setup for frequency above 1GHz

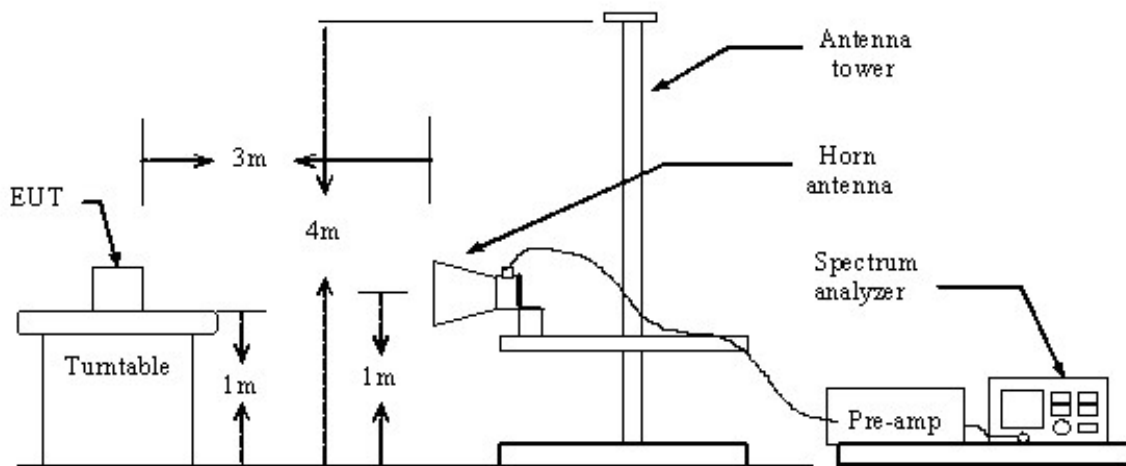

7.3 Limit

According to 15.225,

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Fundamental Frequency (MHz)	Filed Strength at 30m (microvolts/meter)	Filed Strength at 30m (dBuV/m)	Filed Strength at 3m (dBuV/m)
13.553–13.567	15,848	84	124
13.410–13.553 13.567–13.710	334	50.5	90.5
13.110–13.410 13.710–14.010	106	40.5	80.5

According to 15.35, on any frequency or frequencies below or equal to 1000 MHz, the limits Shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test.

According to 15.225,

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dBμV/m)
0.009-0.490	3	$20\log 2400/F \text{ (kHz)} + 80$
0.490-1.705	3	$20\log 24000/F \text{ (kHz)} + 40$
1.705-30	3	$20\log 30 + 40$
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:
- 1) RF Voltage (dBuV) = 20 log RF Voltage (uV)
 - 2) In the Above Table, the tighter limit applies at the band edges.
 - 3) Distance refers to the distance in meters between the measuring instrument antenna and the EUT
 - 4) The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
 - 5) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula $Ld1 = Ld2 * (d2/d1)$

7.4 Test Equipment:

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	July 07, 2013	July 06, 2014
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	July 07, 2013	July 06, 2014
Pre-amplifier	Teseq	LNA6900	--	July 08, 2013	July 07, 2014
Pre-amplifier	Agilent	8447D	83153007374	July 08, 2013	July 07, 2014
Pre-amplifier	Agilent	8449B	3008A01738	July 08, 2013	July 07, 2014
Loop antenna	A.R.A.	PLA-1030/B	1029	July 8, 2013	July 07, 2014
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	July 08, 2013	July 07, 2014

7.5 Test specification:

Environmental conditions: Temperature 23° C Humidity: 50% Atmospheric pressure: 103kPa

7.6 Test result


Result: Pass

The data see the follows:

A Fundamental Radiated Emission

For Horizontal


EUT Description: Bluetooth Stereo Headset
Operation Mode: NFC Tx Mode
Tested By: Beryl Zhao
Test Date: Dec. 18, 2013

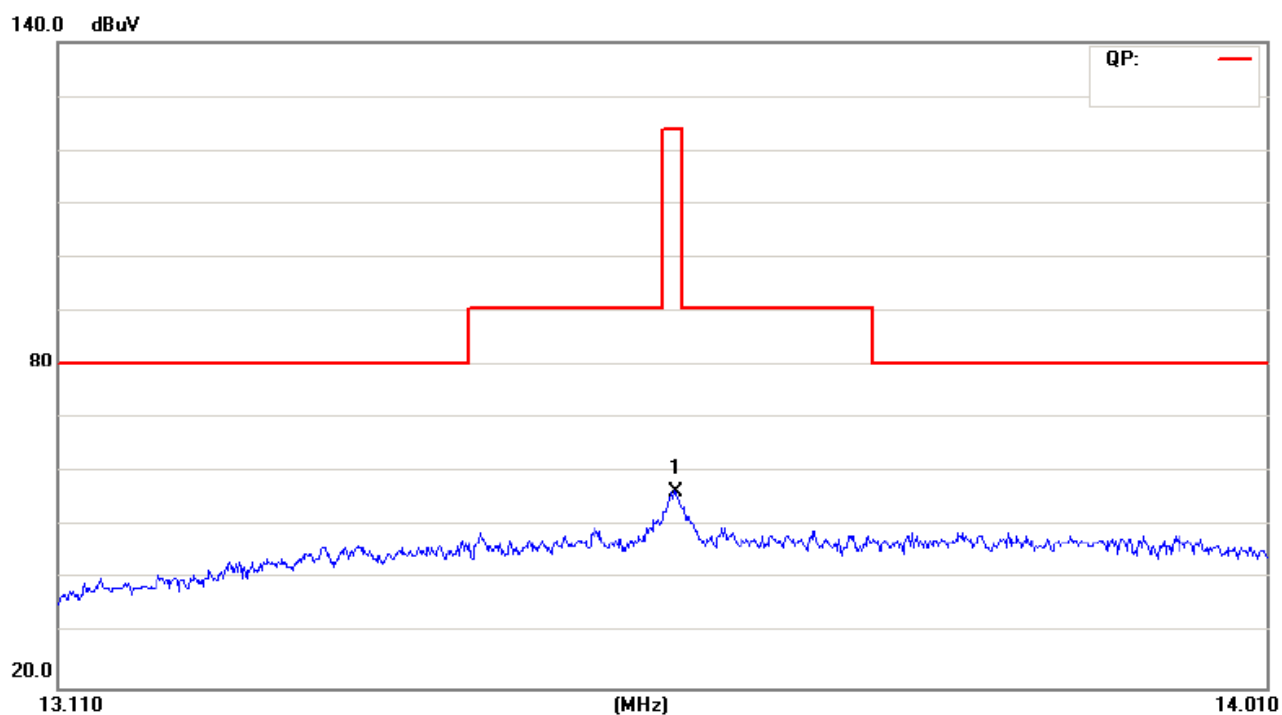

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBμV/m)
13.5628	56.45	H	124.00

For Vertical

EUT Description: Bluetooth Stereo Headset
Operation Mode: NFC Tx Mode
Tested By: Beryl Zhao
Test Date: Dec. 18, 2013

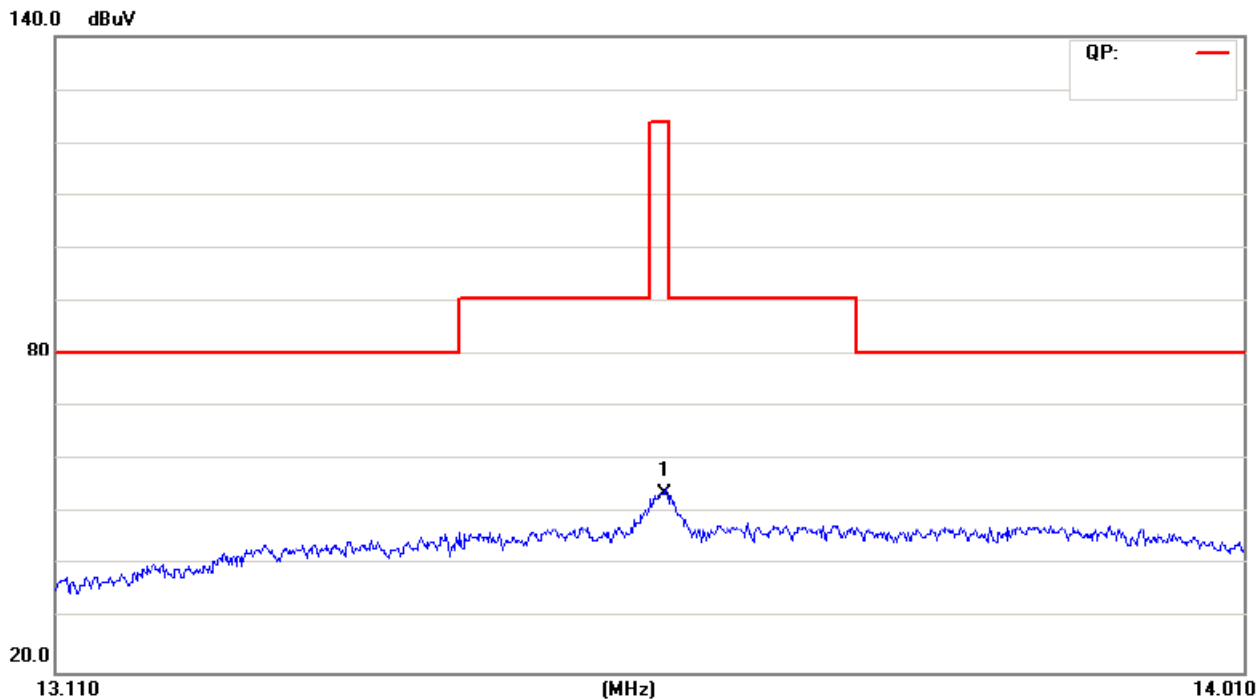

B Spurious Radiated Emission - outside of the 13.110– 14.010 MHz


For 9kHz – 30MHz

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBμV/m)
22.7548	40.15	V	69.5
22.7548	39.46	H	69.5
28.1476	41.78	V	69.5
28.1476	43.50	H	69.5

- Note:
- 1) Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor
 - 2) The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement


For 30Hz – 1000MHz

EUT Description: Bluetooth Stereo Headset
Operation Mode: NFC Tx Mode
Tested By: Beryl Zhao
Test Date: Dec. 18, 2013

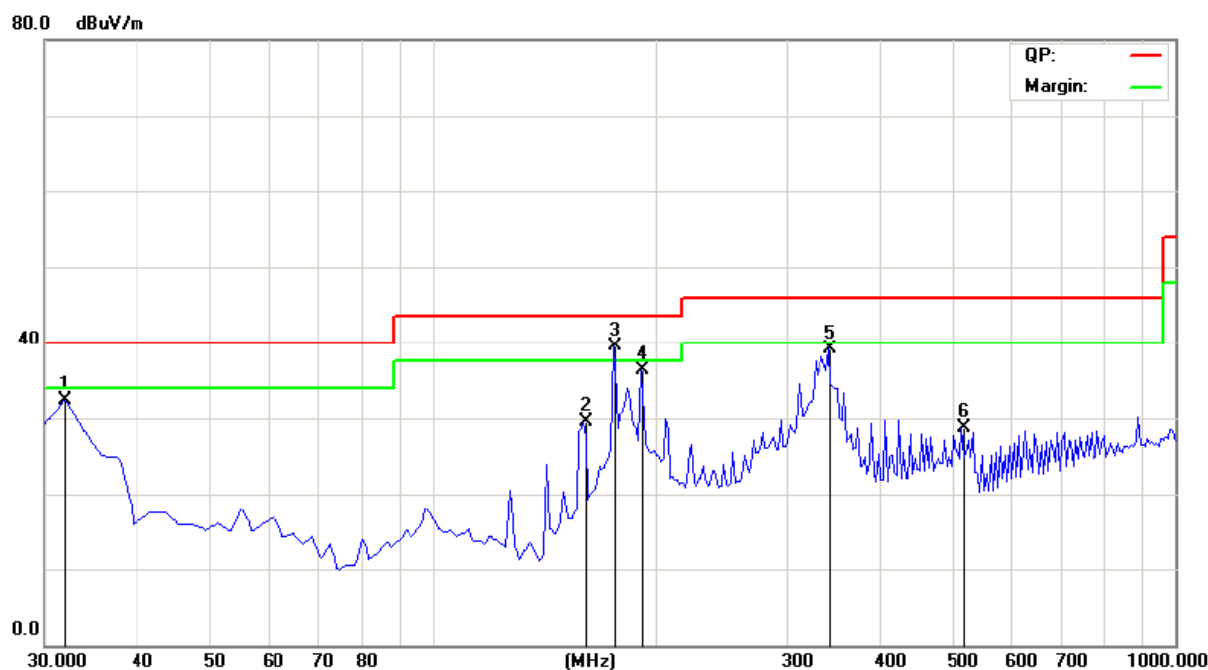

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBμV/m)
31.9437	32.33	H	40.00
160.2403	29.7	H	43.50
175.7915	39.53	H	43.50
191.3427	36.22	H	43.50
342.9658	39.18	H	46.00
519.8595	28.78	H	46.00

EUT Description: Bluetooth Stereo Headset
Operation Mode: NFC Tx Mode
Tested By: Beryl Zhao
Test Date: Dec. 18, 2013

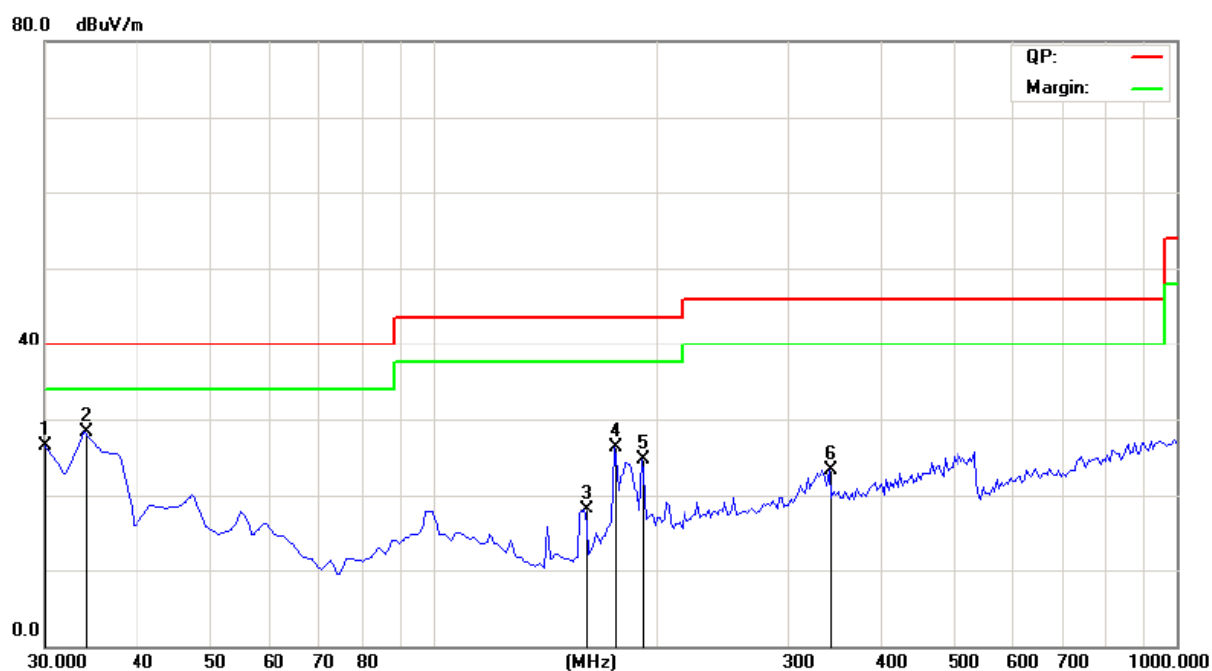

Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dBμV/m)
30.0000	26.42	V	40.00
33.8877	28.30	V	40.00
160.2404	18.05	V	43.50
175.7915	26.38	V	43.50
191.3427	24.79	V	43.50
342.9658	23.21	V	46.00

8.0 Occupied Bandwidth

8.1 Test Equipment

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	July 07, 2013	July 06, 2014

8.2 Test Specification:


Environmental conditions: Temperature 22° C Humidity: 50% Atmospheric pressure: 103kPa

8.3 Limit

According to 15.215(c), Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

8.4 Test Result:

Frequency MHz	20dB Bandwidth (kHz)	Frequency range (MHz) fL > 13.553MHz	Frequency range (MHz) fH < 13.567MHz	Conclusion
13.5628	1.2625	13.5622	13.5634	PASS

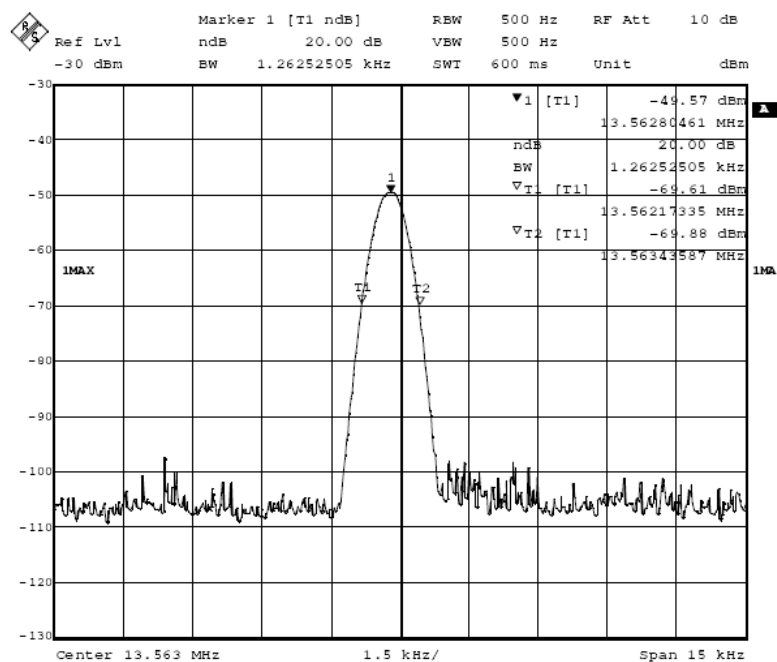

9.0 Frequency Stability Measurement


9.1 Test equipment

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	July 07, 2013	July 06, 2014
Temperature/ Humidity chamber	Shenzhen hongjian	SDJ-80L	SDJ-80J	Feb. 20, 2013	Feb. 19, 2014

9.2 Test Method and test Procedure:

- 1) The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2) EUT have transmitted absence of modulation signal and fixed channelize.
- 3) Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
- 4) Set RBW = 1 kHz, VBW = 1 kHz with peak detector and max hold settings.
- 5) The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
- 6) Extreme temperature rule is -20°C~50°C.

9.3 Block diagram of Test setup

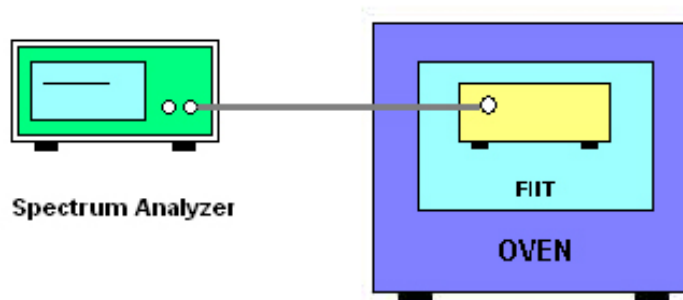

9.4 Test Specification:

Environmental conditions: Temperature 22° C Humidity: 50% Atmospheric pressure: 103kPa

9.5 Limit

According to 15.225(e), The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

9.6 Test Result:

Pass

Operating frequency: 13.5628MHz

Voltage vs. Frequency Stability (Test Temperature: 20°C)

Voltage(V)	Measurement Frequency (MHz)	Max. Deviation (MHz)	Limit(MHz)	Conclusion
3.7	13.56286	0.00011	0.001356	Pass
3.145	13.56284			
4.255	13.56291			

Temperature vs. Frequency Stability (Test Voltage: 3.7V)

Voltage(V)	Measurement Frequency (MHz)	Max. Deviation (MHz)	Limit(MHz)	Conclusion
-20°C	13.56279	0.00018	0.001356	Pass
-10°C	13.56286			
0°C	13.56284			
10°C	13.56289			
20°C	13.56285			
30°C	13.56290			
40°C	13.56294			
50°C	13.56298			


10.0 Antenna Requirement

10.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 Antenna Specification

According to the manufacturer declared, the EUT has a loop antenna;

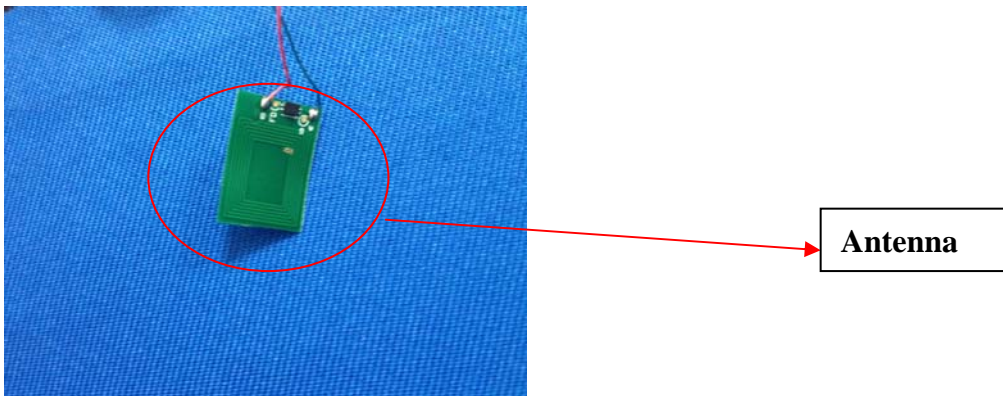

--End of the report--