


FCC RADIO TEST REPORT

Prepared For	STB Developments Limited
Product Name:	TABLET PC
Trade Name:	AVOCA
Model Name :	STB8098
FCC ID:	2ABDHSTB8098
Prepared By	DongGuan Precise Testing Service Co.,Ltd.
	F616A Room, 6th Floor, Meixin Business Center, Dongcheng Middle Road, Dongguan, Guangdong, China
Report No.	PTS201311083F
Test Date:	Nov.10, 2012 ~ Nov.17, 2013
Date of Report :	Nov.17, 2013

VERIFICATION OF COMPLIANCE


Applicant:	STB Developments Limited
Address	6 Waterside Business Park Livingstone Road ,Hessle,HU130EG, United Kingdom
Manufacturer Name:	GUANGZHOU C&Q TELECOM EQUIPMENT CO.,LTD
Address:	GUANGZHOU C&Q TELECOM EQUIPMENT CO.,LTD
Product Description:	TABLET PC
Brand Name:	AVOCA
Model Name:	STB8098
Model difference:	N/A
Test procedure	ANSI C63.4:2003
Standards	FCC Part15.247:2012

Prepared by :




Assistant

Reviewer :



Supervisor

Approved & Authorized Signer :



Jacky Ou / Manager

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS	20
3.2.6 TEST RESULTS	21
4 . POWER SPECTRAL DENSITY TEST	35
4.1 APPLIED PROCEDURES / LIMIT	35
4.1.1 TEST PROCEDURE	35
4.1.2 DEVIATION FROM STANDARD	35
4.1.3 TEST SETUP	35
4.1.4 EUT OPERATION CONDITIONS	35
4.1.5 TEST RESULTS	36
5 . BANDWIDTH TEST	42
5.1 APPLIED PROCEDURES / LIMIT	42
5.1.1 TEST PROCEDURE	42
5.1.2 DEVIATION FROM STANDARD	42

Table of Contents

	Page
5.1.3 TEST SETUP	42
5.1.4 EUT OPERATION CONDITIONS	42
5.1.5 TEST RESULTS	43
6 . PEAK OUTPUT POWER TEST	49
6.1 APPLIED PROCEDURES / LIMIT	49
6.1.1 TEST PROCEDURE	49
6.1.2 DEVIATION FROM STANDARD	49
6.1.3 TEST SETUP	49
6.1.4 EUT OPERATION CONDITIONS	49
6.1.5 TEST RESULTS	50
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	51
7.1 DEVIATION FROM STANDARD	51
7.2 TEST SETUP	51
7.3 EUT OPERATION CONDITIONS	51
7.4 TEST RESULTS	52
8 . ANTENNA REQUIREMENT	56
8.1 STANDARD REQUIREMENT	56
8.2 EUT ANTENNA	56
9 . EUT TEST PHOTO	57
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Address: 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.: 238937; IC Registration No.: 9270A-1

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated (<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated (>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	TABLET PC	
Trade Name	AVOCA	
Model Name	STB8098	
Serial Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a TABLET PC	
	Operation Frequency:	802.11b/g/n:2412~2462 MHz
	Modulation Type:	CCK/OFDM/DBPSK/DAPSK
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n: 78/52/6.5Mbps
	Number Of Channel	802.11b/g/n: 11CH
	Antenna Designation:	Please see Note 3.
	Output Power(Conducted):	802.11b: 10.99 dBm (Max.) 802.11g: 9.95 dBm (Max.) 802.11n: 9.53 dBm (Max.)
	Antenna Gain (dBi)	1.0dBi
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Ratings	DC 5V from adapter AC120V/60Hz	
Adapter	Model: SW106-W0502000A INPUT:AC100-240V,50/60Hz OUTPUT: 5V,2A	
Battery	Rated Voltage:3.7V Charge Limit:4.2V	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g/n

Channel	Frequency (MHz)						
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3.

Table for Filed Antenna

Ant .	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	FPCB Antenna	NA	1.0	Wifi Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n CH1/ CH6/ CH11
Mode 4	Link Mode

For Conducted Emission	
Final Test Mode	Description
Mode 4	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n CH1/ CH6/ CH11
Mode 4	Link Mode

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test



Radiated Spurious Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	TABLET PC	AVOCA	STB8098	N/A	EUT
E-2	Adapter	N/A	SW106-W0502000A	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.0m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2013.07.06	2014.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2013.06.07	2014.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2013.07.06	2014.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2013.06.07	2014.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2013.06.07	2014.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2013.07.06	2014.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2013.07.06	2014.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2012.12.22	2013.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2013.06.08	2014.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2013.07.06	2014.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2013.07.06	2014.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2013.06.06	2014.06.05	1 year
2	LISN	R&S	ENV216	101313	2013.08.24	2014.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2013.08.24	2014.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2013.06.07	2014.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2013.06.07	2014.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2013.06.08	2014.06.07	1 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

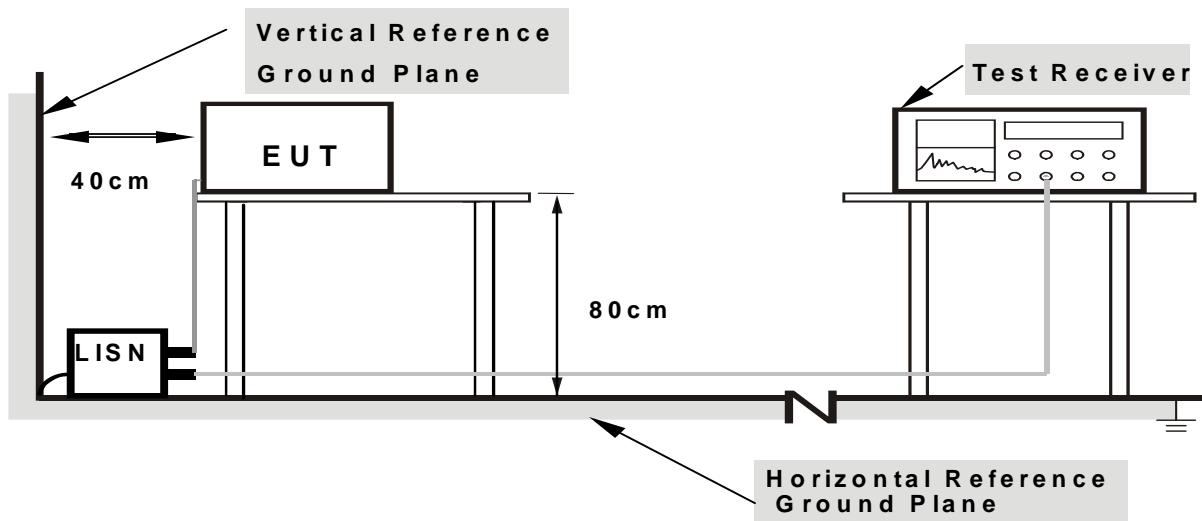

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	TABLET PC	Model Name. :	STB8098
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from adapter AC120V/60Hz	Test Mode :	Mode 4

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V)	Limits (dB μ V)	Margin (dB)	Detector Type
0.1580	28.99	11.36	40.35	65.56	-25.21	QP
0.2340	28.47	10.77	39.24	62.30	-23.06	QP
0.5500	27.68	10.56	38.24	56.00	-17.76	QP
1.7140	31.49	10.52	42.01	56.00	-13.99	QP
11.9979	25.98	10.87	36.85	60.00	-23.15	QP
14.8419	23.14	10.92	34.06	60.00	-25.94	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

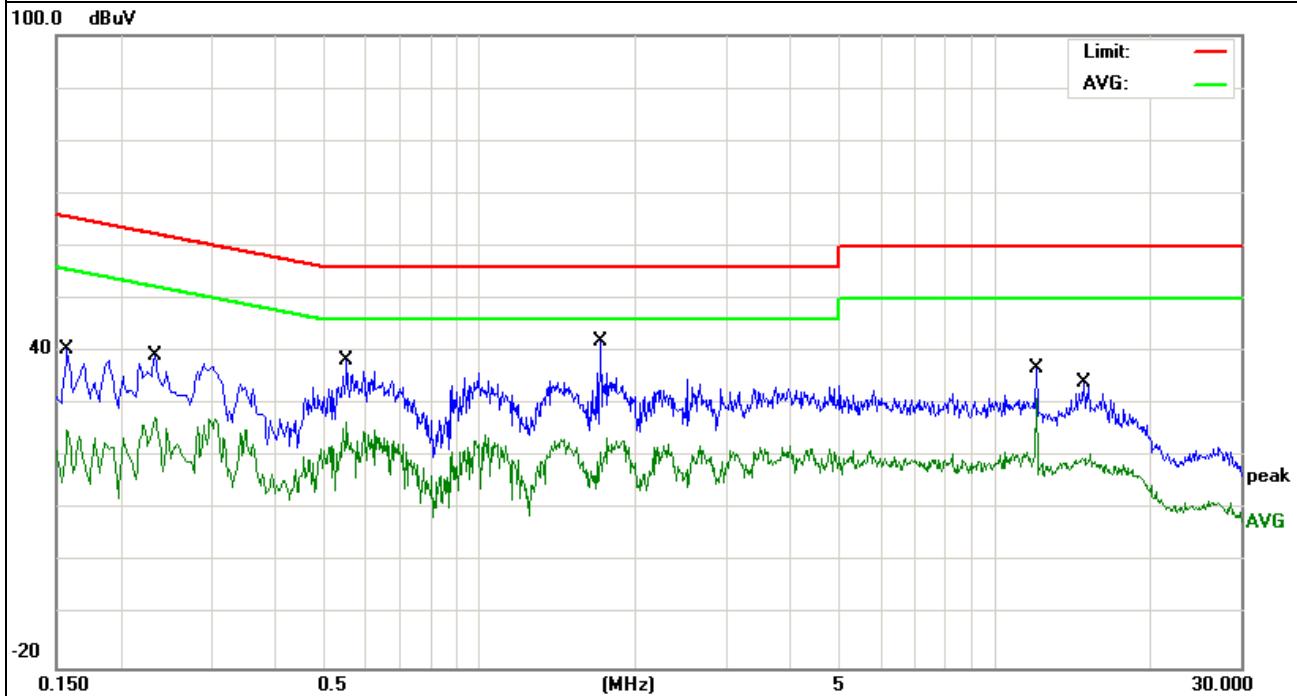


EUT :	TABLET PC	Model Name. :	STB8098
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from adapter AC120V/60Hz	Test Mode :	Mode 4

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V)	(dB μ V)	(dB)	
0.3060	28.68	10.94	39.62	60.08	-20.46	QP
0.6180	27.50	10.55	38.05	56.00	-17.95	QP
1.3340	27.48	10.52	38.00	56.00	-18.00	QP
2.5020	27.17	10.54	37.71	56.00	-18.29	QP
3.4460	25.32	10.57	35.89	56.00	-20.11	QP
12.0019	19.52	10.87	30.39	60.00	-29.61	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

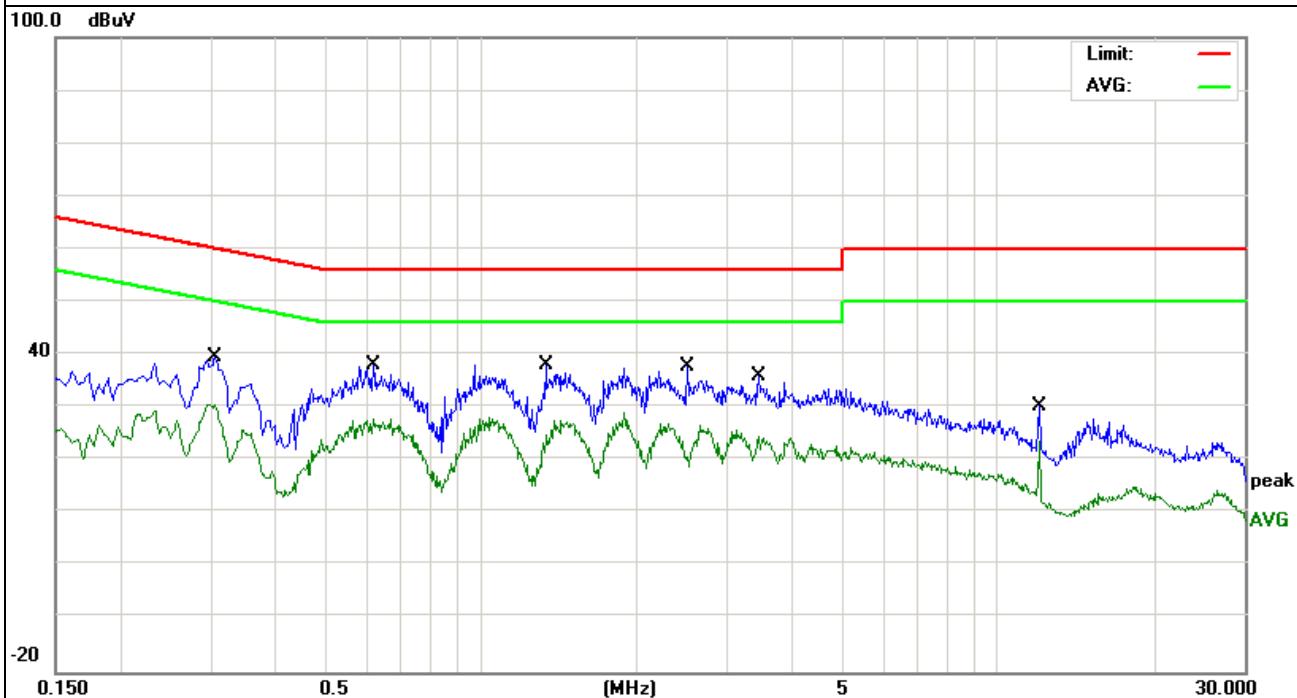

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

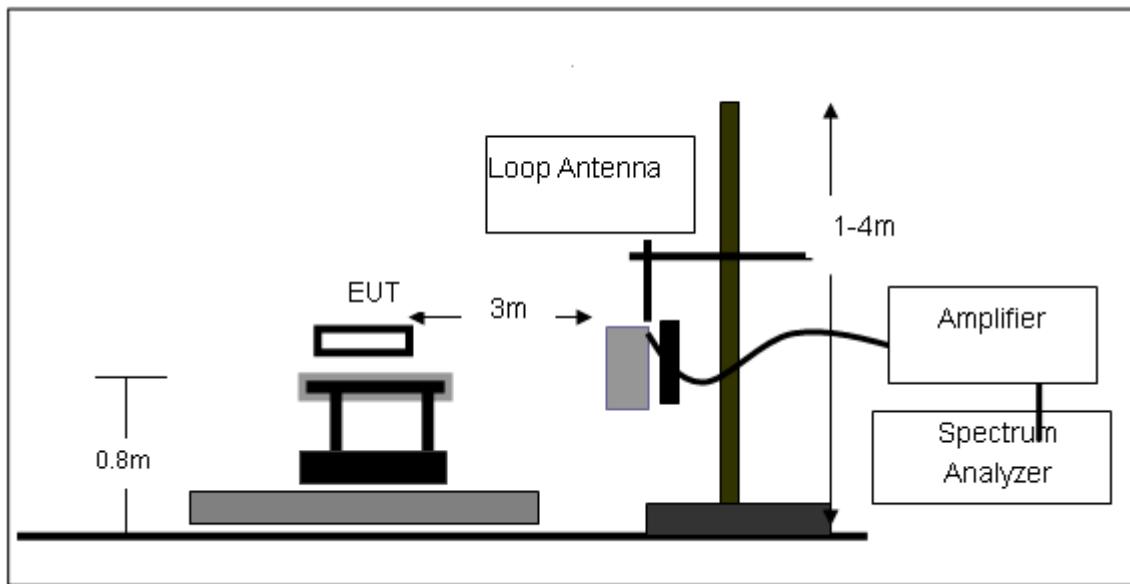

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

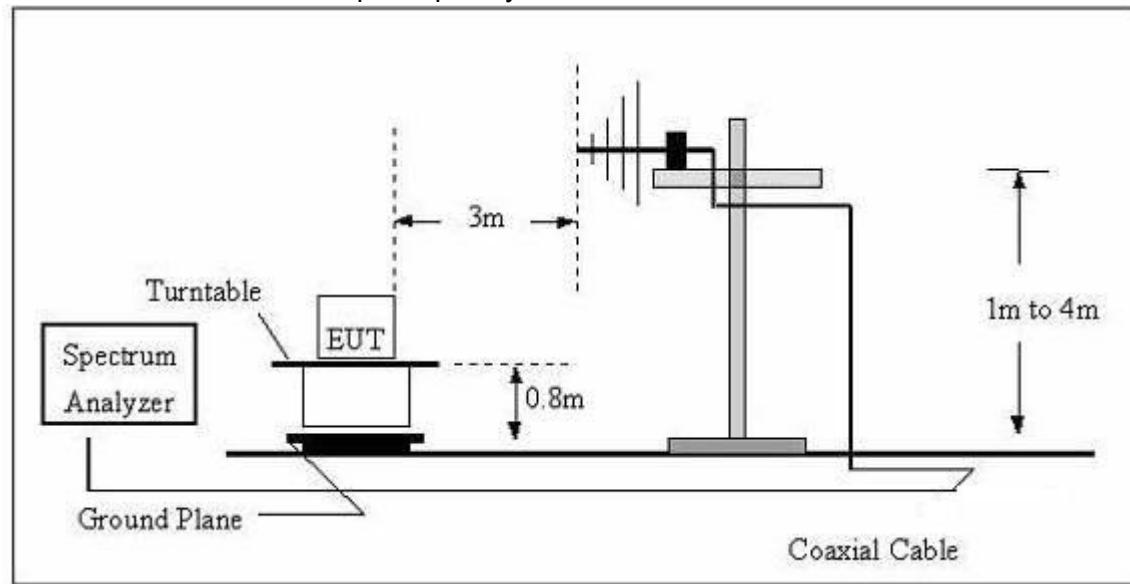

(C) Radiated Emission Test-Up Frequency Above 1GHz

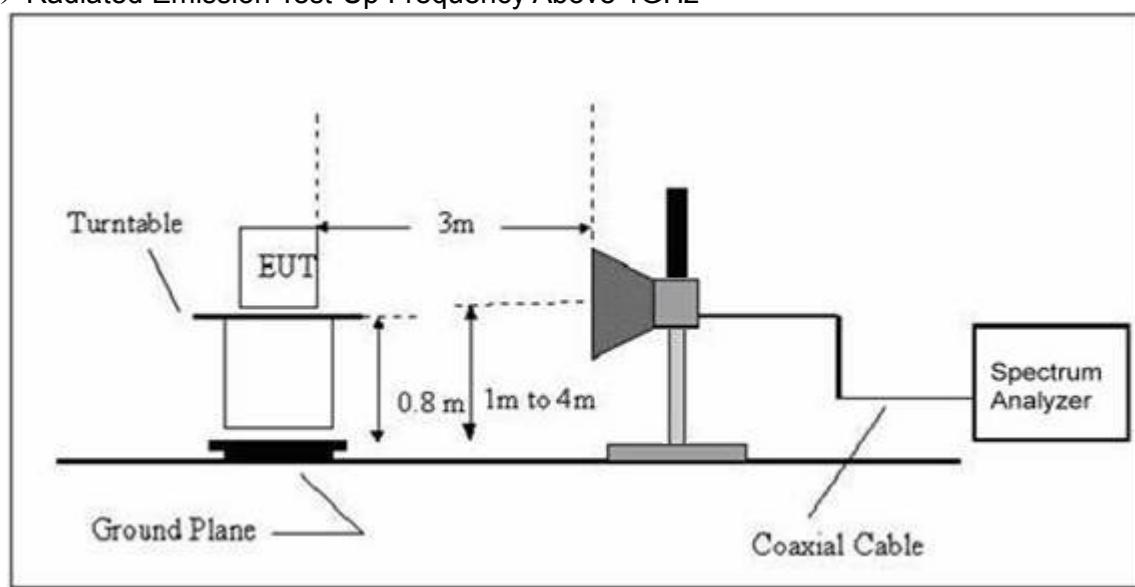

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS

9K-30MHz

EUT:	TABLET PC	Model Name. :	STB8098
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 4	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dB _{UV} /m)	(dB _{UV} /m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dB_{UV}) + distance extrapolation factor.


Radiated Spurious Emission (30M-1GHz)

EUT :	TABLET PC	Model Name :	STB8098
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Power :	DC 5V from adapter AC120V/60Hz	Test Mode :	Mode 4

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
82.3588	26.45	8.17	34.62	40.00	-5.38	QP
131.7576	23.61	12.22	35.83	43.50	-7.67	QP
148.4410	24.57	11.83	36.40	43.50	-7.10	QP
164.9074	26.46	10.81	37.27	43.50	-6.23	QP
263.8190	22.98	14.62	37.60	46.00	-8.40	QP
346.8091	17.22	16.28	33.50	46.00	-12.50	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

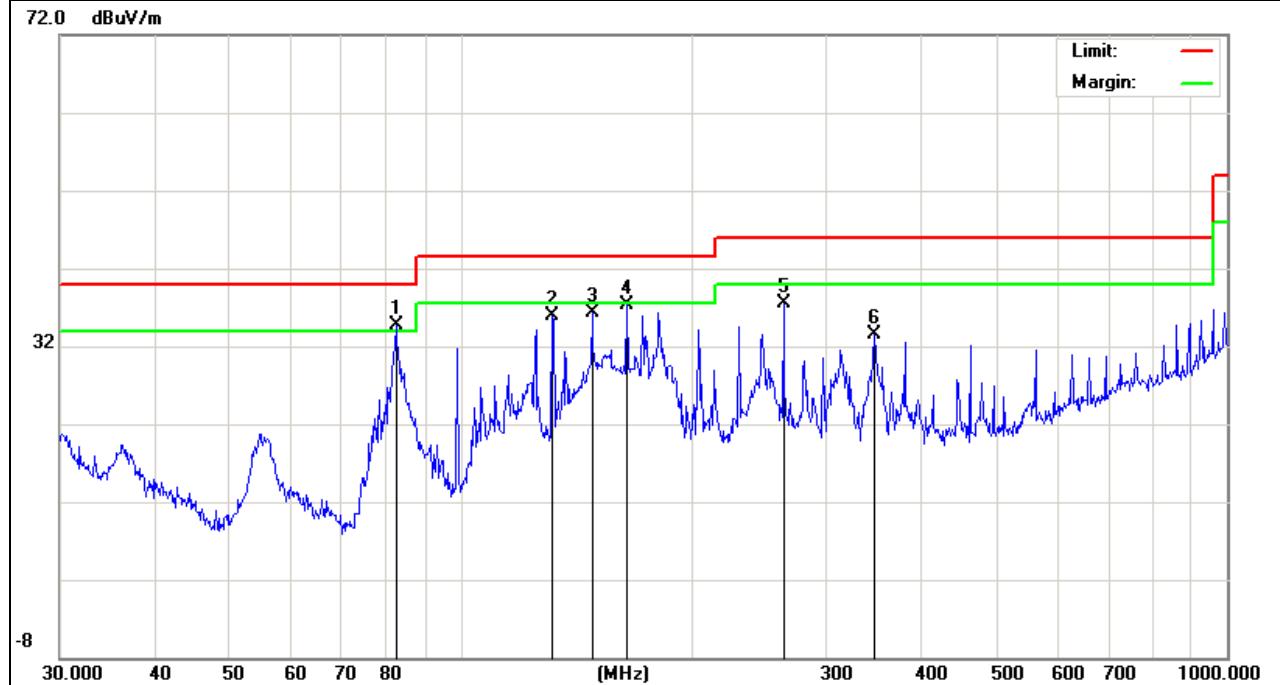


EUT :	TABLET PC	Model Name :	STB8098
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Power :	DC 5V from adapter AC120V/60Hz	Test Mode :	Mode 4

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
36.3813	12.87	15.19	28.06	40.00	-11.94	QP
82.3588	20.45	8.17	28.62	40.00	-11.38	QP
98.8324	20.57	10.51	31.08	43.50	-12.42	QP
131.7576	28.09	12.22	40.31	43.50	-3.19	QP
148.4410	28.06	11.83	39.89	43.50	-3.61	QP
263.8190	18.50	14.62	33.12	46.00	-12.88	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

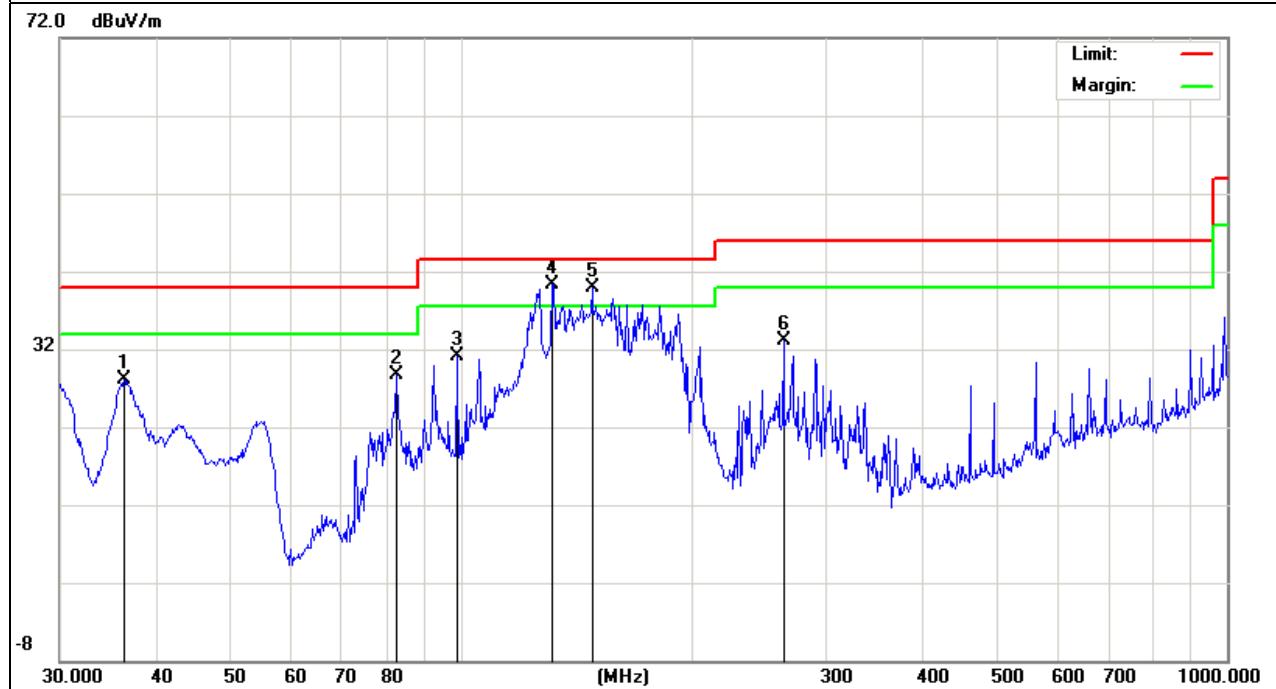

Radiated Spurious Emission



1GHz~25GHz:(Scan with 802.11b, 802.11g, 802.11n), the worst case is 802.11b.

Low Channel (2412 MHz)-Above 1G-802.11B							
2491.777	59.40	-11.65	47.75	74	-26.25	Pk	Vertical
2498.247	56.30	-12.73	43.57	74	-30.43	Pk	Horizontal
4823.884	56.40	-3.60	52.8	74	-21.2	Pk	Vertical
4823.749	56.40	-9.23	44.54	74	-29.46	Pk	Horizontal
1485.838	60.10	-17.10	43.00	74	-31.00	Pk	Vertical
1636.784	59.79	-16.06	43.73	74	-30.27	Pk	Vertical
2095.928	58.60	-11.88	46.72	74	-27.28	Pk	Vertical
1074.301	60.33	-19.69	40.64	74	-33.36	Pk	Horizontal
1483.178	59.32	-17.09	42.23	74	-31.77	Pk	Horizontal
1895.832	56.34	-14.25	42.09	74	-31.91	Pk	Horizontal
Mid Channel (2437 MHz)-Above 1G-802.11B							
2474.777	56.14	-11.65	44.49	74	-29.51	Pk	Vertical
2474.144	56.83	-9.37	47.46	74	-26.54	Pk	Horizontal
4874.425	56.21	-6.15	47.47	74	-26.53	Pk	Vertical
4874.979	56.21	-6.83	49.38	74	-24.62	Pk	Horizontal
1433.535	63.20	-17.12	46.08	74	-27.92	Pk	Vertical
1636.784	60.53	-16.06	44.47	74	-29.53	Pk	Vertical
2284.166	54.27	-12.83	41.44	74	-32.56	Pk	Vertical
1280.515	59.93	-17.82	42.11	74	-31.89	Pk	Horizontal
1636.784	58.76	-16.06	42.7	74	-31.3	Pk	Horizontal
1892.438	58.88	-14.28	44.6	74	-29.4	Pk	Horizontal
High Channel (2462 MHz)- Above 1G-802.11B							
2453.883	56.89	-12.91	43.98	74	-30.02	Pk	Vertical
2453.839	56.89	-11.59	44.65	74	-29.35	Pk	Horizontal
4924.325	53.40	-9.22	44.18	74	-29.82	Pk	Vertical
4924.683	53.40	-3.64	49.62	74	-24.38	Pk	Horizontal
1187.688	57.92	-18.27	39.65	74	-34.35	Pk	Vertical
1636.784	56.73	-16.06	40.67	74	-33.33	Pk	Vertical
2084.693	54.32	-11.99	42.33	74	-31.67	Pk	Vertical
1534.540	56.98	-16.94	40.04	74	-33.96	Pk	Horizontal
1786.985	56.69	-15.04	41.65	74	-32.35	Pk	Horizontal
1892.438	56.57	-14.28	42.29	74	-31.71	Pk	Horizontal



NOTE: The result(PK) less than AV limite, No need shown AV result.

Conducted Spurious Emissions at Antenna Port:



802.11b Low Channel

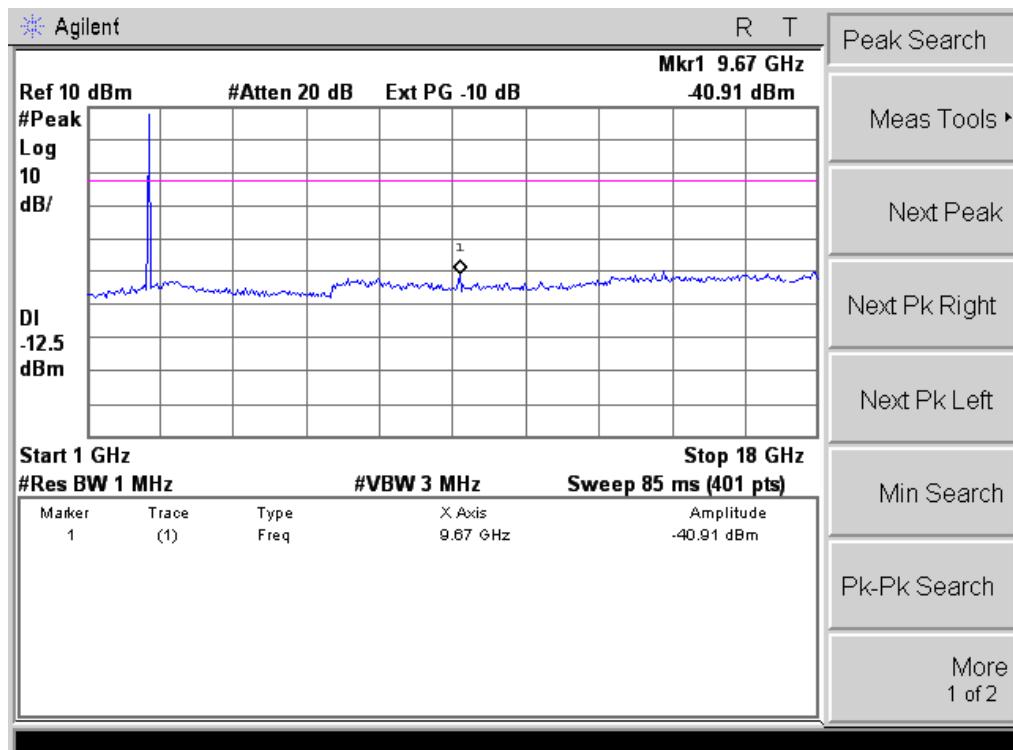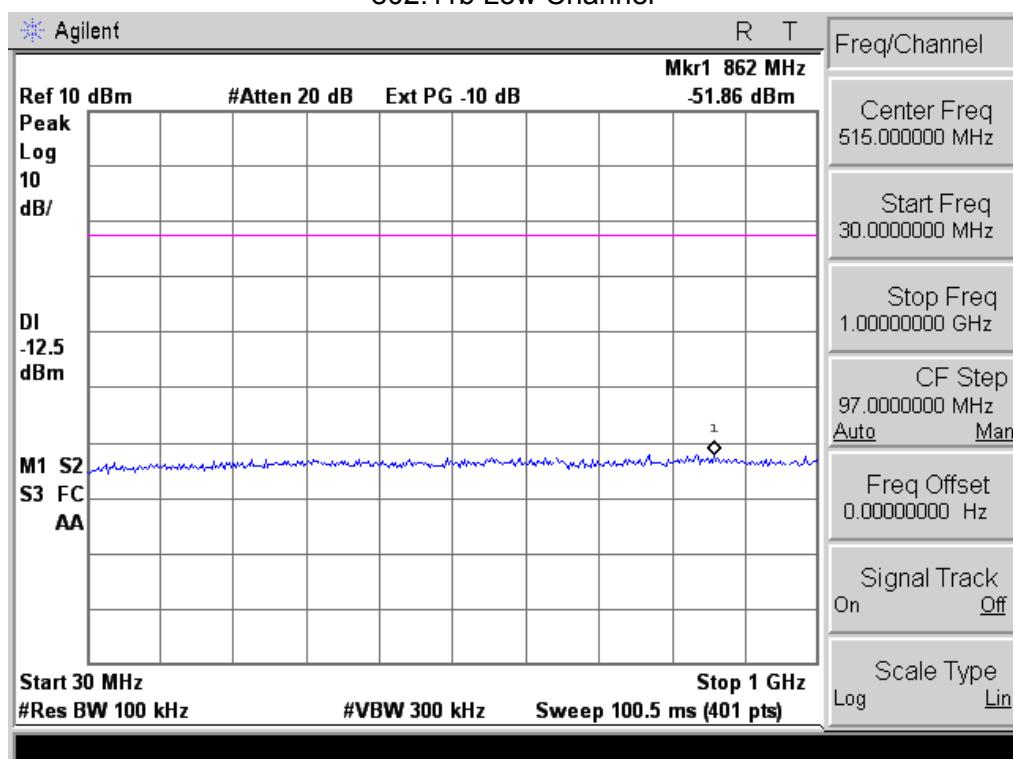



802.11b Middle Channel

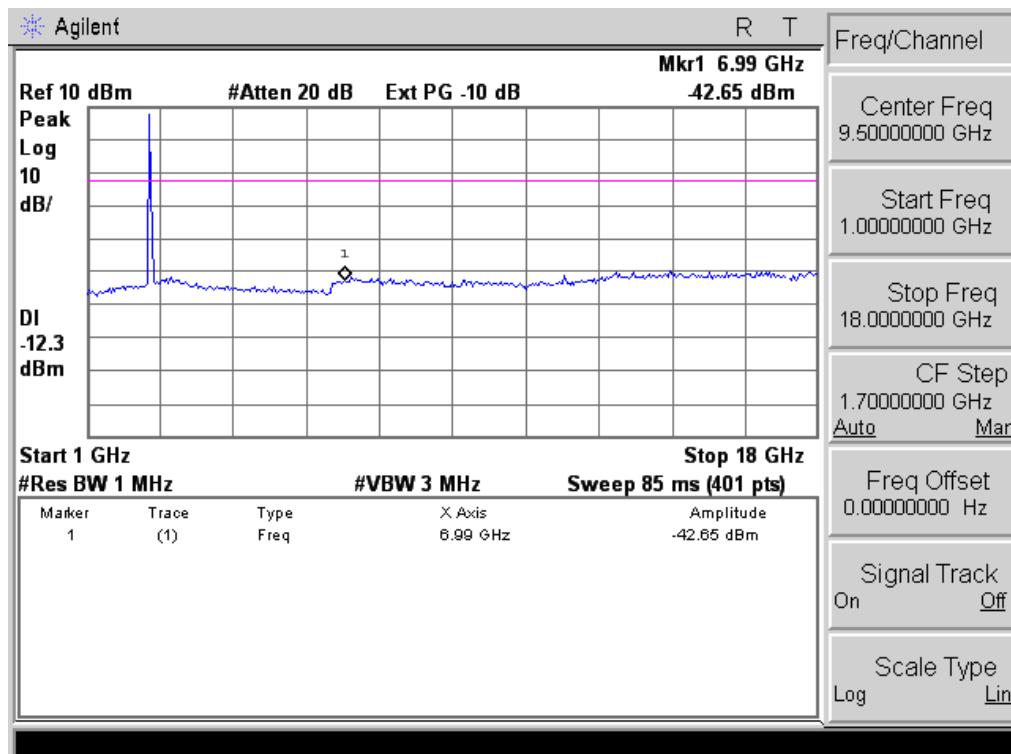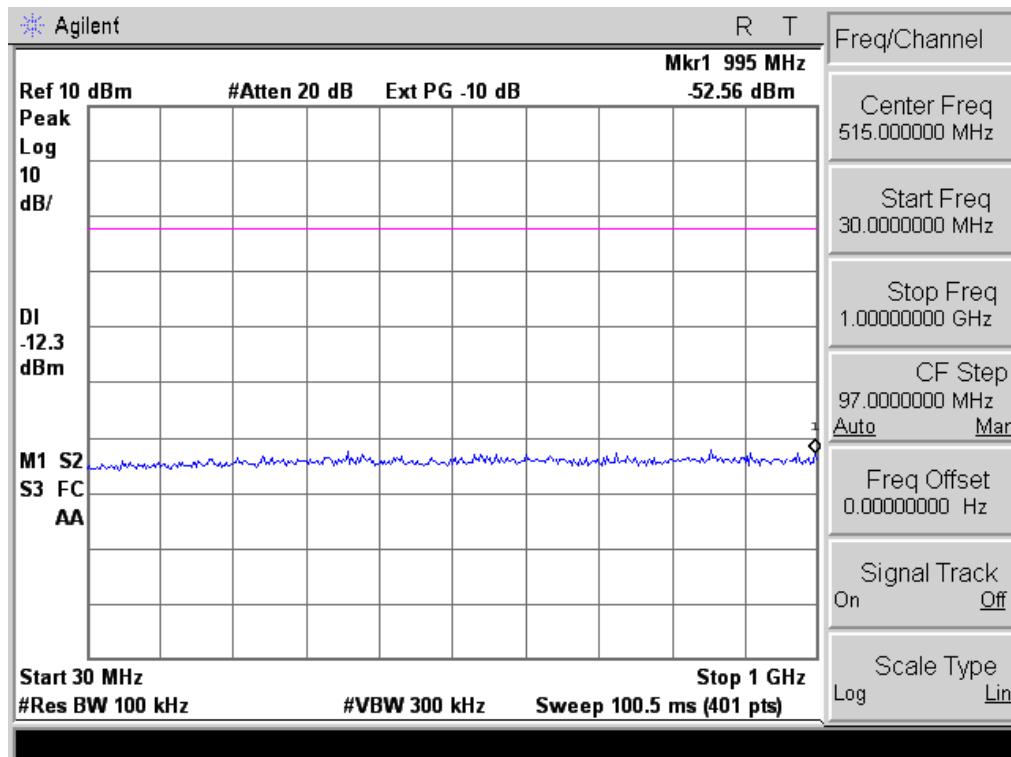



802.11b High Channel

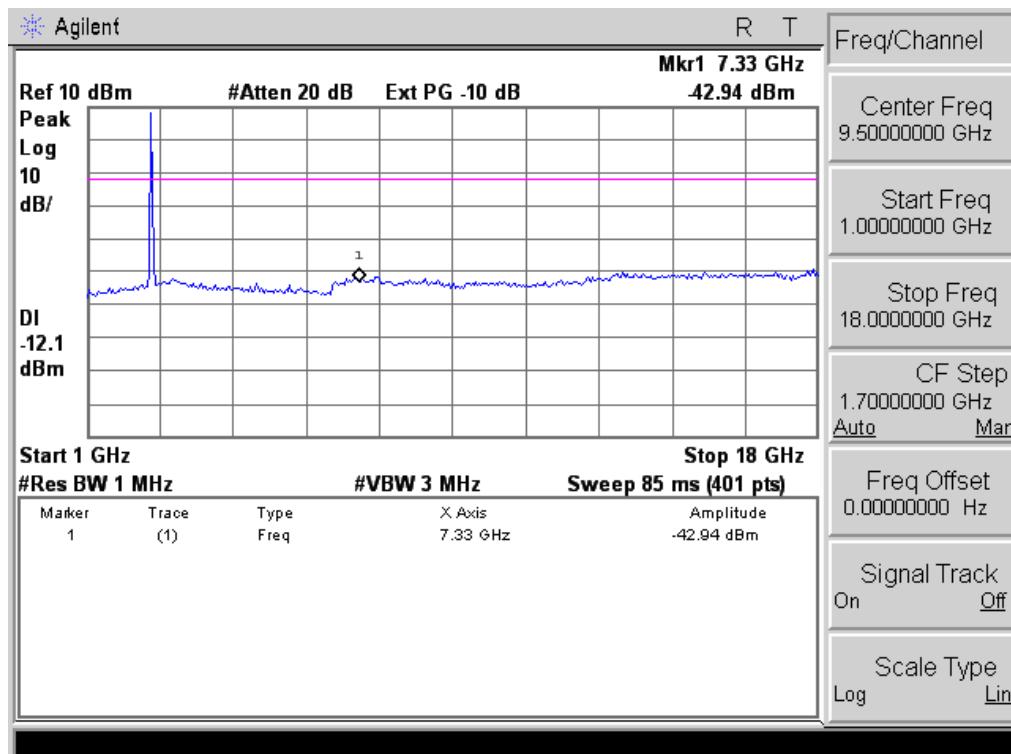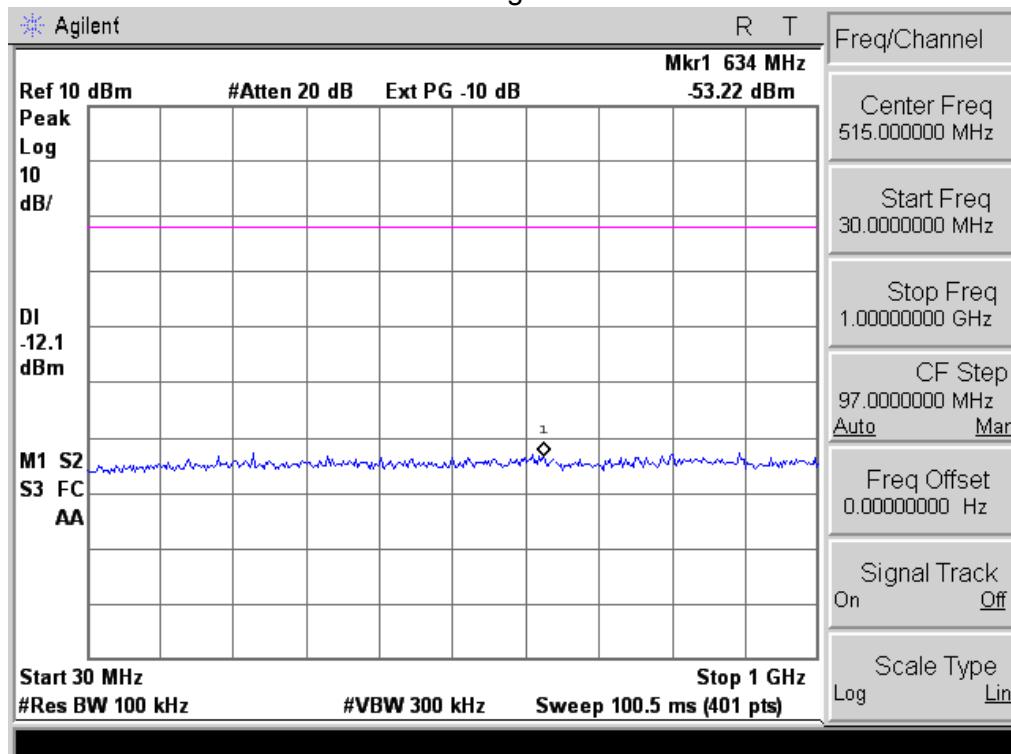



802.11g Low Channel

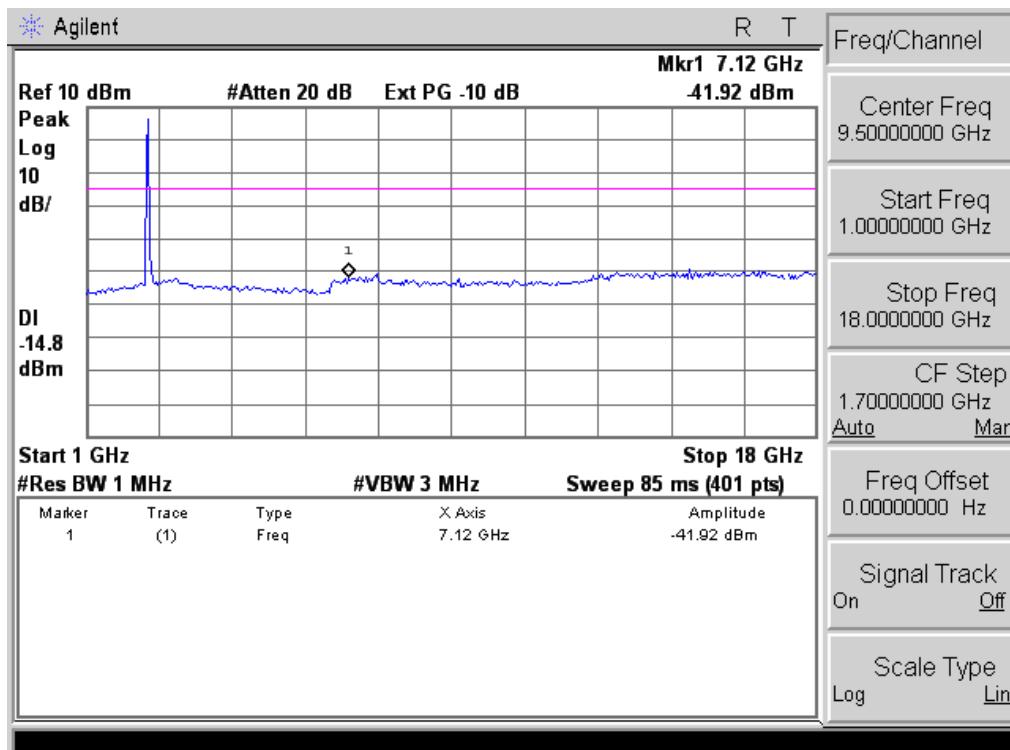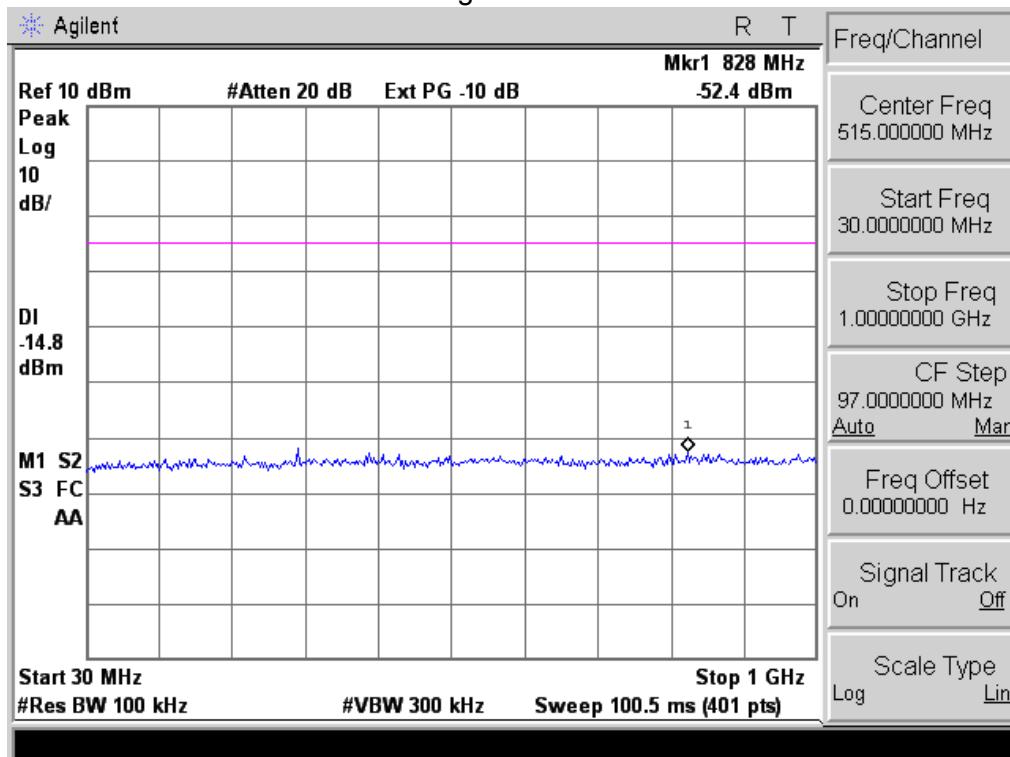



802.11g Middle Channel

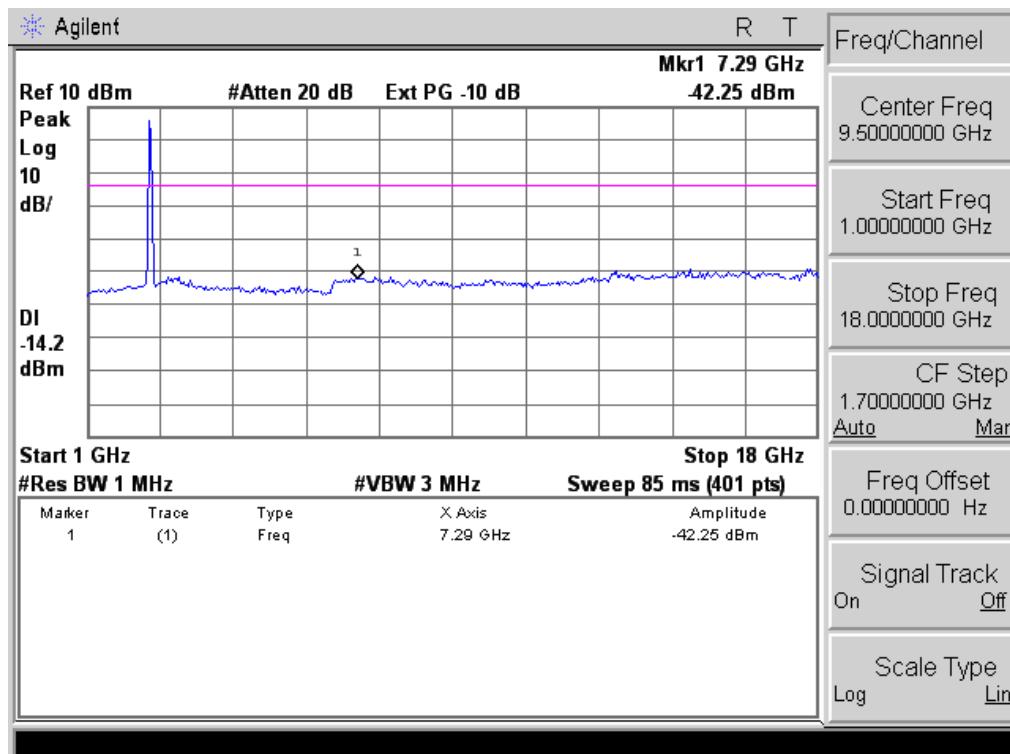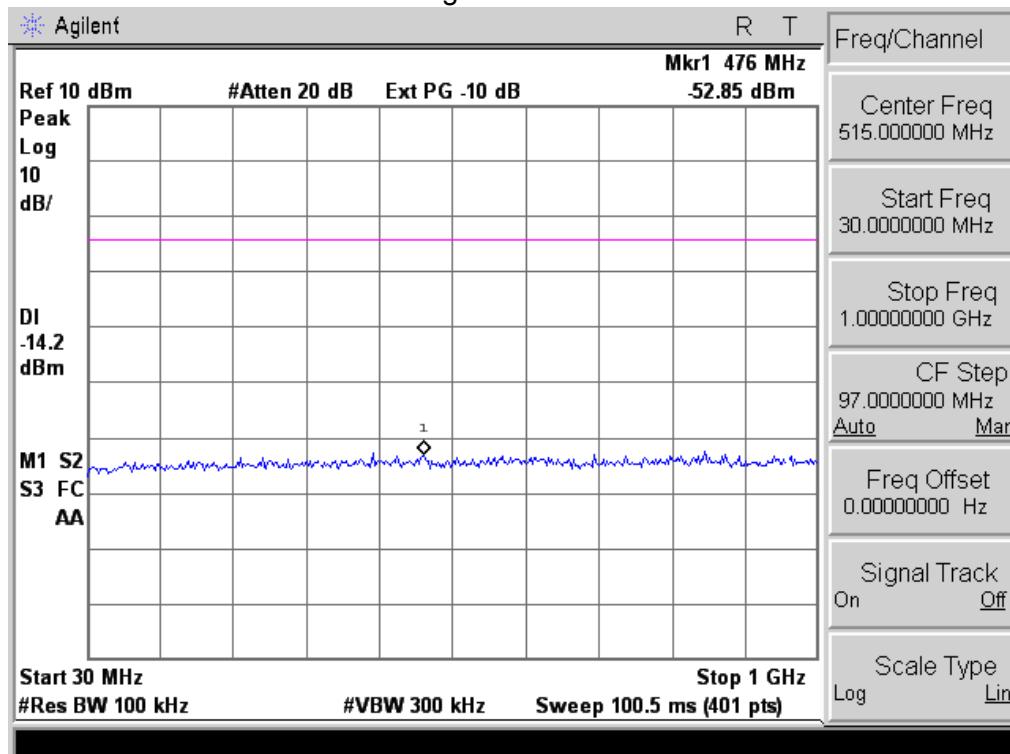



802.11g High Channel

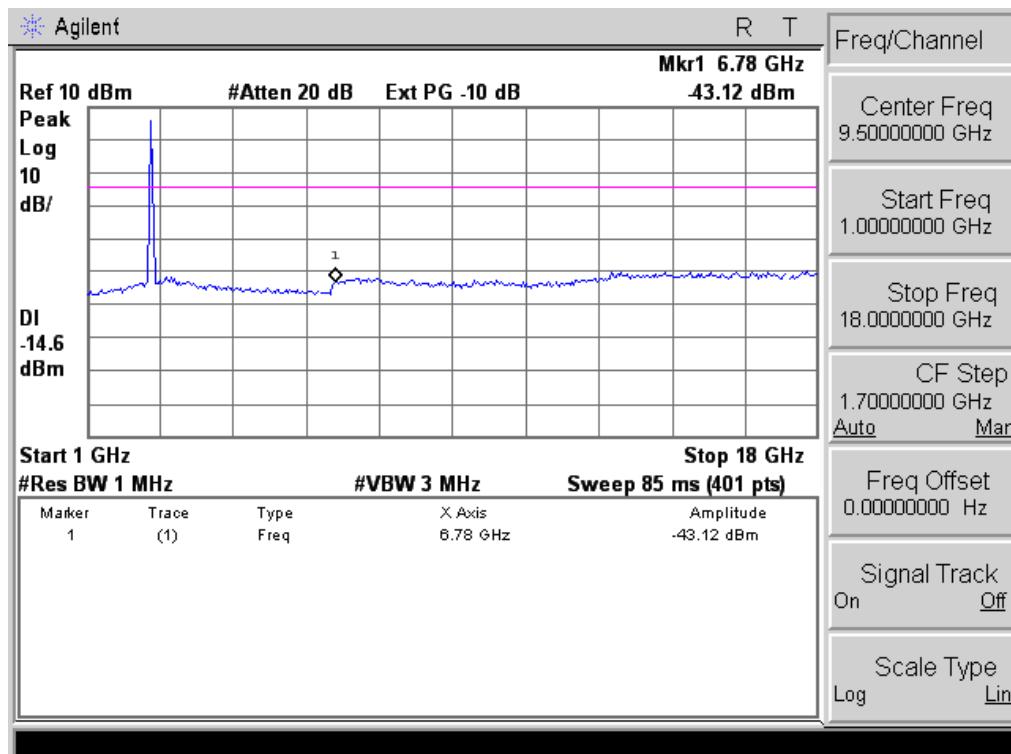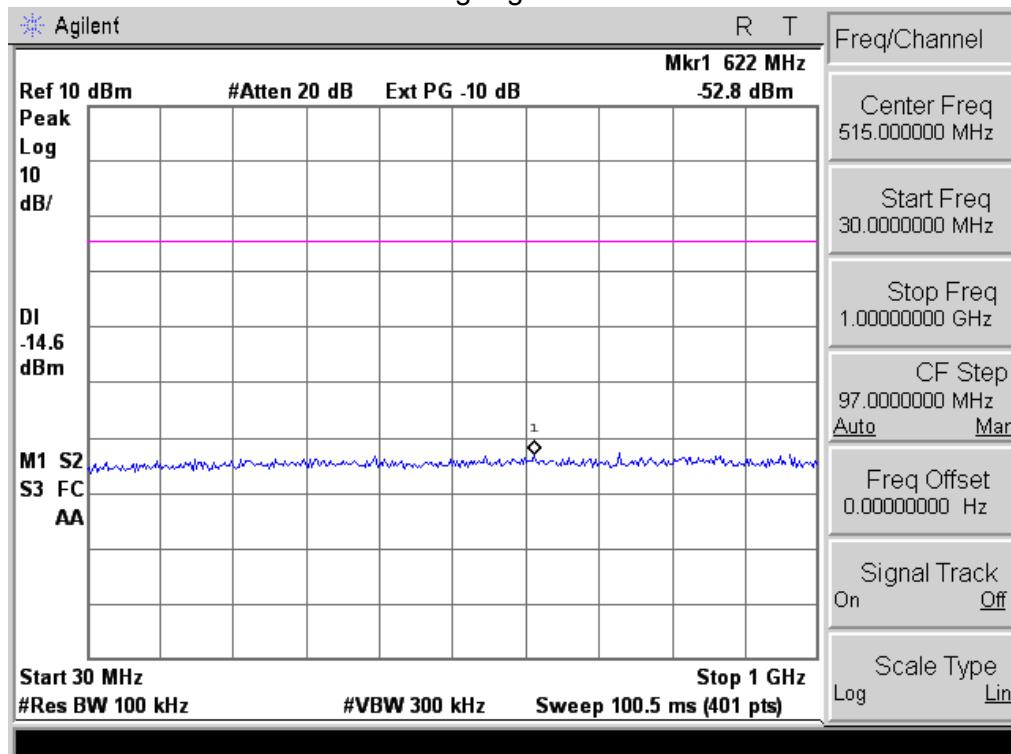



802.11n Low Channel

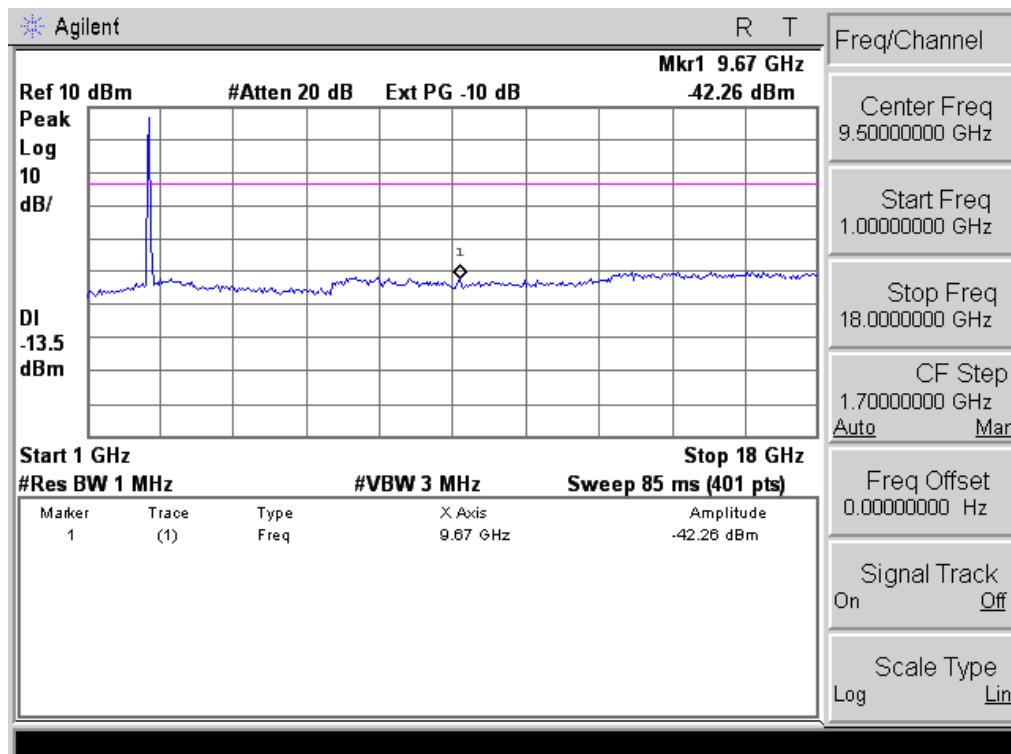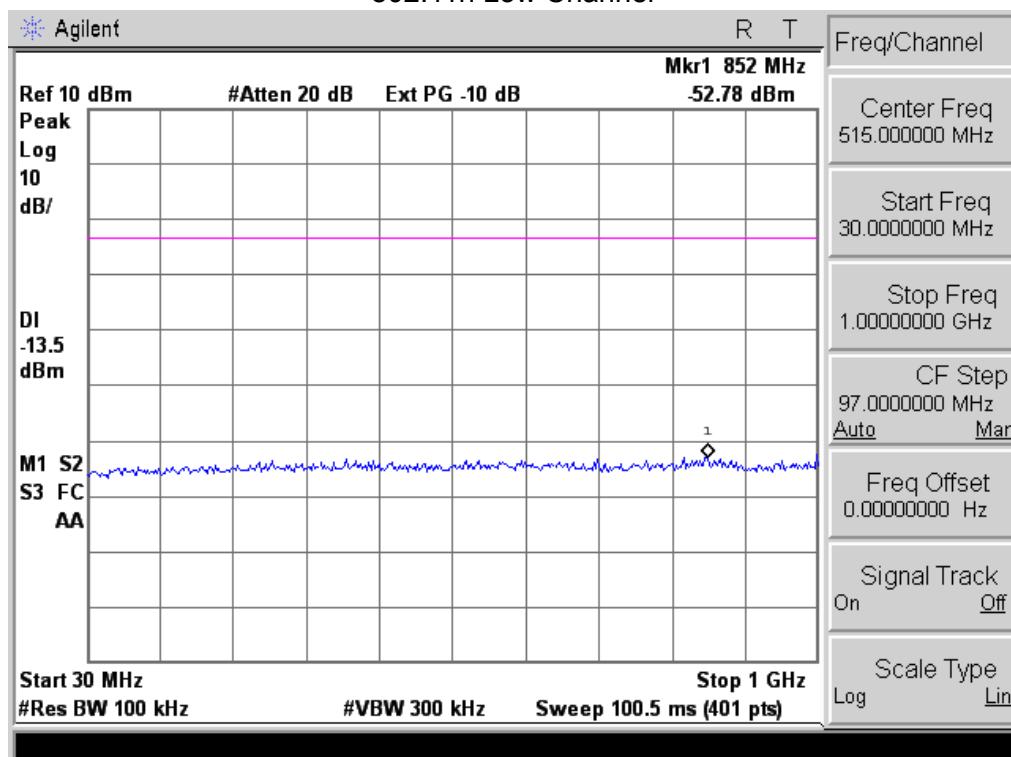

802.11n Middle Channel

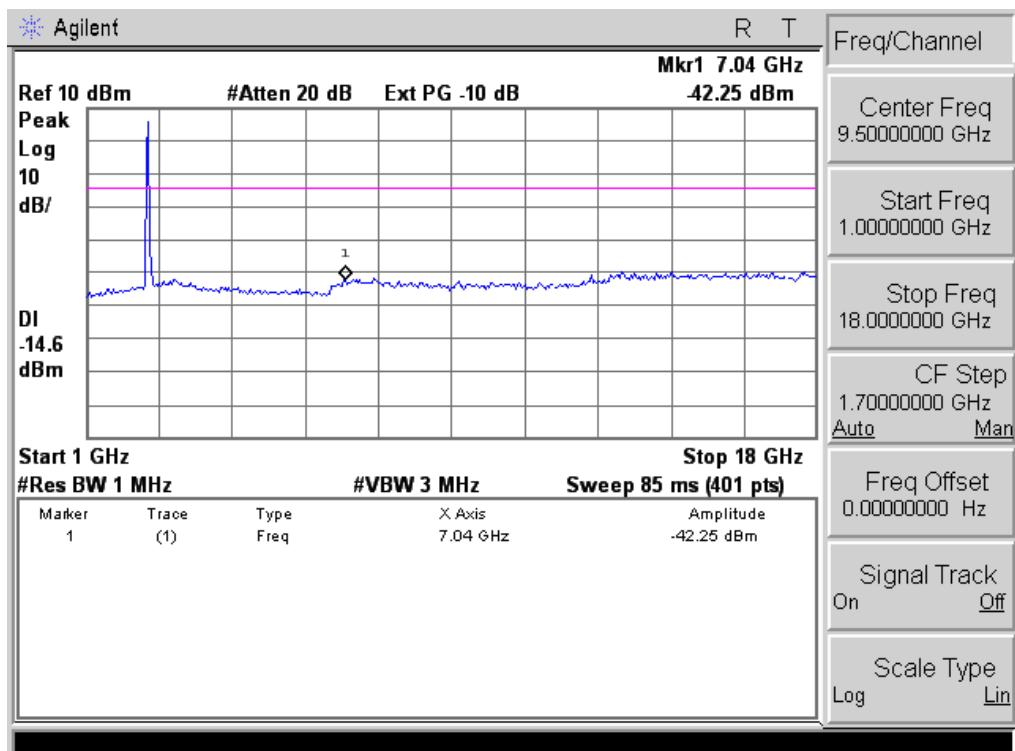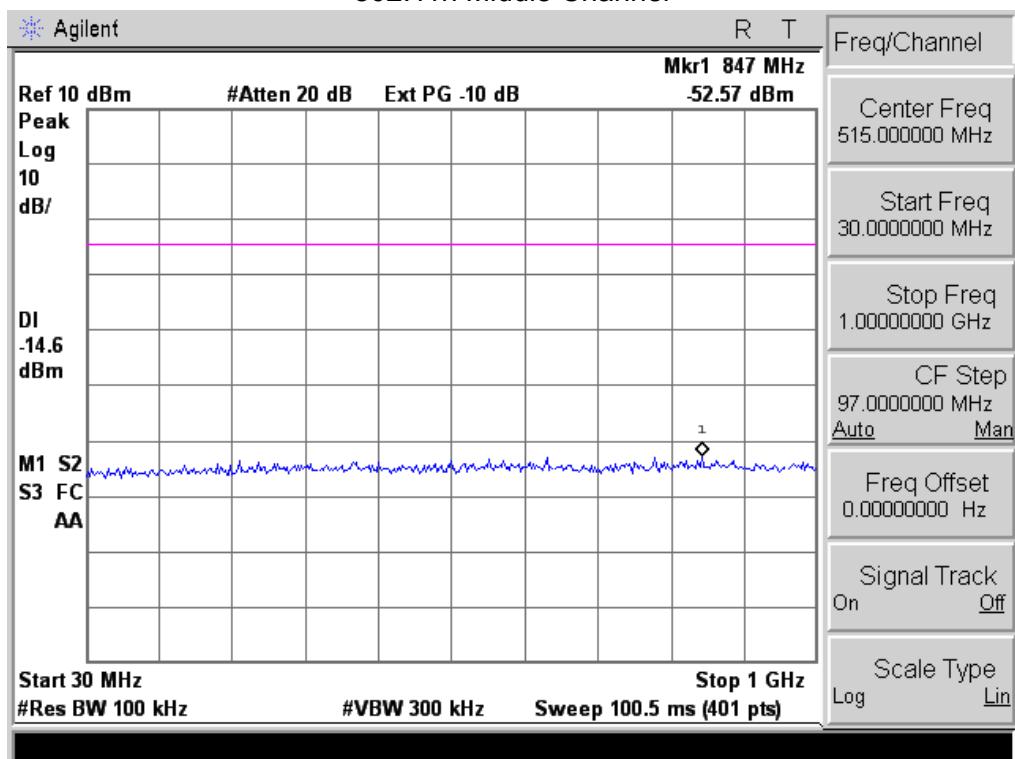

802.11n High Channel

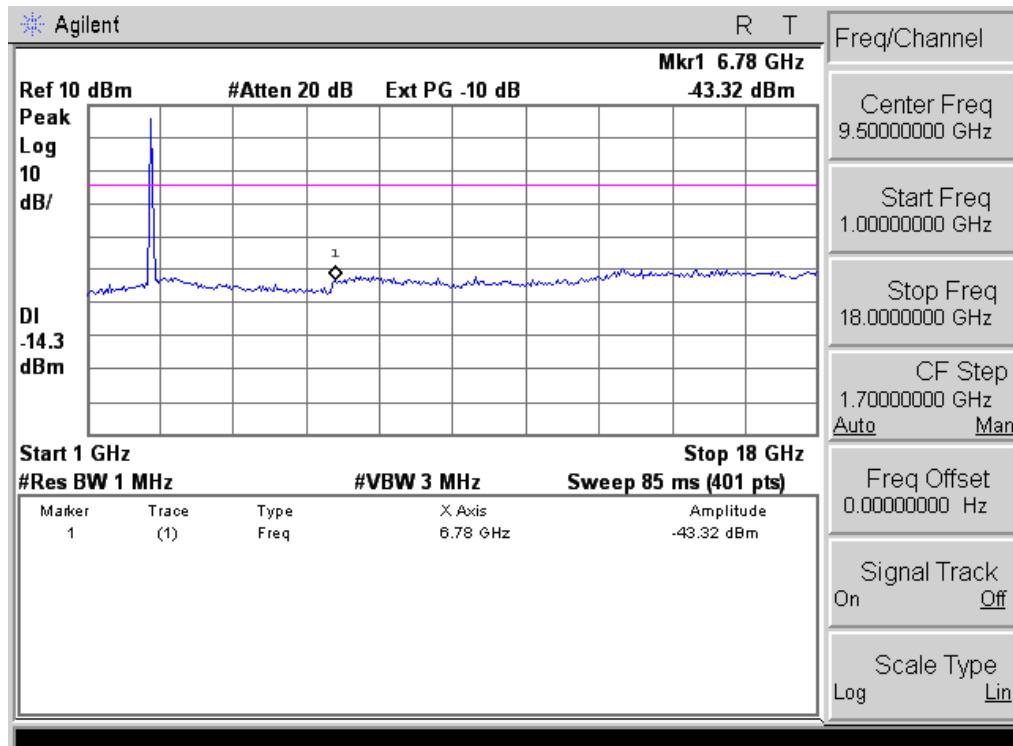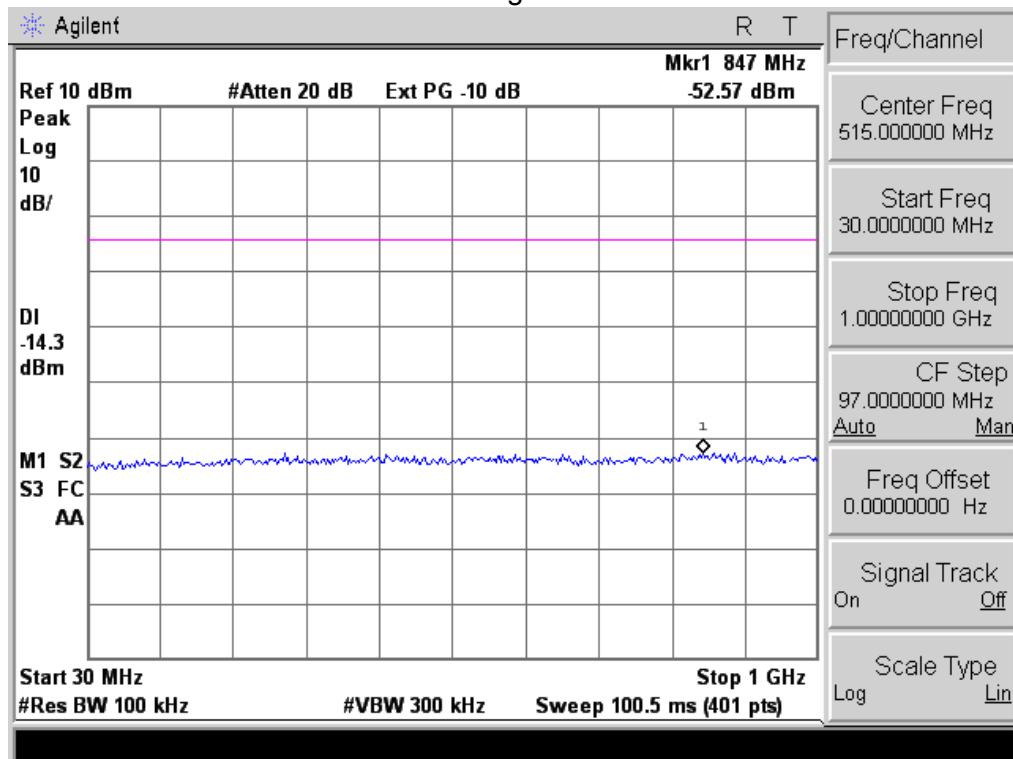

Radiated band edge:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type	Comment
802.11b							
2390	61.97	-12.99	48.98	74	-25.02	peak	Vertical
2390	58.88	-12.99	45.89	74	-28.11	peak	Horizontal
2483.5	50.78	-12.78	38.00	74	-36.00	peak	Vertical
2483.5	50.63	-12.78	37.85	74	-35.69	peak	Horizontal
802.11g							
2390	56.44	-12.99	43.45	74	-30.55	peak	Vertical
2390	59.38	-12.99	46.39	74	-27.61	peak	Horizontal
2483.5	52.42	-12.78	39.64	74	-34.46	peak	Vertical
2483.5	51.11	-12.78	38.43	74	-35.57	peak	Horizontal
802.11n							
2390	57.26	-12.99	44.27	74	-29.73	peak	Vertical
2390	56.15	-12.99	43.16	74	-30.84	peak	Horizontal
2483.5	51.52	-12.78	38.74	74	-34.86	peak	Vertical
2483.5	52.51	-12.78	39.73	74	-34.27	peak	Horizontal

NOTE: The result(PK) less than AV limite, No need shown AV result.

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW \geq 3 kHz.
4. Set the VBW \geq 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP




4.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

EUT :	TABLET PC	Model Name :	STB8098
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX b Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-11.38	8	PASS
2437 MHz	-13.03	8	PASS
2462 MHz	-12.59	8	PASS


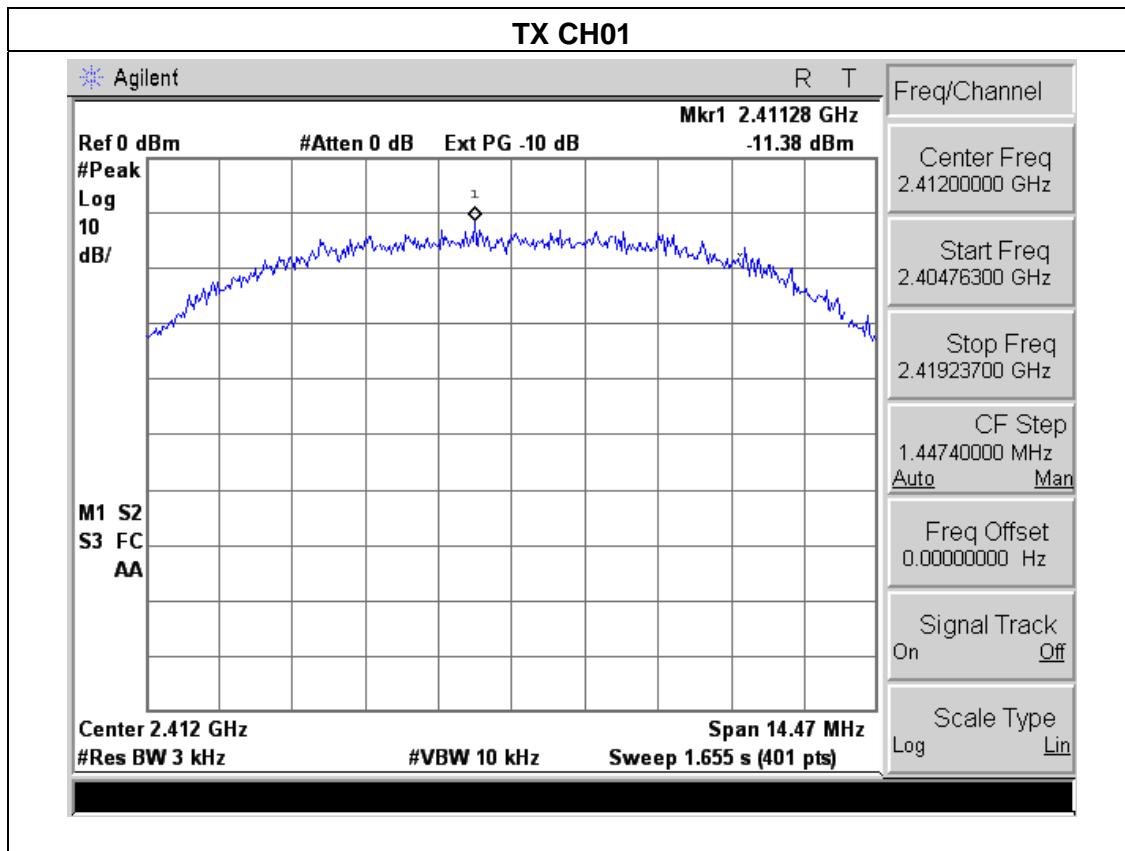


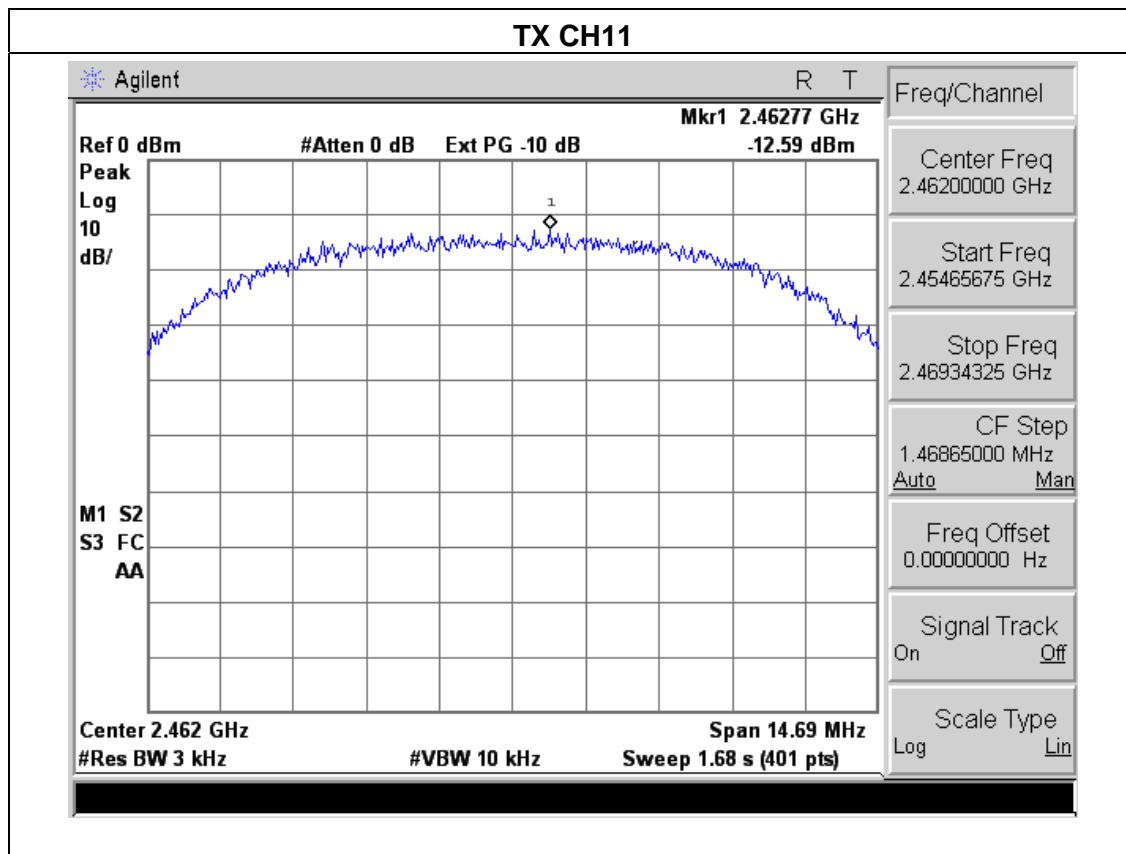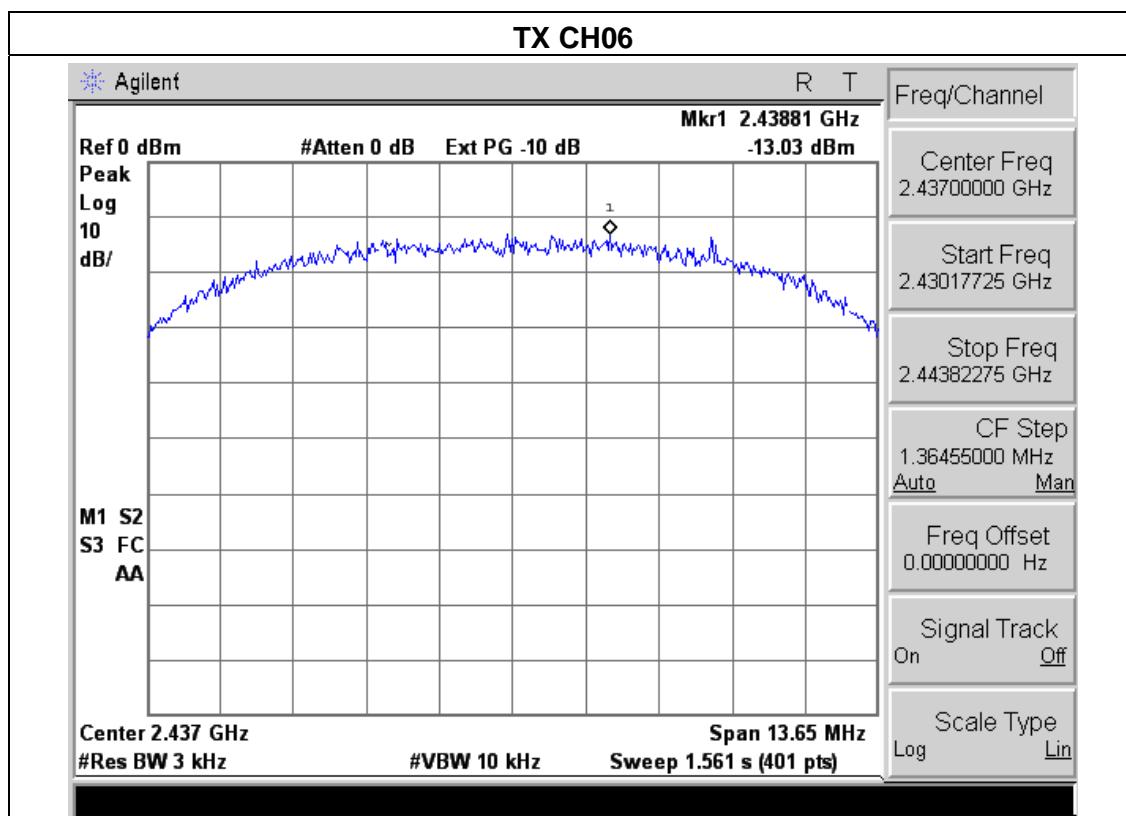

EUT :	TABLET PC	Model Name :	STB8098
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX g Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-16.04	8	PASS
2437 MHz	-16.51	8	PASS
2462 MHz	-15.32	8	PASS


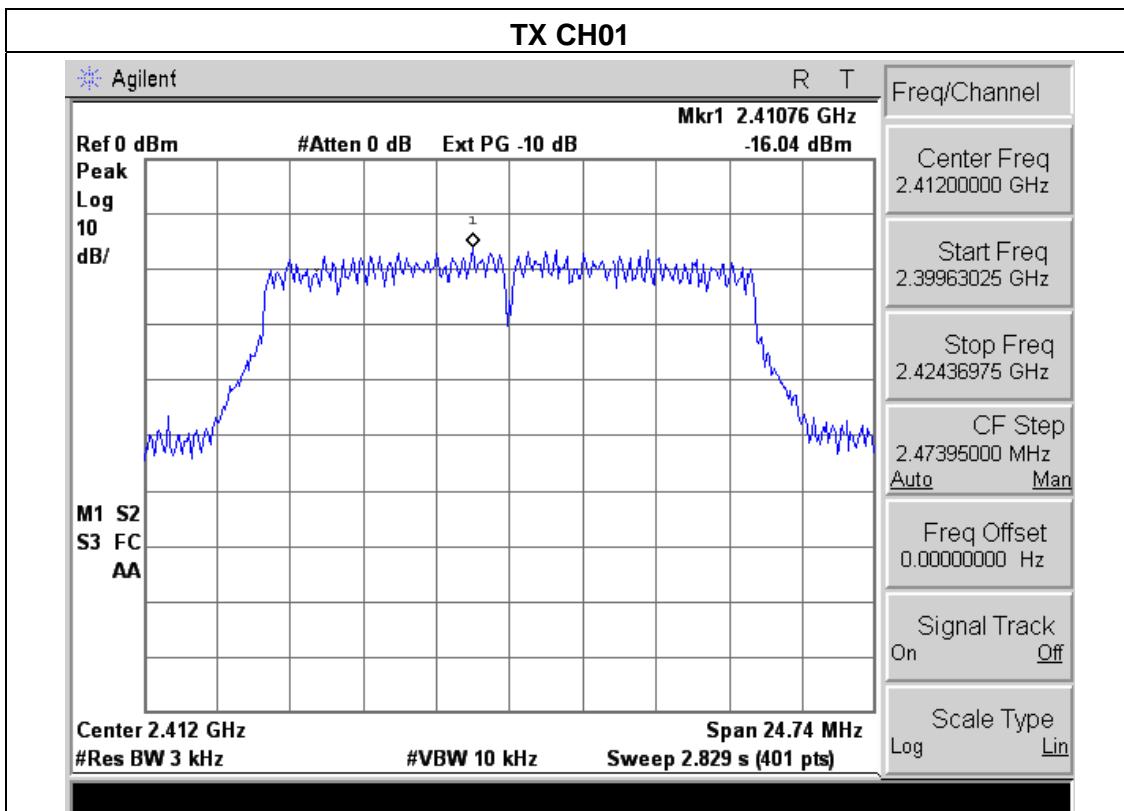


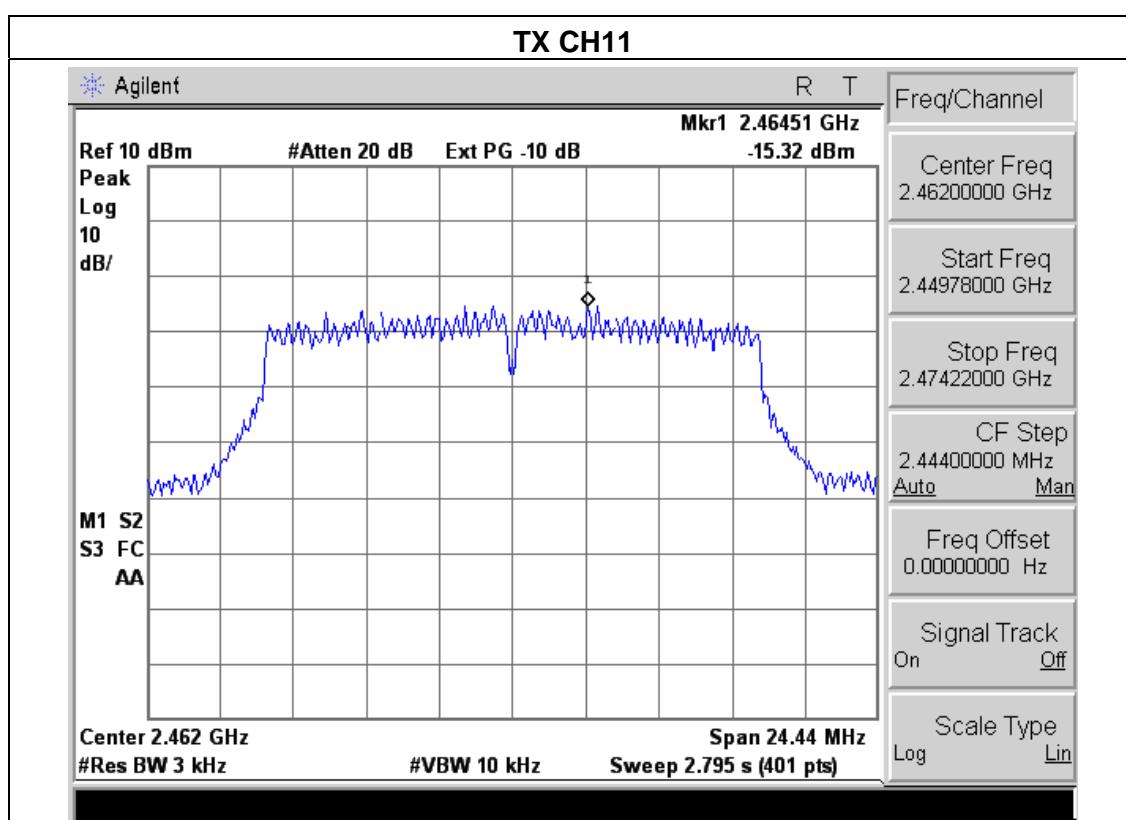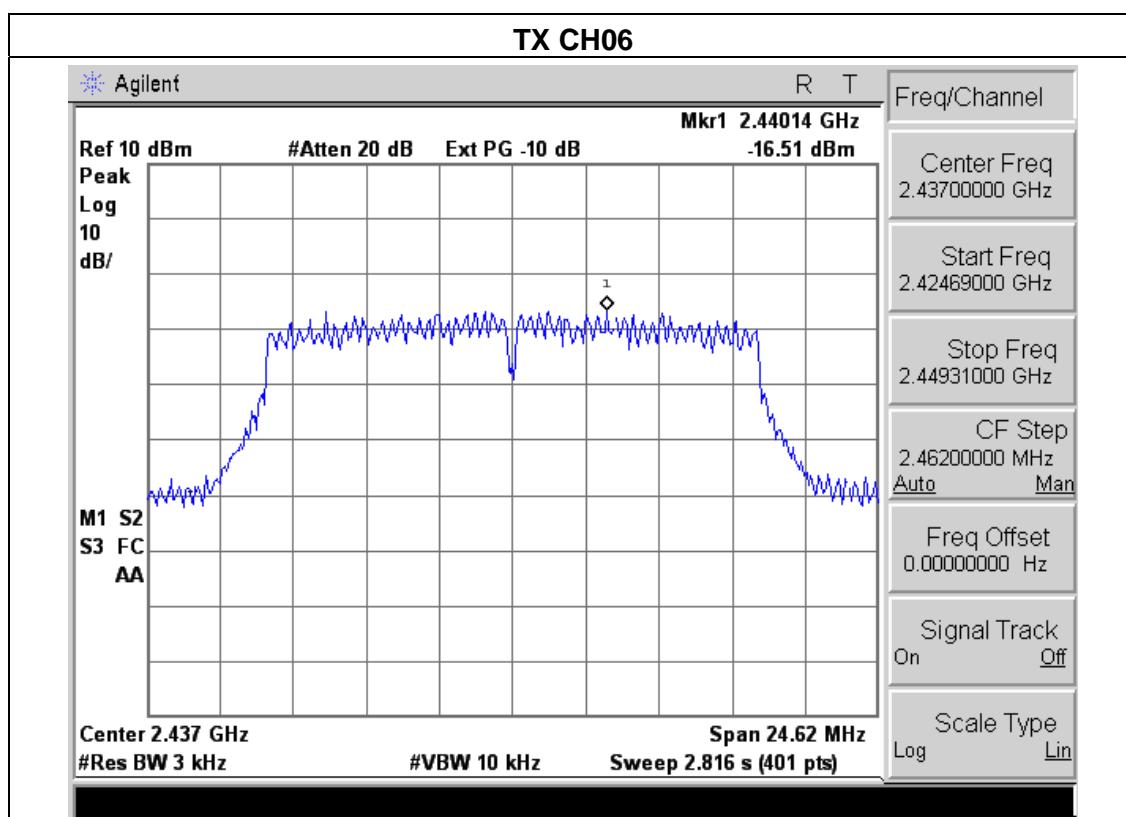

EUT :	TABLET PC	Model Name :	STB8098
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX n Mode /CH01, CH06, CH11		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-15.67	8	PASS
2437 MHz	-15.54	8	PASS
2462 MHz	-14.70	8	PASS

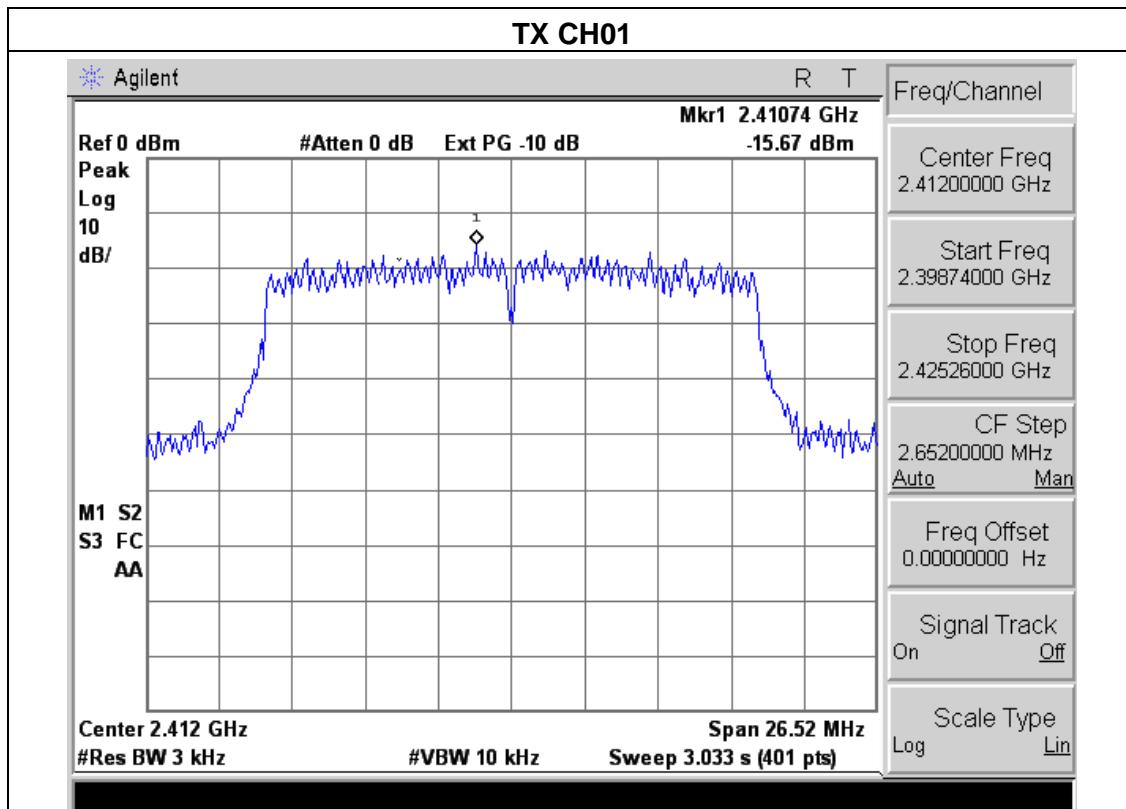

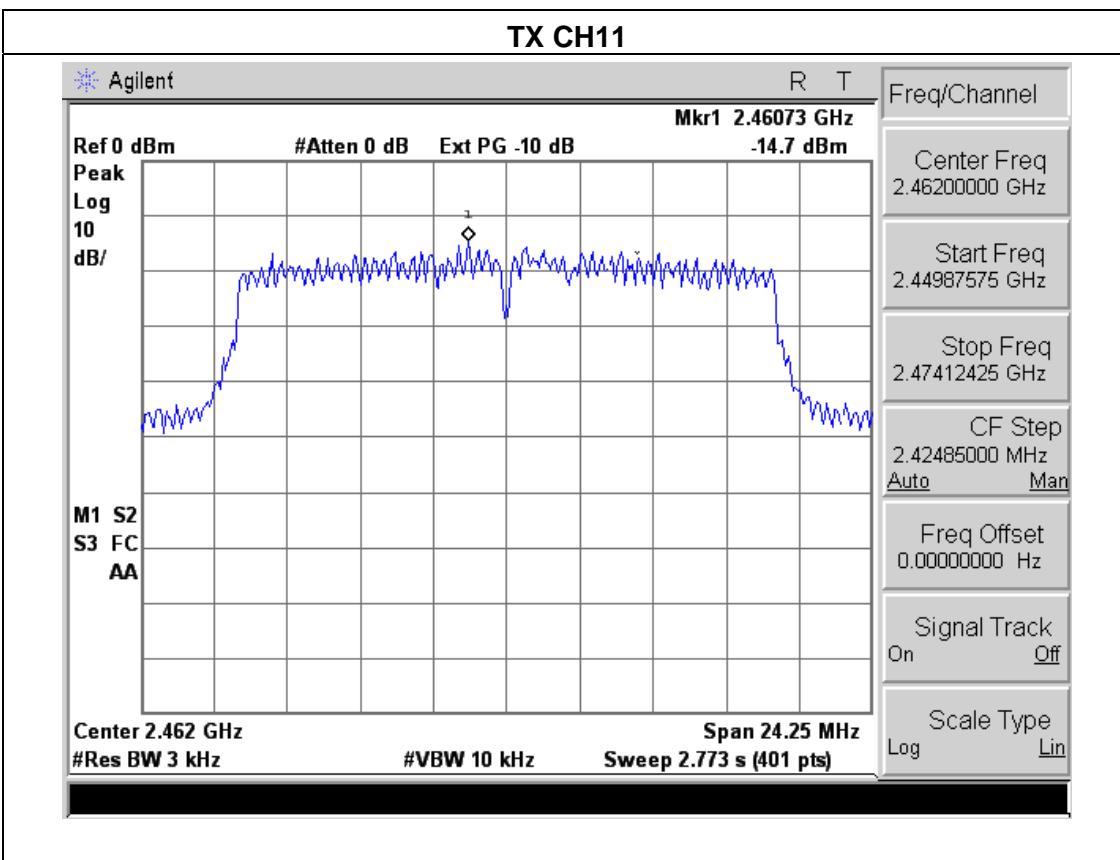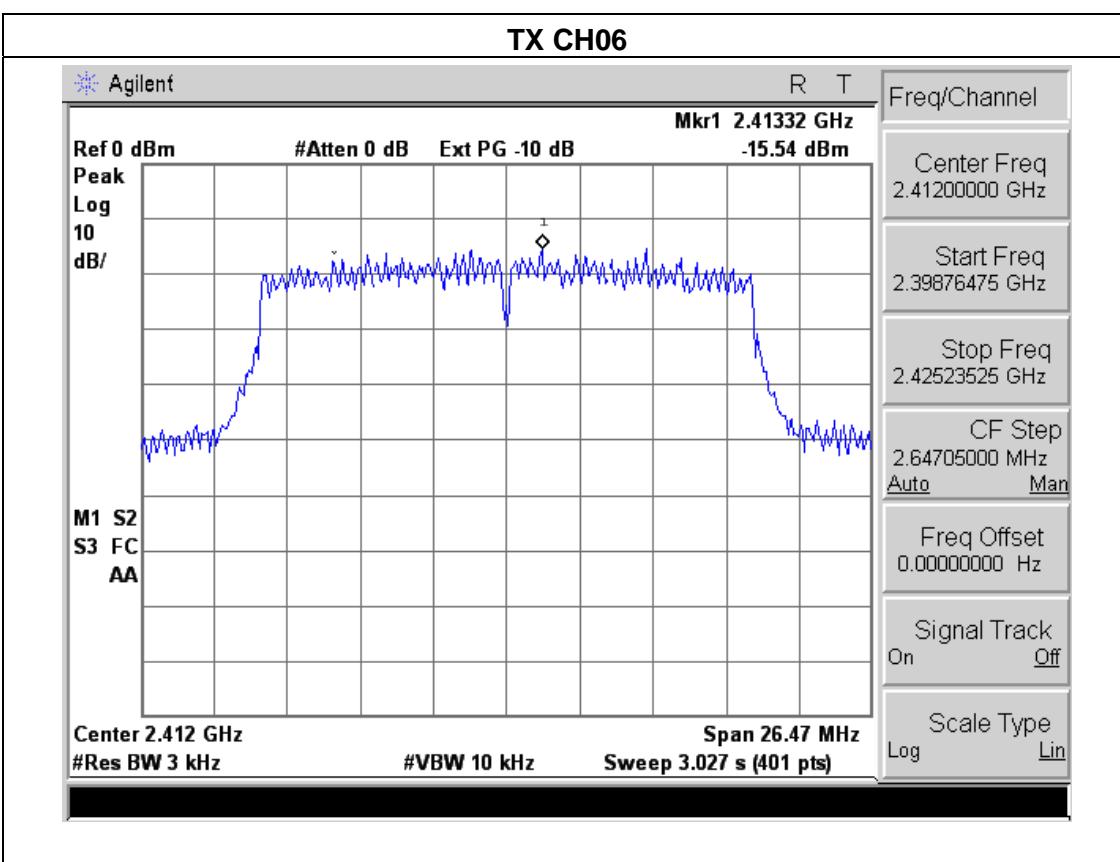

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

1. Set RBW= 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP




5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


5.1.5 TEST RESULTS

EUT :	TABLET PC	Model Name :	STB8098
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX b Mode /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	9.52	500	Pass
Middle	2437	9.10	500	Pass
High	2462	9.79	500	Pass

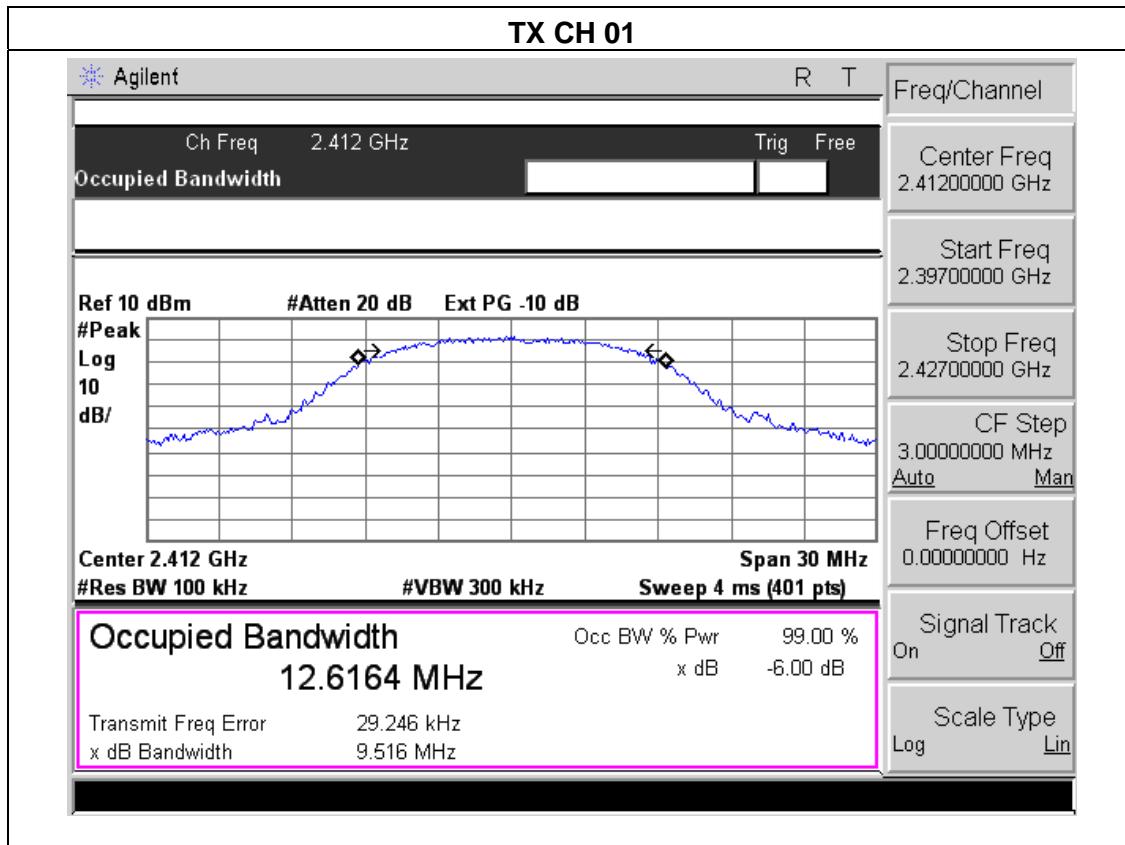

TX CH 06

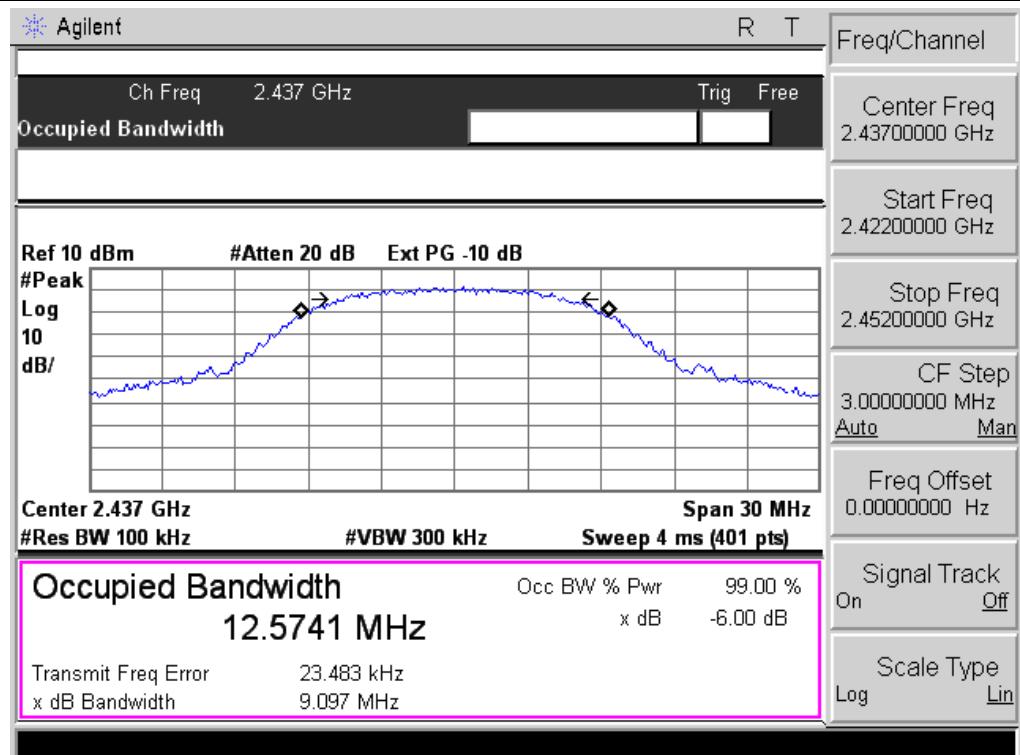


TX CH 11

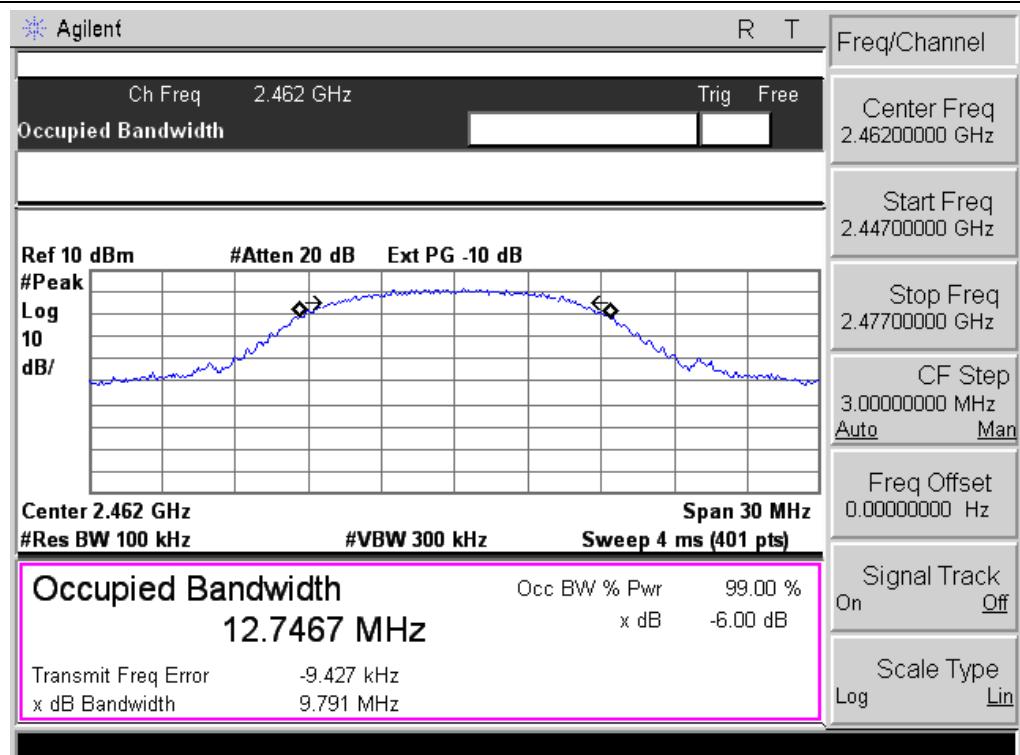


EUT :	TABLET PC	Model Name :	STB8098
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX g Mode /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.49	500	Pass
Middle	2437	16.41	500	Pass
High	2462	16.29	500	Pass

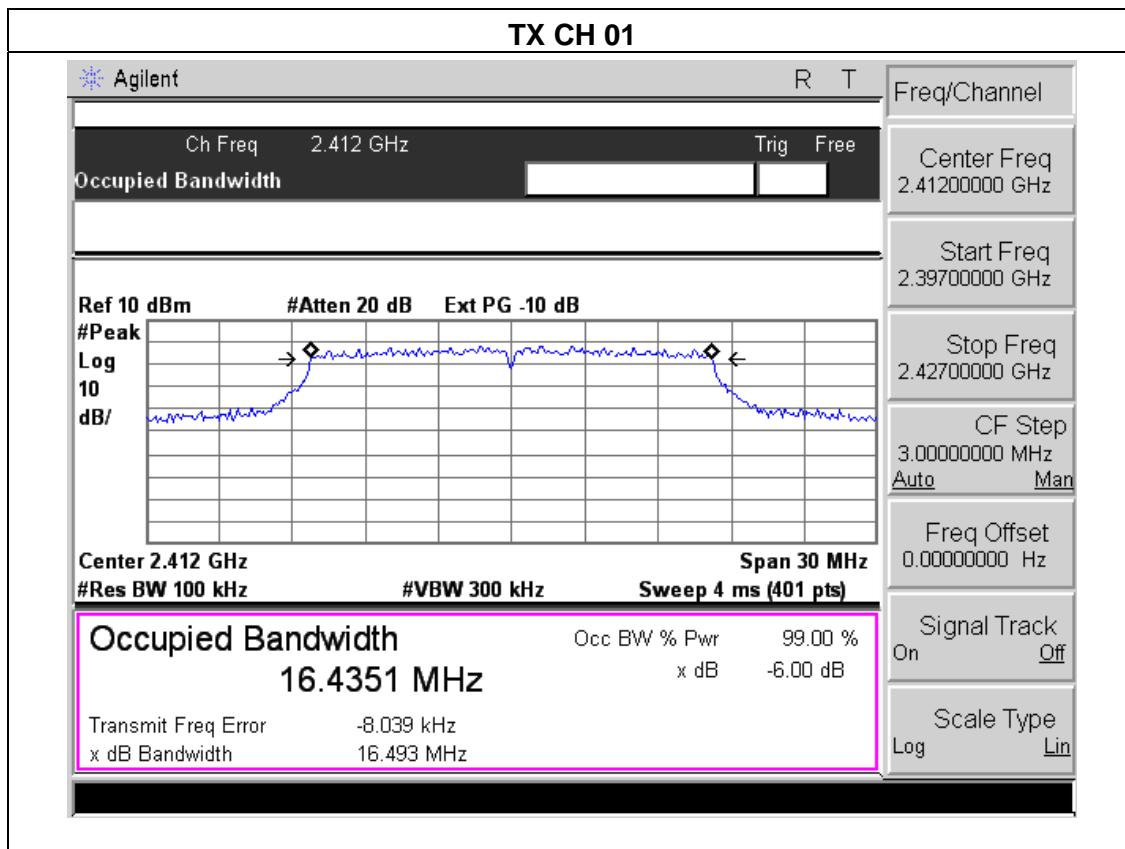

TX CH 06

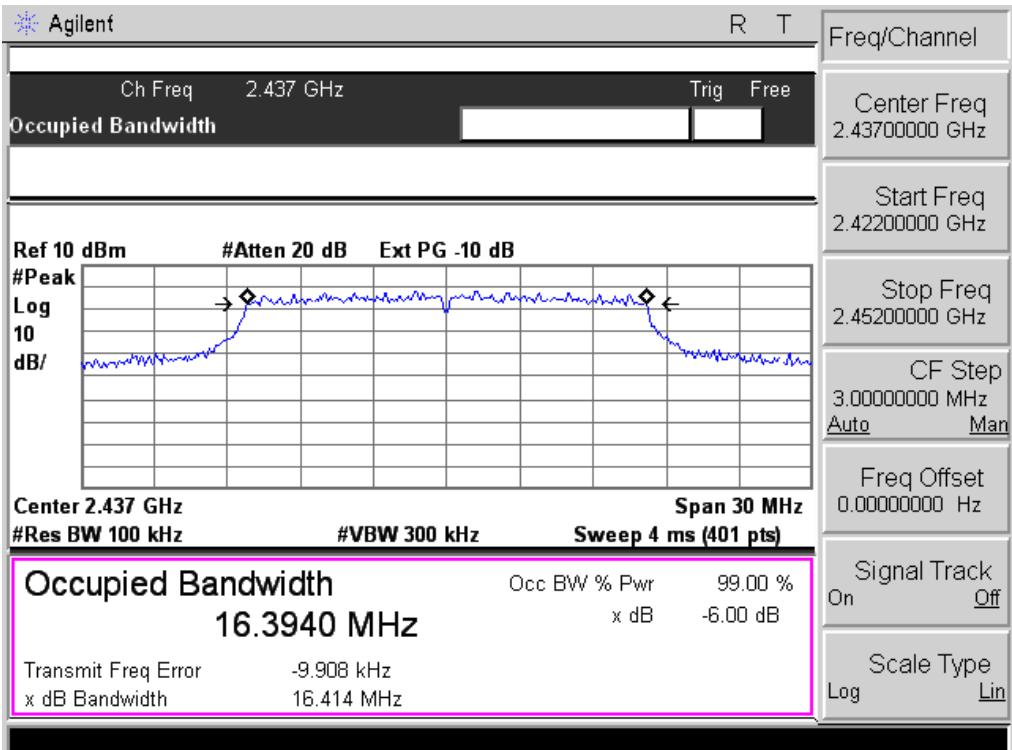



TX CH 11

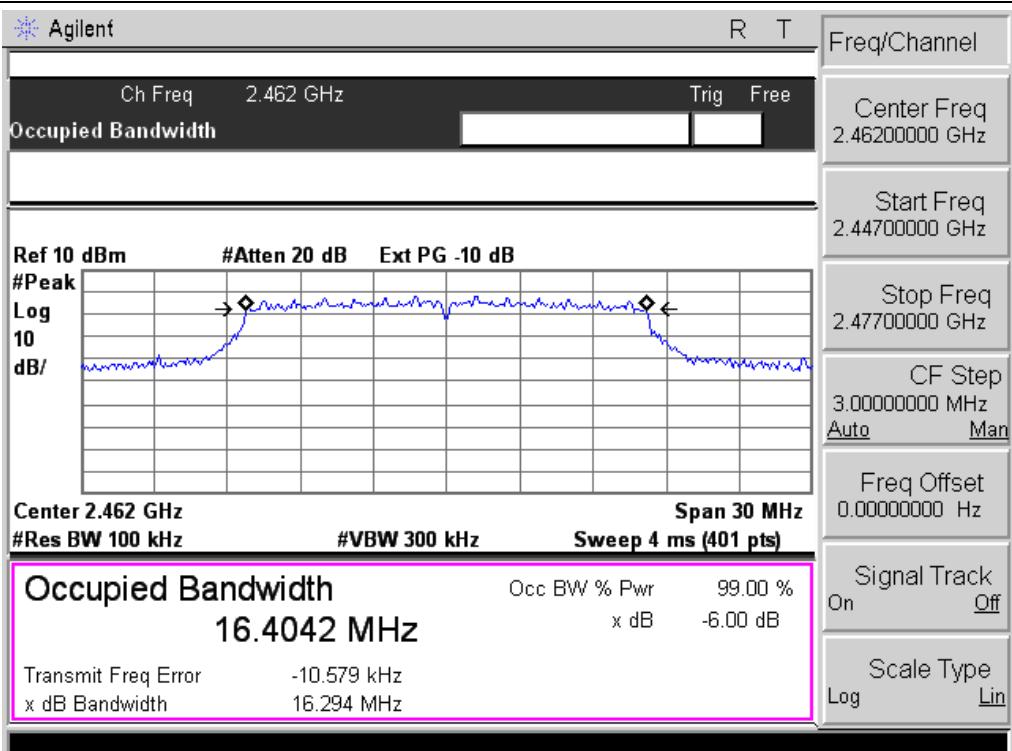

EUT :	TABLET PC	Model Name :	STB8098
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX n Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.68	500	Pass
Middle	2437	17.65	500	Pass
High	2462	17.50	500	Pass

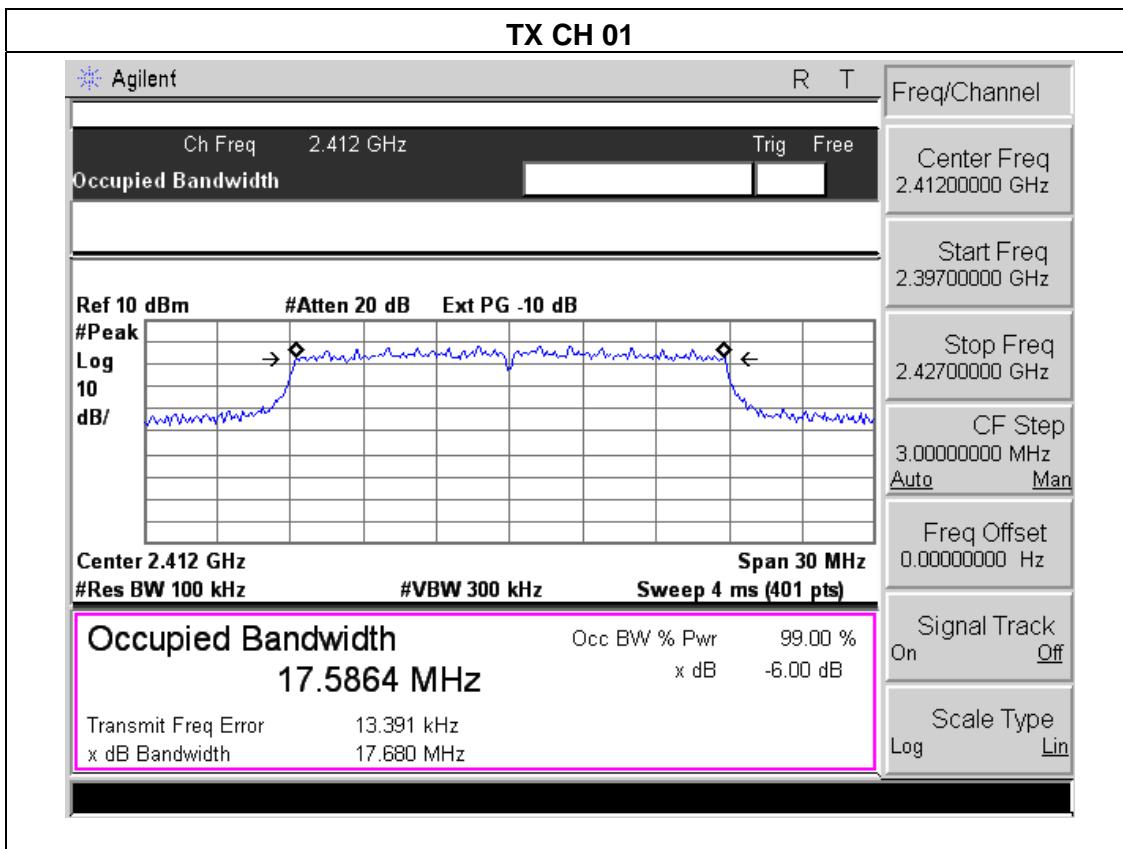

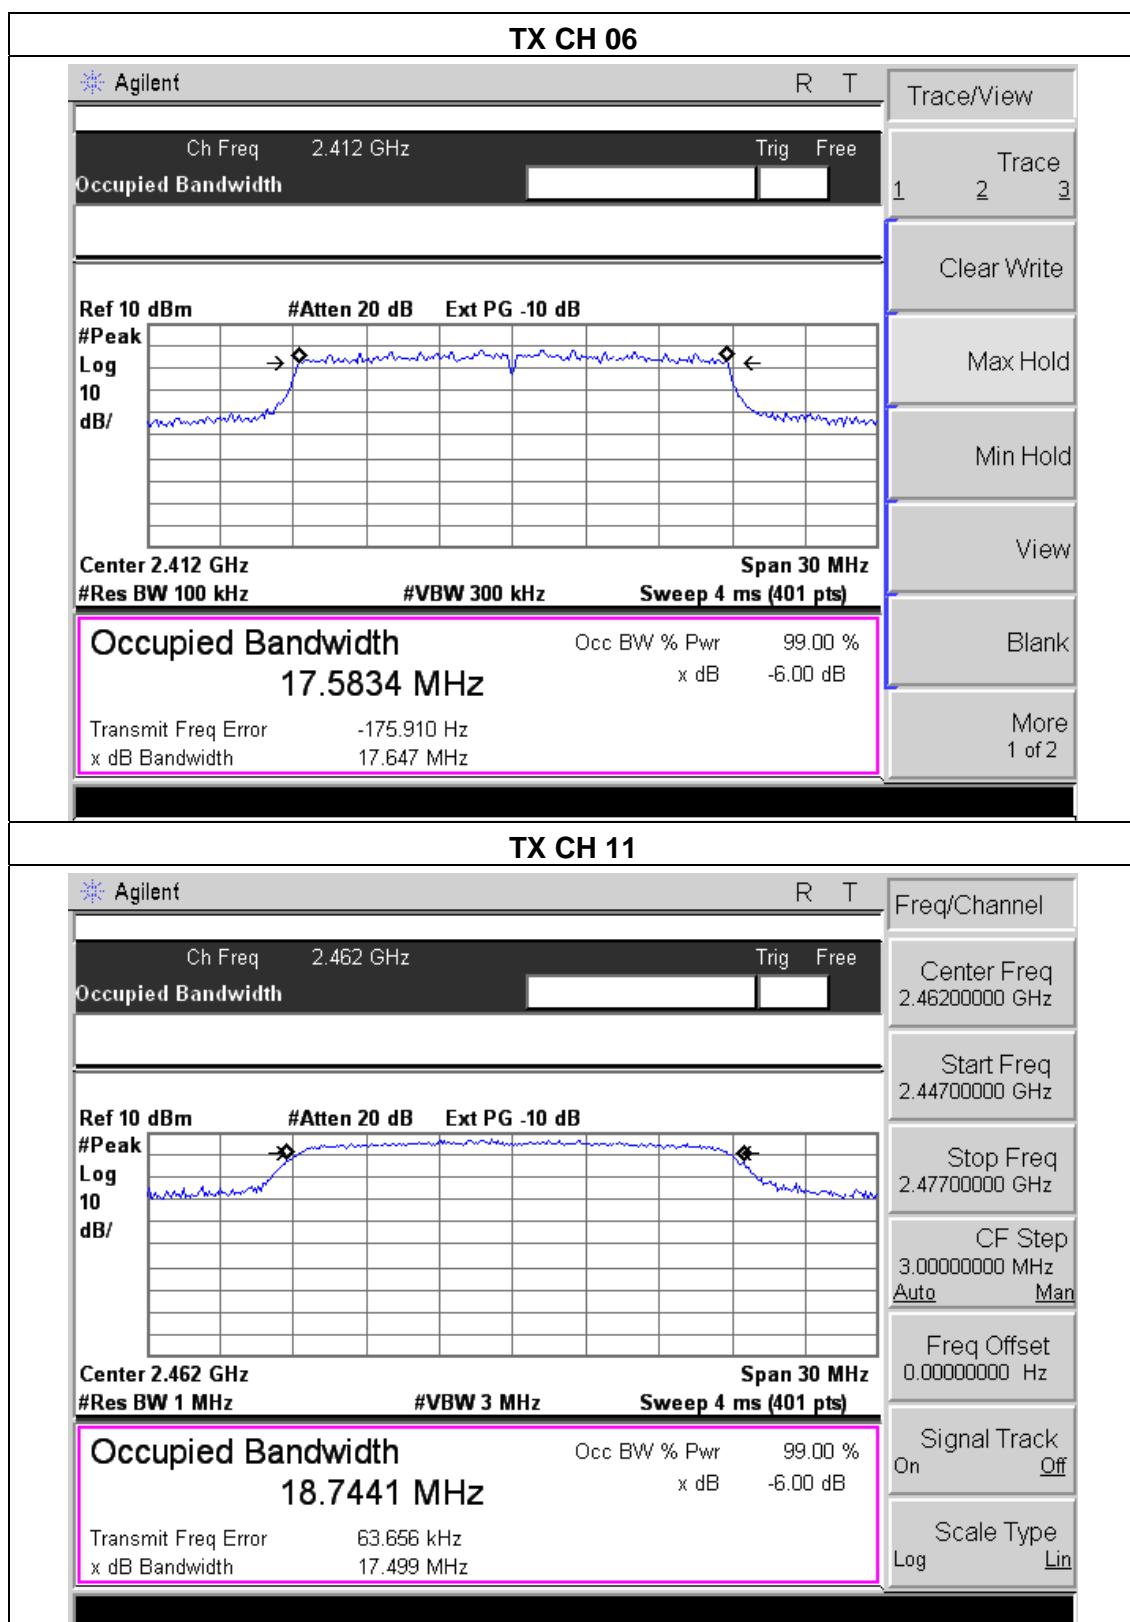

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

EUT :	TABLET PC	Model Name :	STB8098
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz
Test Mode :	TX b/g/n Mode /CH01, CH06, CH11		

TX 802.11b Mode				
Test Channel	Frequency (MHz)	Maximum Peak Conducted Output Power	Maximum AV Conducted Output Power	LIMIT dBm
CH01	2412	10.99	8.03	30
CH06	2437	10.57	8.11	30
CH11	2462	10.09	8.12	30
TX 802.11g Mode				
CH01	2412	9.01	7.24	30
CH06	2437	9.71	7.32	30
CH11	2462	9.95	7.89	30
TX 802.11n Mode				
CH01	2412	8.87	7.56	30
CH06	2437	9.53	7.98	30
CH11	2462	9.08	7.56	30

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP



7.3 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.4 TEST RESULTS


EUT :	TABLET PC	Model Name :	STB8098
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from adapter AC120V/60Hz

Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result
802.11b mode			
Left-band	53.59	20	Pass
Right-band	48.30	20	Pass
802.11g mode			
Left-band	40.91	20	Pass
Right-band	34.02	20	Pass
802.11n-HT20 mode			
Left-band	37.38	20	Pass
Right-band	34.19	20	Pass


802.11b: Band Edge, Left Side

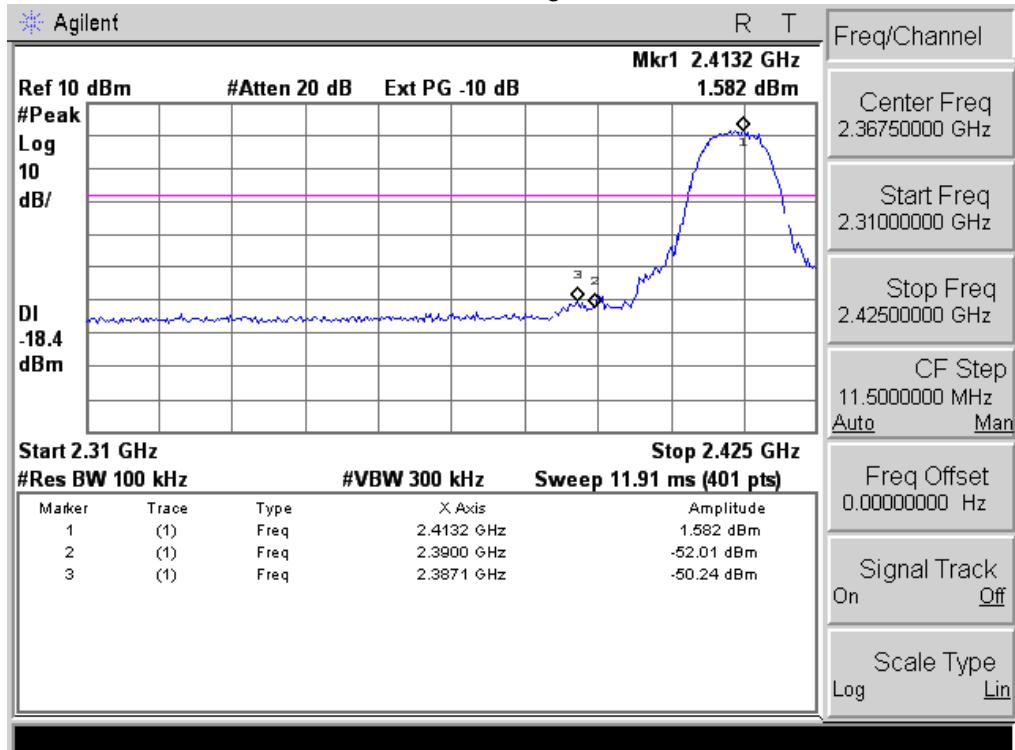


802.11b: Band Edge, Right Side

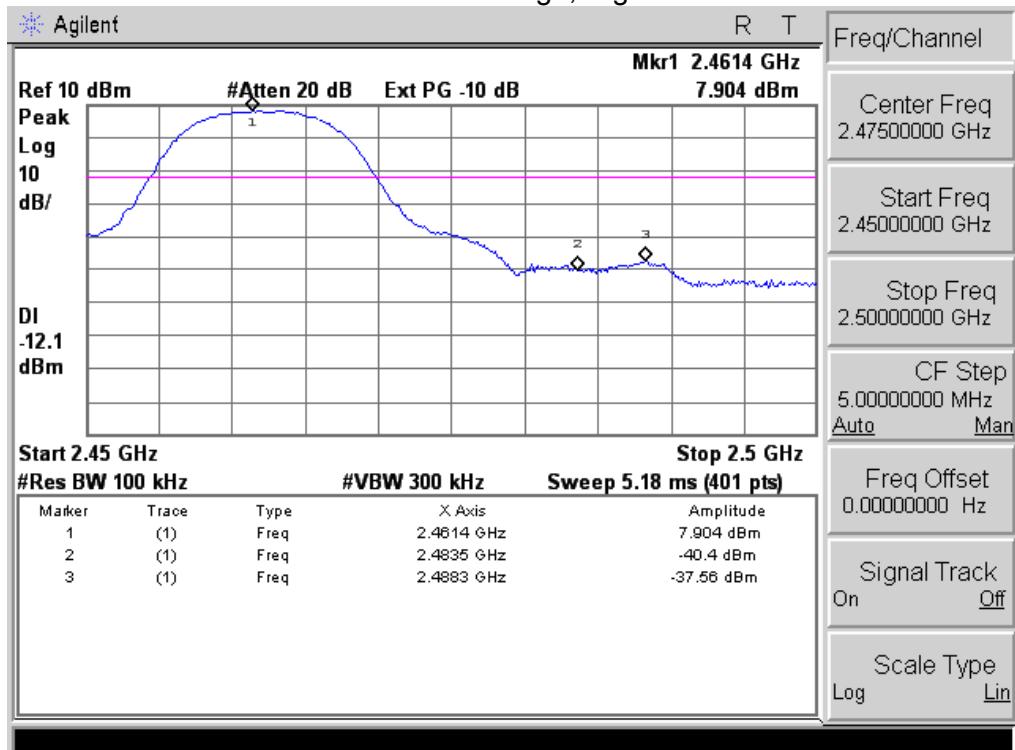


802.11g: Band Edge, Left Side

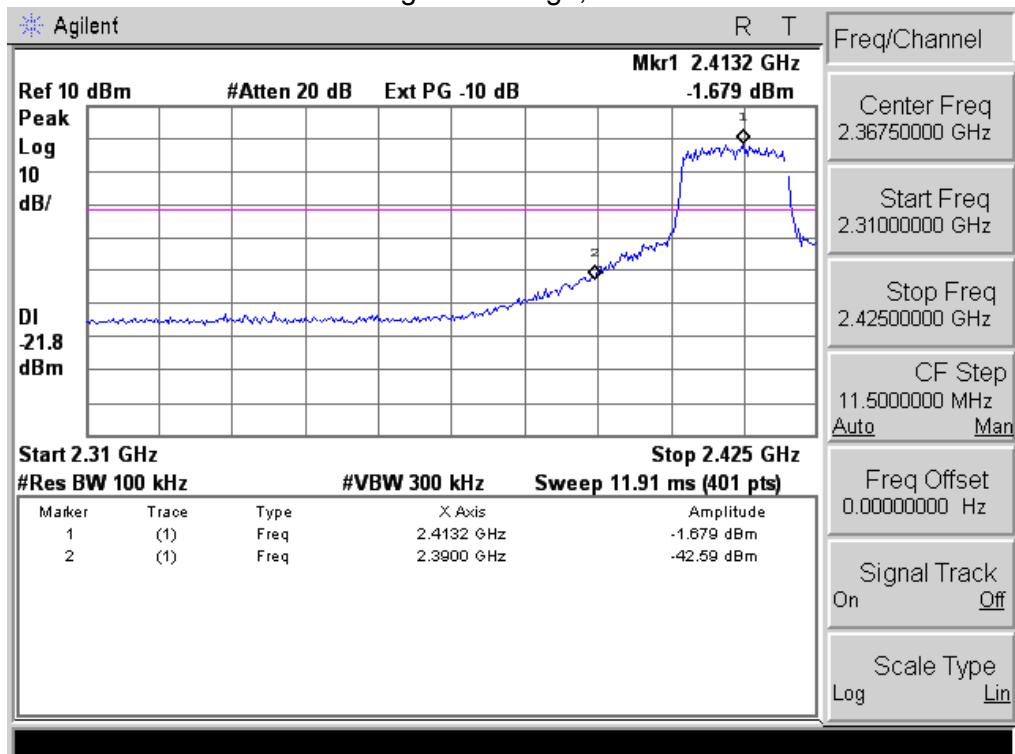


802.11g: Band Edge, Right Side

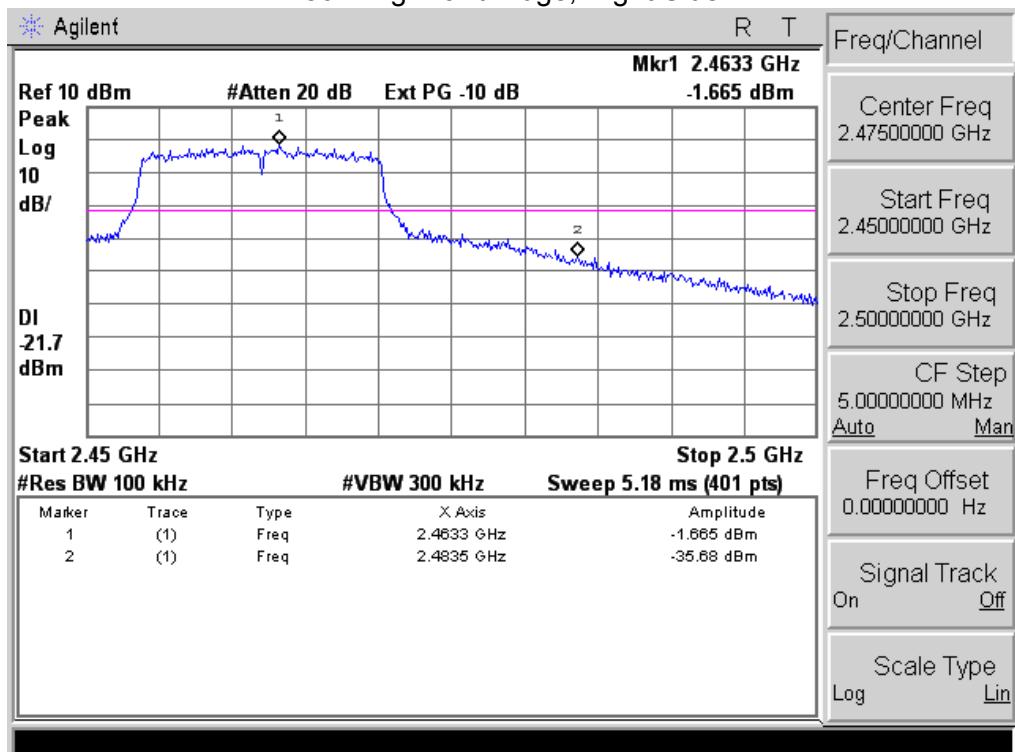

802.11n: Band Edge, Left Side

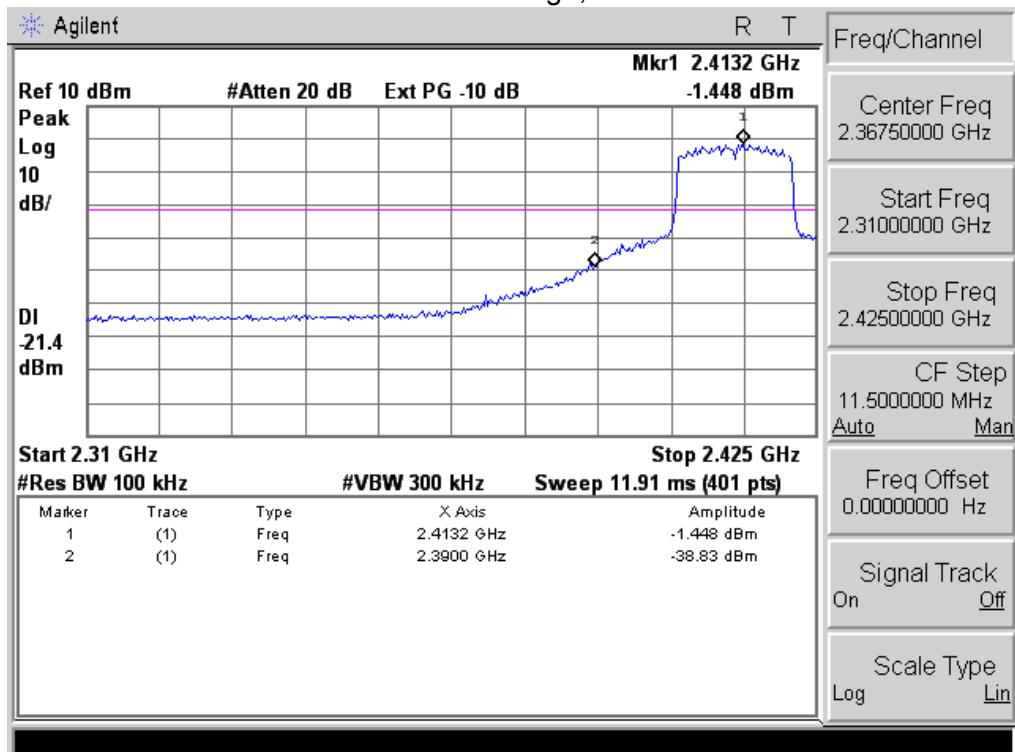

802.11n: Band Edge, Right Side

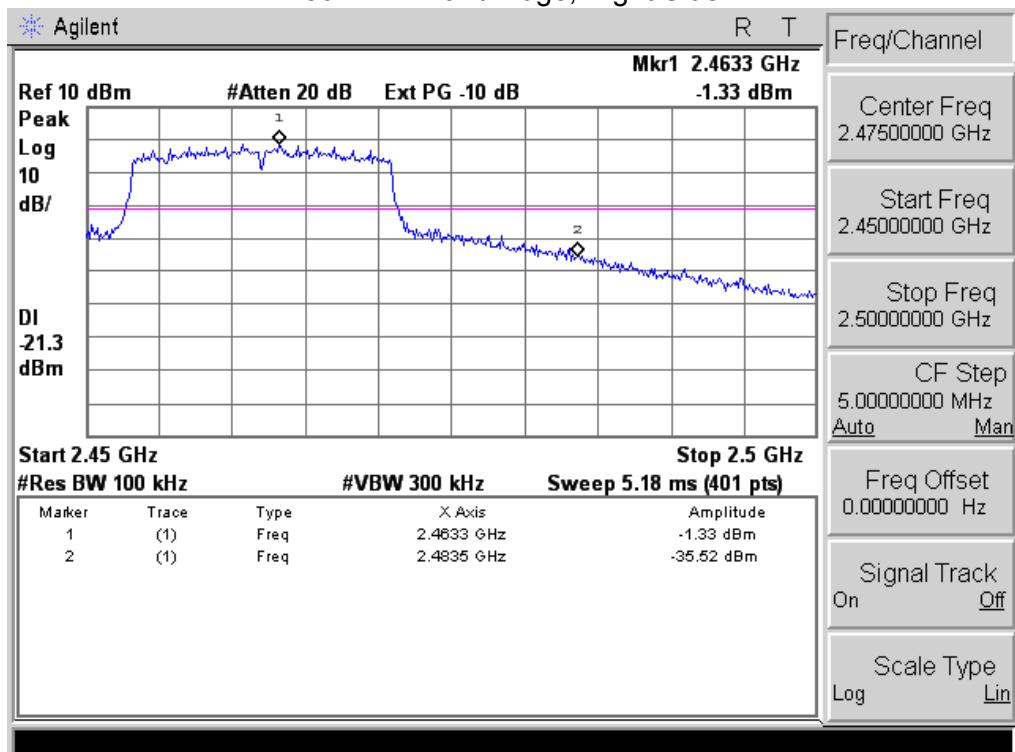

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is Integrated(FPCB) antenna. It comply with the standard requirement.

9. EUT TEST PHOTO

Radiated Measurement Photos

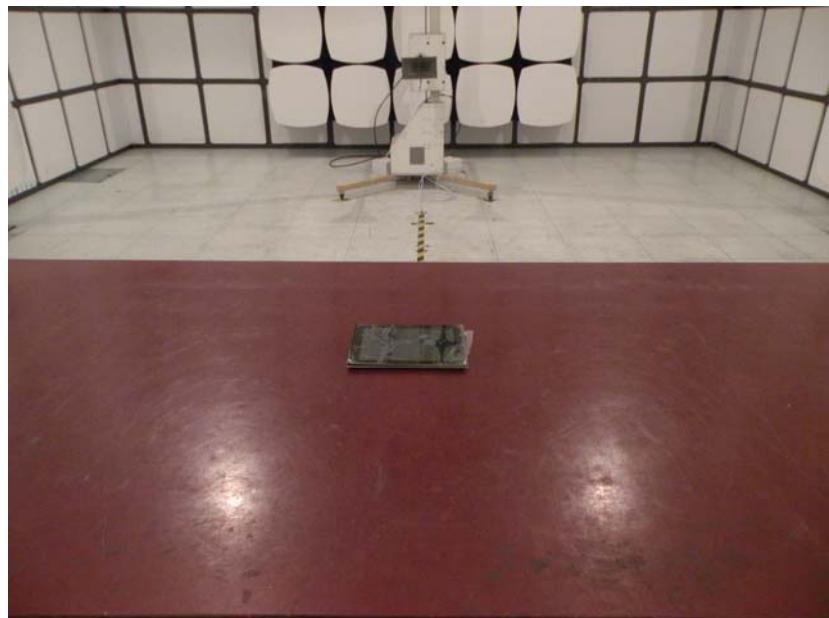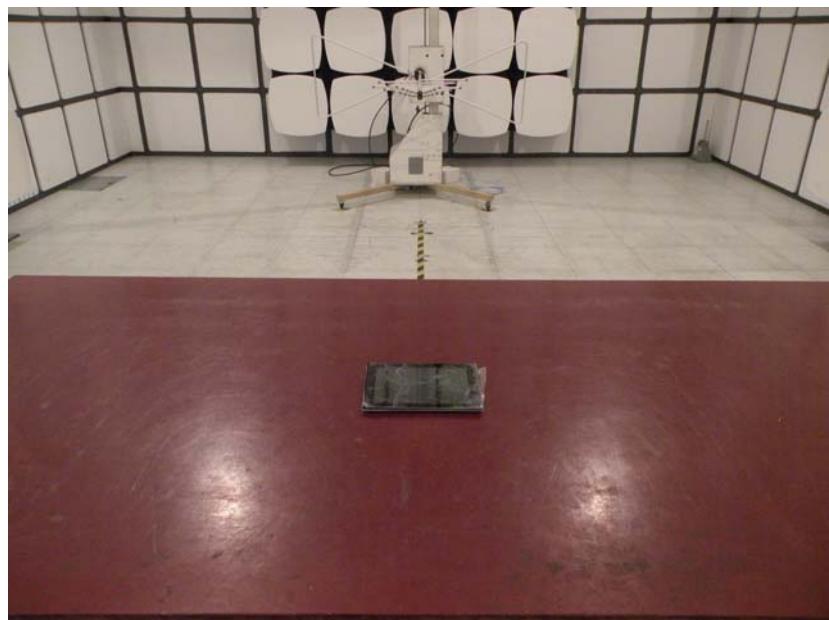

Conducted Measurement Photos

