

FCC PART 22H, PART 24E
FCC PART 27
MEASUREMENT AND TEST REPORT

For

PC Smart S.A.

Carrera 116 no.15-25

FCC ID: 2ABFV-P45K15

Report Type: Original Report	Product Type: Touch Smart Phone Krone 4.5
Test Engineer: Dean Liu 	
Report Number: RSZ150925010-00C	
Report Date: 2015-10-30	
Reviewed By: Sula Huang RF Leader 	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) & § 27.50 - RF OUTPUT POWER.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA	16
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH.....	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST EQUIPMENT LIST AND DETAILS.....	43
TEST DATA	43
FCC §2.1051, §22.917(A) & §24.238(A) & §27.53- SPURIOUS EMISSIONS AT ANTENNA TERMINALS...61	
APPLICABLE STANDARD	61
TEST PROCEDURE	61
TEST EQUIPMENT LIST AND DETAILS.....	61
TEST DATA	61
FCC §2.1053, §22.917 & §24.238 & §27.53- SPURIOUS RADIATED EMISSIONS	92
APPLICABLE STANDARD	92
TEST PROCEDURE	92
TEST EQUIPMENT LIST AND DETAILS.....	92
TEST DATA	93
FCC §22.917(A) & §24.238(A) & §27.53(G)§27.53(H) §27.53(M) - BAND EDGES.....	97
APPLICABLE STANDARD	97
TEST PROCEDURE	97
TEST EQUIPMENT LIST AND DETAILS.....	98
TEST DATA	98

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY.....149

 APPLICABLE STANDARD149

 TEST PROCEDURE149

 TEST EQUIPMENT LIST AND DETAILS.....150

 TEST DATA150

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *PC Smart S.A.*'s product, model number: *XF4502 (FCC ID: 2ABFV-P45K15)* (the "EUT") in this report was a *Touch Smart Phone Krone 4.5*, which was measured approximately: 13.21 cm (L) x 6.62 cm (W) x 0.96 cm (H), rated input voltage: DC3.8V rechargeable Li-ion battery or DC5.0V charging from adapter.

Adapter information:

Model: TUJP050100-A00

Input: AC100-240V, 50/60 Hz, 0.2A

Output: DC 5V, 1A

All measurement and test data in this report was gathered from production sample serial number: 150925010 (Assigned byBACL, Dongguan). The EUT was received on 2015-09-30.

Objective

This report is prepared on behalf of *PC Smart S.A.* in accordance with: Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E of the Federal Communications Commission's rules.
Part 2, Part 27 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: 2ABFV-P45K15

FCC Part 15C DSS submissions with FCC ID: 2ABFV-P45K15

FCC Part 15C DTS submissions with FCC ID: 2ABFV-P45K15

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA-603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D-2010.

The test items were performed with the EUT operating at testing mode.


Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	109038
R&S	Wideband Radio Communication Tester	CMW500	106891

Configuration of Test Setup

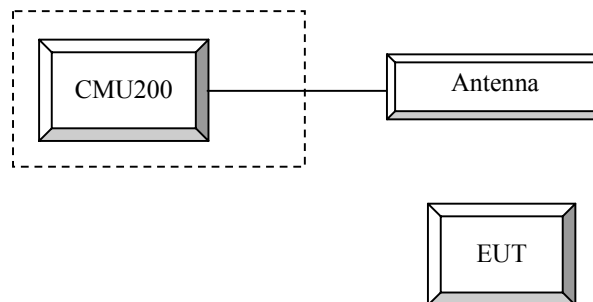

Block Diagram of Test Setup

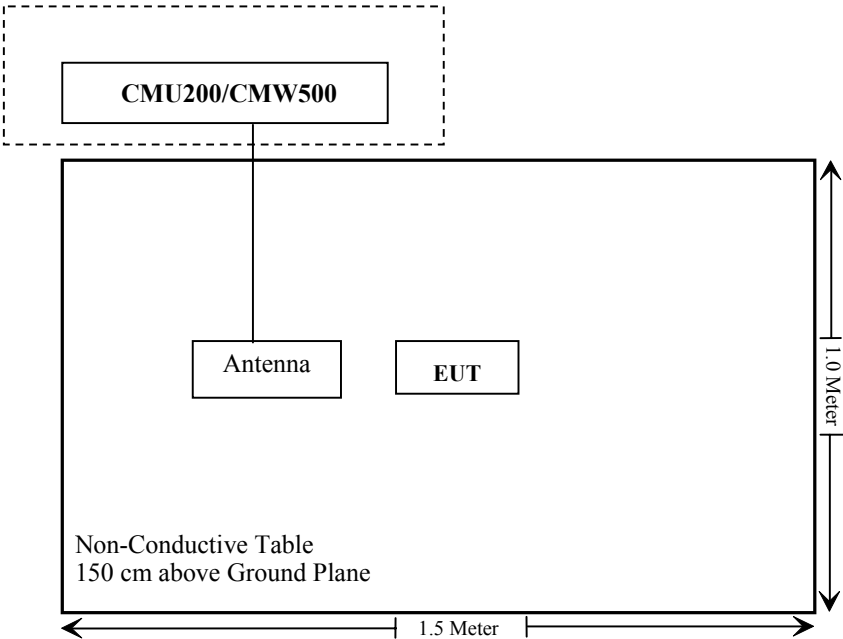

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310, §2.1093	RF Exposure	Compliance
§2.1046; § 22.913 (a); § 24.232 (c); §27.50	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
§ 2.1051, § 22.917 (a); § 24.238 (a); §27.53	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053 § 22.917 (a); § 24.238 (a); §27.53	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a); §27.53	Out of band emission, Band Edge	Compliance
§ 2.1055 § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

FCC §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ150925010-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50 - RF OUTPUT POWER**Applicable Standard**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to FCC §2.1046 and §27.50 (c), (10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

According to FCC §2.1046 and §27.50 (d), (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

According to FCC §2.1046 and §27.50 (h), (2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure**GSM/GPRS/EGPRS**

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB
 Slot Config > Unchanged (if already set under MS signal)
 TCH > choose desired test channel
 Hopping > Off
 Main Timeslot > 3
 Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream
 AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
 Connection Press Signal on to turn on the signal and change settings

WCDMA-Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA A General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

LTE:

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Radiated method:

ANSI/TIA-603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
ETS LINDGREN	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
Giga	Signal Generator	1026	320408	2015-05-09	2016-05-09
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2015-09-06	2018-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.4~27.2 °C
Relative Humidity:	48~52%
ATM Pressure:	100.6~101kPa

The testing was performed by Dean Liu from 2015-10-15 to 2015-10-27.

Conducted Power**Cellular Band (Part 22H) & PCS Band (Part 24E)**

Band	Channel No.	Peak Output Power (dBm)								
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Cellular	128	32.40	32.56	31.99	30.25	29.07	26.77	24.69	22.77	21.88
	190	32.70	32.41	31.88	30.17	29.13	26.76	24.97	22.81	21.64
	251	32.60	32.30	31.79	30.16	29.06	26.65	25.05	22.66	21.74
PCS	512	28.76	28.23	27.28	25.67	24.38	25.33	23.64	21.68	20.75
	661	29.05	28.13	27.36	25.63	24.59	25.37	23.98	22.14	20.55
	810	28.88	28.13	27.62	25.73	24.65	25.19	23.73	21.97	20.93

WCDMA Band II (PART 24E)

Mode	3GPP Sub Test	Average Output Power (dBm)					
		Low Channel (Ave. Power)	Low Channel (PAR)	Middle Channel (Ave. Power)	Middle Channel (PAR)	High Channel (Ave. Power)	High Channel (PAR)
Rel 99	1	22.30	2.64	22.68	2.64	22.82	2.64
HSDPA	1	21.59	2.92	21.84	2.89	21.96	2.74
	2	21.49	3.06	22.01	2.87	21.93	2.75
	3	21.60	2.97	21.97	2.72	22.07	2.52
	4	21.57	3.15	22.05	2.78	22.13	2.67
HSUPA	1	21.53	2.87	21.9	2.76	22.03	2.64
	2	21.61	2.92	21.83	2.62	22.15	2.63
	3	21.59	2.93	21.79	2.74	21.98	2.68
	4	21.57	2.86	21.93	2.63	22.08	2.75
	5	21.53	3.03	21.92	2.88	22.13	2.47
DC-HSDPA	1	21.1	3.17	21.49	2.74	21.51	2.72
	2	21.00	3.21	21.32	2.60	21.54	2.69
	3	21.01	2.89	21.54	2.77	21.50	2.74
	4	21.04	3.00	21.39	2.89	21.48	2.71
HSPA+	1	20.96	3.02	21.39	2.58	21.61	2.52


WCDMA Band V (PART 22H)

Mode	3GPP Sub Test	Average Output Power (dBm)					
		Low Channel (Ave. Power)	Low Channel (PAR)	Middle Channel (Ave. Power)	Middle Channel (PAR)	High Channel (Ave. Power)	High Channel (PAR)
Rel 99	1	22.54	2.80	22.28	2.92	22.46	2.92
HSDPA	1	21.72	3.17	21.38	3.32	21.53	3.16
	2	21.83	3.03	21.54	2.96	21.64	2.98
	3	21.56	2.98	21.22	3.27	21.72	2.84
	4	21.83	3.04	21.07	3.32	21.64	2.98
HSUPA	1	21.6	2.91	21.31	3.36	21.45	3.05
	2	21.72	2.88	21.11	3.06	21.60	2.78
	3	21.54	2.96	21.18	3.26	21.72	3.08
	4	21.64	2.94	21.16	3.26	21.49	2.96
	5	21.64	3.00	21.47	3.12	21.65	2.98
DC-HSDPA	1	21.13	2.88	20.87	3.12	21.03	3.07
	2	21.07	2.96	20.89	3.23	21.04	2.84
	3	21.06	2.85	20.95	2.97	21.19	3.04
	4	21.07	2.81	20.91	3.34	21.06	2.94
HSPA+	1	21.04	2.89	20.92	3.10	21.22	2.87

Note: peak-to-average ratio (PAR) <13 dB.


Peak-to-average ratio (PAR)
WCDMA Band II (PART 24E)

Low Channel

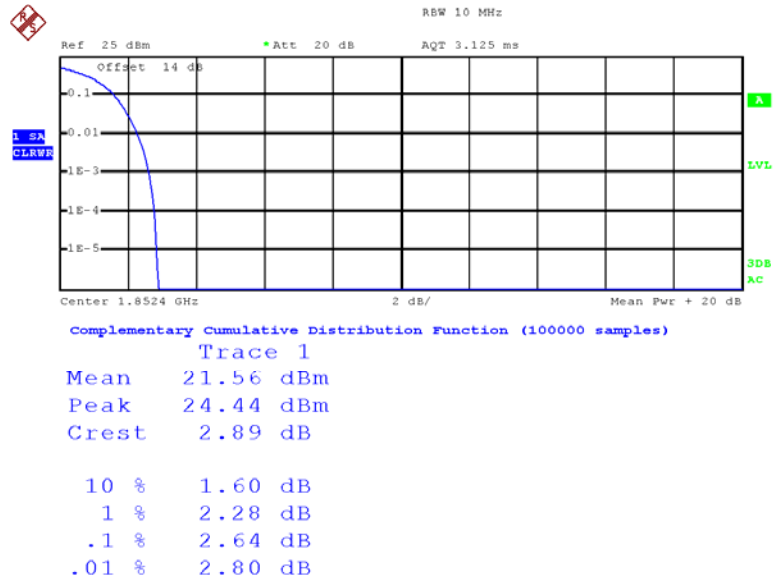


Date: 27.OCT.2015 17:58:46

Middle Channel

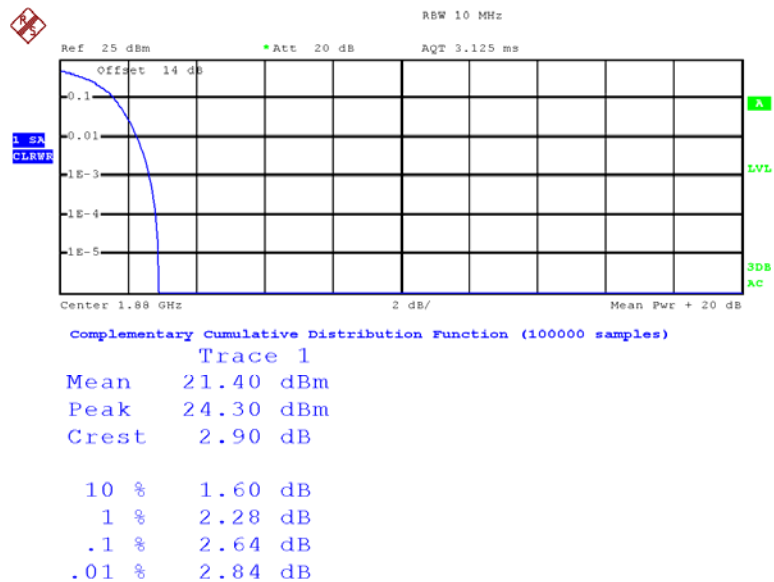


Date: 27.OCT.2015 17:58:06


High Channel

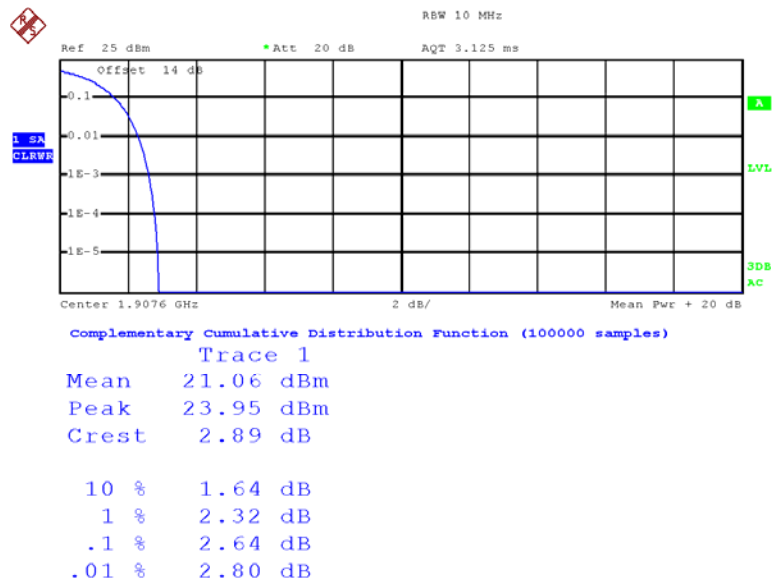


Date: 27.OCT.2015 17:59:21

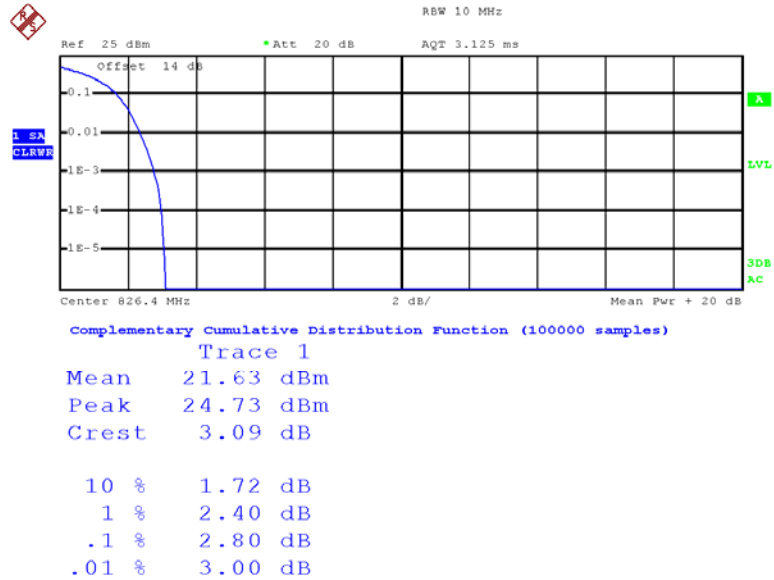WCDMA Band V (PART 22H)**Low Channel**

Date: 27.OCT.2015 17:54:02

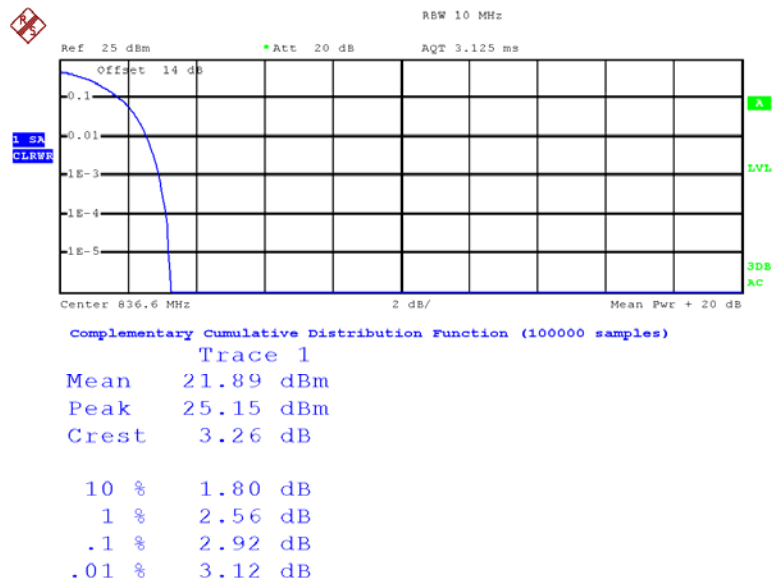Middle Channel

Date: 27.OCT.2015 17:51:09

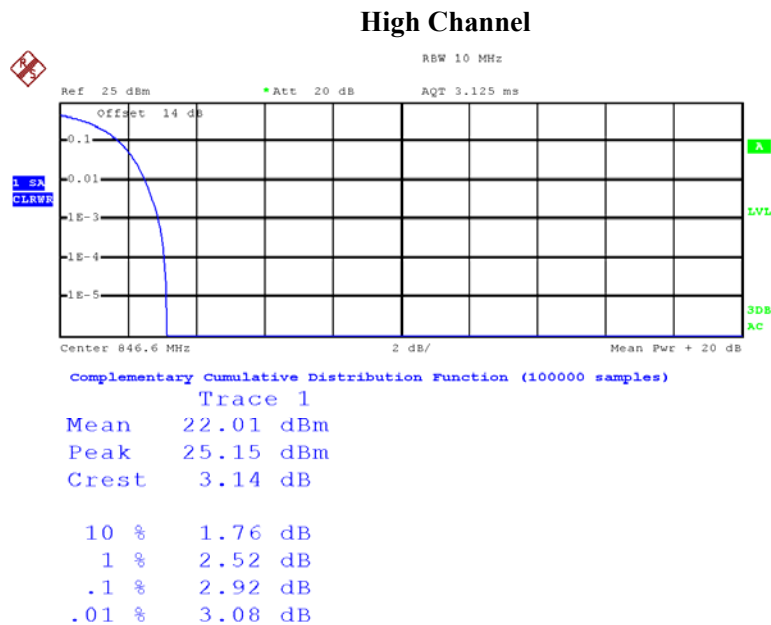

Date: 27.OCT.2015 17:51:58

LTE Band IV

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	22.92	22.76	22.68
		1#3	22.88	22.78	22.67
		1#5	22.65	22.82	22.54
		3#0	22.11	21.88	22.11
		3#1	22.17	22.14	21.62
		3#3	22.04	22.10	21.92
		6#0	21.50	21.57	21.37
	16-QAM	1#0	22.15	22.21	22.14
		1#3	22.17	22.08	21.78
		1#5	22.01	22.36	21.85
		3#0	21.41	21.15	21.19
		3#1	20.95	21.00	20.91
		3#3	21.08	21.27	20.90
		6#0	21.56	20.46	20.41
3M	QPSK	1#0	22.61	22.73	22.35
		1#7	22.51	22.51	22.33
		1#14	22.47	22.68	22.52
		8#0	22.48	22.15	21.56
		8#4	22.32	22.09	21.90
		8#7	22.21	22.10	21.75
		15#0	21.53	21.71	21.14
	16-QAM	1#0	22.10	21.94	21.94
		1#7	21.83	22.20	22.16
		1#14	21.97	22.16	21.88
		8#0	21.16	21.33	20.81
		8#4	21.21	21.02	20.75
		8#7	21.24	21.10	20.78
		15#0	20.34	20.58	20.22
5M	QPSK	1#0	22.74	22.62	22.45
		1#12	22.77	22.43	22.27
		1#24	22.65	22.44	22.54
		12#0	22.03	22.16	21.74
		12#6	22.27	21.89	21.89
		12#11	22.04	21.99	21.71
		25#0	21.46	21.39	21.09
	16-QAM	1#0	22.04	22.00	21.78
		1#12	22.26	21.98	21.90
		1#24	22.23	22.45	21.74
		12#0	21.26	21.19	20.78
		12#6	20.87	21.31	20.86
		12#11	21.00	21.38	20.64
		25#0	20.51	20.67	20.43

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	1#0	22.66	22.39	21.87
		1#24	22.66	22.75	22.04
		1#49	22.65	22.48	21.76
		25#0	21.87	22.12	21.41
		25#12	22.15	22.26	21.57
		25#24	21.91	22.24	21.52
		50#0	21.51	21.46	21.00
	16-QAM	1#0	22.25	21.87	21.76
		1#24	22.06	21.76	21.58
		1#49	22.01	21.93	21.76
		25#0	21.25	21.53	21.04
		25#12	21.50	21.52	21.16
		25#24	21.44	21.63	21.26
		50#0	20.10	20.54	20.35
15M	QPSK	1#0	22.94	23.02	22.07
		1#37	22.92	22.99	22.18
		1#74	23.01	22.93	22.43
		36#0	22.05	22.16	21.17
		36#17	22.20	21.94	21.01
		36#35	22.35	22.05	21.27
		75#0	21.59	21.48	20.76
	16-QAM	1#0	22.14	21.78	21.96
		1#37	22.26	22.10	21.76
		1#74	22.02	21.67	21.46
		36#0	21.10	21.27	21.16
		36#17	21.10	21.35	21.03
		36#35	20.95	21.35	20.95
		75#0	20.08	20.69	20.39
20M	QPSK	1#0	22.50	22.75	22.05
		1#49	22.70	22.86	22.07
		1#99	22.83	22.85	22.22
		50#0	22.41	22.18	21.38
		50#24	22.09	21.76	21.56
		50#49	22.06	21.38	21.56
		100#0	21.43	20.56	20.62
	16-QAM	1#0	22.11	21.64	21.52
		1#49	22.13	21.96	21.71
		1#99	21.91	21.82	21.94
		50#0	21.25	21.06	20.71
		50#24	21.05	20.91	20.63
		50#49	21.17	20.96	21.04
		100#0	20.49	20.78	20.01


LTE Band VII

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	22.78	23.00	22.57
		1#12	22.69	22.97	22.47
		1#24	22.72	22.96	22.42
		12#0	22.02	22.28	21.83
		12#6	22.11	22.38	21.86
		12#11	22.00	22.21	21.73
		25#0	21.65	21.91	21.41
	16-QAM	1#0	21.54	21.80	21.28
		1#12	21.52	21.73	21.28
		1#24	21.61	21.84	21.39
		12#0	21.11	21.32	20.79
		12#6	21.05	21.24	20.82
		12#11	21.17	21.39	20.94
		25#0	20.76	20.99	20.50
10M	QPSK	1#0	22.78	22.99	22.56
		1#24	22.85	23.04	22.53
		1#49	22.70	22.93	22.43
		25#0	22.01	22.21	21.68
		25#12	22.04	22.27	21.86
		25#24	22.01	22.20	21.76
		50#0	21.75	21.95	21.55
	16-QAM	1#0	22.05	22.31	21.94
		1#24	22.13	22.39	21.85
		1#49	22.07	22.29	21.81
		25#0	21.31	21.50	20.96
		25#12	21.21	21.42	20.94
		25#24	21.27	21.50	21.08
		50#0	20.76	20.99	20.54


Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	22.85	23.08	22.67
		1#37	22.80	23.05	22.64
		1#74	22.75	22.99	22.48
		36#0	21.87	22.13	21.68
		36#17	21.88	22.14	21.65
		36#35	21.94	22.19	21.76
		75#0	21.67	21.95	21.42
	16-QAM	1#0	22.11	22.31	21.88
		1#37	22.10	22.34	21.92
		1#74	22.03	22.25	21.83
		36#0	21.38	21.62	21.18
		36#17	21.53	21.73	21.27
		36#35	21.36	21.59	21.06
		75#0	20.80	21.02	20.57
20M	QPSK	1#0	22.73	22.94	22.43
		1#49	22.81	23.04	22.60
		1#99	22.73	22.94	22.41
		50#0	21.64	21.84	21.34
		50#24	21.78	22.01	21.55
		50#49	21.67	21.92	21.45
		100#0	21.93	22.13	21.70
	16-QAM	1#0	21.98	22.17	21.75
		1#49	21.95	22.22	21.82
		1#99	21.92	22.15	21.72
		50#0	21.14	21.42	20.96
		50#24	21.31	21.51	21.04
		50#49	21.29	21.57	21.06
		100#0	20.81	21.05	20.55

Peak-to-average ratio (PAR)

LTE Band	Test Modulation		Test Bandwidth	Low Channel (dB)	Middle Channel (dB)	High Channel (dB)	Limit (dB)
Band 4	QPSK	1 RB	20M	4.84	5.16	3.68	13
		Full RB		6.28	6.36	6.28	13
	16-QAM	1 RB		5.20	6.04	4.44	13
		Full RB		7.08	7.20	6.96	13
Band 7	QPSK	1 RB	20M	2.04	2.56	3.00	13
		Full RB		6.64	6.32	6.24	13
	16-QAM	1 RB		2.72	2.80	4.68	13
		Full RB		7.32	6.96	7.00	13

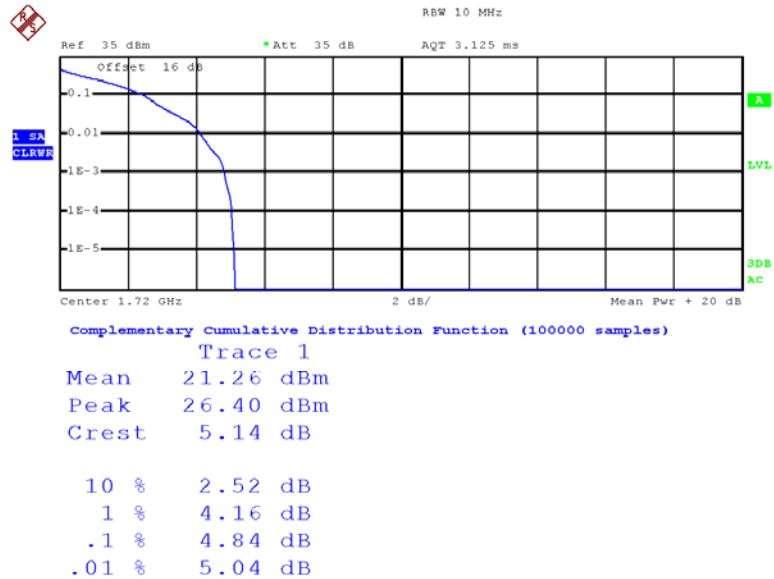
LTE Band 4**QPSK- RB#1 Low Channel**

Date: 15.OCT.2015 23:35:10

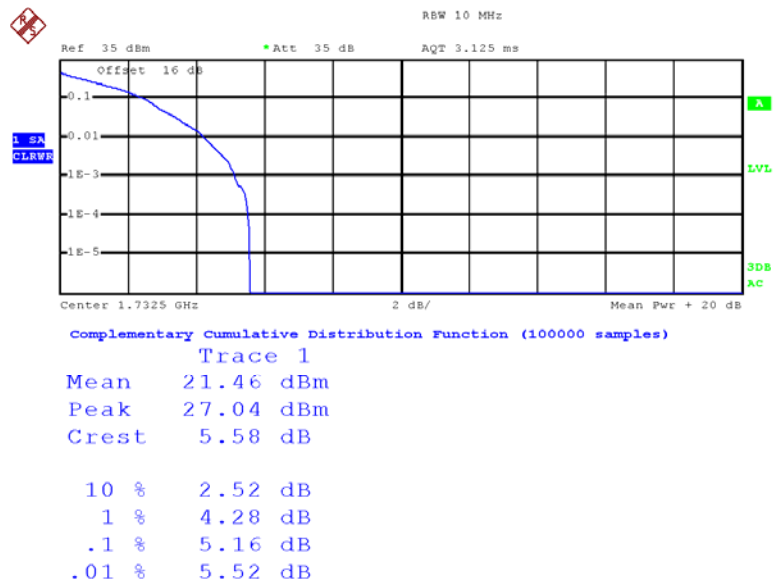QPSK- RB#1 Middle Channel


Date: 15.OCT.2015 23:32:32

QPSK- RB#1 High Channel

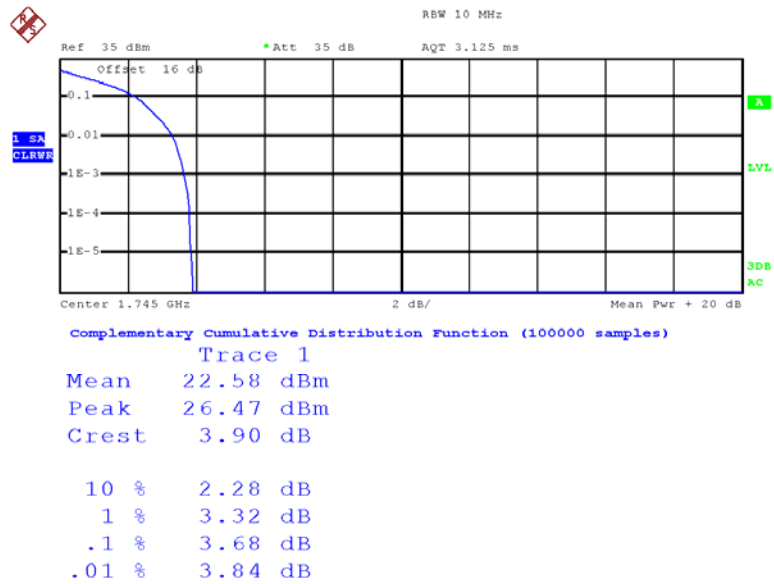


Date: 15.OCT.2015 23:31:06

QPSK- RB#100 Low Channel

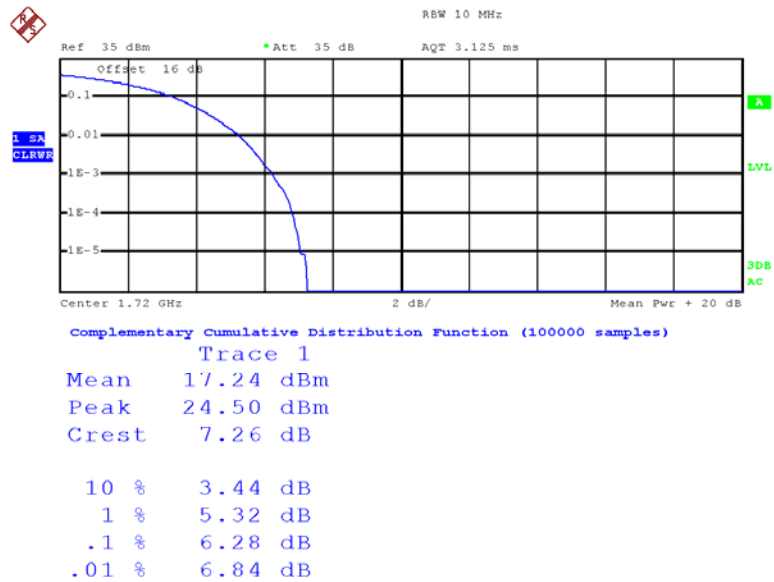


Date: 15.OCT.2015 23:21:50

QPSK- RB#100 Middle Channel

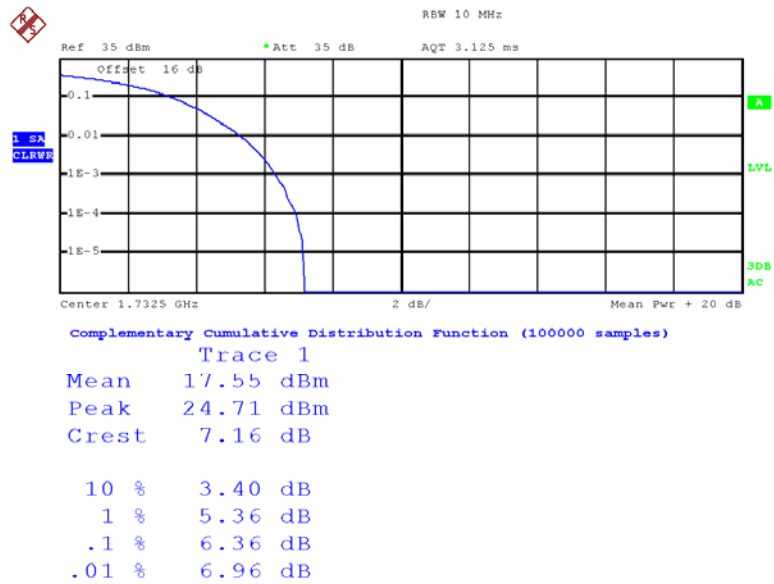


Date: 15.OCT.2015 23:25:10

QPSK- RB#100 High Channel

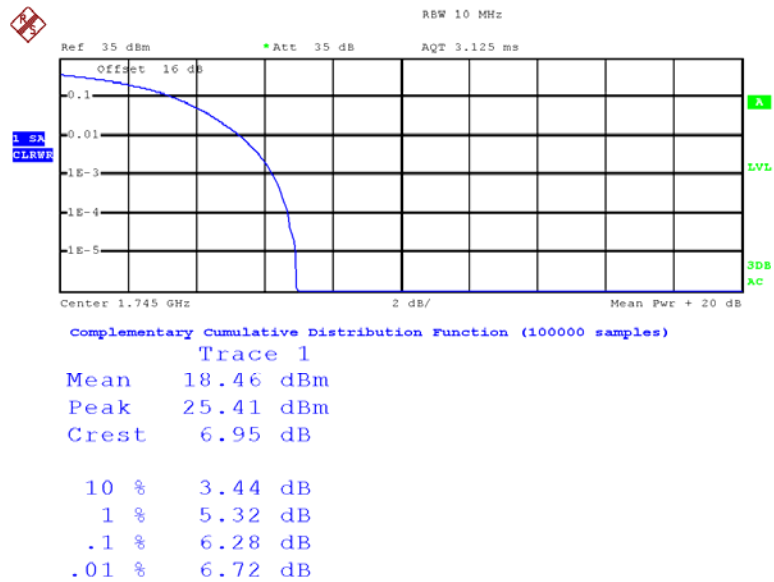


Date: 15.OCT.2015 23:27:48

16QAM- RB#1 Low Channel

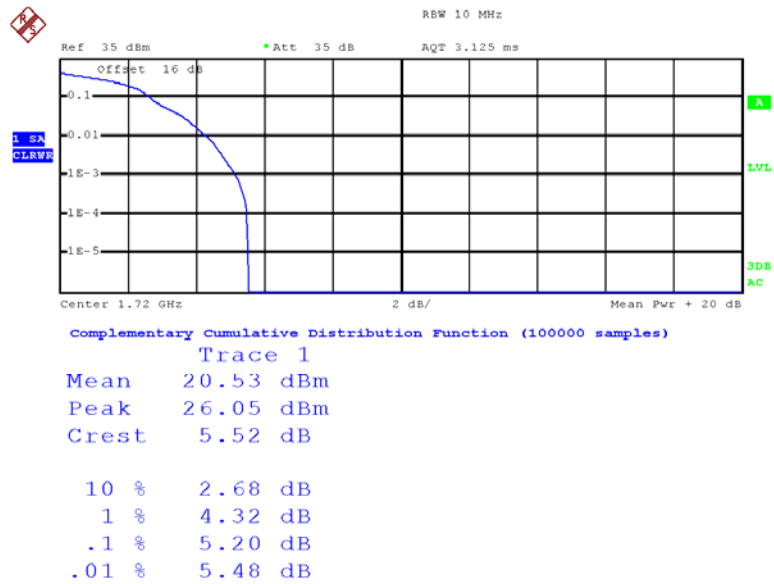


Date: 15.OCT.2015 23:34:57


16QAM- RB#1 Middle Channel

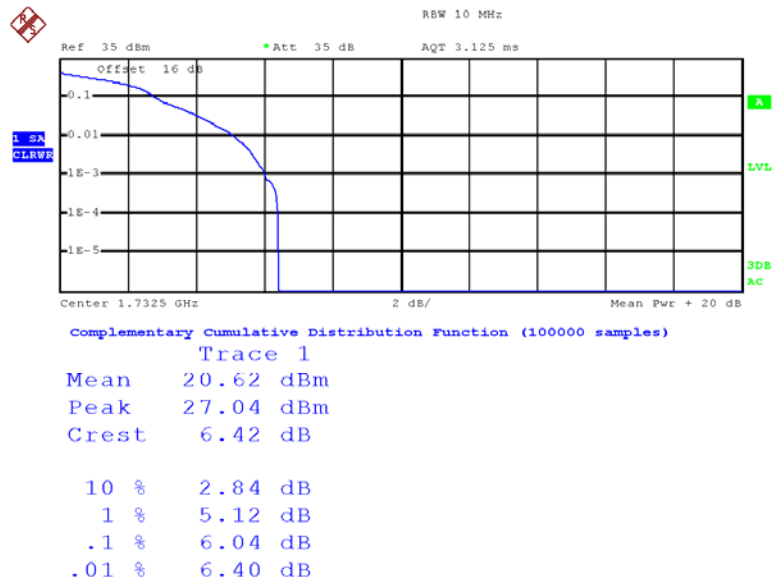


Date: 15.OCT.2015 23:32:48

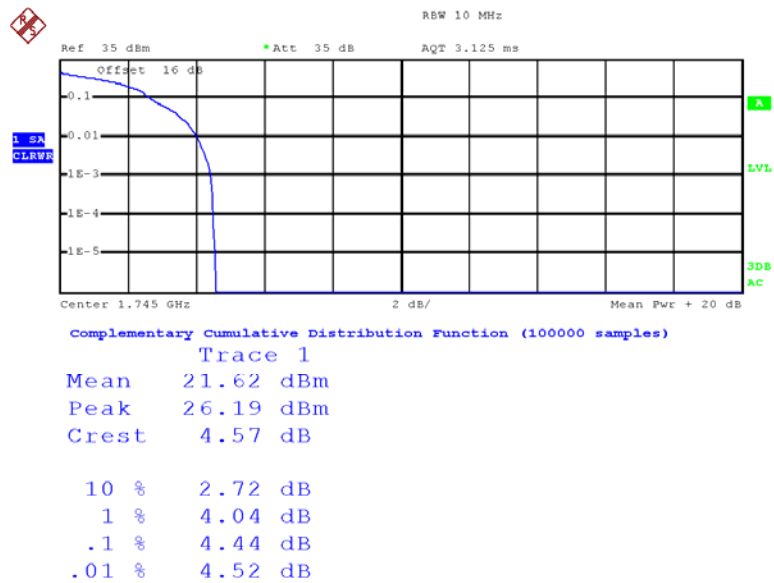16QAM- RB#1 High Channel


Date: 15.OCT.2015 23:30:39

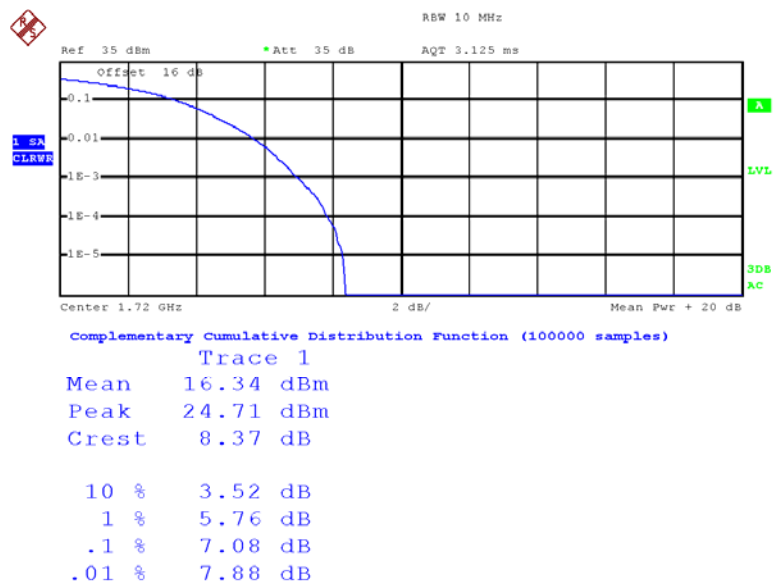16QAM- RB#100 Low Channel

Date: 15.OCT.2015 23:22:21

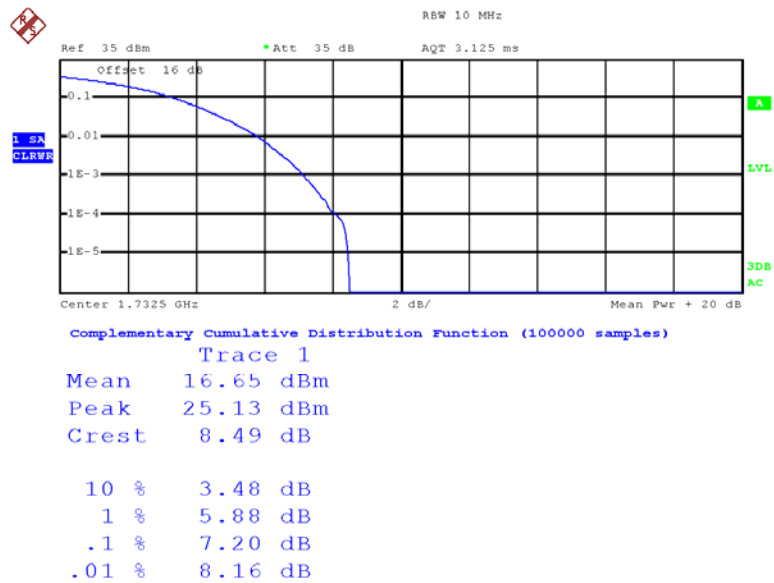16QAM- RB#100 Middle Channel


Date: 15.OCT.2015 23:24:20

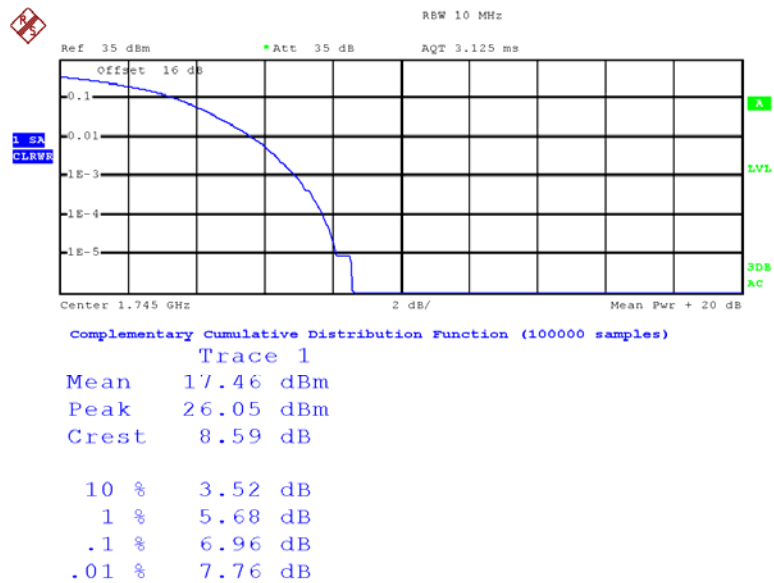16QAM- RB#100 High Channel

Date: 15.OCT.2015 23:28:19


LTE Band 7

QPSK-1RB, 20M Low Channel

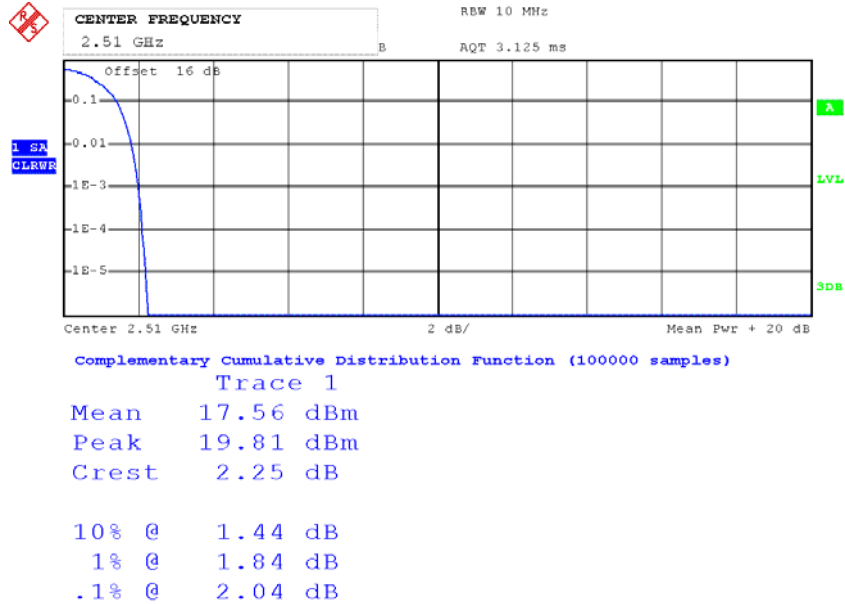


Date: 21.OCT.2015 01:08:36


QPSK-1RB, 20M Middle Channel

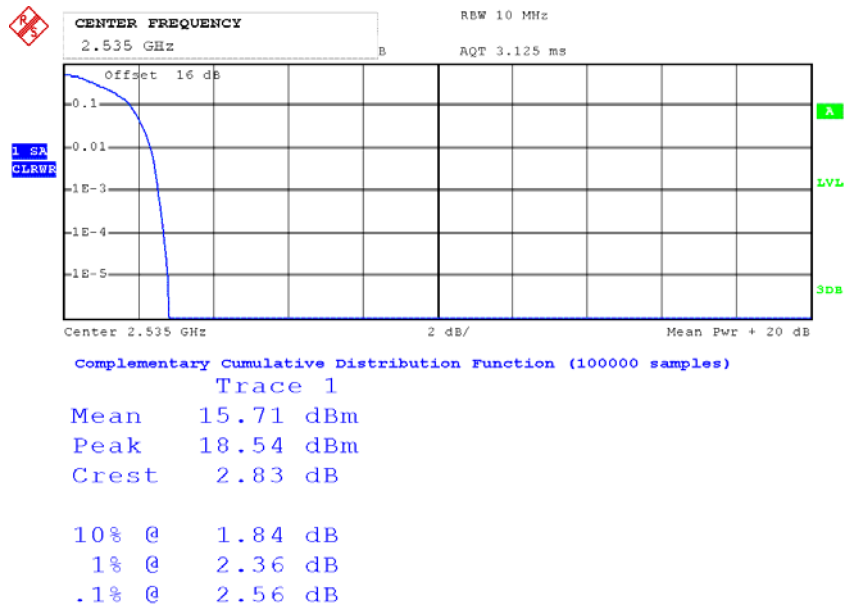


Date: 21.OCT.2015 01:13:44

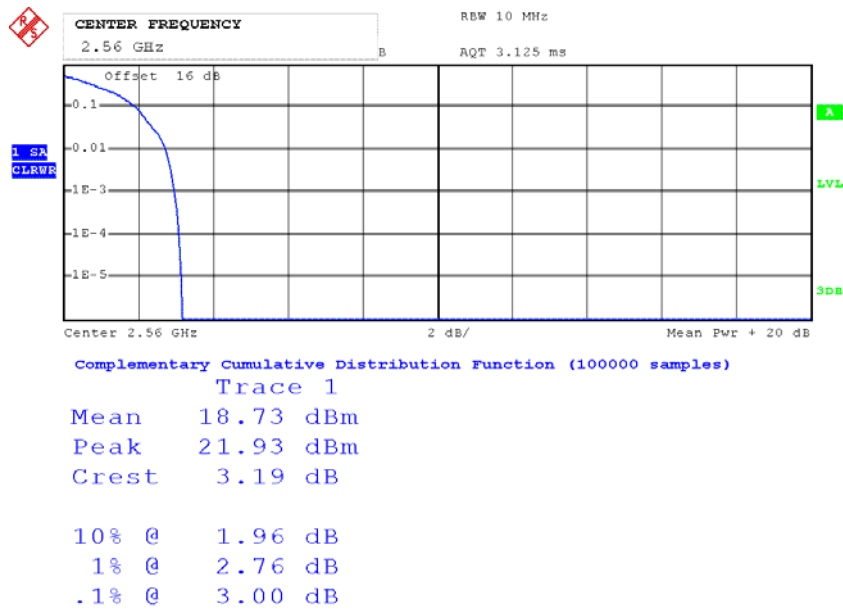QPSK-1RB, 20M High Channel


Date: 21.OCT.2015 01:07:36

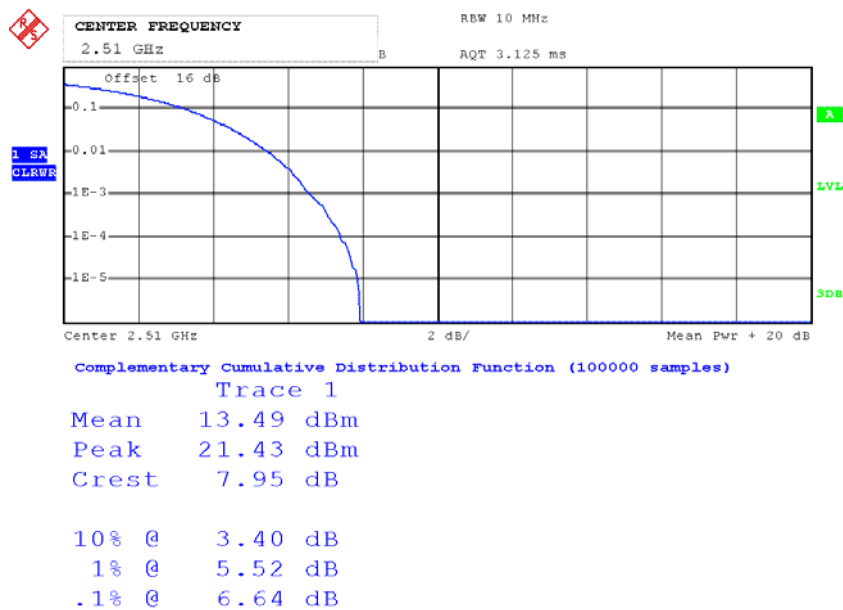QPSK- Full RB, 20M Low Channel

Date: 21.OCT.2015 01:11:08

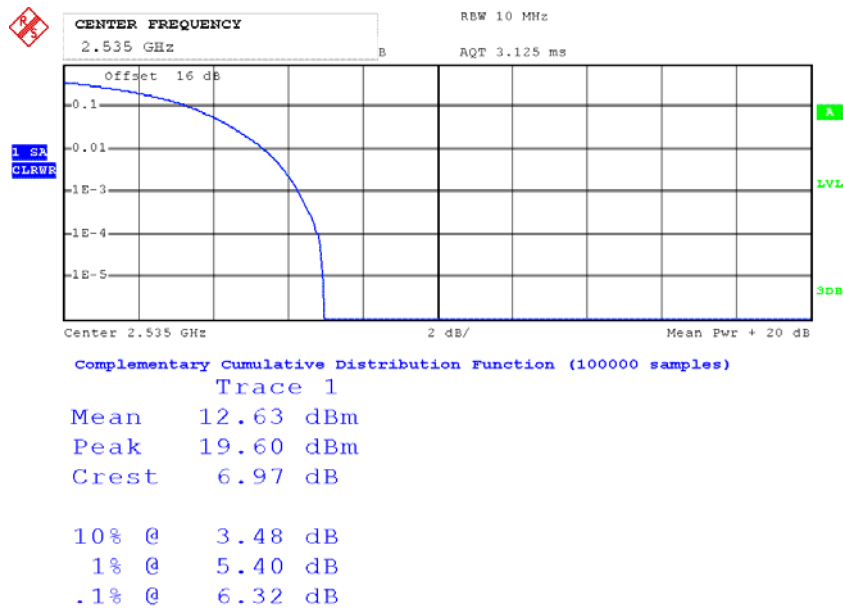
QPSK- Full RB, 20M Middle Channel

Date: 21.OCT.2015 01:12:18

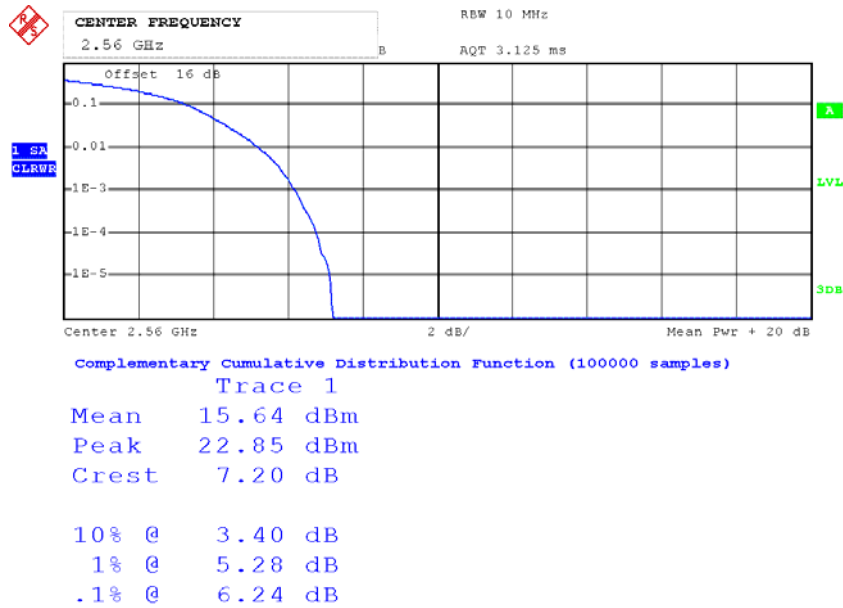QPSK- Full RB, 20M High Channel


Date: 21.OCT.2015 01:04:59

16QAM- 1RB, 20M Low Channel

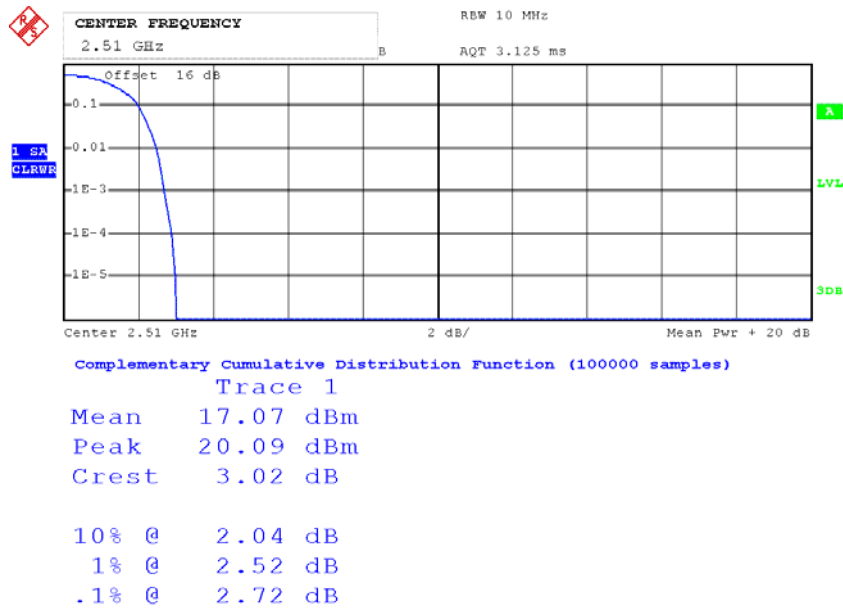


Date: 21.OCT.2015 01:09:13

16QAM- 1RB, 20M Middle Channel

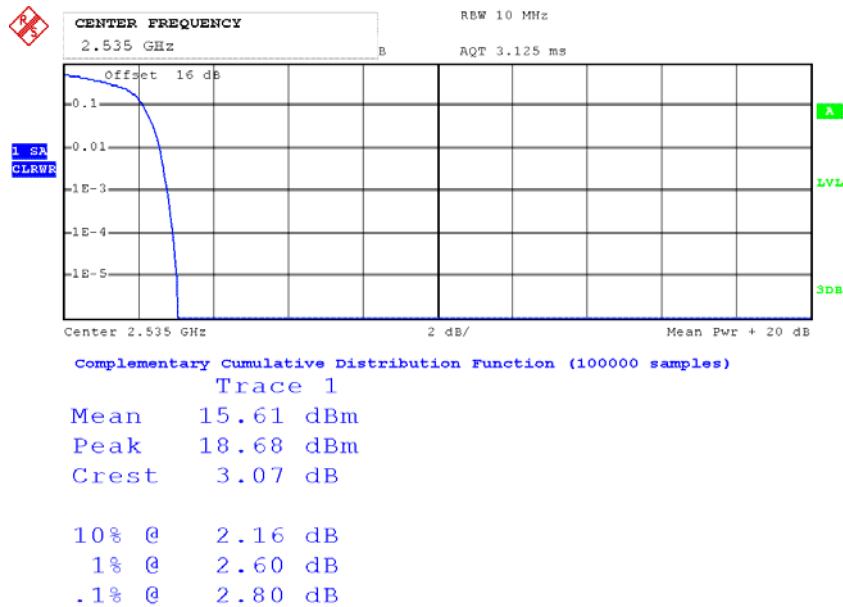


Date: 21.OCT.2015 01:14:39

16QAM- 1RB, 20M High Channel

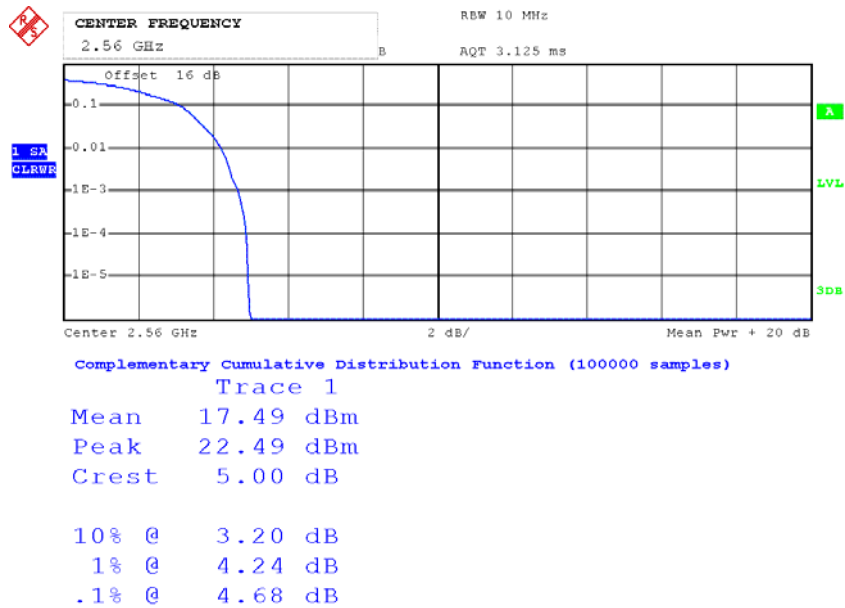


Date: 21.OCT.2015 01:07:10

16QAM- Full RB, 20M Low Channel

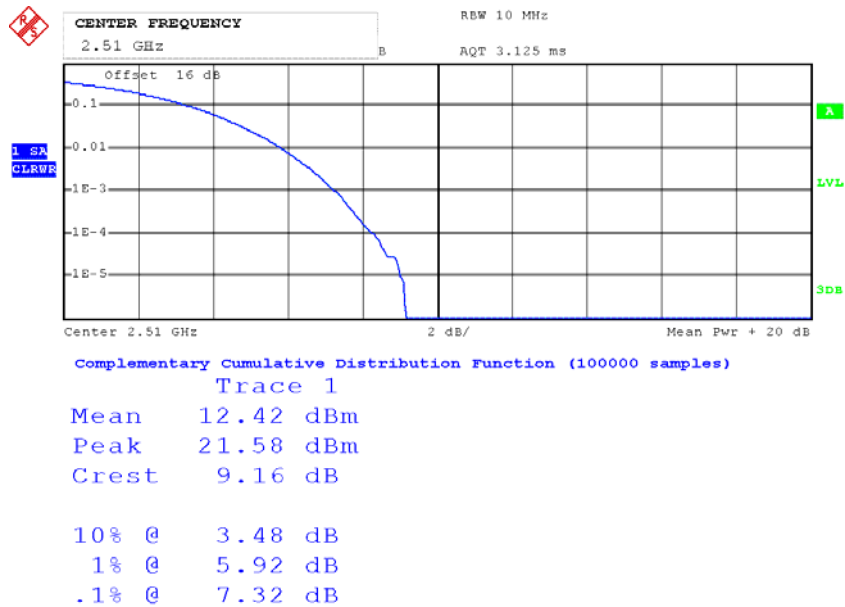


Date: 21.OCT.2015 01:10:32

16QAM- Full RB, 20M Middle Channel

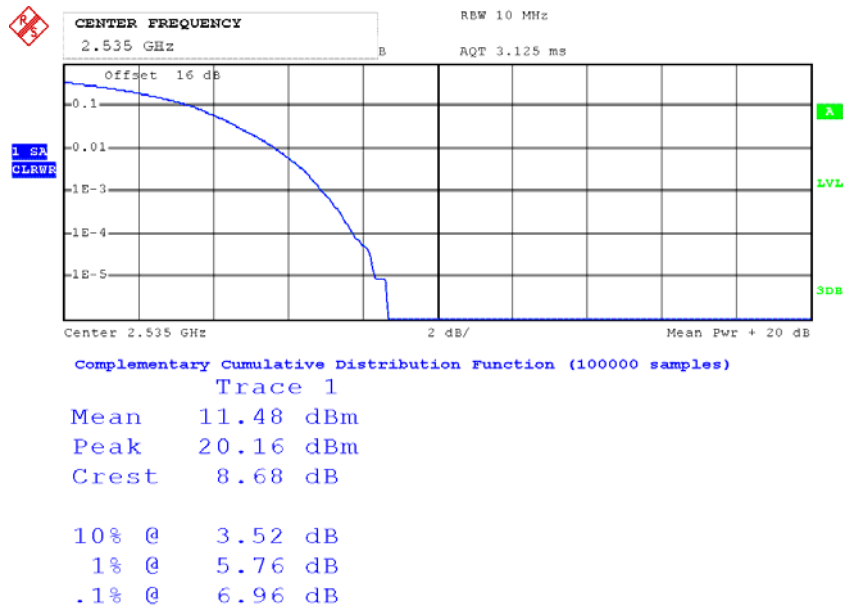

Date: 21.OCT.2015 01:12:31

16QAM- Full RB, 20M High Channel

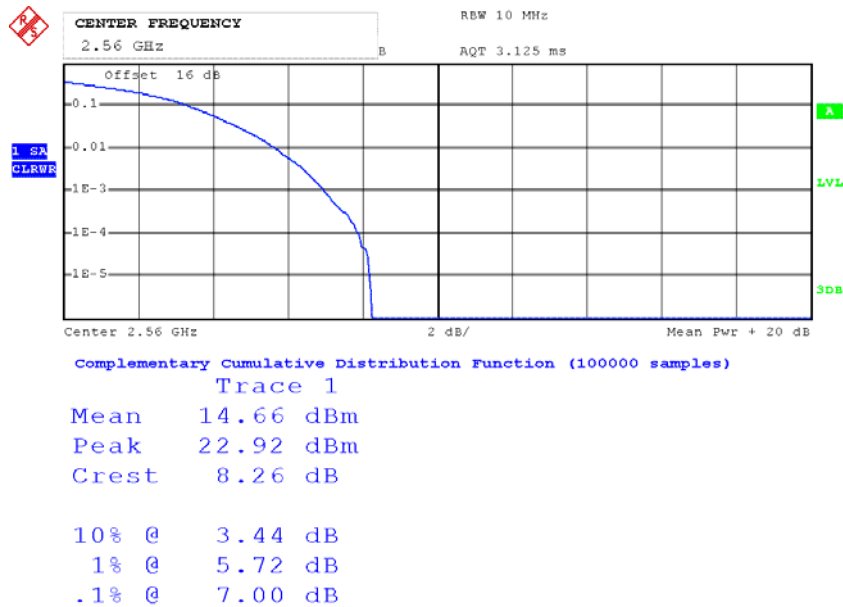

Date: 21.OCT.2015 01:05:30

ERP & EIRP

PART 22H

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 850 Middle Channel								
836.600	H	95.56	20.6	0.0	1.0	19.6	38.5	18.9
836.600	V	103.5	31.7	0.0	1.0	30.7	38.5	7.8
EGPRS 850 Middle Channel								
836.600	H	88.37	13.4	0.0	1.0	12.4	38.5	26.1
836.600	V	97.96	26.2	0.0	1.0	25.2	38.5	13.3
WCDMA Band V Middle Channel								
836.600	H	85.31	10.4	0.0	1.0	9.4	38.5	29.1
836.600	V	92.85	21.1	0.0	1.0	20.1	38.5	18.4

PART 24E

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
PCS 1900 Middle Channel								
1880.000	H	89.37	17.8	11.7	1.4	28.1	33.00	4.9
1880.000	V	84.16	12.7	11.7	1.4	23.0	33.00	10.0
EGPRS 1900 Middle Channel								
1880.000	H	85.60	14	11.7	1.4	24.3	33.0	8.7
1880.000	V	82.47	11	11.7	1.4	21.3	33.0	11.7
WCDMA Band II Middle Channel								
1880.000	H	82.15	10.6	11.7	1.4	20.9	33.0	12.1
1880.000	V	78.34	6.9	11.7	1.4	17.2	33.0	15.8

LTE Band 4

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK 1.4M BW Middle Channel								
1732.500	H	81.70	8.7	8.1	1.4	15.4	30	14.6
1732.500	V	86.50	13.2	8.1	1.4	19.9	30	10.1
QPSK 3M BW Middle Channel								
1732.500	H	80.28	7.3	8.1	1.4	14	30	16
1732.500	V	85.13	11.8	8.1	1.4	18.5	30	11.5
QPSK 5M BW Middle Channel								
1732.500	H	78.79	5.8	8.1	1.4	12.5	30	17.5
1732.500	V	83.62	10.3	8.1	1.4	17	30	13
QPSK 10M BW Middle Channel								
1732.500	H	77.31	4.3	8.1	1.4	11	30	19
1732.500	V	82.21	8.9	8.1	1.4	15.6	30	14.4
QPSK 15M BW Middle Channel								
1732.500	H	76.25	3.2	8.1	1.4	9.9	30	20.1
1732.500	V	81.34	8	8.1	1.4	14.7	30	15.3
QPSK 20M BW Middle Channel								
1732.500	H	75.57	2.6	8.1	1.4	9.3	30	20.7
1732.500	V	80.61	7.3	8.1	1.4	14	30	16
16-QAM 1.4M BW Middle Channel								
1732.500	H	81.51	8.5	8.1	1.4	15.2	30	14.8
1732.500	V	86.24	12.9	8.1	1.4	19.6	30	10.4
16-QAM 3M BW Middle Channel								
1732.500	H	80.03	7	8.1	1.4	13.7	30	16.3
1732.500	V	84.72	11.4	8.1	1.4	18.1	30	11.9
16-QAM 5M BW Middle Channel								
1732.500	H	78.52	5.5	8.1	1.4	12.2	30	17.8
1732.500	V	83.15	9.8	8.1	1.4	16.5	30	13.5
16-QAM 10M BW Middle Channel								
1732.500	H	77.11	4.1	8.1	1.4	10.8	30	19.2
1732.500	V	81.69	8.4	8.1	1.4	15.1	30	14.9
16-QAM 15M BW Middle Channel								
1732.500	H	75.47	2.5	8.1	1.4	9.2	30	20.8
1732.500	V	80.23	6.9	8.1	1.4	13.6	30	16.4
16-QAM 20M BW Middle Channel								
1732.500	H	74.82	1.8	8.1	1.4	8.5	30	21.5
1732.500	V	79.64	6.3	8.1	1.4	13	30	17

LTE Band 7

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK 5M BW Middle Channel								
2535.000	H	81.60	10.4	9.5	2.5	17.4	33.00	15.6
2535.000	V	81.78	12	9.5	2.5	19.0	33.00	14.0
QPSK 10M BW Middle Channel								
2535.000	H	81.14	9.9	9.5	2.5	16.9	33.00	16.1
2535.000	V	81.53	11.8	9.5	2.5	18.8	33.00	14.2
QPSK 15M BW Middle Channel								
2535.000	H	80.88	9.7	9.5	2.5	16.7	33.00	16.3
2535.000	V	81.63	11.9	9.5	2.5	18.9	33.00	14.1
QPSK 20M BW Middle Channel								
2535.000	H	80.71	9.5	9.5	2.5	16.5	33.00	16.5
2535.000	V	81.41	11.7	9.5	2.5	18.7	33.00	14.3
16-QAM 5M BW Middle Channel								
2535.000	H	82.09	10.9	9.5	2.5	17.9	33.00	15.1
2535.000	V	82.43	12.7	9.5	2.5	19.7	33.00	13.3
16-QAM 10M BW Middle Channel								
2535.000	H	81.52	10.3	9.5	2.5	17.3	33.00	15.7
2535.000	V	81.06	11.3	9.5	2.5	18.3	33.00	14.7
16-QAM 15M BW Middle Channel								
2535.000	H	81.14	9.9	9.5	2.5	16.9	33.00	16.1
2535.000	V	80.83	11.1	9.5	2.5	18.1	33.00	14.9
16-QAM 20M BW Middle Channel								
2535.000	H	79.77	8.6	9.5	2.5	15.6	33.00	17.4
2535.000	V	80.32	10.6	9.5	2.5	17.6	33.00	15.4

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = SG Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level


FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH**Applicable Standard**

FCC §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

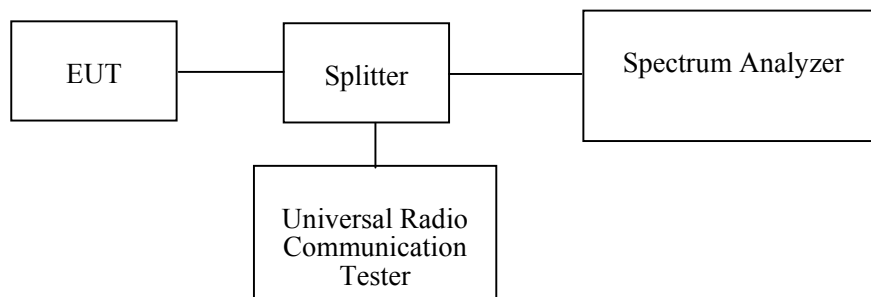**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
R&S	Universal Radio Communication Tester	CMU200	109038	2015-05-09	2016-05-09
R&S	Wideband Radio Communication Tester	CMW500	106891	2014-12-19	2015-12-19

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.7~27 °C
Relative Humidity:	46~50%
ATM Pressure:	100.2~100.8 kPa


The testing was performed by Dean Liu from 2015-10-14 to 2015-10-20.

Test Mode: Transmitting


Test Result: Compliance. Please refer to the following table and plots.

Band	Channel No.	Mode	99% Occupied Bandwidth (kHz)	26 dB Occupied Bandwidth (kHz)
Cellular	190	GSM	246	313
		EDGE	255	319
PCS	661	PCS	246	319
		EDGE	251	315
WCDMA Band II	9400	Rel 99	4228	4910
	9400	HSDPA	4228	4890
	9400	HSUPA	4228	4910
WCDMA Band V	4183	Rel 99	4168	4689
	4183	HSDPA	4188	4729
	4183	HSUPA	4188	4709


GMSK 850 Cellular Band

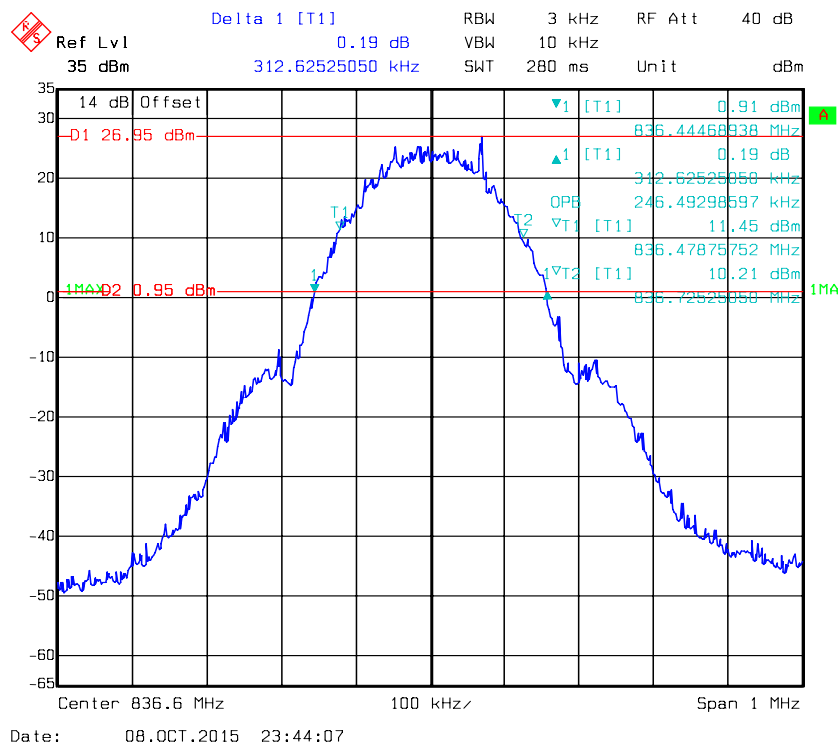

EDGE 850 Cellular Band

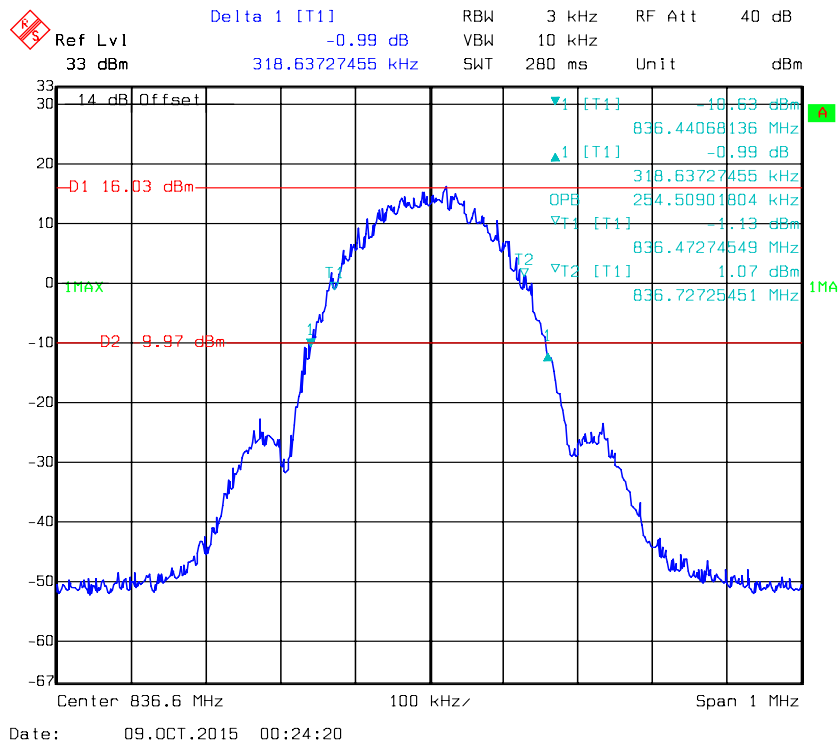

GMSK PCS Band

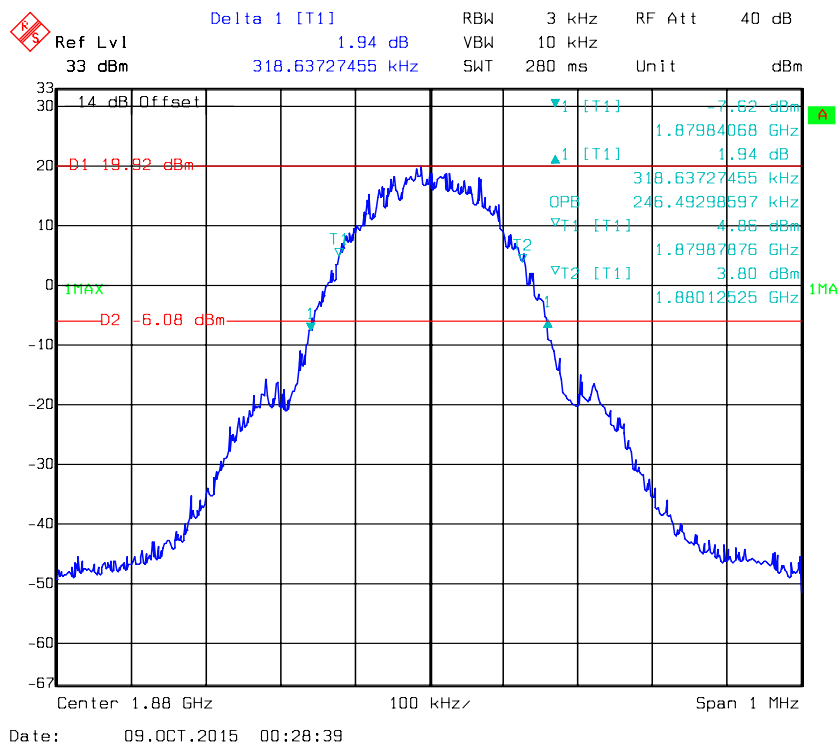

Ref Lvl 33 dBm Delta 1 [T1] 0.64 dB RBW 3 kHz RF Att 30 dB

33 dBm 314.62925852 kHz VBW 10 kHz Unit dBm

14 dB Offset

-D1 15.02 dBm

1.87984269 GHz 1.87984269 GHz

0.64 dB

314.62925852 kHz

OPB 250.50100200 kHz

77.1 [T1] 0.00 dBm

1.87987475 GHz

-0.27 dBm


1.88012525 GHz

1MAX



D2 -10.98 dBm

Center 1.88 GHz 100 kHz Span 1 MHz


REL99 Band II

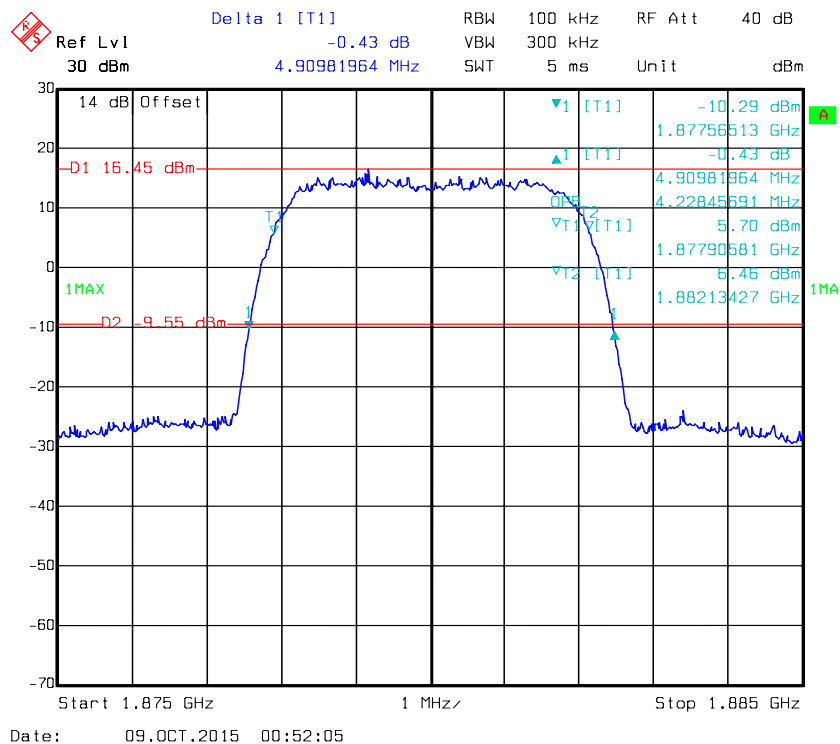

Date: 09.OCT.2015 00:52:05

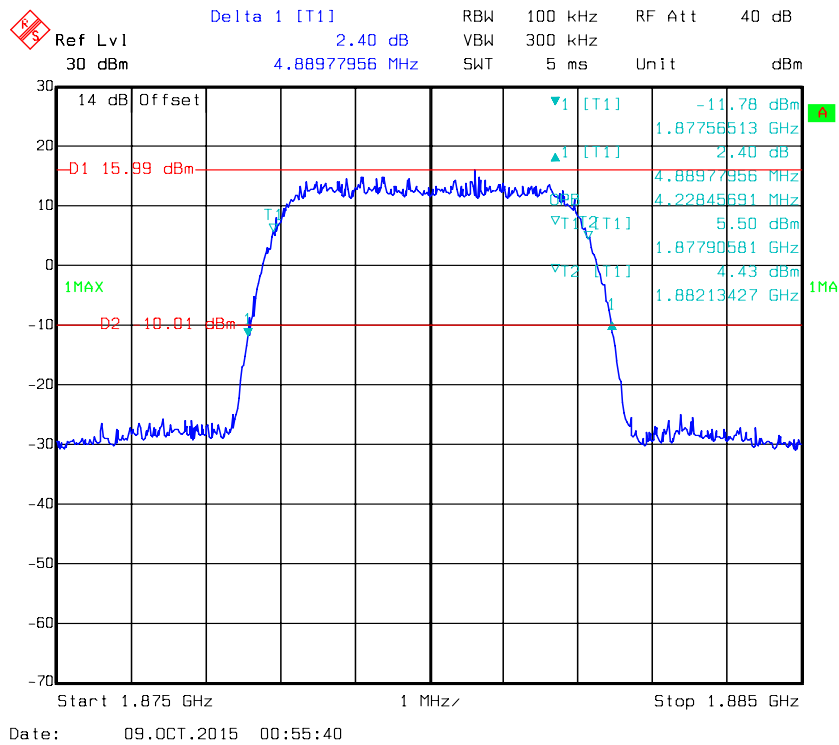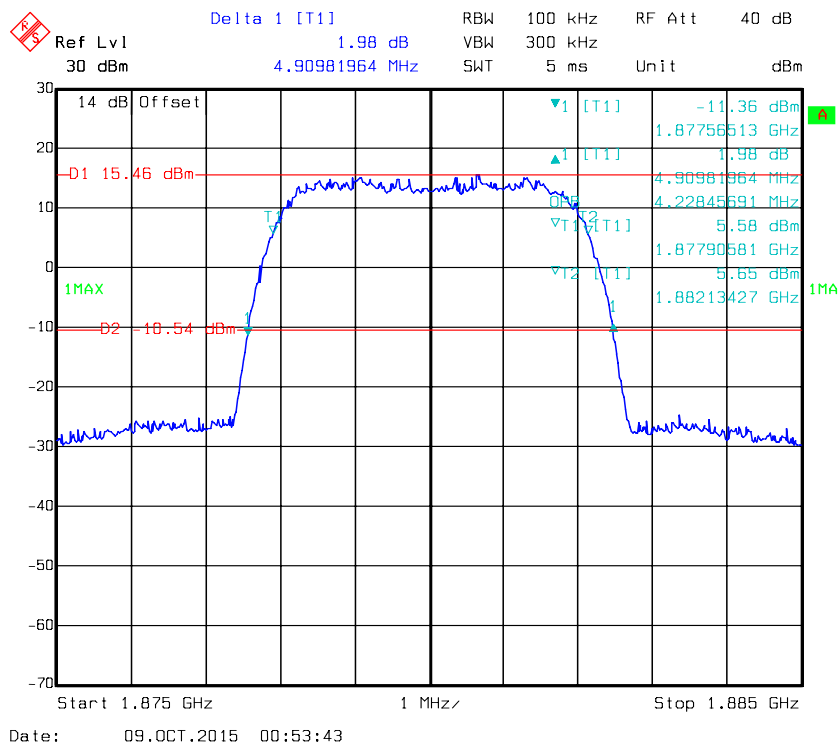
HSDPA Band II**HSUPA Band II**

REL99 Band V

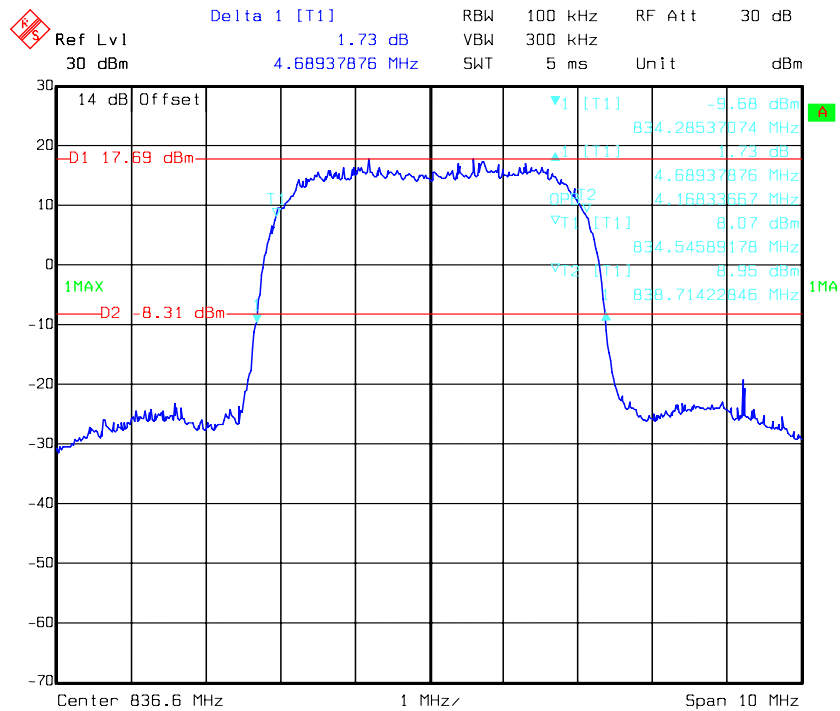


Date: 13.OCT.2015 22:09:13

HSDPA Band V

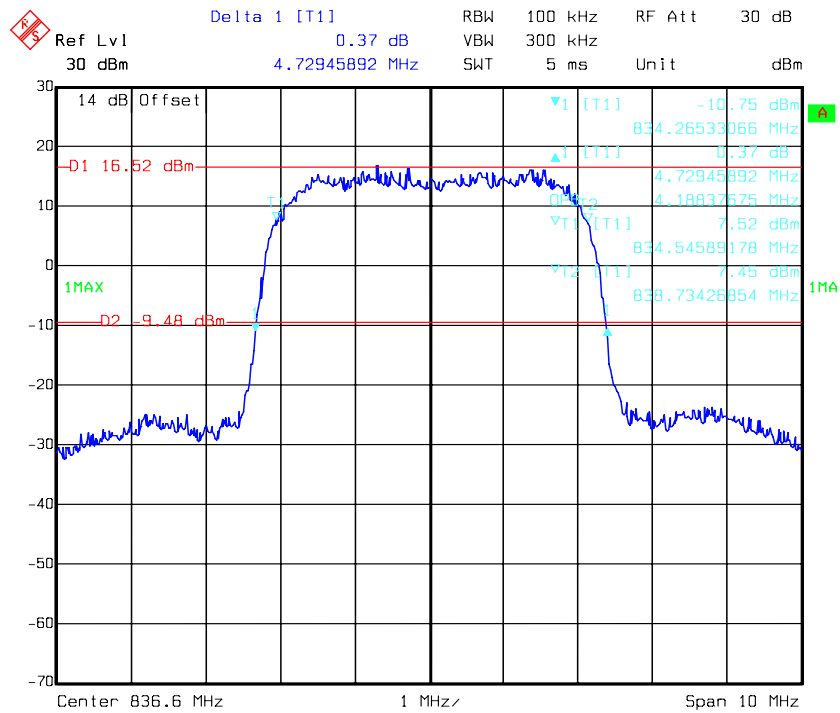


Date: 13.OCT.2015 22:12:40

HSUPA Band V

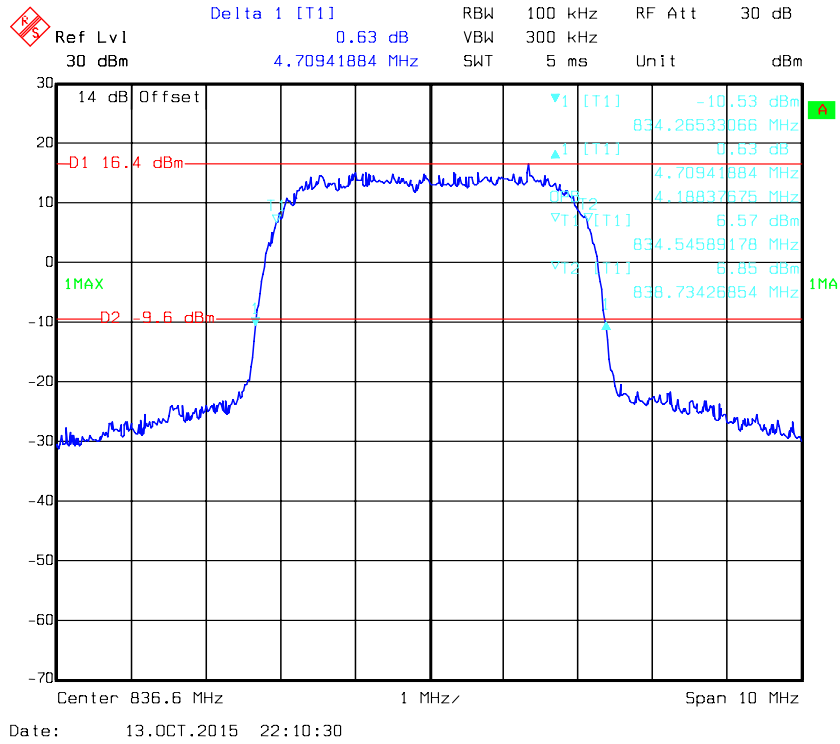


LTE Band	Test Modulation	Test Bandwidth	Test Channel	99% Occupied Bandwidth	26 dB Bandwidth
				MHz	MHz
Band 4	QPSK	1.4M	Middle	1.098	1.284
		3M		2.736	3.012
		5M		4.54	5
		10M		9.12	10.36
		15M		13.62	15
		20M		18	19.6
	16-QAM	1.4M	Middle	1.098	1.272
		3M		2.748	3.036
		5M		4.54	5.12
		10M		9.12	10.32
		15M		13.5	14.94
		20M		18.08	19.68
Band 7	QPSK	5M	Middle	4.549	5.05
		10M		9.178	10.301
		15M		13.587	14.97
		20M		18.036	19.399
	16-QAM	5M	Middle	4.549	5.05
		10M		9.138	10.22
		15M		13.527	14.97
		20M		18.116	19.399

QPSK, Band 4-1.4M

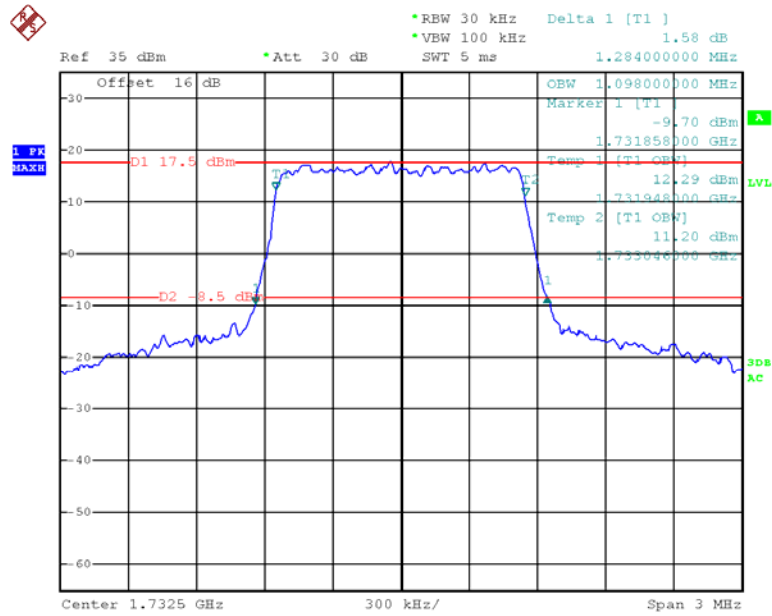


Date: 14.OCT.2015 22:44:55

QPSK, Band 4-3M

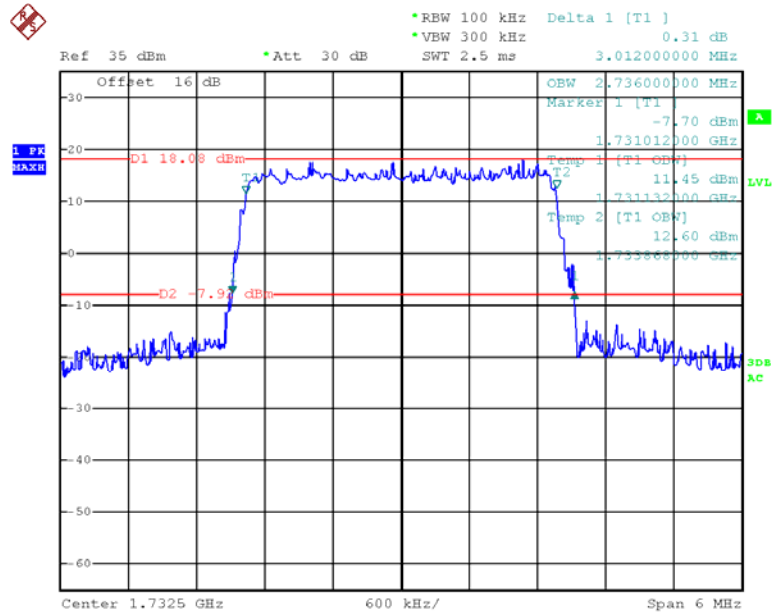


Date: 14.OCT.2015 23:04:21

QPSK, Band 4-5M

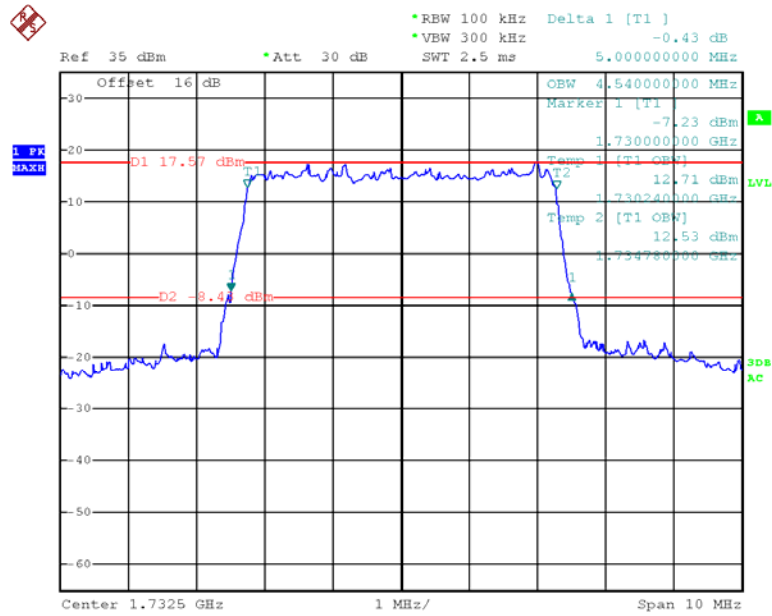


Date: 14.OCT.2015 23:09:04

QPSK, Band 4-10M

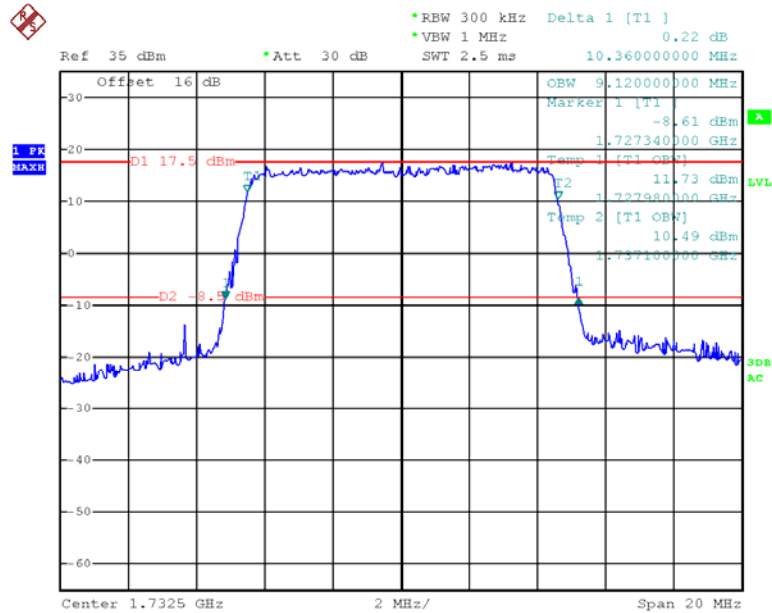


Date: 14.OCT.2015 23:21:56

QPSK, Band 4-15M

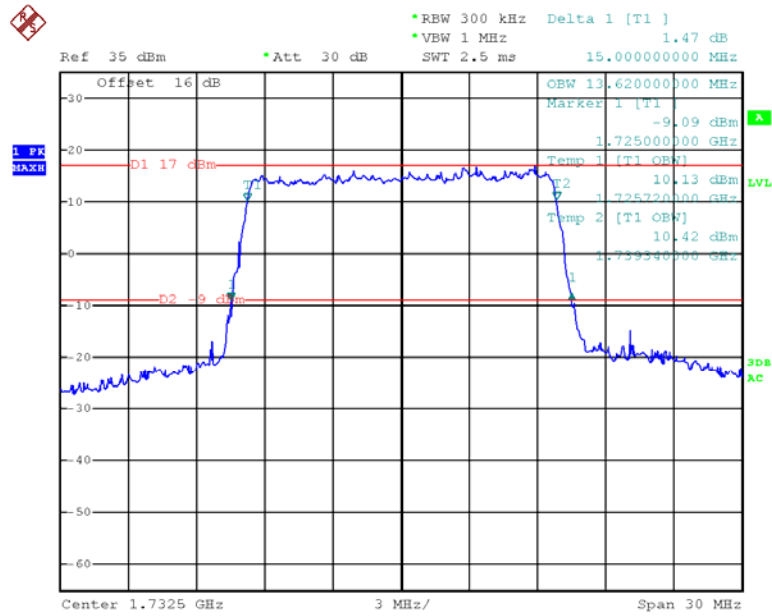


Date: 14.OCT.2015 23:29:57

QPSK, Band 4-20M

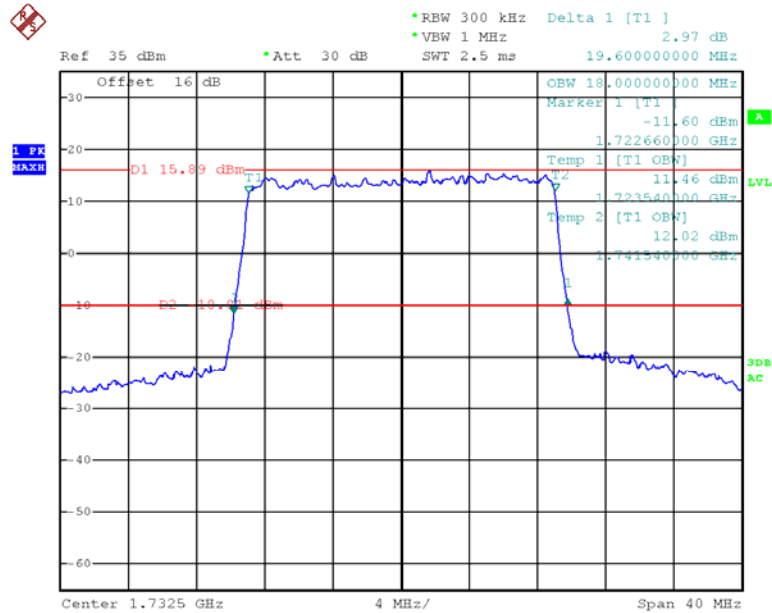


Date: 14.OCT.2015 23:43:50

16-QAM, Band 4-1.4M

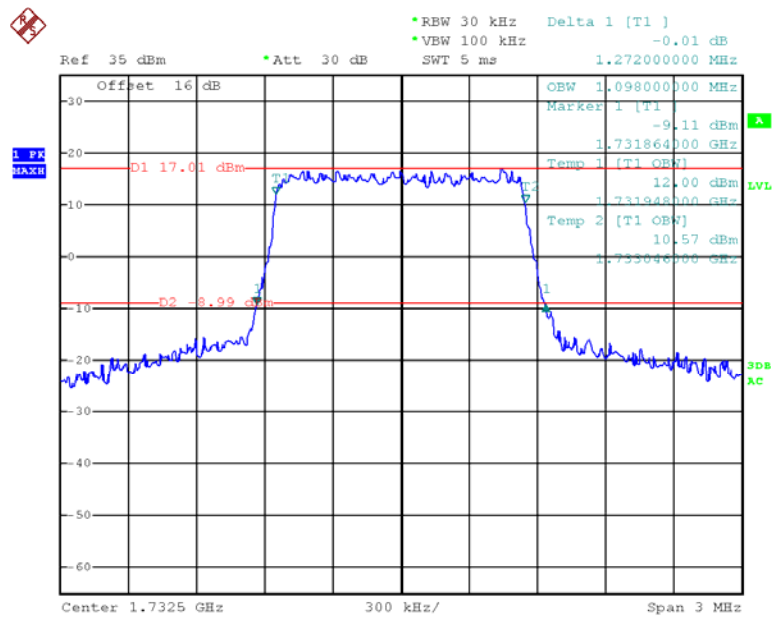


Date: 14.OCT.2015 22:46:34

16-QAM, Band 4-3M

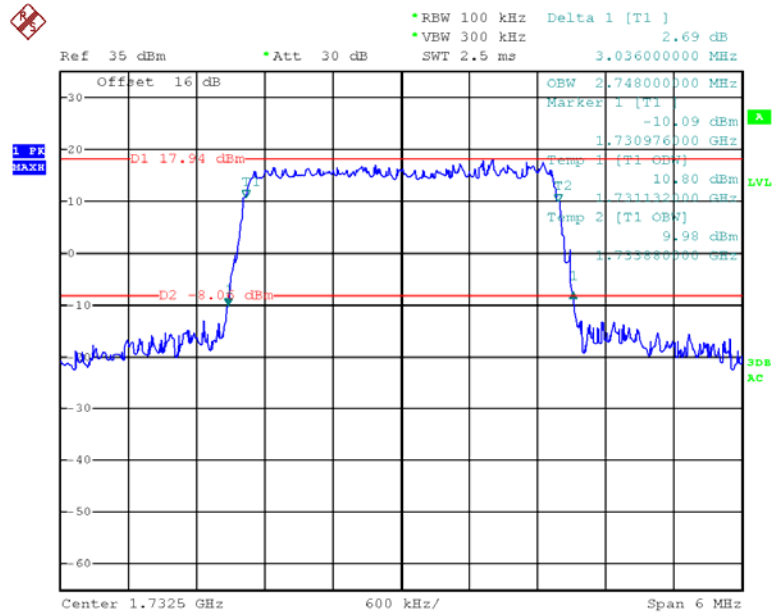


Date: 14.OCT.2015 23:03:04

16-QAM, Band 4-5M

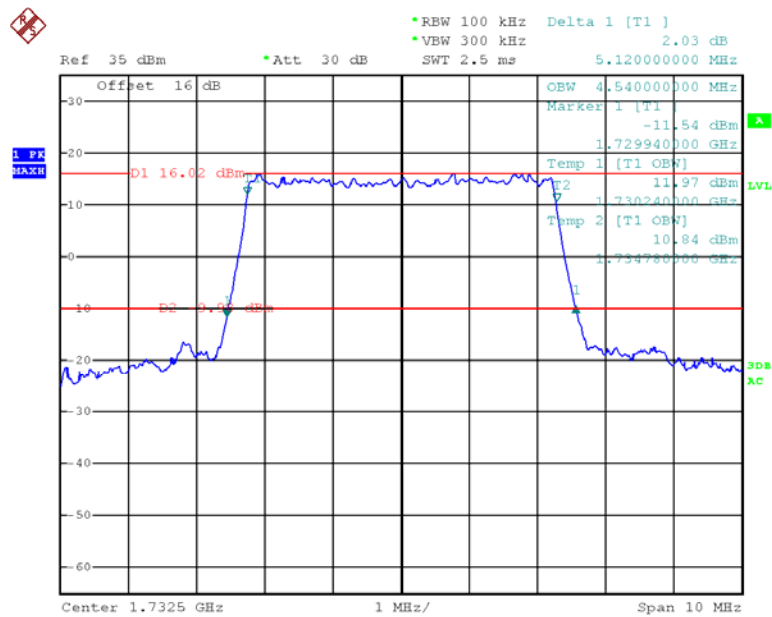


Date: 14.OCT.2015 23:11:24


16-QAM, Band 4-10M

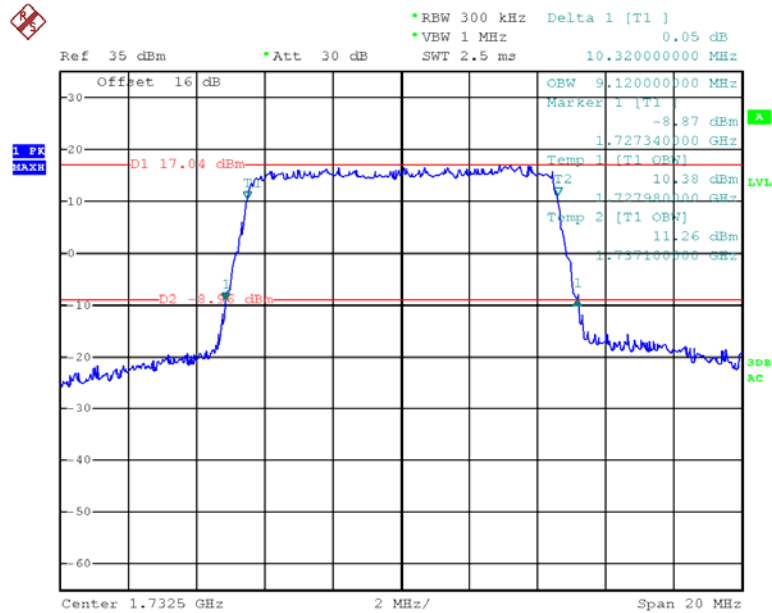

Date: 14.OCT.2015 23:20:10

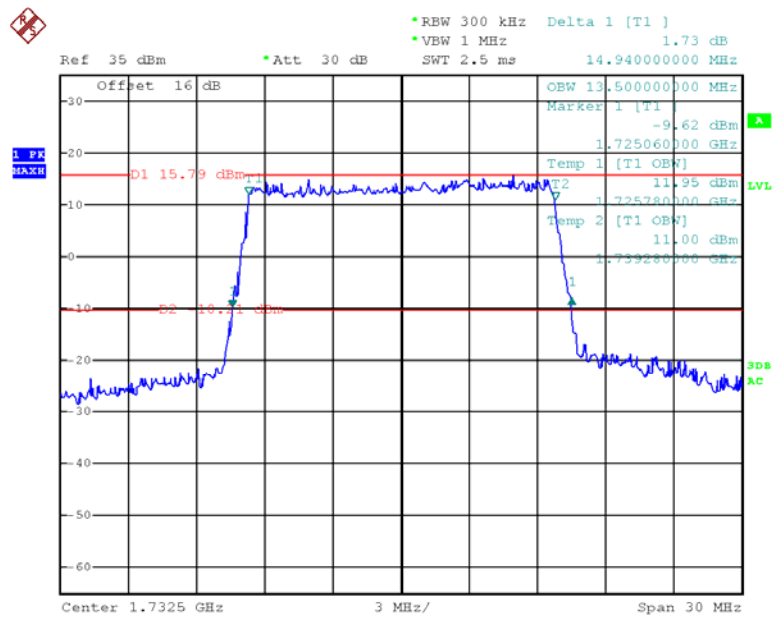
16-QAM, Band 4-15M

Date: 14.OCT.2015 23:28:30

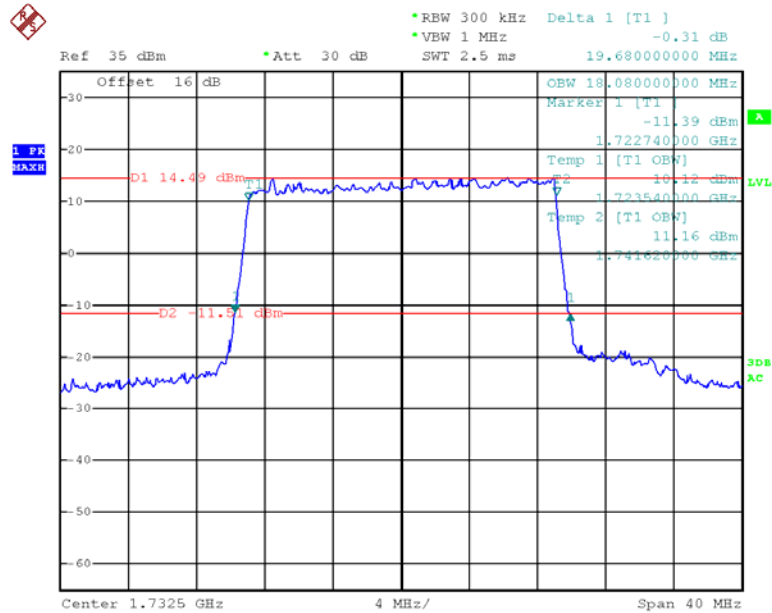16-QAM, Band 4-20M


Date: 14.OCT.2015 23:45:31

QPSK, Band 7-5M

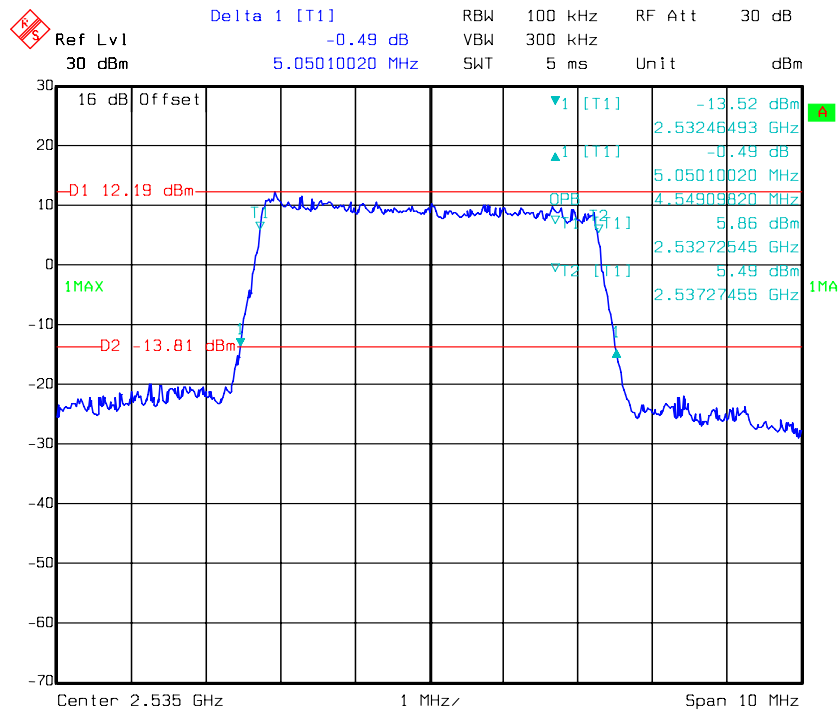


Date: 20.OCT.2015 22:13:58

QPSK, Band 7-10M

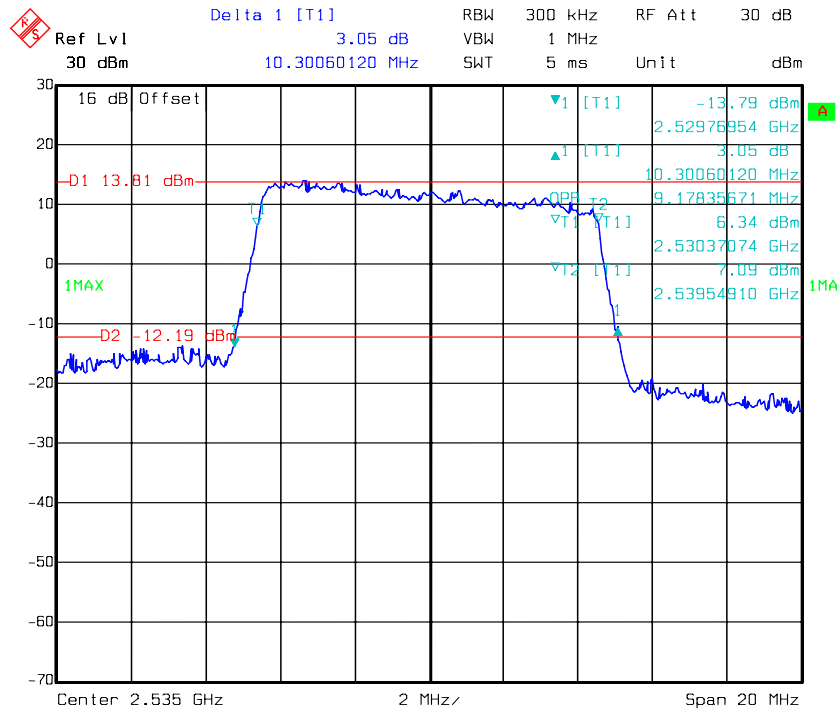




Date: 20.OCT.2015 22:17:23



QPSK, Band 7-15M

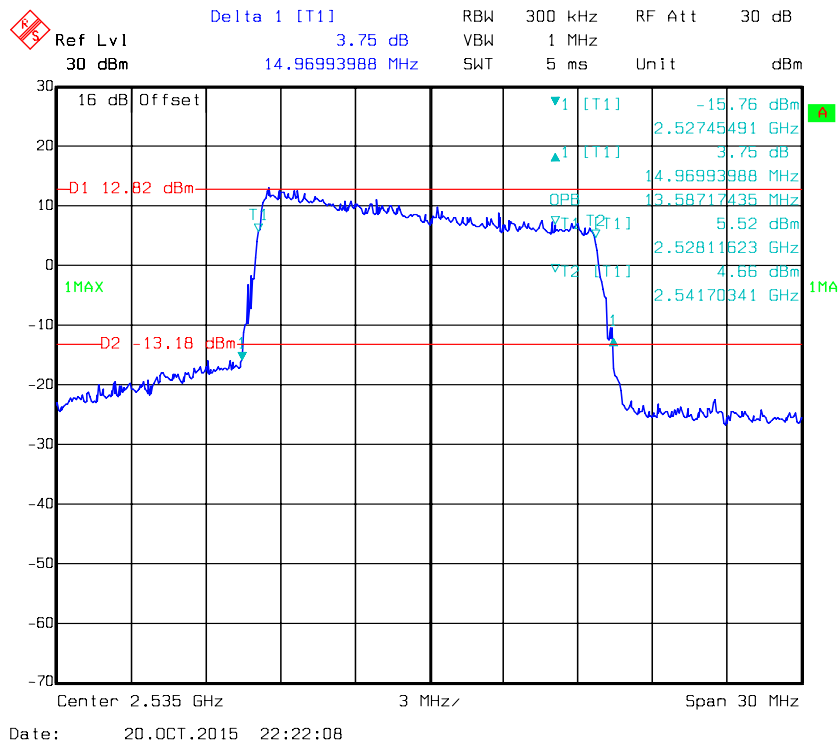

QPSK, Band 7-20M

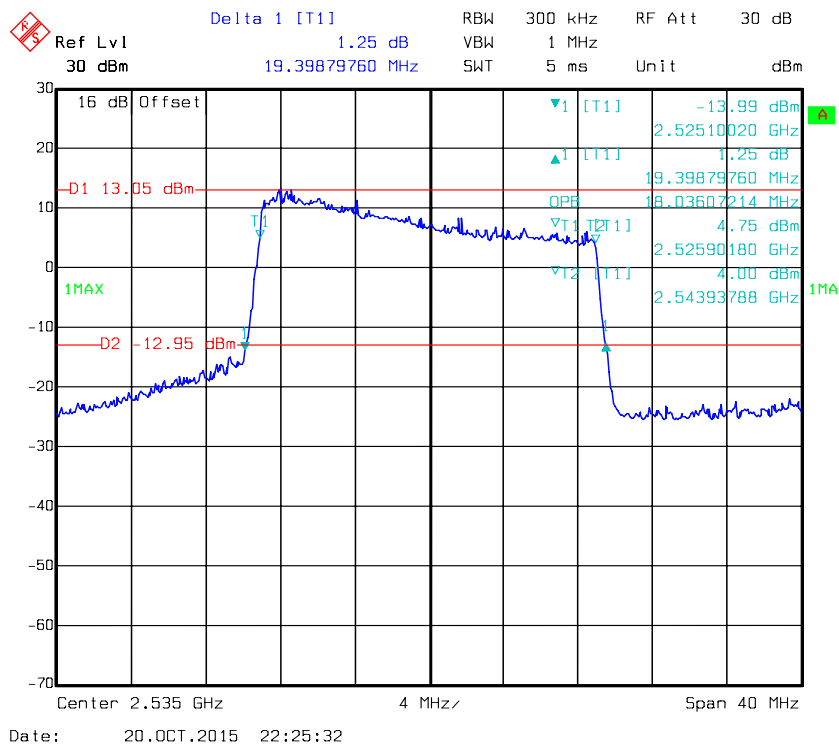

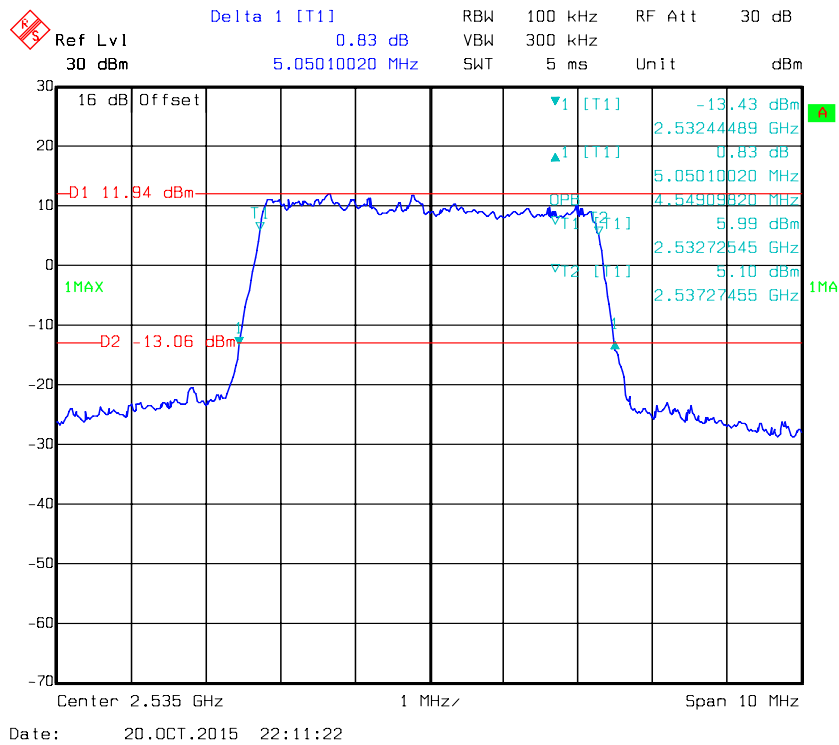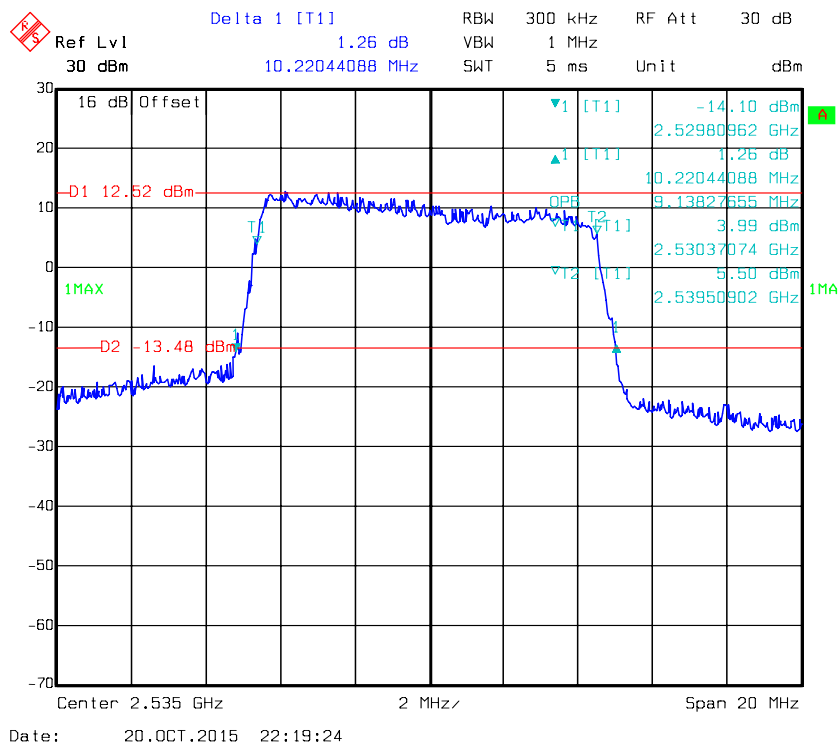16-QAM, Band 7-5M**16-QAM, Band 7-10M**

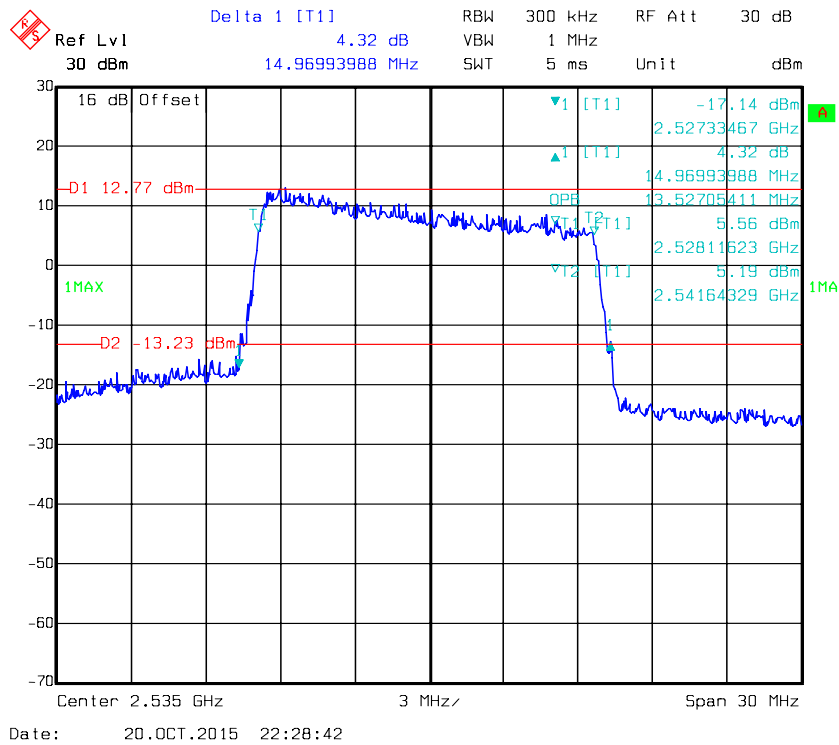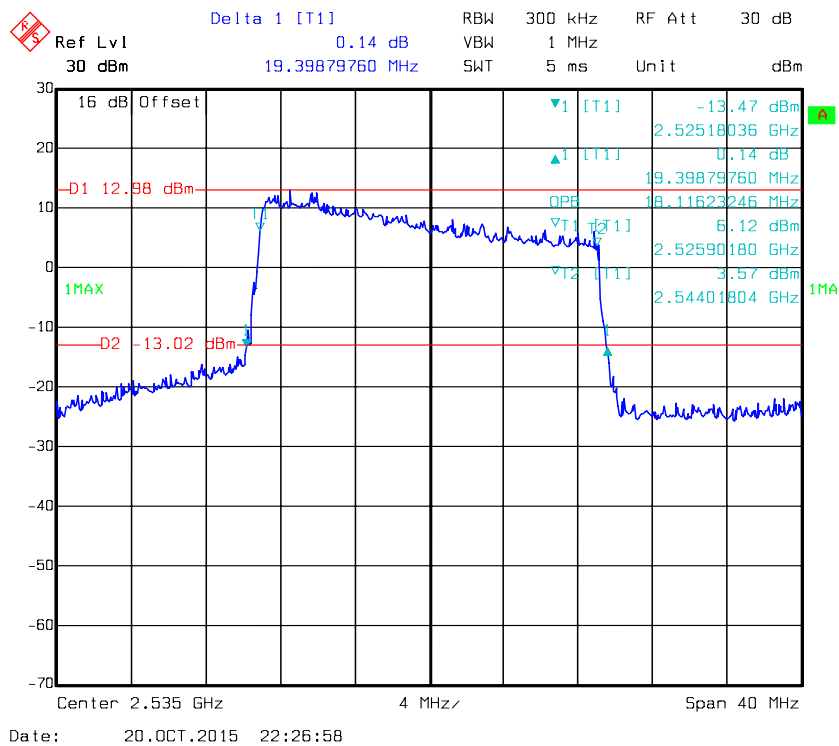16-QAM, Band 7-15M**16-QAM, Band 7-20M**

FCC §2.1051, §22.917(a) & §24.238(a) & §27.53- SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a), §24.238(a) and §27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

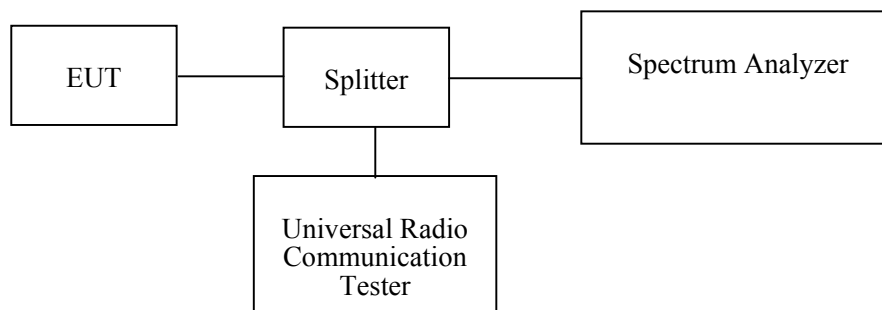

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
R&S	Universal Radio Communication Tester	CMU200	109038	2015-05-09	2016-05-09
R&S	Wideband Radio Communication Tester	CMW500	106891	2014-12-19	2015-12-19

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data



Environmental Conditions

Temperature:	26.6~27.2 °C
Relative Humidity:	53~56 %
ATM Pressure:	100.0~100.6 kPa


The testing was performed by Dean Liu from 201510-08 to 2015-10-20.

Please refer to the following plots.


GSM850_Middle Channel

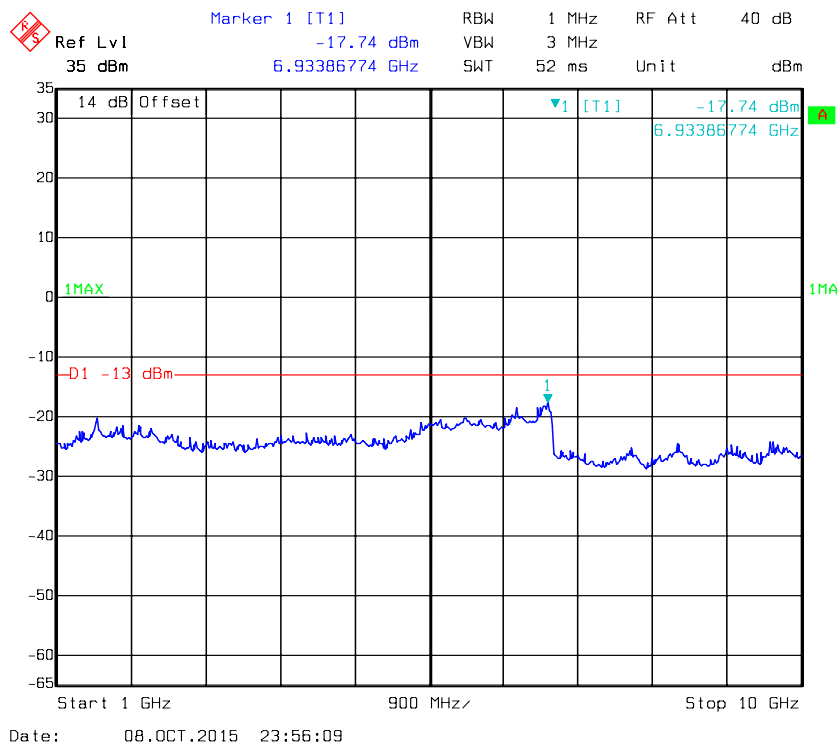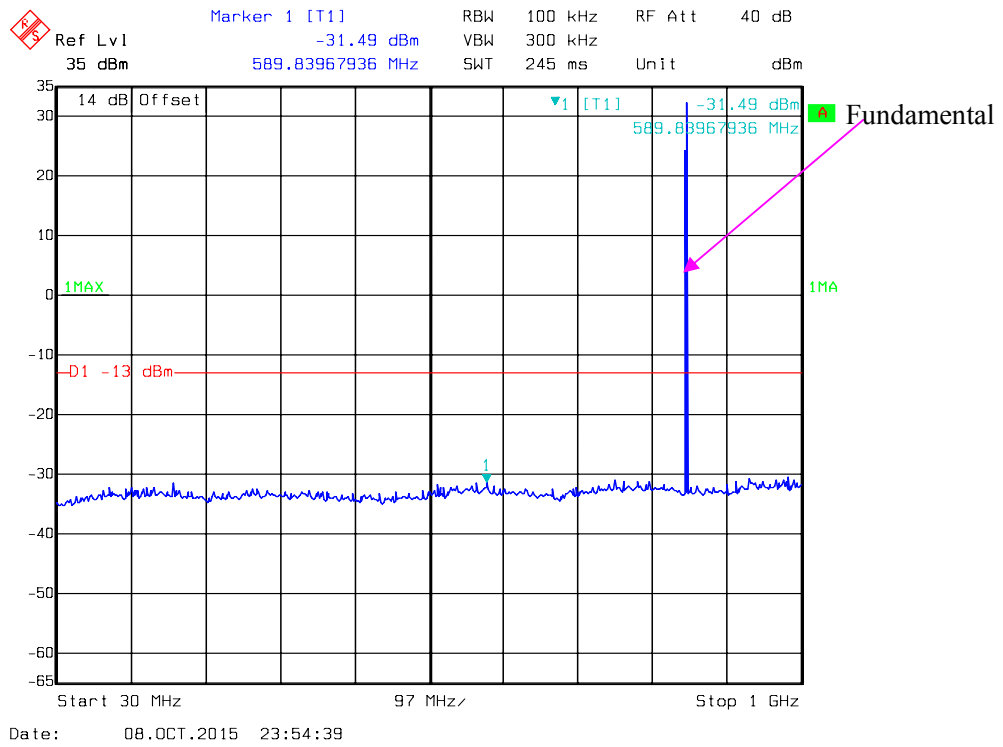



PCS 1900_ Middle Channel

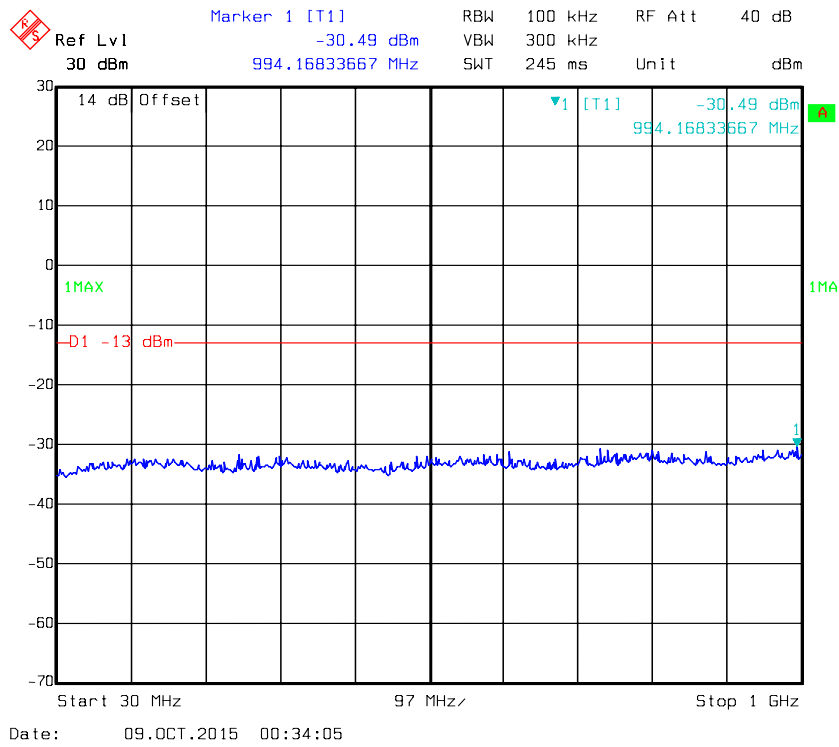


Fundamental

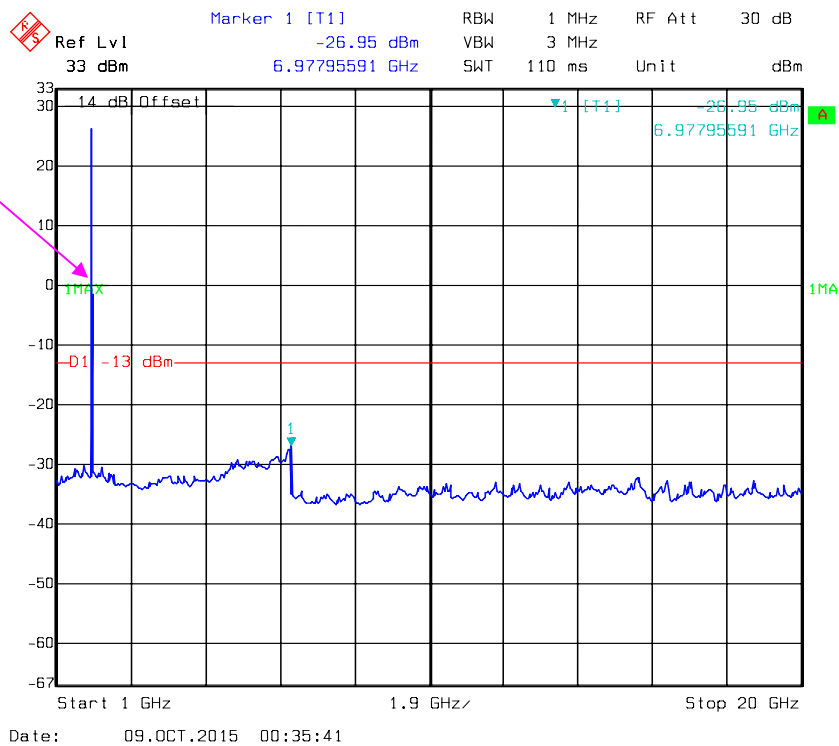


EDGE850_Middle Channel

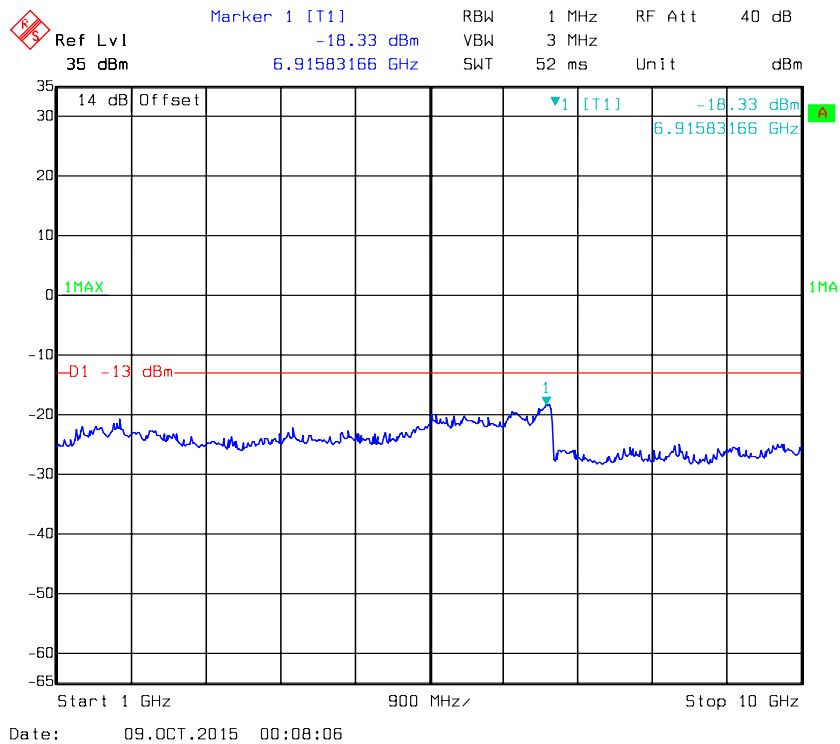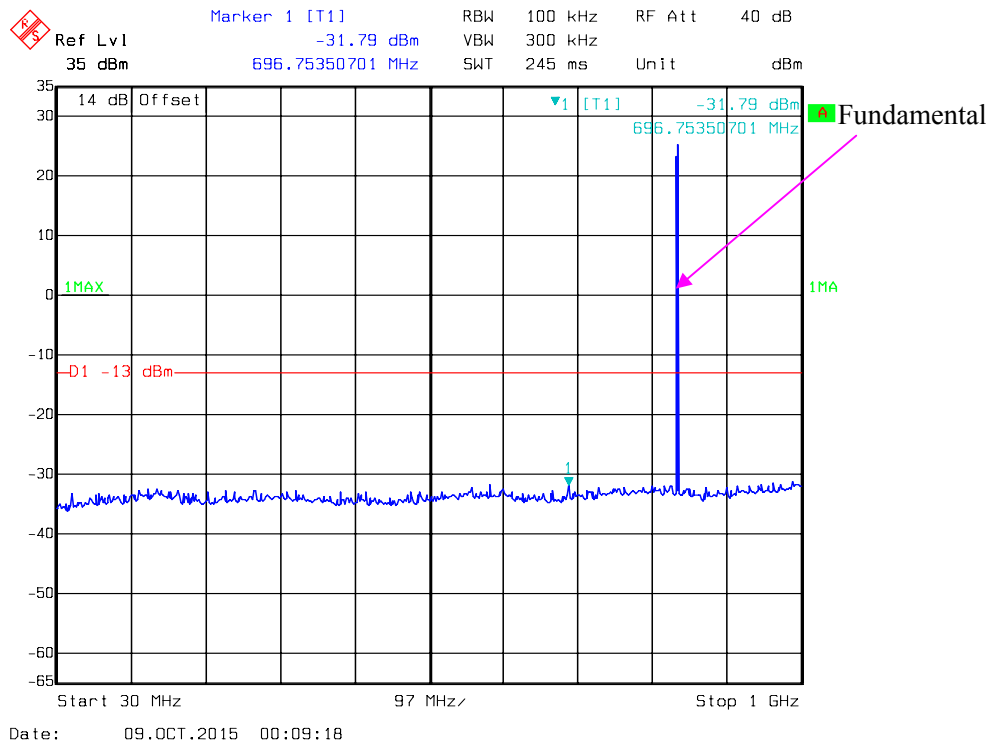


EDGE1900_Middle Channel

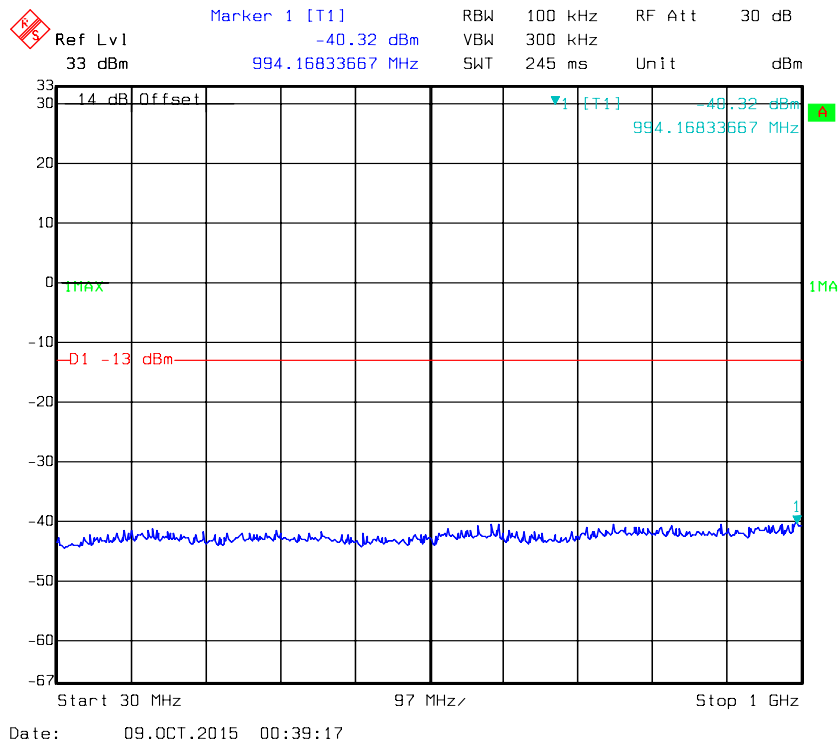


Fundamental

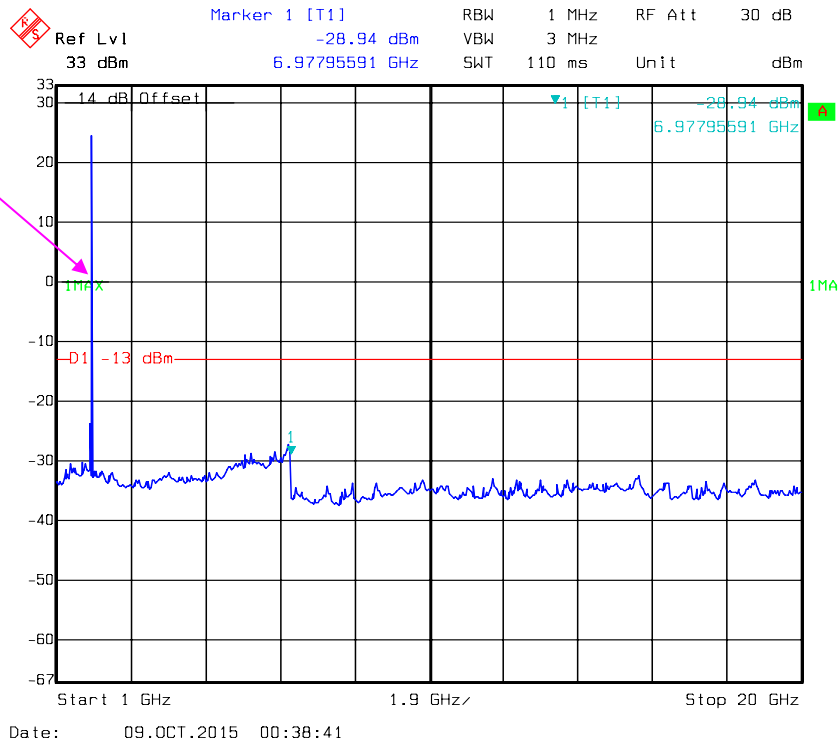


REL99 Band II_Middle Channel

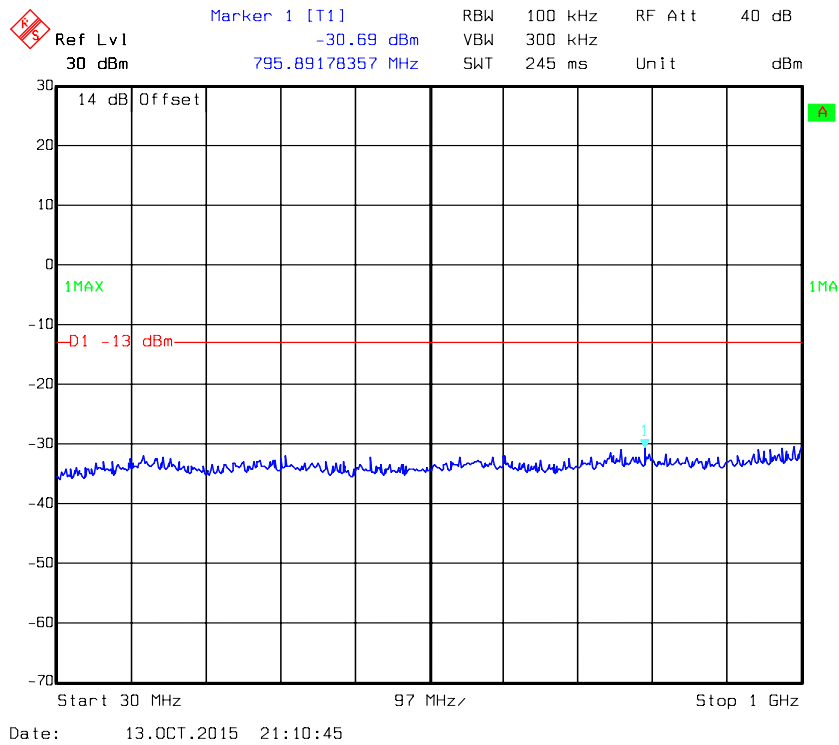


Fundamental

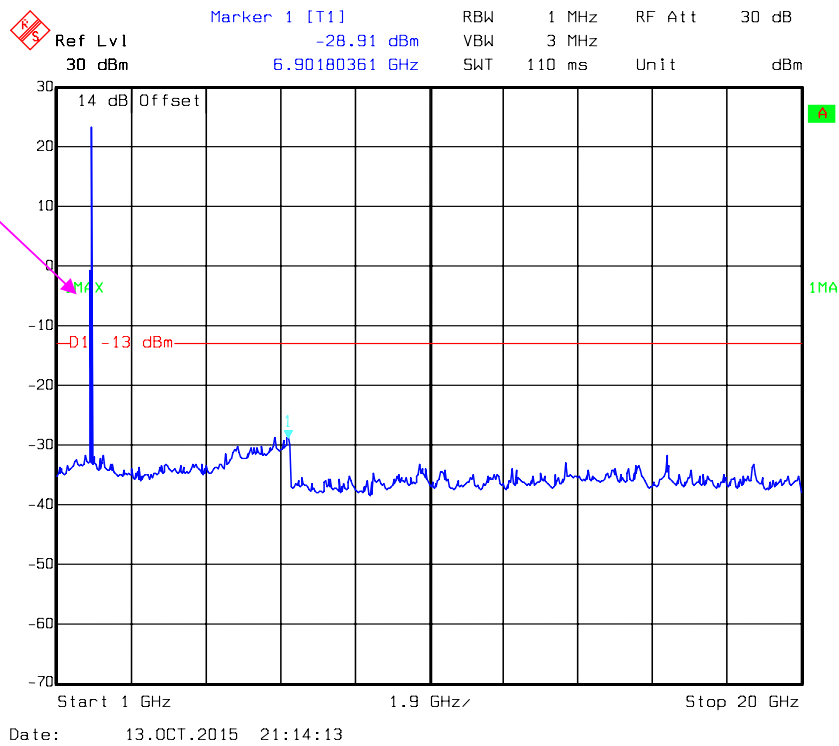


HSDPA Band II_Middle Channel

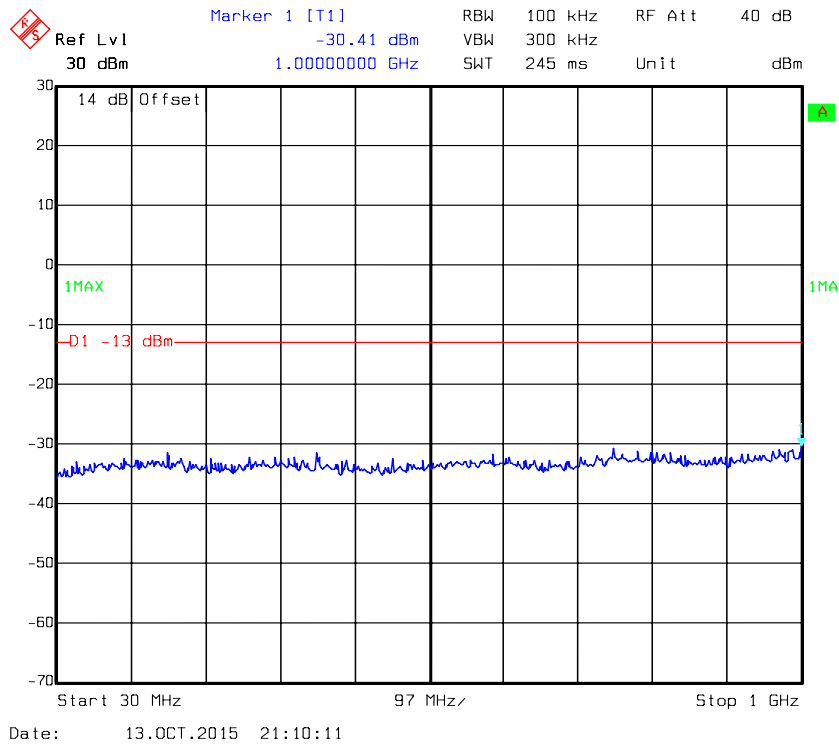


Fundamental

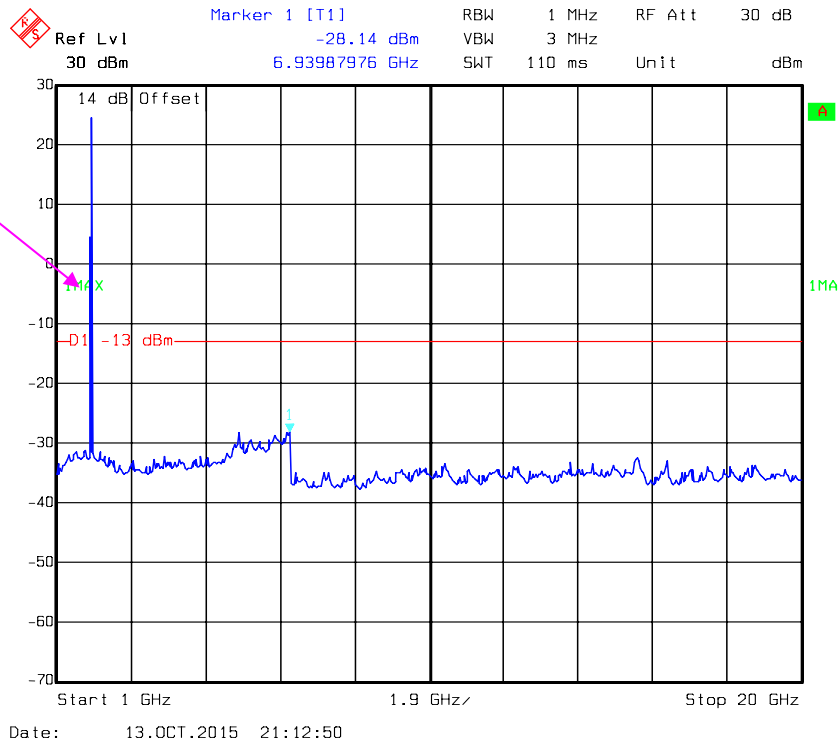



HSUPA Band II _ Middle Channel

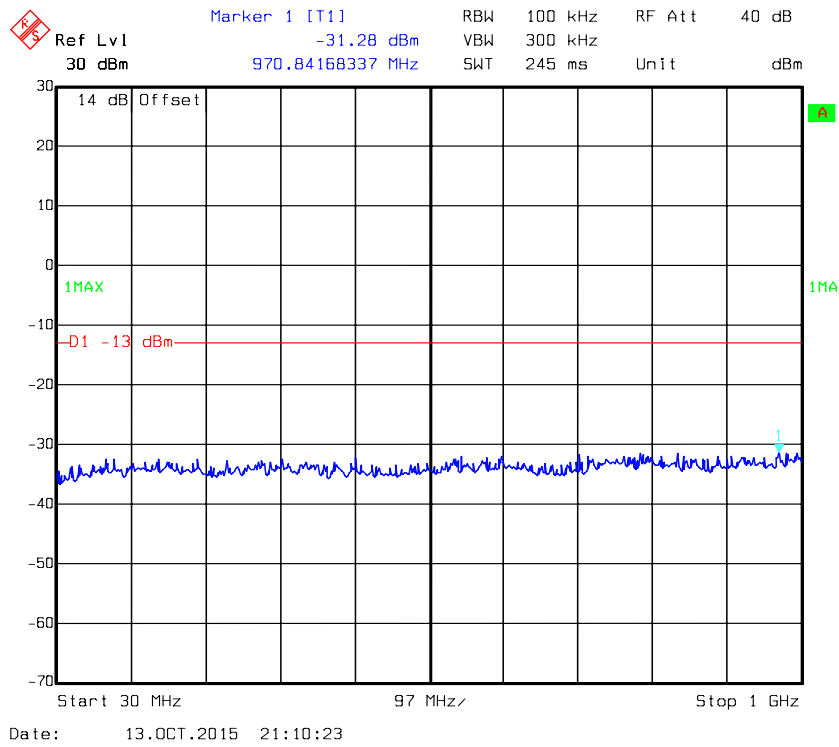



Fundamental

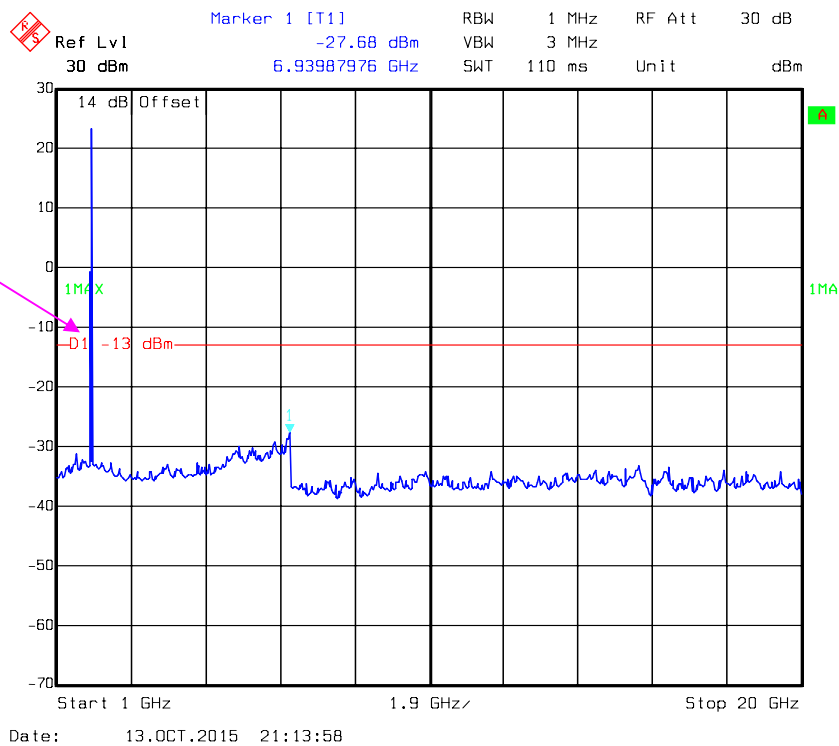



REL99 Band V_ Middle Channel

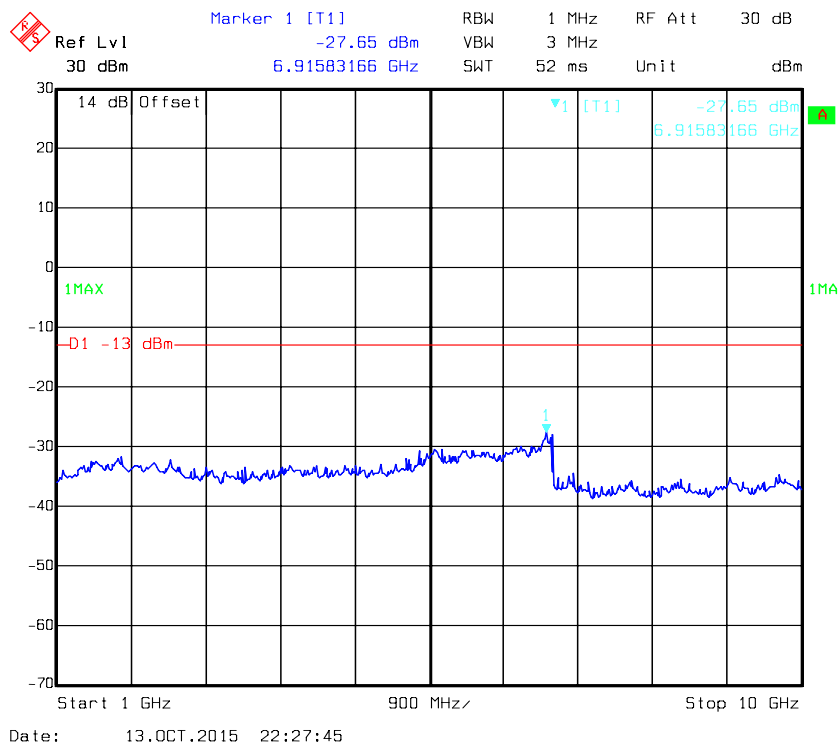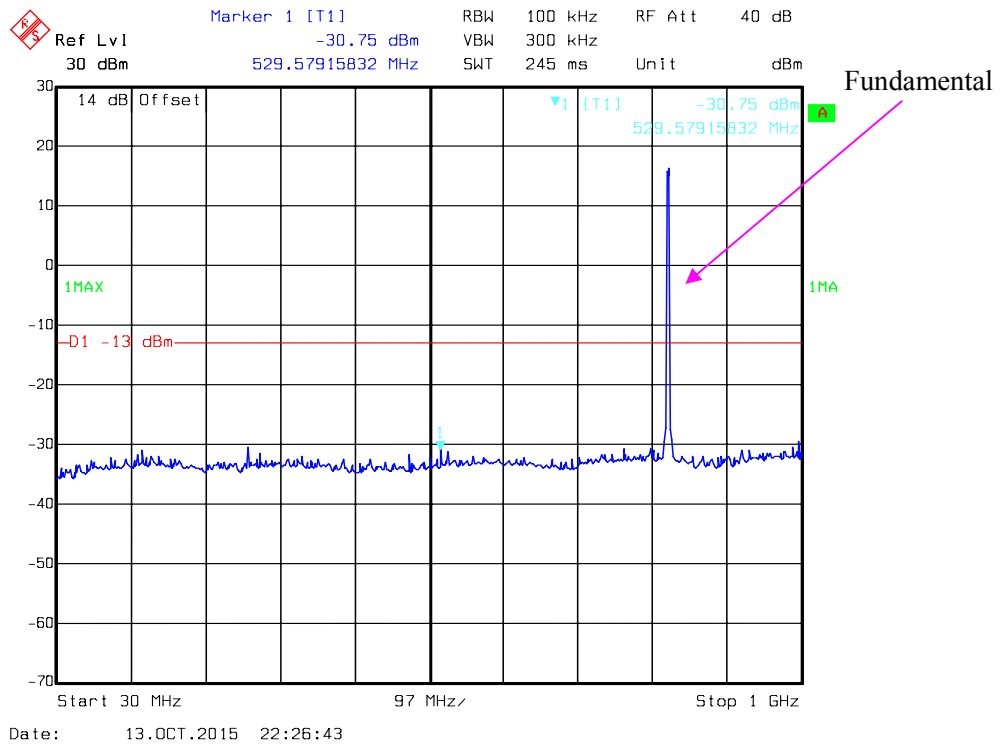

HSDPA Band V_ Middle Channel

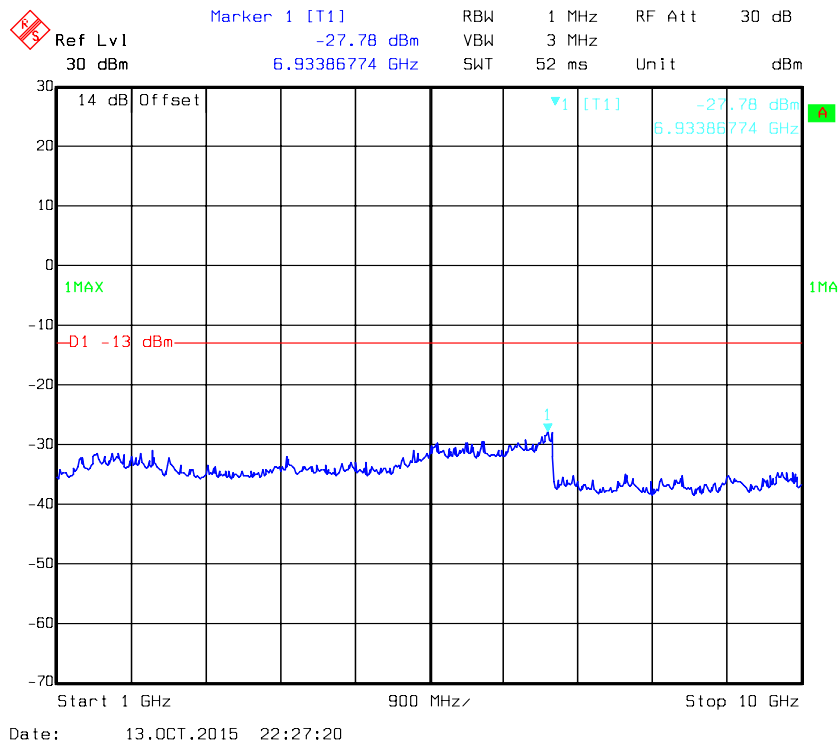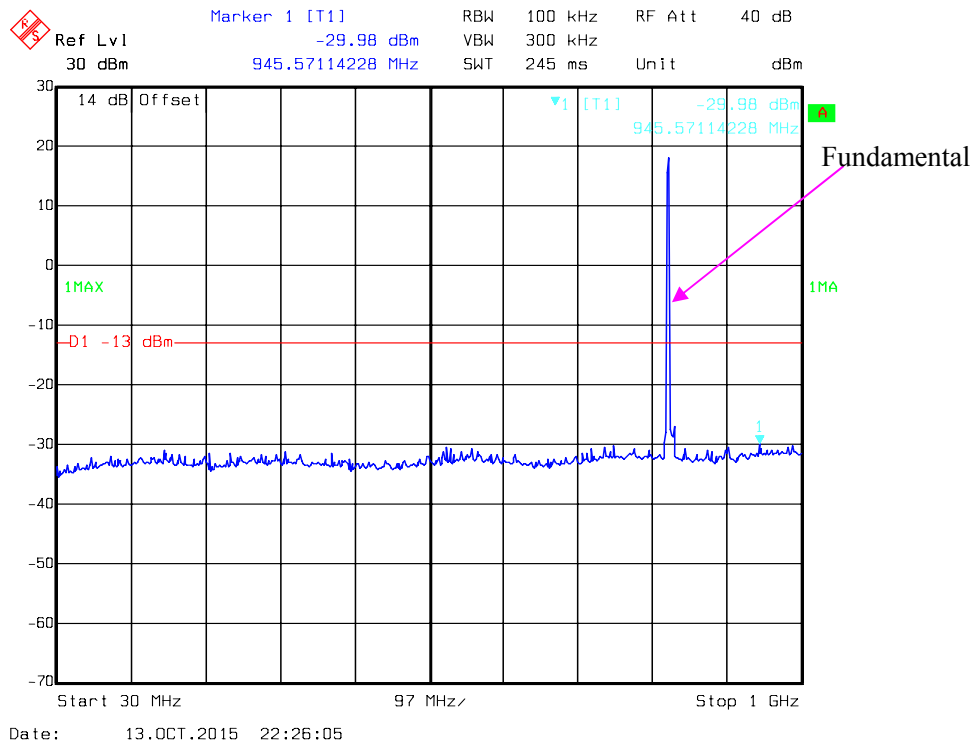


HSUPA Band V_ Middle Channel

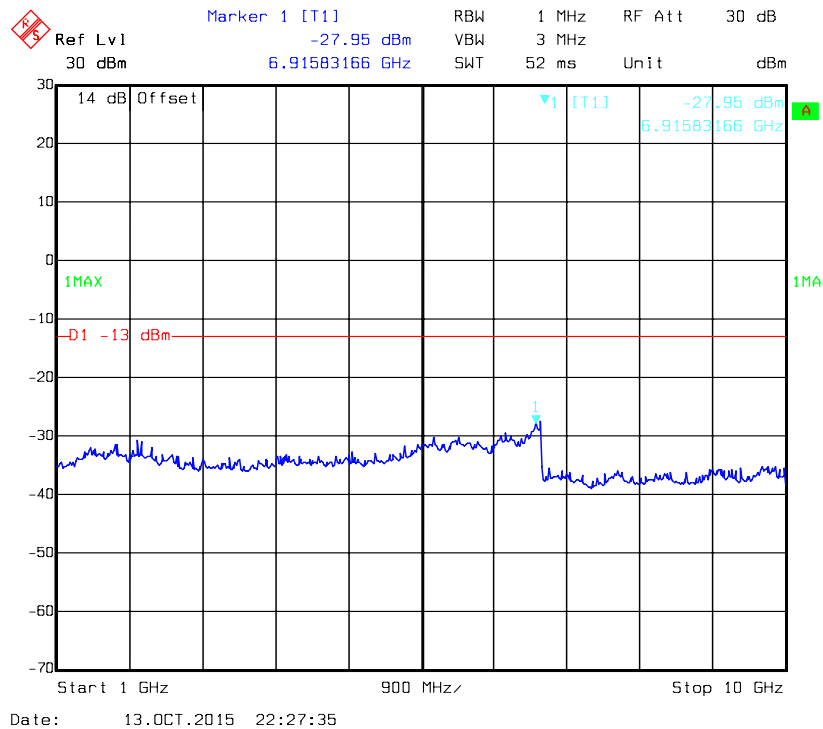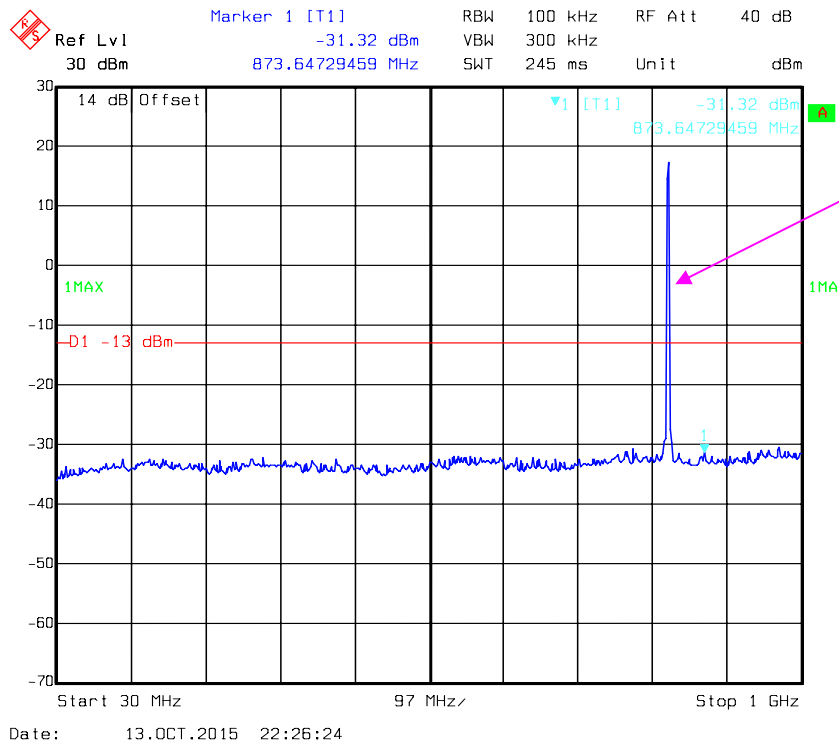


LTE Band 4:


QPSK, Band 4-1.4M _ Middle Channel

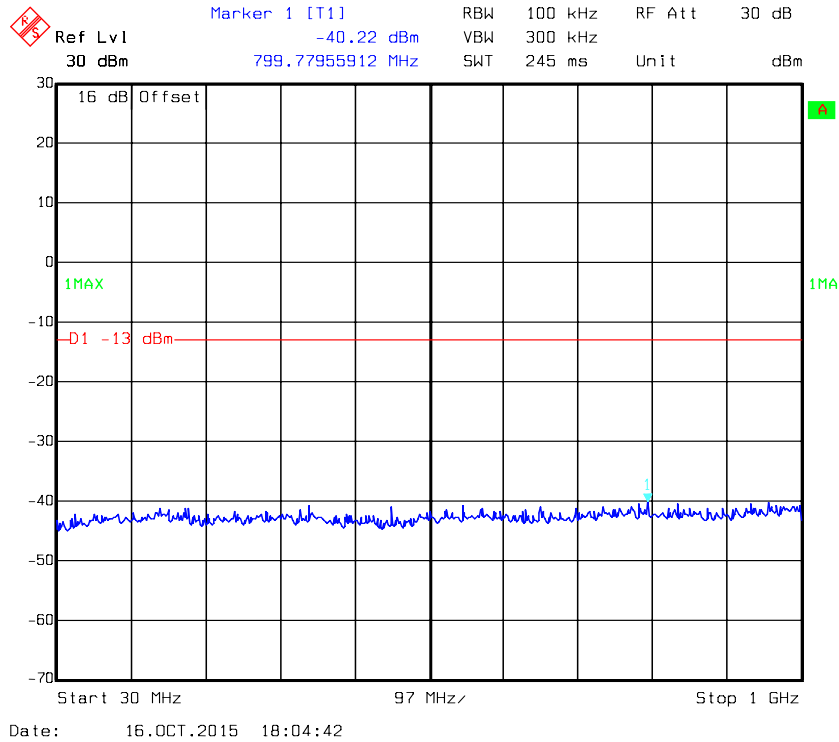


Fundamental

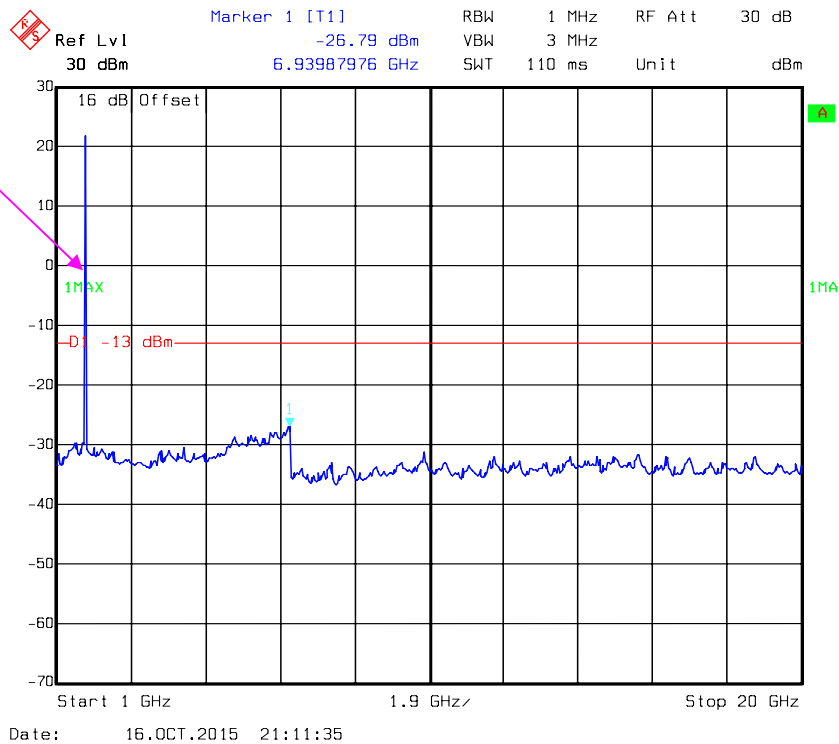


QPSK, Band 4-3M _ Middle Channel

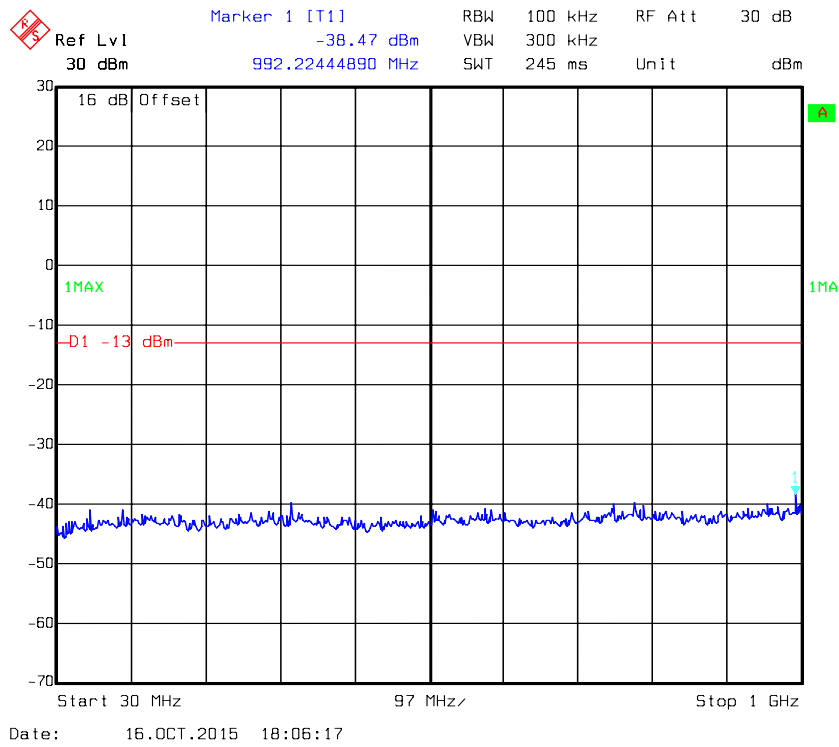


Fundamental

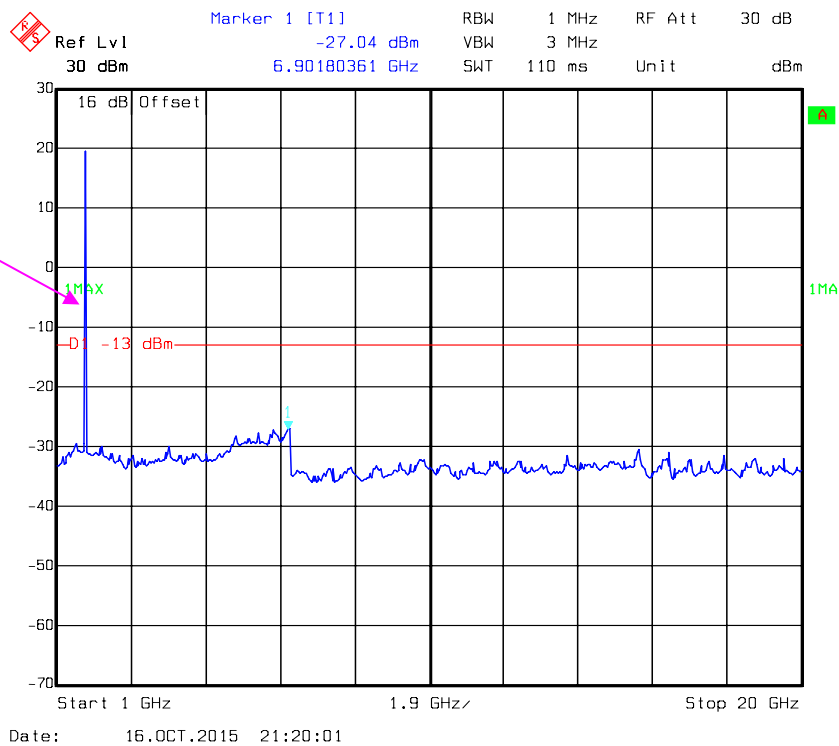


QPSK, Band 4-5M _ Middle Channel

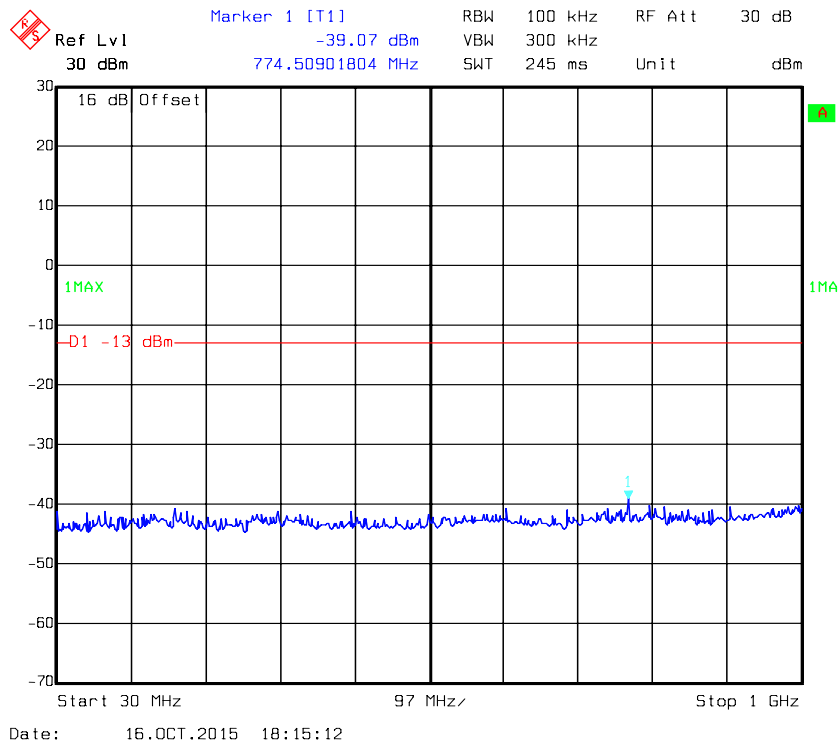


Fundamental

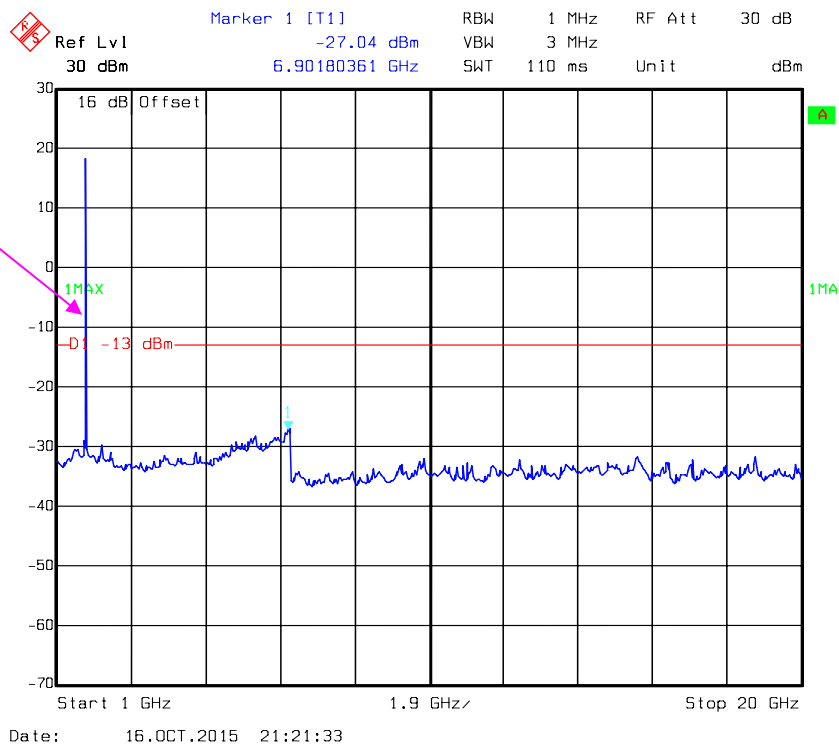



QPSK, Band 4-10M _ Middle Channel

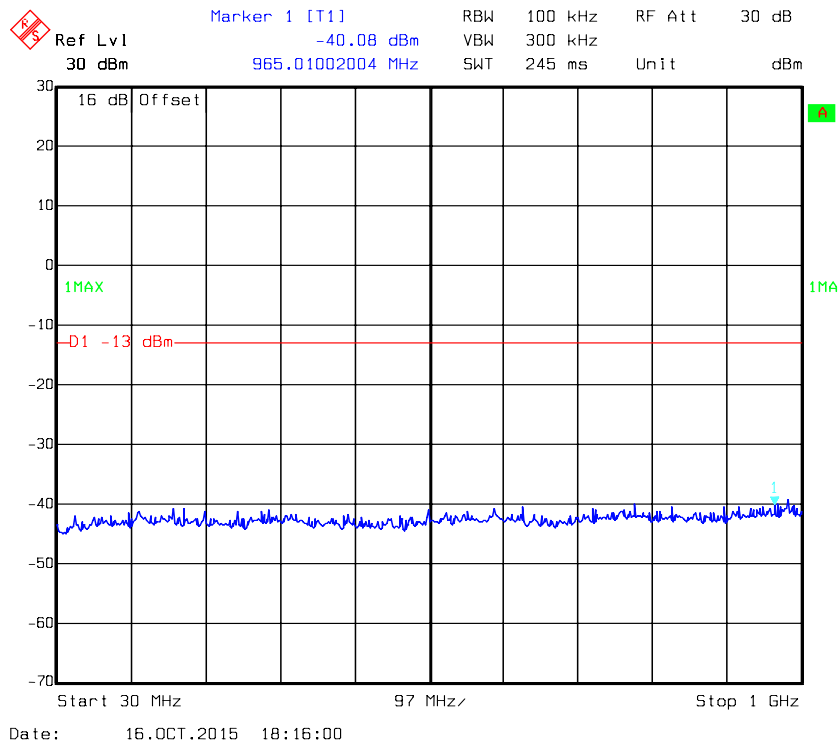


Fundamental

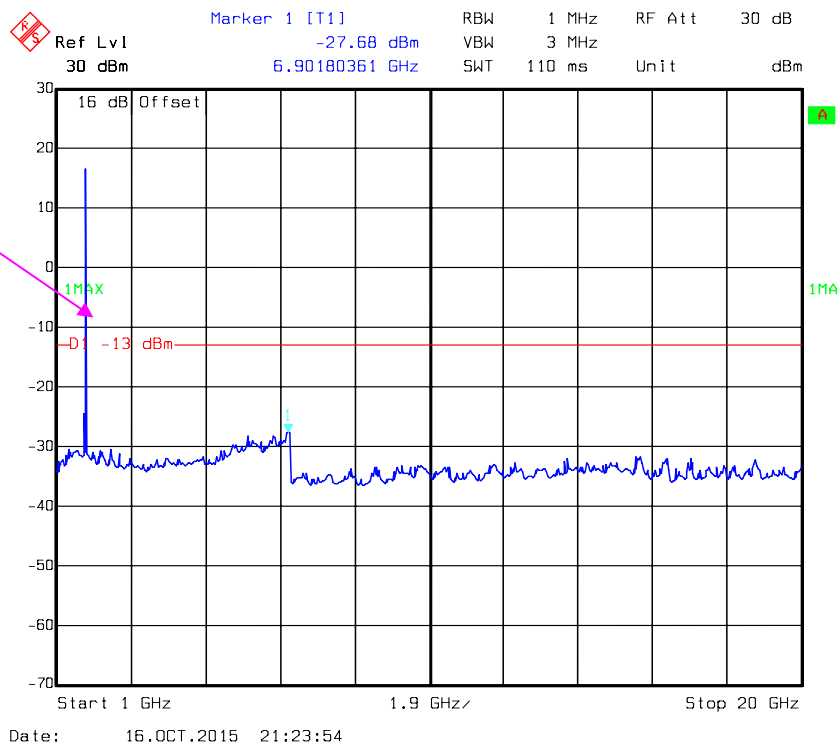


QPSK, Band 4-15M _ Middle Channel

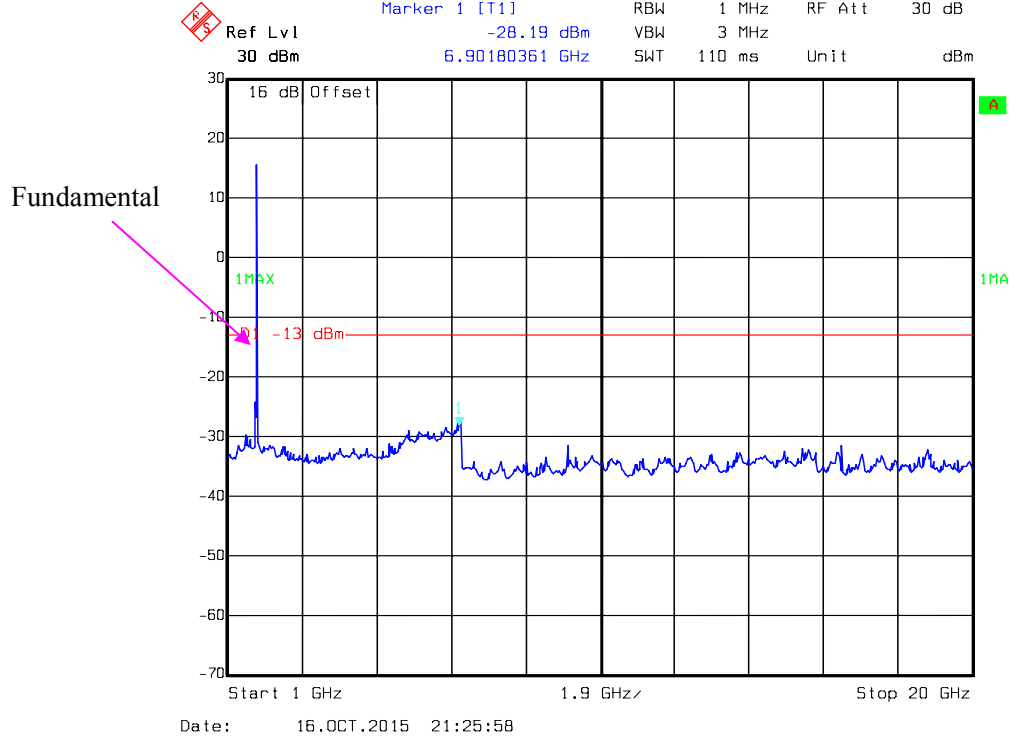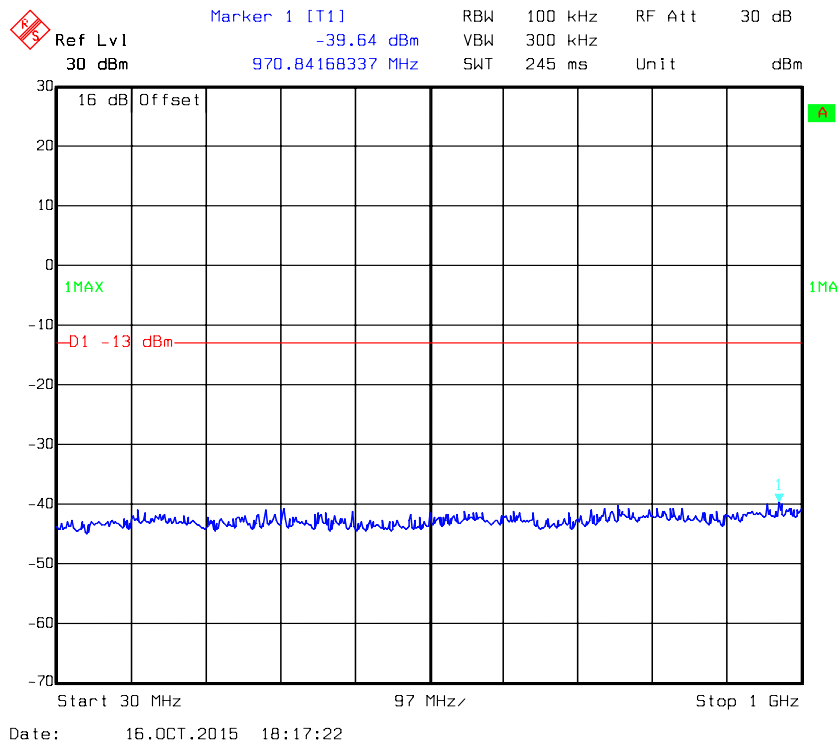


QPSK, Band 4-20M _ Middle Channel

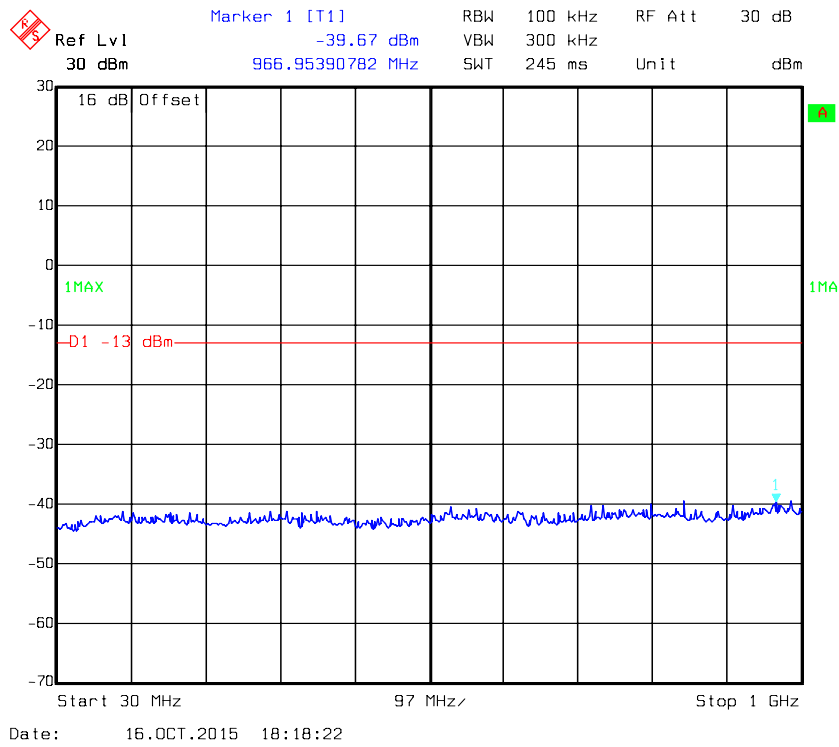


Fundamental

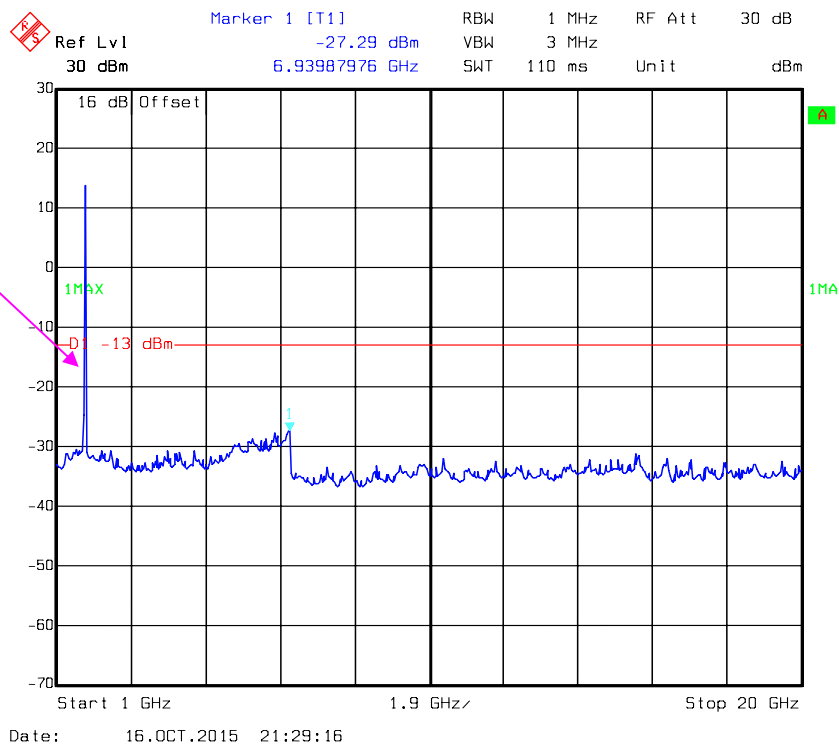


16-QAM, Band 4-1.4M _ Middle Channel

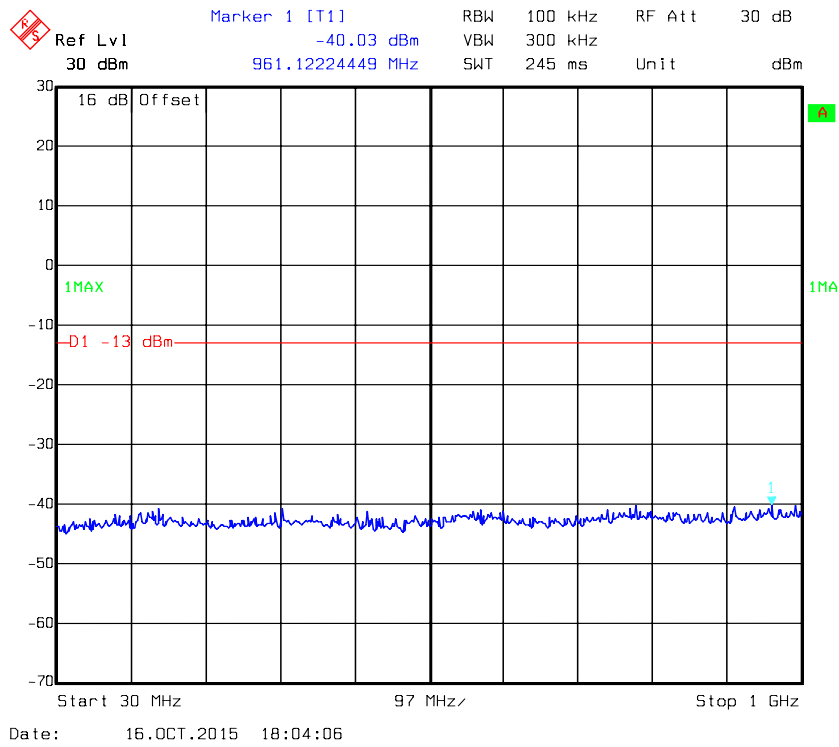


Fundamental

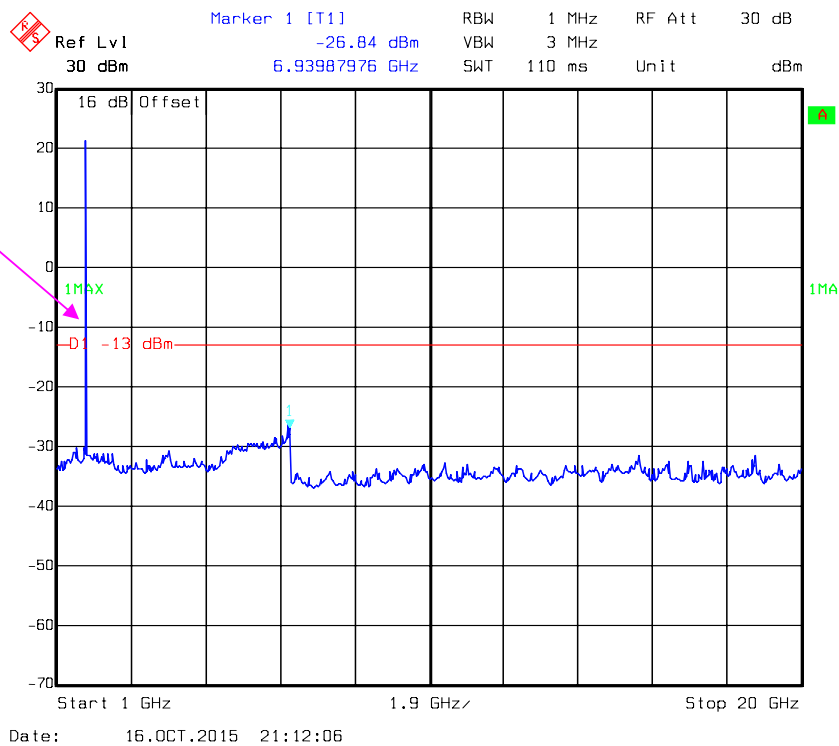



16-QAM, Band 4-3M _ Middle Channel

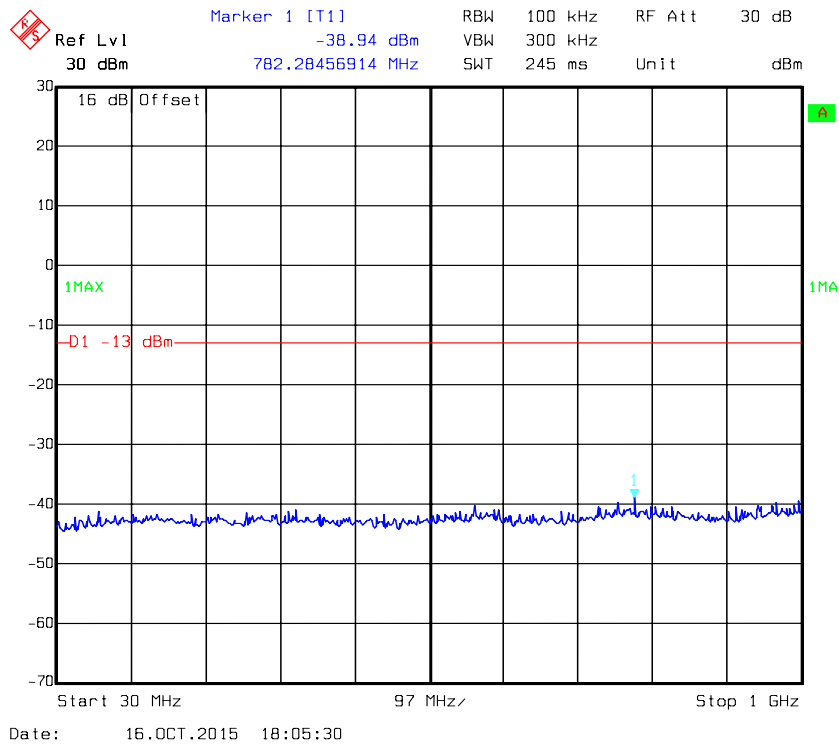


Fundamental

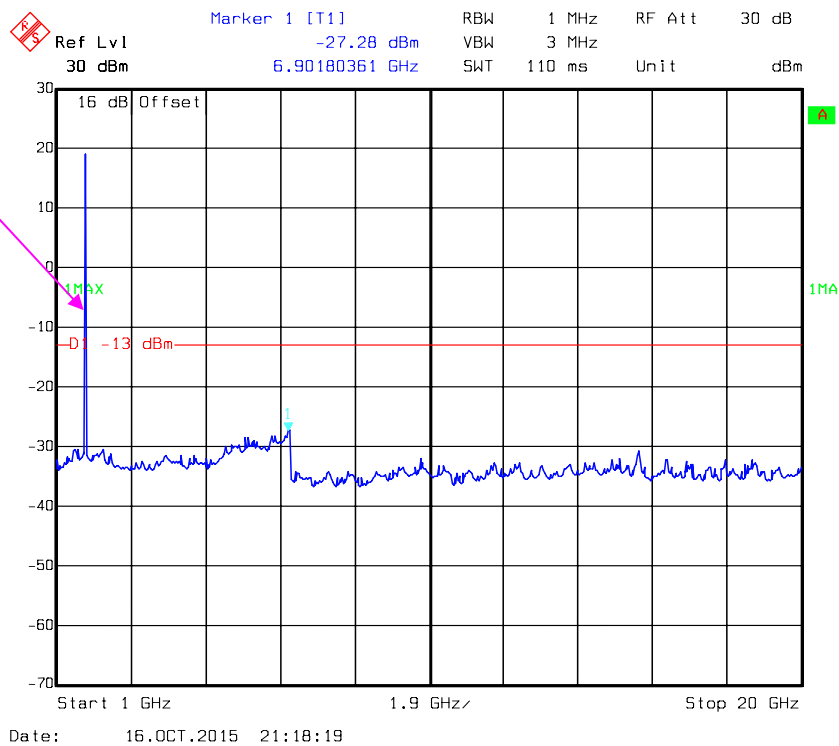


16-QAM, Band 4-5M _ Middle Channel

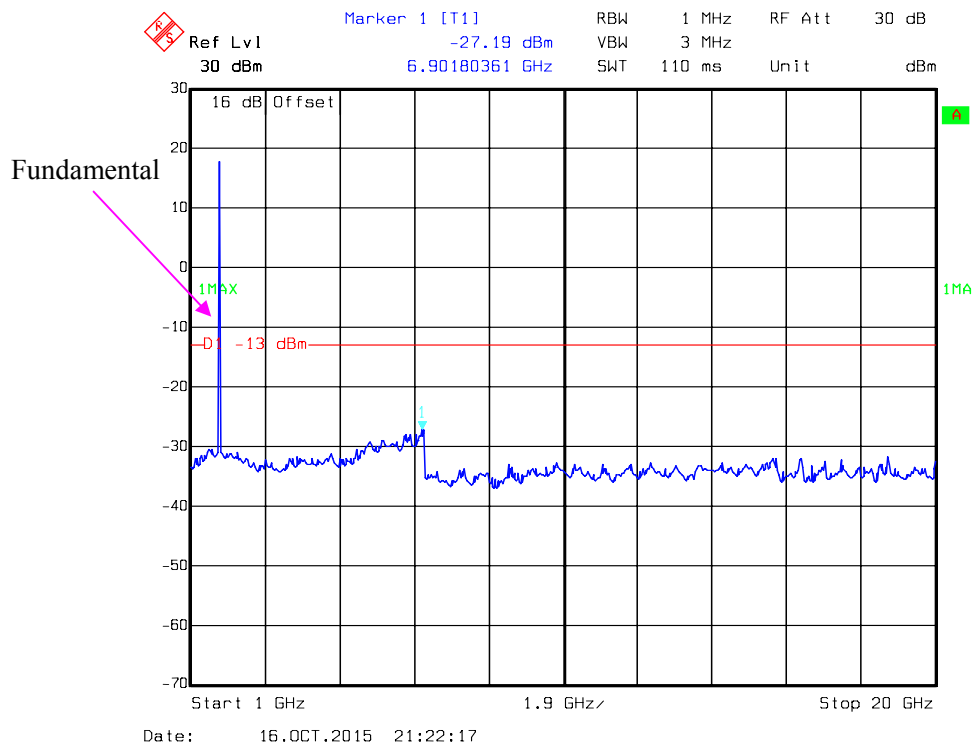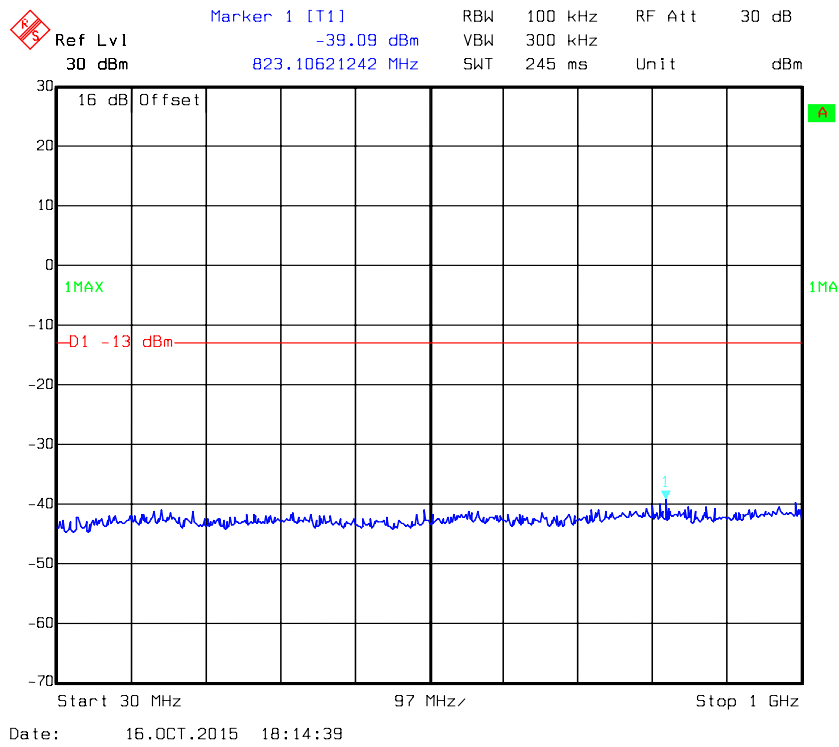


16-QAM, Band 4-10M _ Middle Channel

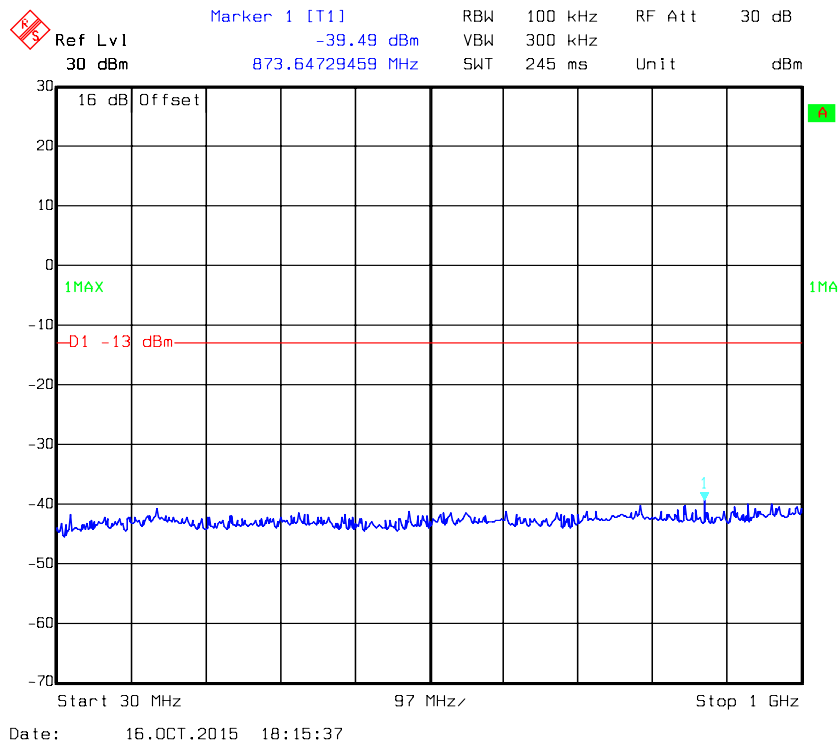


Fundamental

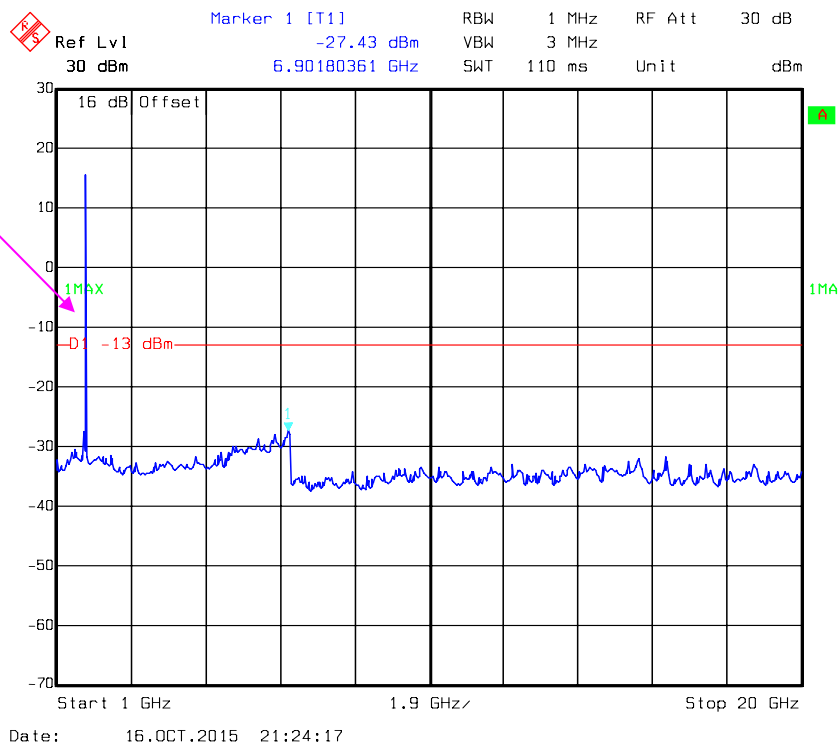



16-QAM, Band 4-15M _ Middle Channel

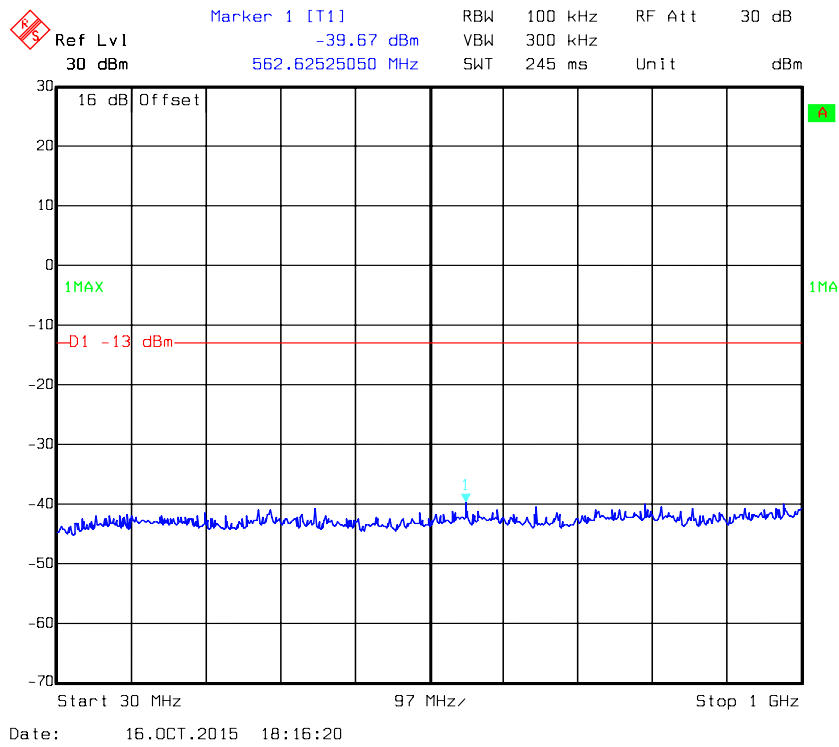

Fundamental

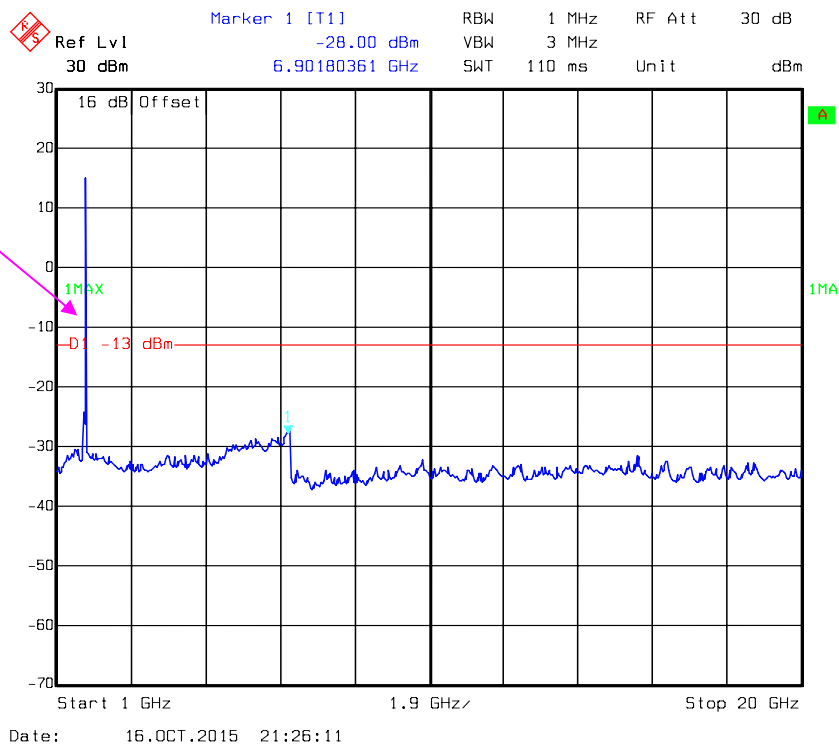


16-QAM, Band 4-20M _ Middle Channel

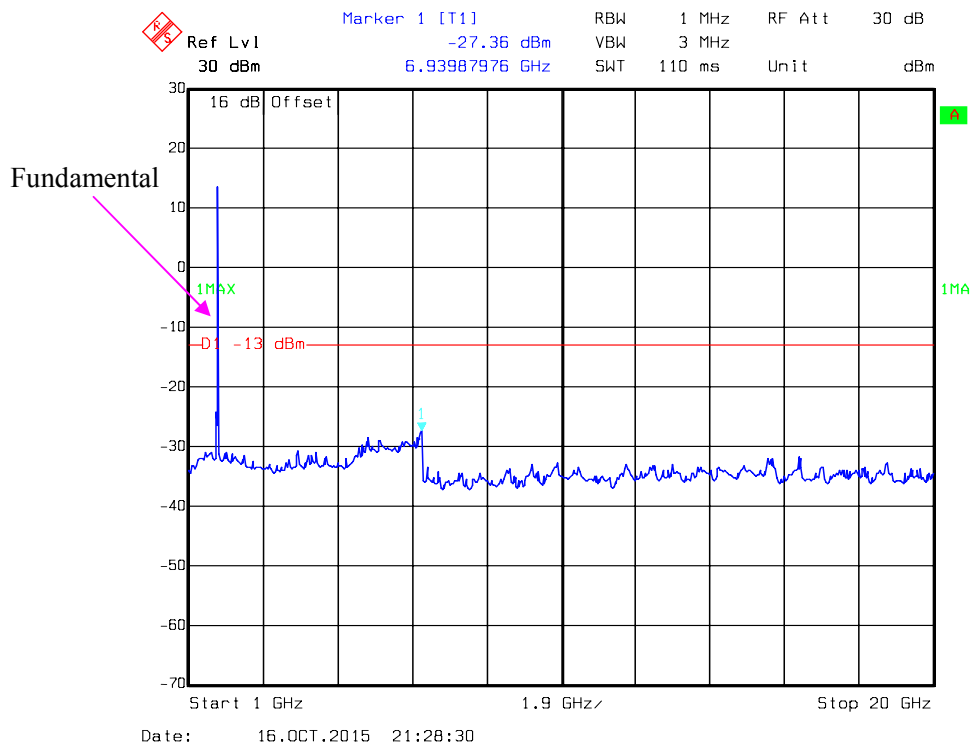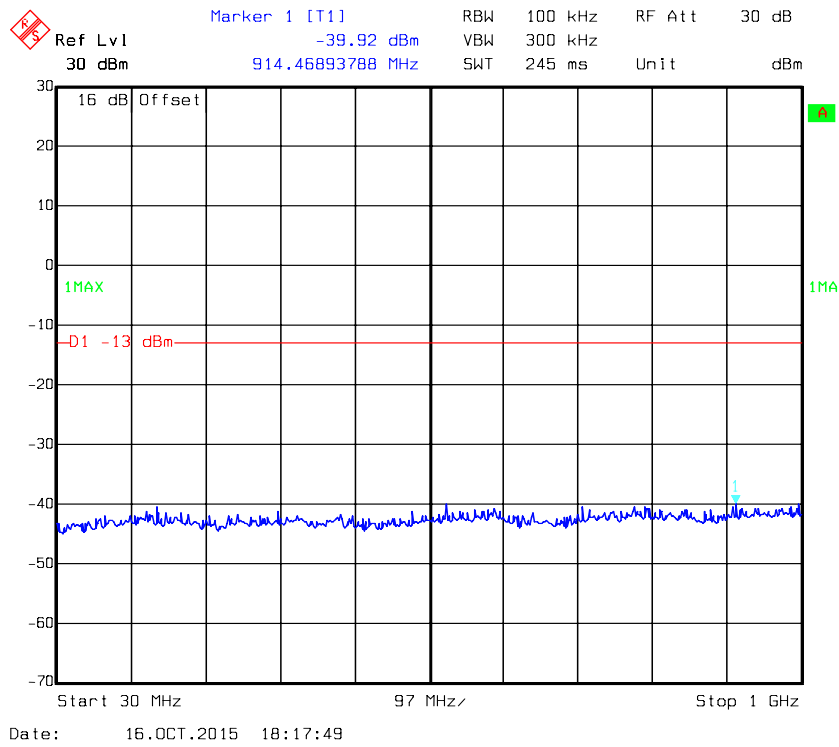


LTE Band 7:


QPSK, Band 7-5M _ Middle Channel

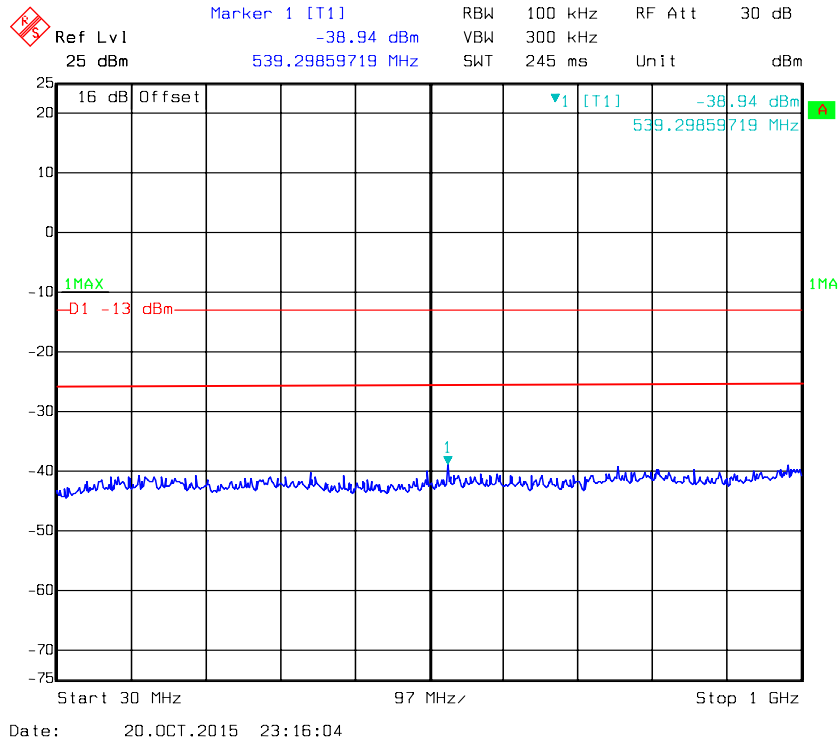


Fundamental

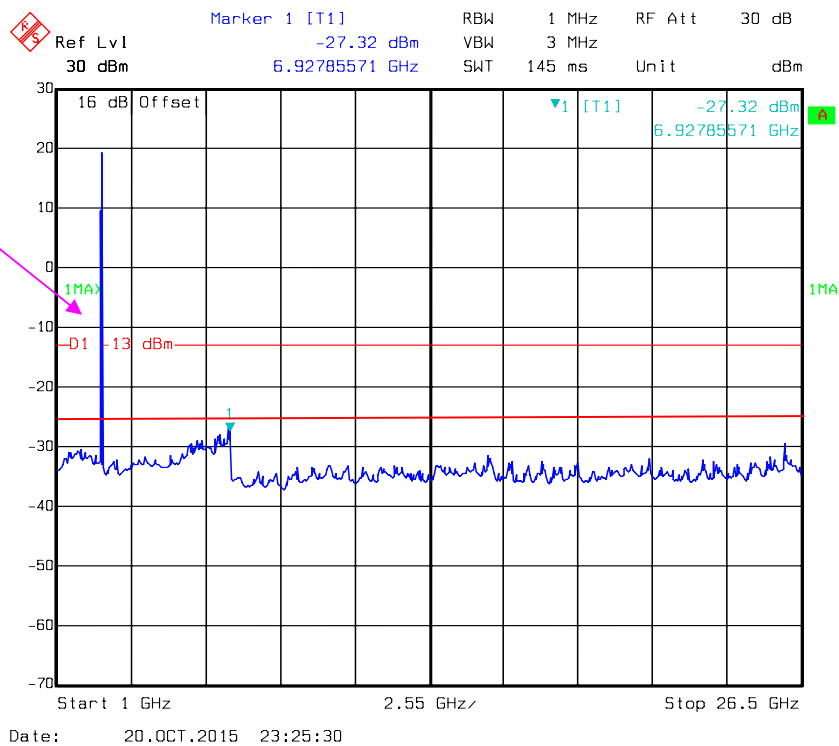


QPSK, Band 7-10M _ Middle Channel

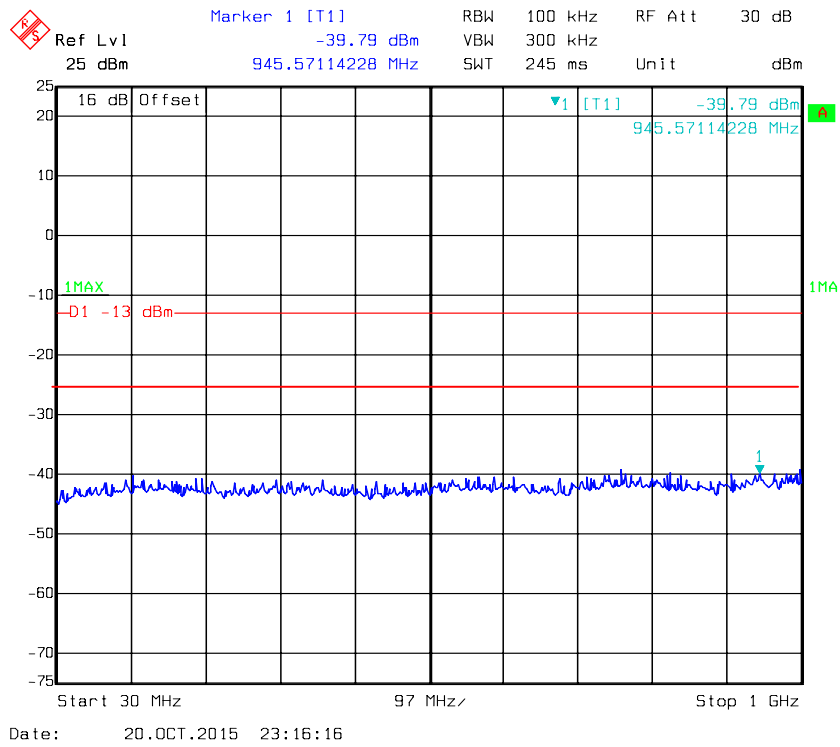


Fundamental

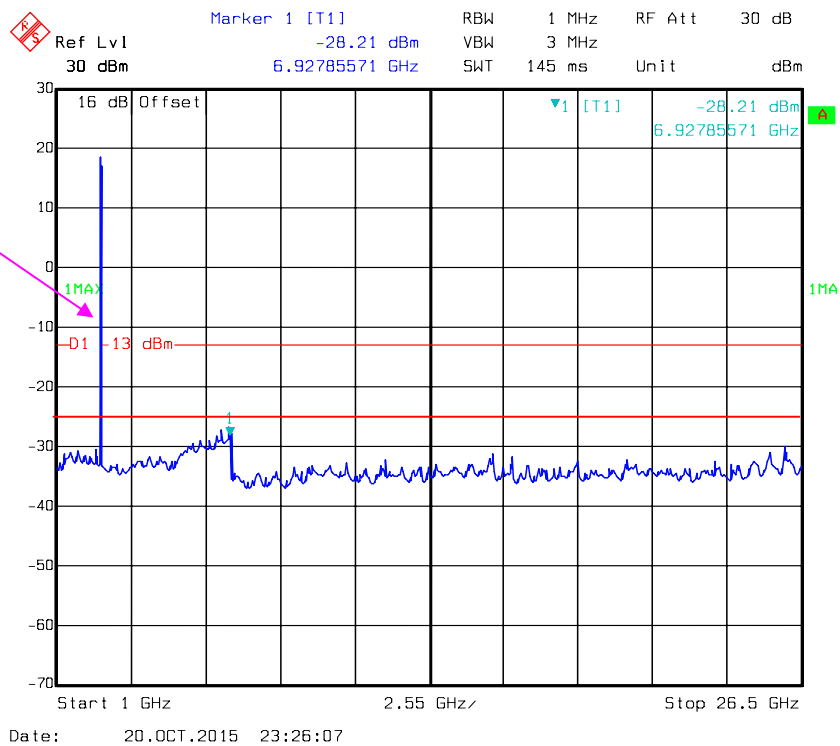


QPSK, Band 7-15M _ Middle Channel

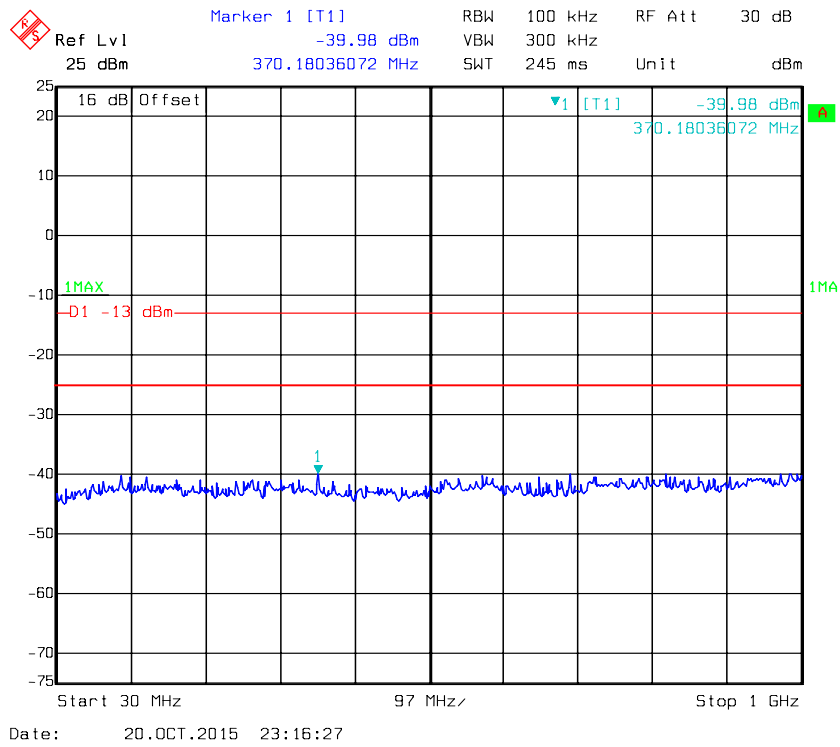


Fundamental

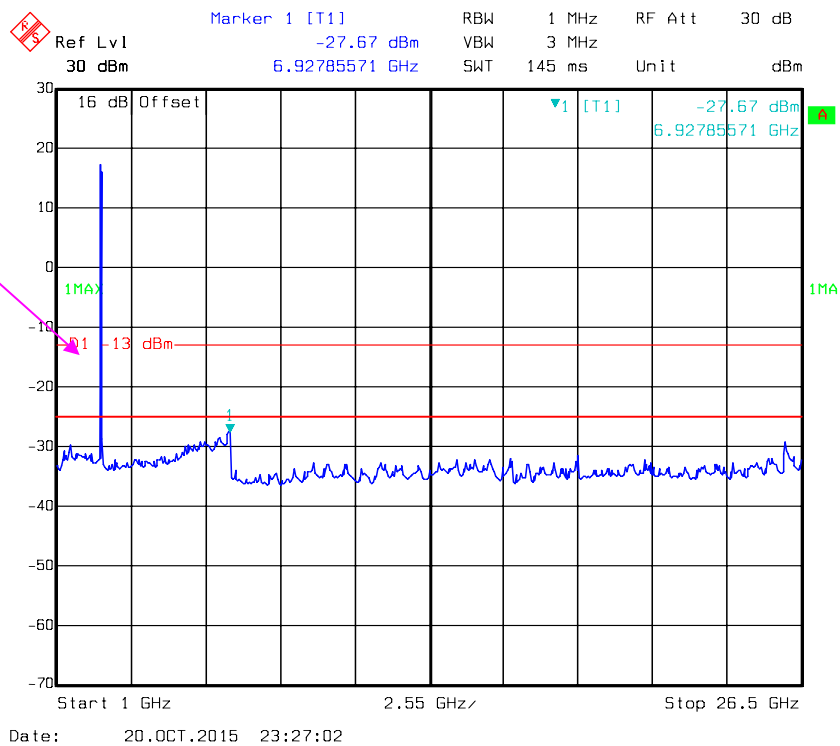



QPSK, Band 7-20M _ Middle Channel

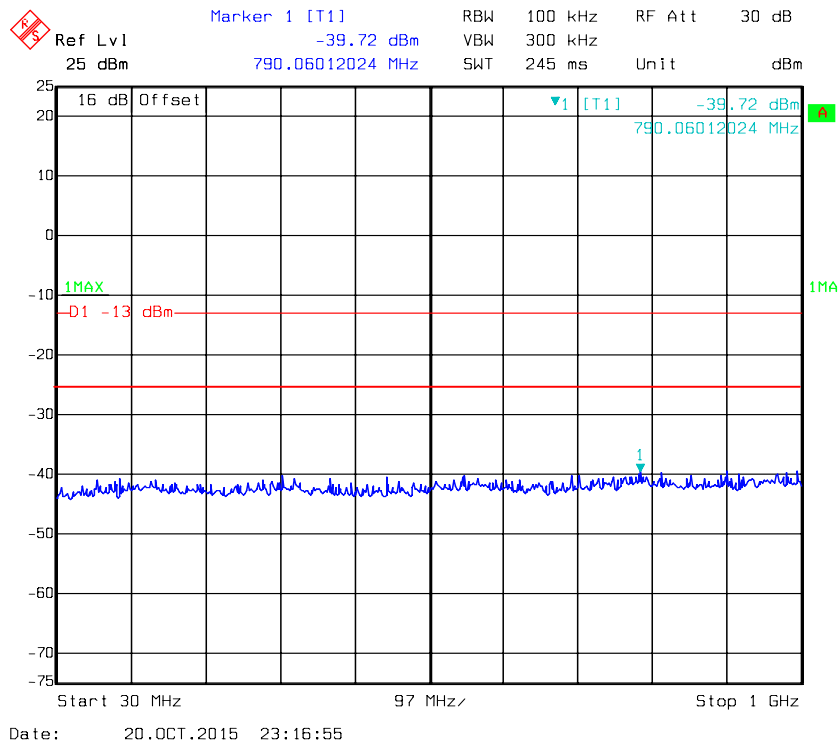


Fundamental

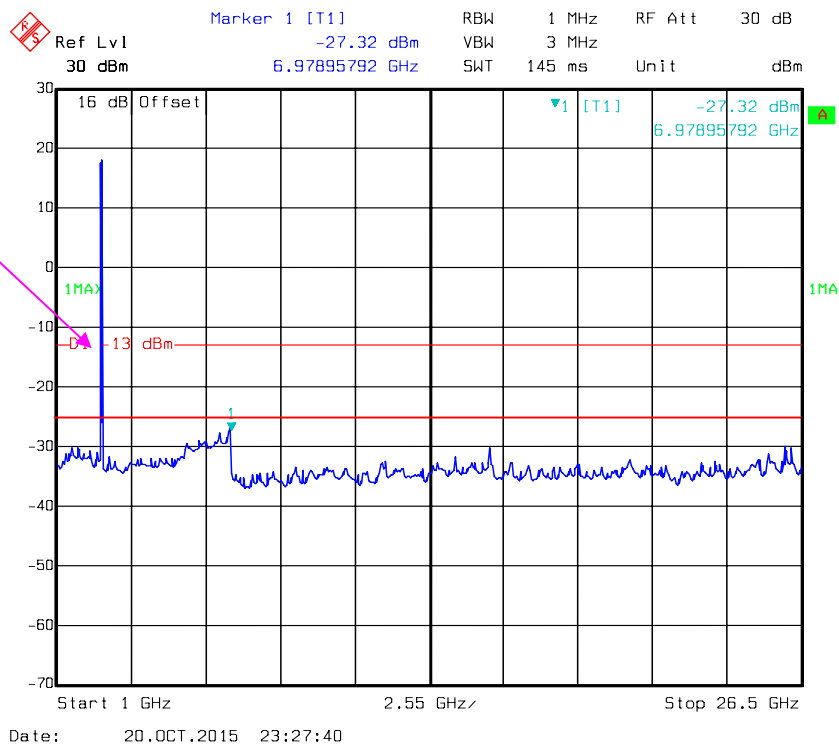


16-QAM, Band 7-5M _ Middle Channel

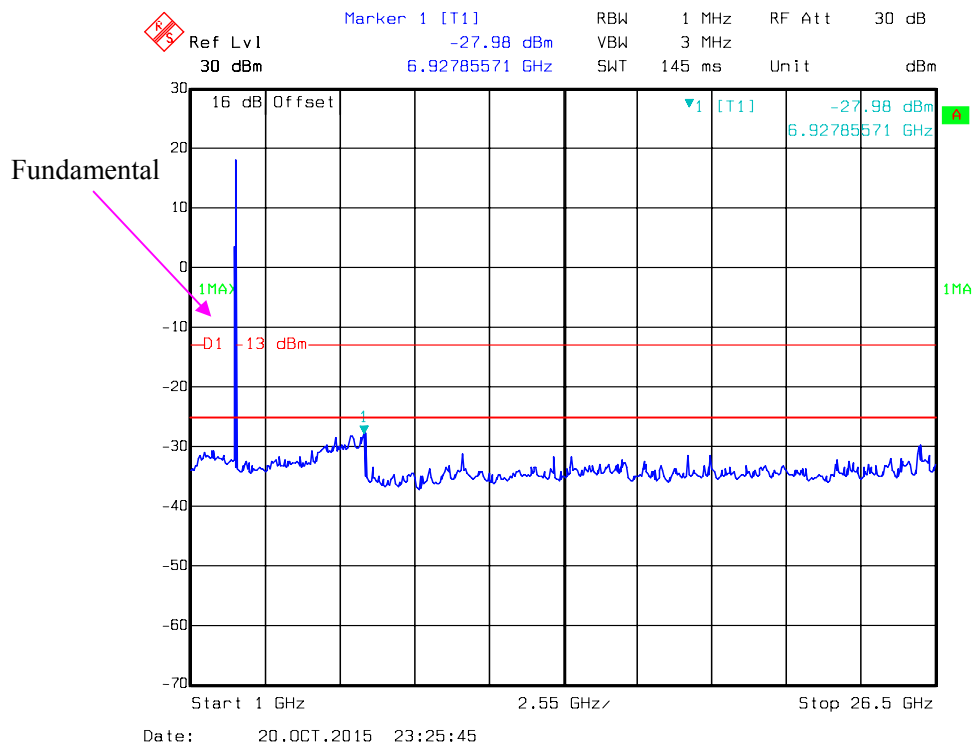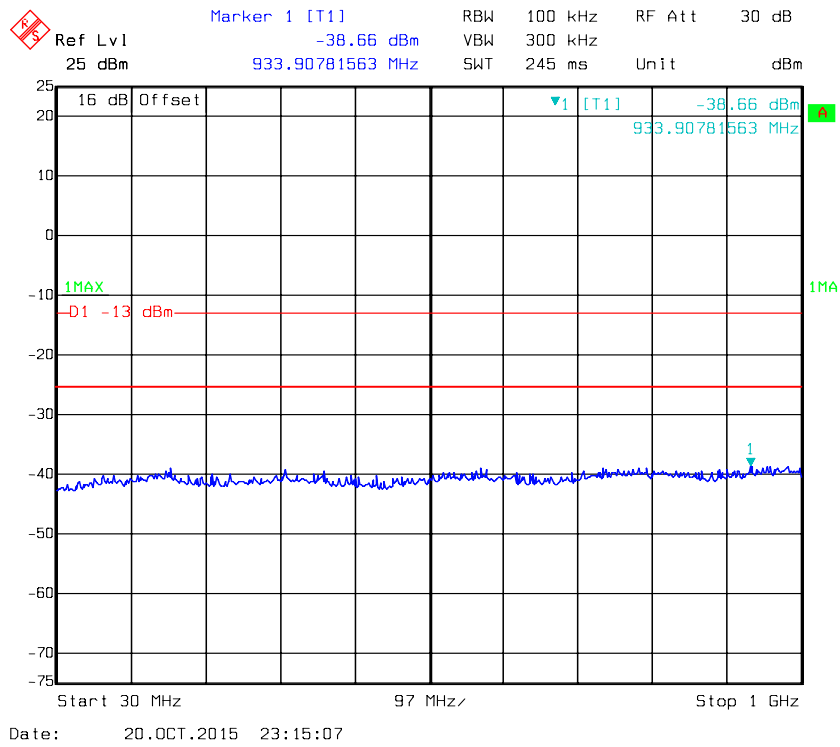

16-QAM, Band 7-10M _ Middle Channel

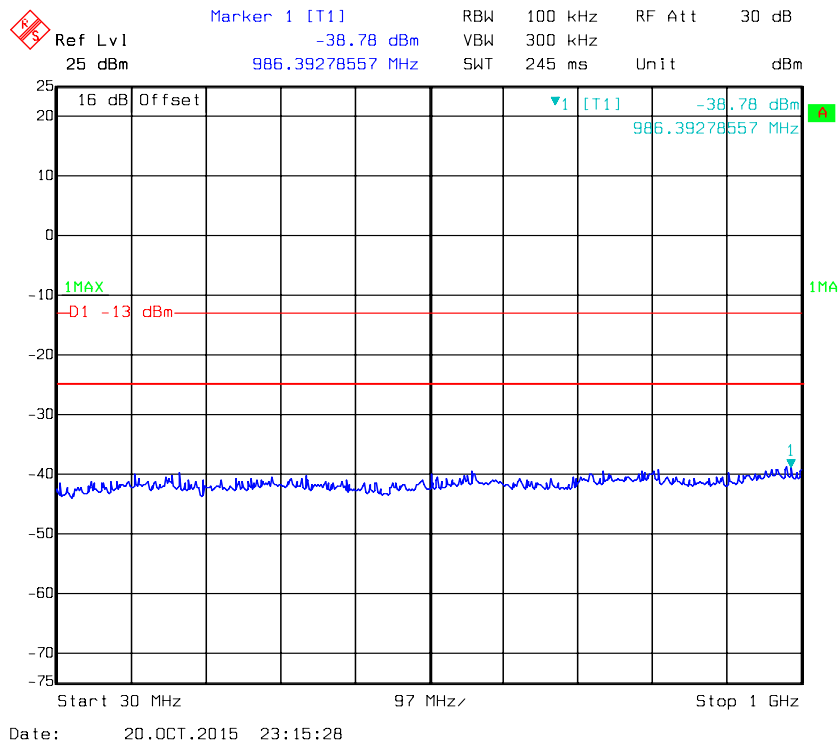

Fundamental

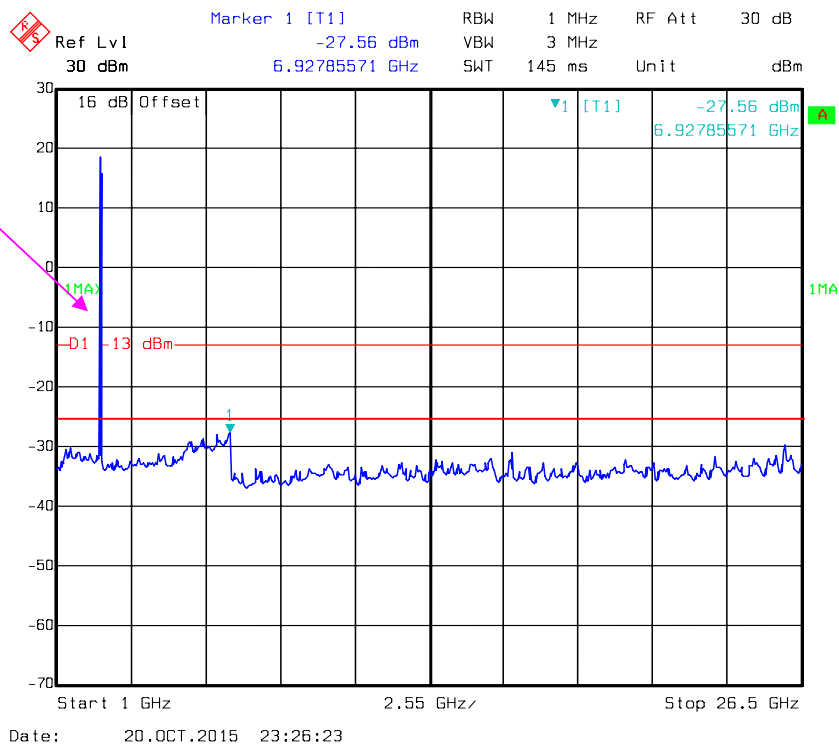

Ref Lvl 25 dBm

Marker 1 [T1] -39.21 dBm

RBW 100 kHz RF Att 30 dB

VBW 300 kHz

SWT 245 ms Unit dBm

16 dB Offset

1MAX


D1 -13 dBm

1



1MA

Start 30 MHz 97 MHz Stop 1 GHz

Date: 20.OCT.2015 23:15:39

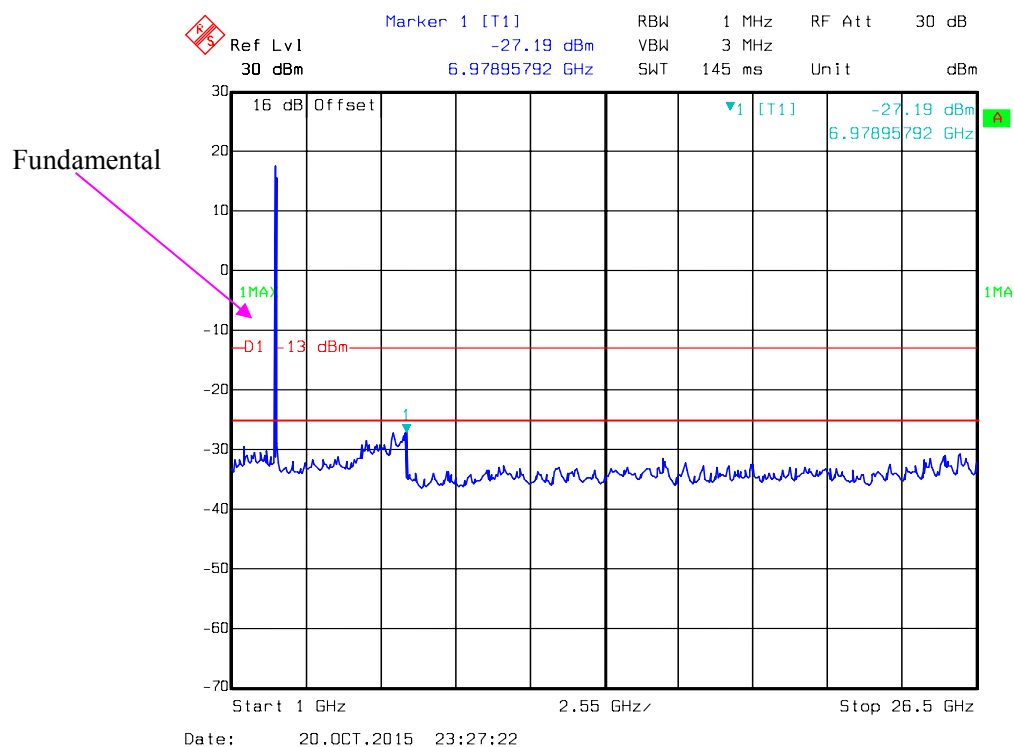

16-QAM, Band 7-20M _ Middle Channel

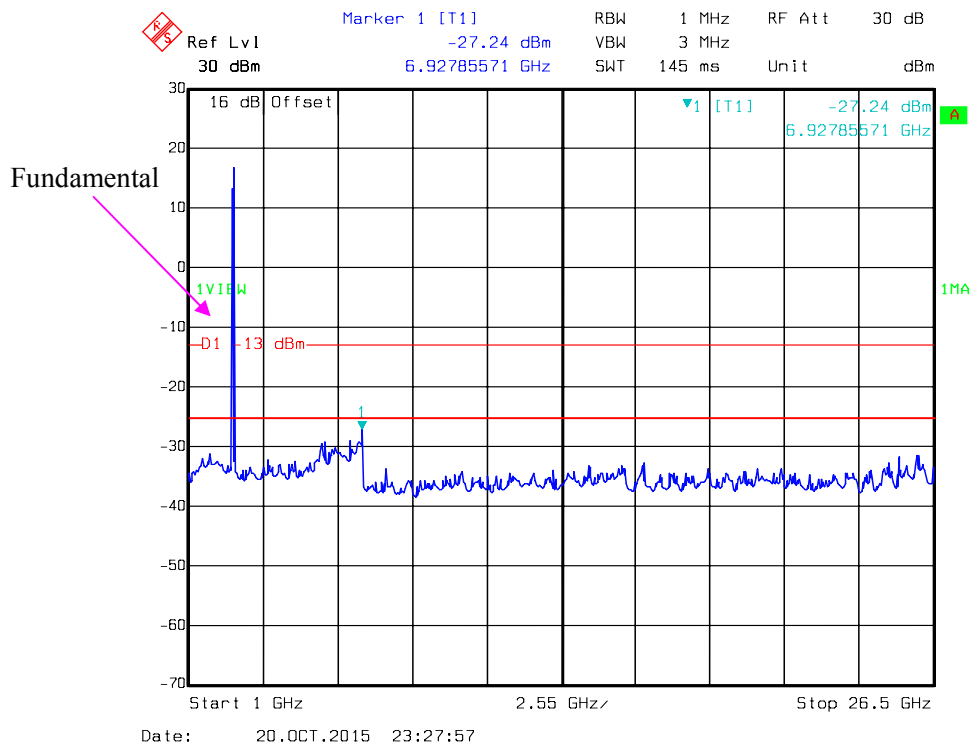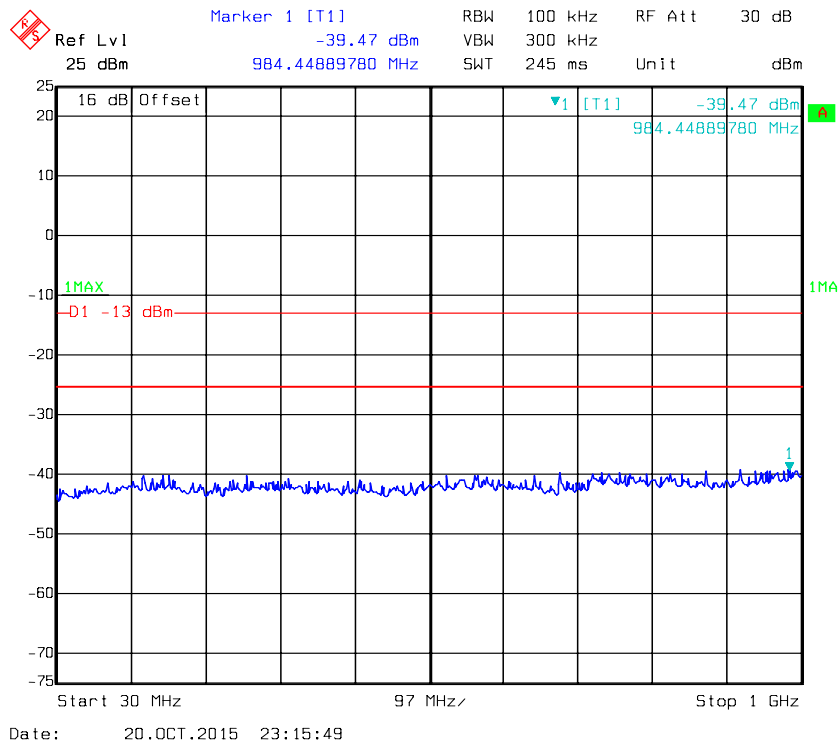

FCC §2.1053, §22.917 & §24.238 & §27.53- SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917, § 24.238 and § 27.53.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg(\text{TXpwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

Spurious attenuation limit in dB = $55 + 10 \log_{10}(\text{power out in Watts})$ for band 7

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
ETS LINDGREN	Horn Antenna	3115	000 527 35	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
Giga	Signal Generator	1026	320408	2015-05-09	2016-05-09
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2015-09-06	2018-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.2°C
Relative Humidity:	50 %
ATM Pressure:	100.5 kPa

The testing was performed by Dean Liu from 2015-10-09.

EUT Operation Mode: Transmitting

Cellular Band (PART 22H)**30 MHz-10 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency:836.6 MHz								
1673.200	H	42.56	-58.5	8.0	1.5	-52.0	-13.0	39.0
1673.200	V	43.09	-58.3	8.0	1.5	-51.8	-13.0	38.8
2509.800	H	60.72	-37.3	9.5	2.8	-30.6	-13.0	17.6
2509.800	V	61.33	-35.8	9.5	2.8	-29.1	-13.0	16.1

For below 1GHz, all spurious emissions are 20dB below the limit or are on the system noise floor level.

WCDMA Band V

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency:836.6 MHz								
1673.200	H	39.16	-61.9	8.0	1.5	-55.4	-13.0	42.4
1673.200	V	40.12	-61.3	8.0	1.5	-54.8	-13.0	41.8

For below 1GHz, all spurious emissions are 20dB below the limit or are on the system noise floor level.

PCS Band (PART 24E)**30 MHz-20 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency:1880 MHz								
3760.000	H	53.60	-40.7	9.3	2.9	-34.3	-13.0	21.3
3760.000	V	54.69	-38.4	9.3	2.9	-32.0	-13.0	19.0

For below 1GHz, all spurious emissions are 20dB below the limit or are on the system noise floor level.

WCDMA Band II

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency:1880 MHz								
3760.000	H	45.32	-49	9.3	2.9	-42.6	-13.0	29.6
3760.000	V	47.51	-45.6	9.3	2.9	-39.2	-13.0	26.2

For below 1GHz, all spurious emissions are 20dB below the limit or are on the system noise floor level.

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = SG Level - Cable loss + Antenna Gain
- 3) Margin = Limit - Absolute Level

LTE Band 4

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency:1732.5 MHz								
3465.000	H	31.83	-65.1	8.4	1.9	-58.6	-13.0	45.6
3465.000	V	32.14	-64	8.4	1.9	-57.5	-13.0	44.5
5197.500	H	45.85	-45.2	10.4	2.3	-37.1	-13.0	24.1
5197.500	V	46.13	-46.4	10.4	2.3	-38.3	-13.0	25.3
16- QAM, Frequency:1732.5 MHz								
3465.000	H	32.10	-64.8	8.4	1.9	-58.3	-13.0	45.3
3465.000	V	32.81	-63.4	8.4	1.9	-56.9	-13.0	43.9
5197.500	H	45.75	-45.3	10.4	2.3	-37.2	-13.0	24.2
5197.500	V	45.91	-46.6	10.4	2.3	-38.5	-13.0	25.5

For below 1GHz, all spurious emissions are 20dB below the limit or are on the system noise floor level.

LTE Band 7

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency:2535.000 MHz								
5070.000	H	46.21	-45.1	10.4	2.4	-37.1	-25.0	12.1
5070.000	V	46.73	-45.4	10.4	2.4	-37.4	-25.0	12.4
7605.000	H	37.69	-49.8	10.9	3.1	-42.0	-25.0	17.0
7605.000	V	38.47	-49.0	10.9	3.1	-41.2	-25.0	16.2
16- QAM, Frequency: 2535.000 MHz								
5070.000	H	46.33	-45	10.4	2.4	-37.0	-25.0	12.0
5070.000	V	46.89	-45.2	10.4	2.4	-37.2	-25.0	12.2
7605.000	H	37.17	-50.3	10.9	3.1	-42.5	-25.0	17.5
7605.000	V	37.98	-49.5	10.9	3.1	-41.7	-25.0	16.7

For below 1GHz, all spurious emissions are 20dB below the limit or are on the system noise floor level.

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = SG Level - Cable loss + Antenna Gain
- 3) Margin = Limit - Absolute Level

FCC §22.917(a) & §24.238(a) & §27.53(g)§27.53(h) §27.53(m) - BAND EDGES**Applicable Standard**

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (g), For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.


According to §27.53 (h), AWS emission limits—(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to §27.53 (m), (4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

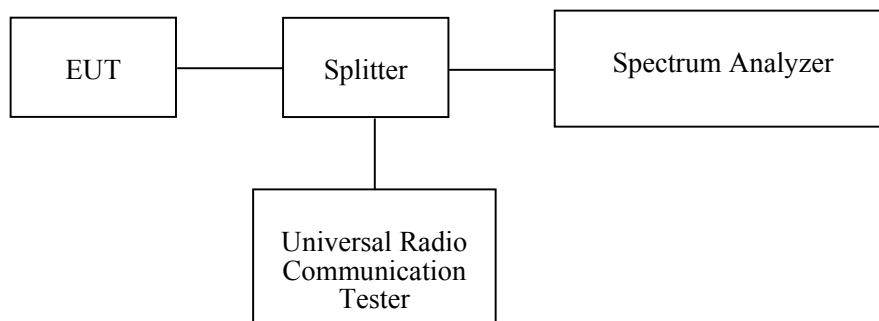

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
R&S	Universal Radio Communication Tester	CMU200	109038	2015-05-09	2016-05-09
R&S	Wideband Radio Communication Tester	CMW500	106891	2014-12-19	2015-12-19

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	26.6~27.3 °C
Relative Humidity:	54~58 %
ATM Pressure:	100.1~100.7 kPa

The testing was performed by Dean Liu from 2015-10-08 to 2015-10-20.


Test Mode: Transmitting

Test Result: Compliance. Please refer to the following plots.


GSM 850, Left Band Edge

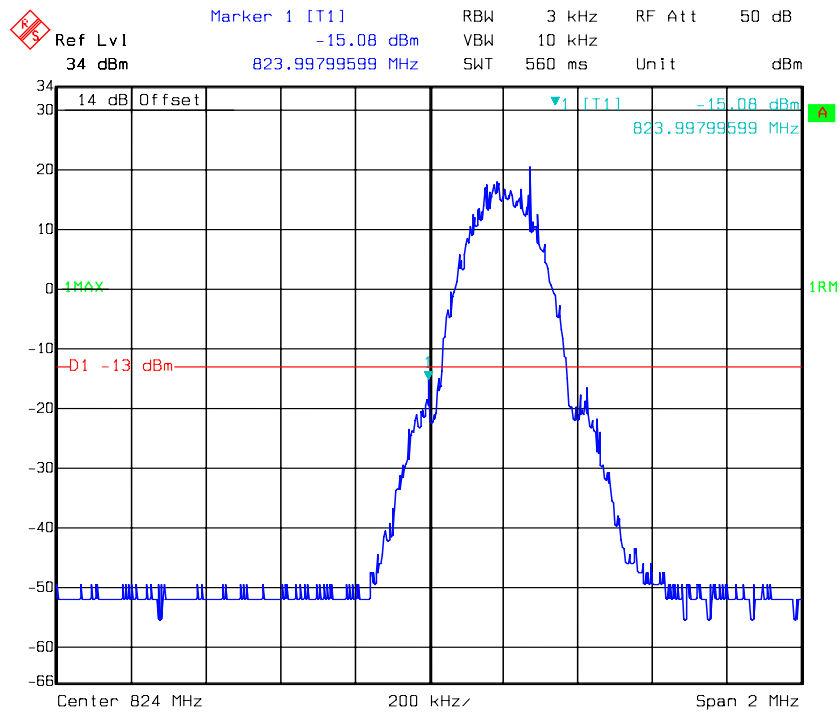


GSM 850, Right Band Edge

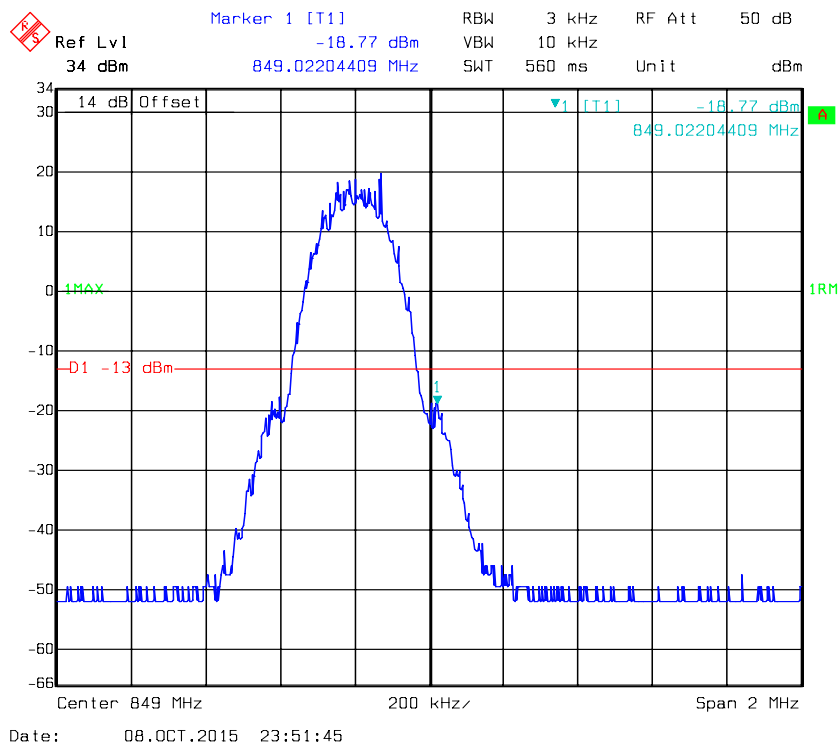


GSM 1900, Left Band Edge

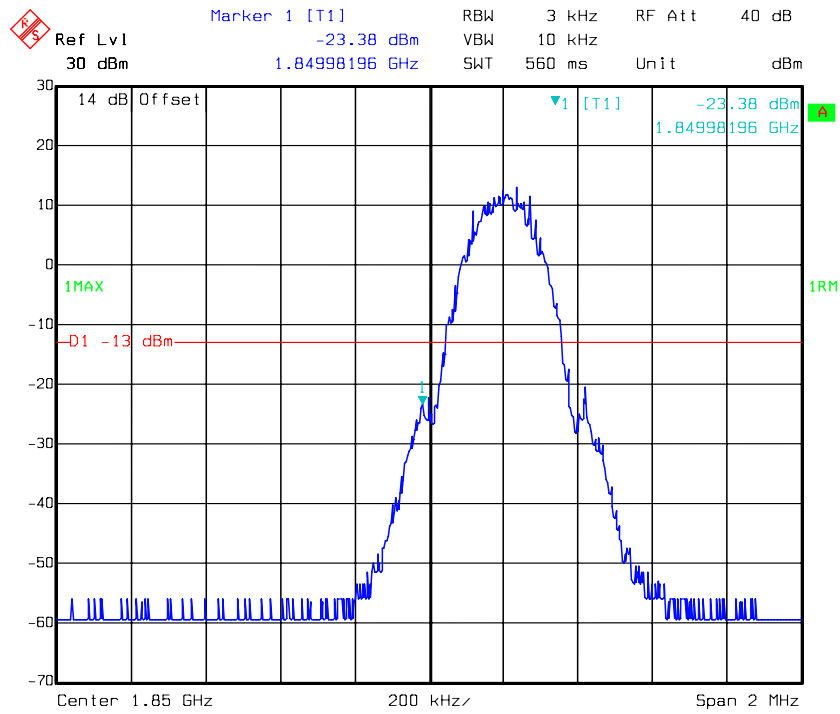


GSM 1900, Right Band Edge

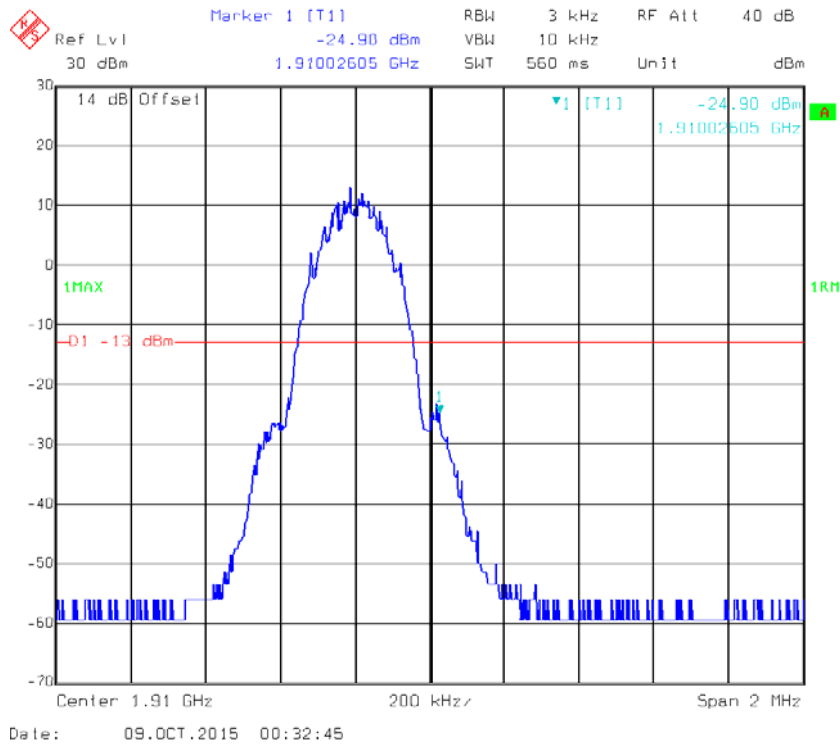


EDGE 850, Left Band Edge

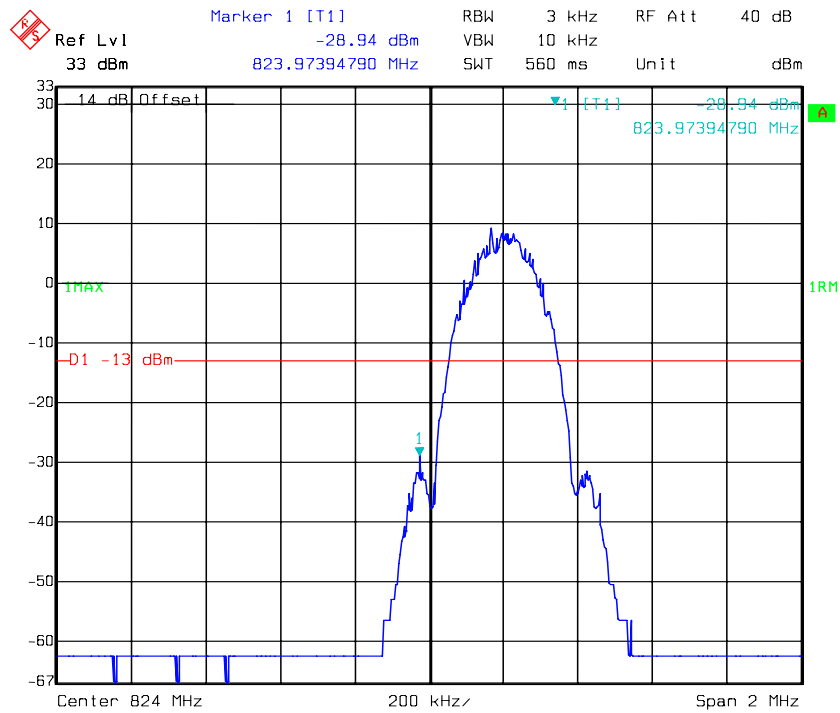

EDGE 850, Right Band Edge

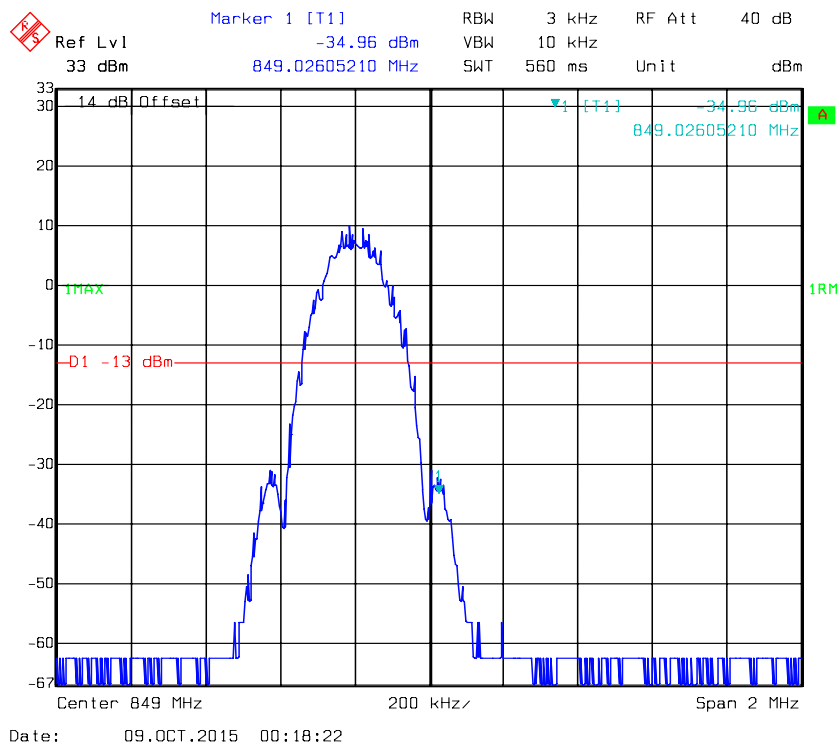


EDGE 1900, Left Band Edge

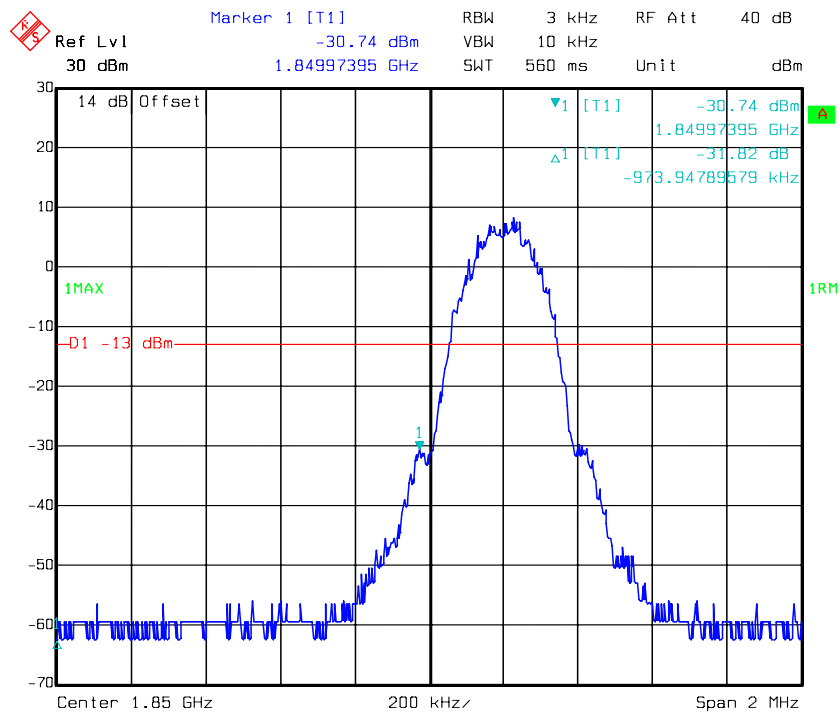


Date: 09.OCT.2015 00:45:22

EDGE 1900, Right Band Edge

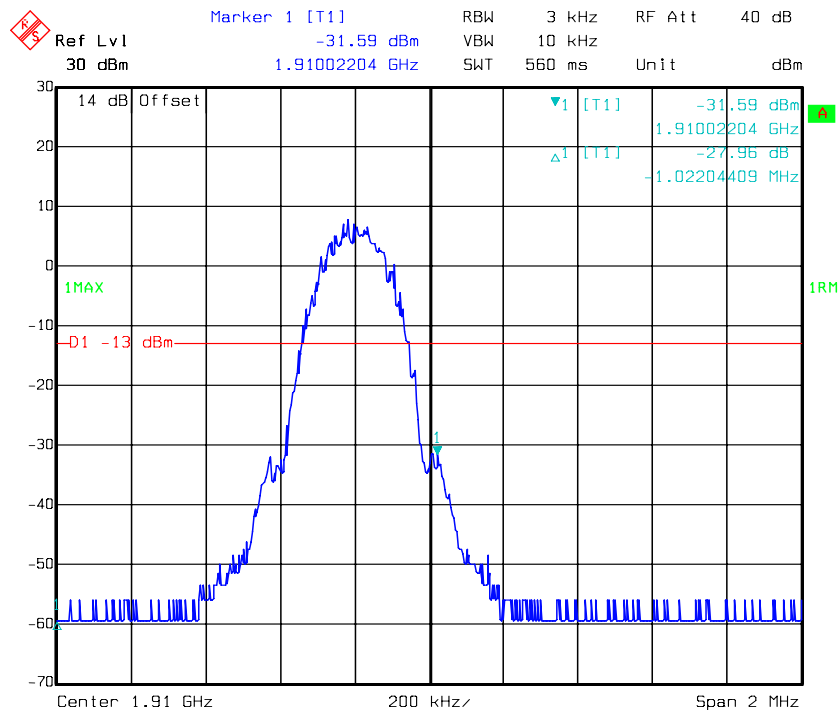




Date: 09.OCT.2015 00:46:29

REL99 Band II, Left Band Edge

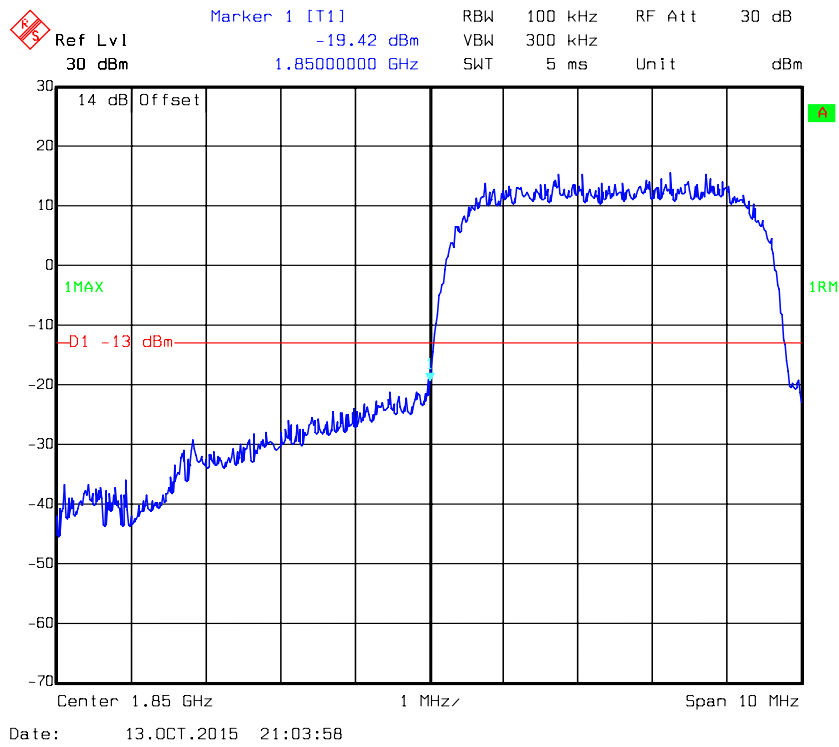


REL99 Band II, Right Band Edge

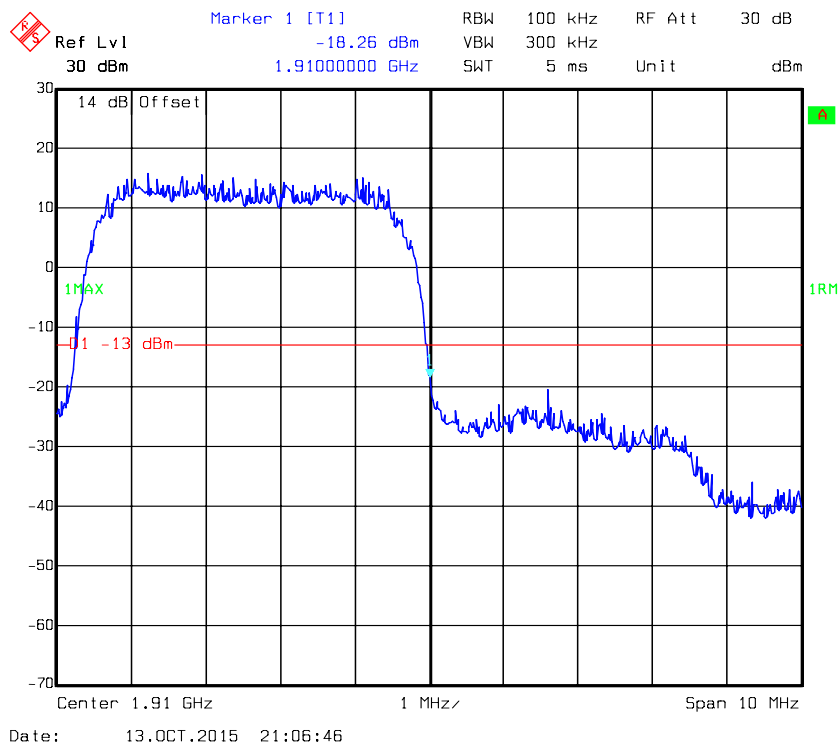

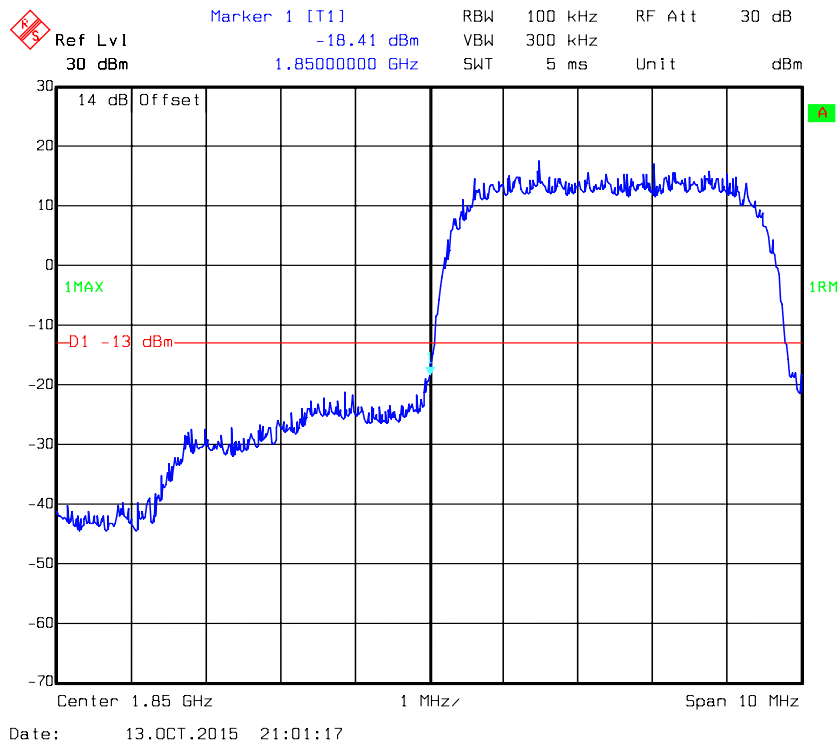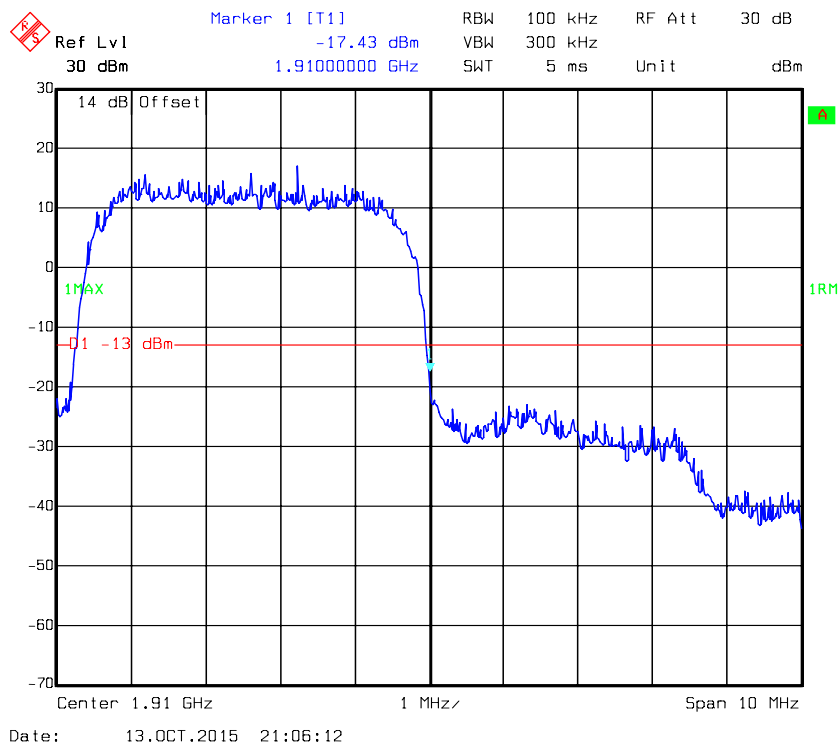
HSDPA Band II, Left Band Edge**HSDPA Band II, Right Band Edge**

HSUPA Band II, Left Band Edge

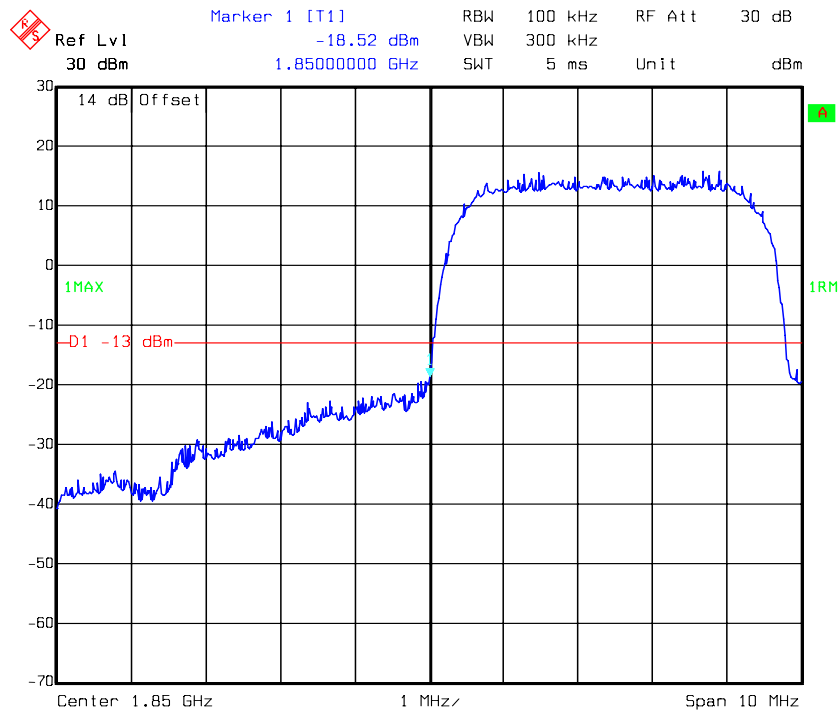


Date: 13.OCT.2015 21:03:49

HSUPA Band II, Right Band Edge

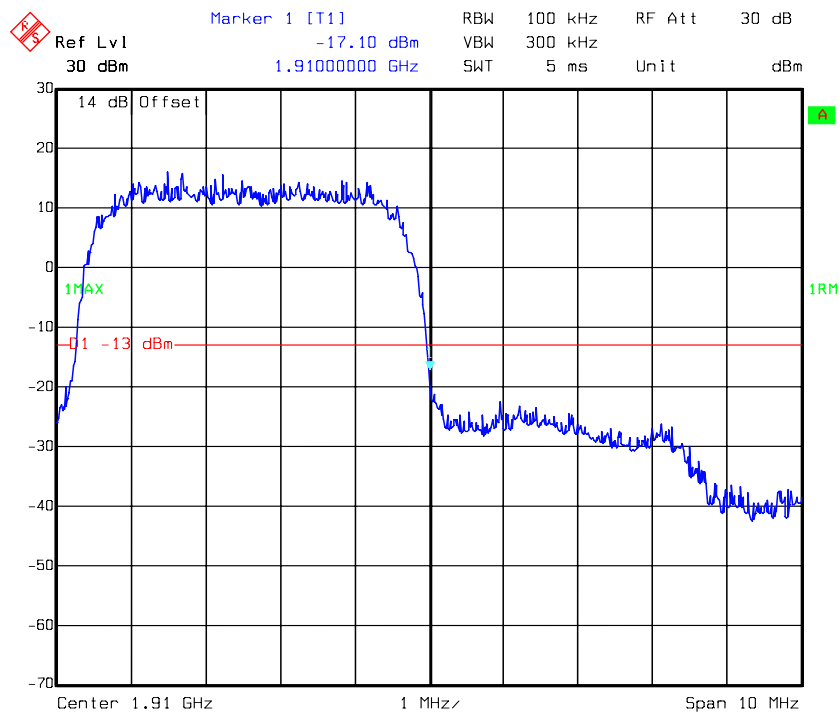


Date: 13.OCT.2015 21:06:21


REL99 Band V, Left Band Edge

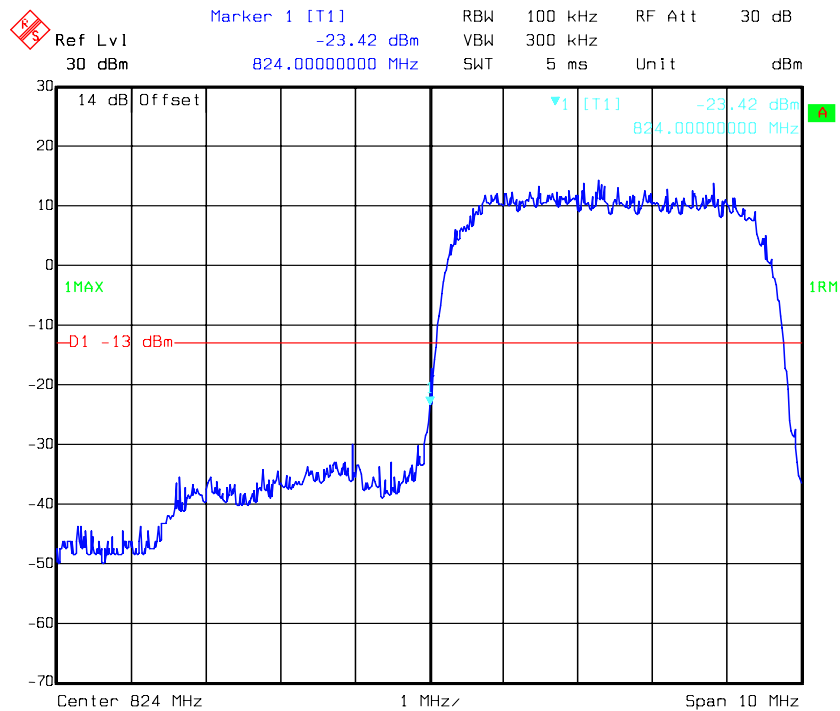


REL99 Band V Right Band Edge

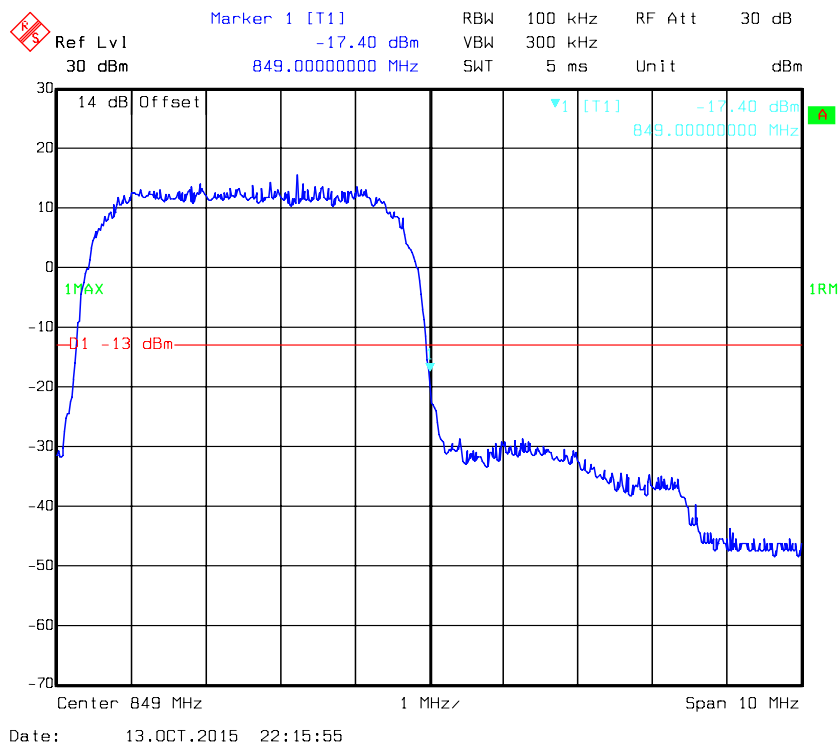


HSDPA Band V, Left Band Edge

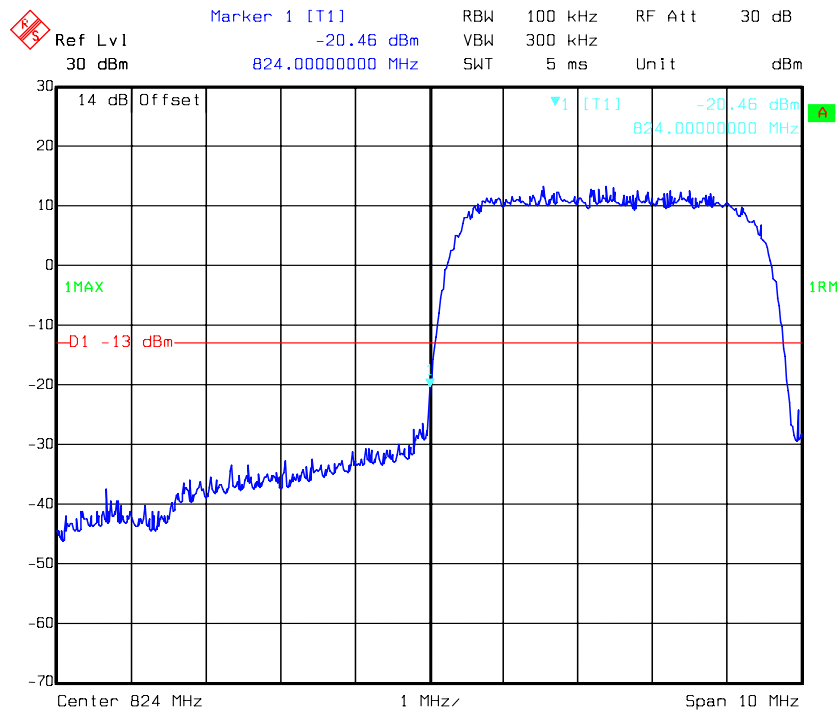


HSDPA Band V, Right Band Edge

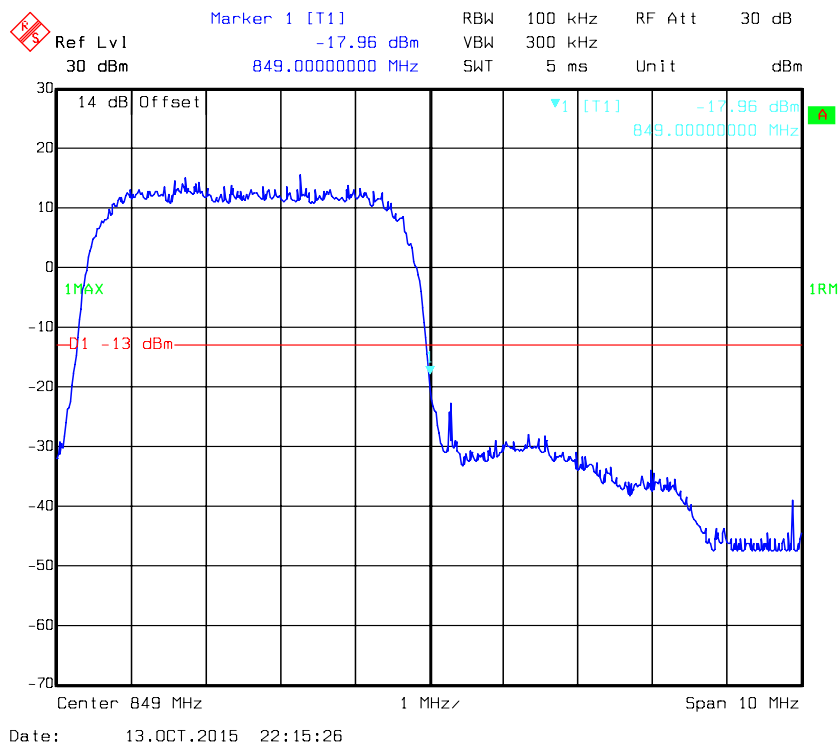

HSUPA Band V, Left Band Edge

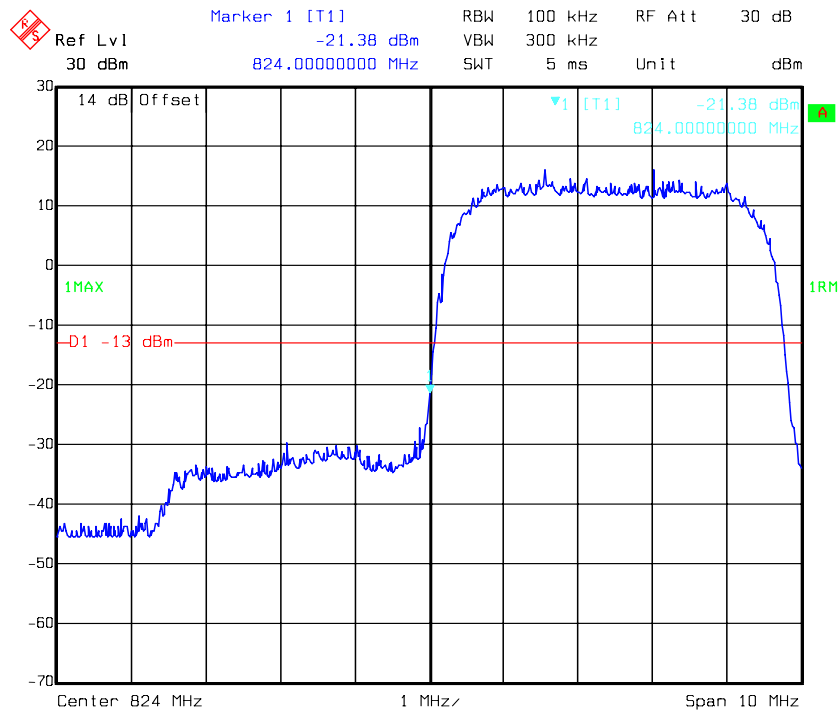


HSUPA Band V, Right Band Edge

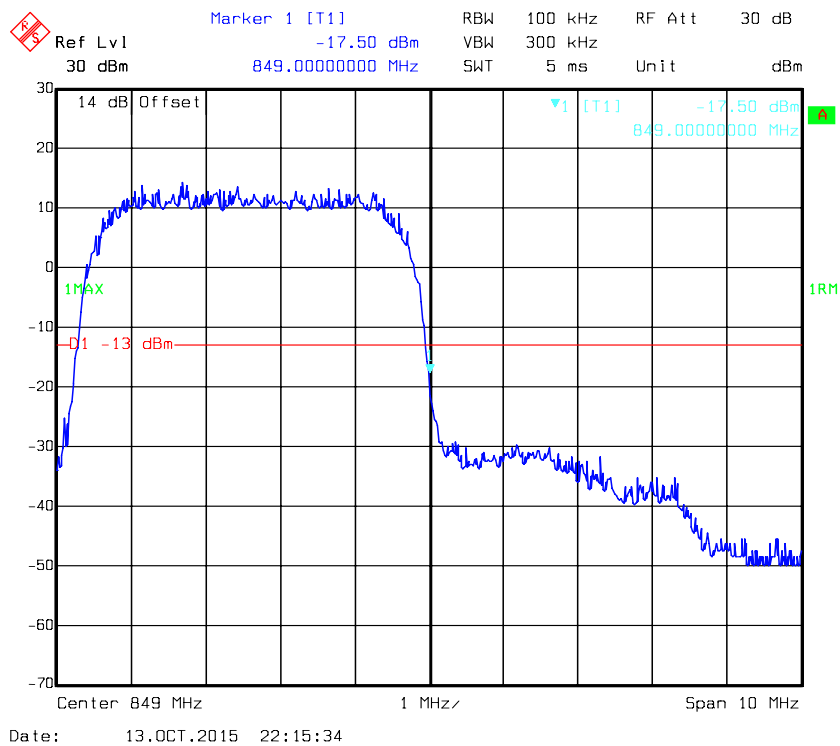


LTE Band 4:

QPSK-1.4M 1RB, Left Band Edge

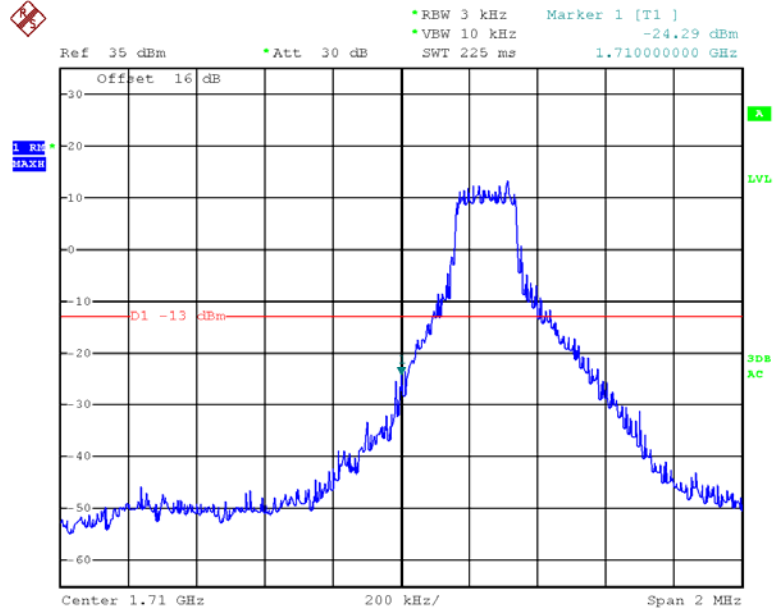


Date: 14.OCT.2015 23:55:22

QPSK-1.4M 1RB, Right Band Edge

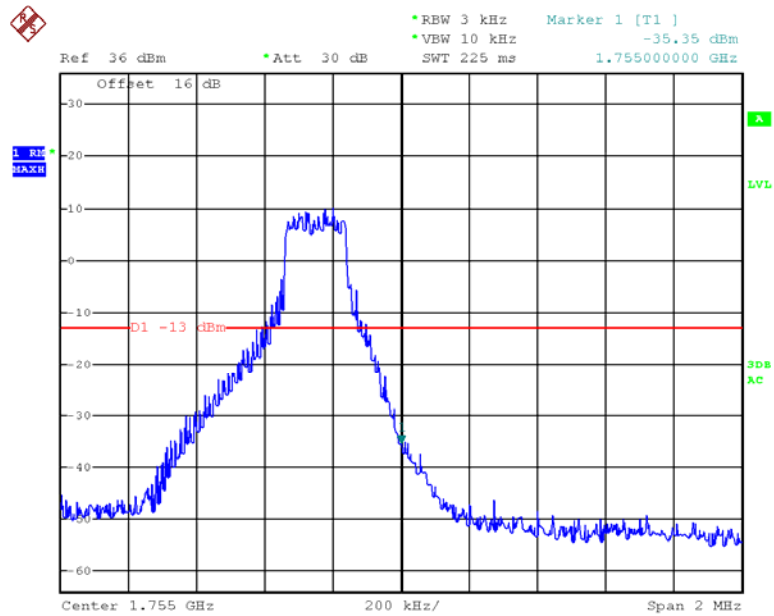


Date: 15.OCT.2015 00:10:38

QPSK-1.4M 6RB, Left Band Edge

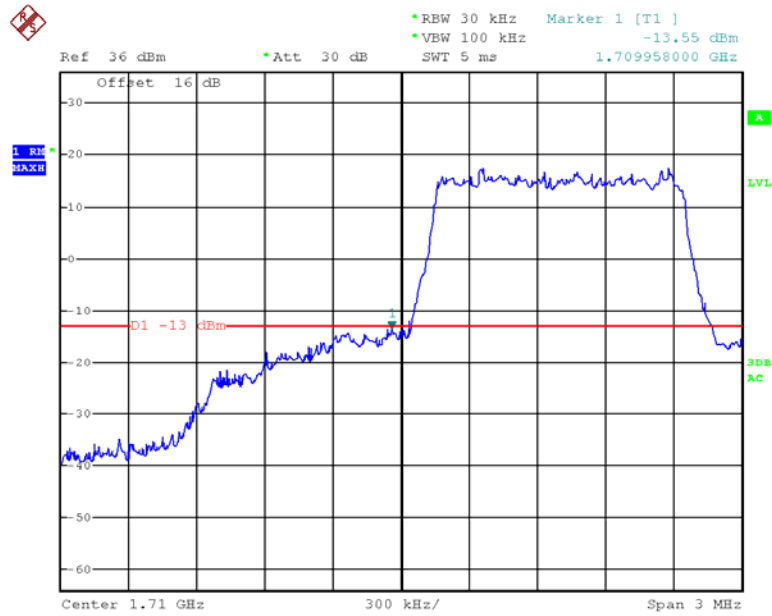


Date: 15.OCT.2015 00:15:11

QPSK-1.4M 6RB, Right Band Edge

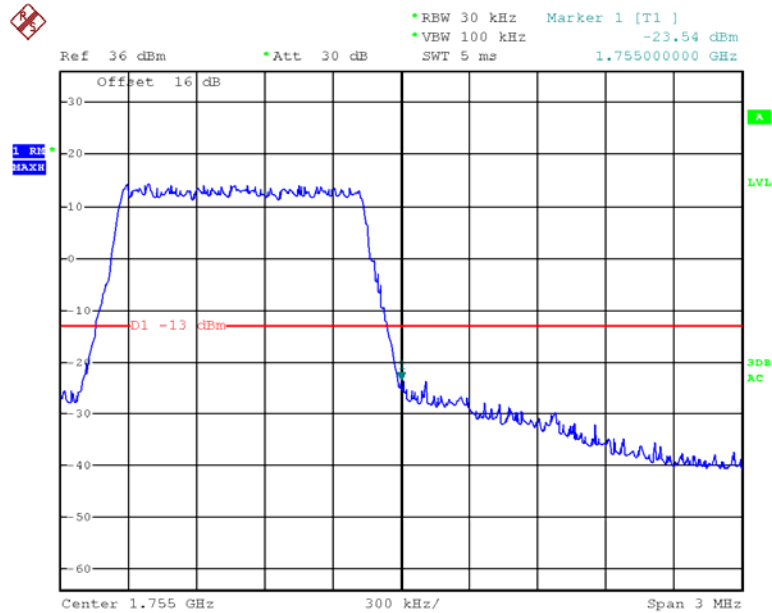


Date: 15.OCT.2015 00:12:41

QPSK-3M 1RB, Left Band Edge

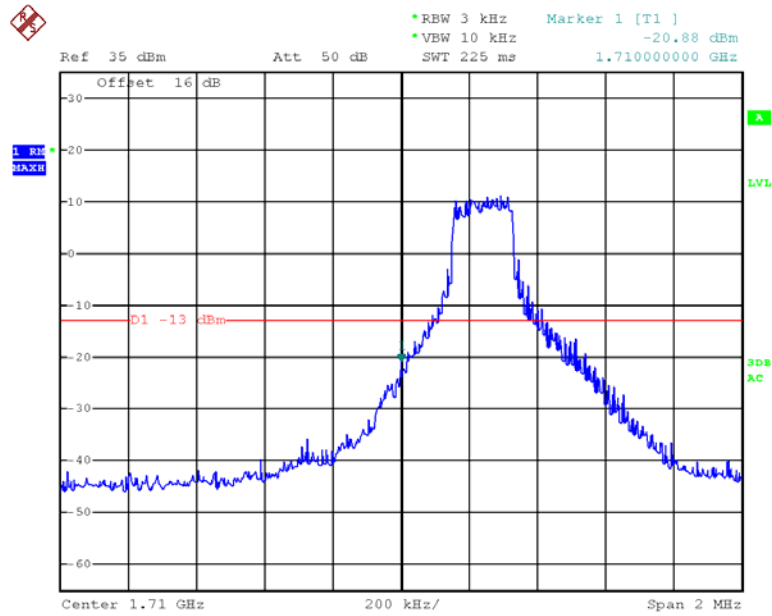


Date: 15.OCT.2015 21:47:00

QPSK-3M 1RB, Right Band Edge

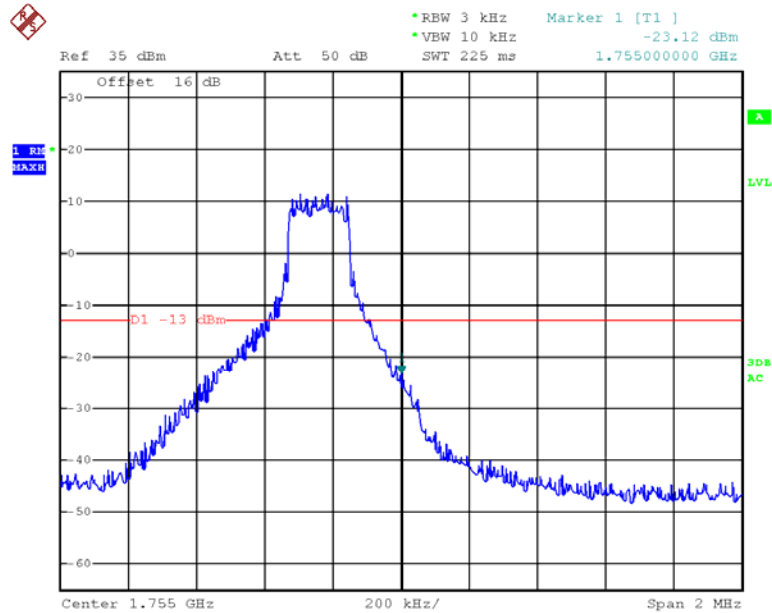


Date: 15.OCT.2015 21:54:28

QPSK-3M 15 RB, Left Band Edge

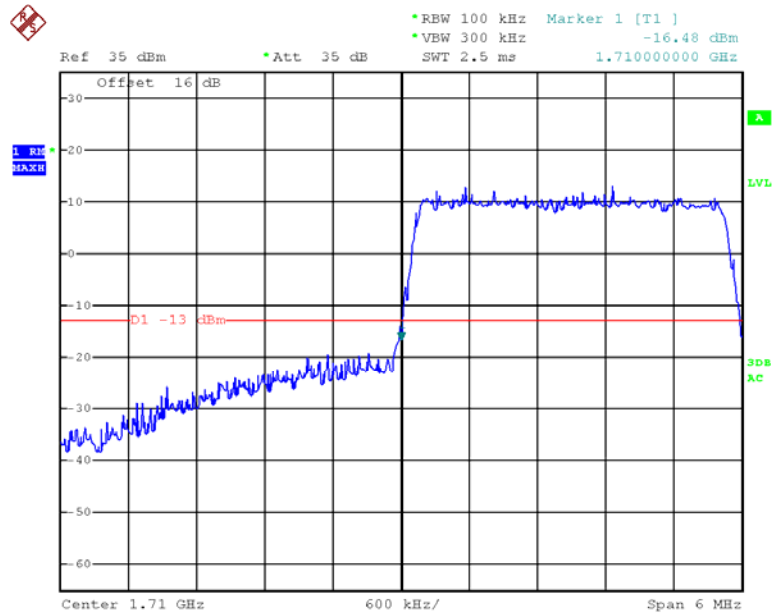


Date: 15.OCT.2015 22:07:32

QPSK-3M 15 RB, Right Band Edge

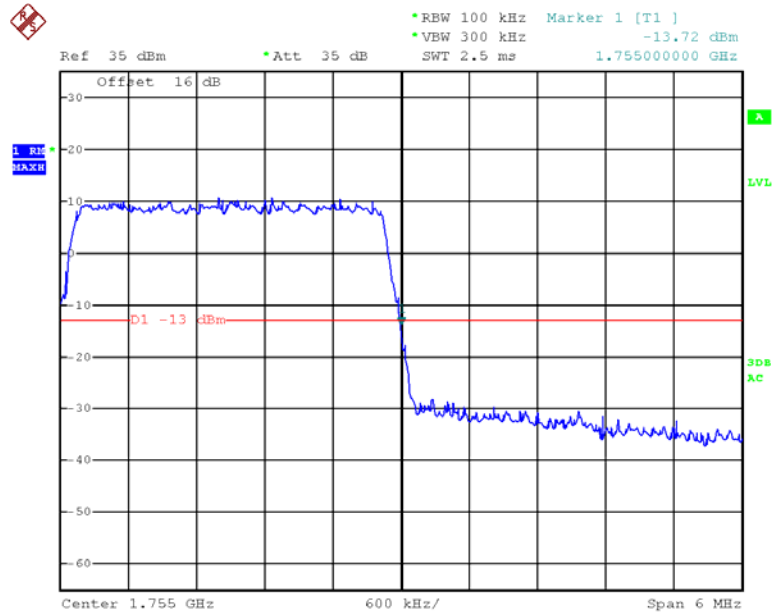


Date: 15.OCT.2015 22:04:40

QPSK-5M 1RB, Left Band Edge

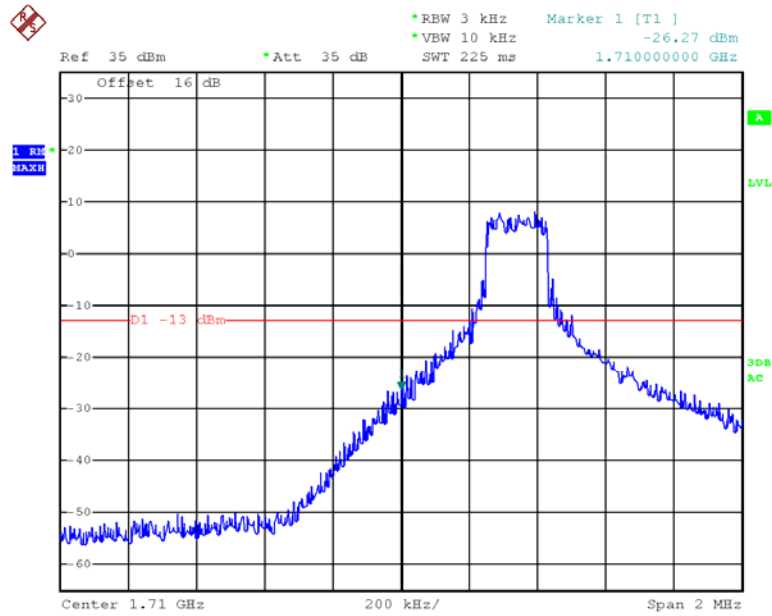


Date: 15.OCT.2015 22:20:53

QPSK-5M 1RB, Right Band Edge

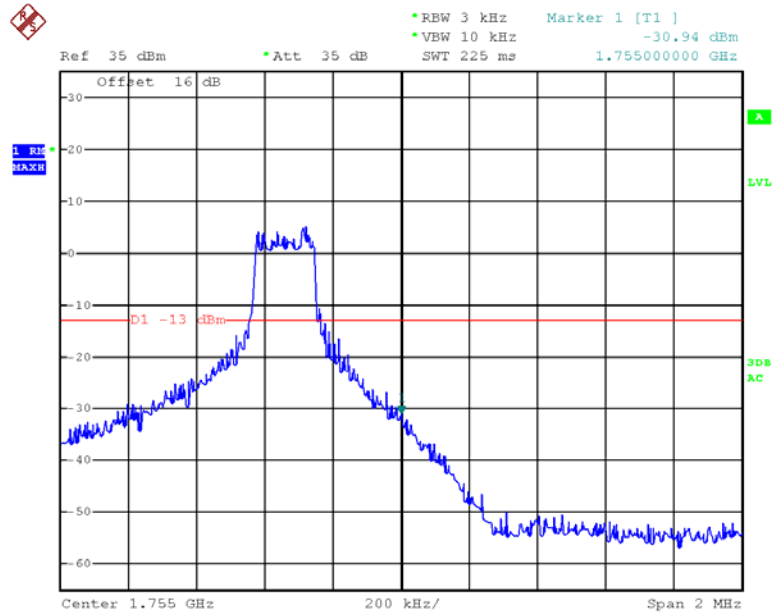


Date: 15.OCT.2015 22:18:22

QPSK-5M 25 RB, Left Band Edge

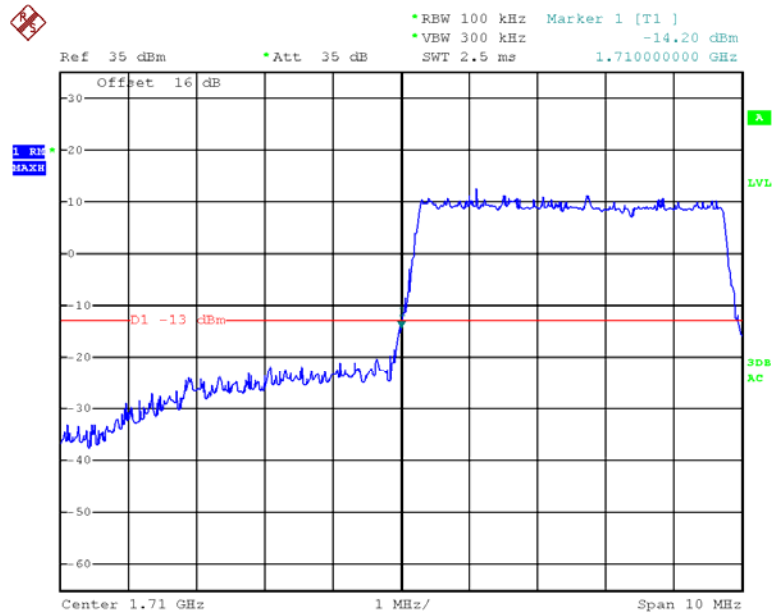


Date: 15.OCT.2015 22:11:09

QPSK-5M 25 RB, Right Band Edge

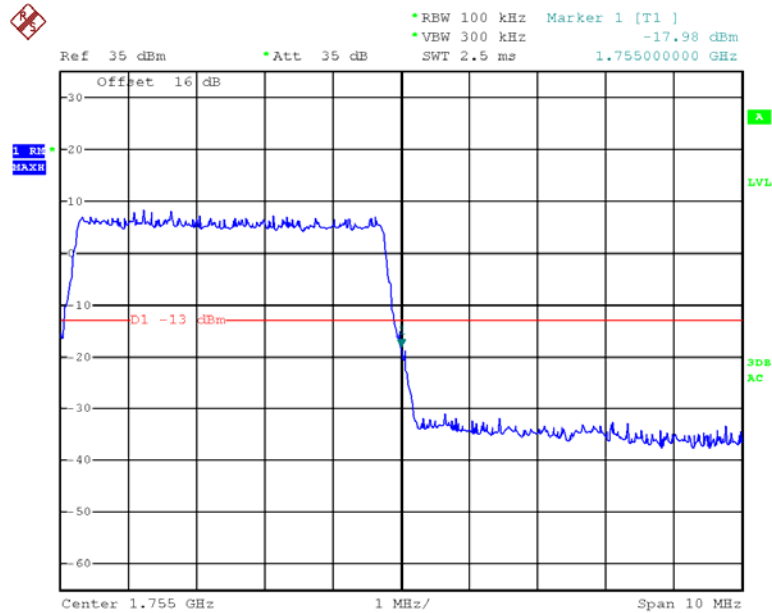


Date: 15.OCT.2015 22:16:31

QPSK-10M 1RB, Left Band Edge

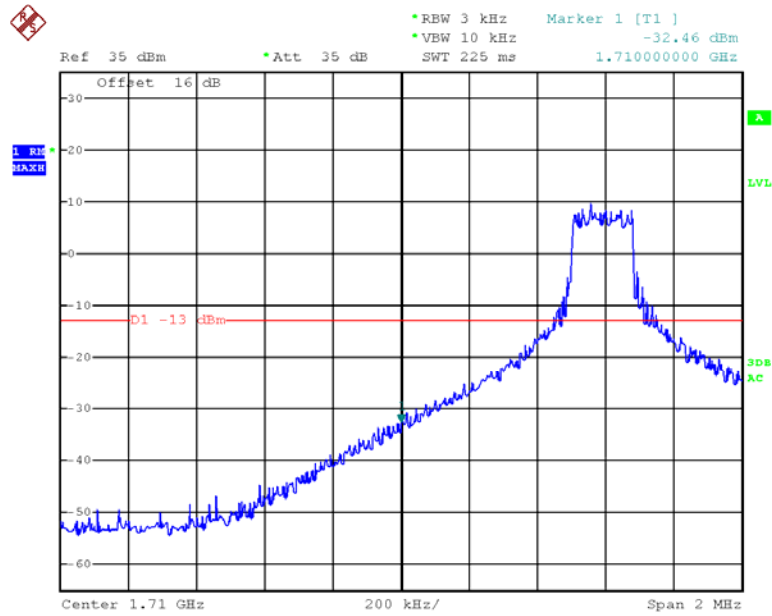


Date: 15.OCT.2015 22:27:13

QPSK-10M 1RB, Right Band Edge

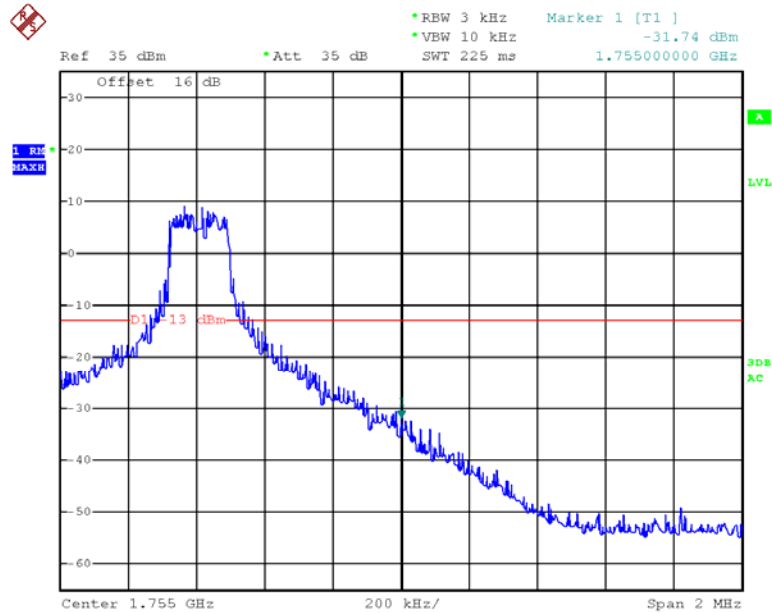


Date: 15.OCT.2015 22:31:22

QPSK-10M 50 RB, Left Band Edge

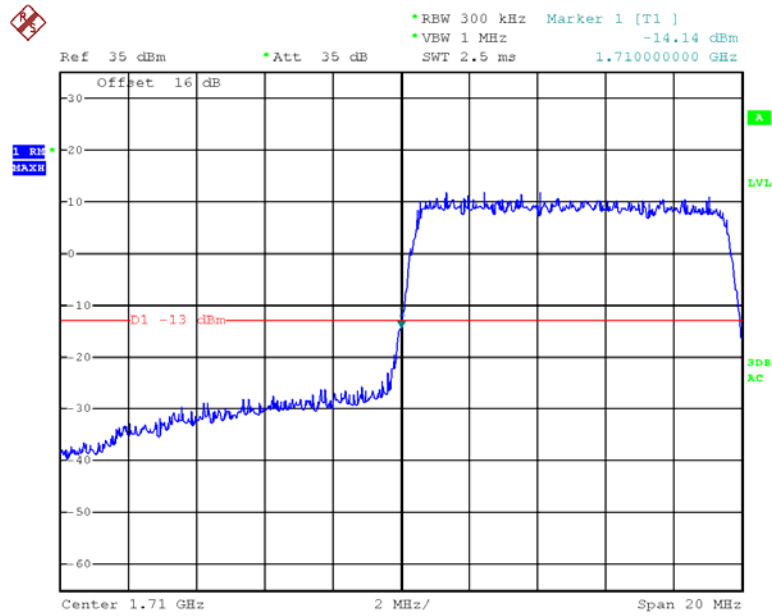


Date: 15.OCT.2015 22:42:18

QPSK-10M 50 RB, Right Band Edge

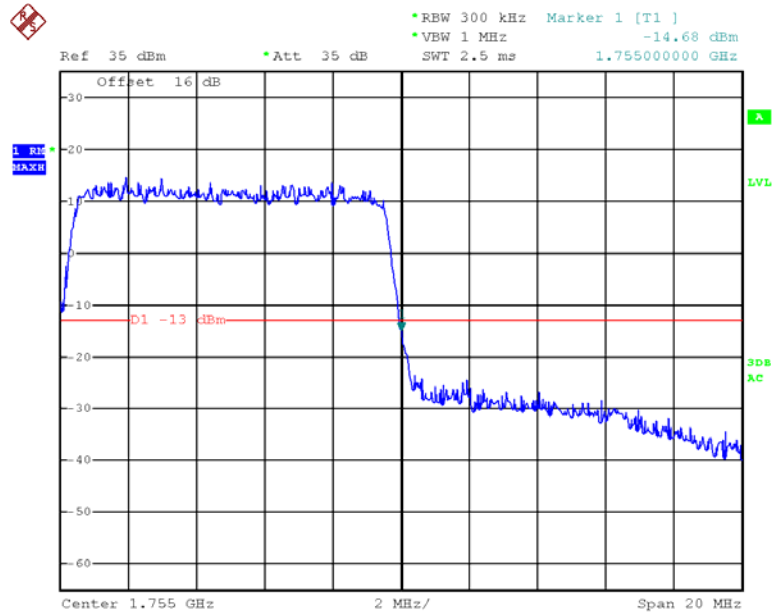


Date: 15.OCT.2015 22:35:22

QPSK-15M 1RB, Left Band Edge

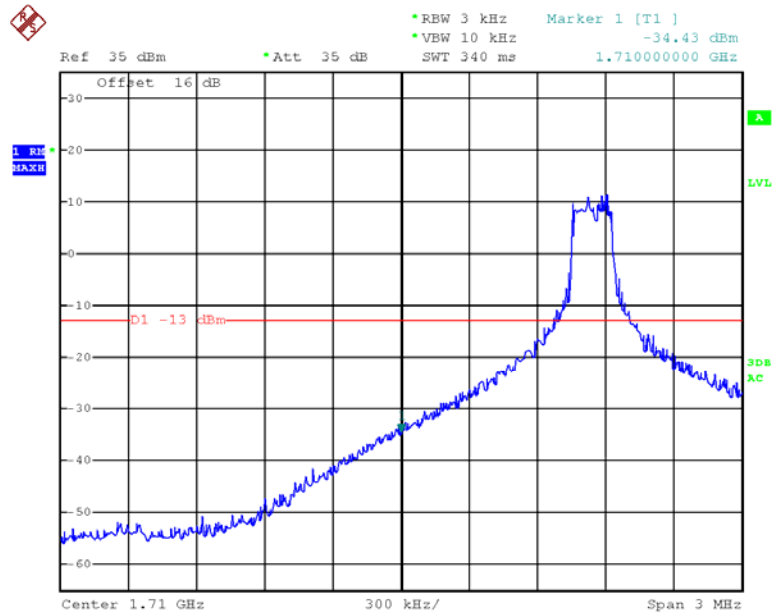


Date: 15.OCT.2015 22:58:41

QPSK-15M 1RB, Right Band Edge

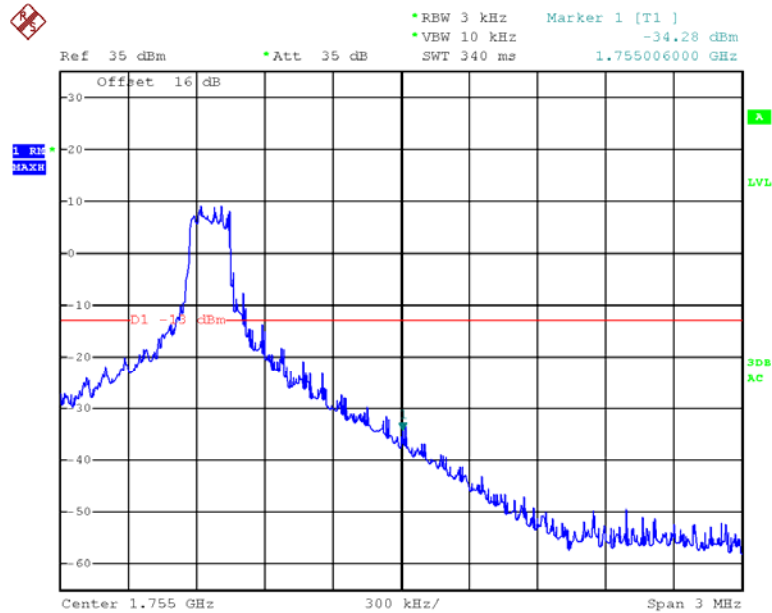


Date: 15.OCT.2015 22:57:12

QPSK-15M 75 RB, Left Band Edge

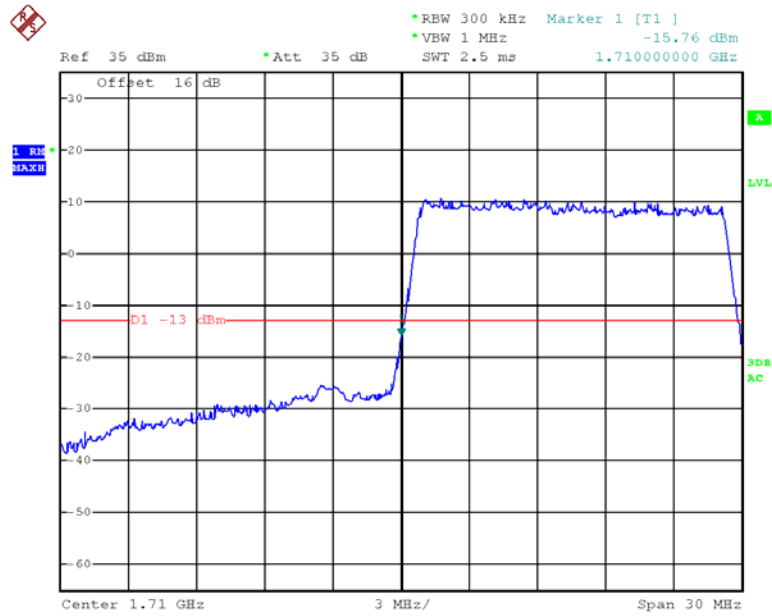


Date: 15.OCT.2015 22:48:56

QPSK-15M 75 RB, Right Band Edge

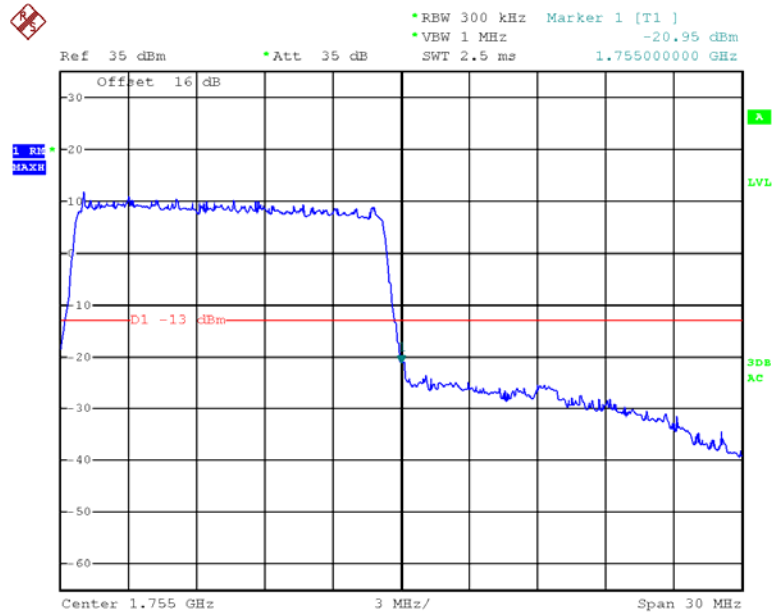


Date: 15.OCT.2015 22:52:39

QPSK-20M 1RB, Left Band Edge

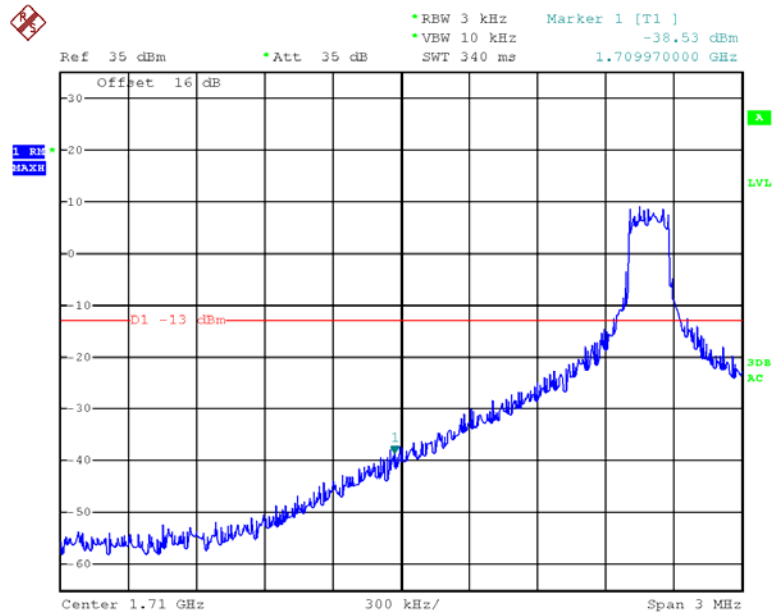


Date: 15.OCT.2015 23:03:43

QPSK-20M 1RB, Right Band Edge

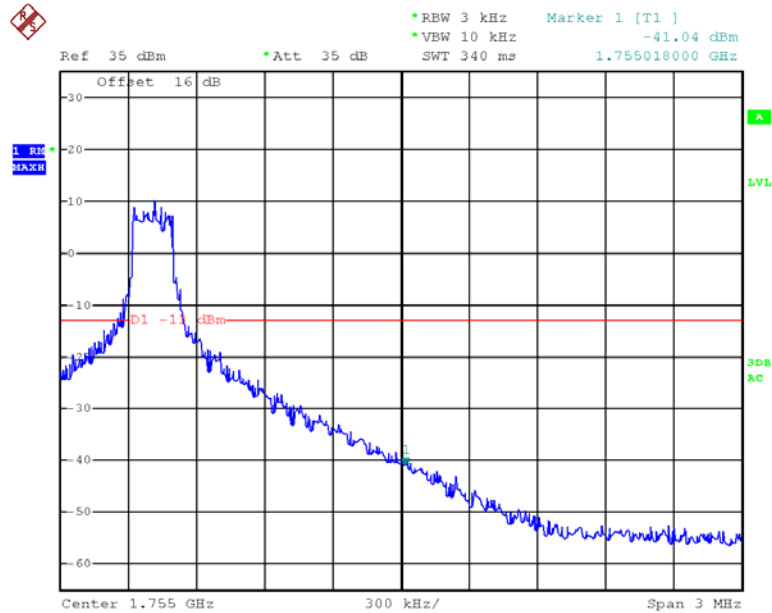


Date: 15.OCT.2015 23:06:20

QPSK-20M 100 RB, Left Band Edge

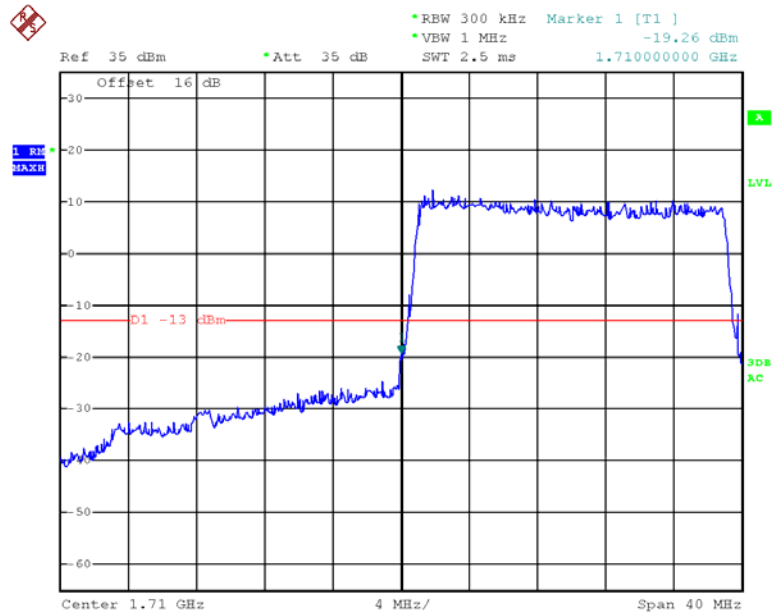


Date: 15.OCT.2015 23:11:45

QPSK-20M 100 RB, Right Band Edge

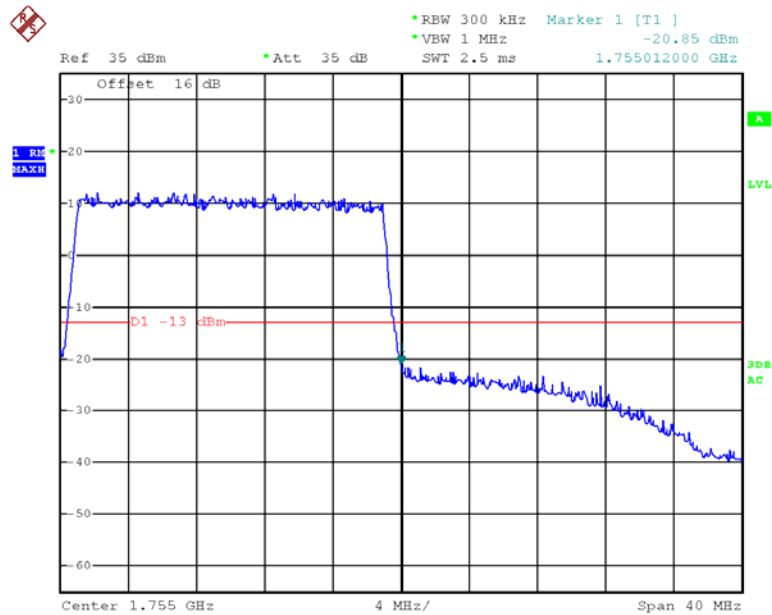


Date: 15.OCT.2015 23:08:18

16QAM -1.4M 1RB, Left Band Edge

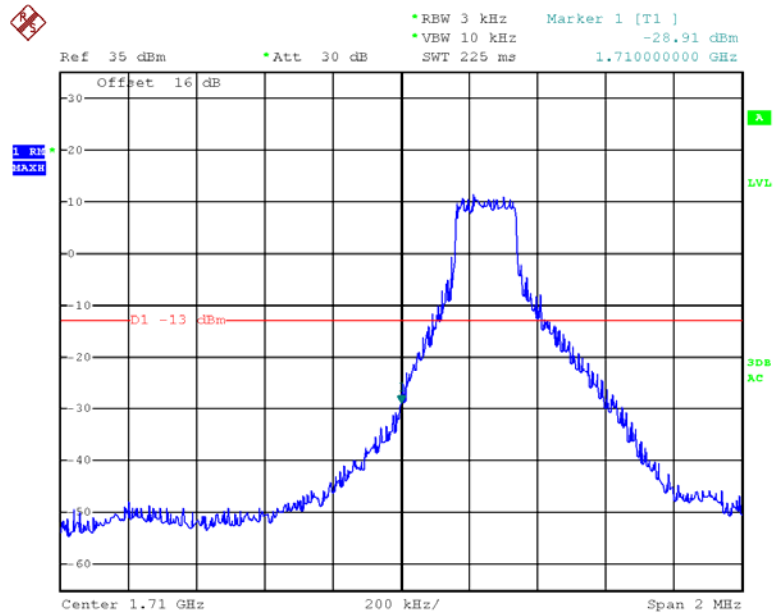


Date: 14.OCT.2015 23:54:38

16QAM -1.4M 1RB, Right Band Edge

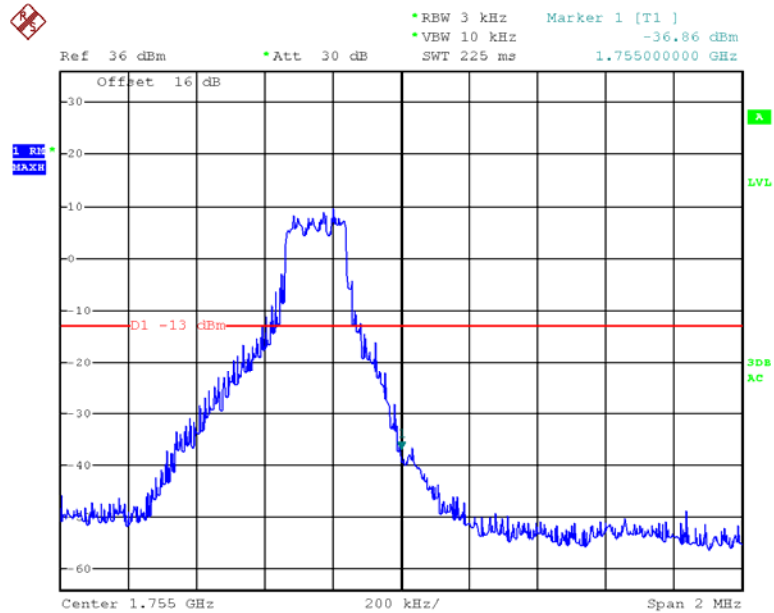


Date: 15.OCT.2015 00:10:46

16QAM -1.4M 6 RB, Left Band Edge

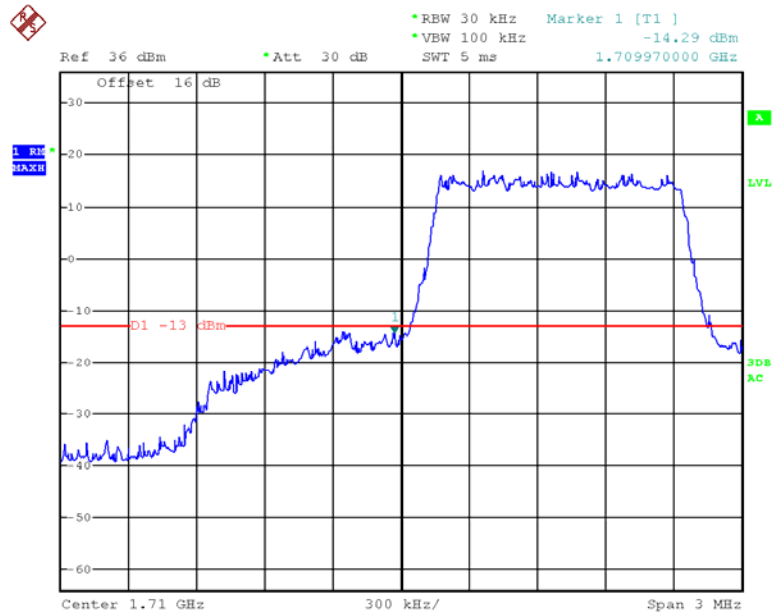


Date: 15.OCT.2015 00:14:52

16QAM -1.4M 6 RB, Right Band Edge

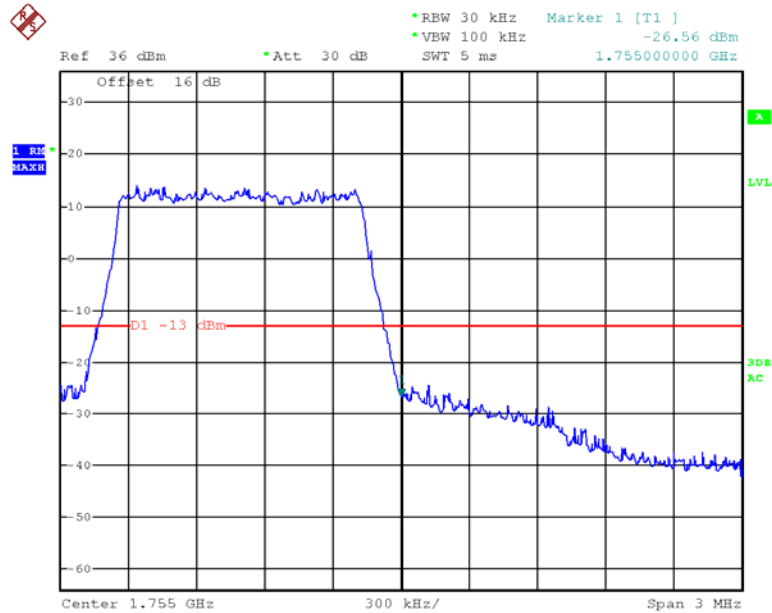


Date: 15.OCT.2015 00:12:28

16QAM -3M 1RB, Left Band Edge

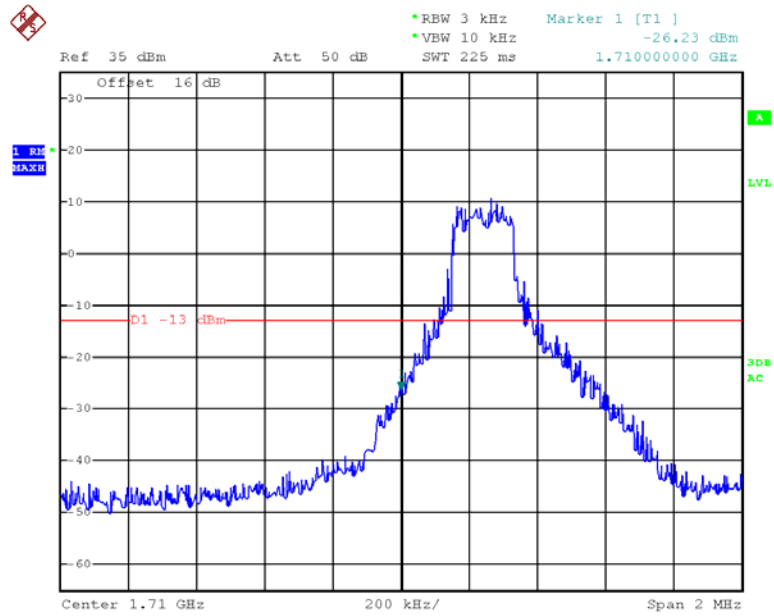


Date: 15.OCT.2015 21:48:01

16QAM -3M 1RB, Right Band Edge

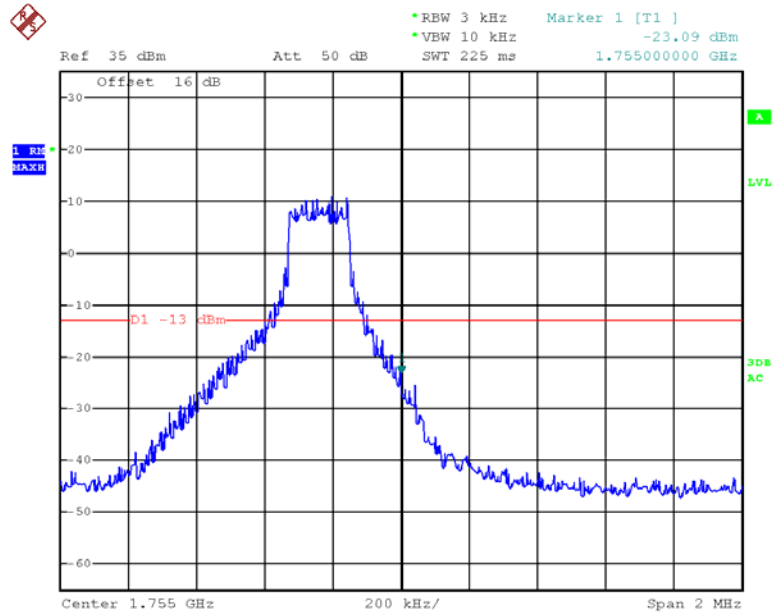


Date: 15.OCT.2015 21:54:11

16QAM -3M 15 RB, Left Band Edge

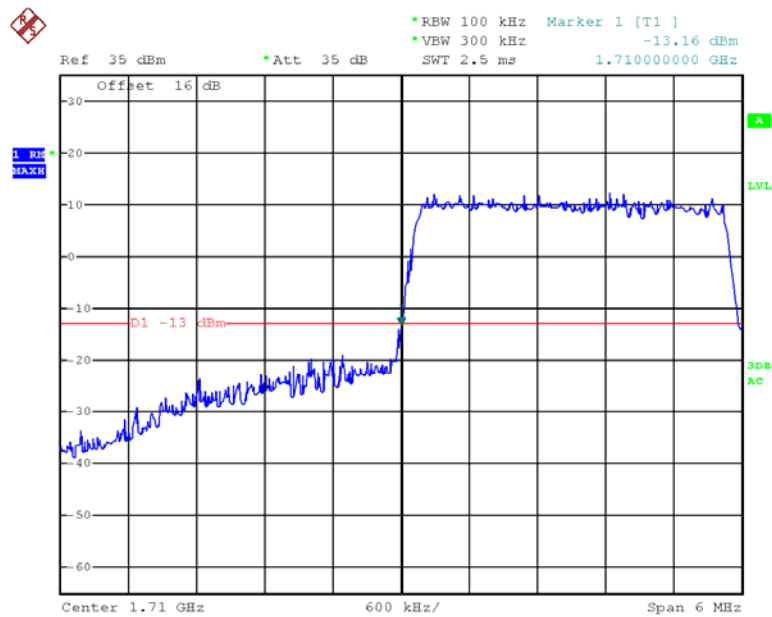


Date: 15.OCT.2015 22:07:12

16QAM -3M 15 RB, Right Band Edge

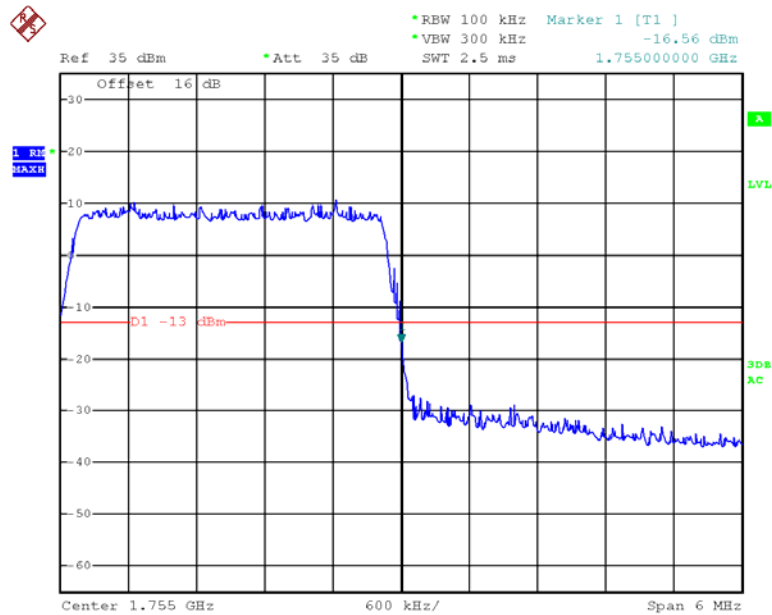


Date: 15.OCT.2015 22:05:05

16QAM -5M 1RB, Left Band Edge

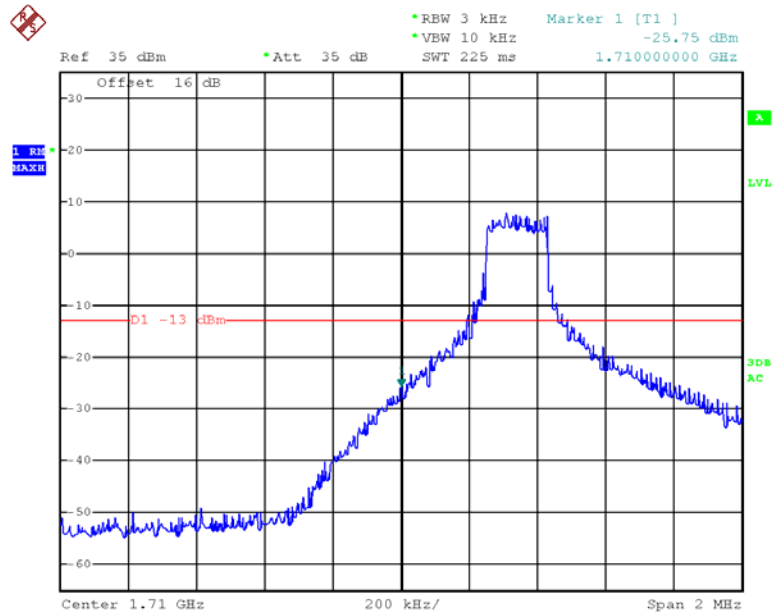


Date: 15.OCT.2015 22:20:34

16QAM -5M 1RB, Right Band Edge

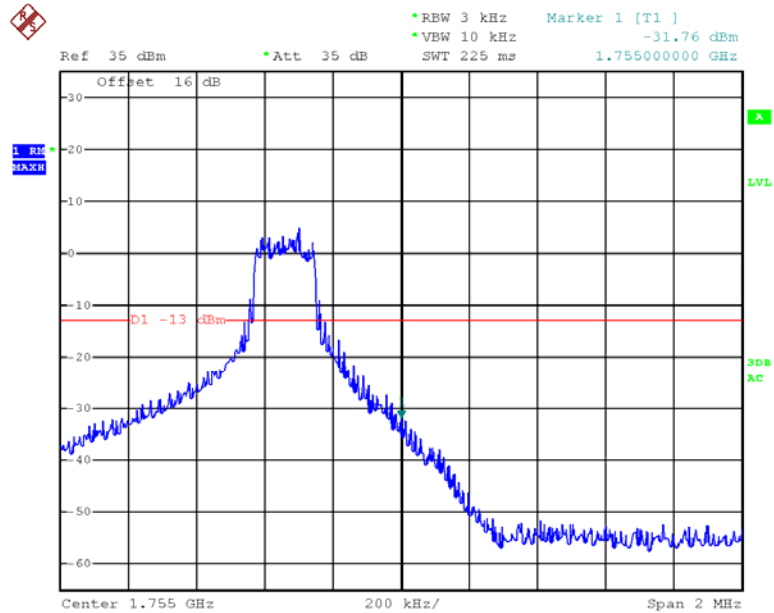


Date: 15.OCT.2015 22:18:48

16QAM -5M 25 RB, Left Band Edge

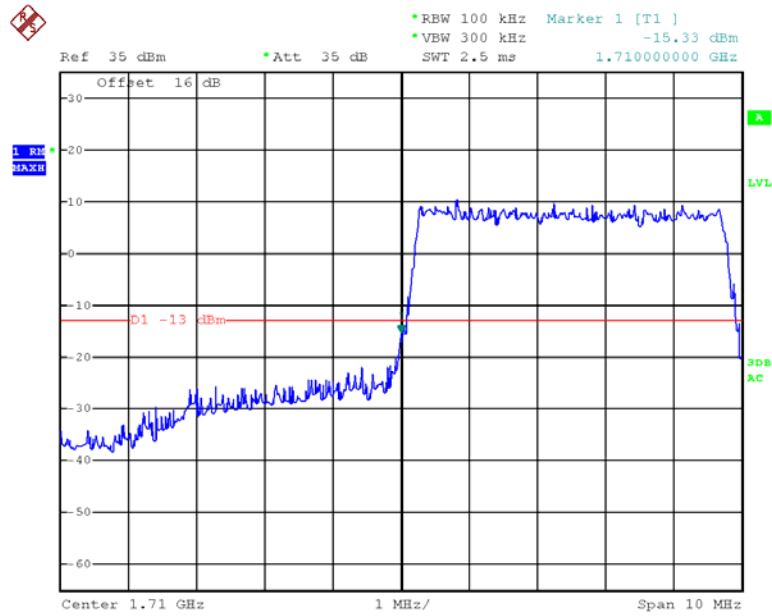


Date: 15.OCT.2015 22:13:24

16QAM -5M 25 RB, Right Band Edge

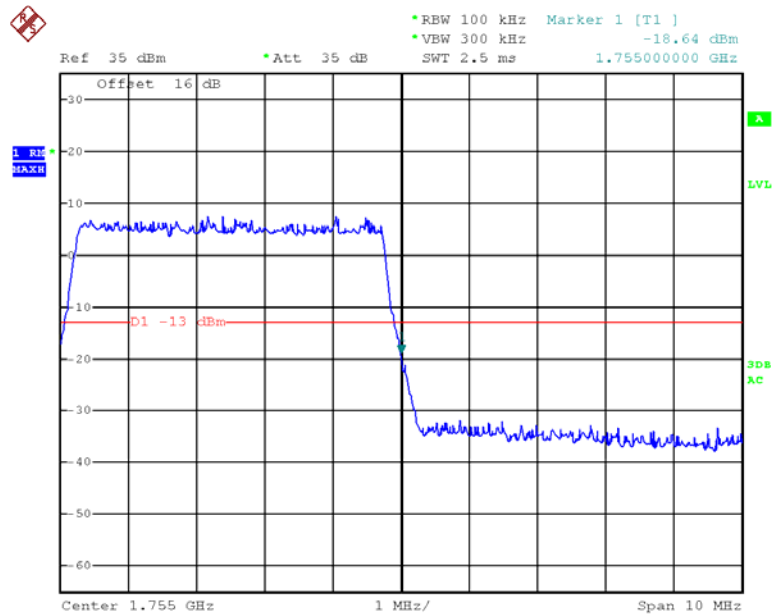


Date: 15.OCT.2015 22:16:11

16QAM -10M 1RB, Left Band Edge

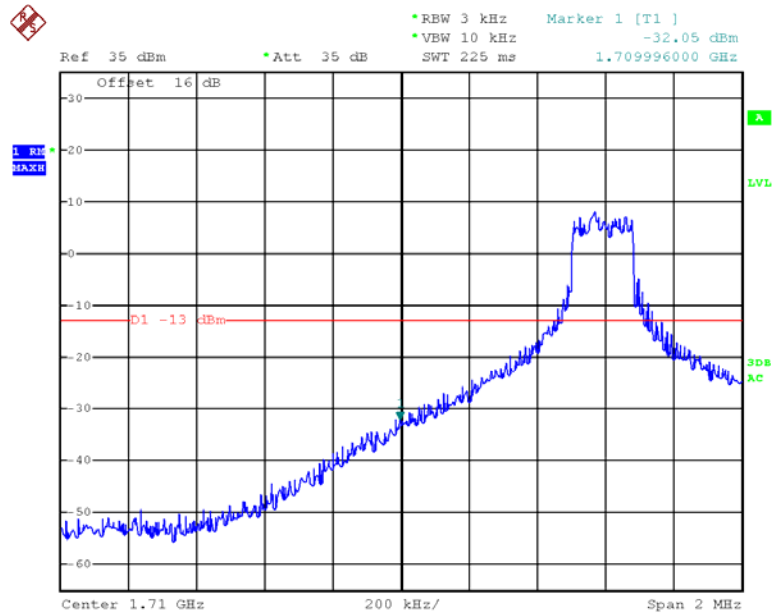


Date: 15.OCT.2015 22:27:49

16QAM -10M 1RB, Right Band Edge

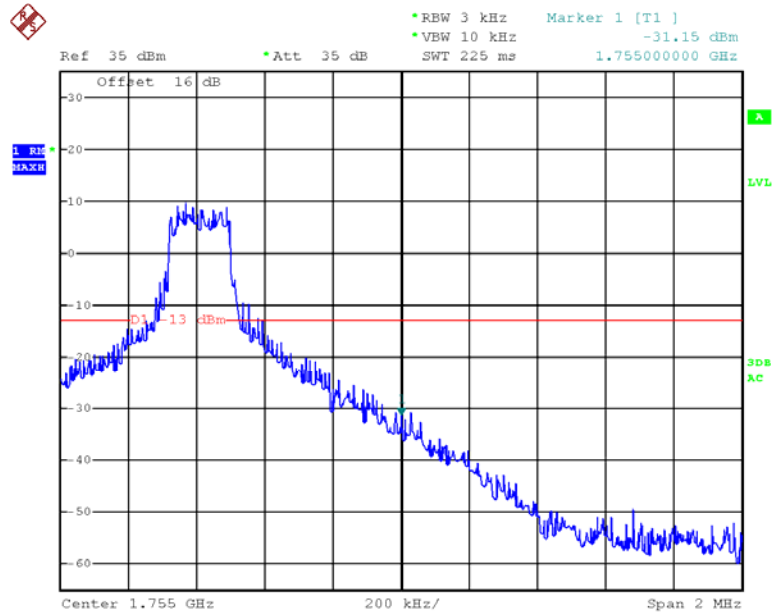


Date: 15.OCT.2015 22:31:53

16QAM -10M 50 RB, Left Band Edge

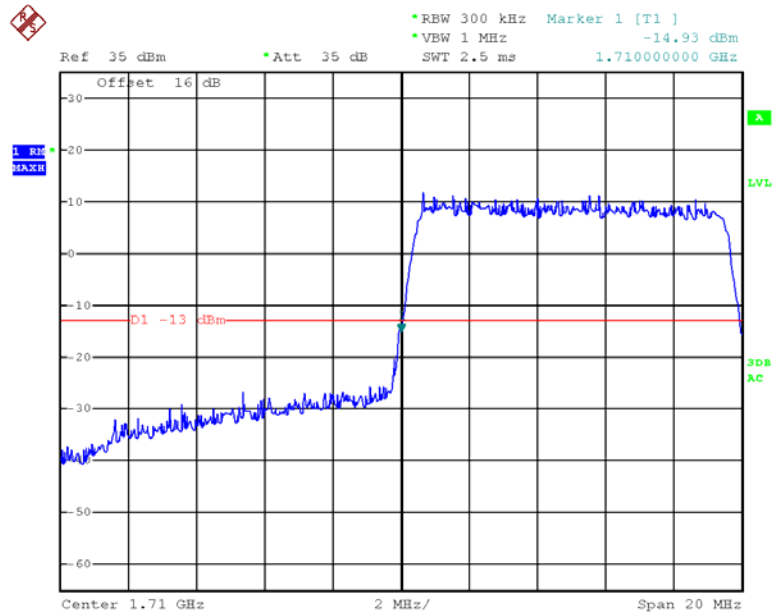


Date: 15.OCT.2015 22:41:52

16QAM -10M 50 RB, Right Band Edge

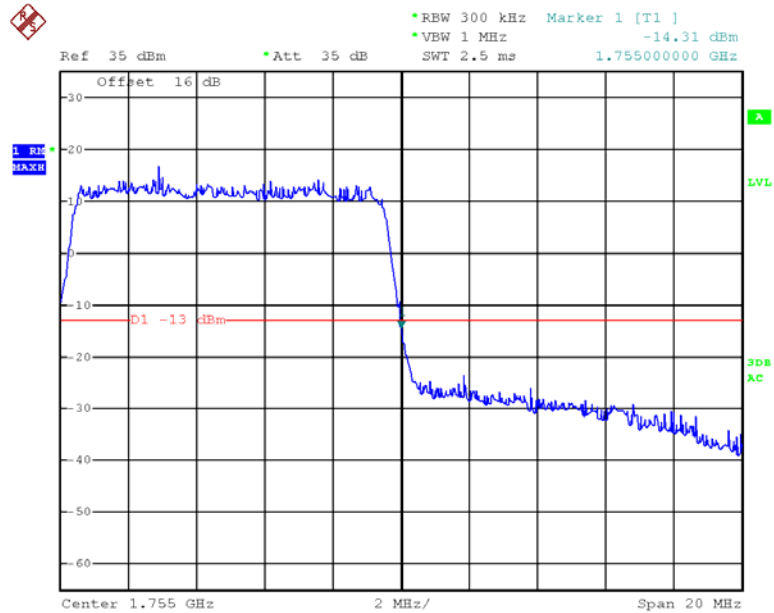


Date: 15.OCT.2015 22:33:44

16QAM -15M 1RB, Left Band Edge

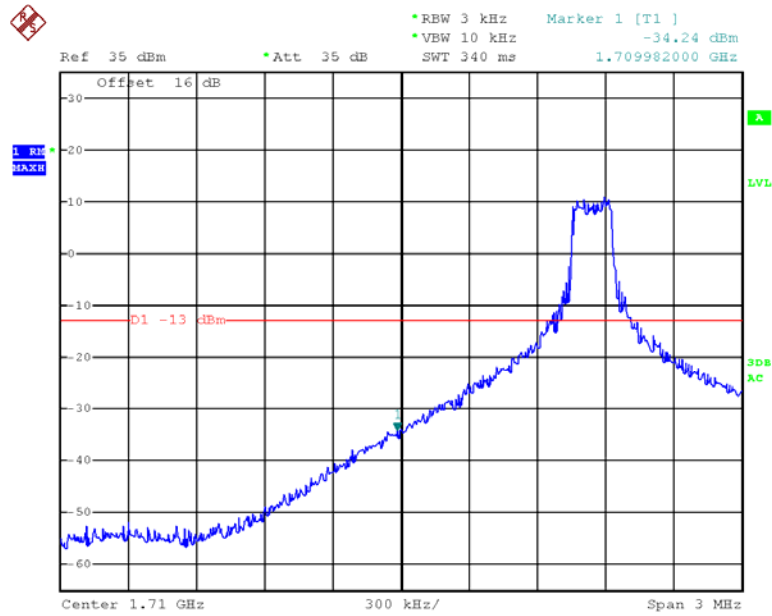


Date: 15.OCT.2015 22:59:21

16QAM -15M 1RB, Right Band Edge

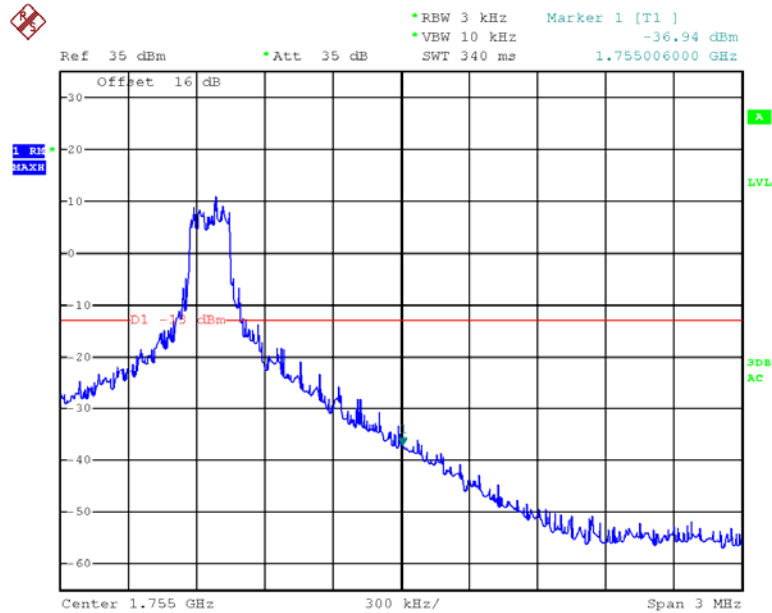


Date: 15.OCT.2015 22:56:44

16QAM -15M 75 RB, Left Band Edge

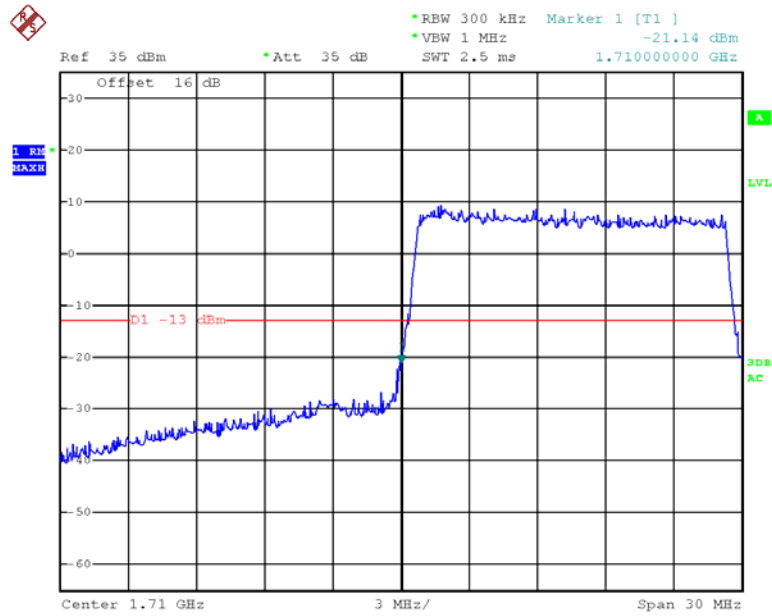


Date: 15.OCT.2015 22:49:24

16QAM -15M 75 RB, Right Band Edge

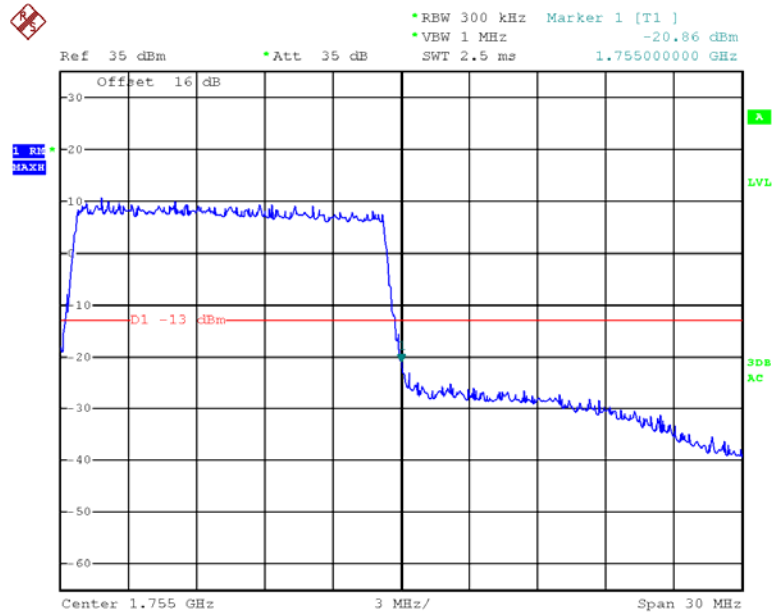


Date: 15.OCT.2015 22:52:17

16QAM -20M 1RB, Left Band Edge

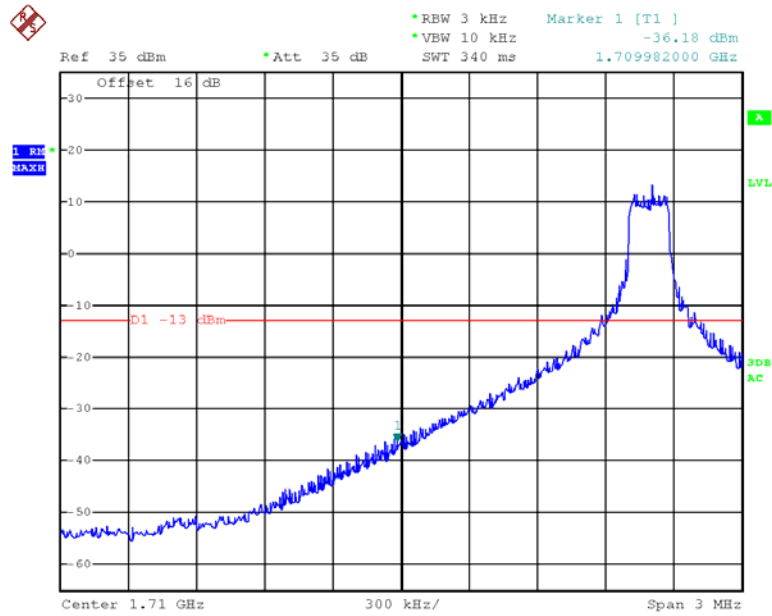


Date: 15.OCT.2015 23:03:11

16QAM -20M 1RB, Right Band Edge

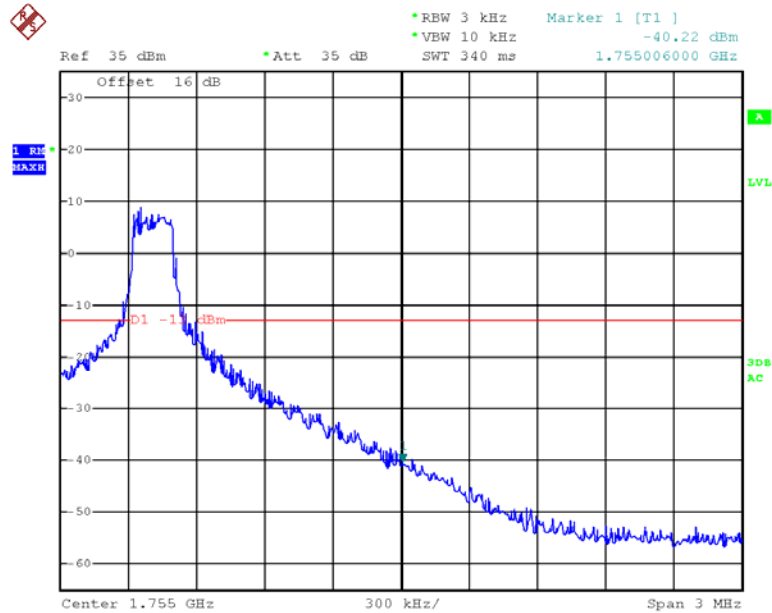


Date: 15.OCT.2015 23:05:44

16QAM -20M 100 RB, Left Band Edge

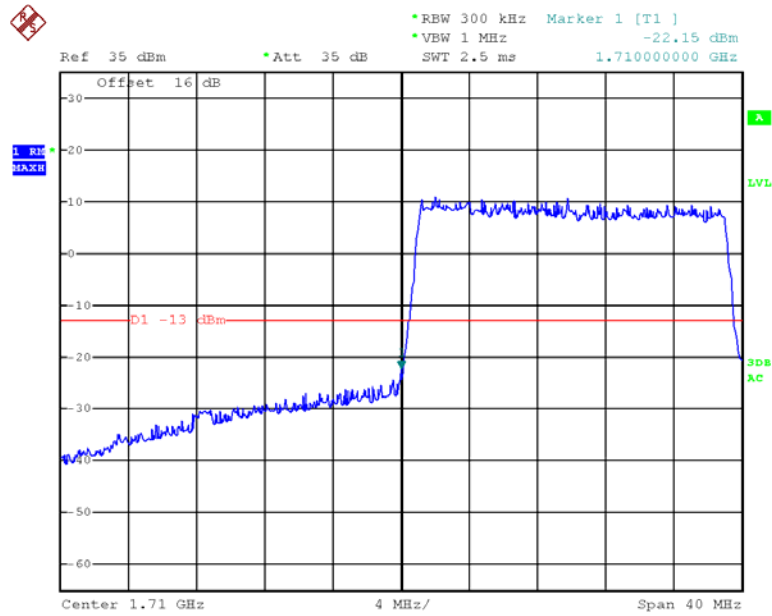

Date: 15.OCT.2015 23:10:29


16QAM-20M 100 RB, Right Band Edge

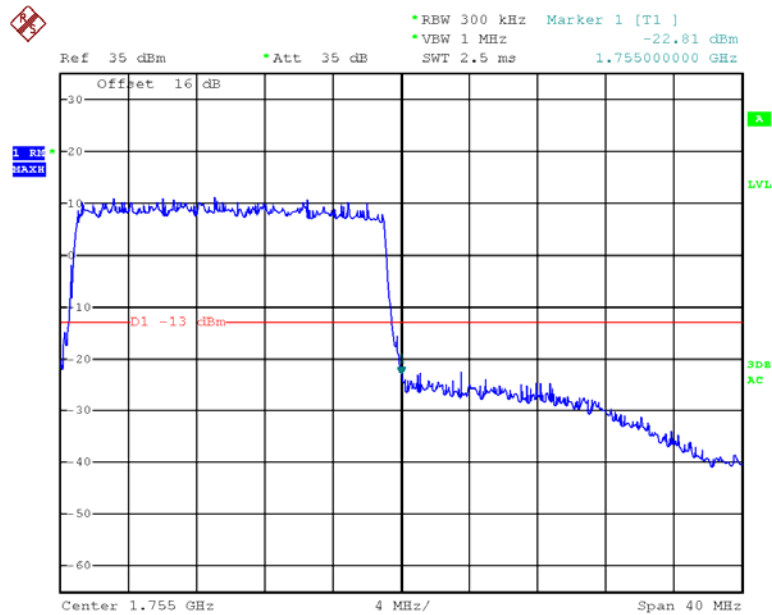

Date: 15.OCT.2015 23:08:53


LTE Band 7:

QPSK-5M 1RB, Left Band Edge

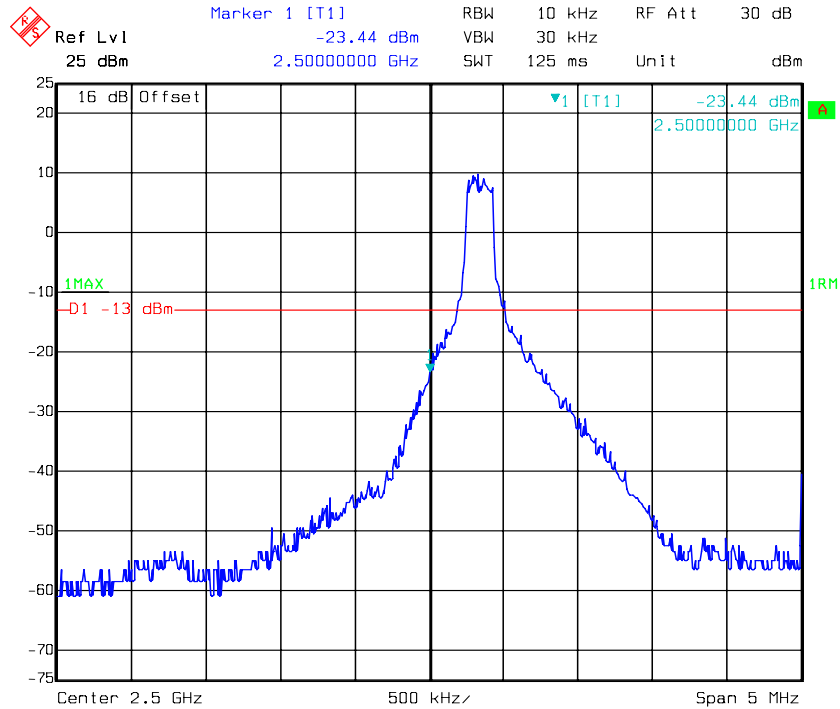


Date: 20.OCT.2015 22:36:07

QPSK-5M 1RB, Right Band Edge

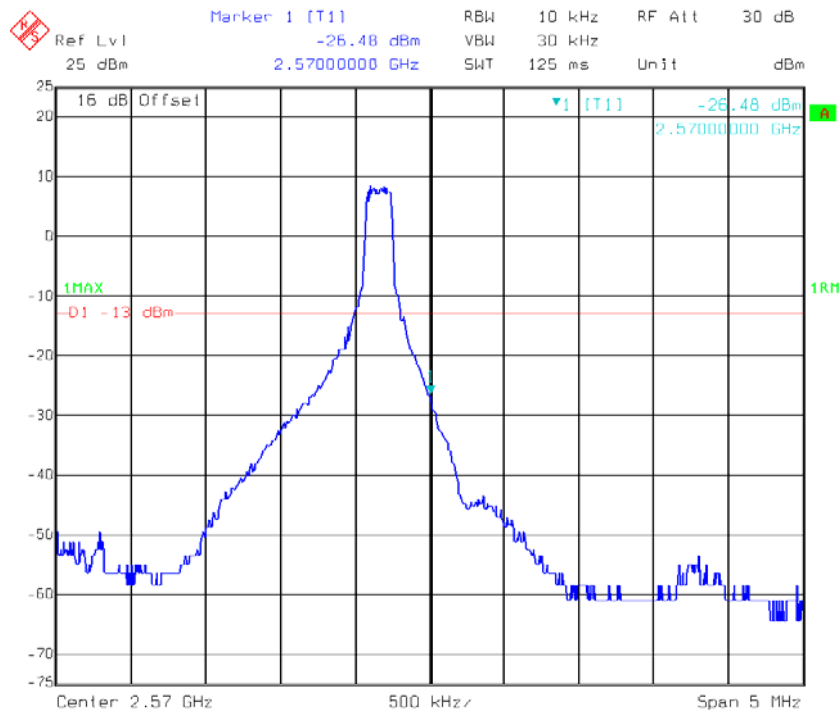


Date: 20.OCT.2015 22:38:02


QPSK-5M Full RB, Left Band Edge

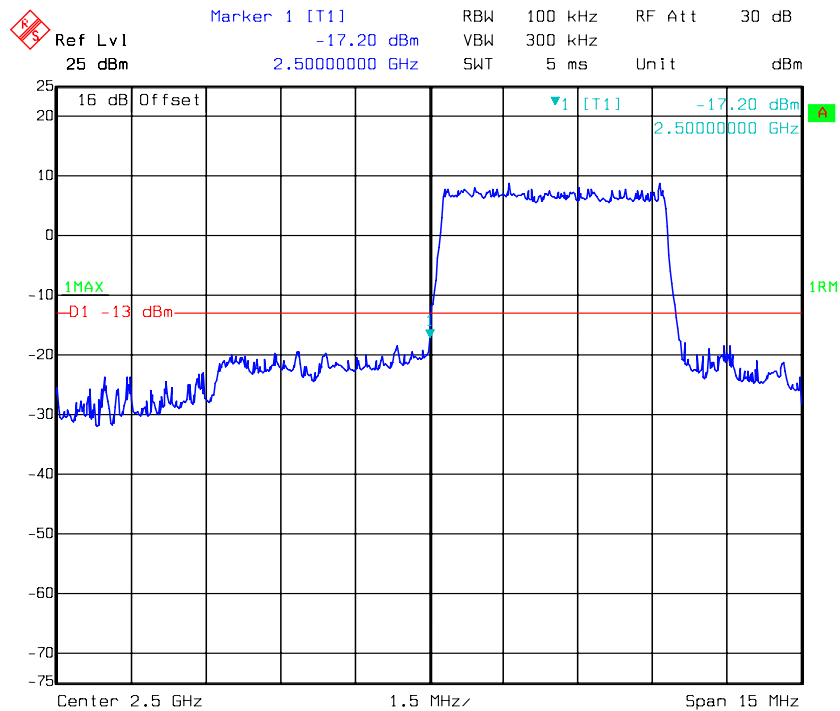


QPSK-5M Full RB, Right Band Edge

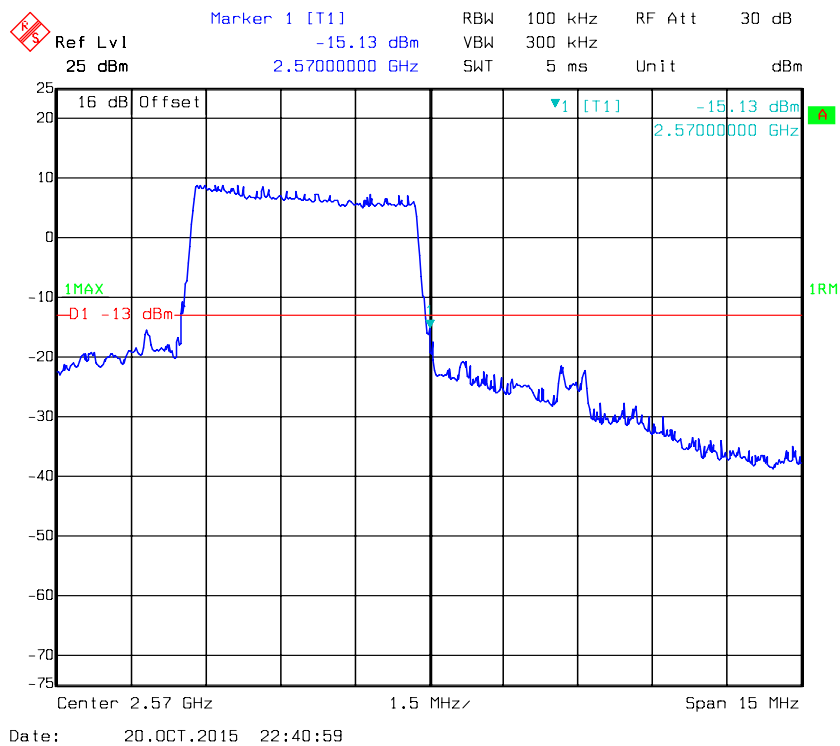


QPSK-10M 1RB, Left Band Edge

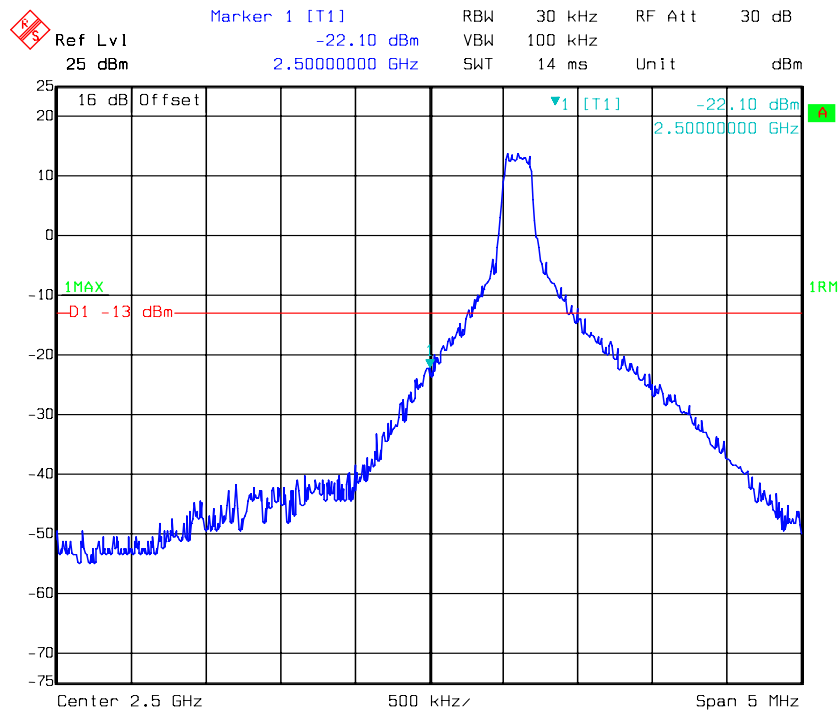


QPSK-10M 1RB, Right Band Edge

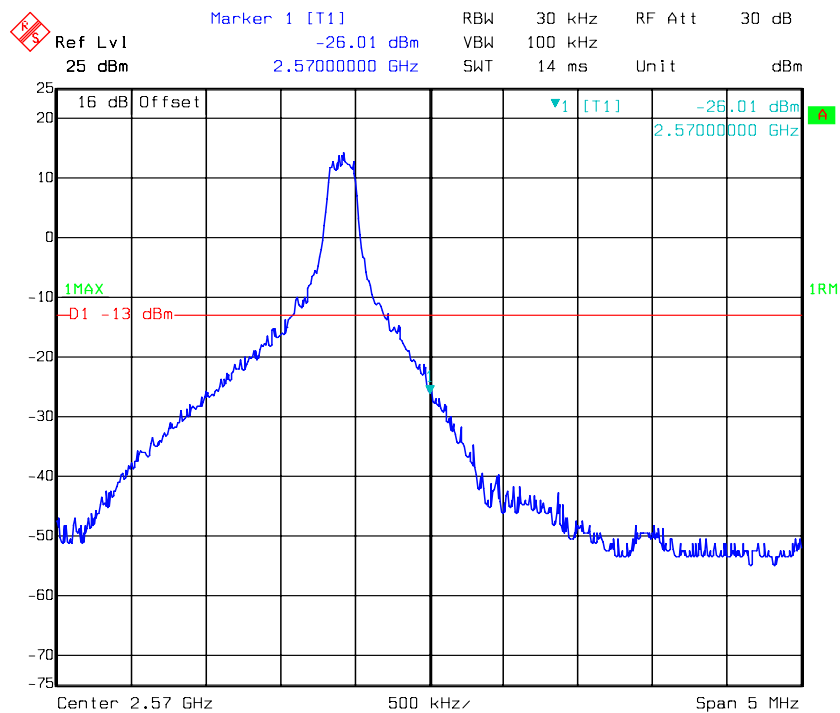


QPSK-10M Full RB, Left Band Edge

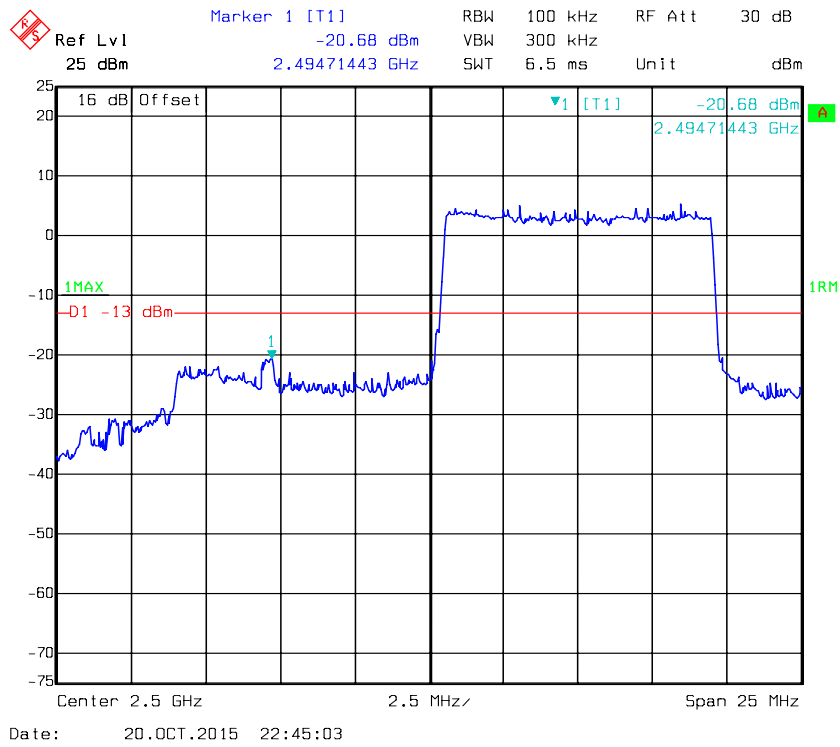


QPSK-10M Full RB, Right Band Edge

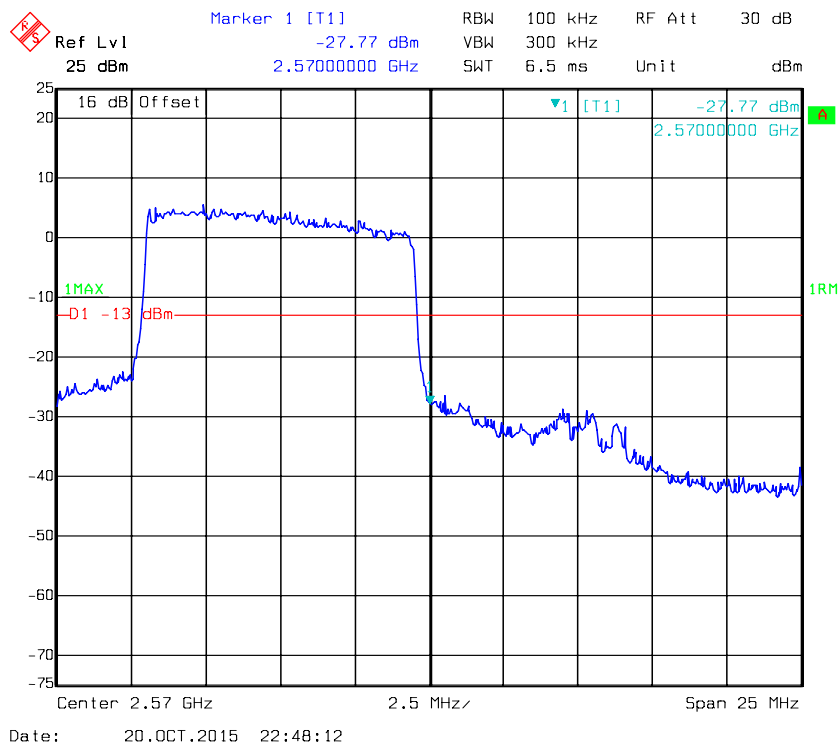

QPSK-15M 1RB, Left Band Edge

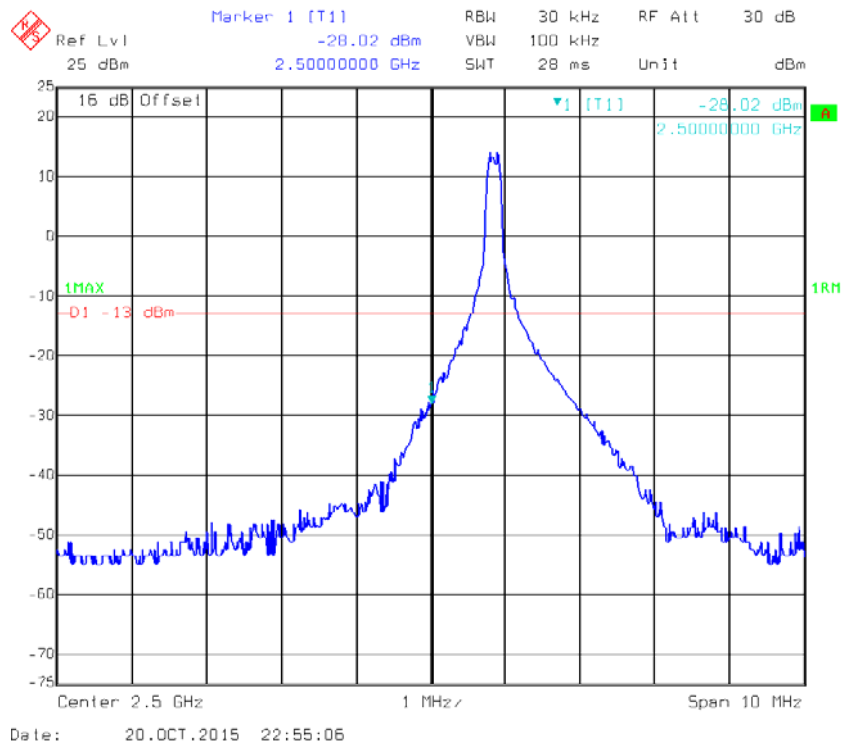

QPSK-15M 1RB, Right Band Edge

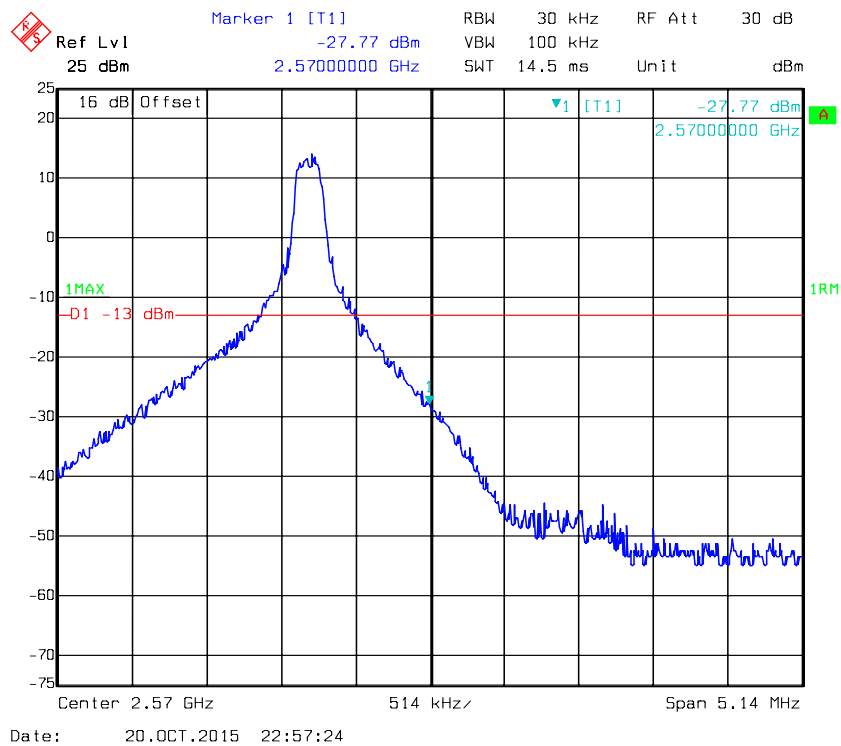

Ref Lvl 25 dBm

Marker 1 [T1] -19.32 dBm

2.49800100 GHz

RBW 200 kHz RF Att 30 dB

VBW 500 kHz

SWT 5 ms Unit dBm

16 dB Offset

1MAX

-D1 -13 dBm

1

1RM

Center 2.5 GHz

3.5 MHz

Span 35 MHz

Date: 20.OCT.2015 23:01:15

Ref Lvl 25 dBm

Marker 1 [T1] -24.59 dBm

RBW 200 kHz

VBW 500 kHz

RF Att 30 dB

Unit dBm

16 dB Offset

1MAX

-D1 -13 dBm


1RM

Center 2.57 GHz


Span 35 MHz

Date: 20.OCT.2015 22:59:31


QPSK-20M 1RB, Left Band Edge

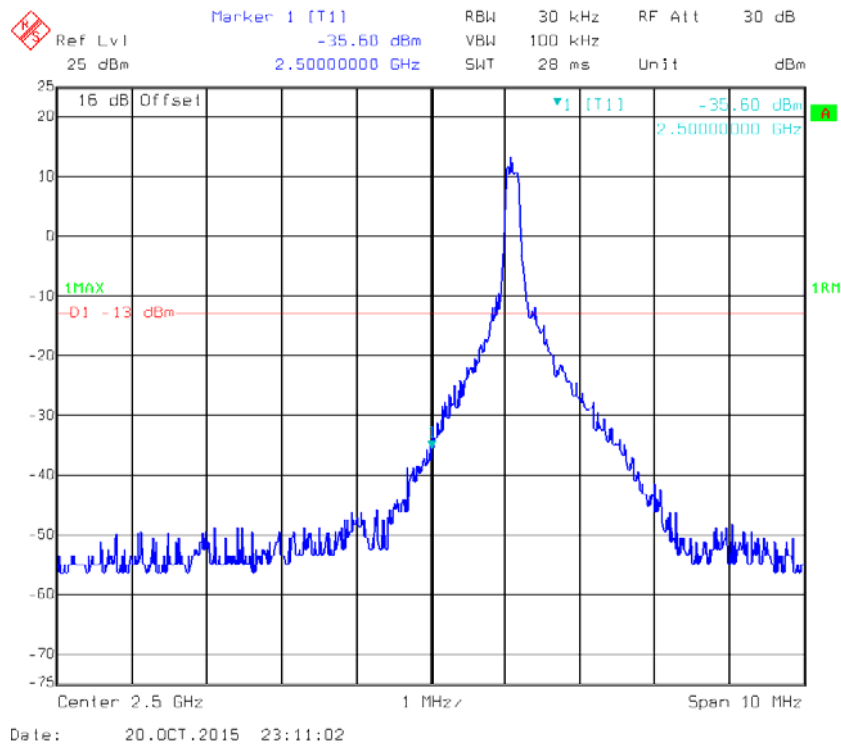


QPSK-20M 1RB, Right Band Edge


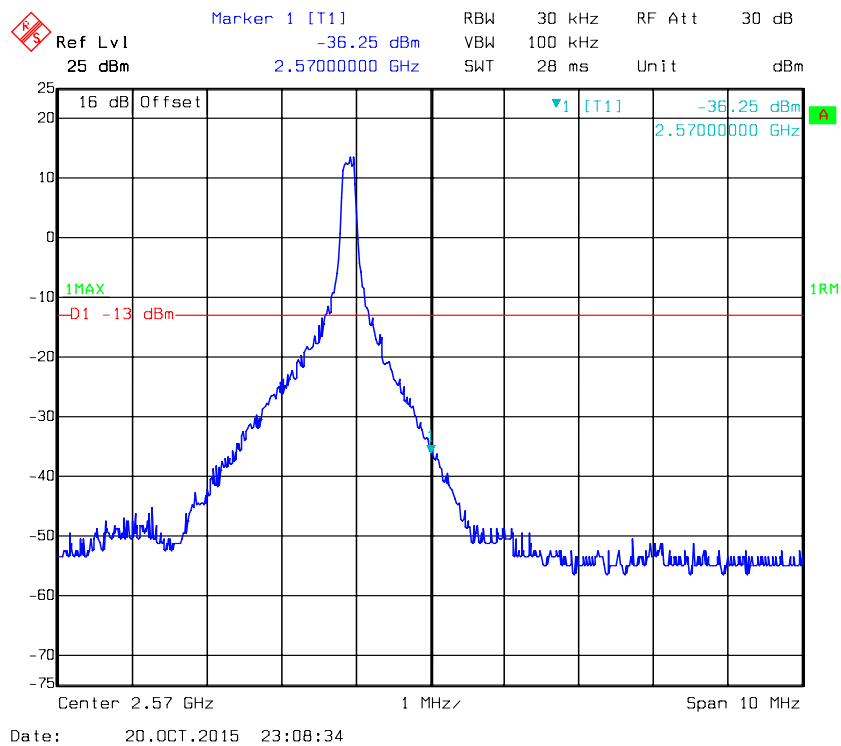



QPSK-20M Full RB, Left Band Edge

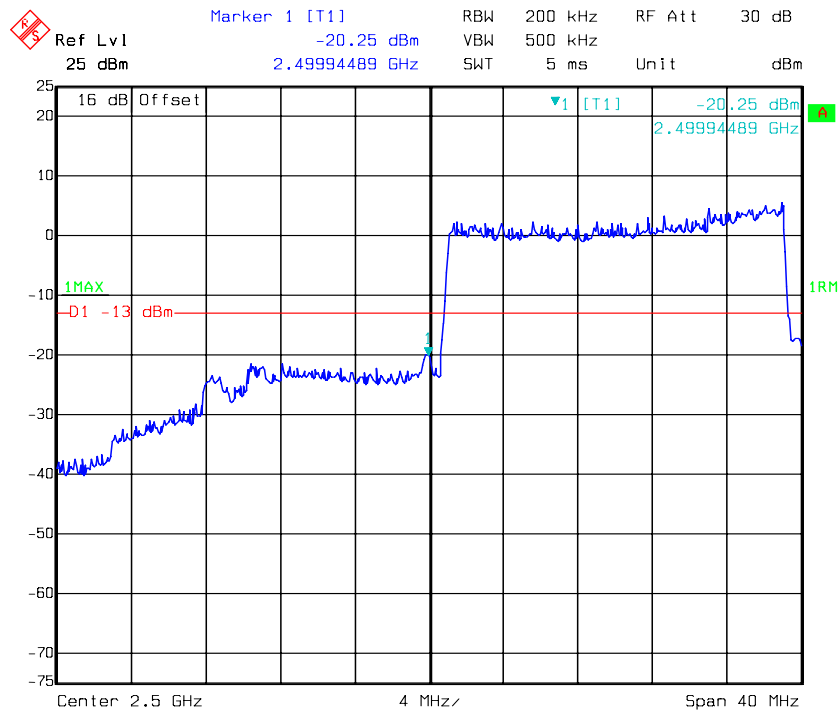


QPSK-20M Full RB, Right Band Edge

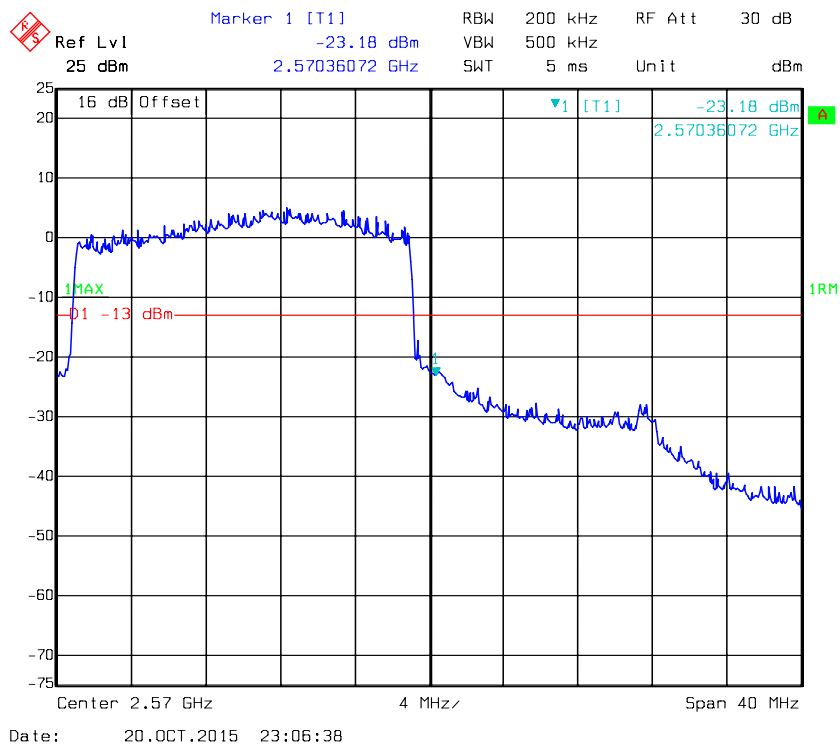

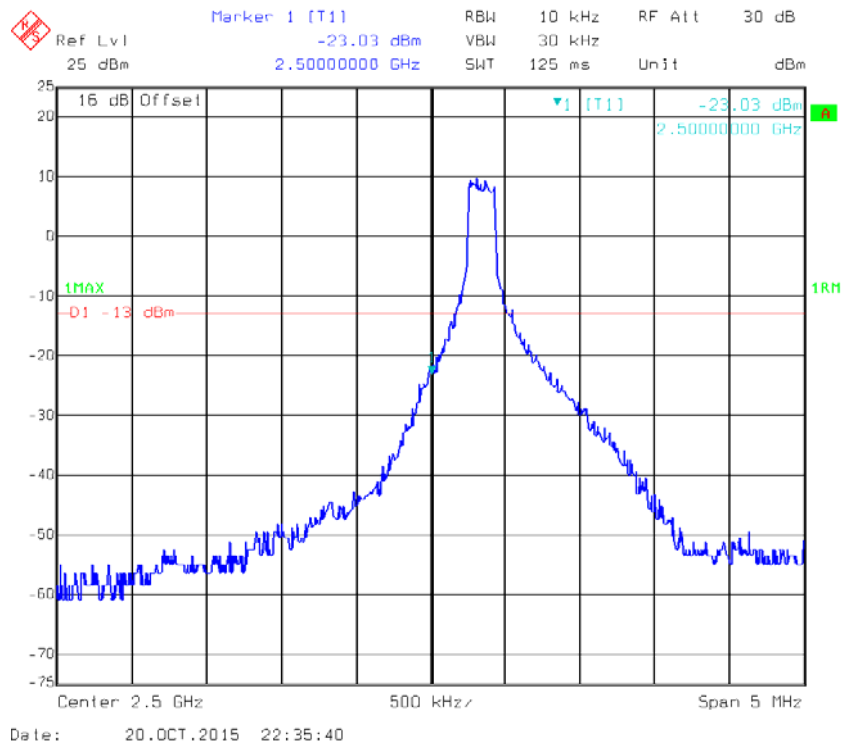
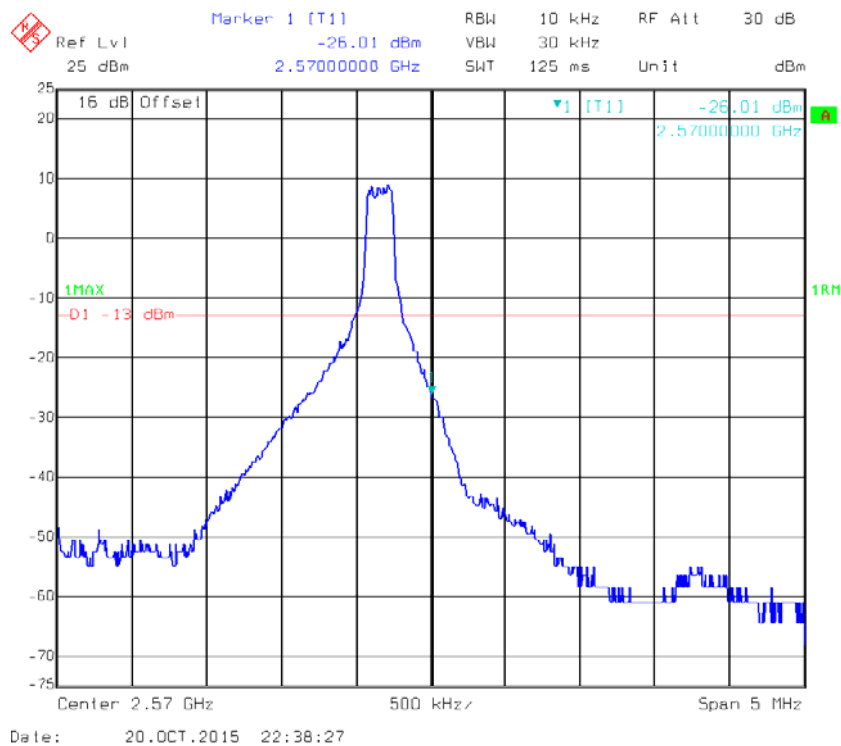
16QAM -5M 1RB, Left Band Edge**16QAM -5M 1RB, Right Band Edge**

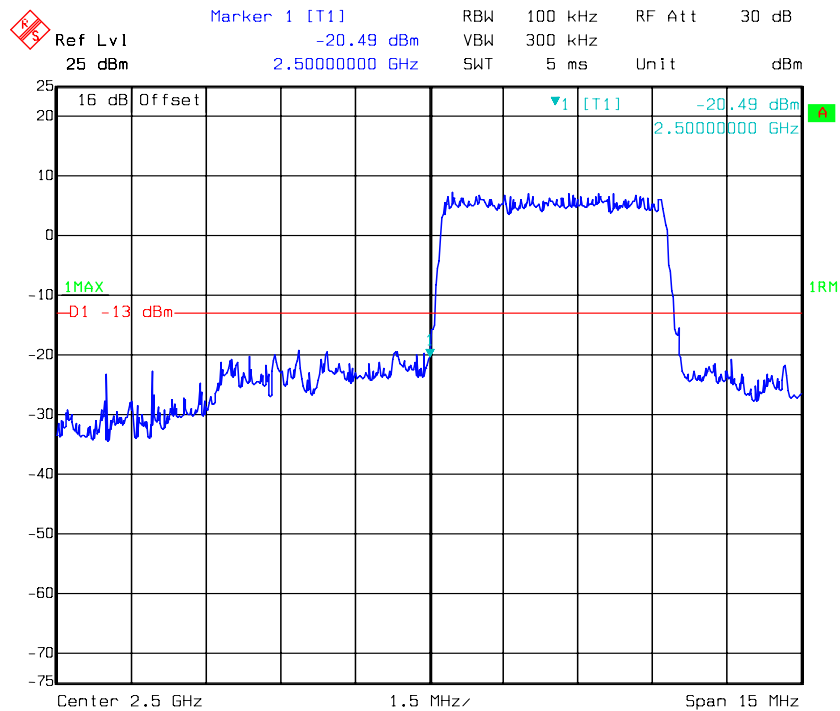16QAM -5M Full RB, Left Band Edge


Date: 20.OCT.2015 22:42:31

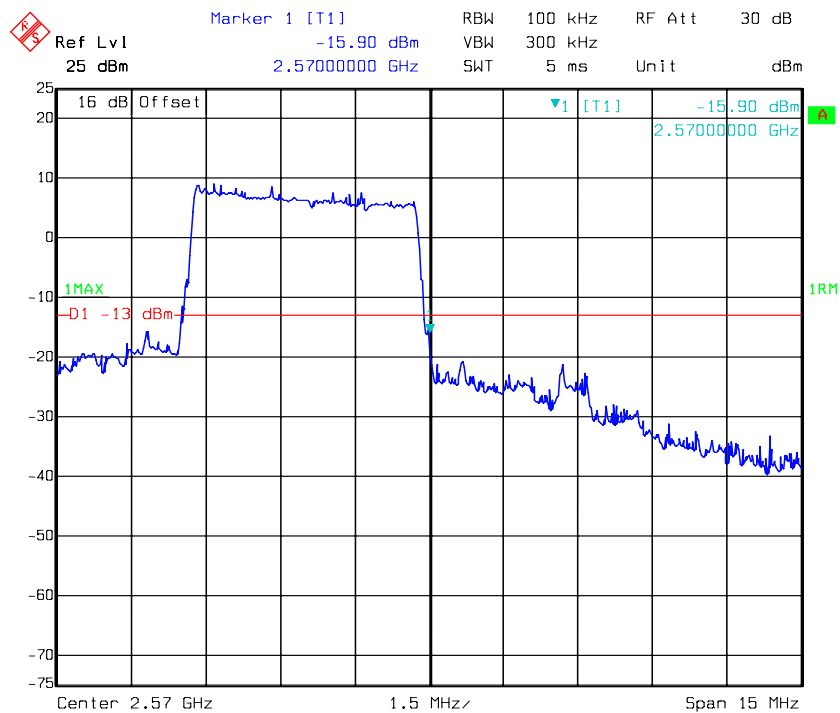16QAM -5M Full RB, Right Band Edge


Date: 20.OCT.2015 22:40:32

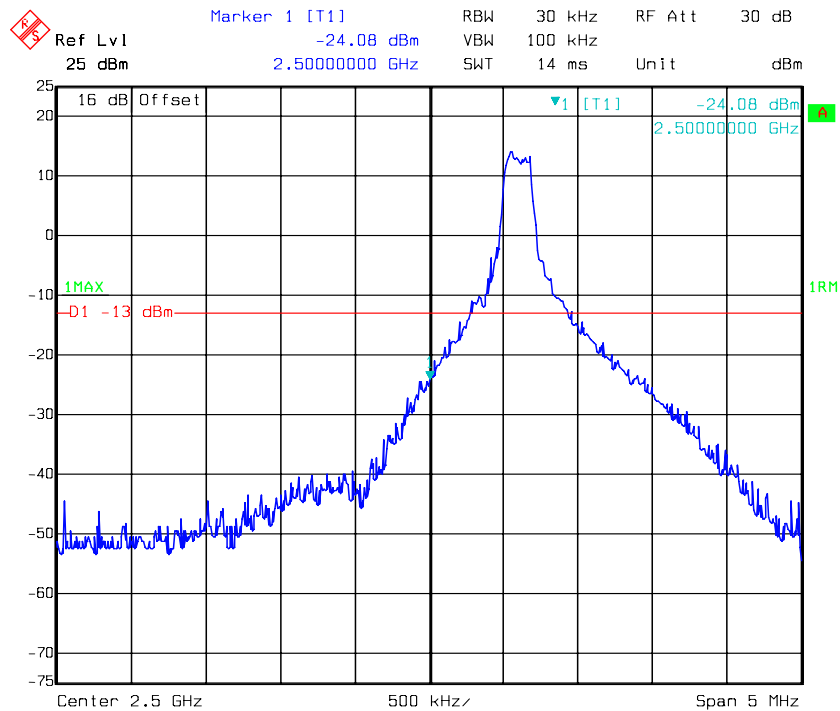
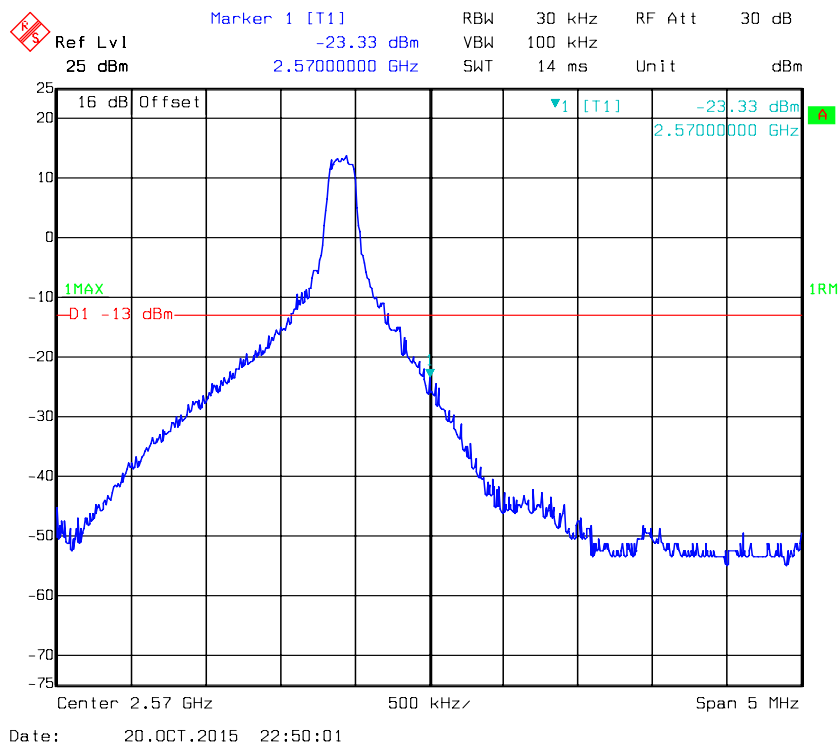
16QAM -10M 1RB, Left Band Edge**16QAM -10M 1RB, Right Band Edge**

16QAM -10M Full RB, Left Band Edge

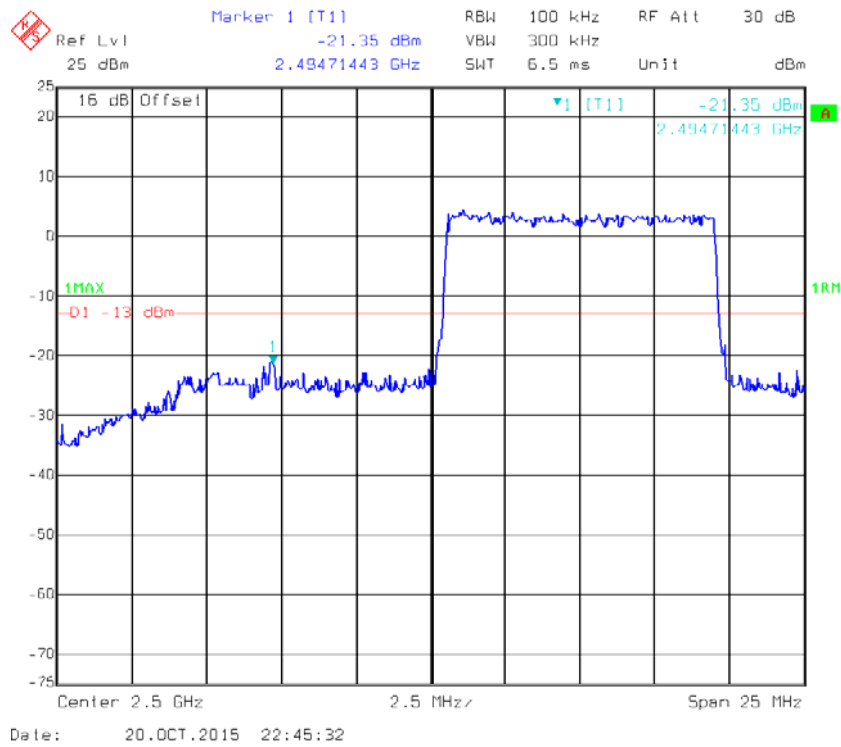


16QAM -10M Full RB, Right Band Edge

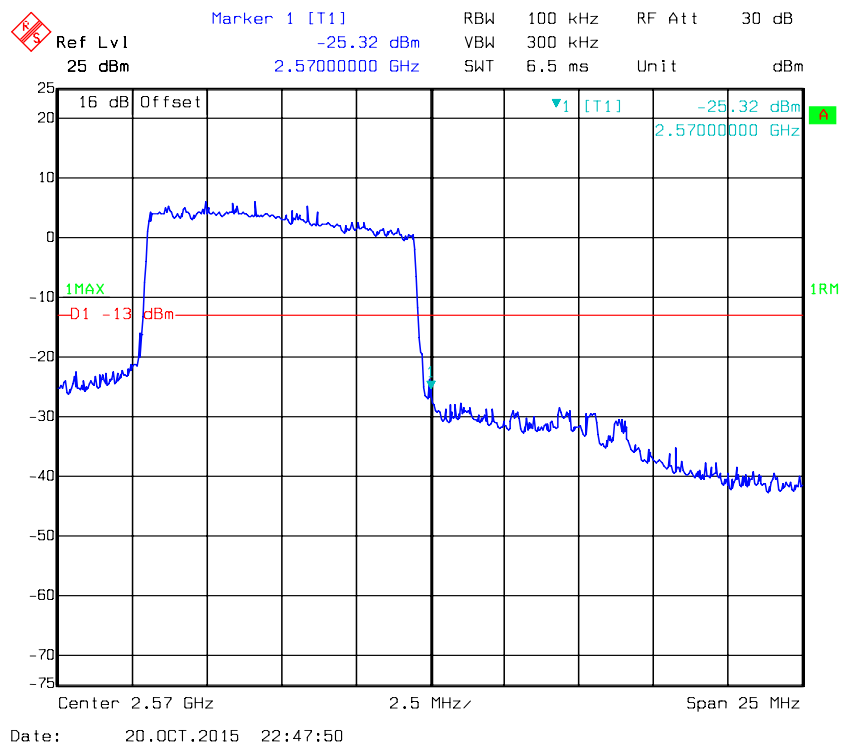

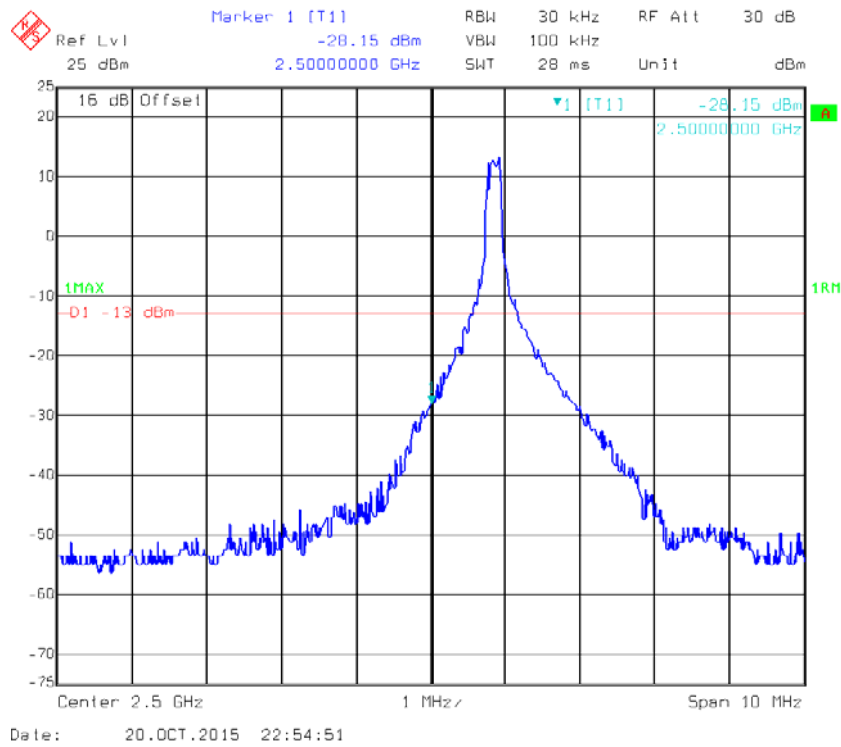
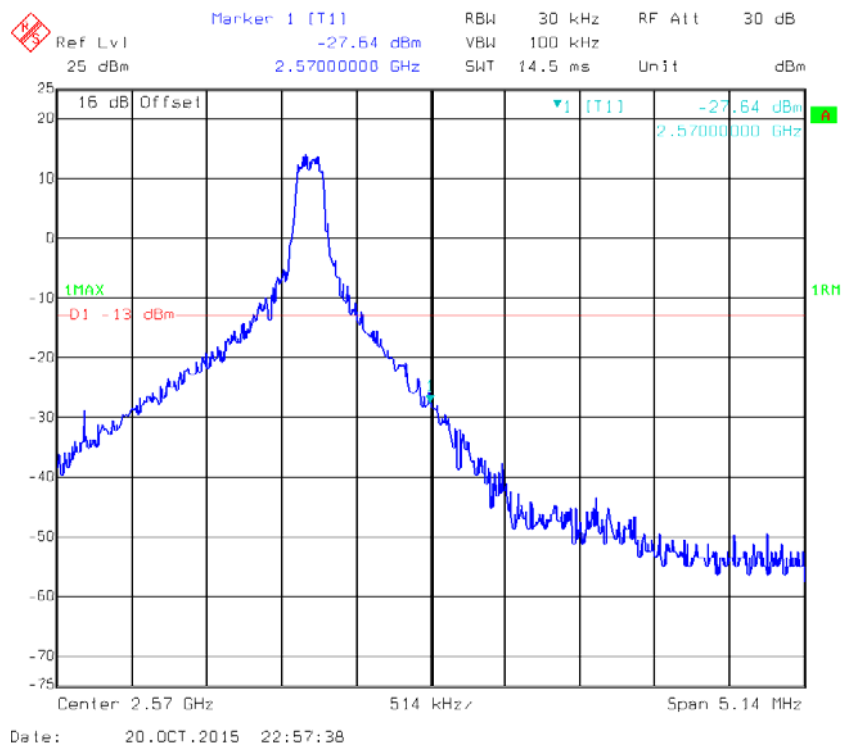
16QAM -15M 1RB, Left Band Edge**16QAM -15M 1RB, Right Band Edge**

16QAM -15M Full RB, Left Band Edge

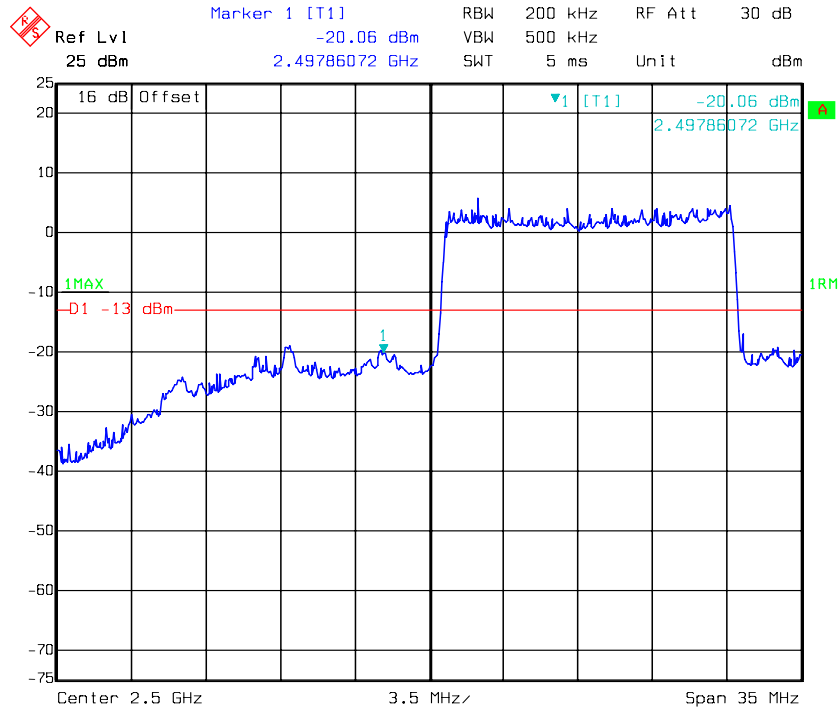


16QAM -15M Full RB, Right Band Edge

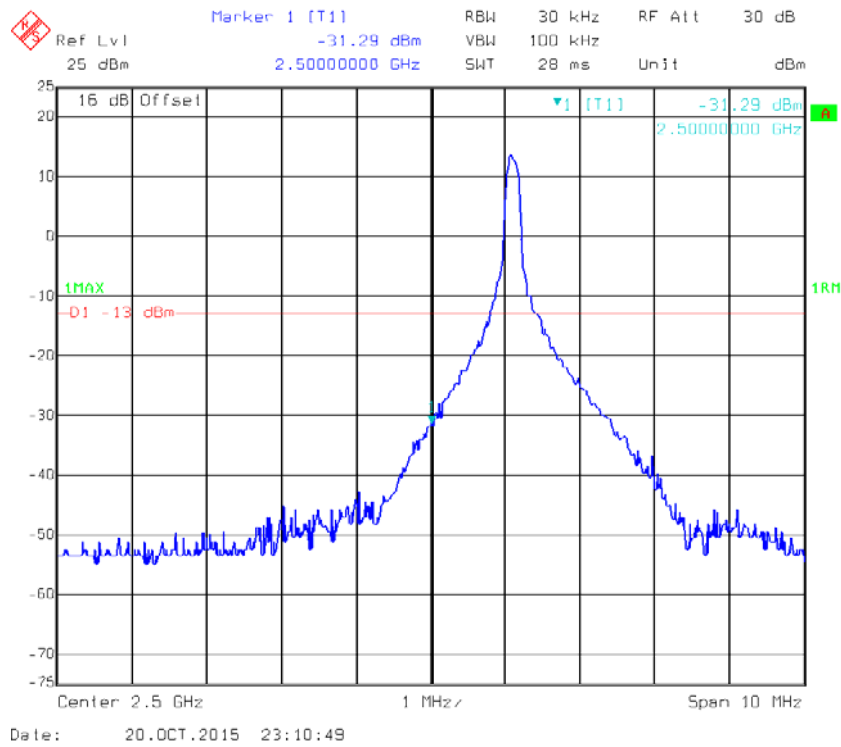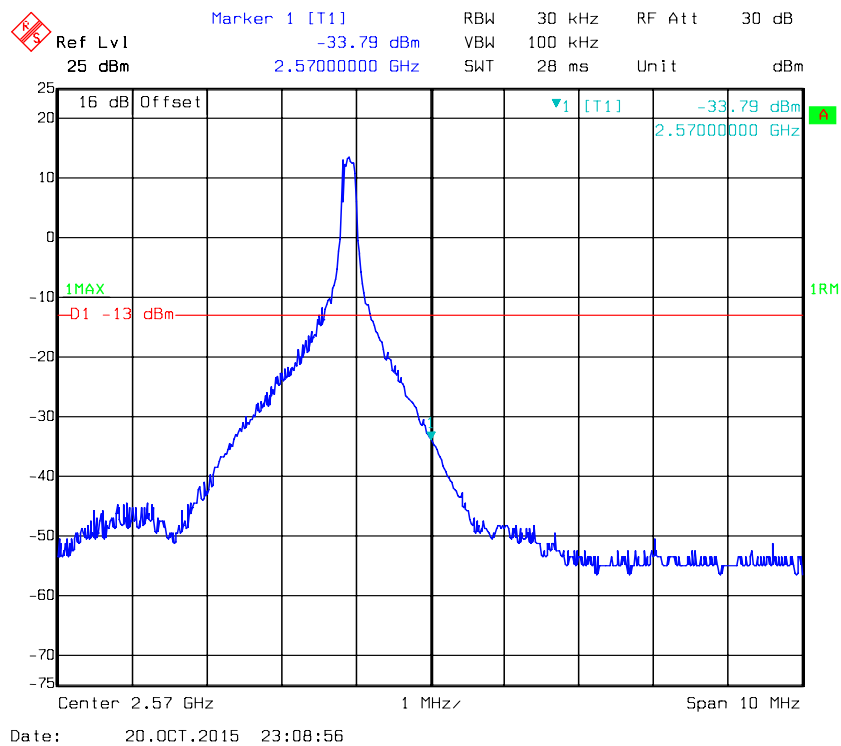

16QAM -20M 1RB, Left Band Edge**16QAM -20M 1RB, Right Band Edge**

16QAM -20M Full RB, Left Band Edge

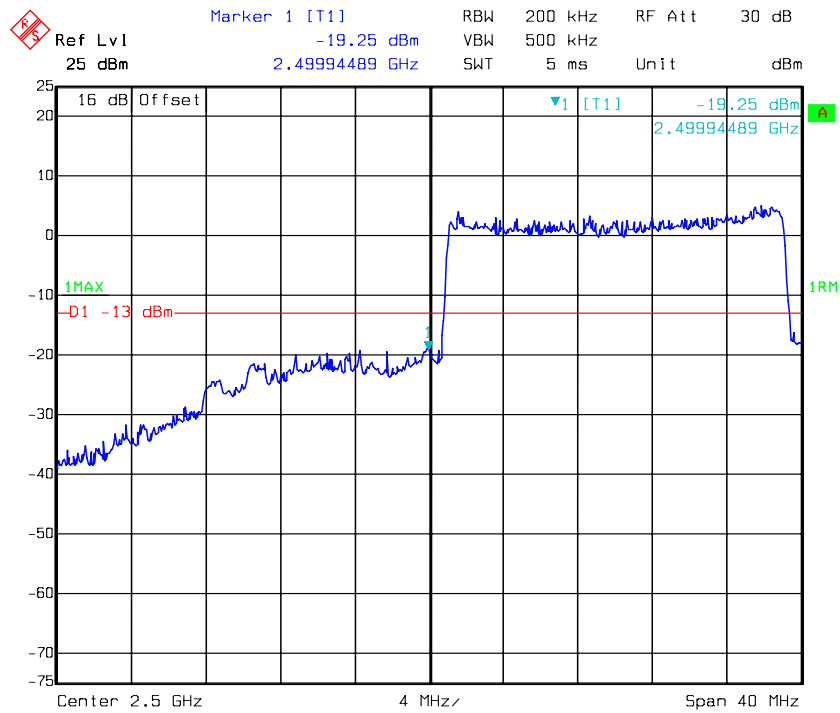

Date: 20.OCT.2015 23:03:57

16QAM-20M Full RB, Right Band Edge



Date: 20.OCT.2015 23:06:16

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235, §27.54

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

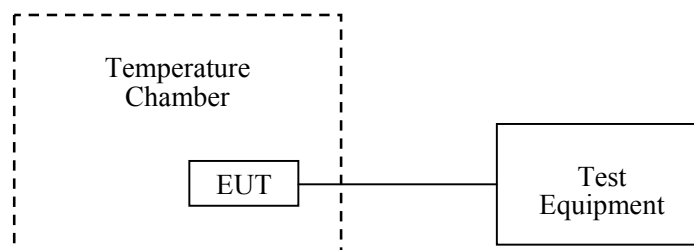

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-3	2015-09-10	2016-09-09
R&S	Universal Radio Communication Tester	CMU200	109 038	2015-05-09	2016-05-09
R&S	Wideband Radio Communication Tester	CMW500	106891	2014-12-19	2015-12-19

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	52 %
ATM Pressure:	100.4 kPa

The testing was performed by Dean Liu from 2015-10-20.

Cellular Band (Part 22H)

GMSK, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.8	-20	-0.024	2.5
-20	3.8	-16	-0.019	2.5
-10	3.8	-17	-0.020	2.5
0	3.8	-15	-0.018	2.5
10	3.8	-12	-0.014	2.5
20	3.8	-11	-0.013	2.5
30	3.8	-16	-0.019	2.5
40	3.8	-17	-0.020	2.5
50	3.8	-18	-0.022	2.5
25	3.6	-17	-0.020	2.5
25	4.3	-18	-0.022	2.5

EDGE, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.8	-25	-0.030	2.5
-20	3.8	-22	-0.026	2.5
-10	3.8	-19	-0.023	2.5
0	3.8	-20	-0.024	2.5
10	3.8	-18	-0.022	2.5
20	3.8	-17	-0.020	2.5
30	3.8	-19	-0.023	2.5
40	3.8	-20	-0.024	2.5
50	3.8	-21	-0.025	2.5
25	3.6	-18	-0.022	2.5
25	4.3	-22	-0.026	2.5

WCDMA Band V: Re199

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.8	-31	-0.037	2.5
-20	3.8	-22	-0.026	2.5
-10	3.8	-13	-0.016	2.5
0	3.8	-17	-0.020	2.5
10	3.8	-17	-0.020	2.5
20	3.8	-20	-0.024	2.5
30	3.8	-25	-0.030	2.5
40	3.8	-30	-0.036	2.5
50	3.8	-30	-0.036	2.5
25	3.6	-17	-0.020	2.5
25	4.3	-32	-0.038	2.5

WCDMA Band V: HSDPA

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.8	-28	-0.033	2.5
-20	3.8	-22	-0.026	2.5
-10	3.8	-30	-0.036	2.5
0	3.8	-24	-0.029	2.5
10	3.8	-17	-0.020	2.5
20	3.8	-20	-0.024	2.5
30	3.8	-23	-0.027	2.5
40	3.8	-25	-0.030	2.5
50	3.8	-29	-0.035	2.5
25	3.6	-28	-0.033	2.5
25	4.3	-21	-0.025	2.5

WCDMA Band V: HSUPA

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.8	-22	-0.026	2.5
-20	3.8	-21	-0.025	2.5
-10	3.8	-19	-0.023	2.5
0	3.8	-14	-0.017	2.5
10	3.8	-25	-0.030	2.5
20	3.8	-12	-0.014	2.5
30	3.8	-15	-0.018	2.5
40	3.8	-14	-0.017	2.5
50	3.8	-22	-0.026	2.5
25	3.6	-15	-0.018	2.5
25	4.3	-20	-0.024	2.5

PCS Band (Part 24E)

GMSK, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V_{DC}	Hz	ppm	
-30	3.8	-21	-0.011	Compliance
-20	3.8	-19	-0.010	Compliance
-10	3.8	-17	-0.009	Compliance
0	3.8	-18	-0.010	Compliance
10	3.8	-16	-0.009	Compliance
20	3.8	-15	-0.008	Compliance
30	3.8	-17	-0.009	Compliance
40	3.8	-21	-0.011	Compliance
50	3.8	-20	-0.011	Compliance
25	3.6	-23	-0.012	Compliance
25	4.3	-18	-0.010	Compliance

EDGE, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V_{DC}	Hz	ppm	
-30	3.8	-24	-0.013	Compliance
-20	3.8	-28	-0.015	Compliance
-10	3.8	-22	-0.012	Compliance
0	3.8	-26	-0.014	Compliance
10	3.8	-23	-0.012	Compliance
20	3.8	-18	-0.010	Compliance
30	3.8	-25	-0.013	Compliance
40	3.8	-26	-0.014	Compliance
50	3.8	-22	-0.012	Compliance
25	3.6	-24	-0.013	Compliance
25	4.3	-21	-0.011	Compliance

WCDMA Band II: Re199

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-24	-0.013	Compliance
-20	3.8	-25	-0.013	Compliance
-10	3.8	-21	-0.011	Compliance
0	3.8	-24	-0.013	Compliance
10	3.8	-26	-0.014	Compliance
20	3.8	-18	-0.010	Compliance
30	3.8	-19	-0.010	Compliance
40	3.8	-30	-0.016	Compliance
50	3.8	-26	-0.014	Compliance
25	3.6	-25	-0.013	Compliance
25	4.3	-19	-0.010	Compliance

WCDMA Band II: HSDPA

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-33	-0.018	Compliance
-20	3.8	-31	-0.016	Compliance
-10	3.8	-23	-0.012	Compliance
0	3.8	-17	-0.009	Compliance
10	3.8	-26	-0.014	Compliance
20	3.8	-20	-0.011	Compliance
30	3.8	-15	-0.008	Compliance
40	3.8	-14	-0.007	Compliance
50	3.8	-27	-0.014	Compliance
25	3.6	-14	-0.007	Compliance
25	4.3	-22	-0.012	Compliance

WCDMA Band II: HSUPA

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-30	-0.016	Compliance
-20	3.8	-19	-0.010	Compliance
-10	3.8	-26	-0.014	Compliance
0	3.8	-13	-0.007	Compliance
10	3.8	-15	-0.008	Compliance
20	3.8	-13	-0.007	Compliance
30	3.8	-23	-0.012	Compliance
40	3.8	-15	-0.008	Compliance
50	3.8	-11	-0.006	Compliance
25	3.6	-25	-0.013	Compliance
25	4.3	-14	-0.007	Compliance

LTE Band 4:

QPSK, Channel Bandwidth:10MHz Middle Channel, $f_c = 1732.5$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-6.75	-0.0039	Compliance
-20	3.8	-5.11	-0.0029	Compliance
-10	3.8	-5.45	-0.0031	Compliance
0	3.8	-5.13	-0.0030	Compliance
10	3.8	-5.06	-0.0029	Compliance
20	3.8	-5.14	-0.0030	Compliance
30	3.8	-5.66	-0.0033	Compliance
40	3.8	-6.12	-0.0035	Compliance
50	3.8	-5.61	-0.0032	Compliance
25	3.6	-5.89	-0.0034	Compliance
25	4.3	-5.75	-0.0033	Compliance

16QAM, Channel Bandwidth:10MHz Middle Channel, $f_c = 1732.5$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-6.14	-0.0035	Compliance
-20	3.8	-5.52	-0.0032	Compliance
-10	3.8	-5.06	-0.0029	Compliance
0	3.8	-5.37	-0.0031	Compliance
10	3.8	-6.36	-0.0037	Compliance
20	3.8	-5.38	-0.0031	Compliance
30	3.8	-5.16	-0.0030	Compliance
40	3.8	-5.69	-0.0033	Compliance
50	3.8	-5.53	-0.0032	Compliance
25	3.6	-6.01	-0.0035	Compliance
25	4.3	-5.25	-0.0030	Compliance

LTE Band 7:

QPSK, Channel Bandwidth:10MHz Middle Channel, $f_c = 2535$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V_{DC}	Hz	ppm	
-30	3.8	-6.40	-0.0025	Compliance
-20	3.8	-5.04	-0.0020	Compliance
-10	3.8	-6.03	-0.0024	Compliance
0	3.8	-6.82	-0.0027	Compliance
10	3.8	-5.29	-0.0021	Compliance
20	3.8	-5.57	-0.0022	Compliance
30	3.8	-5.83	-0.0023	Compliance
40	3.8	-6.28	-0.0025	Compliance
50	3.8	-7.73	-0.0030	Compliance
25	3.6	-5.7	-0.0022	Compliance
25	4.3	-6.34	-0.0025	Compliance

16QAM, Channel Bandwidth:10MHz Middle Channel, $f_c = 2535$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V_{DC}	Hz	ppm	
-30	3.8	-6.59	-0.0026	Compliance
-20	3.8	-6.72	-0.0027	Compliance
-10	3.8	-5.94	-0.0023	Compliance
0	3.8	-6.42	-0.0025	Compliance
10	3.8	-5.4	-0.0021	Compliance
20	3.8	-5.73	-0.0023	Compliance
30	3.8	-5.63	-0.0022	Compliance
40	3.8	-6.26	-0.0025	Compliance
50	3.8	-6.69	-0.0026	Compliance
25	3.6	-5.2	-0.0021	Compliance
25	4.3	-5.42	-0.0021	Compliance

Note: The fundamental emissions stay within the authorized bands of operation based on the frequency deviation measured is small.

******* END OF REPORT *******