

**CONFORMANCE TEST REPORT
FOR
FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

Report No. : JNDL-NU-15R-0007

Client: Ericsson-LG Enterprise Co., Ltd..
Product: IP Gigabit Video Phone
Model: LIP-9071
Manufacture/supplier: Ericsson-LG Enterprise Co., Ltd.

Date test item received: November 25, 2015

Date test campaign completed: December 08 , 2015

Date of issue: December 17 , 2015

ATTESTATION STAEMENT

This equipment has been tested in accordance with the standards identified in the referenced test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report and demonstrate that the equipment complies with the appropriate standards.

All **JNDL Laboratory. CO., LTD** instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

Total number of pages of this test report : 27 pages

Test engineer	Report reviewed by
	
Byoung-Su, Shim	Gye-Woog, Lee

APPLICABLE STANDARDS

STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 ISSUE 8	Pass
INDUSTRY CANADA RSS-GEN ISSUE 4	Pass

TEST ENVIRONMENT AND TEST SETUP

Test Facilities :	Test Firm Registration # : 748649 3m & 10m Open Site : 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 3m semi-Anechoic chamber : B 114~115, 810 Kwanyang-Dong, dongan-Gu, Anyang-Si, Kyunggi-Do, 431-060, Korea
Laboratory Test Conditions :	Open Site : Temperature 20 °C, Humidity : 35 % 3m anechoic chamber : Temperature 24 °C, Humidity : 46 %
Test Exercise :	The EUT was set in continuous transmit mode of operation unless stated otherwise.
Modification to the EUT :	No modification was made.
Supporting Accessories :	None

REVISION HISTORY

Revison	Date	Descriptions
0	December 10, 2015	Original release
1	December 17, 2015	Amended inconsistent with the table of contents.

Table of Contents

1. General Remarks

2. Test Site

2.1 Location

2.2 List of Test equipment used for tests

2.3 Test Date

3. Product Information

3.1 Manufacturers declarations

3.2 General Specification

4. Description of Testes

5. Test Condition

6. Test Results

6.1 Summary of Test Results

6.2 Conducted Emissions Measurement

6.3 Spurious Emissions

6.4 13.56 MHz carrier field strength within bands

6.5 Occupied Bandwidth

6.6 Frequency Tolerance

7. Sample Calculation

Appendix. Test Setup Photographs

1. General Remarks

The test results in this report apply to the particular Equipment Under Test (EUT) as declared in this report. The test results presented in this report relate only to the item tested.

2. Test Site

2.1 Location

JNDL Laboratory. CO., LTD. .(Test Firm Registration # : 748649)

3m anechoic chamber : B 114~115, 810 Kwanyang-Dong, dongan-Gu, Anyang-Si, Kyunggi-Do, Korea

3m & 10m Open site : 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

2.2 List of Test equipment used for tests

No.	Instrument	Model No.	Due to Calibration	Manufactor	Serial No.
<input checked="" type="checkbox"/>	EMI TEST RECEIVER (9 KHz ~ 7 GHz)	ESCI7	2016-09-01	Rohde & Schwarz	100933
<input checked="" type="checkbox"/>	EMI TEST RECEIVER (20 MHz ~ 1000 MHz)	ESVS30	2016-09-01	Rohde & Schwarz	828525/005
<input checked="" type="checkbox"/>	AUTORADING POWER SUPPLY	E3630A	2016-09-01	Agilent Technologies	MY40005094
<input checked="" type="checkbox"/>	Active Loop Antenna	6502	2016-11-06	ETS-LINDGREN	00148046
<input checked="" type="checkbox"/>	BILOG ANTENNA (30 MHz ~ 1000 MHz)	VULB 9168	2017-03-15	Schwarzbeck	9168-505
<input checked="" type="checkbox"/>	LISN	ENV216	2016-09-02	Rohde & Schwarz	101456
<input checked="" type="checkbox"/>	EMI RECEIVER (10 KHz ~ 30MHz)	PMM 9010	2016-09-14	Narda S.T.S/PMM	697WW40306
<input checked="" type="checkbox"/>	TEMP. & HUMID. CHAMBER	BJ-THC-667L	2016-09-02	BumJin Engineering	201303-JNDL

→ All equipment is calibrated with traceable calibrations.

Each calibration is traceable to the national or international standards.

2.3 Test Date

Date of Application: November 25, 2015

Date of Test: December 01, 2015 ~ December 08, 2015

3. Product Information

3.1 Equipment Description

The Equipment Under Test(EUT) is the IP Gigabit Video Phone (model : LIP-9071)

The model LIP-9071 is basic model that was tested.

3.2 General Specification

Description	
CPU	Cortex-A9 dual core
OS	Android 4.3 Jelly Bean
DDR (RAM)	1GB DDR3
eMMC Flash	8GB eMMC
External Memory	USB stick up to 32GB
Network	Ethernet switch 2ports (10/100/1000), RJ45
Audio	Handset: standard RJ11 Headset : USB type Speakerphone : Full duplex
Keypad	SPK, Volume +/- Home, Menu, Back DND, Message, Hold, Headset, Mute, Transfer, EC
Power	Power adaptor: 48V/0.3A (option) PoE (802.3af): up to Class 4
USB	Micro USB (for debug), Host USB
HDMI	HDMI A type connector
LCD size	7 inch
LCD resolution	1024 x 600
Touch screen	Multi touch capacitive type

Description	
NFC	Communication Mode: Near Field Communication
	Operating Distance: 90% in 2cm at center point
	Carrier Frequency: 13.56Mhz
	Speed: 106kbps (Max424kbps)
	Bit Coding: BPSK

4. Description of Tests

The tests documented in this report were performed in accordance with ANSI C63.4-2014 and ANSI C63.10-2009 and FCC CFR 47 Part 2 and FCC CFR 47 Part 15, RSS-GEN Issue 4, and RSS-210 Issue 8.

4.1 Radiated Emission Measurement

Radiated emission measurements were made in accordance with § 13 in ANSI C63.4-2014 and ANSI C63.10-2009 "Measurement of Intentional radiators" The measurements were performed over the frequency range of 30 MHz to 40 GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak, Quasi-peak, Average" within a bandwidth of 120 kHz and above 1 GHz is 1 MHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determine the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1 000 MHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site or SVSWR chamber at 3 m. The test equipment was placed on a styrofoam table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8 m high nonmetallic 1.0 m x 1.5 m table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission.

Varying the mode of operating frequencies of the EUT maximized each emission. The system was tested in all the three orthogonal planes and changing the polarity of the antenna. The worst-case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor (20 dB/decade) as per section 15.31(f).

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix .

4.1.1 Radiated Emission Limits:

(1) According to §15.209 Radiated emission limits, general requirements

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequencies [MHz]	Field Strength [μ V/m]	Measurement Distance [m]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 MHz - 72 MHz, 76 MHz - 88 MHz, 174 MHz - 216 MHz or 470 MHz - 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241

4.2 Carrier field strength and field strength outside 13.110 MHz - 14.010 MHz and occupied bandwidth

(1) According to §15.225 Operation within the band 13.110 MHz - 14.010 MHz

- (a) The field strength of any emissions within the band 13.553 MHz - 13.567 MHz shall not exceed 15 848 microvolts/meter at 30 meters
- (b) Within the bands 13.410 MHz - 13.553 MHz and 13.567 MHz - 13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters
- (c) Within the bands 13.110 MHz - 13.410 MHz and 13.710 MHz - 14.010 MHz, the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters
- (d) The field strength of any emissions appearing outside of the 13.110 MHz - 14.010 MHz band shall not exceed the general radiated emission limits in § 15.209

Frequency [MHz]	Field Strength Limit [μ V/m] @ 30 m	Field Strength Limit [dB(μ V/m)] @ 30 m	Field Strength Limit [dB(μ V/m)] @ 3 m
13.110 - 13.410	106	40.5	80.5
13.410 - 13.553	334	50.5	90.5
13.553 - 13.567	15 848	84.0	124.0
13.567 - 13.710	334	50.5	90.5
13.710 - 14.010	106	40.5	80.5

(2) According to §15.215(c) Occupied bandwidth

- (a) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80 % of the permitted band in order to minimize the possibility of out-of-band operation.

4.3 Frequency tolerance

(1) According to §15.225 Operation within the band 13.110 MHz - 14.010 MHz

- (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20 °C. For battery-operated equipment, the equipment tests shall be performed using a new battery.

4.4 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section § 13 in ANSI C63.4-2014 and ANSI C63.10-2009 "measurement of intentional radiators" The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a $50\ \Omega/50\ \mu\text{H}$ LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8 m wooden table which is placed 0.4 m away from the vertical wall and 1.5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1 m length shortened all interconnecting cables more than 1 m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 MHz to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix .

4.5 FCC Part 15.205 Restricted Bands of Operations

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	156.7 - 156.9	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	162.012 5 - 167.17	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	240 - 285	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	322 - 335.4	3 600 - 4 400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490 MHz - 0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

4.6 Antenna connection requirement

(1) According to §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

5. TEST CONDITION


5.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

5.2 Description of Test modes

Automated medication management system that has the control software.

5.3 The setup drawing(s)

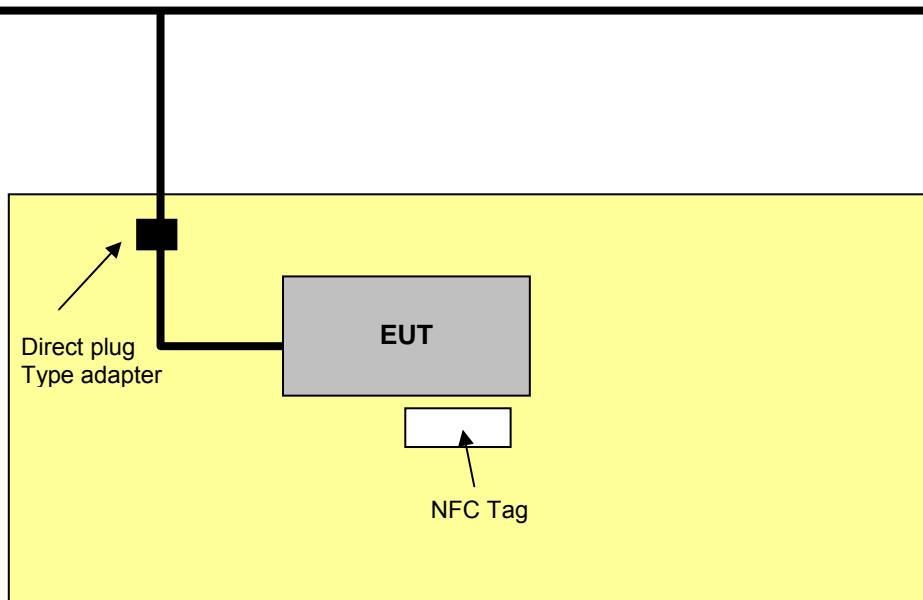

— : Signal line

— : Power line



: Direct plug type adapter

6. TEST RESULTS

6.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

47 CFR Part 15, Subpart C	Measurement Required	Result
15.207(a),(d) IC RSS-GEN, Section 7.2.2	Conducted emissions	Pass
15.209/15.225(d) IC RSS-210, Anex 2, Section A2.6 (Transmitter) IC RSS-GEN, Section 6 (Receiver)	Radiated emissions Field strength outside 13.110 MHz – 14.010 MHz	Pass
15.225(a)(b)(c)	13.56 MHz carrier field strength within the bands	Pass
15.215 IC RSS 210 Issue 8	Occupied Bandwidth	Pass
15.225(e)	Frequency Tolerance	Pass
15.203	Antenna connection requirement	Integral antenna which is permanently attached and cannot be replaced.

The data collected shows that the **Ericsson-LG Enterprise Co., Ltd. / IP Gigabit Video Phone / LIP-9071** complied with technical requirements of above rules part 15.207, 209 and 15.247 Limits.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

6.2 Conducted Emissions Measurement

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission [MHz]	Conducted limit [dB(μ V)]	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

Test Results : Pass

- Refer to see the measured plot in next page.

Conducted Emission Test Data


The following data and graph shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

NOTES:


1. Please see the measured data and graph in next page.
2. The c.f value was included the antenna factor and cable loss.
3. Result value = Reading + c.f
4. Margin value = Limit – Result
5. Measurements were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15 Class A.

Line: HOT

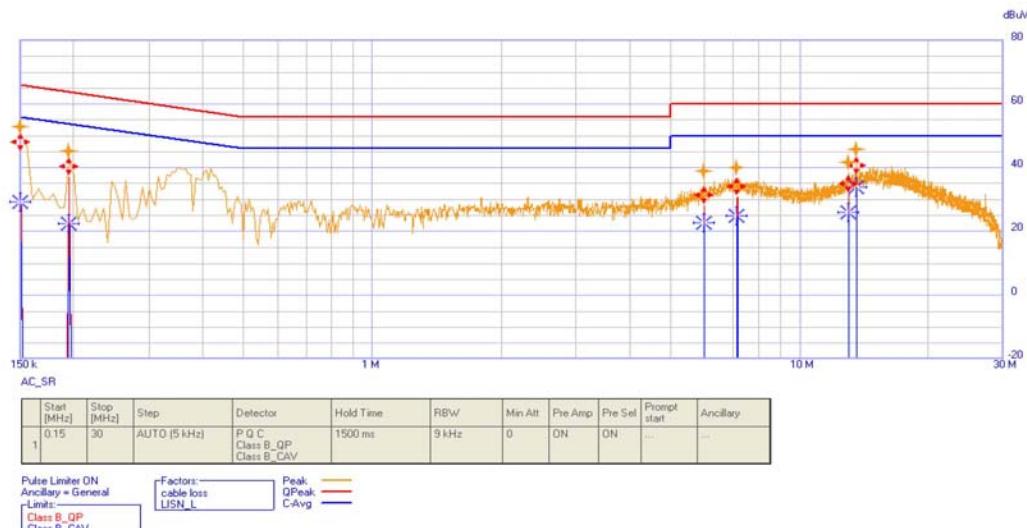

Frequency	QPeak	Limit	Delta	C-Avg	Limit	Delta	Factor	Factor
[MHz]	[dBuV]	Class B_QP	[dBuV]	[dB]	Class B_CAV	[dBuV]	cable loss	LISN_L
1 0.15	44.76	66.00	-21.24	28.91	56.00	-27.09	0.04	9.59
2 0.195	37.18	63.82	-26.64	22.16	53.82	-31.66	0.05	9.58
3 5.97	27.99	60.00	-32.01	22.43	50.00	-27.57	0.11	9.64
4 7.125	30.75	60.00	-29.25	24.60	50.00	-25.40	0.12	9.65
5 13	31.55	60.00	-28.45	25.73	50.00	-24.27	0.17	9.70
6 13.56	37.23	60.00	-22.77	33.50	50.00	-16.50	0.17	9.70

Line: Neutral

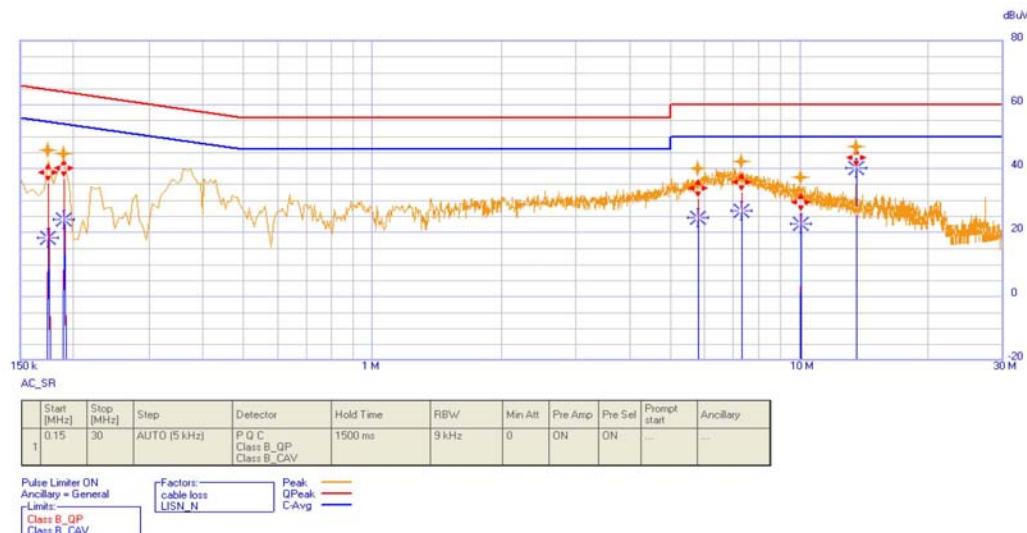


Frequency	QPeak	Limit	Delta	C-Avg	Limit	Delta	Factor	Factor
[MHz]	[dBuV]	Class B_QP	[dB]	[dBuV]	Class B_CAV	[dB]	cable loss	LISN_N
1 0.175	35.43	64.72	-29.29	18.07	54.72	-36.65	0.05	9.59
2 0.19	36.68	64.04	-27.36	23.78	54.04	-30.26	0.05	9.59
3 5.785	30.43	60.00	-29.57	24.25	50.00	-25.75	0.11	9.65
4 7.285	32.34	60.00	-27.66	26.40	50.00	-23.60	0.12	9.66
5 10.005	26.09	60.00	-33.91	22.35	50.00	-27.65	0.15	9.69
6 13.56	40.01	60.00	-19.99	39.99	50.00	-10.01	0.17	9.72

6.3 Spurious Emissions

Limit

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequencies [MHz]	Field Strength [μ V/m]	Measurement Distance [m]
0.009 - 0.490	$2\ 400/F(\text{kHz})$	300
0.490 - 1.705	$24\ 000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 MHz - 72 MHz, 76 MHz - 88 MHz, 174 MHz - 216 MHz or 470 MHz - 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Test Results

- Refer to see the measured plot in next page.

Radiated Emissions Test data

- 9 kHz to 30 MHz

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Detector mode: CISPR Quasi-Peak mode (100 Hz, 9 kHz)

Frequency [MHz]	Reading [dB(μ V)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μ V/m)]	Limit [dB(μ V/m)]	Margin [dB]
	Emission attenuated more than 20 dB below the limit are not reported.						

Result: All emissions below noise floor of 20 dB(μ V/m).

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin = Limit - Result
4. The measurement was performed for the frequency range 9 kHz to 30 MHz according to FCC Part 15.209.

- Below 1 GHz (30 MHz to 1 GHz)

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.



Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 120 kHz)

- Adaptor mode

Emission Frequency [MHz]	Measure Value [dB μ V]	Antenna Pola V/H	Antenna Factor [dB/m]	Cable Loss [dB]	Field Strength dB μ V/m @ 3m	Limit dB μ V/m @ 3m	Margin [dB]
122.40	17.55	V	9.80	1.17	28.52	43.5	14.98
271.32	14.34	V	12.80	1.41	28.55	46.0	17.45
444.85	12.45	V	17.33	1.95	31.73	46.0	14.27
122.40	18.02	H	9.80	1.17	28.99	43.5	14.51
271.32	21.89	H	12.80	1.41	36.10	46.0	9.90
444.85	19.75	H	17.33	1.95	39.03	46.0	6.97

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. The measurement was performed for the frequency range above 30 MHz according to FCC Part 15.209.

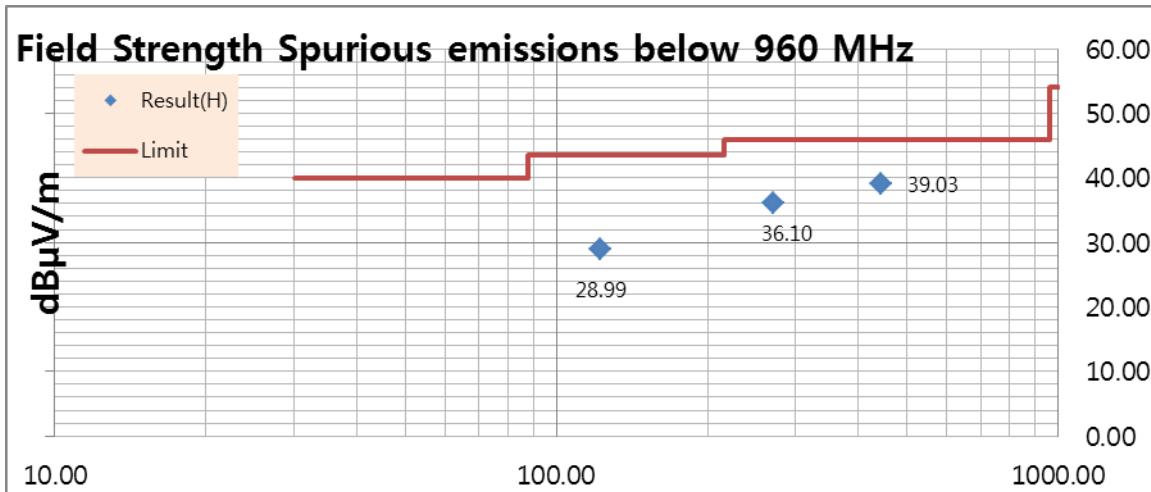
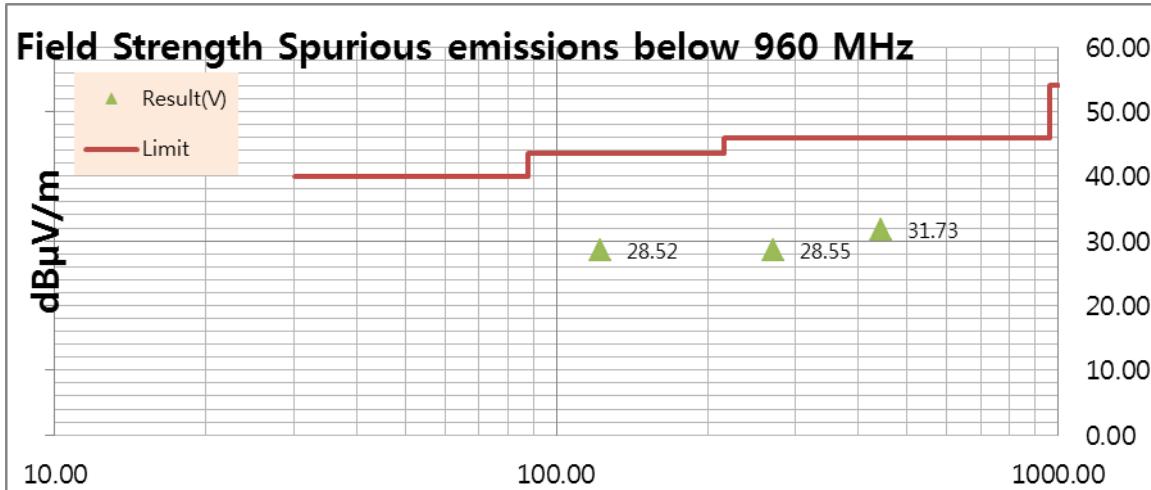


- PoE mode

Emission Frequency [MHz]	Measure Value [dB μ V]	Antenna Pola V/H	Antenna Factor [dB/m]	Cable Loss [dB]	Field Strength dB μ V/m @ 3m	Limit dB μ V/m @ 3m	Margin [dB]
41.71	16.41	V	9.80	1.17	27.38	43.5	16.12
122.40	16.83	V	12.80	1.41	31.04	46.0	14.96
444.85	13.35	V	17.33	1.95	32.63	46.0	13.37
122.40	22.80	H	9.80	1.17	33.77	43.5	9.73
271.32	19.17	H	12.80	1.41	33.38	46.0	12.62
444.85	19.37	H	17.33	1.95	38.65	46.0	7.35

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. The measurement was performed for the frequency range above 30 MHz according to FCC Part 15.209.

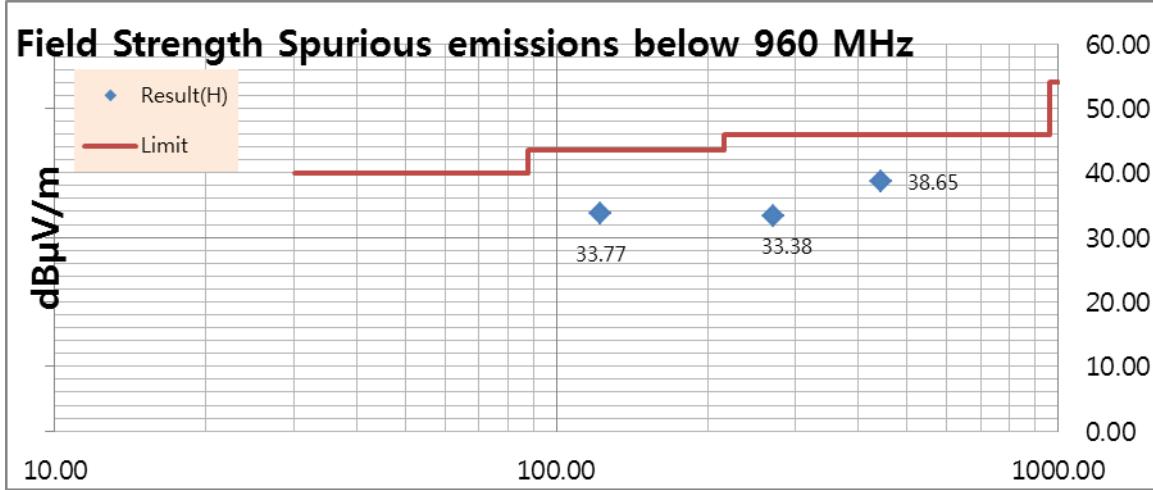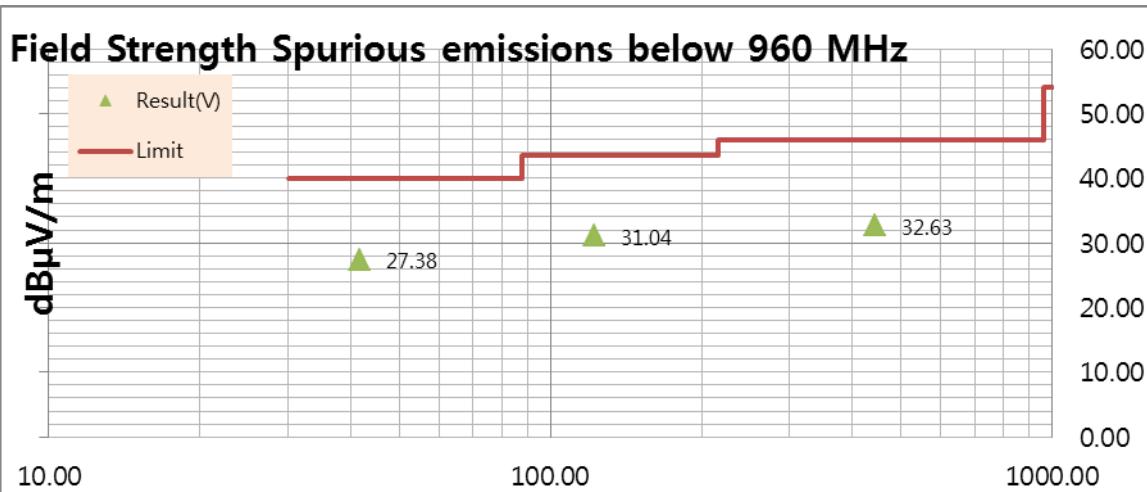

6.4 13.56 MHz carrier field strength within bands


Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.
Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)


Frequency [MHz]	Reading [dB(μ V) @ 3 m]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(μ V/m) @ 3 m]	Limit [dB(μ V/m) @ 3 m]	Margin [dB]	Remark
13.56	42.35	H	7.50	0.38	50.23	124.00	73.77	Adaptor mode
13.56	47.56	V	7.50	0.38	55.44	124.00	68.56	PoE mode

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. The measurement was performed for the frequency range 13.56 MHz according to FCC Part 15.225(a)(b)(c)

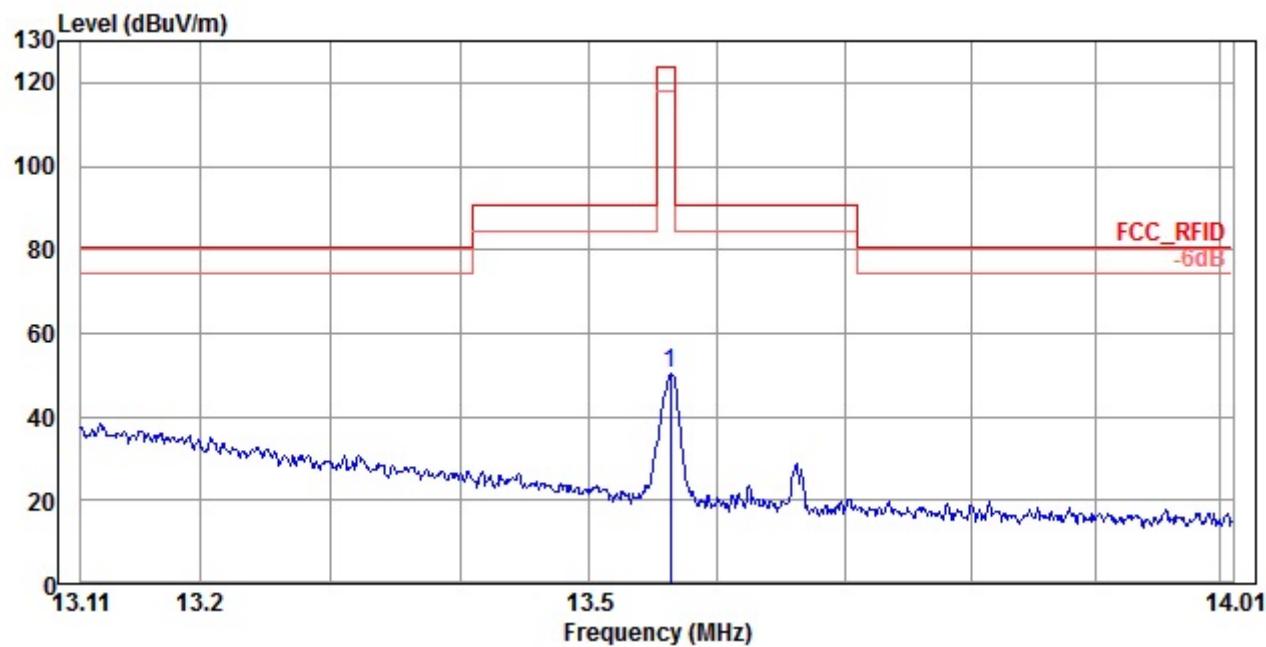

- Adaptor mode -

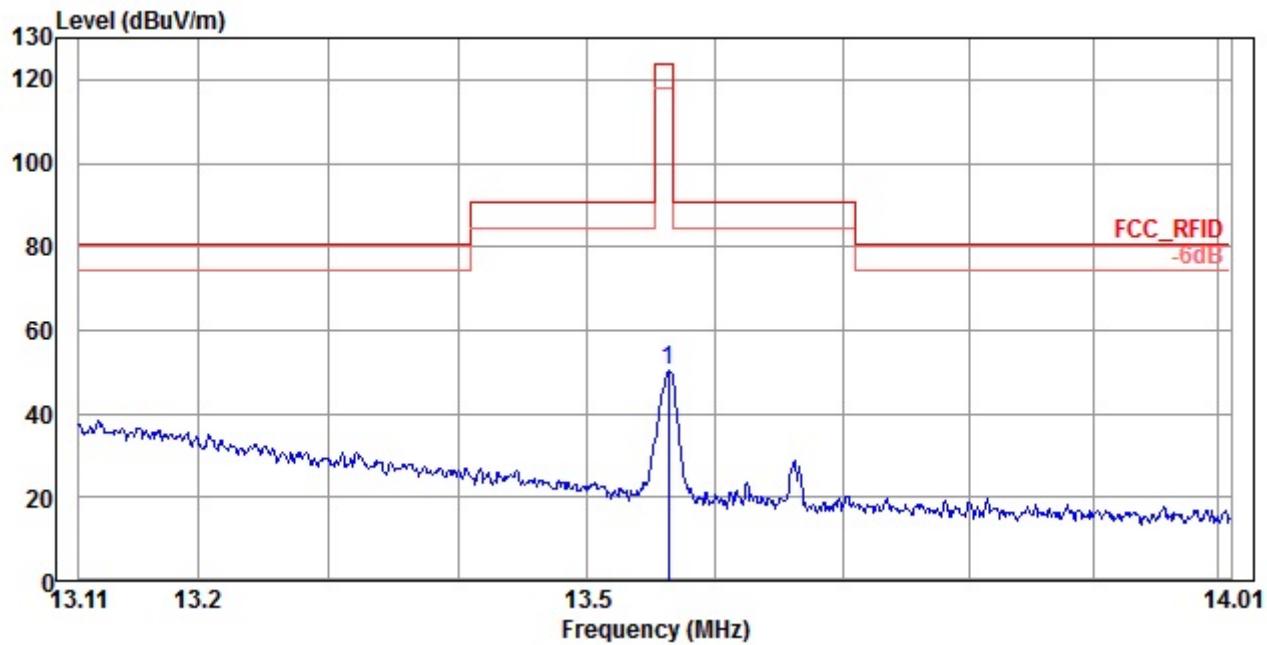

- PoE mode -

6.5 Occupied Bandwidth


6.5.1 Occupied Bandwidth

Frequency [MHz]	20 dB Bandwidth [kHz]	Remark
13.56	8.61	Adaptor mode
13.56	9.03	PoE mode


NOTES:

1. Measure frequency separation of relevant channel using spectrum analyzer.

Plots of 20 dB Bandwidth

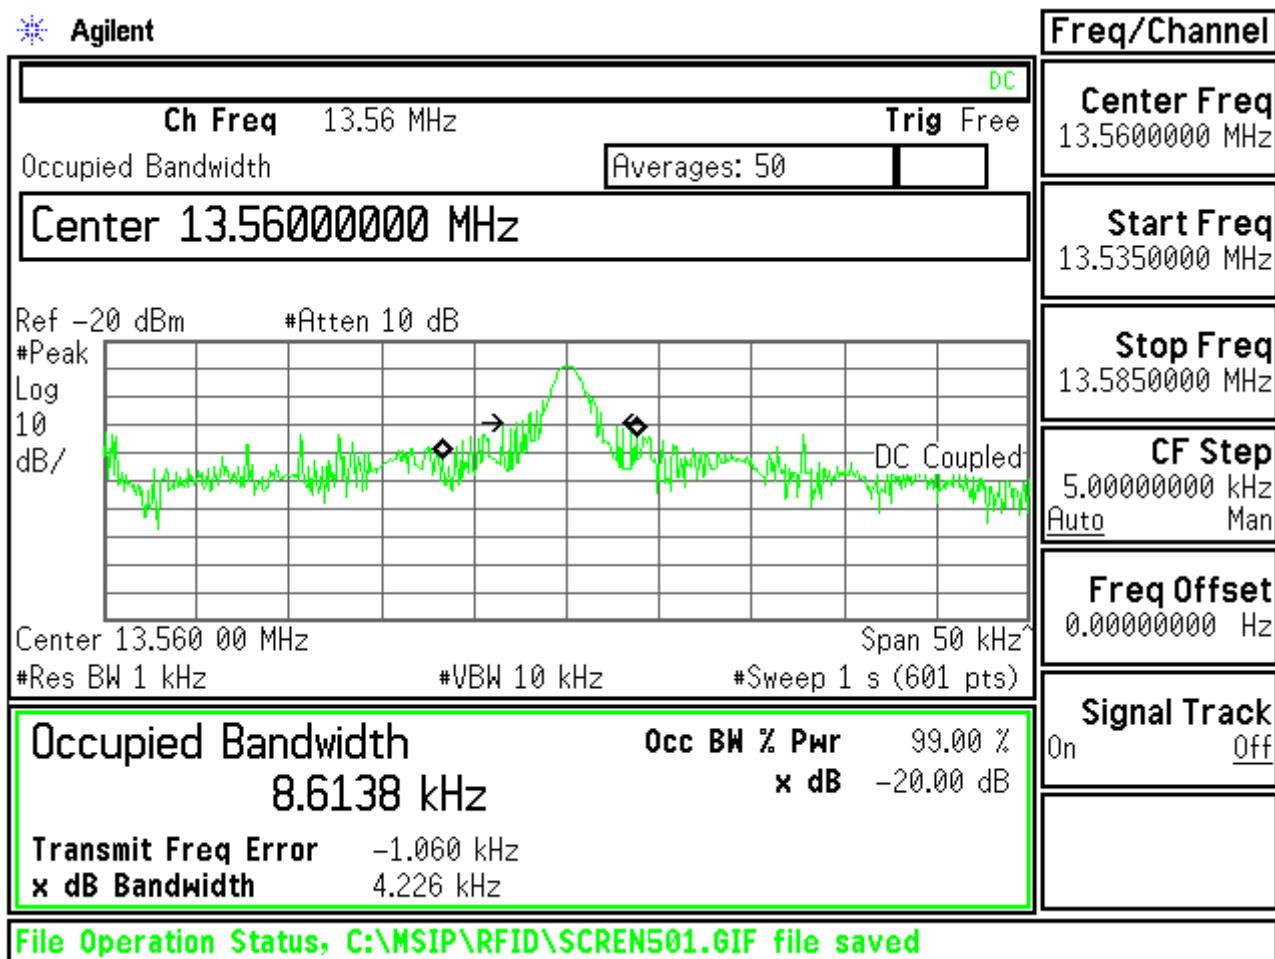

- Adaptor mode

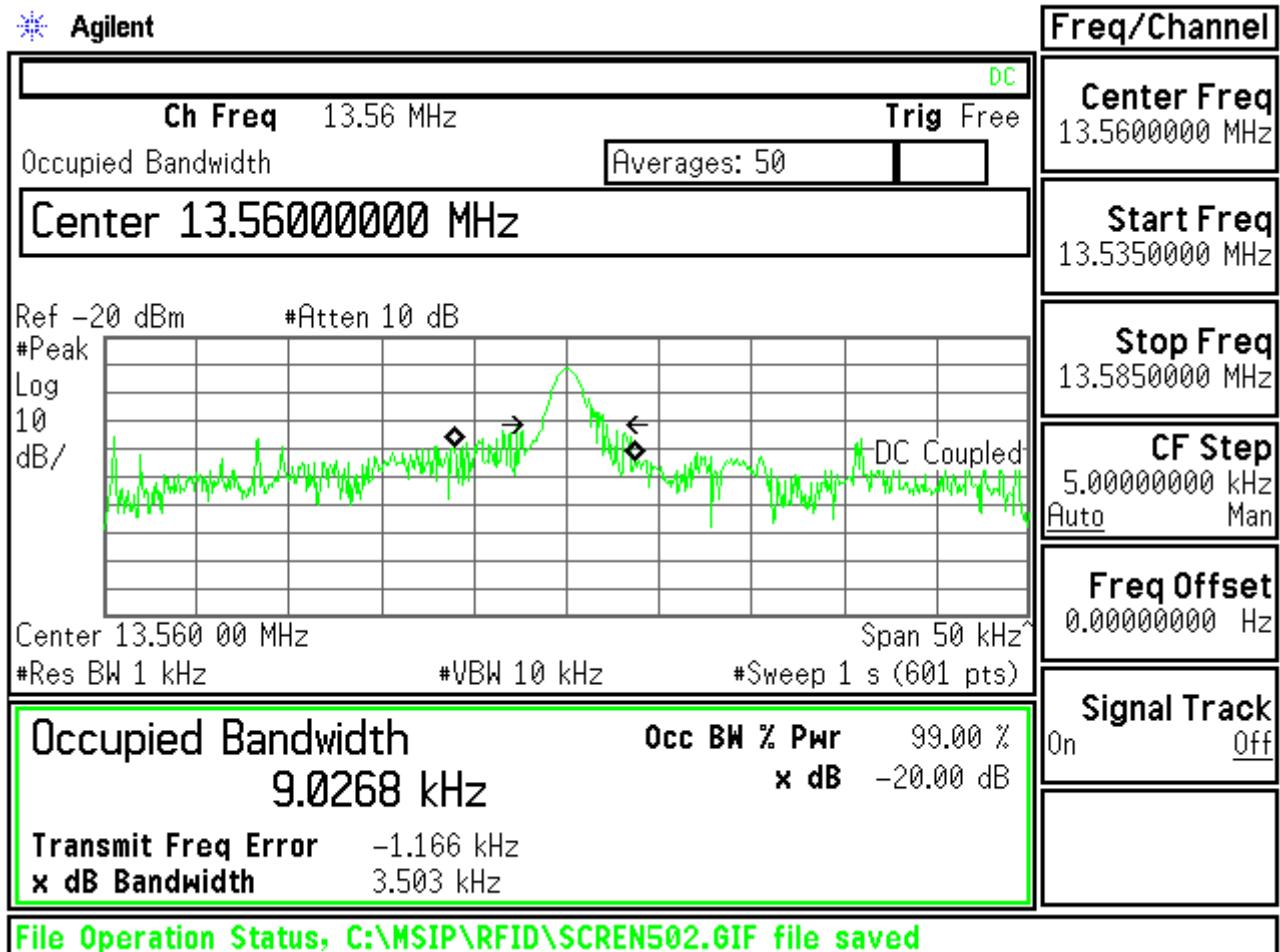

- PoE mode -

6.6 Frequency Tolerance

Frequency Tolerance Test Data

The Frequency Tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of operating frequency over a temperature variation of $-20\text{ }^{\circ}\text{C}$ to $+50\text{ }^{\circ}\text{C}$ at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of $20\text{ }^{\circ}\text{C}$.

- Operating frequency: 13.56 MHz
- Limit: $\pm 1\text{ }356\text{ Hz}$
- Within the band: 13.558 644 MHz - 13.561 356 MHz

Frequency Stability Versus Environment Temperature ($+50\text{ }^{\circ}\text{C} \sim -20\text{ }^{\circ}\text{C}$)

Reference Frequency: 13.56 MHz					Limit: $\pm 1\text{ }356\text{ Hz}$			
Environment Temperature [$^{\circ}\text{C}$]	Frequency Measure with Time Elapsed							
	Start up		2 Minute		5 Minute		10 Minute	
	MHz	Deviation	MHz	Deviation	MHz	Deviation	MHz	Deviation
50	13 560 003	0.000003	13 559 993	-0.000007	13 559 990	-0.000010	13 559 993	-0.000007
40	13 560 027	0.000027	13 560 007	0.000007	13 559 997	-0.000003	13 559 993	-0.000007
30	13 560 060	0.000060	13 560 033	0.000033	13 560 020	0.000020	13 560 010	0.000010
20	13 560 093	0.000093	13 560 060	0.000060	13 560 047	0.000047	13 560 037	0.000037
10	13 560 113	0.000113	13 560 093	0.000093	13 560 077	0.000077	13 560 067	0.000067
0	13 560 117	0.000117	13 560 107	0.000107	13 560 100	0.000100	13 560 093	0.000093
-10	13 560 100	0.000100	13 560 113	0.000113	13 560 113	0.000113	13 560 110	0.000110
-20	13 560 110	0.000110	13 560 113	0.000113	13 560 113	0.000113	13 560 113	0.000113

Frequency Stability Versus Input Power ($\pm 15\%$): Environment Temperature: $25\text{ }^{\circ}\text{C}$

Reference Frequency: 13.56 MHz					Limit: $\pm 1\text{ }356\text{ Hz}$			
Power Supplied [Vac]	Frequency Measure with Time Elapsed							
	Start up		2 Minute		5 Minute		10 Minute	
	MHz	Deviation	MHz	Deviation	MHz	Deviation	MHz	Deviation
102	13 560 007	0.000007	13 560 000	0	13 560 000	0	13 559 997	-0.000003
120	13 559 997	-0.000003	13 560 003	0.000003	13 560 010	0.000001	13 560 003	0.000003
138	13 560 003	0.000003	13 560 000	0	13 560 003	0.000003	13 560 013	0.000013

- Adaptor mode -

Frequency Stability Versus Environment Temperature (+50 °C ~ -20 °C)

Reference Frequency: 13.56 MHz						Limit: ± 1 356 Hz		
Environment Temperature [°C]	Frequency Measure with Time Elapsed							
	Start up		2 Minute		5 Minute		10 Minute	
	MHz	Deviation	MHz	Deviation	MHz	Deviation	MHz	Deviation
50	13 559 997	-0.000003	13 559 990	-0.000010	13 559 990	-0.000010	13 559 993	-0.000007
40	13 560 023	0.000023	13 560 003	0.000003	13 559 997	-0.000003	13 559 993	-0.000007
30	13 560 057	0.000057	13 560 030	0.000030	13 560 017	0.000017	13 560 010	0.000010
20	13 560 080	0.000080	13 560 053	0.000053	13 560 043	0.000043	13 560 033	0.000033
10	13 560 113	0.000113	13 560 087	0.000087	13 560 073	0.000073	13 560 063	0.000063
0	13 560 113	0.000113	13 560 110	0.000110	13 560 100	0.000100	13 560 093	0.000093
-10	13 560 097	0.000097	13 560 113	0.000113	13 560 113	0.000113	13 560 110	0.000110
-20	13 560 113	0.000113	13 560 113	0.000113	13 560 113	0.000113	13 560 113	0.000113

Frequency Stability Versus Input Power (± 15 %): Environment Temperature: 25 °C

Reference Frequency: 13.56 MHz						Limit: ± 1 356 Hz		
Power Supplied [Vdc]	Frequency Measure with Time Elapsed							
	Start up		2 Minute		5 Minute		10 Minute	
	MHz	Deviation	MHz	Deviation	MHz	Deviation	MHz	Deviation
48	13 560 010	0.000010	13 560 003	0.000003	13 560 003	0.000003	13 560 003	0.000003

- PoE mode -

7. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - PA$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

PA* = Preamplifier Factor

* PA is only be used for the measuring frequency above 1 GHz.

$$dB(\mu V) = 20 \log_{10} (\mu V) : \text{Equation}$$


$$dB(\mu V) = dBm + 107$$

Example : @ 444.85 MHz

Class B Limit	= 46.00 dB(μ V/m)
Reading	= 19.37 dB(μ V)
Antenna Factor + Cable Loss	= $17.33 + 1.95 = 19.28$ dB(μ V/m)
Total	= 38.65 dB(μ V/m)
Margin	= $46.00 - 38.65 = 7.35$ dB
	= 7.35 dB below Limit

Test Setup Photographs

Photograph 1: Test Setup for 9 kHz to 30 MHz

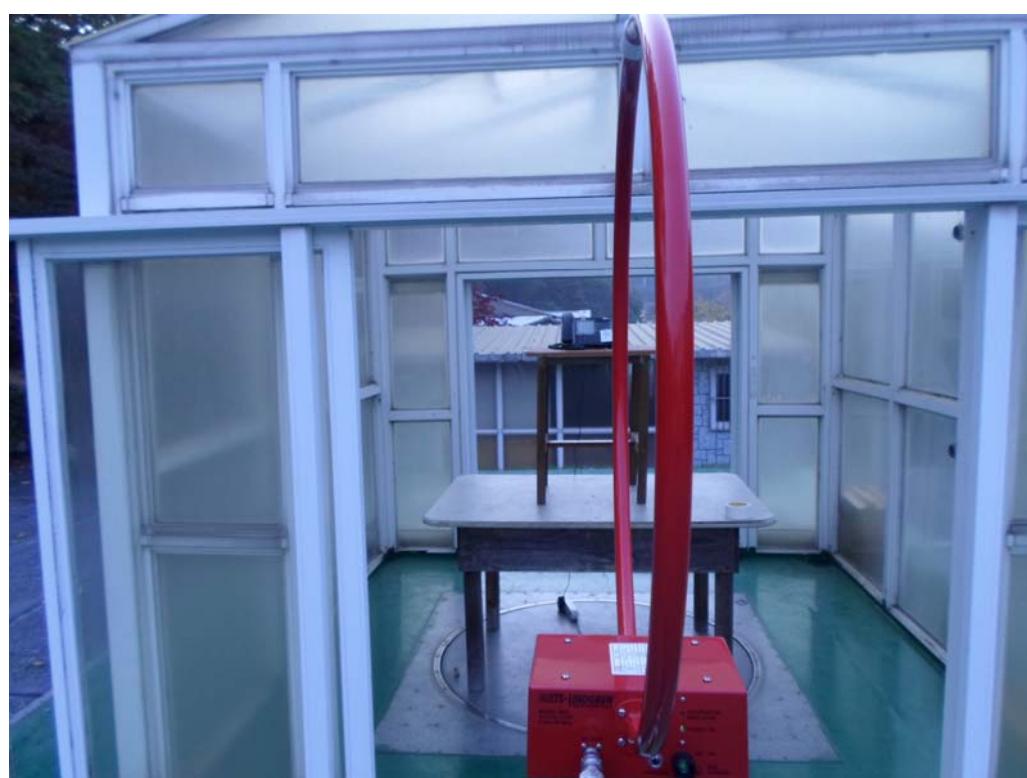

Photograph 2: Test Setup for Below 1 GHz

Photograph 3: Test Setup for Conducted Emission